

Supplemental “Transmit Simultaneously” Test Report

Report No.: RF171204E07-4

FCC ID: Q87-03331

Test Model: WHW01

Series Model: VLP01, A01

Received Date: Dec. 04, 2017

Test Date: Dec. 09, 2017 to Jan. 23, 2018

Issued Date: Feb. 06, 2018

Applicant: Linksys LLC

Address: 121 Theory Drive, Irvine, CA 92617, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

| | |
|--|-----------|
| Release Control Record | 3 |
| 1 Certificate of Conformity | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Modification Record | 5 |
| 3 General Information | 6 |
| 3.1 General Description of EUT | 6 |
| 3.1.1 Test Mode Applicability and Tested Channel Detail | 9 |
| 3.2 Description of Support Units | 11 |
| 3.2.1 Configuration of System under Test | 11 |
| 4 Test Types and Results | 12 |
| 4.1 Radiated Emission and Bandedge Measurement | 12 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement | 12 |
| 4.1.2 Test Instruments | 13 |
| 4.1.3 Test Procedures | 15 |
| 4.1.4 Deviation from Test Standard | 15 |
| 4.1.5 Test Setup | 16 |
| 4.1.6 EUT Operating Conditions | 17 |
| 4.1.7 Test Results | 18 |
| 4.2 Conducted Emission Measurement | 20 |
| 4.2.1 Limits of Conducted Emission Measurement | 20 |
| 4.2.2 Test Instruments | 20 |
| 4.2.3 Test Procedures | 21 |
| 4.2.4 Deviation from Test Standard | 21 |
| 4.2.5 Test Setup | 21 |
| 4.2.6 EUT Operating Conditions | 21 |
| 4.2.7 Test Results (Mode 1) | 22 |
| 4.2.8 Test Results (Mode 2) | 24 |
| 4.2.9 Test Results (Mode 3) | 26 |
| 4.2.10 Test Results (Mode 4) | 28 |
| 4.3 Conducted Out of Band Emission Measurement | 30 |
| 4.3.1 Limits of Conducted Out of Band Emission Measurement | 30 |
| 4.3.2 Test Setup | 30 |
| 4.3.3 Test Instruments | 30 |
| 4.3.4 Test Procedures | 30 |
| 4.3.5 Deviation from Test Standard | 30 |
| 4.3.6 EUT Operating Conditions | 30 |
| 4.3.7 Test Results | 30 |
| 5 Pictures of Test Arrangements | 32 |
| Appendix – Information on the Testing Laboratories | 33 |

Release Control Record

| Issue No. | Description | Date Issued |
|---------------|-------------------|---------------|
| RF171204E07-4 | Original release. | Feb. 06, 2018 |

1 Certificate of Conformity

Product: Velop

Brand: Linksys

Test Model: WHW01

Series Model: VLP01, A01

Sample Status: ENGINEERING SAMPLE

Applicant: Linksys LLC

Test Date: Dec. 09, 2017 to Jan. 23, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Feb. 06, 2018
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Feb. 06, 2018
May Chen / Manager

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C, E (SECTION 15.247, 15.407) | | | |
|--|--|--------|--|
| FCC Clause | Test Item | Result | Remarks |
| 15.207 15.407(b)(6) | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -3.03dB at 0.49862MHz. |
| 15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6) | Radiated Emissions and Band Edge Measurement | PASS | Meet the requirement of limit. Minimum passing margin is -2.9dB at 17475.00MHz. |

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (±) |
|------------------------------------|----------------|--------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 1.84 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 5.53 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz | 5.08 dB |
| | 6GHz ~ 18GHz | 4.98 dB |
| | 18GHz ~ 40GHz | 5.19 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | | |
|-----------------------|--------------------------|---|
| Product | Velop | |
| Brand | Linksys | |
| Test Model | WHW01 | |
| Series Model | VLP01, A01 | |
| Status of EUT | ENGINEERING SAMPLE | |
| Driver version | 1.1.3.186486 | |
| Power Supply Rating | 12Vdc from power adapter | |
| Modulation Type | WLAN | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz |
| | BT-EDR | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| | BT-LE | GFSK |
| Modulation Technology | WLAN | DSSS, OFDM |
| | BT-EDR | FHSS |
| | BT-LE | DTS |
| Transfer Rate | WLAN | 802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps |
| | BT-EDR | Up to 3Mbps |
| | BT-LE | Up to 1Mbps |
| Operating Frequency | WLAN | 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz |
| | BT-EDR | 2402MHz ~ 2480MHz |
| | BT-LE | 2402MHz ~ 2480MHz |
| Number of Channel | WLAN | 2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2 |
| | BT-EDR | 79 |
| | BT-LE | 40 |
| Antenna Type | Refer to Note | |
| Antenna Connector | Refer to Note | |
| Accessory Device | Adapter x 1 | |
| Data Cable Supplied | NA | |

Note:

1. There are WLAN and Bluetooth technology used for the EUT.
2. The EUT has below model names, which are identical to each other in all aspects except for the following table:

| Brand | Model Name | Different |
|---------|------------|---|
| Linksys | WHW01 | For maketing request Color : Black & White |
| | VLP01 | |
| | A01 | |

From the above models, model: **WHW01** was selected as representative model for the test and its data was recorded in this report.

3. Simultaneously transmission condition.

| Condition | Technology | | |
|-----------|-------------|-----------|-----------|
| 1 | WLAN 2.4GHz | WLAN 5GHz | Bluetooth |

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

| No. | Brand | Model No. | Spec. | Plug | Remark |
|-----|-------|------------------|---|-----------|---------------|
| 1 | APD | WA-12M12R | Input: 100-240Vac, 0.5A, 50-60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m | Universal | Black & White |
| 2 | APD | WB-12G12FU | Input: 100-240Vac, 0.3A, 50-60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m | FCC | Black & White |
| 3 | Ktec | KSAS0121200100D5 | Input: 100-240Vac, 0.4A, 50-60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m | Universal | Black & White |
| 4 | Ktec | KSA-12W-120100VU | Input: 100-240Vac, 0.4A, 50/60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m | FCC | Black & White |

Note: From the above models, the worst radiated emission test was found in **Adapter 4**. Therefore only the test data of the modes were recorded in this report.

5. The DDR3 Memory of EUT as following table

| Item | Brand | Model No. | Different |
|---------------|---------|------------------|---|
| Main source | Winbond | W632GU6MB-12 | 1. For maketing request. 2. DDR3 Memory. |
| Second source | Nanya | NT5CC128M16IP-DI | |

Note: From the above models, the worst case was found in **Main source**. Therefore only the test data of the modes were recorded in this report.

6. The antennas provided to the EUT, please refer to the following table:

| WLAN | | | | | | |
|-----------|-----------|--------------|--------------------|----------------------|--------------|----------------|
| Ant No. | Brand | Model | Antenna Gain (dBi) | Frequency rang (GHz) | Antenna type | Connector type |
| 1 | ARISTOTLE | AP571-P11-P2 | 2.4 | 2.4~2.4835 | PCB | i-pex(MHF) |
| | | | 3.6 | 5.15~5.85 | | |
| 2 | ARISTOTLE | AP571-P22-P5 | 1.36 | 2.4~2.4835 | PCB | i-pex(MHF) |
| | | | 3.5 | 5.15~5.85 | | |
| Bluetooth | | | | | | |
| Ant No. | Brand | Model | Antenna Gain (dBi) | Frequency rang (GHz) | Antenna type | Connector type |
| 1 | ARISTOTLE | AP571-BT-1 | 1.48 | 2.4~2.4835 | PCB | i-pex(MHF) |

7. The EUT incorporates a MIMO function.

| 2.4GHz Band | | | |
|------------------|-----------------|-----------------------|-----|
| MODULATION MODE | DATA RATE (MCS) | TX & RX CONFIGURATION | |
| 802.11b | 1 ~ 11Mbps | 2TX | 2RX |
| 802.11g | 6 ~ 54Mbps | 2TX | 2RX |
| 802.11n (HT20) | MCS 0~7 | 2TX | 2RX |
| | MCS 8~15 | 2TX | 2RX |
| 802.11n (HT40) | MCS 0~7 | 2TX | 2RX |
| | MCS 8~15 | 2TX | 2RX |
| VHT20 | MCS0~8 Nss=1 | 2TX | 2RX |
| | MCS0~8 Nss=2 | 2TX | 2RX |
| VHT40 | MCS0~9 Nss=1 | 2TX | 2RX |
| | MCS0~9 Nss=2 | 2TX | 2RX |
| 5GHz Band | | | |
| MODULATION MODE | DATA RATE (MCS) | TX & RX CONFIGURATION | |
| 802.11a | 6 ~ 54Mbps | 2TX | 2RX |
| 802.11n (HT20) | MCS 0~7 | 2TX | 2RX |
| | MCS 8~15 | 2TX | 2RX |
| 802.11n (HT40) | MCS 0~7 | 2TX | 2RX |
| | MCS 8~15 | 2TX | 2RX |
| 802.11ac (VHT20) | MCS0~8 Nss=1 | 2TX | 2RX |
| | MCS0~8 Nss=2 | 2TX | 2RX |
| 802.11ac (VHT40) | MCS0~9 Nss=1 | 2TX | 2RX |
| | MCS0~9 Nss=2 | 2TX | 2RX |
| 802.11ac (VHT80) | MCS0~9 Nss=1 | 2TX | 2RX |
| | MCS0~9 Nss=2 | 2TX | 2RX |

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.1.1 Test Mode Applicability and Tested Channel Detail

| EUT Configure Mode | Applicable To | | | | Description |
|--------------------|---------------|-------|-----|----|----------------------|
| | RE≥1G | RE<1G | PLC | OB | |
| 1 | - | - | √ | - | Power from Adapter 1 |
| 2 | - | - | √ | - | Power from Adapter 2 |
| 3 | - | - | √ | - | Power from Adapter 3 |
| 4 | √ | √ | √ | √ | Power from Adapter 4 |

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **OB**: Conducted Out-Band Emission Measurement

NOTE: “-” means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE |
|---|------------------------|----------------|-----------------------|-----------------|
| 802.11b + 802.11ac (VHT20) + BT-EDR | 1 to 11 | 1 | DSSS | DBPSK |
| | 36 to 48 149 to 165 | 165 | OFDM | BPSK |
| | 0 to 78 | 78 | FHSS | GFSK |

Radiated Emission Test (Below 1GHz):

- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE |
|---|------------------------|----------------|-----------------------|-----------------|
| 802.11b + 802.11ac (VHT20) + BT-EDR | 1 to 11 | 1 | DSSS | DBPSK |
| | 36 to 48 149 to 165 | 165 | OFDM | BPSK |
| | 0 to 78 | 78 | FHSS | GFSK |

Power Line Conducted Emission Test:

☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE |
|---|------------------------|----------------|-----------------------|-----------------|
| 802.11b + 802.11ac (VHT20) + BT-EDR | 1 to 11 | 1 | DSSS | DBPSK |
| | 36 to 48 149 to 165 | 165 | OFDM | BPSK |
| | 0 to 78 | 78 | FHSS | GFSK |

Conducted Out-Band Emission Measurement:

☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE |
|----------------------------------|------------------------|----------------|-----------------------|-----------------|
| 802.11b + 802.11ac (VHT20) | 1 to 11 | 1 | DSSS | DBPSK |
| | 36 to 48 149 to 165 | 165 | OFDM | BPSK |

Test Condition:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|--------------|--------------|
| RE \geq 1G | 23deg. C, 68%RH | 120Vac, 60Hz | Weiwei Lo |
| RE<1G | 23deg. C, 68%RH | 120Vac, 60Hz | Frank Chuang |
| PLC | 25deg. C, 75%RH | 120Vac, 60Hz | Andy Ho |
| OB | 25deg. C, 65%RH | 120Vac, 60Hz | Jyunchun Lin |

3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|---------|-------|-----------|------------|---------|-----------------|
| A. | Laptop | DELL | E6420 | B92T3R1 | FCC DoC | Provided by Lab |


Note:

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------|------|------------|--------------------|--------------|--------------------|
| 1. | DC Cable | 1 | 1.5 | No | 0 | Supplied by client |
| 2. | RJ-45 Cable | 1 | 10 | No | 0 | Provided by Lab |

Note: The core(s) is(are) originally attached to the cable(s).

3.2.1 Configuration of System under Test

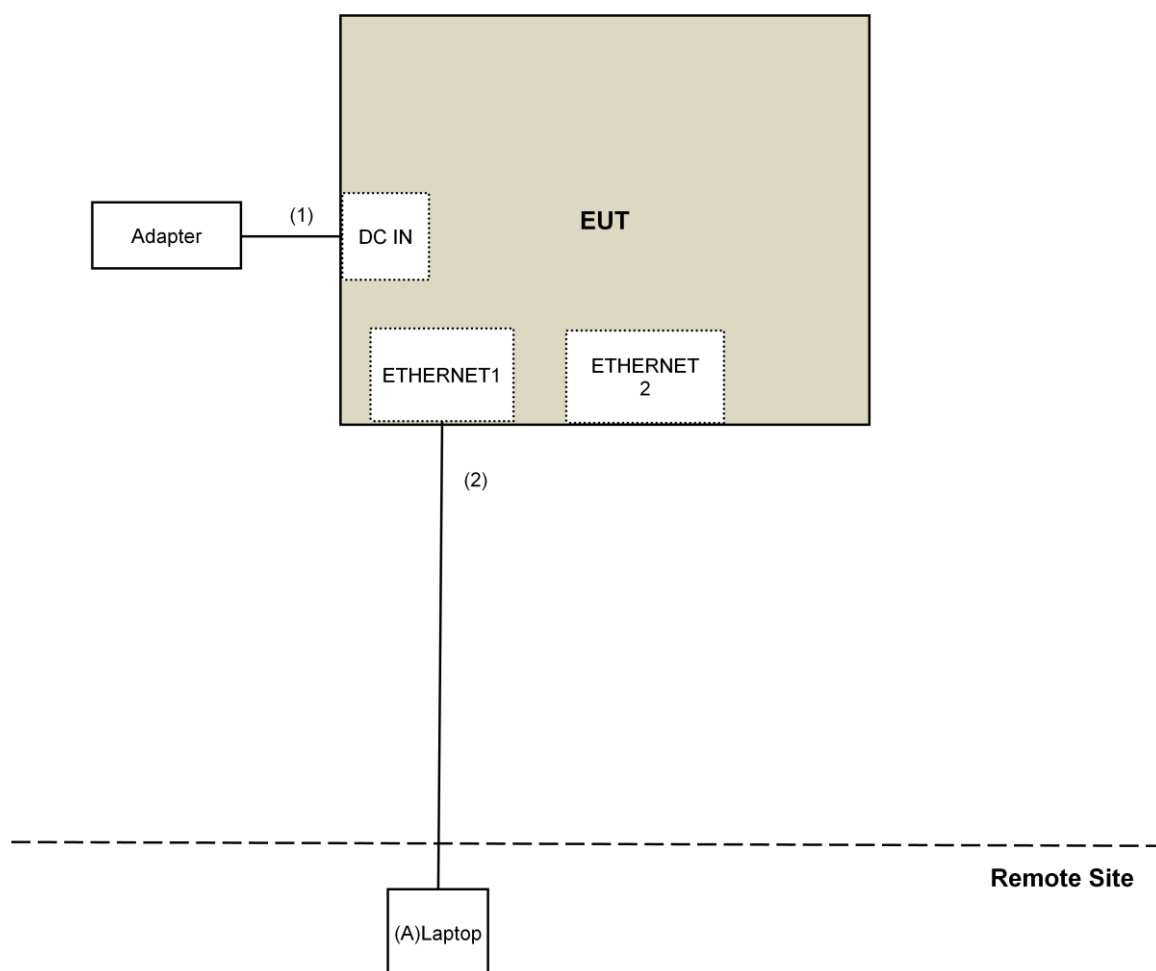

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

| Applicable To | | | Limit | |
|--|-------------------------------------|------------------|---|---|
| 789033 D02 General UNII Test Procedure New Rules v02r01 | | | Field Strength at 3m | |
| | | | PK:74 (dBµV/m) | AV:54 (dBµV/m) |
| Frequency Band | Applicable To | | EIRP Limit | Equivalent Field Strength at 3m |
| 5150~5250 MHz | 15.407(b)(1) | | PK:-27 (dBm/MHz) | PK:68.2(dBµV/m) |
| 5250~5350 MHz | 15.407(b)(2) | | | |
| 5470~5725 MHz | 15.407(b)(3) | | | |
| 5725~5850 MHz | <input checked="" type="checkbox"/> | 15.407(b)(4)(i) | PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4} | PK: 68.2(dBµV/m) ^{*1} PK:105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK:122.2 (dBµV/m) ^{*4} |
| | <input type="checkbox"/> | 15.407(b)(4)(ii) | Emission limits in section 15.247(d) | |
| ^{*1} beyond 75 MHz or more above of the band edge. | | | ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. | |
| ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. | | | ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. | |

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

For below 1GHz test:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|----------------------|-------------------------------|-----------------|------------------|
| Test Receiver Agilent | N9038A | MY50010156 | July 12, 2017 | July 11, 2018 |
| Loop Antenna ^(*) TESEQ | HLA 6121 | 45745 | May 19, 2017 | May 18, 2018 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2B | AMP-ZFL-05 | May 06, 2017 | May 05, 2018 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-361 | Nov. 29, 2017 | Nov. 28, 2018 |
| RF Cable | 8D | 966-3-1 966-3-2 966-3-3 | Apr. 01, 2017 | Mar. 31, 2018 |
| Fixed attenuator Mini-Circuits | UNAT-5+ | PAD-3m-3-01 | Oct. 03, 2017 | Oct. 02, 2018 |
| Software | ADT_Radiated_V8.7.08 | NA | NA | NA |
| Antenna Tower & Turn Table Max-Full | MF-7802 | MF780208406 | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Jan. 23, 2018

For other test:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|----------------------|--------------------|-----------------|------------------|
| Test Receiver Agilent | N9038A | MY50010156 | July 12, 2017 | July 11, 2018 |
| Horn_Antenna SCHWARZBECK | BBHA9120-D | 9120D-406 | Dec. 28, 2016 | Dec. 27, 2017 |
| Pre-Amplifier EMCI | EMC12630SE | 980384 | Feb. 02, 2017 | Feb. 01, 2018 |
| RF Cable | EMC104-SM-SM-1200 | 160922 | Feb. 02, 2017 | Feb. 01, 2018 |
| | EMC104-SM-SM-2000 | 150317 | Mar. 29, 2017 | Mar. 28, 2018 |
| | EMC104-SM-SM-5000 | 150322 | Mar. 29, 2017 | Mar. 28, 2018 |
| Spectrum Analyzer Keysight | N9030A | MY54490679 | July 25, 2017 | July 24, 2018 |
| Pre-Amplifier EMCI | EMC184045SE | 980386 | Feb. 02, 2017 | Feb. 01, 2018 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | BBHA9170608 | Dec. 15, 2016 | Dec. 14, 2017 |
| RF Cable | SUCOFLEX 102 | 36432/2 36433/2 | Jan. 15, 2017 | Jan. 14, 2018 |
| Software | ADT_Radiated_V8.7.08 | NA | NA | NA |
| Antenna Tower & Turn Table Max-Full | MF-7802 | MF780208406 | NA | NA |
| Boresight Antenna Fixture | FBA-01 | FBA-SIP01 | NA | NA |
| Spectrum Analyzer R&S | FSv40 | 100964 | July 1, 2017 | June 30, 2018 |
| Power meter Anritsu | ML2495A | 1014008 | May 11, 2017 | May 10, 2018 |
| Power sensor Anritsu | MA2411B | 0917122 | May 11, 2017 | May 10, 2018 |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Dec. 12, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

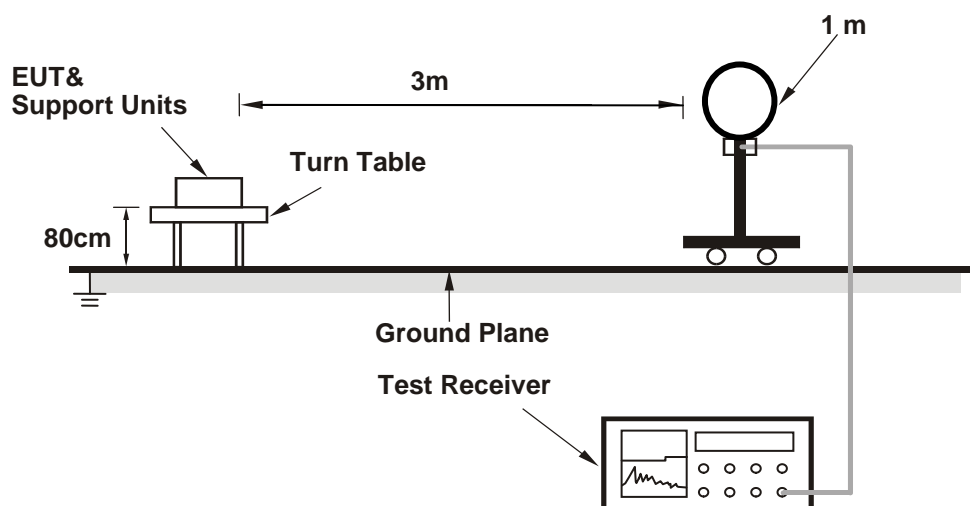

For Radiated emission 30MHz to 1GHz

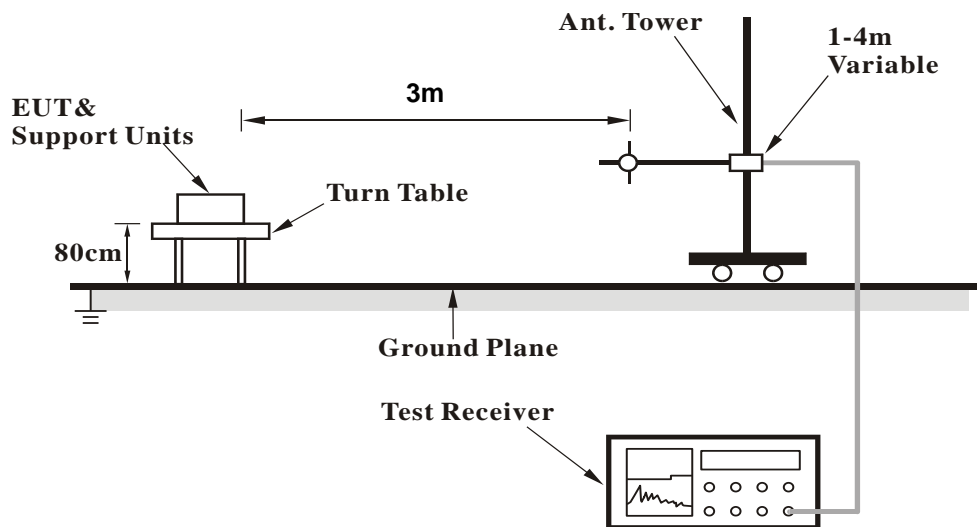

For Radiated emission above 1GHz

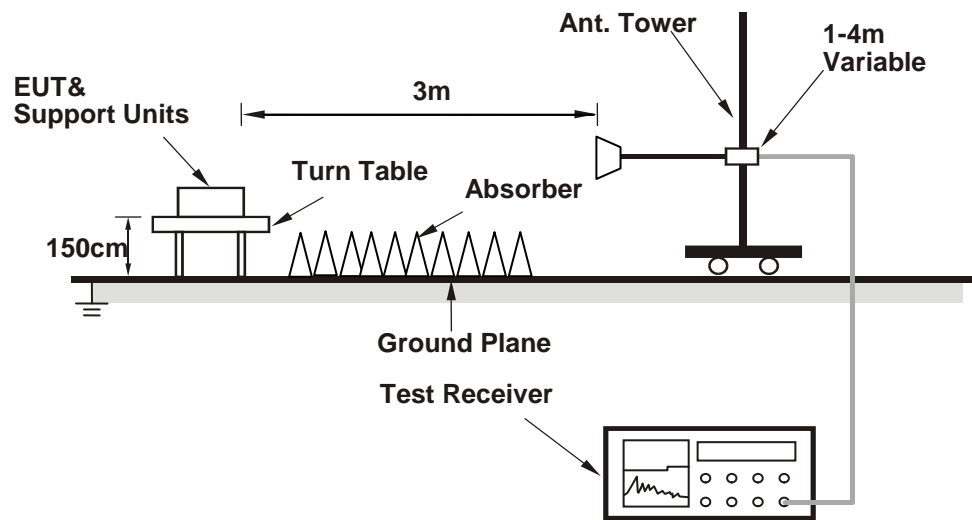

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the laptop which is placed on remote site.
- b. Controlling software (WLAN: QARCT.EXE V3.0.210.0, Bluetooth: BT+LE Command.txt) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data

| | | | |
|------------------------|--------------|--------------------------|---------------------------|
| FREQUENCY RANGE | 1GHz ~ 40GHz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
|------------------------|--------------|--------------------------|---------------------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 4824.00 | 44.0 PK | 74.0 | -30.0 | 1.39 H | 205 | 41.0 | 3.0 |
| 2 | 4824.00 | 40.7 AV | 54.0 | -13.3 | 1.39 H | 205 | 37.7 | 3.0 |
| 3 | 4960.00 | 46.0 PK | 74.0 | -28.0 | 2.54 H | 183 | 42.8 | 3.2 |
| 4 | 4960.00 | 39.1 AV | 54.0 | -14.9 | 2.54 H | 183 | 35.9 | 3.2 |
| 5 | 7440.00 | 43.8 PK | 74.0 | -30.2 | 1.68 H | 32 | 34.6 | 9.2 |
| 6 | 7440.00 | 33.3 AV | 54.0 | -20.7 | 1.68 H | 32 | 24.1 | 9.2 |
| 7 | 11650.00 | 49.3 PK | 74.0 | -24.7 | 1.70 H | 263 | 35.6 | 13.7 |
| 8 | 11650.00 | 37.7 AV | 54.0 | -16.3 | 1.70 H | 263 | 24.0 | 13.7 |
| 9 | 17475.00 | 64.2 PK | 74.0 | -9.8 | 1.64 H | 106 | 45.6 | 18.6 |
| 10 | 17475.00 | 51.1 AV | 54.0 | -2.9 | 1.64 H | 106 | 32.5 | 18.6 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 4824.00 | 43.7 PK | 74.0 | -30.3 | 1.81 V | 182 | 40.7 | 3.0 |
| 2 | 4824.00 | 39.5 AV | 54.0 | -14.5 | 1.81 V | 182 | 36.5 | 3.0 |
| 3 | 4960.00 | 44.9 PK | 74.0 | -29.1 | 2.47 V | 81 | 41.7 | 3.2 |
| 4 | 4960.00 | 39.0 AV | 54.0 | -15.0 | 2.47 V | 81 | 35.8 | 3.2 |
| 5 | 7440.00 | 42.2 PK | 74.0 | -31.8 | 1.56 V | 359 | 33.0 | 9.2 |
| 6 | 7440.00 | 32.1 AV | 54.0 | -21.9 | 1.56 V | 359 | 22.9 | 9.2 |
| 7 | 11650.00 | 52.9 PK | 74.0 | -21.1 | 2.57 V | 67 | 39.2 | 13.7 |
| 8 | 11650.00 | 40.0 AV | 54.0 | -14.0 | 2.57 V | 67 | 26.3 | 13.7 |
| 9 | 17475.00 | 56.4 PK | 74.0 | -17.6 | 1.49 V | 191 | 37.8 | 18.6 |
| 10 | 17475.00 | 44.2 AV | 54.0 | -9.8 | 1.49 V | 191 | 25.6 | 18.6 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Below 1GHz Data:

| | | | |
|------------------------|-------------|--------------------------|-----------------|
| FREQUENCY RANGE | 9kHz ~ 1GHz | DETECTOR FUNCTION | Quasi-Peak (QP) |
|------------------------|-------------|--------------------------|-----------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 125.24 | 33.5 QP | 43.5 | -10.0 | 1.00 H | 75 | 43.2 | -9.7 |
| 2 | 143.09 | 33.7 QP | 43.5 | -9.8 | 3.00 H | 321 | 42.0 | -8.3 |
| 3 | 250.13 | 31.5 QP | 46.0 | -14.5 | 2.00 H | 214 | 41.0 | -9.5 |
| 4 | 356.36 | 31.3 QP | 46.0 | -14.7 | 1.50 H | 153 | 37.7 | -6.4 |
| 5 | 447.29 | 28.9 QP | 46.0 | -17.1 | 2.50 H | 174 | 32.6 | -3.7 |
| 6 | 649.84 | 30.0 QP | 46.0 | -16.0 | 1.00 H | 261 | 30.1 | -0.1 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 50.78 | 36.5 QP | 40.0 | -3.5 | 1.00 V | 232 | 44.8 | -8.3 |
| 2 | 102.09 | 35.4 QP | 43.5 | -8.1 | 1.50 V | 140 | 47.5 | -12.1 |
| 3 | 125.21 | 37.3 QP | 43.5 | -6.2 | 2.00 V | 129 | 47.0 | -9.7 |
| 4 | 249.89 | 29.0 QP | 46.0 | -17.0 | 3.00 V | 214 | 38.5 | -9.5 |
| 5 | 356.47 | 32.6 QP | 46.0 | -13.4 | 1.50 V | 110 | 39.0 | -6.4 |
| 6 | 611.09 | 30.9 QP | 46.0 | -15.1 | 1.50 V | 249 | 31.7 | -0.8 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|-------------------------|------------|-----------------|------------------|
| Test Receiver R&S | ESCS 30 | 847124/029 | Nov. 01, 2017 | Oct. 31, 2018 |
| Line-Impedance Stabilization Network (for EUT) R&S | ESH3-Z5 | 848773/004 | Nov. 15, 2017 | Nov. 14, 2018 |
| Line-Impedance Stabilization Network (for Peripheral) R&S | ENV216 | 100072 | June 03, 2017 | June 02, 2018 |
| 50 ohms Terminator | N/A | EMC-02 | Sep. 22, 2017 | Sep. 21, 2018 |
| RF Cable | 5D-FB | COCCAB-001 | Sep. 29, 2017 | Sep. 28, 2018 |
| 10 dB PAD Mini-Circuits | HAT-10+ | CONATT-004 | June 18, 2017 | June 17, 2018 |
| Software BVADT | BVADT_Cond_ V7.3.7.4 | NA | NA | NA |

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: Dec. 12, 2017

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

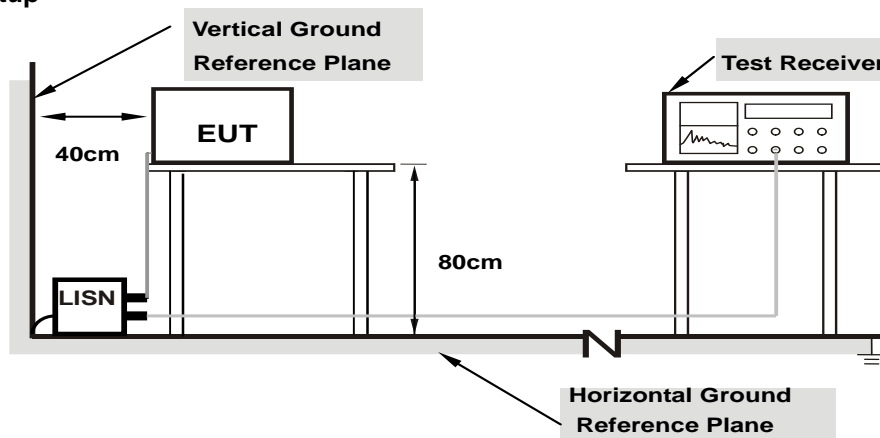

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| Phase Of Power : Line (L) | | | | | | | | | | |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.16172 | 10.08 | 35.85 | 23.12 | 45.93 | 33.20 | 65.38 | 55.38 | -19.45 | -22.18 |
| 2 | 0.23203 | 10.08 | 32.98 | 20.53 | 43.06 | 30.61 | 62.38 | 52.38 | -19.32 | -21.77 |
| 3 | 0.30625 | 10.10 | 30.13 | 16.67 | 40.23 | 26.77 | 60.07 | 50.07 | -19.84 | -23.30 |
| 4 | 0.39609 | 10.12 | 35.07 | 26.16 | 45.19 | 36.28 | 57.93 | 47.93 | -12.74 | -11.65 |
| 5 | 0.71250 | 10.15 | 20.27 | 10.23 | 30.42 | 20.38 | 56.00 | 46.00 | -25.58 | -25.62 |
| 6 | 3.56250 | 10.32 | 24.87 | 16.49 | 35.19 | 26.81 | 56.00 | 46.00 | -20.81 | -19.19 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

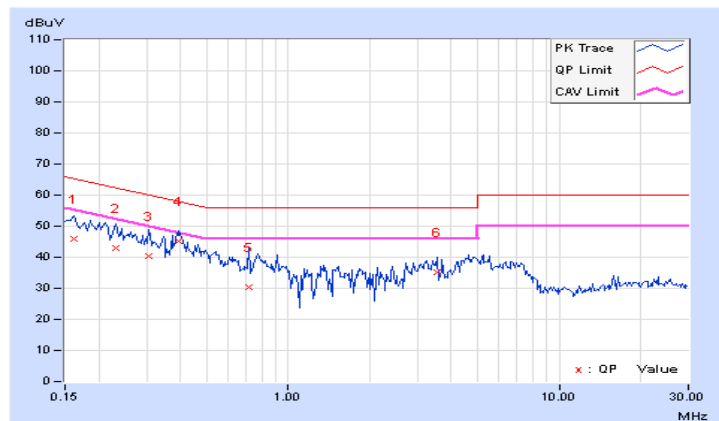


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| Phase Of Power : Neutral (N) | | | | | | | | | | |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15391 | 10.07 | 35.83 | 24.74 | 45.90 | 34.81 | 65.79 | 55.79 | -19.89 | -20.98 |
| 2 | 0.17344 | 10.06 | 34.76 | 23.29 | 44.82 | 33.35 | 64.79 | 54.79 | -19.97 | -21.44 |
| 3 | 0.20078 | 10.04 | 33.92 | 20.74 | 43.96 | 30.78 | 63.58 | 53.58 | -19.62 | -22.80 |
| 4 | 0.25938 | 10.06 | 30.29 | 18.33 | 40.35 | 28.39 | 61.45 | 51.45 | -21.10 | -23.06 |
| 5 | 0.28281 | 10.07 | 29.30 | 16.51 | 39.37 | 26.58 | 60.73 | 50.73 | -21.36 | -24.15 |
| 6 | 0.31016 | 10.08 | 28.91 | 14.24 | 38.99 | 24.32 | 59.97 | 49.97 | -20.98 | -25.65 |
| 7 | 0.39219 | 10.12 | 30.81 | 21.84 | 40.93 | 31.96 | 58.02 | 48.02 | -17.09 | -16.06 |
| 8 | 0.52891 | 10.12 | 22.43 | 10.55 | 32.55 | 20.67 | 56.00 | 46.00 | -23.45 | -25.33 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

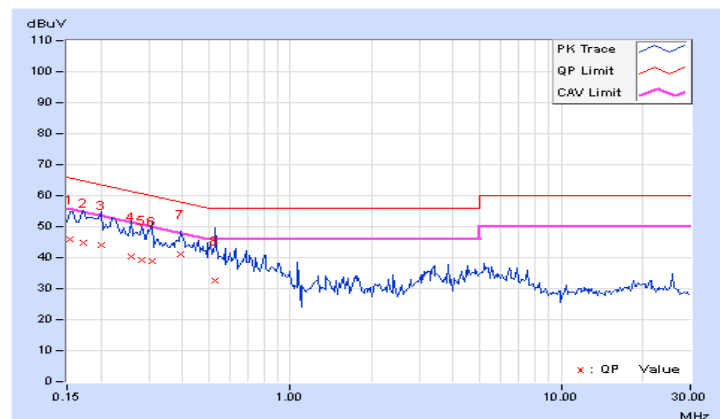


4.2.8 Test Results (Mode 2)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| Phase Of Power : Line (L) | | | | | | | | | | |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBUV) | | Emission Level (dBUV) | | Limit (dBUV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15391 | 10.08 | 41.83 | 29.68 | 51.91 | 39.76 | 65.79 | 55.79 | -13.88 | -16.03 |
| 2 | 0.26719 | 10.09 | 31.13 | 21.91 | 41.22 | 32.00 | 61.20 | 51.20 | -19.98 | -19.20 |
| 3 | 0.29063 | 10.09 | 30.66 | 19.74 | 40.75 | 29.83 | 60.51 | 50.51 | -19.76 | -20.68 |
| 4 | 0.46641 | 10.13 | 34.68 | 29.45 | 44.81 | 39.58 | 56.58 | 46.58 | -11.77 | -7.00 |
| 5 | 3.73828 | 10.34 | 22.10 | 14.65 | 32.44 | 24.99 | 56.00 | 46.00 | -23.56 | -21.01 |
| 6 | 21.16797 | 11.61 | 23.86 | 19.52 | 35.47 | 31.13 | 60.00 | 50.00 | -24.53 | -18.87 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

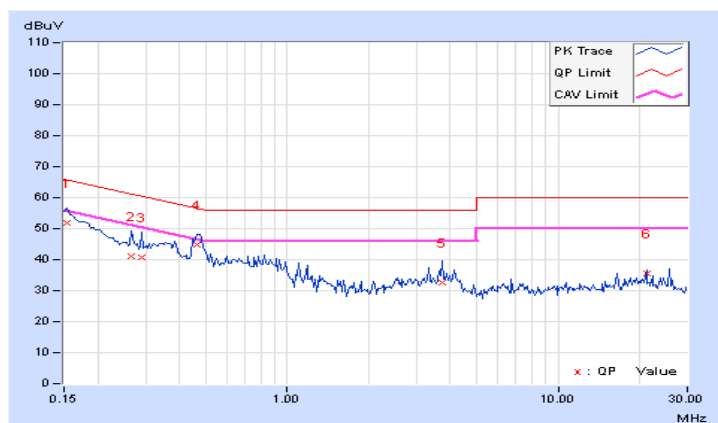


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| Phase Of Power : Neutral (N) | | | | | | | | | | |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15391 | 10.07 | 41.06 | 29.16 | 51.13 | 39.23 | 65.79 | 55.79 | -14.66 | -16.56 |
| 2 | 0.18125 | 10.05 | 37.56 | 24.66 | 47.61 | 34.71 | 64.43 | 54.43 | -16.82 | -19.72 |
| 3 | 0.36094 | 10.10 | 29.39 | 14.23 | 39.49 | 24.33 | 58.71 | 48.71 | -19.22 | -24.38 |
| 4 | 0.45078 | 10.12 | 26.88 | 17.15 | 37.00 | 27.27 | 56.86 | 46.86 | -19.86 | -19.59 |
| 5 | 0.47813 | 10.12 | 31.16 | 20.45 | 41.28 | 30.57 | 56.37 | 46.37 | -15.09 | -15.80 |
| 6 | 3.79297 | 10.25 | 20.86 | 10.16 | 31.11 | 20.41 | 56.00 | 46.00 | -24.89 | -25.59 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

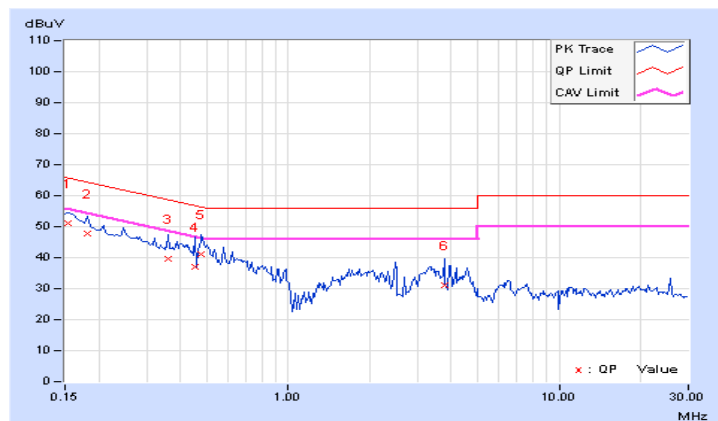


4.2.9 Test Results (Mode 3)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| Phase Of Power : Line (L) | | | | | | | | | | |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBUV) | | Emission Level (dBUV) | | Limit (dBUV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15000 | 10.09 | 40.31 | 25.27 | 50.40 | 35.36 | 66.00 | 56.00 | -15.60 | -20.64 |
| 2 | 0.16562 | 10.08 | 37.94 | 13.80 | 48.02 | 23.88 | 65.18 | 55.18 | -17.16 | -31.30 |
| 3 | 0.18516 | 10.07 | 40.47 | 28.64 | 50.54 | 38.71 | 64.25 | 54.25 | -13.71 | -15.54 |
| 4 | 0.21641 | 10.07 | 27.78 | 9.70 | 37.85 | 19.77 | 62.96 | 52.96 | -25.11 | -33.19 |
| 5 | 0.38047 | 10.12 | 31.18 | 25.68 | 41.30 | 35.80 | 58.27 | 48.27 | -16.97 | -12.47 |
| 6 | 8.14453 | 10.66 | 24.21 | 16.74 | 34.87 | 27.40 | 60.00 | 50.00 | -25.13 | -22.60 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

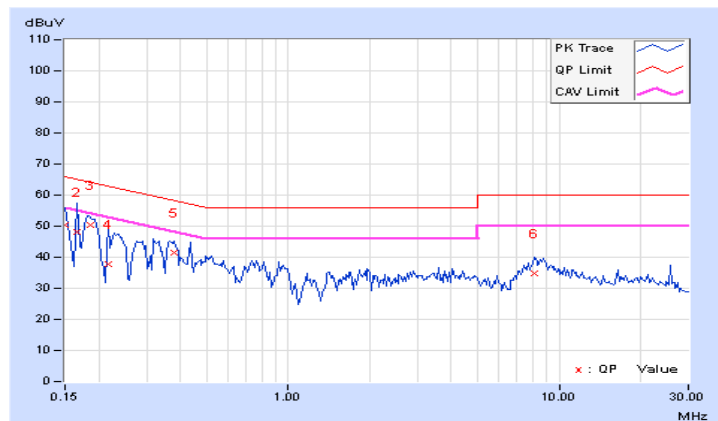


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| Phase Of Power : Neutral (N) | | | | | | | | | | |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15000 | 10.08 | 40.20 | 25.69 | 50.28 | 35.77 | 66.00 | 56.00 | -15.72 | -20.23 |
| 2 | 0.16953 | 10.06 | 37.20 | 14.14 | 47.26 | 24.20 | 64.98 | 54.98 | -17.72 | -30.78 |
| 3 | 0.18516 | 10.05 | 40.47 | 29.28 | 50.52 | 39.33 | 64.25 | 54.25 | -13.73 | -14.92 |
| 4 | 0.22031 | 10.05 | 30.64 | 13.05 | 40.69 | 23.10 | 62.81 | 52.81 | -22.12 | -29.71 |
| 5 | 0.36484 | 10.11 | 31.03 | 23.20 | 41.14 | 33.31 | 58.62 | 48.62 | -17.48 | -15.31 |
| 6 | 8.40234 | 10.59 | 22.43 | 16.15 | 33.02 | 26.74 | 60.00 | 50.00 | -26.98 | -23.26 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

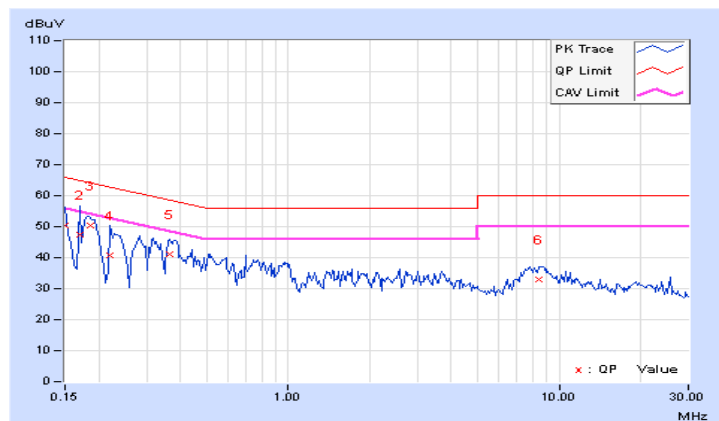


4.2.10 Test Results (Mode 4)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| Phase Of Power : Line (L) | | | | | | | | | | |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.49862 | 10.13 | 41.06 | 32.86 | 51.19 | 42.99 | 56.02 | 46.02 | -4.83 | -3.03 |
| 2 | 0.99766 | 10.17 | 33.02 | 21.72 | 43.19 | 31.89 | 56.00 | 46.00 | -12.81 | -14.11 |
| 3 | 1.33984 | 10.17 | 30.52 | 19.88 | 40.69 | 30.05 | 56.00 | 46.00 | -15.31 | -15.95 |
| 4 | 1.57031 | 10.17 | 30.32 | 20.41 | 40.49 | 30.58 | 56.00 | 46.00 | -15.51 | -15.42 |
| 5 | 8.85156 | 10.71 | 29.10 | 19.46 | 39.81 | 30.17 | 60.00 | 50.00 | -20.19 | -19.83 |
| 6 | 21.16775 | 11.61 | 33.26 | 24.72 | 44.87 | 36.33 | 60.00 | 50.00 | -15.13 | -13.67 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

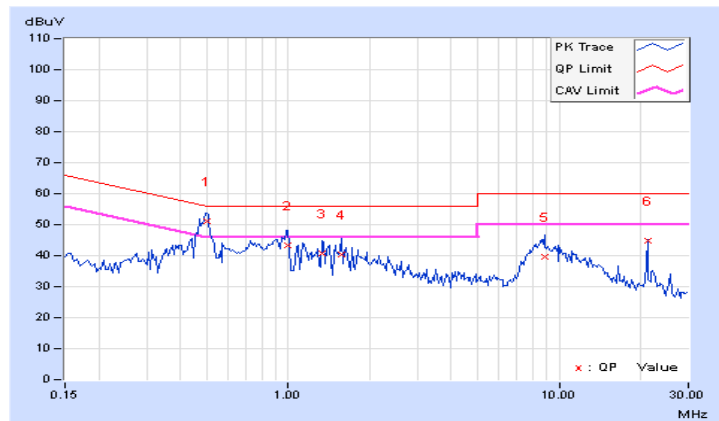


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| Phase Of Power : Neutral (N) | | | | | | | | | | |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15391 | 10.07 | 26.94 | 18.28 | 37.01 | 28.35 | 65.79 | 55.79 | -28.78 | -27.44 |
| 2 | 0.49494 | 10.12 | 38.73 | 27.51 | 48.85 | 37.63 | 56.08 | 46.08 | -7.23 | -8.45 |
| 3 | 0.56016 | 10.12 | 23.99 | 11.19 | 34.11 | 21.31 | 56.00 | 46.00 | -21.89 | -24.69 |
| 4 | 0.90000 | 10.13 | 26.72 | 14.13 | 36.85 | 24.26 | 56.00 | 46.00 | -19.15 | -21.74 |
| 5 | 8.85938 | 10.62 | 28.06 | 17.28 | 38.68 | 27.90 | 60.00 | 50.00 | -21.32 | -22.10 |
| 6 | 21.16969 | 11.29 | 35.28 | 24.39 | 46.57 | 35.68 | 60.00 | 50.00 | -13.43 | -14.32 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

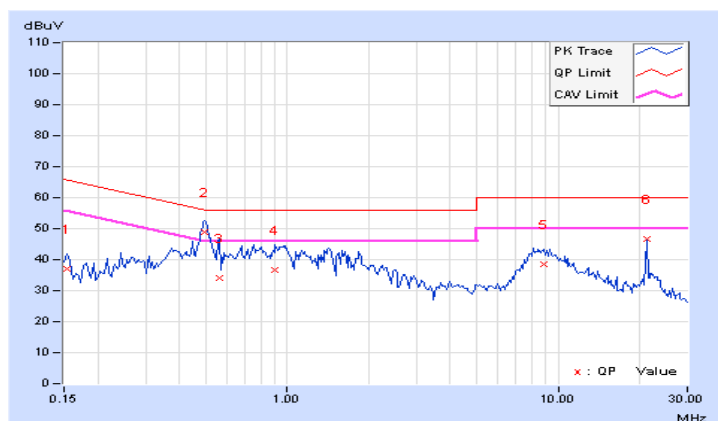


4.3 Conducted Out of Band Emission Measurement

4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 Test Setup

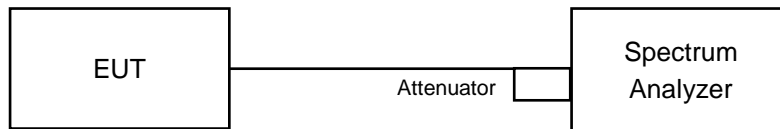

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

2.4GHz_802.11b CH1+5GHz_802.11ac (VHT20) CH165

Chain 0

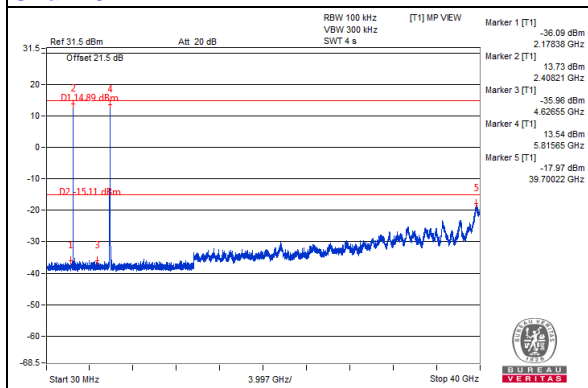

Chain 1

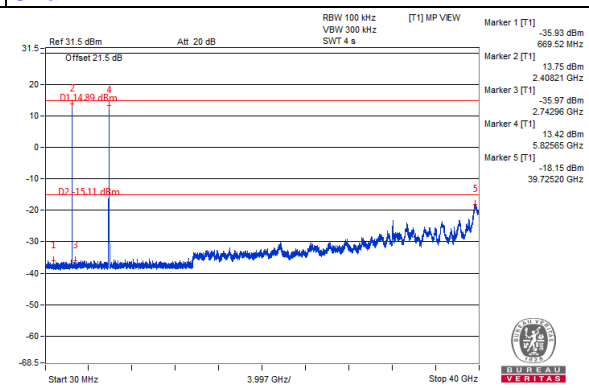

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---