



# TEST REPORT

Applicant Name : Shenzhen Mictrack Electronics Co.,Ltd.  
Address : 706,United Building, Donghuan 1st Road, Longhua District,  
Shenzhen, China  
Report Number: SZ4220615-26461E-EM  
FCC ID: 2A7CE-MT700

## Test Standard (s)

FCC Rules and Regulations Part 15 Subpart B Class B

## Sample Description

Product: Asset GPS Tracker  
Trade Mark: N/A  
Tested Model: MT700  
Multiple Model: MT700-N, MT700-W, MT700-NW  
Date Received: 2022-06-15  
Date of Test: 2022-06-23 to 2022-06-30  
Report Date: 2022-07-04

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Edgar.Wang*

Edgar.Wang  
EMC Engineer

## Approved By:

*Robert Li*

Robert Li  
EMC Engineer

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "\*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>1. TEST RESULTS SUMMARY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION.....</b>	<b>5</b>
2.1. Description of Device (EUT).....	5
2.2. Test Mode .....	5
2.3. Accessory and Auxiliary Equipment.....	6
2.4. Description of Test Facility.....	6
2.5. Measurement Uncertainty.....	6
<b>3. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>7</b>
3.1. For Conducted Emission Test.....	7
3.2. For Radiated Emission Measurement.....	7
<b>4. POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. Power Line Conducted Emission Measurement Limits (Class B) .....	9
4.3. Manufacturer.....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	9
4.6. Power Line Conducted Emission Measurement Results.....	10
<b>5. RADIATED EMISSION MEASUREMENT .....</b>	<b>13</b>
5.1. Block Diagram of Test Setup.....	13
5.2. Radiated Emission Limit (Class B) .....	14
5.3. Manufacturer.....	14
5.4. Operating Condition of EUT .....	14
5.5. Test Procedure .....	15
5.6. Radiated Emission Measurement Result .....	15
<b>6. PHOTOGRAPHS .....</b>	<b>20</b>
6.1. Photo of Conducted Emission Measurement .....	20
6.2. Photo of Radiation Emission Measurement.....	21
6.3. Photo of EUT .....	22

## Test Report Declaration

Applicant : Shenzhen Mictrack Electronics Co.,Ltd.  
Manufacturer : Shenzhen Mictrack Electronics Co.,Ltd.  
Product : Asset GPS Tracker  
Model No. : MT700  
Multiple Model : MT700-N, MT700-W, MT700-NW

Measurement Procedure Used:

### **FCC Rules and Regulations Part 15 Subpart B Class B ANSI C63.4-2014**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

## 1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission	FCC Part 15 Subpart B, Section 15.107	Pass
Radiated Emission	FCC Part 15 Subpart B, Section 15.109	Pass

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product	: Asset GPS Tracker
Model No.	: MT700
Multiple Model	: MT700-N, MT700-W, MT700-NW
Rating	: DC 5V
Remark(s)	: The EUT's highest operating frequency is 2462 MHz, the radiated emission measurement shall be made up to 13GHz.
Applicant	: Shenzhen Mictrack Electronics Co.,Ltd.
Address	: 706,United Building, Donghuan 1st Road, Longhua District, Shenzhen, China
Manufacturer	: Shenzhen Mictrack Electronics Co.,Ltd.
Address	: 706,United Building, Donghuan 1st Road, Longhua District, Shenzhen, China
Sample Number	: SZ4220615-26461E-EM-S1

### 2.2. Test Mode

Test Mode 1: Charging + Working

## 2.3. Accessory and Auxiliary Equipment

Adapter : Manufacturer: MEIZU  
Model: UP0830  
Input: 100-240V50/60HZ 0.7A  
Output: 5V or 8V-3A or 12V-2A  
(The DC line length is 100cm.)

## 2.4. Description of Test Facility

Name of Firm : Shenzhen Accurate Technology Co., Ltd.  
Site Location : 1/F., Building A, Changyuan New Material Port, Science &  
Industry Park, Nanshan District, Shenzhen, Guangdong,  
P.R. China

## 2.5. Measurement Uncertainty

Conduction Emission Expanded Uncertainty :  $U=2.72dB, k=2$   
(0.15kHz-30MHz)  
Radiated emission expanded uncertainty :  $U=4.28dB, k=2$   
(30MHz-1000MHz)  
Radiated emission expanded uncertainty :  $U=4.98dB, k=2$   
(1GHz -18GHz)

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1.	Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
2.	Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
3.	Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
4.	Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
5.	Conducted Emission Test Software: e3 19821b (V9)					


#### 3.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1.	Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
2.	Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
3.	SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
4.	A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
5.	Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/11	2022/11/10
6.	Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
7.	Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
8.	Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
9.	Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
10.	Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
11.	Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
12.	Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
13.	Radiated Emission Test Software: e3 19821b (V9)					


## 4. POWER LINE CONDUCTED MEASUREMENT

### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators

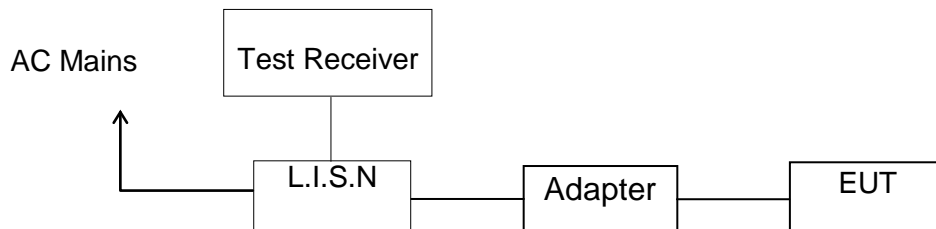

#### 4.1.2. Test System Setup

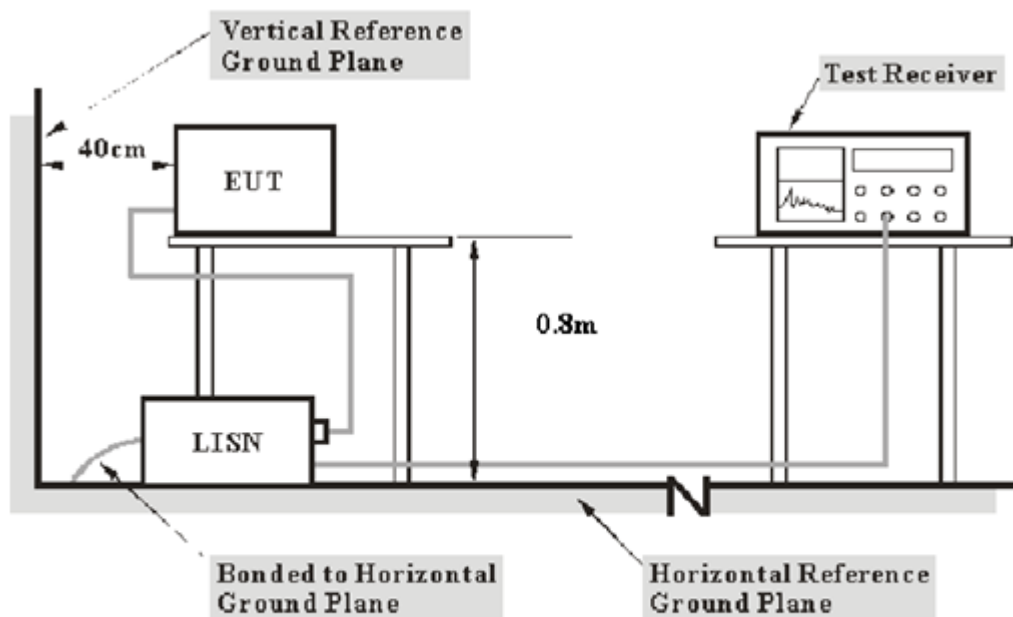

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 10mm from EUT and at the least 80 cm from other units and other metal planes support units.



## 4.2. Power Line Conducted Emission Measurement Limits (Class B)

Frequency (MHz)	Limit dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

## 4.3. Manufacturer

The equipment are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

## 4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in test mode and measure it.

## 4.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9kHz.  
The frequency range from 150kHz to 30MHz is checked.

Over Limit = Level (dB $\mu$ V) - Limit (dB $\mu$ V)

#### 4.6. Power Line Conducted Emission Measurement Results

**PASS.**


The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT. Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.


The spectral diagrams are attached as below.

<b>Job No.:</b>	SZ4220615-26461E-EM	<b>Power:</b>	AC 120V 60Hz
<b>Eut No.:</b>	SZ4220615-26461E-EM -S1	<b>Test By:</b>	Jason Liu
<b>Eut:</b>	Asset GPS Tracker	<b>Test item:</b>	Conduction Test
<b>Model:</b>	MT700	<b>Test standard:</b>	FCC Part 15B
<b>Climatic:</b>	24° C 51%RH	<b>Date:</b>	2022.6.23

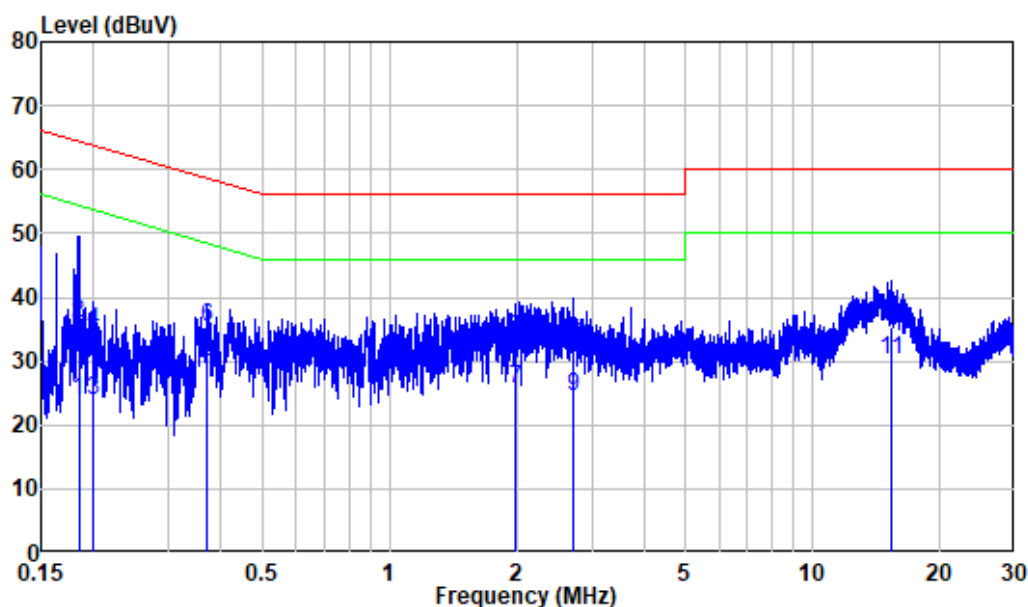

Site : Shielding Room  
 Condition: Line  
 Job No. : SZ4220615-26461E-EM S1  
 Mode : Charging + Working  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.184	9.80	14.09	23.89	54.30	-30.41	Average
2	0.184	9.80	26.12	35.92	64.30	-28.38	QP
3	0.200	9.80	14.07	23.87	53.62	-29.75	Average
4	0.200	9.80	24.99	34.79	63.62	-28.83	QP
5	0.369	9.80	20.02	29.82	48.52	-18.70	Average
6	0.369	9.80	25.46	35.26	58.52	-23.26	QP
7	1.983	9.82	15.70	25.52	46.00	-20.48	Average
8	1.983	9.82	23.78	33.60	56.00	-22.40	QP
9	2.728	9.83	14.57	24.40	46.00	-21.60	Average
10	2.728	9.83	22.59	32.42	56.00	-23.58	QP
11	15.277	9.95	20.14	30.09	50.00	-19.91	Average
12	15.277	9.95	25.49	35.44	60.00	-24.56	QP

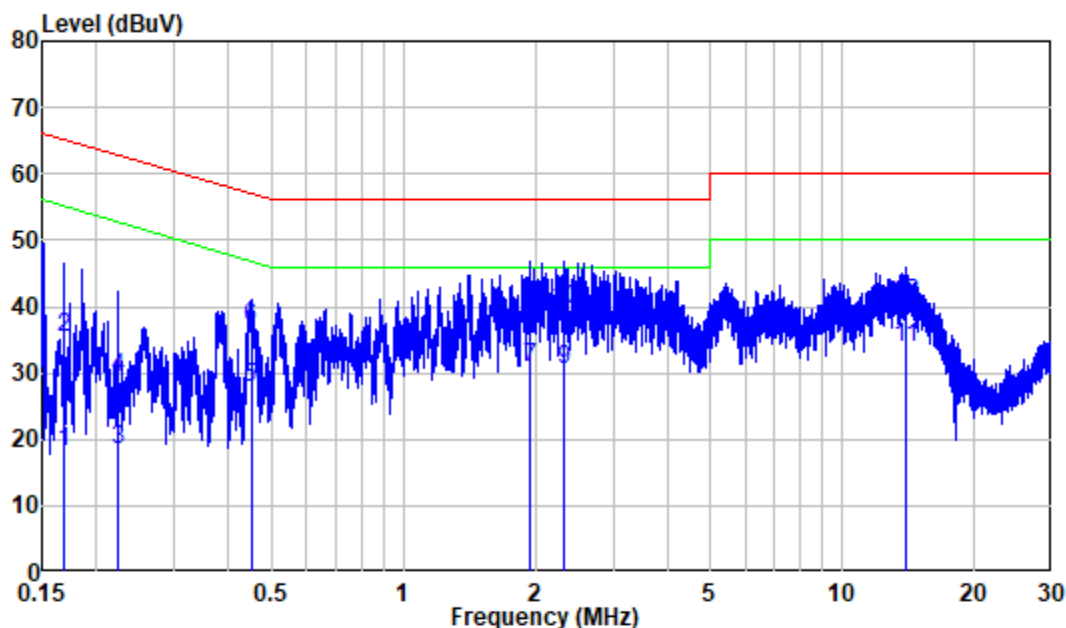


Site : Shielding Room  
 Condition: Neutral  
 Job No. : SZ4220615-26461E-EM S1  
 Mode : Charging + Working  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.168	9.80	8.25	18.05	55.04	-36.99	Average
2	0.168	9.80	25.52	35.32	65.04	-29.72	QP
3	0.223	9.80	8.73	18.53	52.71	-34.18	Average
4	0.223	9.80	19.34	29.14	62.71	-33.57	QP
5	0.449	9.80	18.10	27.90	46.89	-18.99	Average
6	0.449	9.80	27.14	36.94	56.89	-19.95	QP
7	1.941	9.82	20.86	30.68	46.00	-15.32	Average
8	1.941	9.82	30.40	40.22	56.00	-15.78	QP
9	2.323	9.82	20.66	30.48	46.00	-15.52	Average
10	2.323	9.82	29.70	39.52	56.00	-16.48	QP
11	13.887	10.04	23.68	33.72	50.00	-16.28	Average
12	13.887	10.04	30.40	40.44	60.00	-19.56	QP

## 5. RADIATED EMISSION MEASUREMENT


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators

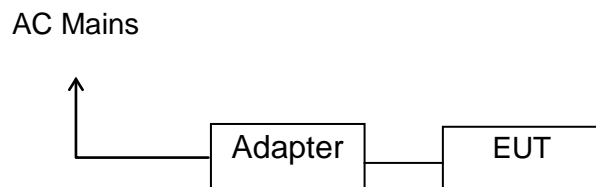


#### 5.1.2. Test System Setup

##### Below 1GHz:

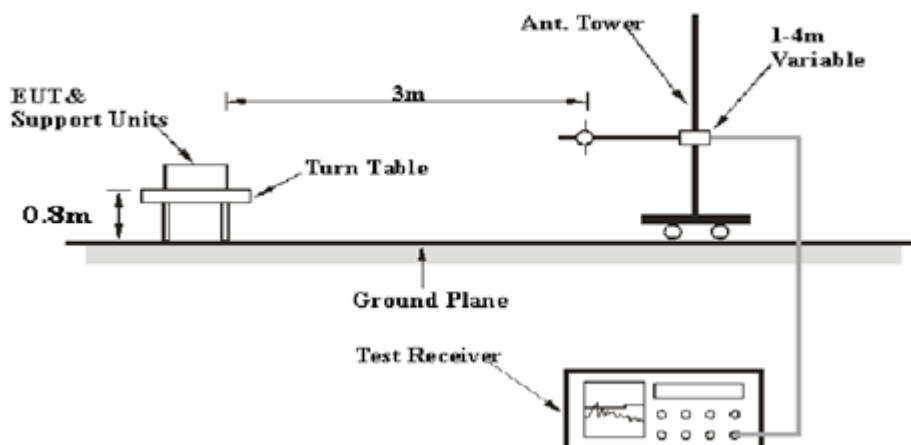

##### Above 1GHz:

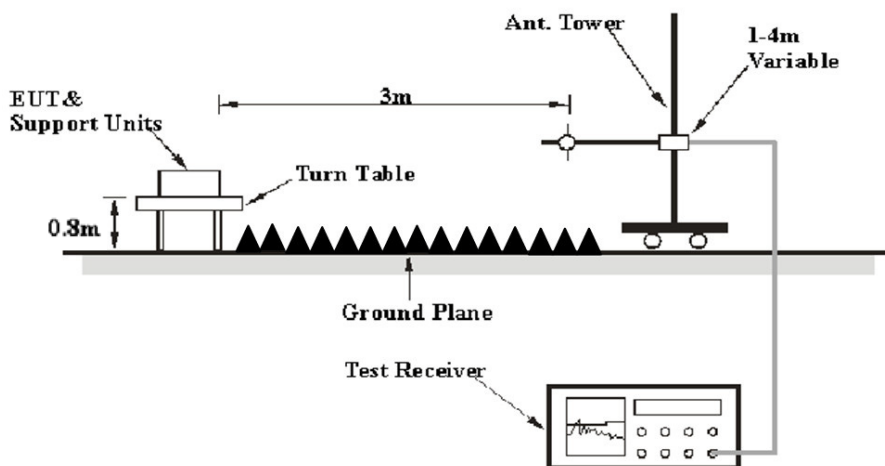

### 5.2.Radiated Emission Limit (Class B)

All emissions from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Frequency MHz	Distance Meters	Field Strengths QP Limit	
		μV/m	dB(μV/m)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

Remark:  
 (1) Emission level dB(μV) = 20 log Emission level μV/m.  
 (2)The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

Frequency MHz	Distance Meters	Field StrengthsLimit	
		Peak dB(μV/m)	AVGdB(μV/m)
1000-13000	3	74	54

### 5.3.Manufacturer

The following equipment are installed on Radiated Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 5.4.Operating Condition of EUT

- 5.4.1.Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2.Turn on the power of all equipment.
- 5.4.3.Let the EUT work in test mode and measure it.

### 5.5. Test Procedure

The EUT and its simulators are placed on a turntable. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2014 on radiated emission measurement.

The bandwidth of the Receiver is set at 9kHz in 9kHz-30MHz, 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 30MHz to 13GHz is investigated.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705–108 .....	1000.
108–500 .....	2000.
500–1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Over Limit (dB) = Level(dB $\mu$ v/m) - Limit (dB $\mu$ v/m)

QP = Quasi-peak Reading

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

### 5.6. Radiated Emission Measurement Result

**PASS.**


The frequency range from 30MHz to 13GHz is investigated.

The spectral diagrams are attached as below.

Over Limit = Level (dB $\mu$ V) - Limit (dB $\mu$ V)

Job No.:	SZ4220615-26461E-EM	Power:	120V 60Hz
EUT No.:	SZ4220615-26461E-EM-S1	Test By:	Level Li
EUT:	Asset GPS Tracker	Test item:	Radiation Emission
Model:	MT700	Temp.(°C)/Hum.(%):	26° C 58%RH
Test standard:	FCC PART 15B	Date:	2022.6.30


**Below 1GHz:**

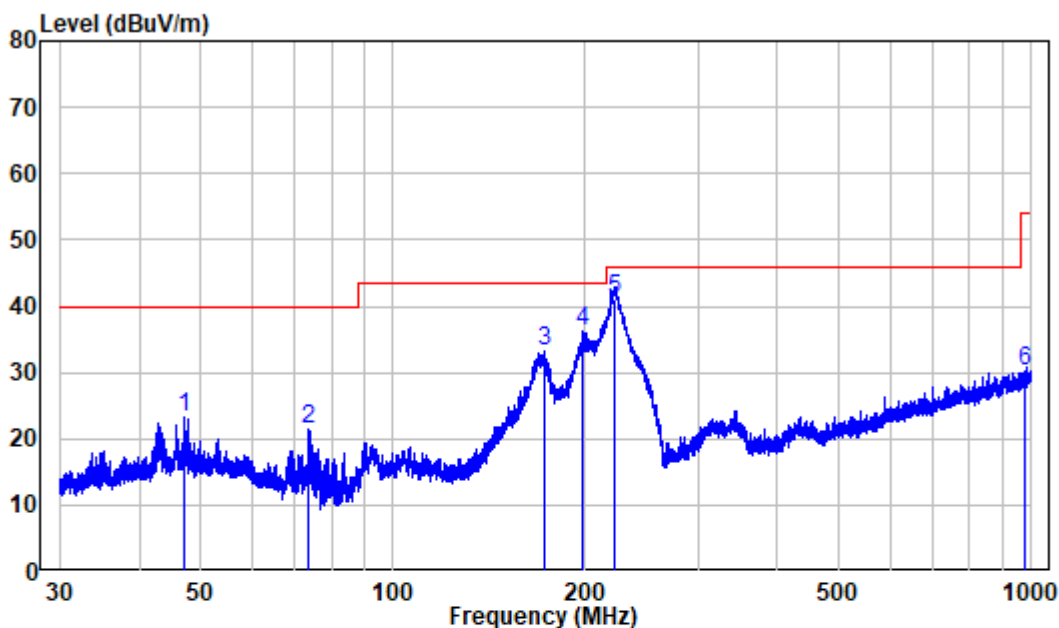

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZ4220615-26461E-EM  
 Test Mode: Charging+working

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.057	-10.00	33.17	23.17	40.00	-16.83	Peak
2	73.585	-15.98	37.48	21.50	40.00	-18.50	Peak
3	172.599	-13.31	46.54	33.23	43.50	-10.27	Peak
4	197.546	-11.55	47.70	36.15	43.50	-7.35	Peak
5	221.683	-11.36	52.31	40.95	46.00	-5.05	QP
6	980.039	2.41	27.80	30.21	54.00	-23.79	Peak




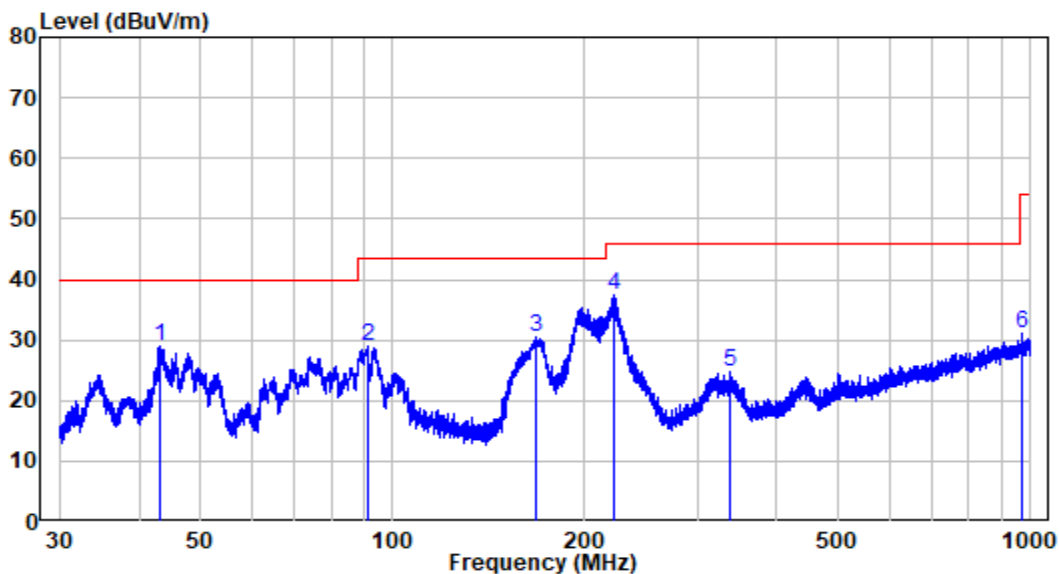

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZ4220615-26461E-EM  
 Test Mode: Charging+working


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	43.013	-9.96	38.87	28.91	40.00	-11.09	Peak
2	91.295	-13.56	42.47	28.91	43.50	-14.59	Peak
3	167.310	-13.86	44.48	30.62	43.50	-12.88	Peak
4	221.683	-11.36	48.93	37.57	46.00	-8.43	Peak
5	338.252	-7.49	32.11	24.62	46.00	-21.38	Peak
6	970.209	2.48	28.70	31.18	54.00	-22.82	Peak

**Above 1GHz:**

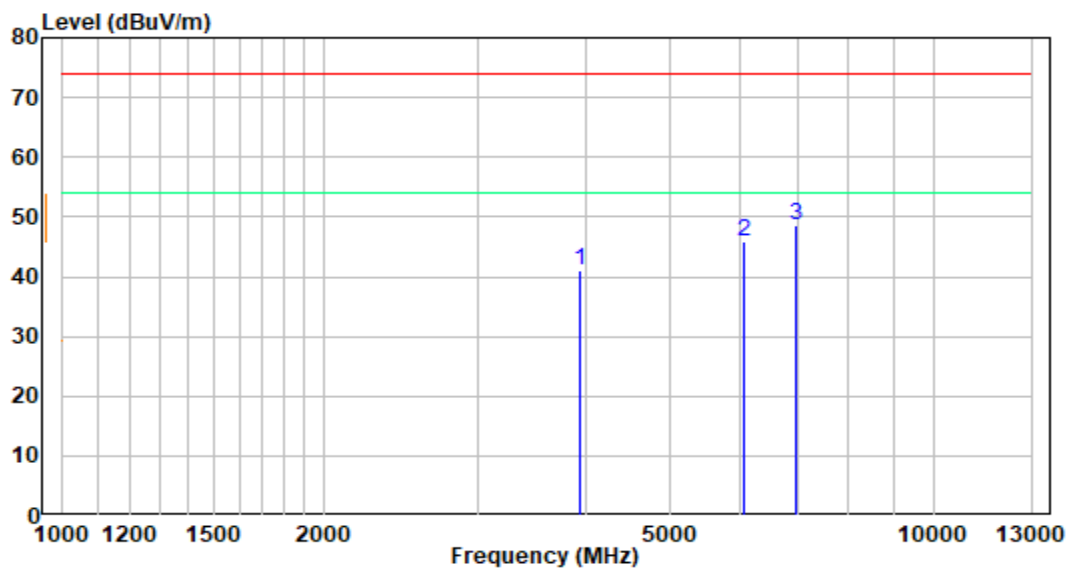

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZ4220615-26461E-EM  
 Test Mode: Charging+working

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3934.000	-5.52	46.64	41.12	74.00	-32.88	Peak
2	6064.000	-1.42	47.37	45.95	74.00	-28.05	Peak
3	6959.500	2.15	46.34	48.49	74.00	-25.51	Peak

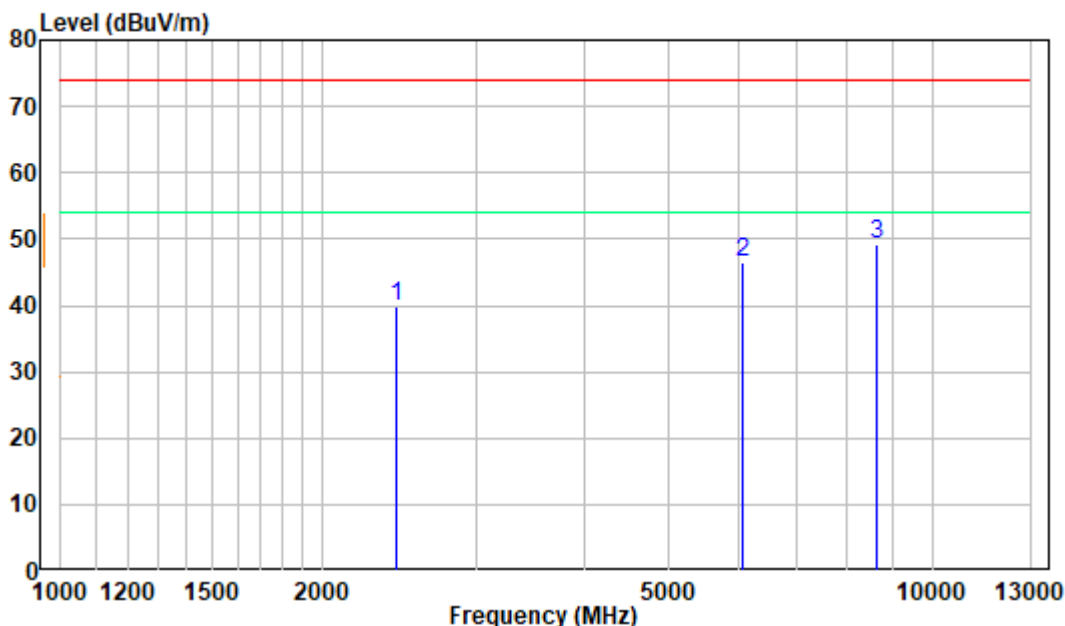

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZ4220615-26461E-EM  
 Test Mode: Charging+working

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2434.000	-7.24	47.24	40.00	74.00	-34.00	Peak
2	6079.000	-1.35	47.74	46.39	74.00	-27.61	Peak
3	8645.500	5.02	44.25	49.27	74.00	-24.73	Peak

Note 1:Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

The other spurious emission which is in the noise floor level was not recorded.

Note 2:For below 1GHz testing,if the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

## 6. PHOTOGRAPHS


### 6.1. Photo of Conducted Emission Measurement

#### Conducted Emissions




## 6.2.Photo of Radiation Emission Measurement



**Below 1GHz:**


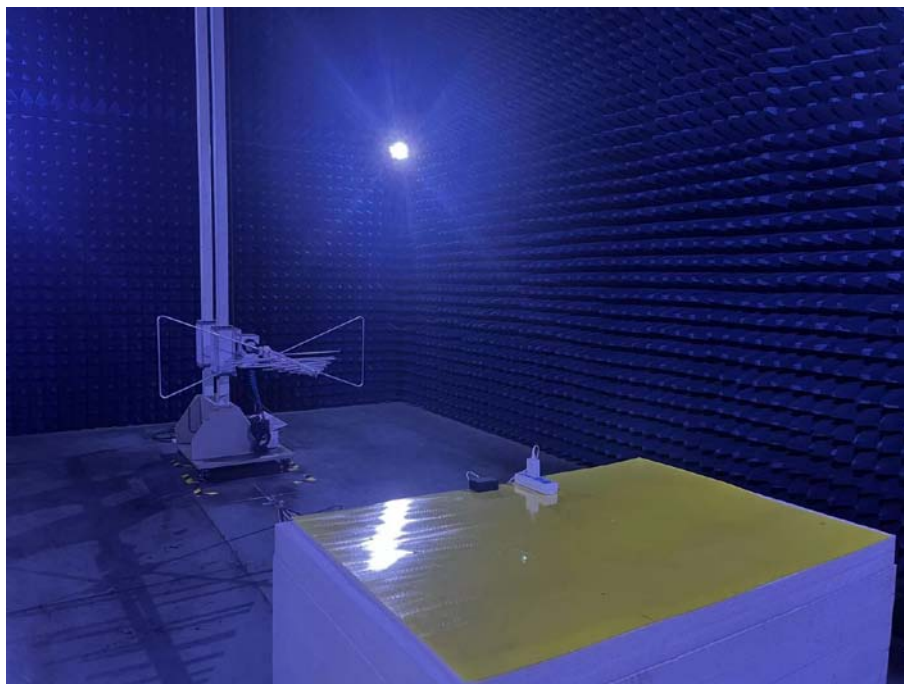




**Above 1GHz:**

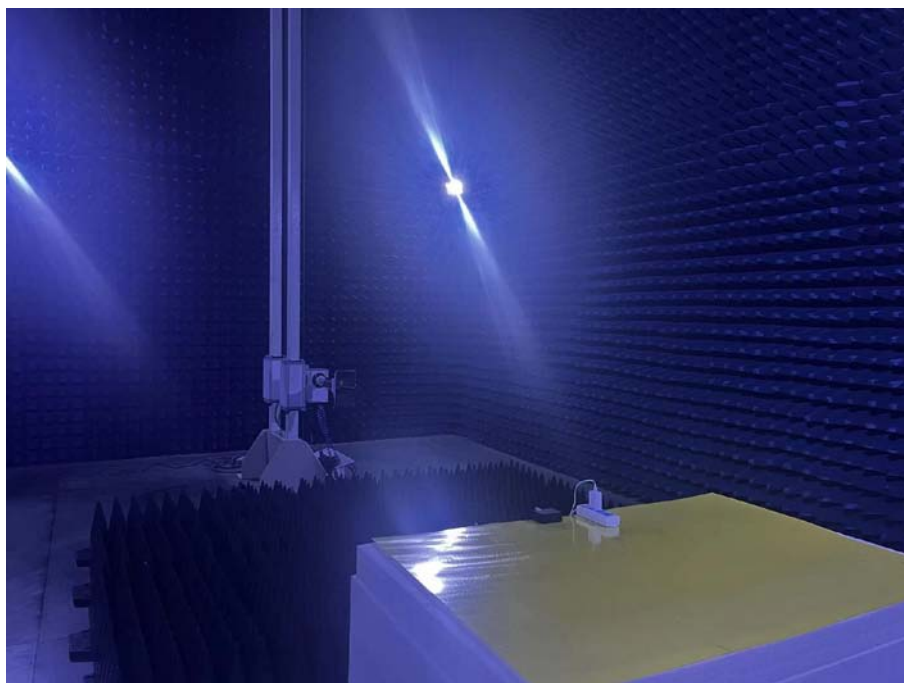


### 6.3.Photo of EUT

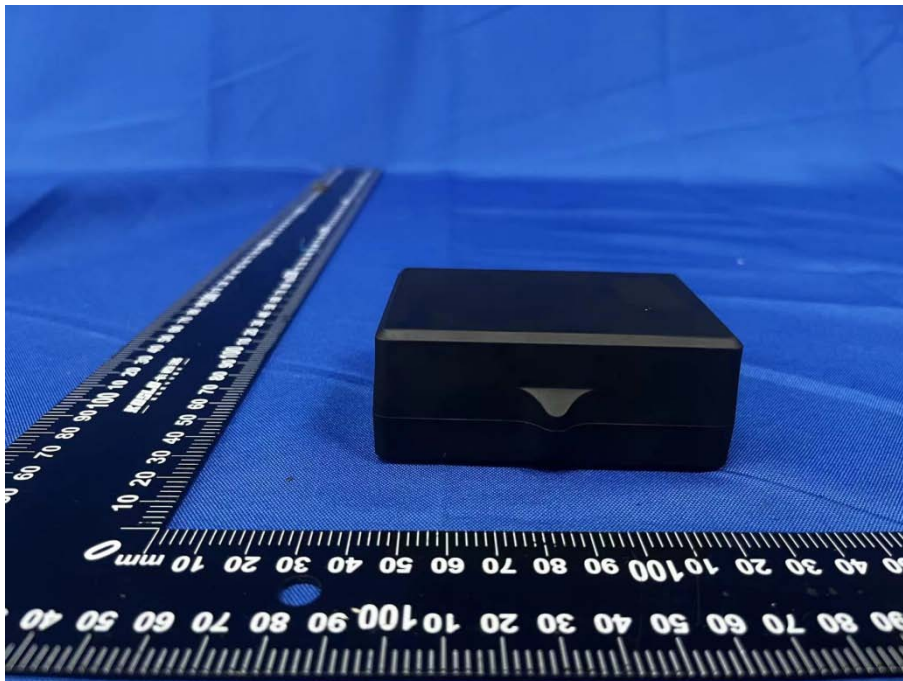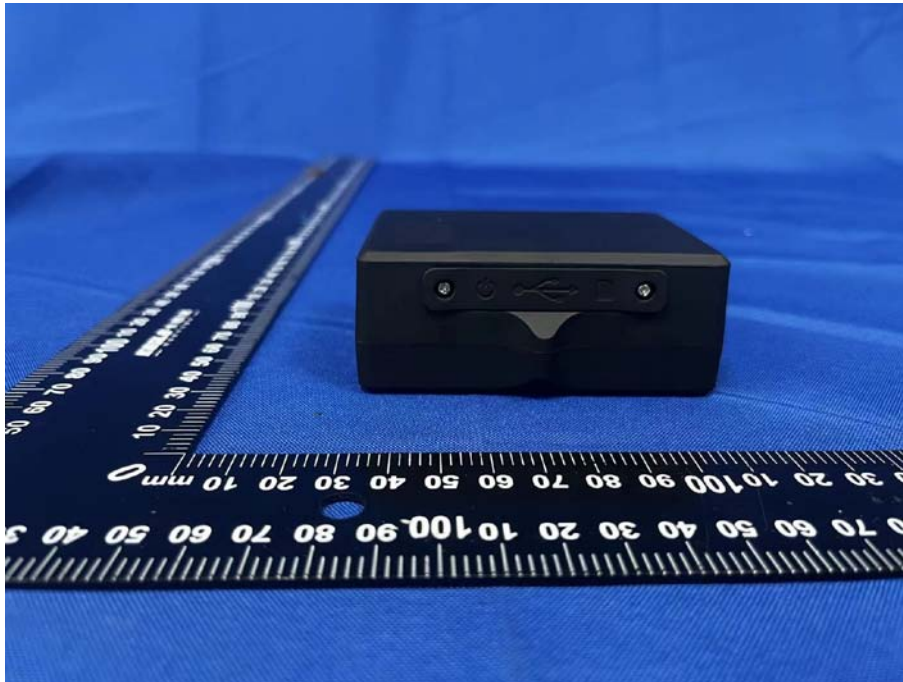


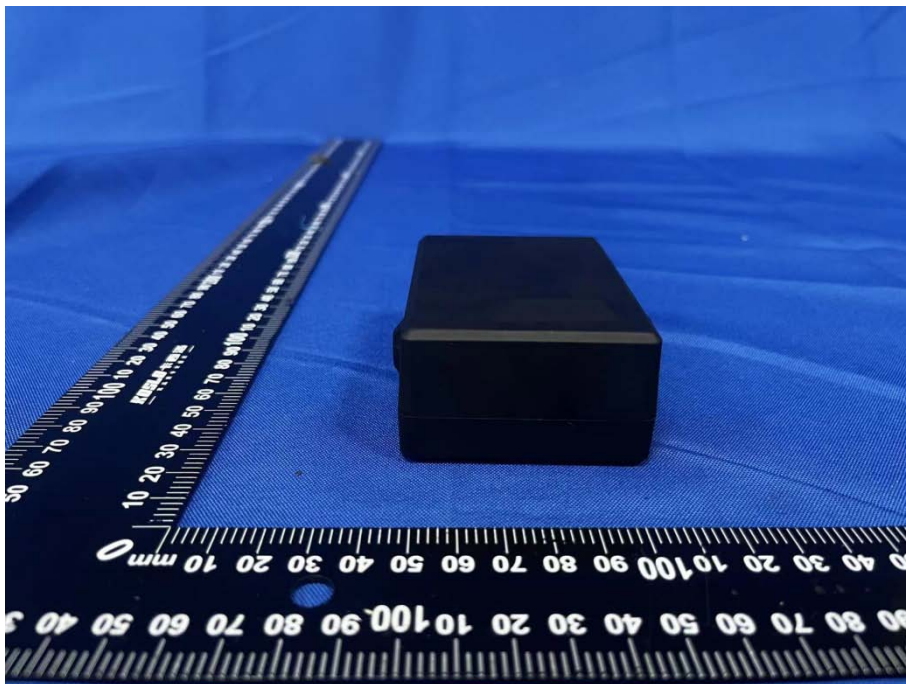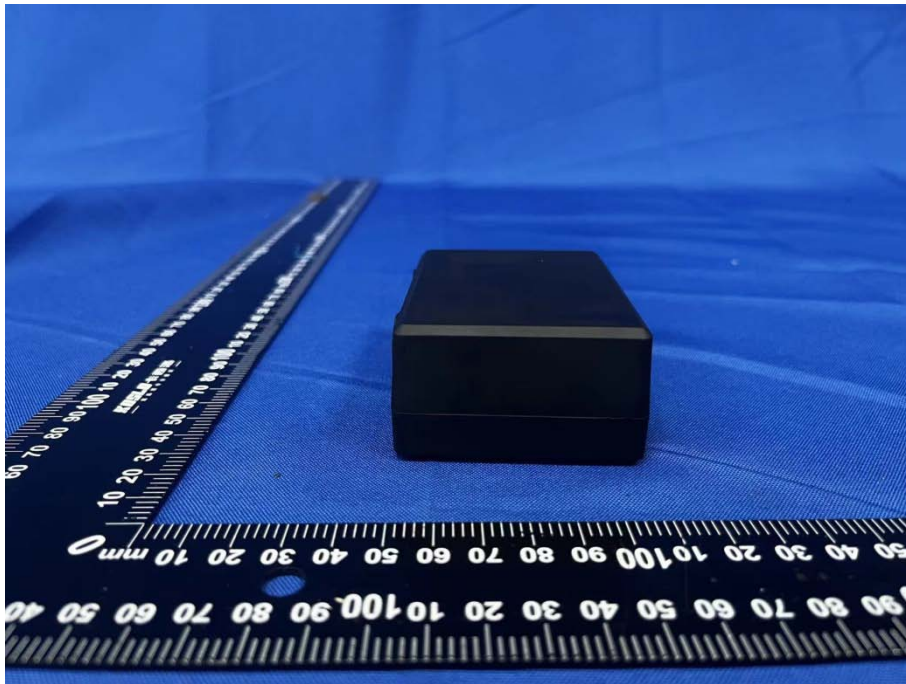


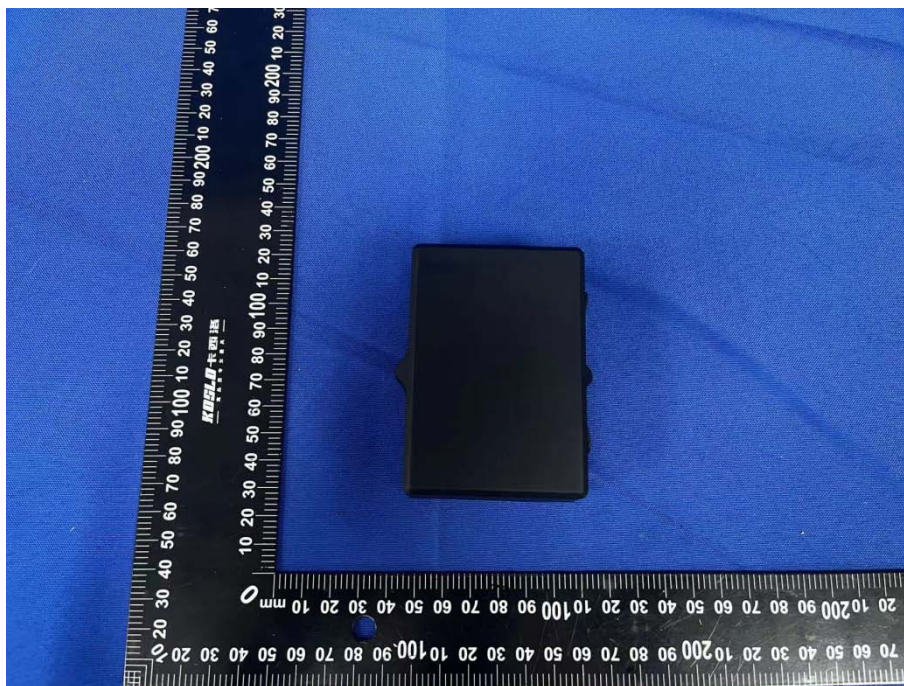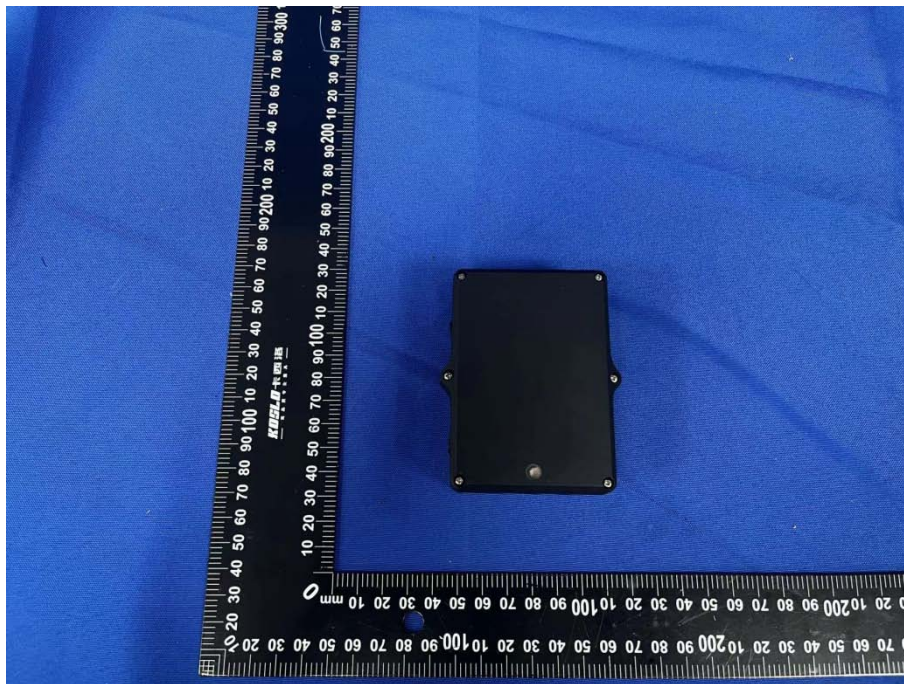





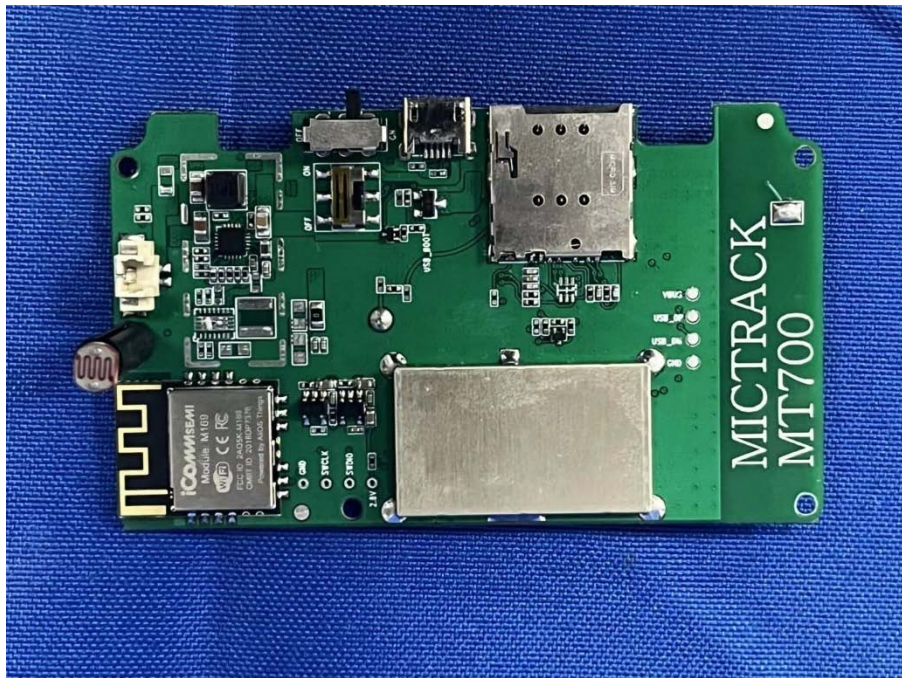

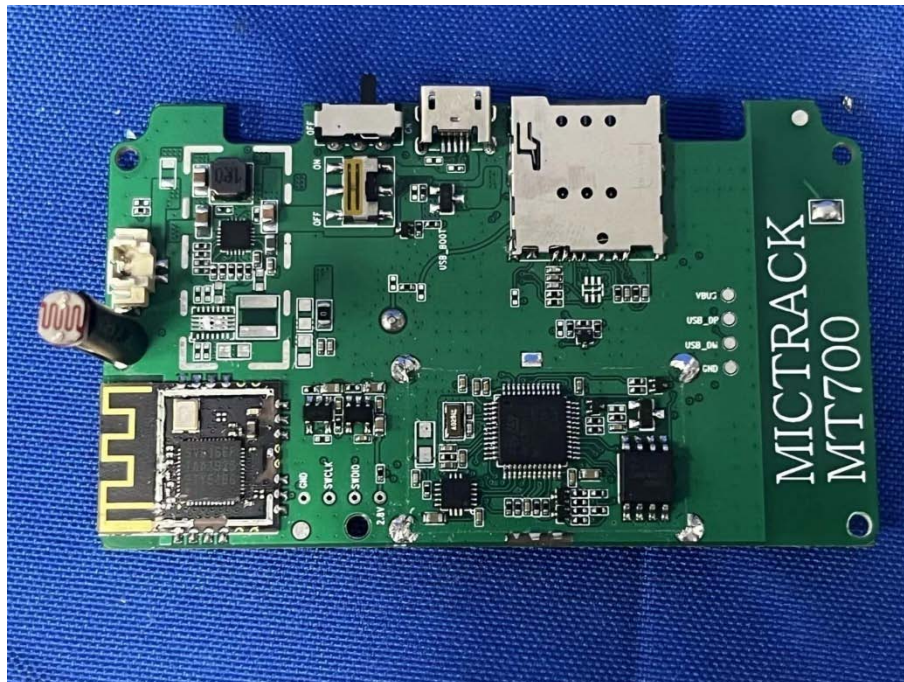

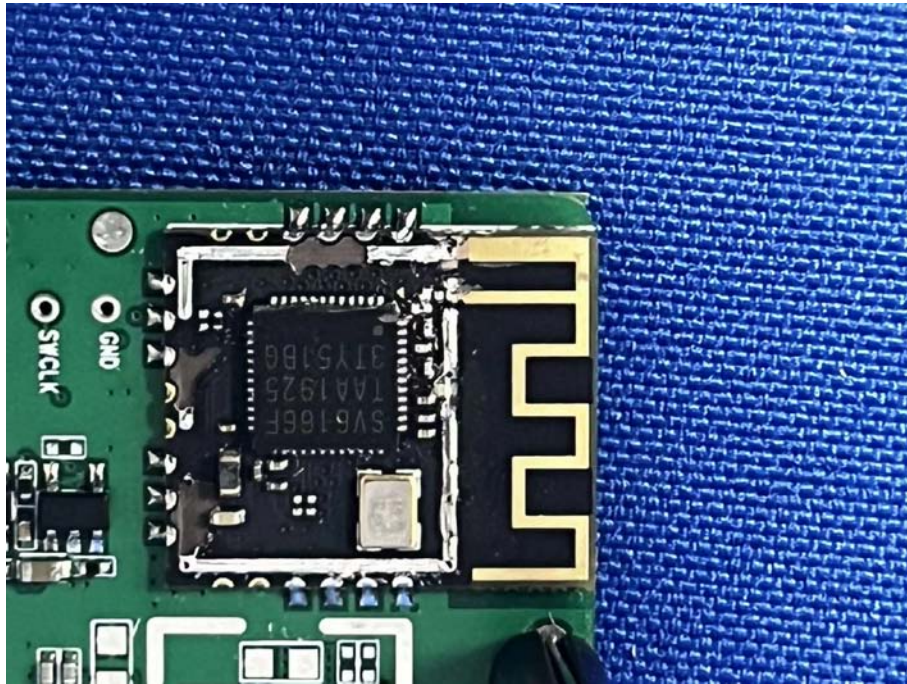



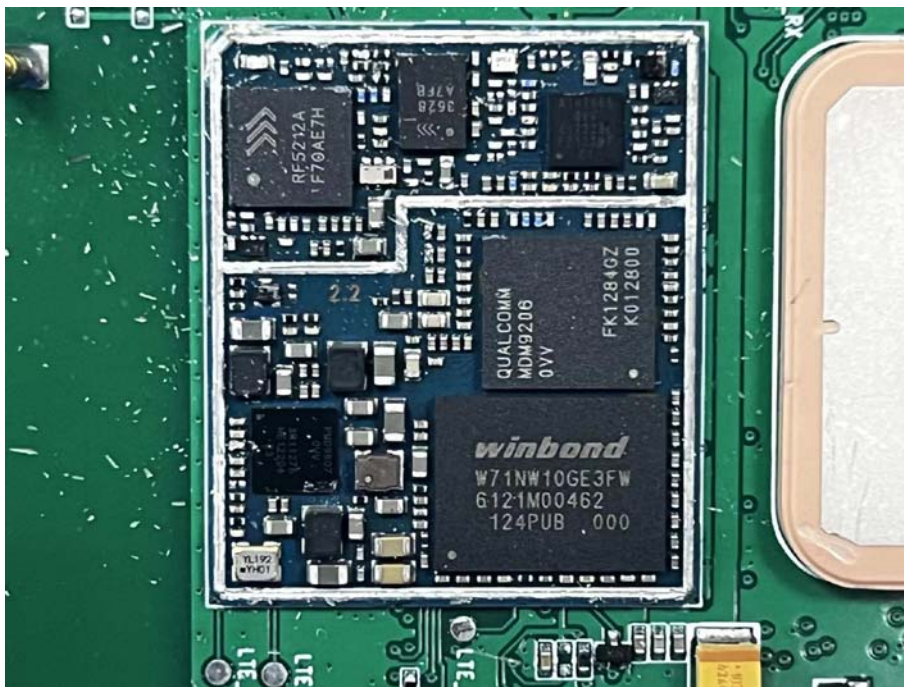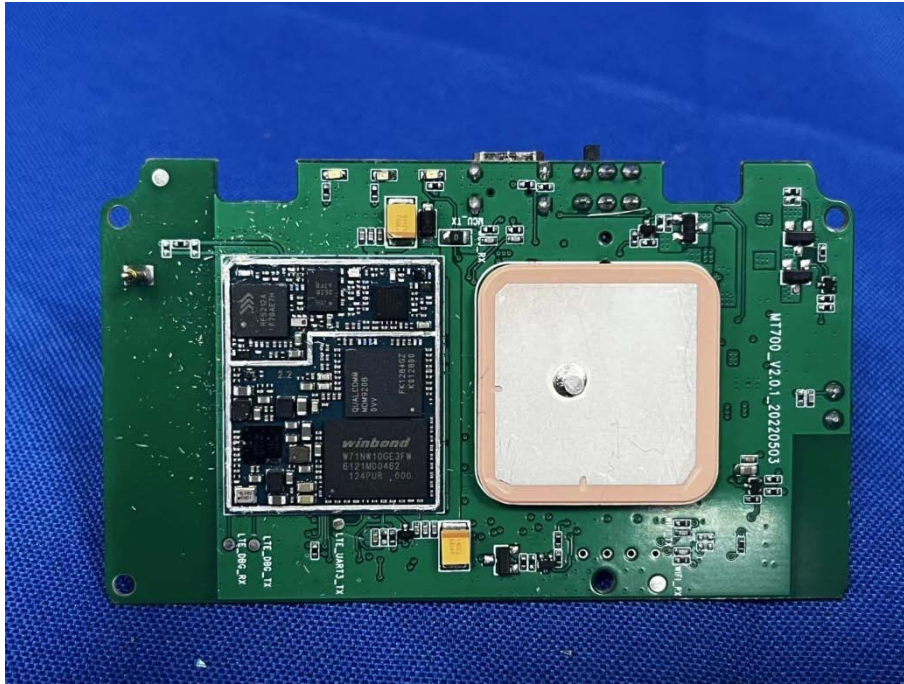



----- THE END OF TEST REPORT -----