

File name: E09932C2.RES
Date: 08. Jul 04 11:58

Scan Settings (3 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp		
150k	1M	5k	9k	QP+AV	1ms	AUTO	LN	OFF	
1M	10M	10k	9k	QP+AV	1ms	AUTO	LN	OFF	
10M	30M	50k	9k	QP+AV	1ms	AUTO	LN	OFF	


Transducer No.	Start	Stop	Name
2	150k	30M	LIMITER

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 30dB

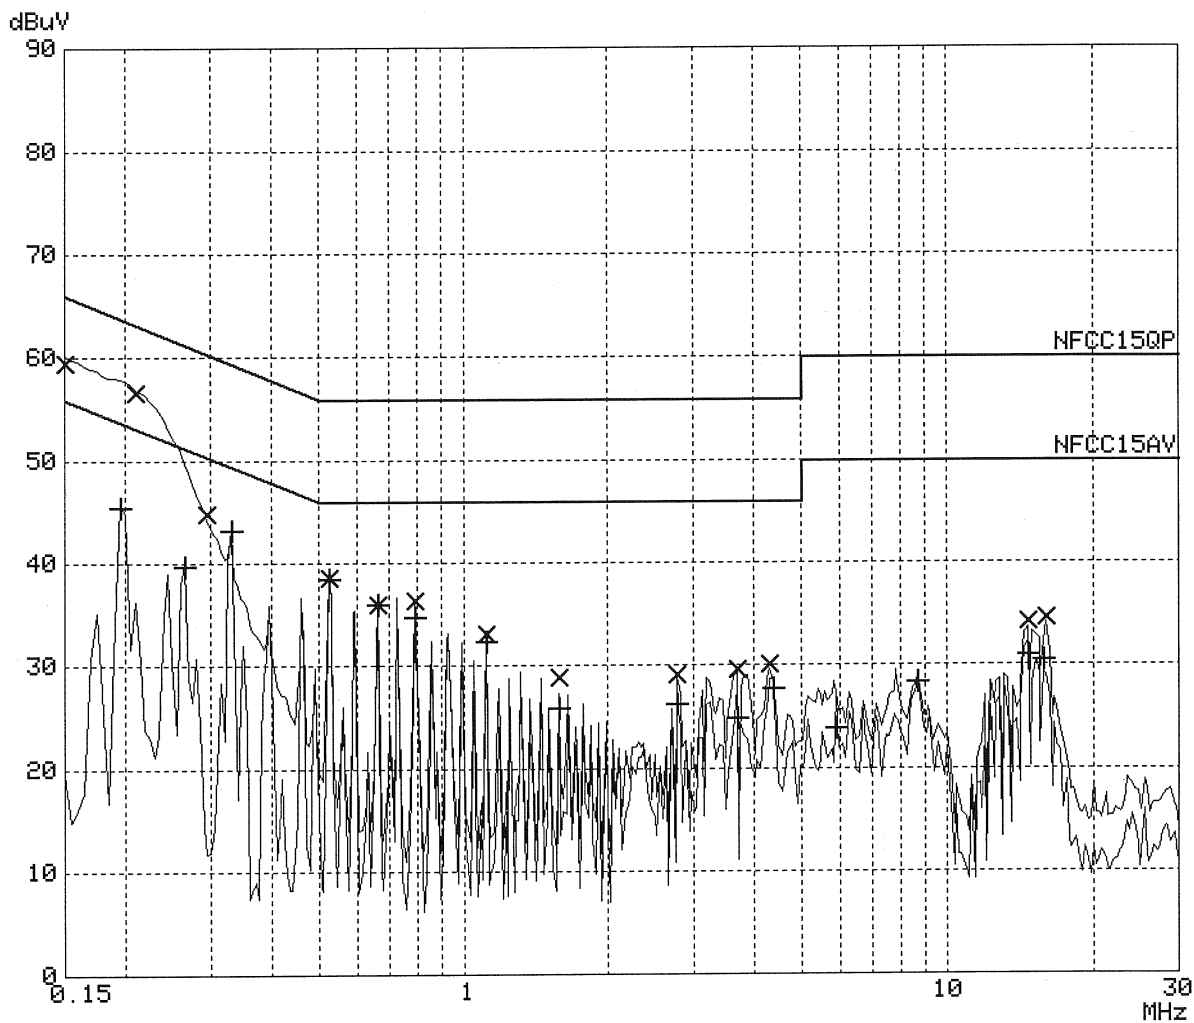

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.15000	59.5	-6.4	L1	fl
0.21000	56.7	-6.5	L1	fl
0.29500	44.9	-15.4	N	fl
0.52500	38.6	-17.3	L1	fl
0.66000	36.0	-19.9	L1	fl
0.79000	36.3	-19.6	N	fl
1.12000	33.2	-22.8	N	fl
1.58000	28.9	-27.0	N	fl
2.77000	29.1	-26.8	L1	fl
3.69000	29.7	-26.2	L1	fl
4.31000	30.1	-25.8	N	fl
14.65000	34.3	-25.6	N	fl
16.00000	34.7	-25.2	N	fl

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.19500	45.4	-8.4	L1	fl
0.26500	39.7	-11.6	L1	fl
0.33000	43.2	-6.2	L1	fl
0.52500	38.5	-7.4	L1	fl
0.66000	36.0	-9.9	L1	fl
0.79000	34.8	-11.1	N	fl
1.12000	32.3	-13.6	L1	fl
1.58000	25.9	-20.0	N	fl
2.77000	26.3	-19.6	L1	fl
3.69000	24.9	-21.0	L1	fl
4.37000	27.8	-18.1	L1	fl
5.91000	23.9	-26.0	L1	fl
8.68000	28.4	-21.5	N	fl
14.65000	31.1	-18.8	N	fl
15.75000	30.5	-19.4	N	fl

* limit exceeded