




Site: WZ-AC1	Time: 2023/12/20 - 23:16
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

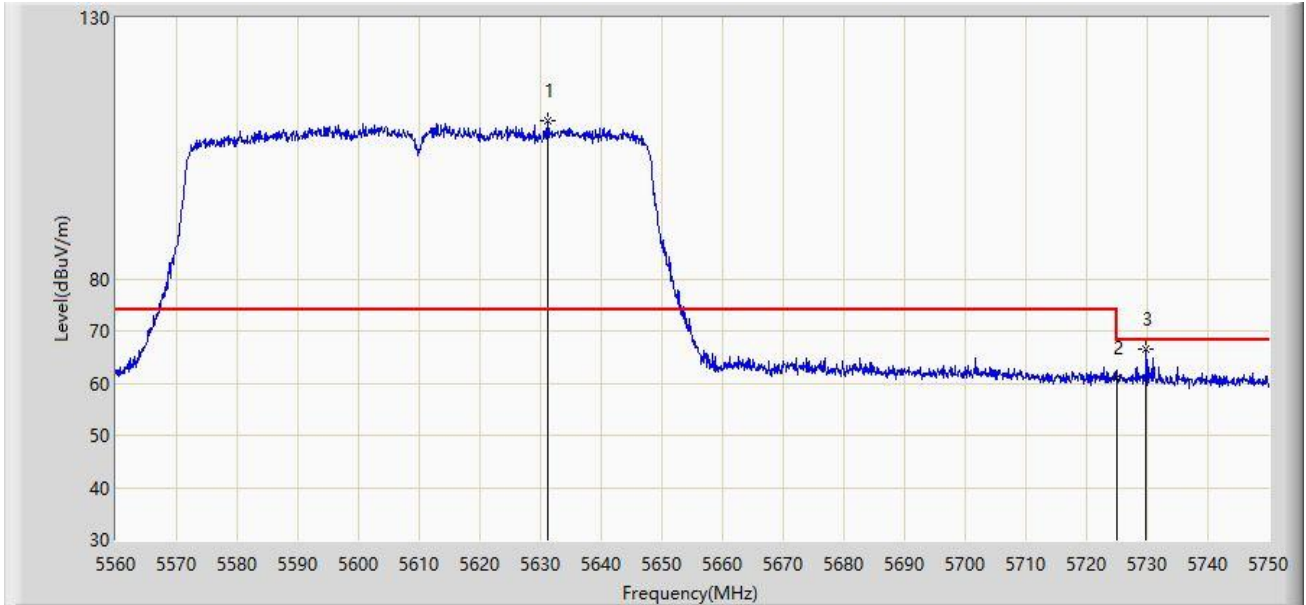

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5631.250	110.185	106.288	N/A	N/A	3.898	PK
2		5725.000	60.984	56.753	-7.216	68.200	4.231	PK
3	*	5729.860	66.645	62.381	-1.555	68.200	4.264	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 03:10
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

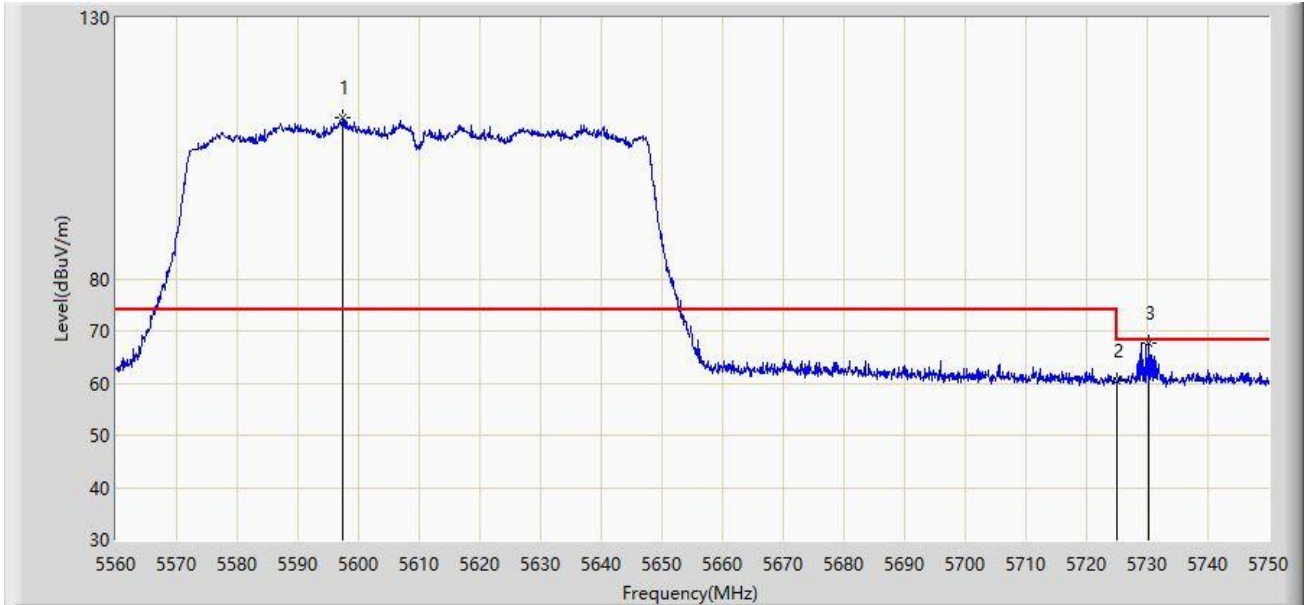

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5597.335	110.850	106.661	N/A	N/A	4.190	PK
2		5725.000	60.465	56.234	-7.735	68.200	4.231	PK
3	*	5730.145	67.606	63.339	-0.594	68.200	4.266	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/20 - 23:43
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

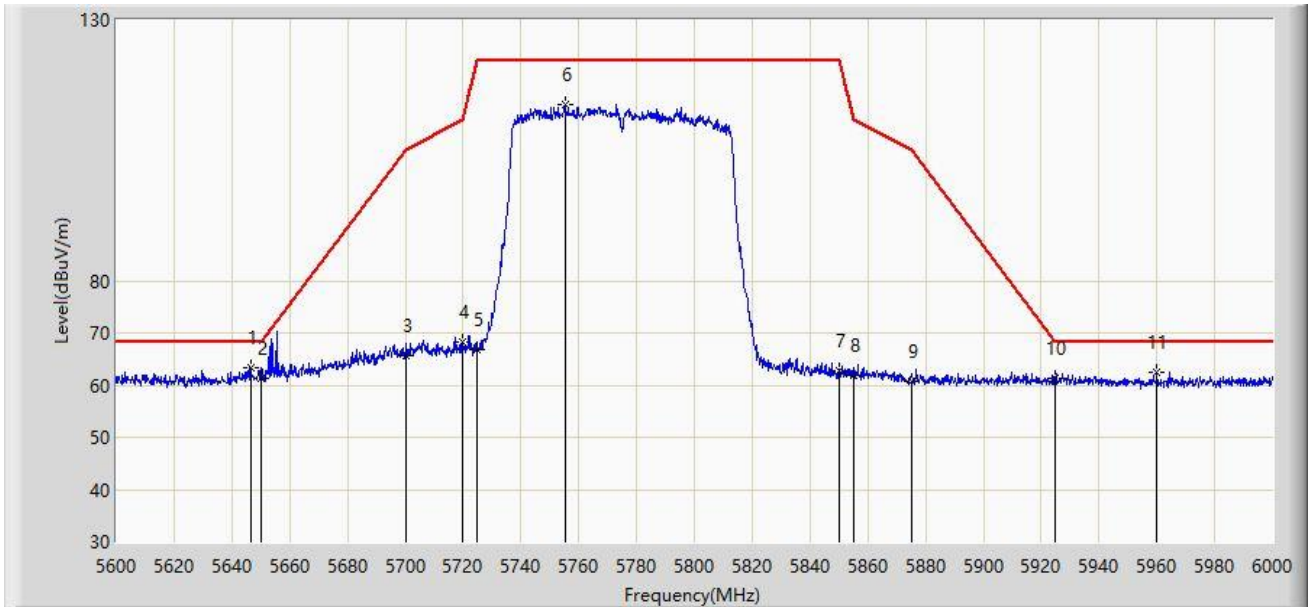

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5646.600	63.404	59.355	-4.796	68.200	4.050	PK
2		5650.000	61.286	57.152	-6.914	68.200	4.134	PK
3		5700.000	65.603	61.429	-39.597	105.200	4.173	PK
4		5720.000	68.133	63.916	-42.667	110.800	4.217	PK
5		5725.000	66.681	62.450	-55.519	122.200	4.231	PK
6		5755.200	113.835	109.425	N/A	N/A	4.410	PK
7		5850.000	62.795	58.195	-59.405	122.200	4.599	PK
8		5855.000	61.961	57.401	-48.839	110.800	4.560	PK
9		5875.000	60.633	56.170	-44.567	105.200	4.462	PK
10		5925.000	61.192	56.561	-7.008	68.200	4.631	PK
11		5960.000	62.364	57.900	-5.836	68.200	4.464	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 00:11
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

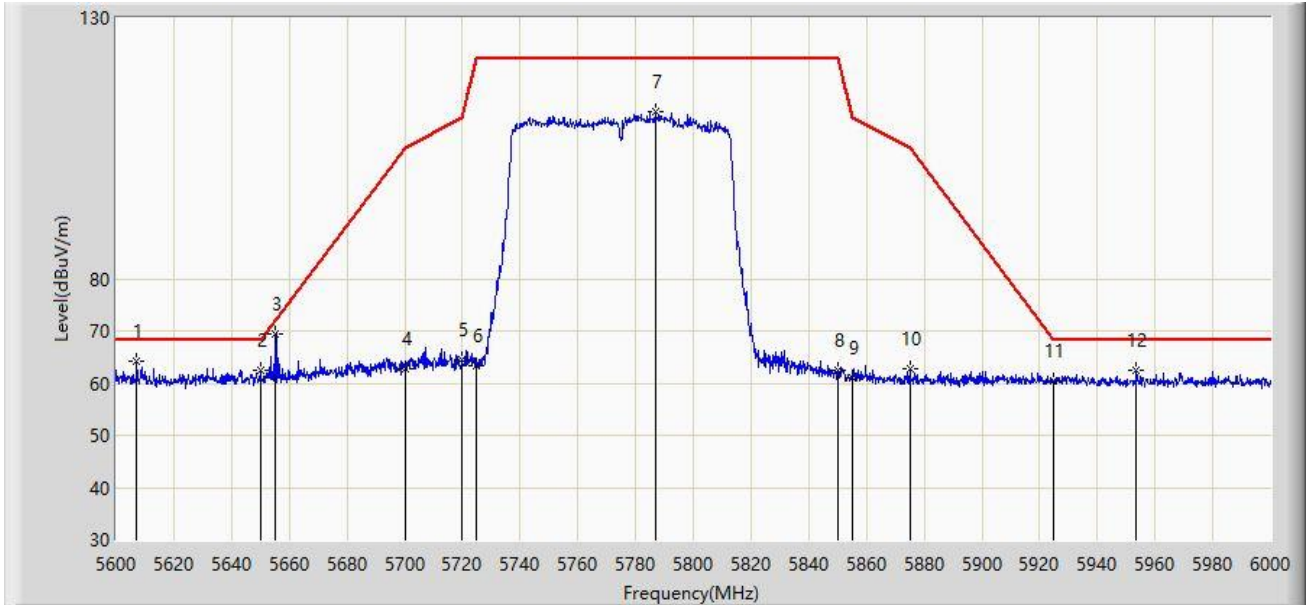


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5607.200	64.258	60.159	-3.942	68.200	4.099	PK
2		5650.000	62.409	58.275	-5.791	68.200	4.134	PK
3	*	5655.200	69.314	65.056	-2.734	72.048	4.258	PK
4		5700.000	62.837	58.663	-42.363	105.200	4.173	PK
5		5720.000	64.386	60.169	-46.414	110.800	4.217	PK
6		5725.000	63.466	59.235	-58.734	122.200	4.231	PK
7		5786.800	111.942	107.605	N/A	N/A	4.338	PK
8		5850.000	62.324	57.724	-59.876	122.200	4.599	PK
9		5855.000	60.980	56.420	-49.820	110.800	4.560	PK
10		5875.000	62.769	58.306	-42.431	105.200	4.462	PK
11		5925.000	60.565	55.934	-7.635	68.200	4.631	PK
12		5953.600	62.327	57.864	-5.873	68.200	4.462	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:24
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

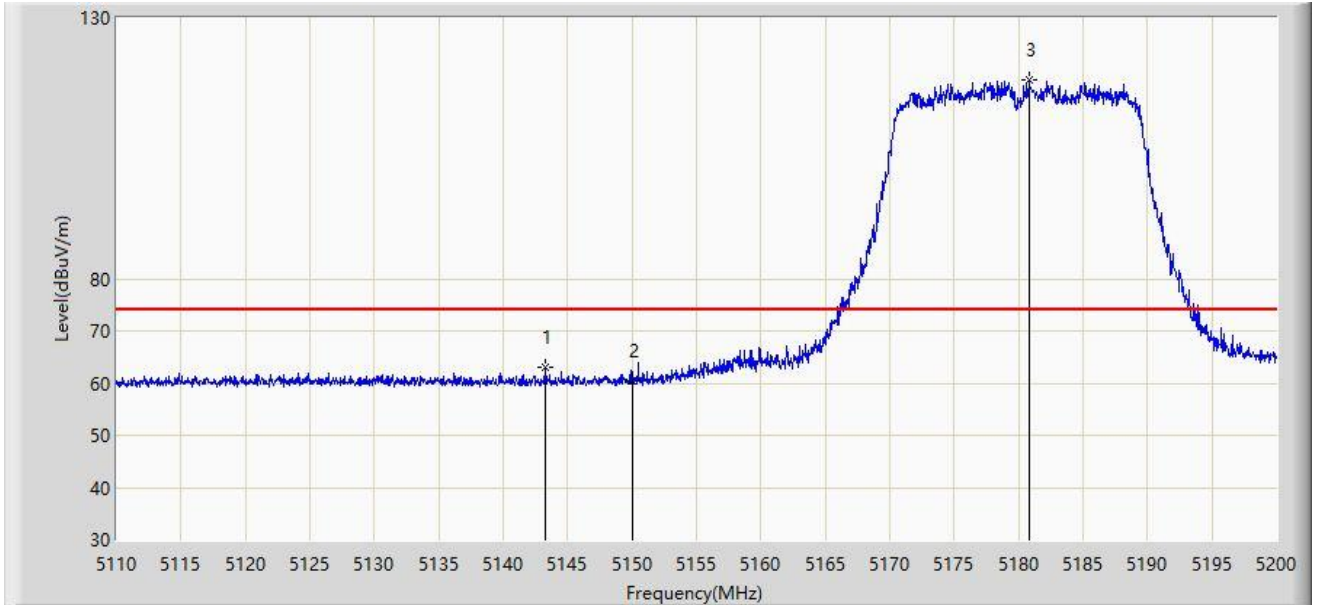


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5143.255	63.075	59.188	-10.925	74.000	3.888	PK
2		5150.000	60.384	56.509	-13.616	74.000	3.876	PK
3		5180.785	118.128	114.532	N/A	N/A	3.596	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:22
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

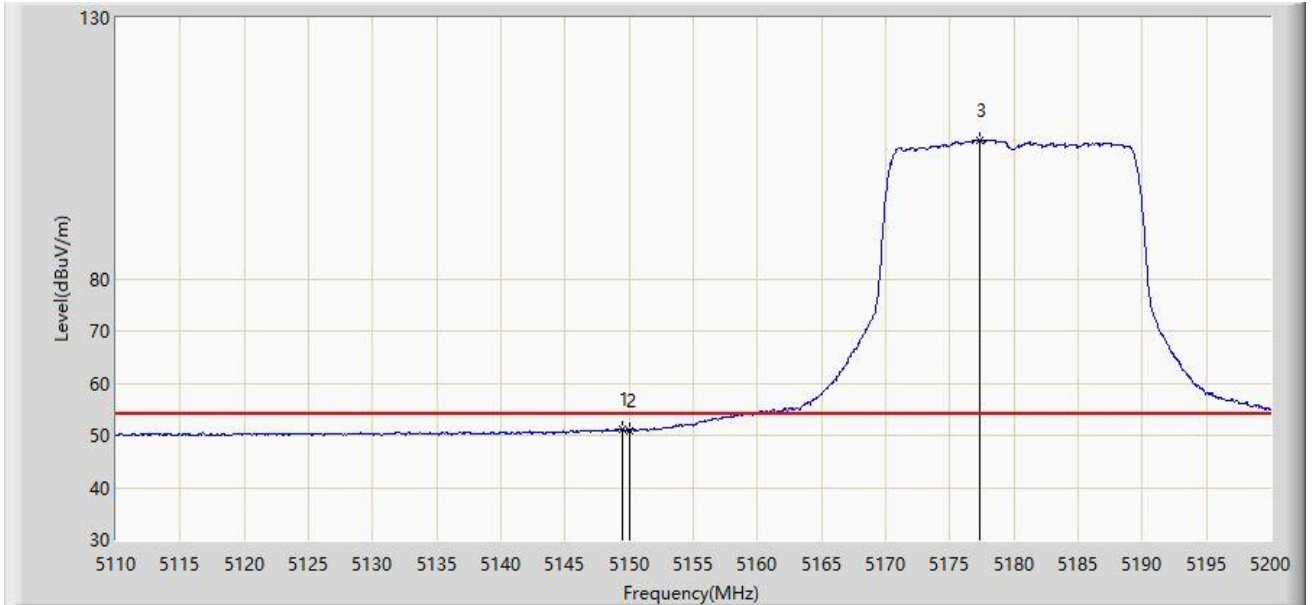


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5149.510	51.162	47.286	-2.838	54.000	3.875	AV
2		5150.000	50.942	47.067	-3.058	54.000	3.876	AV
3		5177.320	106.581	102.948	N/A	N/A	3.633	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:21
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

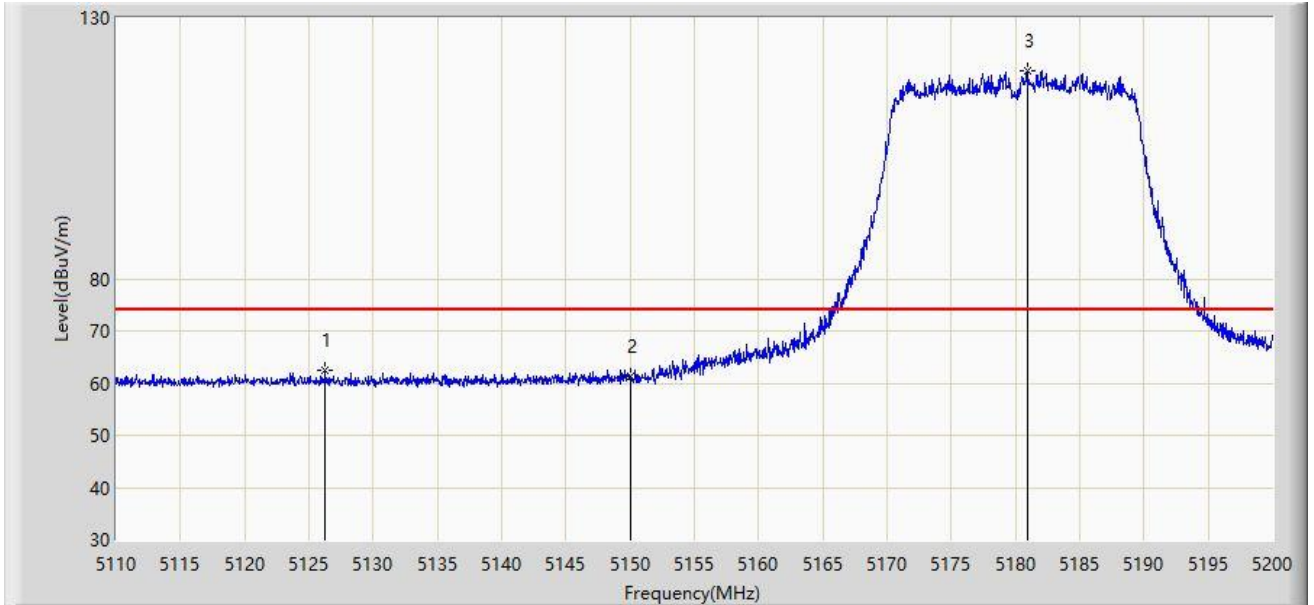


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5126.290	62.465	58.622	-11.535	74.000	3.843	PK
2		5150.000	61.245	57.370	-12.755	74.000	3.876	PK
3		5180.920	119.858	116.264	N/A	N/A	3.593	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:19
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

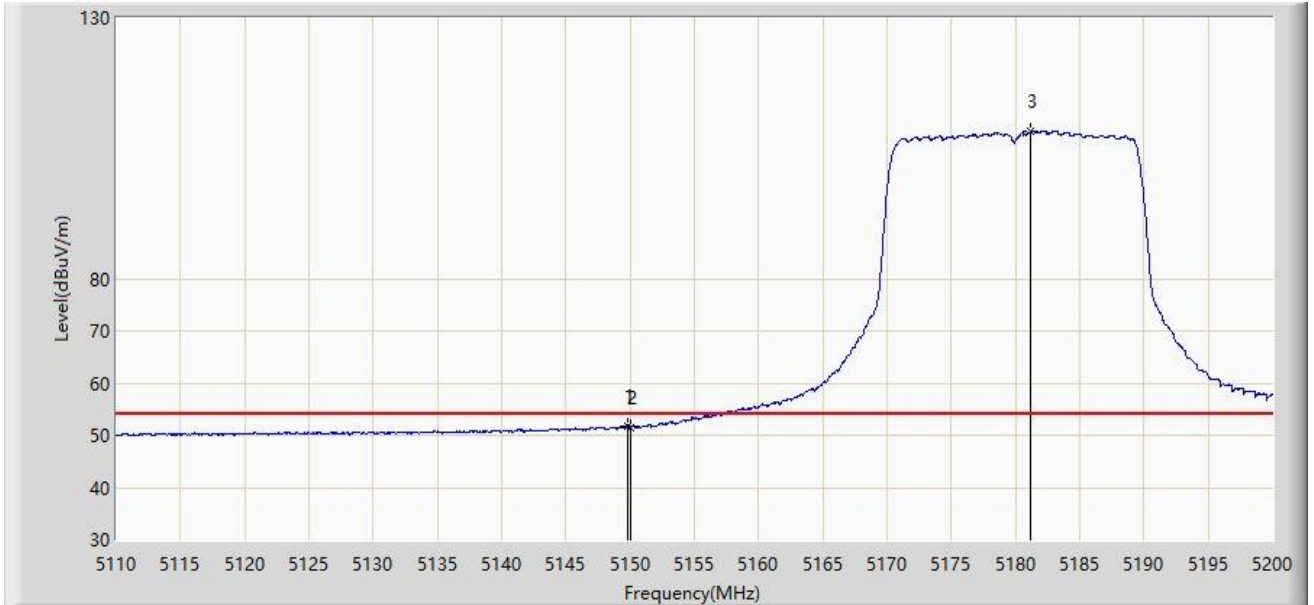


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5149.780	51.718	47.843	-2.282	54.000	3.875	AV
2		5150.000	51.473	47.598	-2.527	54.000	3.876	AV
3		5181.145	108.140	104.548	N/A	N/A	3.592	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:34
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

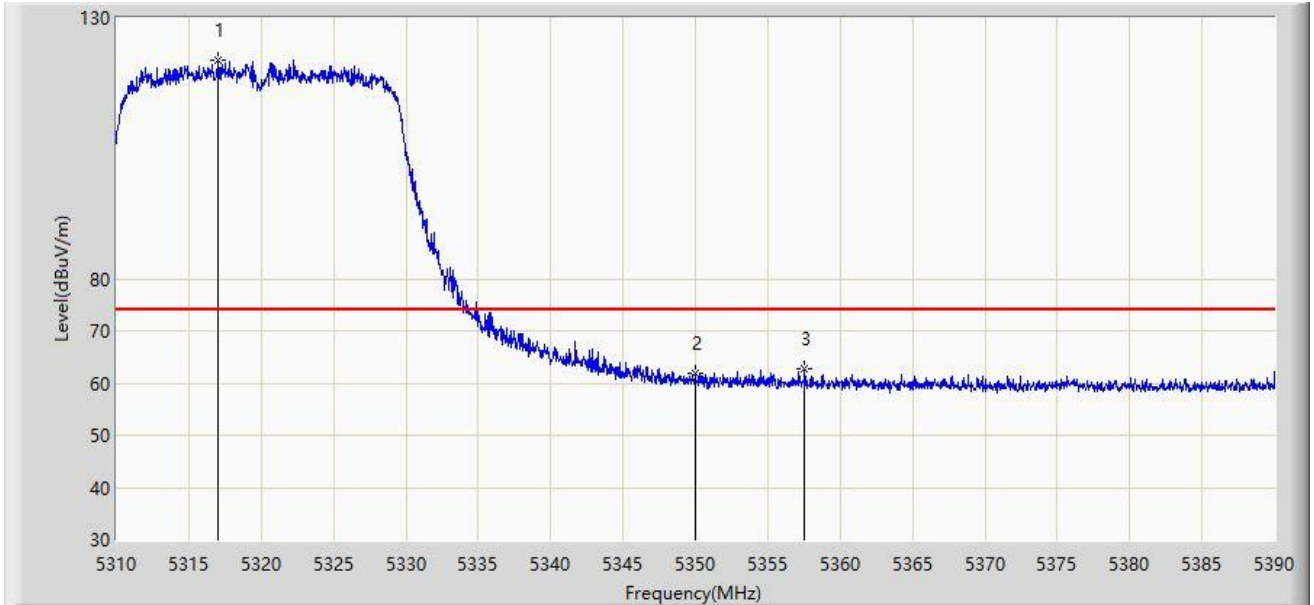


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5317.040	121.985	118.319	N/A	N/A	3.666	PK
2		5350.000	61.878	58.344	-12.122	74.000	3.534	PK
3	*	5357.560	62.708	59.234	-11.292	74.000	3.474	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:32
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

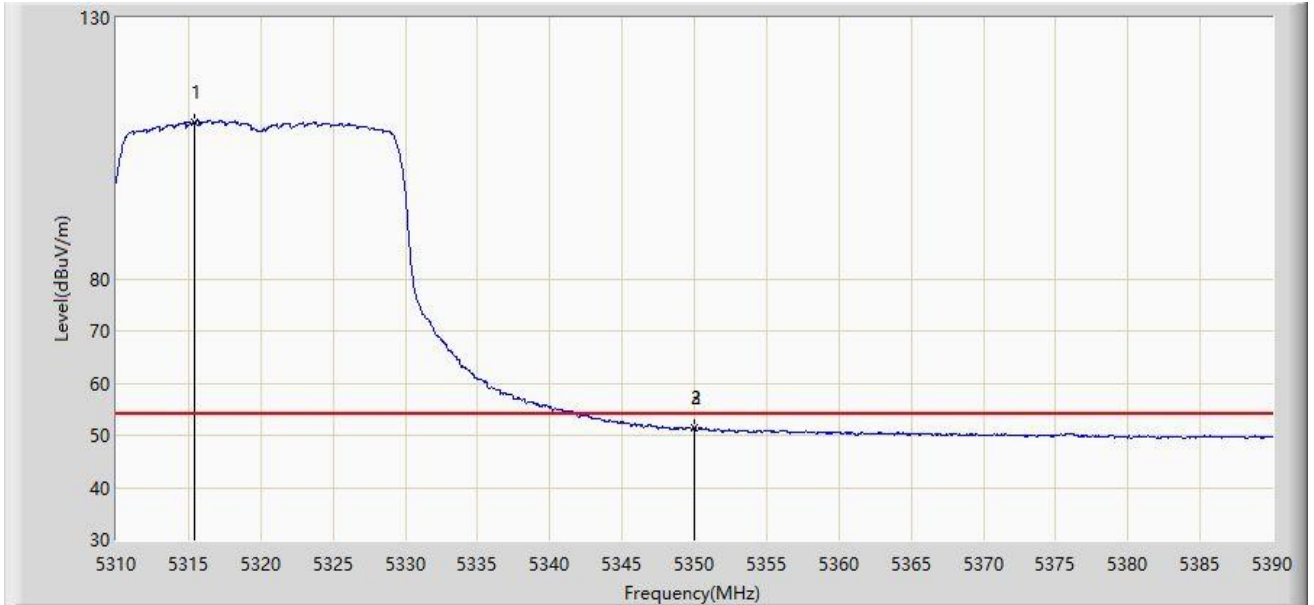


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5315.400	110.020	106.363	N/A	N/A	3.657	AV
2		5350.000	51.398	47.864	-2.602	54.000	3.534	AV
3	*	5350.040	51.489	47.955	-2.511	54.000	3.534	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:29
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

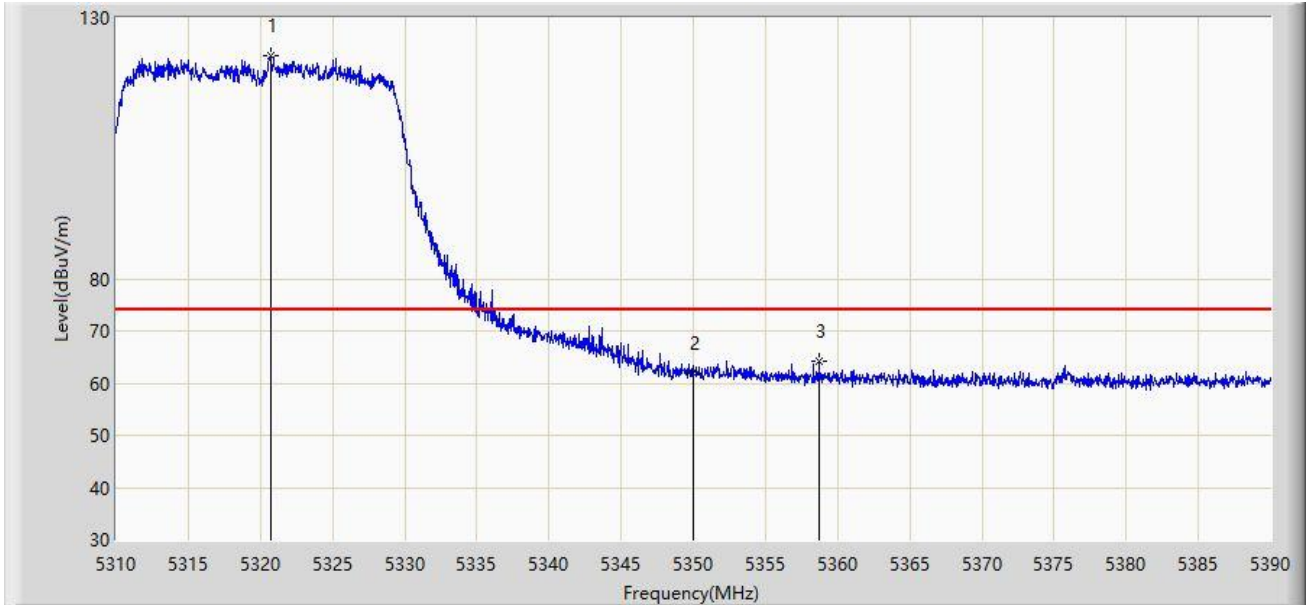

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5320.720	122.807	119.153	N/A	N/A	3.655	PK
2		5350.000	62.021	58.487	-11.979	74.000	3.534	PK
3	*	5358.720	64.188	60.724	-9.812	74.000	3.464	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 00:27
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

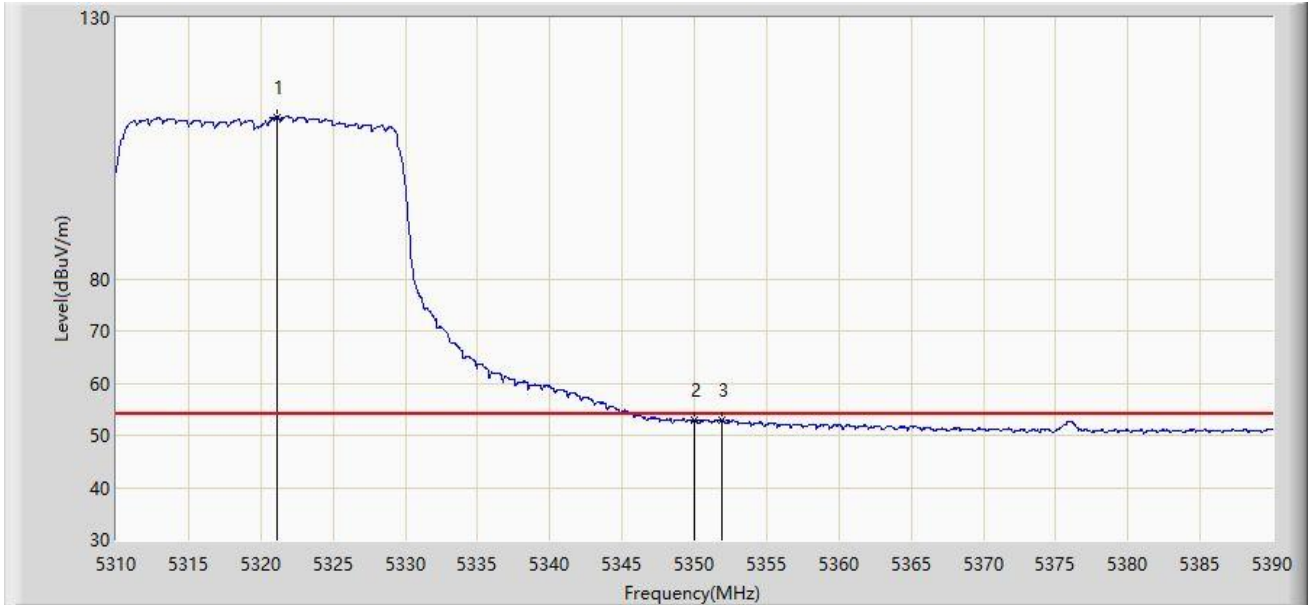


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5321.080	110.960	107.308	N/A	N/A	3.652	AV
2	*	5350.000	52.919	49.385	-1.081	54.000	3.534	AV
3		5351.920	52.884	49.362	-1.116	54.000	3.521	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:44
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

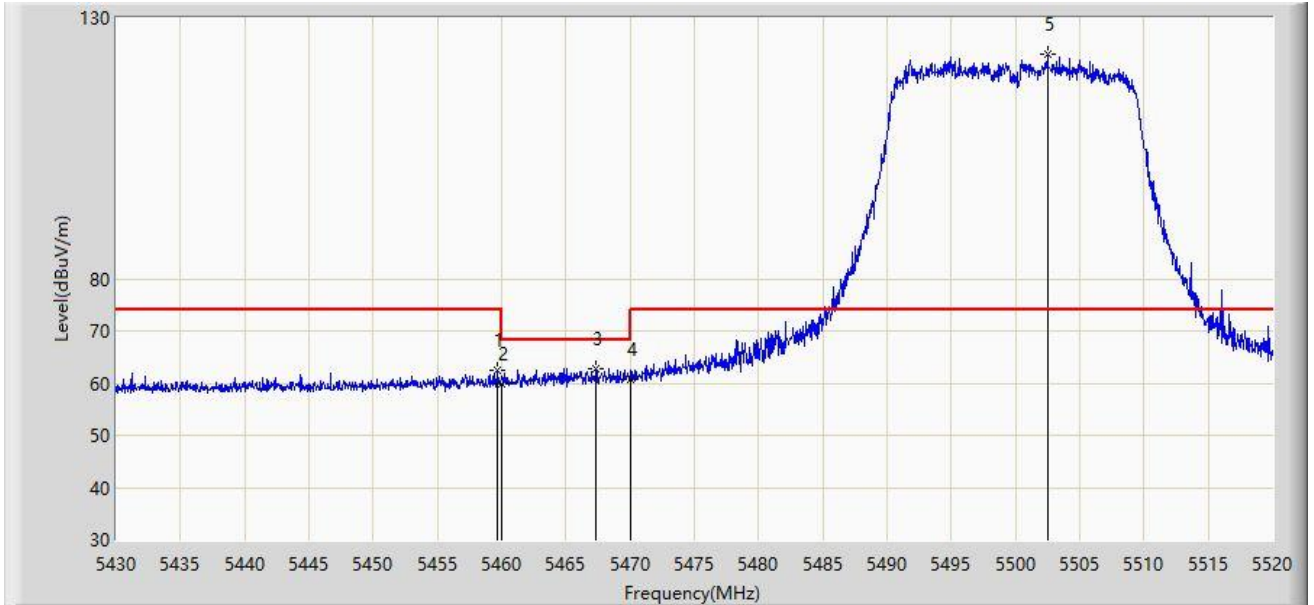

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5459.700	62.551	58.771	-11.449	74.000	3.780	PK
2		5460.000	59.790	56.009	-14.210	74.000	3.782	PK
3	*	5467.350	62.623	58.812	-5.577	68.200	3.811	PK
4		5470.000	60.853	57.031	-7.347	68.200	3.822	PK
5		5502.495	122.998	118.898	N/A	N/A	4.100	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 00:42
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

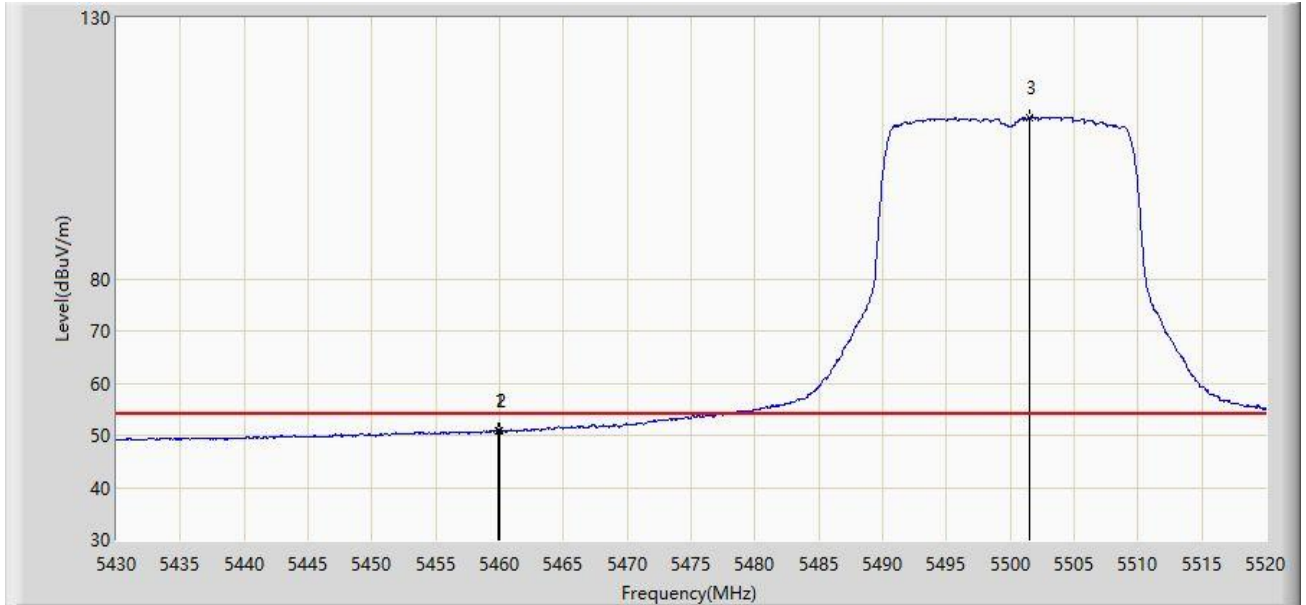


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.835	50.843	47.062	-3.157	54.000	3.781	AV
2		5460.000	50.752	46.971	-3.248	54.000	3.782	AV
3		5501.550	110.934	106.836	N/A	N/A	4.098	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:40
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

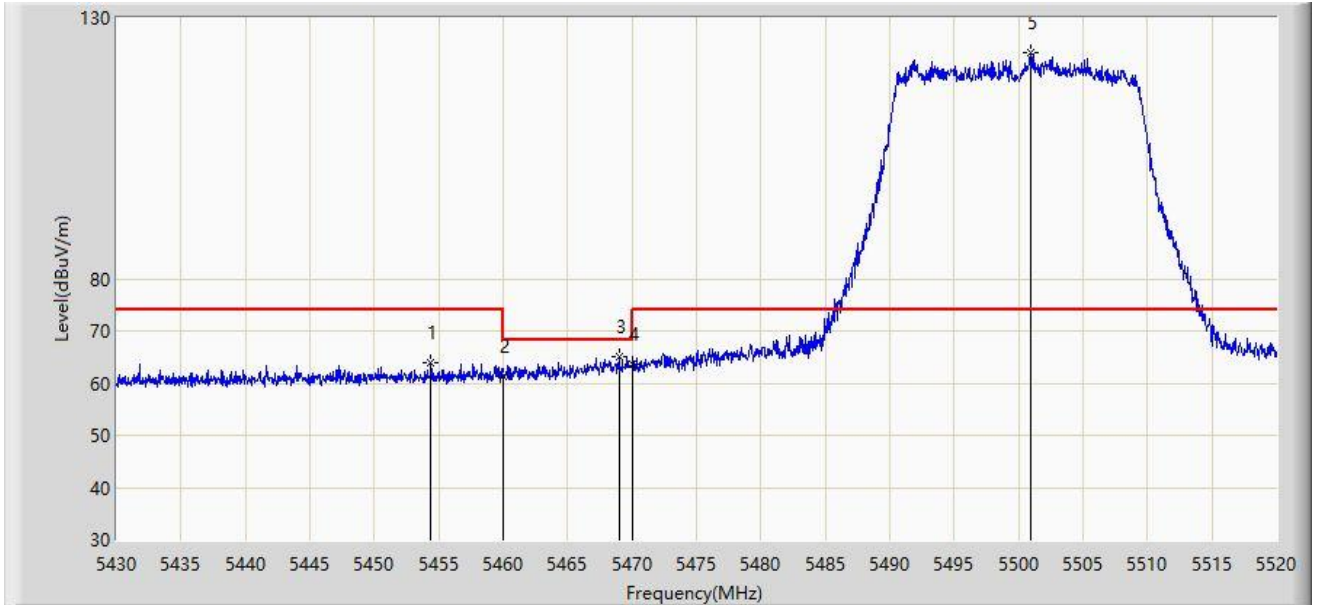

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5454.390	63.899	60.156	-10.101	74.000	3.744	PK
2		5460.000	61.440	57.659	-12.560	74.000	3.782	PK
3	*	5468.970	65.077	61.259	-3.123	68.200	3.818	PK
4		5470.000	63.522	59.700	-4.678	68.200	3.822	PK
5		5500.965	123.202	119.106	N/A	N/A	4.096	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 00:38
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

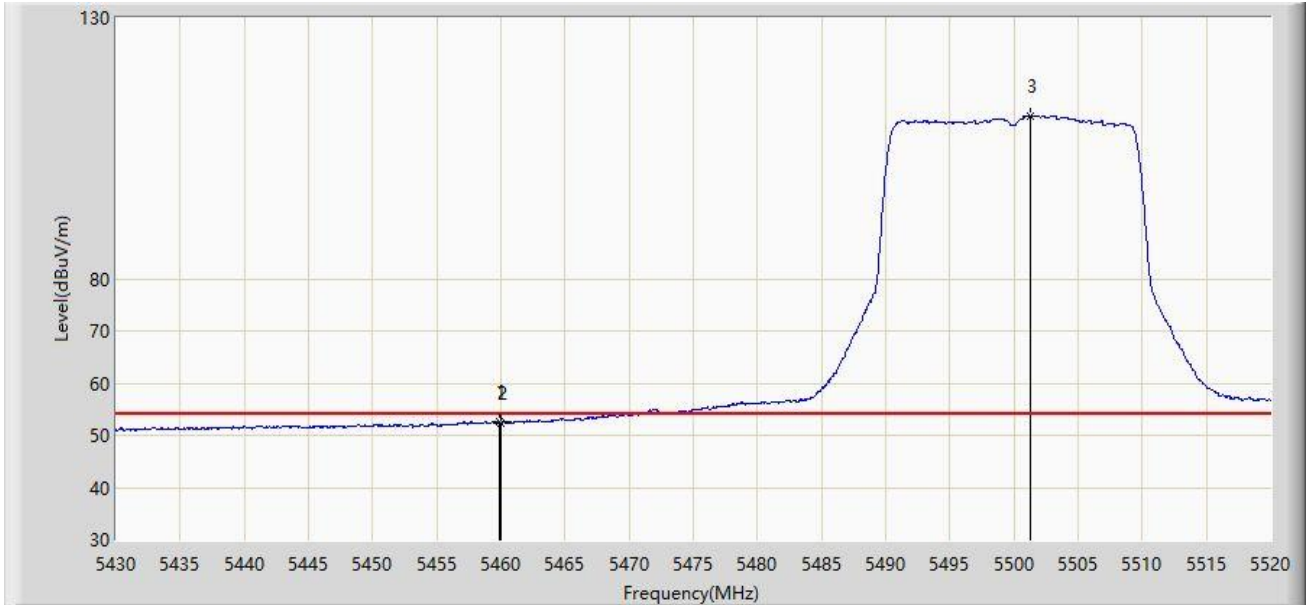


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5459.880	52.569	48.788	-1.431	54.000	3.781	AV
2		5460.000	52.418	48.637	-1.582	54.000	3.782	AV
3		5501.235	111.257	107.160	N/A	N/A	4.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 00:51
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

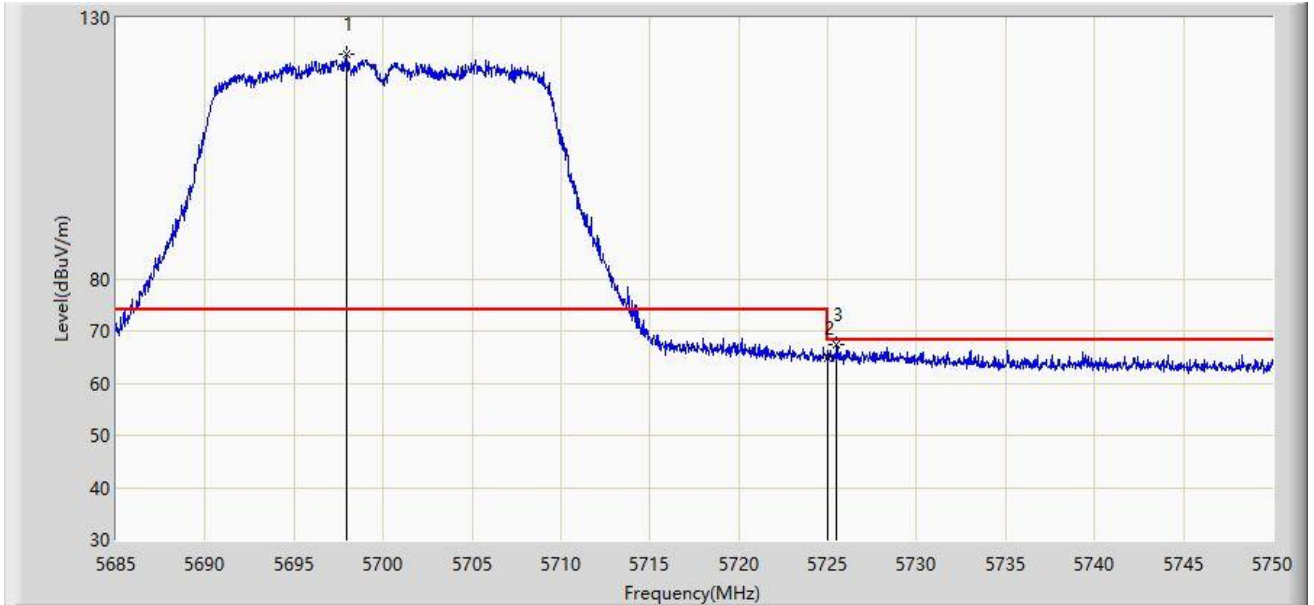


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5697.935	122.991	118.822	N/A	N/A	4.168	PK
2		5725.000	64.703	60.472	-3.497	68.200	4.231	PK
3	*	5725.495	67.257	63.025	-0.943	68.200	4.232	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 03:03
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

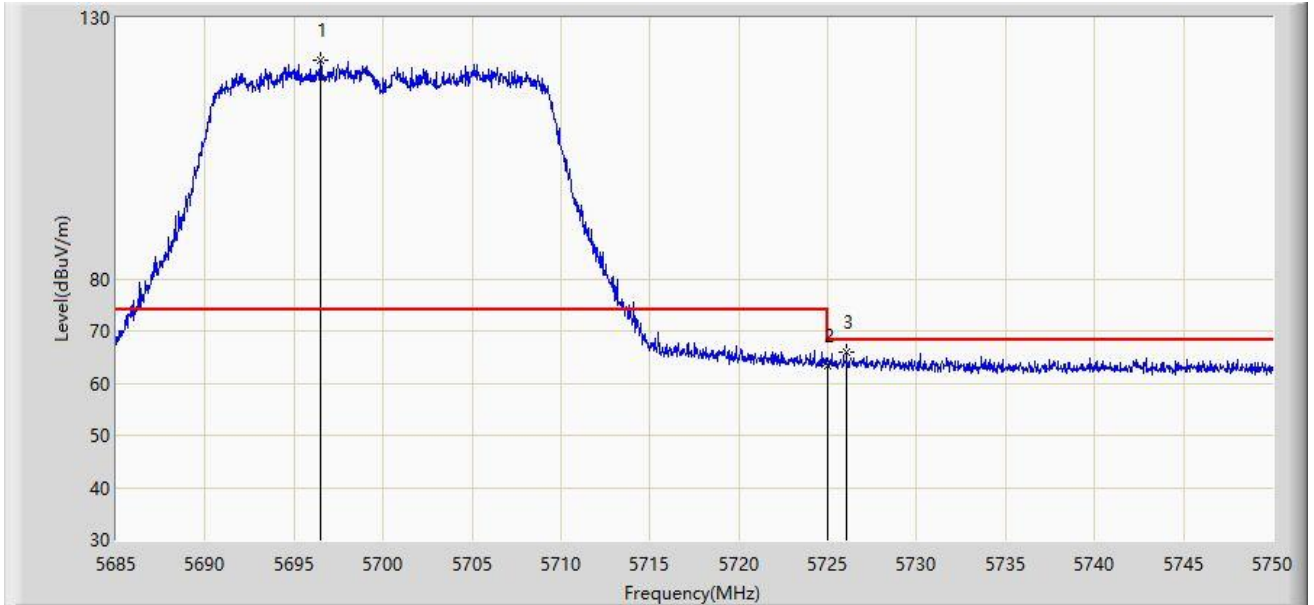

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5696.505	121.789	117.623	N/A	N/A	4.165	PK
2		5725.000	63.251	59.020	-4.949	68.200	4.231	PK
3	*	5726.047	65.854	61.621	-2.346	68.200	4.233	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 00:54
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

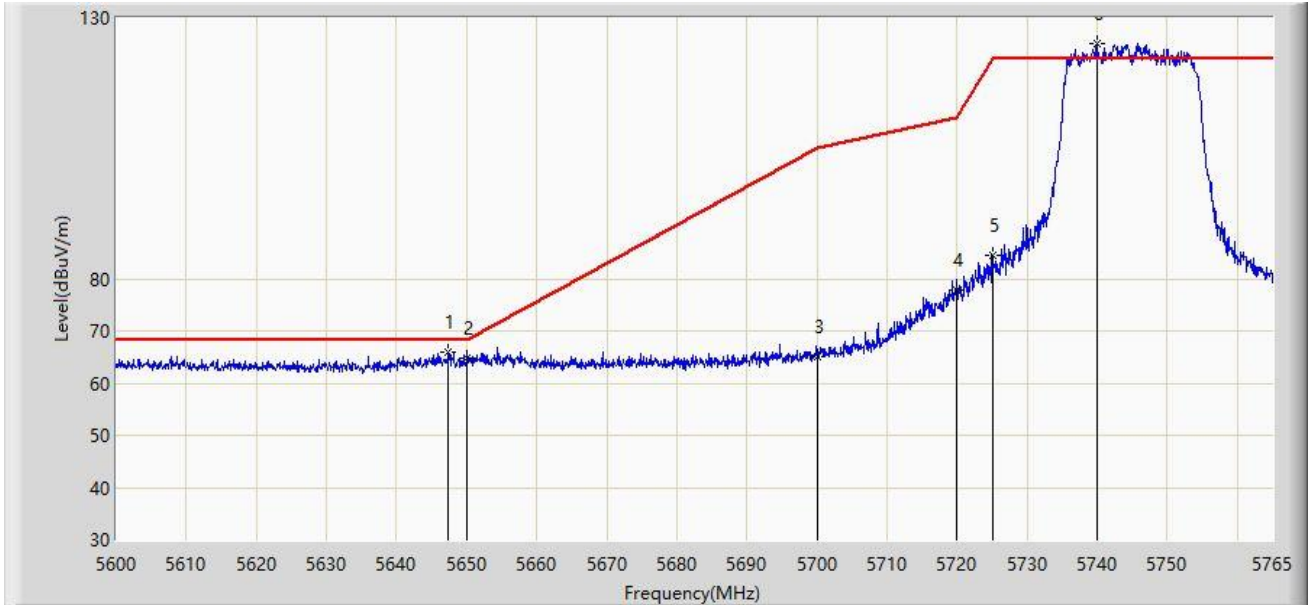

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.355	66.046	61.978	-2.154	68.200	4.068	PK
2		5650.000	64.696	60.562	-3.504	68.200	4.134	PK
3		5700.000	65.217	61.043	-39.983	105.200	4.173	PK
4		5720.000	77.869	73.652	-32.931	110.800	4.217	PK
5		5725.000	84.396	80.165	-37.804	122.200	4.231	PK
6		5739.920	125.123	120.762	N/A	N/A	4.361	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 00:57
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

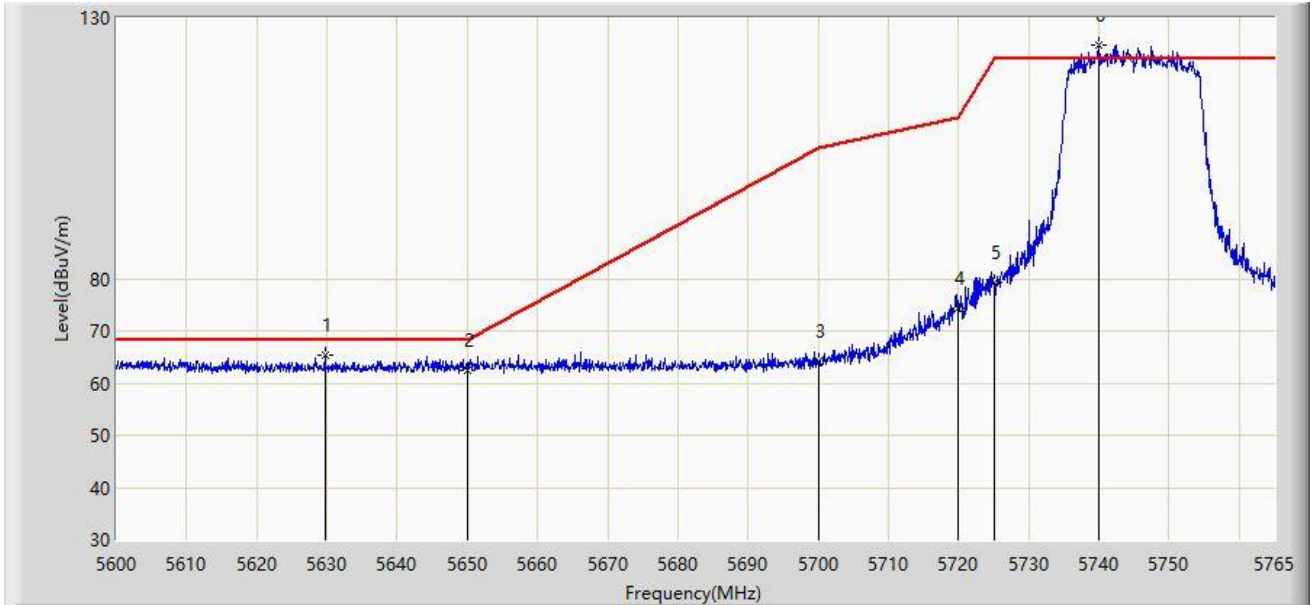

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5629.700	65.337	61.436	-2.863	68.200	3.901	PK
2		5650.000	62.601	58.467	-5.599	68.200	4.134	PK
3		5700.000	64.112	59.938	-41.088	105.200	4.173	PK
4		5720.000	74.281	70.064	-36.519	110.800	4.217	PK
5		5725.000	79.243	75.012	-42.957	122.200	4.231	PK
6		5740.002	124.694	120.333	N/A	N/A	4.361	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:04
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

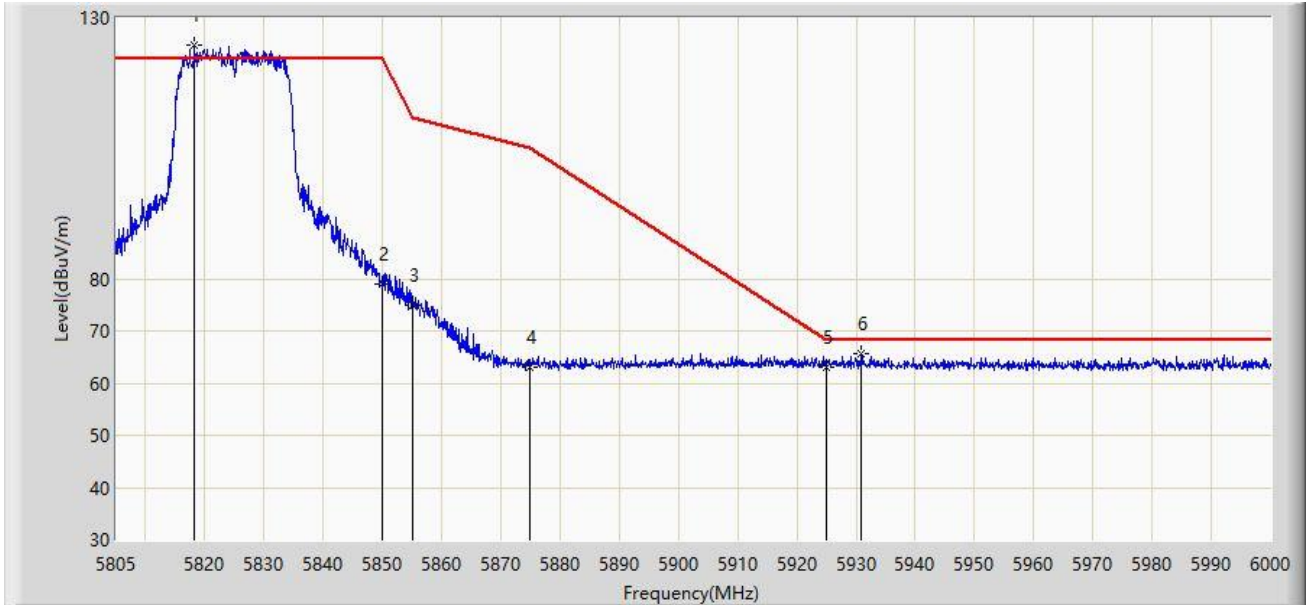


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5818.260	124.814	120.351	N/A	N/A	4.463	PK
2		5850.000	79.069	74.469	-43.131	122.200	4.599	PK
3		5855.000	74.997	70.437	-35.803	110.800	4.560	PK
4		5875.000	63.146	58.683	-42.054	105.200	4.462	PK
5		5925.000	63.075	58.444	-5.125	68.200	4.631	PK
6	*	5930.873	65.525	60.900	-2.675	68.200	4.625	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:07
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

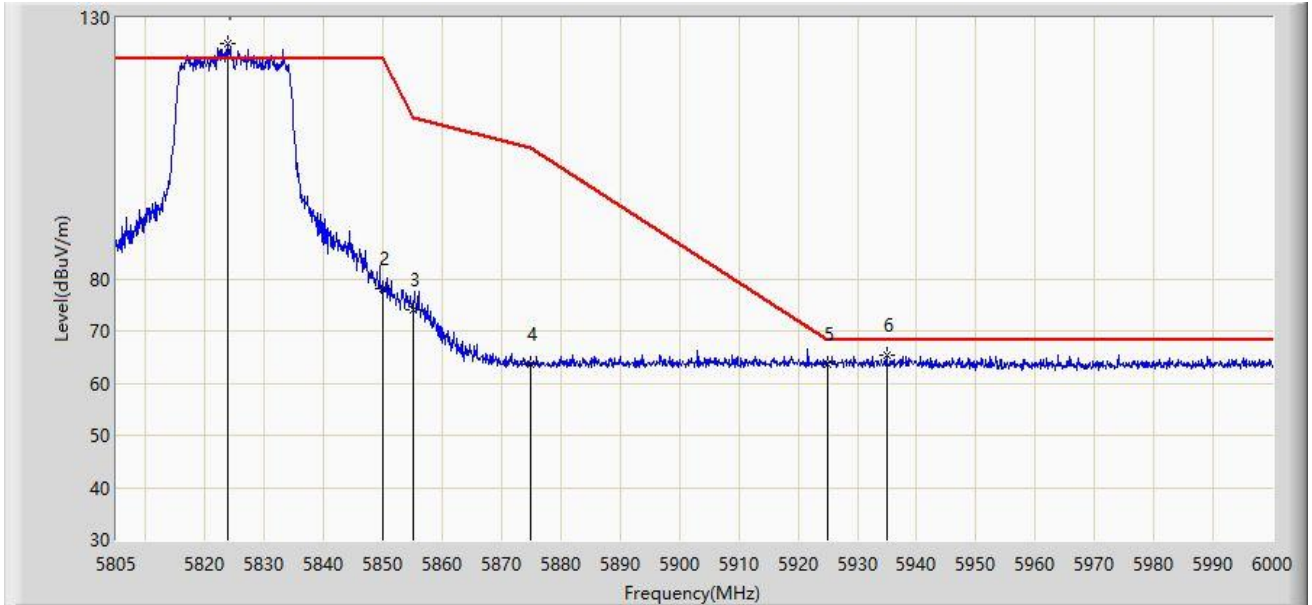

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5823.720	124.965	120.456	N/A	N/A	4.509	PK
2		5850.000	78.211	73.611	-43.989	122.200	4.599	PK
3		5855.000	73.946	69.386	-36.854	110.800	4.560	PK
4		5875.000	63.558	59.095	-41.642	105.200	4.462	PK
5		5925.000	63.529	58.898	-4.671	68.200	4.631	PK
6	*	5934.967	65.409	60.831	-2.791	68.200	4.578	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:25
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

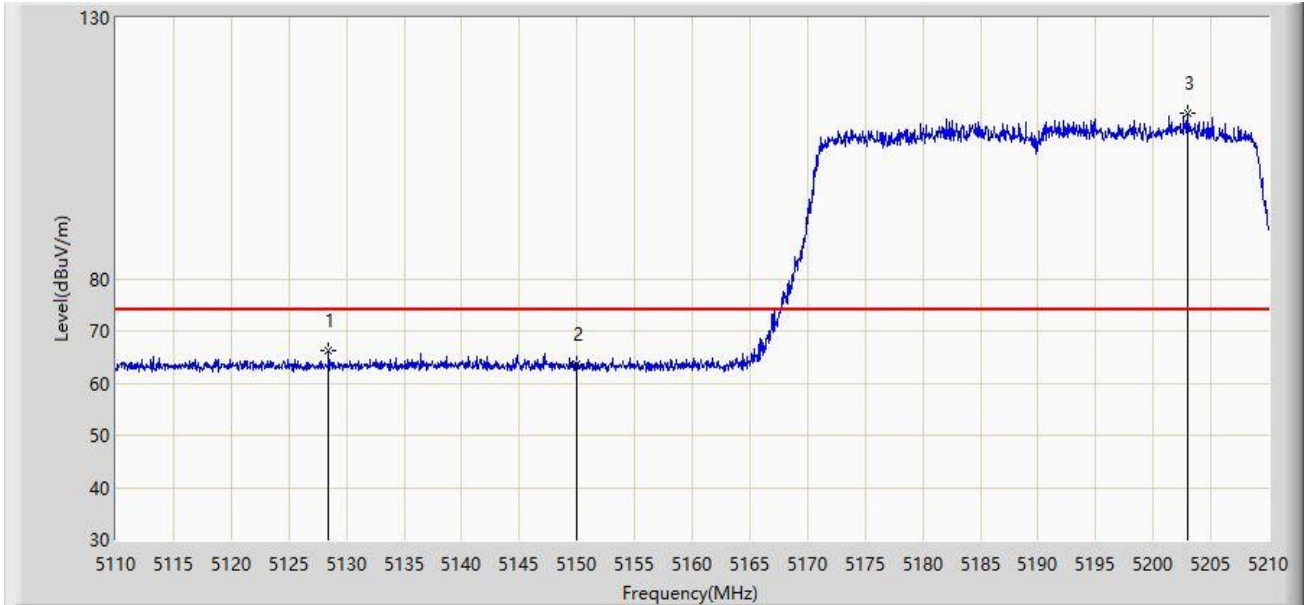

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5128.450	66.155	62.288	-7.845	74.000	3.867	PK
2		5150.000	63.592	59.717	-10.408	74.000	3.876	PK
3		5202.950	111.687	108.150	N/A	N/A	3.538	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:23
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

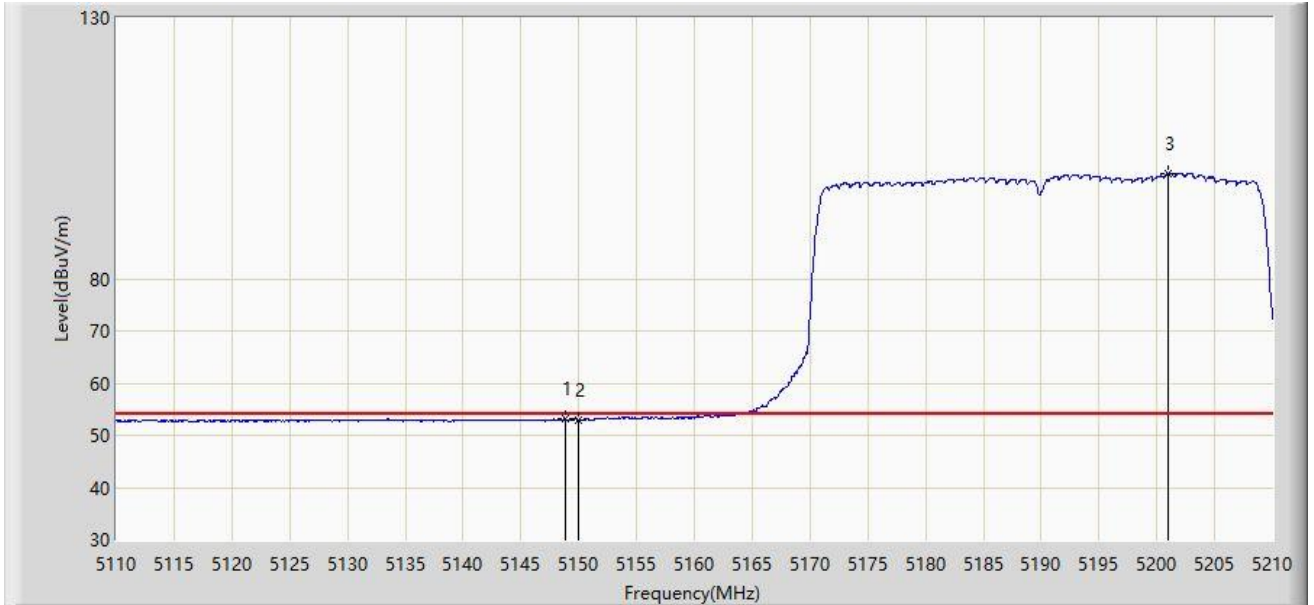

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5148.800	53.113	49.237	-0.887	54.000	3.876	AV
2		5150.000	52.885	49.010	-1.115	54.000	3.876	AV
3		5200.950	100.040	96.510	N/A	N/A	3.530	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:22
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

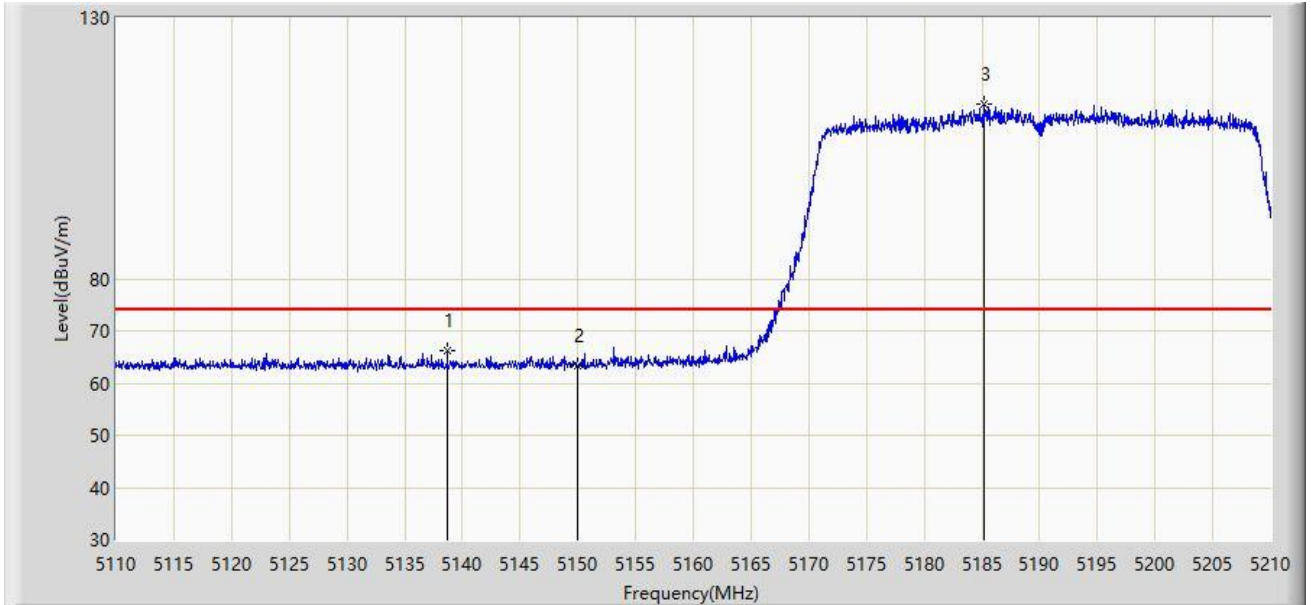


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5138.700	66.134	62.237	-7.866	74.000	3.897	PK
2		5150.000	63.365	59.490	-10.635	74.000	3.876	PK
3		5185.250	113.599	110.012	N/A	N/A	3.588	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:21
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

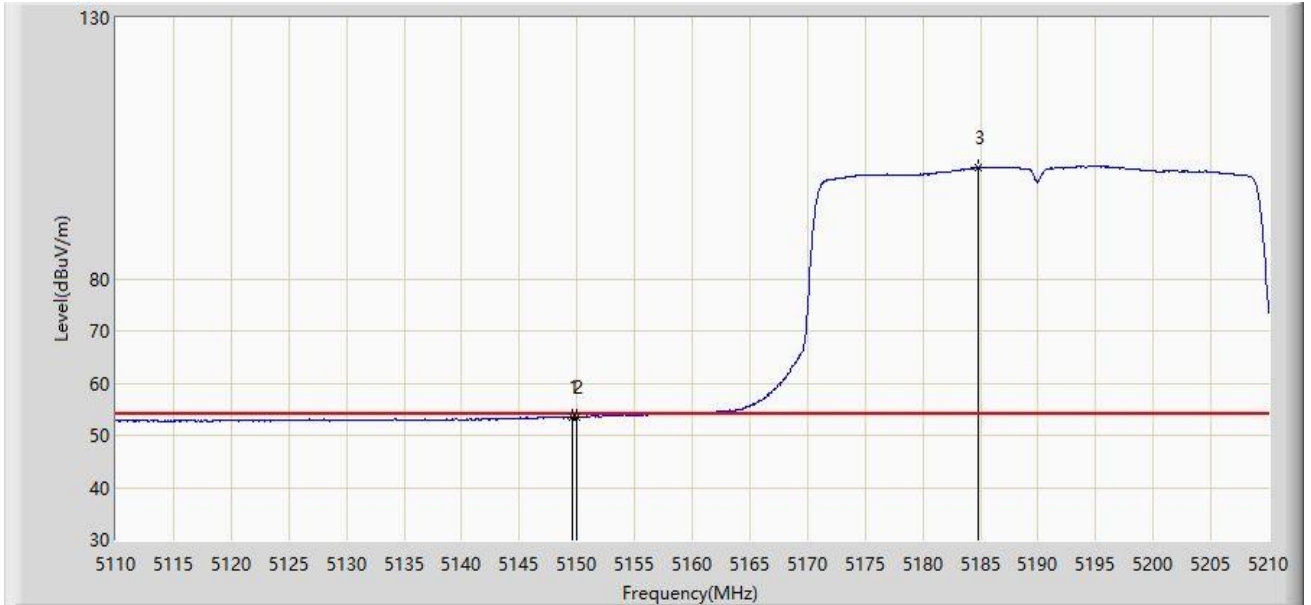

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5149.550	53.572	49.696	-0.428	54.000	3.875	AV
2		5150.000	53.390	49.515	-0.610	54.000	3.876	AV
3		5184.850	101.287	97.700	N/A	N/A	3.587	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:33
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

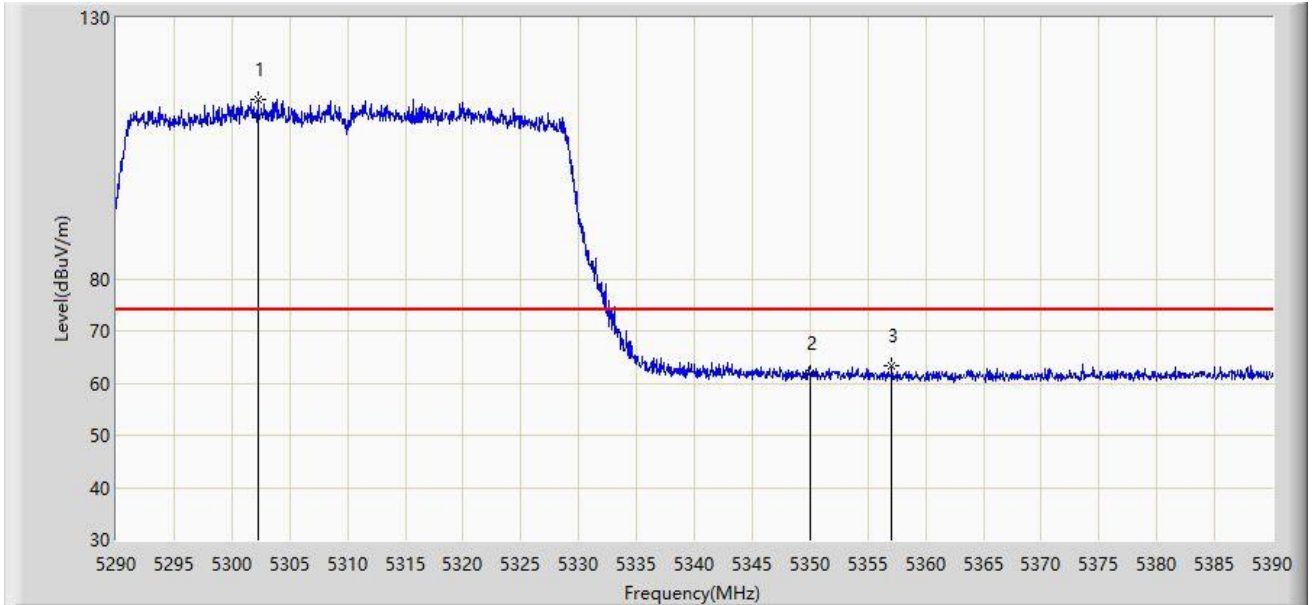


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5302.250	114.400	110.771	N/A	N/A	3.629	PK
2		5350.000	61.798	58.264	-12.202	74.000	3.534	PK
3	*	5357.100	63.249	59.771	-10.751	74.000	3.477	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:31
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

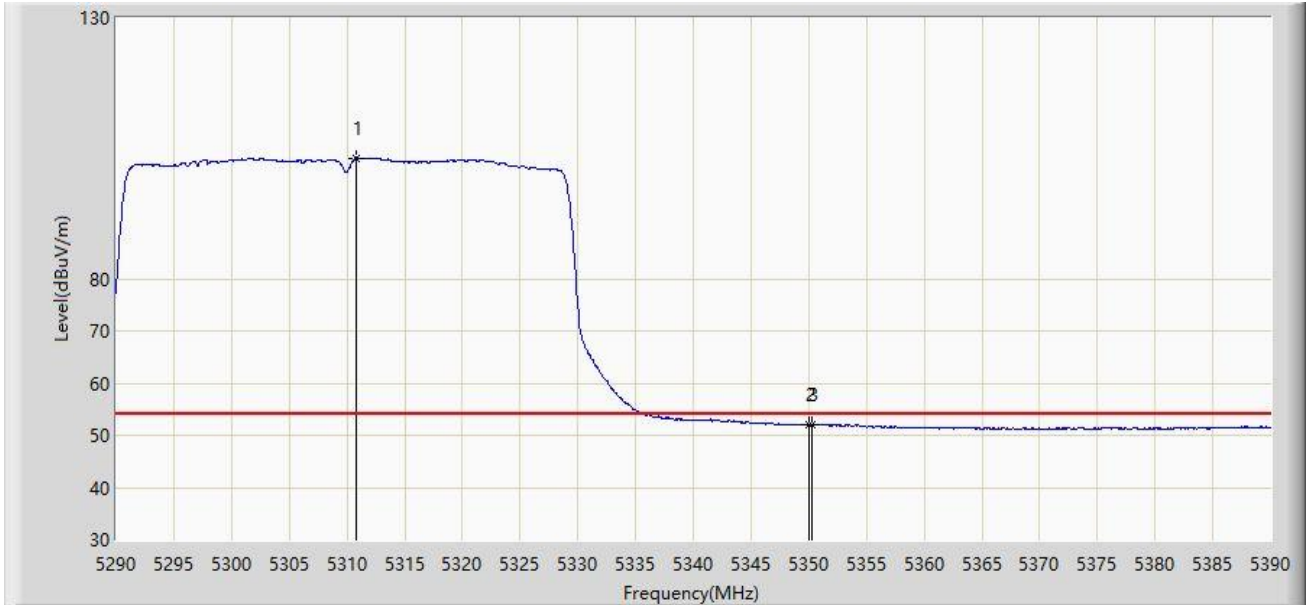

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5310.800	103.184	99.542	N/A	N/A	3.643	AV
2		5350.000	52.003	48.469	-1.997	54.000	3.534	AV
3	*	5350.250	52.083	48.551	-1.917	54.000	3.533	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:30
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

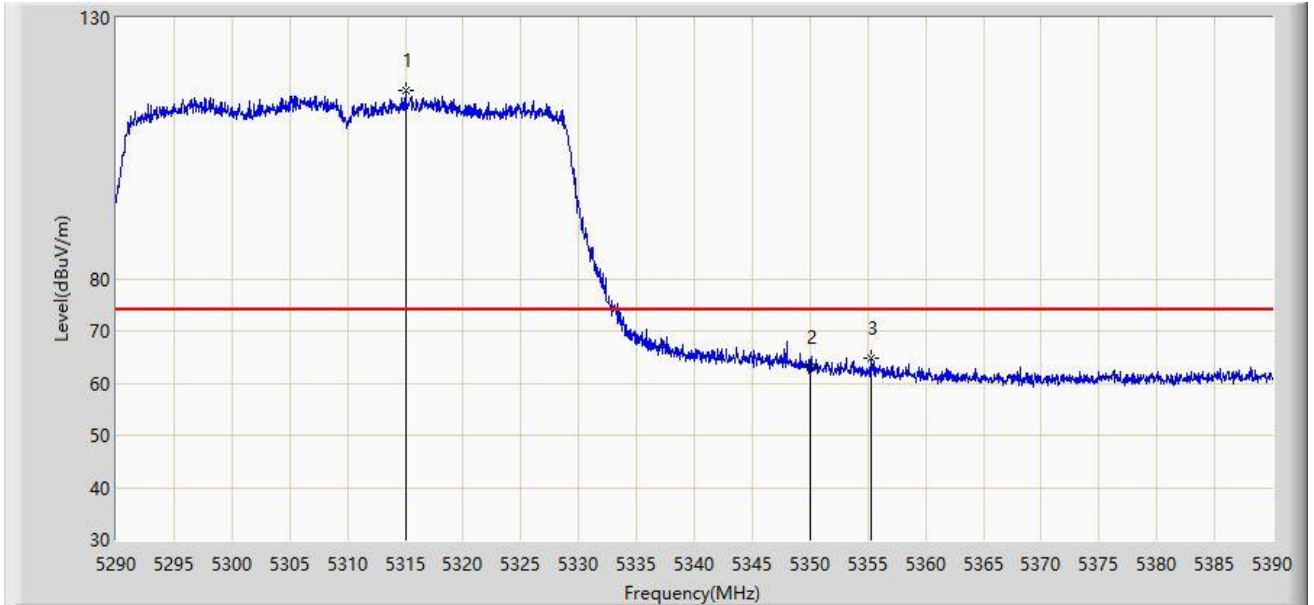


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.000	116.052	112.397	N/A	N/A	3.656	PK
2		5350.000	62.957	59.423	-11.043	74.000	3.534	PK
3	*	5355.350	64.667	61.174	-9.333	74.000	3.493	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:30
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

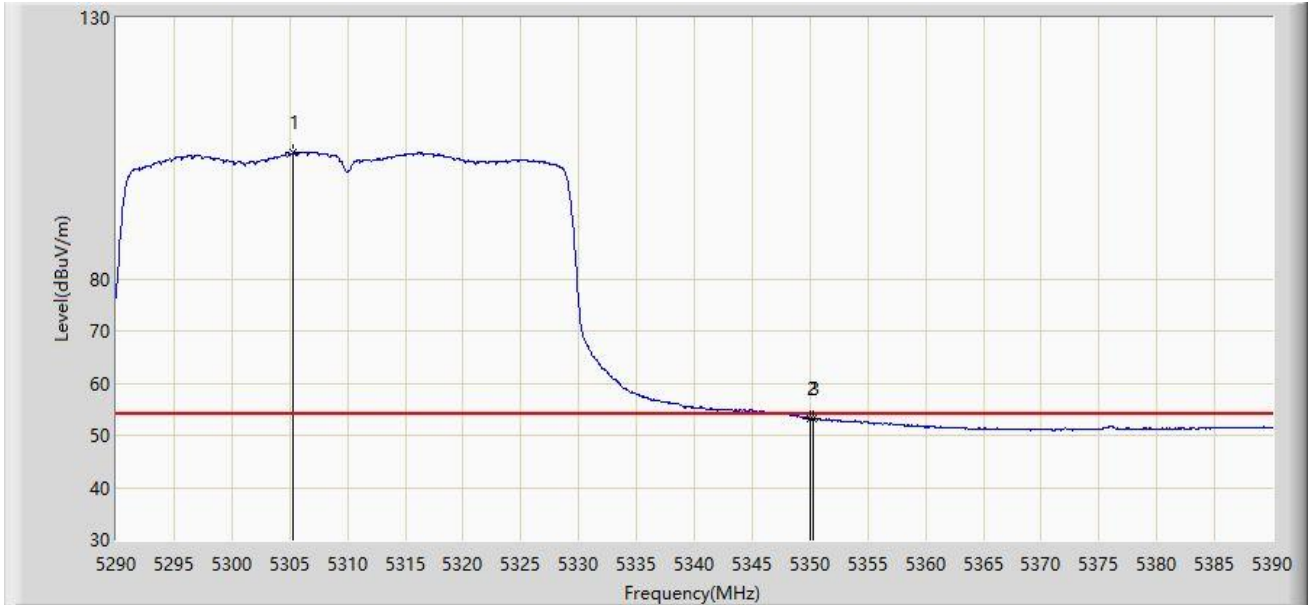


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5305.350	104.079	100.445	N/A	N/A	3.633	AV
2		5350.000	53.158	49.624	-0.842	54.000	3.534	AV
3	*	5350.300	53.225	49.693	-0.775	54.000	3.532	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:46
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

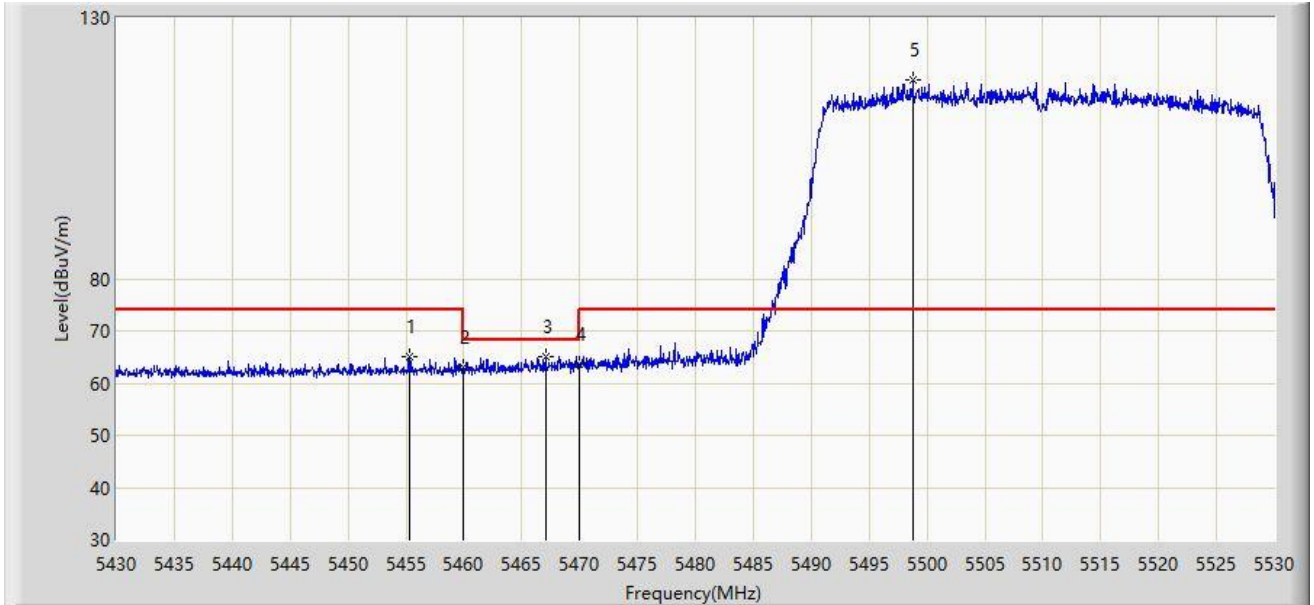


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5455.300	65.075	61.322	-8.925	74.000	3.752	PK
2		5460.000	63.053	59.272	-10.947	74.000	3.782	PK
3	*	5467.050	65.126	61.316	-3.074	68.200	3.810	PK
4		5470.000	63.752	59.930	-4.448	68.200	3.822	PK
5		5498.750	118.179	114.088	N/A	N/A	4.091	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:44
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

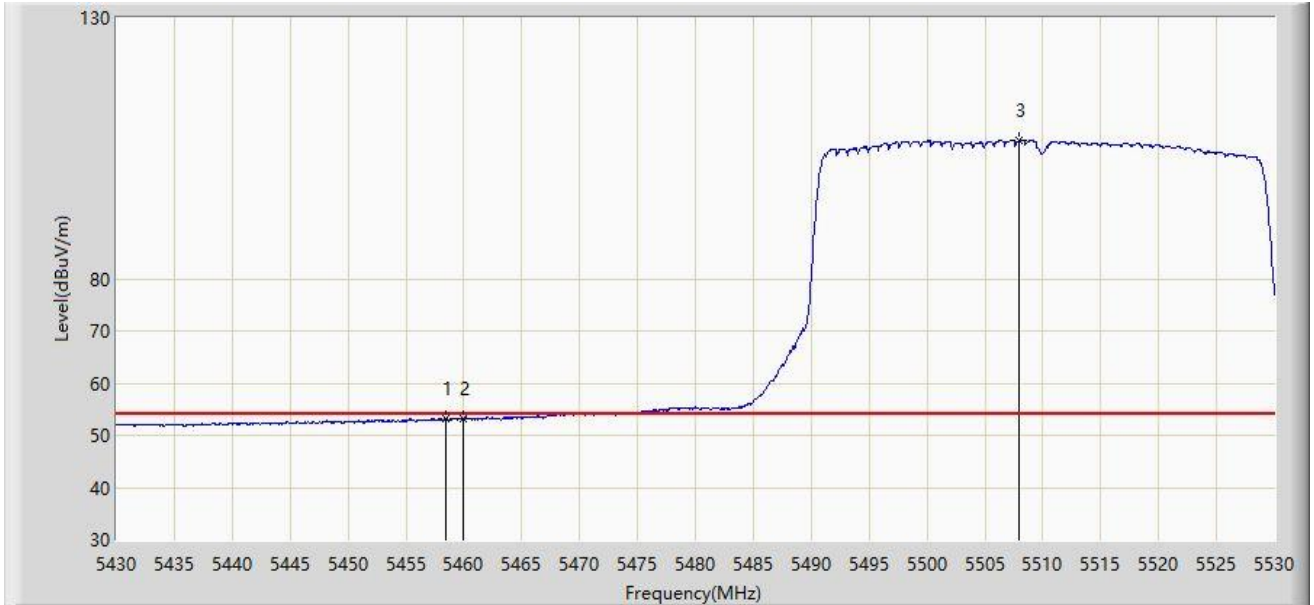


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5458.500	53.197	49.422	-0.803	54.000	3.775	AV
2		5460.000	53.157	49.376	-0.843	54.000	3.782	AV
3		5507.950	106.581	102.500	N/A	N/A	4.081	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:42
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

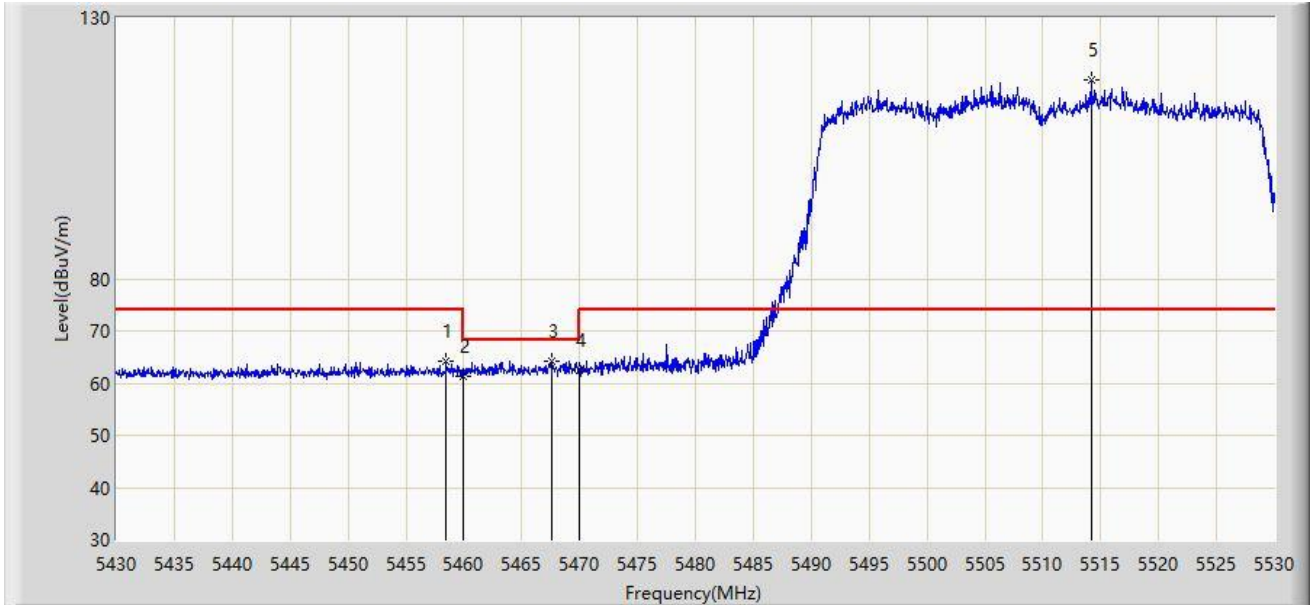


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.500	64.217	60.442	-9.783	74.000	3.775	PK
2		5460.000	61.354	57.573	-12.646	74.000	3.782	PK
3	*	5467.550	64.170	60.358	-4.030	68.200	3.813	PK
4		5470.000	62.492	58.670	-5.708	68.200	3.822	PK
5		5514.150	118.173	114.147	N/A	N/A	4.026	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:40
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

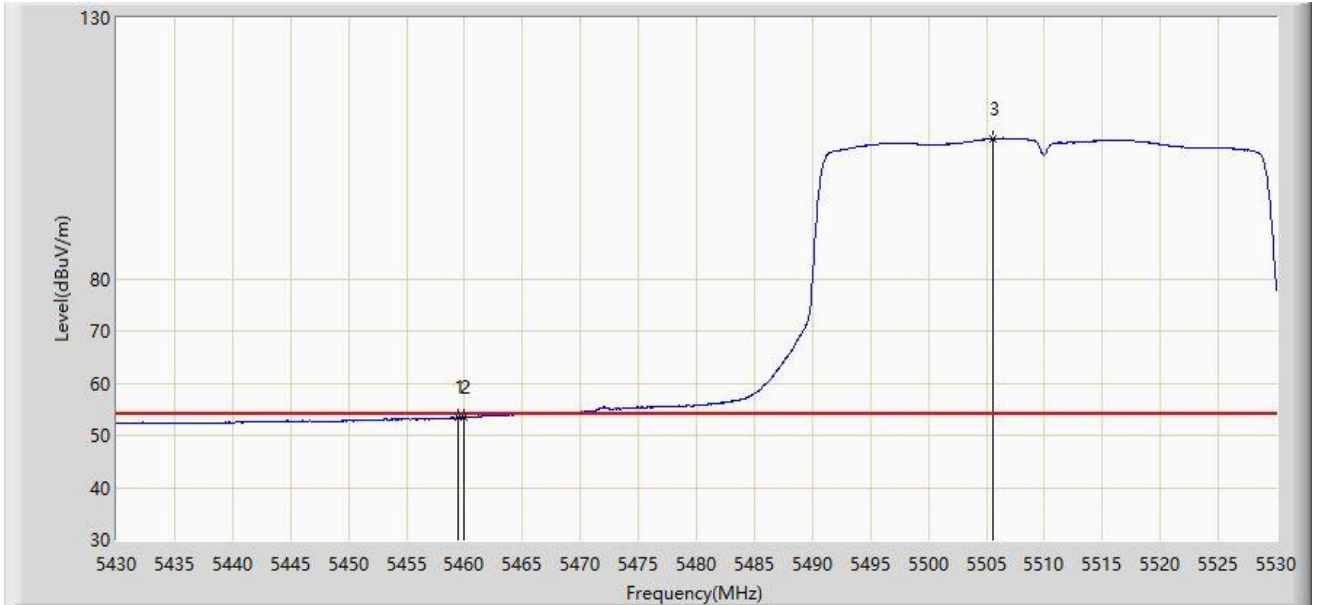


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5459.450	53.379	49.600	-0.621	54.000	3.779	AV
2	*	5460.000	53.396	49.615	-0.604	54.000	3.782	AV
3		5505.600	106.877	102.776	N/A	N/A	4.100	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:46
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

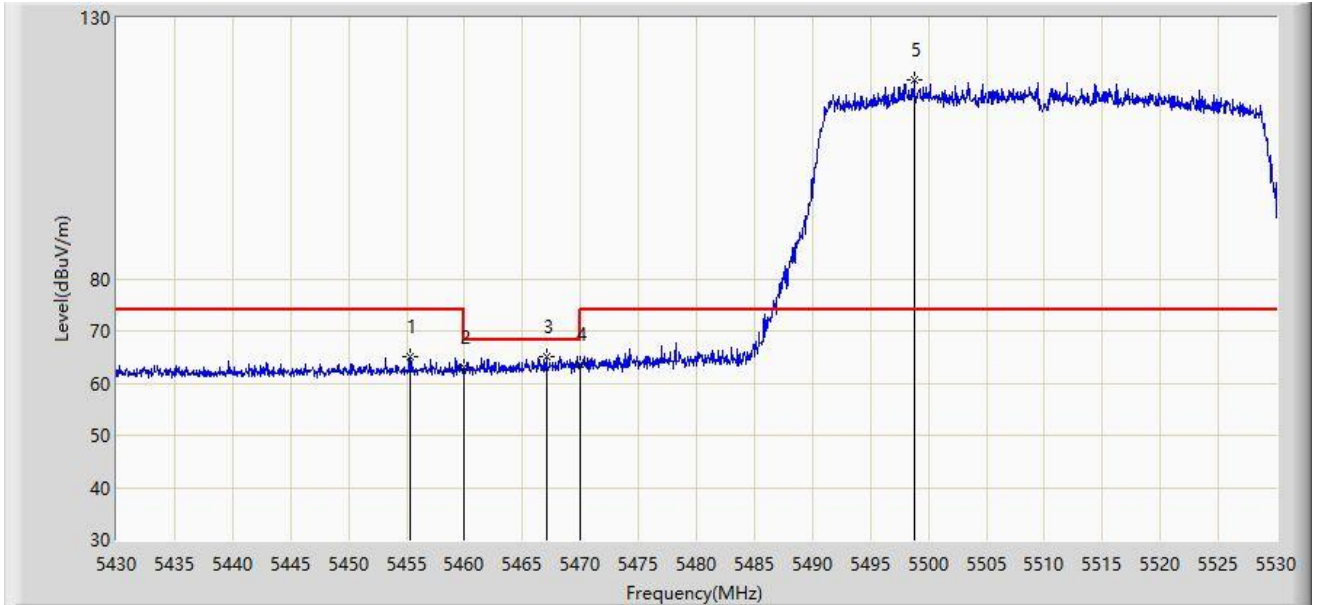

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5455.300	65.075	61.322	-8.925	74.000	3.752	PK
2		5460.000	63.053	59.272	-10.947	74.000	3.782	PK
3	*	5467.050	65.126	61.316	-3.074	68.200	3.810	PK
4		5470.000	63.752	59.930	-4.448	68.200	3.822	PK
5		5498.750	118.179	114.088	N/A	N/A	4.091	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:44
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

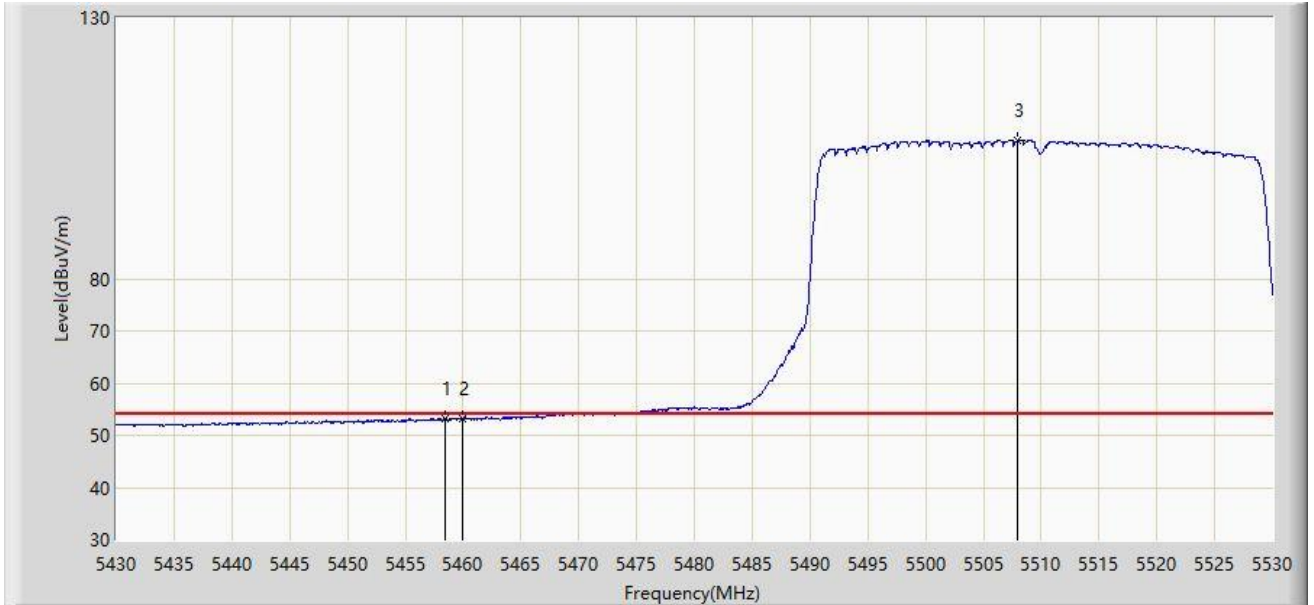


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5458.500	53.197	49.422	-0.803	54.000	3.775	AV
2		5460.000	53.157	49.376	-0.843	54.000	3.782	AV
3		5507.950	106.581	102.500	N/A	N/A	4.081	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:42
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

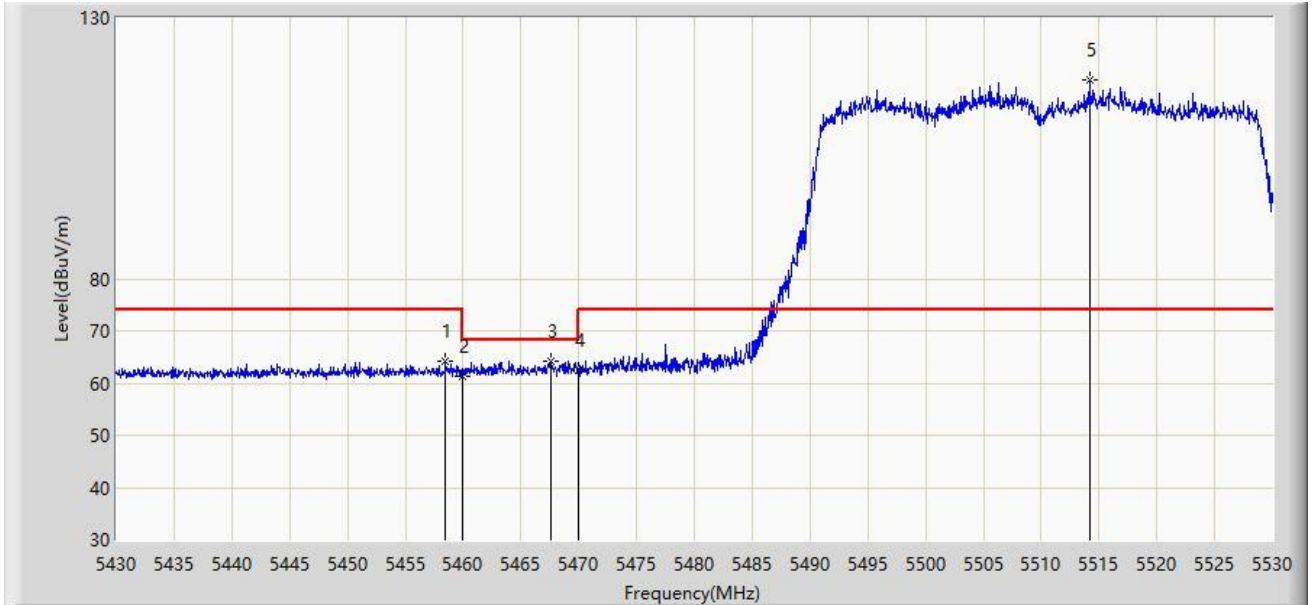


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5458.500	64.217	60.442	-9.783	74.000	3.775	PK
2		5460.000	61.354	57.573	-12.646	74.000	3.782	PK
3	*	5467.550	64.170	60.358	-4.030	68.200	3.813	PK
4		5470.000	62.492	58.670	-5.708	68.200	3.822	PK
5		5514.150	118.173	114.147	N/A	N/A	4.026	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:40
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

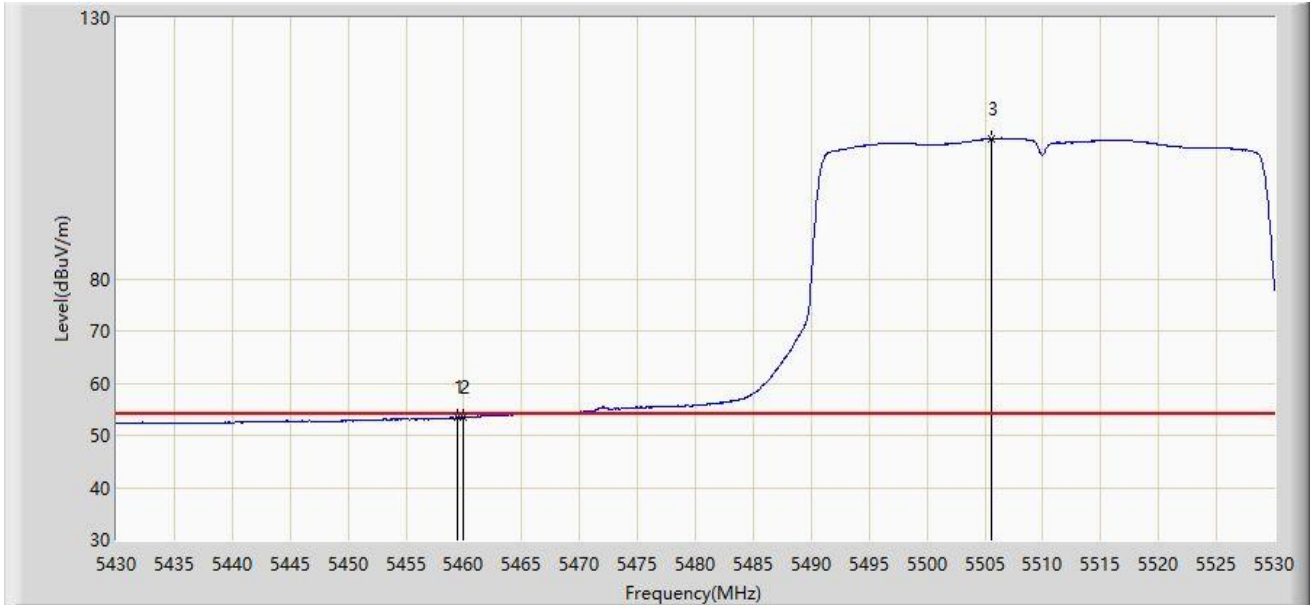

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5459.450	53.379	49.600	-0.621	54.000	3.779	AV
2	*	5460.000	53.396	49.615	-0.604	54.000	3.782	AV
3		5505.600	106.877	102.776	N/A	N/A	4.100	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:54
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

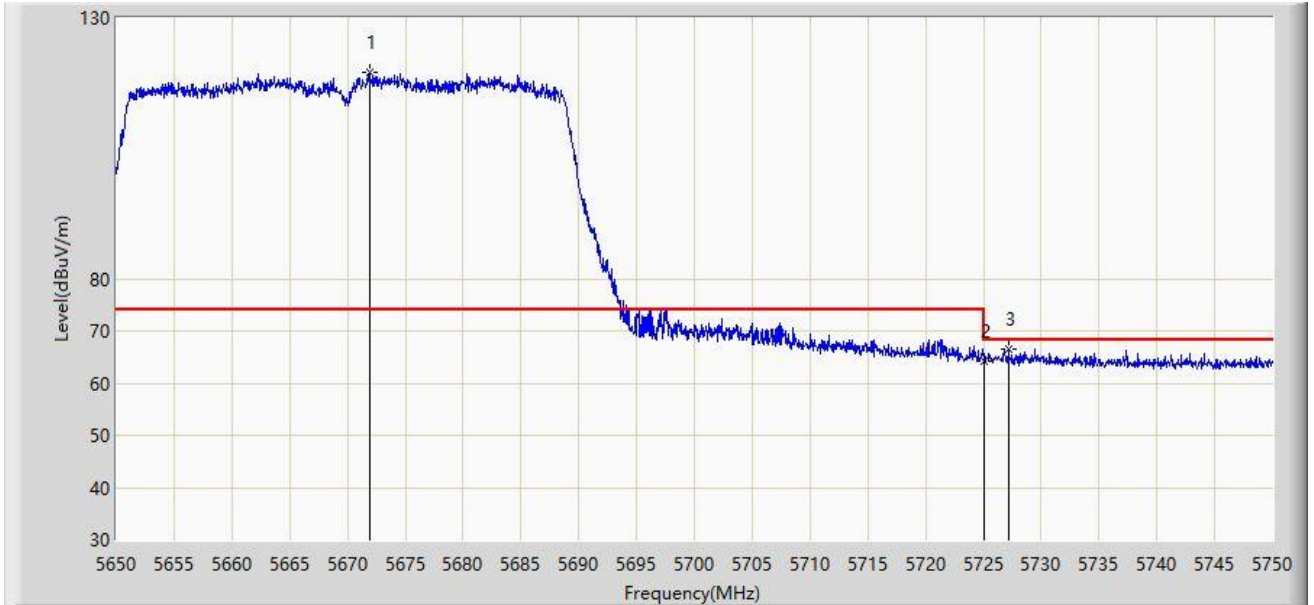


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5671.900	119.474	115.156	N/A	N/A	4.319	PK
2		5725.000	64.188	59.957	-4.012	68.200	4.231	PK
3	*	5727.200	66.547	62.308	-1.653	68.200	4.239	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 01:56
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

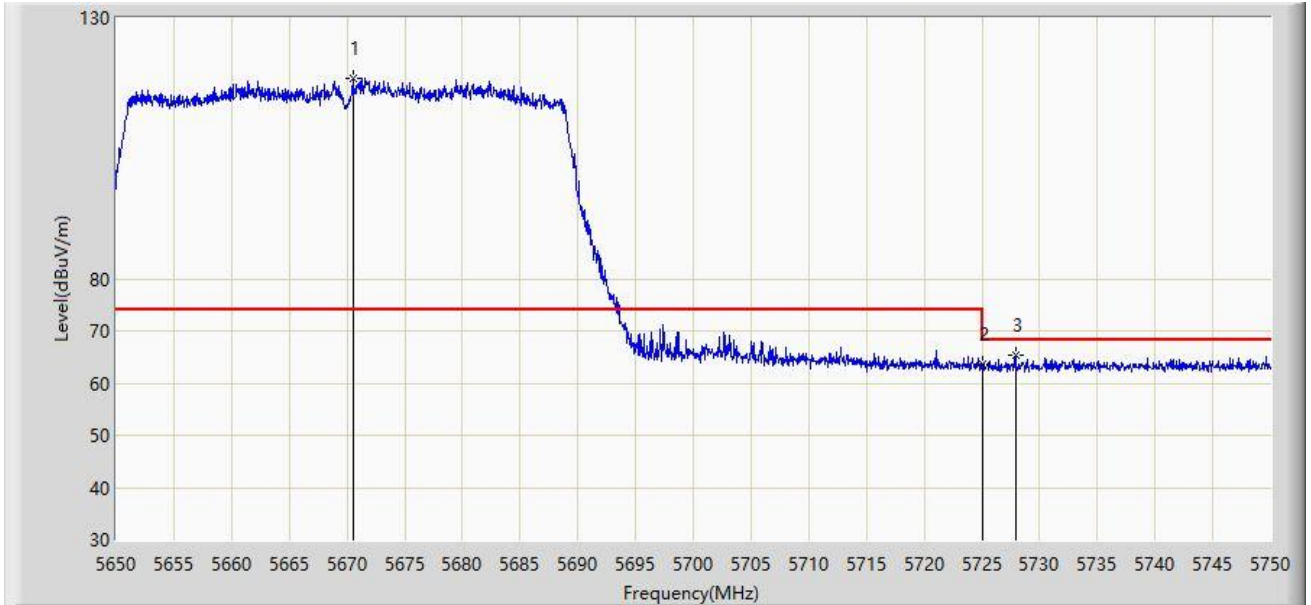

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5670.500	118.283	113.967	N/A	N/A	4.316	PK
2		5725.000	63.569	59.338	-4.631	68.200	4.231	PK
3	*	5727.950	65.220	60.974	-2.980	68.200	4.245	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 01:59
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

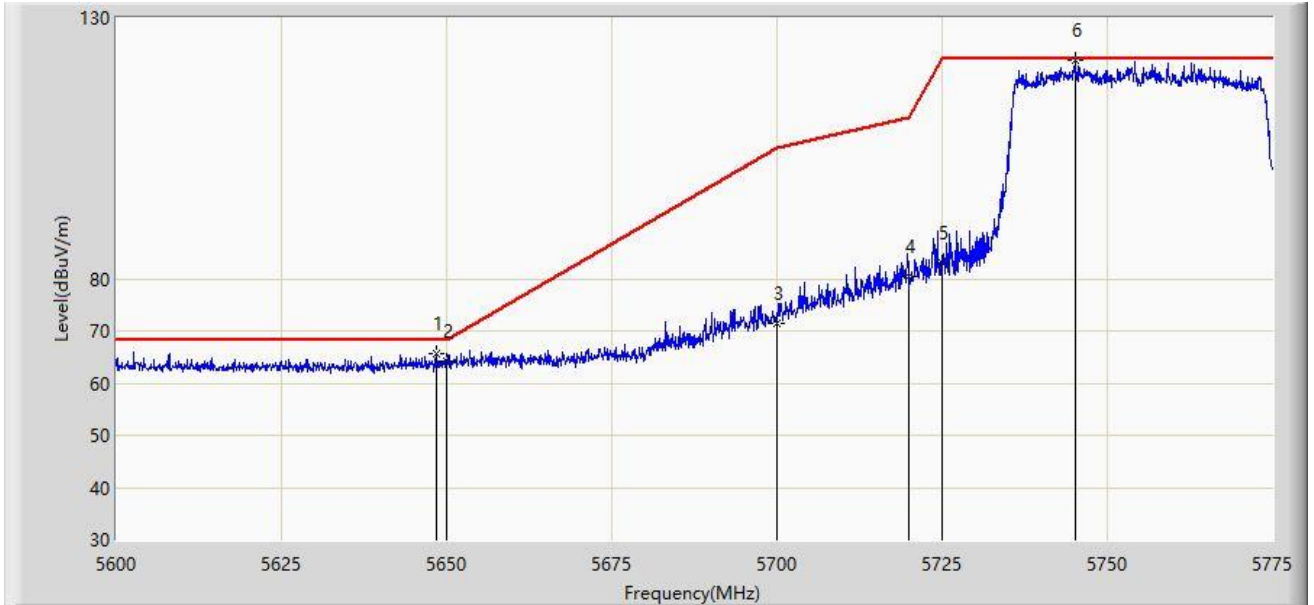


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5648.475	65.627	61.531	-2.573	68.200	4.095	PK
2		5650.000	64.124	59.990	-4.076	68.200	4.134	PK
3		5700.000	71.355	67.181	-33.845	105.200	4.173	PK
4		5720.000	80.313	76.096	-30.487	110.800	4.217	PK
5		5725.000	83.157	78.926	-39.043	122.200	4.231	PK
6		5745.163	121.949	117.548	N/A	N/A	4.401	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:03
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

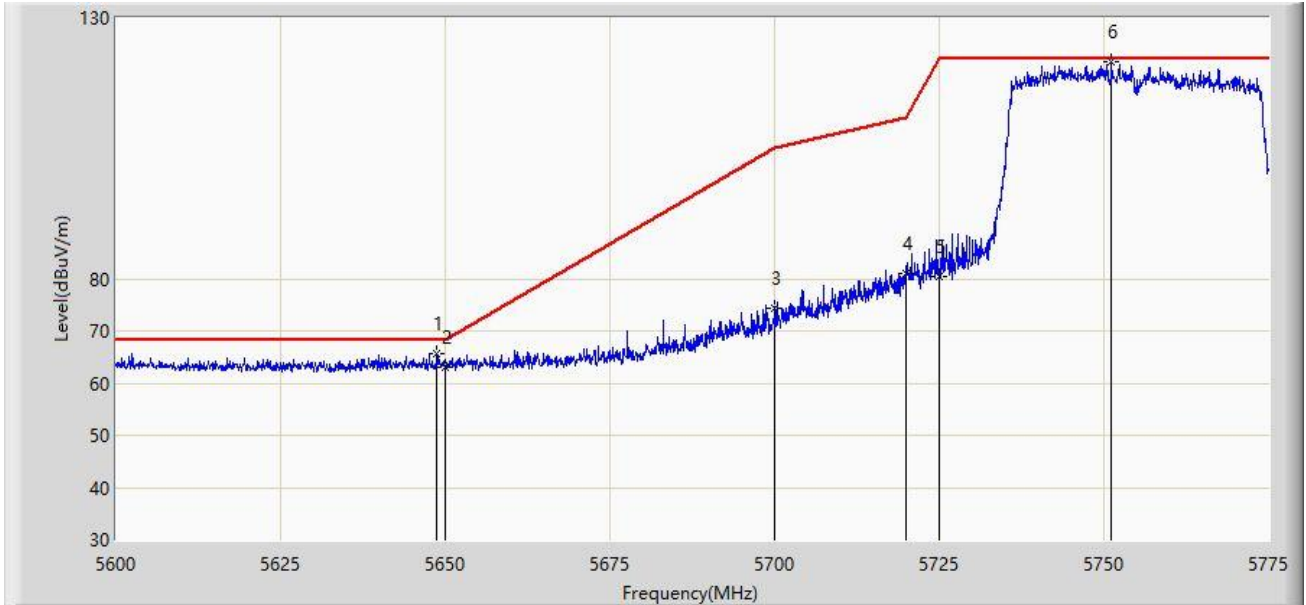


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5648.737	65.570	61.467	-2.630	68.200	4.102	PK
2		5650.000	62.959	58.825	-5.241	68.200	4.134	PK
3		5700.000	74.464	70.290	-30.736	105.200	4.173	PK
4		5720.000	80.983	76.766	-29.817	110.800	4.217	PK
5		5725.000	80.309	76.078	-41.891	122.200	4.231	PK
6		5751.200	121.542	117.136	N/A	N/A	4.406	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:06
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

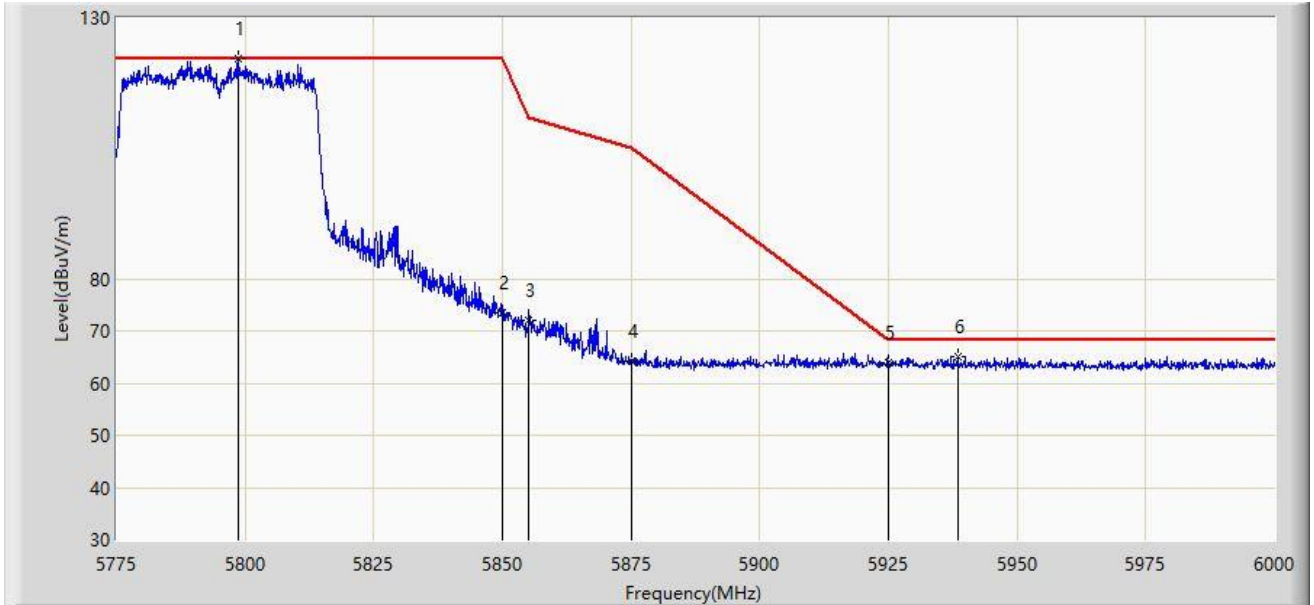


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5798.625	122.131	117.751	N/A	N/A	4.379	PK
2		5850.000	73.434	68.834	-48.766	122.200	4.599	PK
3		5855.000	71.937	67.377	-38.863	110.800	4.560	PK
4		5875.000	64.289	59.826	-40.911	105.200	4.462	PK
5		5925.000	63.779	59.148	-4.421	68.200	4.631	PK
6	*	5938.462	64.957	60.420	-3.243	68.200	4.537	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:08
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

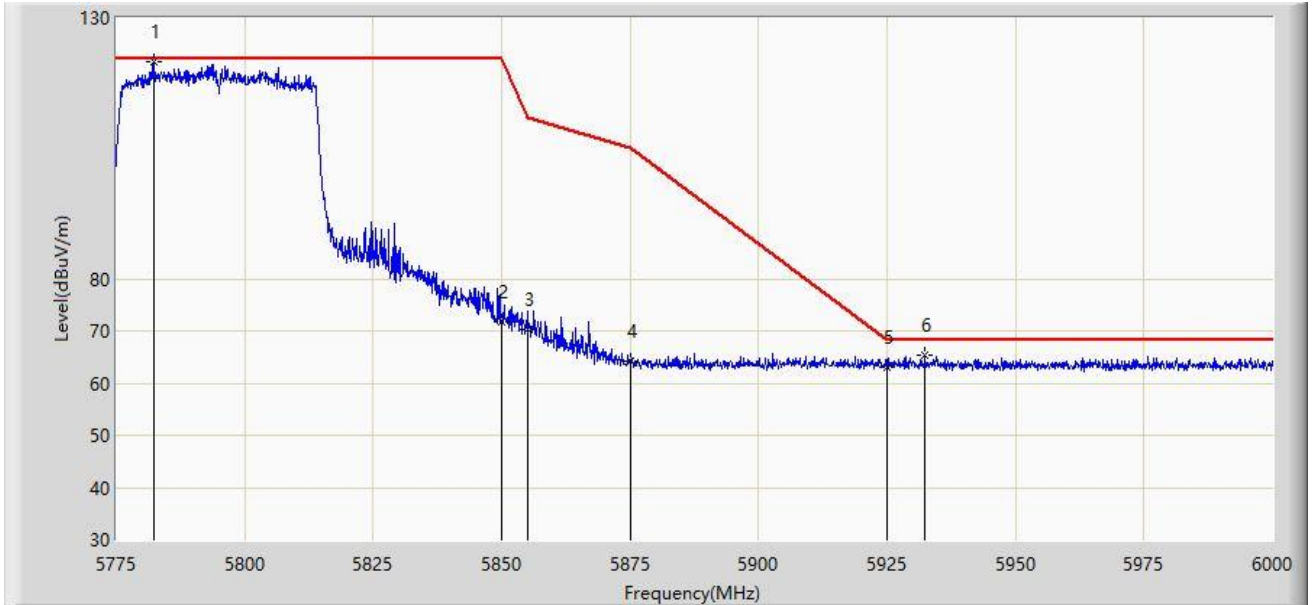

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5782.200	121.516	117.190	N/A	N/A	4.325	PK
2		5850.000	71.749	67.149	-50.451	122.200	4.599	PK
3		5855.000	70.200	65.640	-40.600	110.800	4.560	PK
4		5875.000	64.282	59.819	-40.918	105.200	4.462	PK
5		5925.000	63.171	58.540	-5.029	68.200	4.631	PK
6	*	5932.388	65.406	60.798	-2.794	68.200	4.608	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:19
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

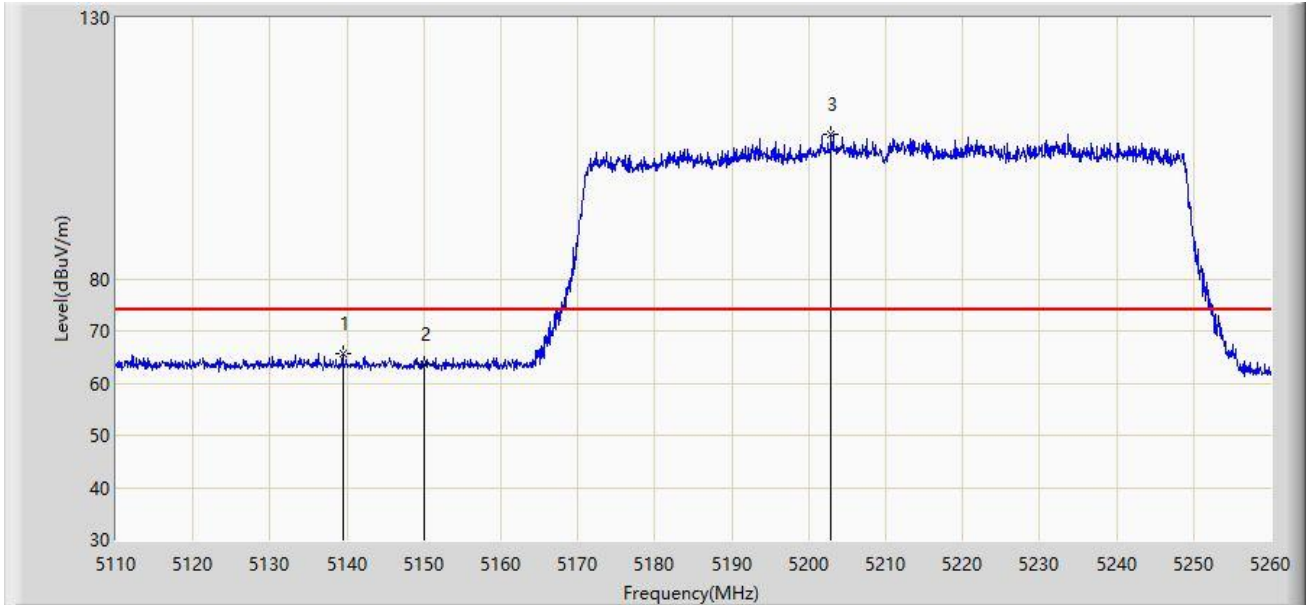

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5139.475	65.550	61.655	-8.450	74.000	3.896	PK
2		5150.000	63.525	59.650	-10.475	74.000	3.876	PK
3		5202.925	107.622	104.085	N/A	N/A	3.538	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:18
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

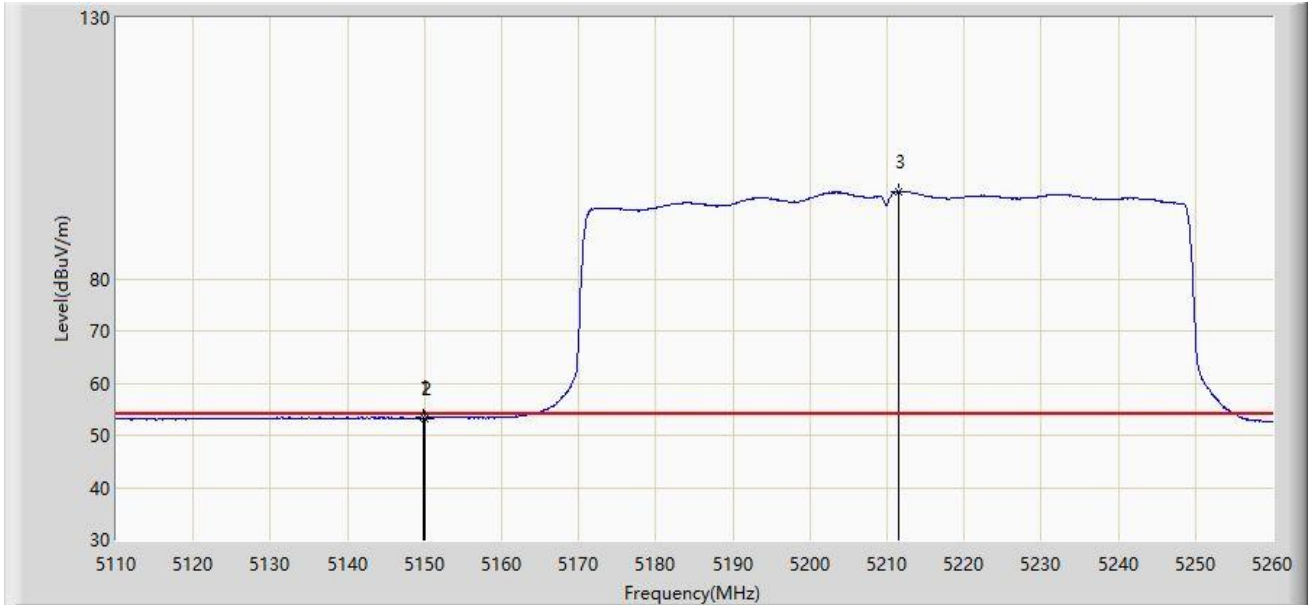


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5149.825	53.402	49.527	-0.598	54.000	3.875	AV
2		5150.000	53.304	49.429	-0.696	54.000	3.876	AV
3		5211.475	96.636	93.063	N/A	N/A	3.573	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:18
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

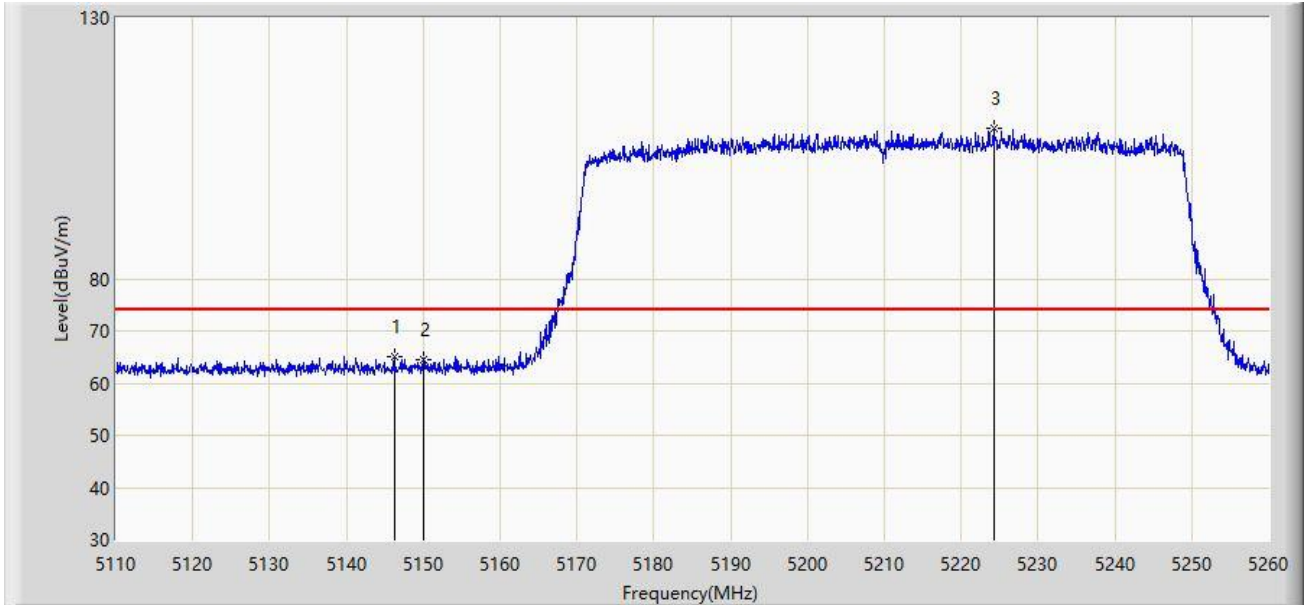

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5146.225	65.052	61.172	-8.948	74.000	3.881	PK
2		5150.000	64.356	60.481	-9.644	74.000	3.876	PK
3		5224.225	108.867	105.255	N/A	N/A	3.612	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:17
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

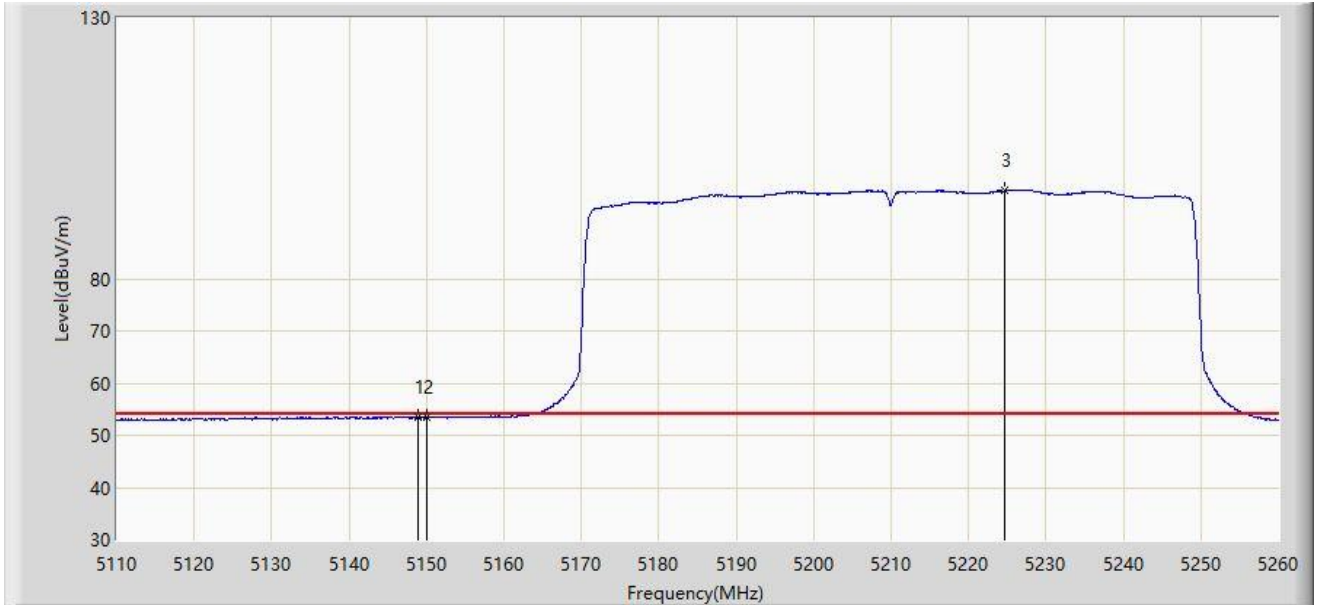

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.000	53.556	49.680	-0.444	54.000	3.875	AV
2		5150.000	53.419	49.544	-0.581	54.000	3.876	AV
3		5224.675	96.932	93.317	N/A	N/A	3.615	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:28
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

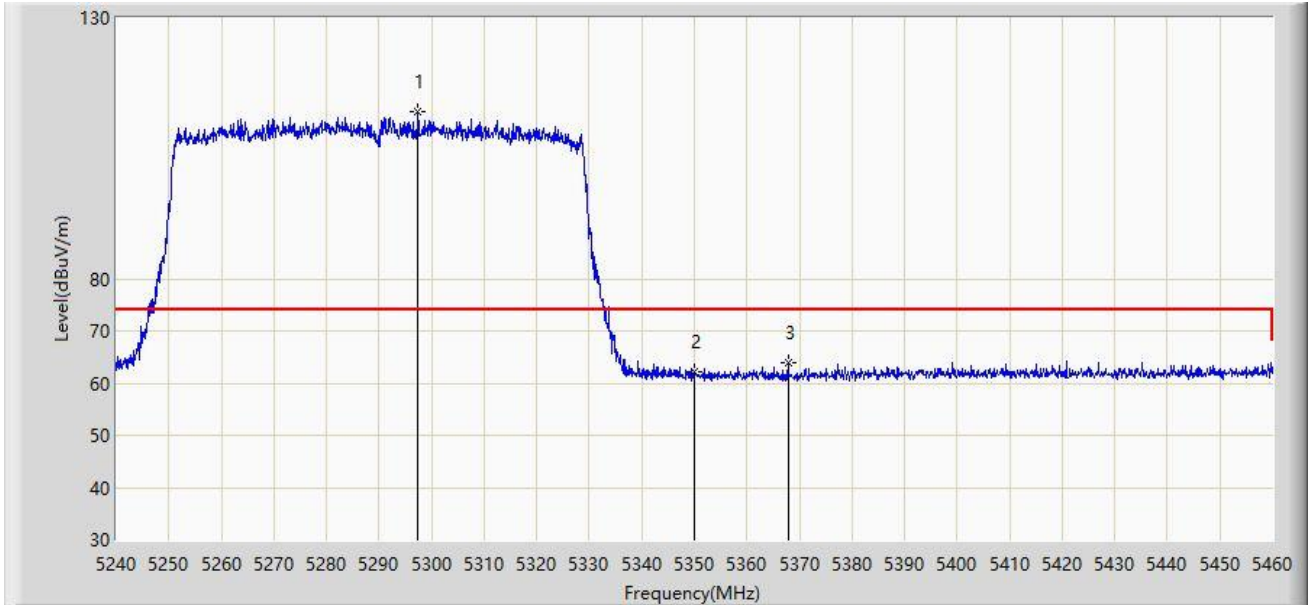

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5297.420	112.011	108.420	N/A	N/A	3.590	PK
2		5350.000	62.263	58.729	-11.737	74.000	3.534	PK
3	*	5367.820	63.840	60.448	-10.160	74.000	3.391	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:26
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

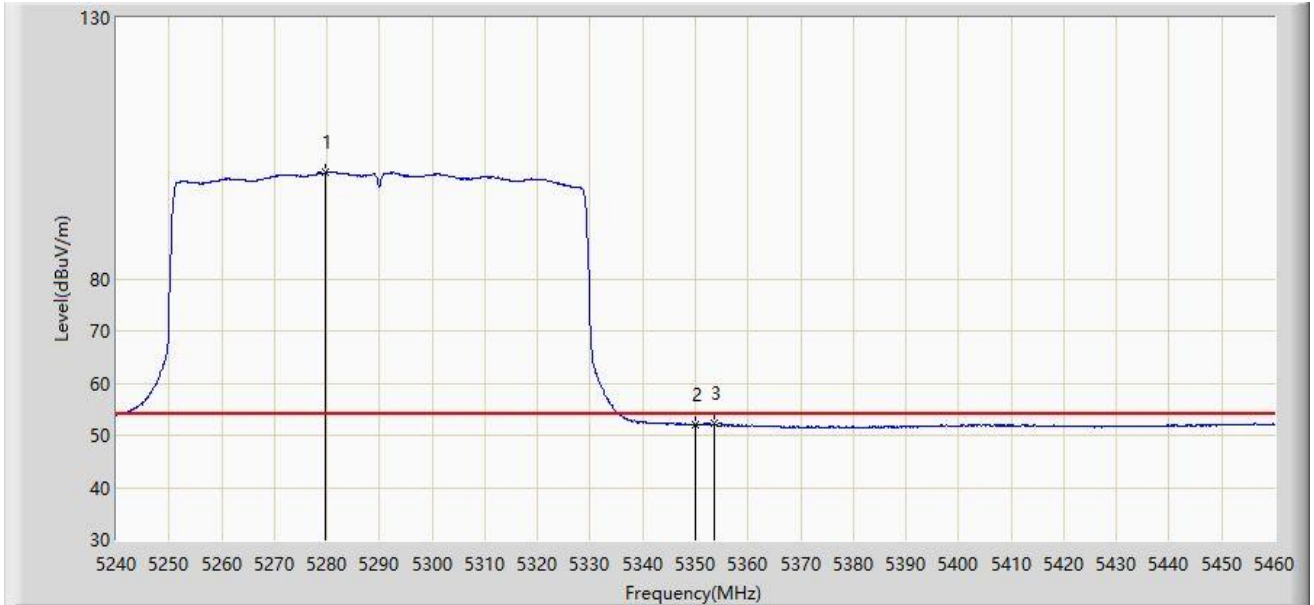


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5279.820	100.342	96.966	N/A	N/A	3.376	AV
2		5350.000	52.068	48.534	-1.932	54.000	3.534	AV
3	*	5353.520	52.202	48.694	-1.798	54.000	3.508	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:26
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

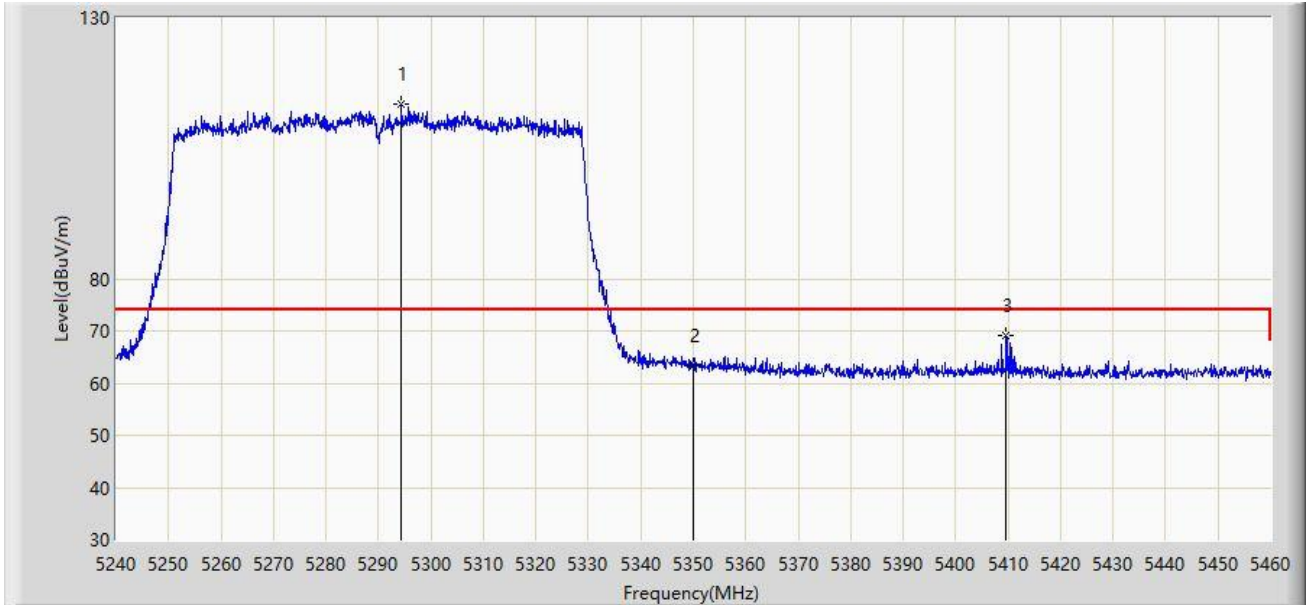

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5294.340	113.410	109.857	N/A	N/A	3.554	PK
2		5350.000	63.429	59.895	-10.571	74.000	3.534	PK
3	*	5409.620	68.992	65.138	-5.008	74.000	3.853	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:25
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

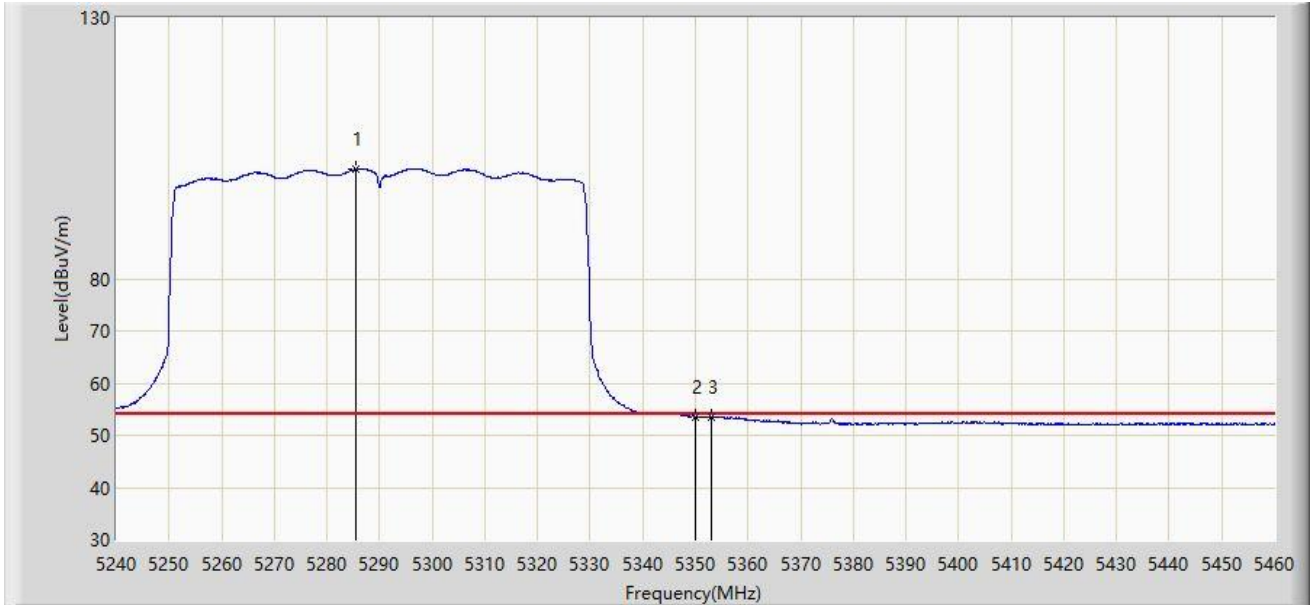


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5285.540	100.969	97.569	N/A	N/A	3.399	AV
2	*	5350.000	53.590	50.056	-0.410	54.000	3.534	AV
3		5352.970	53.555	50.042	-0.445	54.000	3.513	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:41
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

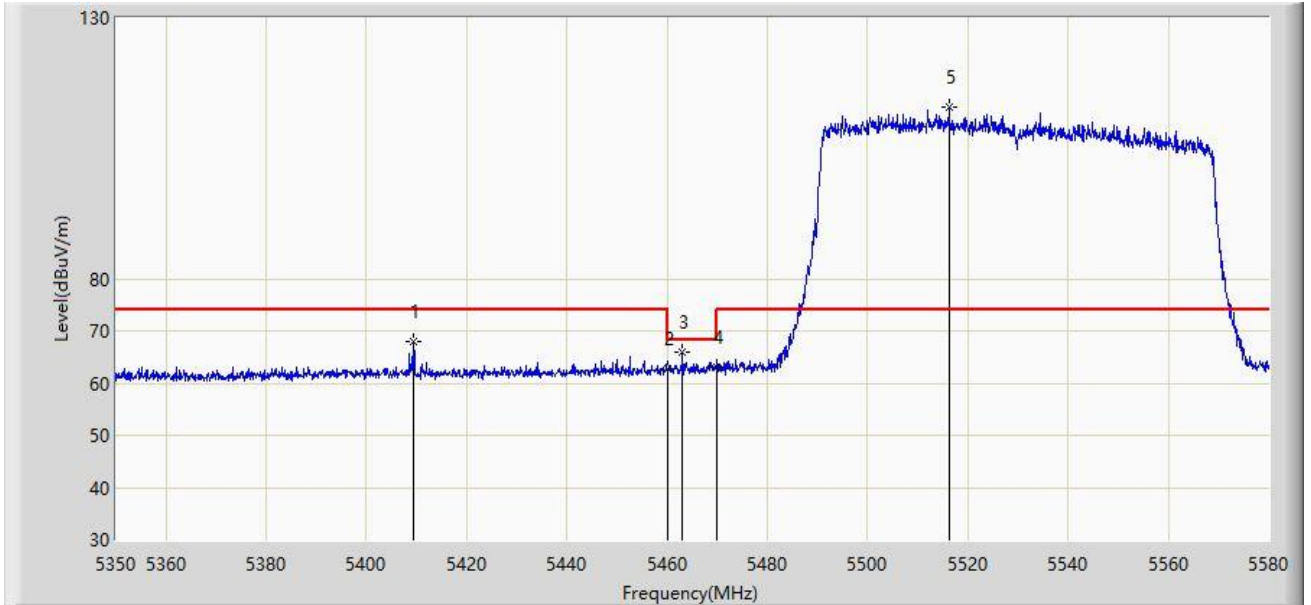


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5409.455	67.987	64.132	-6.013	74.000	3.855	PK
2		5460.000	62.690	58.909	-11.310	74.000	3.782	PK
3	*	5463.045	65.925	62.131	-2.275	68.200	3.793	PK
4		5470.000	63.106	59.284	-5.094	68.200	3.822	PK
5		5516.290	112.901	108.895	N/A	N/A	4.007	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:39
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

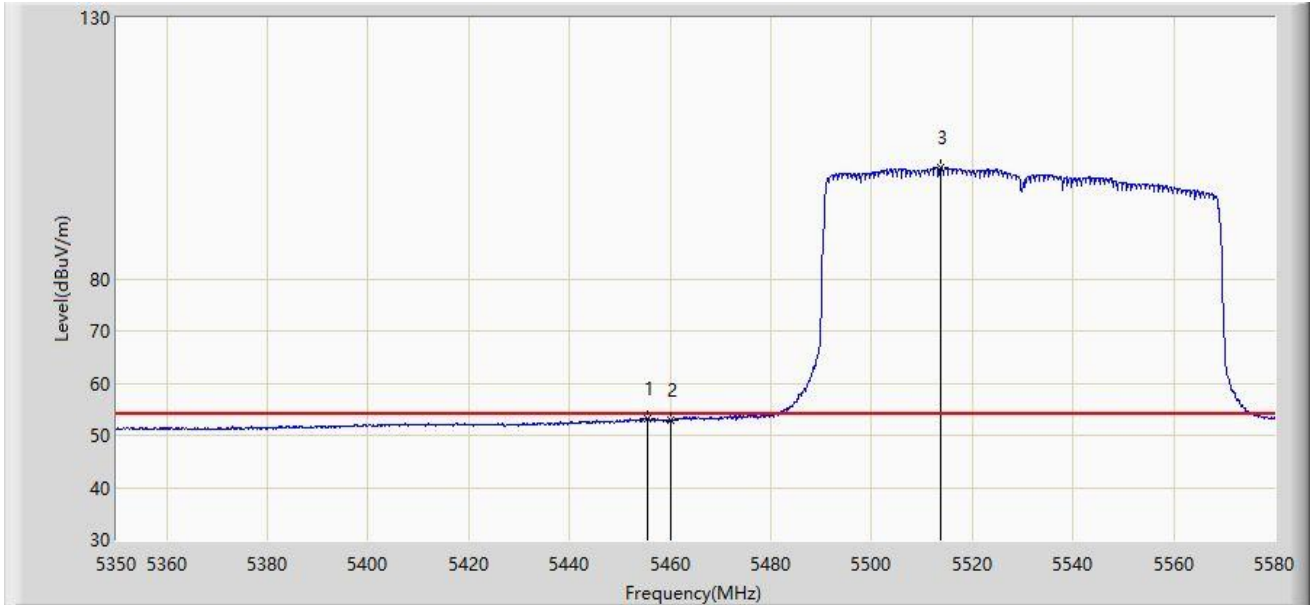


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5455.570	53.292	49.537	-0.708	54.000	3.755	AV
2		5460.000	52.921	49.140	-1.079	54.000	3.782	AV
3		5513.760	101.293	97.263	N/A	N/A	4.029	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:36
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

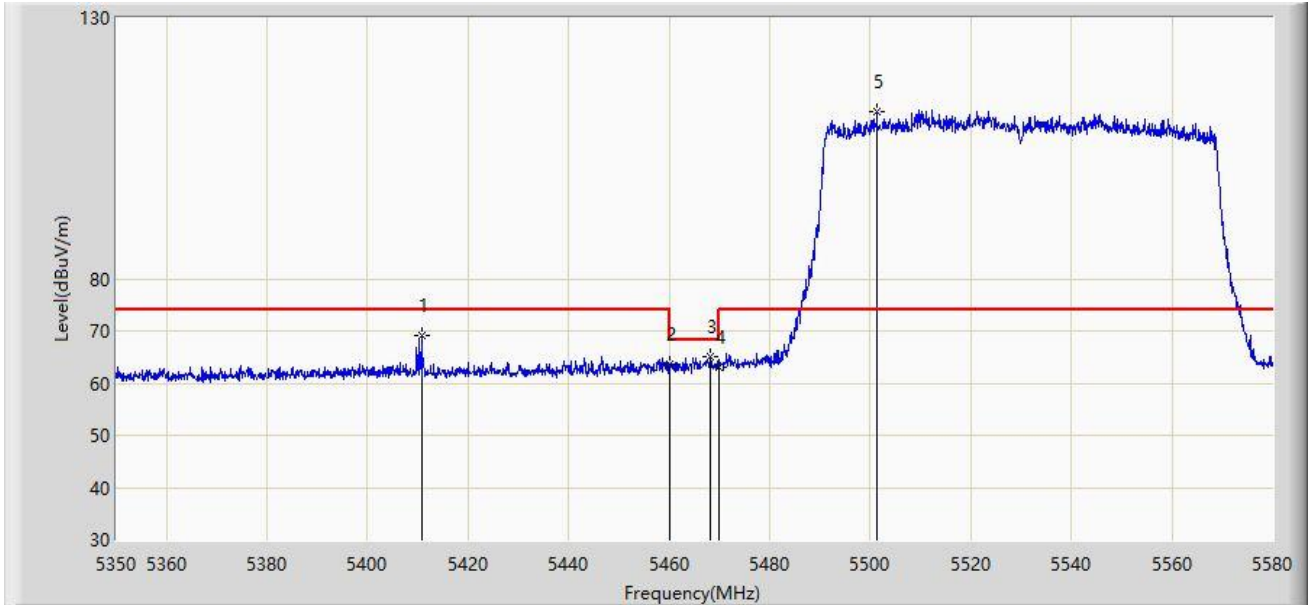

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5410.720	69.213	65.367	-4.787	74.000	3.846	PK
2		5460.000	63.601	59.820	-10.399	74.000	3.782	PK
3	*	5468.220	65.110	61.295	-3.090	68.200	3.815	PK
4		5470.000	63.179	59.357	-5.021	68.200	3.822	PK
5		5501.340	112.151	108.054	N/A	N/A	4.097	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:34
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

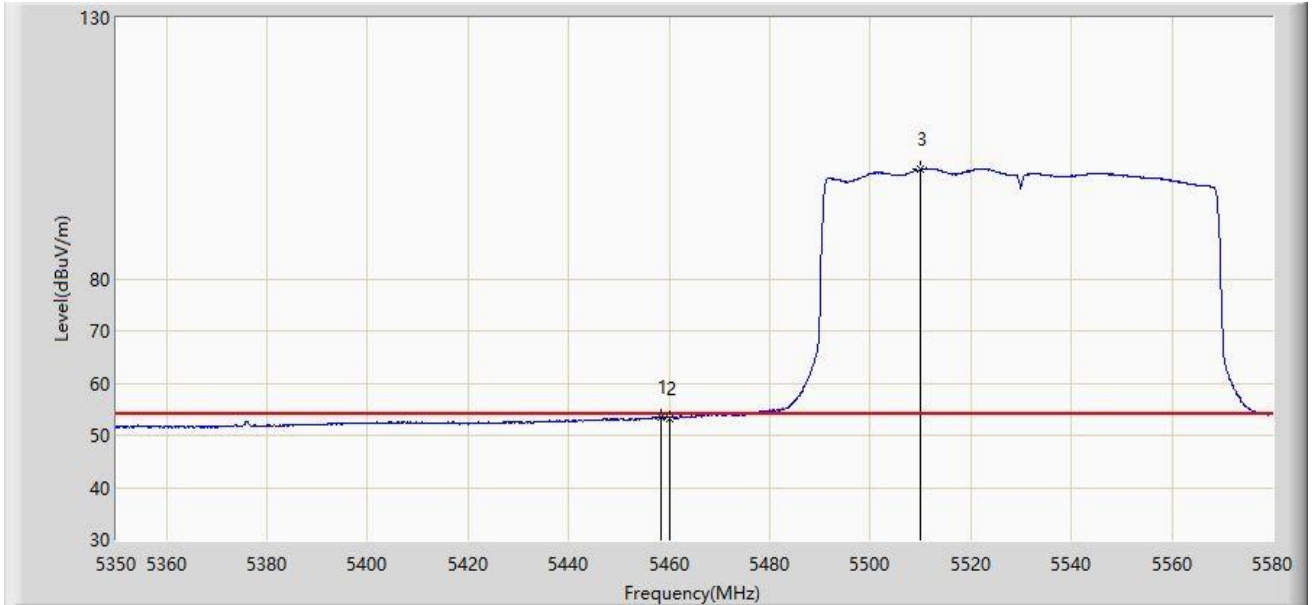

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5458.445	53.537	49.762	-0.463	54.000	3.775	AV
2		5460.000	53.327	49.546	-0.673	54.000	3.782	AV
3		5509.850	100.964	96.899	N/A	N/A	4.065	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:46
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

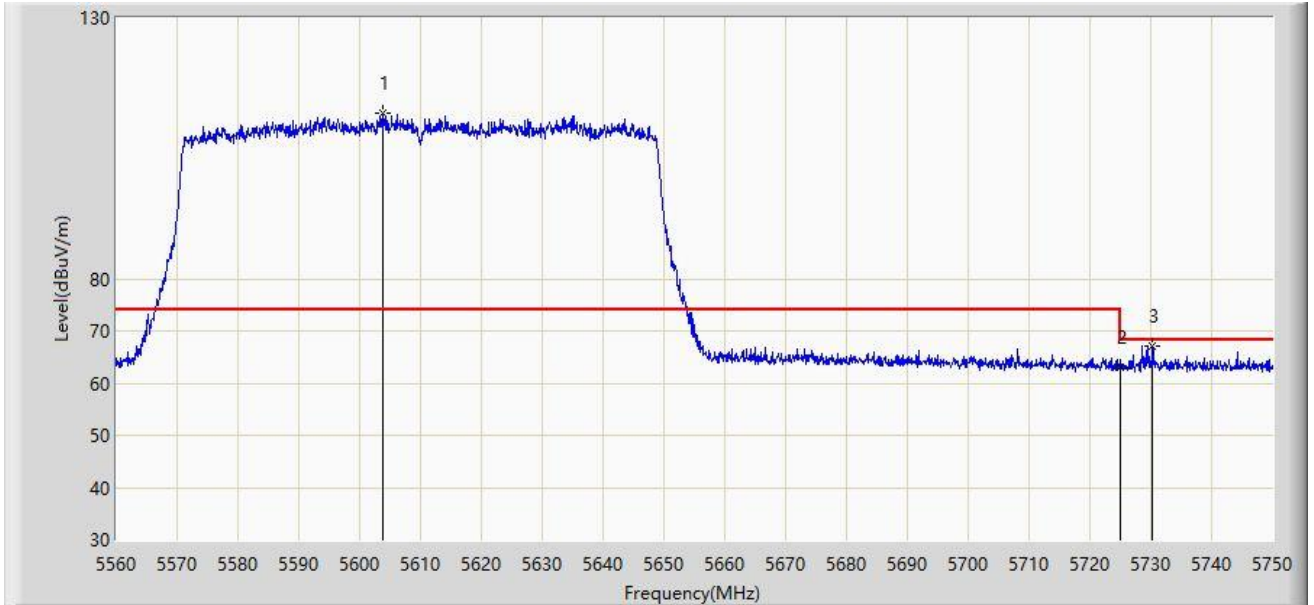


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5603.700	111.604	107.458	N/A	N/A	4.146	PK
2		5725.000	62.963	58.732	-5.237	68.200	4.231	PK
3	*	5730.240	67.173	62.905	-1.027	68.200	4.267	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:48
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

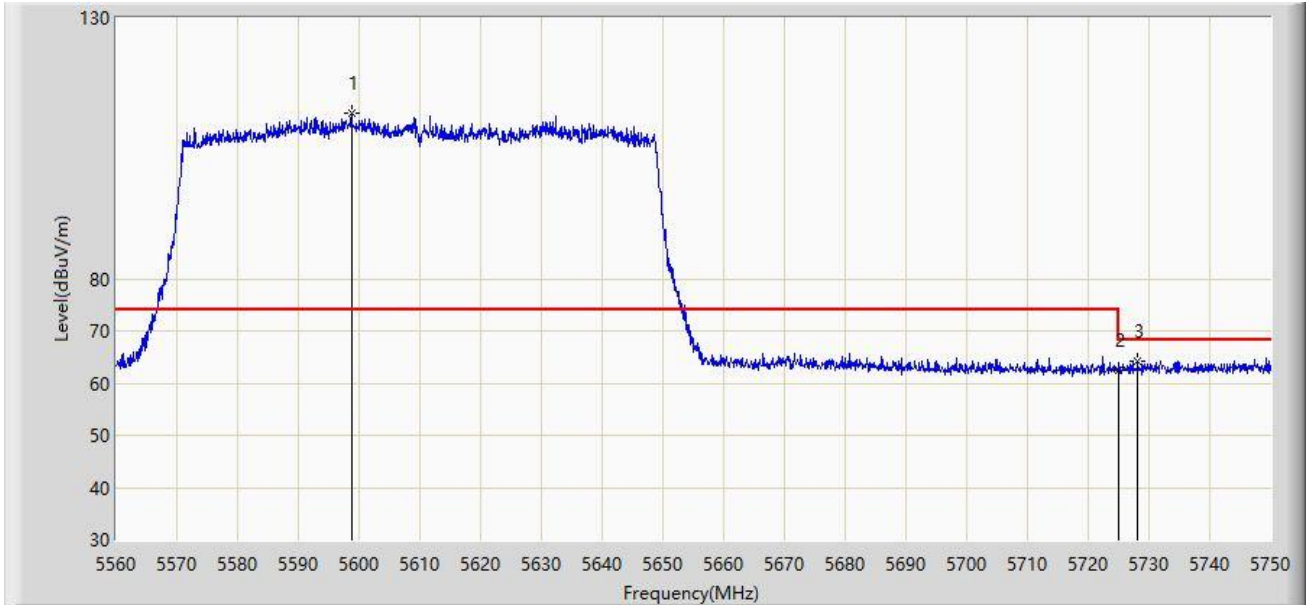


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5598.760	111.711	107.523	N/A	N/A	4.187	PK
2		5725.000	62.549	58.318	-5.651	68.200	4.231	PK
3	*	5728.150	64.115	59.867	-4.085	68.200	4.248	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/12/21 - 02:53
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

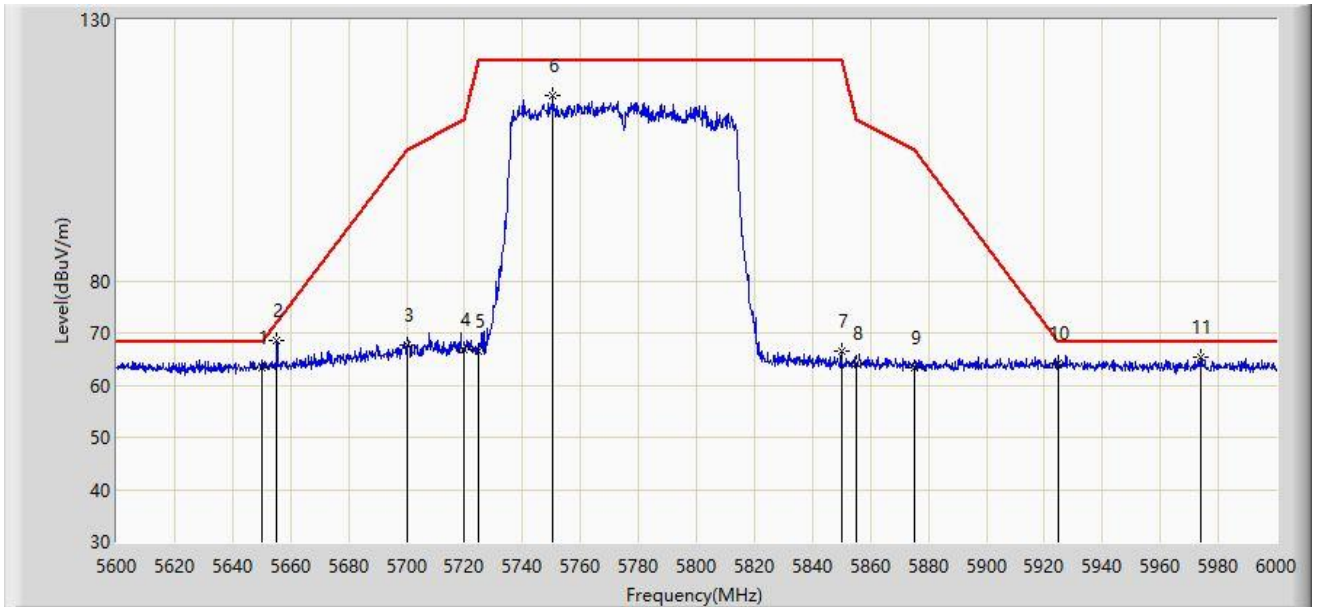

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5650.000	63.393	59.259	-4.807	68.200	4.134	PK
2		5655.200	68.656	64.398	-3.392	72.048	4.258	PK
3		5700.000	67.758	63.584	-37.442	105.200	4.173	PK
4		5720.000	66.897	62.680	-43.903	110.800	4.217	PK
5		5725.000	66.533	62.302	-55.667	122.200	4.231	PK
6		5750.600	115.515	111.109	N/A	N/A	4.406	PK
7		5850.000	66.560	61.960	-55.640	122.200	4.599	PK
8		5855.000	64.246	59.686	-46.554	110.800	4.560	PK
9		5875.000	63.315	58.852	-41.885	105.200	4.462	PK
10		5925.000	64.103	59.472	-4.097	68.200	4.631	PK
11	*	5973.800	65.436	60.874	-2.764	68.200	4.562	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).



Site: WZ-AC1	Time: 2023/12/21 - 02:56
Limit: FCC_5.8G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

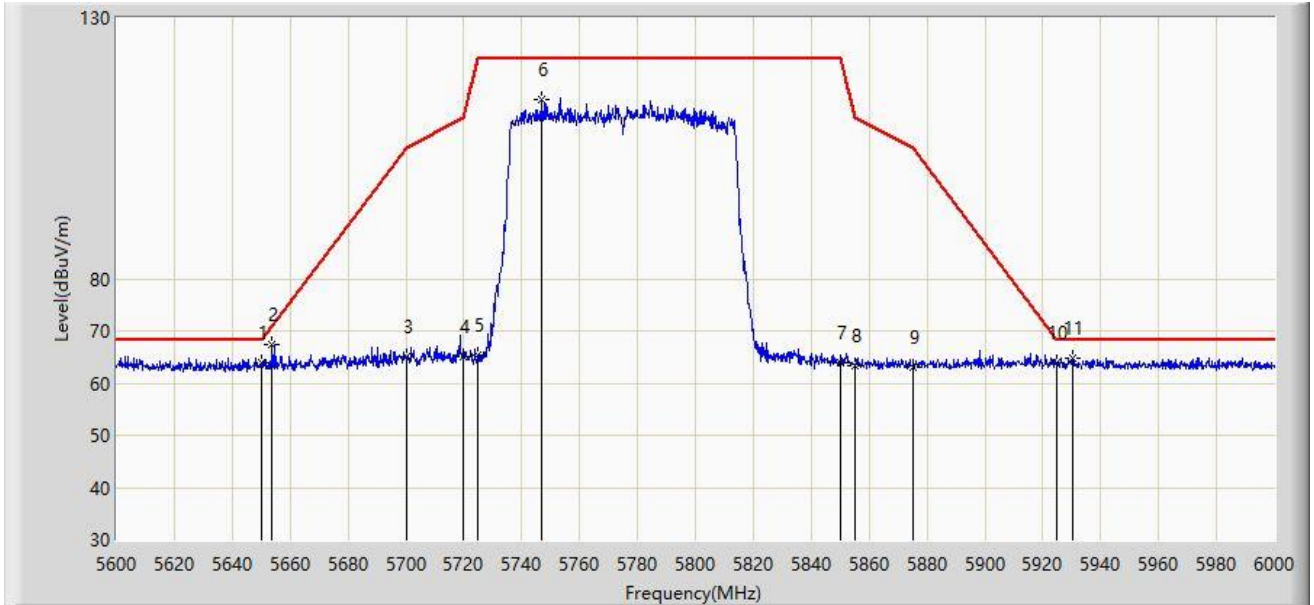

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5650.000	63.807	59.673	-4.393	68.200	4.134	PK
2		5653.800	67.428	63.199	-3.584	71.012	4.229	PK
3		5700.000	65.069	60.895	-40.131	105.200	4.173	PK
4		5720.000	65.029	60.812	-45.771	110.800	4.217	PK
5		5725.000	65.423	61.192	-56.777	122.200	4.231	PK
6		5747.000	114.396	109.993	N/A	N/A	4.403	PK
7		5850.000	64.027	59.427	-58.173	122.200	4.599	PK
8		5855.000	63.431	58.871	-47.369	110.800	4.560	PK
9		5875.000	63.066	58.603	-42.134	105.200	4.462	PK
10		5925.000	63.812	59.181	-4.388	68.200	4.631	PK
11	*	5930.400	64.904	60.273	-3.296	68.200	4.630	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

9. AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-12-21
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz	

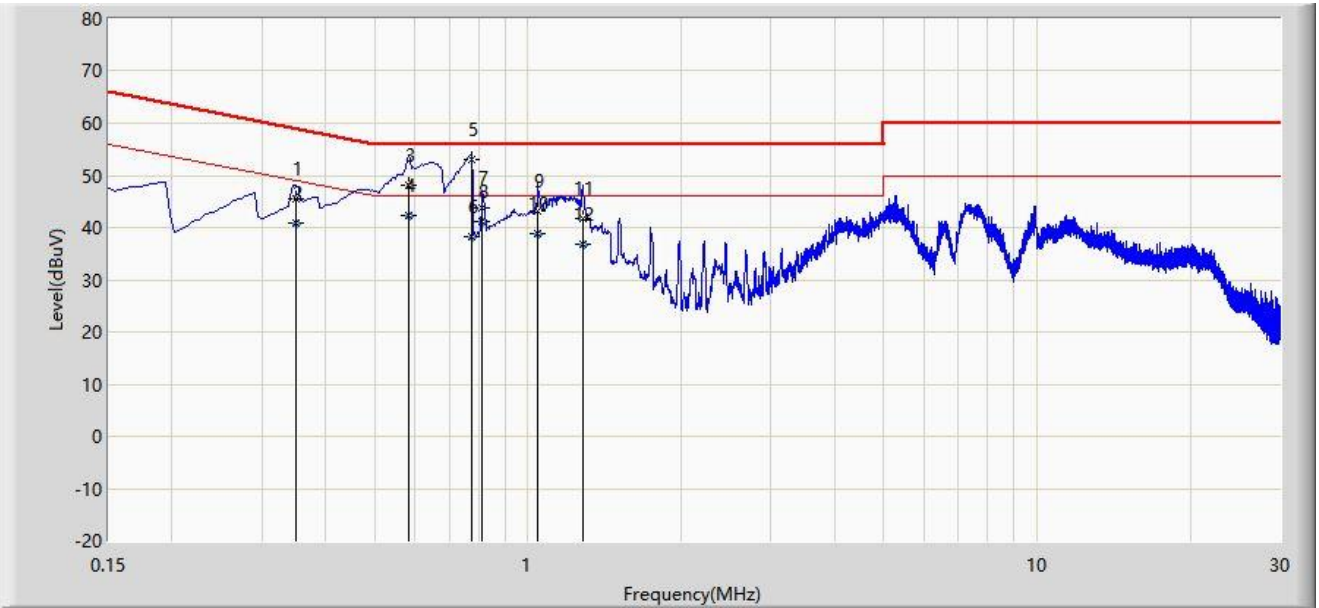

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.350	45.472	35.700	-13.490	58.962	9.773	QP
2		0.350	40.914	31.142	-8.048	48.962	9.773	AV
3		0.582	48.252	38.373	-7.748	56.000	9.878	QP
4		0.582	42.321	32.442	-3.679	46.000	9.878	AV
5	*	0.774	52.946	42.972	-3.054	56.000	9.975	QP
6		0.774	38.387	28.413	-7.613	46.000	9.975	AV
7		0.814	43.745	33.750	-12.255	56.000	9.995	QP
8		0.814	41.087	31.092	-4.913	46.000	9.995	AV
9		1.046	43.055	32.974	-12.945	56.000	10.081	QP
10		1.046	38.732	28.652	-7.268	46.000	10.081	AV
11		1.282	41.836	31.752	-14.164	56.000	10.083	QP
12		1.282	36.814	26.730	-9.186	46.000	10.083	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).



Site: WZ-SR2	Test Date: 2023-12-21
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz	

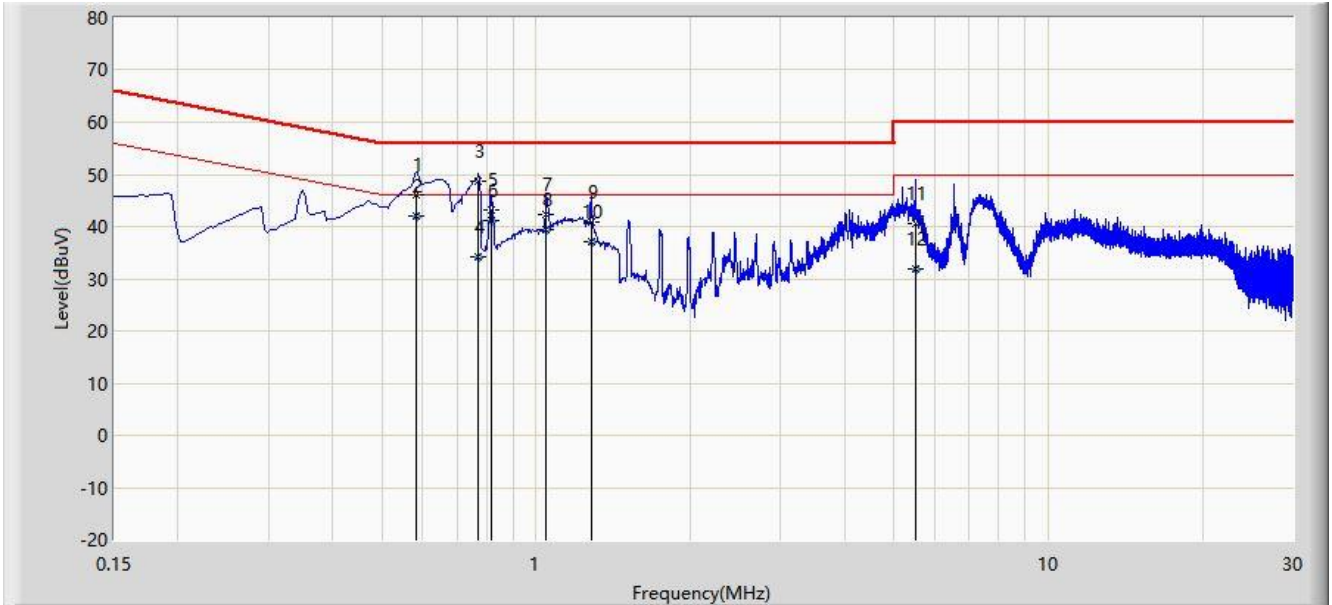

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.582	46.169	36.300	-9.831	56.000	9.868	QP
2	*	0.582	42.050	32.182	-3.950	46.000	9.868	AV
3		0.770	48.656	38.691	-7.344	56.000	9.965	QP
4		0.770	34.295	24.330	-11.705	46.000	9.965	AV
5		0.818	43.098	33.111	-12.902	56.000	9.987	QP
6		0.818	41.044	31.057	-4.956	46.000	9.987	AV
7		1.046	42.310	32.239	-13.690	56.000	10.071	QP
8		1.046	39.449	29.378	-6.551	46.000	10.071	AV
9		1.282	40.816	30.743	-15.184	56.000	10.073	QP
10		1.282	36.994	26.921	-9.006	46.000	10.073	AV
11		5.490	40.502	30.330	-19.498	60.000	10.172	QP
12		5.490	31.916	21.744	-18.084	50.000	10.172	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).