


|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 00:36 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

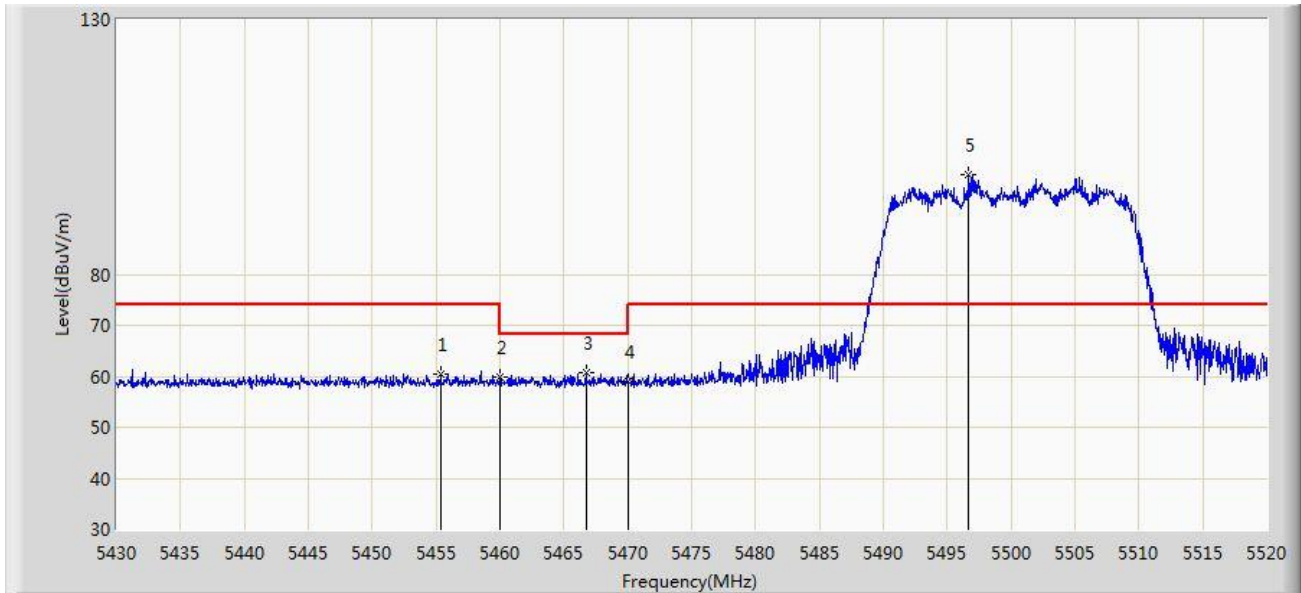


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5455.335        | 60.570                 | 53.936               | -13.430     | 74.000         | 6.634       | PK   |
| 2  |      | 5460.000        | 59.721                 | 53.109               | -14.279     | 74.000         | 6.612       | PK   |
| 3  |      | 5466.720        | 60.598                 | 54.016               | -7.602      | 68.200         | 6.582       | PK   |
| 4  |      | 5470.000        | 58.909                 | 52.342               | -9.291      | 68.200         | 6.567       | PK   |
| 5  | *    | 5496.690        | 99.687                 | 93.004               | N/A         | N/A            | 6.683       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 00:37 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

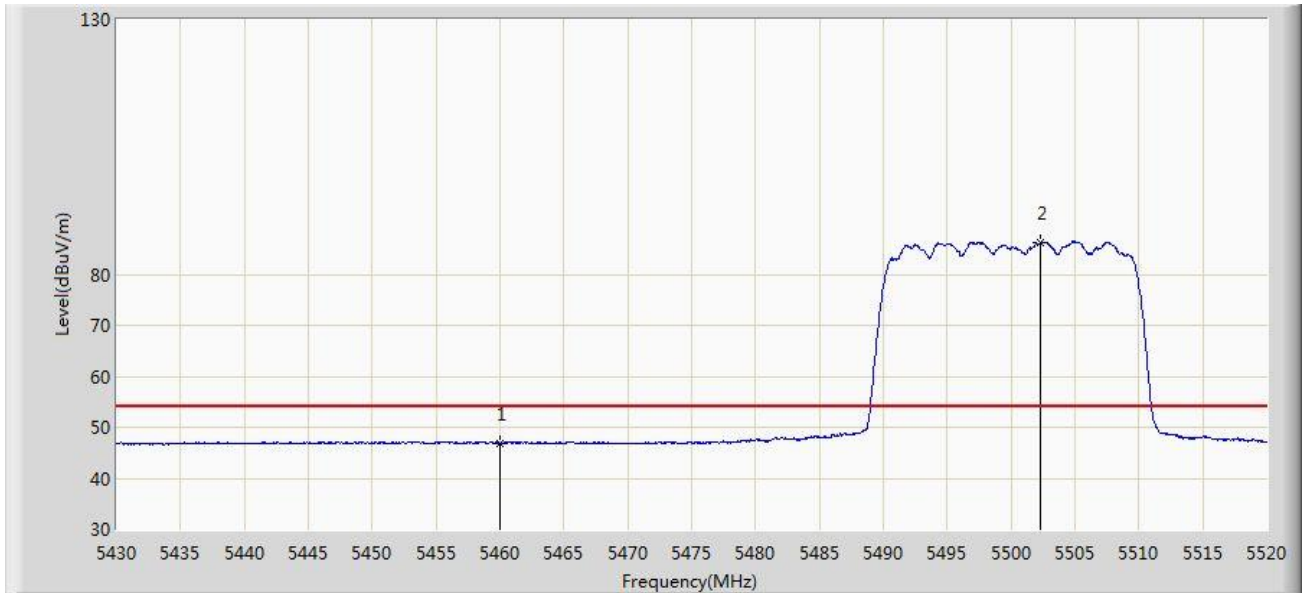


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 46.899                 | 40.287               | -7.101      | 54.000         | 6.612       | AV   |
| 2  | *    | 5502.315        | 86.375                 | 79.651               | N/A         | N/A            | 6.724       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 00:33 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

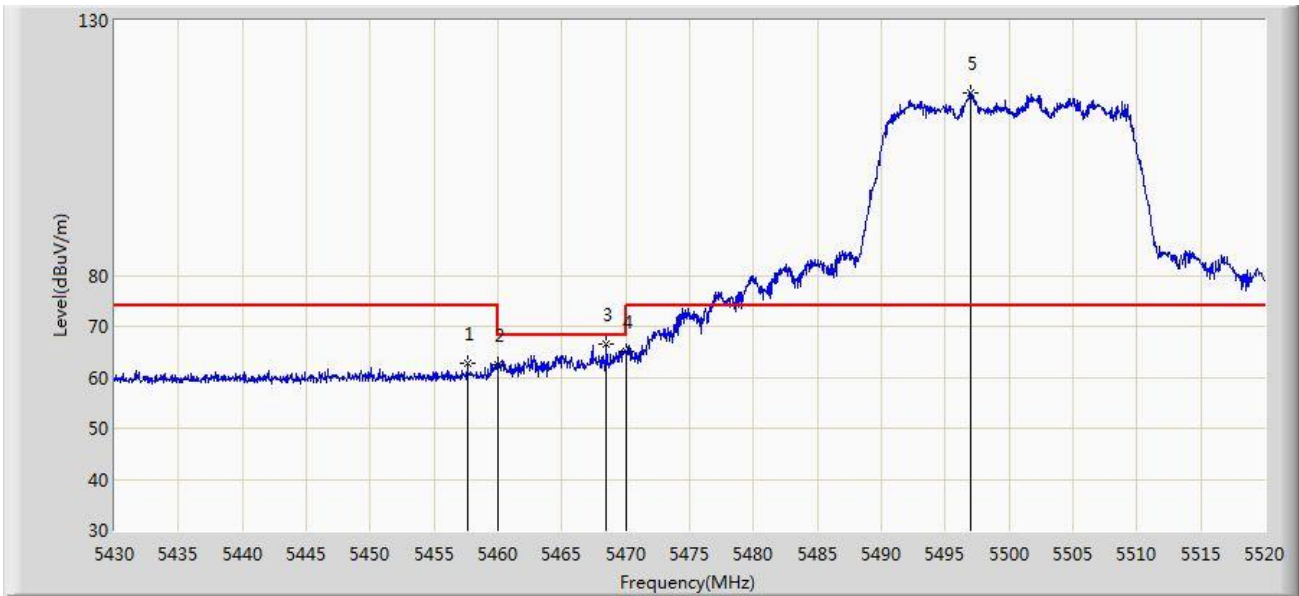


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5457.630        | 62.821                 | 58.687               | -11.179     | 74.000         | 4.134       | PK   |
| 2  |      | 5460.000        | 62.433                 | 58.297               | -11.567     | 74.000         | 4.136       | PK   |
| 3  |      | 5468.475        | 66.556                 | 62.413               | -1.644      | 68.200         | 4.143       | PK   |
| 4  |      | 5470.000        | 65.063                 | 60.919               | -3.137      | 68.200         | 4.144       | PK   |
| 5  | *    | 5497.005        | 115.827                | 111.651              | N/A         | N/A            | 4.176       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 00:35 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

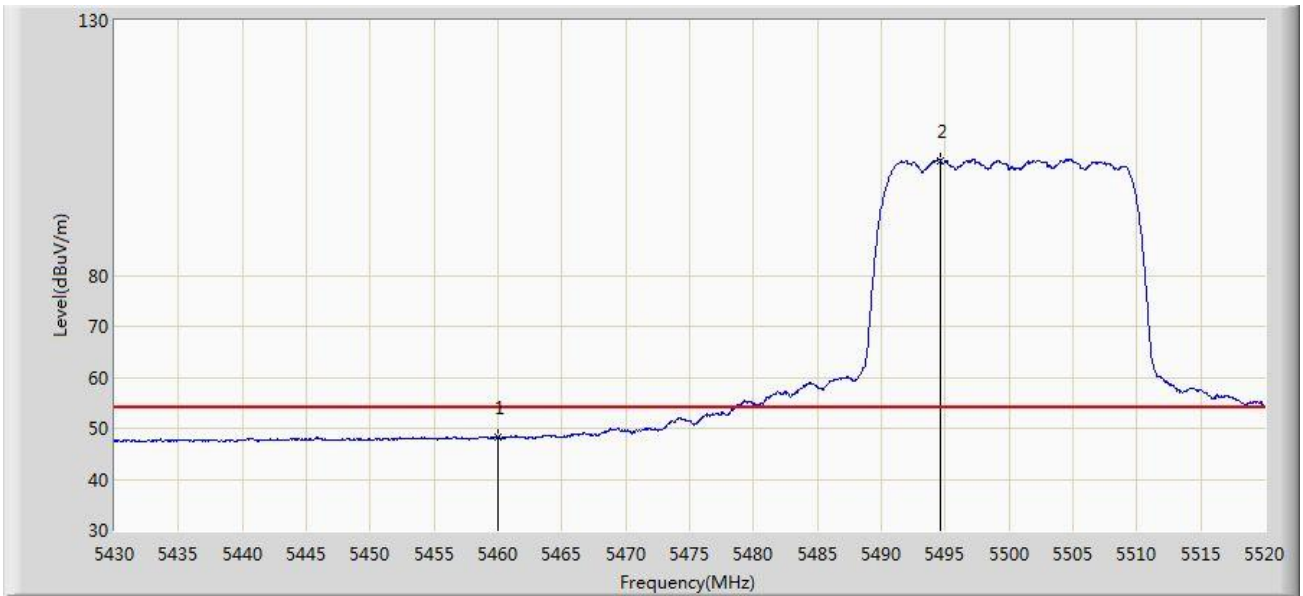


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 48.216                 | 44.080               | -5.784      | 54.000         | 4.136       | AV   |
| 2  | *    | 5494.620        | 102.584                | 98.412               | N/A         | N/A            | 4.171       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 00:42 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE20 at channel 5700MHz Ant 0 + 1 |                          |

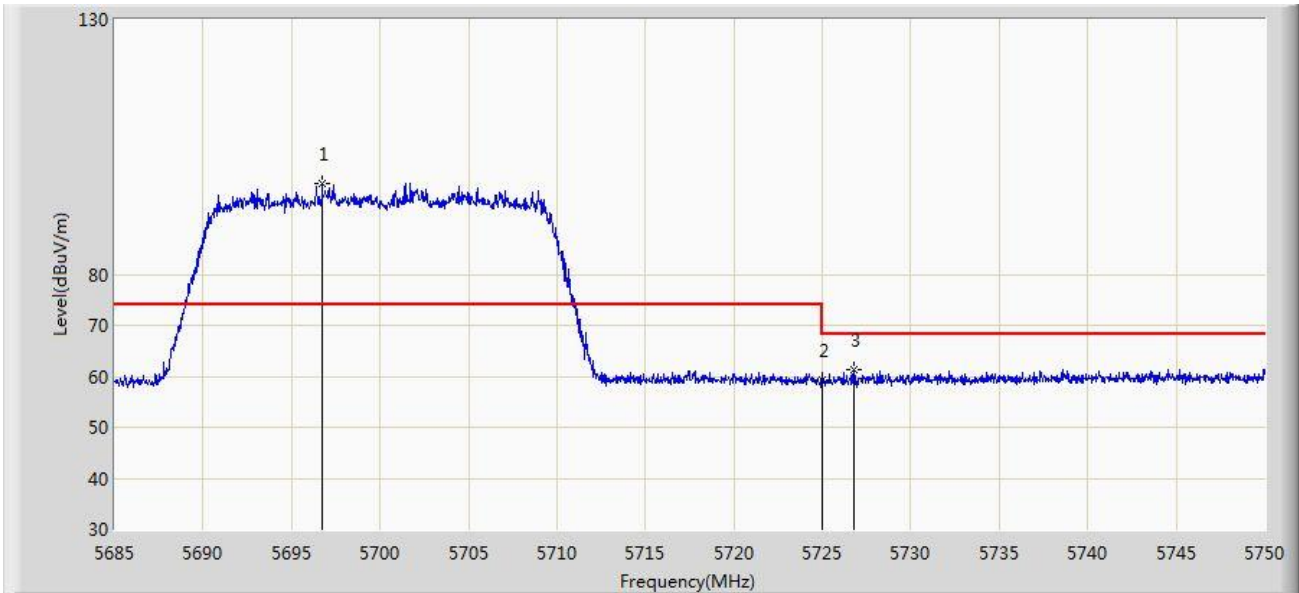


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5696.732        | 97.694                 | 92.769               | N/A         | N/A            | 4.925       | PK   |
| 2  |      | 5725.000        | 59.260                 | 54.226               | -8.940      | 68.200         | 5.034       | PK   |
| 3  |      | 5726.795        | 61.429                 | 56.388               | -6.771      | 68.200         | 5.040       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 00:42 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE20 at channel 5700MHz Ant 0 + 1 |                          |

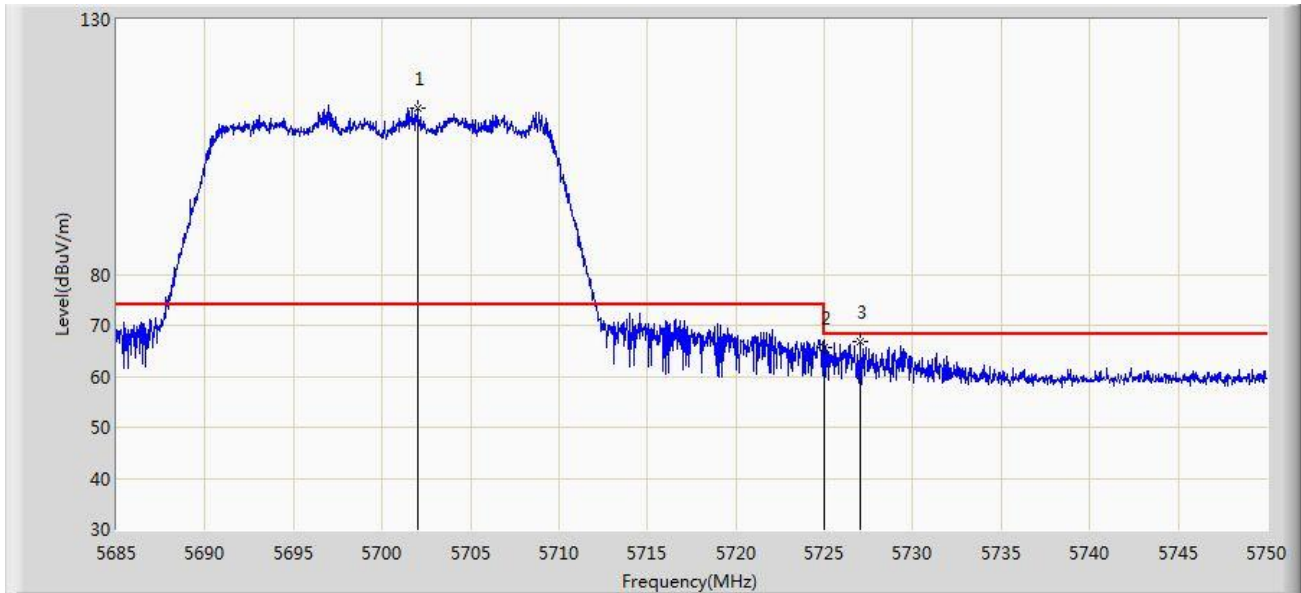


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5701.998        | 112.728                | 107.782              | N/A         | N/A            | 4.946       | PK   |
| 2  |      | 5725.000        | 65.546                 | 60.512               | -2.654      | 68.200         | 5.034       | PK   |
| 3  |      | 5726.990        | 66.906                 | 61.865               | -1.294      | 68.200         | 5.041       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 01:51 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

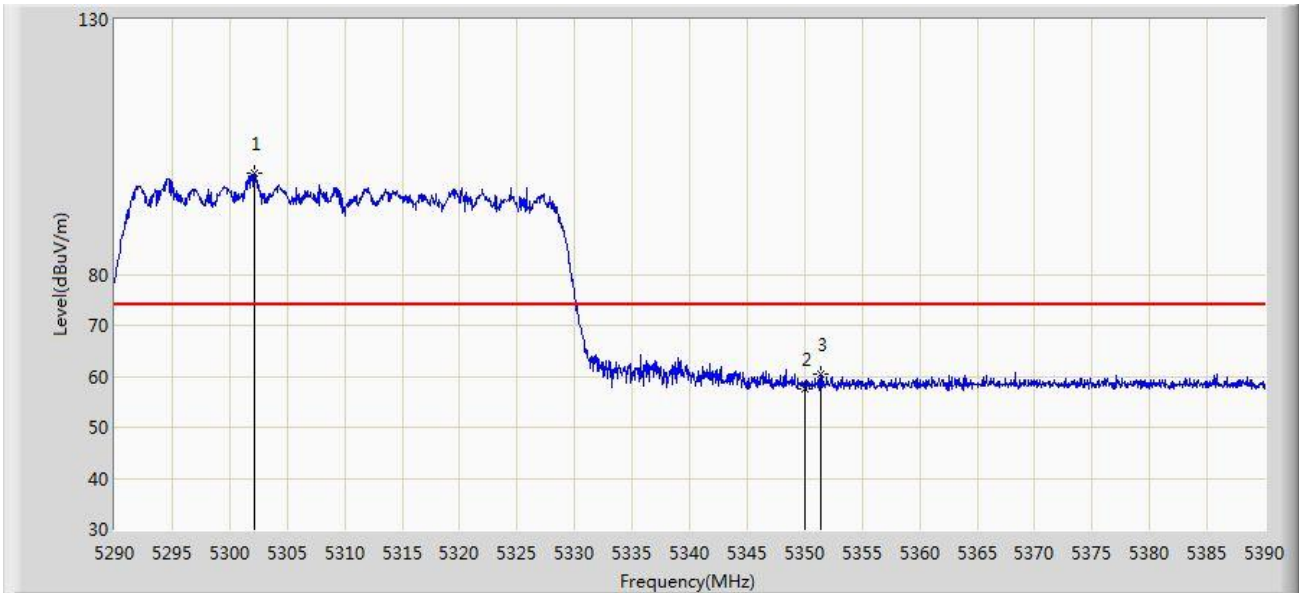


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5302.150        | 99.964                 | 95.961               | N/A         | N/A            | 4.003       | PK   |
| 2  |      | 5350.000        | 57.575                 | 53.531               | -16.425     | 74.000         | 4.044       | PK   |
| 3  |      | 5351.400        | 60.563                 | 56.518               | -13.437     | 74.000         | 4.045       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 01:52 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

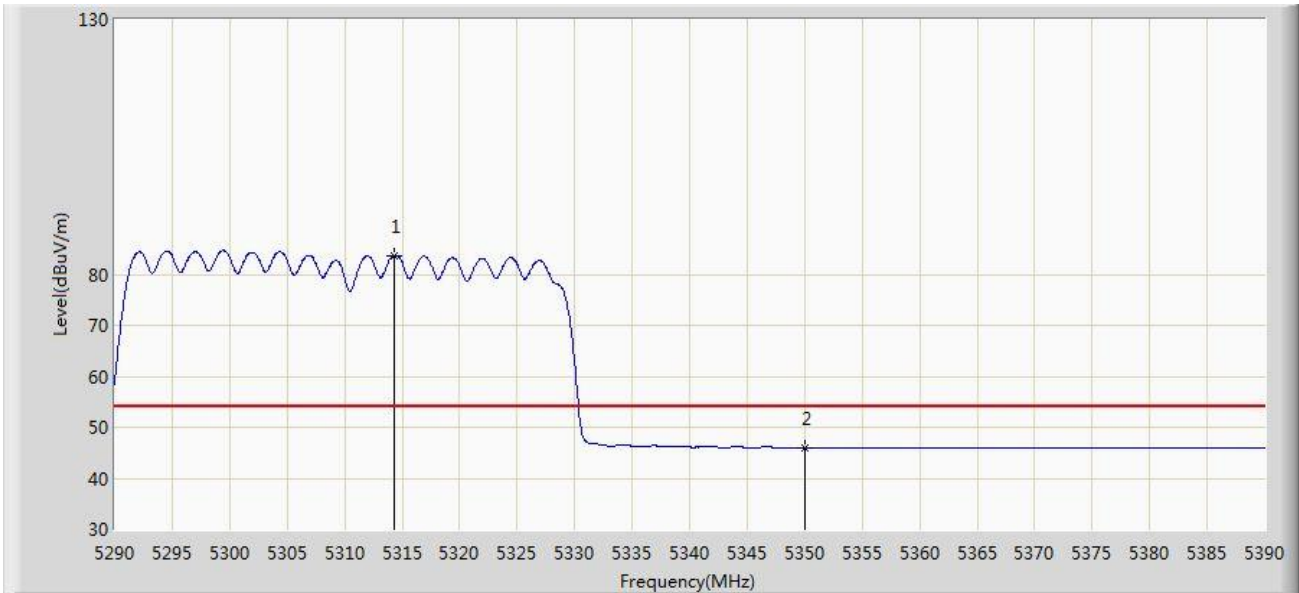


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5314.350        | 83.757                 | 79.743               | N/A         | N/A            | 4.014       | AV   |
| 2  |      | 5350.000        | 45.882                 | 41.838               | -8.118      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 01:47 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

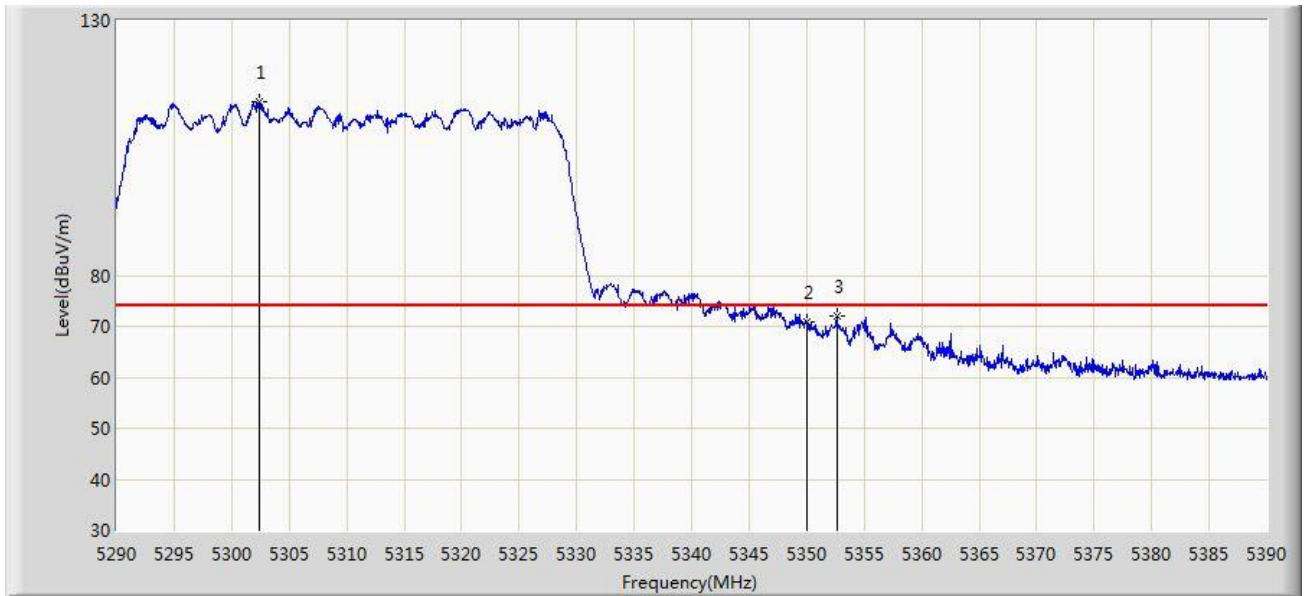


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5302.450        | 114.025                | 110.021              | N/A         | N/A            | 4.004       | PK   |
| 2  |      | 5350.000        | 70.847                 | 66.803               | -3.153      | 74.000         | 4.044       | PK   |
| 3  |      | 5352.600        | 72.106                 | 68.060               | -1.894      | 74.000         | 4.046       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 01:50 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

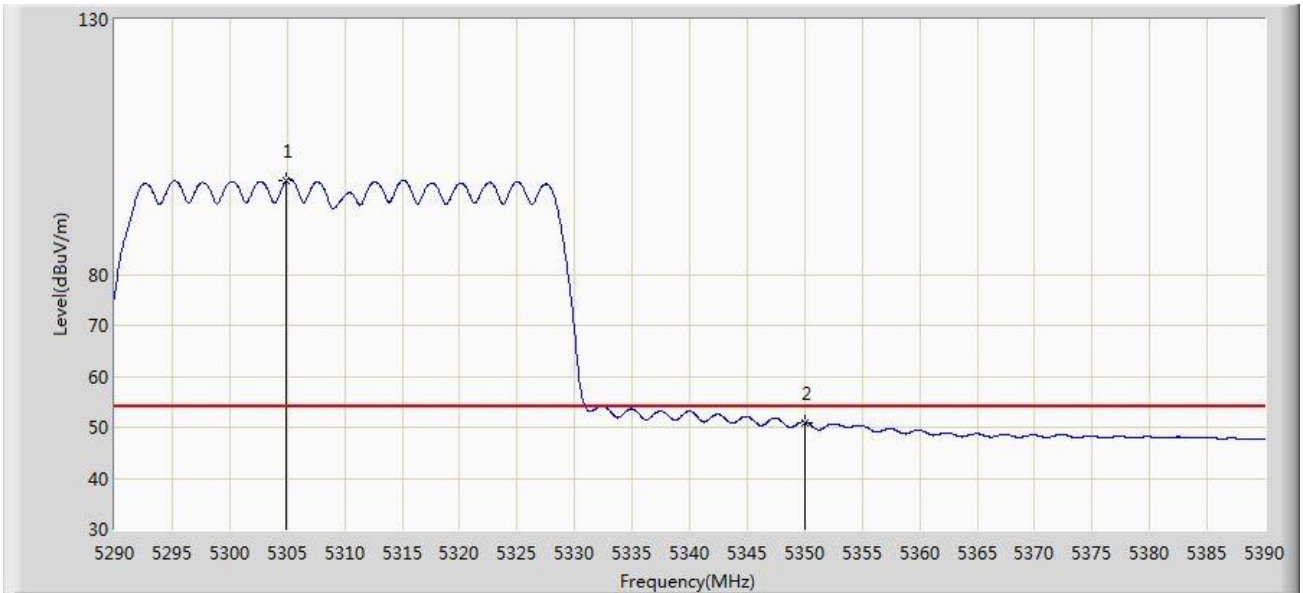


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5304.950        | 98.495                 | 94.489               | N/A         | N/A            | 4.006       | AV   |
| 2  |      | 5350.000        | 51.010                 | 46.966               | -2.990      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 01:57 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

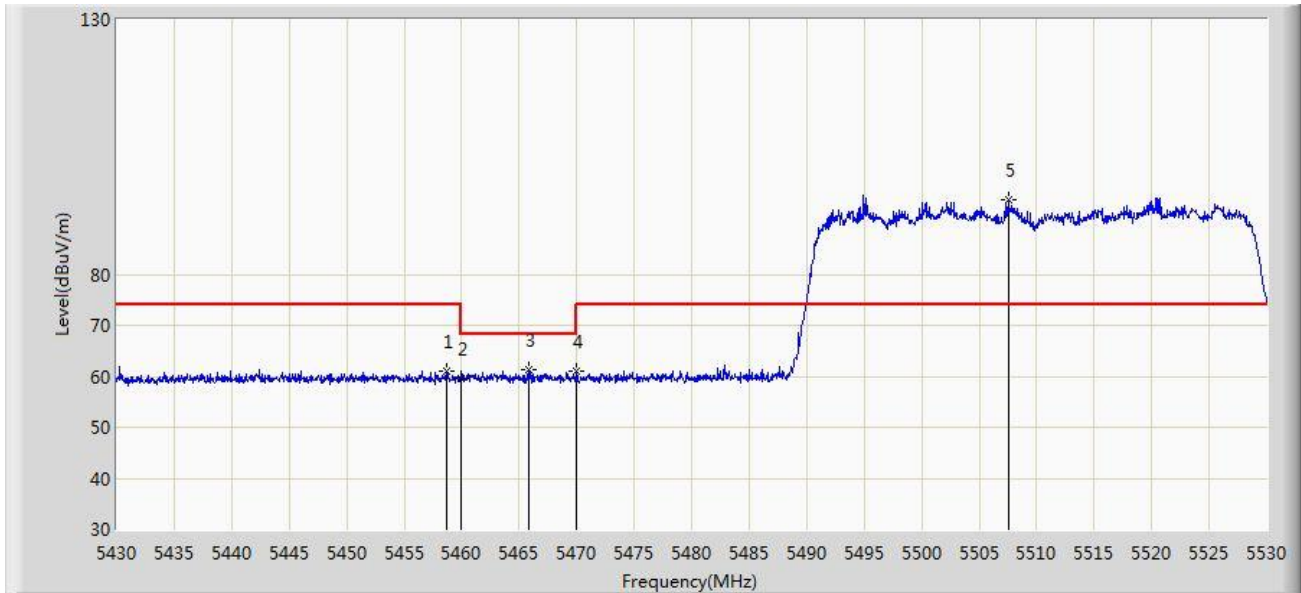


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5458.650        | 61.052                 | 56.917               | -12.948     | 74.000         | 4.135       | PK   |
| 2  |      | 5460.000        | 59.623                 | 55.487               | -14.377     | 74.000         | 4.136       | PK   |
| 3  |      | 5465.800        | 61.247                 | 57.106               | -6.953      | 68.200         | 4.141       | PK   |
| 4  |      | 5470.000        | 60.883                 | 56.739               | -7.317      | 68.200         | 4.144       | PK   |
| 5  | *    | 5507.550        | 94.513                 | 90.314               | N/A         | N/A            | 4.200       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:00 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

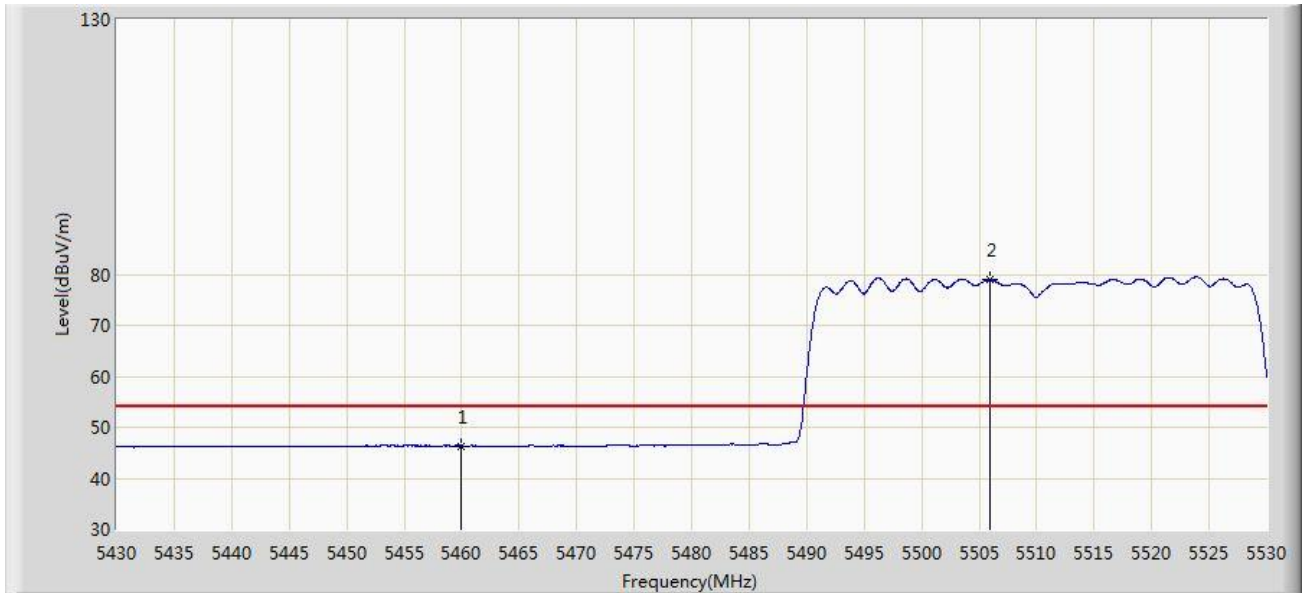


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 46.372                 | 42.236               | -7.628      | 54.000         | 4.136       | AV   |
| 2  | *    | 5506.000        | 78.933                 | 74.740               | N/A         | N/A            | 4.193       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 01:53 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

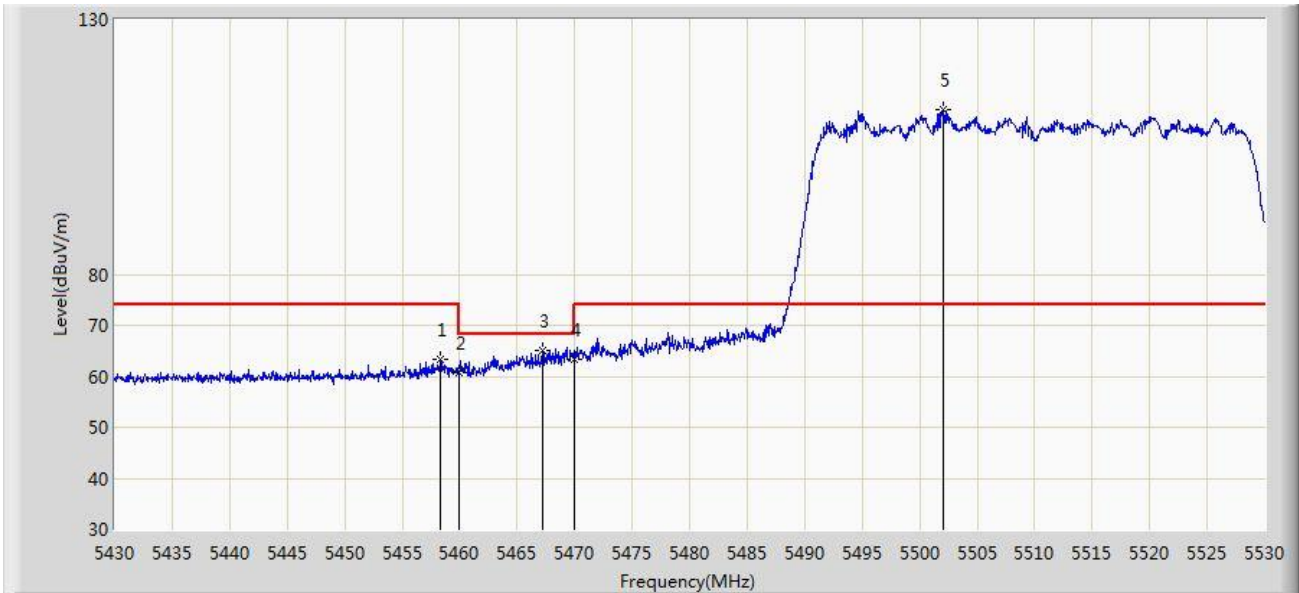


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5458.350        | 63.287                 | 59.152               | -10.713     | 74.000         | 4.135       | PK   |
| 2  |      | 5460.000        | 60.826                 | 56.690               | -13.174     | 74.000         | 4.136       | PK   |
| 3  |      | 5467.200        | 64.954                 | 60.812               | -3.246      | 68.200         | 4.142       | PK   |
| 4  |      | 5470.000        | 63.350                 | 59.206               | -4.850      | 68.200         | 4.144       | PK   |
| 5  | *    | 5502.100        | 112.458                | 108.273              | N/A         | N/A            | 4.185       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 01:56 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

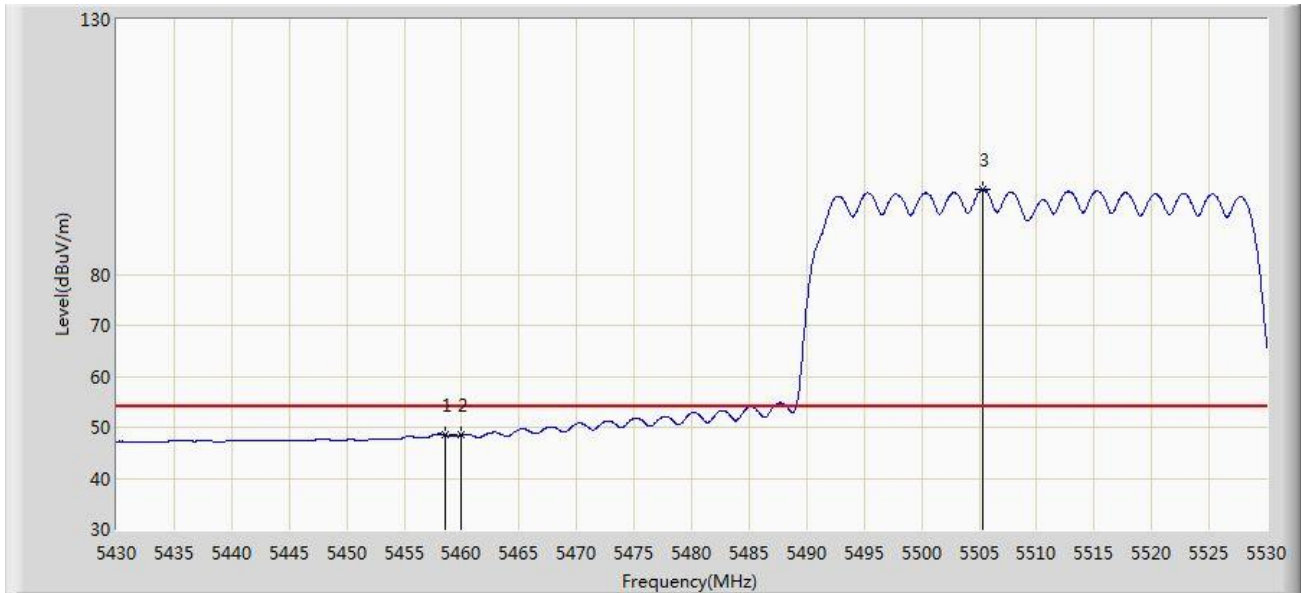


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5458.550        | 48.536                 | 44.401               | -5.464      | 54.000         | 4.135       | AV   |
| 2  |      | 5460.000        | 48.532                 | 44.396               | -5.468      | 54.000         | 4.136       | AV   |
| 3  | *    | 5505.350        | 96.726                 | 92.535               | N/A         | N/A            | 4.191       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:06 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5670MHz Ant 0 + 1 |                          |

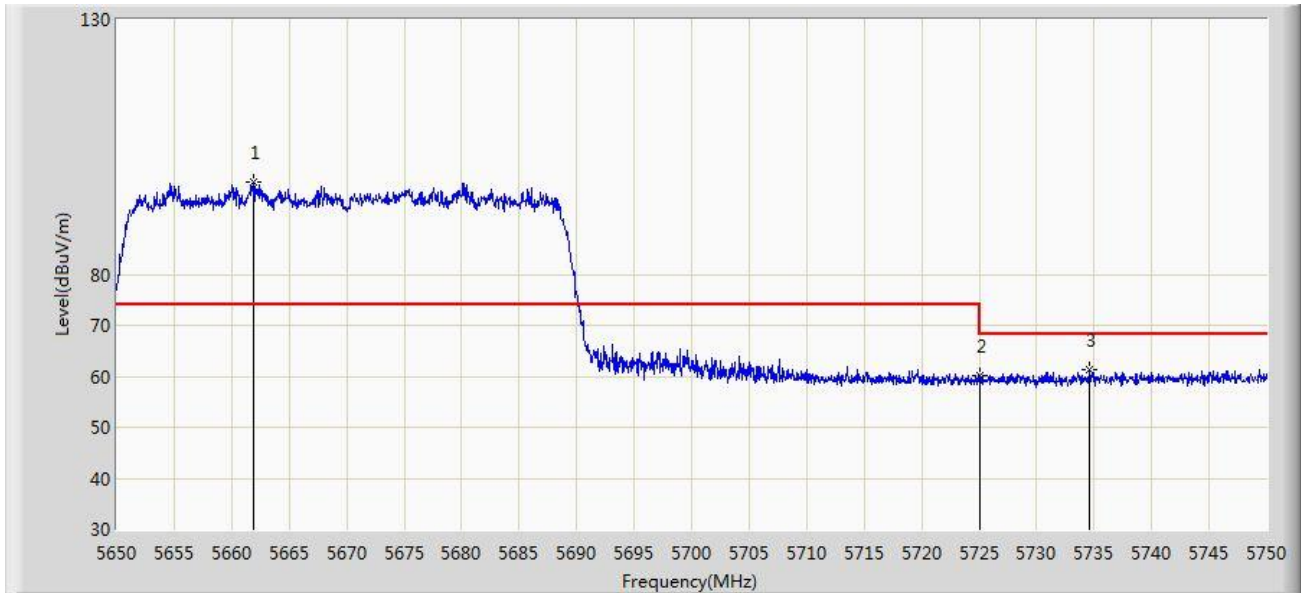


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5661.950        | 98.172                 | 93.380               | N/A         | N/A            | 4.792       | PK   |
| 2  |      | 5725.000        | 60.166                 | 55.132               | -8.034      | 68.200         | 5.034       | PK   |
| 3  |      | 5734.600        | 61.316                 | 56.245               | -6.884      | 68.200         | 5.071       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:05 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE40 at channel 5670MHz Ant 0 + 1 |                          |

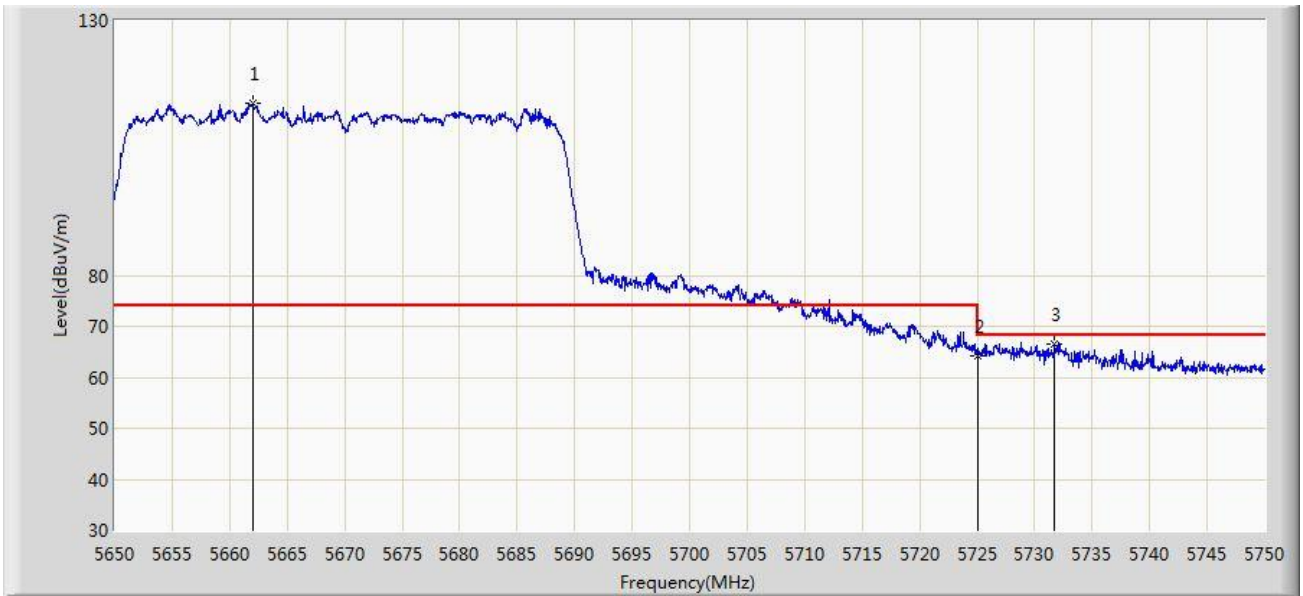


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5662.000        | 113.843                | 109.051              | N/A         | N/A            | 4.792       | PK   |
| 2  |      | 5725.000        | 64.058                 | 59.024               | -4.142      | 68.200         | 5.034       | PK   |
| 3  |      | 5731.750        | 66.520                 | 61.460               | -1.680      | 68.200         | 5.059       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:30 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

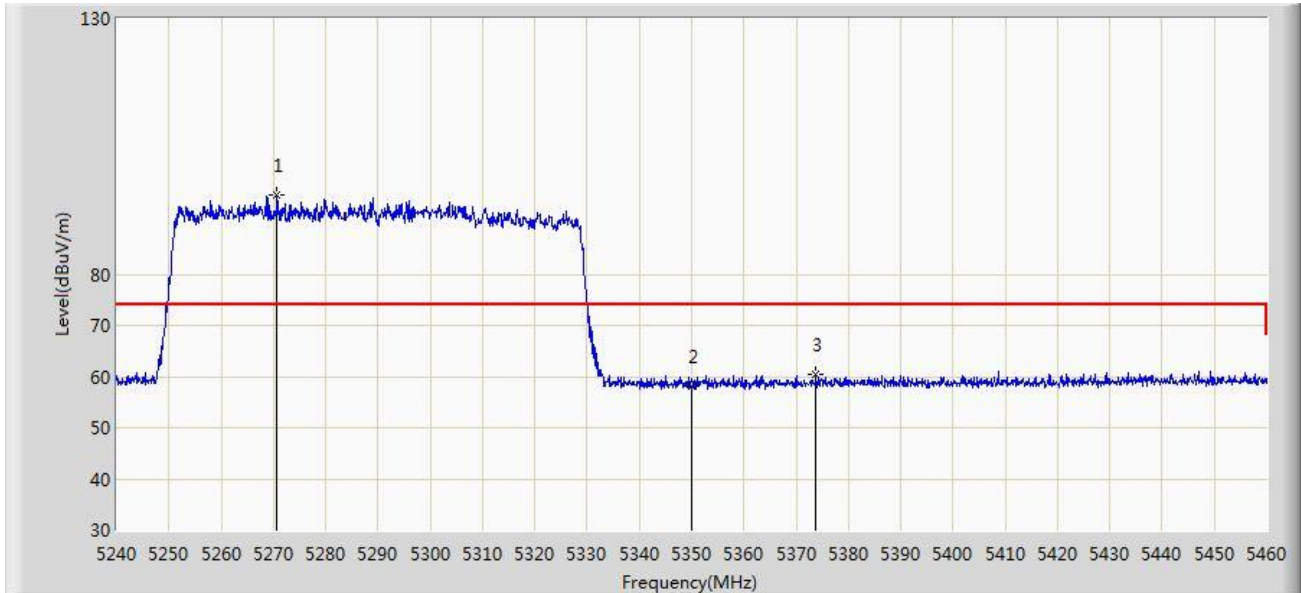


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5270.690        | 95.565                 | 91.588               | N/A         | N/A            | 3.977       | PK   |
| 2  |      | 5350.000        | 58.094                 | 54.050               | -15.906     | 74.000         | 4.044       | PK   |
| 3  |      | 5373.760        | 60.531                 | 56.467               | -13.469     | 74.000         | 4.064       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:32 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

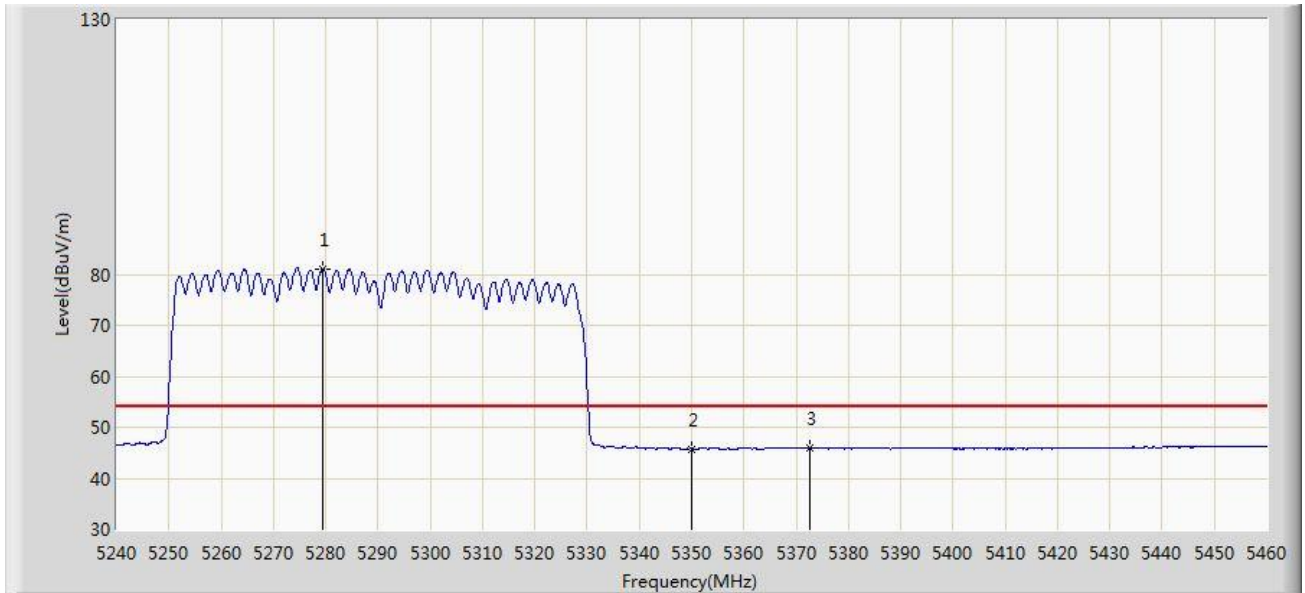


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5279.490        | 81.087                 | 77.102               | N/A         | N/A            | 3.985       | AV   |
| 2  |      | 5350.000        | 45.774                 | 41.730               | -8.226      | 54.000         | 4.044       | AV   |
| 3  |      | 5372.660        | 46.007                 | 41.944               | -7.993      | 54.000         | 4.063       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:27 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

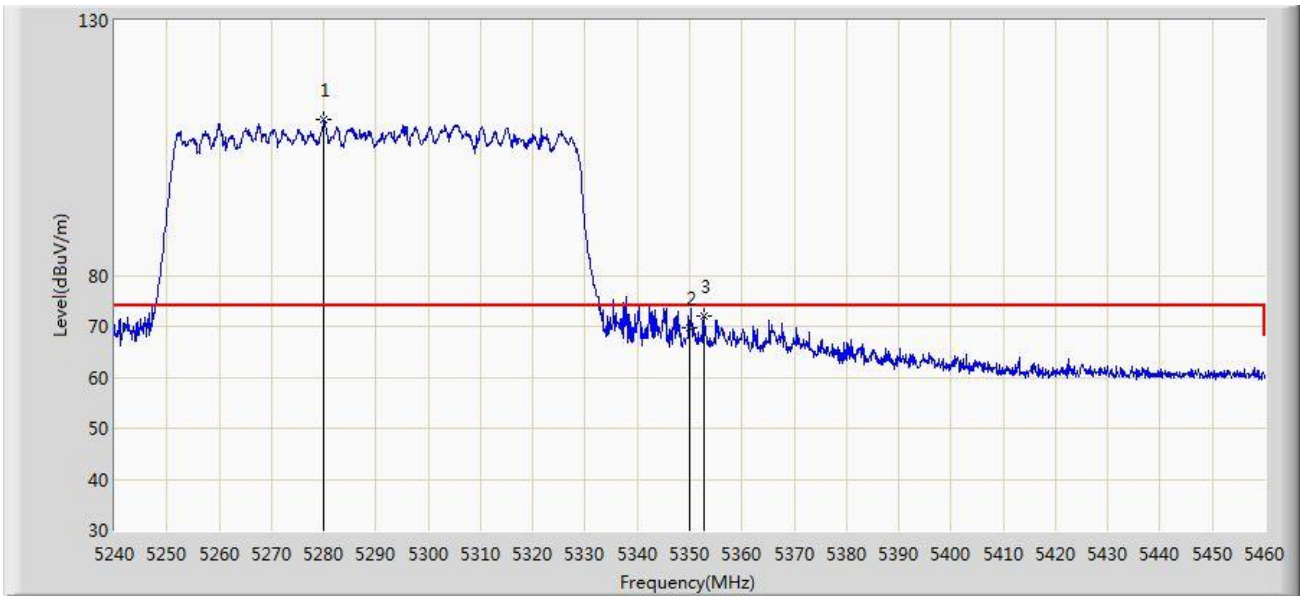


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5280.040        | 110.438                | 106.453              | N/A         | N/A            | 3.985       | PK   |
| 2  |      | 5350.000        | 69.571                 | 65.527               | -4.429      | 74.000         | 4.044       | PK   |
| 3  |      | 5352.860        | 71.968                 | 67.921               | -2.032      | 74.000         | 4.047       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:29 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

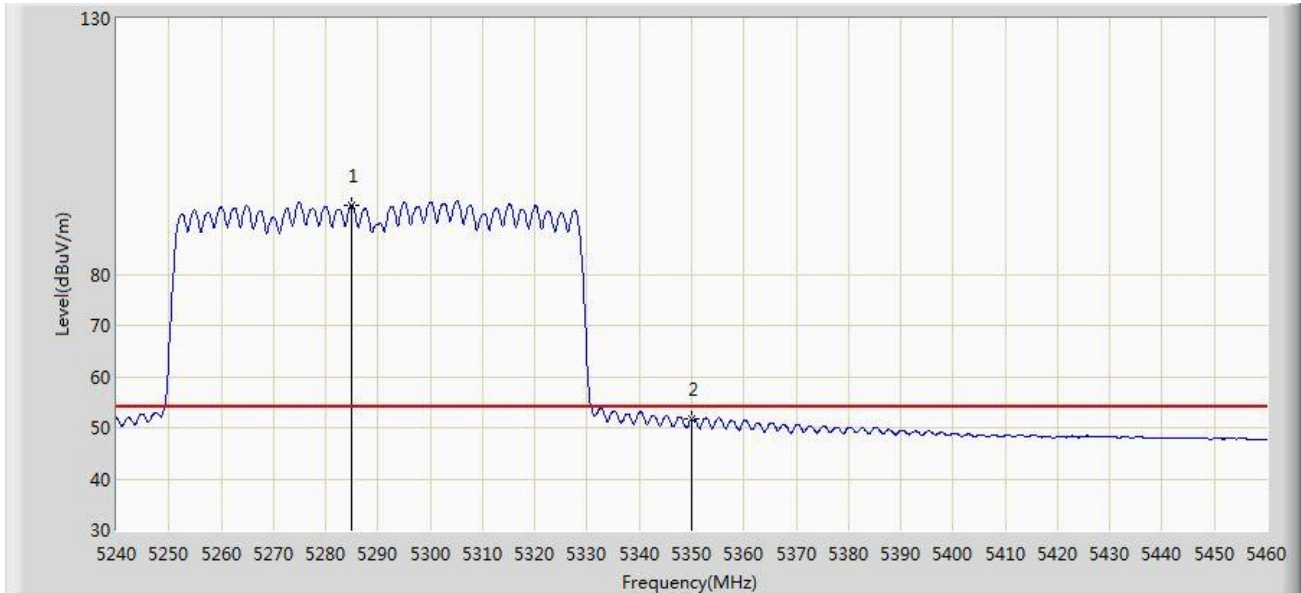


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5284.990        | 93.521                 | 89.532               | N/A         | N/A            | 3.989       | AV   |
| 2  |      | 5350.000        | 51.784                 | 47.740               | -2.216      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:40 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

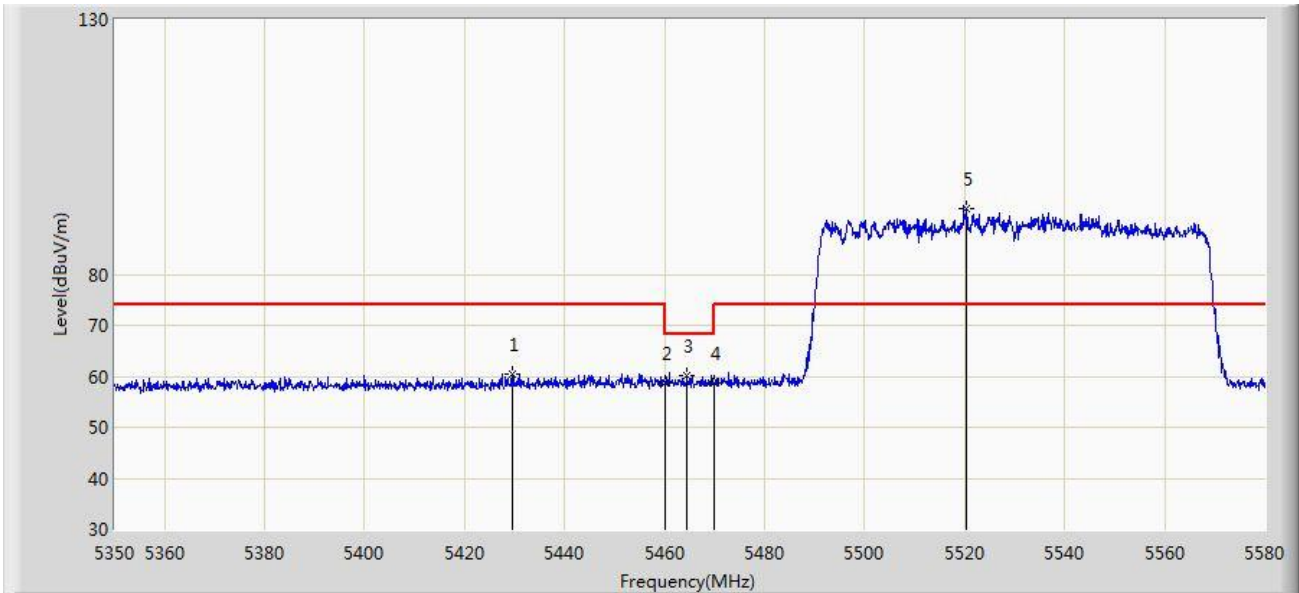


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5429.465        | 60.566                 | 56.455               | -13.434     | 74.000         | 4.111       | PK   |
| 2  |      | 5460.000        | 58.714                 | 54.578               | -15.286     | 74.000         | 4.136       | PK   |
| 3  |      | 5464.425        | 60.090                 | 55.950               | -8.110      | 68.200         | 4.140       | PK   |
| 4  |      | 5470.000        | 58.593                 | 54.449               | -9.607      | 68.200         | 4.144       | PK   |
| 5  | *    | 5520.200        | 93.025                 | 88.777               | N/A         | N/A            | 4.248       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:41 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

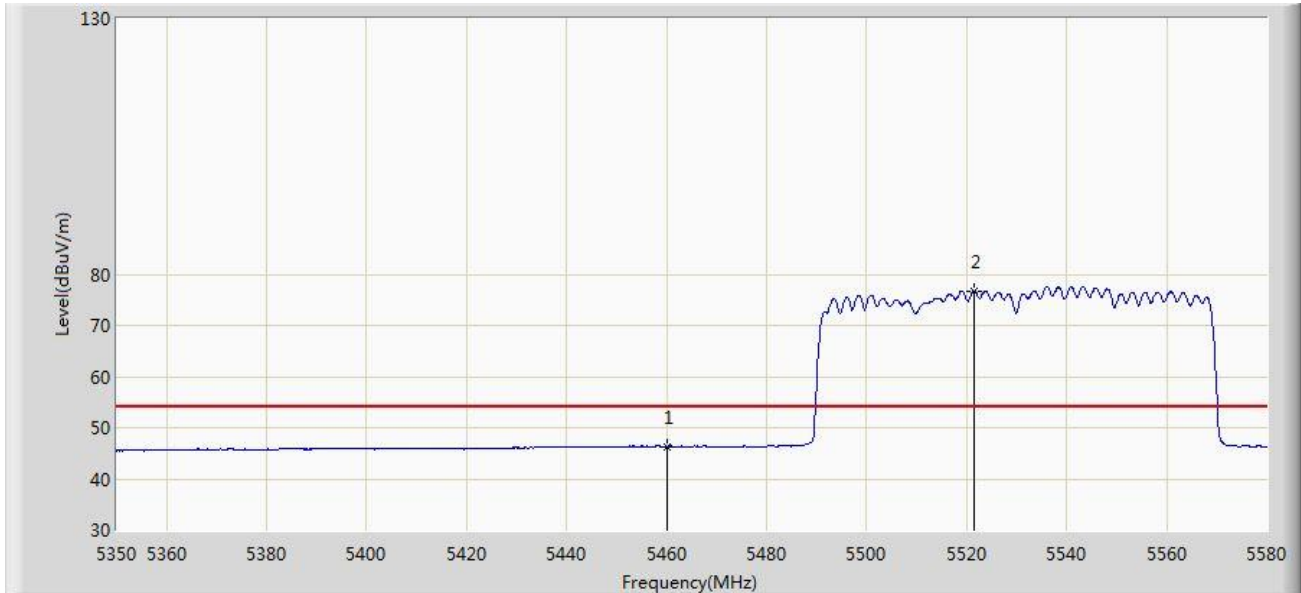


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 46.344                 | 42.208               | -7.656      | 54.000         | 4.136       | AV   |
| 2  | *    | 5521.580        | 76.760                 | 72.507               | N/A         | N/A            | 4.253       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:37 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

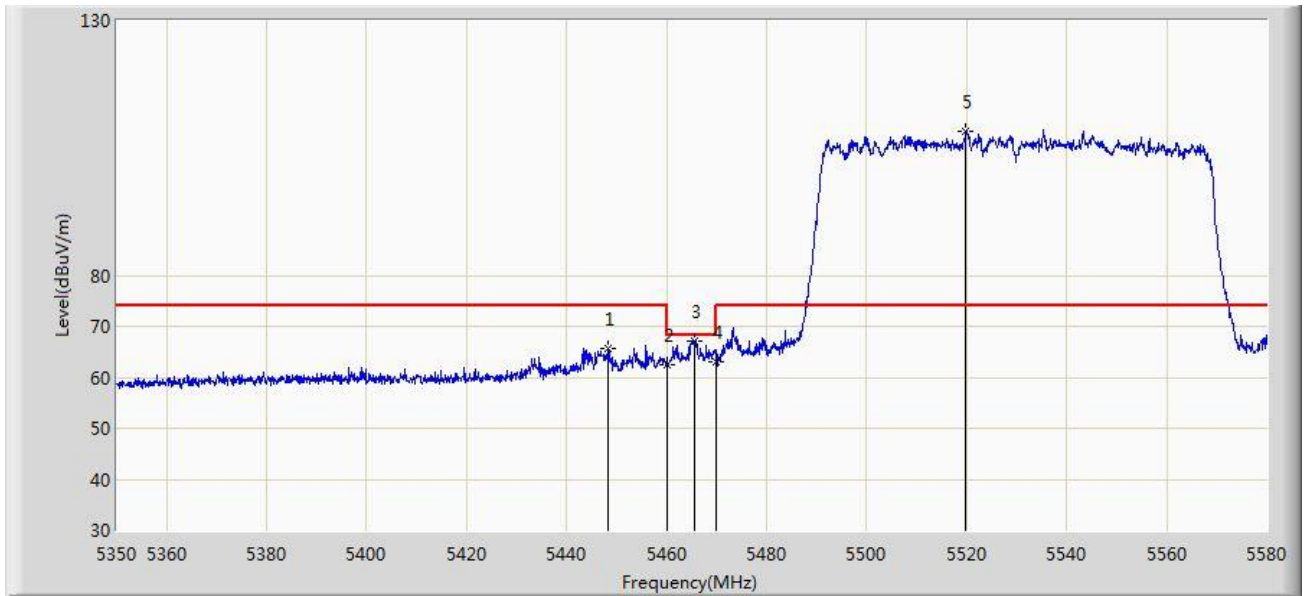


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5448.325        | 65.620                 | 61.494               | -8.380      | 74.000         | 4.126       | PK   |
| 2  |      | 5460.000        | 62.445                 | 58.309               | -11.555     | 74.000         | 4.136       | PK   |
| 3  |      | 5465.575        | 67.135                 | 62.994               | -1.065      | 68.200         | 4.141       | PK   |
| 4  |      | 5470.000        | 63.124                 | 58.980               | -5.076      | 68.200         | 4.144       | PK   |
| 5  | *    | 5519.855        | 108.145                | 103.899              | N/A         | N/A            | 4.246       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:38 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

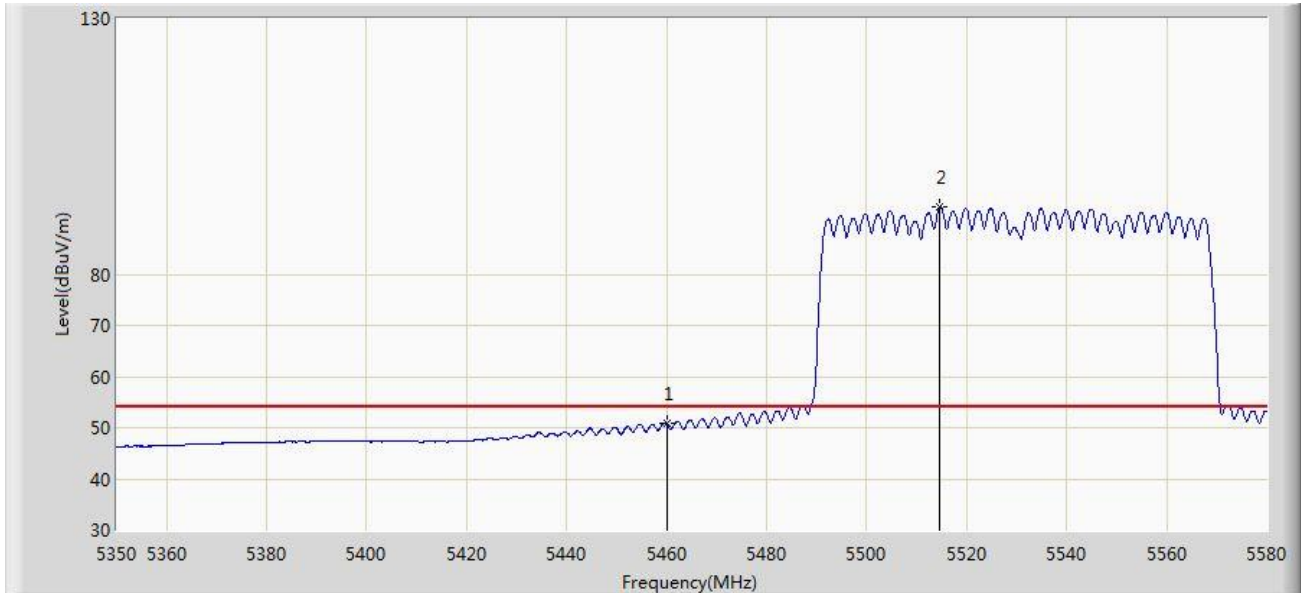


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 50.785                 | 46.649               | -3.215      | 54.000         | 4.136       | AV   |
| 2  | *    | 5514.565        | 93.050                 | 88.824               | N/A         | N/A            | 4.225       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:48 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5610MHz Ant 0 + 1 |                          |

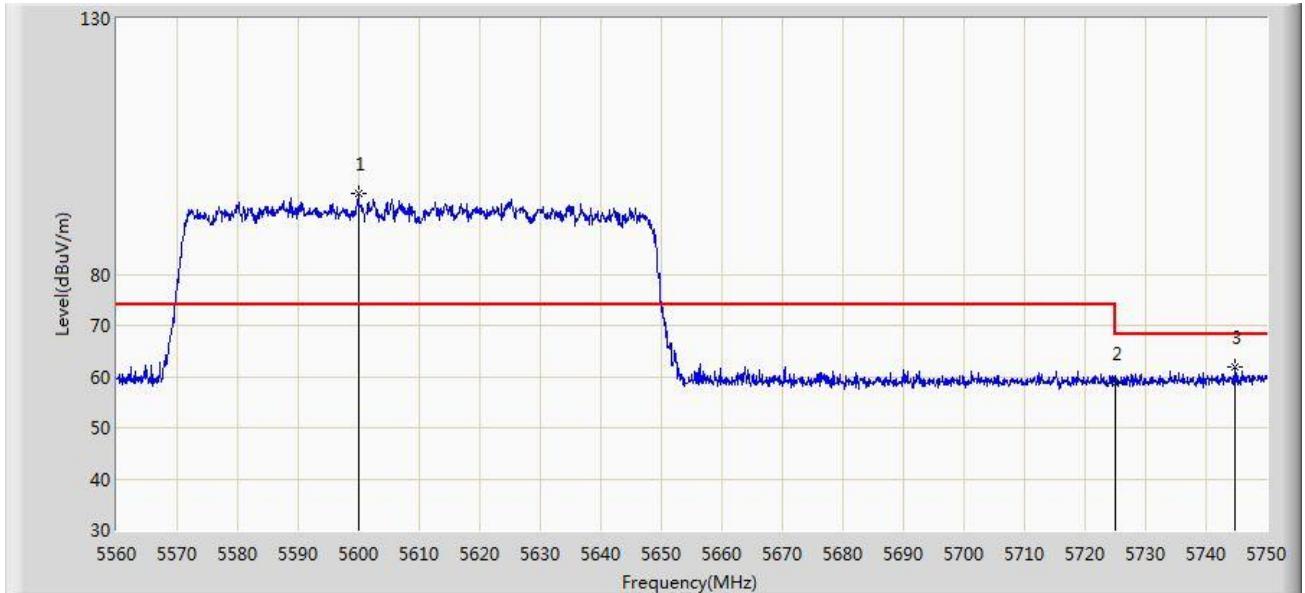


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5599.995        | 95.914                 | 91.360               | N/A         | N/A            | 4.554       | PK   |
| 2  |      | 5725.000        | 58.552                 | 53.518               | -9.648      | 68.200         | 5.034       | PK   |
| 3  |      | 5744.775        | 61.810                 | 56.700               | -6.390      | 68.200         | 5.109       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/29 - 02:47 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11 ax-HE80 at channel 5610MHz Ant 0 + 1 |                          |

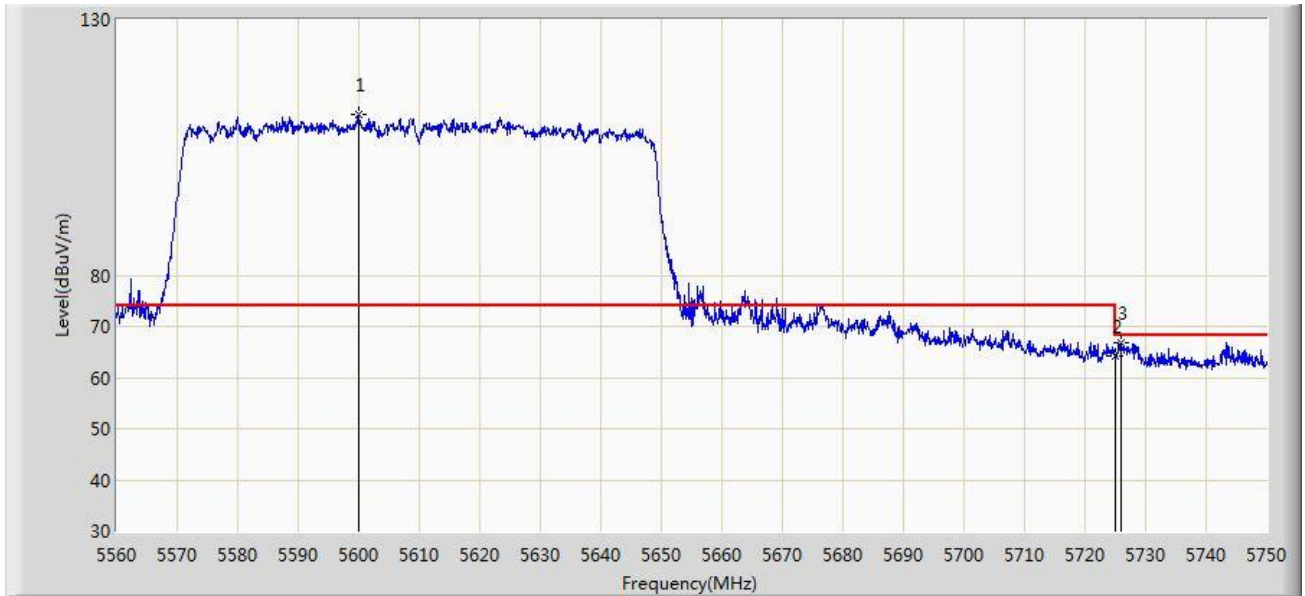

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5600.090        | 111.365                | 106.811              | N/A         | N/A            | 4.554       | PK   |
| 2  |      | 5725.000        | 64.326                 | 59.292               | -3.874      | 68.200         | 5.034       | PK   |
| 3  |      | 5725.870        | 66.827                 | 61.790               | -1.373      | 68.200         | 5.038       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

**For APIN0504 - Directional Antenna (AP-ANT-28)**

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:34 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5324.640        | 114.858                | 110.835              | N/A         | N/A            | 4.023       | PK   |
| 2  |      |      | 5350.000        | 72.045                 | 68.001               | -1.955      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5350.080        | 72.589                 | 68.545               | -1.411      | 74.000         | 4.044       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |

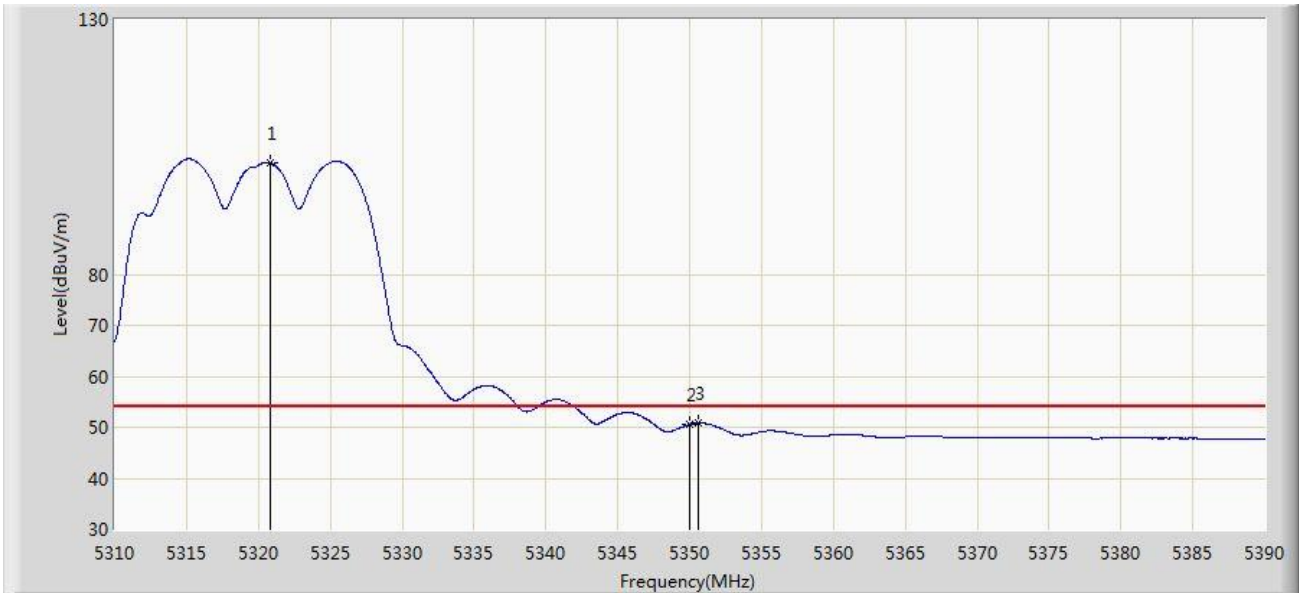


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5320.800        | 101.903                | 97.883               | N/A         | N/A            | 4.020       | AV   |
| 2  |      |      | 5350.000        | 50.514                 | 46.470               | -3.486      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5350.640        | 50.790                 | 46.745               | -3.210      | 54.000         | 4.045       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |

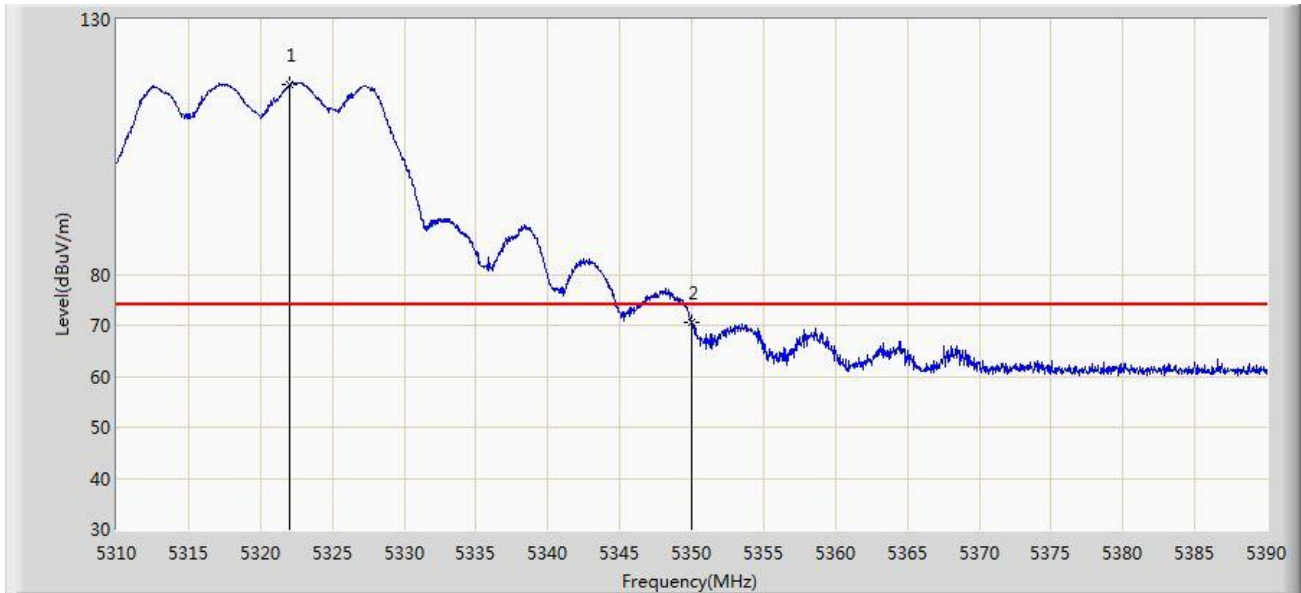


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.040        | 117.151                | 113.130              | N/A         | N/A            | 4.021       | PK   |
| 2  |      |      | 5350.000        | 70.527                 | 66.483               | -3.473      | 74.000         | 4.044       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:41 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |

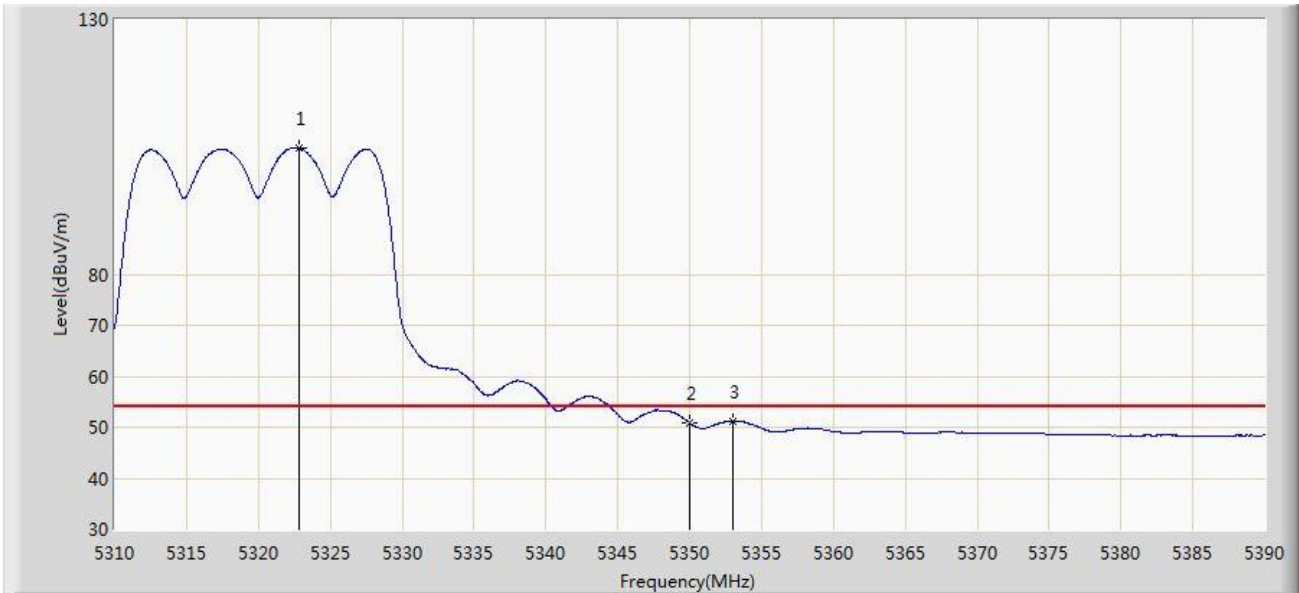


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.880        | 104.815                | 100.794              | N/A         | N/A            | 4.021       | AV   |
| 2  |      |      | 5350.000        | 50.896                 | 46.852               | -3.104      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5352.960        | 51.240                 | 47.193               | -2.760      | 54.000         | 4.047       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:51 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

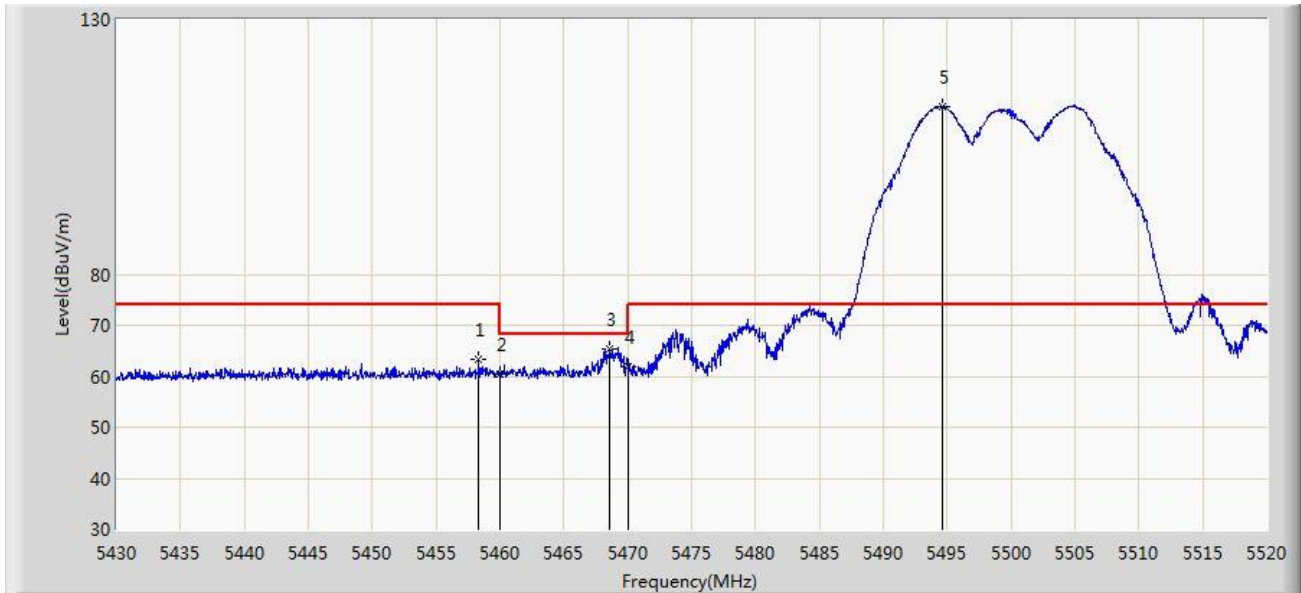


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5458.350        | 63.318                 | 59.183               | -10.682     | 74.000         | 4.135       | PK   |
| 2  |      |      | 5460.000        | 60.528                 | 56.392               | -13.472     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5468.565        | 65.392                 | 61.249               | -2.808      | 68.200         | 4.143       | PK   |
| 4  |      |      | 5470.000        | 61.807                 | 57.663               | -6.393      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5494.620        | 112.852                | 108.680              | N/A         | N/A            | 4.171       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:52 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

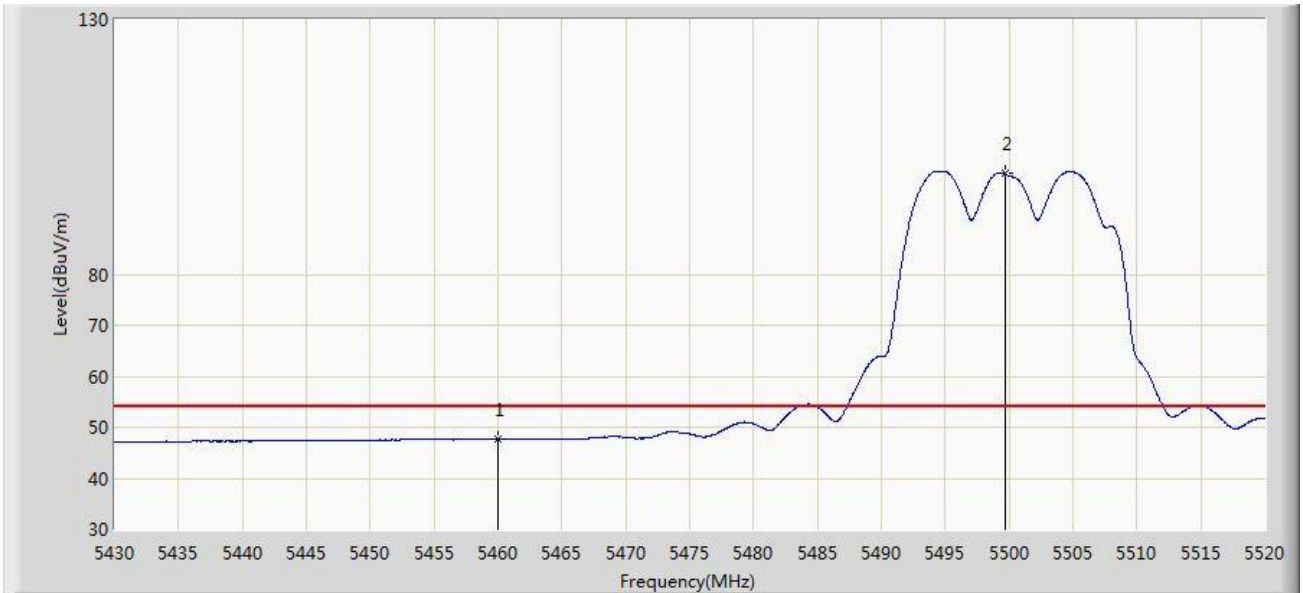


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.619                 | 43.483               | -6.381      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5499.660        | 99.842                 | 95.662               | N/A         | N/A            | 4.181       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:53 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

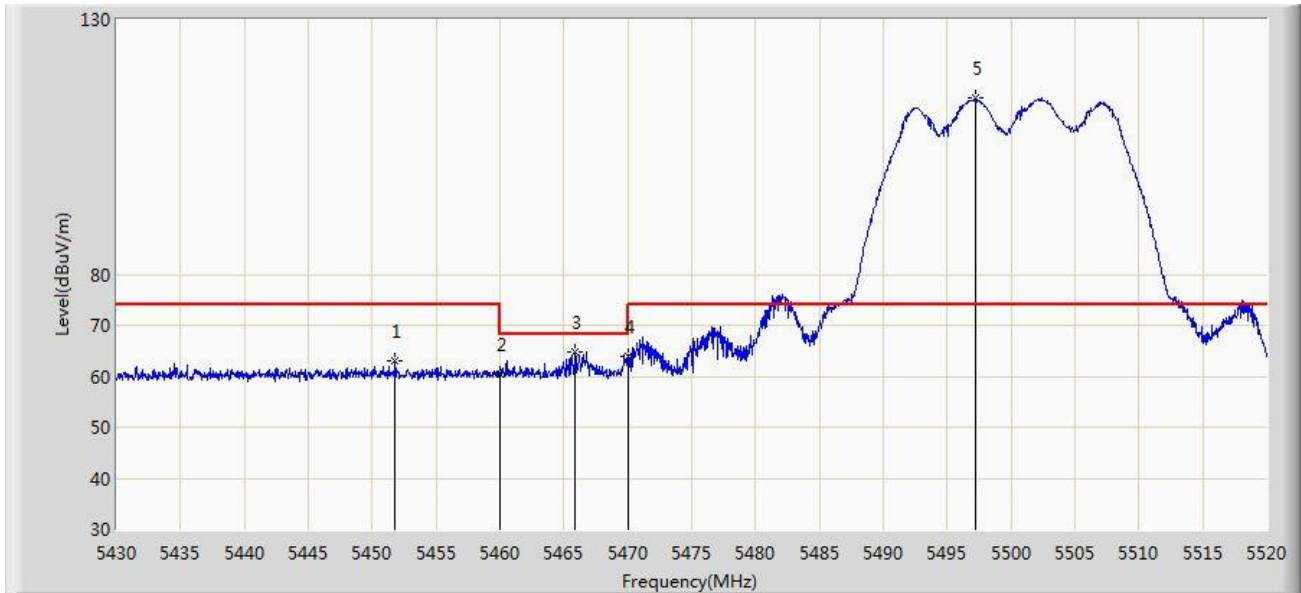


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5451.780        | 62.998                 | 58.869               | -11.002     | 74.000         | 4.129       | PK   |
| 2  |      |      | 5460.000        | 60.479                 | 56.343               | -13.521     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5465.910        | 64.814                 | 60.673               | -3.386      | 68.200         | 4.141       | PK   |
| 4  |      |      | 5470.000        | 63.998                 | 59.854               | -4.202      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5497.185        | 114.617                | 110.441              | N/A         | N/A            | 4.177       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 03:54 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

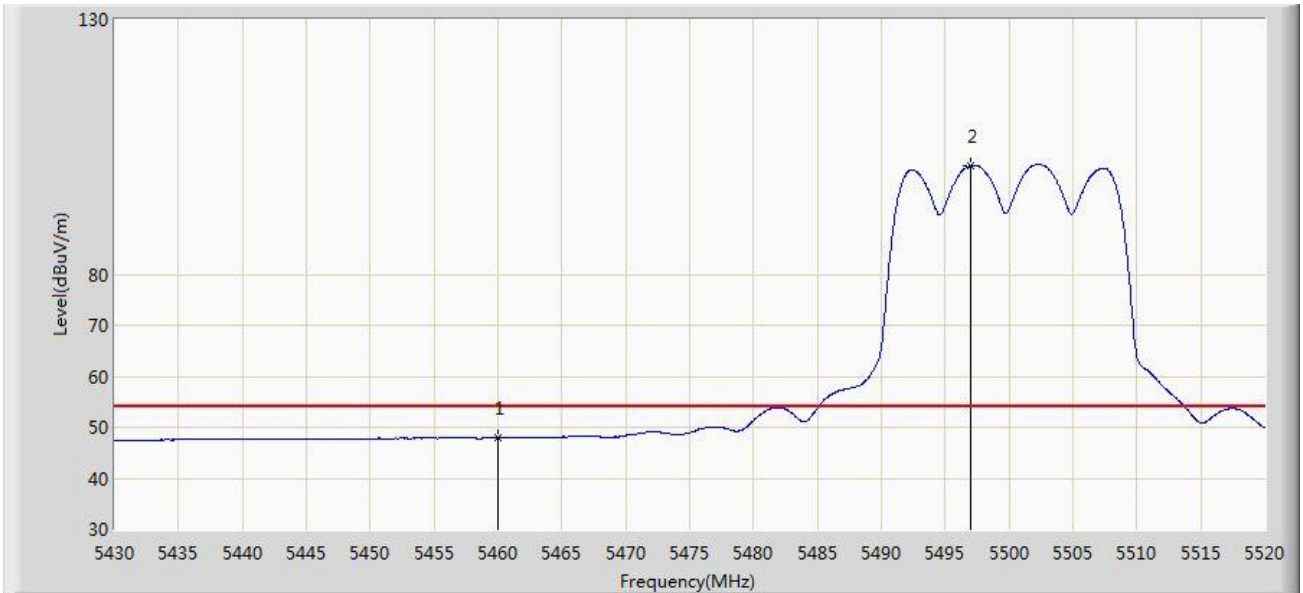


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.995                 | 43.859               | -6.005      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5497.005        | 101.327                | 97.151               | N/A         | N/A            | 4.176       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 04:58 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5700MHz Ant 0 + 1 |                          |

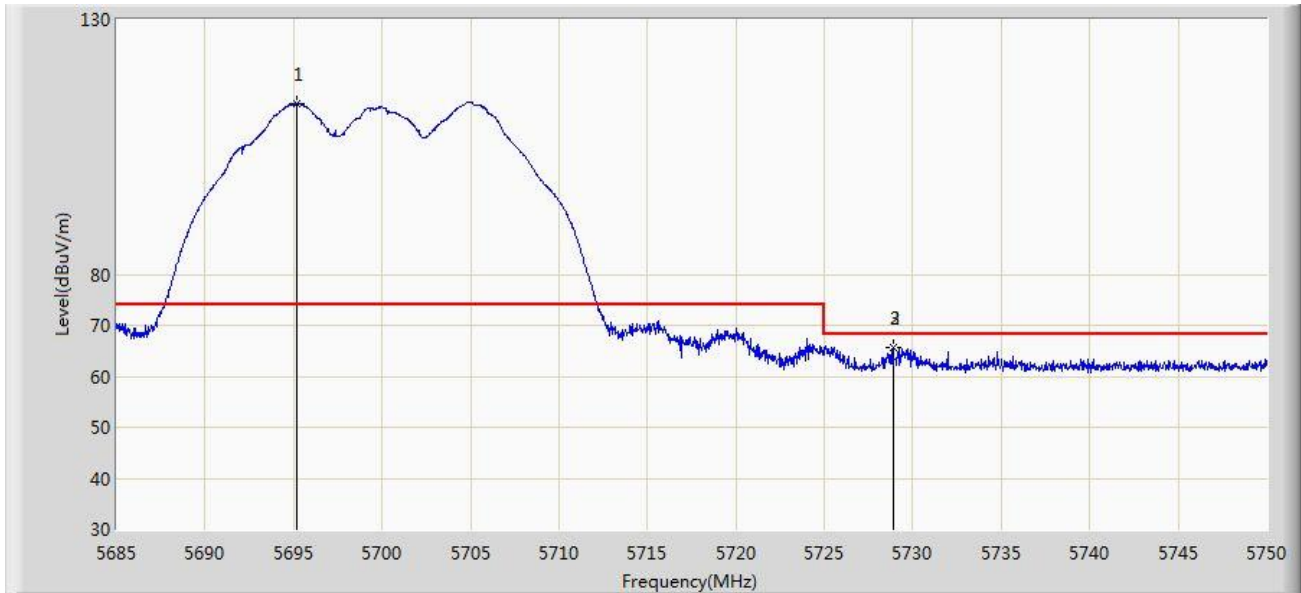


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5695.172        | 113.429                | 108.510              | N/A         | N/A            | 4.920       | PK   |
| 2  |      |      | 5728.875        | 65.629                 | 60.580               | -2.571      | 68.200         | 5.049       | PK   |
| 3  |      |      | 5728.875        | 65.629                 | 60.580               | -2.571      | 68.200         | 5.049       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 05:04 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5700MHz Ant 0 + 1 |                          |

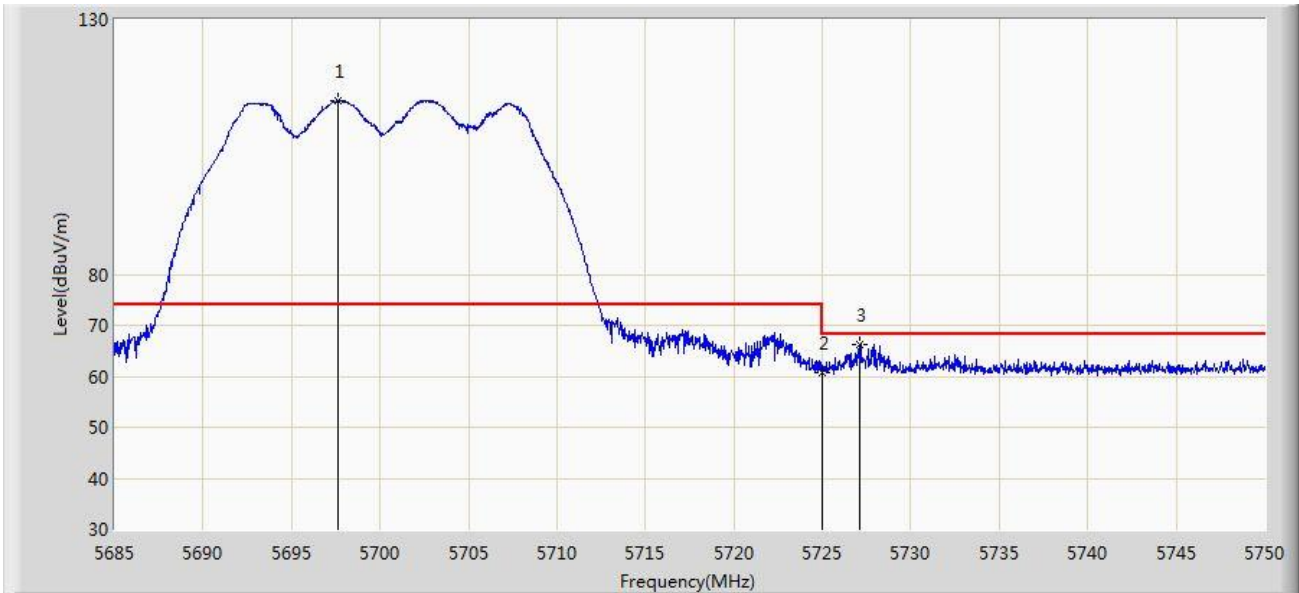


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5697.643        | 114.142                | 109.213              | N/A         | N/A            | 4.929       | PK   |
| 2  |      |      | 5725.000        | 60.766                 | 55.732               | -7.434      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5727.152        | 66.223                 | 61.181               | -1.977      | 68.200         | 5.042       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

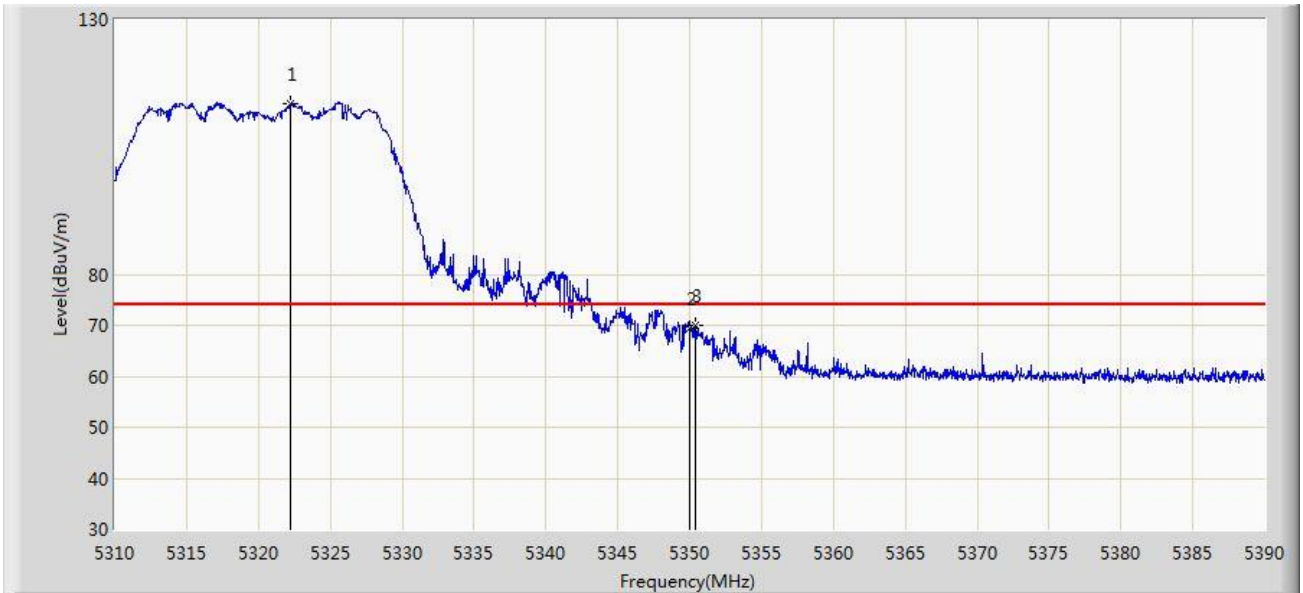


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.240        | 113.464                | 109.443              | N/A         | N/A            | 4.021       | PK   |
| 2  |      |      | 5350.000        | 69.363                 | 65.319               | -4.637      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5350.440        | 70.143                 | 66.098               | -3.857      | 74.000         | 4.045       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:40 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

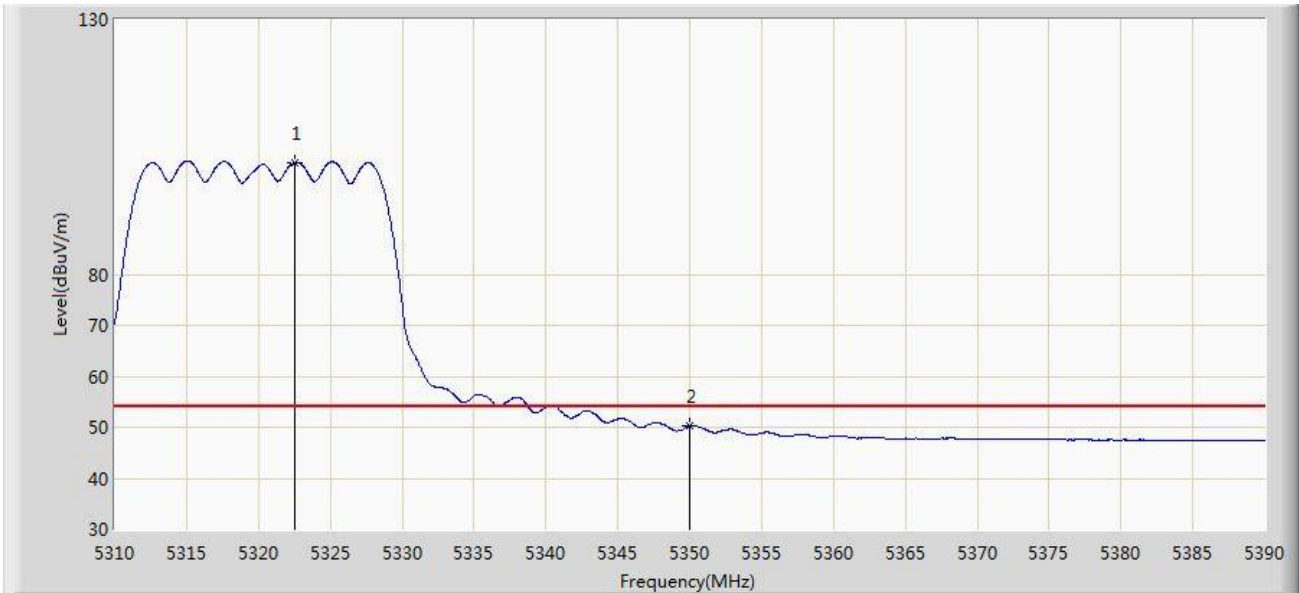


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.520        | 101.921                | 97.900               | N/A         | N/A            | 4.021       | AV   |
| 2  |      |      | 5350.000        | 50.259                 | 46.215               | -3.741      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:36 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

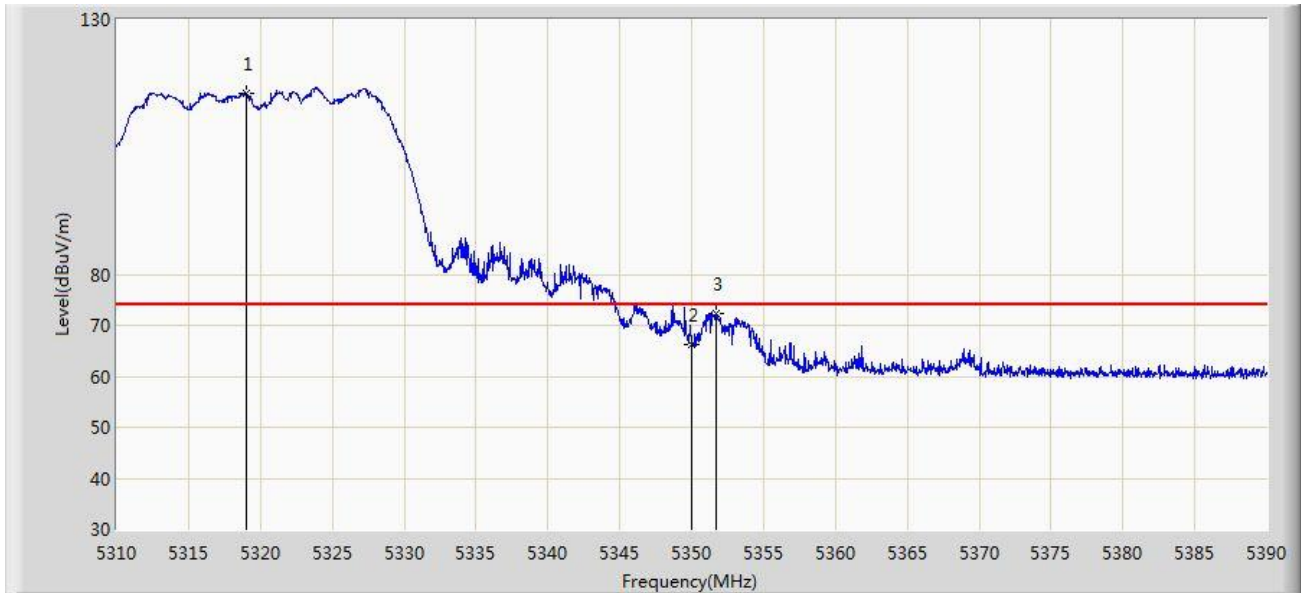


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5319.040        | 115.573                | 111.555              | N/A         | N/A            | 4.018       | PK   |
| 2  |      |      | 5350.000        | 66.124                 | 62.080               | -7.876      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5351.720        | 72.397                 | 68.351               | -1.603      | 74.000         | 4.046       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:38 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

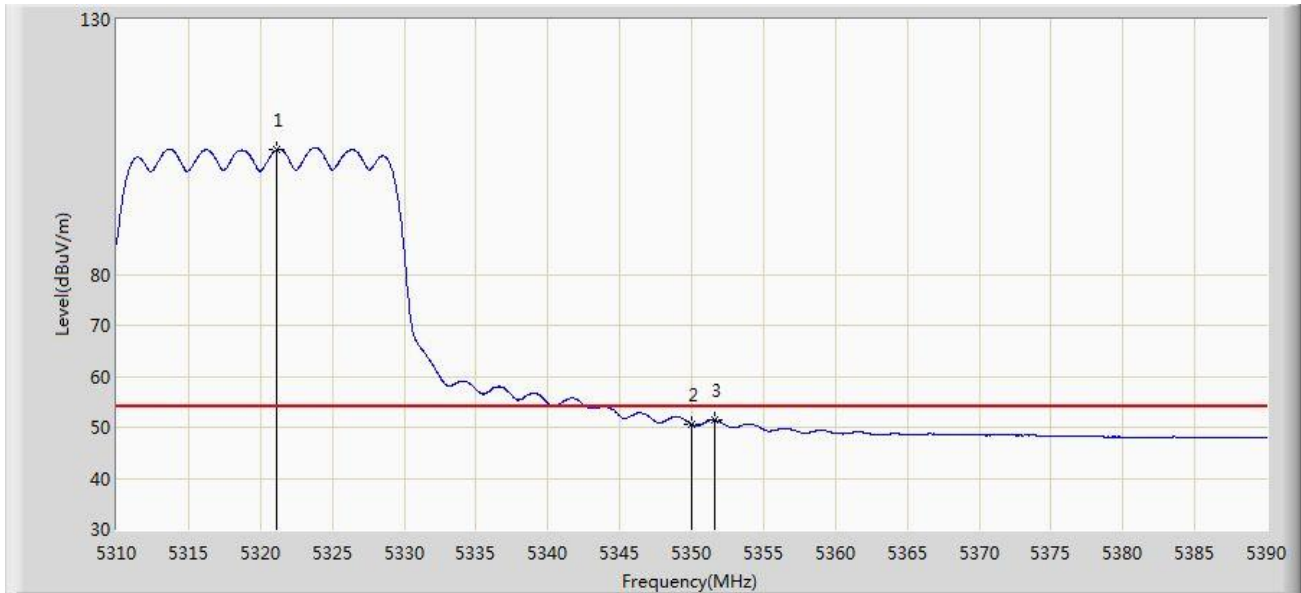


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5321.120        | 104.446                | 100.426              | N/A         | N/A            | 4.020       | AV   |
| 2  |      |      | 5350.000        | 50.606                 | 46.562               | -3.394      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5351.640        | 51.377                 | 47.331               | -2.623      | 54.000         | 4.046       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:48 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1 |                          |

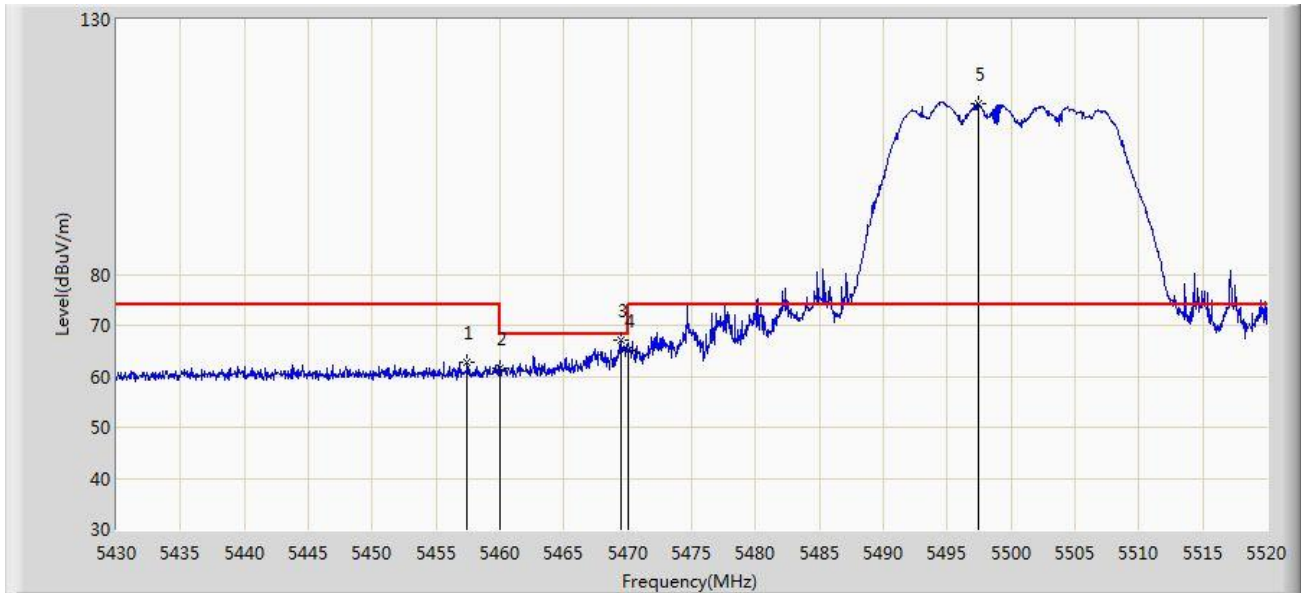


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5457.450        | 62.811                 | 58.677               | -11.189     | 74.000         | 4.134       | PK   |
| 2  |      |      | 5460.000        | 61.487                 | 57.351               | -12.513     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5469.510        | 67.033                 | 62.889               | -1.167      | 68.200         | 4.144       | PK   |
| 4  |      |      | 5470.000        | 64.975                 | 60.831               | -3.225      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5497.455        | 113.407                | 109.230              | N/A         | N/A            | 4.177       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:49 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1 |                          |

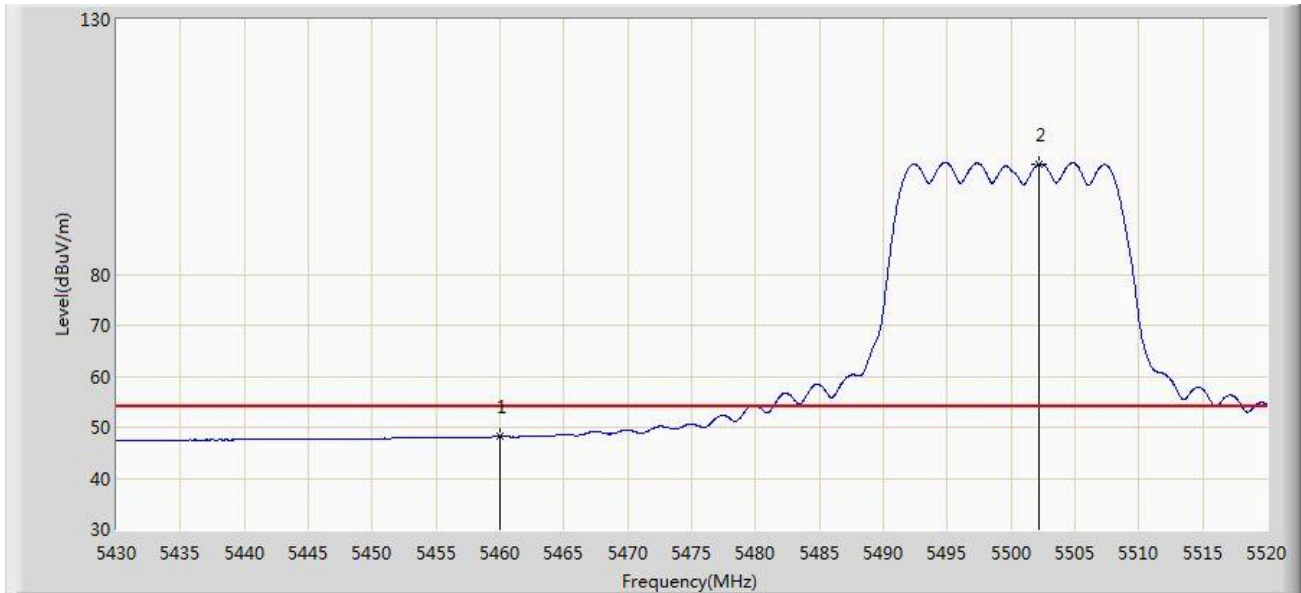


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 48.201                 | 44.065               | -5.799      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5502.180        | 101.597                | 97.412               | N/A         | N/A            | 4.185       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:51 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1 |                          |

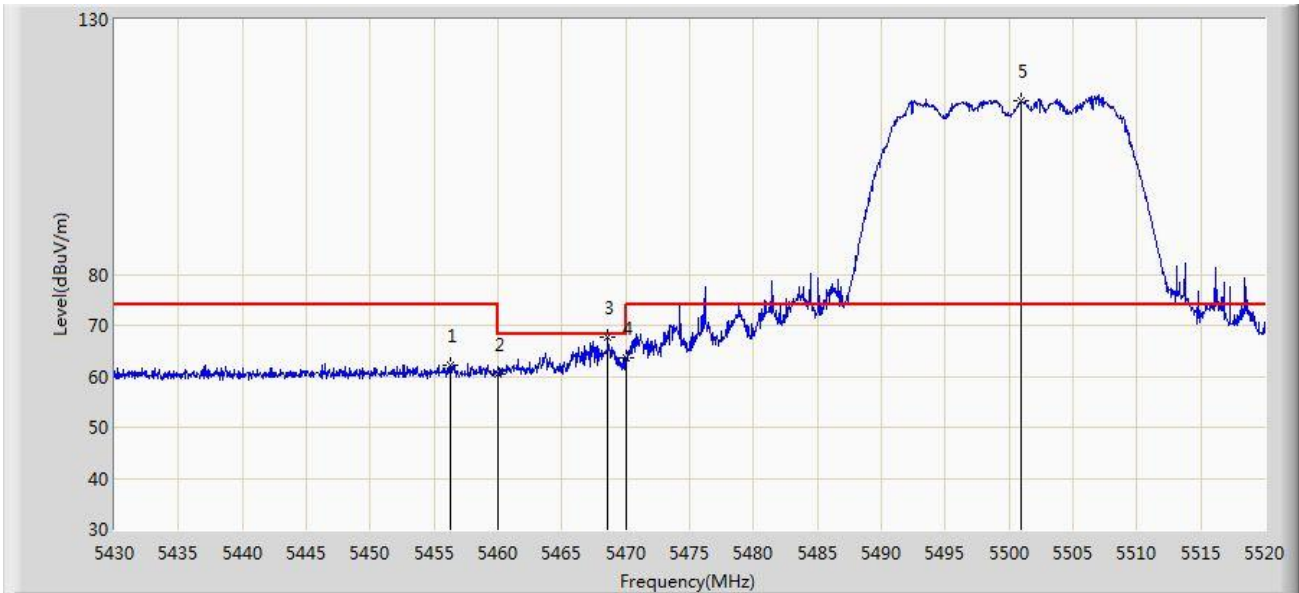


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.235        | 62.294                 | 58.161               | -11.706     | 74.000         | 4.133       | PK   |
| 2  |      |      | 5460.000        | 60.432                 | 56.296               | -13.568     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5468.565        | 67.572                 | 63.429               | -0.628      | 68.200         | 4.143       | PK   |
| 4  |      |      | 5470.000        | 63.505                 | 59.361               | -4.695      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5500.920        | 114.009                | 109.827              | N/A         | N/A            | 4.183       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:53 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1 |                          |

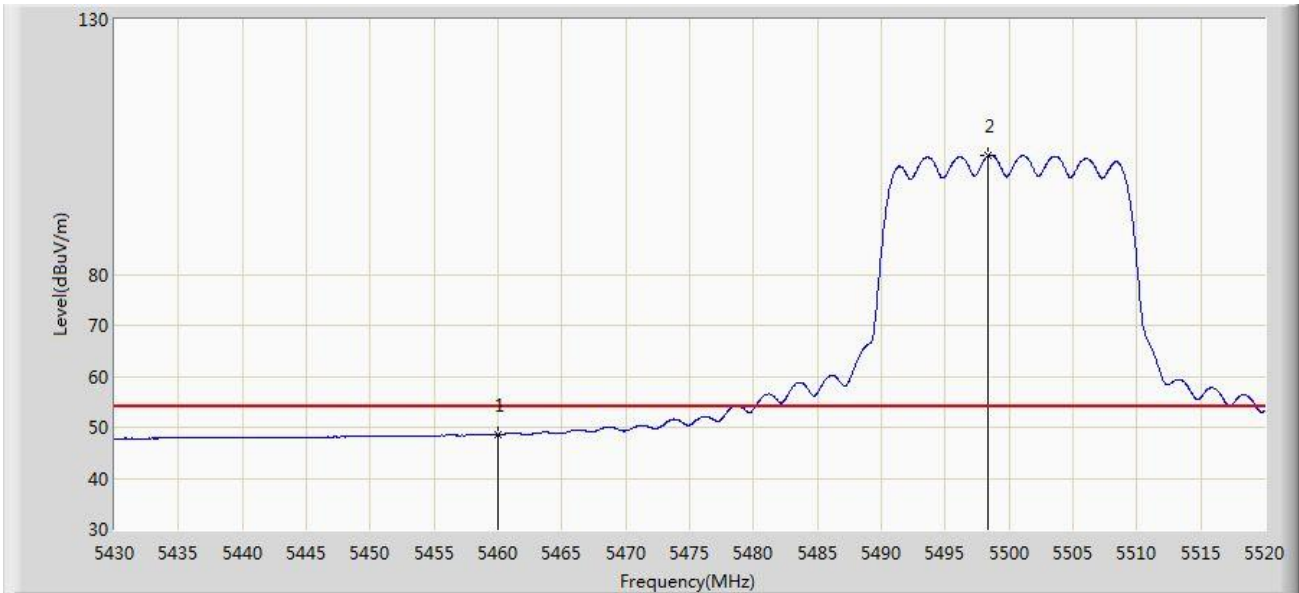


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 48.539                 | 44.403               | -5.461      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5498.310        | 103.200                | 99.022               | N/A         | N/A            | 4.178       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:57 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1 |                          |

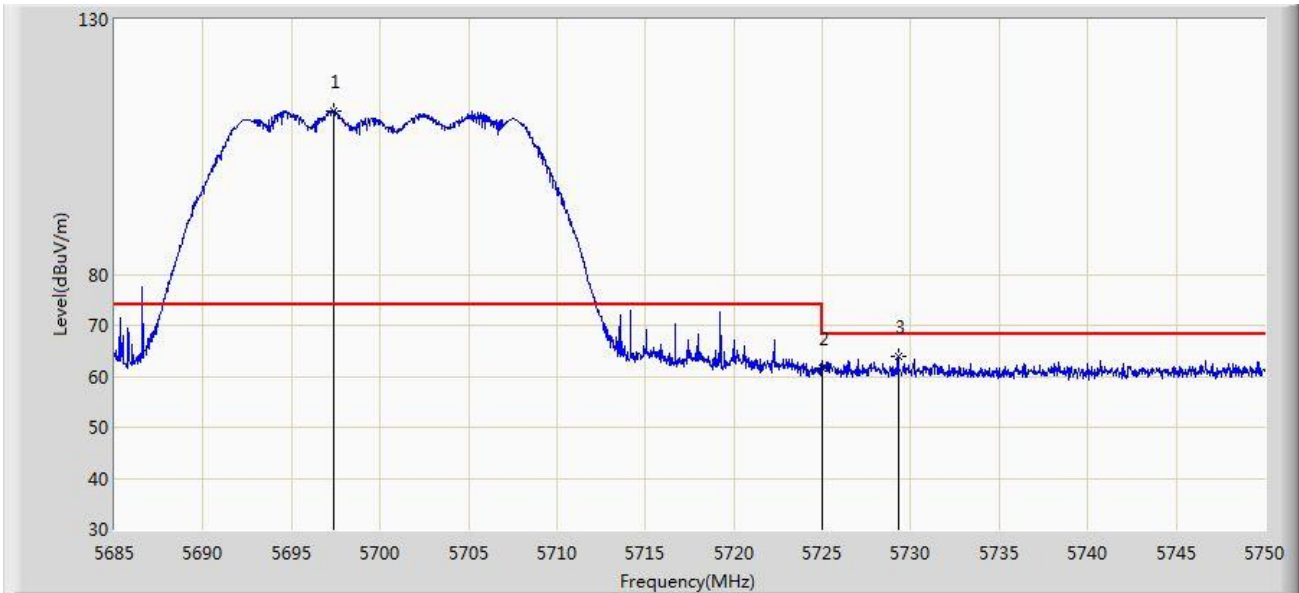


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5697.415        | 112.020                | 107.092              | N/A         | N/A            | 4.929       | PK   |
| 2  |      |      | 5725.000        | 61.618                 | 56.584               | -6.582      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5729.297        | 64.042                 | 58.992               | -4.158      | 68.200         | 5.050       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 05:58 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1 |                          |

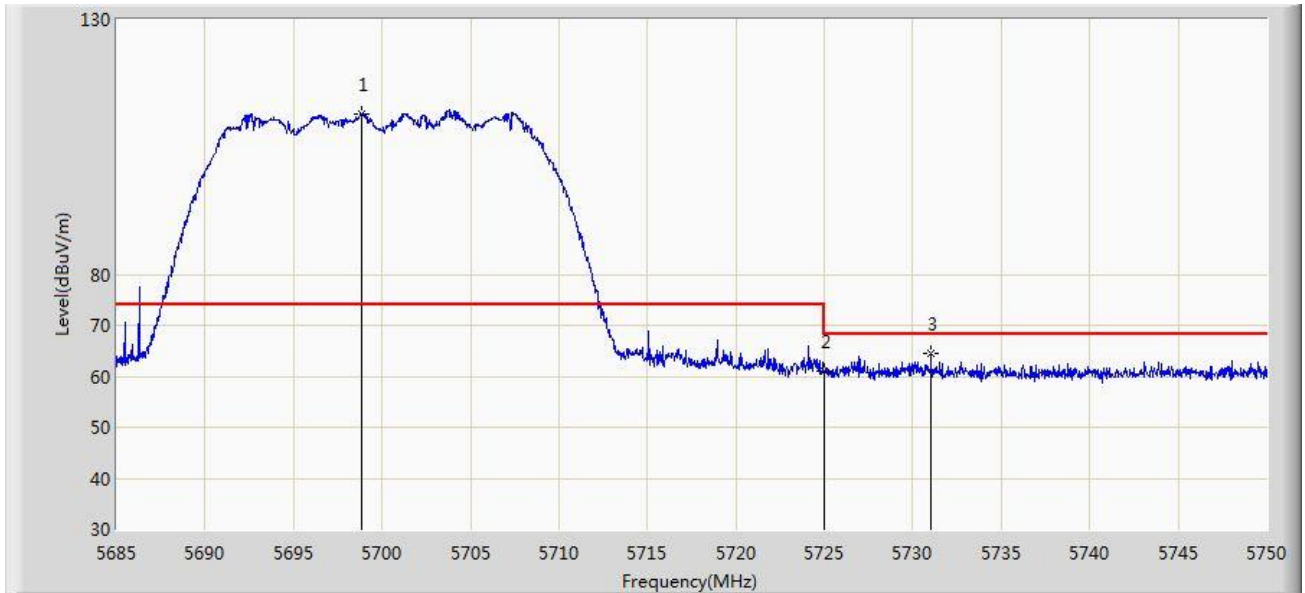


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5698.812        | 111.587                | 106.654              | N/A         | N/A            | 4.933       | PK   |
| 2  |      |      | 5725.000        | 60.887                 | 55.853               | -7.313      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5731.020        | 64.387                 | 59.330               | -3.813      | 68.200         | 5.057       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:29 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1 |                          |

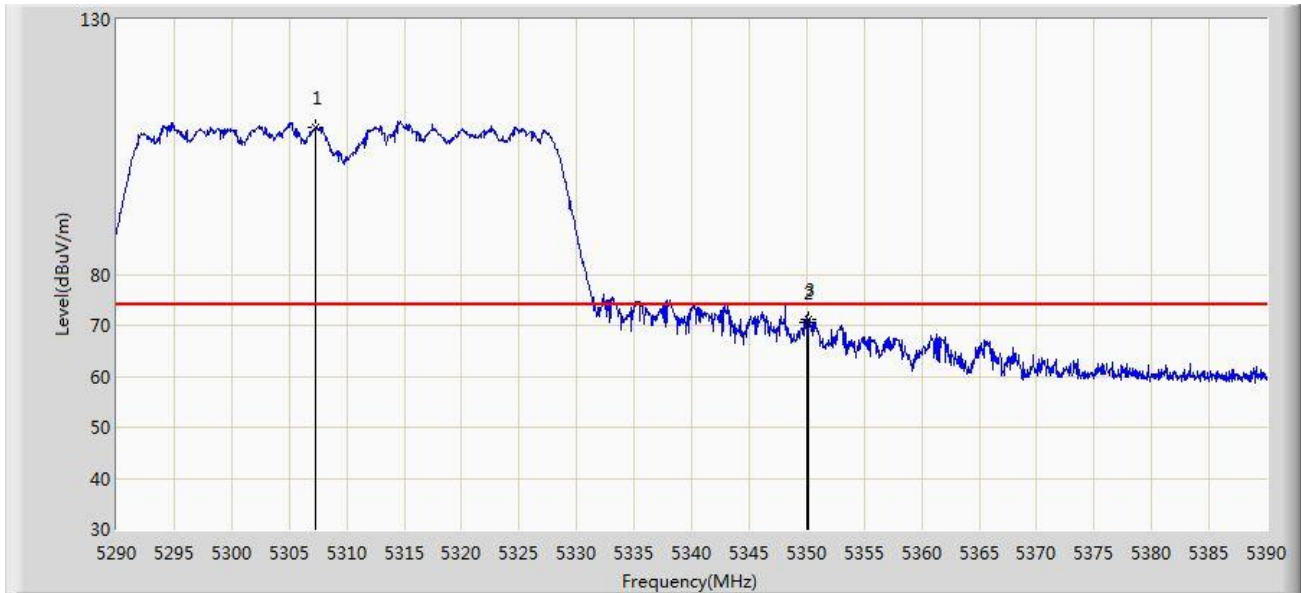


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5307.300        | 108.772                | 104.764              | N/A         | N/A            | 4.008       | PK   |
| 2  |      |      | 5350.000        | 70.512                 | 66.468               | -3.488      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5350.150        | 71.205                 | 67.161               | -2.795      | 74.000         | 4.044       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:31 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1 |                          |

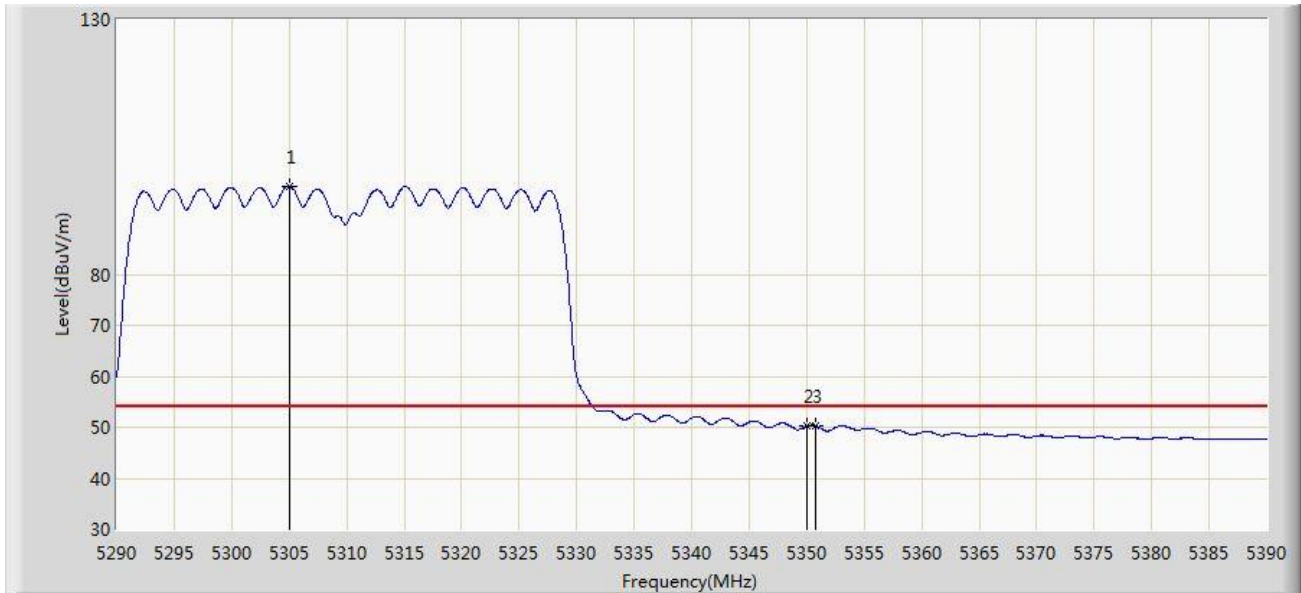


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5305.050        | 97.372                 | 93.366               | N/A         | N/A            | 4.006       | AV   |
| 2  |      |      | 5350.000        | 50.236                 | 46.192               | -3.764      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5350.750        | 50.352                 | 46.307               | -3.648      | 54.000         | 4.045       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:31 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1 |                          |

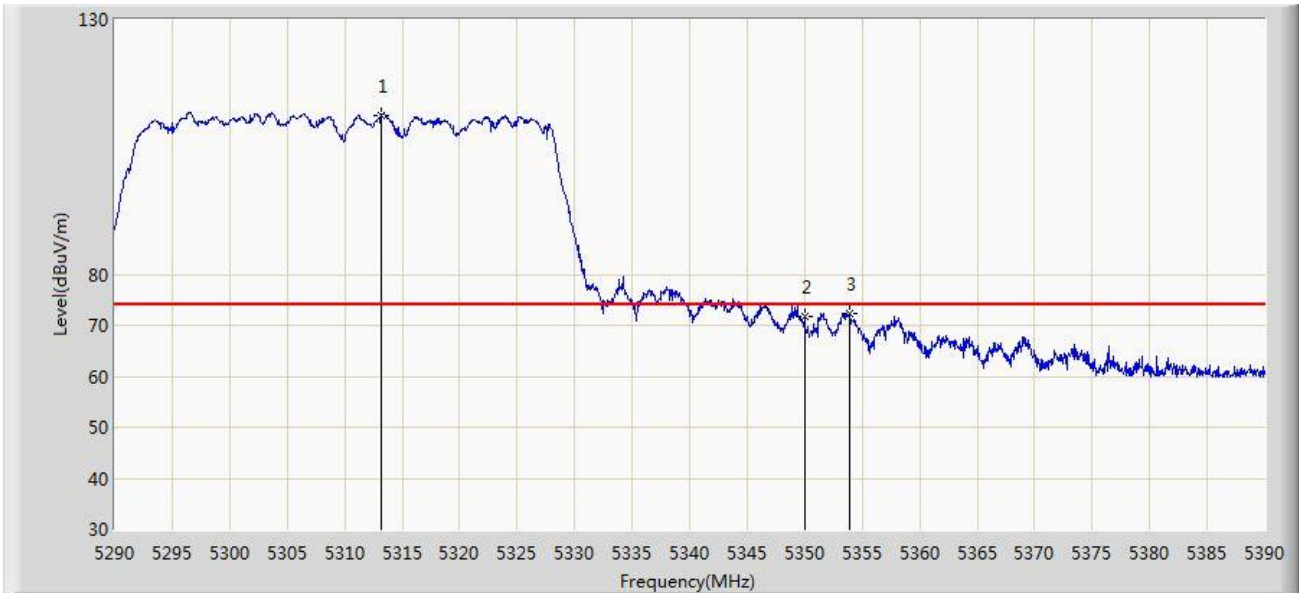


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5313.150        | 111.269                | 107.256              | N/A         | N/A            | 4.013       | PK   |
| 2  |      |      | 5350.000        | 71.612                 | 67.568               | -2.388      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5353.950        | 72.205                 | 68.157               | -1.795      | 74.000         | 4.048       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:33 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1 |                          |

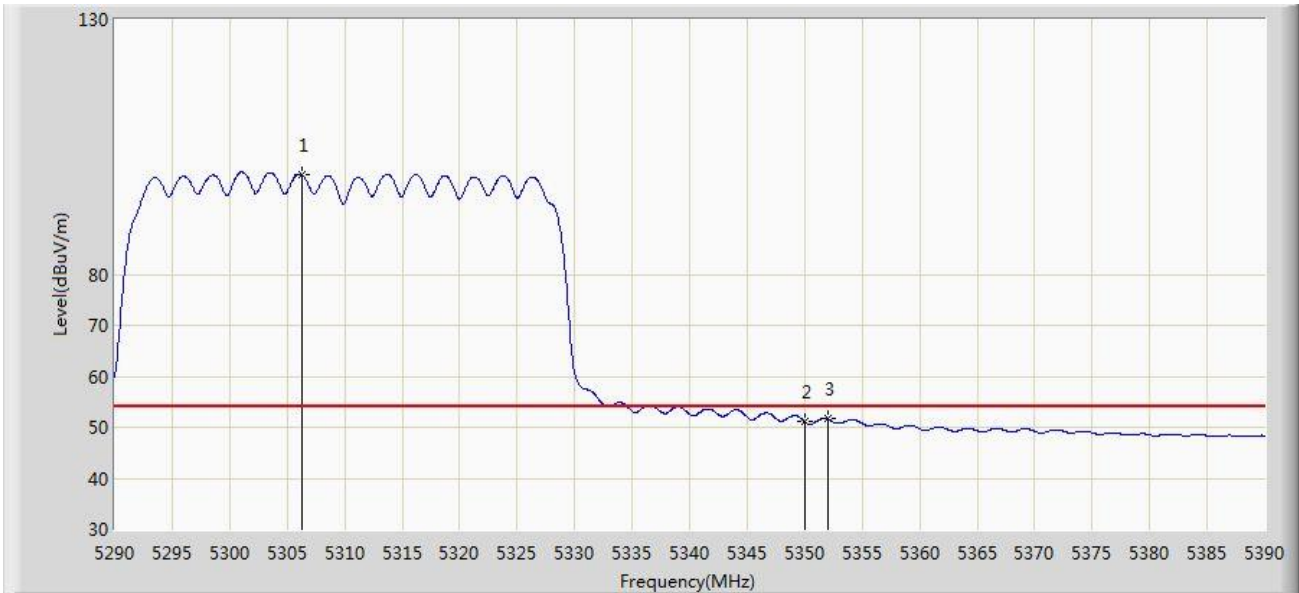


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5306.300        | 99.456                 | 95.449               | N/A         | N/A            | 4.007       | AV   |
| 2  |      |      | 5350.000        | 51.121                 | 47.077               | -2.879      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5352.000        | 51.596                 | 47.550               | -2.404      | 54.000         | 4.046       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:42 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1 |                          |

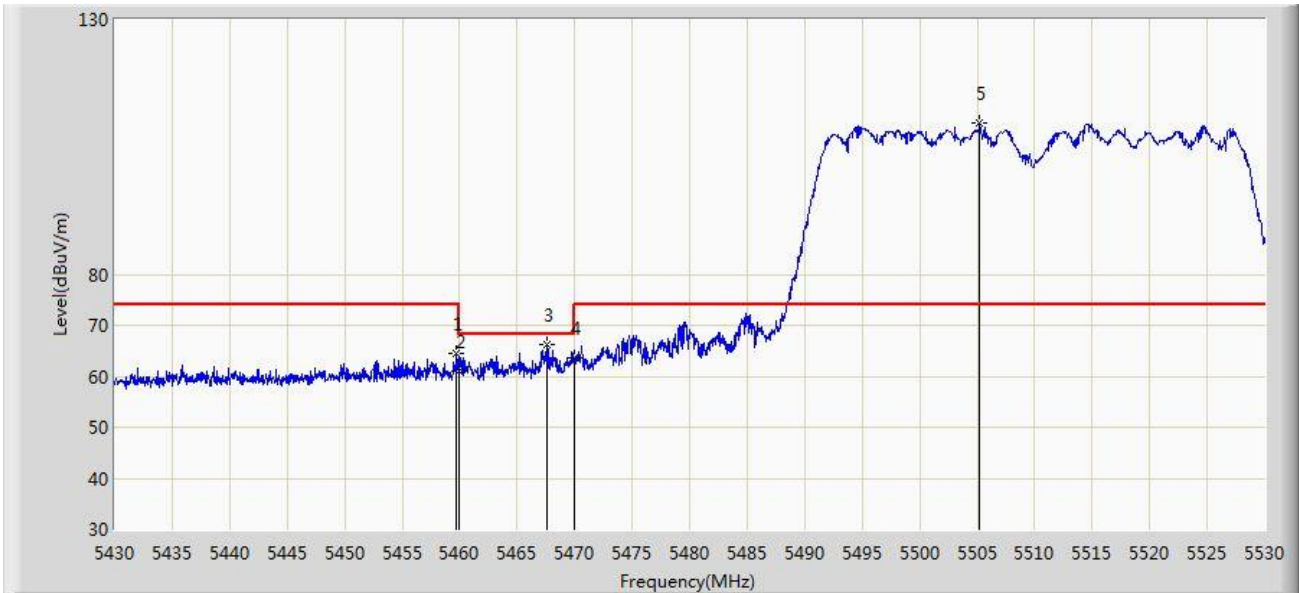


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5459.750        | 64.381                 | 60.245               | -9.619      | 74.000         | 4.136       | PK   |
| 2  |      |      | 5460.000        | 60.896                 | 56.760               | -13.104     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5467.650        | 66.301                 | 62.159               | -1.899      | 68.200         | 4.142       | PK   |
| 4  |      |      | 5470.000        | 63.703                 | 59.559               | -4.497      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5505.250        | 109.767                | 105.577              | N/A         | N/A            | 4.190       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:43 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1 |                          |

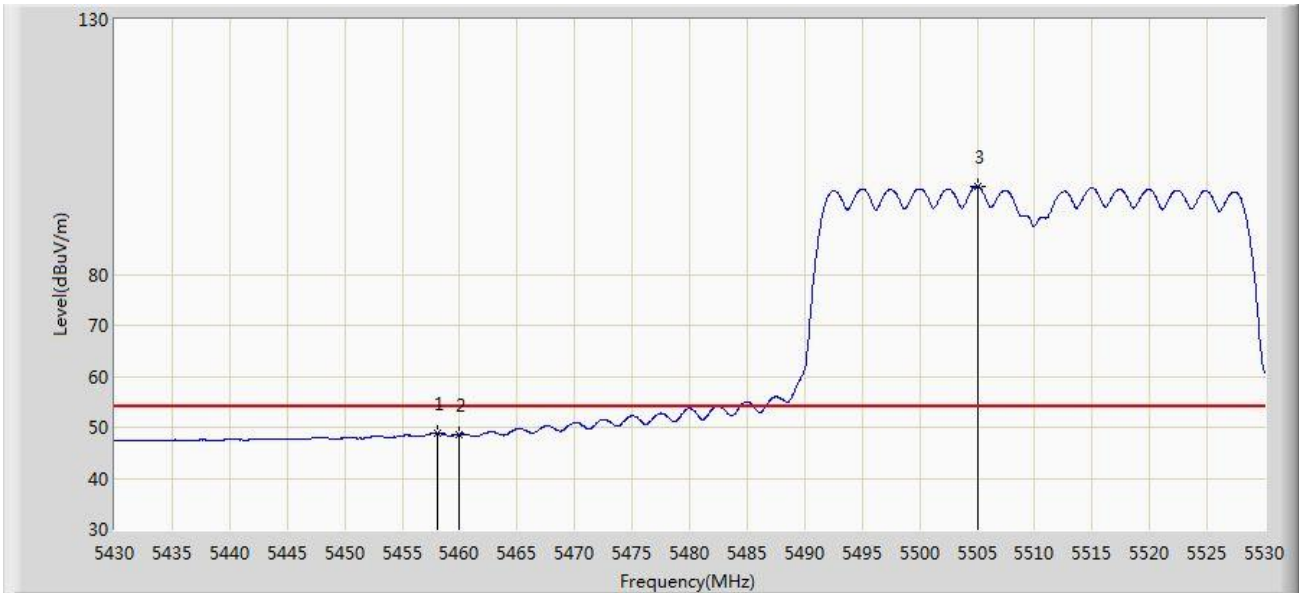


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5458.100        | 48.880                 | 44.746               | -5.120      | 54.000         | 4.134       | AV   |
| 2  |      |      | 5460.000        | 48.688                 | 44.552               | -5.312      | 54.000         | 4.136       | AV   |
| 3  |      | *    | 5505.000        | 97.250                 | 93.061               | N/A         | N/A            | 4.189       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1 |                          |

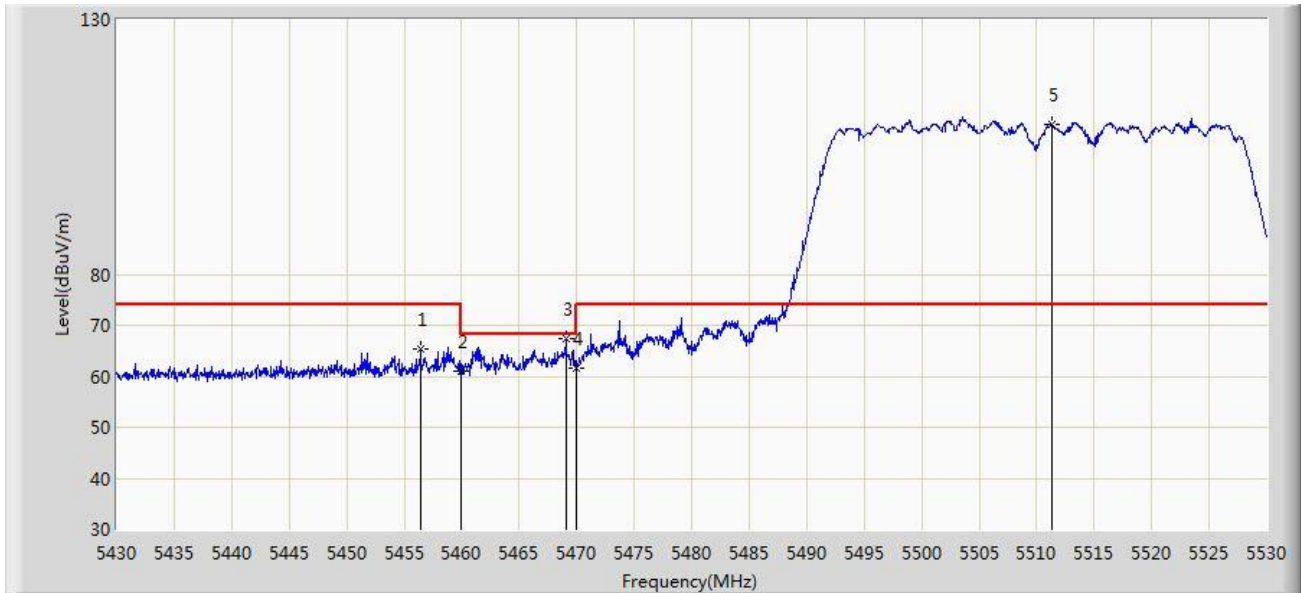


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.450        | 65.363                 | 61.230               | -8.637      | 74.000         | 4.133       | PK   |
| 2  |      |      | 5460.000        | 60.953                 | 56.817               | -13.047     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5469.050        | 67.505                 | 63.371               | -0.685      | 68.200         | 4.144       | PK   |
| 4  |      |      | 5470.000        | 61.638                 | 57.494               | -6.562      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5511.300        | 109.529                | 105.315              | N/A         | N/A            | 4.213       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:41 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1 |                          |

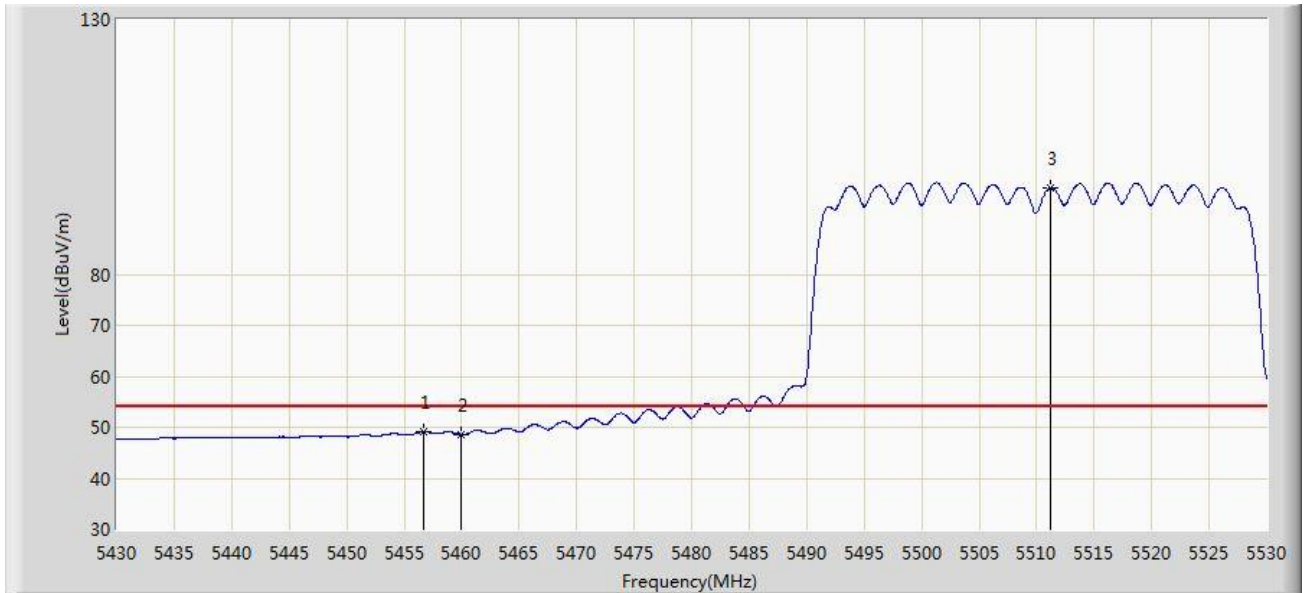


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.650        | 49.114                 | 44.981               | -4.886      | 54.000         | 4.133       | AV   |
| 2  |      |      | 5460.000        | 48.520                 | 44.384               | -5.480      | 54.000         | 4.136       | AV   |
| 3  |      | *    | 5511.150        | 96.936                 | 92.723               | N/A         | N/A            | 4.213       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:48 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1 |                          |

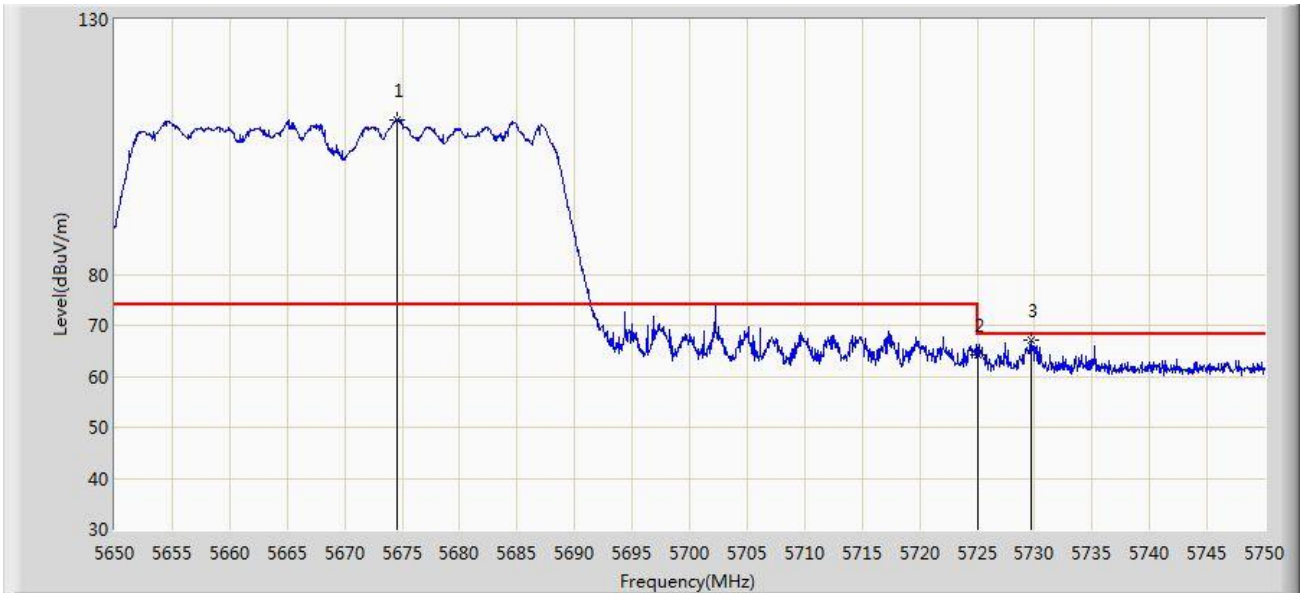


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5674.550        | 110.299                | 105.459              | N/A         | N/A            | 4.840       | PK   |
| 2  |      |      | 5725.000        | 64.073                 | 59.039               | -4.127      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5729.650        | 66.960                 | 61.908               | -1.240      | 68.200         | 5.052       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 06:50 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1 |                          |

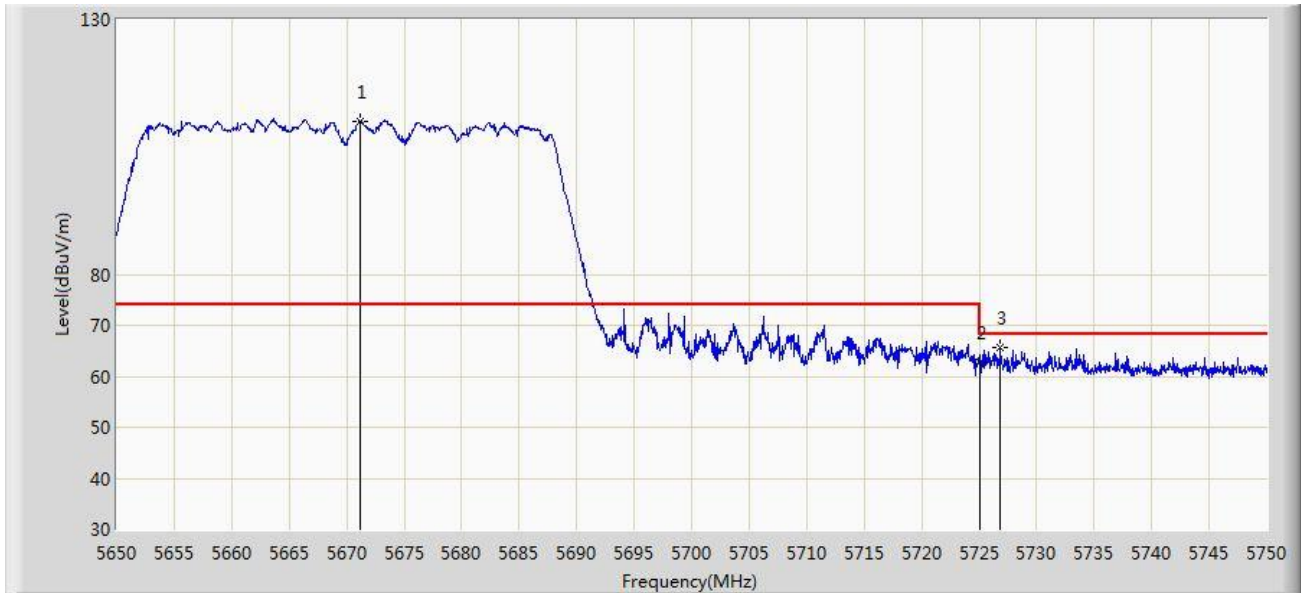


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5671.150        | 110.015                | 105.188              | N/A         | N/A            | 4.827       | PK   |
| 2  |      |      | 5725.000        | 62.875                 | 57.841               | -5.325      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5726.850        | 65.714                 | 60.673               | -2.486      | 68.200         | 5.040       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:37 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1 |                          |

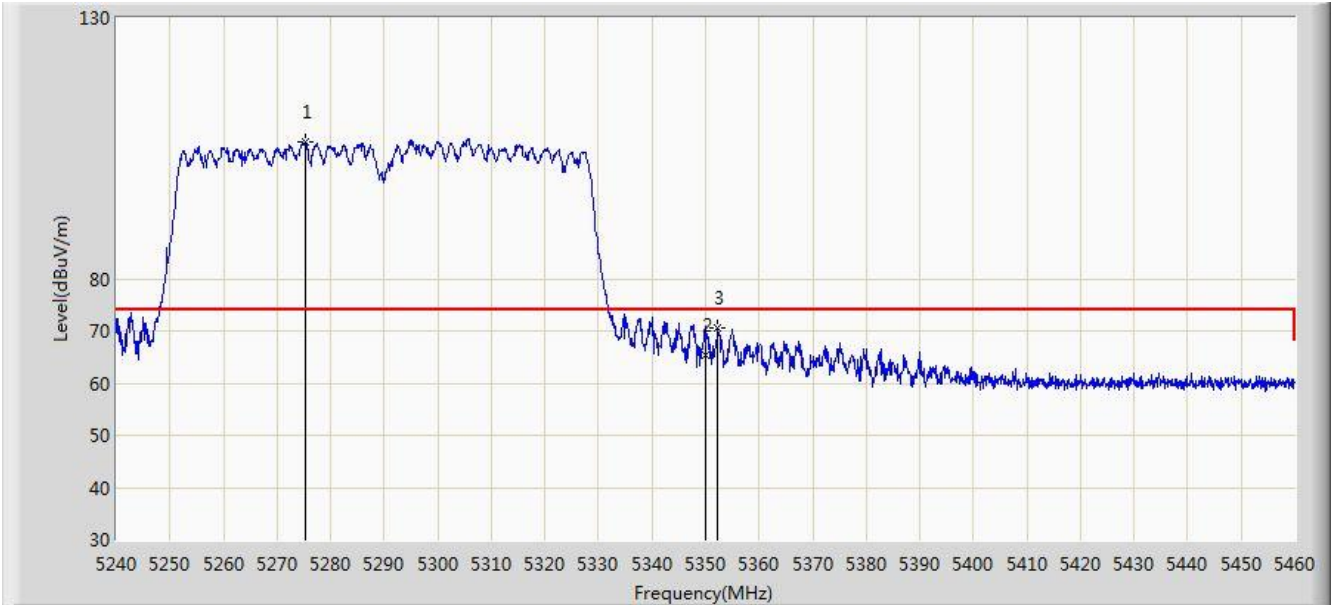


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5275.420        | 106.323                | 102.342              | N/A         | N/A            | 3.981       | PK   |
| 2  |      |      | 5350.000        | 65.416                 | 61.372               | -8.584      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5352.200        | 70.696                 | 66.650               | -3.304      | 74.000         | 4.046       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:38 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1 |                          |

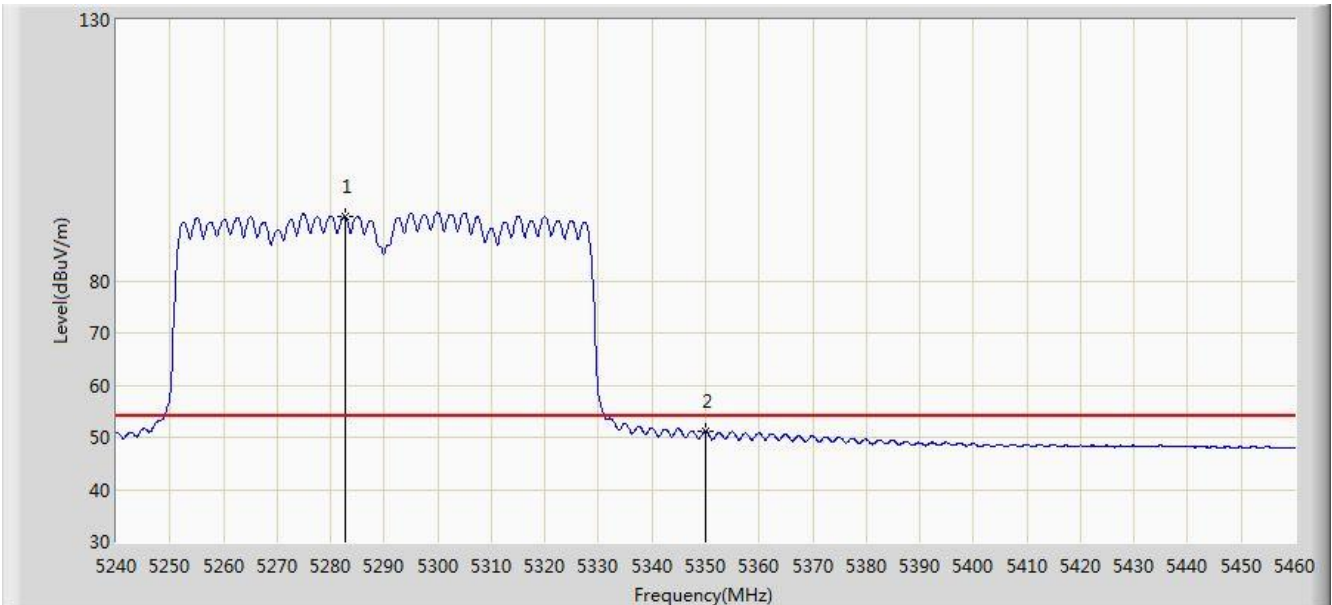


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5282.680        | 92.301                 | 88.314               | N/A         | N/A            | 3.987       | AV   |
| 2  |      |      | 5350.000        | 51.245                 | 47.201               | -2.755      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:37 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1 |                          |

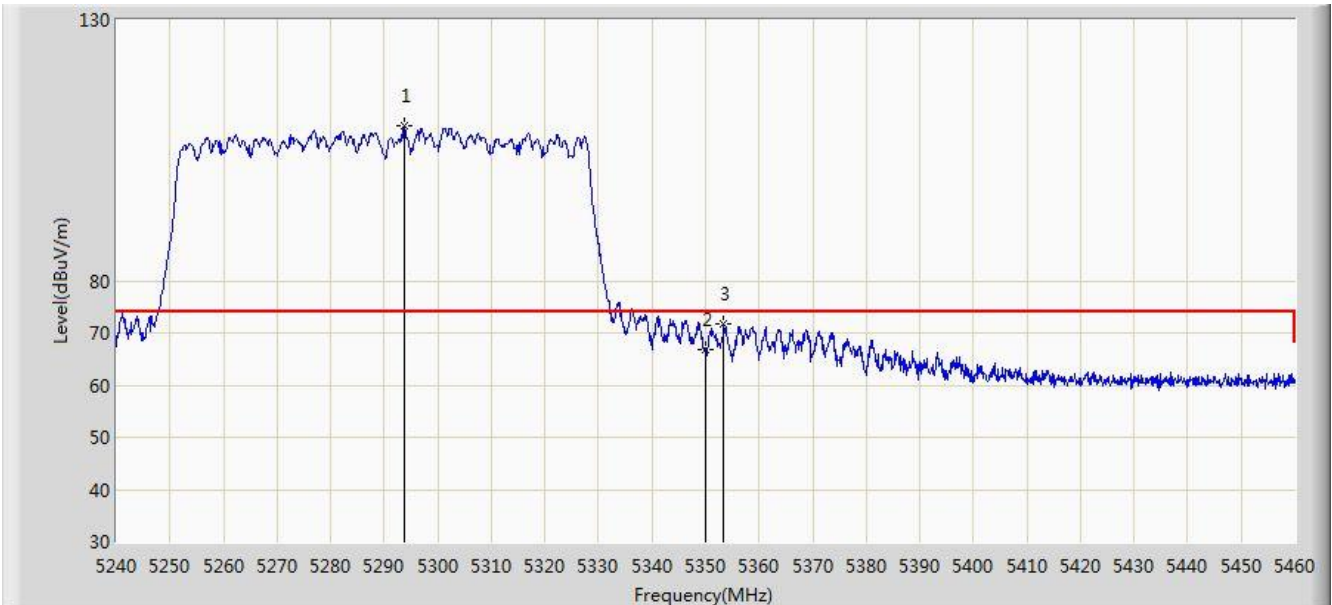


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5293.680        | 109.646                | 105.650              | N/A         | N/A            | 3.996       | PK   |
| 2  |      |      | 5350.000        | 66.722                 | 62.678               | -7.278      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5353.410        | 71.827                 | 67.780               | -2.173      | 74.000         | 4.047       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:36 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1 |                          |

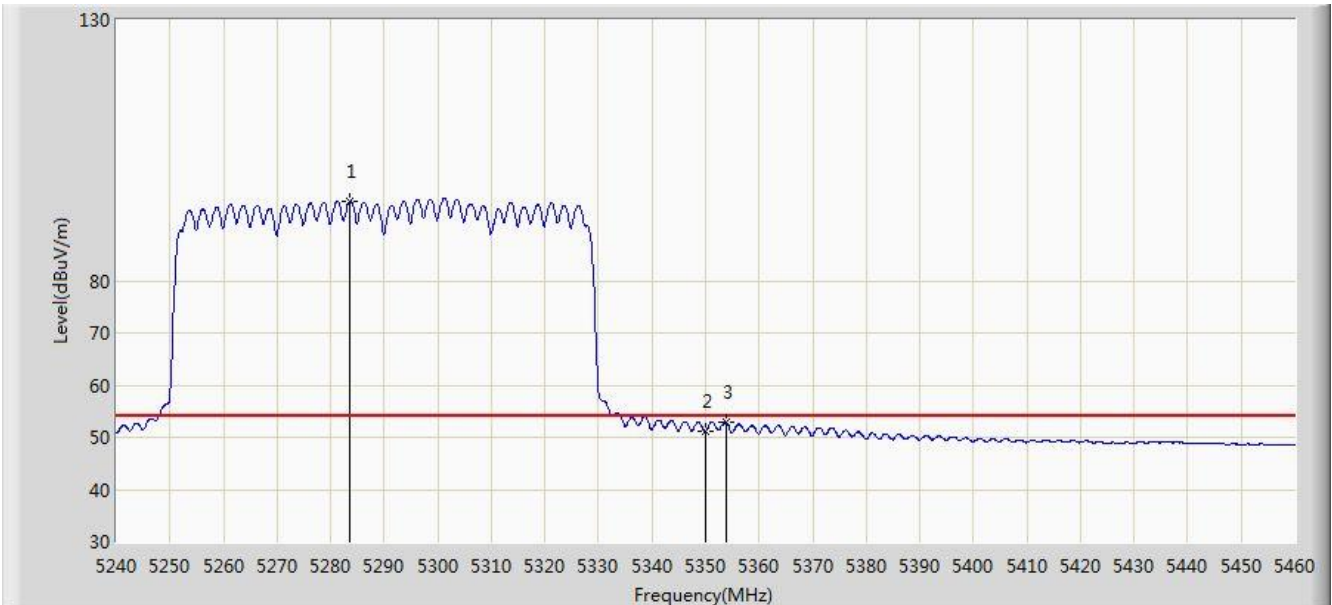


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5283.560        | 95.131                 | 91.143               | N/A         | N/A            | 3.988       | AV   |
| 2  |      |      | 5350.000        | 51.041                 | 46.997               | -2.959      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5353.850        | 52.847                 | 48.799               | -1.153      | 54.000         | 4.048       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:42 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1 |                          |

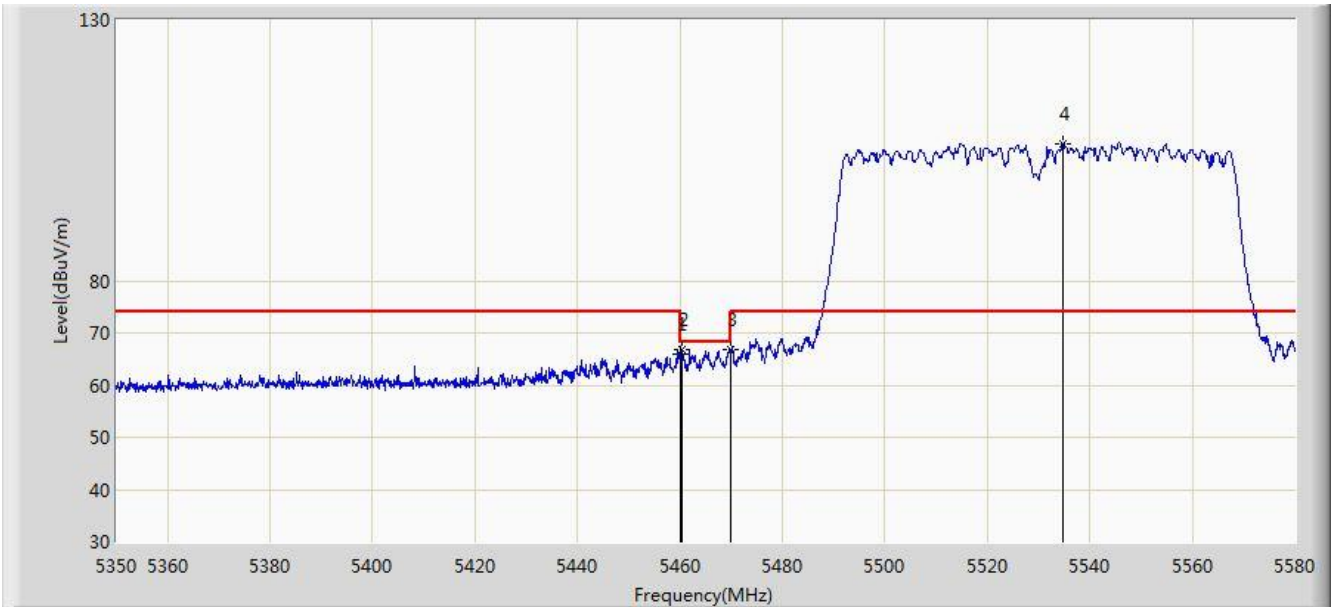


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 65.872                 | 61.736               | -8.128      | 74.000         | 4.136       | PK   |
| 2  |      |      | 5460.285        | 66.673                 | 62.537               | -1.527      | 68.200         | 4.136       | PK   |
| 3  |      |      | 5470.000        | 66.743                 | 62.599               | -1.457      | 68.200         | 4.144       | PK   |
| 4  |      | *    | 5534.805        | 106.272                | 101.968              | N/A         | N/A            | 4.304       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:44 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1 |                          |

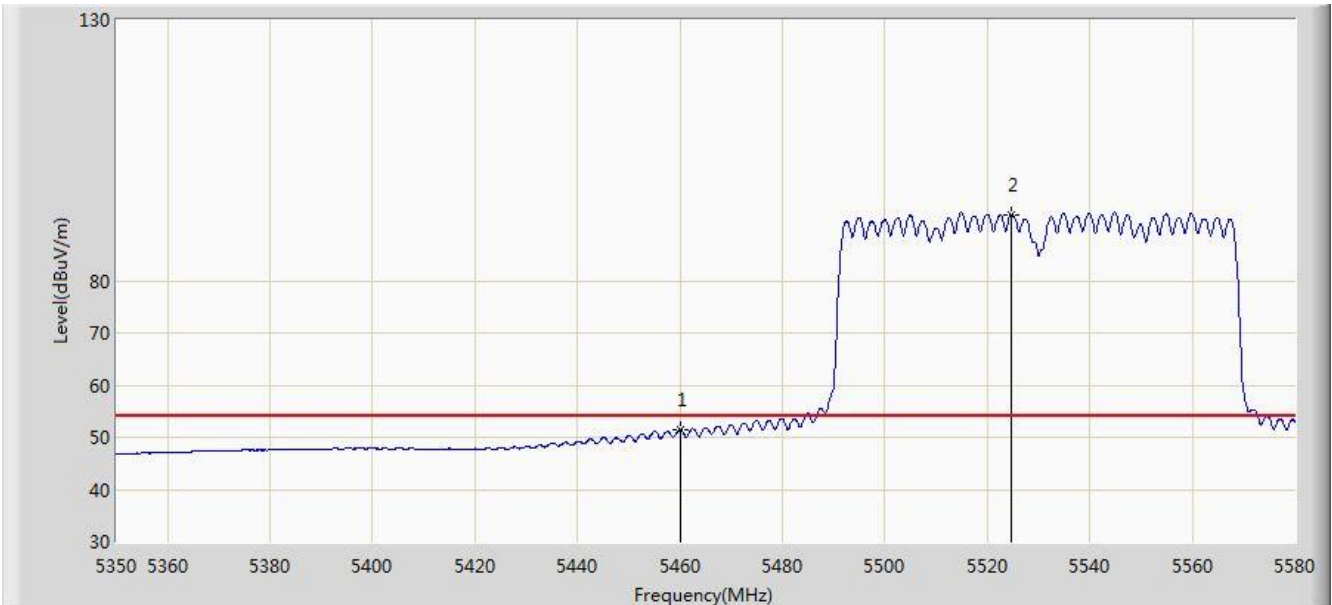


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 51.477                 | 47.341               | -2.523      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5524.570        | 92.646                 | 88.381               | N/A         | N/A            | 4.265       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:45 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1 |                          |

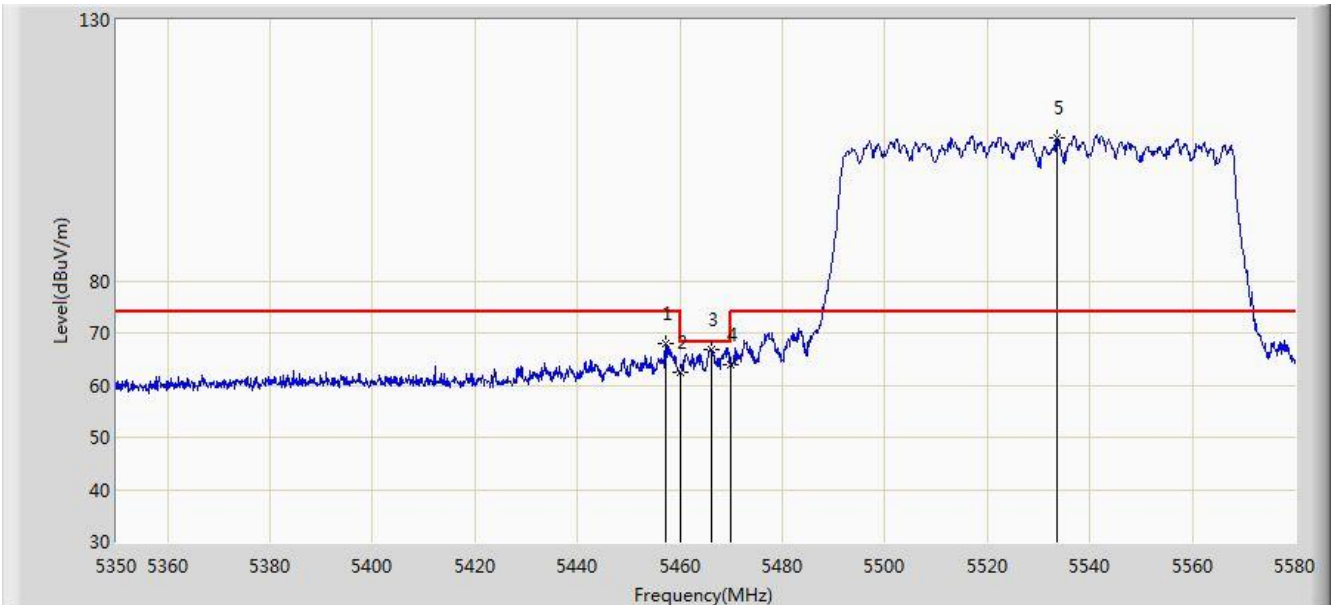


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5457.180        | 67.980                 | 63.846               | -6.020      | 74.000         | 4.134       | PK   |
| 2  |      |      | 5460.000        | 62.412                 | 58.276               | -11.588     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5466.035        | 66.885                 | 62.744               | -1.315      | 68.200         | 4.141       | PK   |
| 4  |      |      | 5470.000        | 64.045                 | 59.901               | -4.155      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5533.655        | 107.502                | 103.203              | N/A         | N/A            | 4.299       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:46 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1 |                          |

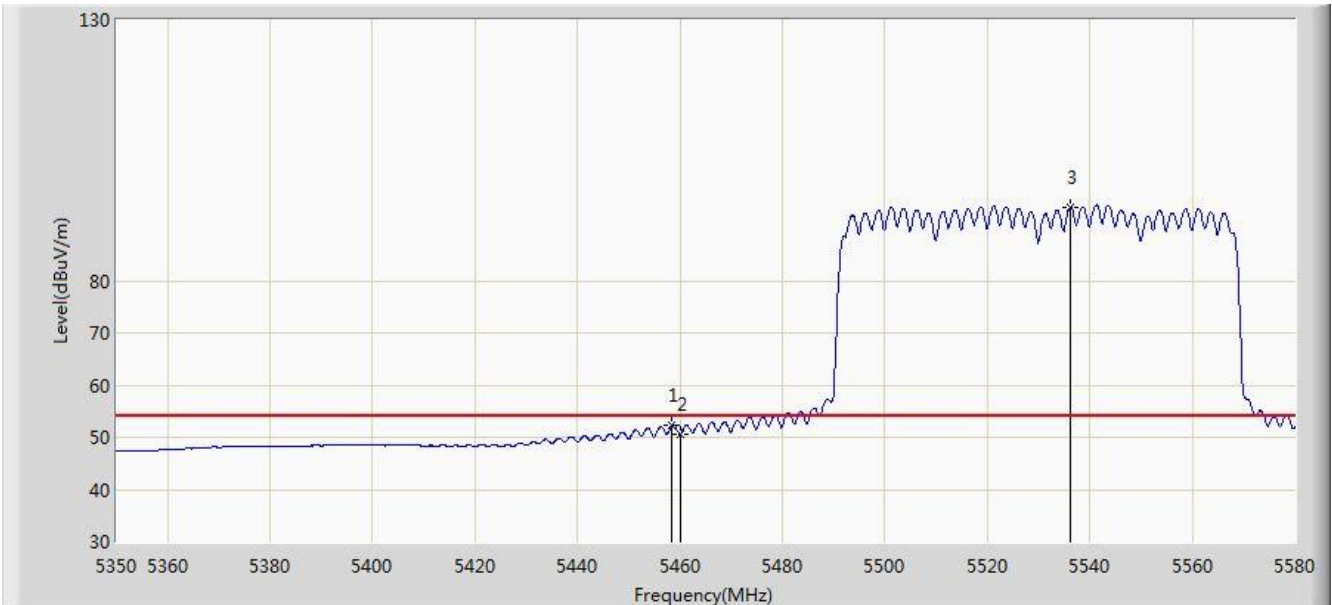


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5458.445        | 52.223                 | 48.088               | -1.777      | 54.000         | 4.135       | AV   |
| 2  |      |      | 5460.000        | 50.491                 | 46.355               | -3.509      | 54.000         | 4.136       | AV   |
| 3  |      | *    | 5536.185        | 94.031                 | 89.722               | N/A         | N/A            | 4.309       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:50 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1 |                          |

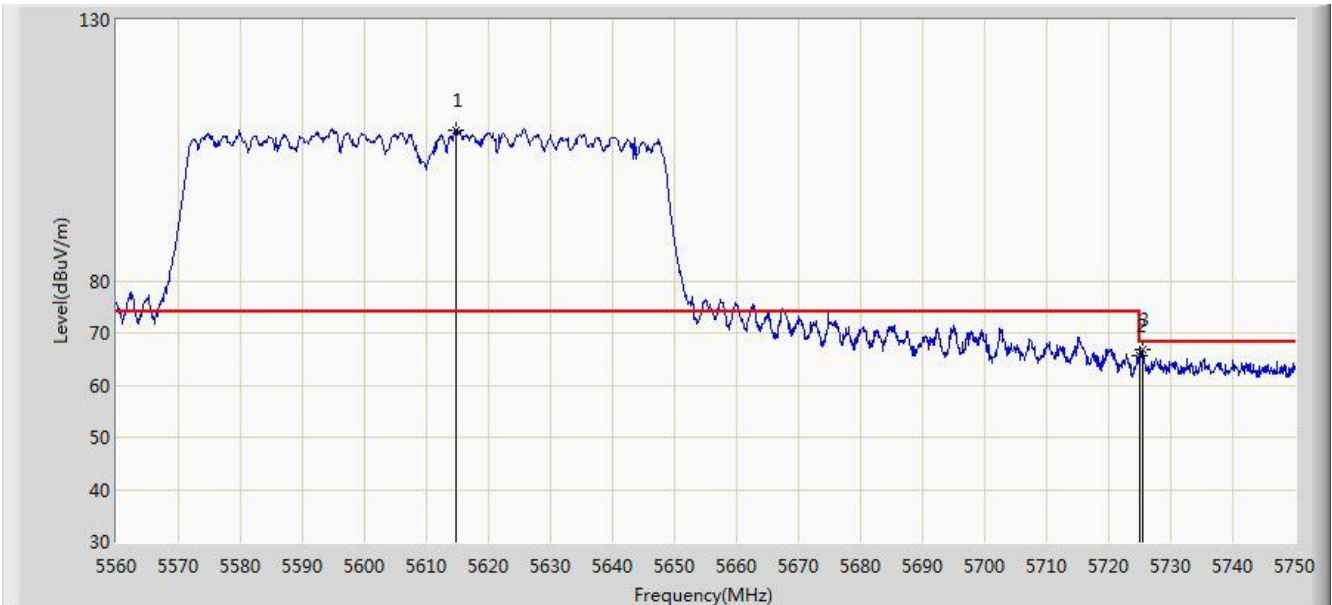


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5614.815        | 108.896                | 104.286              | N/A         | N/A            | 4.611       | PK   |
| 2  |      |      | 5725.000        | 65.637                 | 60.603               | -2.563      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5725.585        | 66.745                 | 61.709               | -1.455      | 68.200         | 5.036       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/07/11 - 07:52 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1 |                          |

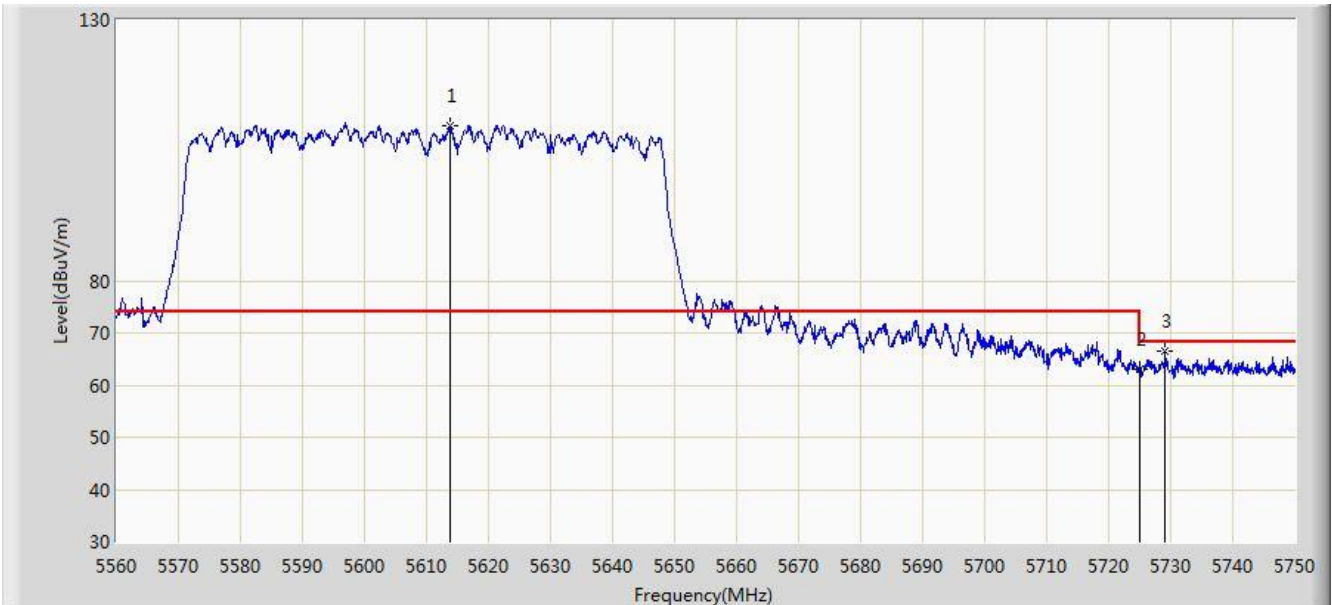


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5613.770        | 109.760                | 105.154              | N/A         | N/A            | 4.606       | PK   |
| 2  |      |      | 5725.000        | 63.131                 | 58.097               | -5.069      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5729.100        | 66.544                 | 61.494               | -1.656      | 68.200         | 5.049       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 08:50 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1 |                          |

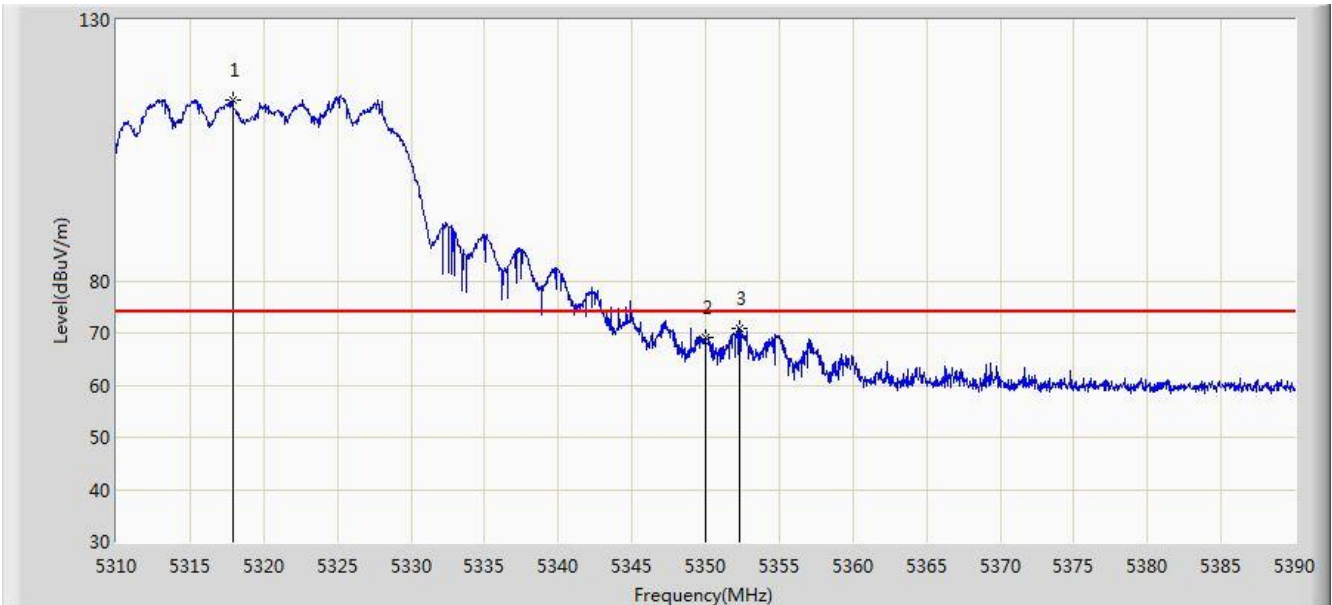


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5317.880        | 114.733                | 110.716              | N/A         | N/A            | 4.017       | PK   |
| 2  |      |      | 5350.000        | 69.085                 | 65.041               | -4.915      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5352.320        | 70.862                 | 66.816               | -3.138      | 74.000         | 4.046       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 08:52 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1 |                          |

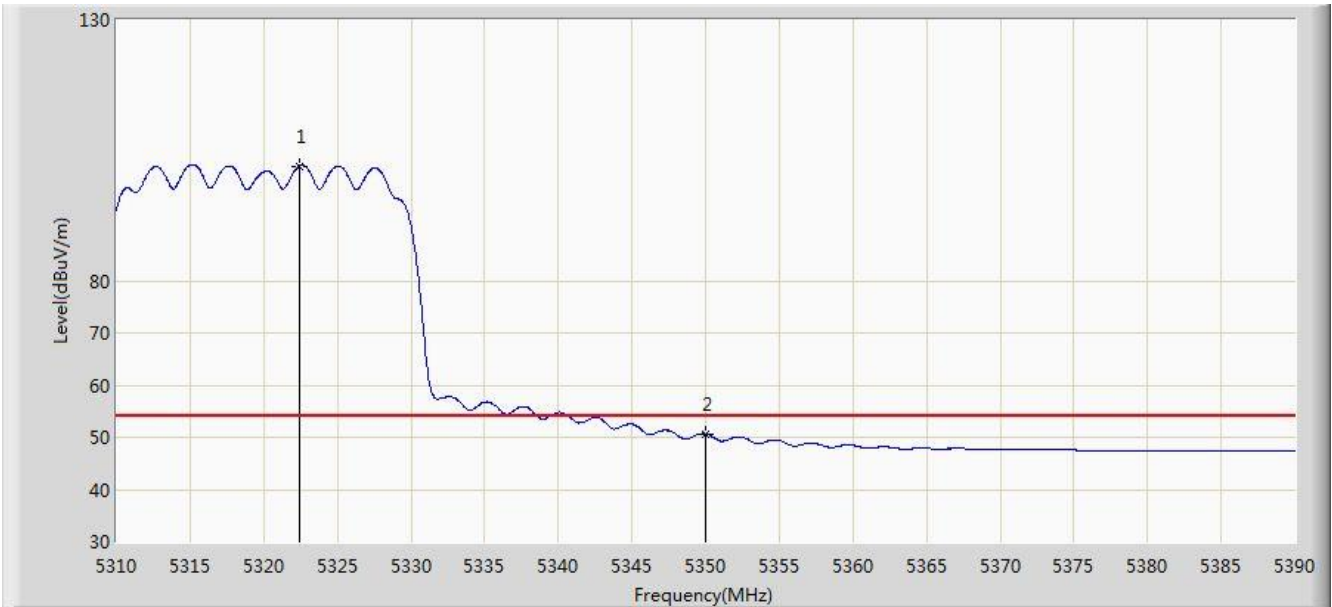


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.400        | 101.929                | 97.908               | N/A         | N/A            | 4.021       | AV   |
| 2  |      |      | 5350.000        | 50.644                 | 46.600               | -3.356      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 08:46 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1 |                          |

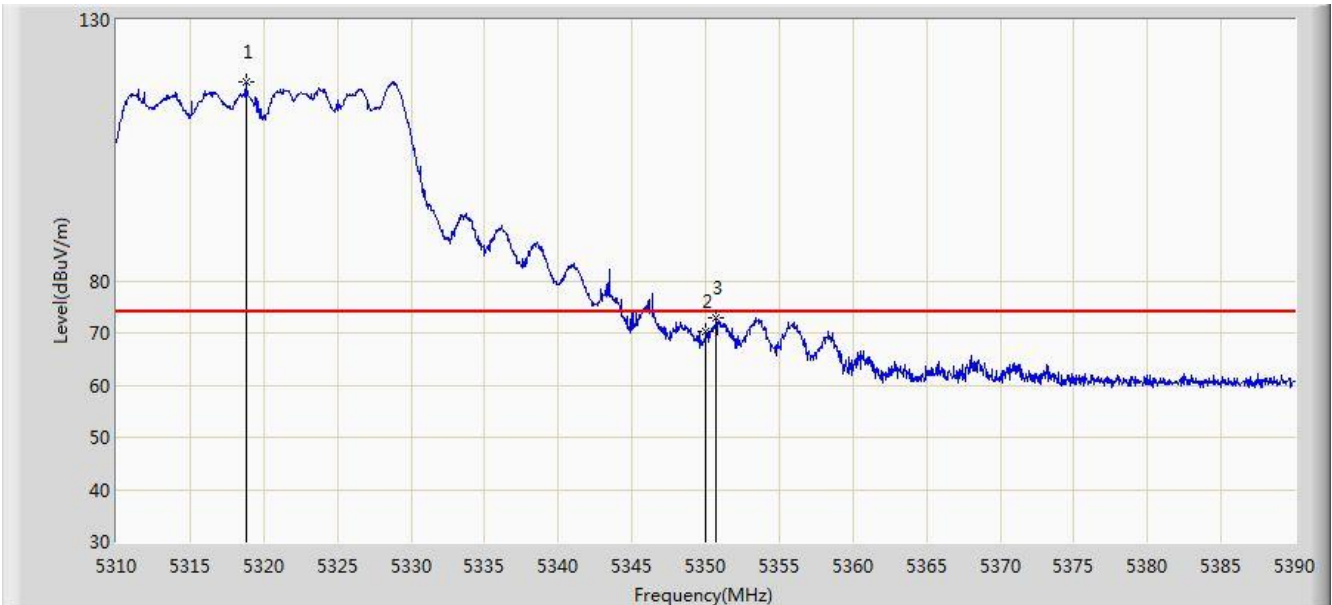


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5318.800        | 118.040                | 114.022              | N/A         | N/A            | 4.018       | PK   |
| 2  |      |      | 5350.000        | 70.224                 | 66.180               | -3.776      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5350.720        | 72.825                 | 68.780               | -1.175      | 74.000         | 4.045       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 08:48 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1 |                          |

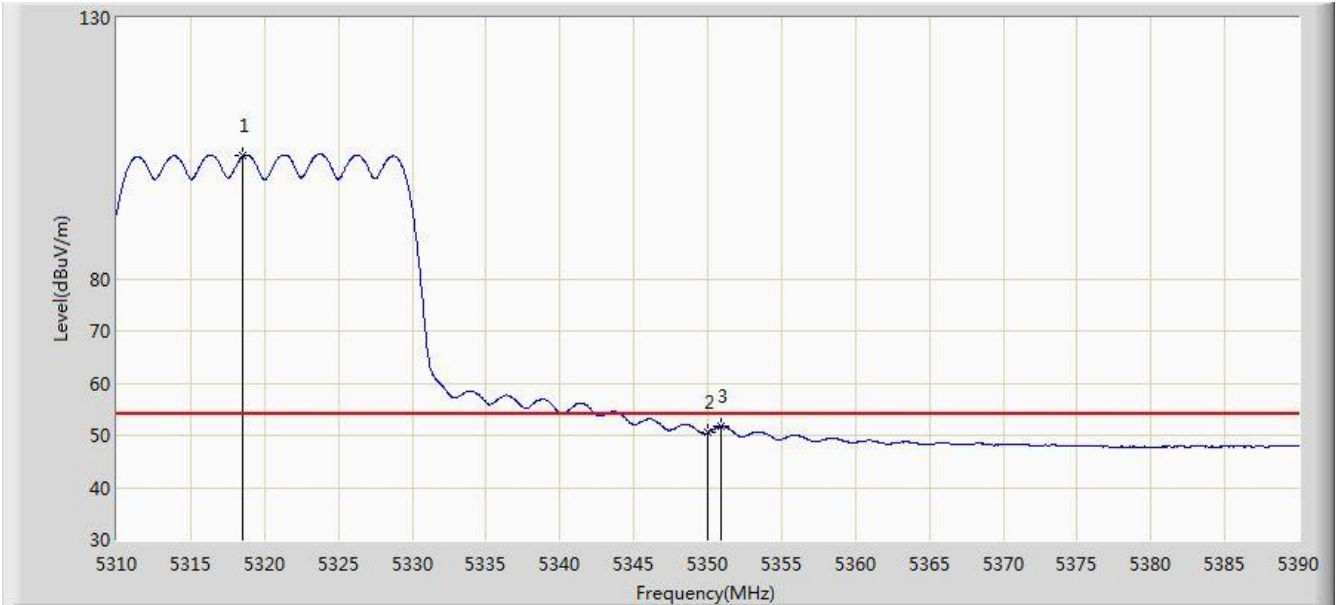


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5318.560        | 103.508                | 99.490               | N/A         | N/A            | 4.018       | AV   |
| 2  |      |      | 5350.000        | 50.502                 | 46.458               | -3.498      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5350.880        | 51.684                 | 47.639               | -2.316      | 54.000         | 4.045       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 21:58 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

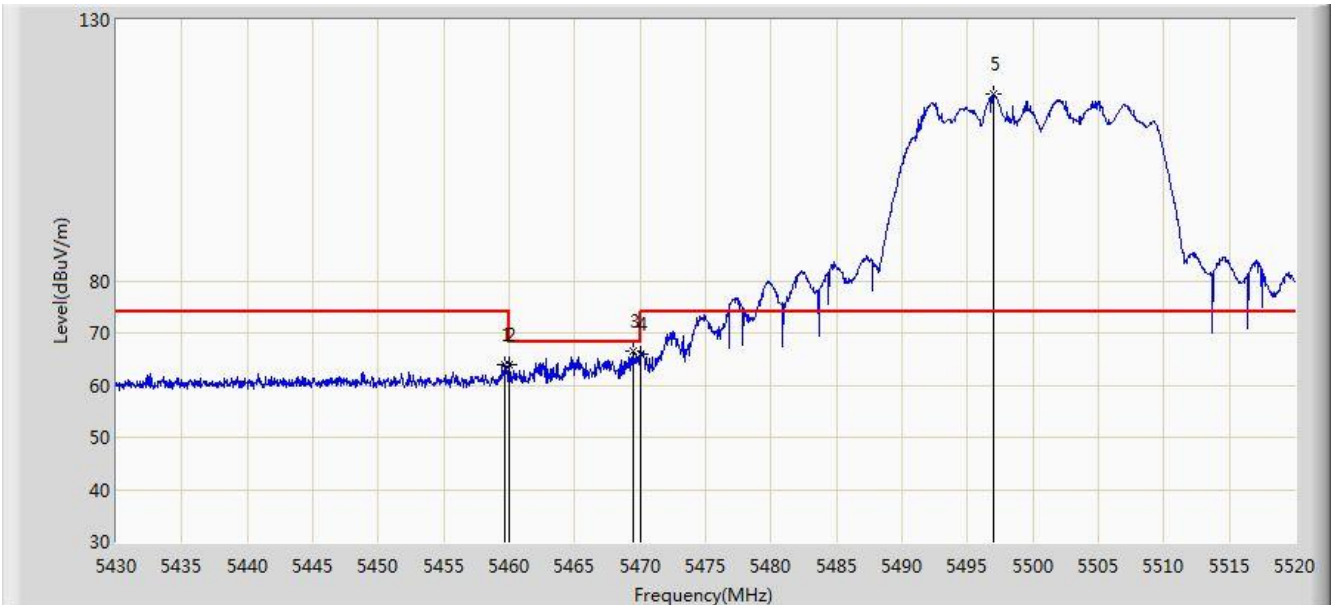


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5459.610        | 63.922                 | 59.786               | -10.078     | 74.000         | 4.136       | PK   |
| 2  |      |      | 5460.000        | 63.781                 | 59.645               | -10.219     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5469.465        | 66.613                 | 62.469               | -1.587      | 68.200         | 4.144       | PK   |
| 4  |      |      | 5470.000        | 66.022                 | 61.878               | -2.178      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5496.960        | 115.660                | 111.484              | N/A         | N/A            | 4.176       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 21:59 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

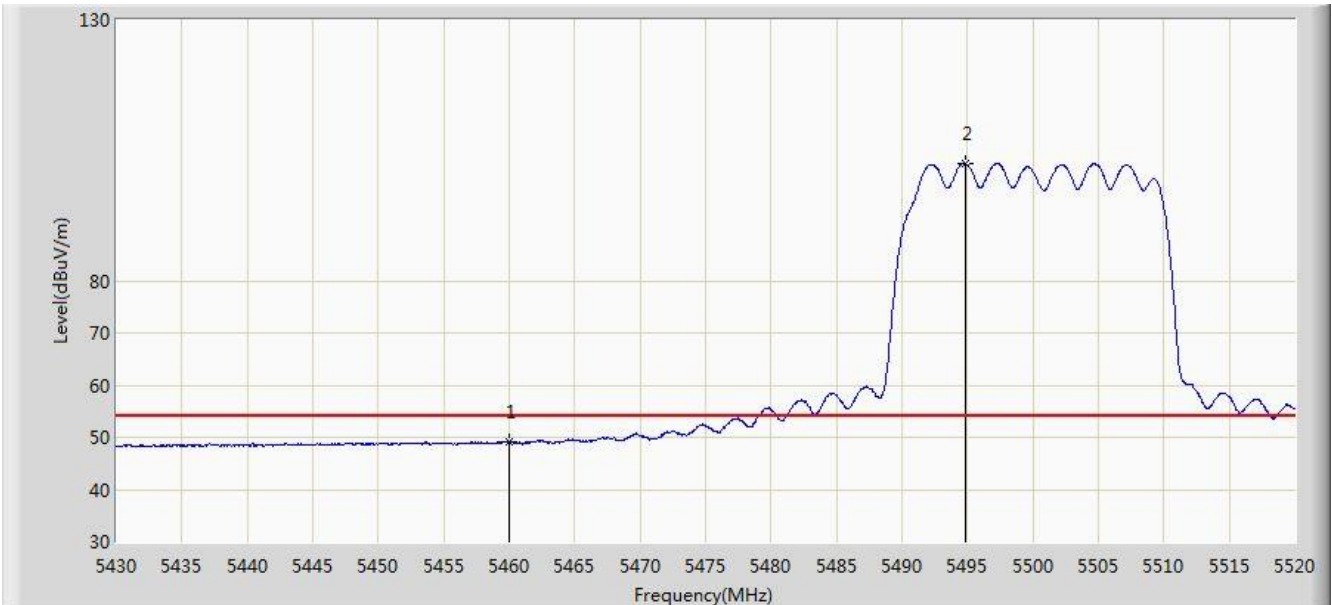


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 49.027                 | 44.891               | -4.973      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5494.800        | 102.540                | 98.368               | N/A         | N/A            | 4.172       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 21:54 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

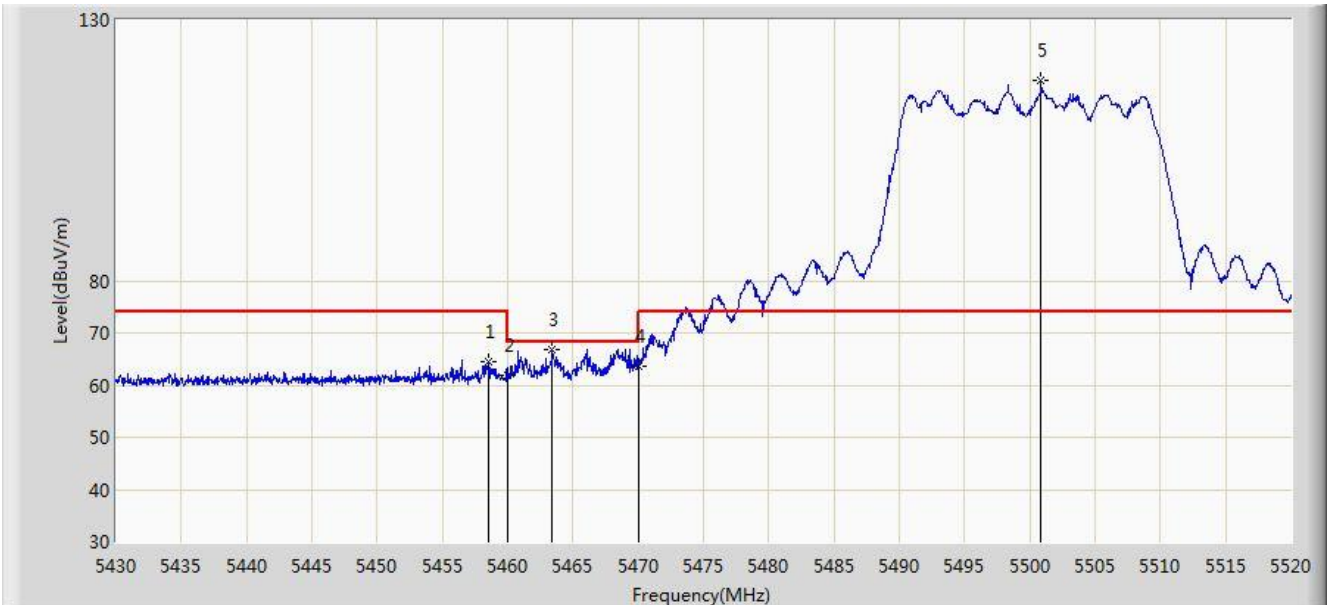


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5458.485        | 64.493                 | 60.358               | -9.507      | 74.000         | 4.135       | PK   |
| 2  |      |      | 5460.000        | 61.886                 | 57.750               | -12.114     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5463.435        | 66.873                 | 62.734               | -1.327      | 68.200         | 4.139       | PK   |
| 4  |      |      | 5470.000        | 63.507                 | 59.363               | -4.693      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5500.830        | 118.533                | 114.351              | N/A         | N/A            | 4.183       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 21:57 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1 |                          |

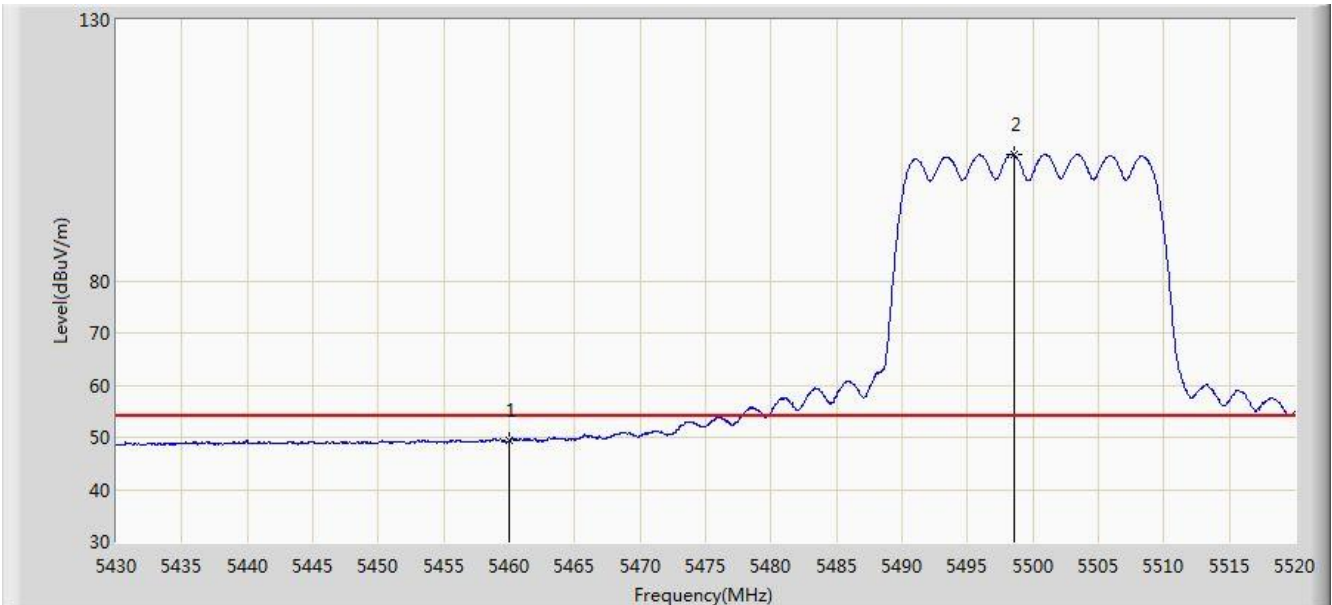


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 49.304                 | 45.168               | -4.696      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5498.535        | 104.116                | 99.938               | N/A         | N/A            | 4.179       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:04 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz Ant 0 + 1 |                          |

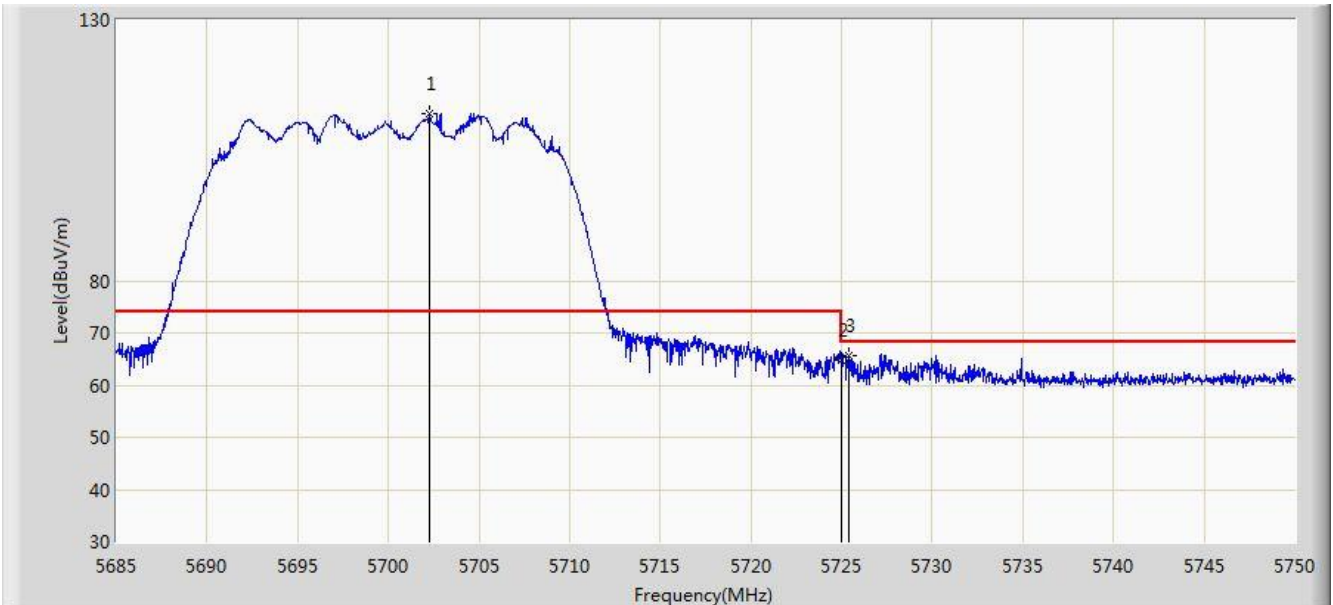


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5702.290        | 112.072                | 107.125              | N/A         | N/A            | 4.947       | PK   |
| 2  |      |      | 5725.000        | 64.859                 | 59.825               | -3.341      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5725.397        | 65.768                 | 60.733               | -2.432      | 68.200         | 5.035       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:02 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz Ant 0 + 1 |                          |

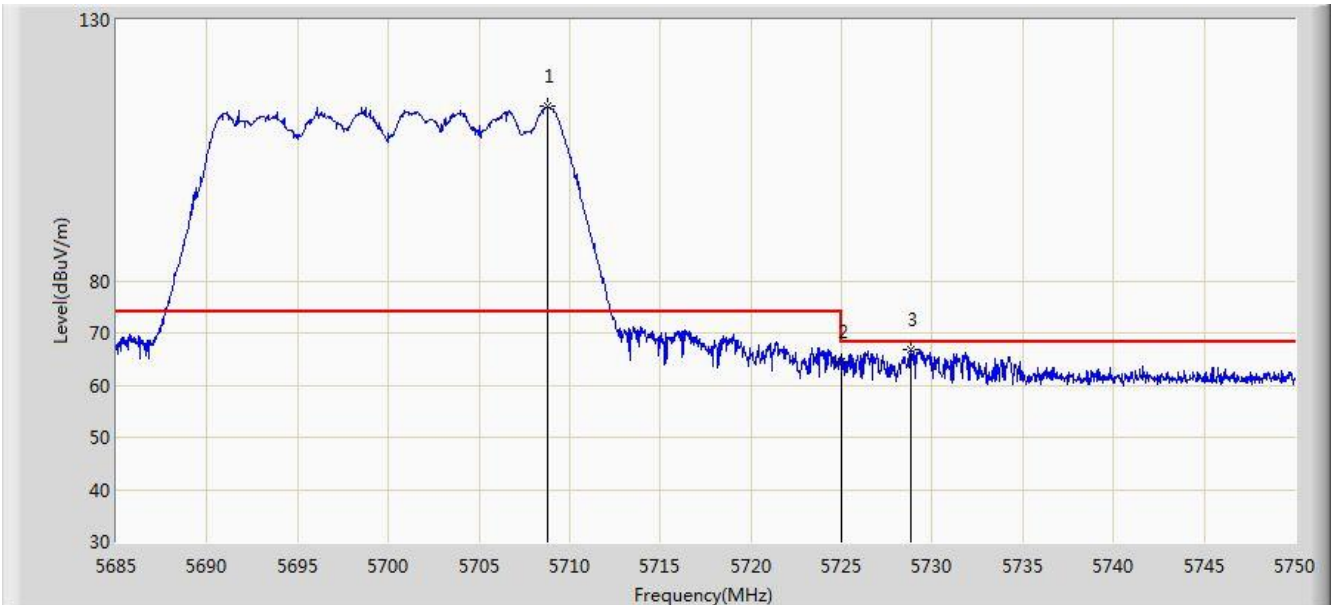


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5708.757        | 113.438                | 108.466              | N/A         | N/A            | 4.972       | PK   |
| 2  |      |      | 5725.000        | 64.463                 | 59.429               | -3.737      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5728.842        | 66.954                 | 61.905               | -1.246      | 68.200         | 5.049       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:29 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

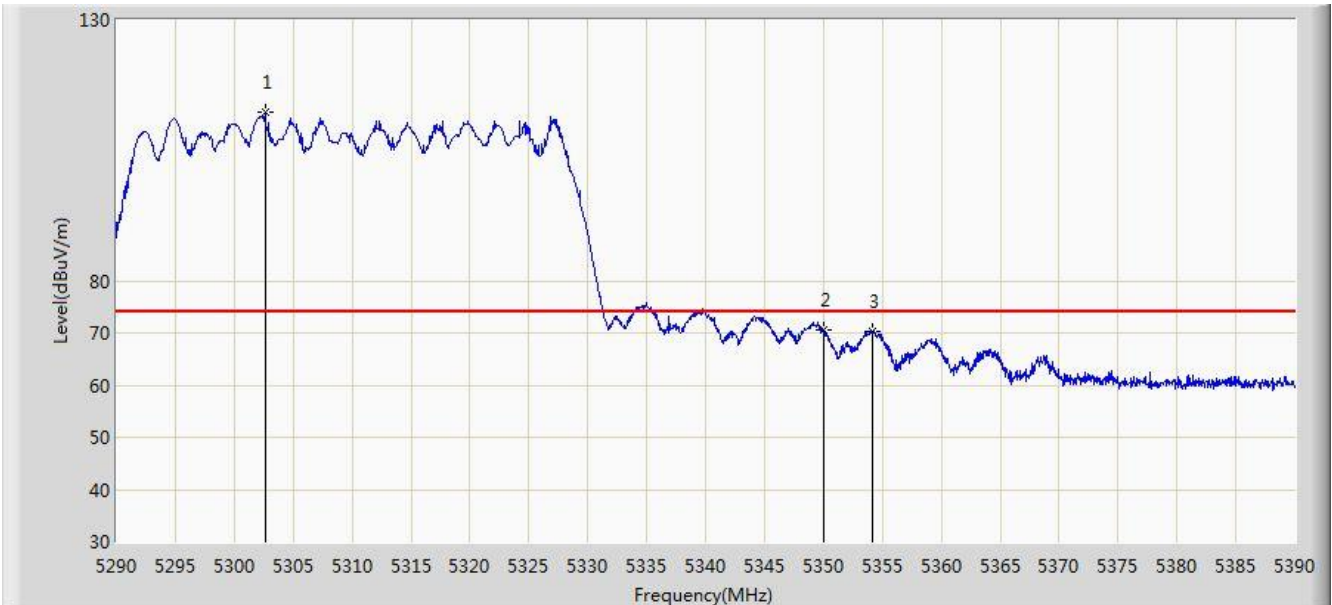


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5302.600        | 112.236                | 108.232              | N/A         | N/A            | 4.004       | PK   |
| 2  |      |      | 5350.000        | 70.659                 | 66.615               | -3.341      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5354.200        | 70.223                 | 66.175               | -3.777      | 74.000         | 4.048       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:28 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

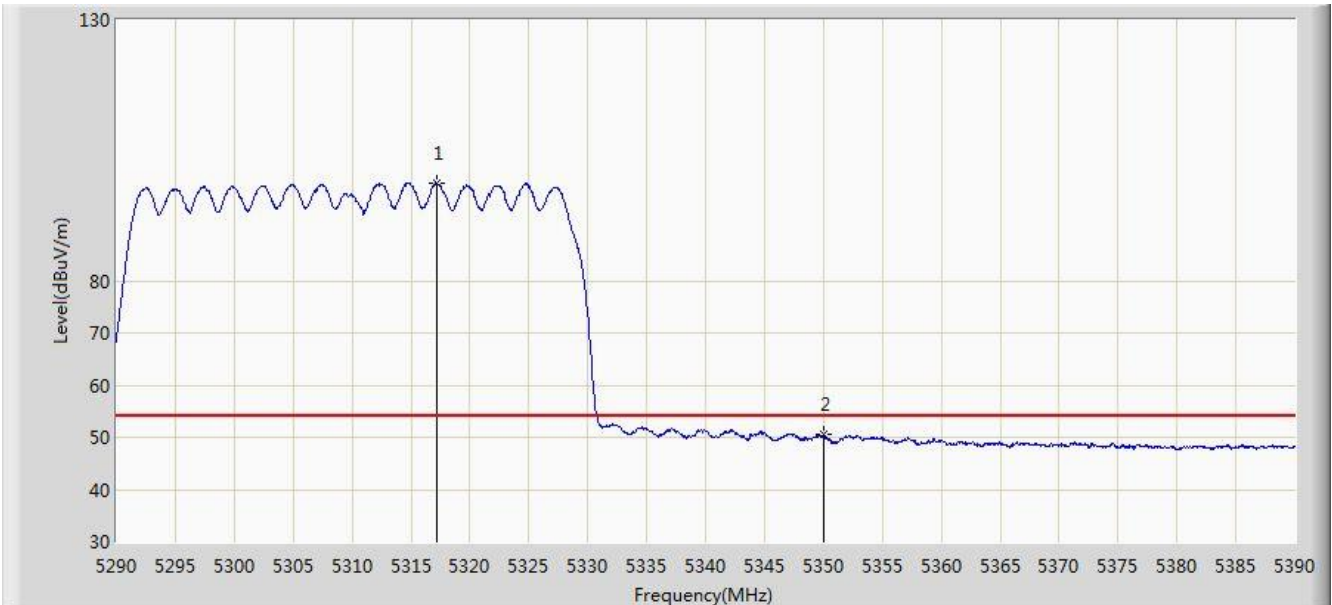


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5317.150        | 98.570                 | 94.554               | N/A         | N/A            | 4.016       | AV   |
| 2  |      |      | 5350.000        | 50.465                 | 46.421               | -3.535      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:27 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

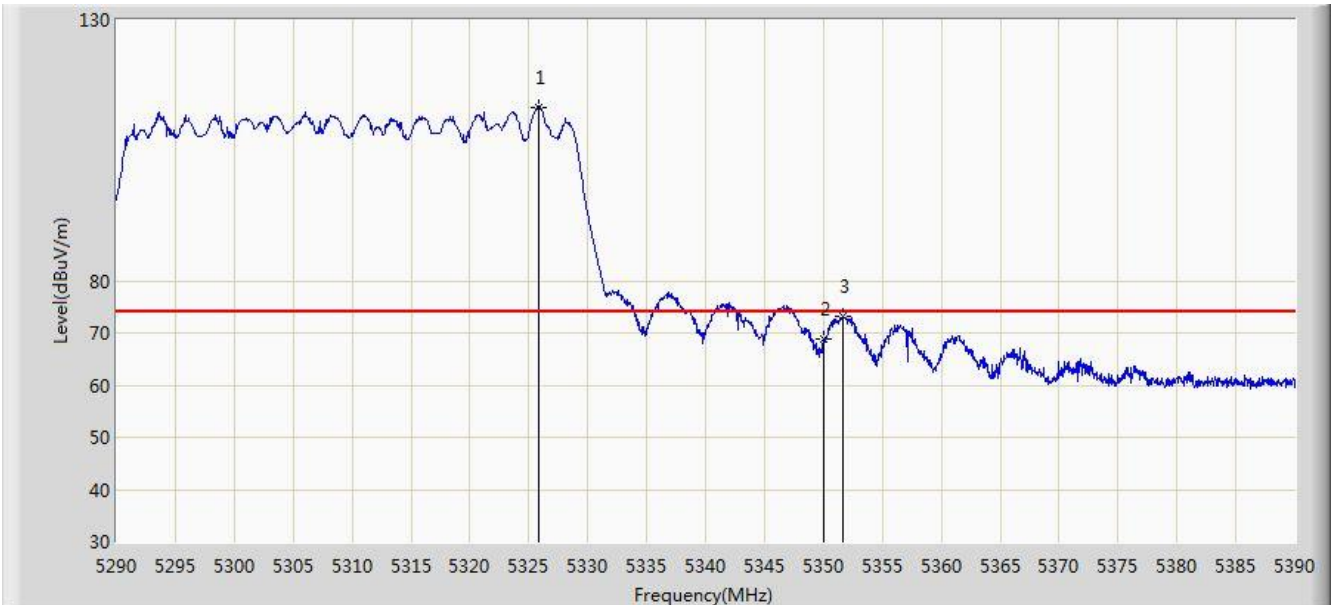


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5325.850        | 113.317                | 109.293              | N/A         | N/A            | 4.024       | PK   |
| 2  |      |      | 5350.000        | 68.830                 | 64.786               | -5.170      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5351.700        | 73.124                 | 69.078               | -0.876      | 74.000         | 4.046       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:28 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1 |                          |

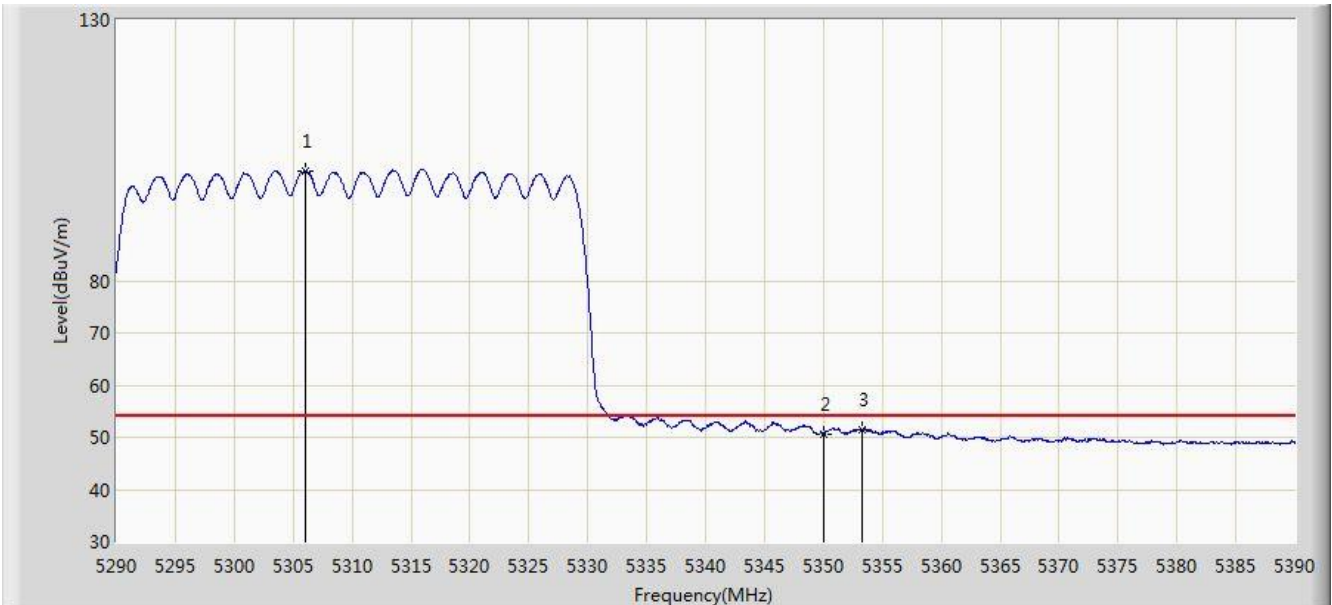


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5306.100        | 101.129                | 97.122               | N/A         | N/A            | 4.007       | AV   |
| 2  |      |      | 5350.000        | 50.673                 | 46.629               | -3.327      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5353.300        | 51.588                 | 47.541               | -2.412      | 54.000         | 4.047       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:35 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

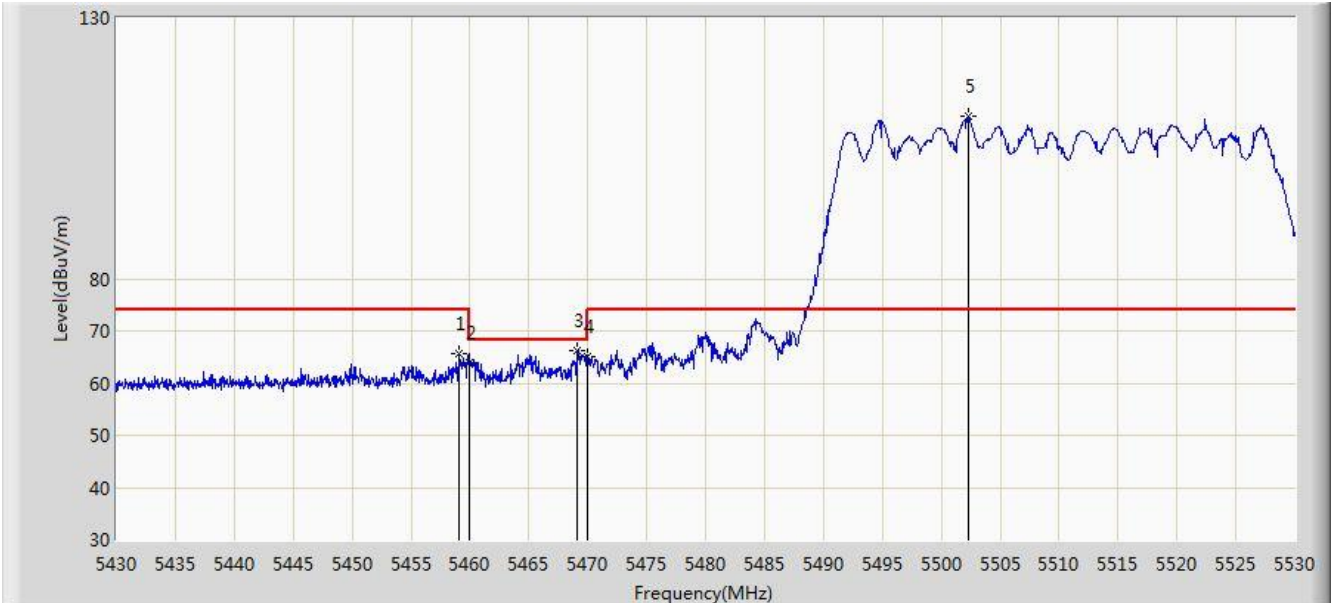


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5459.100        | 65.785                 | 61.650               | -8.215      | 74.000         | 4.135       | PK   |
| 2  |      |      | 5460.000        | 63.982                 | 59.846               | -10.018     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5469.150        | 66.199                 | 62.055               | -2.001      | 68.200         | 4.144       | PK   |
| 4  |      |      | 5470.000        | 65.140                 | 60.996               | -3.060      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5502.250        | 111.183                | 106.998              | N/A         | N/A            | 4.185       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:34 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

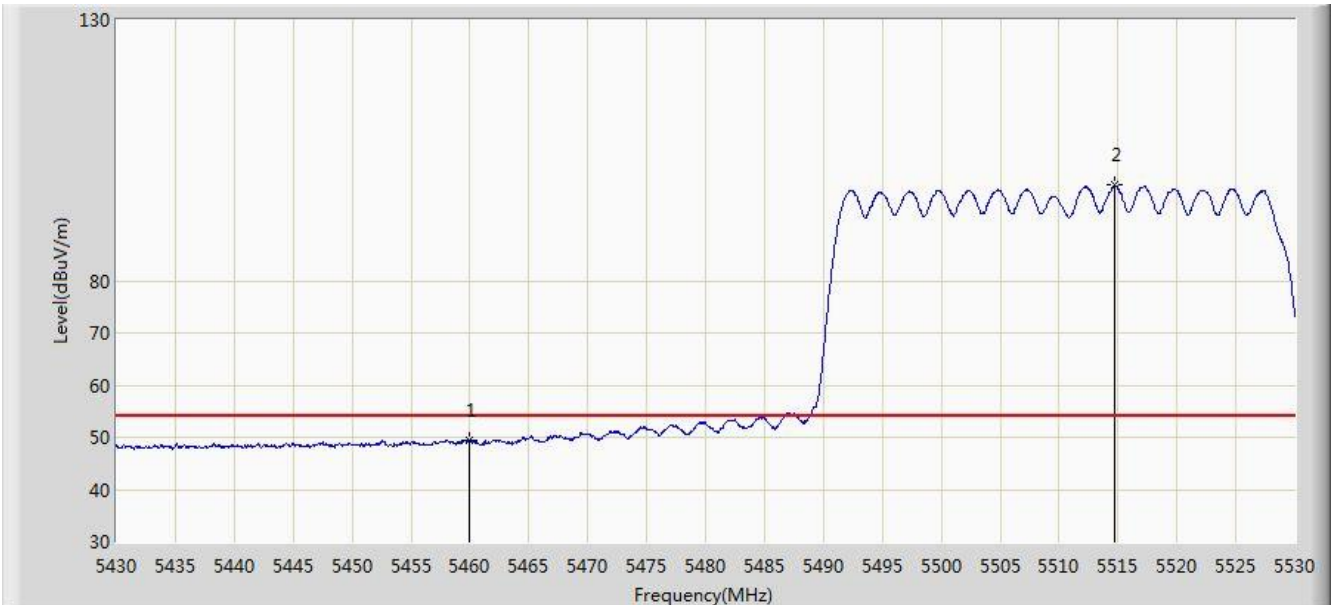


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 49.508                 | 45.372               | -4.492      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5514.700        | 98.296                 | 94.069               | N/A         | N/A            | 4.227       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:33 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

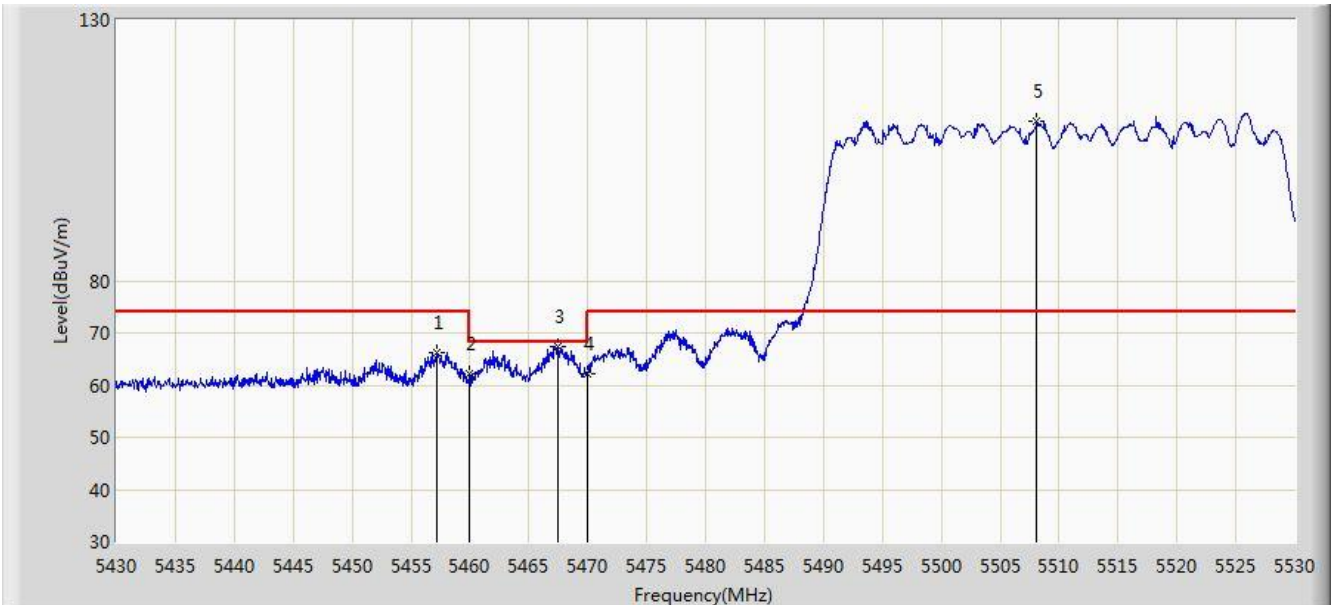


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5457.250        | 66.200                 | 62.066               | -7.800      | 74.000         | 4.134       | PK   |
| 2  |      |      | 5460.000        | 62.143                 | 58.007               | -11.857     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5467.450        | 67.504                 | 63.362               | -0.696      | 68.200         | 4.142       | PK   |
| 4  |      |      | 5470.000        | 62.238                 | 58.094               | -5.962      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5508.100        | 110.643                | 106.442              | N/A         | N/A            | 4.202       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:34 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1 |                          |

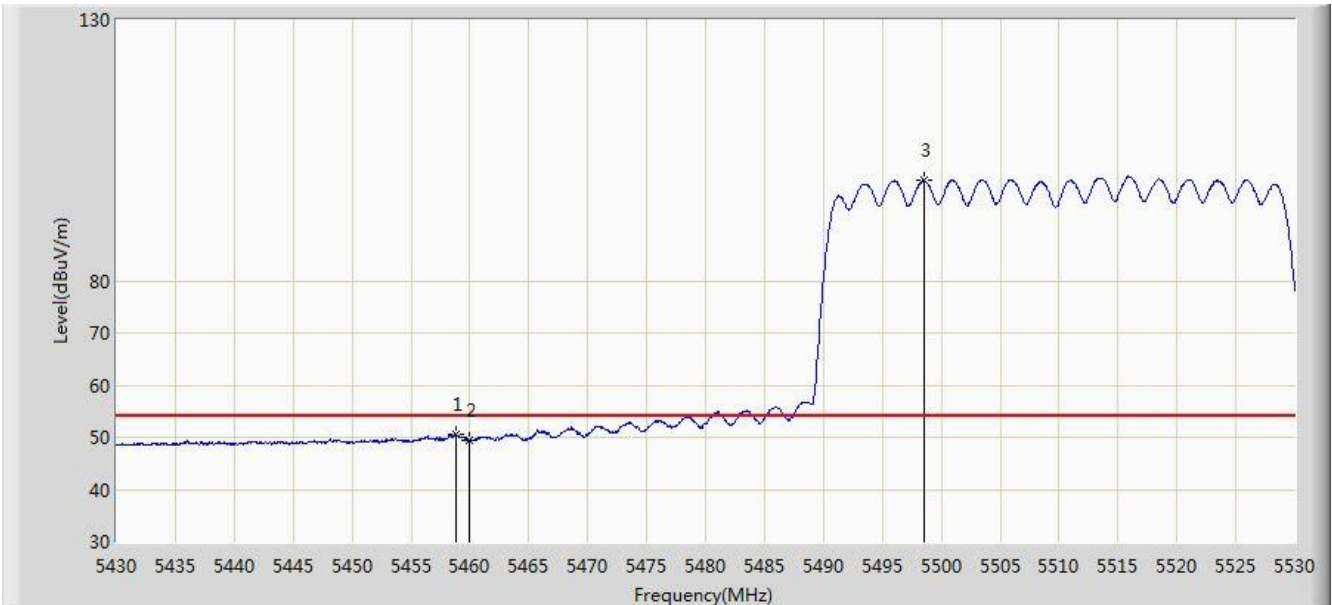


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5458.850        | 50.475                 | 46.340               | -3.525      | 54.000         | 4.135       | AV   |
| 2  |      |      | 5460.000        | 49.499                 | 45.363               | -4.501      | 54.000         | 4.136       | AV   |
| 3  |      | *    | 5498.550        | 99.132                 | 94.954               | N/A         | N/A            | 4.179       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:40 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz Ant 0 + 1 |                          |

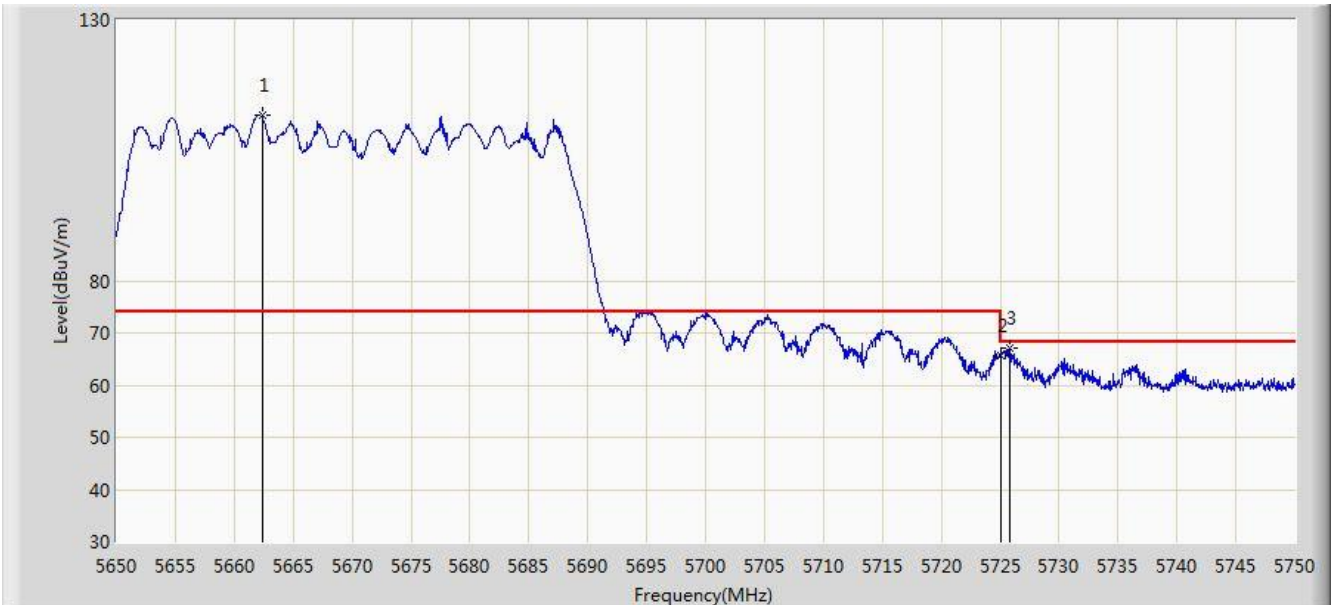


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5662.350        | 111.841                | 107.047              | N/A         | N/A            | 4.794       | PK   |
| 2  |      |      | 5725.000        | 65.523                 | 60.489               | -2.677      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5725.800        | 67.146                 | 62.109               | -1.054      | 68.200         | 5.037       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:39 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz Ant 0 + 1 |                          |

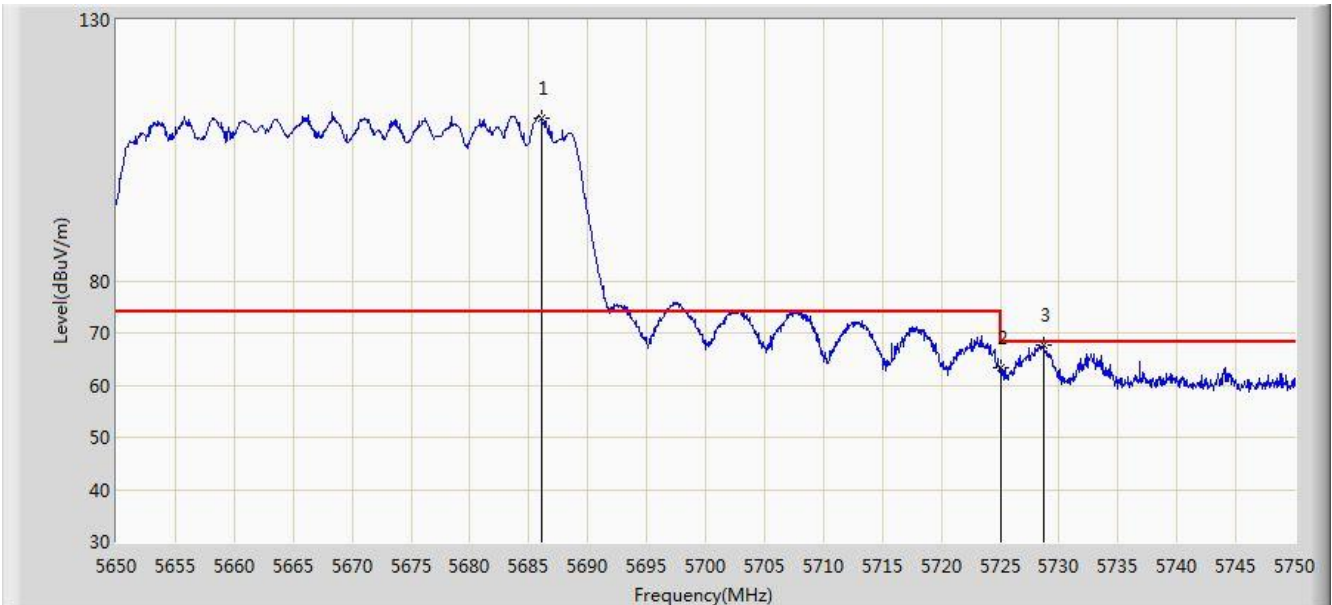


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5686.050        | 111.248                | 106.363              | N/A         | N/A            | 4.884       | PK   |
| 2  |      |      | 5725.000        | 63.336                 | 58.302               | -4.864      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5728.650        | 67.729                 | 62.681               | -0.471      | 68.200         | 5.048       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:01 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

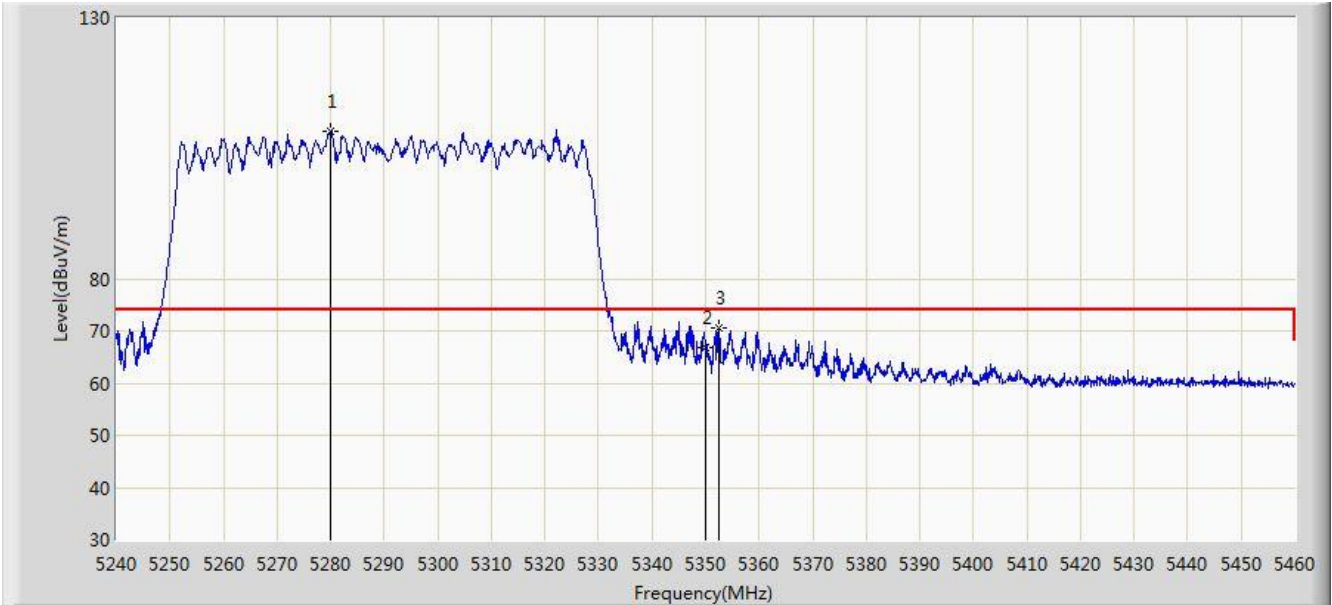


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5279.930        | 108.175                | 104.190              | N/A         | N/A            | 3.985       | PK   |
| 2  |      |      | 5350.000        | 66.877                 | 62.833               | -7.123      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5352.420        | 70.455                 | 66.409               | -3.545      | 74.000         | 4.046       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:04 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

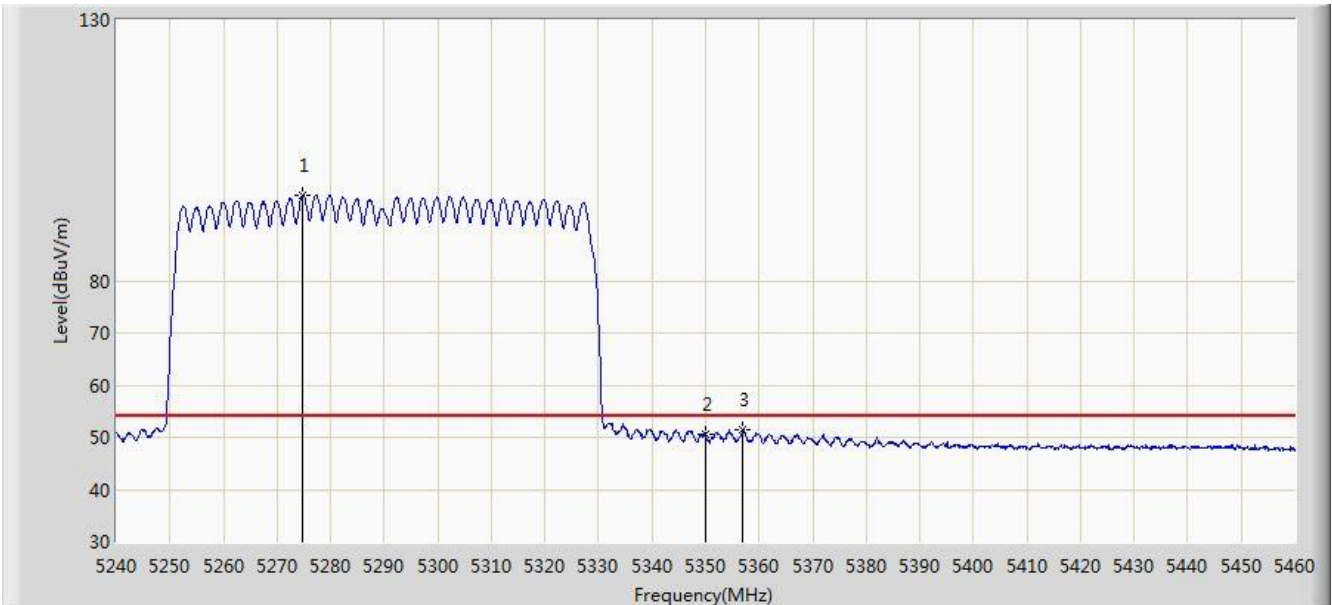


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5274.760        | 96.396                 | 92.415               | N/A         | N/A            | 3.981       | AV   |
| 2  |      |      | 5350.000        | 50.623                 | 46.579               | -3.377      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5356.930        | 51.468                 | 47.418               | -2.532      | 54.000         | 4.050       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:00 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

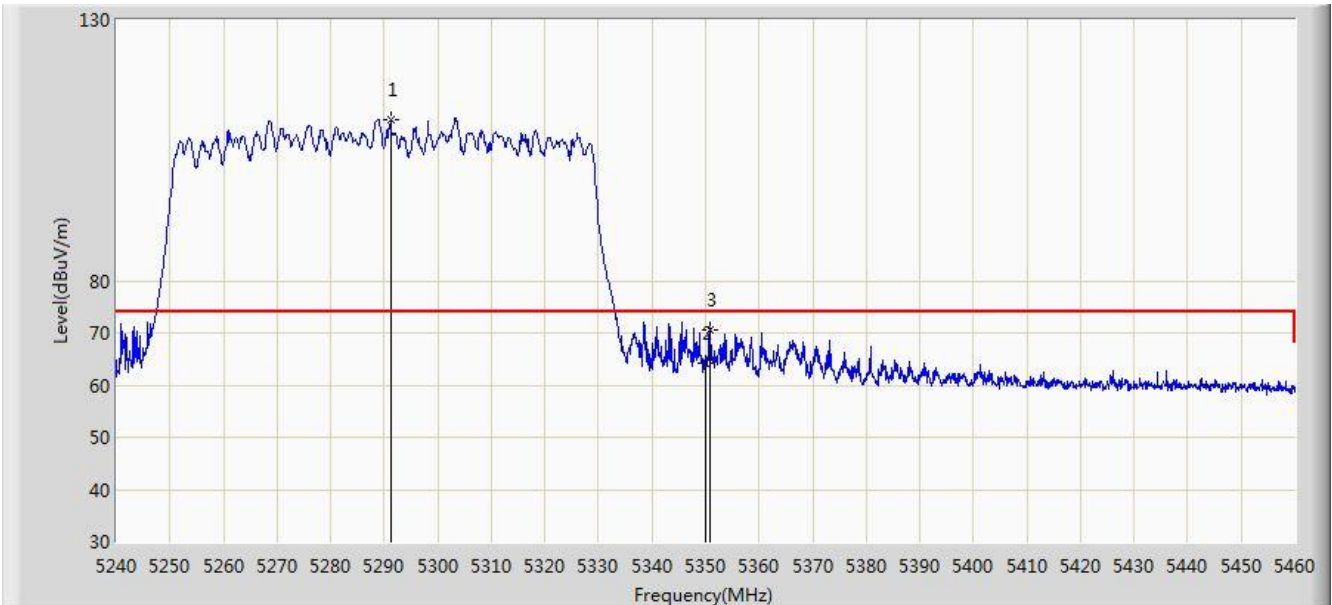


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5291.150        | 110.922                | 106.928              | N/A         | N/A            | 3.994       | PK   |
| 2  |      |      | 5350.000        | 64.333                 | 60.289               | -9.667      | 74.000         | 4.044       | PK   |
| 3  |      |      | 5350.770        | 70.531                 | 66.486               | -3.469      | 74.000         | 4.045       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 22:59 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1 |                          |

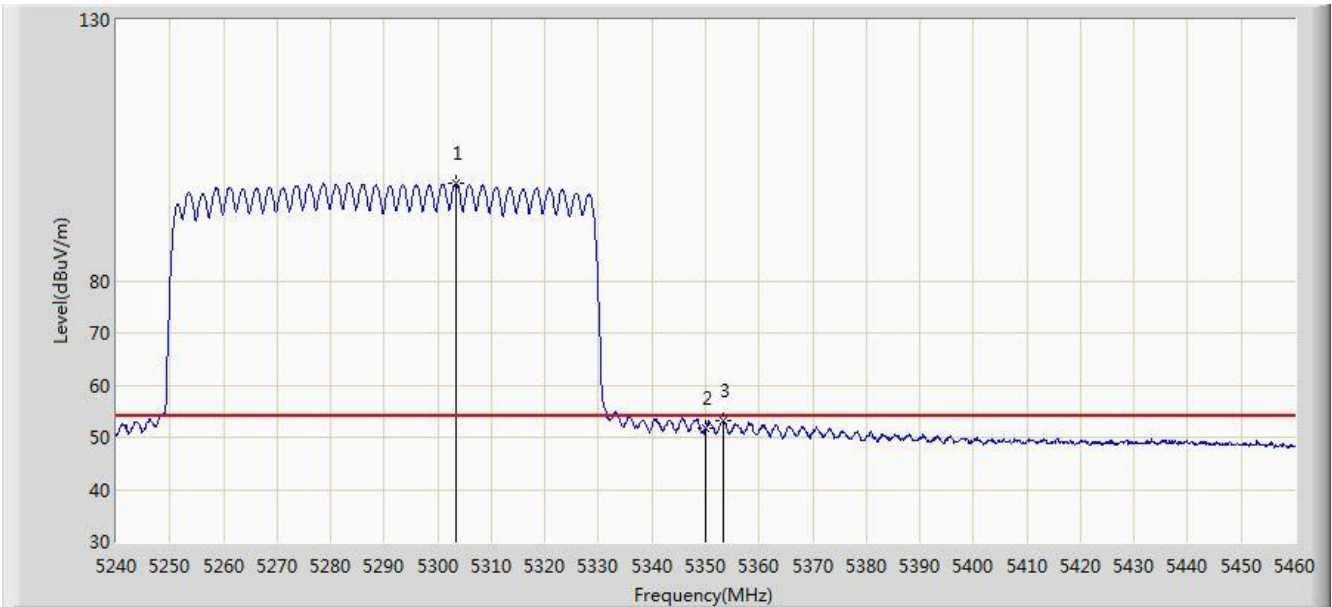


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5303.470        | 98.658                 | 94.653               | N/A         | N/A            | 4.005       | AV   |
| 2  |      |      | 5350.000        | 51.639                 | 47.595               | -2.361      | 54.000         | 4.044       | AV   |
| 3  |      |      | 5353.300        | 53.102                 | 49.055               | -0.898      | 54.000         | 4.047       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:11 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

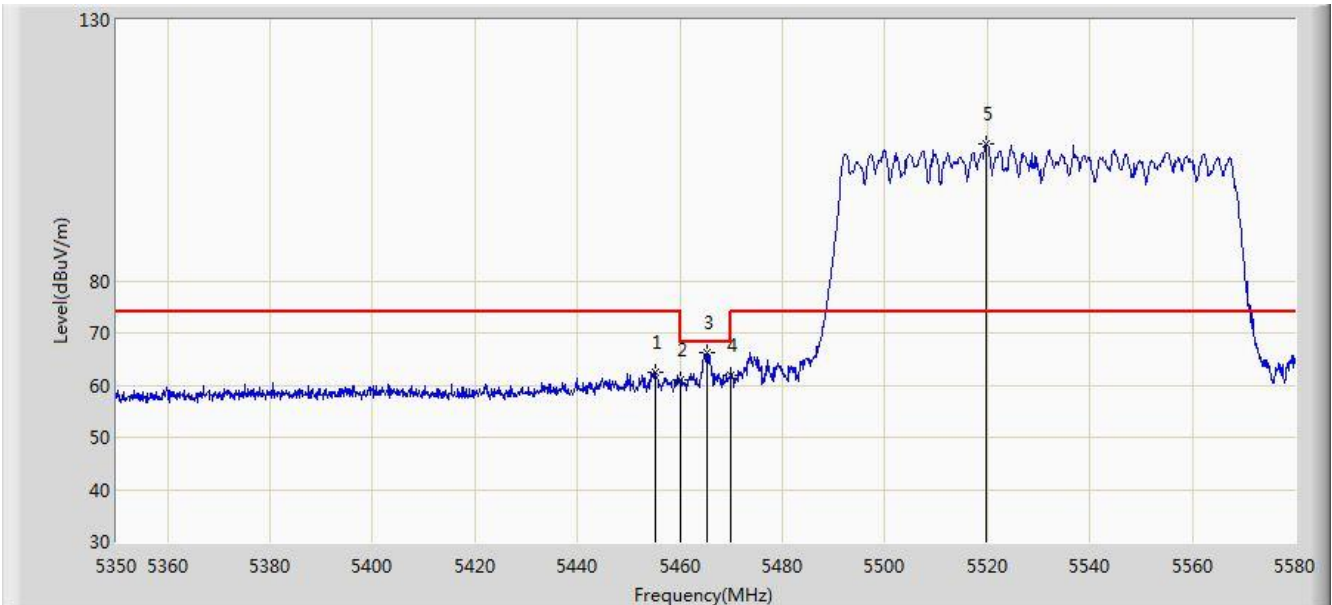


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5455.110        | 62.577                 | 58.445               | -11.423     | 74.000         | 4.132       | PK   |
| 2  |      |      | 5460.000        | 61.104                 | 56.968               | -12.896     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5465.230        | 66.167                 | 62.027               | -2.033      | 68.200         | 4.140       | PK   |
| 4  |      |      | 5470.000        | 61.869                 | 57.725               | -6.331      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5519.740        | 106.137                | 101.891              | N/A         | N/A            | 4.246       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:10 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

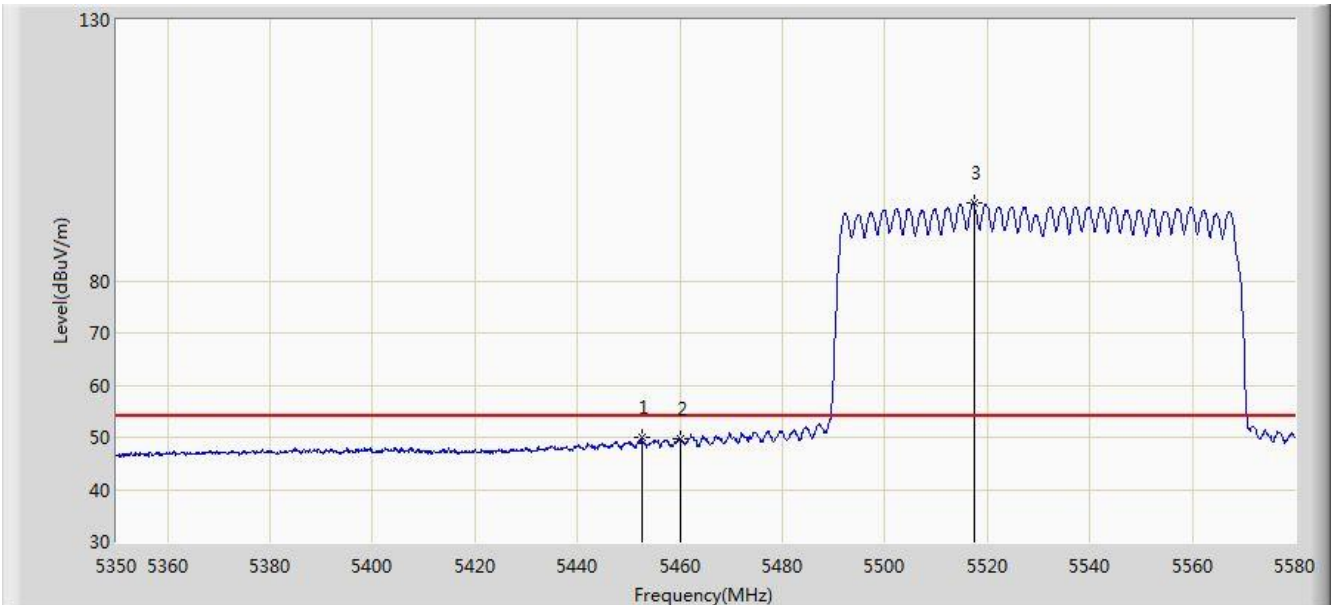


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5452.465        | 49.991                 | 45.861               | -4.009      | 54.000         | 4.130       | AV   |
| 2  |      |      | 5460.000        | 49.662                 | 45.526               | -4.338      | 54.000         | 4.136       | AV   |
| 3  |      | *    | 5517.325        | 94.806                 | 90.569               | N/A         | N/A            | 4.236       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:09 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

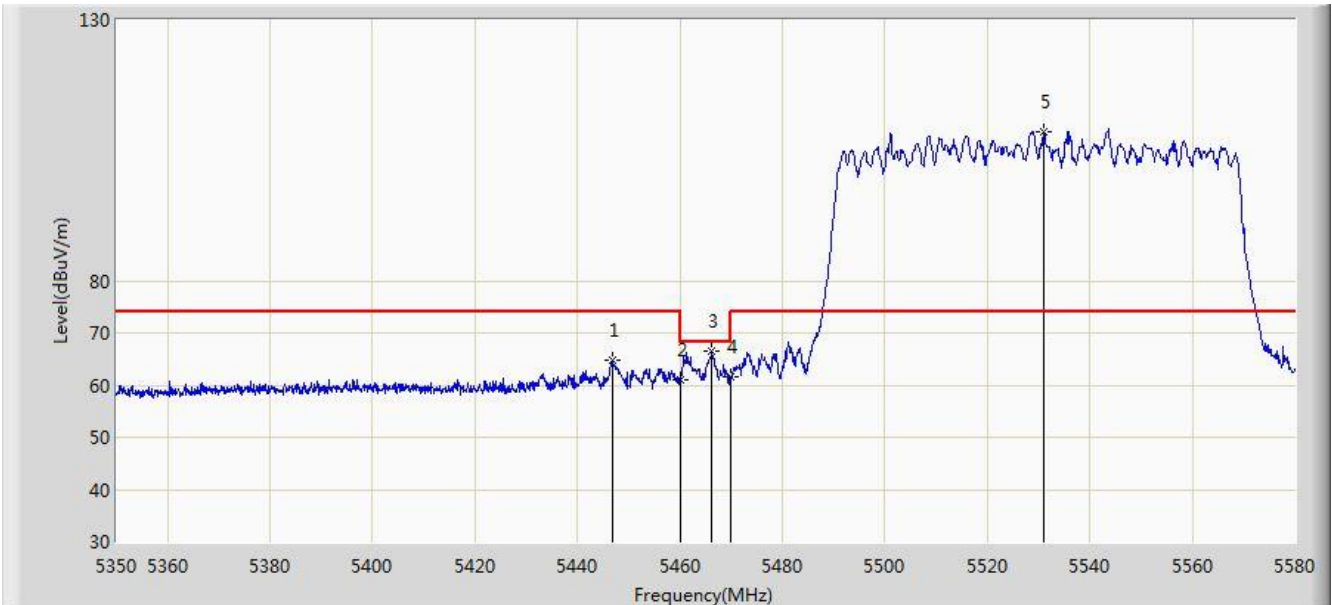


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5446.945        | 64.883                 | 60.758               | -9.117      | 74.000         | 4.125       | PK   |
| 2  |      |      | 5460.000        | 60.896                 | 56.760               | -13.104     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5466.265        | 66.608                 | 62.467               | -1.592      | 68.200         | 4.141       | PK   |
| 4  |      |      | 5470.000        | 61.704                 | 57.560               | -6.496      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5530.895        | 108.579                | 104.290              | N/A         | N/A            | 4.289       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:10 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1 |                          |

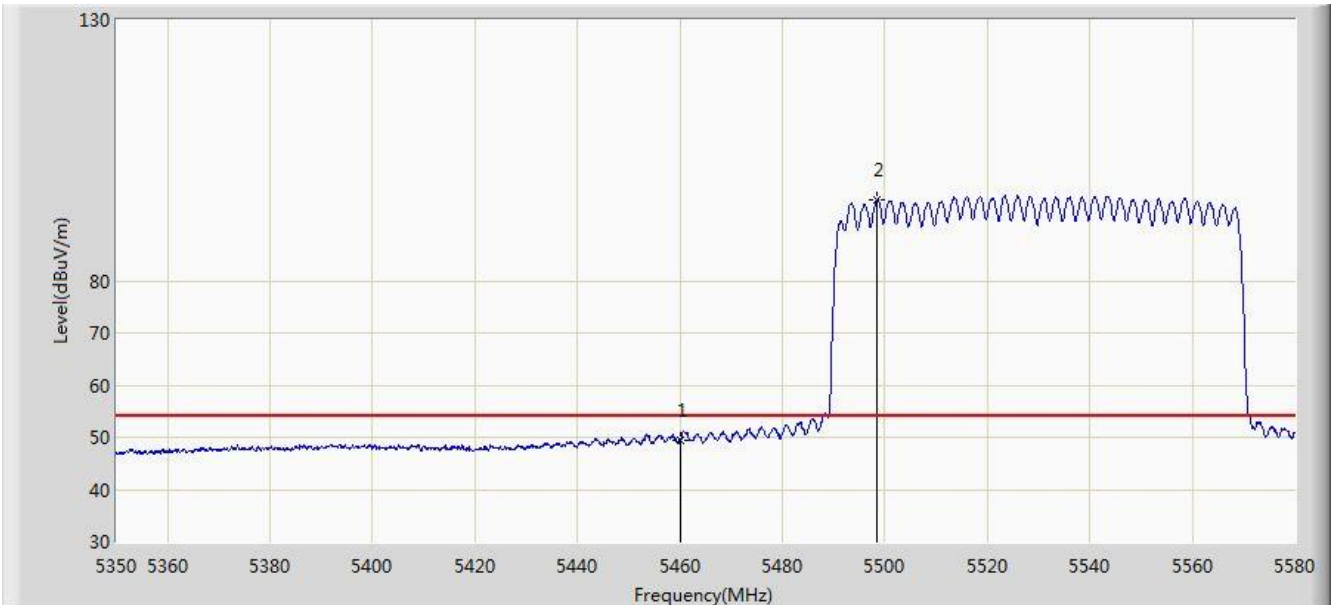


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 49.325                 | 45.189               | -4.675      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5498.465        | 95.441                 | 91.263               | N/A         | N/A            | 4.179       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:15 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz Ant 0 + 1 |                          |

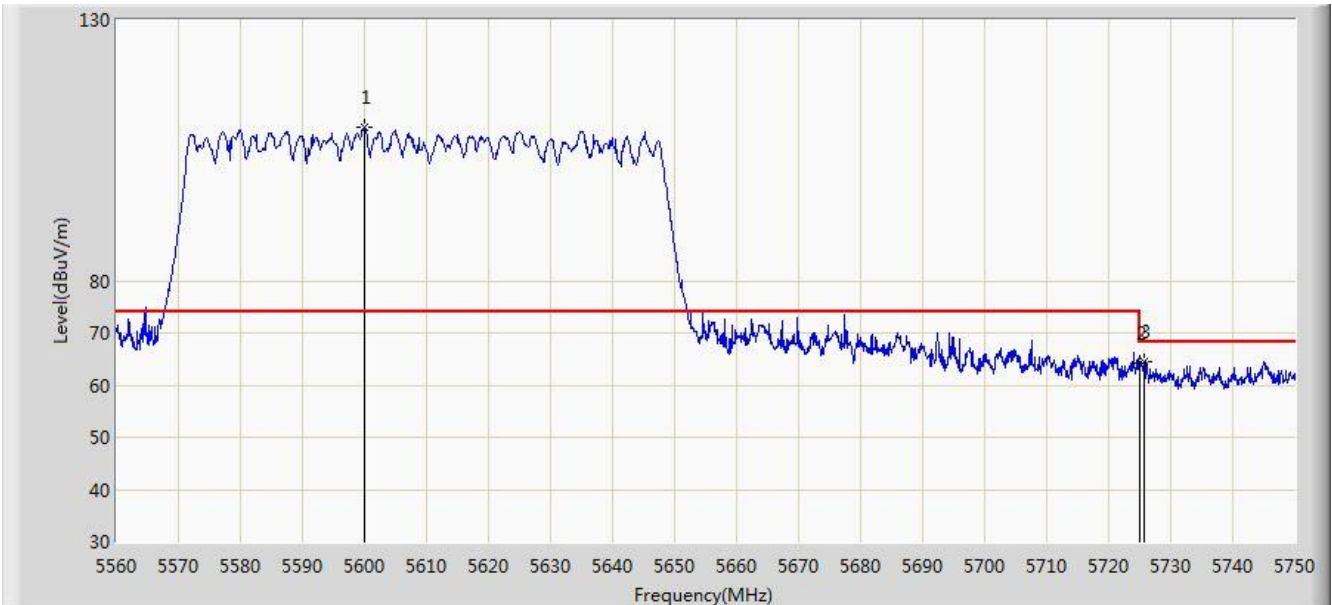


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5599.900        | 109.370                | 104.817              | 35.370      | 74.000         | 4.554       | PK   |
| 2  |      |      | 5725.000        | 64.280                 | 59.246               | -3.920      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5725.775        | 64.621                 | 59.584               | -3.579      | 68.200         | 5.037       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/07/11 - 23:14 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz Ant 0 + 1 |                          |

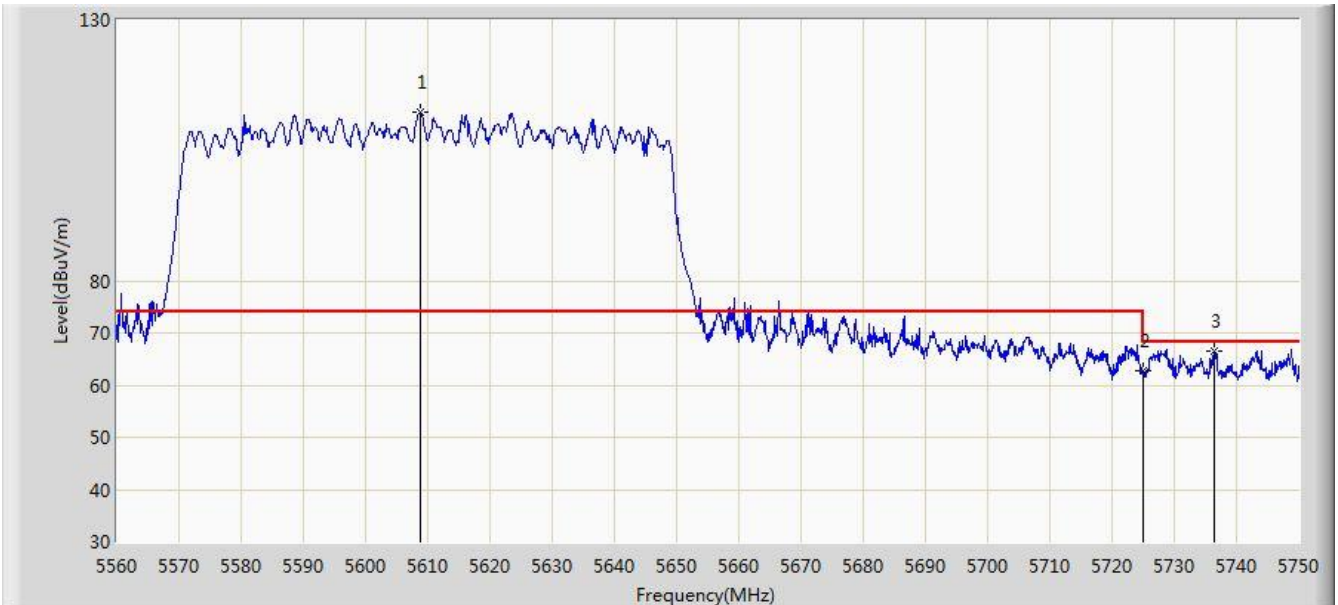

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5608.925        | 112.174                | 107.586              | 38.174      | 74.000         | 4.587       | PK   |
| 2  |      |      | 5725.000        | 62.697                 | 57.663               | -5.503      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5736.510        | 66.624                 | 61.546               | -1.576      | 68.200         | 5.078       | PK   |


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



**For APIN0505**

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:20 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |

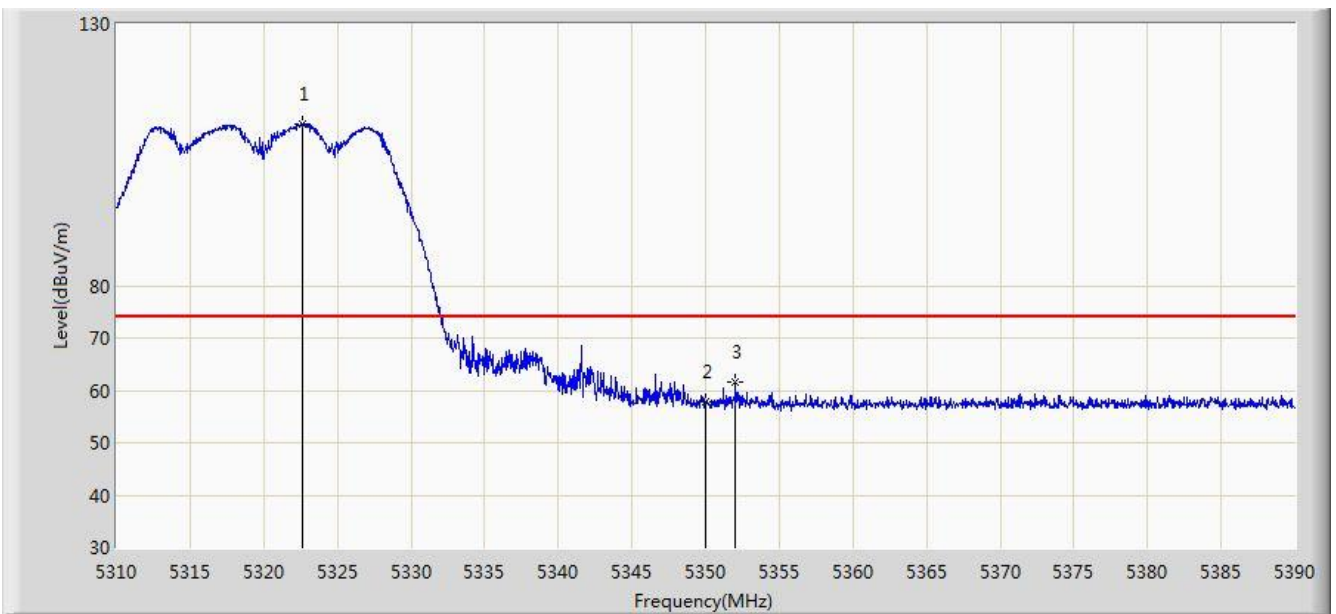


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.600        | 110.907                | 106.886              | N/A         | N/A            | 4.021       | PK   |
| 2  |      |      | 5350.000        | 57.916                 | 53.872               | -16.084     | 74.000         | 4.044       | PK   |
| 3  |      |      | 5352.000        | 61.549                 | 57.503               | -12.451     | 74.000         | 4.046       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:21 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |

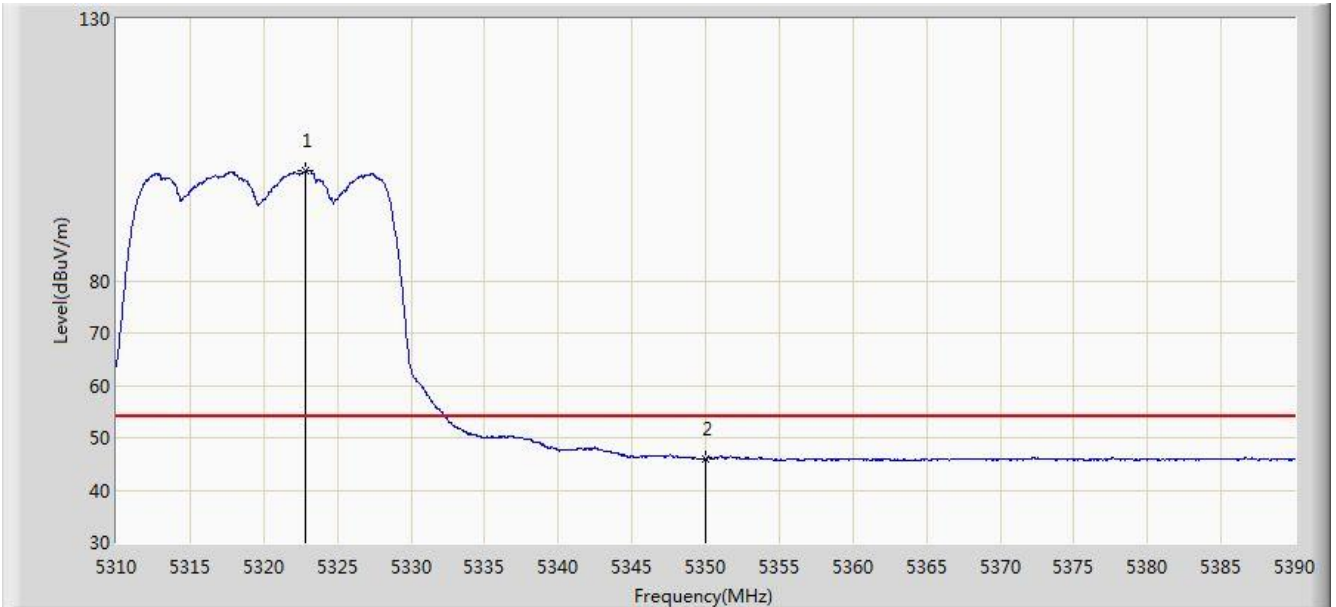


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.840        | 101.021                | 97.000               | N/A         | N/A            | 4.021       | AV   |
| 2  |      |      | 5350.000        | 46.074                 | 42.030               | -7.926      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:18 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |

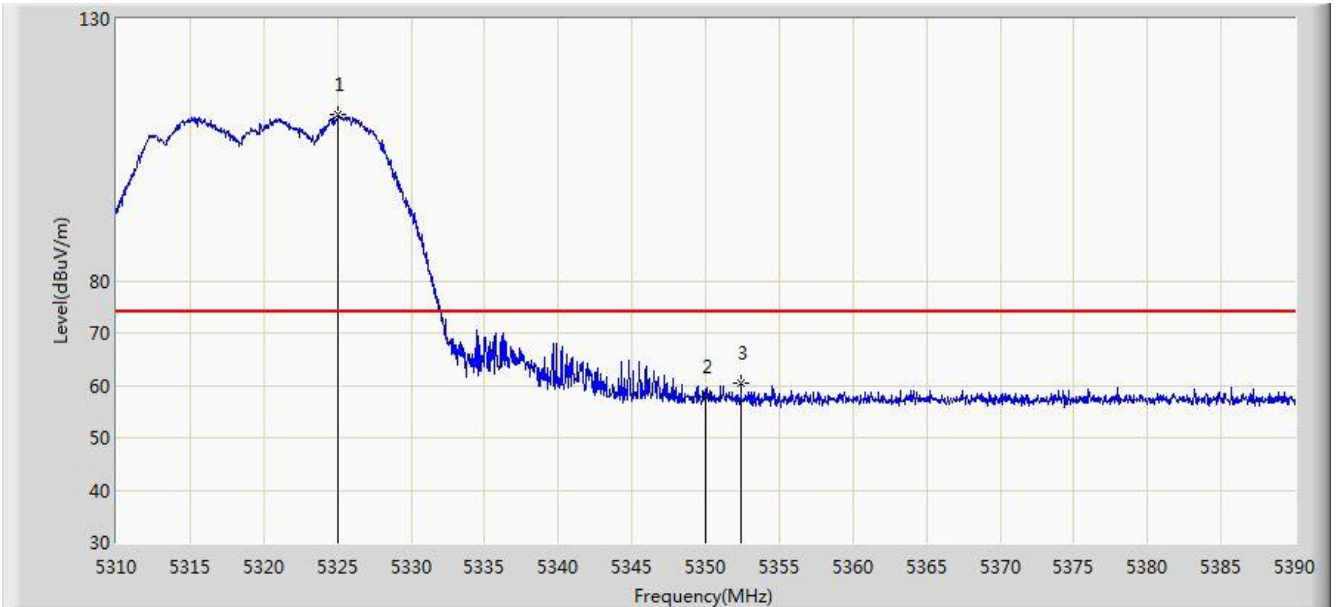


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5325.040        | 111.756                | 107.733              | N/A         | N/A            | 4.023       | PK   |
| 2  |      |      | 5350.000        | 57.781                 | 53.737               | -16.219     | 74.000         | 4.044       | PK   |
| 3  |      |      | 5352.400        | 60.406                 | 56.360               | -13.594     | 74.000         | 4.046       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:20 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1 |                          |

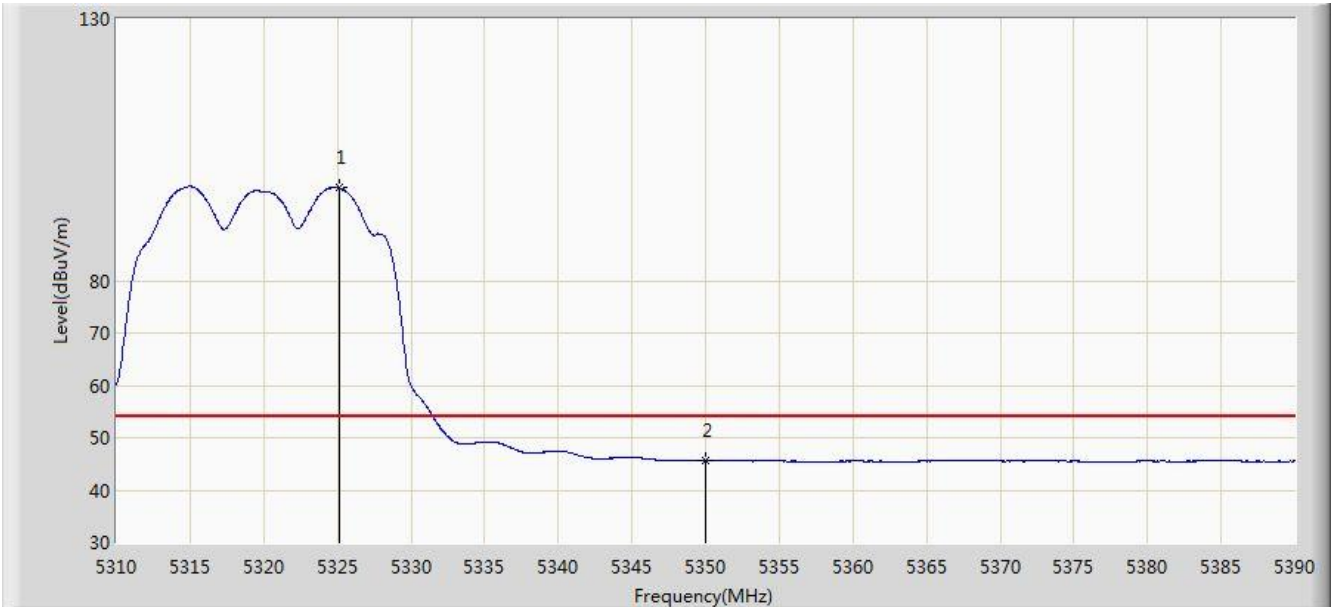


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5325.120        | 97.683                 | 93.660               | N/A         | N/A            | 4.023       | AV   |
| 2  |      |      | 5350.000        | 45.698                 | 41.654               | -8.302      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:25 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

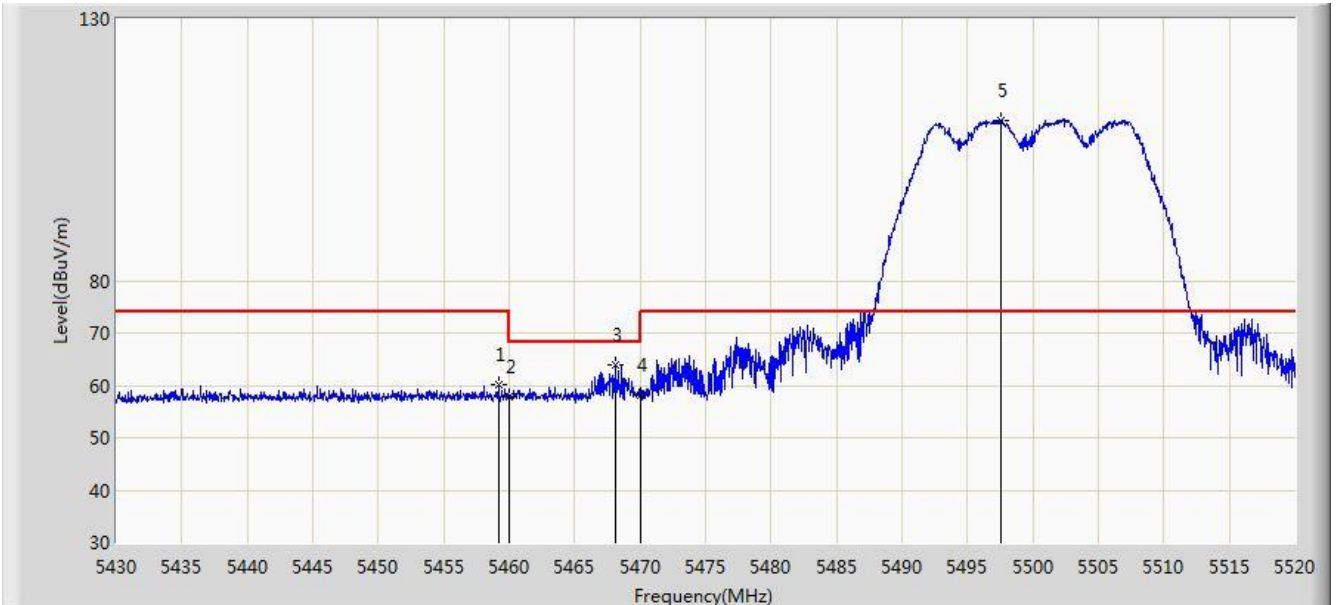


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5459.160        | 60.002                 | 55.867               | -13.998     | 74.000         | 4.135       | PK   |
| 2  |      |      | 5460.000        | 57.842                 | 53.706               | -16.158     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5468.115        | 63.869                 | 59.726               | -4.331      | 68.200         | 4.143       | PK   |
| 4  |      |      | 5470.000        | 58.164                 | 54.020               | -10.036     | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5497.590        | 110.659                | 106.482              | N/A         | N/A            | 4.177       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:26 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

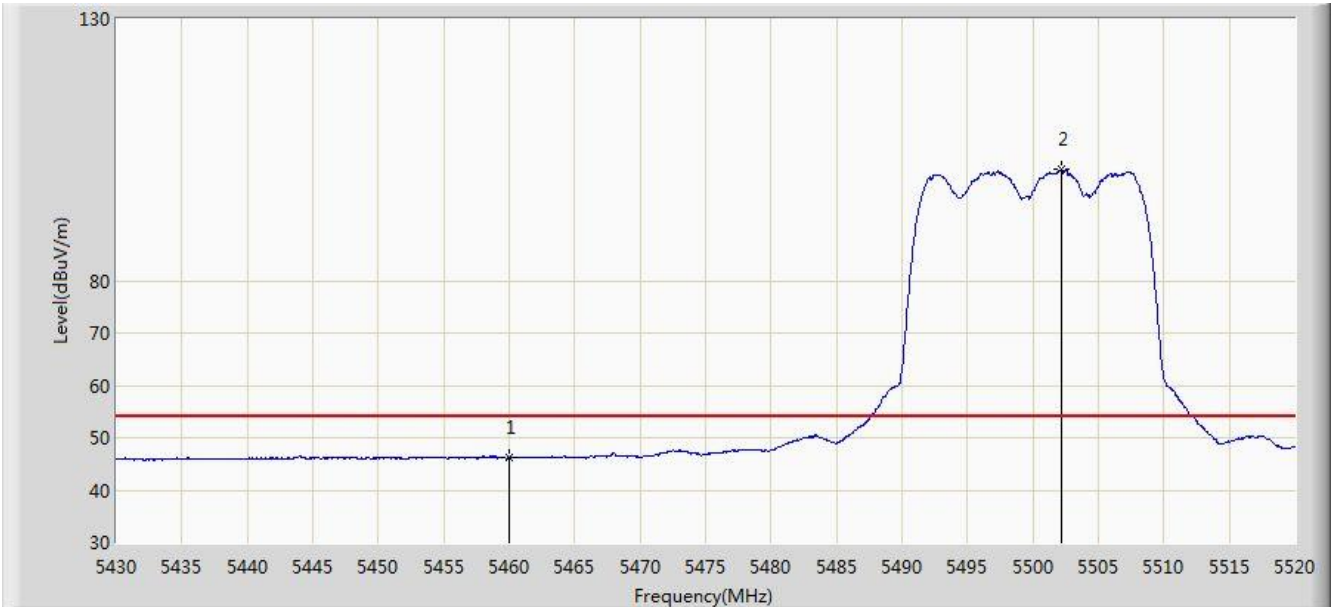


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.234                 | 42.098               | -7.766      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5502.180        | 101.291                | 97.106               | N/A         | N/A            | 4.185       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:24 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

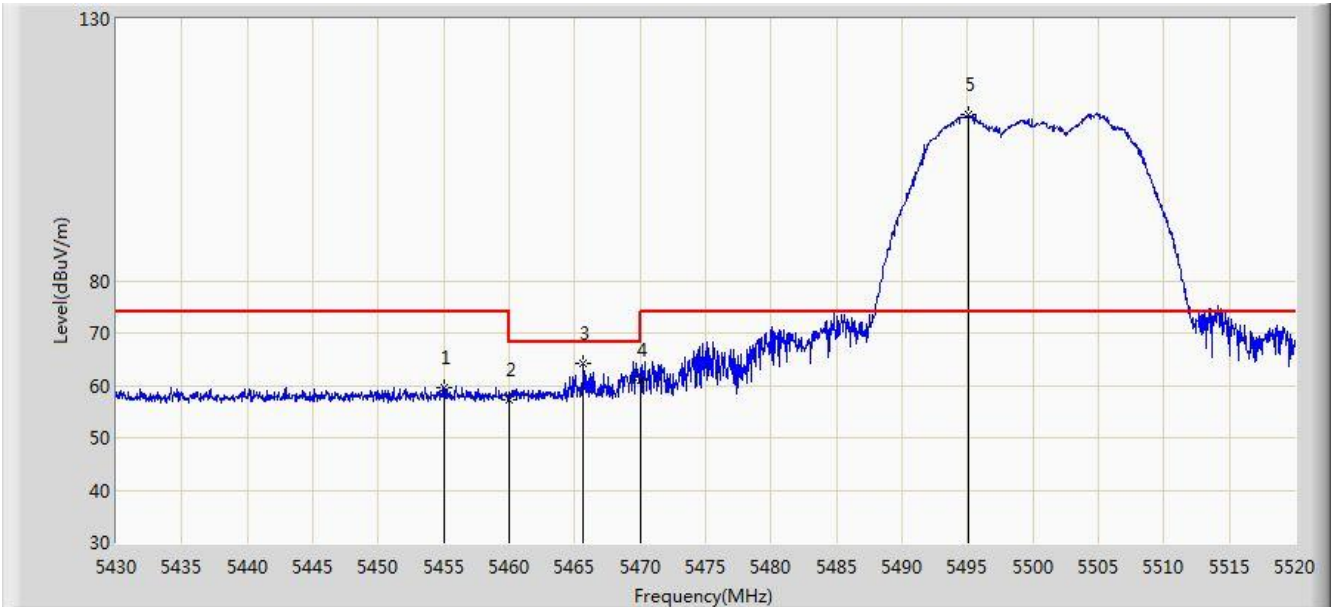


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5455.020        | 59.695                 | 55.563               | -14.305     | 74.000         | 4.132       | PK   |
| 2  |      |      | 5460.000        | 57.391                 | 53.255               | -16.609     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5465.685        | 64.328                 | 60.187               | -3.872      | 68.200         | 4.141       | PK   |
| 4  |      |      | 5470.000        | 60.957                 | 56.813               | -7.243      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5495.025        | 111.625                | 107.453              | N/A         | N/A            | 4.172       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:25 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1 |                          |

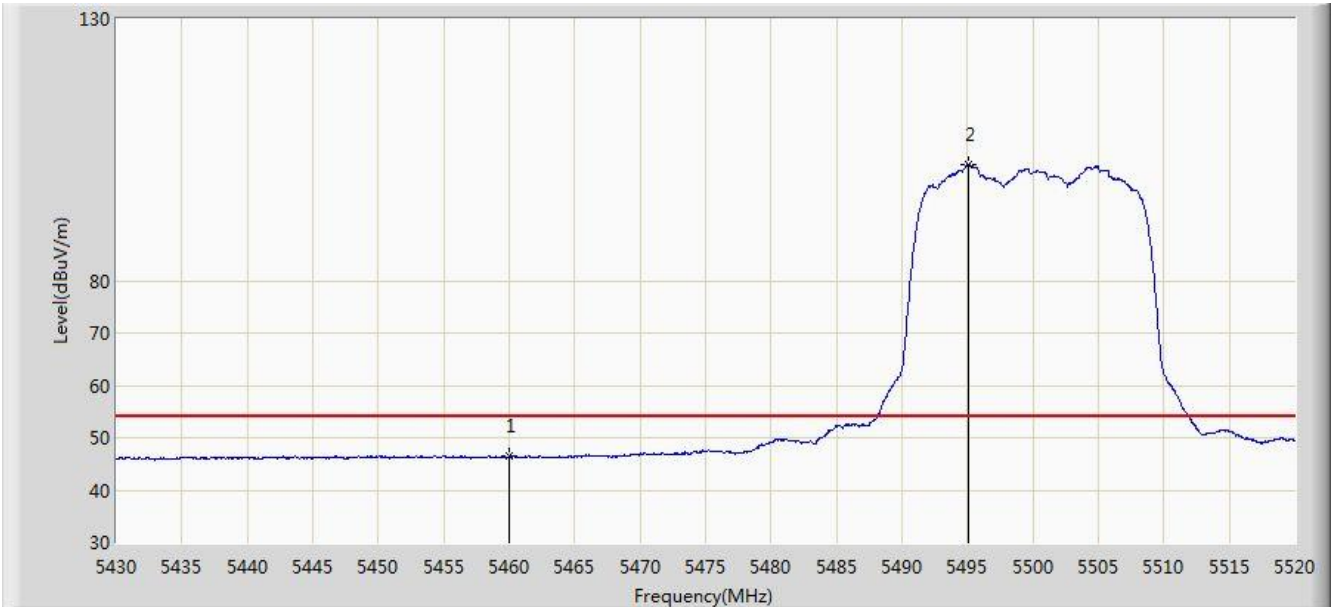


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.392                 | 42.256               | -7.608      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5495.025        | 102.219                | 98.047               | N/A         | N/A            | 4.172       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:29 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Horizontal     |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5700MHz Ant 0 + 1 |                          |

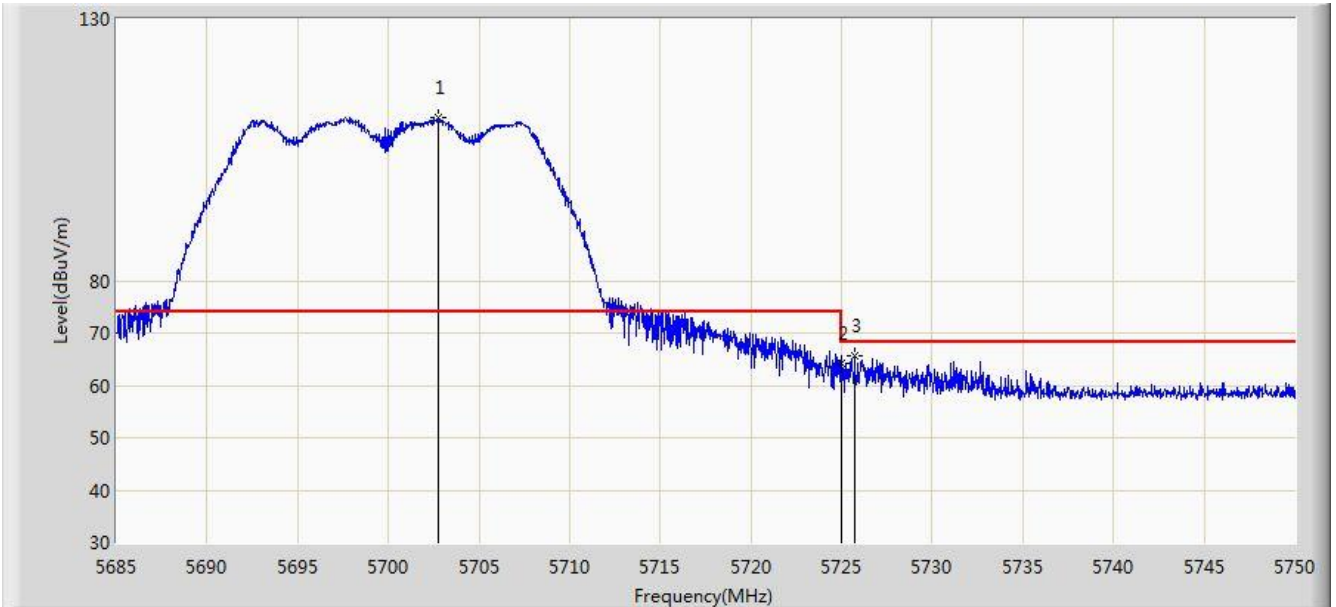


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5702.745        | 111.033                | 106.084              | N/A         | N/A            | 4.948       | PK   |
| 2  |      |      | 5725.000        | 64.063                 | 59.029               | -4.137      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5725.723        | 65.601                 | 60.564               | -2.599      | 68.200         | 5.036       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|   |                          |
|---|--------------------------|
| Site: AC1   | Time: 2019/06/26 - 23:27 |
| Limit: FCC_Part15.209_RE(3m)                                | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz                                   | Polarity: Vertical       |
| EUT: ACCESS POINT   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5700MHz Ant 0 + 1 |                          |

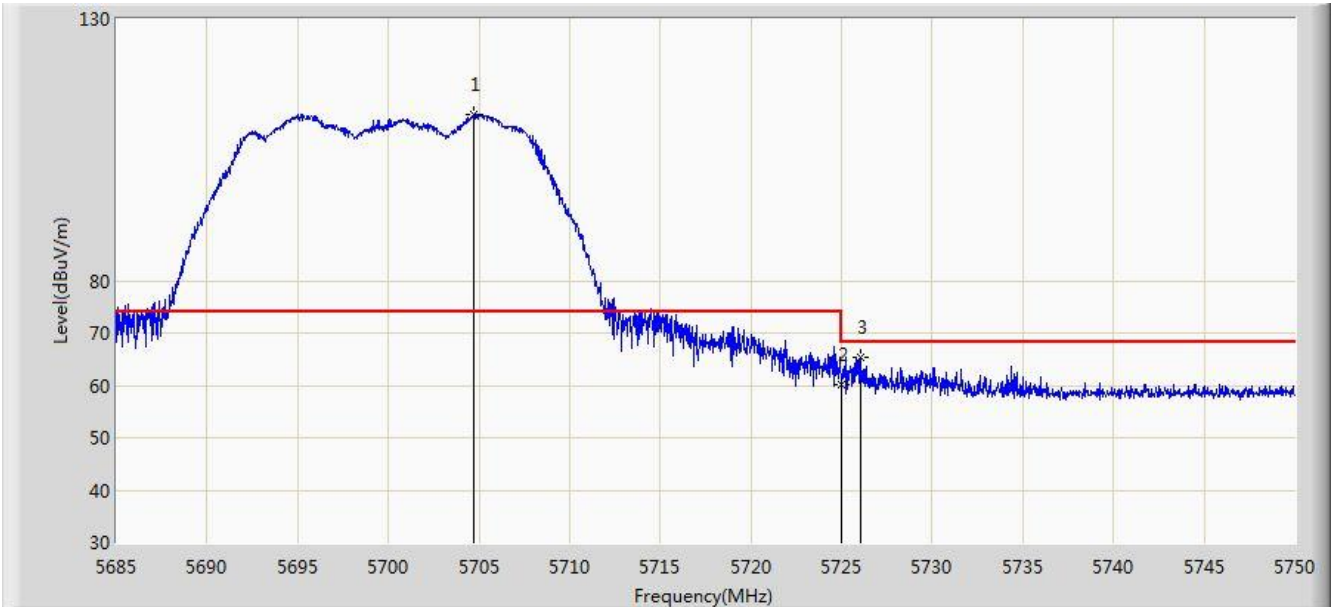


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5704.695        | 111.854                | 106.898              | N/A         | N/A            | 4.956       | PK   |
| 2  |      |      | 5725.000        | 60.184                 | 55.150               | -8.016      | 68.200         | 5.034       | PK   |
| 3  |      |      | 5726.047        | 65.228                 | 60.190               | -2.972      | 68.200         | 5.038       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/26 - 23:53 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

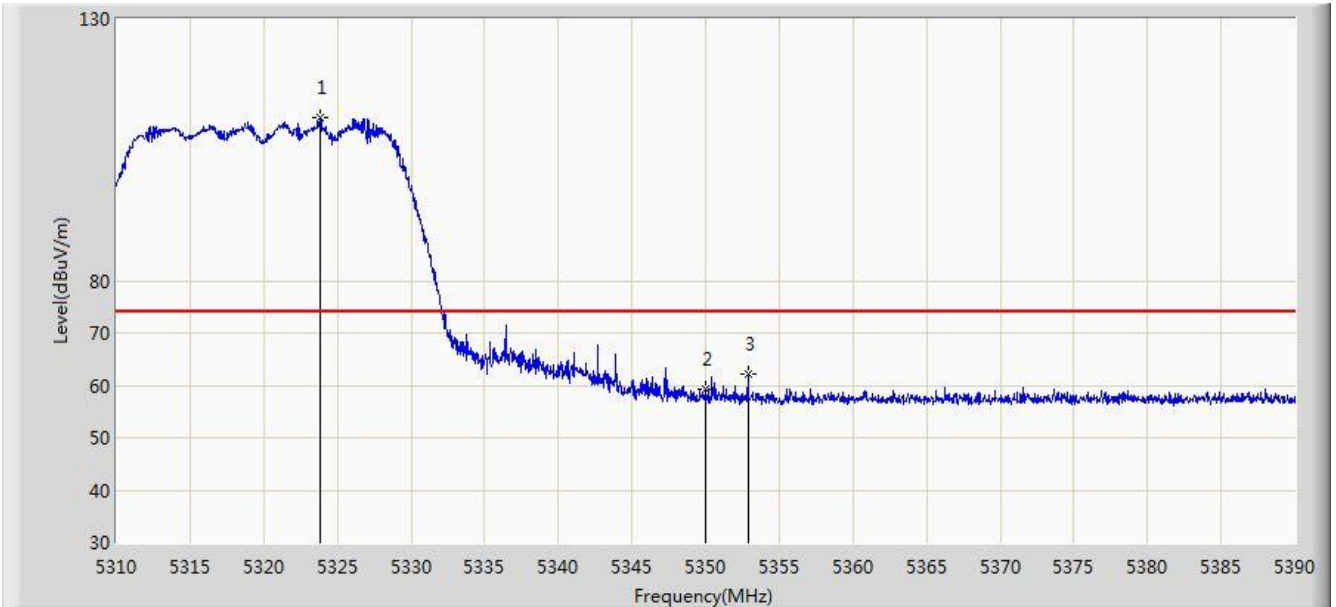


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5323.880        | 111.016                | 106.994              | N/A         | N/A            | 4.022       | PK   |
| 2  |      |      | 5350.000        | 59.356                 | 55.312               | -14.644     | 74.000         | 4.044       | PK   |
| 3  |      |      | 5352.880        | 62.141                 | 58.094               | -11.859     | 74.000         | 4.047       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/26 - 23:55 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

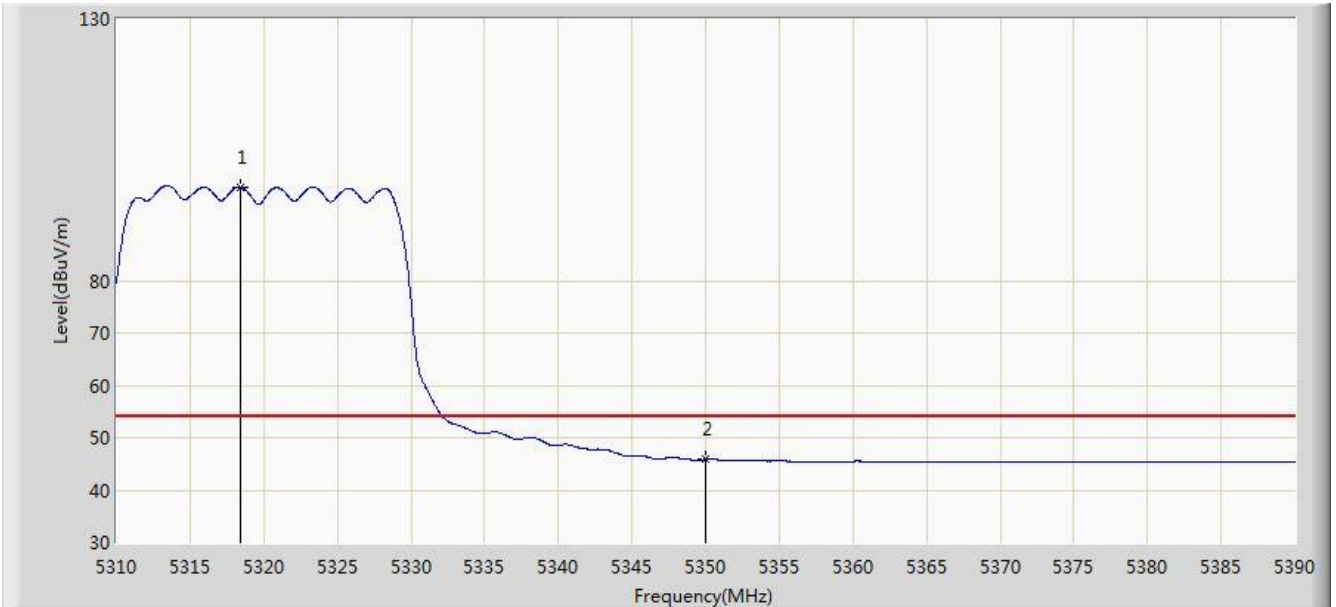


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5318.400        | 97.902                 | 93.885               | N/A         | N/A            | 4.017       | AV   |
| 2  |      |      | 5350.000        | 45.833                 | 41.789               | -8.167      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/26 - 23:51 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

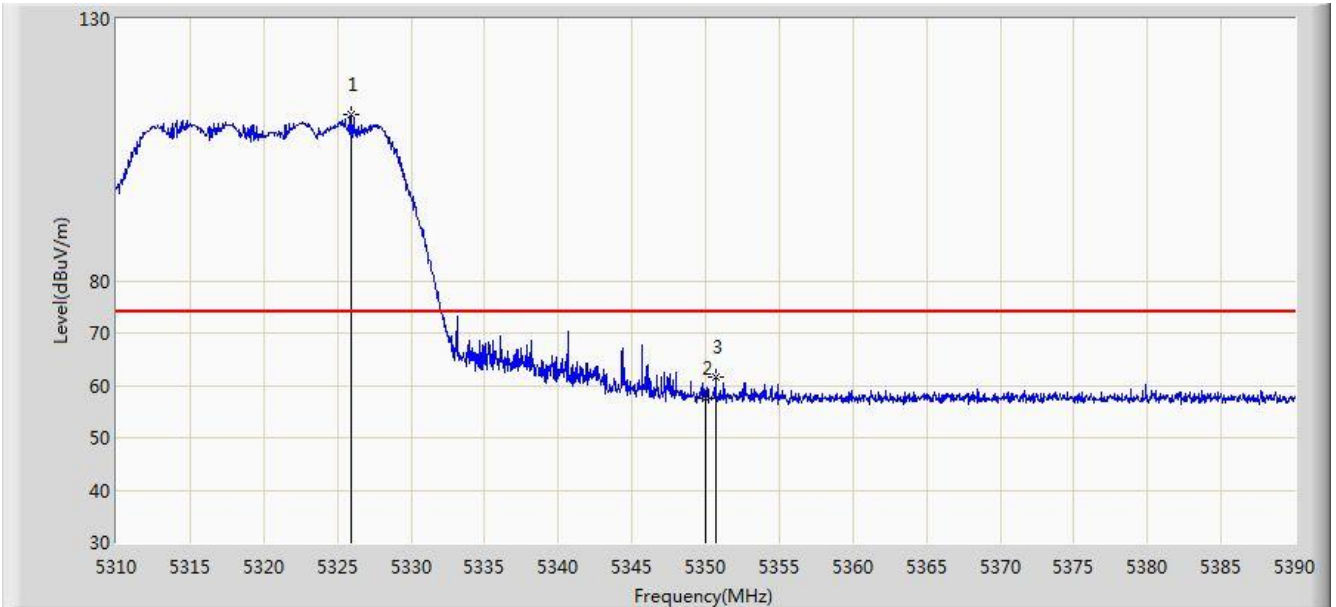


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5325.920        | 111.687                | 107.663              | N/A         | N/A            | 4.024       | PK   |
| 2  |      |      | 5350.000        | 57.633                 | 53.589               | -16.367     | 74.000         | 4.044       | PK   |
| 3  |      |      | 5350.680        | 61.583                 | 57.538               | -12.417     | 74.000         | 4.045       | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/26 - 23:53 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Vertical       |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1 |                          |

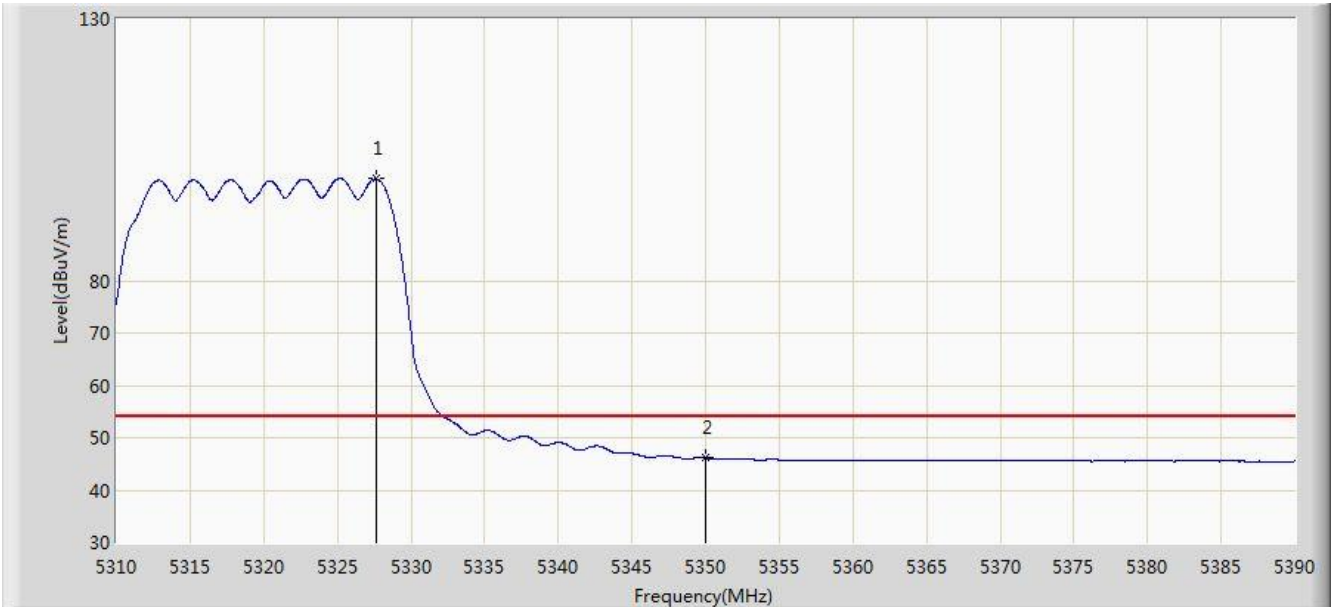


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5327.640        | 99.458                 | 95.432               | N/A         | N/A            | 4.026       | AV   |
| 2  |      |      | 5350.000        | 46.175                 | 42.131               | -7.825      | 54.000         | 4.044       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/26 - 23:57 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1 |                          |

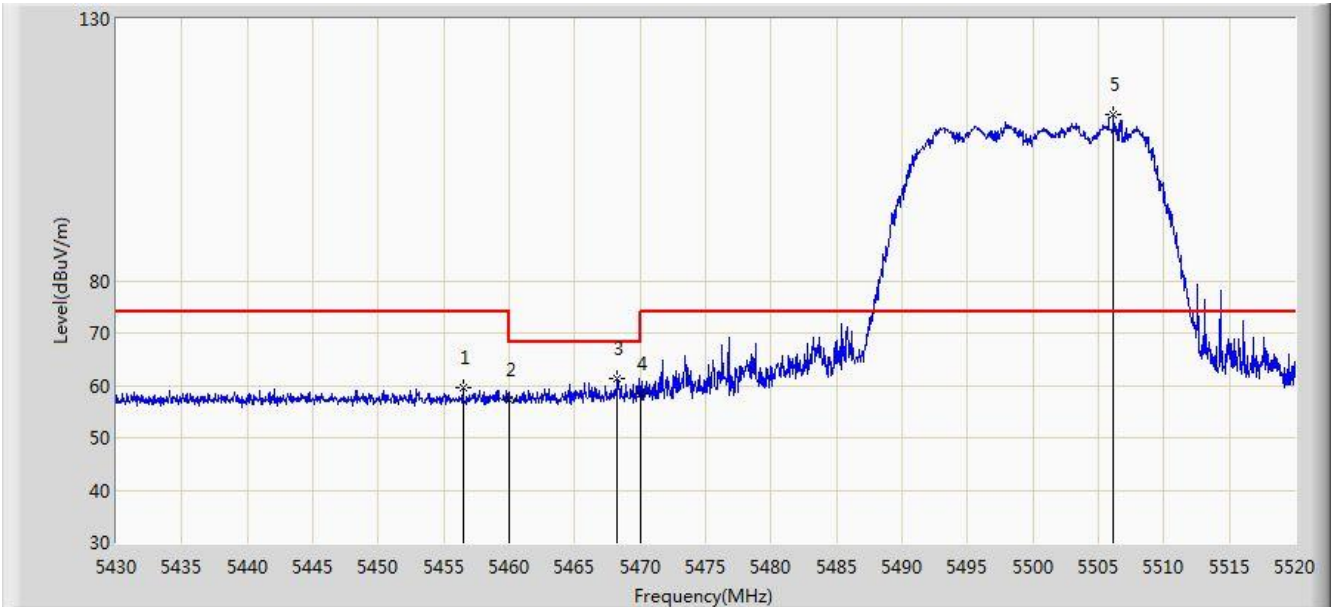


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.460        | 59.621                 | 55.488               | -14.379     | 74.000         | 4.133       | PK   |
| 2  |      |      | 5460.000        | 57.366                 | 53.230               | -16.634     | 74.000         | 4.136       | PK   |
| 3  |      |      | 5468.250        | 61.344                 | 57.201               | -6.856      | 68.200         | 4.143       | PK   |
| 4  |      |      | 5470.000        | 58.470                 | 54.326               | -9.730      | 68.200         | 4.144       | PK   |
| 5  |      | *    | 5506.140        | 111.744                | 107.550              | N/A         | N/A            | 4.193       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|  |                          |
|--|--------------------------|
| Site: AC1  | Time: 2019/06/26 - 23:58 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Kevin Ker      |
| Probe: BBHA 9120D_1-18GHz  | Polarity: Horizontal     |
| EUT: ACCESS POINT  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1 |                          |

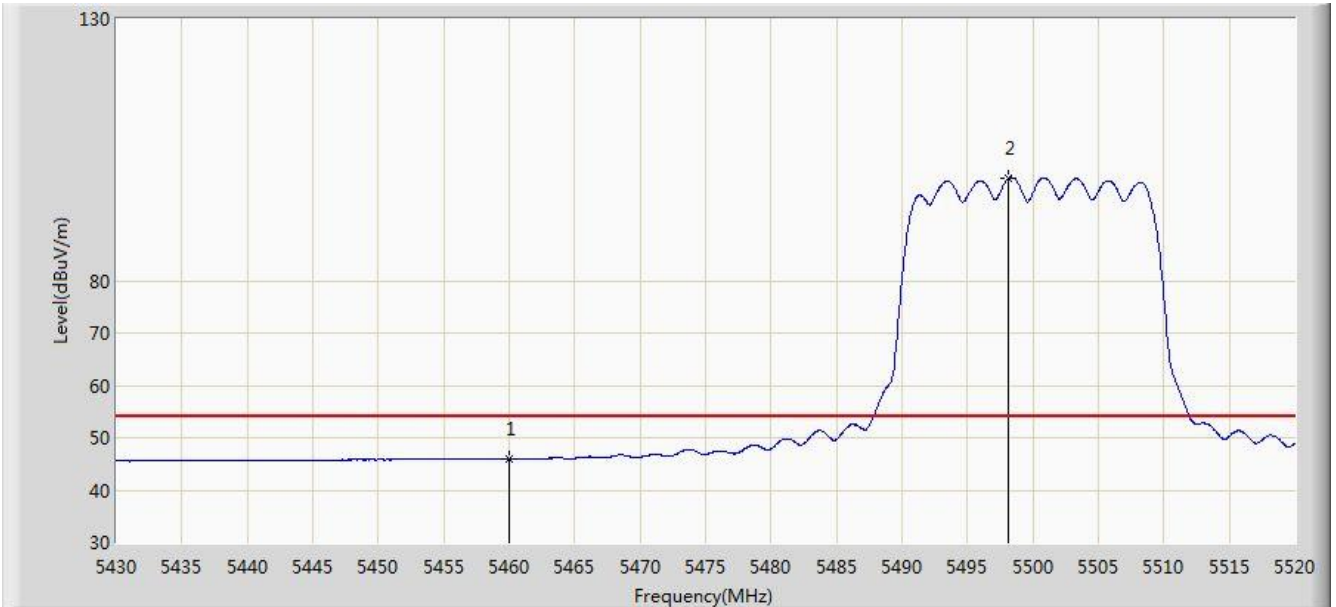

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.006                 | 41.870               | -7.994      | 54.000         | 4.136       | AV   |
| 2  |      | *    | 5498.085        | 99.428                 | 95.250               | N/A         | N/A            | 4.178       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)