



802.11ax-HE40 26dB & 99% Bandwidth


Channel 134 (5670MHz)

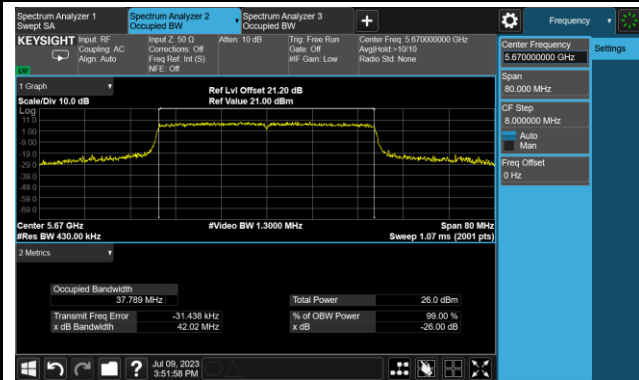


Channel 142(5710MHz)

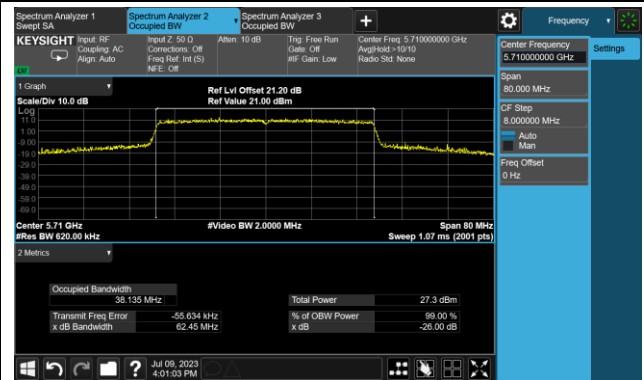

Channel 151 (5755MHz)

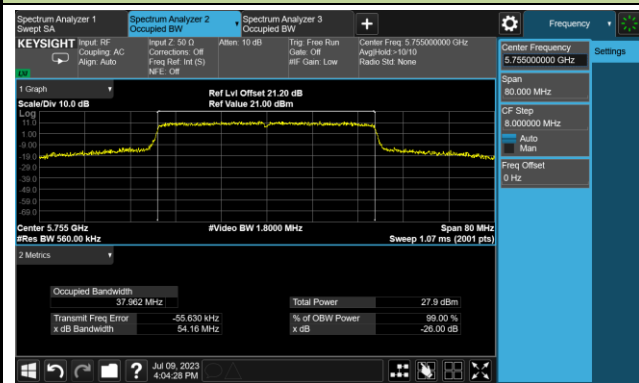


Channel 159 (5795MHz)

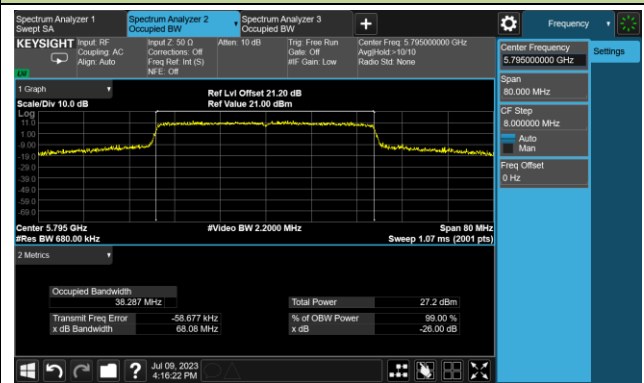


802.11ax-HE80 26dB & 99% Bandwidth


Channel 42 (5210MHz)

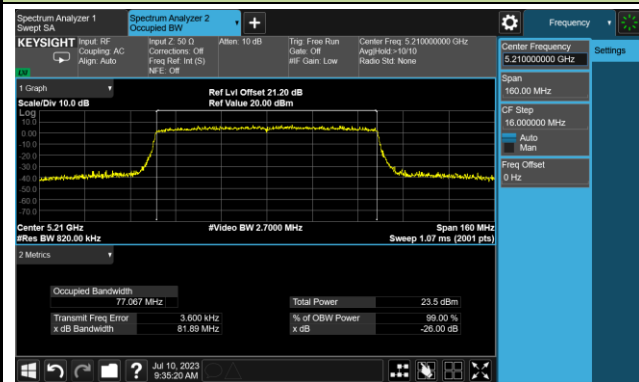


Channel 58 (5290MHz)

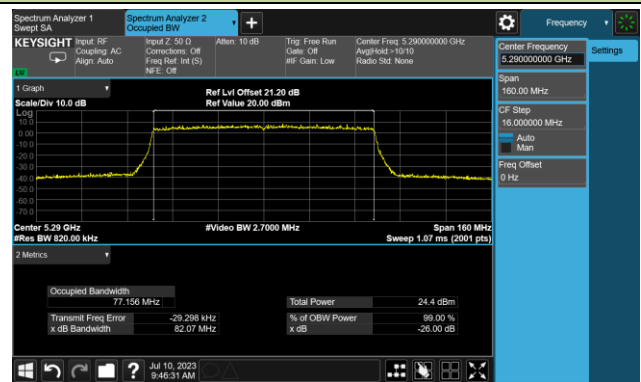


Channel 106 (5530MHz)

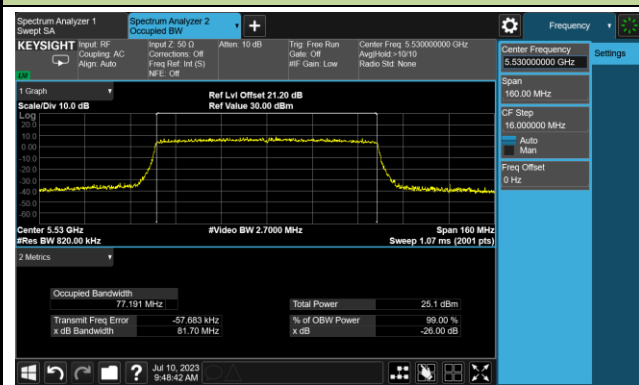


Channel 122 (5610MHz)

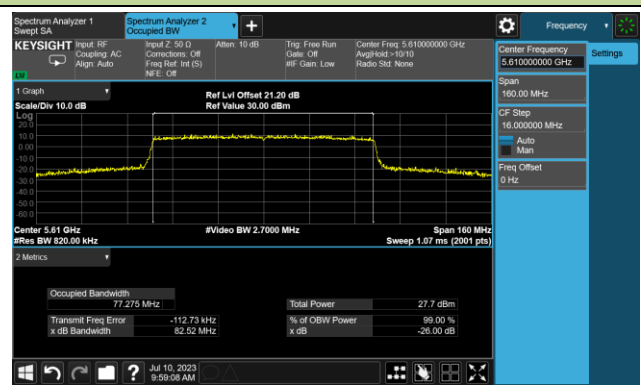

Channel 138 (5690MHz)

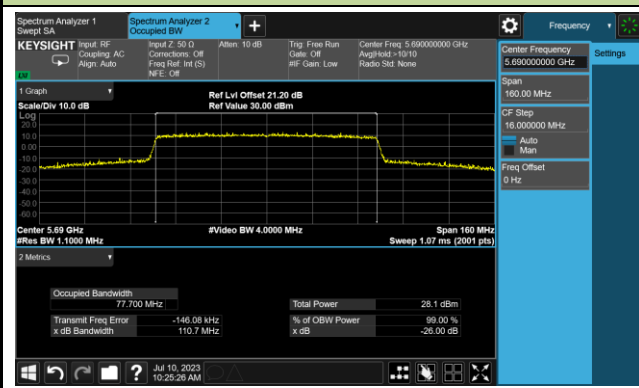

Channel 155 (5775MHz)

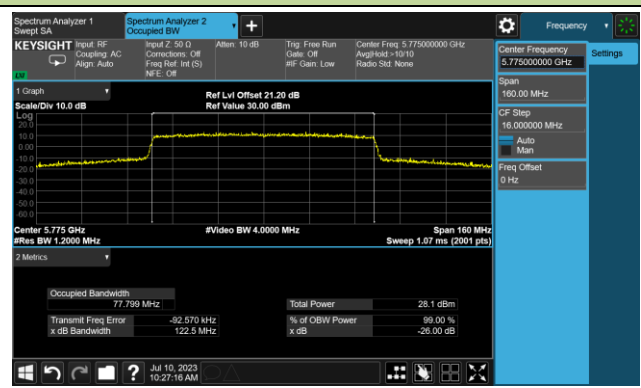


A.3 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-09 ~ 2023-10-24		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	144	5720	3.239	≥0.5
11a	6Mbps	149	5745	16.290	≥0.5
11a	6Mbps	157	5785	16.310	≥0.5
11a	6Mbps	165	5825	16.320	≥0.5
11ac-VHT20	MCS0	144	5720	3.855	≥0.5
11ac-VHT20	MCS0	149	5745	17.160	≥0.5
11ac-VHT20	MCS0	157	5785	17.300	≥0.5
11ac-VHT20	MCS0	165	5825	17.560	≥0.5
11ac-VHT40	MCS0	142	5710	3.263	≥0.5
11ac-VHT40	MCS0	151	5755	36.300	≥0.5
11ac-VHT40	MCS0	159	5795	35.940	≥0.5
11ac-VHT80	MCS0	138	5690	3.168	≥0.5
11ac-VHT80	MCS0	155	5775	75.160	≥0.5
11ax-HE20	MCS0	144	5720	4.533	≥0.5
11ax-HE20	MCS0	149	5745	18.740	≥0.5
11ax-HE20	MCS0	157	5785	18.810	≥0.5
11ax-HE20	MCS0	165	5825	18.670	≥0.5
11ax-HE40	MCS0	142	5710	4.079	≥0.5
11ax-HE40	MCS0	151	5755	37.700	≥0.5
11ax-HE40	MCS0	159	5795	37.580	≥0.5
11ax-HE80	MCS0	138	5690	4.144	≥0.5
11ax-HE80	MCS0	155	5775	75.200	≥0.5

802.11a 6dB Bandwidth


Channel 144 (5720MHz)

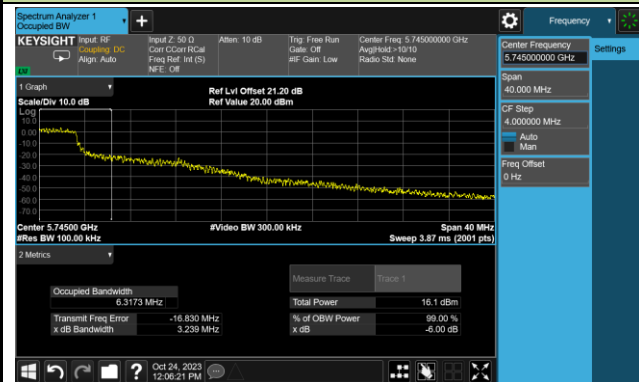


Channel 149 (5745MHz)

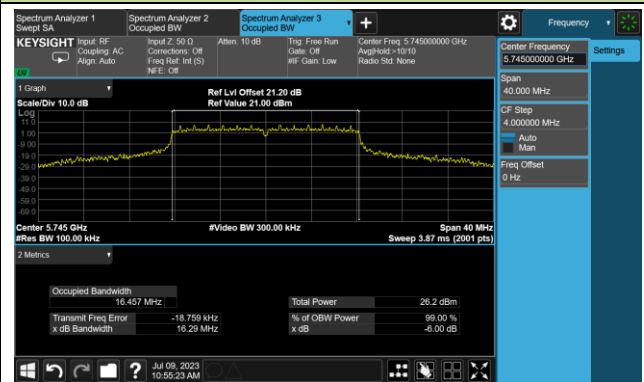

Channel 157 (5785MHz)

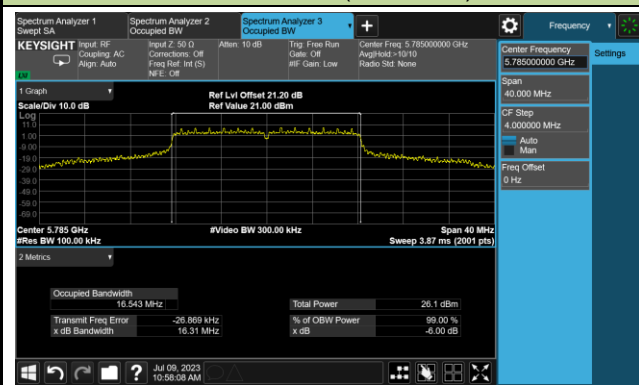


Channel 165 (5825MHz)

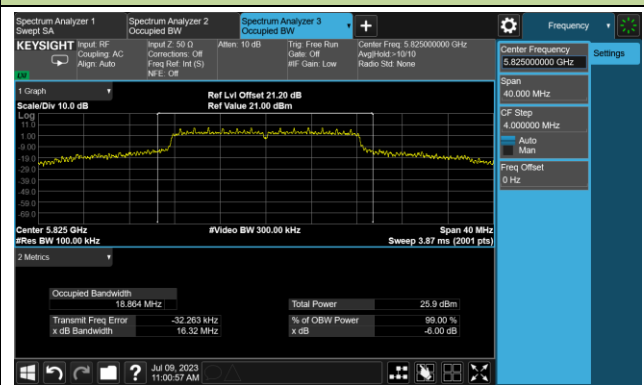


802.11ac-VHT20 6dB Bandwidth


Channel 144 (5720MHz)

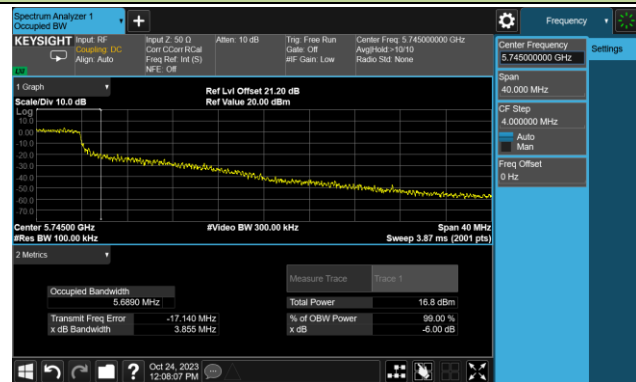


Channel 149 (5745MHz)

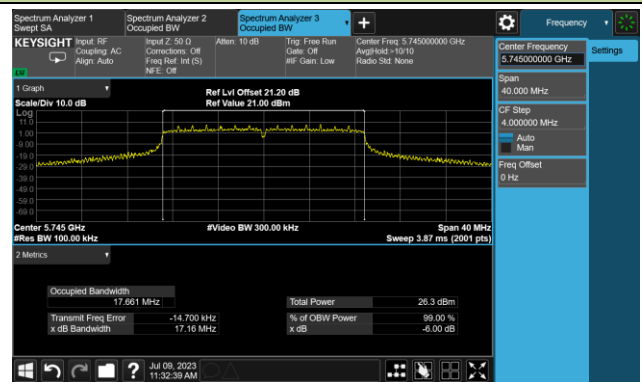

Channel 157 (5785MHz)

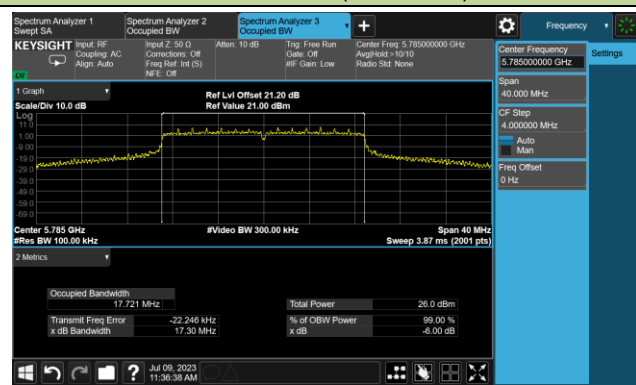


Channel 165 (5825MHz)

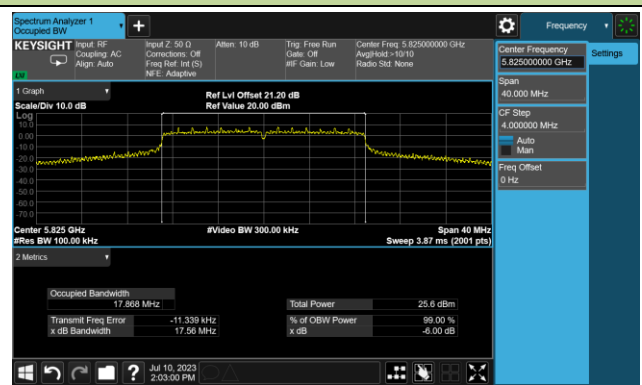


802.11ac-VHT40 6dB Bandwidth


Channel 142 (5710MHz)

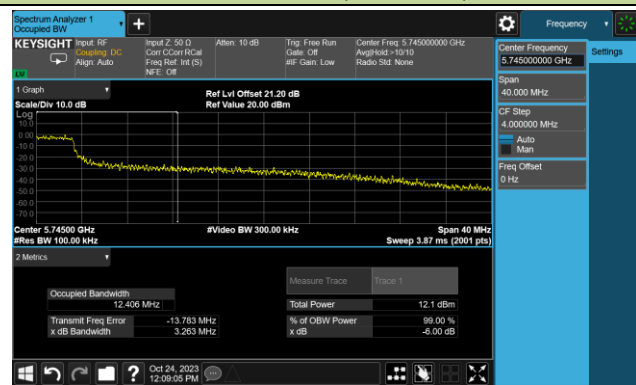


Channel 151 (5755MHz)

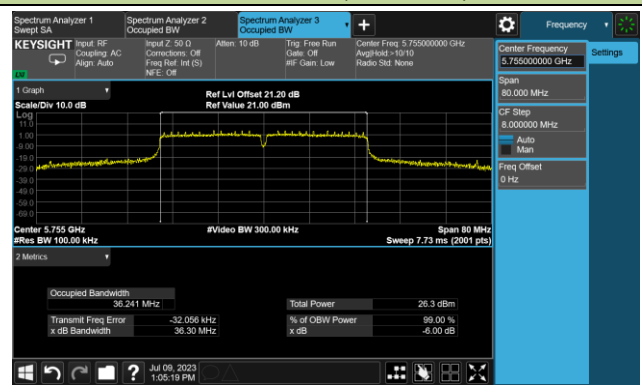


Channel 159 (5795MHz)

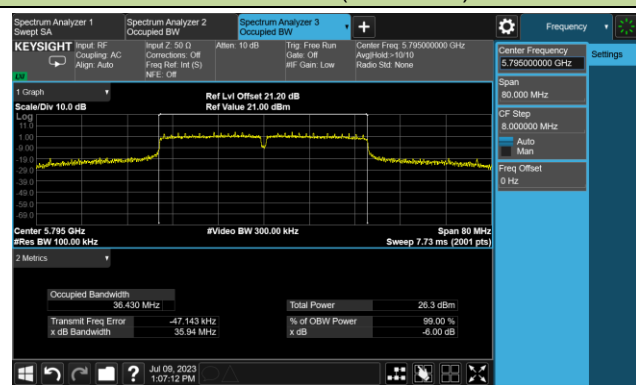

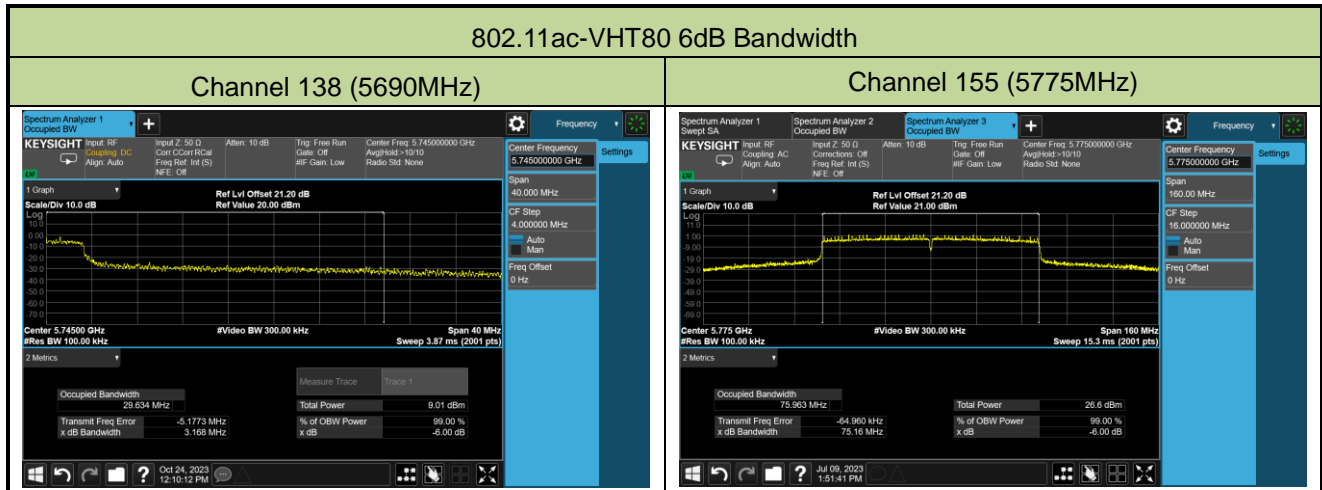


802.11ax-HE20 6dB Bandwidth


Channel 144 (5720MHz)

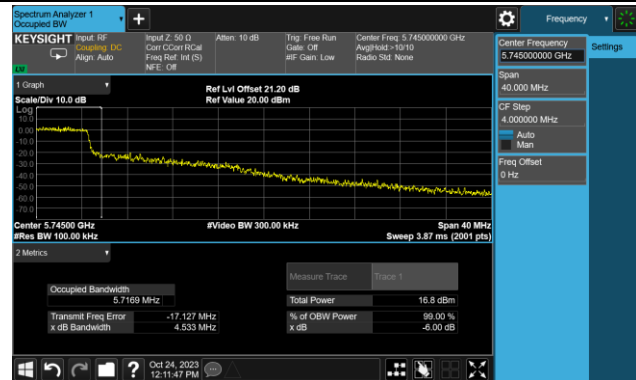


Channel 149 (5745MHz)

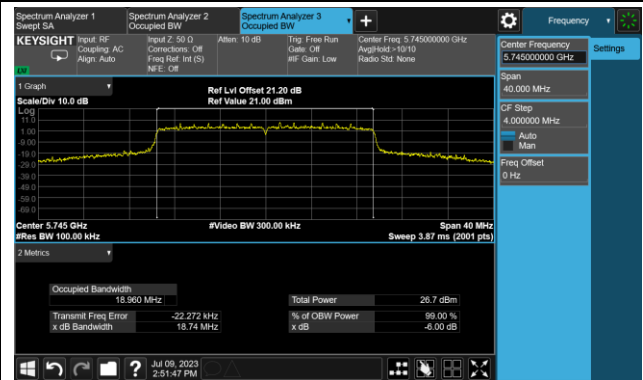

Channel 157 (5785MHz)

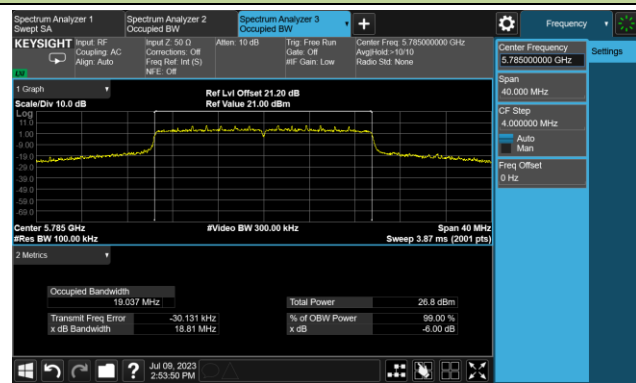


Channel 165 (5825MHz)

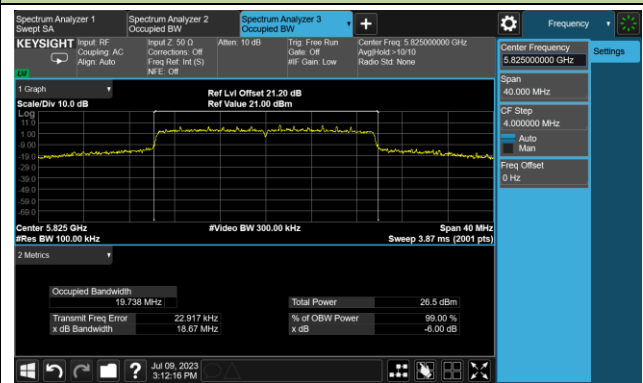


802.11ac-VHT40 6dB Bandwidth


Channel 142 (5710MHz)

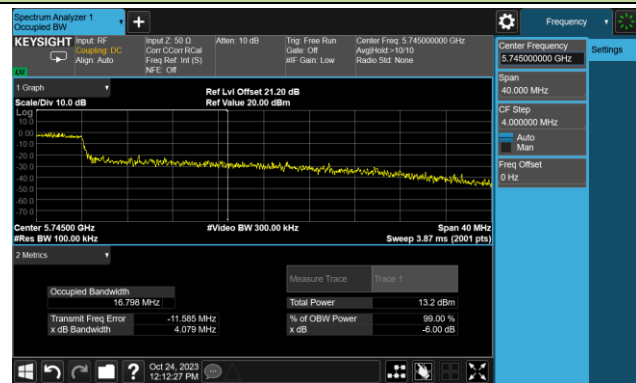


Channel 151 (5755MHz)

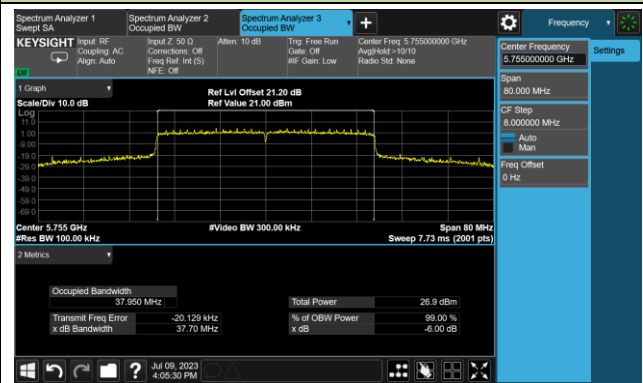

Channel 159 (5795MHz)

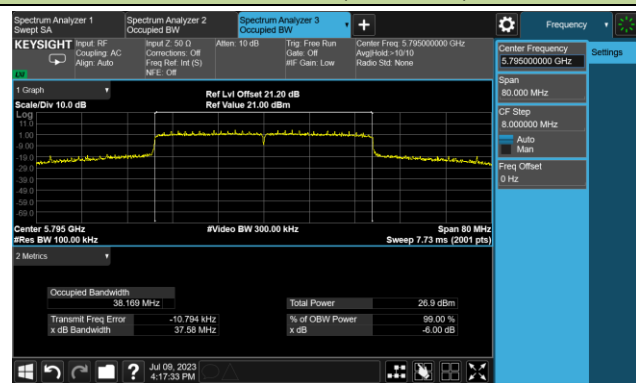

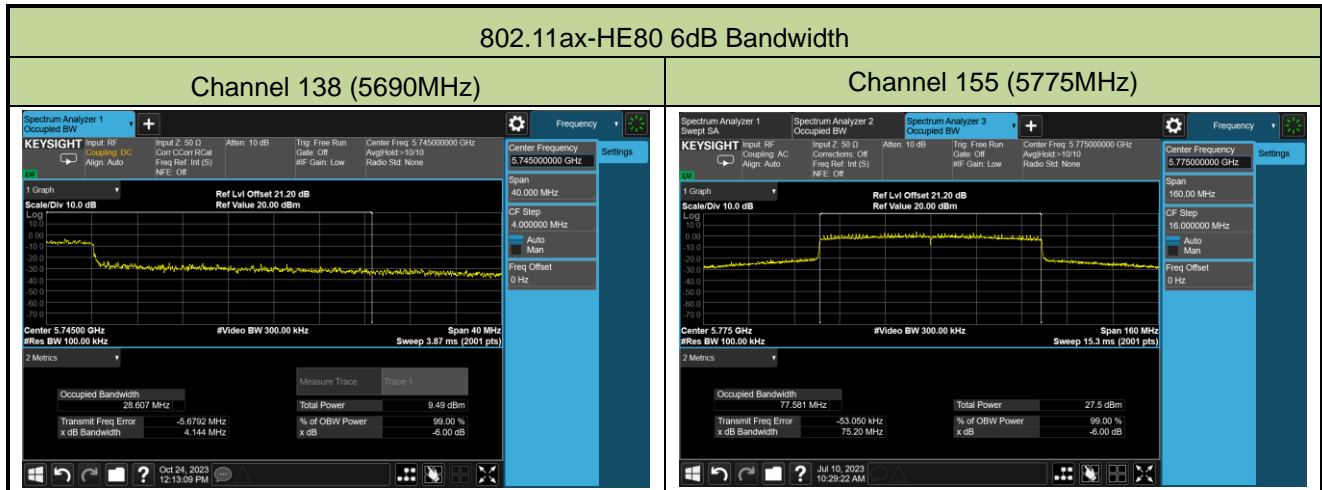

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-11		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Power (dBm)	Limit (dBm)
				Ant 0	Ant 1		
11a	6Mbps	36	5180	16.89	17.20	20.06	≤ 30.00
11a	6Mbps	44	5220	18.56	18.78	21.68	≤ 30.00
11a	6Mbps	48	5240	18.31	18.62	21.48	≤ 30.00
11a	6Mbps	52	5260	18.50	18.46	21.49	≤ 23.79
11a	6Mbps	60	5300	18.37	18.54	21.47	≤ 23.79
11a	6Mbps	64	5320	17.73	18.02	20.89	≤ 23.79
11a	6Mbps	100	5500	17.92	18.11	21.03	≤ 23.79
11a	6Mbps	116	5580	18.39	18.53	21.47	≤ 23.79
11a	6Mbps	140	5700	15.66	15.79	18.74	≤ 23.79
11a	6Mbps	144	5720	18.25	18.54	21.41	≤ 23.49
11a	6Mbps	149	5745	18.88	18.71	21.81	≤ 30.00
11a	6Mbps	157	5785	18.46	18.58	21.53	≤ 30.00
11a	6Mbps	165	5825	18.54	18.36	21.46	≤ 30.00
11ac-VHT20	MCS0	36	5180	16.45	16.75	19.61	≤ 30.00
11ac-VHT20	MCS0	44	5220	18.45	18.83	21.65	≤ 30.00
11ac-VHT20	MCS0	48	5240	18.39	18.55	21.48	≤ 30.00
11ac-VHT20	MCS0	52	5260	18.41	18.59	21.51	≤ 23.98
11ac-VHT20	MCS0	60	5300	18.38	18.57	21.49	≤ 23.98
11ac-VHT20	MCS0	64	5320	17.23	17.49	20.37	≤ 23.98
11ac-VHT20	MCS0	100	5500	16.88	17.01	19.96	≤ 23.98
11ac-VHT20	MCS0	116	5580	18.36	18.62	21.50	≤ 23.98
11ac-VHT20	MCS0	140	5700	16.78	17.18	19.99	≤ 23.98
11ac-VHT20	MCS0	144	5720	18.29	18.65	21.48	≤ 23.60
11ac-VHT20	MCS0	149	5745	18.85	18.77	21.82	≤ 30.00
11ac-VHT20	MCS0	157	5785	18.50	18.70	21.61	≤ 30.00
11ac-VHT20	MCS0	165	5825	18.58	18.44	21.52	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Power (dBm)	Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT40	MCS0	38	5190	16.11	16.44	19.29	≤ 30.00
11ac-VHT40	MCS0	46	5230	18.34	18.58	21.47	≤ 30.00
11ac-VHT40	MCS0	54	5270	18.59	18.84	21.73	≤ 23.98
11ac-VHT40	MCS0	62	5310	17.02	17.21	20.13	≤ 23.98
11ac-VHT40	MCS0	102	5510	17.54	17.61	20.59	≤ 23.98
11ac-VHT40	MCS0	110	5550	18.38	18.82	21.62	≤ 23.98
11ac-VHT40	MCS0	134	5670	18.15	18.42	21.30	≤ 23.98
11ac-VHT40	MCS0	142	5710	18.01	18.46	21.25	≤ 23.98
11ac-VHT40	MCS0	151	5755	18.81	18.77	21.80	≤ 30.00
11ac-VHT40	MCS0	159	5795	18.49	18.56	21.54	≤ 30.00
11ac-VHT80	MCS0	42	5210	14.66	15.09	17.89	≤ 30.00
11ac-VHT80	MCS0	58	5290	15.85	16.12	19.00	≤ 23.98
11ac-VHT80	MCS0	106	5530	16.00	16.28	19.15	≤ 23.98
11ac-VHT80	MCS0	122	5610	18.25	18.34	21.31	≤ 23.98
11ac-VHT80	MCS0	138	5690	18.53	18.75	21.65	≤ 23.98
11ac-VHT80	MCS0	155	5775	18.47	18.71	21.60	≤ 30.00
11ax-HE20	MCS0	36	5180	16.47	16.76	19.63	≤ 30.00
11ax-HE20	MCS0	44	5220	18.58	18.88	21.74	≤ 30.00
11ax-HE20	MCS0	48	5240	18.45	18.54	21.51	≤ 30.00
11ax-HE20	MCS0	52	5260	18.40	18.64	21.53	≤ 23.98
11ax-HE20	MCS0	60	5300	18.41	18.55	21.49	≤ 23.98
11ax-HE20	MCS0	64	5320	17.80	18.06	20.94	≤ 23.98
11ax-HE20	MCS0	100	5500	18.42	18.68	21.56	≤ 23.98
11ax-HE20	MCS0	116	5580	18.32	18.57	21.46	≤ 23.98
11ax-HE20	MCS0	140	5700	17.04	17.15	20.11	≤ 23.98
11ax-HE20	MCS0	144	5720	18.26	18.60	21.44	≤ 23.59
11ax-HE20	MCS0	149	5745	18.75	18.72	21.75	≤ 30.00
11ax-HE20	MCS0	157	5785	18.46	18.58	21.53	≤ 30.00
11ax-HE20	MCS0	165	5825	18.52	18.30	21.42	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Power (dBm)	Limit (dBm)
				Ant 0	Ant 1		
11ax-HE40	MCS0	38	5190	16.16	16.54	19.36	≤ 30.00
11ax-HE40	MCS0	46	5230	18.21	18.45	21.34	≤ 30.00
11ax-HE40	MCS0	54	5270	18.44	18.66	21.56	≤ 23.98
11ax-HE40	MCS0	62	5310	16.49	16.82	19.67	≤ 23.98
11ax-HE40	MCS0	102	5510	17.54	17.63	20.60	≤ 23.98
11ax-HE40	MCS0	110	5550	18.40	18.66	21.54	≤ 23.98
11ax-HE40	MCS0	134	5670	17.66	17.85	20.77	≤ 23.98
11ax-HE40	MCS0	142	5710	18.50	18.84	21.68	≤ 23.98
11ax-HE40	MCS0	151	5755	18.70	18.62	21.67	≤ 30.00
11ax-HE40	MCS0	159	5795	18.42	18.64	21.54	≤ 30.00
11ax-HE80	MCS0	42	5210	15.24	15.65	18.46	≤ 30.00
11ax-HE80	MCS0	58	5290	14.93	15.35	18.16	≤ 23.98
11ax-HE80	MCS0	106	5530	16.06	16.32	19.20	≤ 23.98
11ax-HE80	MCS0	122	5610	18.77	18.82	21.81	≤ 23.98
11ax-HE80	MCS0	138	5690	18.56	18.84	21.71	≤ 23.98
11ax-HE80	MCS0	155	5775	18.59	18.74	21.68	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10} (18.99) = 23.79 < 23.98$ dBm

802.11ac-VHT20: $11 + 10 \log_{10} (20.10) = 24.03 > 23.98$ dBm

802.11ax-HE20: $11 + 10 \log_{10} (21.07) = 24.24 > 23.98$ dBm

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: $11 + 10 \log_{10} B > 23.98$ dBm

Note 3: For straddle channel, the conducted power limit is as below.

802.11a CH144: $11 + 10 \log_{10} (B) = 23.49$ dBm, $B = 25.51/2 + 5 = 17.755$ MHz.

802.11ac-VHT20 CH144: $11 + 10 \log_{10} (B) = 23.60$ dBm, $B = 26.36/2 + 5 = 18.18$ MHz.

802.11ax-HE20 CH144: $11 + 10 \log_{10} (B) = 23.59$ dBm, $B = 26.30/2 + 5 = 18.15$ MHz.

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: $11 + 10 \log_{10}(B) > 23.98$ dBm.

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2023-07-06~2023-07-09		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11a	6Mbps	36	5180	4.743	4.801	93.38	8.080	≤ 16.69
11a	6Mbps	44	5220	6.166	6.529	93.38	9.659	≤ 16.69
11a	6Mbps	48	5240	6.064	6.318	93.38	9.501	≤ 16.69
11a	6Mbps	52	5260	6.182	6.325	93.38	9.562	≤ 10.69
11a	6Mbps	60	5300	6.244	6.408	93.38	9.635	≤ 10.69
11a	6Mbps	64	5320	5.939	5.836	93.38	9.196	≤ 10.69
11a	6Mbps	100	5500	5.579	5.791	93.38	8.994	≤ 10.69
11a	6Mbps	116	5580	6.472	6.465	93.38	9.776	≤ 10.69
11a	6Mbps	140	5700	3.917	4.170	93.38	7.353	≤ 10.69
11a	6Mbps	144	5720	6.869	6.800	93.38	10.142	≤ 10.69
11ac-VHT20	MCS0	36	5180	3.423	3.950	94.93	6.931	≤ 16.69
11ac-VHT20	MCS0	44	5220	5.527	5.793	94.93	8.898	≤ 16.69
11ac-VHT20	MCS0	48	5240	5.075	5.484	94.93	8.521	≤ 16.69
11ac-VHT20	MCS0	52	5260	5.222	5.561	94.93	8.631	≤ 10.69
11ac-VHT20	MCS0	60	5300	5.628	5.804	94.93	8.953	≤ 10.69
11ac-VHT20	MCS0	64	5320	4.782	4.860	94.93	8.057	≤ 10.69
11ac-VHT20	MCS0	100	5500	3.811	4.445	94.93	7.376	≤ 10.69
11ac-VHT20	MCS0	116	5580	5.287	5.399	94.93	8.580	≤ 10.69
11ac-VHT20	MCS0	140	5700	4.614	5.010	94.93	8.053	≤ 10.69
11ac-VHT20	MCS0	144	5720	6.129	6.174	94.93	9.388	≤ 10.69
11ac-VHT40	MCS0	38	5190	0.716	1.226	92.34	4.335	≤ 16.69
11ac-VHT40	MCS0	46	5230	2.375	2.774	92.34	5.935	≤ 16.69
11ac-VHT40	MCS0	54	5270	2.740	2.916	92.34	6.185	≤ 10.69
11ac-VHT40	MCS0	62	5310	1.798	2.296	92.34	5.411	≤ 10.69
11ac-VHT40	MCS0	102	5510	2.413	2.459	92.34	5.792	≤ 10.69
11ac-VHT40	MCS0	110	5550	2.632	2.734	92.34	6.040	≤ 10.69
11ac-VHT40	MCS0	134	5670	2.713	3.126	92.34	6.281	≤ 10.69
11ac-VHT40	MCS0	142	5710	3.321	3.235	92.34	6.635	≤ 10.69

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS0	42	5210	-3.970	-3.240	94.55	-0.336	≤ 16.69
11ac-VHT80	MCS0	58	5290	-2.352	-2.189	94.55	0.984	≤ 10.69
11ac-VHT80	MCS0	106	5530	-2.382	-1.996	94.55	1.069	≤ 10.69
11ac-VHT80	MCS0	122	5610	-0.057	-0.040	94.55	3.205	≤ 10.69
11ac-VHT80	MCS0	138	5690	-0.036	0.134	94.55	3.304	≤ 10.69
11ax-HE20	MCS0	36	5180	3.566	3.988	94.29	7.048	≤ 16.69
11ax-HE20	MCS0	44	5220	5.388	5.598	94.29	8.760	≤ 16.69
11ax-HE20	MCS0	48	5240	4.695	5.185	94.29	8.213	≤ 16.69
11ax-HE20	MCS0	52	5260	5.657	5.941	94.29	9.067	≤ 10.69
11ax-HE20	MCS0	60	5300	5.779	6.034	94.29	9.174	≤ 10.69
11ax-HE20	MCS0	64	5320	5.193	5.402	94.29	8.564	≤ 10.69
11ax-HE20	MCS0	100	5500	5.742	6.037	94.29	9.158	≤ 10.69
11ax-HE20	MCS0	116	5580	5.668	5.841	94.29	9.021	≤ 10.69
11ax-HE20	MCS0	140	5700	4.475	4.510	94.29	7.758	≤ 10.69
11ax-HE20	MCS0	144	5720	5.546	5.911	94.29	8.998	≤ 10.69
11ax-HE40	MCS0	38	5190	0.470	0.981	93.97	4.013	≤ 16.69
11ax-HE40	MCS0	46	5230	2.856	3.136	93.97	6.279	≤ 16.69
11ax-HE40	MCS0	54	5270	3.136	3.565	93.97	6.636	≤ 10.69
11ax-HE40	MCS0	62	5310	1.162	1.459	93.97	4.593	≤ 10.69
11ax-HE40	MCS0	102	5510	2.038	2.401	93.97	5.504	≤ 10.69
11ax-HE40	MCS0	110	5550	3.041	3.436	93.97	6.523	≤ 10.69
11ax-HE40	MCS0	134	5670	2.288	2.494	93.97	5.673	≤ 10.69
11ax-HE40	MCS0	142	5710	3.209	3.713	93.97	6.749	≤ 10.69
11ax-HE80	MCS0	42	5210	-3.417	-3.035	93.94	0.060	≤ 16.69
11ax-HE80	MCS0	58	5290	-3.382	-2.791	93.94	0.205	≤ 10.69
11ax-HE80	MCS0	106	5530	-2.283	-1.997	93.94	1.144	≤ 10.69
11ax-HE80	MCS0	122	5610	0.637	0.672	93.94	3.936	≤ 10.69
11ax-HE80	MCS0	138	5690	0.422	0.686	93.94	3.838	≤ 10.69

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.

Note 2: For 5125 - 5250MHz Band: PSD Limit (dBm/MHz) = 17 - (6.31 - 6) = 16.69dBm/MHz

For 5250 - 5350MHz Band: Average Power Limit (dBm) = 11 - (6.31 - 6) = 10.69dBm/MHz.

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-07~2023-07-09		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)		Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1			
11a	6Mbps	149	5745	4.049	4.377	93.38	7.524	≤ 29.69
11a	6Mbps	157	5785	3.589	3.694	93.38	6.950	≤ 29.69
11a	6Mbps	165	5825	3.084	3.464	93.38	6.586	≤ 29.69
11ac-VHT20	MCS0	149	5745	3.620	3.990	94.93	7.045	≤ 29.69
11ac-VHT20	MCS0	157	5785	3.202	3.525	94.93	6.603	≤ 29.69
11ac-VHT20	MCS0	165	5825	2.792	3.191	94.93	6.232	≤ 29.69
11ac-VHT40	MCS0	151	5755	0.609	1.021	92.34	4.176	≤ 29.69
11ac-VHT40	MCS0	159	5795	0.219	0.356	92.34	3.644	≤ 29.69
11ac-VHT80	MCS0	155	5775	-3.097	-2.586	94.55	0.420	≤ 29.69
11ax-HE20	MCS0	149	5745	3.567	3.539	94.29	6.819	≤ 29.69
11ax-HE20	MCS0	157	5785	3.298	3.550	94.29	6.691	≤ 29.69
11ax-HE20	MCS0	165	5825	3.331	3.324	94.29	6.593	≤ 29.69
11ax-HE40	MCS0	151	5755	0.856	0.817	93.97	4.117	≤ 29.69
11ax-HE40	MCS0	159	5795	0.592	0.664	93.97	3.909	≤ 29.69
11ax-HE80	MCS0	155	5775	-2.125	-2.019	93.94	1.210	≤ 29.69

Note 1:


When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.


Note 2: PSD Limit (dBm/500KHz) = 30 - (6.31 - 6) = 29.69dBm/500KHz.

802.11a Power Spectral Density- Ant 0


Channel 36 (5180MHz)

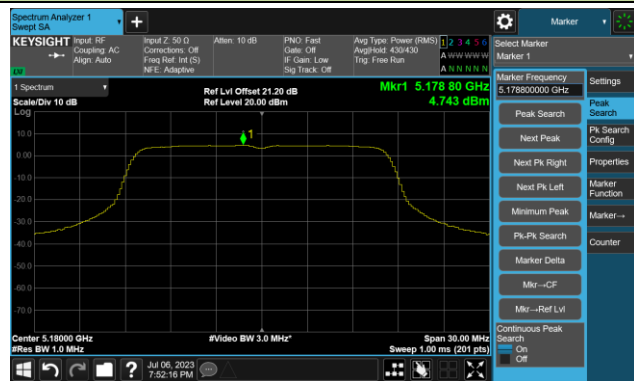


Channel 44 (5220MHz)

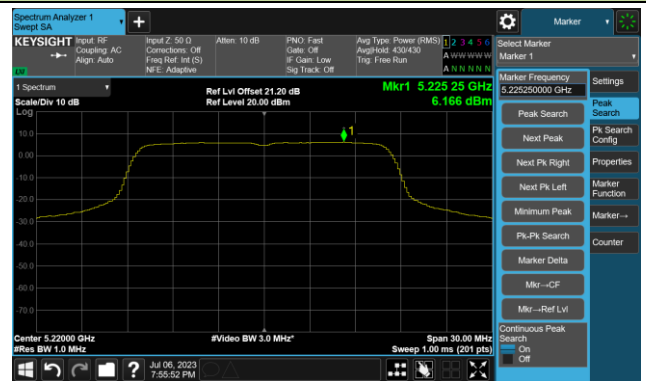


Channel 48 (5240MHz)

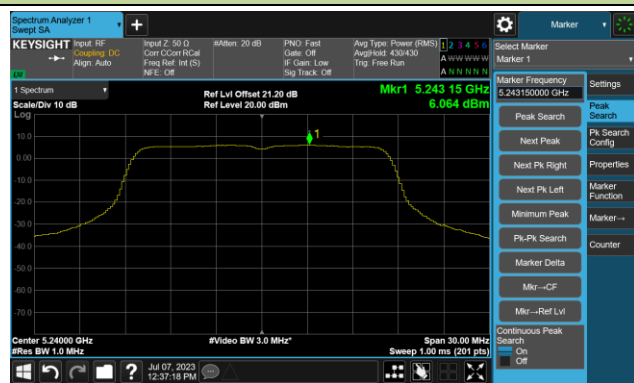

Channel 52 (5260MHz)

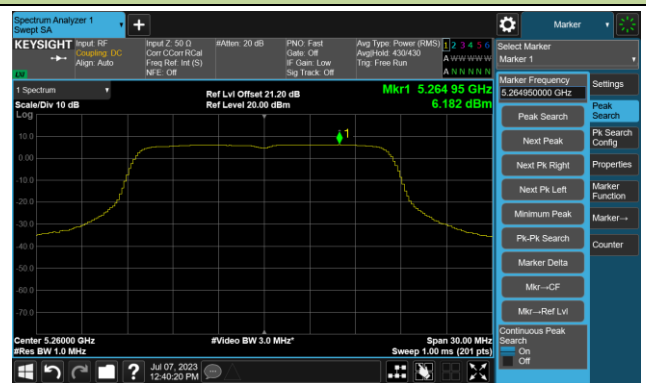



Channel 60 (5300MHz)

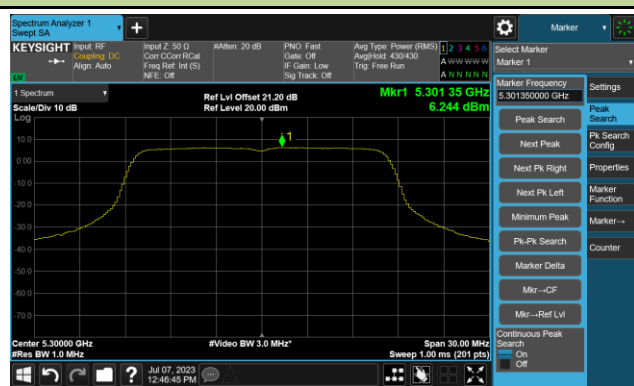

Channel 64 (5320MHz)




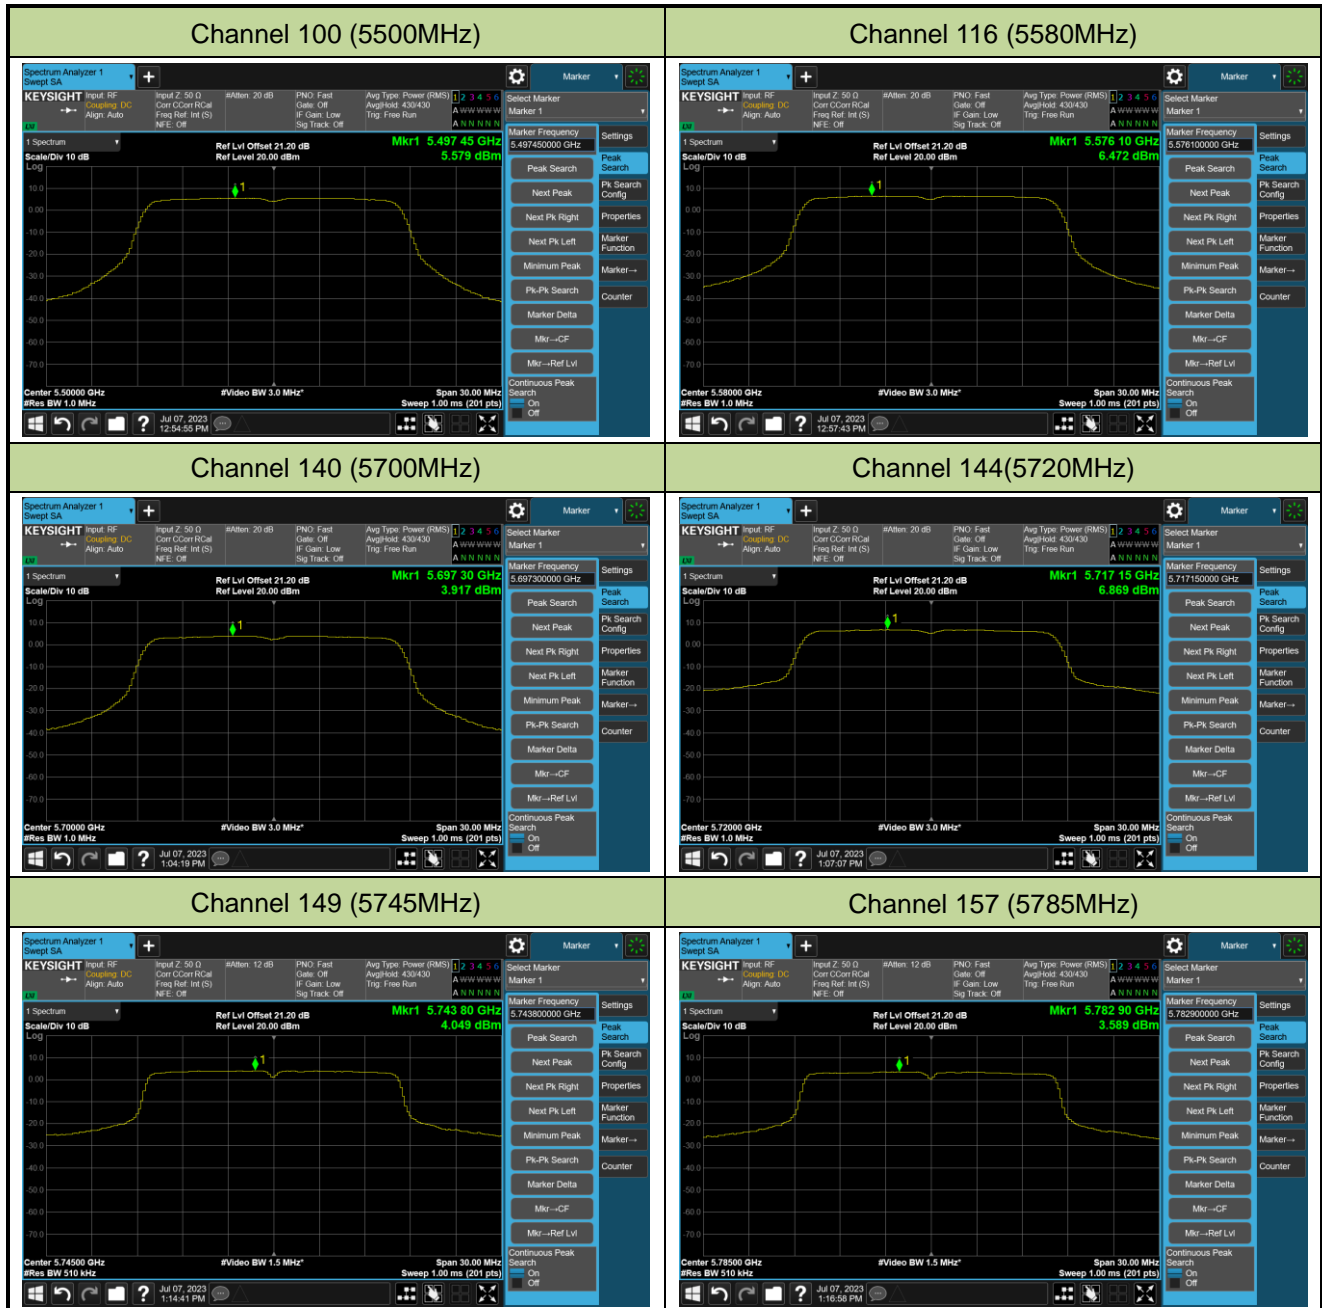

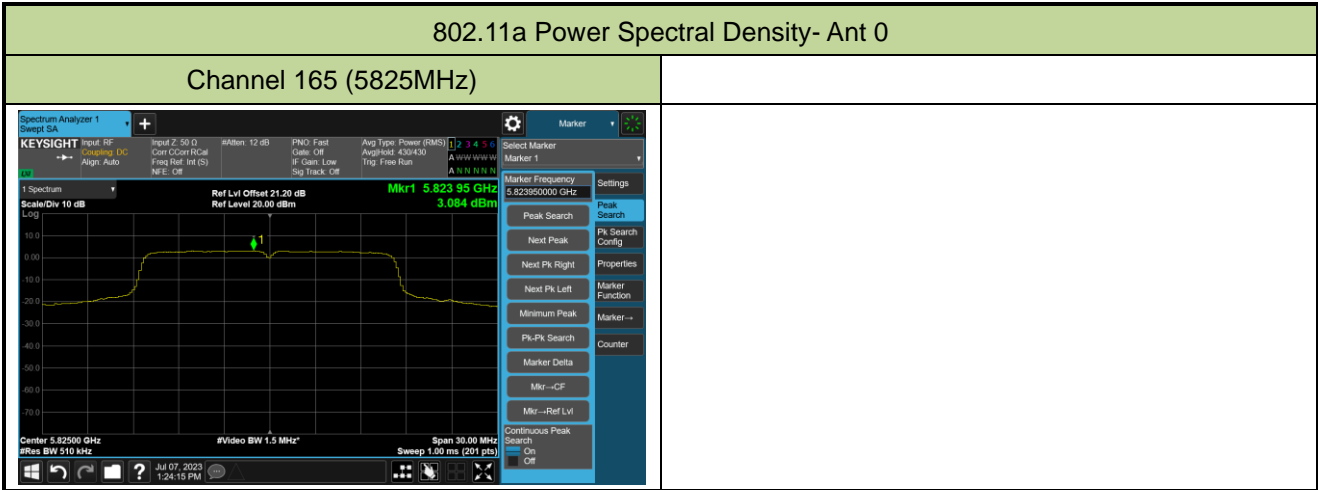

802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)

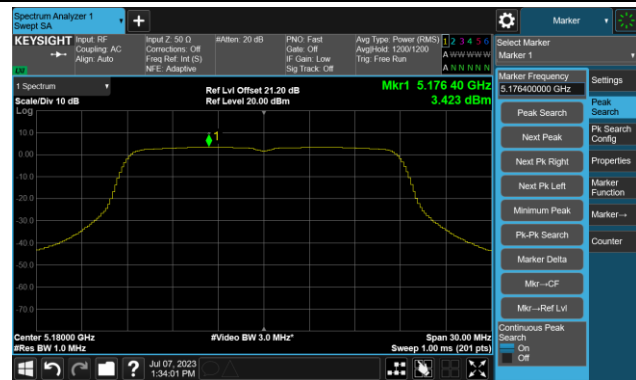

Channel 44 (5220MHz)



Channel 48 (5240MHz)

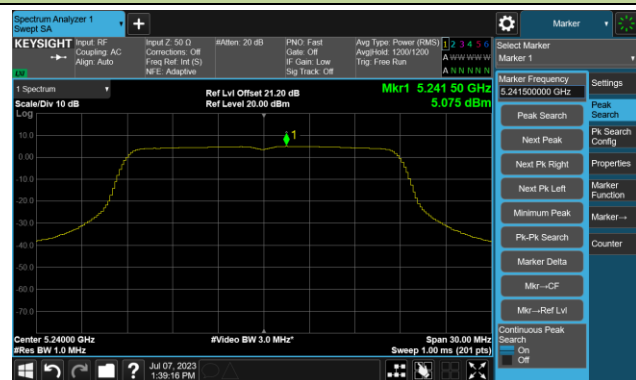

Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 100 (5500MHz)




Channel 116 (5580MHz)




Channel 140 (5700MHz)

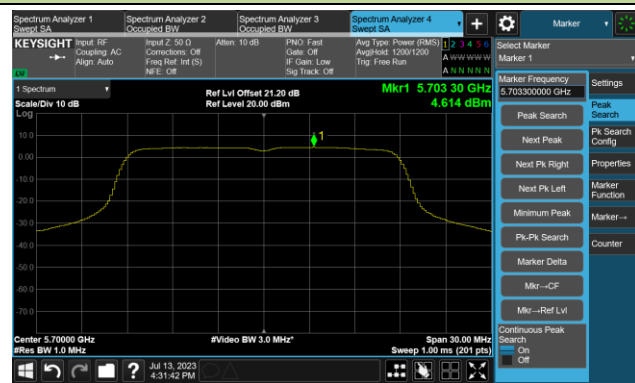


Channel 144(5720MHz)

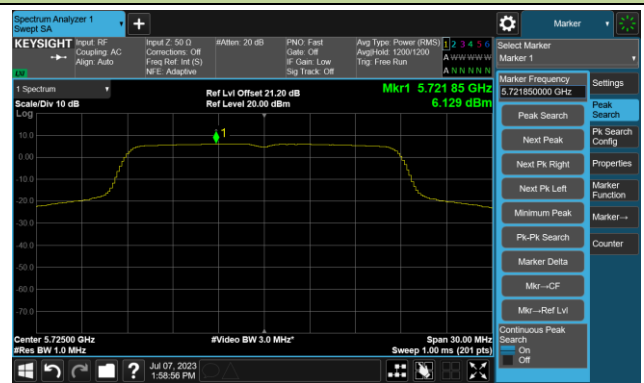

Channel 149 (5745MHz)

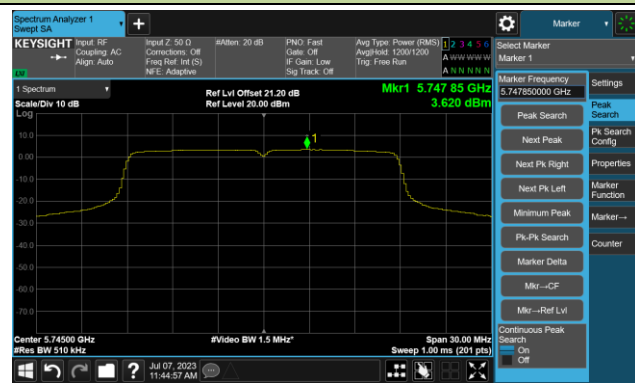

Channel 157 (5785MHz)

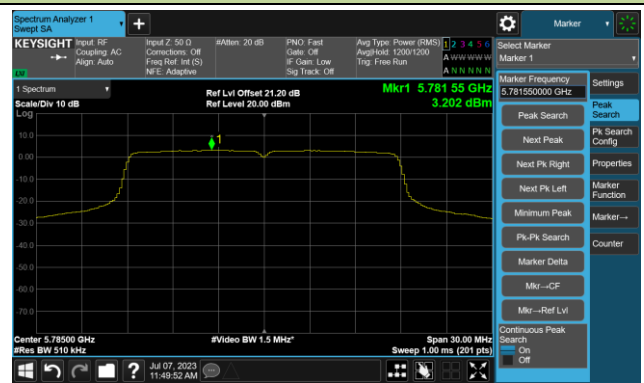


802.11ac-VHT20 Power Spectral Density- Ant 0

Channel 165 (5825MHz)




802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 38 (5190MHz)

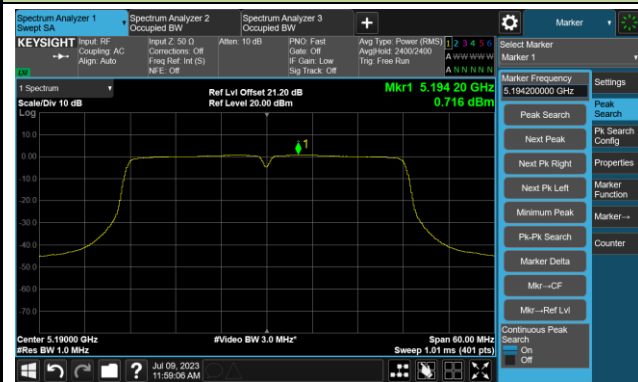


Channel 46 (5230MHz)

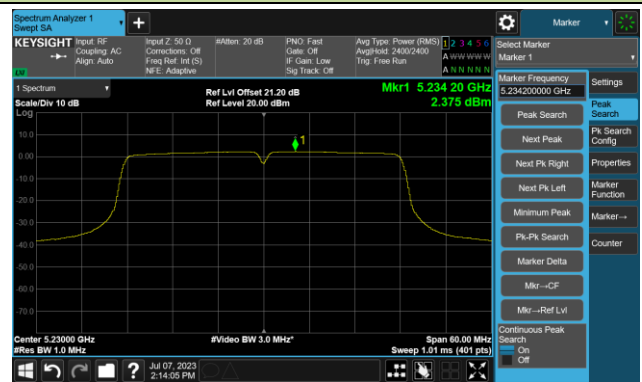


Channel 54 (5270MHz)

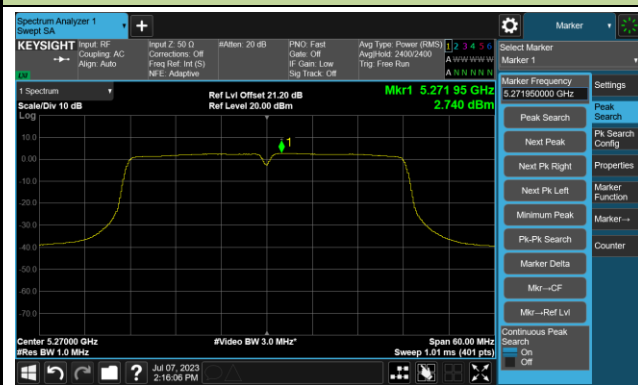

Channel 62 (5310MHz)

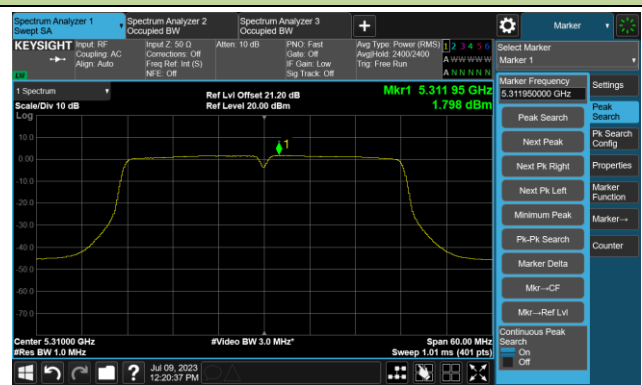

Channel 102 (5510MHz)

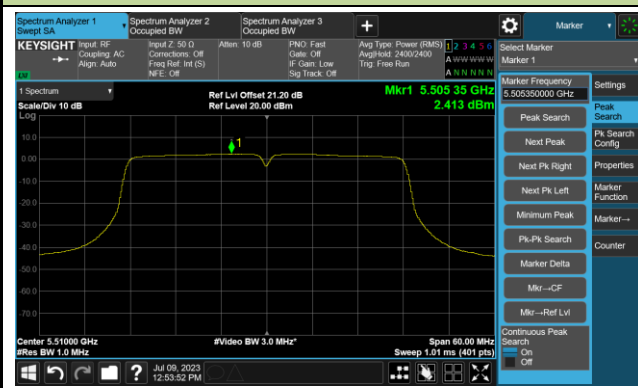


Channel 110 (5550MHz)



802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 134 (5670MHz)

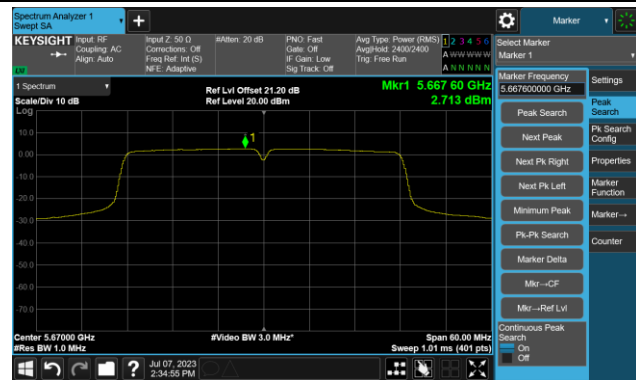


Channel 142(5710MHz)



Channel 151 (5755MHz)

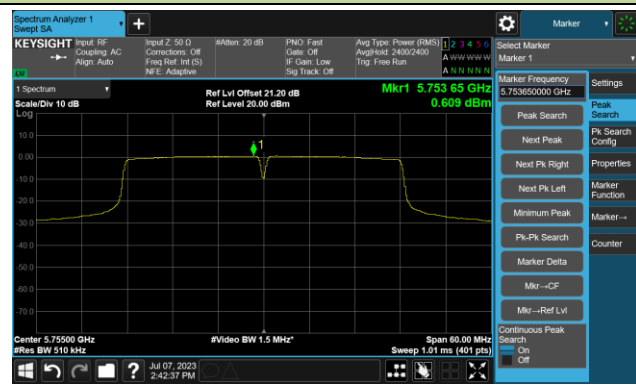


Channel 159 (5795MHz)

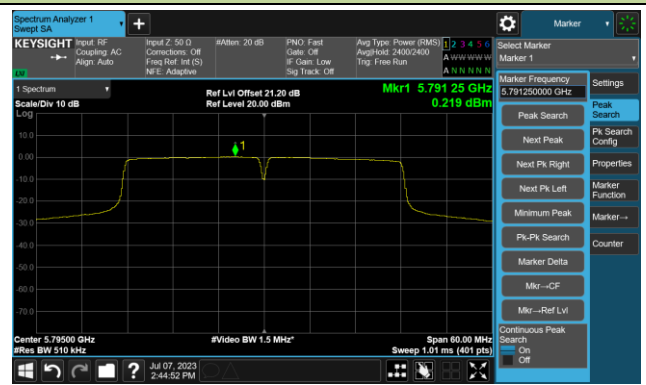


802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)

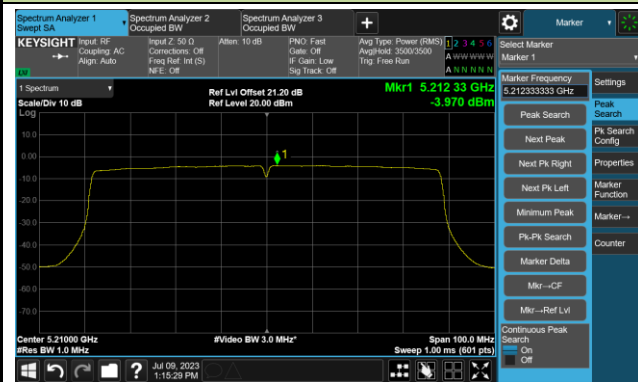


Channel 58 (5290MHz)

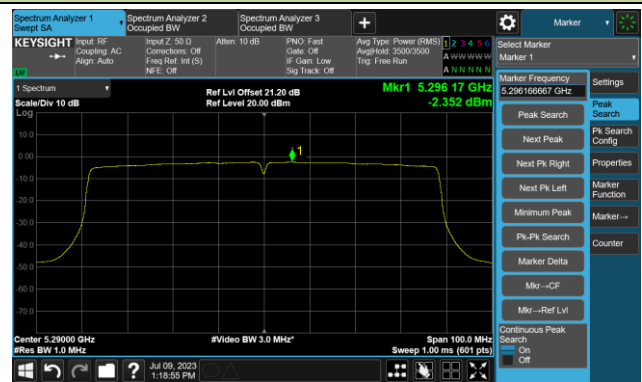


Channel 106 (5530MHz)

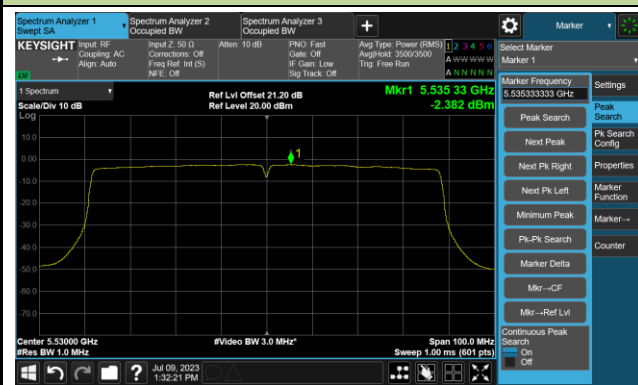

Channel 122 (5610MHz)

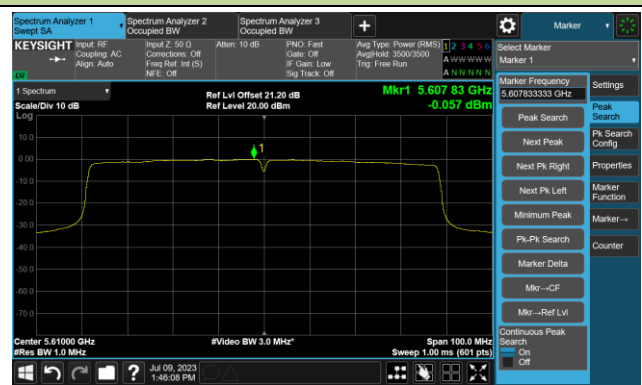

Channel 138 (5690MHz)

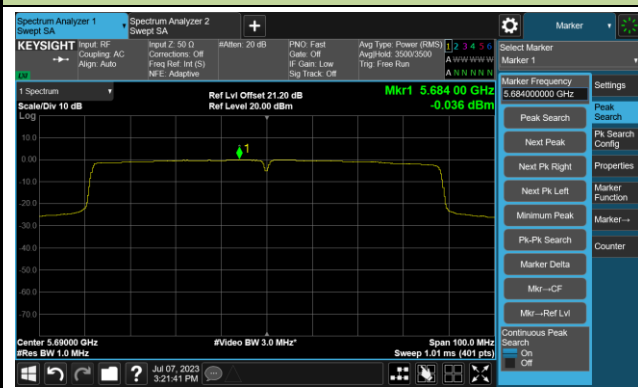

Channel 155 (5775MHz)

