


| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz | |

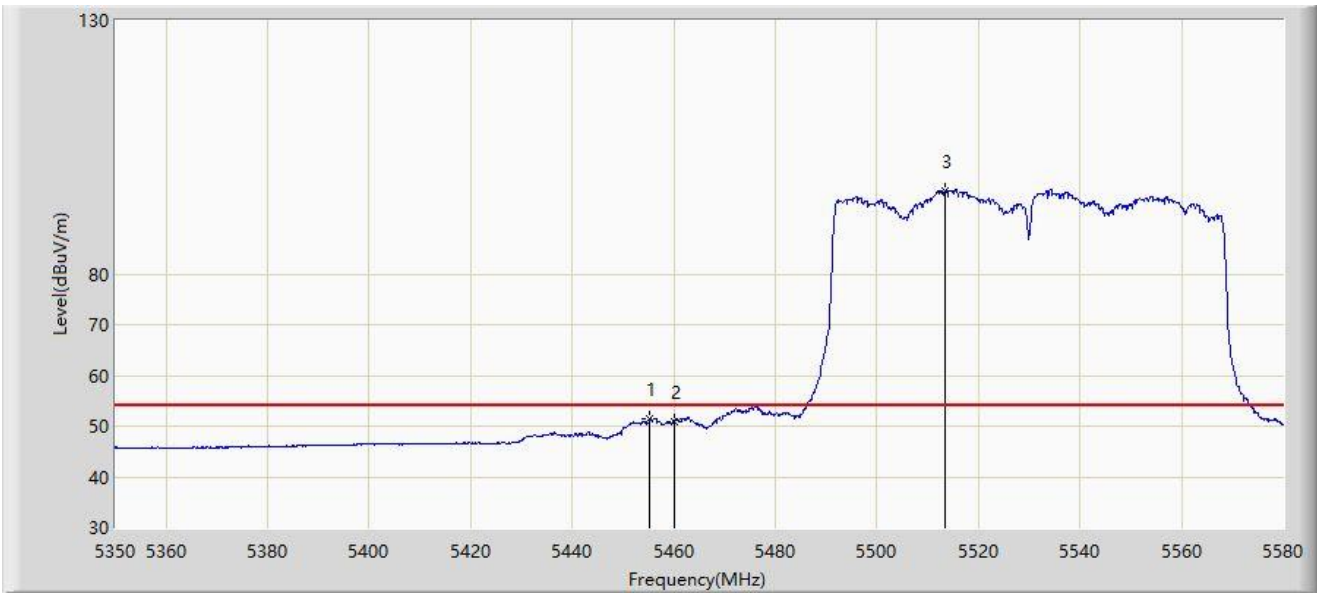

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5455.340 | 51.322 | 48.187 | -2.678 | 54.000 | 3.135 | AV |
| 2 | | 5460.000 | 50.795 | 47.576 | -3.205 | 54.000 | 3.219 | AV |
| 3 | | 5513.530 | 96.435 | 93.287 | N/A | N/A | 3.149 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5618.615 | 114.746 | 110.887 | N/A | N/A | 3.859 | PK |
| 2 | | 5725.000 | 60.598 | 55.910 | -7.602 | 68.200 | 4.688 | PK |
| 3 | * | 5737.365 | 67.247 | 62.751 | -0.953 | 68.200 | 4.496 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz | |

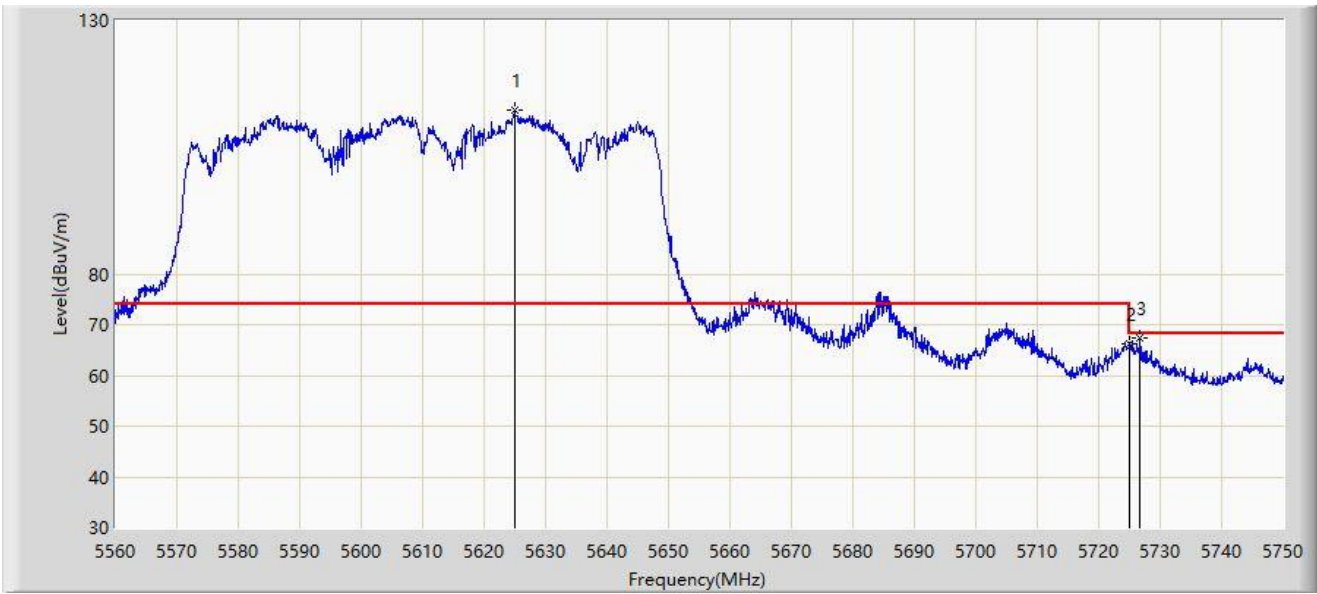


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5624.980 | 112.226 | 108.209 | N/A | N/A | 4.018 | PK |
| 2 | | 5725.000 | 66.228 | 61.540 | -1.972 | 68.200 | 4.688 | PK |
| 3 | * | 5726.725 | 67.268 | 62.581 | -0.932 | 68.200 | 4.687 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz | |

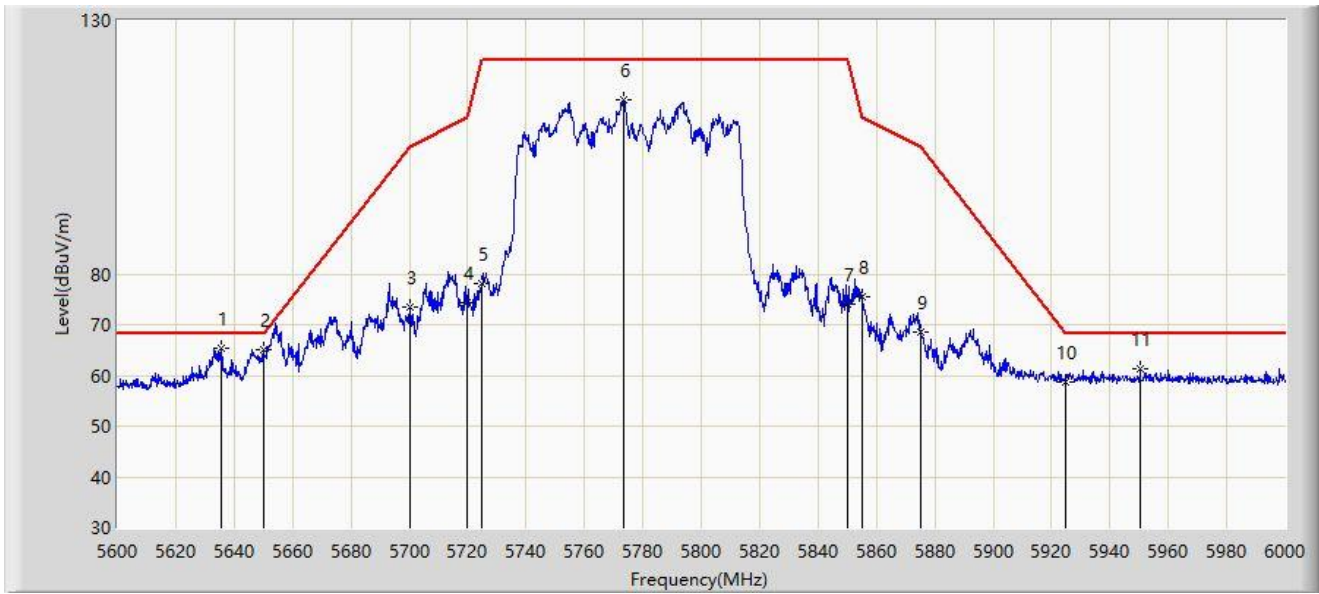


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5635.400 | 65.261 | 61.121 | -2.939 | 68.200 | 4.139 | PK |
| 2 | | 5650.000 | 64.951 | 60.791 | -3.249 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 73.383 | 68.953 | -31.817 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 74.212 | 69.562 | -36.588 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 78.157 | 73.469 | -44.043 | 122.200 | 4.688 | PK |
| 6 | | 5773.600 | 114.275 | 109.460 | N/A | N/A | 4.816 | PK |
| 7 | | 5850.000 | 73.920 | 68.960 | -48.280 | 122.200 | 4.960 | PK |
| 8 | | 5855.000 | 75.560 | 70.541 | -35.240 | 110.800 | 5.019 | PK |
| 9 | | 5875.000 | 68.513 | 63.377 | -36.687 | 105.200 | 5.136 | PK |
| 10 | | 5925.000 | 58.816 | 53.546 | -9.384 | 68.200 | 5.271 | PK |
| 11 | | 5950.400 | 61.171 | 55.784 | -7.029 | 68.200 | 5.388 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz | |

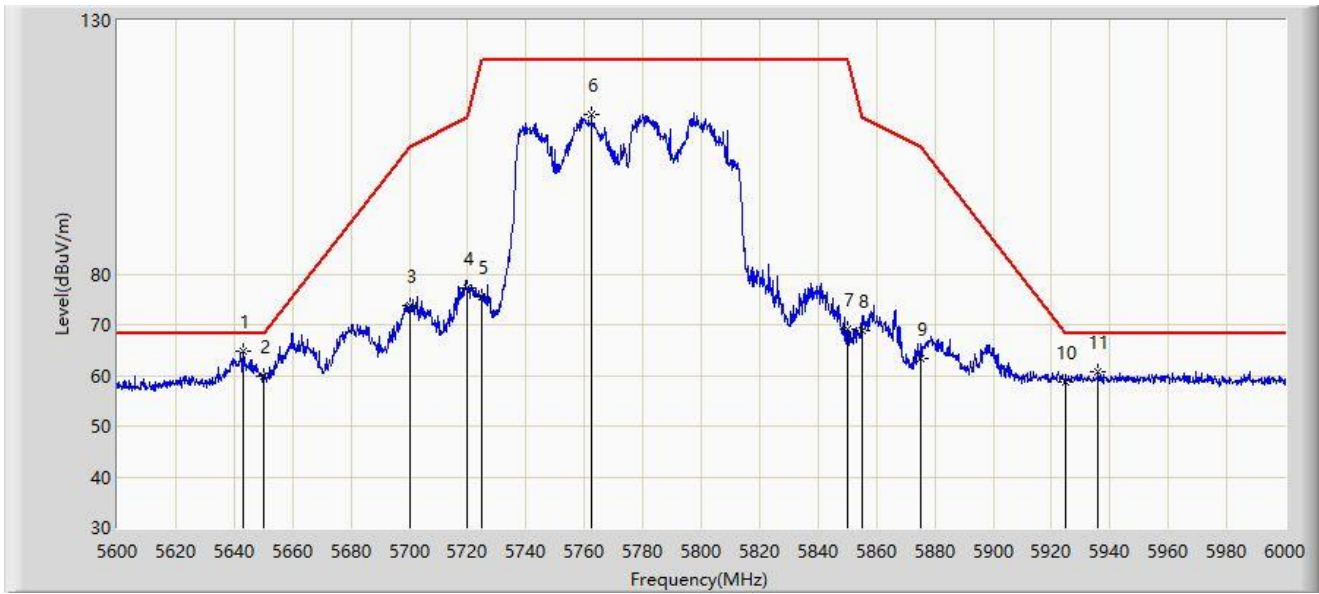


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5643.000 | 64.813 | 60.614 | -3.387 | 68.200 | 4.199 | PK |
| 2 | | 5650.000 | 59.796 | 55.636 | -8.404 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 73.793 | 69.363 | -31.407 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 77.340 | 72.690 | -33.460 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 75.492 | 70.804 | -46.708 | 122.200 | 4.688 | PK |
| 6 | | 5762.400 | 111.589 | 106.949 | N/A | N/A | 4.640 | PK |
| 7 | | 5850.000 | 69.153 | 64.193 | -53.047 | 122.200 | 4.960 | PK |
| 8 | | 5855.000 | 68.982 | 63.963 | -41.818 | 110.800 | 5.019 | PK |
| 9 | | 5875.000 | 63.399 | 58.263 | -41.801 | 105.200 | 5.136 | PK |
| 10 | | 5925.000 | 58.614 | 53.344 | -9.586 | 68.200 | 5.271 | PK |
| 11 | | 5936.000 | 60.738 | 55.426 | -7.462 | 68.200 | 5.312 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz | |

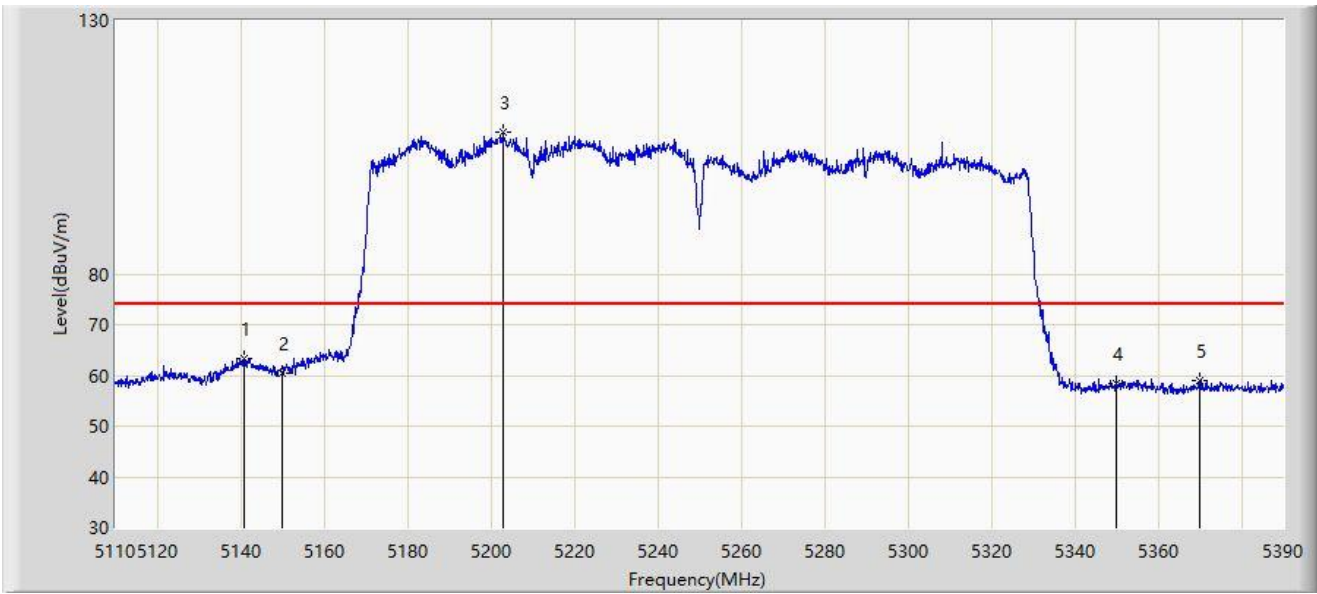


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5140.940 | 63.208 | 59.816 | -10.792 | 74.000 | 3.392 | PK |
| 2 | | 5150.000 | 60.545 | 57.046 | -13.455 | 74.000 | 3.499 | PK |
| 3 | | 5203.100 | 108.030 | 105.102 | N/A | N/A | 2.927 | PK |
| 4 | | 5350.000 | 58.524 | 55.693 | -15.476 | 74.000 | 2.832 | PK |
| 5 | | 5369.840 | 59.127 | 56.231 | -14.873 | 74.000 | 2.896 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz | |

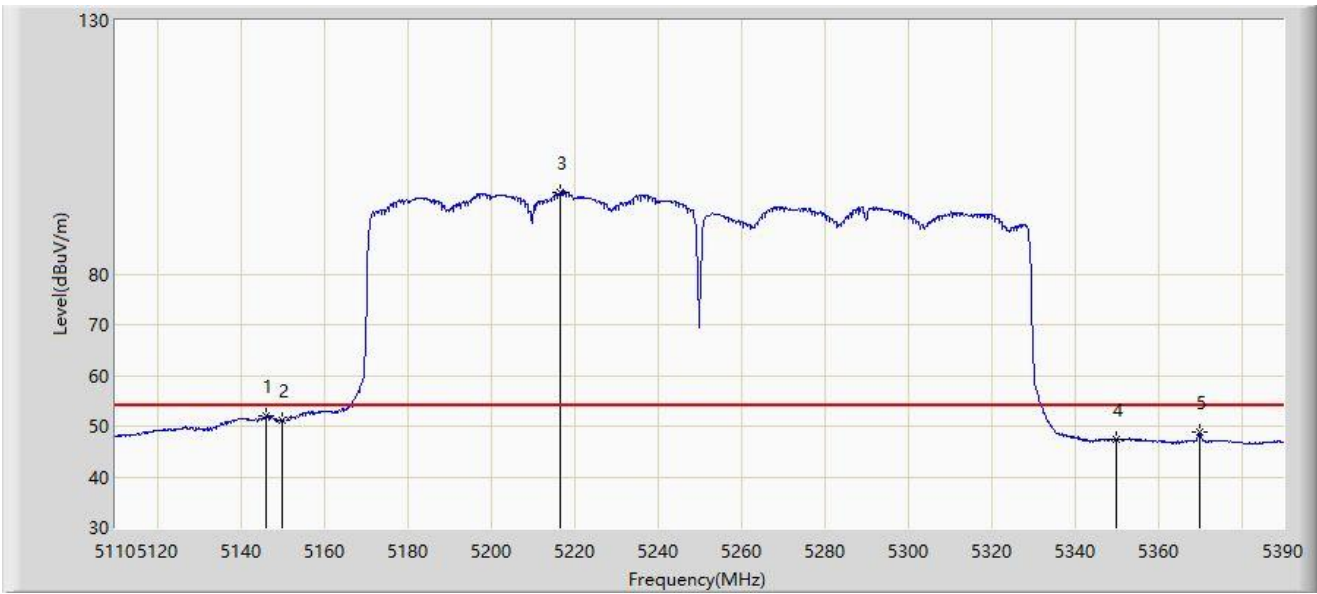


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5146.260 | 51.911 | 48.444 | -2.089 | 54.000 | 3.467 | AV |
| 2 | | 5150.000 | 51.276 | 47.777 | -2.724 | 54.000 | 3.499 | AV |
| 3 | | 5216.680 | 96.101 | 93.120 | N/A | N/A | 2.982 | AV |
| 4 | | 5350.000 | 47.418 | 44.587 | -6.582 | 54.000 | 2.832 | AV |
| 5 | | 5369.840 | 48.701 | 45.805 | -5.299 | 54.000 | 2.896 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz | |

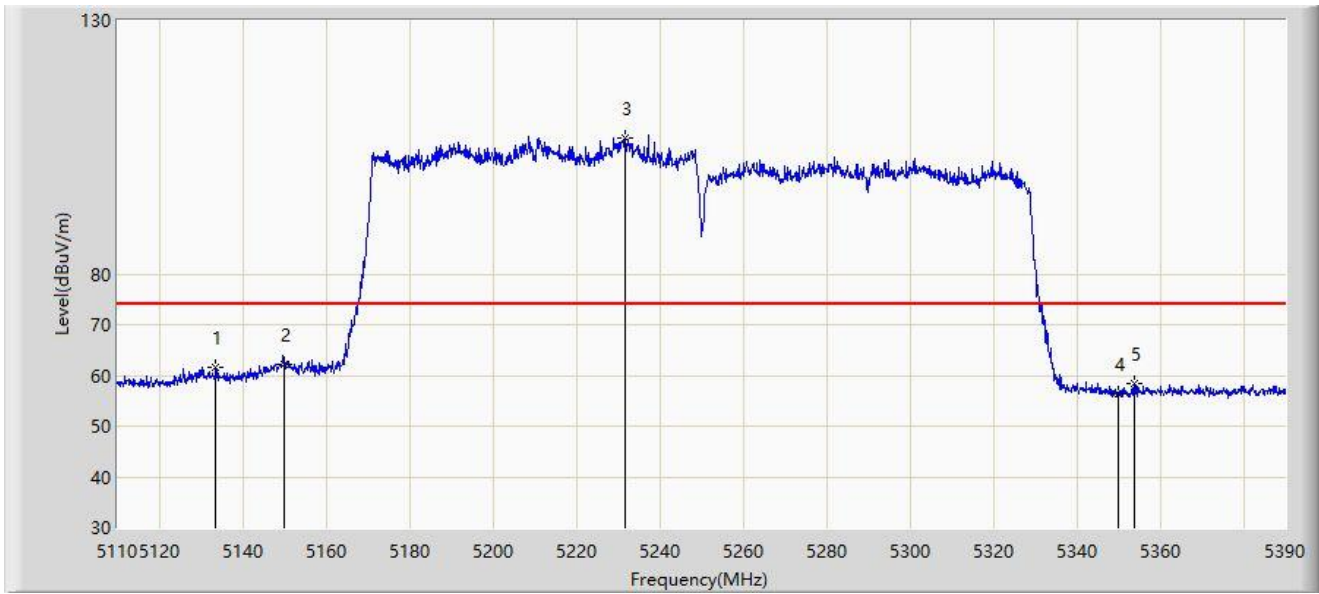


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5133.660 | 61.711 | 58.423 | -12.289 | 74.000 | 3.288 | PK |
| 2 | * | 5150.000 | 62.054 | 58.555 | -11.946 | 74.000 | 3.499 | PK |
| 3 | | 5231.800 | 106.680 | 103.431 | N/A | N/A | 3.249 | PK |
| 4 | | 5350.000 | 56.437 | 53.606 | -17.563 | 74.000 | 2.832 | PK |
| 5 | | 5353.880 | 58.479 | 55.673 | -15.521 | 74.000 | 2.806 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz | |

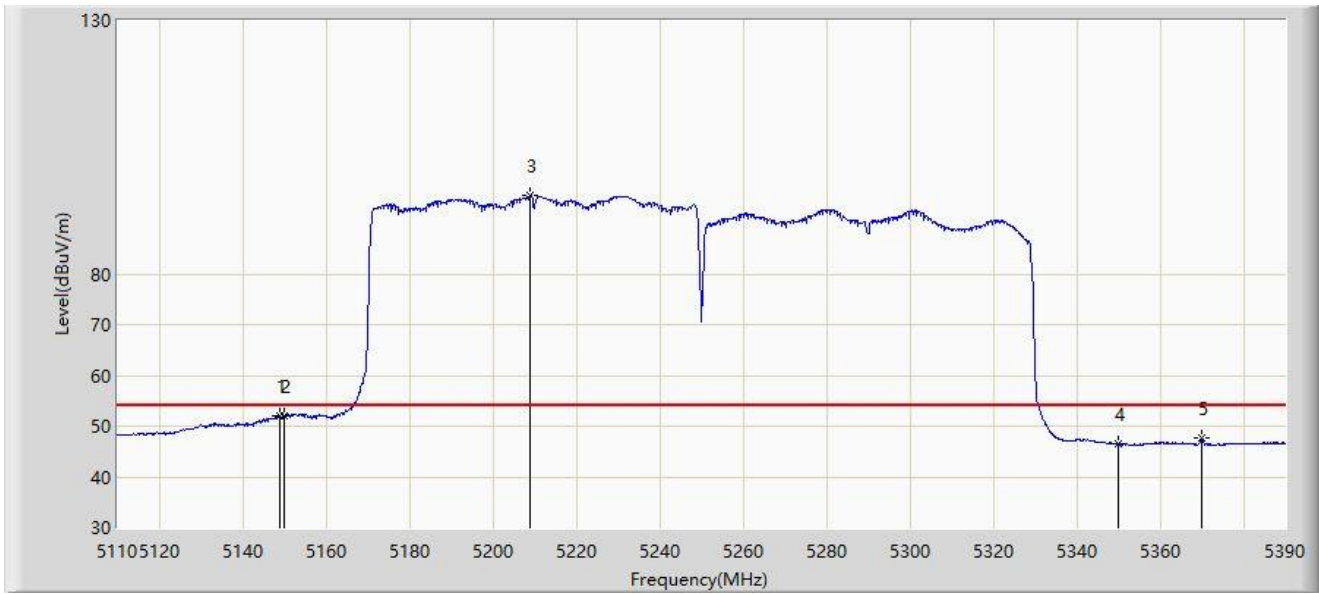


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5148.780 | 51.911 | 48.416 | -2.089 | 54.000 | 3.495 | AV |
| 2 | * | 5150.000 | 52.020 | 48.521 | -1.980 | 54.000 | 3.499 | AV |
| 3 | | 5209.120 | 95.435 | 92.487 | N/A | N/A | 2.948 | AV |
| 4 | | 5350.000 | 46.382 | 43.551 | -7.618 | 54.000 | 2.832 | AV |
| 5 | | 5369.840 | 47.555 | 44.659 | -6.445 | 54.000 | 2.896 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz | |

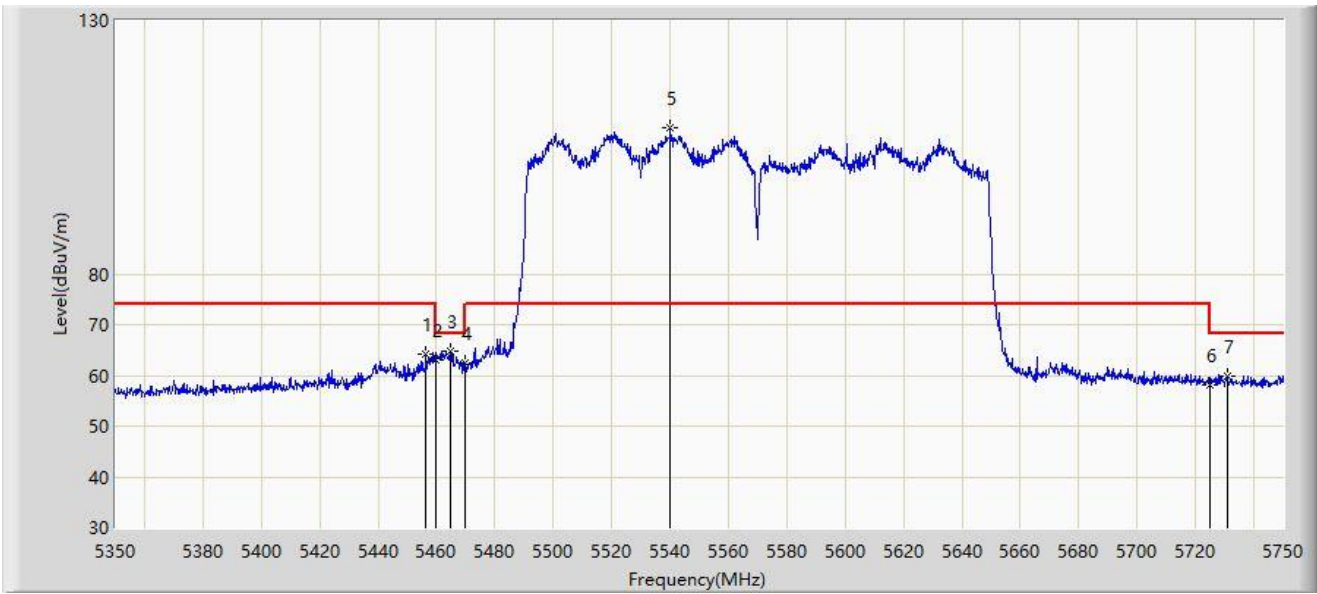


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5456.400 | 64.339 | 61.187 | -9.661 | 74.000 | 3.152 | PK |
| 2 | | 5460.000 | 63.038 | 59.819 | -10.962 | 74.000 | 3.219 | PK |
| 3 | * | 5464.600 | 64.820 | 61.512 | -3.380 | 68.200 | 3.308 | PK |
| 4 | | 5470.000 | 62.355 | 58.943 | -5.845 | 68.200 | 3.411 | PK |
| 5 | | 5540.200 | 108.897 | 105.500 | N/A | N/A | 3.397 | PK |
| 6 | | 5725.000 | 58.127 | 53.439 | -10.073 | 68.200 | 4.688 | PK |
| 7 | | 5730.800 | 59.786 | 55.172 | -8.414 | 68.200 | 4.614 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz | |

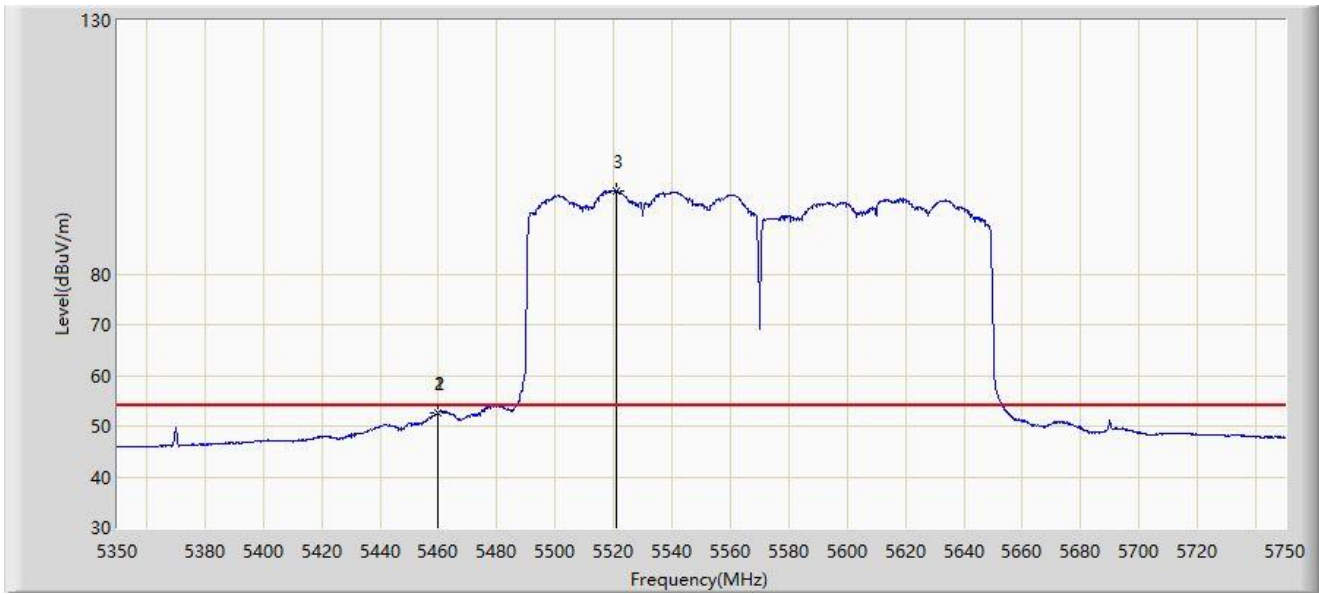


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5459.600 | 52.490 | 49.279 | -1.510 | 54.000 | 3.211 | AV |
| 2 | * | 5460.000 | 52.497 | 49.278 | -1.503 | 54.000 | 3.219 | AV |
| 3 | | 5520.800 | 96.347 | 93.233 | N/A | N/A | 3.114 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz | |

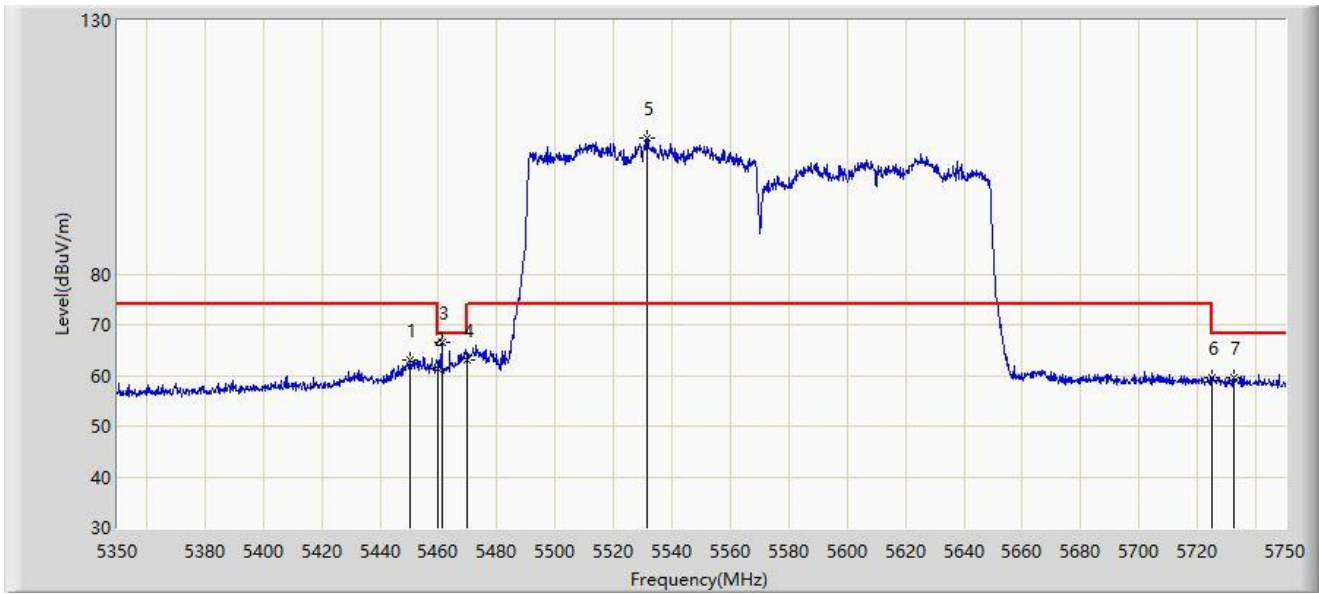


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5450.000 | 63.107 | 59.965 | -10.893 | 74.000 | 3.143 | PK |
| 2 | | 5460.000 | 61.289 | 58.070 | -12.711 | 74.000 | 3.219 | PK |
| 3 | * | 5461.200 | 66.407 | 63.165 | -1.793 | 68.200 | 3.243 | PK |
| 4 | | 5470.000 | 63.046 | 59.634 | -5.154 | 68.200 | 3.411 | PK |
| 5 | | 5531.400 | 106.863 | 103.572 | N/A | N/A | 3.290 | PK |
| 6 | | 5725.000 | 59.522 | 54.834 | -8.678 | 68.200 | 4.688 | PK |
| 7 | | 5732.400 | 59.668 | 55.083 | -8.532 | 68.200 | 4.585 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|--|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz | |

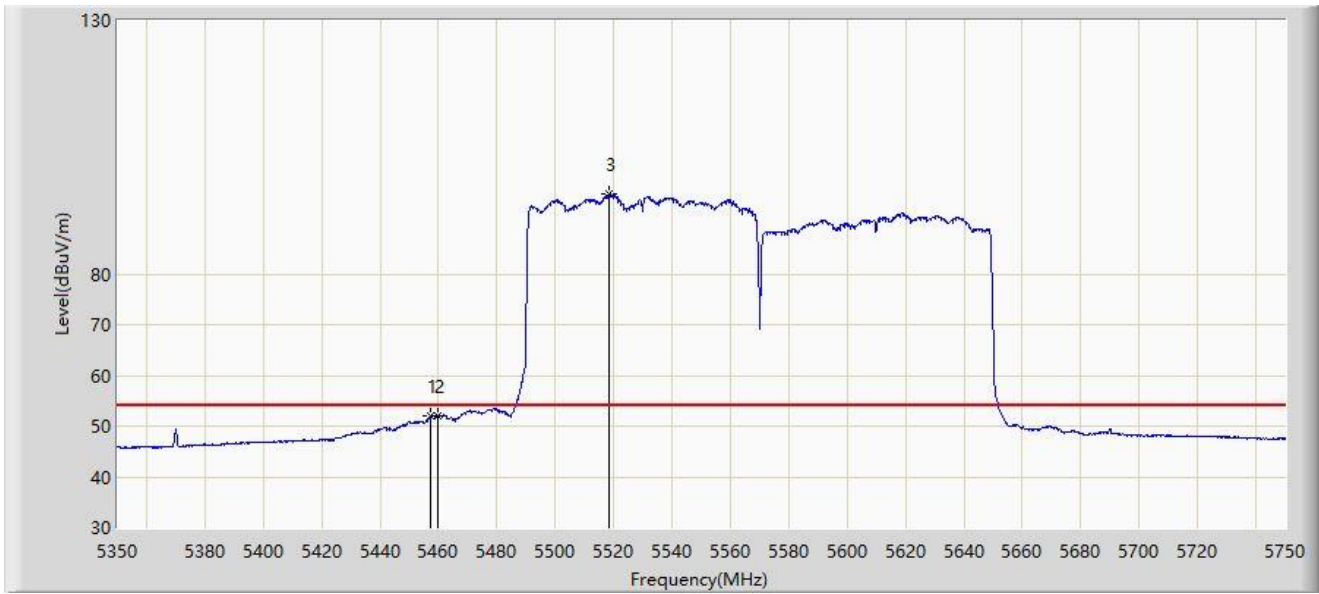


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5457.400 | 51.936 | 48.767 | -2.064 | 54.000 | 3.170 | AV |
| 2 | * | 5460.000 | 52.067 | 48.848 | -1.933 | 54.000 | 3.219 | AV |
| 3 | | 5518.600 | 95.744 | 92.620 | N/A | N/A | 3.124 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz | |

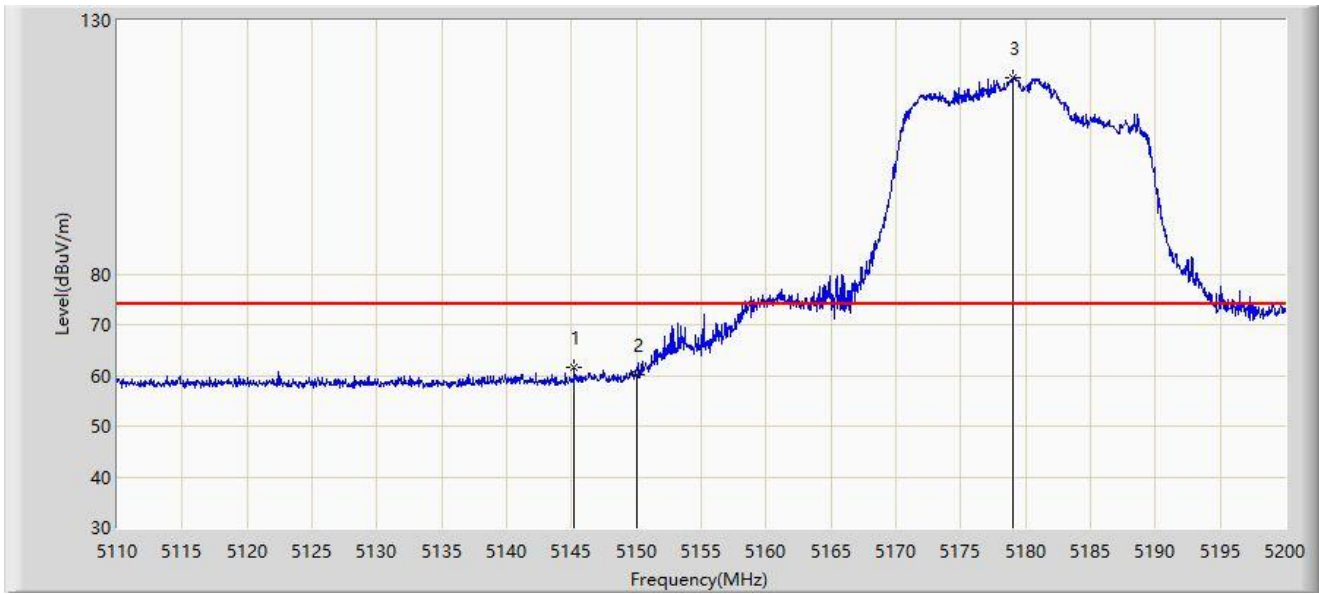


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5145.235 | 61.635 | 58.183 | -12.365 | 74.000 | 3.453 | PK |
| 2 | | 5150.000 | 60.111 | 56.612 | -13.889 | 74.000 | 3.499 | PK |
| 3 | | 5179.075 | 118.680 | 115.348 | N/A | N/A | 3.333 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz | |

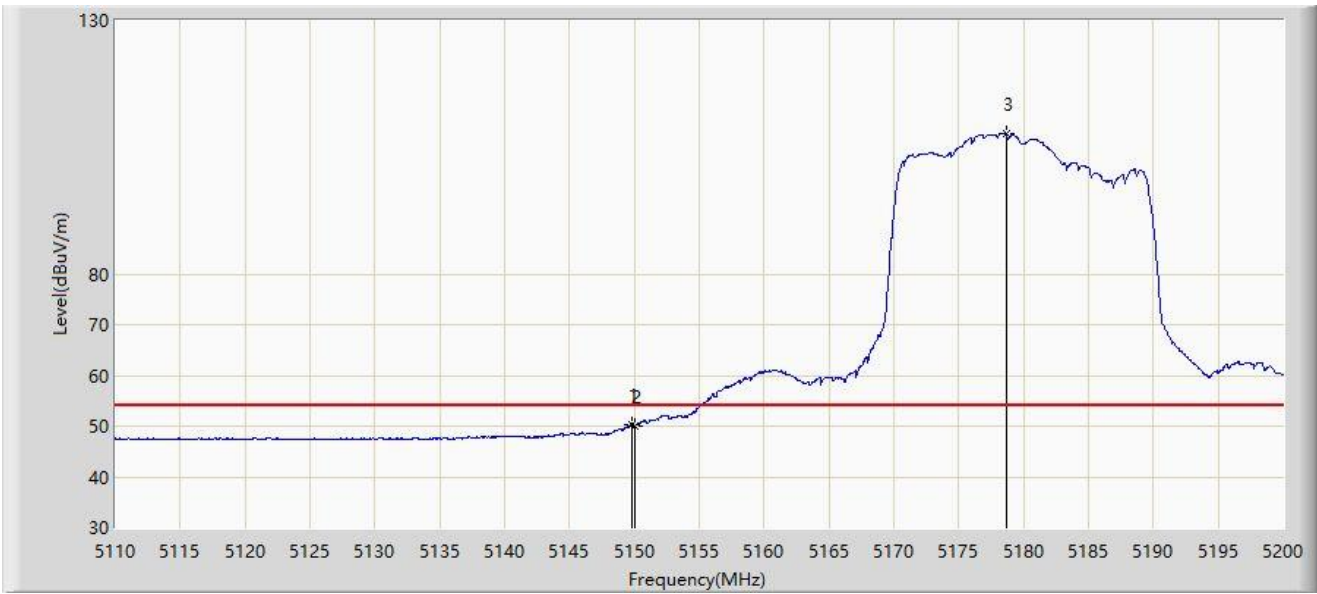


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5149.780 | 50.352 | 46.853 | -3.648 | 54.000 | 3.499 | AV |
| 2 | | 5150.000 | 50.062 | 46.563 | -3.938 | 54.000 | 3.499 | AV |
| 3 | | 5178.670 | 107.815 | 104.475 | N/A | N/A | 3.340 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz | |

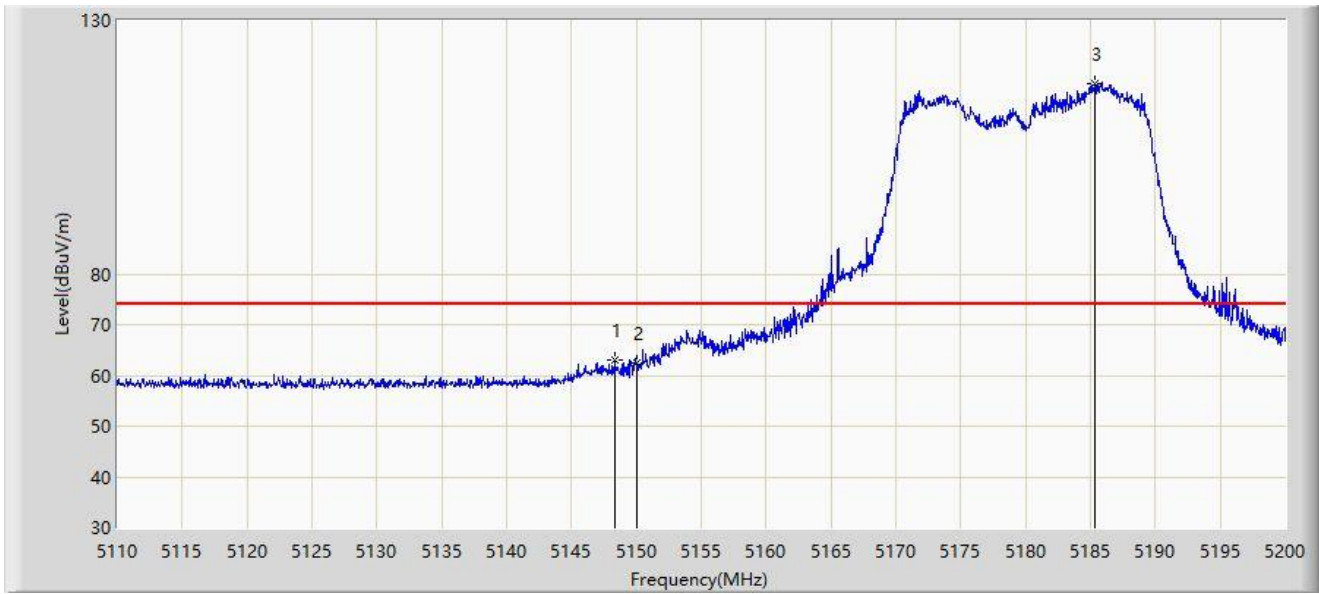


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5148.340 | 63.065 | 59.572 | -10.935 | 74.000 | 3.492 | PK |
| 2 | | 5150.000 | 62.440 | 58.941 | -11.560 | 74.000 | 3.499 | PK |
| 3 | | 5185.330 | 117.450 | 114.248 | N/A | N/A | 3.201 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz | |

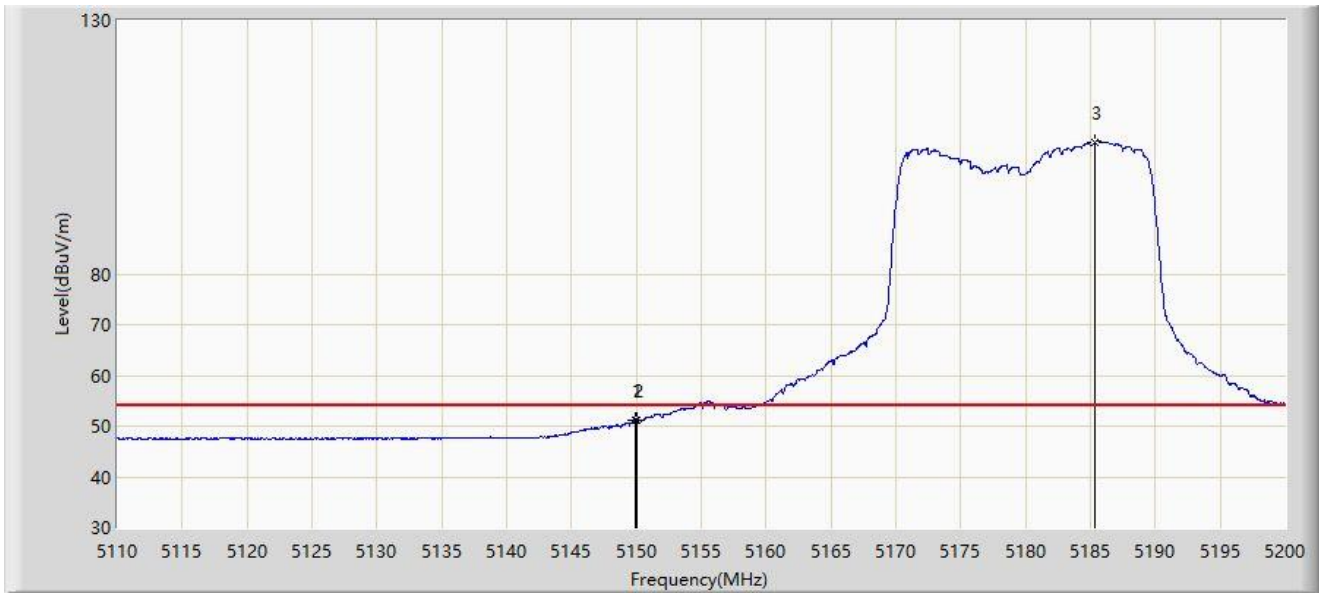


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5149.915 | 51.181 | 47.682 | -2.819 | 54.000 | 3.500 | AV |
| 2 | | 5150.000 | 51.019 | 47.520 | -2.981 | 54.000 | 3.499 | AV |
| 3 | | 5185.330 | 105.938 | 102.736 | N/A | N/A | 3.201 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz | |

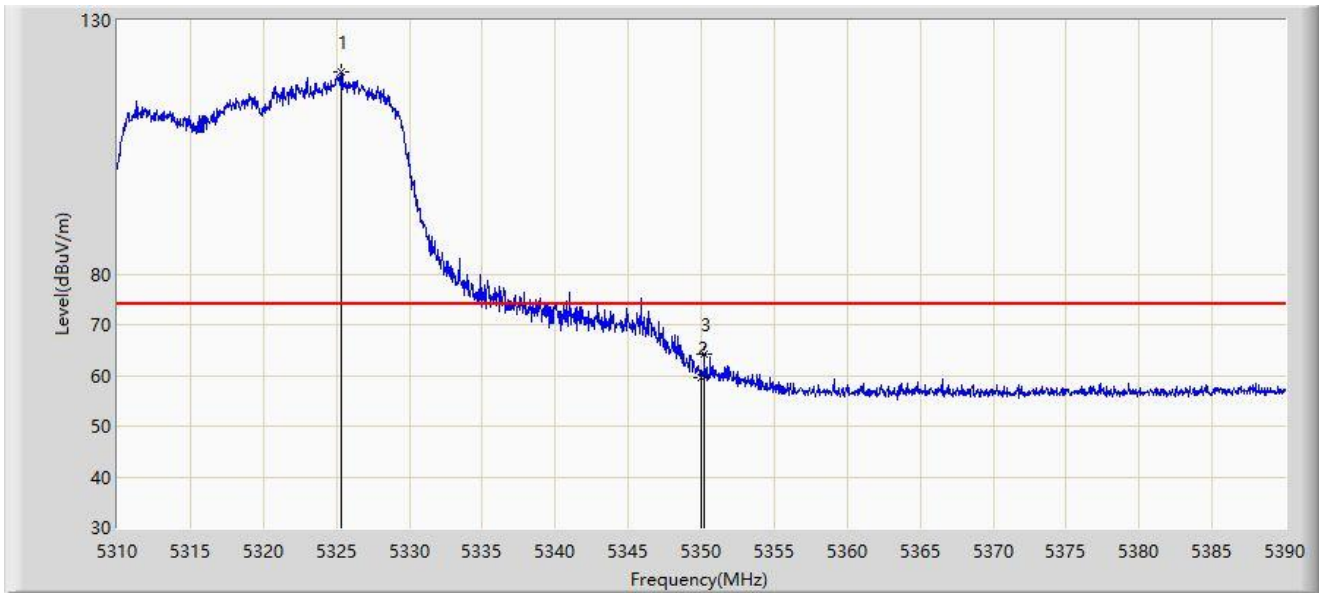


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5325.320 | 119.724 | 116.705 | N/A | N/A | 3.018 | PK |
| 2 | | 5350.000 | 59.496 | 56.665 | -14.504 | 74.000 | 2.832 | PK |
| 3 | * | 5350.200 | 64.336 | 61.508 | -9.664 | 74.000 | 2.828 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz | |

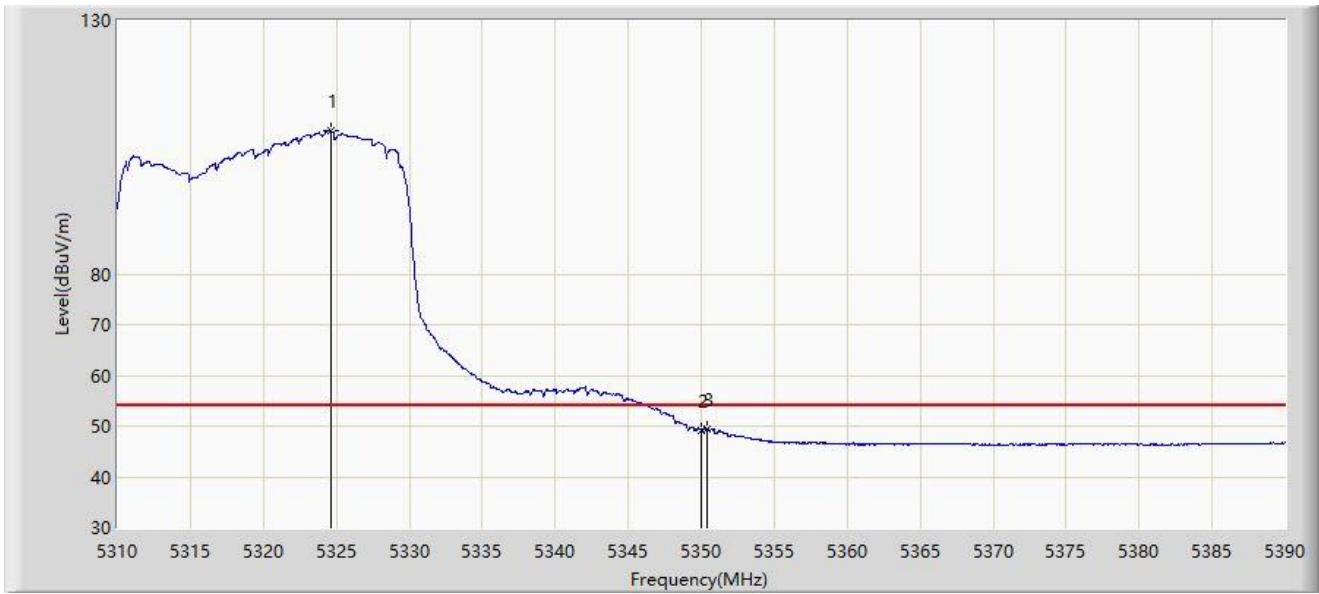


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5324.640 | 108.117 | 105.097 | N/A | N/A | 3.021 | AV |
| 2 | | 5350.000 | 49.252 | 46.421 | -4.748 | 54.000 | 2.832 | AV |
| 3 | * | 5350.400 | 49.548 | 46.723 | -4.452 | 54.000 | 2.825 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz | |

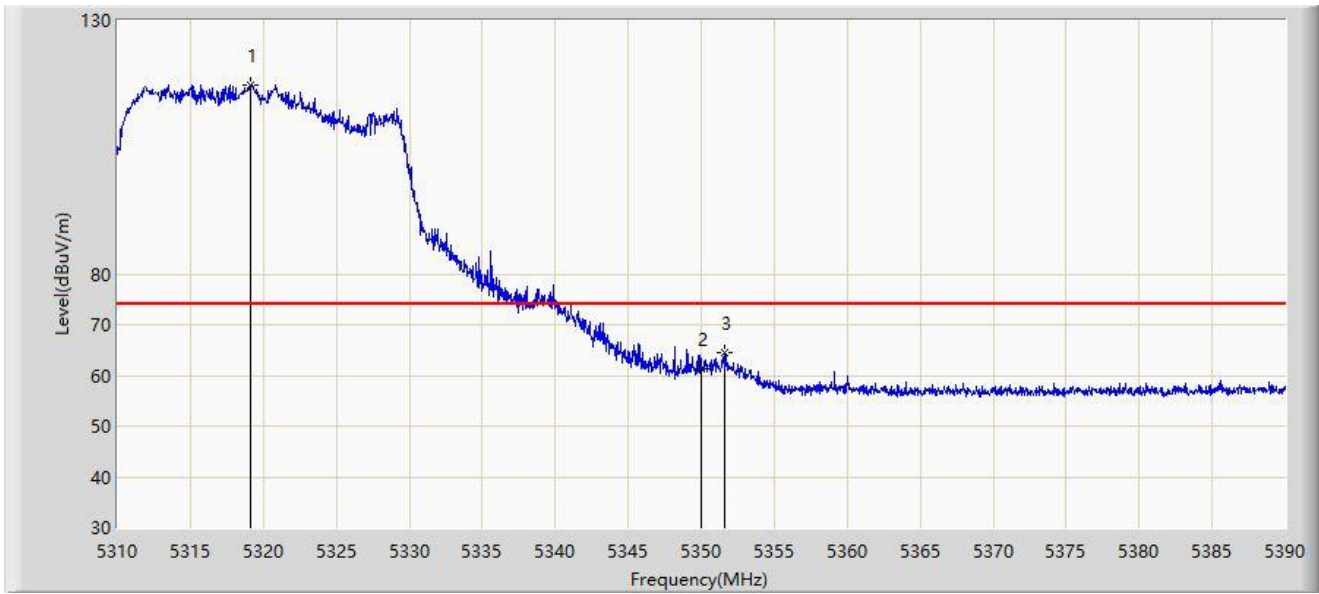


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5319.080 | 117.151 | 114.120 | N/A | N/A | 3.031 | PK |
| 2 | | 5350.000 | 61.447 | 58.616 | -12.553 | 74.000 | 2.832 | PK |
| 3 | * | 5351.600 | 64.465 | 61.661 | -9.535 | 74.000 | 2.805 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz | |

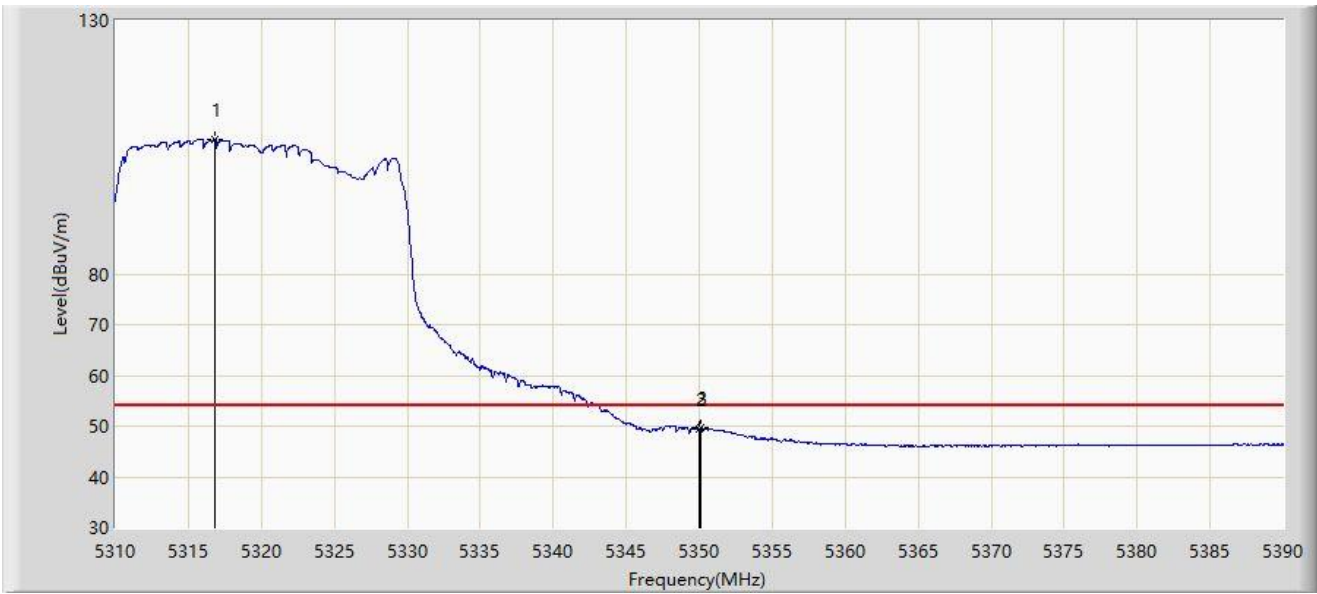


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5316.800 | 106.491 | 103.478 | N/A | N/A | 3.012 | AV |
| 2 | | 5350.000 | 49.492 | 46.661 | -4.508 | 54.000 | 2.832 | AV |
| 3 | * | 5350.120 | 49.733 | 46.904 | -4.267 | 54.000 | 2.830 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz | |

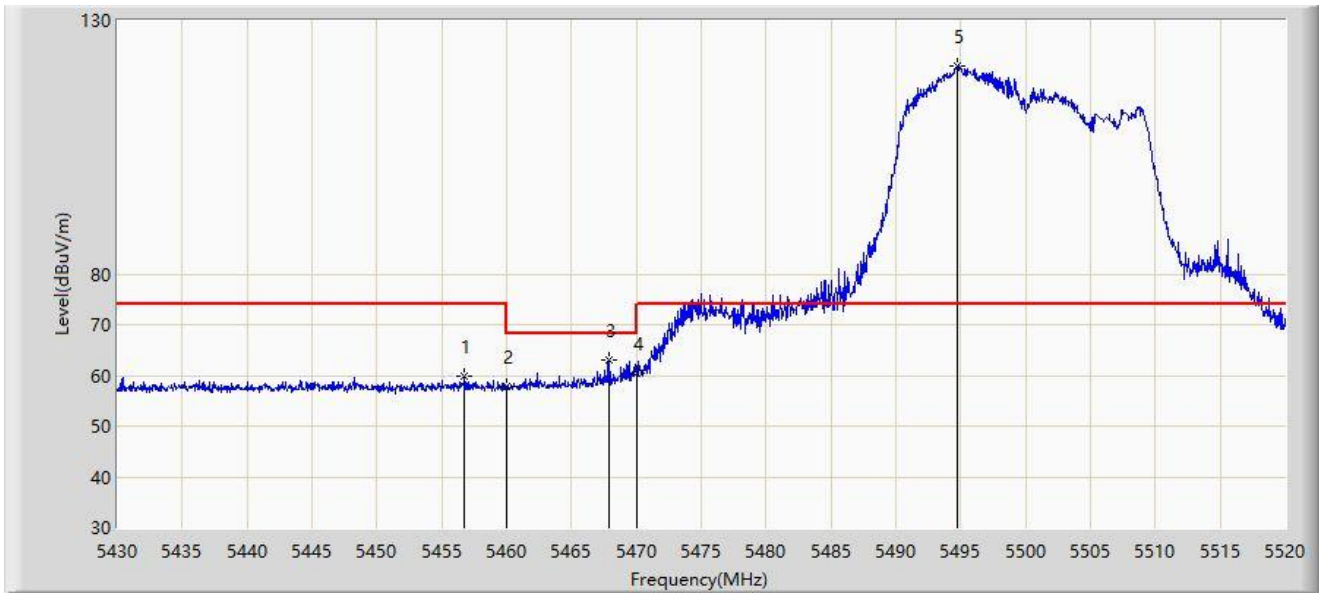


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5456.730 | 59.954 | 56.797 | -14.046 | 74.000 | 3.156 | PK |
| 2 | | 5460.000 | 57.725 | 54.506 | -16.275 | 74.000 | 3.219 | PK |
| 3 | * | 5467.935 | 63.109 | 59.737 | -5.091 | 68.200 | 3.372 | PK |
| 4 | | 5470.000 | 60.339 | 56.927 | -7.861 | 68.200 | 3.411 | PK |
| 5 | | 5494.710 | 120.933 | 117.640 | N/A | N/A | 3.293 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz | |

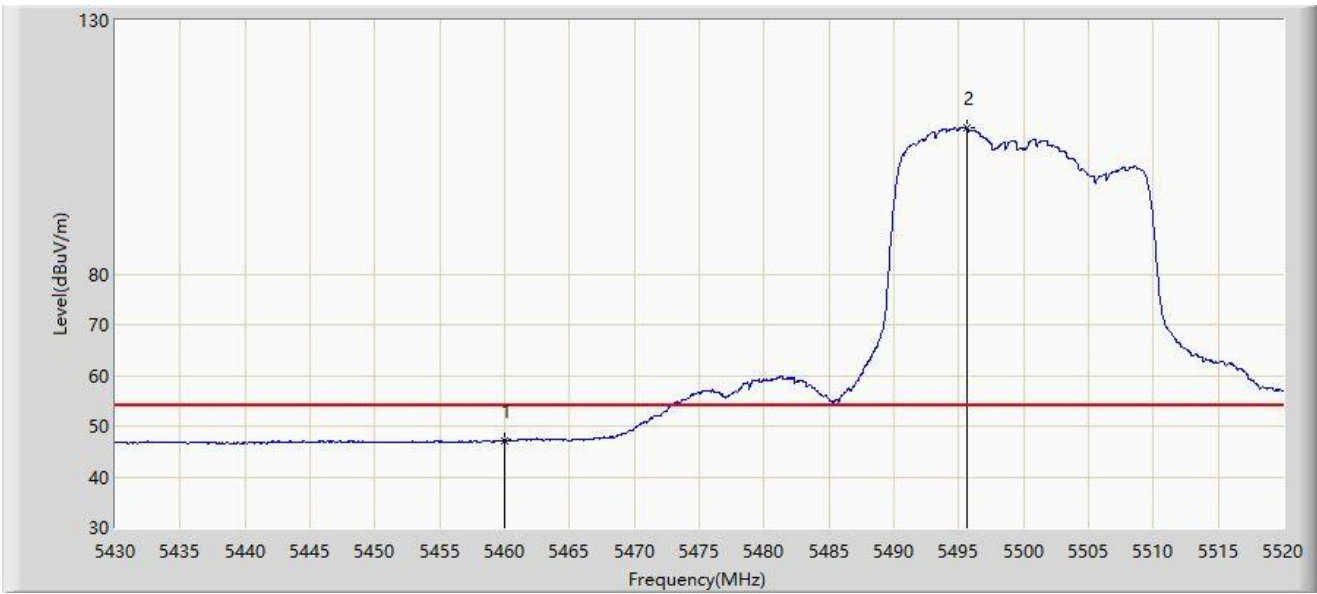


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5460.000 | 47.220 | 44.001 | -6.780 | 54.000 | 3.219 | AV |
| 2 | | 5495.610 | 108.811 | 105.525 | N/A | N/A | 3.287 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz | |

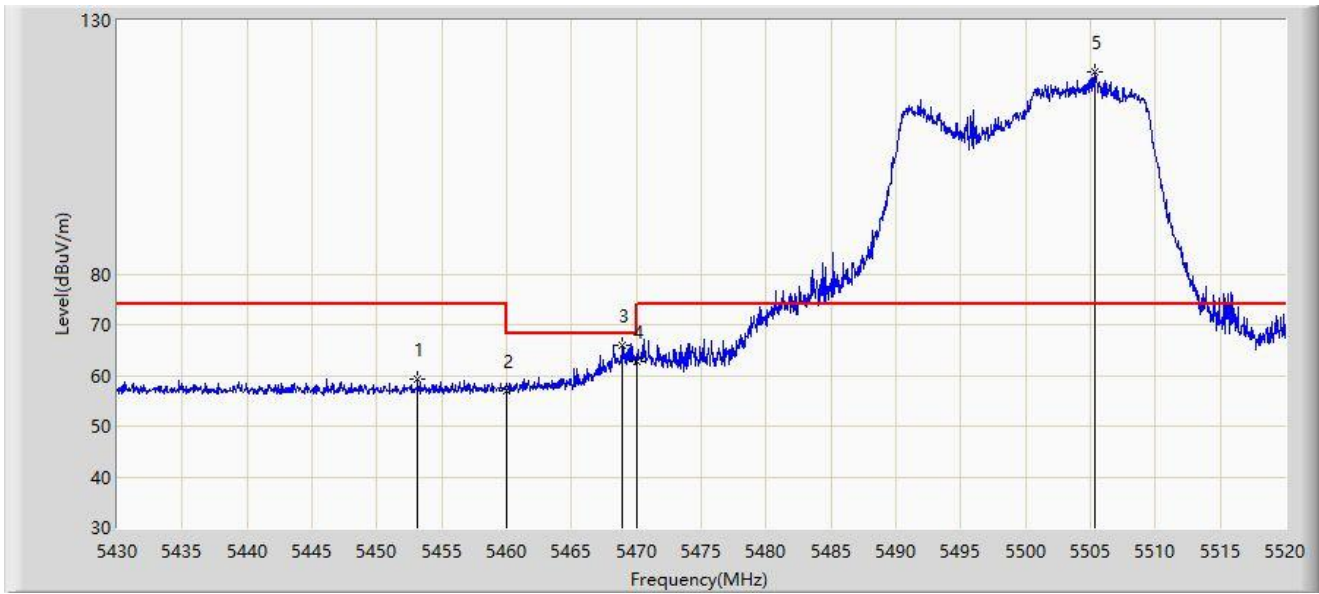


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5453.175 | 59.241 | 56.121 | -14.759 | 74.000 | 3.120 | PK |
| 2 | | 5460.000 | 57.067 | 53.848 | -16.933 | 74.000 | 3.219 | PK |
| 3 | * | 5468.925 | 66.015 | 62.624 | -2.185 | 68.200 | 3.391 | PK |
| 4 | | 5470.000 | 62.833 | 59.421 | -5.367 | 68.200 | 3.411 | PK |
| 5 | | 5505.330 | 119.826 | 116.609 | N/A | N/A | 3.217 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz | |

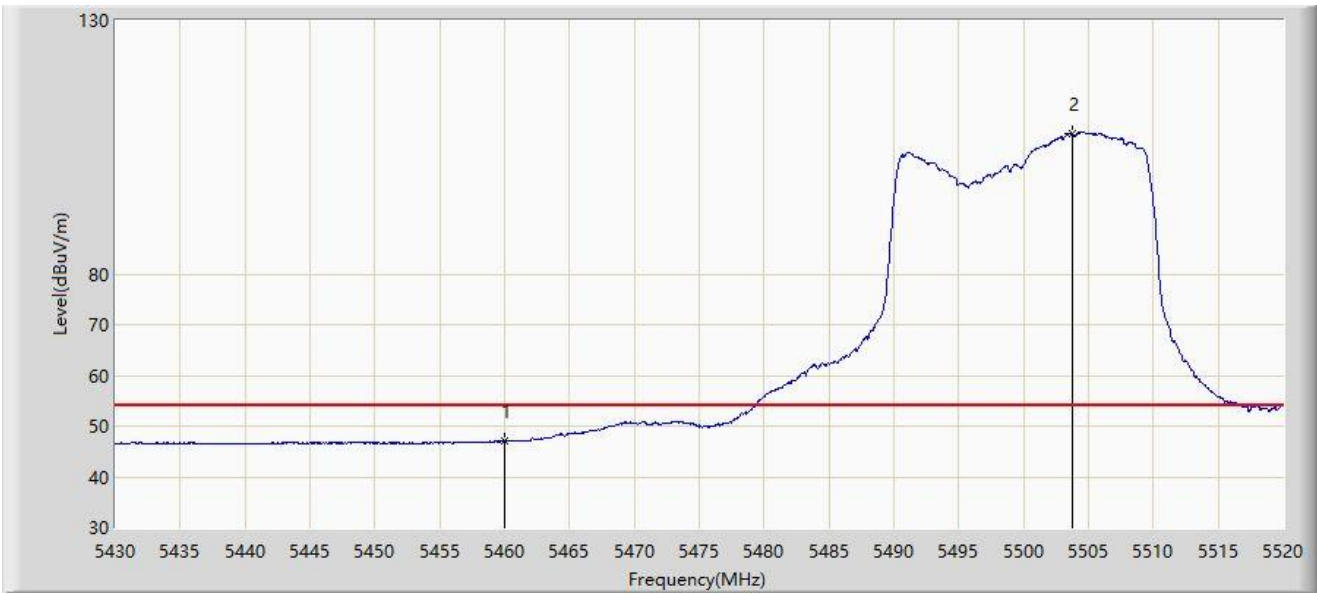


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5460.000 | 47.031 | 43.812 | -6.969 | 54.000 | 3.219 | AV |
| 2 | | 5503.800 | 107.796 | 104.567 | N/A | N/A | 3.229 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5700MHz | |

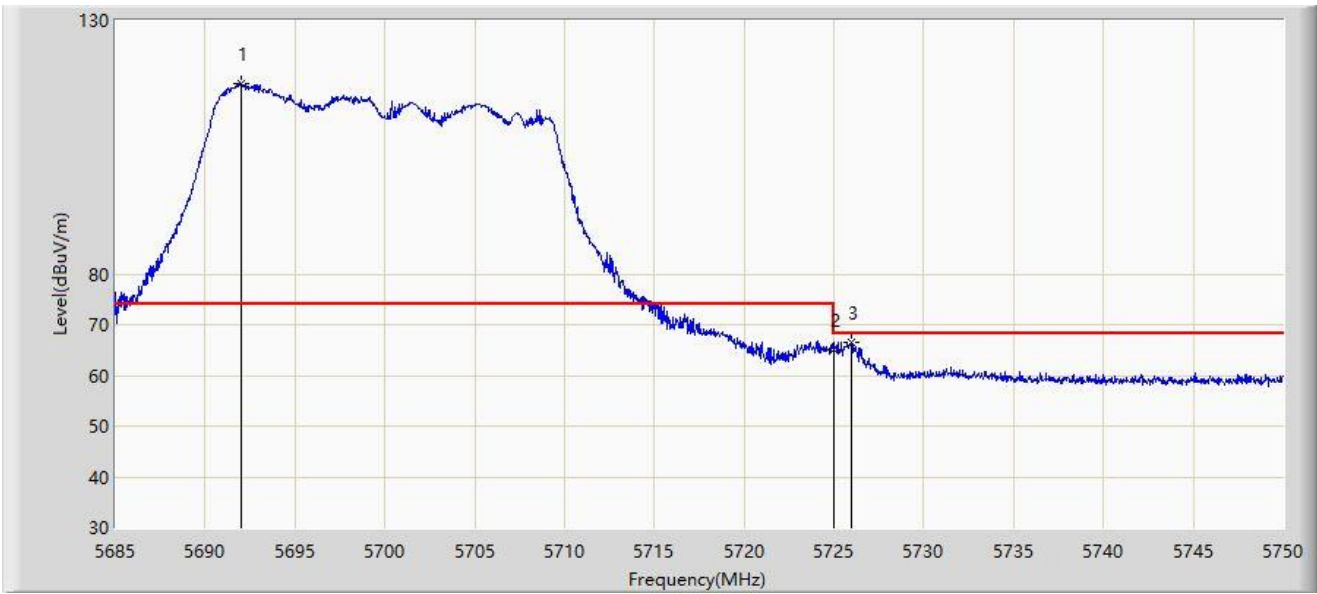


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5691.987 | 117.460 | 113.147 | N/A | N/A | 4.313 | PK |
| 2 | | 5725.000 | 65.061 | 60.373 | -3.139 | 68.200 | 4.688 | PK |
| 3 | * | 5725.950 | 66.448 | 61.752 | -1.752 | 68.200 | 4.696 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5700MHz | |

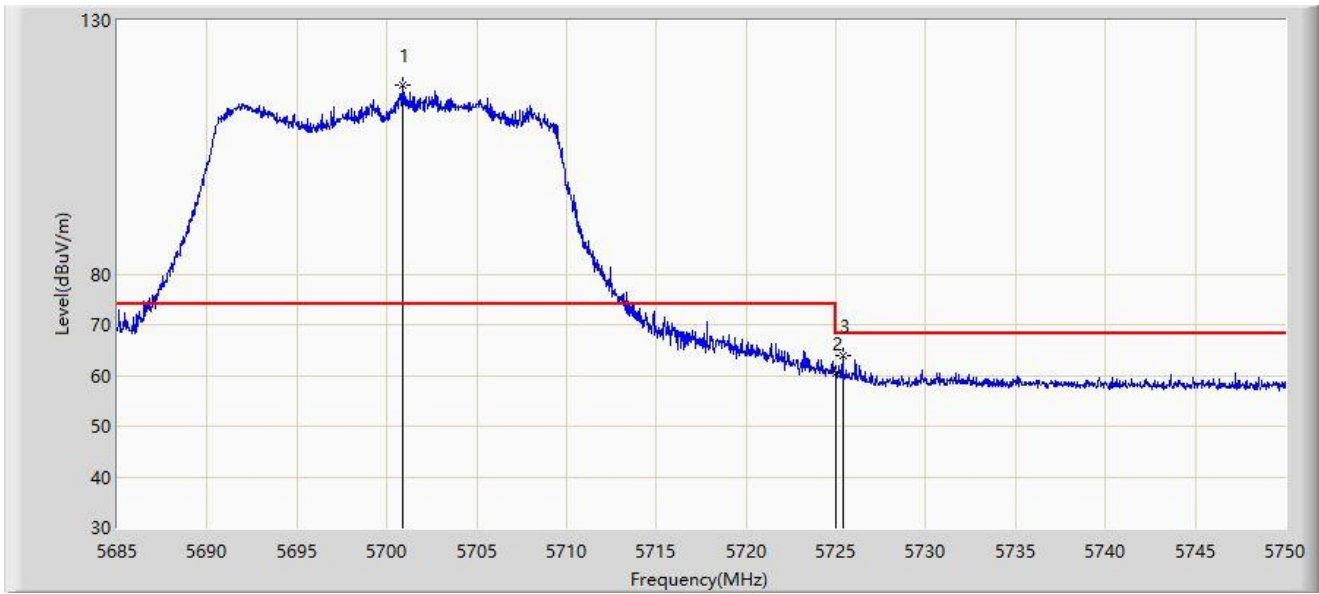


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5700.860 | 117.230 | 112.787 | N/A | N/A | 4.443 | PK |
| 2 | | 5725.000 | 60.488 | 55.800 | -7.712 | 68.200 | 4.688 | PK |
| 3 | * | 5725.365 | 63.985 | 59.294 | -4.215 | 68.200 | 4.692 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5745MHz | |

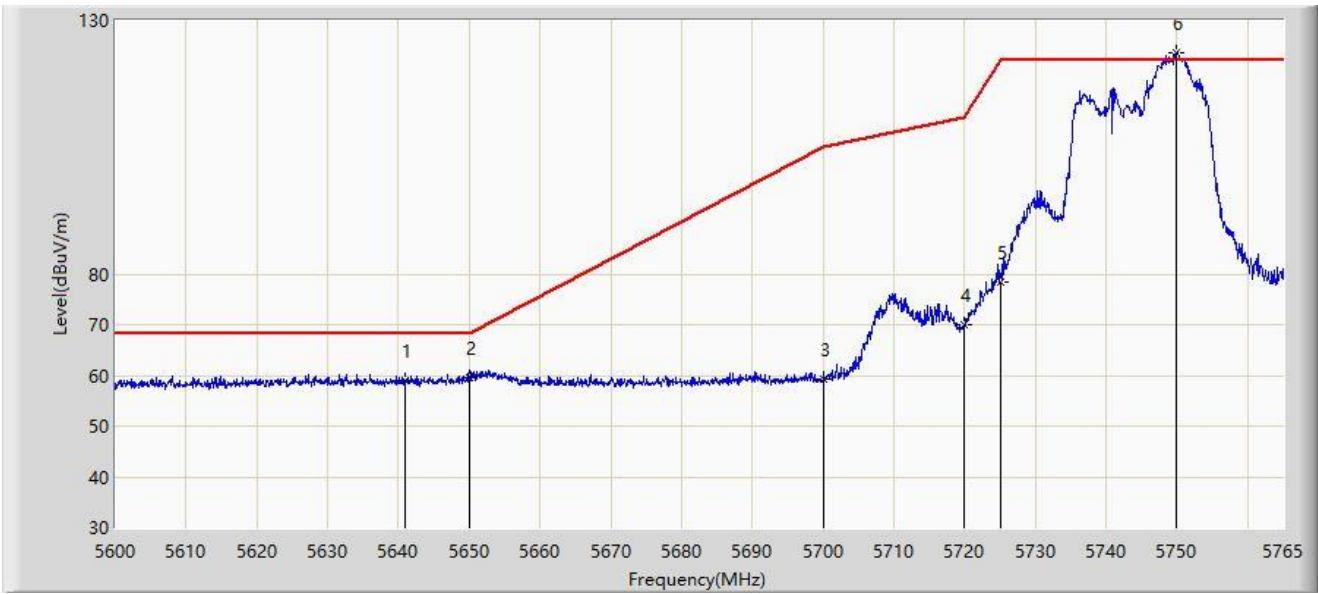


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5640.920 | 59.057 | 54.847 | -9.143 | 68.200 | 4.210 | PK |
| 2 | * | 5650.000 | 59.596 | 55.436 | -8.604 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 59.352 | 54.922 | -45.848 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 69.898 | 65.248 | -40.902 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 78.307 | 73.619 | -43.893 | 122.200 | 4.688 | PK |
| 6 | | 5749.820 | 123.725 | 119.266 | N/A | N/A | 4.459 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5745MHz | |

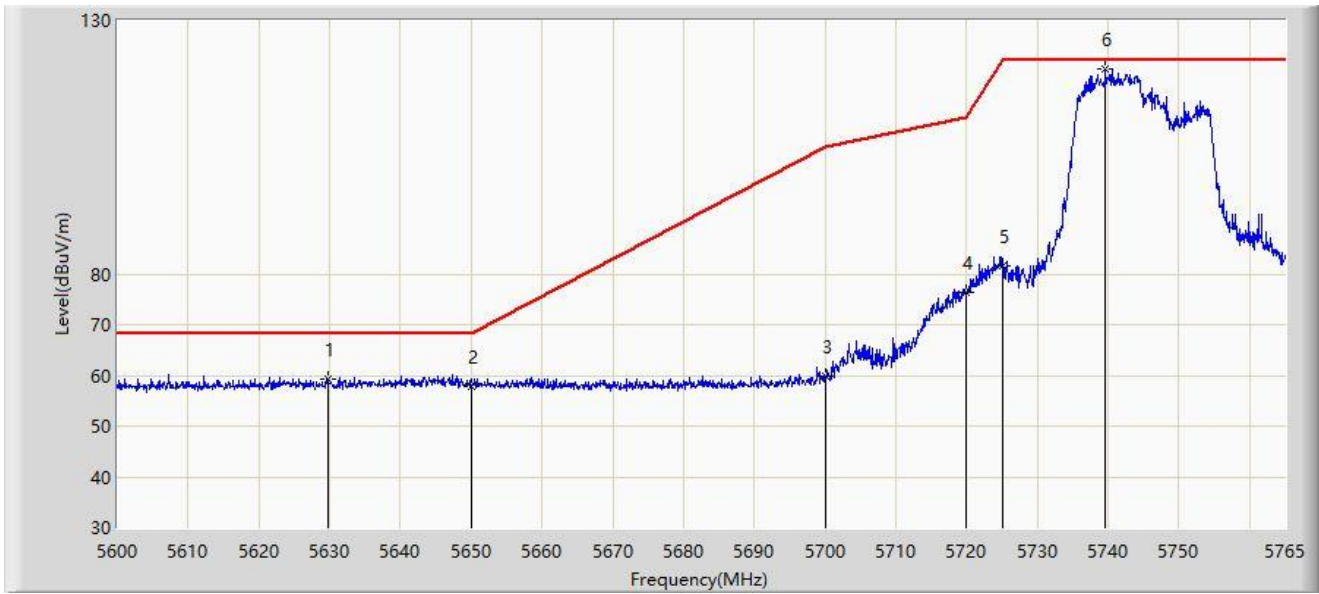


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5629.700 | 59.361 | 55.288 | -8.839 | 68.200 | 4.073 | PK |
| 2 | | 5650.000 | 57.701 | 53.541 | -10.499 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 59.750 | 55.320 | -45.450 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 76.380 | 71.730 | -34.420 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 81.670 | 76.982 | -40.530 | 122.200 | 4.688 | PK |
| 6 | | 5739.590 | 120.307 | 115.851 | N/A | N/A | 4.456 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5825MHz | |

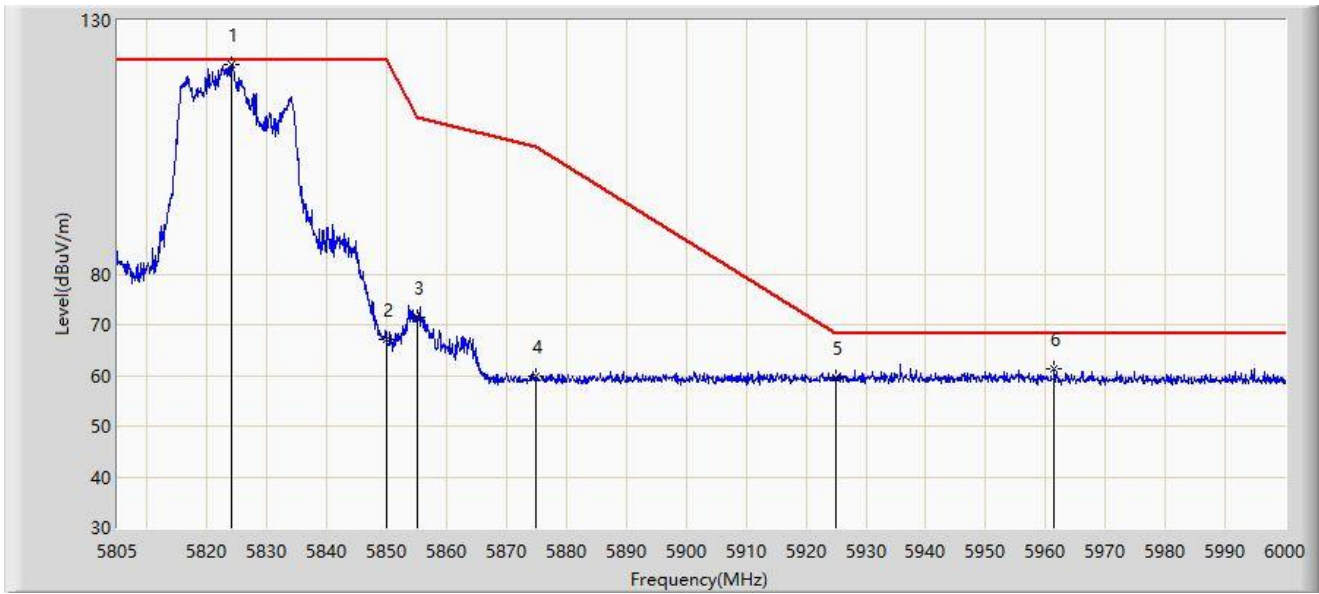


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5824.013 | 121.444 | 116.587 | N/A | N/A | 4.857 | PK |
| 2 | | 5850.000 | 67.071 | 62.111 | -55.129 | 122.200 | 4.960 | PK |
| 3 | | 5855.000 | 71.476 | 66.457 | -39.324 | 110.800 | 5.019 | PK |
| 4 | | 5875.000 | 59.715 | 54.579 | -45.485 | 105.200 | 5.136 | PK |
| 5 | | 5925.000 | 59.623 | 54.353 | -8.577 | 68.200 | 5.271 | PK |
| 6 | * | 5961.487 | 61.369 | 55.964 | -6.831 | 68.200 | 5.405 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-03 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 5825MHz | |

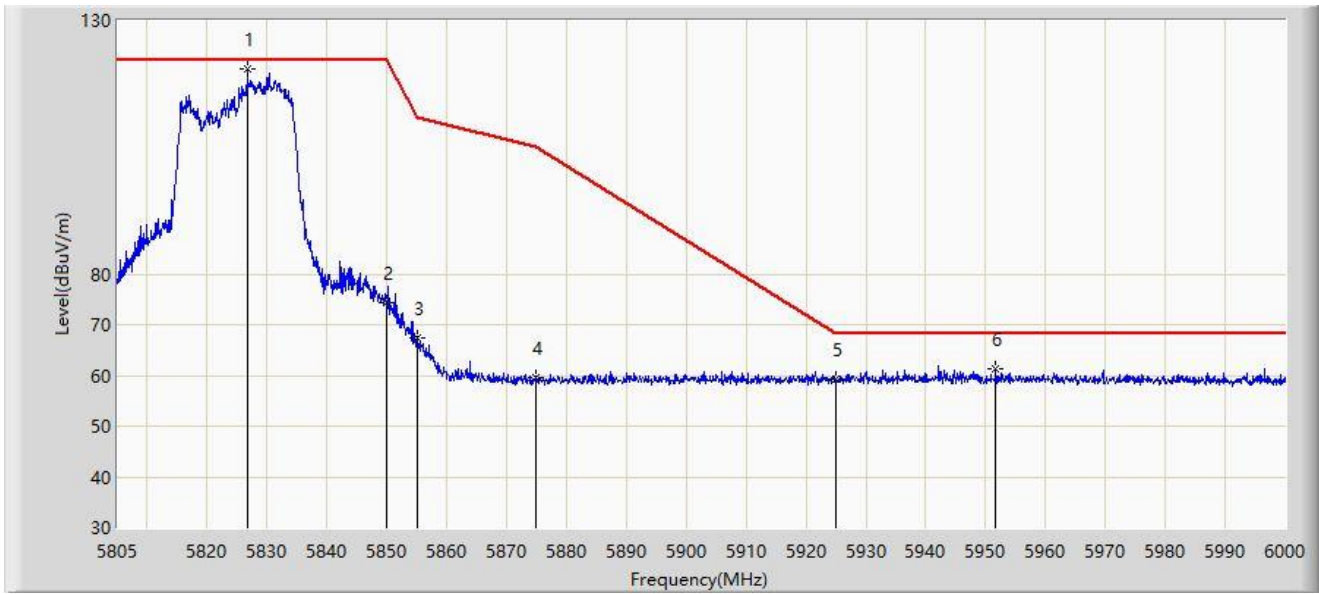


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5826.743 | 120.297 | 115.472 | N/A | N/A | 4.825 | PK |
| 2 | | 5850.000 | 74.312 | 69.352 | -47.888 | 122.200 | 4.960 | PK |
| 3 | | 5855.000 | 67.373 | 62.354 | -43.427 | 110.800 | 5.019 | PK |
| 4 | | 5875.000 | 59.489 | 54.353 | -45.711 | 105.200 | 5.136 | PK |
| 5 | | 5925.000 | 59.236 | 53.966 | -8.964 | 68.200 | 5.271 | PK |
| 6 | * | 5951.737 | 61.196 | 55.804 | -7.004 | 68.200 | 5.391 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz | |

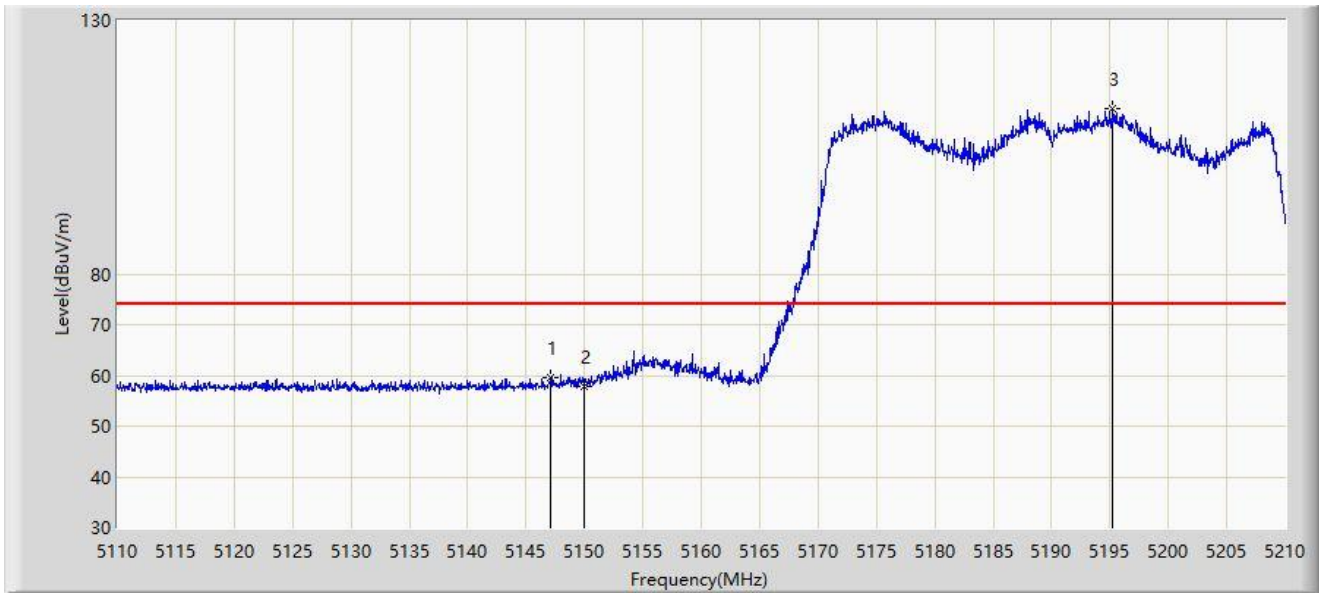


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5147.100 | 59.691 | 56.212 | -14.309 | 74.000 | 3.479 | PK |
| 2 | | 5150.000 | 57.808 | 54.309 | -16.192 | 74.000 | 3.499 | PK |
| 3 | | 5195.250 | 112.527 | 109.535 | N/A | N/A | 2.992 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz | |

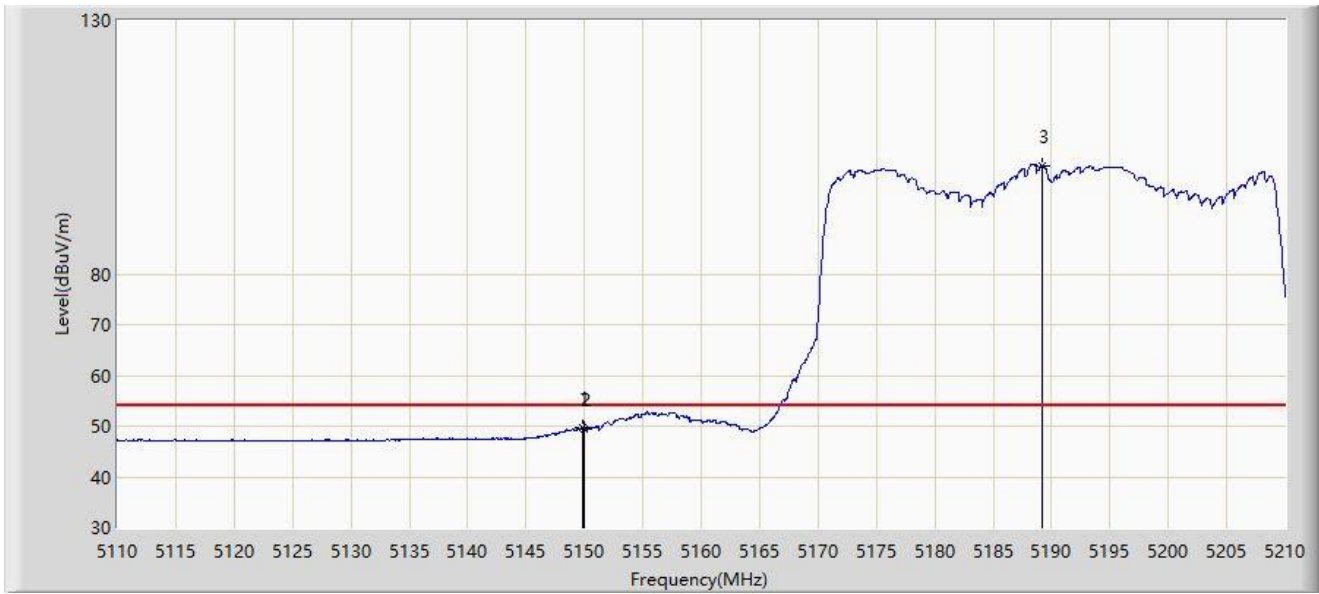


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5149.900 | 49.779 | 46.280 | -4.221 | 54.000 | 3.500 | AV |
| 2 | | 5150.000 | 49.415 | 45.916 | -4.585 | 54.000 | 3.499 | AV |
| 3 | | 5189.250 | 101.368 | 98.251 | N/A | N/A | 3.117 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz | |

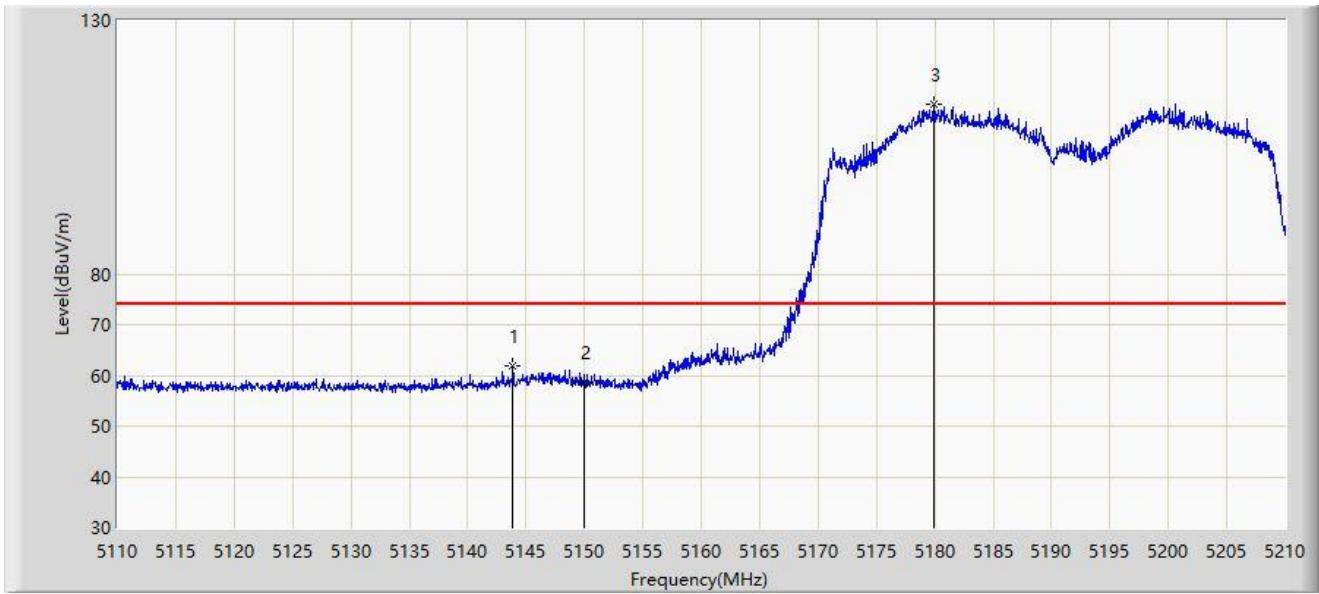


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5143.850 | 61.904 | 58.471 | -12.096 | 74.000 | 3.433 | PK |
| 2 | | 5150.000 | 58.640 | 55.141 | -15.360 | 74.000 | 3.499 | PK |
| 3 | | 5179.950 | 113.575 | 110.260 | N/A | N/A | 3.315 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz | |

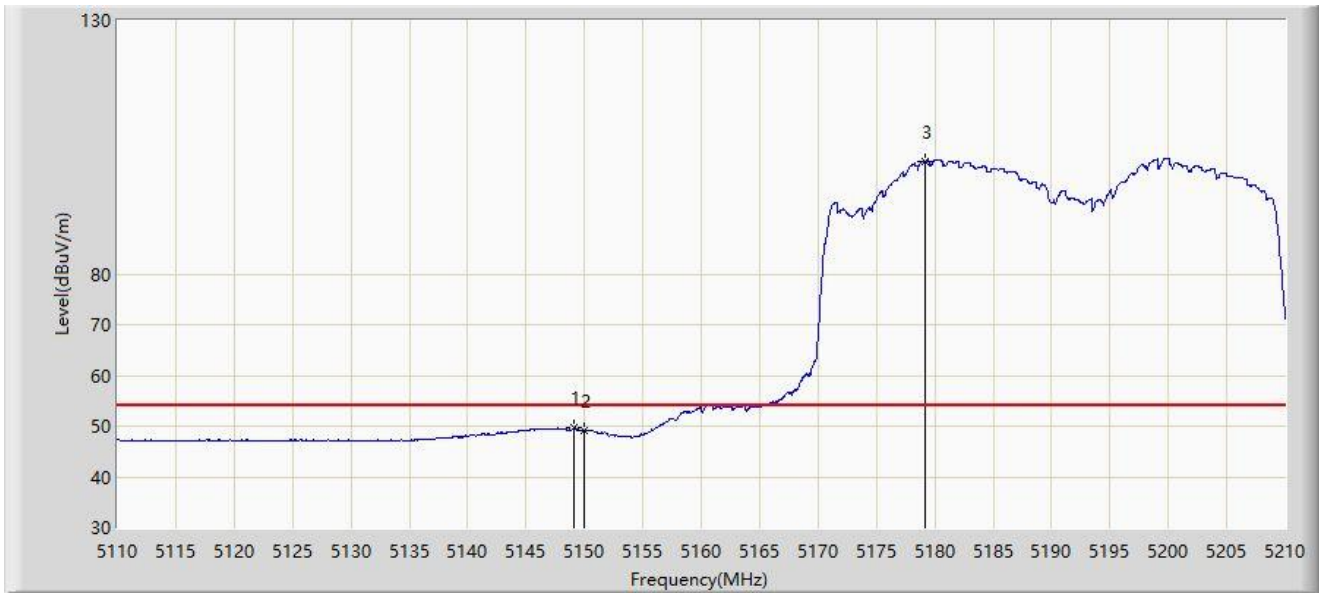


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5149.100 | 49.735 | 46.239 | -4.265 | 54.000 | 3.495 | AV |
| 2 | | 5150.000 | 49.254 | 45.755 | -4.746 | 54.000 | 3.499 | AV |
| 3 | | 5179.150 | 102.217 | 98.887 | N/A | N/A | 3.330 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz | |

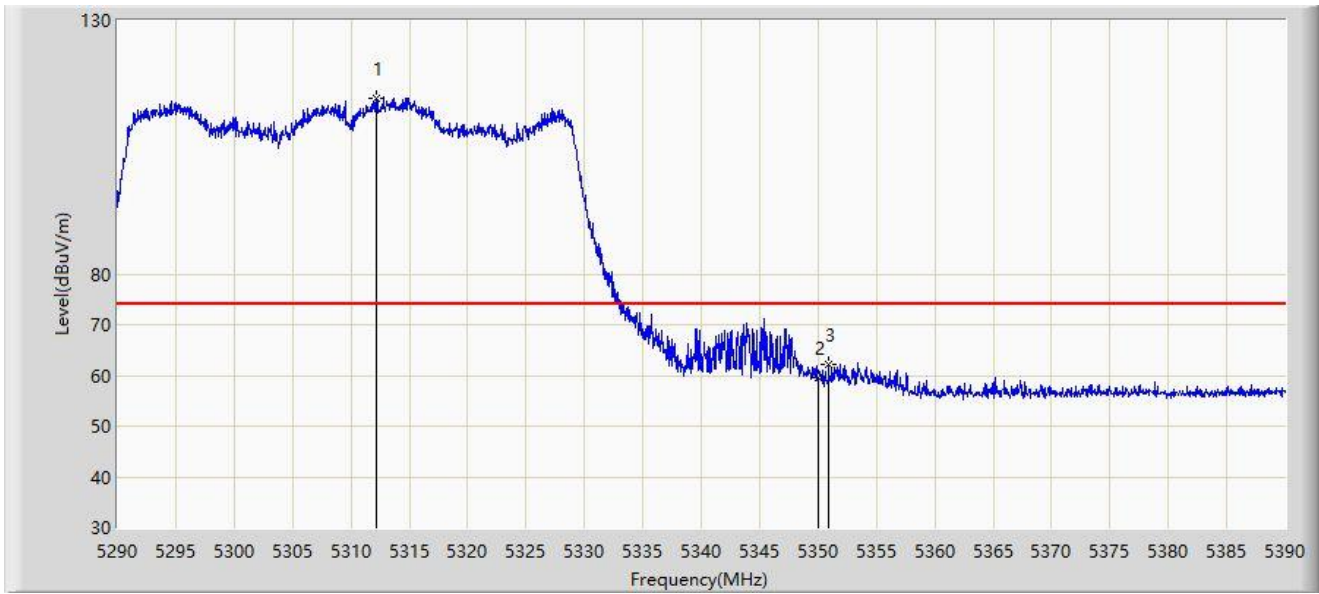


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5312.150 | 114.674 | 111.739 | N/A | N/A | 2.935 | PK |
| 2 | | 5350.000 | 59.540 | 56.709 | -14.460 | 74.000 | 2.832 | PK |
| 3 | * | 5350.900 | 62.169 | 59.353 | -11.831 | 74.000 | 2.816 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz | |

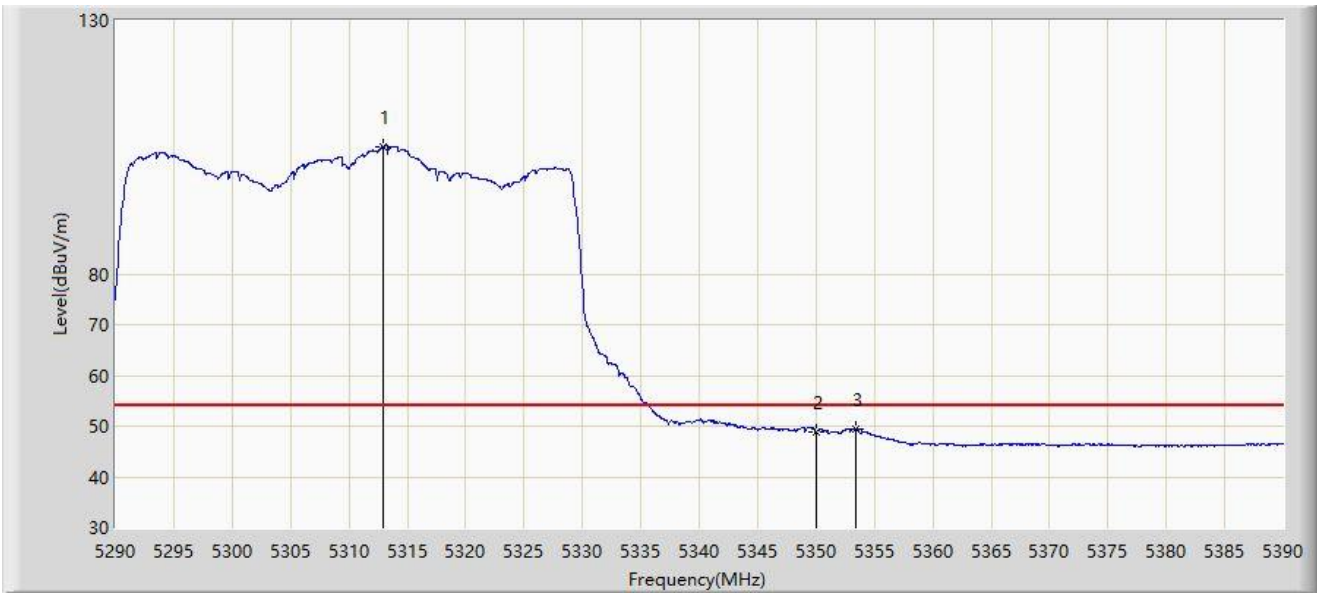


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5312.900 | 105.077 | 102.131 | N/A | N/A | 2.946 | AV |
| 2 | | 5350.000 | 48.785 | 45.954 | -5.215 | 54.000 | 2.832 | AV |
| 3 | * | 5353.450 | 49.419 | 46.615 | -4.581 | 54.000 | 2.804 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz | |

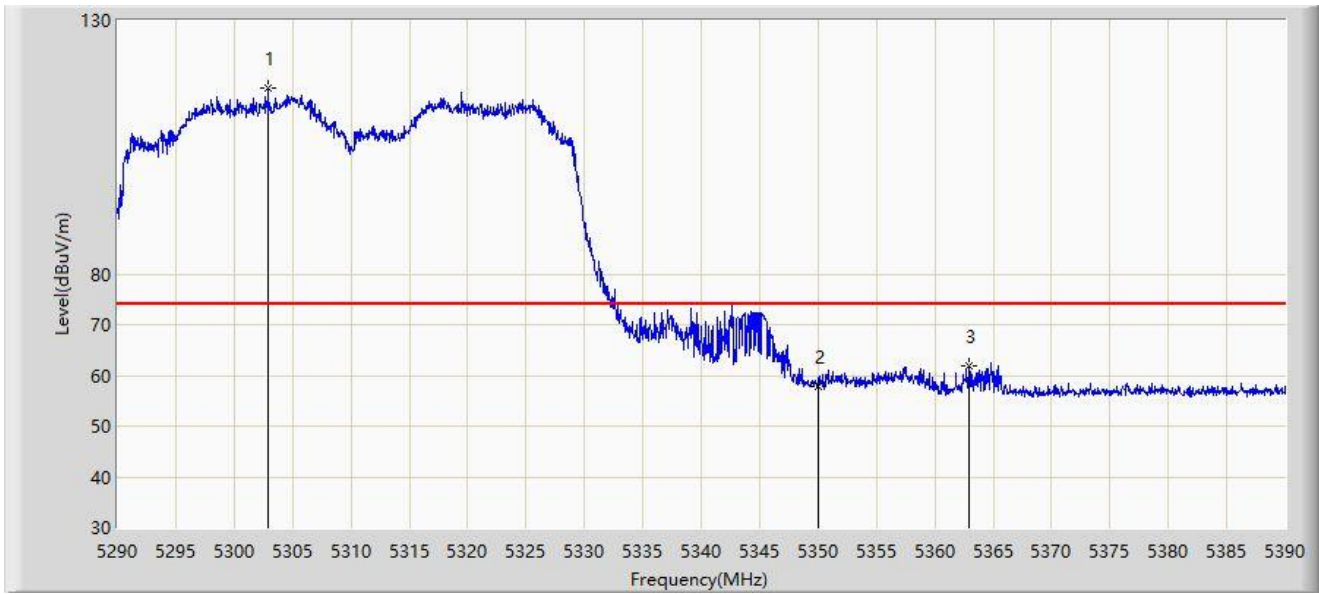


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5302.900 | 116.591 | 113.796 | N/A | N/A | 2.795 | PK |
| 2 | | 5350.000 | 57.780 | 54.949 | -16.220 | 74.000 | 2.832 | PK |
| 3 | * | 5362.950 | 61.997 | 59.146 | -12.003 | 74.000 | 2.851 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz | |

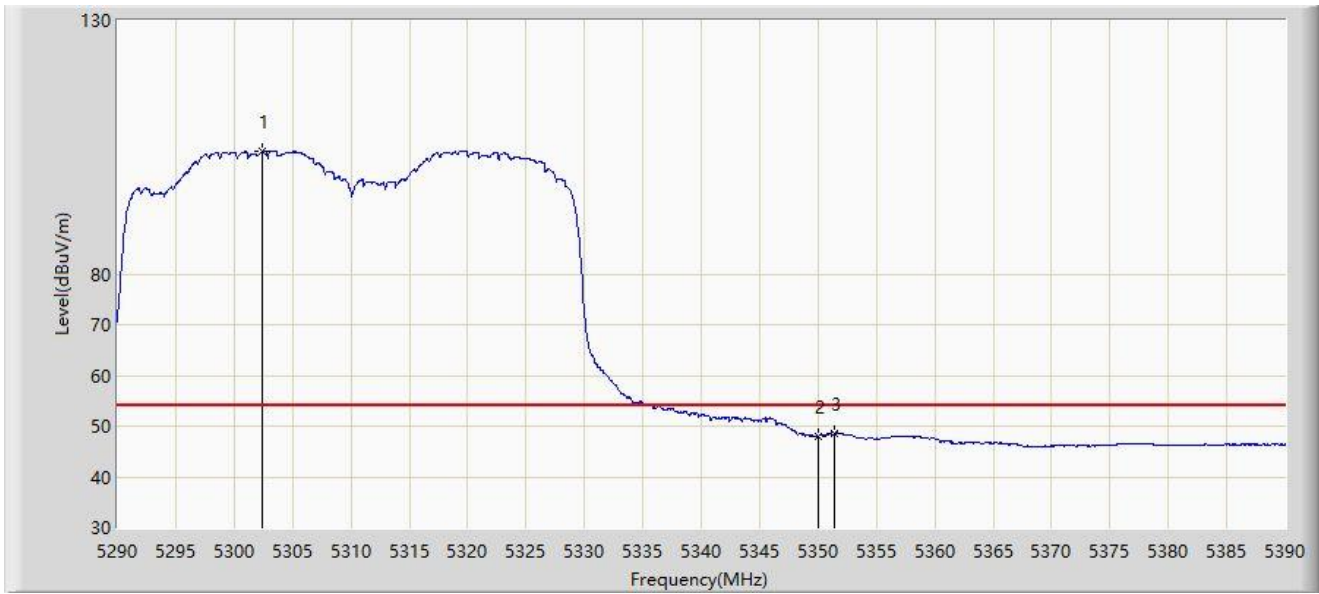


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5302.350 | 104.123 | 101.336 | N/A | N/A | 2.786 | AV |
| 2 | | 5350.000 | 48.109 | 45.278 | -5.891 | 54.000 | 2.832 | AV |
| 3 | * | 5351.400 | 48.511 | 45.704 | -5.489 | 54.000 | 2.807 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz | |

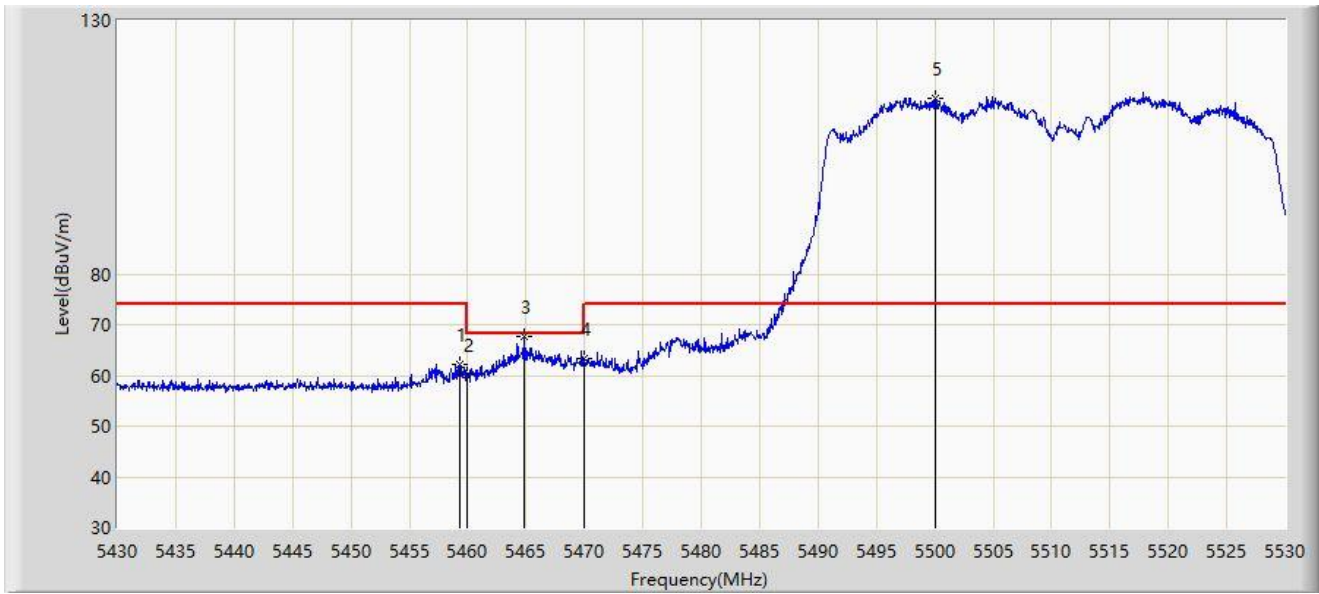


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5459.300 | 62.195 | 58.989 | -11.805 | 74.000 | 3.206 | PK |
| 2 | | 5460.000 | 60.061 | 56.842 | -13.939 | 74.000 | 3.219 | PK |
| 3 | * | 5464.800 | 67.612 | 64.300 | -0.588 | 68.200 | 3.312 | PK |
| 4 | | 5470.000 | 63.333 | 59.921 | -4.867 | 68.200 | 3.411 | PK |
| 5 | | 5500.000 | 114.558 | 111.302 | N/A | N/A | 3.256 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz | |

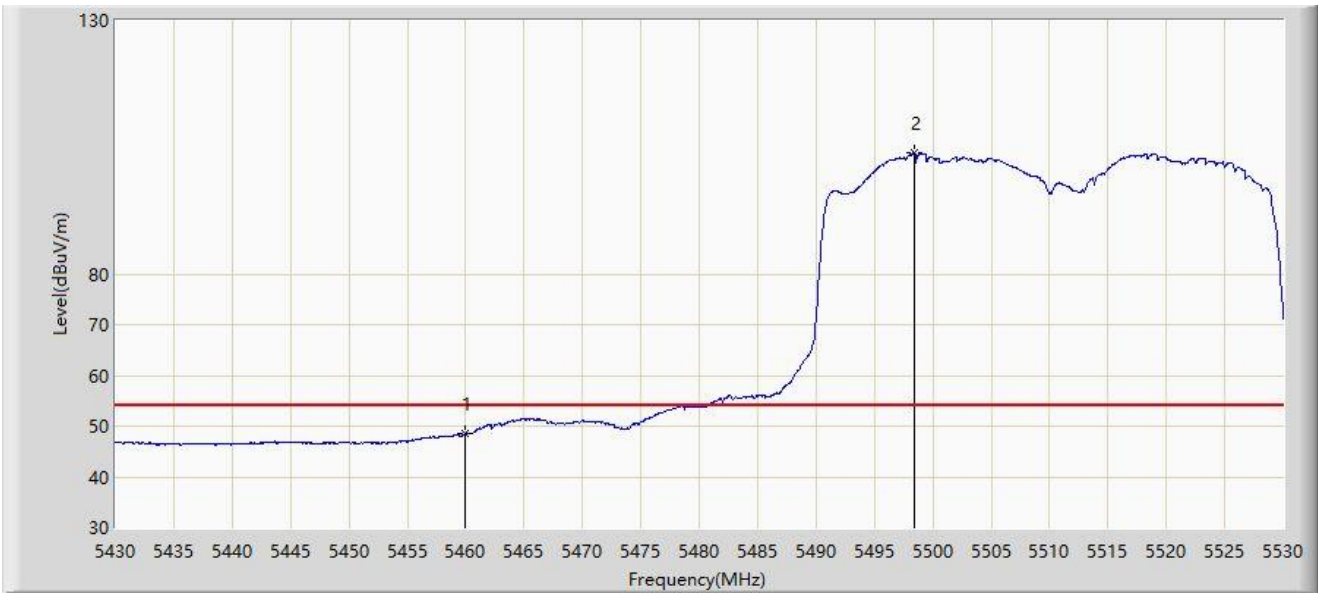


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5460.000 | 48.584 | 45.365 | -5.416 | 54.000 | 3.219 | AV |
| 2 | | 5498.400 | 103.839 | 100.572 | N/A | N/A | 3.266 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz | |

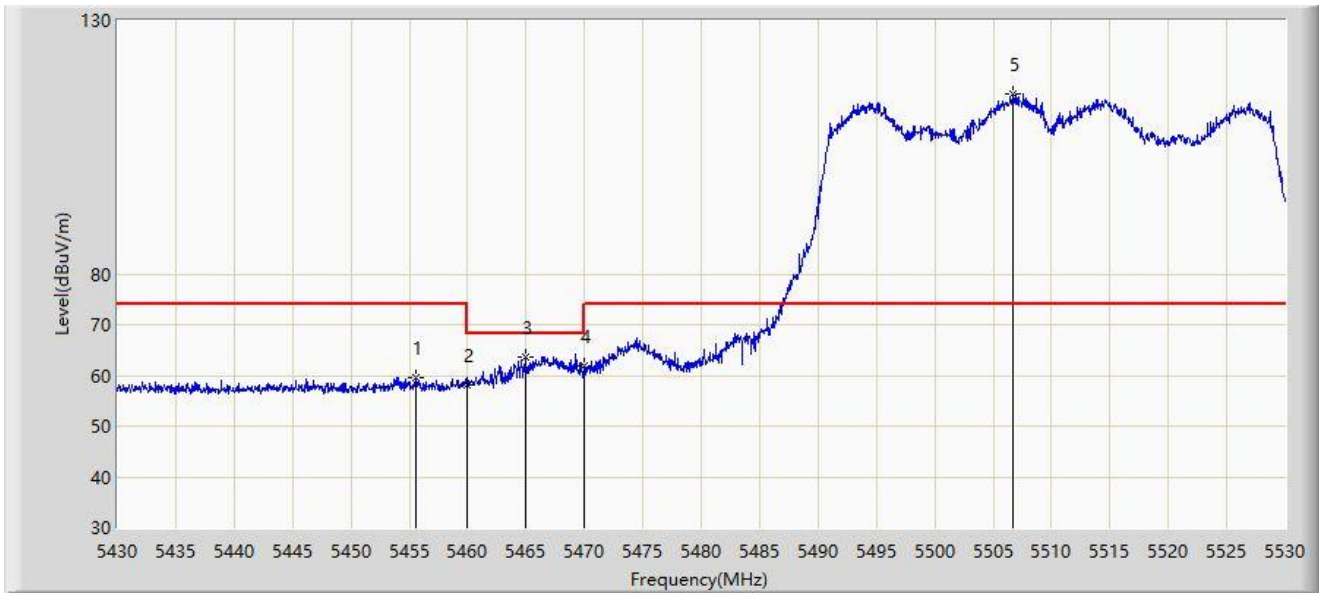


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5455.550 | 59.658 | 56.520 | -14.342 | 74.000 | 3.139 | PK |
| 2 | | 5460.000 | 58.071 | 54.852 | -15.929 | 74.000 | 3.219 | PK |
| 3 | * | 5464.950 | 63.509 | 60.194 | -4.691 | 68.200 | 3.315 | PK |
| 4 | | 5470.000 | 61.837 | 58.425 | -6.363 | 68.200 | 3.411 | PK |
| 5 | | 5506.650 | 115.513 | 112.309 | N/A | N/A | 3.203 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz | |

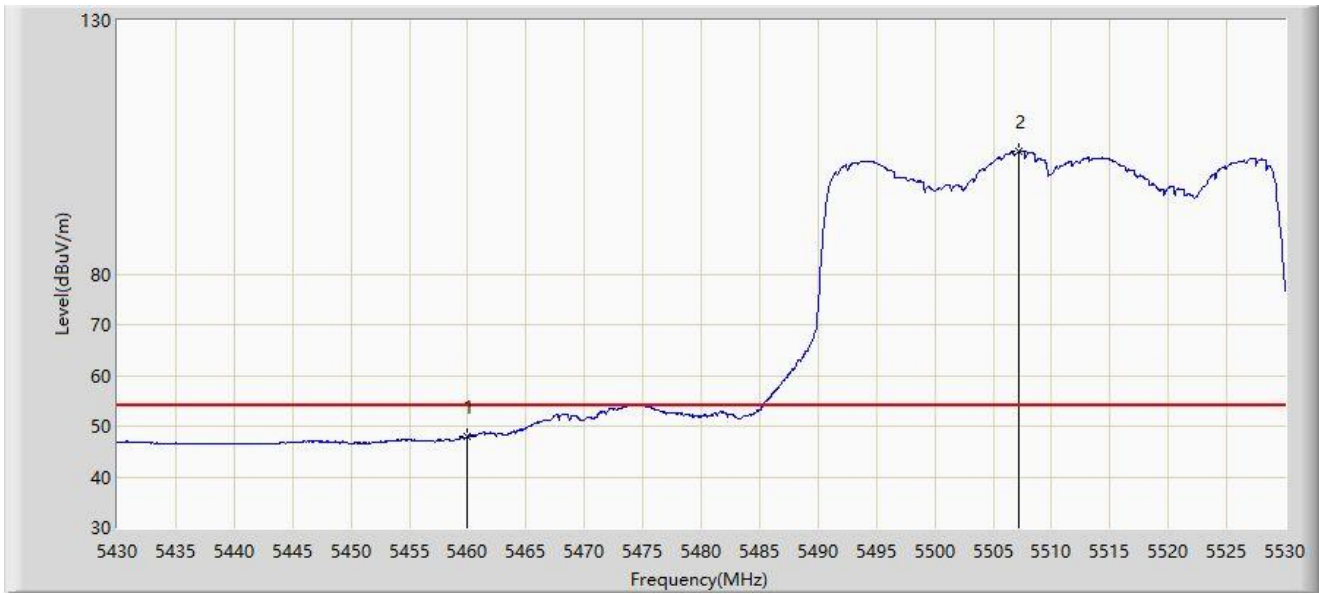


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5460.000 | 47.831 | 44.612 | -6.169 | 54.000 | 3.219 | AV |
| 2 | | 5507.150 | 104.104 | 100.906 | N/A | N/A | 3.198 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5670MHz | |

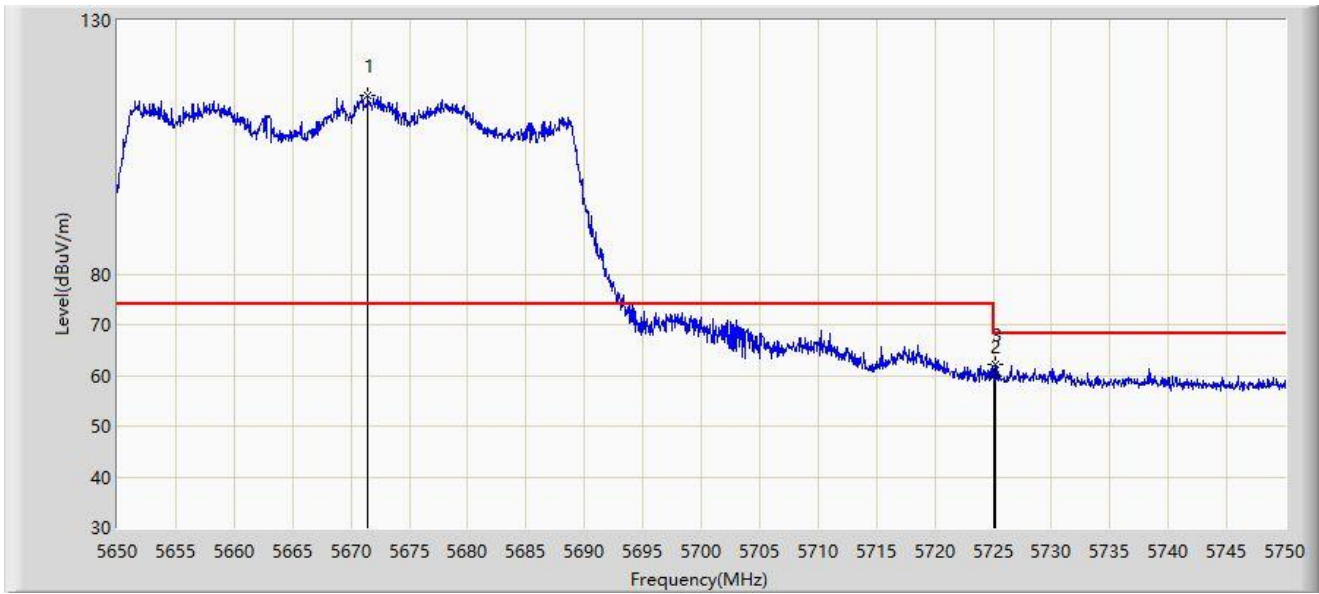


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5671.450 | 115.324 | 111.287 | N/A | N/A | 4.037 | PK |
| 2 | | 5725.000 | 59.939 | 55.251 | -8.261 | 68.200 | 4.688 | PK |
| 3 | * | 5725.150 | 62.273 | 57.583 | -5.927 | 68.200 | 4.690 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5670MHz | |

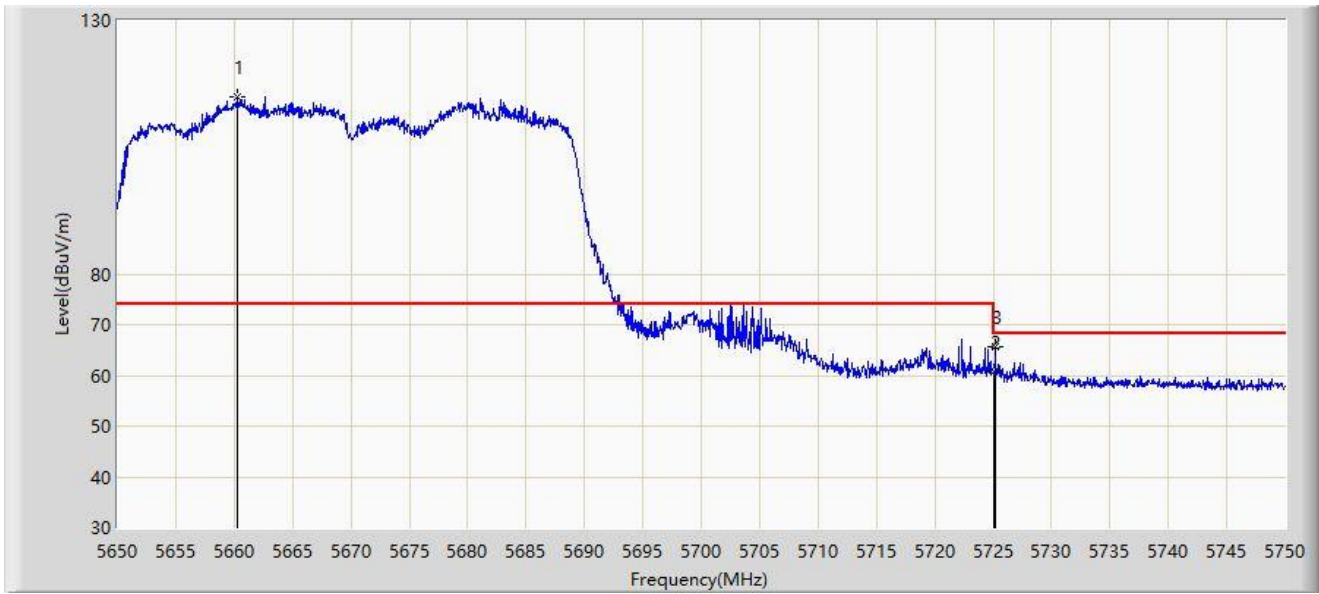


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5660.250 | 115.042 | 110.961 | N/A | N/A | 4.081 | PK |
| 2 | | 5725.000 | 60.613 | 55.925 | -7.587 | 68.200 | 4.688 | PK |
| 3 | * | 5725.200 | 65.723 | 61.033 | -2.477 | 68.200 | 4.691 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5755MHz | |

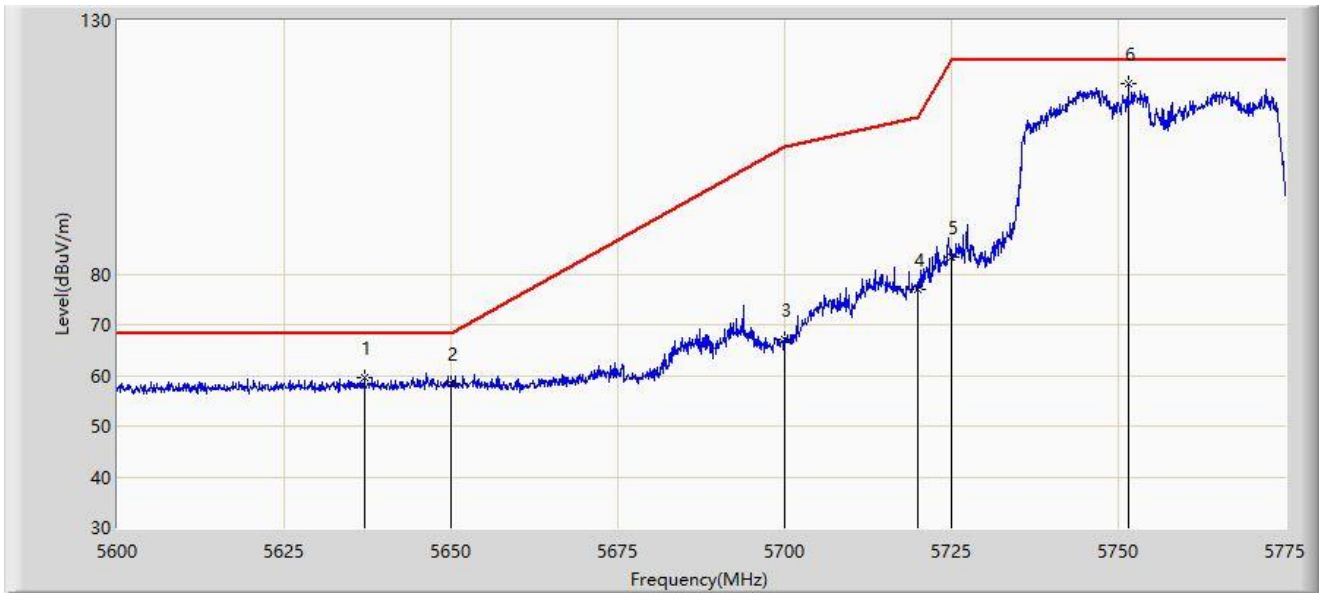


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5637.013 | 59.535 | 55.376 | -8.665 | 68.200 | 4.160 | PK |
| 2 | | 5650.000 | 58.372 | 54.212 | -9.828 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 67.224 | 62.794 | -37.976 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 76.826 | 72.176 | -33.974 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 83.439 | 78.751 | -38.761 | 122.200 | 4.688 | PK |
| 6 | | 5751.550 | 117.419 | 112.939 | N/A | N/A | 4.480 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5755MHz | |

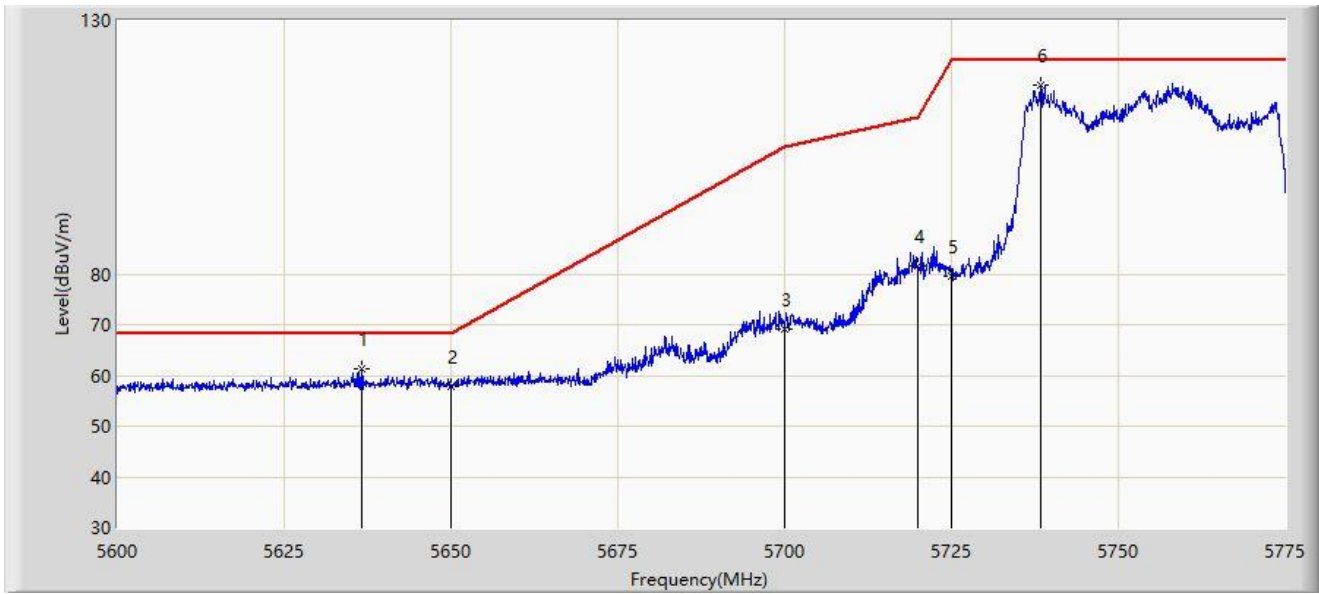


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5636.663 | 61.444 | 57.289 | -6.756 | 68.200 | 4.155 | PK |
| 2 | | 5650.000 | 57.744 | 53.584 | -10.456 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 69.048 | 64.618 | -36.152 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 81.467 | 76.817 | -29.333 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 79.467 | 74.779 | -42.733 | 122.200 | 4.688 | PK |
| 6 | | 5738.337 | 117.379 | 112.900 | N/A | N/A | 4.479 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5795MHz | |

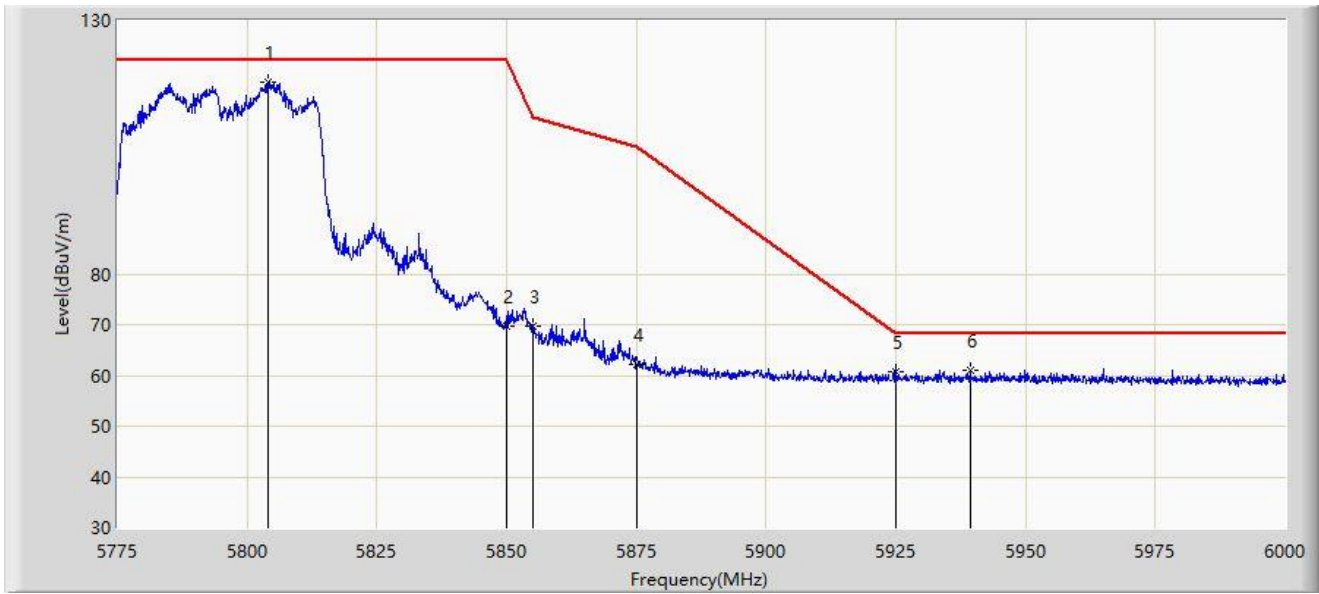


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5803.913 | 117.786 | 112.744 | N/A | N/A | 5.042 | PK |
| 2 | | 5850.000 | 69.761 | 64.801 | -52.439 | 122.200 | 4.960 | PK |
| 3 | | 5855.000 | 69.775 | 64.756 | -41.025 | 110.800 | 5.019 | PK |
| 4 | | 5875.000 | 62.183 | 57.047 | -43.017 | 105.200 | 5.136 | PK |
| 5 | | 5925.000 | 60.600 | 55.330 | -7.600 | 68.200 | 5.271 | PK |
| 6 | * | 5939.250 | 60.997 | 55.678 | -7.203 | 68.200 | 5.320 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 5795MHz | |

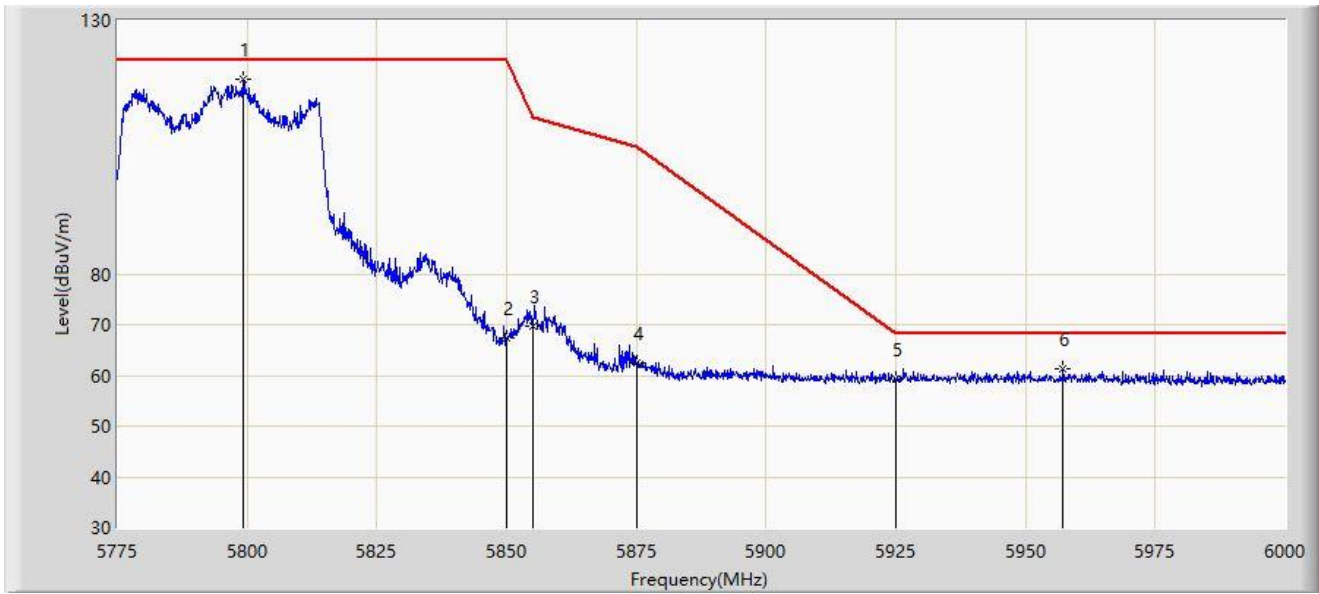


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5799.300 | 118.449 | 113.390 | N/A | N/A | 5.059 | PK |
| 2 | | 5850.000 | 67.282 | 62.322 | -54.918 | 122.200 | 4.960 | PK |
| 3 | | 5855.000 | 69.839 | 64.820 | -40.961 | 110.800 | 5.019 | PK |
| 4 | | 5875.000 | 62.470 | 57.334 | -42.730 | 105.200 | 5.136 | PK |
| 5 | | 5925.000 | 59.271 | 54.001 | -8.929 | 68.200 | 5.271 | PK |
| 6 | * | 5957.138 | 61.261 | 55.852 | -6.939 | 68.200 | 5.409 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz | |

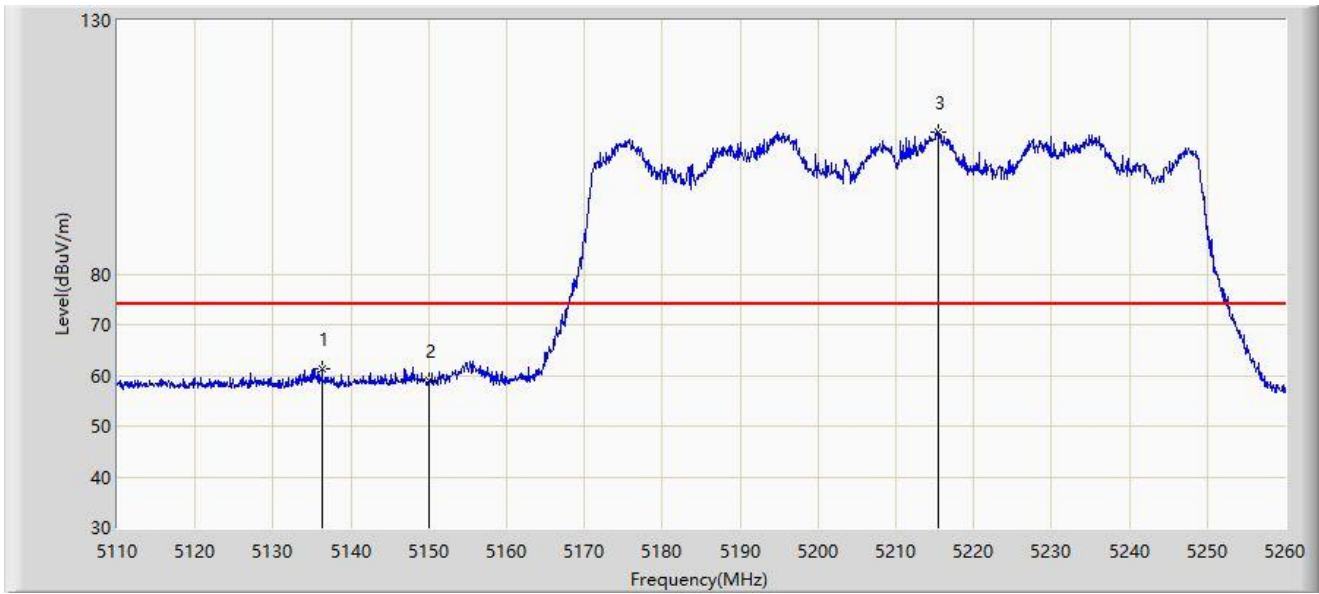


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5136.325 | 61.278 | 57.952 | -12.722 | 74.000 | 3.326 | PK |
| 2 | | 5150.000 | 58.869 | 55.370 | -15.131 | 74.000 | 3.499 | PK |
| 3 | | 5215.375 | 107.847 | 104.878 | N/A | N/A | 2.969 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz | |

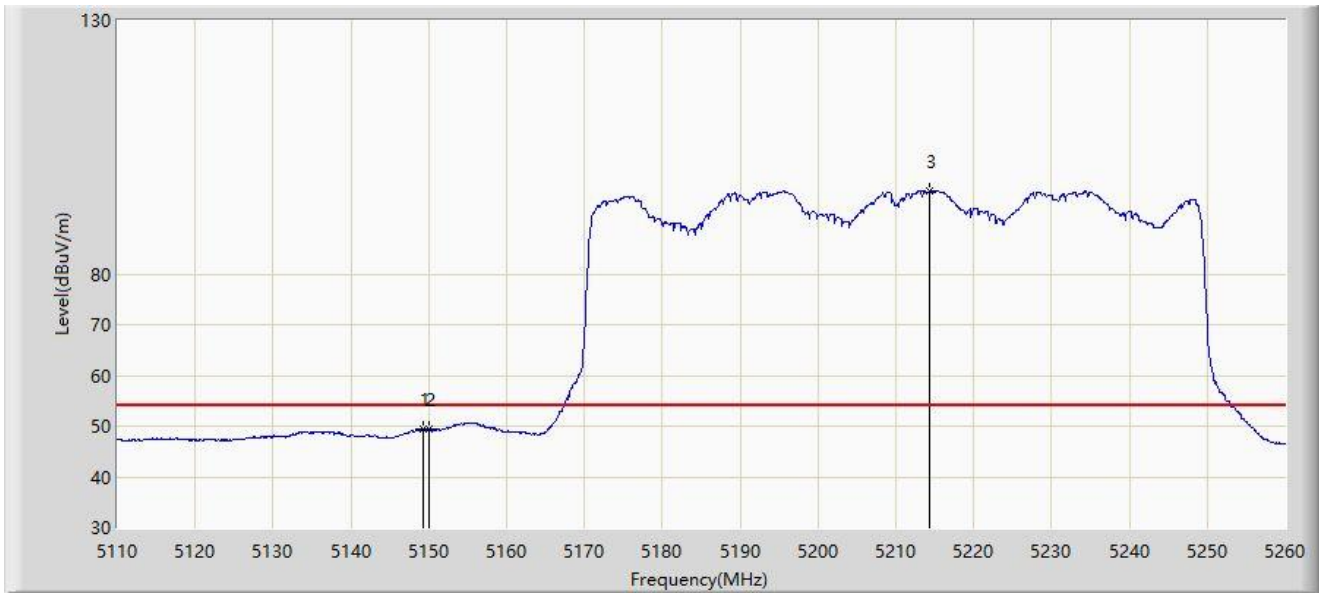

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5149.375 | 49.489 | 45.992 | -4.511 | 54.000 | 3.497 | AV |
| 2 | * | 5150.000 | 49.490 | 45.991 | -4.510 | 54.000 | 3.499 | AV |
| 3 | | 5214.325 | 96.335 | 93.370 | N/A | N/A | 2.965 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5146.075 | 61.314 | 57.850 | -12.686 | 74.000 | 3.464 | PK |
| 2 | | 5150.000 | 58.537 | 55.038 | -15.463 | 74.000 | 3.499 | PK |
| 3 | | 5219.875 | 108.539 | 105.509 | N/A | N/A | 3.030 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz | |

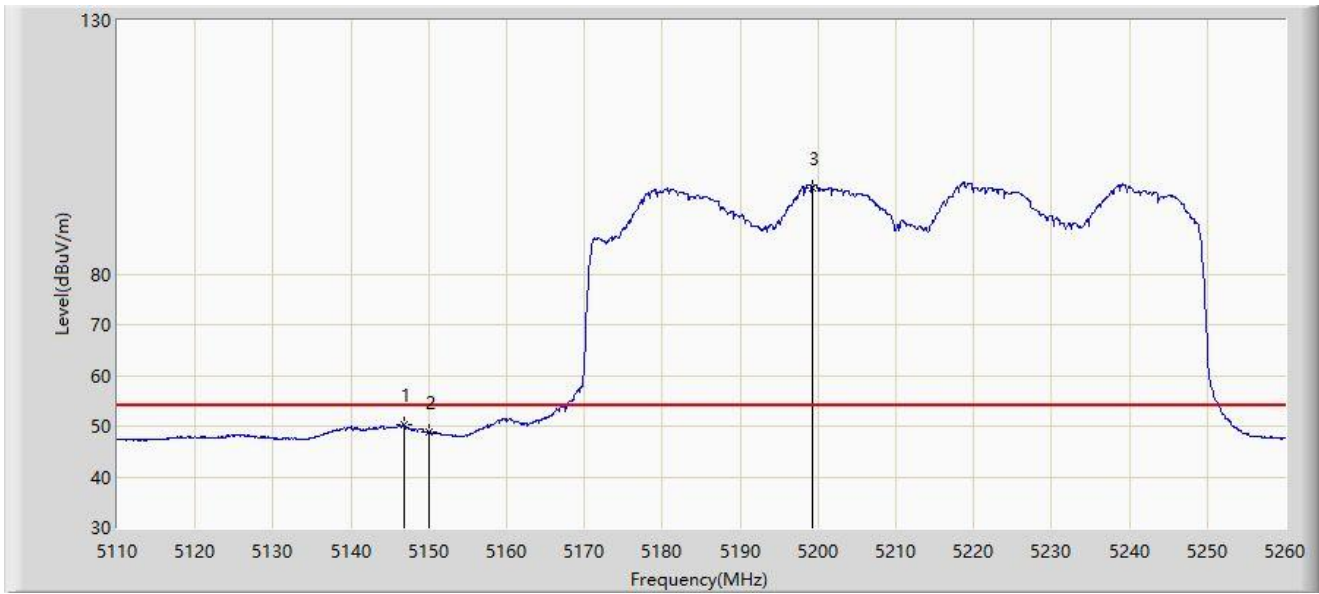


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5146.750 | 50.253 | 46.779 | -3.747 | 54.000 | 3.473 | AV |
| 2 | | 5150.000 | 48.817 | 45.318 | -5.183 | 54.000 | 3.499 | AV |
| 3 | | 5199.250 | 97.087 | 94.172 | N/A | N/A | 2.915 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz | |

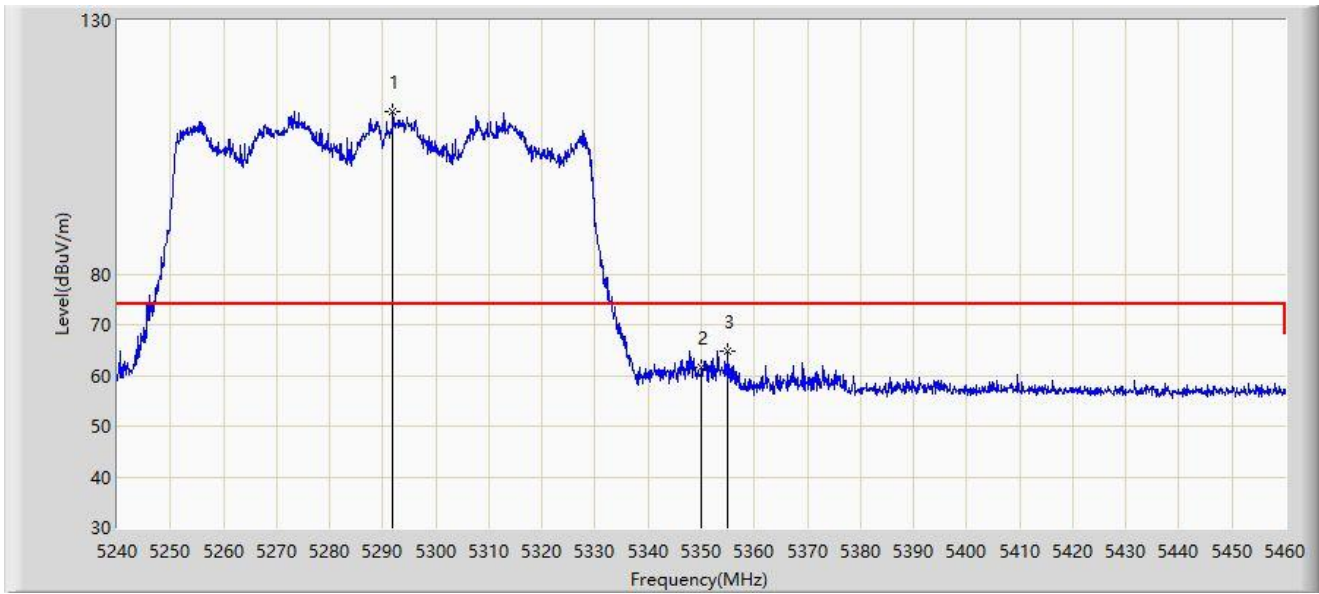


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5291.810 | 111.900 | 109.244 | N/A | N/A | 2.656 | PK |
| 2 | | 5350.000 | 61.490 | 58.659 | -12.510 | 74.000 | 2.832 | PK |
| 3 | * | 5355.060 | 64.833 | 62.021 | -9.167 | 74.000 | 2.812 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz | |

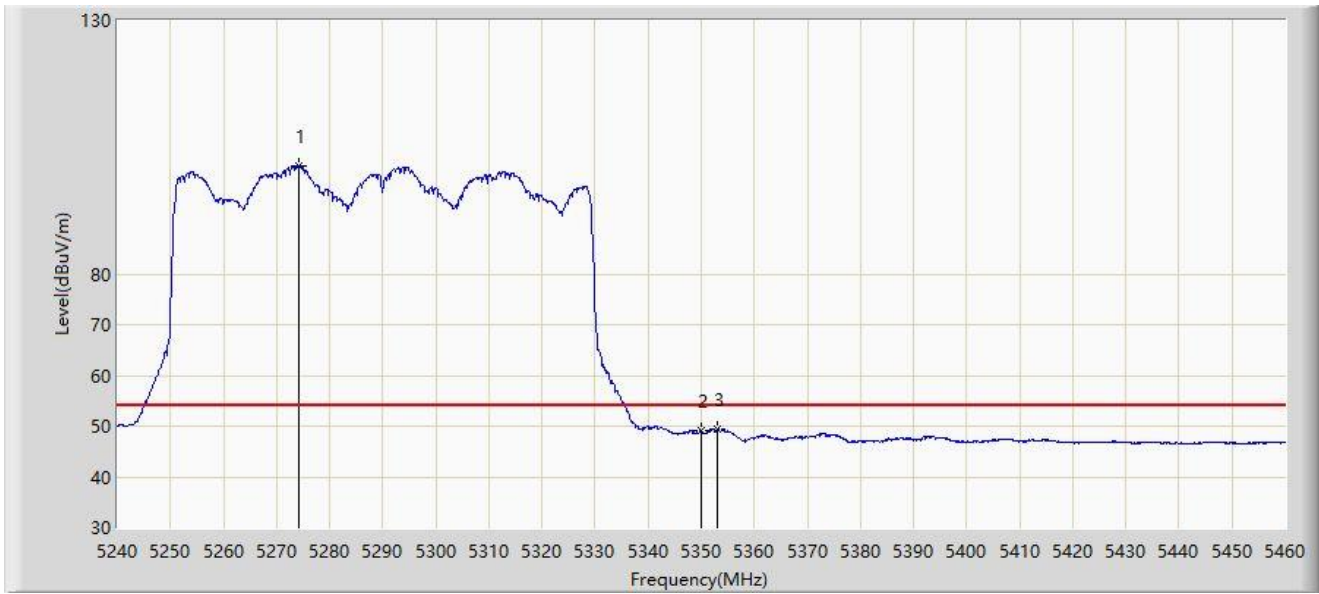


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5274.100 | 101.410 | 98.759 | N/A | N/A | 2.651 | AV |
| 2 | | 5350.000 | 48.999 | 46.168 | -5.001 | 54.000 | 2.832 | AV |
| 3 | * | 5353.080 | 49.444 | 46.642 | -4.556 | 54.000 | 2.802 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz | |

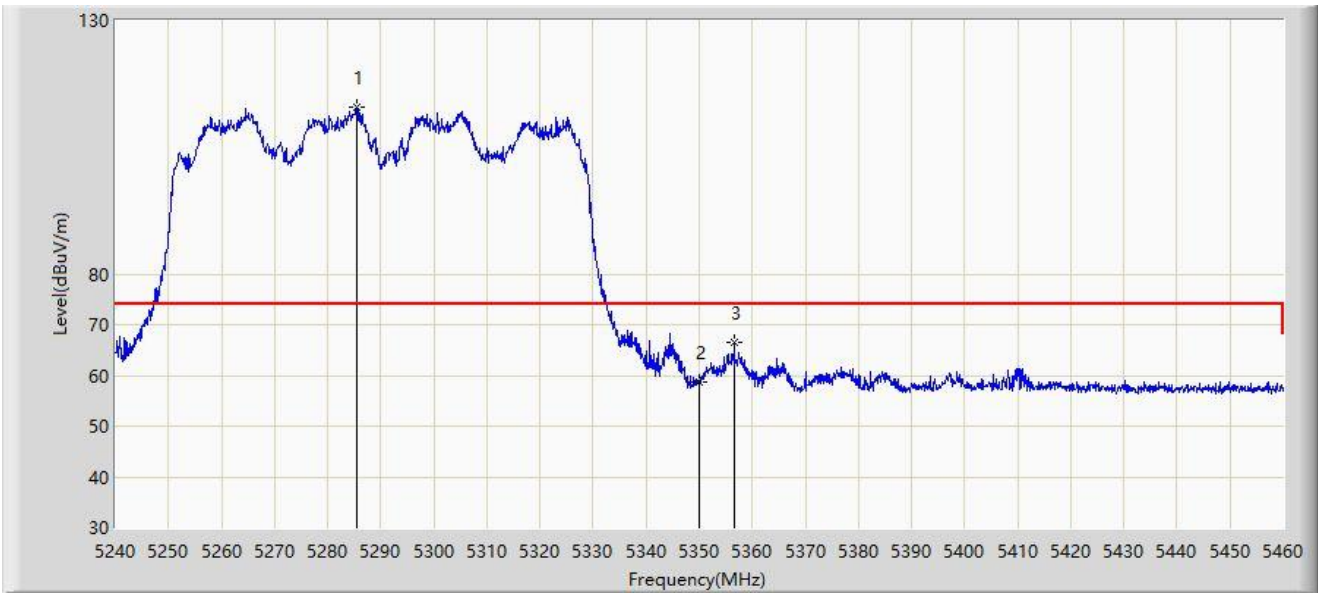


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5285.540 | 113.035 | 110.466 | N/A | N/A | 2.568 | PK |
| 2 | | 5350.000 | 58.787 | 55.956 | -15.213 | 74.000 | 2.832 | PK |
| 3 | * | 5356.600 | 66.649 | 63.829 | -7.351 | 74.000 | 2.819 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz | |

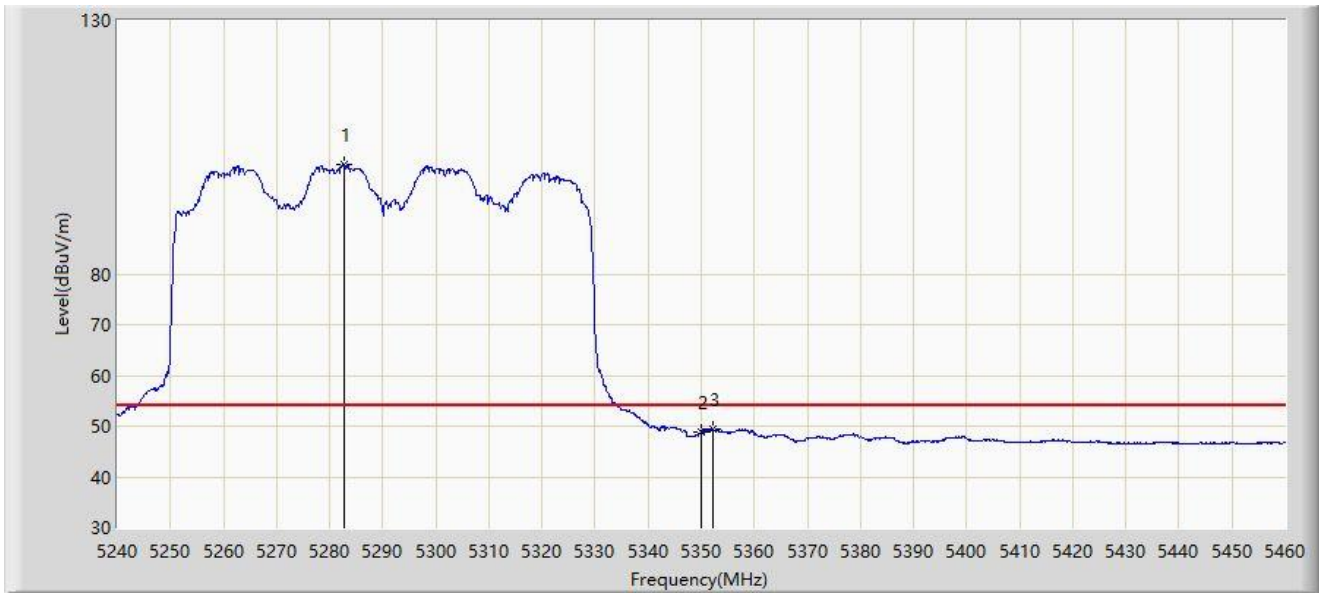


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5282.680 | 101.650 | 99.093 | N/A | N/A | 2.557 | AV |
| 2 | | 5350.000 | 48.933 | 46.102 | -5.067 | 54.000 | 2.832 | AV |
| 3 | * | 5352.090 | 49.331 | 46.533 | -4.669 | 54.000 | 2.798 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz | |

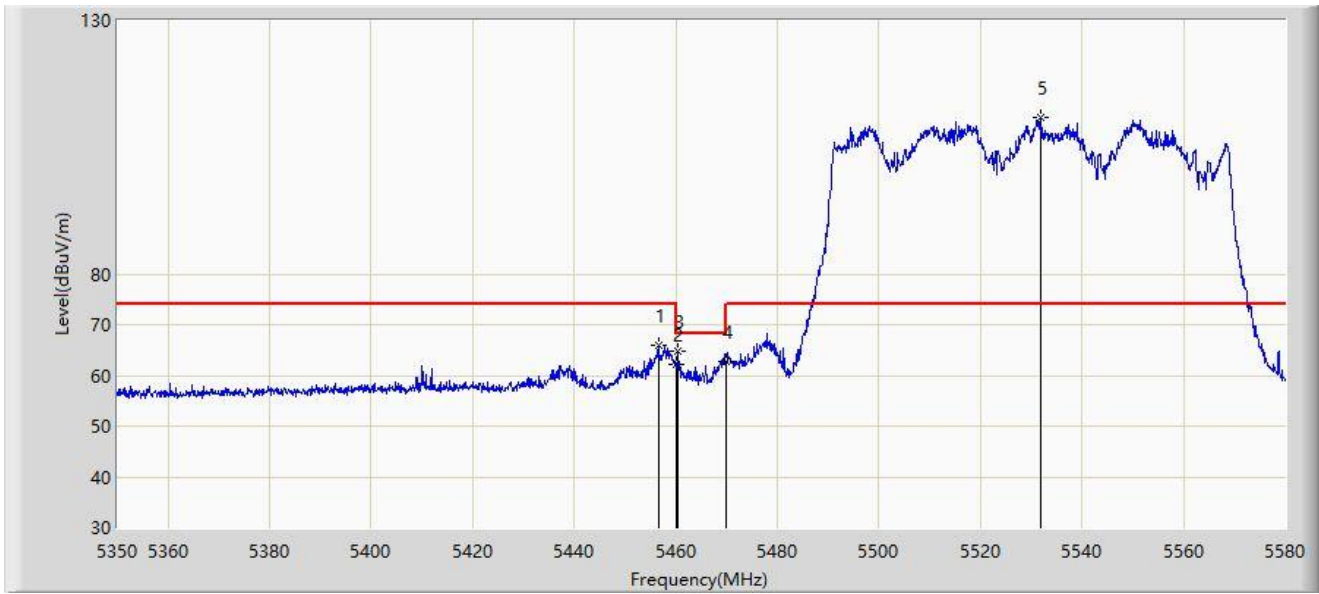


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5456.605 | 65.940 | 62.785 | -8.060 | 74.000 | 3.155 | PK |
| 2 | | 5460.000 | 62.119 | 58.900 | -11.881 | 74.000 | 3.219 | PK |
| 3 | * | 5460.515 | 64.640 | 61.411 | -3.560 | 68.200 | 3.230 | PK |
| 4 | | 5470.000 | 62.669 | 59.257 | -5.531 | 68.200 | 3.411 | PK |
| 5 | | 5531.815 | 111.004 | 107.708 | N/A | N/A | 3.295 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz | |

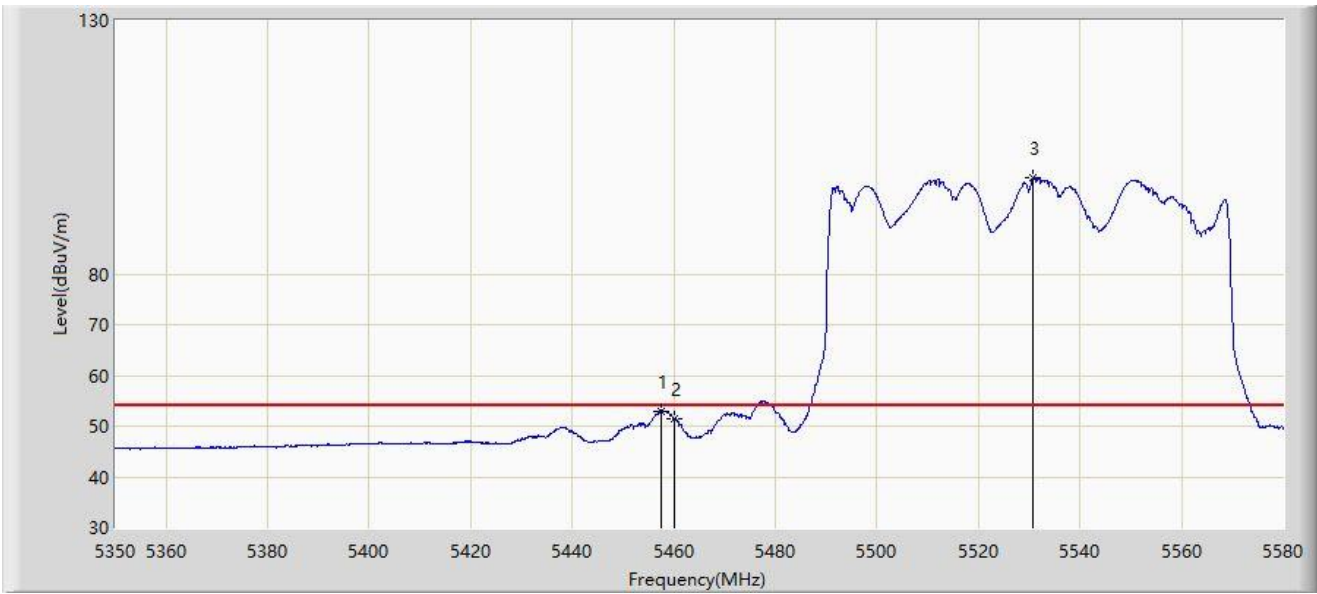


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5457.525 | 52.934 | 49.763 | -1.066 | 54.000 | 3.172 | AV |
| 2 | | 5460.000 | 51.526 | 48.307 | -2.474 | 54.000 | 3.219 | AV |
| 3 | | 5530.780 | 98.904 | 95.621 | N/A | N/A | 3.283 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz | |

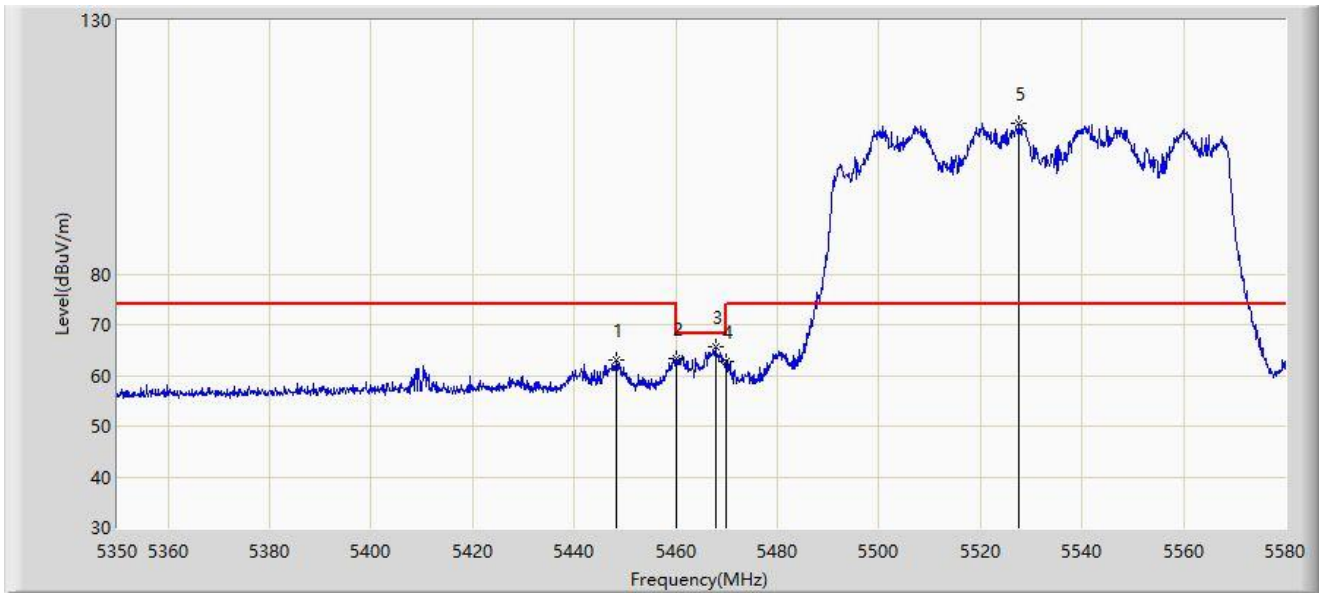


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5448.210 | 63.040 | 59.885 | -10.960 | 74.000 | 3.155 | PK |
| 2 | | 5460.000 | 63.191 | 59.972 | -10.809 | 74.000 | 3.219 | PK |
| 3 | * | 5467.760 | 65.709 | 62.340 | -2.491 | 68.200 | 3.369 | PK |
| 4 | | 5470.000 | 62.788 | 59.376 | -5.412 | 68.200 | 3.411 | PK |
| 5 | | 5527.675 | 109.647 | 106.414 | N/A | N/A | 3.233 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz | |

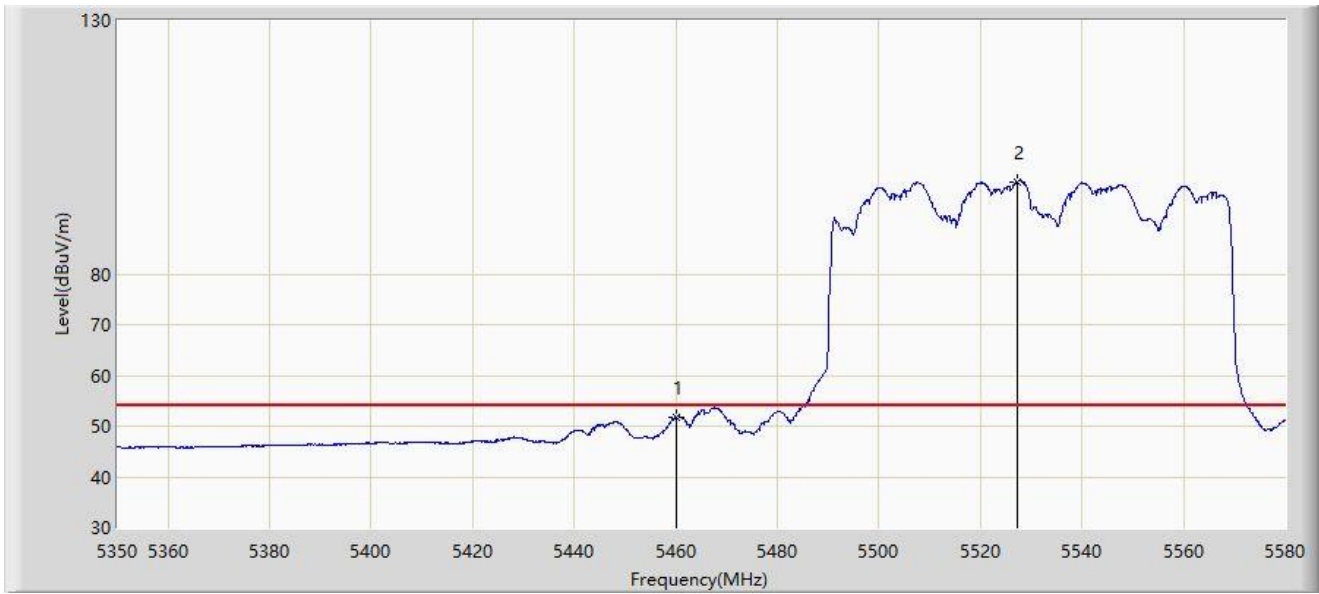

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5460.000 | 51.837 | 48.618 | -2.163 | 54.000 | 3.219 | AV |
| 2 | | 5527.330 | 98.244 | 95.018 | N/A | N/A | 3.226 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5610MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5611.585 | 115.596 | 111.888 | N/A | N/A | 3.708 | PK |
| 2 | | 5725.000 | 63.038 | 58.350 | -5.162 | 68.200 | 4.688 | PK |
| 3 | * | 5729.480 | 66.593 | 61.955 | -1.607 | 68.200 | 4.637 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5610MHz | |

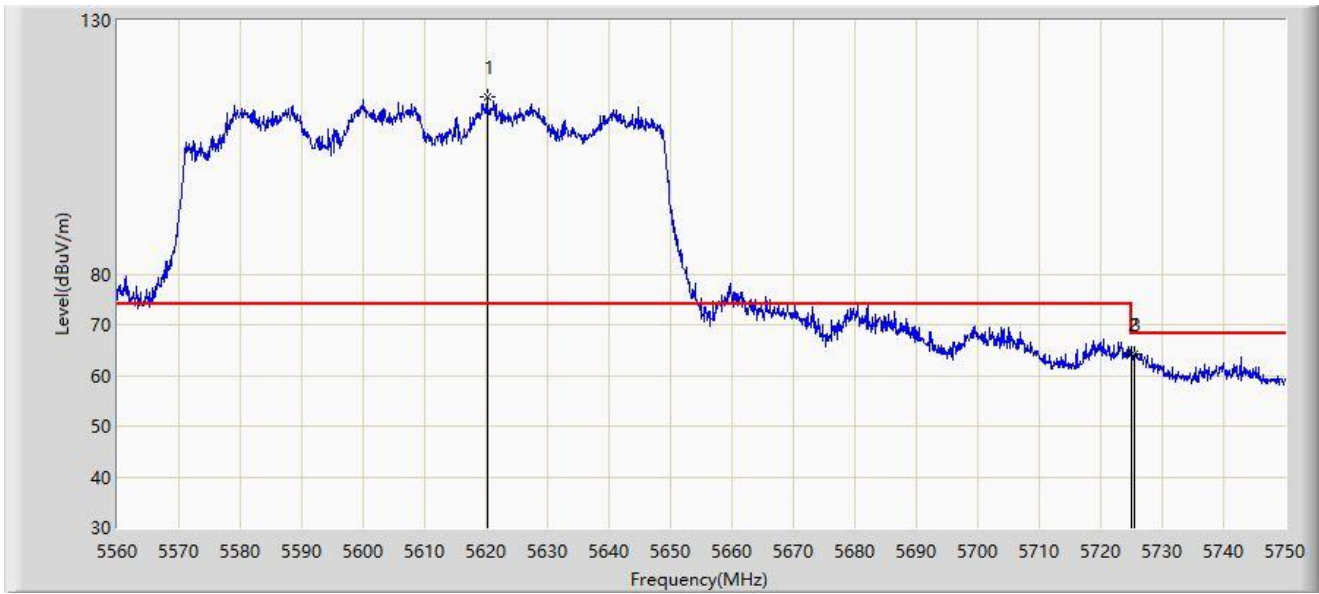


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 5620.230 | 114.944 | 111.041 | N/A | N/A | 3.903 | PK |
| 2 | * | 5725.000 | 64.273 | 59.585 | -3.927 | 68.200 | 4.688 | PK |
| 3 | | 5725.490 | 64.229 | 59.537 | -3.971 | 68.200 | 4.692 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5775MHz | |

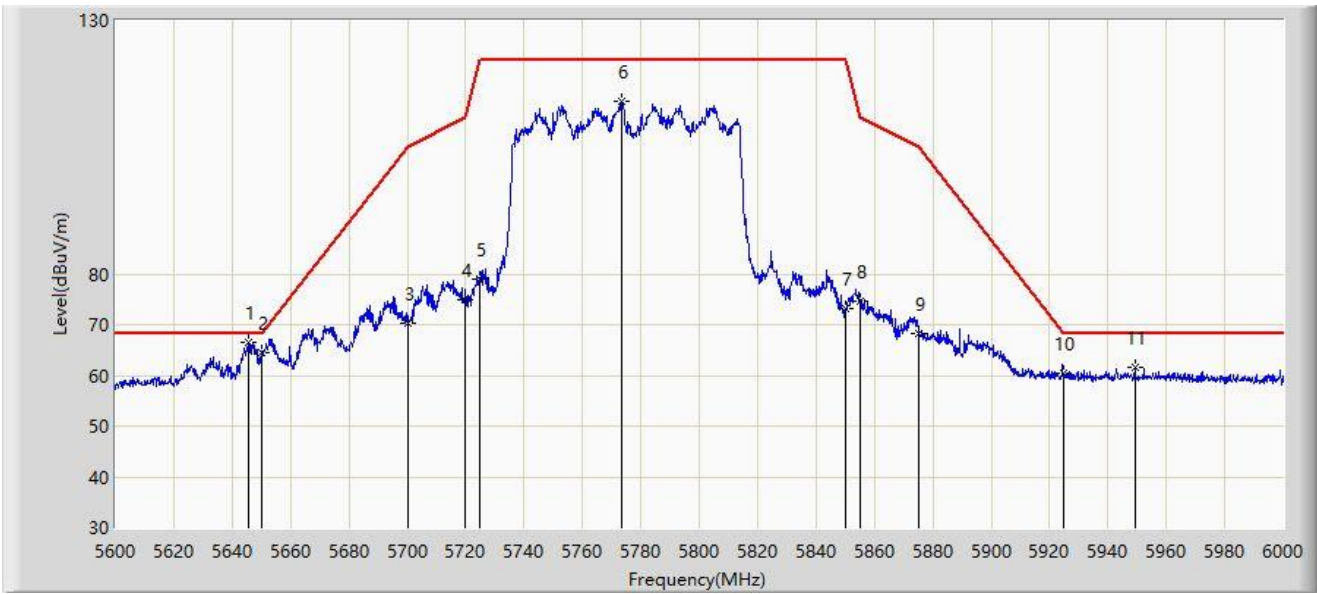


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5645.800 | 66.647 | 62.463 | -1.553 | 68.200 | 4.184 | PK |
| 2 | | 5650.000 | 64.636 | 60.476 | -3.564 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 70.233 | 65.803 | -34.967 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 74.794 | 70.144 | -36.006 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 79.064 | 74.376 | -43.136 | 122.200 | 4.688 | PK |
| 6 | | 5773.400 | 114.102 | 109.290 | N/A | N/A | 4.812 | PK |
| 7 | | 5850.000 | 73.104 | 68.144 | -49.096 | 122.200 | 4.960 | PK |
| 8 | | 5855.000 | 74.494 | 69.475 | -36.306 | 110.800 | 5.019 | PK |
| 9 | | 5875.000 | 68.313 | 63.177 | -36.887 | 105.200 | 5.136 | PK |
| 10 | | 5925.000 | 60.536 | 55.266 | -7.664 | 68.200 | 5.271 | PK |
| 11 | | 5949.200 | 61.667 | 56.283 | -6.533 | 68.200 | 5.383 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5.8G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at 5775MHz | |

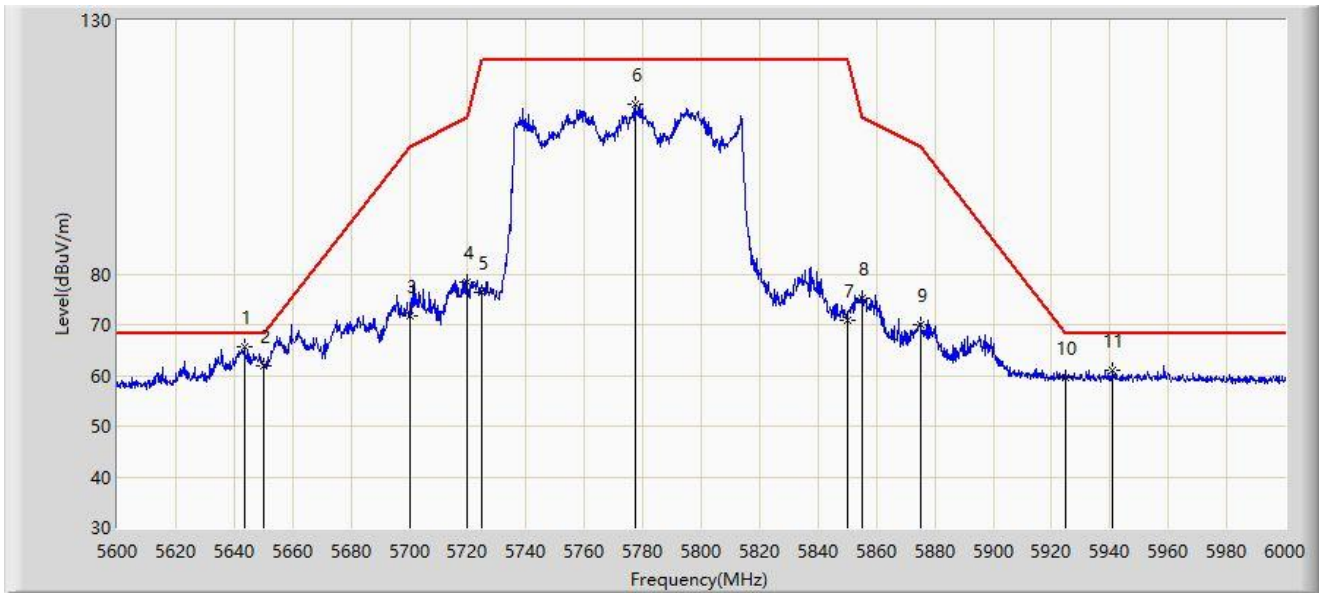


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5643.400 | 65.719 | 61.522 | -2.481 | 68.200 | 4.197 | PK |
| 2 | | 5650.000 | 61.962 | 57.802 | -6.238 | 68.200 | 4.160 | PK |
| 3 | | 5700.000 | 71.836 | 67.406 | -33.364 | 105.200 | 4.430 | PK |
| 4 | | 5720.000 | 78.367 | 73.717 | -32.433 | 110.800 | 4.649 | PK |
| 5 | | 5725.000 | 76.290 | 71.602 | -45.910 | 122.200 | 4.688 | PK |
| 6 | | 5777.200 | 113.558 | 108.688 | N/A | N/A | 4.870 | PK |
| 7 | | 5850.000 | 70.847 | 65.887 | -51.353 | 122.200 | 4.960 | PK |
| 8 | | 5855.000 | 75.276 | 70.257 | -35.524 | 110.800 | 5.019 | PK |
| 9 | | 5875.000 | 70.129 | 64.993 | -35.071 | 105.200 | 5.136 | PK |
| 10 | | 5925.000 | 59.427 | 54.157 | -8.773 | 68.200 | 5.271 | PK |
| 11 | | 5941.000 | 61.110 | 55.787 | -7.090 | 68.200 | 5.323 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz | |

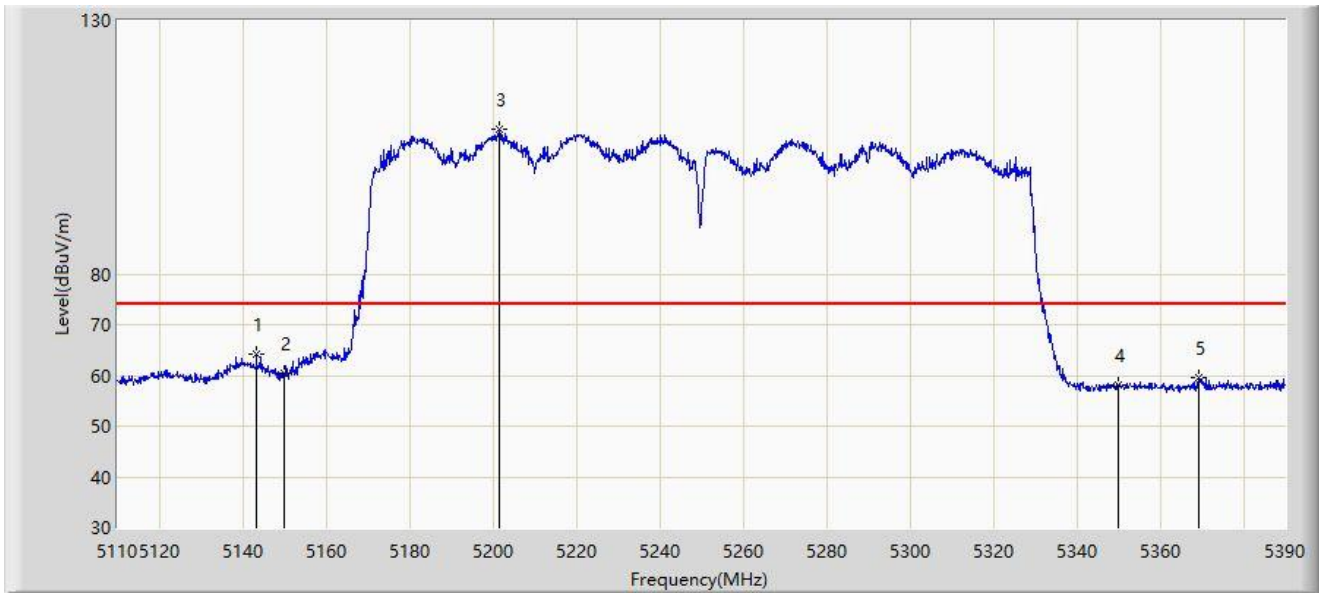


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5143.320 | 64.147 | 60.722 | -9.853 | 74.000 | 3.426 | PK |
| 2 | | 5150.000 | 60.308 | 56.809 | -13.692 | 74.000 | 3.499 | PK |
| 3 | | 5201.560 | 108.466 | 105.543 | N/A | N/A | 2.923 | PK |
| 4 | | 5350.000 | 58.155 | 55.324 | -15.845 | 74.000 | 2.832 | PK |
| 5 | | 5369.420 | 59.550 | 56.663 | -14.450 | 74.000 | 2.887 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz | |

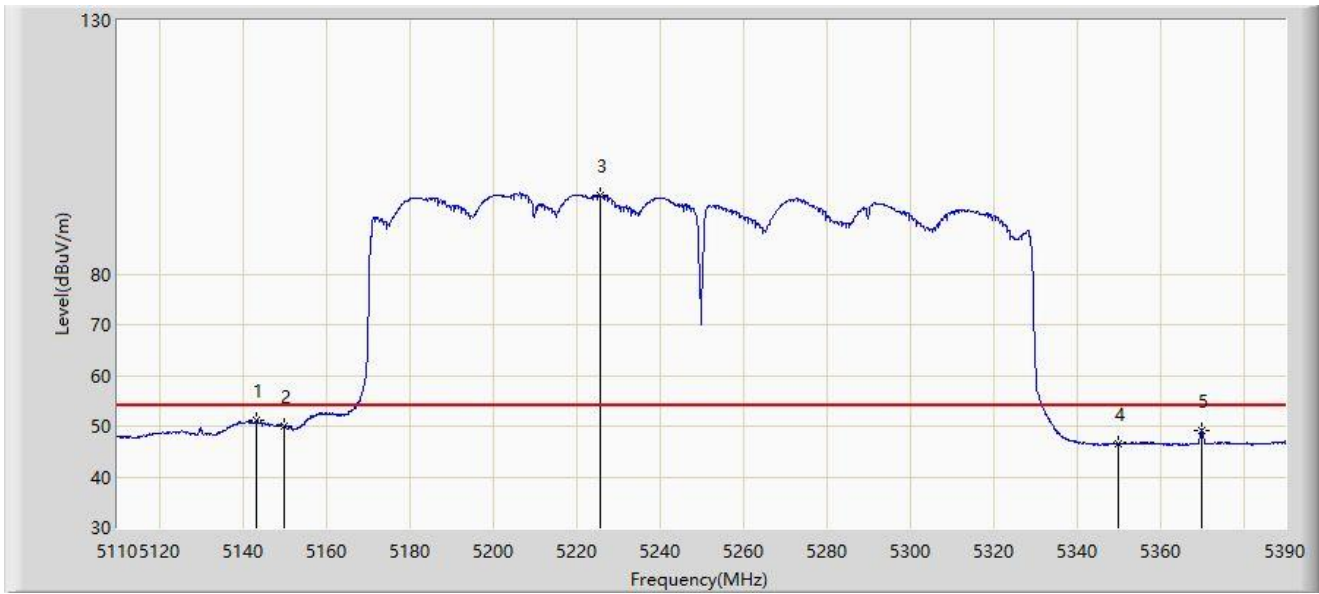


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5143.460 | 51.024 | 47.597 | -2.976 | 54.000 | 3.427 | AV |
| 2 | | 5150.000 | 50.086 | 46.587 | -3.914 | 54.000 | 3.499 | AV |
| 3 | | 5225.640 | 95.478 | 92.350 | N/A | N/A | 3.128 | AV |
| 4 | | 5350.000 | 46.497 | 43.666 | -7.503 | 54.000 | 2.832 | AV |
| 5 | | 5369.840 | 49.164 | 46.268 | -4.836 | 54.000 | 2.896 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz | |

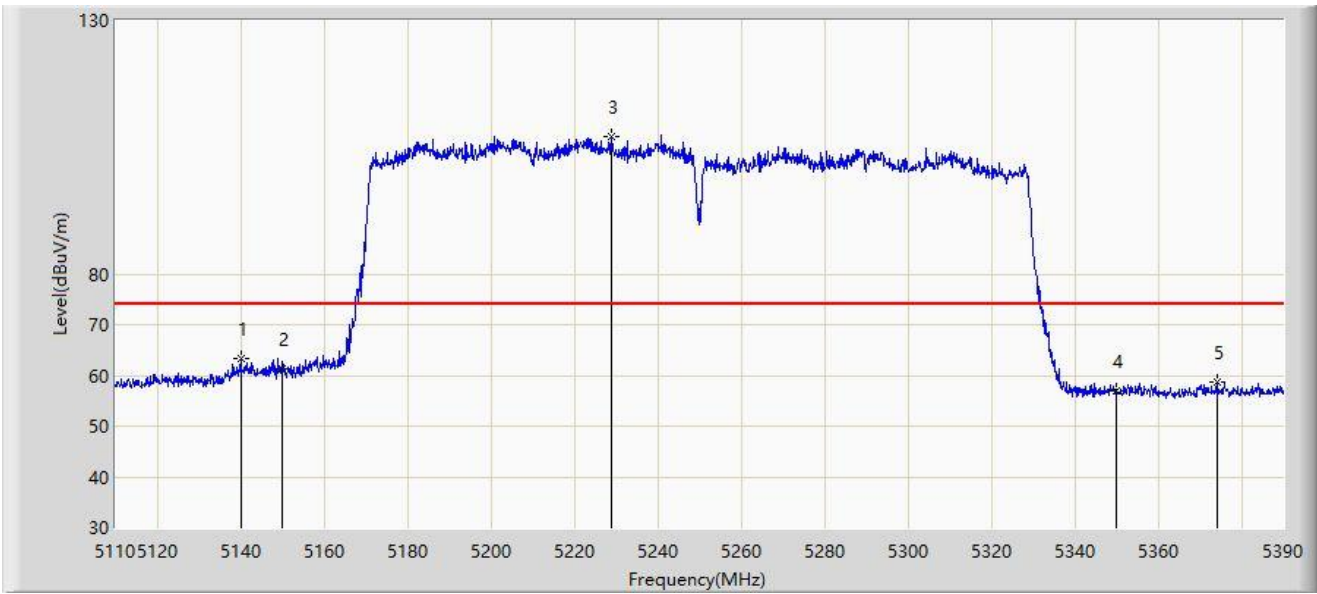


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5140.100 | 63.341 | 59.961 | -10.659 | 74.000 | 3.380 | PK |
| 2 | | 5150.000 | 61.292 | 57.793 | -12.708 | 74.000 | 3.499 | PK |
| 3 | | 5228.860 | 107.198 | 104.007 | N/A | N/A | 3.191 | PK |
| 4 | | 5350.000 | 57.029 | 54.198 | -16.971 | 74.000 | 2.832 | PK |
| 5 | | 5374.040 | 58.737 | 55.758 | -15.263 | 74.000 | 2.979 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz | |

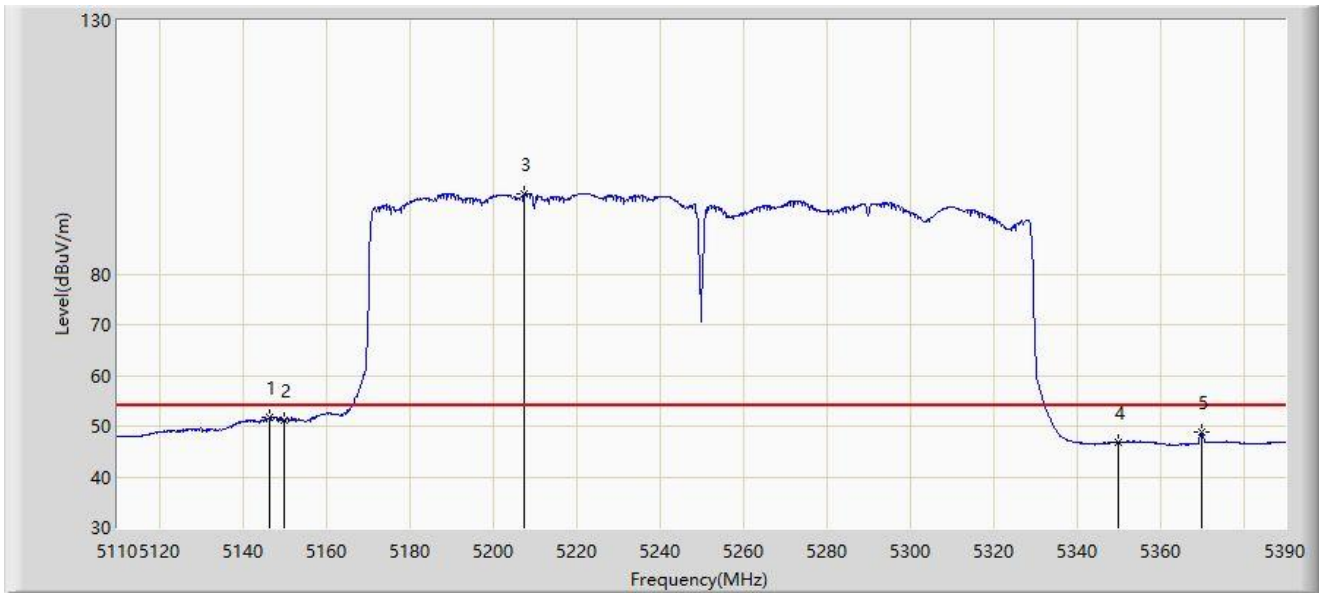


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5146.400 | 51.643 | 48.174 | -2.357 | 54.000 | 3.469 | AV |
| 2 | | 5150.000 | 51.267 | 47.768 | -2.733 | 54.000 | 3.499 | AV |
| 3 | | 5207.580 | 95.700 | 92.757 | N/A | N/A | 2.943 | AV |
| 4 | | 5350.000 | 46.805 | 43.974 | -7.195 | 54.000 | 2.832 | AV |
| 5 | | 5369.980 | 48.933 | 46.035 | -5.067 | 54.000 | 2.898 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-04 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz | |

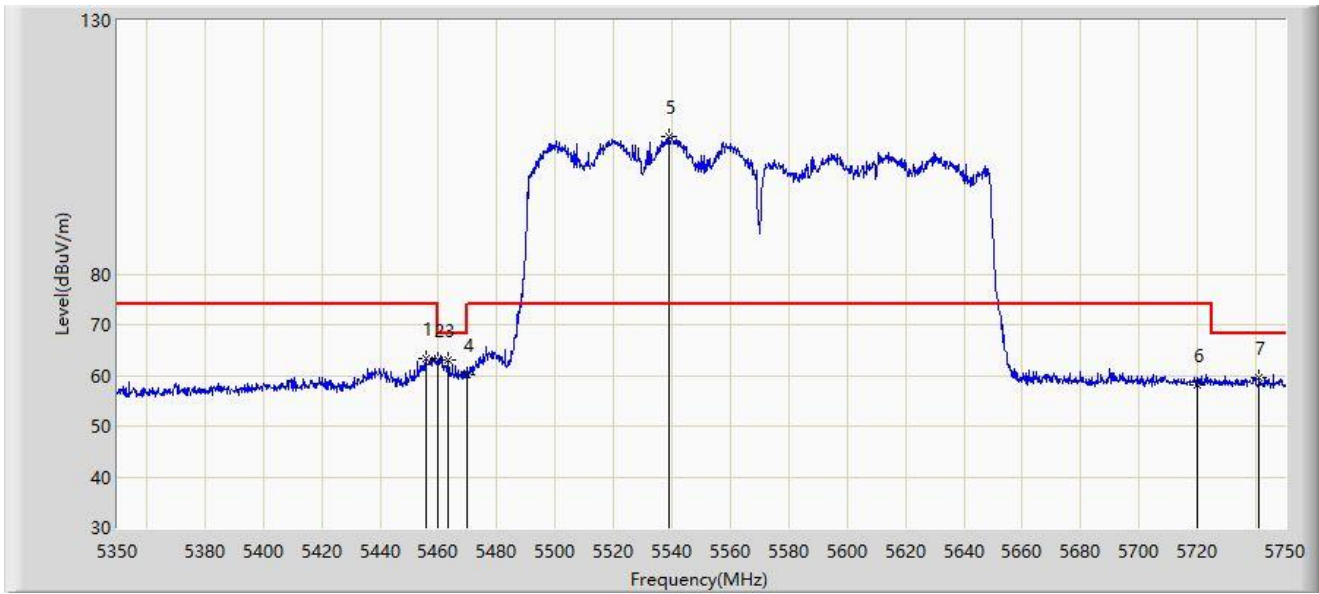


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5455.600 | 63.214 | 60.075 | -10.786 | 74.000 | 3.139 | PK |
| 2 | | 5460.000 | 62.950 | 59.731 | -11.050 | 74.000 | 3.219 | PK |
| 3 | * | 5463.200 | 63.040 | 59.759 | -5.160 | 68.200 | 3.281 | PK |
| 4 | | 5470.000 | 60.114 | 56.702 | -8.086 | 68.200 | 3.411 | PK |
| 5 | | 5538.800 | 106.976 | 103.593 | N/A | N/A | 3.384 | PK |
| 6 | | 5720.000 | 58.042 | 53.392 | -15.958 | 74.000 | 4.649 | PK |
| 7 | | 5741.200 | 59.665 | 55.238 | -8.535 | 68.200 | 4.428 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-05 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz | |

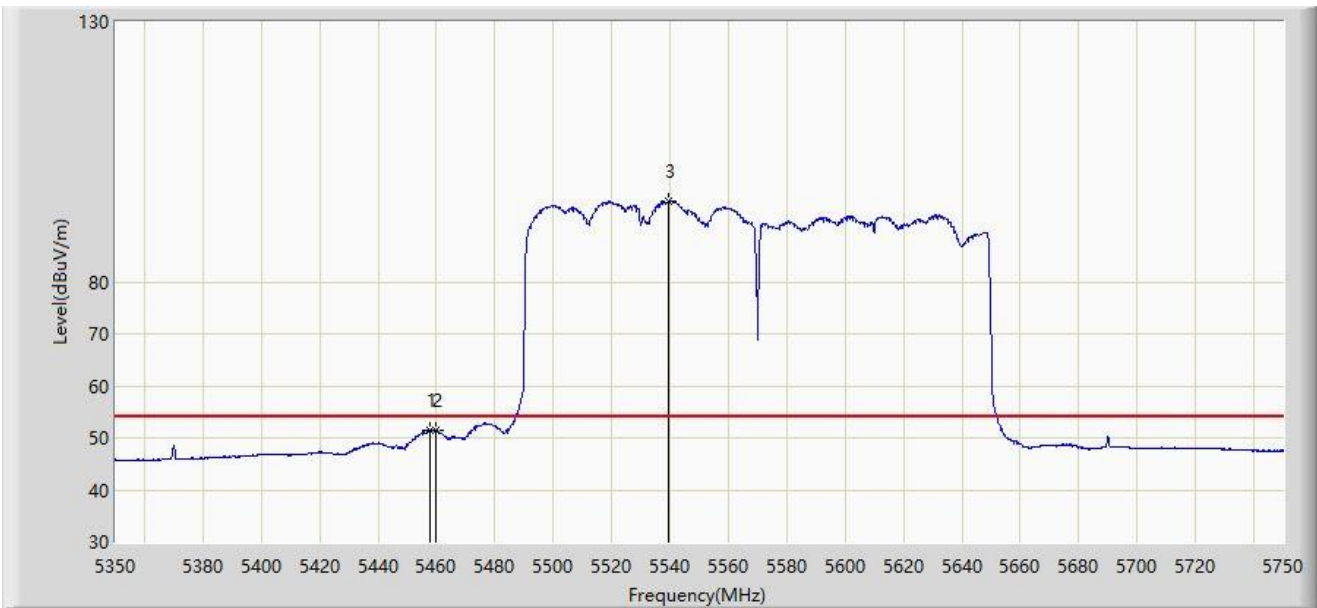


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 5458.000 | 51.475 | 48.294 | -2.525 | 54.000 | 3.181 | AV |
| 2 | | 5460.000 | 51.326 | 48.107 | -2.674 | 54.000 | 3.219 | AV |
| 3 | | 5539.400 | 95.411 | 92.021 | N/A | N/A | 3.390 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-05 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz | |

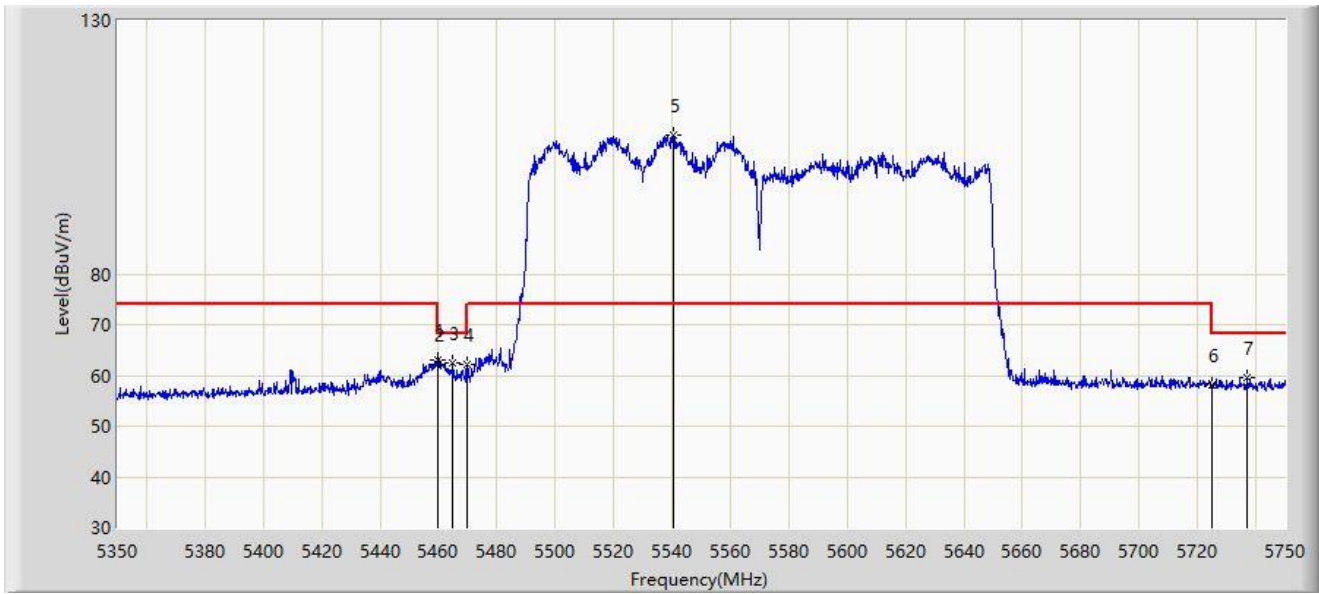


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 5459.600 | 63.135 | 59.924 | -10.865 | 74.000 | 3.211 | PK |
| 2 | | 5460.000 | 62.203 | 58.984 | -11.797 | 74.000 | 3.219 | PK |
| 3 | * | 5465.000 | 62.433 | 59.117 | -5.767 | 68.200 | 3.316 | PK |
| 4 | | 5470.000 | 62.117 | 58.705 | -6.083 | 68.200 | 3.411 | PK |
| 5 | | 5540.400 | 107.431 | 104.032 | N/A | N/A | 3.399 | PK |
| 6 | | 5725.000 | 58.008 | 53.320 | -10.192 | 68.200 | 4.688 | PK |
| 7 | | 5737.000 | 59.599 | 55.096 | -8.601 | 68.200 | 4.502 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

| | |
|---|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-09-05 |
| Limit: FCC_5G_RE(3m) | Engineer: Bob Zhang |
| Probe: BBHA9120D_1457_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz | |

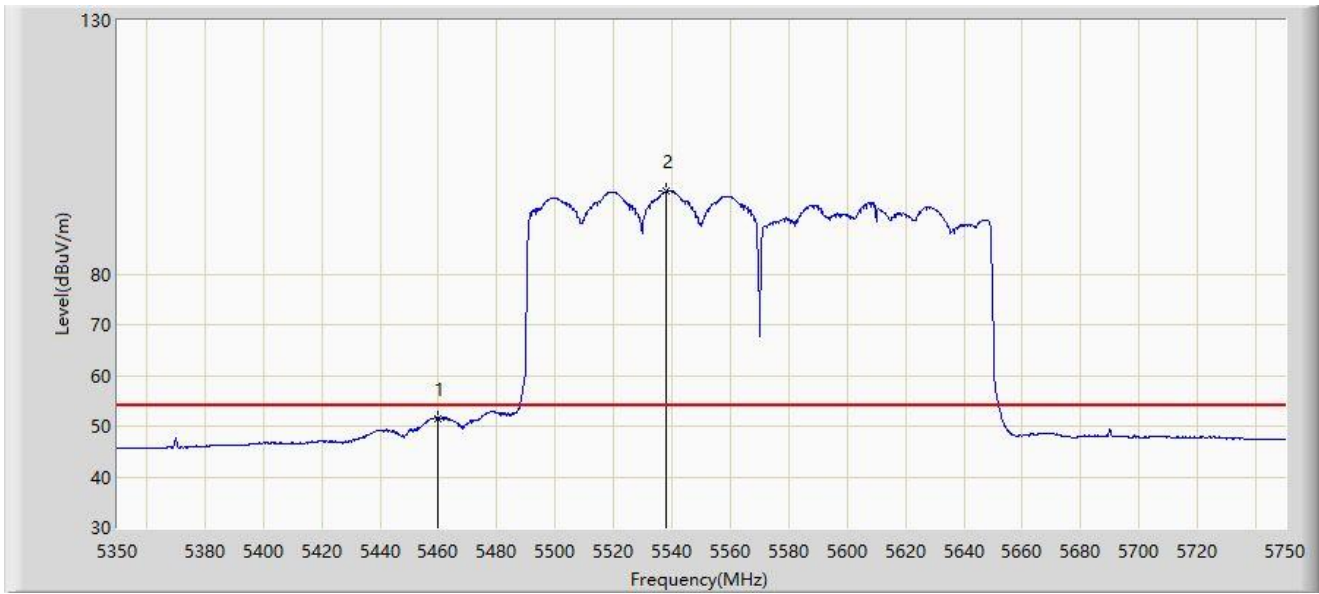

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 5460.000 | 51.560 | 48.341 | -2.440 | 54.000 | 3.219 | AV |
| 2 | | 5538.200 | 96.341 | 92.965 | N/A | N/A | 3.376 | AV |


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

| | |
|---|-----------------------|
| Site: WZ-SR2 | Test Date: 2023-09-25 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Linda Wei |
| Probe: ENV216_101683_Filter Off_C | Polarity: Line |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11a at 5180MHz | |

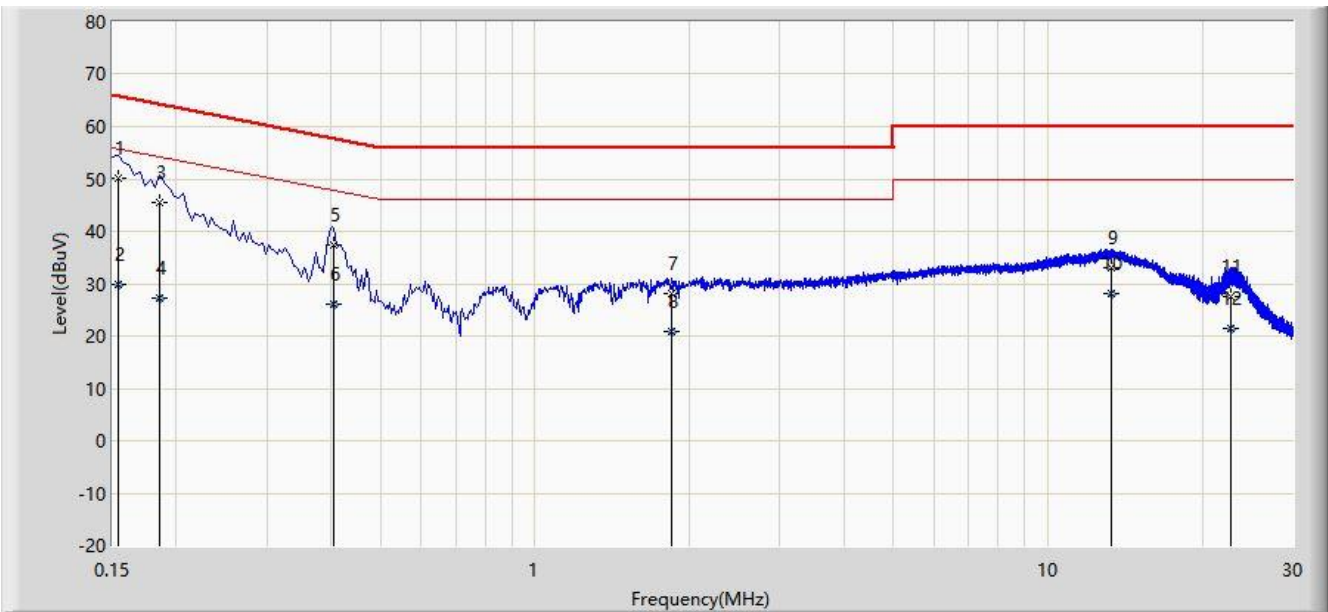


| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1 | * | 0.154 | 50.025 | 40.309 | -15.757 | 65.781 | 9.716 | QP |
| 2 | | 0.154 | 29.937 | 20.222 | -25.844 | 55.781 | 9.716 | AV |
| 3 | | 0.186 | 45.456 | 35.734 | -18.757 | 64.213 | 9.722 | QP |
| 4 | | 0.186 | 27.135 | 17.412 | -27.079 | 54.213 | 9.722 | AV |
| 5 | | 0.406 | 37.510 | 27.711 | -20.220 | 57.730 | 9.798 | QP |
| 6 | | 0.406 | 26.084 | 16.285 | -21.646 | 47.730 | 9.798 | AV |
| 7 | | 1.846 | 28.167 | 18.070 | -27.833 | 56.000 | 10.097 | QP |
| 8 | | 1.846 | 20.783 | 10.686 | -25.217 | 46.000 | 10.097 | AV |
| 9 | | 13.270 | 33.184 | 22.890 | -26.816 | 60.000 | 10.294 | QP |
| 10 | | 13.270 | 28.255 | 17.961 | -21.745 | 50.000 | 10.294 | AV |
| 11 | | 22.654 | 27.431 | 16.647 | -32.569 | 60.000 | 10.784 | QP |
| 12 | | 22.654 | 21.524 | 10.740 | -28.476 | 50.000 | 10.784 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

| | |
|---|-----------------------|
| Site: WZ-SR2 | Test Date: 2023-09-25 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Linda Wei |
| Probe: ENV216_101683_Filter Off_C | Polarity: Neutral |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11a at 5180MHz | |

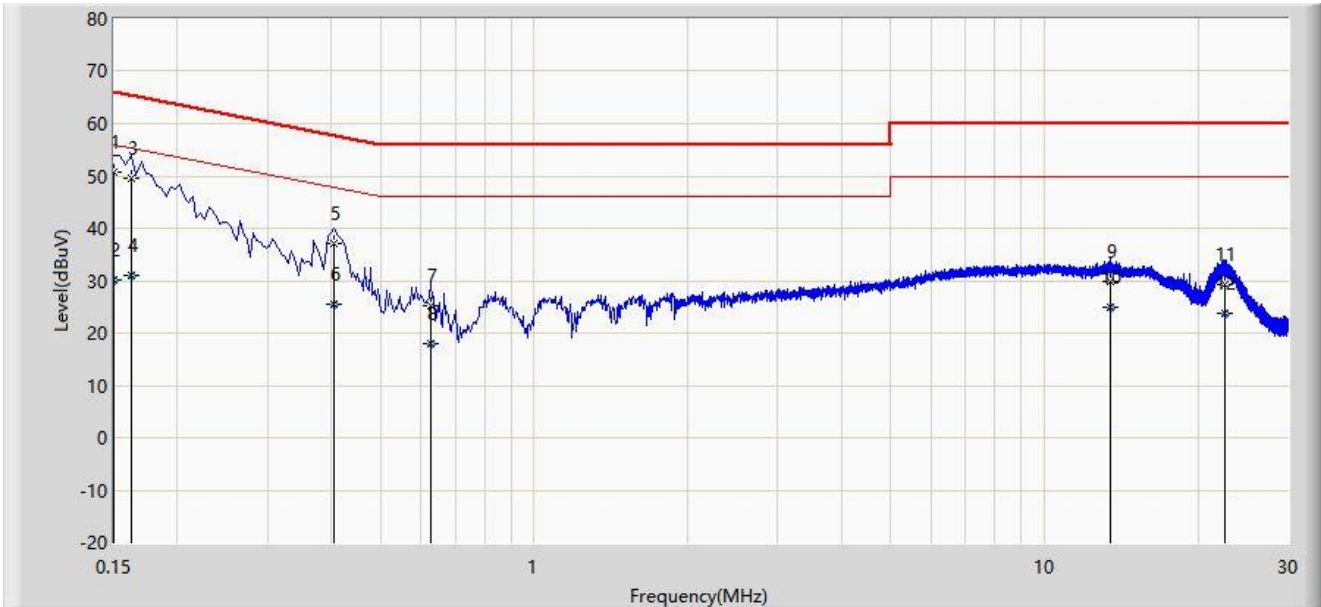

| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1 | * | 0.150 | 50.698 | 40.994 | -15.302 | 66.000 | 9.704 | QP |
| 2 | | 0.150 | 30.260 | 20.557 | -25.740 | 56.000 | 9.704 | AV |
| 3 | | 0.162 | 49.475 | 39.768 | -15.886 | 65.361 | 9.707 | QP |
| 4 | | 0.162 | 30.983 | 21.276 | -24.378 | 55.361 | 9.707 | AV |
| 5 | | 0.406 | 37.196 | 27.407 | -20.534 | 57.730 | 9.788 | QP |
| 6 | | 0.406 | 25.587 | 15.799 | -22.142 | 47.730 | 9.788 | AV |
| 7 | | 0.626 | 25.252 | 15.360 | -30.748 | 56.000 | 9.892 | QP |
| 8 | | 0.626 | 17.849 | 7.957 | -28.151 | 46.000 | 9.892 | AV |
| 9 | | 13.462 | 29.737 | 19.454 | -30.263 | 60.000 | 10.283 | QP |
| 10 | | 13.462 | 24.882 | 14.599 | -25.118 | 50.000 | 10.283 | AV |
| 11 | | 22.634 | 29.267 | 18.574 | -30.733 | 60.000 | 10.693 | QP |
| 12 | | 22.634 | 23.719 | 13.026 | -26.281 | 50.000 | 10.693 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2307RSU045-UT” file.

Appendix C – EUT Photograph

Refer to “2307RSU045-UE” file.

————— The End —————