


Note – M1: Injection of AWGN Signal, M2: Removal of AWGN Signal

**A.8 Radiated Spurious Emission Test Result**

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

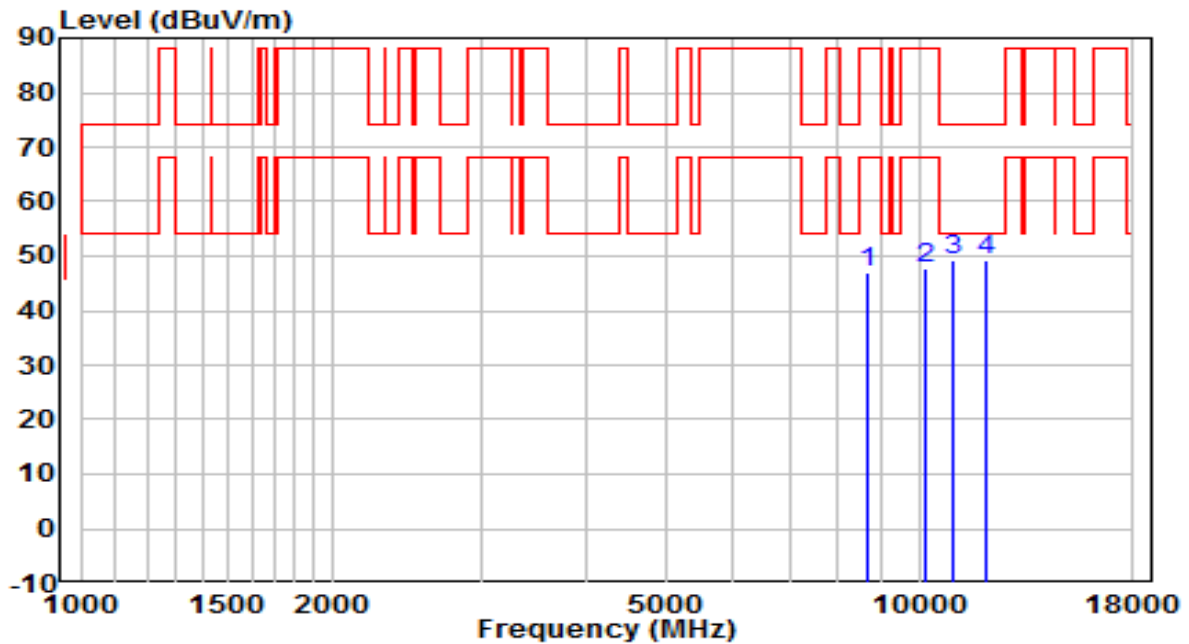


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8692.500	36.10	10.88	46.98	-41.22	88.20	Peak
2	10163.000	34.18	13.38	47.56	-40.64	88.20	Peak
3	10962.000	35.37	13.75	49.12	-24.88	74.00	Peak
4	* 12050.000	36.56	12.75	49.31	-24.69	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

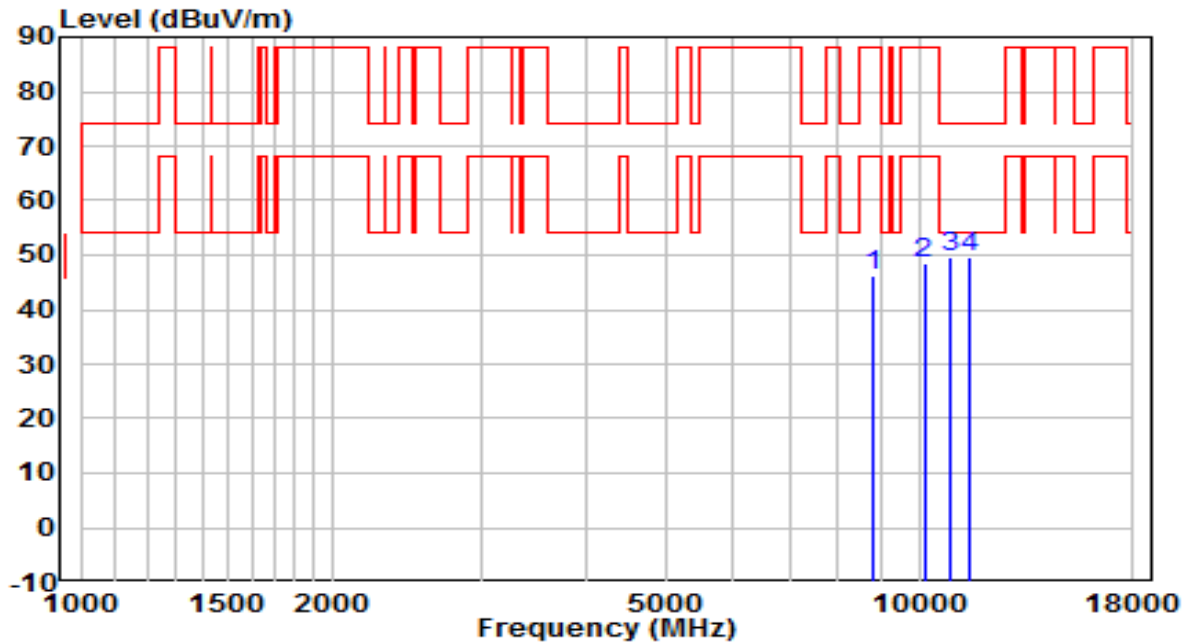


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8786.000	34.99	11.16	46.15	-42.05	88.20	Peak
2	10137.500	35.31	13.27	48.57	-39.63	88.20	Peak
3	* 10894.000	35.85	13.84	49.68	-24.32	74.00	Peak
4	11463.500	36.47	13.21	49.68	-24.32	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6195MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

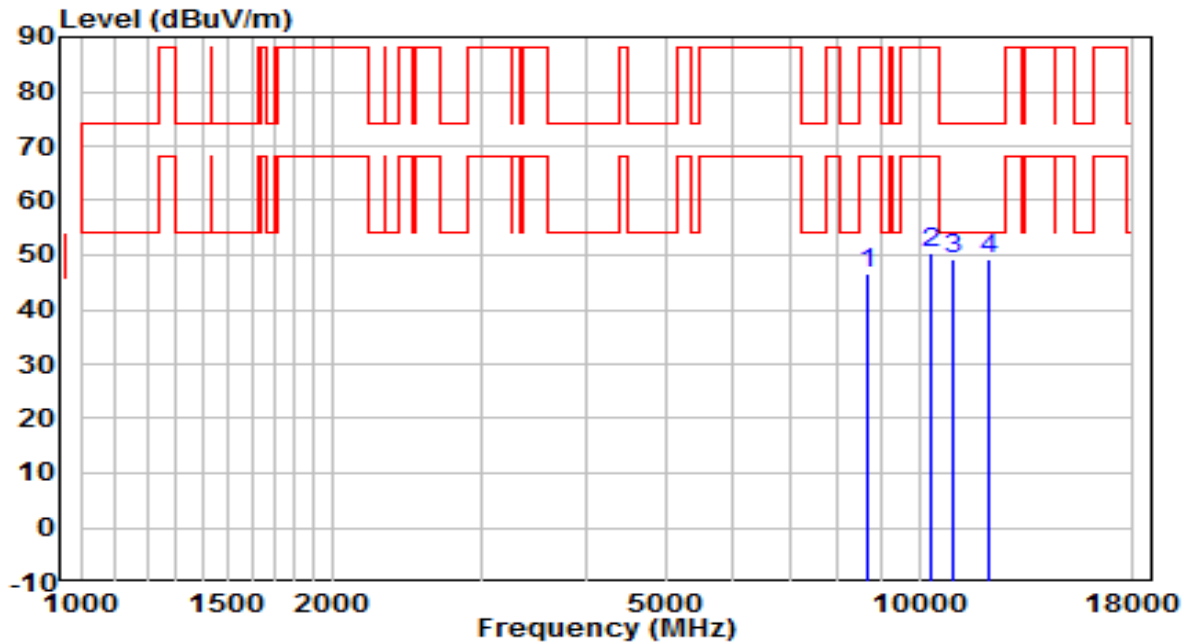


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8684.000	35.79	10.86	46.65	-41.55	88.20	Peak
2	10358.500	36.78	13.56	50.34	-37.86	88.20	Peak
3	* 10945.000	35.40	13.86	49.25	-24.75	74.00	Peak
4	12135.000	36.31	12.87	49.18	-24.82	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6195MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

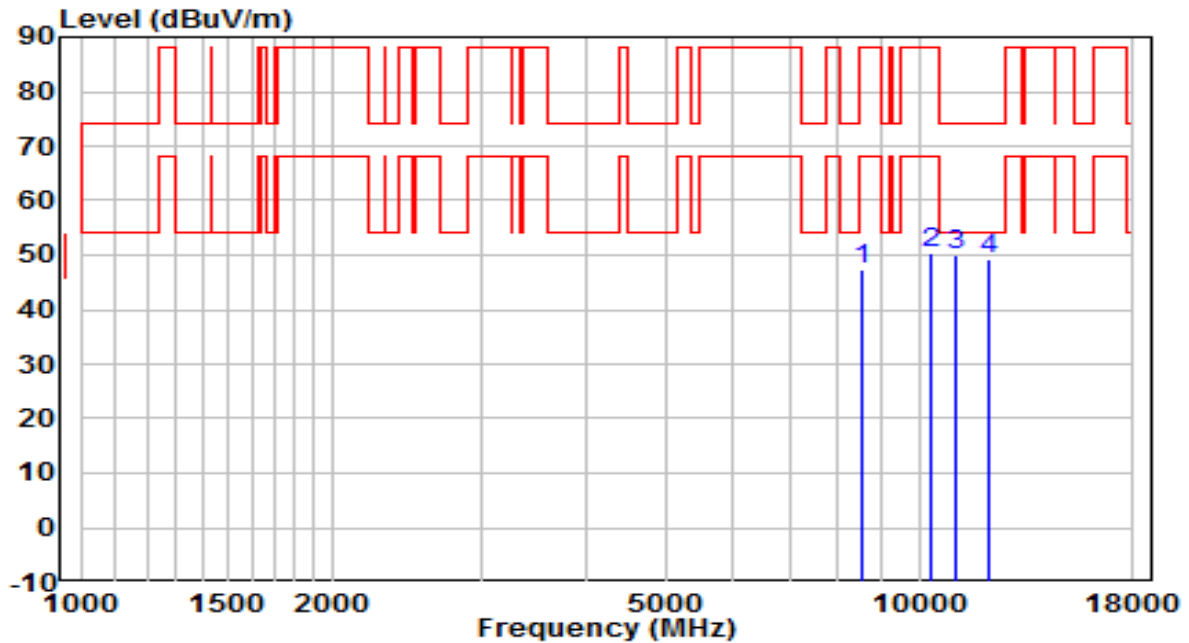


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8548.000	37.15	10.31	47.47	-40.73	88.20	Peak
2	10358.500	36.64	13.56	50.20	-38.00	88.20	Peak
3	* 11038.500	36.06	13.76	49.81	-24.19	74.00	Peak
4	12152.000	36.22	12.91	49.14	-24.86	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6415MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

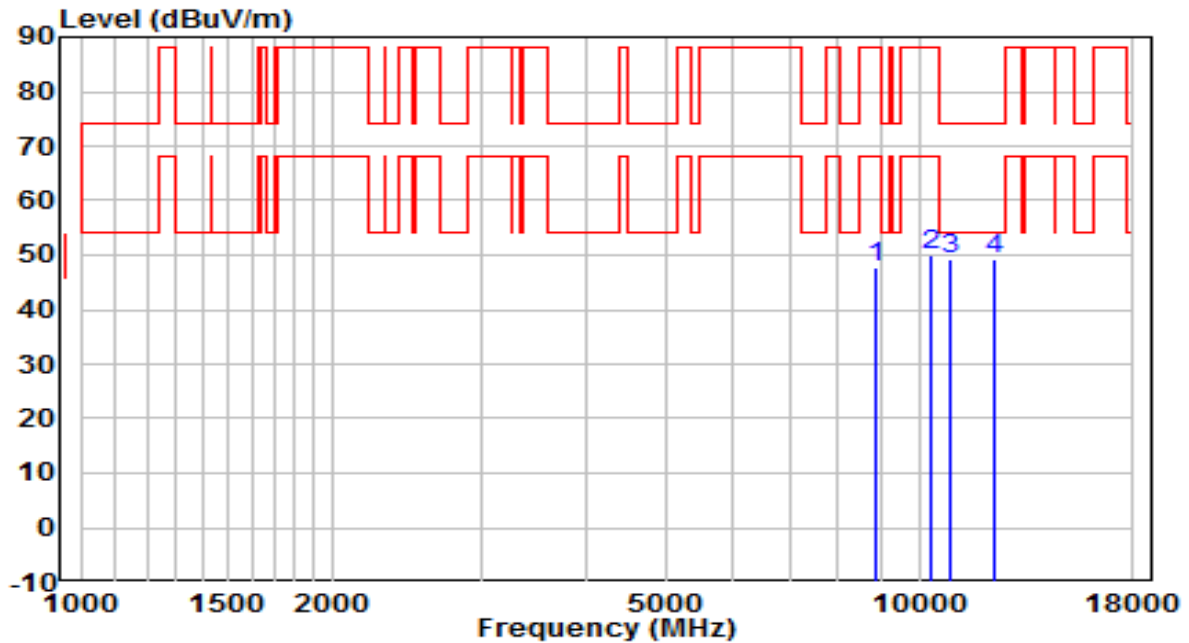


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8888.000	36.70	11.15	47.86	-40.34	88.20	Peak
2	10358.500	36.62	13.56	50.18	-38.02	88.20	Peak
3	* 10919.500	35.44	13.82	49.26	-24.74	74.00	Peak
4	12288.000	36.20	12.89	49.09	-24.91	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6415MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

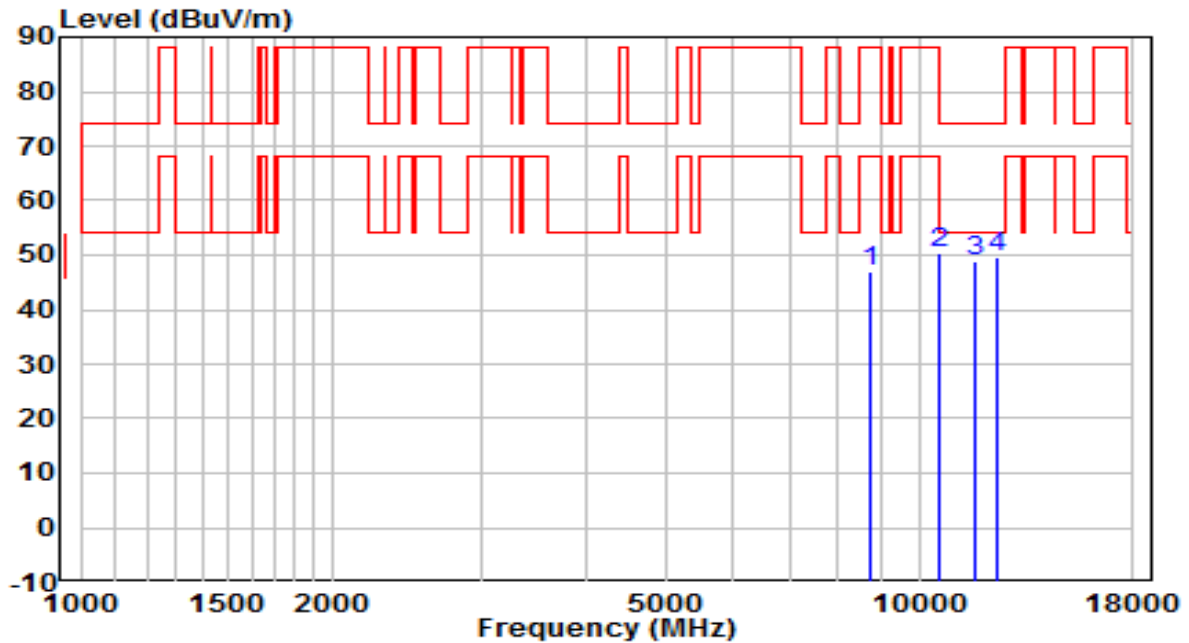


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8743.500	36.21	10.95	47.16	-41.04	88.20	Peak
2	10579.500	36.08	14.21	50.30	-37.90	88.20	Peak
3	11633.500	36.05	12.90	48.95	-25.05	74.00	Peak
4	* 12407.000	36.83	12.70	49.53	-24.47	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6435MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

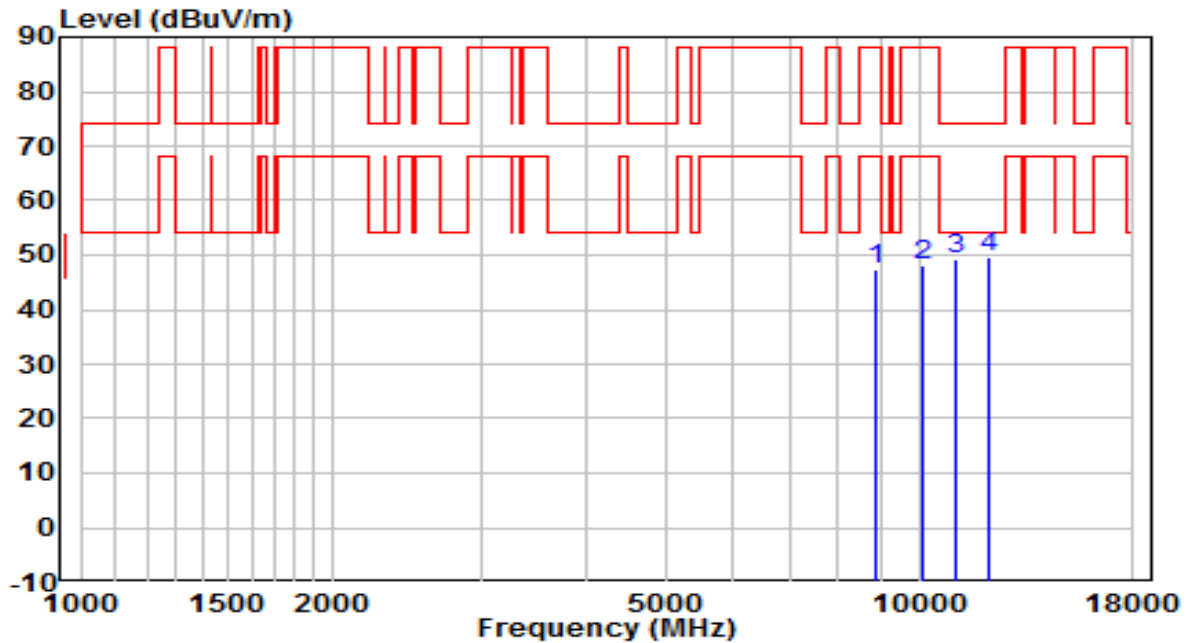


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8862.500	36.03	11.35	47.38	-40.82	88.20	Peak
2	10095.000	35.12	12.98	48.10	-40.10	88.20	Peak
3	11098.000	35.63	13.52	49.15	-24.85	74.00	Peak
4	* 12075.500	36.72	12.89	49.61	-24.39	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6435MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

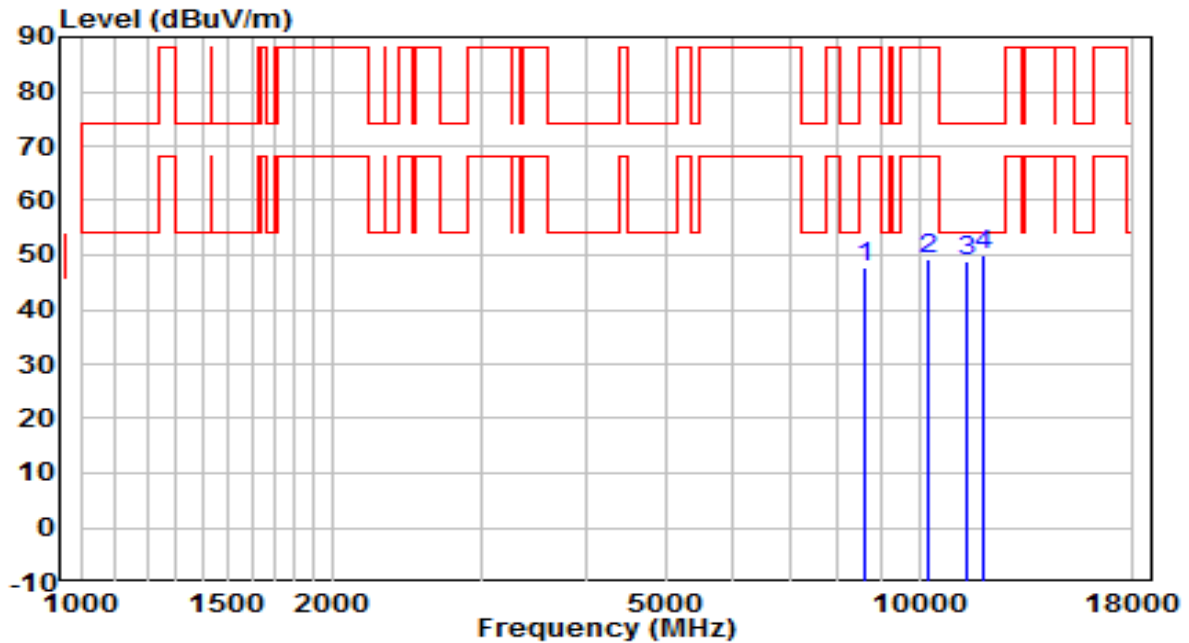


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8607.500	37.16	10.56	47.73	-40.47	88.20	Peak
2	10282.000	35.80	13.46	49.27	-38.93	88.20	Peak
3	11370.000	35.74	13.27	49.02	-24.98	74.00	Peak
4	* 11948.000	37.36	12.70	50.06	-23.94	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6475MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

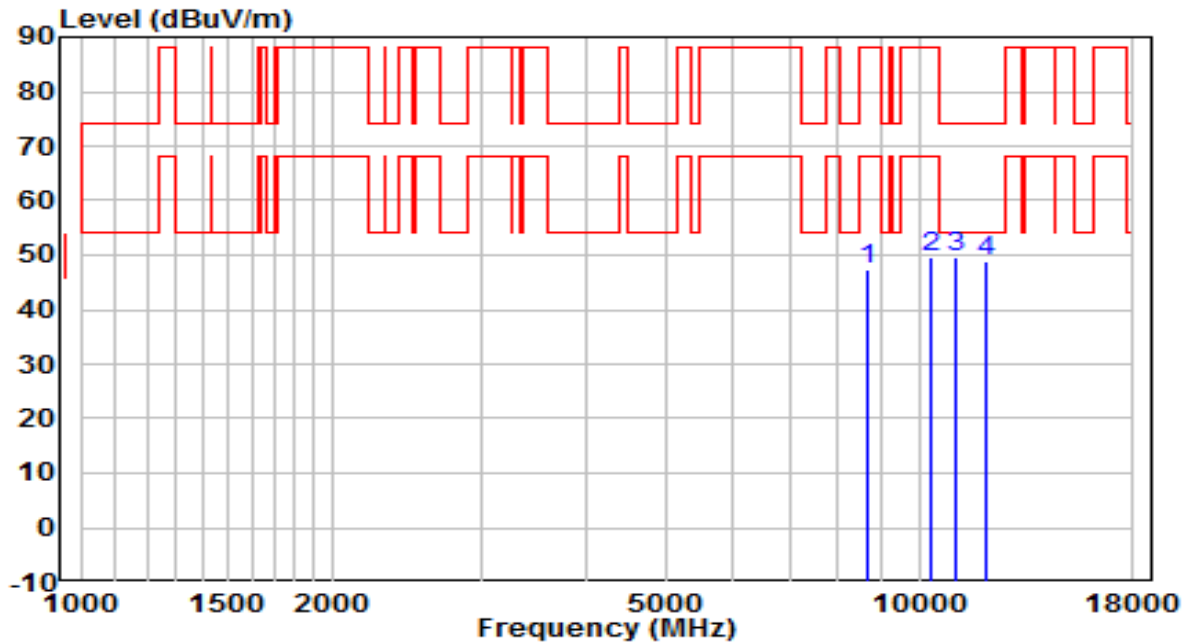


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8709.500	36.24	11.02	47.26	-40.94	88.20	Peak
2	10358.500	36.15	13.56	49.71	-38.49	88.20	Peak
3	* 11089.500	35.97	13.62	49.58	-24.42	74.00	Peak
4	12058.500	36.08	12.78	48.87	-25.13	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6475MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

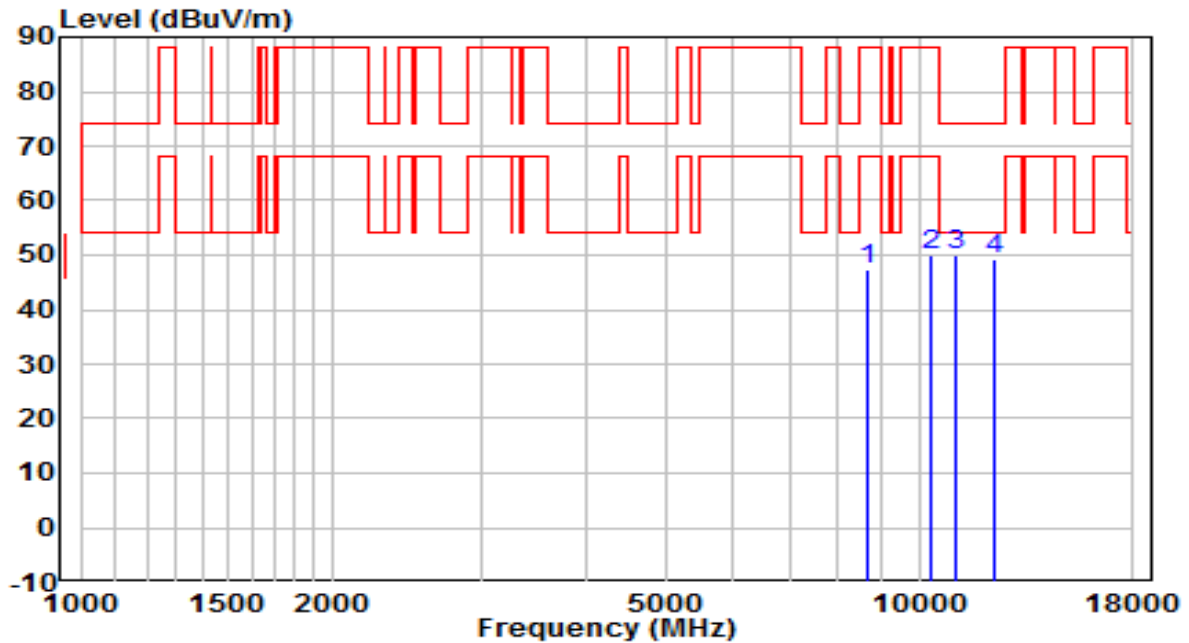


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8709.500	36.24	11.02	47.26	-40.94	88.20	Peak
2	10358.500	36.59	13.56	50.15	-38.05	88.20	Peak
3	* 11098.000	36.50	13.52	50.02	-23.98	74.00	Peak
4	12262.500	36.44	12.80	49.24	-24.76	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6515MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

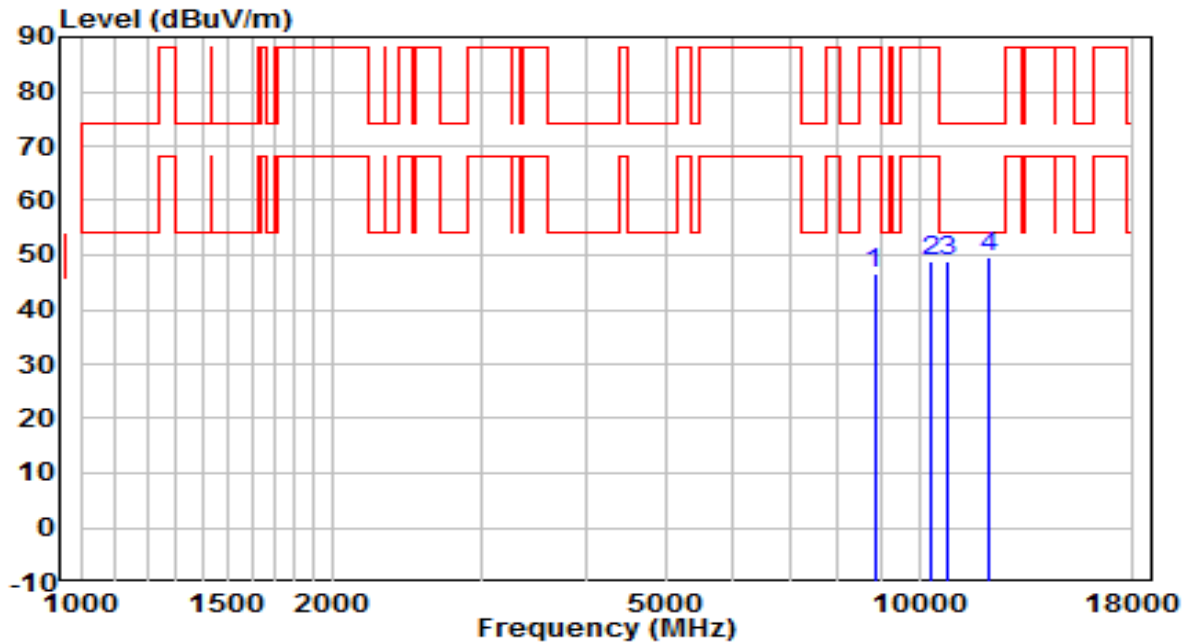


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8845.500	35.51	11.20	46.71	-41.49	88.20	Peak
2	10358.500	35.31	13.56	48.87	-39.33	88.20	Peak
3	10834.500	35.08	13.91	48.98	-25.02	74.00	Peak
4	* 12101.000	36.62	12.86	49.48	-24.52	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6515MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

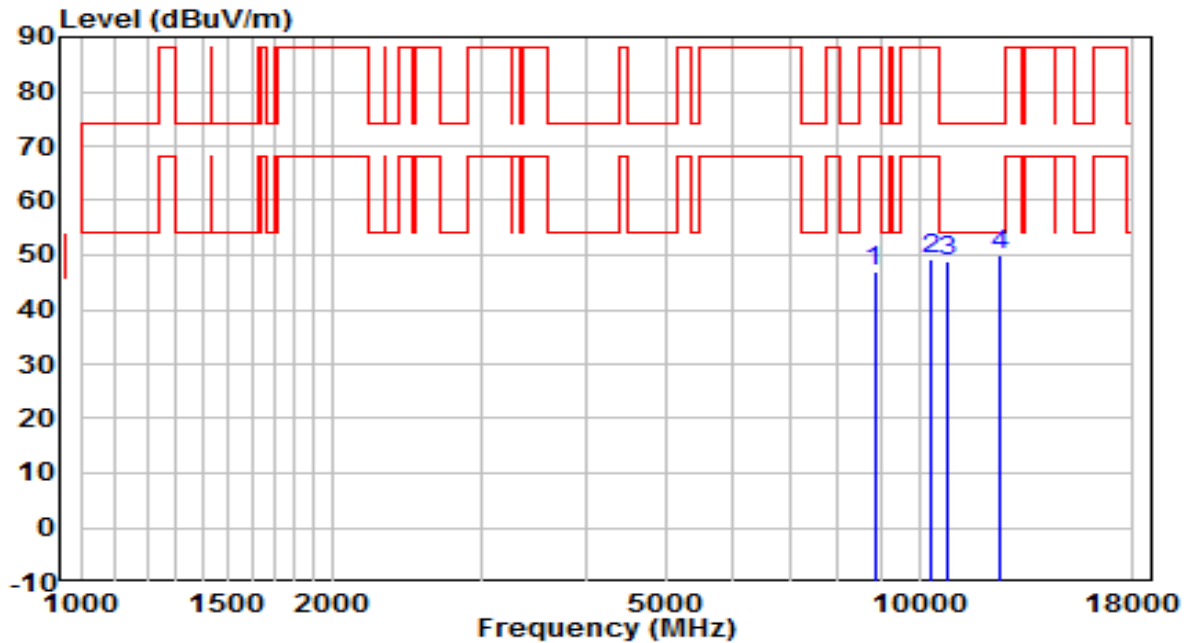


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8845.500	35.94	11.20	47.14	-41.06	88.20	Peak
2	10358.500	35.71	13.56	49.27	-38.93	88.20	Peak
3	10809.000	34.94	13.91	48.85	-25.15	74.00	Peak
4	* 12526.000	37.00	12.85	49.85	-24.15	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6535MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

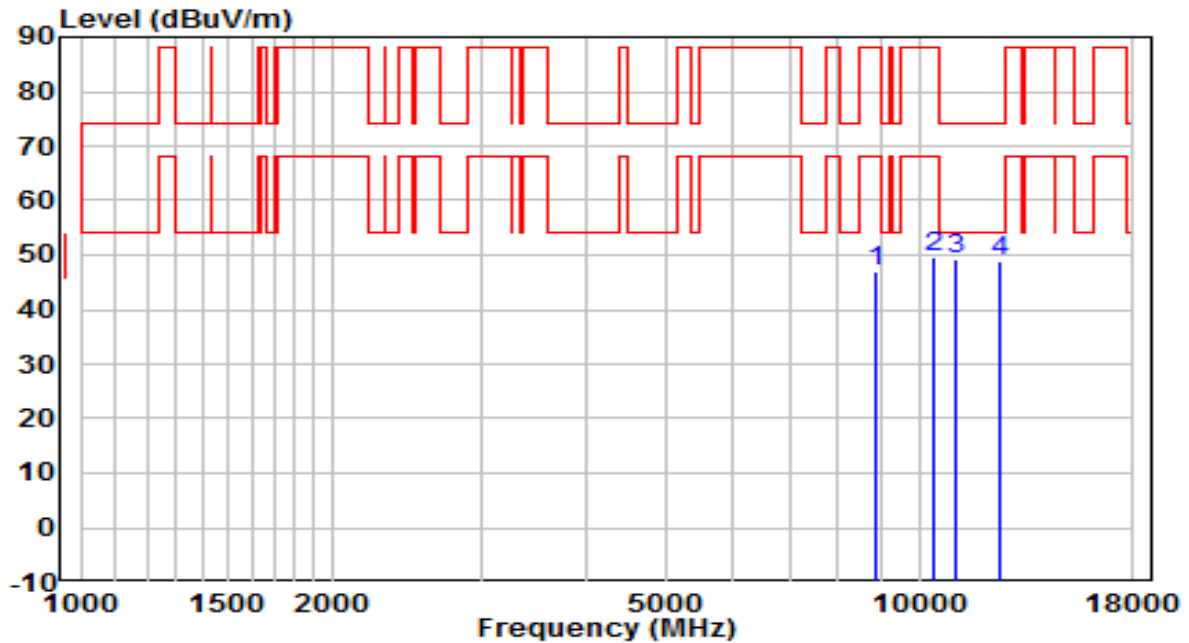


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8871.000	35.54	11.42	46.96	-41.24	88.20	Peak
2	10443.500	36.13	13.63	49.76	-38.44	88.20	Peak
3	* 11072.500	35.70	13.70	49.40	-24.60	74.00	Peak
4	12449.500	35.97	12.75	48.72	-25.28	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6535MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

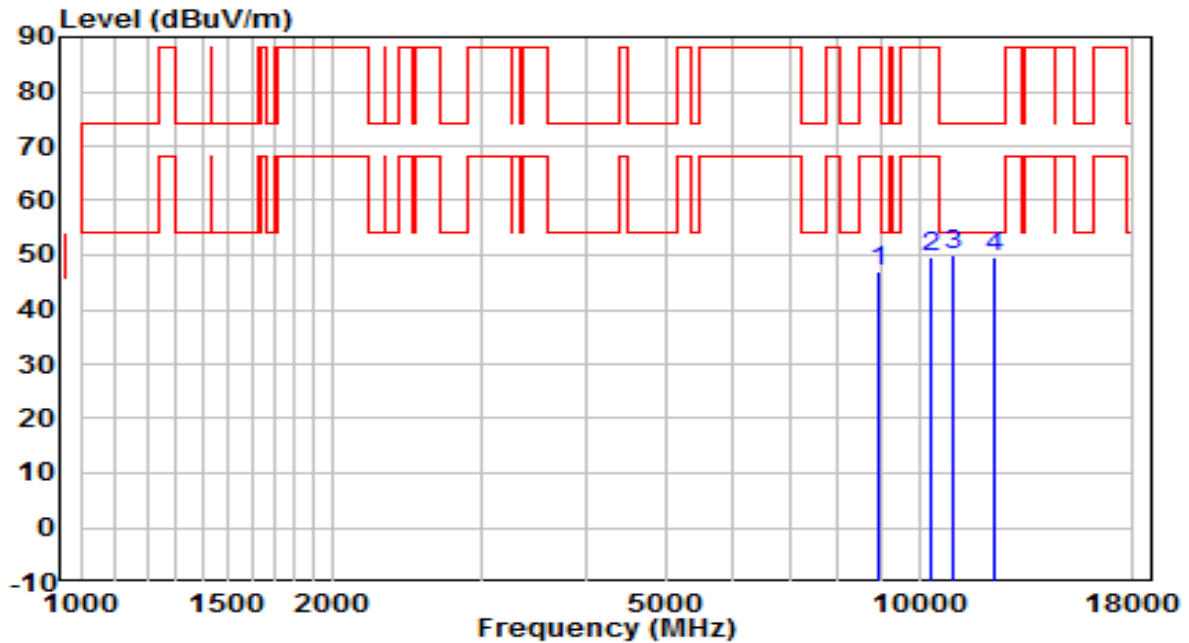


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8913.500	35.82	11.26	47.08	-41.12	88.20	Peak
2	10358.500	35.99	13.56	49.55	-38.65	88.20	Peak
3	* 10996.000	36.06	13.78	49.84	-24.16	74.00	Peak
4	12279.500	36.93	12.81	49.74	-24.26	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6715MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

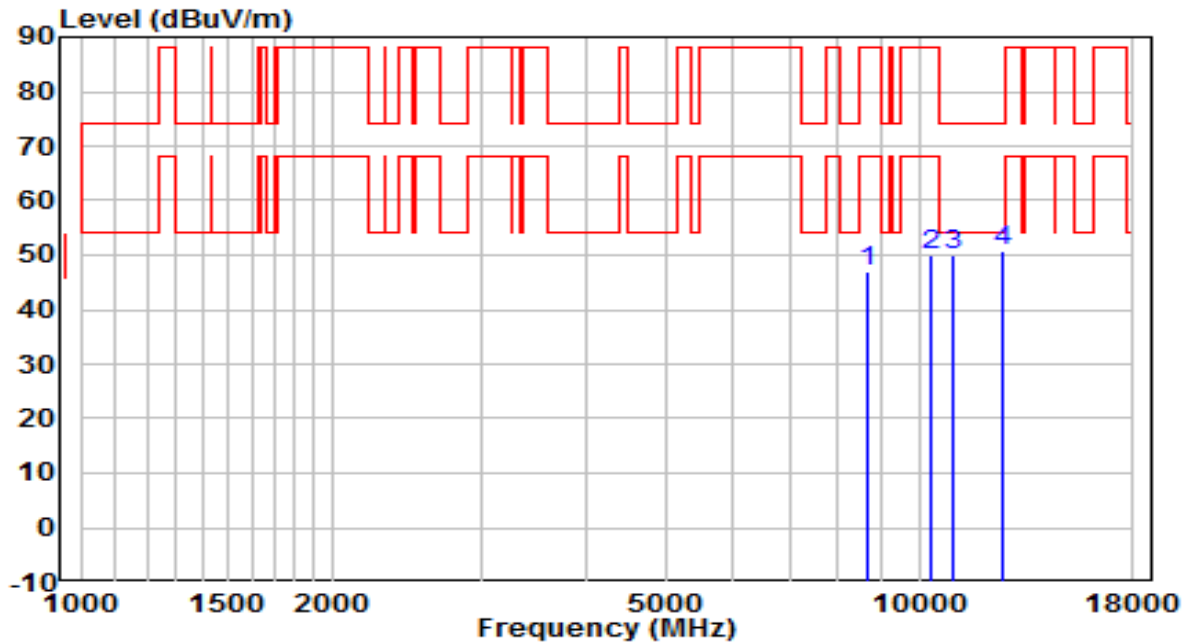


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8667.000	36.22	10.77	46.99	-41.21	88.20	Peak
2	10358.500	36.35	13.56	49.92	-38.28	88.20	Peak
3	10936.500	36.12	13.91	50.04	-23.96	74.00	Peak
4	* 12551.500	37.62	12.97	50.59	-23.41	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6715MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

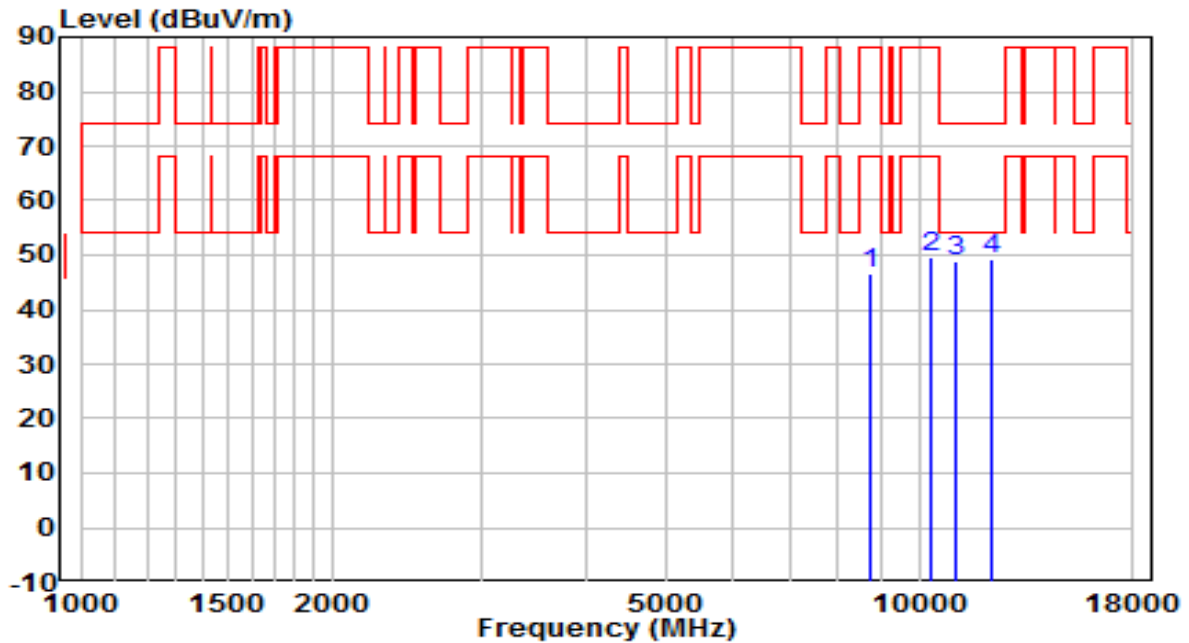


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8735.000	35.81	10.93	46.74	-41.46	88.20	Peak
2	10358.500	36.12	13.56	49.69	-38.51	88.20	Peak
3	11072.500	35.32	13.70	49.02	-24.98	74.00	Peak
4	* 12203.000	36.09	12.99	49.08	-24.92	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6855MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

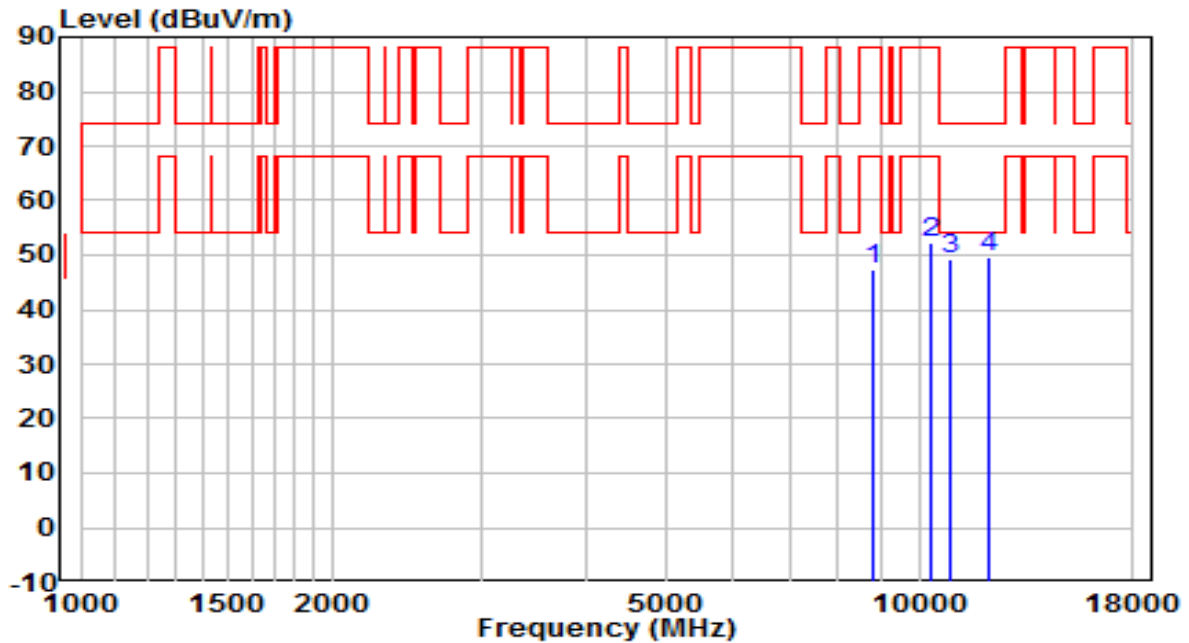


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8828.500	36.23	11.15	47.38	-40.82	88.20	Peak
2	10358.500	38.56	13.56	52.12	-36.08	88.20	Peak
3	10877.000	35.30	13.91	49.21	-24.79	74.00	Peak
4	* 12092.500	36.55	12.95	49.50	-24.50	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6855MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

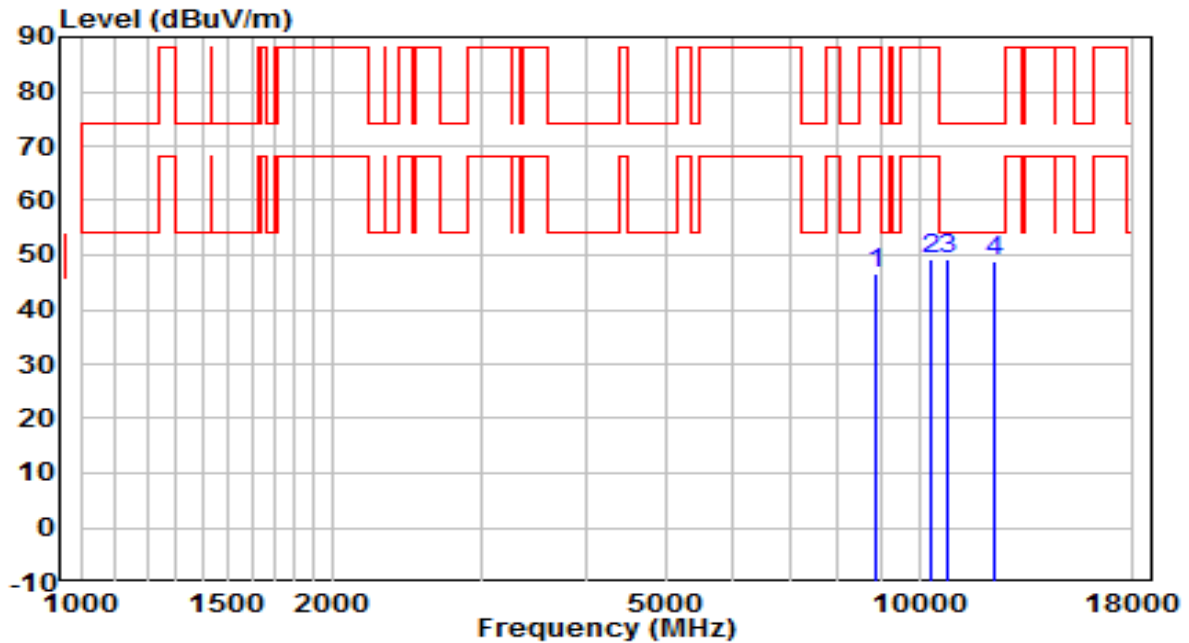


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8862.500	35.31	11.35	46.66	-41.54	88.20	Peak
2	10358.500	35.79	13.56	49.35	-38.85	88.20	Peak
3	* 10826.000	35.19	13.92	49.11	-24.89	74.00	Peak
4	12339.000	36.10	12.77	48.87	-25.13	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6875MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

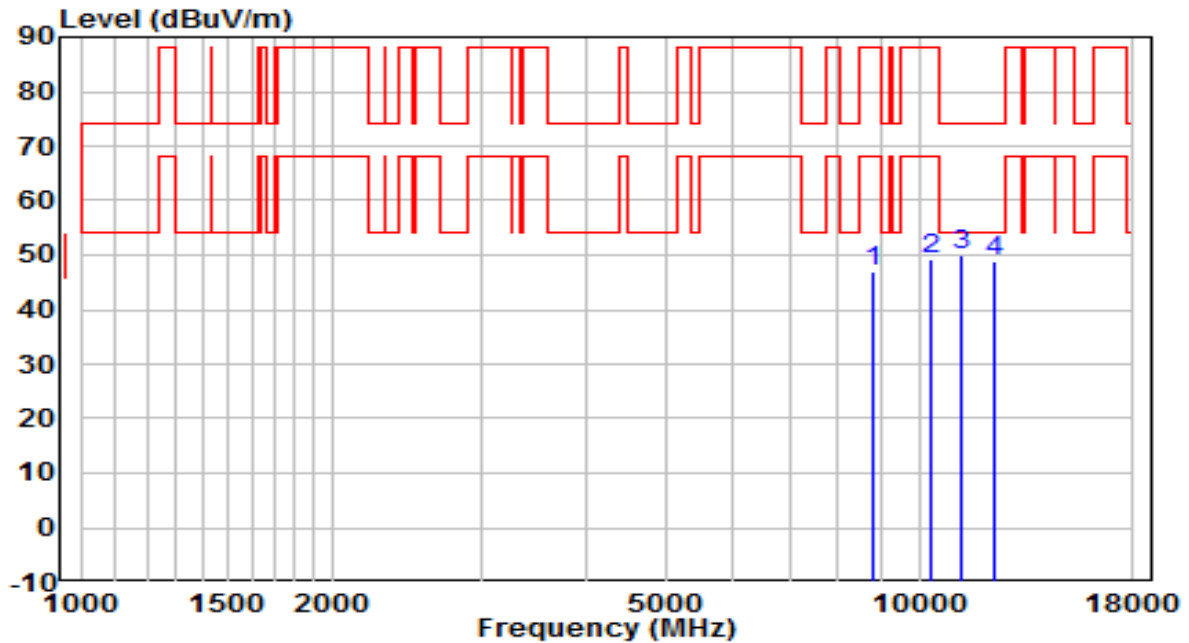


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8811.500	35.75	11.20	46.95	-41.25	88.20	Peak
2	10358.500	35.80	13.56	49.37	-38.83	88.20	Peak
3	* 11242.500	36.55	13.36	49.91	-24.09	74.00	Peak
4	12296.500	36.07	12.91	48.98	-25.02	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6875MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

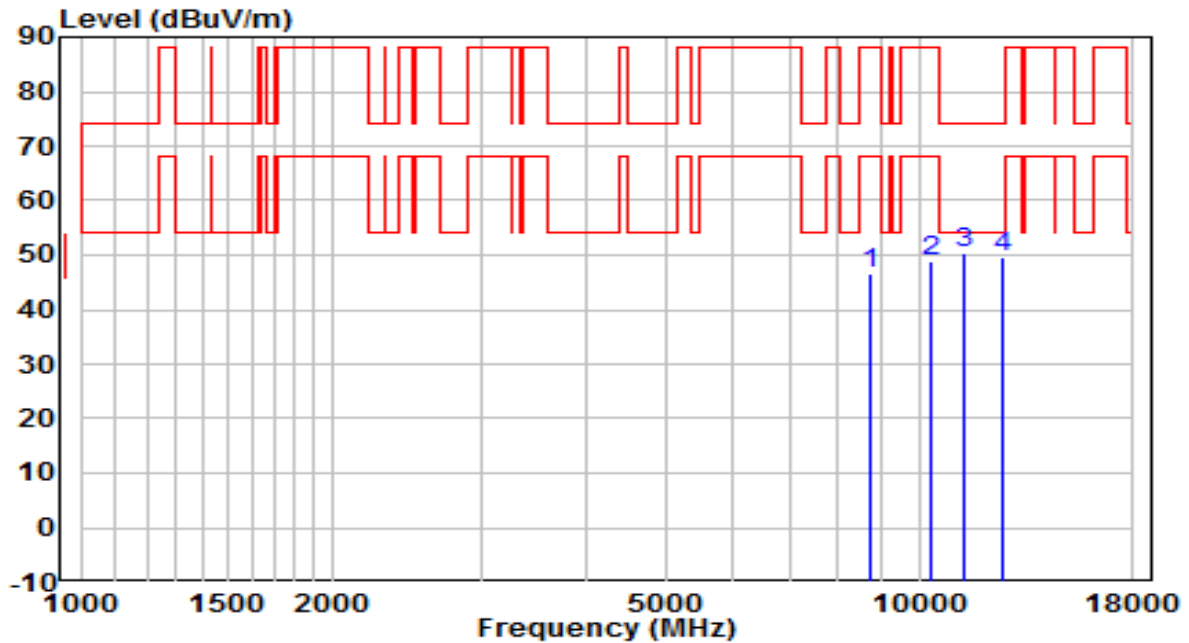


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8726.500	35.62	10.95	46.57	-41.63	88.20	Peak
2	10358.500	35.49	13.56	49.06	-39.14	88.20	Peak
3	* 11310.500	36.82	13.37	50.20	-23.80	74.00	Peak
4	12534.500	36.83	12.89	49.73	-24.27	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6895MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

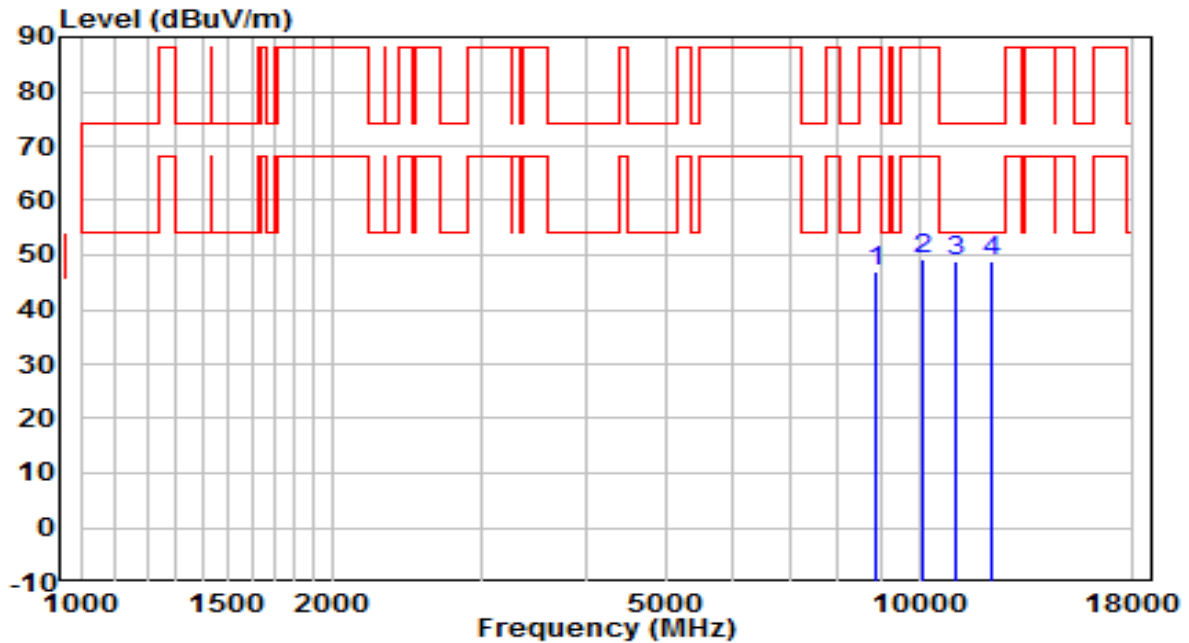


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8888.000	35.96	11.15	47.12	-41.08	88.20	Peak
2	10129.000	36.06	13.30	49.36	-38.84	88.20	Peak
3	* 11064.000	35.14	13.69	48.83	-25.17	74.00	Peak
4	12169.000	35.93	12.85	48.78	-25.22	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6895MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

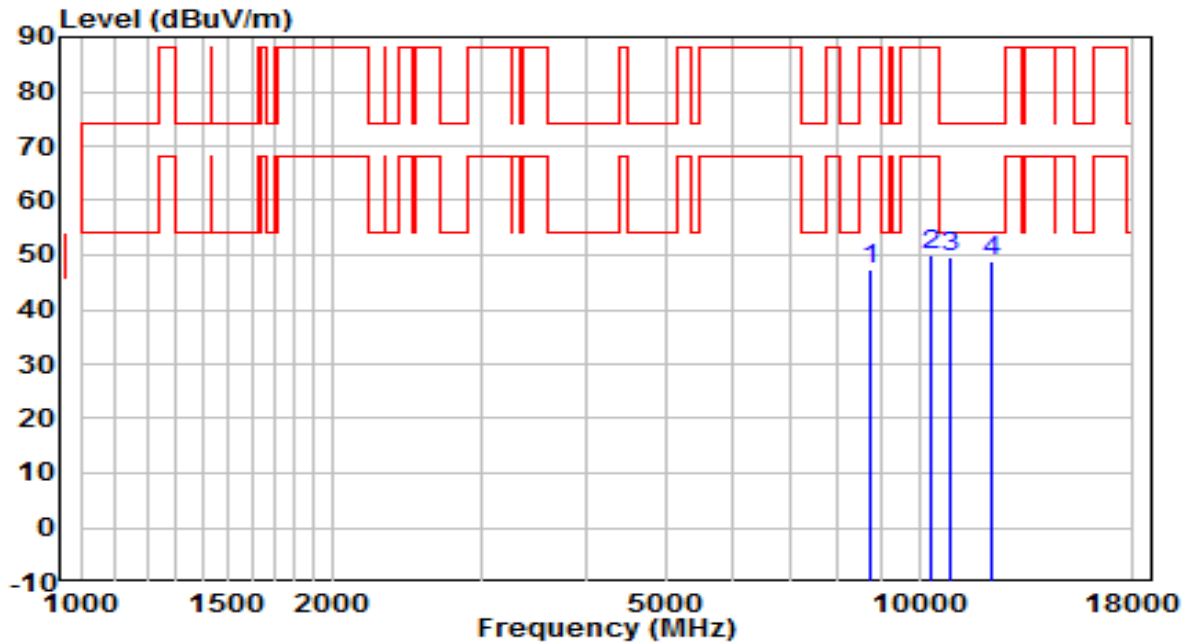


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8760.500	36.25	11.15	47.40	-40.80	88.20	Peak
2	10358.500	36.55	13.56	50.12	-38.08	88.20	Peak
3	* 10885.500	35.60	13.90	49.49	-24.51	74.00	Peak
4	12228.500	36.07	12.95	49.02	-24.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7015MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

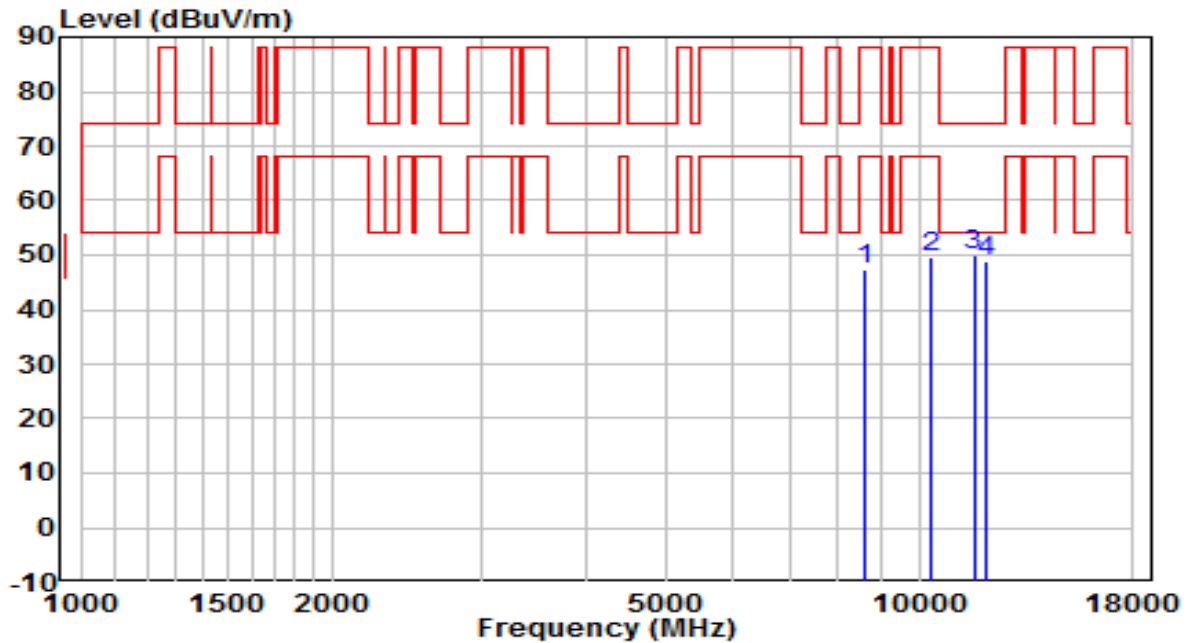


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8599.000	36.71	10.50	47.21	-40.99	88.20	Peak
2	10350.000	36.23	13.57	49.80	-38.40	88.20	Peak
3	* 11616.500	37.02	12.81	49.83	-24.17	74.00	Peak
4	12024.500	36.25	12.66	48.91	-25.09	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7015MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

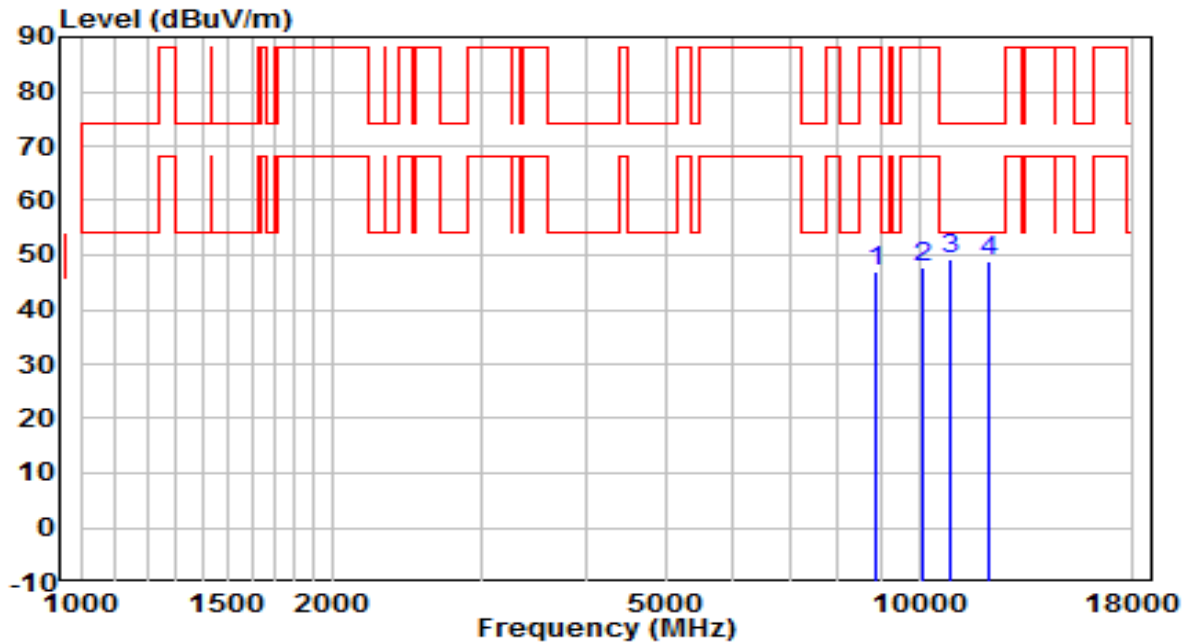


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8862.500	35.64	11.35	46.99	-41.21	88.20	Peak
2	10078.000	34.48	13.32	47.79	-40.41	88.20	Peak
3	* 10877.000	35.52	13.91	49.43	-24.57	74.00	Peak
4	12143.500	35.92	12.94	48.86	-25.14	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

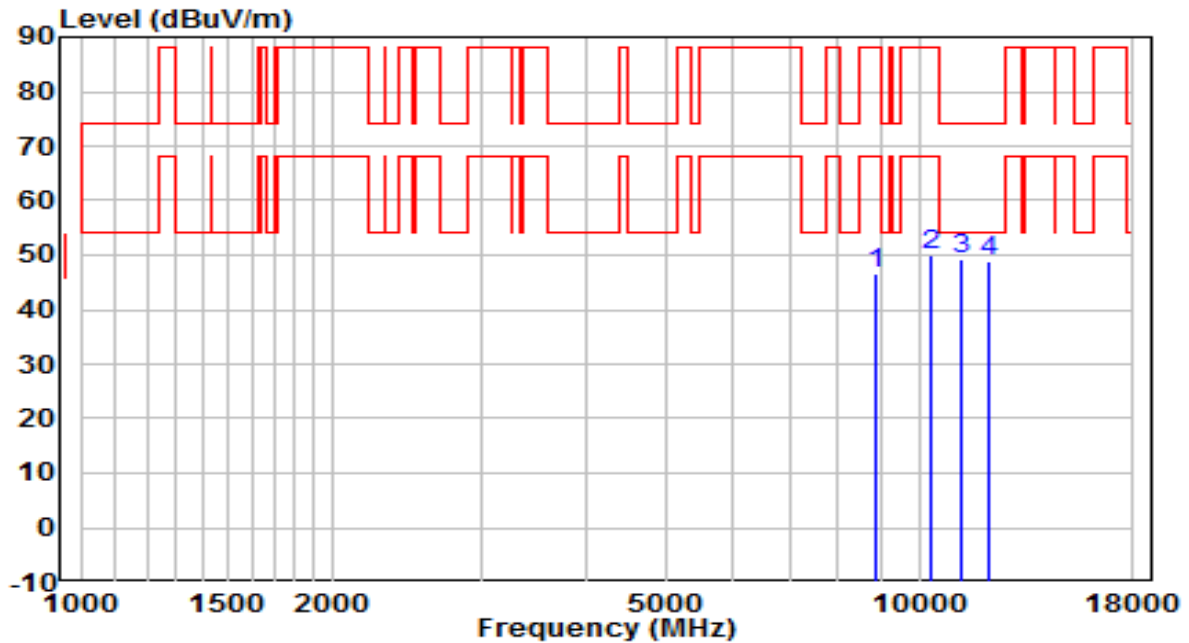


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8854.000	35.17	11.28	46.45	-41.75	88.20	Peak
2	10358.500	36.59	13.56	50.16	-38.04	88.20	Peak
3	* 11242.500	35.75	13.36	49.11	-24.89	74.00	Peak
4	12143.500	36.11	12.94	49.05	-24.95	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

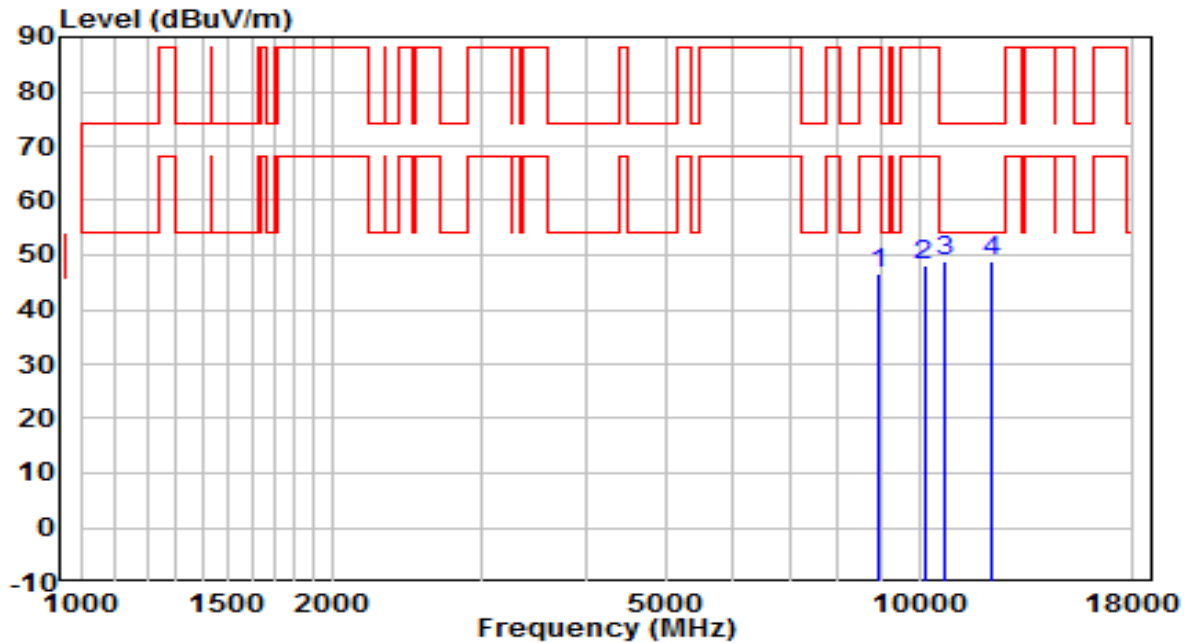


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8913.500	35.35	11.26	46.61	-41.59	88.20	Peak
2	10137.500	35.03	13.27	48.30	-39.90	88.20	Peak
3	* 10741.000	35.24	13.66	48.90	-25.10	74.00	Peak
4	12203.000	35.81	12.99	48.80	-25.20	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

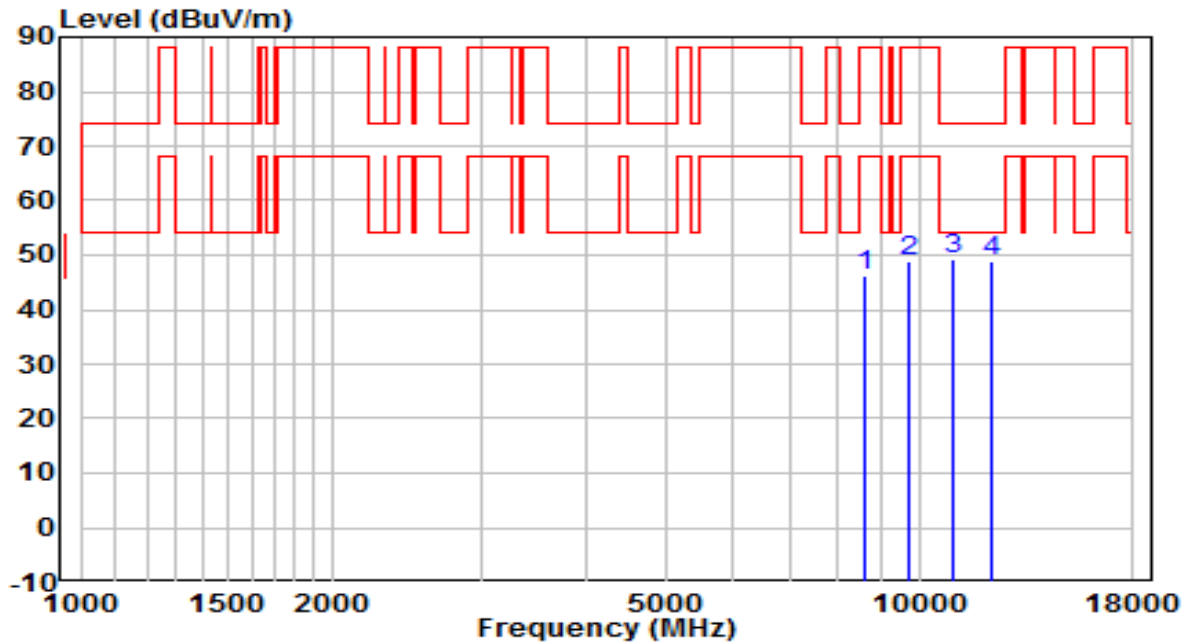


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8641.500	35.73	10.66	46.39	-41.81	88.20	Peak
2	9746.500	36.42	12.58	49.00	-39.20	88.20	Peak
3	* 10936.500	35.49	13.91	49.41	-24.59	74.00	Peak
4	12160.500	36.04	12.84	48.88	-25.12	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

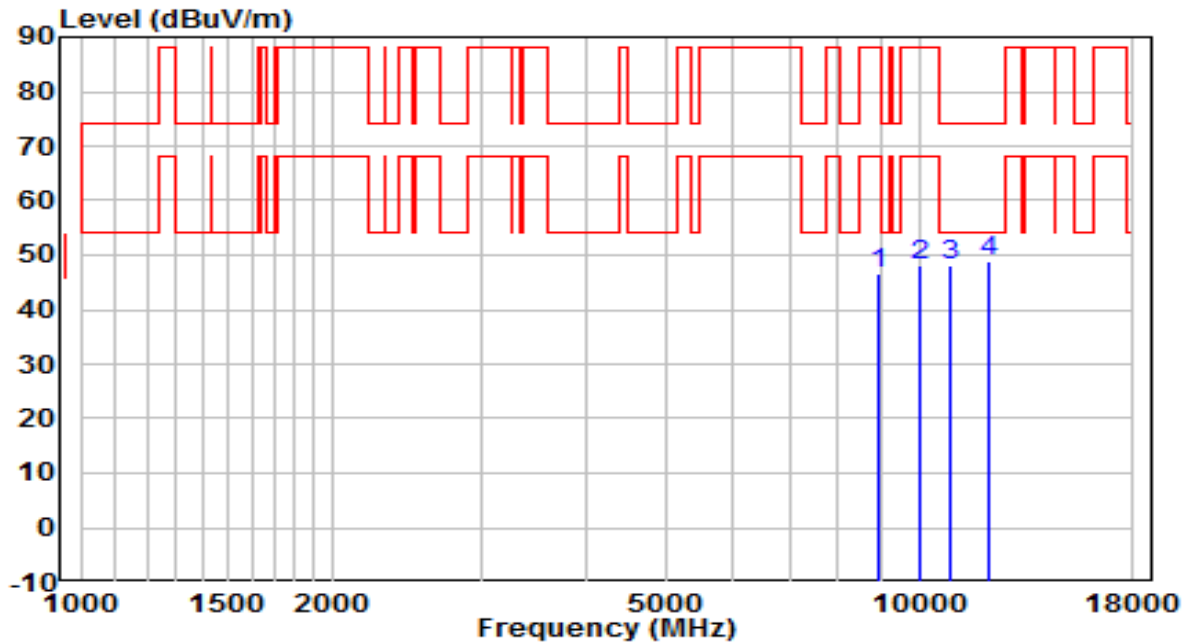


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8922.000	35.32	11.34	46.66	-41.54	88.20	Peak
2	10035.500	35.05	12.95	48.00	-40.20	88.20	Peak
3	10928.000	34.39	13.88	48.27	-25.73	74.00	Peak
4	* 12152.000	35.94	12.91	48.85	-25.15	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6205MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

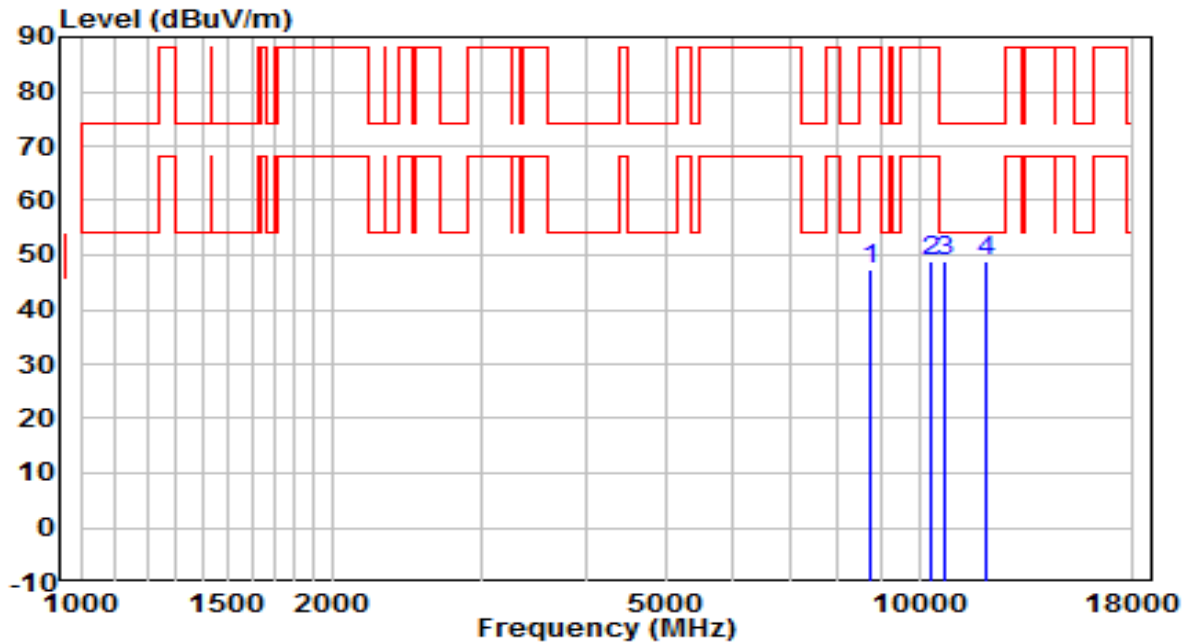


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8726.500	36.28	10.95	47.23	-40.97	88.20	Peak
2	10358.500	35.46	13.56	49.02	-39.18	88.20	Peak
3	* 10741.000	35.37	13.66	49.03	-24.97	74.00	Peak
4	12050.000	36.28	12.75	49.02	-24.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6205MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

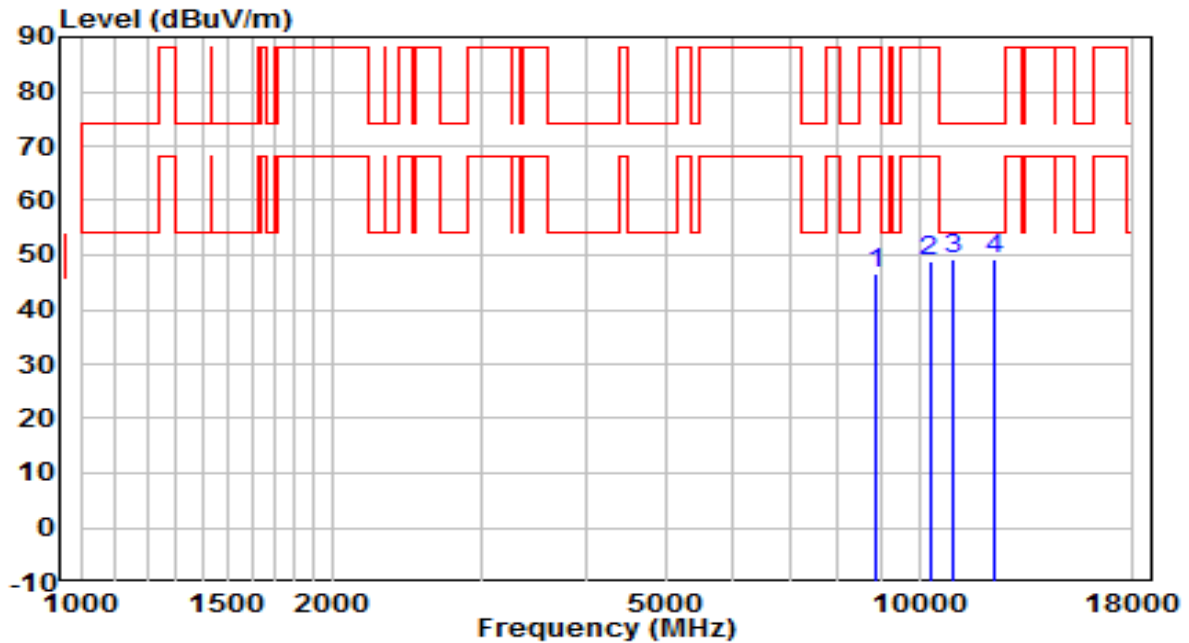


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8879.500	35.33	11.29	46.62	-41.58	88.20	Peak
2	10290.500	35.21	13.54	48.74	-39.46	88.20	Peak
3	10996.000	35.33	13.78	49.11	-24.89	74.00	Peak
4	* 12262.500	36.34	12.80	49.13	-24.87	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6405MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

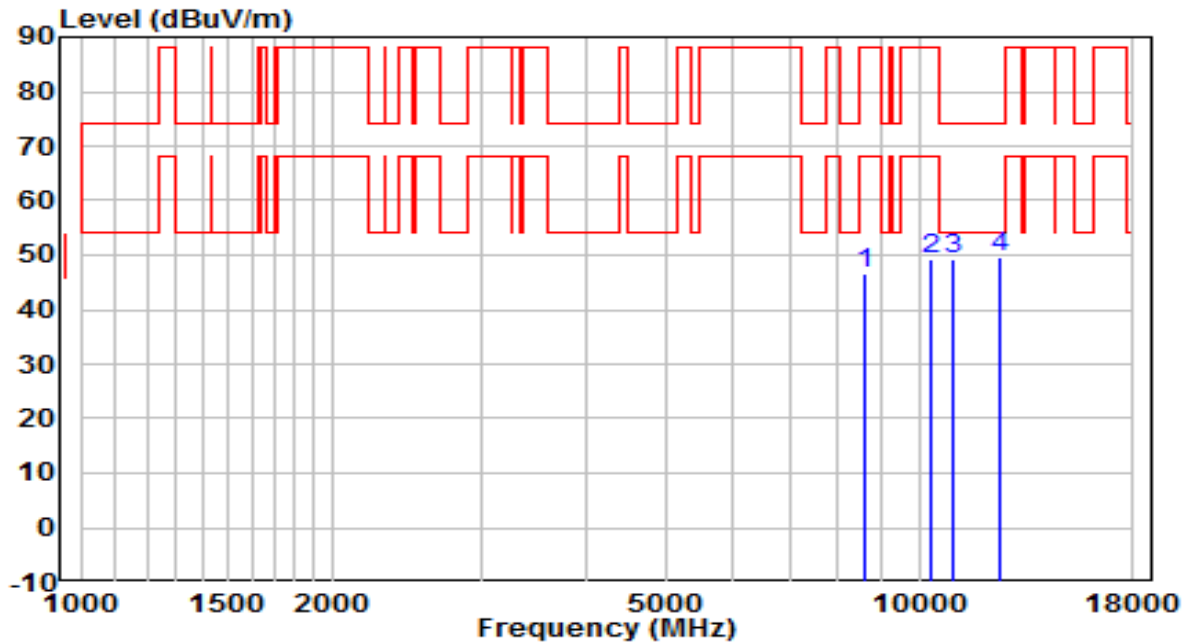


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8641.500	35.77	10.66	46.44	-41.76	88.20	Peak
2	10358.500	35.72	13.56	49.28	-38.92	88.20	Peak
3	10936.500	35.35	13.91	49.26	-24.74	74.00	Peak
4	* 12475.000	37.08	12.61	49.69	-24.31	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6405MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

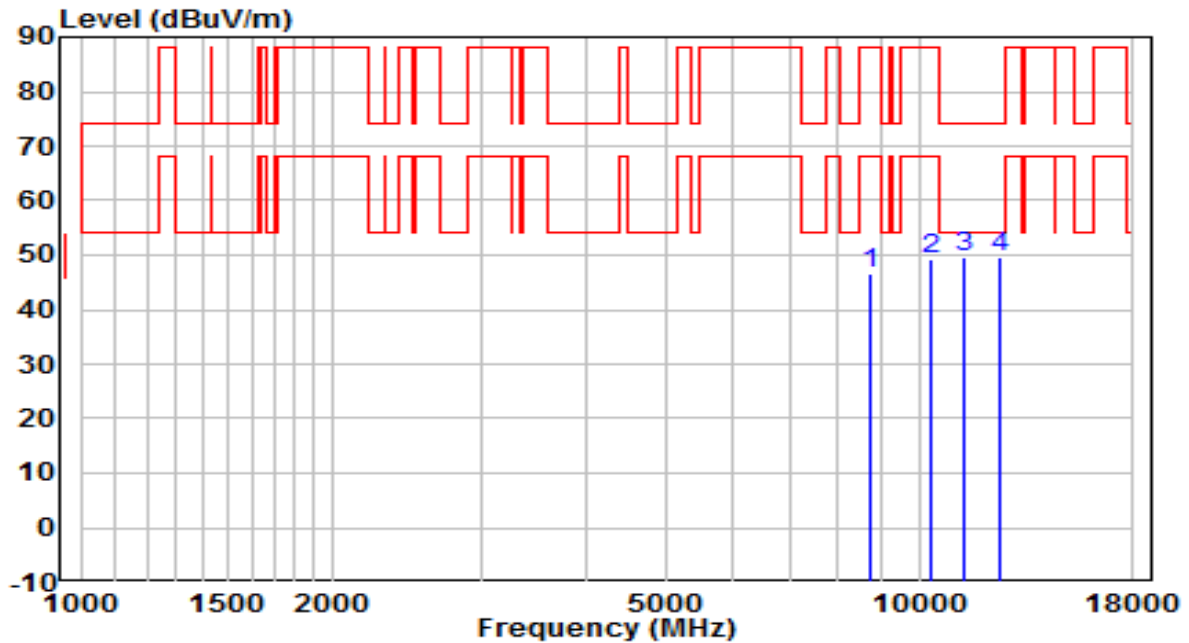


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8752.000	35.68	11.02	46.70	-41.50	88.20	Peak
2	10350.000	35.65	13.57	49.22	-38.98	88.20	Peak
3	* 11310.500	36.43	13.37	49.80	-24.20	74.00	Peak
4	12509.000	36.61	12.91	49.52	-24.48	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6445MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

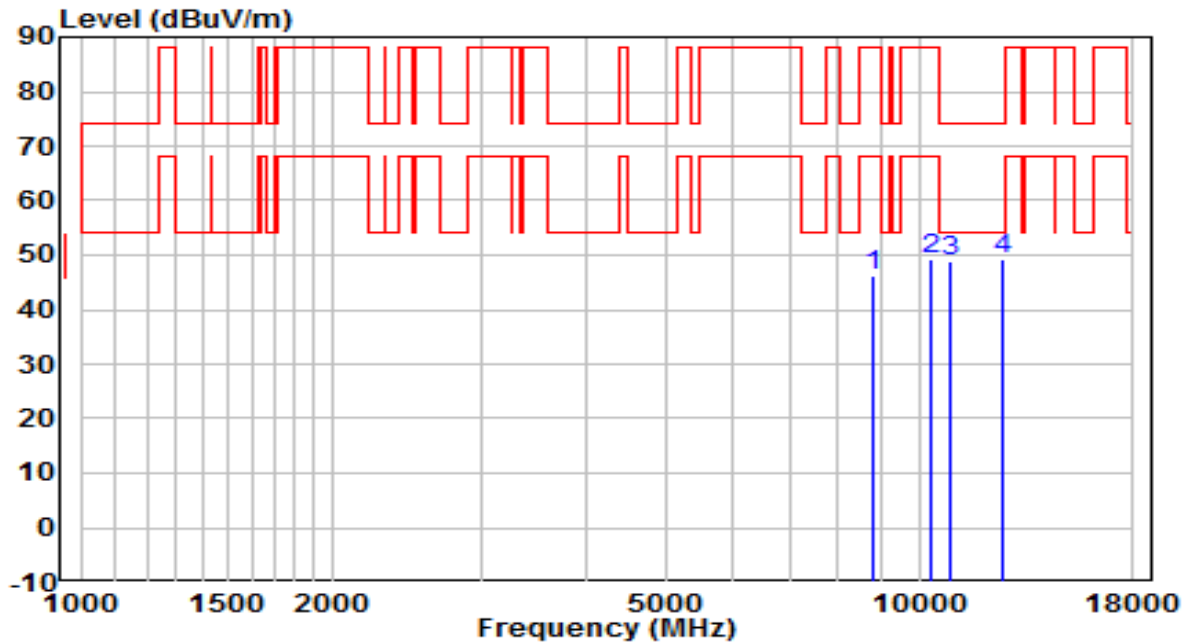


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8820.000	35.21	11.19	46.40	-41.80	88.20	Peak
2	10299.000	35.62	13.47	49.09	-39.11	88.20	Peak
3	10928.000	34.83	13.88	48.71	-25.29	74.00	Peak
4	* 12568.500	36.15	12.93	49.08	-24.92	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6445MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

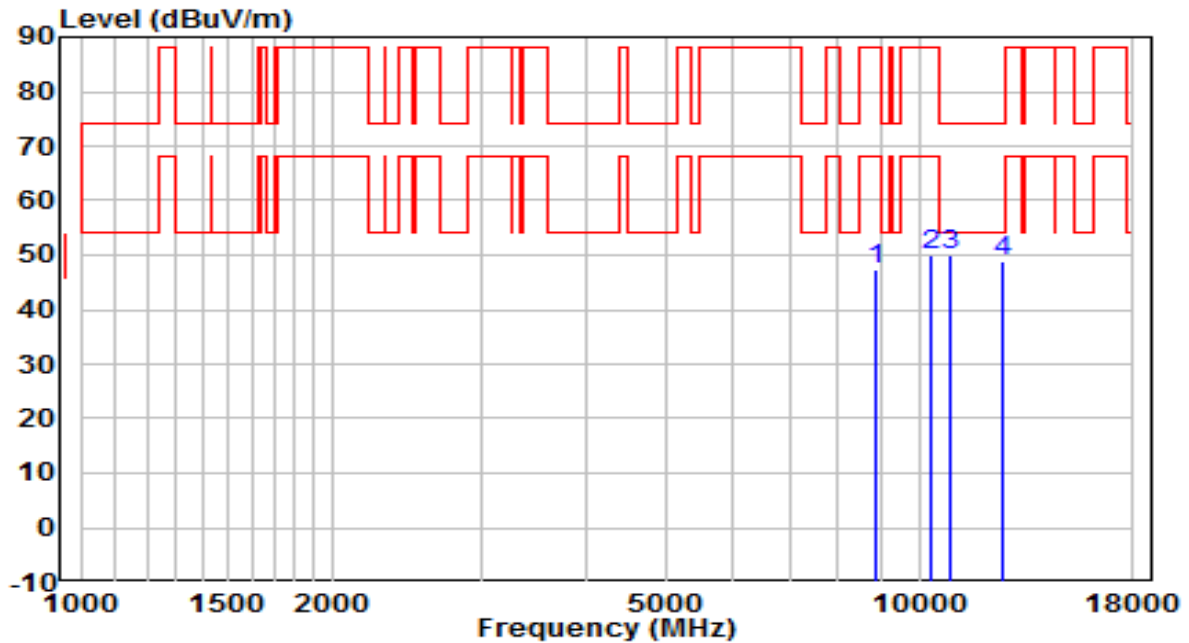


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8871.000	35.89	11.42	47.30	-40.90	88.20	Peak
2	10358.500	36.29	13.56	49.86	-38.34	88.20	Peak
3	* 10894.000	36.08	13.84	49.92	-24.08	74.00	Peak
4	12585.500	35.95	13.00	48.96	-25.04	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6485MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

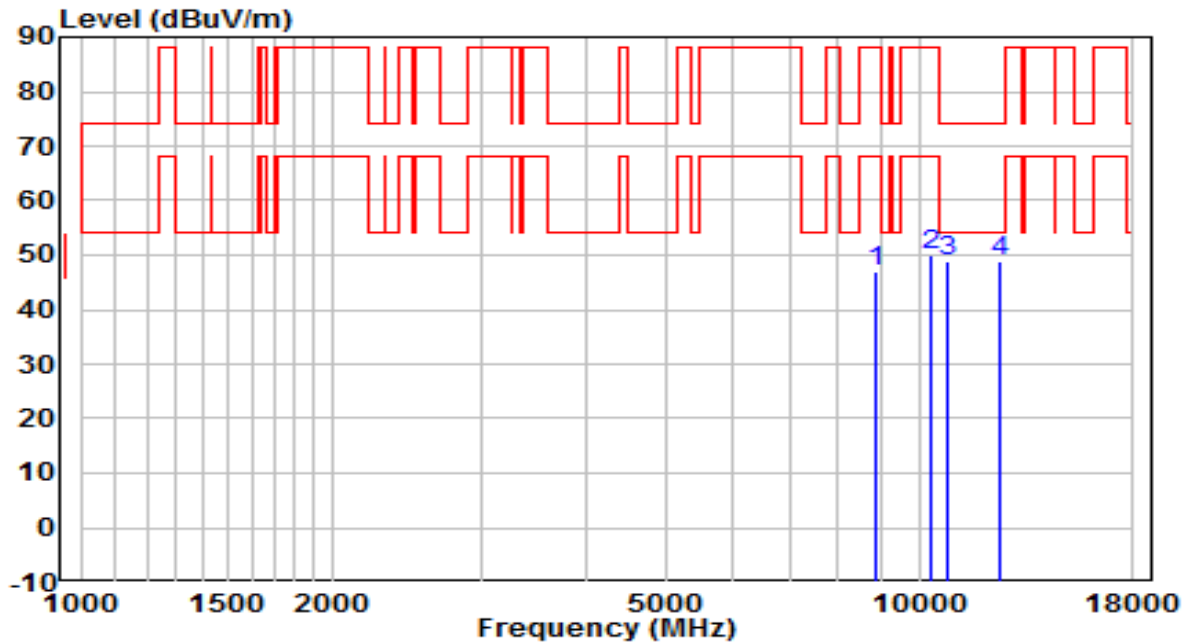


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8879.500	35.75	11.29	47.04	-41.16	88.20	Peak
2	10358.500	36.33	13.56	49.90	-38.30	88.20	Peak
3	* 10809.000	34.87	13.91	48.78	-25.22	74.00	Peak
4	12458.000	36.08	12.67	48.75	-25.25	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6485MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

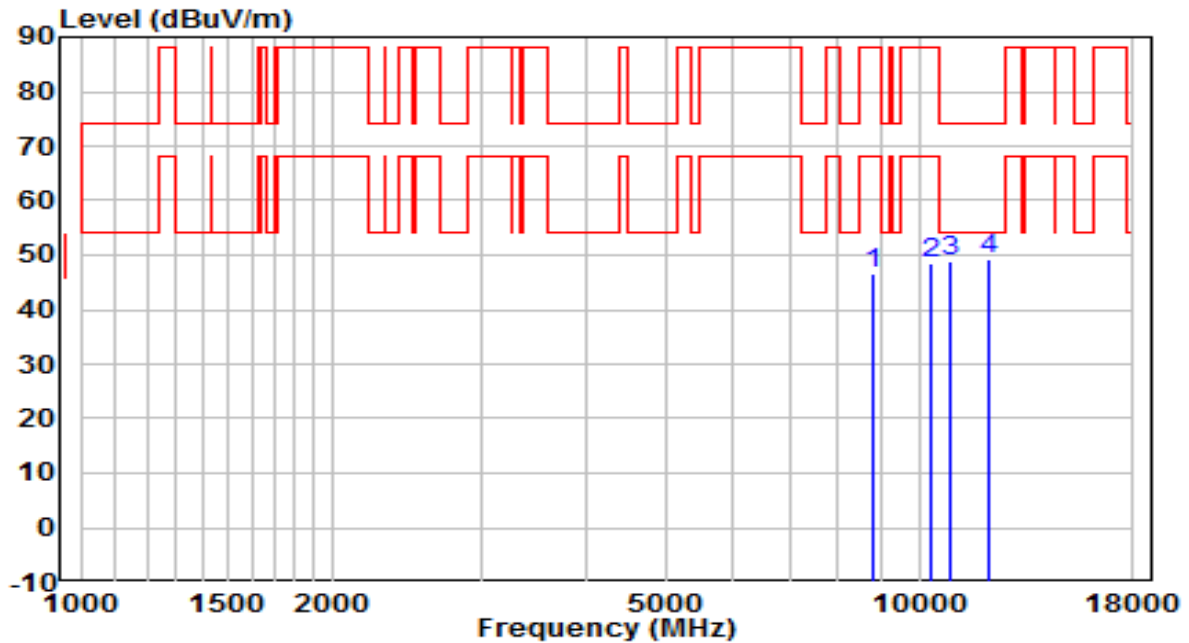


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8786.000	35.33	11.16	46.49	-41.71	88.20	Peak
2	10358.500	35.01	13.56	48.58	-39.62	88.20	Peak
3	10919.500	35.10	13.82	48.92	-25.08	74.00	Peak
4	* 12152.000	36.37	12.91	49.28	-24.72	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6525MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

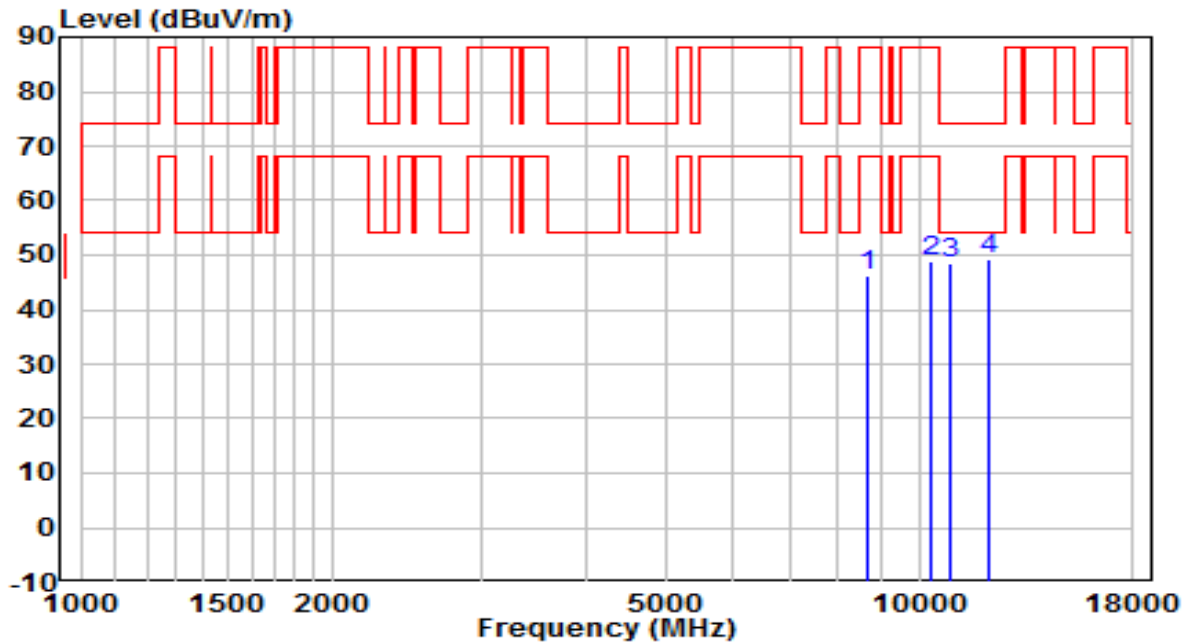


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8650.000	35.70	10.71	46.41	-41.79	88.20	Peak
2	10358.500	35.37	13.56	48.94	-39.26	88.20	Peak
3	10928.000	34.73	13.88	48.61	-25.39	74.00	Peak
4	* 12092.500	36.20	12.95	49.15	-24.85	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6525MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

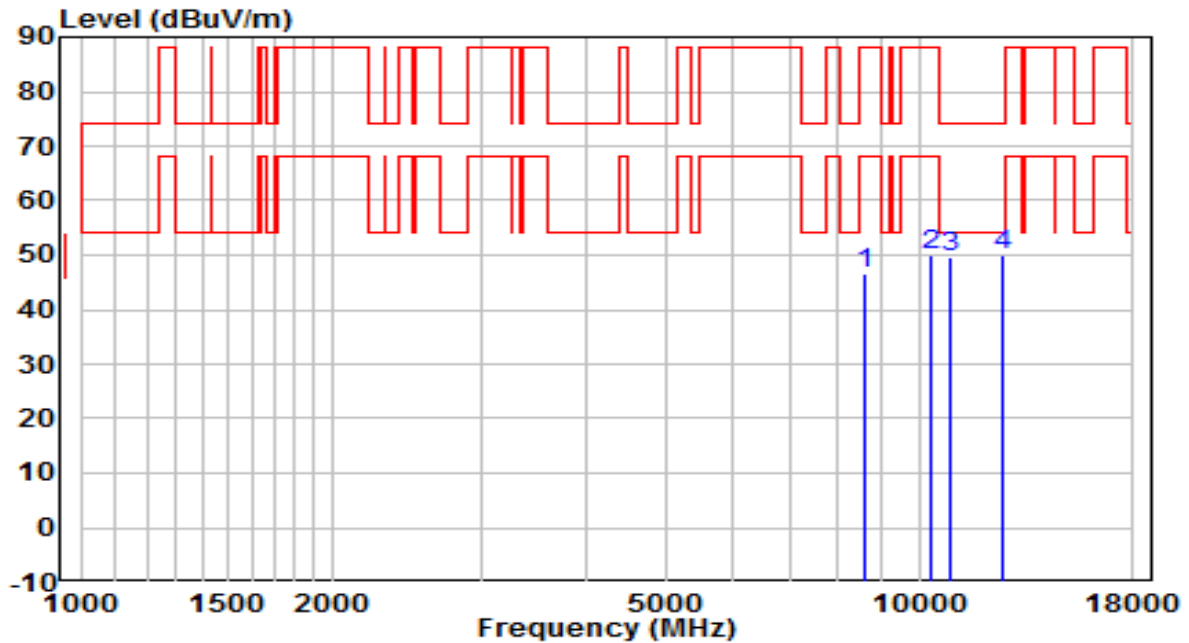


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8607.500	35.91	10.56	46.48	-41.72	88.20	Peak
2	10358.500	36.43	13.56	50.00	-38.20	88.20	Peak
3	10919.500	35.65	13.82	49.46	-24.54	74.00	Peak
4	* 12611.000	36.80	13.02	49.82	-24.18	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6565MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

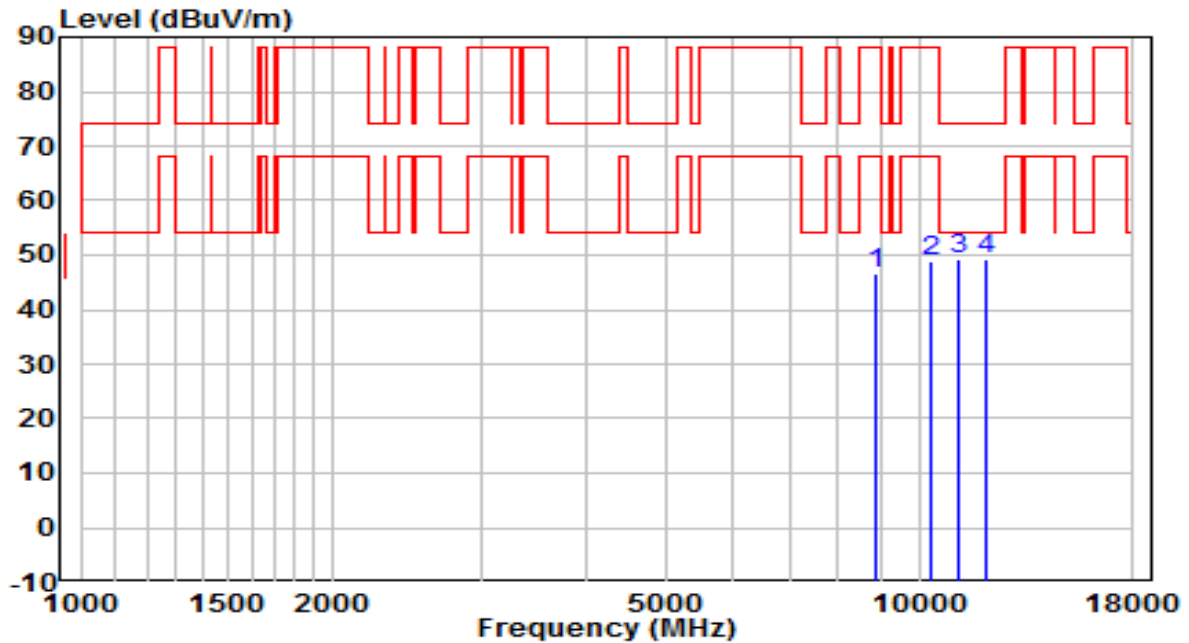


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8871.000	35.15	11.42	46.57	-41.63	88.20	Peak
2	10350.000	35.47	13.57	49.03	-39.17	88.20	Peak
3	* 11115.000	35.96	13.45	49.42	-24.58	74.00	Peak
4	12050.000	36.50	12.75	49.24	-24.76	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6565MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

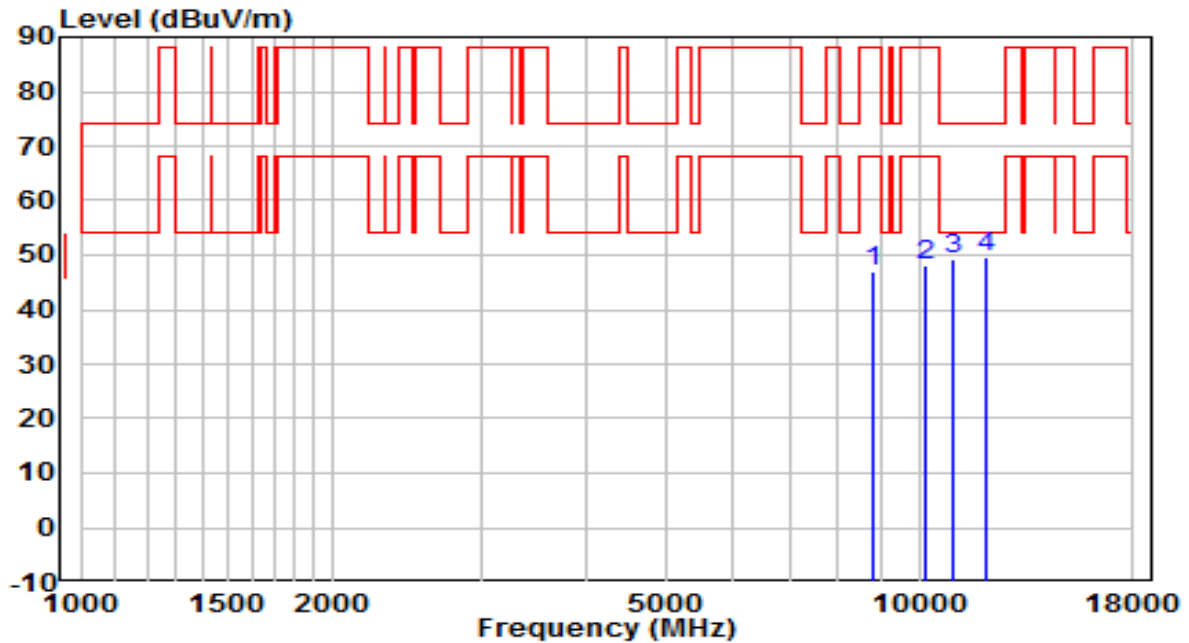


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8786.000	35.85	11.16	47.01	-41.19	88.20	Peak
2	10171.500	34.71	13.42	48.12	-40.08	88.20	Peak
3	10970.500	35.63	13.72	49.35	-24.65	74.00	Peak
4	* 12050.000	36.85	12.75	49.60	-24.40	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6685MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

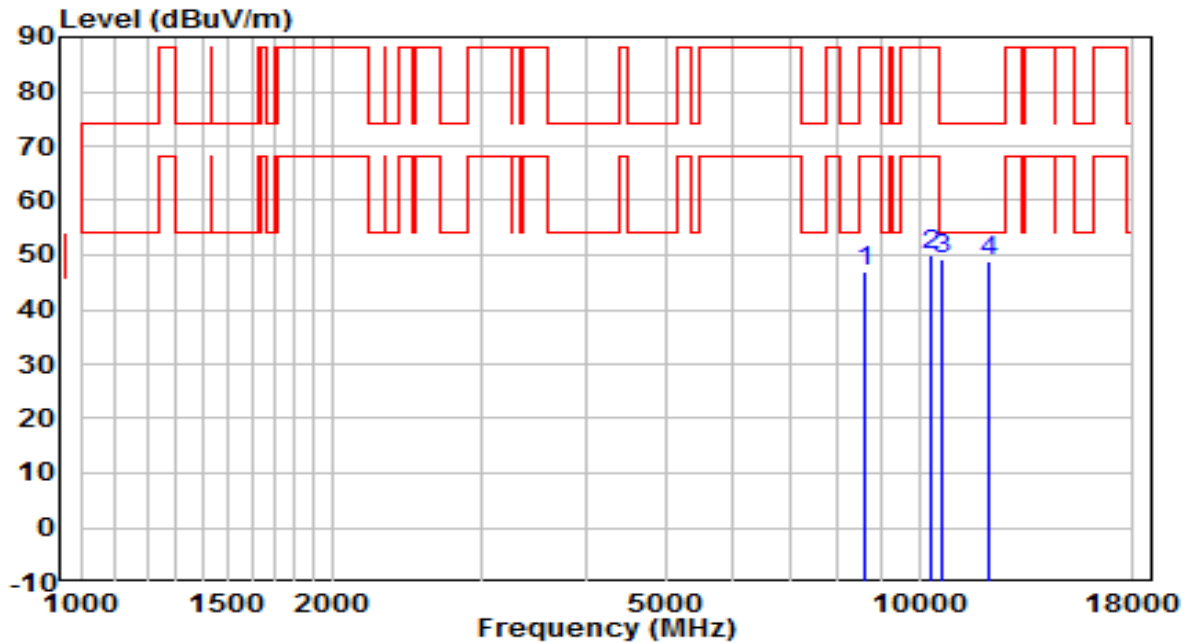


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8633.000	36.25	10.66	46.91	-41.29	88.20	Peak
2	10358.500	36.52	13.56	50.09	-38.11	88.20	Peak
3	* 10622.000	35.64	13.62	49.27	-24.73	74.00	Peak
4	12092.500	36.07	12.95	49.03	-24.97	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6685MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

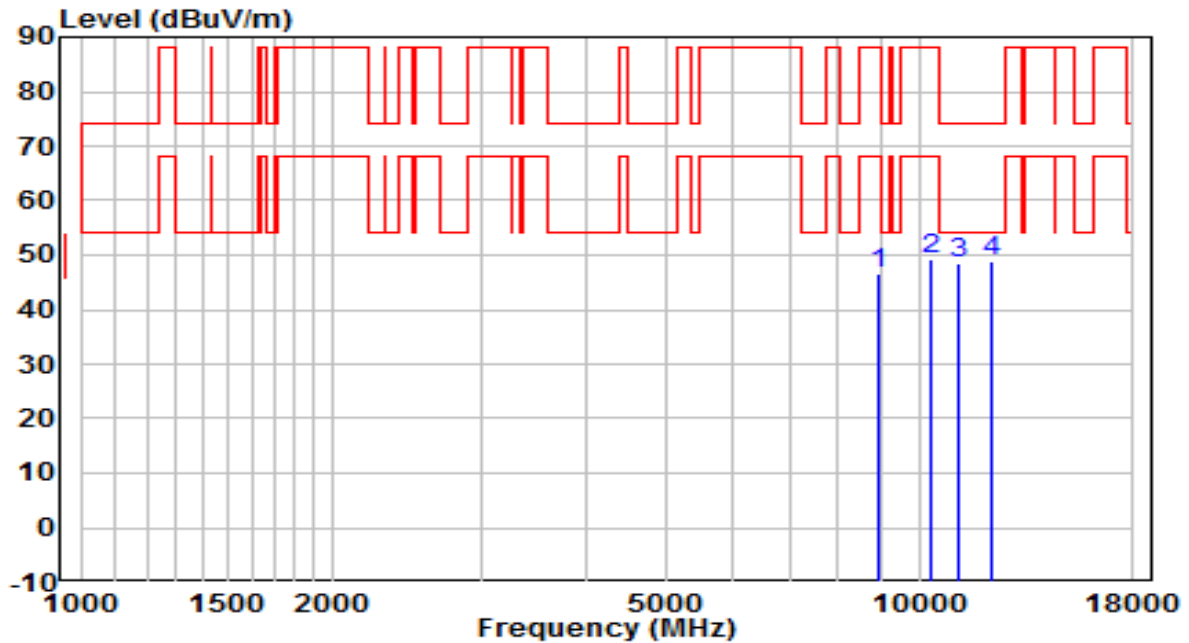


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8947.500	35.37	11.18	46.55	-41.65	88.20	Peak
2	10358.500	35.63	13.56	49.20	-39.00	88.20	Peak
3	11132.000	35.15	13.36	48.51	-25.49	74.00	Peak
4	* 12177.500	35.97	12.87	48.85	-25.15	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6845MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

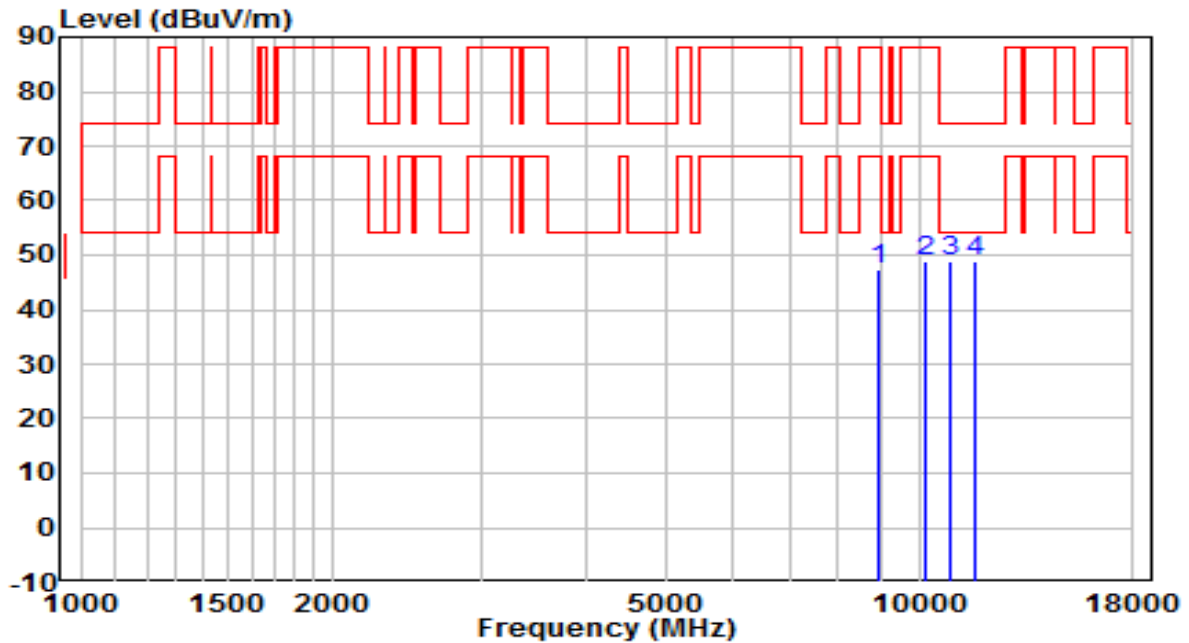


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8930.500	35.91	11.32	47.24	-40.96	88.20	Peak
2	10163.000	35.37	13.38	48.74	-39.46	88.20	Peak
3	10919.500	34.88	13.82	48.70	-25.30	74.00	Peak
4	* 11650.500	35.95	12.83	48.78	-25.22	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6845MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

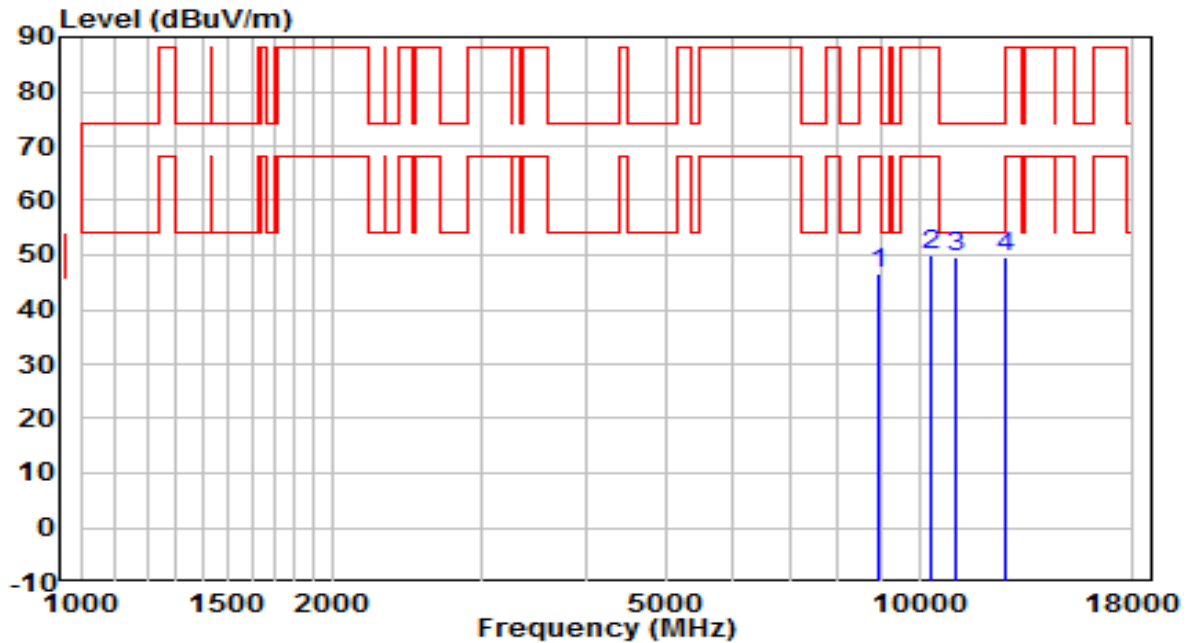


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8922.000	35.25	11.34	46.59	-41.61	88.20	Peak
2	10358.500	36.38	13.56	49.94	-38.26	88.20	Peak
3	11098.000	35.92	13.52	49.44	-24.56	74.00	Peak
4	* 12628.000	36.47	13.02	49.48	-24.52	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6885MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

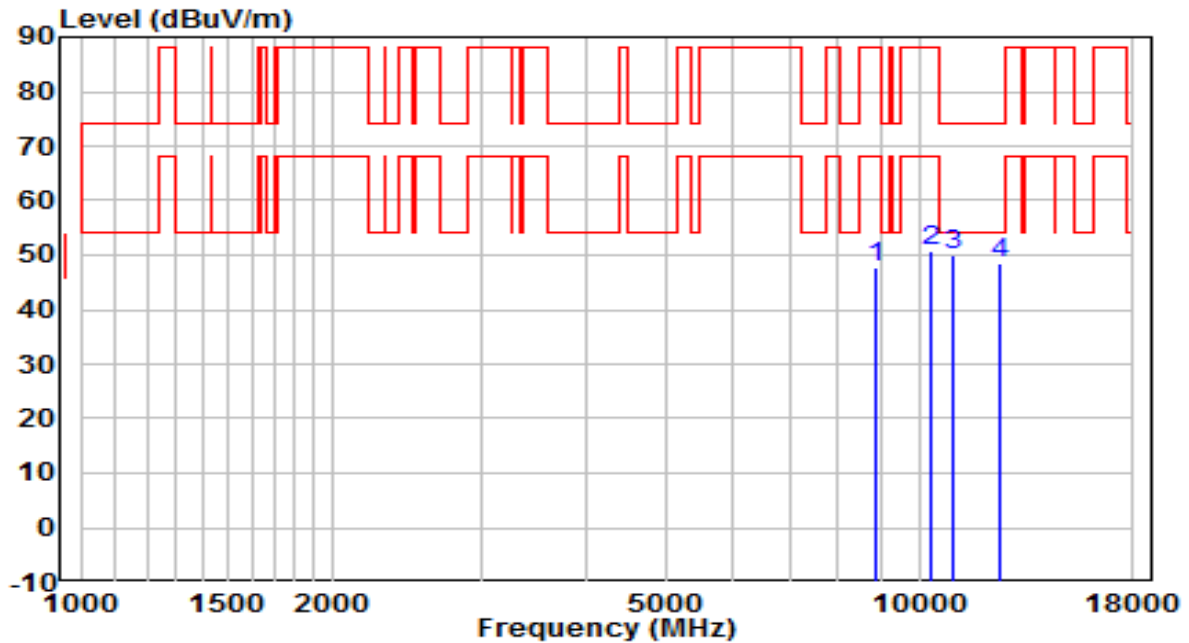


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8862.500	36.25	11.35	47.60	-40.60	88.20	Peak
2	10358.500	37.02	13.56	50.59	-37.61	88.20	Peak
3	* 10936.500	36.15	13.91	50.06	-23.94	74.00	Peak
4	12441.000	35.80	12.79	48.59	-25.41	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6885MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

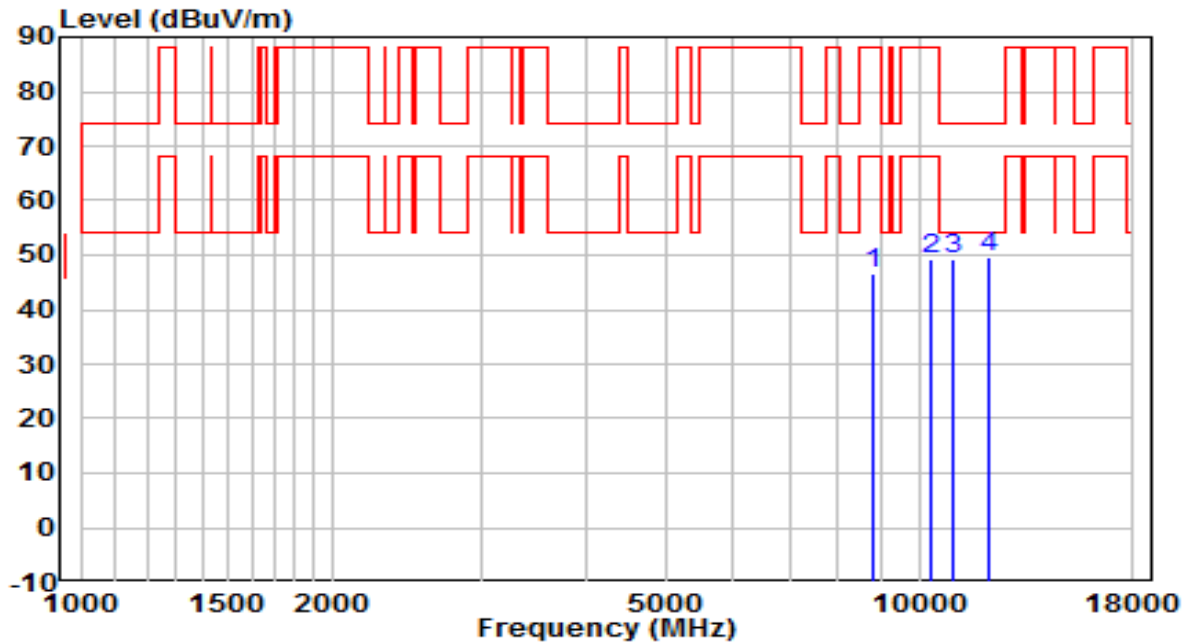


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8803.000	35.48	11.17	46.65	-41.55	88.20	Peak
2	10358.500	35.70	13.56	49.26	-38.94	88.20	Peak
3	10996.000	35.50	13.78	49.28	-24.72	74.00	Peak
4	* 12152.000	36.85	12.91	49.76	-24.24	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6925MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

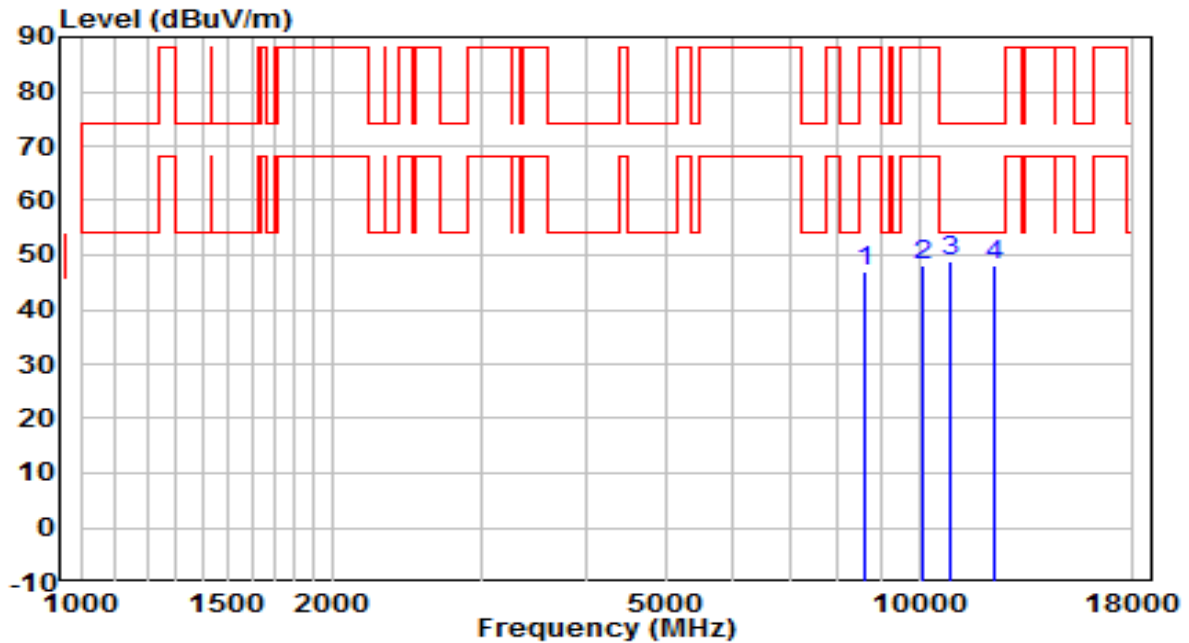


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8607.500	36.50	10.56	47.06	-41.14	88.20	Peak
2	10120.500	35.25	13.05	48.30	-39.90	88.20	Peak
3	* 10894.000	35.12	13.84	48.95	-25.05	74.00	Peak
4	12322.000	35.48	12.74	48.22	-25.78	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6925MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

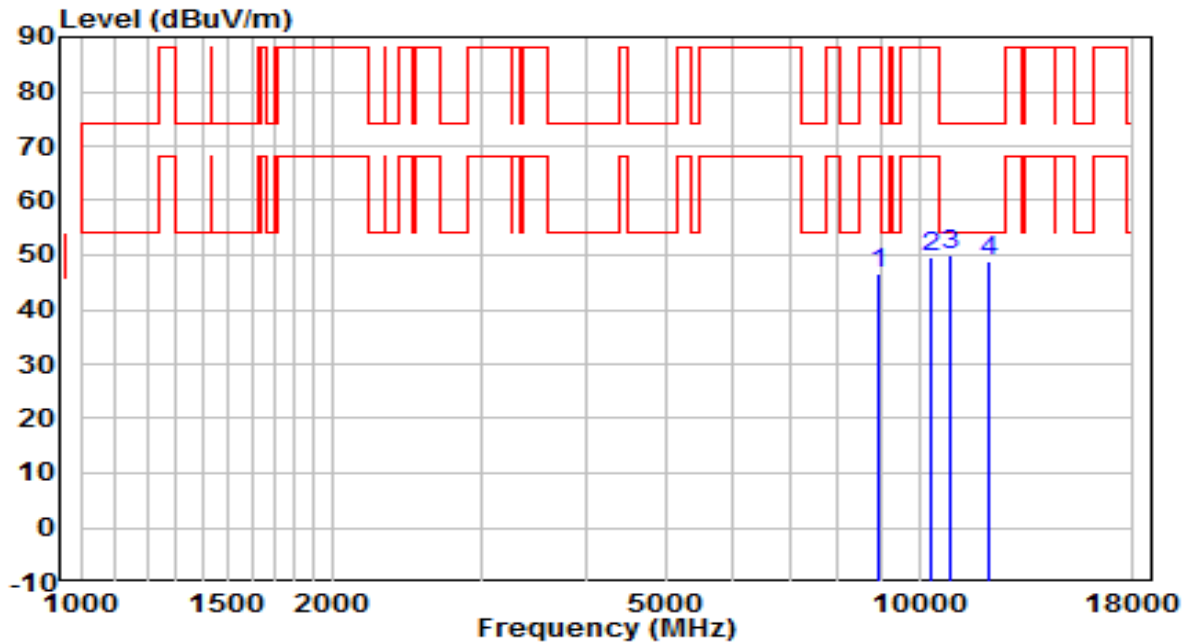


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8930.500	35.38	11.32	46.70	-41.50	88.20	Peak
2	10358.500	36.19	13.56	49.75	-38.45	88.20	Peak
3	* 10885.500	36.29	13.90	50.18	-23.82	74.00	Peak
4	12109.500	35.89	12.79	48.68	-25.32	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7005MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

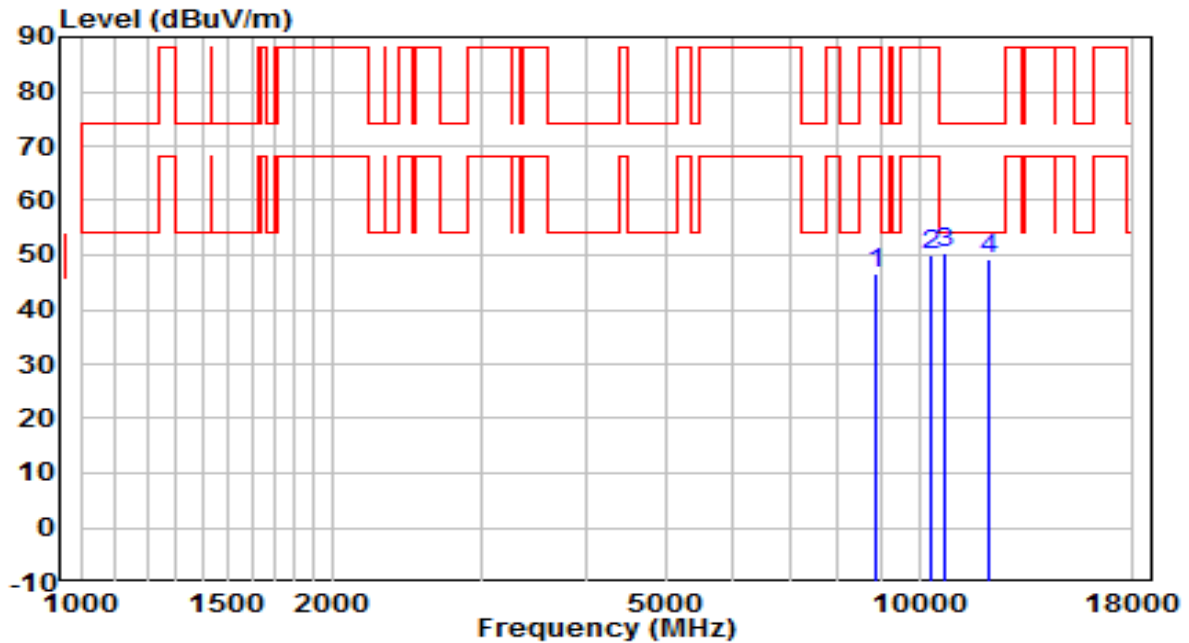


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8871.000	35.14	11.42	46.56	-41.64	88.20	Peak
2	10358.500	36.55	13.56	50.11	-38.09	88.20	Peak
3	* 10724.000	36.58	13.68	50.26	-23.74	74.00	Peak
4	12092.500	36.15	12.95	49.11	-24.89	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7005MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

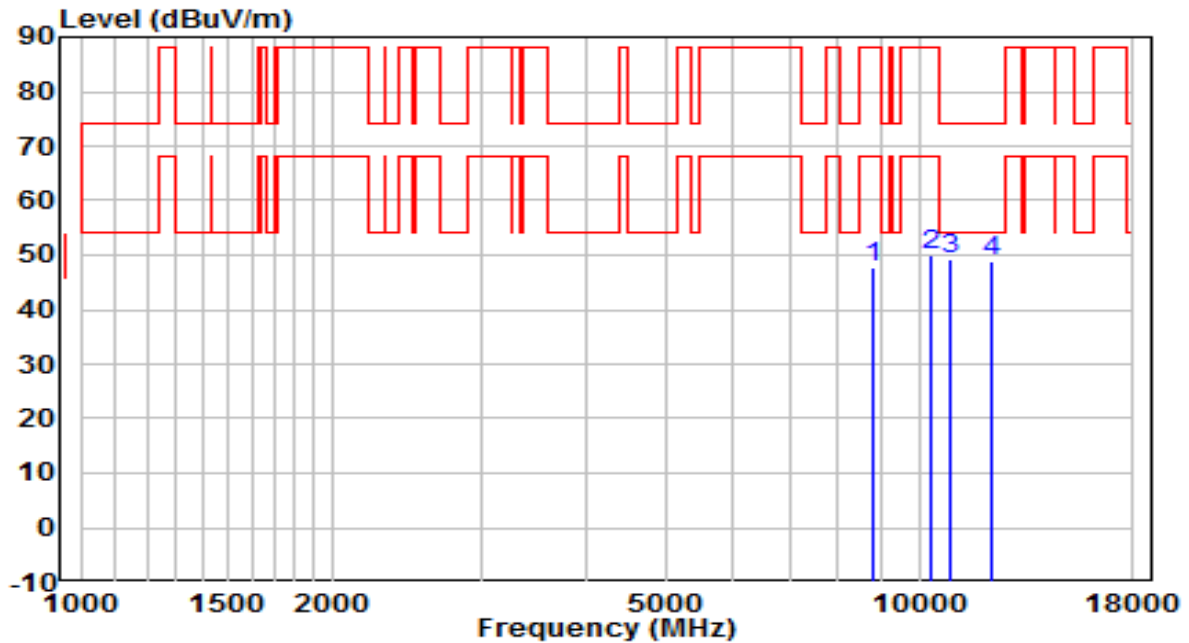


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8828.500	36.52	11.15	47.67	-40.53	88.20	Peak
2	10358.500	36.30	13.56	49.86	-38.34	88.20	Peak
3	* 10911.000	35.37	13.80	49.17	-24.83	74.00	Peak
4	12220.000	36.05	12.93	48.98	-25.02	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

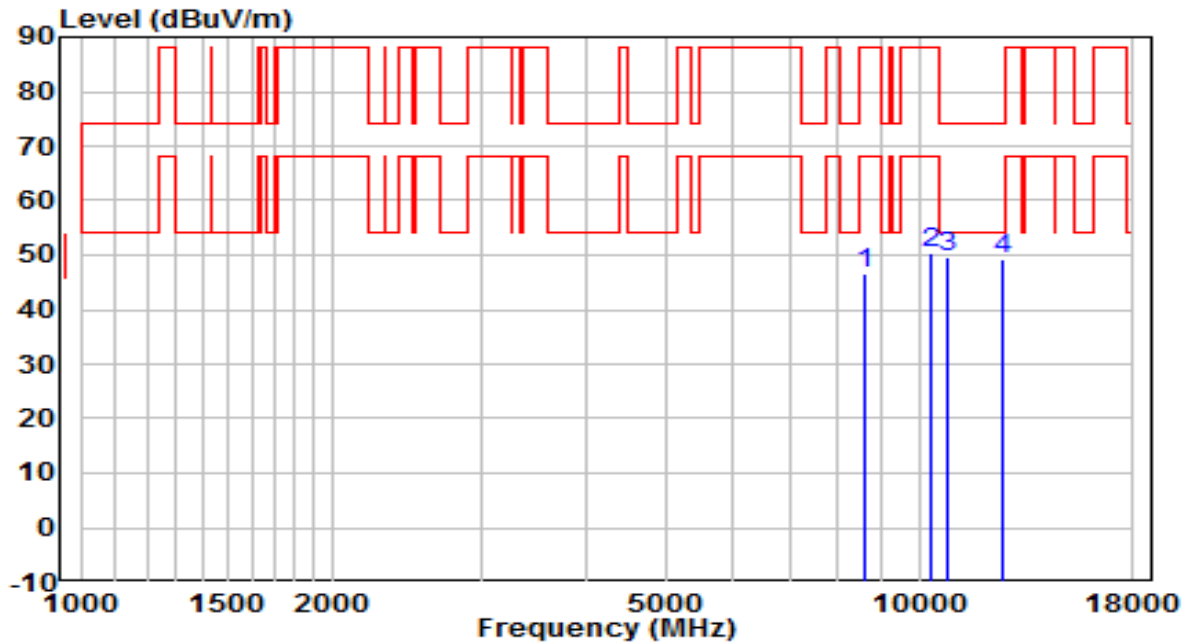


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8607.500	36.17	10.56	46.73	-41.47	88.20	Peak
2	10358.500	37.00	13.56	50.56	-37.64	88.20	Peak
3	* 10826.000	35.58	13.92	49.50	-24.50	74.00	Peak
4	12585.500	36.36	13.00	49.36	-24.64	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

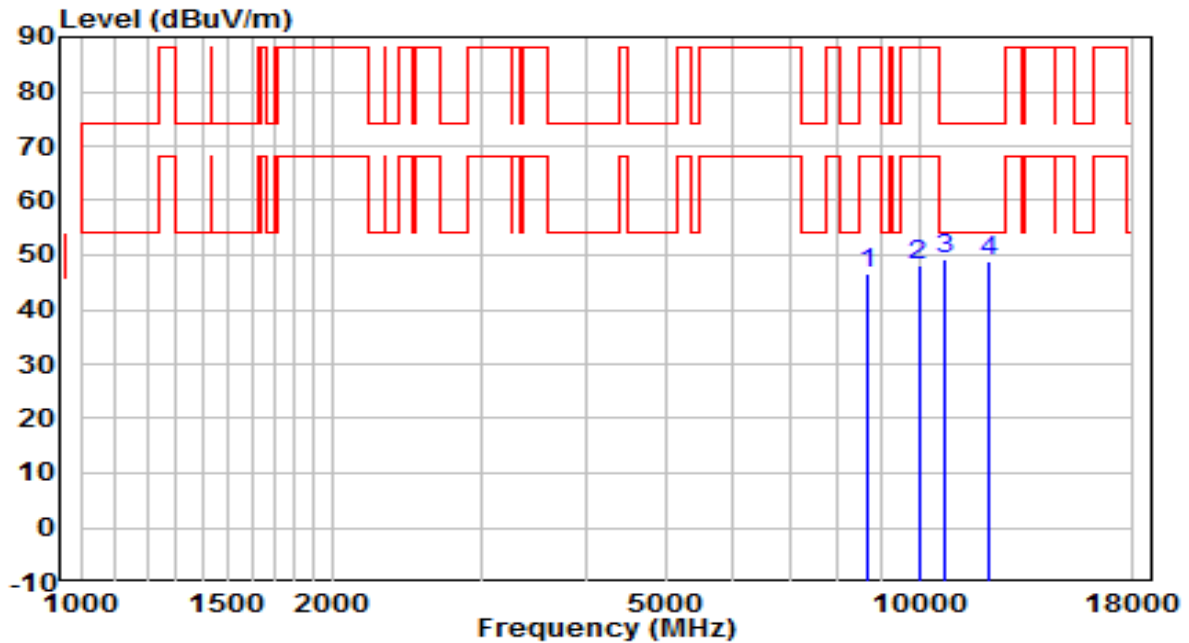


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8692.500	35.67	10.88	46.55	-41.65	88.20	Peak
2	9984.500	35.23	12.98	48.21	-39.99	88.20	Peak
3	* 10758.000	35.61	13.70	49.31	-24.69	74.00	Peak
4	12067.000	36.07	12.82	48.89	-25.11	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

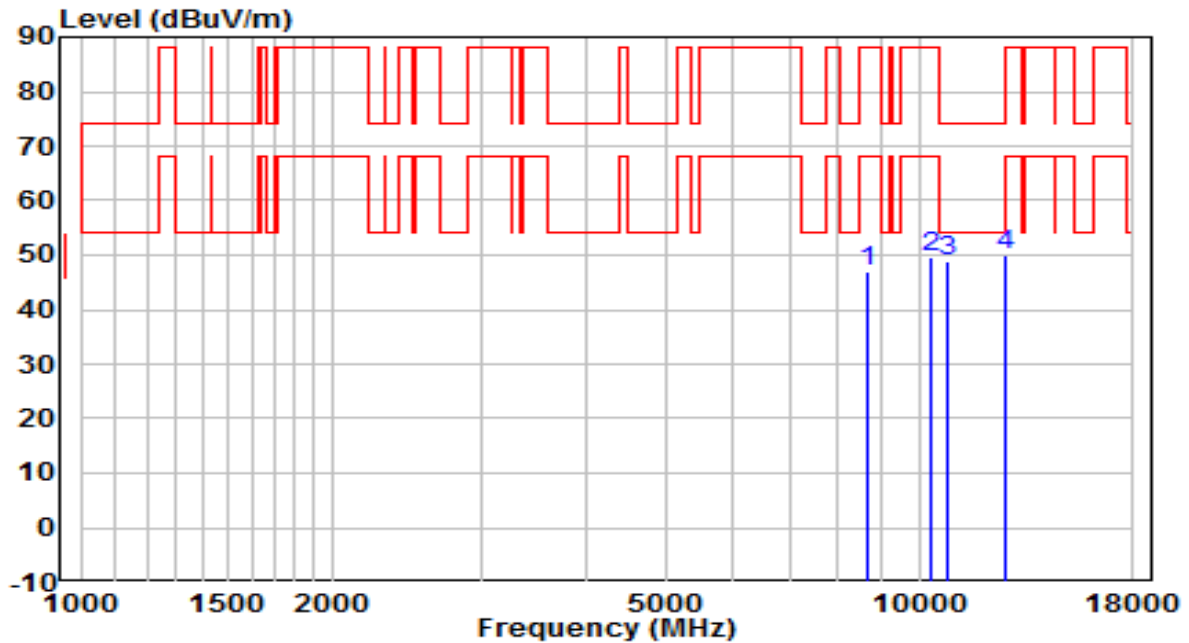


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8692.500	36.00	10.88	46.88	-41.32	88.20	Peak
2	10358.500	35.98	13.56	49.54	-38.66	88.20	Peak
3	10834.500	34.79	13.91	48.69	-25.31	74.00	Peak
4	* 12653.500	36.89	13.30	50.19	-23.81	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

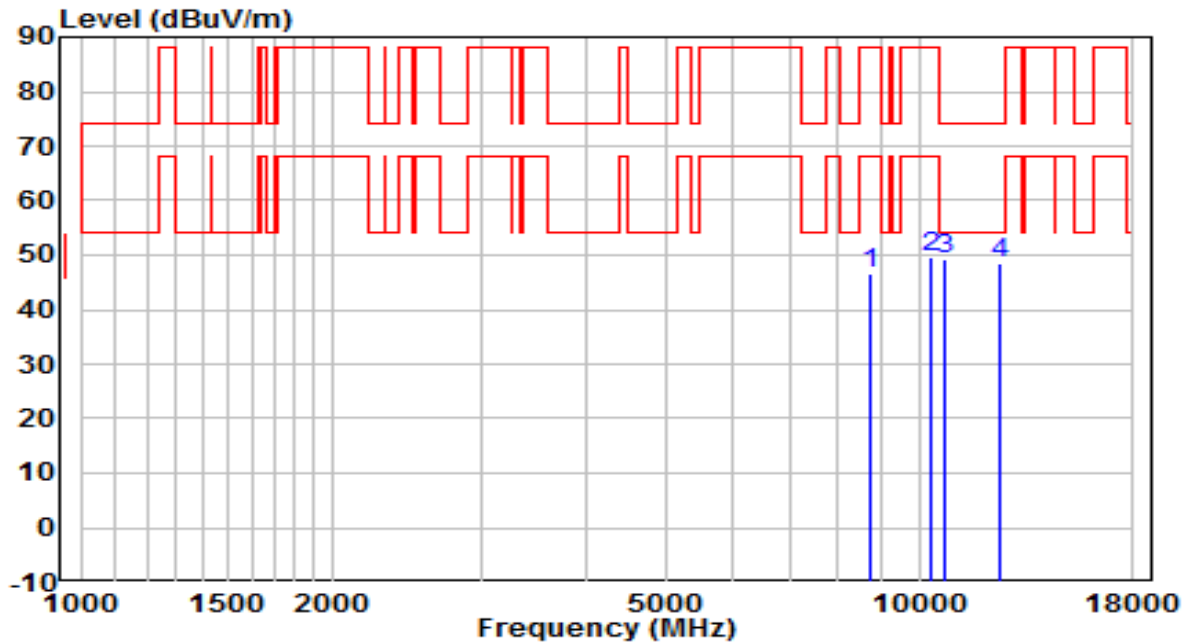


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8769.000	35.56	11.20	46.76	-41.44	88.20	Peak
2	10358.500	35.98	13.56	49.54	-38.66	88.20	Peak
3	* 10698.500	35.50	13.63	49.13	-24.87	74.00	Peak
4	12449.500	35.76	12.75	48.51	-25.49	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6225MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

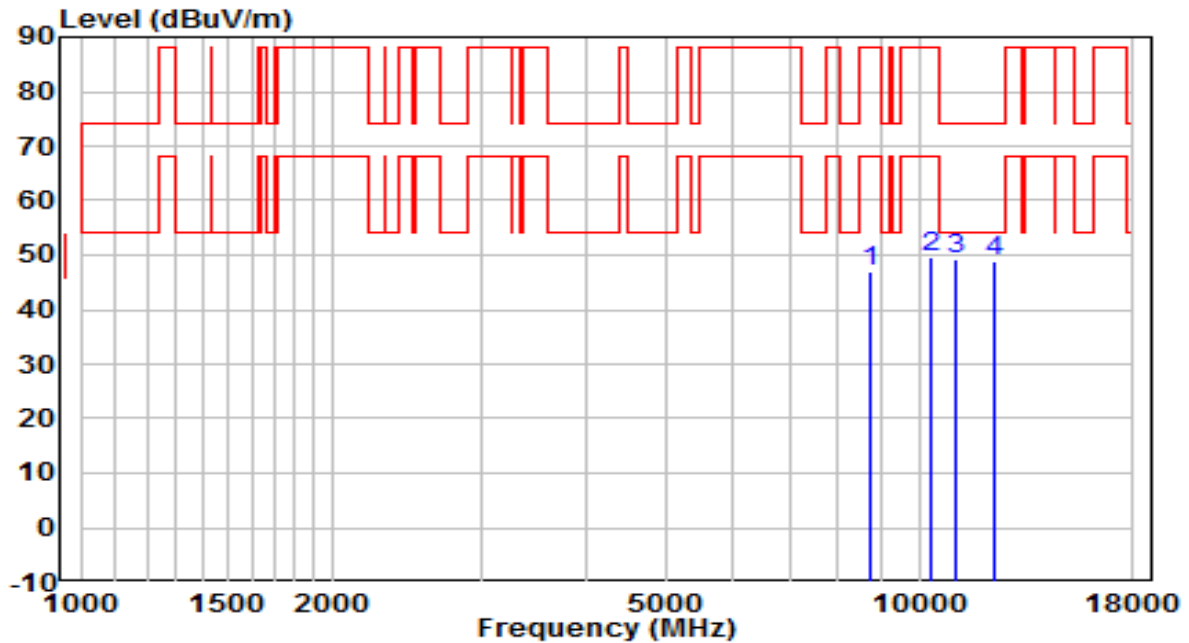


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8735.000	36.20	10.93	47.13	-41.07	88.20	Peak
2	10358.500	36.05	13.56	49.61	-38.59	88.20	Peak
3	* 11089.500	35.81	13.62	49.43	-24.57	74.00	Peak
4	12330.500	36.07	12.76	48.82	-25.18	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6225MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

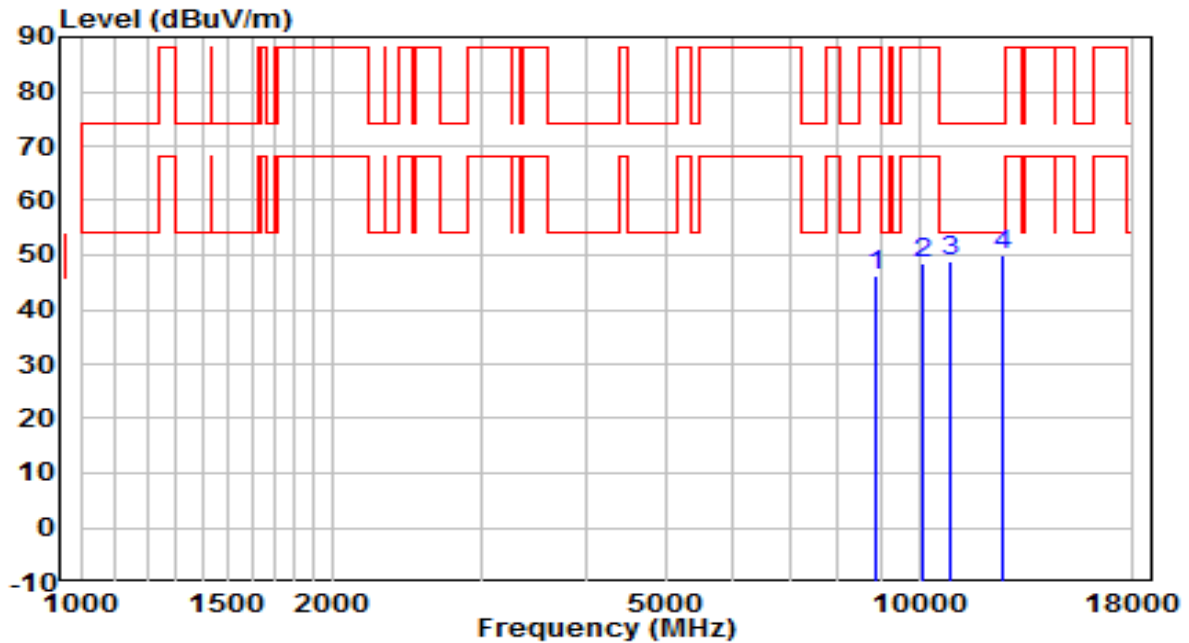


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8896.500	35.23	11.16	46.39	-41.81	88.20	Peak
2	10129.000	35.25	13.30	48.55	-39.65	88.20	Peak
3	10911.000	35.09	13.80	48.89	-25.11	74.00	Peak
4	* 12577.000	37.13	12.96	50.09	-23.91	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6385MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

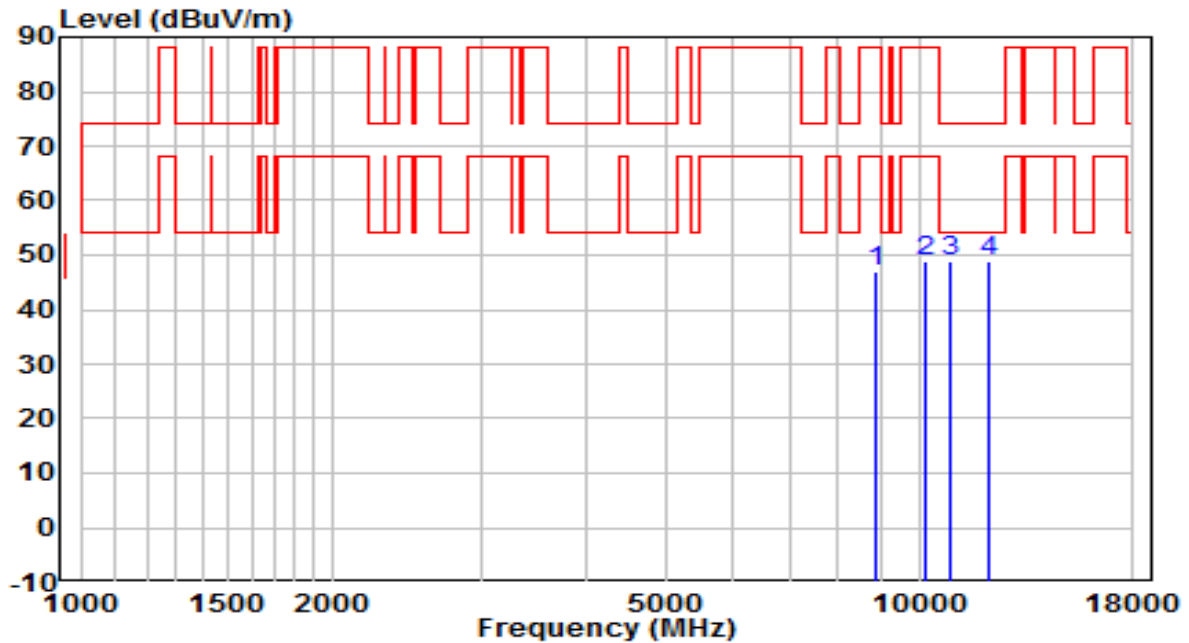


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8896.500	35.77	11.16	46.93	-41.27	88.20	Peak
2	10171.500	35.48	13.42	48.90	-39.30	88.20	Peak
3	10894.000	34.94	13.84	48.78	-25.22	74.00	Peak
4	* 12126.500	36.16	12.79	48.95	-25.05	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6385MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

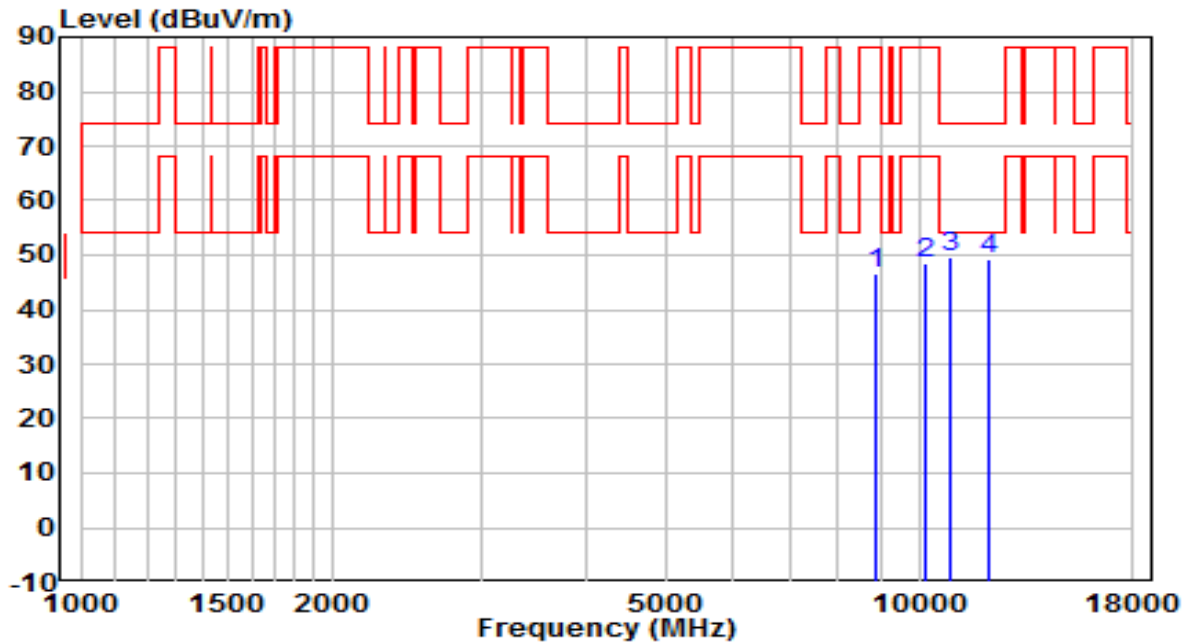


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8862.500	35.28	11.35	46.63	-41.57	88.20	Peak
2	10180.000	34.98	13.48	48.46	-39.74	88.20	Peak
3	* 10928.000	35.65	13.88	49.54	-24.46	74.00	Peak
4	12135.000	36.38	12.87	49.25	-24.75	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6465MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

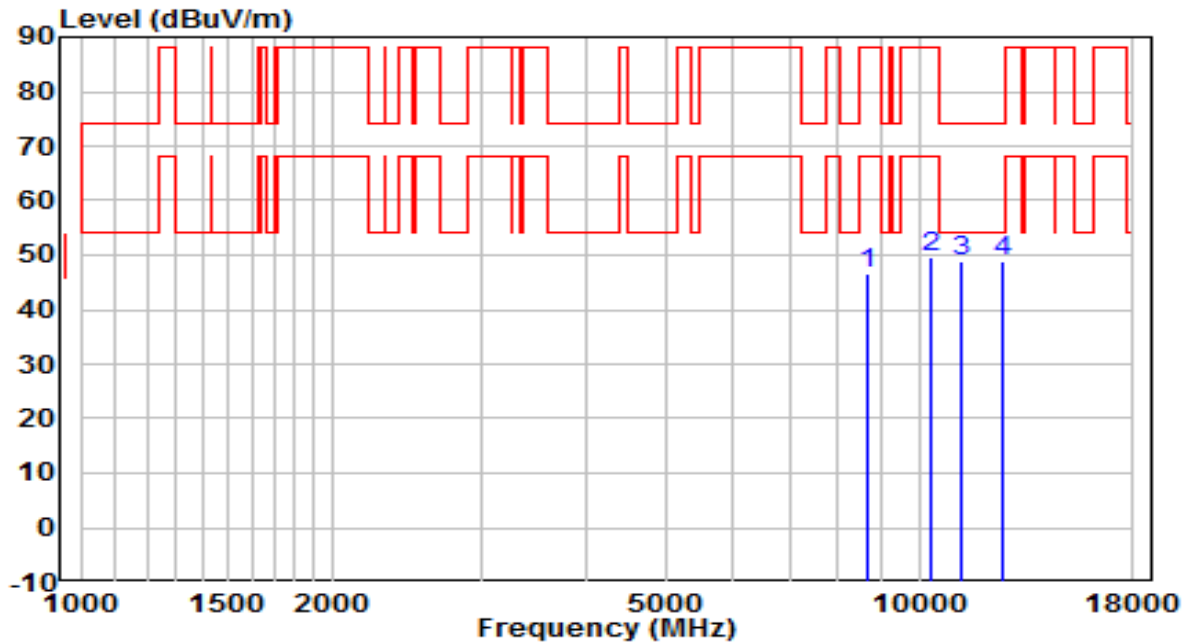


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8692.500	35.76	10.88	46.64	-41.56	88.20	Peak
2	10358.500	35.99	13.56	49.55	-38.65	88.20	Peak
3	11242.500	35.40	13.36	48.76	-25.24	74.00	Peak
4	* 12594.000	35.81	13.04	48.86	-25.14	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6465MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

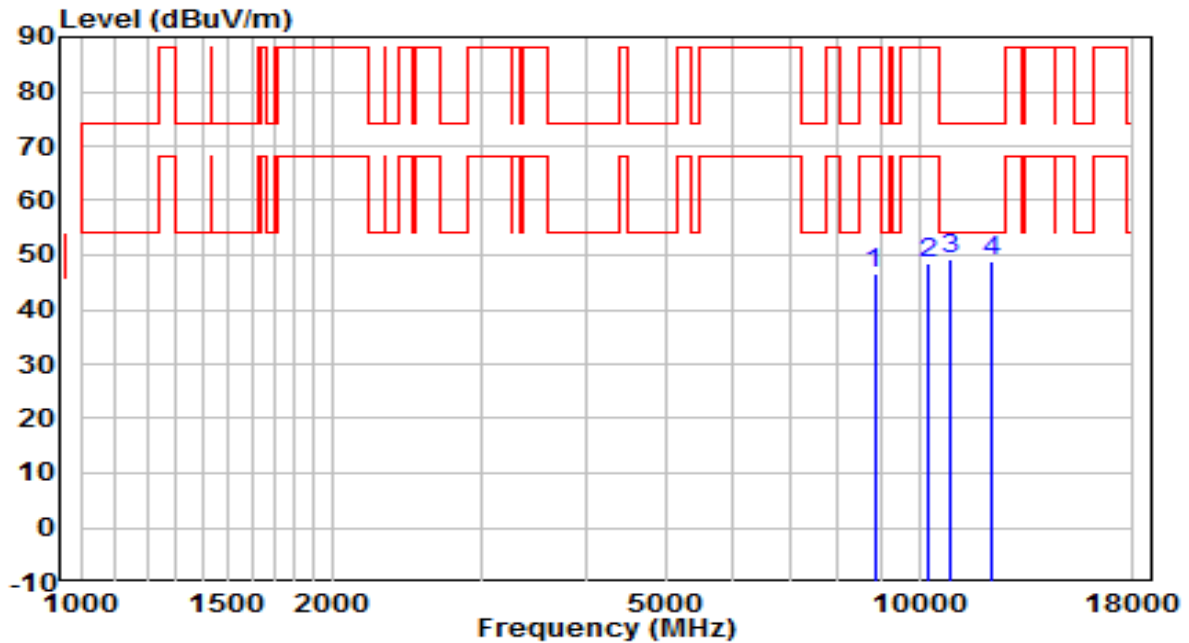


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8845.500	35.41	11.20	46.60	-41.60	88.20	Peak
2	10273.500	35.06	13.43	48.49	-39.71	88.20	Peak
3	* 10928.000	35.22	13.88	49.10	-24.90	74.00	Peak
4	12194.500	35.70	13.07	48.77	-25.23	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6545MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

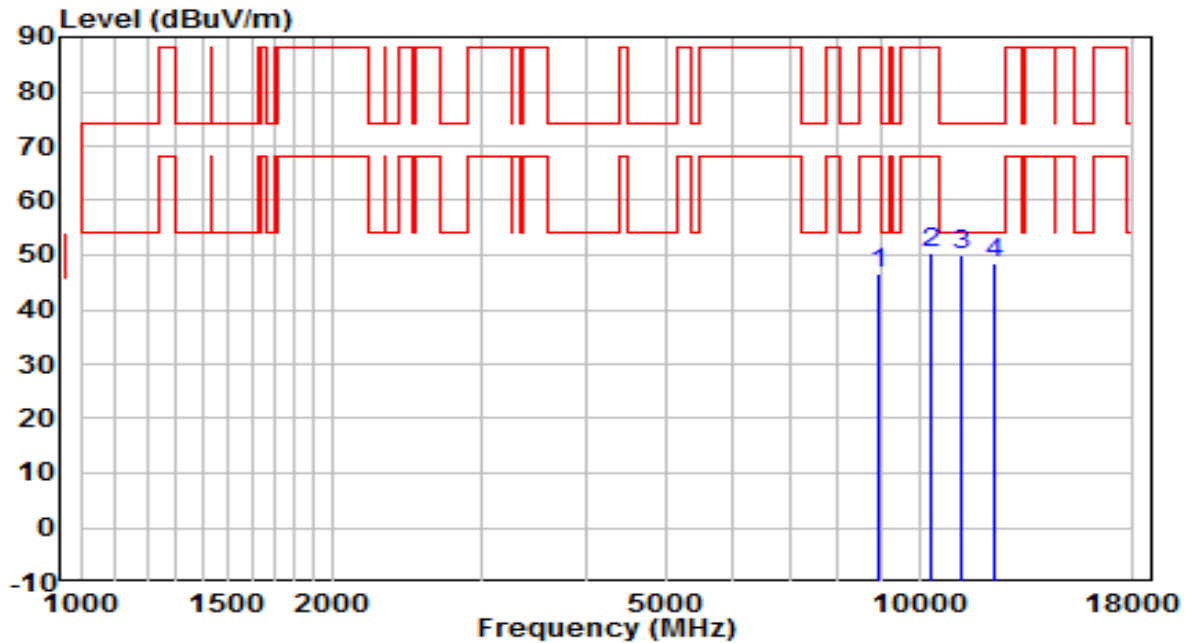


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8913.500	35.44	11.26	46.70	-41.50	88.20	Peak
2	10358.500	36.69	13.56	50.25	-37.95	88.20	Peak
3	* 11242.500	36.48	13.36	49.84	-24.16	74.00	Peak
4	12288.000	35.65	12.89	48.54	-25.46	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6545MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

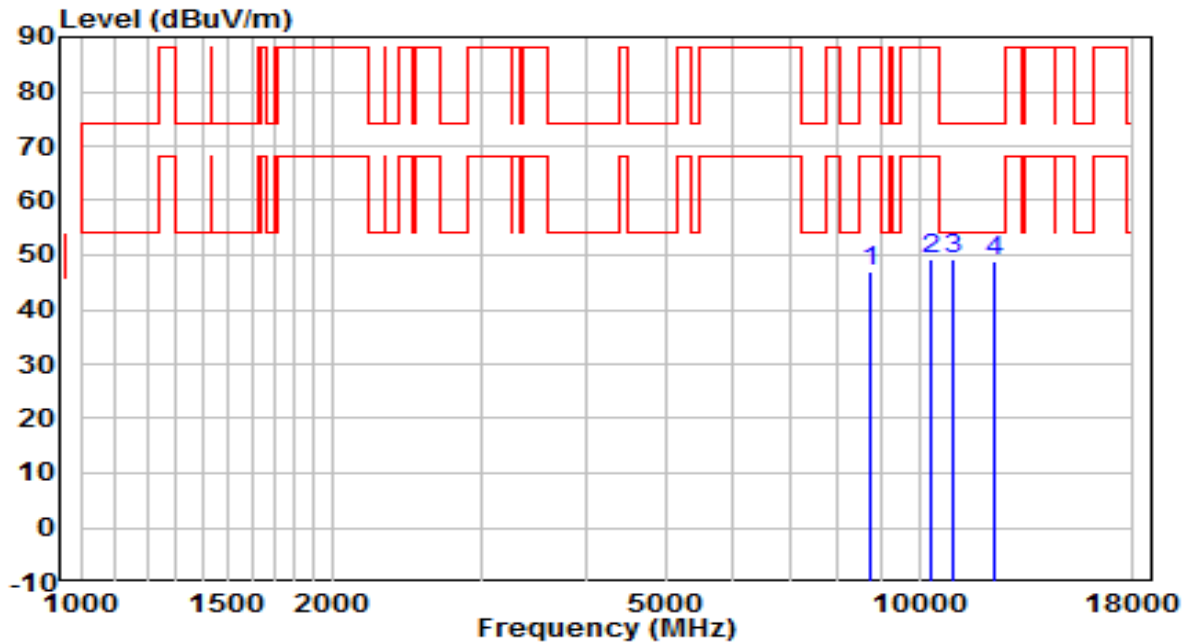


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8726.500	35.91	10.95	46.86	-41.34	88.20	Peak
2	10358.500	35.75	13.56	49.32	-38.88	88.20	Peak
3	* 10996.000	35.44	13.78	49.22	-24.78	74.00	Peak
4	12339.000	36.23	12.77	49.00	-25.00	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6625MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

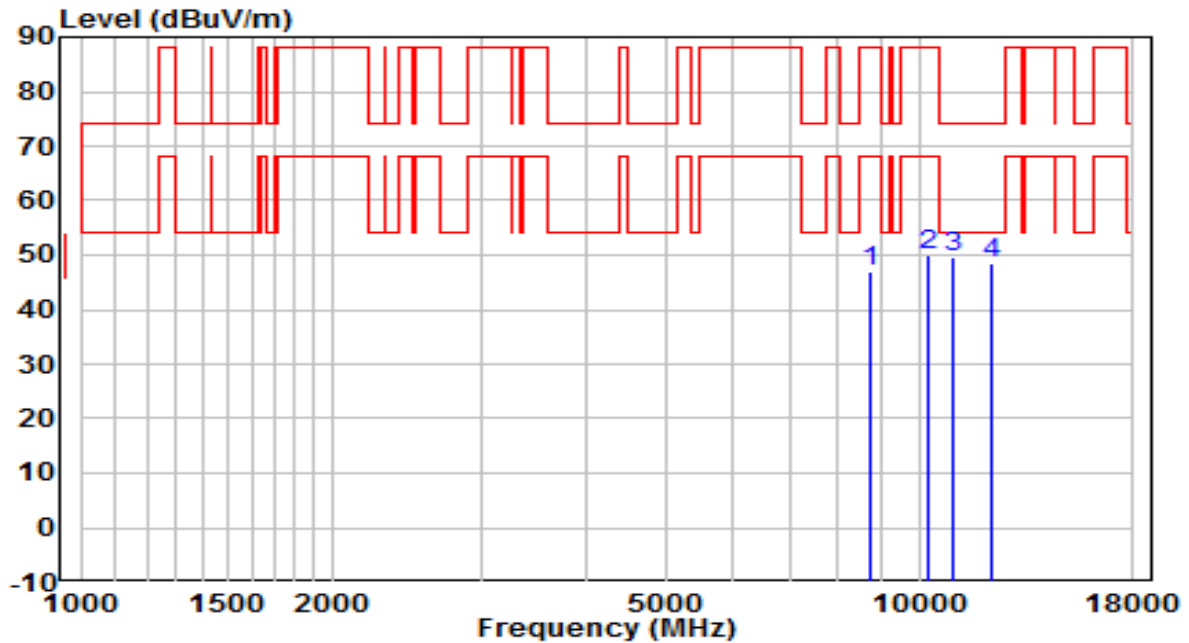


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8735.000	36.24	10.93	47.17	-41.03	88.20	Peak
2	10273.500	36.44	13.43	49.87	-38.33	88.20	Peak
3	* 10953.500	35.82	13.80	49.62	-24.38	74.00	Peak
4	12220.000	35.59	12.93	48.52	-25.48	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6625MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

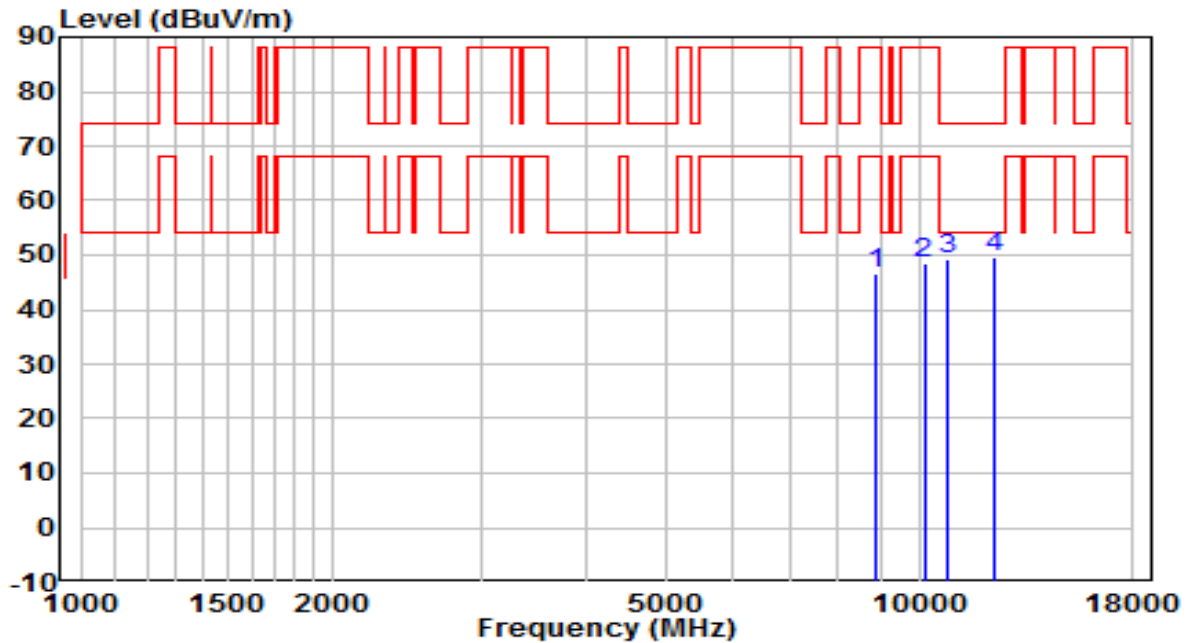


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8871.000	35.20	11.42	46.62	-41.58	88.20	Peak
2	10137.500	35.28	13.27	48.55	-39.65	88.20	Peak
3	10826.000	35.41	13.92	49.33	-24.67	74.00	Peak
4	* 12305.000	36.75	12.90	49.65	-24.35	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6705MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

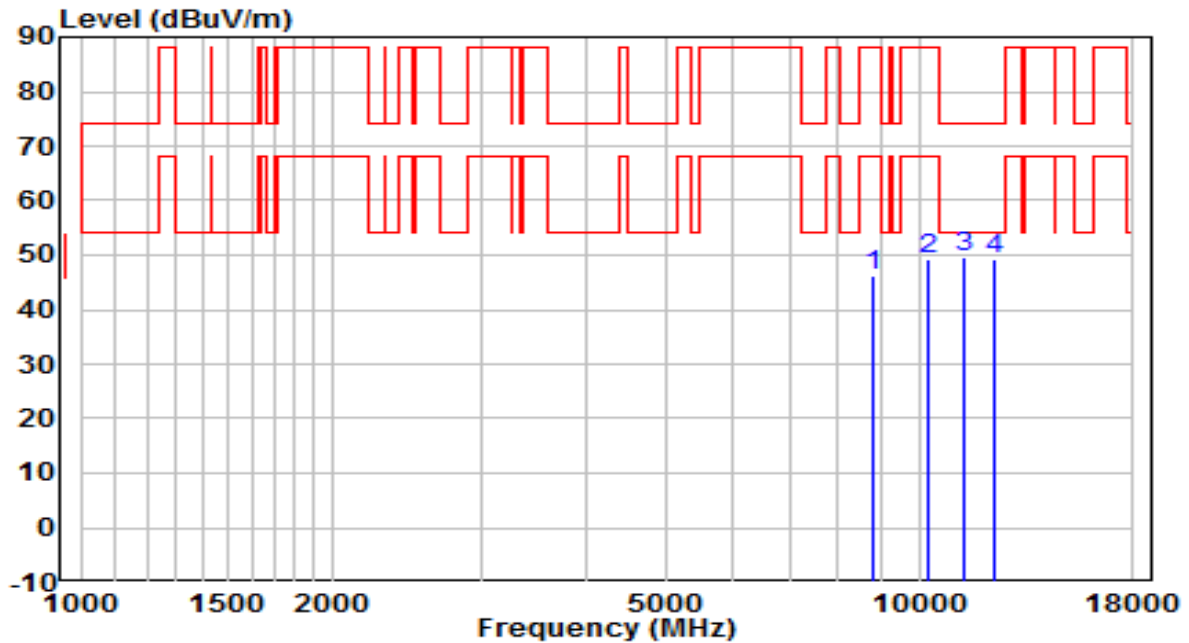


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8794.500	35.26	11.15	46.41	-41.79	88.20	Peak
2	10248.000	35.82	13.48	49.30	-38.90	88.20	Peak
3	* 11327.500	36.19	13.46	49.65	-24.35	74.00	Peak
4	12296.500	36.20	12.91	49.11	-24.89	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6705MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

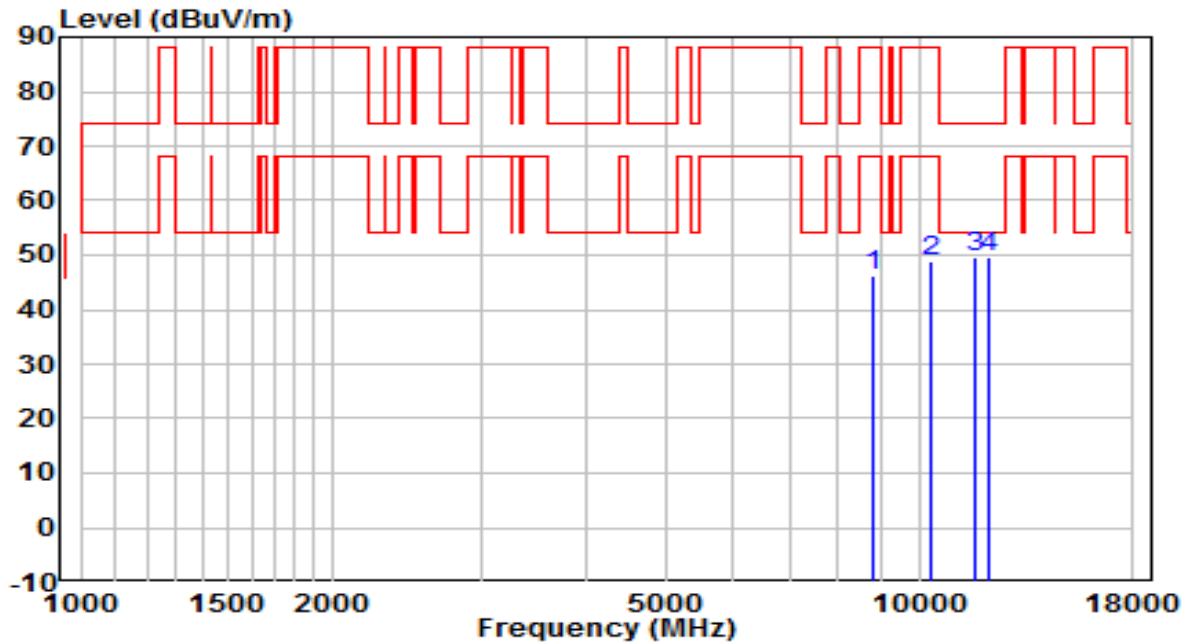


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8794.500	35.10	11.15	46.25	-41.95	88.20	Peak
2	10358.500	35.15	13.56	48.71	-39.49	88.20	Peak
3	* 11642.000	36.53	12.92	49.45	-24.55	74.00	Peak
4	12118.000	36.69	12.76	49.45	-24.55	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6865MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

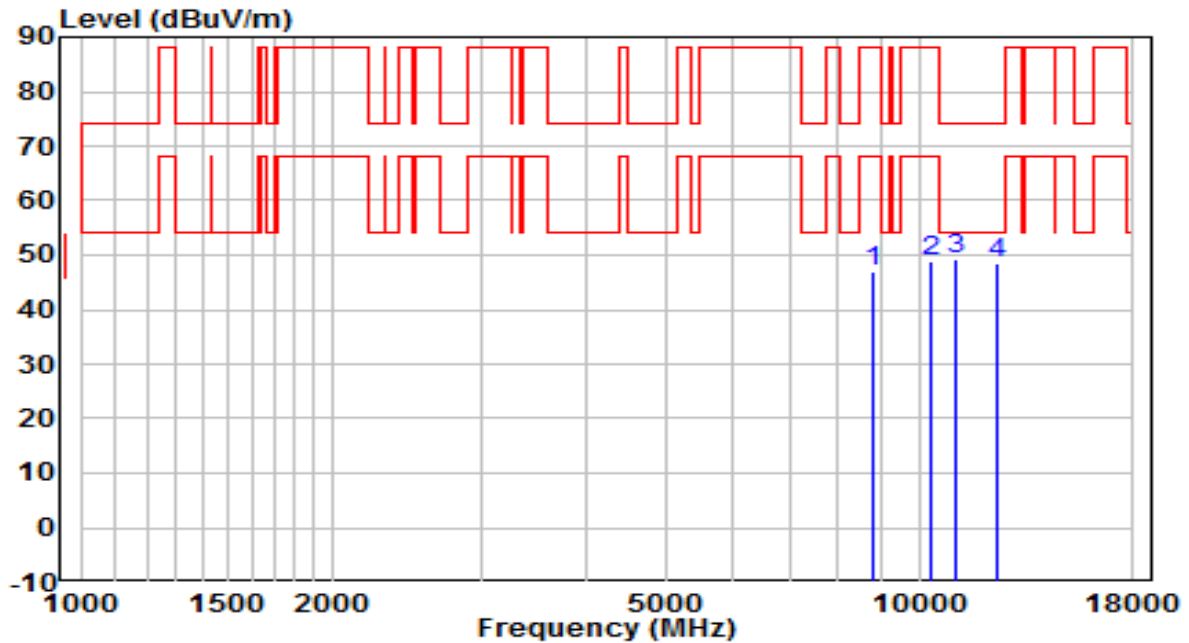


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8786.000	35.84	11.16	47.00	-41.20	88.20	Peak
2	10358.500	35.44	13.56	49.01	-39.19	88.20	Peak
3	* 11098.000	35.84	13.52	49.36	-24.64	74.00	Peak
4	12373.000	35.70	12.65	48.35	-25.65	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6865MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

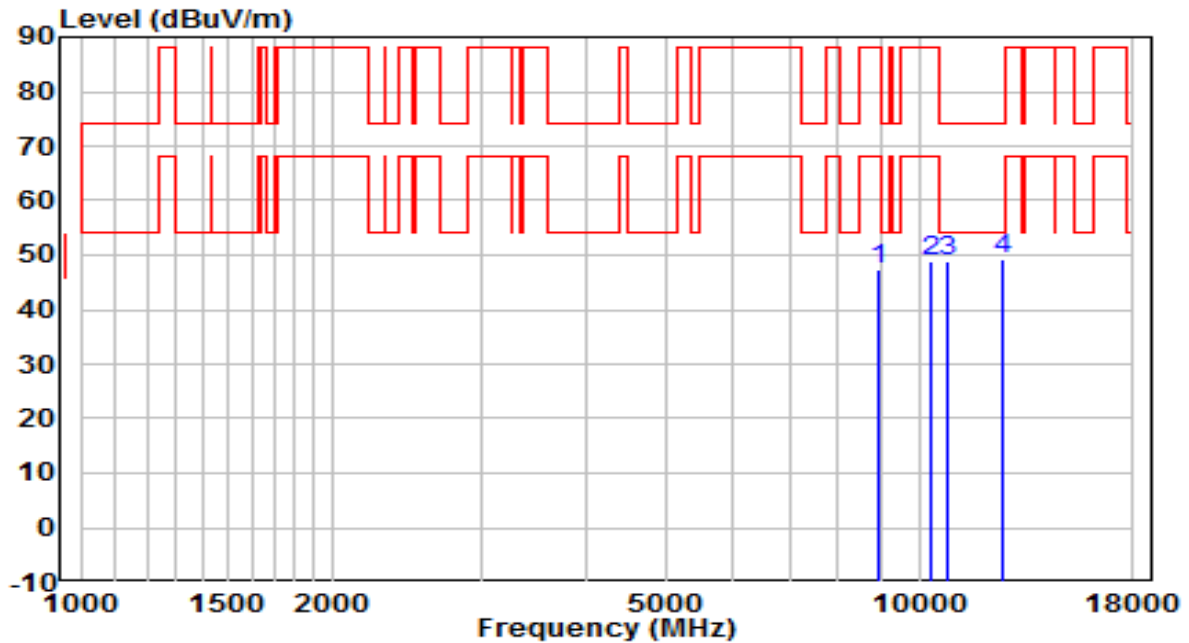


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8922.000	35.92	11.34	47.25	-40.95	88.20	Peak
2	10358.500	35.46	13.56	49.02	-39.18	88.20	Peak
3	10817.500	35.03	13.93	48.96	-25.04	74.00	Peak
4	* 12602.500	36.27	13.03	49.30	-24.70	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6945MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

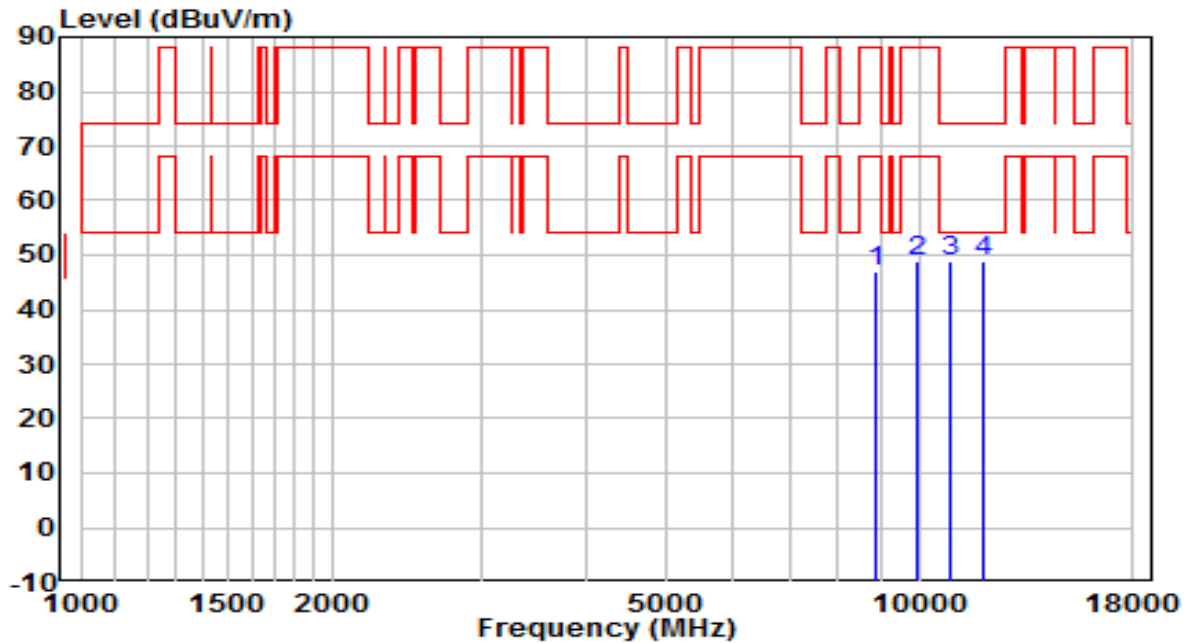


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8879.500	35.56	11.29	46.84	-41.36	88.20	Peak
2	9925.000	35.73	13.02	48.75	-39.45	88.20	Peak
3	* 10902.500	35.16	13.79	48.95	-25.05	74.00	Peak
4	11888.500	36.20	12.57	48.77	-25.23	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6945MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

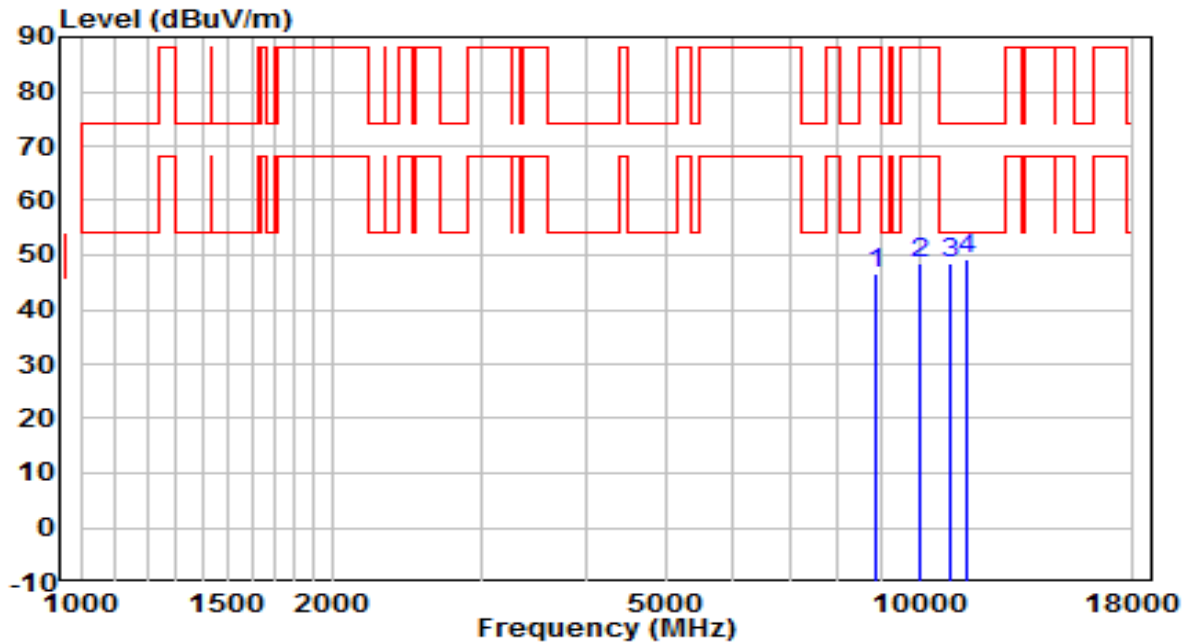


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8871.000	35.36	11.42	46.78	-41.42	88.20	Peak
2	10027.000	35.62	12.98	48.60	-39.60	88.20	Peak
3	10928.000	34.77	13.88	48.65	-25.35	74.00	Peak
4	* 11412.500	35.79	13.33	49.12	-24.88	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

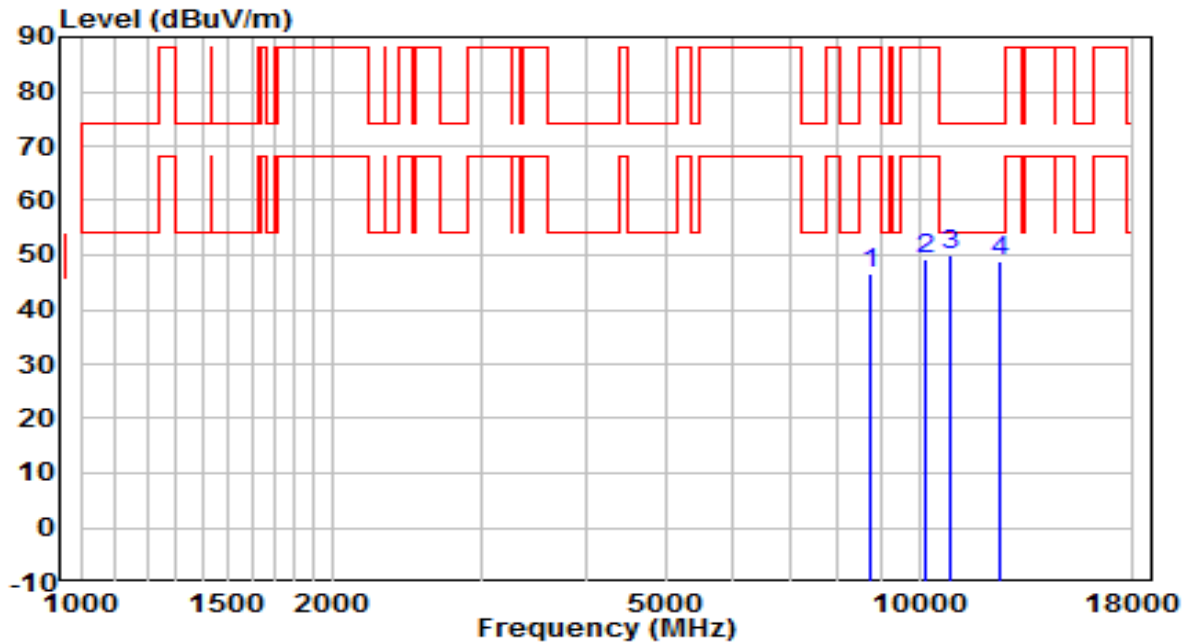


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8760.500	35.45	11.15	46.60	-41.60	88.20	Peak
2	10154.500	35.79	13.29	49.08	-39.12	88.20	Peak
3	* 10928.000	36.28	13.88	50.16	-23.84	74.00	Peak
4	12449.500	36.29	12.75	49.04	-24.96	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

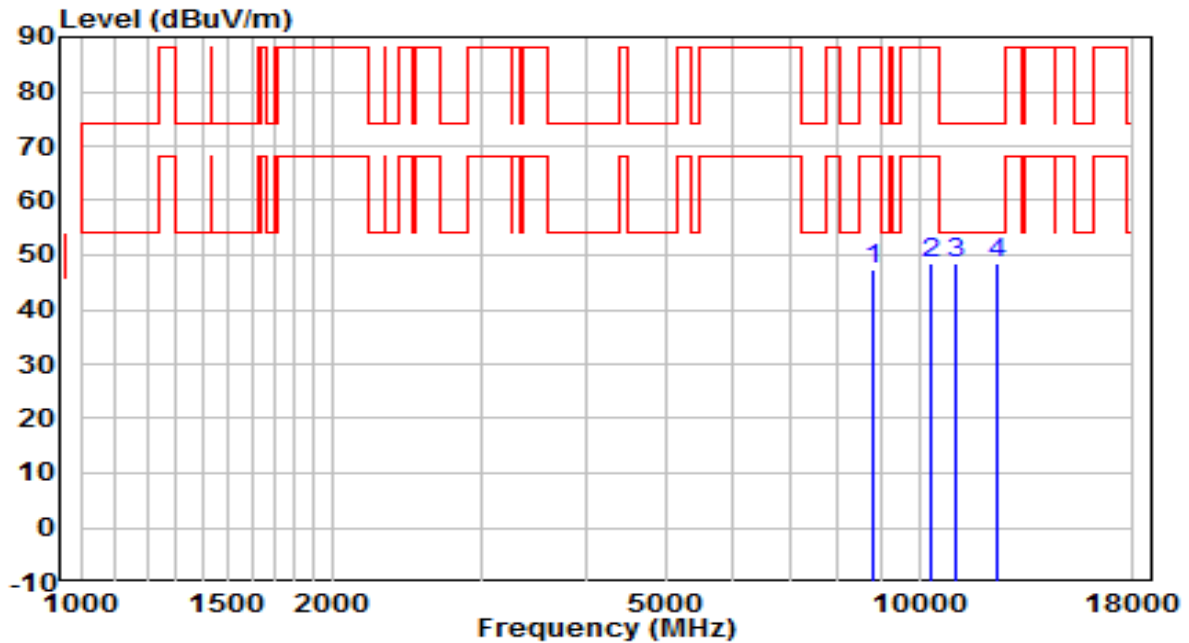


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8828.500	36.16	11.15	47.30	-40.90	88.20	Peak
2	10307.500	35.06	13.39	48.45	-39.75	88.20	Peak
3	11030.000	34.70	13.75	48.45	-25.55	74.00	Peak
4	* 12407.000	35.92	12.70	48.63	-25.37	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

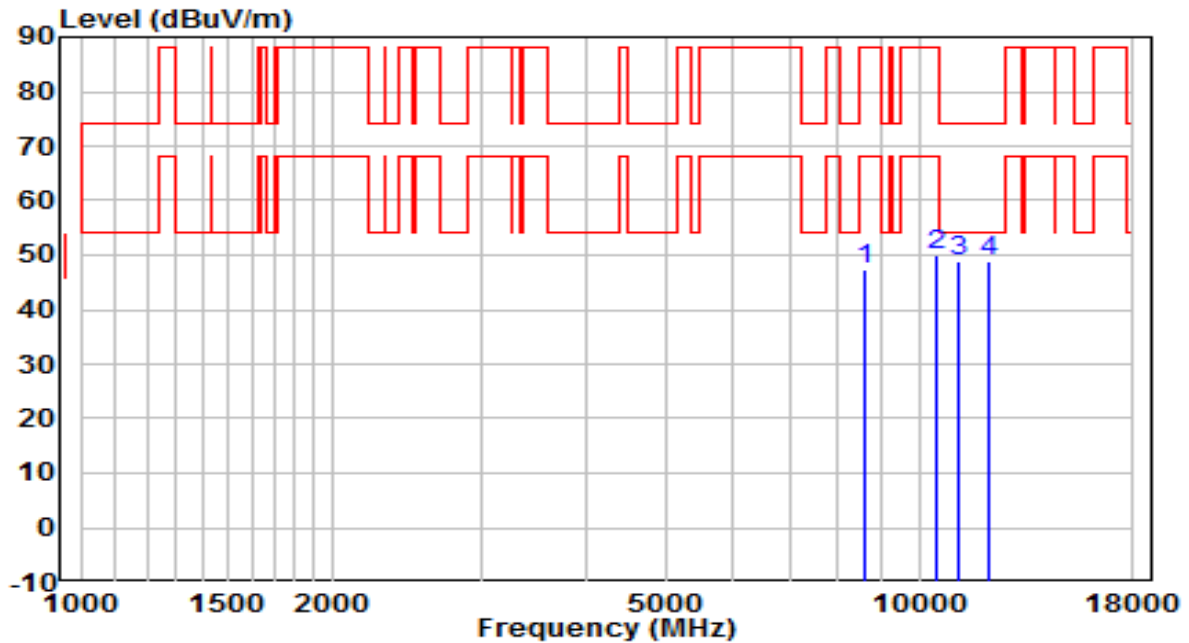


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8607.500	36.89	10.56	47.46	-40.74	88.20	Peak
2	10486.000	36.10	13.87	49.97	-38.23	88.20	Peak
3	* 11123.500	35.47	13.41	48.89	-25.11	74.00	Peak
4	12135.000	35.93	12.87	48.80	-25.20	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>ss</sub> =1	Test Voltage	120V/60Hz

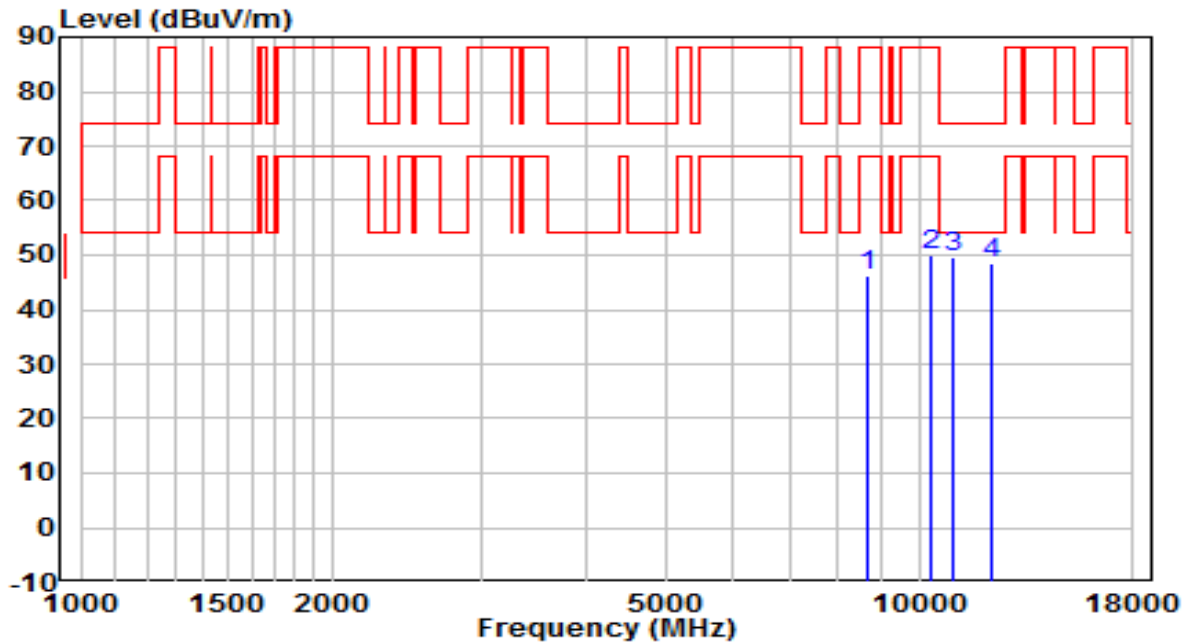


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8692.500	35.32	10.88	46.20	-42.00	88.20	Peak
2	10358.500	36.51	13.56	50.08	-38.12	88.20	Peak
3	* 10936.500	35.55	13.91	49.46	-24.54	74.00	Peak
4	12203.000	35.61	12.99	48.60	-25.40	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6185MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

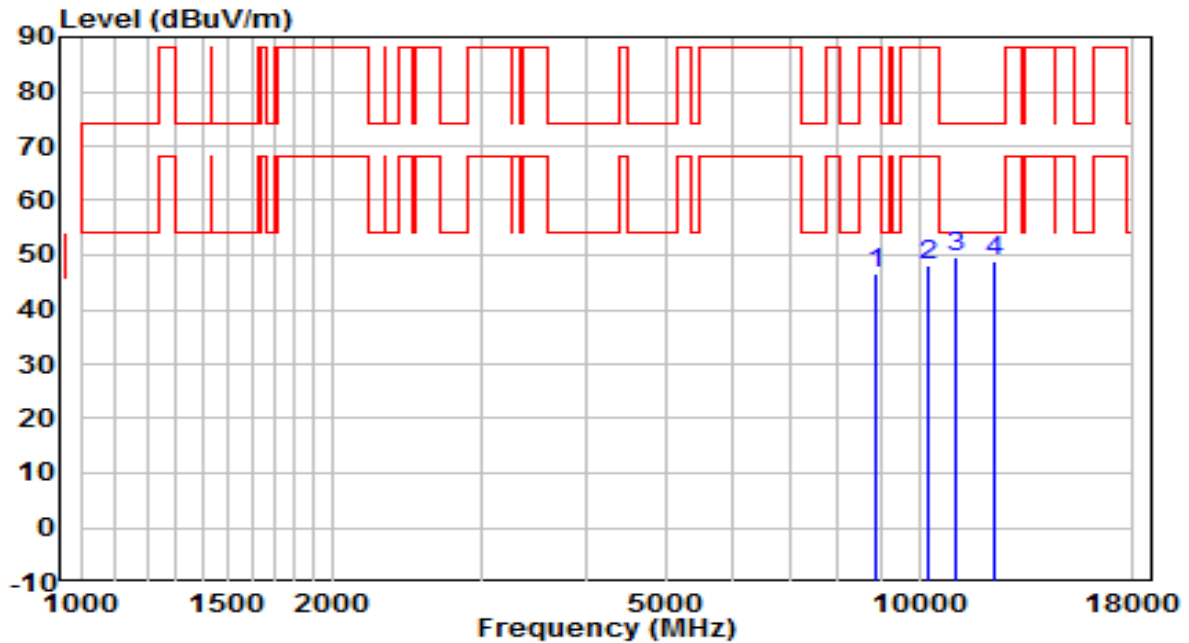


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8905.000	35.41	11.18	46.59	-41.61	88.20	Peak
2	10248.000	34.58	13.48	48.06	-40.14	88.20	Peak
3	* 11081.000	35.77	13.71	49.48	-24.52	74.00	Peak
4	12322.000	36.13	12.74	48.87	-25.13	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6185MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

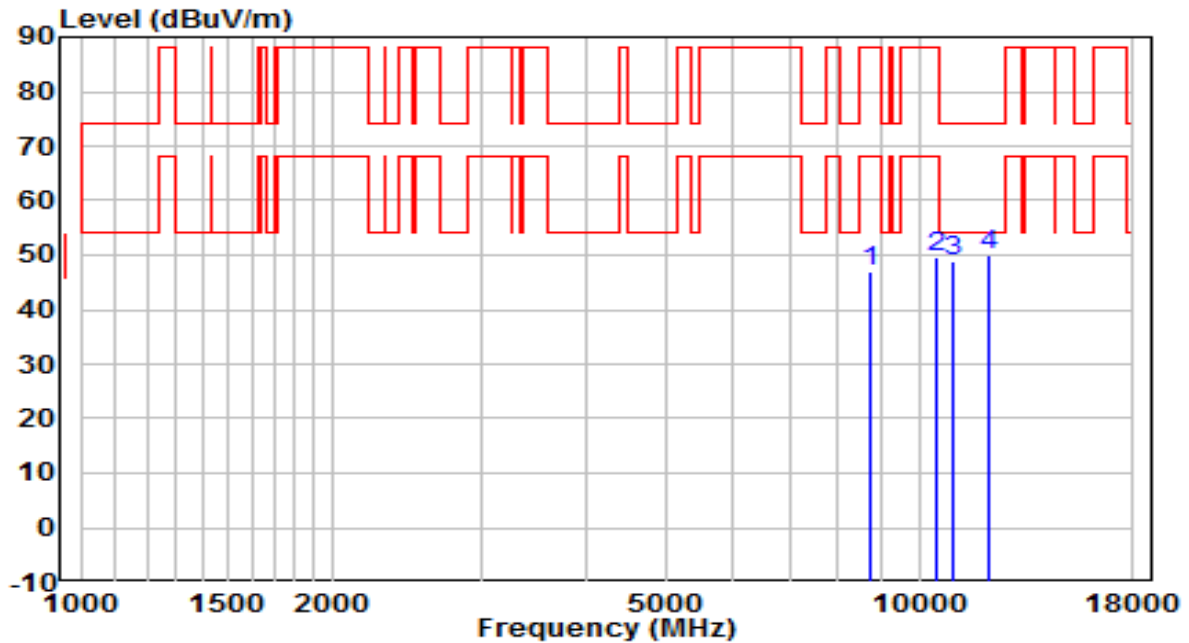


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8769.000	35.78	11.20	46.99	-41.21	88.20	Peak
2	10494.500	36.00	13.77	49.78	-38.42	88.20	Peak
3	10936.500	35.00	13.91	48.91	-25.09	74.00	Peak
4	* 12109.500	37.06	12.79	49.85	-24.15	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6345MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

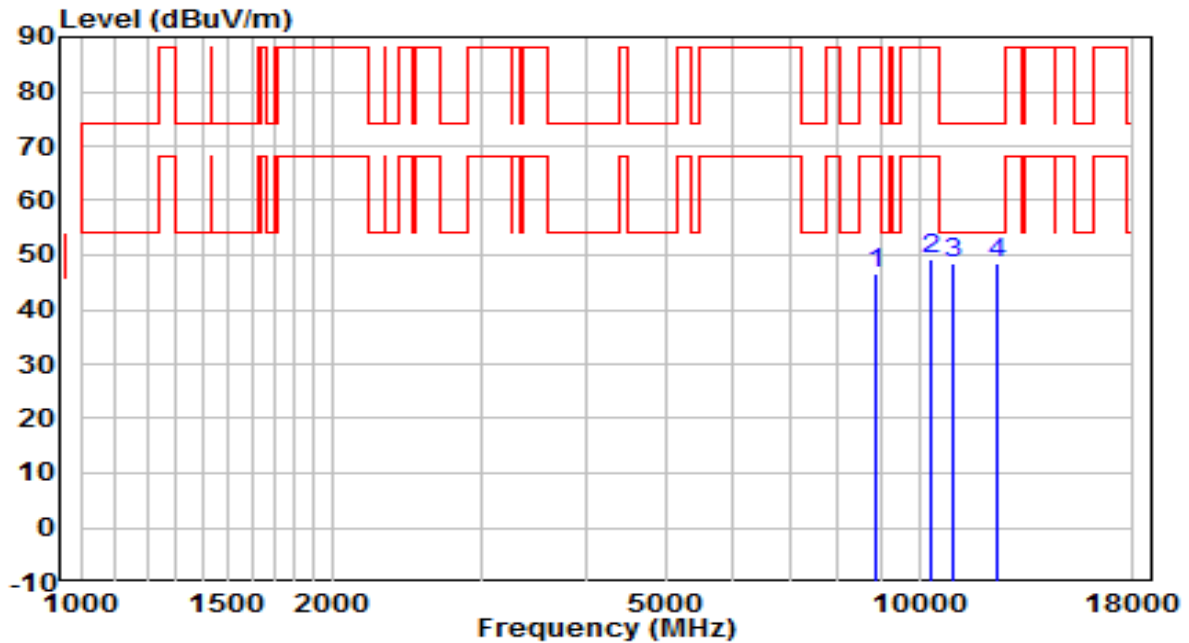


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8896.500	35.34	11.16	46.49	-41.71	88.20	Peak
2	10358.500	35.74	13.56	49.31	-38.89	88.20	Peak
3	11004.500	34.72	13.72	48.44	-25.56	74.00	Peak
4	* 12398.500	35.79	12.68	48.47	-25.53	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6345MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

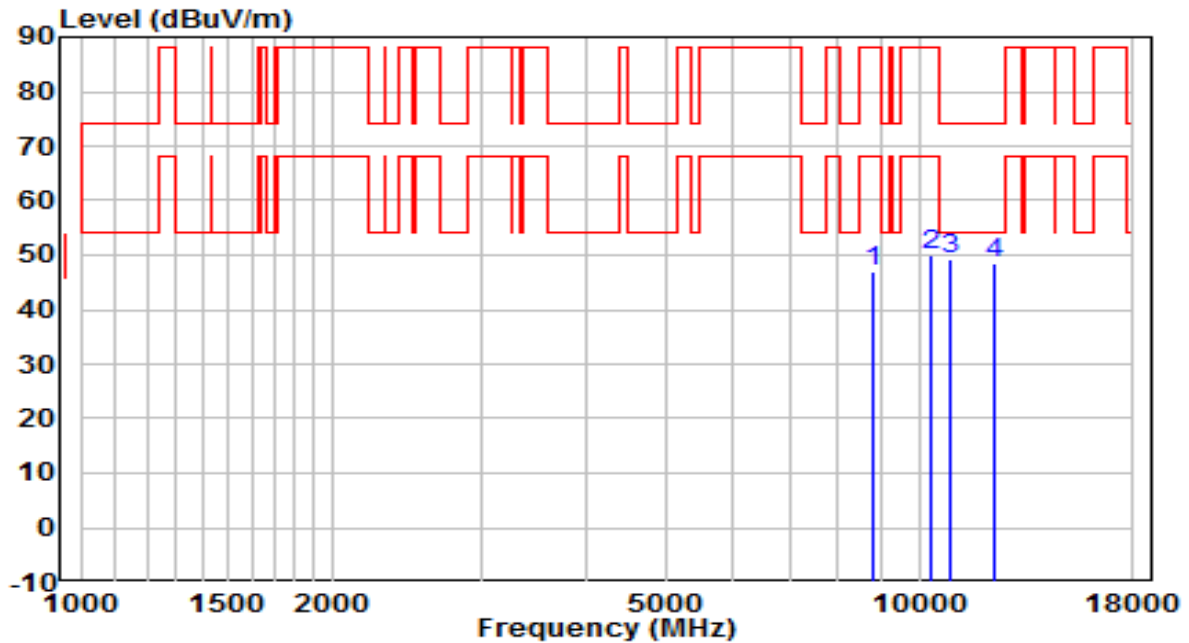


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8803.000	35.92	11.17	47.09	-41.11	88.20	Peak
2	10358.500	36.42	13.56	49.99	-38.21	88.20	Peak
3	* 10902.500	35.64	13.79	49.43	-24.57	74.00	Peak
4	12254.000	35.70	12.92	48.62	-25.38	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6505MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

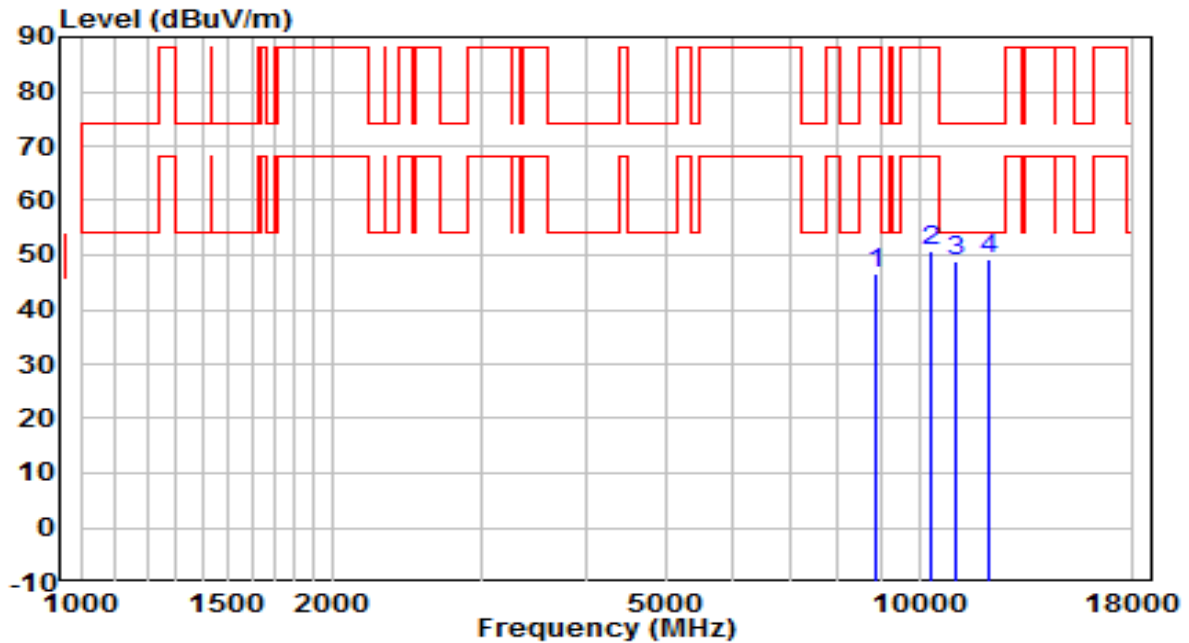


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8888.000	35.57	11.15	46.72	-41.48	88.20	Peak
2	10358.500	37.13	13.56	50.69	-37.51	88.20	Peak
3	11072.500	35.17	13.70	48.87	-25.13	74.00	Peak
4	* 12109.500	36.48	12.79	49.27	-24.73	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6505MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

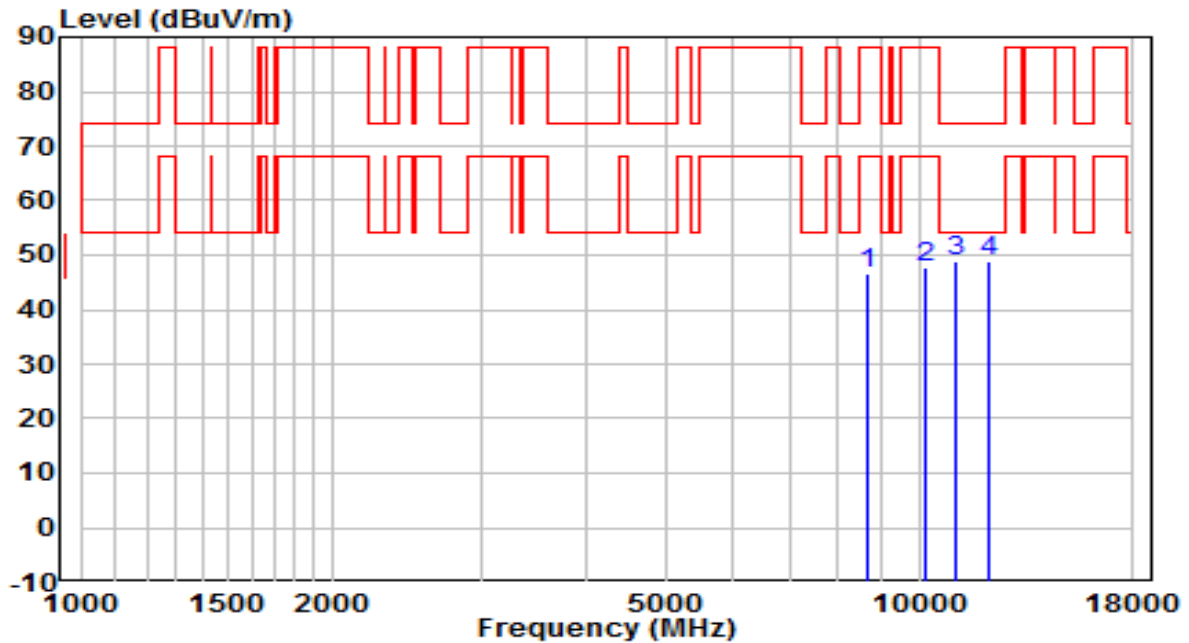


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8667.000	35.87	10.77	46.64	-41.56	88.20	Peak
2	10171.500	34.32	13.42	47.74	-40.46	88.20	Peak
3	* 11030.000	35.30	13.75	49.05	-24.95	74.00	Peak
4	12092.500	36.01	12.95	48.96	-25.04	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6665MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

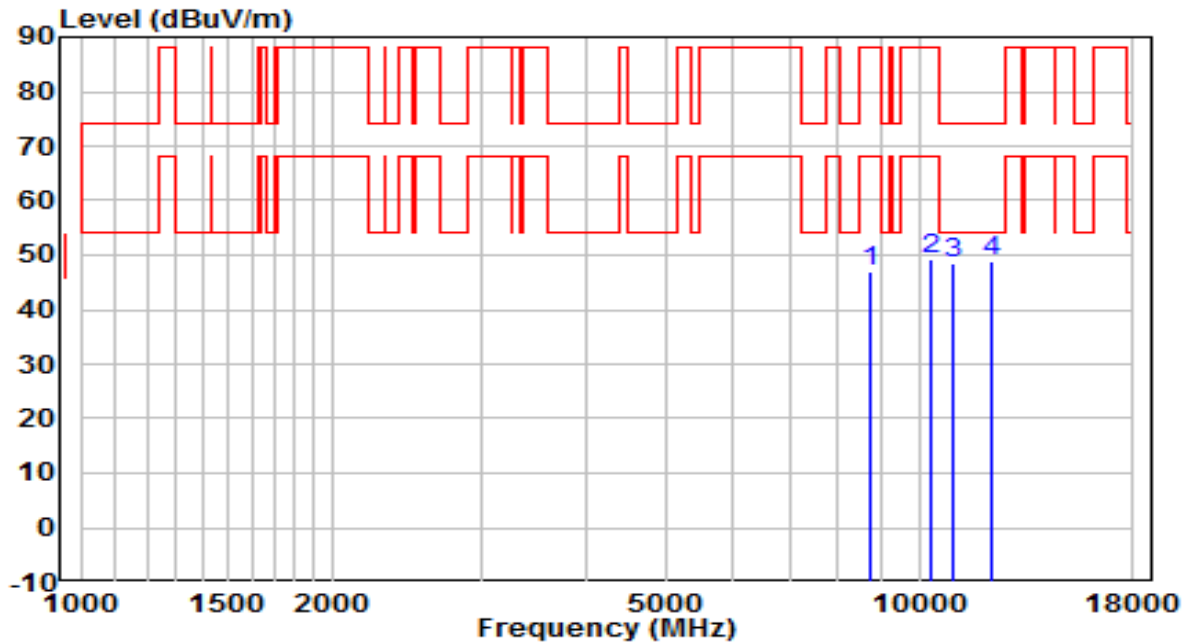


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8769.000	35.60	11.20	46.80	-41.40	88.20	Peak
2	10358.500	35.72	13.56	49.29	-38.91	88.20	Peak
3	10962.000	34.90	13.75	48.65	-25.35	74.00	Peak
4	* 12237.000	35.97	12.98	48.95	-25.05	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6665MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

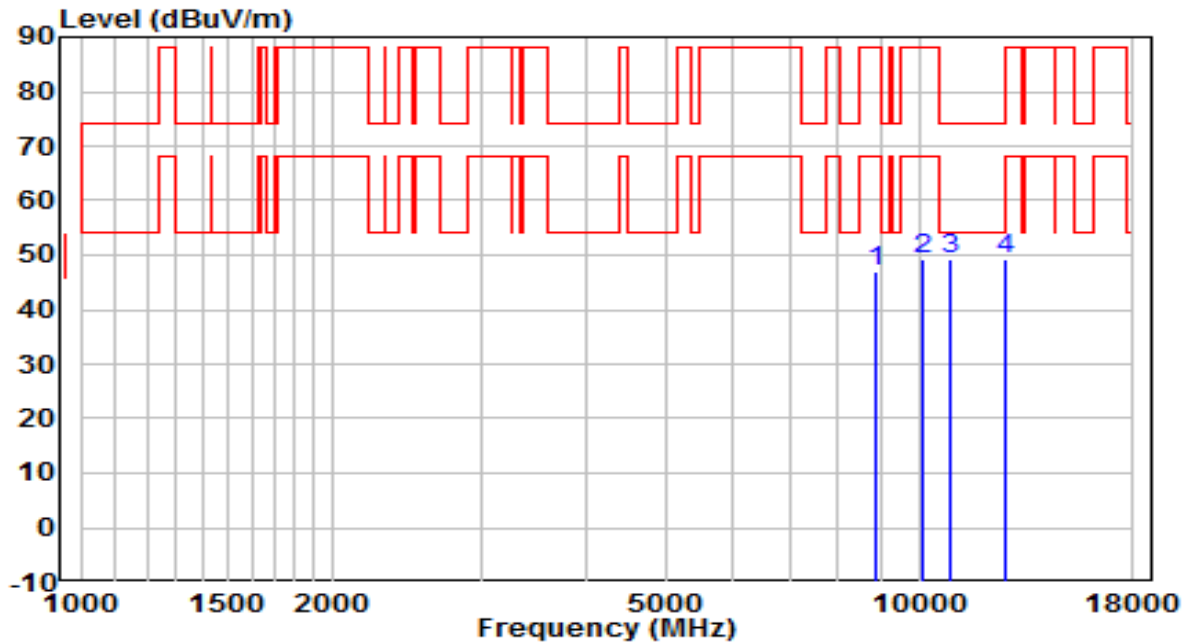


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8862.500	35.49	11.35	46.84	-41.36	88.20	Peak
2	10069.500	36.05	13.19	49.24	-38.96	88.20	Peak
3	* 10868.500	35.52	13.89	49.42	-24.58	74.00	Peak
4	12628.000	36.15	13.02	49.17	-24.83	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6825MHz N <sub>ss</sub> =1	Test Voltage	120V/60Hz

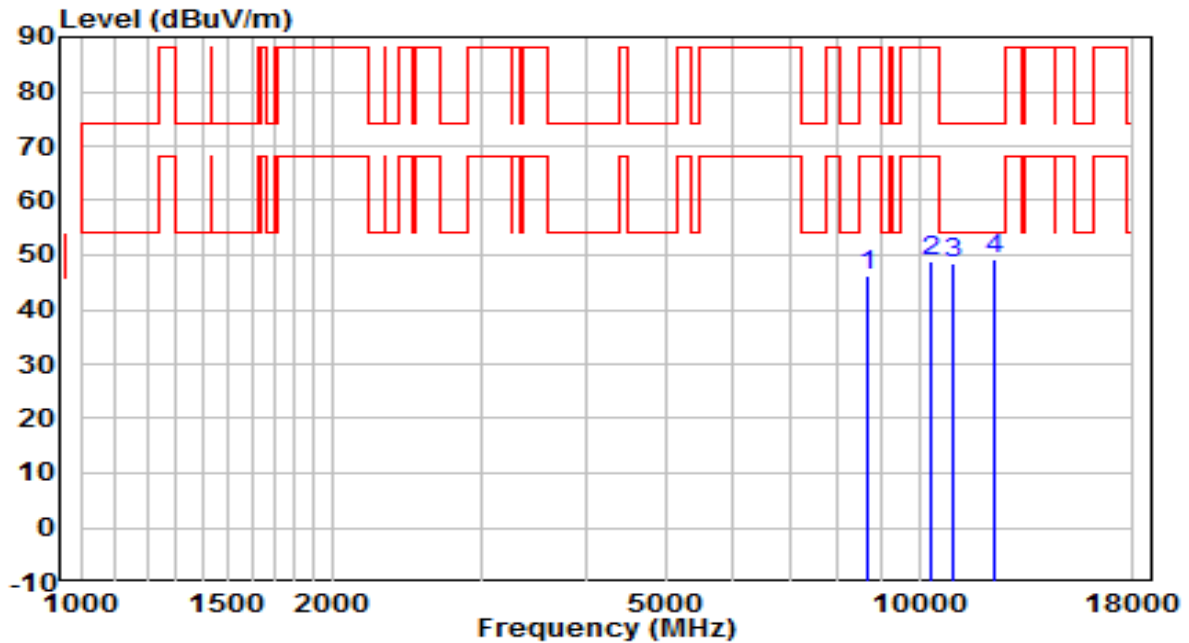


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8675.500	35.36	10.83	46.19	-42.01	88.20	Peak
2	10358.500	35.30	13.56	48.86	-39.34	88.20	Peak
3	11004.500	34.90	13.72	48.62	-25.38	74.00	Peak
4	* 12271.000	36.33	12.74	49.07	-24.93	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6825MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

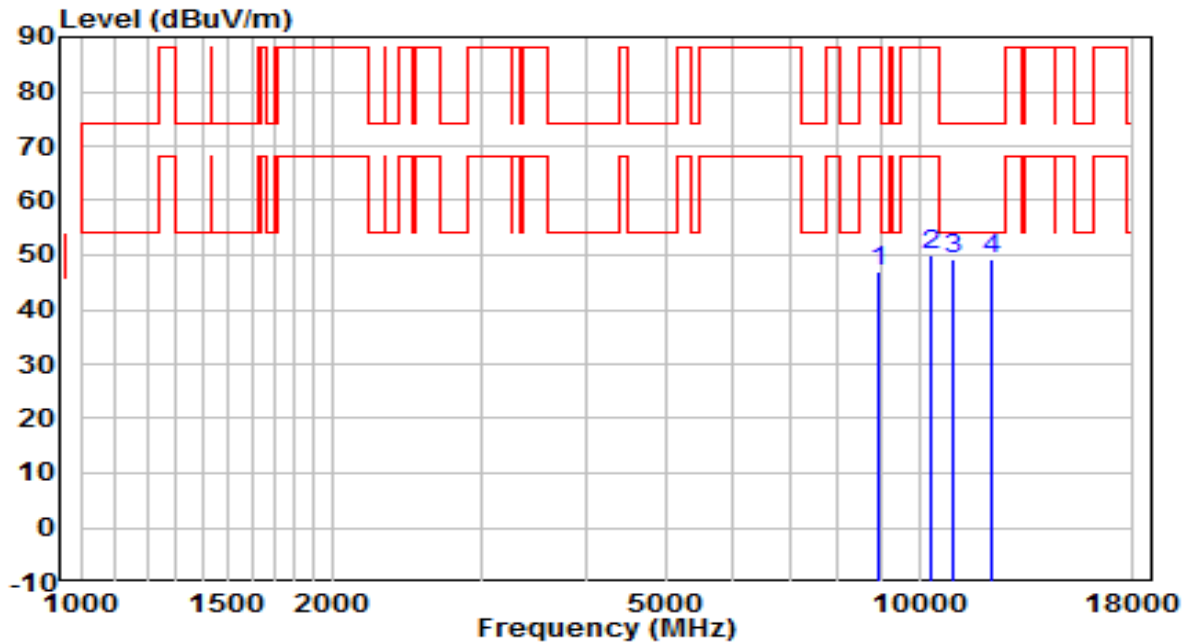


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8930.500	35.72	11.32	47.04	-41.16	88.20	Peak
2	10358.500	36.40	13.56	49.96	-38.24	88.20	Peak
3	10945.000	35.43	13.86	49.28	-24.72	74.00	Peak
4	* 12237.000	36.45	12.98	49.43	-24.57	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

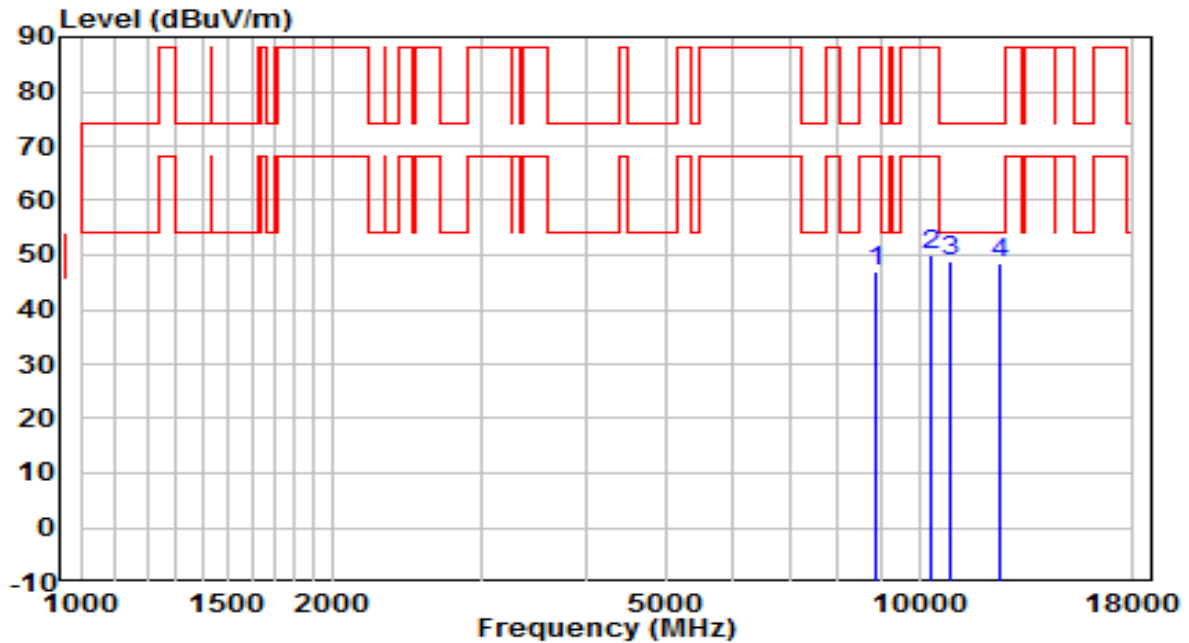


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8888.000	35.87	11.15	47.02	-41.18	88.20	Peak
2	10358.500	36.29	13.56	49.85	-38.35	88.20	Peak
3	* 10911.000	35.17	13.80	48.98	-25.02	74.00	Peak
4	12475.000	36.04	12.61	48.65	-25.35	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

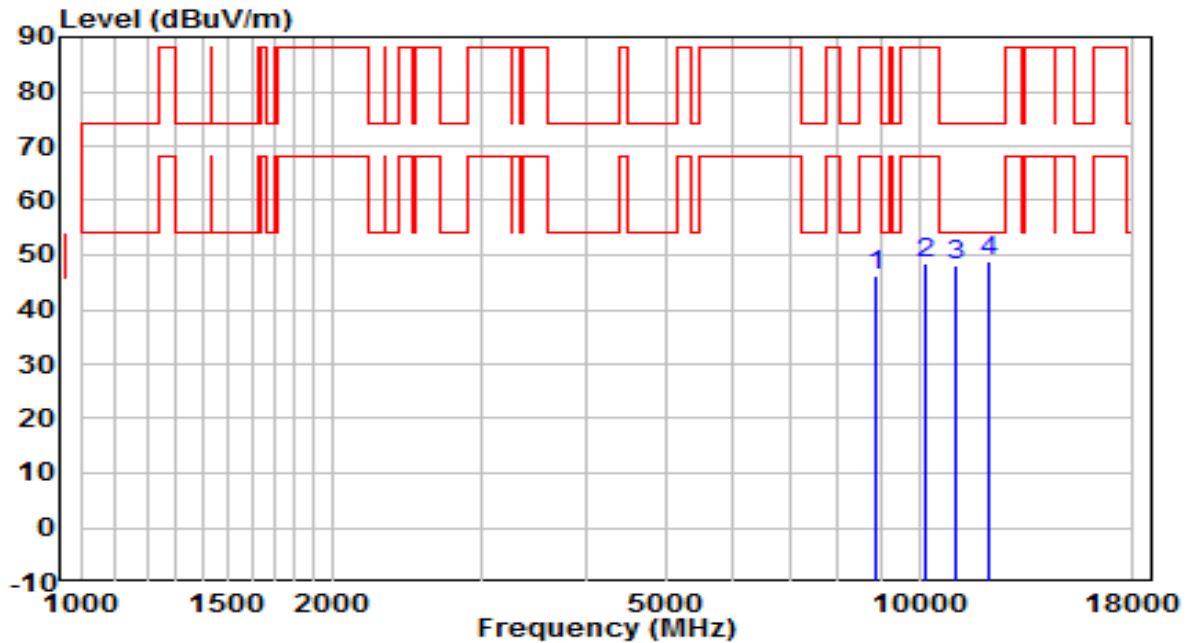


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8888.000	35.15	11.15	46.31	-41.89	88.20	Peak
2	10180.000	35.10	13.48	48.59	-39.61	88.20	Peak
3	11072.500	34.54	13.70	48.24	-25.76	74.00	Peak
4	* 12092.500	35.97	12.95	48.92	-25.08	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

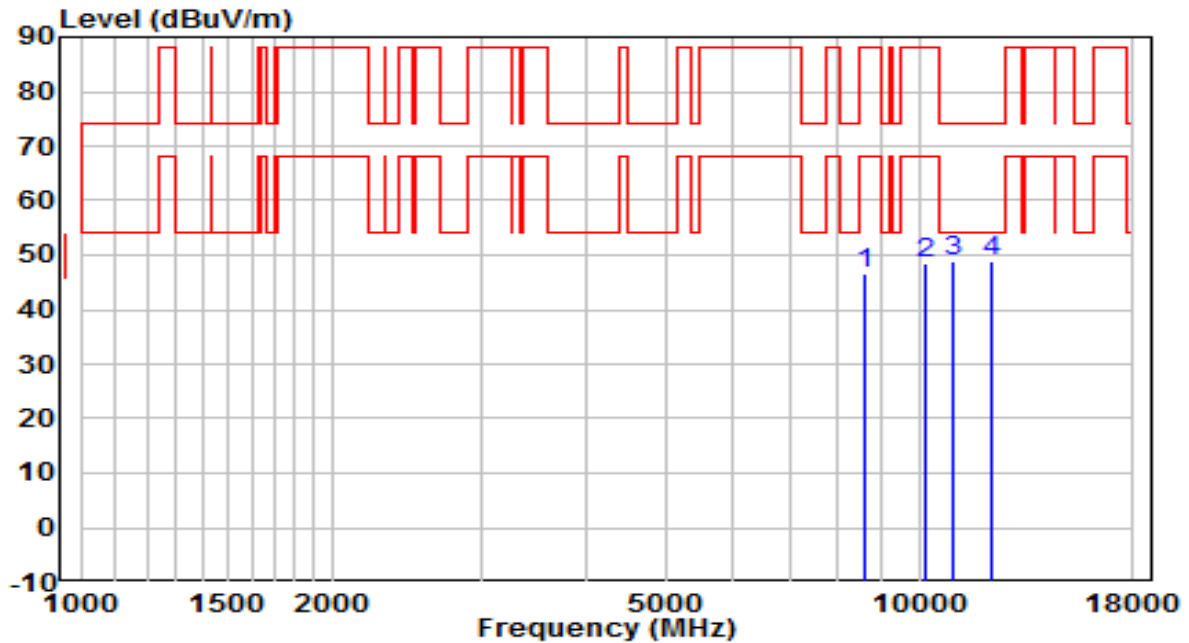


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8599.000	36.20	10.50	46.70	-41.50	88.20	Peak
2	10197.000	35.38	13.14	48.52	-39.68	88.20	Peak
3	* 11004.500	35.10	13.72	48.82	-25.18	74.00	Peak
4	12186.000	35.74	12.97	48.71	-25.29	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

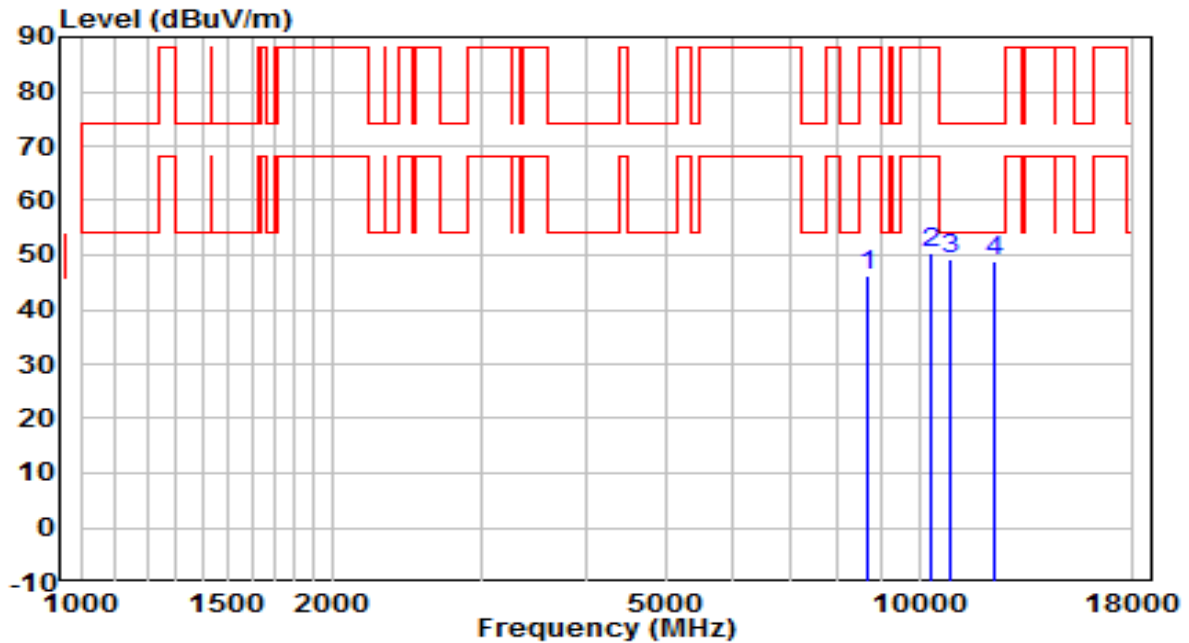


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8675.500	35.47	10.83	46.30	-41.90	88.20	Peak
2	10358.500	36.92	13.56	50.48	-37.72	88.20	Peak
3	* 10868.500	35.25	13.89	49.14	-24.86	74.00	Peak
4	12296.500	35.91	12.91	48.82	-25.18	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6195MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

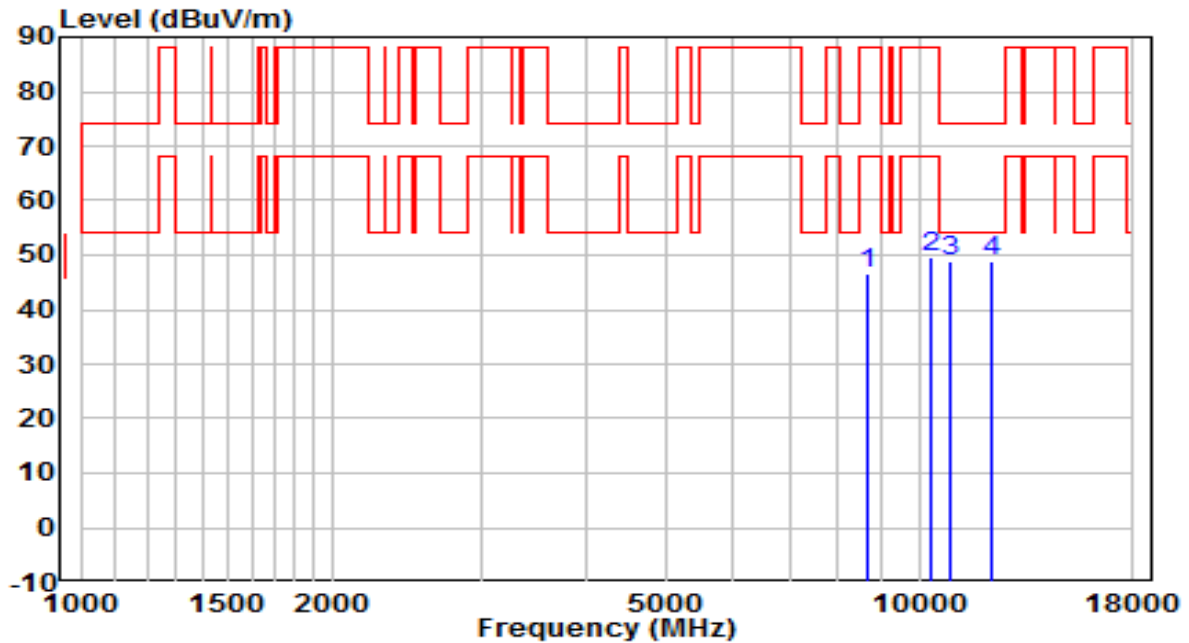


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8684.000	35.87	10.86	46.73	-41.47	88.20	Peak
2	10358.500	36.04	13.56	49.60	-38.60	88.20	Peak
3	* 10902.500	35.25	13.79	49.05	-24.95	74.00	Peak
4	12203.000	35.98	12.99	48.97	-25.03	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6195MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

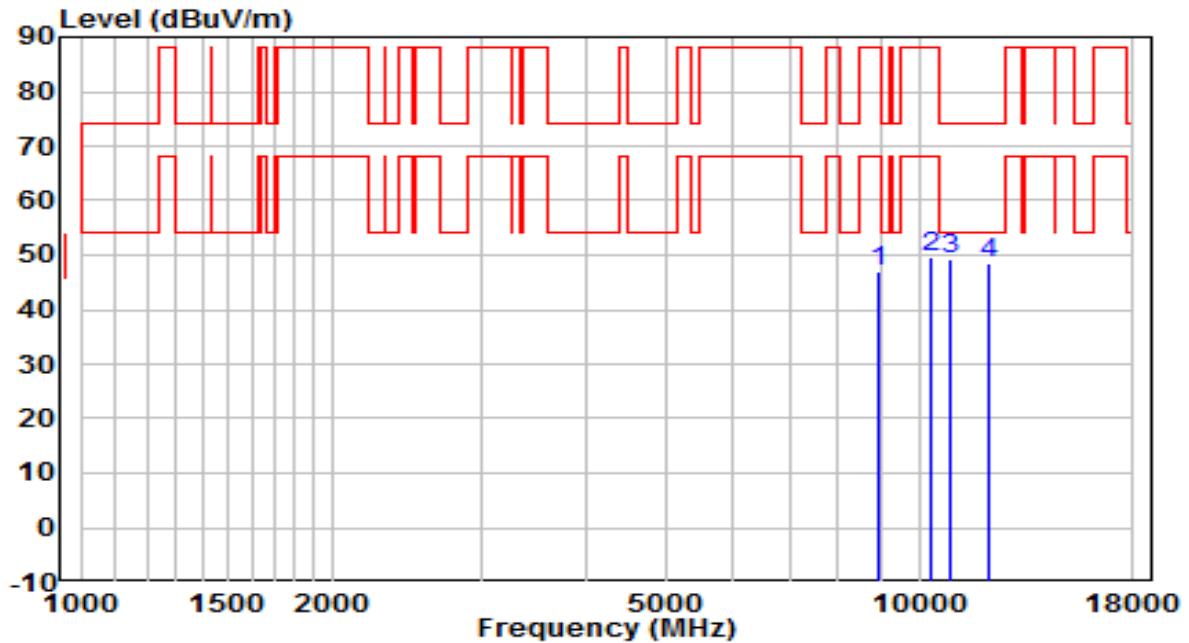


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8930.500	35.82	11.32	47.15	-41.05	88.20	Peak
2	10358.500	35.99	13.56	49.55	-38.65	88.20	Peak
3	* 10885.500	35.17	13.90	49.07	-24.93	74.00	Peak
4	12067.000	35.62	12.82	48.44	-25.56	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6415MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

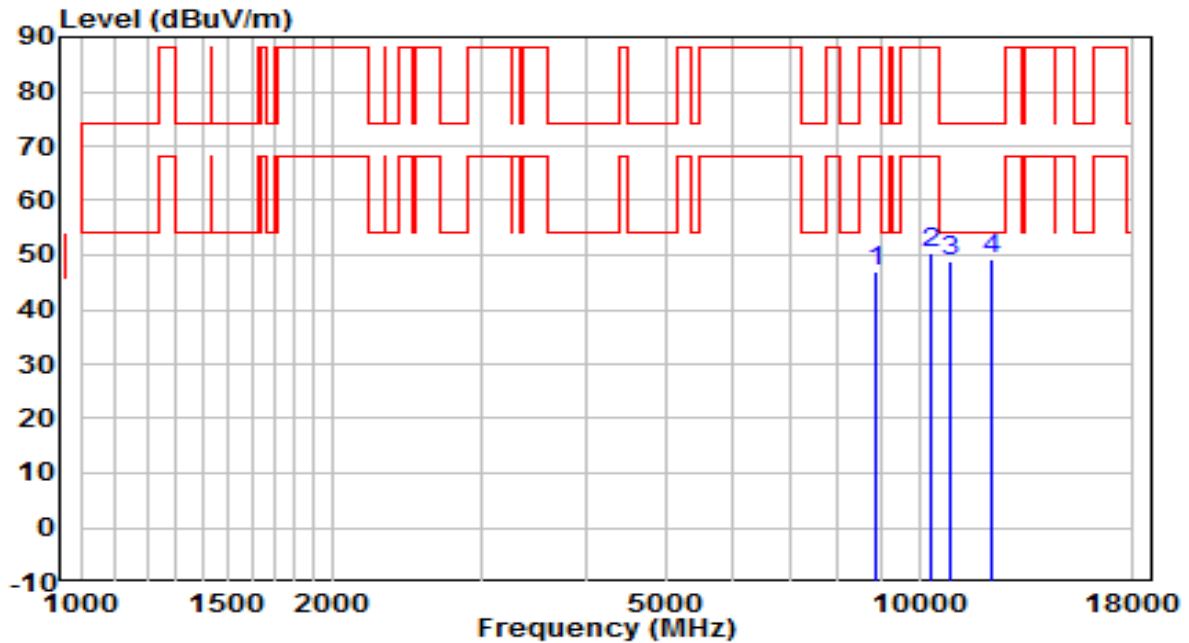


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8871.000	35.42	11.42	46.84	-41.36	88.20	Peak
2	10358.500	36.73	13.56	50.29	-37.91	88.20	Peak
3	10928.000	34.91	13.88	48.79	-25.21	74.00	Peak
4	* 12245.500	36.09	12.99	49.08	-24.92	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6415MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

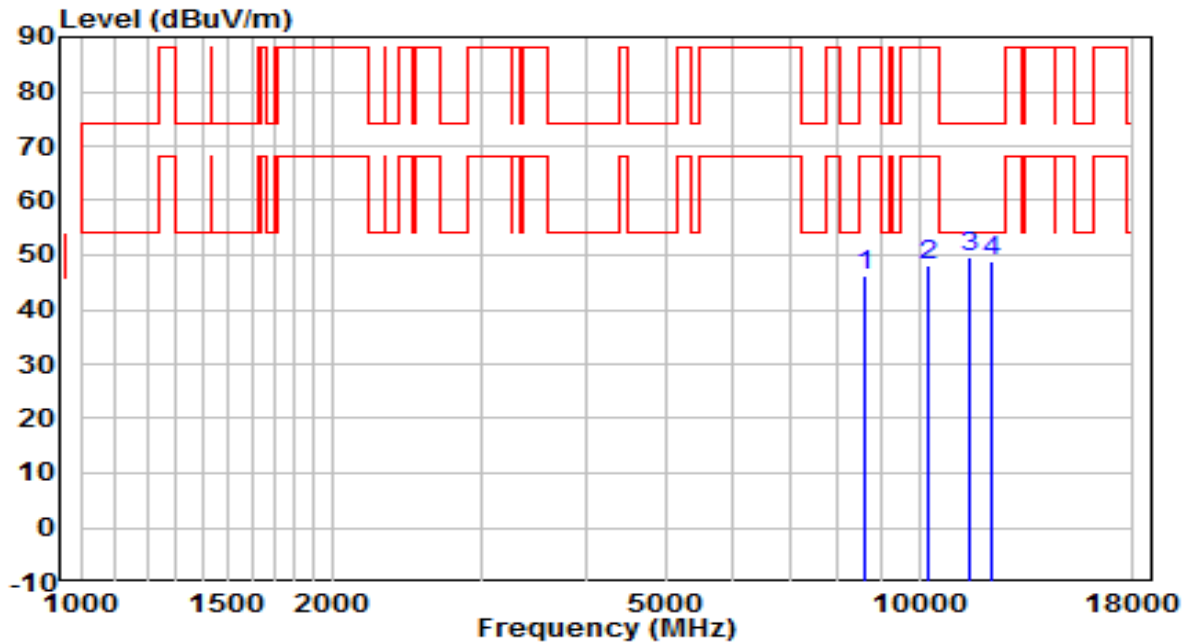


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8624.500	35.62	10.67	46.28	-41.92	88.20	Peak
2	10265.000	34.59	13.38	47.96	-40.24	88.20	Peak
3	* 11506.000	36.41	13.29	49.70	-24.30	74.00	Peak
4	12245.500	35.86	12.99	48.85	-25.15	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6435MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

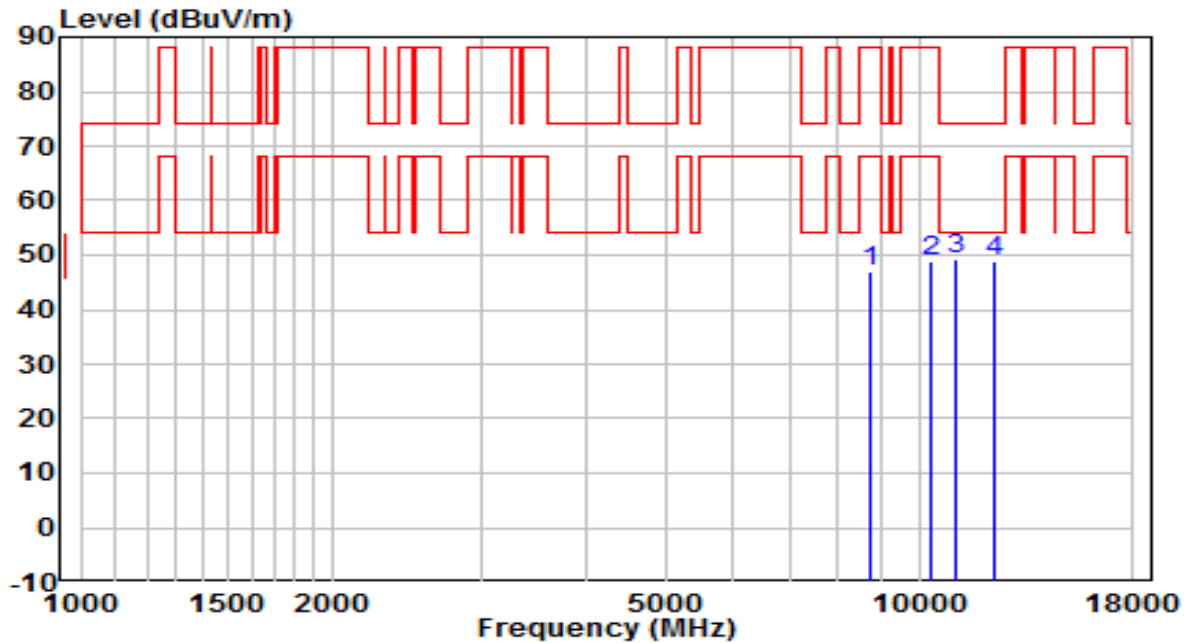


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8726.500	35.88	10.95	46.82	-41.38	88.20	Peak
2	10358.500	35.36	13.56	48.92	-39.28	88.20	Peak
3	* 11038.500	35.65	13.76	49.41	-24.59	74.00	Peak
4	12339.000	36.19	12.77	48.96	-25.04	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6435MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

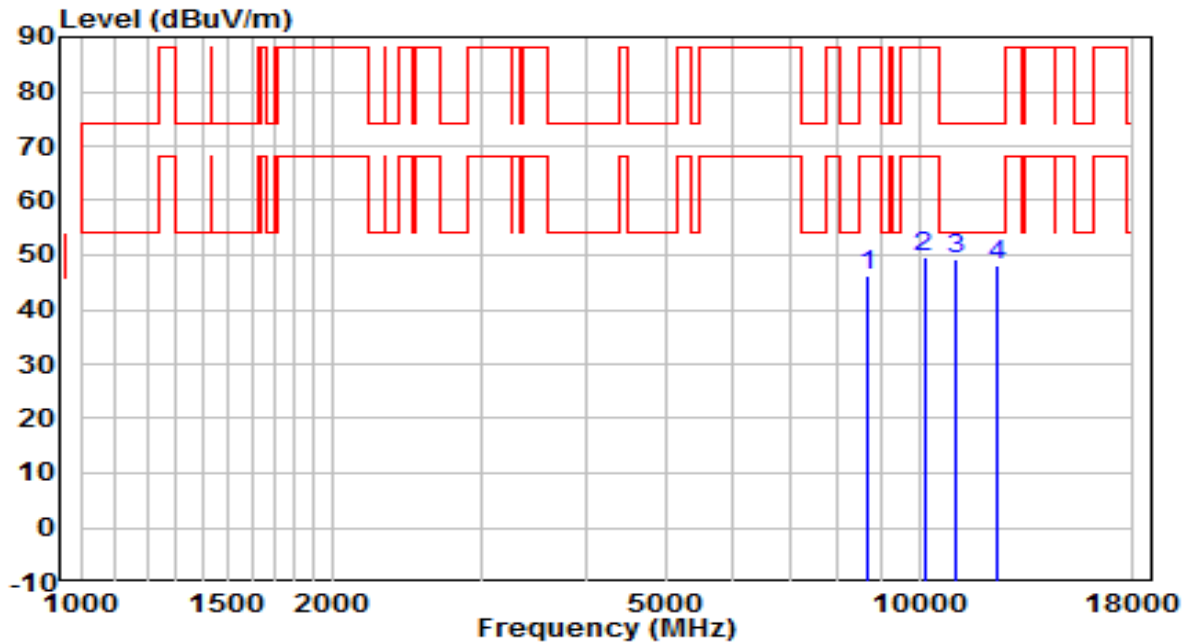


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8675.500	35.54	10.83	46.36	-41.84	88.20	Peak
2	10137.500	36.25	13.27	49.52	-38.68	88.20	Peak
3	* 11038.500	35.59	13.76	49.35	-24.65	74.00	Peak
4	12407.000	35.58	12.70	48.28	-25.72	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6475MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

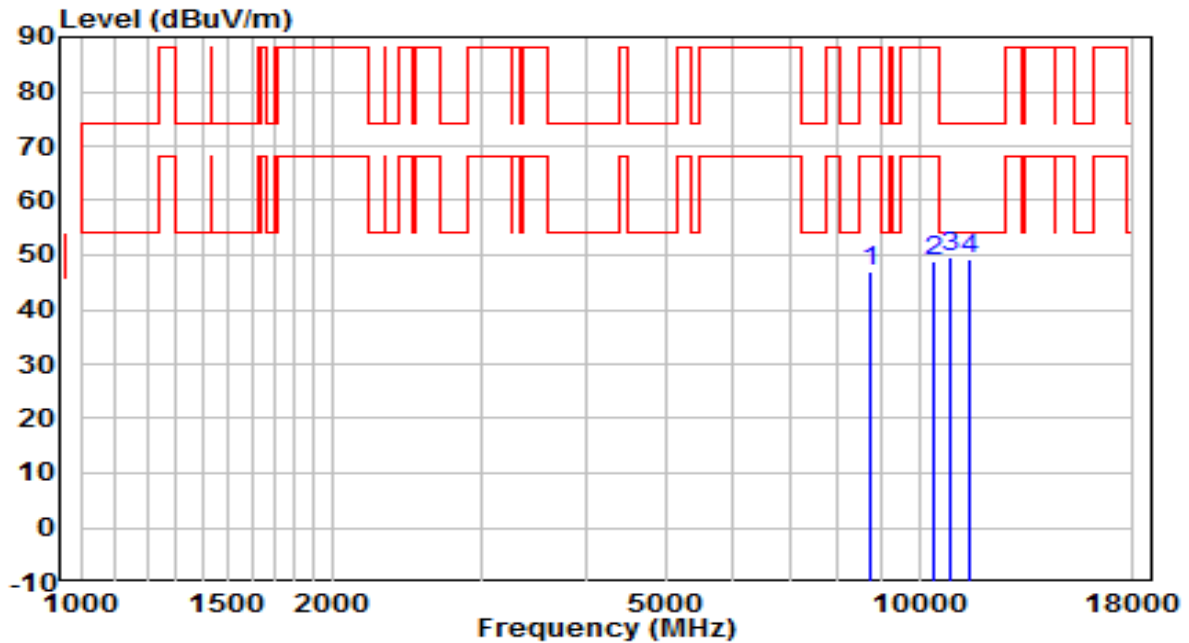


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8760.500	35.94	11.15	47.10	-41.10	88.20	Peak
2	10426.500	34.99	13.75	48.74	-39.46	88.20	Peak
3	* 10919.500	35.92	13.82	49.74	-24.26	74.00	Peak
4	11489.000	36.01	13.42	49.43	-24.57	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6475MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

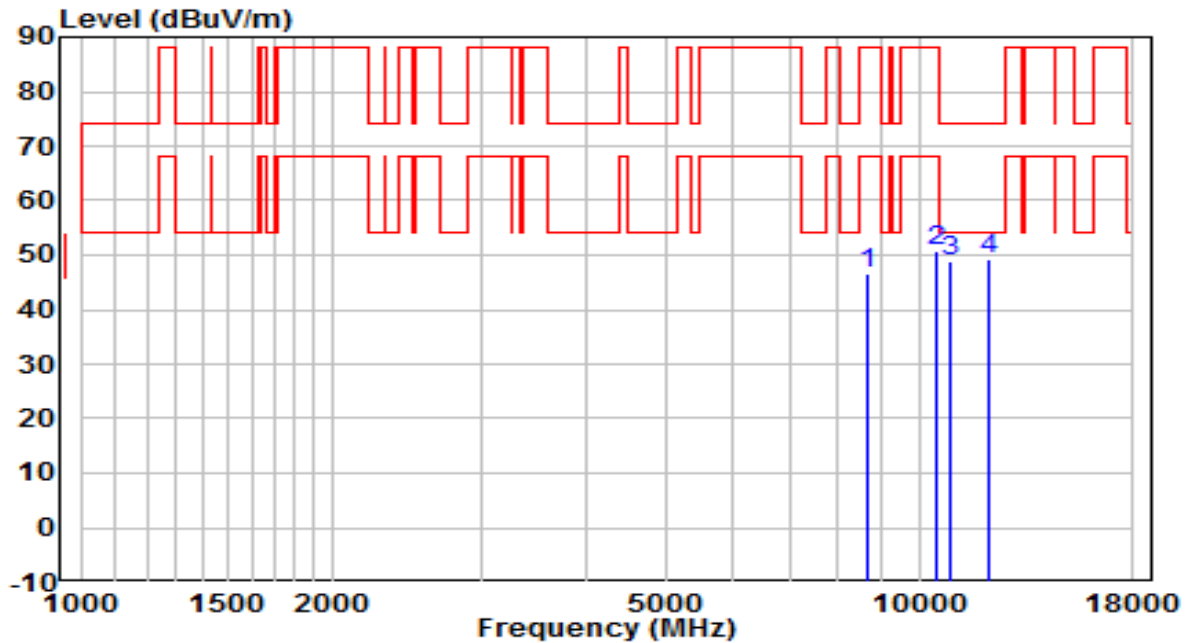


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8692.500	35.72	10.88	46.60	-41.60	88.20	Peak
2	10477.500	36.87	13.88	50.75	-37.45	88.20	Peak
3	10928.000	34.98	13.88	48.86	-25.14	74.00	Peak
4	* 12118.000	36.61	12.76	49.37	-24.63	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6515MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

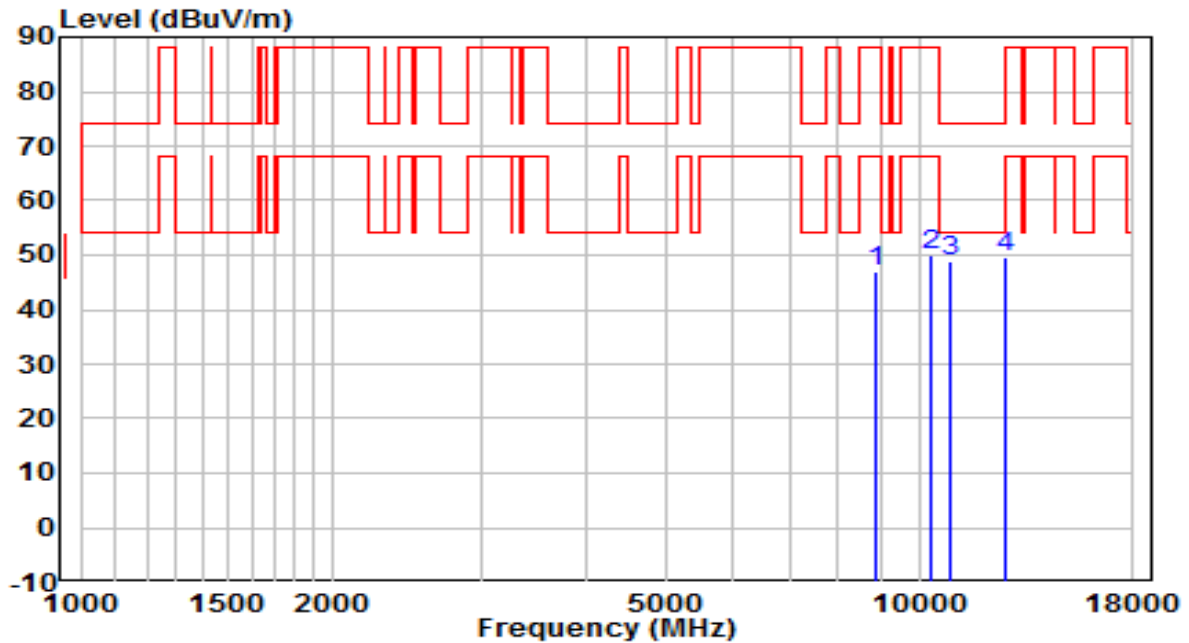


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8871.000	35.74	11.42	47.16	-41.04	88.20	Peak
2	10358.500	36.56	13.56	50.12	-38.08	88.20	Peak
3	10928.000	34.83	13.88	48.71	-25.29	74.00	Peak
4	* 12645.000	36.40	13.27	49.67	-24.33	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6515MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

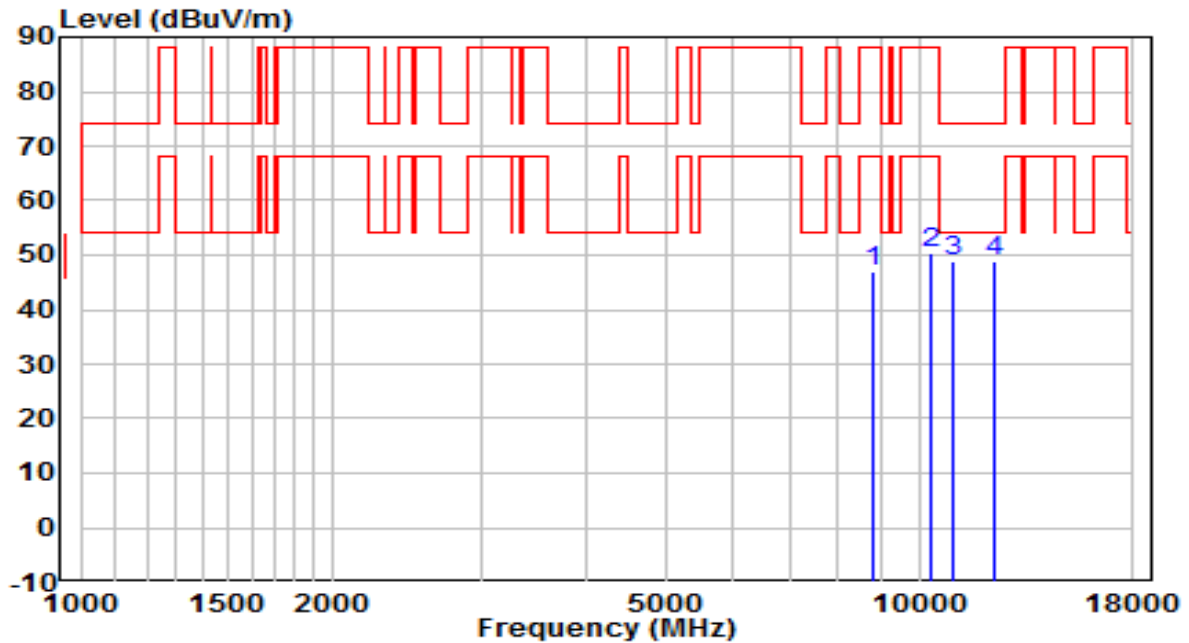


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8786.000	35.86	11.16	47.02	-41.18	88.20	Peak
2	10358.500	36.81	13.56	50.38	-37.82	88.20	Peak
3	10945.000	35.02	13.86	48.88	-25.12	74.00	Peak
4	* 12305.000	35.99	12.90	48.89	-25.11	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6535MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

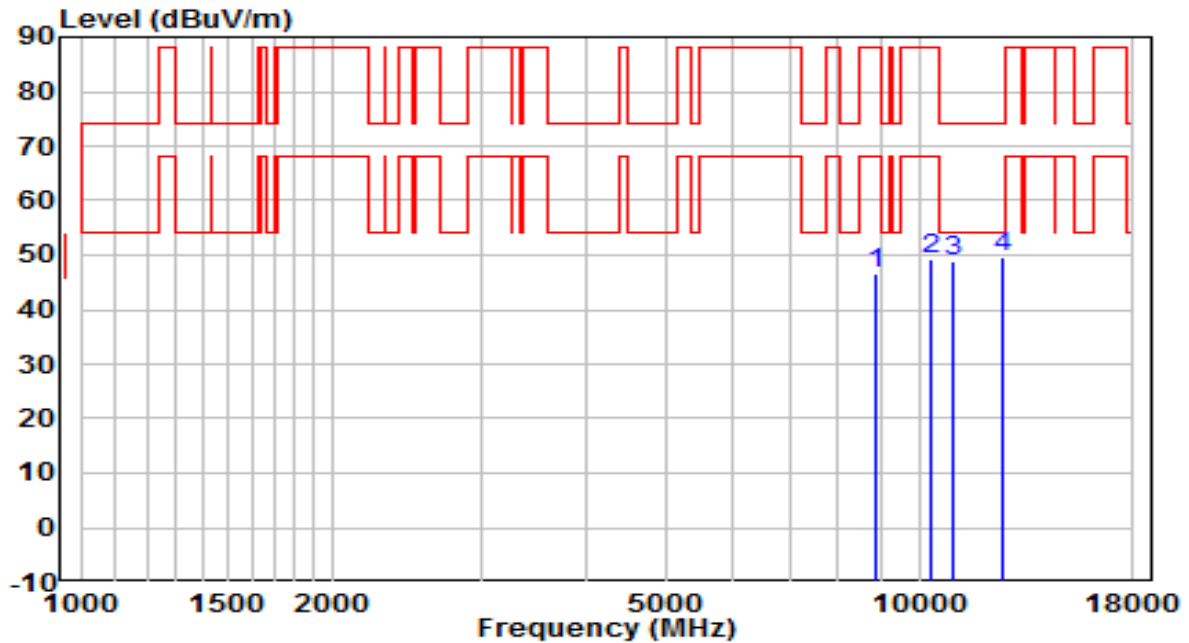


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8862.500	35.10	11.35	46.45	-41.75	88.20	Peak
2	10358.500	35.80	13.56	49.36	-38.84	88.20	Peak
3	11004.500	35.32	13.72	49.04	-24.96	74.00	Peak
4	* 12602.500	36.43	13.03	49.46	-24.54	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6535MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

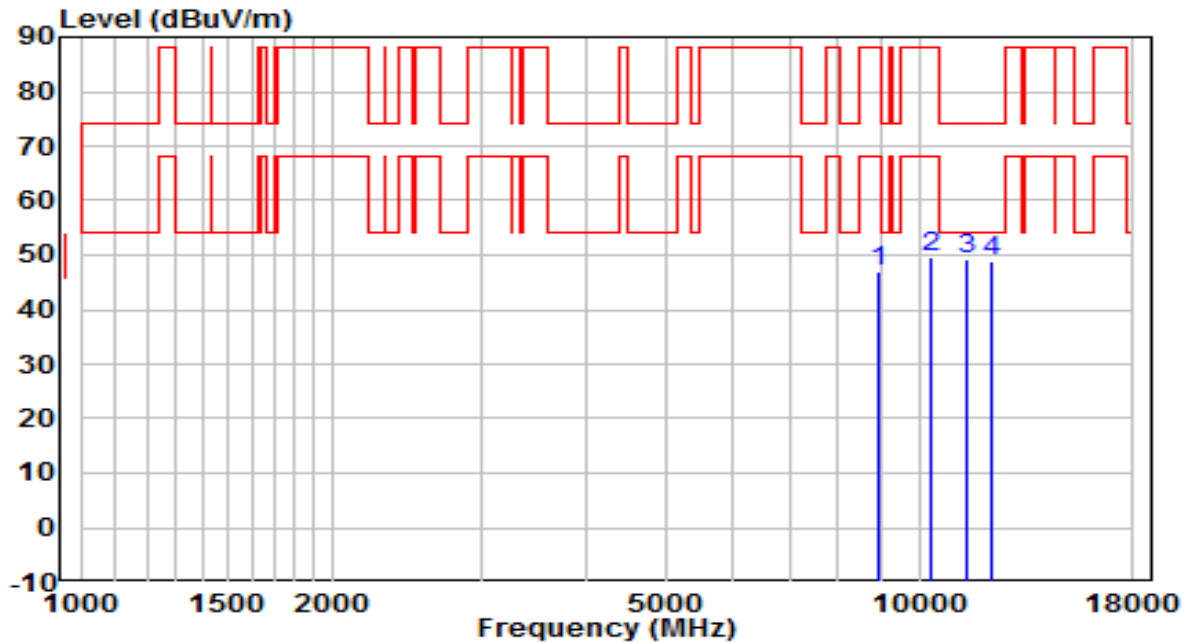


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8922.000	35.58	11.34	46.92	-41.28	88.20	Peak
2	10358.500	36.04	13.56	49.61	-38.59	88.20	Peak
3	* 11438.000	35.77	13.52	49.29	-24.71	74.00	Peak
4	12237.000	36.04	12.98	49.02	-24.98	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6715MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

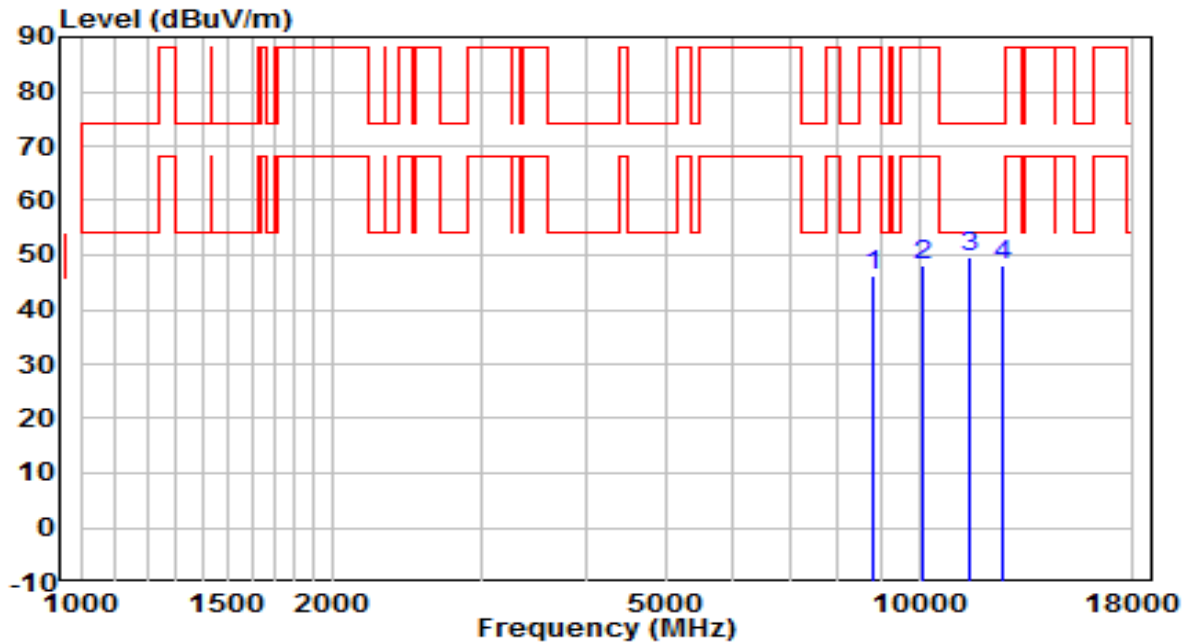


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8820.000	35.06	11.19	46.26	-41.94	88.20	Peak
2	10129.000	34.65	13.30	47.95	-40.25	88.20	Peak
3	* 11489.000	36.30	13.42	49.71	-24.29	74.00	Peak
4	12534.500	35.40	12.89	48.29	-25.71	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6715MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

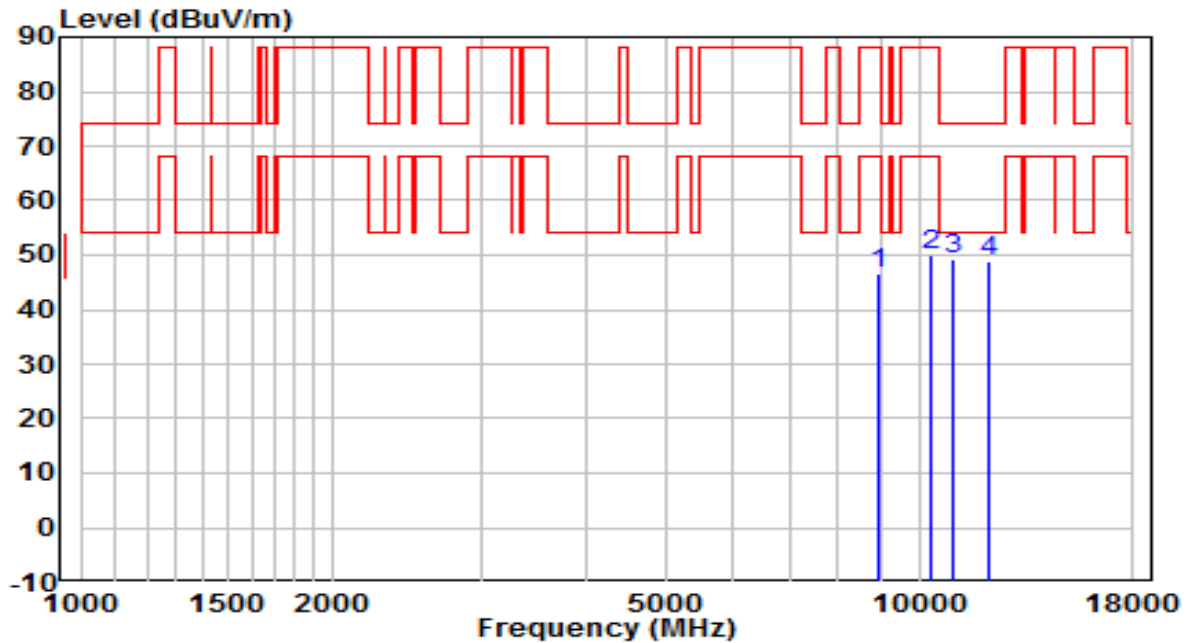


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8913.500	35.26	11.26	46.52	-41.68	88.20	Peak
2	10358.500	36.25	13.56	49.81	-38.39	88.20	Peak
3	* 11004.500	35.36	13.72	49.08	-24.92	74.00	Peak
4	12067.000	35.87	12.82	48.69	-25.31	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6855MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

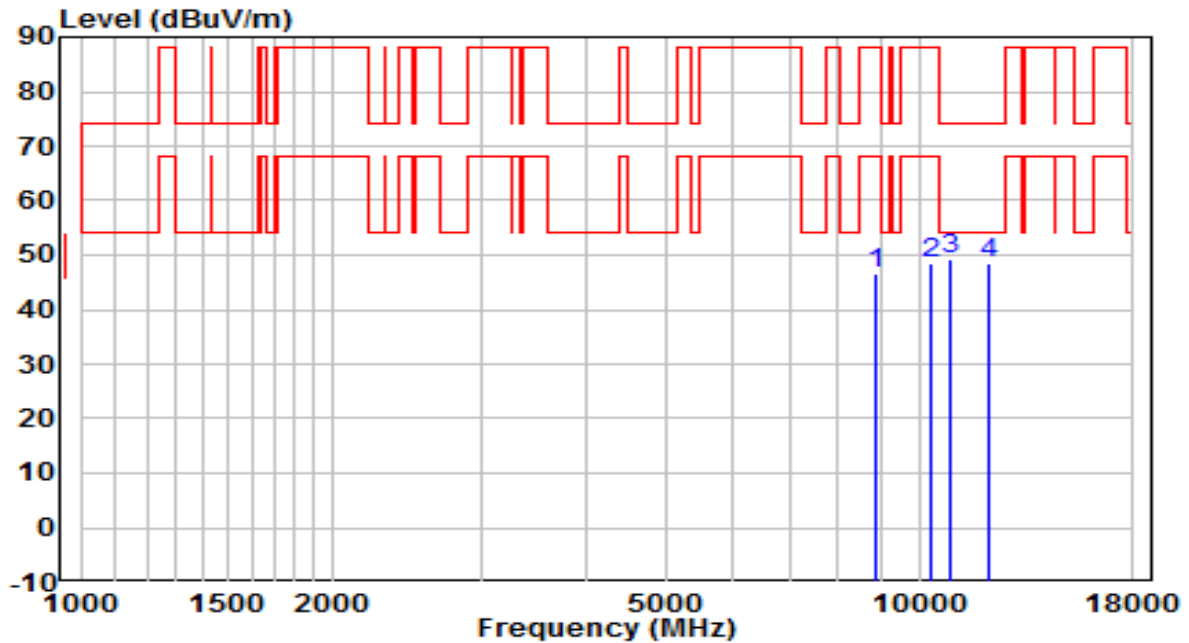


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8896.500	35.42	11.16	46.58	-41.62	88.20	Peak
2	10358.500	35.01	13.56	48.57	-39.63	88.20	Peak
3	* 10928.000	35.50	13.88	49.38	-24.62	74.00	Peak
4	12143.500	35.61	12.94	48.55	-25.45	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6855MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

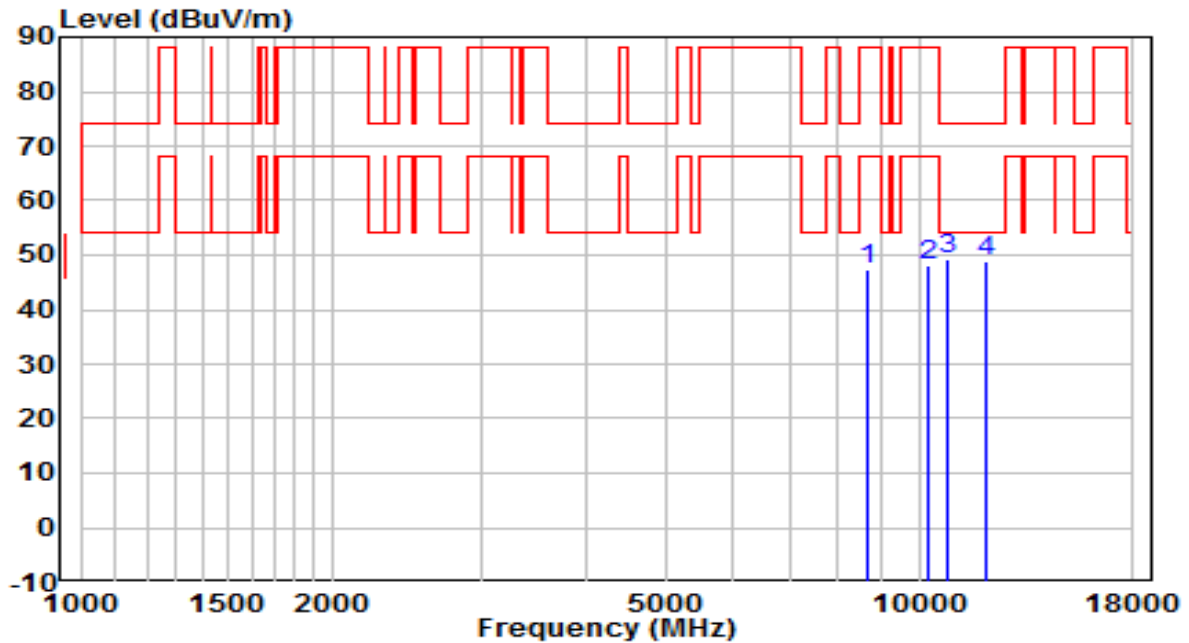


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8650.000	36.53	10.71	47.24	-40.96	88.20	Peak
2	10222.500	34.67	13.34	48.02	-40.18	88.20	Peak
3	* 10826.000	35.14	13.92	49.06	-24.94	74.00	Peak
4	12041.500	36.18	12.73	48.91	-25.09	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6875MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

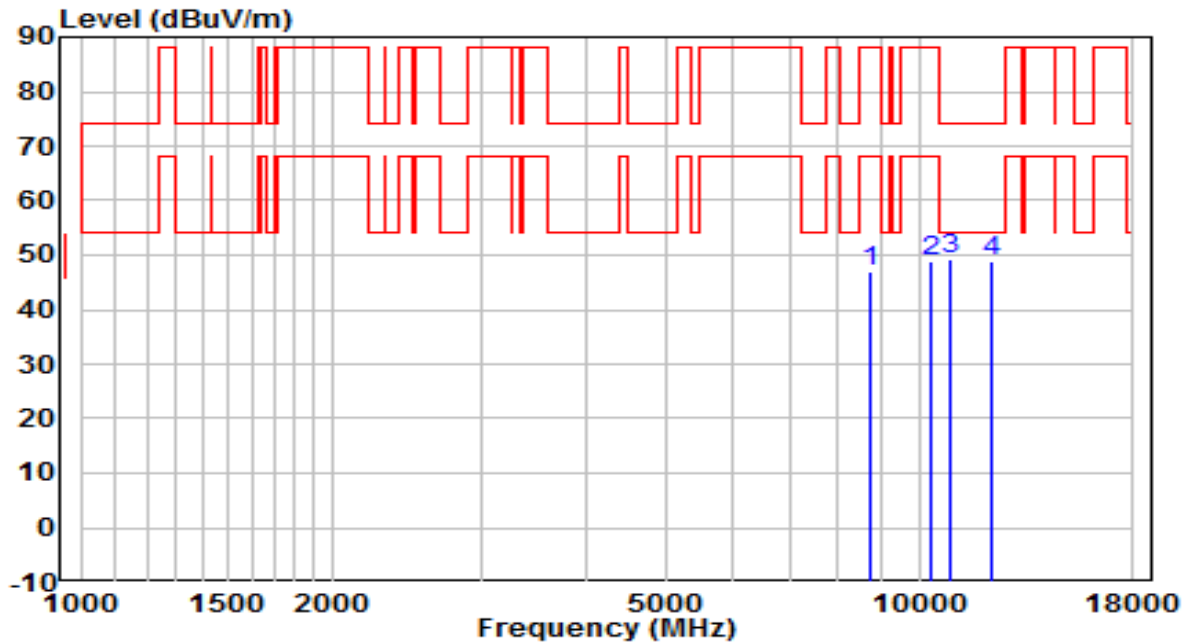


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8735.000	36.20	10.93	47.13	-41.07	88.20	Peak
2	10358.500	35.40	13.56	48.97	-39.23	88.20	Peak
3	* 10868.500	35.41	13.89	49.30	-24.70	74.00	Peak
4	12228.500	35.90	12.95	48.85	-25.15	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6875MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

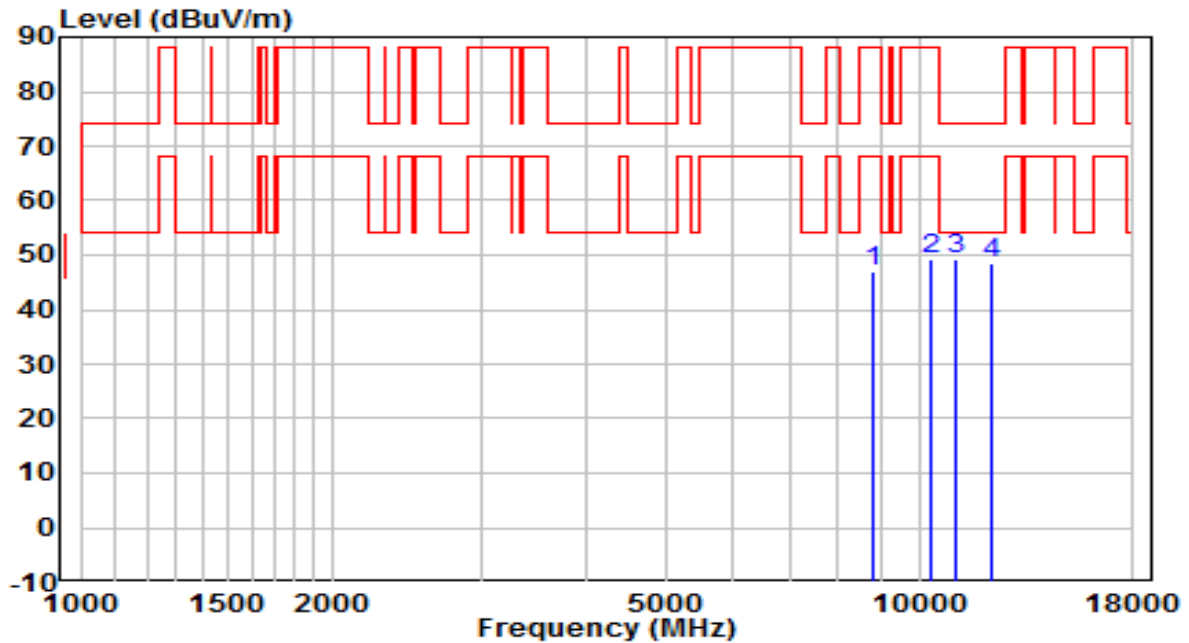


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8820.000	35.90	11.19	47.10	-41.10	88.20	Peak
2	10358.500	35.54	13.56	49.11	-39.09	88.20	Peak
3	* 11030.000	35.55	13.75	49.30	-24.70	74.00	Peak
4	12160.500	35.53	12.84	48.37	-25.63	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6895MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

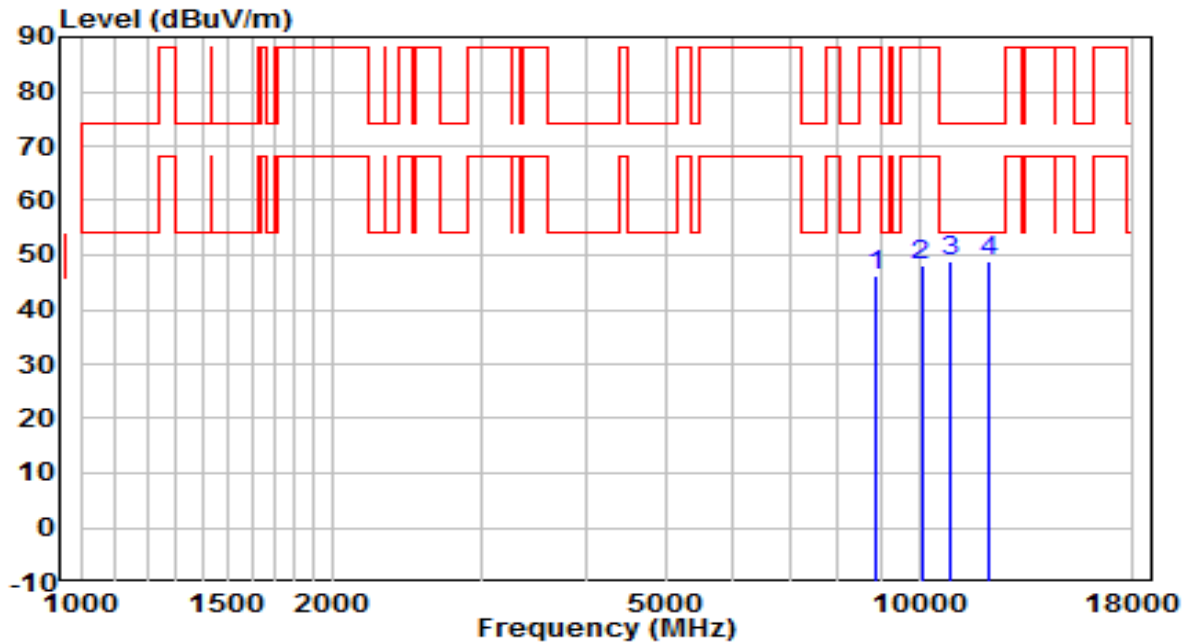


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8871.000	34.82	11.42	46.24	-41.96	88.20	Peak
2	10061.000	35.08	12.97	48.06	-40.14	88.20	Peak
3	10902.500	35.01	13.79	48.80	-25.20	74.00	Peak
4	* 12118.000	36.12	12.76	48.88	-25.12	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 6895MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

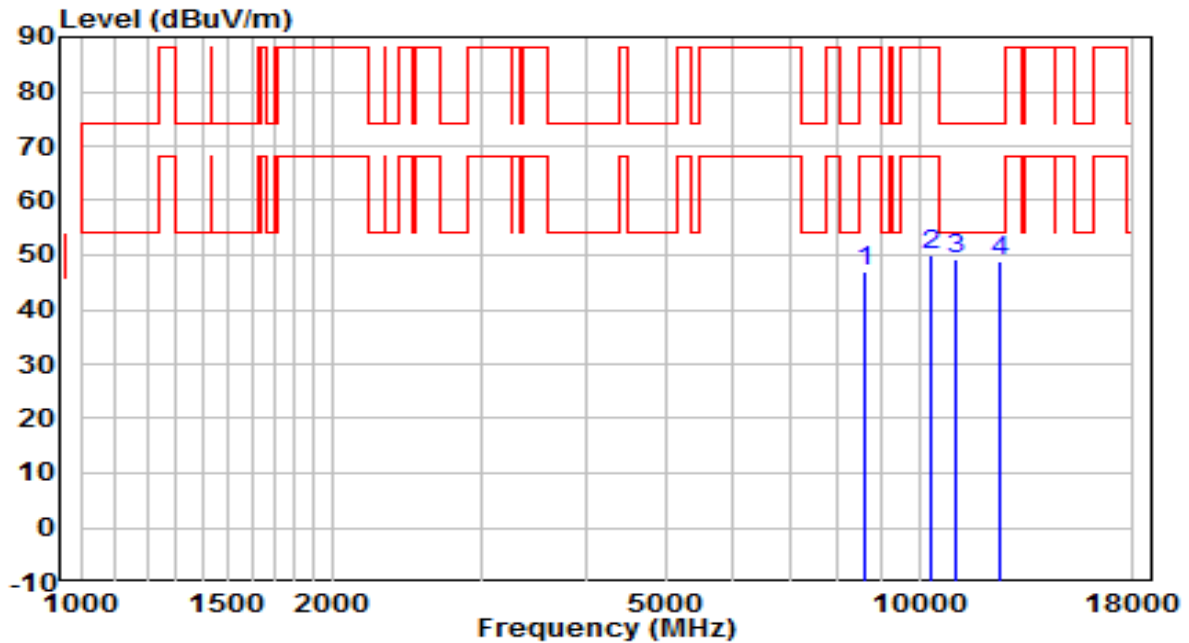


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8607.500	36.55	10.56	47.11	-41.09	88.20	Peak
2	10341.500	36.35	13.57	49.92	-38.28	88.20	Peak
3	* 11064.000	35.63	13.69	49.32	-24.68	74.00	Peak
4	12466.500	36.39	12.62	49.01	-24.99	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7015MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

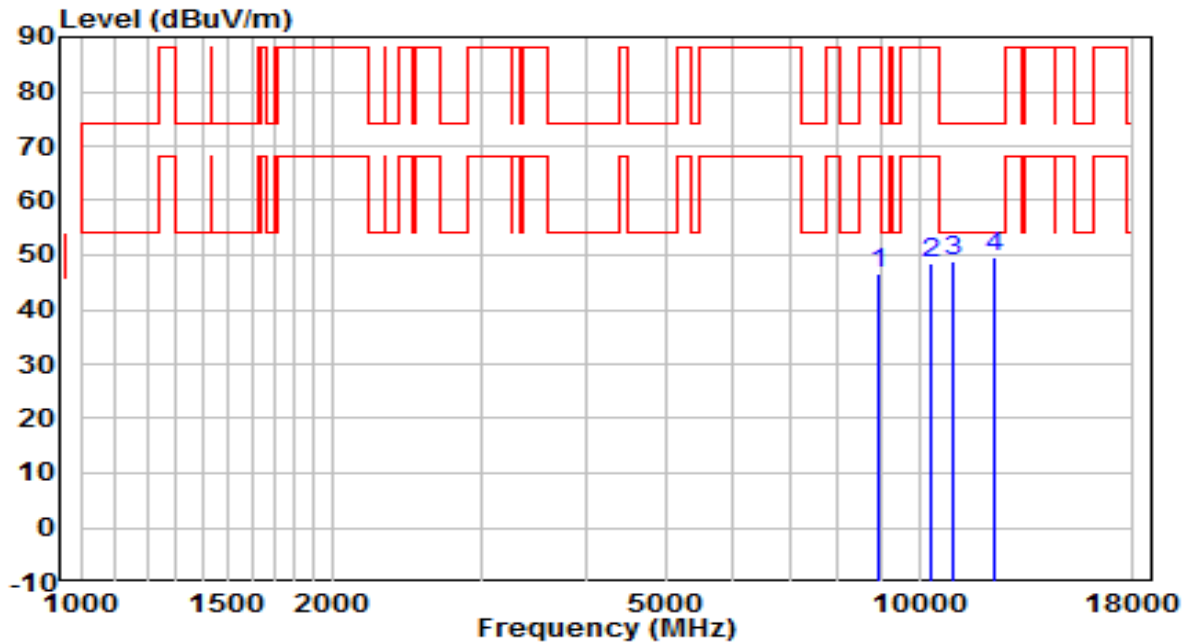


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8930.500	35.36	11.32	46.69	-41.51	88.20	Peak
2	10358.500	35.03	13.56	48.60	-39.60	88.20	Peak
3	10970.500	35.31	13.72	49.03	-24.97	74.00	Peak
4	* 12330.500	36.98	12.76	49.74	-24.26	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7015MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

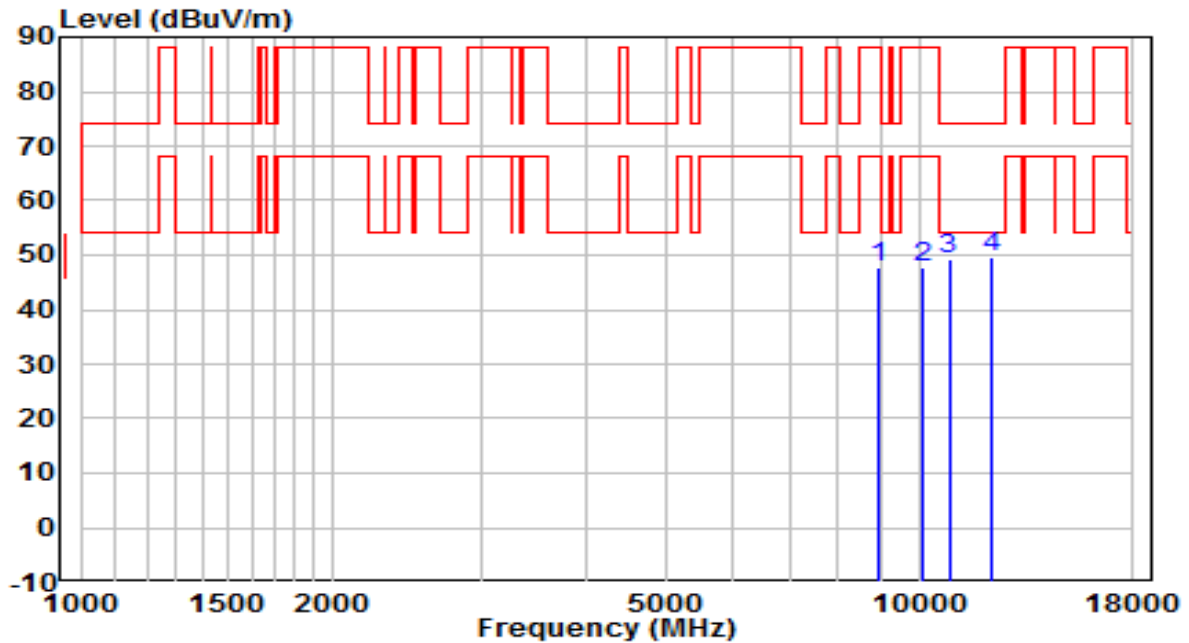


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8930.500	36.40	11.32	47.72	-40.48	88.20	Peak
2	10129.000	34.61	13.30	47.91	-40.29	88.20	Peak
3	10851.500	35.23	13.88	49.12	-24.88	74.00	Peak
4	* 12160.500	36.67	12.84	49.51	-24.49	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

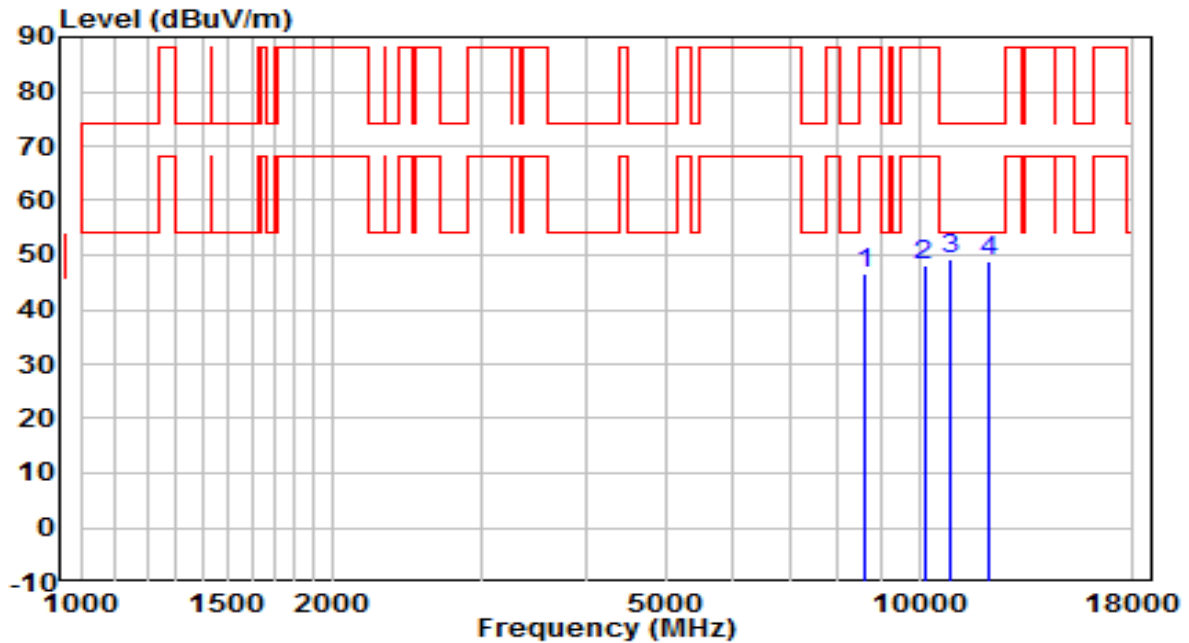


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8616.000	35.92	10.65	46.57	-41.63	88.20	Peak
2	10137.500	34.73	13.27	48.00	-40.20	88.20	Peak
3	* 10877.000	35.24	13.91	49.14	-24.86	74.00	Peak
4	12118.000	36.03	12.76	48.79	-25.21	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

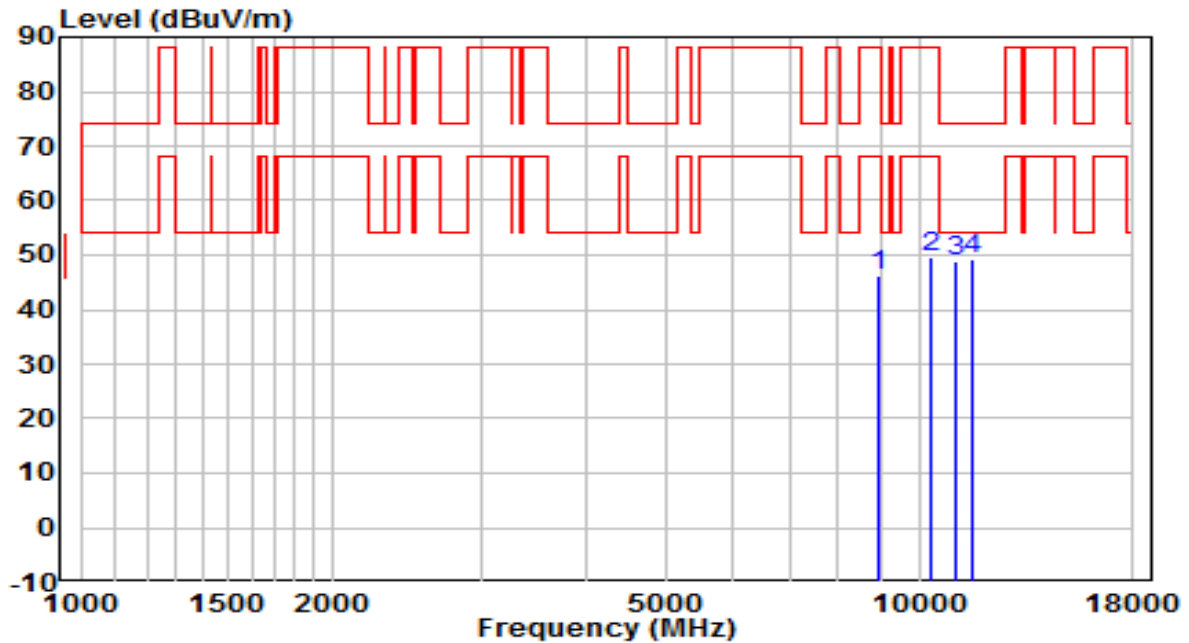


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8939.000	34.90	11.24	46.14	-42.06	88.20	Peak
2	10358.500	36.16	13.56	49.72	-38.48	88.20	Peak
3	11055.500	35.17	13.72	48.89	-25.11	74.00	Peak
4	* 11591.000	36.25	13.08	49.33	-24.67	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

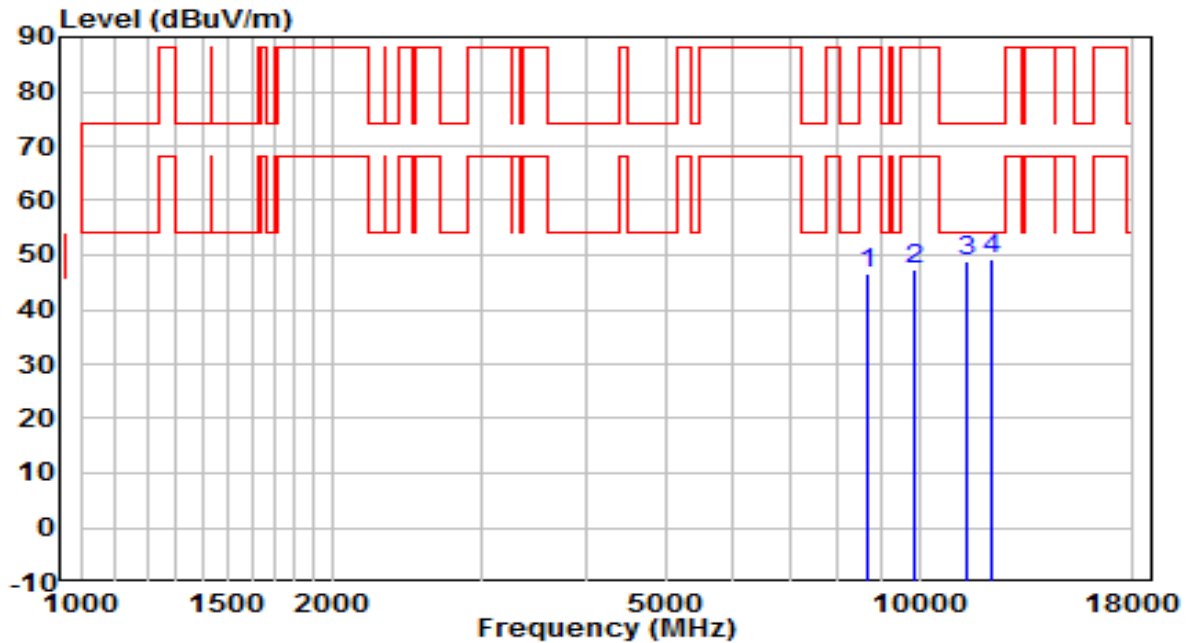


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8675.500	35.83	10.83	46.66	-41.54	88.20	Peak
2	9899.500	34.48	12.85	47.33	-40.87	88.20	Peak
3	11438.000	35.32	13.52	48.84	-25.16	74.00	Peak
4	* 12194.500	36.15	13.07	49.23	-24.77	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

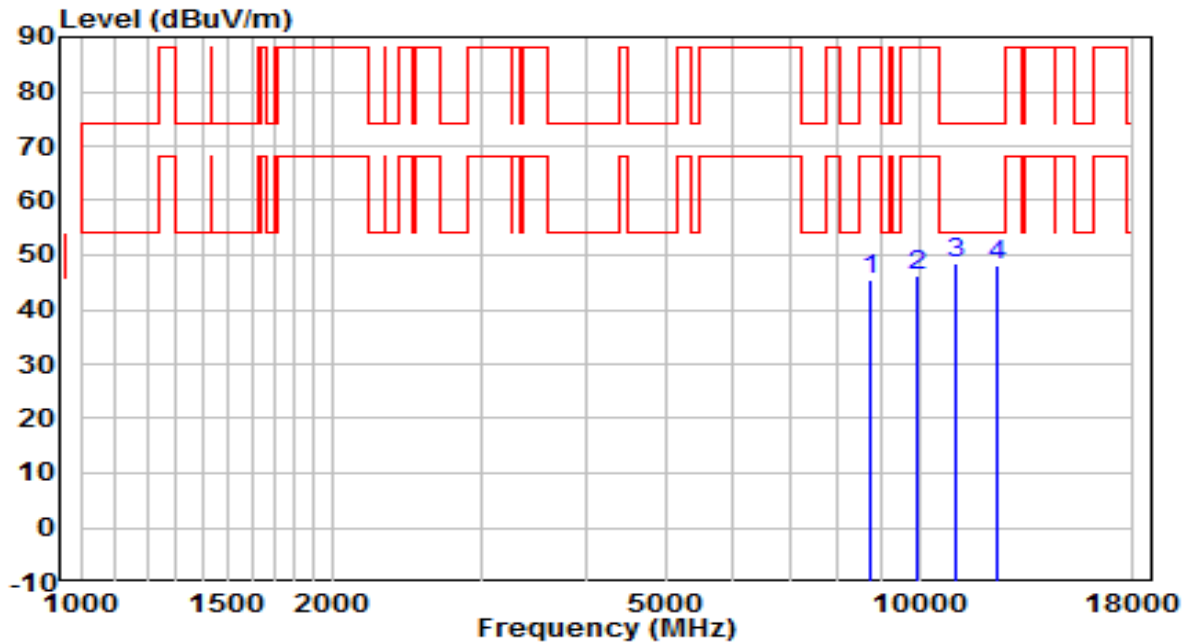


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8752.000	34.54	11.02	45.56	-42.64	88.20	Peak
2	9916.500	33.05	13.00	46.05	-42.15	88.20	Peak
3	* 11081.000	34.90	13.71	48.61	-25.39	74.00	Peak
4	12398.500	35.46	12.68	48.14	-25.86	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6205MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

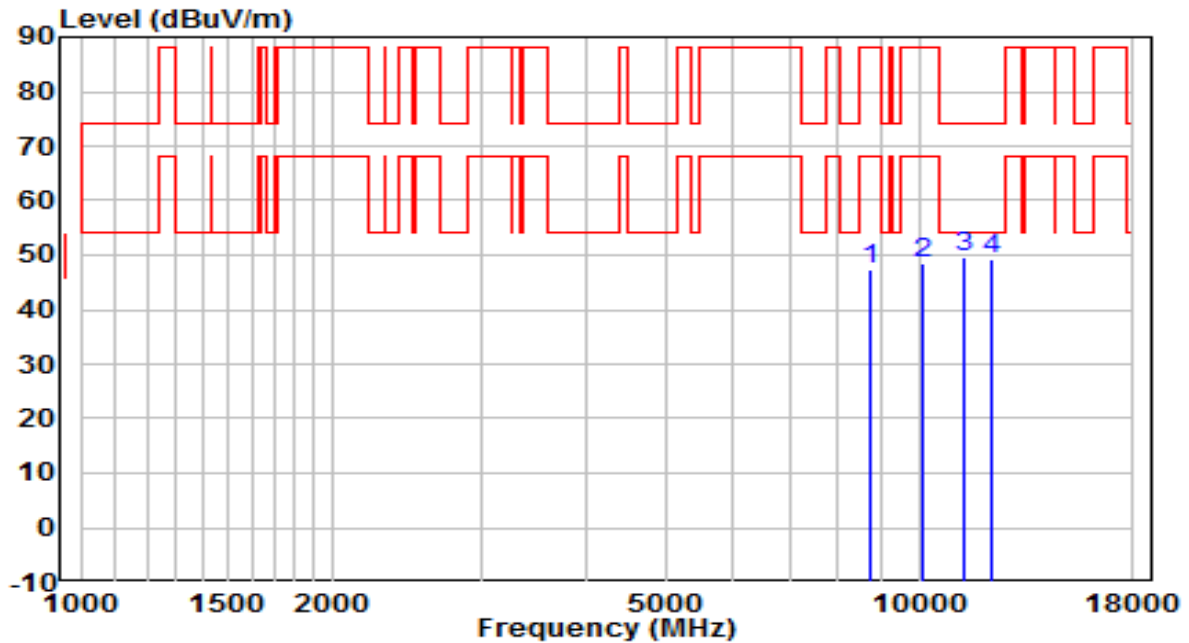


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8752.000	36.38	11.02	47.40	-40.80	88.20	Peak
2	10069.500	35.34	13.19	48.53	-39.67	88.20	Peak
3	* 11353.000	36.26	13.37	49.64	-24.36	74.00	Peak
4	12169.000	36.42	12.85	49.27	-24.73	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6205MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

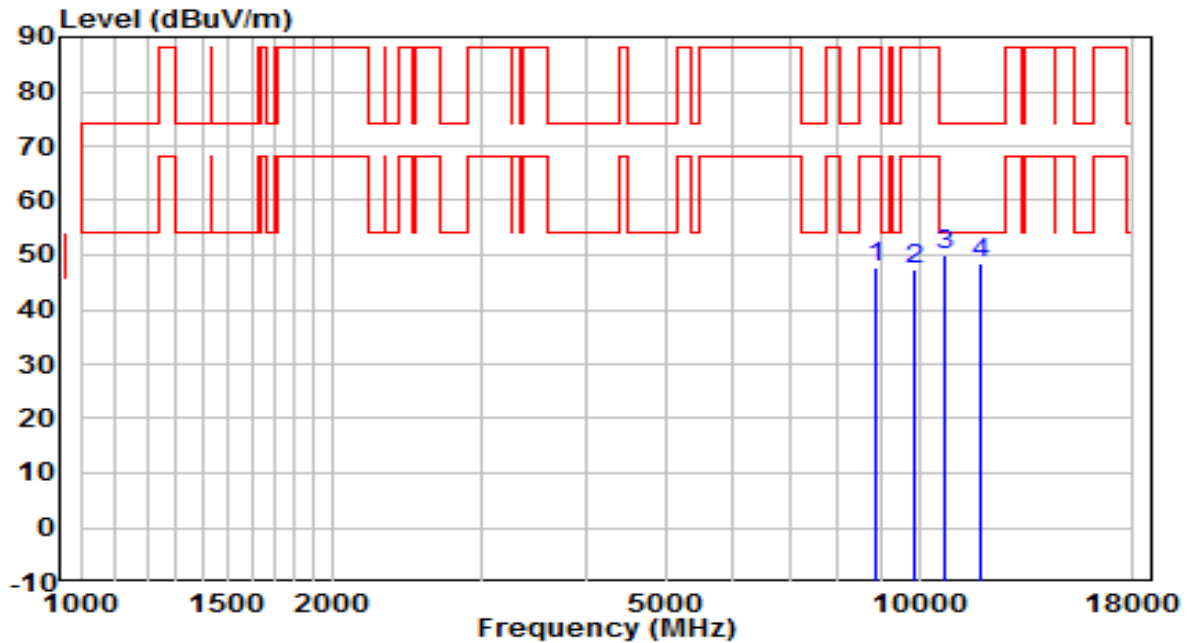


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8854.000	36.32	11.28	47.59	-40.61	88.20	Peak
2	9865.500	34.70	12.77	47.47	-40.73	88.20	Peak
3	* 10698.500	36.38	13.63	50.01	-23.99	74.00	Peak
4	11863.000	35.78	12.58	48.35	-25.65	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6405MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

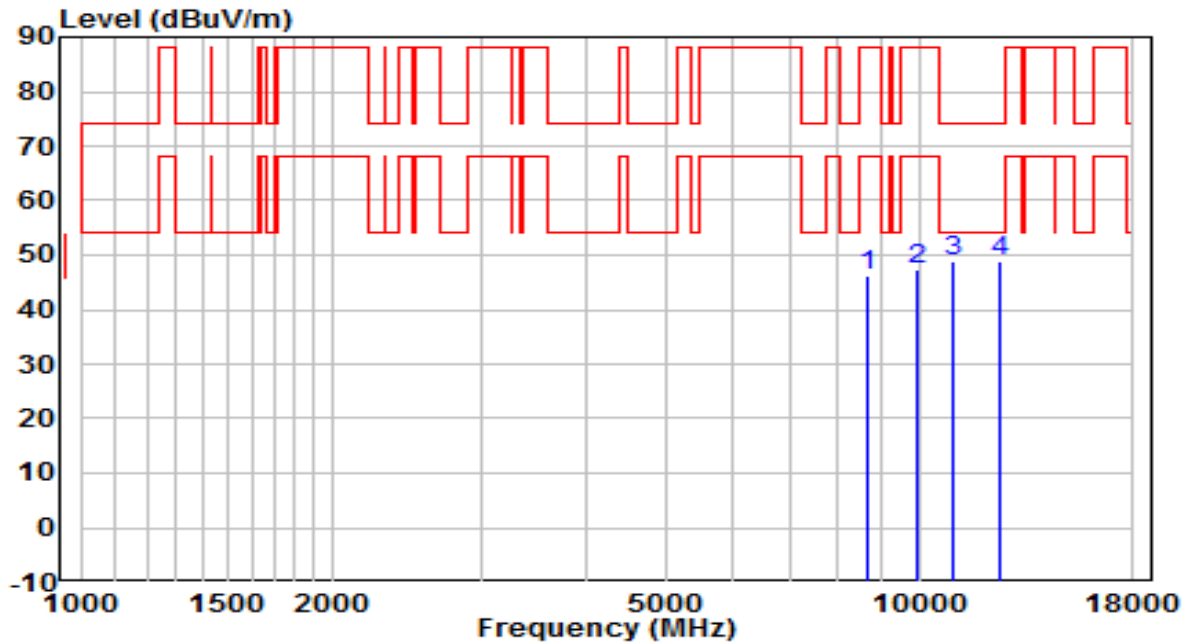


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8675.500	35.58	10.83	46.41	-41.79	88.20	Peak
2	9967.500	34.64	12.86	47.50	-40.70	88.20	Peak
3	* 10996.000	35.24	13.78	49.02	-24.98	74.00	Peak
4	12509.000	35.79	12.91	48.70	-25.30	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6405MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

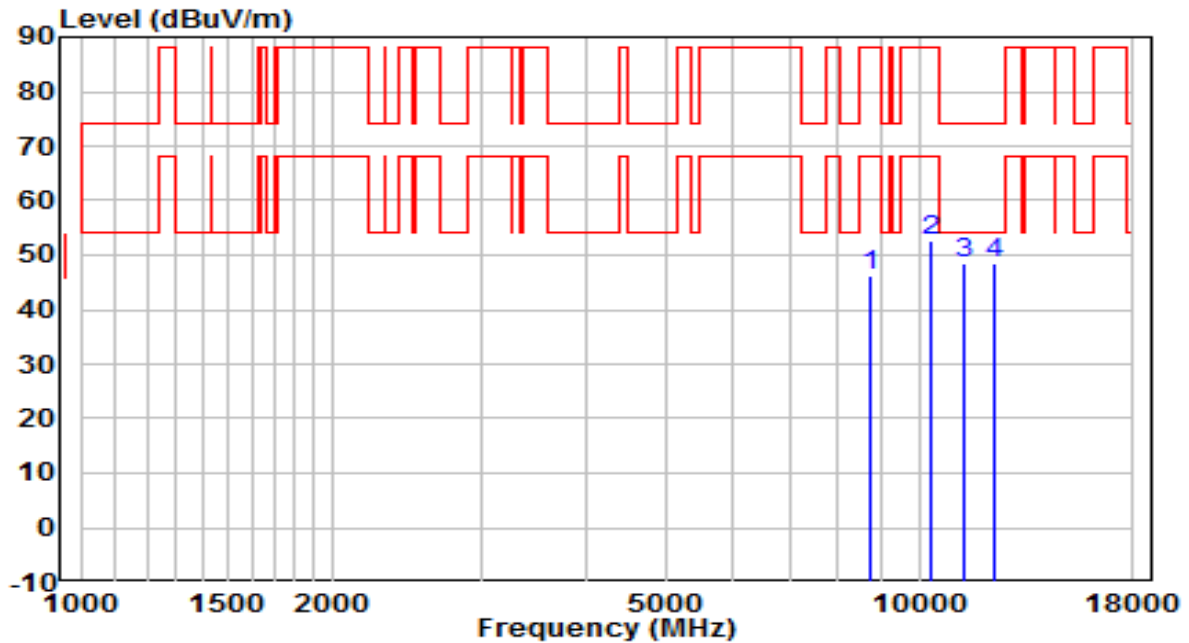


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8743.500	35.36	10.95	46.31	-41.89	88.20	Peak
2	10358.500	38.98	13.56	52.55	-35.65	88.20	Peak
3	11310.500	34.99	13.37	48.36	-25.64	74.00	Peak
4	* 12313.500	35.66	12.82	48.48	-25.52	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6445MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

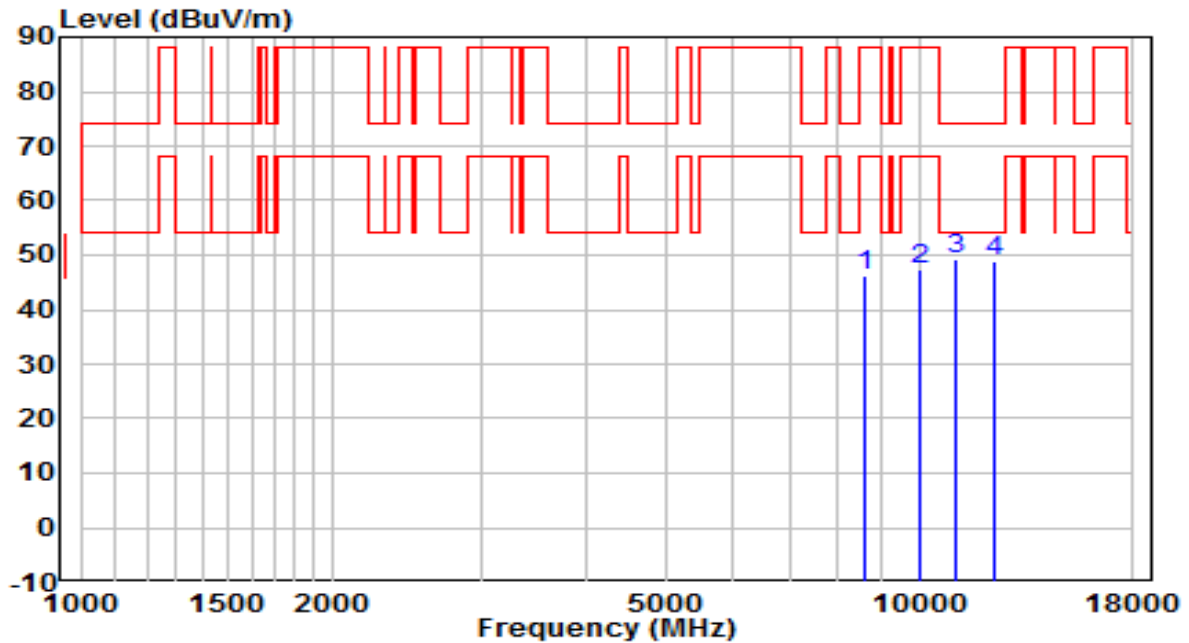


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8641.500	35.63	10.66	46.29	-41.91	88.20	Peak
2	10010.000	34.61	12.93	47.54	-40.66	88.20	Peak
3	* 11072.500	35.48	13.70	49.18	-24.82	74.00	Peak
4	12271.000	36.10	12.74	48.84	-25.16	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6445MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

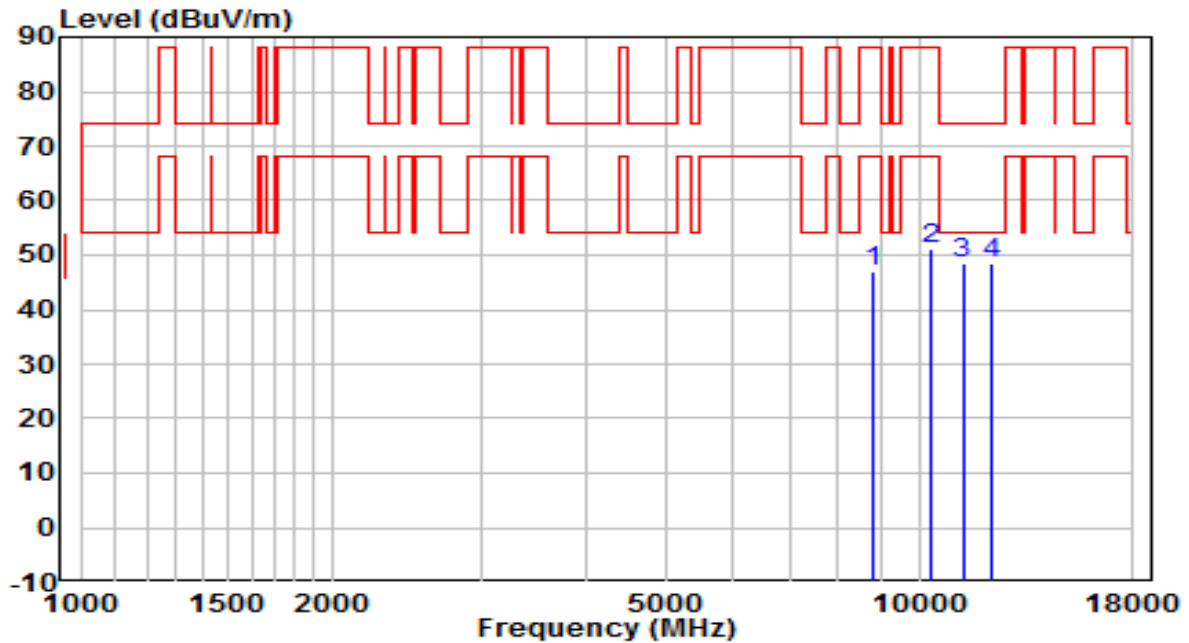


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8811.500	35.84	11.20	47.04	-41.16	88.20	Peak
2	10358.500	37.54	13.56	51.10	-37.10	88.20	Peak
3	* 11268.000	35.23	13.28	48.50	-25.50	74.00	Peak
4	12186.000	35.38	12.97	48.35	-25.65	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6485MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

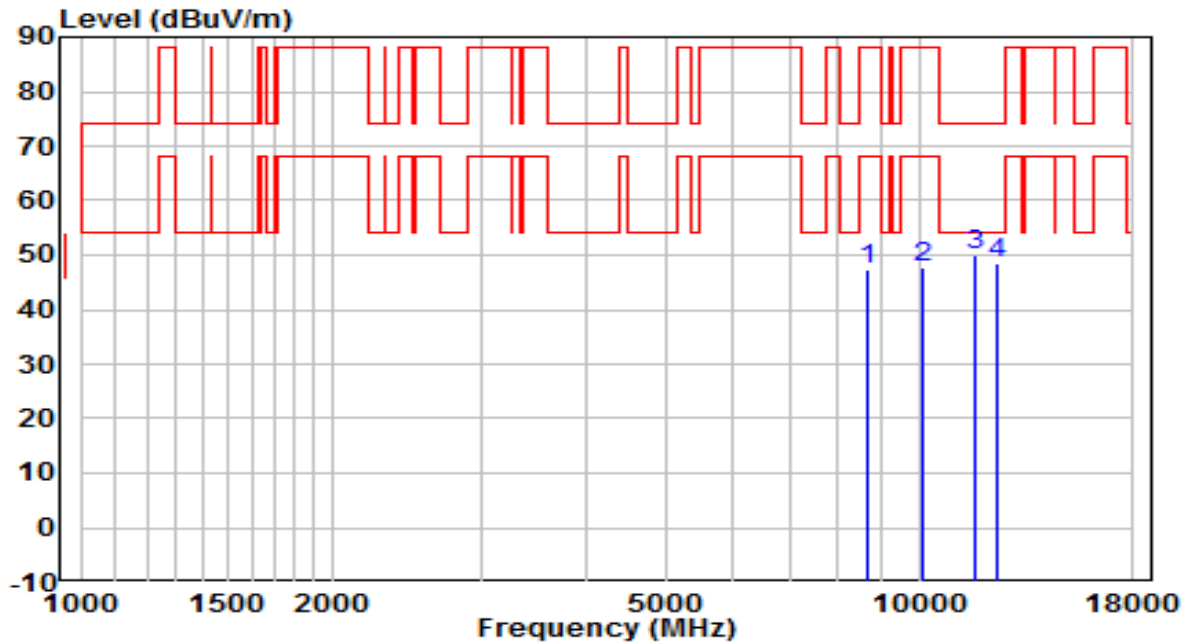


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8709.500	36.18	11.02	47.20	-41.00	88.20	Peak
2	10095.000	34.92	12.98	47.90	-40.30	88.20	Peak
3	* 11642.000	37.25	12.92	50.17	-23.83	74.00	Peak
4	12390.000	36.01	12.66	48.67	-25.34	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6485MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

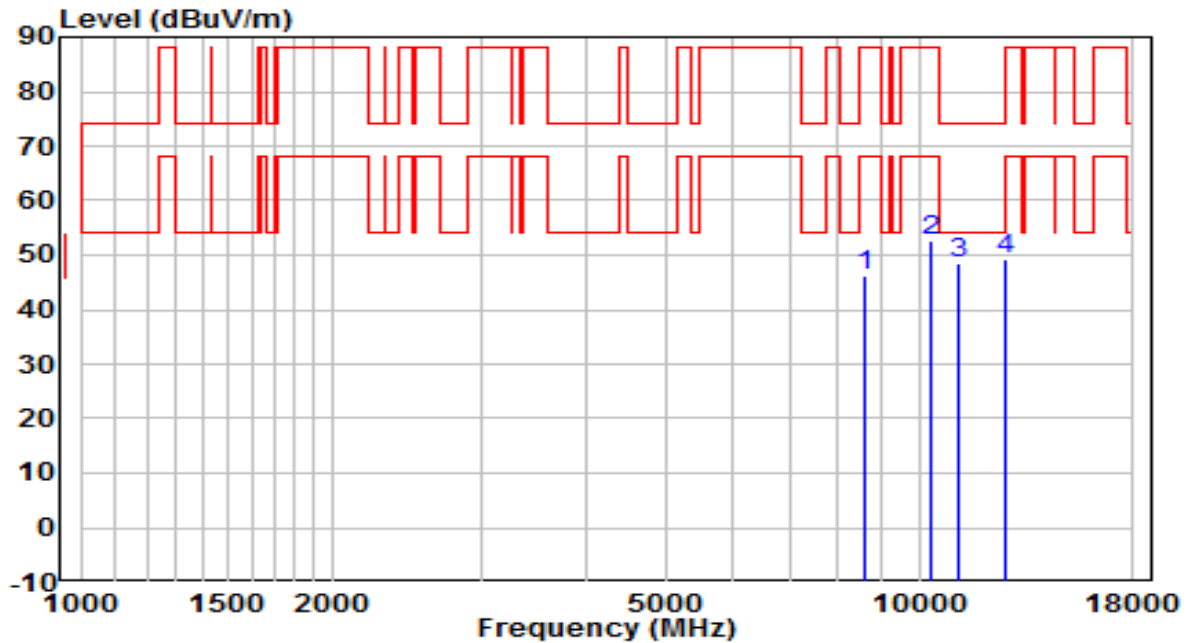


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8633.000	35.75	10.66	46.40	-41.80	88.20	Peak
2	10358.500	38.92	13.56	52.48	-35.72	88.20	Peak
3	11157.500	34.98	13.38	48.36	-25.64	74.00	Peak
4	* 12653.500	35.93	13.30	49.23	-24.77	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6525MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

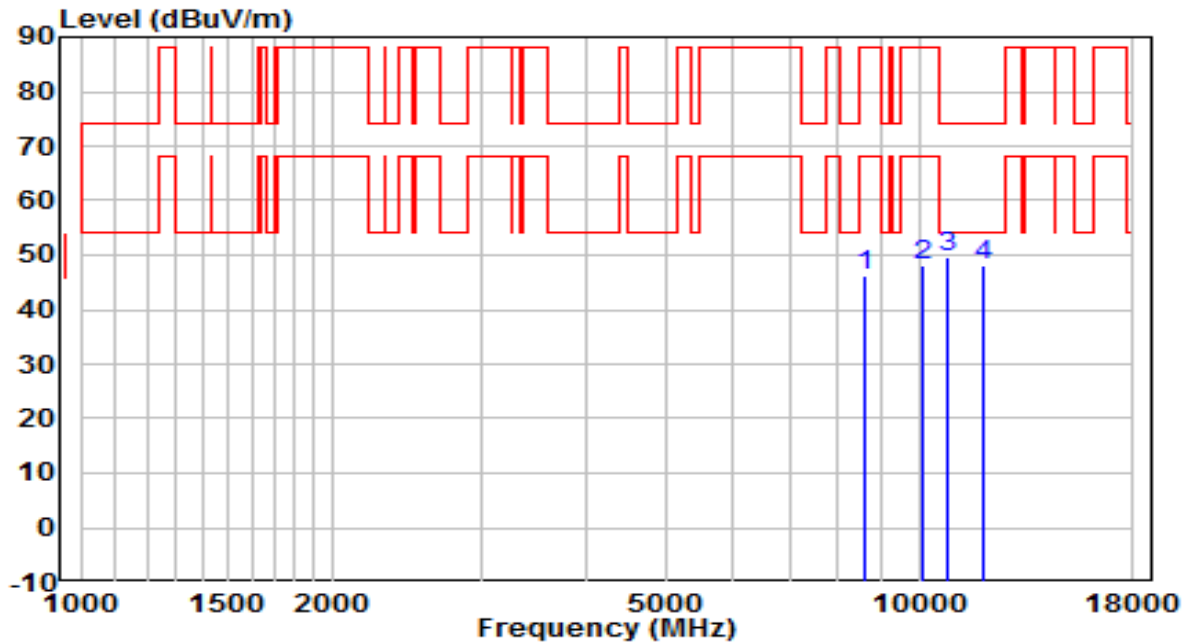


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8616.000	35.46	10.65	46.11	-42.09	88.20	Peak
2	10129.000	34.66	13.30	47.96	-40.24	88.20	Peak
3	* 10817.500	35.72	13.93	49.65	-24.35	74.00	Peak
4	11939.500	35.47	12.63	48.10	-25.90	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6525MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

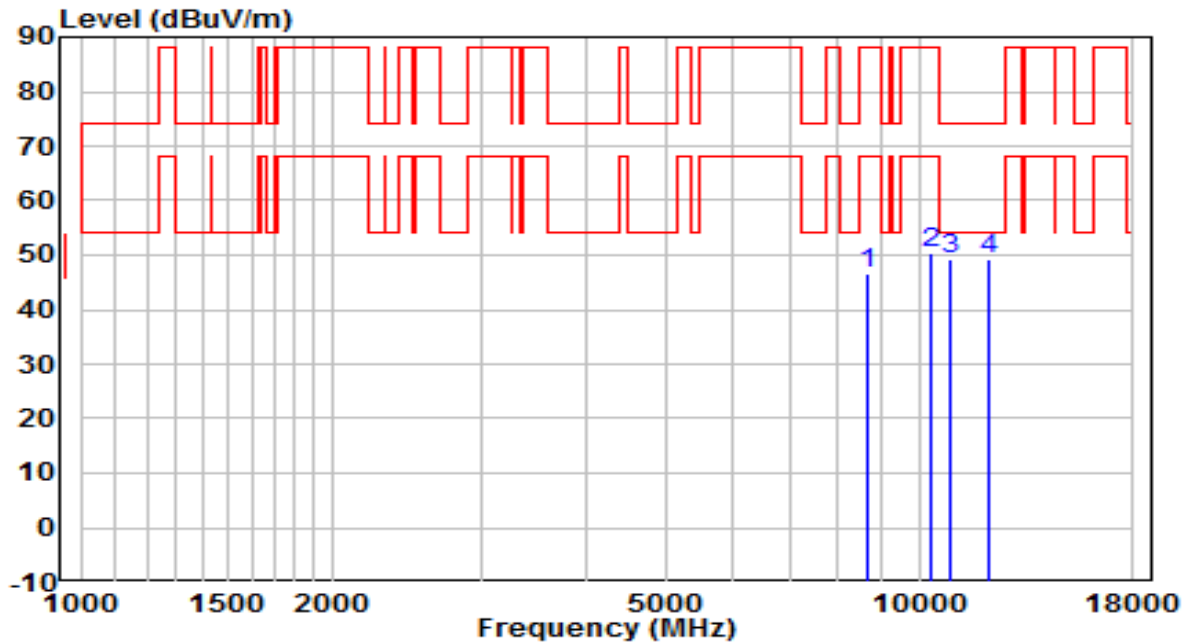


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8675.500	35.83	10.83	46.66	-41.54	88.20	Peak
2	10358.500	36.94	13.56	50.51	-37.69	88.20	Peak
3	* 10928.000	35.36	13.88	49.25	-24.75	74.00	Peak
4	12143.500	36.13	12.94	49.07	-24.93	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6565MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

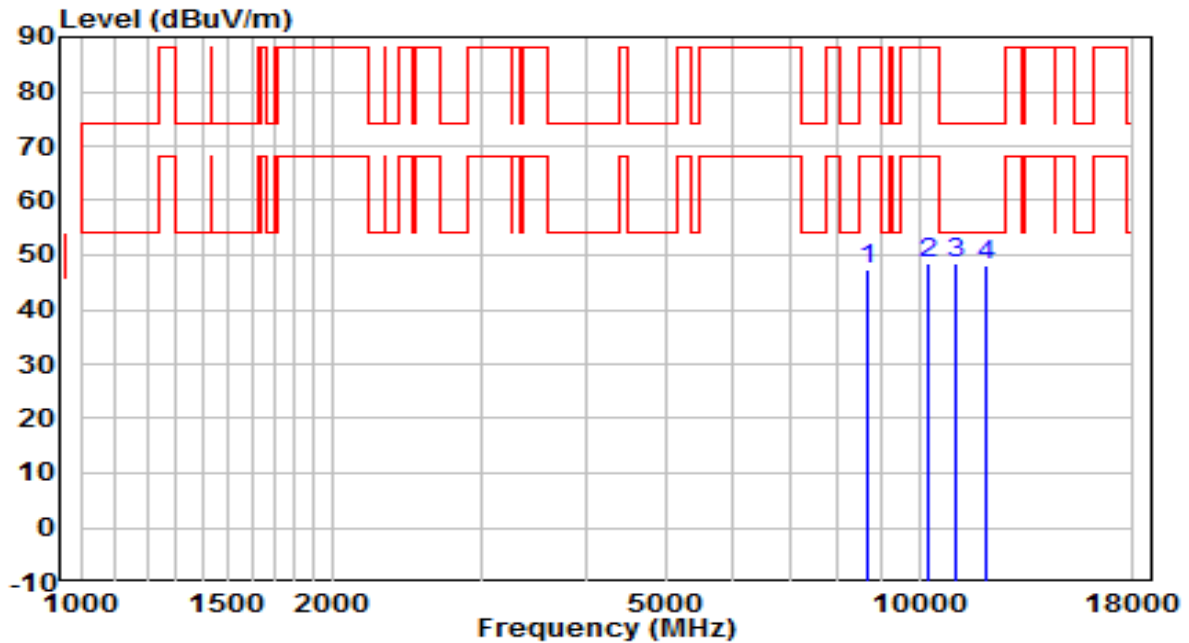


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8684.000	36.34	10.86	47.20	-41.00	88.20	Peak
2	10248.000	34.90	13.48	48.38	-39.82	88.20	Peak
3	* 11030.000	34.88	13.75	48.63	-25.37	74.00	Peak
4	12058.500	35.40	12.78	48.18	-25.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6565MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

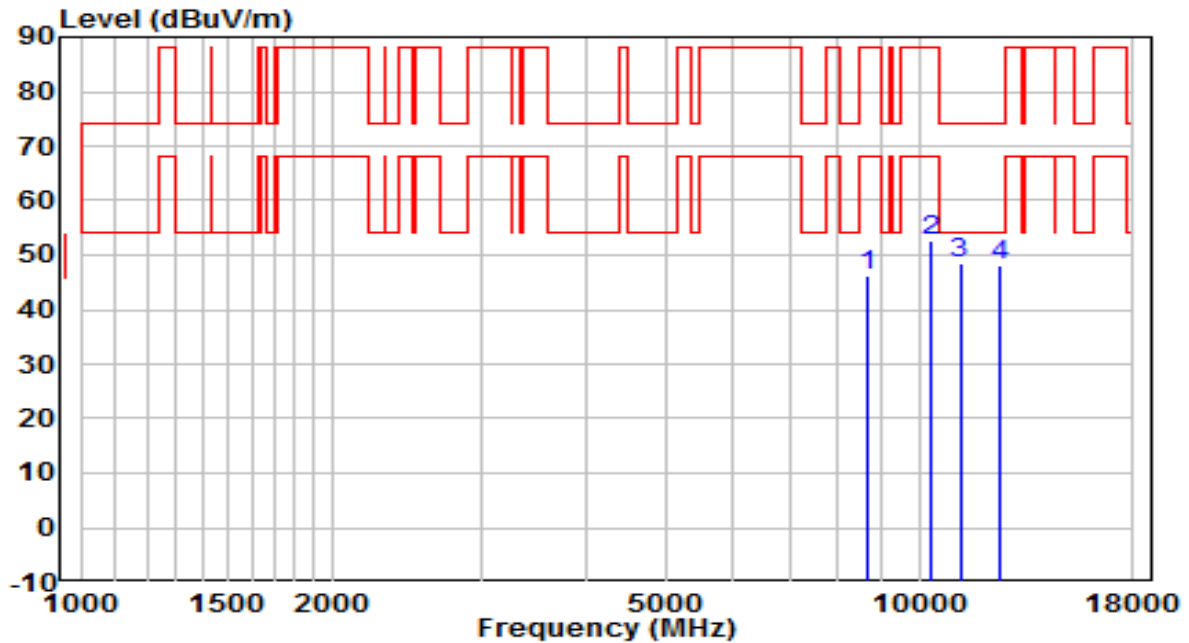


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8667.000	35.59	10.77	46.36	-41.84	88.20	Peak
2	10358.500	39.08	13.56	52.64	-35.56	88.20	Peak
3	* 11183.000	35.22	13.44	48.67	-25.33	74.00	Peak
4	12492.000	35.46	12.75	48.20	-25.80	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6685MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

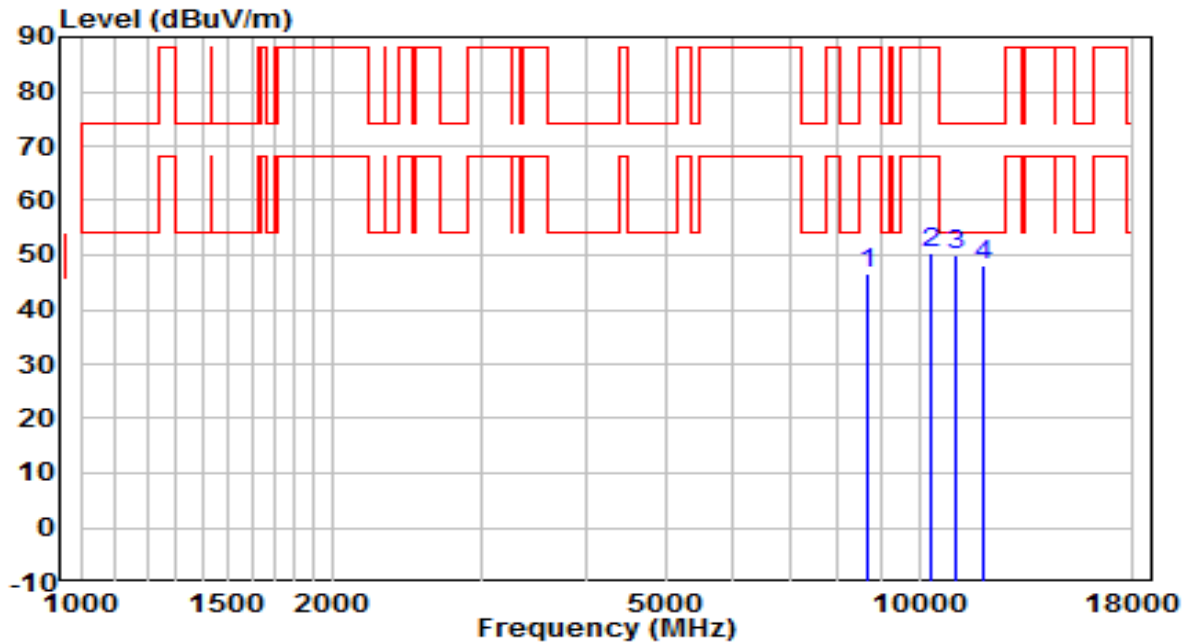


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8709.500	35.68	11.02	46.69	-41.51	88.20	Peak
2	10358.500	36.80	13.56	50.36	-37.84	88.20	Peak
3	* 11089.500	36.35	13.62	49.96	-24.04	74.00	Peak
4	11948.000	35.32	12.70	48.02	-25.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6685MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

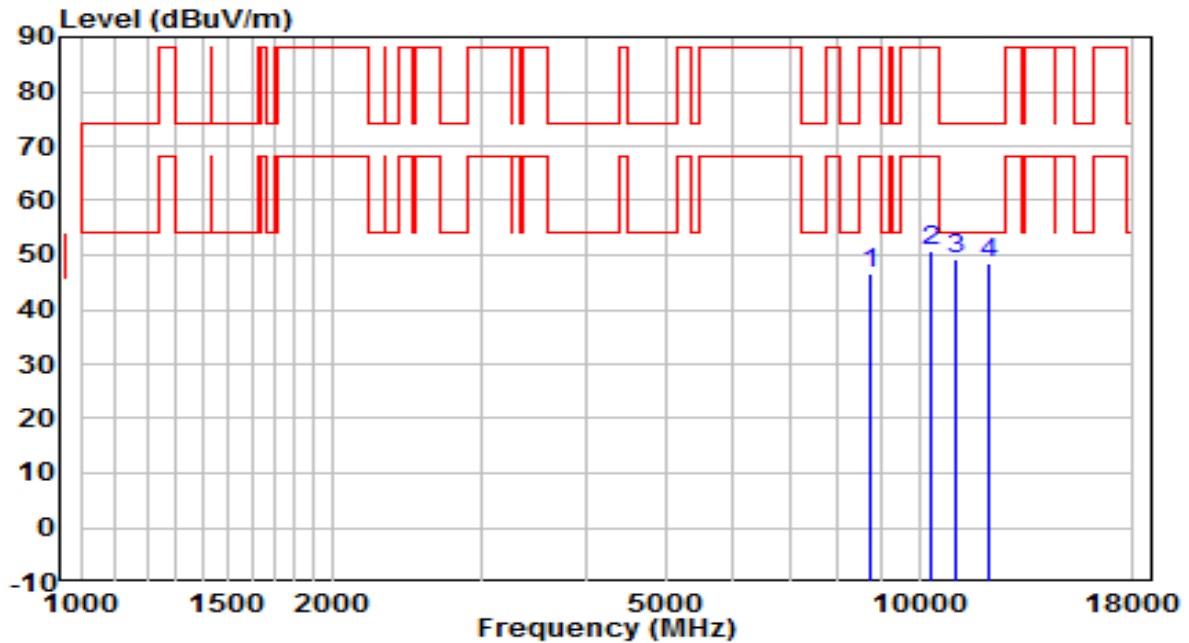


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8743.500	35.58	10.95	46.53	-41.67	88.20	Peak
2	10358.500	37.00	13.56	50.57	-37.63	88.20	Peak
3	* 11047.000	35.40	13.75	49.15	-24.85	74.00	Peak
4	12143.500	35.51	12.94	48.45	-25.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6845MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

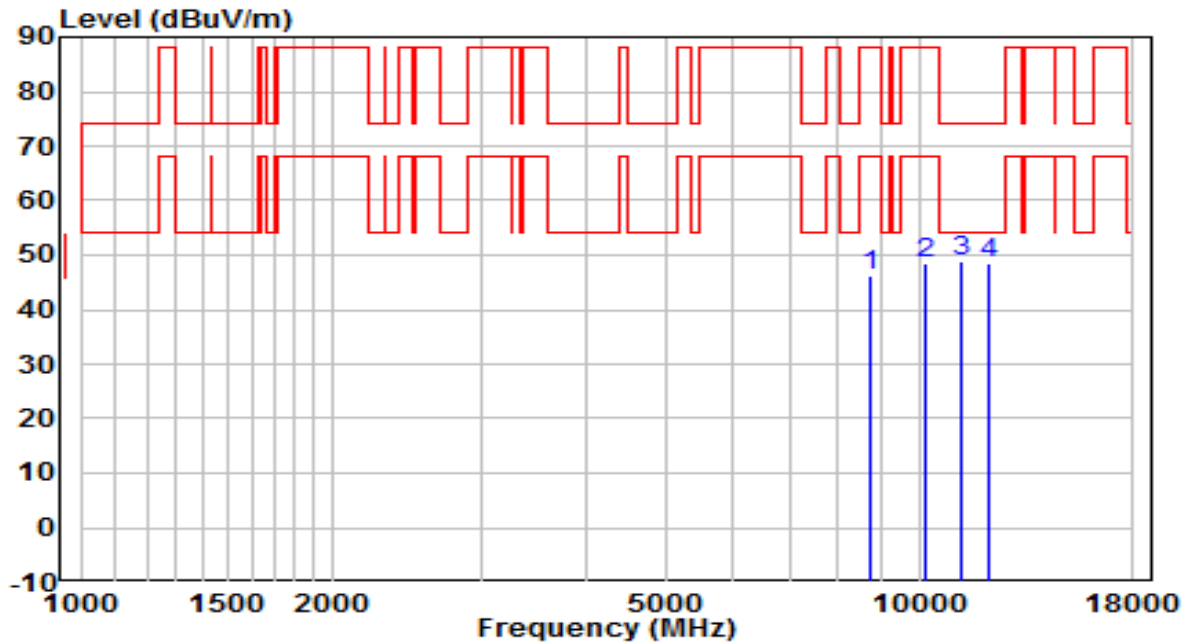


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8735.000	35.28	10.93	46.21	-41.99	88.20	Peak
2	10163.000	34.97	13.38	48.35	-39.85	88.20	Peak
3	* 11191.500	35.44	13.46	48.90	-25.10	74.00	Peak
4	12075.500	35.63	12.89	48.52	-25.48	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6845MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

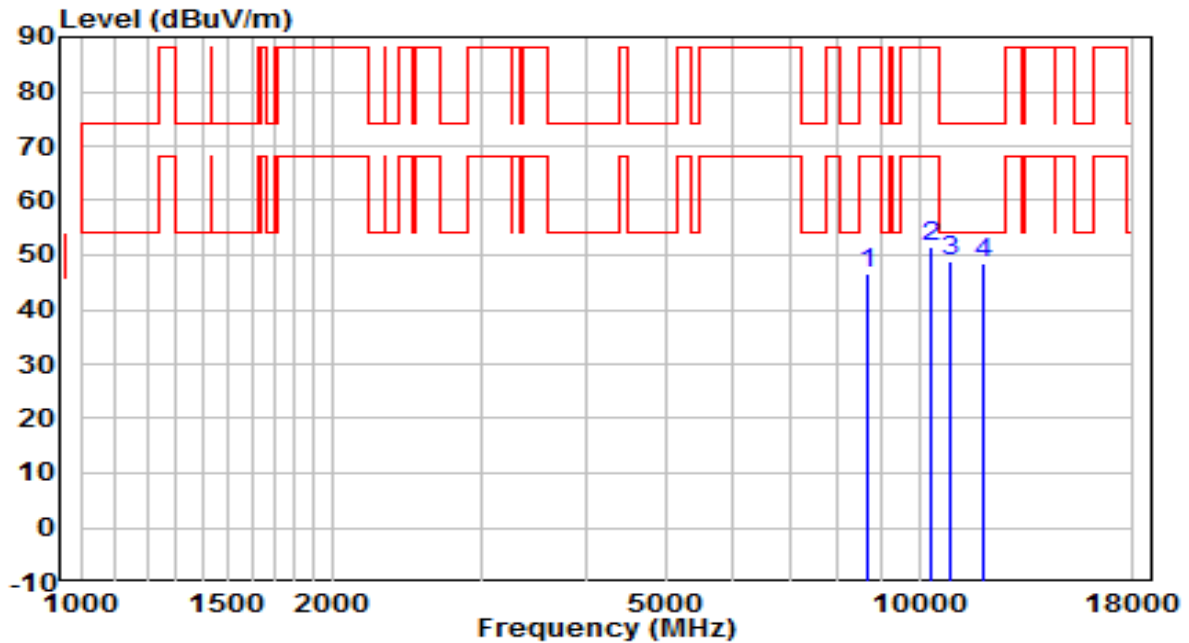


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8658.500	35.88	10.76	46.64	-41.56	88.20	Peak
2	10358.500	38.04	13.56	51.61	-36.59	88.20	Peak
3	* 10928.000	34.87	13.88	48.75	-25.25	74.00	Peak
4	11888.500	35.74	12.57	48.31	-25.69	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6885MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

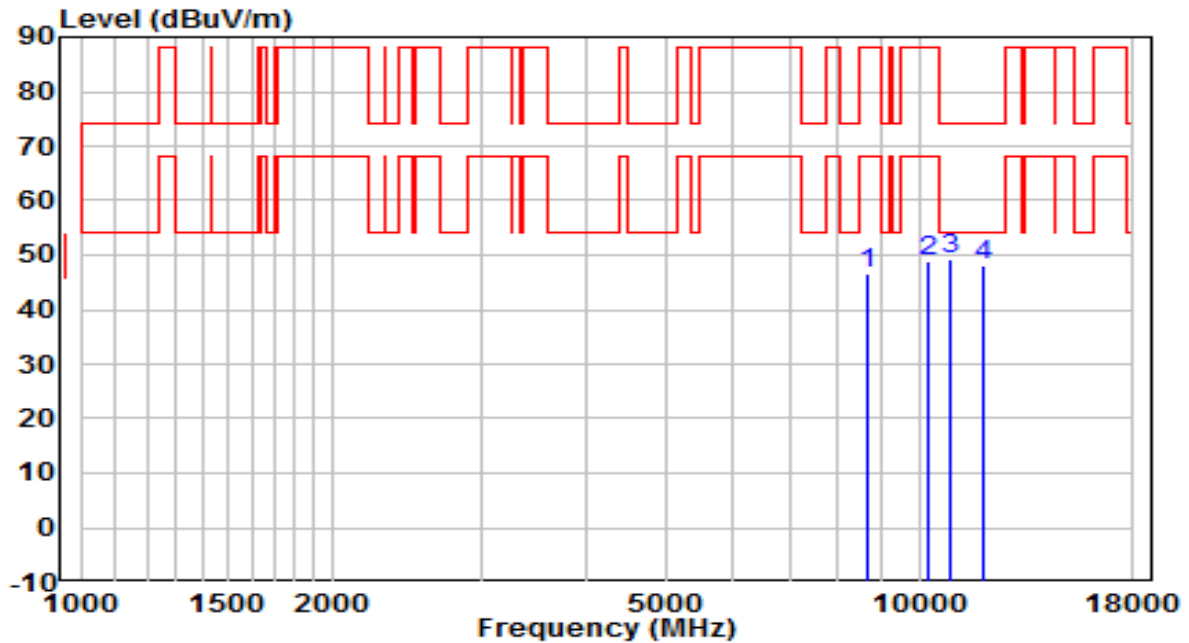


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8675.500	35.70	10.83	46.53	-41.67	88.20	Peak
2	10248.000	35.53	13.48	49.00	-39.20	88.20	Peak
3	* 10885.500	35.30	13.90	49.19	-24.81	74.00	Peak
4	11948.000	35.28	12.70	47.99	-26.01	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6885MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

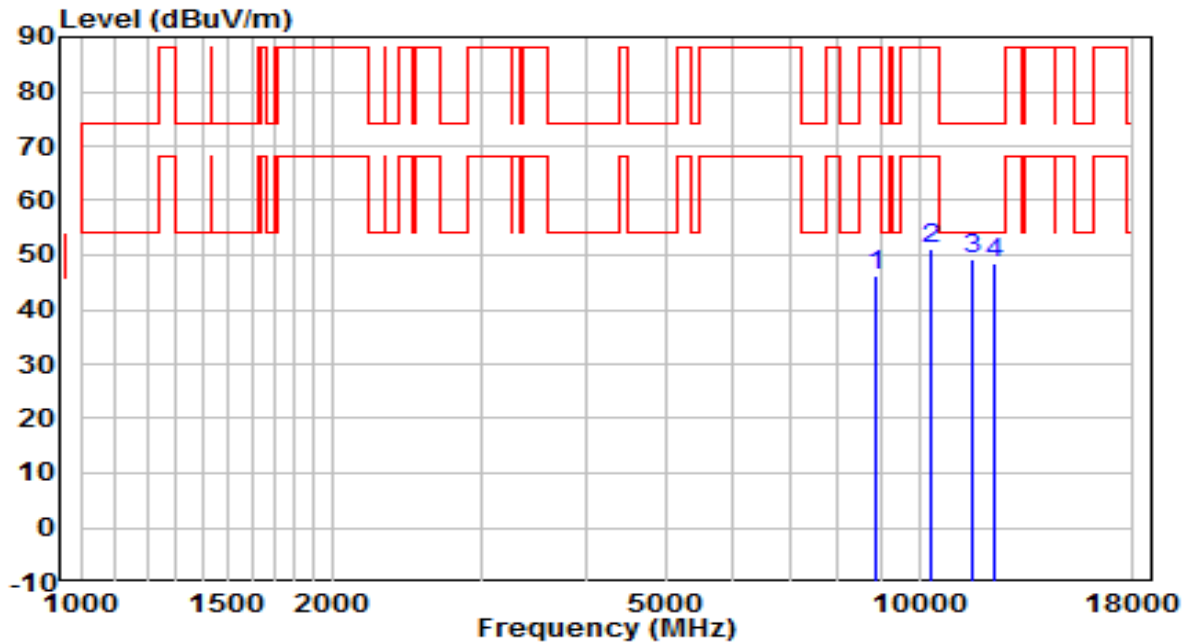


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8854.000	34.91	11.28	46.19	-42.01	88.20	Peak
2	10358.500	37.40	13.56	50.97	-37.23	88.20	Peak
3	* 11540.000	36.10	13.12	49.22	-24.78	74.00	Peak
4	12288.000	35.44	12.89	48.33	-25.67	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6925MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

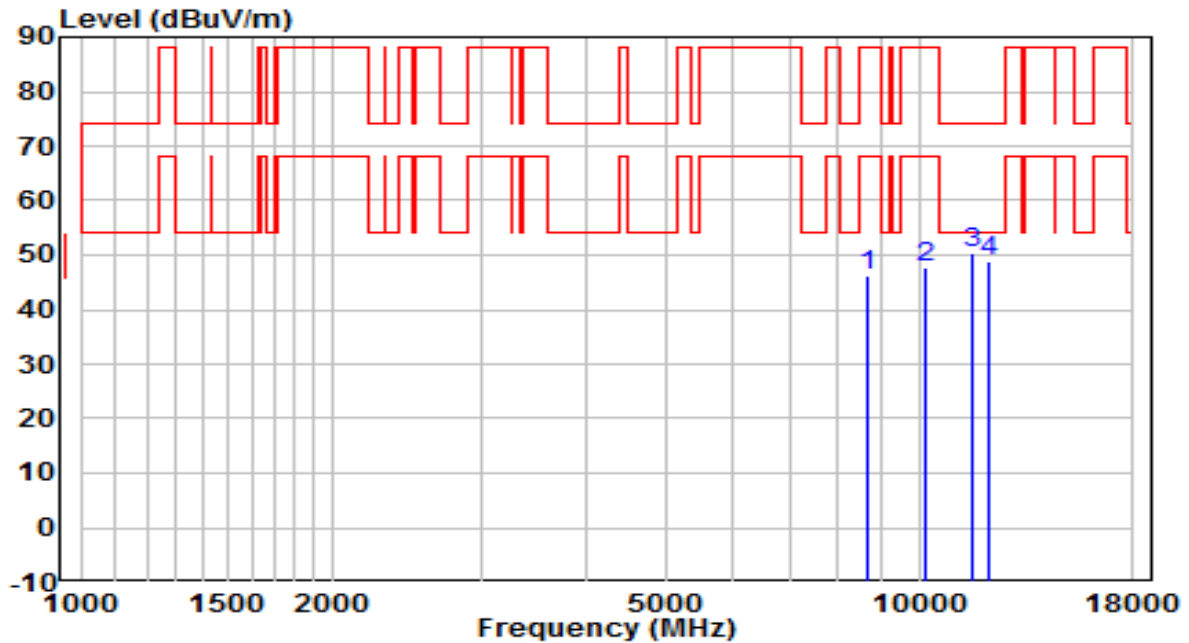


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8658.500	35.55	10.76	46.30	-41.90	88.20	Peak
2	10171.500	34.49	13.42	47.91	-40.29	88.20	Peak
3	* 11608.000	37.41	12.94	50.35	-23.65	74.00	Peak
4	12101.000	36.10	12.86	48.96	-25.04	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 6925MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

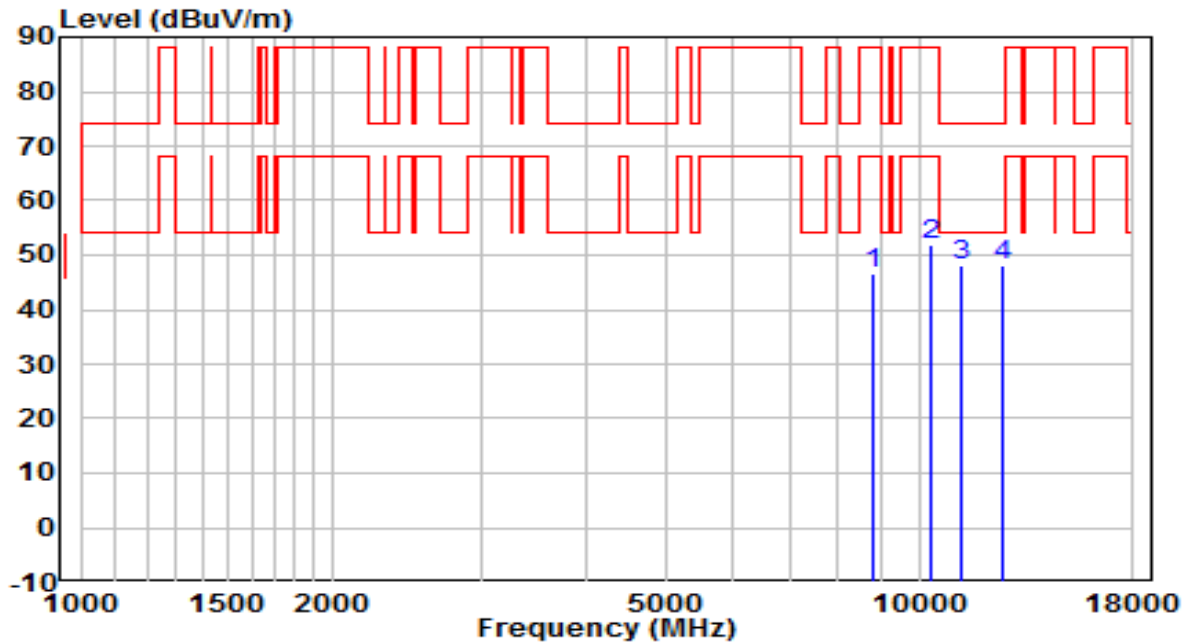


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8820.000	35.29	11.19	46.49	-41.71	88.20	Peak
2	10358.500	38.48	13.56	52.04	-36.16	88.20	Peak
3	11191.500	34.69	13.46	48.15	-25.85	74.00	Peak
4	* 12543.000	35.34	12.91	48.25	-25.75	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7005MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

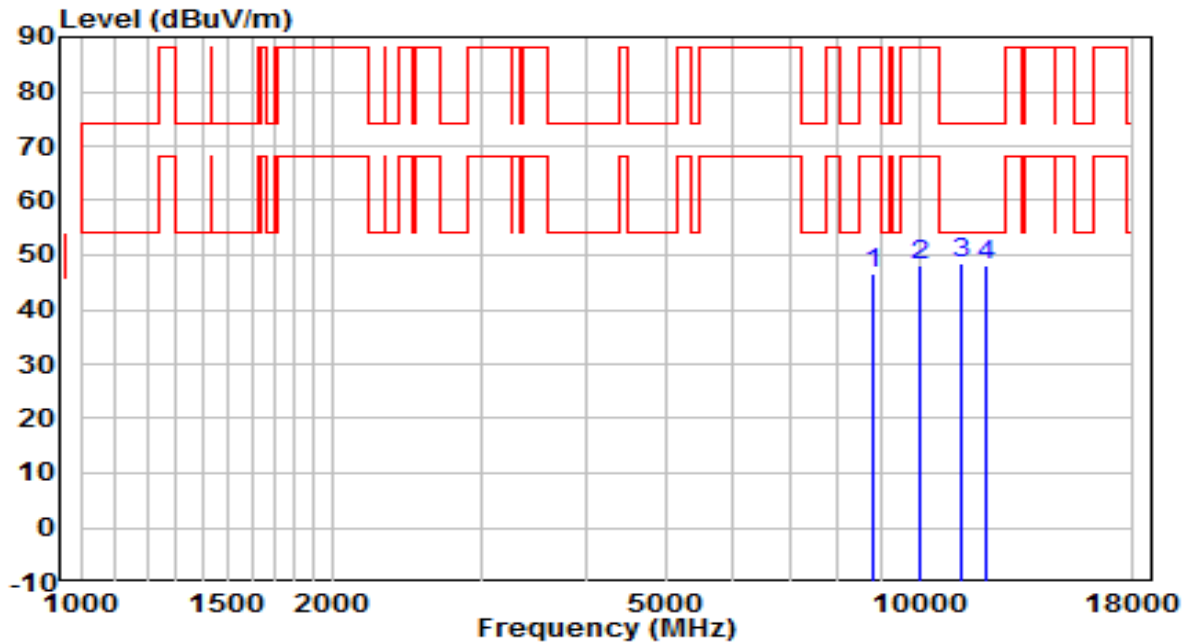


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8786.000	35.44	11.16	46.60	-41.60	88.20	Peak
2	10010.000	35.25	12.93	48.17	-40.03	88.20	Peak
3	* 11242.500	35.21	13.36	48.57	-25.43	74.00	Peak
4	11999.000	35.45	12.76	48.21	-25.79	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7005MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

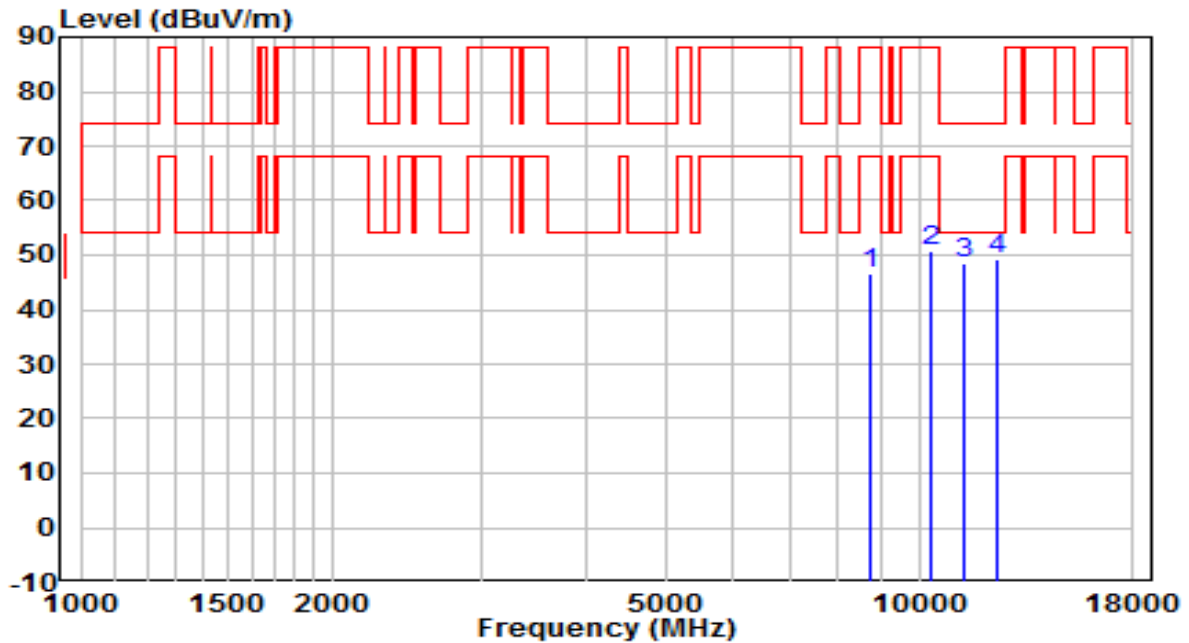


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8743.500	35.62	10.95	46.57	-41.63	88.20	Peak
2	10358.500	37.29	13.56	50.86	-37.34	88.20	Peak
3	11310.500	34.95	13.37	48.33	-25.67	74.00	Peak
4	* 12407.000	36.36	12.70	49.06	-24.94	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

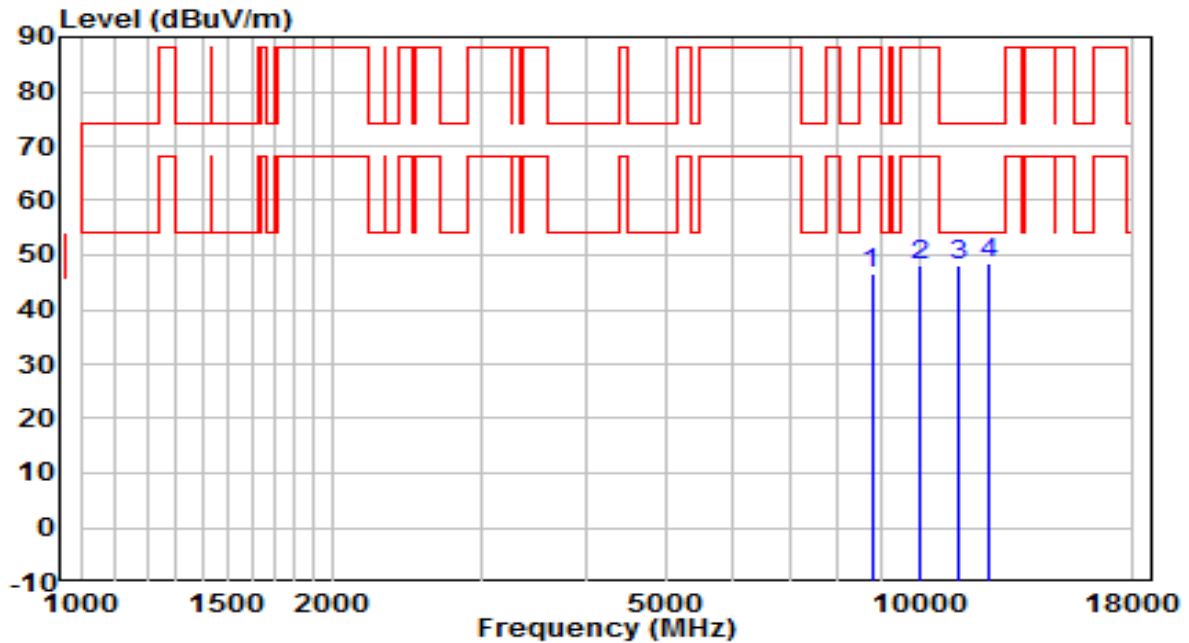


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8777.500	35.30	11.17	46.47	-41.73	88.20	Peak
2	10010.000	35.30	12.93	48.23	-39.97	88.20	Peak
3	11115.000	34.56	13.45	48.02	-25.98	74.00	Peak
4	* 12092.500	35.37	12.95	48.32	-25.68	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

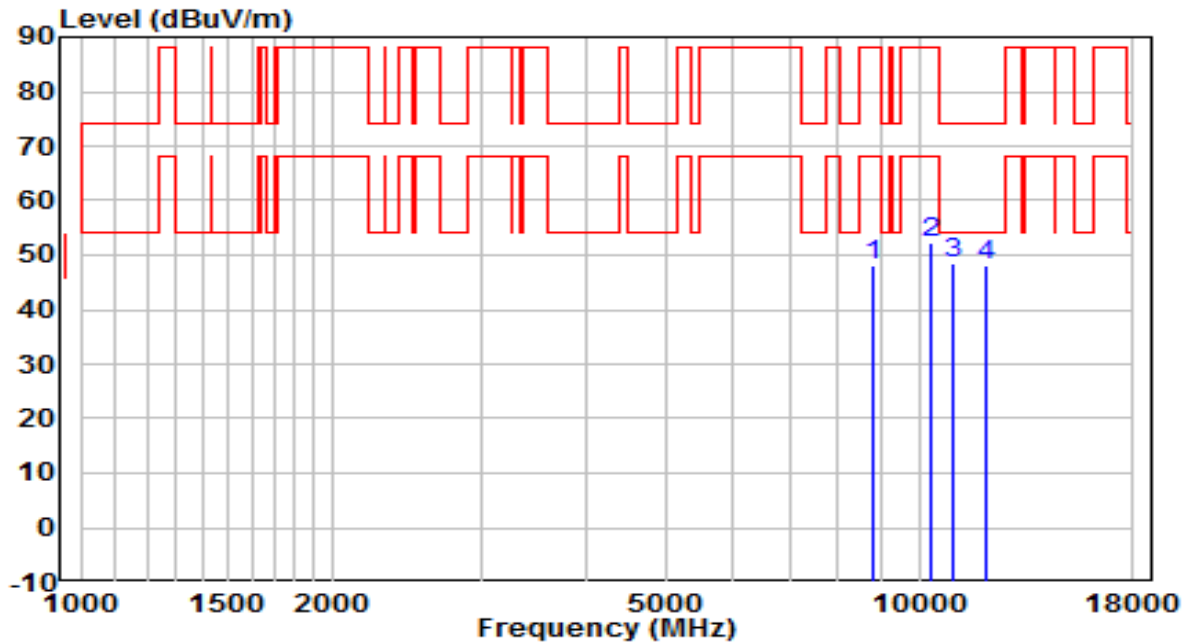


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8820.000	36.74	11.19	47.94	-40.26	88.20	Peak
2	10358.500	38.67	13.56	52.23	-35.97	88.20	Peak
3	* 10979.000	34.93	13.72	48.65	-25.35	74.00	Peak
4	12058.500	35.30	12.78	48.09	-25.91	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

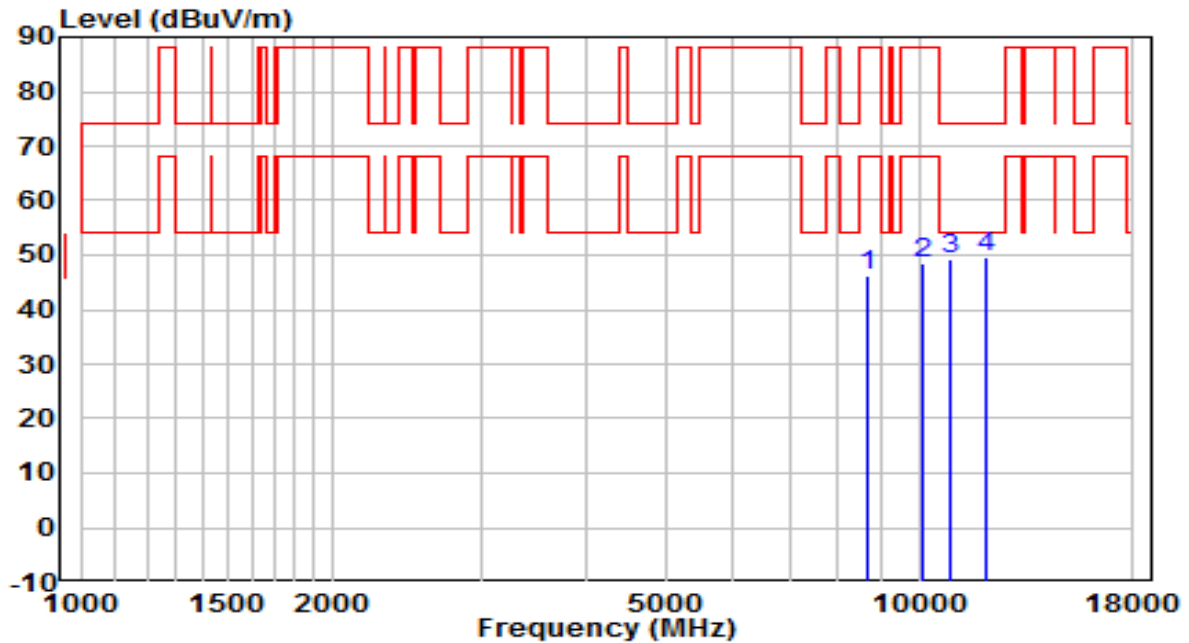


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8650.000	35.56	10.71	46.27	-41.93	88.20	Peak
2	10129.000	35.33	13.30	48.63	-39.57	88.20	Peak
3	10902.500	35.42	13.79	49.21	-24.79	74.00	Peak
4	* 11990.500	36.82	12.68	49.50	-24.50	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

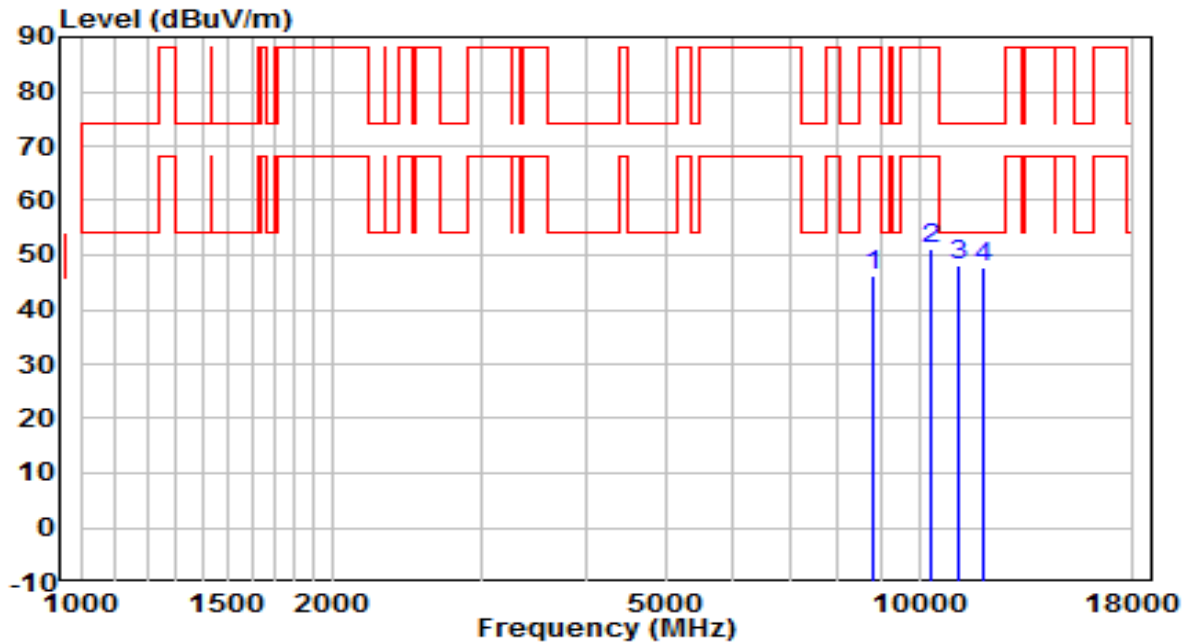


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8828.500	35.11	11.15	46.26	-41.94	88.20	Peak
2	10358.500	37.63	13.56	51.20	-37.00	88.20	Peak
3	* 11132.000	34.90	13.36	48.26	-25.74	74.00	Peak
4	11948.000	35.06	12.70	47.76	-26.24	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6225MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

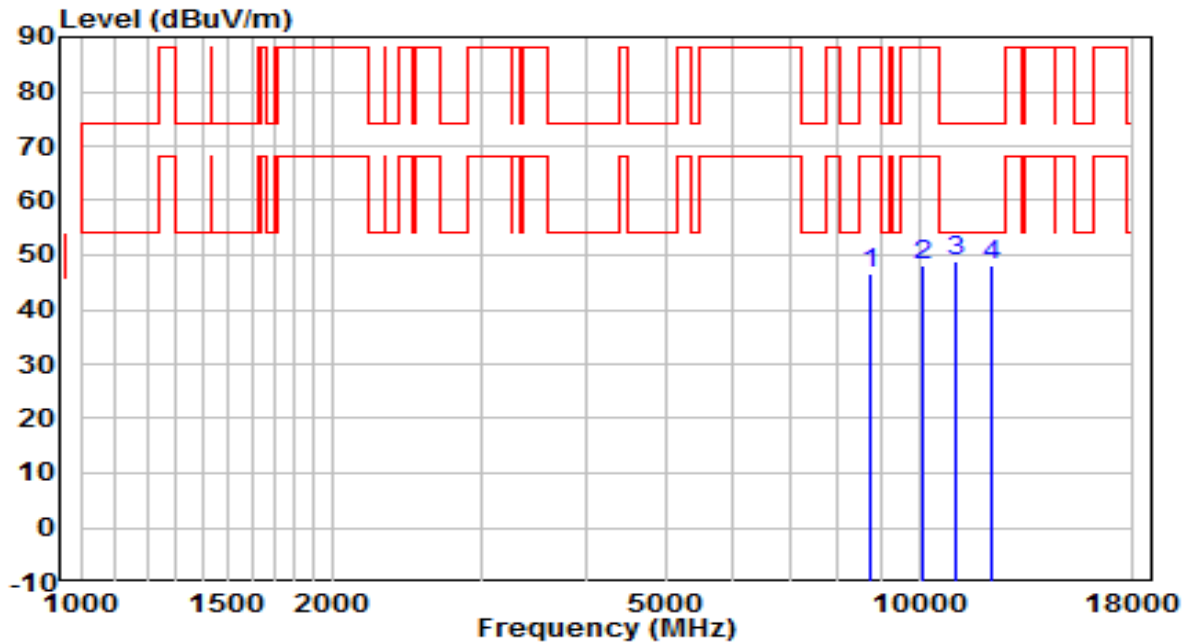


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8718.000	35.43	11.00	46.43	-41.77	88.20	Peak
2	10078.000	34.70	13.32	48.01	-40.19	88.20	Peak
3	* 11081.000	35.09	13.71	48.80	-25.20	74.00	Peak
4	12203.000	35.26	12.99	48.25	-25.75	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6225MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

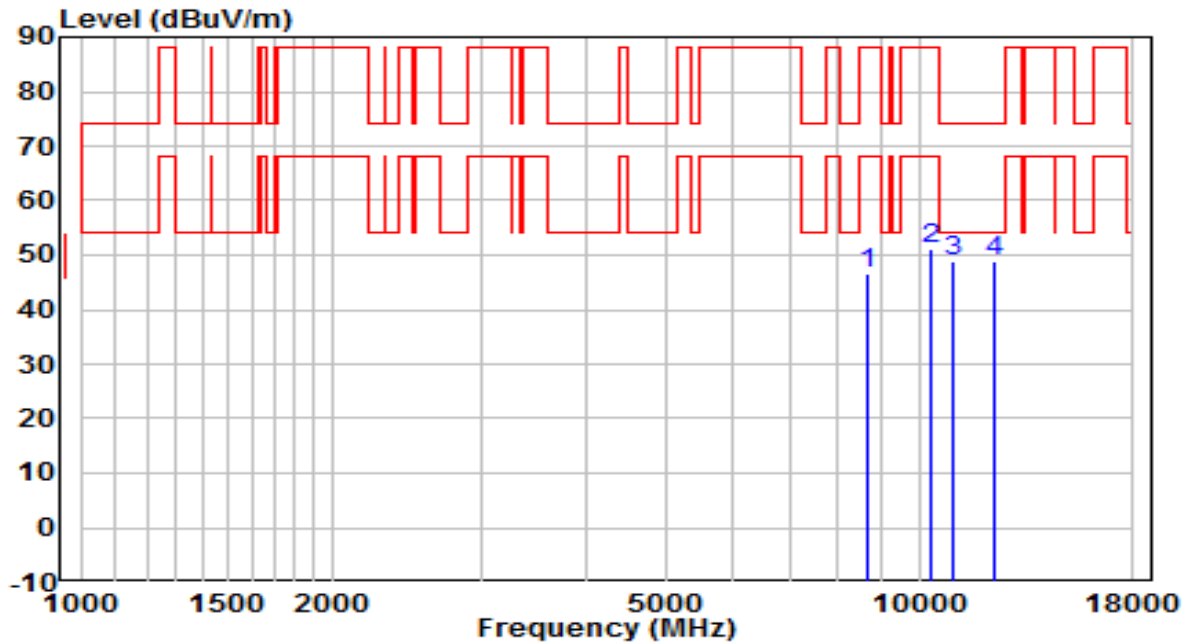


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8658.500	35.79	10.76	46.55	-41.65	88.20	Peak
2	10358.500	37.65	13.56	51.21	-36.99	88.20	Peak
3	* 10996.000	35.26	13.78	49.04	-24.96	74.00	Peak
4	12296.500	36.11	12.91	49.02	-24.98	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6385MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

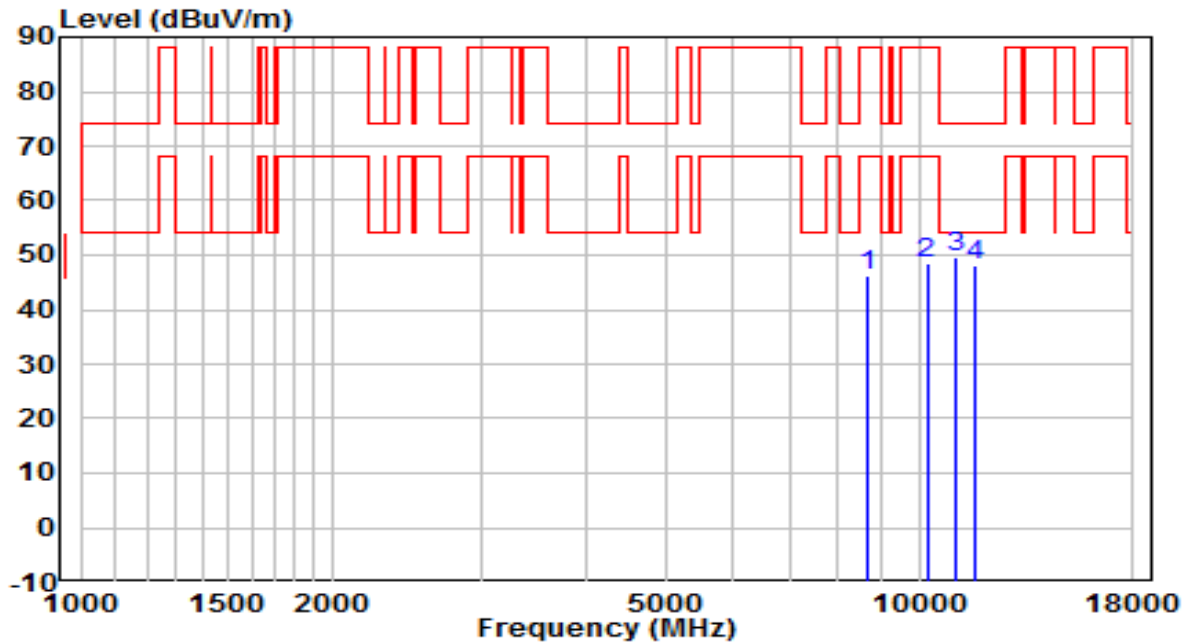


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8650.000	35.33	10.71	46.04	-42.16	88.20	Peak
2	10214.000	35.29	13.21	48.49	-39.71	88.20	Peak
3	* 11064.000	35.98	13.69	49.67	-24.33	74.00	Peak
4	11642.000	35.26	12.92	48.18	-25.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6385MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

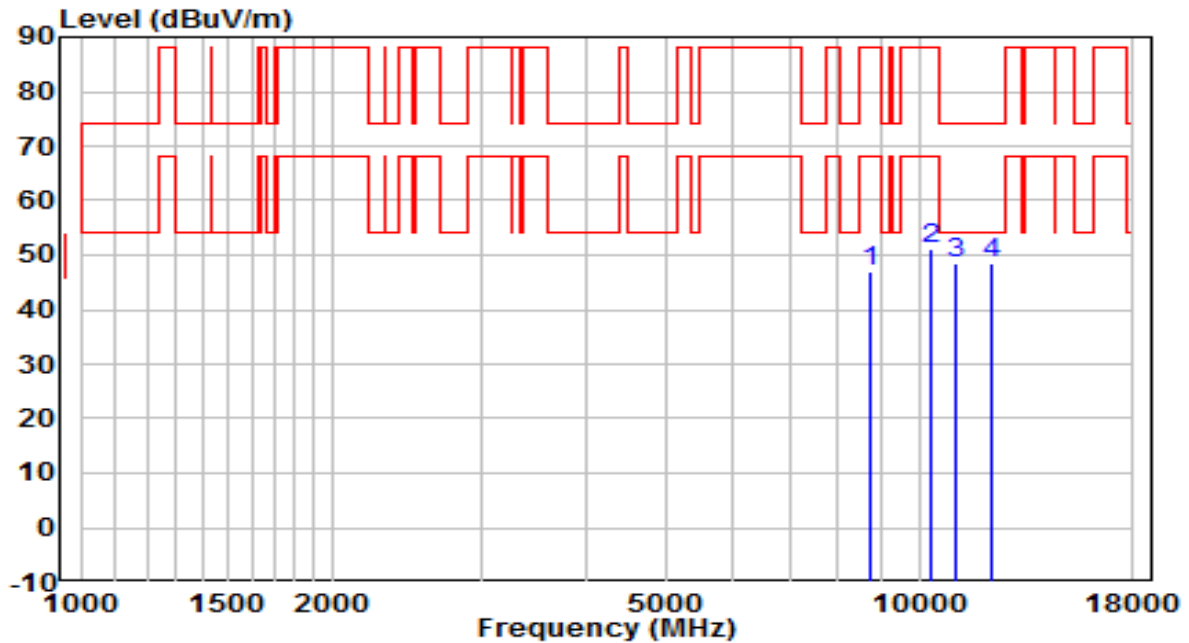


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8735.000	36.15	10.93	47.07	-41.13	88.20	Peak
2	10358.500	37.62	13.56	51.19	-37.01	88.20	Peak
3	* 11089.500	34.95	13.62	48.57	-25.43	74.00	Peak
4	12194.500	35.34	13.07	48.42	-25.58	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6465MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

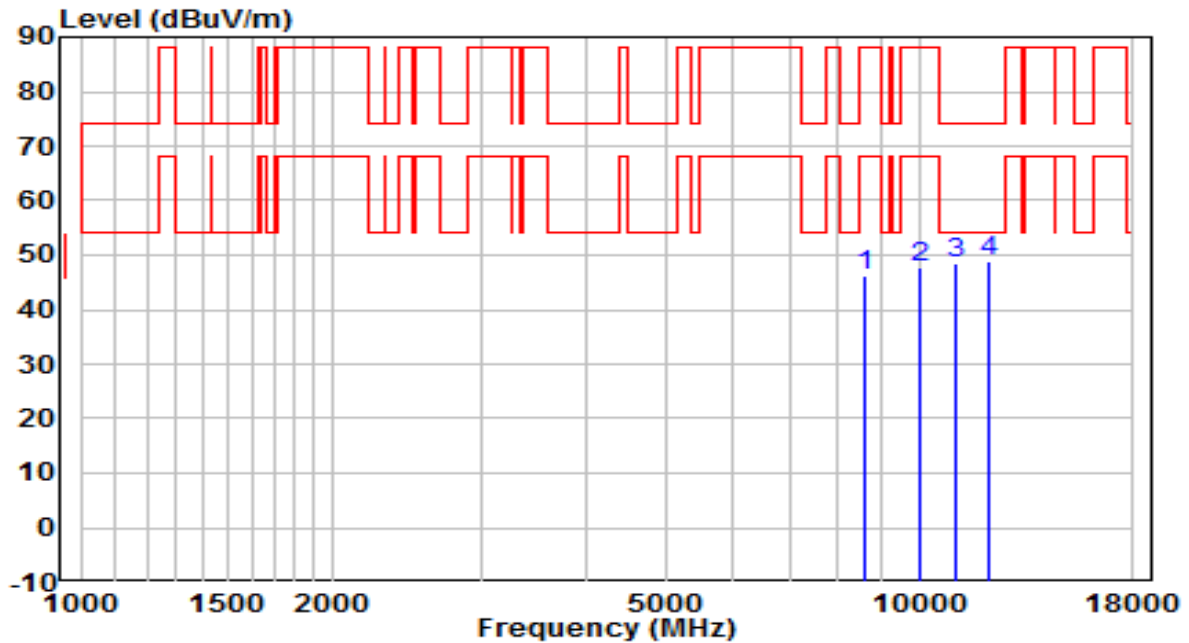


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8633.000	35.64	10.66	46.30	-41.90	88.20	Peak
2	10035.500	34.93	12.95	47.88	-40.32	88.20	Peak
3	11089.500	34.79	13.62	48.41	-25.59	74.00	Peak
4	* 12143.500	35.99	12.94	48.93	-25.07	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6465MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

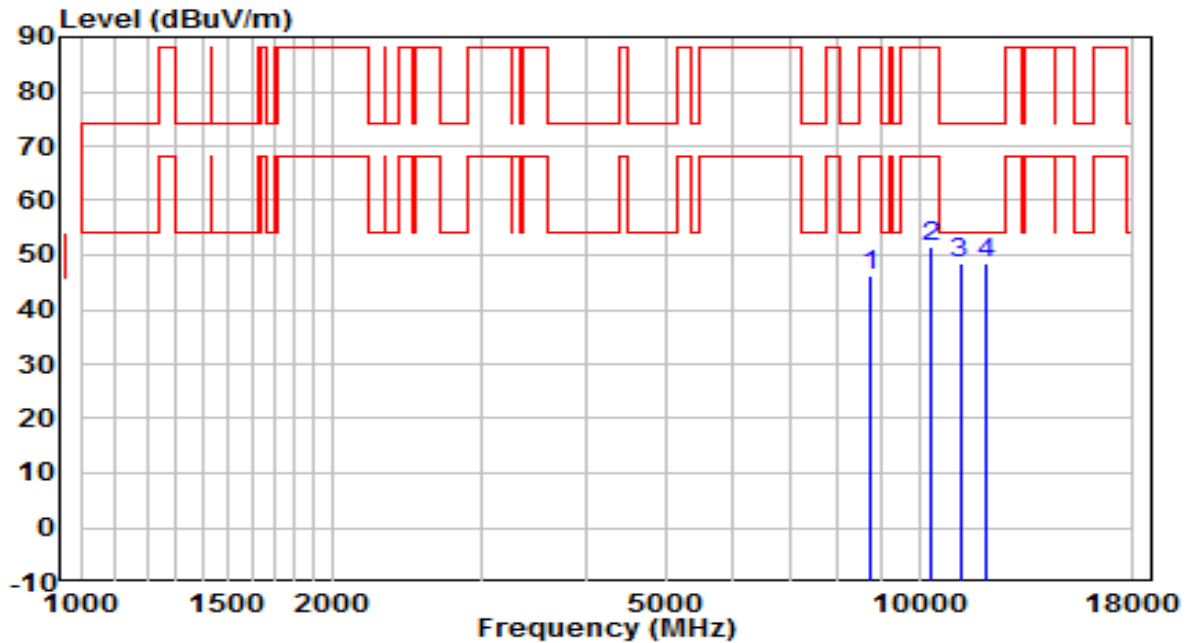


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8769.000	34.85	11.20	46.06	-42.14	88.20	Peak
2	10358.500	37.76	13.56	51.32	-36.88	88.20	Peak
3	11183.000	35.02	13.44	48.46	-25.54	74.00	Peak
4	* 12024.500	35.99	12.66	48.66	-25.34	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6545MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

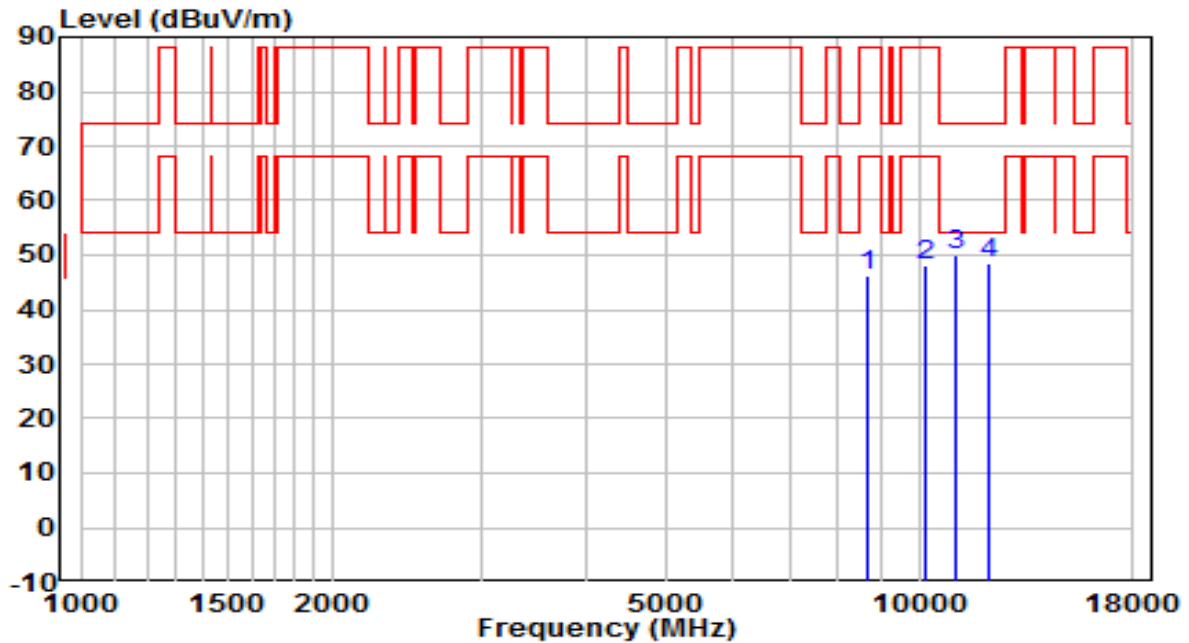


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8709.500	35.26	11.02	46.28	-41.92	88.20	Peak
2	10180.000	34.69	13.48	48.17	-40.03	88.20	Peak
3	* 11072.500	36.46	13.70	50.16	-23.84	74.00	Peak
4	12152.000	35.63	12.91	48.54	-25.46	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6545MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

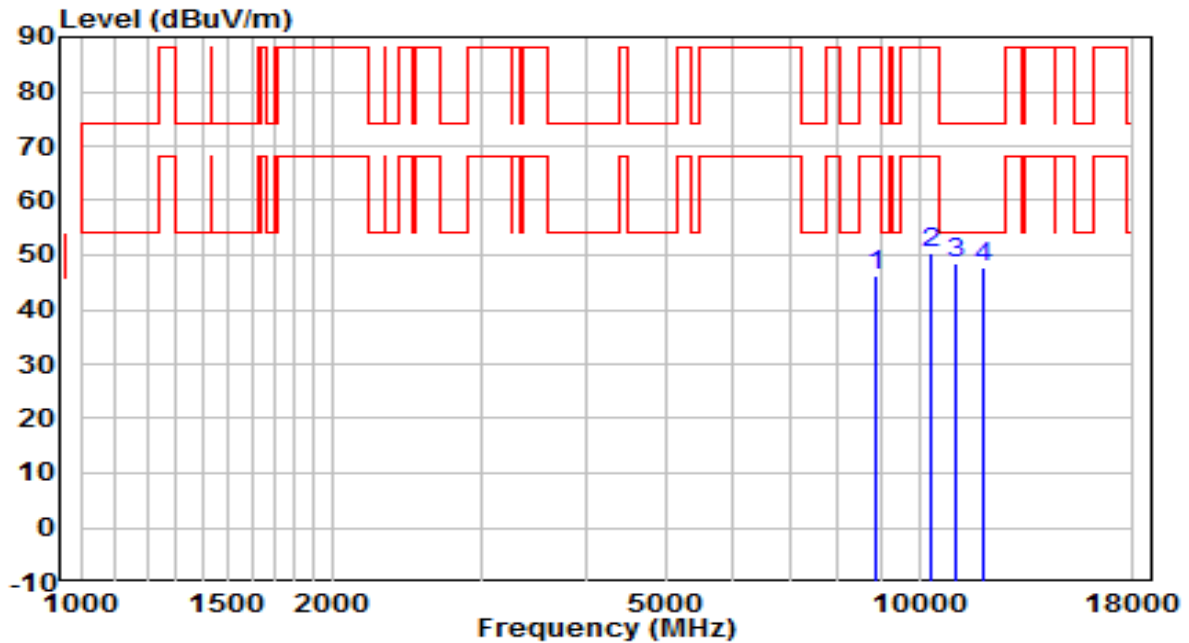


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8854.000	34.77	11.28	46.05	-42.15	88.20	Peak
2	10358.500	36.67	13.56	50.23	-37.97	88.20	Peak
3	* 11055.500	34.80	13.72	48.52	-25.48	74.00	Peak
4	11956.500	34.98	12.64	47.61	-26.39	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6625MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

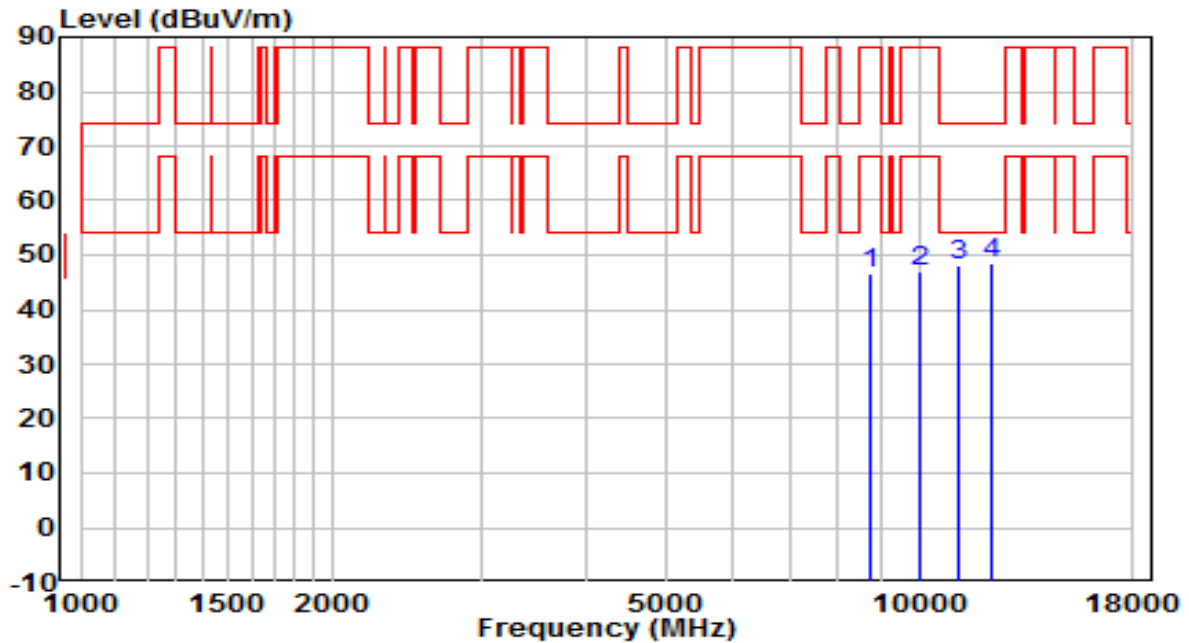


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8726.500	35.66	10.95	46.60	-41.60	88.20	Peak
2	10018.500	34.09	13.04	47.12	-41.08	88.20	Peak
3	11115.000	34.53	13.45	47.98	-26.02	74.00	Peak
4	* 12186.000	35.50	12.97	48.48	-25.52	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6625MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

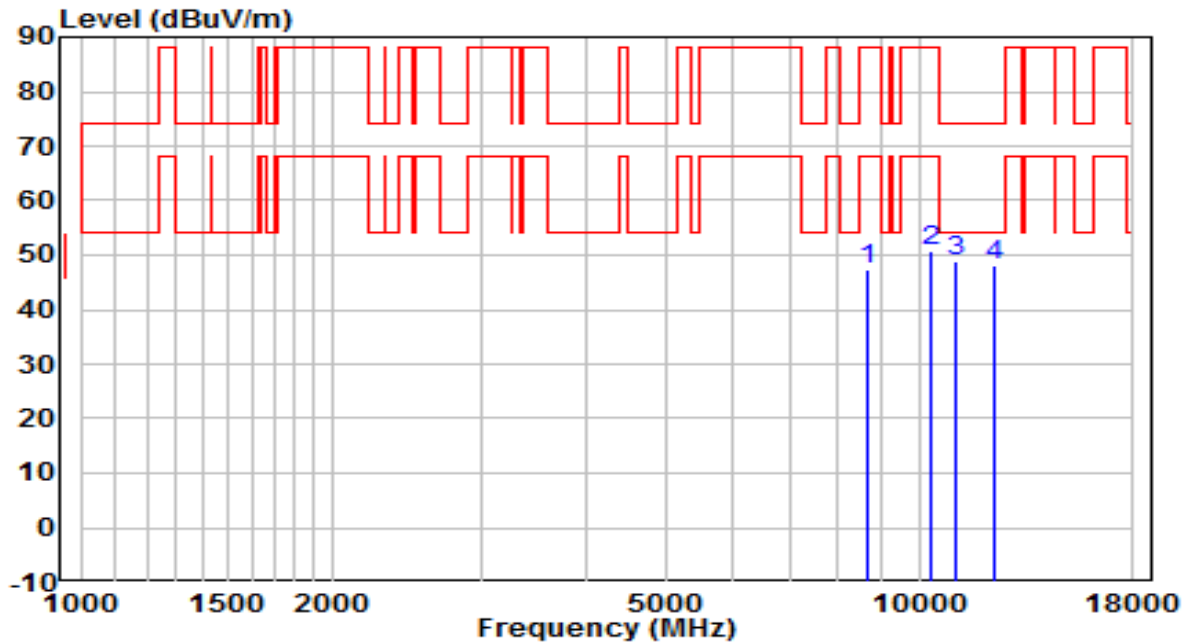


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8692.500	36.31	10.88	47.18	-41.02	88.20	Peak
2	10358.500	37.02	13.56	50.59	-37.61	88.20	Peak
3	* 11064.000	35.34	13.69	49.03	-24.97	74.00	Peak
4	12279.500	35.37	12.81	48.18	-25.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6705MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

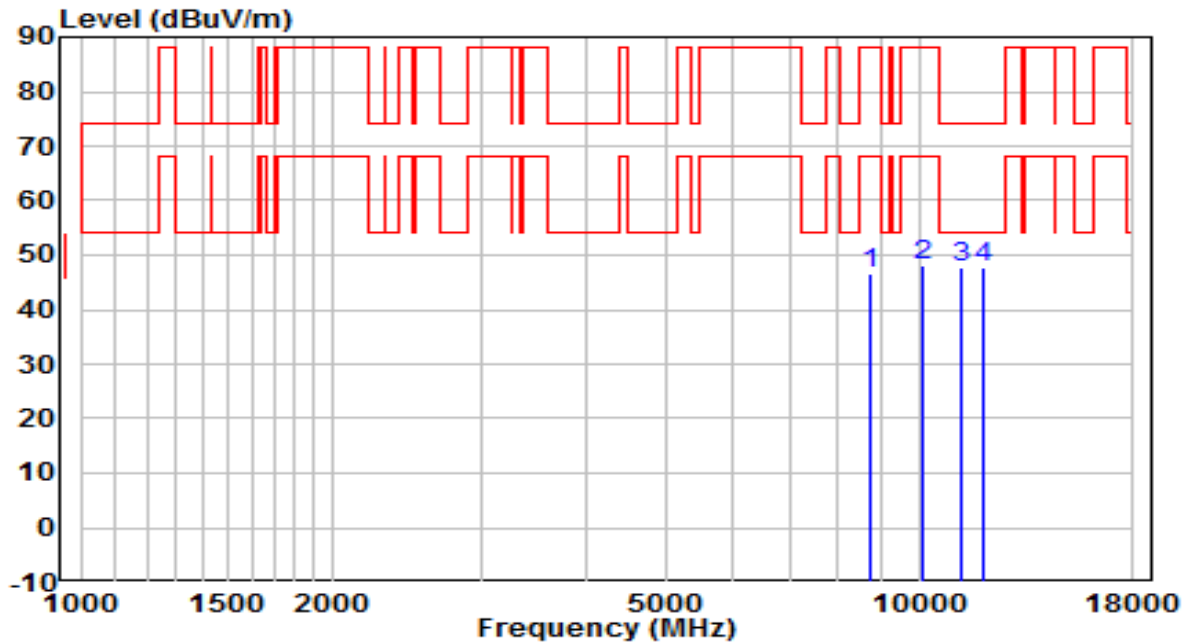


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8752.000	35.46	11.02	46.48	-41.72	88.20	Peak
2	10129.000	34.92	13.30	48.22	-39.98	88.20	Peak
3	11251.000	34.36	13.29	47.66	-26.34	74.00	Peak
4	* 11888.500	35.10	12.57	47.68	-26.32	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6705MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

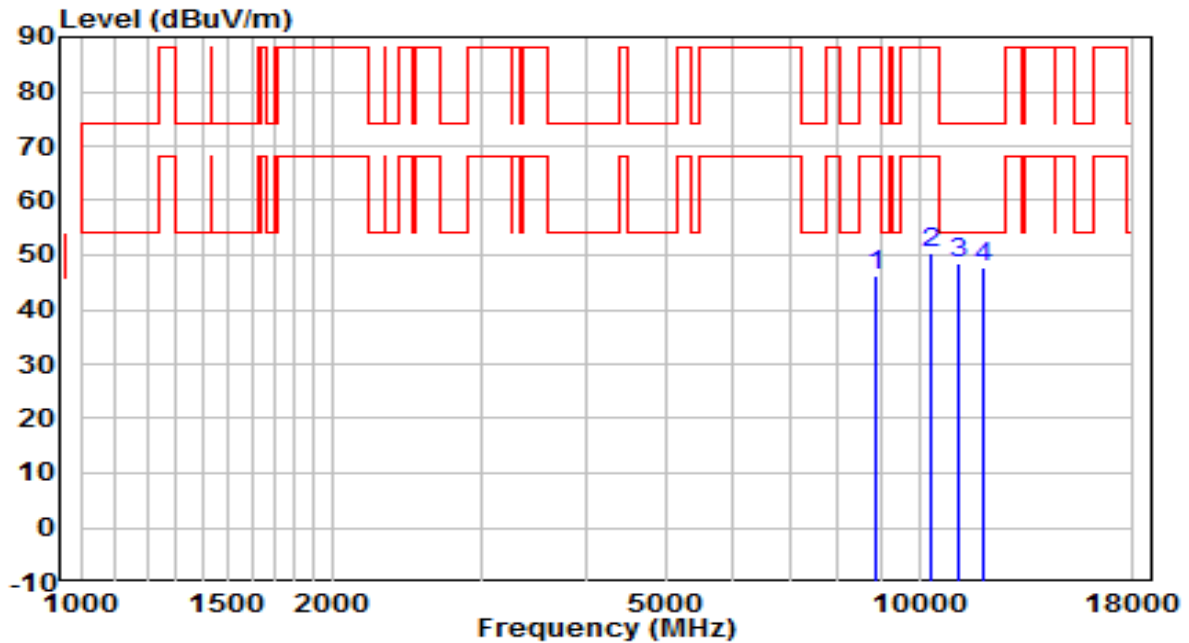


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8896.500	35.10	11.16	46.25	-41.95	88.20	Peak
2	10358.500	36.72	13.56	50.28	-37.92	88.20	Peak
3	* 11123.500	35.09	13.41	48.50	-25.50	74.00	Peak
4	11965.000	35.01	12.57	47.58	-26.42	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6865MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

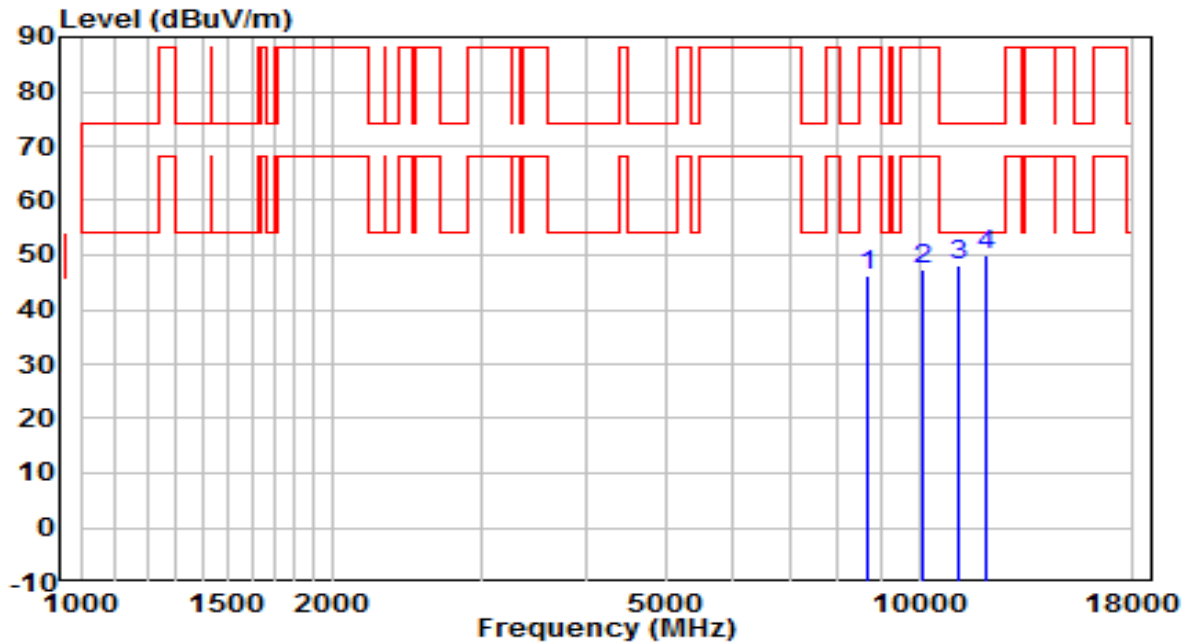


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8709.500	35.08	11.02	46.09	-42.11	88.20	Peak
2	10129.000	34.06	13.30	47.36	-40.84	88.20	Peak
3	11106.500	34.75	13.48	48.23	-25.77	74.00	Peak
4	* 12050.000	37.17	12.75	49.92	-24.08	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6865MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

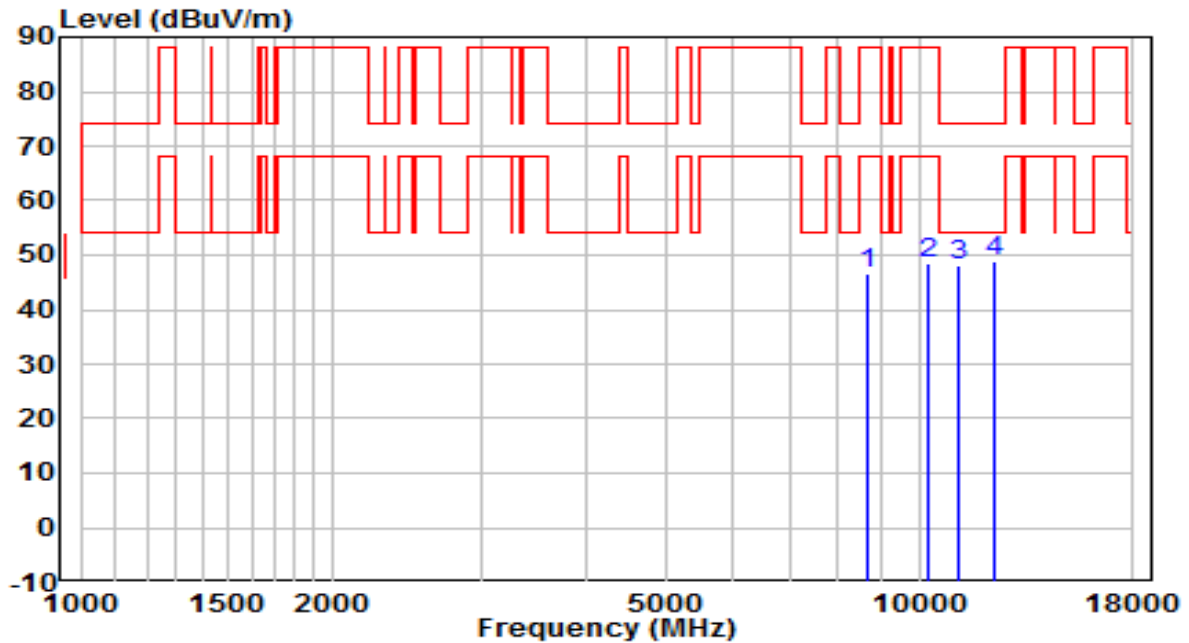


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8692.500	35.61	10.88	46.49	-41.71	88.20	Peak
2	10256.500	35.14	13.35	48.49	-39.71	88.20	Peak
3	11149.000	34.59	13.38	47.97	-26.03	74.00	Peak
4	* 12288.000	36.12	12.89	49.01	-24.99	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6945MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

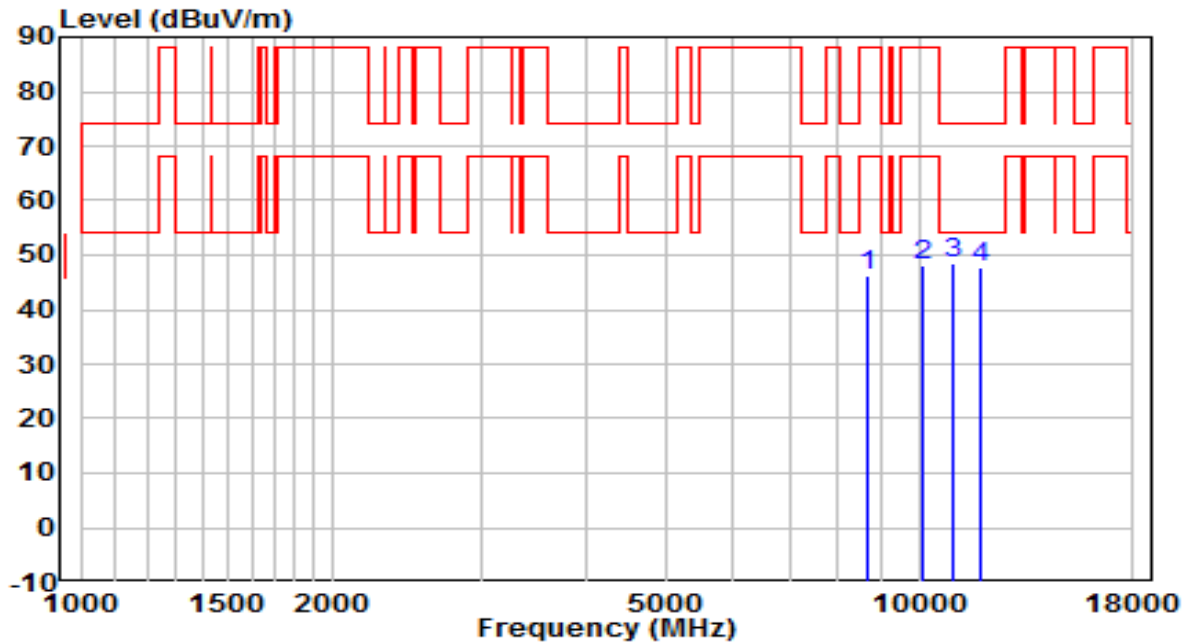


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8701.000	35.20	10.95	46.15	-42.05	88.20	Peak
2	10069.500	34.80	13.19	47.99	-40.21	88.20	Peak
3	* 10996.000	34.63	13.78	48.41	-25.59	74.00	Peak
4	11863.000	35.14	12.58	47.71	-26.29	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 6945MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

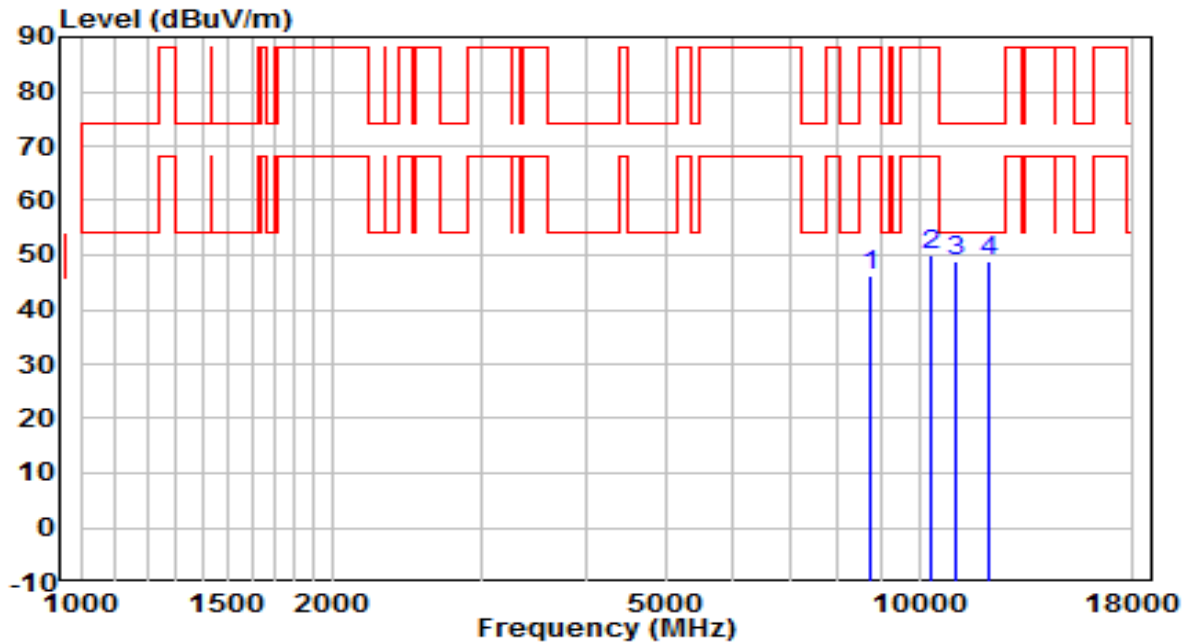


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8769.000	34.97	11.20	46.17	-42.03	88.20	Peak
2	10358.500	36.57	13.56	50.13	-38.07	88.20	Peak
3	11047.000	35.09	13.75	48.84	-25.16	74.00	Peak
4	* 12152.000	36.12	12.91	49.03	-24.97	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

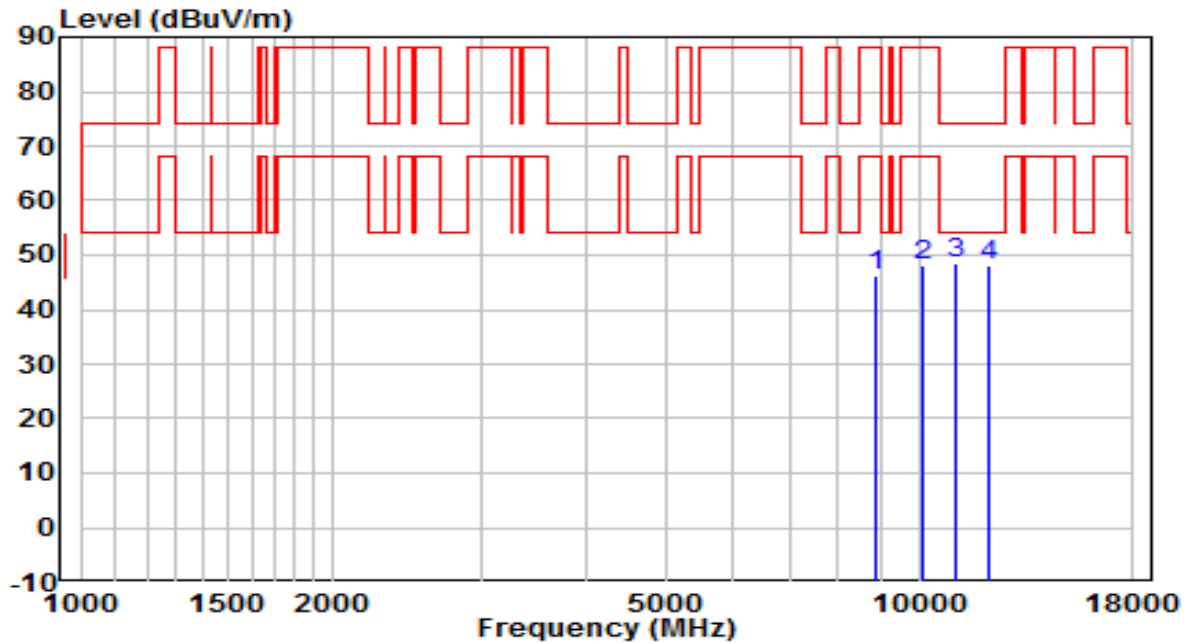


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8862.500	34.81	11.35	46.16	-42.04	88.20	Peak
2	10078.000	34.83	13.32	48.15	-40.05	88.20	Peak
3	* 11072.500	34.65	13.70	48.36	-25.64	74.00	Peak
4	12092.500	35.18	12.95	48.14	-25.86	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

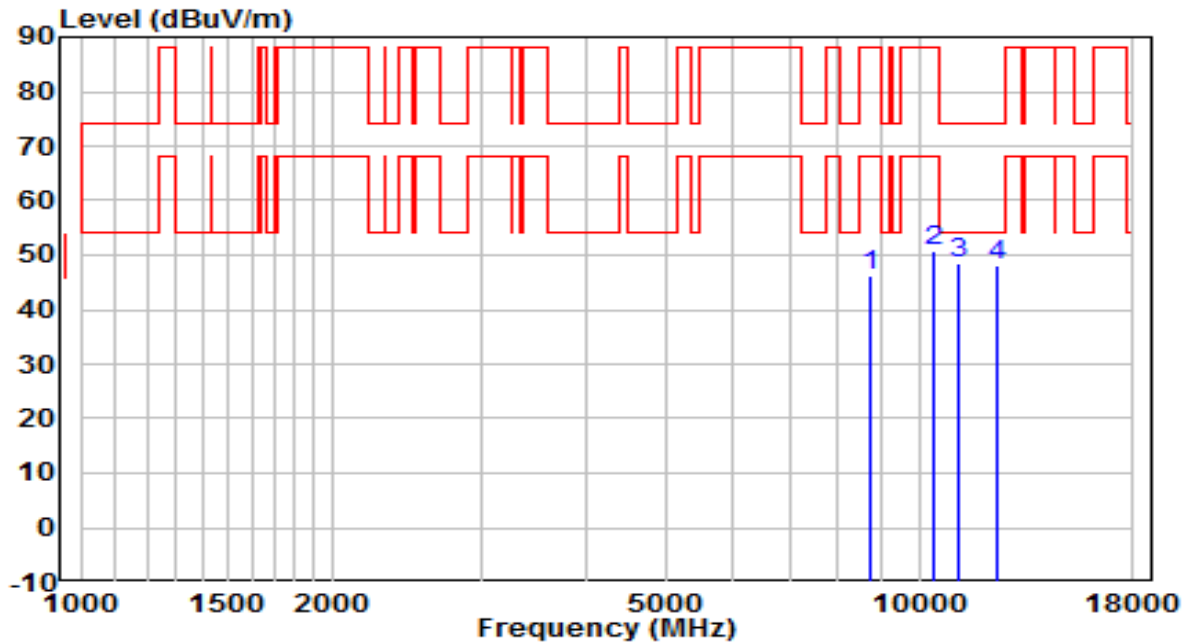


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8718.000	35.35	11.00	46.35	-41.85	88.20	Peak
2	10409.500	37.17	13.70	50.87	-37.33	88.20	Peak
3	* 11157.500	35.17	13.38	48.56	-25.44	74.00	Peak
4	12432.500	35.47	12.77	48.24	-25.76	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>ss</sub> =4	Test Voltage	120V/60Hz

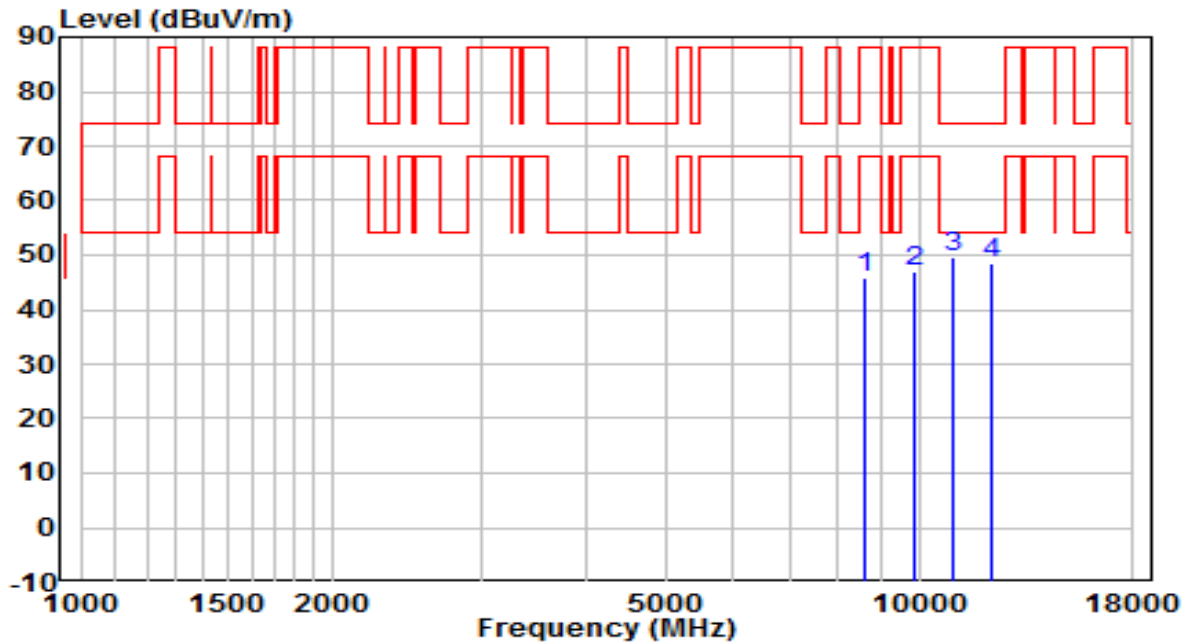


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8599.000	35.28	10.50	45.78	-42.42	88.20	Peak
2	9882.500	34.12	12.90	47.02	-41.18	88.20	Peak
3	* 10979.000	35.96	13.72	49.68	-24.32	74.00	Peak
4	12194.500	35.46	13.07	48.54	-25.46	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

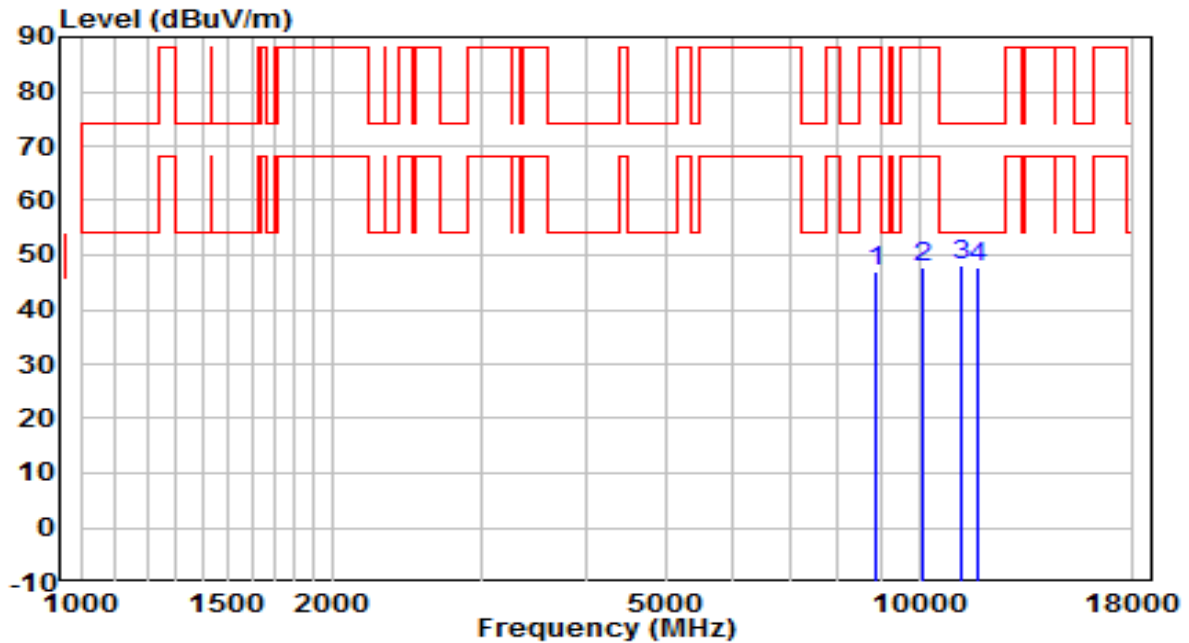


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8871.000	35.39	11.42	46.81	-41.39	88.20	Peak
2	10120.500	34.77	13.05	47.81	-40.39	88.20	Peak
3	* 11208.500	34.89	13.29	48.19	-25.81	74.00	Peak
4	11769.500	35.30	12.53	47.84	-26.16	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6185MHz N <sub>ss</sub> =4	Test Voltage	120V/60Hz

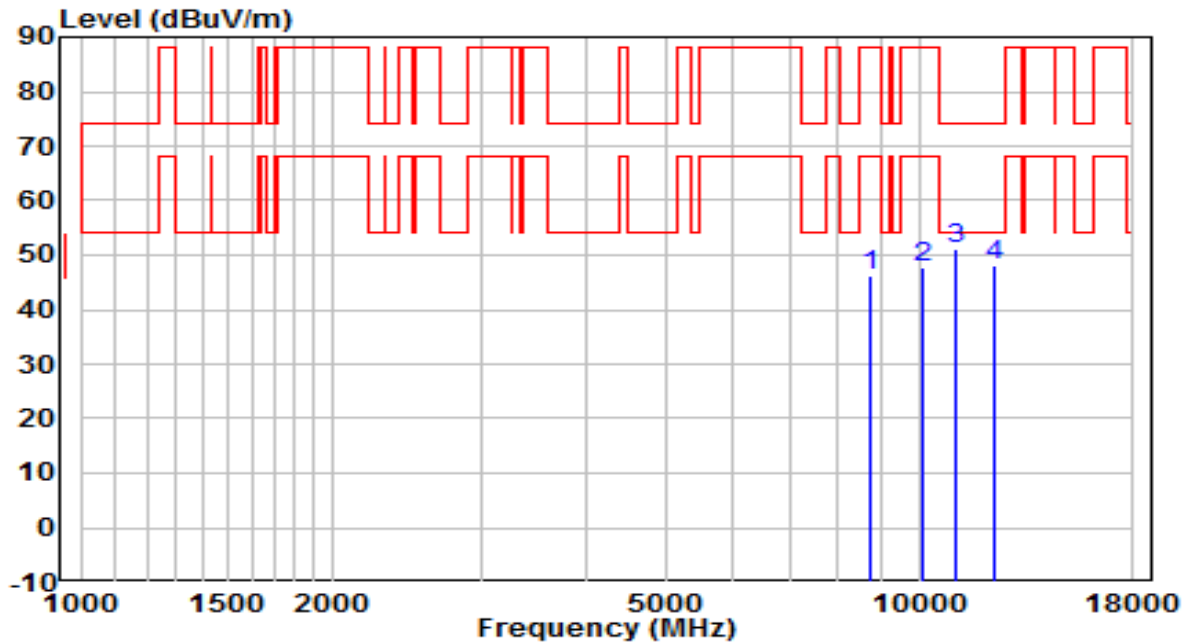


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8752.000	35.39	11.02	46.41	-41.79	88.20	Peak
2	10120.500	34.62	13.05	47.67	-40.53	88.20	Peak
3	* 11038.500	37.22	13.76	50.97	-23.03	74.00	Peak
4	12279.500	35.24	12.81	48.05	-25.95	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6185MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

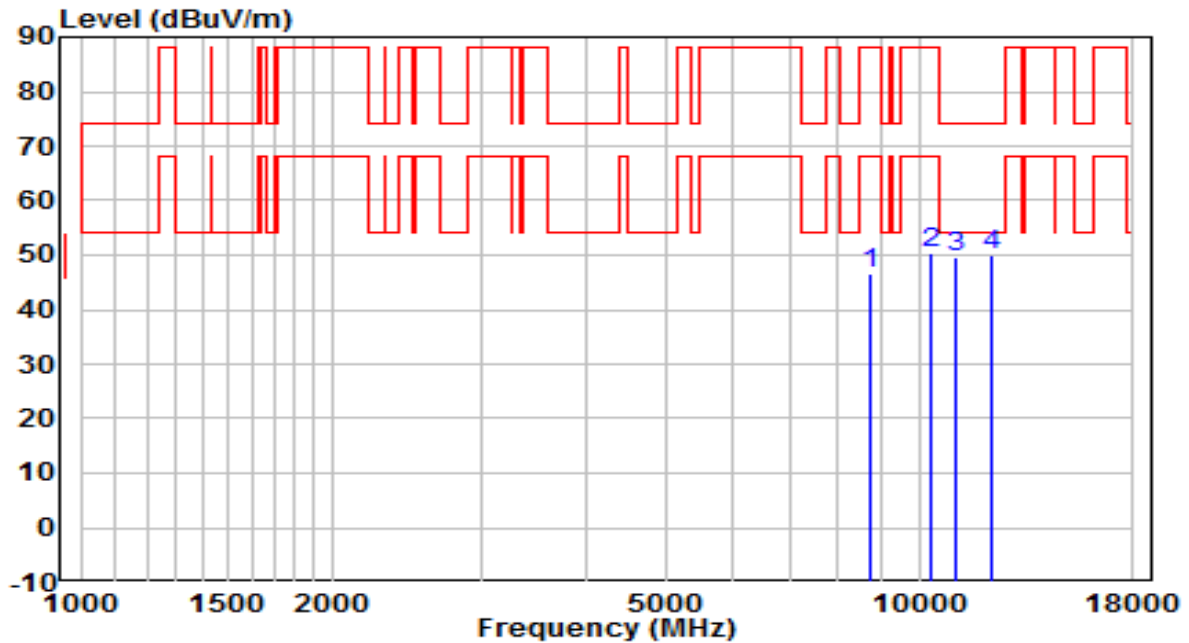


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8760.500	35.53	11.15	46.68	-41.52	88.20	Peak
2	10358.500	36.72	13.56	50.28	-37.92	88.20	Peak
3	11072.500	35.75	13.70	49.45	-24.55	74.00	Peak
4	* 12237.000	36.89	12.98	49.87	-24.13	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6345MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

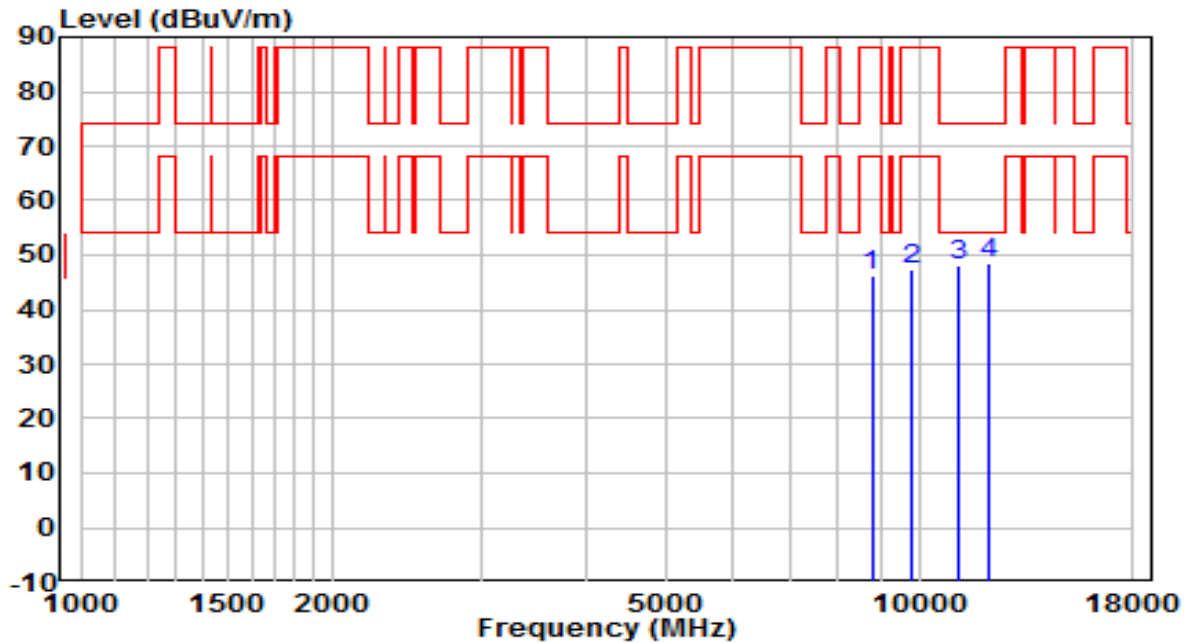


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8777.500	35.09	11.17	46.26	-41.94	88.20	Peak
2	9797.500	34.82	12.72	47.53	-40.67	88.20	Peak
3	11123.500	34.59	13.41	48.00	-26.00	74.00	Peak
4	* 12152.000	35.54	12.91	48.45	-25.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6345MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

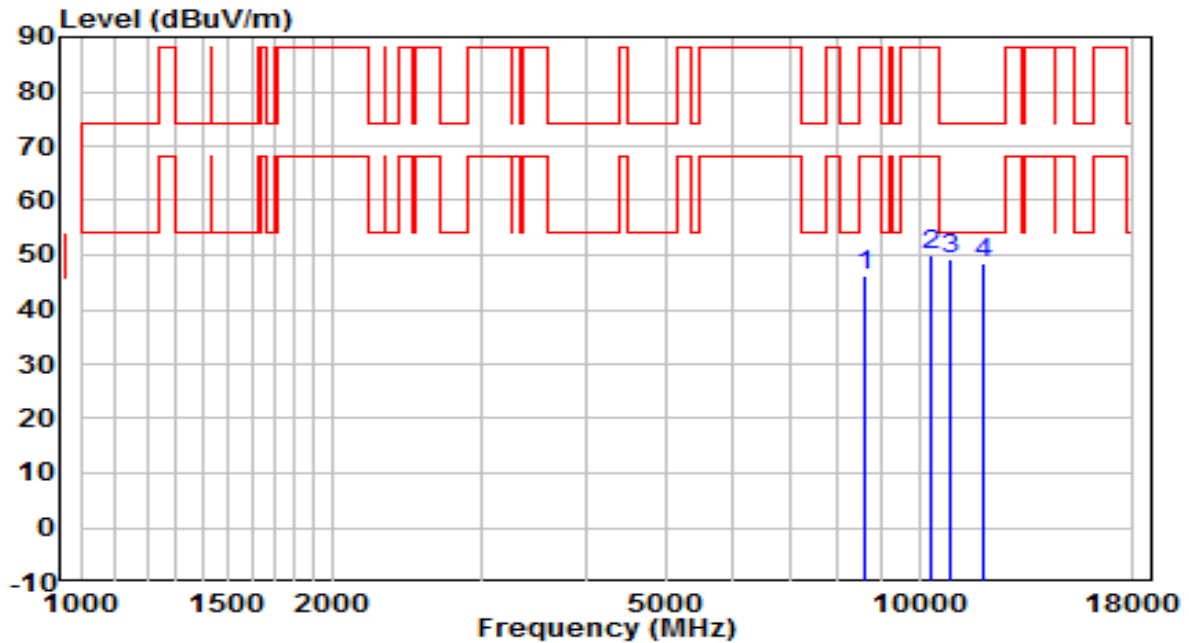


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8641.500	35.58	10.66	46.24	-41.96	88.20	Peak
2	10358.500	36.39	13.56	49.96	-38.24	88.20	Peak
3	* 10894.000	35.35	13.84	49.18	-24.82	74.00	Peak
4	11897.000	35.82	12.56	48.38	-25.62	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6505MHz N <sub>ss</sub> =4	Test Voltage	120V/60Hz

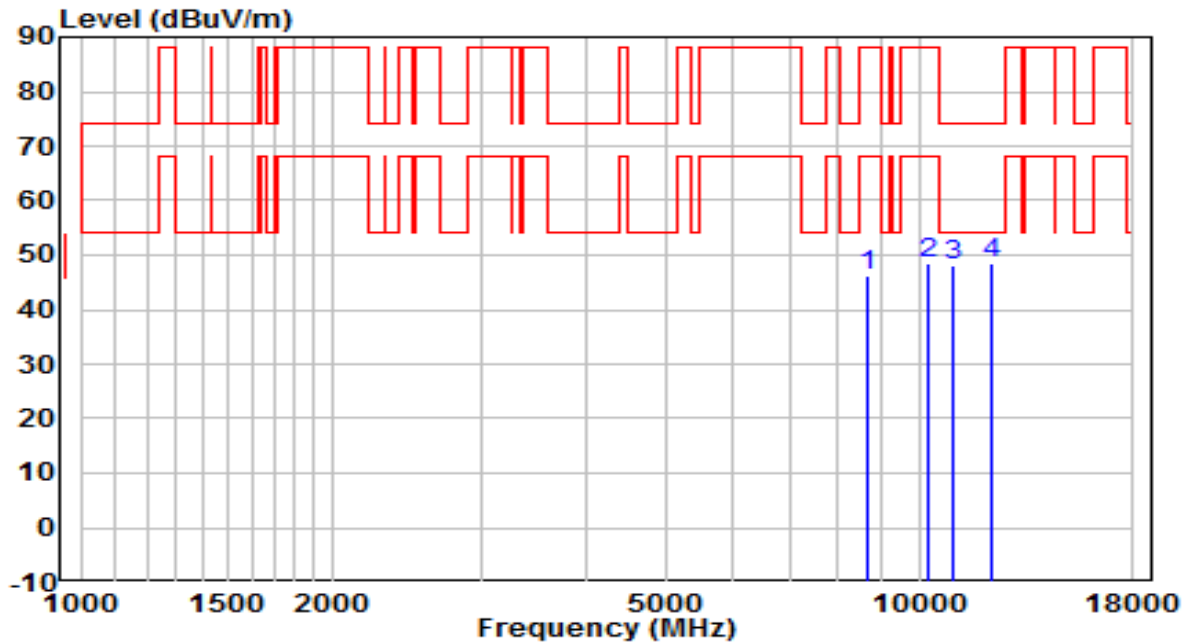


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8692.500	35.19	10.88	46.07	-42.13	88.20	Peak
2	10273.500	34.88	13.43	48.31	-39.89	88.20	Peak
3	10979.000	34.43	13.72	48.15	-25.85	74.00	Peak
4	* 12160.500	35.57	12.84	48.41	-25.59	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6505MHz N <sub>ss</sub> =4	Test Voltage	120V/60Hz

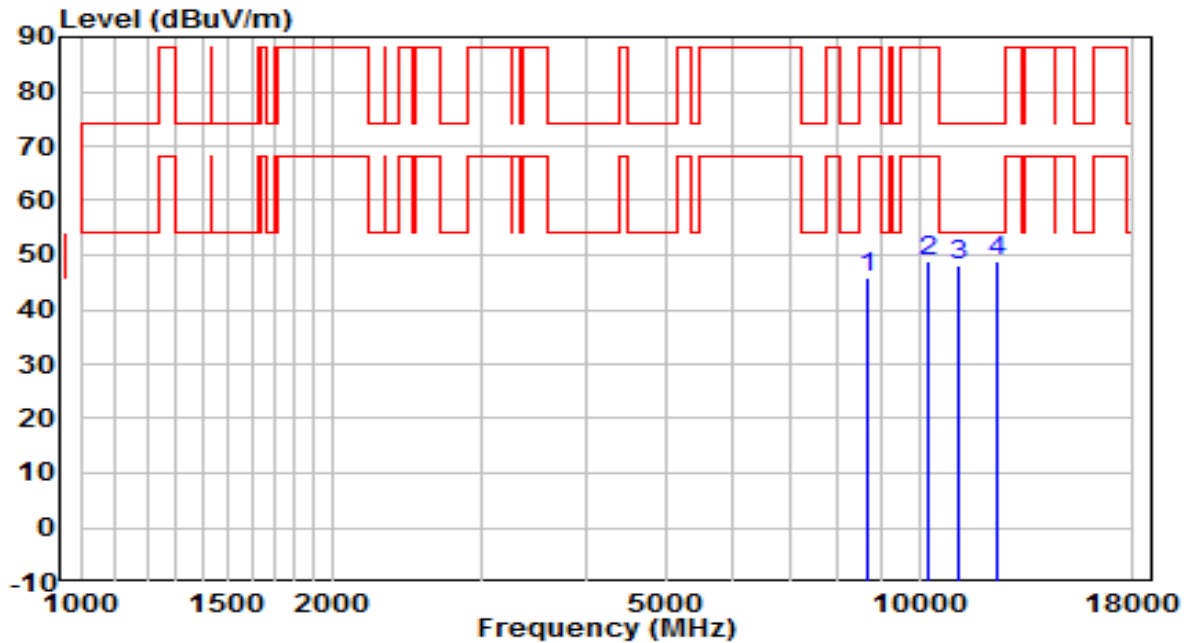


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8701.000	34.79	10.95	45.74	-42.46	88.20	Peak
2	10265.000	35.46	13.38	48.83	-39.37	88.20	Peak
3	11132.000	34.92	13.36	48.28	-25.72	74.00	Peak
4	* 12373.000	36.09	12.65	48.73	-25.27	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6665MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

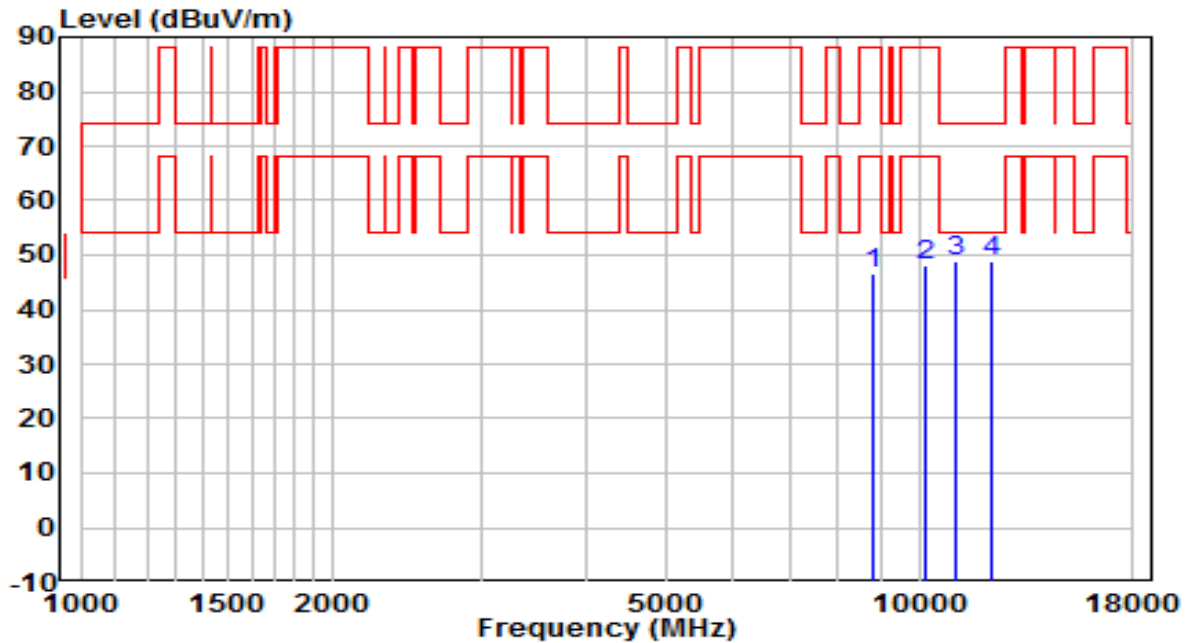


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8803.000	35.34	11.17	46.52	-41.68	88.20	Peak
2	10146.000	34.94	13.23	48.17	-40.03	88.20	Peak
3	11021.500	35.19	13.73	48.92	-25.08	74.00	Peak
4	* 12169.000	36.17	12.85	49.02	-24.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6665MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

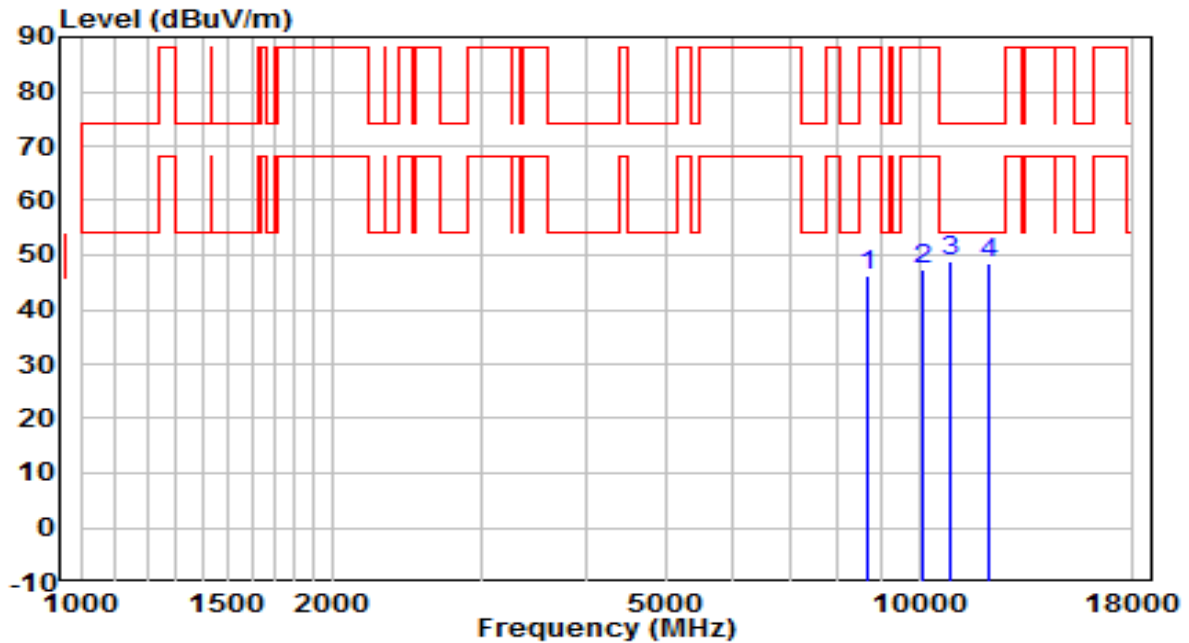


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8692.500	35.36	10.88	46.24	-41.96	88.20	Peak
2	10129.000	34.22	13.30	47.52	-40.68	88.20	Peak
3	* 10885.500	35.10	13.90	49.00	-25.00	74.00	Peak
4	12067.000	35.64	12.82	48.46	-25.54	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6825MHz N <sub>ss</sub> =4	Test Voltage	120V/60Hz

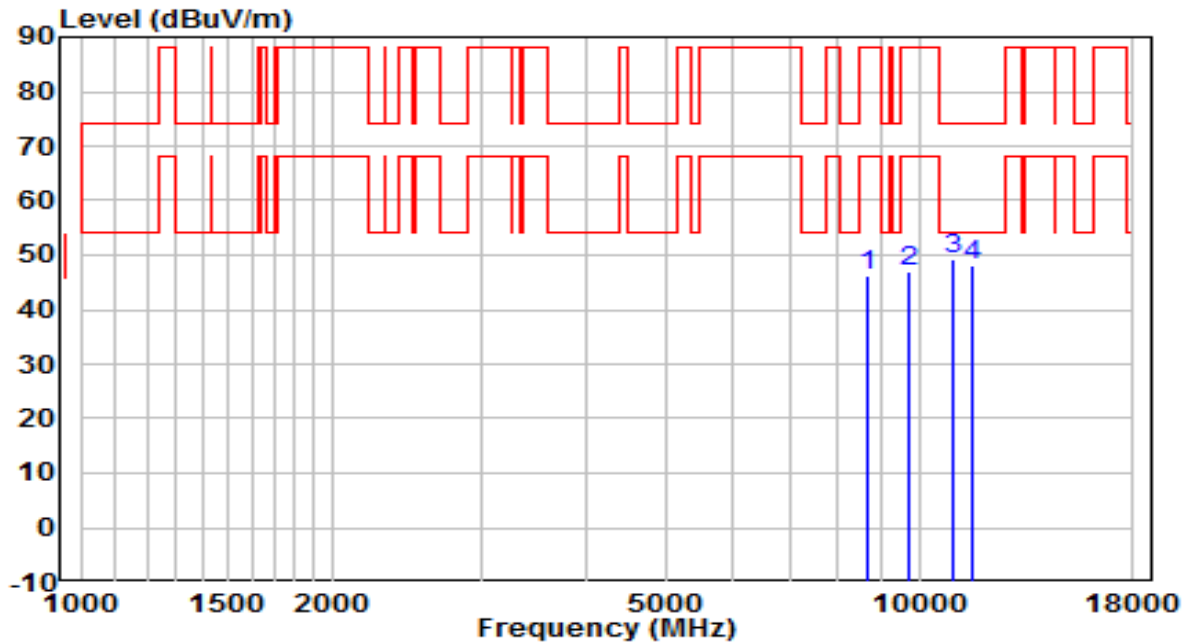


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8692.500	35.24	10.88	46.12	-42.08	88.20	Peak
2	9738.000	34.31	12.69	47.00	-41.20	88.20	Peak
3	* 10962.000	35.51	13.75	49.26	-24.74	74.00	Peak
4	11608.000	35.09	12.94	48.03	-25.97	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6825MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

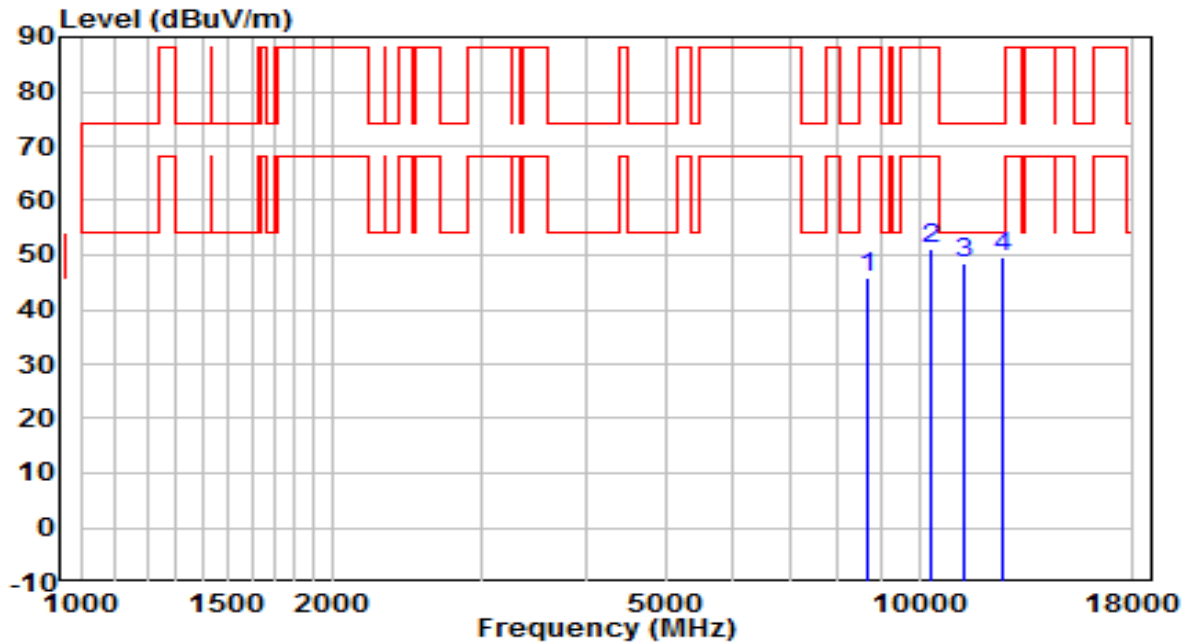


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8684.000	35.13	10.86	45.99	-42.21	88.20	Peak
2	10358.500	37.59	13.56	51.15	-37.05	88.20	Peak
3	11285.000	34.97	13.44	48.41	-25.59	74.00	Peak
4	* 12594.000	36.73	13.04	49.77	-24.23	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

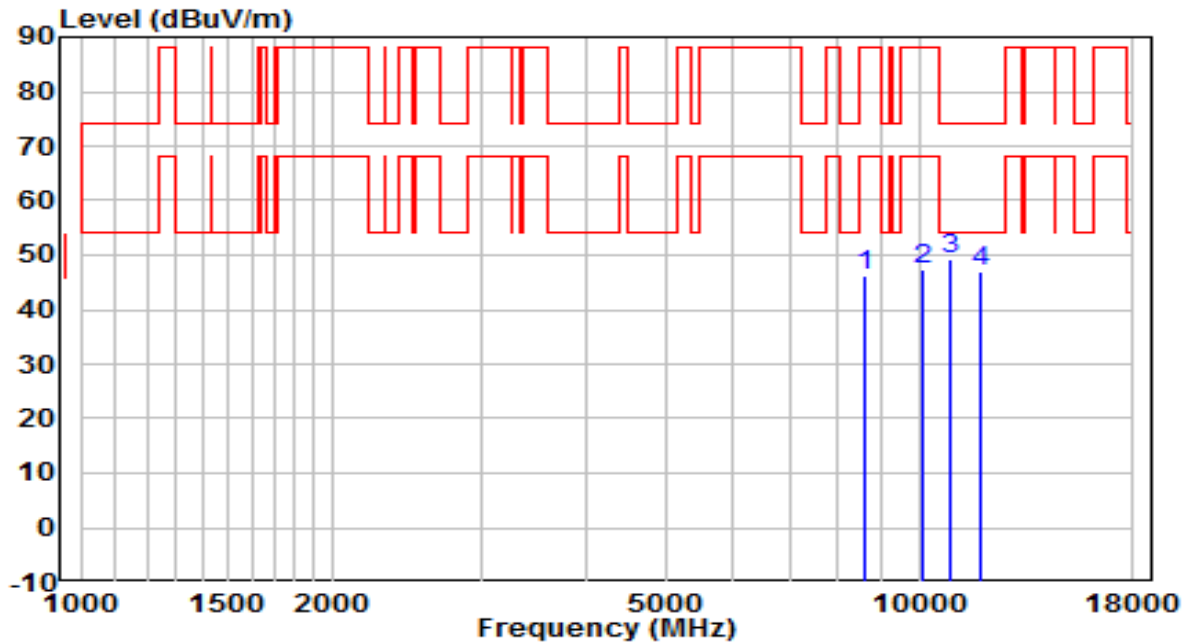


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8633.000	35.41	10.66	46.07	-42.13	88.20	Peak
2	10086.500	34.34	13.14	47.48	-40.72	88.20	Peak
3	* 10868.500	35.46	13.89	49.36	-24.64	74.00	Peak
4	11854.500	34.46	12.66	47.13	-26.87	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Tommy Tang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

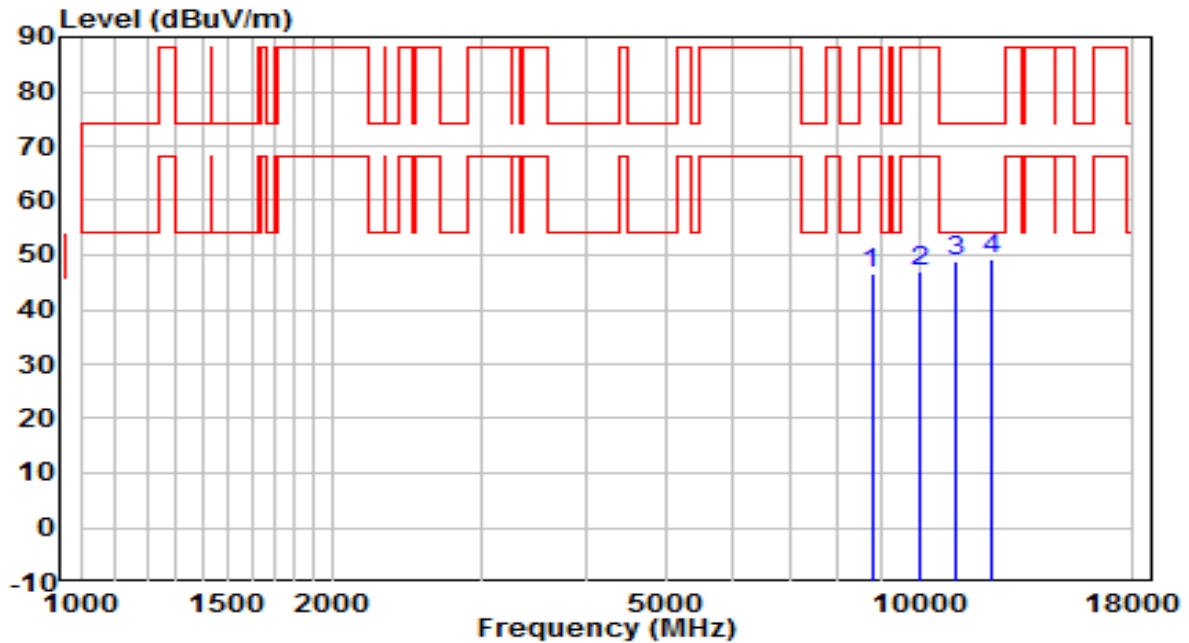


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8777.500	35.43	11.17	46.60	-41.60	88.20	Peak
2	10010.000	34.07	12.93	47.00	-41.20	88.20	Peak
3	11030.000	35.28	13.75	49.02	-24.98	74.00	Peak
4	* 12203.000	36.12	12.99	49.11	-24.89	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**The Result of Radiated Emission below 1GHz:**

EUT	ACCESS POINT	Date of Test	2022-03-15
Factor	FMZB 1519B (9KHz~30MHz)_2021	Temp. / Humidity	24.3°C /44.5%
Polarity	Face on	Site / Test Engineer	AC1 / Charles Zhang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

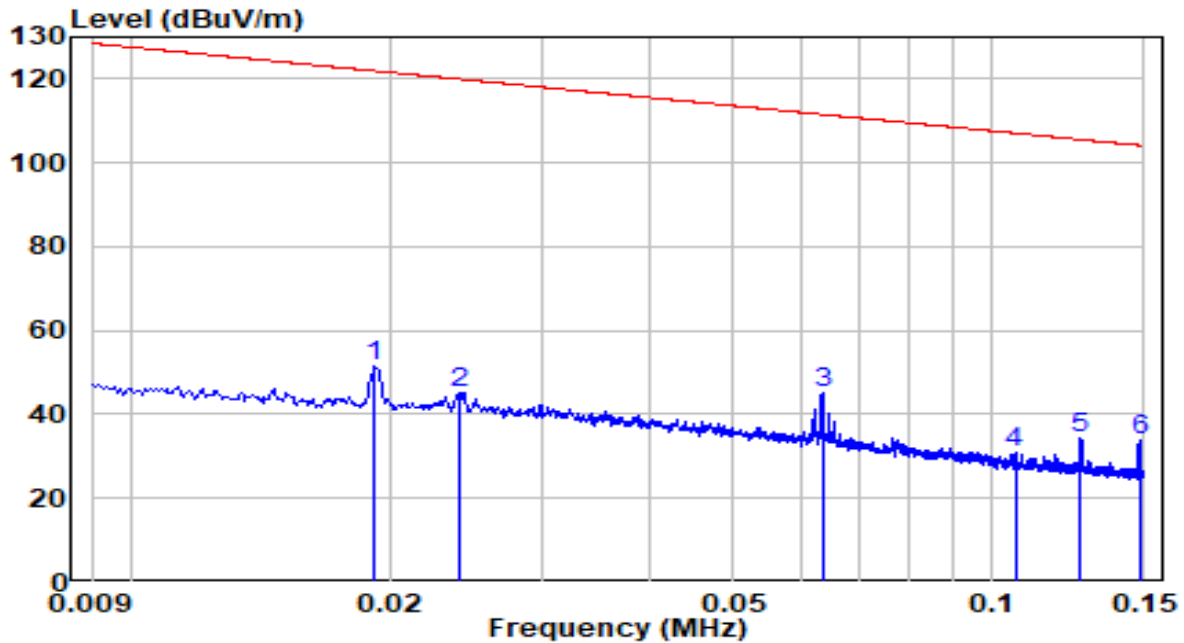


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	0.019	33.04	18.50	51.55	-70.40	121.94	Peak
2	0.024	26.20	18.98	45.18	-74.77	119.95	Peak
3	* 0.063	25.91	19.19	45.10	-66.45	111.55	Peak
4	0.106	12.33	18.42	30.75	-76.32	107.07	Peak
5	0.127	15.72	18.49	34.21	-71.33	105.54	Peak
6	0.148	15.29	18.55	33.84	-70.35	104.19	Peak

**Note:**

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-03-15
Factor	FMZB1519_0.009-30MHz	Temp. / Humidity	24.3°C /44.5%
Polarity	Face off	Site / Test Engineer	AC1 / Charles Zhang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

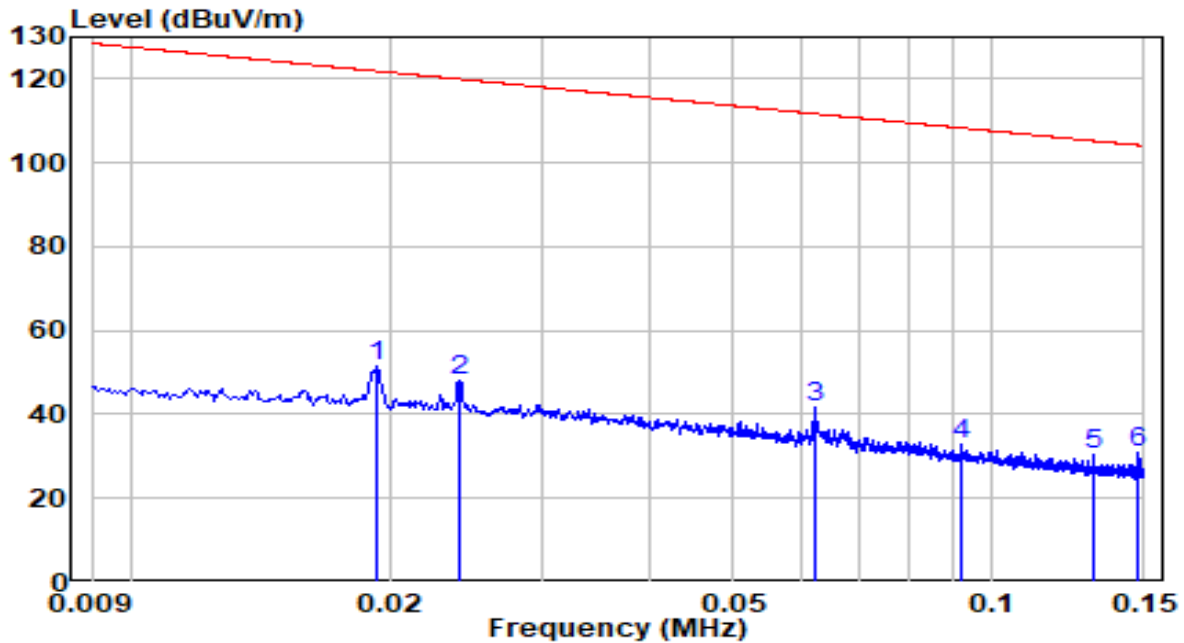


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	0.019	30.39	21.20	51.59	-70.29	121.88	Peak
2	0.024	27.05	21.09	48.14	-71.81	119.95	Peak
3	* 0.062	21.39	20.28	41.66	-70.06	111.72	Peak
4	0.092	12.78	20.21	32.99	-75.33	108.32	Peak
5	0.131	10.19	20.18	30.37	-74.89	105.26	Peak
6	0.148	10.61	20.18	30.79	-73.42	104.21	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-03-15
Factor	FMZB1519_0.009-30MHz	Temp. / Humidity	24.3°C /44.5%
Polarity	Face on	Site / Test Engineer	AC1 / Charles Zhang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

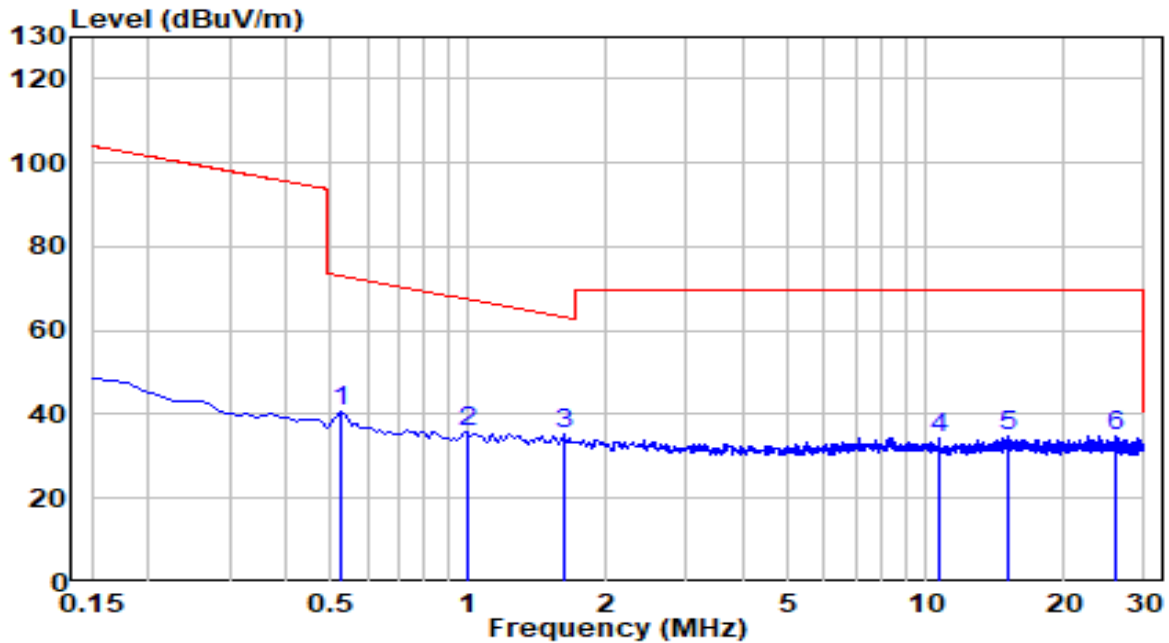


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	0.523	20.36	20.38	40.74	-32.49	73.23	Peak
2	1.001	15.26	20.47	35.74	-31.88	67.62	Peak
3	* 1.628	14.79	20.32	35.11	-28.29	63.40	Peak
4	10.702	14.07	20.18	34.25	-35.25	69.50	Peak
5	15.105	15.05	20.00	35.04	-34.46	69.50	Peak
6	26.075	14.93	19.83	34.77	-34.73	69.50	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-03-15
Factor	FMZB1519_0.009-30MHz	Temp. / Humidity	24.3°C /44.5%
Polarity	Face off	Site / Test Engineer	AC1 / Charles Zhang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

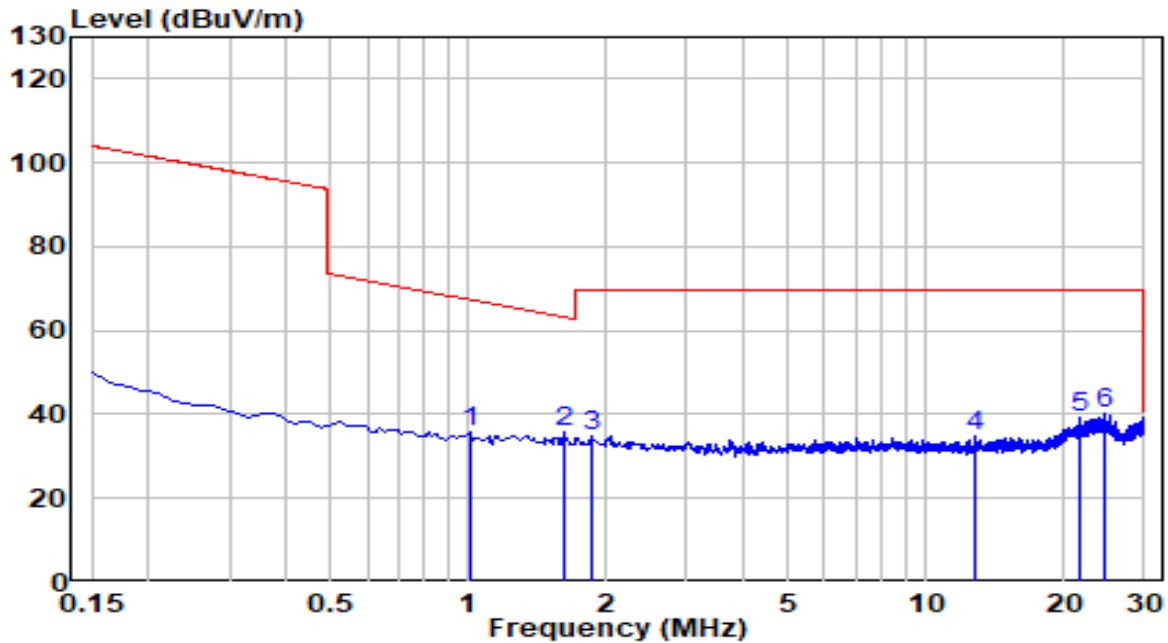


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	1.016	15.45	20.47	35.92	-31.57	67.49	Peak
2	* 1.613	15.24	20.33	35.57	-27.92	63.48	Peak
3	1.851	14.49	20.28	34.77	-34.73	69.50	Peak
4	12.866	14.95	20.06	35.01	-34.49	69.50	Peak
5	21.821	19.26	19.86	39.12	-30.38	69.50	Peak
6	24.537	20.29	19.86	40.14	-29.36	69.50	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-02-15
Factor	AC1_VULB 9168 _30-1000MHz	Temp. / Humidity	22.2°C /39.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

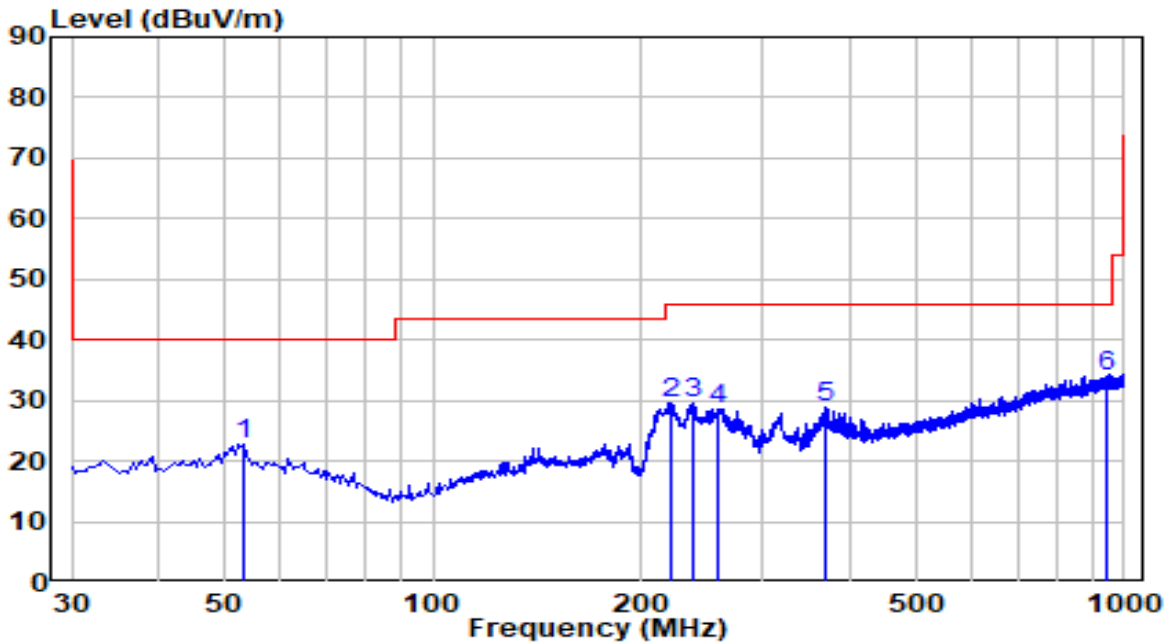


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	53.280	4.89	17.94	22.83	-17.17	40.00	Peak
2	220.605	15.17	14.52	29.69	-16.31	46.00	Peak
3	238.550	13.15	16.25	29.40	-16.60	46.00	Peak
4	259.405	11.77	16.80	28.57	-17.43	46.00	Peak
5	368.045	8.80	19.98	28.78	-17.22	46.00	Peak
6	* 941.315	3.93	29.99	33.92	-12.08	46.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	ACCESS POINT	Date of Test	2022-02-15
Factor	AC1_VULB 9168 _30-1000MHz	Temp. / Humidity	22.2°C /39.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

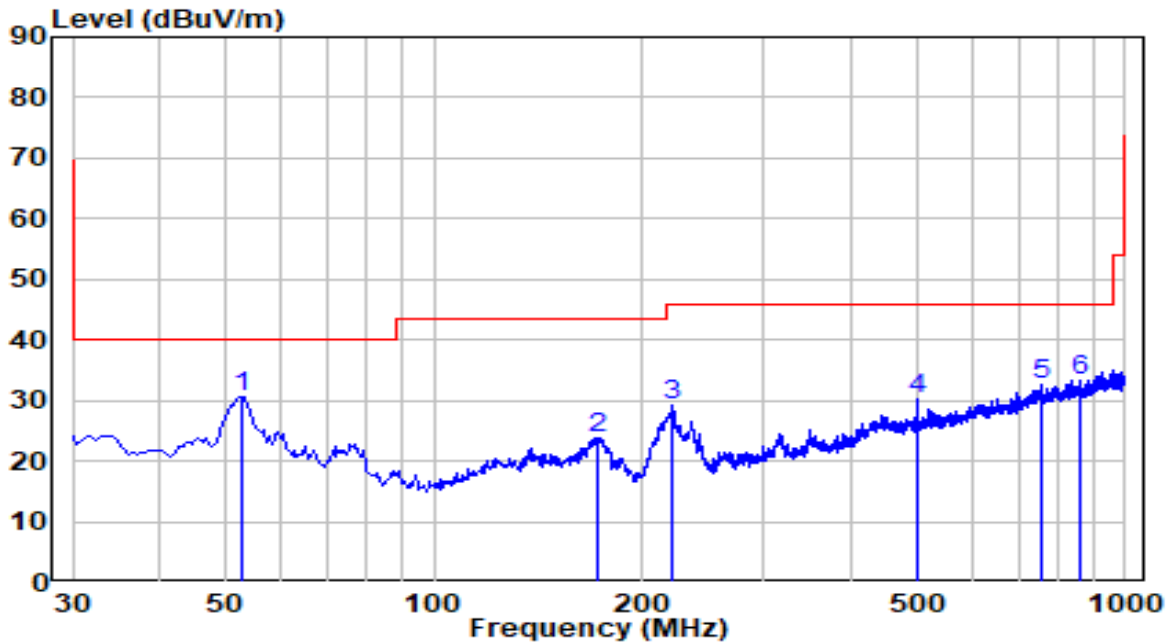


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 52.795	12.74	17.96	30.70	-9.30	40.00	Peak
2	173.075	6.75	17.12	23.88	-19.62	43.50	Peak
3	221.090	14.58	14.53	29.11	-16.89	46.00	Peak
4	499.965	6.96	23.11	30.07	-15.93	46.00	Peak
5	755.560	4.38	28.16	32.53	-13.47	46.00	Peak
6	861.775	4.23	28.94	33.18	-12.82	46.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

**The Result of Radiated Spurious Emission above 18GHz:**

EUT	ACCESS POINT	Date of Test	2022-03-15
Factor	BBHA9170_18-40GHz	Temp. / Humidity	19.5°C/37.2%
Polarity	Horizontal	Site / Test Engineer	AC2 / Bob Zhang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

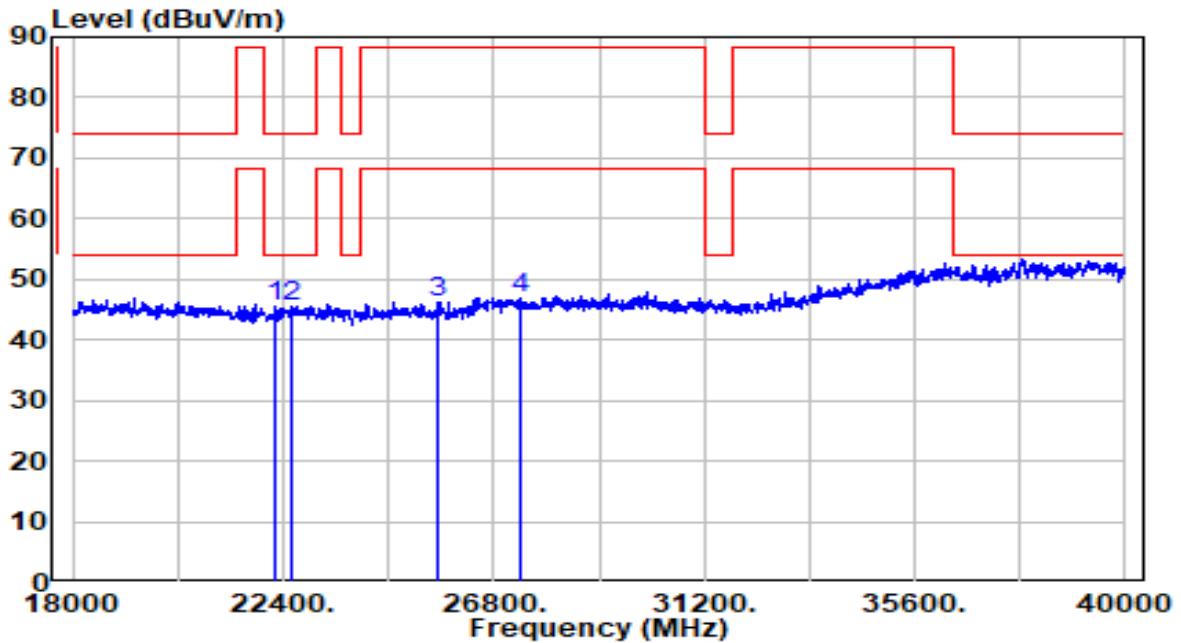


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	22224.000	53.63	-8.00	45.63	-28.37	74.00	Peak
2		22598.000	53.19	-7.72	45.47	-28.53	74.00	Peak
3		25612.000	52.71	-6.54	46.17	-42.03	88.20	Peak
4		27383.000	53.38	-6.55	46.84	-41.36	88.20	Peak

**Note:**

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-03-15
Factor	BBHA9170_18-40GHz	Temp. / Humidity	19.5°C/37.2%
Polarity	Vertical	Site / Test Engineer	AC2 / Bob Zhang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

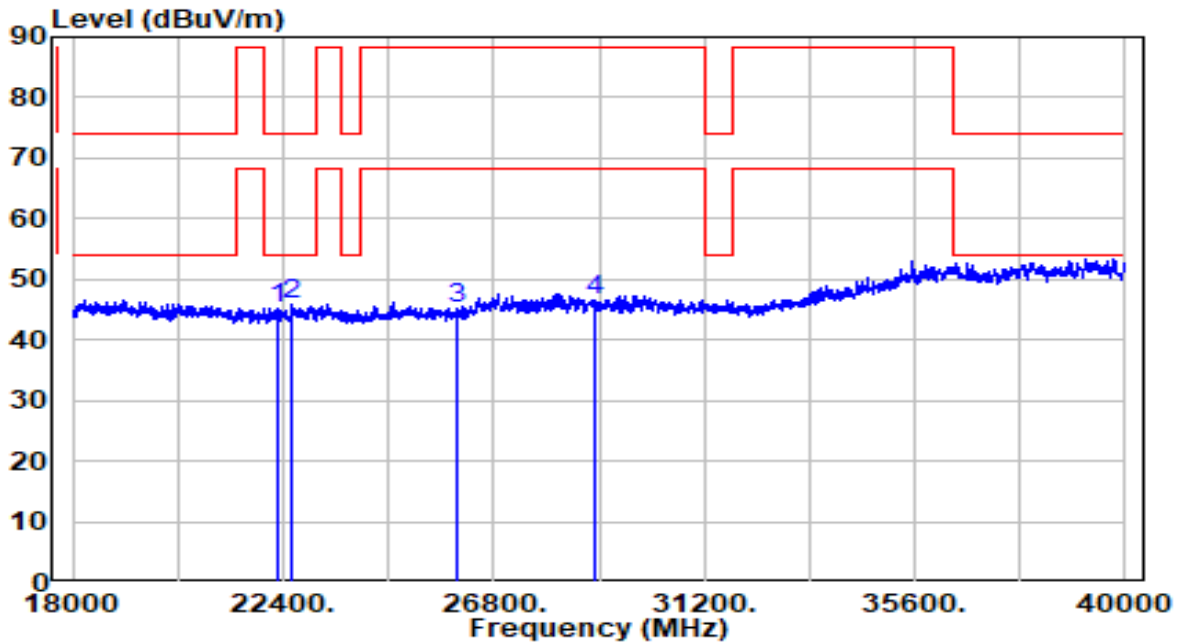


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	22290.000	52.72	-7.48	45.23	-28.77	74.00	Peak
2	* 22598.000	53.57	-7.72	45.85	-28.15	74.00	Peak
3	26030.000	51.66	-6.53	45.12	-43.08	88.20	Peak
4	28923.000	55.41	-8.77	46.64	-41.56	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**A.9 Radiated Restricted Band Edge Test Result**

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

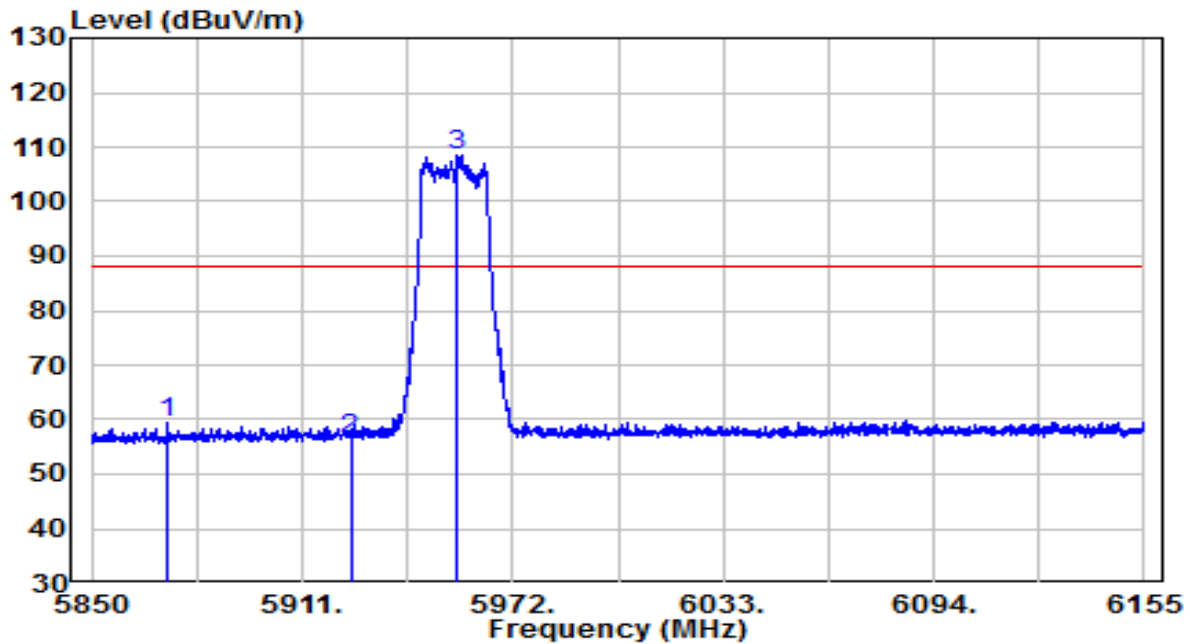


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5872.112	37.59	21.69	59.28	-28.92	88.20	Peak
2	5925.030	34.60	21.95	56.55	-31.65	88.20	Peak
3	* 5955.835	86.59	21.74	108.34	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

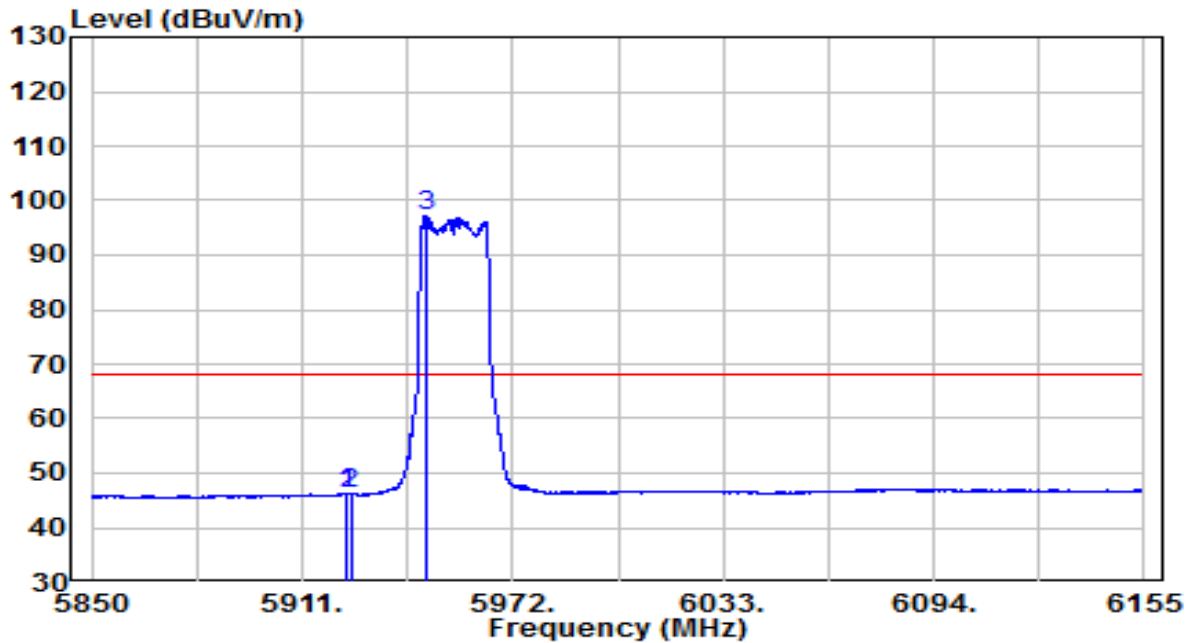


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5923.962	24.35	21.95	46.30	-21.90	68.20	Average
2	5925.030	24.10	21.95	46.05	-22.15	68.20	Average
3	* 5946.685	75.29	21.80	97.08	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

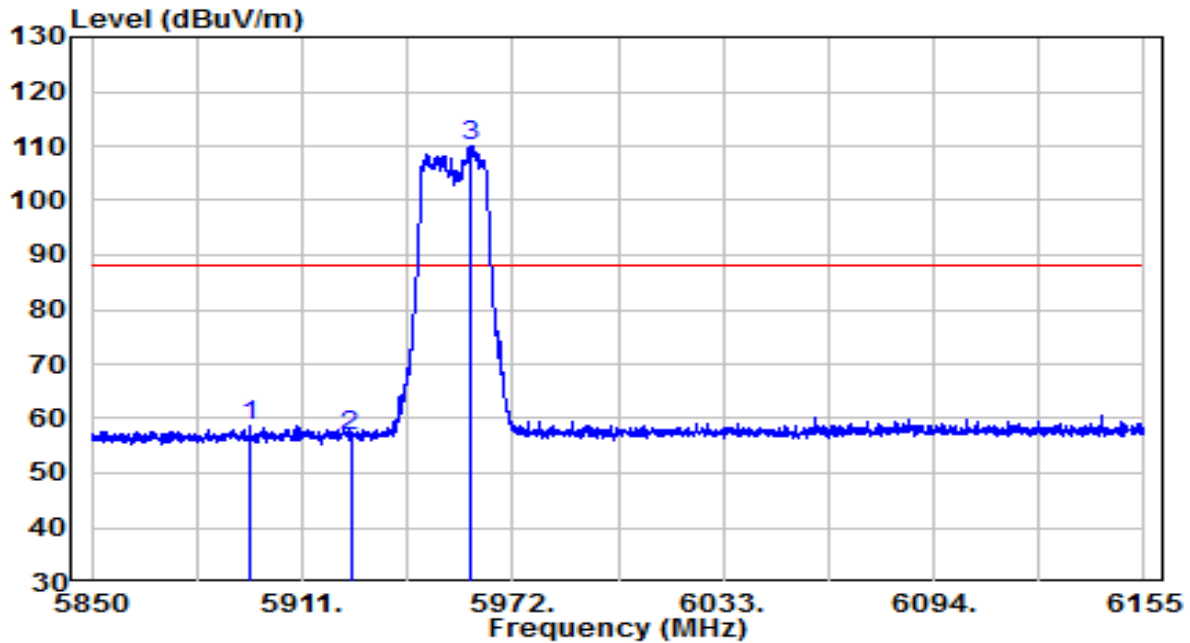


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5895.902	36.99	21.66	58.65	-29.55	88.20	Peak
2	5925.030	34.97	21.95	56.92	-31.28	88.20	Peak
3	* 5959.800	88.37	21.72	110.09	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

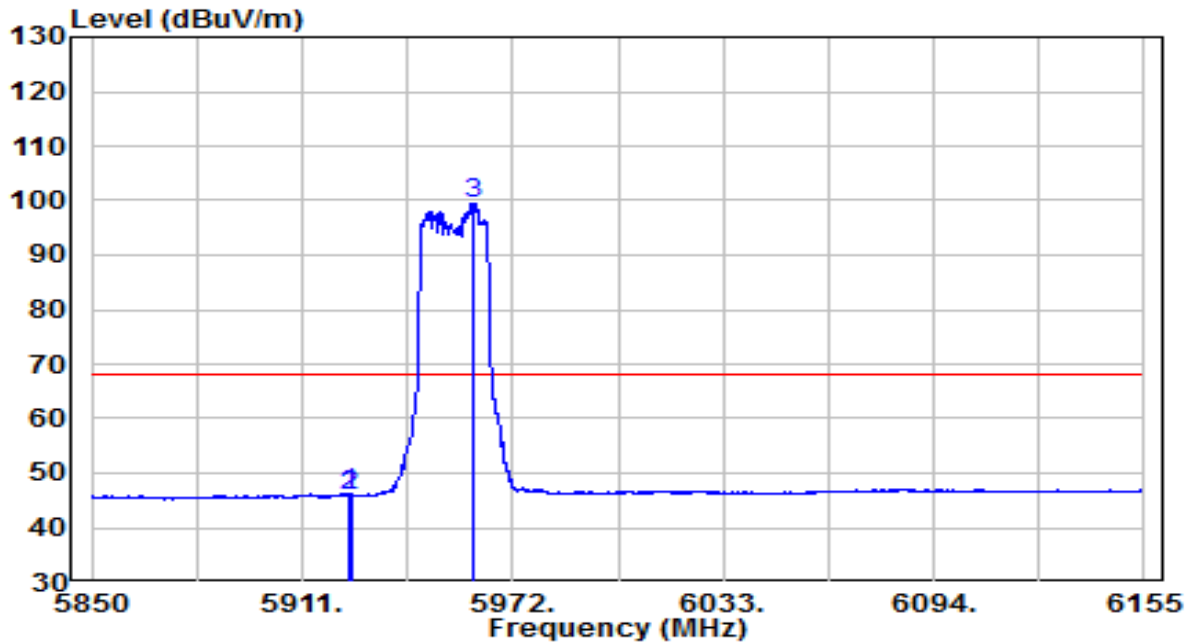


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5924.420	24.17	21.95	46.12	-22.08	68.20	Average
2	5925.030	24.03	21.95	45.98	-22.22	68.20	Average
3	* 5960.868	77.59	21.71	99.31	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

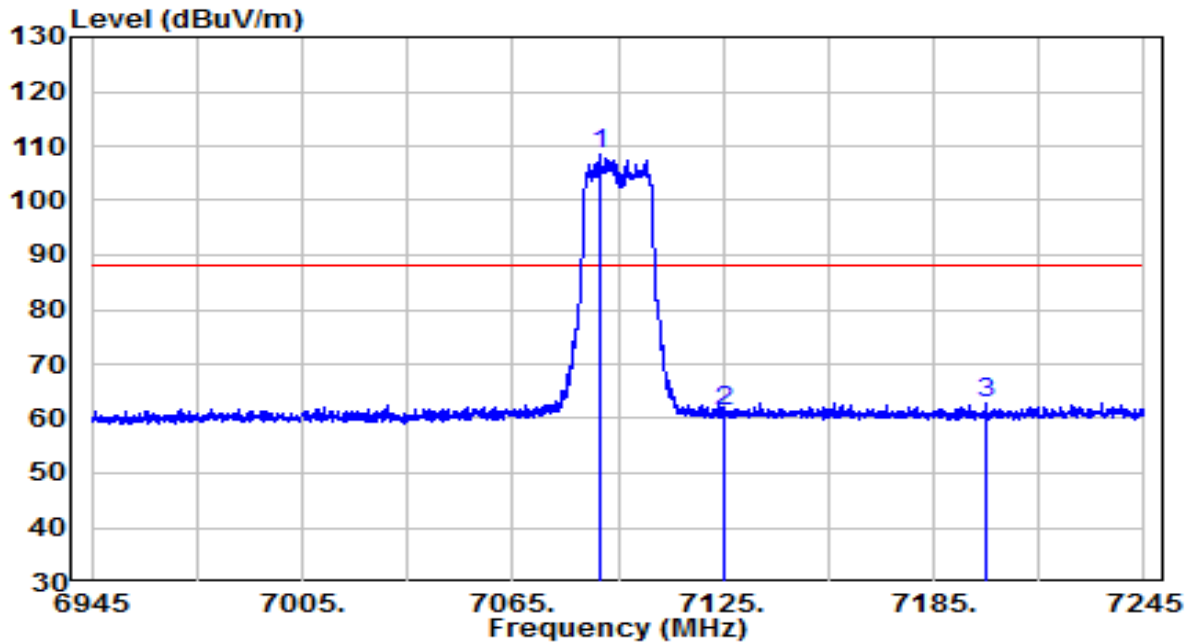


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7089.900	83.59	24.79	108.38	N/A	N/A	Peak
2	7125.000	36.70	24.79	61.49	-26.71	88.20	Peak
3	7199.700	37.76	25.04	62.80	-25.40	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

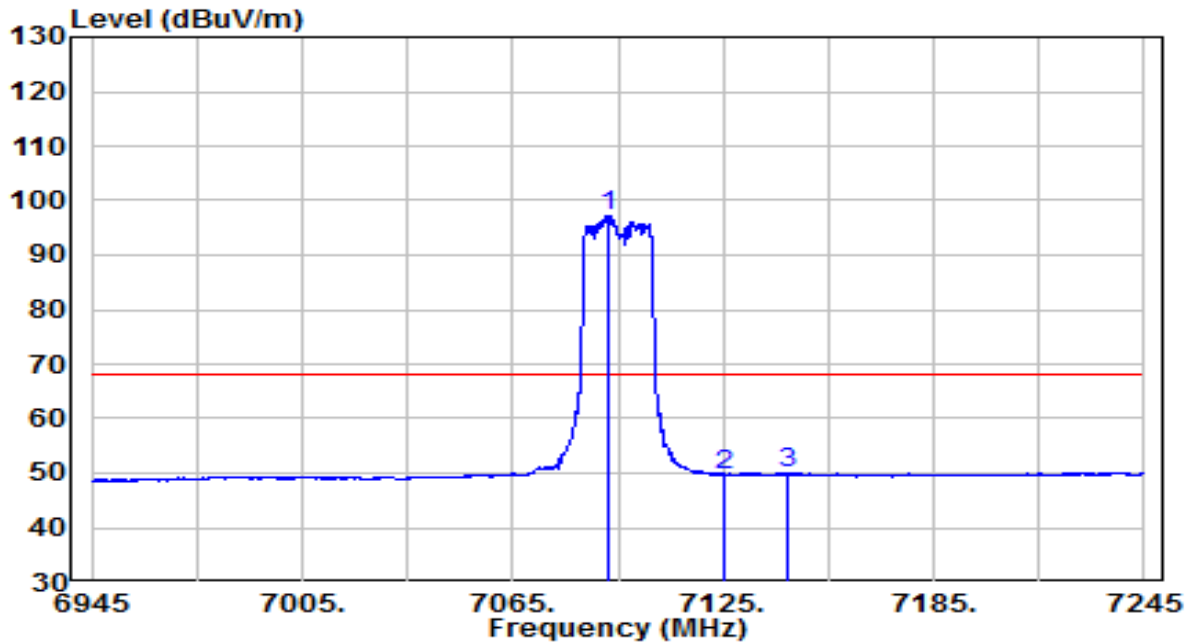


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7092.000	72.43	24.78	97.22	N/A	N/A	Average
2	7125.000	24.99	24.79	49.78	-18.42	68.20	Average
3	7143.000	25.06	25.00	50.07	-18.13	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

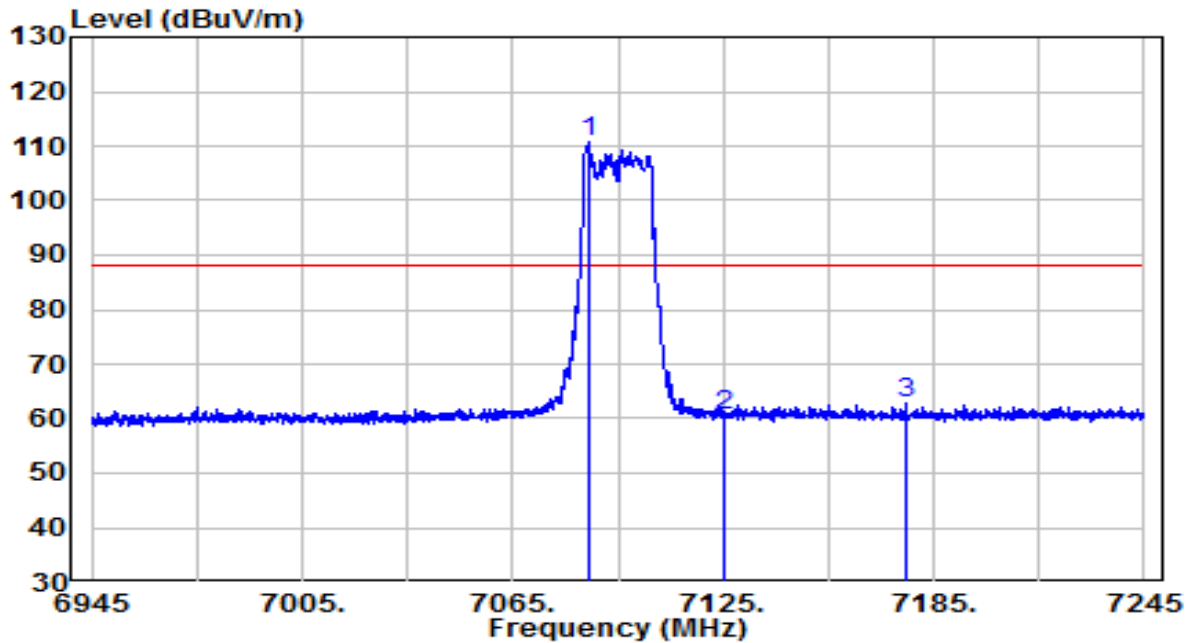


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7086.900	85.78	24.80	110.59	N/A	N/A	Peak
2	7125.000	35.62	24.79	60.41	-27.79	88.20	Peak
3	7177.350	37.62	25.04	62.65	-25.55	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

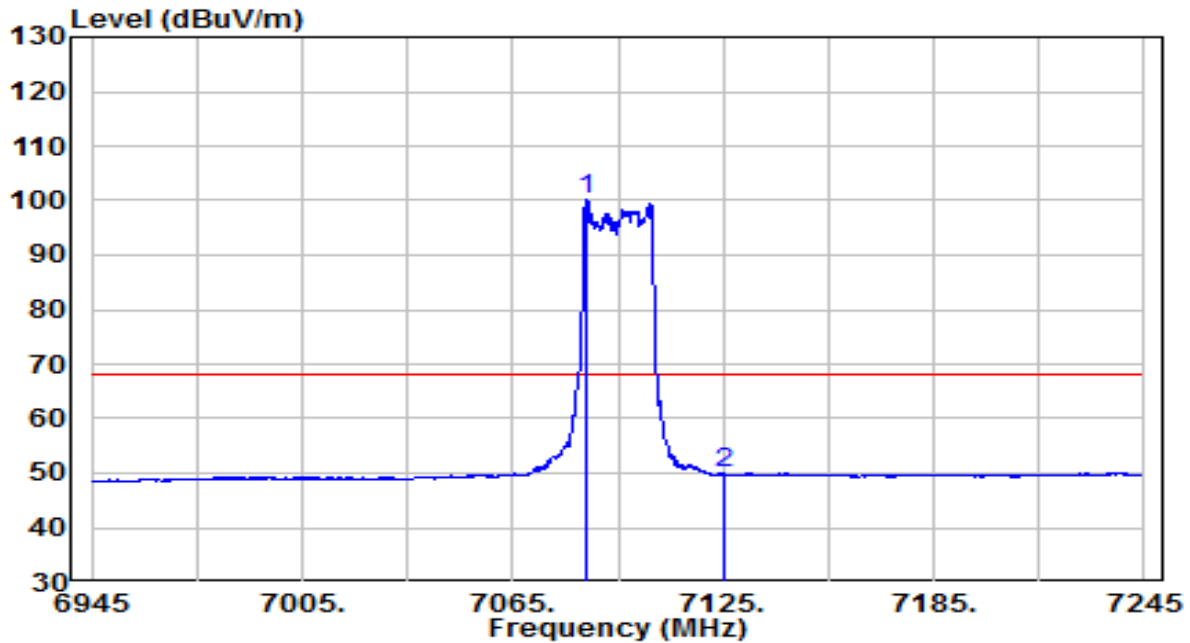


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7086.300	75.39	24.81	100.19	N/A	N/A	Average
2	7125.000	25.35	24.79	50.14	-18.06	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

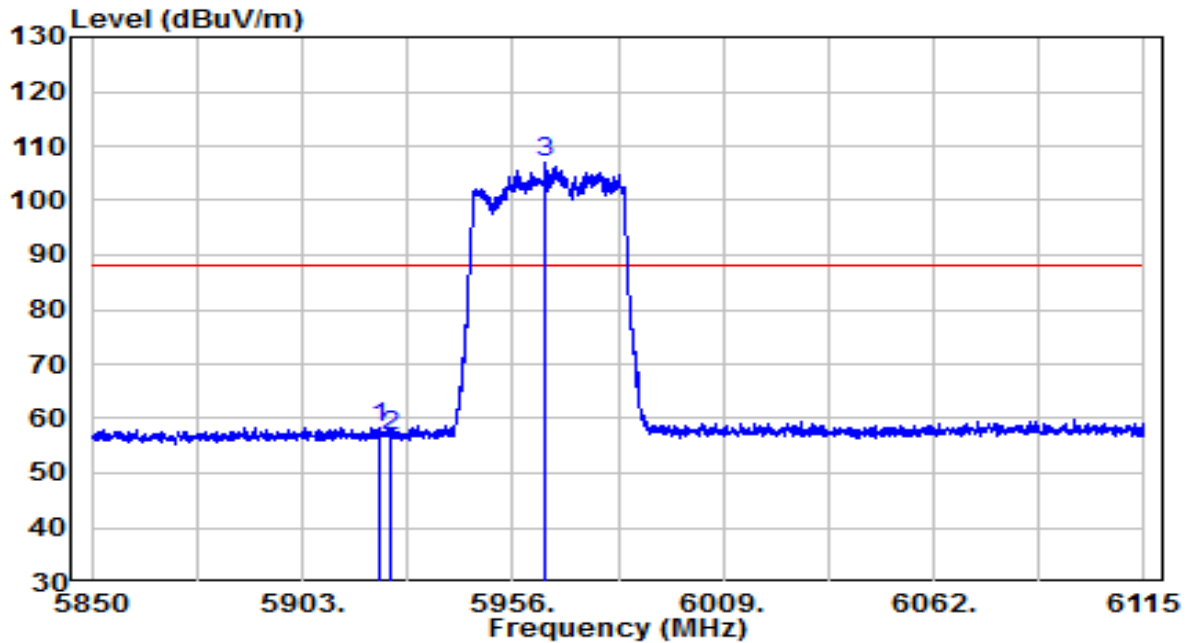


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5922.345	36.55	21.93	58.48	-29.72	88.20	Peak
2	5924.995	34.97	21.95	56.92	-31.28	88.20	Peak
3	* 5964.215	85.30	21.70	107.00	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

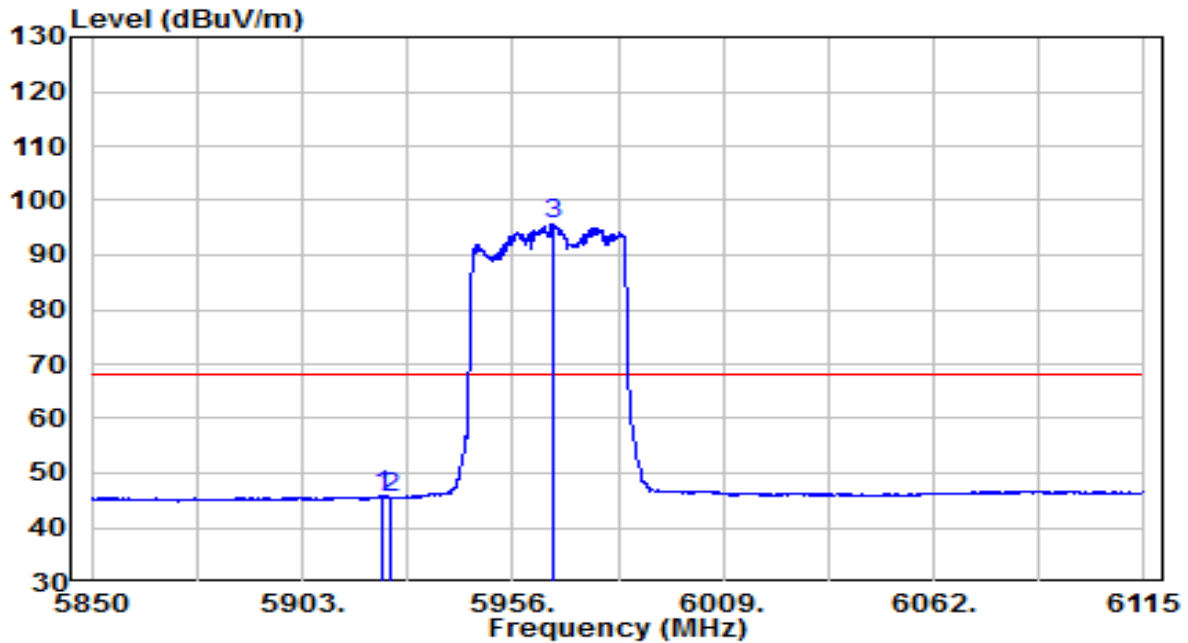


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5923.140	23.81	21.94	45.74	-22.46	68.20	Average
2	5924.995	23.58	21.95	45.53	-22.67	68.20	Average
3	* 5966.203	74.12	21.71	95.83	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

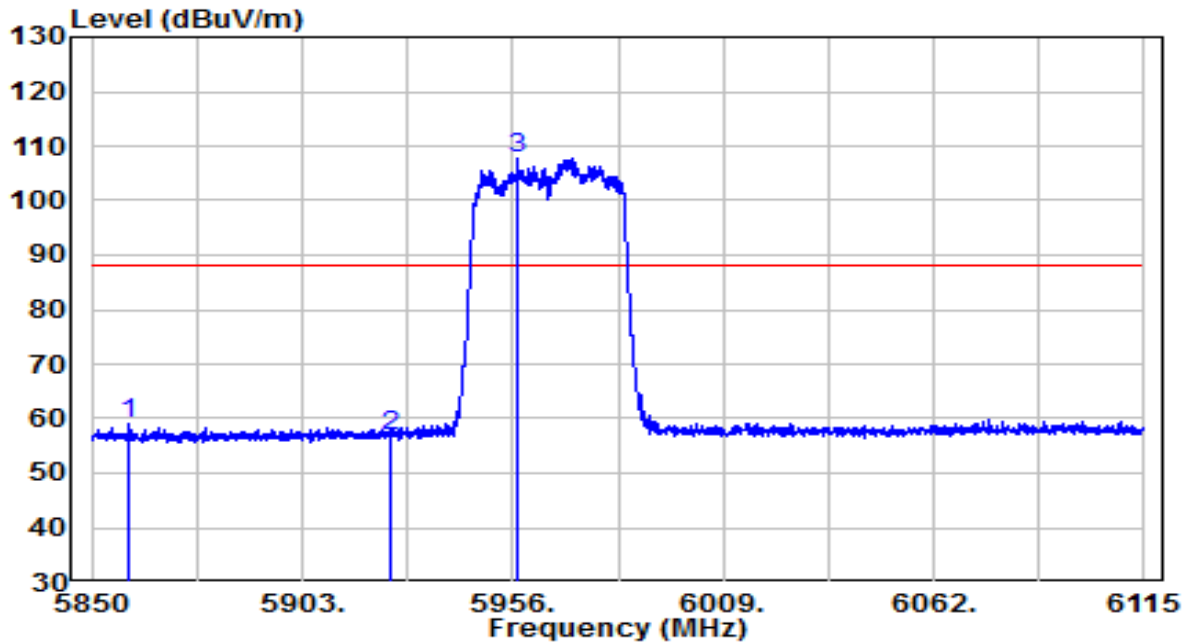


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5859.540	37.33	21.72	59.05	-29.15	88.20	Peak
2	5924.995	34.82	21.95	56.76	-31.44	88.20	Peak
3	* 5957.192	86.01	21.73	107.75	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

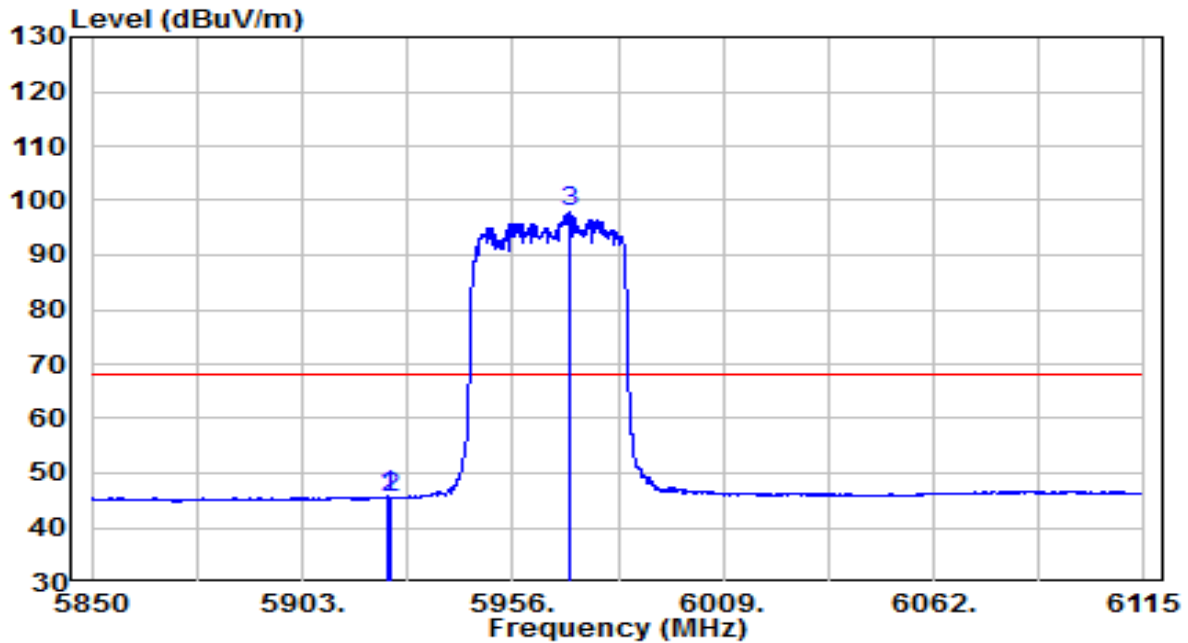


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5924.333	23.77	21.95	45.71	-22.49	68.20	Average
2	5925.000	23.64	21.95	45.59	-22.61	68.20	Average
3	* 5970.575	76.08	21.74	97.82	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

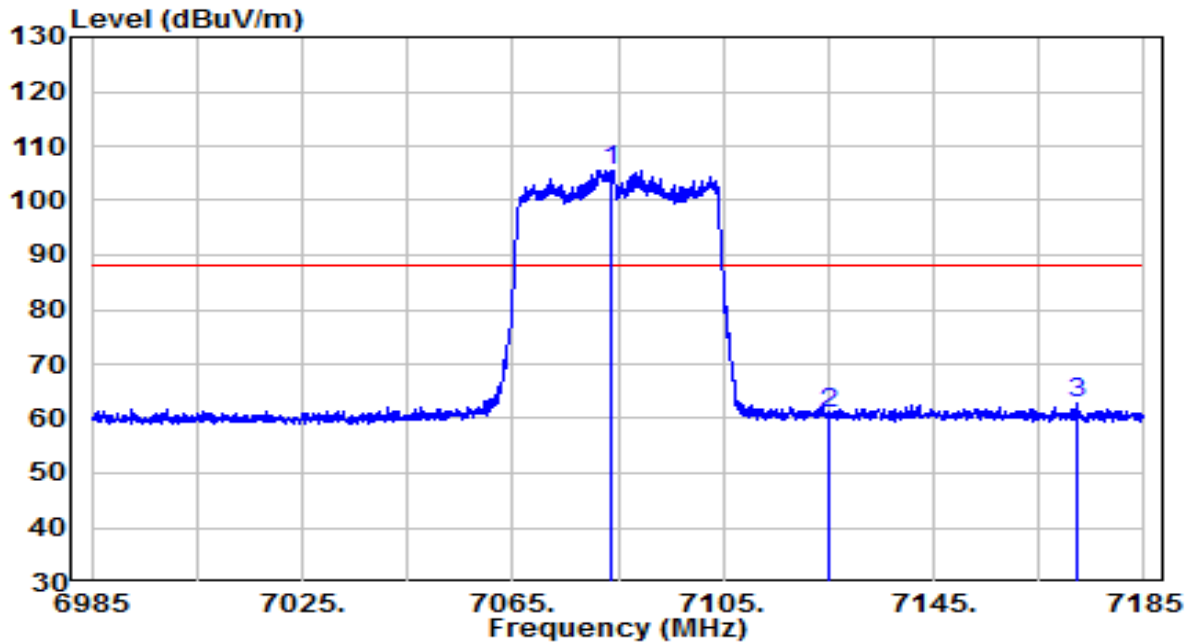


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7083.500	80.84	24.80	105.64	N/A	N/A	Peak
2	7125.000	36.10	24.79	60.89	-27.31	88.20	Peak
3	7172.000	37.88	25.04	62.92	-25.28	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

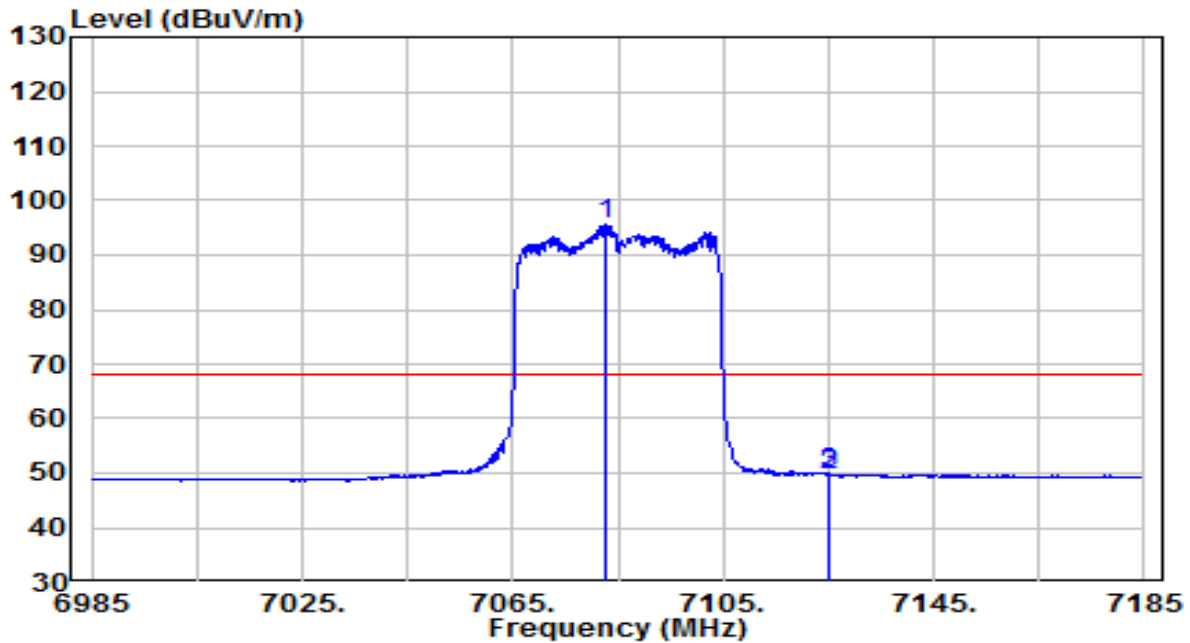


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7082.700	70.85	24.80	95.65	N/A	N/A	Average
2	7125.000	25.01	24.79	49.80	-18.40	68.20	Average
3	7125.200	25.26	24.79	50.05	-18.15	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

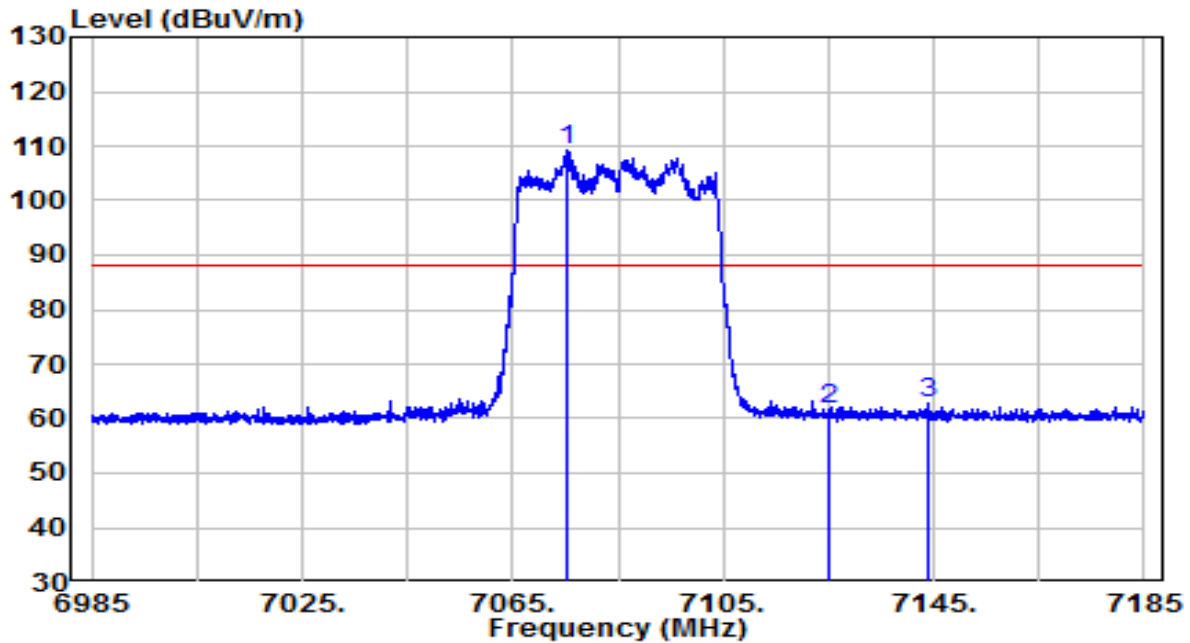


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7075.400	84.50	24.78	109.27	N/A	N/A	Peak
2	7125.000	37.05	24.79	61.83	-26.37	88.20	Peak
3	7144.100	37.69	25.01	62.70	-25.50	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

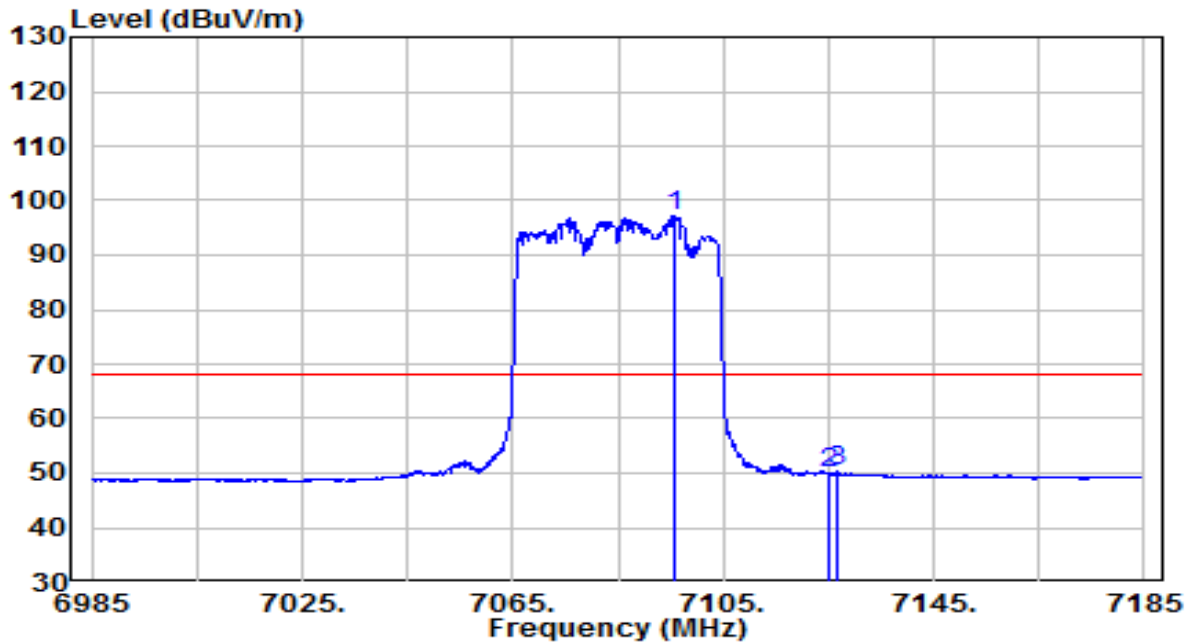


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7095.700	72.49	24.75	97.24	N/A	N/A	Average
2	7125.000	25.19	24.79	49.98	-18.22	68.20	Average
3	7126.900	25.40	24.81	50.21	-17.99	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

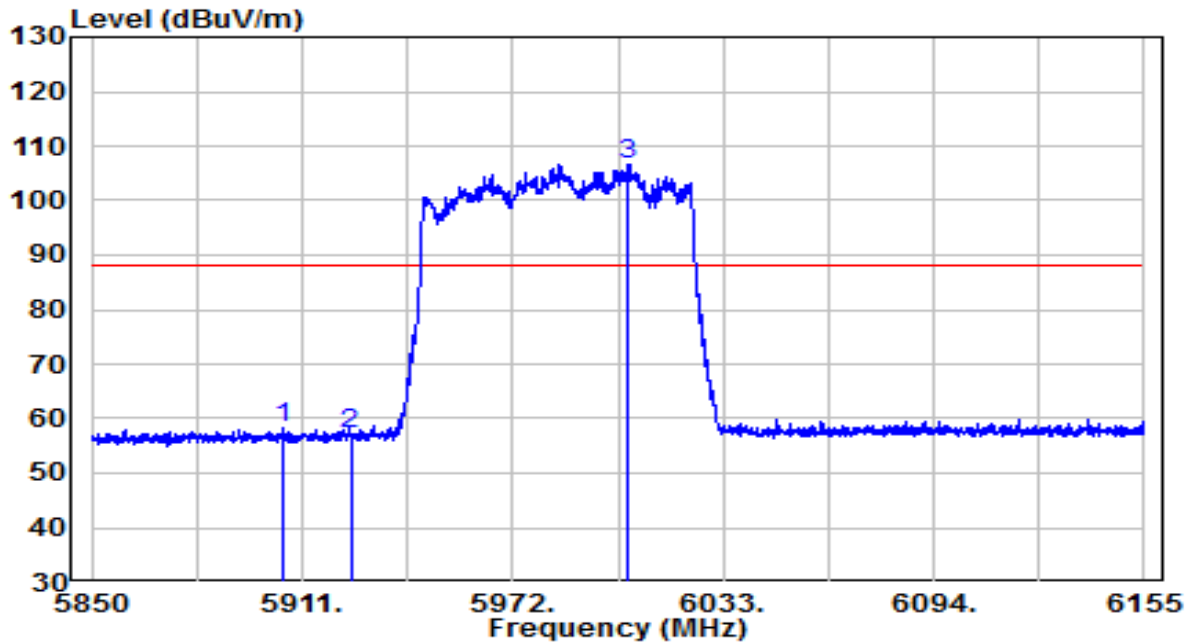


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5905.815	36.71	21.73	58.44	-29.76	88.20	Peak
2	5925.000	35.04	21.95	56.99	-31.21	88.20	Peak
3	* 6005.245	84.82	21.87	106.69	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

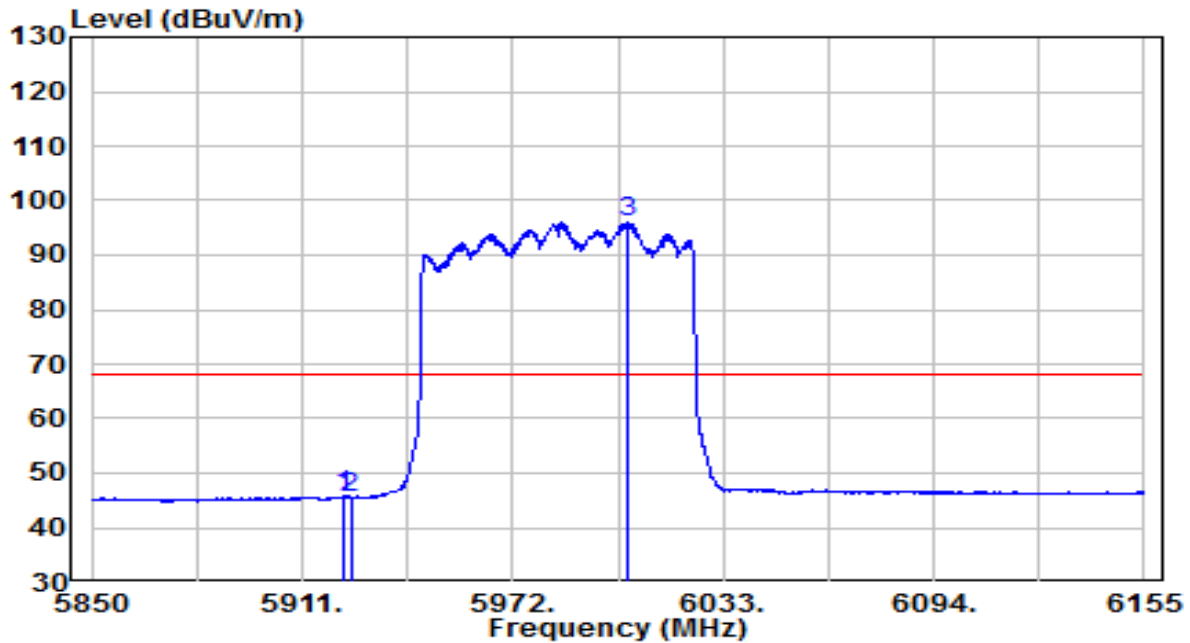


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5922.895	23.79	21.94	45.72	-22.48	68.20	Average
2	5925.030	23.66	21.95	45.61	-22.59	68.20	Average
3	* 6005.092	74.09	21.87	95.96	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

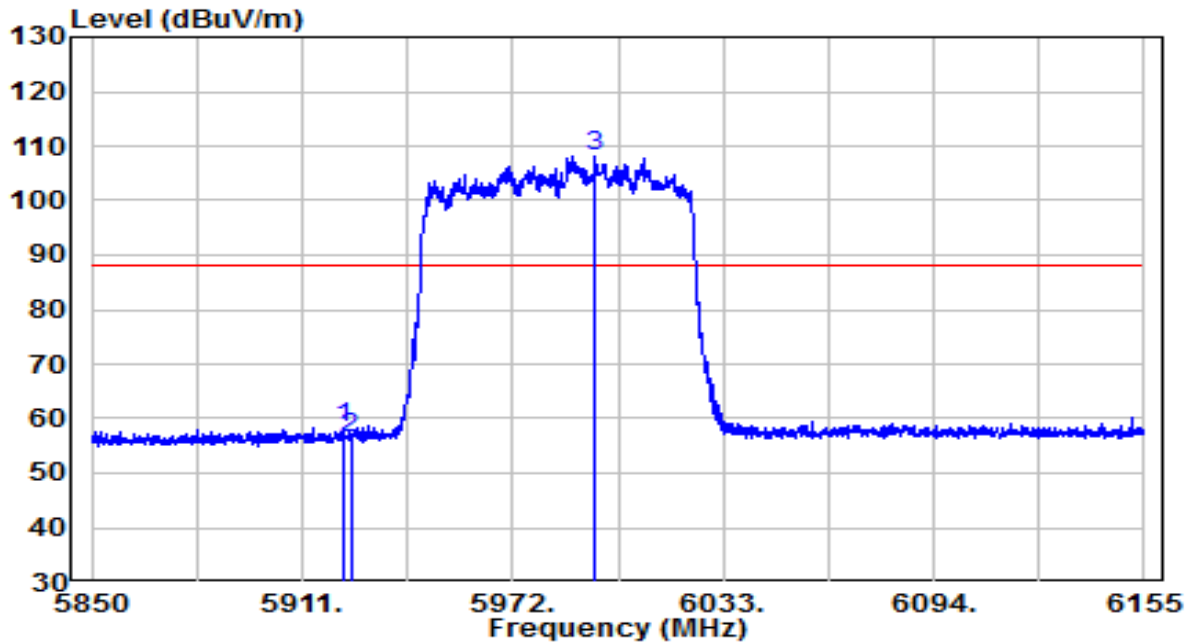


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5923.047	36.52	21.94	58.46	-29.74	88.20	Peak
2	5925.030	34.38	21.95	56.33	-31.87	88.20	Peak
3	* 5995.790	86.38	21.81	108.19	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

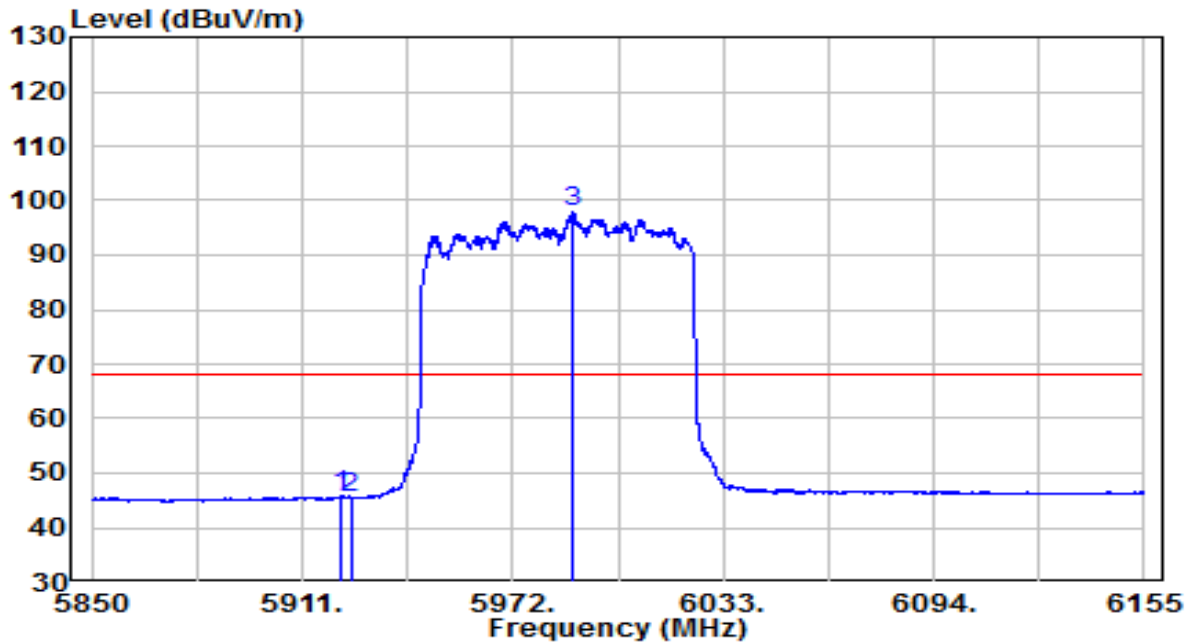


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5922.590	23.78	21.93	45.71	-22.49	68.20	Average
2	5925.000	23.56	21.95	45.51	-22.69	68.20	Average
3	* 5989.385	75.99	21.79	97.78	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

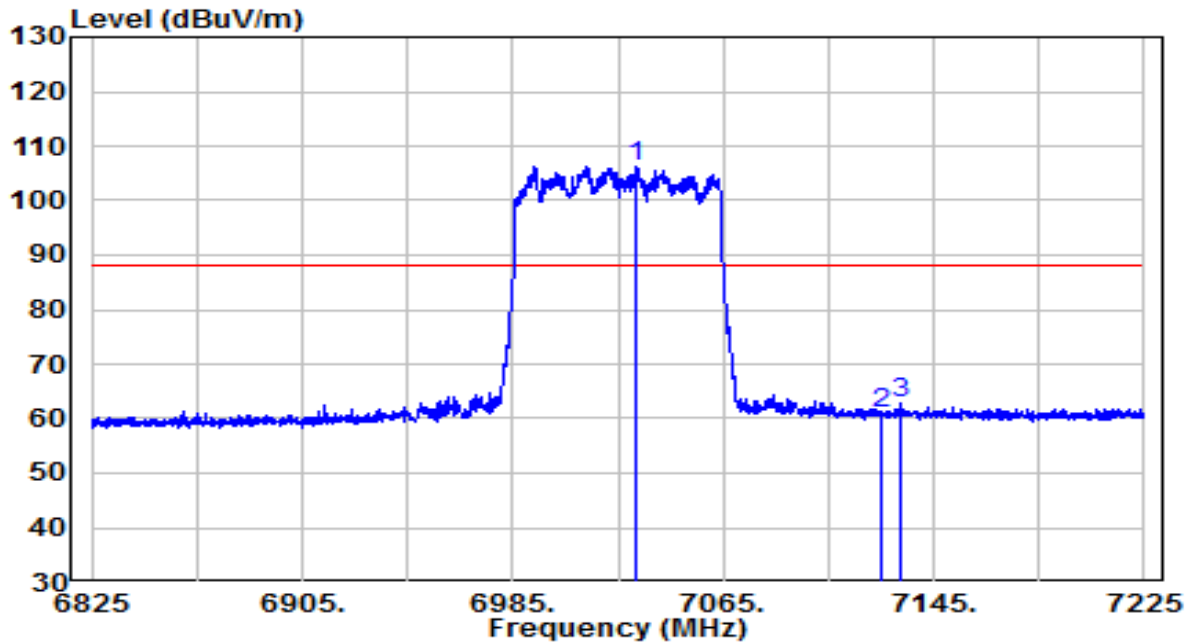


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7032.200	81.96	24.36	106.32	N/A	N/A	Peak
2	7125.000	36.04	24.79	60.82	-27.38	88.20	Peak
3	7132.200	37.91	24.89	62.80	-25.40	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

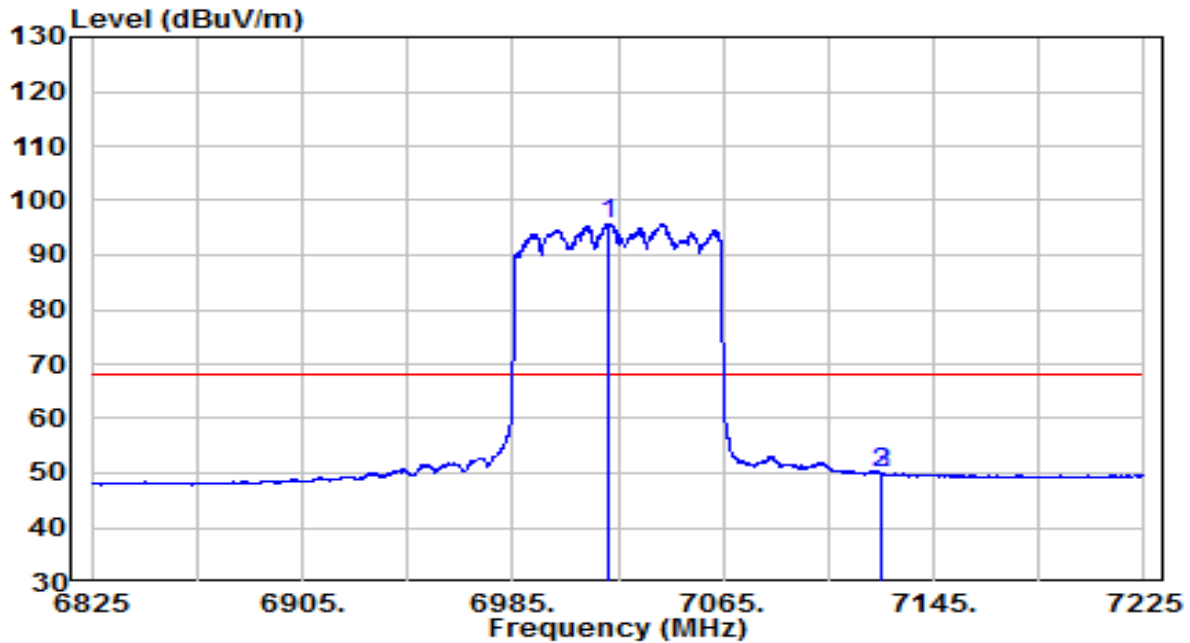


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7021.400	71.42	24.33	95.75	N/A	N/A	Average
2	7125.000	25.21	24.79	50.00	-18.20	68.20	Average
3	7125.400	25.24	24.79	50.04	-18.16	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

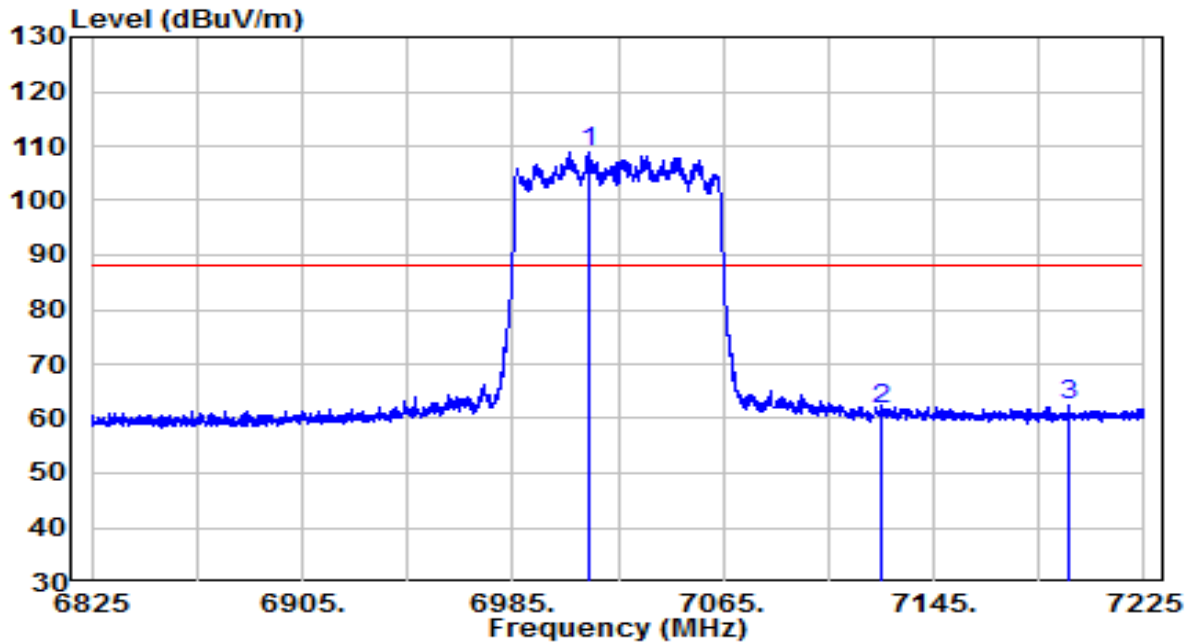


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7014.400	84.56	24.34	108.90	N/A	N/A	Peak
2	7125.000	36.98	24.79	61.77	-26.43	88.20	Peak
3	7196.800	37.43	25.03	62.46	-25.74	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

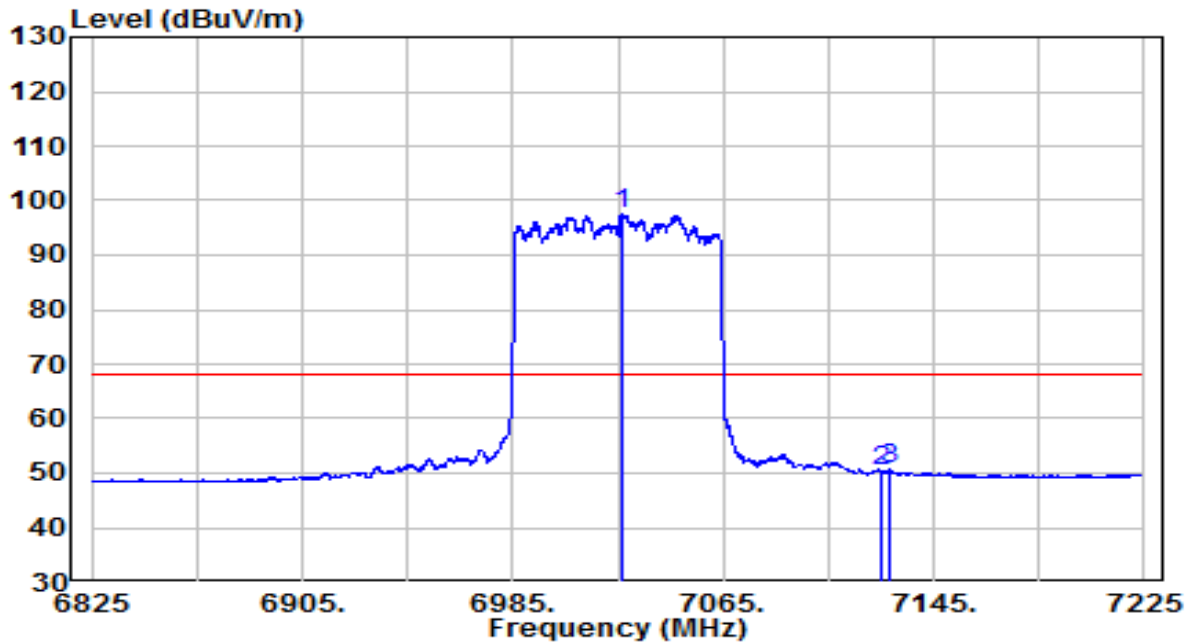


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7027.000	73.22	24.35	97.57	N/A	N/A	Average
2	7125.000	25.48	24.79	50.27	-17.93	68.20	Average
3	7127.800	25.77	24.83	50.59	-17.61	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>ss</sub> =1	Test Voltage	120V/60Hz

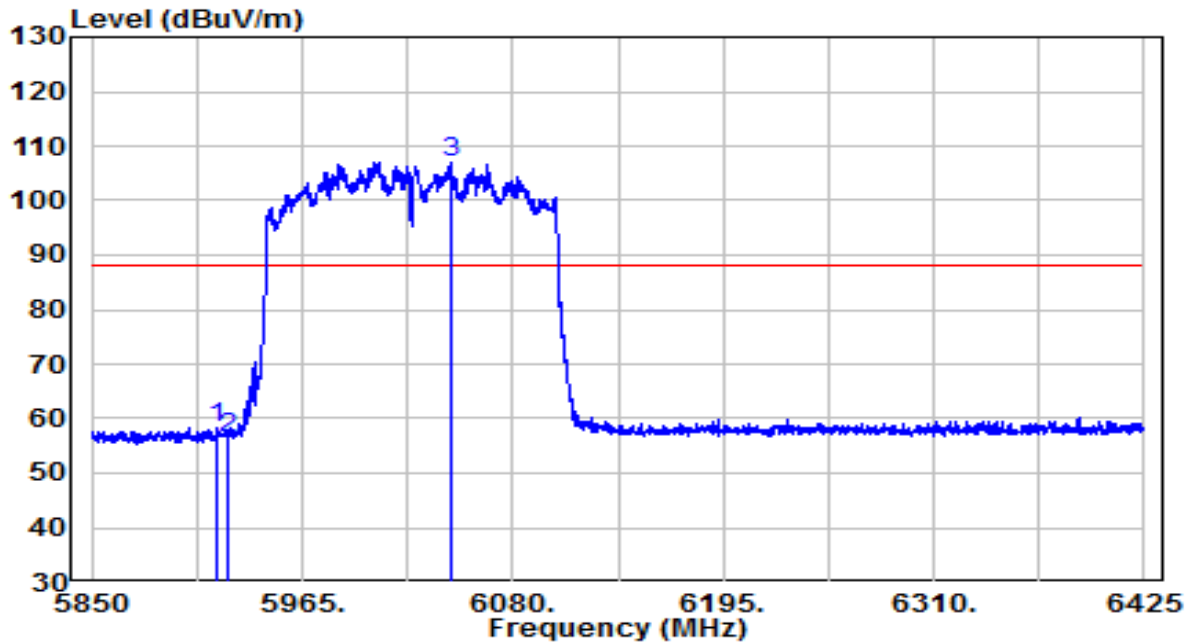


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5918.138	36.44	21.88	58.32	-29.88	88.20	Peak
2	5925.038	34.28	21.95	56.23	-31.97	88.20	Peak
3	* 6046.650	85.40	21.61	107.01	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

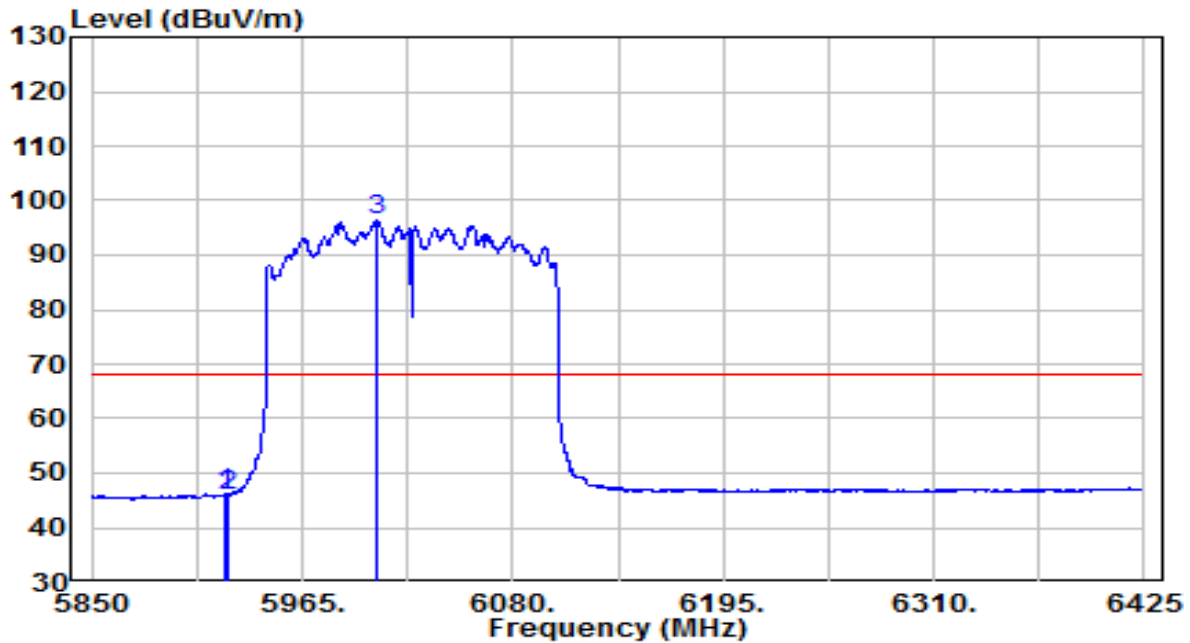


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5922.737	24.18	21.93	46.11	-22.09	68.20	Average
2	5925.038	24.08	21.95	46.03	-22.17	68.20	Average
3	* 6005.825	74.40	21.87	96.27	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

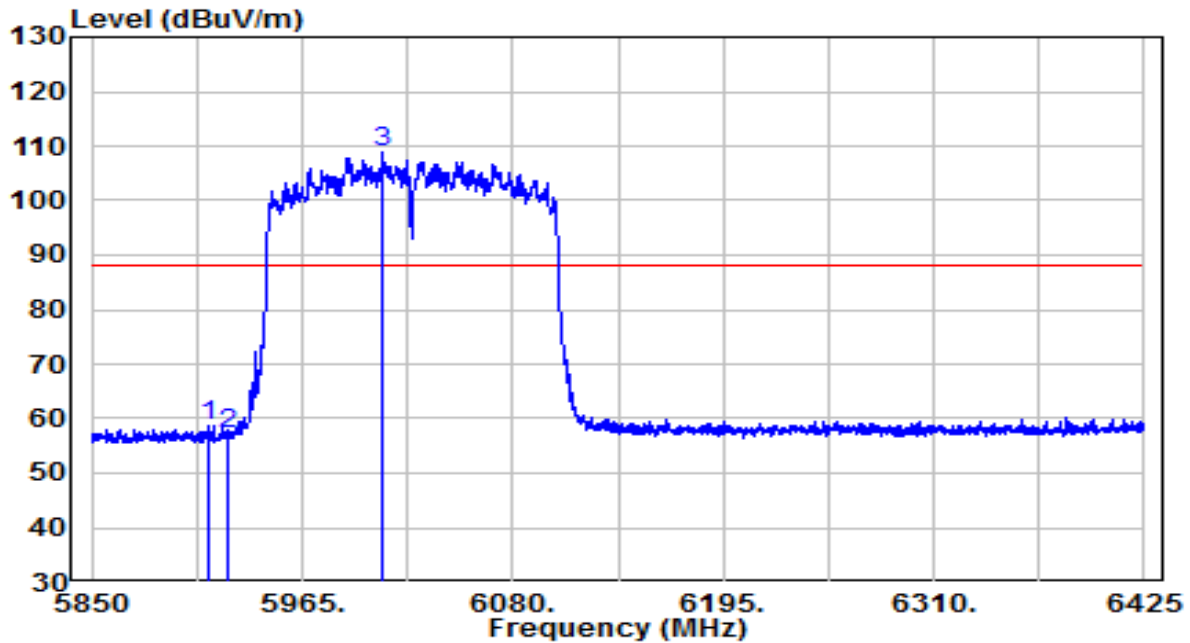


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5914.400	37.00	21.84	58.85	-29.35	88.20	Peak
2	5925.038	35.21	21.95	57.16	-31.04	88.20	Peak
3	* 6008.700	86.80	21.89	108.68	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

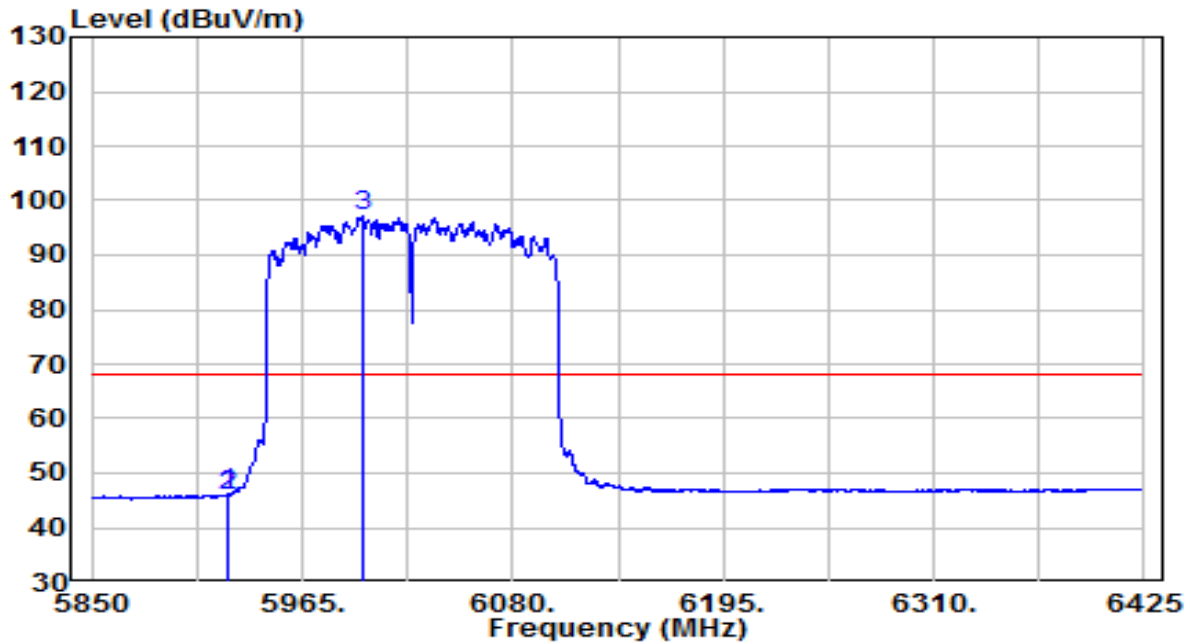


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5924.462	24.13	21.95	46.08	-22.12	68.20	Average
2	5925.038	24.08	21.95	46.02	-22.18	68.20	Average
3	* 5997.775	75.35	21.83	97.18	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

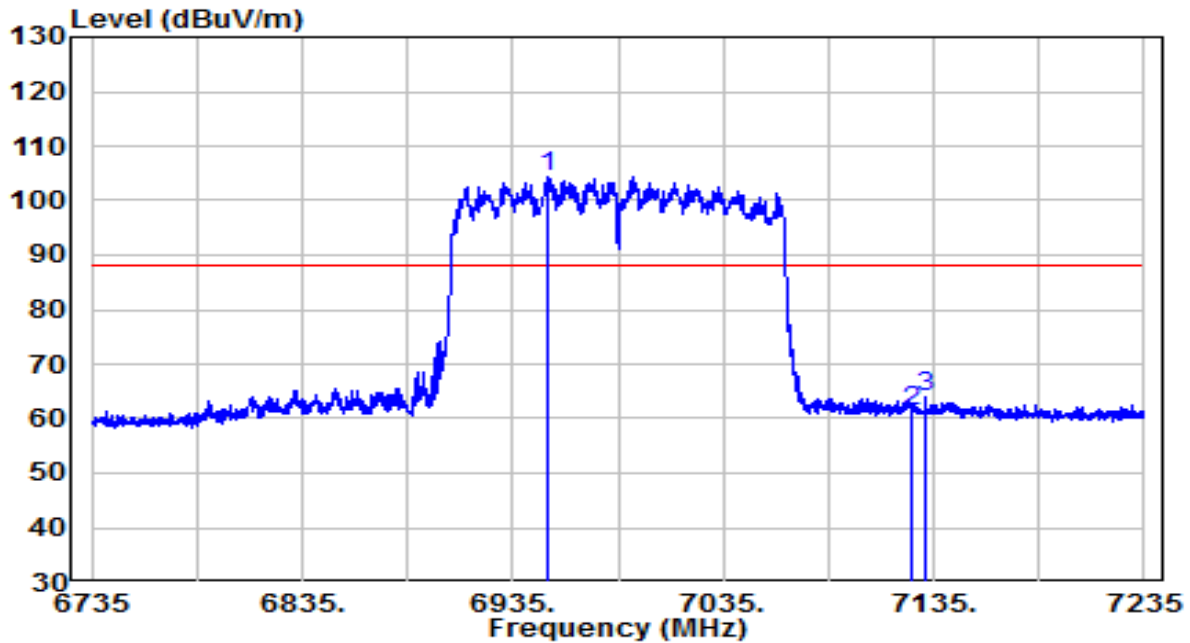


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 6951.250	80.46	24.06	104.52	N/A	N/A	Peak
2	7125.000	36.70	24.79	61.48	-26.72	88.20	Peak
3	7130.750	38.99	24.87	63.86	-24.34	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

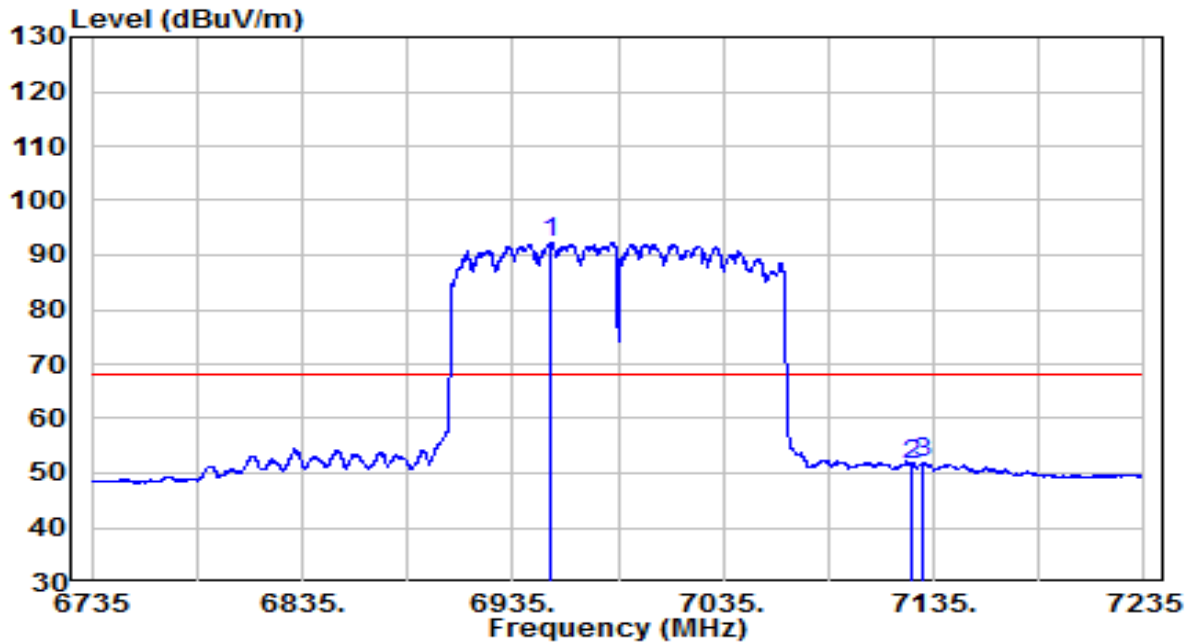


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 6953.500	68.31	24.08	92.39	N/A	N/A	Average
2	7125.000	26.86	24.79	51.65	-16.55	68.20	Average
3	7129.500	26.96	24.85	51.81	-16.39	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

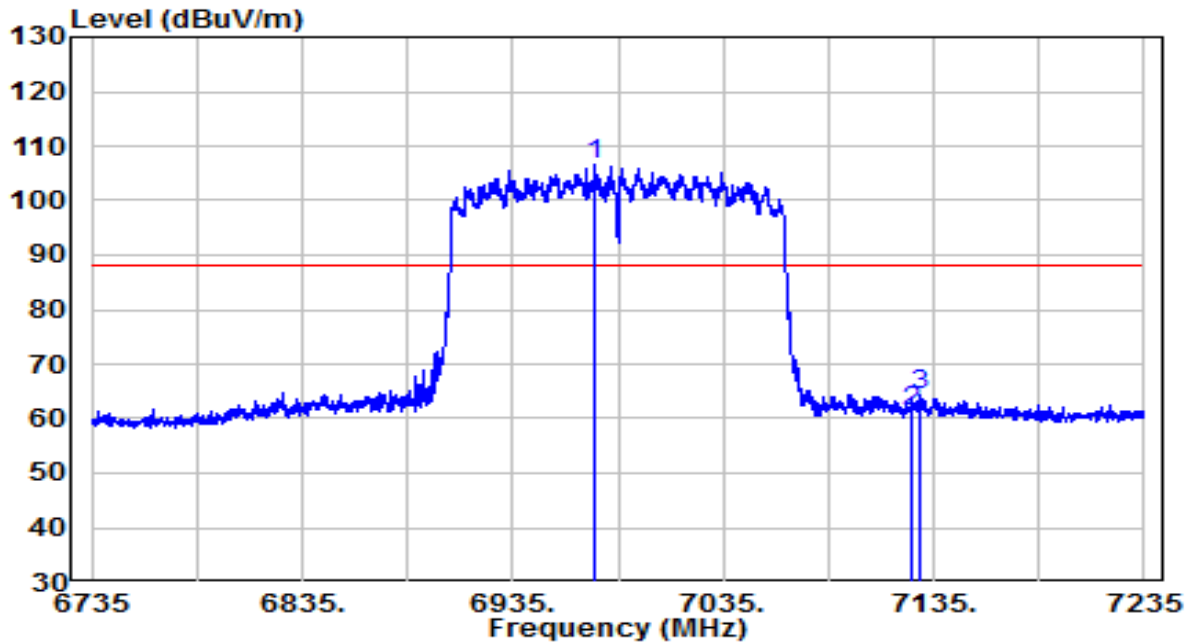


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 6974.250	82.23	24.26	106.48	N/A	N/A	Peak
2	7125.000	36.61	24.79	61.39	-26.81	88.20	Peak
3	7128.500	39.63	24.84	64.46	-23.74	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =1	Test Voltage	120V/60Hz

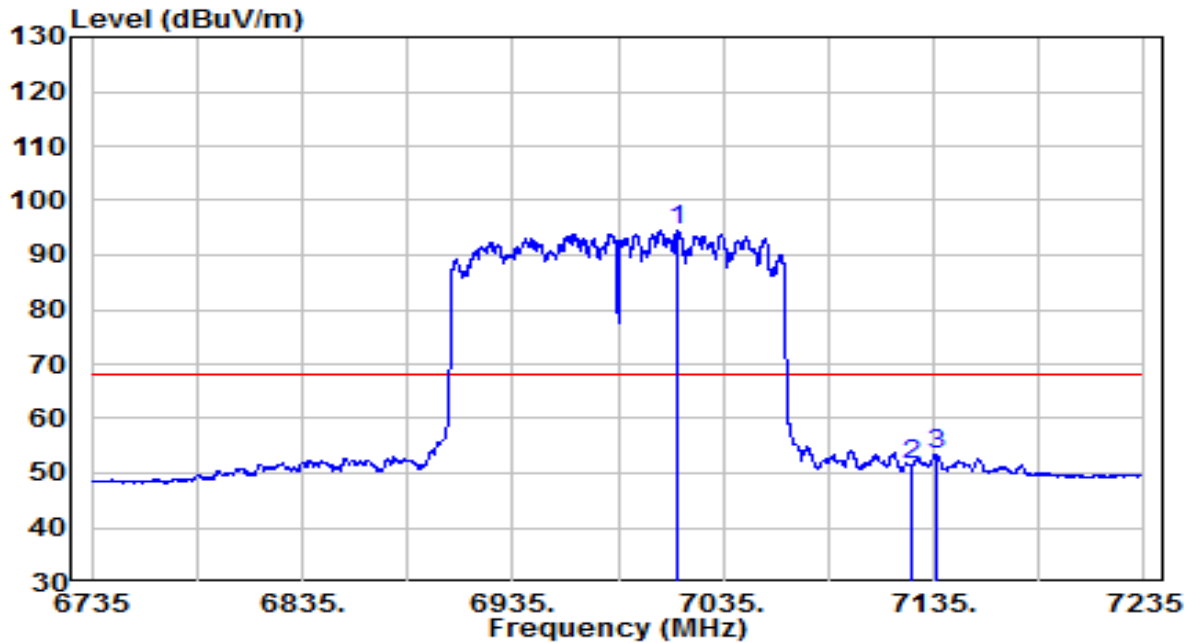


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7013.750	70.18	24.34	94.52	N/A	N/A	Average
2	7125.000	26.81	24.79	51.60	-16.60	68.20	Average
3	7136.250	28.59	24.94	53.53	-14.67	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

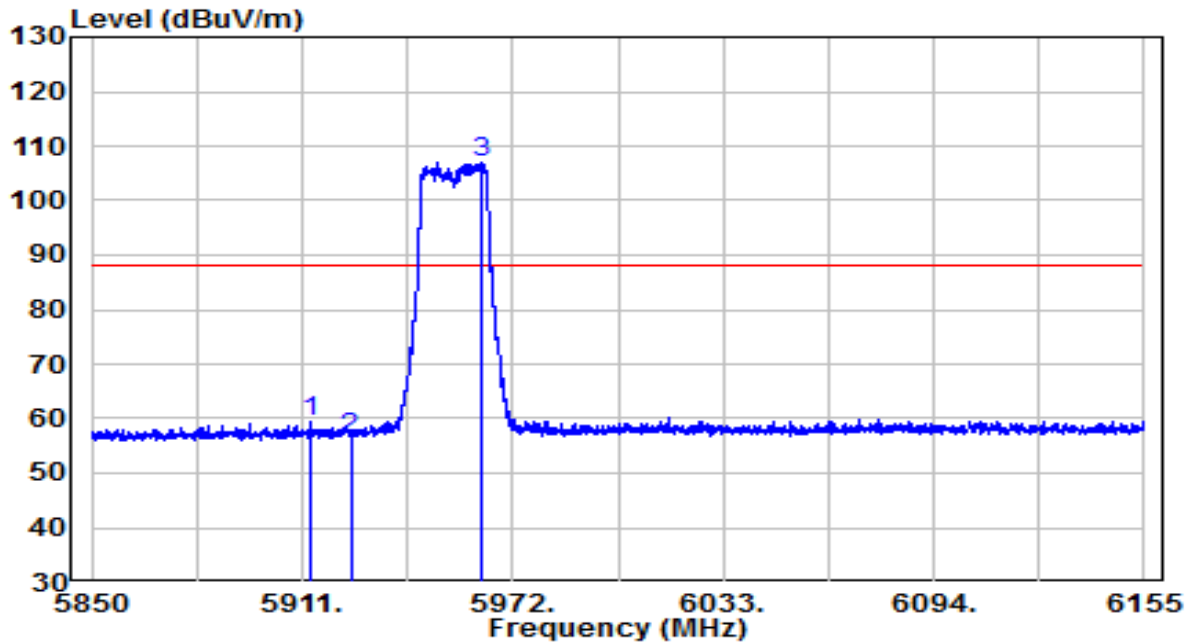


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5913.440	37.44	21.83	59.28	-28.92	88.20	Peak
2	5925.030	34.44	21.95	56.39	-31.81	88.20	Peak
3	* 5972.002	85.36	21.70	107.06	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

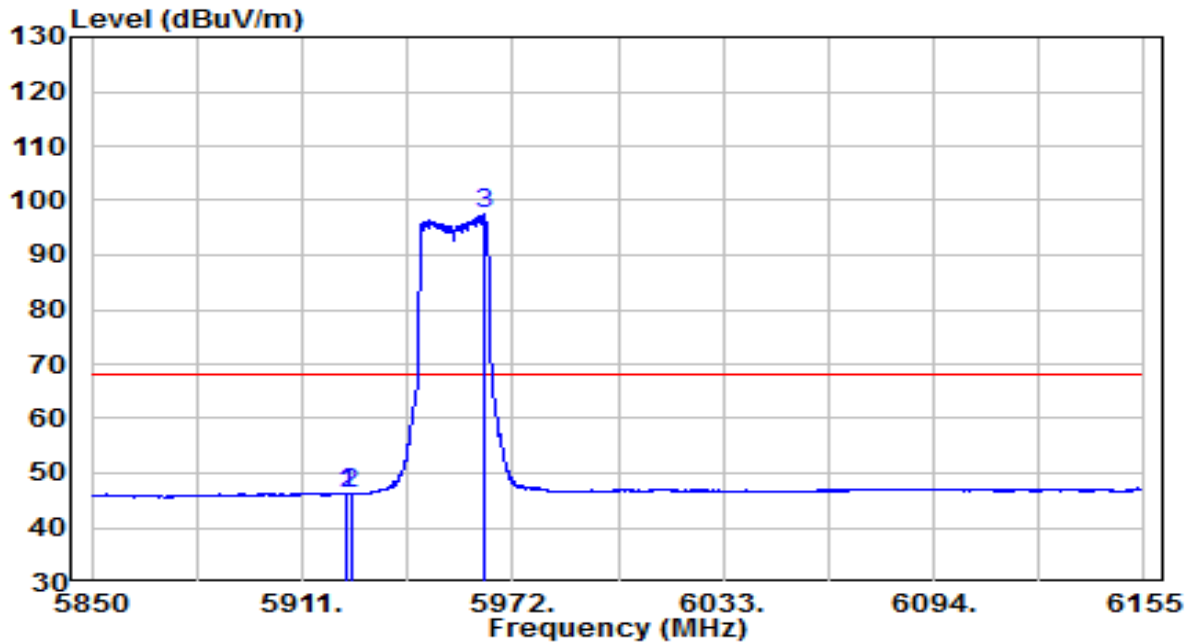


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5923.962	24.45	21.95	46.40	-21.80	68.20	Average
2	5925.030	24.38	21.95	46.32	-21.88	68.20	Average
3	* 5963.612	75.71	21.70	97.41	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

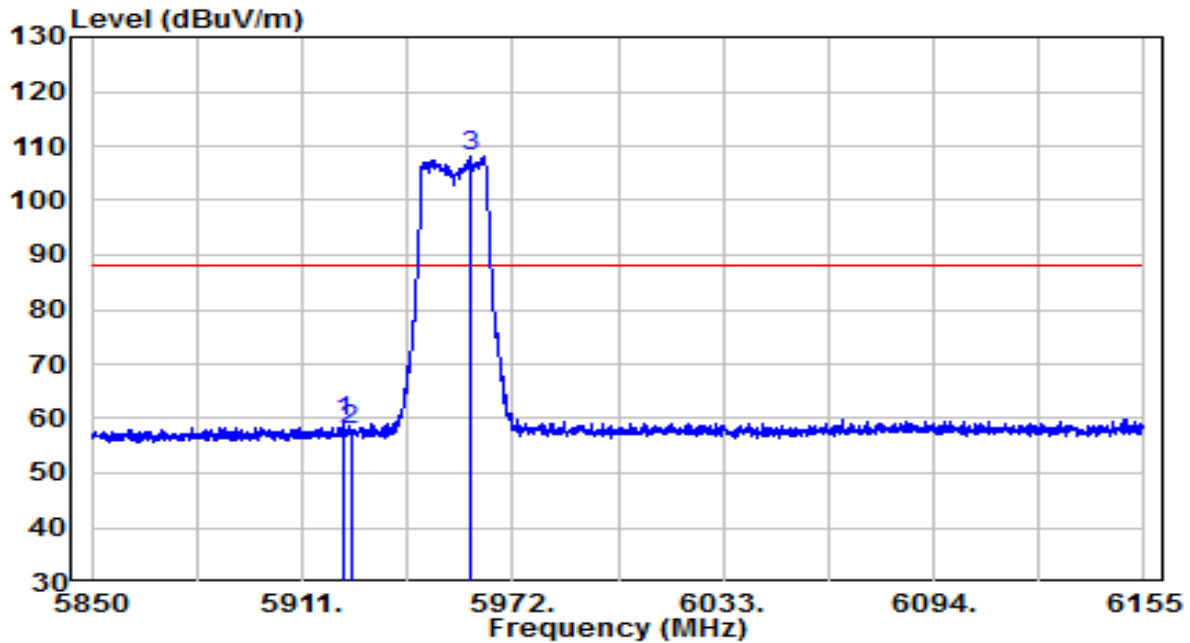


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5923.047	37.37	21.94	59.31	-28.89	88.20	Peak
2	5925.030	36.10	21.95	58.04	-30.16	88.20	Peak
3	* 5960.105	86.31	21.72	108.03	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

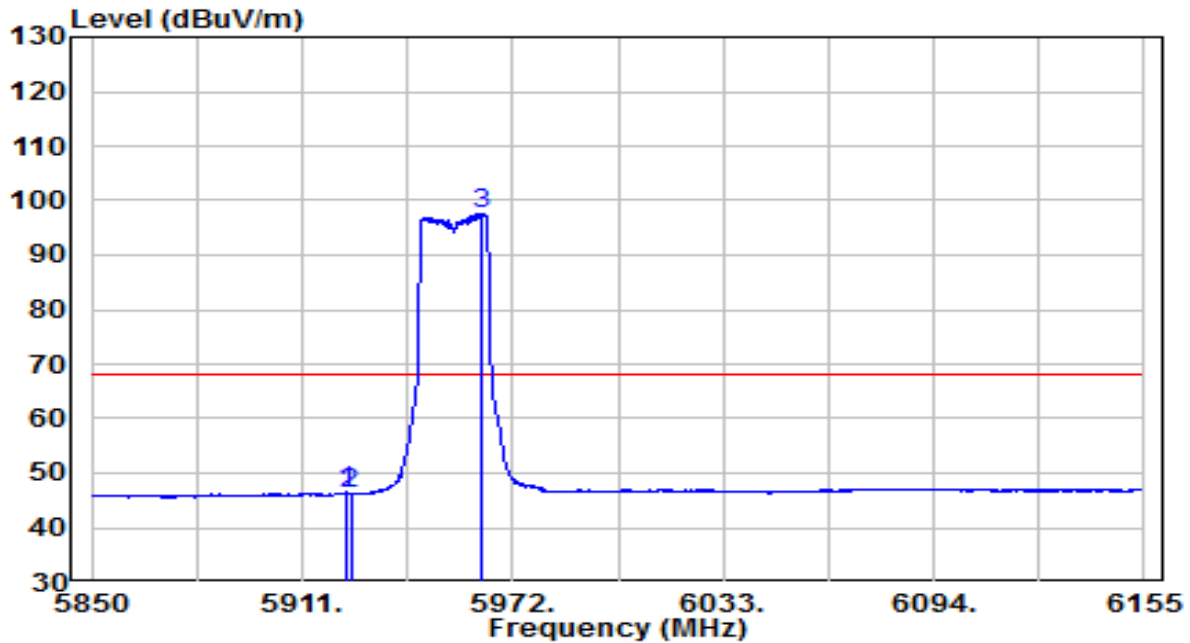


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5924.115	24.47	21.95	46.42	-21.78	68.20	Average
2	5925.030	24.35	21.95	46.30	-21.90	68.20	Average
3	* 5963.155	75.97	21.70	97.67	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

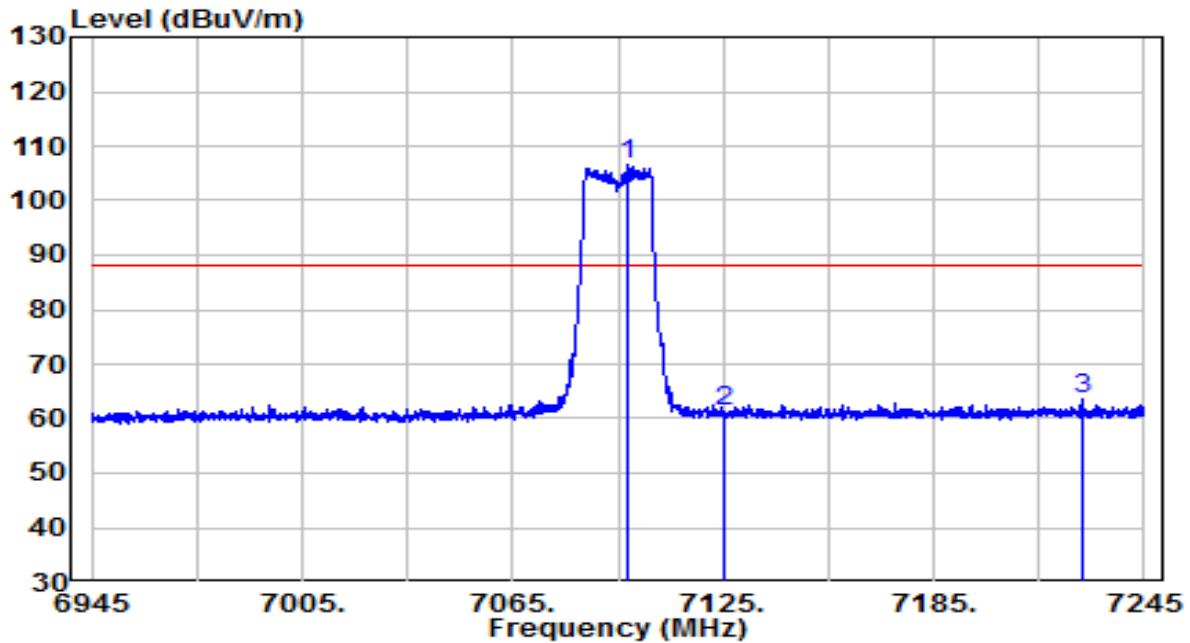


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	81.68	24.74	106.42	N/A	N/A	Peak
2		36.50	24.79	61.29	-26.91	88.20	Peak
3		38.42	25.15	63.57	-24.63	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

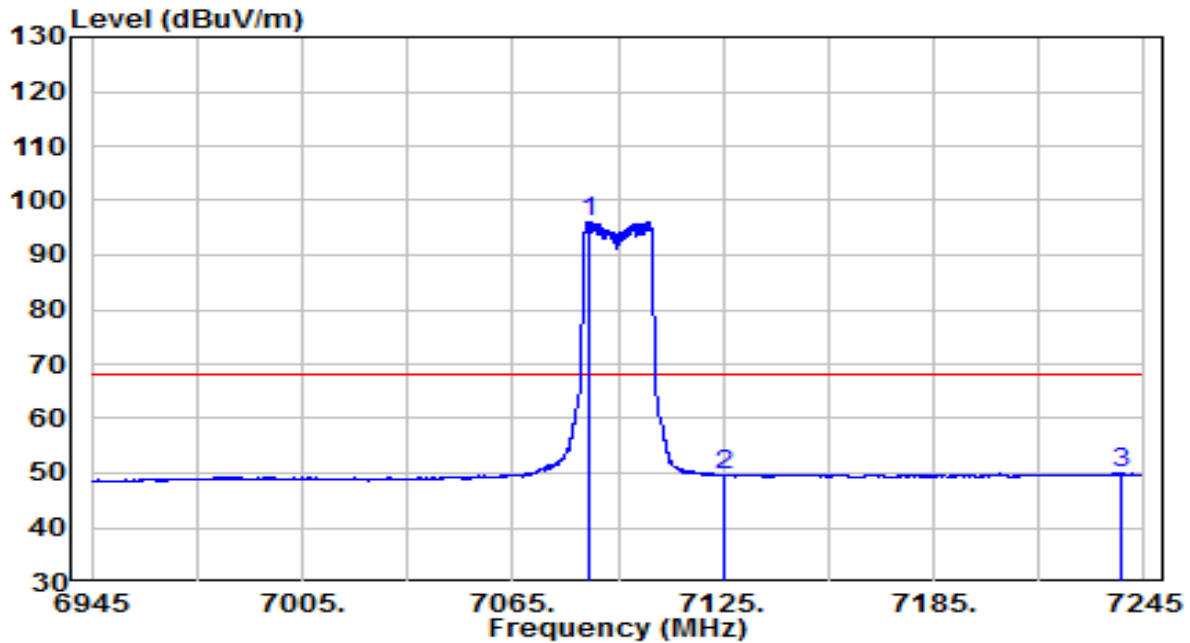


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7086.600	71.25	24.80	96.05	N/A	N/A	Average
2	7125.000	24.80	24.79	49.59	-18.61	68.20	Average
3	7238.100	24.62	25.27	49.89	-18.31	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

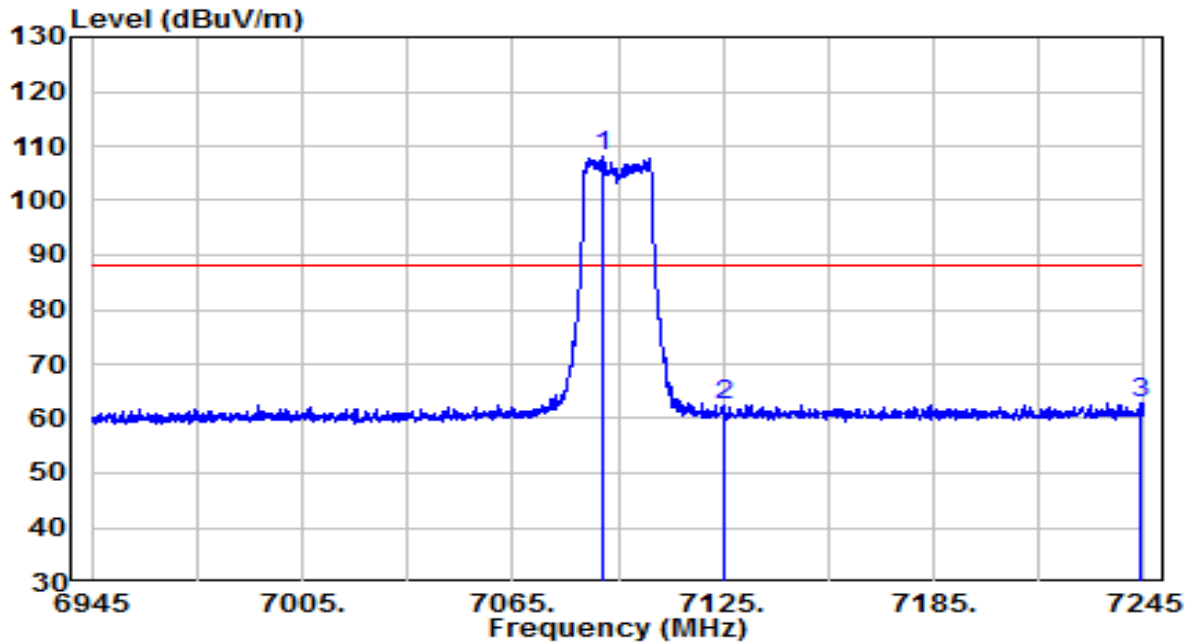


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7090.650	83.33	24.79	108.12	N/A	N/A	Peak
2	7125.000	37.81	24.79	62.60	-25.60	88.20	Peak
3	7243.650	37.76	25.25	63.01	-25.19	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 7095MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

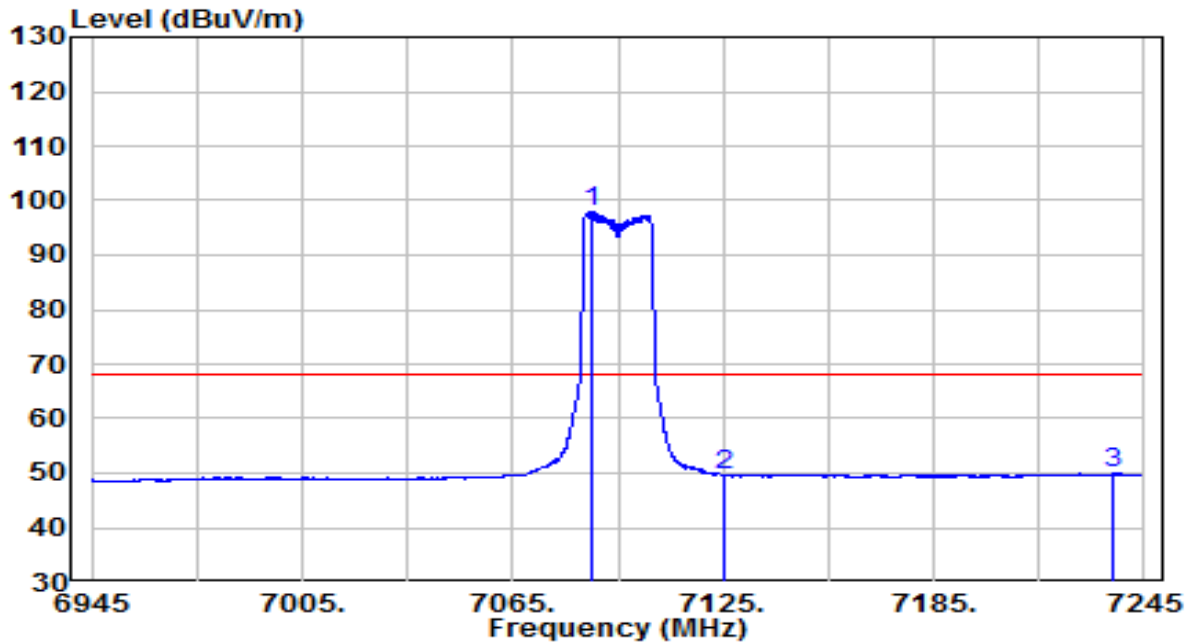


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	73.23	24.80	98.03	N/A	N/A	Average
2		24.96	24.79	49.75	-18.45	68.20	Average
3		24.62	25.25	49.87	-18.33	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

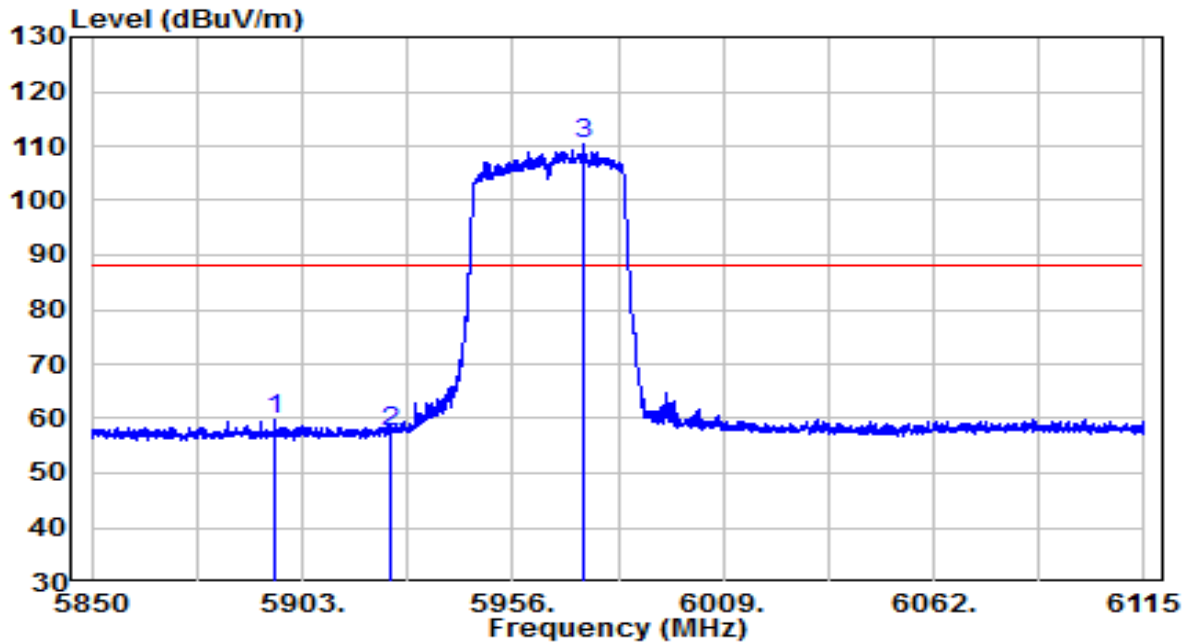


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5895.978	38.18	21.66	59.84	-28.36	88.20	Peak
2	5924.995	35.78	21.95	57.73	-30.47	88.20	Peak
3	* 5974.152	88.51	21.76	110.27	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

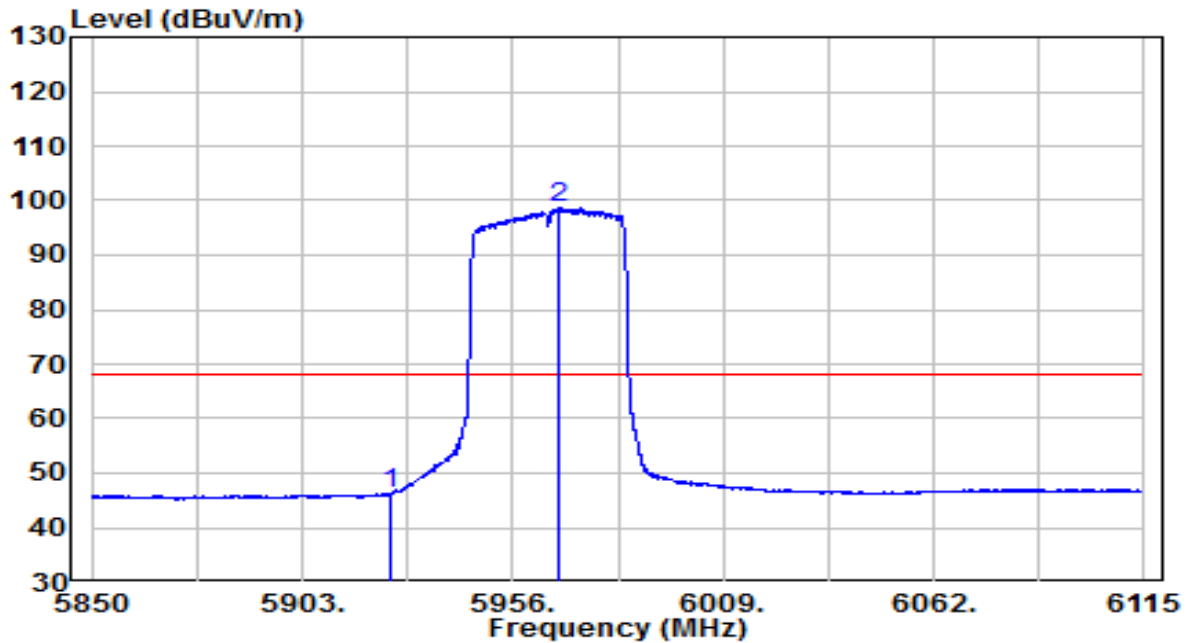


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5924.995	24.31	21.95	46.26	-21.94	68.20	Average
2	* 5967.792	77.12	21.72	98.84	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

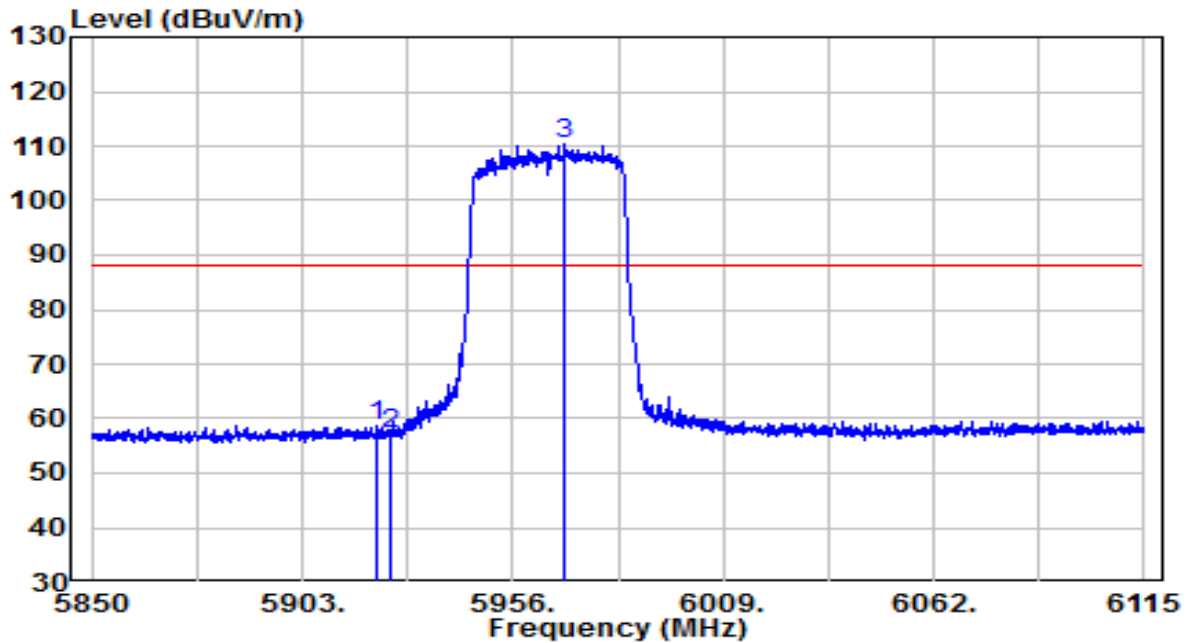


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5921.947	36.72	21.92	58.65	-29.55	88.20	Peak
2	5924.995	35.12	21.95	57.07	-31.13	88.20	Peak
3	* 5968.853	88.77	21.73	110.49	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 5965MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

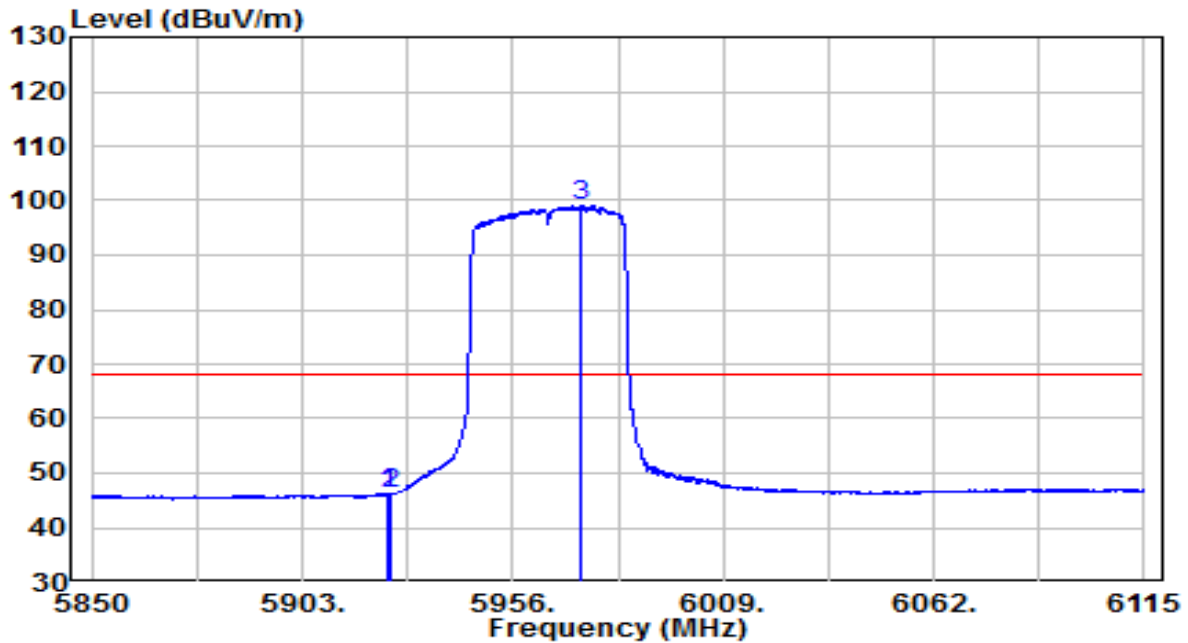


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5924.465	24.41	21.95	46.36	-21.84	68.20	Average
2	5924.995	24.17	21.95	46.11	-22.09	68.20	Average
3	* 5973.092	77.49	21.75	99.24	N/A	N/A	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

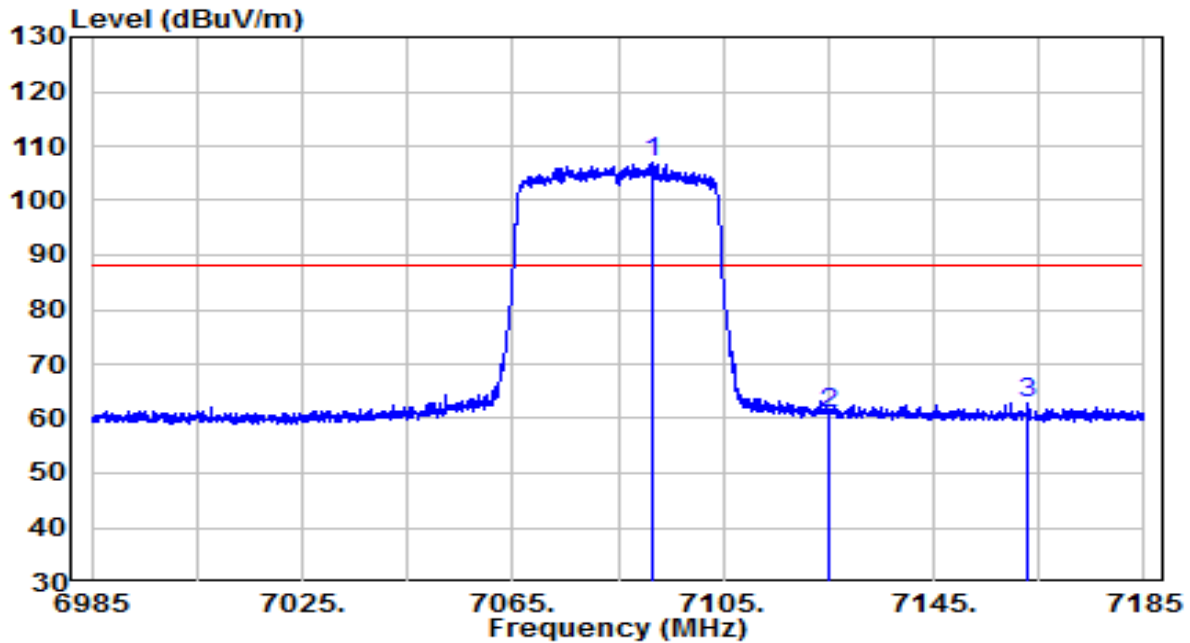


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7091.600	82.06	24.79	106.85	N/A	N/A	Peak
2	7125.000	36.30	24.79	61.09	-27.11	88.20	Peak
3	7163.000	37.95	25.04	63.00	-25.20	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

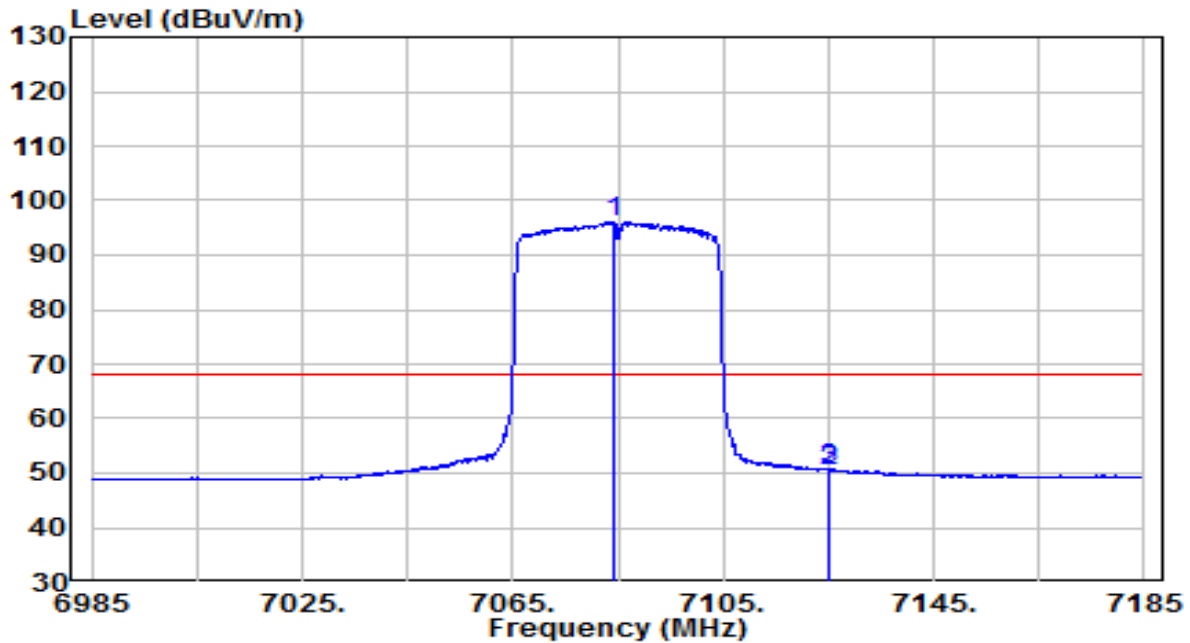


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7084.300	71.36	24.80	96.16	N/A	N/A	Average
2	7125.000	25.67	24.79	50.45	-17.75	68.20	Average
3	7125.300	25.87	24.79	50.66	-17.54	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

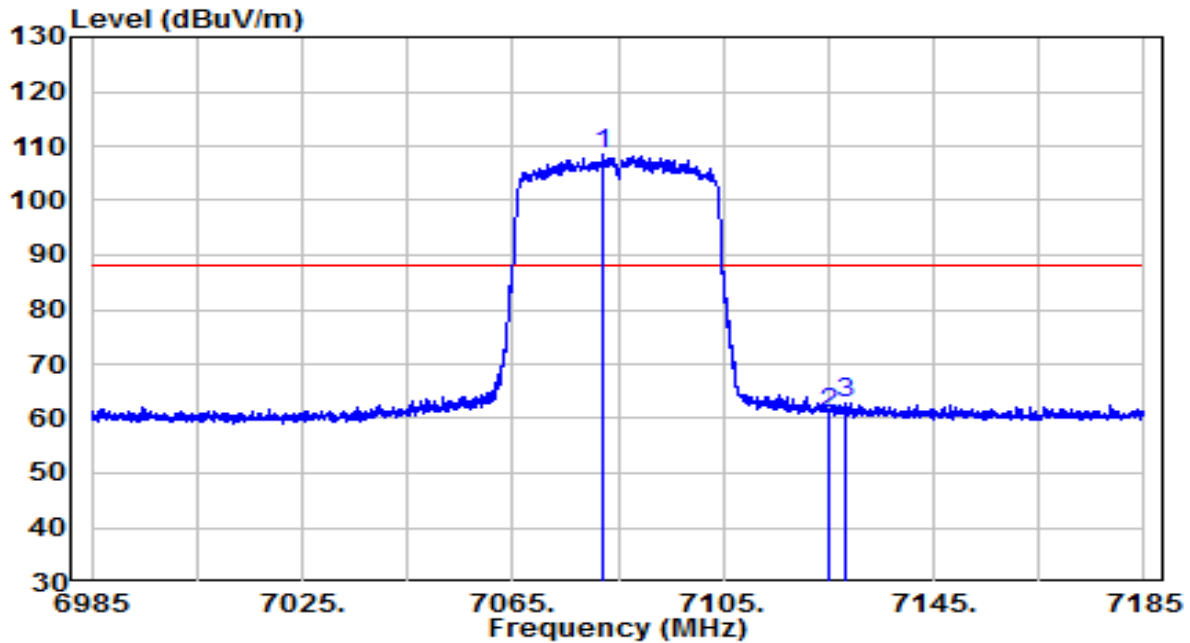


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 7082.100	83.86	24.80	108.65	N/A	N/A	Peak
2	7125.000	36.27	24.79	61.05	-27.15	88.20	Peak
3	7128.300	38.03	24.84	62.86	-25.34	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE40 at Channel 7085MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

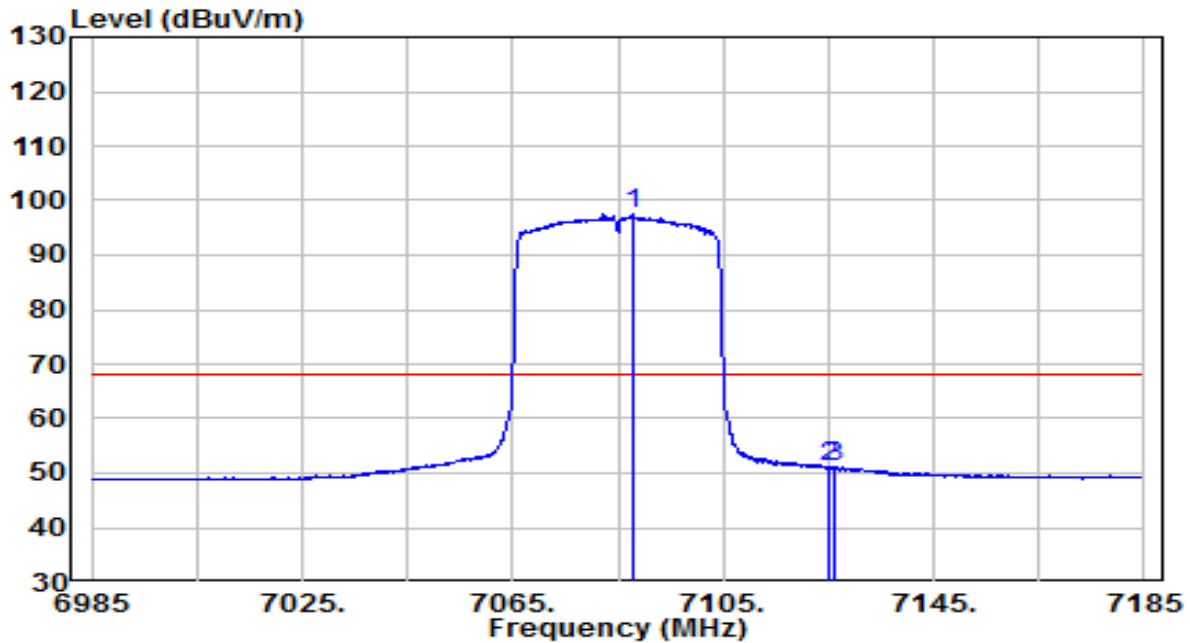


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7087.700	72.70	24.80	97.50	N/A	N/A	Average
2	7125.000	26.28	24.79	51.07	-17.13	68.20	Average
3	7125.900	26.52	24.80	51.32	-16.88	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

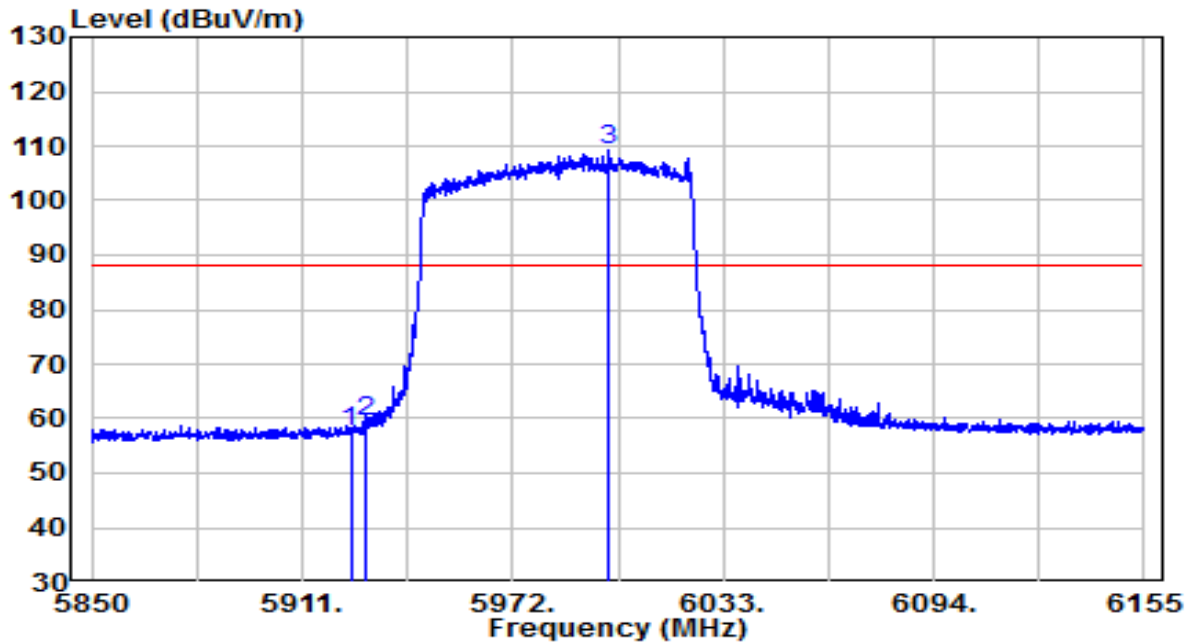


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5925.030	35.58	21.95	57.53	-30.67	88.20	Peak
2	5929.147	37.66	21.95	59.61	-28.59	88.20	Peak
3	* 5999.908	87.22	21.85	109.07	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

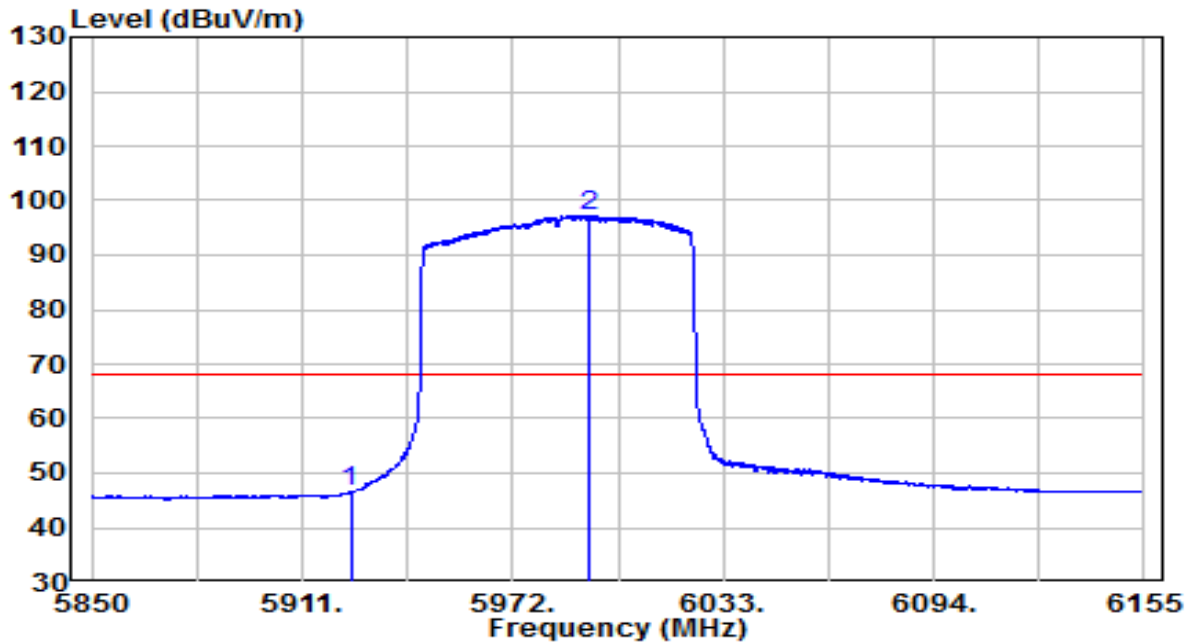


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5925.030	24.62	21.95	46.57	-21.63	68.20	Average
2	* 5994.265	75.53	21.80	97.33	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

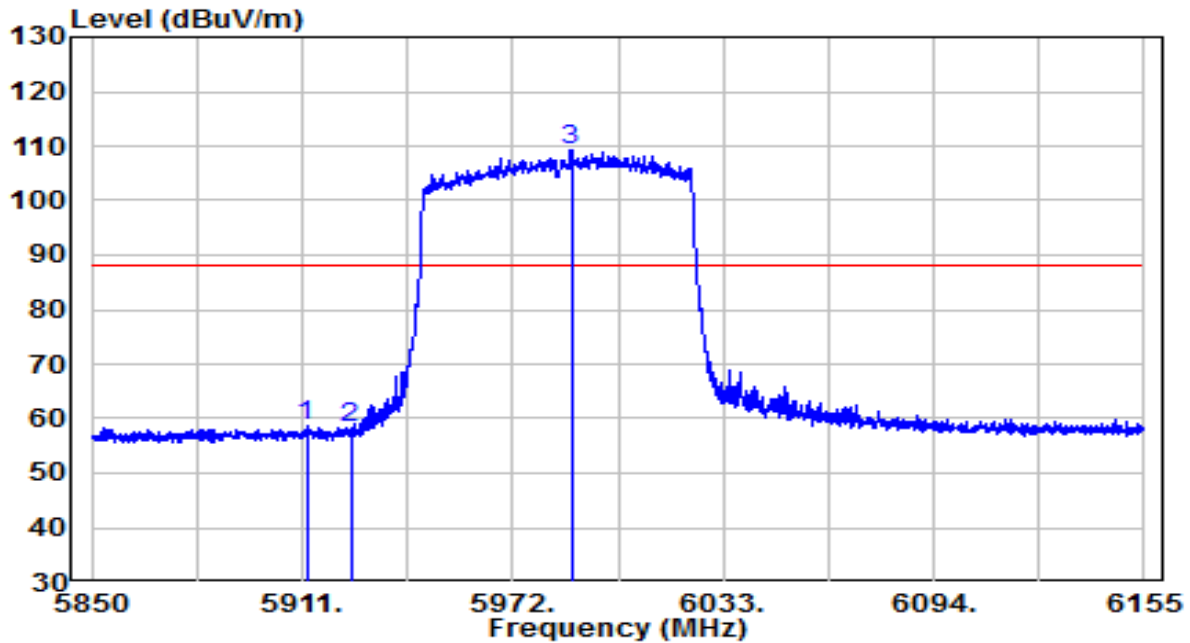


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5912.220	36.75	21.82	58.57	-29.63	88.20	Peak
2	5925.030	36.21	21.95	58.16	-30.04	88.20	Peak
3	* 5988.928	87.33	21.79	109.12	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 5985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

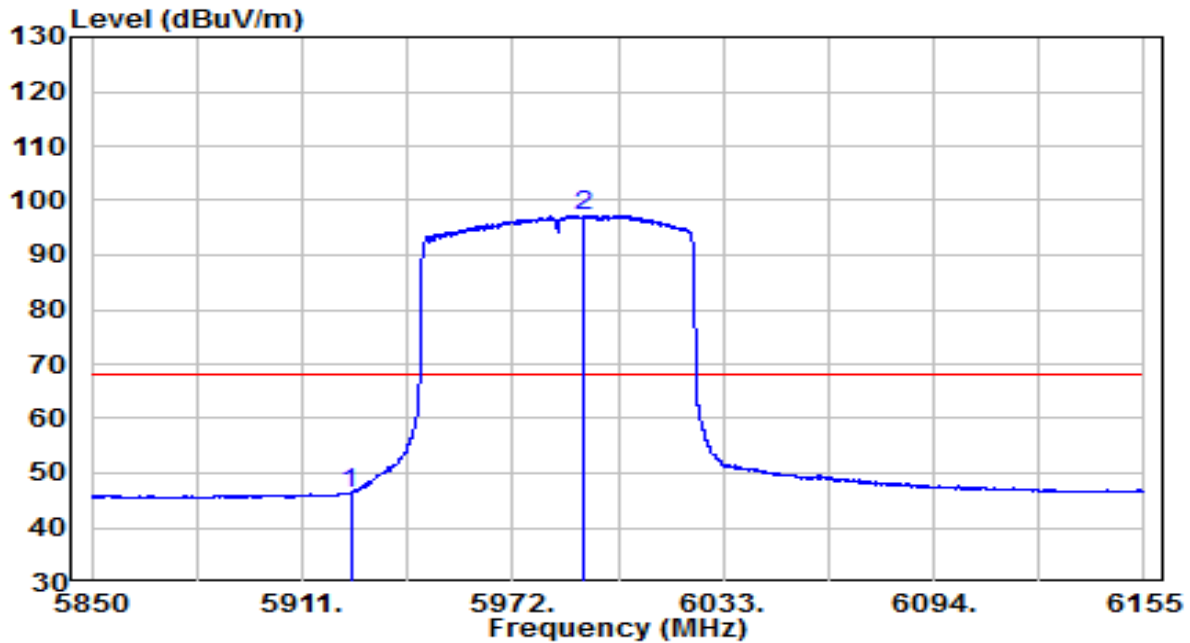


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5925.030	24.44	21.95	46.39	-21.81	68.20	Average
2	* 5992.893	75.52	21.80	97.32	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

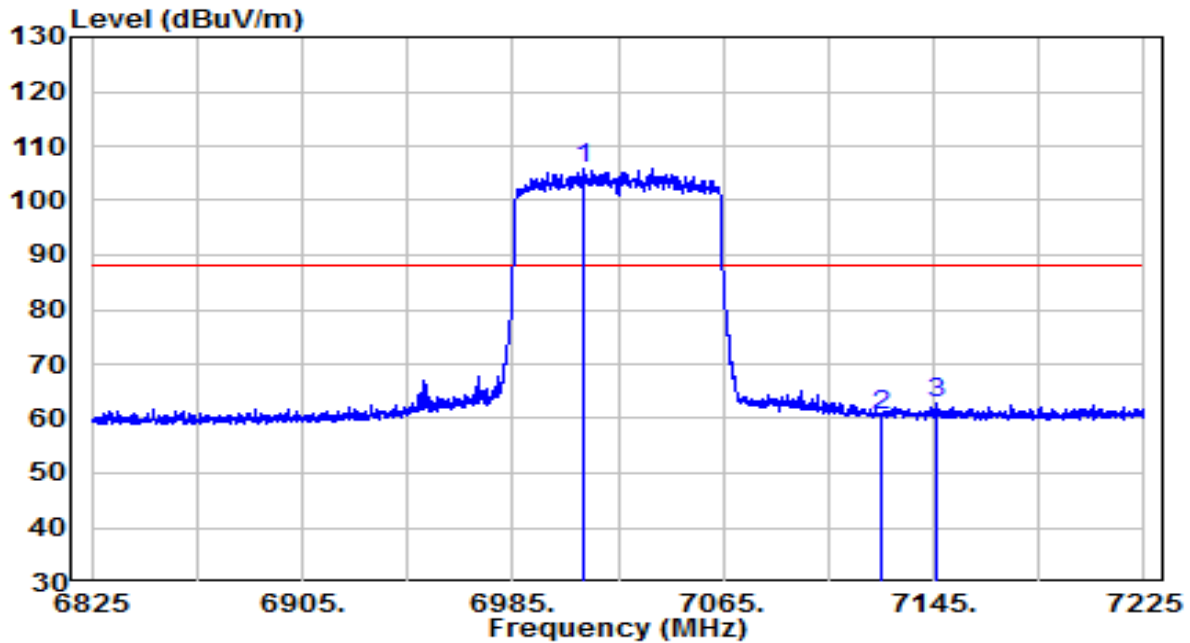


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7011.800	81.48	24.35	105.83	N/A	N/A	Peak
2	7125.000	35.67	24.79	60.46	-27.74	88.20	Peak
3	7146.200	37.74	25.03	62.78	-25.42	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

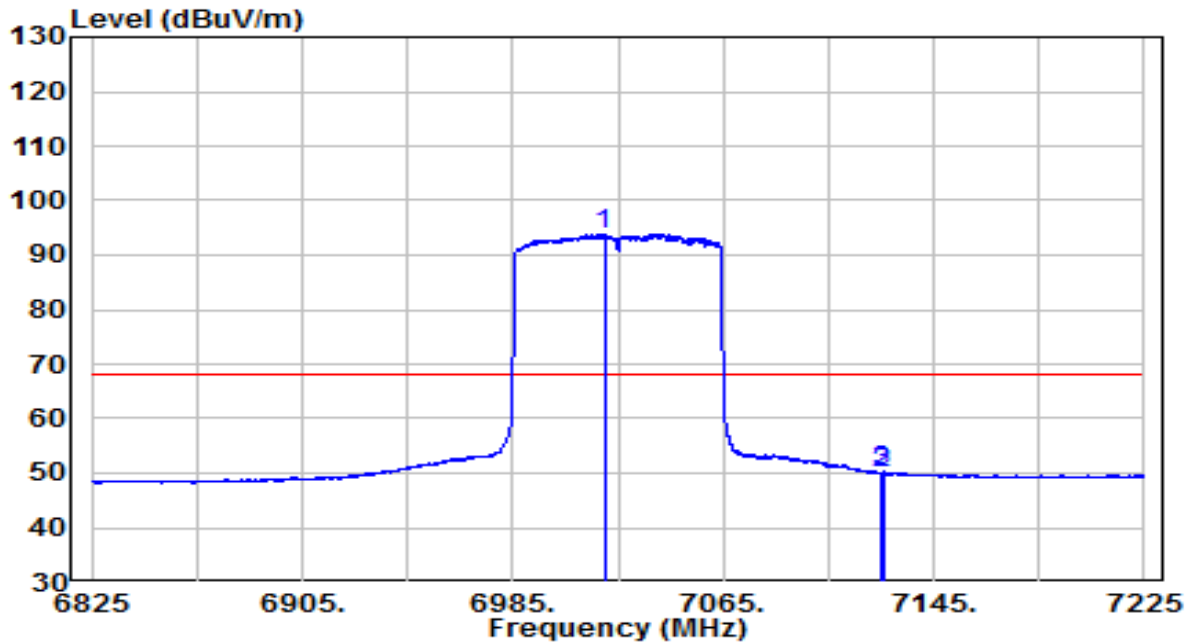


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7019.800	69.42	24.32	93.74	N/A	N/A	Average
2	7125.000	25.33	24.79	50.11	-18.09	68.20	Average
3	7125.600	25.44	24.80	50.23	-17.97	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

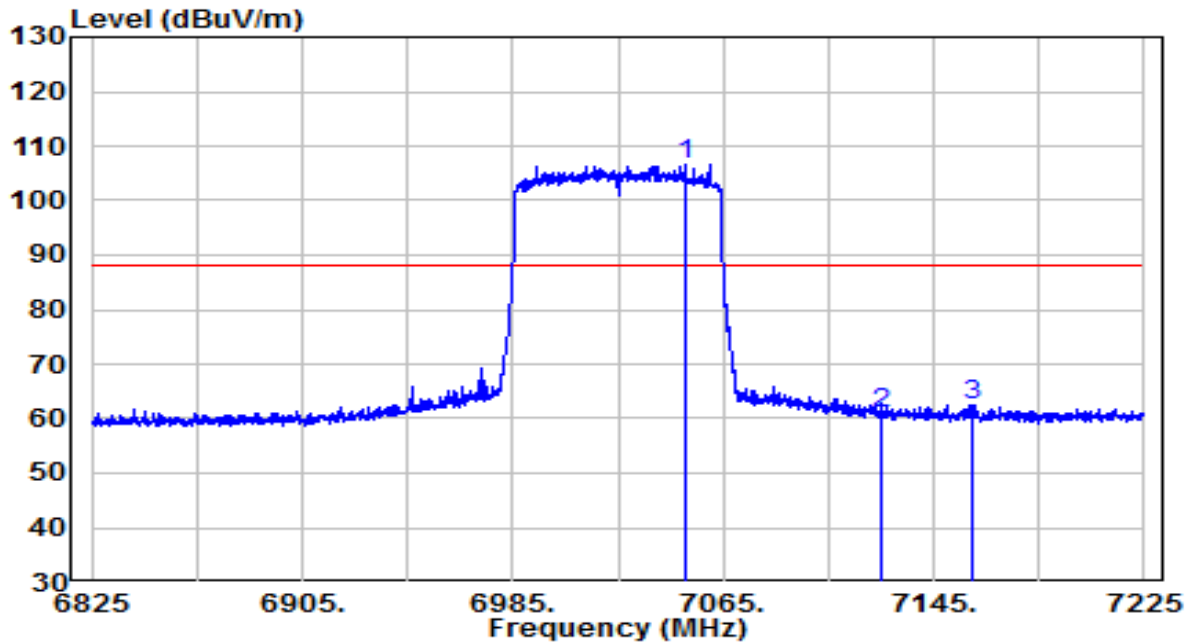


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7050.200	82.22	24.56	106.78	N/A	N/A	Peak
2	7125.000	36.08	24.79	60.87	-27.33	88.20	Peak
3	7159.800	37.27	25.05	62.33	-25.87	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE80 at Channel 7025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

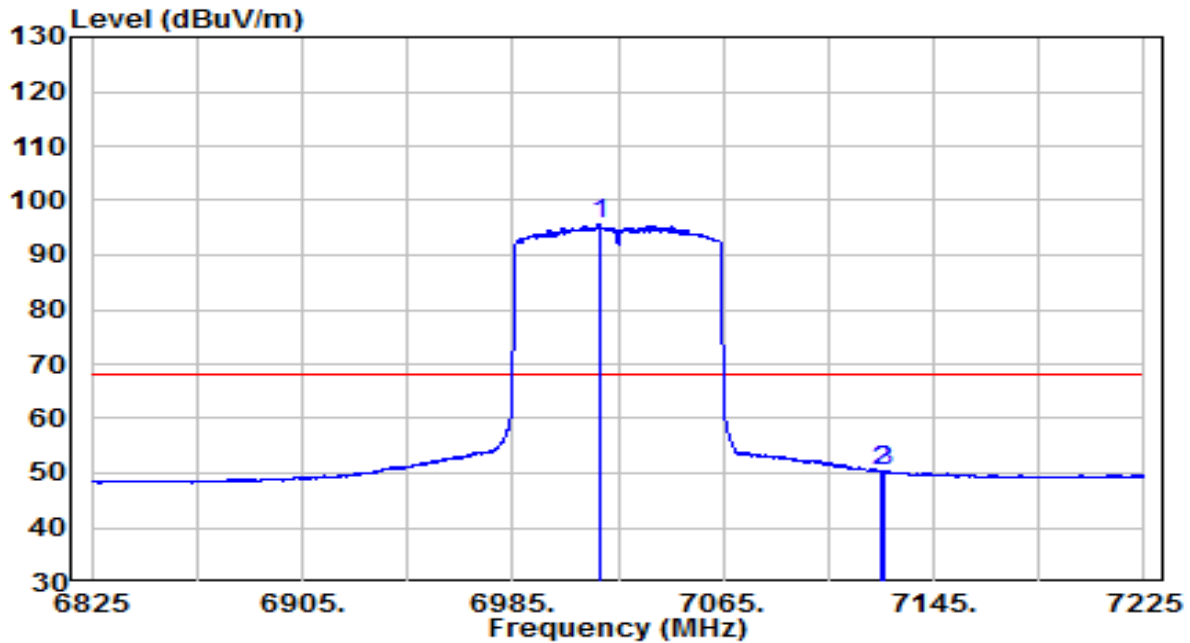


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 7017.800	71.24	24.32	95.56	N/A	N/A	Average
2	7125.000	25.56	24.79	50.35	-17.85	68.20	Average
3	7126.400	25.55	24.81	50.36	-17.84	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

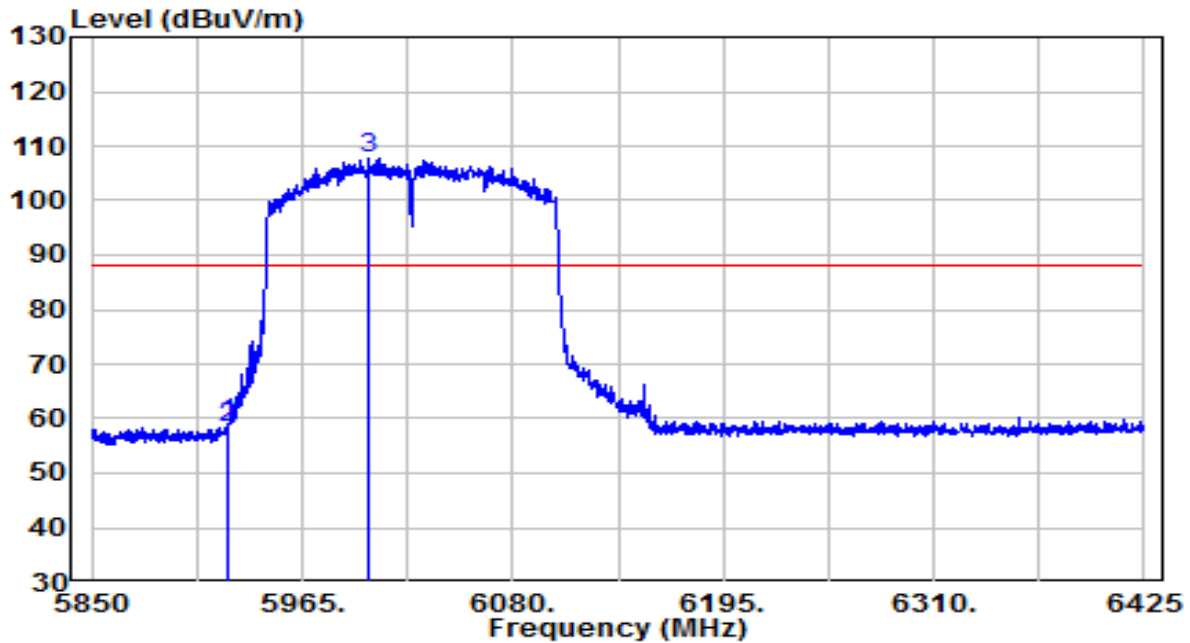


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5923.888	37.14	21.95	59.09	-29.11	88.20	Peak
2	5925.038	36.42	21.95	58.37	-29.83	88.20	Peak
3	* 6001.800	85.80	21.86	107.66	N/A	N/A	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

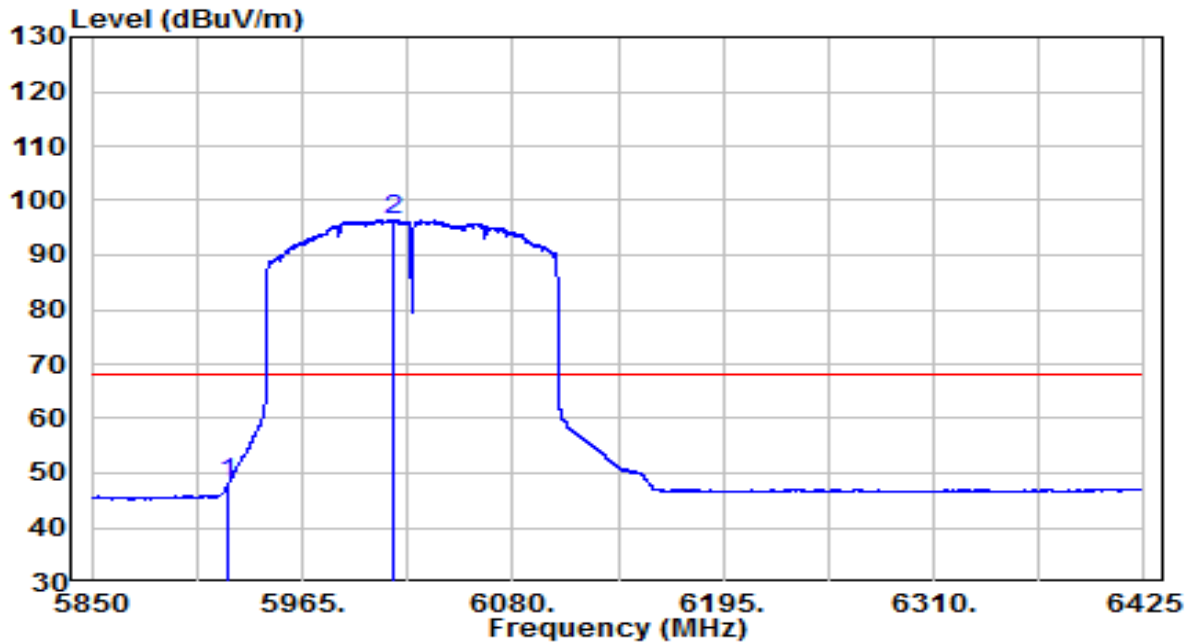


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5925.038	26.24	21.95	48.18	-20.02	68.20	Average
2	* 6015.313	74.56	21.91	96.46	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

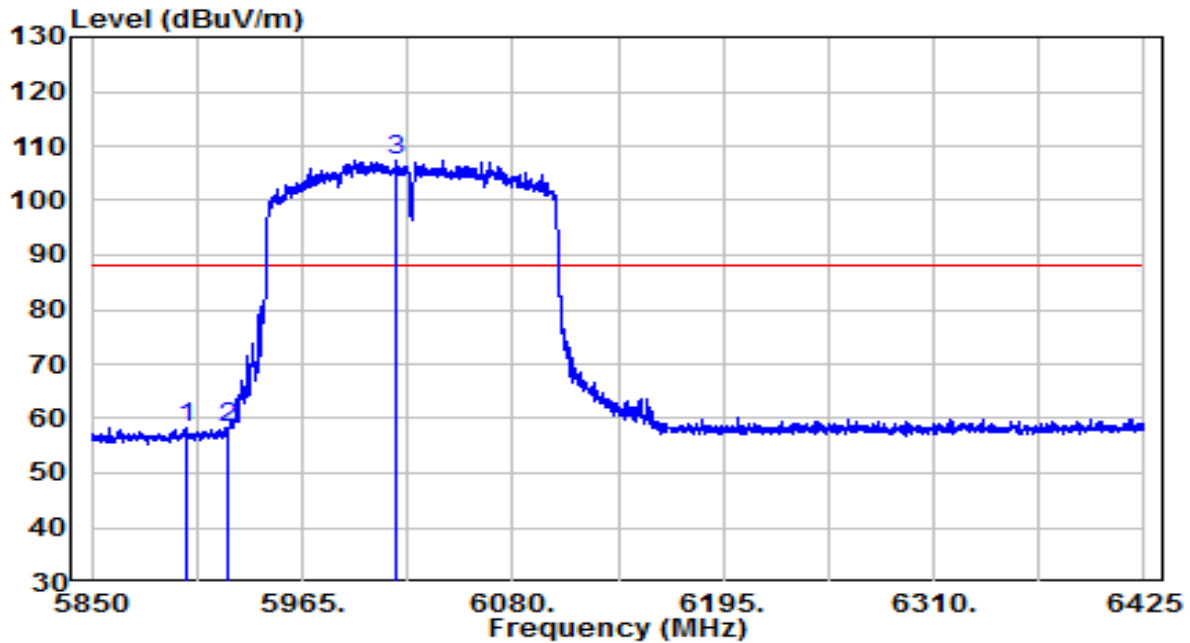


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5901.750	36.63	21.70	58.34	-29.86	88.20	Peak
2	5925.038	36.22	21.95	58.17	-30.03	88.20	Peak
3	* 6015.888	85.49	21.90	107.40	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6025MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

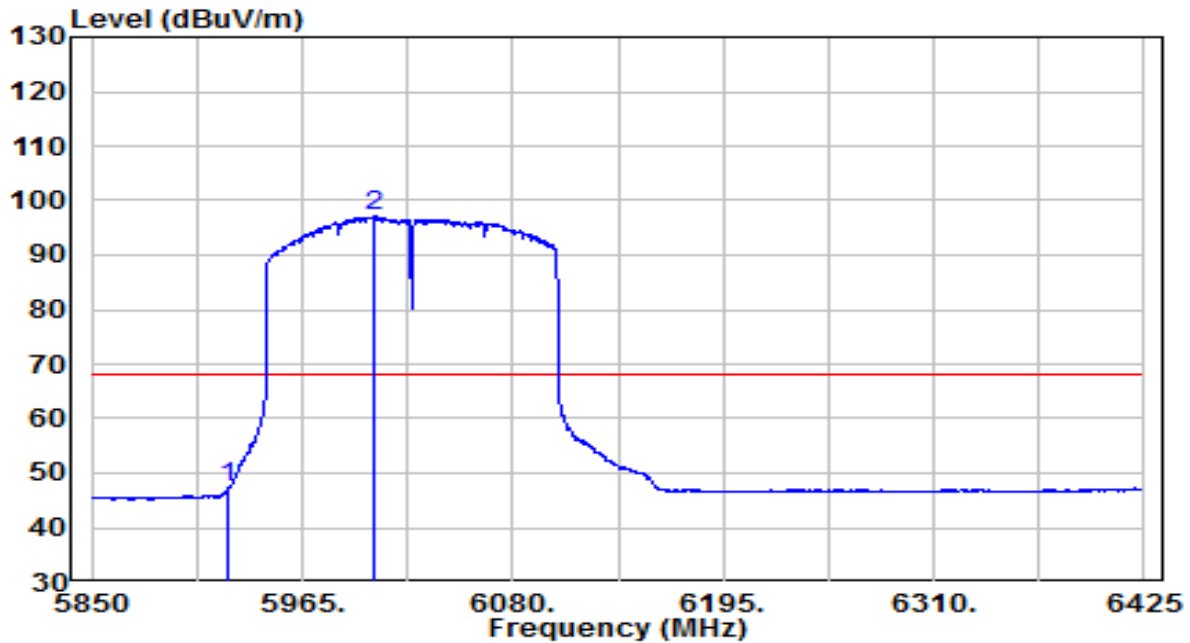


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	5925.038	25.35	21.95	47.30	-20.90	68.20	Average
2	* 6004.100	75.25	21.87	97.12	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

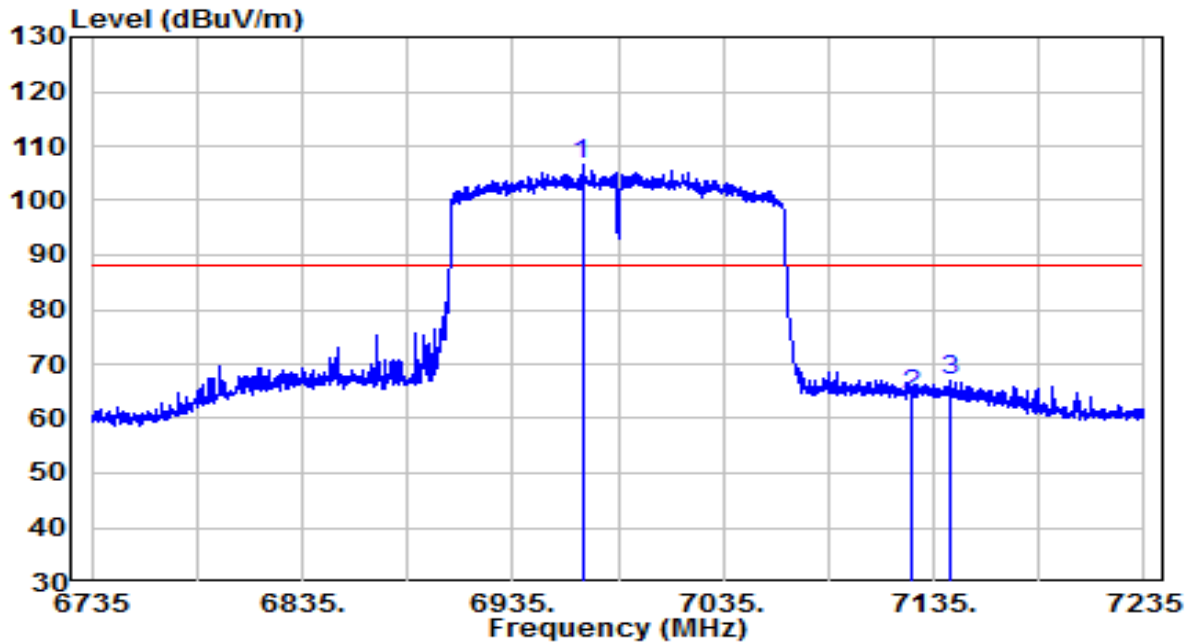


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 6968.000	82.25	24.18	106.42	N/A	N/A	Peak
2	7125.000	39.41	24.79	64.19	-24.01	88.20	Peak
3	7143.250	41.84	25.01	66.85	-21.35	88.20	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

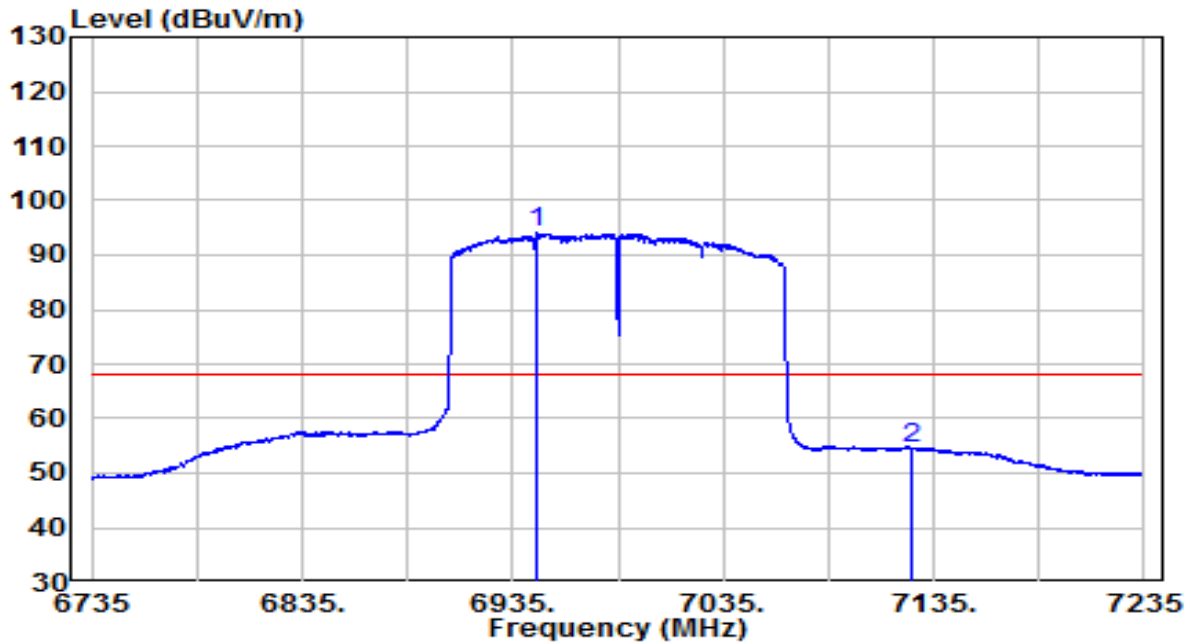


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	6946.750	70.07	24.06	94.13	N/A	N/A	Average
2		7125.000	29.85	24.79	54.64	-13.56	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

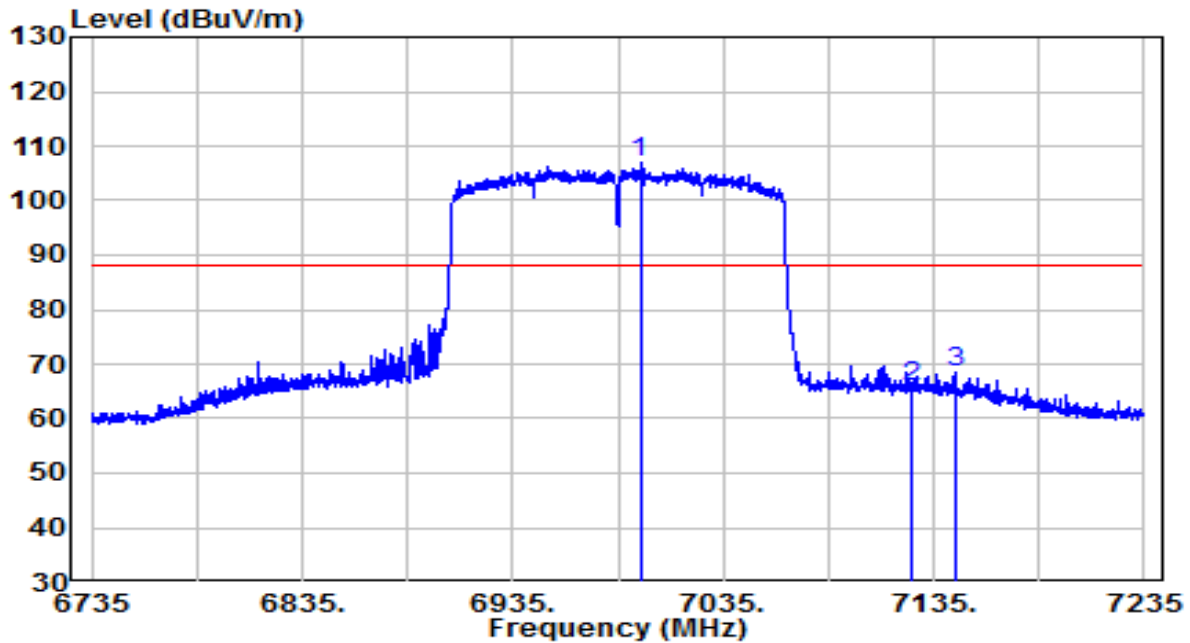


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 6995.500	82.77	24.39	107.16	N/A	N/A	Peak
2	7125.000	41.08	24.79	65.87	-22.33	88.20	Peak
3	7145.000	43.55	25.02	68.57	-19.63	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	AC1_BBHA9120D_1-18GHz	Temp. / Humidity	21.7°C/41.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Lucas Wang
Test Mode	Transmit by 802.11ax-HE160 at Channel 6985MHz N <sub>SS</sub> =4	Test Voltage	120V/60Hz

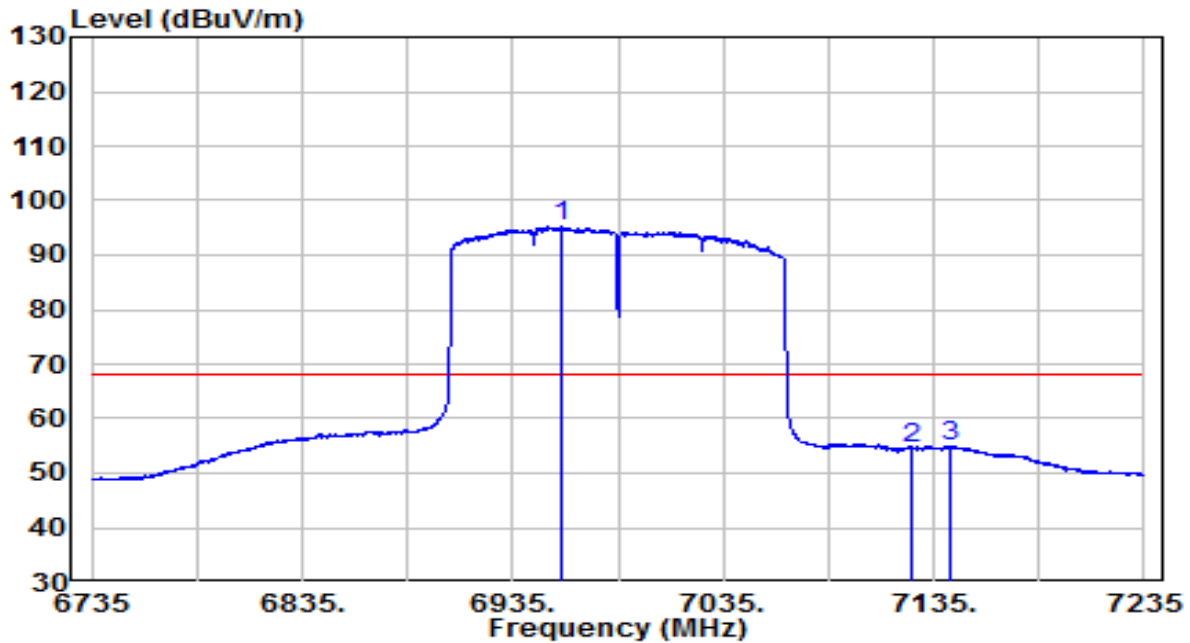


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 6958.500	71.00	24.11	95.11	N/A	N/A	Average
2	7125.000	29.87	24.79	54.66	-13.54	68.20	Average
3	7143.250	29.82	25.01	54.82	-13.38	68.20	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**A.10 AC Conducted Emissions Test Result**

EUT	ACCESS POINT	Date of Test	2022-02-15
Factor	ENV216_101683_L1_Filter Off	Temp. / Humidity	20.3°C /43.5%
Polarity	Line1	Site / Test Engineer	SR2 / Helen Han
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

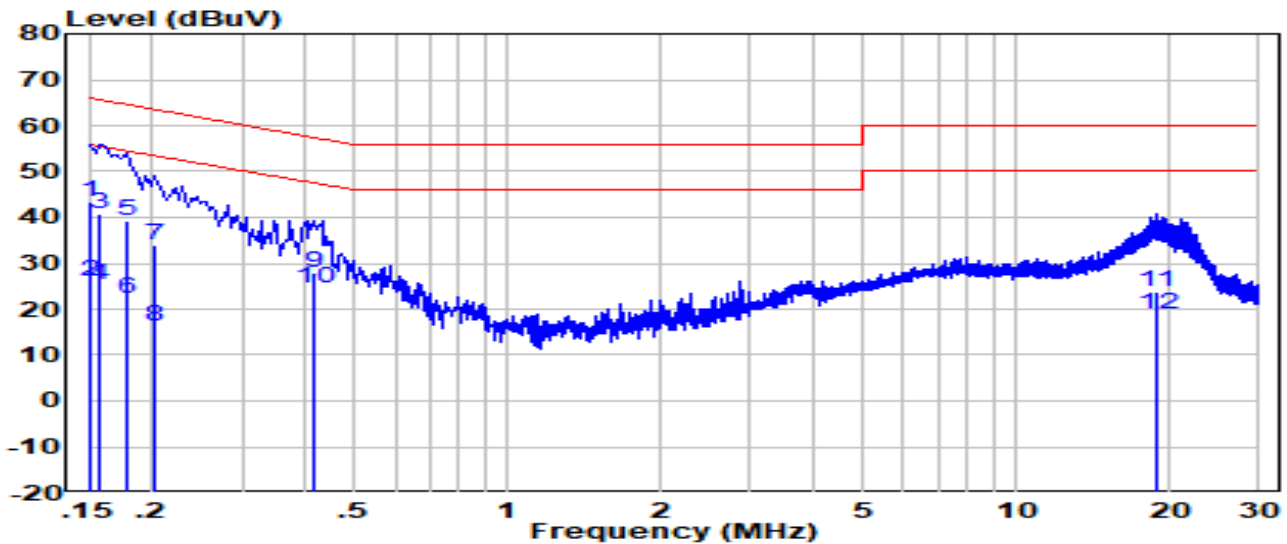


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Remark (QP/PK/AV)
1	* 0.150	33.89	9.61	43.50	-22.50	66.00	QP
2	0.150	16.39	9.61	26.00	-30.00	56.00	Average
3	0.158	31.09	9.61	40.70	-24.87	65.57	QP
4	0.158	15.49	9.61	25.10	-30.47	55.57	Average
5	0.178	29.47	9.63	39.10	-25.48	64.58	QP
6	0.178	12.77	9.63	22.40	-32.18	54.58	Average
7	0.202	24.26	9.64	33.90	-29.63	63.53	QP
8	0.202	6.56	9.64	16.20	-37.33	53.53	Average
9	0.418	18.32	9.68	28.00	-29.49	57.49	QP
10	0.418	14.72	9.68	24.40	-23.09	47.49	Average
11	18.860	13.57	10.33	23.90	-36.10	60.00	QP
12	18.860	8.57	10.33	18.90	-31.10	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-02-15
Factor	ENV216_101683_N_Filter Off	Temp. / Humidity	20.3°C /43.5%
Polarity	Neutral	Site / Test Engineer	SR2 / Helen Han
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

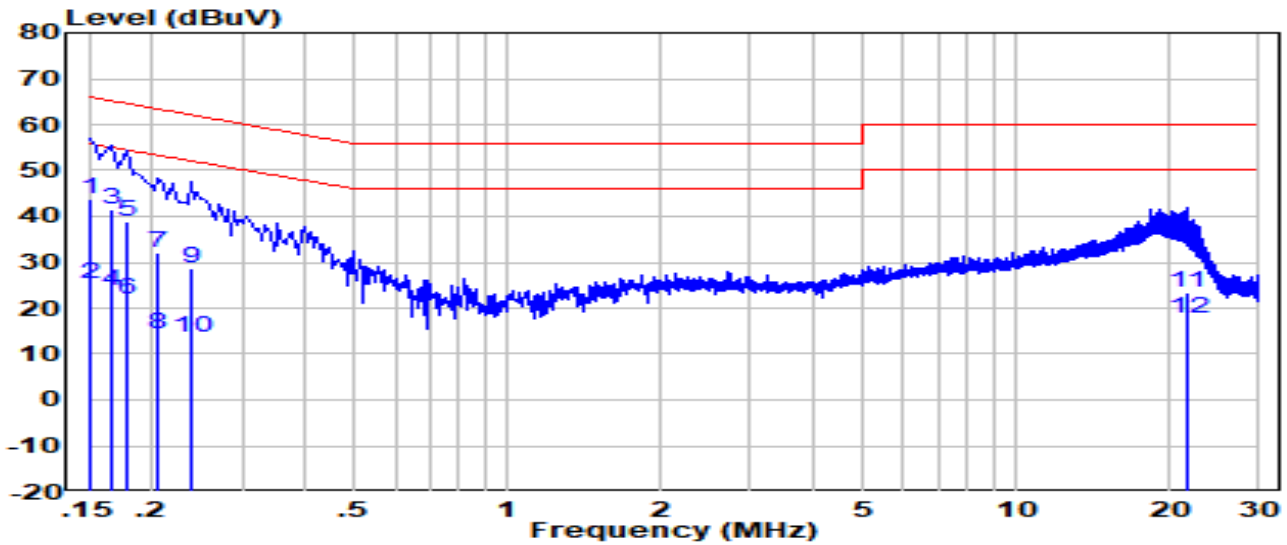

No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V)	Remark (QP/PK/AV)	
1	*	0.150	34.00	9.60	43.60	-22.40	66.00	QP
2		0.150	15.70	9.60	25.30	-30.70	56.00	Average
3		0.166	31.99	9.61	41.60	-23.56	65.16	QP
4		0.166	14.19	9.61	23.80	-31.36	55.16	Average
5		0.178	29.38	9.62	39.00	-25.58	64.58	QP
6		0.178	12.08	9.62	21.70	-32.88	54.58	Average
7		0.206	22.27	9.63	31.90	-31.47	63.37	QP
8		0.206	4.67	9.63	14.30	-39.07	53.37	Average
9		0.238	18.97	9.63	28.60	-33.57	62.17	QP
10		0.238	4.07	9.63	13.70	-38.47	52.17	Average
11		21.620	12.96	10.34	23.30	-36.70	60.00	QP
12		21.620	7.36	10.34	17.70	-32.30	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dB $\mu$ V) = Reading(dB $\mu$ V) + C.F (Correction Factor).

## **Appendix B – Test Setup Photograph**

Refer to “2109RSU026-UT” file.



## Appendix C – EUT Photograph

Refer to “2109RSU026-UE” file.

————— The End —————