


Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2474MHz	

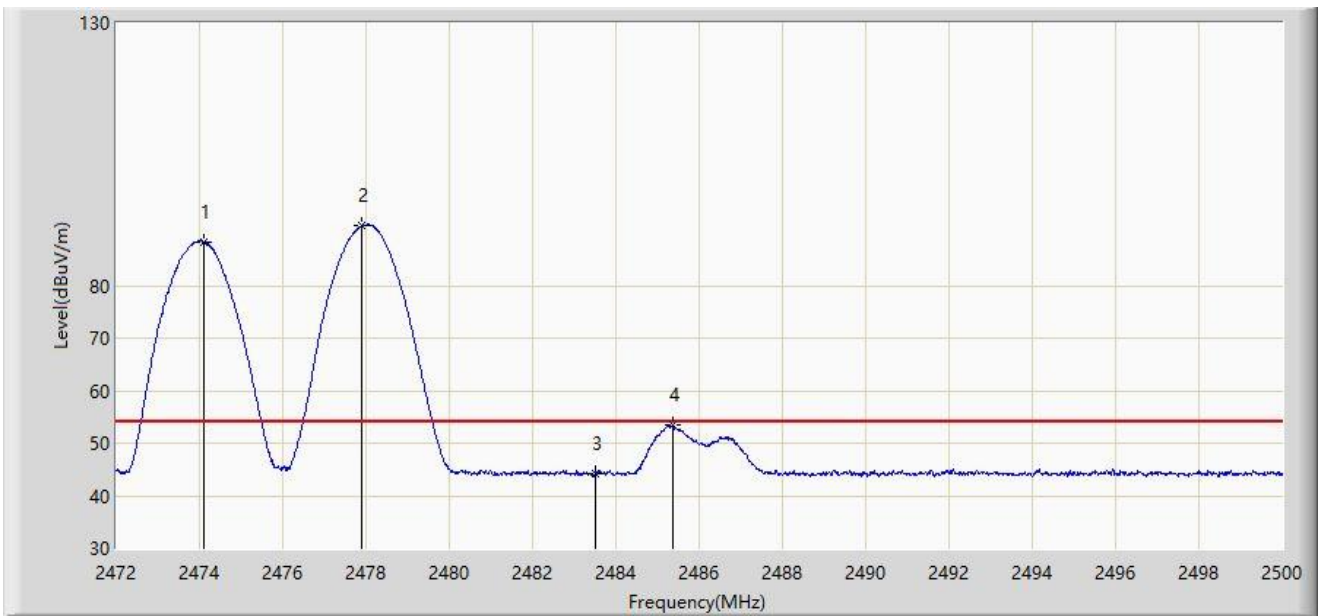


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2474.114	88.364	55.977	N/A	N/A	32.387	AV
2		2477.908	91.351	58.966	N/A	N/A	32.385	AV
3		2483.500	44.330	11.948	-9.670	54.000	32.382	AV
4		2485.356	53.421	21.039	-0.579	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2474MHz	

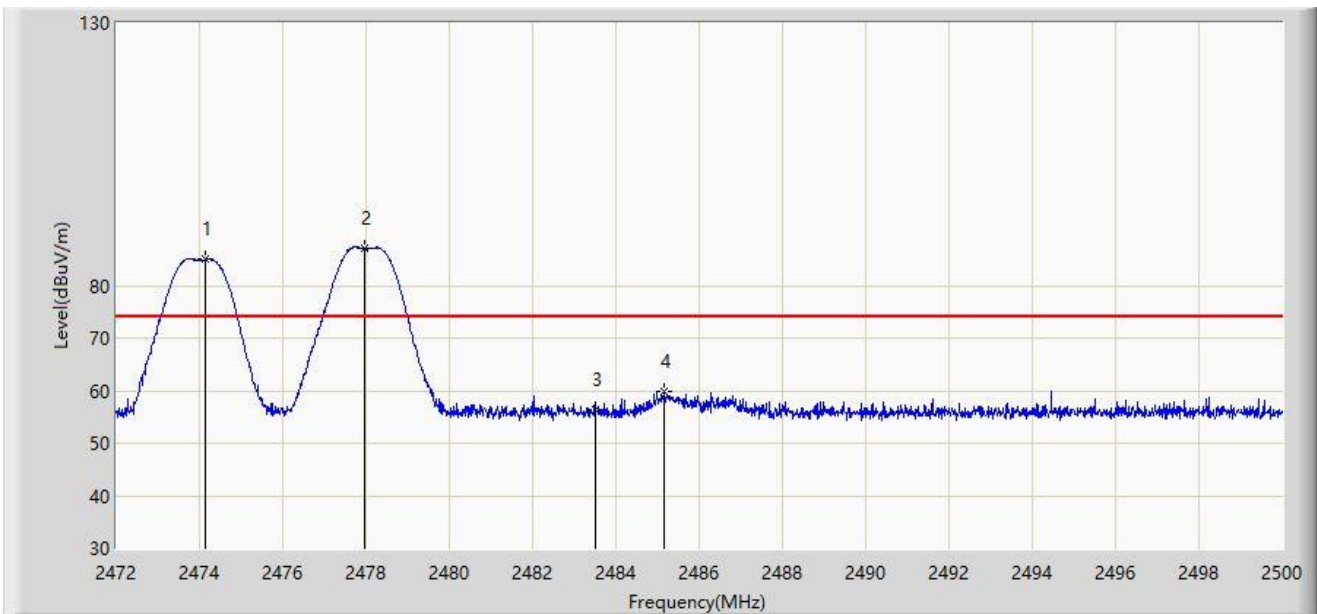


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2474.156	84.974	52.587	N/A	N/A	32.387	PK
2		2477.978	87.200	54.815	N/A	N/A	32.385	PK
3		2483.500	56.232	23.850	-17.768	74.000	32.382	PK
4		2485.146	59.781	27.399	-14.219	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2474MHz	

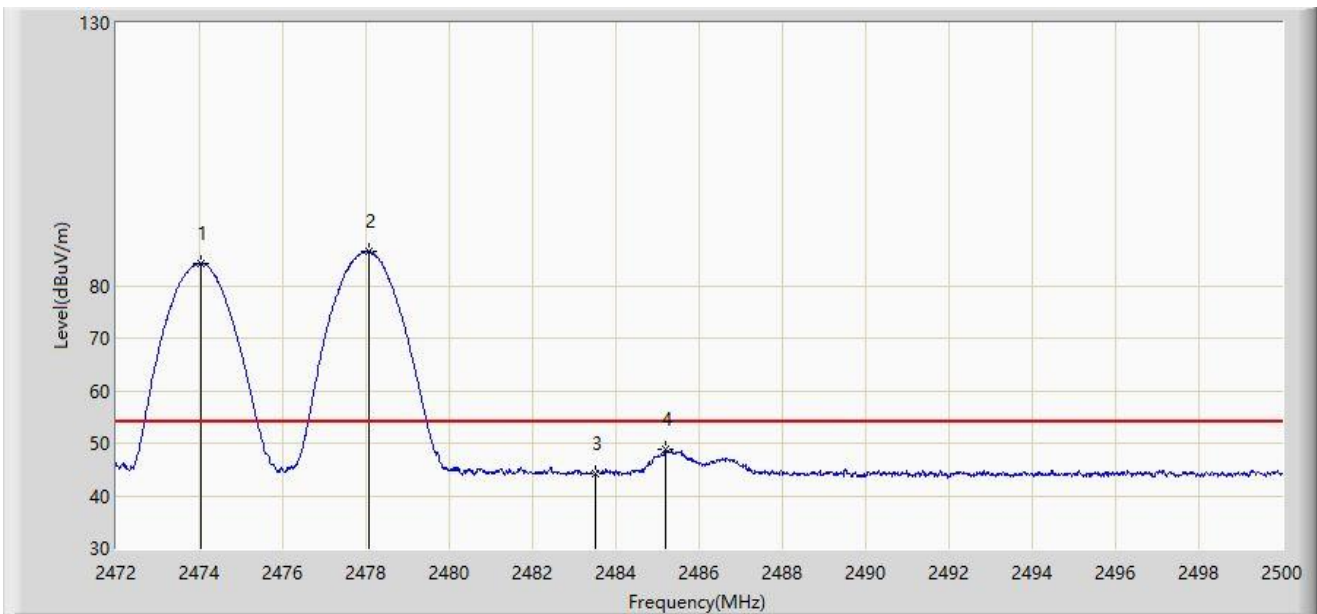


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2474.030	84.205	51.818	N/A	N/A	32.387	AV
2		2478.076	86.447	54.062	N/A	N/A	32.385	AV
3		2483.500	44.271	11.889	-9.729	54.000	32.382	AV
4		2485.202	48.800	16.418	-5.200	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

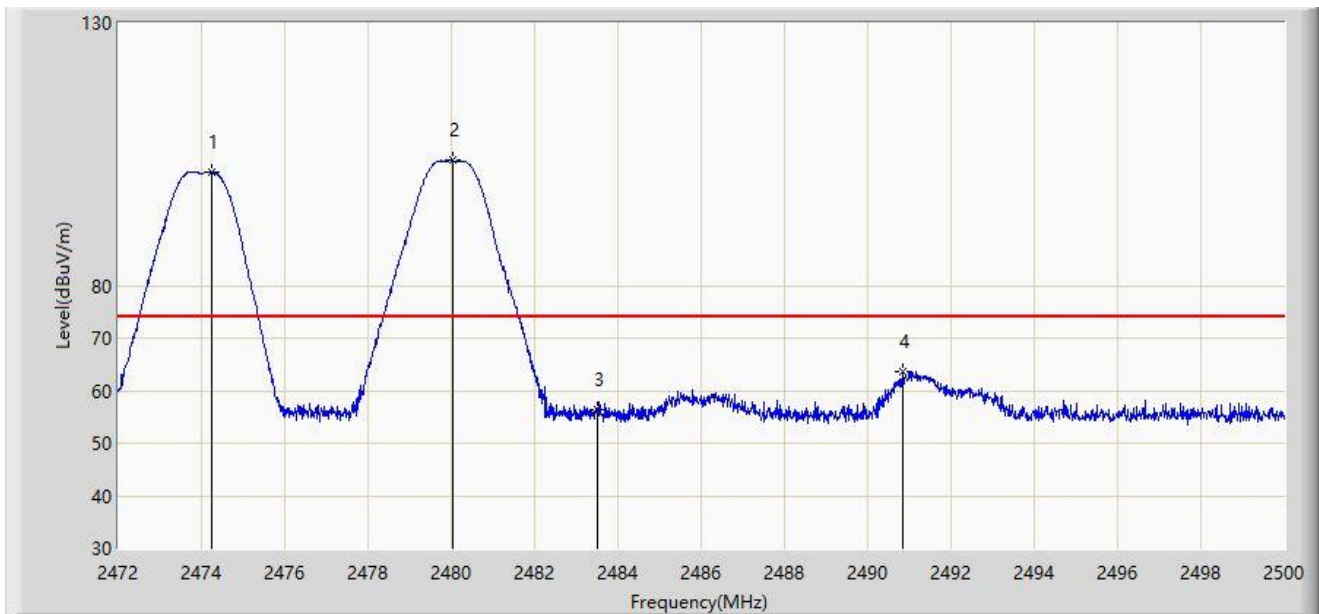


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2474.254	101.621	69.234	N/A	N/A	32.387	PK
2		2480.036	103.835	71.451	N/A	N/A	32.384	PK
3		2483.500	56.257	23.875	-17.743	74.000	32.382	PK
4		2490.844	63.594	31.215	-10.406	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

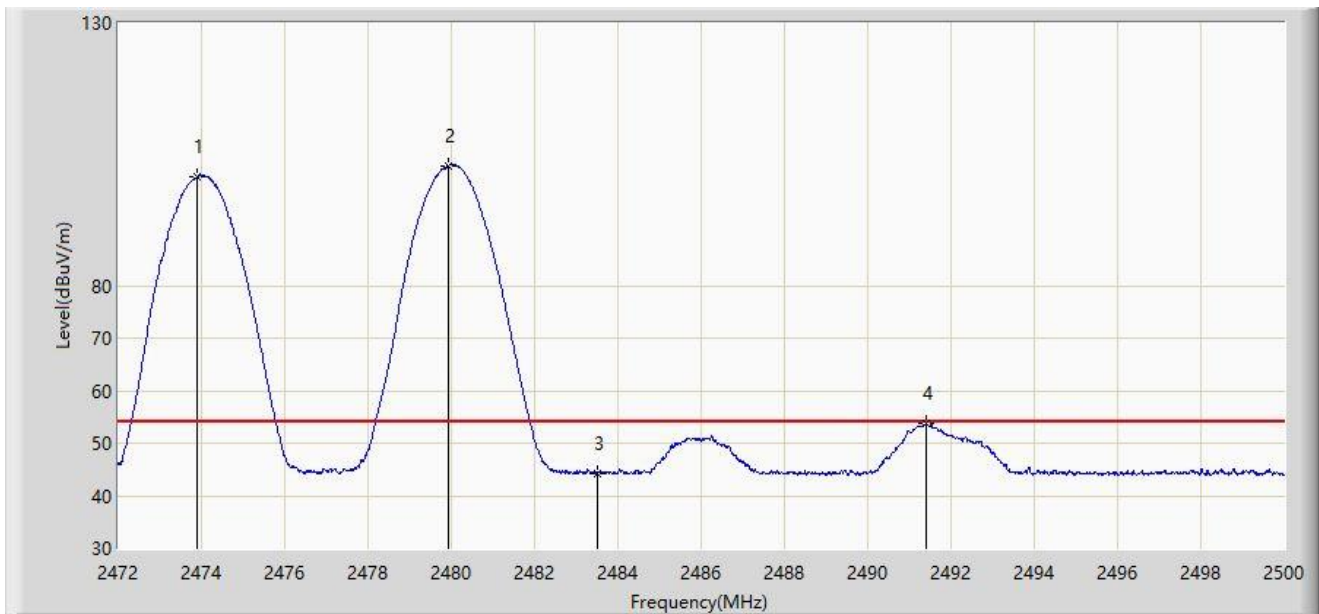


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2473.904	100.711	68.324	N/A	N/A	32.387	AV
2		2479.938	102.862	70.478	N/A	N/A	32.384	AV
3		2483.500	44.343	11.961	-9.657	54.000	32.382	AV
4		2491.418	53.712	21.333	-0.288	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

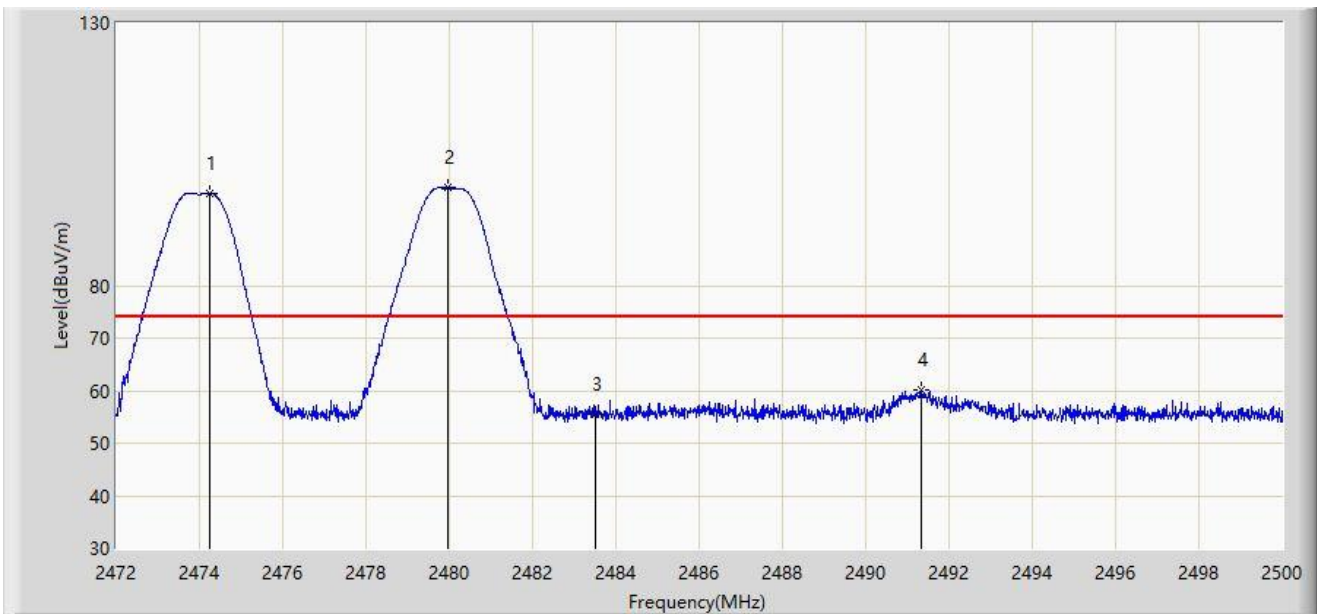


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2474.254	97.595	65.208	N/A	N/A	32.387	PK
2		2479.980	98.622	66.238	N/A	N/A	32.384	PK
3		2483.500	55.445	23.063	-18.555	74.000	32.382	PK
4		2491.348	60.041	27.662	-13.959	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

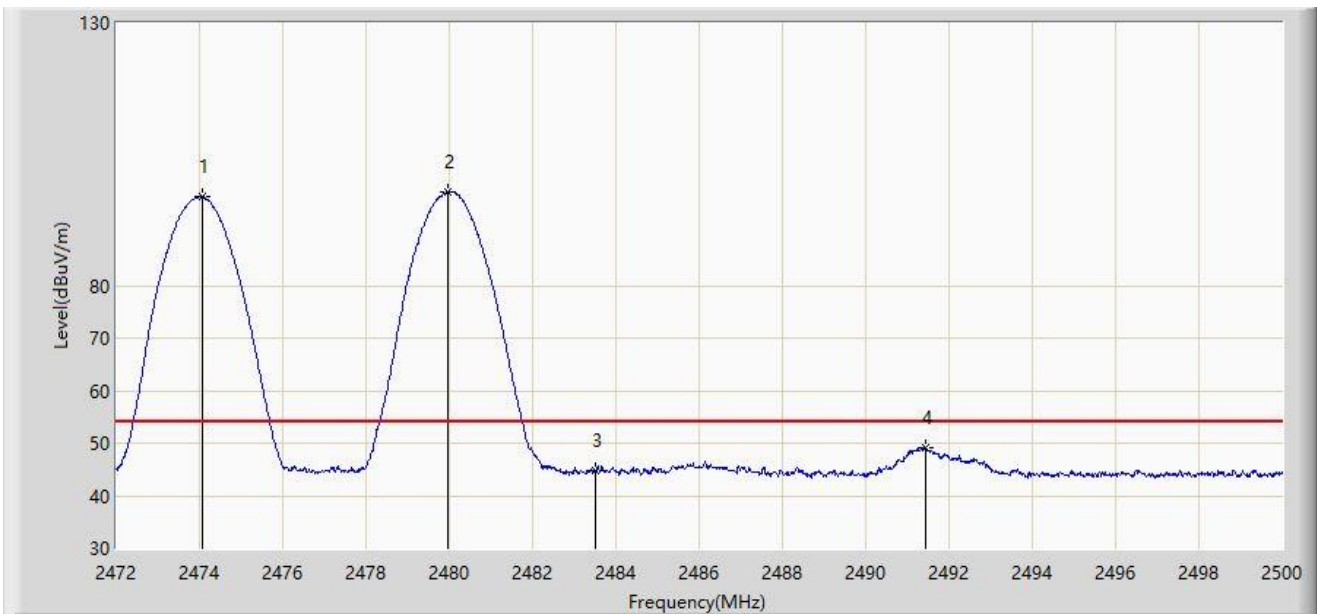


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2474.072	96.939	64.552	N/A	N/A	32.387	AV
2		2479.980	97.860	65.476	N/A	N/A	32.384	AV
3		2483.500	44.869	12.487	-9.131	54.000	32.382	AV
4		2491.446	49.175	16.796	-4.825	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2476MHz	

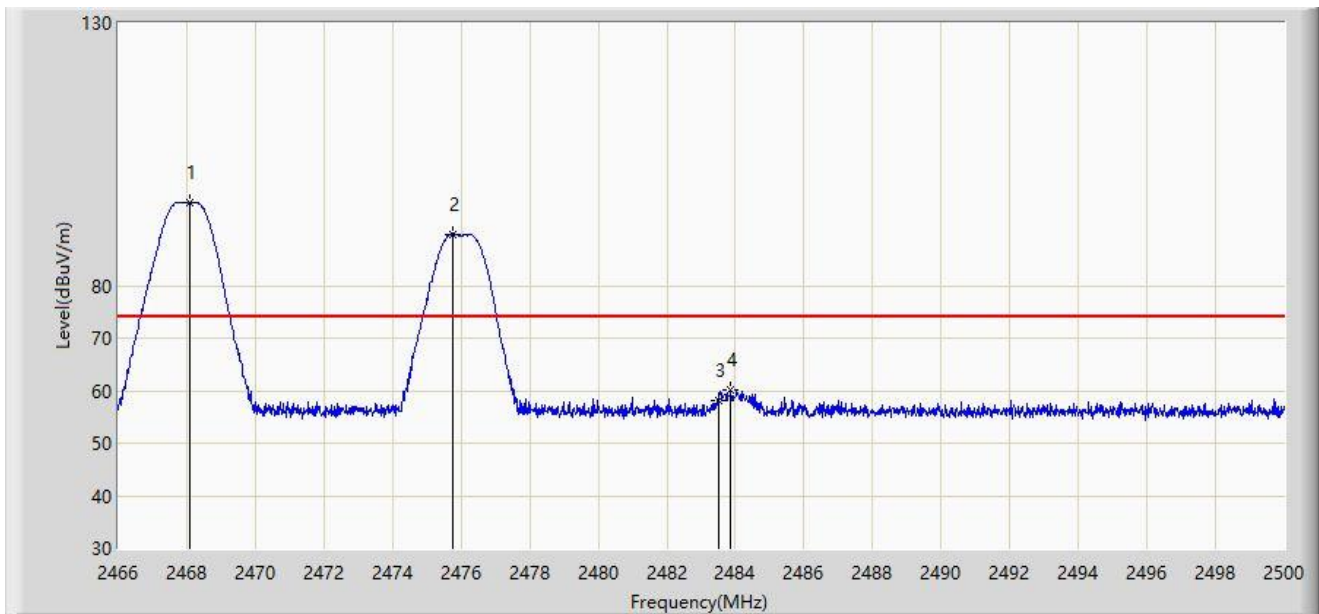


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2468.091	95.708	63.333	N/A	N/A	32.375	PK
2	*	2475.758	89.793	57.407	N/A	N/A	32.386	PK
3		2483.500	58.199	25.817	-15.801	74.000	32.382	PK
4		2483.850	60.174	27.792	-13.826	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2476MHz	

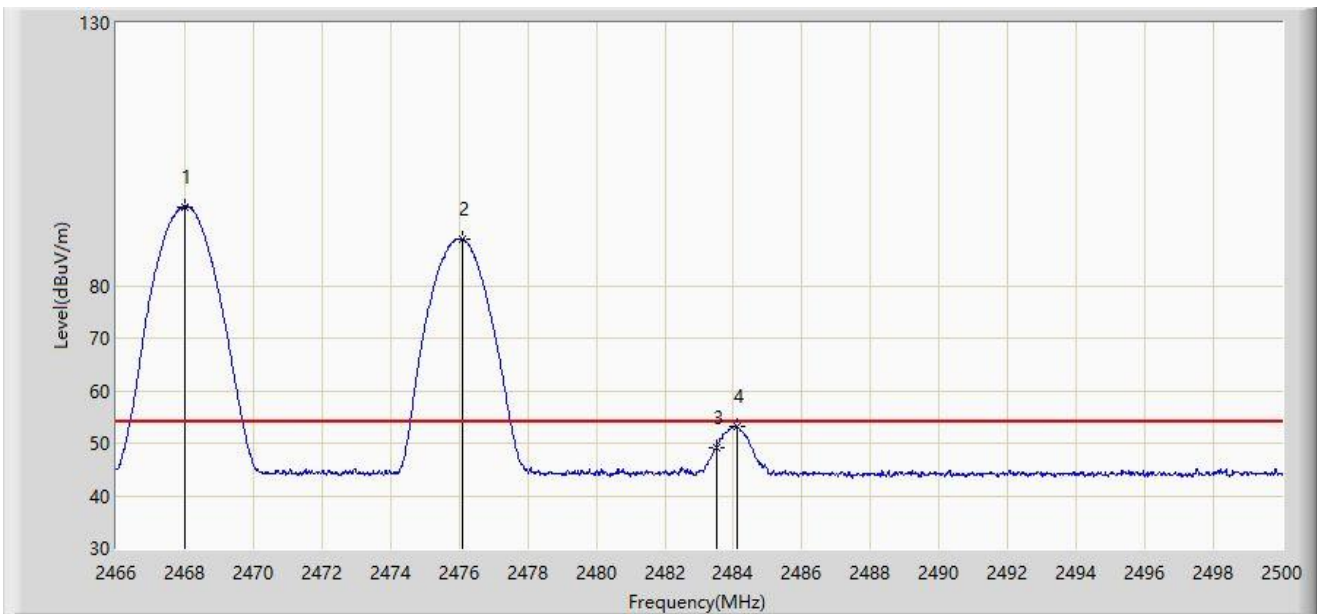


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2468.006	95.068	62.693	N/A	N/A	32.375	AV
2	*	2476.081	88.938	56.552	N/A	N/A	32.386	AV
3		2483.500	49.154	16.772	-4.846	54.000	32.382	AV
4		2484.088	53.316	20.934	-0.684	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2476MHz	

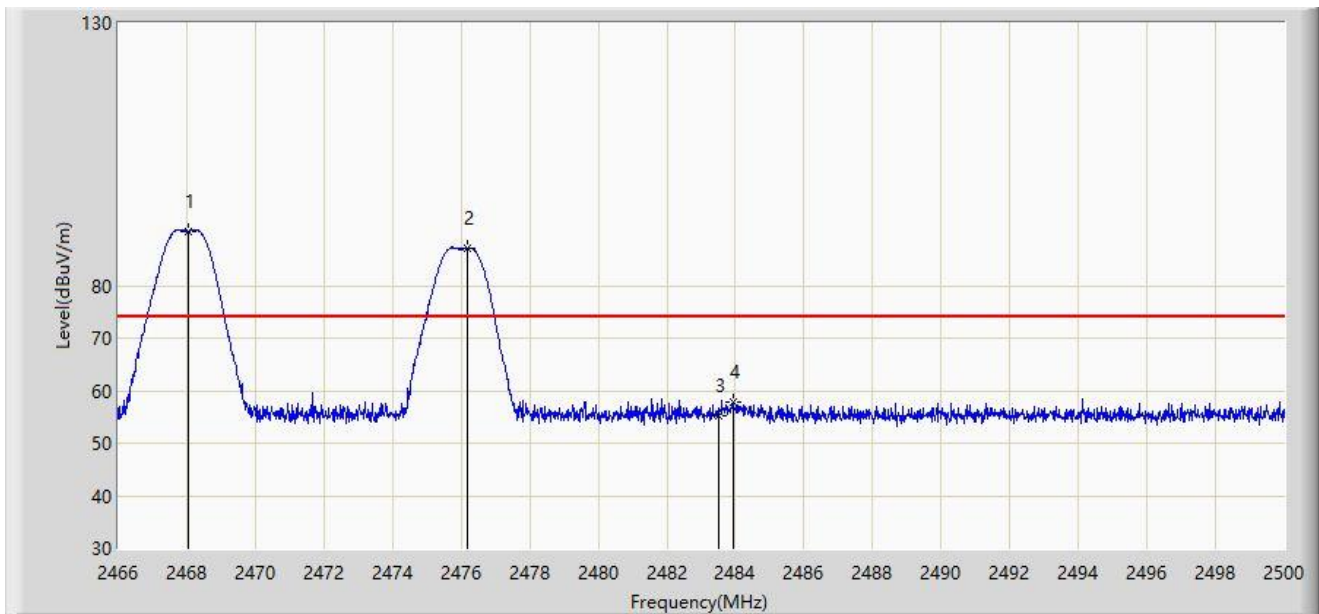


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2468.040	90.421	58.046	N/A	N/A	32.375	PK
2	*	2476.183	87.063	54.677	N/A	N/A	32.386	PK
3		2483.500	55.241	22.859	-18.759	74.000	32.382	PK
4		2483.935	57.916	25.534	-16.084	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2476MHz	

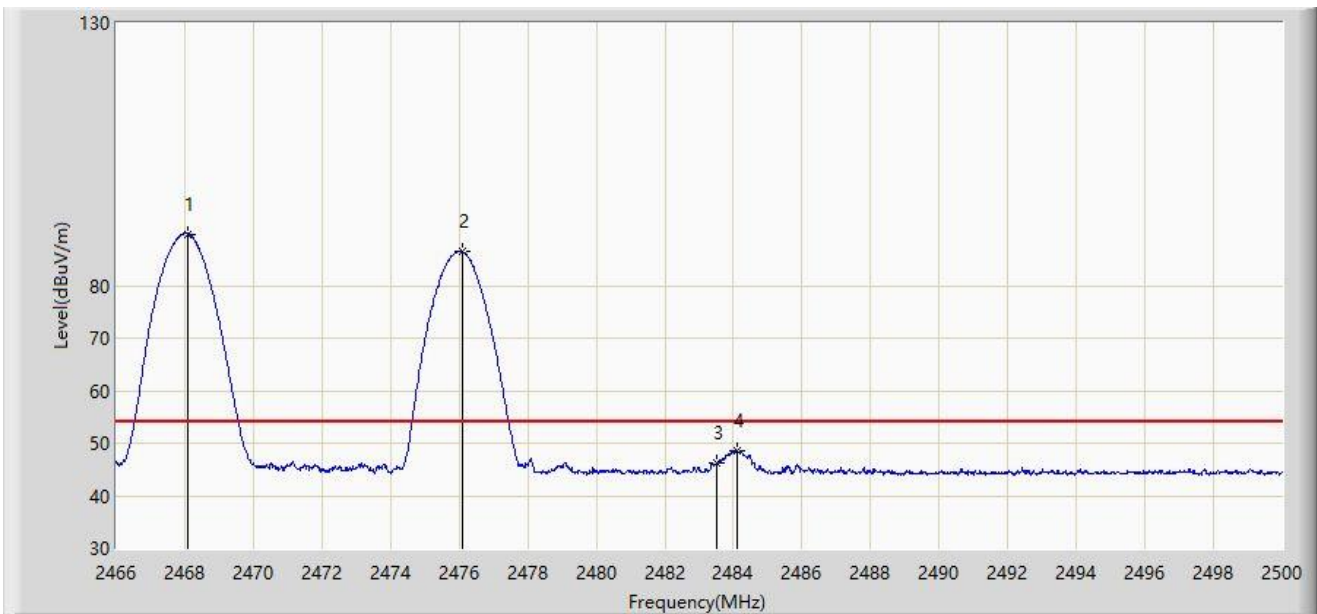


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2468.091	89.853	57.478	N/A	N/A	32.375	AV
2	*	2476.081	86.427	54.041	N/A	N/A	32.386	AV
3		2483.500	46.134	13.752	-7.866	54.000	32.382	AV
4		2484.088	48.662	16.280	-5.338	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2476MHz	

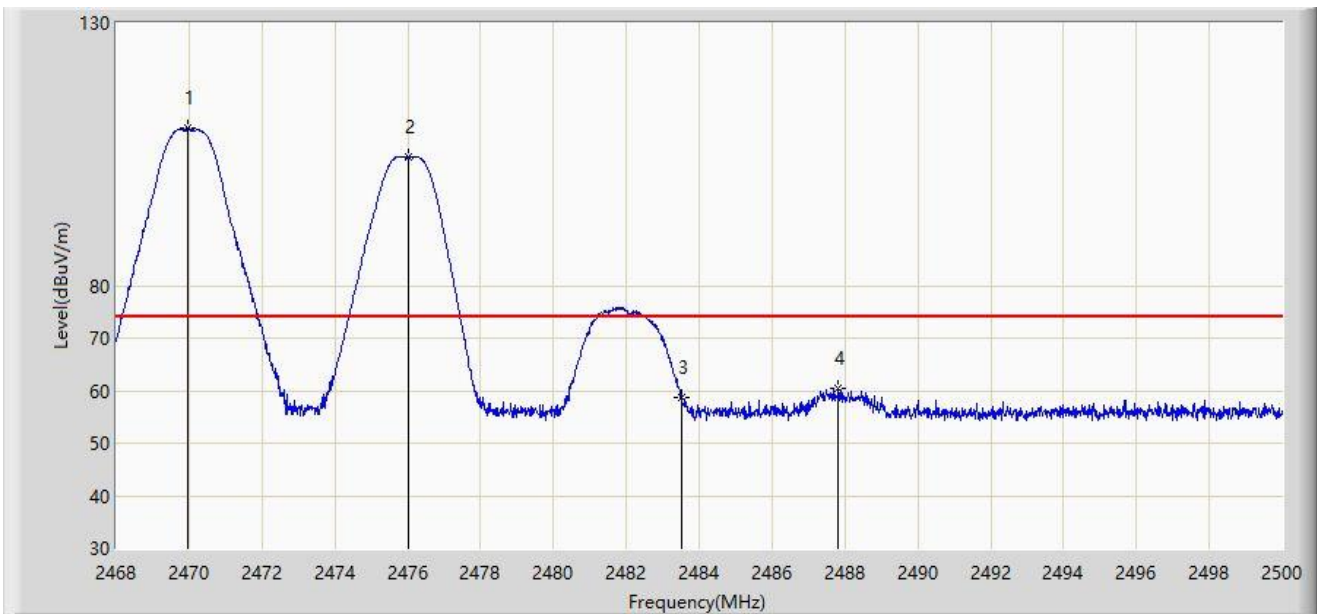


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.984	110.053	77.674	N/A	N/A	32.379	PK
2	*	2476.016	104.546	72.160	N/A	N/A	32.386	PK
3		2483.500	58.761	26.379	-15.239	74.000	32.382	PK
4		2487.808	60.342	27.962	-13.658	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2476MHz	

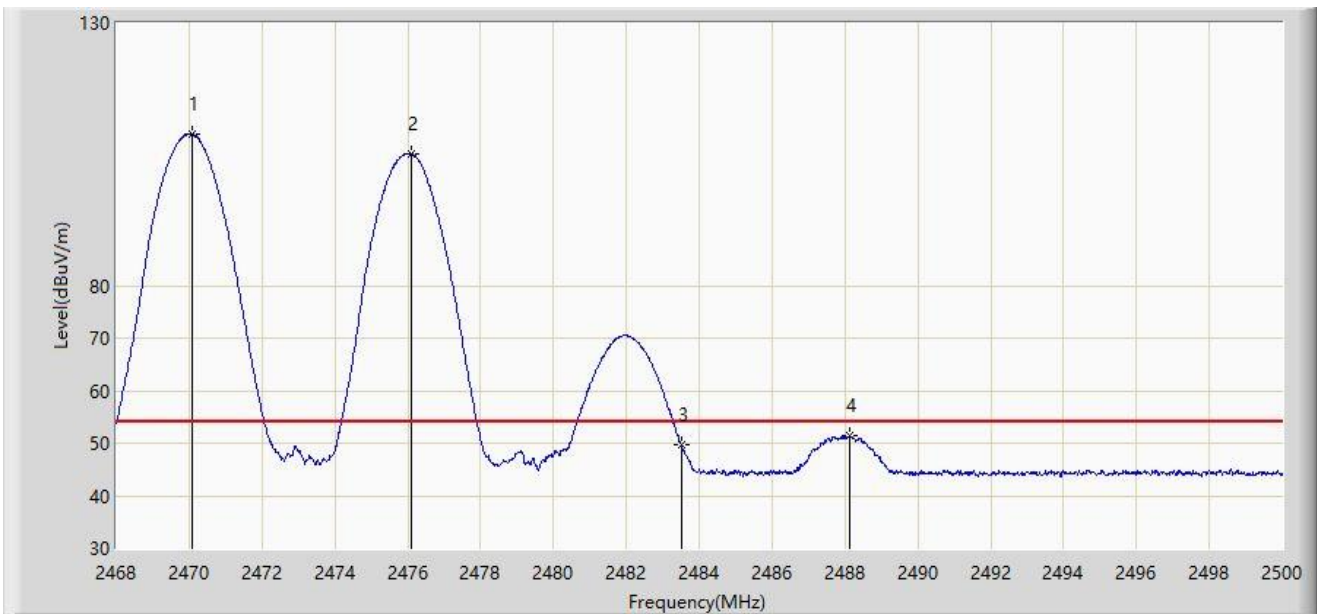


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2470.080	108.846	76.467	N/A	N/A	32.379	AV
2	*	2476.096	105.168	72.782	N/A	N/A	32.386	AV
3		2483.500	49.807	17.425	-4.193	54.000	32.382	AV
4		2488.128	51.476	19.096	-2.524	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2476MHz	

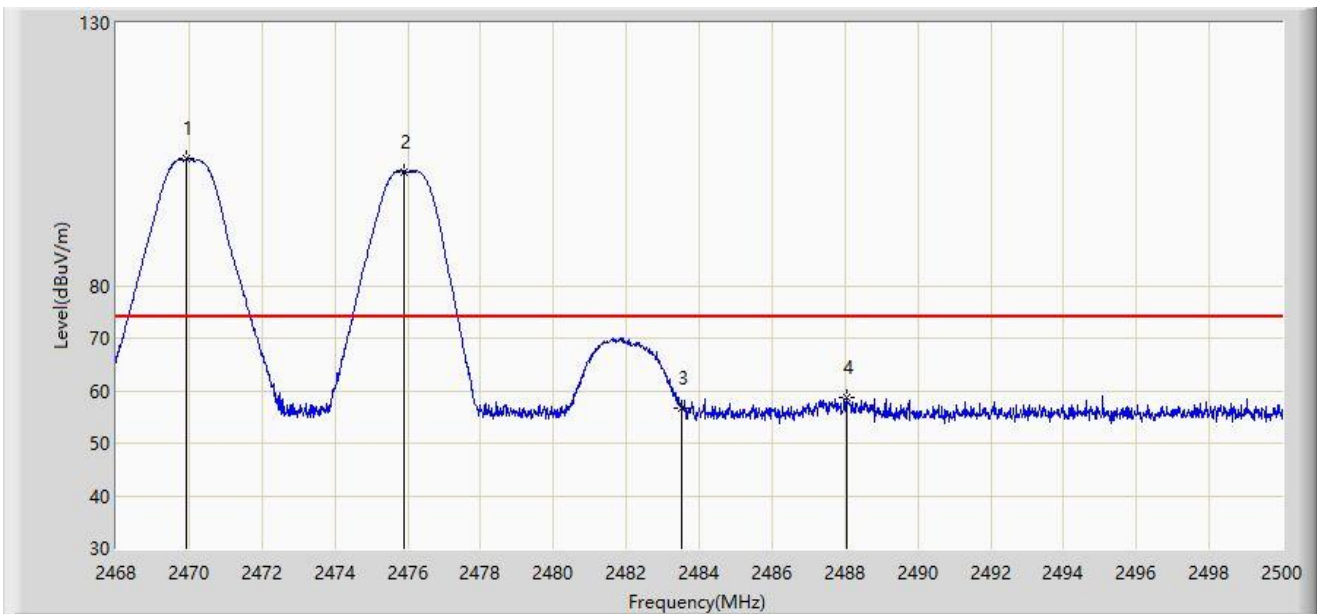


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2469.920	104.120	71.741	N/A	N/A	32.379	PK
2	*	2475.904	101.707	69.321	N/A	N/A	32.386	PK
3		2483.500	56.657	24.275	-17.343	74.000	32.382	PK
4		2488.032	58.672	26.292	-15.328	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2476MHz	

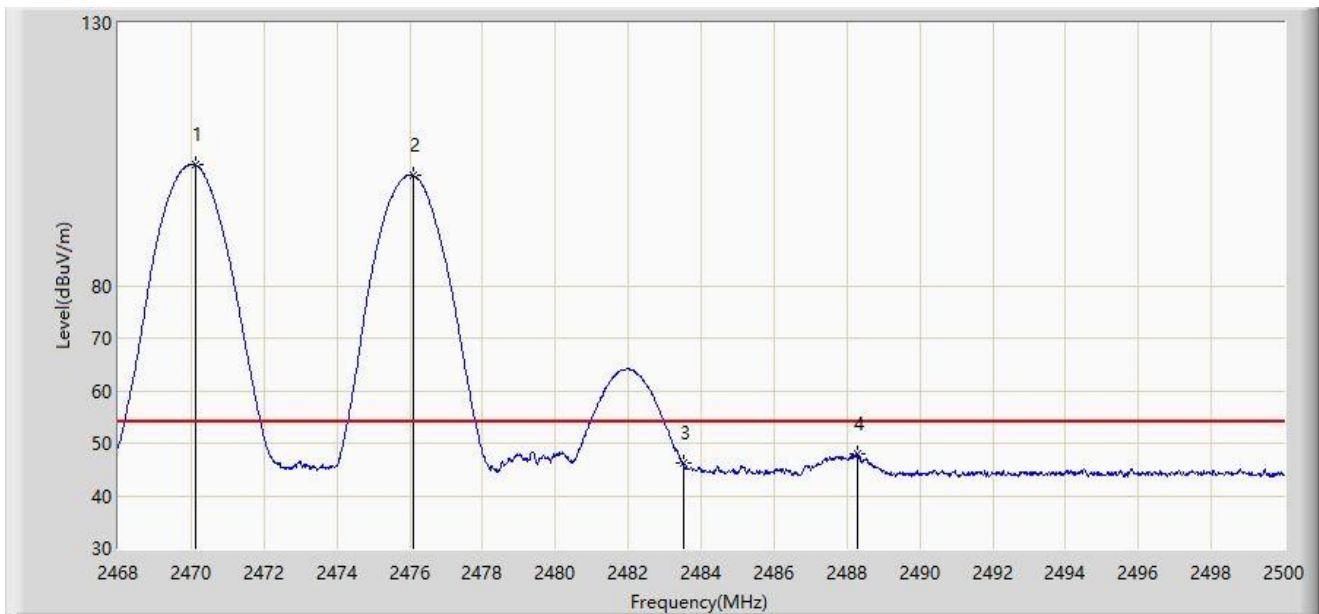


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.128	102.984	70.605	N/A	N/A	32.379	AV
2	*	2476.096	100.995	68.609	N/A	N/A	32.386	AV
3		2483.500	46.234	13.852	-7.766	54.000	32.382	AV
4		2488.272	48.066	15.686	-5.934	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2476MHz	

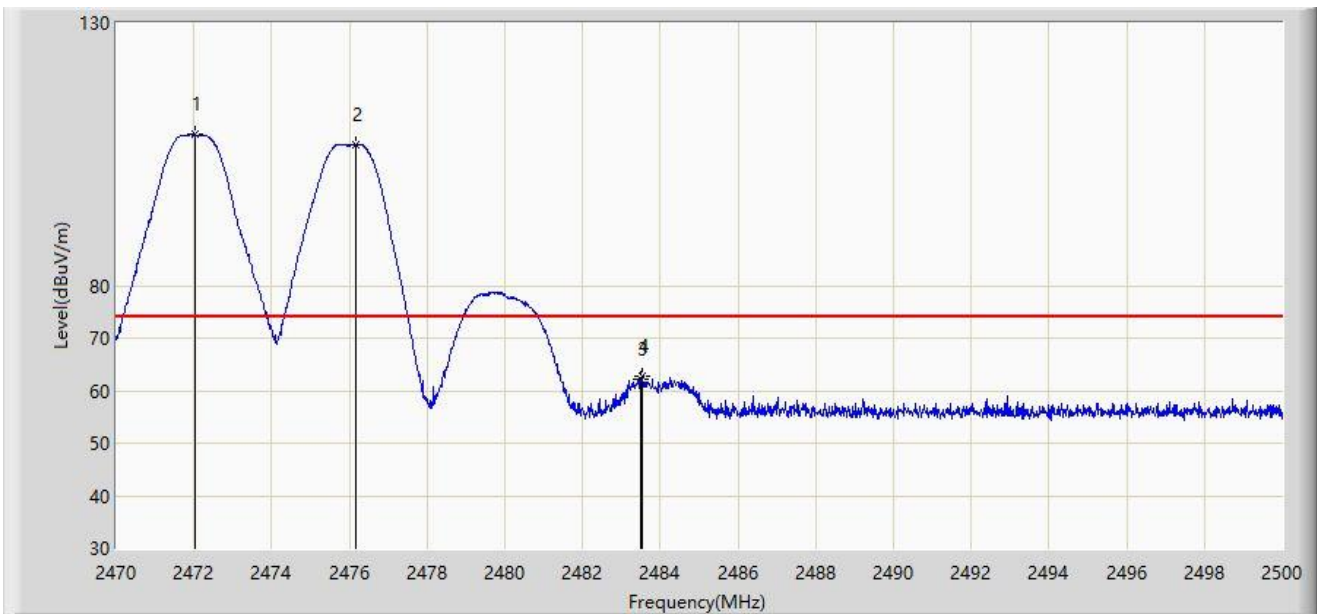


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2472.040	108.875	76.492	N/A	N/A	32.383	PK
2	*	2476.165	106.866	74.480	N/A	N/A	32.386	PK
3		2483.500	62.160	29.778	-11.840	74.000	32.382	PK
4		2483.545	62.776	30.394	-11.224	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2476MHz	

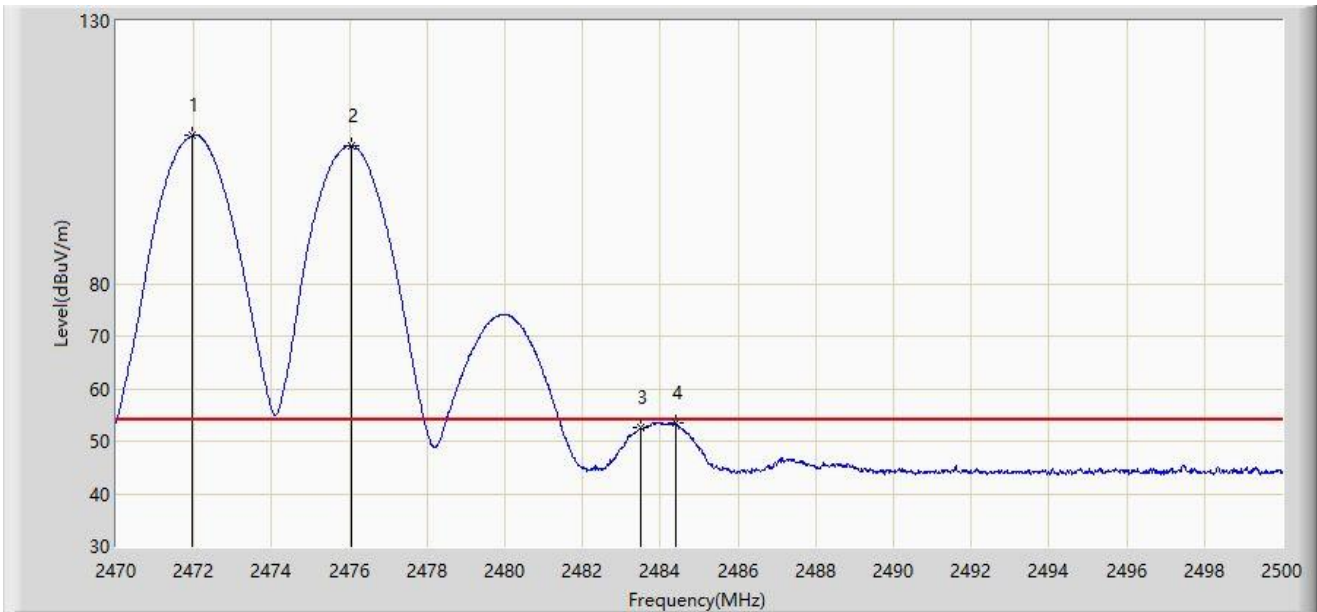


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2471.965	108.134	75.751	N/A	N/A	32.383	AV
2	*	2476.045	106.270	73.884	N/A	N/A	32.386	AV
3		2483.500	52.689	20.307	-1.311	54.000	32.382	AV
4		2484.400	53.523	21.141	-0.477	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2476MHz	

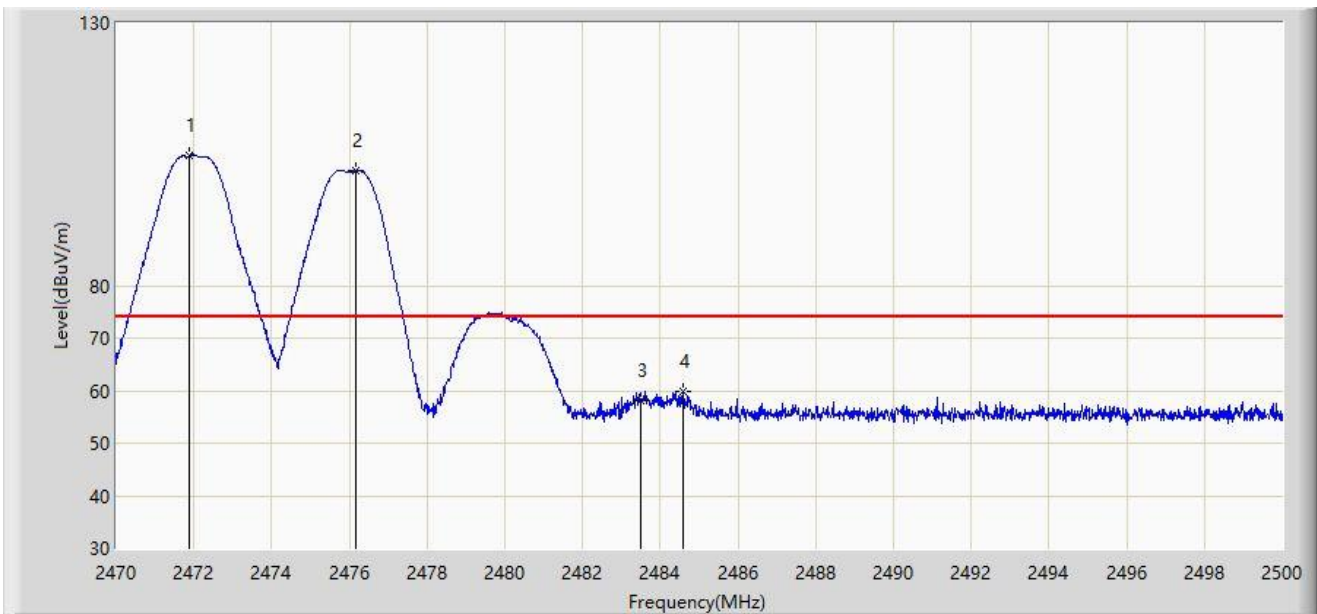


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2471.890	104.766	72.383	N/A	N/A	32.383	PK
2	*	2476.150	101.919	69.533	N/A	N/A	32.386	PK
3		2483.500	58.037	25.655	-15.963	74.000	32.382	PK
4		2484.595	59.801	27.419	-14.199	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2476MHz	

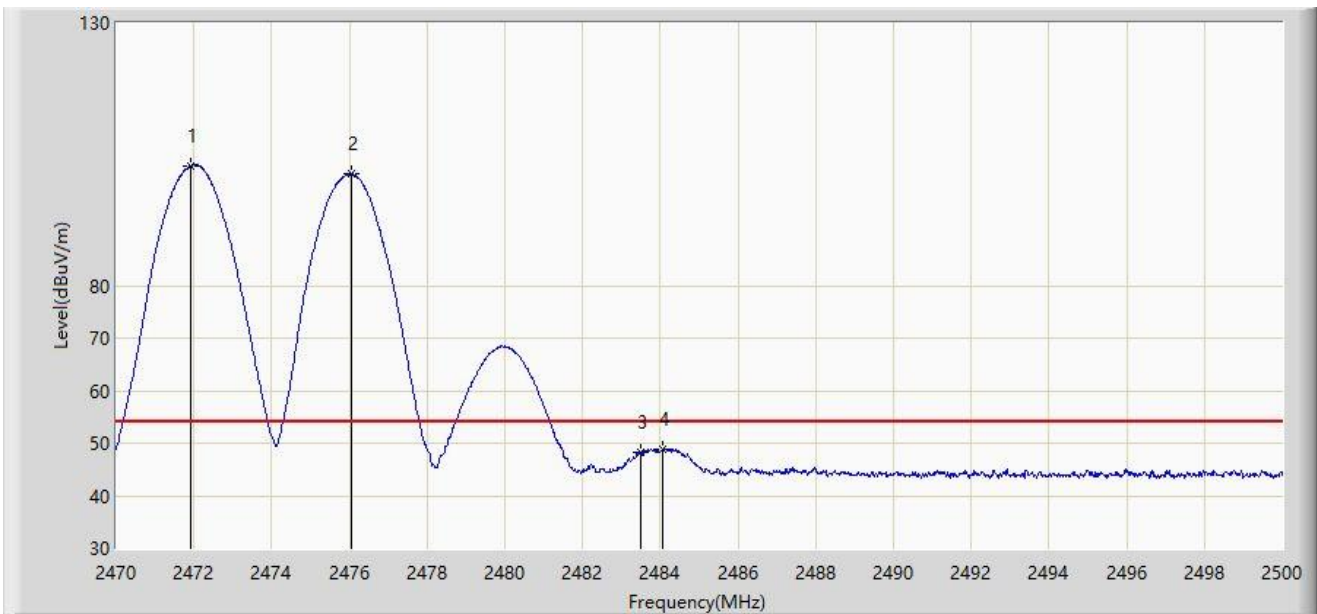


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2471.935	102.829	70.446	N/A	N/A	32.383	AV
2	*	2476.060	101.282	68.896	N/A	N/A	32.386	AV
3		2483.500	48.266	15.884	-5.734	54.000	32.382	AV
4		2484.055	48.879	16.497	-5.121	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2476MHz	

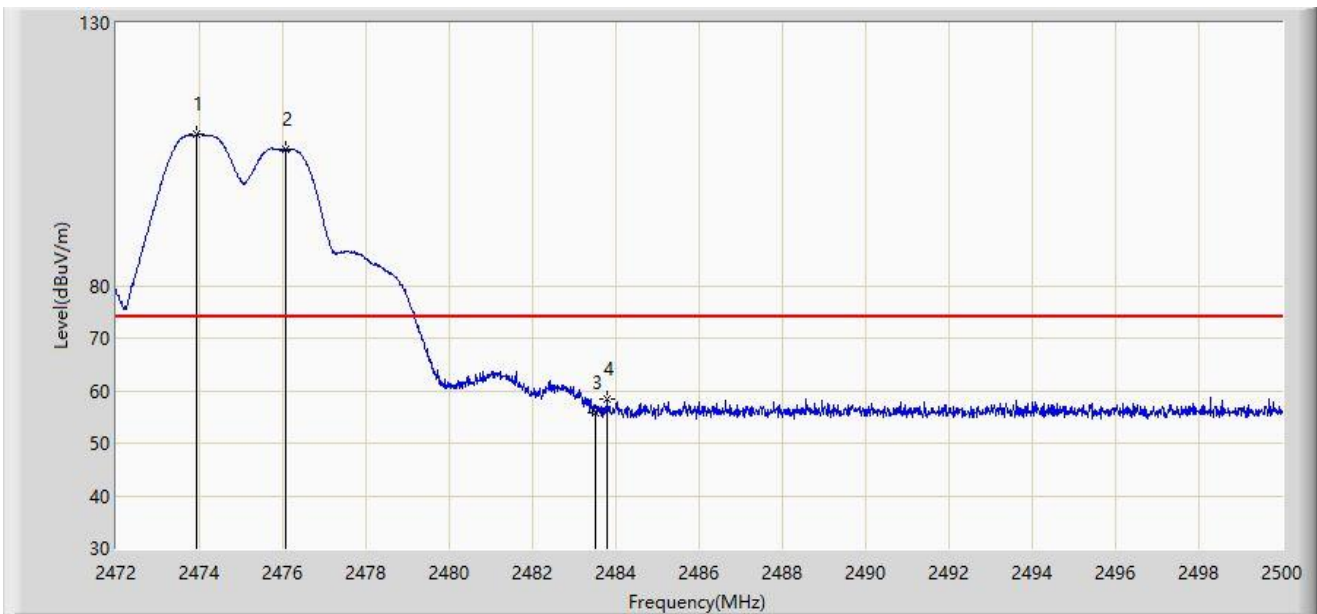


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2473.918	108.786	76.399	N/A	N/A	32.387	PK
2	*	2476.074	105.915	73.529	N/A	N/A	32.386	PK
3		2483.500	55.818	23.436	-18.182	74.000	32.382	PK
4		2483.802	58.276	25.894	-15.724	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2476MHz	

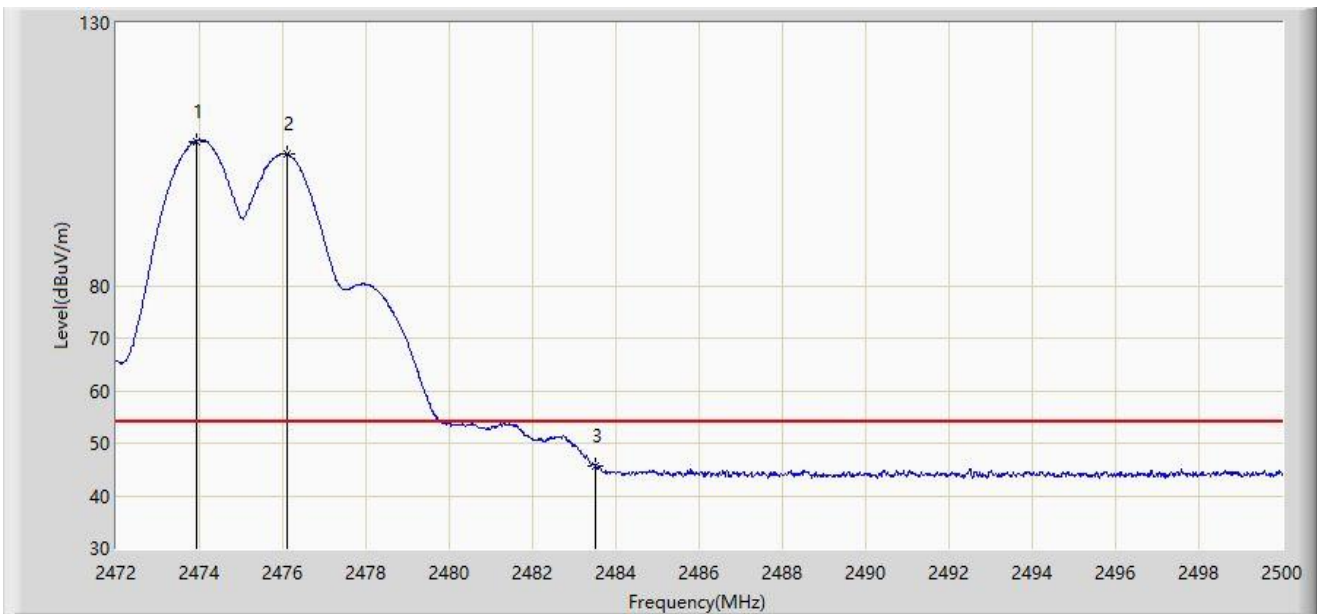


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2473.918	107.515	75.128	N/A	N/A	32.387	AV
2	*	2476.116	105.051	72.665	N/A	N/A	32.386	AV
3		2483.500	45.690	13.308	-8.310	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2476MHz	

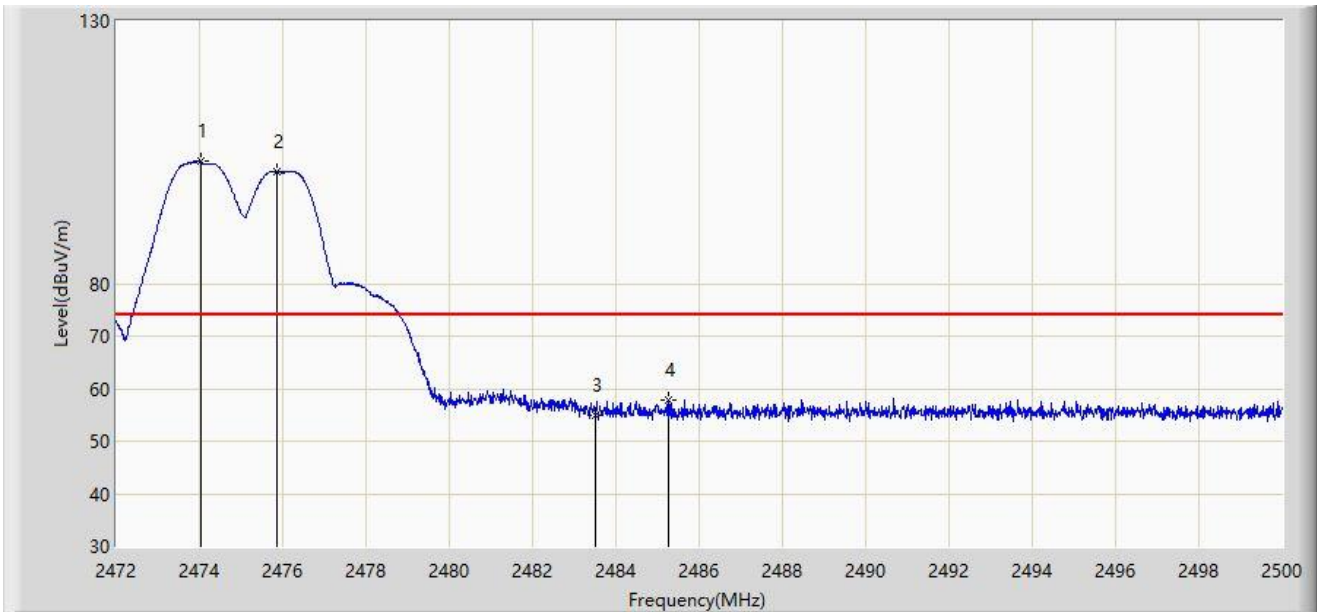


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2474.030	103.231	70.844	N/A	N/A	32.387	PK
2	*	2475.864	101.304	68.918	N/A	N/A	32.386	PK
3		2483.500	55.065	22.683	-18.935	74.000	32.382	PK
4		2485.258	57.885	25.503	-16.115	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2476MHz	

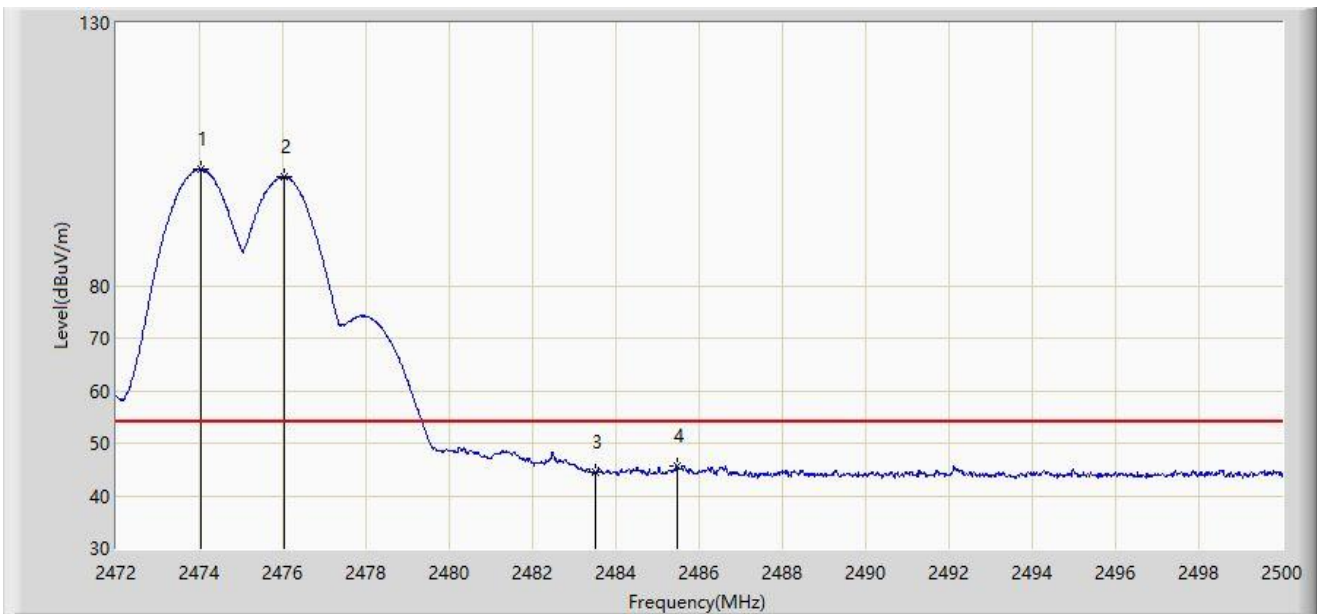


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.044	102.208	69.821	N/A	N/A	32.387	AV
2	*	2476.032	100.679	68.293	N/A	N/A	32.386	AV
3		2483.500	44.364	11.982	-9.636	54.000	32.382	AV
4		2485.468	45.742	13.361	-8.258	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2476MHz	

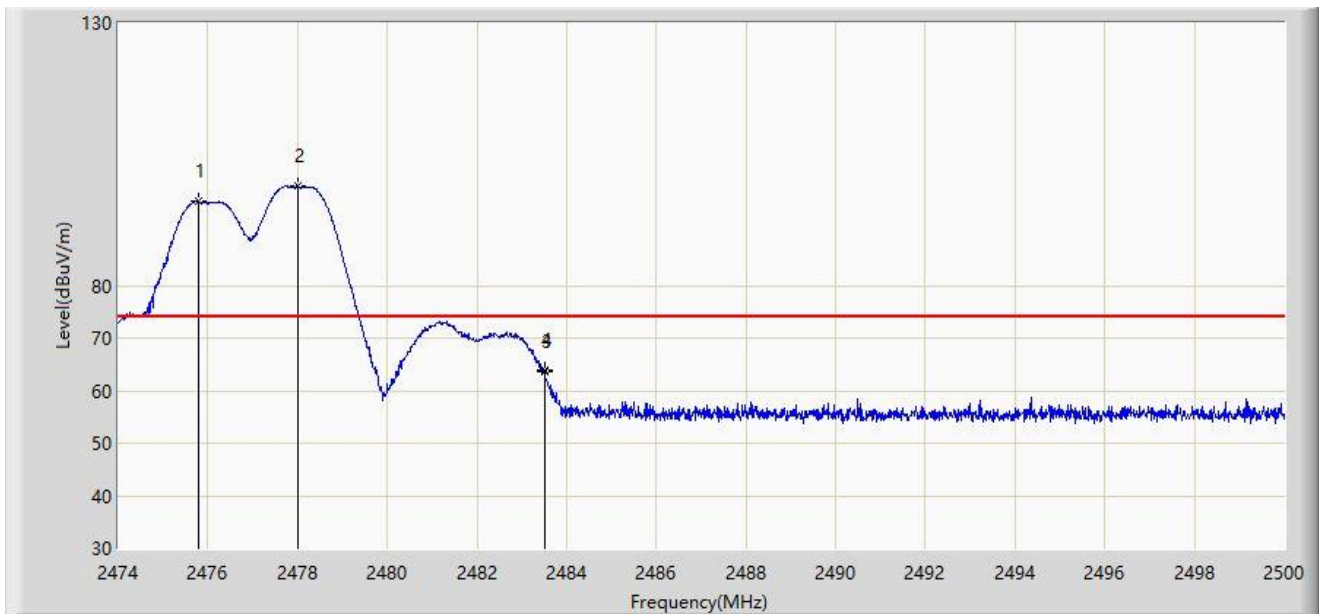


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2475.781	96.001	63.615	N/A	N/A	32.386	PK
2		2478.004	98.861	66.476	N/A	N/A	32.385	PK
3		2483.500	63.736	31.354	-10.264	74.000	32.382	PK
4		2483.503	63.874	31.492	-10.126	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2476MHz	

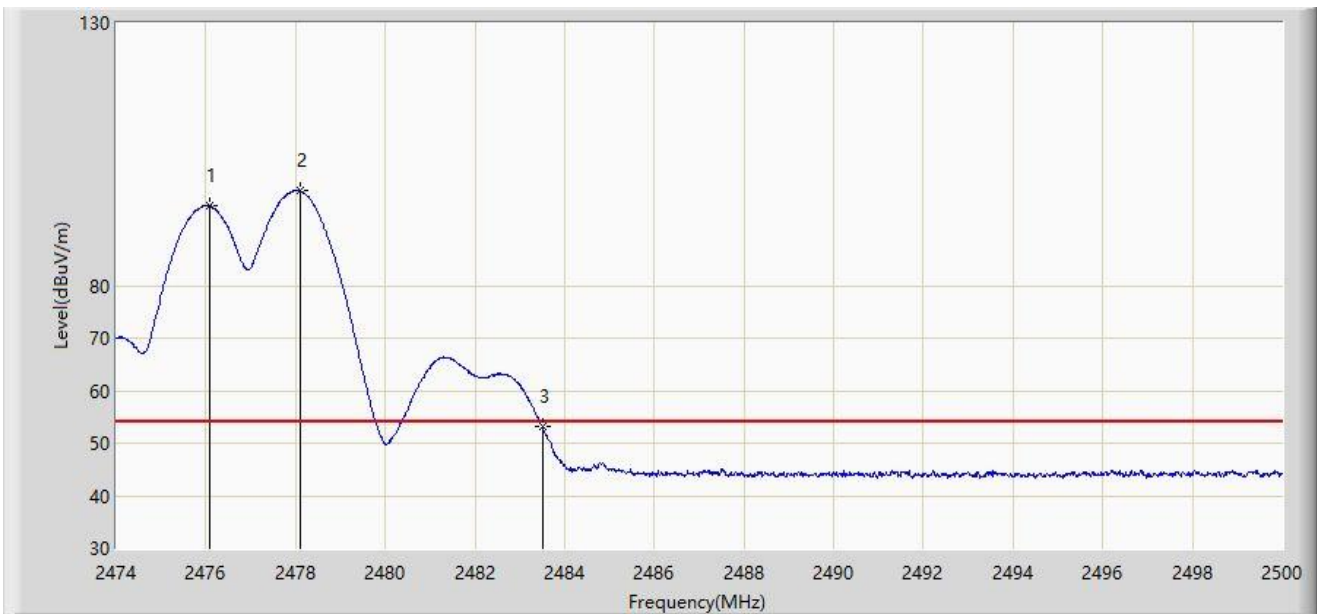


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2476.093	95.097	62.711	N/A	N/A	32.386	AV
2		2478.108	98.016	65.631	N/A	N/A	32.385	AV
3		2483.500	53.317	20.935	-0.683	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2476MHz	

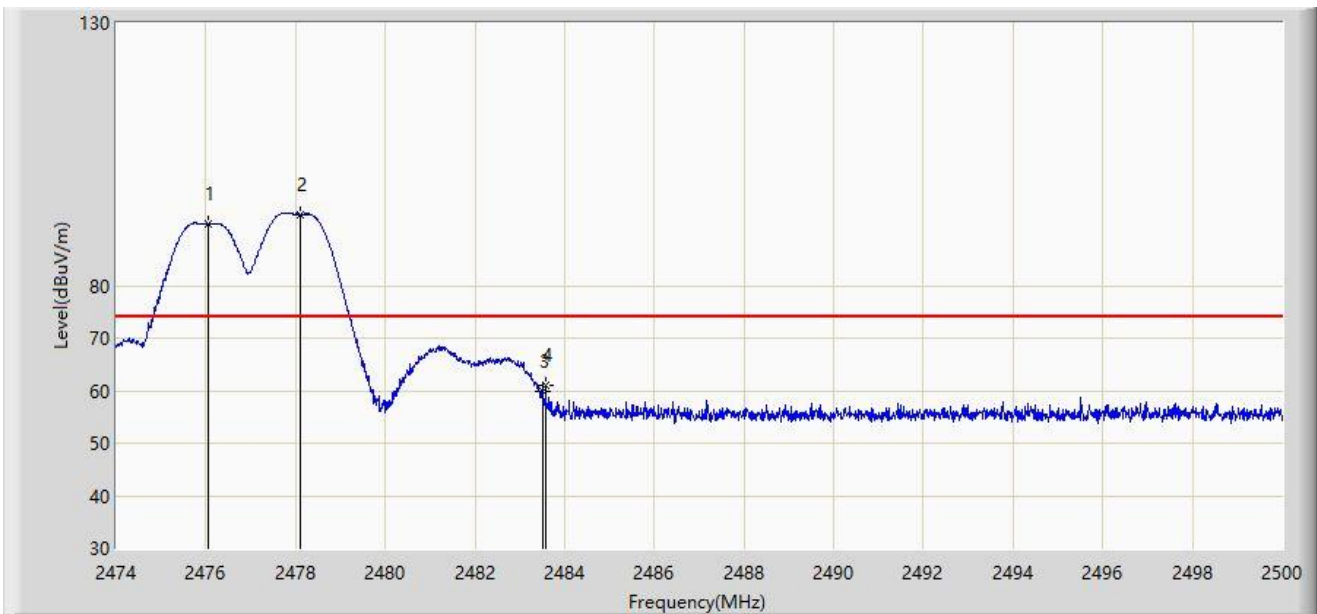


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2476.054	91.661	59.275	N/A	N/A	32.386	PK
2		2478.108	93.561	61.176	N/A	N/A	32.385	PK
3		2483.500	59.717	27.335	-14.283	74.000	32.382	PK
4		2483.581	60.939	28.557	-13.061	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2476MHz	

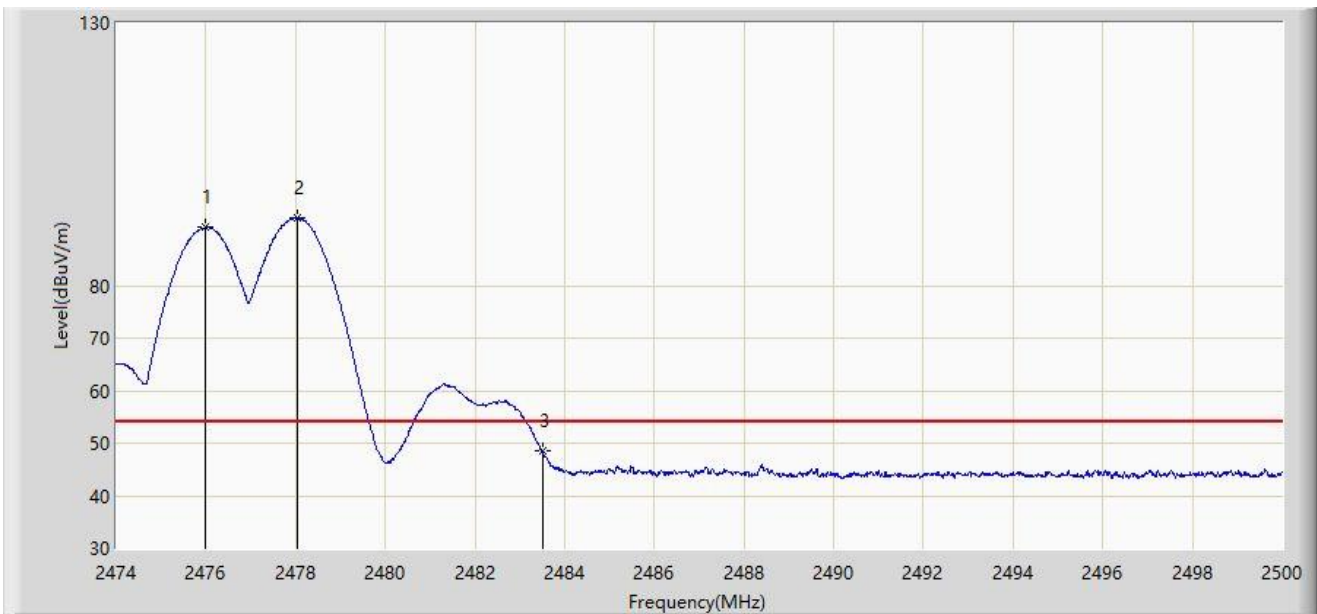


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2475.976	91.043	58.657	N/A	N/A	32.386	AV
2		2478.030	92.895	60.510	N/A	N/A	32.385	AV
3		2483.500	48.518	16.136	-5.482	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

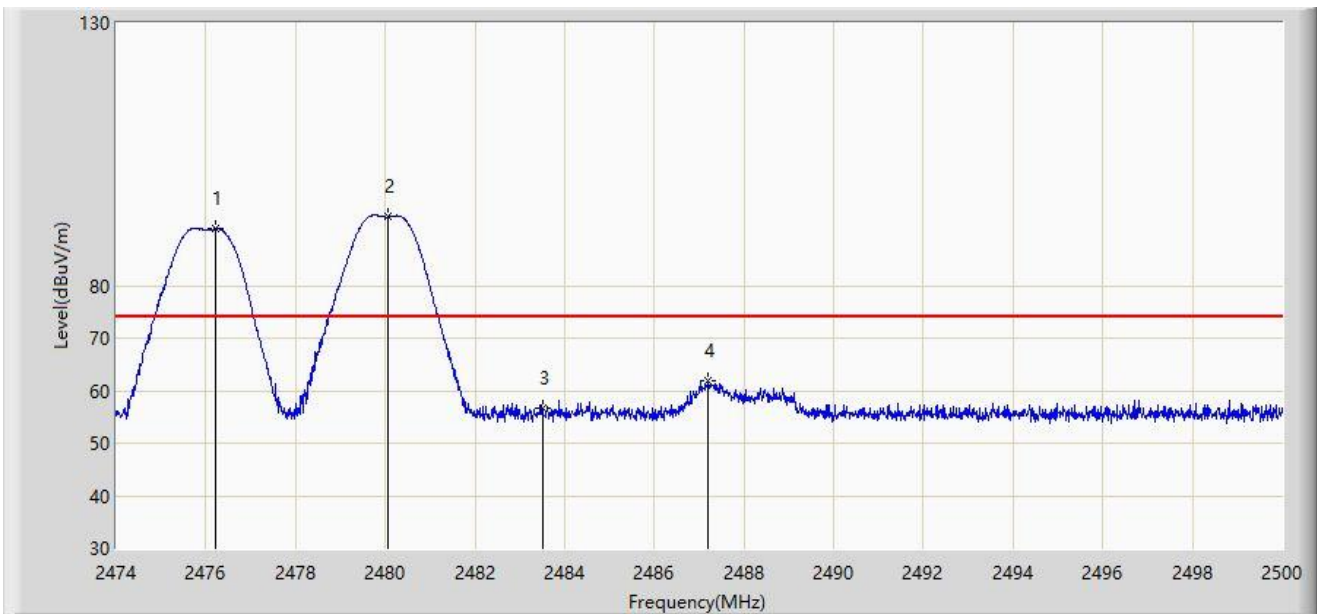


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2476.210	90.759	58.373	N/A	N/A	32.386	PK
2		2480.058	93.203	60.819	N/A	N/A	32.384	PK
3		2483.500	56.583	24.201	-17.417	74.000	32.382	PK
4		2487.208	61.910	29.529	-12.090	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

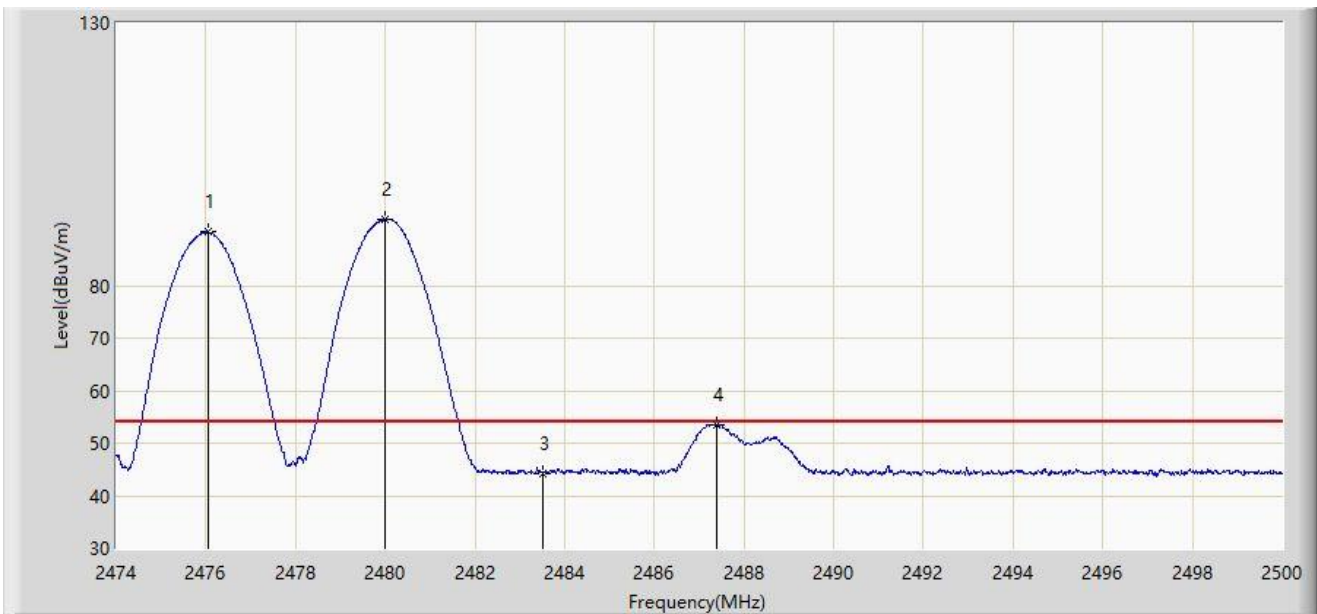


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2476.054	90.174	57.788	N/A	N/A	32.386	AV
2		2479.980	92.593	60.209	N/A	N/A	32.384	AV
3		2483.500	44.255	11.873	-9.745	54.000	32.382	AV
4		2487.390	53.561	21.180	-0.439	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

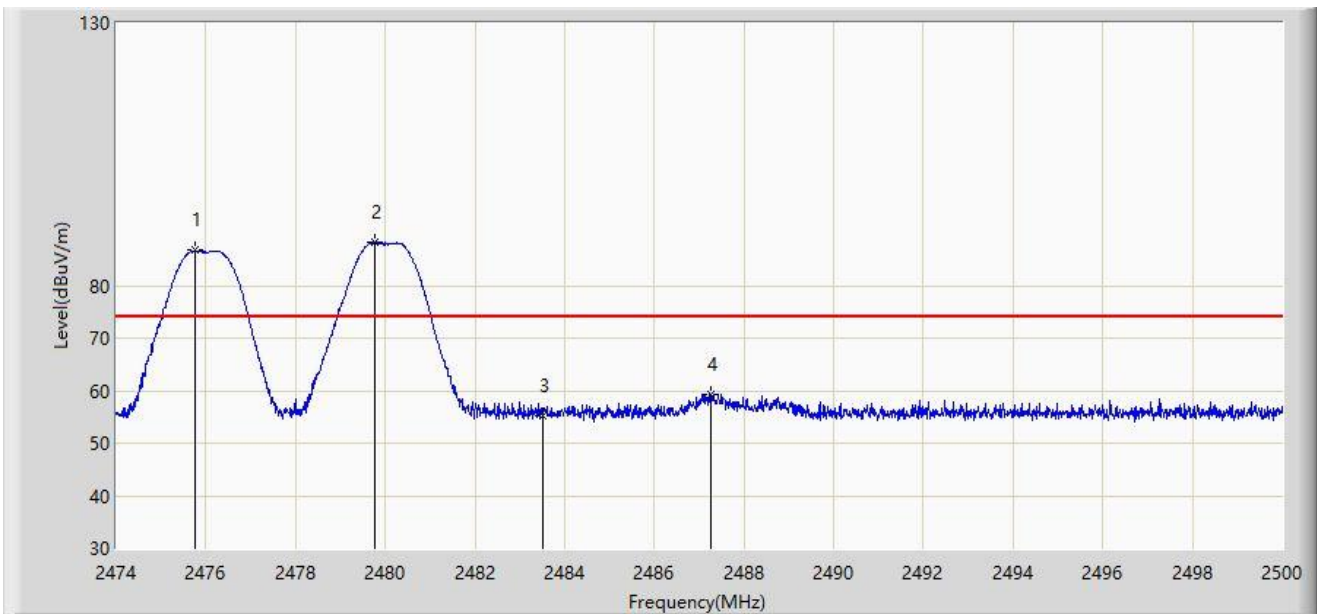


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2475.768	86.686	54.300	N/A	N/A	32.386	PK
2		2479.772	88.239	55.855	N/A	N/A	32.384	PK
3		2483.500	55.362	22.980	-18.638	74.000	32.382	PK
4		2487.273	59.376	26.995	-14.624	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

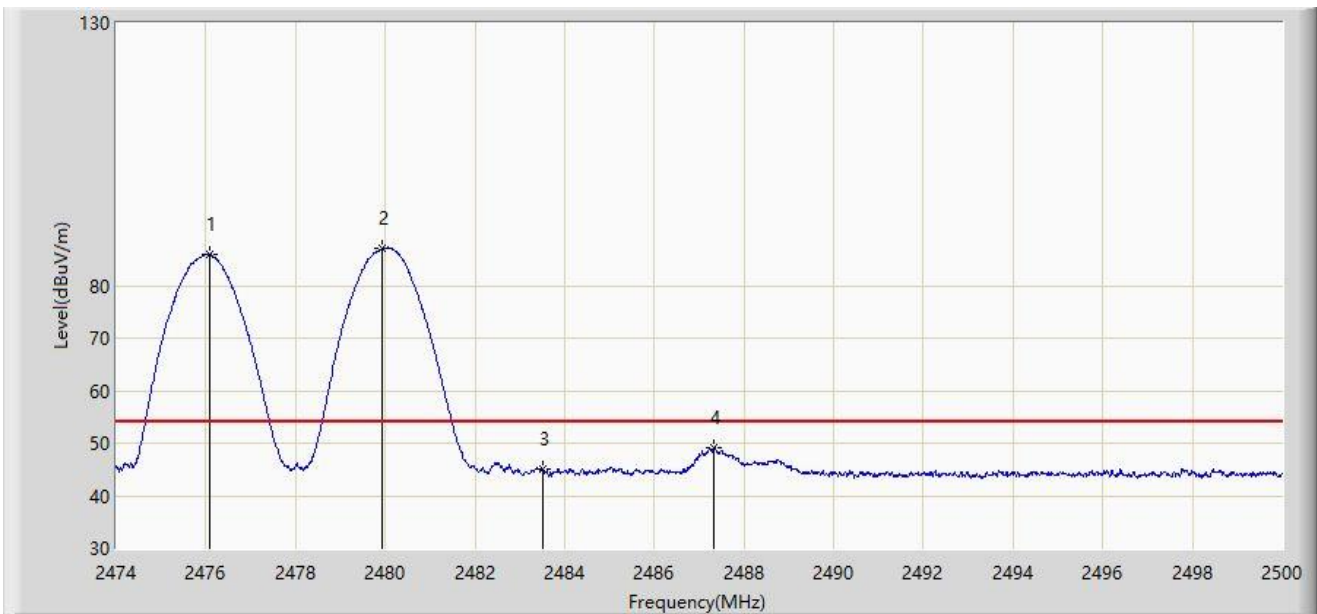


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2476.093	85.806	53.420	N/A	N/A	32.386	AV
2		2479.928	87.074	54.690	N/A	N/A	32.384	AV
3		2483.500	45.098	12.716	-8.902	54.000	32.382	AV
4		2487.338	49.194	16.813	-4.806	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2478MHz	

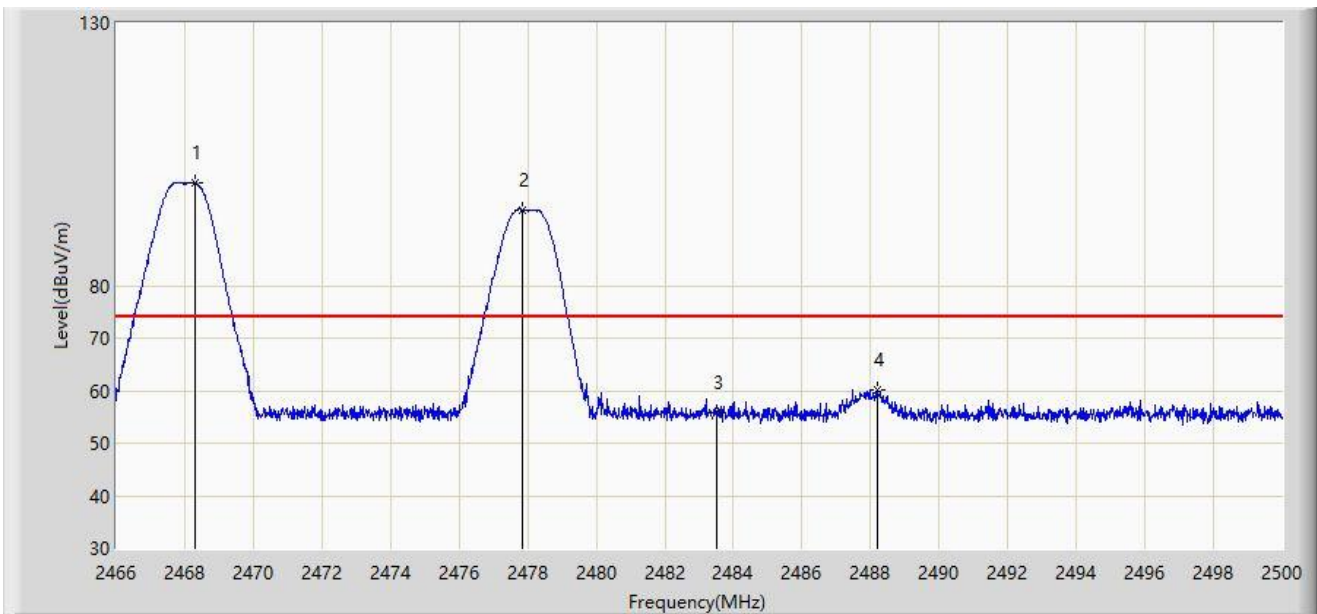


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2468.312	99.559	67.184	N/A	N/A	32.376	PK
2	*	2477.849	94.465	62.080	N/A	N/A	32.385	PK
3		2483.500	55.875	23.493	-18.125	74.000	32.382	PK
4		2488.219	60.210	27.830	-13.790	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2478MHz	

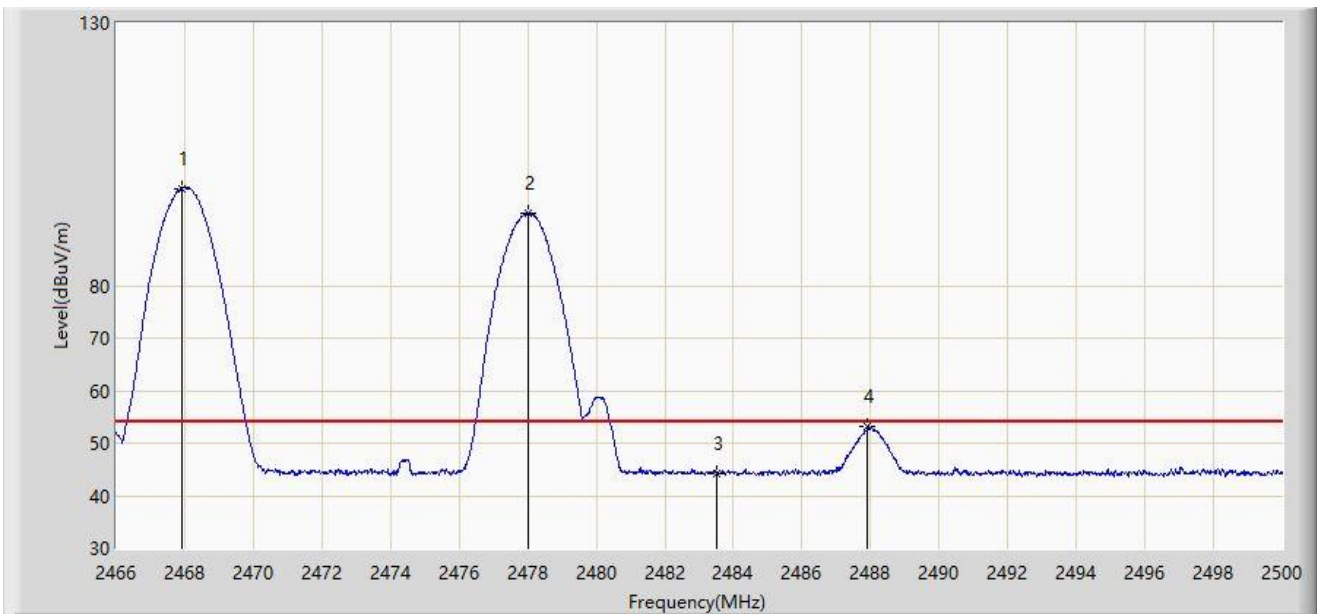


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2467.921	98.521	66.146	N/A	N/A	32.375	AV
2	*	2478.036	93.831	61.446	N/A	N/A	32.385	AV
3		2483.500	44.313	11.931	-9.687	54.000	32.382	AV
4		2487.913	53.211	20.831	-0.789	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2478MHz	

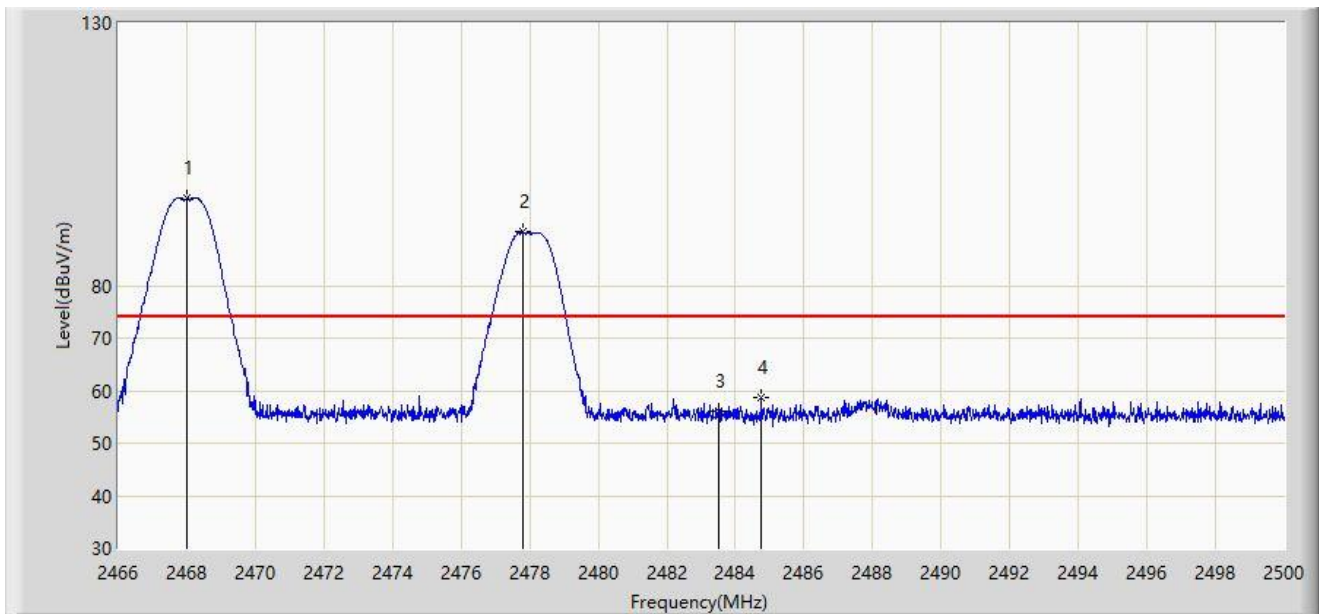


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2468.023	96.643	64.268	N/A	N/A	32.375	PK
2	*	2477.781	90.184	57.799	N/A	N/A	32.385	PK
3		2483.500	56.042	23.660	-17.958	74.000	32.382	PK
4		2484.768	58.832	26.450	-15.168	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2478MHz	

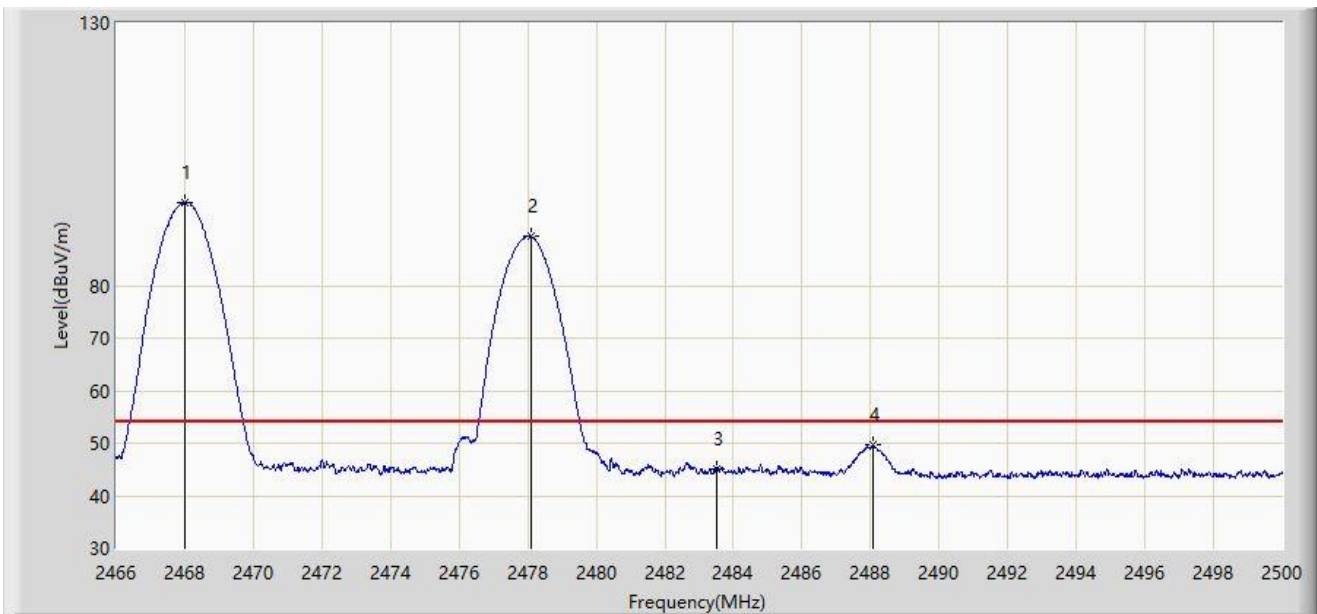


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2467.989	95.764	63.389	N/A	N/A	32.375	AV
2	*	2478.087	89.343	56.958	N/A	N/A	32.385	AV
3		2483.500	45.174	12.792	-8.826	54.000	32.382	AV
4		2488.049	49.574	17.194	-4.426	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2478MHz	

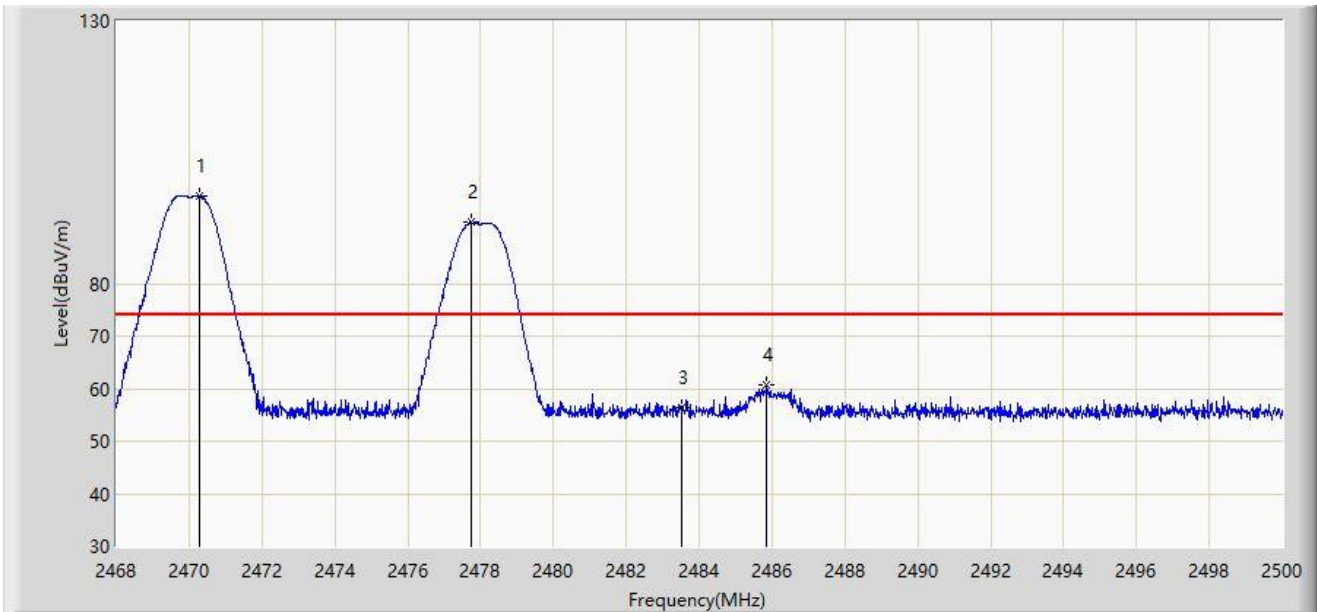


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.272	96.642	64.263	N/A	N/A	32.380	PK
2	*	2477.728	91.657	59.272	N/A	N/A	32.385	PK
3		2483.500	56.449	24.067	-17.551	74.000	32.382	PK
4		2485.856	60.718	28.337	-13.282	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2478MHz	

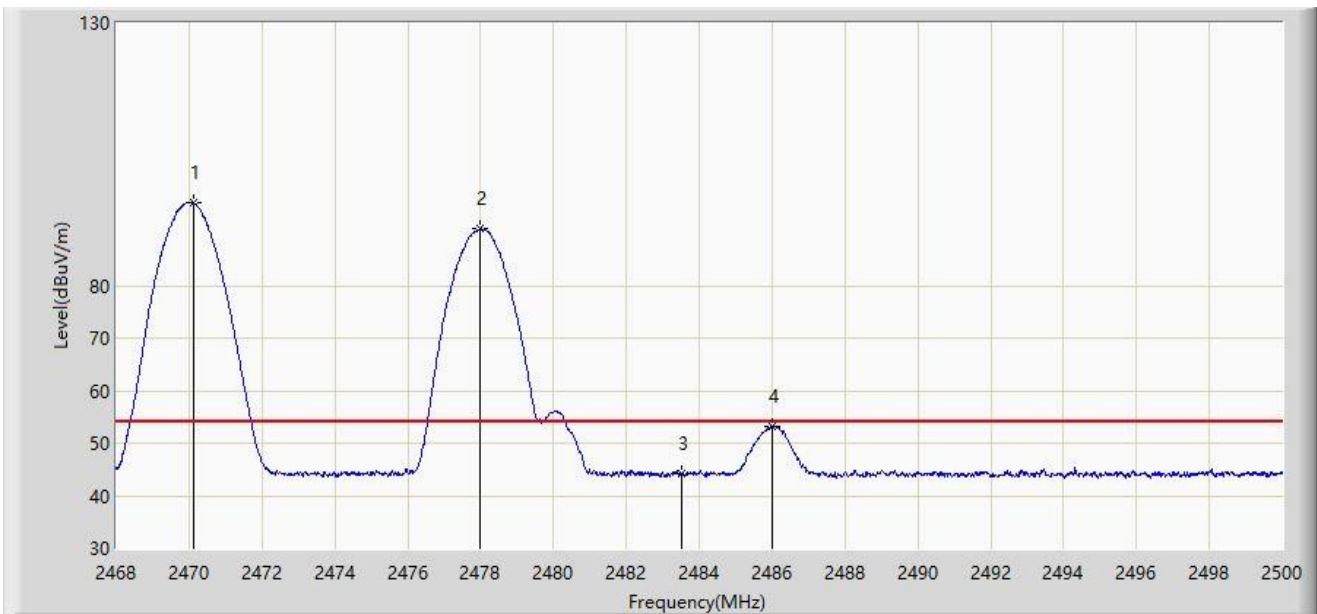


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.128	95.684	63.305	N/A	N/A	32.379	AV
2	*	2477.984	90.752	58.367	N/A	N/A	32.385	AV
3		2483.500	44.287	11.905	-9.713	54.000	32.382	AV
4		2486.000	53.241	20.860	-0.759	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2478MHz	

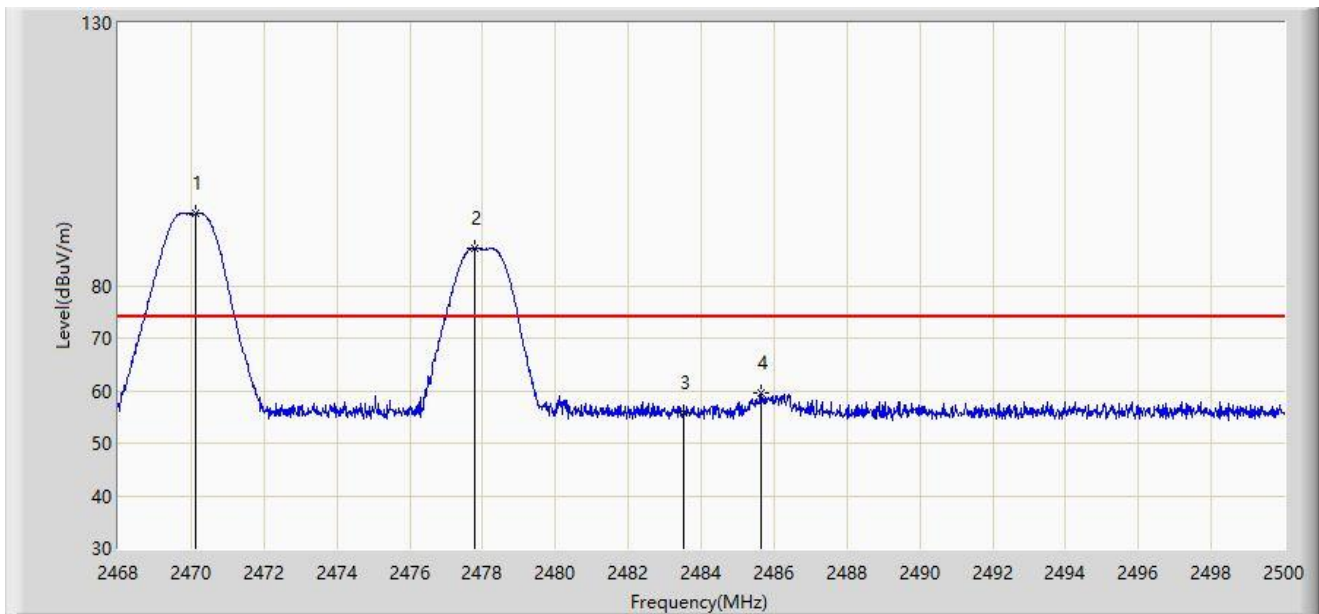


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.128	93.647	61.268	N/A	N/A	32.379	PK
2	*	2477.792	87.104	54.719	N/A	N/A	32.385	PK
3		2483.500	55.899	23.517	-18.101	74.000	32.382	PK
4		2485.632	59.525	27.144	-14.475	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2478MHz	

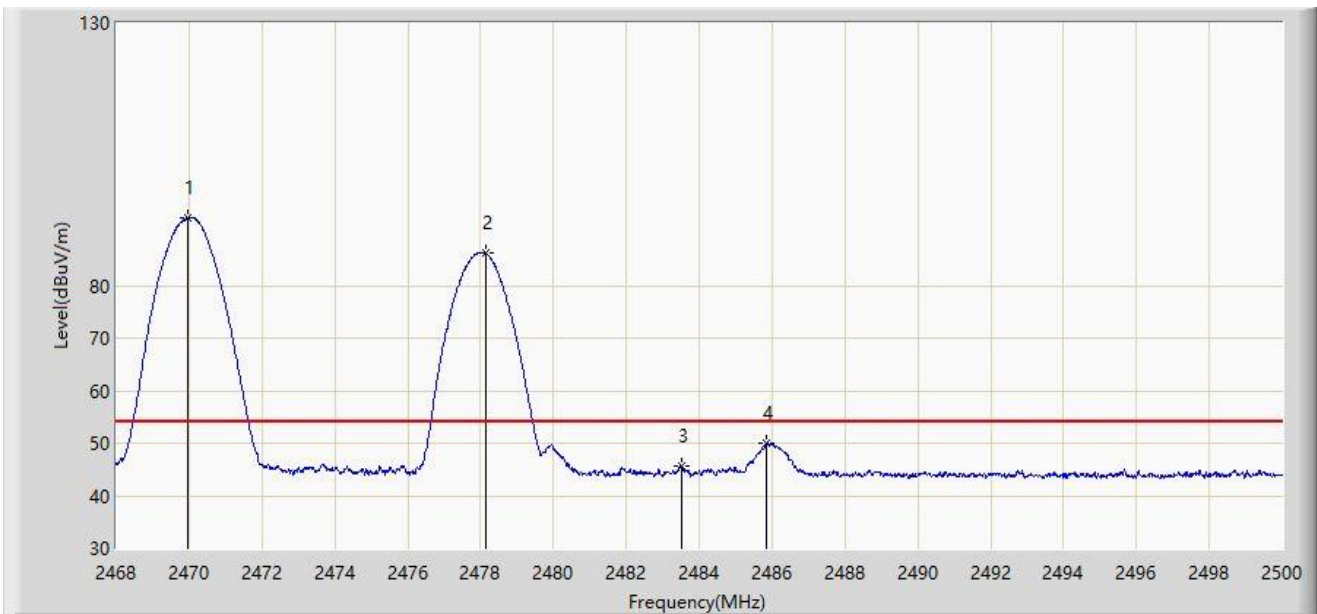


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.968	92.891	60.512	N/A	N/A	32.379	AV
2	*	2478.128	86.236	53.851	N/A	N/A	32.385	AV
3		2483.500	45.674	13.292	-8.326	54.000	32.382	AV
4		2485.856	49.950	17.569	-4.050	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2478MHz	

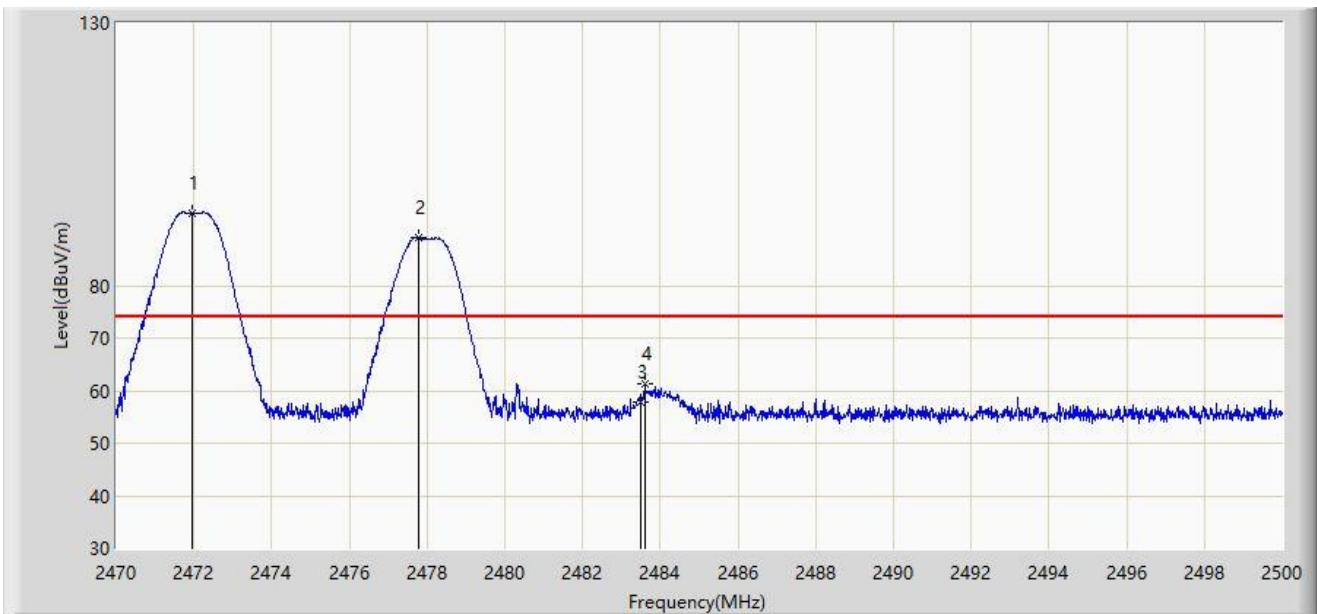


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2471.950	93.855	61.472	N/A	N/A	32.383	PK
2	*	2477.770	89.210	56.825	N/A	N/A	32.385	PK
3		2483.500	57.691	25.309	-16.309	74.000	32.382	PK
4		2483.605	61.347	28.965	-12.653	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2478MHz	

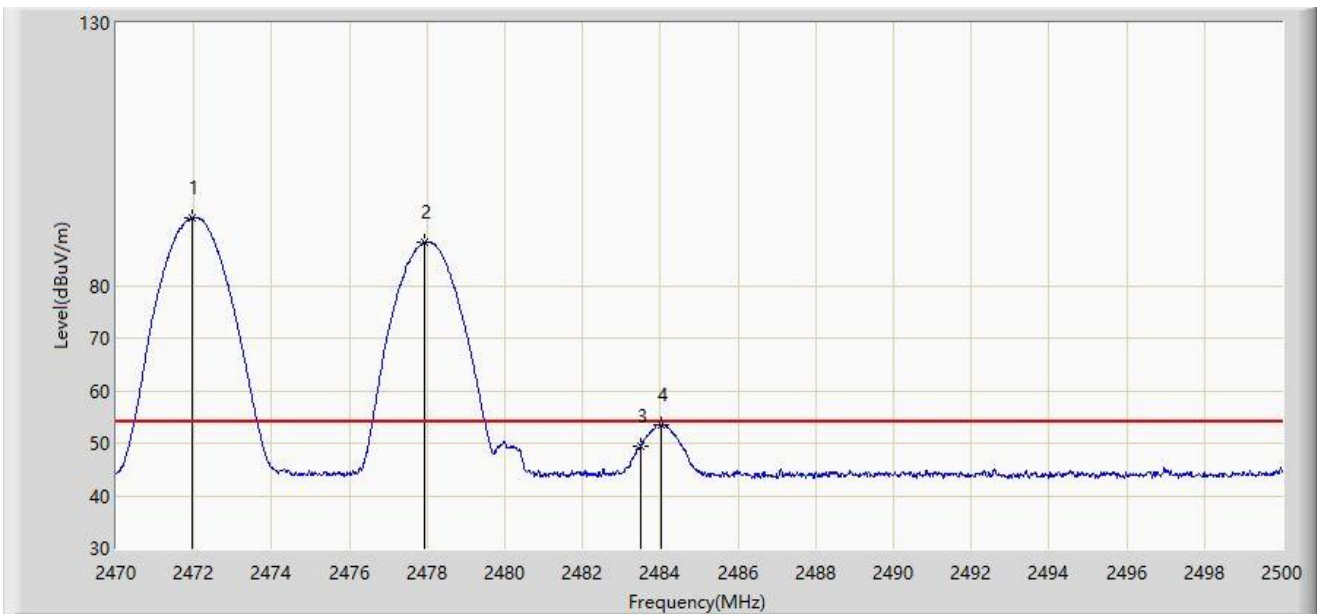


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2471.965	92.941	60.558	N/A	N/A	32.383	AV
2	*	2477.950	88.267	55.882	N/A	N/A	32.385	AV
3		2483.500	49.498	17.116	-4.502	54.000	32.382	AV
4		2484.040	53.556	21.174	-0.444	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2478MHz	

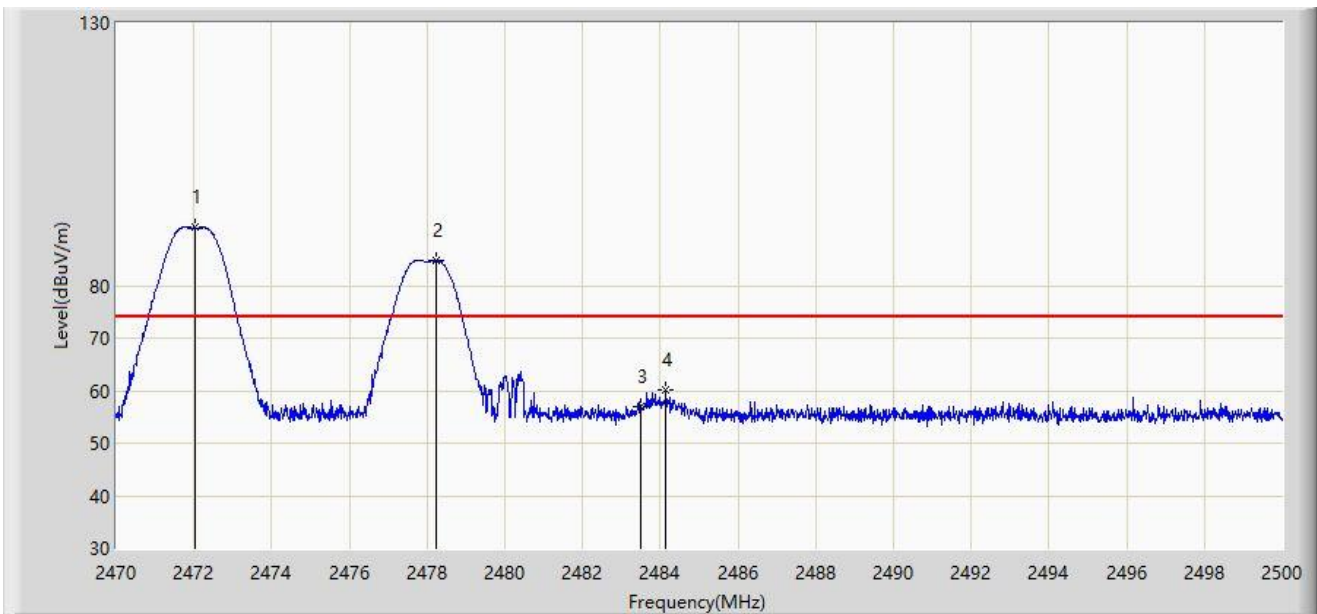


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2472.025	91.051	58.668	N/A	N/A	32.383	PK
2	*	2478.250	84.889	52.504	N/A	N/A	32.385	PK
3		2483.500	56.973	24.591	-17.027	74.000	32.382	PK
4		2484.145	60.258	27.876	-13.742	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2478MHz	

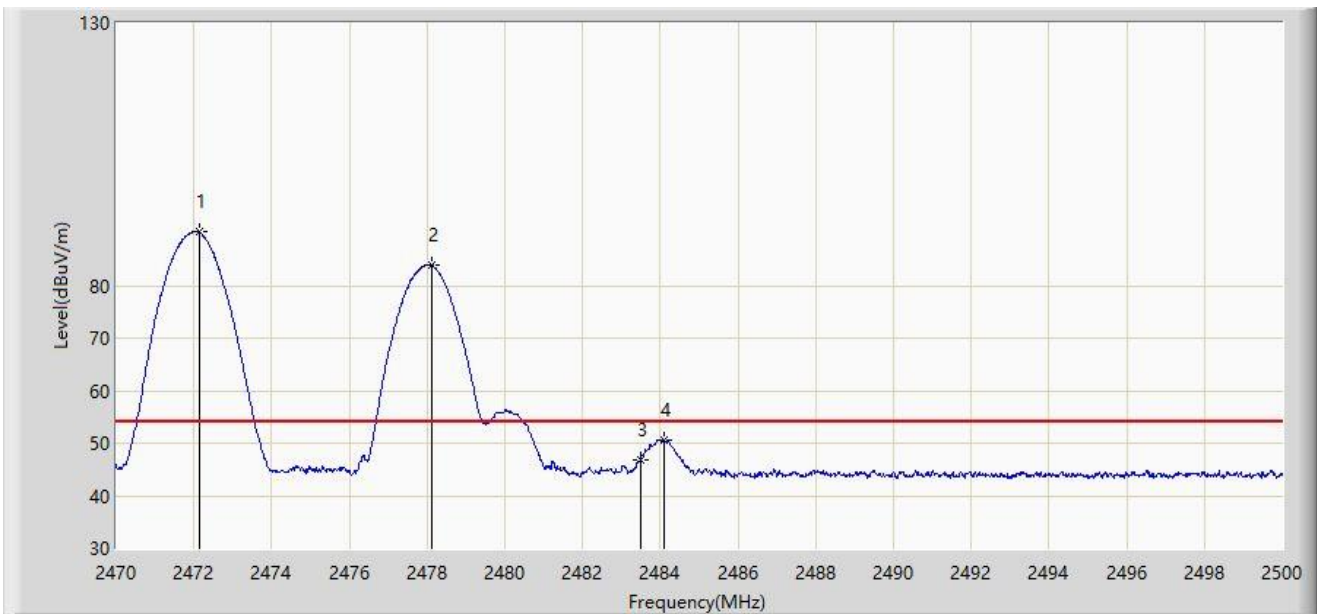


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2472.130	90.164	57.781	N/A	N/A	32.383	AV
2	*	2478.130	83.891	51.506	N/A	N/A	32.385	AV
3		2483.500	46.885	14.503	-7.115	54.000	32.382	AV
4		2484.085	50.703	18.321	-3.297	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2478MHz	

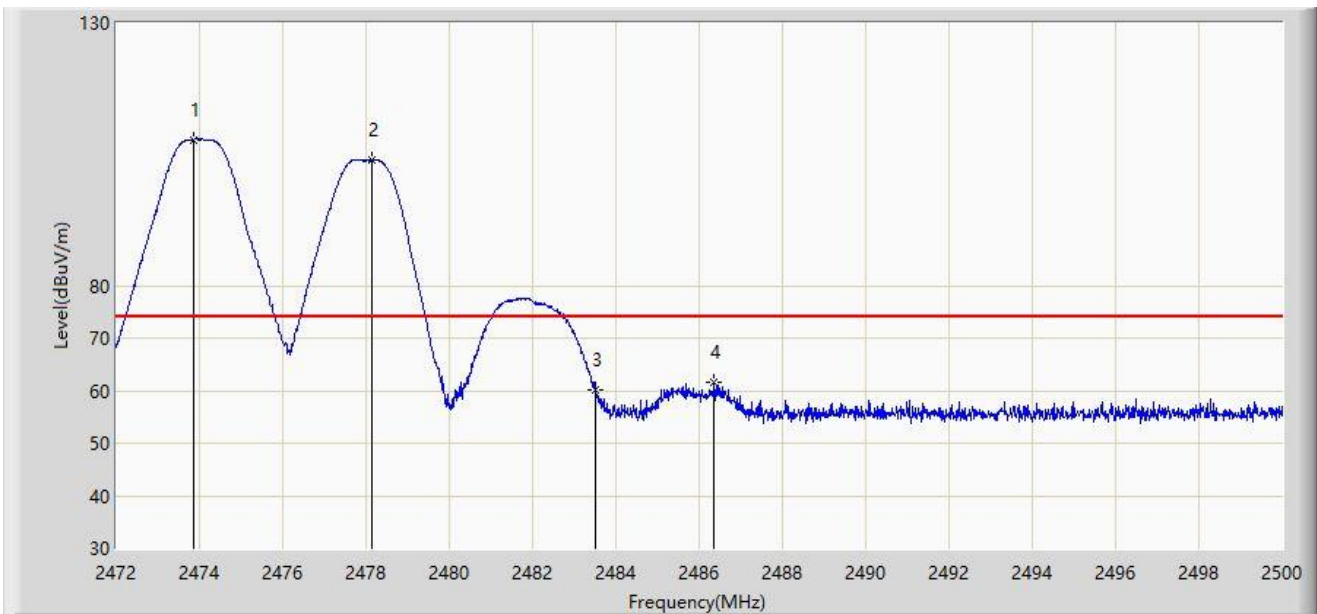


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2473.876	107.813	75.426	N/A	N/A	32.387	PK
2	*	2478.132	103.853	71.468	N/A	N/A	32.385	PK
3		2483.500	60.285	27.903	-13.715	74.000	32.382	PK
4		2486.350	61.508	29.127	-12.492	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2478MHz	

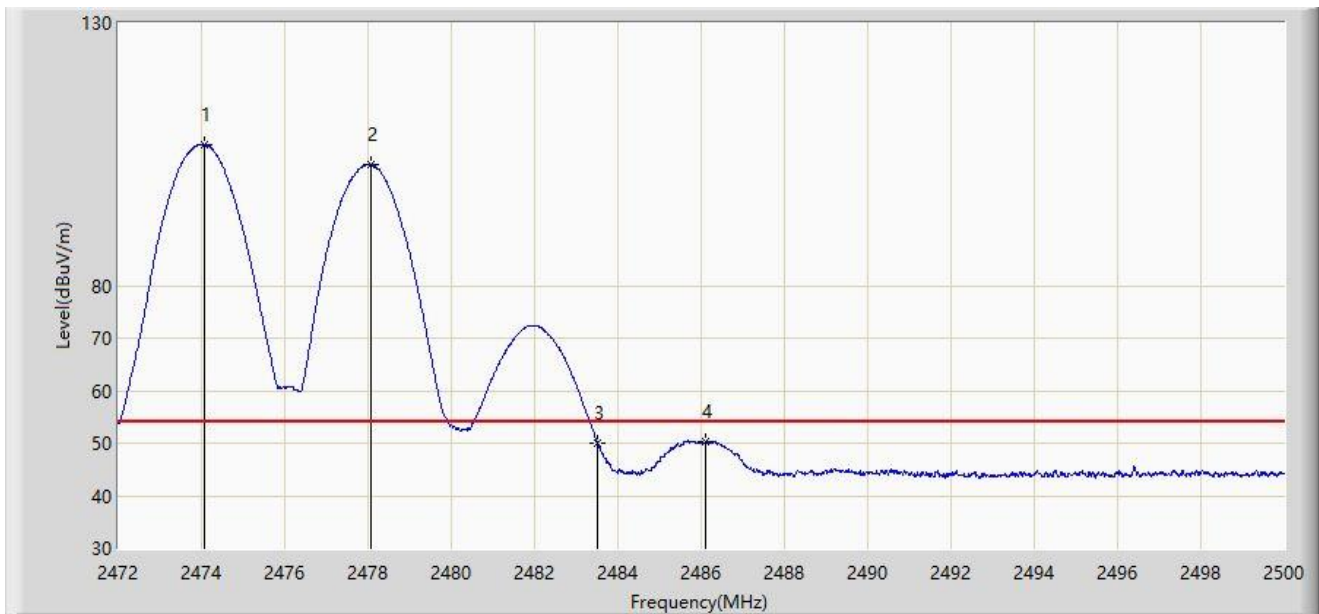


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2474.072	106.935	74.548	N/A	N/A	32.387	AV
2	*	2478.076	102.978	70.593	N/A	N/A	32.385	AV
3		2483.500	50.117	17.735	-3.883	54.000	32.382	AV
4		2486.098	50.408	18.027	-3.592	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2478MHz	

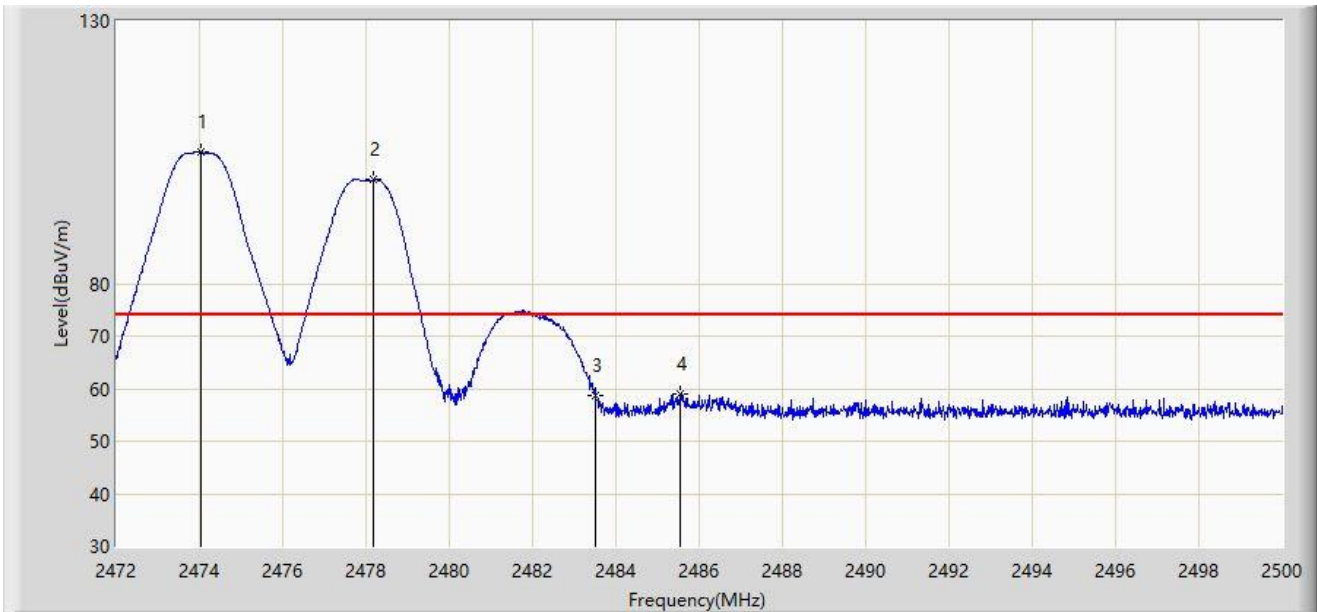


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.030	105.119	72.732	N/A	N/A	32.387	PK
2	*	2478.160	99.765	67.380	N/A	N/A	32.385	PK
3		2483.500	58.617	26.235	-15.383	74.000	32.382	PK
4		2485.552	58.924	26.543	-15.076	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2478MHz	

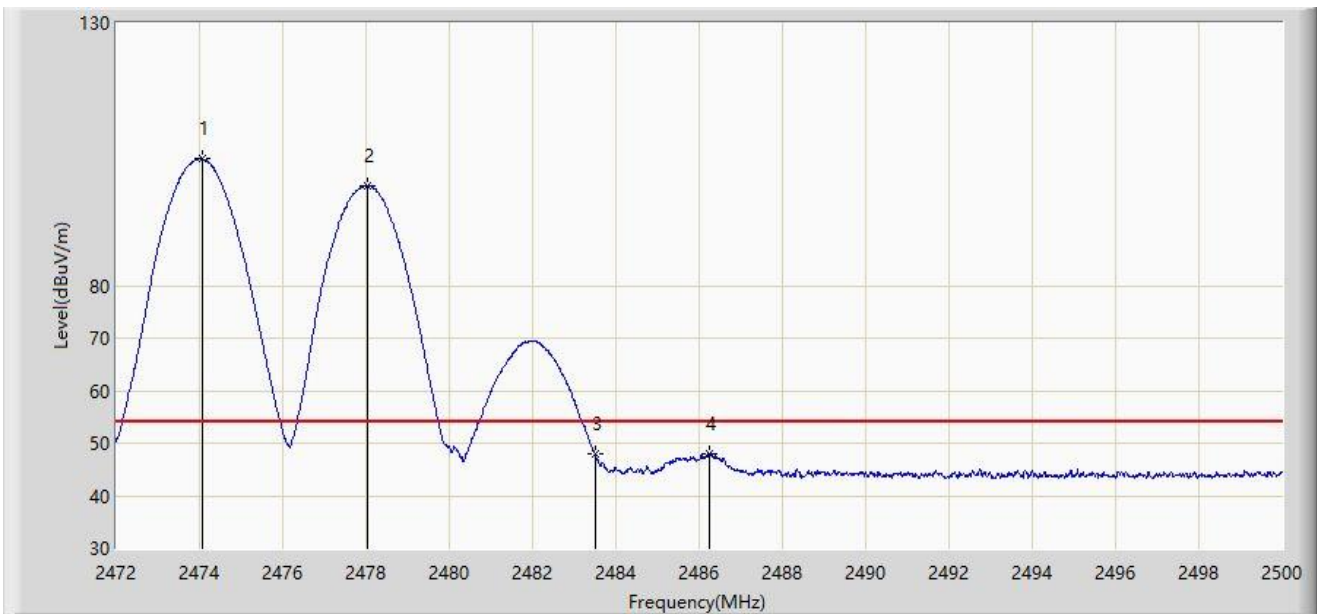


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2474.072	104.093	71.706	N/A	N/A	32.387	AV
2	*	2478.034	99.040	66.655	N/A	N/A	32.385	AV
3		2483.500	47.831	15.449	-6.169	54.000	32.382	AV
4		2486.238	48.037	15.656	-5.963	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2478MHz	

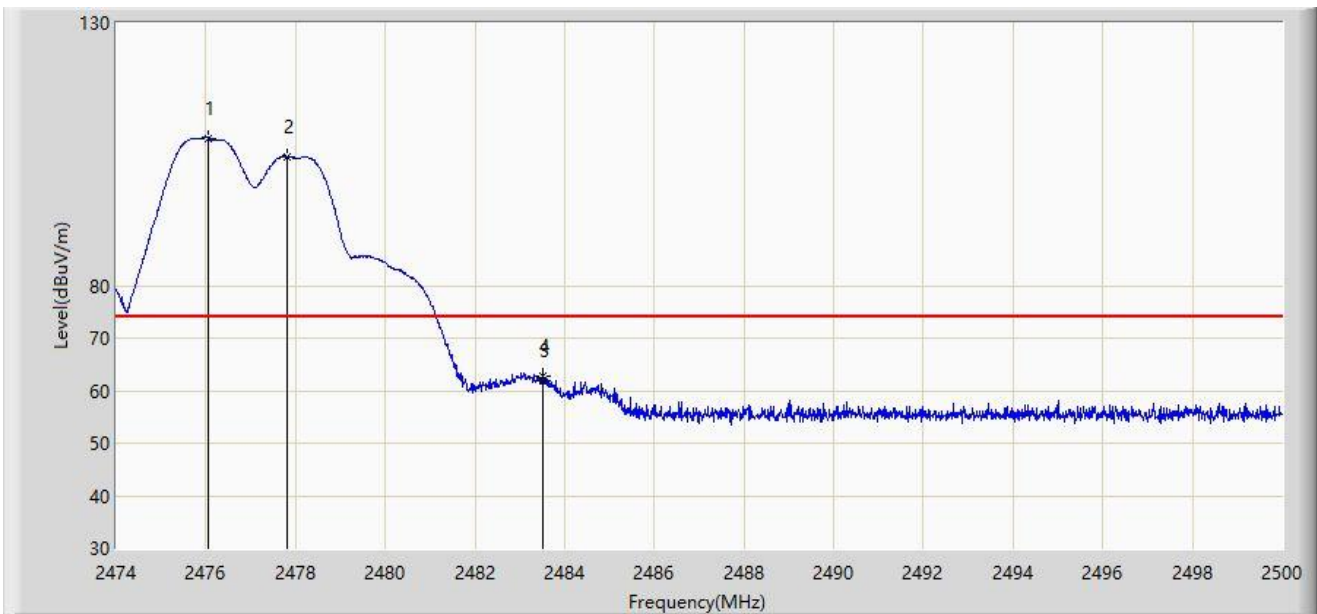


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2476.054	108.114	75.728	N/A	N/A	32.386	PK
2	*	2477.822	104.510	72.125	N/A	N/A	32.385	PK
3		2483.500	61.907	29.525	-12.093	74.000	32.382	PK
4		2483.529	62.888	30.506	-11.112	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2478MHz	

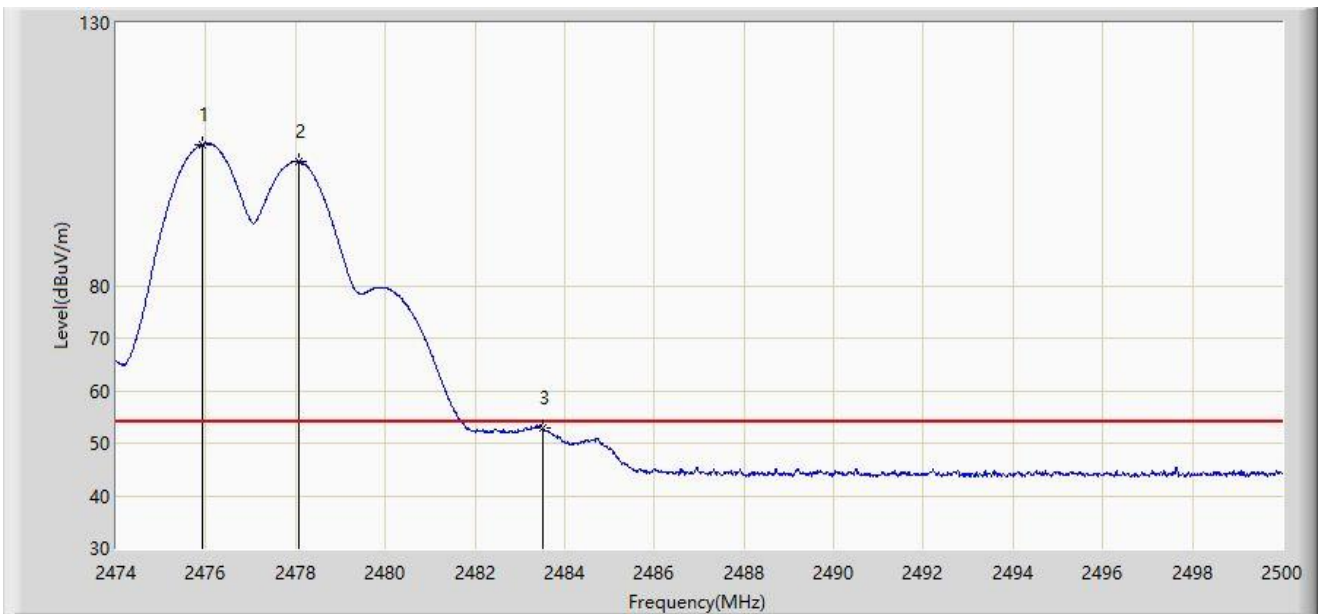


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2475.937	106.899	74.513	N/A	N/A	32.386	AV
2	*	2478.069	103.688	71.303	N/A	N/A	32.385	AV
3		2483.500	53.034	20.652	-0.966	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2478MHz	

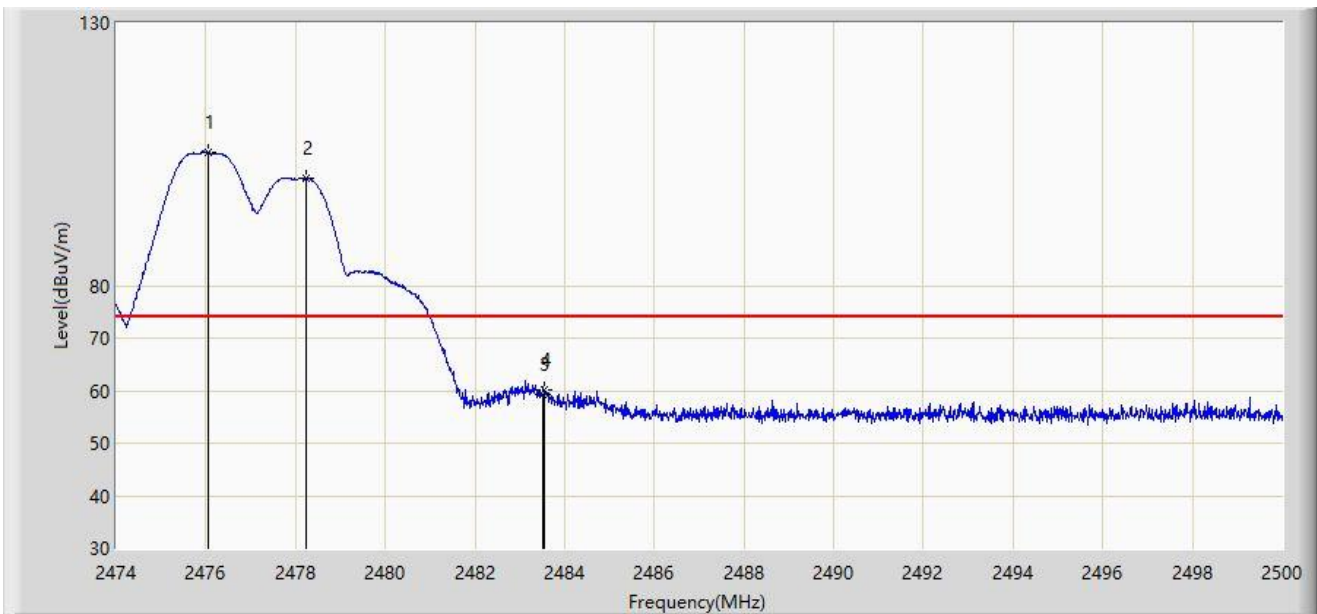


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2476.067	105.337	72.951	N/A	N/A	32.386	PK
2	*	2478.251	100.388	68.003	N/A	N/A	32.385	PK
3		2483.500	59.156	26.774	-14.844	74.000	32.382	PK
4		2483.555	60.041	27.659	-13.959	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2478MHz	

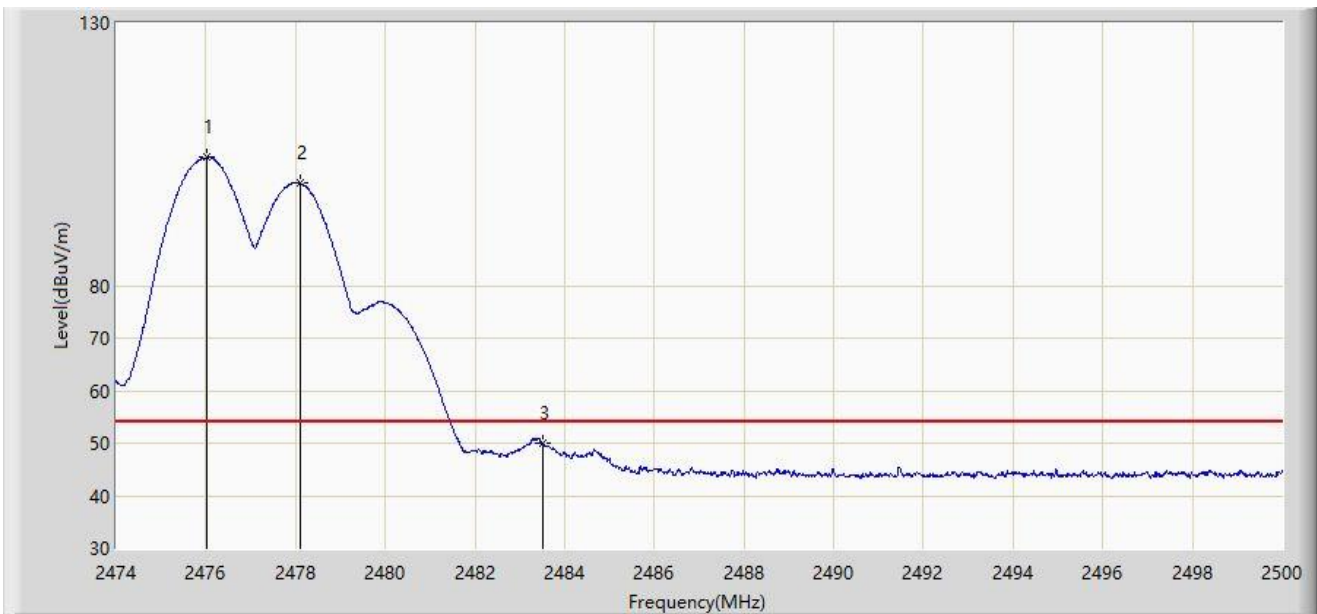


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2476.015	104.391	72.005	N/A	N/A	32.386	AV
2	*	2478.108	99.545	67.160	N/A	N/A	32.385	AV
3		2483.500	49.917	17.535	-4.083	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2480MHz	

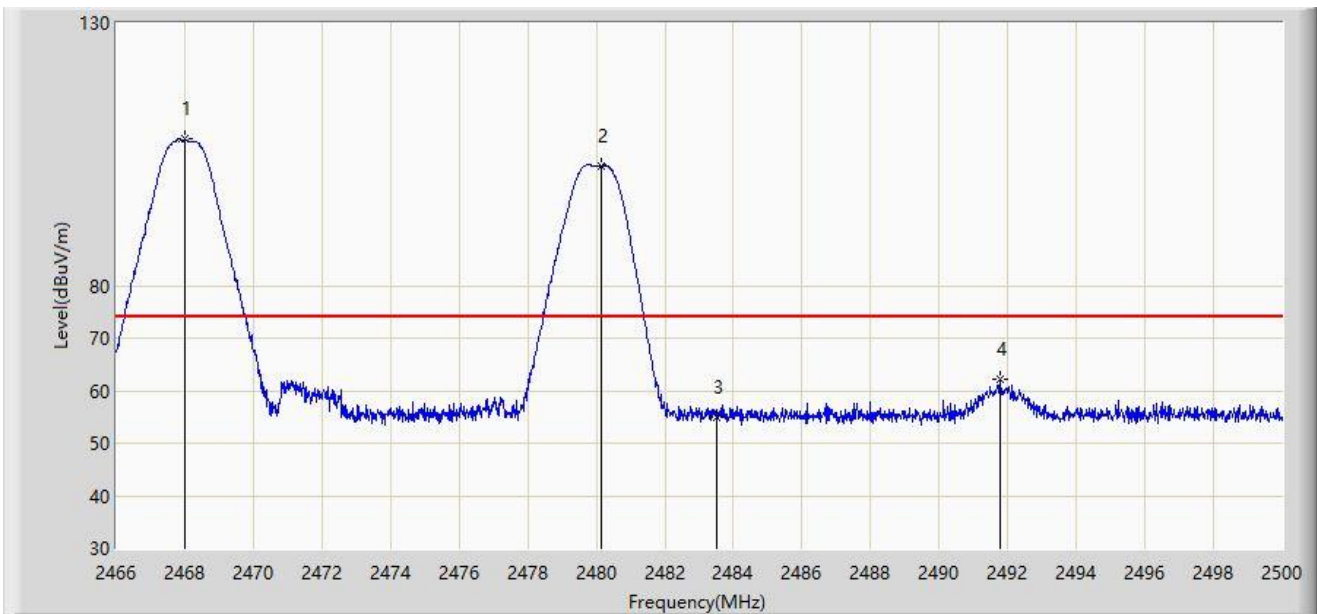


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2468.023	107.836	75.461	N/A	N/A	32.375	PK
2	*	2480.144	102.848	70.464	N/A	N/A	32.384	PK
3		2483.500	54.917	22.535	-19.083	74.000	32.382	PK
4		2491.789	62.220	29.842	-11.780	74.000	32.378	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2480MHz	

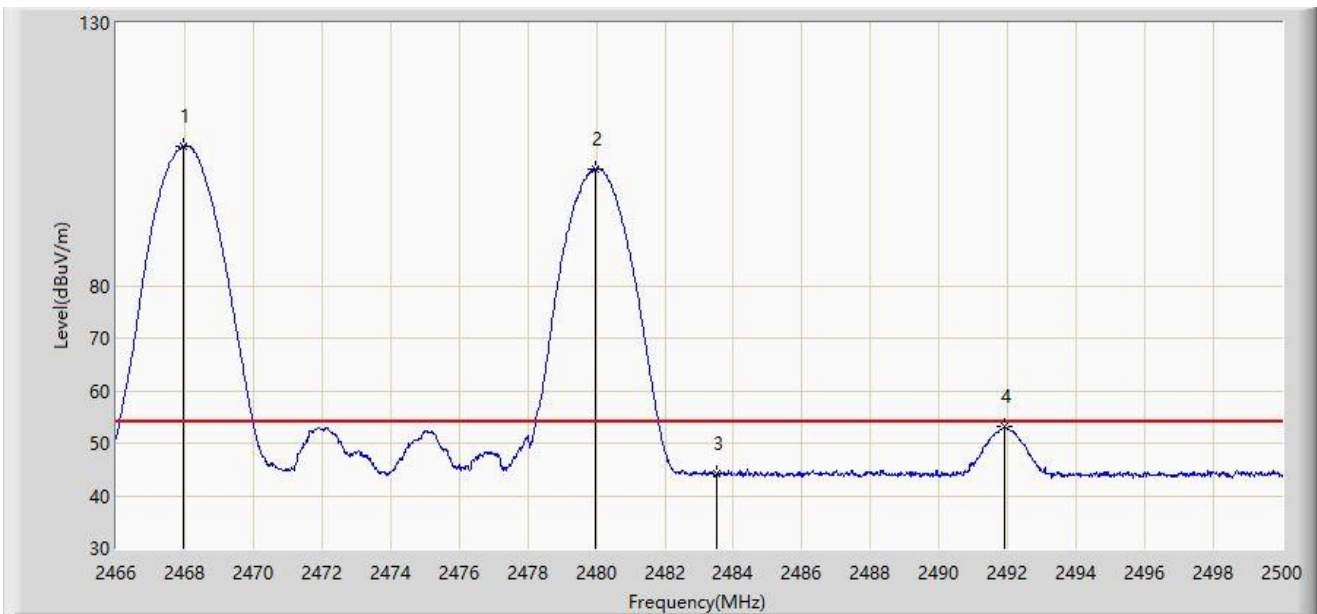


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2467.972	106.600	74.225	N/A	N/A	32.375	AV
2	*	2479.957	102.234	69.850	N/A	N/A	32.384	AV
3		2483.500	44.143	11.761	-9.857	54.000	32.382	AV
4		2491.925	53.053	20.674	-0.947	54.000	32.378	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2480MHz	

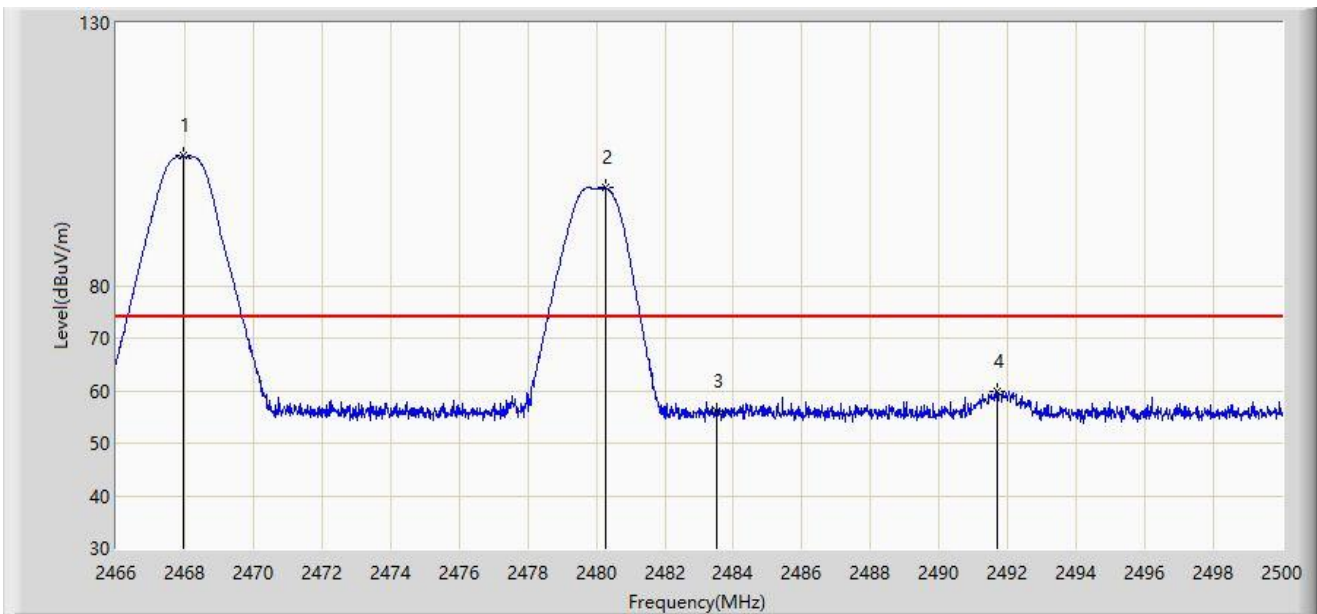


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2467.972	104.716	72.341	N/A	N/A	32.375	PK
2	*	2480.263	98.557	66.173	N/A	N/A	32.384	PK
3		2483.500	55.967	23.585	-18.033	74.000	32.382	PK
4		2491.704	59.738	27.359	-14.262	74.000	32.378	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 4# - 2480MHz	

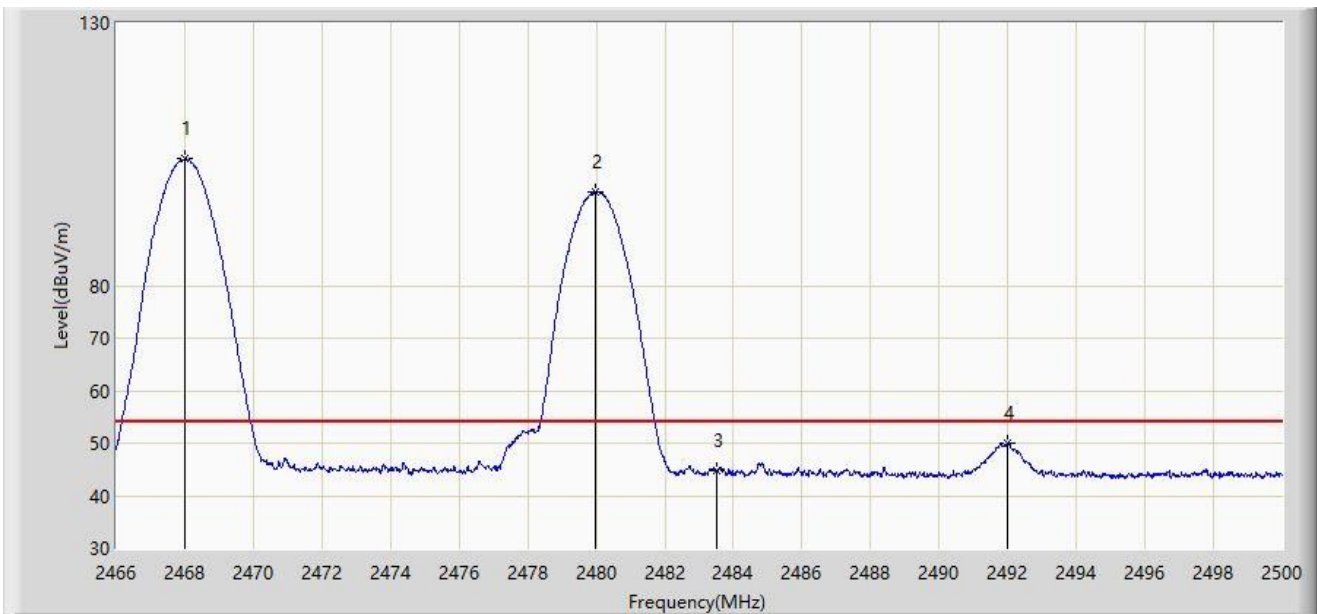


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2468.006	104.070	71.695	N/A	N/A	32.375	AV
2	*	2479.974	97.882	65.498	N/A	N/A	32.384	AV
3		2483.500	44.734	12.352	-9.266	54.000	32.382	AV
4		2491.993	50.090	17.711	-3.910	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2480MHz	

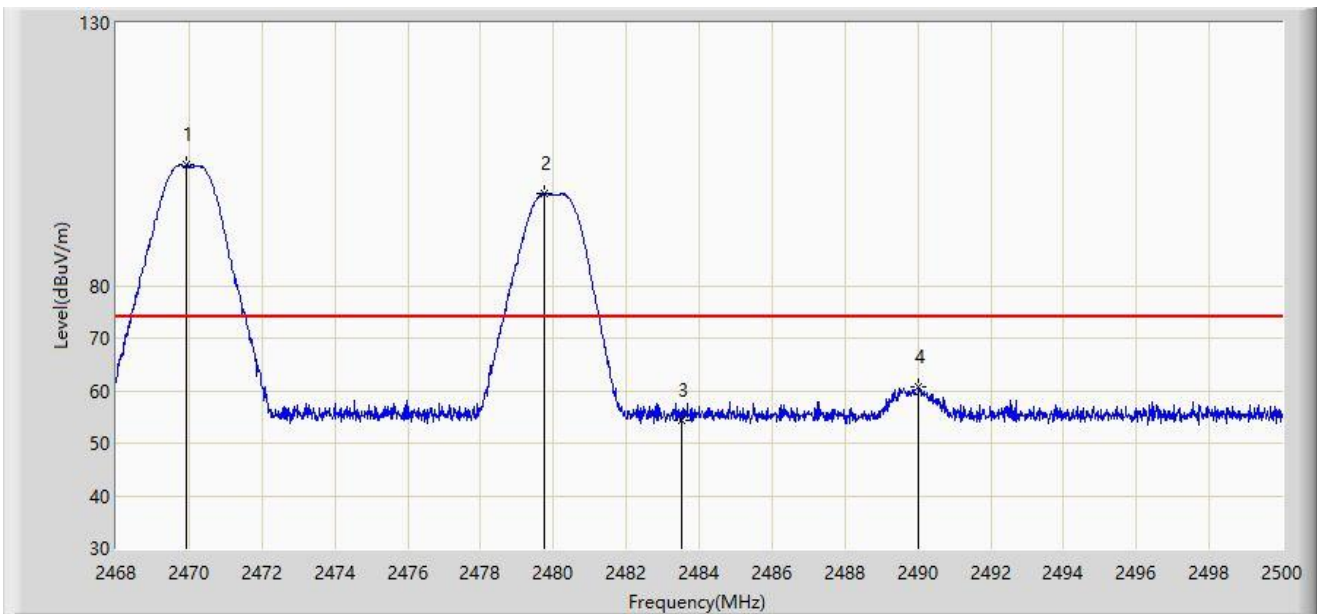


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.920	102.973	70.594	N/A	N/A	32.379	PK
2	*	2479.744	97.560	65.176	N/A	N/A	32.384	PK
3		2483.500	54.211	21.829	-19.789	74.000	32.382	PK
4		2490.016	60.592	28.213	-13.408	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2480MHz	

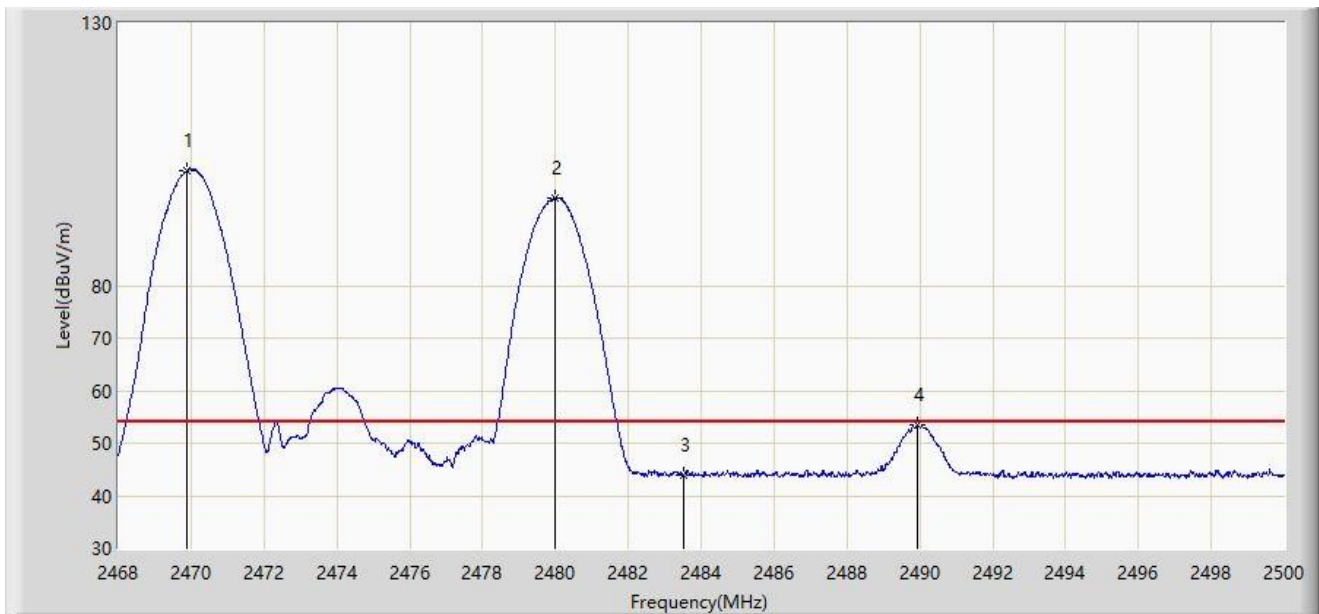


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2469.904	101.923	69.544	N/A	N/A	32.379	AV
2	*	2480.000	96.650	64.266	N/A	N/A	32.384	AV
3		2483.500	43.825	11.443	-10.175	54.000	32.382	AV
4		2489.936	53.462	21.083	-0.538	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2480MHz	

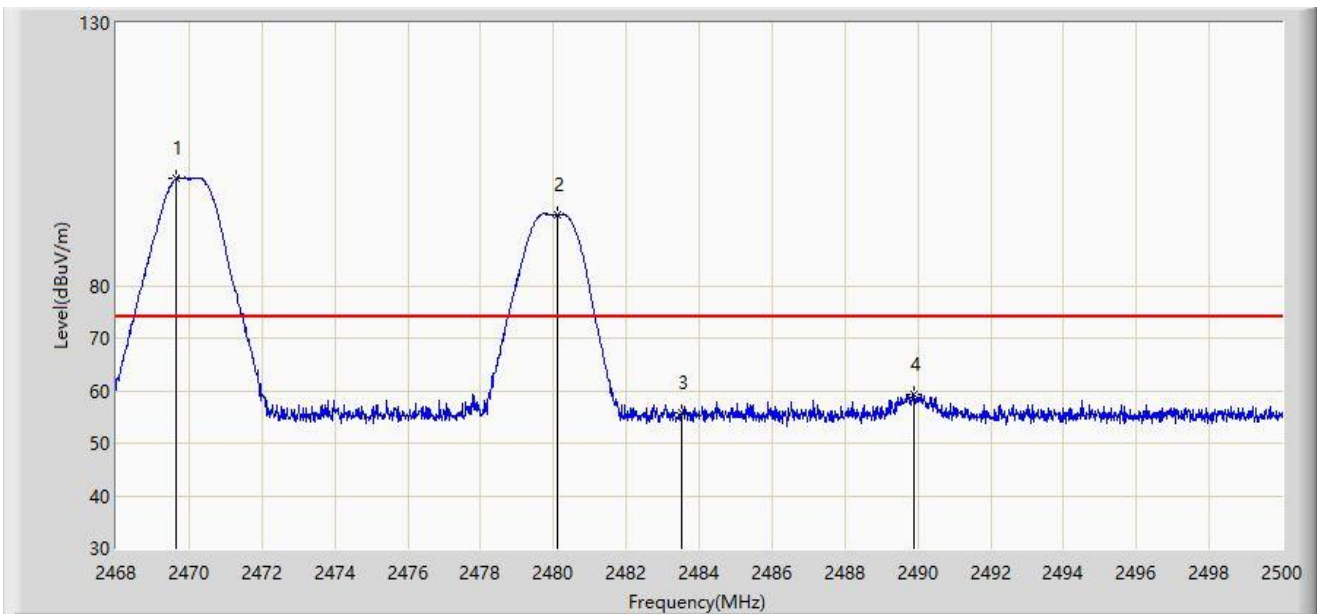


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.664	100.410	68.032	N/A	N/A	32.378	PK
2	*	2480.112	93.516	61.132	N/A	N/A	32.384	PK
3		2483.500	55.719	23.337	-18.281	74.000	32.382	PK
4		2489.904	59.240	26.861	-14.760	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 4# - 2480MHz	

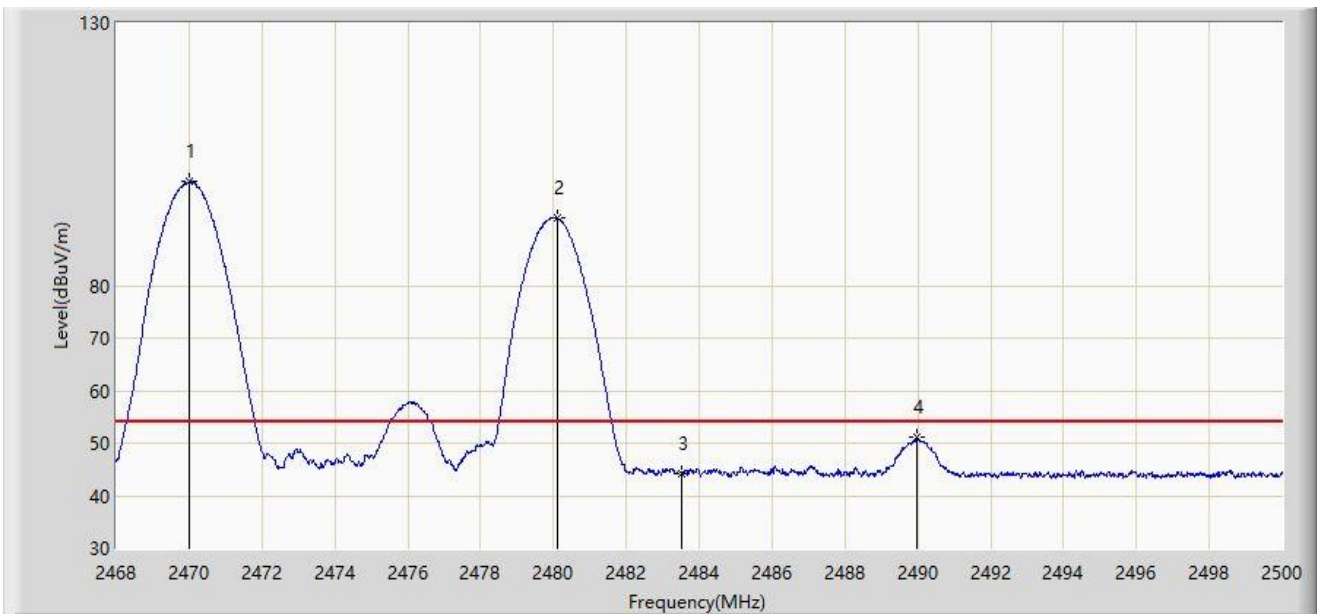


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2470.016	99.738	67.359	N/A	N/A	32.379	AV
2	*	2480.128	92.779	60.395	N/A	N/A	32.384	AV
3		2483.500	44.259	11.877	-9.741	54.000	32.382	AV
4		2489.968	51.187	18.808	-2.813	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2480MHz	

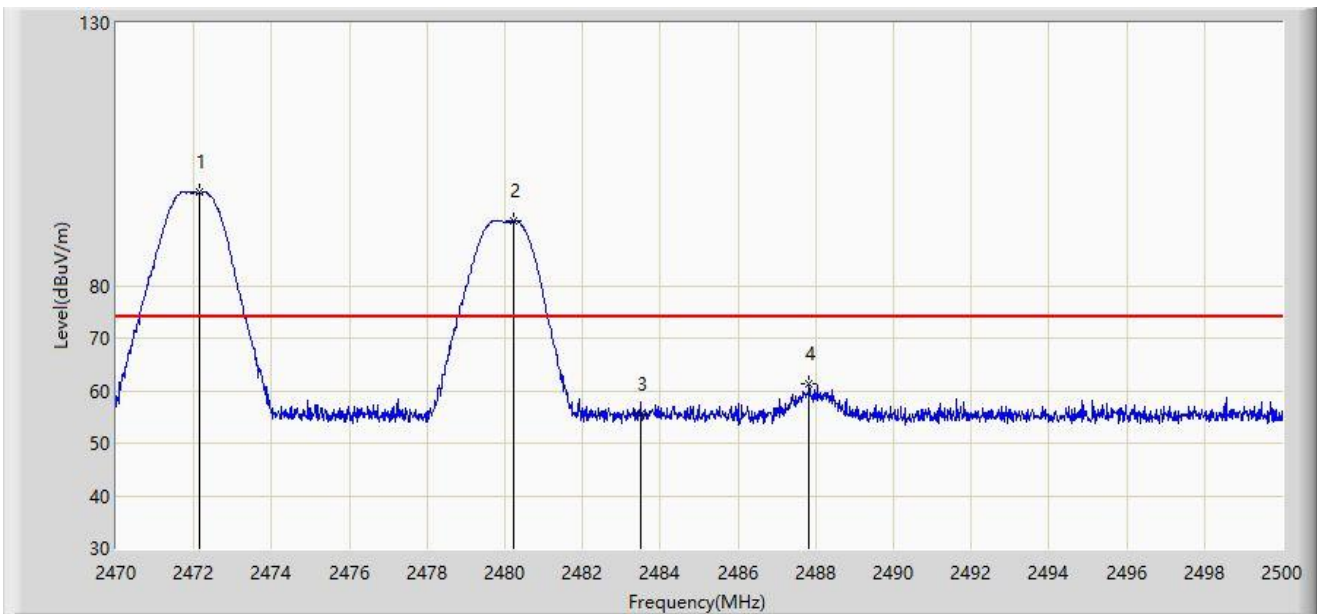


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2472.130	97.687	65.304	N/A	N/A	32.383	PK
2	*	2480.215	92.295	59.911	N/A	N/A	32.384	PK
3		2483.500	55.512	23.130	-18.488	74.000	32.382	PK
4		2487.835	61.164	28.784	-12.836	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2480MHz	

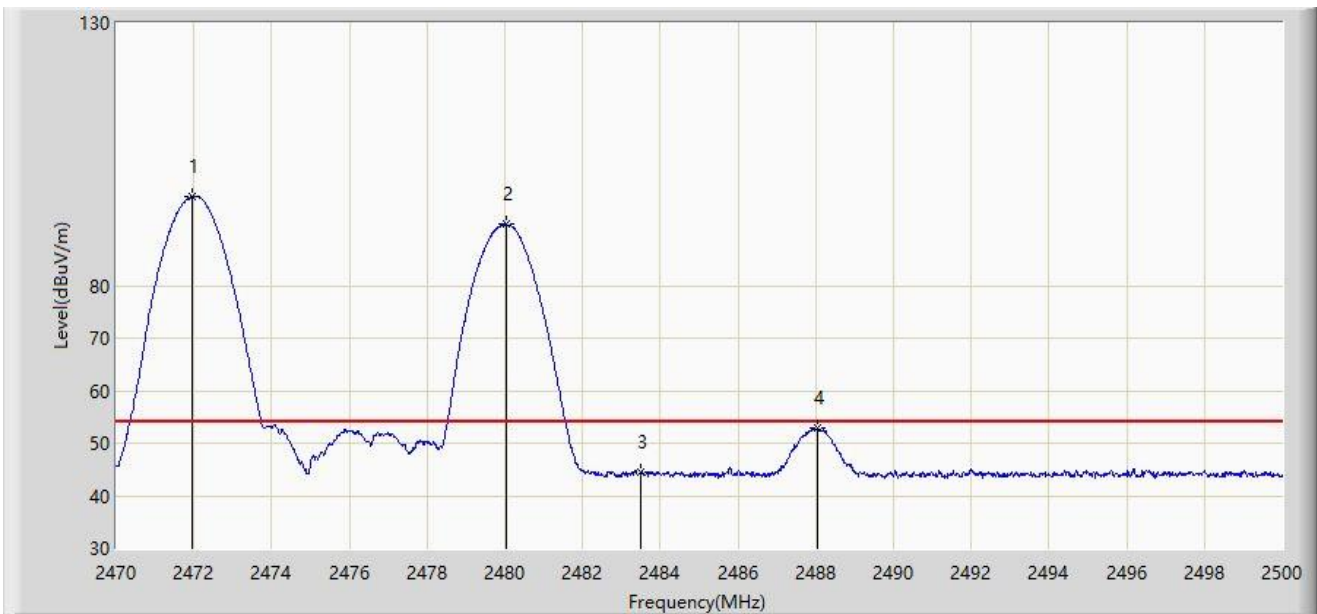


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2471.965	96.937	64.554	N/A	N/A	32.383	AV
2	*	2480.020	91.661	59.277	N/A	N/A	32.384	AV
3		2483.500	44.582	12.200	-9.418	54.000	32.382	AV
4		2488.045	52.912	20.532	-1.088	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2480MHz	

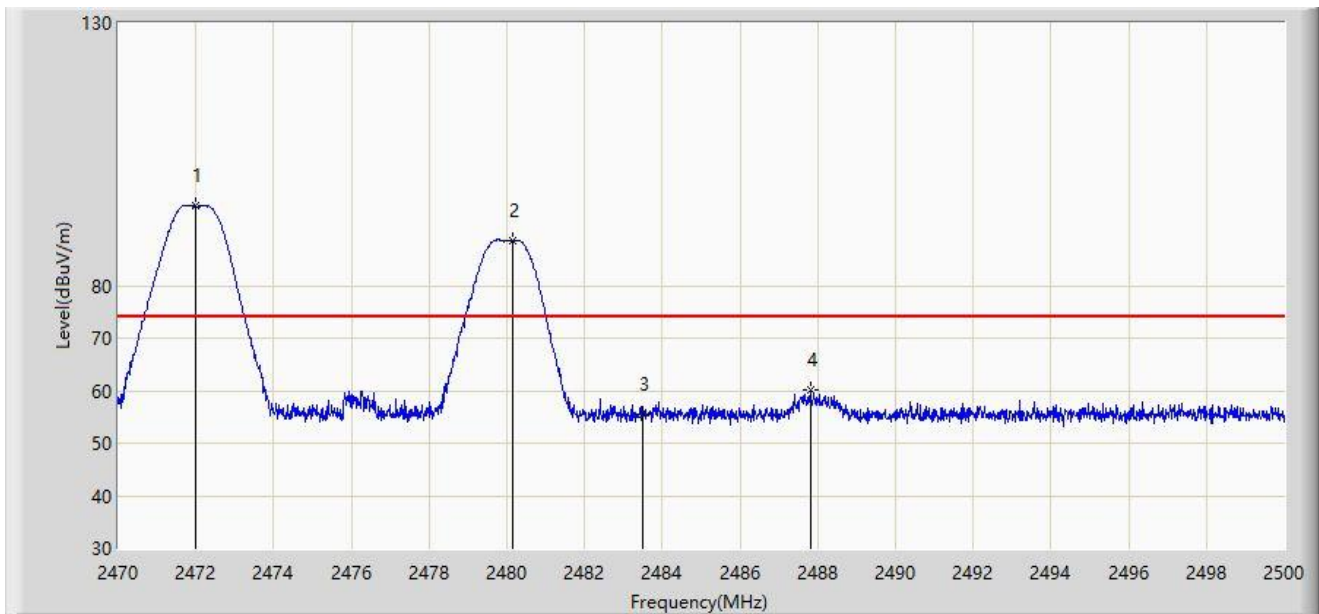


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2471.995	95.200	62.817	N/A	N/A	32.383	PK
2	*	2480.155	88.561	56.177	N/A	N/A	32.384	PK
3		2483.500	55.548	23.166	-18.452	74.000	32.382	PK
4		2487.820	60.120	27.740	-13.880	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 4# - 2480MHz	

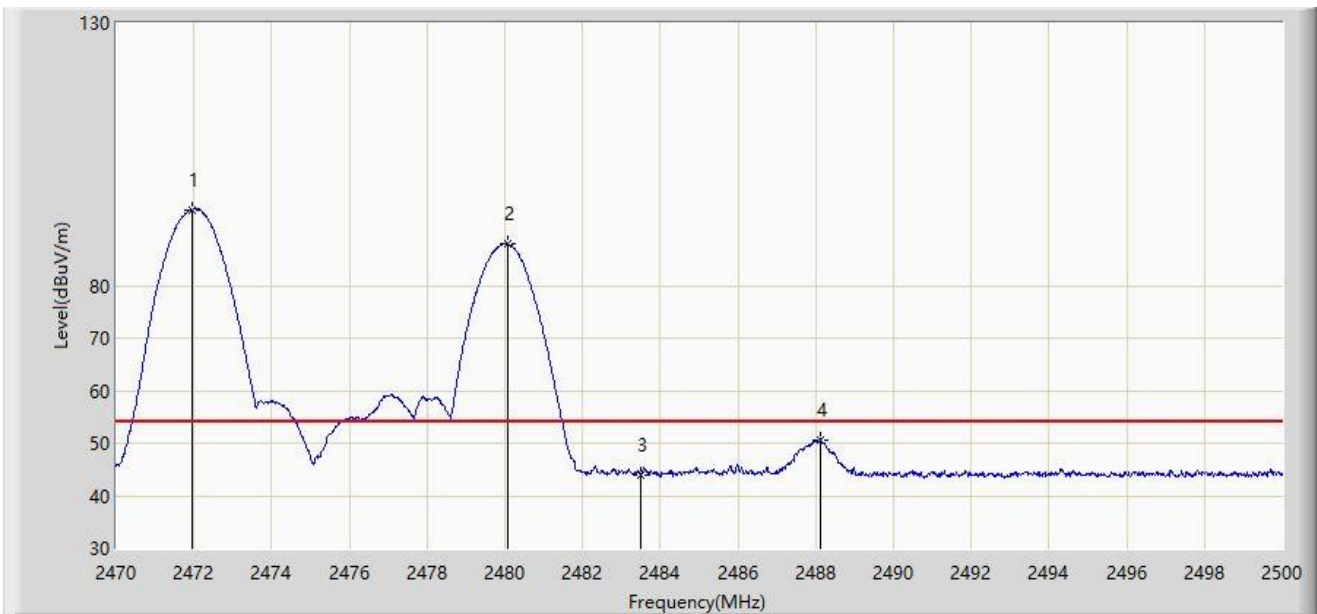


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2471.950	94.468	62.085	N/A	N/A	32.383	AV
2	*	2480.065	87.923	55.539	N/A	N/A	32.384	AV
3		2483.500	43.880	11.498	-10.120	54.000	32.382	AV
4		2488.135	50.683	18.303	-3.317	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2480MHz	

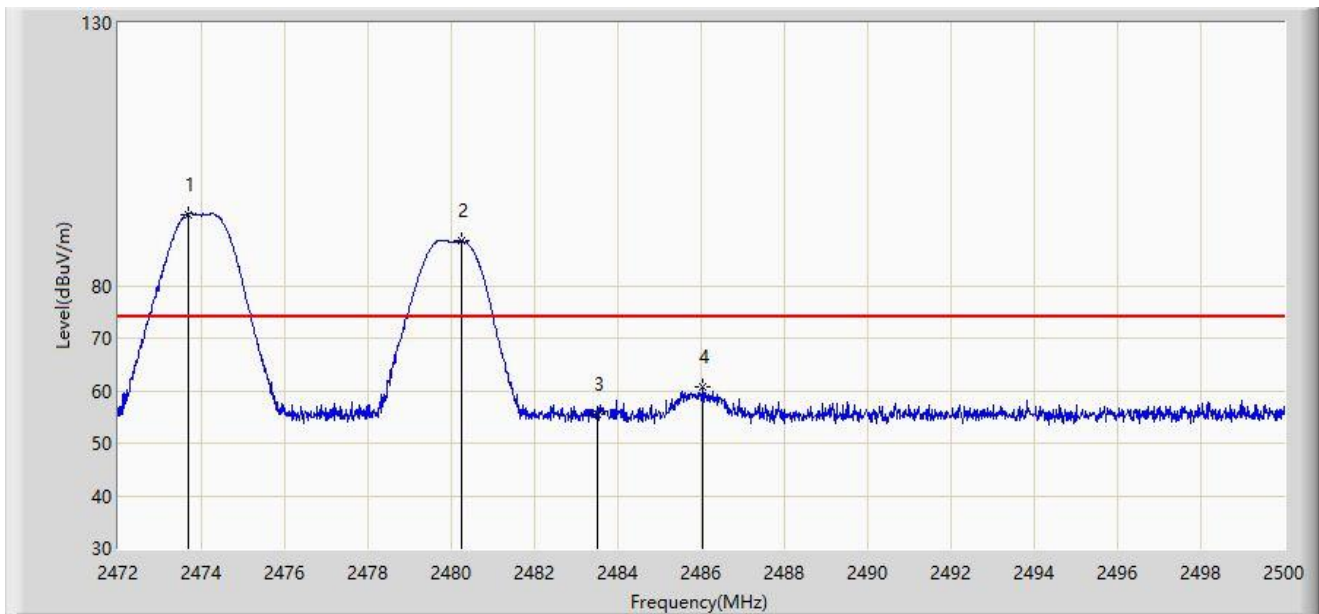


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2473.680	93.579	61.193	N/A	N/A	32.386	PK
2	*	2480.246	88.616	56.232	N/A	N/A	32.384	PK
3		2483.500	55.528	23.146	-18.472	74.000	32.382	PK
4		2486.042	60.724	28.343	-13.276	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2480MHz	

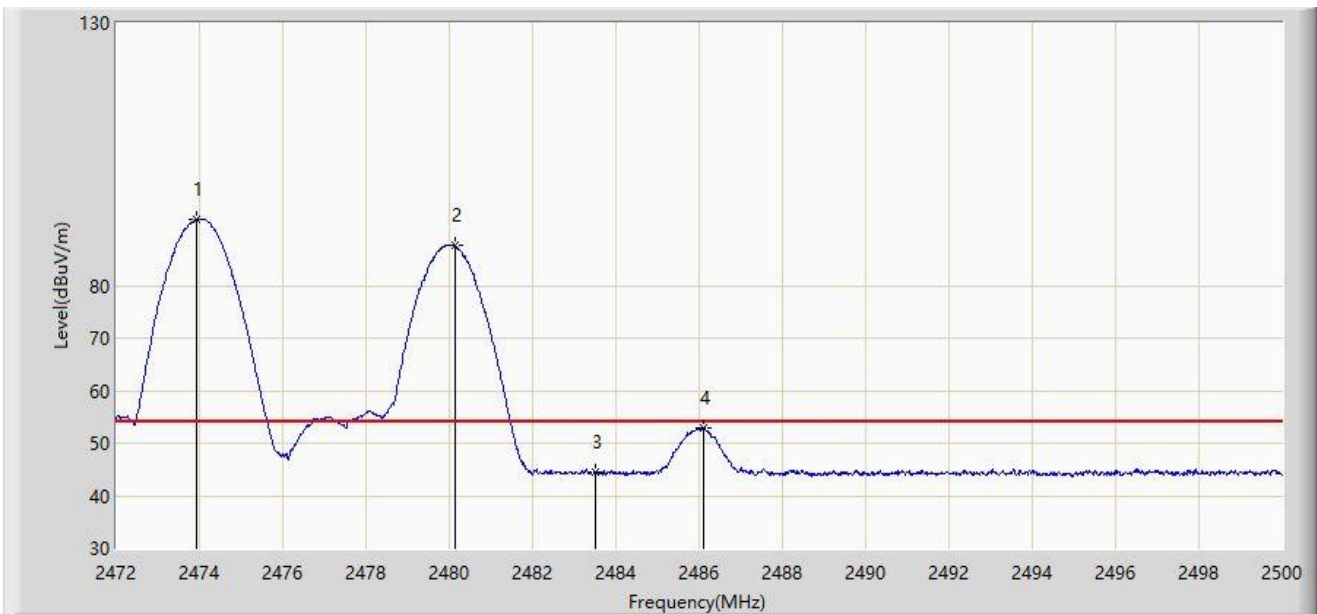


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2473.932	92.583	60.196	N/A	N/A	32.387	AV
2	*	2480.134	87.625	55.241	N/A	N/A	32.384	AV
3		2483.500	44.600	12.218	-9.400	54.000	32.382	AV
4		2486.112	52.975	20.594	-1.025	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2480MHz	

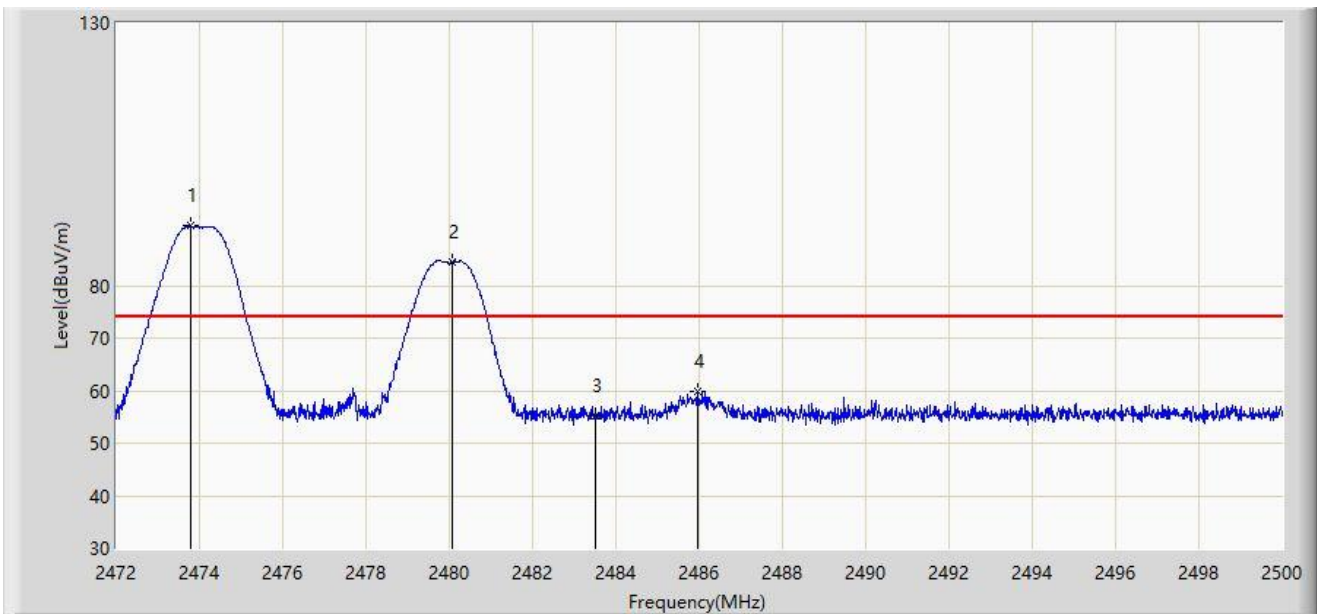


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2473.778	91.344	58.957	N/A	N/A	32.386	PK
2	*	2480.064	84.508	52.124	N/A	N/A	32.384	PK
3		2483.500	55.104	22.722	-18.896	74.000	32.382	PK
4		2485.972	59.728	27.347	-14.272	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 4# - 2480MHz	

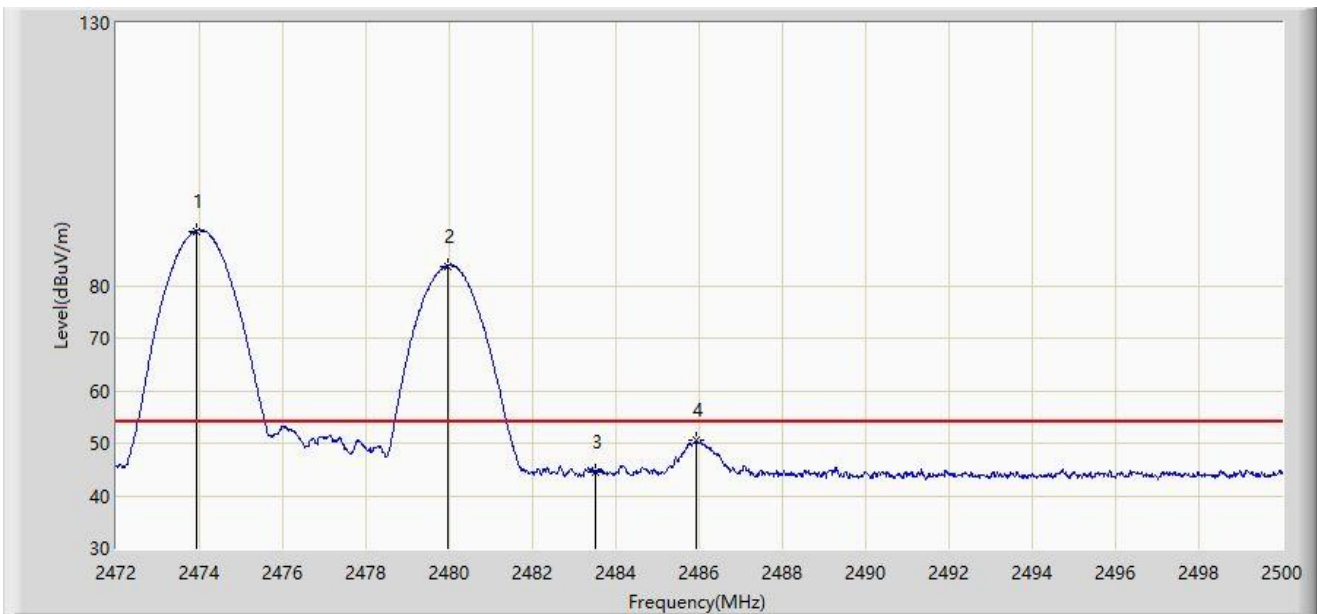


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2473.932	90.419	58.032	N/A	N/A	32.387	AV
2	*	2479.952	83.744	51.360	N/A	N/A	32.384	AV
3		2483.500	44.553	12.171	-9.447	54.000	32.382	AV
4		2485.916	50.442	18.061	-3.558	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2480MHz	

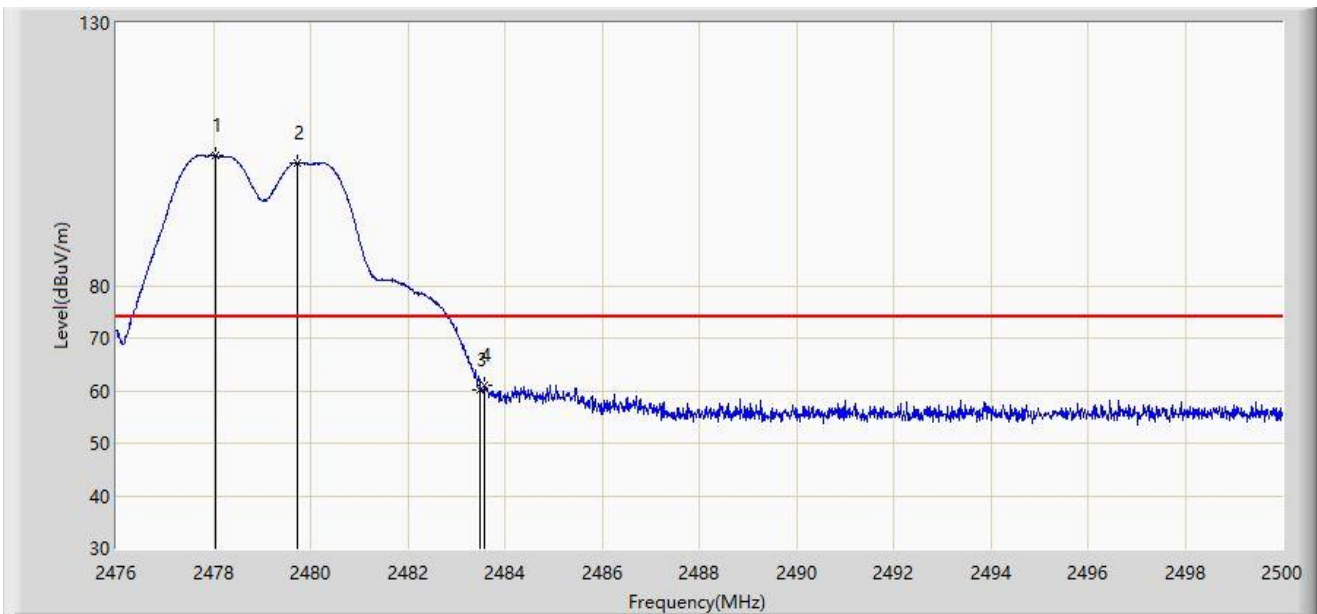


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2478.040	104.747	72.362	N/A	N/A	32.385	PK
2	*	2479.720	103.459	71.075	N/A	N/A	32.384	PK
3		2483.500	60.167	27.785	-13.833	74.000	32.382	PK
4		2483.584	61.130	28.748	-12.870	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2480MHz	

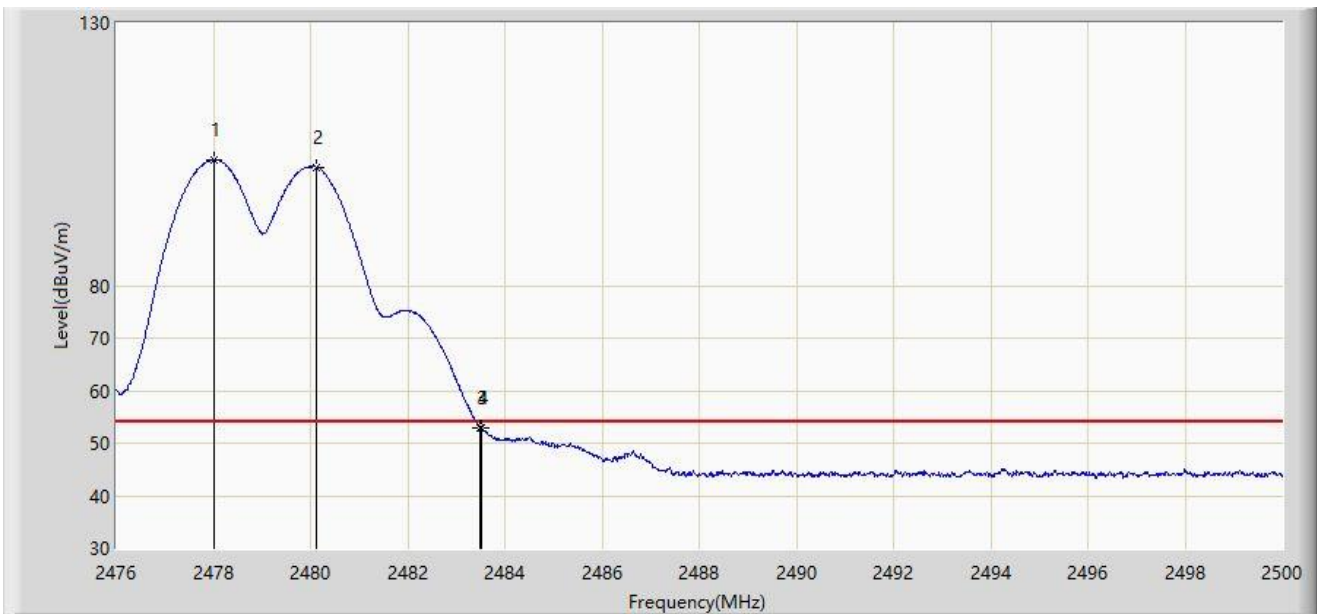


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2478.004	103.959	71.574	N/A	N/A	32.385	AV
2	*	2480.128	102.535	70.151	N/A	N/A	32.384	AV
3		2483.500	52.872	20.490	-1.128	54.000	32.382	AV
4		2483.512	52.937	20.555	-1.063	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2480MHz	

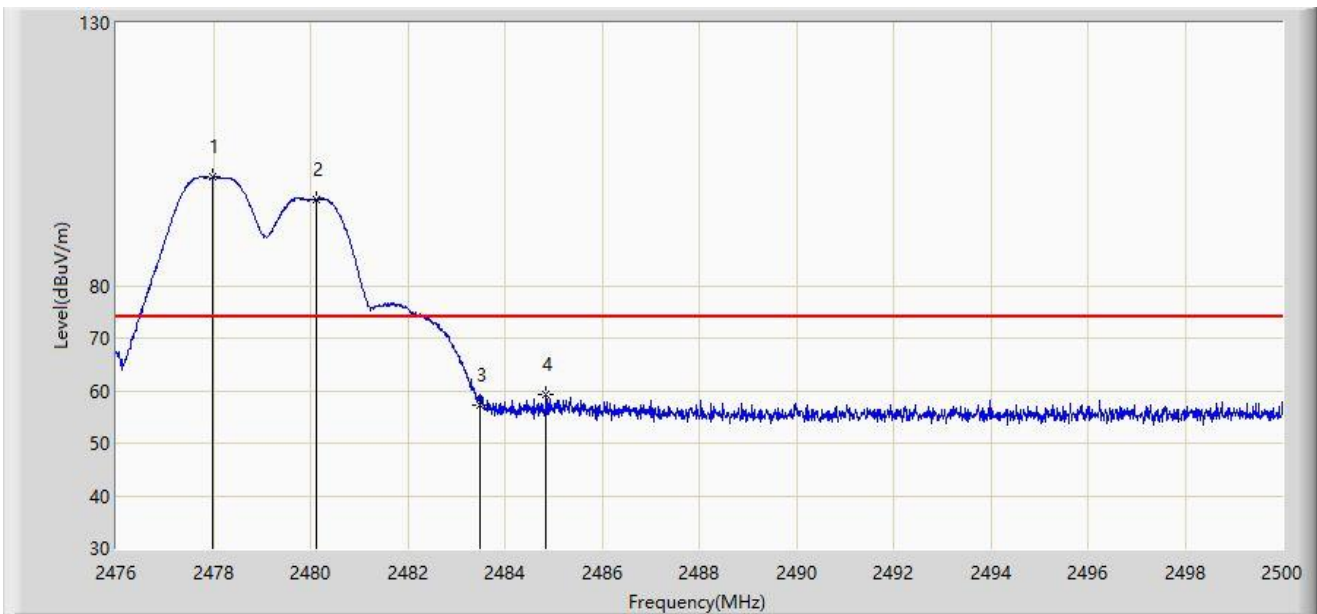


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2477.992	100.823	68.438	N/A	N/A	32.385	PK
2	*	2480.116	96.459	64.075	N/A	N/A	32.384	PK
3		2483.500	57.110	24.728	-16.890	74.000	32.382	PK
4		2484.856	59.168	26.786	-14.832	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2478MHz Ant 8 - Filter 4# - 2480MHz	

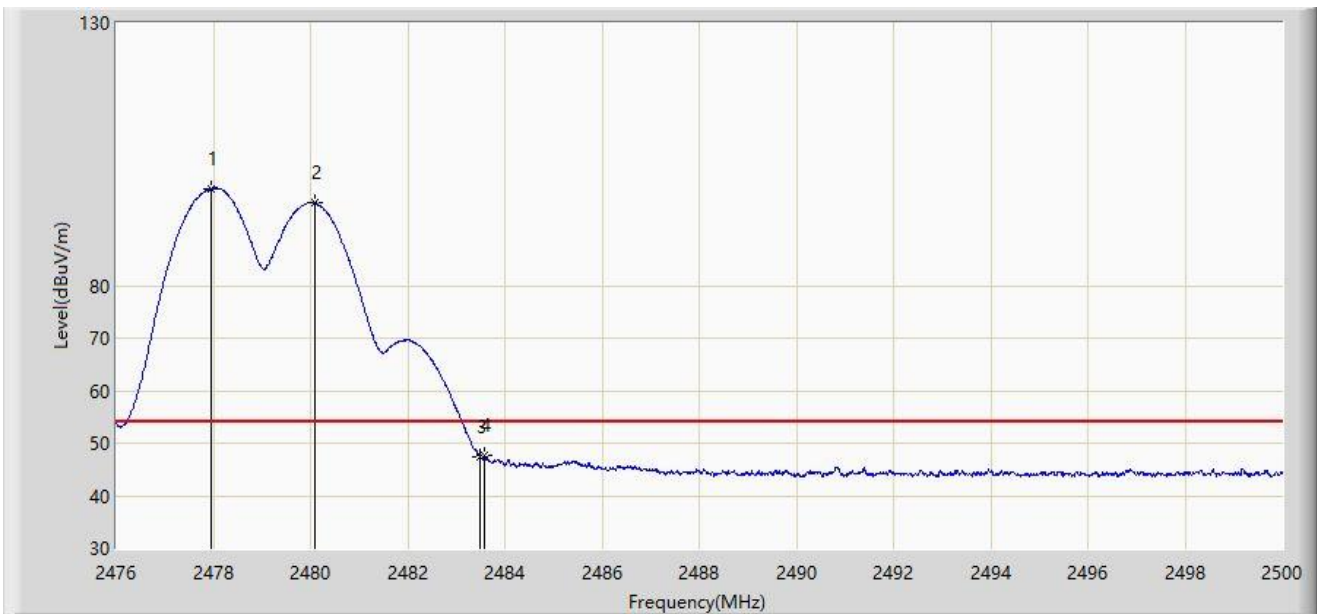


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2477.968	98.489	66.104	N/A	N/A	32.385	AV
2	*	2480.092	95.698	63.314	N/A	N/A	32.384	AV
3		2483.500	47.444	15.062	-6.556	54.000	32.382	AV
4		2483.584	47.559	15.177	-6.441	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

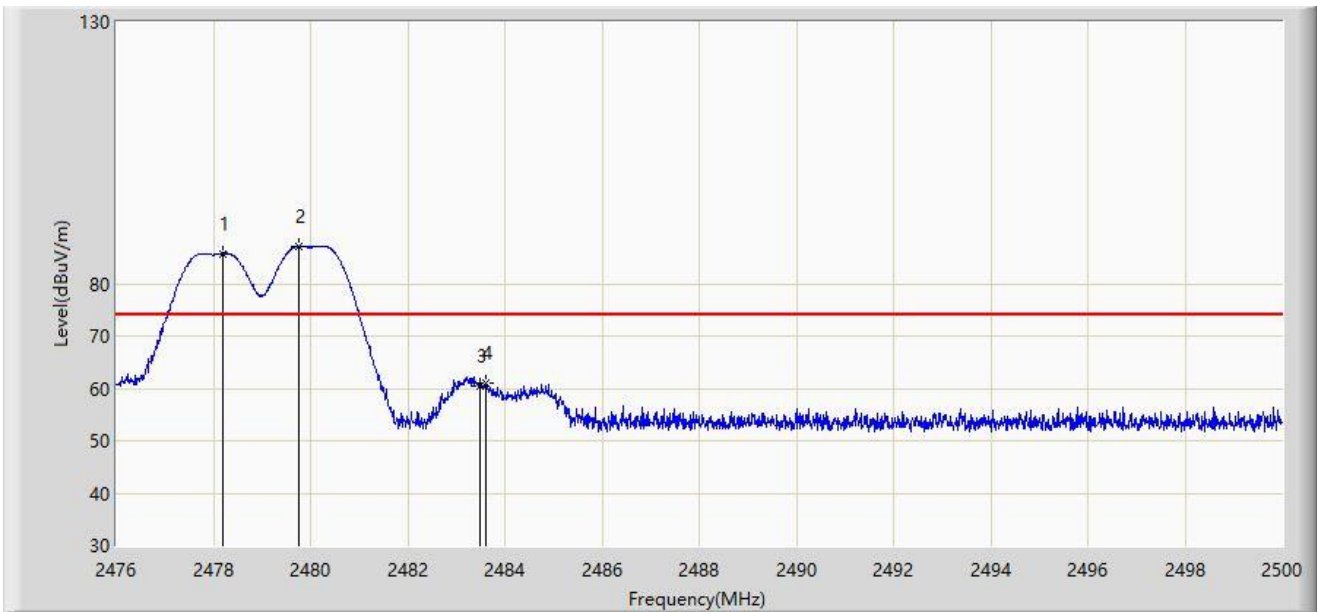


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2478.196	85.748	53.363	N/A	N/A	32.385	PK
2		2479.756	87.199	54.815	N/A	N/A	32.384	PK
3		2483.500	60.327	27.945	-13.673	74.000	32.382	PK
4		2483.608	60.944	28.562	-13.056	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

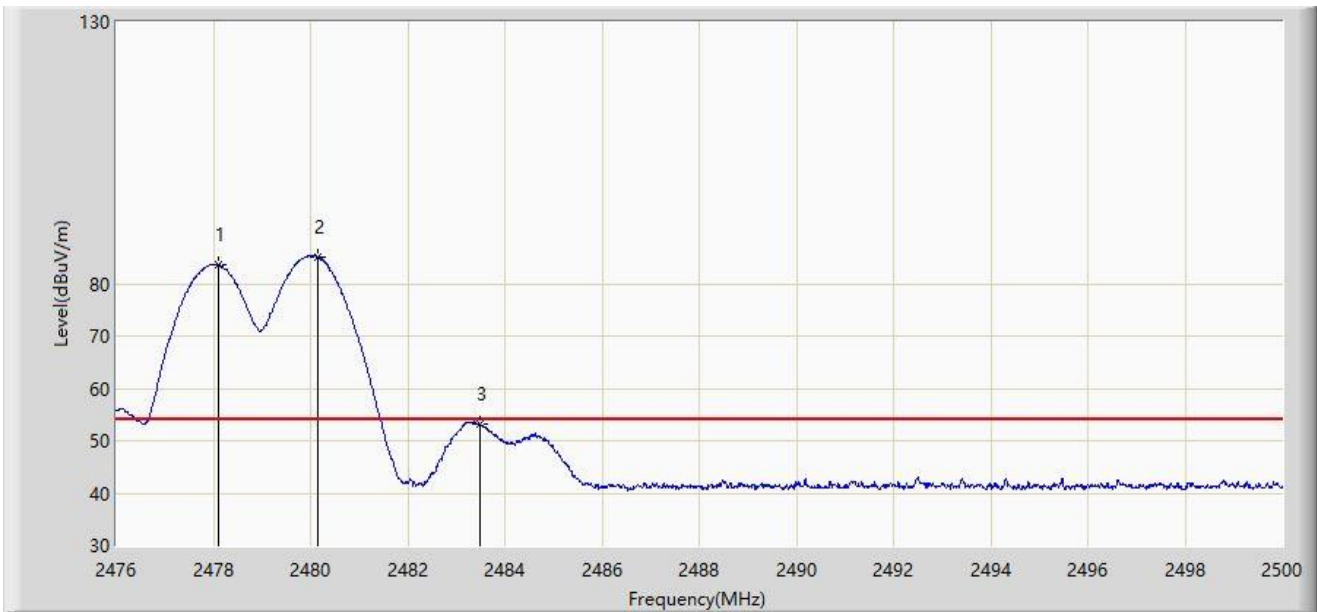


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2478.112	83.611	51.226	N/A	N/A	32.385	AV
2		2480.140	85.162	52.778	N/A	N/A	32.384	AV
3		2483.500	53.122	20.740	-0.878	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

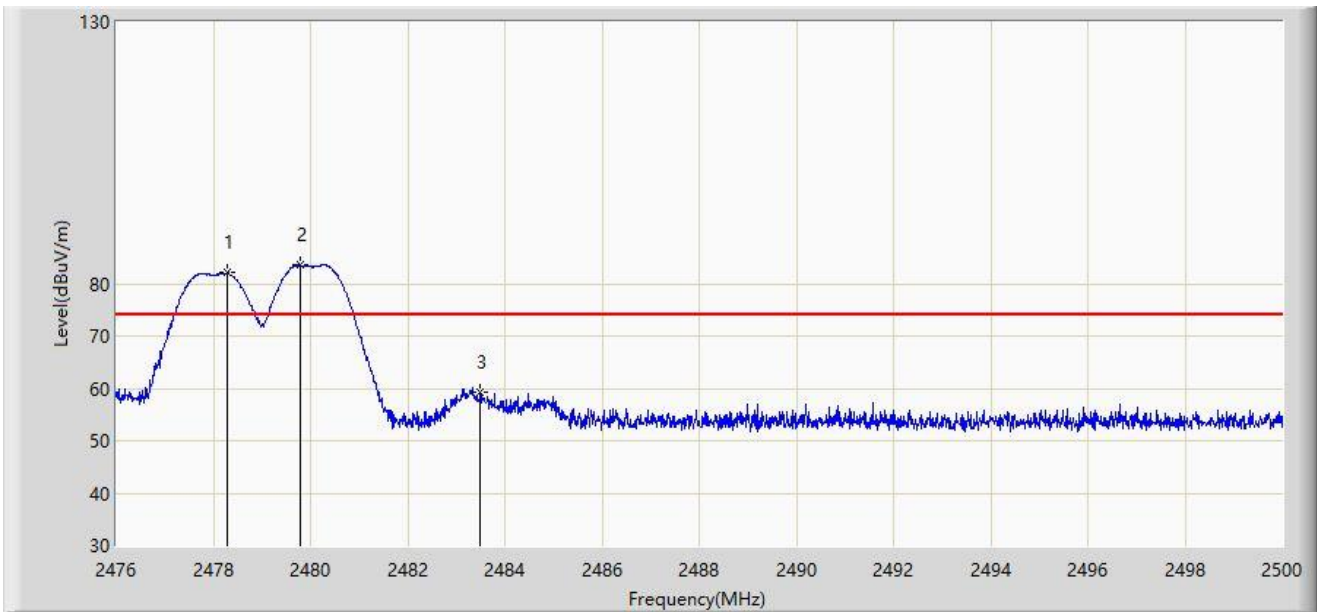


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2478.280	82.046	49.661	N/A	N/A	32.385	PK
2		2479.792	83.609	51.225	N/A	N/A	32.384	PK
3		2483.500	59.131	26.749	-14.869	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

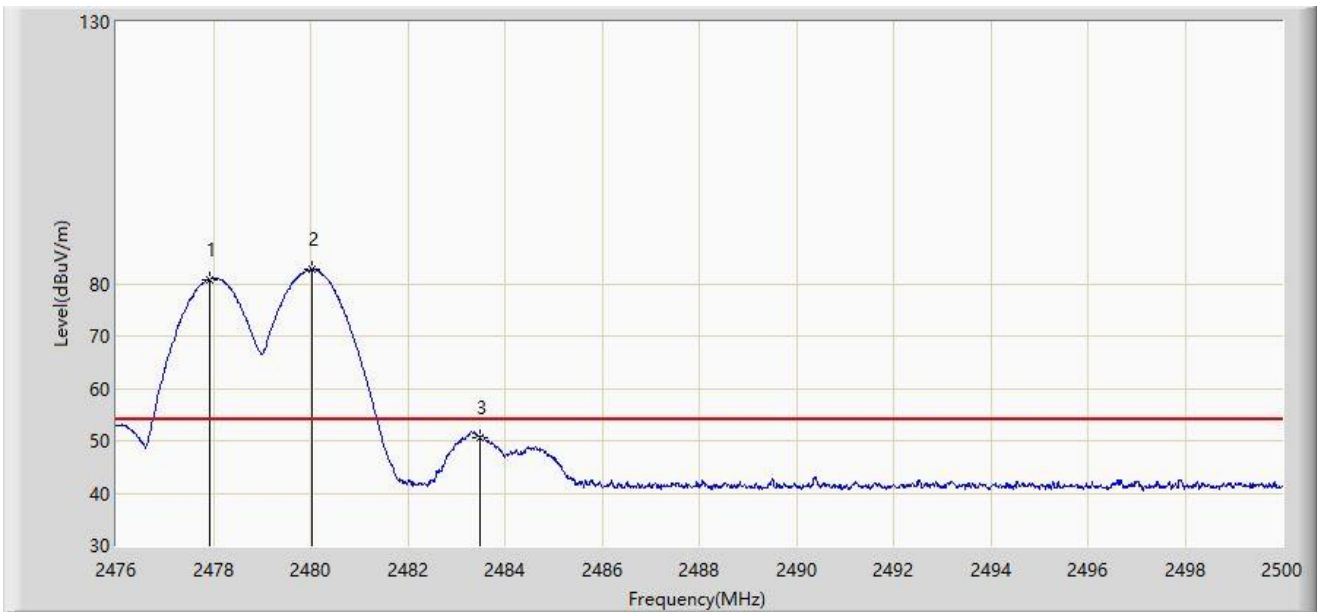


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2477.932	80.863	48.478	N/A	N/A	32.385	AV
2		2480.020	82.649	50.265	N/A	N/A	32.384	AV
3		2483.500	50.576	18.194	-3.424	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2480MHz	

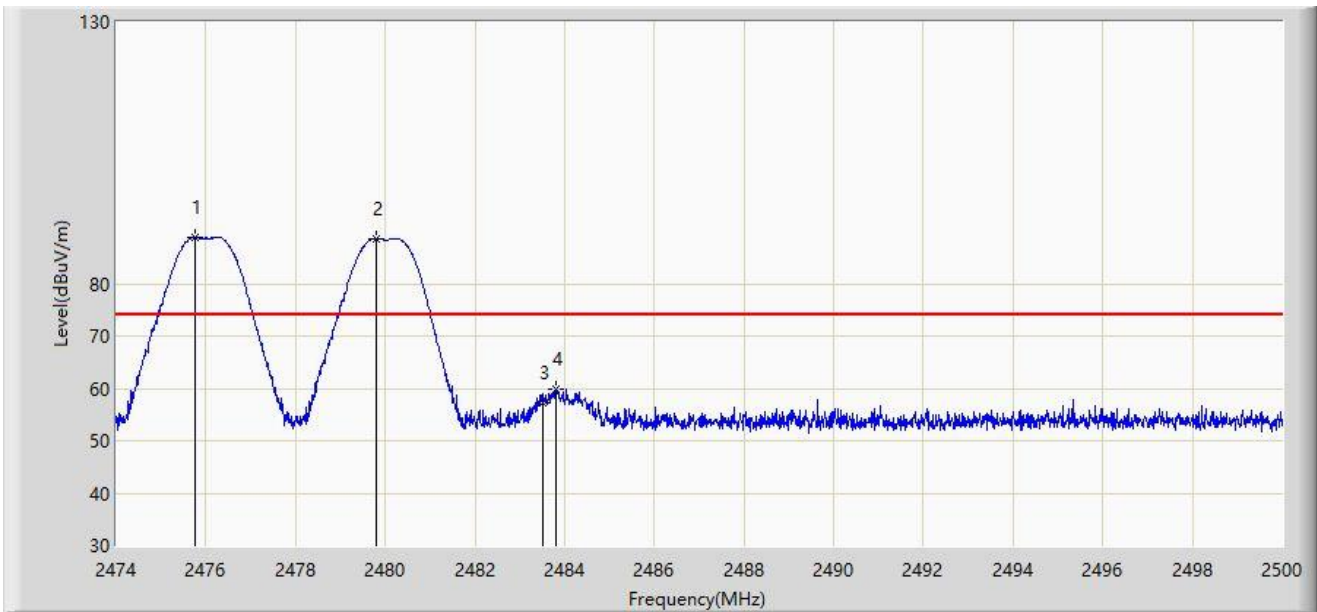


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2475.768	88.876	56.490	N/A	N/A	32.386	PK
2	*	2479.811	88.585	56.201	N/A	N/A	32.384	PK
3		2483.500	57.364	24.982	-16.636	74.000	32.382	PK
4		2483.802	59.988	27.606	-14.012	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2480MHz	

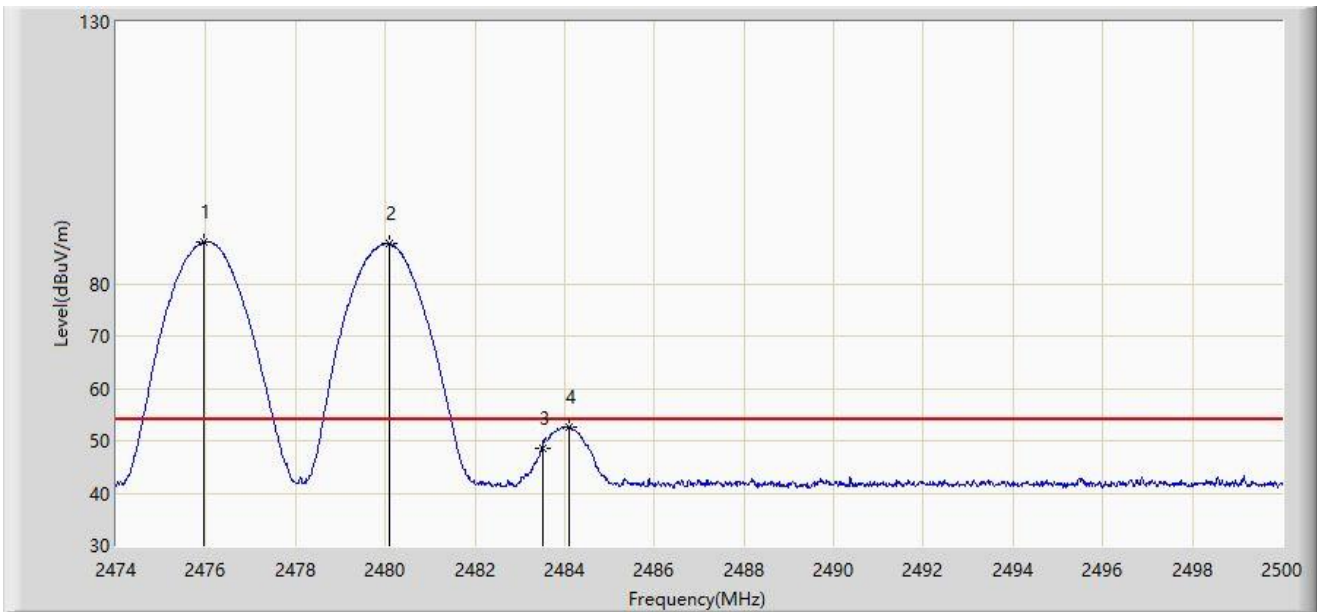


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2475.963	87.942	55.556	N/A	N/A	32.386	AV
2	*	2480.097	87.703	55.319	N/A	N/A	32.384	AV
3		2483.500	48.578	16.196	-5.422	54.000	32.382	AV
4		2484.101	52.544	20.162	-1.456	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2480MHz	

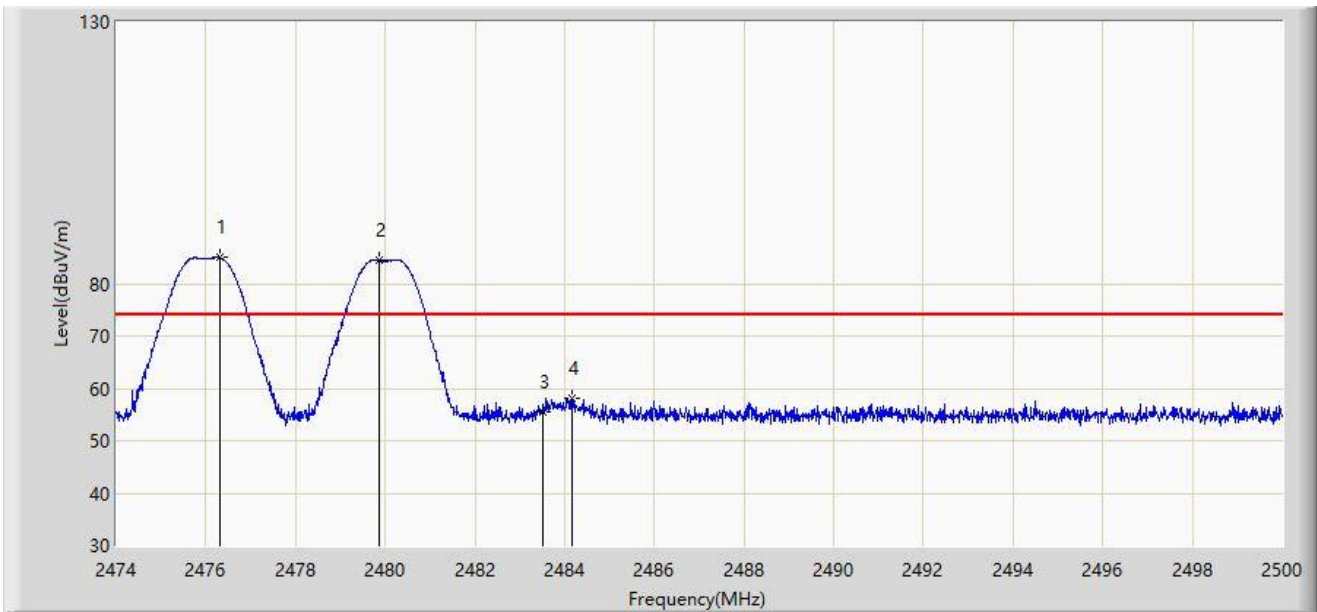


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2476.327	84.932	52.546	N/A	N/A	32.386	PK
2	*	2479.850	84.547	52.163	N/A	N/A	32.384	PK
3		2483.500	55.582	23.200	-18.418	74.000	32.382	PK
4		2484.153	58.110	25.728	-15.890	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 4# - 2480MHz	

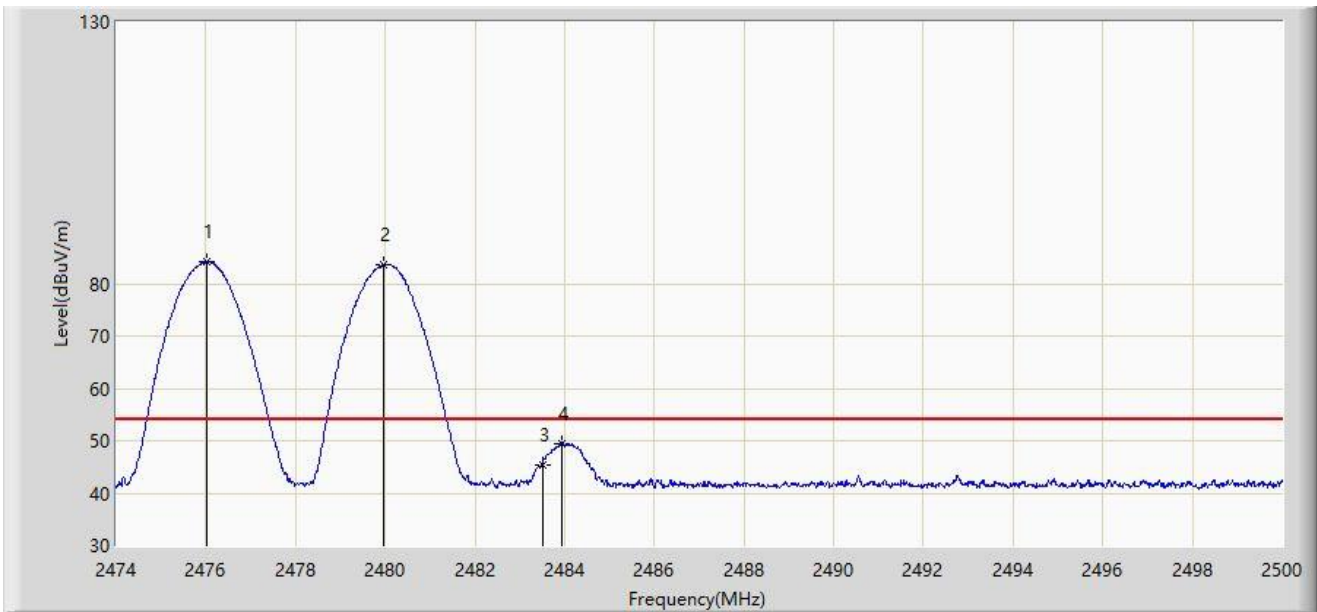


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2476.028	84.255	51.869	N/A	N/A	32.386	AV
2	*	2479.967	83.618	51.234	N/A	N/A	32.384	AV
3		2483.500	45.473	13.091	-8.527	54.000	32.382	AV
4		2483.932	49.557	17.175	-4.443	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2468MHz	

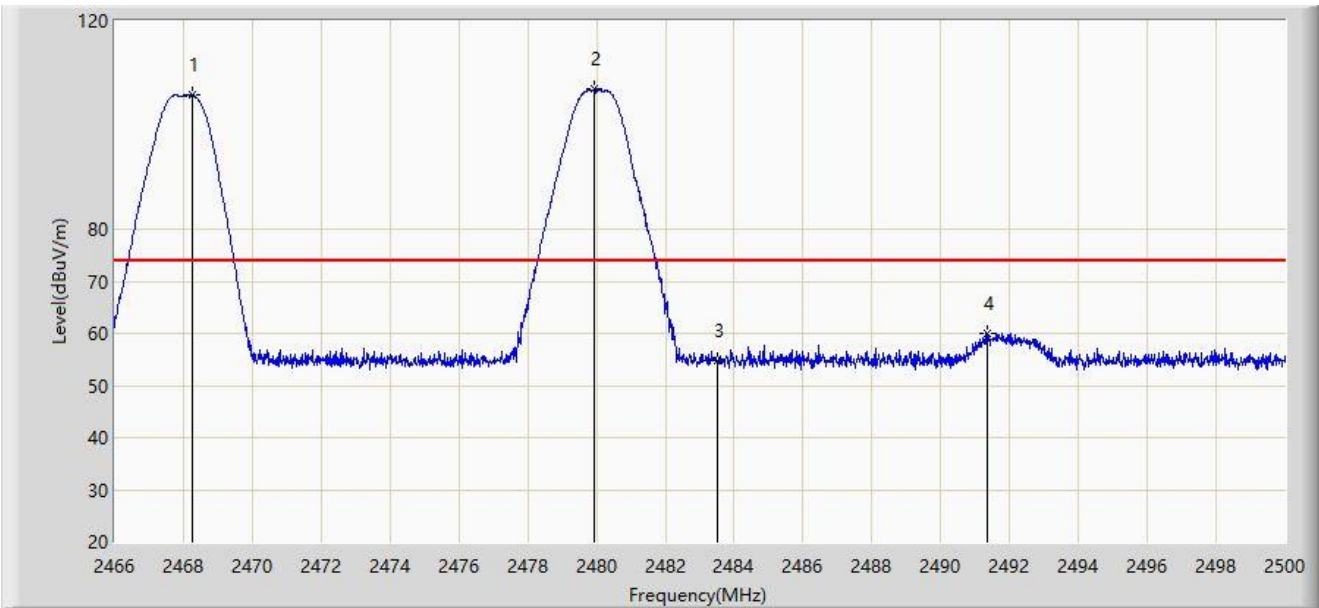


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2468.261	105.696	73.321	N/A	N/A	32.376	PK
2		2479.940	106.826	74.442	N/A	N/A	32.384	PK
3		2483.500	54.692	22.310	-19.308	74.000	32.382	PK
4		2491.347	60.081	27.702	-13.919	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2468MHz	

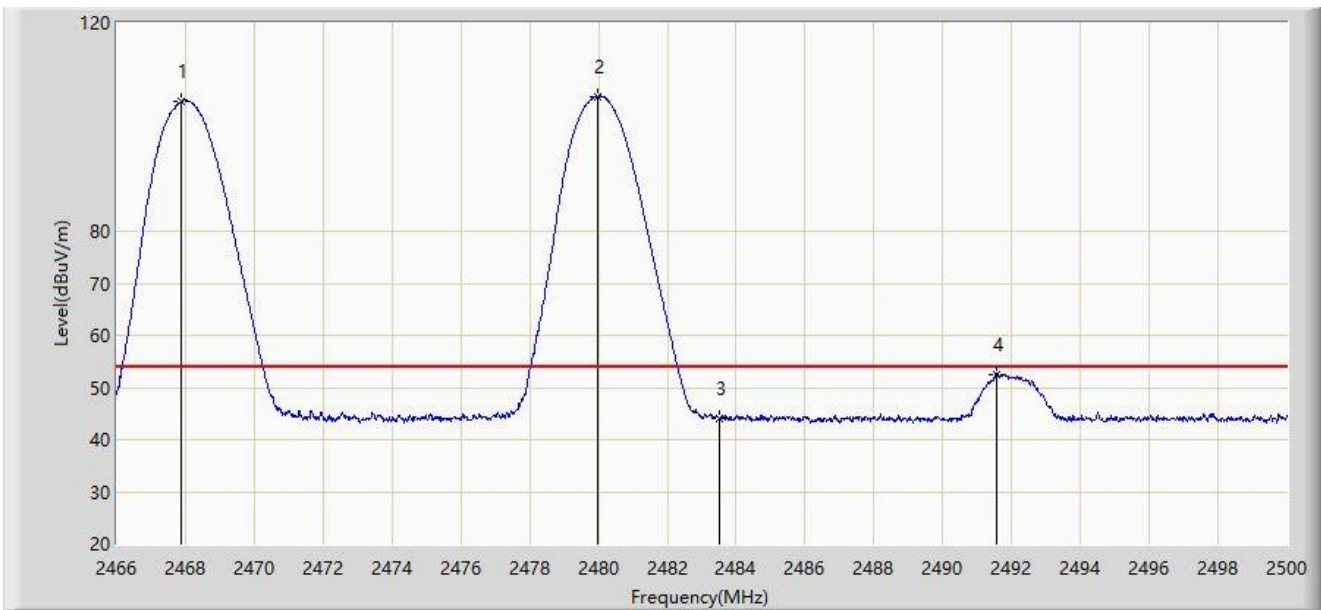


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2467.887	104.945	72.570	N/A	N/A	32.374	AV
2		2479.974	105.900	73.516	N/A	N/A	32.384	AV
3		2483.500	44.020	11.638	-9.980	54.000	32.382	AV
4		2491.551	52.578	20.199	-1.422	54.000	32.378	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2468MHz	

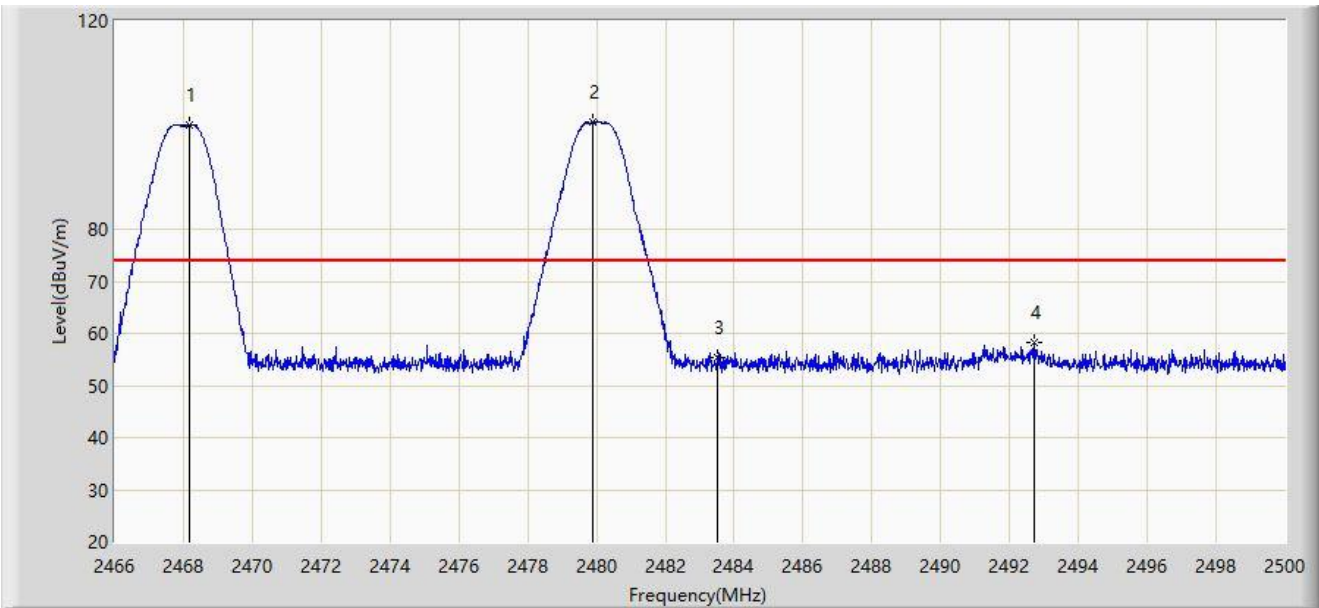


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2468.176	99.995	67.620	N/A	N/A	32.375	PK
2		2479.906	100.676	68.292	N/A	N/A	32.384	PK
3		2483.500	55.418	23.036	-18.582	74.000	32.382	PK
4		2492.724	58.215	25.834	-15.785	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2468MHz	

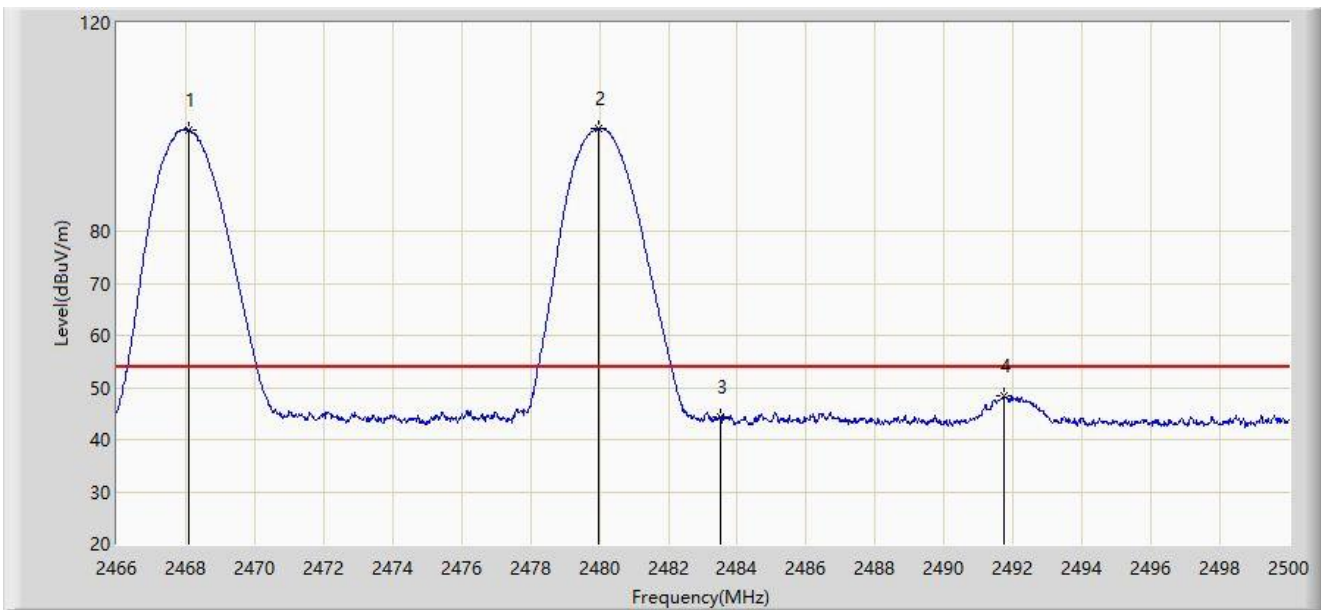


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2468.091	99.494	67.119	N/A	N/A	32.375	AV
2		2479.957	99.680	67.296	N/A	N/A	32.384	AV
3		2483.500	44.268	11.886	-9.732	54.000	32.382	AV
4		2491.721	48.434	16.055	-5.566	54.000	32.378	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2470MHz	

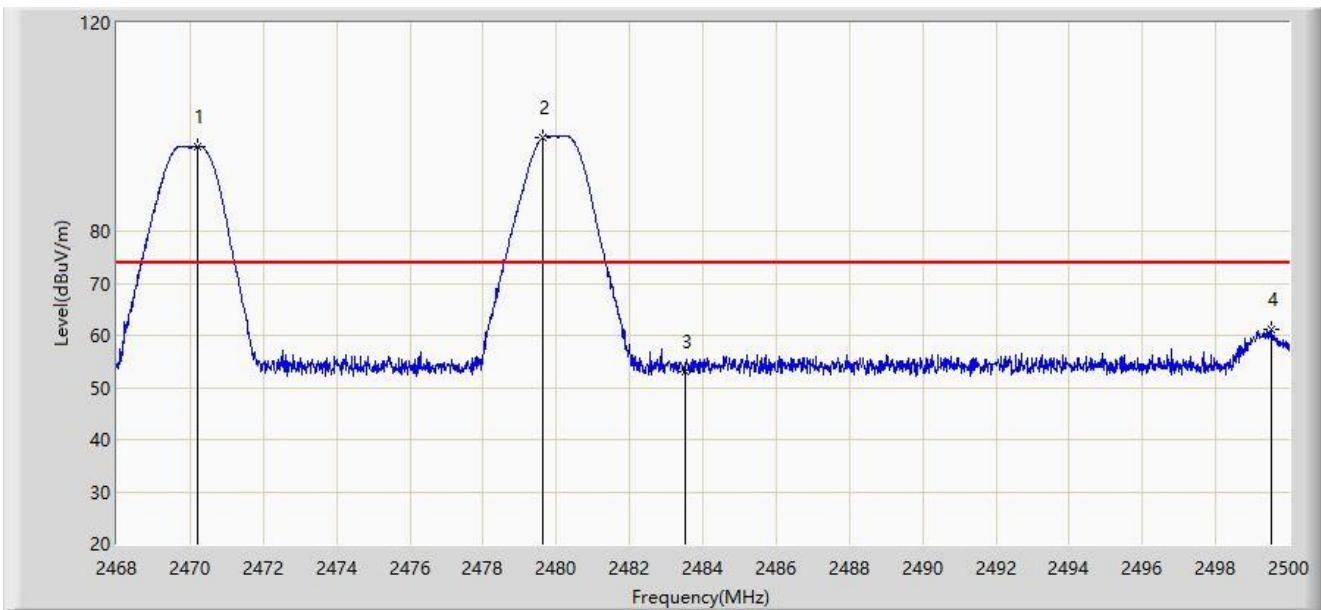


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2470.224	96.271	63.892	N/A	N/A	32.380	PK
2		2479.648	98.112	65.728	N/A	N/A	32.384	PK
3		2483.500	53.113	20.731	-20.887	74.000	32.382	PK
4		2499.504	61.148	28.742	-12.852	74.000	32.406	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2470MHz	

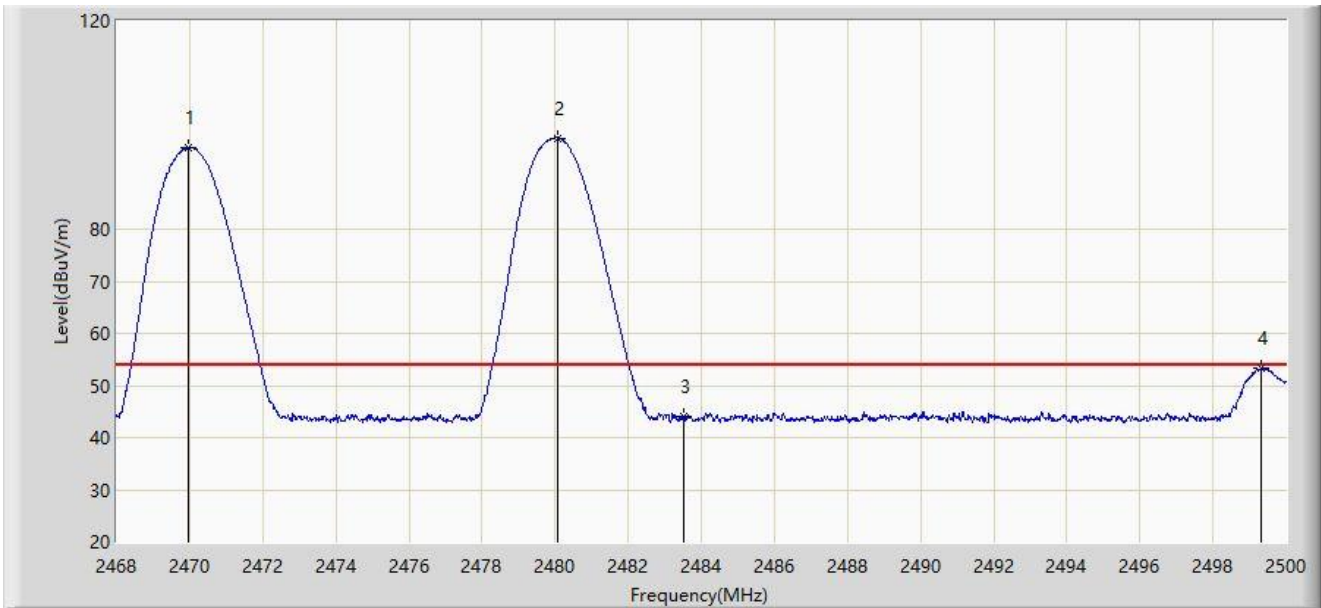


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2469.968	95.642	63.263	N/A	N/A	32.379	AV
2		2480.080	97.530	65.146	N/A	N/A	32.384	AV
3		2483.500	44.139	11.757	-9.861	54.000	32.382	AV
4		2499.312	53.404	20.999	-0.596	54.000	32.405	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2470MHz	

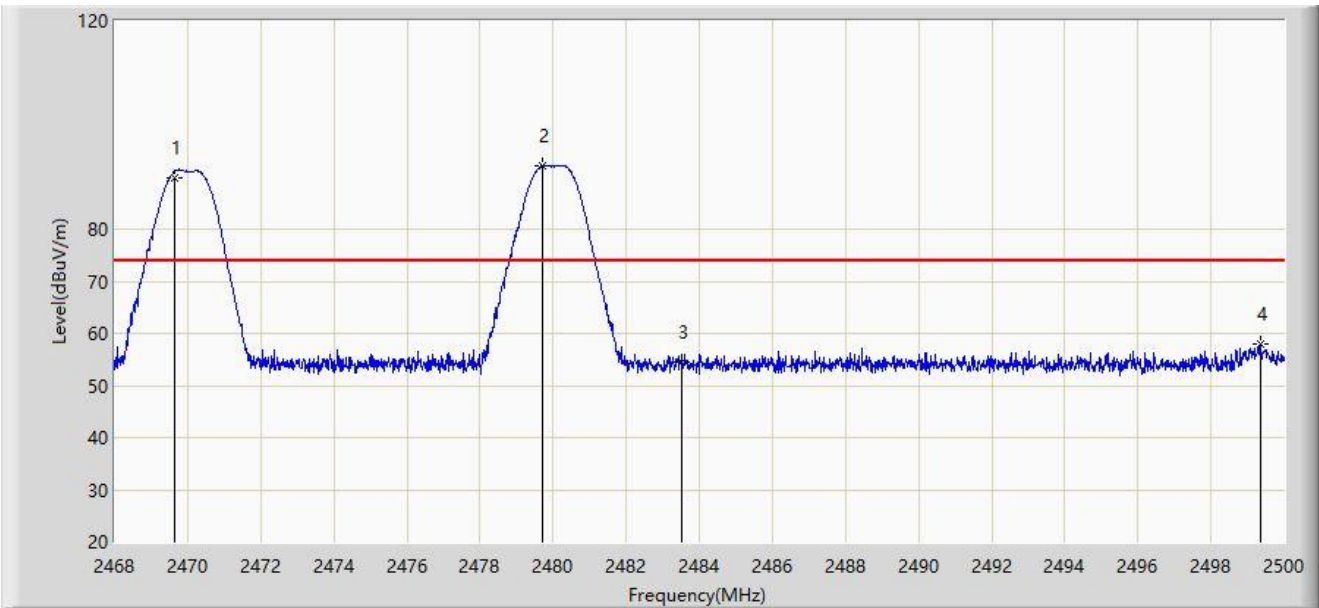


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2469.664	89.727	57.349	N/A	N/A	32.378	PK
2		2479.712	92.213	59.829	N/A	N/A	32.384	PK
3		2483.500	54.564	22.182	-19.436	74.000	32.382	PK
4		2499.344	57.859	25.454	-16.141	74.000	32.405	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2470MHz	

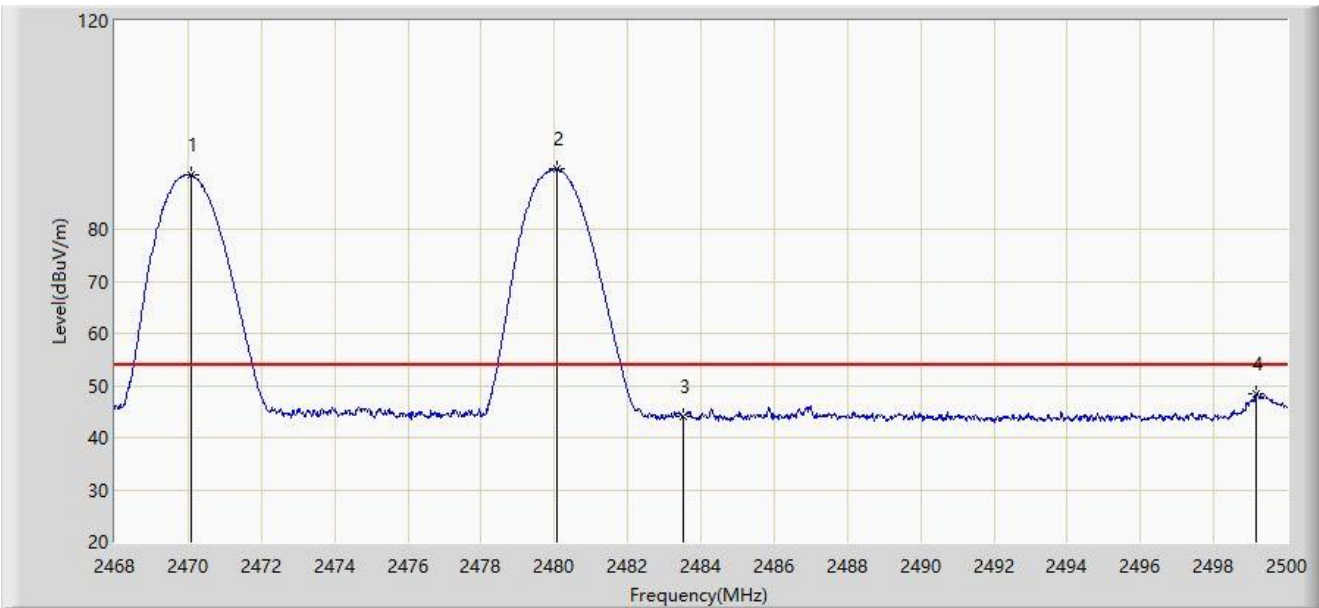


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2470.080	90.451	58.072	N/A	N/A	32.379	AV
2		2480.064	91.609	59.225	N/A	N/A	32.384	AV
3		2483.500	43.991	11.609	-10.009	54.000	32.382	AV
4		2499.168	48.422	16.018	-5.578	54.000	32.404	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2472MHz	

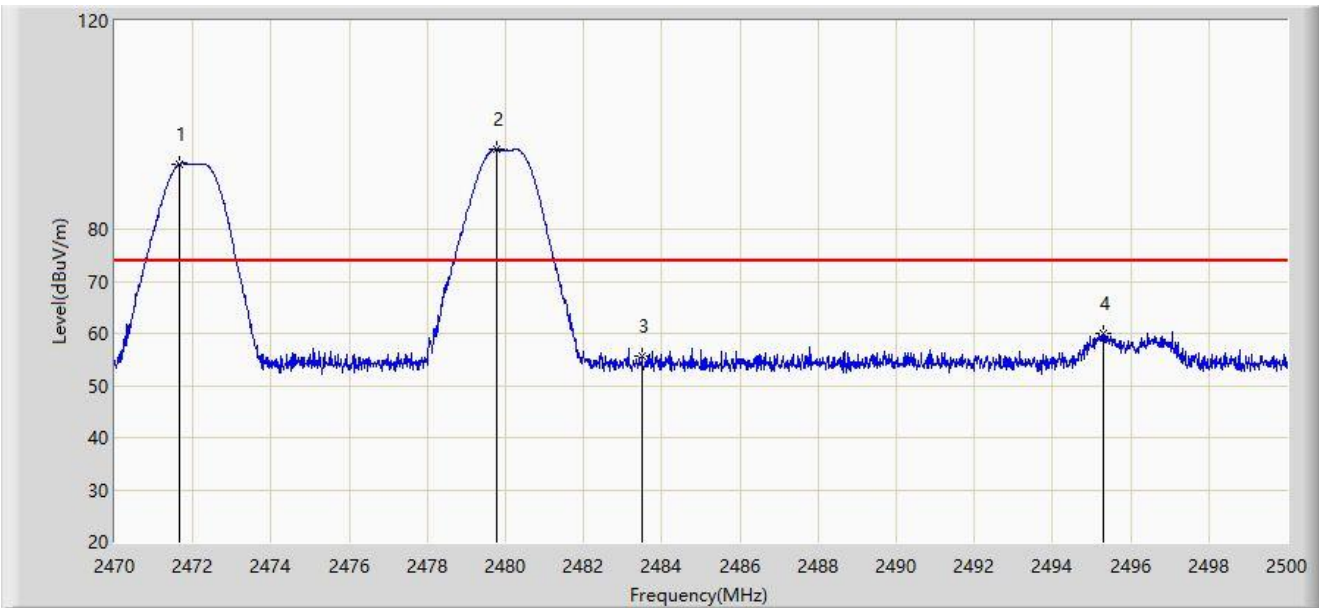


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2471.665	92.547	60.165	N/A	N/A	32.382	PK
2		2479.780	95.392	63.008	N/A	N/A	32.384	PK
3		2483.500	55.659	23.277	-18.341	74.000	32.382	PK
4		2495.305	60.097	27.708	-13.903	74.000	32.389	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2472MHz	

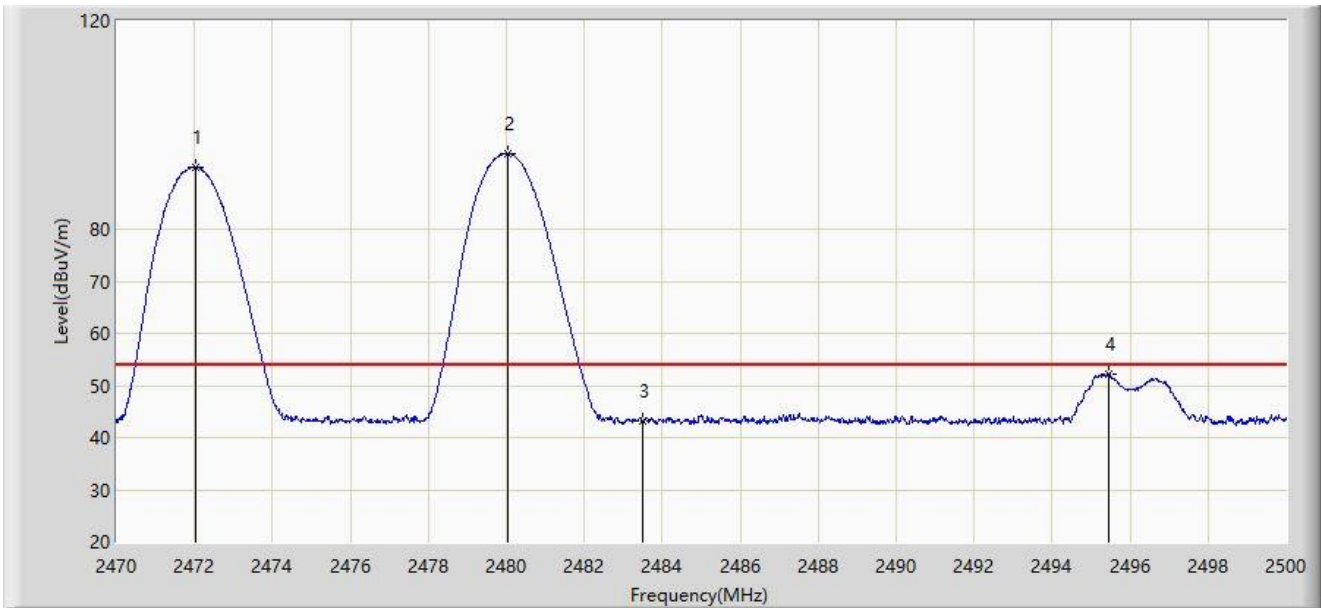


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2472.040	91.926	59.543	N/A	N/A	32.383	AV
2		2480.020	94.548	62.164	N/A	N/A	32.384	AV
3		2483.500	43.048	10.666	-10.952	54.000	32.382	AV
4		2495.440	52.214	19.824	-1.786	54.000	32.390	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2472MHz	

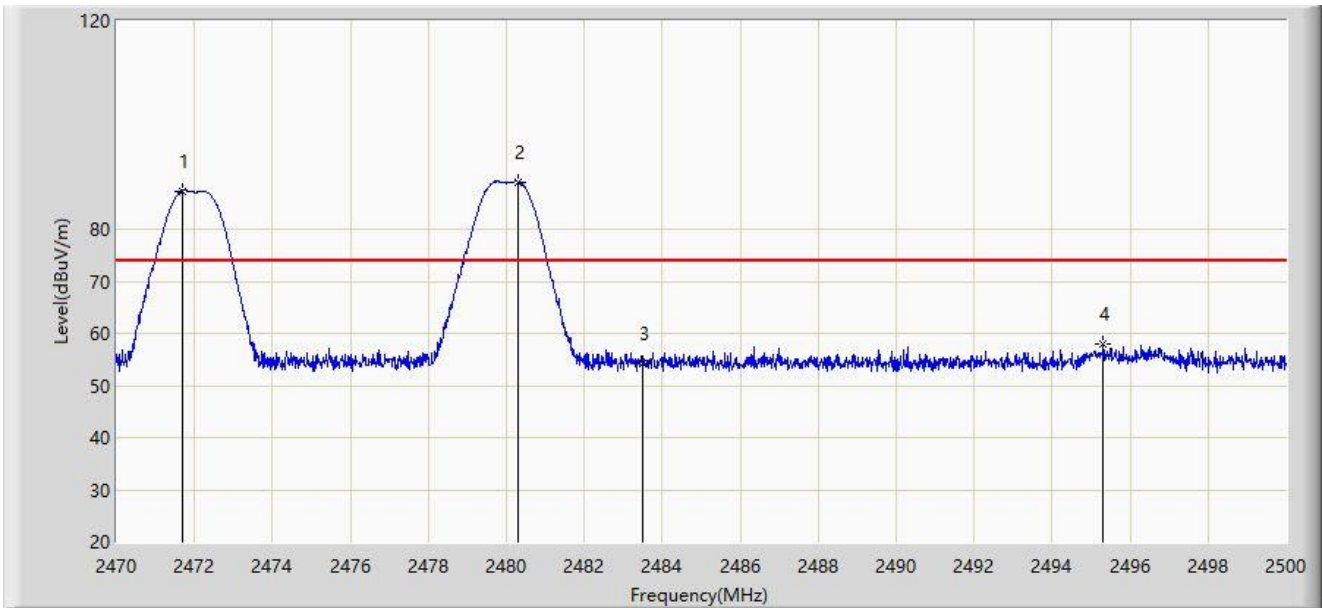


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2471.680	87.332	54.950	N/A	N/A	32.382	PK
2		2480.290	89.122	56.738	N/A	N/A	32.384	PK
3		2483.500	54.099	21.717	-19.901	74.000	32.382	PK
4		2495.305	58.073	25.684	-15.927	74.000	32.389	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2472MHz	

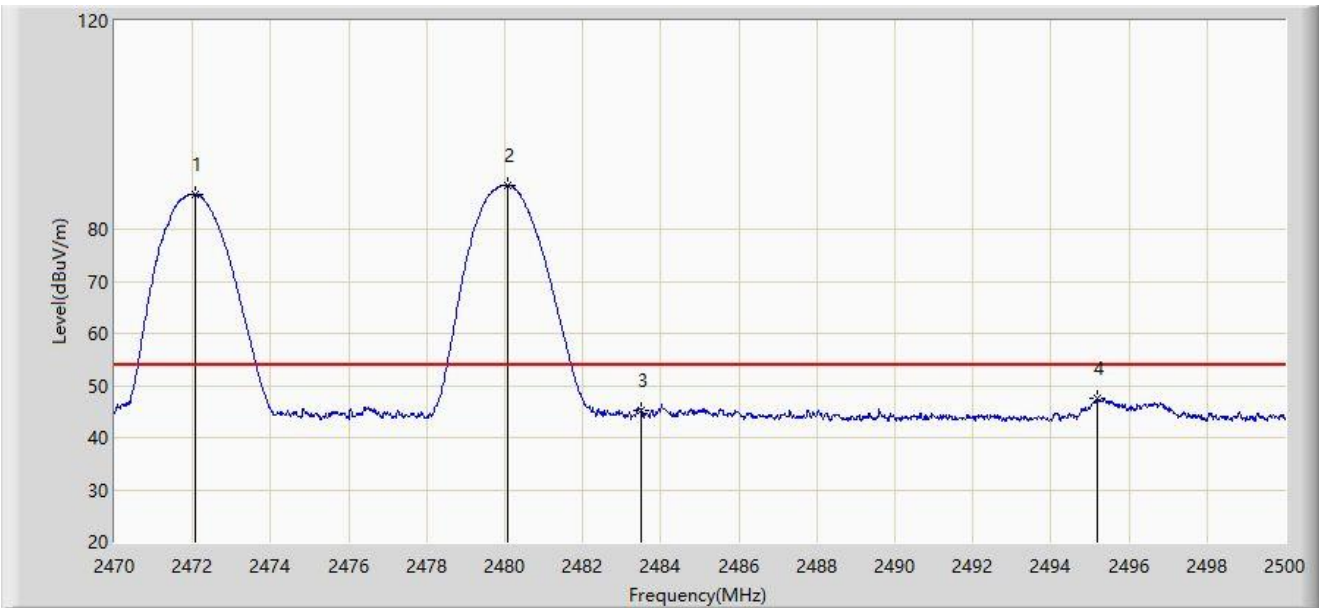


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2472.085	86.674	54.291	N/A	N/A	32.383	AV
2		2480.065	88.492	56.108	N/A	N/A	32.384	AV
3		2483.500	45.224	12.842	-8.776	54.000	32.382	AV
4		2495.185	47.563	15.174	-6.437	54.000	32.389	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

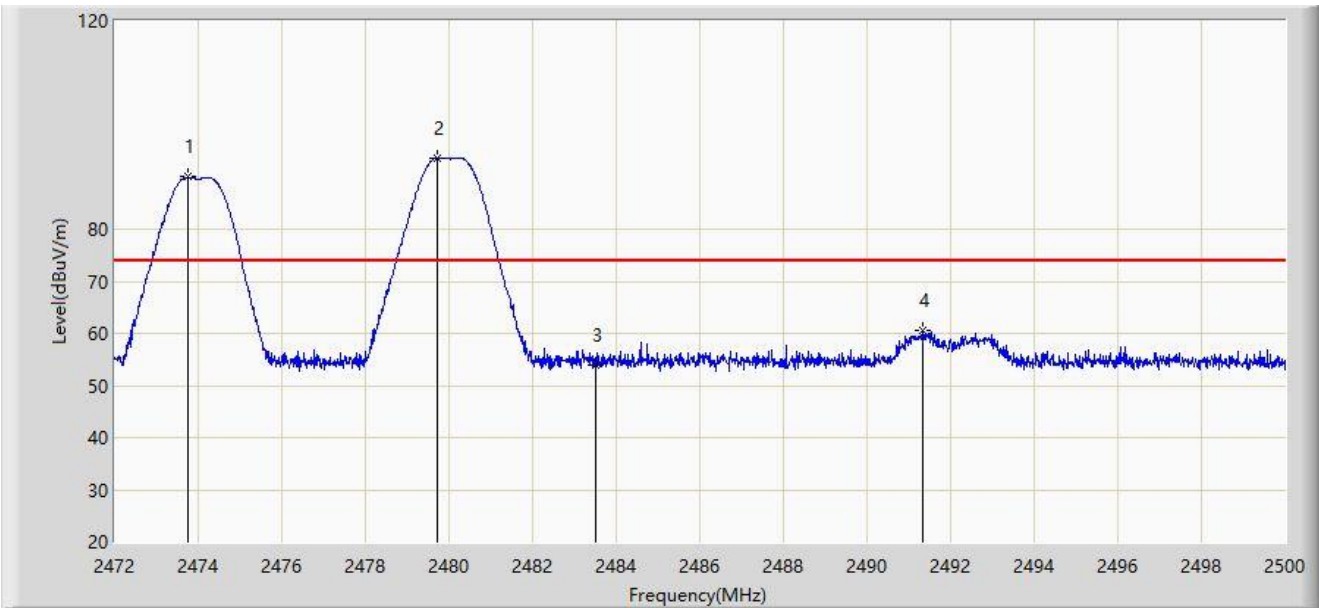


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2473.750	90.046	57.659	N/A	N/A	32.386	PK
2		2479.728	93.759	61.375	N/A	N/A	32.384	PK
3		2483.500	53.773	21.391	-20.227	74.000	32.382	PK
4		2491.334	60.677	28.298	-13.323	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

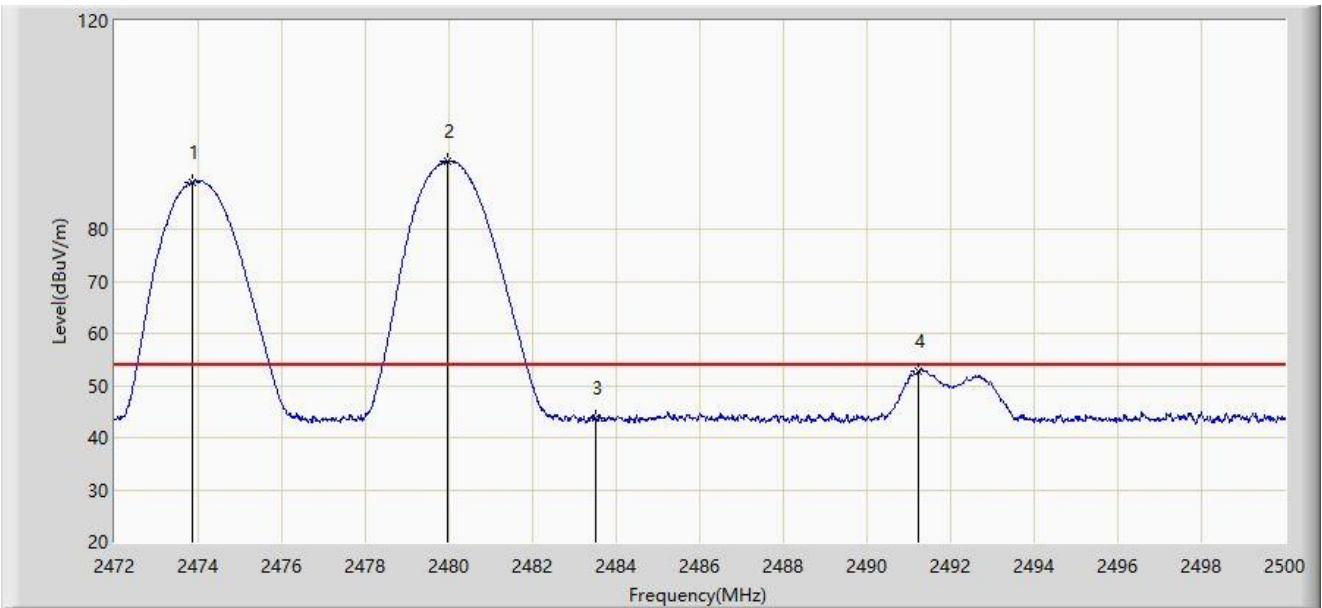


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2473.876	89.121	56.734	N/A	N/A	32.387	AV
2		2479.952	93.020	60.636	N/A	N/A	32.384	AV
3		2483.500	43.693	11.311	-10.307	54.000	32.382	AV
4		2491.236	52.886	20.507	-1.114	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

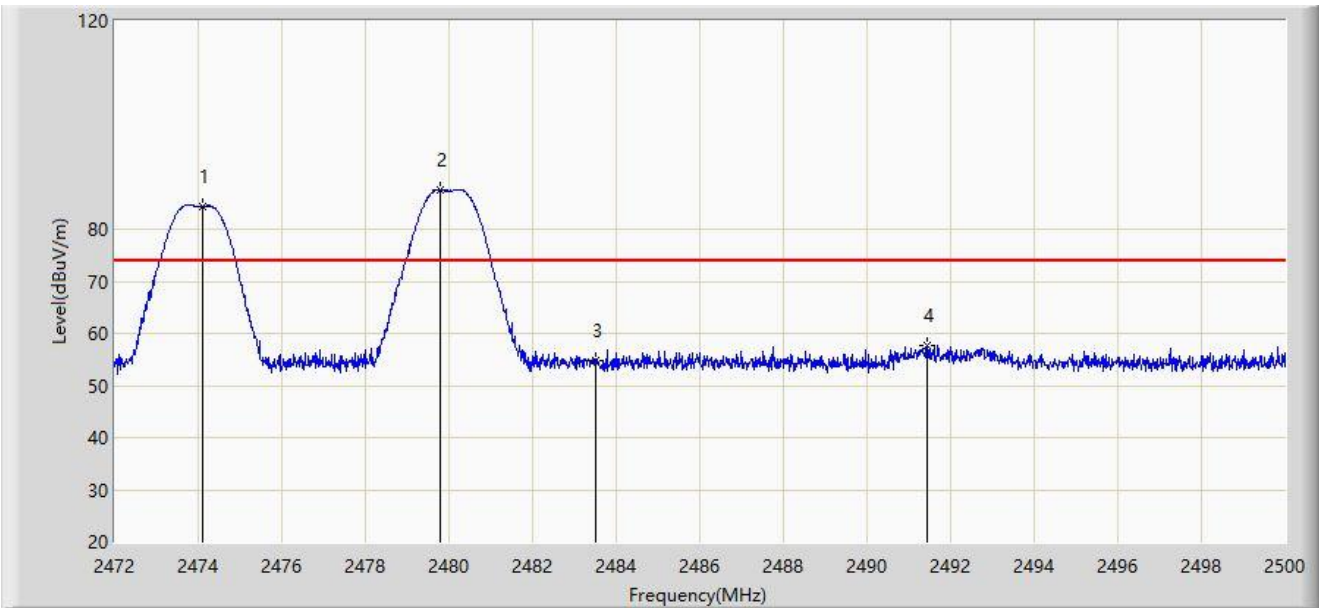


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2474.100	84.454	52.067	N/A	N/A	32.387	PK
2		2479.784	87.548	55.164	N/A	N/A	32.384	PK
3		2483.500	54.771	22.389	-19.229	74.000	32.382	PK
4		2491.432	57.779	25.400	-16.221	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2474MHz	

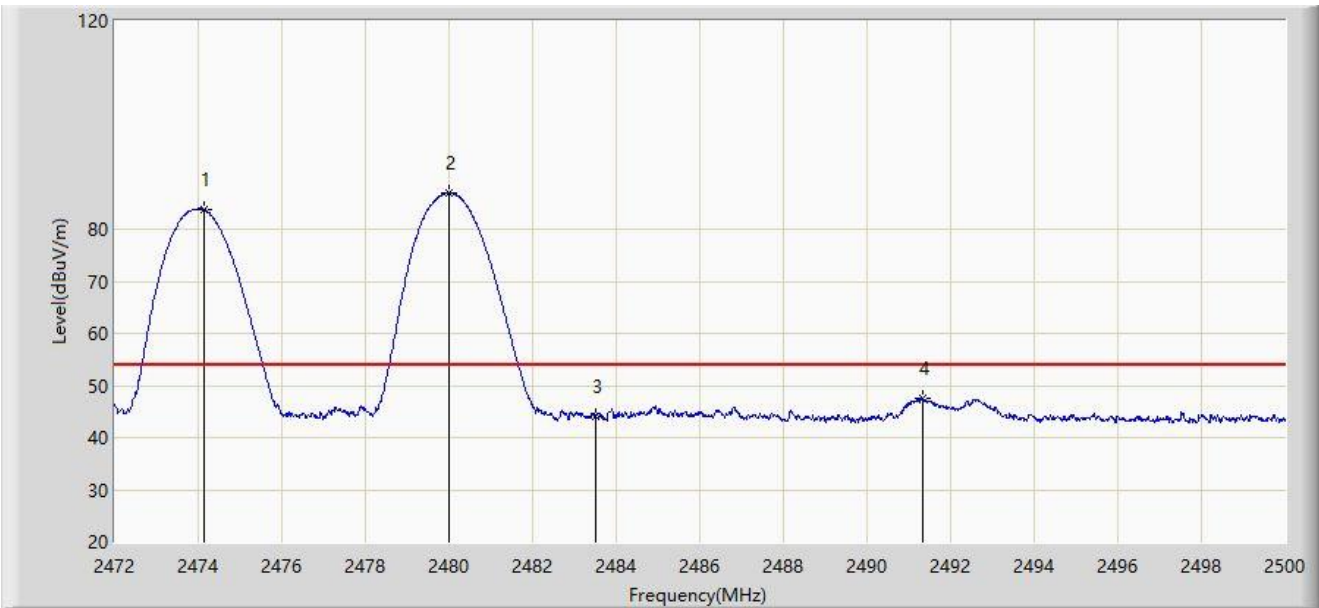


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2474.128	83.861	51.474	N/A	N/A	32.387	AV
2		2479.994	86.952	54.568	N/A	N/A	32.384	AV
3		2483.500	44.161	11.779	-9.839	54.000	32.382	AV
4		2491.320	47.500	15.121	-6.500	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

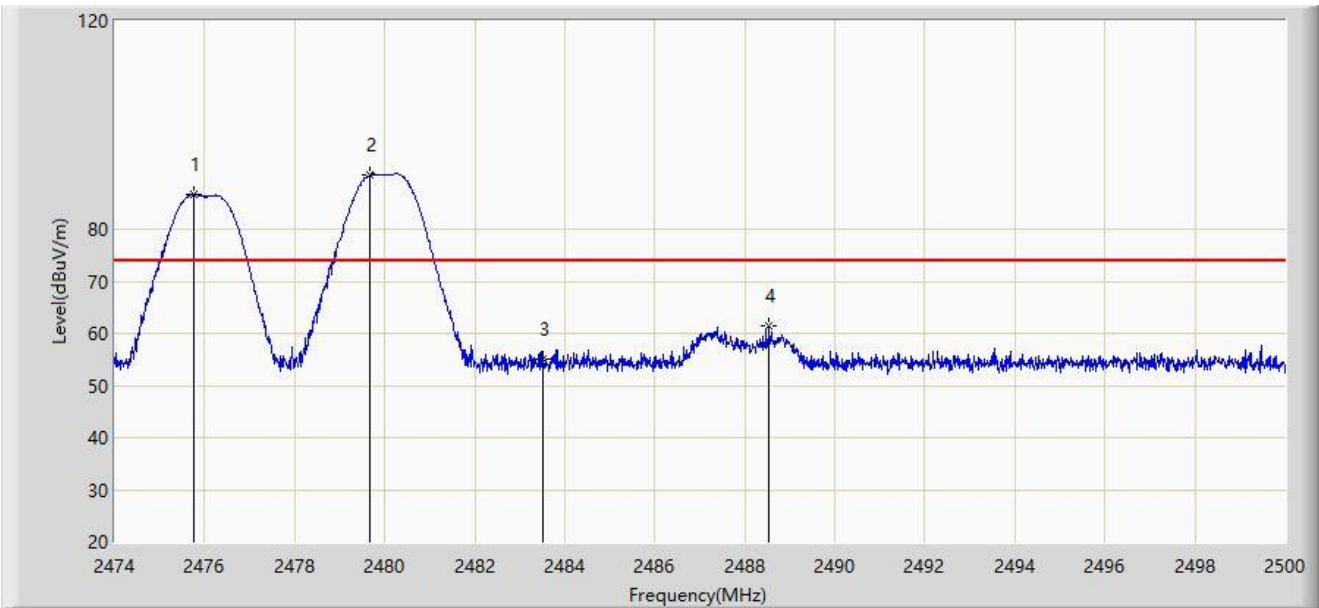


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2475.768	86.628	54.242	N/A	N/A	32.386	PK
2		2479.655	90.359	57.975	N/A	N/A	32.384	PK
3		2483.500	55.125	22.743	-18.875	74.000	32.382	PK
4		2488.547	61.471	29.091	-12.529	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

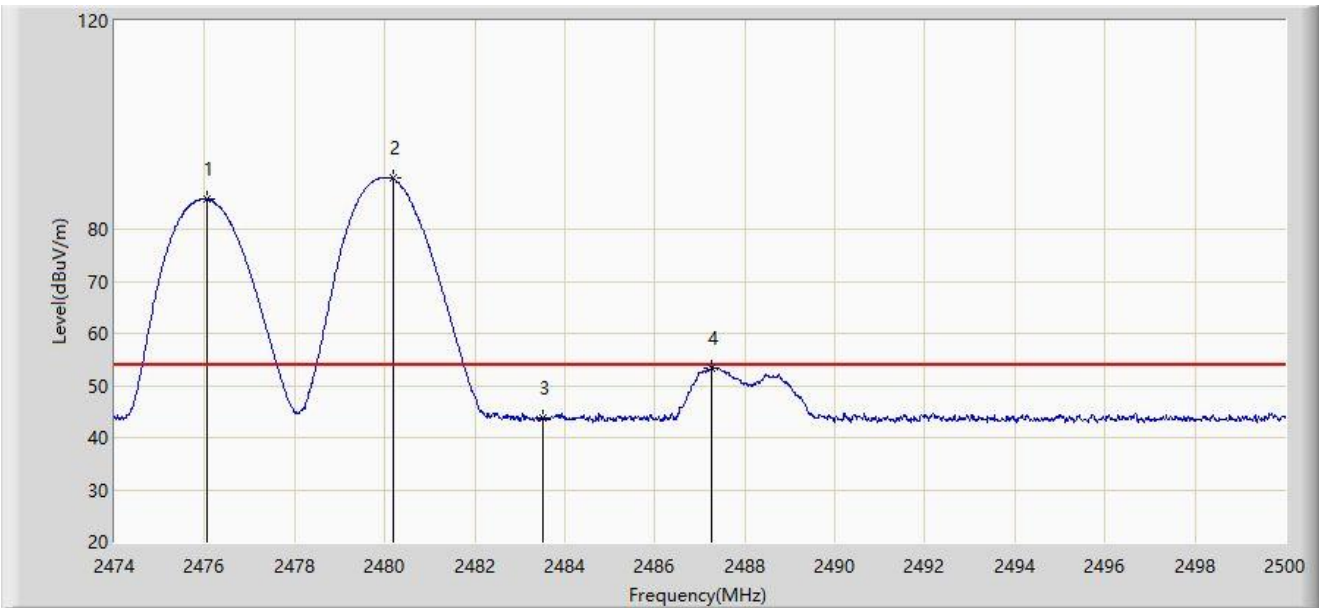


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2476.054	85.860	53.474	N/A	N/A	32.386	AV
2		2480.175	89.726	57.342	N/A	N/A	32.384	AV
3		2483.500	43.796	11.414	-10.204	54.000	32.382	AV
4		2487.260	53.412	21.031	-0.588	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

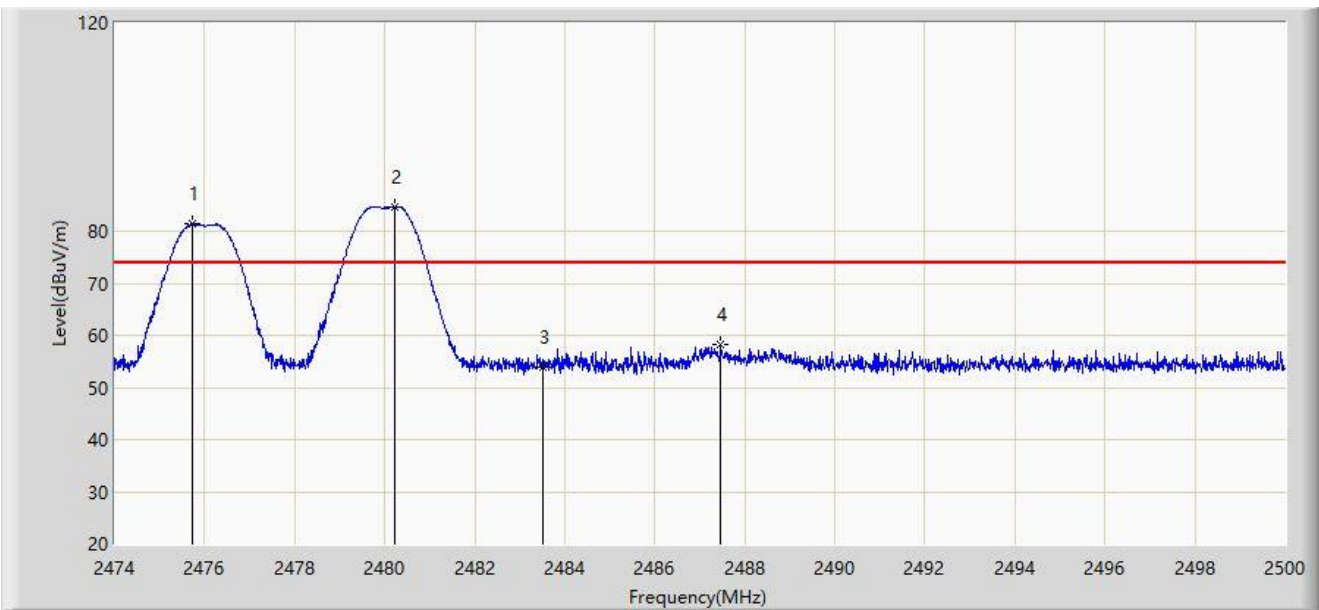


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2475.742	81.433	49.047	N/A	N/A	32.386	PK
2		2480.227	84.777	52.393	N/A	N/A	32.384	PK
3		2483.500	53.835	21.453	-20.165	74.000	32.382	PK
4		2487.455	58.142	25.761	-15.858	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2476MHz	

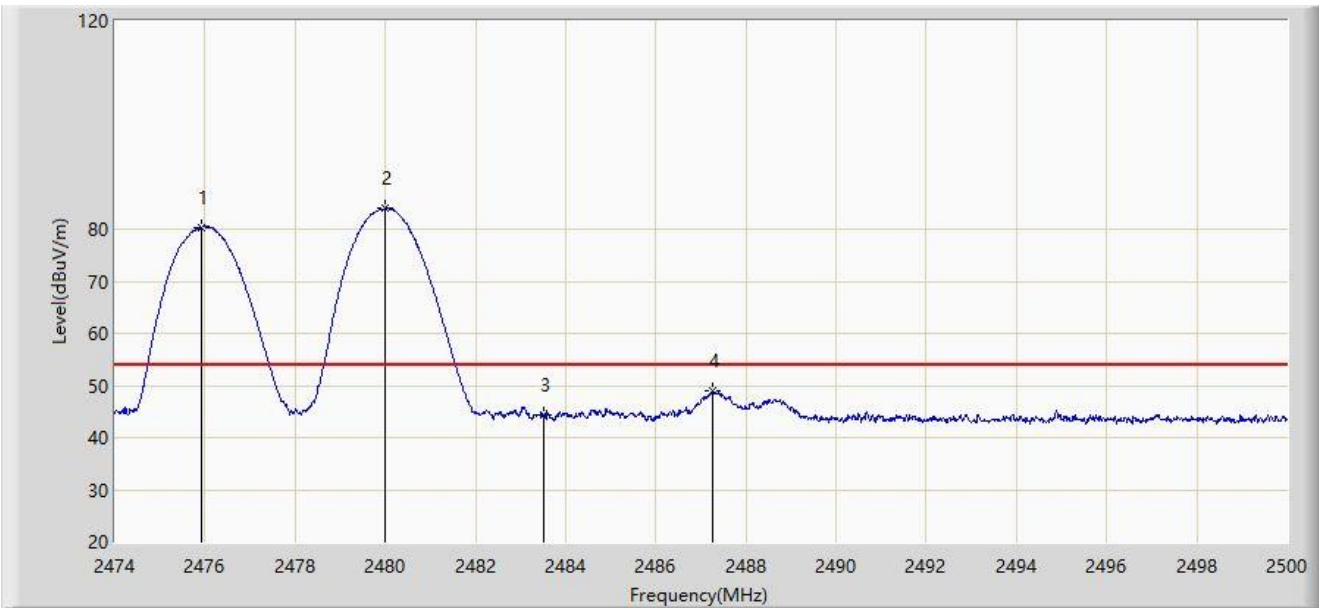


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2475.937	80.409	48.023	N/A	N/A	32.386	AV
2		2480.006	83.925	51.541	N/A	N/A	32.384	AV
3		2483.500	44.267	11.885	-9.733	54.000	32.382	AV
4		2487.247	49.093	16.712	-4.907	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

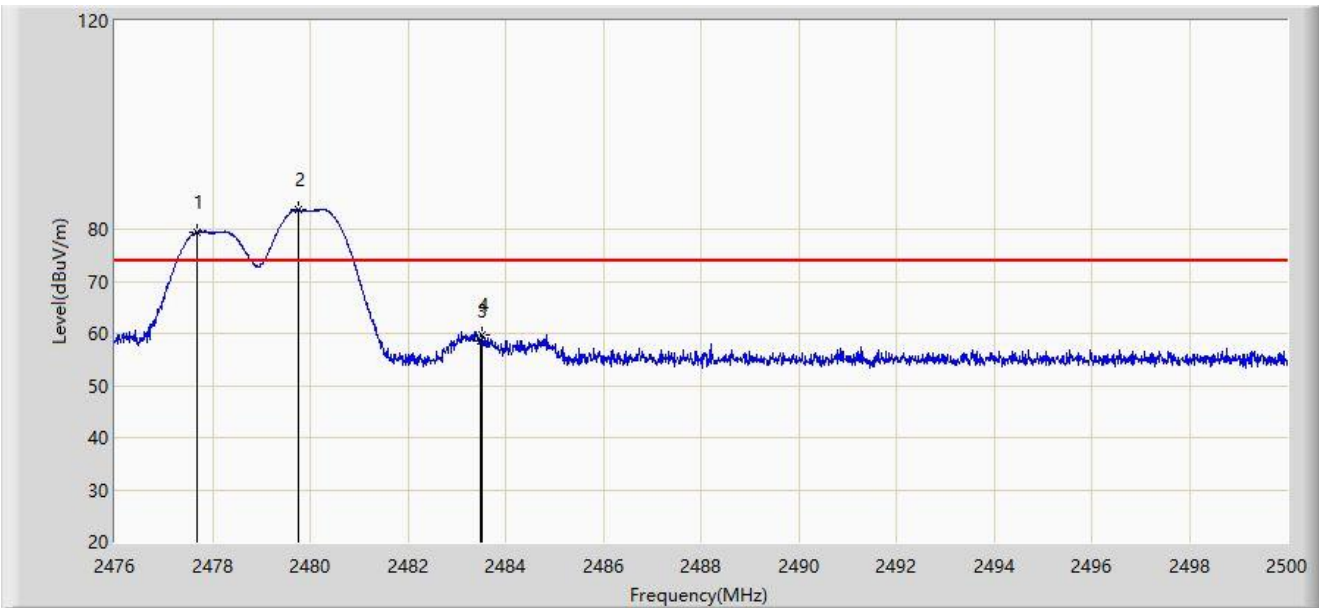


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2477.680	79.546	47.161	N/A	N/A	32.385	PK
2		2479.756	83.713	51.329	N/A	N/A	32.384	PK
3		2483.500	58.660	26.278	-15.340	74.000	32.382	PK
4		2483.524	59.731	27.349	-14.269	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

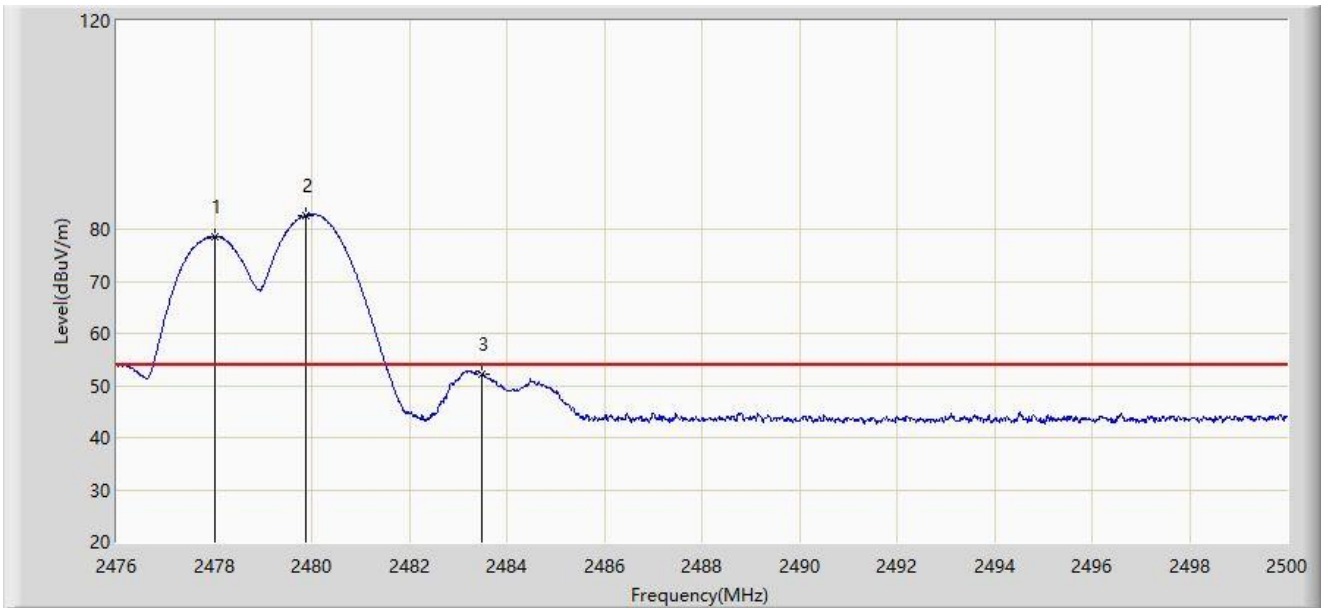


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2478.004	78.567	46.182	N/A	N/A	32.385	AV
2		2479.876	82.586	50.202	N/A	N/A	32.384	AV
3		2483.500	52.207	19.825	-1.793	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

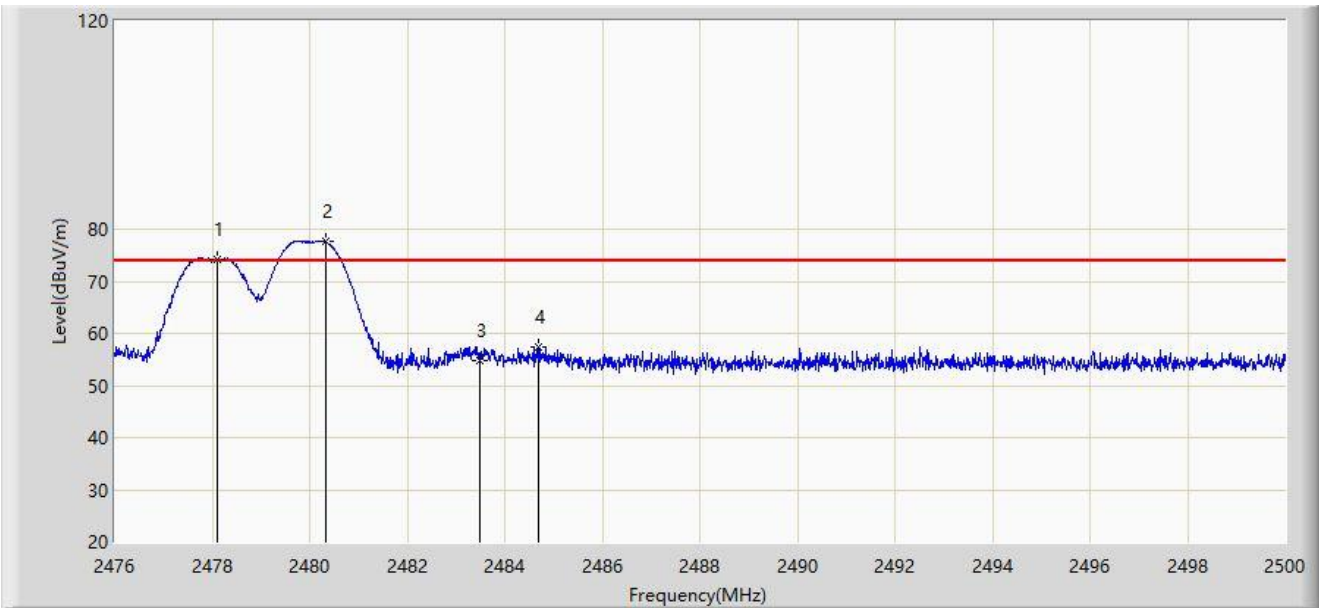


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2478.100	74.291	41.906	N/A	N/A	32.385	PK
2		2480.332	77.653	45.269	N/A	N/A	32.384	PK
3		2483.500	54.665	22.283	-19.335	74.000	32.382	PK
4		2484.688	57.401	25.019	-16.599	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-03
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 3# - 2480MHz Ant 8 - Filter 4# - 2478MHz	

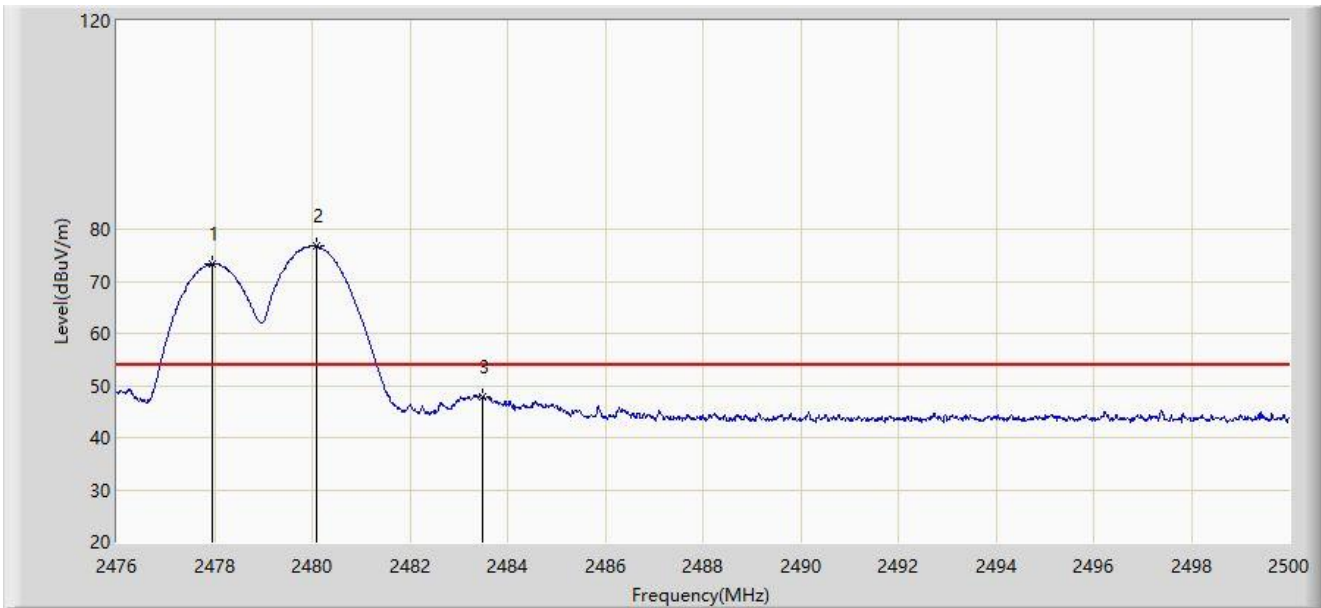


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2477.944	73.272	40.887	N/A	N/A	32.385	AV
2		2480.092	76.718	44.334	N/A	N/A	32.384	AV
3		2483.500	47.833	15.451	-6.167	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 6# - 2480MHz	

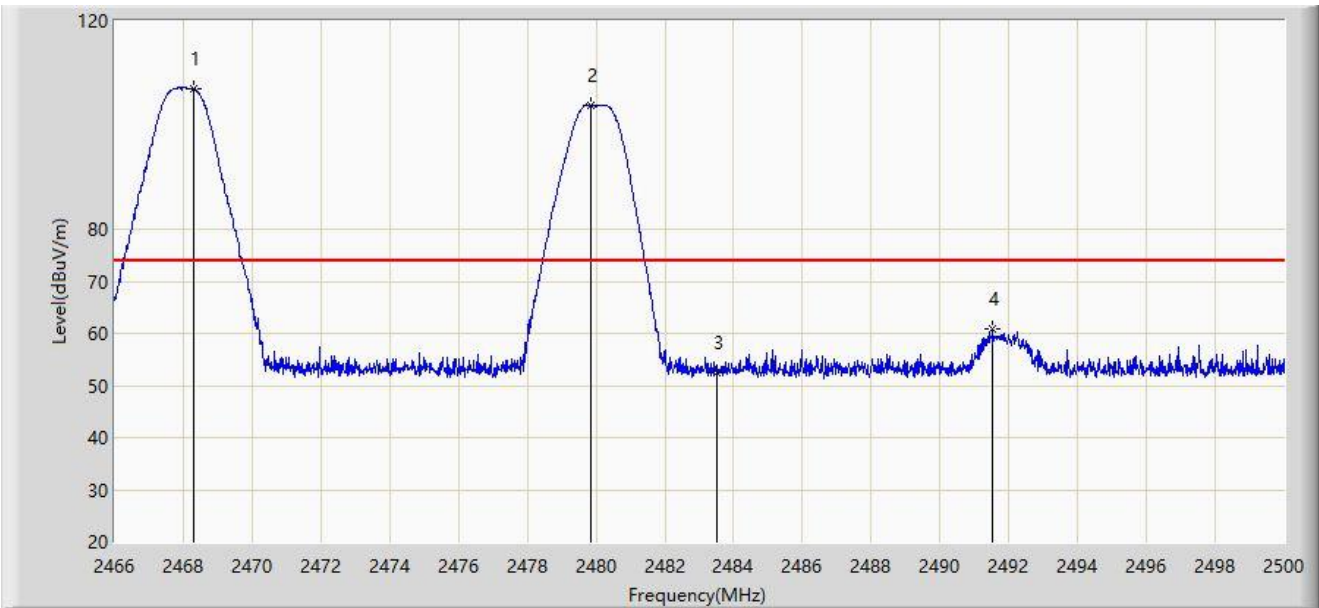


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2468.312	106.925	74.550	N/A	N/A	32.376	PK
2	*	2479.838	103.758	71.374	29.758	74.000	32.384	PK
3		2483.500	52.389	20.007	-21.611	74.000	32.382	PK
4		2491.517	60.918	28.539	-13.082	74.000	32.378	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 6# - 2480MHz	

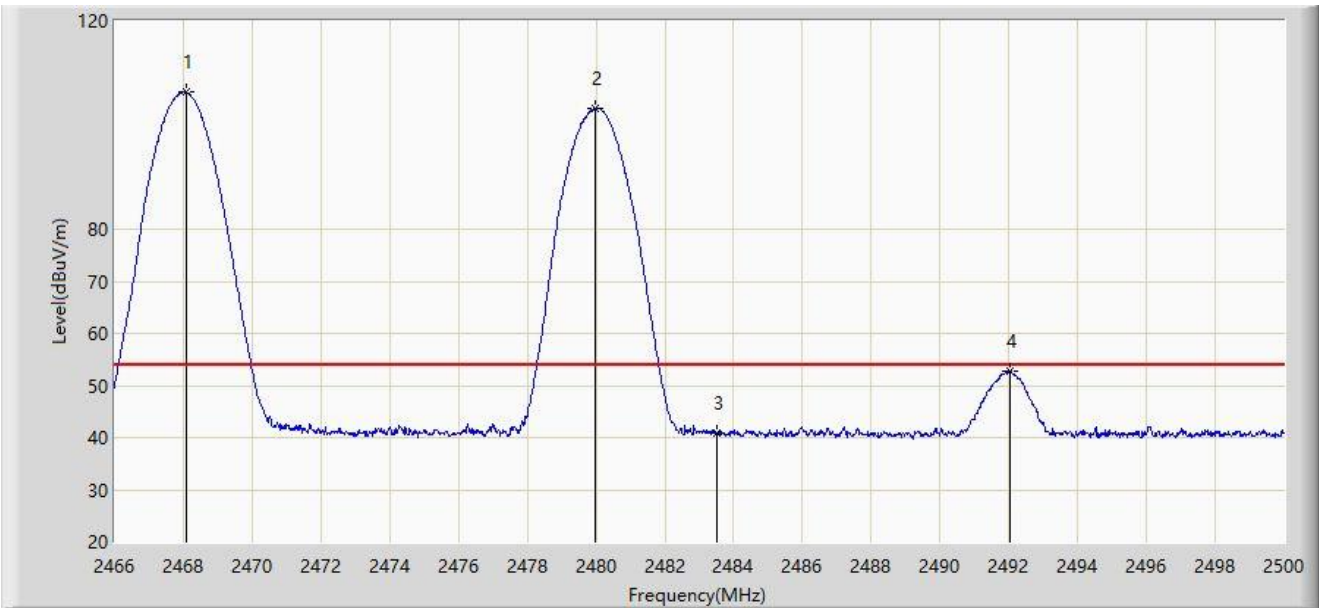


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2468.091	106.300	73.925	N/A	N/A	32.375	AV
2	*	2479.974	103.121	70.737	49.121	54.000	32.384	AV
3		2483.500	40.975	8.593	-13.025	54.000	32.382	AV
4		2492.044	52.866	20.487	-1.134	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 6# - 2480MHz	

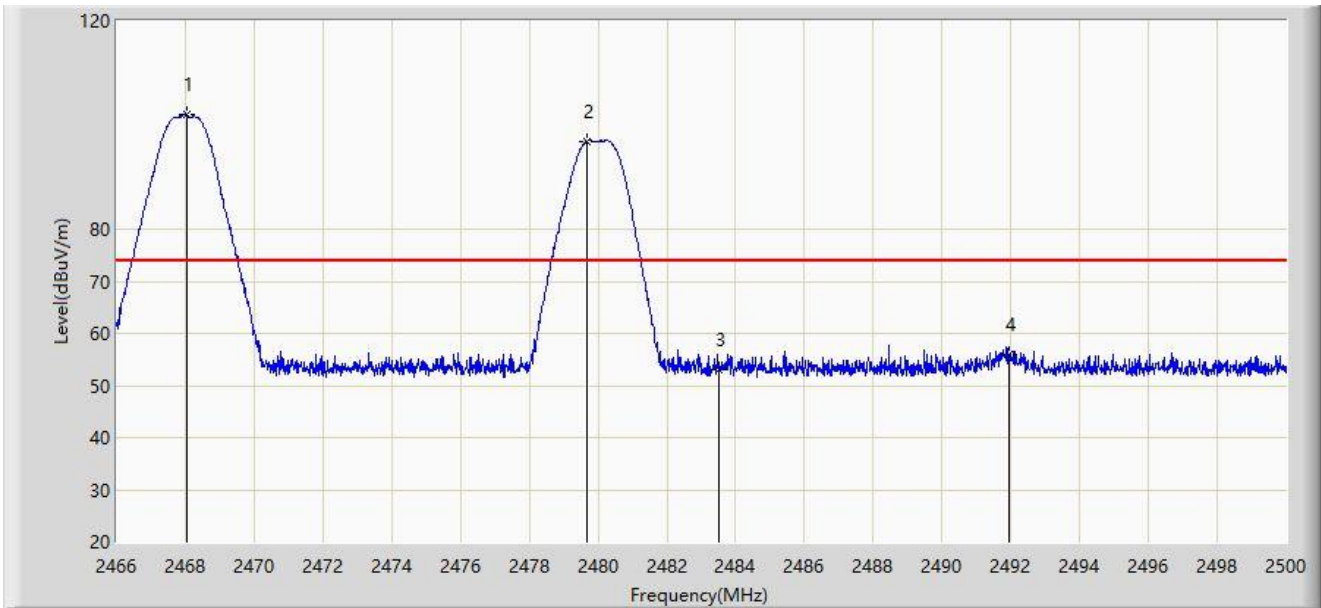


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2468.040	101.914	69.539	N/A	N/A	32.375	PK
2	*	2479.685	96.896	64.512	22.896	74.000	32.384	PK
3		2483.500	52.976	20.594	-21.024	74.000	32.382	PK
4		2491.942	55.965	23.586	-18.035	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2468MHz Ant 8 - Filter 6# - 2480MHz	

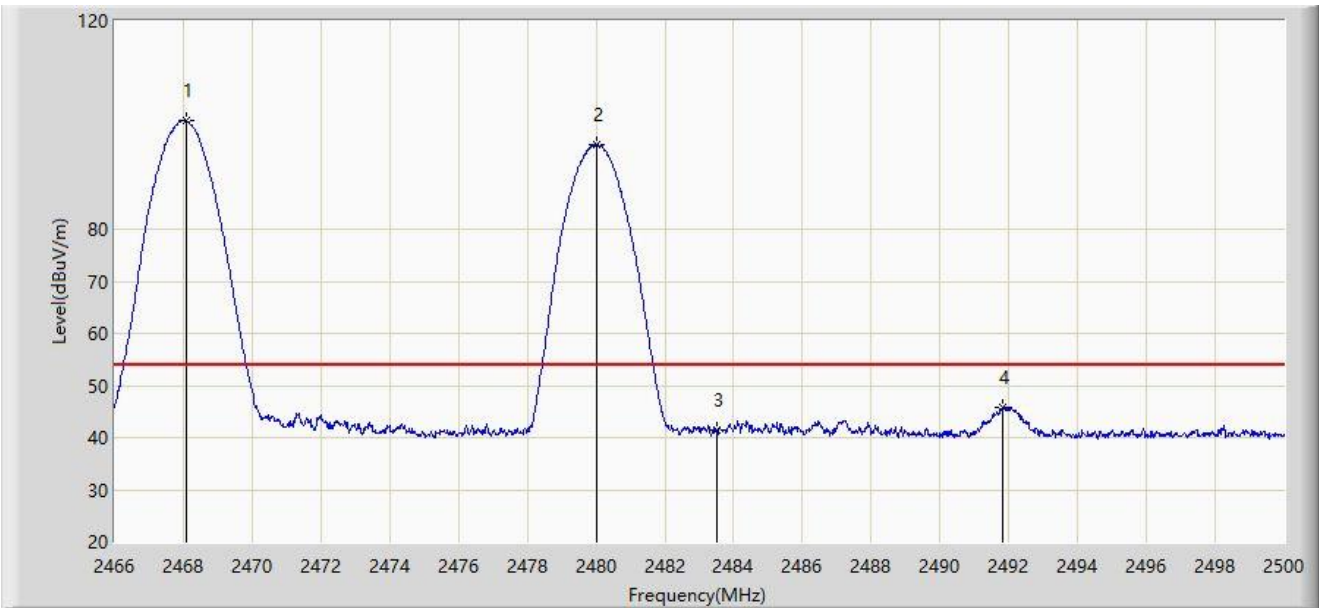


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2468.091	100.756	68.381	N/A	N/A	32.375	AV
2	*	2480.025	96.299	63.915	42.299	54.000	32.384	AV
3		2483.500	41.574	9.192	-12.426	54.000	32.382	AV
4		2491.840	45.751	13.373	-8.249	54.000	32.378	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 6# - 2480MHz	

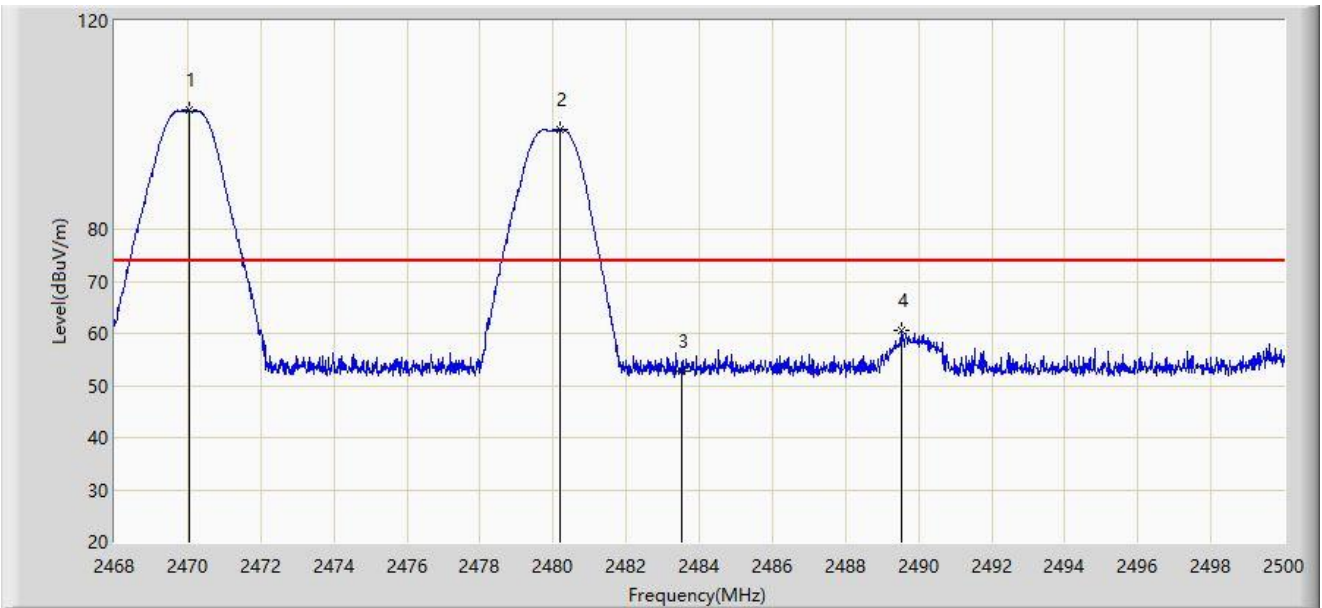


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2470.048	102.775	70.396	N/A	N/A	32.379	PK
2	*	2480.176	99.046	66.662	25.046	74.000	32.384	PK
3		2483.500	52.650	20.268	-21.350	74.000	32.382	PK
4		2489.520	60.498	28.118	-13.502	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 6# - 2480MHz	

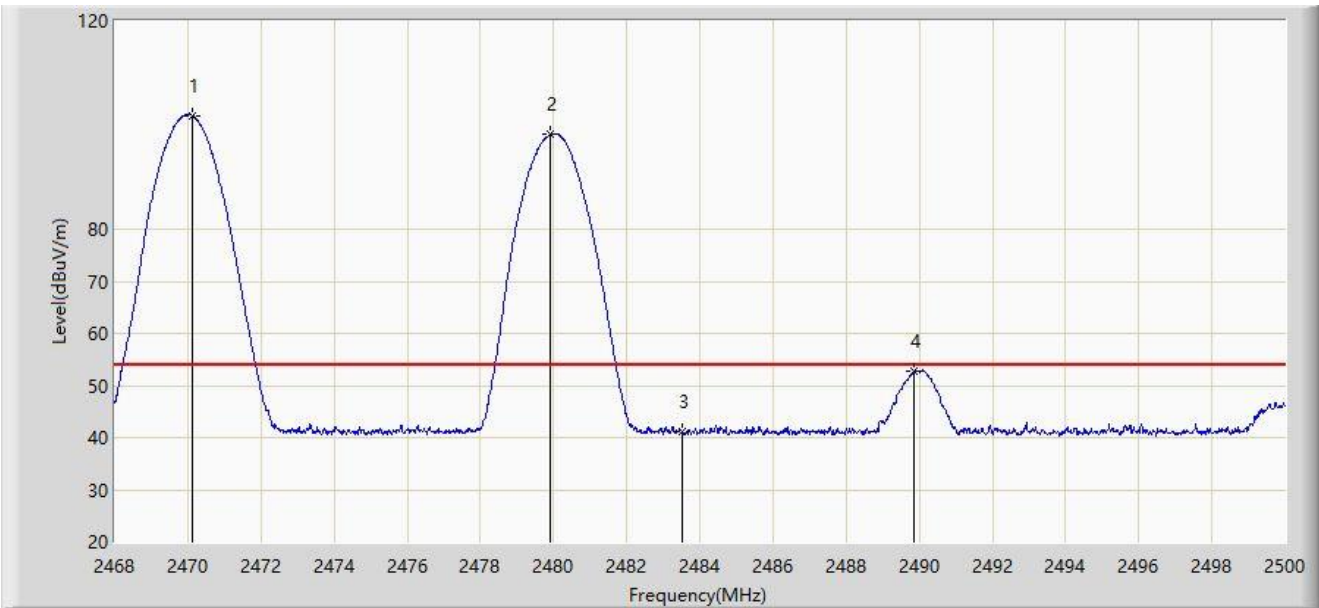


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2470.128	101.835	69.456	N/A	N/A	32.379	AV
2	*	2479.904	98.136	65.752	44.136	54.000	32.384	AV
3		2483.500	41.190	8.808	-12.810	54.000	32.382	AV
4		2489.856	52.780	20.401	-1.220	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 6# - 2480MHz	

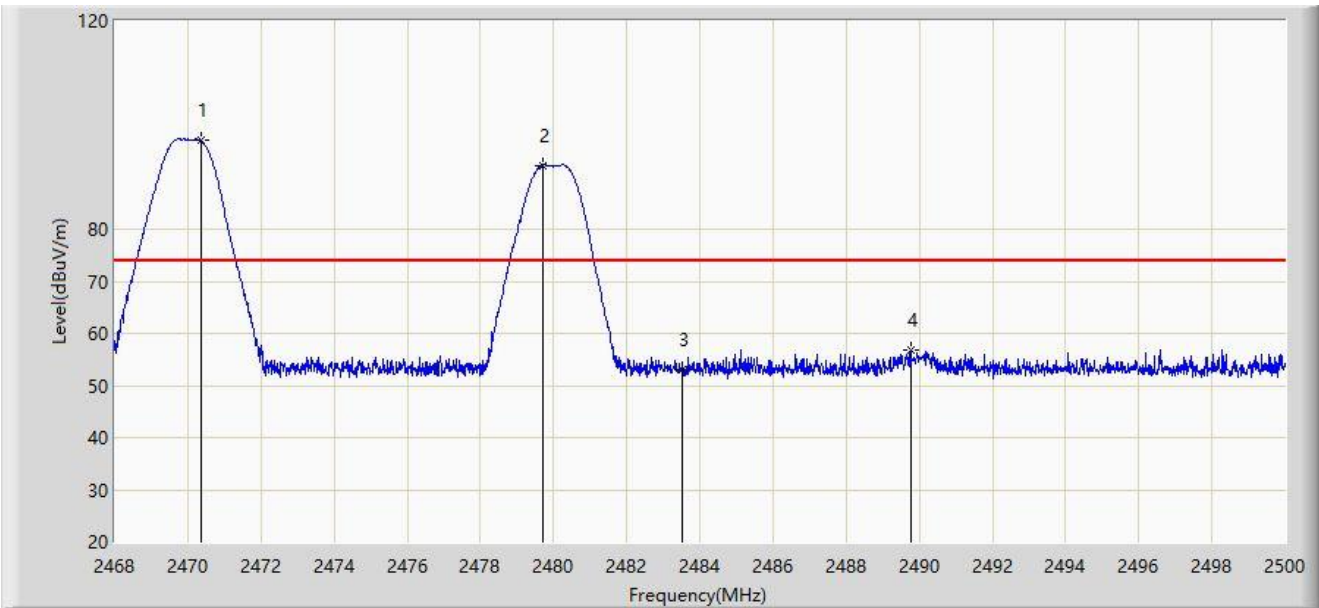


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.368	96.969	64.589	N/A	N/A	32.380	PK
2	*	2479.696	92.238	59.854	18.238	74.000	32.384	PK
3		2483.500	53.154	20.772	-20.846	74.000	32.382	PK
4		2489.760	56.922	24.543	-17.078	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2470MHz Ant 8 - Filter 6# - 2480MHz	

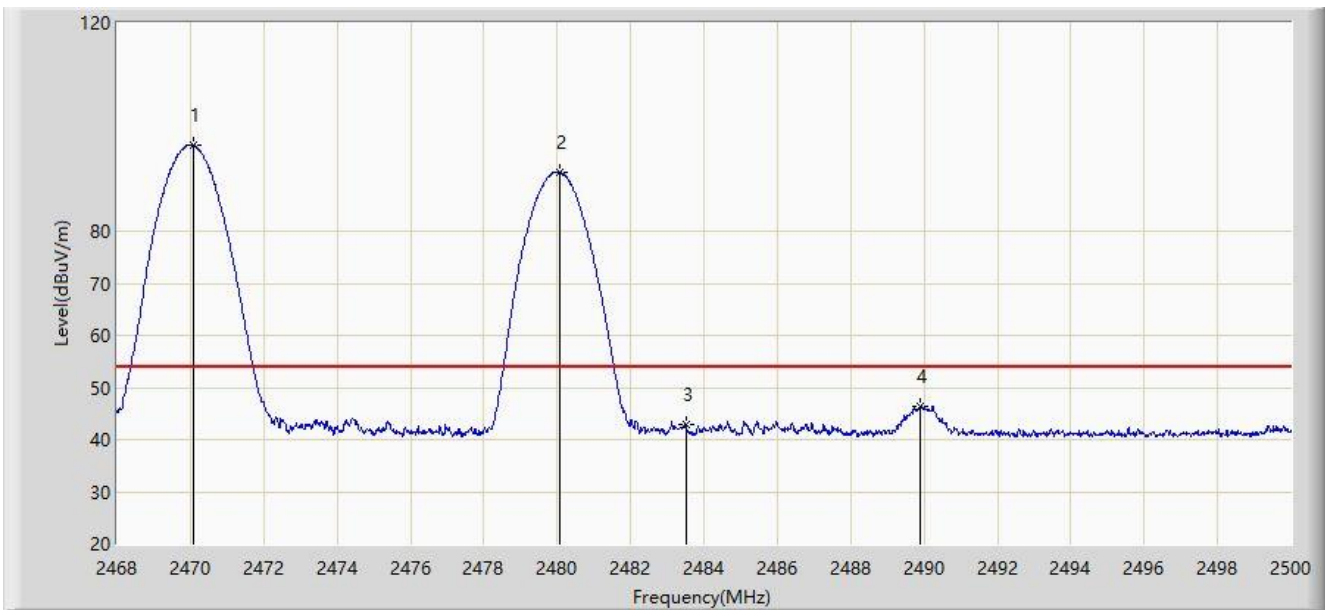


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.080	96.570	64.191	N/A	N/A	32.379	AV
2	*	2480.080	91.342	58.958	37.342	54.000	32.384	AV
3		2483.500	42.779	10.397	-11.221	54.000	32.382	AV
4		2489.888	46.425	14.046	-7.575	54.000	32.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 6# - 2480MHz	

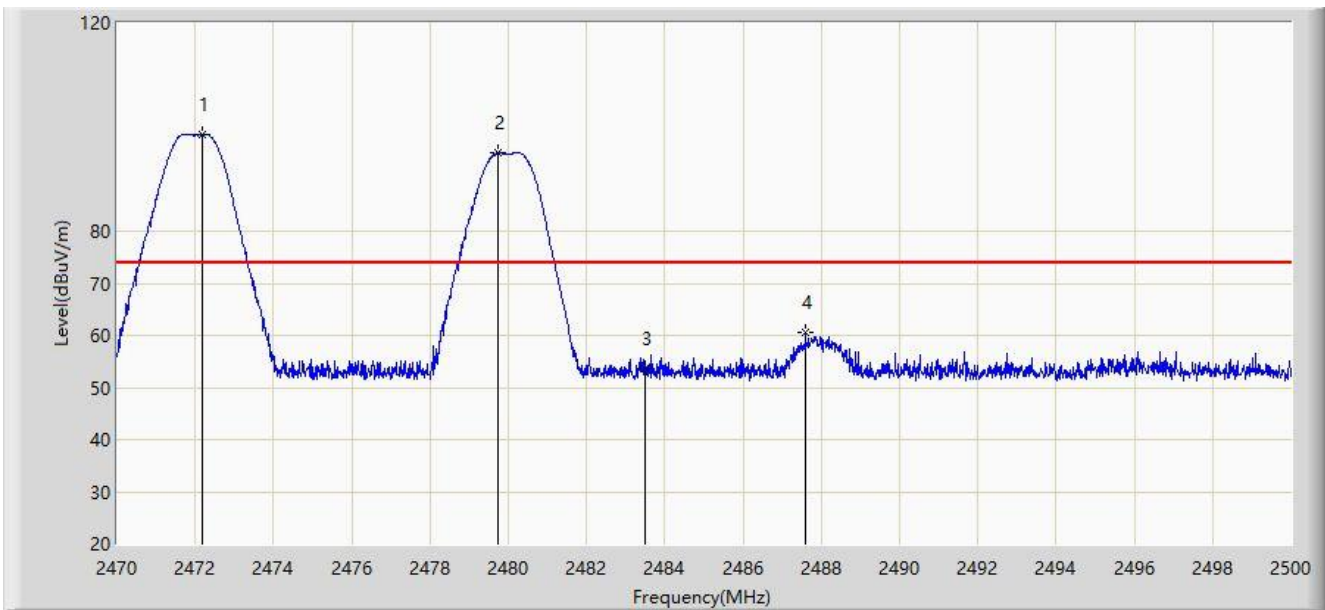


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2472.175	98.496	66.113	N/A	N/A	32.384	PK
2	*	2479.720	95.045	62.661	21.045	74.000	32.384	PK
3		2483.500	53.480	21.098	-20.520	74.000	32.382	PK
4		2487.595	60.559	28.179	-13.441	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 6# - 2480MHz	

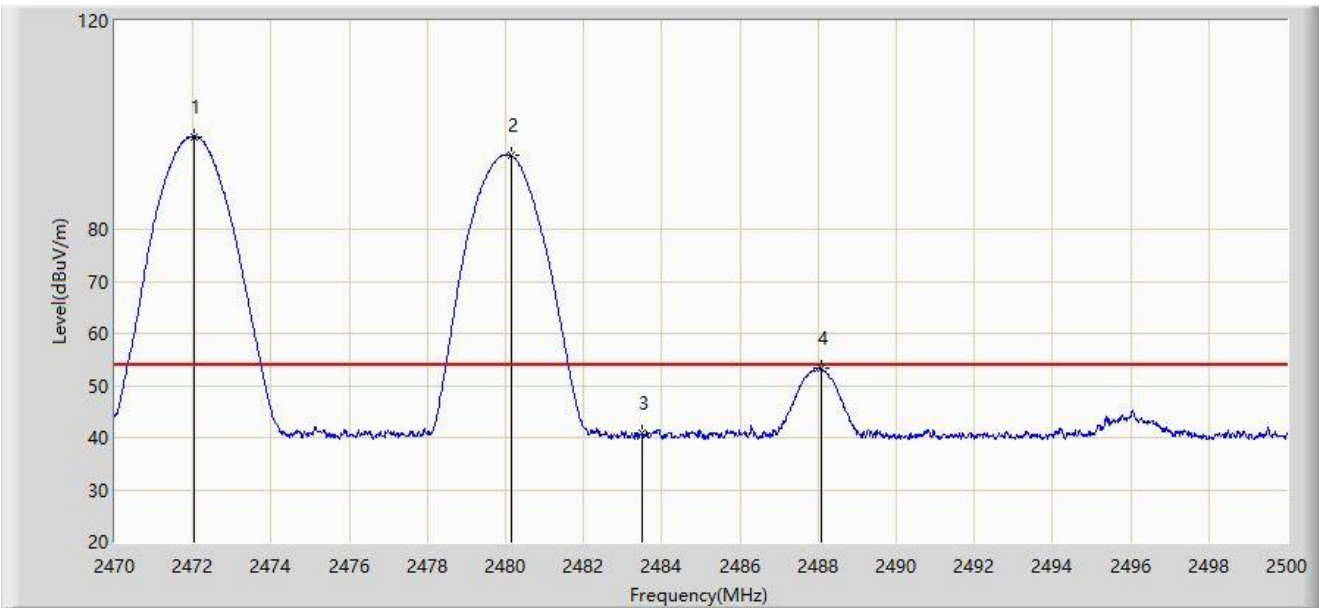


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2472.040	97.801	65.418	N/A	N/A	32.383	AV
2	*	2480.155	94.089	61.705	40.089	54.000	32.384	AV
3		2483.500	40.894	8.512	-13.106	54.000	32.382	AV
4		2488.075	53.405	21.025	-0.595	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 6# - 2480MHz	

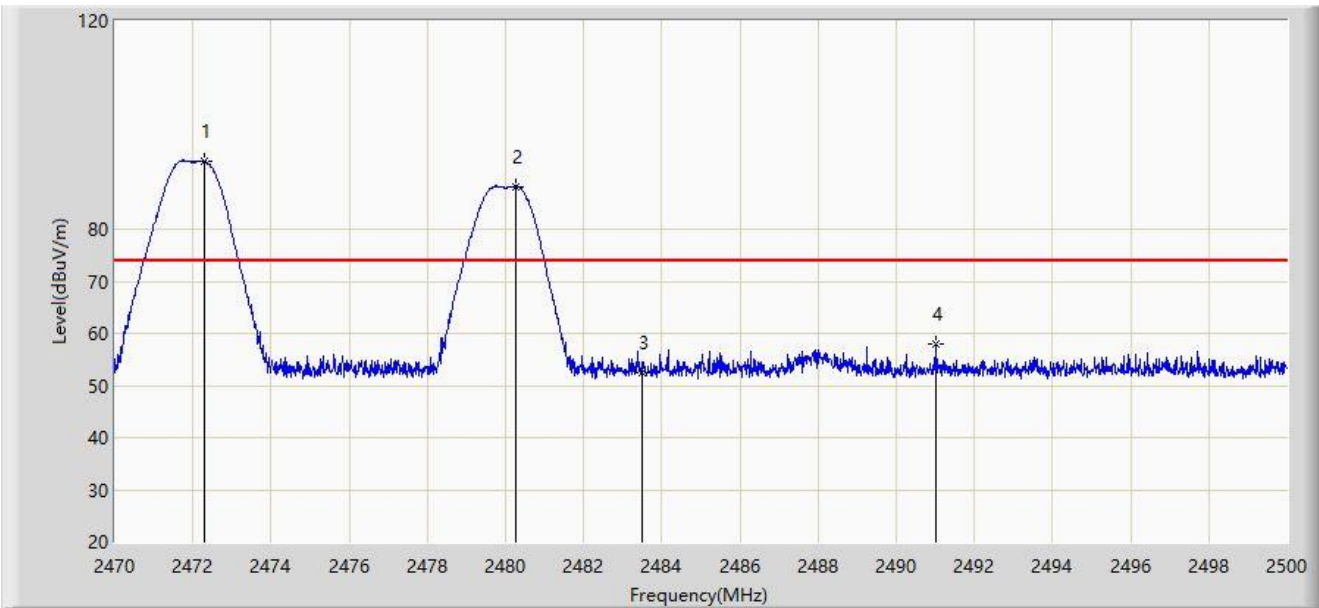


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2472.310	93.016	60.632	N/A	N/A	32.384	PK
2	*	2480.245	88.216	55.832	14.216	74.000	32.384	PK
3		2483.500	52.424	20.042	-21.576	74.000	32.382	PK
4		2491.030	58.073	25.694	-15.927	74.000	32.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2472MHz Ant 8 - Filter 6# - 2480MHz	

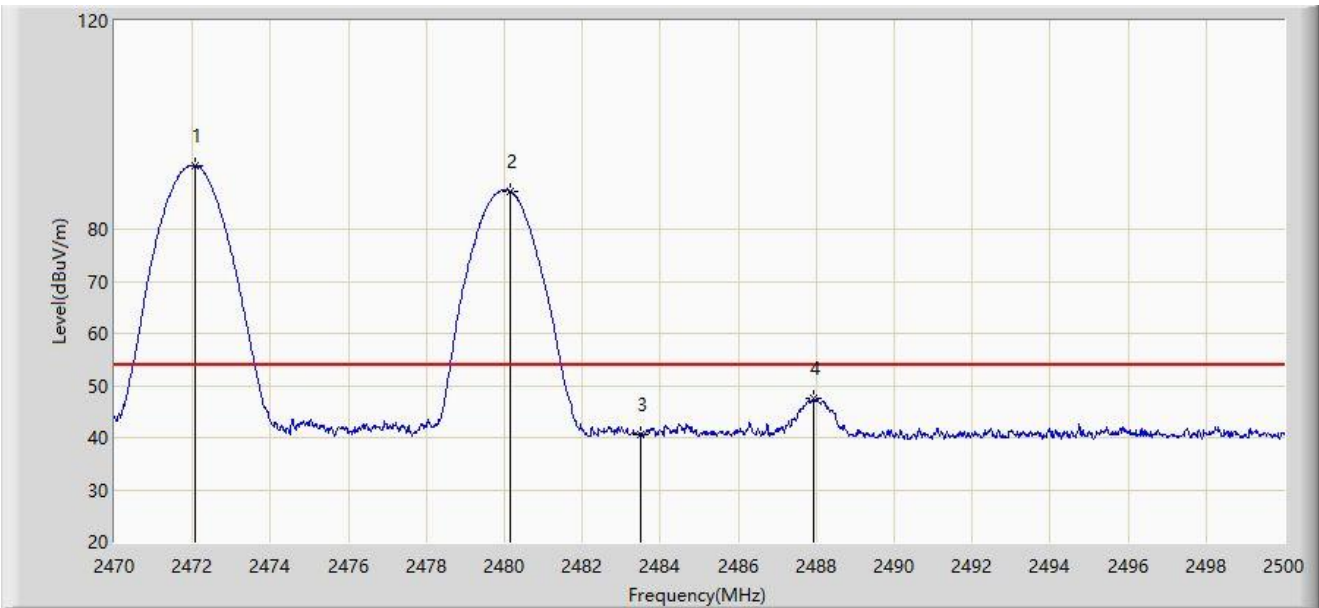


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2472.085	92.240	59.857	N/A	N/A	32.383	AV
2	*	2480.155	87.280	54.896	33.280	54.000	32.384	AV
3		2483.500	40.607	8.225	-13.393	54.000	32.382	AV
4		2487.925	47.518	15.138	-6.482	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 6# - 2480MHz	

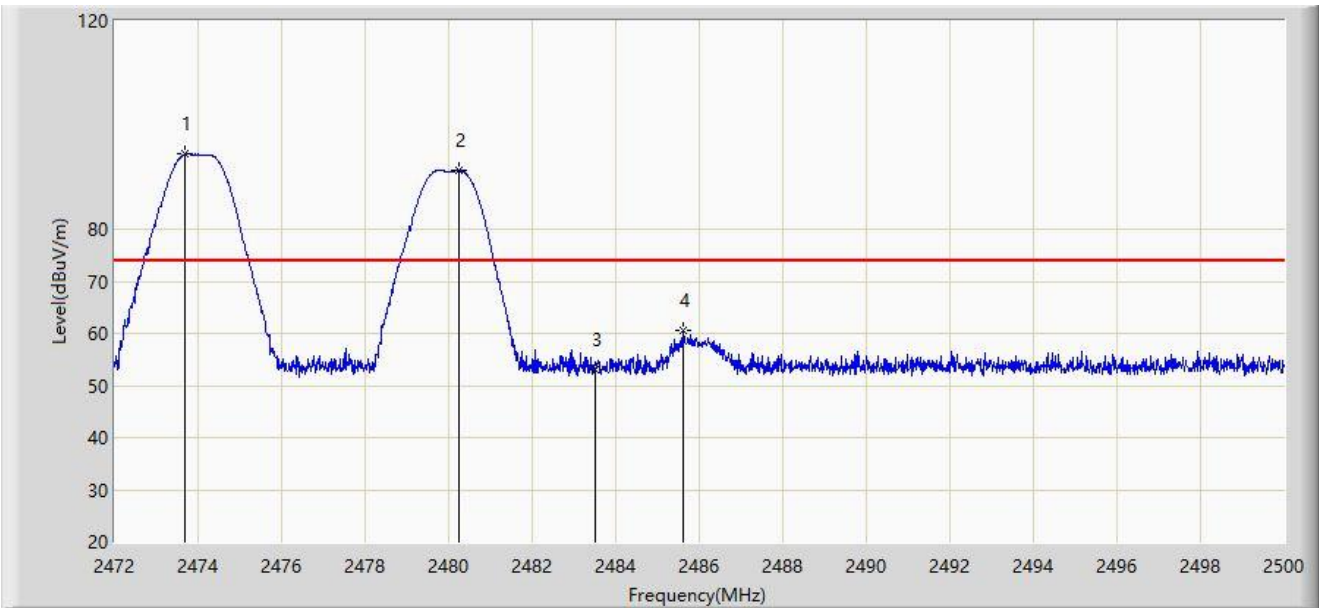


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2473.694	94.395	62.009	N/A	N/A	32.386	PK
2	*	2480.260	91.357	58.973	17.357	74.000	32.384	PK
3		2483.500	53.002	20.620	-20.998	74.000	32.382	PK
4		2485.608	60.491	28.110	-13.509	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 6# - 2480MHz	

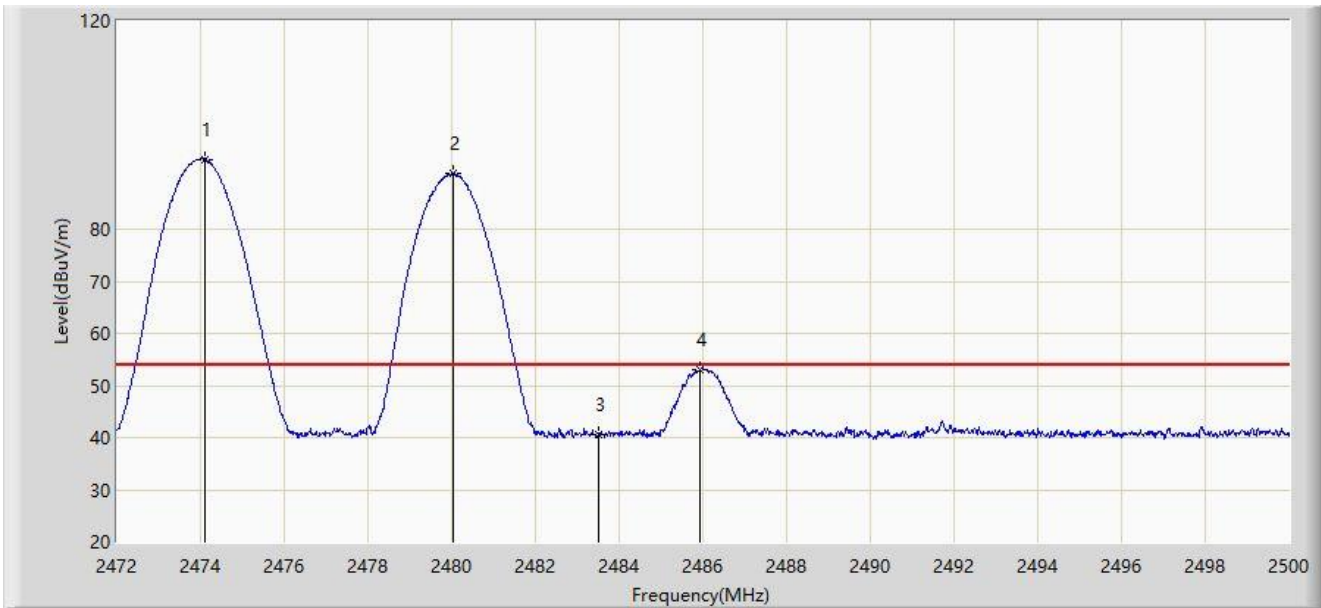


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.114	93.456	61.069	N/A	N/A	32.387	AV
2	*	2480.022	90.653	58.269	36.653	54.000	32.384	AV
3		2483.500	40.683	8.301	-13.317	54.000	32.382	AV
4		2485.944	53.120	20.739	-0.880	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 6# - 2480MHz	

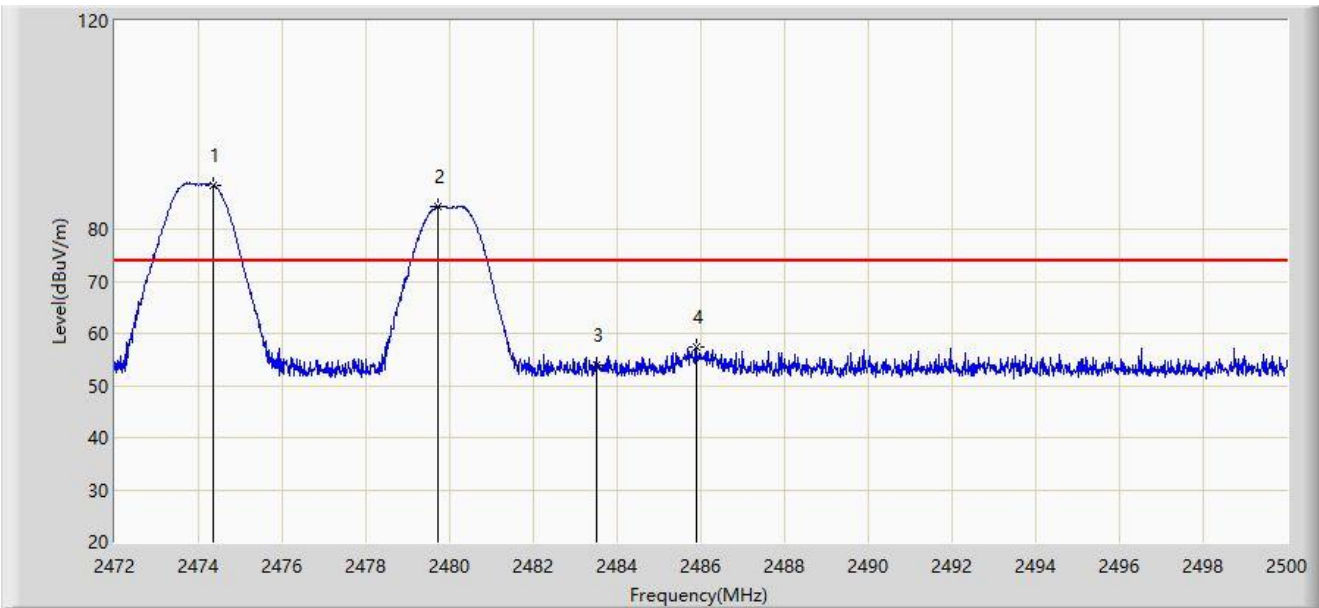


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.338	88.540	56.153	N/A	N/A	32.387	PK
2	*	2479.714	84.487	52.103	10.487	74.000	32.384	PK
3		2483.500	53.828	21.446	-20.172	74.000	32.382	PK
4		2485.888	57.463	25.082	-16.537	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2474MHz Ant 8 - Filter 6# - 2480MHz	

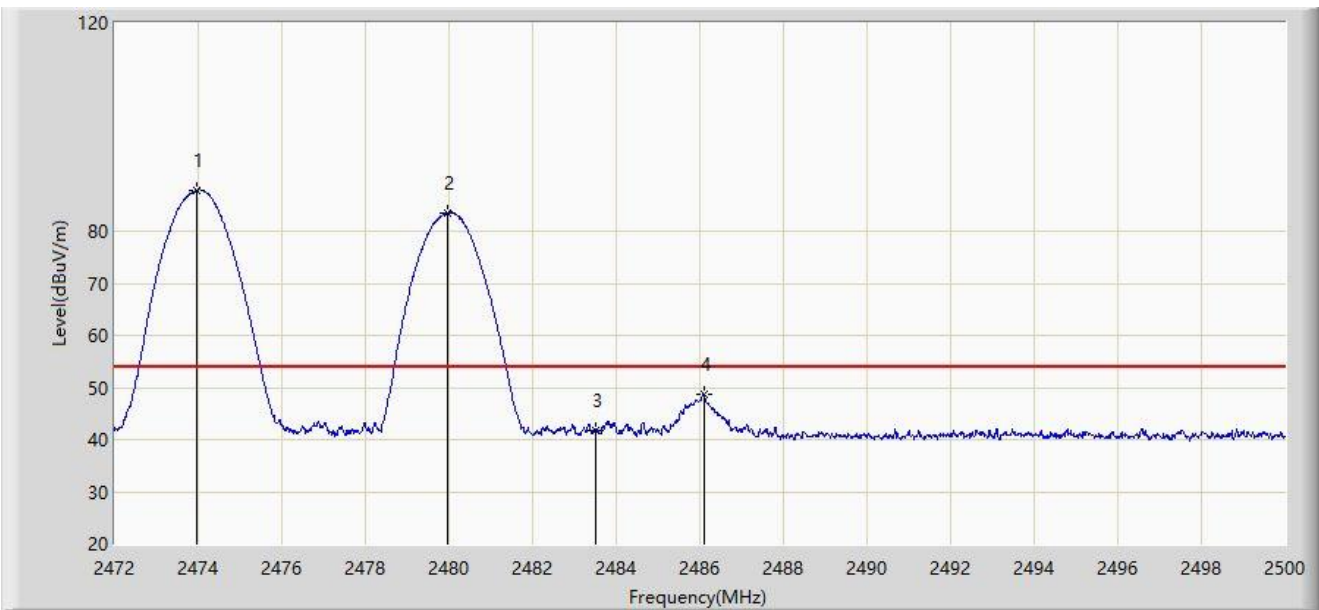


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2473.974	87.860	55.473	N/A	N/A	32.387	AV
2	*	2479.966	83.518	51.134	29.518	54.000	32.384	AV
3		2483.500	41.682	9.300	-12.318	54.000	32.382	AV
4		2486.098	48.694	16.313	-5.306	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-05
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 6# - 2480MHz	

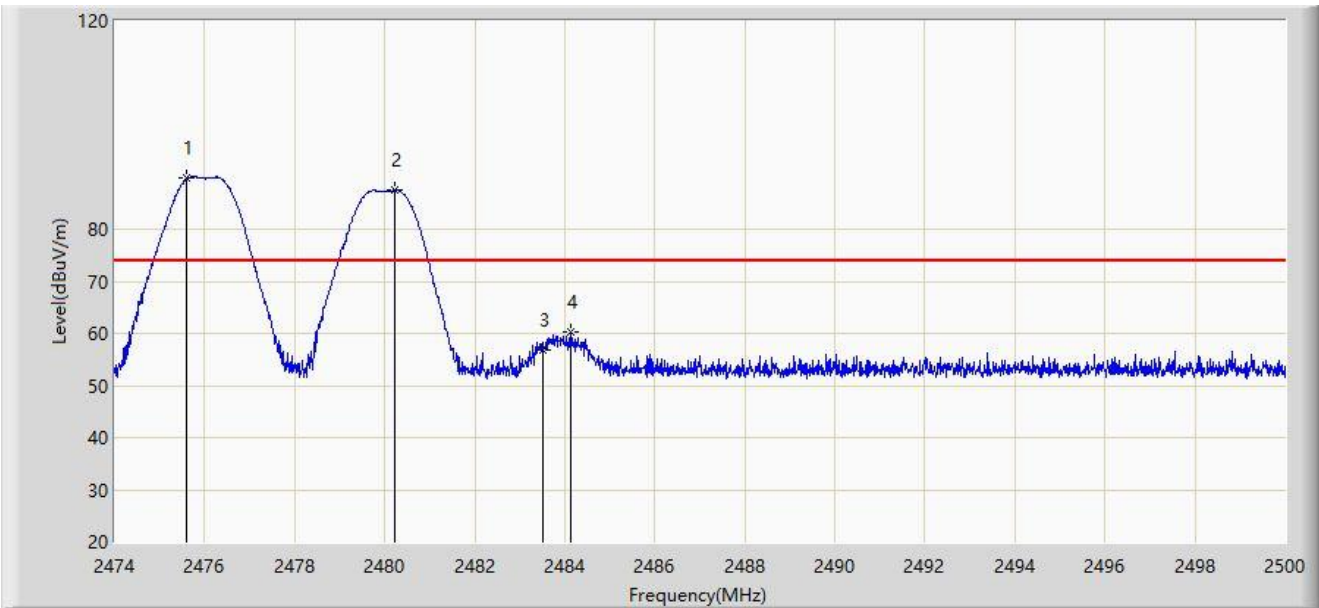


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2475.612	89.745	57.359	N/A	N/A	32.386	PK
2	*	2480.214	87.411	55.027	13.411	74.000	32.384	PK
3		2483.500	56.916	24.534	-17.084	74.000	32.382	PK
4		2484.127	60.302	27.920	-13.698	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-06-05
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit at Ant 6 - Filter 1# - 2476MHz Ant 8 - Filter 6# - 2480MHz	

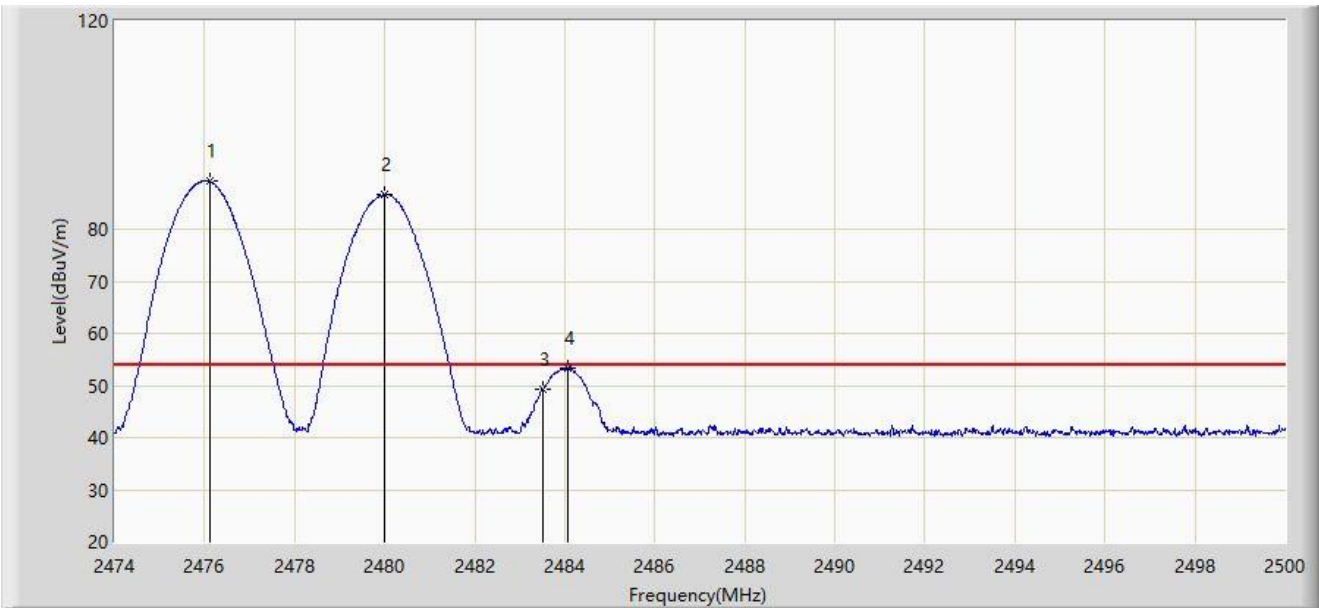

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2476.132	89.138	56.752	N/A	N/A	32.386	AV
2	*	2479.993	86.623	54.239	32.623	54.000	32.384	AV
3		2483.500	49.169	16.787	-4.831	54.000	32.382	AV
4		2484.062	53.416	21.034	-0.584	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).