


| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 17:35 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at 2412MHz | |

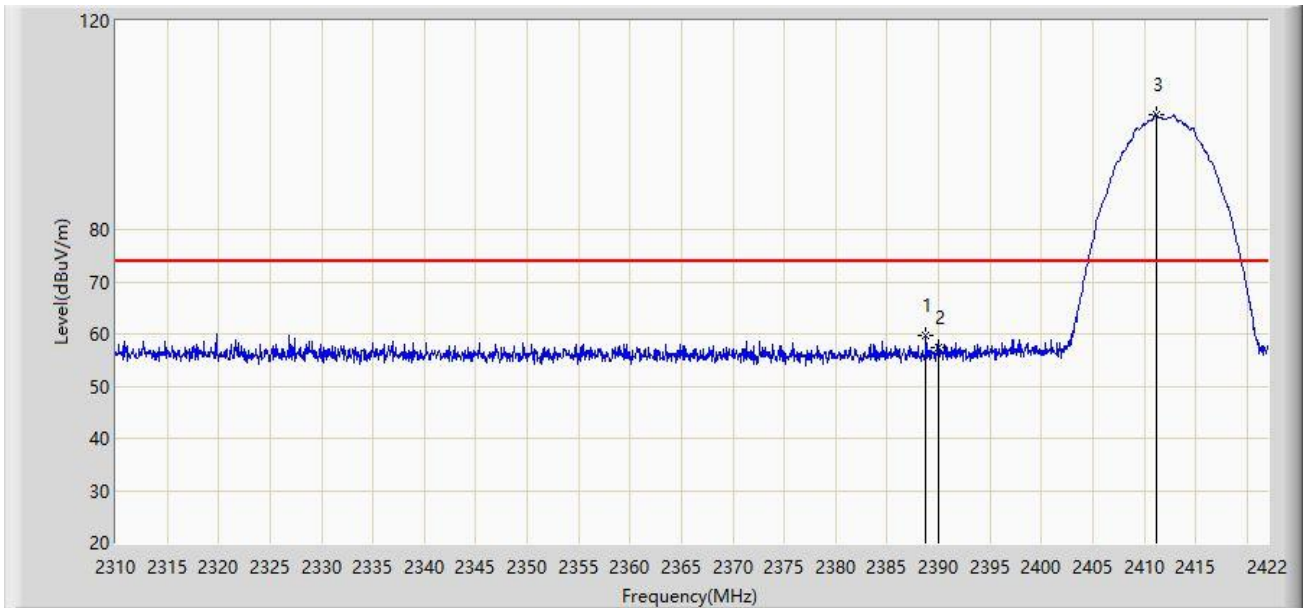


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2388.792 | 59.653 | 28.660 | -14.347 | 74.000 | 30.993 | PK |
| 2 | | 2390.000 | 57.275 | 26.283 | -16.725 | 74.000 | 30.992 | PK |
| 3 | | 2411.136 | 101.912 | 70.955 | N/A | N/A | 30.957 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 17:37 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at 2412MHz | |

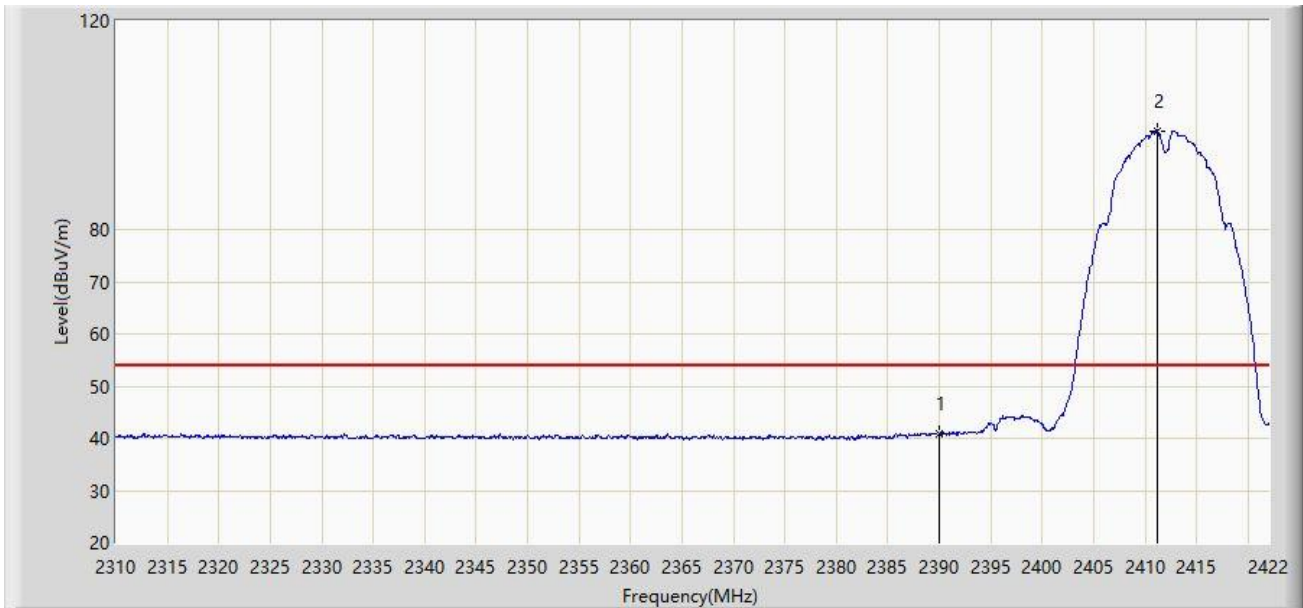

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2390.000 | 40.921 | 9.929 | -13.079 | 54.000 | 30.992 | AV |
| 2 | | 2411.136 | 98.967 | 68.010 | N/A | N/A | 30.957 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:11 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2412MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 2390.000 | 73.036 | 42.044 | -0.964 | 74.000 | 30.992 | PK |
| 2 | | 2412.704 | 112.100 | 81.148 | N/A | N/A | 30.953 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:13 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2412MHz | |

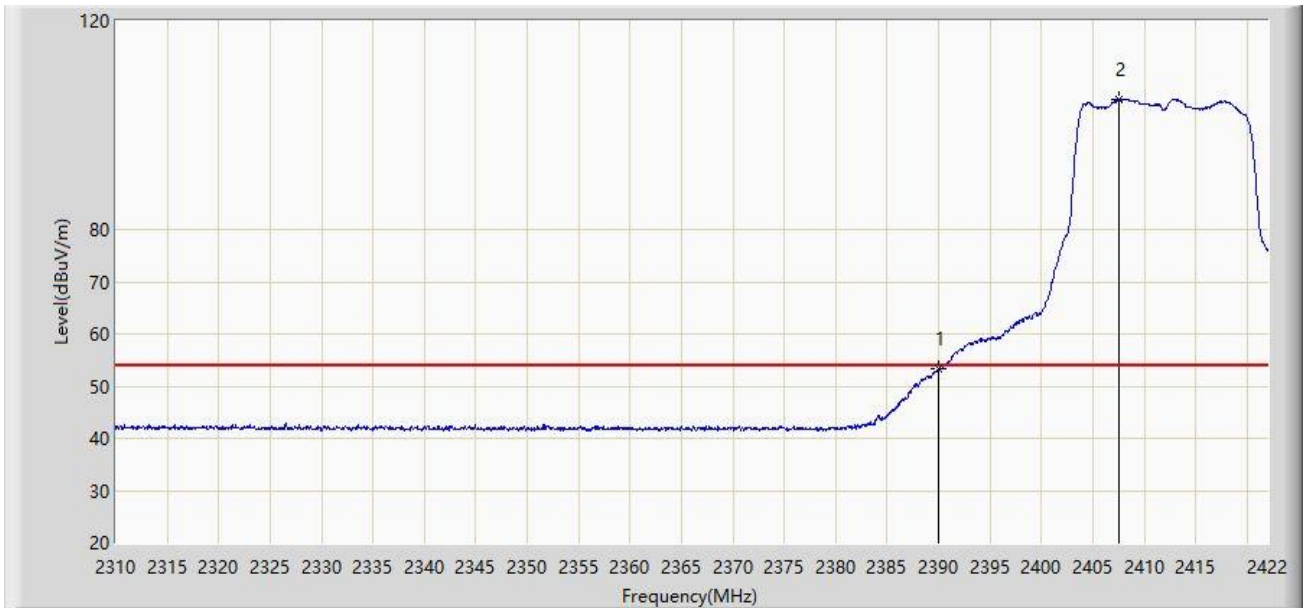


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2390.000 | 53.231 | 22.239 | -0.769 | 54.000 | 30.992 | AV |
| 2 | | 2407.552 | 104.938 | 73.969 | N/A | N/A | 30.970 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:15 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2412MHz | |

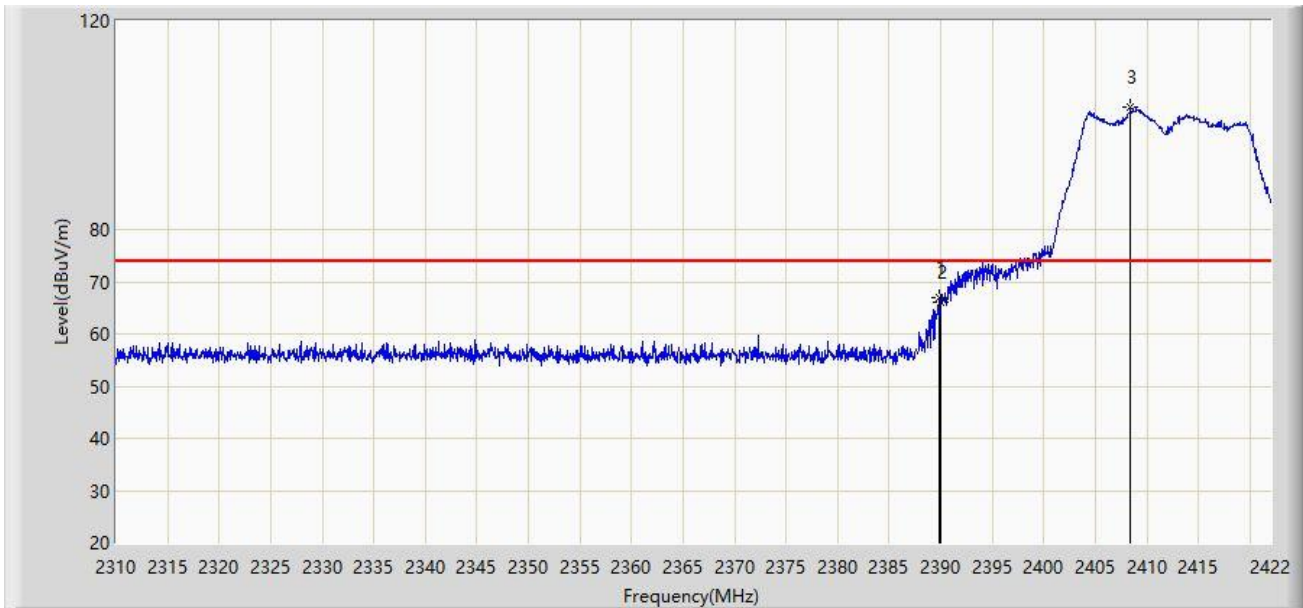


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.800 | 67.077 | 36.085 | -6.923 | 74.000 | 30.993 | PK |
| 2 | | 2390.000 | 66.031 | 35.039 | -7.969 | 74.000 | 30.992 | PK |
| 3 | | 2408.448 | 103.393 | 72.427 | N/A | N/A | 30.966 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:17 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2412MHz | |

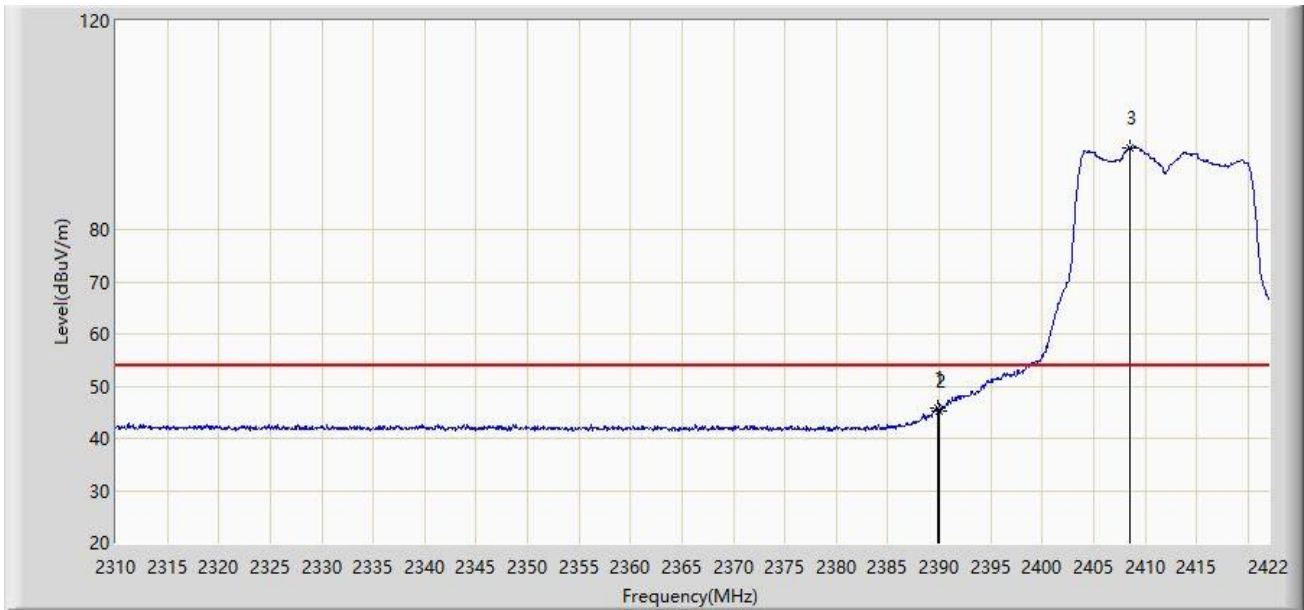


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 2389.856 | 45.699 | 14.707 | -8.301 | 54.000 | 30.992 | AV |
| 2 | | 2390.000 | 45.297 | 14.305 | -8.703 | 54.000 | 30.992 | AV |
| 3 | | 2408.504 | 95.689 | 64.723 | N/A | N/A | 30.966 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:41 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz | |

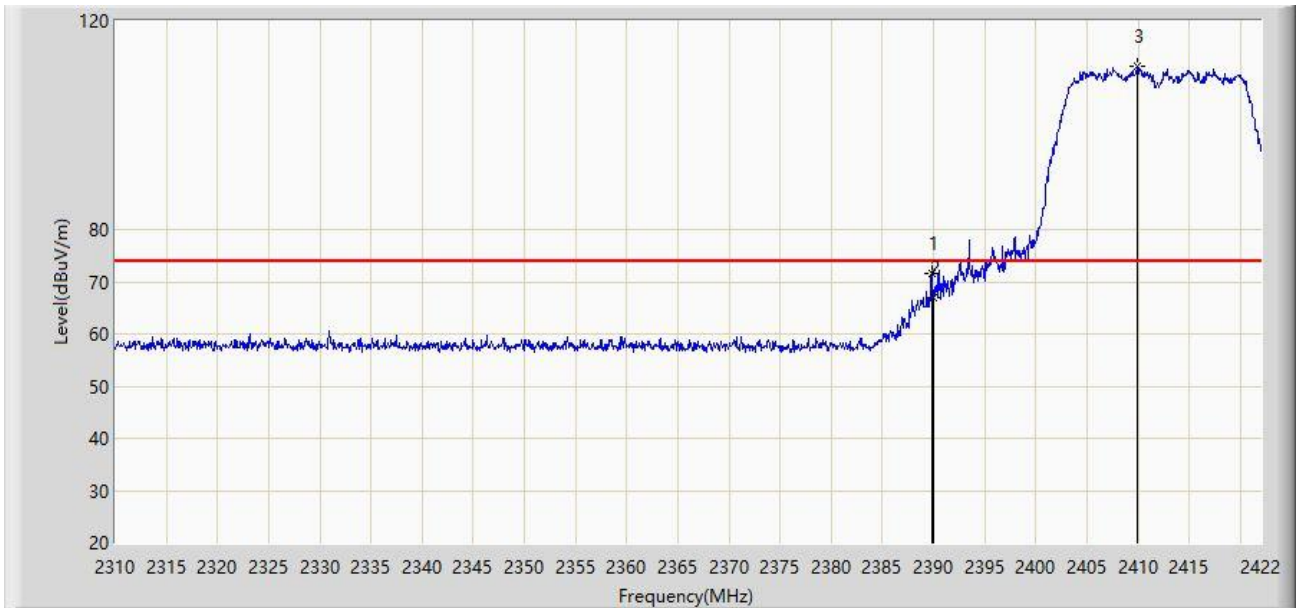


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 2389.800 | 71.582 | 40.590 | -2.418 | 74.000 | 30.993 | PK |
| 2 | | 2390.000 | 66.819 | 35.827 | -7.181 | 74.000 | 30.992 | PK |
| 3 | | 2409.960 | 111.234 | 80.273 | N/A | N/A | 30.961 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:39 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz | |

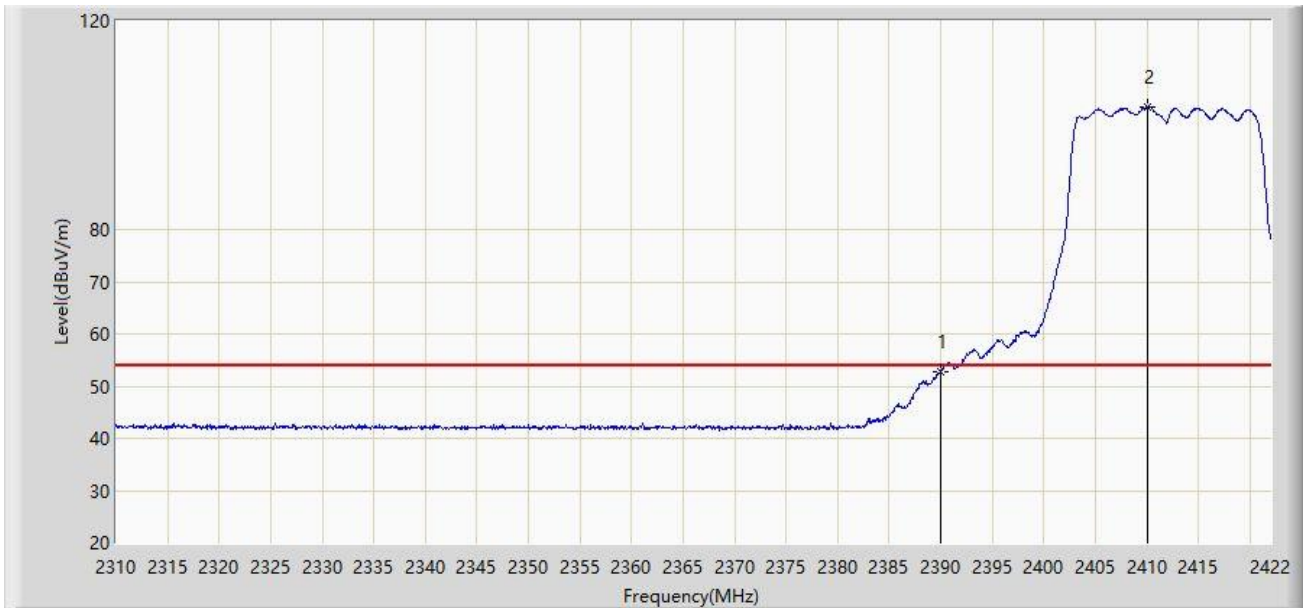


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2390.000 | 52.798 | 21.806 | -1.202 | 54.000 | 30.992 | AV |
| 2 | | 2410.016 | 103.426 | 72.466 | N/A | N/A | 30.961 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:44 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz | |

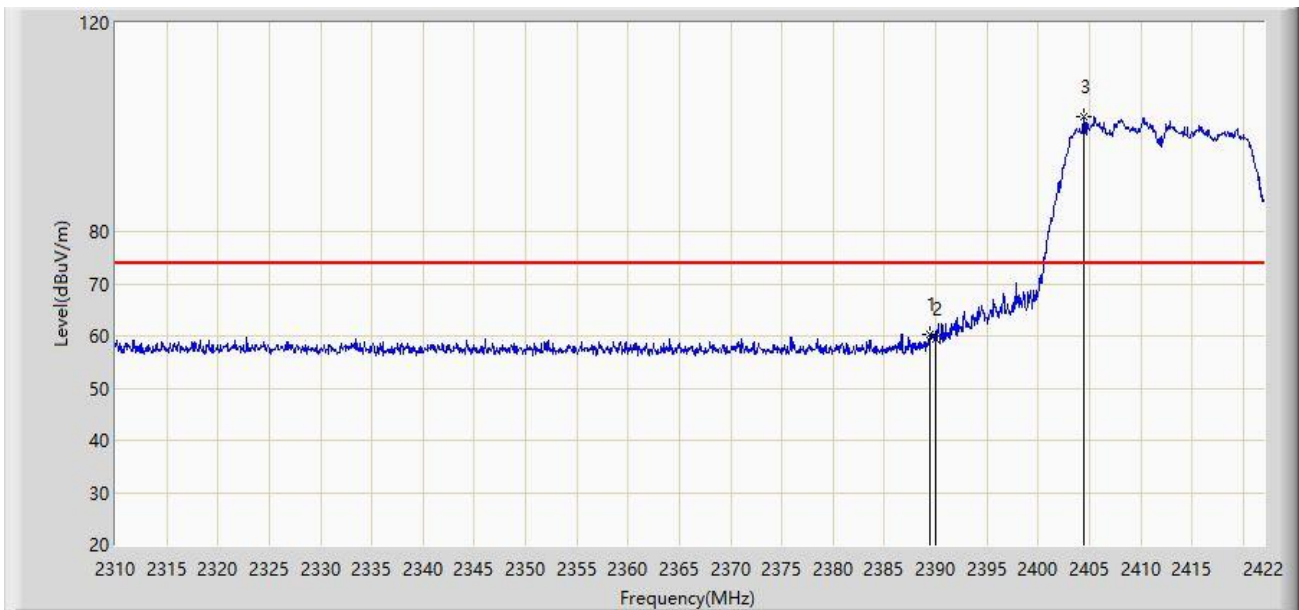


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 2389.464 | 60.321 | 29.329 | -13.679 | 74.000 | 30.993 | PK |
| 2 | | 2390.000 | 59.400 | 28.408 | -14.600 | 74.000 | 30.992 | PK |
| 3 | | 2404.472 | 101.952 | 70.972 | N/A | N/A | 30.980 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:45 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz | |

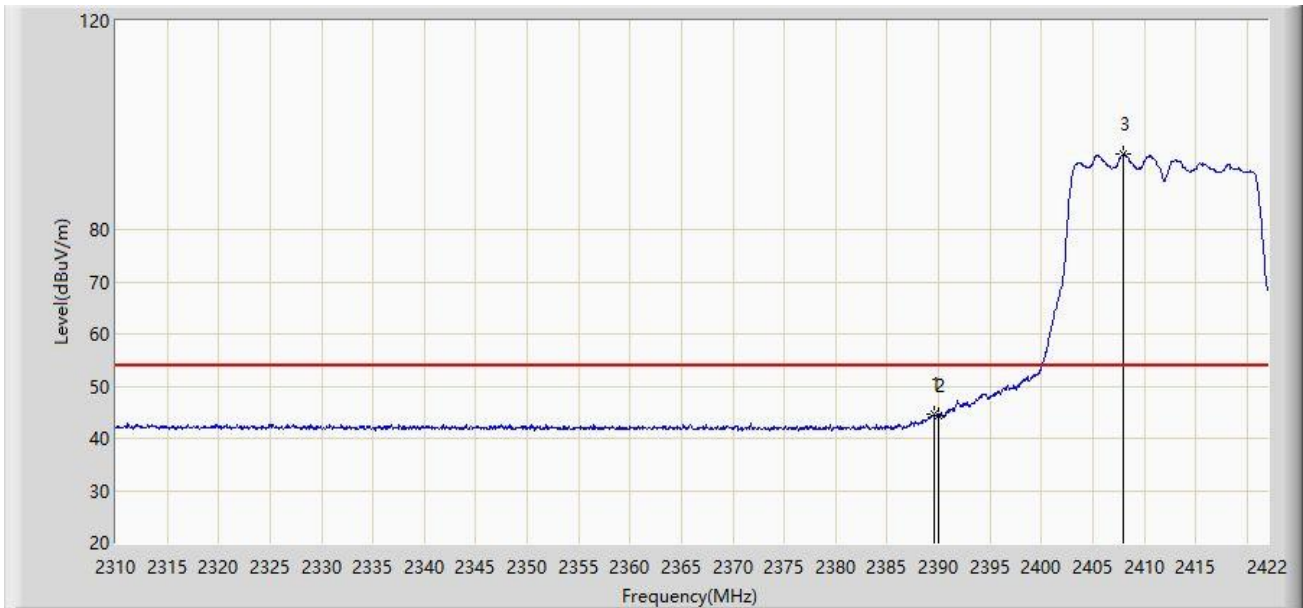


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.520 | 44.529 | 13.537 | -9.471 | 54.000 | 30.992 | AV |
| 2 | | 2390.000 | 44.455 | 13.463 | -9.545 | 54.000 | 30.992 | AV |
| 3 | | 2407.944 | 94.501 | 63.533 | N/A | N/A | 30.967 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:22 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz | |

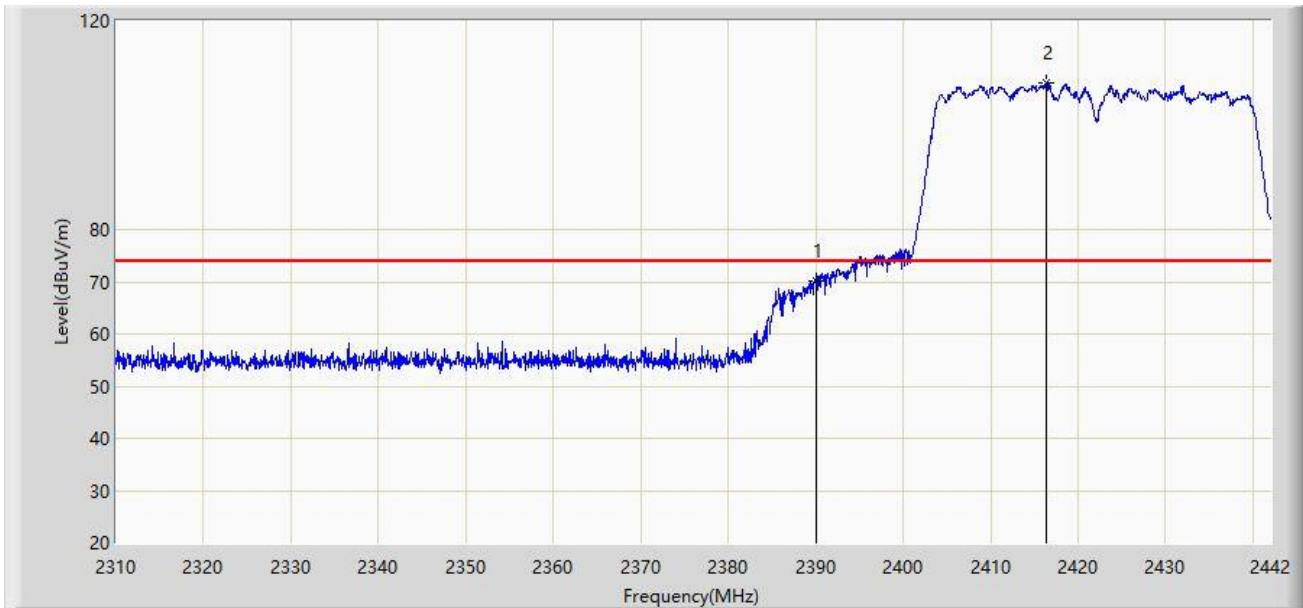


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2390.000 | 70.270 | 39.278 | -3.730 | 74.000 | 30.992 | PK |
| 2 | | 2416.392 | 108.179 | 77.236 | N/A | N/A | 30.943 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:20 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz | |

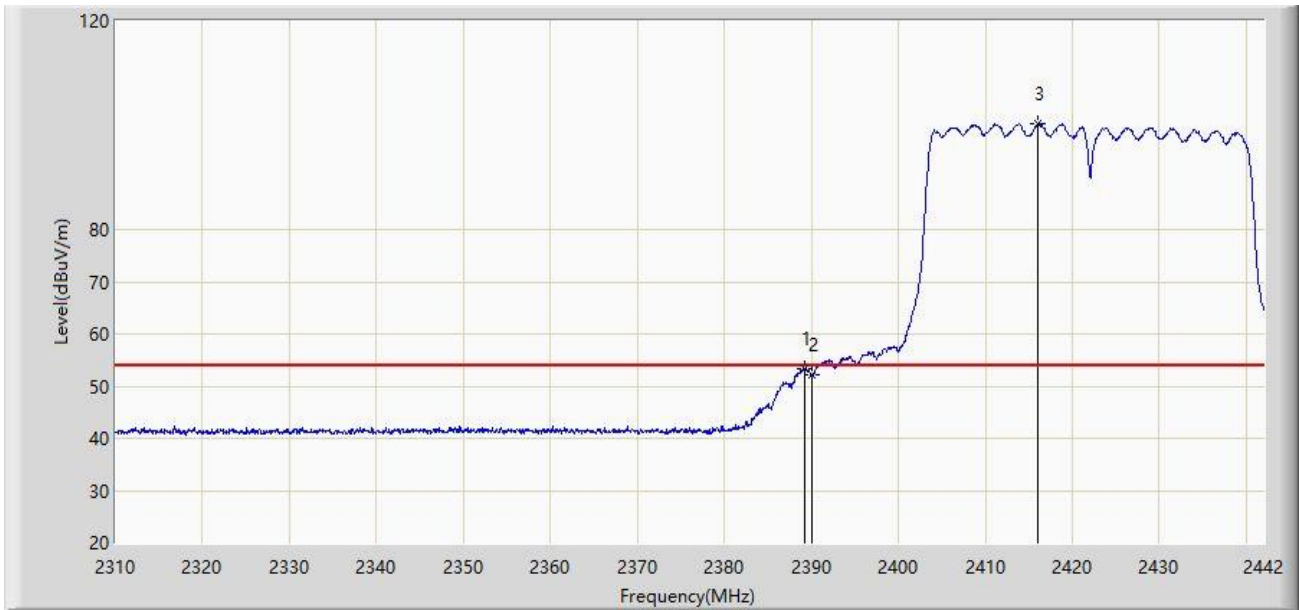


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.266 | 53.390 | 22.397 | -0.610 | 54.000 | 30.992 | AV |
| 2 | | 2390.000 | 52.168 | 21.176 | -1.832 | 54.000 | 30.992 | AV |
| 3 | | 2416.062 | 100.281 | 69.338 | N/A | N/A | 30.943 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:23 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz | |

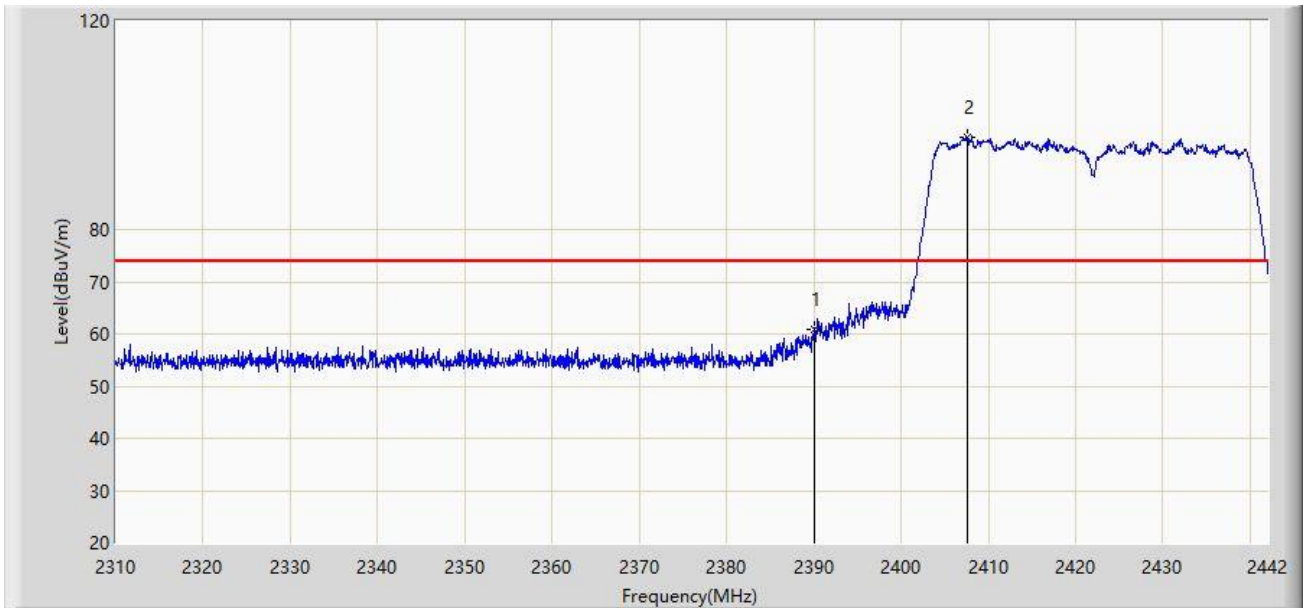


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2390.000 | 60.766 | 29.774 | -13.234 | 74.000 | 30.992 | PK |
| 2 | | 2407.548 | 97.799 | 66.830 | N/A | N/A | 30.970 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:26 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz | |

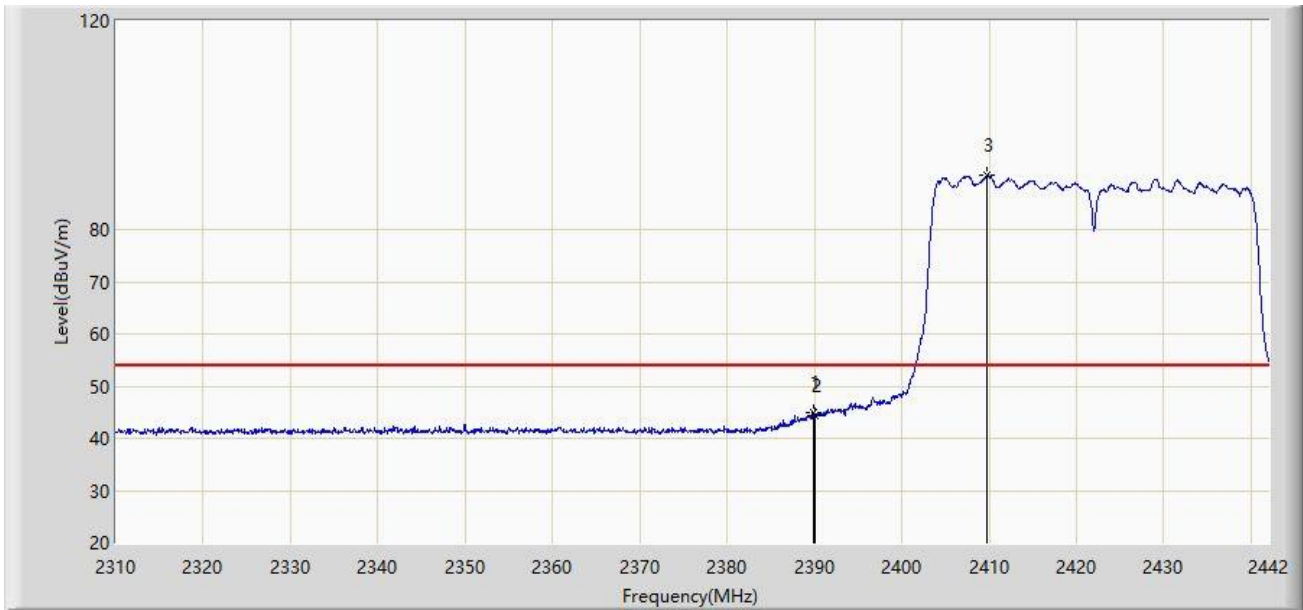

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.860 | 44.908 | 13.916 | -9.092 | 54.000 | 30.992 | AV |
| 2 | | 2390.000 | 44.403 | 13.411 | -9.597 | 54.000 | 30.992 | AV |
| 3 | | 2409.726 | 90.406 | 59.445 | N/A | N/A | 30.962 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:58 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.464 | 71.513 | 40.521 | -2.487 | 74.000 | 30.993 | PK |
| 2 | | 2390.000 | 70.870 | 39.878 | -3.130 | 74.000 | 30.992 | PK |
| 3 | | 2408.840 | 114.234 | 83.269 | N/A | N/A | 30.965 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 22:56 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz | |

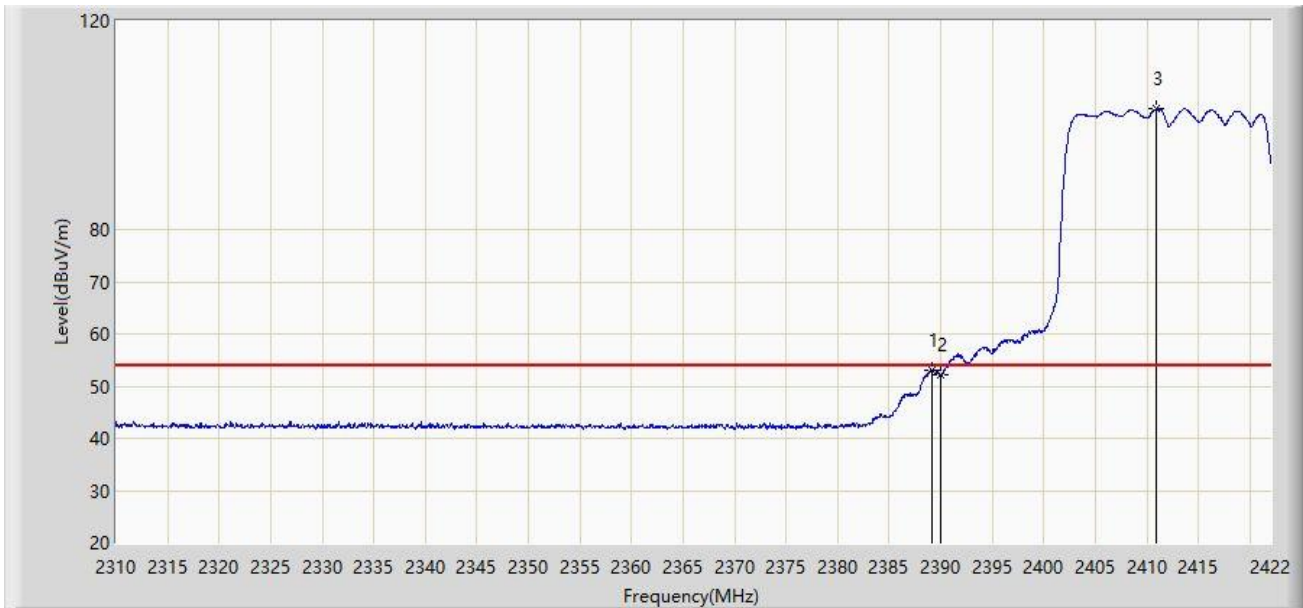


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.128 | 53.103 | 22.110 | -0.897 | 54.000 | 30.993 | AV |
| 2 | | 2390.000 | 52.095 | 21.103 | -1.905 | 54.000 | 30.992 | AV |
| 3 | | 2410.912 | 103.097 | 72.140 | N/A | N/A | 30.957 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:00 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz | |

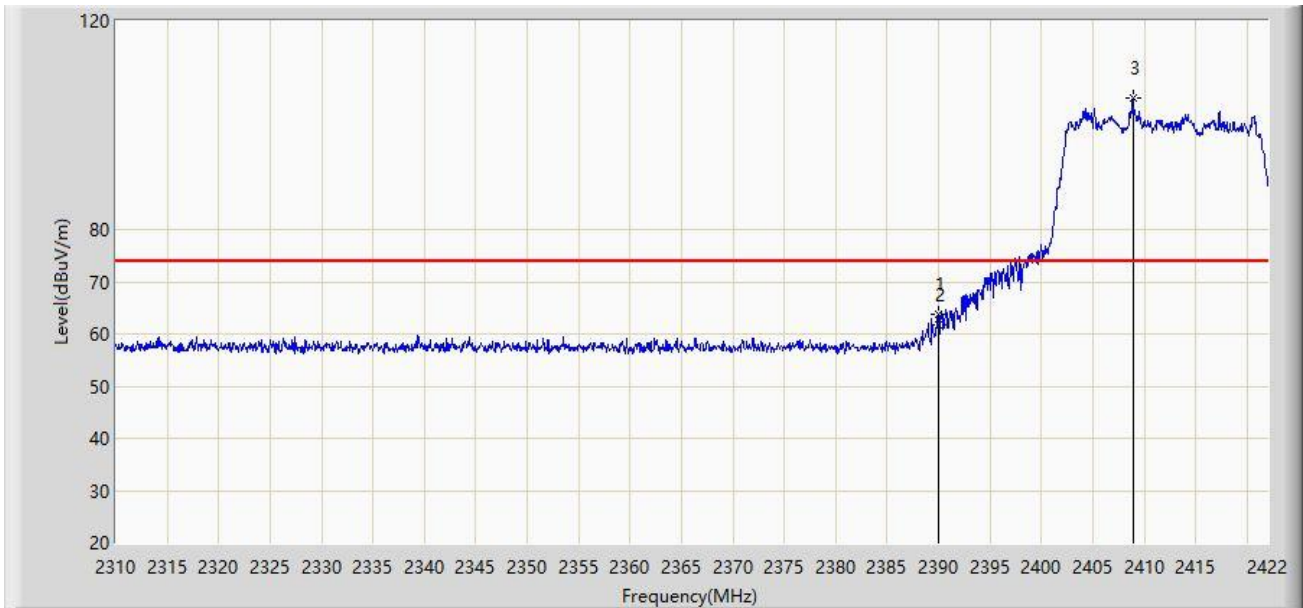


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.968 | 63.688 | 32.696 | -10.312 | 74.000 | 30.992 | PK |
| 2 | | 2390.000 | 61.870 | 30.878 | -12.130 | 74.000 | 30.992 | PK |
| 3 | | 2408.896 | 105.089 | 74.125 | N/A | N/A | 30.965 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:01 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz | |

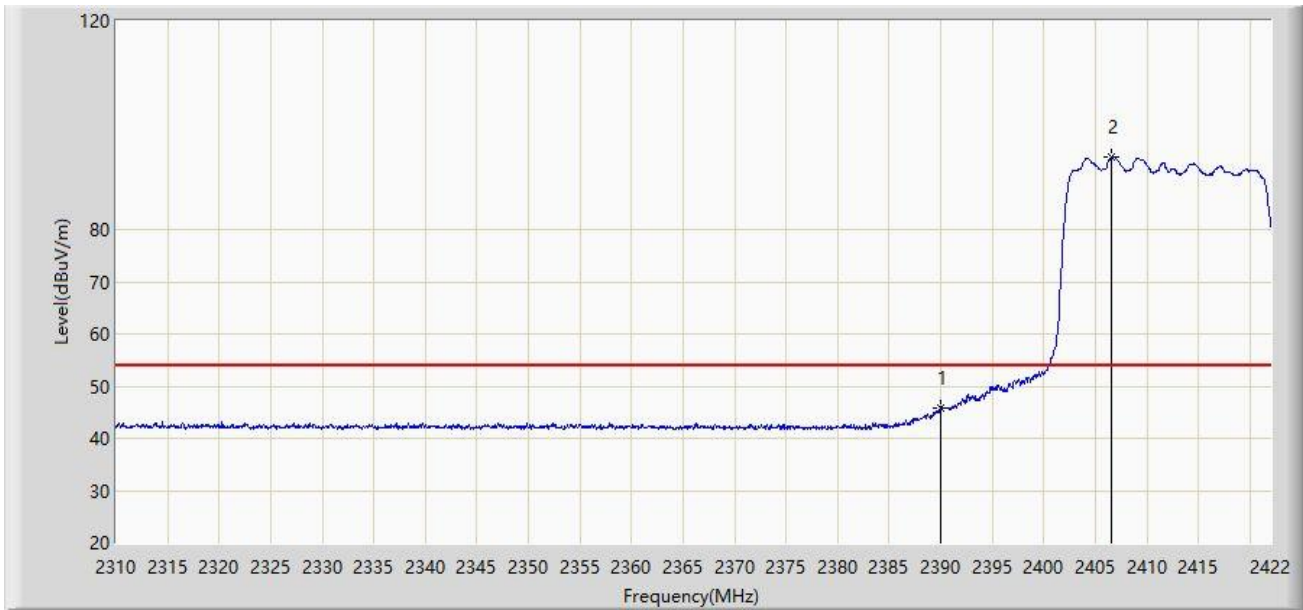


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2390.000 | 45.928 | 14.936 | -8.072 | 54.000 | 30.992 | AV |
| 2 | | 2406.600 | 93.908 | 62.935 | N/A | N/A | 30.972 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:43 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz | |

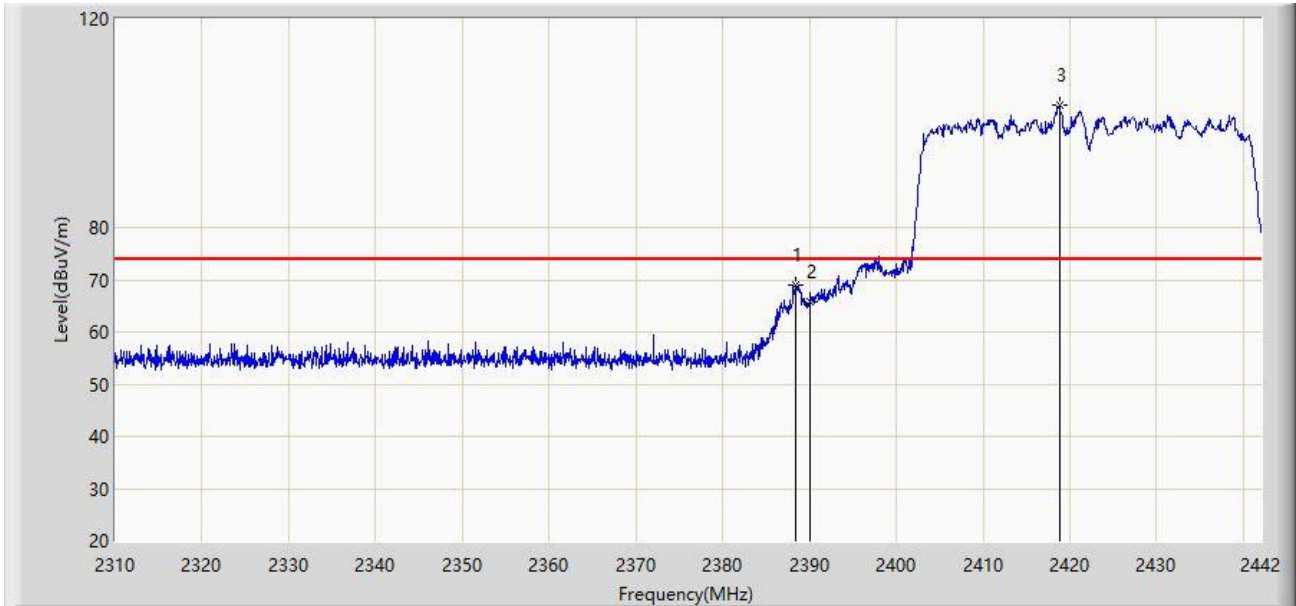


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2388.408 | 68.992 | 37.999 | -5.008 | 74.000 | 30.993 | PK |
| 2 | | 2390.000 | 65.702 | 34.710 | -8.298 | 74.000 | 30.992 | PK |
| 3 | | 2418.768 | 103.390 | 72.454 | N/A | N/A | 30.936 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:40 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz | |

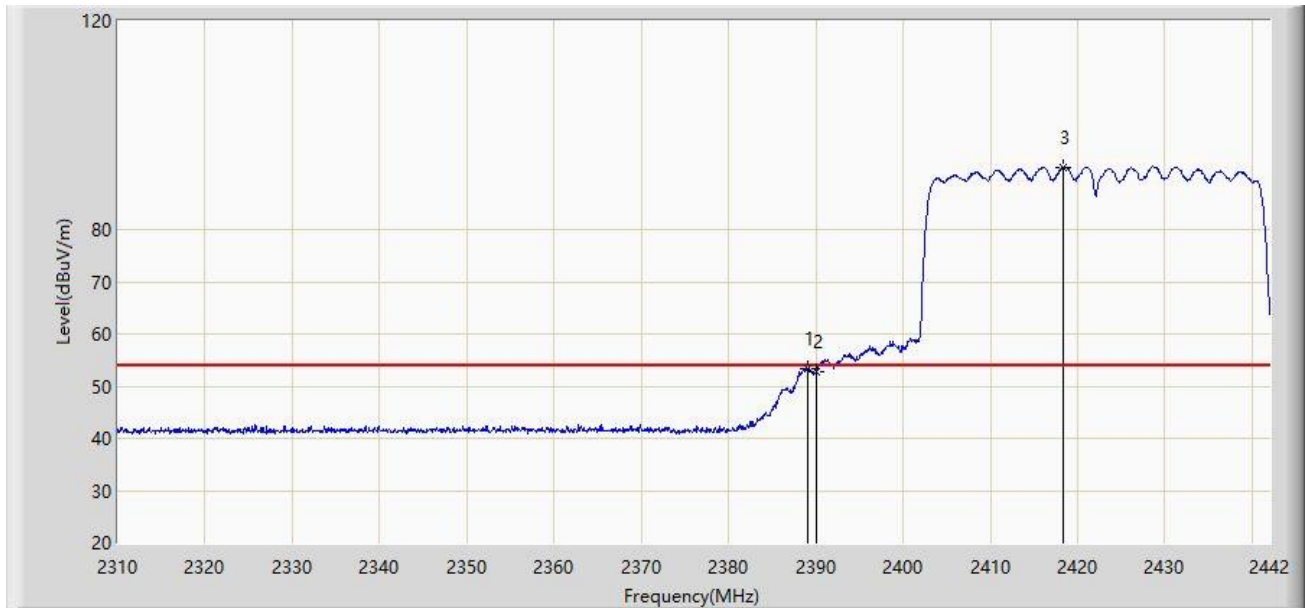


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.068 | 53.463 | 22.470 | -0.537 | 54.000 | 30.993 | AV |
| 2 | | 2390.000 | 52.730 | 21.738 | -1.270 | 54.000 | 30.992 | AV |
| 3 | | 2418.372 | 91.895 | 60.958 | N/A | N/A | 30.937 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:44 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz | |

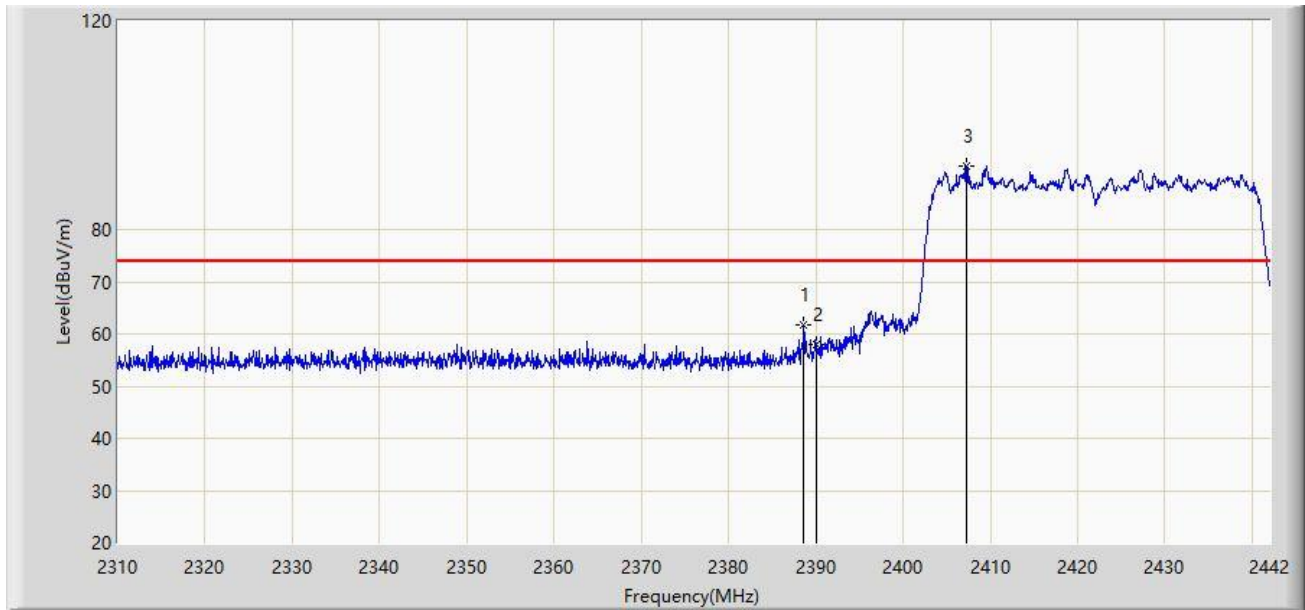


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2388.606 | 61.659 | 30.666 | -12.341 | 74.000 | 30.993 | PK |
| 2 | | 2390.000 | 57.976 | 26.984 | -16.024 | 74.000 | 30.992 | PK |
| 3 | | 2407.218 | 92.228 | 61.258 | N/A | N/A | 30.970 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/17 - 00:46 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Edith Yu |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz | |

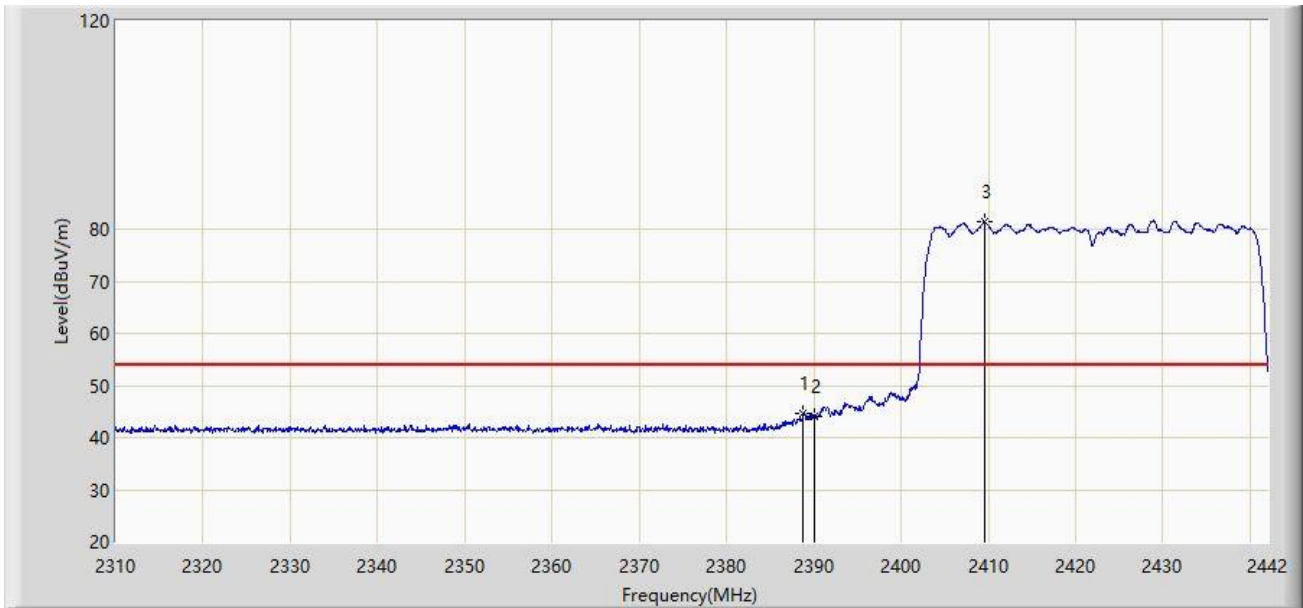

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2388.738 | 44.737 | 13.744 | -9.263 | 54.000 | 30.993 | AV |
| 2 | | 2390.000 | 44.030 | 13.038 | -9.970 | 54.000 | 30.992 | AV |
| 3 | | 2409.528 | 81.387 | 50.425 | N/A | N/A | 30.962 | AV |


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Radio 1 – Filter 3#:

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:05 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at 2462MHz | |

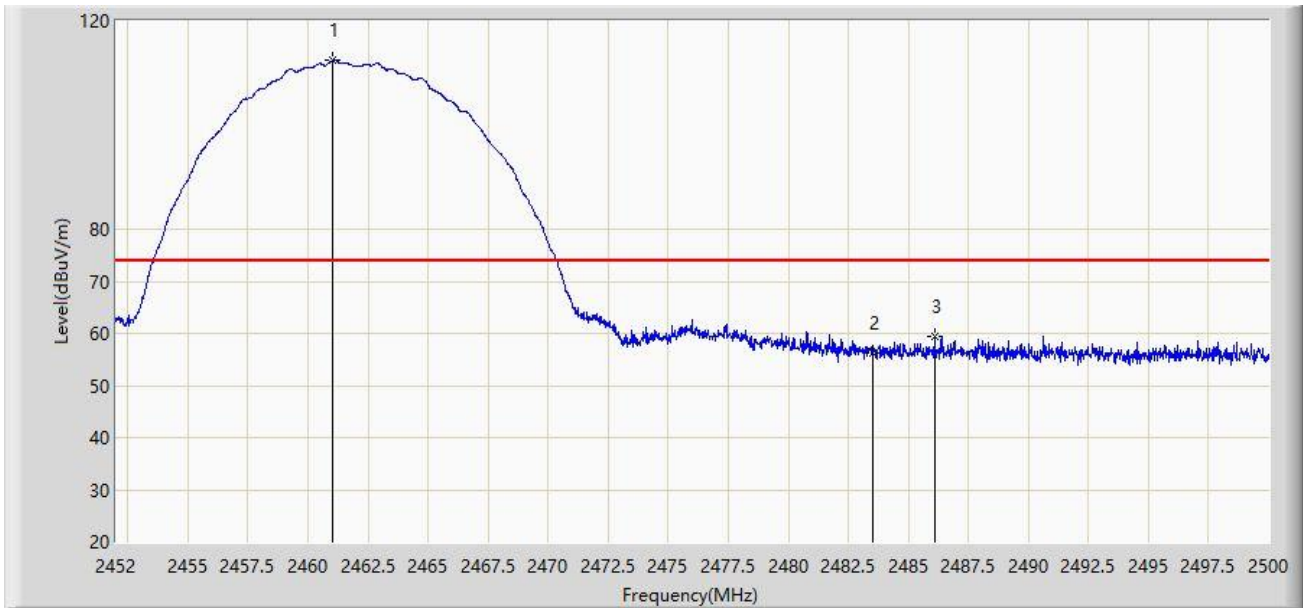

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2461.048 | 112.412 | 81.532 | N/A | N/A | 30.880 | PK |
| 2 | | 2483.500 | 56.334 | 25.443 | -17.666 | 74.000 | 30.892 | PK |
| 3 | * | 2486.080 | 59.385 | 28.498 | -14.615 | 74.000 | 30.887 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:20 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at 2462MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2461.144 | 110.241 | 79.361 | N/A | N/A | 30.880 | AV |
| 2 | * | 2483.500 | 43.730 | 12.839 | -10.270 | 54.000 | 30.892 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:21 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at 2462MHz | |

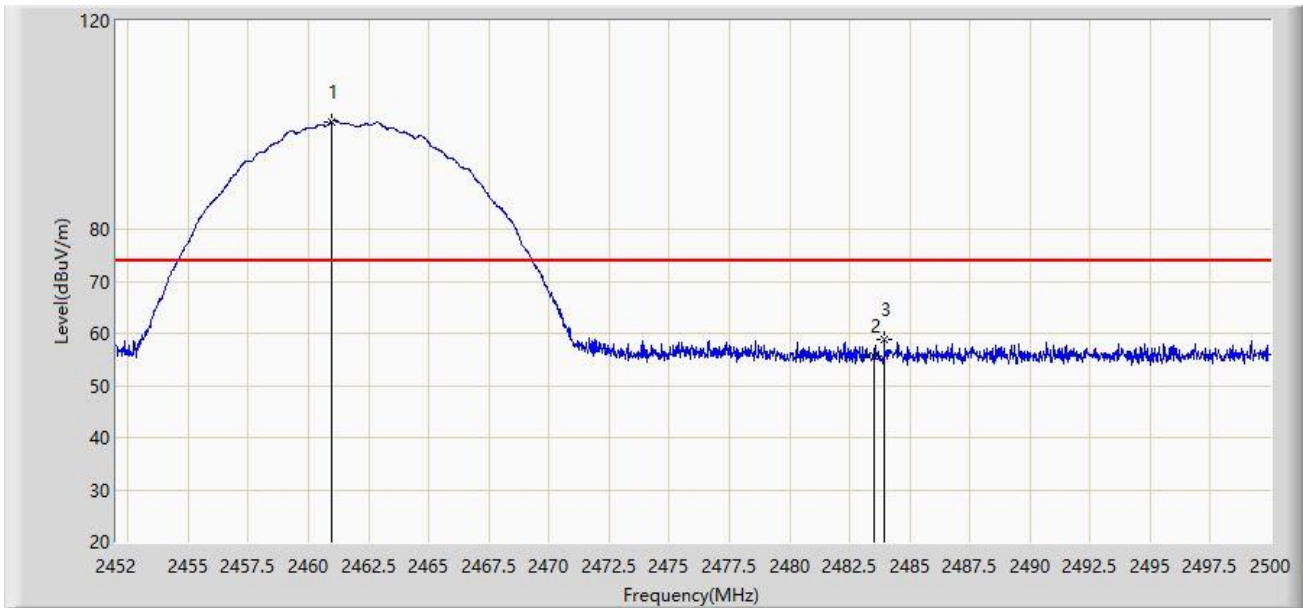

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2460.976 | 100.656 | 69.776 | N/A | N/A | 30.880 | PK |
| 2 | | 2483.500 | 55.708 | 24.817 | -18.292 | 74.000 | 30.892 | PK |
| 3 | * | 2483.944 | 58.742 | 27.851 | -15.258 | 74.000 | 30.891 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:22 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at 2462MHz | |



| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2461.144 | 98.739 | 67.859 | N/A | N/A | 30.880 | AV |
| 2 | * | 2483.500 | 41.055 | 10.164 | -12.945 | 54.000 | 30.892 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:41 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2462MHz | |



| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2455.144 | 112.547 | 81.676 | N/A | N/A | 30.870 | PK |
| 2 | | 2483.500 | 72.096 | 41.205 | -1.904 | 74.000 | 30.892 | PK |
| 3 | * | 2483.512 | 72.664 | 41.773 | -1.336 | 74.000 | 30.892 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:42 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2462MHz | |



| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2454.952 | 104.642 | 73.771 | N/A | N/A | 30.871 | AV |
| 2 | * | 2483.500 | 51.266 | 20.375 | -2.734 | 54.000 | 30.892 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:44 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2462MHz | |



| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2455.120 | 101.578 | 70.707 | N/A | N/A | 30.870 | PK |
| 2 | | 2483.500 | 63.437 | 32.546 | -10.563 | 74.000 | 30.892 | PK |
| 3 | * | 2483.536 | 65.139 | 34.248 | -8.861 | 74.000 | 30.892 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:45 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11g at 2462MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2455.912 | 93.779 | 62.908 | N/A | N/A | 30.872 | AV |
| 2 | * | 2483.500 | 44.512 | 13.621 | -9.488 | 54.000 | 30.892 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:57 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz | |

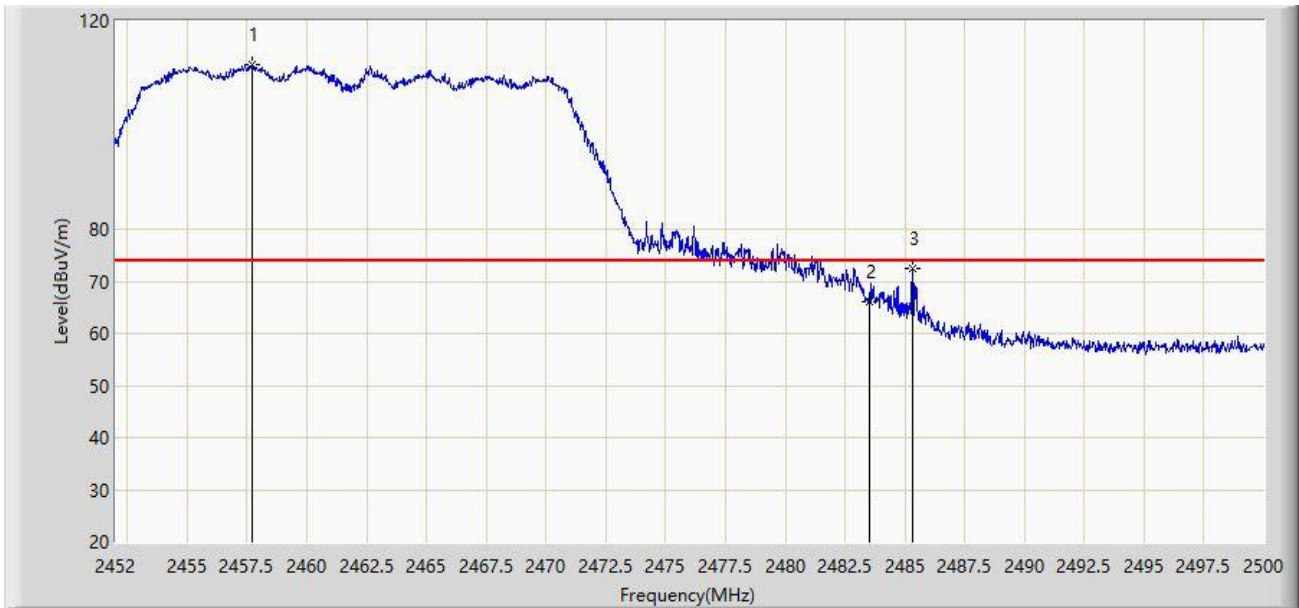


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2457.712 | 111.579 | 80.705 | N/A | N/A | 30.874 | PK |
| 2 | | 2483.500 | 66.102 | 35.211 | -7.898 | 74.000 | 30.892 | PK |
| 3 | * | 2485.336 | 72.372 | 41.484 | -1.628 | 74.000 | 30.889 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:55 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz | |

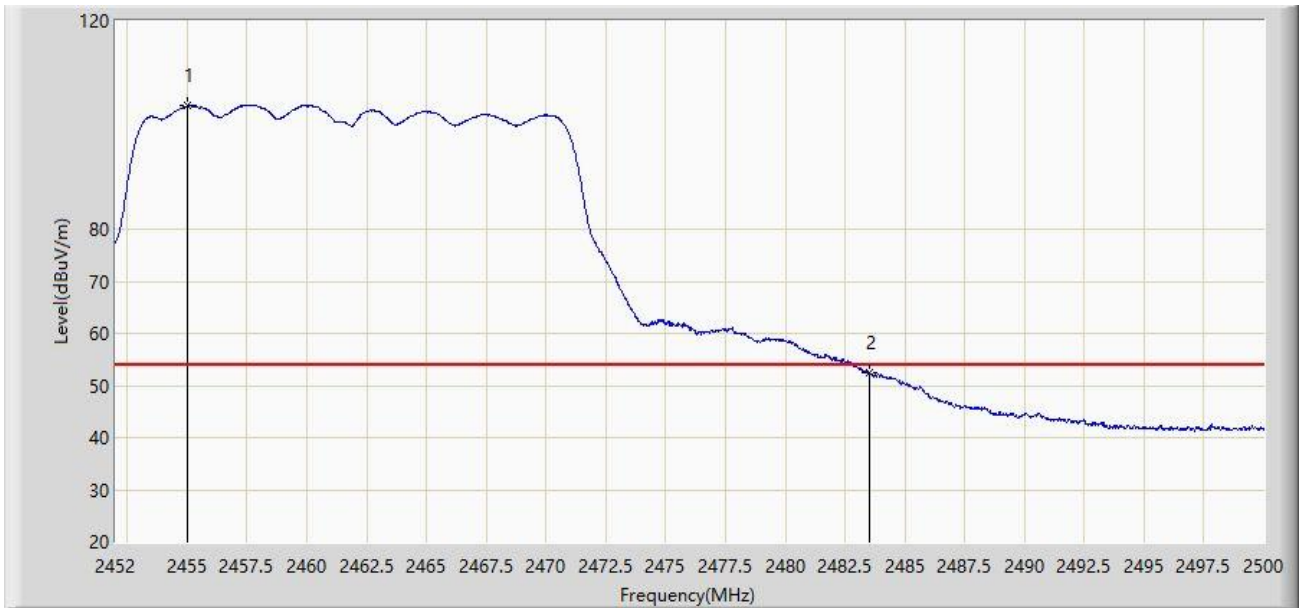


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2455.024 | 103.729 | 72.858 | N/A | N/A | 30.871 | AV |
| 2 | * | 2483.500 | 52.492 | 21.601 | -1.508 | 54.000 | 30.892 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:58 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz | |

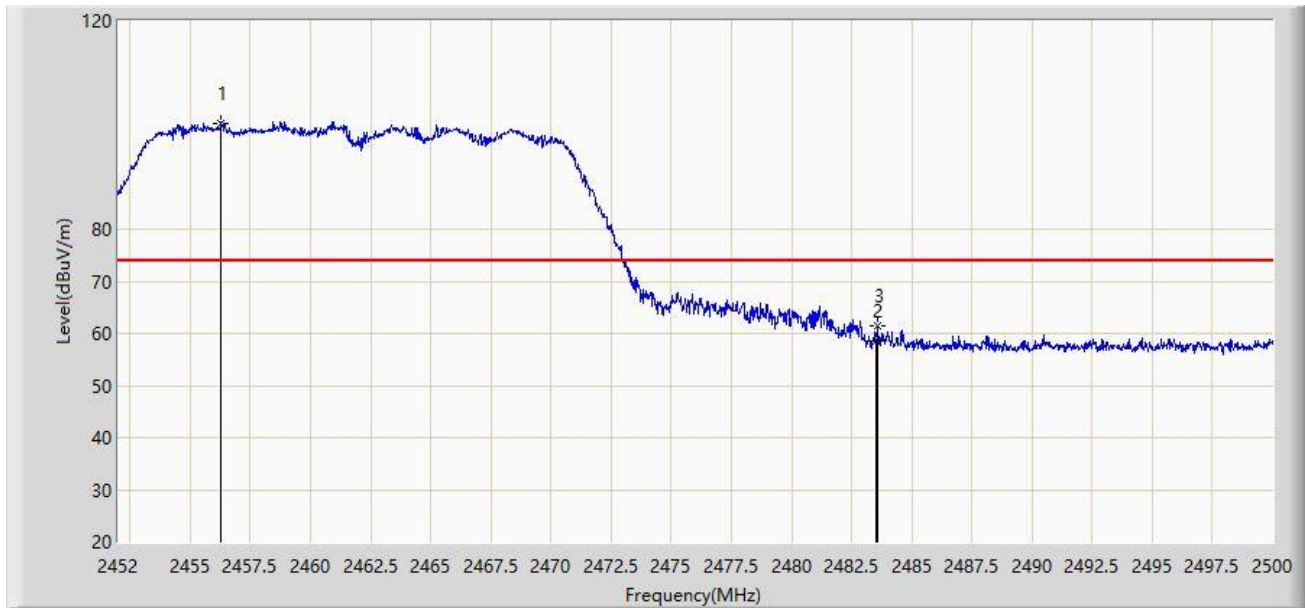


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2456.272 | 100.431 | 69.559 | N/A | N/A | 30.871 | PK |
| 2 | | 2483.500 | 58.589 | 27.698 | -15.411 | 74.000 | 30.892 | PK |
| 3 | * | 2483.608 | 61.445 | 30.554 | -12.555 | 74.000 | 30.892 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/13 - 23:59 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz | |

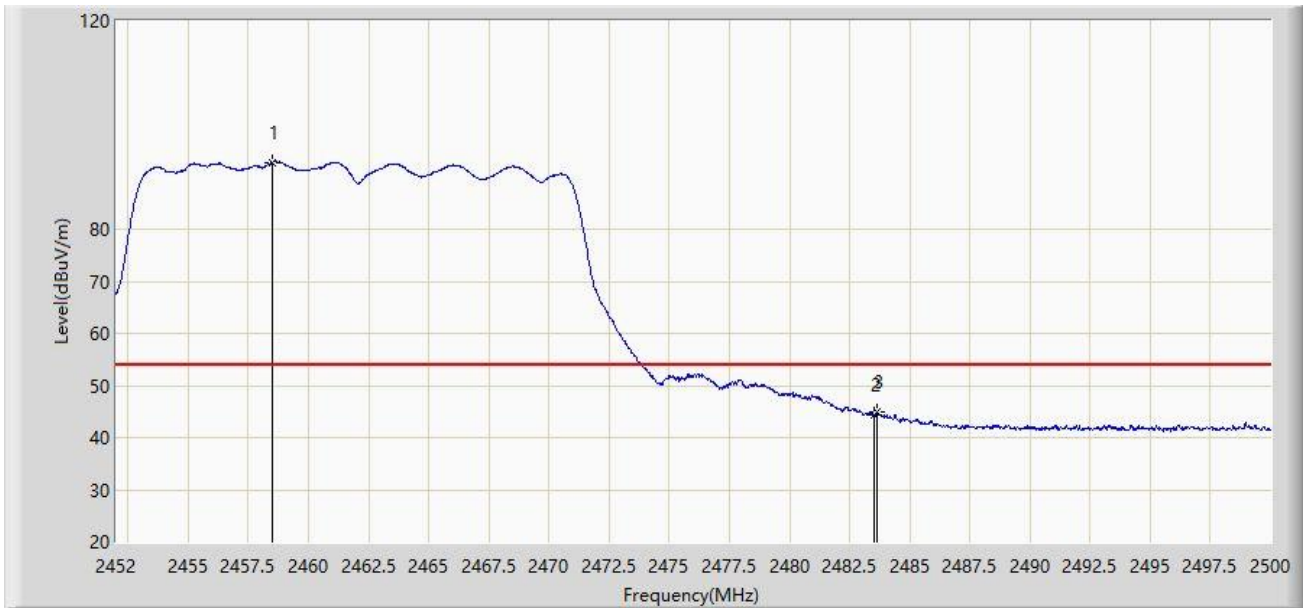

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2458.504 | 92.859 | 61.983 | N/A | N/A | 30.875 | AV |
| 2 | | 2483.500 | 44.217 | 13.326 | -9.783 | 54.000 | 30.892 | AV |
| 3 | * | 2483.656 | 44.853 | 13.962 | -9.147 | 54.000 | 30.892 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/14 - 00:10 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz | |



| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2458.792 | 114.904 | 84.028 | N/A | N/A | 30.876 | PK |
| 2 | | 2483.500 | 69.048 | 38.157 | -4.952 | 74.000 | 30.892 | PK |
| 3 | * | 2483.656 | 70.883 | 39.992 | -3.117 | 74.000 | 30.892 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/14 - 00:09 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz | |




| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2455.912 | 103.127 | 72.256 | N/A | N/A | 30.872 | AV |
| 2 | | 2483.500 | 53.192 | 22.301 | -0.808 | 54.000 | 30.892 | AV |
| 3 | * | 2483.872 | 53.418 | 22.527 | -0.582 | 54.000 | 30.891 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/14 - 00:11 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz | |

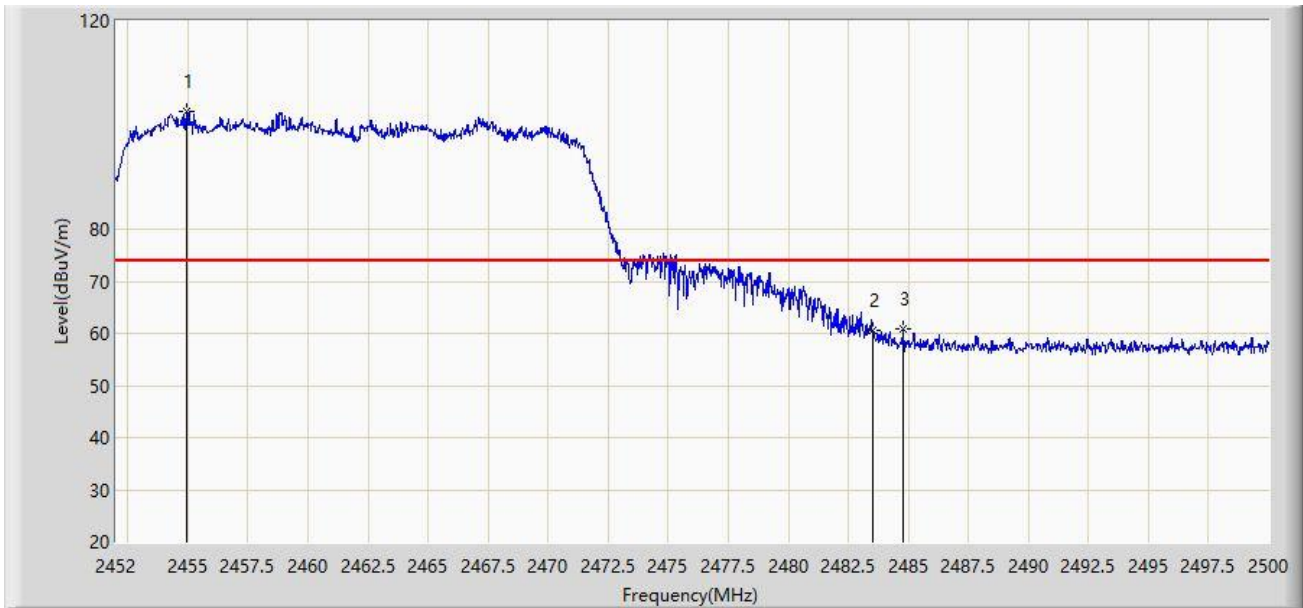

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2454.928 | 102.549 | 71.678 | N/A | N/A | 30.871 | PK |
| 2 | | 2483.500 | 60.493 | 29.602 | -13.507 | 74.000 | 30.892 | PK |
| 3 | * | 2484.784 | 61.012 | 30.123 | -12.988 | 74.000 | 30.890 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2022/12/14 - 00:13 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz | |



| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2457.232 | 92.221 | 61.347 | N/A | N/A | 30.873 | AV |
| 2 | | 2483.500 | 44.173 | 13.282 | -9.827 | 54.000 | 30.892 | AV |
| 3 | * | 2484.064 | 44.833 | 13.942 | -9.167 | 54.000 | 30.891 | AV |


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

| | |
|--|--------------------------|
| Site: WZ-SR2 | Time: 2023/03/20 - 17:24 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Alin Zhou |
| Probe: ENV216_101683_Filter Off | Polarity: Line |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at channel 2462MHz | |

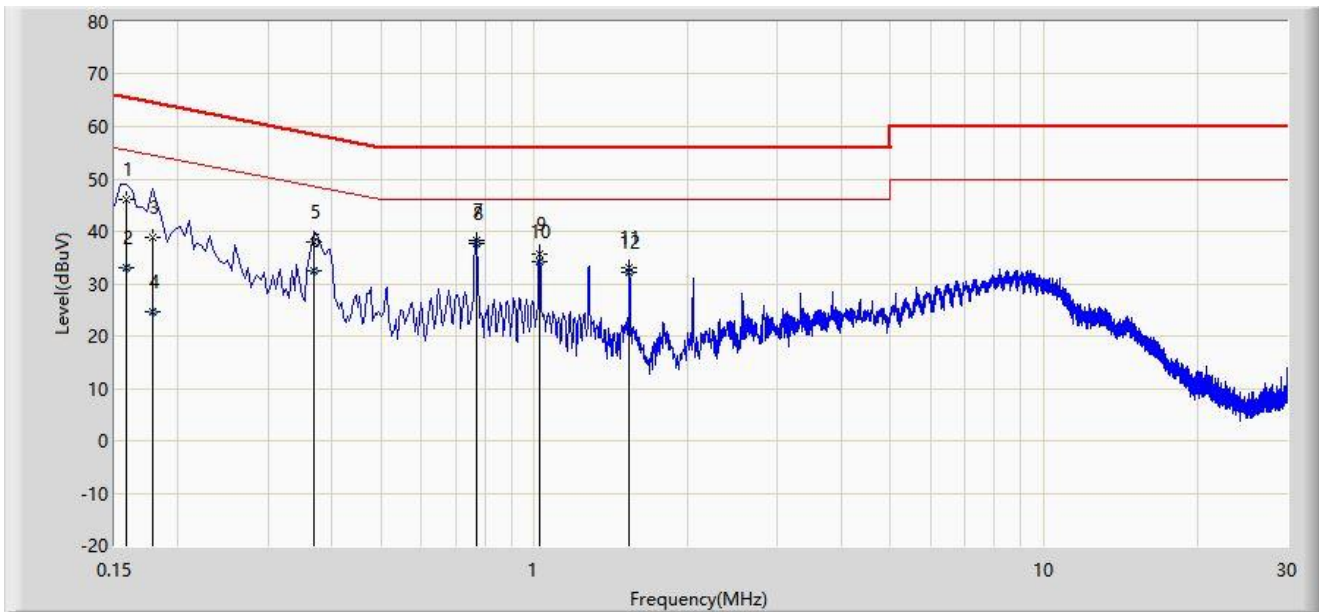


| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1 | | 0.158 | 46.106 | 36.501 | -19.462 | 65.568 | 9.606 | QP |
| 2 | | 0.158 | 33.103 | 23.498 | -22.465 | 55.568 | 9.606 | AV |
| 3 | | 0.178 | 38.973 | 29.362 | -25.606 | 64.578 | 9.610 | QP |
| 4 | | 0.178 | 24.625 | 15.015 | -29.953 | 54.578 | 9.610 | AV |
| 5 | | 0.370 | 38.046 | 28.363 | -20.455 | 58.501 | 9.683 | QP |
| 6 | | 0.370 | 32.465 | 22.782 | -16.036 | 48.501 | 9.683 | AV |
| 7 | | 0.770 | 38.214 | 28.329 | -17.786 | 56.000 | 9.885 | QP |
| 8 | * | 0.770 | 37.741 | 27.857 | -8.259 | 46.000 | 9.885 | AV |
| 9 | | 1.022 | 35.650 | 25.661 | -20.350 | 56.000 | 9.990 | QP |
| 10 | | 1.022 | 34.301 | 24.312 | -11.699 | 46.000 | 9.990 | AV |
| 11 | | 1.538 | 33.185 | 23.188 | -22.815 | 56.000 | 9.997 | QP |
| 12 | | 1.538 | 32.215 | 22.218 | -13.785 | 46.000 | 9.997 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

| | |
|--|--------------------------|
| Site: WZ-SR2 | Time: 2023/03/20 - 17:28 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Alin Zhou |
| Probe: ENV216_101683_Filter Off | Polarity: Neutral |
| EUT: ACCESS POINT | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11b at channel 2462MHz | |

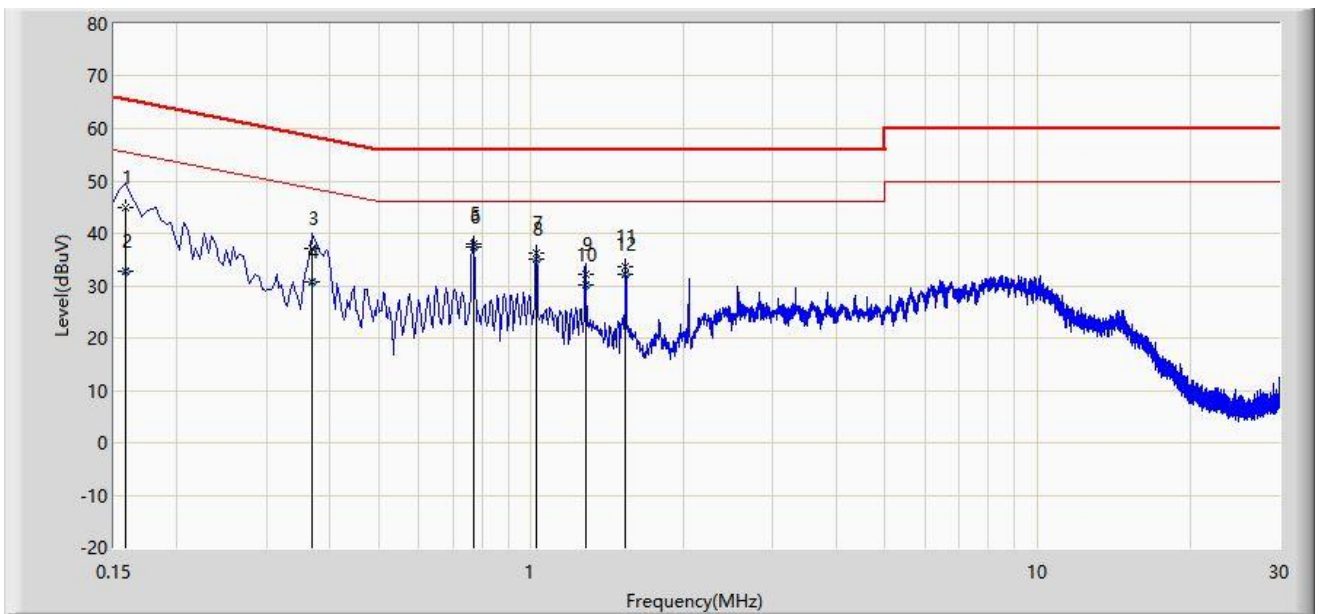

| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1 | | 0.158 | 44.807 | 35.237 | -20.761 | 65.568 | 9.571 | QP |
| 2 | | 0.158 | 32.672 | 23.101 | -22.897 | 55.568 | 9.571 | AV |
| 3 | | 0.370 | 37.162 | 27.484 | -21.338 | 58.501 | 9.679 | QP |
| 4 | | 0.370 | 30.778 | 21.100 | -17.723 | 48.501 | 9.679 | AV |
| 5 | | 0.770 | 38.062 | 28.182 | -17.938 | 56.000 | 9.880 | QP |
| 6 | * | 0.770 | 37.508 | 27.628 | -8.492 | 46.000 | 9.880 | AV |
| 7 | | 1.026 | 36.242 | 26.242 | -19.758 | 56.000 | 10.000 | QP |
| 8 | | 1.026 | 35.162 | 25.162 | -10.838 | 46.000 | 10.000 | AV |
| 9 | | 1.282 | 32.222 | 22.222 | -23.778 | 56.000 | 10.000 | QP |
| 10 | | 1.282 | 30.135 | 20.134 | -15.865 | 46.000 | 10.000 | AV |
| 11 | | 1.538 | 33.614 | 23.612 | -22.386 | 56.000 | 10.002 | QP |
| 12 | | 1.538 | 32.298 | 22.296 | -13.702 | 46.000 | 10.002 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2209RSU069-UT” file.

Appendix C – EUT Photograph

Refer to “2209RSU069-UE” file.

————— The End —————