

RDL-3100 Family

Broadband Wireless Systems

RDL-3100-RMA

Radio Modules

Product Manual

1	Product Overview	7
2	Conditions of Use	8
3	Module Installation and Service	9
4	Final Product Requirements	12
5	Regulatory Notices	39

Copyright Information

All rights reserved July 8, 2020. The information in this document is proprietary to Redline Communications Inc. This document may not in whole or in part be copied, reproduced, or reduced to any medium without prior consent in writing from Redline Communications Incorporated.

Contact Information

Contact Information: Redline Communications Inc. 302 Town Centre Blvd. Markham, ON Canada L3R 0E8
Web site: http://www.rdlcom.com
Email: Inquiries: info@rdlcom.com Support: support@rdlcom.com Training: training@rdlcom.com
Document Control: 70-00184-05-00-RDL-3100-RMA_Module_Product_Manual-20200708.doc

Disclaimer

The statements, configurations, technical data, and recommendations in this document are believed to be accurate and reliable but are presented without express or implied warranty. Additionally, Redline makes no representations or warranties, either expressed or implied, regarding the contents of this product. Redline Communications shall not be liable for any misuse regarding this product. The information in this document is subject to change without notice. No part of this document shall be deemed to be part of any warranty or contract unless specifically referenced to be part of such warranty or contract within this document.

TABLE OF CONTENTS

1	Product Overview	7
2	Conditions of Use	8
2.1	General Conditions	8
2.2	Country of Use	8
2.3	Product Labeling.....	9
2.3.1	Module Label	9
2.3.2	External Label.....	9
3	Module Installation and Service	9
3.1	Installation into a Final Product.....	9
3.2	Module Servicing	10
3.3	Professional Installation.....	11
3.4	Safety Precautions.....	11
3.5	Radio Frequency Safety	11
4	Final Product Requirements	12
4.1	Frequency Bands.....	12
4.1.1	Antenna Use and Transmit Power.....	12
4.1.2	Certified Antennas	12
4.1.3	Power & EIRP (MIMO Operation).....	13
	4940-4990 MHz: FCC 47 CFR Part 90 Subpart Y and RSS-111, Issue 5	13
	5150-5250 MHz: FCC 47 CFR Part 15 Subpart E, §15.407	15
	5250-5350 MHz Band FCC Part 15 Subpart E and RSS-247 Issue 2	19
	5470-5725 MHz Band FCC Part 15 Subpart E and RSS-247 Issue 2	23
	5725-5850 MHz: FCC Part 15 Subpart E and RSS-247 Issue 1 & 2	27
5	Regulatory Notices	39
5.1.1	FCC Notices	39
5.1.2	ISED Notices.....	40

LIST OF TABLES

Table 1: Approved Antennas	12
Table 2: FCC/ISED 4.9 GHz: Output Power: 0.875 MHz Channel, 10 dBi and 24 dBi Antennas	13
Table 3: FCC/ISED 4.9 GHz: Output Power: 0.875 MHz Channel, 32 dBi Antennas	13
Table 4: FCC/ISED 4.9 GHz: Output Power: 5 MHz Channel, 10 dBi and 24 dBi Antennas	13
Table 5: FCC/ISED 4.9 GHz: Output Power: 5 MHz Channel, 32 dBi Antennas	13
Table 6: FCC/ISED 4.9 GHz: Output Power: 10 MHz Channel, 10 dBi and 24 dBi Antennas	13
Table 7: FCC/ISED 4.9 GHz: Output Power: 10 MHz Channel, 32 dBi Antenna	13
Table 8: FCC/ISED 4.9 GHz: Output Power: 20 MHz Channel, 10 dBi and 24 dBi Antennas	14
Table 9: FCC/ISED 4.9 GHz: Output Power: 20 MHz Channel, 32 dBi Antenna	14
Table 10: FCC 5.15-5.25 GHz: Output Power: 0.875 MHz Channel, PMP 10 dBi Antenna	15
Table 11: FCC 5.15-5.25 GHz: Output Power: 0.875 MHz Channel, PMP 24 dBi Antenna	15
Table 12: FCC 5.15-5.25 GHz: Output Power: 0.875 MHz Channel, PMP 32 dBi Antenna	15
Table 13: FCC 5.15-5.25 GHz: Output Power: 5 MHz Channel, PMP 10 dBi Antenna...	15
Table 14: FCC 5.15-5.25 GHz: Output Power: 5 MHz Channel, PMP 24 dBi Antenna...	15
Table 15: FCC 5.15-5.25 GHz: Output Power: 5 MHz Channel, PMP 32 dBi Antenna...	15
Table 16: FCC 5.15-5.25 GHz: Output Power: 10 MHz Channel, PMP 10 dBi Antenna.	16
Table 17: FCC 5.15-5.25 GHz: Output Power: 10 MHz Channel, PMP 24 dBi Antenna.	16
Table 18: FCC 5.15-5.25 GHz: Output Power: 10 MHz Channel, PMP 32 dBi Antenna.	16
Table 19: FCC 5.15-5.25 GHz: Output Power: 20 MHz Channel, PMP 10 dBi Antenna.	16
Table 20: FCC 5.15-5.25 GHz: Output Power: 20 MHz Channel, PMP 24 dBi Antenna.	16
Table 21: FCC 5.15-5.25 GHz: Output Power: 20 MHz Channel, PMP 32 dBi Antenna.	17
Table 22: FCC 5.15-5.25 GHz: Output Power: 40 MHz Channel, PMP 10 dBi Antenna.	17
Table 23: FCC 5.15-5.25 GHz: Output Power: 40 MHz Channel, PMP 24 dBi Antenna.	17
Table 24: FCC 5.15-5.25 GHz: Output Power: 40 MHz Channel, PMP 32 dBi Antenna.	17
Table 25: FCC 5.15-5.25 GHz: Output Power: 45 MHz Channel, PMP 10 dBi Antenna.	17
Table 26: FCC 5.15-5.25 GHz: Output Power: 45 MHz Channel, PMP 24 dBi Antenna.	17
Table 27: FCC 5.15-5.25 GHz: Output Power: 45 MHz Channel, PMP 32 dBi Antenna.	18
Table 28: FCC 5.25-5.35 GHz: Output Power: 10 MHz Channel, 10 dBi Antenna	19
Table 29: FCC 5.25-5.35 GHz: Output Power: 10 MHz Channel, 24 dBi Antenna	19
Table 30: FCC 5.25-5.35 GHz: Output Power: 10 MHz Channel, 32 dBi Antenna	19
Table 31: FCC 5.25-5.35 GHz: Output Power: 20 MHz Channel, 10 dBi Antenna	19
Table 32: FCC 5.25-5.35 GHz: Output Power: 20 MHz Channel, 24 dBi Antenna	19
Table 33: FCC 5.25-5.35 GHz: Output Power: 20 MHz Channel, 32 dBi Antenna	20
Table 34: FCC 5.25-5.35 GHz: Output Power: 40 MHz Channel, 10 dBi Antenna	20
Table 35: FCC 5.25-5.35 GHz: Output Power: 40 MHz Channel, 24 dBi Antenna	20
Table 36: FCC 5.25-5.35 GHz: Output Power: 40 MHz Channel, 32 dBi Antenna	20
Table 37: ISED 5.25-5.35 GHz: Output Power: 10 MHz Channel, 10 dBi Antenna	20
Table 38: ISED 5.25-5.35 GHz: Output Power: 10 MHz Channel, 24 dBi Antenna	21
Table 39: ISED 5.25-5.35 GHz: Output Power: 10 MHz Channel, 32 dBi Antenna	21
Table 40: ISED 5.25-5.35 GHz: Output Power: 20 MHz Channel, 10 dBi Antenna	21
Table 41: ISED 5.25-5.35 GHz: Output Power: 20 MHz Channel, 24 dBi Antenna	21
Table 42: ISED 5.25-5.35 GHz: Output Power: 20 MHz Channel, 32 dBi Antenna	21
Table 43: ISED 5.25-5.35 GHz: Output Power: 40 MHz Channel, 10 dBi Antenna	22

Table 44: ISED 5.25-5.35 GHz: Output Power: 40 MHz Channel, 24 dBi Antenna	22
Table 45: ISED 5.25-5.35 GHz: Output Power: 40 MHz Channel, 32 dBi Antenna	22
Table 46: FCC 5.47-5.725 GHz Output Power: 10 MHz Channel, 10 dBi Antenna	23
Table 47: FCC 5.47-5.725 GHz Output Power: 10 MHz Channel, 24 dBi Antenna	23
Table 48: FCC 5.47-5.725 GHz Output Power: 10 MHz Channel, 32 dBi Antenna	23
Table 49: FCC 5.47-5.725 GHz Output Power: 20 MHz Channel, 10 dBi Antenna	23
Table 50: FCC 5.47-5.725 GHz Output Power: 20 MHz Channel, 24 dBi Antenna	23
Table 51: FCC 5.47-5.725 GHz Output Power: 20 MHz Channel, 32 dBi Antenna	24
Table 52: FCC 5.47-5.725 GHz Output Power: 40 MHz Channel, 10 dBi Antenna	24
Table 53: FCC 5.47-5.725 GHz Output Power: 40 MHz Channel, 24 dBi Antenna	24
Table 54: FCC 5.47-5.725 GHz Output Power: 40 MHz Channel, 32 dBi Antenna	24
Table 55: ISED 5.47-5.725 GHz Output Power: 10 MHz Channel, 10 dBi Antenna	25
Table 56: ISED 5.47-5.725 GHz Output Power: 10 MHz Channel, 24 dBi Antenna	25
Table 57: ISED 5.47-5.725 GHz Output Power: 10 MHz Channel, 32 dBi Antenna	25
Table 58: ISED 5.47-5.725 GHz Output Power: 20 MHz Channel, 10 dBi Antenna	25
Table 59: ISED 5.47-5.725 GHz Output Power: 20 MHz Channel, 24 dBi Antenna	25
Table 60: ISED 5.47-5.725 GHz Output Power: 20 MHz Channel, 32 dBi Antenna	26
Table 61: ISED 5.47-5.725 GHz Output Power: 40 MHz Channel, 10 dBi Antenna	26
Table 62: ISED 5.47-5.725 GHz Output Power: 40 MHz Channel, 24 dBi Antenna	26
Table 63: ISED 5.47-5.725 GHz Output Power: 40 MHz Channel, 32 dBi Antenna	26
Table 64: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 10 dBi Antenna	27
Table 65: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 24 dBi Antenna	27
Table 66: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 32 dBi Antenna	27
Table 67: FCC 5.8 GHz: Output Power: 5 MHz Channel, PMP 10 dBi Antenna	27
Table 68: FCC 5.8 GHz: Output Power: 5 MHz Channel, PMP 24 dBi Antenna	27
Table 69: FCC 5.8 GHz: Output Power: 5 MHz Channel, PMP 32 dBi Antenna	27
Table 70: FCC 5.8 GHz: Output Power: 10 MHz Channel, PMP 10 dBi Antenna	28
Table 71: FCC 5.8 GHz: Output Power: 10 MHz Channel, PMP 24 dBi Antenna	28
Table 72: FCC 5.8 GHz: Output Power: 10 MHz Channel, PMP 32 dBi Antenna	28
Table 73: FCC 5.8 GHz: Output Power: 20 MHz Channel, PMP 10 dBi Antenna	28
Table 74: FCC 5.8 GHz: Output Power: 20 MHz Channel, PMP 24 dBi Antenna	28
Table 75: FCC 5.8 GHz: Output Power: 20 MHz Channel, PMP 32 dBi Antenna	29
Table 76: FCC 5.8 GHz: Output Power: 40 MHz Channel, PMP 10 dBi Antenna	29
Table 77: FCC 5.8 GHz: Output Power: 40 MHz Channel, PMP 24 dBi Antenna	29
Table 78: FCC 5.8 GHz: Output Power: 40 MHz Channel, PMP 32 dBi Antenna	29
Table 79: FCC 5.8 GHz: Output Power: 45 MHz Channel, PMP 10 dBi Antenna	29
Table 80: FCC 5.8 GHz: Output Power: 45 MHz Channel, PMP 24 dBi Antenna	30
Table 81: FCC 5.8 GHz: Output Power: 45 MHz Channel, PMP 32 dBi Antenna	30
Table 82: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 10 dBi Antenna	31
Table 83: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 24 dBi Antenna	31
Table 84: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 32 dBi Antenna	31
Table 85: ISED 5.8 GHz: Output Power: 5 MHz Channel, PMP 10 dBi Antenna	31
Table 86: ISED 5.8 GHz: Output Power: 5 MHz Channel, PMP 24 dBi Antenna	31
Table 87: ISED 5.8 GHz: Output Power: 5 MHz Channel, PMP 32 dBi Antenna	31
Table 88: ISED 5.8 GHz: Output Power: 10 MHz Channel, PMP 10 dBi Antenna	32
Table 89: ISED 5.8 GHz: Output Power: 10 MHz Channel, PMP 24 dBi Antenna	32
Table 90: ISED 5.8 GHz: Output Power: 10 MHz Channel, PMP 32 dBi Antenna	32
Table 91: ISED 5.8 GHz: Output Power: 20 MHz Channel, PMP 10 dBi Antenna	32

Table 92: ISED 5.8 GHz: Output Power: 20 MHz Channel, PMP 24 dBi Antenna.....	32
Table 93: ISED 5.8 GHz: Output Power: 20 MHz Channel, PMP 32 dBi Antenna.....	33
Table 94: ISED 5.8 GHz: Output Power: 40 MHz Channel, PMP 10 dBi Antenna.....	33
Table 95: ISED 5.8 GHz: Output Power: 40 MHz Channel, PMP 24 dBi Antenna.....	33
Table 96: ISED 5.8 GHz: Output Power: 40 MHz Channel, PMP 32 dBi Antenna.....	33
Table 97: ISED 5.8 GHz: Output Power: 45 MHz Channel, PMP 10 dBi Antenna.....	33
Table 98: ISED 5.8 GHz: Output Power: 45 MHz Channel, PMP 24 dBi Antenna.....	34
Table 99: ISED 5.8 GHz: Output Power: 45 MHz Channel, PMP 32 dBi Antenna.....	34
Table 100: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PTP Application	35
Table 101: FCC 5.8 GHz: Output Power: 5 MHz Channel, PTP Application	35
Table 102: FCC 5.8 GHz: Output Power: 10 MHz Channel, PTP 10 & 24 dBi Antenna .	35
Table 103: FCC 5.8 GHz: Output Power: 10 MHz Channel, PTP 32 dBi Antenna	35
Table 104: FCC 5.8 GHz: Output Power: 20 MHz Channel, PTP 10 & 24 dBi Antenna .	35
Table 105: FCC 5.8 GHz: Output Power: 20 MHz Channel, PTP 32 dBi Antenna	35
Table 106: FCC 5.8 GHz: Output Power: 40 MHz Channel, PTP 10 & 24 dBi Antenna .	36
Table 107: FCC 5.8 GHz: Output Power: 40 MHz Channel, PTP 32 dBi Antenna	36
Table 108: FCC 5.8 GHz: Output Power: 45 MHz Channel, PTP Application	36
Table 109: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PTP Application	37
Table 110: ISED 5.8 GHz: Output Power: 5 MHz Channel, PTP Application	37
Table 111: ISED 5.8 GHz: Output Power: 10 MHz Channel, PTP 10 dBi Antenna	37
Table 112: ISED 5.8 GHz: Output Power: 10 MHz Channel, PTP 24 dBi Antenna	37
Table 113: ISED 5.8 GHz: Output Power: 10 MHz Channel, PTP 32 dBi Antenna	37
Table 114: ISED 5.8 GHz: Output Power: 20 MHz Channel, PTP 10 dBi Antenna	37
Table 115: ISED 5.8 GHz: Output Power: 20 MHz Channel, PTP 24 dBi Antenna	38
Table 116: ISED 5.8 GHz: Output Power: 20 MHz Channel, PTP 32 dBi Antenna	38
Table 117: ISED 5.8 GHz: Output Power: 40 MHz Channel, PTP 10 dBi Antenna	38
Table 118: ISED 5.8 GHz: Output Power: 40 MHz Channel, PTP 24 dBi Antenna	38
Table 119: ISED 5.8 GHz: Output Power: 40 MHz Channel, PTP 32 dBi Antenna	38
Table 120: ISED 5.8 GHz: Output Power: 45 MHz Channel, PTP Application	38
Table 121: FCC: RDL-3100-RMA Recommended Safe Distances	39
Table 122: ISED: RDL-3100-RMA Recommended Safe Distances	40
Table 123: ISED: RDL-3100-RMA distances de sécurité recommandées.....	41

1 Product Overview

The RDL-3100-RMA radio module is comprised of a proprietary Media Access Control (MAC) protocol engine and Time Division Duplexing (TDD)/ Orthogonal Frequency Division Duplexing (OFDM) digital radio.

The module is not designed for stand-alone operation. The module is sold as one component of a packaged system which includes a suitable housing for the module connectors for required external components including a power supply and antenna system. This is afterwards referred to as the 'final product'. The final product may be designed and manufactured by Redline or a licensed third party.

Frequency settings within the specified frequency ranges are software keyed to be compliant with specific regulatory agency requirements in the region of deployment.

USA & Canada: 4900 to 5975 MHz

Important: Read this entire document prior to installing or operating these modules.

2 Conditions of Use

2.1 General Conditions

The RDL-3100-RMA module is not provided for sale to the general public. The module contains a proprietary radio interface and cannot be directly connected to any standard telecommunications or computer devices. This manual is provided as supplement to technical and operational documentation and training provided by Redline and its agents.

Any operation or use of this module in any manner not expressly specified within this manual or approved in writing by Redline (or its agents) is expressly forbidden and voids the users right to operate the module. This includes, but is not limited to, any modification of the module hardware or software, installation of the module in a non-approved enclosure, and use with non-approved antennas.

2.2 Country of Use

Refer to the regulatory notices in this document before installing or operating the module.

Operation of the final product requires a software 'key' that is available exclusively from Redline or its authorized agents. The software key is unique to each module and must be installed and activated before the radio will operate. The key contains sufficient security features that the professional installer and operator cannot decode, modify, substitute, or otherwise circumvent the operational restrictions imposed by the 'key'.

The software 'key' limits the transmit power, operating frequency range, and channel bandwidth per the regulator domain governing the location where the radio will be deployed. The operator does not have the option to select the country or regulatory region of operation.

A radio can be configured in either master or client mode of operation. A radio in client mode is always 'passive listener' and cannot initiate any transmission without receiving and decoding a valid authorization message from a licensed master. A radio in master mode (whether from start or after being switched from client mode) checks and controls all functionality of a given radio as a master - including full DFS capabilities as required - based on license key. The license key is issued to customers for every unit, based on geographic location of the unit (e.g., US), with all the required regulatory compliance parameters enabled to ensure compliance.

Operation in the United States

The RDL-3100-RMA module is certified with limited modular approval for use as an 'intentional radiator' in the United States as device FCC ID: QC8-RDL3100RMA.

Operation in Canada


The RDL-3100-RMA module is certified with limited modular approval for use as an 'intentional radiator' in the Canada as IC: 4310A-RDL3100RMA.

2.3 Product Labeling

2.3.1 Module Label

The modular transmitter will display a label referring to the FCC ID registration number and the IC registration number. An information label is applied directly to the modular transmitter (example shown below).

Do not to remove any labels from the module.

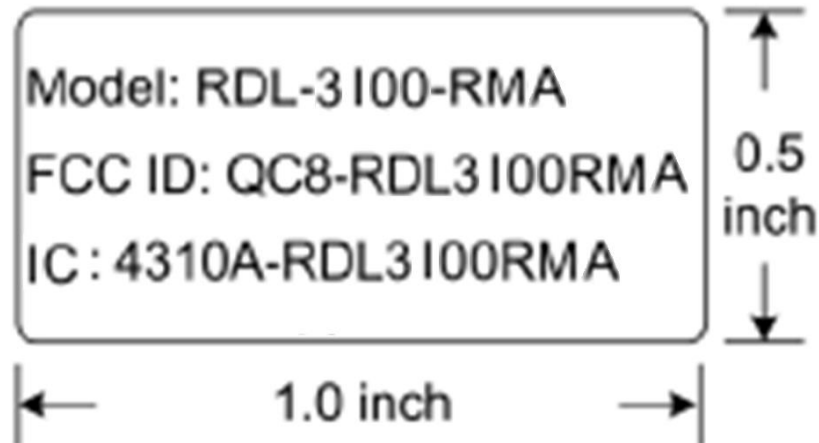

2.3.2 External Label

Information labels are applied to the final product. The final product features a label on the outside surface listing the registration number for the enclosed module. Do not to remove any labels from the module or the final product.



3 Module Installation and Service

3.1 Installation into a Final Product

The module must be installed only by trained professional technicians authorized by Redline or its agents. The module must be installed only into an approved enclosure (see Conditions of Use) and only at an approved manufacturing facility or service depot.

Redline shall retain complete control over the final installation of the module and will ensure compliance of the end product to all applicable regulations. The module must be installed only into an approved enclosure (see Conditions of Use) and only at an approved manufacturing facility or service depot.

Redline licensing of the modular transmitter includes monitoring to ensure compliance in the operation and use of the module as expressly specified within this manual. This includes restrictions against modification of the module hardware, approval of the final

enclosure, operational restrictions for installers and end-users, and approval of antennas provided for use with the product.

Operation of the final product requires the 'key' be controlled exclusively by the manufacturer. The 'key' must be unique to each module and must be installed and activated before the radio will operate. The key must contain sufficient security features to the professional installer and operator cannot decode, modify, substitute, or otherwise circumvent the operational restrictions imposed by the 'key'.

The software 'key' must limit the transmit power, operating frequency range, and channel bandwidth per the regulator domain governing the location where the radio will be deployed. The operator does not have the option to select the country or regulatory region of operation.

The software 'key' must limit the mode of operation as a master or client. The client mode is 'passive listener' and while in this mode the module cannot initiate any transmission without first receiving and decoding a valid authorization message from the master. A module with a key for client operation cannot be changed by the installer to enable master mode operation.

Redline will review all final products for compliance to regulatory restrictions.

The manufacturer must meet all labeling described in section 2.3.

3.2 Module Servicing

The module is not intended to be field serviceable and contains no field serviceable or field replaceable parts. The module must be serviced only at an approved manufacturing facility or service depot.



Warning: The module is susceptible to damage from electrostatic charge. Electrostatic Discharge (ESD) must be avoided to prevent damaging or destroying the module. The module must always be store in an anti-static container/bag prior to installation and following removal from the product for servicing. Observe ESD precautions when handling the module.

3.3 Professional Installation

Devices containing the module require professional installation. It is the responsibility of the installer to understand the product operation by attending training as required, reading and understanding the product documentation, and ensuring that all building, safety and regulatory codes are met and the installation is complete and secure.

3.4 Safety Precautions

Installation and service of the module must be performed by personnel having technical training and experience necessary to be aware of hazards during installation and/or service of RF equipment. The installation and/or service must be done using procedures designed to minimize any danger to technical personnel or any other person.

3.5 Radio Frequency Safety

The installer of this radio equipment must ensure the antenna is located or pointed such that it does not emit RF fields in excess of the general population limits as defined by:

- FCC CFR 47, Part 2.1091
<http://www.gpo.gov/fdsys/pkg/CFR-2009-title47-vol1/pdf/CFR-2009-title47-vol1-sec2-1091.pdf>
- FCC OET Bulletin 65, Radio frequency radiation exposure evaluation for fixed devices
http://transition.fcc.gov/Bureaus/Engineering_Technology/Documents/bulletins/oet65/oet65c.pdf
- Health Canada limits for the general population; consult Safety Code 6, obtainable from Health Canada's website:
<https://www.canada.ca/en/health-canada/services/environmental-workplace-health/reports-publications/radiation/safety-code-6-health-canada-radiofrequency-exposure-guidelines-environmental-workplace-health-health-canada.html>

Refer to the regulatory statements included in this document.

4 Final Product Requirements

The following requirements apply to all final products incorporating an RDL-3100-RMA module.

4.1 Frequency Bands

Operation of the final product requires a software 'key' that is available exclusively from Redline. This key restricts device operation to the FCC/ISED 4940-4990 MHz, 5250-5350 MHz, 5470-5725 MHz (excluding 5600-5650 MHz in Canada), or 5725-5850 MHz Bands and the FCC 5150-5250 MHz Band. The professional installer and operator can not modify or otherwise circumvent these operational restrictions.

4.1.1 Antenna Use and Transmit Power

The module supports operation with 2 x 2 MIMO antenna systems with two transmit chains and two receive chains. The module must be used only with certified antennas and using the channel size and output power level specified by the regulations.

4.1.2 Certified Antennas

This device has been designed to operate with the antennas listed in the following table. Any additional antennas will be used only after authorization is obtained through Class II permissive change.

Table 1: Approved Antennas

Manufacturer	Part #	Gain (dBi)	Frequency Range	4940-4990 MHz	5150-5250 MHz	5250-5360 MHz	5470-5725 MHz	5725-5850 MHz
Redline	AOD-DB-0512-02	10	4940-5875 MHz	PMP	PMP	PMP	PMP	PMP
L-Com	HG5158DP-10U	10	5100-5800 MHz	PMP	PMP	PMP	PMP	PMP
Redline	30-00362-00	24	4900-6100 MHz	PTP PMP	PMP	PTP PMP	PTP PMP	PTP PMP
Redline	A3FT3204LTPD	32	4900-5875 MHz	PTP PMP	PMP	PTP PMP	PTP PMP	PTP PMP

4.1.3 Power & EIRP (MIMO Operation)

4940-4990 MHz: FCC 47 CFR Part 90 Subpart Y and RSS-111, Issue 5

Table 2: FCC/ISED 4.9 GHz: Output Power: 0.875 MHz Channel, 10 dBi and 24 dBi Antennas

Modulation	Frequency, MHz	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4940.5	16.52	17.04	19.80	20.00	0.20
	4965.0	16.73	16.50	19.63	20.00	0.37
	4989.5	16.55	16.40	19.49	20.00	0.51

Table 3: FCC/ISED 4.9 GHz: Output Power: 0.875 MHz Channel, 32 dBi Antennas

Modulation	Frequency, MHz	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4940.5	11.59	11.29	14.45	14.70	0.25
	4965.0	11.54	11.42	14.49	14.70	0.21
	4989.5	11.62	11.66	14.65	14.70	0.05

Table 4: FCC/ISED 4.9 GHz: Output Power: 5 MHz Channel, 10 dBi and 24 dBi Antennas

Modulation	Frequency, MHz	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4942.5	21.08	21.40	24.24	27.00	2.75
	4965.0	21.81	21.66	24.75	27.00	2.25
	4987.5	21.86	21.68	24.78	27.00	2.22

Table 5: FCC/ISED 4.9 GHz: Output Power: 5 MHz Channel, 32 dBi Antennas

Modulation	Frequency, MHz	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4942.5	17.16	17.97	20.59	21.70	1.11
	4965.0	18.04	17.86	20.96	21.70	0.74
	4987.5	18.04	18.03	21.05	21.70	0.65

Table 6: FCC/ISED 4.9 GHz: Output Power: 10 MHz Channel, 10 dBi and 24 dBi Antennas

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4945.0	20.96	20.60	23.79	30.00	6.21
	4965.0	21.09	20.69	23.90	30.00	6.10
	4985.0	21.22	20.67	23.96	30.00	6.04
256-QAM	4945.0	21.00	20.57	23.80	30.00	6.20
	4965.0	21.05	20.72	23.90	30.00	6.10
	4985.0	20.23	20.65	23.46	30.00	6.54

Table 7: FCC/ISED 4.9 GHz: Output Power: 10 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4945.0	20.10	18.64	22.44	24.70	2.26
	4965.0	19.96	18.79	22.42	24.70	2.28
	4985.0	19.14	19.74	22.46	24.70	2.24
256-QAM	4945.0	20.14	18.65	22.47	24.70	2.23
	4965.0	19.92	18.82	22.42	24.70	2.28
	4985.0	19.08	19.75	22.44	24.70	2.26

Table 8: FCC/ISED 4.9 GHz: Output Power: 20 MHz Channel, 10 dBi and 24 dBi Antennas

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4950.0	21.38	21.18	24.29	33.00	8.71
	4965.0	21.37	21.16	24.28	33.00	8.72
	4980.0	21.49	21.25	24.38	33.00	8.62
256-QAM	4950.0	21.36	21.16	24.27	33.00	8.73
	4965.0	21.38	21.16	24.28	33.00	8.72
	4980.0	21.47	21.29	24.39	33.00	8.61

Table 9: FCC/ISED 4.9 GHz: Output Power: 20 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	4950.0	21.38	21.18	24.29	27.70	3.41
	4965.0	21.37	21.16	24.28	27.70	3.42
	4980.0	21.49	21.25	24.38	27.70	3.32
256-QAM	4950.0	21.36	21.16	24.27	27.70	3.43
	4965.0	21.38	21.16	24.28	27.70	3.42
	4980.0	21.47	21.29	24.39	27.70	3.31

5150-5250 MHz: FCC 47 CFR Part 15 Subpart E, §15.407

Table 10: FCC 5.15-5.25 GHz: Output Power: 0.875 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	13.67	15.06	17.43	26.70	9.27	26.73	36.00	9.27
256-QAM	5200.0	13.69	13.91	16.81	26.70	9.89	26.11	36.00	9.89

Table 11: FCC 5.15-5.25 GHz: Output Power: 0.875 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	-0.52	0.51	3.04	12.70	9.66	26.34	36.00	9.66
256-QAM	5200.0	-0.58	-0.35	2.55	12.70	10.15	25.85	36.00	10.15

Table 12: FCC 5.15-5.25 GHz: Output Power: 0.875 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	-8.65	-7.47	-5.01	4.70	9.71	26.29	36.00	9.71
256-QAM	5200.0	-8.74	-8.54	-5.63	4.70	10.33	25.67	36.00	10.33

Table 13: FCC 5.15-5.25 GHz: Output Power: 5 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	18.47	18.49	21.49	26.70	5.21	30.79	36.00	5.21
256-QAM	5200.0	18.55	18.59	21.58	26.70	5.12	30.88	36.00	5.12

Table 14: FCC 5.15-5.25 GHz: Output Power: 5 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	4.39	4.43	7.42	12.70	5.28	30.72	36.00	5.28
256-QAM	5200.0	4.32	4.42	7.38	12.70	5.32	30.68	36.00	5.32

Table 15: FCC 5.15-5.25 GHz: Output Power: 5 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	-3.65	-3.60	-0.61	4.70	5.31	30.69	36.00	5.31
256-QAM	5200.0	-3.55	-3.66	-0.59	4.70	5.29	30.71	36.00	5.29

Table 16: FCC 5.15-5.25 GHz: Output Power: 10 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5160.0	11.22	11.04	14.14	26.70	12.56
	5200.0	19.47	18.42	21.99	26.70	4.71
	5245.0	18.77	18.45	21.62	26.70	5.08
256-QAM	5165.0	12.11	11.59	14.87	26.70	11.83
	5200.0	19.50	18.45	22.02	26.70	4.68
	5245.0	18.83	18.48	21.67	26.70	5.03

Table 17: FCC 5.15-5.25 GHz: Output Power: 10 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5160.0	5.13	4.91	8.03	12.70	4.67
	5200.0	5.13	4.92	8.04	12.70	4.66
	5245.0	4.23	5.00	7.64	12.70	5.06
256-QAM	5160.0	4.92	4.92	7.93	12.70	4.77
	5200.0	5.14	4.95	8.06	12.70	4.64
	5245.0	4.28	5.00	7.67	12.70	5.03

Table 18: FCC 5.15-5.25 GHz: Output Power: 10 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5160.0	-3.11	-3.13	-0.11	4.70	4.81
	5200.0	-3.01	-3.55	-0.26	4.70	4.96
	5245.0	-3.90	-3.02	-0.43	4.70	5.13
256-QAM	5160.0	-3.22	-3.44	-0.32	4.70	5.02
	5200.0	-3.37	-3.48	-0.41	4.70	5.11
	5245.0	-3.89	-3.28	-0.56	4.70	5.26

Table 19: FCC 5.15-5.25 GHz: Output Power: 20 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5170.0	12.28	12.11	15.21	26.70	11.49
	5200.0	21.75	21.56	24.67	26.70	2.03
	5240.0	18.75	19.53	22.17	26.70	4.53
256-QAM	5175.0	12.47	13.22	15.87	26.70	10.83
	5200.0	21.80	21.56	24.69	26.70	2.01
	5240.0	18.66	19.48	22.10	26.70	4.60

Table 20: FCC 5.15-5.25 GHz: Output Power: 20 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5170.0	7.31	7.09	10.21	12.70	2.49
	5200.0	7.48	7.35	10.43	12.70	2.27
	5240.0	7.47	7.28	10.39	12.70	2.31
256-QAM	5170.0	7.31	7.11	10.22	12.70	2.48
	5200.0	7.45	7.34	10.41	12.70	2.29
	5240.0	7.47	7.30	10.40	12.70	2.30

Table 21: FCC 5.15-5.25 GHz: Output Power: 20 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5170.0	-0.82	-0.51	2.35	4.70	2.35
	5200.0	-0.95	-0.84	2.12	4.70	2.58
	5240.0	-0.89	-1.01	2.06	4.70	2.64
256-QAM	5170.0	-0.82	-0.30	2.46	4.70	2.24
	5200.0	-0.67	-0.90	2.23	4.70	2.47
	5240.0	-0.69	-0.94	2.20	4.70	2.50

Table 22: FCC 5.15-5.25 GHz: Output Power: 40 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5170.0	-3.08	-3.09	-0.07	26.70	26.77
	5200.0	22.01	21.97	25.00	26.70	1.70
	5230.0	18.71	17.45	21.14	26.70	5.56
256-QAM	5185.0	13.44	13.26	16.36	26.70	10.34
	5200.0	22.01	21.89	24.96	26.70	1.74
	5230.0	18.56	18.41	21.50	26.70	5.20

Table 23: FCC 5.15-5.25 GHz: Output Power: 40 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5170.0	9.04	8.93	12.00	12.70	0.70
	5200.0	9.02	8.91	11.98	12.70	0.72
	5230.0	8.95	8.84	11.91	12.70	0.79
256-QAM	5170.0	8.84	8.76	11.81	12.70	0.89
	5200.0	9.00	8.96	11.99	12.70	0.71
	5230.0	8.96	9.00	11.99	12.70	0.71

Table 24: FCC 5.15-5.25 GHz: Output Power: 40 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5170.0	0.80	0.85	3.84	4.70	0.86
	5200.0	0.78	0.73	3.77	4.70	0.93
	5230.0	0.68	0.63	3.67	4.70	1.03
256-QAM	5170.0	0.57	0.60	3.60	4.70	1.10
	5200.0	0.77	0.74	3.77	4.70	0.93
	5230.0	0.67	0.64	3.67	4.70	1.03

Table 25: FCC 5.15-5.25 GHz: Output Power: 45 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	21.76	22.03	24.91	26.70	1.79	34.21	36.00	1.79
256-QAM	5200.0	21.61	21.85	24.74	26.70	1.96	34.04	36.00	1.96

Table 26: FCC 5.15-5.25 GHz: Output Power: 45 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5200.0	10.02	9.12	12.60	12.70	0.10	35.90	36.00	0.10
256-QAM	5200.0	10.16	9.12	12.68	12.70	0.02	35.98	36.00	0.02

Table 27: FCC 5.15-5.25 GHz: Output Power: 45 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBM)	EIRP Margin (dBM)
BPSK	5200.0	1.99	1.12	4.59	4.70	0.11	35.89	36.00	0.11
256-QAM	5200.0	2.00	0.84	4.47	4.70	0.23	35.77	36.00	0.23

5250-5350 MHz Band FCC Part 15 Subpart E and RSS-247 Issue 2

Table 28: FCC 5.25-5.35 GHz: Output Power: 10 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5255	12.83	12.8	15.83	17.37	1.55
	5300	12.91	12.94	15.94	17.38	1.44
	5342.5	12.82	12.95	15.90	17.34	1.45
256-QAM	5255	12.88	12.76	15.83	17.32	1.49
	5300	12.89	12.96	15.94	17.33	1.40
	5342.5	12.81	12.99	15.91	17.38	1.47

Table 29: FCC 5.25-5.35 GHz: Output Power: 10 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5255	-0.51	-0.58	2.47	3.37	0.91
	5300	-0.47	-0.42	2.57	3.38	0.81
	5342.5	-0.49	-0.38	2.58	3.34	0.77
256-QAM	5255	-0.54	-0.56	2.46	3.32	0.86
	5300	-0.46	-0.42	2.57	3.33	0.76
	5342.5	-0.48	-0.36	2.59	3.38	0.79

Table 30: FCC 5.25-5.35 GHz: Output Power: 10 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5255	-8.51	-8.61	-5.55	-4.63	0.92
	5300	-8.48	-8.44	-5.45	-4.62	0.83
	5342.5	-8.49	-8.39	-5.43	-4.66	0.77
256-QAM	5255	-8.55	-8.57	-5.55	-4.68	0.87
	5300	-8.48	-8.46	-5.46	-4.67	0.79
	5342.5	-8.48	-8.37	-5.41	-4.62	0.79

Table 31: FCC 5.25-5.35 GHz: Output Power: 20 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5260	16.24	16.18	19.22	20.43	1.20
	5300	16.15	16.17	19.17	20.34	1.17
	5337.5	14.28	14.28	17.29	20.33	3.04
256-QAM	5260	16.12	16.04	19.09	20.38	1.29
	5300	16.18	16.18	19.19	20.34	1.15
	5337.5	14.30	14.25	17.29	20.33	3.05

Table 32: FCC 5.25-5.35 GHz: Output Power: 20 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5260	2.80	2.70	5.76	6.43	0.66
	5300	2.73	2.75	5.75	6.34	0.59
	5337.5	2.68	2.80	5.75	6.33	0.58
256-QAM	5260	2.67	2.65	5.67	6.38	0.71
	5300	2.72	2.76	5.75	6.34	0.59
	5337.5	2.70	2.80	5.76	6.33	0.57

Table 33: FCC 5.25-5.35 GHz: Output Power: 20 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5260	-5.42	-5.35	-2.37	-1.57	0.80
	5300	-5.30	-5.28	-2.28	-1.66	0.62
	5337.5	-5.33	-5.26	-2.28	-1.67	0.62
256-QAM	5260	-5.34	-5.39	-2.35	-1.62	0.73
	5300	-5.29	-5.28	-2.27	-1.66	0.62
	5337.5	-5.32	-5.25	-2.27	-1.67	0.61

Table 34: FCC 5.25-5.35 GHz: Output Power: 40 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5270	17.53	17.13	20.34	20.70	0.36
	5300	17.53	17.21	20.38	20.70	0.32
	5327.5	16.18	16.21	19.21	20.70	1.49
256-QAM	5270	17.52	17.12	20.33	20.70	0.37
	5300	17.55	17.22	20.40	20.70	0.30
	5327.5	16.20	16.23	19.23	20.70	1.47

Table 35: FCC 5.25-5.35 GHz: Output Power: 40 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5270	2.94	2.66	5.81	6.70	0.89
	5300	2.95	2.78	5.88	6.70	0.82
	5327.5	2.72	2.78	5.76	6.70	0.94
256-QAM	5270	2.93	2.67	5.81	6.70	0.89
	5300	2.96	2.76	5.87	6.70	0.83
	5327.5	2.73	2.80	5.78	6.70	0.92

Table 36: FCC 5.25-5.35 GHz: Output Power: 40 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5270	-5.07	-5.38	-2.21	-1.30	0.91
	5300	-5.02	-5.31	-2.15	-1.30	0.85
	5327.5	-5.31	-5.25	-2.27	-1.30	0.97
256-QAM	5270	-5.07	-5.38	-2.21	-1.30	0.91
	5300	-5.03	-5.28	-2.14	-1.30	0.84
	5327.5	-5.28	-5.26	-2.26	-1.30	0.96

Table 37: ISD 5.25-5.35 GHz: Output Power: 10 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5255	6.18	6.08	9.14	16.83	7.69
	5300	10.33	10.37	13.36	16.83	3.47
	5342.5	10.32	10.43	13.39	16.83	3.45
256-QAM	5255	6.15	6.07	9.12	16.83	7.71
	5300	10.35	10.38	13.38	16.83	3.46
	5342.5	10.33	10.41	13.38	16.84	3.46

Table 38: ISED 5.25-5.35 GHz: Output Power: 10 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5255	-7.92	-8.01	-4.95	2.83	7.78
	5300	-3.64	-3.85	-0.73	2.83	3.57
	5342.5	-3.89	-3.79	-0.83	2.83	3.66
256-QAM	5255	-7.92	-8.02	-4.96	2.83	7.79
	5300	-3.89	-3.82	-0.84	2.83	3.68
	5342.5	-3.83	-3.79	-0.80	2.84	3.64

Table 39: ISED 5.25-5.35 GHz: Output Power: 10 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5255	-14.92	-15.01	-11.95	-5.17	6.78
	5300	-8.48	-8.44	-5.45	-5.17	0.28
	5342.5	-8.49	-8.39	-5.43	-5.17	0.26
256-QAM	5255	-14.92	-14.99	-11.94	-5.17	6.78
	5300	-8.48	-8.46	-5.46	-5.17	0.29
	5342.5	-8.48	-8.37	-5.41	-5.16	0.25

Table 40: ISED 5.25-5.35 GHz: Output Power: 20 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5260	6.48	6.32	9.41	19.84	10.43
	5300	10.63	10.65	13.65	19.84	6.19
	5337.5	10.63	10.45	13.55	19.84	6.29
256-QAM	5260	6.44	6.33	9.40	19.84	10.45
	5300	10.65	10.61	13.64	19.84	6.20
	5337.5	10.61	10.55	13.59	19.84	6.25

Table 41: ISED 5.25-5.35 GHz: Output Power: 20 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5260	-7.63	-7.78	-4.69	5.84	10.54
	5300	-3.58	-3.64	-0.60	5.84	6.44
	5337.5	-3.59	-3.78	-0.67	5.84	6.51
256-QAM	5260	-7.64	-7.78	-4.70	5.84	10.54
	5300	-3.59	-3.59	-0.58	5.84	6.42
	5337.5	-3.61	-3.78	-0.68	5.84	6.53

Table 42: ISED 5.25-5.35 GHz: Output Power: 20 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5260	-14.62	-14.78	-11.69	-2.16	9.53
	5300	-5.30	-5.28	-2.28	-2.16	0.12
	5337.5	-5.33	-5.26	-2.28	-2.16	0.13
256-QAM	5260	-14.62	-14.77	-11.68	-2.16	9.53
	5300	-5.29	-5.28	-2.27	-2.16	0.12
	5337.5	-5.32	-5.25	-2.27	-2.16	0.12

Table 43: ISED 5.25-5.35 GHz: Output Power: 40 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5270	6.50	6.40	9.46	20.70	11.24
	5300	10.69	10.64	13.68	20.70	7.02
	5327.5	10.62	10.65	13.65	20.70	7.05
256-QAM	5270	6.51	6.40	9.47	20.70	11.23
	5300	10.71	10.63	13.68	20.70	7.02
	5327.5	10.72	10.64	13.69	20.70	7.01

Table 44: ISED 5.25-5.35 GHz: Output Power: 40 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5270	-7.59	-7.69	-4.63	6.70	11.33
	5300	-3.52	-3.59	-0.54	6.70	7.24
	5327.5	-3.53	-3.57	-0.54	6.70	7.24
256-QAM	5270	-7.58	-7.67	-4.61	6.70	11.31
	5300	-3.51	-3.62	-0.55	6.70	7.25
	5327.5	-3.53	-3.56	-0.53	6.70	7.23

Table 45: ISED 5.25-5.35 GHz: Output Power: 40 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5270	-14.58	-14.7	-11.63	-1.30	10.33
	5300	-5.02	-5.31	-2.15	-1.30	0.85
	5327.5	-5.31	-5.25	-2.27	-1.30	0.97
256-QAM	5270	-14.56	-14.68	-11.61	-1.30	10.31
	5300	-5.03	-5.28	-2.14	-1.30	0.84
	5327.5	-5.28	-5.26	-2.26	-1.30	0.96

5470-5725 MHz Band FCC Part 15 Subpart E and RSS-247 Issue 2

Table 46: FCC 5.47-5.725 GHz Output Power: 10 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5475	5.92	5.81	8.88	17.33	8.46
	5570	13.99	13.54	16.78	17.36	0.58
	5720	7.18	6.73	9.97	17.34	7.37
256-QAM	5475	5.93	5.83	8.89	17.44	8.55
	5570	14.01	13.51	16.78	17.33	0.55
	5720	7.18	6.74	9.98	17.33	7.35

Table 47: FCC 5.47-5.725 GHz Output Power: 10 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5475	-8.19	-8.29	-5.23	3.33	8.56
	5570	-0.38	-0.99	2.34	3.36	1.02
	5720	-6.84	-7.22	-4.02	3.34	7.36
256-QAM	5475	-8.18	-8.25	-5.20	3.44	8.65
	5570	-0.37	-0.98	2.35	3.33	0.98
	5720	-6.82	-7.29	-4.04	3.33	7.37

Table 48: FCC 5.47-5.725 GHz Output Power: 10 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5475	-16.09	-16.19	-13.13	-4.67	8.46
	5570	-8.41	-9.00	-5.68	-4.64	1.04
	5720	-14.81	-15.22	-12.00	-4.66	7.34
256-QAM	5475	-16.08	-16.19	-13.12	-4.56	8.56
	5570	-8.42	-9.01	-5.69	-4.67	1.02
	5720	-14.80	-15.26	-12.01	-4.67	7.34

Table 49: FCC 5.47-5.725 GHz Output Power: 20 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5480	8.18	8.13	11.17	20.32	9.16
	5570	16.38	15.81	19.11	20.32	1.21
	5715	9.42	8.96	12.21	20.33	8.12
256-QAM	5480	8.14	8.12	11.14	20.34	9.2
	5570	16.37	15.79	19.1	20.34	1.24
	5715	9.45	8.95	12.22	20.35	8.14

Table 50: FCC 5.47-5.725 GHz Output Power: 20 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5480	-4.98	-5.02	-1.99	6.32	8.31
	5570	2.79	2.31	5.57	6.32	0.76
	5715	-3.60	-4.26	-0.91	6.33	7.24
256-QAM	5480	-4.94	-5.02	-1.97	6.34	8.31
	5570	2.79	2.29	5.56	6.34	0.78
	5715	-3.62	-4.22	-0.90	6.35	7.25

Table 51: FCC 5.47-5.725 GHz Output Power: 20 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5480	-12.94	-13.02	-9.97	-1.68	8.29
	5570	-5.24	-5.70	-2.45	-1.68	0.78
	5715	-11.58	-12.21	-8.87	-1.67	7.20
256-QAM	5480	-12.92	-13.02	-9.96	-1.66	8.30
	5570	-5.24	-5.72	-2.46	-1.66	0.80
	5715	-11.59	-12.19	-8.87	-1.65	7.22

Table 52: FCC 5.47-5.725 GHz Output Power: 40 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5490	10.45	10.28	13.38	20.70	7.32
	5570	17.58	16.99	20.31	20.70	0.39
	5705	11.61	11.13	14.39	20.70	6.31
256-QAM	5490	10.48	10.26	13.38	20.70	7.32
	5570	17.58	16.96	20.29	20.70	0.41
	5705	11.55	11.12	14.35	20.70	6.35

Table 53: FCC 5.47-5.725 GHz Output Power: 40 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5490	-3.83	-4.03	-0.92	6.70	7.62
	5570	2.86	2.31	5.60	6.70	1.1
	5705	-2.69	-3.22	0.06	6.70	6.64
256-QAM	5490	-3.81	-4.01	-0.90	6.70	7.6
	5570	2.82	2.30	5.58	6.70	1.12
	5705	-2.68	-3.23	0.06	6.70	6.64

Table 54: FCC 5.47-5.725 GHz Output Power: 40 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5490	-11.88	-12.03	-8.94	-1.30	7.64
	5570	-5.19	-5.71	-2.43	-1.30	1.13
	5705	-10.68	-11.20	-7.92	-1.30	6.62
256-QAM	5490	-11.88	-12.01	-8.93	-1.30	7.63
	5570	-5.21	-5.70	-2.44	-1.30	1.14
	5705	-10.68	-11.19	-7.92	-1.30	6.62

Table 55: ISED 5.47-5.725 GHz Output Power: 10 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5475	5.92	5.81	8.88	16.83	7.96
	5570	13.99	13.54	16.78	16.83	0.05
	5720	7.18	6.73	9.97	16.83	6.86
256-QAM	5475	5.93	5.83	8.89	16.83	7.94
	5570	14.01	13.51	16.78	16.83	0.06
	5720	7.18	6.74	9.98	16.83	6.86

Table 56: ISED 5.47-5.725 GHz Output Power: 10 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5475	-8.19	-8.29	-5.23	2.83	8.06
	5570	-0.38	-0.99	2.34	2.83	0.5
	5720	-6.84	-7.22	-4.02	2.83	6.85
256-QAM	5475	-8.18	-8.25	-5.2	2.83	8.04
	5570	-0.37	-0.98	2.35	2.83	0.49
	5720	-6.82	-7.29	-4.04	2.83	6.87

Table 57: ISED 5.47-5.725 GHz Output Power: 10 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5475	-16.09	-16.19	-13.13	-5.17	7.96
	5570	-8.41	-9	-5.68	-5.17	0.52
	5720	-14.81	-15.22	-12	-5.17	6.83
256-QAM	5475	-16.08	-16.19	-13.12	-5.17	7.96
	5570	-8.42	-9.01	-5.69	-5.17	0.53
	5720	-14.8	-15.26	-12.01	-5.17	6.85

Table 58: ISED 5.47-5.725 GHz Output Power: 20 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5480	8.18	8.13	11.17	19.84	8.68
	5570	16.38	15.81	19.11	19.84	0.73
	5715	9.42	8.96	12.21	19.84	7.64
256-QAM	5480	8.14	8.12	11.14	19.84	8.7
	5570	16.37	15.79	19.1	19.84	0.74
	5715	9.45	8.95	12.22	19.84	7.63

Table 59: ISED 5.47-5.725 GHz Output Power: 20 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5480	-4.98	-5.02	-1.99	5.84	7.83
	5570	2.79	2.31	5.57	5.84	0.27
	5715	-3.6	-4.26	-0.91	5.84	6.75
256-QAM	5480	-4.94	-5.02	-1.97	5.84	7.81
	5570	2.79	2.29	5.56	5.84	0.29
	5715	-3.62	-4.22	-0.9	5.84	6.74

Table 60: ISED 5.47-5.725 GHz Output Power: 20 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5480	-12.94	-13.02	-9.97	-2.16	7.81
	5570	-5.24	-5.7	-2.45	-2.16	0.29
	5715	-11.58	-12.21	-8.87	-2.16	6.72
256-QAM	5480	-12.92	-13.02	-9.96	-2.16	7.8
	5570	-5.24	-5.72	-2.46	-2.16	0.31
	5715	-11.59	-12.19	-8.87	-2.16	6.71

Table 61: ISED 5.47-5.725 GHz Output Power: 40 MHz Channel, 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5490	10.45	10.28	13.38	20.7	7.32
	5570	17.58	16.99	20.31	20.7	0.39
	5705	11.61	11.13	14.39	20.7	6.31
256-QAM	5490	10.48	10.26	13.38	20.7	7.32
	5570	17.58	16.96	20.29	20.7	0.41
	5705	11.55	11.12	14.35	20.7	6.35

Table 62: ISED 5.47-5.725 GHz Output Power: 40 MHz Channel, 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5490	-3.83	-4.03	-0.92	6.7	7.62
	5570	2.86	2.31	5.6	6.7	1.1
	5705	-2.69	-3.22	0.06	6.7	6.64
256-QAM	5490	-3.81	-4.01	-0.9	6.7	7.6
	5570	2.82	2.3	5.58	6.7	1.12
	5705	-2.68	-3.23	0.06	6.7	6.64

Table 63: ISED 5.47-5.725 GHz Output Power: 40 MHz Channel, 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5490	-3.81	-4.01	-0.9	6.7	7.6
	5570	2.82	2.3	5.58	6.7	1.12
	5705	-2.68	-3.23	0.06	6.7	6.64
256-QAM	5490	-11.88	-12.01	-8.93	-1.3	7.63
	5570	-5.21	-5.7	-2.44	-1.3	1.14
	5705	-10.68	-11.19	-7.92	-1.3	6.62

5725-5850 MHz: FCC Part 15 Subpart E and RSS-247 Issue 1 & 2

Table 64: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	21.81	21.40	24.62	26.70	2.08	33.92	36.00	2.08
256-QAM	5790.0	21.92	21.48	24.72	26.70	1.98	34.02	36.00	1.98

Table 65: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	9.68	9.17	12.44	12.70	0.26	35.74	36.00	0.26
256-QAM	5790.0	9.83	9.28	12.57	12.70	0.13	35.87	36.00	0.13

Table 66: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	0.65	1.12	3.90	4.70	0.80	35.90	36.00	0.80
256-QAM	5790.0	0.61	1.19	3.92	4.70	0.78	35.92	36.00	0.78

Table 67: FCC 5.8 GHz: Output Power: 5 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	21.73	21.37	24.56	26.70	2.14	33.86	36.00	2.14
256-QAM	5790.0	21.97	21.27	24.64	26.70	2.06	33.94	36.00	2.06

Table 68: FCC 5.8 GHz: Output Power: 5 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	9.69	9.15	12.44	12.70	0.26	35.74	36.00	0.26
256-QAM	5790.0	9.73	9.01	12.40	12.70	0.30	35.70	36.00	0.30

Table 69: FCC 5.8 GHz: Output Power: 5 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	0.75	0.95	3.86	4.70	0.84	35.86	36.00	0.84
256-QAM	5790.0	0.76	1.03	3.91	4.70	0.79	35.91	36.00	0.79

Table 70: FCC 5.8 GHz: Output Power: 10 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	22.38	22.27	25.34	26.70	1.36
	5790.0	22.30	22.44	25.38	26.70	1.32
	5845.0	21.97	22.21	25.10	26.70	1.60
256-QAM	5730.0	22.27	22.24	25.27	26.70	1.43
	5790.0	22.37	22.40	25.40	26.70	1.30
	5845.0	22.07	22.26	25.18	26.70	1.52

Table 71: FCC 5.8 GHz: Output Power: 10 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	8.82	8.75	11.80	12.70	0.90
	5790.0	8.10	9.14	11.66	12.70	1.04
	5845.0	8.57	9.04	11.82	12.70	0.88
256-QAM	5730.0	9.09	8.83	11.97	12.70	0.73
	5790.0	8.06	9.21	11.68	12.70	1.02
	5845.0	8.71	9.01	11.87	12.70	0.83

Table 72: FCC 5.8 GHz: Output Power: 10 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	0.67	0.72	3.71	4.70	0.99
	5790.0	1.13	1.03	4.09	4.70	0.61
	5845.0	0.31	1.00	3.68	4.70	1.02
256-QAM	5730.0	0.82	0.61	3.73	4.70	0.97
	5790.0	1.08	1.00	4.05	4.70	0.65
	5845.0	0.25	1.04	3.67	4.70	1.03

Table 73: FCC 5.8 GHz: Output Power: 20 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	22.49	22.37	25.44	26.70	1.26
	5790.0	22.64	22.47	25.57	26.70	1.13
	5840.0	22.29	22.34	25.33	26.70	1.37
256-QAM	5735.0	22.63	22.34	25.50	26.70	1.20
	5790.0	22.57	22.50	25.55	26.70	1.15
	5840.0	22.26	22.36	25.32	26.70	1.38

Table 74: FCC 5.8 GHz: Output Power: 20 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	8.27	9.02	11.67	12.70	1.03
	5790.0	9.36	8.40	11.92	12.70	0.78
	5840.0	9.02	8.23	11.65	12.70	1.05
256-QAM	5735.0	8.10	9.03	11.60	12.70	1.10
	5790.0	9.25	8.41	11.86	12.70	0.84
	5840.0	8.91	9.06	12.00	12.70	0.70

Table 75: FCC 5.8 GHz: Output Power: 20 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	1.06	0.79	3.94	4.70	0.76
	5790.0	1.35	1.26	4.32	4.70	0.38
	5840.0	0.68	0.87	3.79	4.70	0.91
256-QAM	5735.0	0.93	0.79	3.87	4.70	0.83
	5790.0	1.40	1.23	4.33	4.70	0.37
	5840.0	0.64	0.91	3.79	4.70	0.91

Table 76: FCC 5.8 GHz: Output Power: 40 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	22.61	22.49	25.56	26.70	1.14
	5790.0	22.63	22.70	25.68	26.70	1.02
	5830.0	22.47	22.45	25.47	26.70	1.23
256-QAM	5745.0	22.70	22.50	25.61	26.70	1.09
	5790.0	22.64	22.74	25.70	26.70	1.00
	5830.0	22.44	22.49	25.48	26.70	1.22

Table 77: FCC 5.8 GHz: Output Power: 40 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	9.07	8.80	11.95	12.70	0.75
	5790.0	8.30	9.40	11.90	12.70	0.80
	5830.0	8.98	8.28	11.65	12.70	1.05
256-QAM	5745.0	9.15	8.77	11.97	12.70	0.73
	5790.0	8.24	9.36	11.85	12.70	0.85
	5830.0	9.00	8.06	11.57	12.70	1.13

Table 78: FCC 5.8 GHz: Output Power: 40 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	0.78	0.60	3.70	4.70	1.00
	5790.0	1.07	1.17	4.13	4.70	0.57
	5830.0	0.78	0.90	3.85	4.70	0.85
256-QAM	5745.0	0.83	0.57	3.71	4.70	0.99
	5790.0	1.11	1.20	4.17	4.70	0.53
	5830.0	0.75	0.91	3.84	4.70	0.86

Table 79: FCC 5.8 GHz: Output Power: 45 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	21.73	21.53	24.64	26.70	2.06	33.94	36.00	2.06
256-QAM	5790.0	21.94	21.17	24.58	26.70	2.12	33.88	36.00	2.12

Table 80: FCC 5.8 GHz: Output Power: 45 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBM)	EIRP Margin (dBM)
BPSK	5790.0	9.59	8.91	12.27	12.70	0.43	35.57	36.00	0.43
256-QAM	5790.0	9.18	9.16	12.18	12.70	0.52	35.48	36.00	0.52

Table 81: FCC 5.8 GHz: Output Power: 45 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBM)	EIRP Margin (dBM)
BPSK	5790.0	0.52	0.99	3.77	4.70	0.93	35.77	36.00	0.93
256-QAM	5790.0	0.45	0.93	3.71	4.70	0.99	35.71	36.00	0.99

Table 82: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	21.81	21.40	24.62	26.70	2.08	33.92	36.00	2.08
256-QAM	5790.0	21.92	21.48	24.72	26.70	1.98	34.02	36.00	1.98

Table 83: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	9.68	9.17	12.44	12.70	0.26	35.74	36.00	0.26
256-QAM	5790.0	9.83	9.28	12.57	12.70	0.13	35.87	36.00	0.13

Table 84: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	0.65	1.12	3.90	4.70	0.80	35.90	36.00	0.80
256-QAM	5790.0	0.61	1.19	3.92	4.70	0.78	35.92	36.00	0.78

Table 85: ISED 5.8 GHz: Output Power: 5 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	21.73	21.37	24.56	26.70	2.14	33.86	36.00	2.14
256-QAM	5790.0	21.97	21.27	24.64	26.70	2.06	33.94	36.00	2.06

Table 86: ISED 5.8 GHz: Output Power: 5 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	9.69	9.15	12.44	12.70	0.26	35.74	36.00	0.26
256-QAM	5790.0	9.73	9.01	12.40	12.70	0.30	35.70	36.00	0.30

Table 87: ISED 5.8 GHz: Output Power: 5 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBm)
BPSK	5790.0	0.75	0.95	3.86	4.70	0.84	35.86	36.00	0.84
256-QAM	5790.0	0.76	1.03	3.91	4.70	0.79	35.91	36.00	0.79

Table 88: ISED 5.8 GHz: Output Power: 10 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	16.72	15.30	19.08	26.70	7.62
	5790.0	22.30	22.44	25.38	26.70	1.32
	5845.0	16.19	15.80	19.01	26.70	7.69
256-QAM	5730.0	16.73	15.29	19.08	26.70	7.62
	5790.0	22.37	22.40	25.40	26.70	1.30
	5845.0	16.14	15.81	18.99	26.70	7.71

Table 89: ISED 5.8 GHz: Output Power: 10 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	2.31	1.77	5.06	12.70	7.64
	5790.0	8.10	9.14	11.66	12.70	1.04
	5845.0	1.94	2.28	5.12	12.70	7.58
256-QAM	5730.0	2.29	1.76	5.04	12.70	7.66
	5790.0	8.06	9.21	11.68	12.70	1.02
	5845.0	1.91	2.27	5.10	12.70	7.60

Table 90: ISED 5.8 GHz: Output Power: 10 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	-6.15	-6.66	-3.39	4.70	8.09
	5790.0	1.13	1.03	4.09	4.70	0.61
	5845.0	-6.59	-6.04	-3.30	4.70	8.00
256-QAM	5730.0	-6.38	-6.63	-3.49	4.70	8.19
	5790.0	1.08	1.00	4.05	4.70	0.65
	5845.0	-6.57	-6.37	-3.46	4.70	8.16

Table 91: ISED 5.8 GHz: Output Power: 20 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	17.06	16.82	19.95	26.70	6.75
	5790.0	22.64	22.47	25.57	26.70	1.13
	5840.0	16.61	16.87	19.75	26.70	6.95
256-QAM	5735.0	17.02	16.75	19.90	26.70	6.80
	5790.0	22.57	22.50	25.55	26.70	1.15
	5840.0	16.66	16.89	19.79	26.70	6.91

Table 92: ISED 5.8 GHz: Output Power: 20 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	3.80	3.22	6.53	12.70	6.17
	5790.0	9.36	8.40	11.92	12.70	0.78
	5840.0	3.14	3.31	6.24	12.70	6.46
256-QAM	5735.0	3.78	3.18	6.50	12.70	6.20
	5790.0	9.25	8.41	11.86	12.70	0.84
	5840.0	3.11	3.30	6.22	12.70	6.48

Table 93: ISED 5.8 GHz: Output Power: 20 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	-5.01	-5.26	-2.12	4.70	6.82
	5790.0	1.35	1.26	4.32	4.70	0.38
	5840.0	-5.37	-4.80	-2.07	4.70	6.77
256-QAM	5735.0	-5.01	-5.17	-2.08	4.70	6.78
	5790.0	1.40	1.23	4.33	4.70	0.37
	5840.0	-5.32	-4.75	-2.02	4.70	6.72

Table 94: ISED 5.8 GHz: Output Power: 40 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	17.14	16.96	20.06	26.70	6.64
	5790.0	22.63	22.70	25.68	26.70	1.02
	5830.0	16.75	17.04	19.91	26.70	6.79
256-QAM	5745.0	17.13	16.97	20.06	26.70	6.64
	5790.0	22.64	22.74	25.70	26.70	1.00
	5830.0	16.80	17.07	19.95	26.70	6.75

Table 95: ISED 5.8 GHz: Output Power: 40 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	4.54	3.41	7.02	12.70	5.68
	5790.0	8.30	9.40	11.90	12.70	0.80
	5830.0	4.23	3.46	6.87	12.70	5.83
256-QAM	5745.0	4.48	3.41	6.99	12.70	5.71
	5790.0	8.24	9.36	11.85	12.70	0.85
	5830.0	4.24	3.44	6.87	12.70	5.83

Table 96: ISED 5.8 GHz: Output Power: 40 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	-3.66	-3.86	-0.75	4.70	5.45
	5790.0	1.07	1.17	4.13	4.70	0.57
	5830.0	-3.78	-3.59	-0.67	4.70	5.37
256-QAM	5745.0	-3.66	-3.77	-0.70	4.70	5.40
	5790.0	1.11	1.20	4.17	4.70	0.53
	5830.0	-3.76	-3.86	-0.80	4.70	5.50

Table 97: ISED 5.8 GHz: Output Power: 45 MHz Channel, PMP 10 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBm)	EIRP Margin (dBM)
BPSK	5790.0	21.73	21.53	24.64	26.70	2.06	33.94	36.00	2.06
256-QAM	5790.0	21.94	21.17	24.58	26.70	2.12	33.88	36.00	2.12

Table 98: ISED 5.8 GHz: Output Power: 45 MHz Channel, PMP 24 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBM)	EIRP Margin (dBM)
BPSK	5790.0	9.59	8.91	12.27	12.70	0.43	35.57	36.00	0.43
256-QAM	5790.0	9.18	9.16	12.18	12.70	0.52	35.48	36.00	0.52

Table 99: ISED 5.8 GHz: Output Power: 45 MHz Channel, PMP 32 dBi Antenna

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)	EIRP (dBm)	EIRP Liimit (dBM)	EIRP Margin (dBM)
BPSK	5790.0	0.52	0.99	3.77	4.70	0.93	35.77	36.00	0.93
256-QAM	5790.0	0.45	0.93	3.71	4.70	0.99	35.71	36.00	0.99

Table 100: FCC 5.8 GHz: Output Power: 0.875 MHz Channel, PTP Application

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5790.0	21.81	21.40	24.62	26.70	2.08
256-QAM	5790.0	21.92	21.48	24.72	26.70	1.98

Table 101: FCC 5.8 GHz: Output Power: 5 MHz Channel, PTP Application

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5790.0	21.73	21.37	24.56	26.70	2.14
256-QAM	5790.0	21.97	21.27	24.64	26.70	2.06

Table 102: FCC 5.8 GHz: Output Power: 10 MHz Channel, PTP 10 & 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	22.38	22.27	25.34	30.00	4.66
	5790.0	22.30	22.44	25.38	30.00	4.62
	5845.0	21.97	22.21	25.10	30.00	4.90
256-QAM	5730.0	22.27	22.24	25.27	30.00	4.73
	5790.0	22.37	22.40	25.40	30.00	4.60
	5845.0	22.07	22.26	25.18	30.00	4.82

Table 103: FCC 5.8 GHz: Output Power: 10 MHz Channel, PTP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	19.53	19.44	22.50	30.00	7.50
	5790.0	21.60	21.57	24.60	30.00	5.40
	5845.0	18.34	18.48	21.42	30.00	8.58
256-QAM	5730.0	19.67	19.52	22.61	30.00	7.39
	5790.0	21.65	21.53	24.60	30.00	5.40
	5845.0	18.26	18.47	21.38	30.00	8.62

Table 104: FCC 5.8 GHz: Output Power: 20 MHz Channel, PTP 10 & 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	22.49	22.37	25.44	30.00	4.56
	5790.0	22.64	22.47	25.57	30.00	4.43
	5840.0	22.29	22.34	25.33	30.00	4.67
256-QAM	5735.0	22.63	22.34	25.50	30.00	4.50
	5790.0	22.57	22.50	25.55	30.00	4.45
	5840.0	22.26	22.36	25.32	30.00	4.68

Table 105: FCC 5.8 GHz: Output Power: 20 MHz Channel, PTP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	18.07	17.95	21.02	30.00	8.98
	5790.0	20.99	21.17	24.09	30.00	5.91
	5840.0	17.47	18.34	20.94	30.00	9.06
256-QAM	5735.0	18.11	19.92	22.12	30.00	7.88
	5790.0	20.91	21.26	24.10	30.00	5.90
	5840.0	17.74	18.32	21.05	30.00	8.95

Table 106: FCC 5.8 GHz: Output Power: 40 MHz Channel, PTP 10 & 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	22.61	22.49	25.56	30.00	4.44
	5790.0	22.63	22.70	25.68	30.00	4.32
	5830.0	22.47	22.45	25.47	30.00	4.53
256-QAM	5745.0	22.70	22.50	25.61	30.00	4.39
	5790.0	22.64	22.74	25.70	30.00	4.30
	5830.0	22.44	22.49	25.48	30.00	4.52

Table 107: FCC 5.8 GHz: Output Power: 40 MHz Channel, PTP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	15.95	15.81	18.89	30.00	11.11
	5790.0	21.90	21.84	24.88	30.00	5.12
	5830.0	15.79	16.01	18.91	30.00	11.09
256-QAM	5745.0	15.90	15.84	18.88	30.00	11.12
	5790.0	21.63	21.80	24.73	30.00	5.27
	5830.0	15.74	16.11	18.94	30.00	11.06

Table 108: FCC 5.8 GHz: Output Power: 45 MHz Channel, PTP Application

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5790.0	21.73	21.53	24.64	26.70	2.06
256-QAM	5790.0	21.94	21.17	24.58	26.70	2.12

Table 109: ISED 5.8 GHz: Output Power: 0.875 MHz Channel, PTP Application

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5790.0	21.81	21.40	24.62	26.70	2.08
256-QAM	5790.0	21.92	21.48	24.72	26.70	1.98

Table 110: ISED 5.8 GHz: Output Power: 5 MHz Channel, PTP Application

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5790.0	21.73	21.37	24.56	26.70	2.14
256-QAM	5790.0	21.97	21.27	24.64	26.70	2.06

Table 111: ISED 5.8 GHz: Output Power: 10 MHz Channel, PTP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	16.72	15.30	19.08	30.00	10.92
	5790.0	22.30	22.44	25.38	30.00	4.62
	5845.0	16.19	15.80	19.01	30.00	10.99
256-QAM	5730.0	16.73	15.29	19.08	30.00	10.92
	5790.0	22.37	22.40	25.40	30.00	4.60
	5845.0	16.14	15.81	18.99	30.00	11.01

Table 112: ISED 5.8 GHz: Output Power: 10 MHz Channel, PTP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	2.31	1.77	5.06	30.00	24.94
	5790.0	22.30	22.44	25.38	30.00	4.62
	5845.0	1.94	2.28	5.12	30.00	24.88
256-QAM	5730.0	2.29	1.76	5.04	30.00	24.96
	5790.0	22.37	22.40	25.40	30.00	4.60
	5845.0	1.91	2.27	5.10	30.00	24.90

Table 113: ISED 5.8 GHz: Output Power: 10 MHz Channel, PTP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5730.0	-6.15	-6.66	-3.39	30.00	33.39
	5790.0	21.60	21.57	24.60	30.00	5.40
	5845.0	-6.59	-6.04	-3.30	30.00	33.30
256-QAM	5730.0	-6.38	-6.63	-3.49	30.00	33.49
	5790.0	21.65	21.53	24.60	30.00	5.40
	5845.0	-6.57	-6.37	-3.46	30.00	33.46

Table 114: ISED 5.8 GHz: Output Power: 20 MHz Channel, PTP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	17.06	16.82	19.95	30.00	10.05
	5790.0	22.64	22.47	25.57	30.00	4.43
	5840.0	16.61	16.87	19.75	30.00	10.25
256-QAM	5735.0	17.02	16.75	19.90	30.00	10.10
	5790.0	22.57	22.50	25.55	30.00	4.45
	5840.0	16.66	16.89	19.79	30.00	10.21

Table 115: ISED 5.8 GHz: Output Power: 20 MHz Channel, PTP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	3.80	3.22	6.53	30.00	23.47
	5790.0	22.64	22.47	25.57	30.00	4.43
	5840.0	3.14	3.31	6.24	30.00	23.76
256-QAM	5735.0	3.78	3.18	6.50	30.00	23.50
	5790.0	22.57	22.50	25.55	30.00	4.45
	5840.0	3.11	3.30	6.22	30.00	23.78

Table 116: ISED 5.8 GHz: Output Power: 20 MHz Channel, PTP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5735.0	-5.01	-5.26	-2.12	30.00	32.12
	5790.0	20.99	21.17	24.09	30.00	5.91
	5840.0	-5.37	-4.80	-2.07	30.00	32.07
256-QAM	5735.0	-5.01	-5.17	-2.08	30.00	32.08
	5790.0	20.91	21.26	24.10	30.00	5.90
	5840.0	-5.32	-4.75	-2.02	30.00	32.02

Table 117: ISED 5.8 GHz: Output Power: 40 MHz Channel, PTP 10 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	17.14	16.96	20.06	30.00	9.94
	5790.0	22.63	22.70	25.68	30.00	4.32
	5830.0	16.75	17.04	19.91	30.00	10.09
256-QAM	5745.0	17.13	16.97	20.06	30.00	9.94
	5790.0	22.64	22.74	25.70	30.00	4.30
	5830.0	16.80	17.07	19.95	30.00	10.05

Table 118: ISED 5.8 GHz: Output Power: 40 MHz Channel, PTP 24 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	4.54	3.41	7.02	30.00	22.98
	5790.0	22.63	22.70	25.68	30.00	4.32
	5830.0	4.23	3.46	6.87	30.00	23.13
256-QAM	5745.0	4.48	3.41	6.99	30.00	23.01
	5790.0	22.64	22.74	25.70	30.00	4.30
	5830.0	4.24	3.44	6.87	30.00	23.13

Table 119: ISED 5.8 GHz: Output Power: 40 MHz Channel, PTP 32 dBi Antenna

Modulation	Frequency, MHz	Power at RF-1 (dBm)	Power at RF-2 (dBm)	Combined output power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5745.0	-3.66	-3.86	-0.75	30.00	30.75
	5790.0	21.90	21.84	24.88	30.00	5.12
	5830.0	-3.78	-3.59	-0.67	30.00	30.67
256-QAM	5745.0	-3.66	-3.77	-0.70	30.00	30.70
	5790.0	21.63	21.80	24.73	30.00	5.27
	5830.0	-3.76	-3.86	-0.80	30.00	30.80

Table 120: ISED 5.8 GHz: Output Power: 45 MHz Channel, PTP Application

Modulation	Frequency (MHz)	Power on ch0 (dBm)	Power on ch1 (dBm)	Combined Output Power (dBm)	Output power limit (dBm)	Output Power Margin (dB)
BPSK	5790.0	21.73	21.53	24.64	26.70	2.06
256-QAM	5790.0	21.94	21.17	24.58	26.70	2.12

5 Regulatory Notices

5.1.1 FCC Notices

Deployment in USA

The following notices about deployment in the USA are included in training and documentation provided to professional installers and operators of the final product:

1. The final product must be professionally installed.
2. WARNING -- FCC RF Exposure Warnings

To satisfy FCC RF exposure requirements for RF transmitting devices, the following distances should be maintained between the antenna of this device and persons during device operation:

Table 121: FCC: RDL-3100-RMA Recommended Safe Distances

Frequency (MHz)	Deployment	Separation Distance
4900	PMP/PTP	220 cm (86.6") or more
5200	PMP	75 cm (29.5") or more
5300	PMP/PTP	20 cm (7.8") or more
5400	PMP/PTP	20 cm (7.8") or more
5800	PMP	20 cm (7.8") or more
5800	PTP	220 cm (86.6") or more

To ensure compliance, operation at closer than these distances is not recommended. The antenna used for this transmitter must not be collocated in conjunction with any other antenna or transmitter.

3. FCC Information to Users @ FCC 15.105:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Where DFS is required by regional regulations, this function is permanently enabled at the factory and cannot be disabled by the installer or end-user.

4. FCC Information to Users @ FCC 15.19:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

5. FCC Information to Users @ FCC 15.21:

Warning: Changes or modifications not expressly approved by Redline Communications could void the user's authority to operate the equipment.

5.1.2 ISED Notices

Deployment in Canada

This Class B Digital apparatus meets all the requirements of the Canadian Interference-Causing Equipment.

The following notices about deployment in Canada are included in training and documentation provided to professional installers and operators of the final product:

1. The final product must be professionally installed.
2. WARNING -- ISED RF Exposure Warnings

To satisfy ISED RF exposure requirements for RF transmitting devices, the following distances should be maintained between the antenna of this device and persons during device operation:

Table 122: ISED: RDL-3100-RMA Recommended Safe Distances

Frequency (MHz)	Deployment	Separation Distance
4900	PMP/PTP	220 cm (86.6") or more
5300	PMP/PTP	20 cm (7.8") or more
5400	PMP/PTP	20 cm (7.8") or more
5800	PMP	20 cm (7.8") or more
5800	PTP	220 cm (86.6") or more

To ensure compliance, operation at closer than these distances is not recommended. The antenna used for this transmitter must not be collocated in conjunction with any other antenna or transmitter.

The RDL-3100-RMA has been designed to operate with an antenna having a maximum gain of 32 dBi. Antenna having a higher gain is strictly prohibited per regulations of ISED. The required antenna impedance is 50 ohms.

This device has been designed to ensure that radio frequency emissions are maintained within the band of operation under all normal operating conditions listed in this manual.

This device complies with ISED license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropic radiated power (EIRP) is not more than that required for successful communication.

Déploiement aux le Canada

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Les avis suivants à propos du déploiement au Canada sont inclus dans la formation et la documentation fournies aux installateurs professionnels et les opérateurs du produit final:

1. Le produit final doit être installé par un professionnel.
2. AVERTISSEMENT - ISED avertissements d'exposition RF

Pour satisfaire les exigences d'ISED en ce qui a trait aux expositions aux RF pour RF dispositifs de transmission, les distances suivantes doit être maintenue entre l'antenne de ce dispositif et des personnes pendant le fonctionnement du dispositif:

Table 123: ISED: RDL-3100-RMA distances de sécurité recommandées

Frequency (MHz)	Deployment	Separation Distance
4900	PMP/PTP	220 cm (86.6") ou plus
5300	PMP/PTP	20 cm (7.8") ou plus
5400	PMP/PTP	20 cm (7.8") ou plus
5800	PMP	20 cm (7.8") ou plus
5800	PTP	220 cm (86.6") ou plus

maximal de 32 dBi. Antenne ayant un gain plus élevé est strictement interdite par les règlements d'Industrie Canada. L'impédance d'antenne requise est de 50 ohms.

Ce dispositif a été conçu pour veiller à ce que les émissions de radiofréquences sont maintenus dans la bande de fonctionnement dans toutes les conditions normales de fonctionnement figurant dans ce manuel.

Cet appareil est conforme la norme d'Industrie Canada exempts de licence RSS (s). Son fonctionnement est soumis aux deux conditions suivantes:

1. Cet appareil ne peut pas causer d'interférences, et
2. Cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil.

Pour réduire le potentiel d'interférence radio sur d'autres utilisateurs, le type d'antenne et son gain doivent être choisies tel que la Puissance Isotrope Rayonnée Equivalente (PIRE) ne dépasse pas le niveau nécessaire pour une communication efficace.

302 Town Centre • Markham, Ontario • Canada • L3R 0E8

www.rdlcom.com