


ATL-37B-Antenna Specification

1、Electrical performance


- 1.1) Type of Antenna: **FPC antenna**
- 1.2) Frequency range: 2400MHz ~ 2500MHz
- 1.3) Gain: 0.49dBi
- 1.4) Impedance: 50 ohm
- 1.5) VSWR: ≤ 2
- 1.6) Return Loss: ≤ -10 dB
- 1.7) Polarization: Linear
- 1.8) Radiation: Omni-directional
- 1.9) Model: ATL-37B
- 1.10) Manufacturer: Shenzhen Antexin Technology Co.,Ltd
- 1.11) Brand: Shenzhen Antexin Technology Co.,Ltd

2、Antenna graph

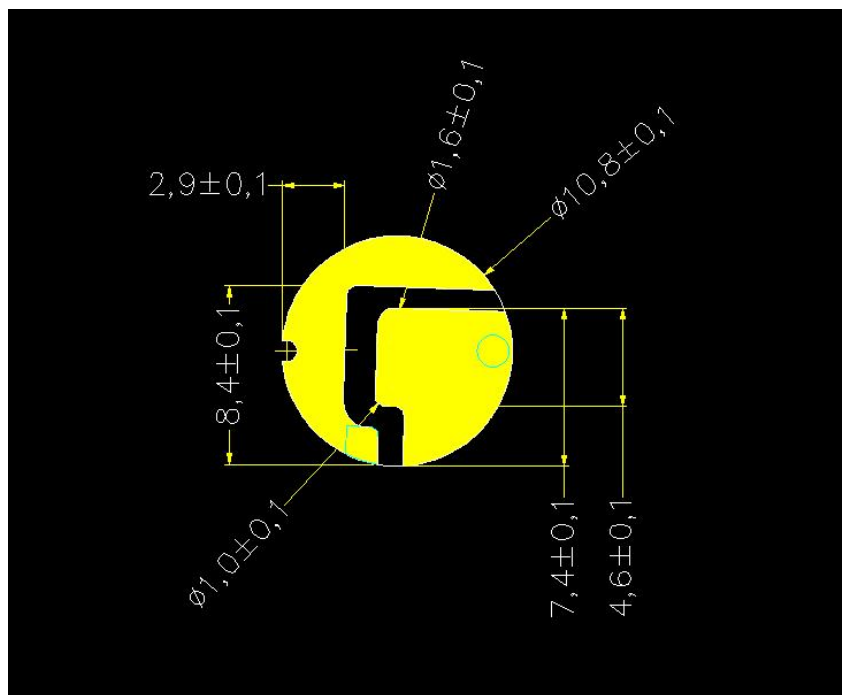


(a) On-board antenna

3、 Network analyzer graph

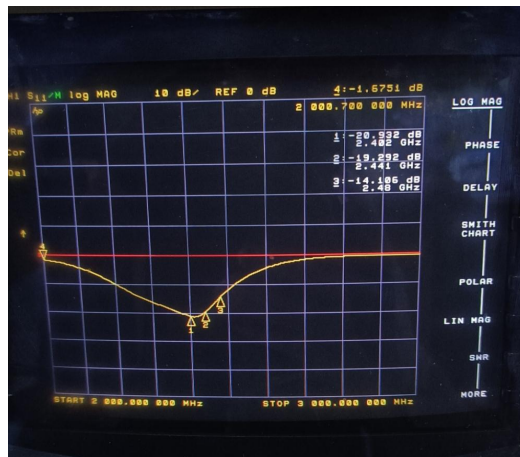

(b) Return Loss

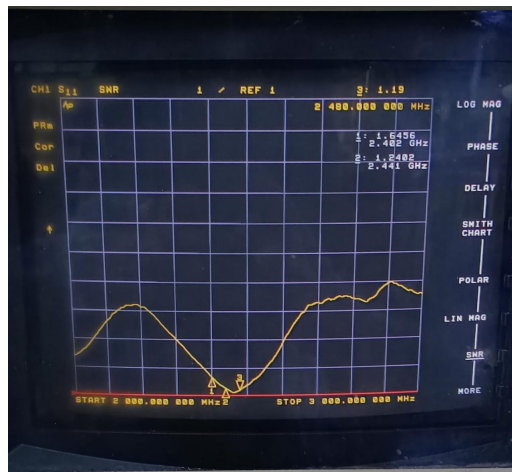

(c) VSWR




(d) Smith Cha

4、 Gain pattern


4.1) Gain chart

Freq (MHz)	Gain (dB)	Efficiency (dB)	Efficiency (%)
2400	-1.04	-5.09	25.52
2410	-0.55	-4.60	27.36
2420	-0.34	-4.37	28.34
2430	-0.26	-4.18	29.15
2440	-0.32	-4.11	30.47
2450	-0.49	-4.21	29.03
2460	-0.86	-4.49	27.82
2470	-1.15	-4.72	26.92
2480	-1.16	-4.97	25.97
2490	-1.16	-5.30	24.78
2500	-1.38	-5.70	23.47


4.2) 3D gain pattern

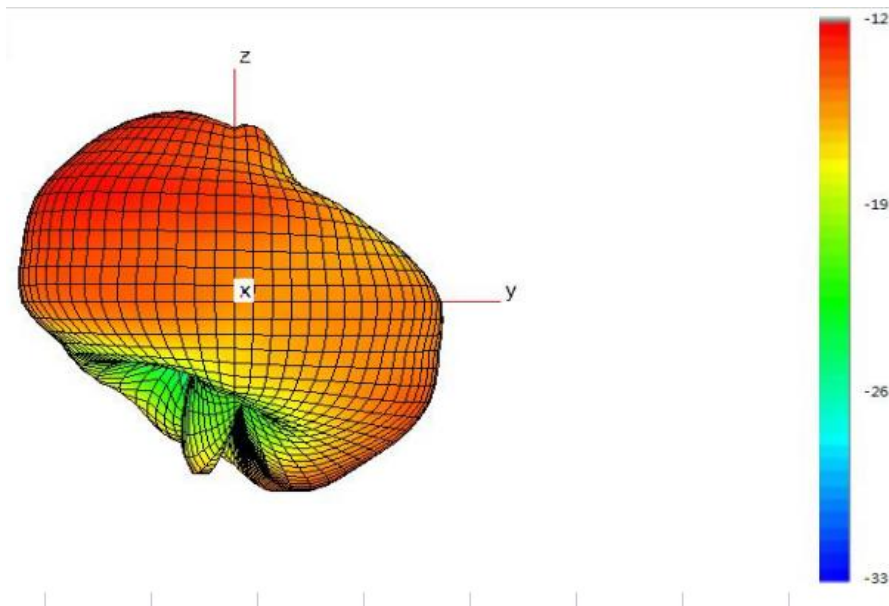

(e) 3D gain pattern, X+

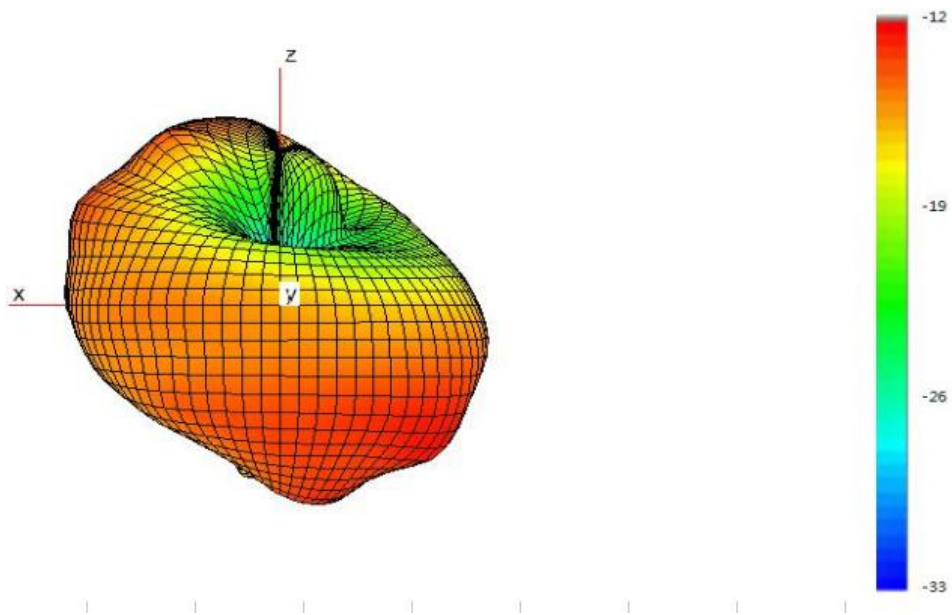


(f) 3D gain pattern, Y+

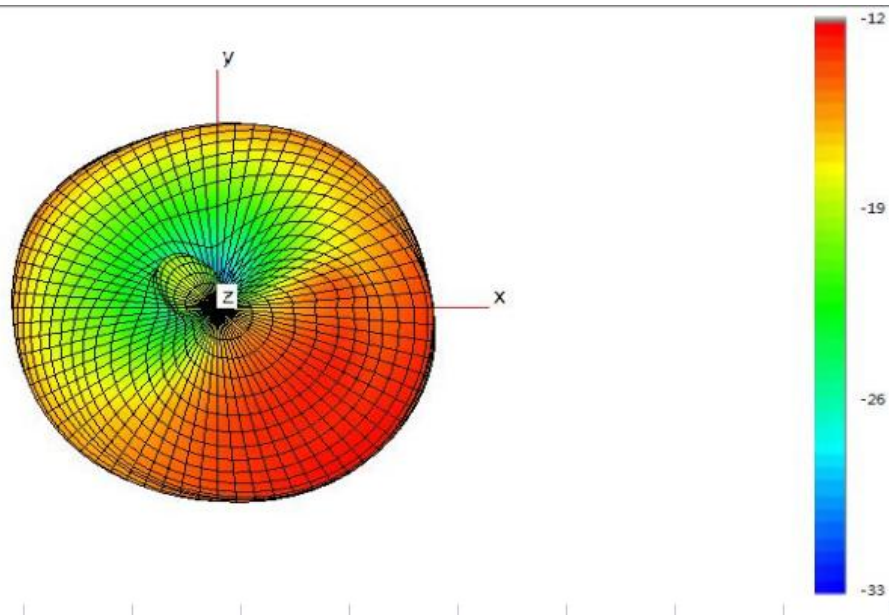


(g) 3D gain pattern, Z+


4.3) 2D gain pattern

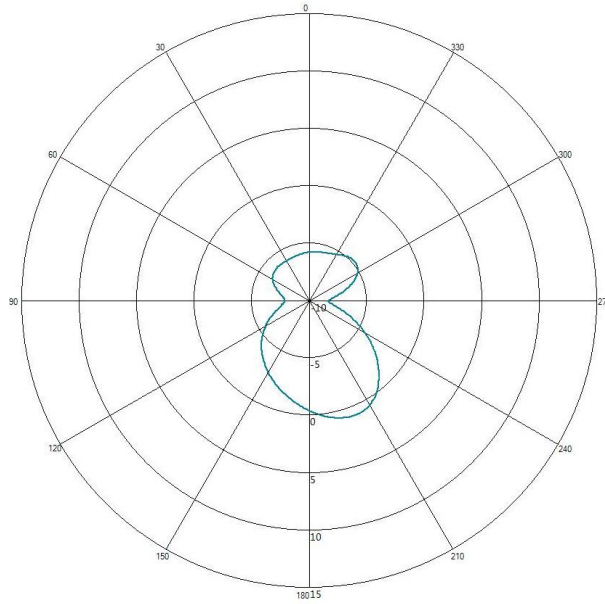

(f) On-board antenna (XY-Plane)

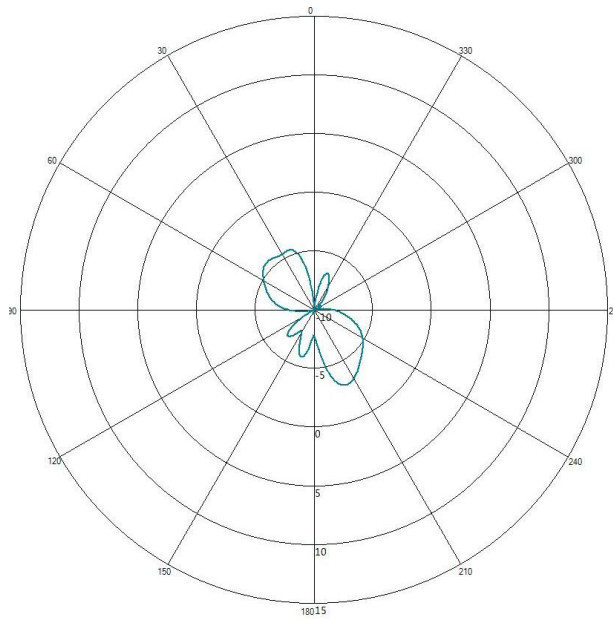

(g) On-board antenna , (ZY-Plane)

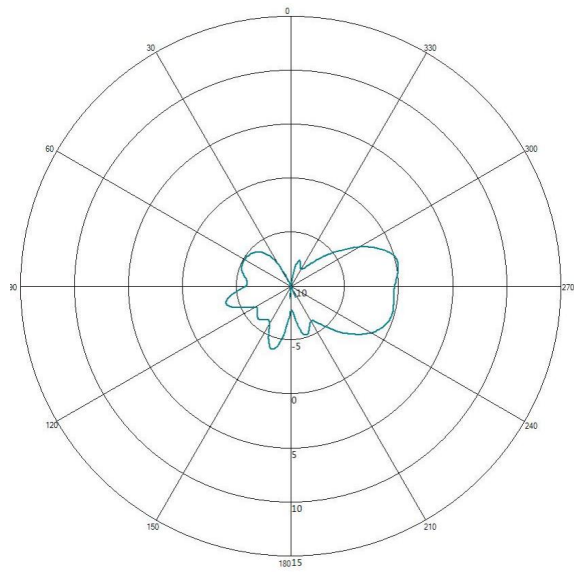

(h) On-board antenna , (ZX-Plane)