

CommScope Technologies, LLC

TEST REPORT

SCOPE OF WORK

EMISSIONS TESTING – RPM-A5A11-B05 W/ 5G NR waveform With OneCell® RP5200

REPORT NUMBER

104751739BOX-009

ISSUE DATE

10/12/2021

[REVISED DATE]

01/12/2022

02/02/2022

PAGES

366

DOCUMENT CONTROL NUMBER

Non-Specific Radio Report Shell Rev. December 201

© 2017 INTERTEK



EMISSIONS TEST REPORT

(FULL COMPLIANCE)

Report Number: 104751739BOX-009

Project Number: G104751739

Report Issue Date: 10/12/2021

Report Issue Date: 02/02/2022

Model(s) Tested: RPM-A5A11-B05 W/ 5G NR waveform
With OneCell® RP5200

Model(s) Partially Tested: None

Model(s) Not Tested but declared equivalent by the client: None

Standards: CFR47 FCC Part 22 (09/2021)

Tested by:

Intertek Testing Services NA, Inc.
70 Codman Hill Road
Boxborough, MA 01719
USA

Client:

CommScope Technologies LLC
900 Chelmsford St.
Lowell, MA 01851
USA

Report prepared by



Vathana Ven / EMC Engineering Supervisor

Report reviewed by



Kouma Sinn / EMC Engineering Supervisor

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Table of Contents

1	<i>Introduction and Conclusion</i>	4
2	<i>Test Summary</i>	4
3	<i>Client Information</i>	5
4	<i>Description of Equipment Under Test and Variant Models</i>	5
5	<i>System Setup and Method</i>	6
6	<i>Maximum Peak Output Power and Human RF exposure</i>	8
7	<i>Peak-to-Average Power Ratio (PAPR)</i>	63
8	<i>26 dB Bandwidth and Occupied Bandwidth</i>	117
9	<i>Band Edge Compliance</i>	220
10	<i>Frequency Stability</i>	257
11	<i>Transmitter spurious emissions</i>	286
12	<i>Revision History</i>	366

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	--
4	Description of Equipment Under Test and Variant Models	--
5	System Setup and Method	--
6	Maximum Peak Output Power and Human RF exposure CFR47 FCC Parts 2.1046, 22.913(a) and 22.379	Pass
7	Peak-to-Average Power Ratio (PAPR) CFR47 FCC Part 22	Pass
8	26 dB Bandwidth and Occupied Bandwidth CFR47 FCC Parts 2.1049 and 22.917(b)	Pass
9	Band Edge Compliance CFR47 FCC Parts 2.1051, 2.1053, and 24.917	Pass
10	Frequency Stability CFR47 FCC Parts 2.1055 and 22.355	Pass
11	Transmitter Spurious Emissions CFR47 FCC Parts 2.1051, 2.1053, 2.1057 and 22.917	Pass
12	Revision History	--

3 Client Information

This EUT was tested at the request of:

Client: CommScope Technologies LLC
900 Chelmsford St.
Lowell, MA 01851
USA

Contact: Mr. Kevin Craig
Telephone: (978) 250-2678
Fax: None
Email: kevin.craig@commscope.com

4 Description of Equipment Under Test and Variant Models

Manufacturer: CommScope Telecommunications (China) Ltd.
68 Su Hong Xi Lu, Suzhou Industrial Park.
Suzhou, Jiangsu, 215021, China

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Band 5 Radio Module With OneCell® RP5200 host	CommScope Technologies LLC	RPM-A5A11-B05	21268410114
OneCell® RP5200	CommScope Technologies LLC	RP-A52xxi	BOX2107211402-013 (Intertek Assigned)

Receive Date:	07/30/2021
Received Condition:	Good
Type:	Production

Description of Equipment Under Test (provided by client)

The Radio Module is band specific using the Analog devices RF Agile Transceiver IC, AD936x. The device combines an RF front end with a flexible mixed-signal baseband section and integrated frequency synthesizers providing a configurable digital interface to the processor. The Radio Module also contains a band specific front end, band specific antenna and required power rails. All power rails required are derived from the 12 VDC bus supplied by the Baseband card. The reference frequency for the radio IC is 38.4 MHz is derived from the from an OCXO which is disciplined from a 1588 reference clock.

The original LTE radio has included the 5G NR capabilities.

It supports bandwidths of 5, 10, 15, and 20 MHz with four modulations; TM1.1-QPSK, TM3.2-16QAM, TM3.1-64QAM, and TM3.1a-256QAM. The radio is fixed.

Description of Radio Host (provided by client)

The OneCell® RP5200 family is factory configurable with 2 – 4 Radios Modules mounted to a Baseband card. The same PCB's will be used in both indoor and outdoor version of the radio point. The device is fixed.

The baseband card is the host for the modular radios. It contains a two ethernet PHY's with one supporting 100M/1G/2.5G/5G/10G ethernet and the other supporting 100M/1G. The main processor is Zynq Ultrascale+ MPSoC with 2 GB DDR3 and 4 GB Flash memory. The baseband PCBA converts POE power to +12 VDC bus voltage require as input to the radio modules.

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
48 VDC	0.960 mA per pair max	DC	N/A

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	Pre-programmed to transmit at Low, Mid, and High channels at four different modulations, TM1.1-QPSK, TM3.2-16QAM, TM3.1-64QAM, and TM3.1a-256QAM.

Software used by the EUT:

No.	Descriptions of EUT Exercising
1	RP5200 Diagnostics Version 4.19.0

Radio/Receiver Characteristics	
Frequency Band(s)	869 - 894 MHz
Modulation Type(s)	TM1.1-QPSK, TM3.2-16QAM, TM3.1-64 QAM, TM3.1a-256QAM
Maximum Output Power (conducted)	20.14 dBm (Conducted)
Test Channels	Low, Middle, High Channels of 5 MHz, 10 MHz, 15 MHz, and 20 MHz Bandwidths, Single Channel operation only
Occupied Bandwidth	19.03 MHz (Worst-case)
MIMO Information (# of Transmit and Receive antenna ports)	2x2 MIMO using cross polarized antennas and uncorrelated data streams
Equipment Type	Module in a host
Antenna Type and Gain	Detachable Antenna: +4 dBi (as provided by the client. Intertek takes no responsibility for the accuracy of this information. Actual antenna gain will be determined at the time of licensing)

Variant Models:

The following variant models were not tested as part of this evaluation, but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the model(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

None

5 System Setup and Method

Cables					
ID	Description	Length (m)	Shielding	Ferrites	Termination
--	LAN (POE Power Cable)	2.58	Shielded	None	POE P/S
--	LAN (Communication)	9.00	Shielded	None	Laptop

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Laptop	Dell	LATITUDE	None
Power Device Analyzer	Sifos Technologies	PDA-604A	604A0033
OneCell® RP5200*	CommScope Technologies LLC	RP-A52xxi	None

*Radio host used for testing

5.1 Method:

Configuration as required by ANSI C63.26-2015, KDB 662911, and CFR47 FCC Part 22 (09/2021).

5.2 EUT Block Diagram:

Photographs are available in a separate exhibit

6 Maximum Peak Output Power and Human RF exposure

6.1 Method

Tests are performed in accordance with CFR47 FCC Parts 2.1046 and 22.913(a), KDB662911, and ANSI C63.26 Section 5.2.4.4.

TEST SITE: EMC Lab

The EMC Lab has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

6.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9KHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	10/27/2020	10/27/2021
DAV005'	Weather Station	Davis	6250	MS19121808 3	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None	--	--

6.3 Results:

The maximum conducted output power was measured to be 20.14 dBm, which is much less than the EIRP limit of 22.913(a)(1). The sample tested was found to Comply. Output power from the two antenna ports was not summed since the data streams are uncorrelated and the antennas are cross polarized.

Licensees in the Cellular Radiotelephone Service are subject to the effective radiated power (ERP) limits and other requirements in this Section. See also § 22.169.

(a) **Maximum ERP.** The ERP of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(1) Except as described in paragraphs (a)(2), (3), and (4) of this section, the ERP of base stations and repeaters must not exceed -

- (i) 500 watts per emission; or
- (ii) 400 watts/MHz (PSD) per sector.

(2) Except as described in paragraphs (a)(3) and (4) of this section, for systems operating in areas more than 72 kilometers (45 miles) from international borders that:

(i) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or

(ii) Extend coverage into Unserved Area on a secondary basis (see § 22.949), the ERP of base transmitters and repeaters must not exceed -

- (A) 1000 watts per emission; or
- (B) 800 watts/MHz (PSD) per sector.

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	871.5	ANT0	19.55
		ANT1	19.41
Mid	881	ANT0	19.98
		ANT1	19.67
High	891.5	ANT0	20.06
		ANT1	19.89

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	874	ANT0	20.05
		ANT1	20.01
Mid	881	ANT0	19.94
		ANT1	19.63
High	889	ANT0	19.87
		ANT1	19.62

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	876.5	ANT0	20.00
		ANT1	19.90
Mid	881	ANT0	19.82
		ANT1	19.57
High	886.5	ANT0	19.87
		ANT1	19.59

Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	879	ANT0	19.71
		ANT1	19.74
Mid	881	ANT0	19.79
		ANT1	19.51
High	884	ANT0	19.95
		ANT1	19.76

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	871.5	ANT0	19.85
		ANT1	19.71
Mid	881	ANT0	19.99
		ANT1	19.76
High	891.5	ANT0	20.13
		ANT1	19.92

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	874	ANT0	20.14
		ANT1	20.07
Mid	881	ANT0	20.00
		ANT1	19.73
High	889	ANT0	19.97
		ANT1	19.71

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	876.5	ANT0	19.98
		ANT1	19.85
Mid	881	ANT0	19.49
		ANT1	19.74
High	886.5	ANT0	19.81
		ANT1	19.53

Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	879	ANT0	19.25
		ANT1	19.21
Mid	881	ANT0	19.87
		ANT1	19.69
High	884	ANT0	20.11
		ANT1	19.84

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	871.5	ANT0	19.75
		ANT1	19.67
Mid	881	ANT0	19.98
		ANT1	19.68
High	891.5	ANT0	20.03
		ANT1	19.85

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	874	ANT0	20.01
		ANT1	19.97
Mid	881	ANT0	19.90
		ANT1	19.60
High	889	ANT0	19.84
		ANT1	19.59

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	876.5	ANT0	19.96
		ANT1	19.82
Mid	881	ANT0	19.79
		ANT1	19.54
High	886.5	ANT0	19.84
		ANT1	19.53

Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	879	ANT0	19.68
		ANT1	19.73
Mid	881	ANT0	19.74
		ANT1	19.47
High	884	ANT0	19.93
		ANT1	19.74

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	871.5	ANT0	19.75
		ANT1	19.69
Mid	881	ANT0	19.99
		ANT1	19.69
High	891.5	ANT0	20.02
		ANT1	19.86

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	874	ANT0	20.08
		ANT1	20.01
Mid	881	ANT0	19.94
		ANT1	19.66
High	889	ANT0	19.90
		ANT1	19.66

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	876.5	ANT0	19.99
		ANT1	19.85
Mid	881	ANT0	19.78
		ANT1	19.51
High	886.5	ANT0	19.83
		ANT1	19.54



Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	879	ANT0	19.70
		ANT1	19.74
Mid	881	ANT0	19.75
		ANT1	19.47
High	884	ANT0	19.93
		ANT1	19.73


6.4 Setup Photograph:

Photographs are available in a separate exhibit


6.5 Plots/Data:

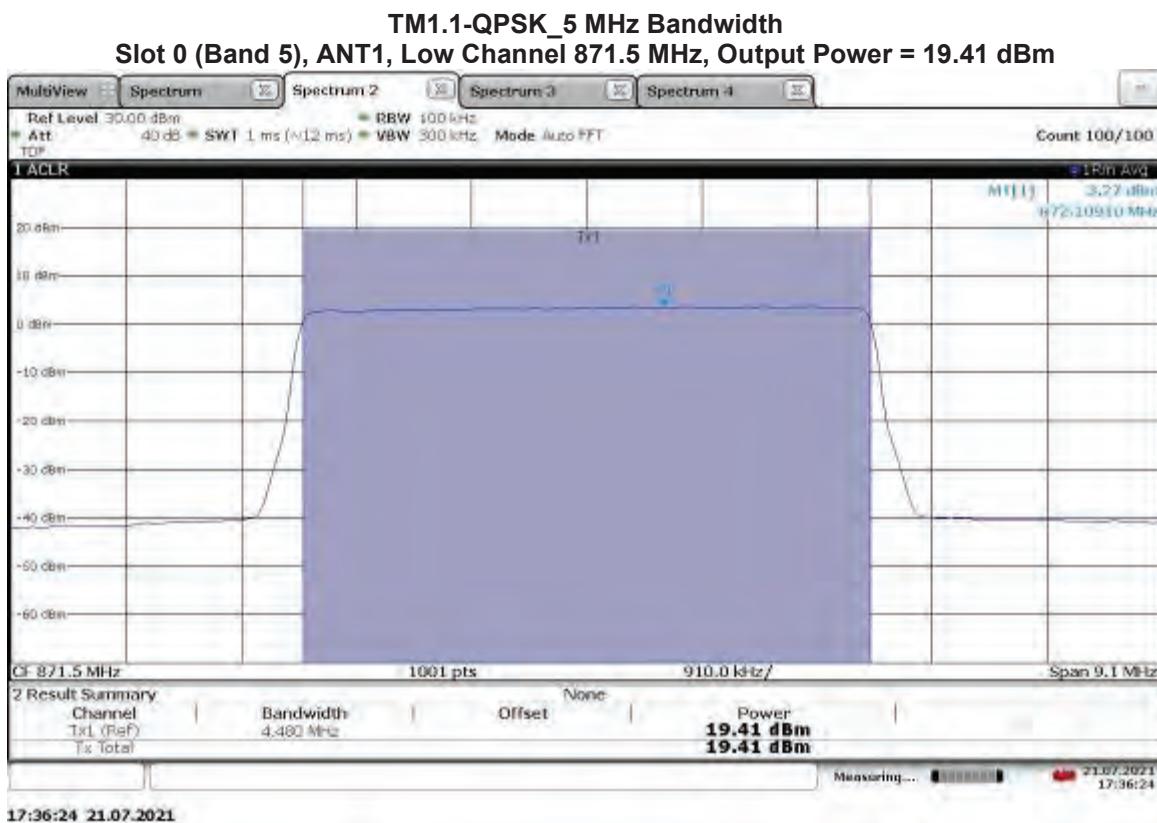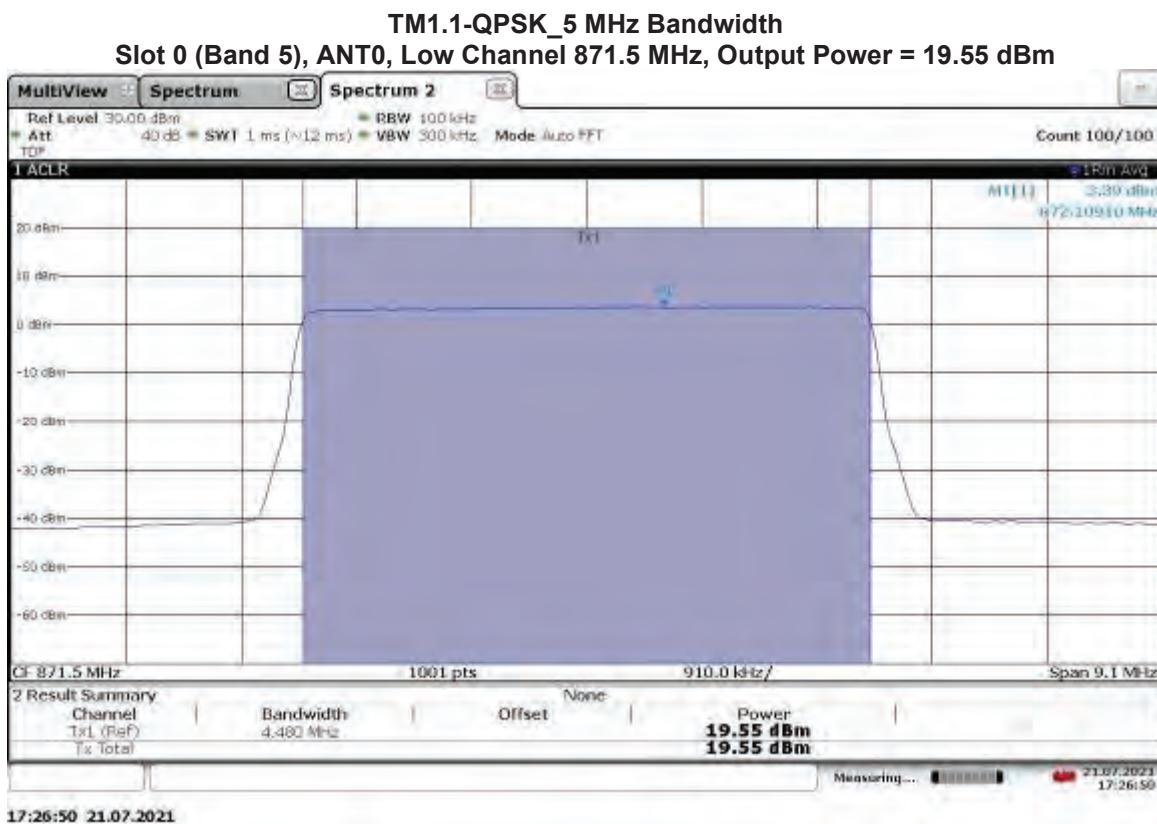


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.98 dBm

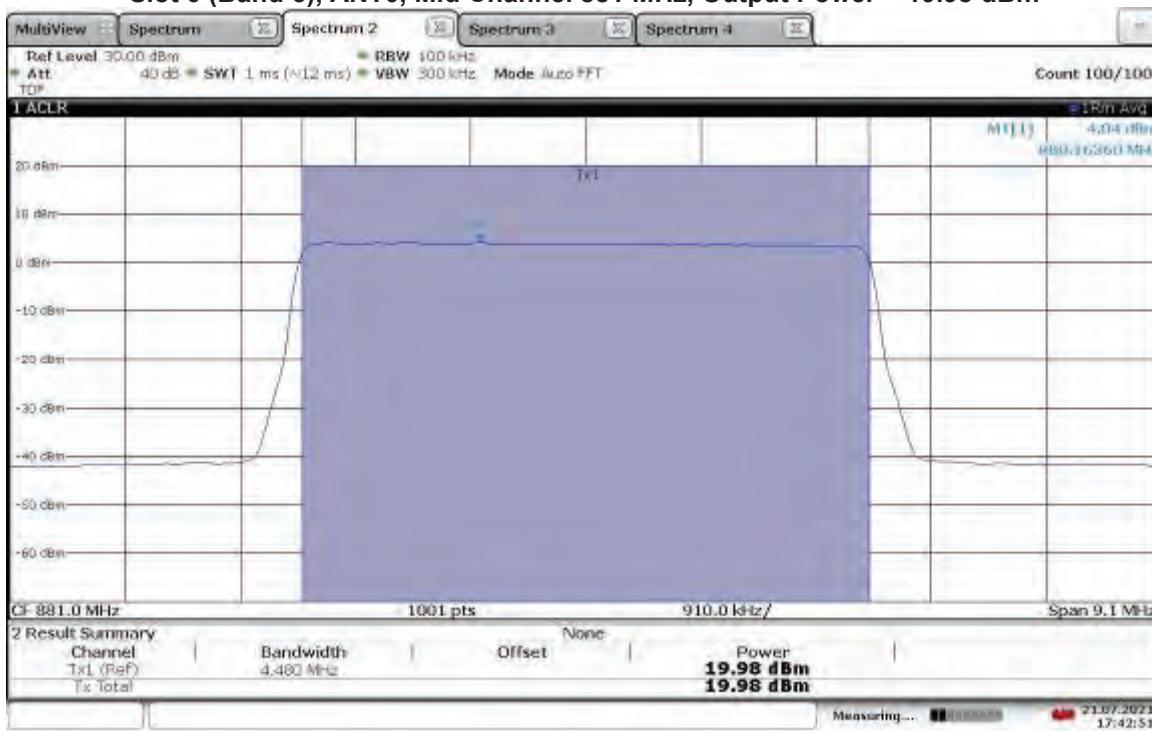


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.67 dBm

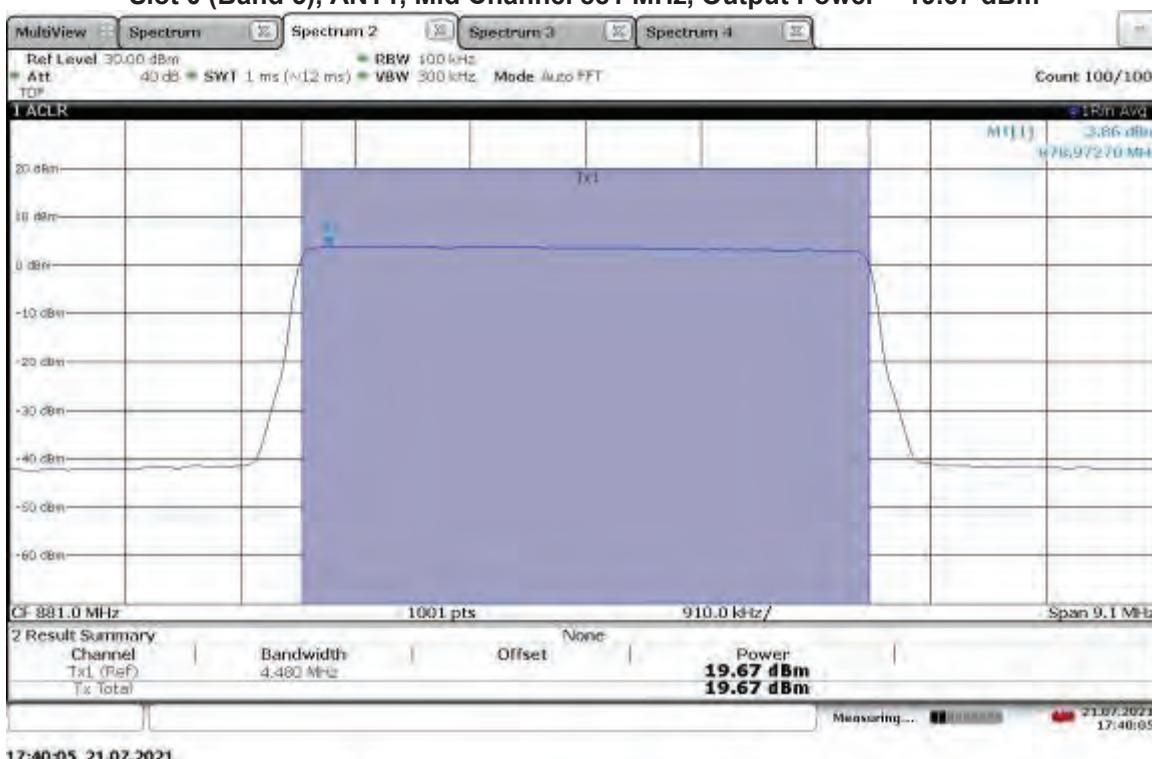


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 891.5 MHz, Output Power = 20.06 dBm

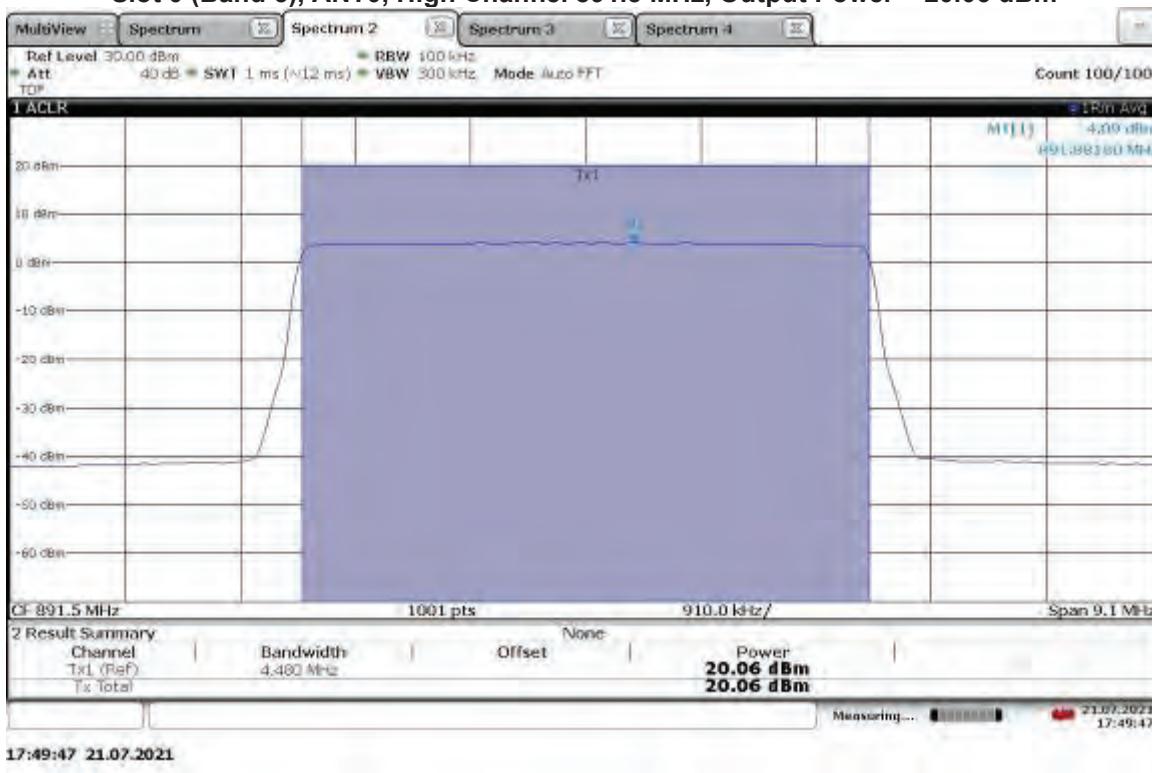


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 891.5 MHz, Output Power = 19.89 dBm

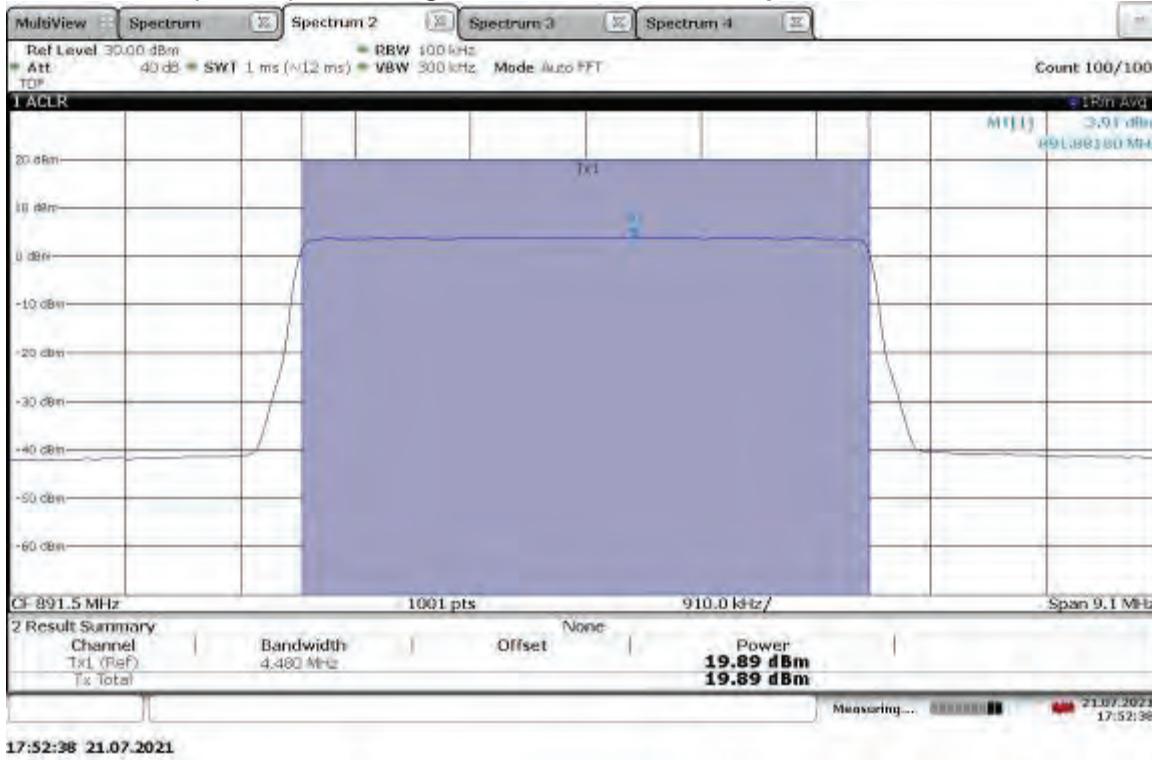


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 874 MHz, Output Power = 20.05 dBm

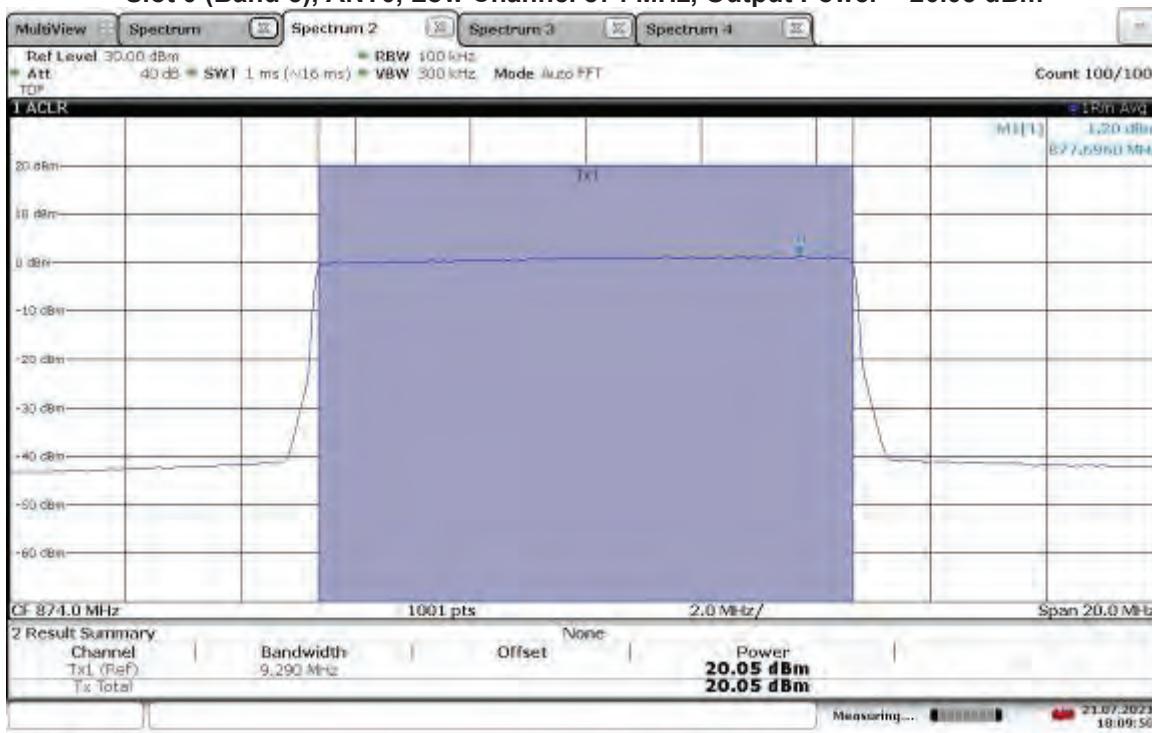


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 874 MHz, Output Power = 20.01 dBm

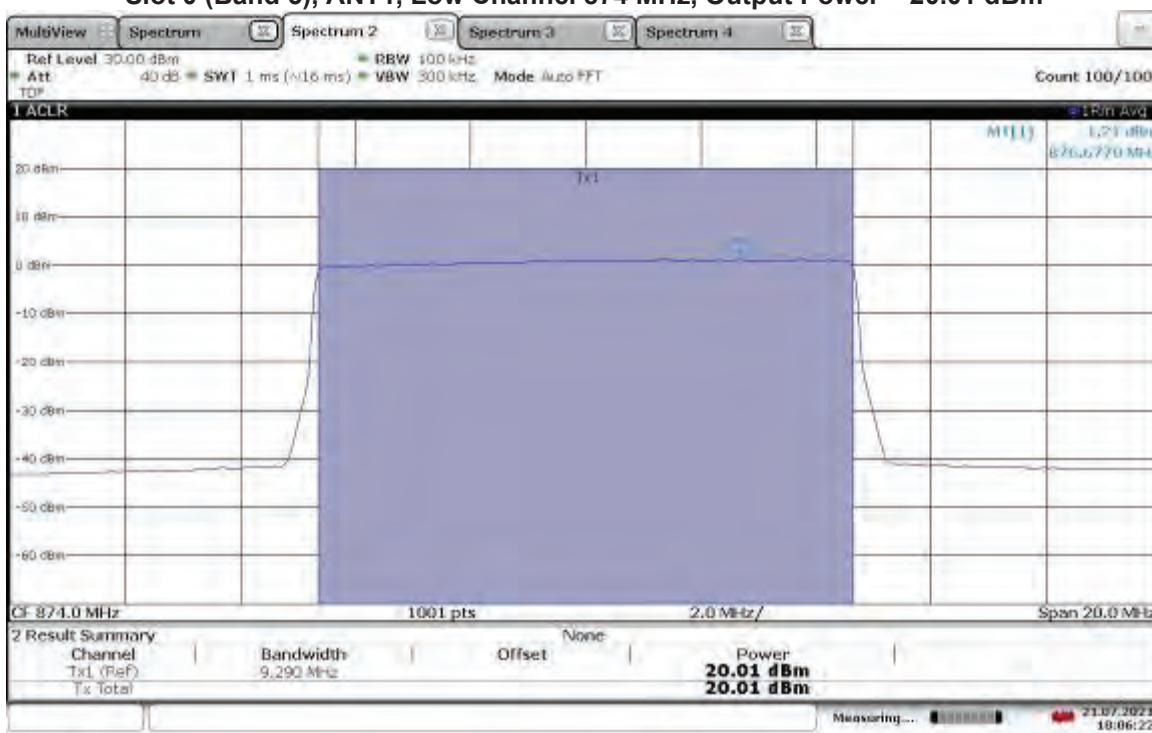


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.94 dBm

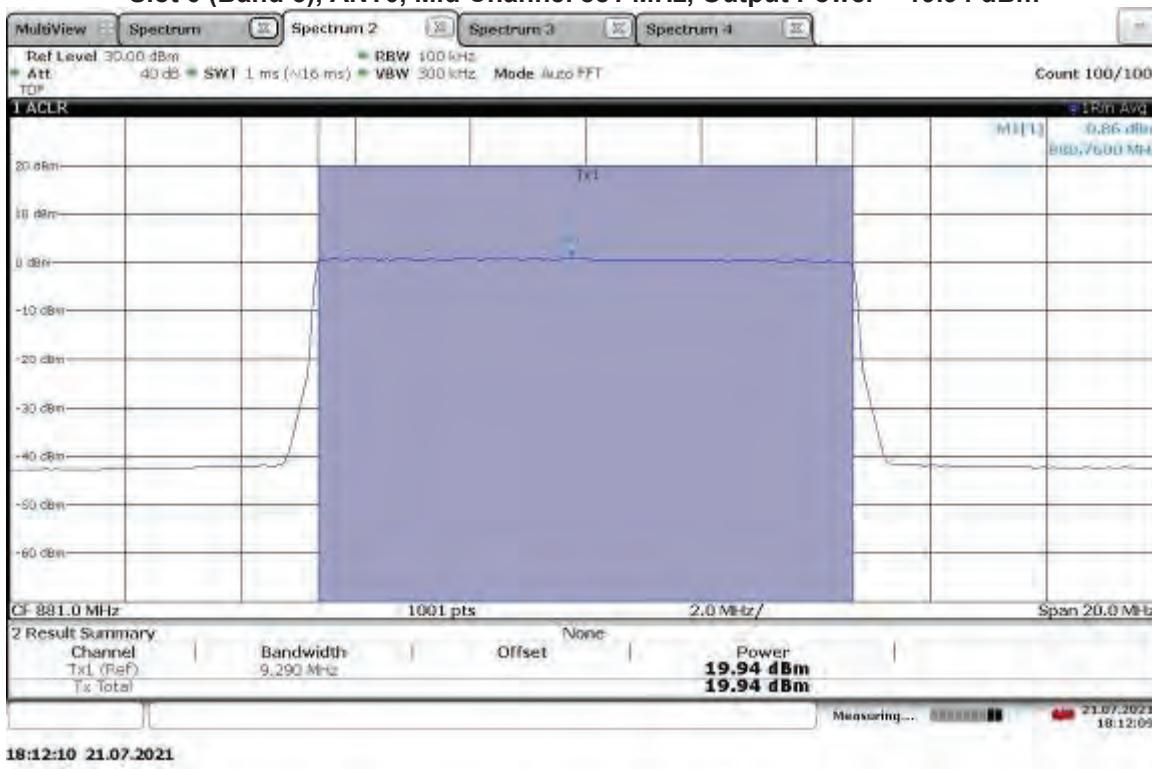


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.63 dBm

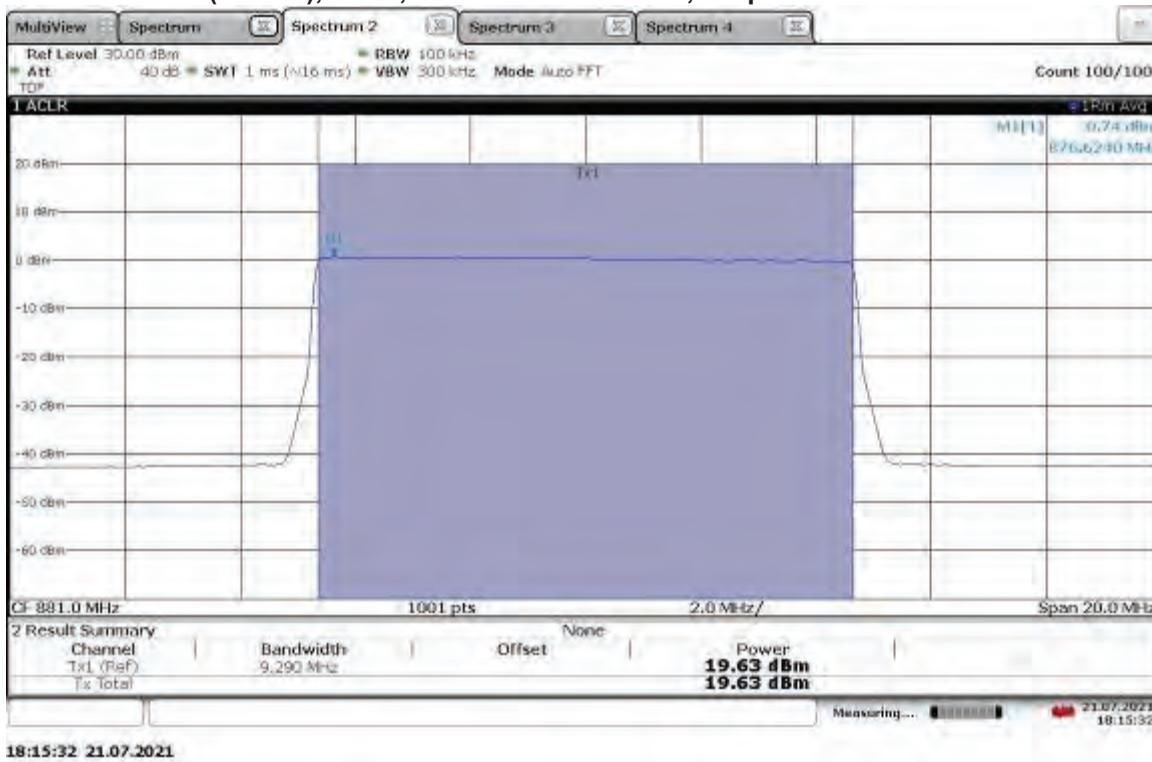

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 889 MHz, Output Power = 19.87 dBm

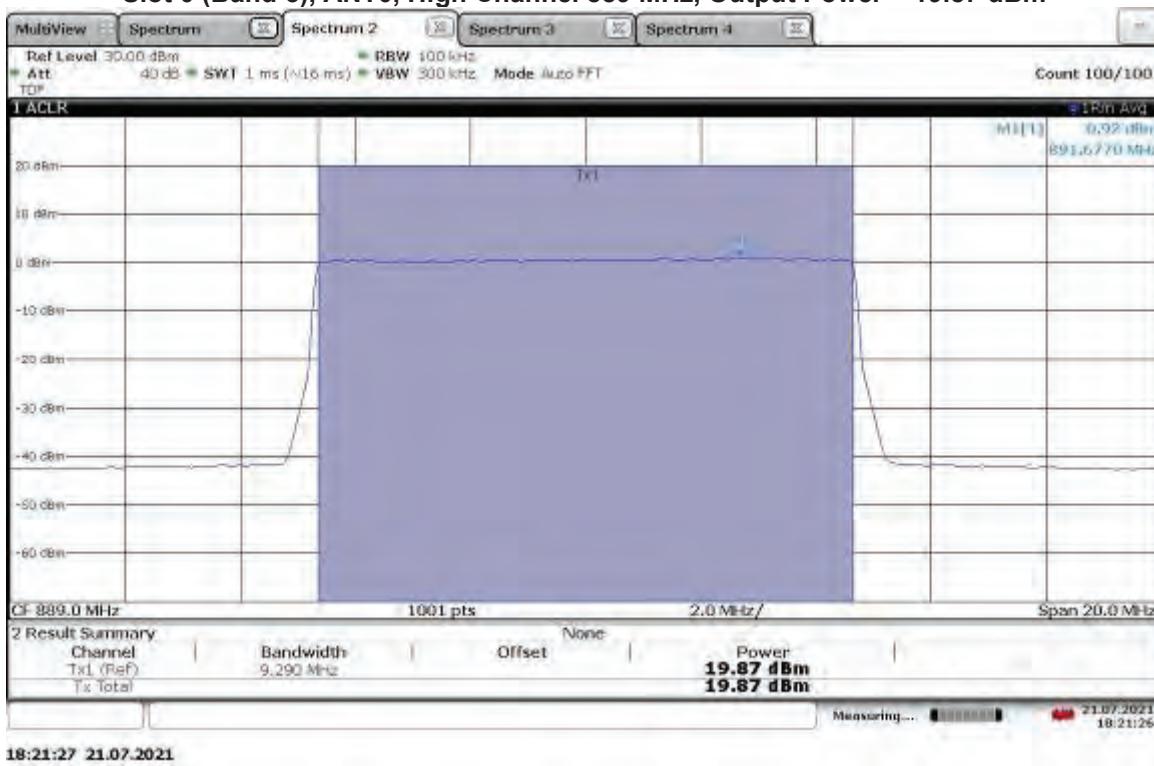


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 889 MHz, Output Power = 19.62 dBm

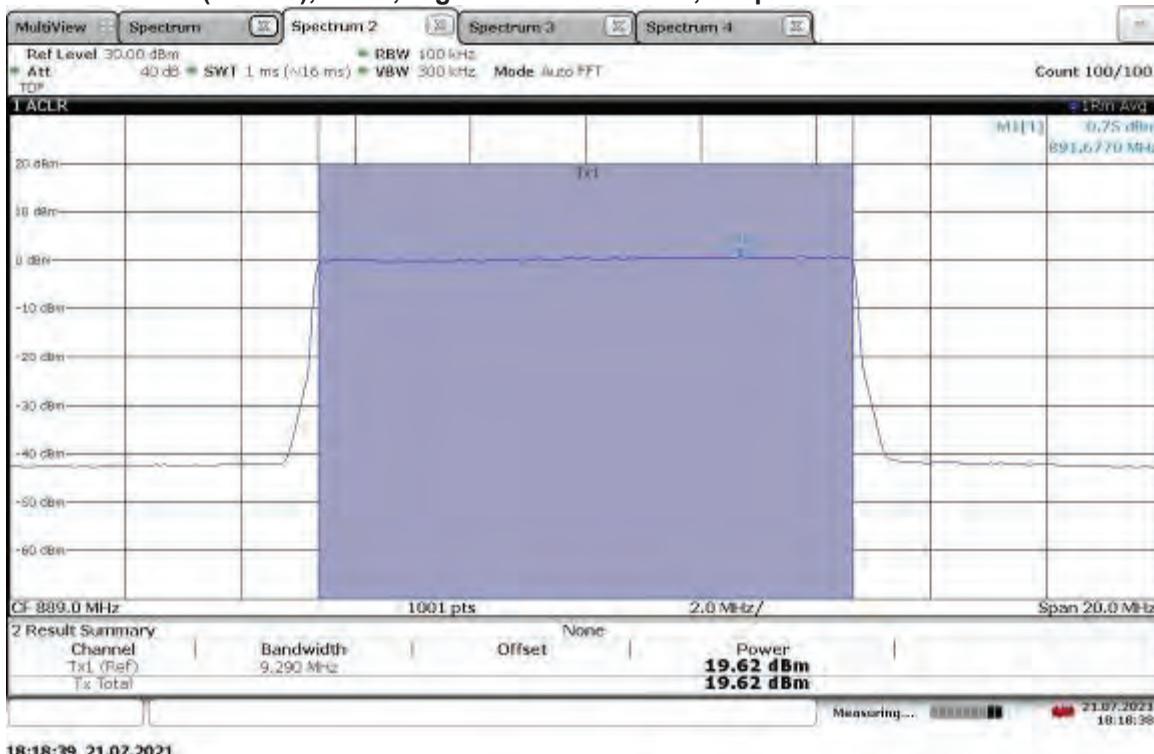


TM1.1-QPSK_15 MHz Bandwidth

Slot 0 (Band 5), ANT0, Low Channel 876.5 MHz, Output Power = 20.00 dBm

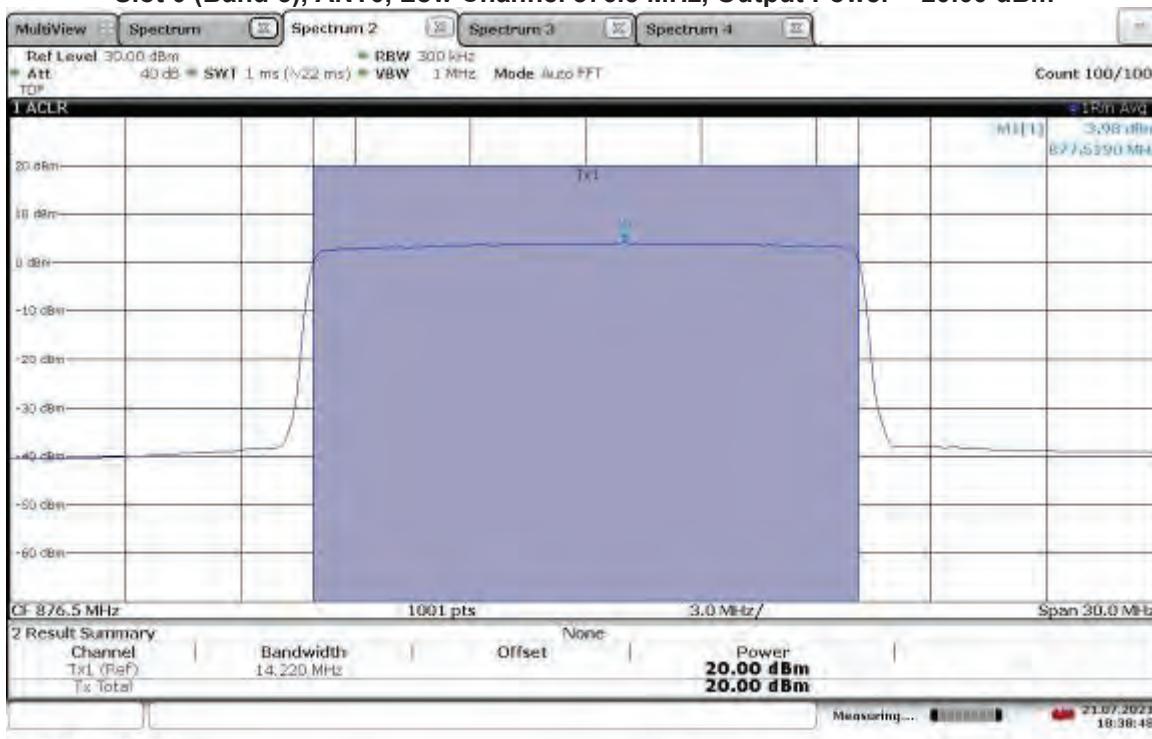


TM1.1-QPSK_15 MHz Bandwidth


Slot 0 (Band 5), ANT1, Low Channel 876.5 MHz, Output Power = 19.90 dBm

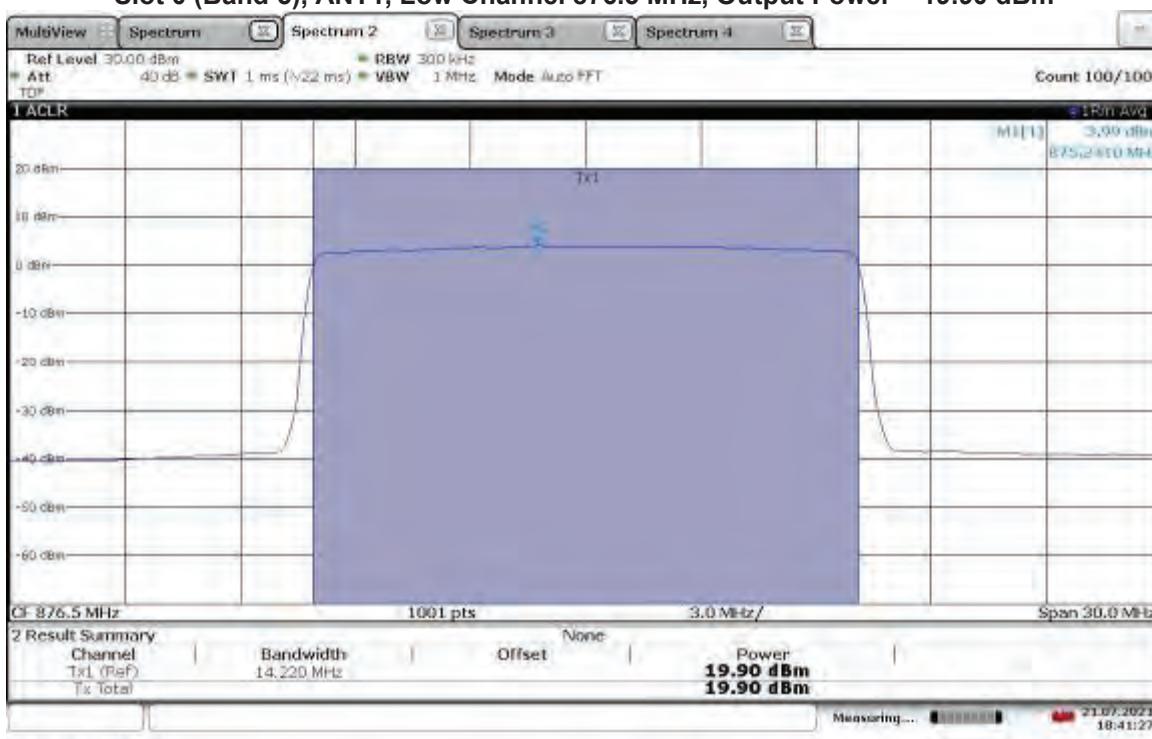


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.82 dBm

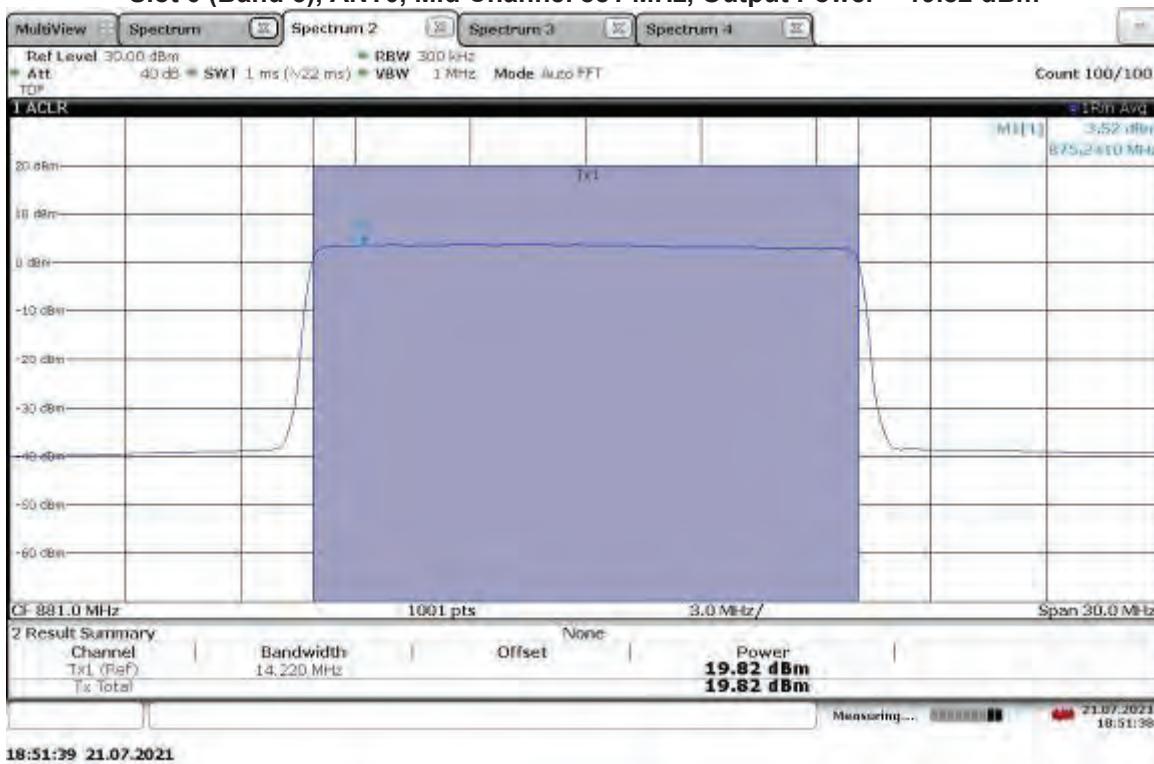


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.57 dBm

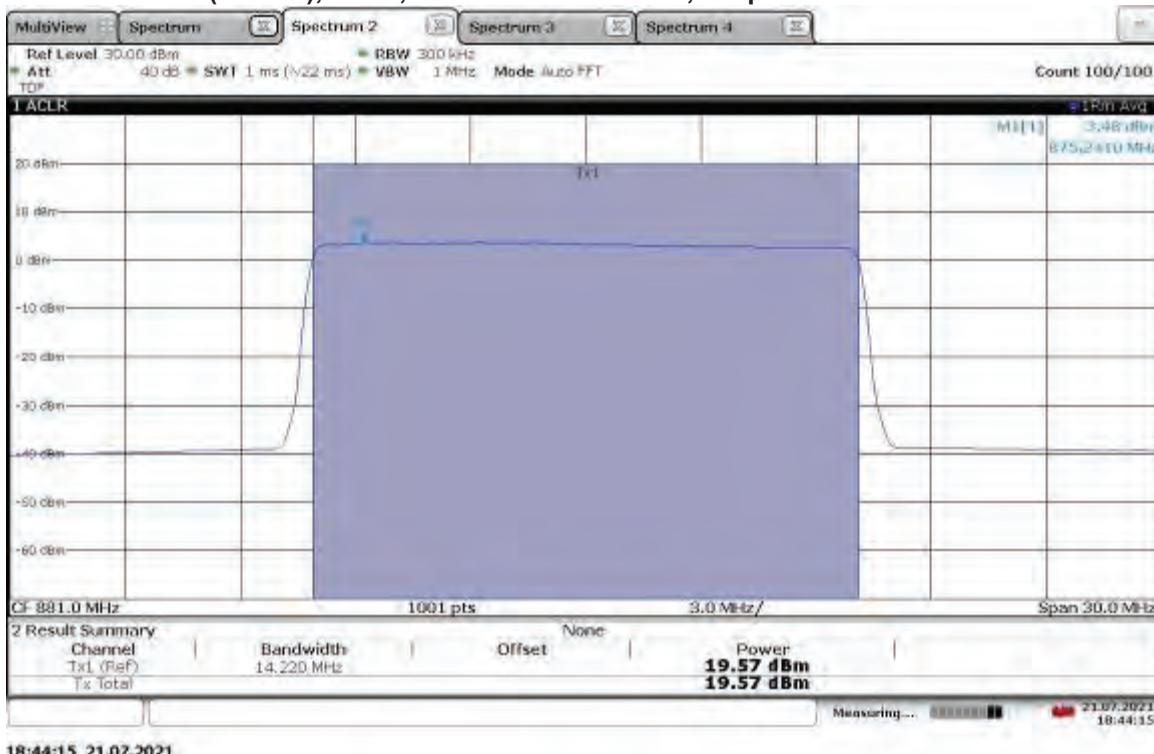


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 886.5 MHz, Output Power = 19.87 dBm

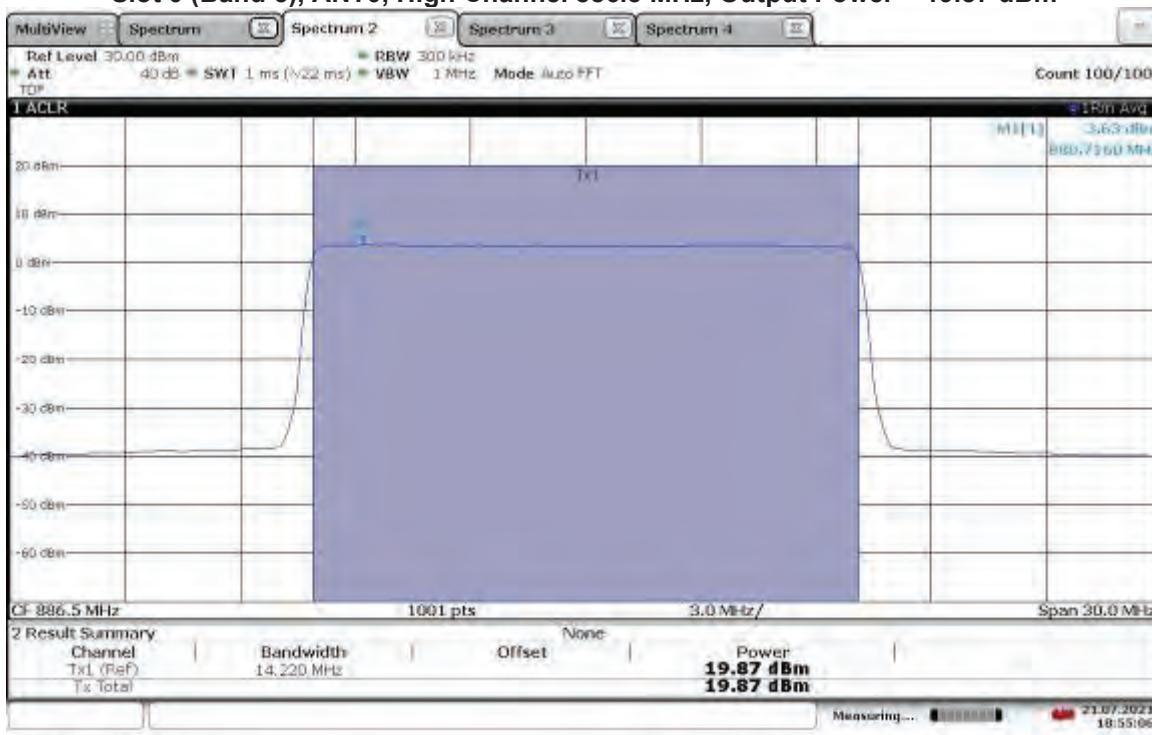


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, Output Power = 19.59 dBm

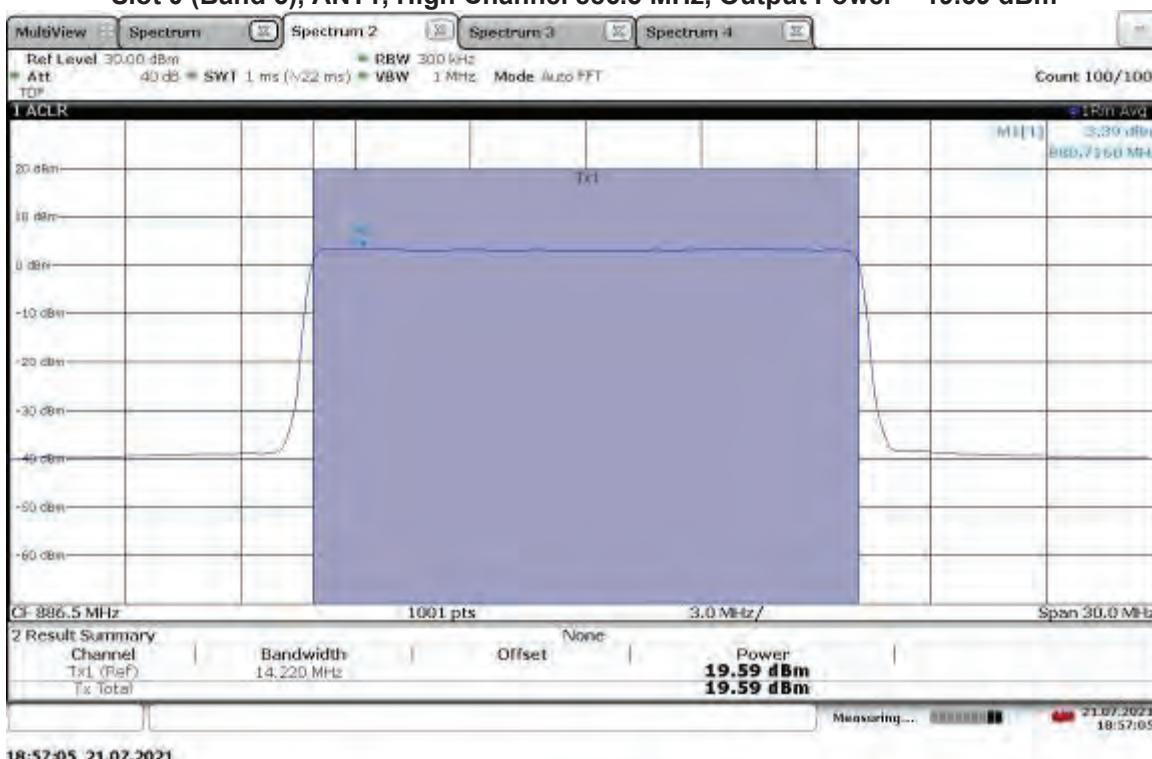


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 879 MHz, Output Power = 19.71 dBm

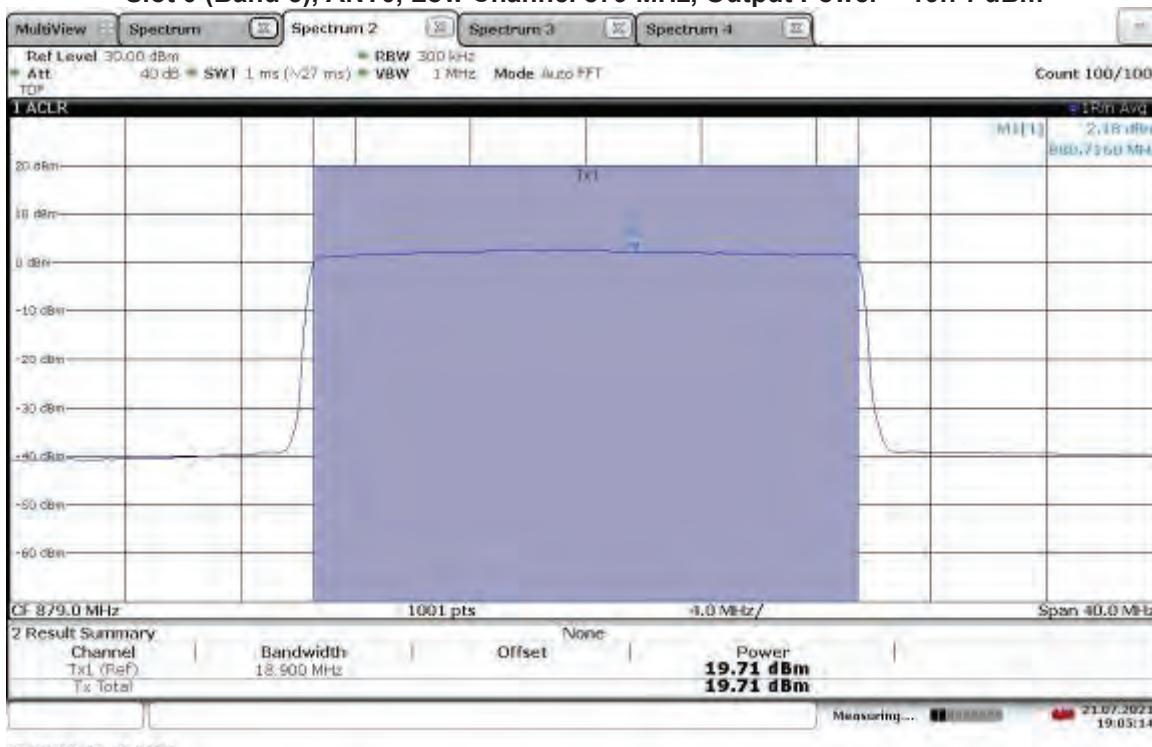


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 879 MHz, Output Power = 19.74 dBm

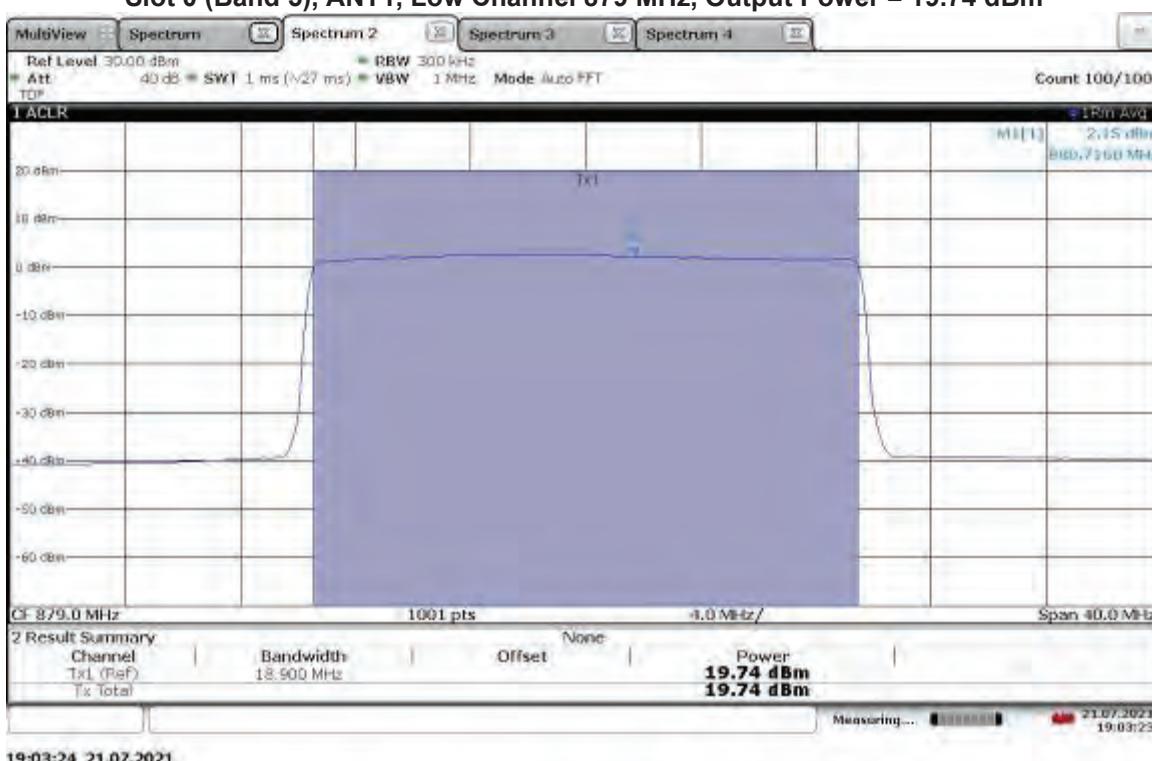


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.79 dBm

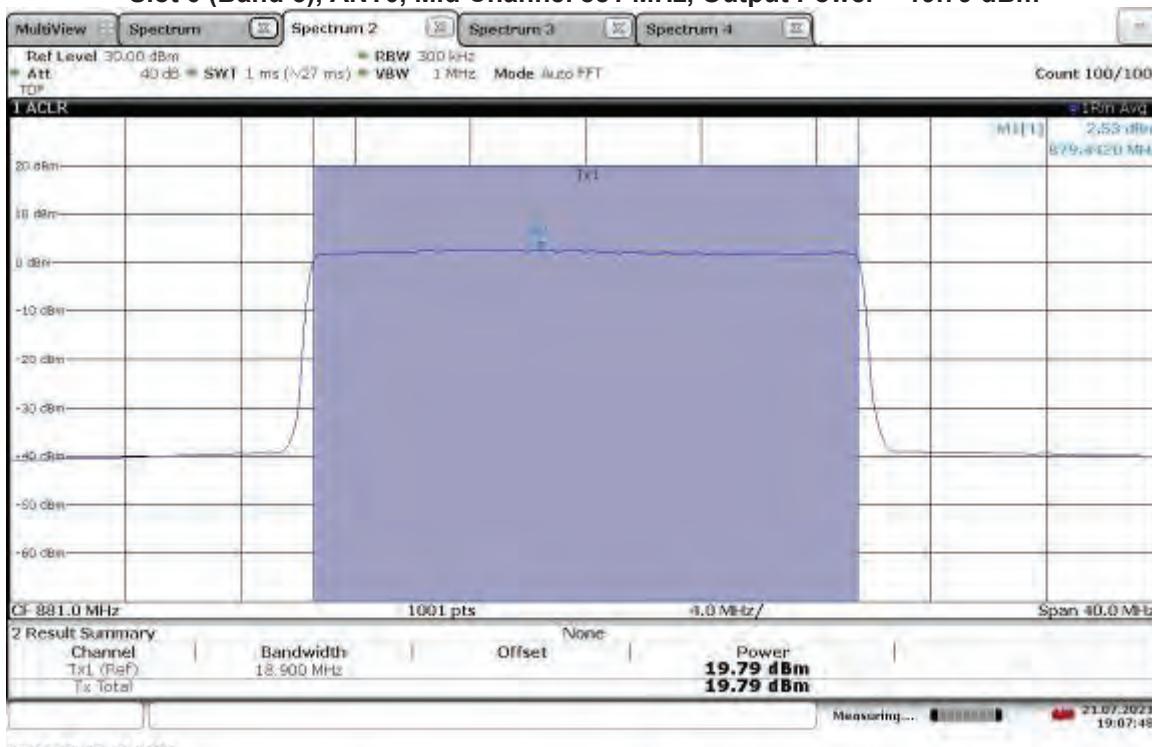


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.51 dBm

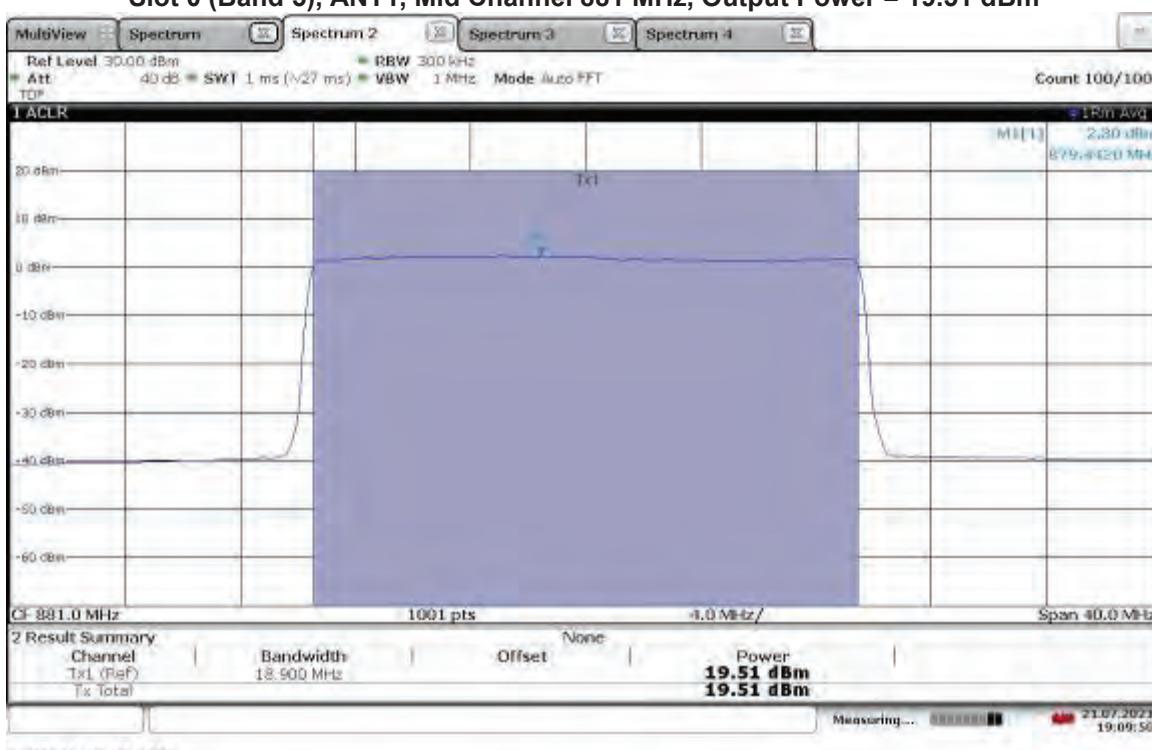


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 884 MHz, Output Power = 19.95 dBm

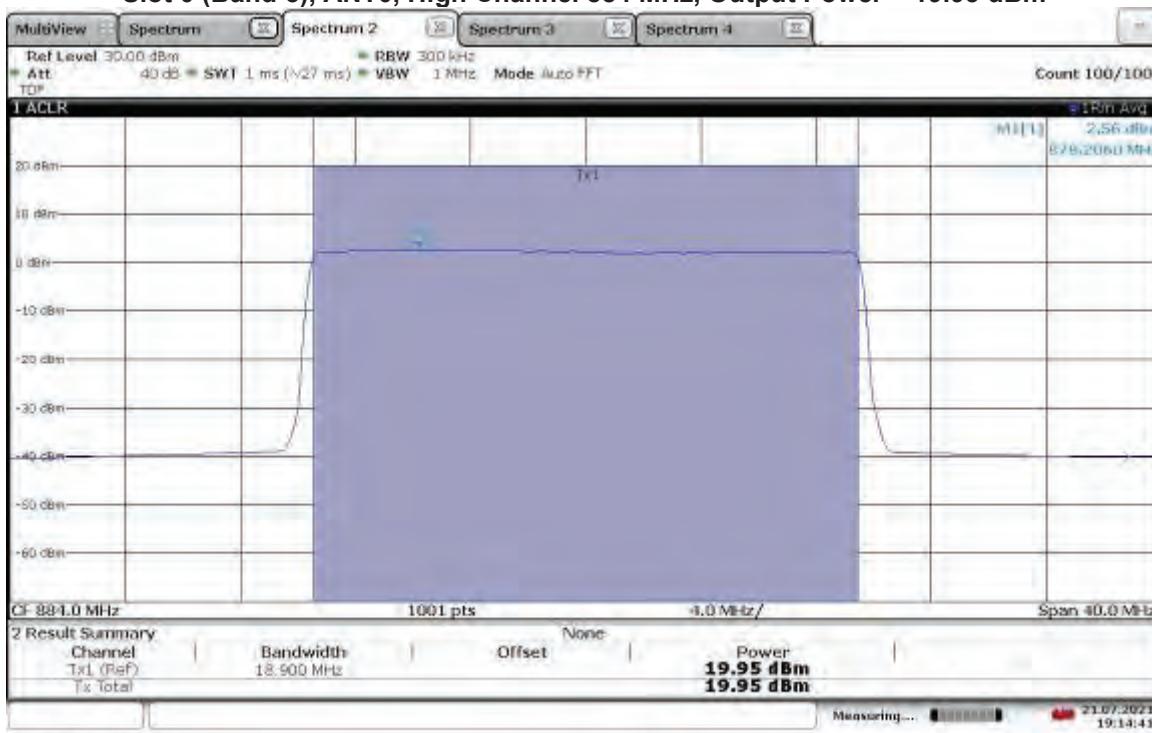


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 884 MHz, Output Power = 19.76 dBm

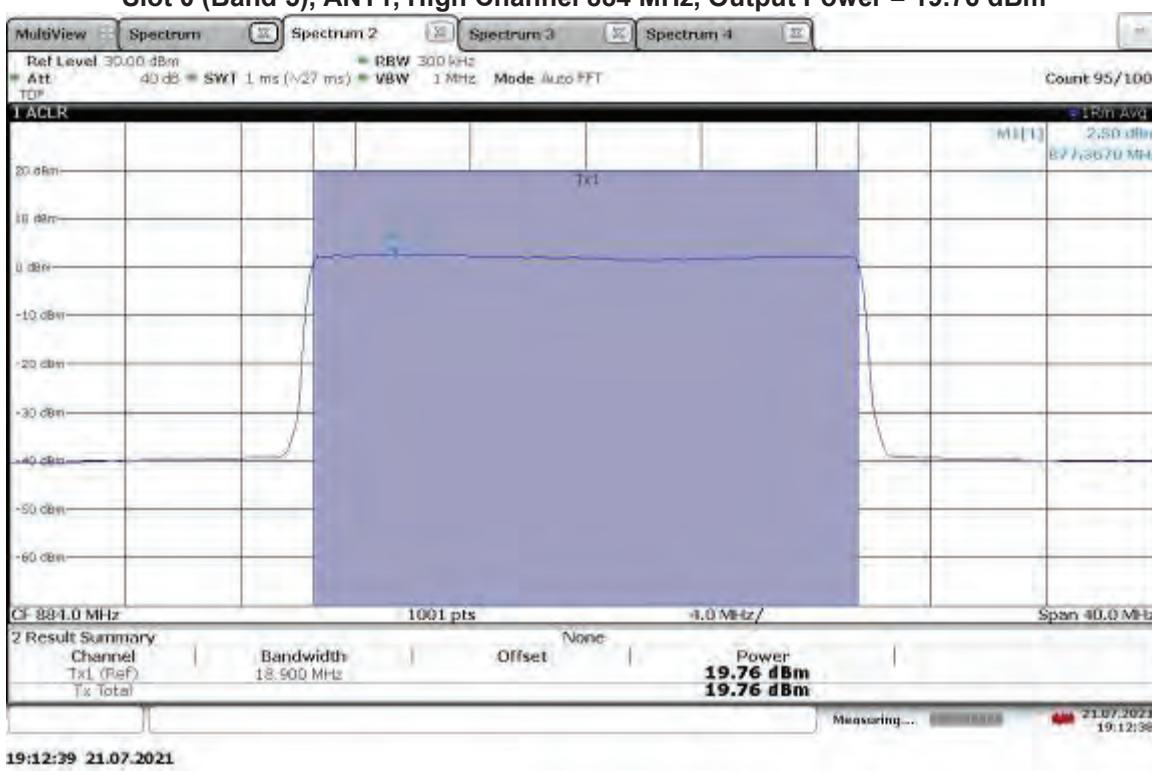


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 871.5 MHz, Output Power = 19.85 dBm

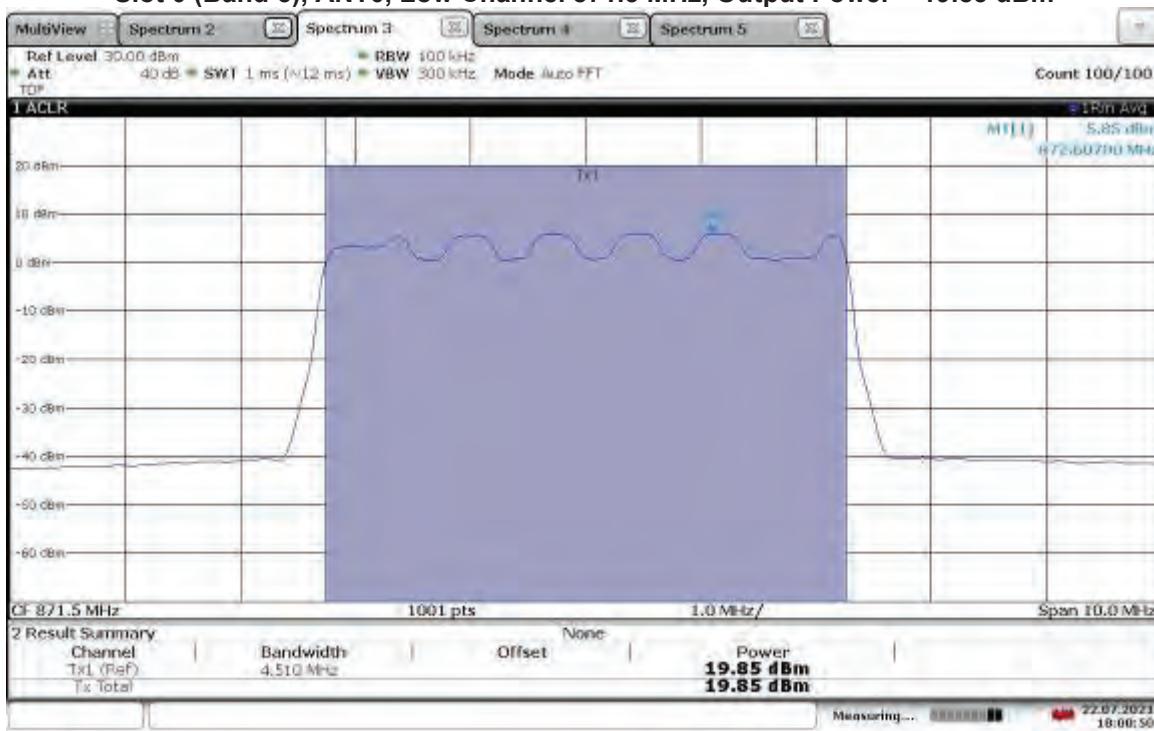


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 871.5 MHz, Output Power = 19.71 dBm

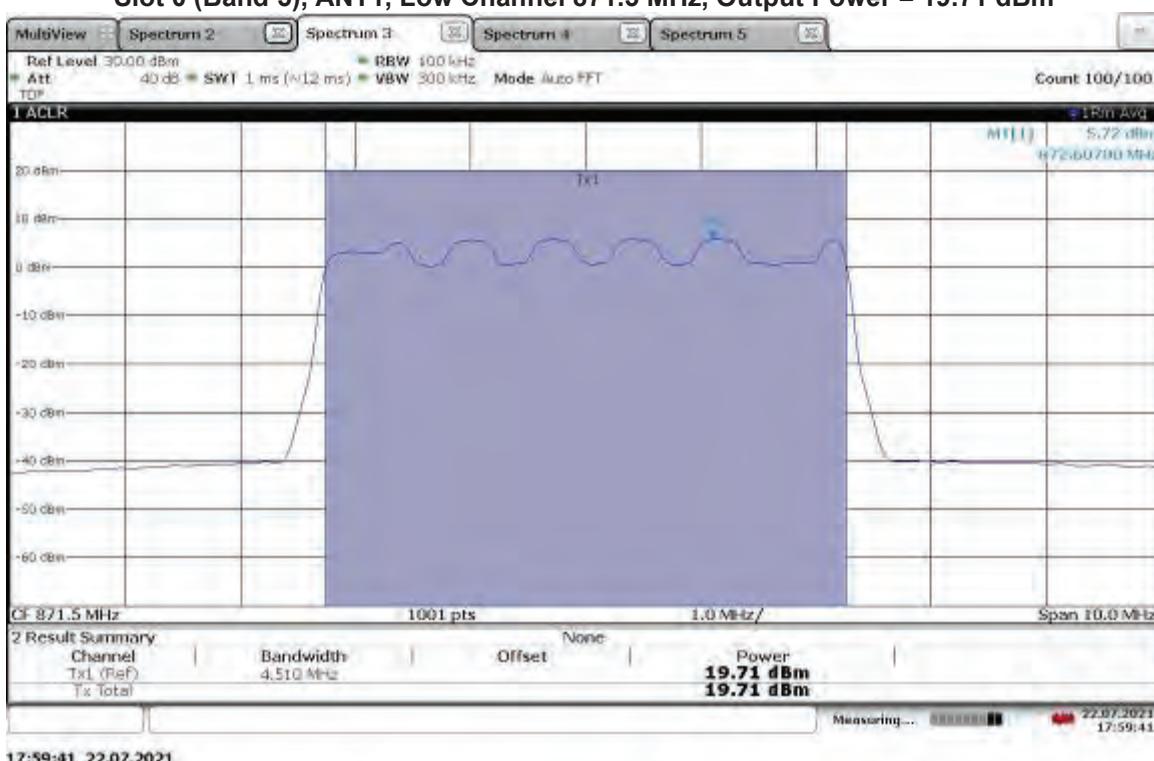


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.99 dBm

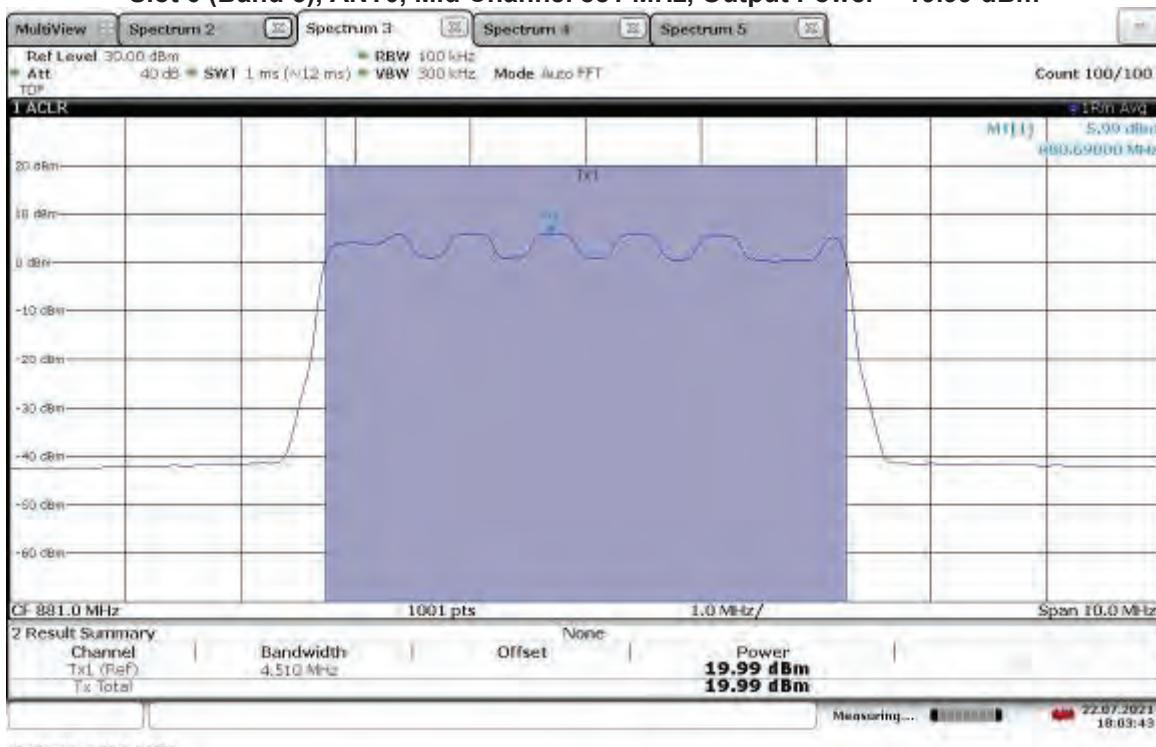


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.76 dBm

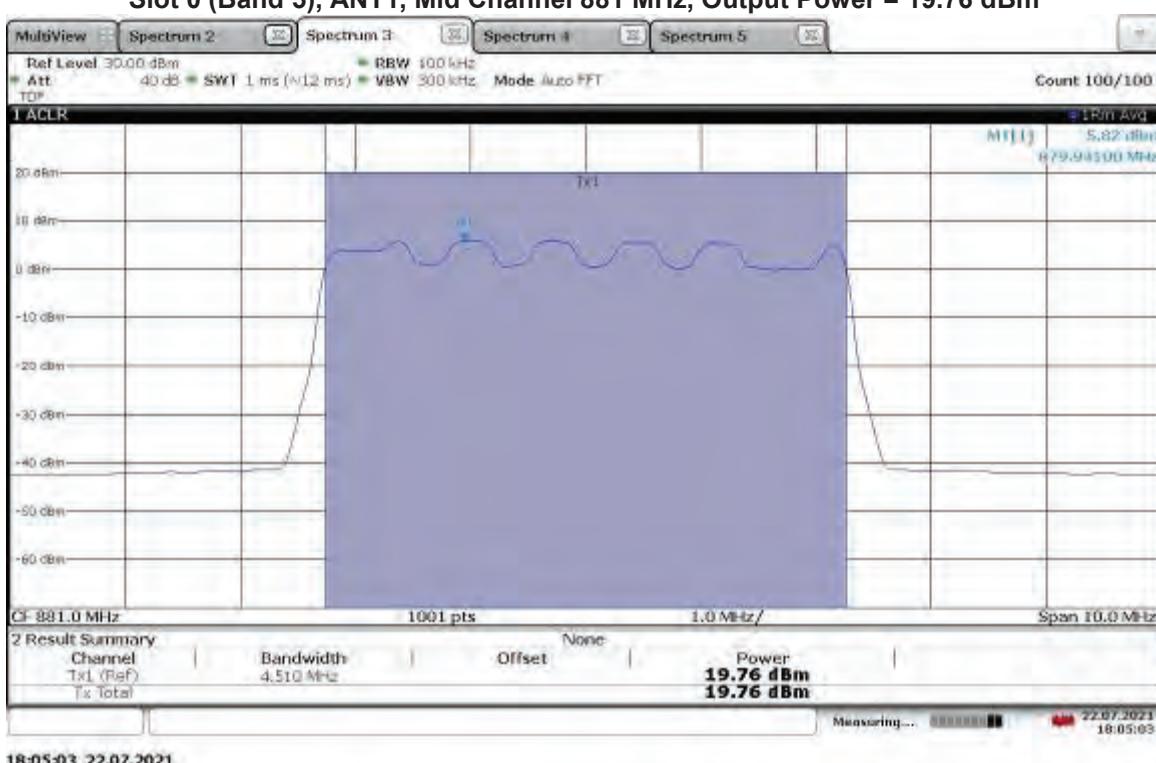


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 891.5 MHz, Output Power = 20.13 dBm

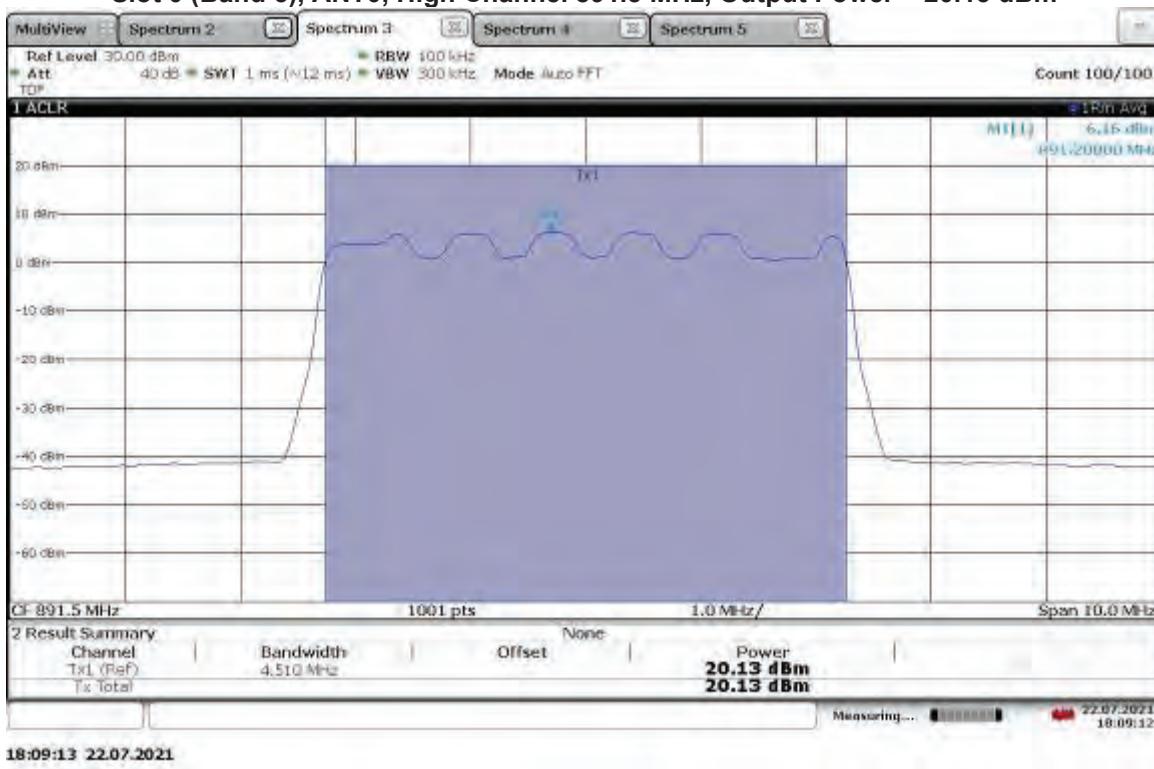


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 891.5MHz, Output Power = 19.92 dBm

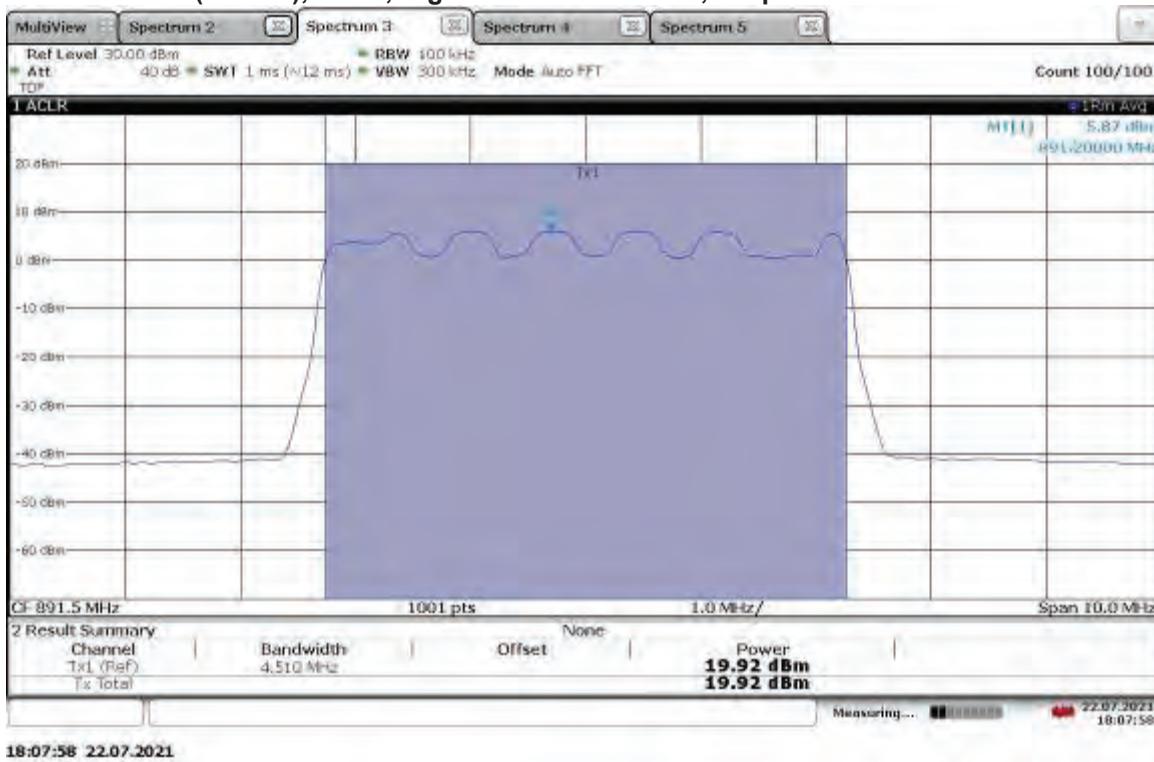


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 874 MHz, Output Power = 20.14 dBm

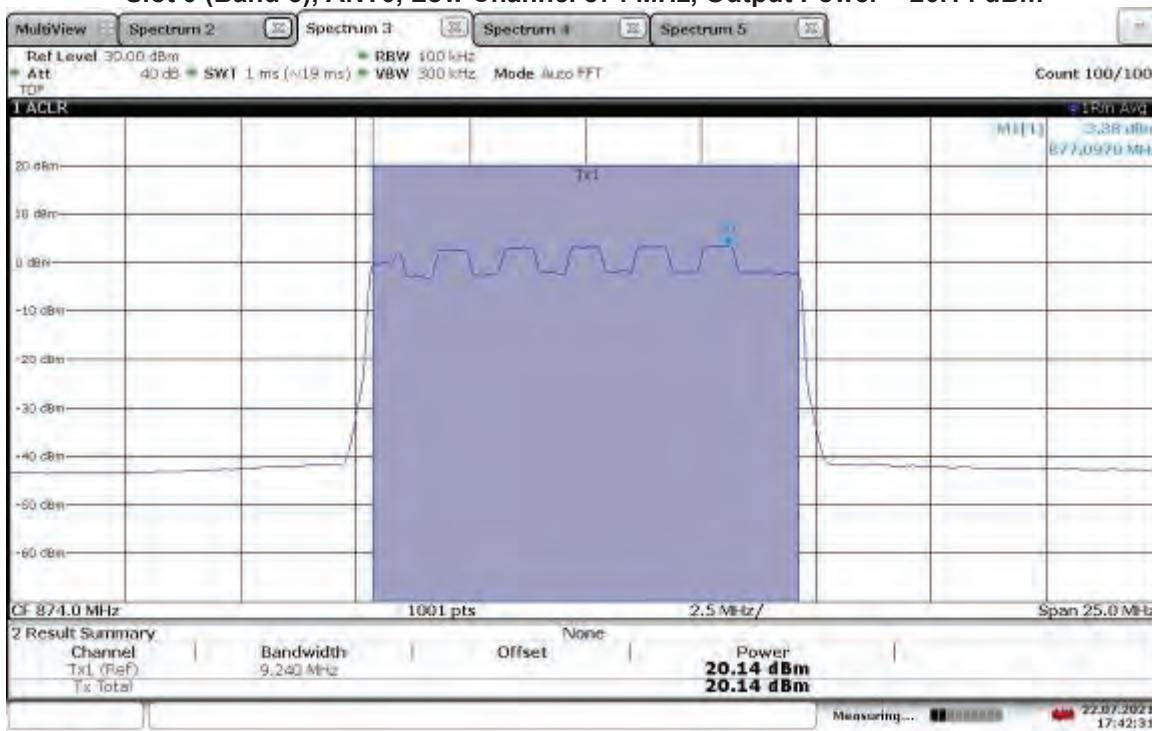


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 874 MHz, Output Power = 20.07 dBm

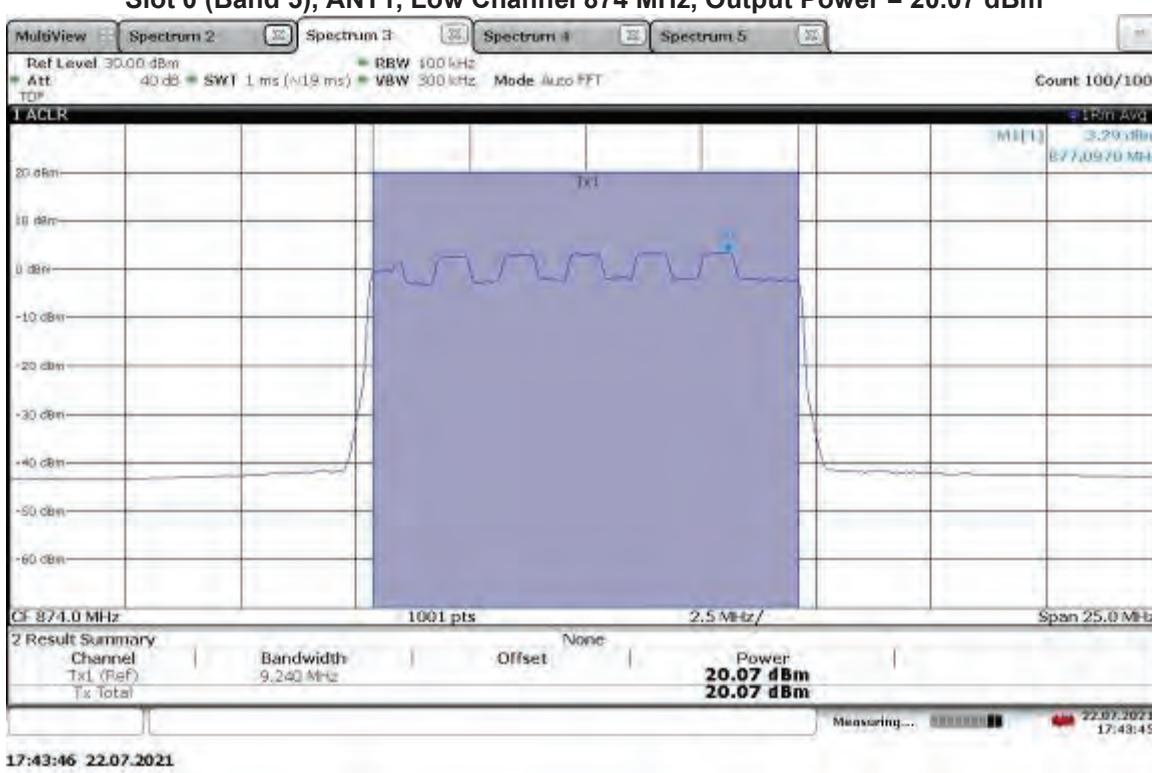


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 20.00 dBm

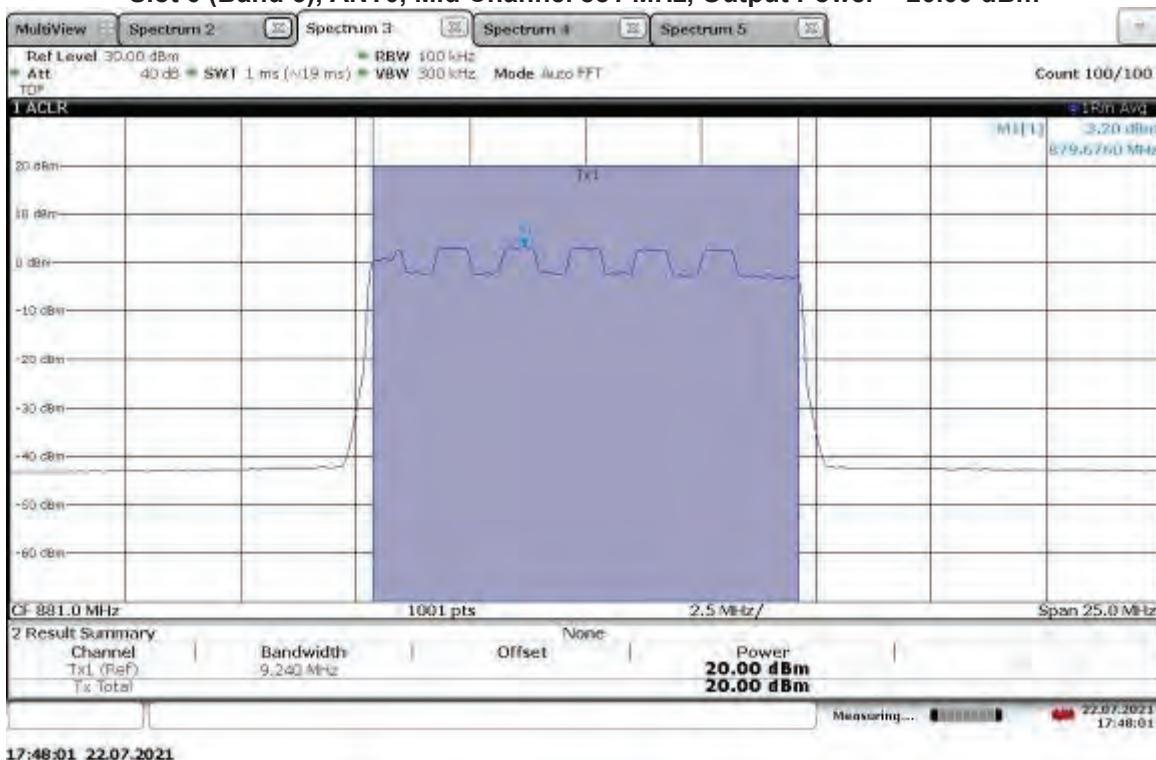


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.73 dBm

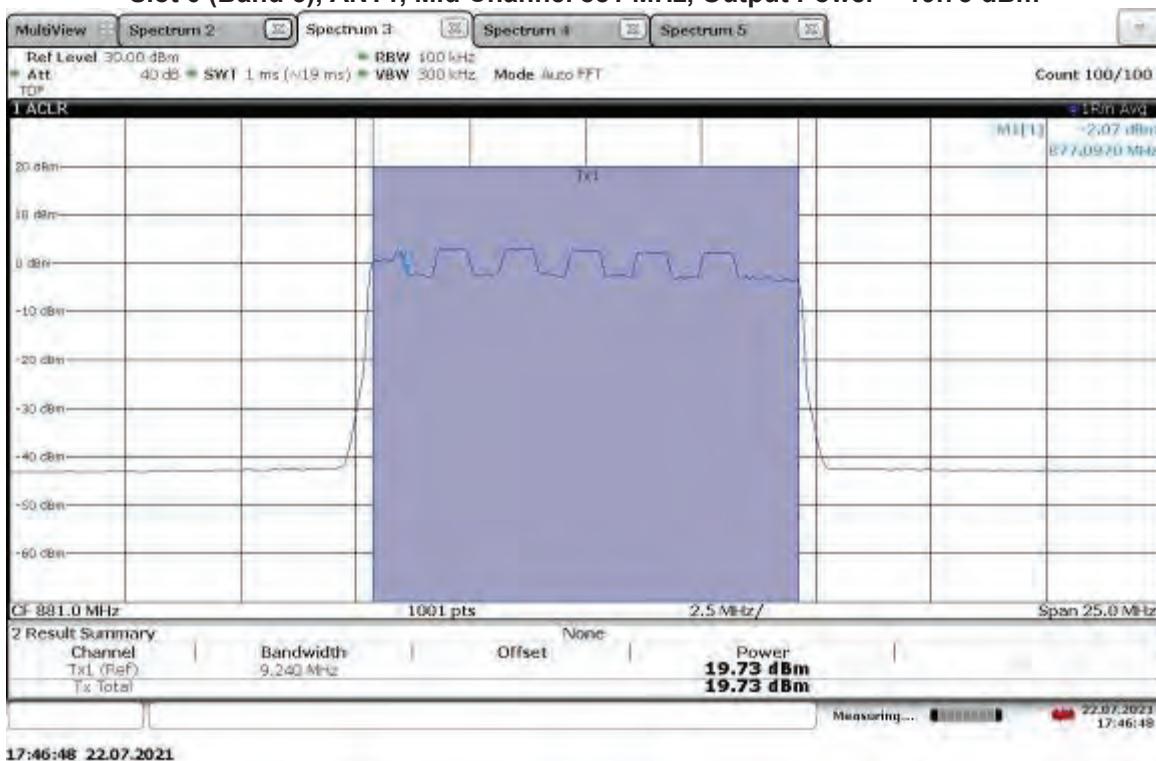


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 889 MHz, Output Power = 19.97 dBm

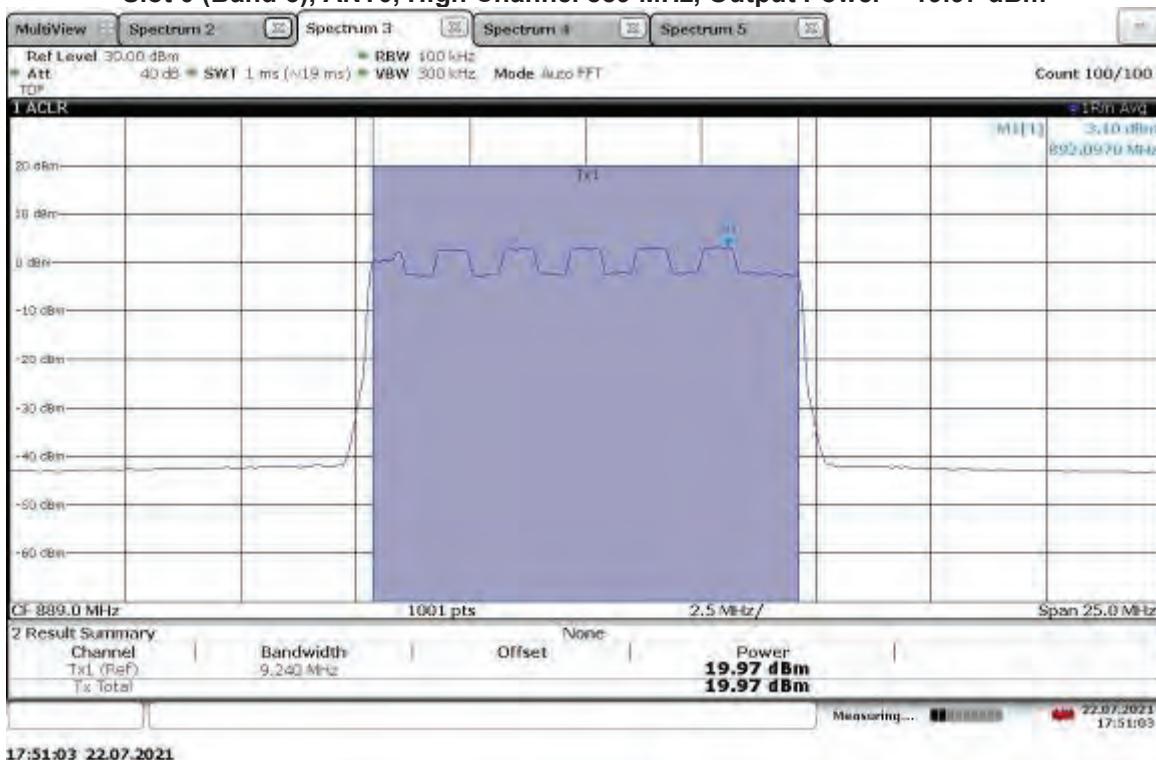


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 889 MHz, Output Power = 19.71 dBm

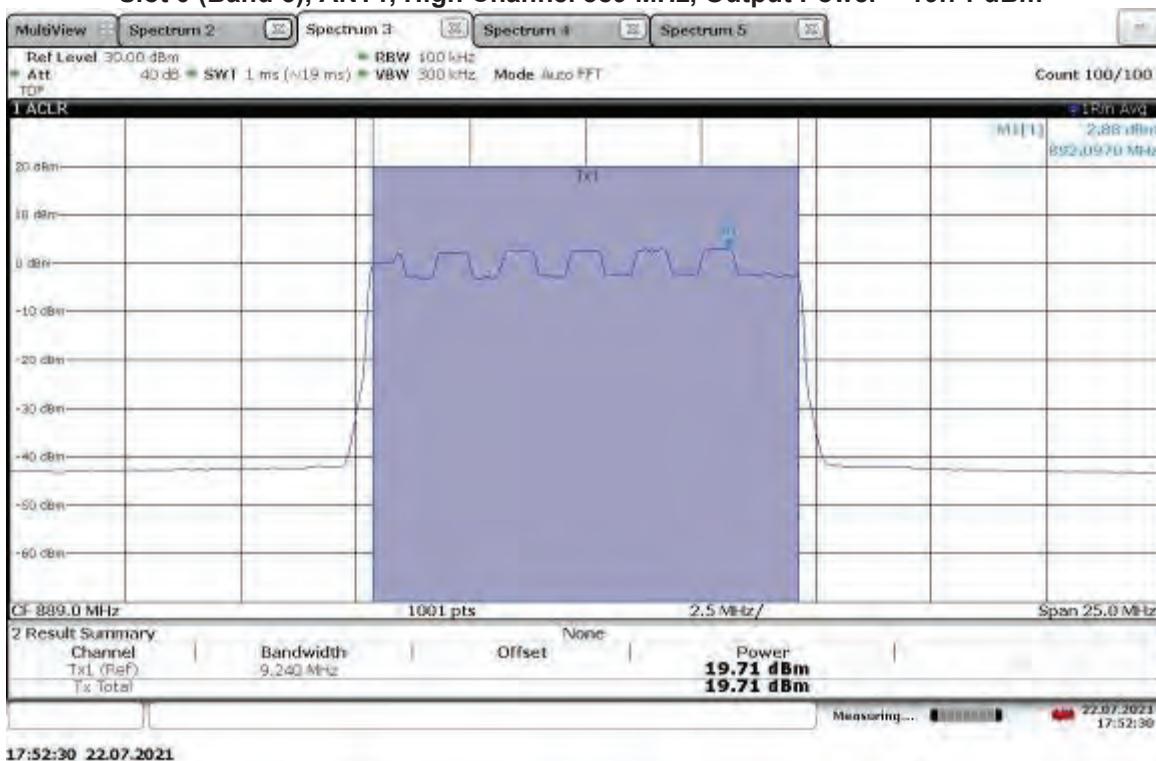


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 876.5 MHz, Output Power = 19.98 dBm

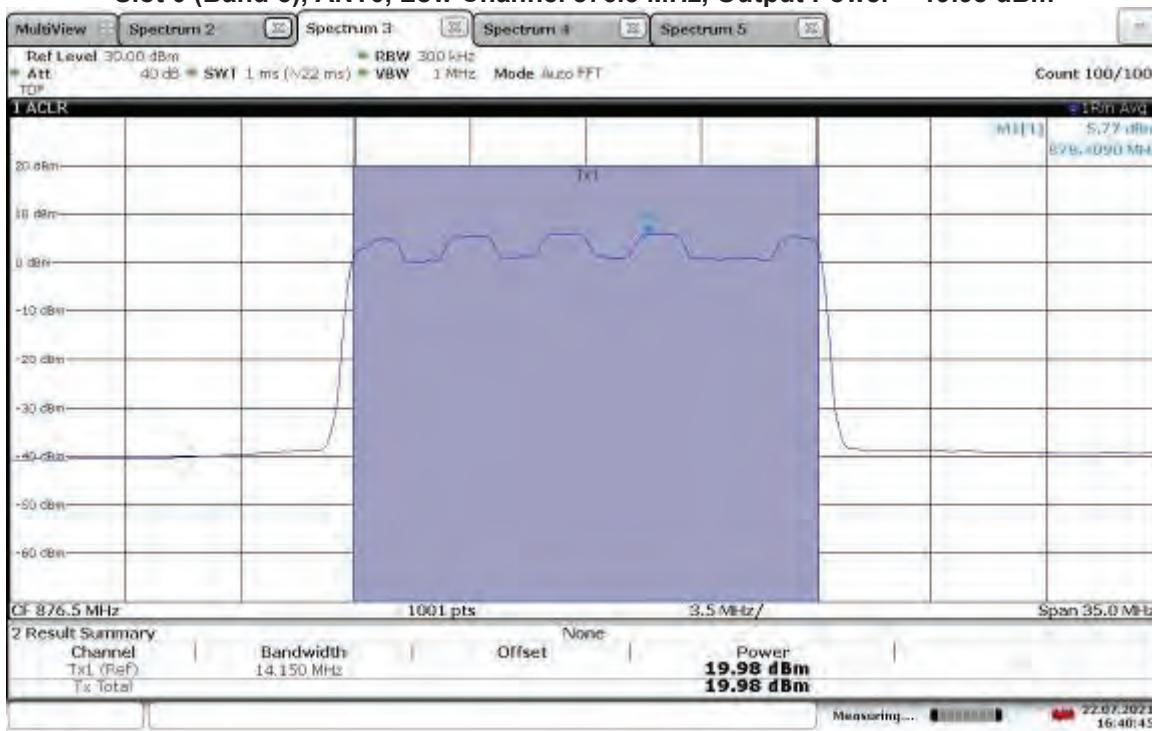


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 876.5 MHz, Output Power = 19.85 dBm

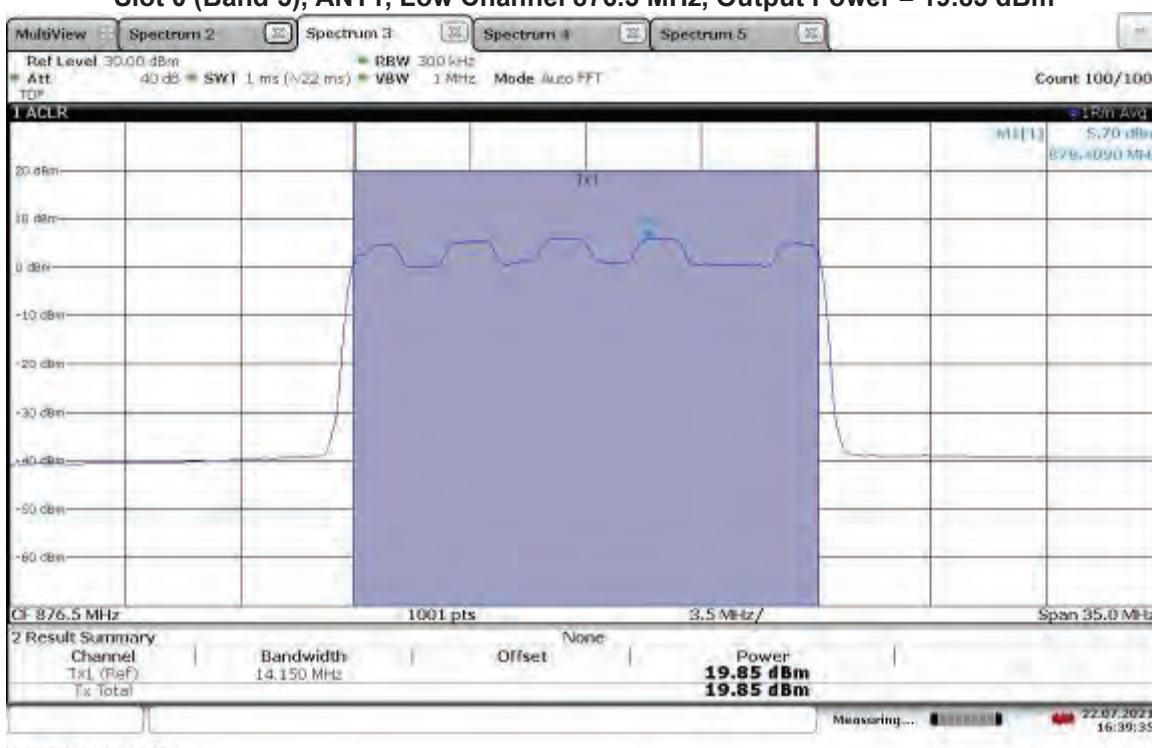


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.49 dBm

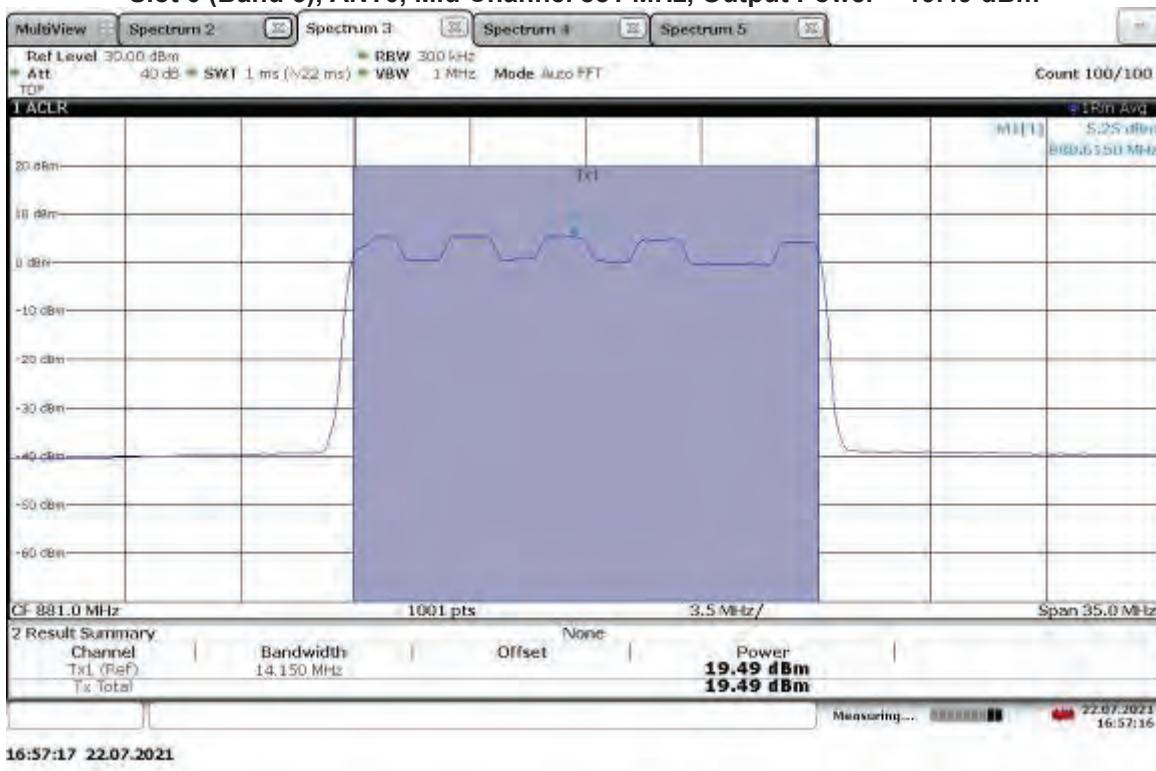


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.74 dBm

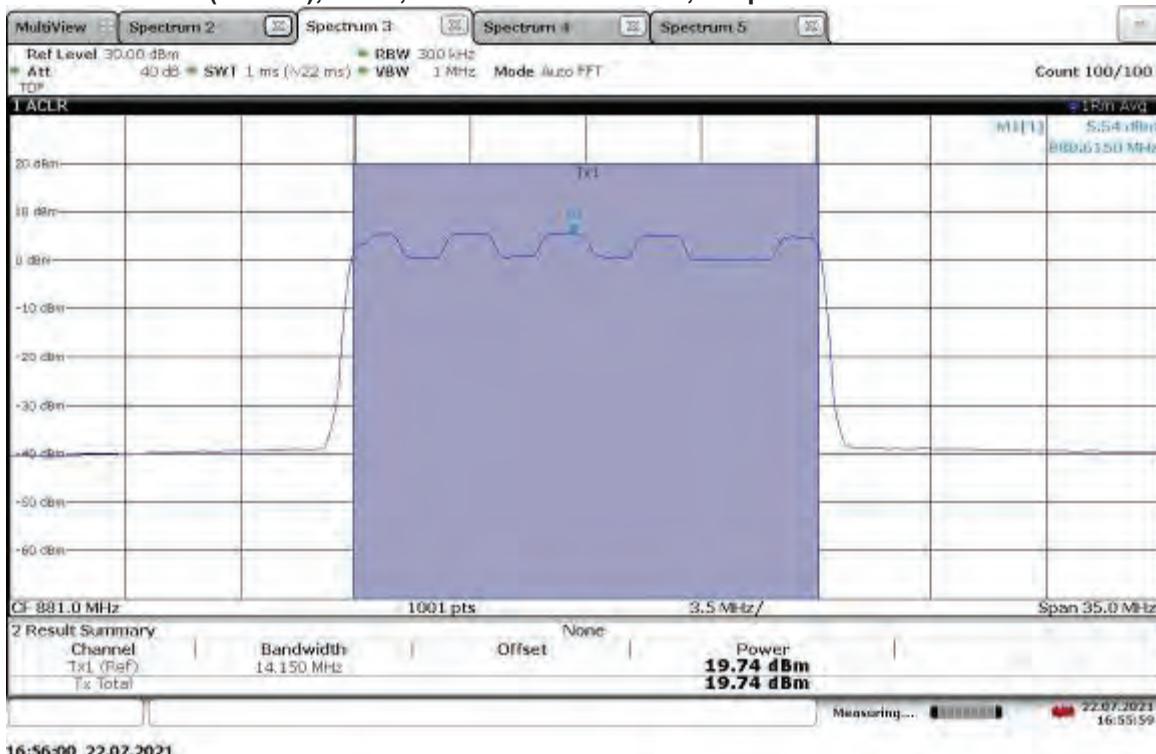


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, Output Power = 19.81 dBm

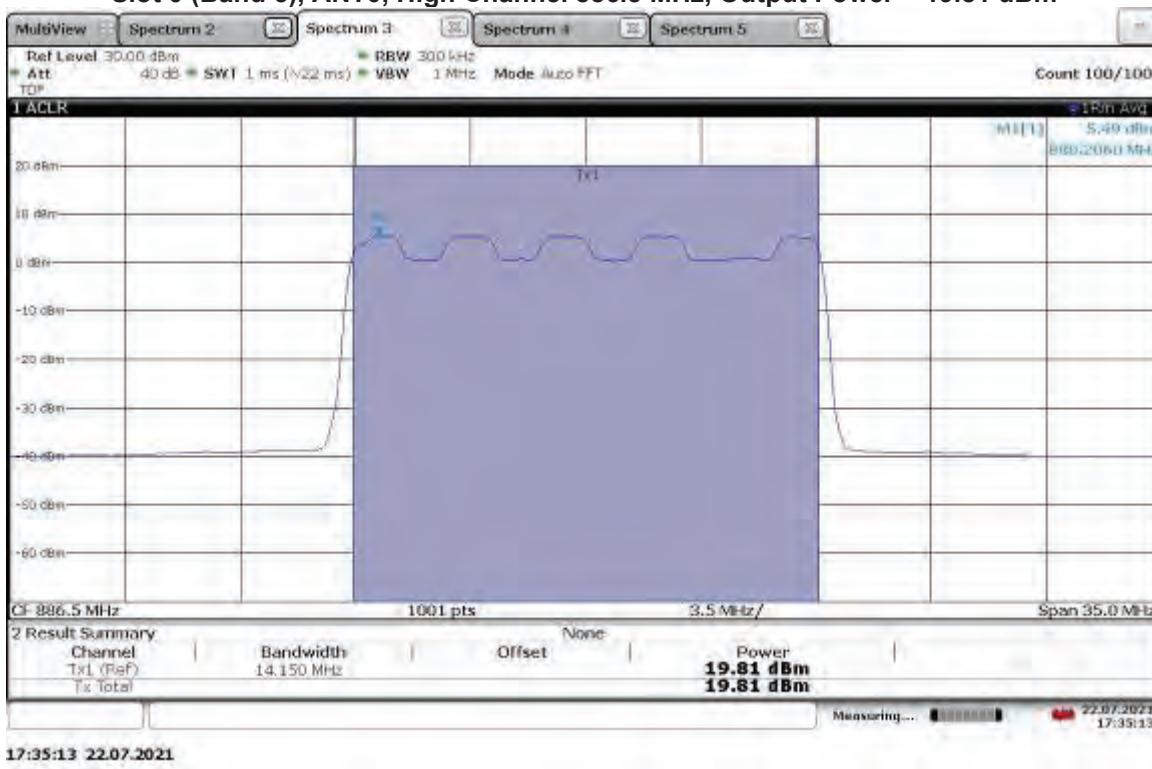


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, Output Power = 19.53 dBm

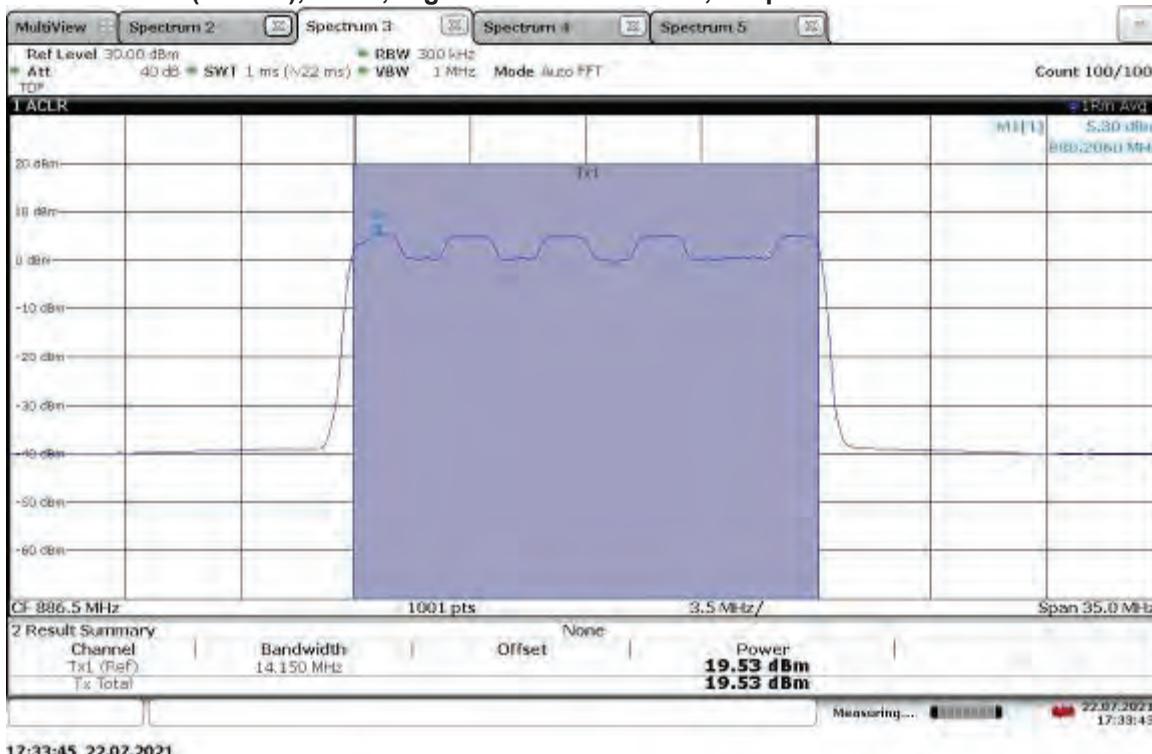


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 879 MHz, Output Power = 19.25 dBm

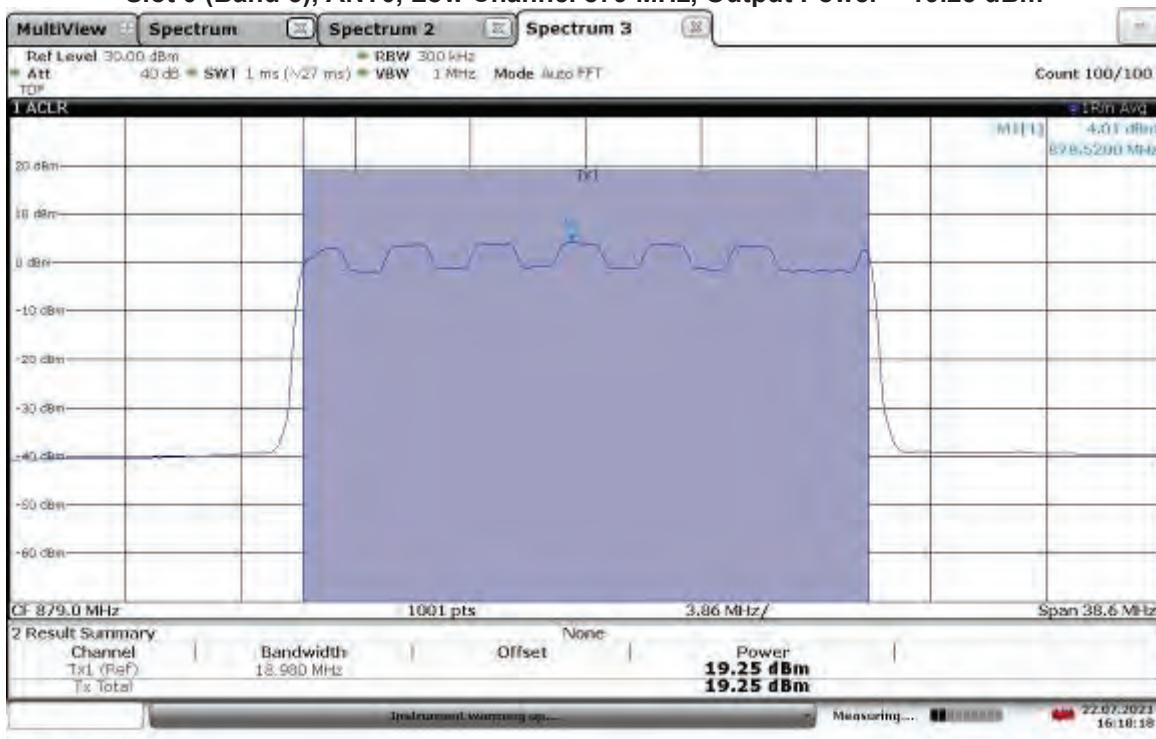


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 879 MHz, Output Power = 19.21 dBm

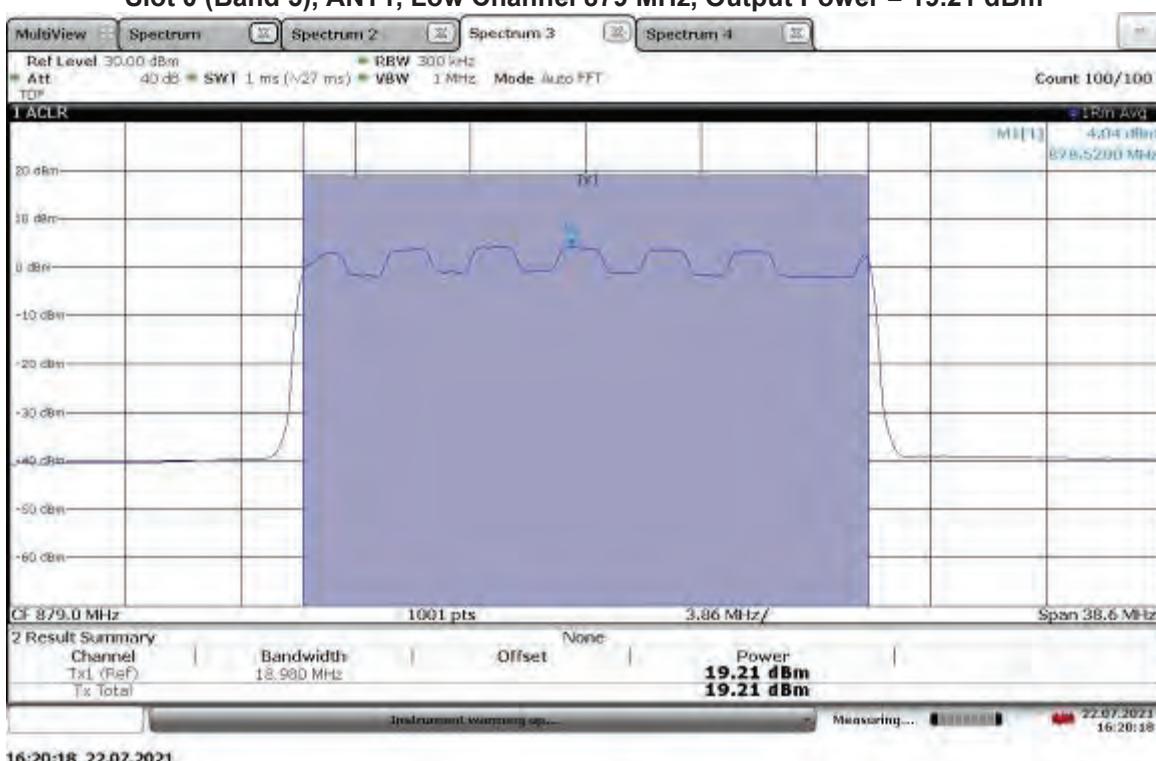


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.87 dBm

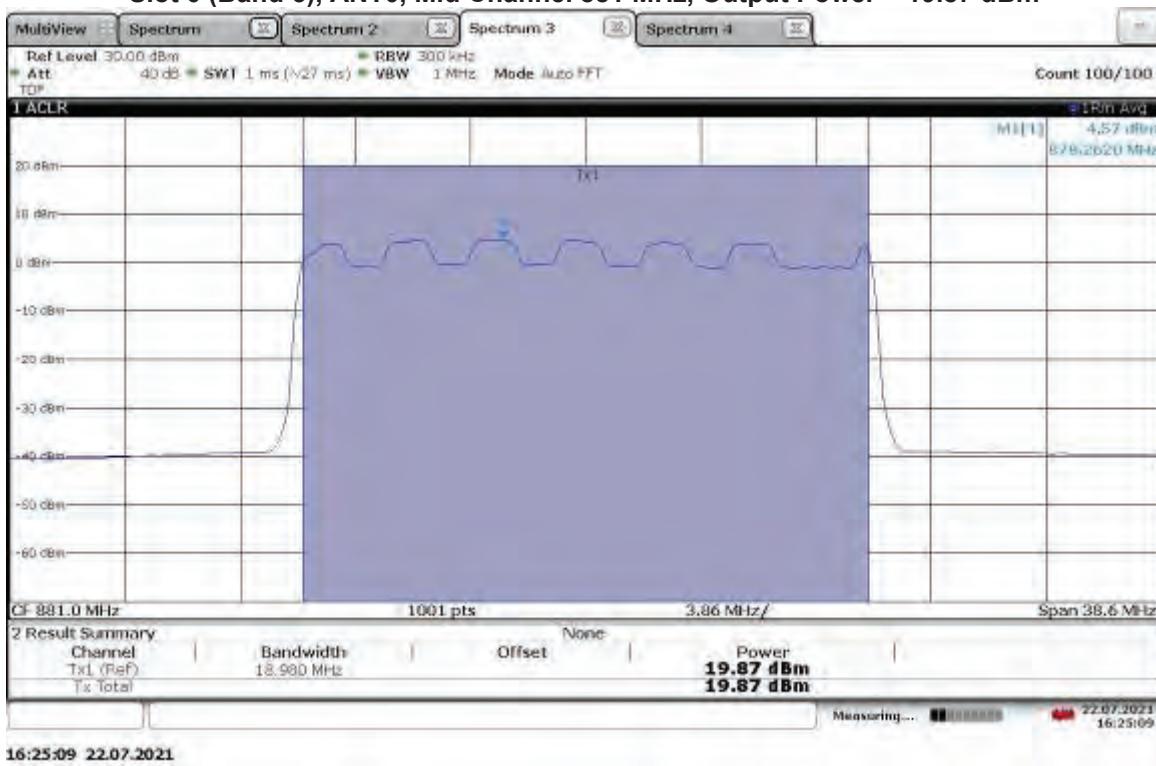


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.69 dBm

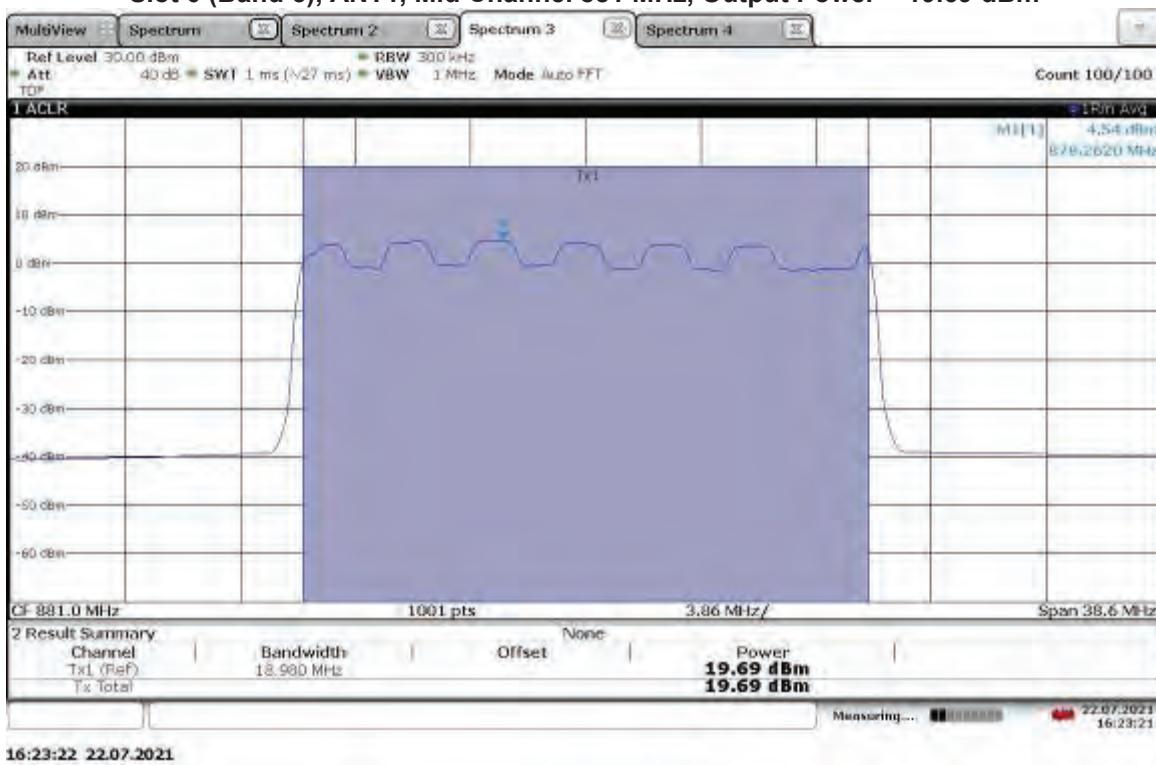


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 884 MHz, Output Power = 20.11 dBm

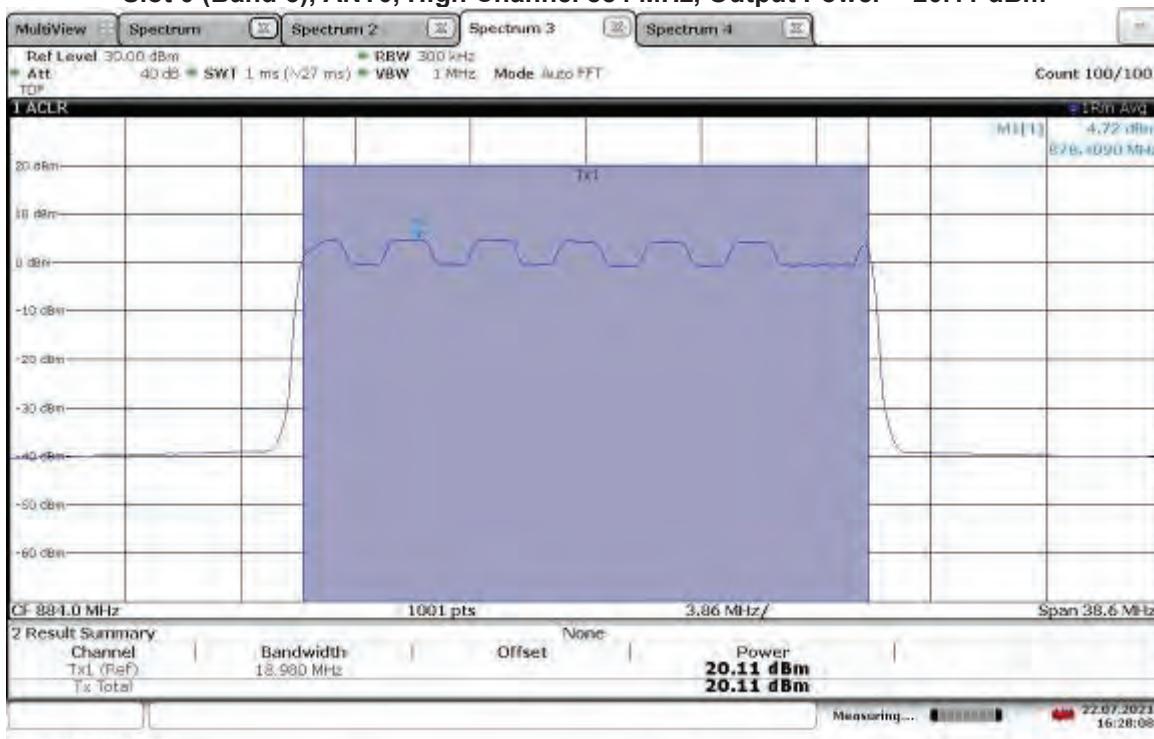


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 884 MHz, Output Power = 19.84 dBm

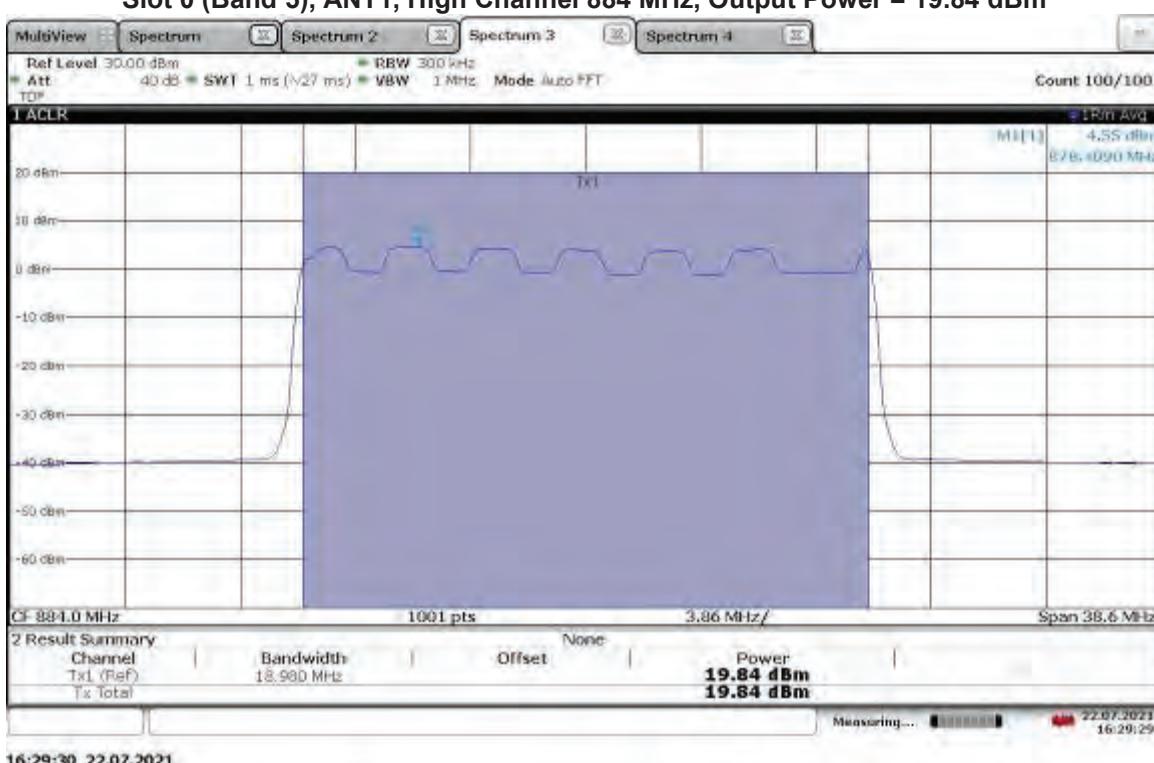


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 871.5 MHz, Output Power = 19.75 dBm

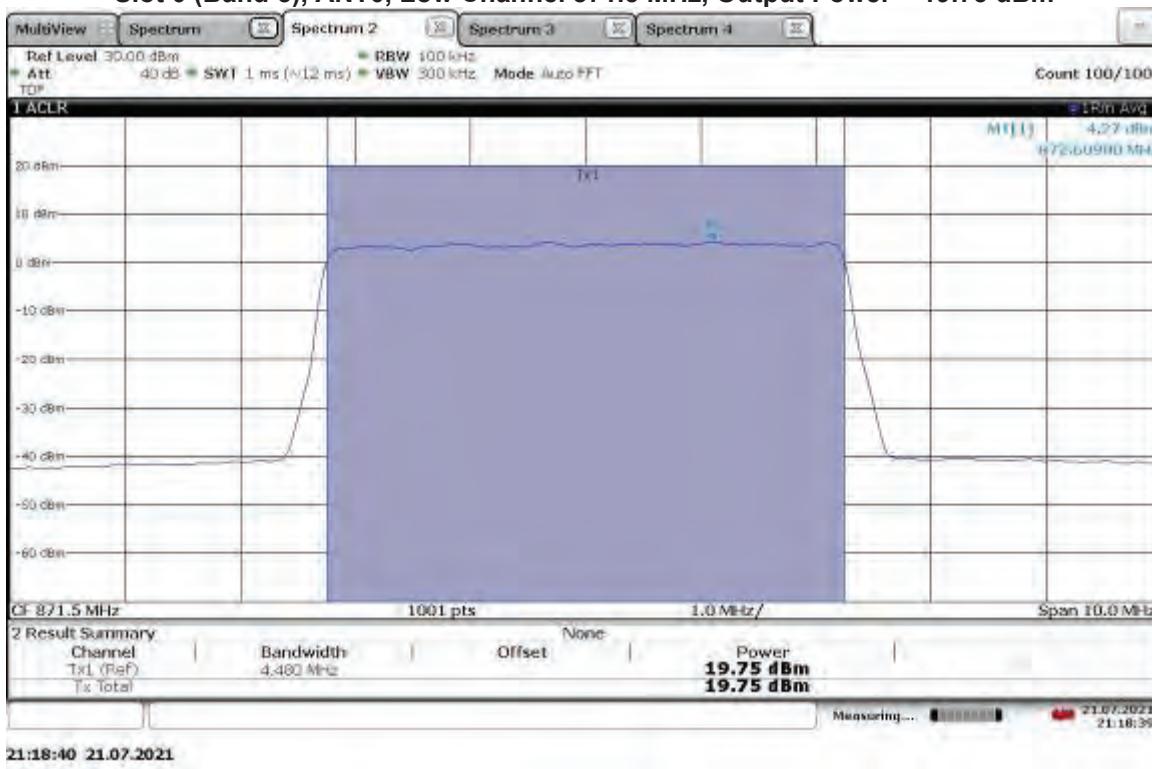


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 871.5 MHz, Output Power = 19.67 dBm

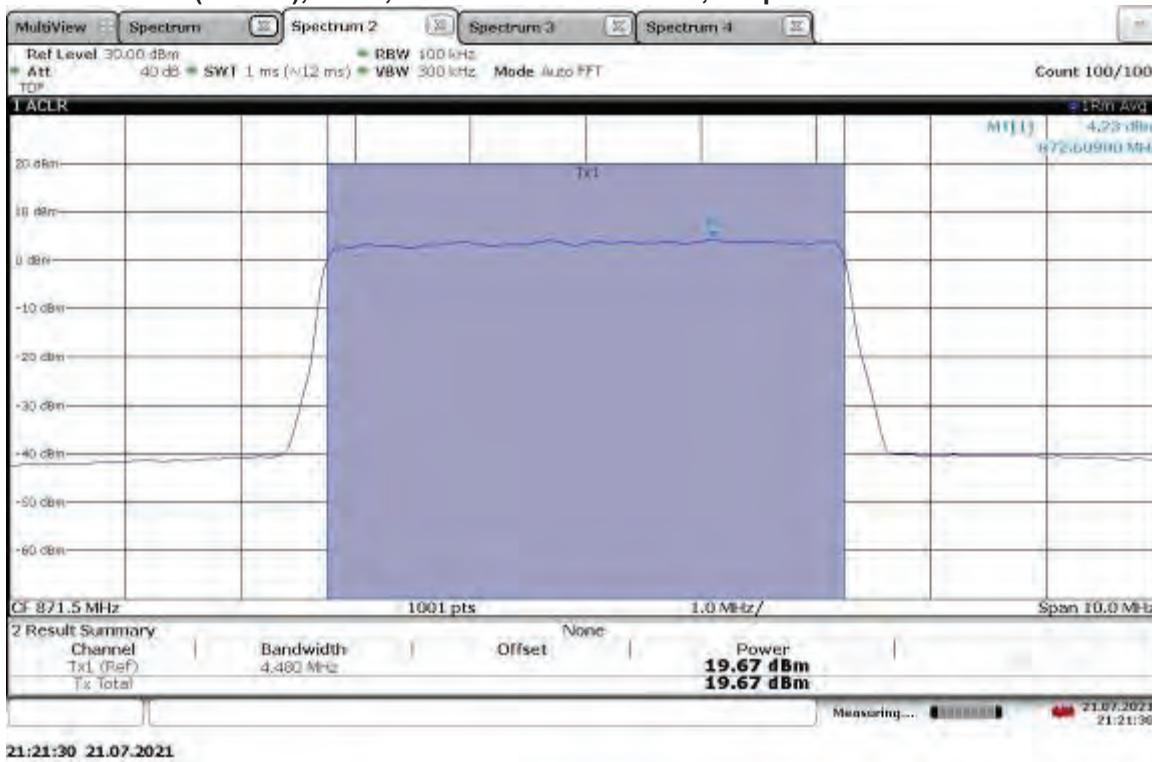


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.98 dBm

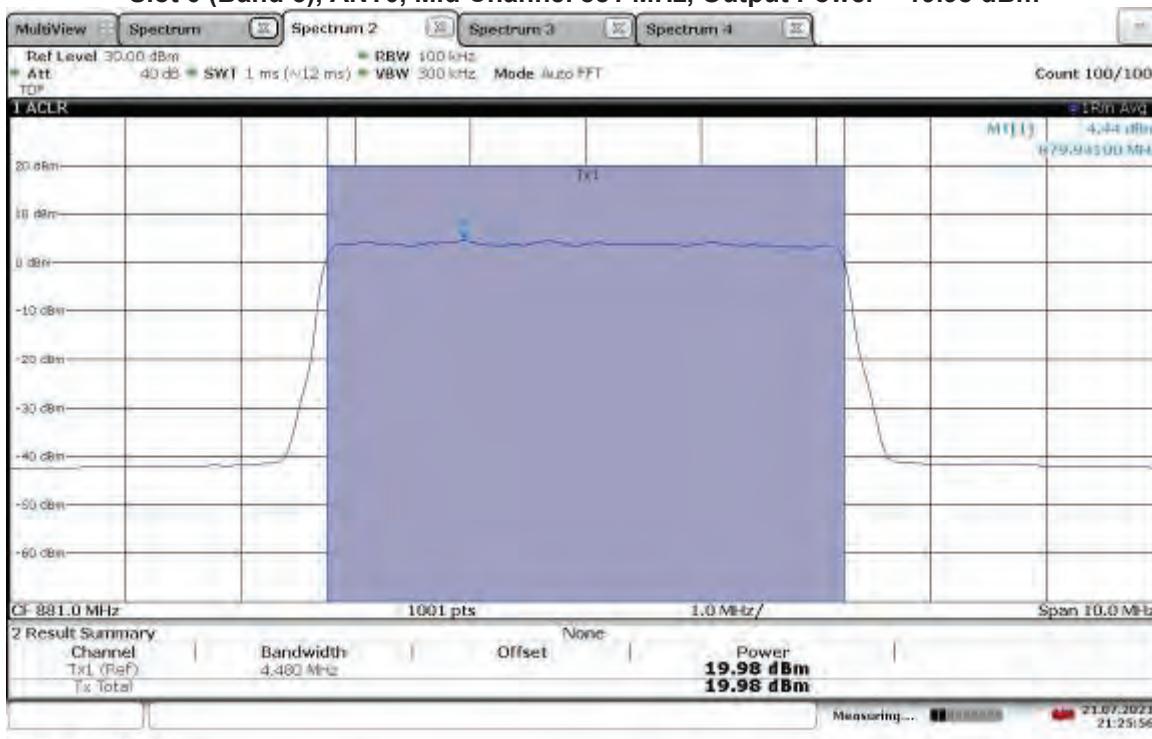


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.68 dBm

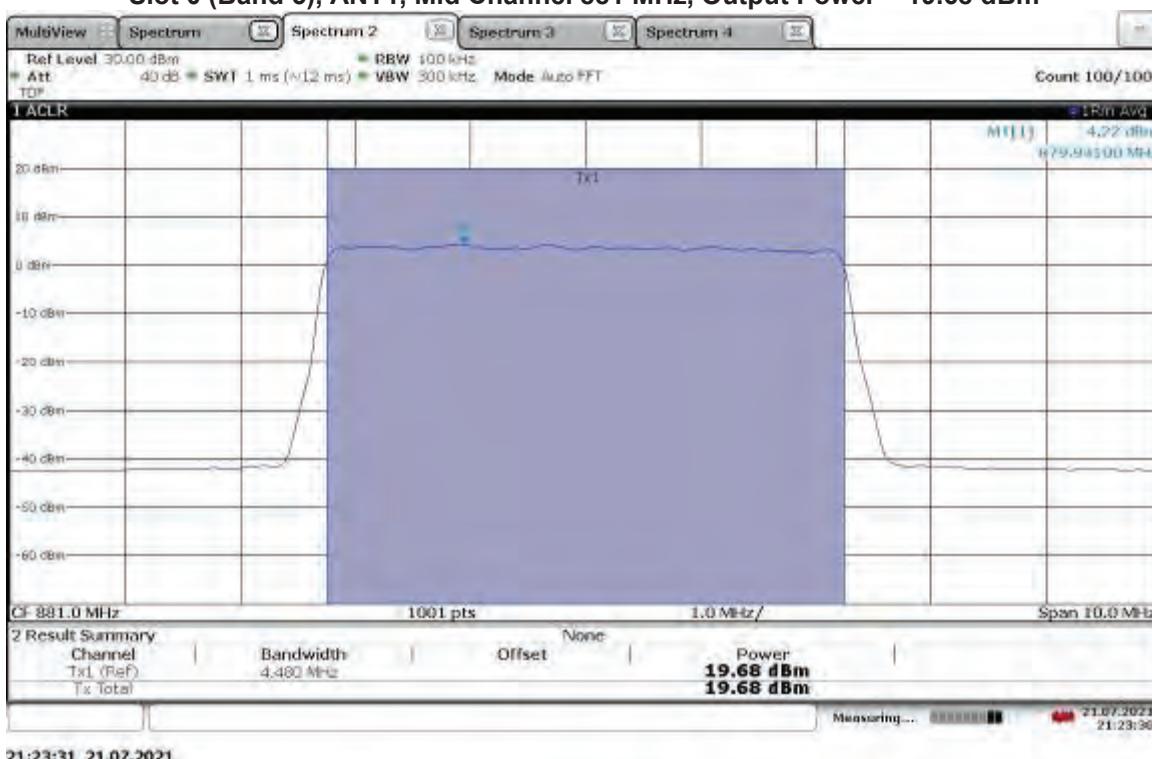


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 891.5 MHz, Output Power = 20.03 dBm

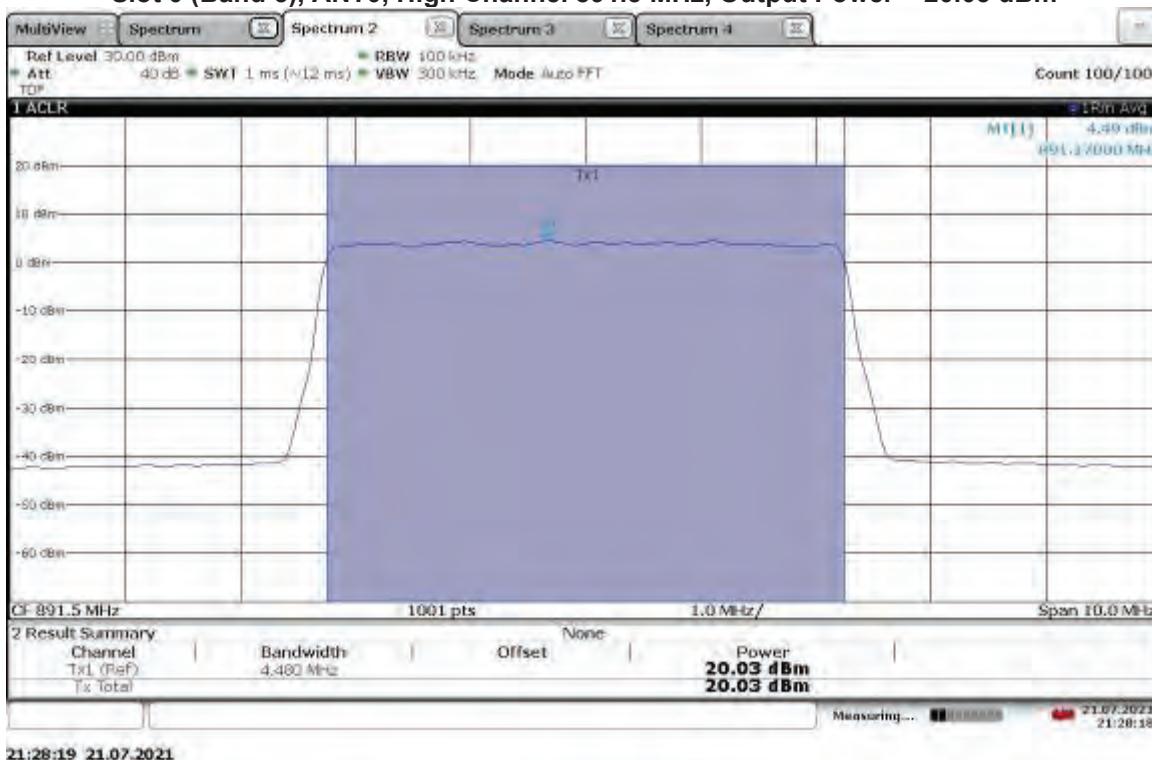


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 891.5 MHz, Output Power = 19.85 dBm

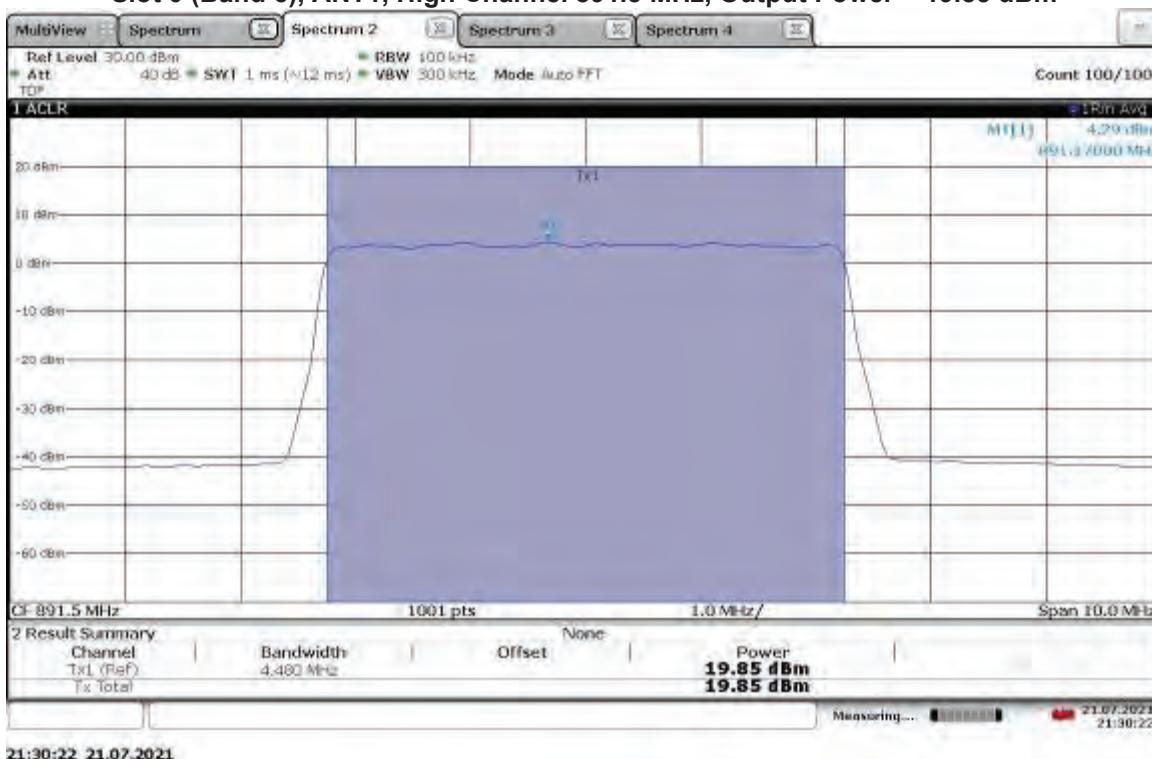


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 874 MHz, Output Power = 20.01 dBm

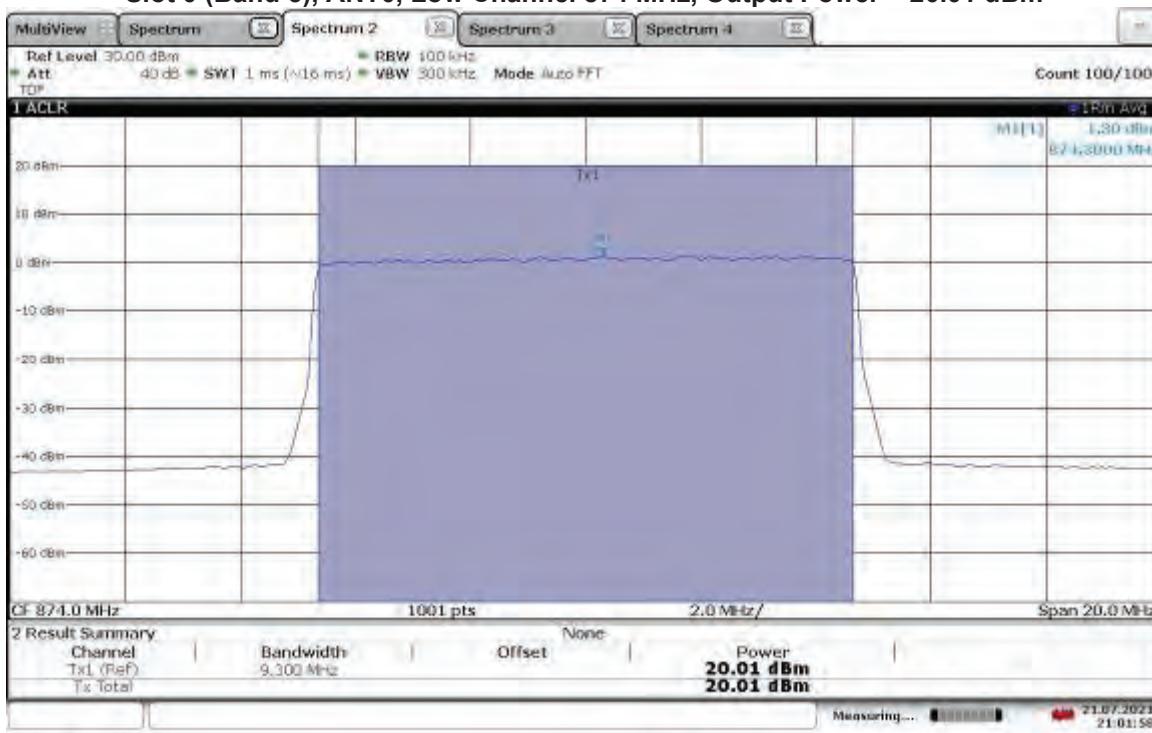


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 874 MHz, Output Power = 19.97 dBm

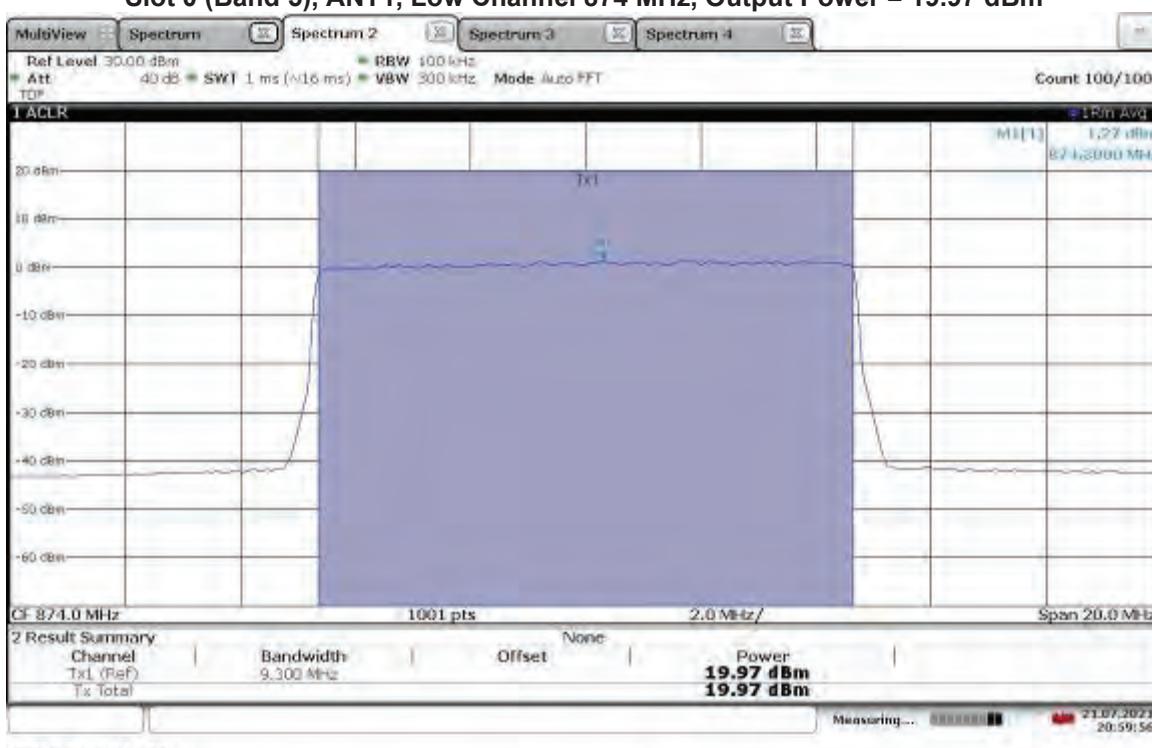


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.90 dBm

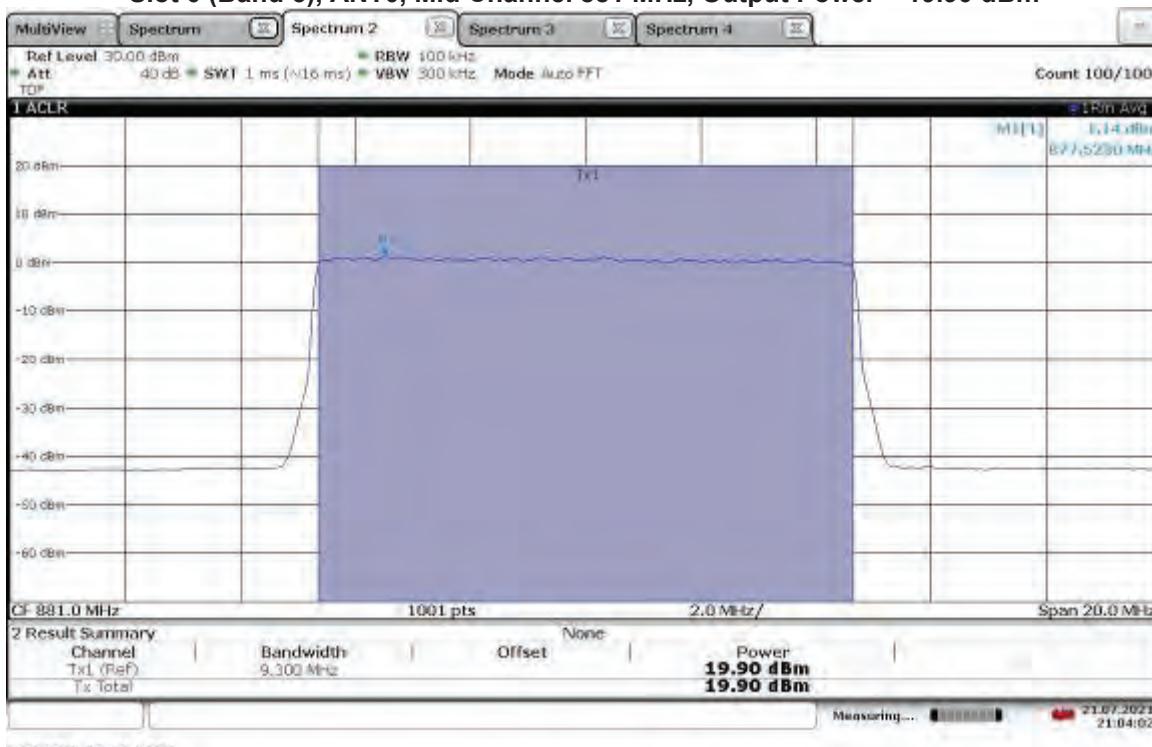


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.60 dBm

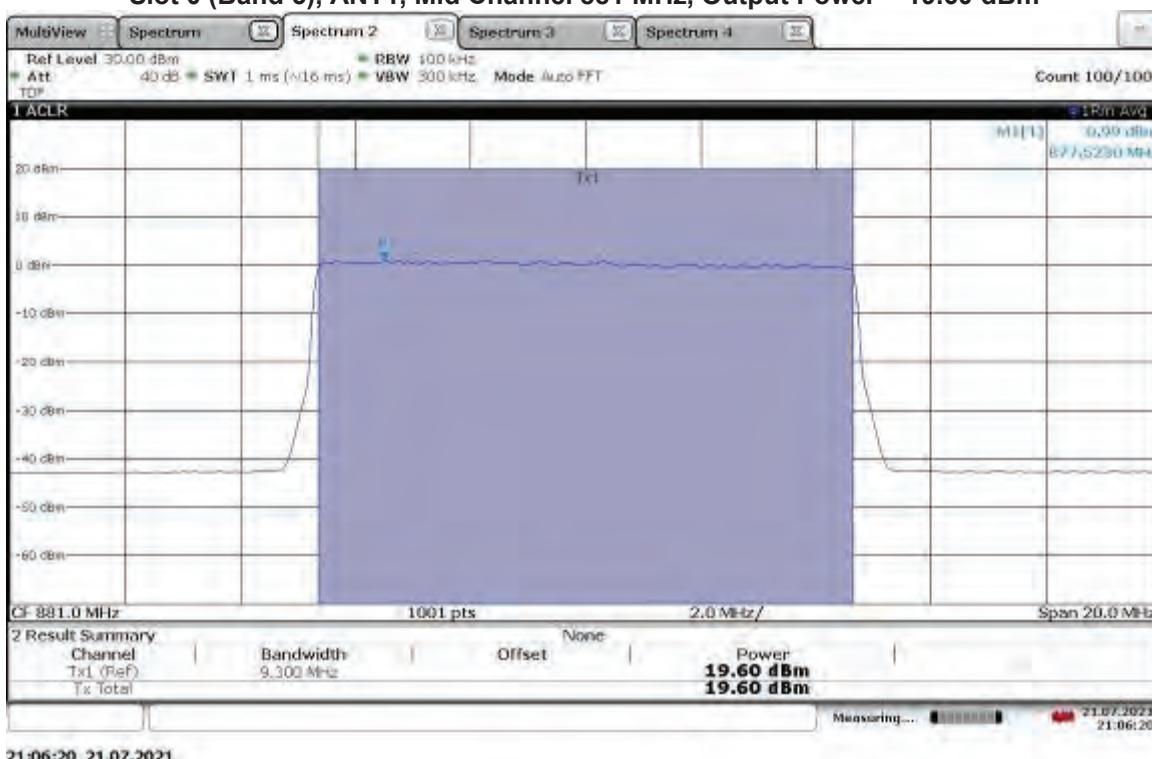

TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 889 MHz, Output Power = 19.84 dBm

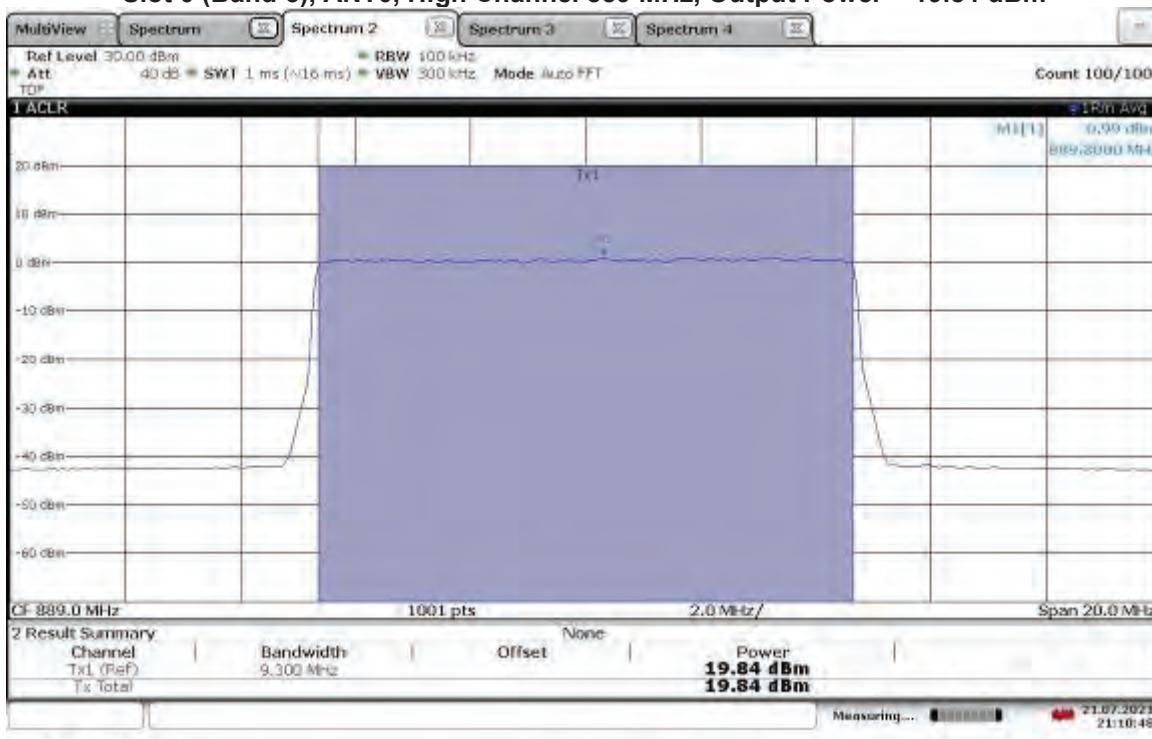


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 889 MHz, Output Power = 19.59 dBm

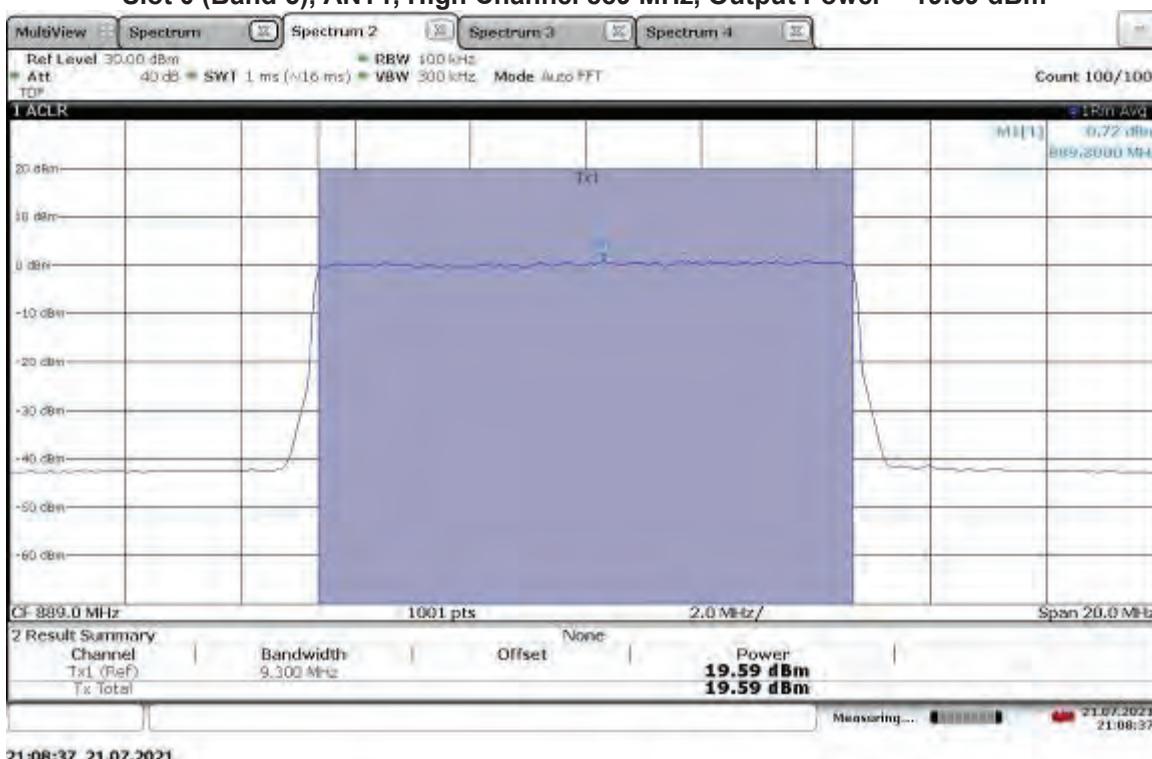


TM3.1-64QAM_15 MHz Bandwidth

Slot 0 (Band 5), ANT0, Low Channel 876.5 MHz, Output Power = 19.96 dBm

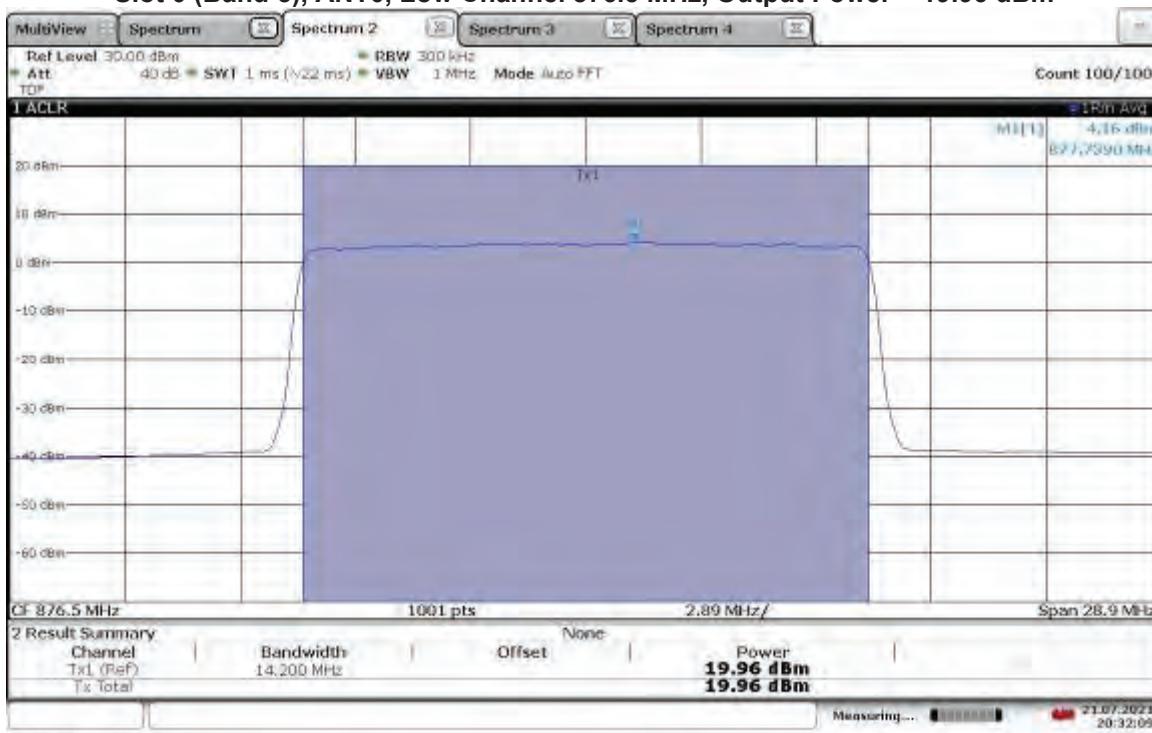


TM3.1-64QAM_15 MHz Bandwidth


Slot 0 (Band 5), ANT1, Low Channel 876.5 MHz, Output Power = 19.82 dBm

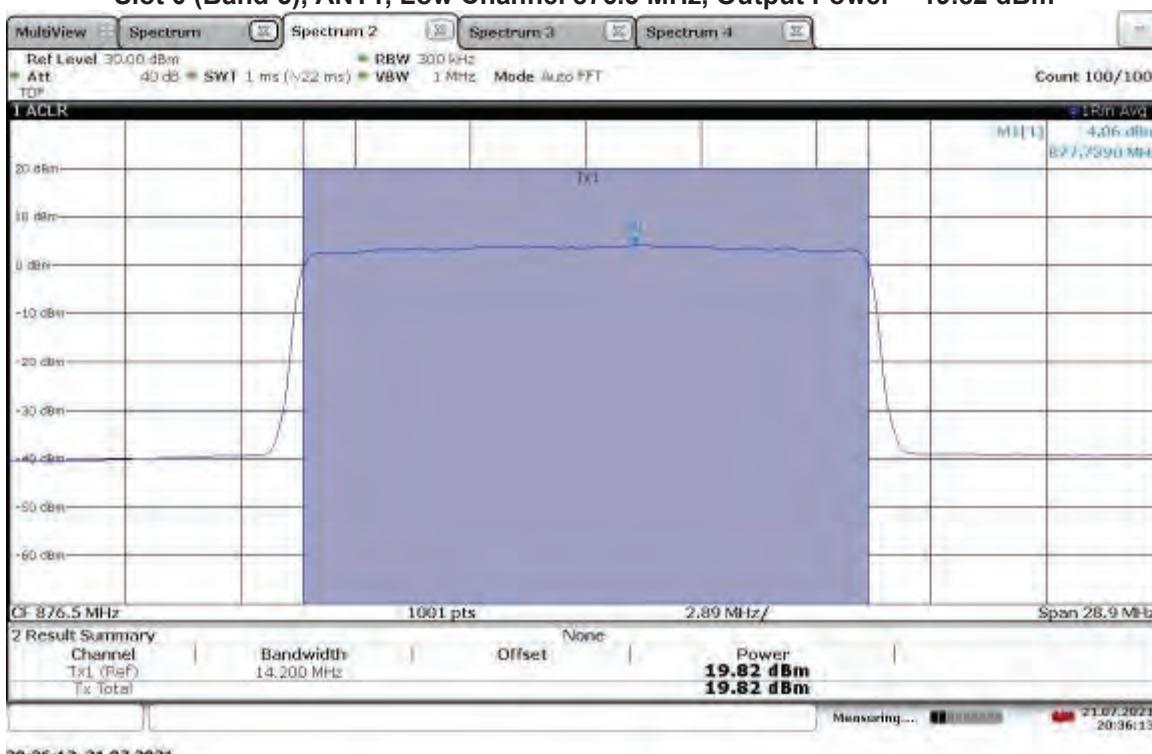


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.79 dBm

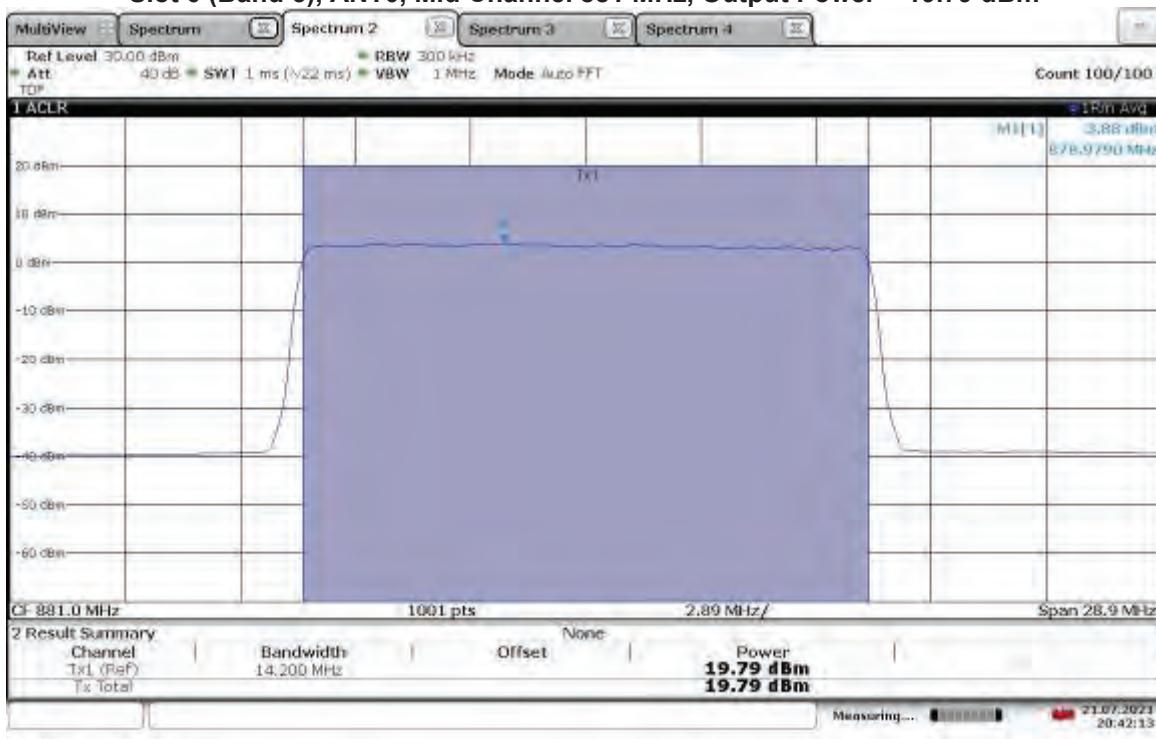


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.54 dBm

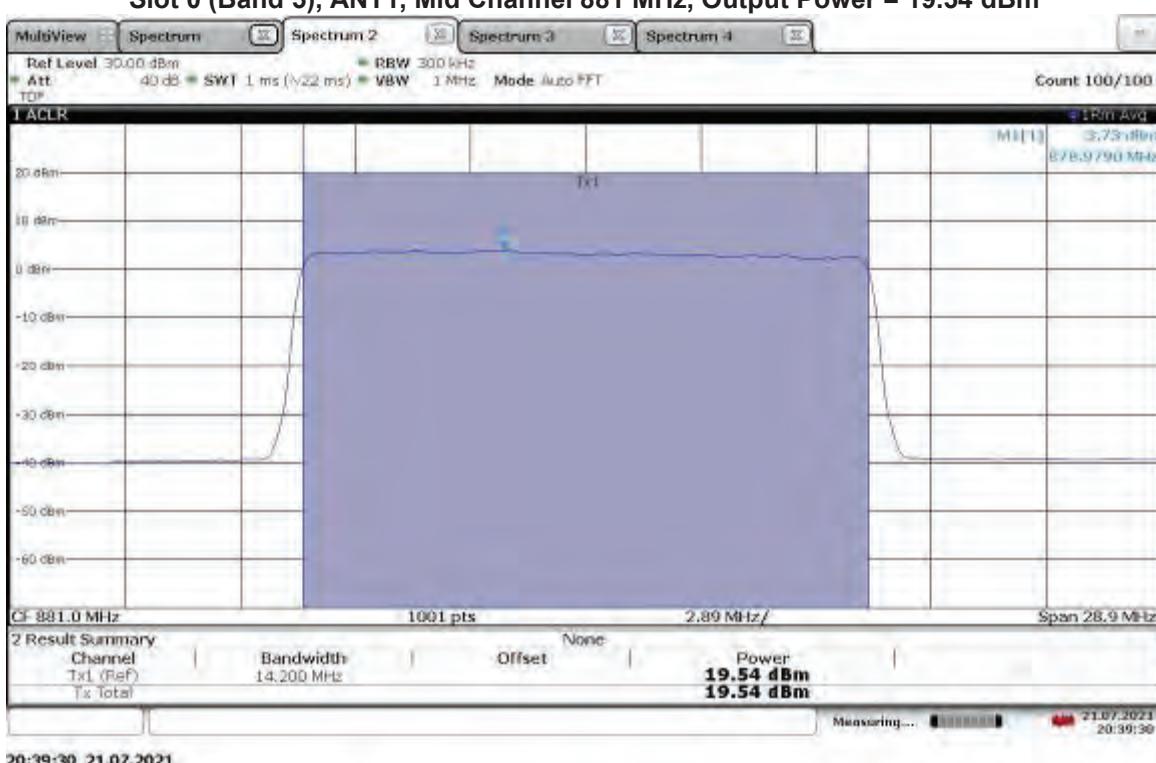


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 886.5 MHz, Output Power = 19.84 dBm

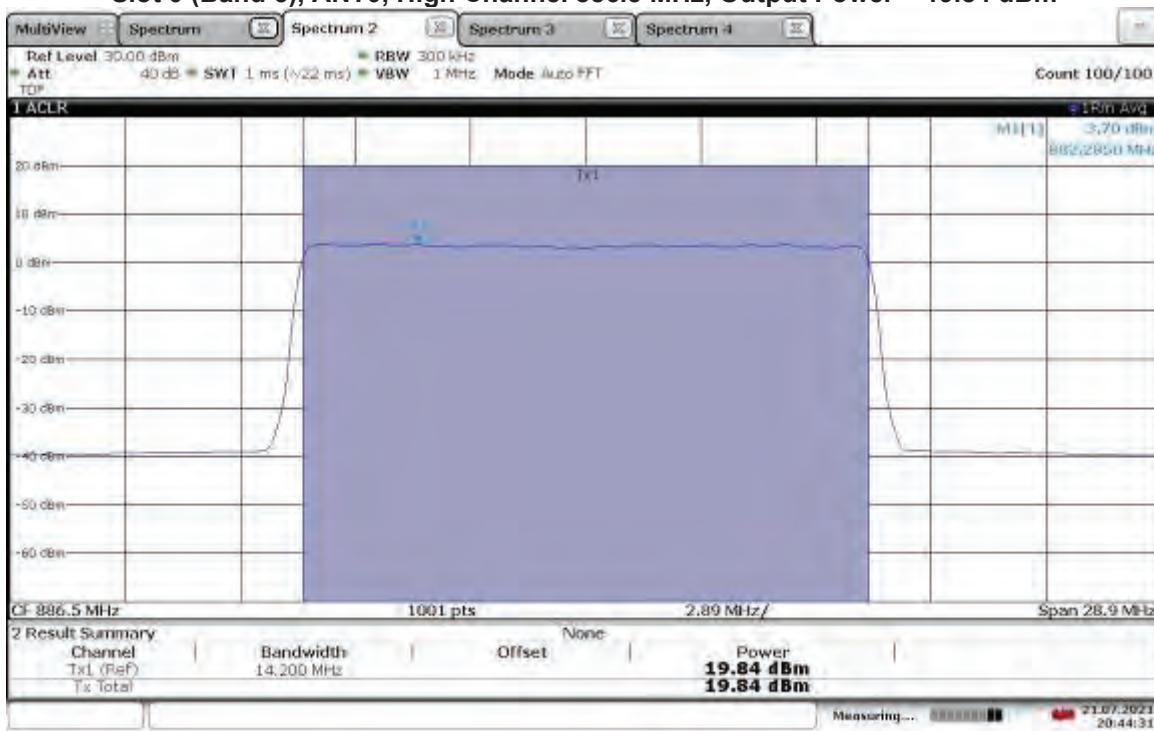


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, Output Power = 19.53 dBm

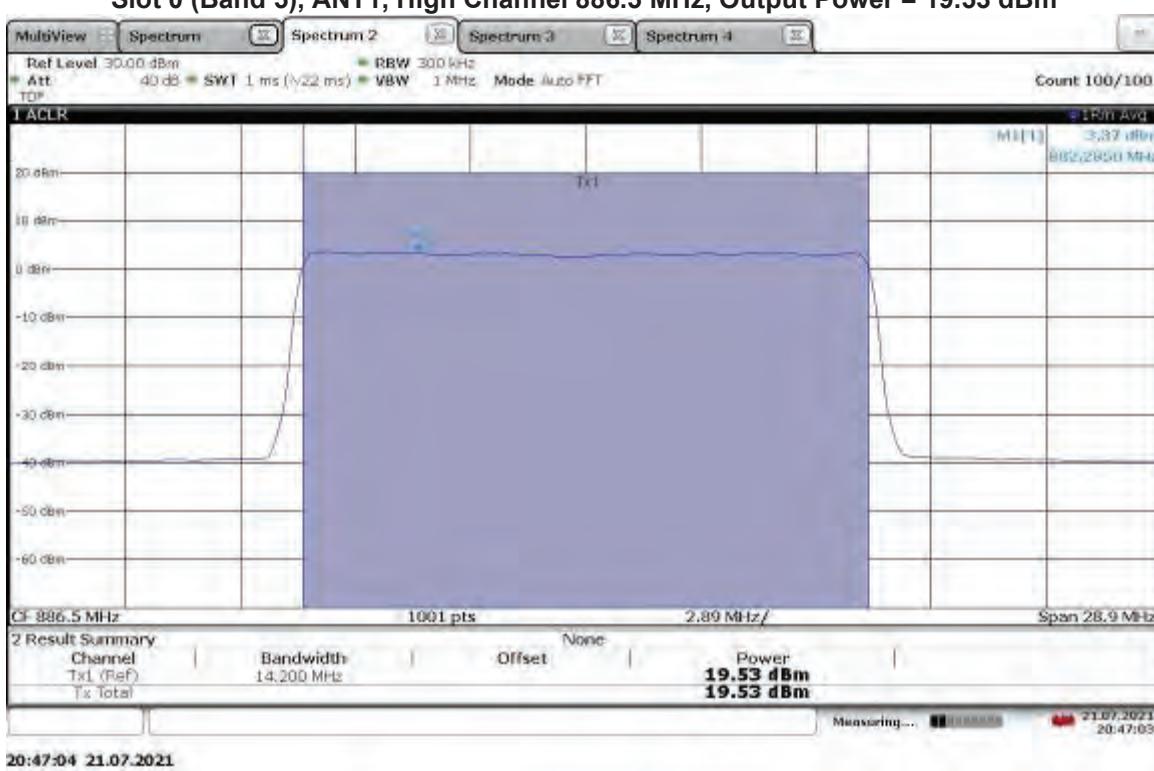


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 879 MHz, Output Power = 19.68 dBm

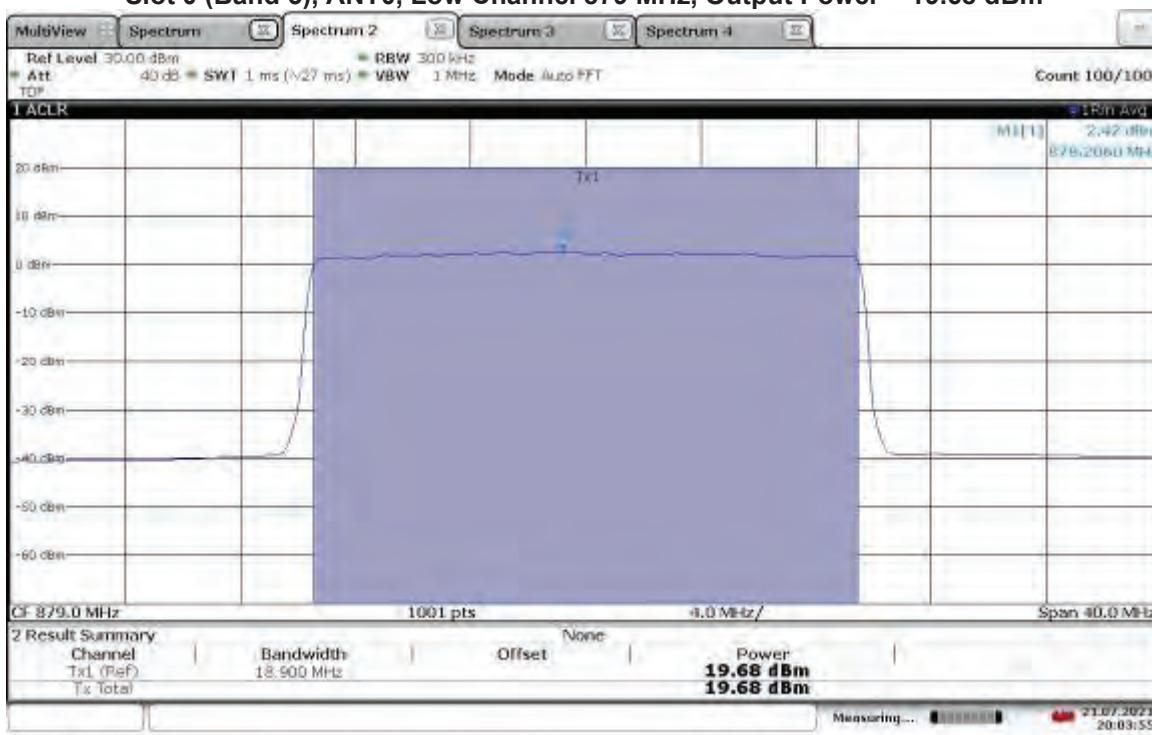


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 0), ANT1, Low Channel 879 MHz, Output Power = 19.73 dBm

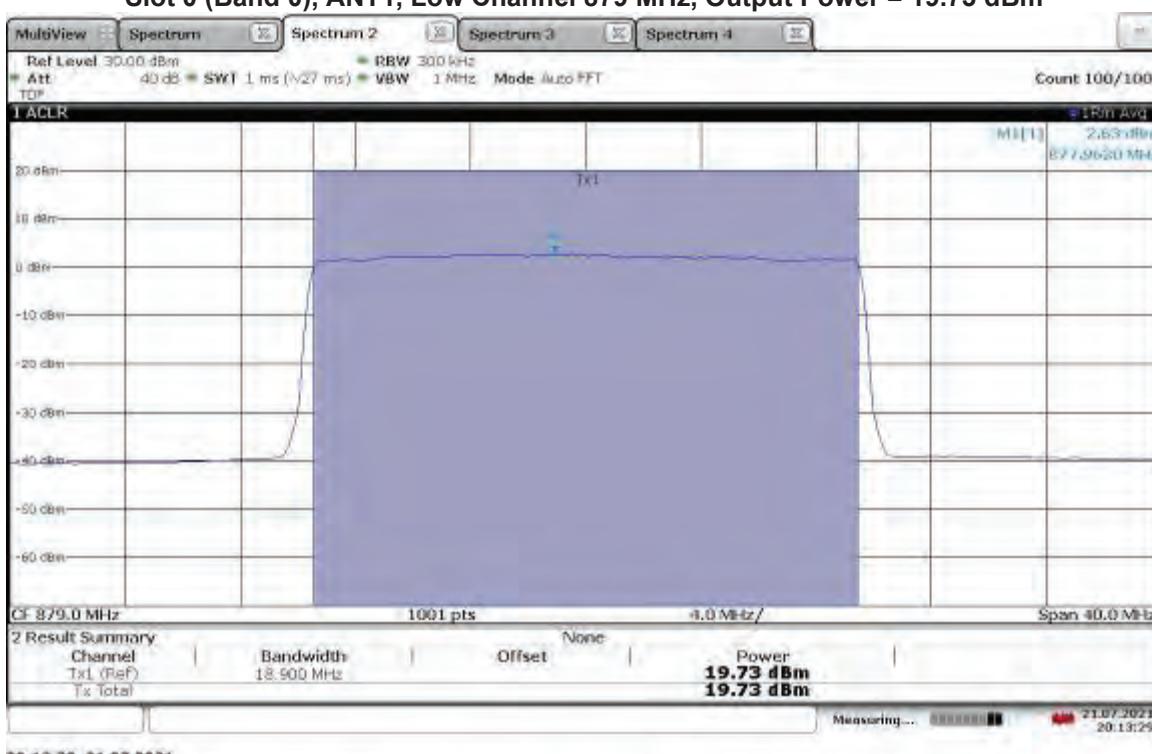


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 0), ANT0, Mid Channel 881 MHz, Output Power = 19.74 dBm

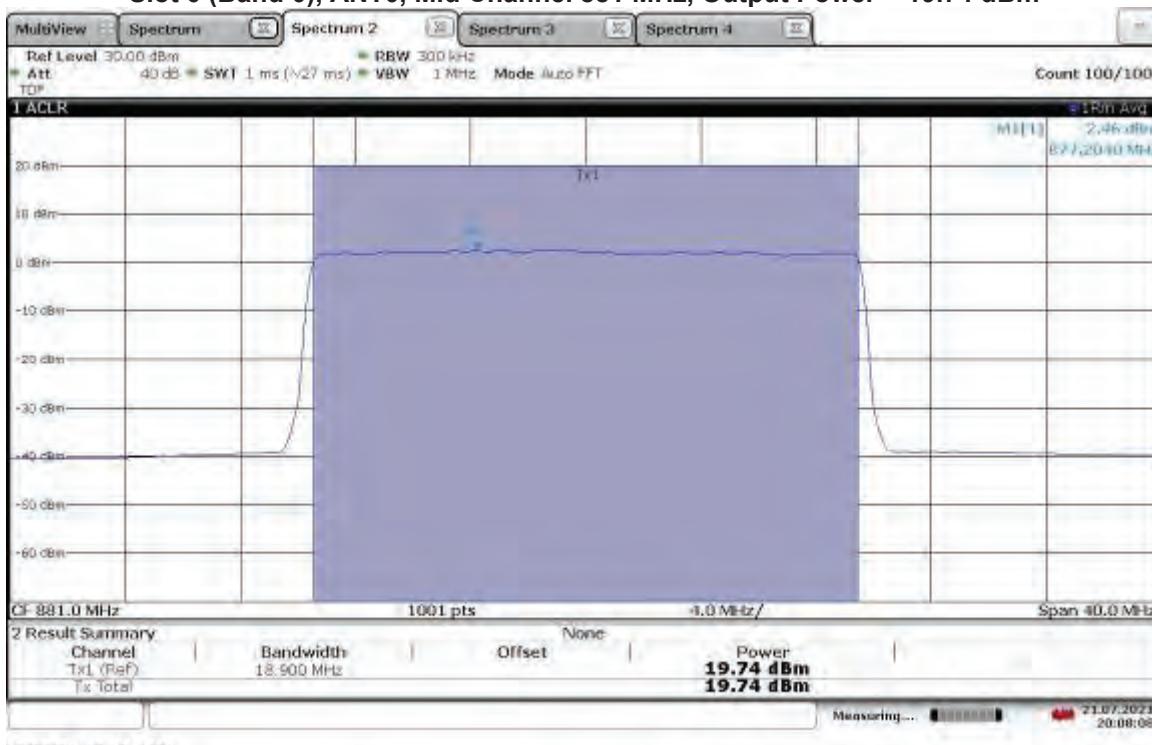


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.47 dBm

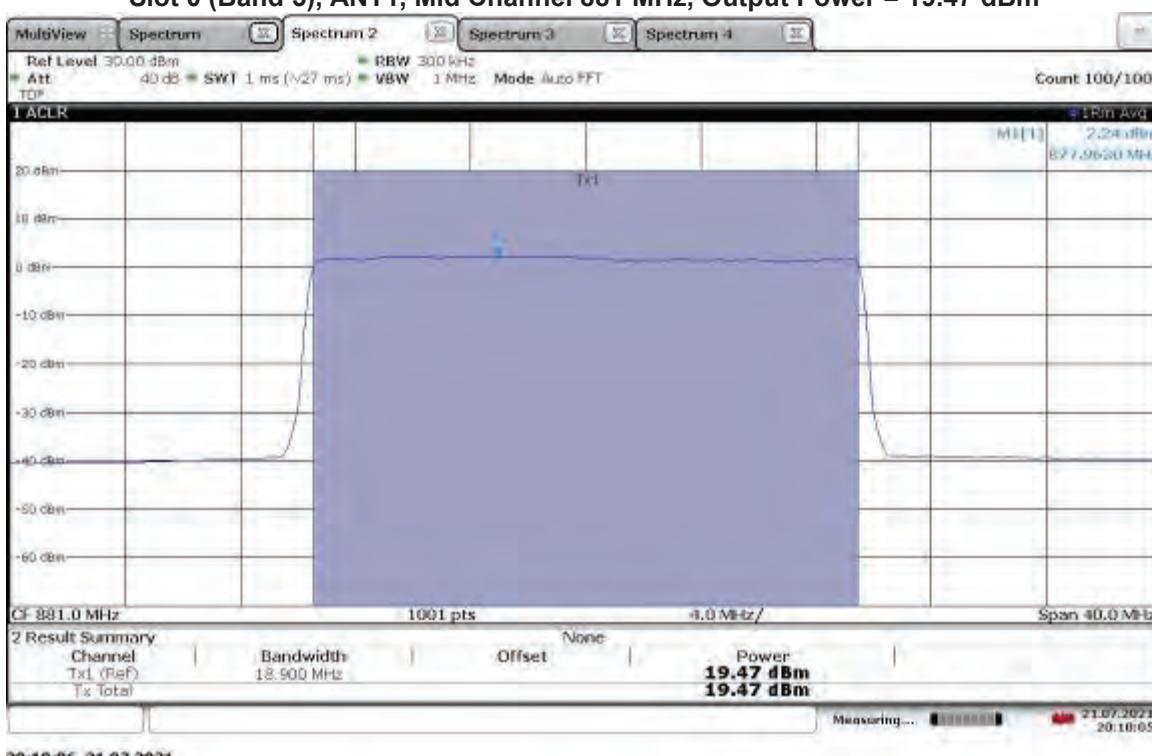


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 884 MHz, Output Power = 19.93 dBm

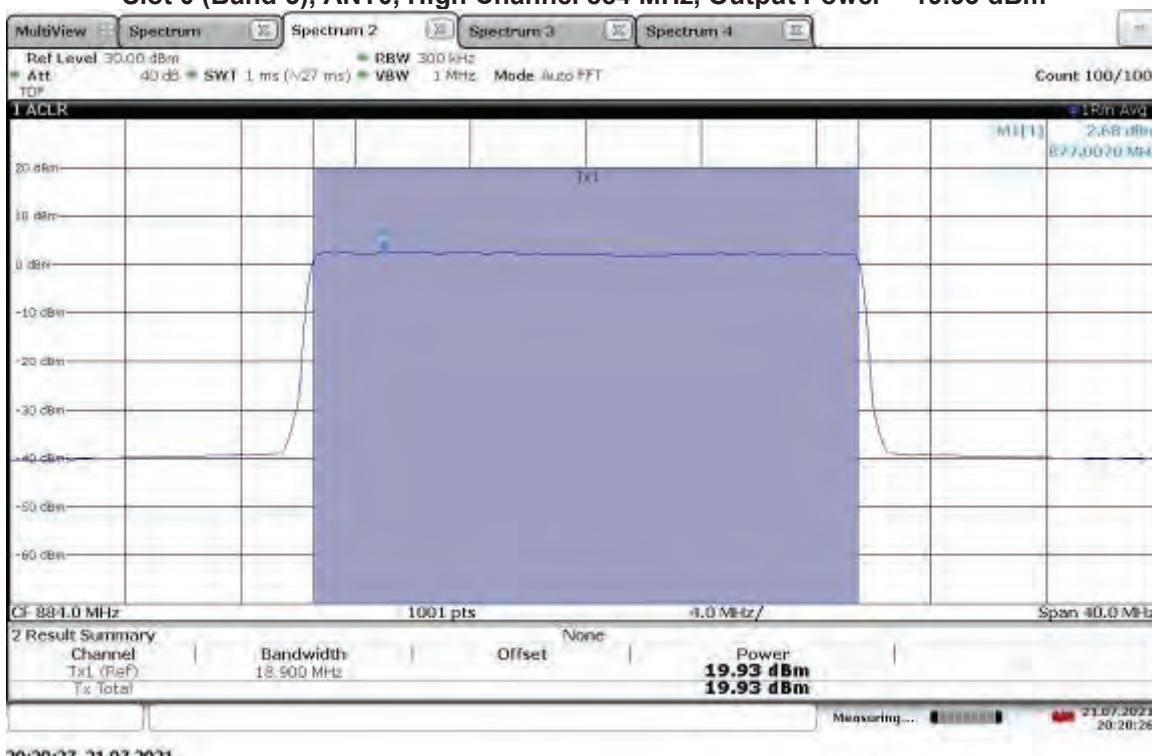


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 884 MHz, Output Power = 19.74 dBm

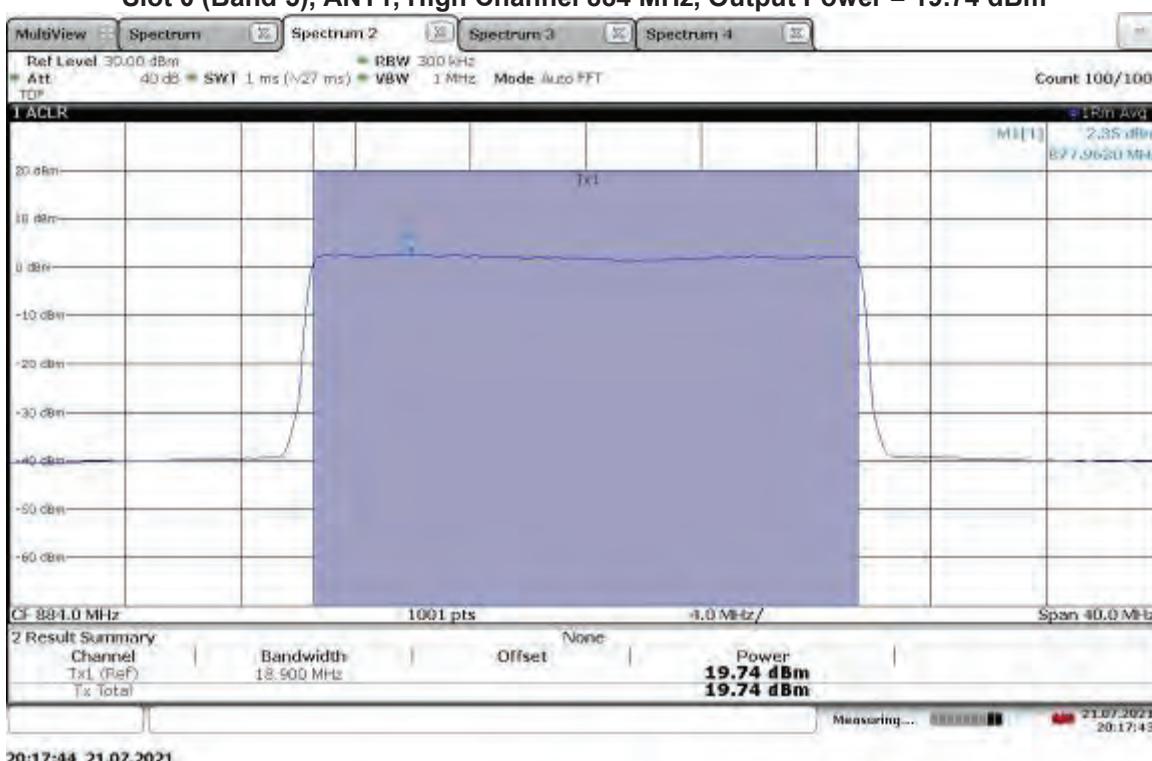


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 871.5 MHz, Output Power = 19.75 dBm

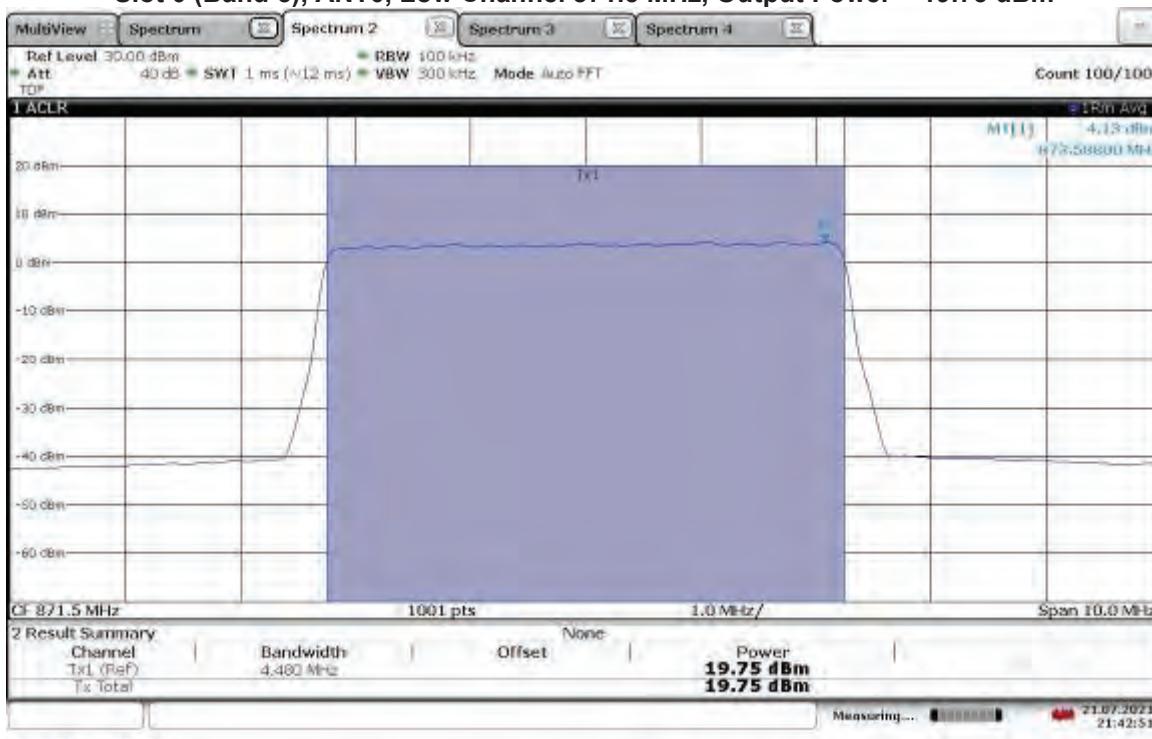


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 871.5 MHz, Output Power = 19.69 dBm

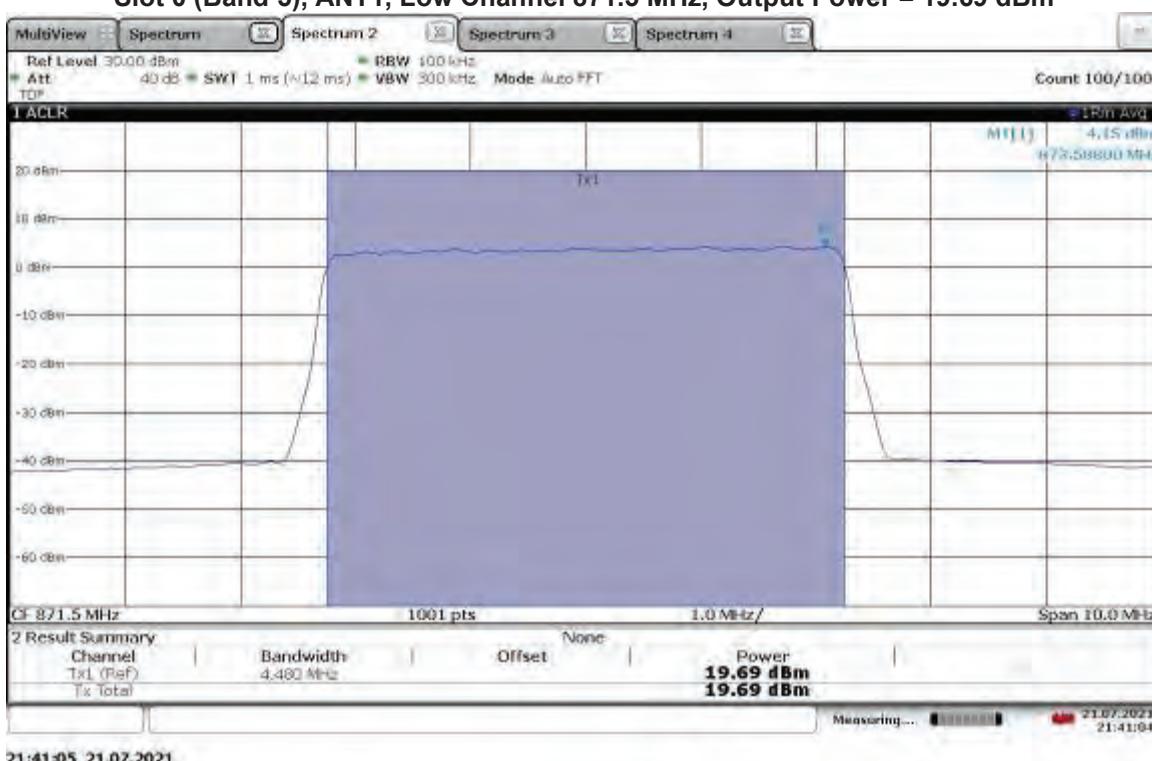


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.99 dBm

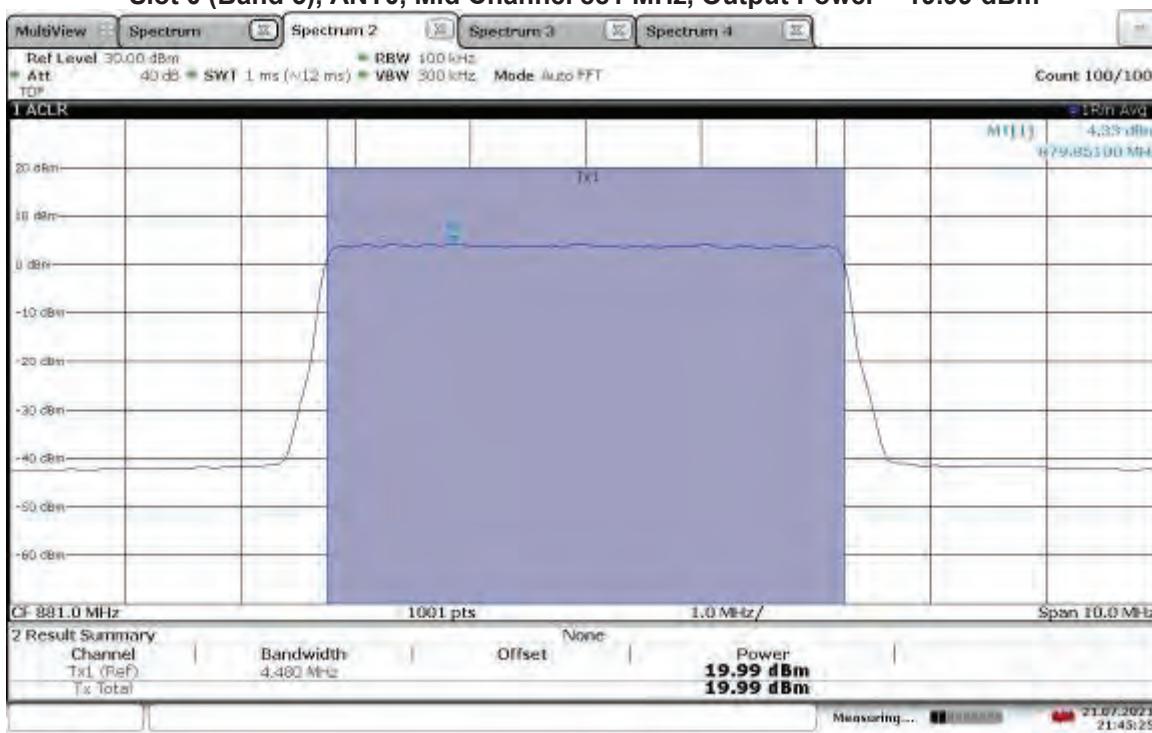


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.69 dBm

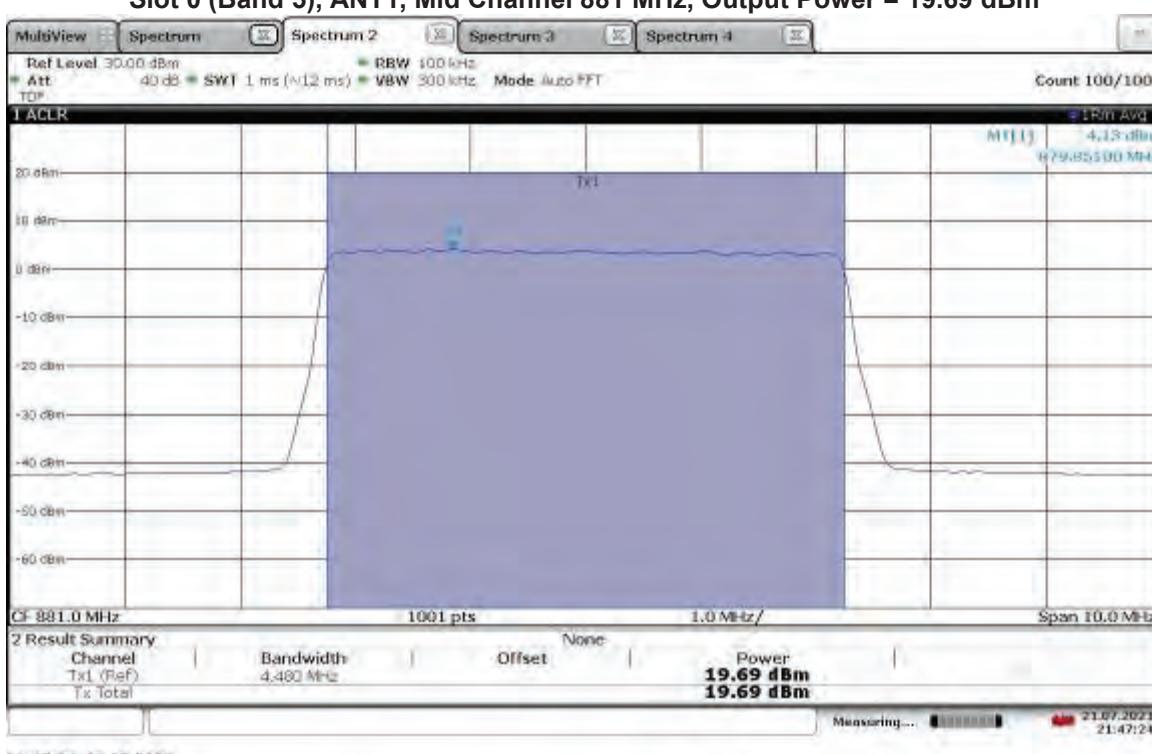


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 891.5 MHz, Output Power = 20.02 dBm

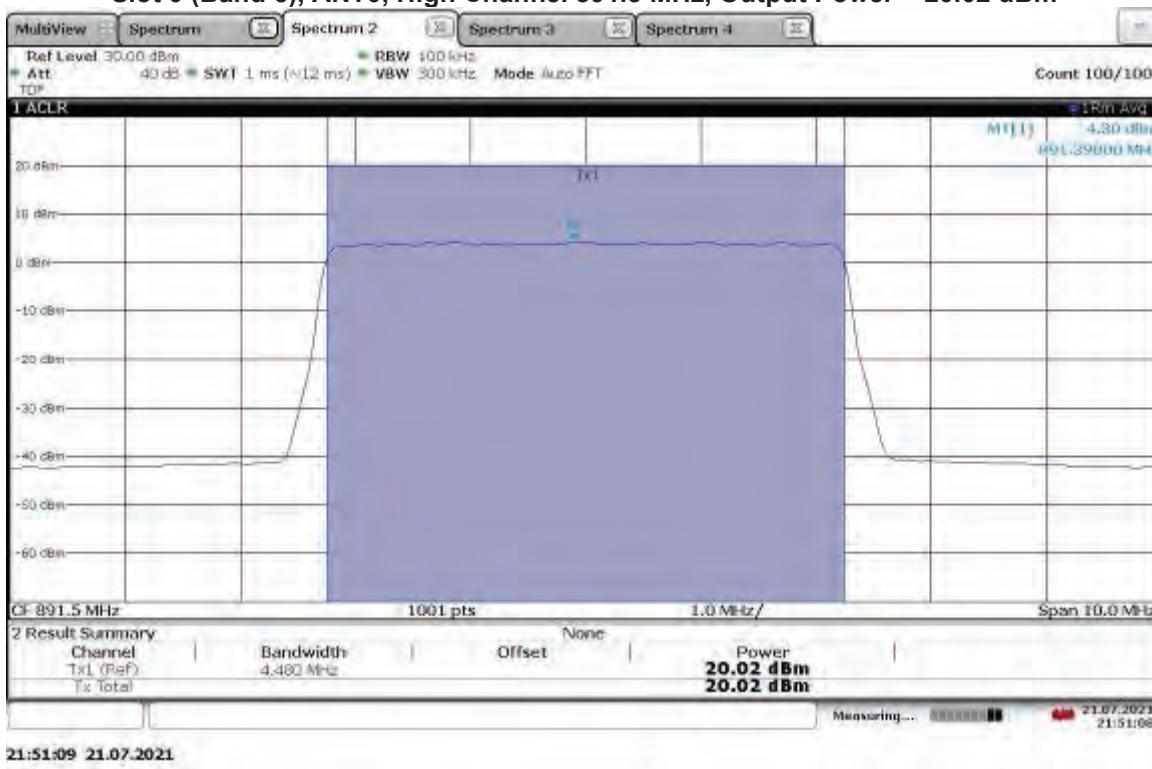


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 891.5 MHz, Output Power = 19.86 dBm

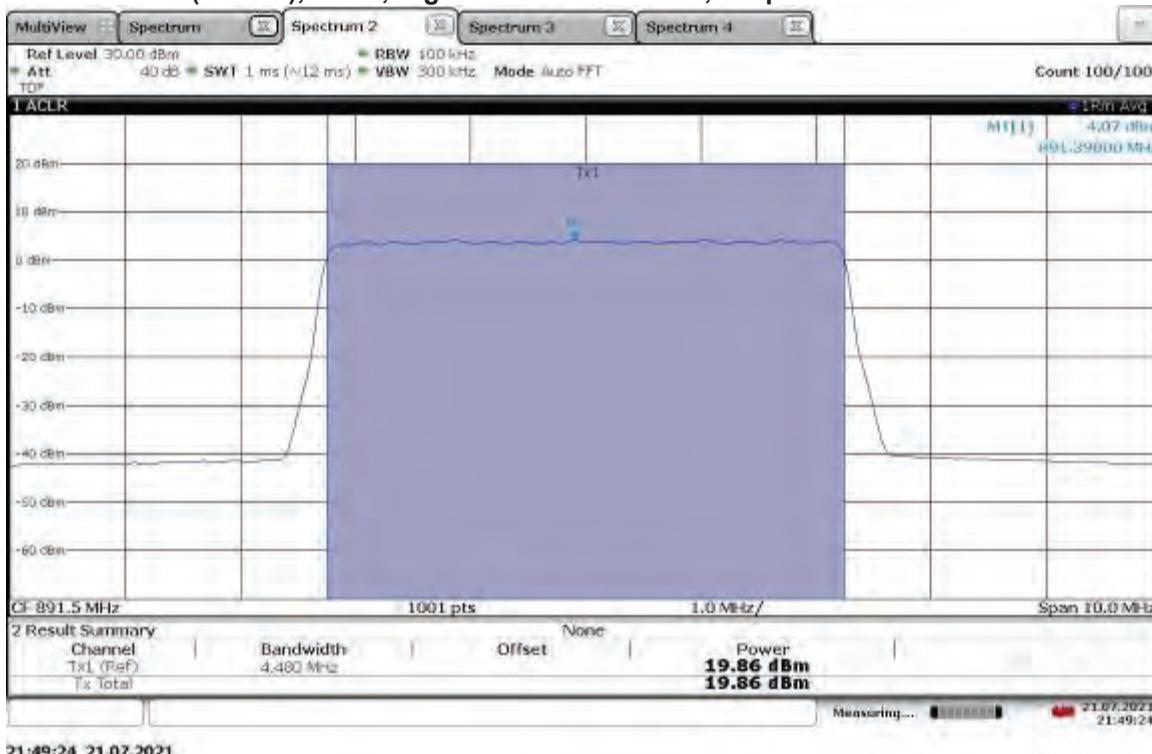


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 874 MHz, Output Power = 20.08 dBm

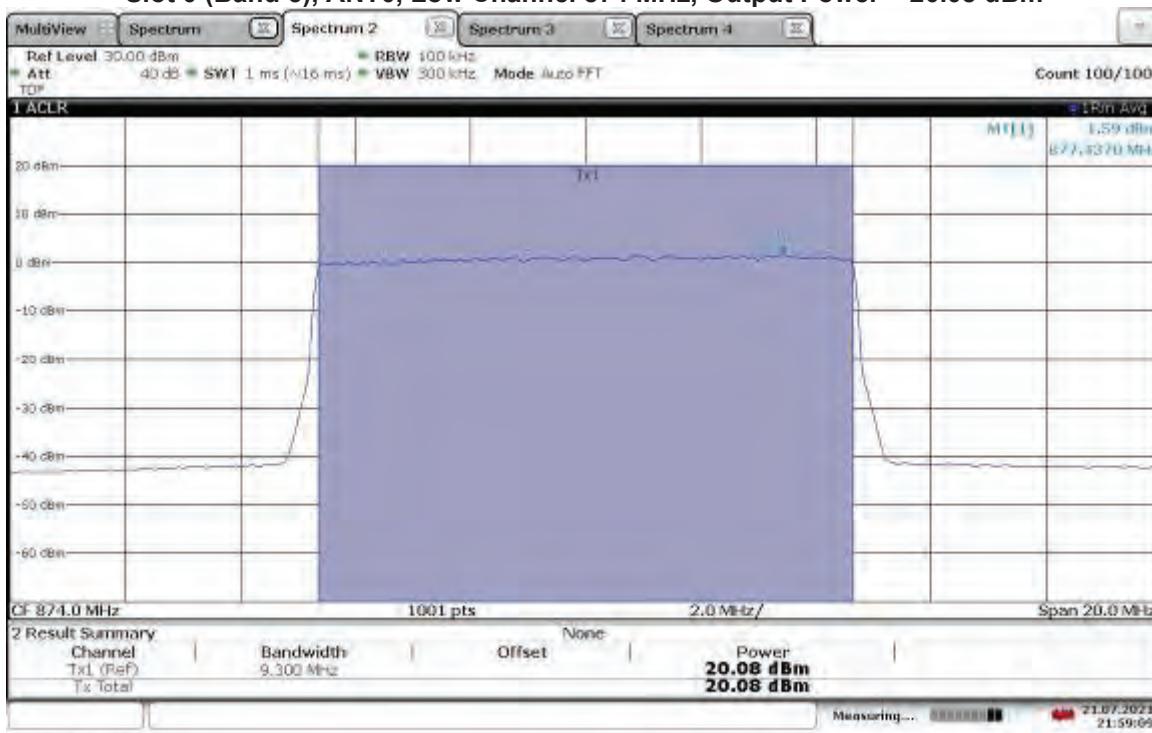


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 874 MHz, Output Power = 20.01 dBm

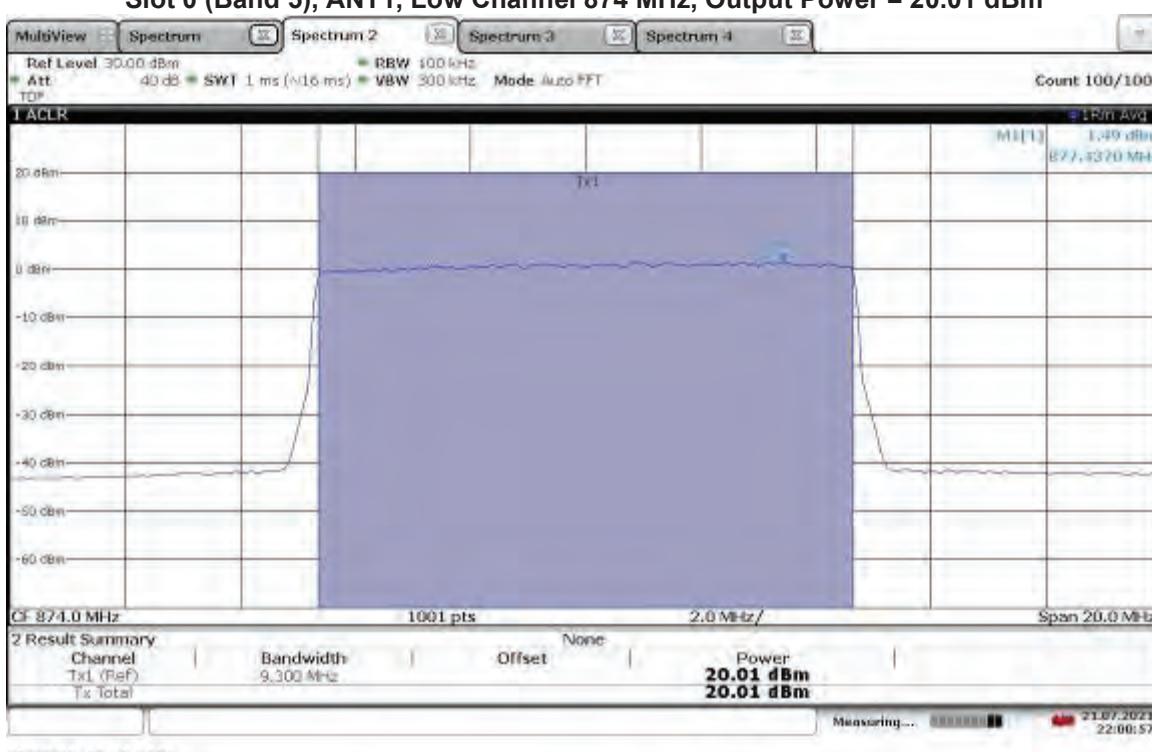


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.94 dBm

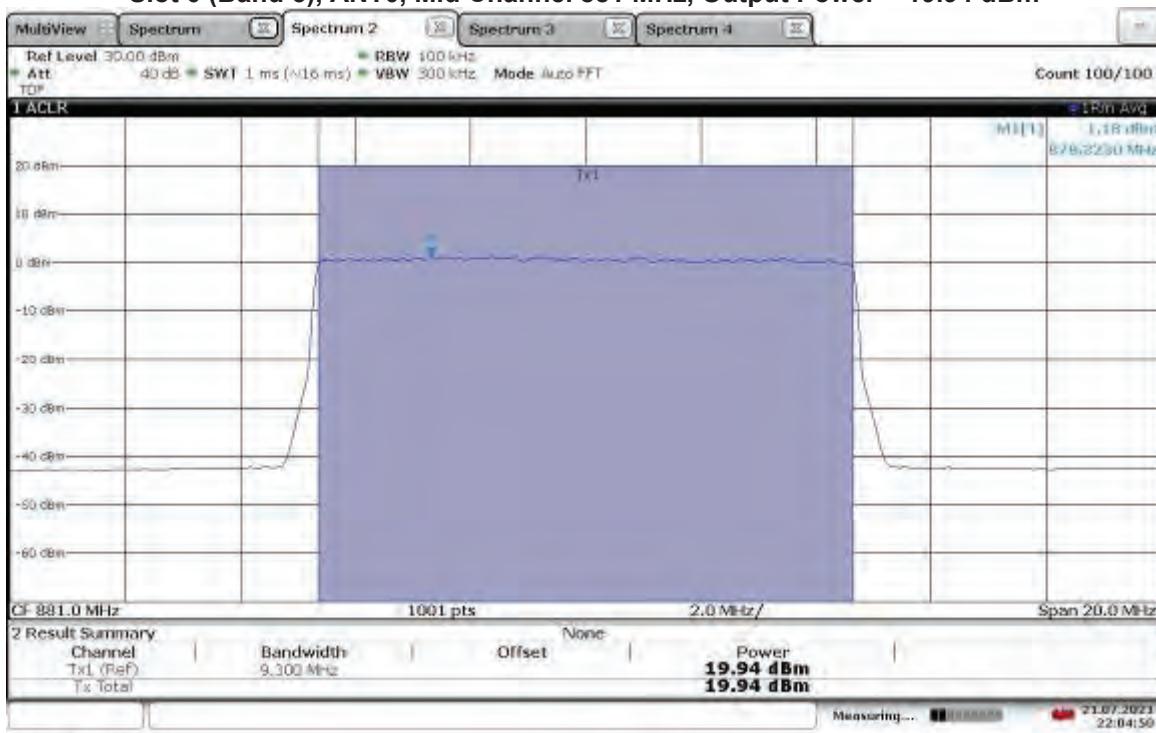


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.66 dBm

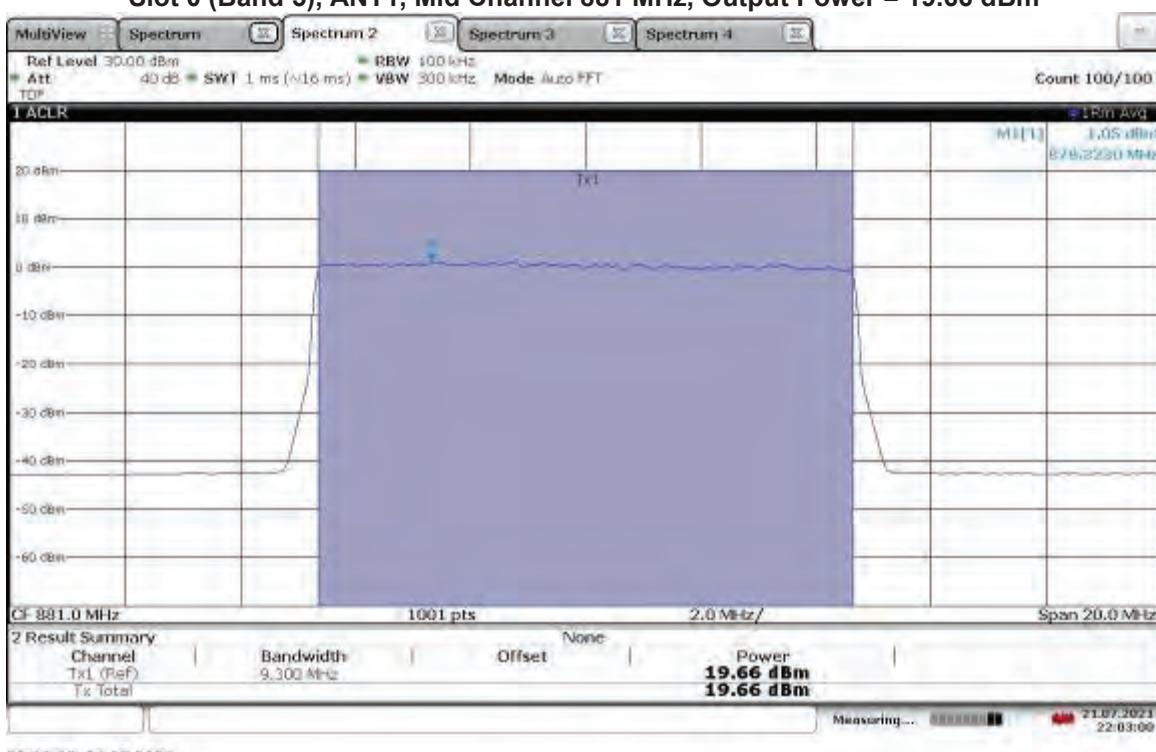


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 889 MHz, Output Power = 19.90 dBm

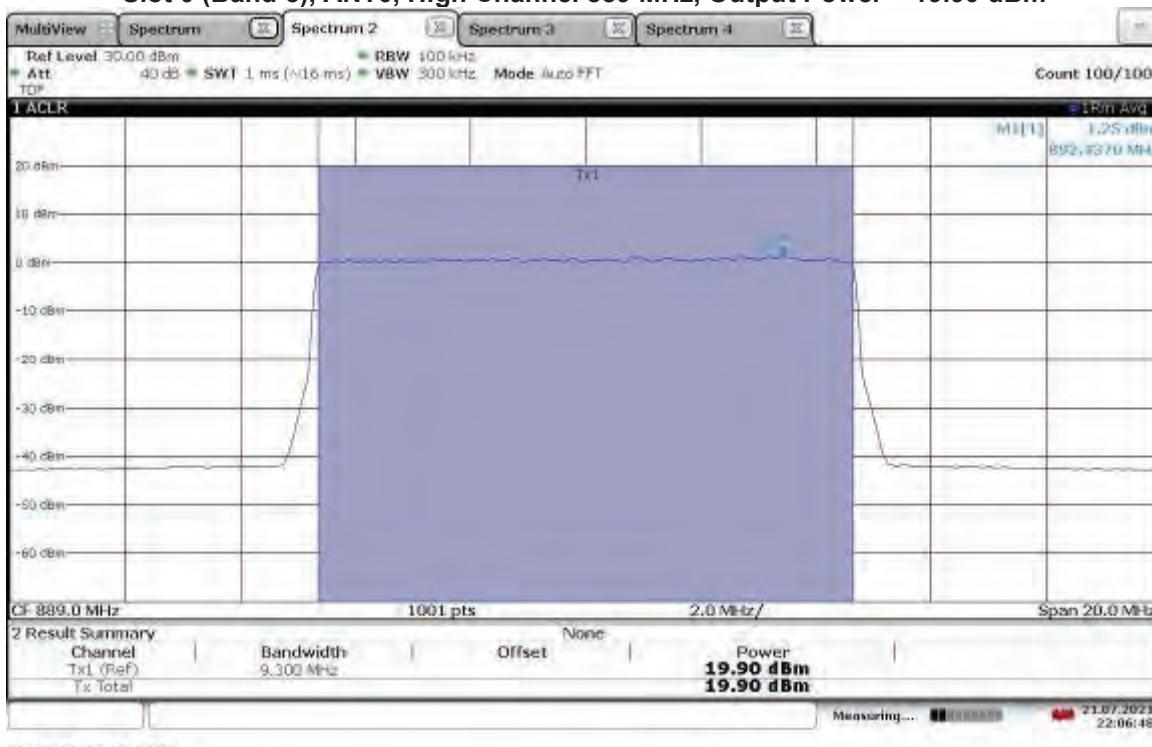


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 889 MHz, Output Power = 19.66 dBm

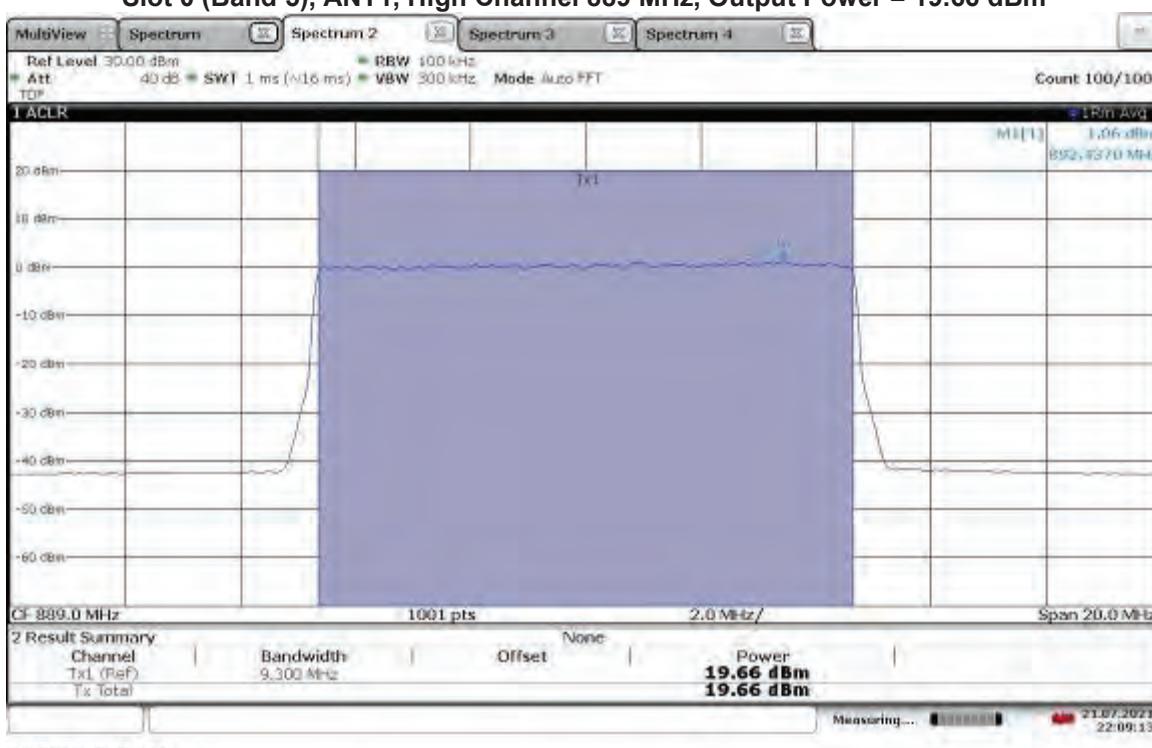


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 876.5 MHz, Output Power = 19.99 dBm

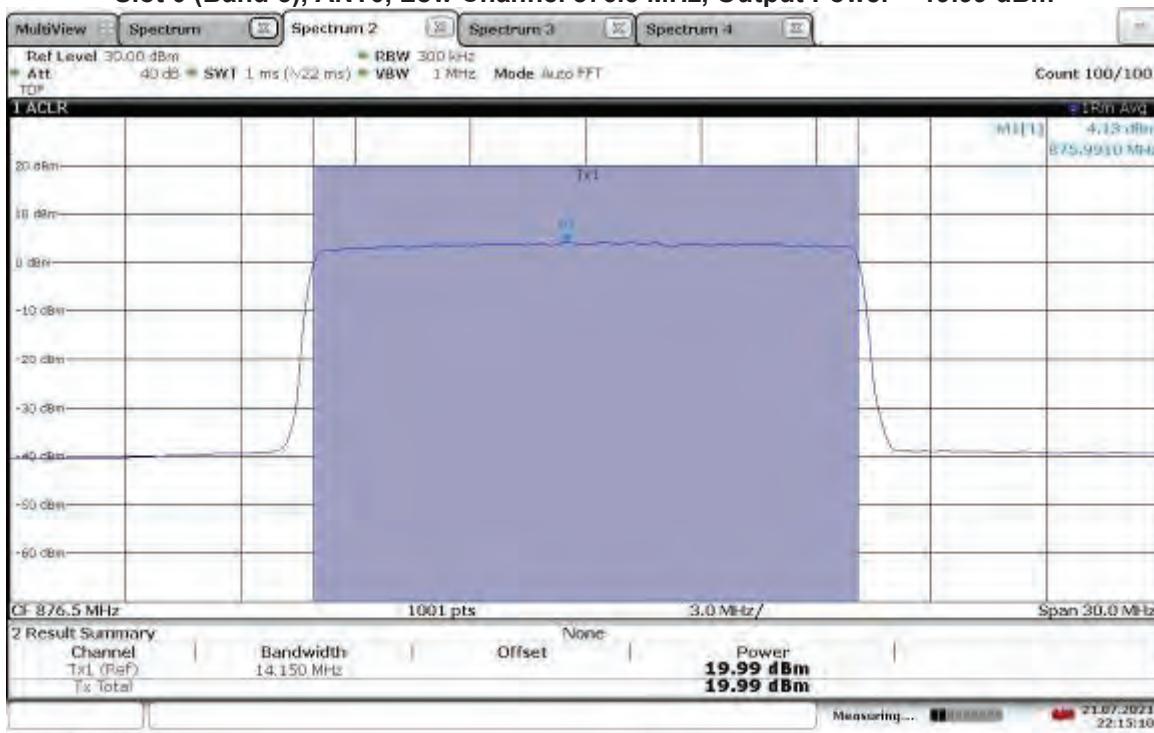

TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 876.5 MHz, Output Power = 19.85 dBm

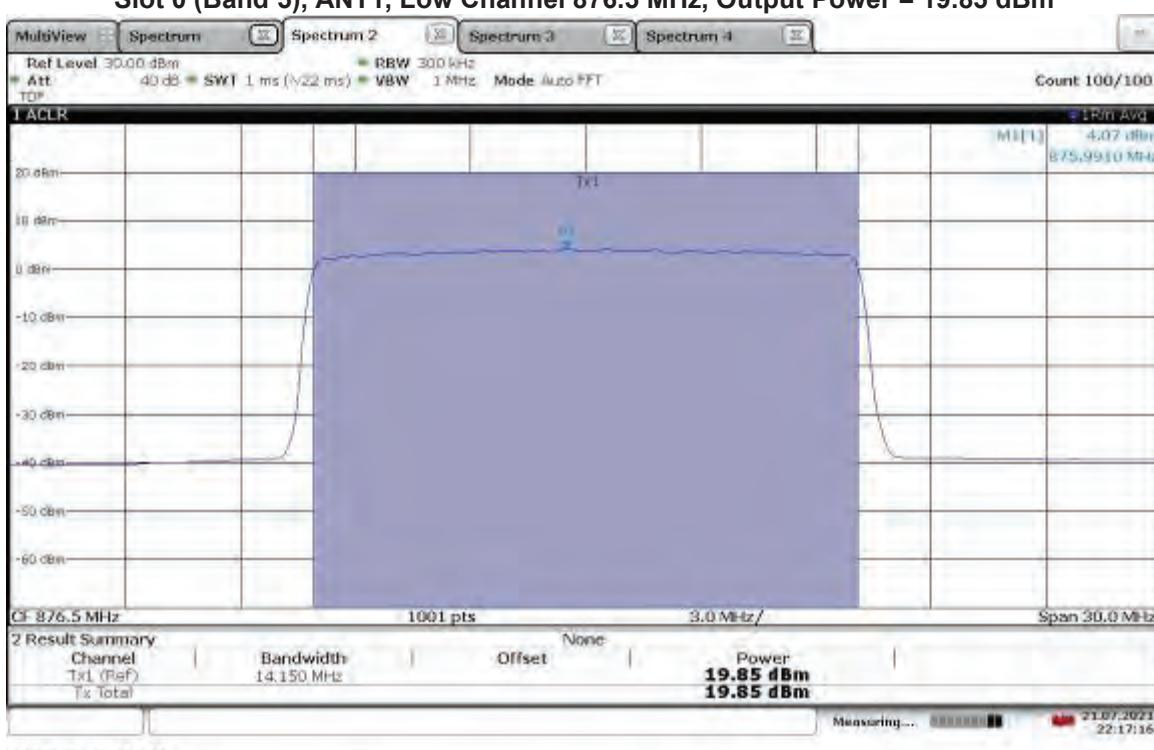


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, Output Power = 19.78 dBm

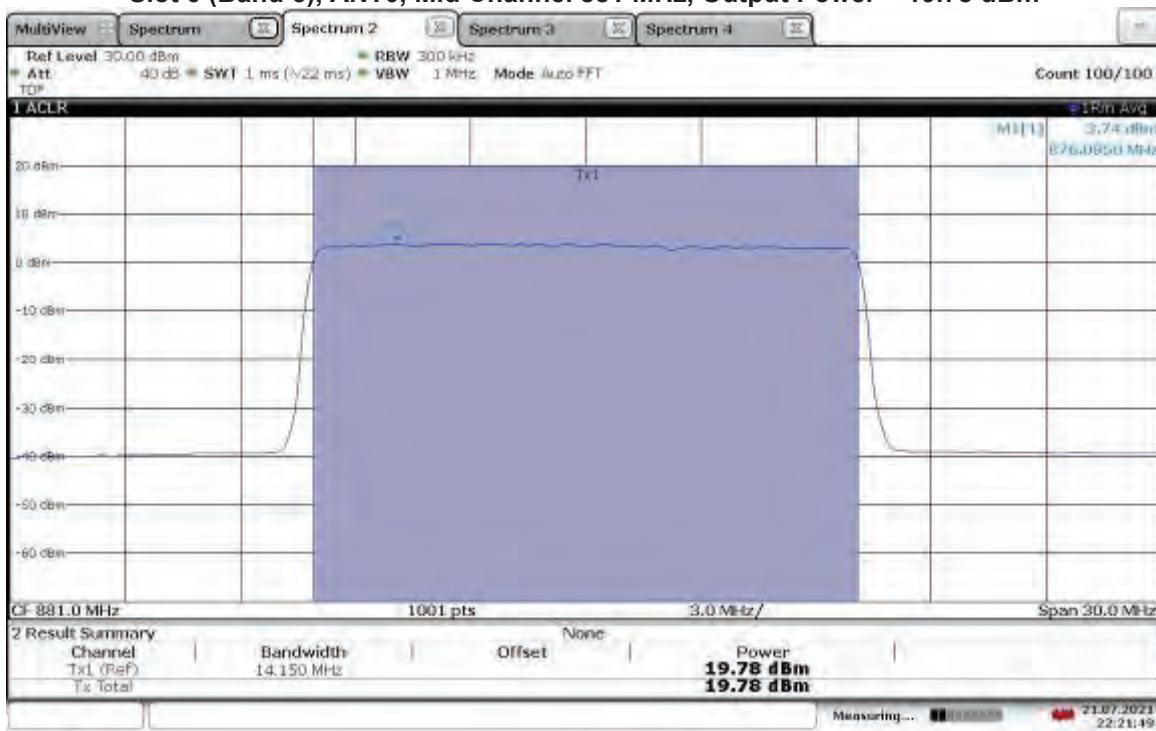


22:21:49 21.07.2021

TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.51 dBm

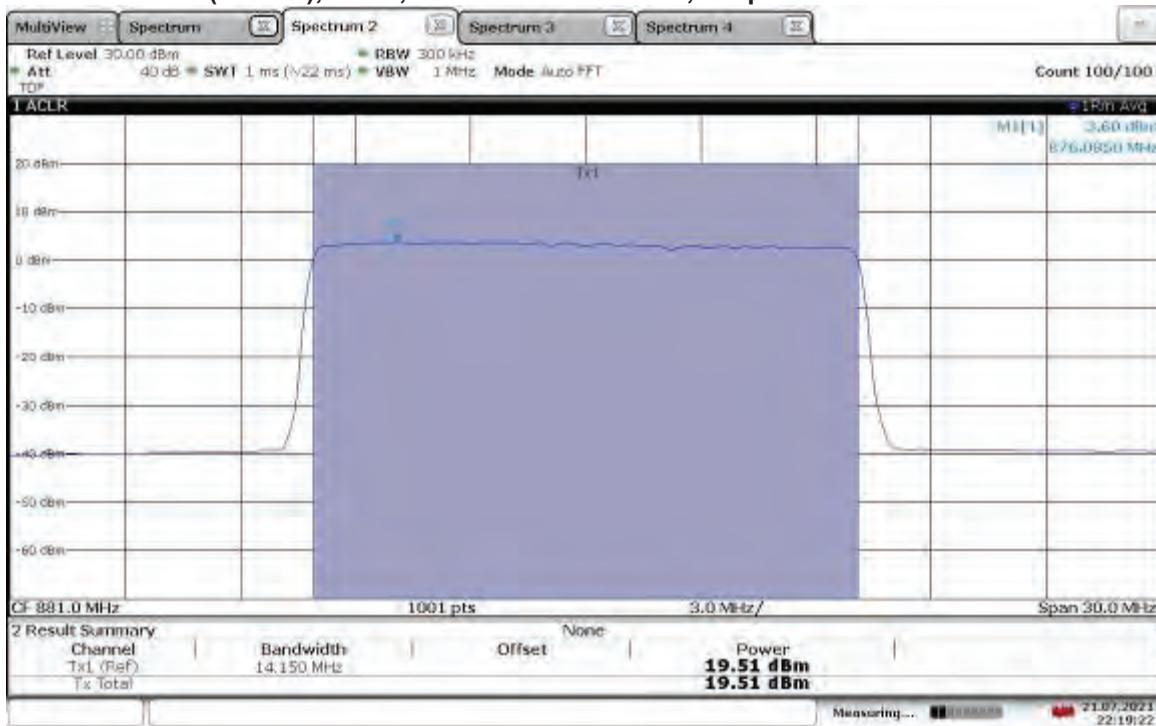


22:19:23 21.07.2021


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 886.5 MHz, Output Power = 19.83 dBm

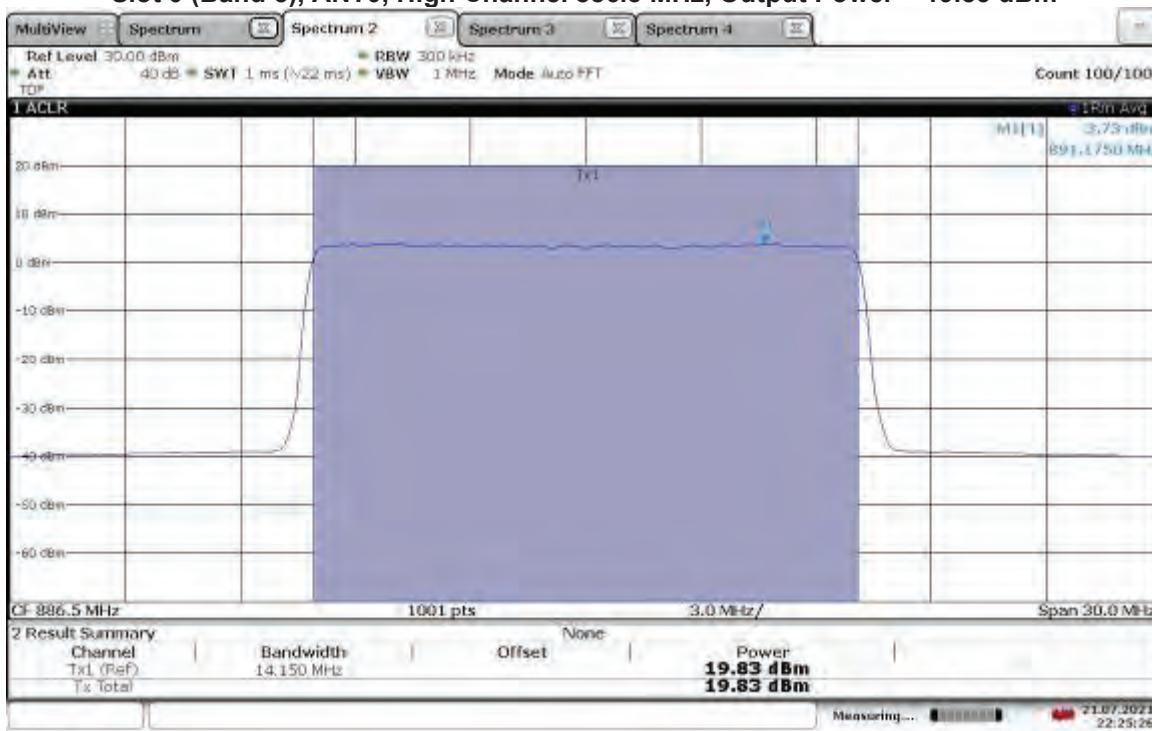


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, Output Power = 19.54 dBm

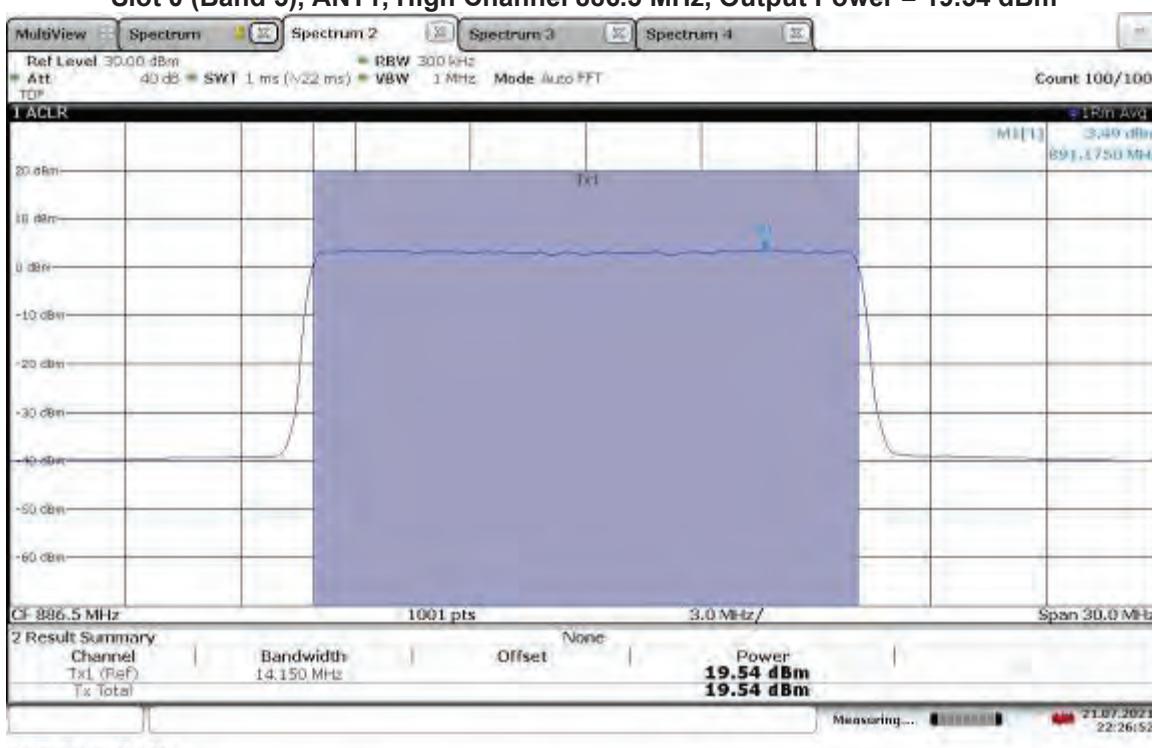


TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 879 MHz, Output Power = 19.70 dBm

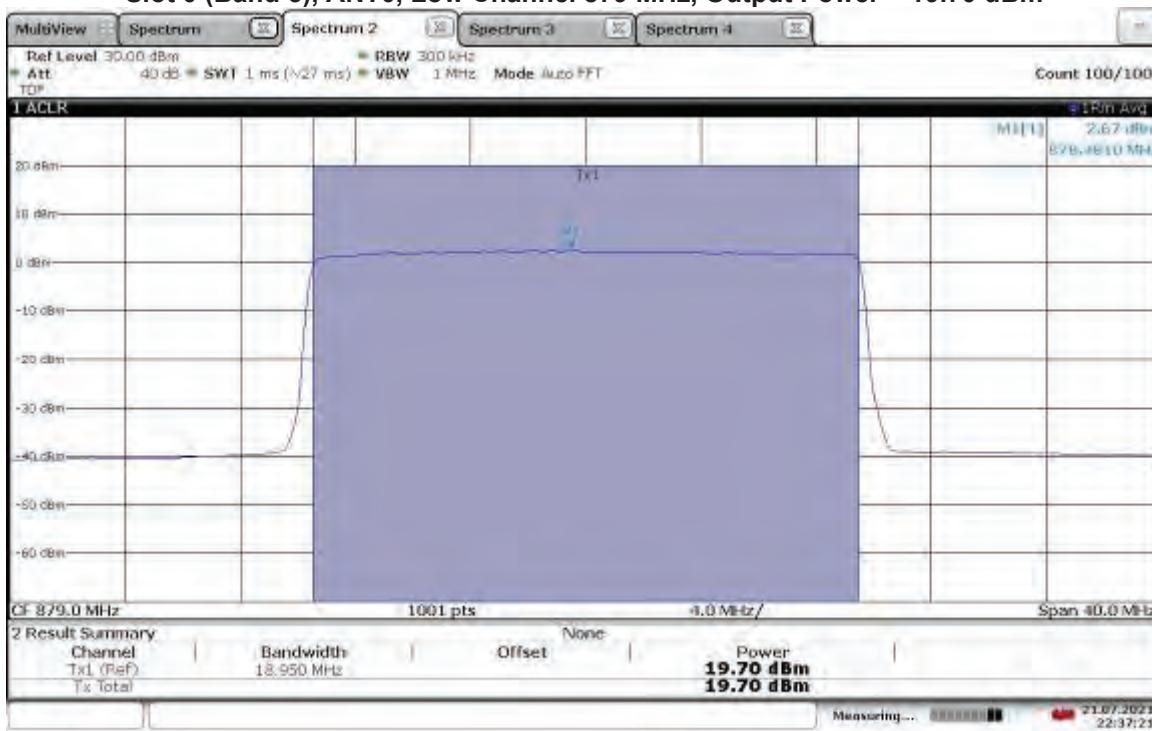


TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 879 MHz, Output Power = 19.74 dBm

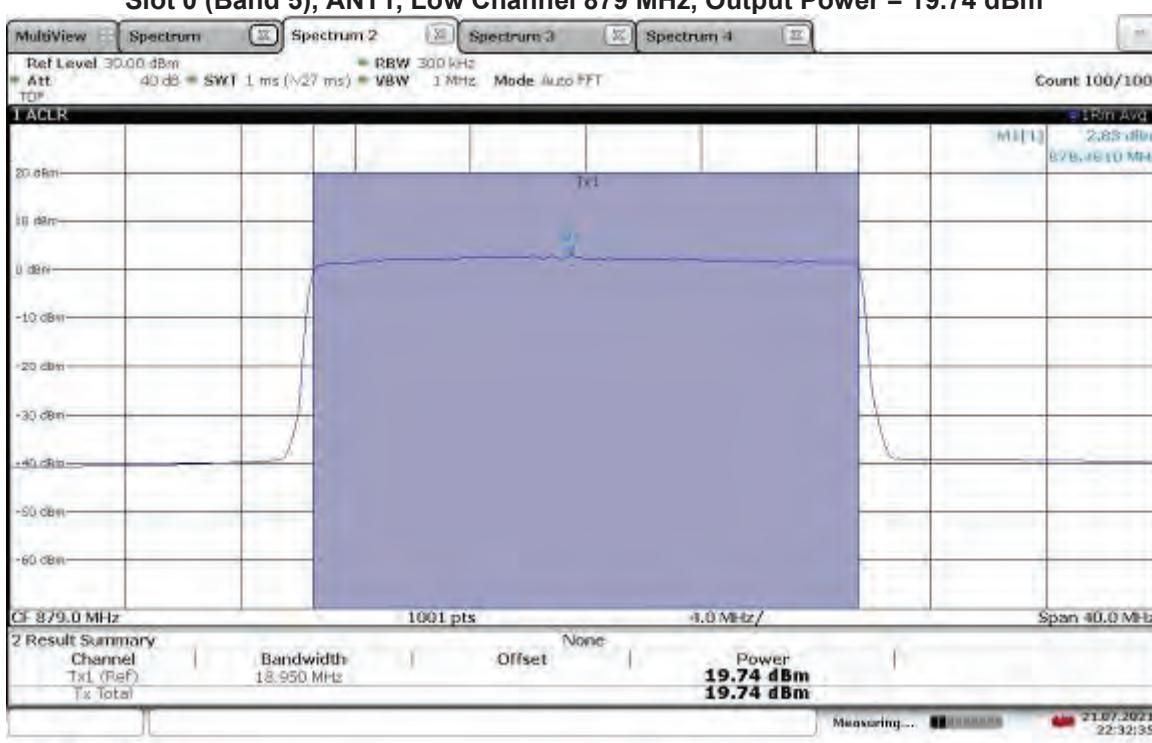


TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 884 MHz, Output Power = 19.75 dBm

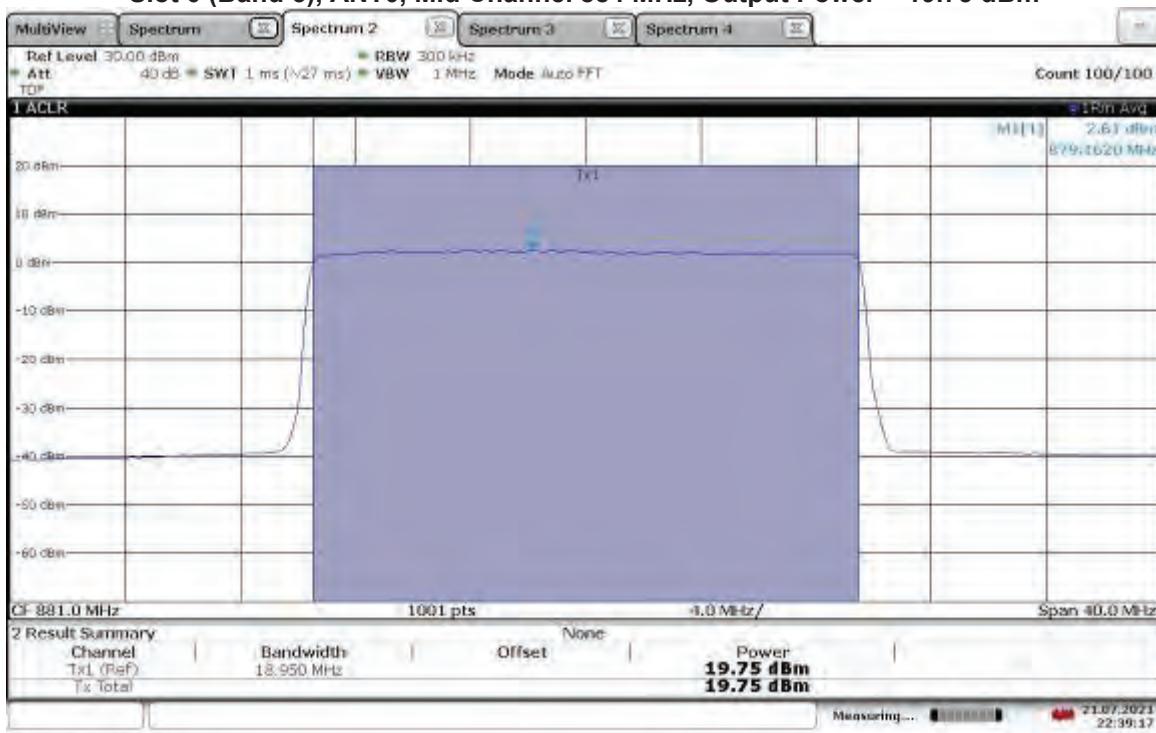


TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 19.47 dBm

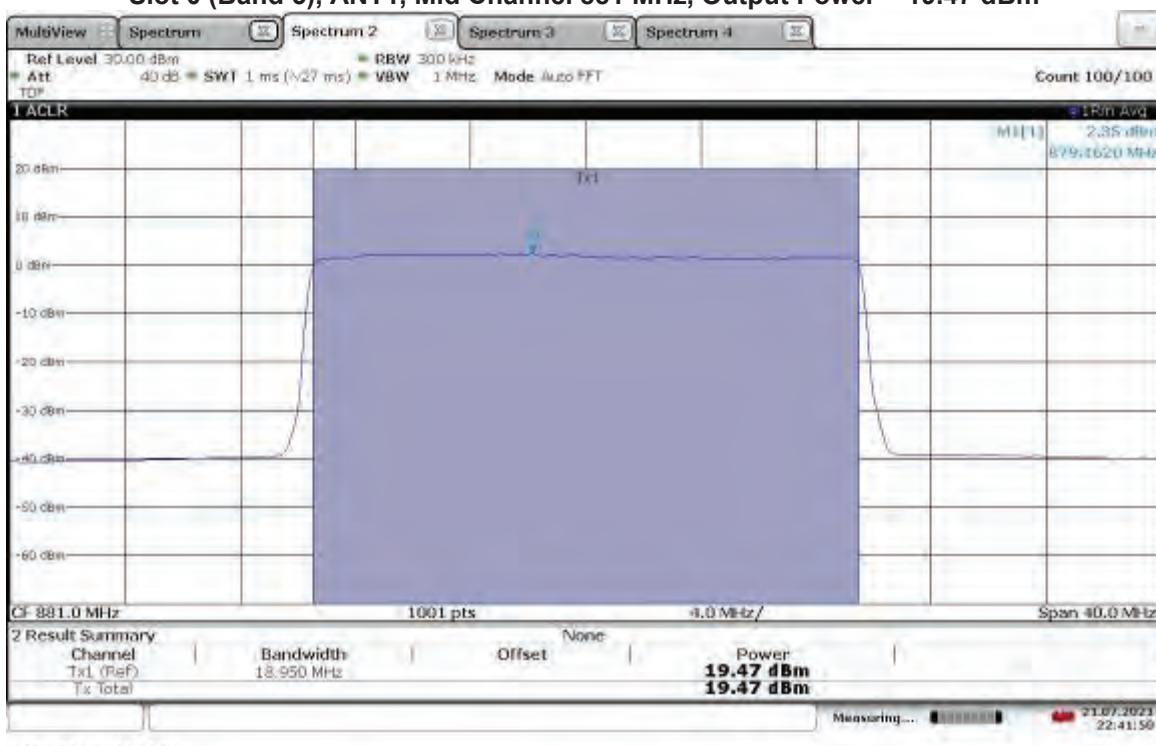

TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 884 MHz, Output Power = 19.93 dBm

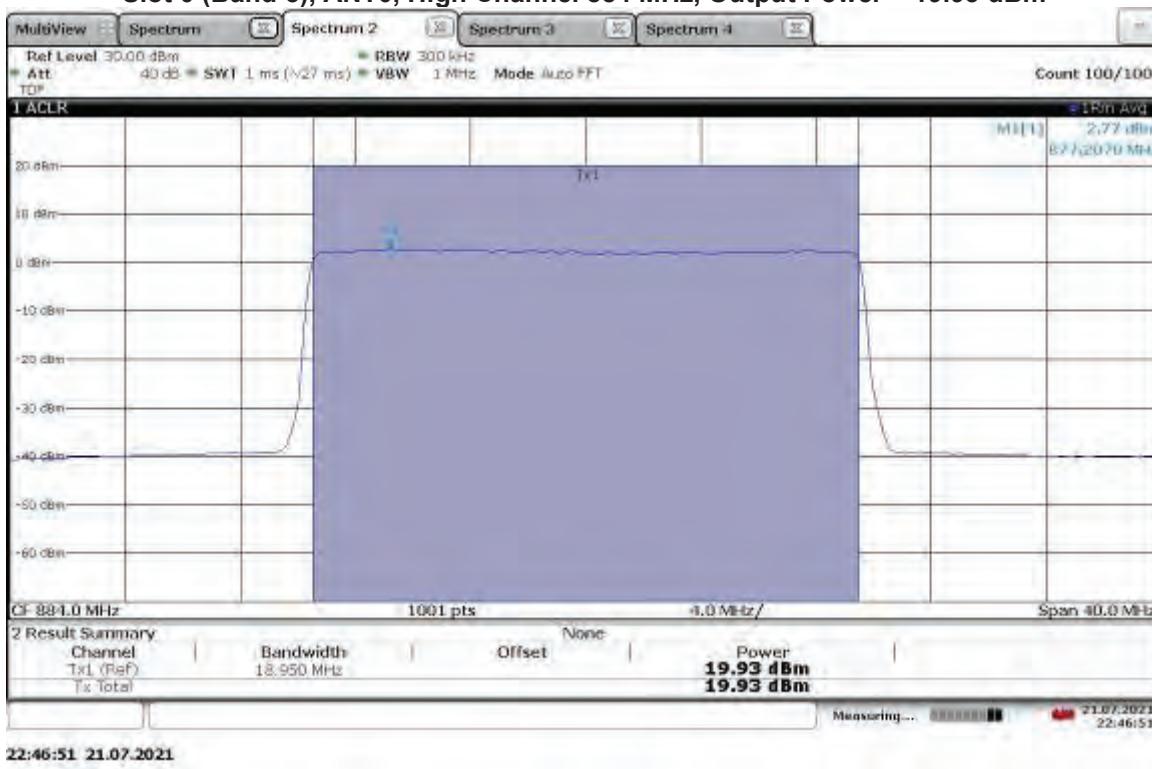

TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 884 MHz, Output Power = 19.73 dBm

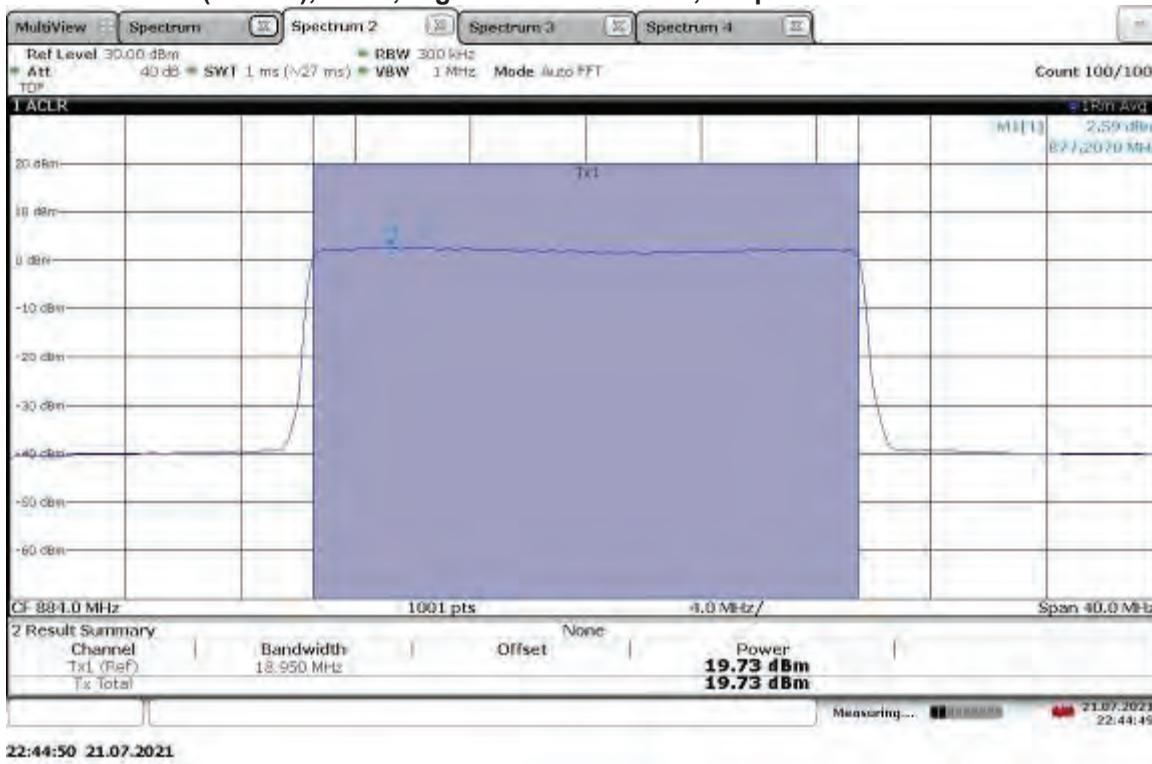

Limit for Maximum Permissible Exposure (MPE)**FCC Human RF Exposure Limits:**

The FCC §1.1310 The criteria listed in table 1 was used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices shall be evaluated according to the provisions of §2.1093 of this chapter.

Part §1.1310 Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

(1) Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase *fully aware* in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of *transient* persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for *transient* persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase *exercise control* means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.

(2) General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Test Procedure

RF exposure for licensed transmitter is handled at the time of licensing, however, an MPE calculation was performed in order to show the distance at which the device is compliant with the limits of §1.1310, assuming antenna gains of 0 dBi and 4 dBi. The highest measured conducted output power was used, adjusted by +3 dB to account for two antenna MIMO operation.

FCC Limit For General Population/Uncontrolled Exposure at 874 MHz = 0.58 mW/cm²

$$\text{Power Density} = [\text{EIRP}] / [4\pi \times (D_{\text{cm}})^2]$$

Where EIRP is in milliwatts and D is in centimeters. Setting the power density equal to the limit of 1 mW/cm² and solving for D_{cm} yields the following results.

Results:

EUT EIRP = Conducted power + Array Gain + Antenna gain in dBi

$$\text{Power Density Limit} = [\text{EIRP}] / [4\pi \times (D_{\text{cm}})^2]$$

$$0.58 \text{ mW/cm}^2 = [\text{EIRP}] / [4\pi \times (D_{\text{cm}})^2]$$

$$D_{\text{cm}} = ([\text{EIRP}] / [4\pi \times 0.58])^{1/2}$$

For Gain = 0 dBi,

$$\text{EIRP} = 20.14 \text{ dBm} + 10 \times \text{LOG}(2) + 0 \text{ dBi} = 20.14 \text{ dBm} + 3 \text{ dB} + 0 \text{ dBi}$$

$$\text{EIRP} = 23.14 \text{ dBm} \text{ or } 206.06299133 \text{ mW}$$

Therefore, the minimum safe distance D_{cm} is D_{cm} = ([206.06299133] / [4π*0.58])^{1/2}

$$D_{\text{cm}} = 5.32 \text{ cm at } 0 \text{ dBi gain two antenna MIMO}$$

For Gain = 4 dBi,

$$\text{EIRP} = 20.14 \text{ dBm} + 10 \times \text{LOG}(2) + 4 \text{ dBi} = 20.14 \text{ dBm} + 3 \text{ dB} + 4 \text{ dBi}$$

$$\text{EIRP} = 27.14 \text{ dBm} \text{ or } 517.60683195 \text{ mW}$$

Therefore, the minimum safe distance D_{cm} is D_{cm} = ([517.60683195] / [4π*0.58])^{1/2}

$$D_{\text{cm}} = 8.43 \text{ cm at } 4 \text{ dBi gain two antenna MIMO}$$

For Gain = X dBi,

$$\text{EIRP} = 20.14 \text{ dBm} + 10 \times \text{LOG}(2) + X \text{ dBi} = 20.14 \text{ dBm} + 3 \text{ dB} + X \text{ dBi}$$

$$\text{EIRP} = 23.14 + X \text{ dBm} \text{ or } 206.06299133 + 10^{(X/10)} \text{ mW}$$

Therefore, the minimum safe distance D_{cm} is D_{cm} = ([206.06299133 + 10^(X/10)] / [4π*0.58])^{1/2}

$$D_{\text{cm}} = 0.371 \times (429.536423 + 10^{(X/10)})^{1/2} \text{ cm at } X \text{ dBi gain two antenna MIMO}$$

Test Personnel: Vathana Ven

Test Date: 07/21/2021, 07/22/2021

Supervising/Reviewing

Engineer:

(Where Applicable) N/A

Product Standard: FCC Part 22

Limit Applied: See report section 6.3

Input Voltage: 48 VDC (POE)

Pretest Verification w/

Ambient Temperature: 22, 23 °C

Ambient Signals or

Relative Humidity: 21, 15 %

BB Source: N/A

Atmospheric Pressure: 1004, 1013 mbars

Deviations, Additions, or Exclusions: None

7 Peak-to-Average Power Ratio (PAPR)

7.1 Method

Tests are performed in accordance with CFR47 FCC Part 24 and ANSI C63.26:2015.

TEST SITE: EMC Lab

The EMC Lab has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

7.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	10/27/2020	10/27/2021
DAV005'	Weather Station	Davis	6250	MS19121808 3	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None	--	--

7.3 Results:

The sample tested was found to Comply.

§24.232(d) The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	871.5	ANT0	10.43
		ANT1	10.63
Mid	881	ANT0	10.34
		ANT1	10.43
High	891.5	ANT0	10.33
		ANT1	10.58

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	874	ANT0	11.55
		ANT1	11.81
Mid	881	ANT0	11.88
		ANT1	12.04
High	889	ANT0	10.81
		ANT1	11.95

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	876.1	ANT0	11.67
		ANT1	12.61
Mid	881	ANT0	12.34
		ANT1	12.21
High	886.5	ANT0	11.76
		ANT1	12.55

Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	879	ANT0	11.22
		ANT1	11.18
Mid	881	ANT0	10.75
		ANT1	11.13
High	884	ANT0	11.11
		ANT1	10.63

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	871.5	ANT0	9.72
		ANT1	9.87
Mid	881	ANT0	9.69
		ANT1	9.67
High	891.5	ANT0	9.82
		ANT1	9.87

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	874	ANT0	10.19
		ANT1	10.27
Mid	881	ANT0	10.27
		ANT1	10.12
High	889	ANT0	10.33
		ANT1	10.40

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	876.1	ANT0	11.12
		ANT1	11.24
Mid	881	ANT0	11.19
		ANT1	11.38
High	886.5	ANT0	11.11
		ANT1	11.28

Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	879	ANT0	10.45
		ANT1	10.19
Mid	881	ANT0	10.38
		ANT1	10.34
High	884	ANT0	10.41
		ANT1	10.22

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	871.5	ANT0	10.22
		ANT1	10.37
Mid	881	ANT0	10.15
		ANT1	10.19
High	891.5	ANT0	10.10
		ANT1	10.23

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	874	ANT0	10.12
		ANT1	10.20
Mid	881	ANT0	9.59
		ANT1	10.25
High	889	ANT0	10.06
		ANT1	10.41

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	876.1	ANT0	10.82
		ANT1	10.74
Mid	881	ANT0	10.53
		ANT1	10.87
High	886.5	ANT0	11.09
		ANT1	11.16

Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	879	ANT0	10.37
		ANT1	10.29
Mid	881	ANT0	10.02
		ANT1	10.32
High	884	ANT0	10.38
		ANT1	10.38

Slot 0 (Band 5), Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	871.5	ANT0	9.65
		ANT1	9.76
Mid	881	ANT0	9.85
		ANT1	9.87
High	891.5	ANT0	9.88
		ANT1	9.80

Slot 0 (Band 5), Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	874	ANT0	10.40
		ANT1	10.55
Mid	881	ANT0	10.06
		ANT1	10.57
High	889	ANT0	10.49
		ANT1	10.57

Slot 0 (Band 5), Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	876.1	ANT0	10.27
		ANT1	10.10
Mid	881	ANT0	10.33
		ANT1	10.21
High	886.5	ANT0	10.04
		ANT1	9.69

Slot 0 (Band 5), Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	879	ANT0	10.57
		ANT1	10.84
Mid	881	ANT0	10.17
		ANT1	10.20
High	884	ANT0	10.14
		ANT1	10.07


7.4 Setup Photograph:

Photographs are available in a separate exhibit

7.5 Plots/Data:

TM1.1-QPSK_5 MHz Bandwidth


Slot 0 (Band 5), ANT0, Low Channel 871.5 MHz, PAPR = 10.43 dB

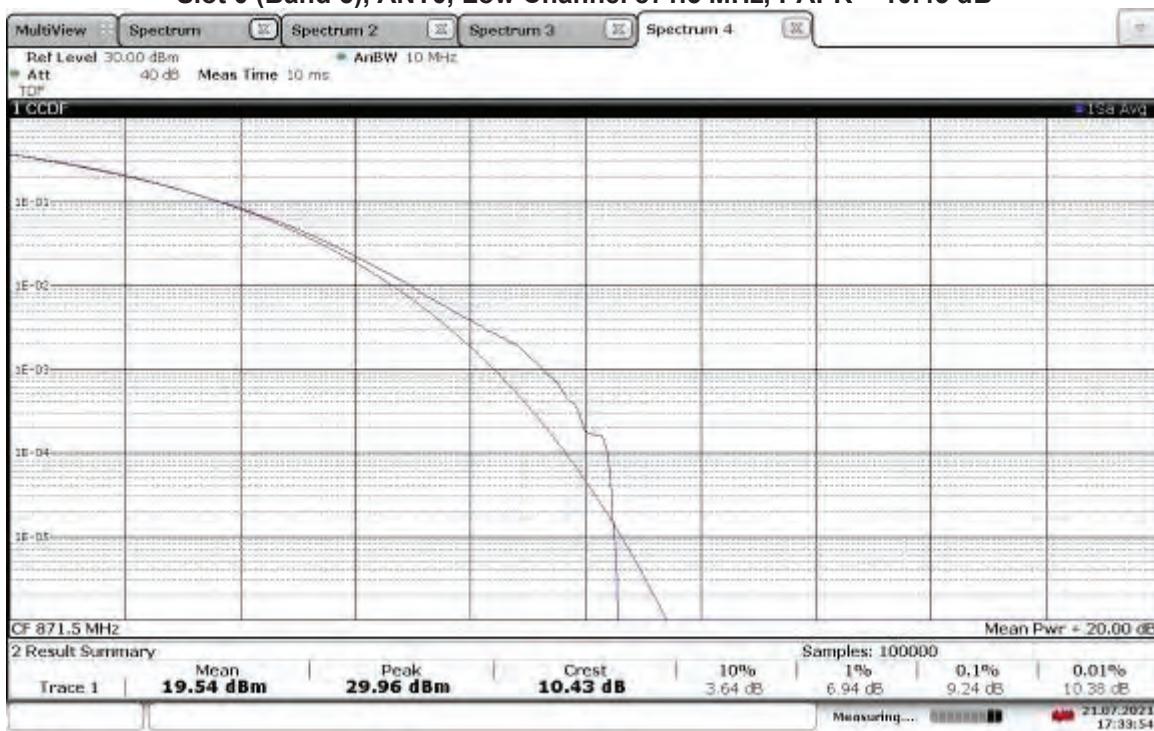

17:33:54 21.07.2021


TM1.1-QPSK_5 MHz Bandwidth

Slot 0 (Band 5), ANT1, Low Channel 871.5 MHz, PAPR = 10.63 dB

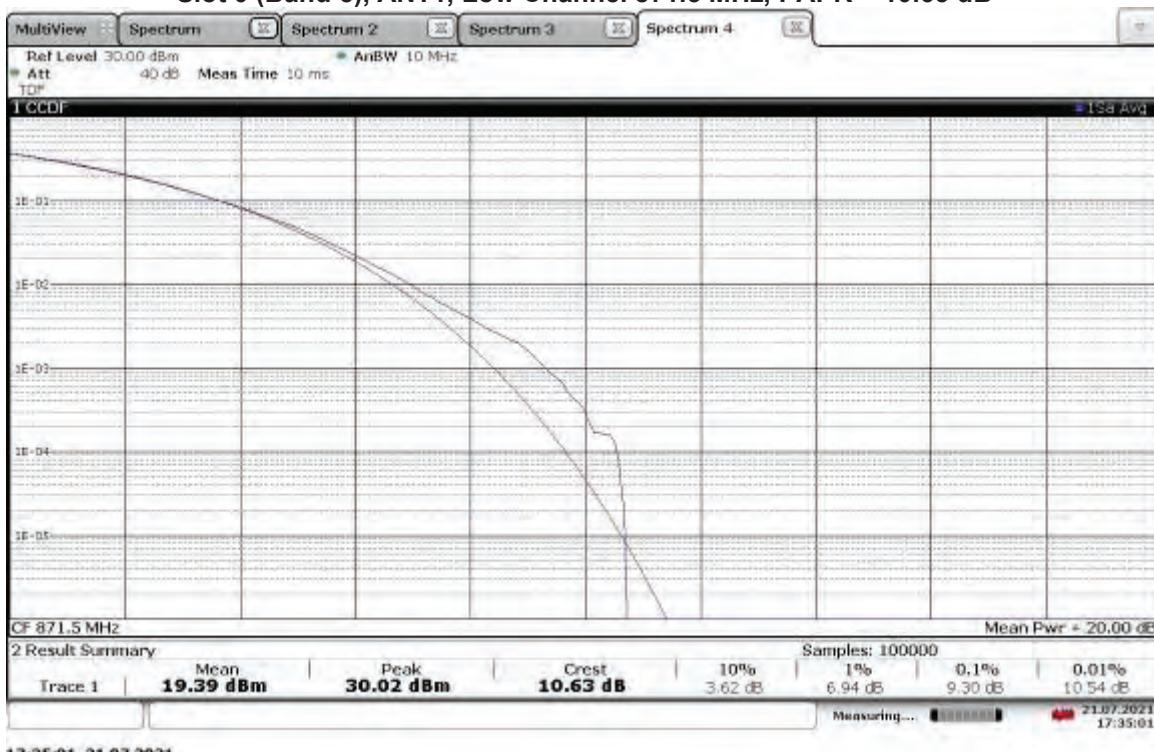


17:35:01 21.07.2021


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 10.34 dB

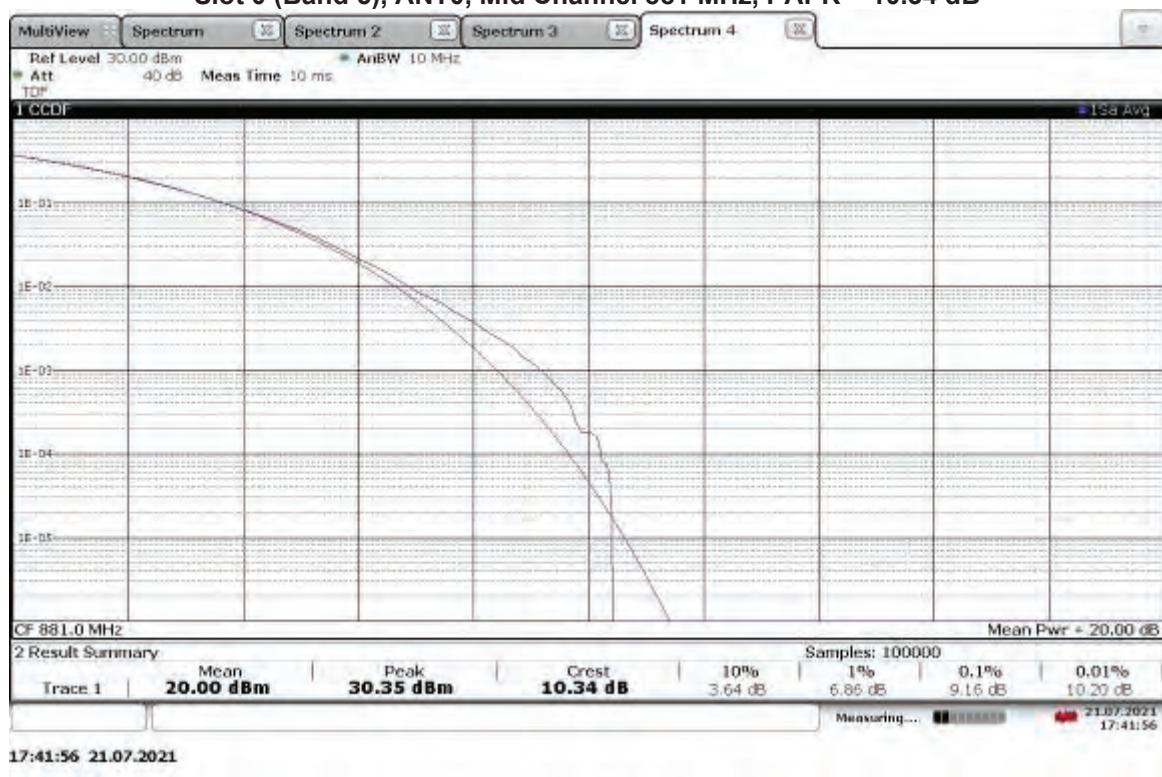


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 10.43 dB

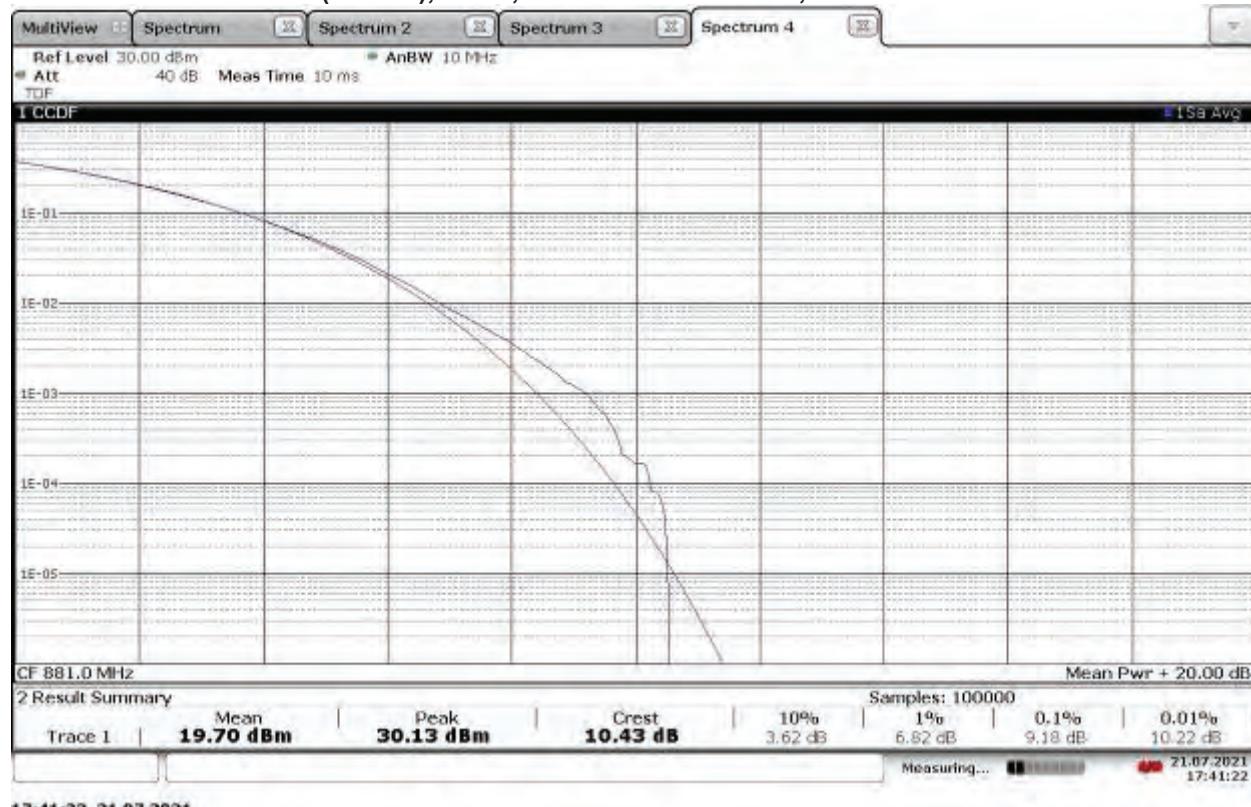


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 891.5 MHz, PAPR = 10.33 dB

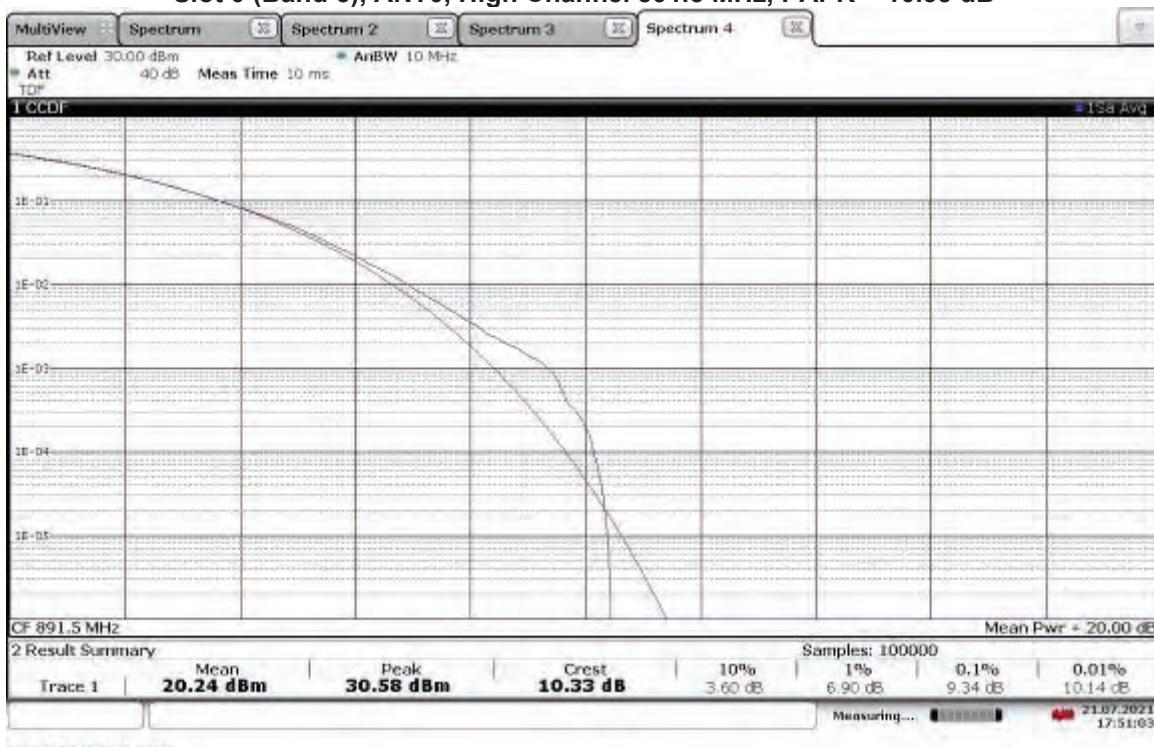


TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 891.5 MHz, PAPR = 10.58 dB

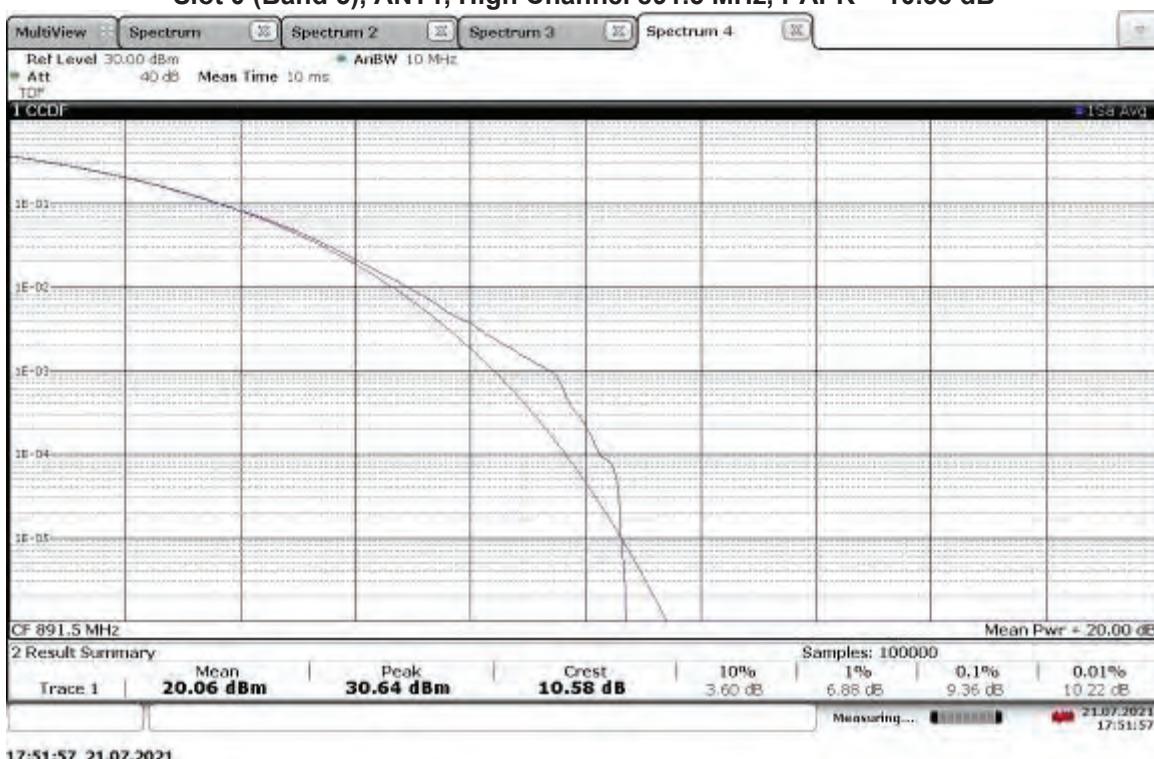


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 874 MHz, PAPR = 11.55 dB

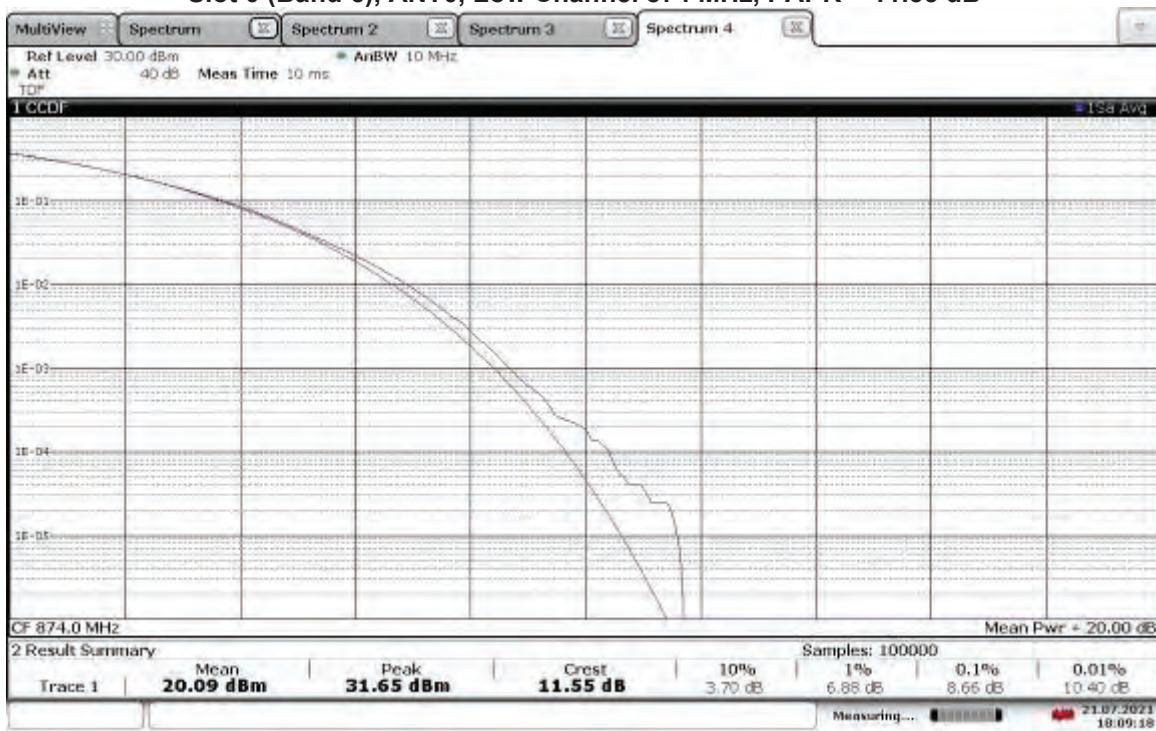

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 874 MHz, PAPR = 11.81 dB

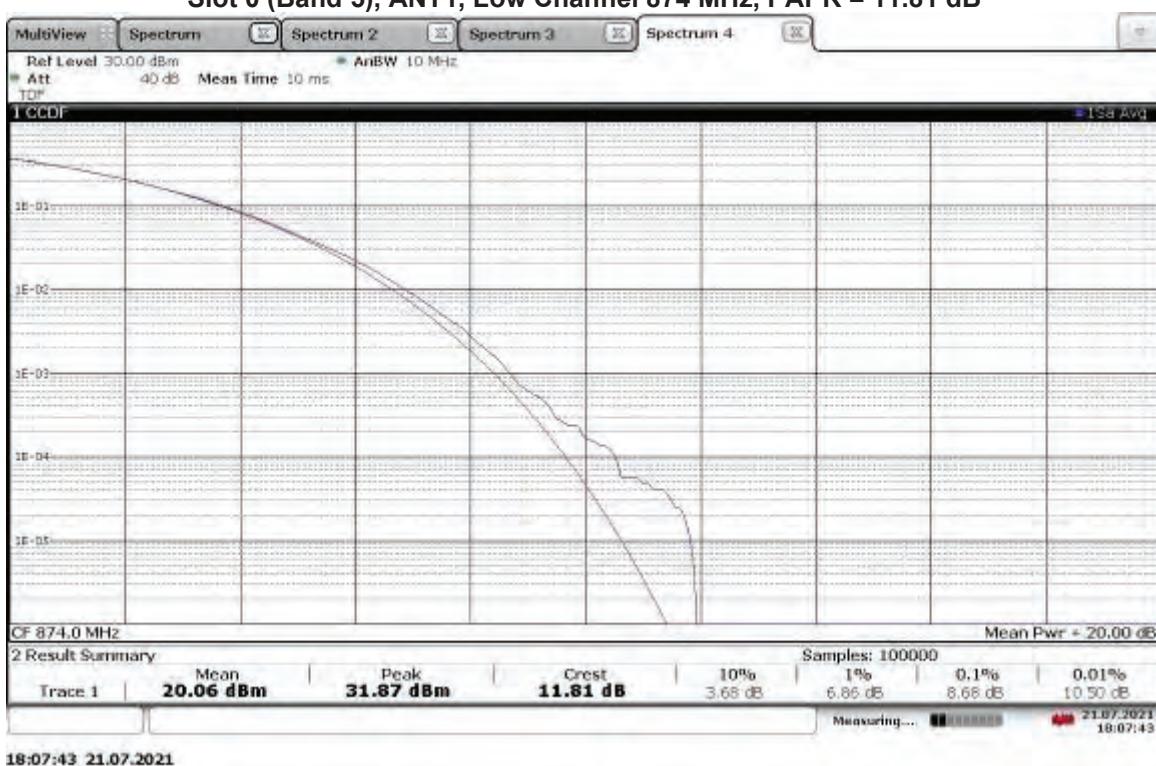


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 11.88 dB

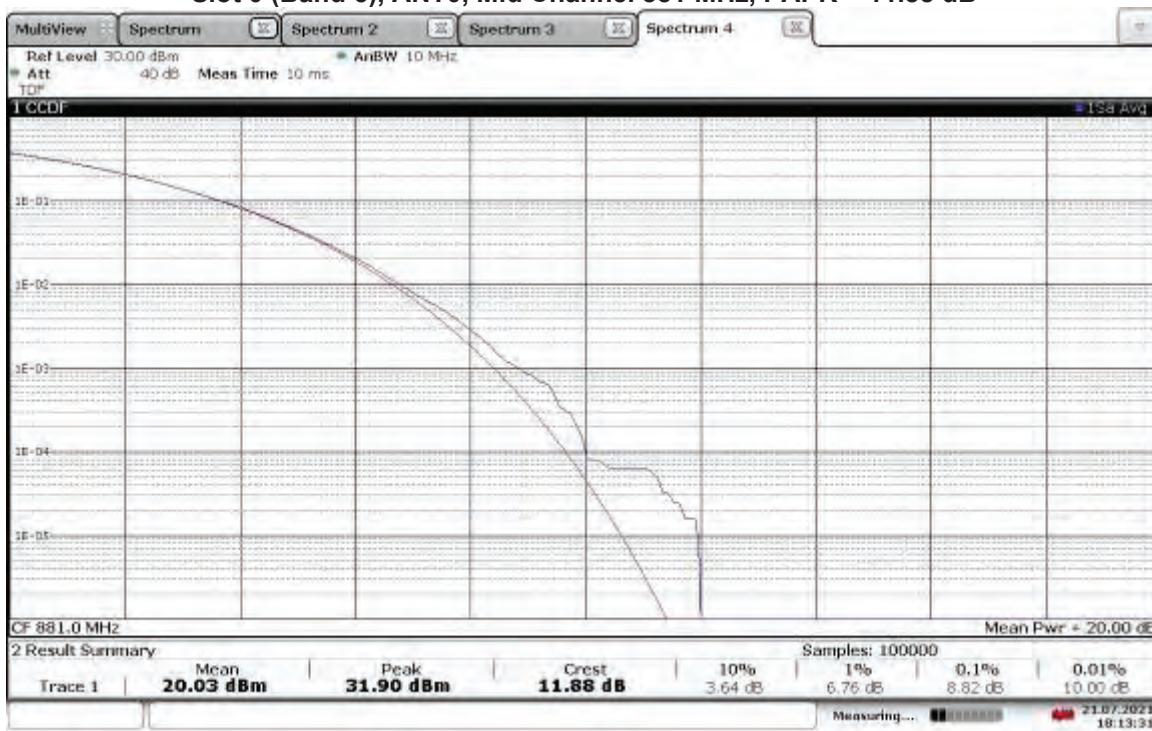


18:13:31 21.07.2021

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 12.04 dB

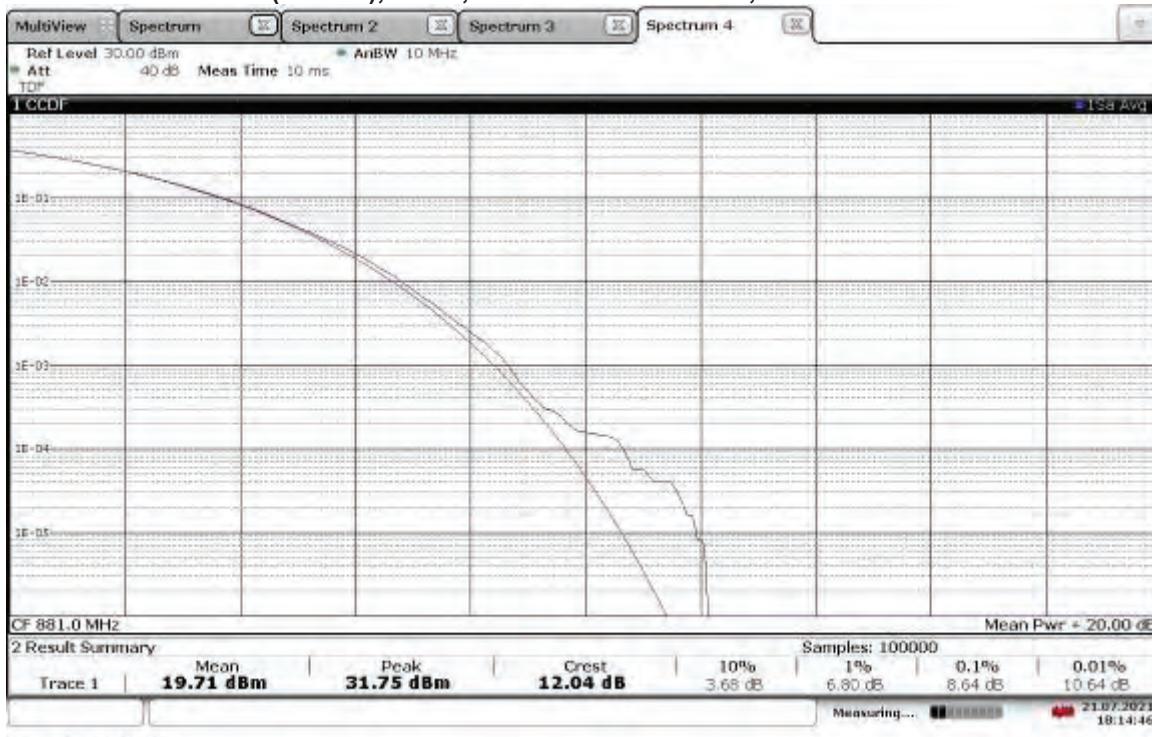


18:14:47 21.07.2021


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 889 MHz, PAPR = 10.81 dB

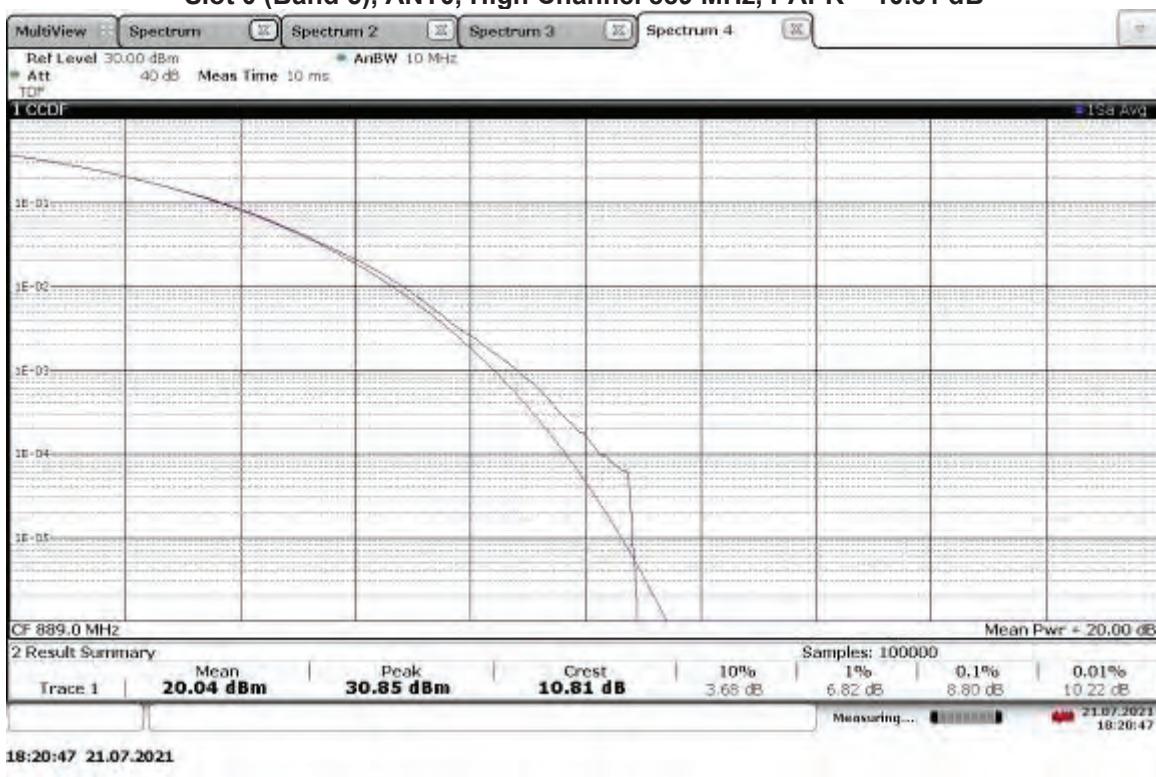


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 889 MHz, PAPR = 11.95 dB

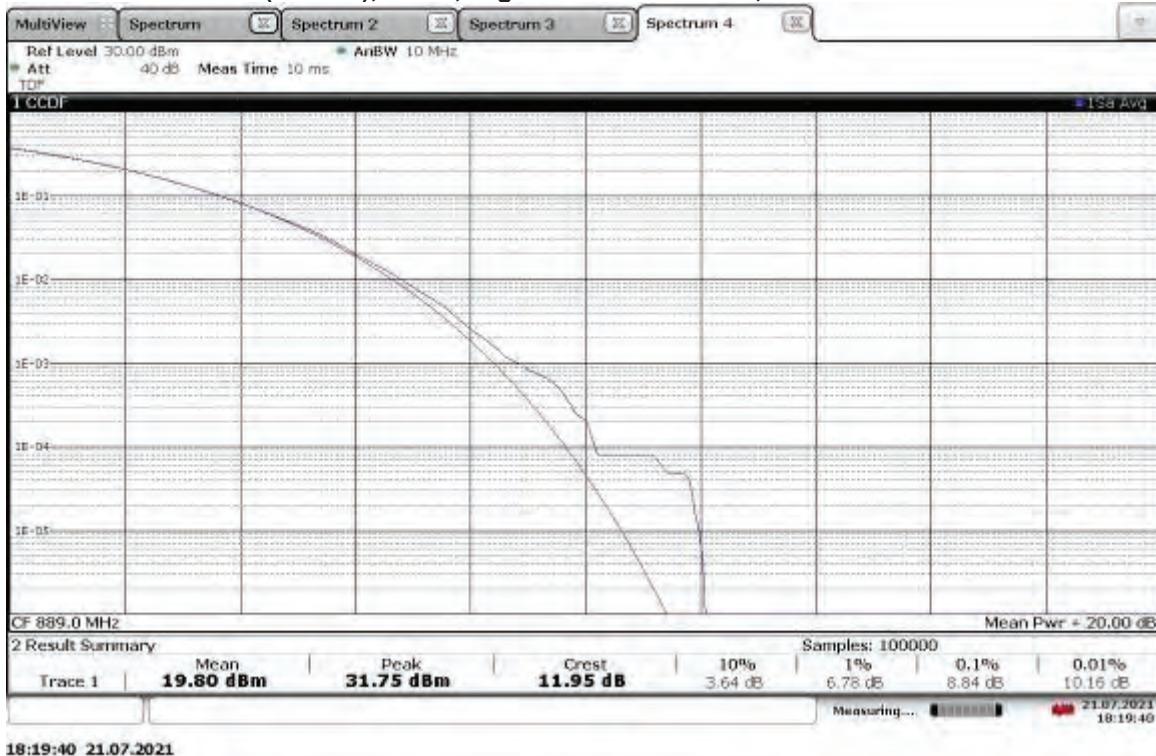


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 876.5 MHz, PAPR = 11.67 dB

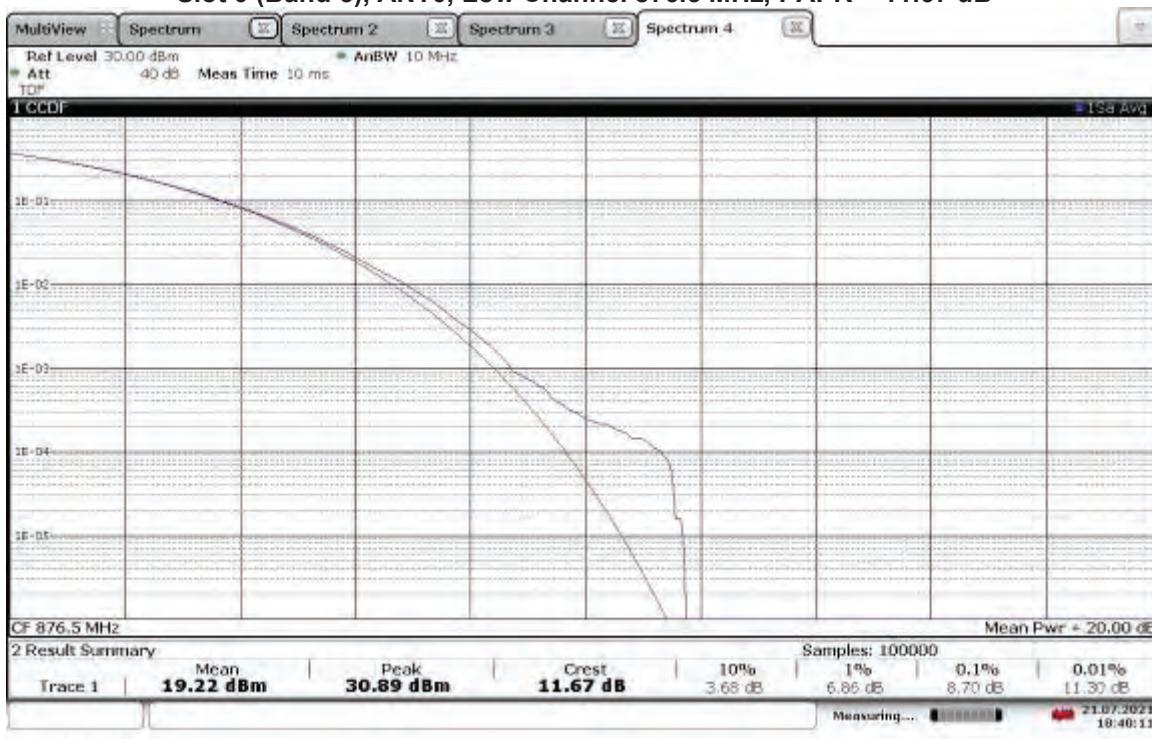


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 876.5 MHz, PAPR = 12.61 dB

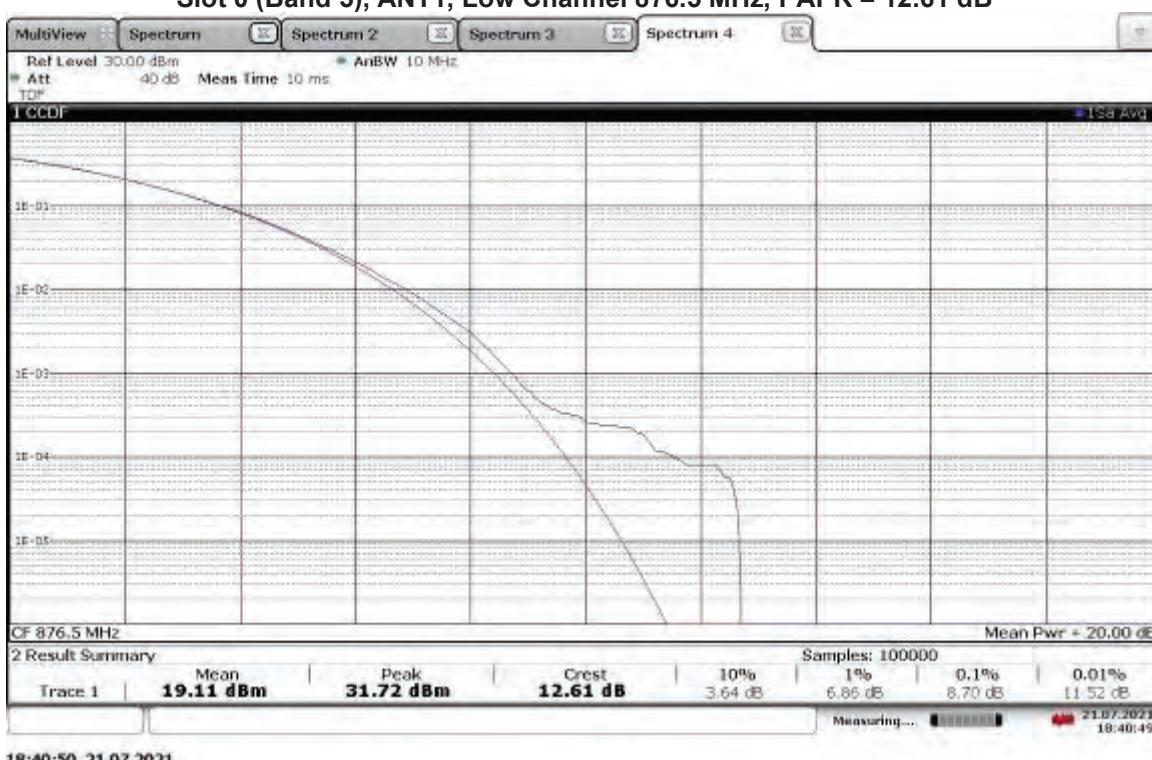


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 12.34 dB

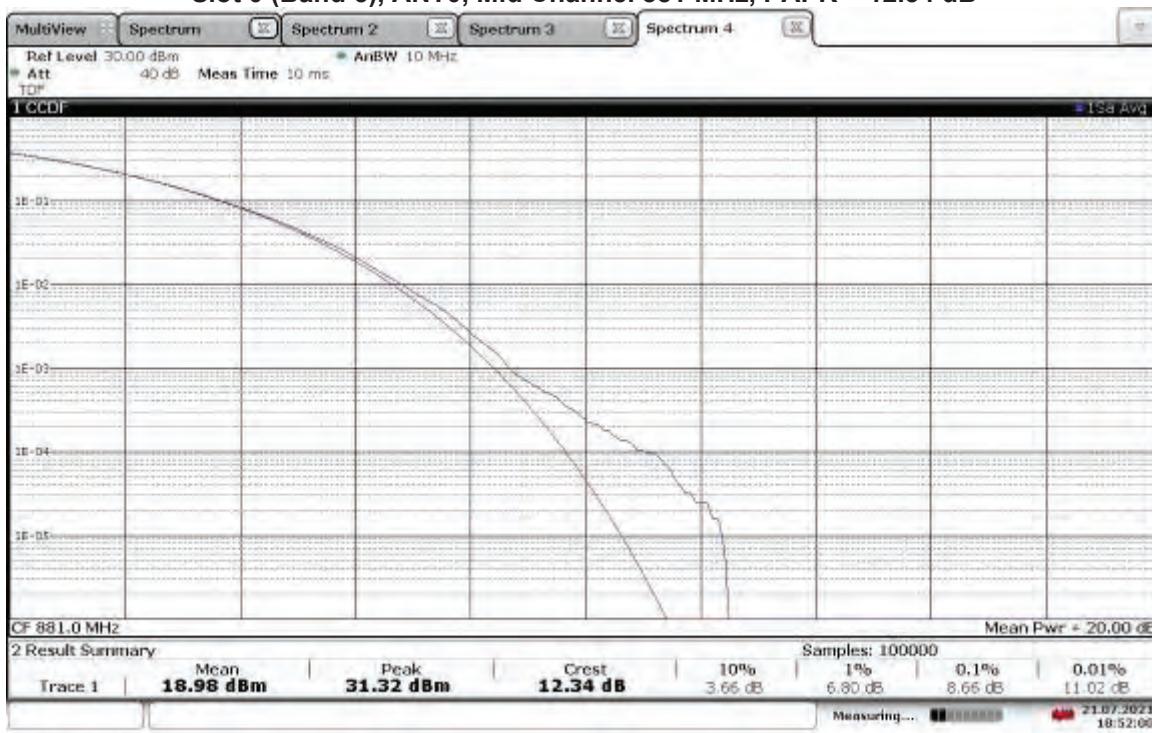

TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 12.21 dB

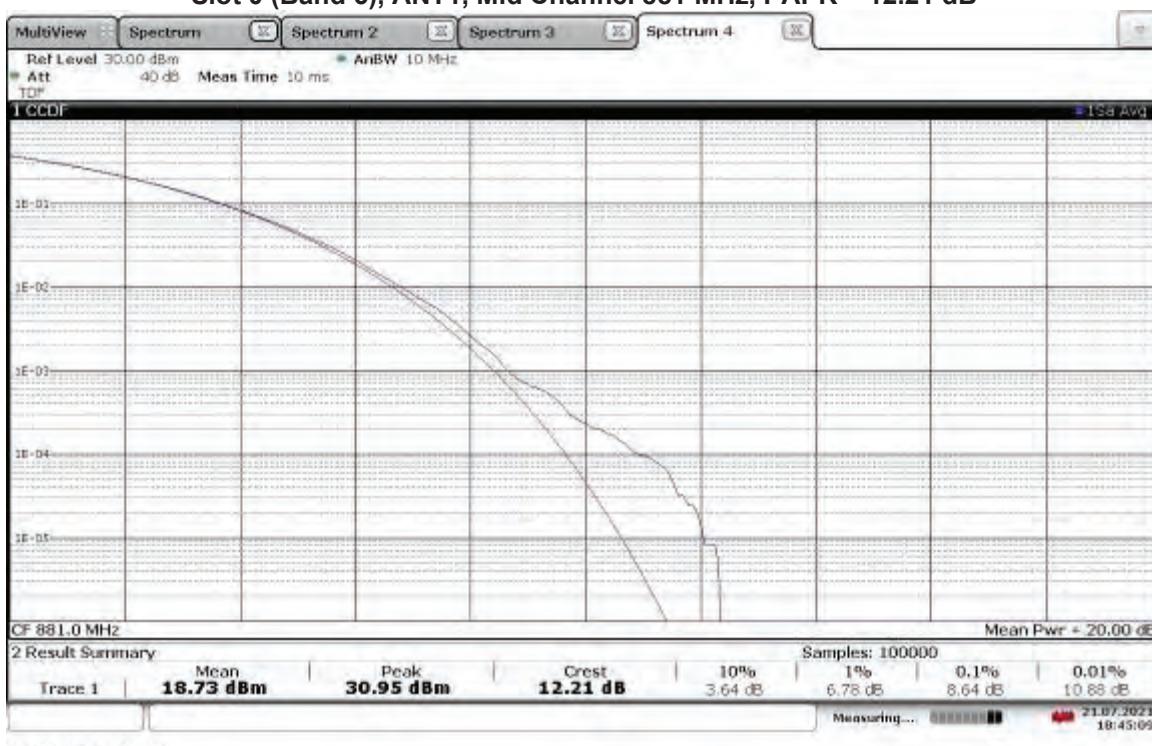


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 886.5 MHz, PAPR = 11.76 dB

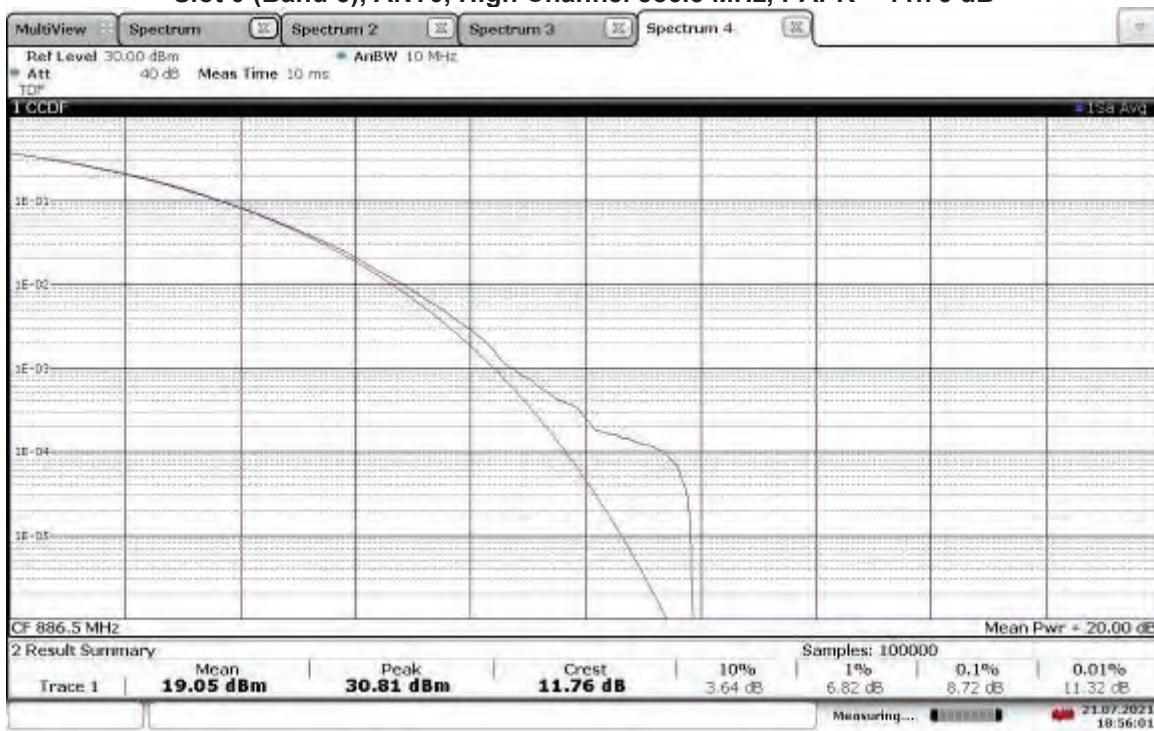


18:56:01 21.07.2021

TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, PAPR = 12.55 dB

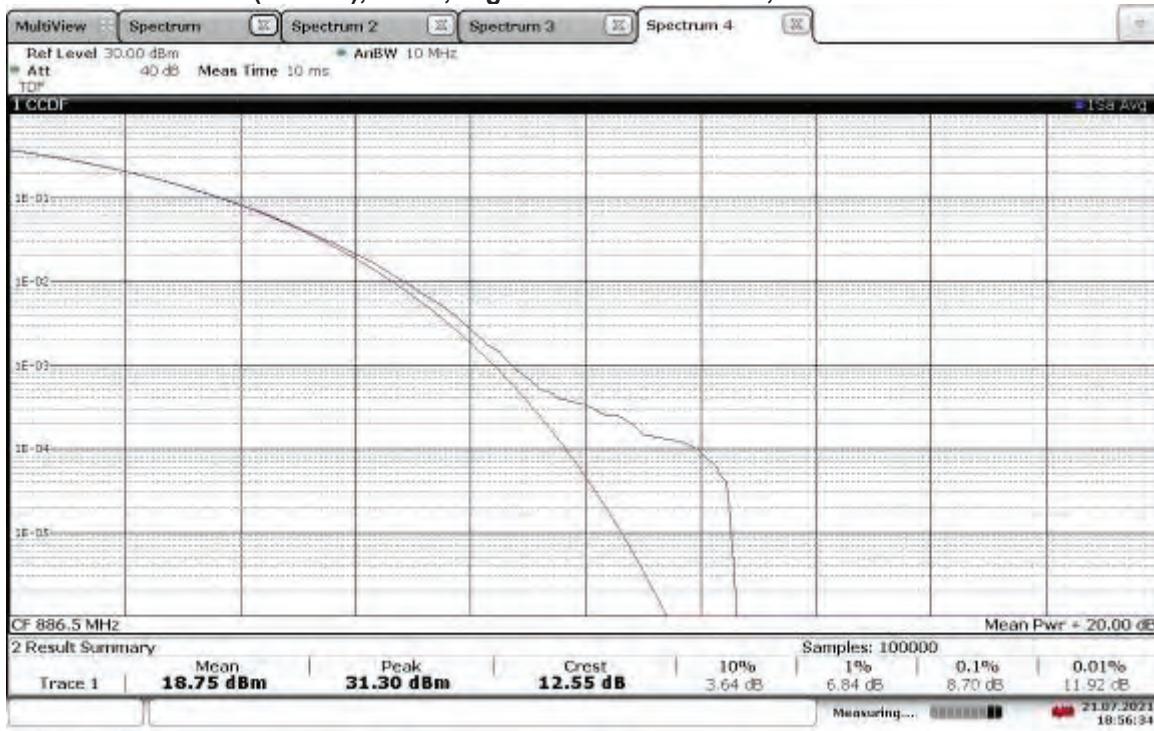


18:56:34 21.07.2021


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 879 MHz, PAPR = 11.22 dB

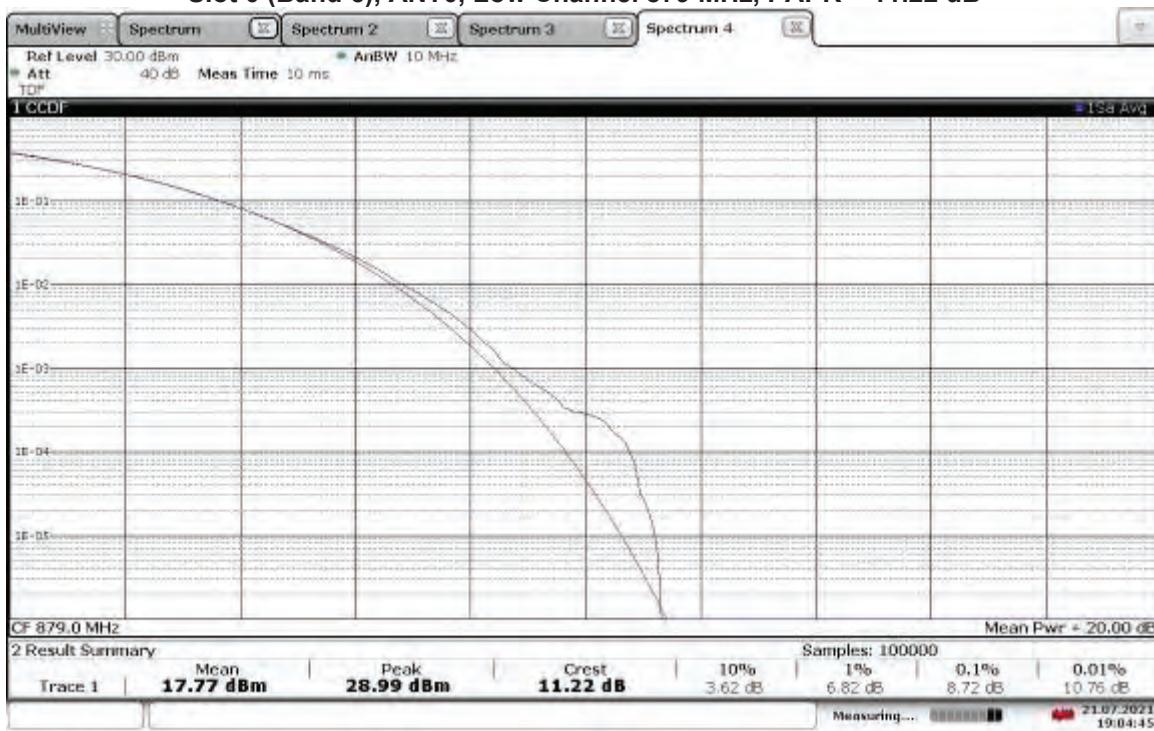


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 879 MHz, PAPR = 11.18 dB

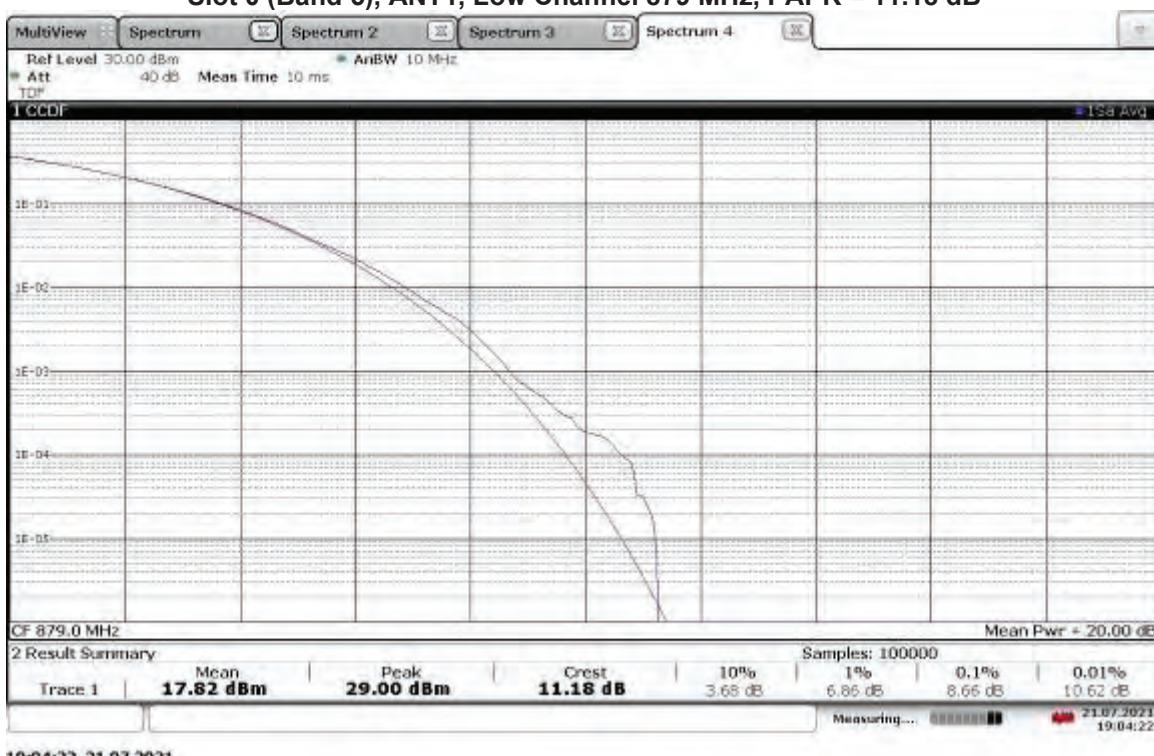


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 10.75 dB

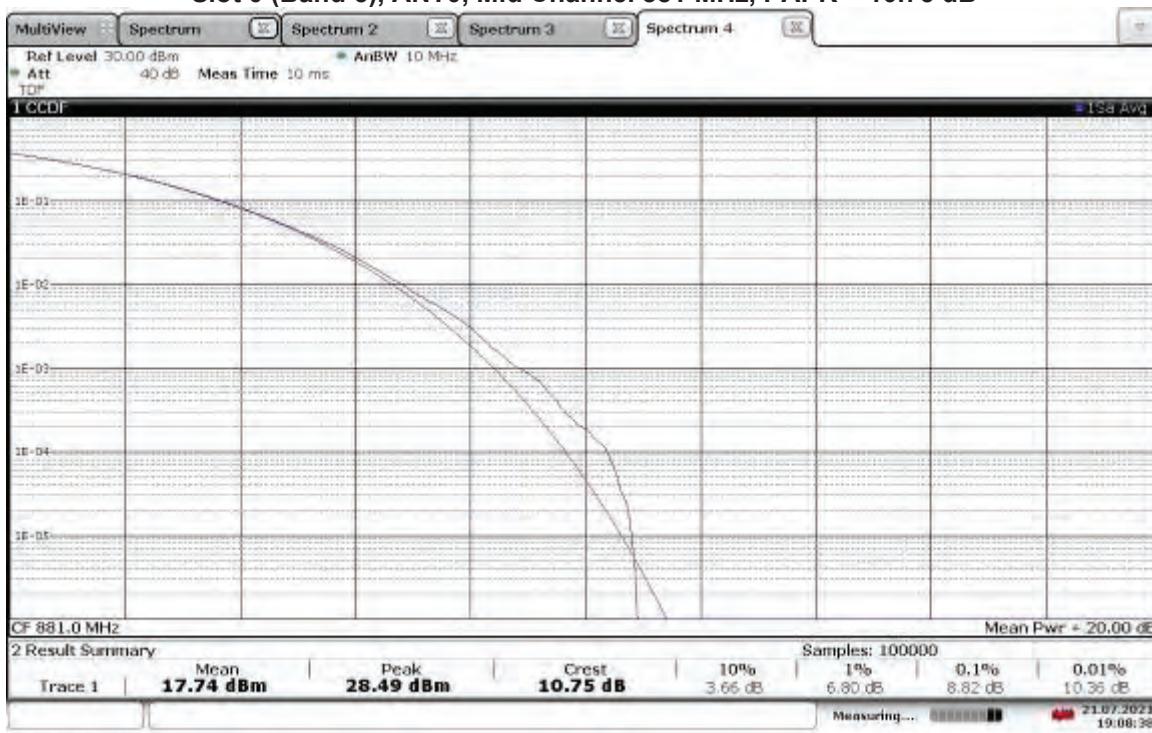


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, Output Power = 11.13 dB

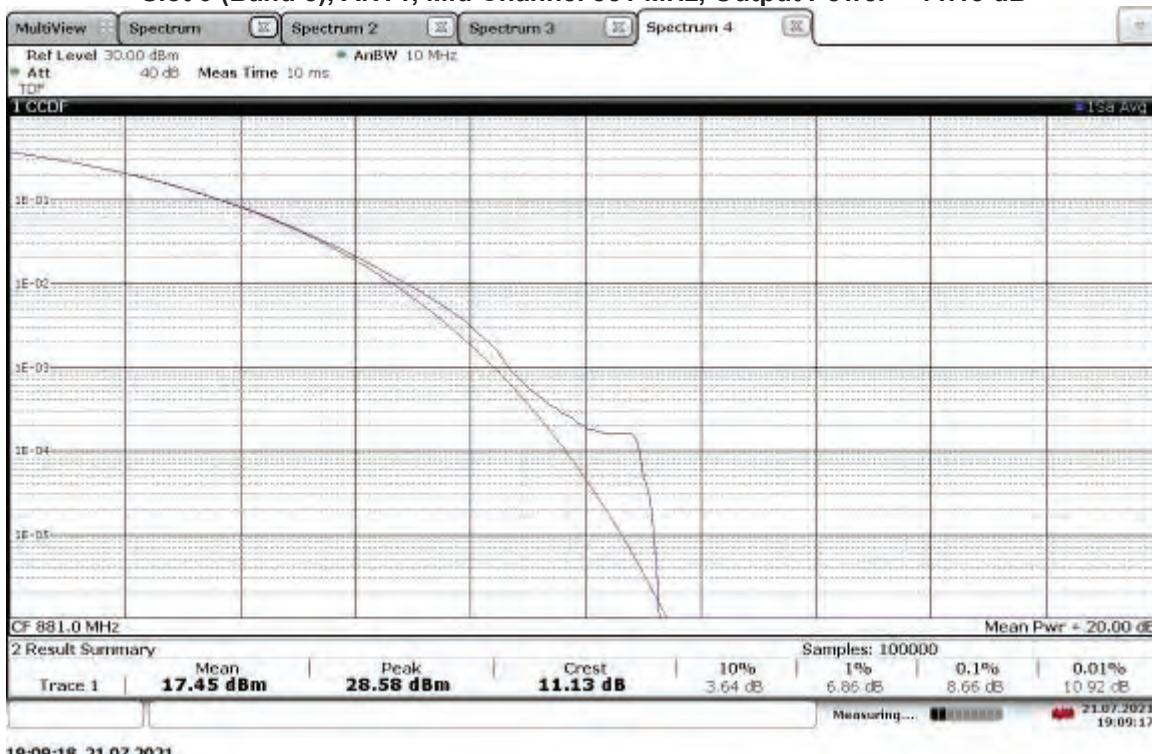


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 884 MHz, PAPR = 11.11 dB

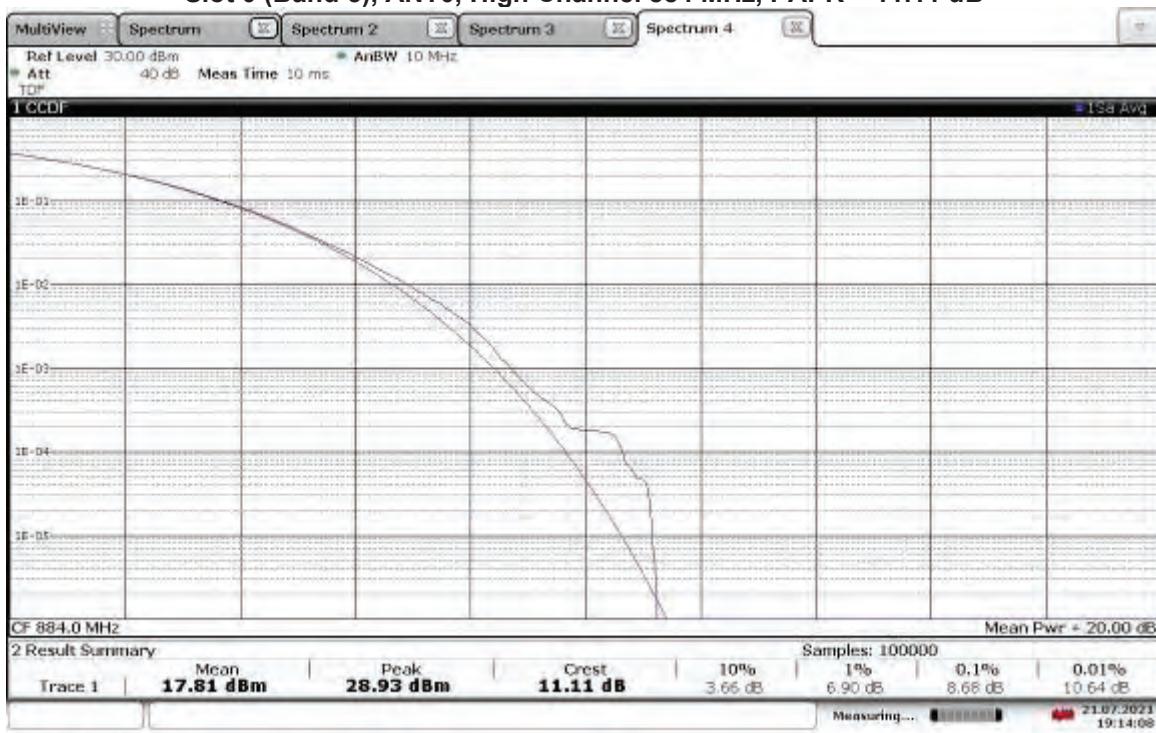

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 884 MHz, PAPR = 10.63 dB

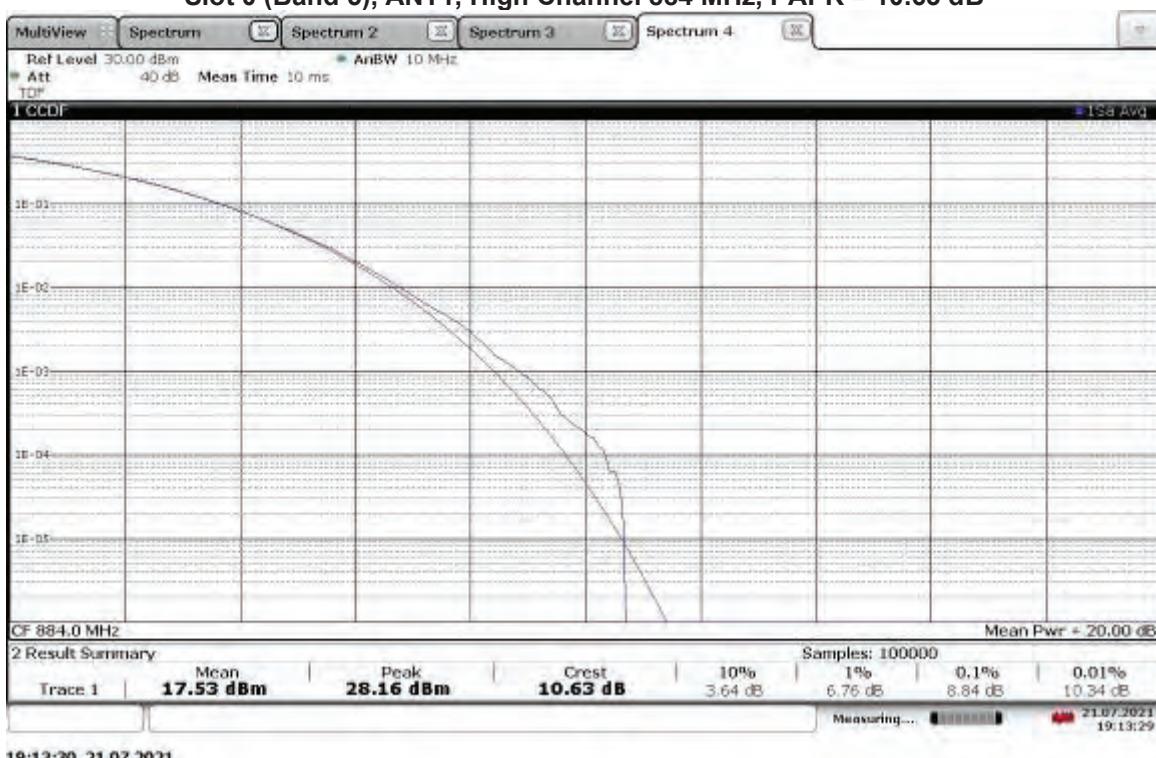


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANTO, Low Channel 871.5 MHz, PAPR = 9.72 dB

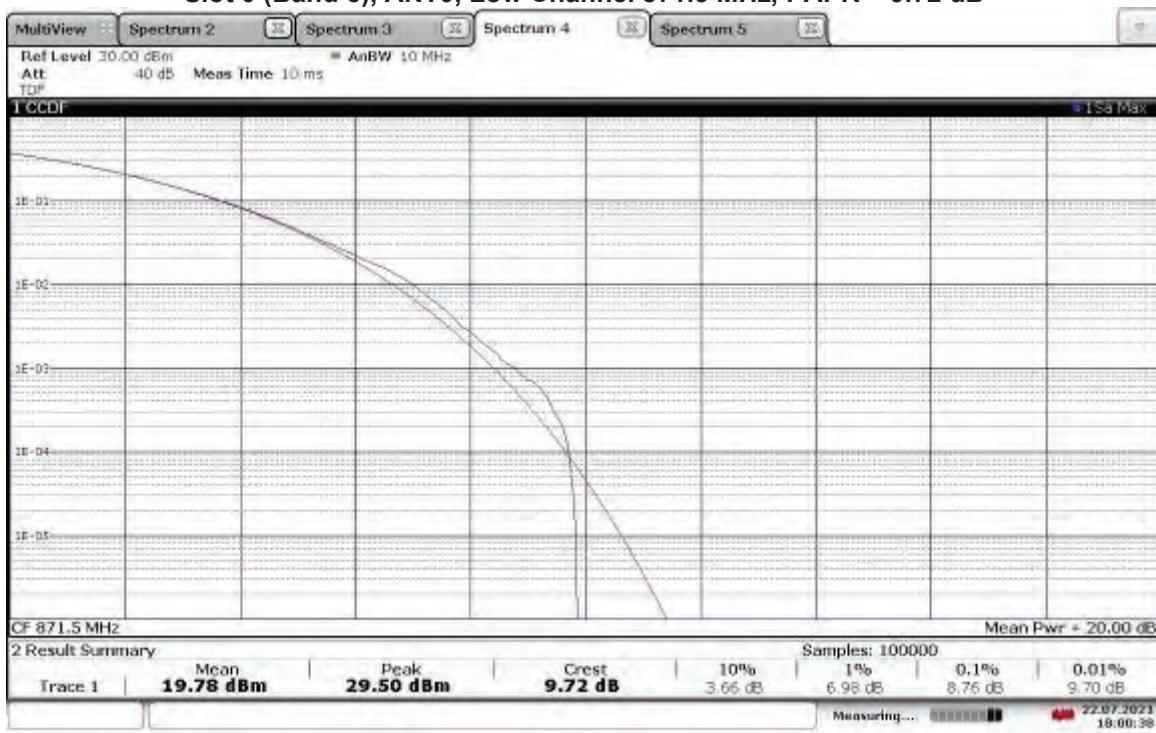


18:00:38 22.07.2021

TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 871.5 MHz, PAPR = 9.87 dB

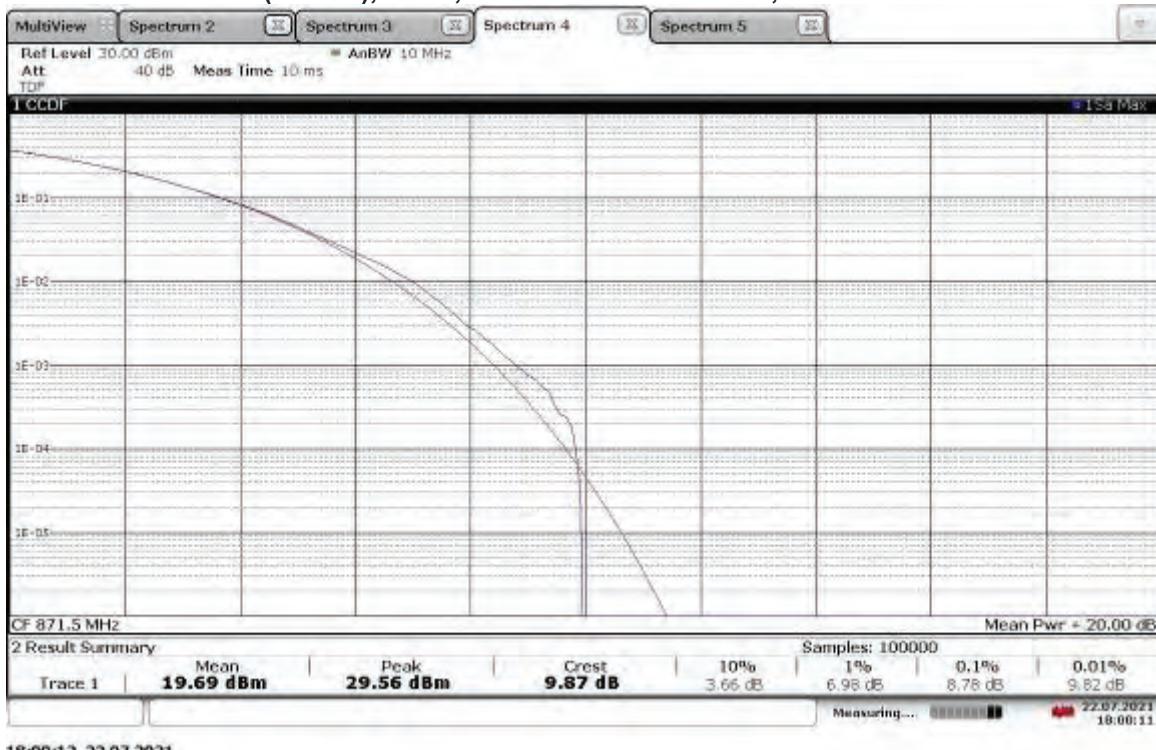


18:00:12 22.07.2021


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 9.69 dB

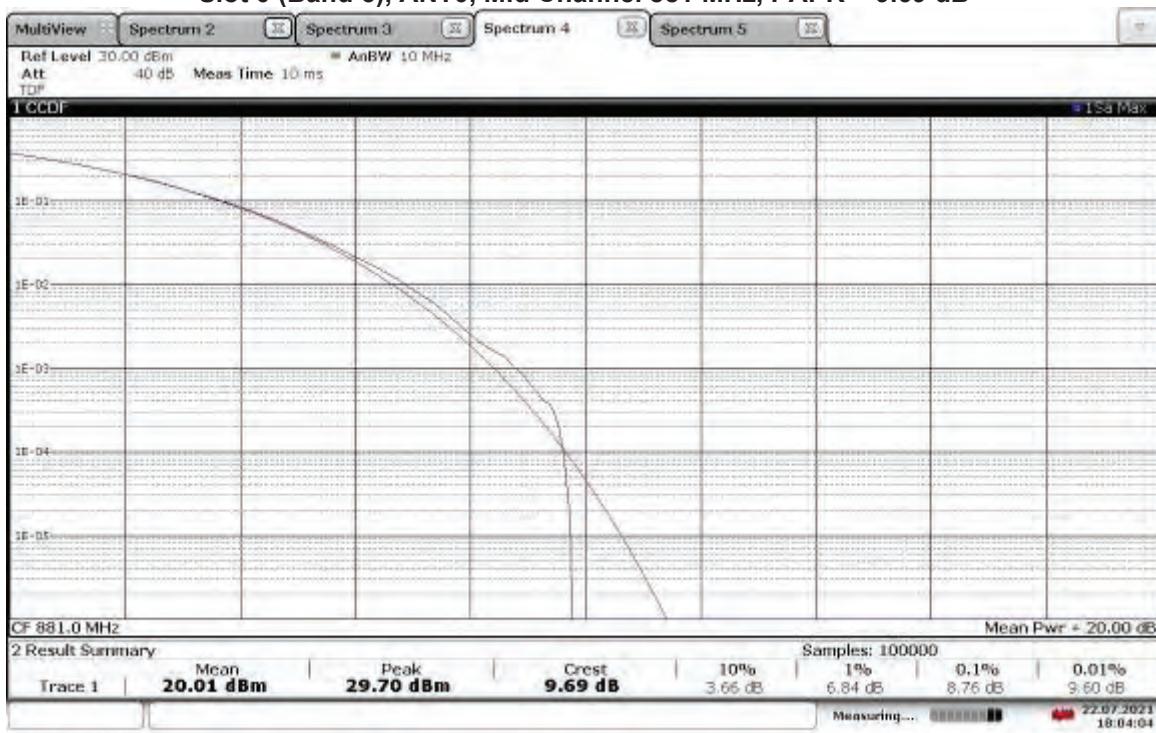


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 9.67 dB

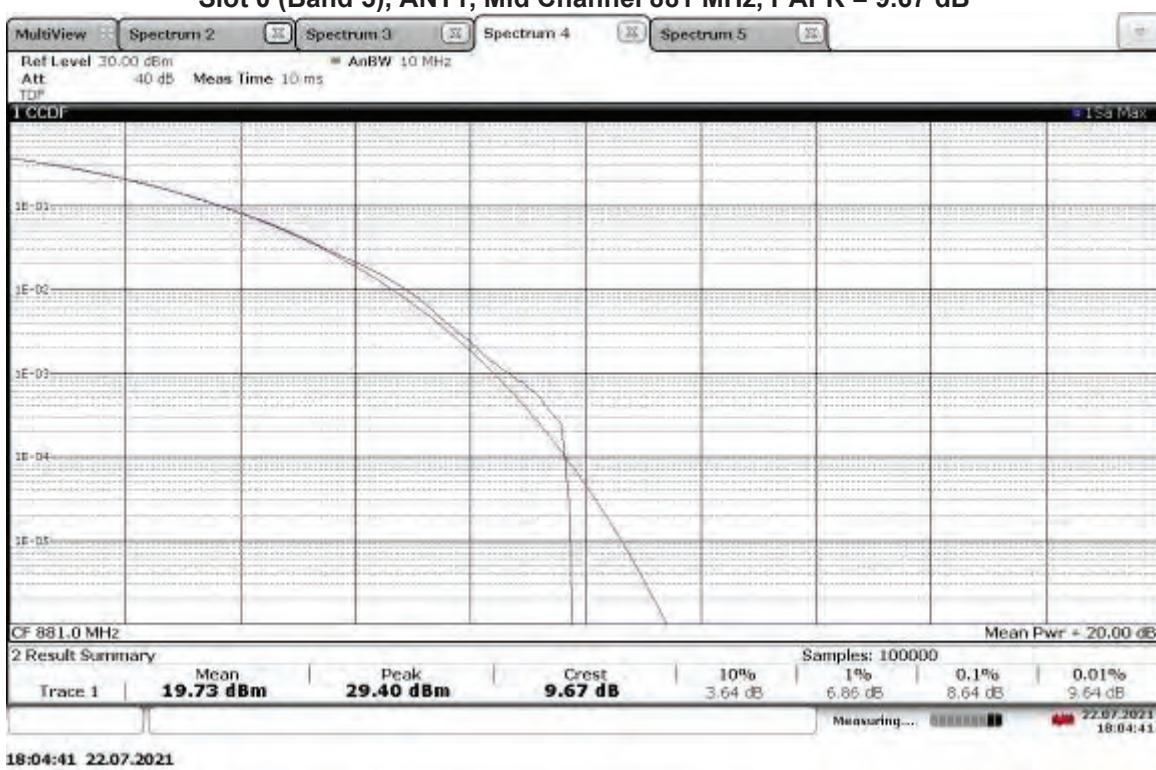


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 891.5 MHz, PAPR = 9.82 dB

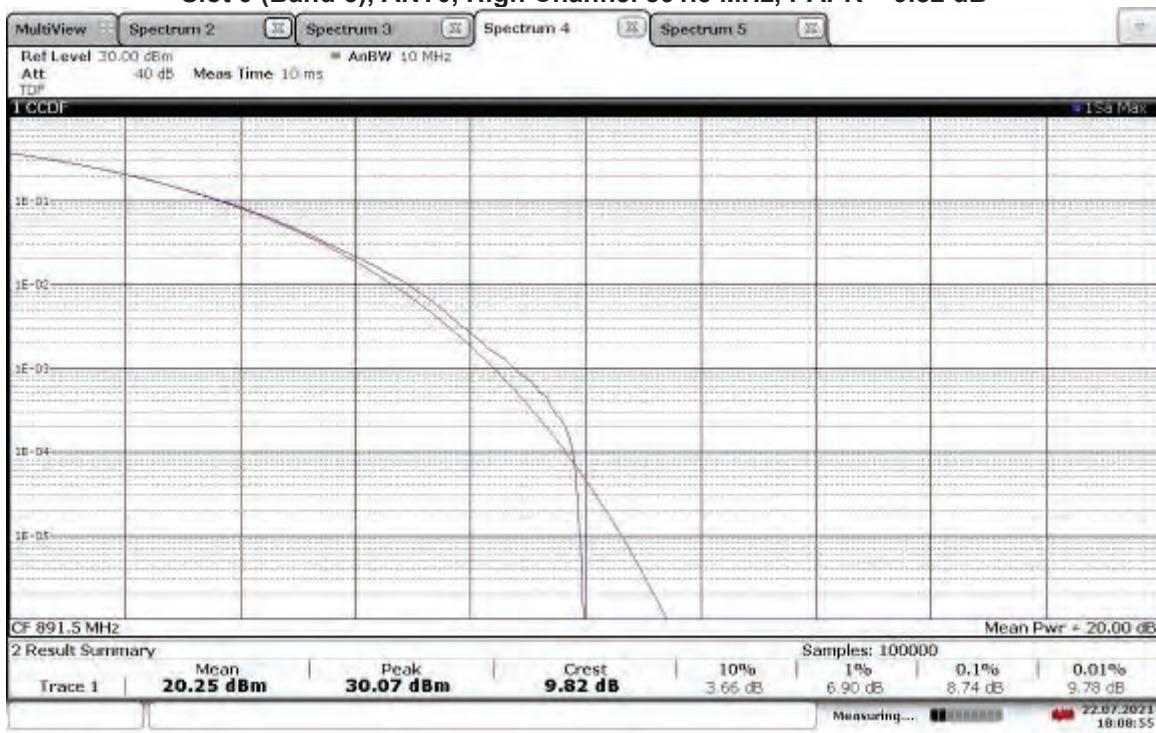


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 891.5 MHz, PAPR = 9.87 dB

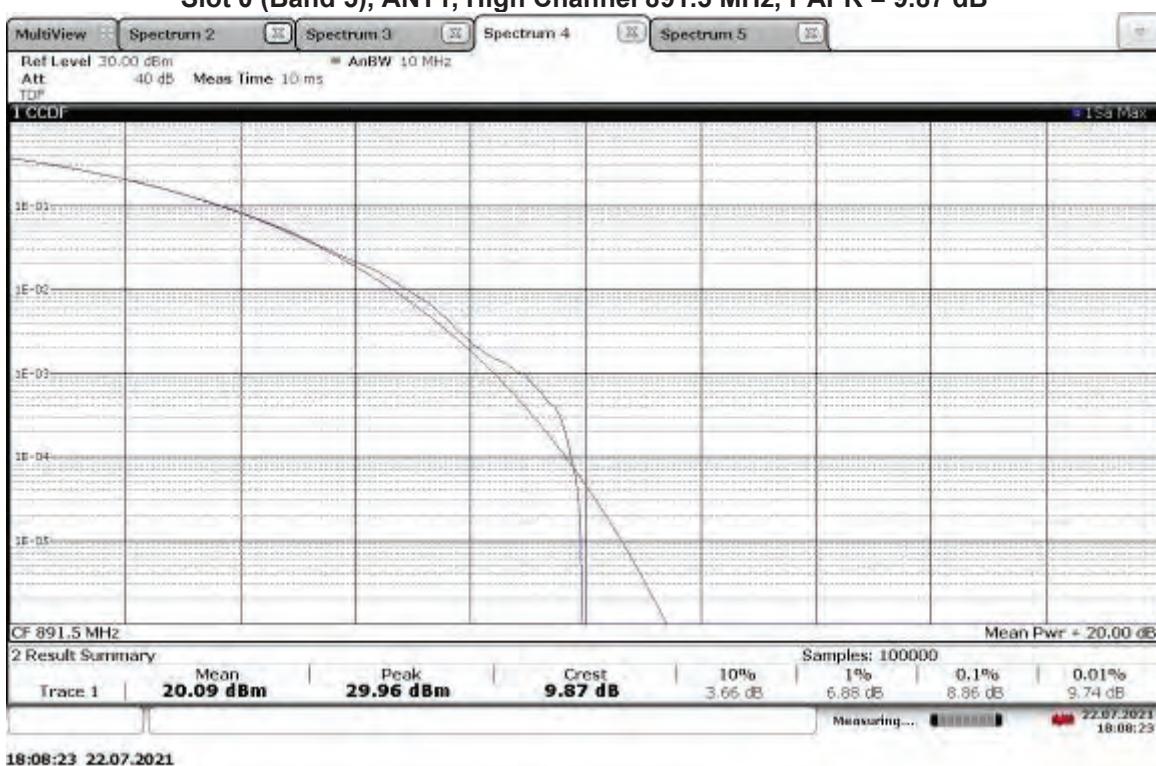


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 874 MHz, PAPR = 10.19 dB

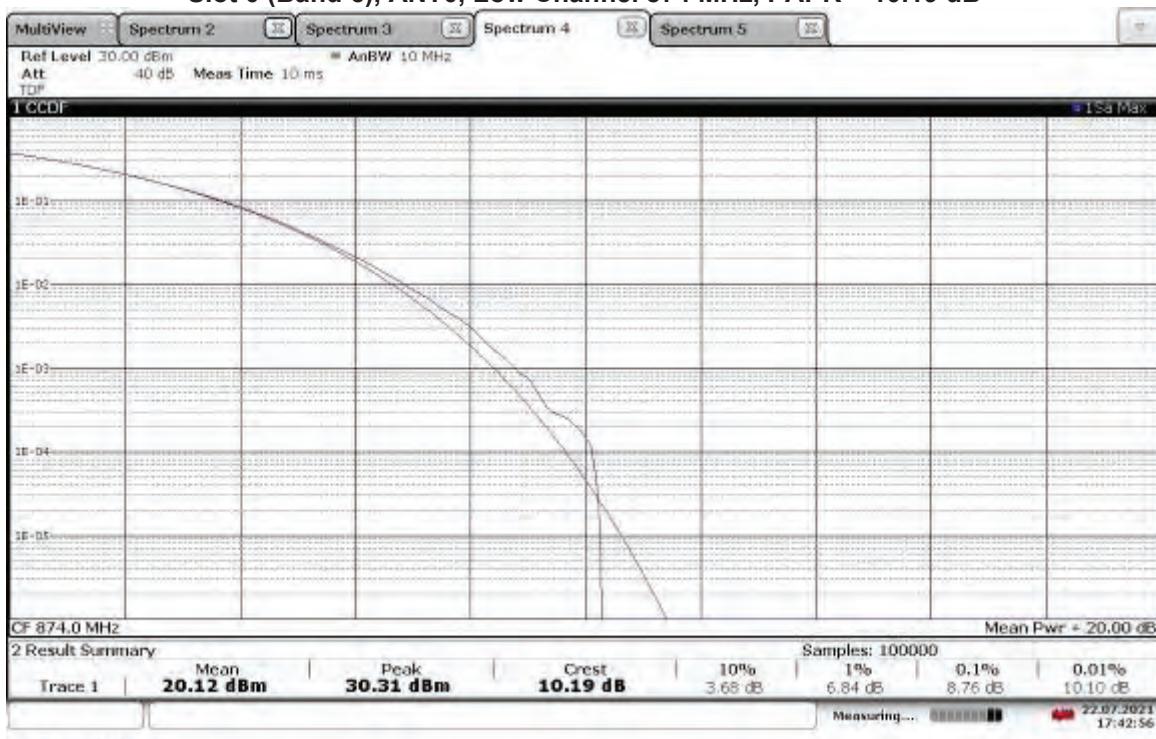


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 874 MHz, PAPR = 10.27 dB

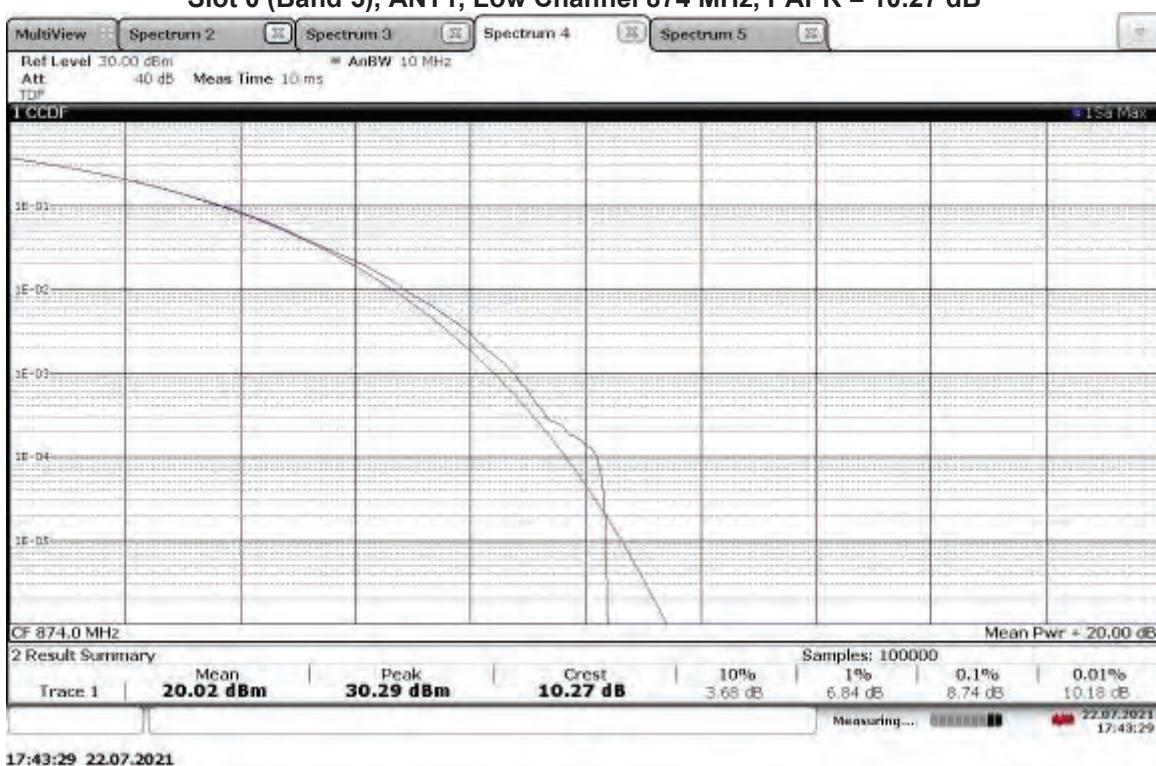


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 10.27 dB

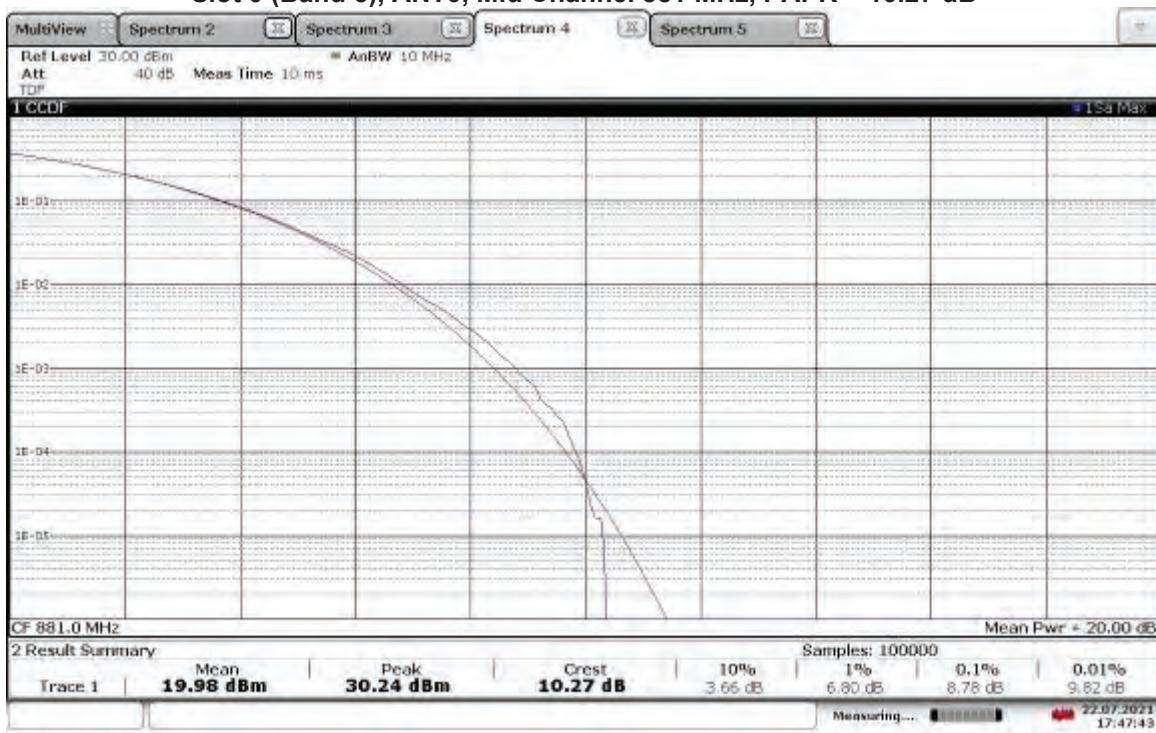


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 10.12 dB

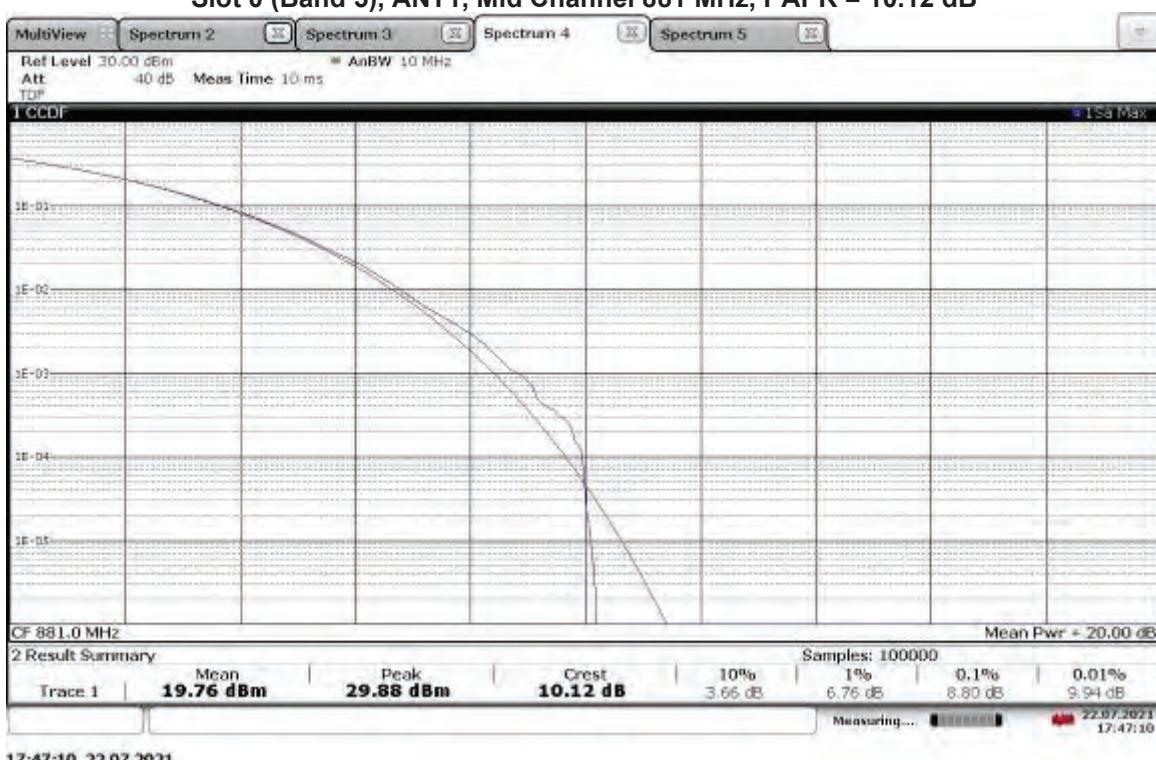


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 889 MHz, PAPR = 10.33 dB

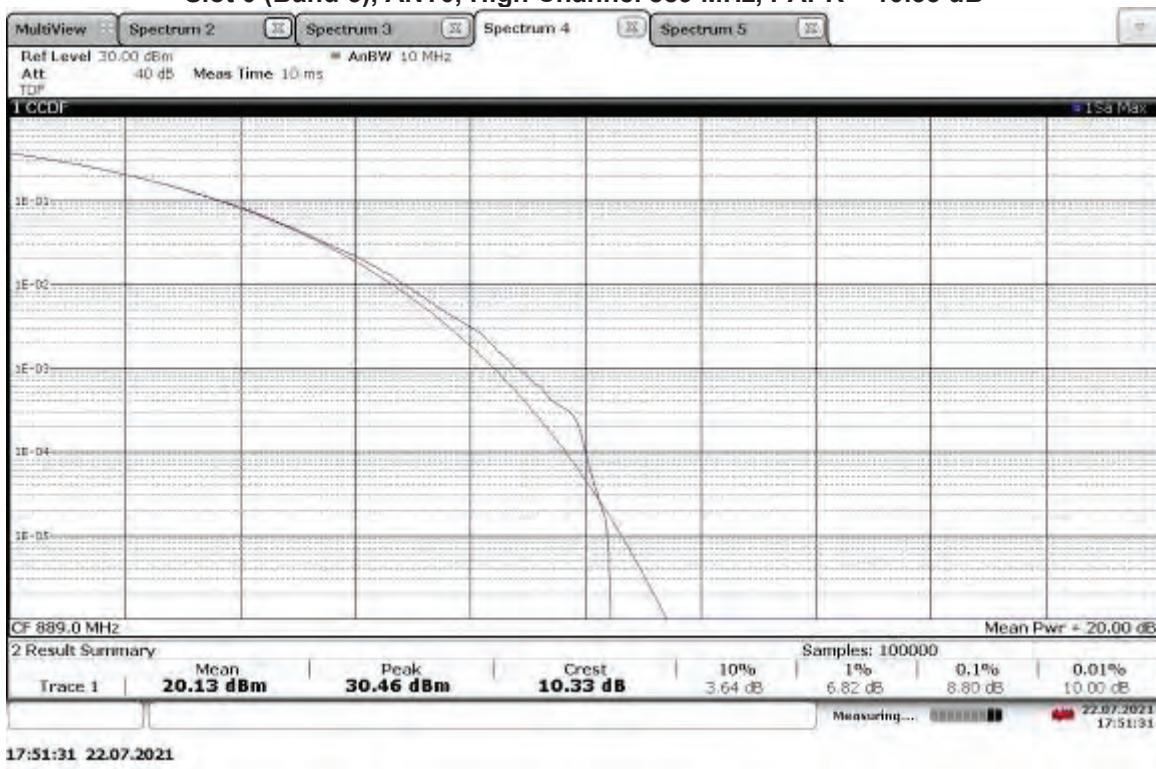


TM3.2-16QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 889 MHz, PAPR = 10.40 dB

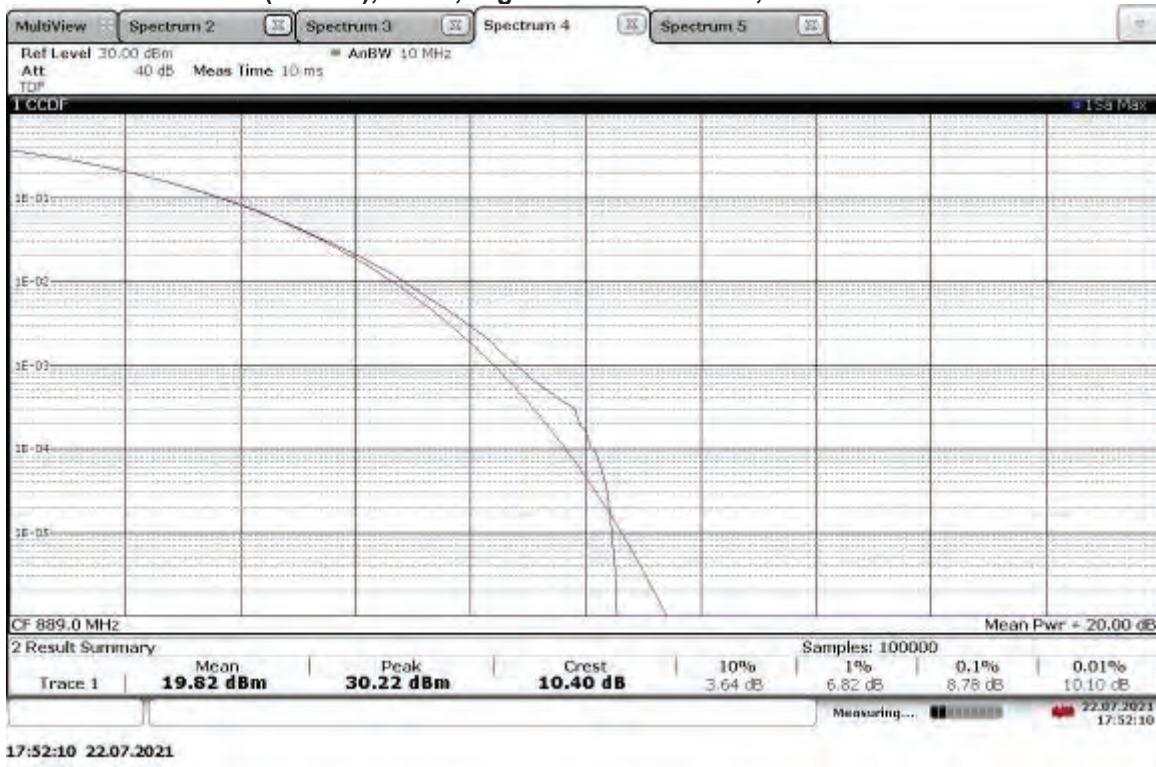


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 876.5 MHz, PAPR = 11.12 dB

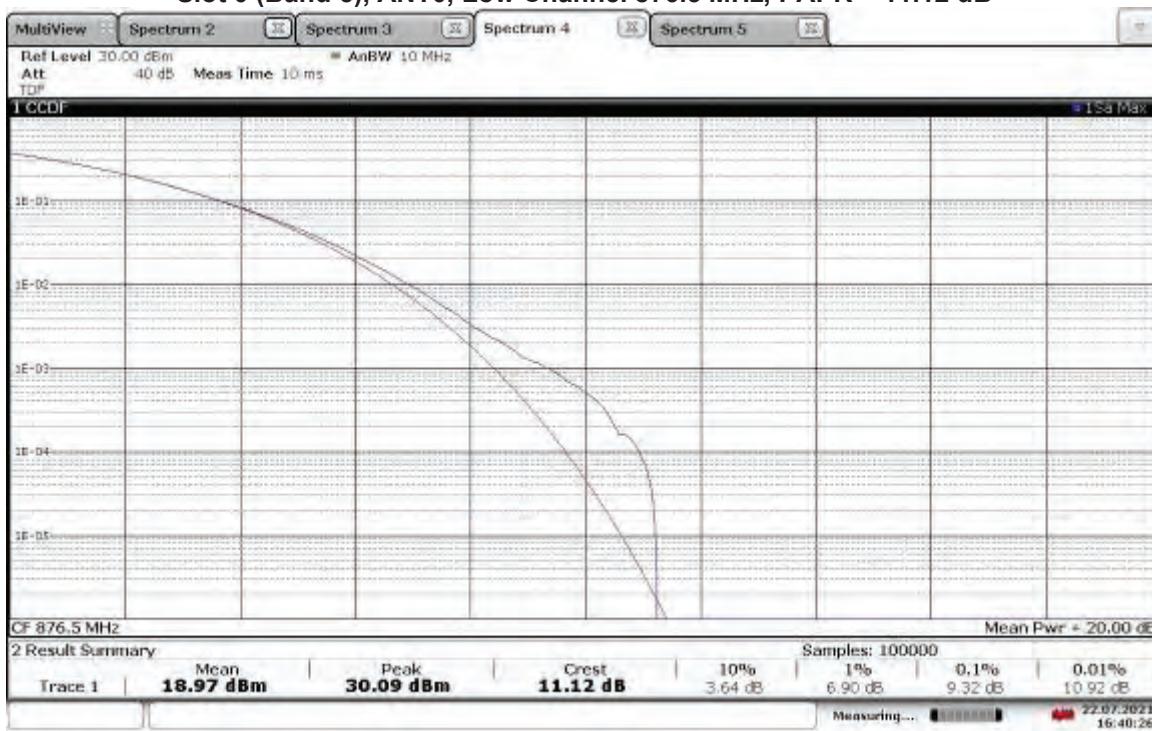


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 876.5 MHz, PAPR = 11.24 dB

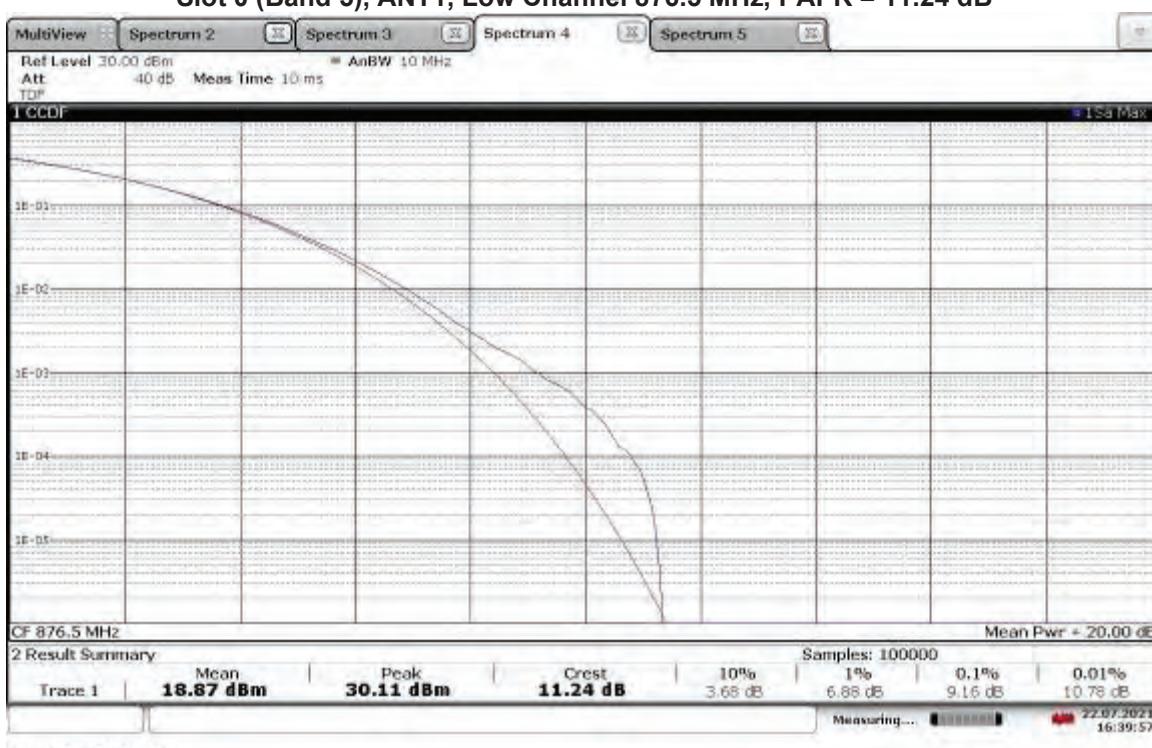


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 11.19 dB

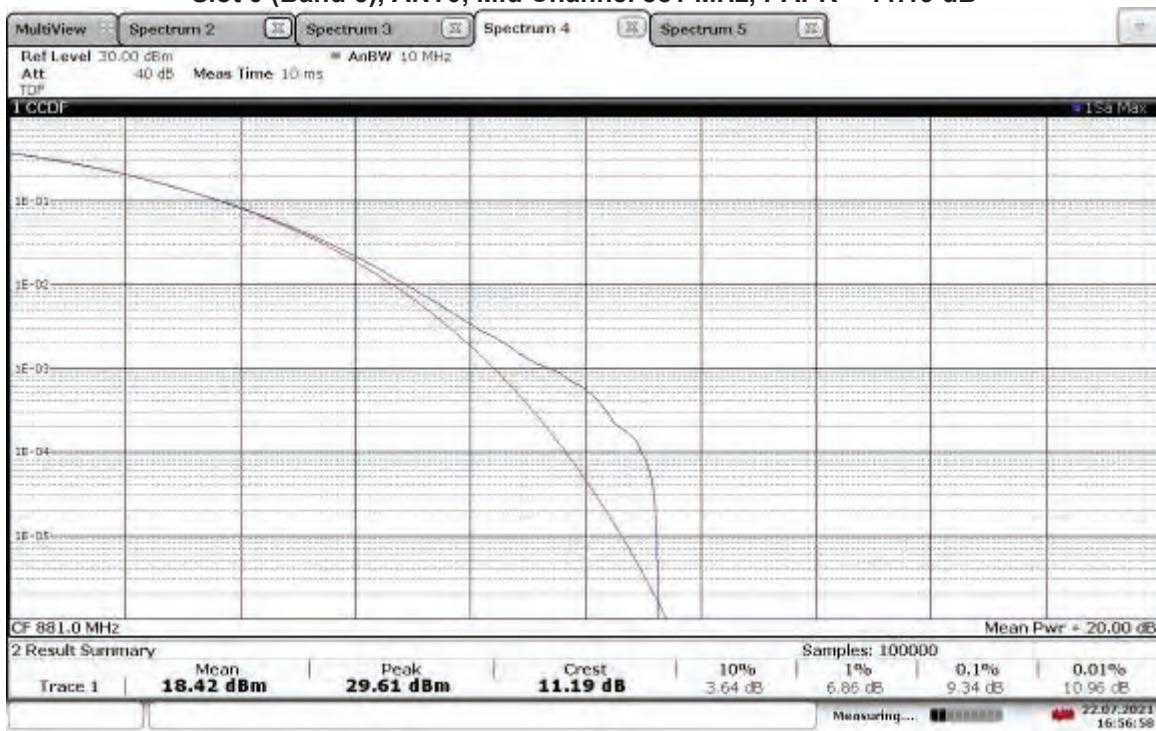


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 11.38 dB

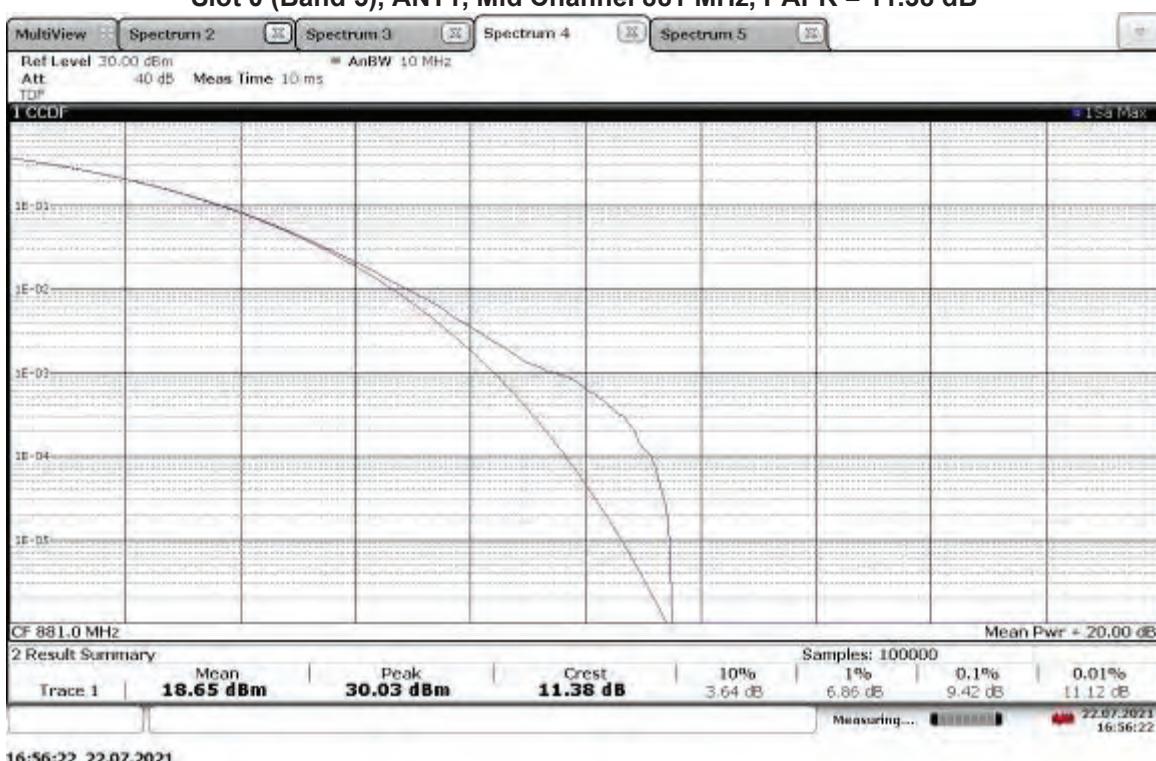


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 886.5 MHz, PAPR = 11.11 dB

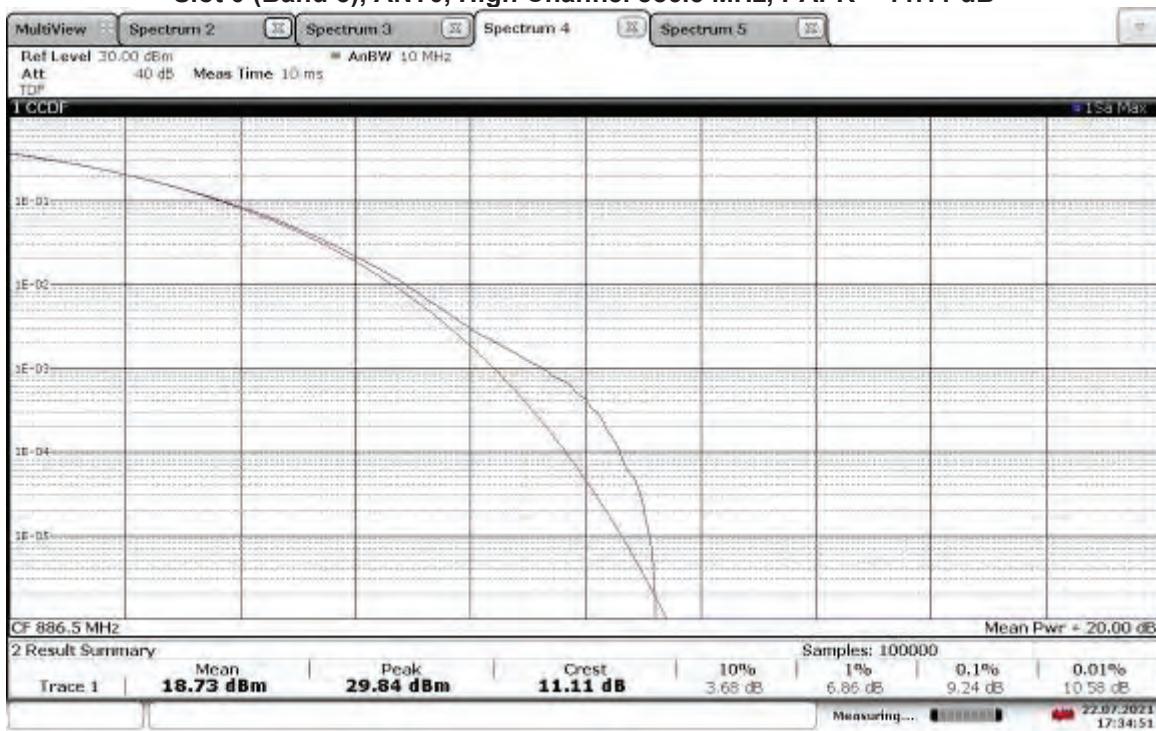


TM3.2-16QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, PAPR = 11.28 dB

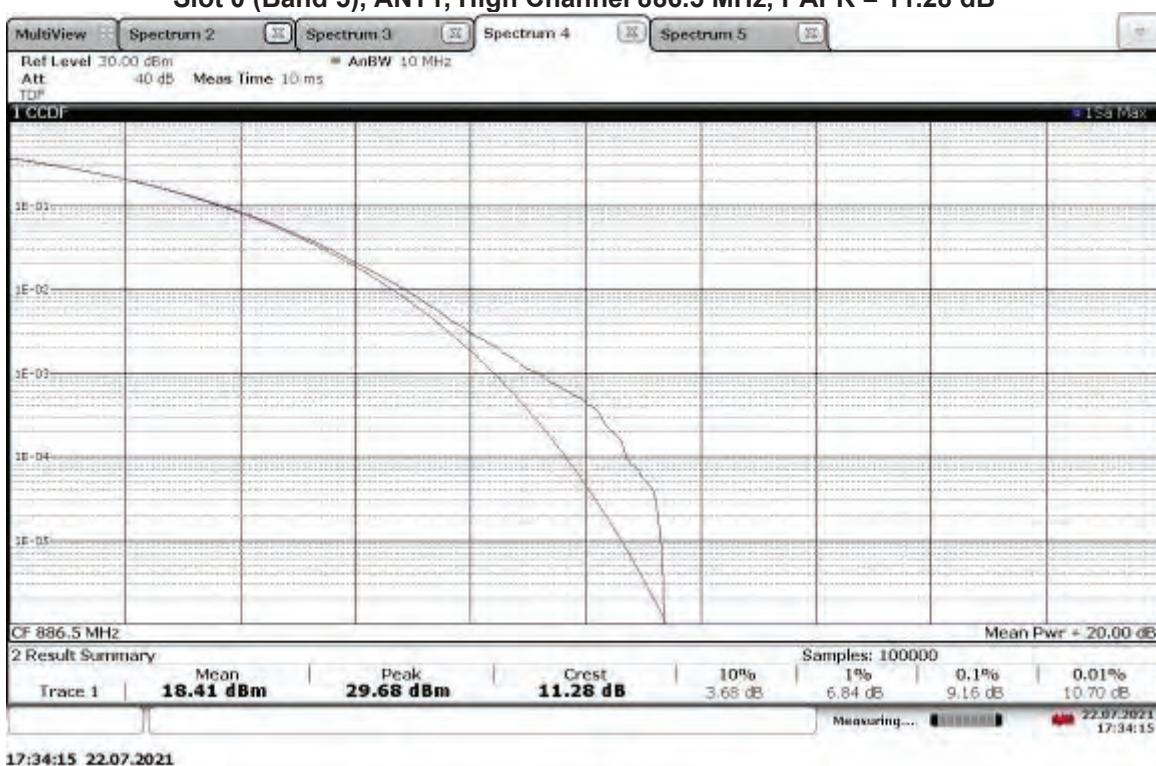


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 879 MHz, PAPR = 10.45 dB

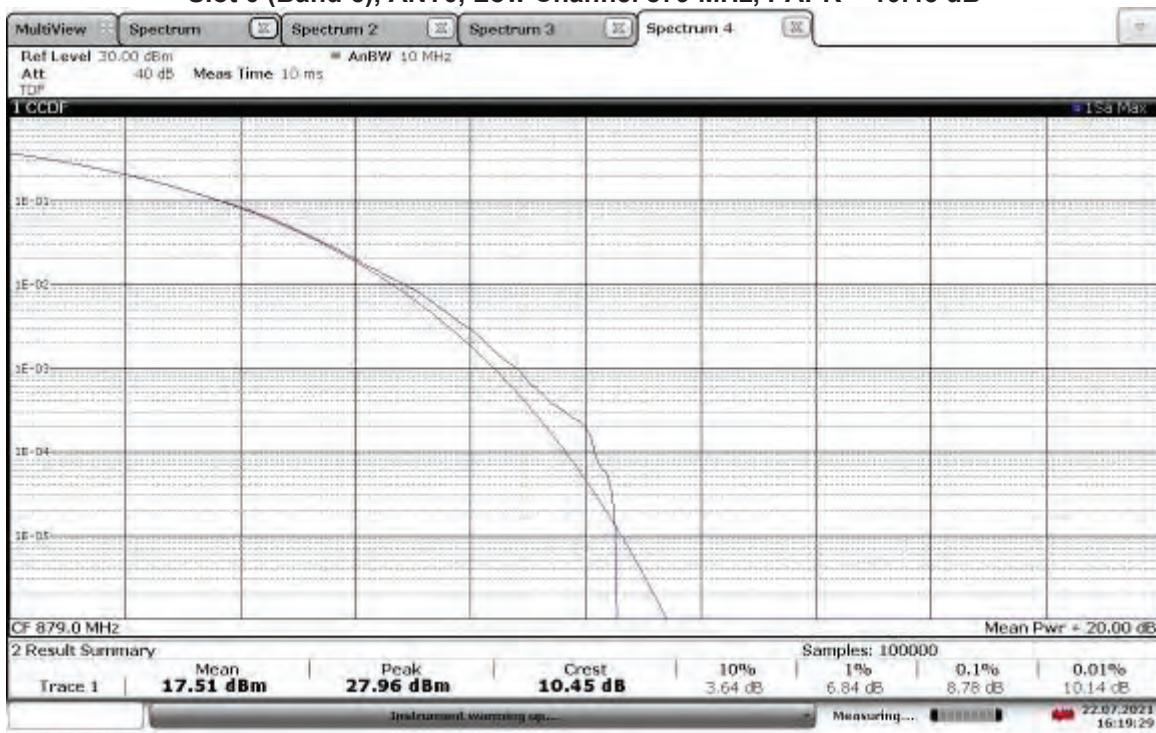


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 879 MHz, PAPR = 10.19 dB

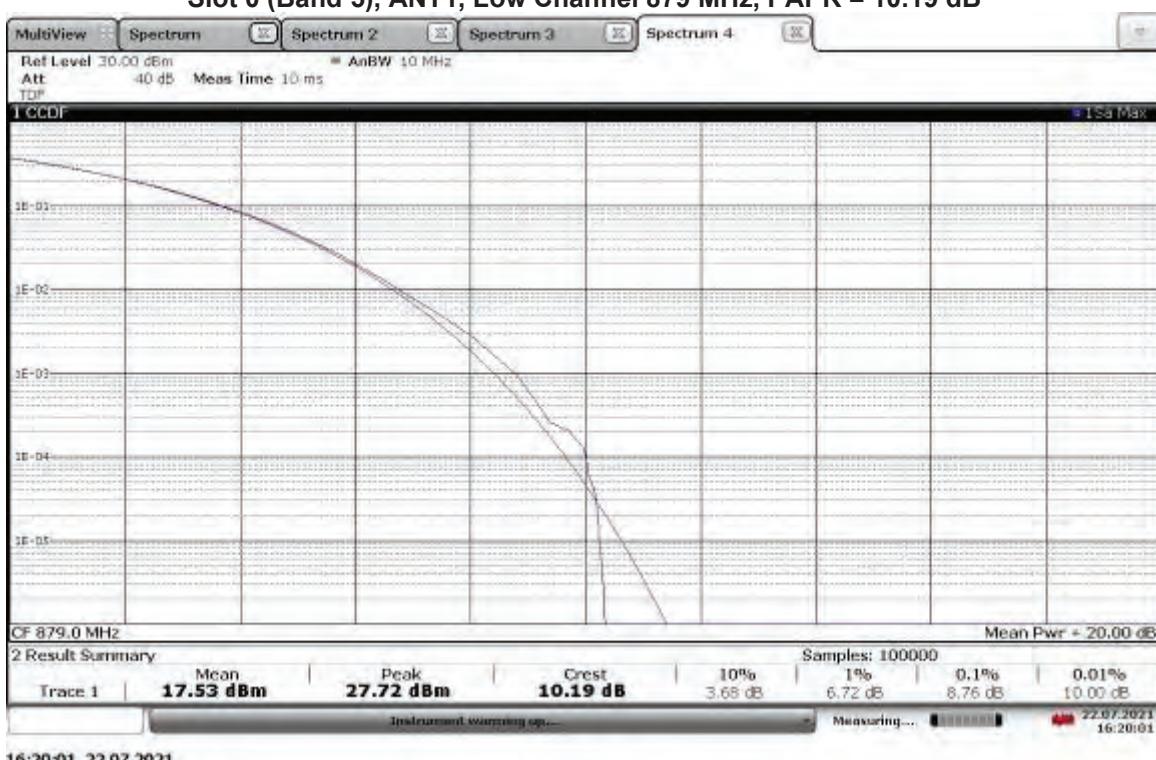


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 10.34 dB

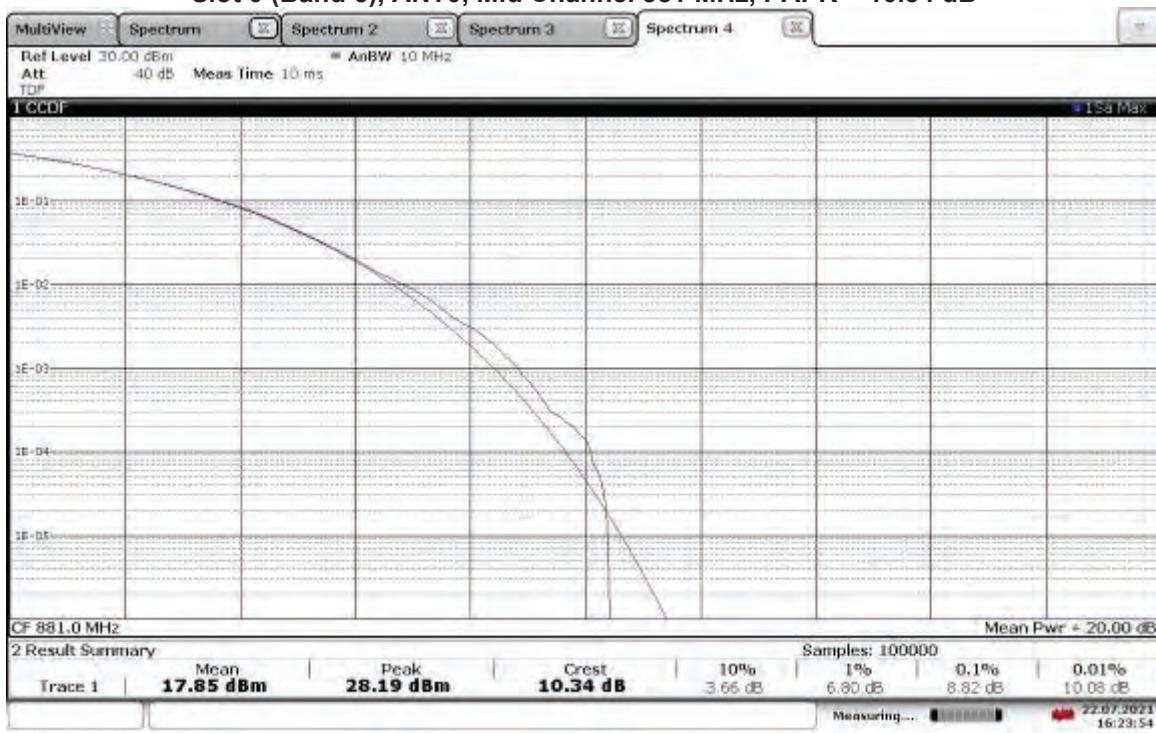


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 10.34 dB

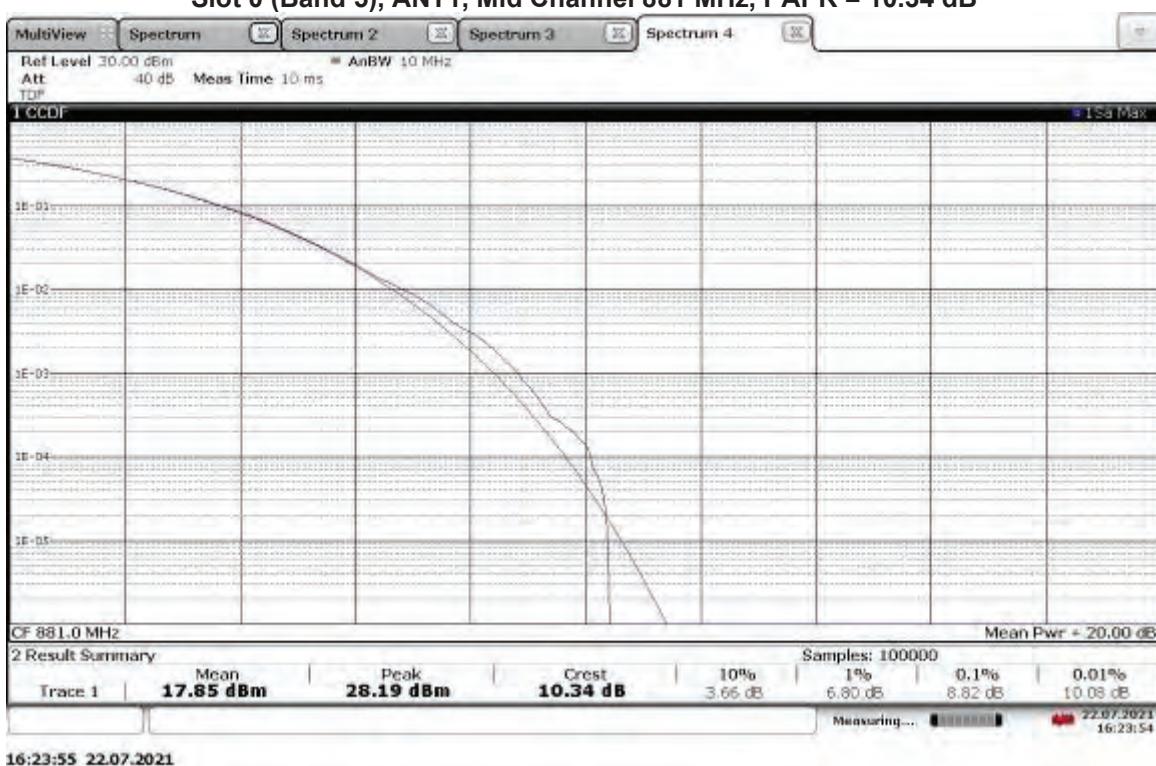


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 884 MHz, PAPR = 10.41 dB

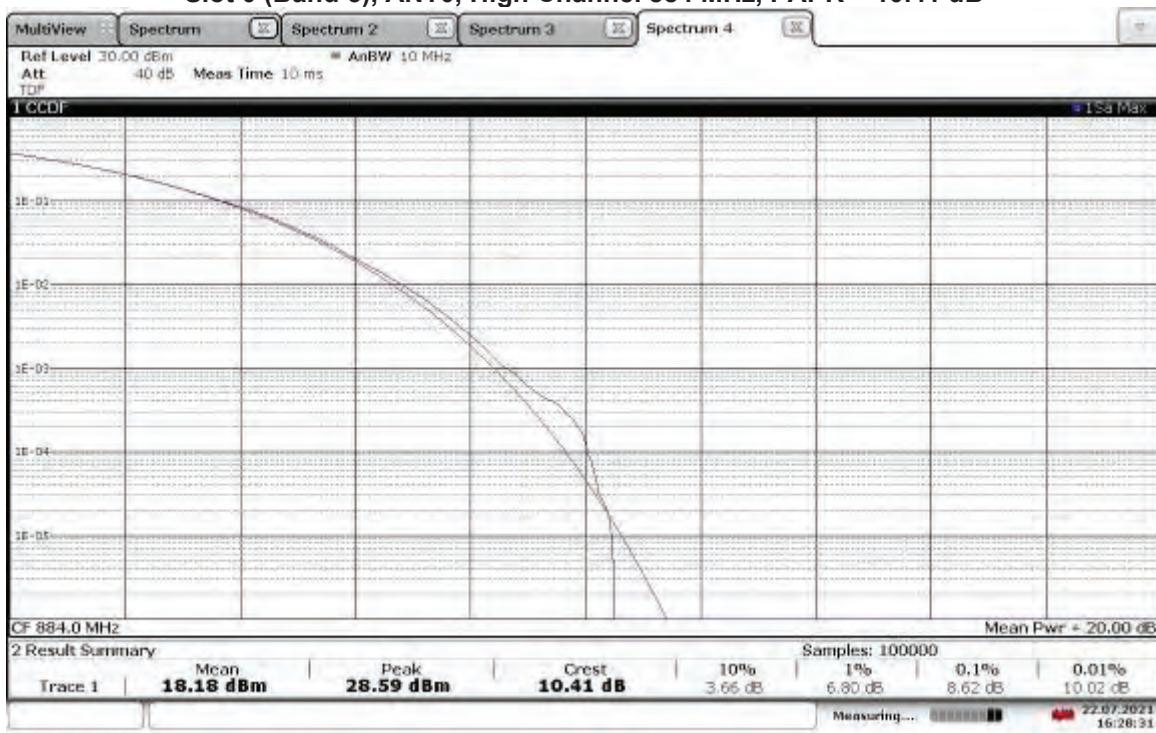


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 884 MHz, PAPR = 10.22 dB

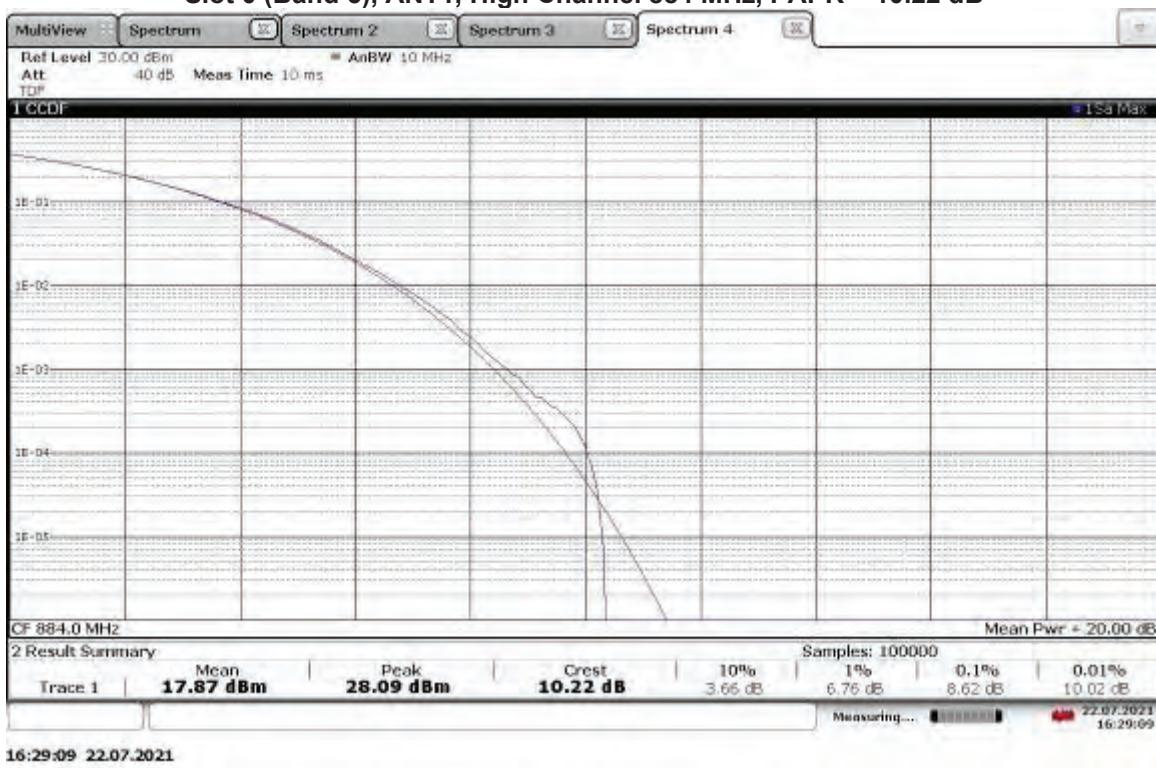


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 871.5 MHz, PAPR = 10.22 dB

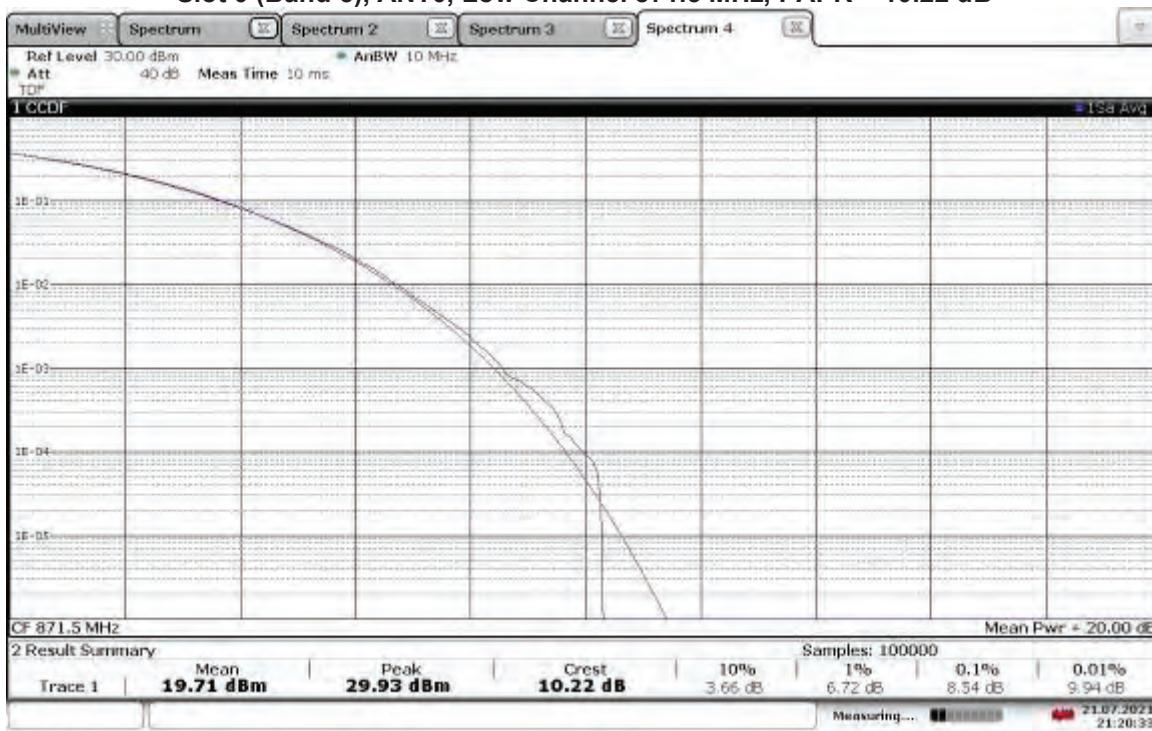


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 871.5 MHz, PAPR = 10.37 dB

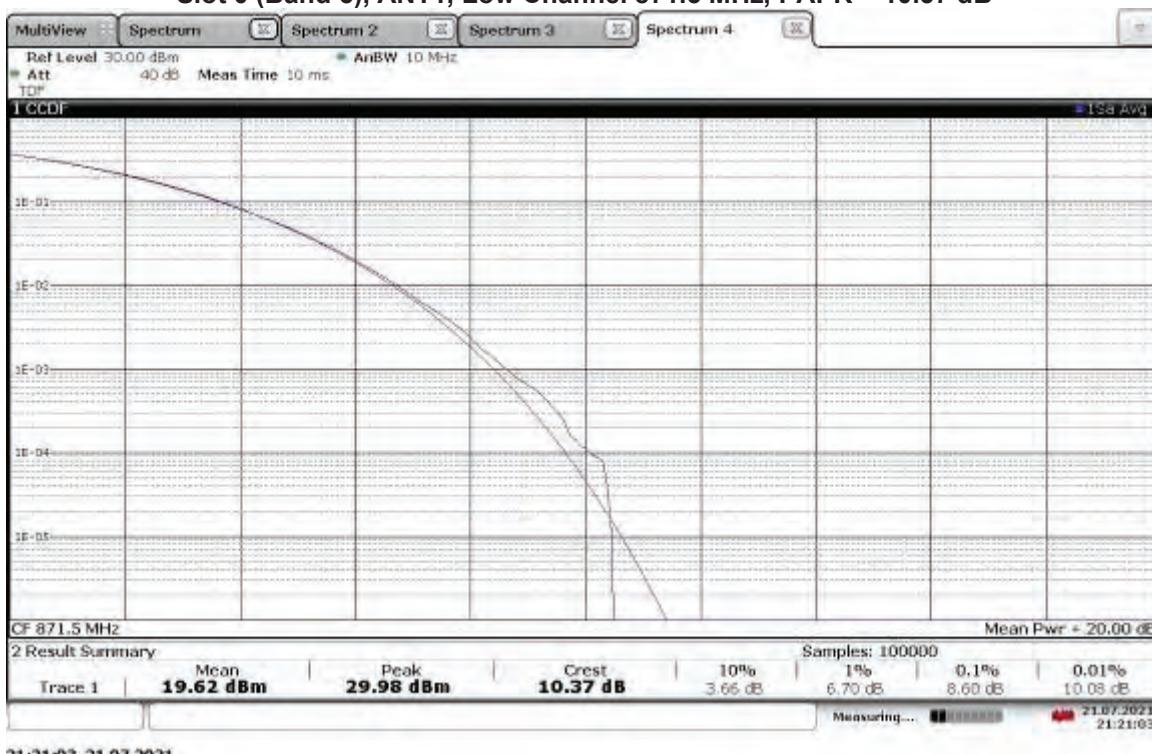


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 10.15 dB

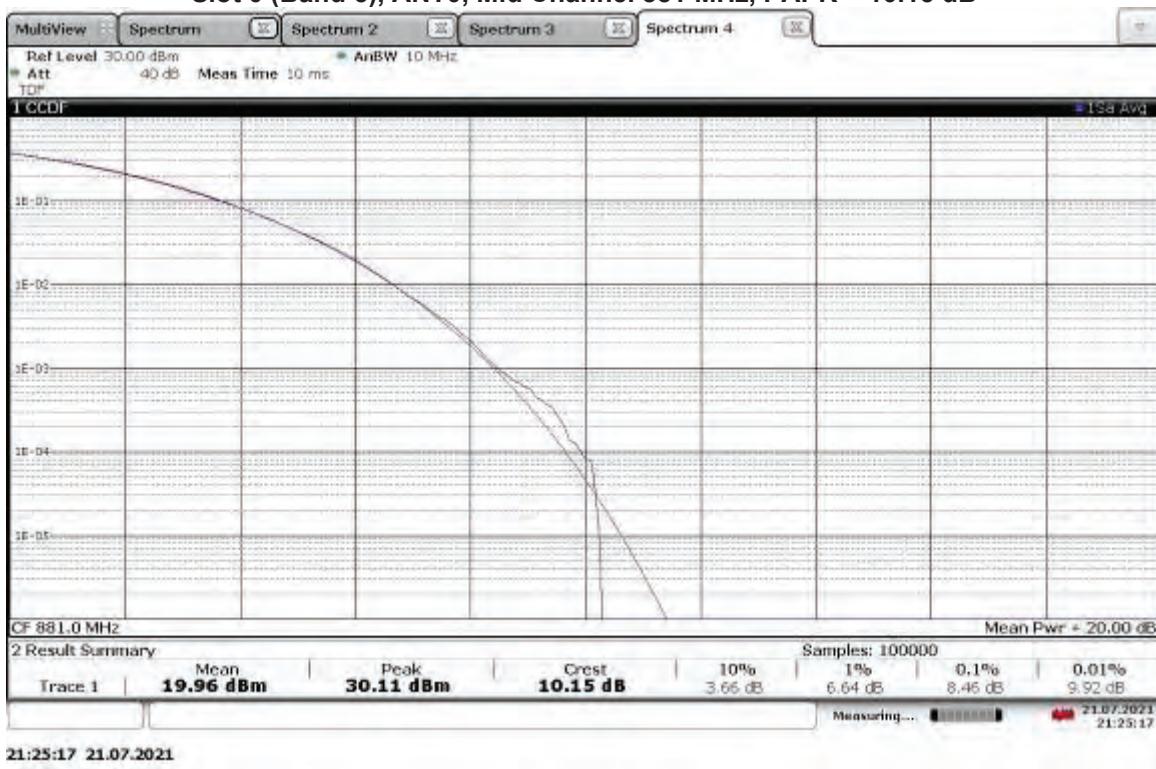


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 10.19 dB

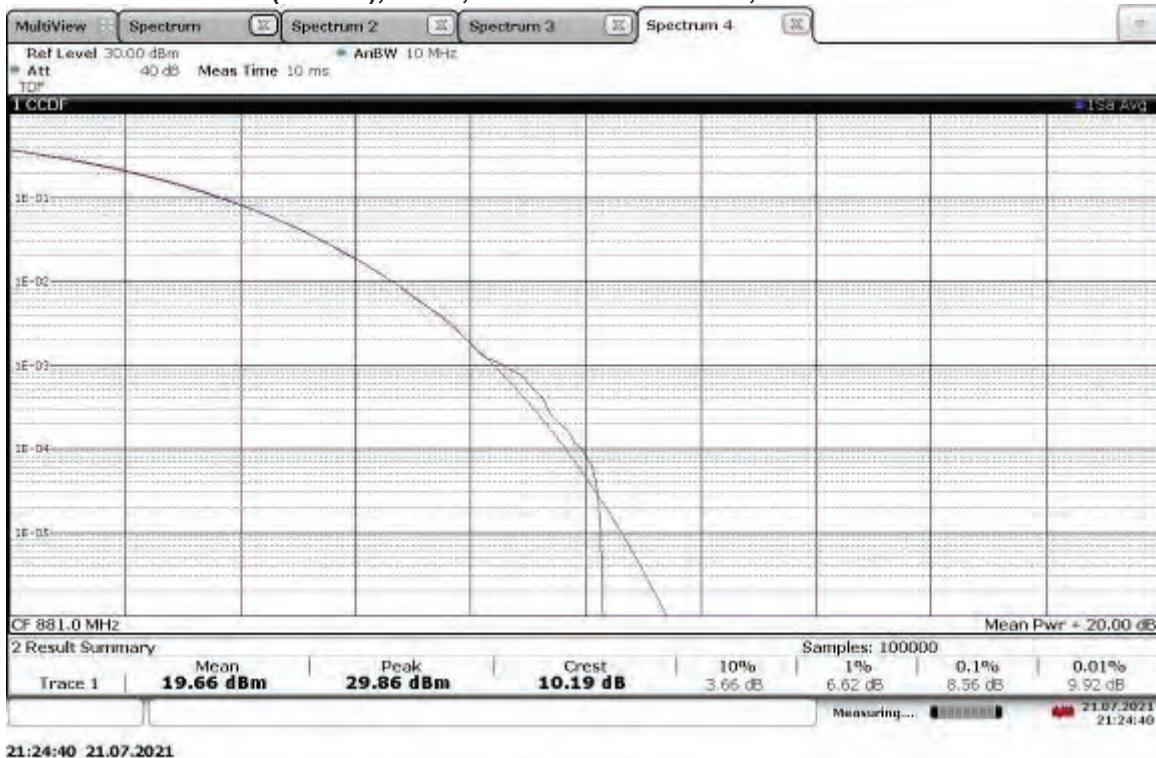


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 891.5 MHz, PAPR = 10.10 dB

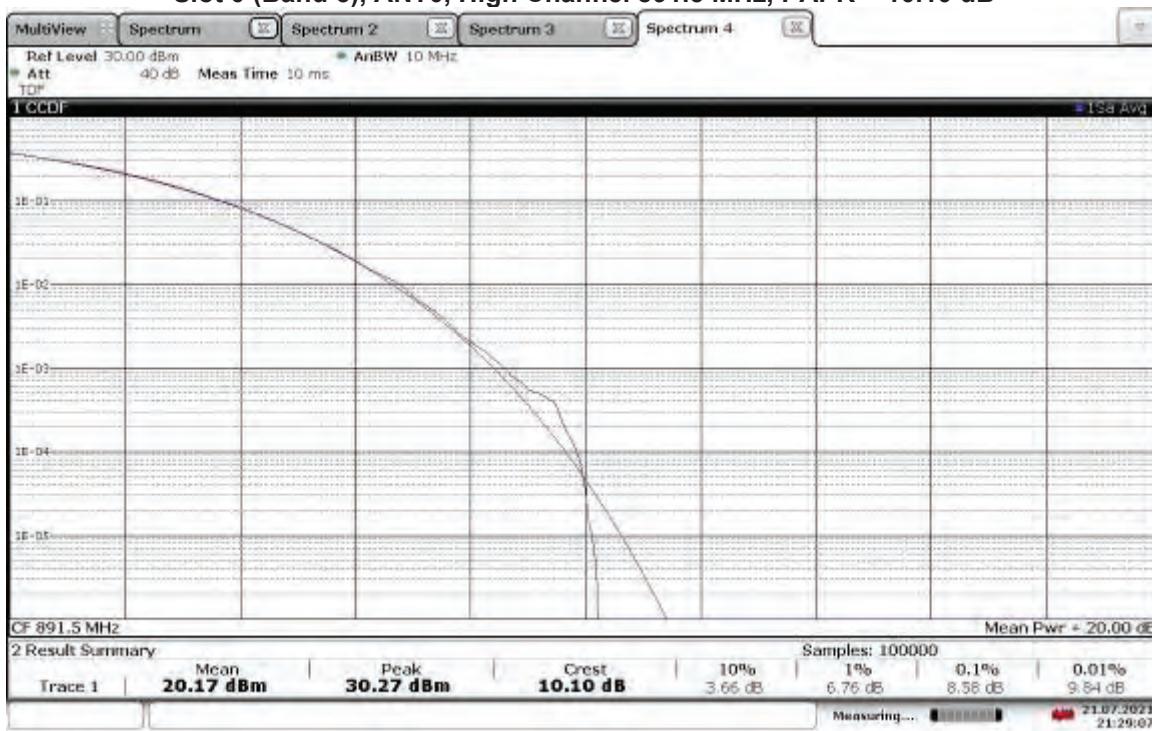


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 891.5 MHz, PAPR = 10.23 dB

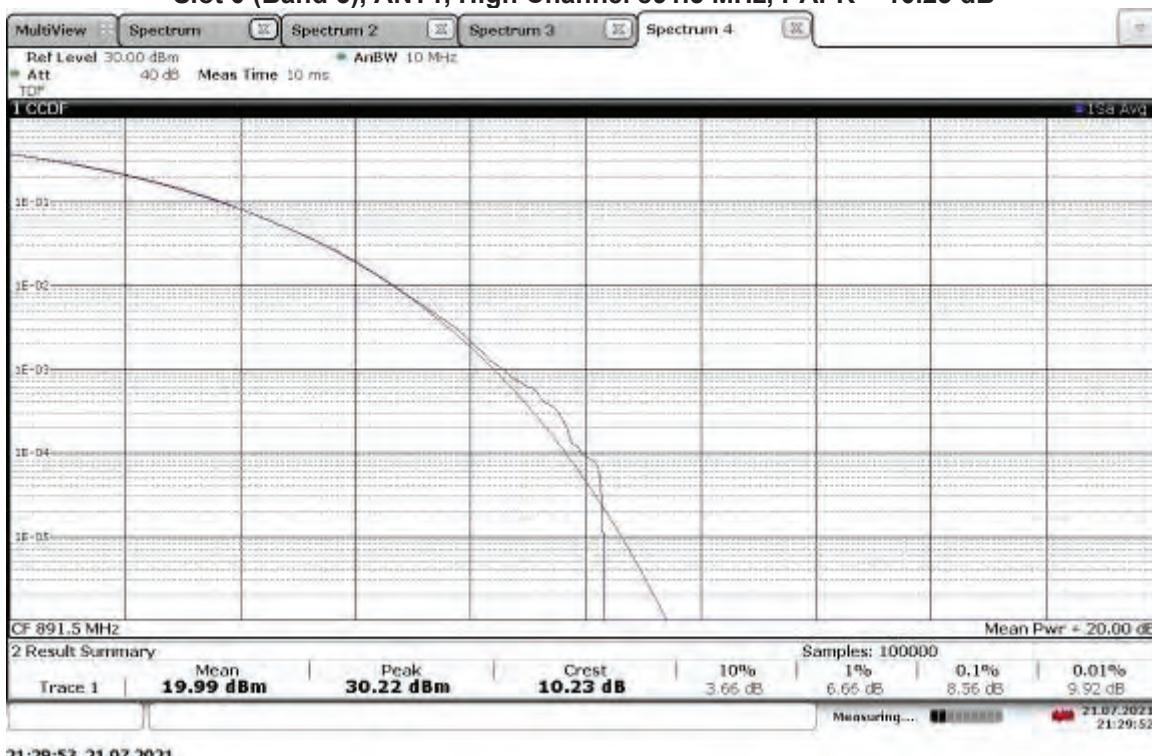


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 874 MHz, PAPR = 10.12 dB

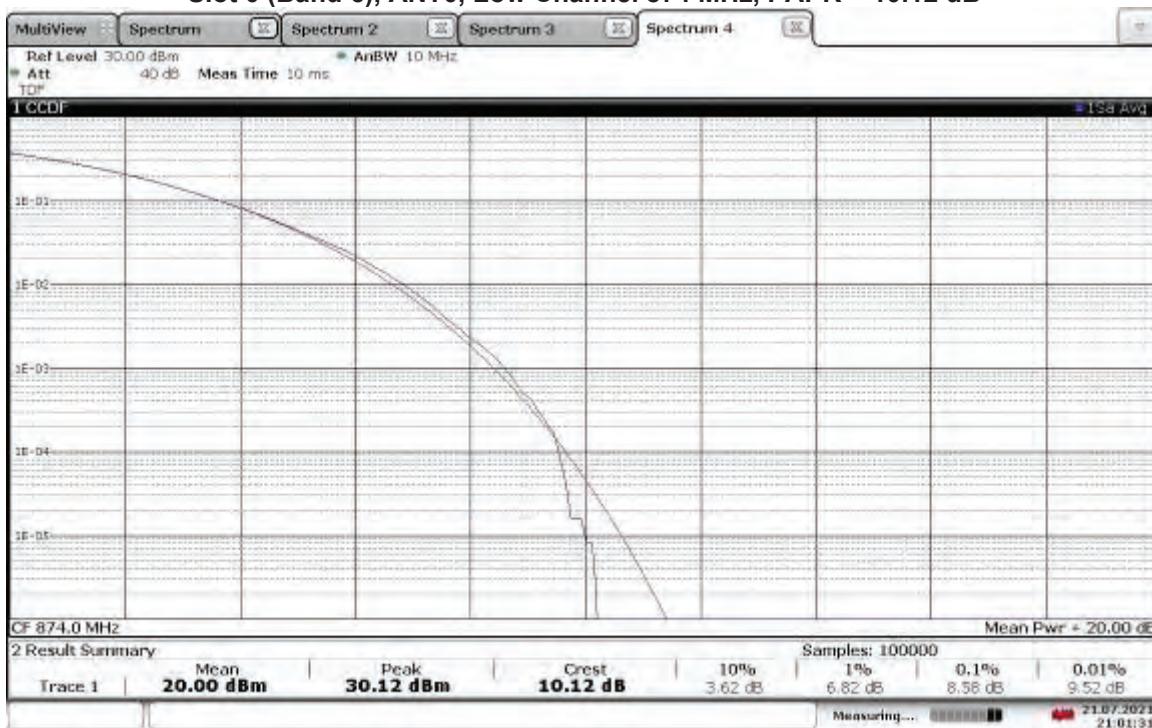


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 874 MHz, PAPR = 10.20 dB

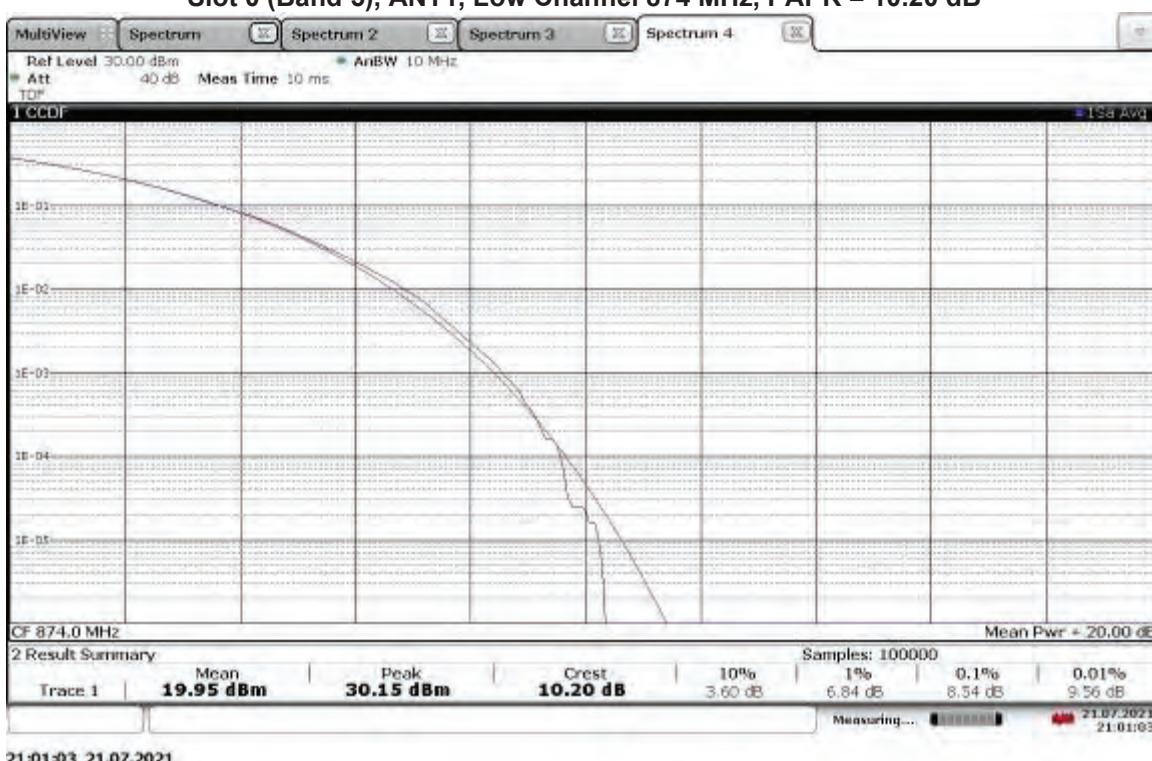


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 9.59 dB

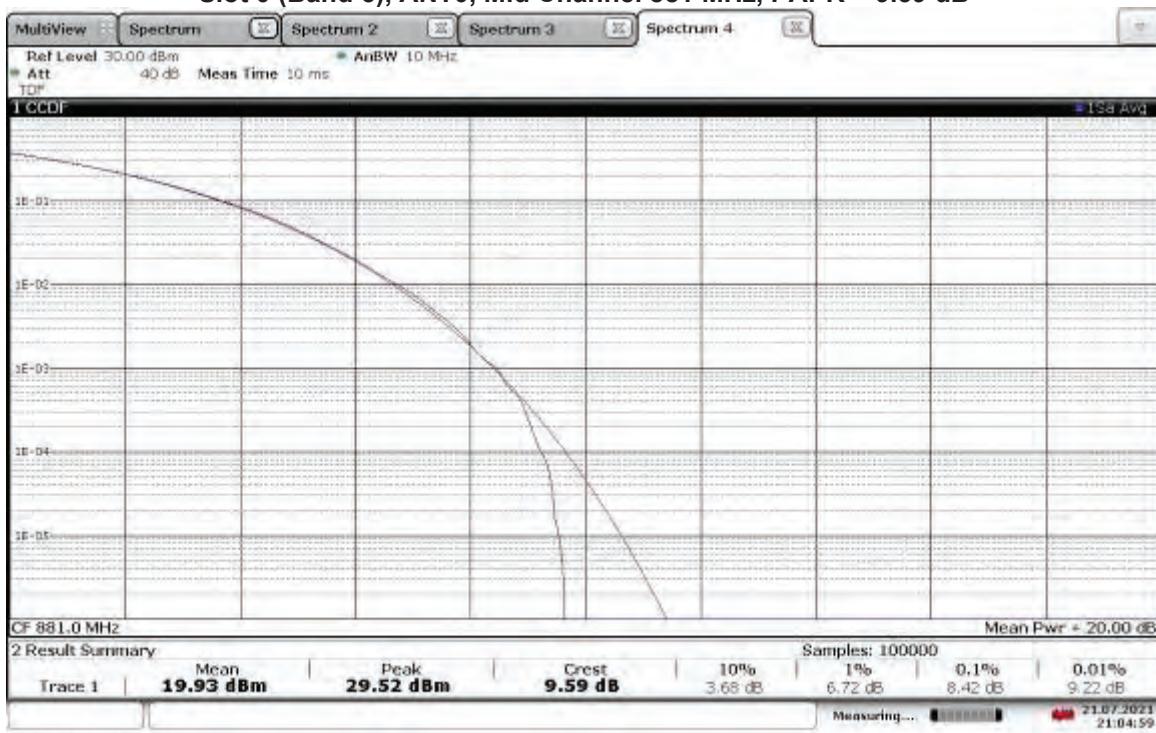


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 10.25 dB

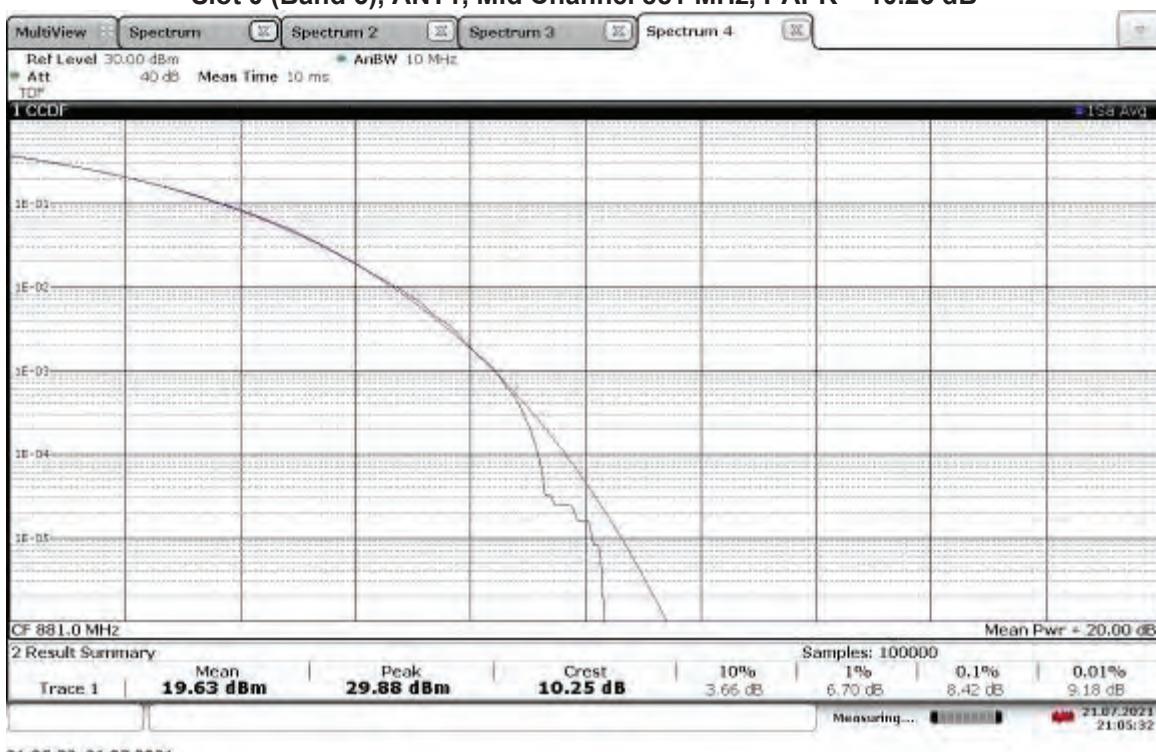


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 889 MHz, PAPR = 10.06 dB

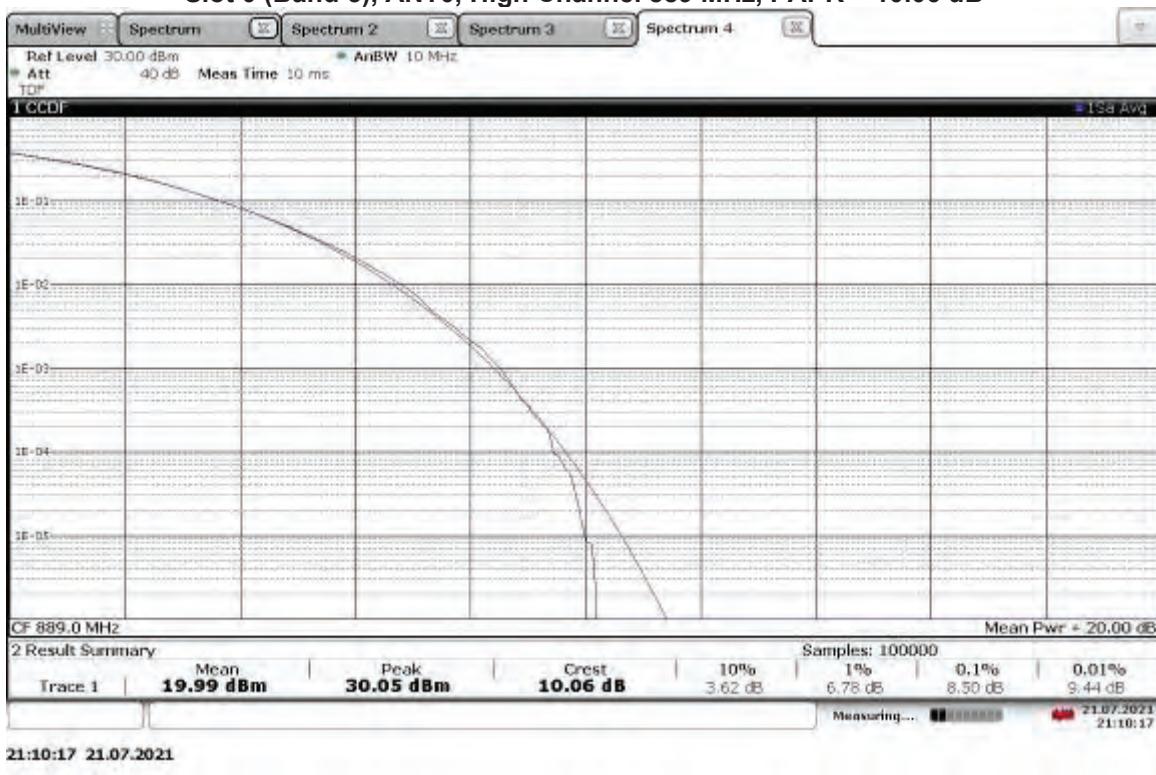


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 889 MHz, PAPR = 10.41 dB

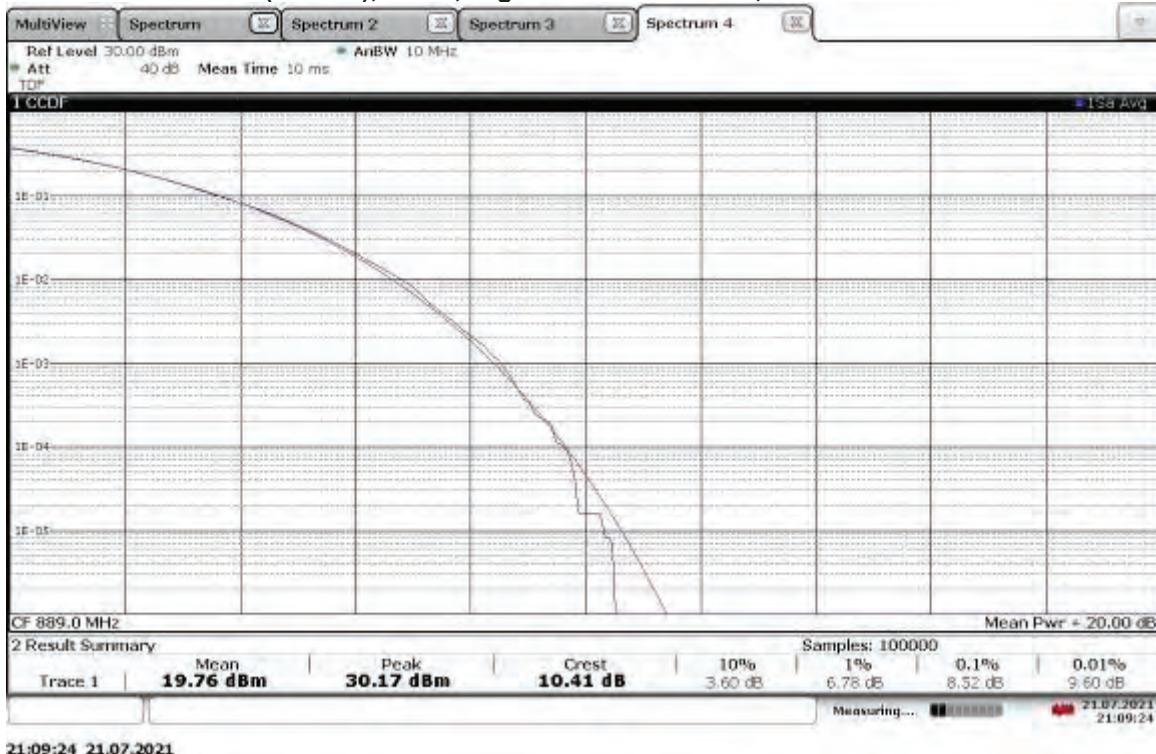


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Low Channel 876.5 MHz, PAPR = 10.82 dB

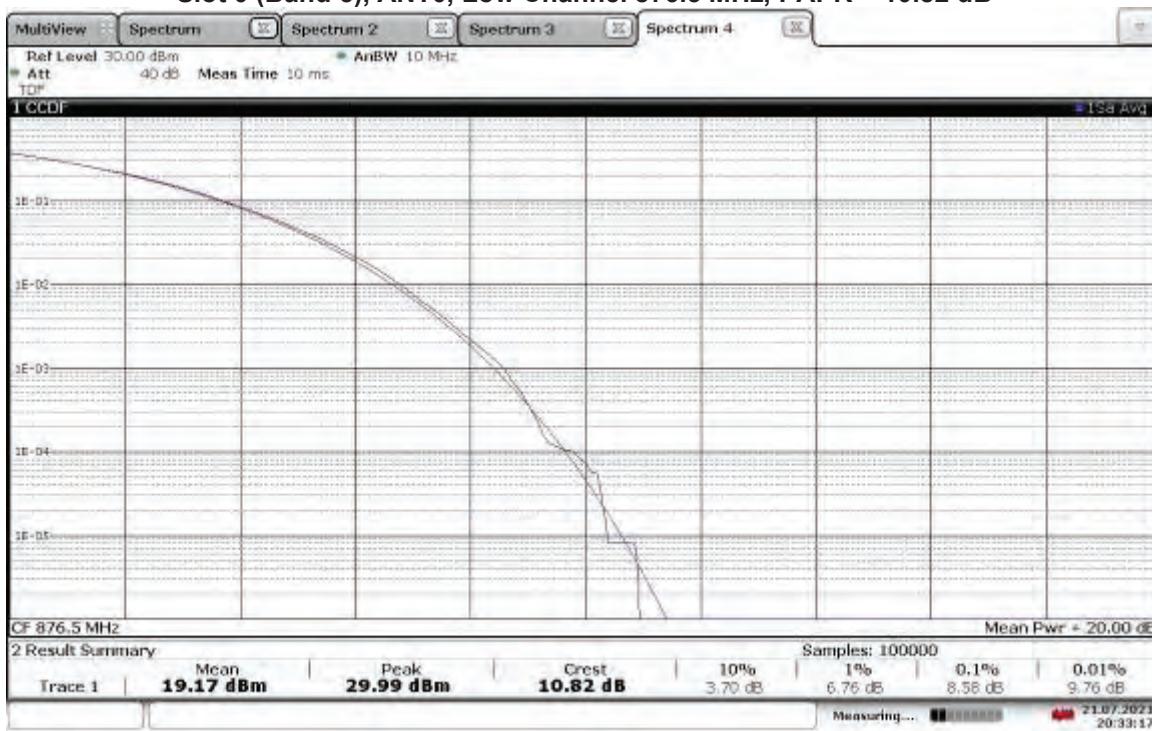


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Low Channel 876.5 MHz, PAPR = 10.74 dB

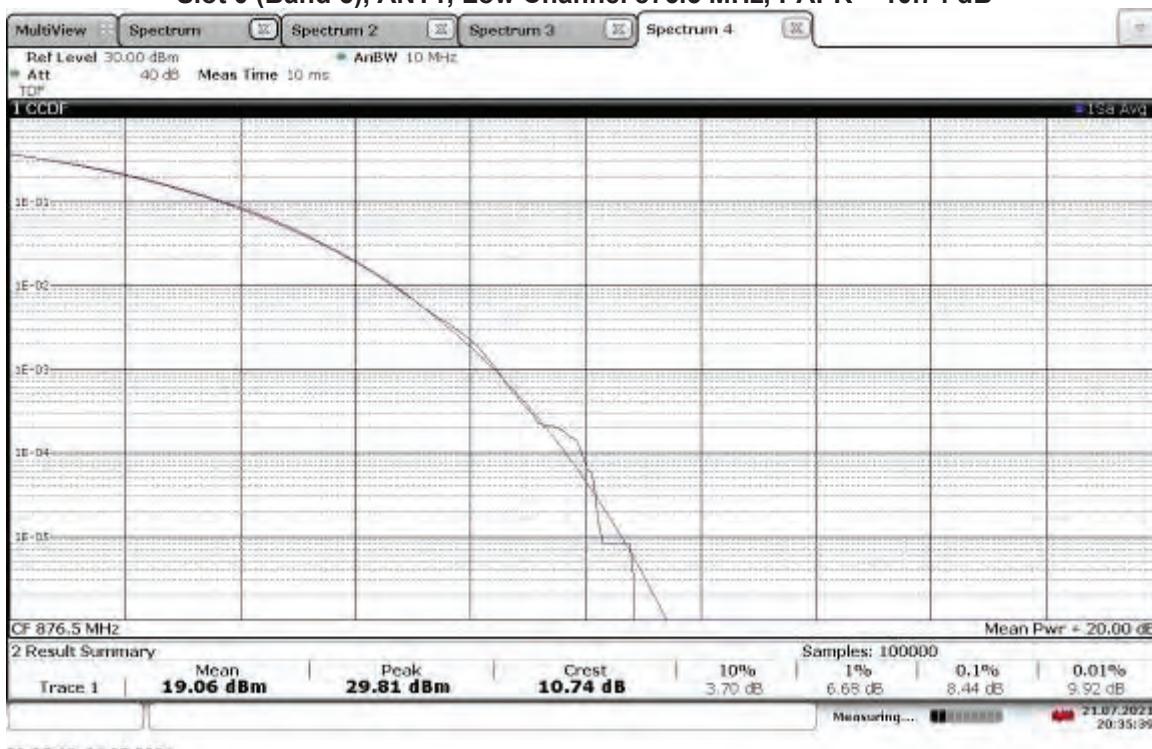


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, Mid Channel 881 MHz, PAPR = 10.53 dB

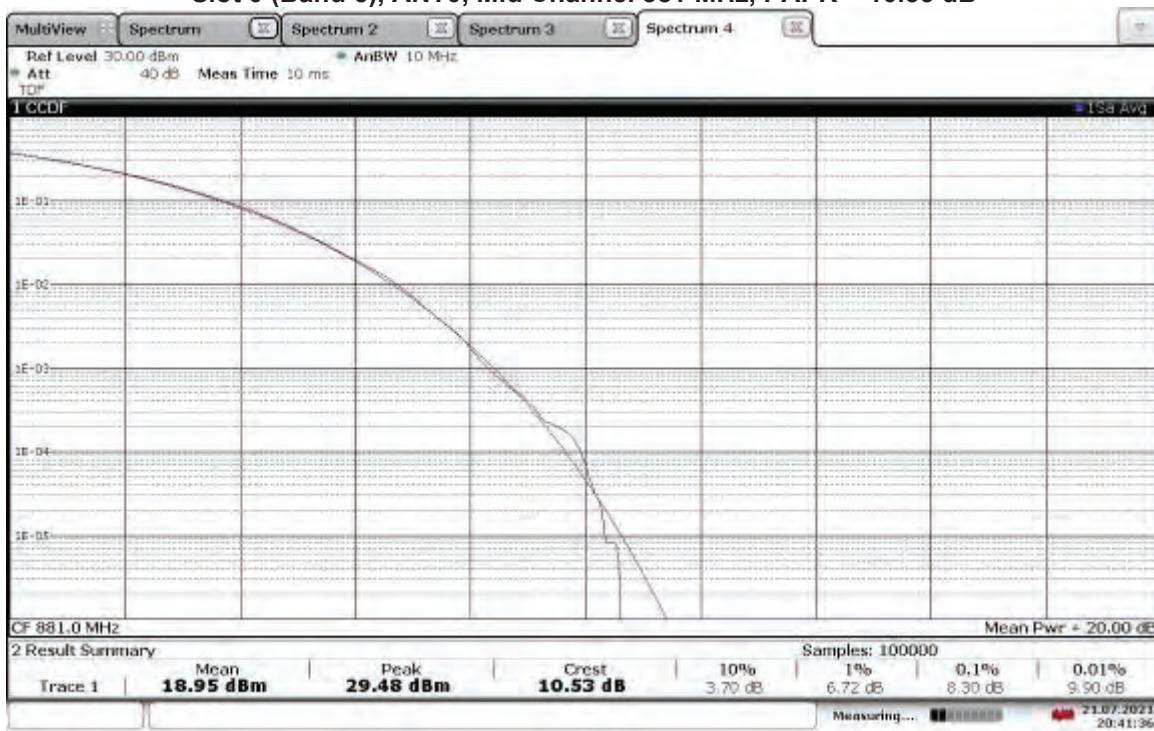

TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, Mid Channel 881 MHz, PAPR = 10.87 dB

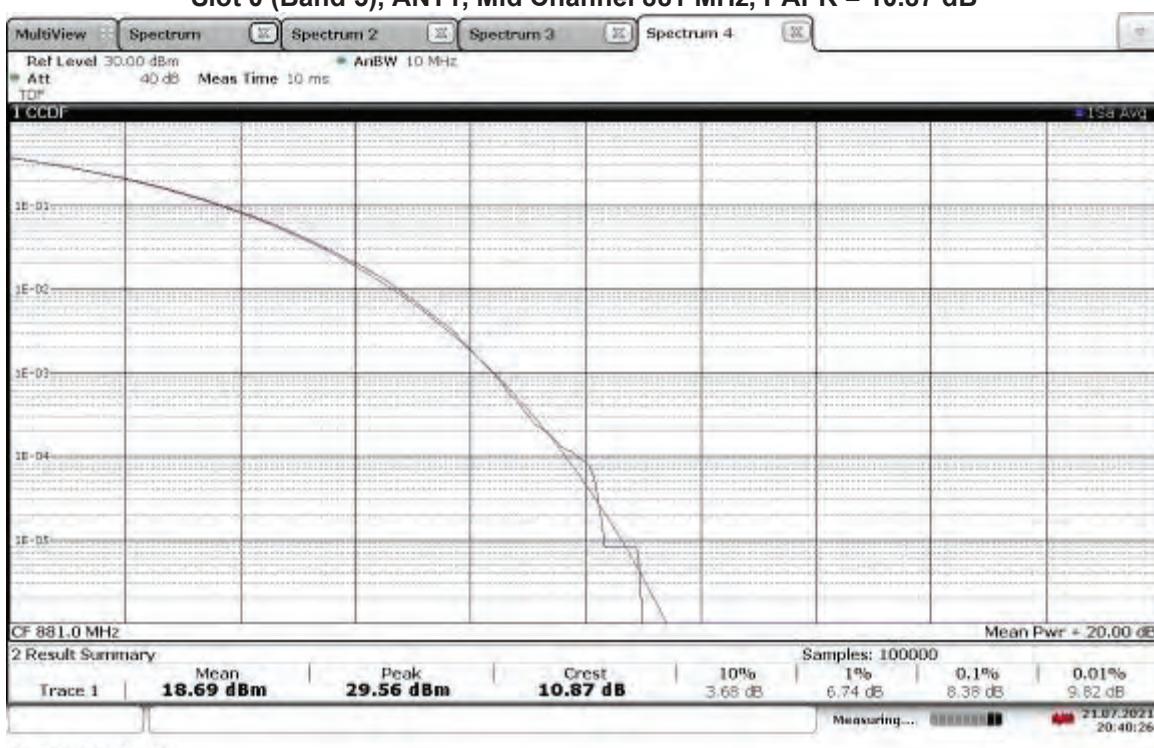

TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT0, High Channel 886.5 MHz, PAPR = 11.09 dB

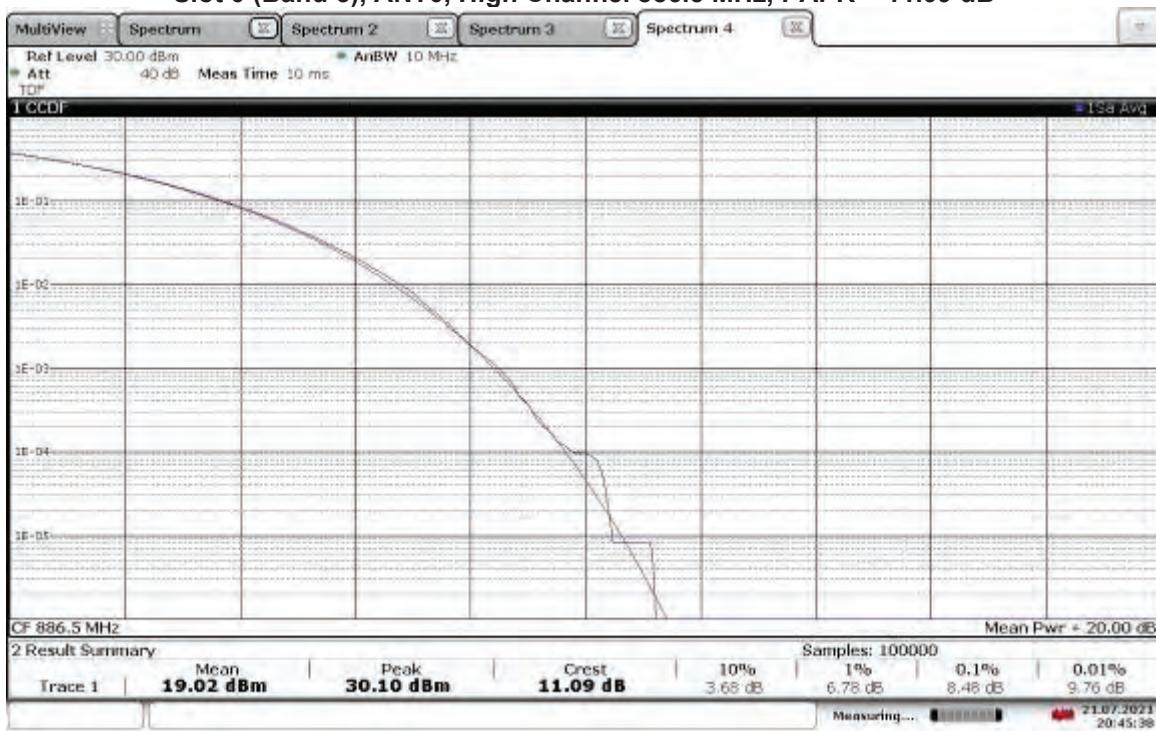

TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 5), ANT1, High Channel 886.5 MHz, PAPR = 11.16 dB

