



Appendix A. Test Result of AC Power Line Conducted Emission

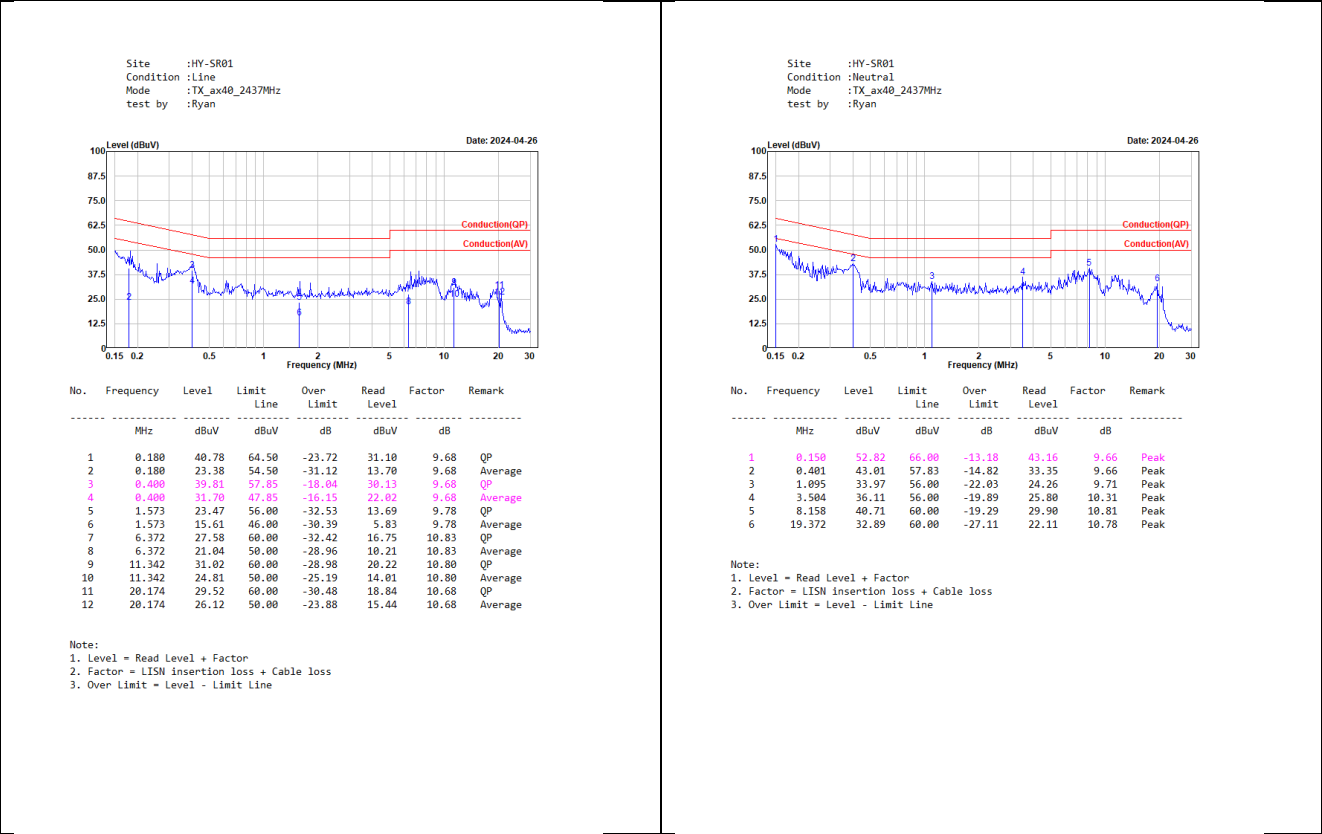


Appendix B. 6dB Bandwidth

Modulation	Chain	Frequency (MHz)	Measured Value (kHz)	Required Limit (kHz)	Result
802.11b	A	2412	8072	>500	Pass
	A	2437	8072	>500	Pass
	A	2462	8072	>500	Pass
802.11g	A	2412	8072	>500	Pass
	A	2437	8072	>500	Pass
	A	2462	8072	>500	Pass
802.11ac (20 MHz)	A	2412	17582	>500	Pass
	A	2437	17582	>500	Pass
	A	2462	17582	>500	Pass
	B	2412	17343	>500	Pass
	B	2437	17263	>500	Pass
	B	2462	17582	>500	Pass
802.11ac (40 MHz)	A	2422	36284	>500	Pass
	A	2437	36284	>500	Pass
	A	2452	35644	>500	Pass
	B	2422	36284	>500	Pass
	B	2437	36284	>500	Pass
	B	2452	35644	>500	Pass
802.11ax (20 MHz)	A	2412	18981	>500	Pass
	A	2437	18861	>500	Pass
	A	2462	19021	>500	Pass
	B	2412	18581	>500	Pass
	B	2437	18901	>500	Pass
	B	2462	18941	>500	Pass
802.11ax (40 MHz)	A	2422	37483	>500	Pass
	A	2437	38042	>500	Pass
	A	2452	38122	>500	Pass
	B	2422	37163	>500	Pass
	B	2437	37562	>500	Pass
	B	2452	36683	>500	Pass


802.11b / 2412 MHz / Chain A

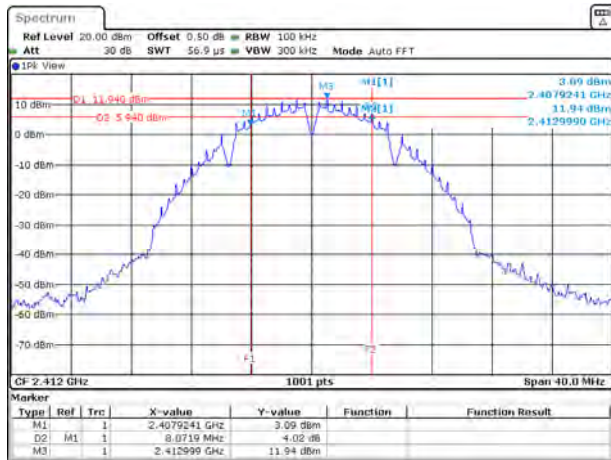


802.11g / 2412 MHz / Chain A

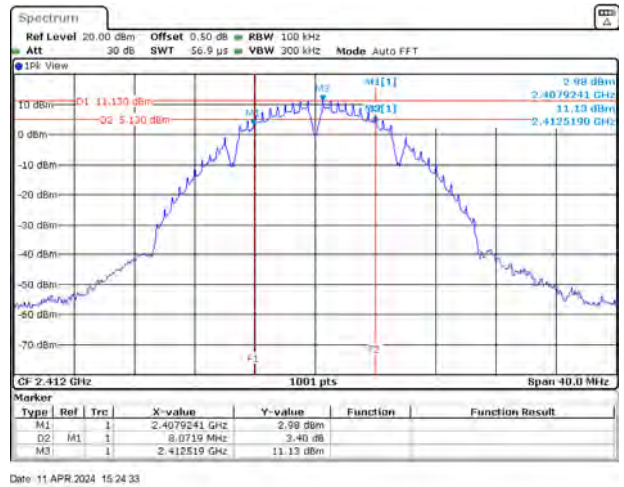


802.11ac (20MHz) / 2437 MHz / Chain B

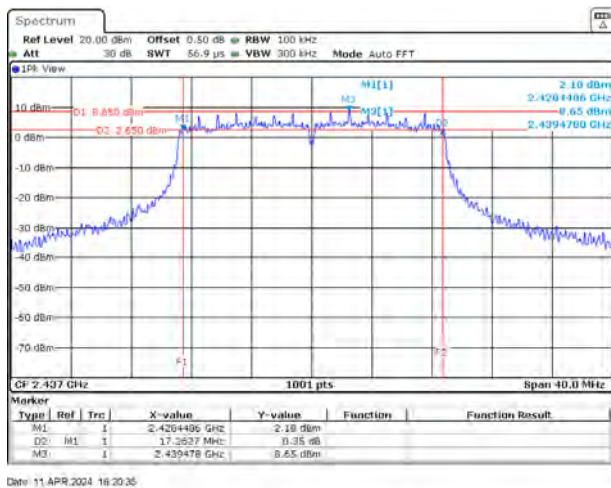


802.11ac (40MHz) / 2452 MHz / Chain B

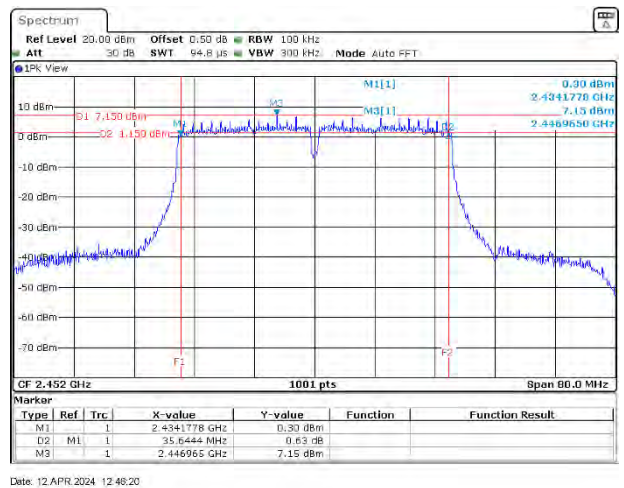

802.11ax (20MHz) / 2412 MHz / Chain B

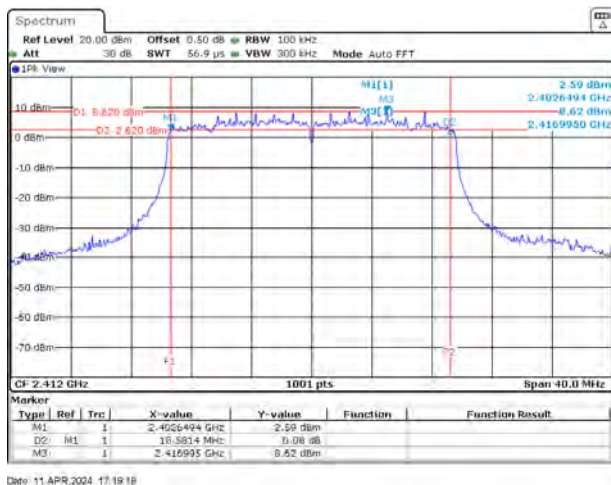

802.11ax (40MHz) / 2452 MHz / Chain B

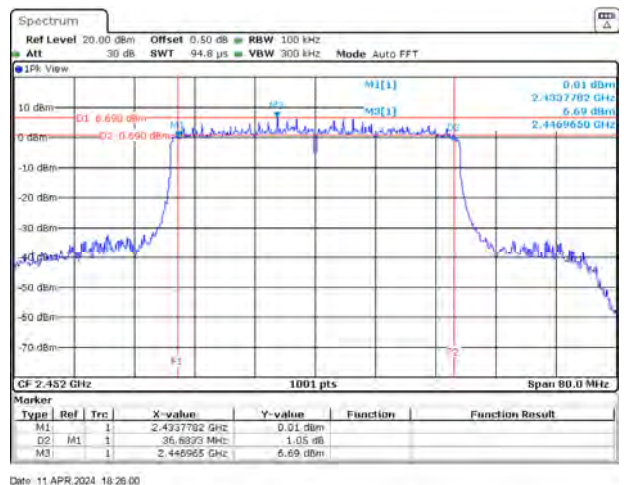

Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	2412	18.02	<30.00	Pass
	2437	21.44	<30.00	Pass
	2462	18.28	<30.00	Pass
802.11g	2412	20.38	<30.00	Pass
	2437	20.84	<30.00	Pass
	2462	20.56	<30.00	Pass

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11ac (20 MHz)	2412	19.96	20.18	23.08	<30.00	Pass
	2437	20.15	21.10	23.66	<30.00	Pass
	2462	19.30	20.16	22.76	<30.00	Pass
802.11ac (40 MHz)	2422	18.90	20.00	22.50	<30.00	Pass
	2437	20.18	20.95	23.59	<30.00	Pass
	2452	18.75	19.82	22.33	<30.00	Pass

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11ax (20 MHz)	2412	19.77	20.34	23.07	<30.00	Pass
	2437	20.12	20.46	23.30	<30.00	Pass
	2462	19.52	20.15	22.86	<30.00	Pass
802.11ax (40 MHz)	2422	18.95	20.02	22.53	<30.00	Pass
	2437	20.20	20.55	23.39	<30.00	Pass
	2452	18.60	19.62	22.15	<30.00	Pass

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	Peak Output power (dBm)	Limit (dBm)	Result
802.11b	2412	20.55	<30.00	Pass
	2437	23.87	<30.00	Pass
	2462	20.82	<30.00	Pass
802.11g	2412	25.02	<30.00	Pass
	2437	25.70	<30.00	Pass
	2462	25.38	<30.00	Pass

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Peak Output power (dBm)	Limit (dBm)	Result
802.11ac (20 MHz)	2412	26.60	26.68	29.65	<30.00	Pass
	2437	26.10	27.54	29.89	<30.00	Pass
	2462	26.32	27.02	29.69	<30.00	Pass
802.11ac (40 MHz)	2422	25.52	26.48	29.04	<30.00	Pass
	2437	26.26	27.30	29.82	<30.00	Pass
	2452	25.58	26.65	29.16	<30.00	Pass

Note: Peak Output Power (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Peak Output power (dBm)	Limit (dBm)	Result
802.11ax (20 MHz)	2412	26.68	26.88	29.79	<30.00	Pass
	2437	26.72	27.02	29.88	<30.00	Pass
	2462	26.65	26.95	29.81	<30.00	Pass
802.11ax (40 MHz)	2422	25.68	26.95	29.37	<30.00	Pass
	2437	26.75	27.08	29.93	<30.00	Pass
	2452	25.82	27.38	29.68	<30.00	Pass

Note: Peak Output Power (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)})$.


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Chain	Measured Value (dBm)	Limit (dBm)	Result
802.11b	2412	A	-1.790	≤ 8.0	Pass
	2437	A	1.040	≤ 8.0	Pass
	2462	A	-3.260	≤ 8.0	Pass
802.11g	2412	A	-3.270	≤ 8.0	Pass
	2437	A	-2.930	≤ 8.0	Pass
	2462	A	-3.140	≤ 8.0	Pass


Modulation	Frequency (MHz)	Chain	Measured Value (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11ac (20 MHz)	2412	A	-4.510	-1.757	≤ 6.1	Pass
		B	-5.040			
	2437	A	-3.000	-0.852	≤ 6.1	Pass
		B	-4.940			
	2462	A	-5.700	-1.576	≤ 6.1	Pass
		B	-3.700			
802.11ac (40 MHz)	2422	A	-7.550	-4.022	≤ 6.1	Pass
		B	-6.570			
	2437	A	-7.590	-3.995	≤ 6.1	Pass
		B	-6.490			
	2452	A	-7.060	-3.745	≤ 6.1	Pass
		B	-6.470			
802.11ax (20 MHz)	2412	A	-6.170	-3.224	≤ 6.1	Pass
		B	-6.300			
	2437	A	-6.470	-3.096	≤ 6.1	Pass
		B	-5.770			
	2462	A	-7.440	-3.788	≤ 6.1	Pass
		B	-6.240			
802.11ax (40 MHz)	2422	A	-8.180	-5.053	≤ 6.1	Pass
		B	-7.950			
	2437	A	-8.810	-4.932	≤ 6.1	Pass
		B	-7.220			
	2452	A	-8.540	-4.967	≤ 6.1	Pass
		B	-7.480			

Note: Total PSD = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.


802.11b / 2437 MHz / Chain A

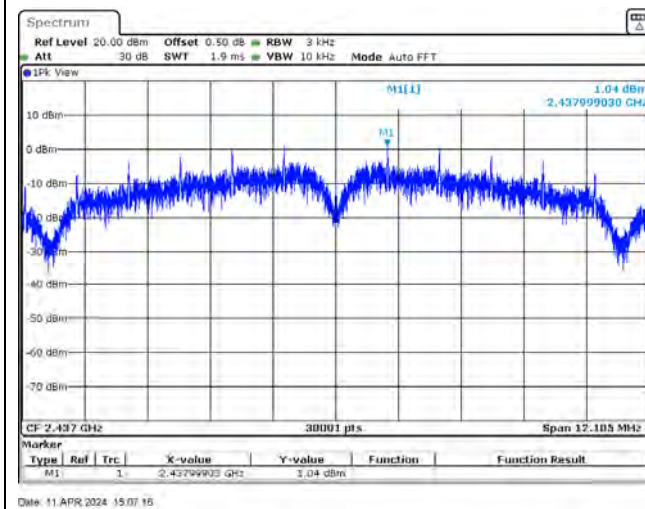


802.11b / 2437 MHz / Chain A

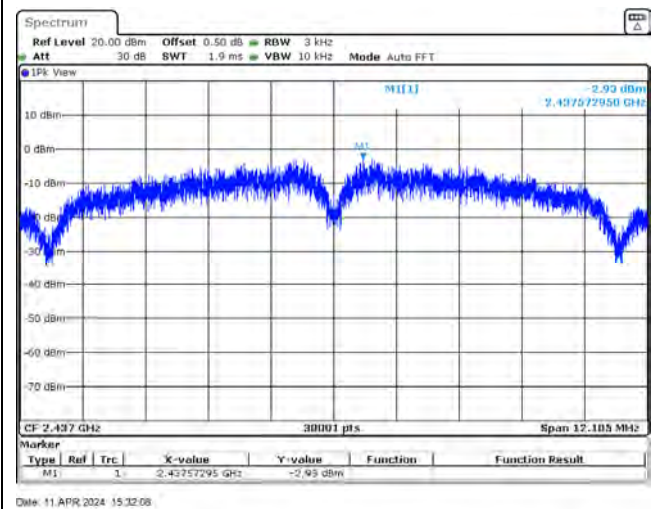


802.11ac (20 MHz) / 2437 MHz / Chain A

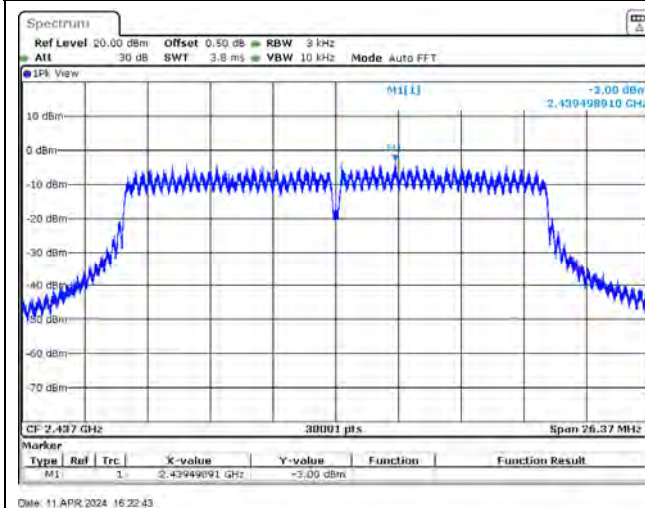


802.11ac (40 MHz) / 2452 MHz / Chain B

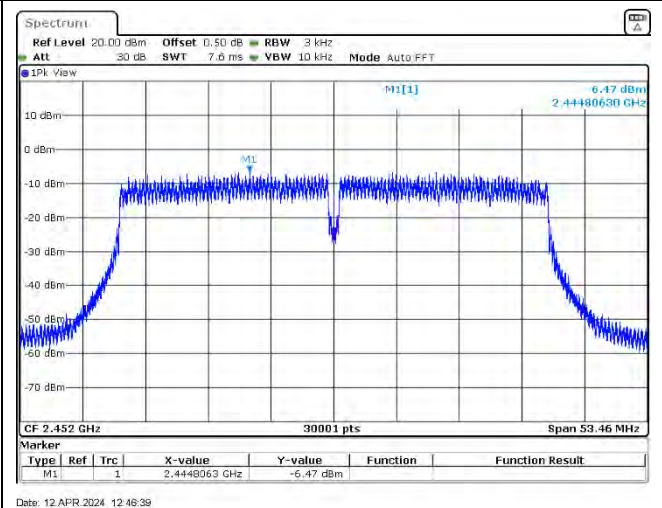


802.11ax (20 MHz) / 2437 MHz / Chain B

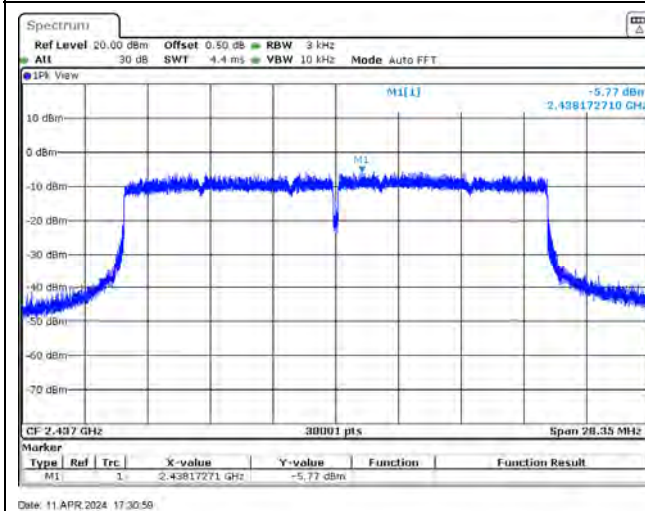


802.11ax (40 MHz) / 2437 MHz / Chain B

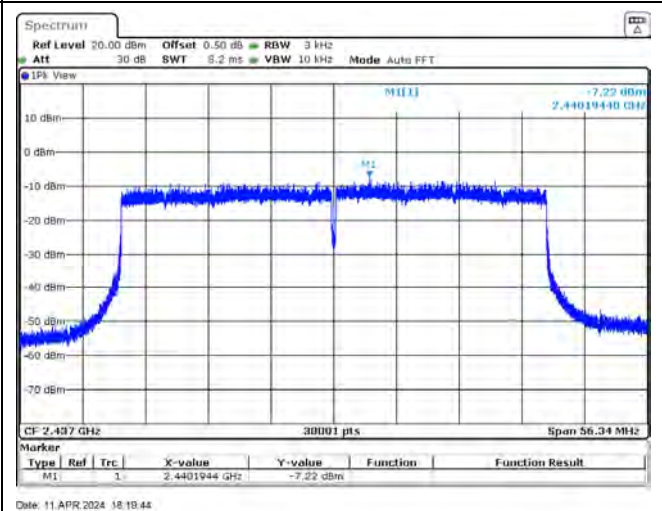

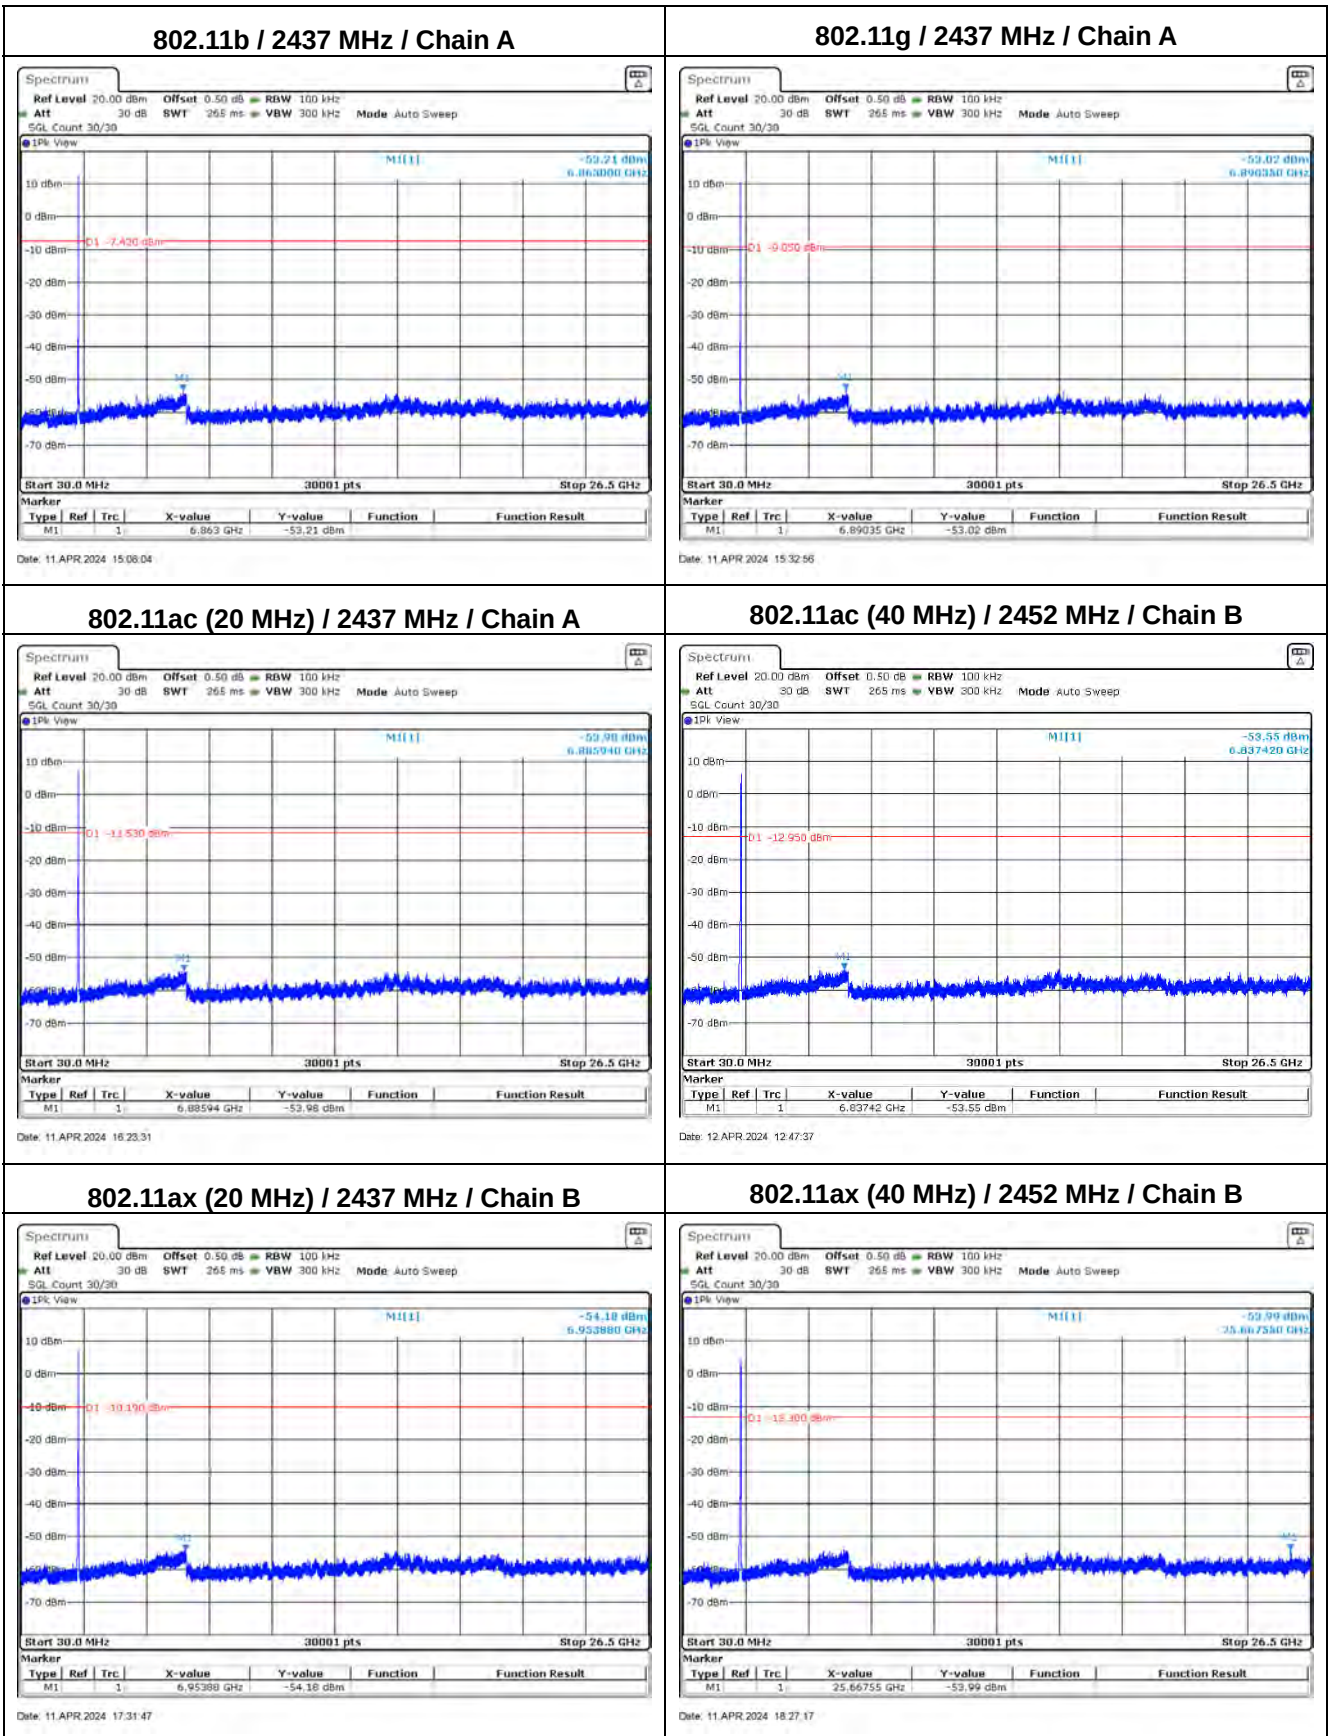
Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
802.11b	> 20	PASS
802.11g	> 20	PASS
802.11ac (20MHz)	> 20	PASS
802.11ac (40MHz)	> 20	PASS
802.11ax (20MHz)	> 20	PASS
802.11ax (40MHz)	> 20	PASS


802.11b / 2412 MHz

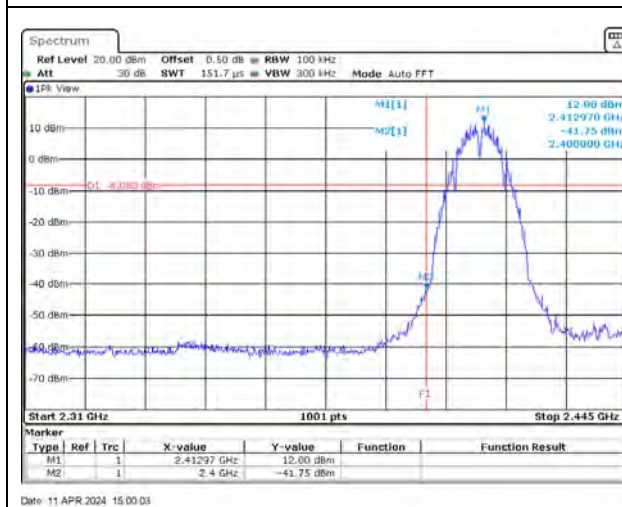


802.11b / 2462 MHz

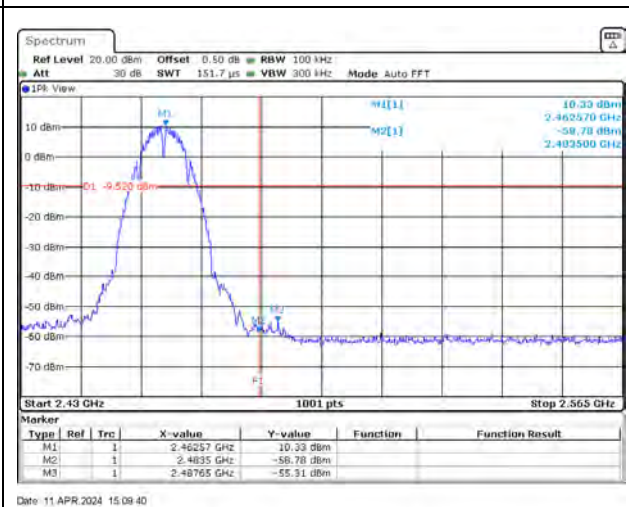


802.11g / 2412 MHz

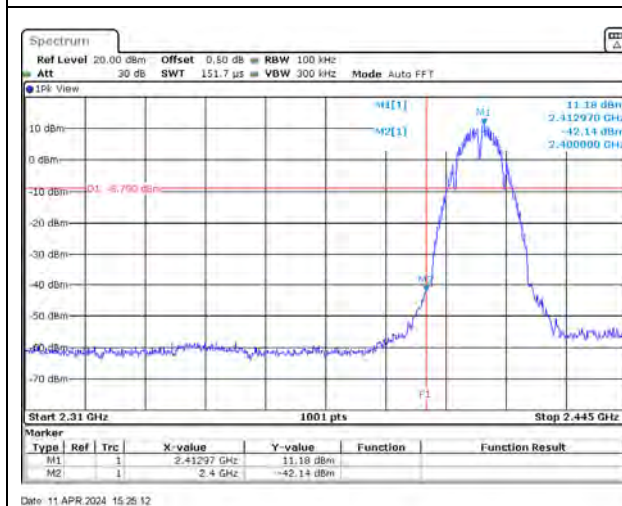

802.11g / 2462 MHz

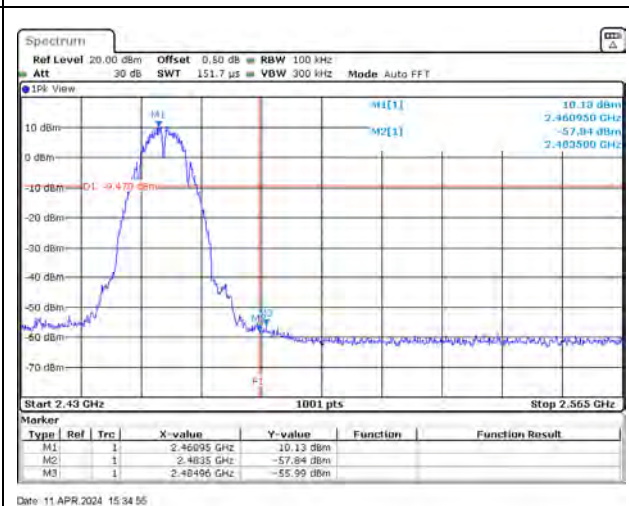


802.11ac (20 MHz) / 2412 MHz / Chain A

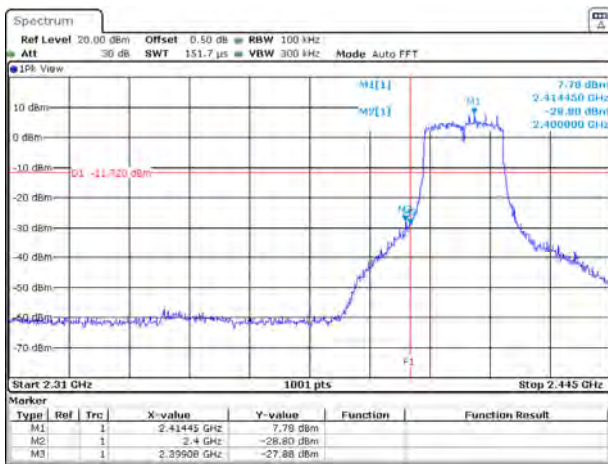


Date: 11 APR 2024 15:53:28

802.11ac (20 MHz) / 2412 MHz / Chain B

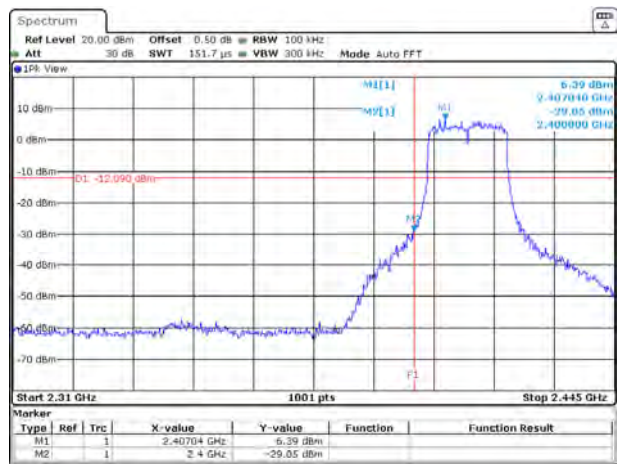


Date: 11 APR 2024 16:01:14

802.11ac (20 MHz) / 2462 MHz / Chain A

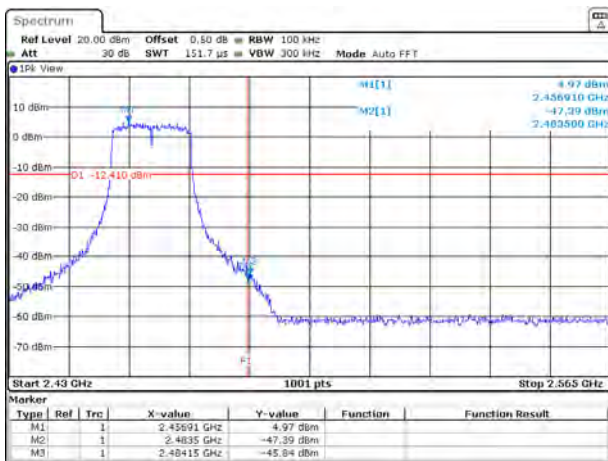


Date: 11 APR 2024 16:28:17

802.11ac (20 MHz) / 2462 MHz / Chain B

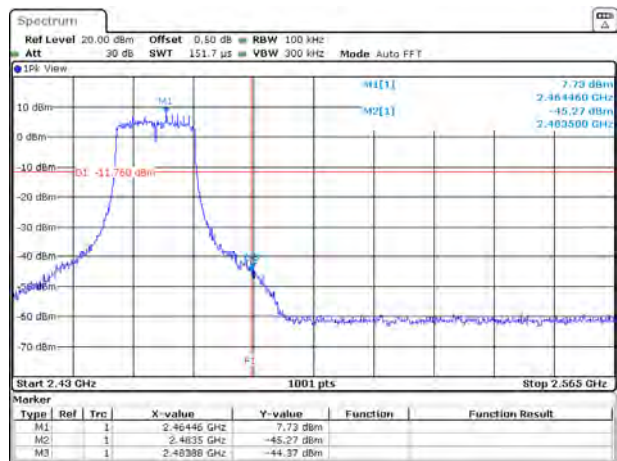


Date: 11 APR 2024 16:27:28

802.11ac (40 MHz) / 2422 MHz / Chain A

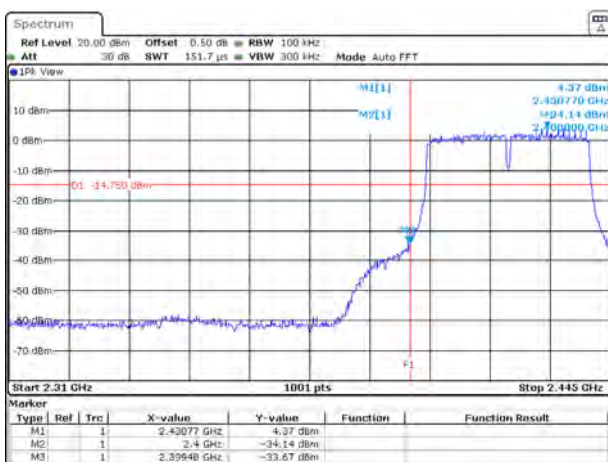


Date: 11 APR 2024 16:57:40

802.11ac (40 MHz) / 2422 MHz / Chain B

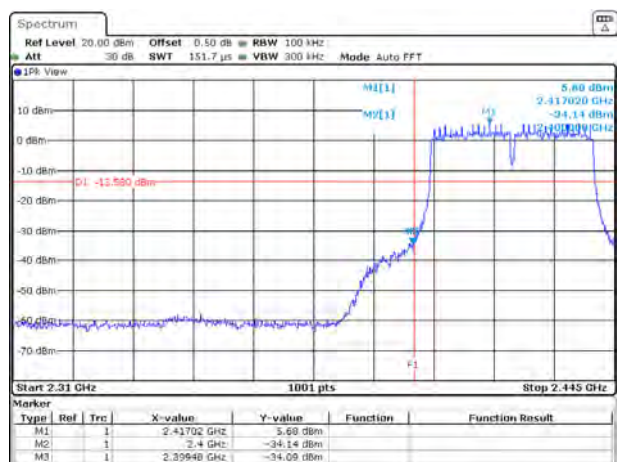


Date: 11 APR 2024 17:00:17

802.11ac (40 MHz) / 2452 MHz / Chain A

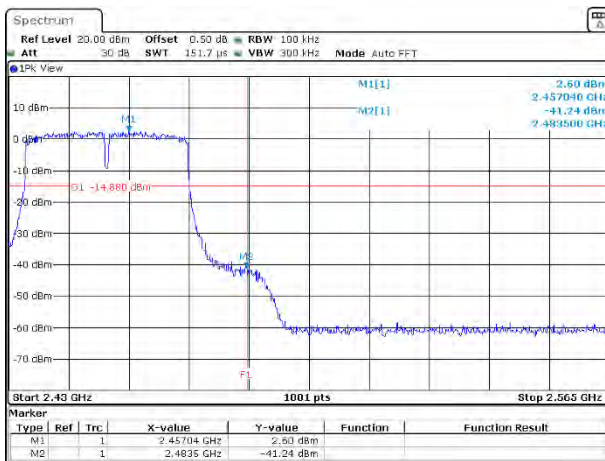


Date: 12 APR 2024 12:52:01

802.11ac (40 MHz) / 2452 MHz / Chain B

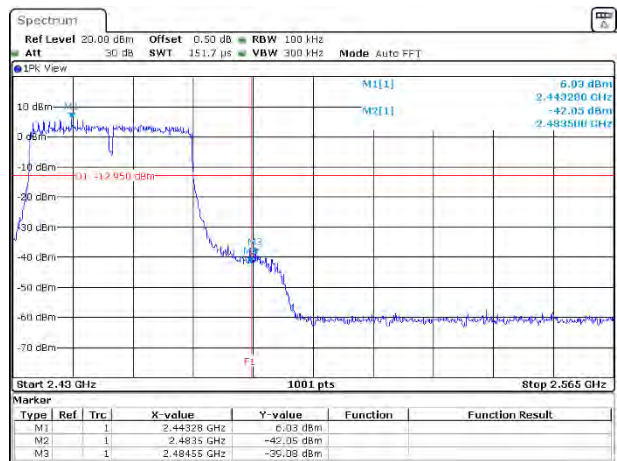


Date: 12 APR 2024 12:47:00

802.11ax (20 MHz) / 2412 MHz / Chain A

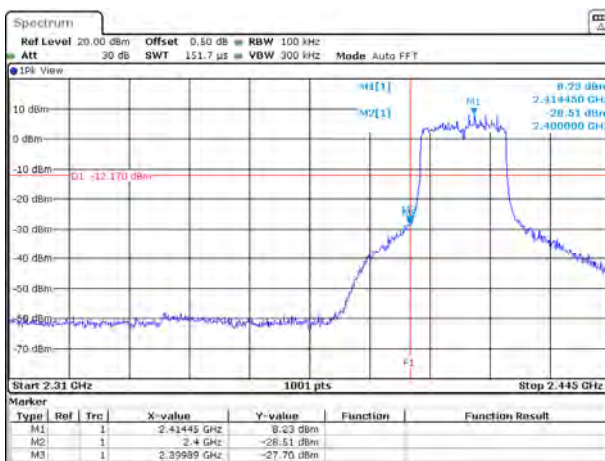


Date: 11 APR 2024 17:27:07

802.11ax (20 MHz) / 2412 MHz / Chain B

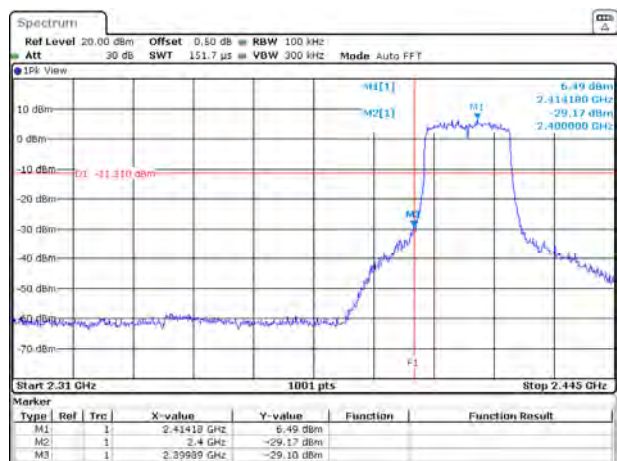


Date: 11 APR 2024 17:19:58

802.11ax (20 MHz) / 2462 MHz / Chain A

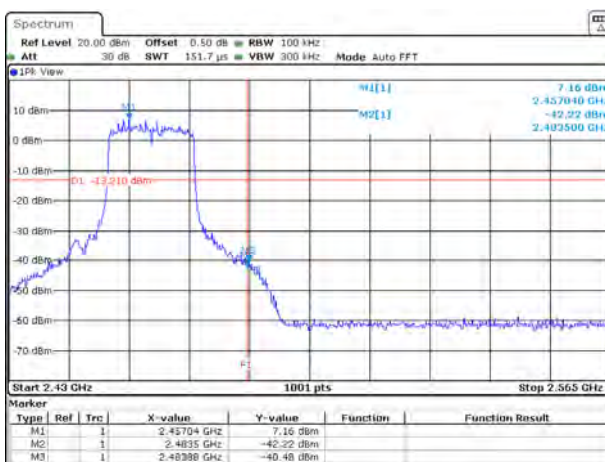


Date: 11 APR 2024 17:58:00

802.11ax (20 MHz) / 2462 MHz / Chain B

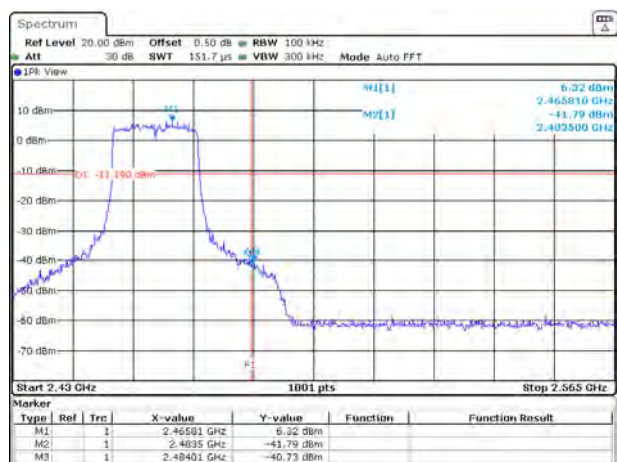


Date: 11 APR 2024 17:56:11

802.11ax (40 MHz) / 2422 MHz / Chain A

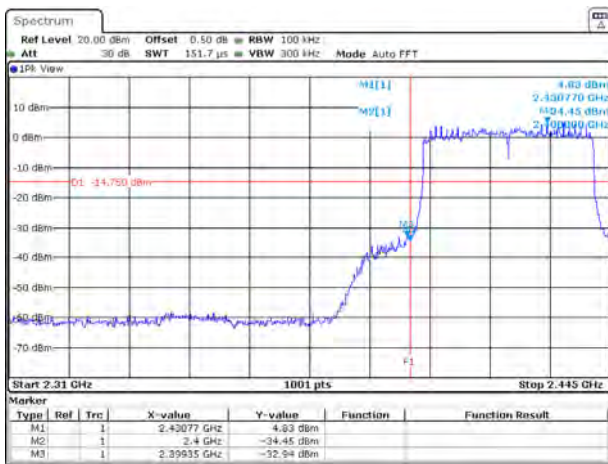


Date: 11 APR 2024 18:08:36

802.11ax (40 MHz) / 2422 MHz / Chain B

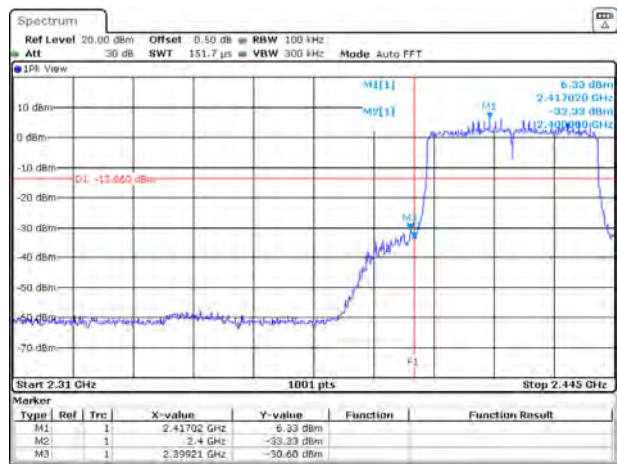


Date: 11 APR 2024 18:08:34

802.11ax (40 MHz) / 2452 MHz / Chain A

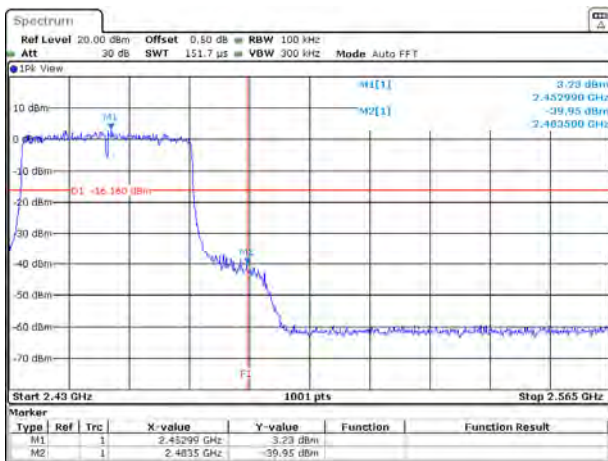

Date: 11 APR 2024 18:24:42


802.11ax (40 MHz) / 2452 MHz / Chain B

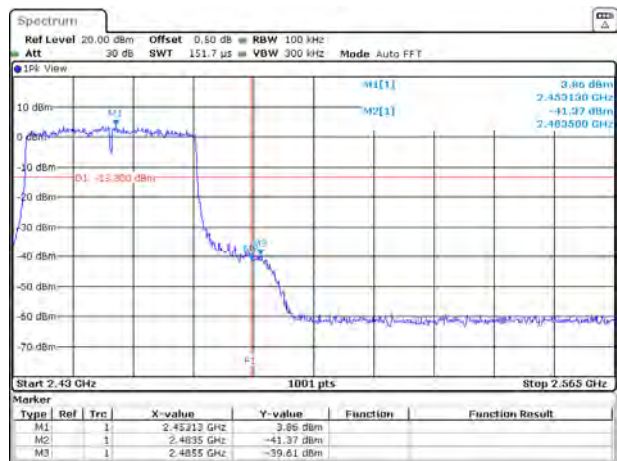

Date: 11 APR 2024 18:26:38

Appendix F. Test Result of Radiated Emission

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2412MHz
Test BY :Peter

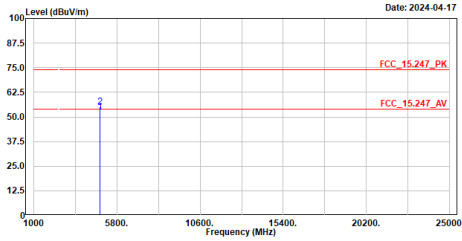


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	52.51	54.00	-1.49	66.18	-13.67	Average
2	4824.000	55.14	74.00	-18.86	68.81	-13.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2412MHz
Test BY :Peter

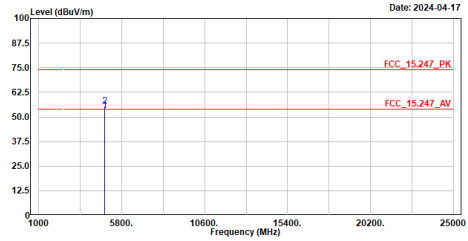


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	53.29	54.00	-0.71	66.96	-13.67	Average
2	4824.000	55.53	74.00	-18.47	69.20	-13.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz
Test BY :Peter

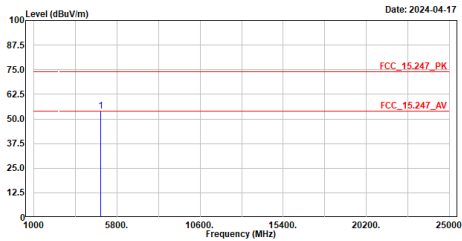


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	53.93	74.00	-20.07	67.41	-13.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz
Test BY :Peter

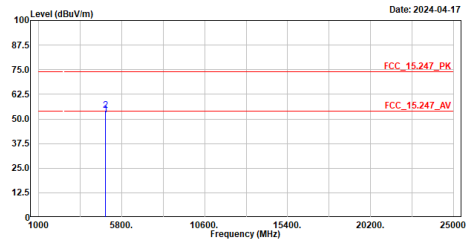


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	51.96	54.00	-2.04	65.44	-13.48	Average
2	4874.000	54.46	74.00	-19.54	67.94	-13.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
Test BY :Peter

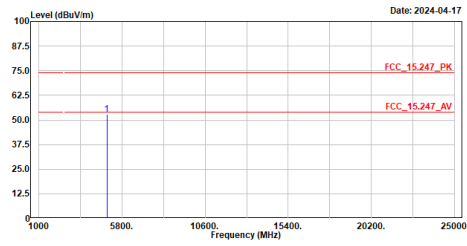

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	52.82	74.00	-21.18	66.11	-13.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
Test BY :Peter

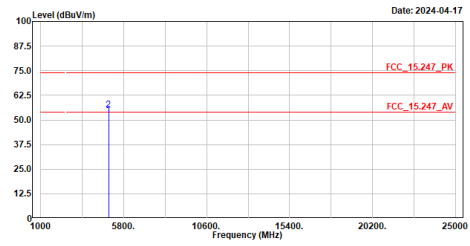

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	52.60	74.00	-21.40	65.89	-13.29	Average
2	4924.000	55.08	74.00	-18.92	68.37	-13.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
Test BY :Peter

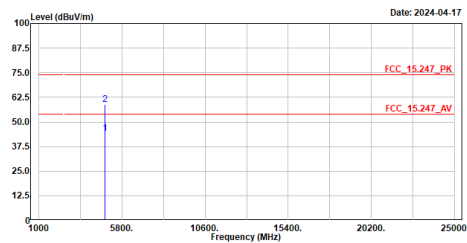

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	44.02	74.00	-29.98	57.69	-13.67	Average
2	4824.000	58.85	74.00	-15.15	72.52	-13.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2412MHz
Test BY :Peter

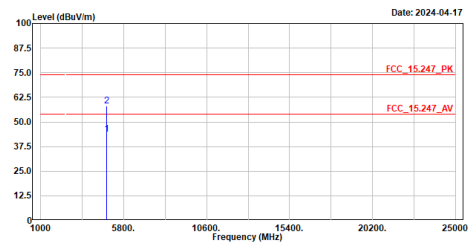

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	43.59	74.00	-30.41	57.26	-13.67	Average
2	4824.000	58.02	74.00	-15.98	71.69	-13.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
Test BY :Peter

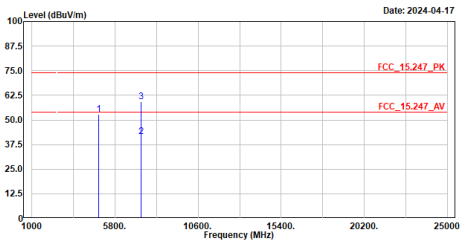

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	52.83	74.00	-21.17	66.31	-13.48	Peak
2	7311.000	41.60	54.00	-12.40	51.04	-9.44	Average
3	7311.000	59.37	74.00	-14.63	68.81	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
Test BY :Peter

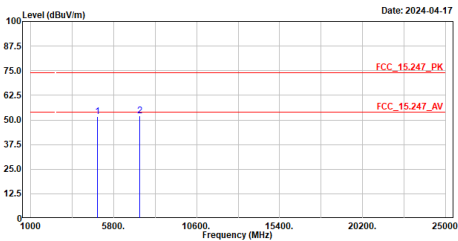

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	51.86	74.00	-22.14	65.34	-13.48	Peak
2	7311.000	52.21	74.00	-21.79	61.65	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
Test BY :Peter

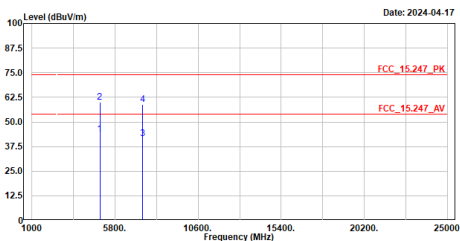

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	43.93	54.00	-10.07	57.22	-13.29	Average
2	4924.000	60.06	74.00	-13.94	73.35	-13.29	Peak
3	7386.000	41.59	54.00	-12.41	51.14	-9.55	Average
4	7386.000	59.05	74.00	-14.95	68.60	-9.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
Test BY :Peter

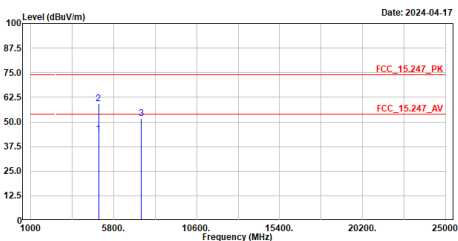

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	43.64	54.00	-10.36	56.93	-13.29	Average
2	4924.000	59.12	74.00	-14.88	72.41	-13.29	Peak
3	7386.000	51.65	74.00	-22.35	61.20	-9.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_2412MHz
Test BY :Cater

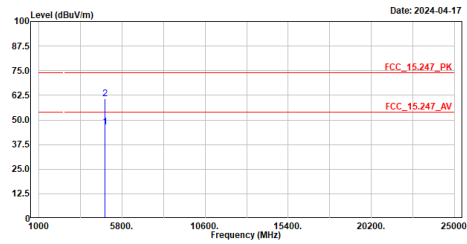


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	46.33	54.00	-7.67	60.00	-13.67	Average
2	4824.000	60.83	74.00	-13.17	74.50	-13.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_2412MHz
Test BY :Cater

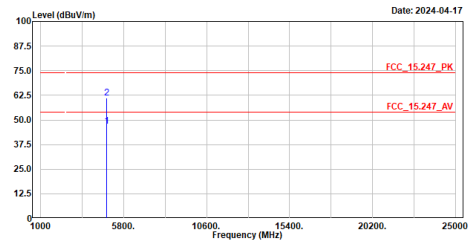


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	46.69	54.00	-7.31	60.36	-13.67	Average
2	4824.000	61.16	74.00	-12.84	74.83	-13.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_2437MHz
Test BY :Cater

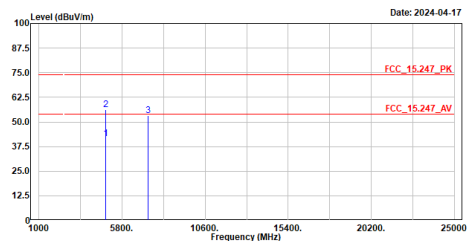


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	41.63	54.00	-12.37	55.11	-13.48	Average
2	4874.000	56.10	74.00	-17.90	69.58	-13.48	Peak
3	7311.000	53.16	74.00	-20.84	62.60	-9.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_2437MHz
Test BY :Cater

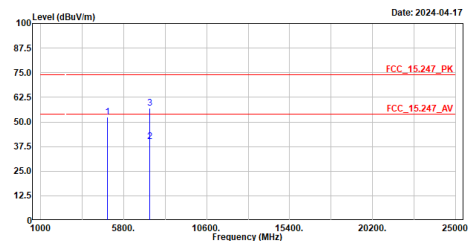


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	52.29	74.00	-21.71	65.77	-13.48	Peak
2	7311.000	40.04	54.00	-13.96	49.48	-9.44	Average
3	7311.000	57.11	74.00	-16.89	66.55	-9.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_2462MHz
Test BY :Cater

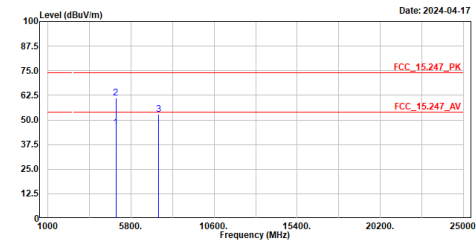

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	46.07	54.00	-7.93	59.36	-13.29	Average
2	4924.000	61.19	74.00	-12.81	74.48	-13.29	Peak
3	7386.000	52.65	74.00	-21.35	62.20	-9.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_2462MHz
Test BY :Cater

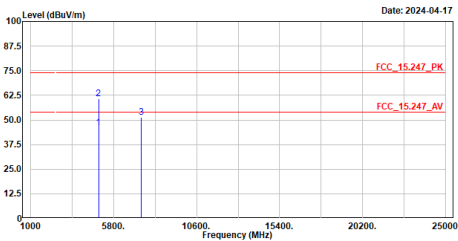

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	46.16	54.00	-7.84	59.45	-13.29	Average
2	4924.000	60.63	74.00	-13.37	73.92	-13.29	Peak
3	7386.000	51.20	74.00	-22.80	60.75	-9.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_2422MHz
Test BY :Cater

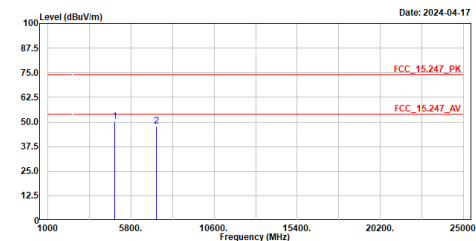

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4844.000	50.04	74.00	-23.96	63.61	-13.57	Peak
2	7266.000	48.10	74.00	-25.90	57.61	-9.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_2422MHz
Test BY :Cater

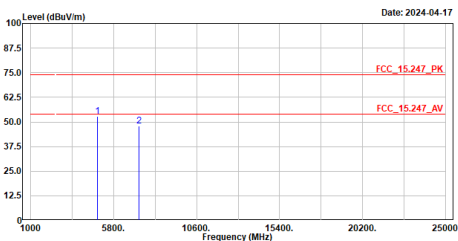

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4844.000	52.73	74.00	-21.27	66.30	-13.57	Peak
2	7266.000	47.96	74.00	-26.04	57.47	-9.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_2437MHz
Test BY :Cater

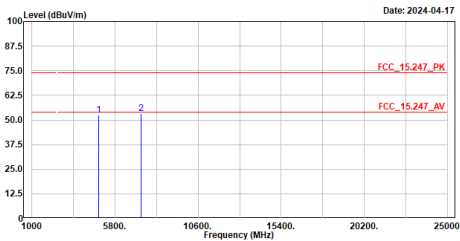

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	52.59	74.00	-21.41	66.87	-13.48	Peak
2	7311.000	53.17	74.00	-20.83	62.61	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_2437MHz
Test BY :Cater

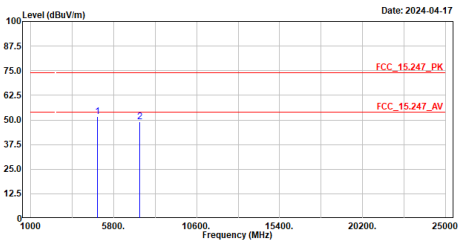

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	51.66	74.00	-22.34	65.14	-13.48	Peak
2	7311.000	48.92	74.00	-25.08	58.36	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_2452MHz
Test BY :Cater

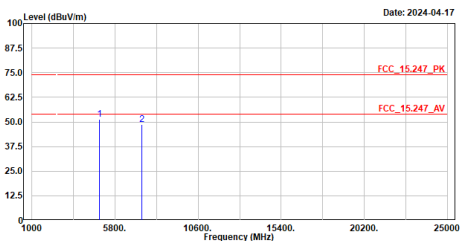

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4984.000	51.46	74.00	-22.54	64.84	-13.38	Peak
2	7356.000	48.58	74.00	-25.42	58.11	-9.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_2452MHz
Test BY :Cater

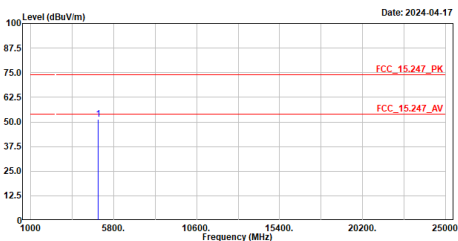

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4984.000	51.43	74.00	-22.57	64.81	-13.38	Peak
2	7356.000	48.58	74.00	-25.42	58.11	-9.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
Test BY :Cater

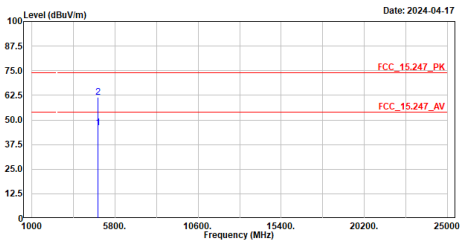

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	45.87	54.00	-8.13	59.54	-13.67	Average
2	4824.000	61.68	74.00	-12.32	75.35	-13.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
Test BY :Cater

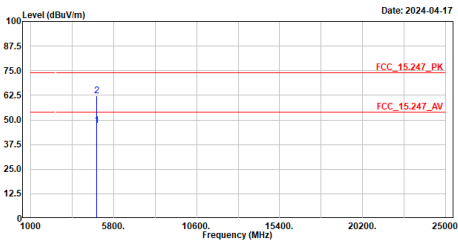

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	47.19	54.00	-6.81	60.86	-13.67	Average
2	4824.000	62.37	74.00	-11.63	76.04	-13.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2437MHz
Test BY :Cater

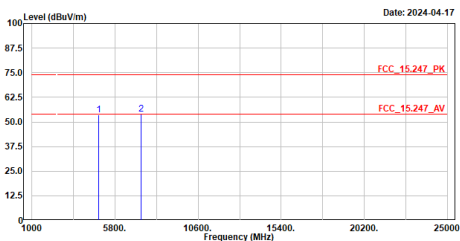

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	53.63	74.00	-20.37	67.11	-13.48	Peak
2	7311.000	53.88	74.00	-20.12	63.32	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2437MHz
Test BY :Cater

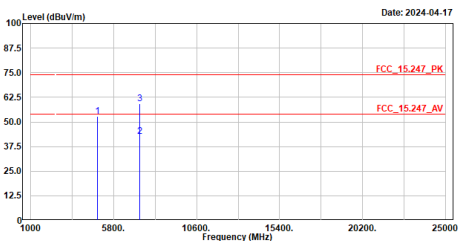

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	52.78	74.00	-21.22	66.26	-13.48	Peak
2	7311.000	42.46	54.00	-11.54	51.90	-9.44	Average
3	7311.000	59.36	74.00	-14.64	68.80	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
Test BY :Cater

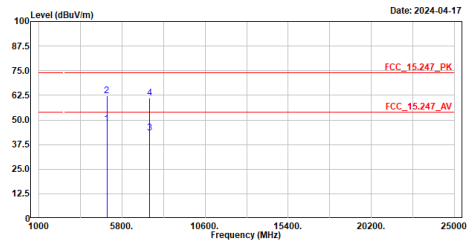


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4924.000	48.08	54.00	-5.92	61.37	-13.29	Average
2	4924.000	62.08	74.00	-11.92	75.37	-13.29	Peak
3	7386.000	43.49	54.00	-10.51	53.04	-9.55	Average
4	7386.000	61.01	74.00	-12.99	70.56	-9.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
Test BY :Cater

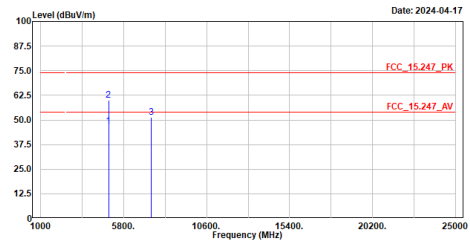


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4924.000	46.88	54.00	-7.12	60.17	-13.29	Average
2	4924.000	60.11	74.00	-13.89	73.40	-13.29	Peak
3	7386.000	51.24	74.00	-22.76	60.79	-9.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
Test BY :Cater

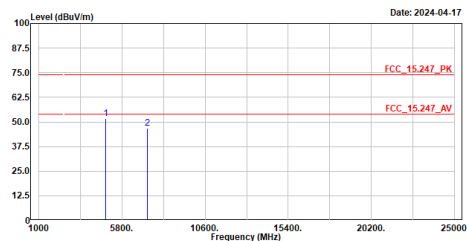


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	51.76	74.00	-22.24	65.33	-13.57	Peak
2	7266.000	46.82	74.00	-27.18	56.33	-9.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
Test BY :Cater

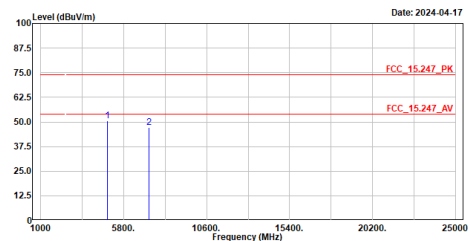


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	50.59	74.00	-23.41	64.16	-13.57	Peak
2	7266.000	47.22	74.00	-26.78	56.73	-9.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
Test BY :Cater

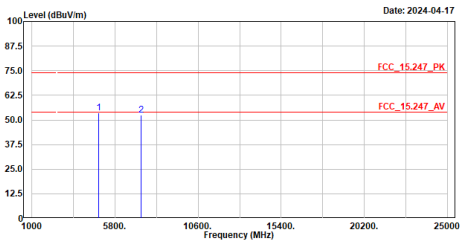

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	53.49	74.00	-20.51	66.97	-13.48	Peak
2	7311.000	52.53	74.00	-21.47	61.97	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
Test BY :Cater

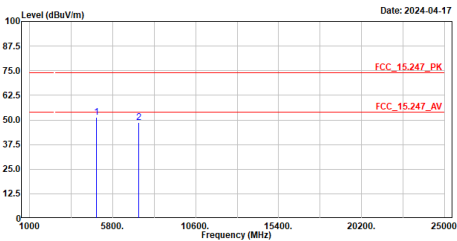

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	51.43	74.00	-22.57	64.91	-13.48	Peak
2	7311.000	48.76	74.00	-25.24	58.20	-9.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
Test BY :Cater

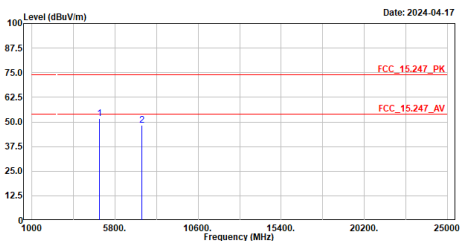

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4984.000	51.67	74.00	-22.33	65.05	-13.38	Peak
2	7356.000	48.46	74.00	-25.54	57.99	-9.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
Test BY :Cater

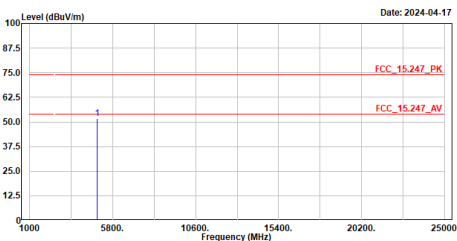

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4984.000	51.54	74.00	-22.46	64.92	-13.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
Test BY :Cater

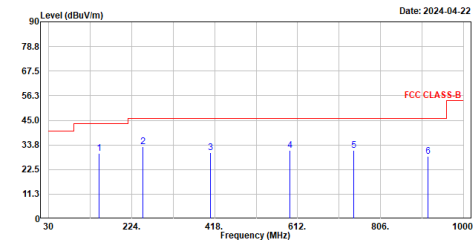

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	147.370	29.79	43.50	-13.71	53.65	-23.86	QP
2	250.190	32.95	46.00	-13.05	57.77	-24.82	QP
3	408.300	30.12	46.00	-15.88	50.10	-19.98	QP
4	594.540	31.29	46.00	-14.71	46.84	-15.55	QP
5	742.950	31.33	46.00	-14.67	44.51	-13.18	QP
6	916.580	28.53	46.00	-17.47	39.72	-11.19	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
Test BY :Cater

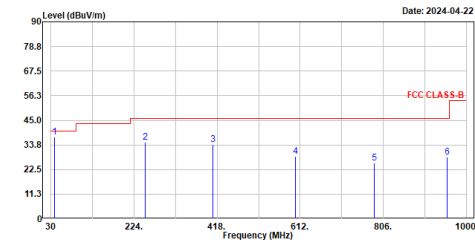

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	38.730	37.39	40.00	-2.61	61.63	-24.24	QP
2	250.190	34.82	46.00	-11.18	59.64	-24.82	QP
3	408.300	34.03	46.00	-11.97	54.01	-19.98	QP
4	600.360	28.44	46.00	-17.56	43.74	-15.30	QP
5	784.660	25.42	46.00	-20.58	38.03	-12.61	QP
6	955.380	28.07	46.00	-17.93	38.75	-10.68	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
Test BY :Peter

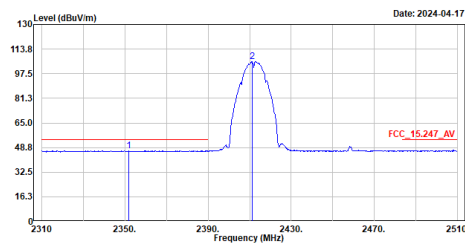


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2351.800	46.75	54.00	-7.25	16.29	30.46	Average
2	2411.200	105.67	-----	-----	75.13	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
Test BY :Peter

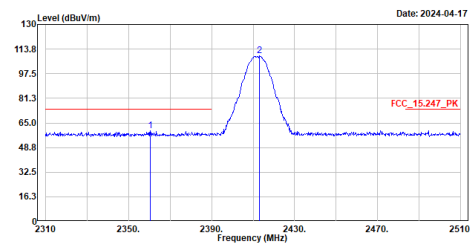


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2368.400	59.61	74.00	-14.39	29.14	30.47	Peak
2	2413.200	109.18	-----	-----	78.64	30.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
Test BY :Peter

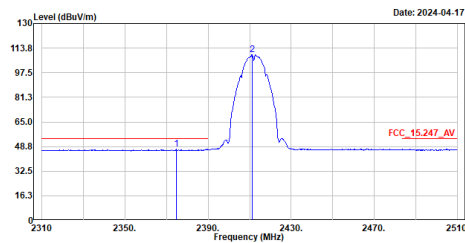


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2374.600	47.03	54.00	-6.97	16.54	30.49	Average
2	2411.200	109.33	-----	-----	78.79	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
Test BY :Peter

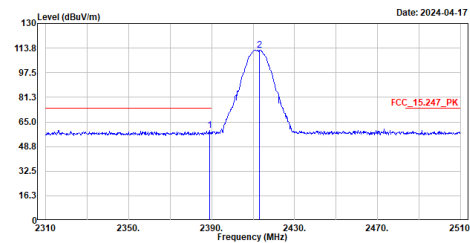


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.000	59.56	74.00	-14.44	28.96	30.60	Peak
2	2413.200	112.58	-----	-----	82.04	30.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Peter

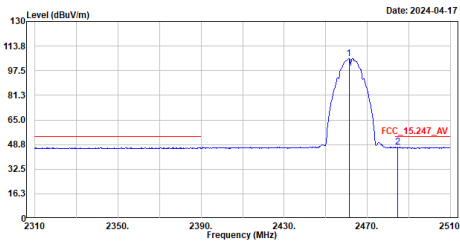

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.200	105.61	-----	-----	75.20	30.41	Average
2	2484.800	47.02	54.00	-6.98	16.57	30.45	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Peter

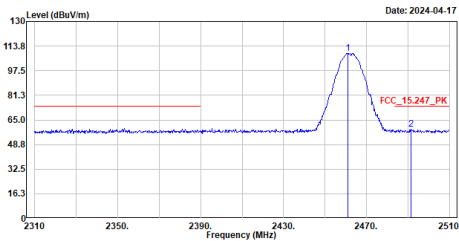

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	109.02	-----	-----	78.61	30.41	Peak
2	2491.400	58.76	74.00	-15.24	28.30	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Peter

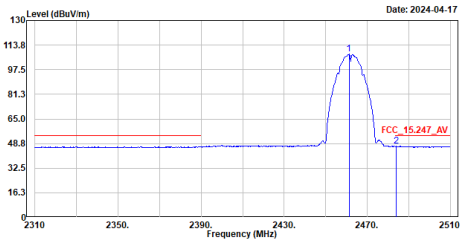

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.200	107.76	-----	-----	77.35	30.41	Average
2	2483.800	47.07	54.00	-6.93	16.63	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Peter

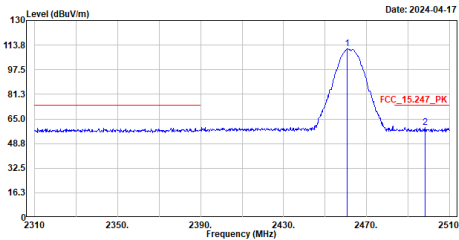

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.800	111.17	-----	-----	80.76	30.41	Peak
2	2498.400	59.30	74.00	-14.70	28.63	30.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Peter

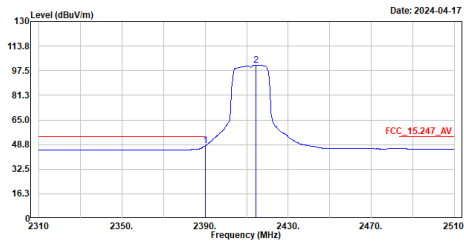

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.90	54.00	-6.10	17.29	30.61	Average
2	2414.600	101.18	-----	-----	70.64	30.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Peter

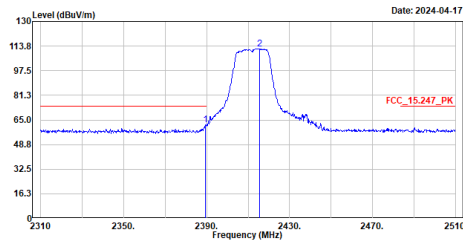

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	62.00	74.00	-12.00	31.40	30.60	Peak
2	2415.600	112.00	-----	-----	81.46	30.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Peter

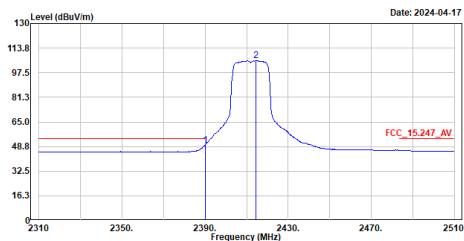

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	49.65	54.00	-4.35	19.04	30.61	Average
2	2414.600	105.39	-----	-----	74.85	30.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Peter

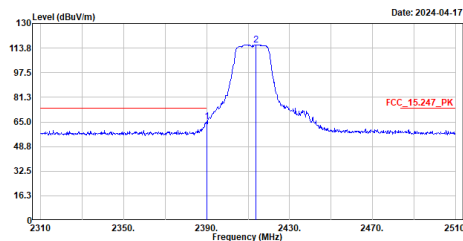

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	65.20	74.00	-8.80	34.59	30.61	Peak
2	2413.800	115.99	-----	-----	85.45	30.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Peter

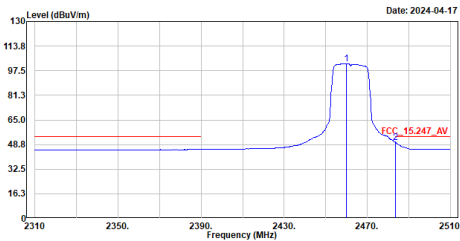

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.800	102.05	-----	-----	71.65	30.40	Average
2	2483.600	50.01	54.00	-3.99	19.57	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Peter

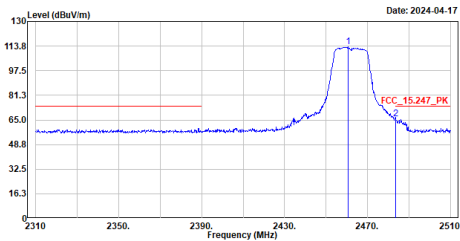

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.600	113.46	-----	-----	83.05	30.41	Peak
2	2483.600	65.52	74.00	-8.48	35.08	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Peter

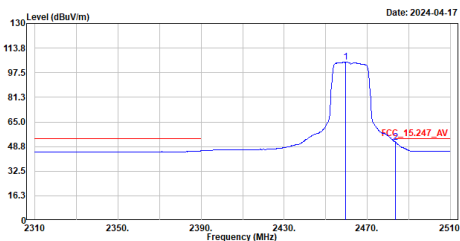

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.600	104.29	-----	-----	73.89	30.40	Average
2	2483.600	51.71	54.00	-2.29	21.27	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Peter

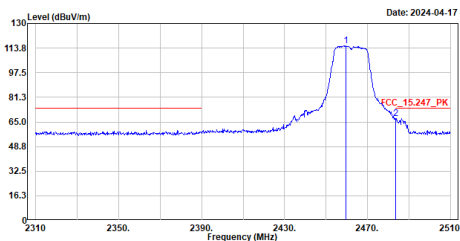

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.600	115.09	-----	-----	84.69	30.40	Peak
2	2483.600	67.41	74.00	-6.59	36.97	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Peter

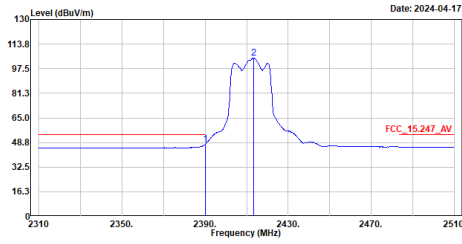


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	47.45	54.00	-6.55	16.84	30.61	Average
2	2413.400	104.50	-----	-----	73.96	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Peter

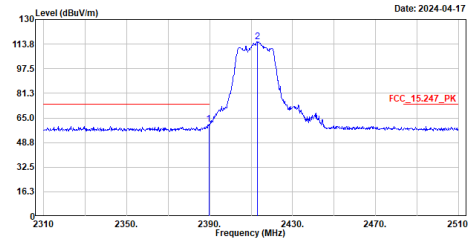


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	60.80	74.00	-13.20	30.19	30.61	Peak
2	2413.200	115.40	-----	-----	84.86	30.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Peter

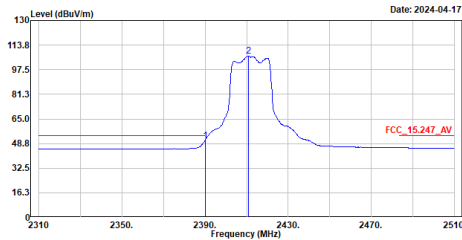


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	50.71	54.00	-3.29	20.10	30.61	Average
2	2411.000	106.58	-----	-----	76.04	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Peter

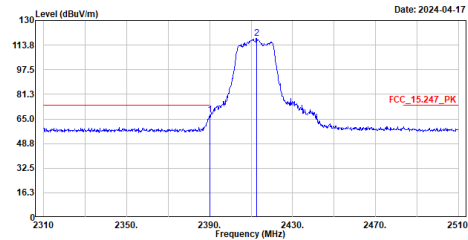


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	67.55	74.00	-6.45	36.94	30.61	Peak
2	2412.600	118.01	-----	-----	87.47	30.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Peter

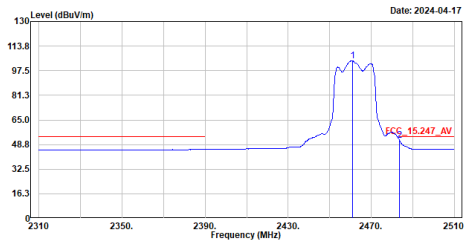

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	103.96	-----	-----	73.55	30.41	Average
2	2483.600	51.45	54.00	-2.55	21.01	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Peter

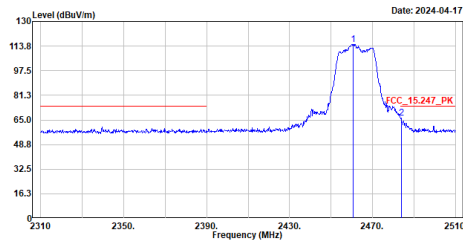

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.800	115.02	-----	-----	84.61	30.41	Peak
2	2483.800	66.20	74.00	-7.80	35.76	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Peter

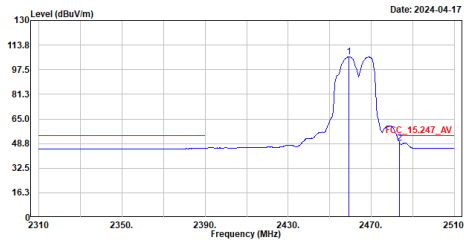

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.400	106.01	-----	-----	75.61	30.40	Average
2	2483.600	49.19	54.00	-4.81	18.75	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Peter

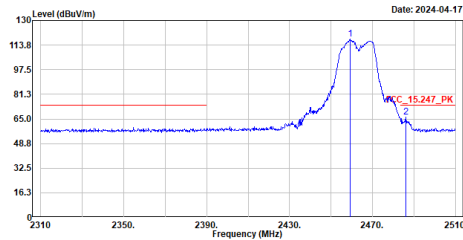

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.200	117.71	-----	-----	87.31	30.40	Peak
2	2486.000	66.06	74.00	-7.94	35.61	30.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Peter

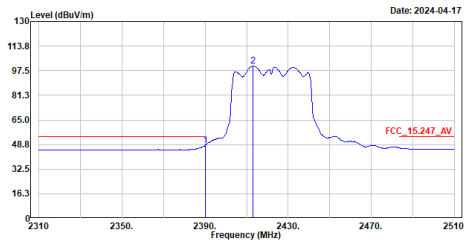

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	48.20	54.00	-5.80	17.59	30.61	Average
2	2413.000	100.52	-----	-----	69.98	30.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Peter

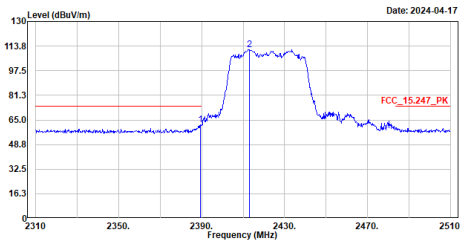

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	61.99	74.00	-12.01	31.39	30.60	Peak
2	2413.200	111.34	-----	-----	80.80	30.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Peter

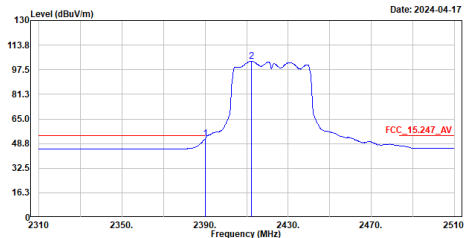

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	51.83	54.00	-2.17	21.22	30.61	Average
2	2412.000	103.07	-----	-----	72.53	30.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Peter

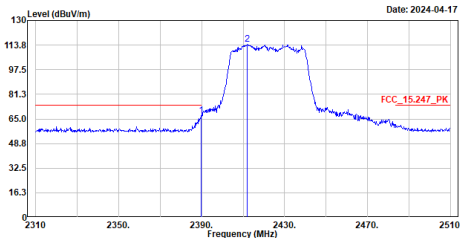

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	67.38	74.00	-6.62	36.77	30.61	Peak
2	2412.000	114.30	-----	-----	83.76	30.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Peter

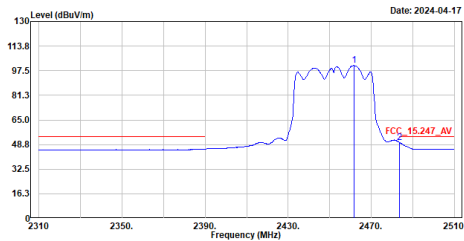

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.600	100.87	-----	-----	70.46	30.41	Average
2	2483.600	50.00	54.00	-4.00	19.56	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Peter

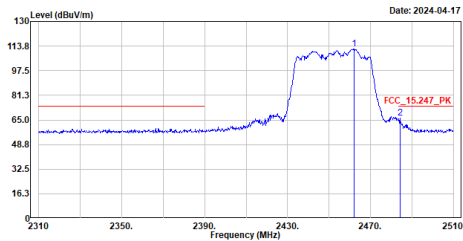

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.000	111.79	-----	-----	81.38	30.41	Peak
2	2484.200	66.25	74.00	-7.75	35.81	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Peter

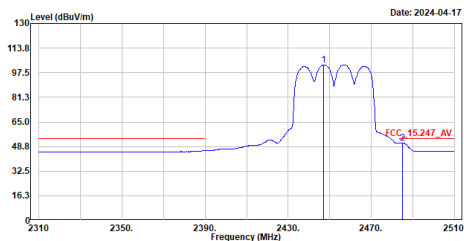

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2447.200	102.64	-----	-----	72.26	30.38	Average
2	2485.000	51.25	54.00	-2.75	20.00	30.45	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Peter

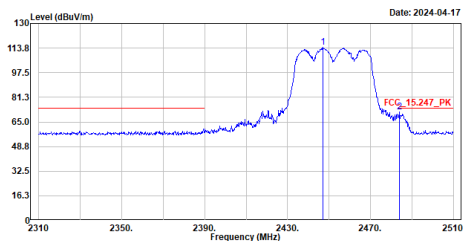

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2447.000	114.20	-----	-----	83.82	30.38	Peak
2	2484.000	71.43	74.00	-2.57	40.99	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
Test BY :Peter

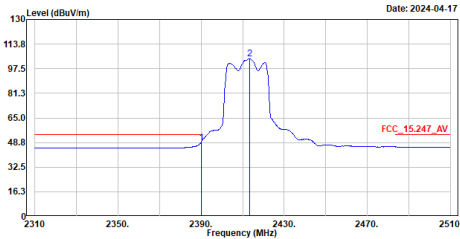

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	48.80	54.00	-5.20	18.19	30.61	Average
2	2413.400	104.19	-----	-----	73.65	30.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
Test BY :Peter

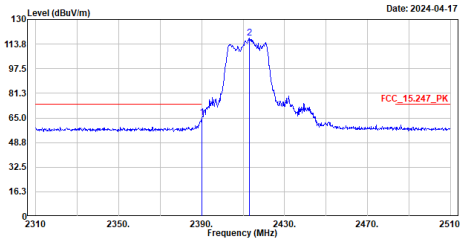

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	65.27	74.00	-8.73	34.66	30.61	Peak
2	2413.200	117.86	-----	-----	87.32	30.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
Test BY :Peter

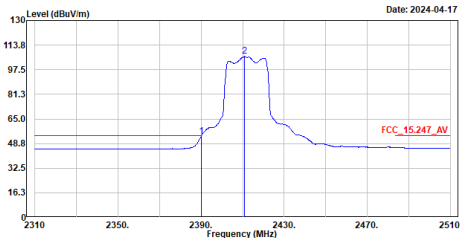

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	53.47	54.00	-0.53	22.86	30.61	Average
2	2410.800	106.24	-----	-----	75.70	30.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
Test BY :Peter

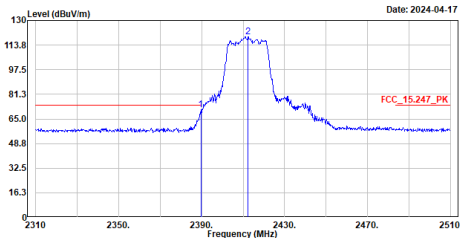

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.600	71.03	74.00	-2.97	40.42	30.61	Peak
2	2412.400	119.43	-----	-----	88.89	30.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
Test BY :Peter

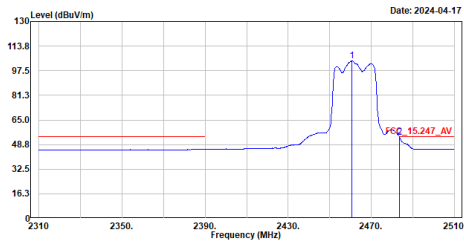

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.800	103.87	-----	-----	73.46	30.41	Average
2	2483.600	53.48	54.00	-0.52	23.04	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
Test BY :Peter

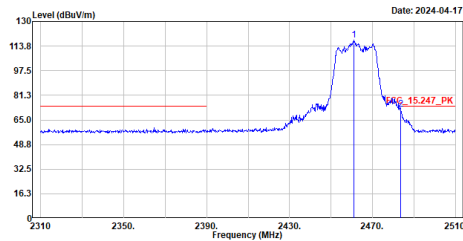

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	117.57	-----	-----	87.16	30.41	Peak
2	2483.600	72.11	74.00	-1.89	41.67	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
Test BY :Peter

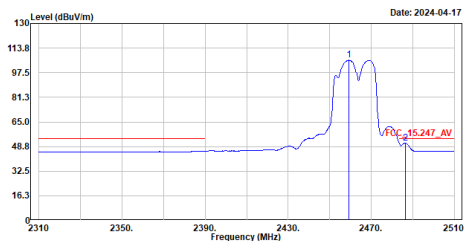

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.200	105.73	-----	-----	75.33	30.40	Average
2	2486.400	51.05	54.00	-2.95	20.60	30.45	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
Test BY :Peter

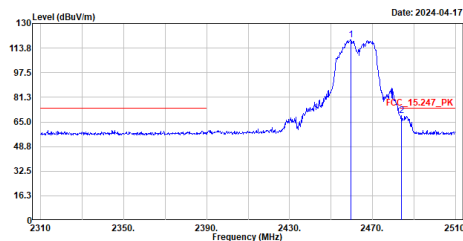

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.600	119.28	-----	-----	88.88	30.40	Peak
2	2483.800	69.18	74.00	-4.82	38.74	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Peter

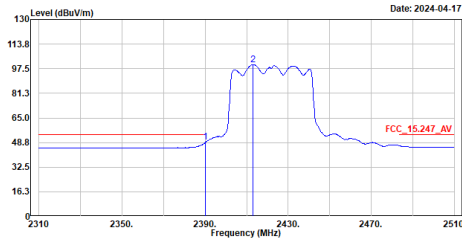


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	48.84	54.00	-5.16	18.23	30.61	Average
2	2413.200	100.23	-----	-----	69.69	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Peter

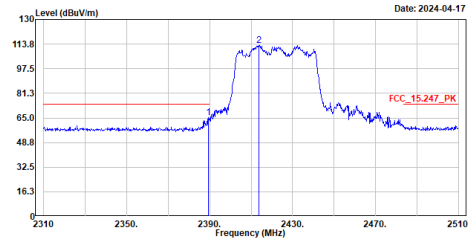


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	65.25	74.00	-8.75	34.65	30.60	Peak
2	2413.600	112.80	-----	-----	82.26	30.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Peter

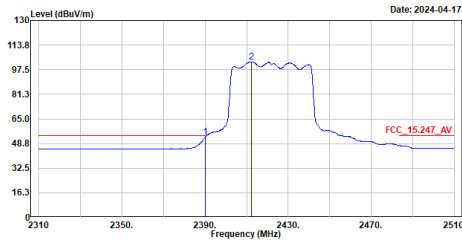


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.96	54.00	-1.04	22.35	30.61	Average
2	2412.200	102.73	-----	-----	72.19	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Peter

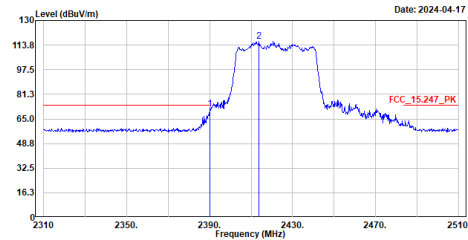


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	71.61	74.00	-2.39	41.00	30.61	Peak
2	2413.600	116.51	-----	-----	85.97	30.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
Test BY :Peter

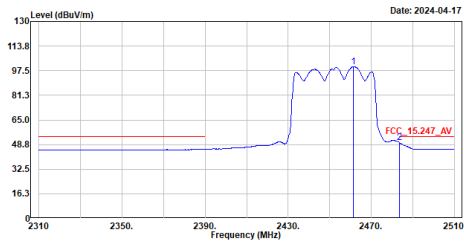

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.480	100.10	50.00	-4.00	69.69	30.41	Average
2	2483.600	50.00	50.00	-4.00	19.56	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
Test BY :Peter

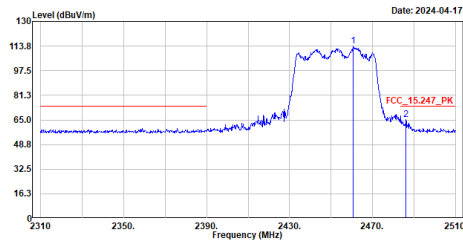

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.800	113.79	50.00	-8.75	83.38	30.41	Peak
2	2486.200	65.25	50.00	-8.75	34.80	30.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
Test BY :Peter

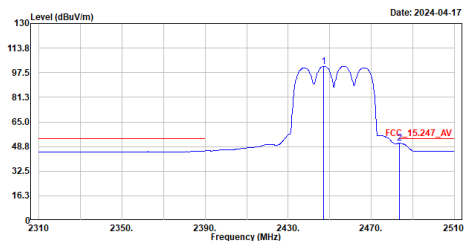

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2447.200	101.77	50.00	-3.15	71.39	30.38	Average
2	2483.600	50.00	50.00	-3.15	20.41	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
Test BY :Peter

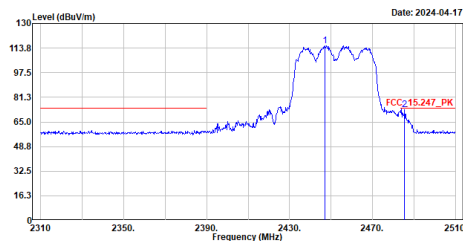


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2447.000	115.51	50.00	-1.01	85.13	30.38	Peak
2	2485.400	72.99	50.00	-1.01	42.54	30.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Co-Location

Site :HY-CB01
Condition :3m ,Horizontal
Mode :5GHR_N2_20M_IRB MID_CH372000+b_2412MHz
Test BY :Peter

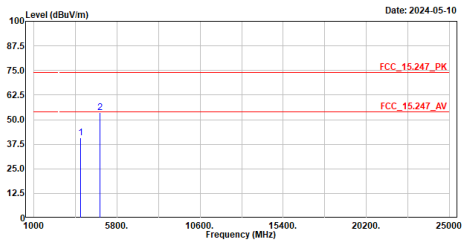


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3720.000	40.88	74.00	-33.12	56.99	-16.11	Peak
2	4824.000	53.63	74.00	-20.37	67.30	-13.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :5GHR_N2_20M_IRB MID_CH372000+b_2412MHz
Test BY :Peter

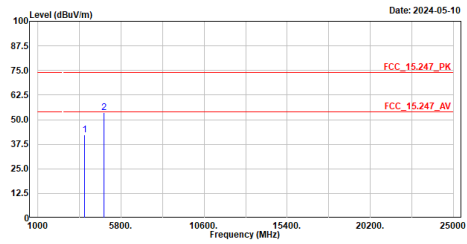


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3720.000	42.37	74.00	-31.63	58.48	-16.11	Peak
2	4824.000	53.57	74.00	-20.43	67.24	-13.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :5GHR_N2_20M_IRB MID_CH372000+b_2412MHz
Test BY :Peter

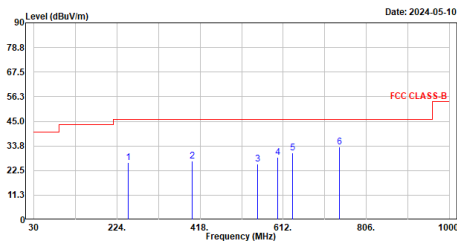


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	250.190	26.00	46.00	-20.00	50.82	-24.82	QP
2	399.570	26.67	46.00	-19.33	46.87	-20.20	QP
3	552.830	25.53	46.00	-20.47	42.54	-17.01	QP
4	599.390	28.62	46.00	-17.38	43.94	-15.32	QP
5	633.340	30.62	46.00	-15.38	45.62	-15.00	QP
6	742.950	33.27	46.00	-12.73	46.45	-13.18	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :5GHR_N2_20M_IRB MID_CH372000+b_2412MHz
Test BY :Peter

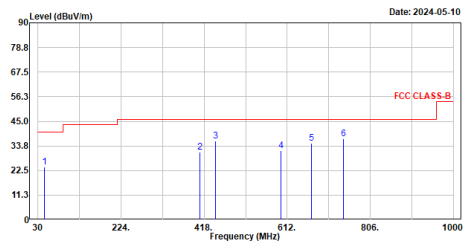

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	44.550	24.11	40.00	-15.89	47.75	-23.64	QP
2	408.300	30.92	46.00	-15.08	50.90	-19.98	QP
3	445.160	36.02	46.00	-9.98	54.92	-18.90	QP
4	597.450	31.68	46.00	-14.32	47.10	-15.42	QP
5	668.260	34.81	46.00	-11.19	49.40	-14.59	QP
6	742.950	36.89	46.00	-9.11	50.07	-13.18	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.