



OTA TEST REPORT

Applicant blackview
Project name PAD13
Date of report May 12,2023
Engineer WangZhiFeng



目录
contents

01

Test Laboratory

02

General Description of Equipment under Test

03

Test Conditions

04

Test Results

05

Equipment List



01

Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Shenzhen Maya Communication Equipment Co. , Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CERTIFICATE OF COMPLIANCE N° CC.126.2.16.MVI.A

Shenzhen Maya Communication Equipment Co. , Ltd. has been included in the Italian Institute of Laboratory Accreditation Executive Measurement

1.3 Testing Location

Company: Shenzhen Maya Communication Equipment Co. , Ltd.

Address: 2/F, Unit 2, Building 1, Guanghui Science and Technology Park, Minqing Road, Longhua District, Shenzhen City, Guangdong Province

Post code: 518000

Contact: WangZhiFeng

Telephone: 13823540870

Laboratory Environment

Temperature	22°C-25°C	
Relative humidity	≤80%	
Shield effect	0.7-6GHz	> 100dB
Ground resistance	<0.5Ω	



02

General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant Name	blackview
Applicant address	3 / F, Block B, Weidong Long Business Building, Longhua District, Shenzhen
Manufacturer Name	Shenzhen Maya Communication Equipment Co. , Ltd.
Manufacturer address	2/F, Unit 2, Building 1, Guanghui Science and Technology Park, Minqing Road, Longhua District, Shenzhen City, Guangdong Province

2.2 General Information

EUT Description	
Project name	PAD13
Antenna Type	PIFA
Antenna Manufacturer	Shenzhen Maya Communication Equipment Co. , Ltd.
Test Frequency	791-2700MHZ 2400-2500MHZ 1570-1580MHZ 5200-5800MHZ
Note:The EUT is sent from the applicant to MAYA and the information of the EUT is declared by the applicant. All indications of Pass/Fail in this report are opinions expressed by MAYA based on interpretations and/or observations of test results.Measurement Uncertainties were not taken into account and are published for informational purposes only.	

2.3

Test Date

The test is performed from May 8,2023to May 11,2023

2.4

Receiving Date

The sample was received on May 8,2023

2.5

Applied Standards

According to the specifications of the manufacturer,it must comply with the requirements of the following standards.

Test Method:Have been manufactured and tested following the MV Italy procedure and according to ISO 9001 requirements.

Test lab.of the antenna gain and radiation pattern measurement :
Shenzhen Maya Communication Equipment Co. , Ltd.



03

Test Conditions


Test method description and data

Device name	Purpose
Vector Network Analyzer	S11/Impedance/ Passive Test
Agilent 8960 SP6010 R&S CMU200	Mobile Communication Device Test including GSM, GPRS, EDGE, CDMA2000, 1XEV-DO, TD-SCDMA, WCDMA, HSDPA
R&S CMW500 MT8820C	Mobile phone test including TD-SCDMA, WCDMA, HSDPA, LTE, WIFI, GPS
SP9500E	Contains 5G, SA, NSA
Agilent E4438C	Test active GPS
MVG Chamber	Passive Test / OTA active Test / Efficiency/Gain

Passive Test Report

Test Equipment: Network analyzer

Test method: A 50 ohm CABLE is used to export from the instrument test port. After calibration, the SMA Joint of the handset is connected with the calibrated parts, and the data of the relevant frequency points such as echo loss or standing wave ratio is recorded.

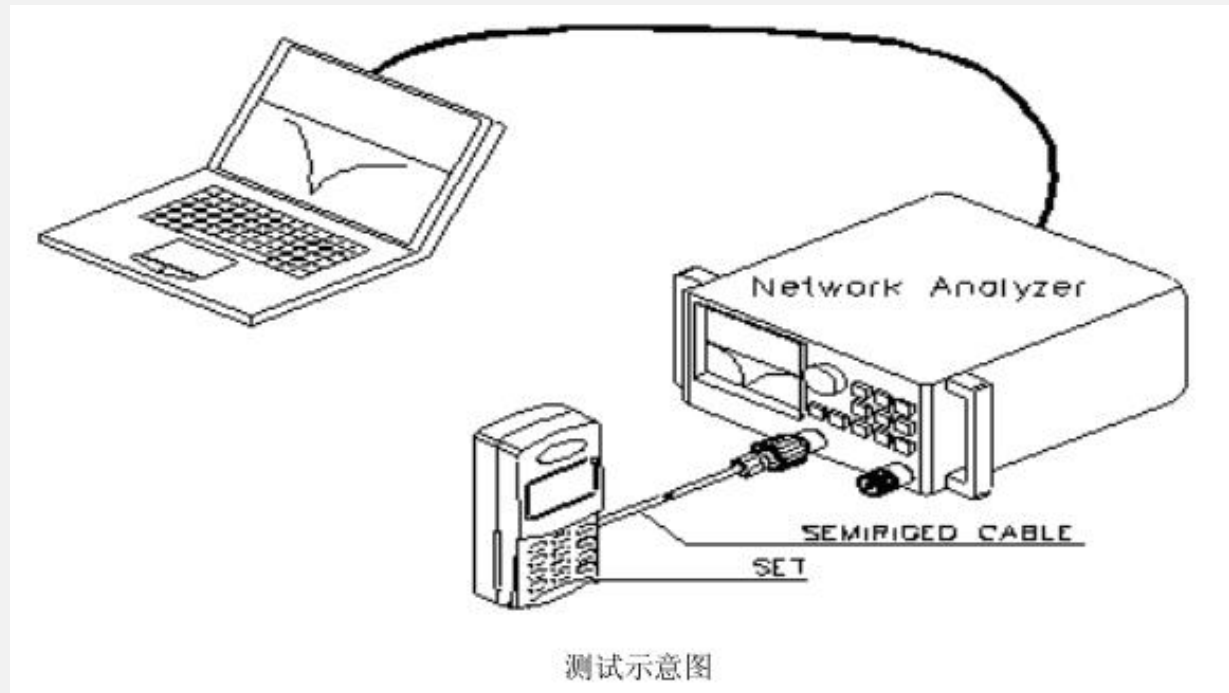

Active Test Report

TRP/TIS




Testing Tools: General Surveyor, Network Analyzer, full-wave Far-field ETS, French MVG SG24LT (Satmio) near-field 3D anechoic chamber, High Precision positioning system and its controller and computer test environment with automatic test program: Temperature $22^{\circ} \text{C} \pm 3^{\circ} \text{C}$, humidity $60\% \pm 15\%$: Using the Test Method and calculation of TRP in EST or Satimo 24LT system software, DUT (Device Under Test) is in the state of maximum transmitting power when TRP is tested, the position of the DUT is controlled by the positioning system. The 15-degree step is used to measure the 3D effective radiated power (EIRP) at each point. The mean value on the sphere is calculated by integrating, The formula is as follows:

$$TRP \cong \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} [EiRP_{\theta}(\theta_i, \phi_j) + EiRP(\theta_i, \phi_j)] \sin(\theta_i)$$

Active Test Report

In the TIS test, the DUT is in the state of maximum transmitting power. Three channels are selected to test. By controlling the position of the DUT, the receiving sensitivity of each point of the 3D is measured at a step length of 30 degrees, the mean value on the sphere is calculated by integration, The formula is as follows:

$$TIS \cong \frac{2NM}{\pi \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} \left[\frac{1}{EIS_{\theta}(\theta_i, \phi_j)} + \frac{1}{EIS_{\phi}(\theta_i, \phi_j)} \right] \sin(\theta_i)}$$

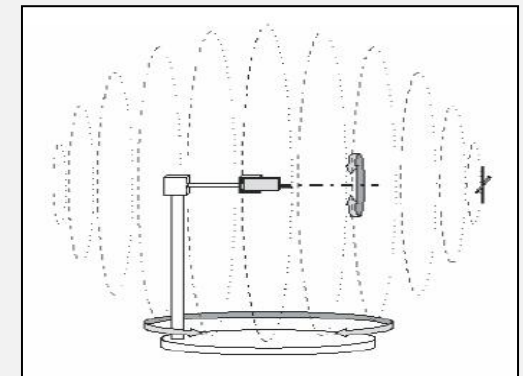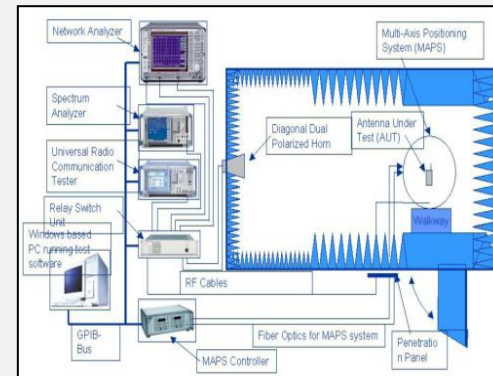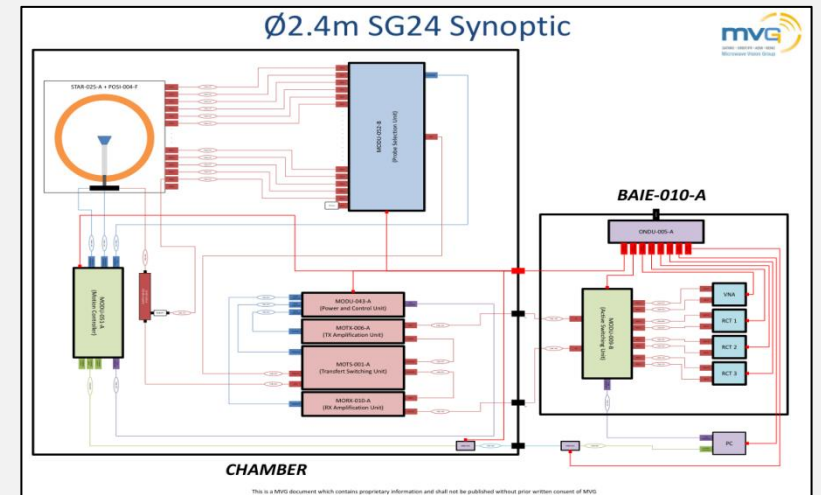



04

Test Results

5.1

Active test

	BAND	GSM900			DCS1800		
	CHANNAL	1	62	124	512	699	885
	TRP	27.18	27.24	27.05	24.24	24.66	24.7
	灭屏TIS			-102.89			-102.33
	亮屏TIS			-100.44			-101.77
	BAND	GSM850			PCS1900		
	CHANNAL	128	192	251	512	661	810
	TRP	25.56	26.12	26.77	24.25	24.34	24.66
	灭屏TIS			-101.12			-102.41
	亮屏TIS			-100.35			-102.22

5.1

Active test

	BAND	LTE-B1			LTE-B3		
	CHANNAL	Low	Medium	High	Low	Medium	High
	TRP	17.66	17.55	17.23	15.34	15.77	16.44
	灭屏TIS			-91.98			-91.67
	亮屏TIS			-91.54			-91.26
	分集TIS			-86.56			-86.24
	BAND	LTE-B7			LTE-B8		
	CHANNAL	Low	Medium	High	Low	Medium	High
	TRP	16.53	16.48	16.2	16.88	17.12	17.33
	灭屏TIS			-91.34			-90.03
	亮屏TIS			-90.77			-89.56
	分集TIS			-86.44			-86.22

5.1

Active test

	BAND	LTE-B20			LTE-B40		
	CHANNAL	Low	Medium	High	Low	Medium	High
	TRP	15.34	15.77	16.89	17.45	17.88	17.9
	灭屏TIS			-88.78			-90.22
	亮屏TIS			-86.65			-89.78
	分集TIS			-86.24			-86.25

	BAND	WCDMA-B1			WCDMA-B8		
	CHANNAL	Low	Medium	High	Low	Medium	High
	TRP	17.24	17.33	16.57	16.33	16.67	16.89
	灭屏TIS			-104.66			-103.11
	亮屏TIS			-104.14			-100.23



	BAND	WiFi_11b_CCK_11M			WiFi_11g_OFDM_54M		
WIFI	CHANNAL	L	M	H	L	M	H
	TRP	13.37	13.44	13.56	10.99	11.77	11.6
	TIS	--	--	-82.45	--	--	-70.88
	BAND	WiFi_11n_20M_MCS7			WiFi 5.8_11a_54M		
WIFI	CHANNAL	L	M	H	L	M	H
	TRP	10.55	10.7	11.12	11.66	11.37	11.8
	TIS	--	--	-65.12	--	--	-71.44
	BAND	WiFi 5.8_11ac					
WIFI	CHANNAL	L	M	H			
	TRP	10.23	10.57	11.46			
	TIS	--	--	-64.77			

Active test

Note:2G/3G/4G is only available in Europe, non-US technologies

RF Gain Specifications		
Product name		
产品型号		
trademark		Antenna Gain(dBi):
2G GSM Band	■ 850	-0.5
	■ 900	-0.3
	■ 1800	-0.1
	■ 1900	-0.1
3G WCDMA UMTS Band	■ FDD band I 2100	-0.1
	■ FDD band VIII 900	-0.3
4G LTE Band	■ LTE band 1	-0.1
	■ LTE band 3	-0.1
	■ LTE band 7	0.2
	■ LTE band 8	-0.3
	■ LTE band 20	-0.5
	■ LTE band40	0.1
WIFI 2.4GHz	■ 802.11b 2.4GHz	1
	■ 802.11g 2.4GHz	
	■ 802.11n(20M) 2.4GHz	
	■ 802.11n(40M) 2.4GHz	
WIFI 5GHz (CE)	■ 802.11a/n5150-5250	1
	802.11a/n 5250-5350 (DFS)	
	802.11a/n 5470-5725 (DFS)	
	802.11ac 80M 160M	
WIFI 5GHz (FCC)	■ 802.11a/n 5150-5250	1
	802.11a/n 5250-5350 (DFS)	
	802.11a/n 5470-5725 (DFS)	
	802.11a/n 5725-5850	
	802.11ac 80M 160M	
Bluetooth	■ Bluetooth 3.0通用蓝牙 (2.1+EDR)	0.1
	■ Bluetooth 4.0BLE only (4.0单模)	
	Bluetooth 4.0with BLE (4.0双模)	
	■ Bluetooth 5.1with BLE (4.1双模)	
GPS	■ 1.57GHz	-0.2