

# TEST REPORT

No.: 20835060b/15-C1







According to  
**FCC Regulations:**  
 Part 22, Part 24, Part 27

**IC-Regulations:**  
 RSS-132 Issue 3  
 RSS-133 Issue 6  
 RSS-139, Issue 2  
 RSS-Gen Issue 4

for

Gemalto M2M GmbH

Wireless Module PLS8-X  
 FCC-ID: QIPPLS8-X  
 IC: 7830A-PLS8X  
 PMN: Cinterion PLS8-X, HVIN: PLS8-X

Laboratory Accreditation and Listings			
 Deutsche Akkreditierungsstelle D-PL-12047-01-01	 MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
 AUTHORIZED RF LABORATORY	 LAB CODE 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
<p align="center"> <b>CETECOM GmbH</b>            Laboratory Radio Communications &amp; Electromagnetic Compatibility            Im Teelbruch 116 • 45219 Essen • Germany            Registered in Essen, Germany, Reg. No.: HRB Essen 8984            Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964            E-mail: info@cetecom.com • Internet: www.cetecom.com         </p>			

## Table of contents

<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>3</b>
1.1. Tests overview of US CFR Title 47 Part 22/24/27 and Canada IC (RSS) Standards .....	3
1.2. Attestation:.....	4
<b>2. ADMINISTRATIVE DATA .....</b>	<b>5</b>
2.1. Identification of the testing laboratory .....	5
2.2. Test location .....	5
2.3. Organizational items .....	5
2.4. Applicant’s details .....	5
2.5. Manufacturer’s details .....	5
<b>3. EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
3.1. TECHNICAL W-CDMA DATA OF MAIN EUT DECLARED BY APPLICANT .....	6
3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....	7
3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions .....	7
3.4. EUT set-ups .....	8
3.5. EUT operating modes .....	8
3.6. RMC99 SETTINGS.....	9
3.7. 3GPP Release 99 .....	9
3.8. Additional declaration and description of EUT .....	11
3.9. Configuration of cables used for testing .....	12
<b>4. DESCRIPTION OF TEST SYSTEM SET-UP’S .....</b>	<b>13</b>
4.1. Test system set-up for conducted measurements at antenna port .....	13
4.2. Test system set-up for radiated magnetic field measurements below 30 MHz .....	15
4.3. Test system set-up for radiated spurious emission measurements .....	16
<b>5. MEASUREMENT RESULTS.....</b>	<b>17</b>
5.1. RF-Parameter - RF Peak power output conducted and PAPR-value .....	17
5.2. RF-Parameter - RF Peak power output radiated .....	19
5.3. RF-Parameter - Occupied bandwidth and emission bandwidth .....	21
5.4. RF-Parameter - Conducted out of Band RF emissions and Band Edge .....	23
5.5. General Limit - Radiated field strength emissions below 30 MHz.....	26
5.6. RF-Parameter - Radiated out of Band RF emissions and Band Edge .....	28
5.7. RF-Parameter - Frequency stability on temperature and voltage variations .....	32
5.8. Measurement uncertainties .....	39
<b>6. ABBREVIATIONS USED IN THIS REPORT .....</b>	<b>40</b>
<b>7. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES .....</b>	<b>40</b>
<b>8. INSTRUMENTS AND ANCILLARY .....</b>	<b>41</b>
<b>9. VERSIONS OF TEST REPORTS (CHANGE HISTORY) .....</b>	<b>44</b>

## Table of annex

	Total pages
Annex 1: Measurement diagrams	71
Annex 2: External photographs of EUT	7
Annex 3: Internal photographs of EUT	TO BE SUPPLIED BY APPLICANT
Annex 4: Test set-up photographs	5

The listed attachments are an integral part of this report.

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies. This test report shows results for W-CDMA technologies only. Other implemented wireless technologies were not considered within this test report.

### 1.1. Tests overview of US CFR Title 47 Part 22/24/27 and Canada IC (RSS) Standards

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	AC-Power Lines Emissions Conducted (0,15 - 30 MHz)	AC-Power lines (conducted)	§15.207	RSS-Gen, Issue 4: Chapter 8.8	§15.207 limits  IC: Table 3	--	--	Remark 1.)
2	General field strength emissions (9 kHz - 30 MHz)	Cabinet + inter-connecting cables (radiated)	§15.209(a)	RSS-Gen, Issue 4: Chapter 8.9, Table 5	2400/F(kHz) $\mu$ V/m 24000/F(kHz) $\mu$ V/m 30 $\mu$ V/m	2	1+2+3	Passed
7	RF-Power (ERP/EIRP)		§2.1046	RSS-132: 5.4 SRSP-503: 5.1.3	< 7 Watt (ERP)	2	1+2+3	passed
			§22.913(a)(2)	RSS-133:4.1/6.4 SRSP-510: 5.1.2	< 2 Watt (EIRP)			
			§24.232(c) §27.50(d)(4)	RSS-139: Issue 3 Chapt. 6.5 SRSP-513: 5.1.2	< 1 Watt (EIRP)			
8	Spurious emissions		§2.1053(a) §2.1057	RSS-132: 5.5(i)(ii)  RSS-133: 6.5.1(i)(ii)	Required attenuation below P(dBW): 43+10log(P) dBc	3	1+2+3	passed
9	Band-Edge compliance	§22.917(a)(b) §24.238(a)(b)	RSS-139: Issue 3 Chapt. 6.6 (i) (ii)	3		1+2+3	passed	

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
30	RF Power	Antenna terminal  (conducted)	§2.1046	RSS-132, Issue 3: Chapter 5.4 SRSP-503: 5.1.3	< 7 Watt (ERP)	1	1+2+3	Passed
				RSS-133, Issue 6: Chapter 4.1/6.4 SRSP-510: 5.1.2	< 2 Watt (EIRP)			
				RSS-139, Issue 3: Chapter 6.5	< 1 Watt (EIRP)			
34	26dB Emission bandwidth		§2.202 §2.1049(h) §22.917(a) §24.238(a) §27.53(h)	RSS-Gen: 4.6.1	99% Power	1	1+2+3	Passed
35	99% Occupied bandwidth					1	1+2+3	Passed
36	Spurious emissions		§2.1051 §2.1057	RSS-132, Issue 3: 5.5(i)(ii) RSS-133, Issue 6: 6.5.1(i)(ii) RSS-139, Issue 3 Chapt. 6.6 (i) (ii)	Required attenuation below P(dBW): 43+10log(P) dBc	1	1+2+3	Passed
37	Band-Edge compliance		§22.917(a)(b) §24.238(a)(b) §27.53(h)			1	1+2+3	Passed
38	Frequency stability		§2.1055(a)(2) §22.355	RSS-132: Chapter 5.3	<b>FCC/IC:</b> < ±2.5ppm	1	1+2+3	Passed
			§24.235 Table C-1	RSS-133: Chapter 6.3	<b>FCC/IC:</b> fundamental emissions stay within the authorized bands  <b>IC:</b> < ±2.5ppm			
		§27.54	RSS-139, Issue 3: Chapter 6.4	<b>FCC/IC:</b> fundamental emissions stay within the authorized bands				

Remarks:

1.) EUT DC powered only, test to be performed on OEM side if applicable

**1.2. Attestation:**

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

The test report version TR-20835060b/15-C1 dated 2015-08-01 substitutes report no. TR-20835060b/15 dated from 2015-06-28. The substituted report gets invalid herewith.

.....  
Dipl.-Ing. Rachid Acharkaoui  
Responsible for test section

.....  
Dipl.-Ing. C. Lorenz  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Niels Jeß
Deputy:	Dipl.-Ing. Rachid Acharkaoui

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

### 2.3. Organizational items

Responsible for test report and project leader:	Dipl.-Ing. C. Lorenz
Receipt of EUT:	2015-03-02
Date(s) of test:	2015-03-02 to 2015-04-24; 2015-08-01
Date of report:	2015-08-01
-----	
Version of template:	13.02

### 2.4. Applicant's details

Applicant's name:	Gemalto M2M GmbH
Address:	Siemensdamm 50 13629 Berlin  Germany
Contact person:	Mr. Thorsten Liebig

### 2.5. Manufacturer's details

Manufacturer's name:	please see Applicant's details
Address:	please see Applicant's details

### 3. Equipment under test (EUT)

#### 3.1. TECHNICAL W-CDMA DATA OF MAIN EUT DECLARED BY APPLICANT

Main function	Wireless Module		
Type	PLS8-X		
TX-frequency range	<input checked="" type="checkbox"/> FDD Band 2: 1852.4–1907.6 MHz (Uplink), 1930-1990 MHz (Downlink) <input checked="" type="checkbox"/> FDD Band 4: 1712.4–1752.6 MHz (Uplink), 2110-2155 MHz (Downlink) <input checked="" type="checkbox"/> FDD Band 5: 826.4-846.6 MHz (Uplink), 869-894 MHz (Downlink)		
Type of modulation	<input checked="" type="checkbox"/> FDD-Mode Release99: QPSK <input checked="" type="checkbox"/> FDD Mode Release 5+6: 16QAM additional		
Number of channels	<input checked="" type="checkbox"/> FDD Band 2: UARFCN range 9262 – 9400 – 9538 <input checked="" type="checkbox"/> FDD Band 4: UARFCN range 1312 – 1450 – 1513 <input checked="" type="checkbox"/> FDD Band 5: UARFCN range 4132 – 4183 – 4233		
UMTS-HSPA connectivity	<input checked="" type="checkbox"/> Uplink speed: 5.76 Mb/s (category 6) <input type="checkbox"/> Uplink speed:		
Emission designator(s)	4M18F9W		
Antenna Type	<input type="checkbox"/> Integrated (enclosure) <input type="checkbox"/> External - dedicated, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector		
Antenna Gain Tx (main)	<input checked="" type="checkbox"/> Value: 0dBd (Data sheet) <input type="checkbox"/> No information from customer		
Antenna Gain Dx (diversity)	<input type="checkbox"/> Not applicable <input checked="" type="checkbox"/> Value: 0dBd (Data sheet) <input type="checkbox"/> No information from customer		
MAX PEAK Output Power: Radiated	FDD-Mode 2	26.82 dBm (PK)	
	FDD-Mode 4	25.64 dBm (PK)	
	FDD-Mode 5	26.86 dBm (PK)	
MAX PEAK Output Power: Conducted	FDD-Mode 2	27.24. dBm (PK) / 24.22 dBm (AV)	
	FDD-Mode 4	27.41 dBm (PK) / 24.19 dBm (AV)	
	FDD-Mode 5	27.23 dBm (PK) / 23.87 dBm (AV)	
FCC-ID	QIPPLS8-X		
IC	7830A-PLS8X		
Installed option	<input checked="" type="checkbox"/> GPS (not tested within this test report)		
Power supply	<input checked="" type="checkbox"/> DC power only: 3.5 to 4.2Volt		
Special EMI components	--		
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamics microphones, etc.?	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	

### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	Wireless Module	PLS8-X	IMEI: 004401081421 360	Rev. 2.3	Rev. 02.502
EUT B	Wireless Module	PLS8-X	IMEI: 004401081421 345	Rev. 2.3	Rev. 02.502

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	SMARTEQ MiniMag. mount antenna 1	2.6m RG174, SMA-m 0dBd, 824-960 / 1710-2170MHz	59801B	1140.26 SMA	--
AE 2	SMARTEQ MiniMag. mount antenna 2	2.6m RG174, SMA-m 0dBd, 824-960 / 1710-2170MHz	59801B	1140.26 SMA	--
AE 3	SMARTEQ MiniMag. mount antenna 3	2.6m RG174, SMA-m 0dBd, 824-960 / 1710-2170MHz	59801B	1140.26 SMA	--
AE 4	DSB75-Adapter	DSB75	W30880-Q9812-X-2	AH6-DSB75-1	--
AE 5	Handset Votronic	Telephone receiver with RJ11 connector	4017953211 311	HH-SI-30.3/V3.0/0	--
AE 6	USB cable	1m	--	--	--
AE 7	CETECOM Notebook	Dell Latitude E6420	CTC01034	--	Windows 7 + Terminal Program + Driver USB

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
set. 1	EUT A + AE 4 + AE 5 + AE 6 (+ AE 7)	Set-up for conducted RF-tests. AE 7 used only temporary for setting up right AT-commands
set. 2	EUT A + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 (+ AE 7)	Set-up for radiated RF-tests. AE 7 used only temporary for setting up right AT-commands
set. 3	EUT B + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 (+ AE 7)	Set-up for radiated RF-tests. AE 7 used only temporary for setting up right AT-commands

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
1	FDD-Band 2 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E. The description of the settings performed can be found in chapter 3.5
2	FDD-Band 4 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E. The description of the settings performed can be found in chapter 3.5
3	FDD-Band 5 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E. The description of the settings performed can be found in chapter 3.5

\*) EUT operating mode no. is used to simplify the test report.



### 3.6. RMC99 SETTINGS

#### Output power considerations for WCDMA mobile equipment

The maximum output power is verified for Low, Middle and High channels according the general descriptions in section 5.2 of 3GPP TS34.121. Following table shows the references to the relative chapter.

Test	Rel99	HSDPA		HSUPA
Max. Power	5.2	5.2A	5.2AA	5.2B

### 3.7. 3GPP Release 99

The default test configuration and radio link is 12.2 kbps Reference Measurement Channel configured in test loop mode 1. This RMC defines one code channel in I-branch (DPDCH) and one code channel on the Q-branch. (DPCCH). Compressed mode is switched off.

The uplink contains one DPCCH and up to 6 DPDCH channels. The radio link contain simultaneous data, voice, data, video and packet data and signalling. The nominal maximum output power are defined according to the power class of the EUT. All the parameters are defined using the UL reference measurement channel (12.2kbps), as specified in clause C.2.1 of 3GPP TS34.121.

#### C.2.1 UL reference measurement channel (12,2 kbps)

The parameters for the 12,2 kbps UL reference measurement channel are specified in table C.2.1.1, table C 2.1.2, table C 2.1.3 and table C.2.1.4. The channel coding for information is shown in figure C.2.1

**Table C.2.1.1: UL reference measurement channel physical parameters (12,2 kbps)**

Parameter	Level	Unit
Information bit rate	12,2	kbps
DPDCH	60	kbps
DPCCH	15	kbps
DPCCH Slot Format #i	0	-
DPCCH/DPDCH power ratio	-5,46	dB
TFCI	On	-
Repetition	23	%
NOTE: Slot Format #2 is used for closed loop tests in clause 7.6.2. Slot Format #2 and #5 are used for site selection diversity transmission tests in subclause 7.6.3.		

**Table C.2.1.2: UL reference measurement channel using RLC-TM for DTCH, transport channel parameters (12.2 kbps)**

Higher Layer	RAB/Signalling RB	RAB	SRB	
RLC	Logical channel type	DTCH	DCCH	
	RLC mode	TM	UM/AM	
	Payload sizes, bit	244	88/80	
	Max data rate, bps	12200	2200/2000	
	PDU header, bit	N/A	8/16	
	TrD PDU header, bit	0	N/A	
MAC	MAC header, bit	0	4	
	MAC multiplexing	N/A	Yes	
Layer 1	TrCH type	DCH	DCH	
	Transport Channel Identity	1	5	
	TB sizes, bit	244	100	
	TFS	TF0, bits	0*244	0*100
		TF1, bits	1*244	1*100
	TTI, ms	20	40	
	Coding type	Convolution Coding	Convolution Coding	
	Coding Rate	1/3	1/3	
	CRC, bit	16	12	
	Max number of bits/TTI after channel coding	804	360	
	Uplink: Max number of bits/radio frame before rate matching	402	90	
RM attribute	256	256		

**Table C.2.1.3: UL reference measurement channel, TFCS (12.2 kbps)**

TFCS size	4
TFCS	(DTCH, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1)

**In order to measure the maximum output power the base station set and send continuously power control commands to the EUT. TPC bits were set all up (“1”).**

### Physical channels during connection for non-HSDPA test cases

The following clauses describe the downlink Physical Channels that are transmitted during a connection i.e., when measurements are done. For these measurements the offset between DPCH and SCH shall be zero chips at base station meaning that SCH is overlapping with the first symbols in DPCH in the beginning of DPCH slot structure.

#### E.3.1 Measurement of Tx Characteristics

Table E.3.1 is applicable for measurements on the Transmitter Characteristics (clause 5) with the exception of clauses 5.3 (frequency error), 5.4.1, 5.4.4 and 5.5.2.

**Table E.3.1: Downlink Physical Channels transmitted during a connection**

Physical Channel	Power
I <sub>or</sub>	-93 dBm / 3,84MHz
CPICH	CPICH_Ec / DPCH_Ec= 7 dB
P-CCPCH	P-CCPCH_Ec / DPCH_Ec= 5 dB
SCH	SCH_Ec / DPCH_Ec = 5 dB
PICH	PICH_Ec / DPCH_Ec= 2 dB
DPCH	-103,3 dBm / 3,84MHz

#### E.3.2 Measurement of Rx Characteristics

**Table E.3.2.1** is applicable for measurements on the *Receiver Characteristics* (clause 6) including clauses 5.3 of 3GPP, Frequency Error.

**Table E.3.2.2** describes the downlink Physical Channels that are required for the test of Spurious Emissions (clause 6.8). The UE is in the CELL\_FACH state during the measurement.

**Table E.3.2.2: Downlink Physical Channels transmitted during the RX Spurious Emissions test**

Physical Channel	Power
CPICH	-86dBm / 3,84MHz
P-CCPCH	P-CCPCH_Ec / CPICH_Ec= -2 dB
SCH	SCH_Ec / CPICH_Ec= -2 dB
PICH	PICH_Ec / CPICH_Ec= -5 dB
S-CCPCH	S-CCPCH_Ec / CPICH_Ec= -2 dB

### 3.8. Additional declaration and description of EUT

(Applicant's declaration,  = not selected,  = selected)

EUT A / EUT B		<input type="checkbox"/> table-top <input type="checkbox"/> floor-standing <input type="checkbox"/> wall-mounted <input checked="" type="checkbox"/> not defined	typical use <input type="checkbox"/> portable use <input type="checkbox"/> fixed use <input type="checkbox"/> vehicular use <input checked="" type="checkbox"/> general	typical operating cycle of EUT. <input checked="" type="checkbox"/> < 0,5 sec. <input type="checkbox"/> :
Place of use		<input type="checkbox"/> Residential, commercial and light industry <input type="checkbox"/> Industrial environment <input type="checkbox"/> vehicular use <input checked="" type="checkbox"/> general		
Highest frequency generated or used in the device or on which the device operates or tunes		<input type="checkbox"/> below 1.705 MHz -> up to 30 MHz <input type="checkbox"/> 1.705 MHz – 108 MHz -> up to 1 GHz <input type="checkbox"/> 108 MHz -500 MHz -> up to 2 GHz <input type="checkbox"/> 500MHz 1000 MHz -> up to 5 GHz <input checked="" type="checkbox"/> Above 1000 MHz -> 5 <sup>th</sup> harmonic or 40 GHz		
<b>Power line:</b> <input type="checkbox"/> AC <input type="checkbox"/> L1, <input type="checkbox"/> L2, <input type="checkbox"/> L3, <input type="checkbox"/> N _____Hz <input type="checkbox"/> 12V, <input type="checkbox"/> 24V, <input type="checkbox"/> 230V, <input type="checkbox"/> 400V <input checked="" type="checkbox"/> DC <input checked="" type="checkbox"/> Range 3.5 to 4.2 V over AE4 Tested at 4.2V DC Internally regulated		EUT-grounding: <input checked="" type="checkbox"/> none <input type="checkbox"/> with power supply <input type="checkbox"/> additional: <p style="text-align: right; font-size: small;">(in case of deviation during tests the single details are described on chapter 4)</p>		
<b>Other Ports</b> (description of interconnecting cables)		possible total cable length	shielding	connected during test
	Connector			
1. Antenna Main	SMA	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
2. Antenna Second	SMA	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
3. GPS -line	SMA	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
4. USB-line	Mini-USB	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
5. Handset Line	RJ11	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input type="checkbox"/> screened <input checked="" type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamic microphones, etc.?				<input type="checkbox"/> yes <input checked="" type="checkbox"/> no
Is mounting position / usual operating position defined?				<input type="checkbox"/> yes <input checked="" type="checkbox"/> no

### 3.9. Configuration of cables used for testing

Cable number	Item	Type	S/N serial number	HW hardware status	Cable length
Cable 1	USB Port	--	--	--	1 m
Cable 2	Handset line	--	--	--	1.5 m
Cable 3	RF-antenna port 1 (main)	--	--	--	1.5 m
Cable 4	RF-antenna port 2 (secondary)	--	--	--	1.5 m
Cable 5	RF-antenna port 3 (GPS)	--	--	--	1.5 m

## 4. Description of test system set-up's


### 4.1. Test system set-up for conducted measurements at antenna port

**Cellular Conducted RF-Setup 1 (Cel-1 Set-up)**

**Tests Specification:** Conducted spurious emissions, Emission Bandwidth

**General Description:** The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) before it is 0° divided by a power divider (3). One of the RF-signal path is connected to the test unit communication tester (4), other RF-path is connected to the spectrum – analyzer (5) for specific RF-measurements. The specific attenuation losses for both signal paths/branches are determined prior to the measurement within a set-up calibration. These are then taken into account by correcting the measurement readings on the spectrum-analyzer.

**Schematic:**

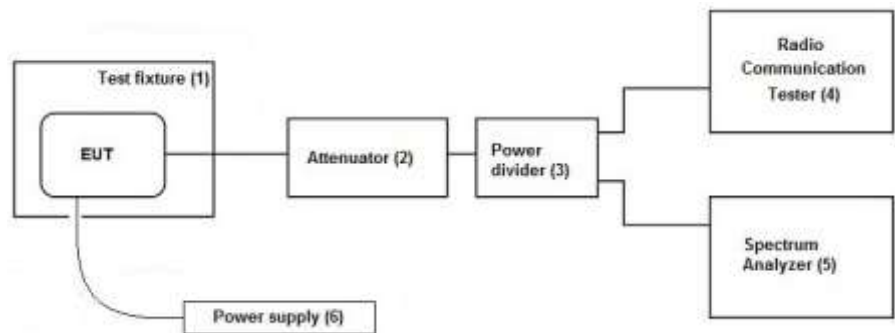


Used Equipment:	Passive Elements	Test Equipment	Remark:
	<input checked="" type="checkbox"/> 10 dB Attenuator (#530)	<input checked="" type="checkbox"/> CMU200 Communication Test-Unit for GSM/W-CDMA	See List of equipment under each test case and chapter 8 for calibration info
	<input checked="" type="checkbox"/> Low loss RF-cables	<input checked="" type="checkbox"/> DC-Power Supply	
	<input checked="" type="checkbox"/> 6 dB resistive power divider/coupler (#529)	<input checked="" type="checkbox"/> Spectrum-Analyser	
<b>Testing method:</b>	ANSI C63.10:2013, KDB 971168 D01 v02r02		
<b>Measurement uncertainty:</b>	See chapter Measurement Uncertainties (Cel-1)		

**Cellular Conducted RF-Setup 2 (Cel-2 Set-up)**

**Tests Specification:** Conducted Carrier power, Frequency Error

**Schematic:** Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5)

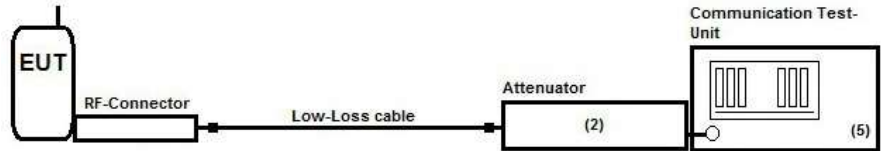

**Testing method:** ANSI C63.10:2013, KDB 971168 D01 v02r02

Used Equipment	Passive Elements	Test Equipment	Remark:
	<input checked="" type="checkbox"/> 20 dB Attenuator (#613)	<input checked="" type="checkbox"/> CMU200 Communication Test-Unit for GSM/W-CDMA	See List of equipment under each test case and chapter 8 for calibration info
	<input checked="" type="checkbox"/> Low loss RF-cables	<input checked="" type="checkbox"/> DC-Power Supply	

**Measurement uncertainty** See chapter Measurement Uncertainties (Cel-2)


## 4.2. Test system set-up for radiated magnetic field measurements below 30 MHz

**Specification:** ANSI C63.4-2014 chapter 8.2.1, ANSI C63.10-2013 Chapter 6.4

**General Description:** Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

**Schematic:**

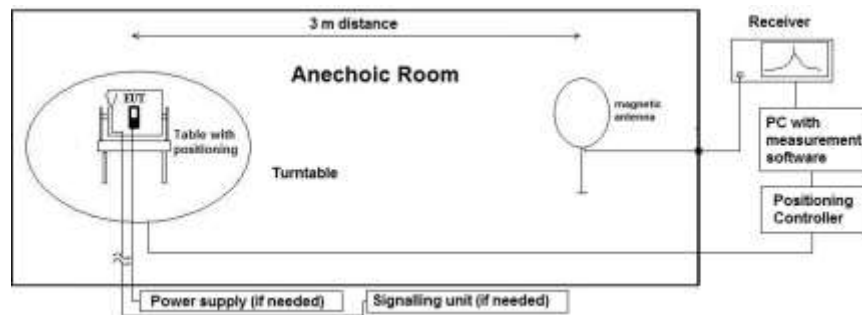

**Testing method:**

**Exploratory, preliminary measurement**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT’s worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

- AF = Antenna factor
- C<sub>L</sub> = Cable loss
- D<sub>F</sub> = Distance correction factor
- E<sub>C</sub> = Electrical field – corrected value
- E<sub>R</sub> = Receiver reading
- G<sub>A</sub> = Gain of pre-amplifier (if used)
- L<sub>T</sub> = Limit
- M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:**

Reference for applied correction (extrapolating) factors due to reduced measurement distance:


ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)

### 4.3. Test system set-up for radiated spurious emission measurements

**Specification:** ANSI C63.10-2013 chapter 6.6.3.3 & 6.6.4

**General Description:** Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

**Schematic:**

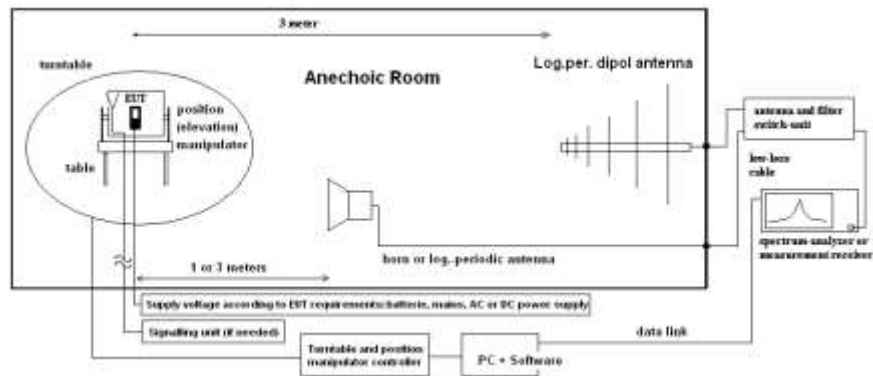

**Testing method:**

**Exploratory, preliminary measurements**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software. The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions. On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out. The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{C_{E(I)RP}} = E_C - 95.2 \text{ dB}$$

$$M = L_T - E_{C_{E(I)RP}}$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$AF$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor (if used)

$G_A$  = Gain of pre-amplifier (if used)

$E_{C_{E(I)RP}}$  = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.



## 5. Measurement results

### 5.1. RF-Parameter - RF Peak power output conducted and PAPR-value

#### 5.1.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2				
test site	<input type="checkbox"/> 347 Radio.lab. 1	<input checked="" type="checkbox"/> Radio.lab. 2				
spectr. analys.	<input type="checkbox"/> 584 FSU	<input checked="" type="checkbox"/> 489 ESU 40	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/> 620 ESU 26		
signaling	<input type="checkbox"/> 392 MT8820A	<input checked="" type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU	<input type="checkbox"/> 460 CMU		
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 378 RadiSense	
DC power	<input type="checkbox"/> 611 E3636A	<input checked="" type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 498 NGPE 40
otherwise	<input type="checkbox"/> 331 HC 4055	<input checked="" type="checkbox"/> 530 10 dB Att.	<input type="checkbox"/> 529 Power div.	<input checked="" type="checkbox"/> - cable OTA20		
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000			

#### 5.1.2. Requirements and limits

<b>FCC</b>	<input checked="" type="checkbox"/> §2.1046 <input checked="" type="checkbox"/> §22.913(a)(2) <input checked="" type="checkbox"/> § 24.232(c) <input checked="" type="checkbox"/> § 27.50(d)(4)
<b>IC</b>	<input checked="" type="checkbox"/> RSS-132: 5.4 + SRSP 503:5.1.3 <input checked="" type="checkbox"/> RSS-133: 4.1/6.4 + SRSP-510:5.1.2 <input checked="" type="checkbox"/> RSS-139, Issue 3: 6.5
<b>KDB</b>	971168 D01 v02r02, October 2014
<b>Limits E(IRP)</b>	Maximum Power Output of the wireless device should be determined while measured radiated E(IRP)
	<input checked="" type="checkbox"/> Limit FDD Band 5: 7 Watt ERP (38.4 dBm)
	<input checked="" type="checkbox"/> Limit FDD Band 2: 2 Watt EIRP (33.0 dBm)
	<input checked="" type="checkbox"/> Limit FDD Band 4: 1 Watt EIRP (30.0 dBm)
<b>PAPR-Limit</b>	13dB for 0.1% of the time

#### 5.1.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port" ANRITSU	
Measurement method	<p>The measurements were performed with the integrated power measurement function of the „radio communication tester CMU200 from Rohde&amp;Schwarz company. In this way spectrum-analyzers instrument limitations can be avoided or minimized. Instead, CMU manufacturers declared measurement error can be considered for this measurement.</p> <p>The attenuation (insertion loss) at the RF Inputs/Outputs of CMU were set according the path loss of the test set-up, determined in a step before starting the measurements. A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)</p> <p>Peak and Average Values have been recorded for each channel and band. The Peak-to -Average-Ratio is determined by integrated CCDF function of the ESU spectrum-analyzer. Details to the settings used can be taken from the diagrams enclosed in annex 1.</p>	
EUT settings	<p>A call was established on highest power transmit conditions in RMC99 mode.</p> <p>UE is set TX mode, highest transmit power conditions, DTX, MPR or other power saving techniques have been disabled</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.</p>	

**5.1.4. Measurement Results**

FDD Band 2								
EUT	Set-up 1, Op. Mode 1							
Test case	Power value [dBm]						Limit	Result
	UARFCN no. 9262		UARFCN no. 9400		UARFCN no. 9538			
	PK	AV	PK	AV	PK	AV	[dBm]	
Release 99 12.2kbps RMC	27.00	23.88	27.24	24.22	26.51	23.53	33	Passed
Peak-to Average ratio [dB]	2.92		2.81		2.75		13	Passed

Remark: values within applicant's declared power range (tune-up range)

FDD Band 4								
EUT	Set-up 1, Op. Mode 2							
Test case	Power value [dBm]						Limit	Result
	UARFCN no. 1312		UARFCN no. 1450		UARFCN no. 1513			
	PK	AV	PK	AV	PK	AV	[dBm]	
Release 99 12.2kbps RMC	26.83	23.65	27.41	24.12	27.30	24.19	30	Passed
Peak-to Average ratio [dB]	2.96		2.92		2.94		13	Passed

Remark: values within applicant's declared power range (tune-up range)

FDD Band 5								
EUT	Set-up 1, Op. Mode 3							
Test case	Power value [dBm]						Limit	Result
	UARFCN no. 4132		UARFCN no. 4183		UARFCN no. 4233			
	PK	AV	PK	AV	PK	AV	[dBm]	
Release 99 12.2kbps RMC	26.87	23.86	27.23	23.87	26.91	23.76	38.4	Passed
Peak-to Average ratio [dB]	2.83		3.02		2.96		13	Passed

Remark: values within applicant's declared power range (tune-up range)

## 5.2. RF-Parameter - RF Peak power output radiated

### 5.2.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2			<input type="checkbox"/> Please see Chapter. 2.2.3	
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR		<input type="checkbox"/>	<input type="checkbox"/>
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40	<input type="checkbox"/> 620 ESU 26	<input type="checkbox"/>	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170	<input checked="" type="checkbox"/> 439 HL 562	<input checked="" type="checkbox"/> 549 HL025	
signalling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 546 CMU200			
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 378 RadiSense	
DC power	<input type="checkbox"/> 611 E3636A	<input checked="" type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 498 NGPE 40
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000			

### 5.2.2. Requirements and limits

<b>FCC</b>	§2.1046(a), §22.913(a)(2), § 24.232(c); §27.50(d)(4)
<b>IC</b>	RSS-132: 5.4 + SRSP 503: 5.1.3 for FDD Band 5 RSS-133:4.1/6.4 + SRSP-510:5.1.2 for FDD Band 2 RSS-139, Issue 3: Chapter 6.5 (SRSP-513) PAR PK-AV ≤ 13 dB
<b>Limits</b>	Maximum Power Output of the wireless device should be determined while measured radiated E(I)RP.
	Limit FDD Band 5: 7 Watt ERP (38.4 dBm)
	Limit FDD Band 2: 2 Watt EIRP (33.0 dBm)
	Limit FDD Band 4: 1 Watt EIRP (30.0 dBm)

### 5.2.3. Test condition and test set-up

link to test system (if used):		<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding		<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up		<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions		Temperature: (22±3°C)		Rel. humidity: (40±20)%
Test system set-up		Please see chapter "Test system set-up for radiated spurious emission measurements up to 20 GHz"		
Spectrum Analyzer Settings	<b>Parameter:</b>	Spectrum analyser mode 100 MHz 10 MHz 10 MHz Coupled repetitive Peak		
	Scan Mode Span RBW VBW Sweep time Sweep mode Detector			
Measurement method		<p>The measurements were performed by using the <b>substitution method</b> (ANSI/TIA/EIA 603C/D) with a spectrum-analyzer. This method can be described like follows:</p> <ol style="list-style-type: none"> <li>choosing of suitable spectrum-analyzer settings for performing the measurements. This settings of the spectrum analyzer must be maintained for both stages of the measurements: EUT emission measurements and also for measurements of the substituted level.</li> <li>The maximum level of the peak power was recorded, while the emissions were maximized by rotating the EUT in three orthogonal axes, which was situated on a non-conductive turntable of 1.55 m height (<math>P_{MEAS,1}</math>). This was performed for both measuring antenna polarisations (vertical/horizontal), the maximum of both values is used for further measurements and final substitution (<math>P_{MEAS,1,MAX}</math>).</li> <li>As the maximum emission is recorded, the EUT is replaced by a frequency dependant suitable antenna, which is connected to a RF-signal generator, which is transmitting on the determined worst-case frequency as determined in step 2.</li> <li>The RF-signal level of the signal generator is adjusted as long the same worst-case level determined first step is measured at the spectrum analyzer (<math>P_{SMHU}=P_{MEAS,1,MAX}</math>)</li> <li>Than the RF-signal cable is disconnected from the antenna and connected to a power-level meter. The level is determined (<math>P_{MEAS,2}</math>).</li> <li>The final result is calculated by adding the ERP/EIRP gain of the antenna which substitutes the EUT. <math>P_{EUT,SUBST} = P_{MEAS,2} + G_{ANTENNA}</math></li> </ol>		
EUT settings		<p>A call was established on highest power transmit conditions in RMC99 mode.</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.</p>		

**5.2.4. Results**

EUT				Set-up 2, Op.Mode 3				
Operating Mode	Channel			Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	No.	Nominal frequency [MHz]	PK	AV			
<b>FDD Band 5</b>	Low	4132	826.4	26.86	1.)	ERP-Value	V	passed
	Middle	4183	836.6	21.13				
	High	4233	846.6	20.26				

Remark: 1.) see conducted measurements for PAR factor

EUT				Set-up 2, Op.Mode 2				
Operating Mode	Channel			Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	No.	Nominal frequency [MHz]	PK	AV			
<b>FDD Band 4</b>	Low	1312	1712.4	25.30	1.)	EIRP-Value	H	passed
	Middle	1450	1740.0	25.64				
	High	1513	1752.6	24.76				

Remark: 1.) see conducted measurements for PAR factor

EUT				Set-up 2, Op.Mode 1				
Operating Mode	Channel			Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	No.	Nominal frequency [MHz]	PK	AV			
<b>FDD Band 2</b>	Low	9262	1852.4	26.82	1.)	EIRP-Value	H	passed
	Middle	9400	1880.0	25.97				
	High	9538	1907.6	25.61				

Remark: 1.) see conducted measurements for PAR factor

### 5.3. RF-Parameter - Occupied bandwidth and emission bandwidth

#### 5.3.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test site	<input type="checkbox"/> 347 Radio.lab. 1	<input checked="" type="checkbox"/> Radio.lab. 2			
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 489 ESU	<input type="checkbox"/> 264 FSEK	<input checked="" type="checkbox"/> 620 ESU26	
attenuator	<input checked="" type="checkbox"/> 530 10 dB	<input type="checkbox"/>	<input type="checkbox"/>		
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 547 CMU200		
DC Power	<input checked="" type="checkbox"/> 611 E3636A	<input type="checkbox"/> 087 EA3013	<input type="checkbox"/> 354 NGPE 40	<input type="checkbox"/> 086 LNG50-10	
otherwise	<input checked="" type="checkbox"/> 529 6dB divider	<input checked="" type="checkbox"/> 530 10dB			
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000		

#### 5.3.2. Requirements and Limits

<b>FCC</b>	CFR47, §2.202(a), §2.1049(h) <input checked="" type="checkbox"/> FDD-Band 5: §22.917(b) <input checked="" type="checkbox"/> FDD-Band 2: §24.238(b) <input checked="" type="checkbox"/> FDD-Band 4: §27.53(h)(3)	„the <b>occupied bandwidth</b> is the frequency bandwidth, such that, below it lower and above it upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated”
<b>IC</b>	<input checked="" type="checkbox"/> RSS-Gen, Issue 4: §6.6	
<b>ANSI</b>	C63.10-2013	

#### 5.3.3. Test condition and test set-up

Climatic conditions		Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up		Please see chapter “Test system set-up for conducted measurements at antenna port”	
Spectrum Analyzer Settings	Parameter	Occupied bandwidth:	Emission bandwidth
	Scan Mode Span RBW VBW Sweep time Sweep mode Detector	Spectrum analyser mode 6 MHz 50 kHz 300 kHz Coupled Repetitive, max-hold Peak	Spectrum analyser mode 6 MHz 50 kHz 300 kHz Coupled Repetitive, max-hold Peak
Measurement method		The used spectrum analyzer FSE or ESU from Rohde & Schwarz contains an integrated function to calculate the occupied bandwidth automatically. From left and right display margin, the upper and lower frequency points where the accumulated power becomes 0.5% of the total power, are calculated. Subtracting the previous determined two frequency points, yields the occupied bandwidth.	Bandwidth defined between 2 markers with are 26dBc compared to highest In-Band Peak Emission.
EUT settings		A call was established on highest power transmit conditions in RMC99 mode. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.	

**5.3.4. Results**

Operating band	Channel no.		Occupied 99% bandwidth [MHz]	26 dBc Emission bandwidth [MHz]
	Range	No.		
Set-up 1, Op-Mode 1				
<b>FDD Band 2</b>	Channel Low (1852.4 MHz)	9262	4.168269231	4.644230769
	Channel Middle (1880.0 MHz)	9400	4.168269231	4.634615385
	Channel High (1907.6 MHz)	9538	4.168269231	4.634615385
Set-up 1, Op-Mode2				
<b>FDD Band 4</b>	Channel Low (1712.4 MHz)	1312	4.168269231	4.644230769
	Channel Middle (1740.0 MHz)	1450	4.182692308	4.644230769
	Channel High (1752.6 MHz)	1512	4.168269231	4.644230769
Set-up 1, Op-Mode 3				
<b>FDD Band 5</b>	Channel Low (826.4 MHz)	4132	4.168269231	4.653846154
	Channel Middle (836.6 MHz)	4183	4.168269231	4.644230769
	Channel High (846.6 MHz)	4233	4.153846154	4.644230769

Remarks: see diagrams in separate annex 4

### 5.4. RF-Parameter - Conducted out of Band RF emissions and Band Edge

#### 5.4.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 347 Radio.lab. 1	<input checked="" type="checkbox"/> Radio.lab. 2	
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK <input type="checkbox"/> 620 ESU26
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 670 CMU
power supply	<input type="checkbox"/> 611 E3636A	<input checked="" type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50 <input type="checkbox"/> 268 EA- 3050 <input type="checkbox"/> 494 AG6632A <input type="checkbox"/> 498 NGPE 40
otherwise	<input checked="" type="checkbox"/> 529 6dB divider	<input checked="" type="checkbox"/> 530 10dB Att.	<input type="checkbox"/> 431 Near field
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000

#### 5.4.2. Requirements and limits

<b>FCC</b>	§2.1051 §2.1057 §22.917(a)(b) §24.238(a)(b) §27.53(h)
<b>IC</b>	RSS-132, Issue 3: 5.5(i)(ii) RSS-133, Issue 6: 6.5.1(i)(ii) RSS-139, Issue 3: 6.6(i)(ii)
<b>Limit</b>	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“

#### 5.4.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter “Test system set-up for conducted measurements on antenna port”	
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the Band-Edge where a AVERAGE detector applied.  A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)	
Spectrum-Analyzer settings	See below tables	
Mobile phone settings	A call was established on highest power transmit conditions in RMC99 mode.  The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.	

#### Spectrum-Analyzer settings for FDD Band 2

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	0.009	0.150	0.0001	-- <sup>1.)</sup>	10	25	MaxH-PK
Sweep 1 (subrange 2)	0.150	1	0.009	-- <sup>1.)</sup>	10	25	MaxH-PK
Sweep 1 (subrange 3)	1	30	0.1	-- <sup>1.)</sup>	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	19500	1	-- <sup>1.)</sup>	>60	35	MaxH-PK
Sweep 3a (Band-Edge)	1849	1850	0.05	-- <sup>1.)</sup>	30	35	MaxH-PK
Sweep 3b (Band-Edge)	1849	1850	0.05	-- <sup>1.)</sup>	30	35	MaxH-AV
Sweep 4a (Band-Edge)	1910	1911	0.05	-- <sup>1.)</sup>	30	35	MaxH-PK
Sweep 4b (Band-Edge)	1910	1911	0.05	-- <sup>1.)</sup>	30	35	MaxH-AV

Remark: 1.) EMI 6dB receiver mode used

### Spectrum-Analyzer Settings FDD Band 4

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	0.009	0.150	0.0001	-- <sup>1.)</sup>	10	25	MaxH-PK
Sweep 1 (subrange 2)	0.150	1	0.009	-- <sup>1.)</sup>	10	25	MaxH-PK
Sweep 1 (subrange 3)	1	30	0.1	-- <sup>1.)</sup>	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	18000	1	-- <sup>1.)</sup>	>60	35	MaxH-PK
Sweep 3a (Band-Edge)	1709	1710	0.05	-- <sup>1.)</sup>	30	35	MaxH-PK
Sweep 3b (Band-Edge)	1709	1710	0.05	-- <sup>1.)</sup>	30	35	MaxH-AV
Sweep 4a (Band-Edge)	1755	1756	0.05	-- <sup>1.)</sup>	30	35	MaxH-PK
Sweep 4b (Band-Edge)	1755	1756	0.05	-- <sup>1.)</sup>	30	35	MaxH-AV

Remark: 1.) EMI 6dB receiver mode used

### Spectrum-Analyzer Settings FDD Band 5

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	0.009	0.150	0.0001	-- <sup>1.)</sup>	10	25	MaxH-PK
Sweep 1 (subrange 2)	0.150	1	0.009	-- <sup>1.)</sup>	10	25	MaxH-PK
Sweep 1 (subrange 3)	1	30	0.1	-- <sup>1.)</sup>	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	9000	1	-- <sup>1.)</sup>	>60	35	MaxH-PK
Sweep 3a (Band-Edge)	823	824	0.05	-- <sup>1.)</sup>	30	35	MaxH-PK
Sweep 3b (Band-Edge)	823	824	0.05	-- <sup>1.)</sup>	30	35	MaxH-AV
Sweep 4a (Band-Edge)	850	851	0.05	-- <sup>1.)</sup>	30	35	MaxH-PK
Sweep 4b (Band-Edge)	850	851	0.05	-- <sup>1.)</sup>	30	35	MaxH-AV

Remark: 1.) EMI 6dB receiver mode used

## 5.4.4. Results

The results are presented below in summary form only. For more information please see each diagram enclosed in annex 4.

### 5.4.4.1. FDD Band 2: Op. Mode 1, Set-up 1

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.60	Low	9262	9kHz to 30MHz	1	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.61	Low		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
37.60	Low		1849 – 1850 MHz		Band-Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.62	Middle	9400	9kHz to 30MHz		--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.63	Middle		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.64	High		9kHz to 30MHz		--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.65	High	9538	30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
37.61	High		1910 – 1911 MHz		Band-Edge compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: --



**5.4.4.2. FDD Band 4: Op. Mode 2, Set-up 1**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.70	Low	1312	9kHz to 30MHz	2	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.71	Low		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
37.70	Low		1709 -1710 MHz		Band-Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.72	Middle	1450	9kHz to 30MHz		--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.73	Middle		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.74	High		9kHz to 30MHz		--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.75	High	1513	30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
37.71	High		1755 - 1756 MHz		Band-Edge compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: --

**5.4.4.3. FDD Band 5: Op. Mode 3, Set-up 1**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.40	Low	4132	9kHz to 30MHz	3	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.41	Low		30 MHz to 9GHz		Carrier visible on diagram, not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
37.40	Low		823 – 824 MHz		Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.42	Middle	4183	9kHz to 30MHz		--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.43	Middle		30 MHz to 9GHz		Carrier visible on diagram,	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.44	High	4233	9kHz to 30MHz		--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
36.45	High		30 MHz to 9GHz		Carrier visible on diagram,	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
37.41	High		849 – 850 MHz		Band-Edge compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: --

### 5.5. General Limit - Radiated field strength emissions below 30 MHz

#### 5.5.1. Test location and equipment

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)		<input type="checkbox"/> Please see Chapter. 2.2.2		<input type="checkbox"/> Please see Chapter. 2.2.3	
test site	<input checked="" type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.		<input type="checkbox"/>	<input type="checkbox"/>
receiver	<input type="checkbox"/> 377 ESCS30	<input checked="" type="checkbox"/> 001 ESS	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170	<input type="checkbox"/> 289 CBL 6141	<input checked="" type="checkbox"/> 030 HFH-Z2	<input type="checkbox"/> 477 GPS
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 371 CBT32	<input type="checkbox"/> 547 CMU	<input type="checkbox"/> 594 CMW		
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 378 RadiSense	
DC power	<input checked="" type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 498 NGPE 40
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 120 V 60 Hz via PAS 5000			

#### 5.5.2. Requirements

<b>FCC</b>	Part 15, Subpart C, §15.205 & §15.209			
<b>IC</b>	RSS-Gen., Issue 4: Chapter 8.9, Table 5			
<b>ANSI</b>	C63.10-2013			
Frequency [MHz]	Field strength limit		Distance [m]	Remarks
	[µV/m]	[dBµV/m]		
0.009 – 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used accord. ANSI C 63.10: 2013 due to measurement distance of 3 m
0.490 – 1.705	24000/f (kHz)	87.6 – 20Log(f) (kHz)	30	Correction factor used accord. ANSI C 63.10: 2013 due to measurement distance of 3 m
1.705 – 30	30	29.5	30	

#### 5.5.3. Test condition and test set-up

Signal link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%
EMI-Receiver or Analyzer Settings	Scan data	<input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz <input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz <input type="checkbox"/> other:	
	Scan-Mode Detector Mode: Sweep-Time	<input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyser Mode Peak (pre-measurement) and Quasi-PK/Average (final if applicable) Repetitive-Scan, max-hold Coupled – calibrated display if continuous signal otherwise adapted to EUT’s individual transmission duty-cycle	
General measurement procedures	Please see chapter “Test system set-up radiated magnetic field measurements below 30 MHz”		

#### 5.5.4. Measurement Results

The results are presented below in summary form only.

**Table of measurement results:**

Diagram No.	Carrier Channel		Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
2.16	Low	9262	9 kHz-30 MHz	3	1	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.10	Low	1312	9 kHz-30 MHz	3	2	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.13	Low	4132	9 kHz-30 MHz	3	3	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.17	Middle	9400	9 kHz-30 MHz	3	1	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.11	Middle	1450	9 kHz-30 MHz	3	2	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.06	Middle	4183	9 kHz-30 MHz	3	3	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.18	High	9538	9 kHz-30 MHz	3	1	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.12	High	1513	9 kHz-30 MHz	3	2	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.09	High	4233	9 kHz-30 MHz	3	3	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

**5.5.5. Correction factors due to reduced meas. distance (f< 30 MHz)**

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

Frequency Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15 209 [m]	1st Condition (d <sub>meas</sub> < D <sub>meas,ref</sub> )	2nd Condition (Limit distance bigger d <sub>meas,ref</sub> )	Distance Correction accord. Formula
kHz	9,00E+03	33333,33	5305,17	300	fulfilled	not fulfilled	-80,00
	1,00E+04	30000,00	4774,85		fulfilled	not fulfilled	-80,00
	2,00E+04	15000,00	2387,33		fulfilled	not fulfilled	-80,00
	3,00E+04	10000,00	1591,55		fulfilled	not fulfilled	-80,00
	4,00E+04	7500,00	1193,66		fulfilled	not fulfilled	-80,00
	5,00E+04	6000,00	954,93		fulfilled	not fulfilled	-80,00
	6,00E+04	5000,00	795,78		fulfilled	not fulfilled	-80,00
	7,00E+04	4285,71	682,09		fulfilled	not fulfilled	-80,00
	8,00E+04	3750,00	598,83		fulfilled	not fulfilled	-80,00
	9,00E+04	3333,33	530,52		fulfilled	not fulfilled	-80,00
	1,00E+05	3000,00	477,47		fulfilled	not fulfilled	-80,00
	1,25E+05	2400,00	381,97		fulfilled	not fulfilled	-80,00
	2,00E+05	1500,00	238,73		fulfilled	fulfilled	-78,02
	3,00E+05	1000,00	159,16		fulfilled	fulfilled	-74,49
	4,00E+05	750,00	119,37		fulfilled	fulfilled	-72,00
	4,90E+05	612,24	97,44		fulfilled	fulfilled	-70,23
	5,00E+05	600,00	95,49		fulfilled	not fulfilled	-40,00
	6,00E+05	500,00	79,58		fulfilled	not fulfilled	-40,00
	7,00E+05	428,57	68,21		fulfilled	not fulfilled	-40,00
8,00E+05	375,00	59,88	fulfilled	not fulfilled	-40,00		
9,00E+05	333,33	53,05	fulfilled	not fulfilled	-40,00		
MHz	1,00	300,00	47,75	30	fulfilled	not fulfilled	-40,00
	1,59	188,50	30,00		fulfilled	not fulfilled	-40,00
	2,00	150,00	23,87		fulfilled	fulfilled	-38,02
	3,00	100,00	15,92		fulfilled	fulfilled	-34,49
	4,00	75,00	11,94		fulfilled	fulfilled	-32,00
	5,00	60,00	9,55		fulfilled	fulfilled	-30,06
	6,00	50,00	7,96		fulfilled	fulfilled	-28,47
	7,00	42,86	6,82		fulfilled	fulfilled	-27,13
	8,00	37,50	5,97		fulfilled	fulfilled	-25,97
	9,00	33,33	5,31		fulfilled	fulfilled	-24,95
	10,00	30,00	4,77		fulfilled	fulfilled	-24,04
	10,60	28,30	4,50		fulfilled	fulfilled	-23,53
	11,00	27,27	4,34		fulfilled	fulfilled	-23,21
	12,00	25,00	3,96		fulfilled	fulfilled	-22,45
	13,56	22,12	3,52		fulfilled	fulfilled	-21,39
	15,00	20,00	3,18		fulfilled	fulfilled	-20,51
	15,92	18,85	3,00		fulfilled	fulfilled	-20,00
	17,00	17,65	2,91		not fulfilled	fulfilled	-20,00
	18,00	16,67	2,65		not fulfilled	fulfilled	-20,00
	20,00	15,00	2,39		not fulfilled	fulfilled	-20,00
	21,00	14,29	2,27		not fulfilled	fulfilled	-20,00
23,00	13,04	2,08	not fulfilled	fulfilled	-20,00		
25,00	12,00	1,91	not fulfilled	fulfilled	-20,00		
27,00	11,11	1,77	not fulfilled	fulfilled	-20,00		
29,00	10,34	1,65	not fulfilled	fulfilled	-20,00		
30,00	10,00	1,59	not fulfilled	fulfilled	-20,00		

## 5.6. RF-Parameter - Radiated out of Band RF emissions and Band Edge

### 5.6.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK
antenna	<input checked="" type="checkbox"/> 439 HL 562	<input checked="" type="checkbox"/> 549 HL 025	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55
signaling	<input type="checkbox"/> 392 MT8820A	<input checked="" type="checkbox"/> 546 CMU200	<input type="checkbox"/> 547 CMU
power supply	<input checked="" type="checkbox"/> 611 E3636A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input type="checkbox"/> 529 6dB divider	<input type="checkbox"/> 530 6dB Att.	<input type="checkbox"/> 110 USB LWL
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000

### 5.6.2. Requirements and limits

<b>FCC</b>	General: §2.1053(a) , §2.1057(a) <input checked="" type="checkbox"/> FDD Band 5: Part 22: §22.917(a)(b) <input checked="" type="checkbox"/> FDD Band 2: Part 24: §24.238(a)(b) <input checked="" type="checkbox"/> FDD Band 4: Part 27: §27.53(h)
<b>IC</b>	<input checked="" type="checkbox"/> FDD Band 5: RSS-132, Issue 3: 5.5(i)(ii) <input checked="" type="checkbox"/> FDD Band 2: RSS-133, Issue 6: 6.5.1(i)(ii) <input checked="" type="checkbox"/> FDD Band 4: RSS-139, Issue 3: 6.6 (i)(ii)
<b>Limit</b>	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“ -> Resulting limits for all power levels of the Mobile Phone: -13dBm

### 5.6.3. Test condition and test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%
Test system set-up	Please see chapter “Test system set-up for radiated spurious emission measurements up to 20 GHz”		
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the Band-Edge where a AVERAGE detector applied for critical measurements.		
EUT settings	A call was established on highest power transmit conditions in RMC99 mode. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.		

**Spectrum-Analyzer settings for FDD band 2**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	1	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	1	60	10	MaxH-PK
Sweep 2a (Band-Edge)	1849	1850	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1849	1850			30	35	MaxH-AV
Sweep 3a (Band-Edge)	1910	1911			30	35	MaxH-PK
Sweep 3b (Band-Edge)	1910	1911			30	35	MaxH-AV

**Spectrum-analyzer settings for FDD Band 4**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	10	160	10	MaxH-PK
Sweep 2a (Band-Edge)	1709	1710	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1709	1710			30	35	MaxH-AV
Sweep 3a (Band-Edge)	1755	1756			30	35	MaxH-PK
Sweep 3b (Band-Edge)	1755	1756			30	35	MaxH-AV

**Spectrum-analyzer settings for FDD Band 5**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	1	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	12000	1	1	160	10	MaxH-PK
Sweep 2a (Band-Edge)	823	824	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	823	824			30	35	MaxH-AV
Sweep 3a (Band-Edge)	850	851			30	35	MaxH-PK
Sweep 3b (Band-Edge)	850	851			30	35	MaxH-AV

### 5.6.4. Results

The results are presented below in summary form only. For more information please see each diagram enclosed in annex 4.

#### 5.6.4.1. FDD Band 2: Op. Mode 1

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Set-up	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
8.43	Low	9262	30 MHz to 12 GHz	1	2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.43a			12 to 18 GHz							
9.20	Low	1849 – 1850 MHz	2		Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
8.44	Middle	9400	30 MHz to 12 GHz		2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.44a			12 to 18 GHz							
8.45	High	9538	30 MHz to 20 GHz		2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.45a			12 to 18 GHz							
9.21	High	1910 – 1911 MHz	2		Band-Edge compliance:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	

Remark: no emission/harmonics detected

#### 5.6.4.2. FDD Band 4: Op. Mode 2

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Set-up	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
8.46	Low	1312	30 MHz to 12 GHz	2	2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.46a			12 to 18 GHz							
9.40	Low	1709 - 1710 MHz	2		Band Edge Compliance	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed	
8.47	Middle	1450	30 MHz to 12 GHz		2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.47a			12 to 18 GHz							
8.48	High	1513	30 MHz to 12 GHz		2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.48a			12 to 18 GHz							
9.41	High	1755 – 1756 MHz	2		Band-Edge compliance	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed	

Remark: no emission/harmonics detected

**5.6.4.3. FDD Band 5: Op. Mode 3**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Set-up	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
8.42	Low	4132	30 MHz to 12 GHz	3	2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.50	Low		823 – 824 MHz		3	Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.40	Middle	4183	30 MHz to 12 GHz		2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.41	High	4233	30 MHz to 12 GHz		2	Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.51	High		849 – 850 MHz		3	Band-Edge compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: no emission/harmonics detected

## 5.7. RF-Parameter - Frequency stability on temperature and voltage variations

### 5.7.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 347 Radio.lab.1	<input checked="" type="checkbox"/> Radio.lab.2	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 489 ESU 40	<input type="checkbox"/> 264 FSEK <input type="checkbox"/> 620 ESU 26
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 547 CMU200
DC power	<input type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50 <input type="checkbox"/> 268 EA- 3050 <input type="checkbox"/> 494 AG6632A <input type="checkbox"/> 498 NGPE 40
otherwise	<input checked="" type="checkbox"/> 529 6dB divider	<input checked="" type="checkbox"/> 613 20dB Att.	<input type="checkbox"/> 431 Near field
Climatic test chamber	<input checked="" type="checkbox"/> 331 HC 4055	<input checked="" type="checkbox"/> 627 OPUS 1	
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000

### 5.7.2. Requirements and limits

<b>FCC</b>	§2.1055(a)(1) <input checked="" type="checkbox"/> FDD Band 5: §22.355, Table C-1 <input checked="" type="checkbox"/> FDD Band 2: §24.235 <input checked="" type="checkbox"/> FDD Band 4: §27.54
<b>IC</b>	<input checked="" type="checkbox"/> FDD Band 5: RSS-132, Issue 3: 5.3 <input checked="" type="checkbox"/> FDD Band 2: RSS-133, Issue 6: 6.3 <input checked="" type="checkbox"/> FDD Band 4: RSS-139, Issue 3: 6.4
<b>Limit</b>	<i>"The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block"</i>

### 5.7.3. Test condition and test set-up

Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port"  In order to maintain the voltage constant over the time period of the tests, a dummy battery was connected to a laboratory power supply. The power supply voltage was controlled on the input of the power supply terminals of the EUT.
Measurement method	The RF Channel spacing is 200 kHz according W-CDMA-Spec, with a guard band. The aim of the EUT is to function under all extreme conditions within authorized sub-bands in regard to temperature and voltage variations. The frequency deviation was recorded with base station's build in capability. (CMU)  As the standard requires that the fundamental emissions stays within the authorized band, a limit of 0.1ppm is considered low enough to ensure this.
Mobile phone settings	A call was established on highest power transmit conditions in RMC99 mode.  The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.  Tests have been done in Rel99, 12.2 kbps RMC operating mode.

#### 5.7.3.1. Frequency shift of carrier against a voltage range at constant nominal temperature of 20° Celsius


- 1.) determine the carrier frequency for the lowest and highest channel at room temperature and nominal voltage [20°C]
- 2.) The voltage was reduced in 0.1 Volt steps to the lower end point, where the mobile phone stops working. (this shall be specified by the manufacturer) Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self heating effects.
- 3.) The voltage was increased in 0.1 Volt steps to the upper declared voltage of the battery. Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self heating effects.



5.7.4. Measurement Results


5.7.4.1. FDD Band 2

FDD Band 2 - Channel 9400				
Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,50	1,88E+09	-39	-0,021	passed
3,60		-38	-0,020	
3,70		-44	-0,023	
3,80		-41	-0,022	
3,90		46	0,024	
4,00		-44	-0,023	
4,10		-43	-0,023	
4,20		-45	-0,024	

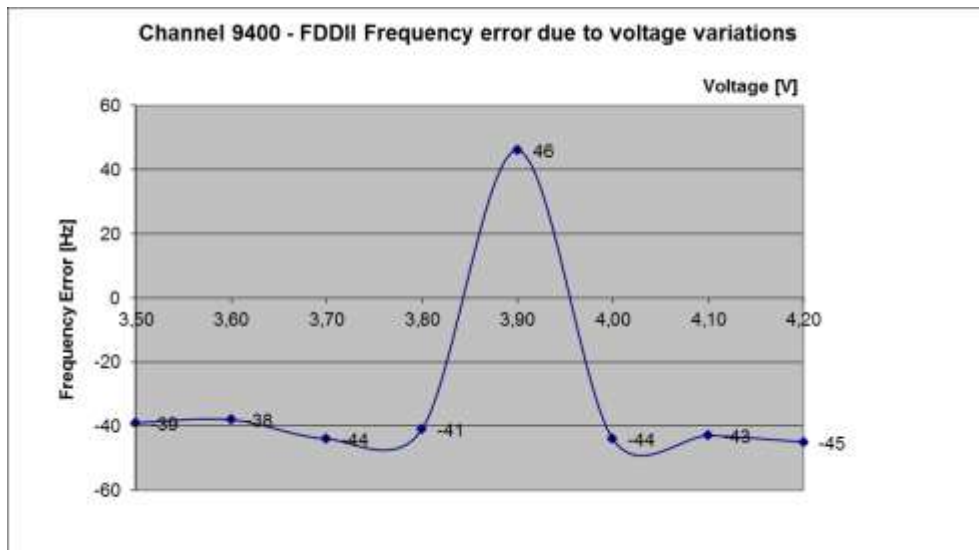


5.7.4.2. FDD Band 4

FDD Band 4 - Channel 1450				
Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,50	8,37E+08	-49	-0,059	passed
3,60		-46	-0,055	
3,70		-49	-0,059	
3,80		-41	-0,049	
3,90		-51	-0,061	
4,00		-53	-0,063	
4,10		-59	-0,071	
4,20		-44	-0,053	

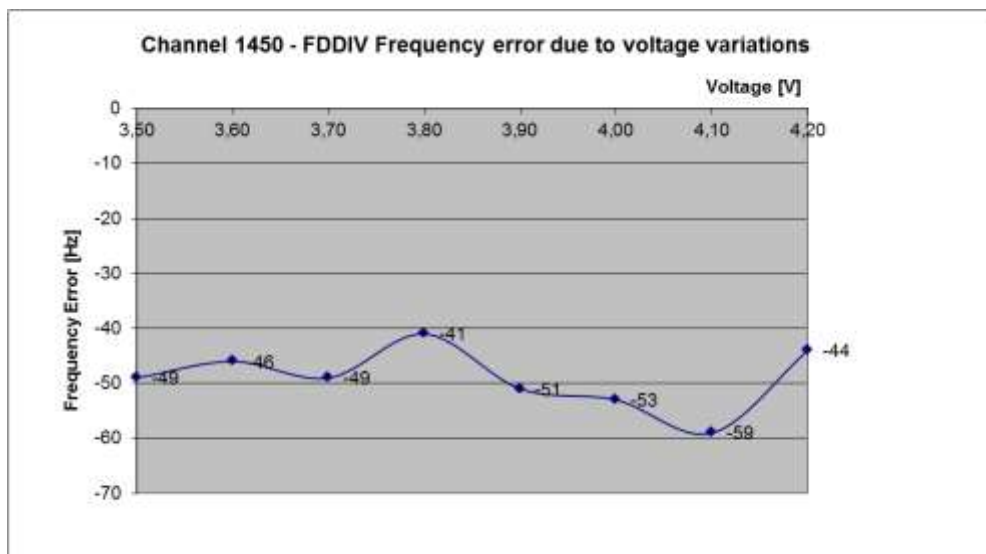

5.7.4.3. FDD Band 5

FDD Band V - Channel 4183				
Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,50	8,37E+08	36	0,043	passed
3,60		30	0,036	
3,70		32	0,038	
3,80		35	0,042	
3,90		39	0,047	
4,00		32	0,038	
4,10		39	0,047	
4,20		33	0,039	

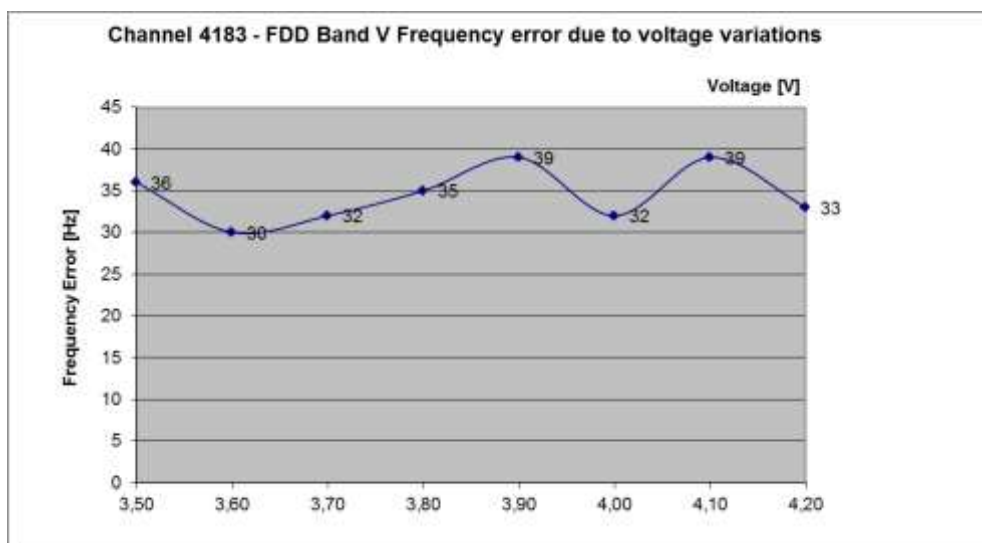


**5.7.4.4. Frequency shift of carrier against temperature at constant power supply voltage**

- 1.) determine the carrier frequency for the lowest, middle and highest channel at room temperature and nominal voltage [20°C]
- 2.) expose the mobile station to -30°C, wait sufficient time to have constant temperature.
- 3.) Perform the carrier frequencies measurements in 10°C increments from -30°C to +50°C. For about one hour at the specified temperature the mobile was powered-off. After powering-on, the measurements were made within 2 minutes to prevent self-warming of the mobile.


**5.7.4.5. FDD Band 2**

Temperature	Maximum frequency error						Verdict Limit=±0.1ppm
	Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538	
	[Hz]			[ppm]			
-30	-15	-11	9	-0.008	-0.006	0.005	Passed
-20	-19	-9	9	-0.010	-0.005	0.005	
-10	-19	-12	7	-0.010	-0.006	0.004	
0	-16	-12	-6	-0.009	-0.006	-0.003	
10	-17	-13	-9	-0.009	-0.007	-0.005	
20	-11	-11	-16	-0.006	-0.006	-0.008	
30	-8	-11	-15	-0.004	-0.006	-0.008	
40	-10	-11	-15	-0.005	-0.006	-0.008	
50	-7	-13	-14	-0.004	-0.007	-0.007	

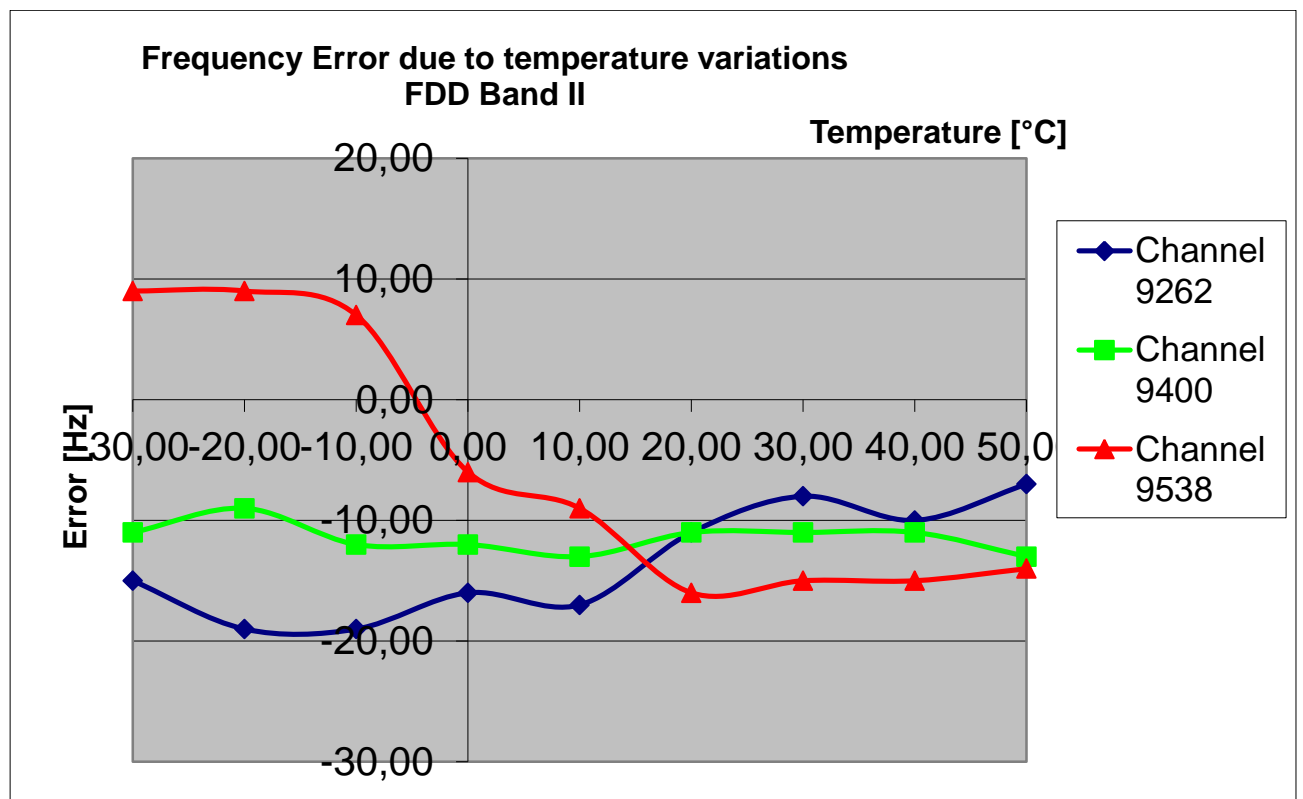


5.7.4.6. FDD Band 4

Temperature	Maximum frequency error						Verdict Limit=±0.1 ppm
	Channel 1312	Channel 1450	Channel 1513	Channel 4132	Channel 4183	Channel 4233	
	[Hz]			[ppm]			
-30	-18	10	19	-0.022	0.012	0.022	Passed
-20	-30	17	25	-0.036	0.020	0.030	
-10	-30	10	26	-0.036	0.012	0.031	
0	-26	9	22	-0.031	0.011	0.026	
10	-21	5	10	-0.025	0.006	0.012	
20	-9	-13	-21	-0.011	-0.016	-0.025	
30	12	-14	-16	0.015	-0.017	-0.019	
40	14	-13	-22	0.017	-0.016	-0.026	
50	15	-15	-23	0.018	-0.018	-0.027	

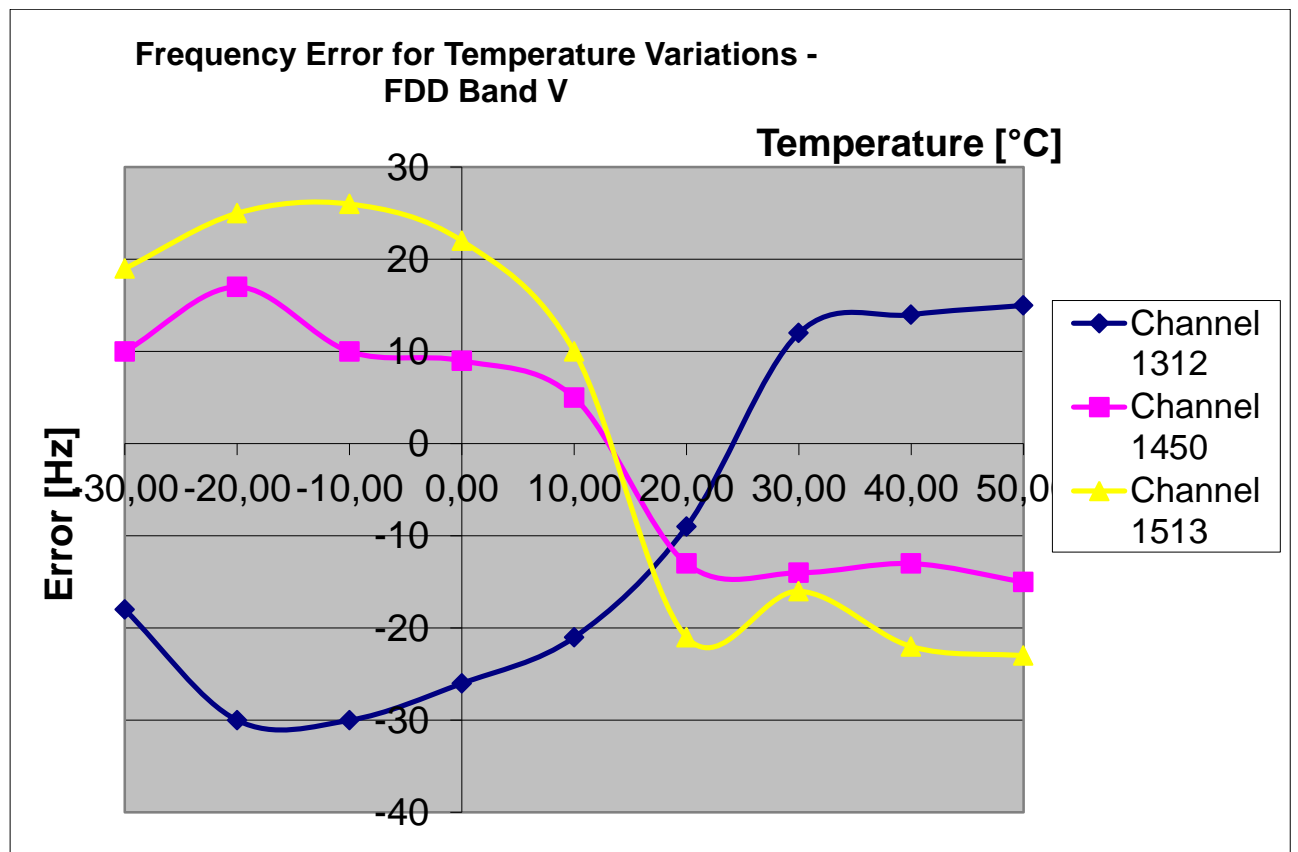

5.7.4.7. FDD Band 5

Temperature	Maximum frequency error						Verdict Limit=±0.1ppm
	Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233	
	[Hz]			[ppm]			
-30	6	5	7	0.007	0.006	0.008	Passed
-20	-6	4	7	-0.007	0.005	0.008	
-10	-6	-4	9	-0.007	-0.005	0.011	
0	-6	7	7	-0.007	0.008	0.008	
10	-6	-4	6	-0.007	-0.005	0.007	
20	5	4	-5	0.006	0.005	-0.006	
30	6	-4	-5	0.007	-0.005	-0.006	
40	6	-4	-5	0.007	-0.005	-0.006	
50	6	4	-5	0.007	0.005	-0.006	

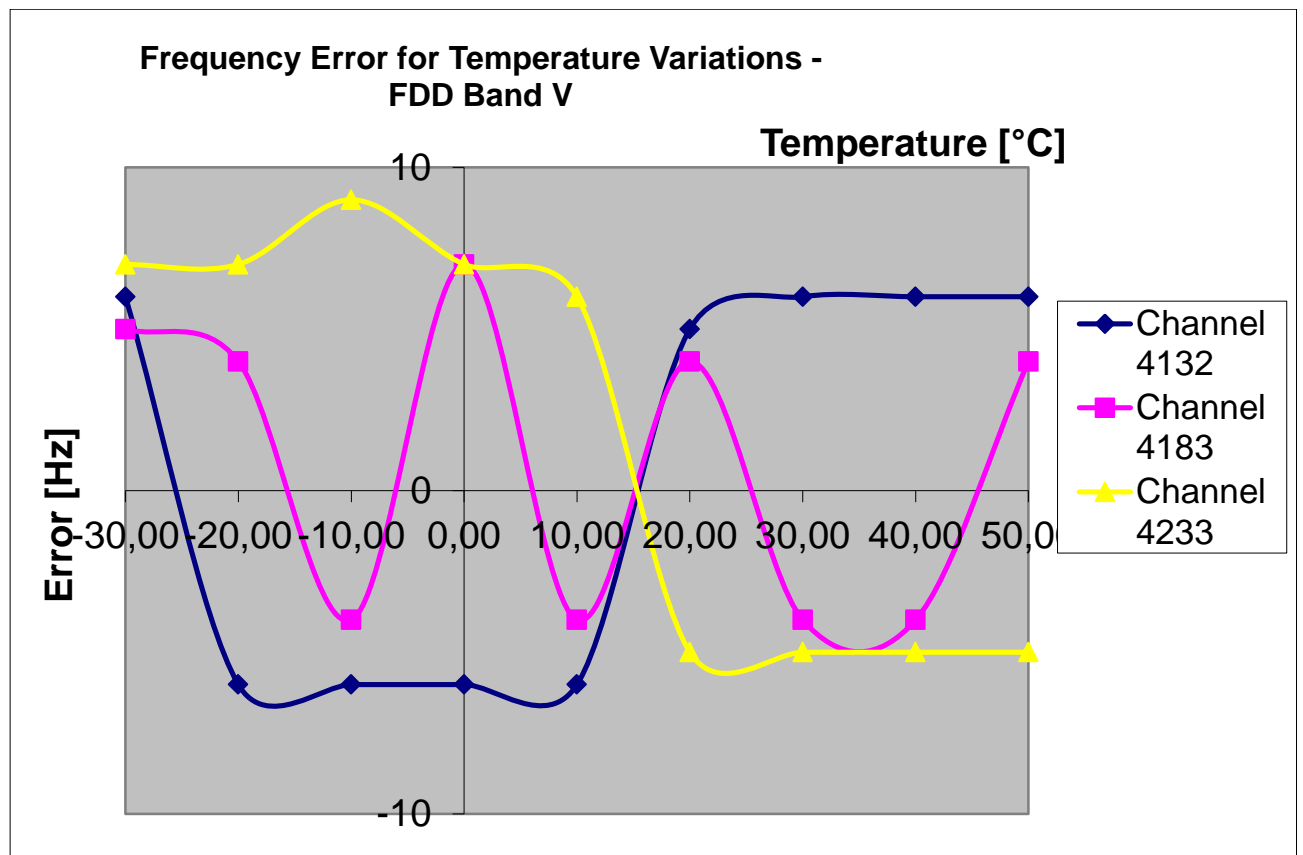

### 5.8. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%						Remarks
Conducted emissions ( $U_{CISPR}$ )	CISPR 16-2-1	9 kHz - 150 kHz	4.0 dB						-
		150 kHz - 30 MHz	3.6 dB						
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz	4.2 dB						E-Field
		1 GHz - 18 GHz	5.1 dB						
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-						-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2		
		9 kHz - 12.75 GHz	N/A	0.60	--	--	--		-
		12.75 - 26.5GHz	N/A	0.82	--	--	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	--	--	--		N/A - not applicable
		2.8 GHz - 12.75GHz	1.48	N/A	--	--	--		
		12.75 GHz - 18GHz	1.81	N/A	--	--	--		
		18 GHz - 26.5GHz	1.83	N/A	--	--	--		
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			1.0 dB						Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			See above: 0.70 dB						Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB						Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB						
		1 GHz - 20 GHz	3.17 dB						

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

## 7. Accreditation details of CETECOM's laboratories and test sites

Ref.- No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkKS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	(MRA US-EU 0003)	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room



## 8. Instruments and Ancillary

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

### 8.0.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
264	Spectrum Analyzer	FSEK 30	826939/005	Bios=2.1, Analyzer= 3.20
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	TSI 1.53
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr. 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)

### 8.0.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	30.04.2016
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	30.04.2016
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	30.04.2016
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	30.04.2017
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	31.03.2016
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.03.2017
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.04.2018
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	30.04.2018
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	30.04.2017
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	30.09.2015
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
090	Helmholtz coil: 2x10 coils in series	Helmholtz coil: 2x10 coils in	-	RWTÜV	24 M	4	31.03.2016
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.04.2018
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.04.2018
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	31.03.2016
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	30.04.2018
140	Signal Generator	SMHU	831314/006	Rohde & Schwarz	24 M	-	31.03.2016
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	31.03.2016
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	31.03.2016
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	31.03.2016
264	Spectrum Analyzer	FSEK 30	826939/005	Rohde & Schwarz	12 M	-	30.04.2016
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	31.03.2016
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	31.03.2016
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.09.2015
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.09.2015
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	30.04.2016
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	31.03.2017
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	31.03.2017
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.12.2016
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	31.03.2016
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	30.04.2017
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
355	Power Meter	URV 5	891310/027	Rohde & Schwarz	24 M	-	31.03.2016
356	power sensor	NRV-Z1	882322/014	Rohde & Schwarz	24 M	-	31.03.2015
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	30.04.2017
371	Bluetooth Tester	CBT32	100153	R&S	24 M	-	31.03.2016
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	24 M	-	30.04.2017
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	30.04.2016
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	30.04.2017
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	30.04.2016
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	30.04.2016
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	31.03.2017
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR) Cable	-	CETECOM	12 M	5	30.01.2016
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	30.09.2015
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	30.09.2015

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	30.09.2015
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	30.04.2016
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	31.03.2016
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.04.2018
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2018
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	30.04.2017
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	30.09.2015
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	31.07.2017
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	30.04.2016
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	30.09.2015
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	30.04.2017
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.04.2016
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	30.04.2016
548	Digital-Barometer	GBP 2300	without	Greisinger GmbH	-	-	
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36 M	-	31.07.2018
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	30.09.2015
557	System CTC-OTA-2	R&S TS8991	-	Rohde & Schwarz	12 M	5	30.09.2015
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	30.09.2015
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2016
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	12 M	-	30.04.2016
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	36 M	-	31.03.2016
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Rohde & Schwarz	24 M	-	30.04.2017
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	30.04.2017
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	30.04.2017
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	31.03.2016
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	01.12.2015
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.4 3	G. Lufft GmbH	24 M	-	30.04.2017
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
636	Thermal Imaging camera	Ti32	Ti32-12060213	Fluke Corporation	36 M	-	31.07.2015
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	KogiLink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	12 M	-	30.04.2016
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	31.03.2016
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	30.04.2016
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test Solutions	24 M	-	30.04.2017
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	30.04.2016
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	24 M	-	31.03.2016
693	TS8997	CTC-Radio Lab 1_TS8997	-	Rohde&Schwarz	12 M	5	01.05.2015
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due

### 8.0.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No . 443)
	1d	System CTC-SAR-EMI (Ref.-No . 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No . 420)
	1 g	System CTC-FAR-EMS (Ref.-No . 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

## 9. Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2015-06-28
C1	Inclusion of CCDF results	2015-08-01