





Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1273.000000	48.00	---	68.20	20.20	200.0	V	133.0	-8
1404.833333	---	39.12	54.00	14.88	100.0	H	354.0	-7
1440.533333	---	43.56	54.00	10.44	200.0	V	0.0	-7
1945.933333	50.27	---	68.20	17.93	200.0	V	214.0	-5
2634.266667	51.35	---	68.20	16.85	100.0	H	358.0	-4
2740.900000	---	42.15	54.00	11.85	100.0	V	16.0	-4
3581.366667	51.66	---	68.20	16.54	100.0	V	91.0	-3
3999.500000	---	42.85	54.00	11.15	200.0	H	64.0	-1
5193.700000	54.97	---	68.20	13.23	200.0	V	334.0	2
5362.400000	---	45.37	54.00	8.63	100.0	V	37.0	3
7625.966667	---	47.33	54.00	6.67	100.0	V	350.0	7
7778.800000	58.88	---	68.20	9.32	200.0	H	50.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11a CH140

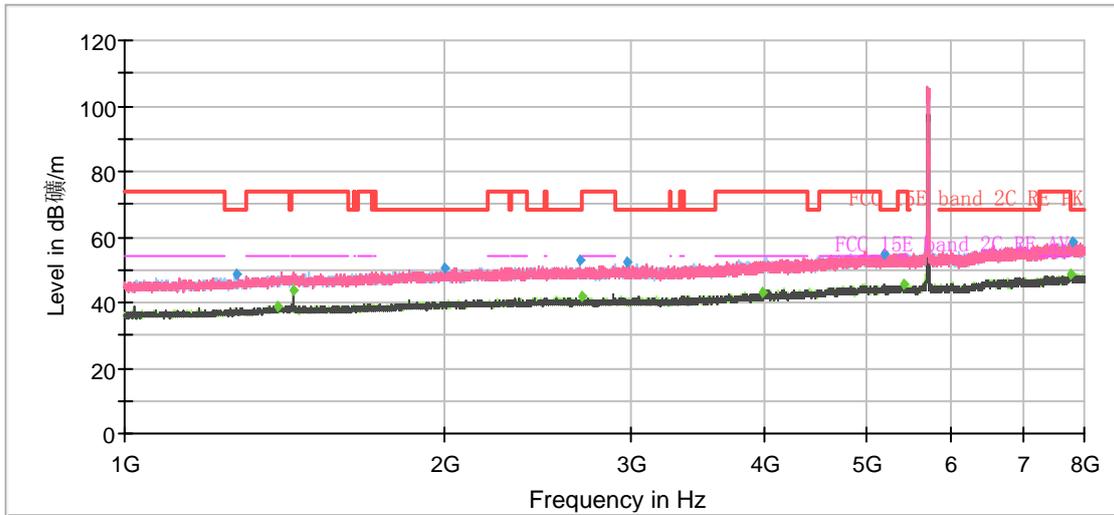

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

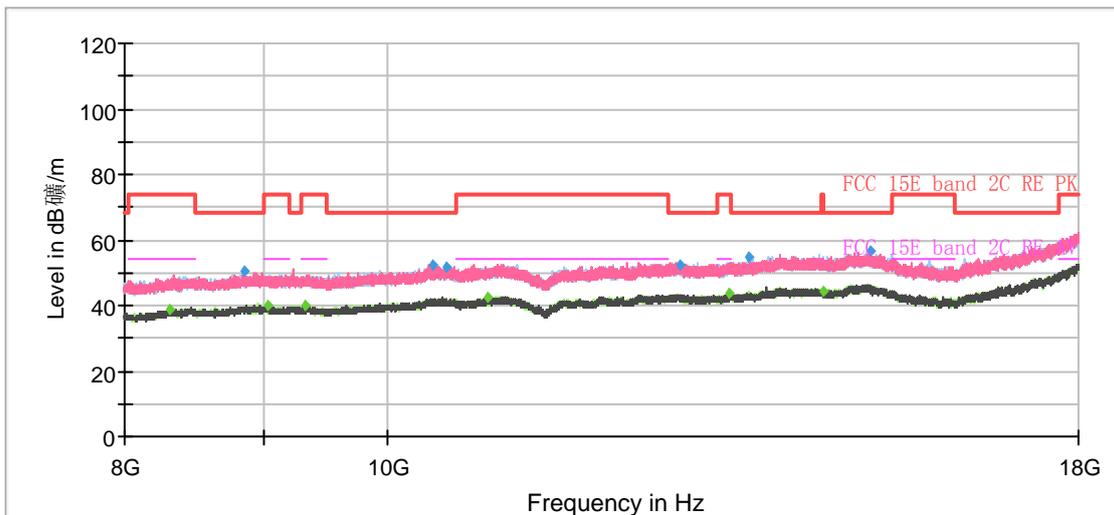


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1272.066667	48.57	---	68.20	19.63	100.0	H	348.0	-8
1395.266667	---	38.79	54.00	15.21	200.0	V	311.0	-7
1440.533333	---	43.60	54.00	10.40	200.0	V	0.0	-7
1997.266667	50.19	---	68.20	18.01	200.0	H	5.0	-5
2676.966667	52.90	---	68.20	15.30	100.0	H	294.0	-3
2692.833333	---	41.64	54.00	12.36	100.0	V	66.0	-4
2970.266667	52.35	---	68.20	15.85	200.0	V	0.0	-3
3979.666667	---	43.02	54.00	10.98	200.0	V	2.0	-1
5184.133333	54.63	---	68.20	13.57	100.0	V	79.0	2
5414.666667	---	45.62	54.00	8.38	100.0	H	320.0	3
7749.633333	---	47.62	54.00	6.38	100.0	V	6.0	7
7787.200000	58.70	---	68.20	9.50	200.0	V	0.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11a CH149

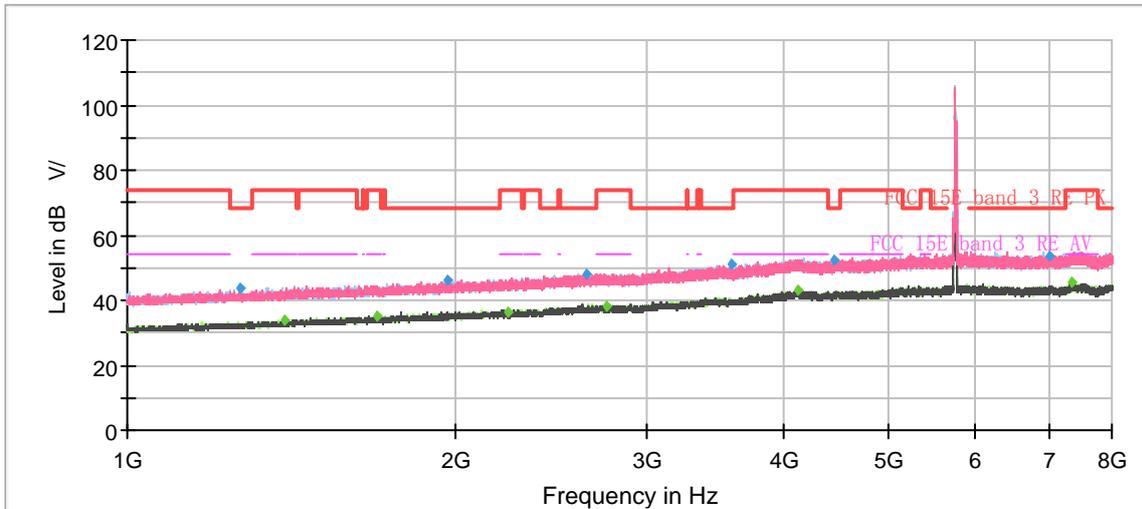

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

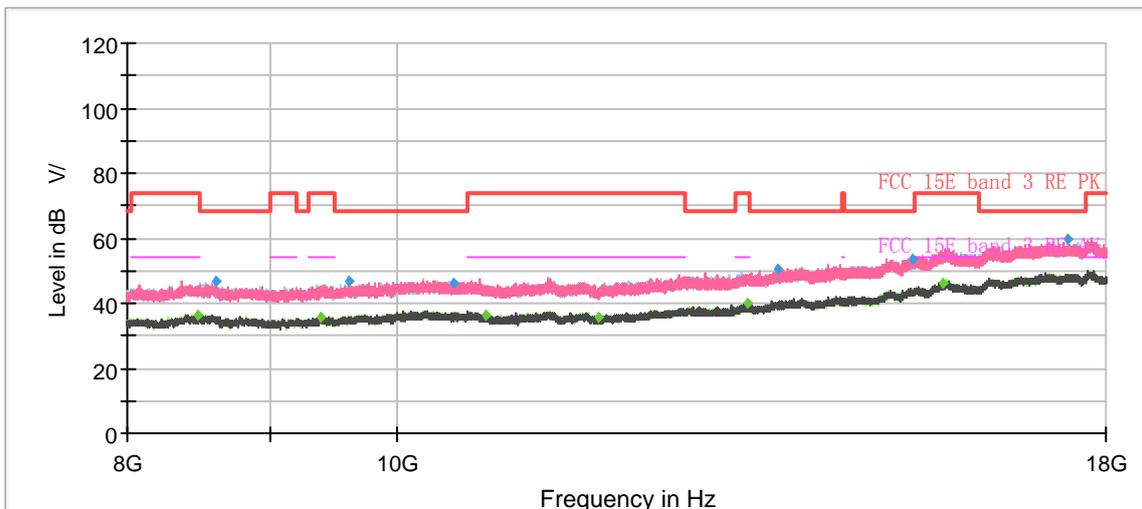


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1269.266667	43.74	---	68.20	24.46	100.0	H	17.0	-7
1395.966667	---	33.87	54.00	20.13	100.0	H	236.0	-6
1696.733333	---	35.08	54.00	18.92	100.0	H	1.0	-5
1964.366667	45.85	---	68.20	22.35	100.0	V	25.0	-3
2233.866667	---	36.48	54.00	17.52	200.0	H	28.0	-2
2635.666667	48.19	---	68.20	20.01	200.0	V	17.0	0
2745.800000	---	38.44	54.00	15.56	100.0	H	59.0	1
3574.366667	50.93	---	68.20	17.27	100.0	V	142.0	4
4113.600000	---	42.85	54.00	11.15	100.0	H	12.0	7
4449.133333	52.52	---	68.20	15.68	200.0	V	223.0	7
7006.233333	53.40	---	68.20	14.80	100.0	H	236.0	11
7349.700000	---	45.24	54.00	8.76	100.0	V	11.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

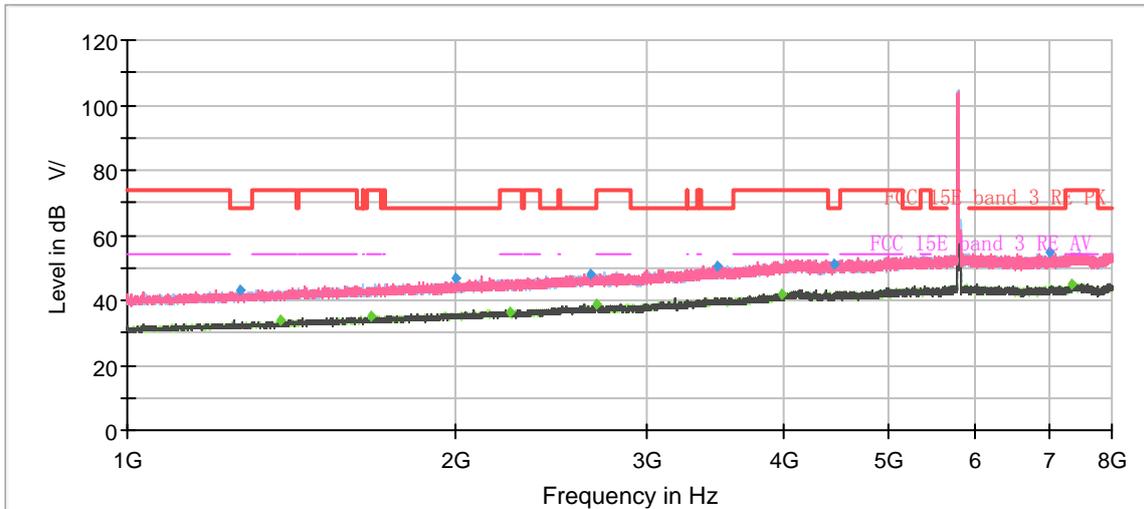

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

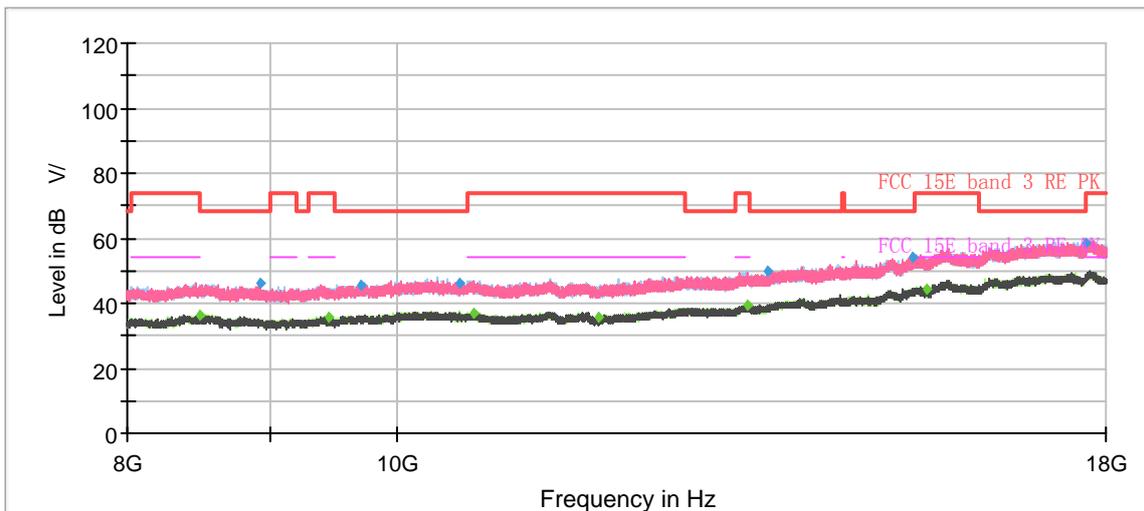


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1270.433333	43.04	---	68.20	25.16	200.0	V	282.0	-8
1380.333333	---	33.91	54.00	20.09	100.0	H	96.0	-7
1674.333333	---	35.05	54.00	18.95	100.0	H	7.0	-6
1997.500000	46.63	---	68.20	21.57	200.0	H	108.0	-5
2239.700000	---	36.55	54.00	17.45	200.0	H	166.0	-3
2662.733333	48.12	---	68.20	20.08	100.0	V	186.0	0
2694.466667	---	38.54	54.00	15.46	100.0	V	51.0	1
3483.600000	50.57	---	68.20	17.63	200.0	H	272.0	4
3991.333333	---	41.84	54.00	12.16	200.0	H	130.0	6
4448.200000	51.24	---	68.20	16.96	100.0	H	313.0	7
7012.533333	54.78	---	68.20	13.42	100.0	V	301.0	11
7352.266667	---	45.13	54.00	8.87	100.0	H	0.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11a CH165

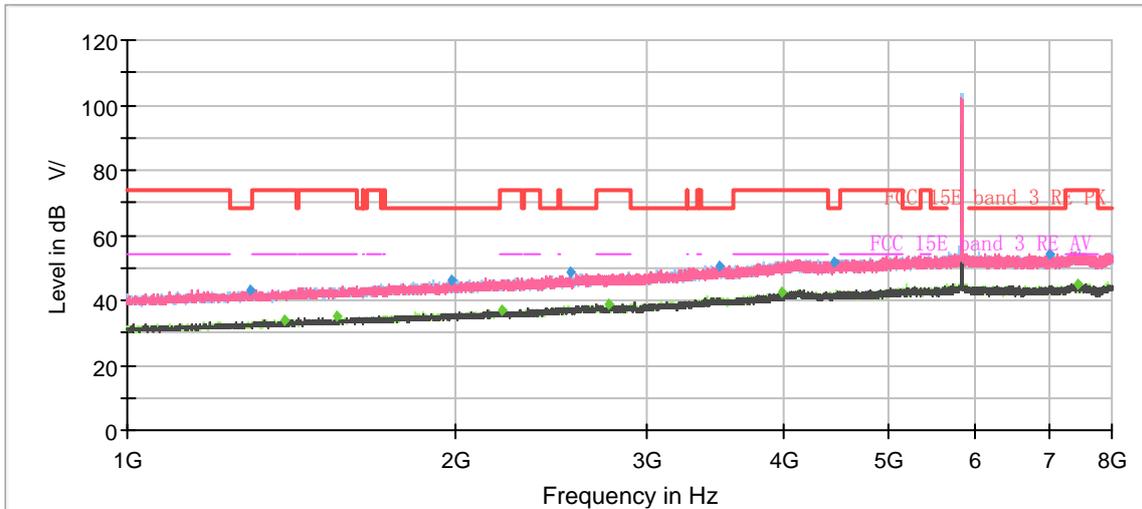

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

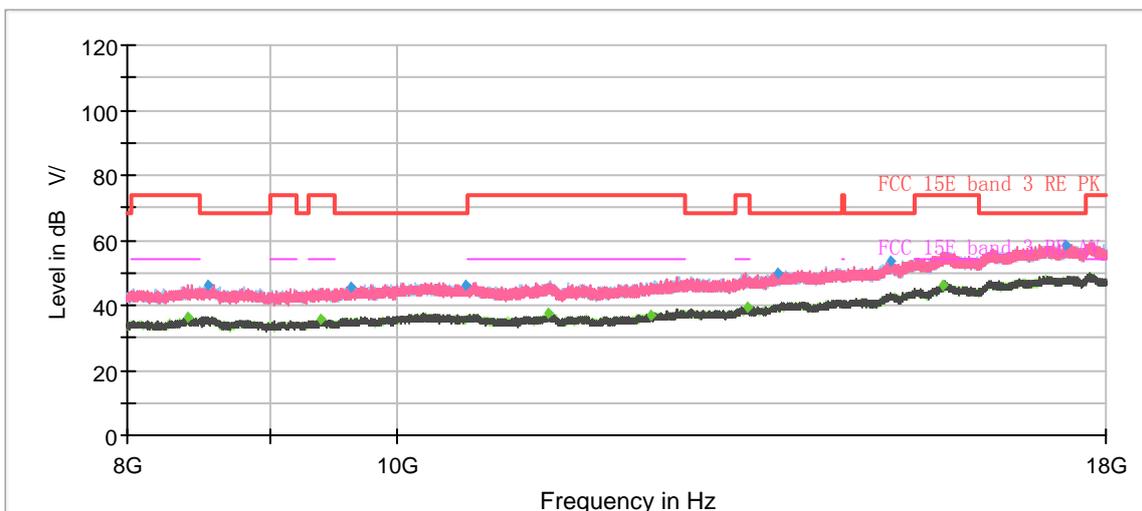


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1296.100000	43.00	---	68.20	25.20	200.0	H	189.0	-7
1392.000000	---	34.00	54.00	20.00	100.0	V	75.0	-6
1557.433333	---	35.26	54.00	18.74	100.0	V	6.0	-5
1986.300000	46.13	---	68.20	22.07	100.0	V	150.0	-3
2205.866667	---	36.87	54.00	17.13	200.0	H	14.0	-2
2550.266667	48.54	---	68.20	19.66	200.0	V	291.0	0
2765.400000	---	38.75	54.00	15.25	200.0	H	68.0	1
3497.600000	50.36	---	68.20	17.84	200.0	V	318.0	4
3980.366667	---	42.35	54.00	11.65	200.0	H	103.0	6
4456.366667	51.89	---	68.20	16.31	100.0	H	241.0	7
7009.500000	54.25	---	68.20	13.95	200.0	H	244.0	11
7450.033333	---	44.93	54.00	9.07	200.0	V	332.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH36

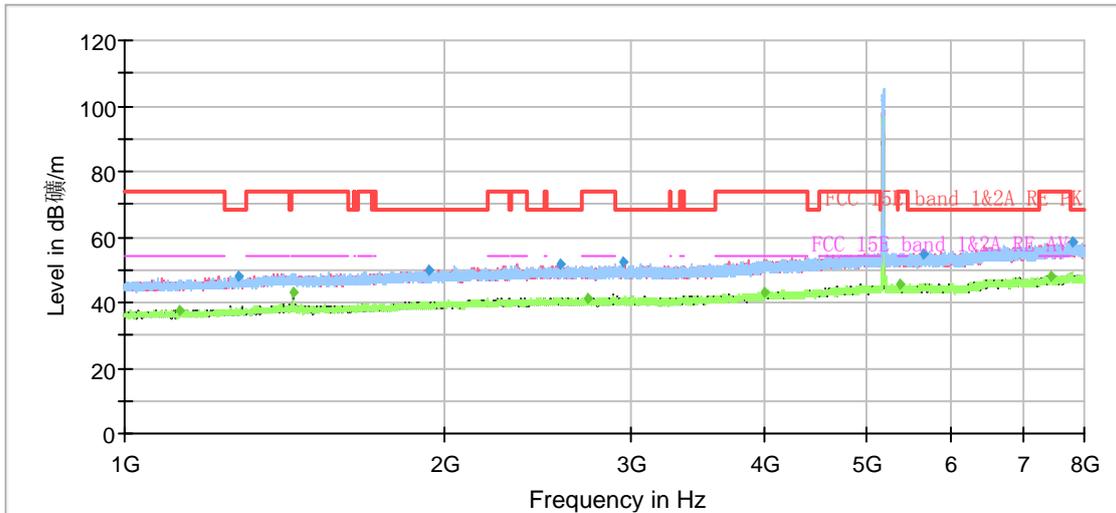

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

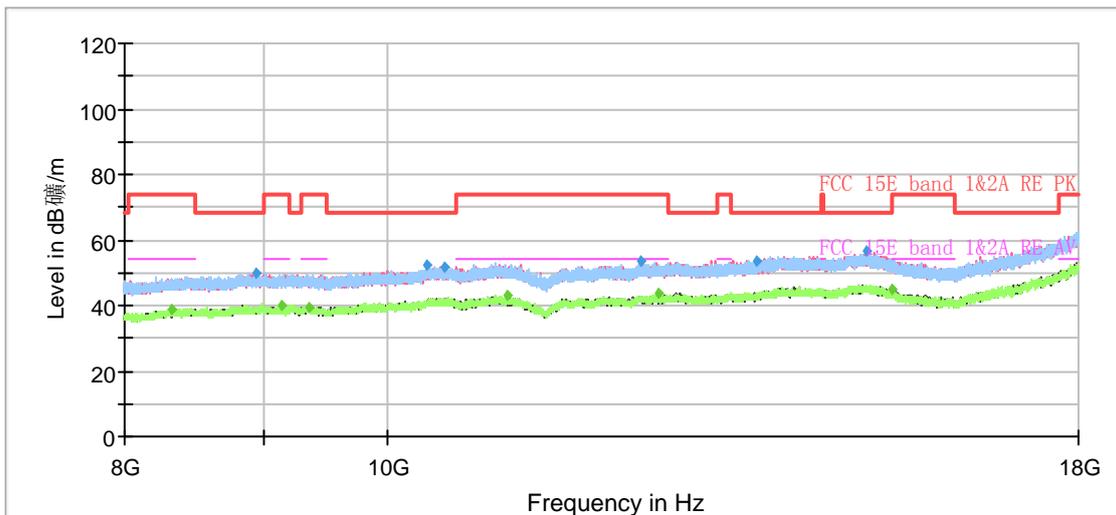

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1127.166667	---	37.72	54.00	16.28	100.0	V	326.0	-9
1277.666667	48.22	---	68.20	19.98	200.0	H	328.0	-8
1440.533333	---	42.81	54.00	11.19	200.0	V	350.0	-7
1934.266667	50.09	---	68.20	18.11	200.0	H	94.0	-5
2569.400000	51.73	---	68.20	16.47	200.0	H	0.0	-4
2726.200000	---	41.54	54.00	12.46	100.0	H	5.0	-4
2944.833333	52.22	---	68.20	15.98	200.0	H	108.0	-3
3999.266667	---	42.85	54.00	11.15	100.0	V	336.0	-1
5368.466667	---	45.60	54.00	8.40	100.0	H	0.0	3
5641.466667	54.90	---	68.20	13.30	200.0	H	94.0	3
7426.466667	---	47.82	54.00	6.18	200.0	V	6.0	7
7786.266667	58.49	---	68.20	9.71	100.0	H	278.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




### 802.11n (HT20) CH40

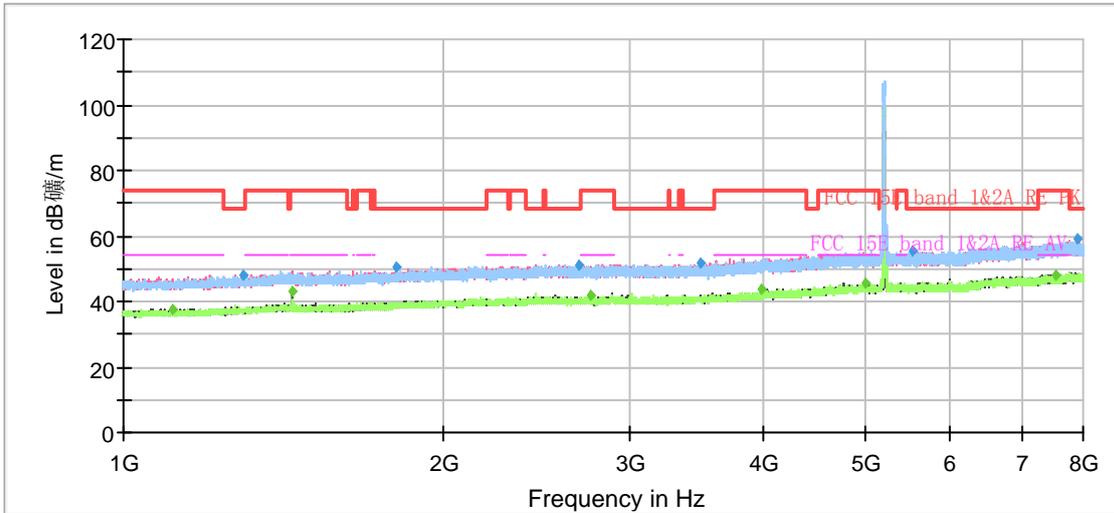

N

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

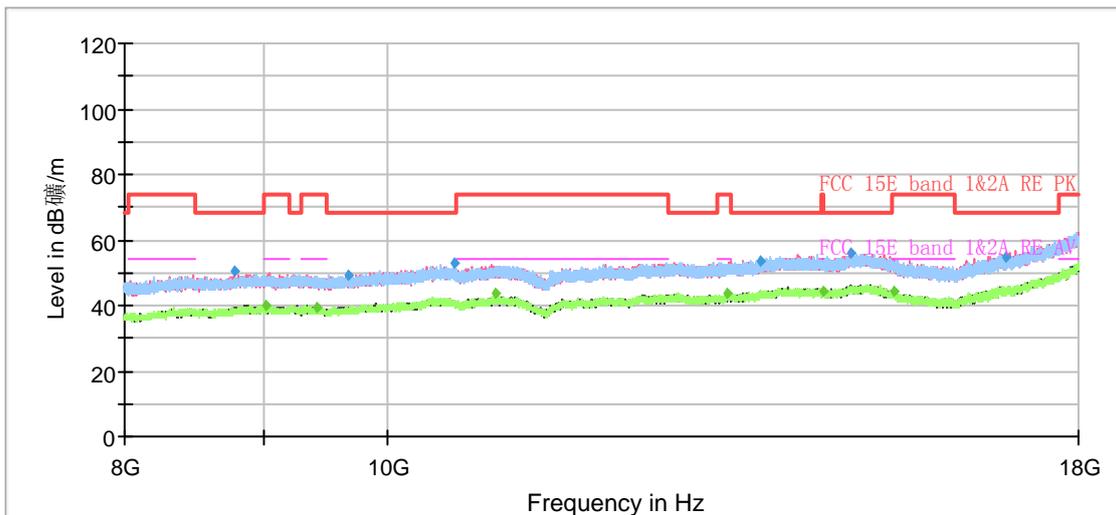


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1110.600000	---	37.33	54.00	16.67	100.0	V	334.0	-9
1294.000000	48.01	---	68.20	20.19	200.0	H	177.0	-8
1440.766667	---	42.78	54.00	11.22	200.0	V	0.0	-7
1807.100000	50.26	---	68.20	17.94	200.0	V	125.0	-6
2687.700000	51.11	---	68.20	17.09	100.0	V	271.0	-4
2753.500000	---	41.76	54.00	12.24	200.0	H	321.0	-4
3493.633333	51.52	---	68.20	16.68	200.0	H	24.0	-3
3982.466667	---	43.49	54.00	10.51	100.0	V	82.0	-1
4984.633333	---	45.79	54.00	8.21	200.0	V	33.0	2
5518.266667	55.67	---	68.20	12.53	100.0	H	278.0	3
7535.433333	---	47.74	54.00	6.26	100.0	H	97.0	7
7904.800000	58.94	---	68.20	9.26	100.0	V	24.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH48

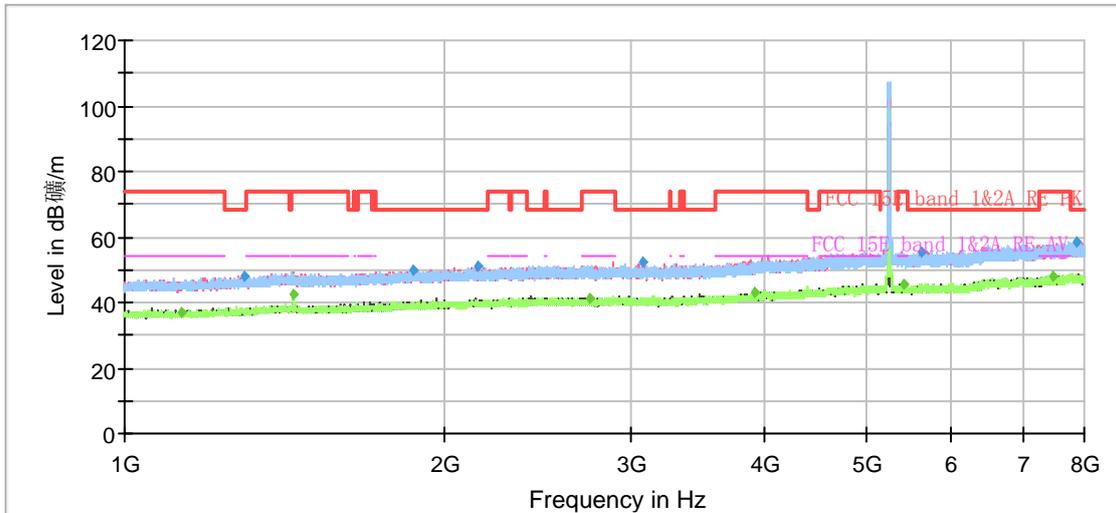

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

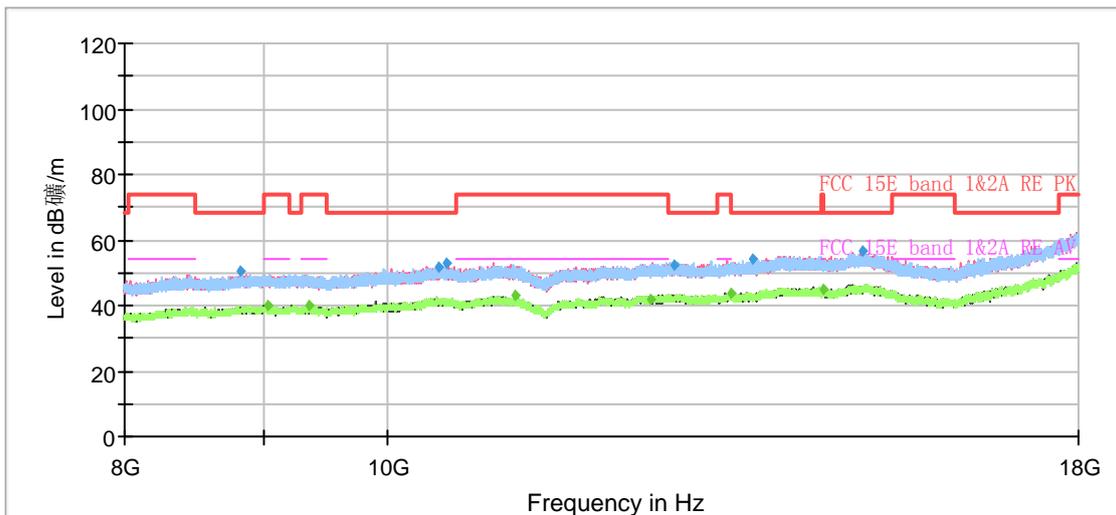


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1130.666667	---	37.15	54.00	16.85	200.0	V	89.0	-9
1297.266667	48.20	---	68.20	20.00	200.0	V	196.0	-8
1440.533333	---	42.76	54.00	11.24	200.0	V	10.0	-7
1871.033333	49.77	---	68.20	18.43	200.0	V	6.0	-5
2146.366667	51.24	---	68.20	16.96	200.0	V	49.0	-5
2743.466667	---	41.45	54.00	12.55	200.0	V	265.0	-4
3069.666667	52.26	---	68.20	15.94	100.0	H	0.0	-3
3921.566667	---	42.98	54.00	11.02	100.0	V	350.0	-2
5417.700000	---	45.78	54.00	8.22	100.0	V	124.0	3
5611.366667	55.21	---	68.20	12.99	100.0	V	110.0	3
7460.533333	---	47.90	54.00	6.10	100.0	V	285.0	7
7876.800000	58.42	---	68.20	9.78	200.0	V	24.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH52

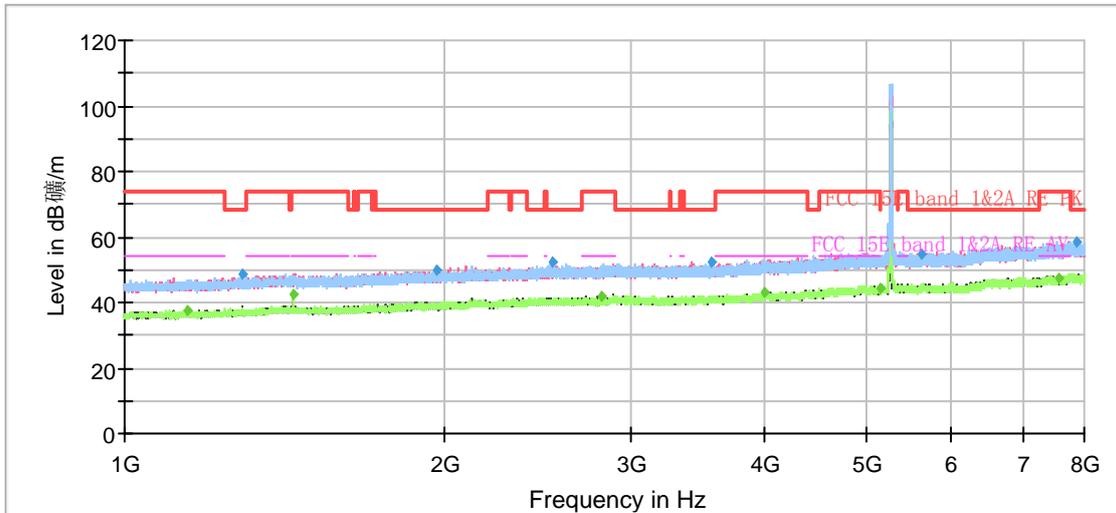

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

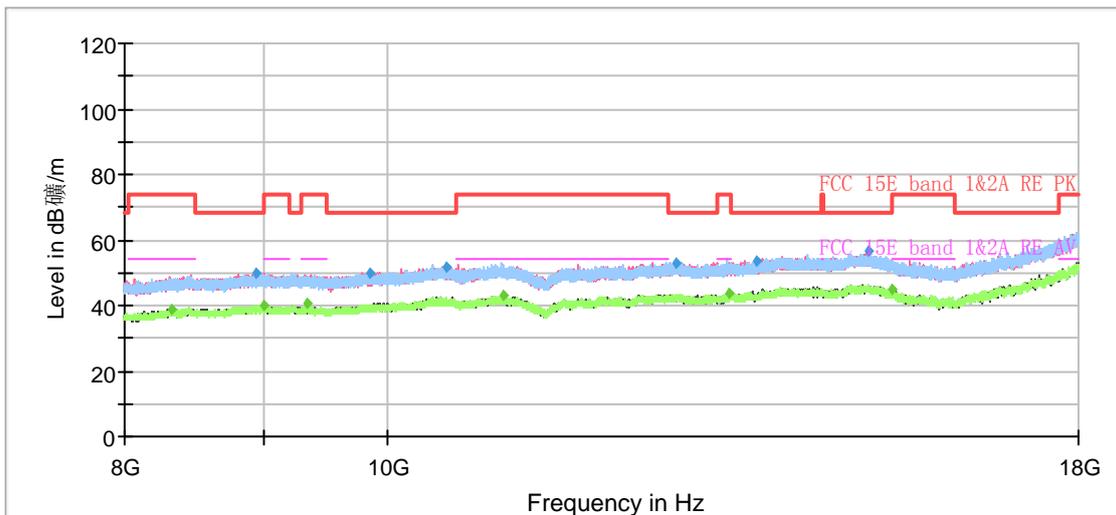


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1146.066667	---	37.32	54.00	16.68	100.0	H	0.0	-9
1290.033333	48.54	---	68.20	19.66	200.0	H	253.0	-8
1440.533333	---	42.64	54.00	11.36	200.0	V	72.0	-7
1969.500000	49.59	---	68.20	18.61	200.0	H	265.0	-5
2532.066667	52.01	---	68.20	16.19	100.0	H	0.0	-4
2812.533333	---	41.86	54.00	12.14	100.0	H	188.0	-3
3567.366667	52.49	---	68.20	15.71	100.0	H	295.0	-3
3997.633333	---	42.82	54.00	11.18	200.0	H	239.0	-1
5146.566667	---	44.46	54.00	9.54	200.0	V	235.0	2
5610.200000	54.83	---	68.20	13.37	200.0	V	291.0	3
7558.300000	---	47.18	54.00	6.82	200.0	V	1.0	7
7866.766667	58.64	---	68.20	9.56	200.0	H	354.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH60

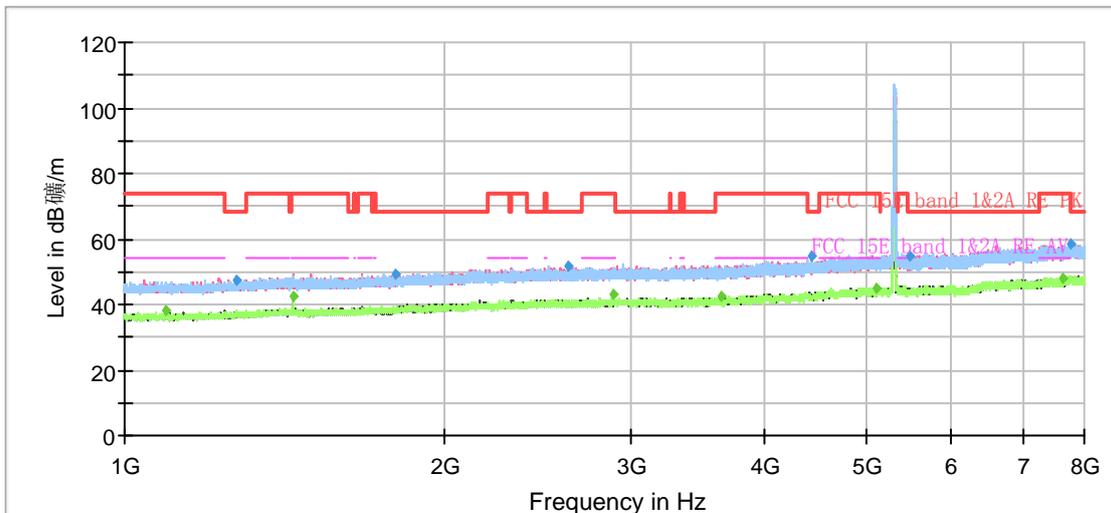

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

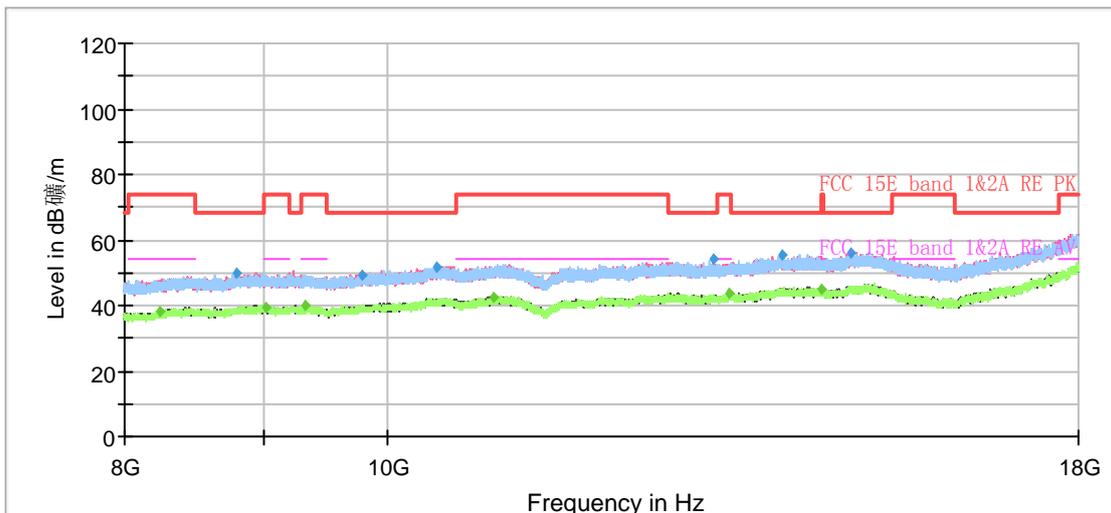


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1094.733333	---	38.04	54.00	15.96	100.0	V	97.0	-9
1274.866667	47.63	---	68.20	20.57	200.0	H	338.0	-8
1440.766667	---	42.71	54.00	11.29	200.0	V	278.0	-7
1800.566667	49.11	---	68.20	19.09	100.0	H	0.0	-6
2609.766667	51.90	---	68.20	16.30	100.0	V	359.0	-4
2881.366667	---	43.25	54.00	10.75	100.0	V	300.0	-3
3648.100000	---	42.31	54.00	11.69	200.0	V	259.0	-3
4437.000000	54.48	---	68.20	13.72	200.0	V	2.0	0
5107.600000	---	44.92	54.00	9.08	100.0	V	180.0	2
5480.466667	55.02	---	68.20	13.18	200.0	V	245.0	3
7638.566667	---	47.80	54.00	6.20	200.0	V	29.0	7
7769.700000	58.30	---	68.20	9.90	100.0	V	352.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH64

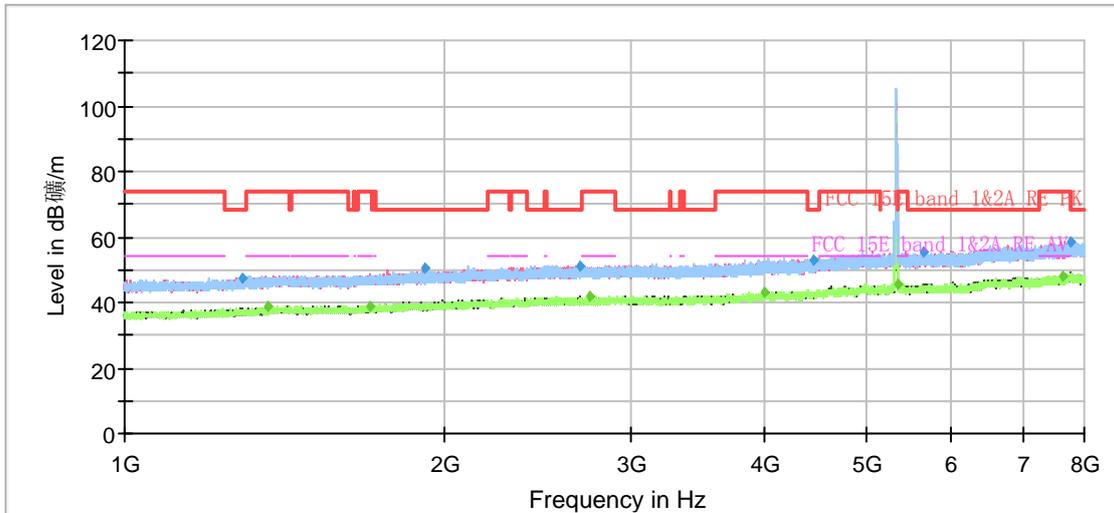

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

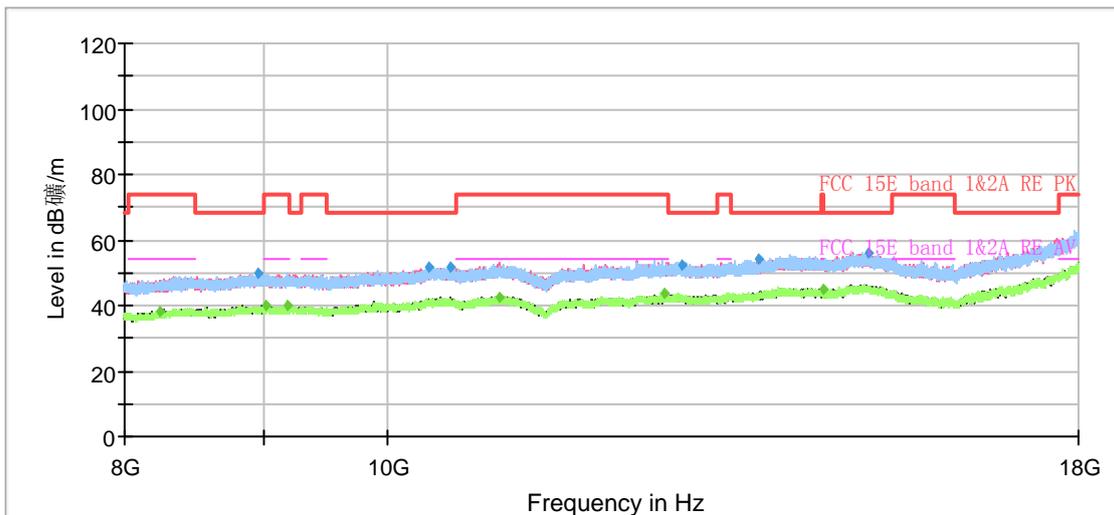

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1288.166667	47.21	---	68.20	20.99	100.0	H	194.0	-8
1365.866667	---	39.05	54.00	14.95	100.0	V	358.0	-7
1704.433333	---	39.04	54.00	14.96	100.0	H	34.0	-6
1916.766667	50.19	---	68.20	18.01	200.0	V	47.0	-5
2684.900000	51.28	---	68.20	16.92	100.0	V	356.0	-4
2742.300000	---	41.77	54.00	12.23	200.0	H	179.0	-4
3998.566667	---	42.94	54.00	11.06	200.0	V	23.0	-1
4443.300000	52.97	---	68.20	15.23	100.0	V	341.0	0
5350.966667	---	45.68	54.00	8.32	200.0	H	328.0	3
5653.833333	55.32	---	68.20	12.88	100.0	H	7.0	3
7634.833333	---	47.75	54.00	6.25	200.0	V	154.0	7
7752.433333	58.72	---	68.20	9.48	100.0	V	348.0	7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT20) CH100

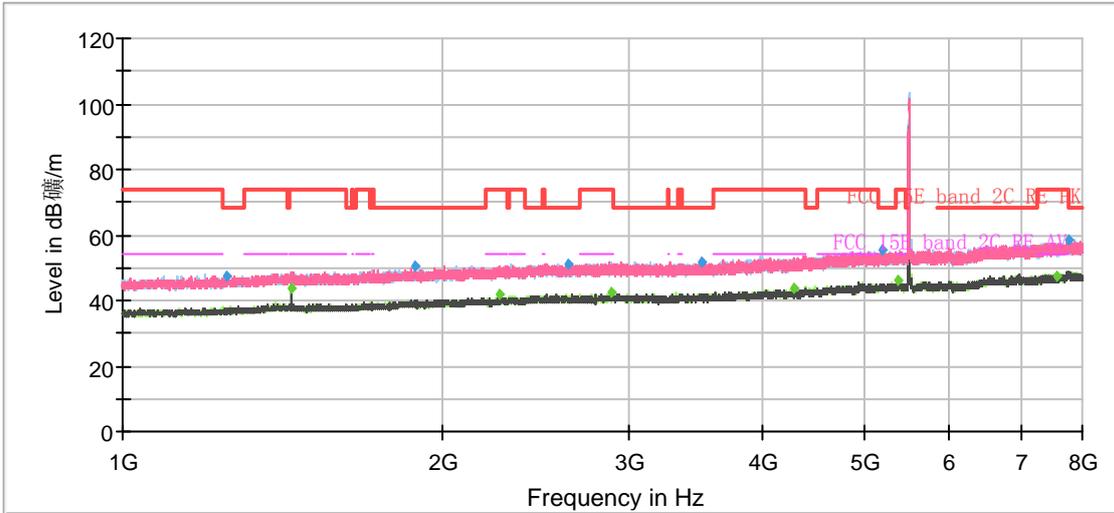

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

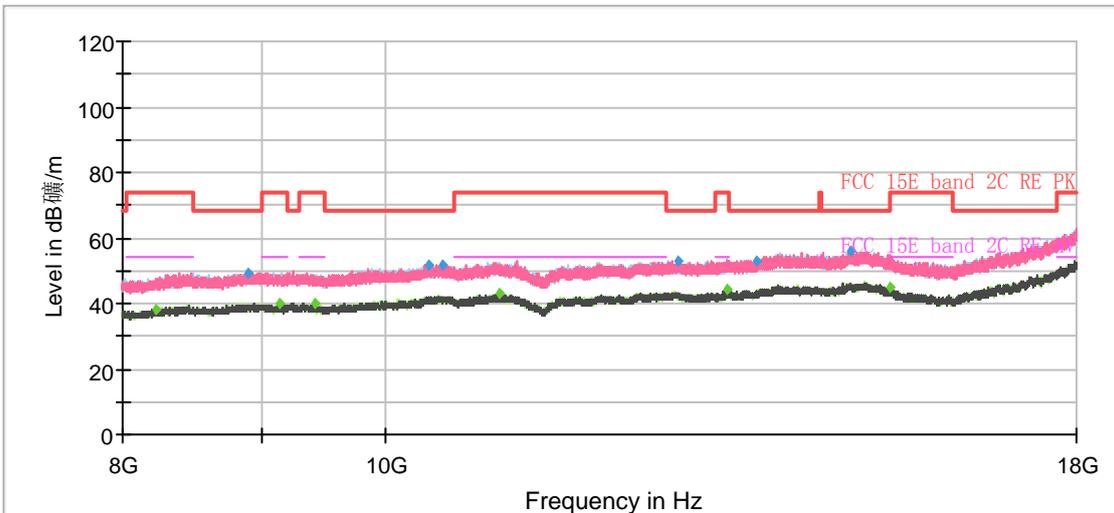

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1255.033333	47.37	---	68.20	20.83	100.0	V	3.0	-8
1440.533333	---	43.76	54.00	10.24	100.0	V	359.0	-7
1881.066667	50.19	---	68.20	18.01	200.0	V	192.0	-5
2263.733333	---	41.58	54.00	12.42	100.0	V	0.0	-4
2625.866667	51.37	---	68.20	16.83	100.0	V	307.0	-4
2881.366667	---	42.73	54.00	11.27	100.0	V	359.0	-3
3501.333333	51.66	---	68.20	16.54	200.0	H	43.0	-3
4290.233333	---	43.67	54.00	10.33	100.0	V	15.0	0
5189.033333	55.29	---	68.20	12.91	200.0	H	204.0	2
5369.400000	---	46.09	54.00	7.91	100.0	V	3.0	3
7559.000000	---	47.41	54.00	6.59	200.0	H	83.0	7
7750.333333	58.49	---	68.20	9.71	200.0	H	0.0	7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT20) CH116

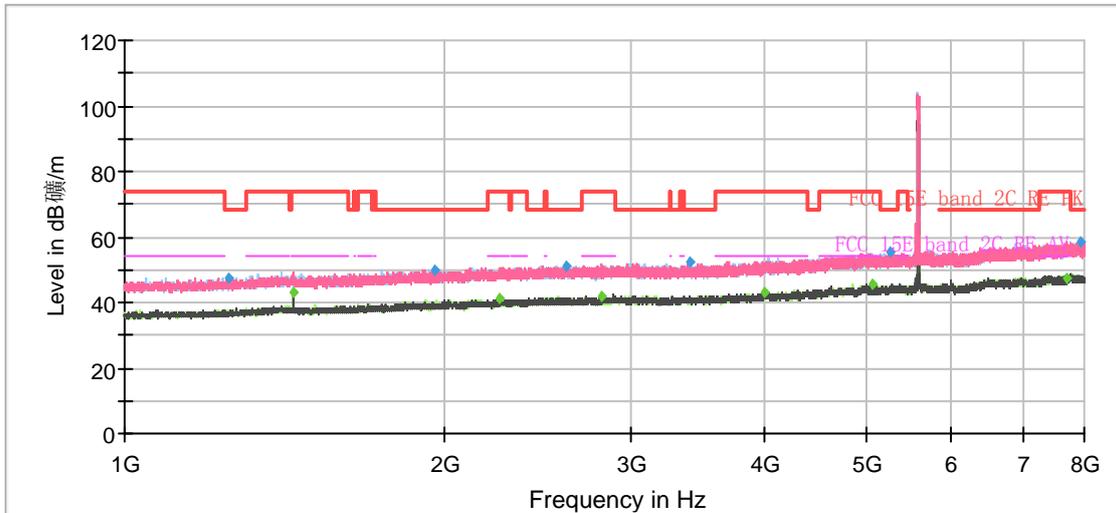

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

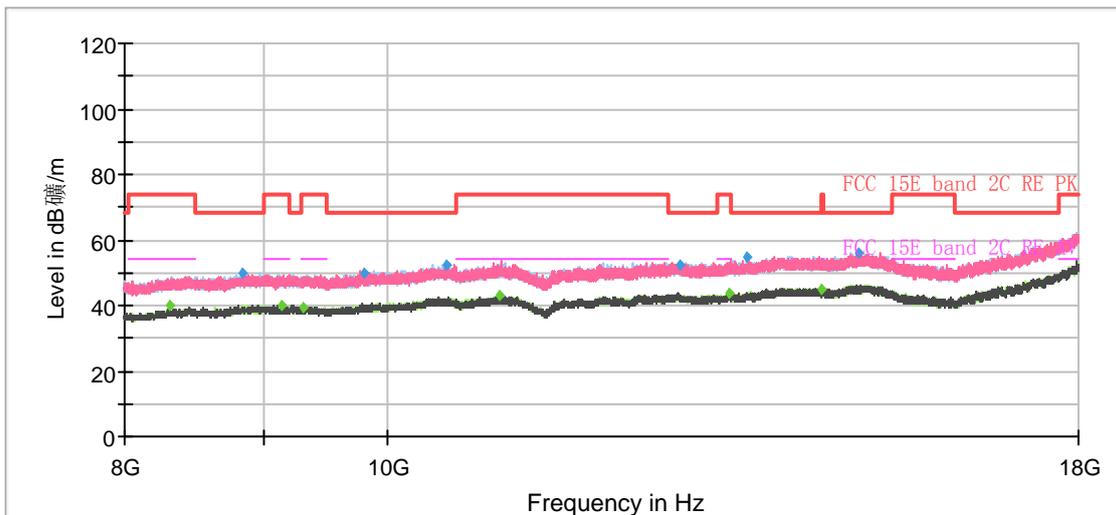


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1253.633333	47.68	---	68.20	20.52	200.0	V	339.0	-8
1440.533333	---	43.36	54.00	10.64	100.0	V	0.0	-7
1954.100000	50.14	---	68.20	18.06	200.0	H	46.0	-5
2252.533333	---	41.01	54.00	12.99	200.0	H	280.0	-4
2601.600000	51.28	---	68.20	16.92	200.0	V	40.0	-4
2811.366667	---	41.70	54.00	12.30	200.0	H	3.0	-3
3397.966667	52.05	---	68.20	16.15	200.0	V	193.0	-3
3991.800000	---	42.91	54.00	11.09	100.0	V	236.0	-1
5050.433333	---	45.72	54.00	8.28	100.0	H	0.0	2
5246.200000	55.67	---	68.20	12.53	200.0	H	73.0	2
7696.666667	---	47.55	54.00	6.45	100.0	V	112.0	7
7925.800000	58.40	---	68.20	9.80	100.0	V	222.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH140

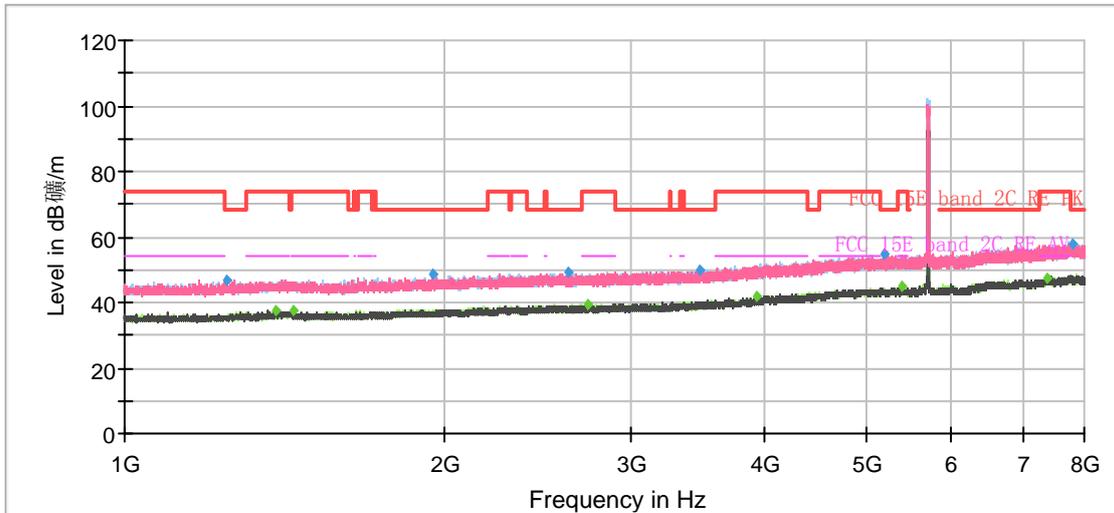

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

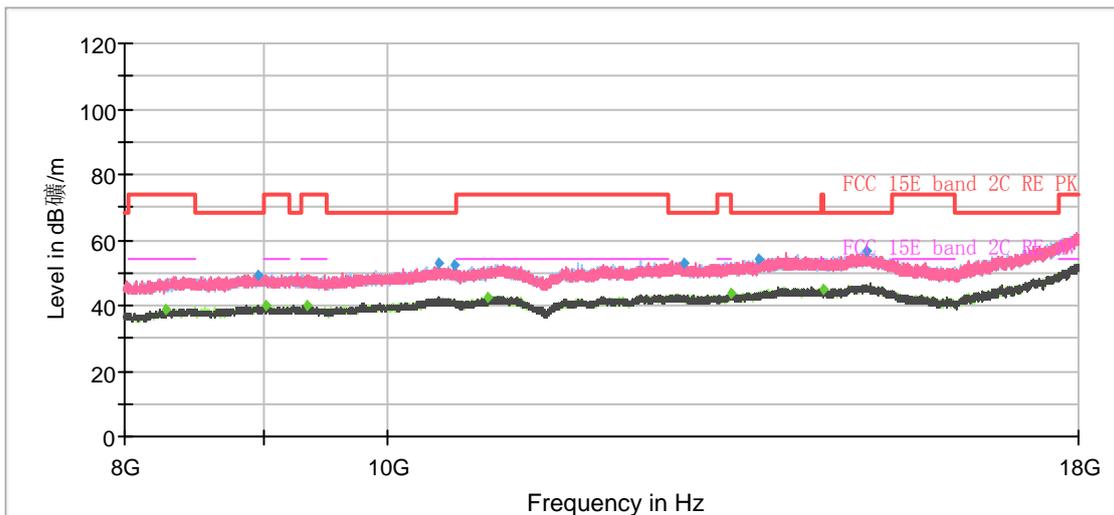


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1246.400000	46.79	---	68.20	21.41	200.0	V	225.0	-8
1388.033333	---	37.51	54.00	16.49	200.0	V	339.0	-7
1438.666667	---	37.38	54.00	16.62	100.0	H	172.0	-7
1947.566667	48.78	---	68.20	19.42	200.0	V	0.0	-5
2614.200000	49.25	---	68.20	18.95	100.0	V	168.0	-4
2723.866667	---	39.30	54.00	14.70	100.0	H	0.0	-4
3477.066667	49.97	---	68.20	18.23	100.0	H	23.0	-3
3940.700000	---	41.75	54.00	12.25	100.0	V	10.0	-2
5192.300000	54.48	---	68.20	13.72	200.0	V	0.0	2
5378.033333	---	44.74	54.00	9.26	200.0	V	277.0	3
7371.166667	---	47.17	54.00	6.83	200.0	V	119.0	7
7790.466667	58.09	---	68.20	10.11	100.0	V	10.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH149

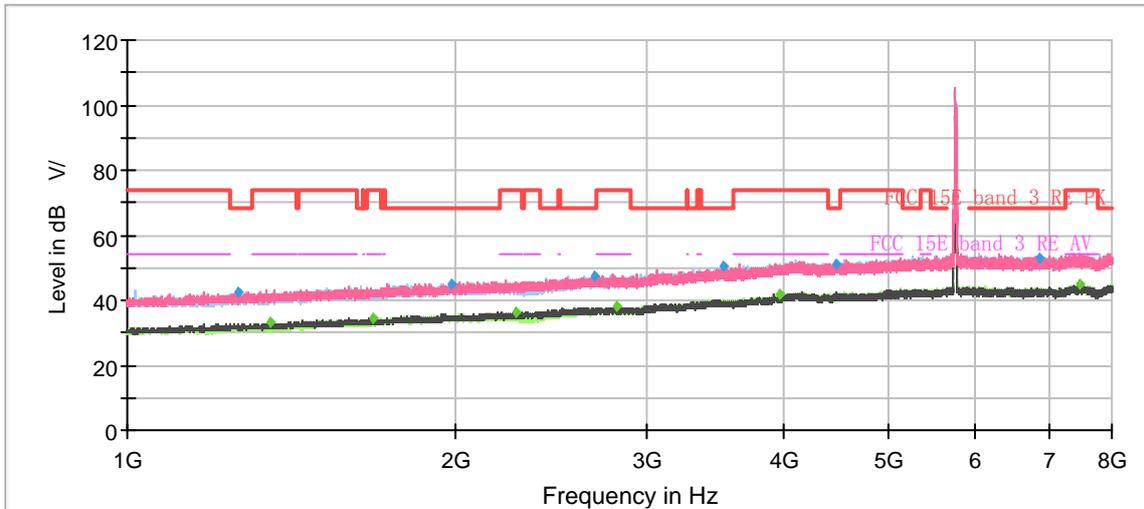

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

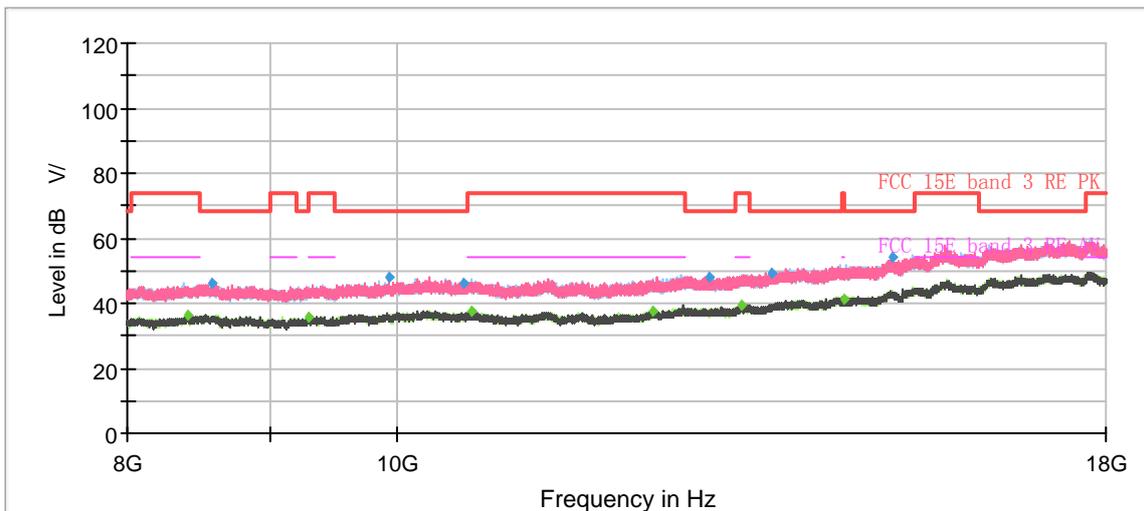

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1264.600000	42.76	---	68.20	25.44	100.0	V	330.0	-7
1353.500000	---	33.26	54.00	20.74	100.0	V	87.0	-7
1676.900000	---	34.40	54.00	19.60	200.0	V	0.0	-5
1983.966667	45.21	---	68.20	22.99	200.0	H	67.0	-3
2270.500000	---	36.17	54.00	17.83	200.0	V	143.0	-2
2681.400000	47.57	---	68.20	20.63	200.0	V	0.0	0
2811.833333	---	38.00	54.00	16.00	200.0	V	275.0	1
3520.700000	50.37	---	68.20	17.83	100.0	V	225.0	4
3963.800000	---	41.89	54.00	12.11	100.0	H	0.0	6
4459.866667	51.12	---	68.20	17.08	100.0	H	190.0	7
6870.900000	52.87	---	68.20	15.33	200.0	H	46.0	11
7480.600000	---	44.62	54.00	9.38	200.0	H	184.0	11


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT20) CH157

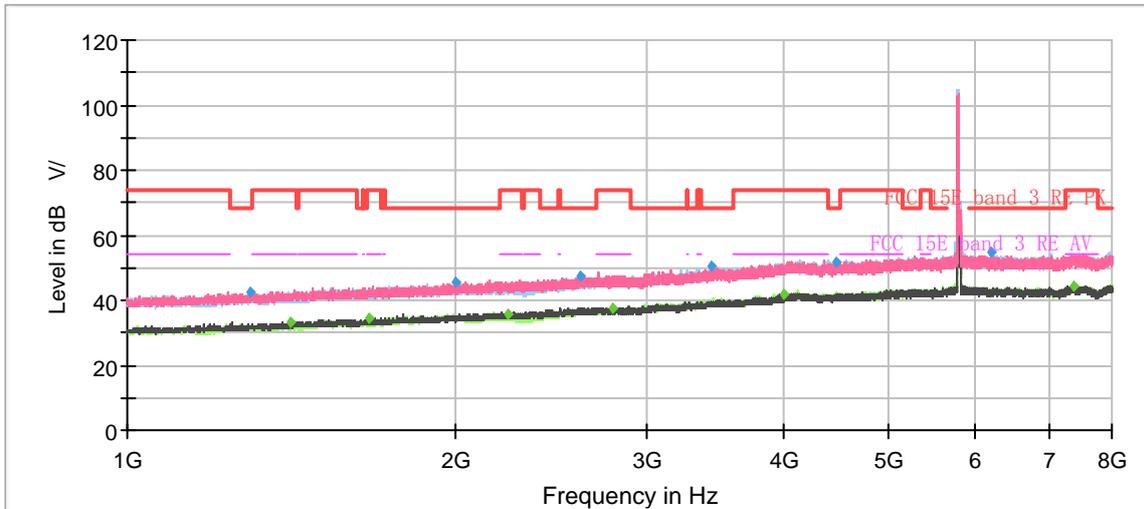

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

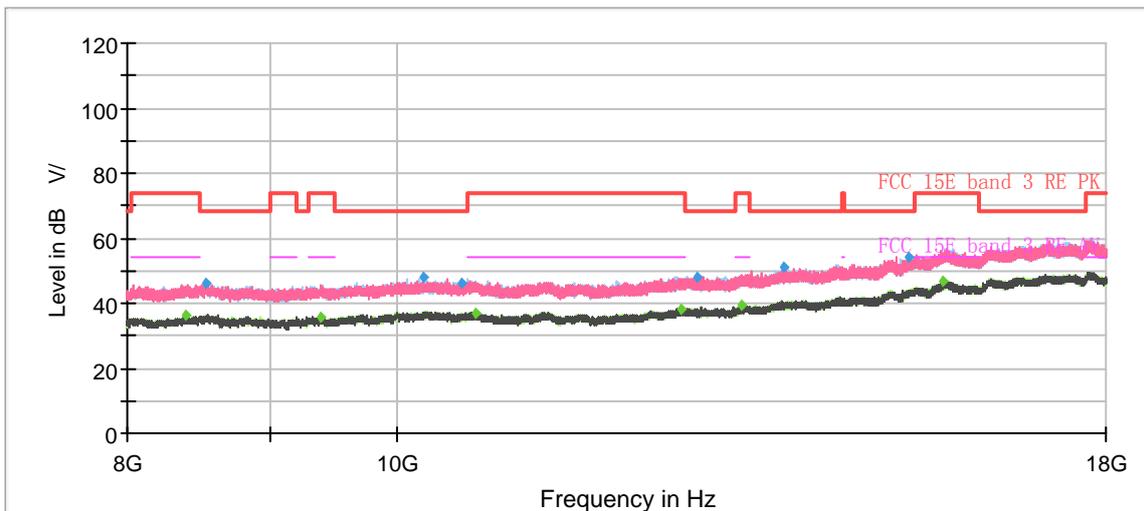

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1297.266667	42.59	---	68.20	25.61	100.0	V	142.0	-7
1408.566667	---	33.44	54.00	20.56	100.0	V	78.0	-6
1668.500000	---	34.40	54.00	19.60	200.0	V	255.0	-5
1996.566667	45.33	---	68.20	22.87	100.0	H	358.0	-3
2231.066667	---	35.68	54.00	18.32	100.0	V	0.0	-2
2600.200000	47.24	---	68.20	20.96	200.0	V	289.0	0
2786.633333	---	37.67	54.00	16.33	200.0	V	316.0	1
3437.866667	50.33	---	68.20	17.87	200.0	V	103.0	4
3996.466667	---	41.75	54.00	12.25	100.0	H	124.0	6
4459.166667	51.50	---	68.20	16.70	100.0	V	218.0	7
6187.000000	55.01	---	68.20	13.19	100.0	H	89.0	10
7389.833333	---	44.42	54.00	9.58	100.0	H	351.0	11


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH165

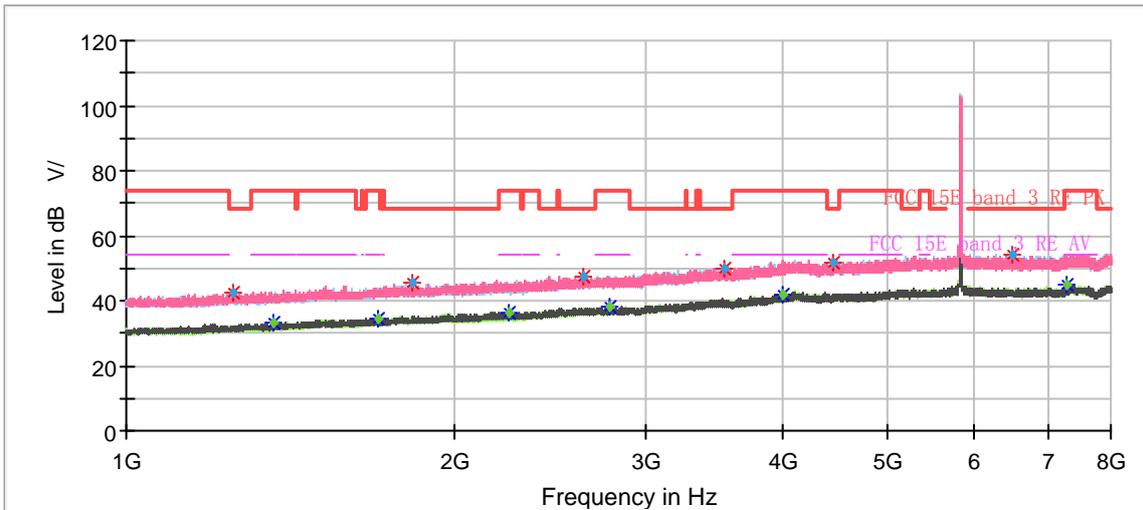

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

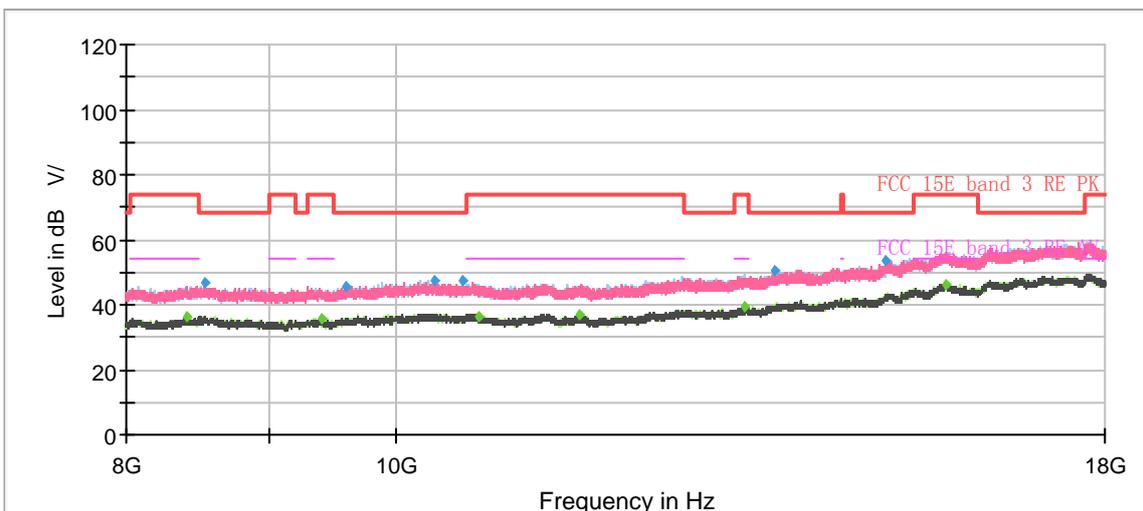


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1251.766667	42.28	---	68.20	25.92	100.0	H	178.0	-7
1362.133333	---	33.20	54.00	20.80	100.0	V	188.0	-7
1698.600000	---	34.34	54.00	19.66	100.0	V	146.0	-5
1833.000000	45.43	---	68.20	22.77	200.0	V	325.0	-4
2244.133333	---	36.18	54.00	17.82	100.0	V	113.0	-2
2626.100000	47.24	---	68.20	20.96	100.0	V	357.0	0
2774.033333	---	38.29	54.00	15.71	200.0	H	117.0	1
3534.466667	50.14	---	68.20	18.06	100.0	H	340.0	4
3996.000000	---	41.66	54.00	12.34	100.0	V	126.0	6
4456.366667	51.85	---	68.20	16.35	100.0	H	65.0	7
6505.966667	54.22	---	68.20	13.98	200.0	V	312.0	10
7289.733333	---	44.62	54.00	9.38	200.0	V	359.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH38

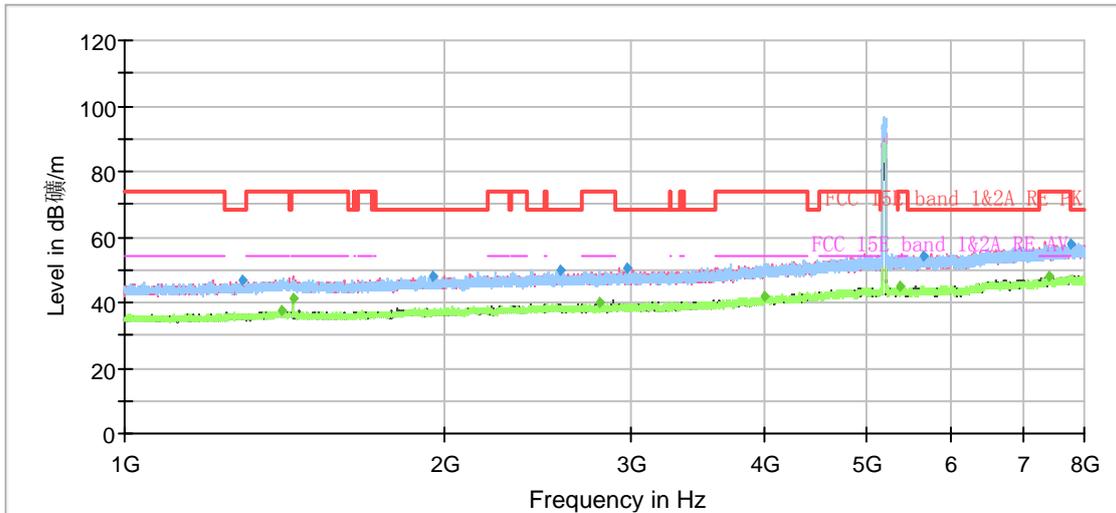

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

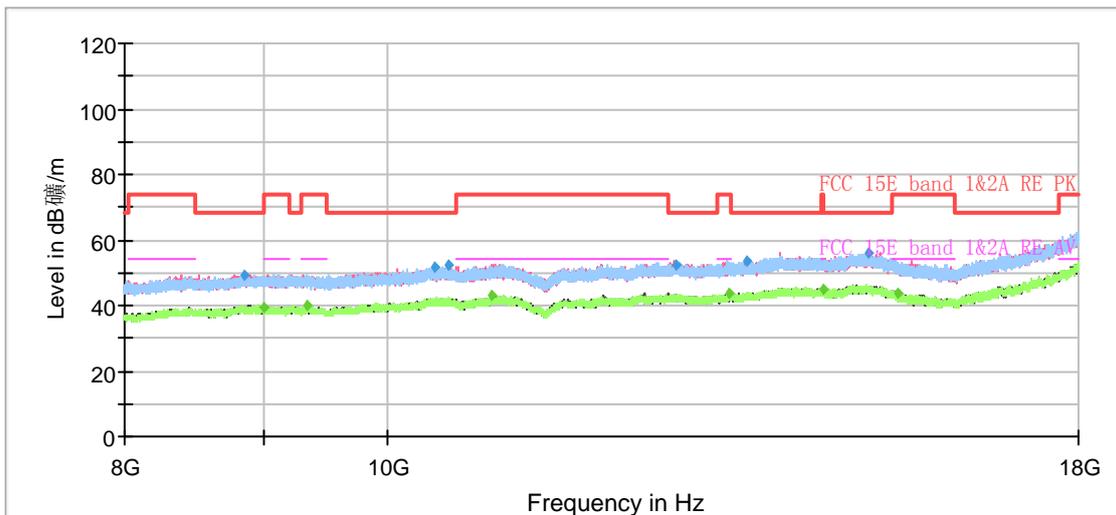


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1291.433333	46.73	---	68.20	21.47	100.0	H	12.0	-8
1404.133333	---	37.30	54.00	16.70	100.0	V	185.0	-7
1440.533333	---	41.08	54.00	12.92	100.0	V	0.0	-7
1948.966667	48.03	---	68.20	20.17	200.0	H	108.0	-5
2575.466667	49.69	---	68.20	18.51	200.0	V	6.0	-4
2797.833333	---	39.70	54.00	14.30	200.0	V	4.0	-4
2974.466667	50.63	---	68.20	17.57	100.0	H	68.0	-3
3999.733333	---	41.55	54.00	12.45	100.0	H	227.0	-1
5375.233333	---	44.67	54.00	9.33	200.0	V	194.0	3
5633.300000	54.19	---	68.20	14.01	200.0	V	0.0	3
7396.600000	---	47.87	54.00	6.13	100.0	H	95.0	7
7779.733333	58.01	---	68.20	10.19	200.0	H	134.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

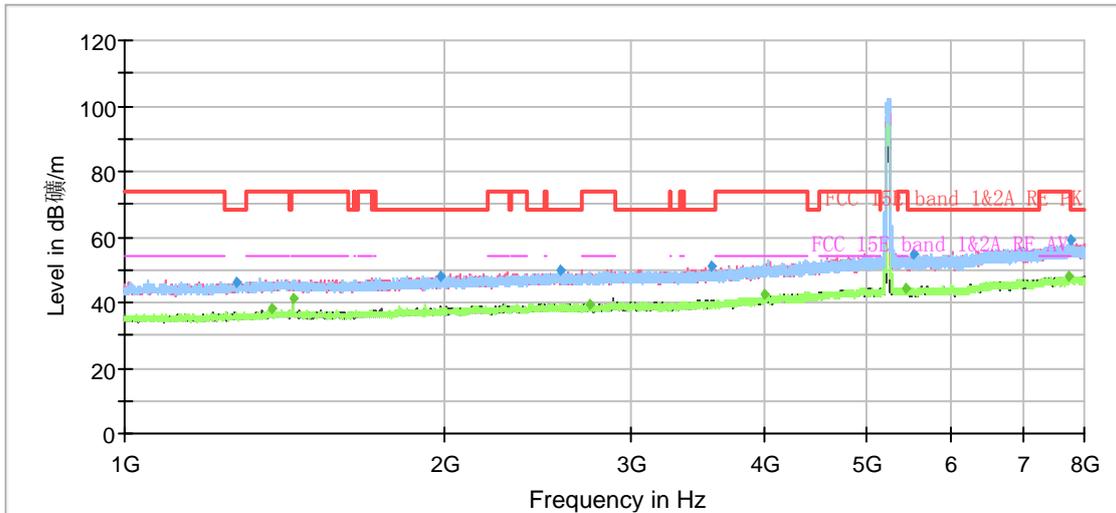

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

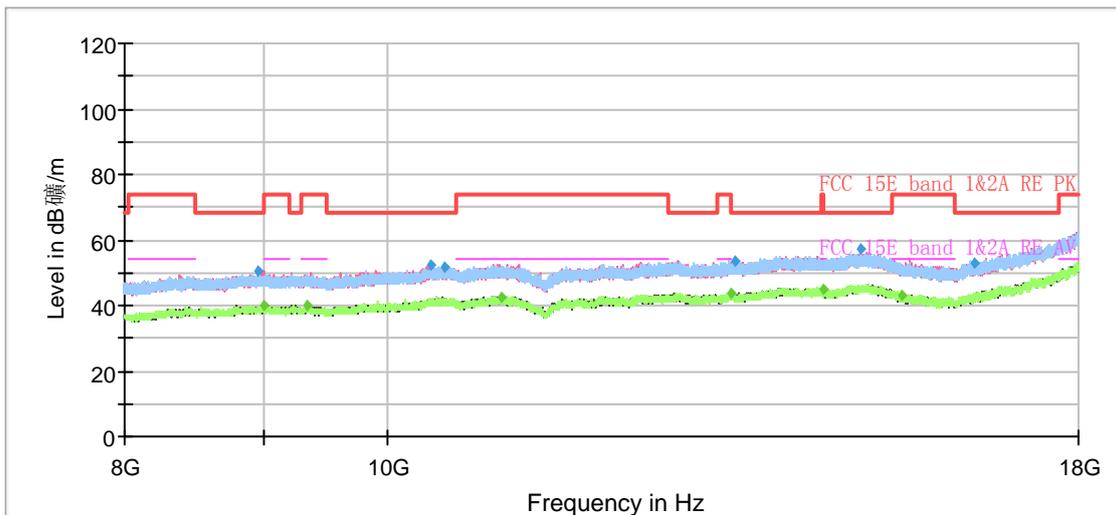


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1271.600000	46.46	---	68.20	21.74	200.0	V	231.0	-8
1378.466667	---	37.89	54.00	16.11	200.0	V	244.0	-7
1440.533333	---	41.38	54.00	12.62	100.0	V	2.0	-7
1985.133333	48.26	---	68.20	19.94	100.0	H	234.0	-5
2564.966667	49.66	---	68.20	18.54	100.0	V	191.0	-4
2742.766667	---	39.67	54.00	14.33	200.0	H	142.0	-4
3564.800000	51.08	---	68.20	17.12	200.0	H	257.0	-3
3997.633333	---	42.28	54.00	11.72	100.0	V	49.0	-1
5427.266667	---	44.57	54.00	9.43	100.0	H	169.0	3
5524.566667	54.47	---	68.20	13.73	200.0	H	129.0	3
7729.333333	---	47.99	54.00	6.01	100.0	H	5.0	7
7780.433333	58.78	---	68.20	9.42	100.0	H	0.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH54

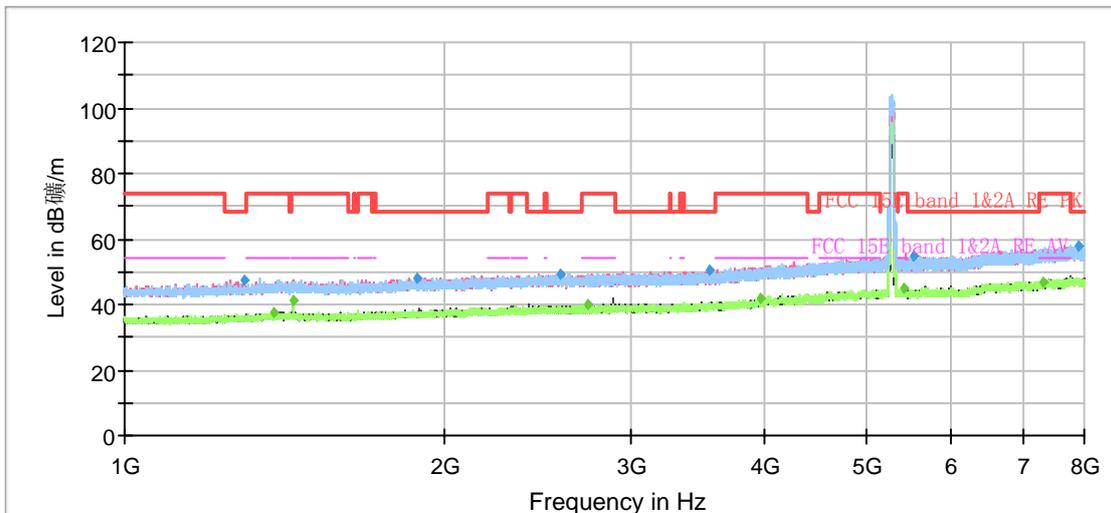

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

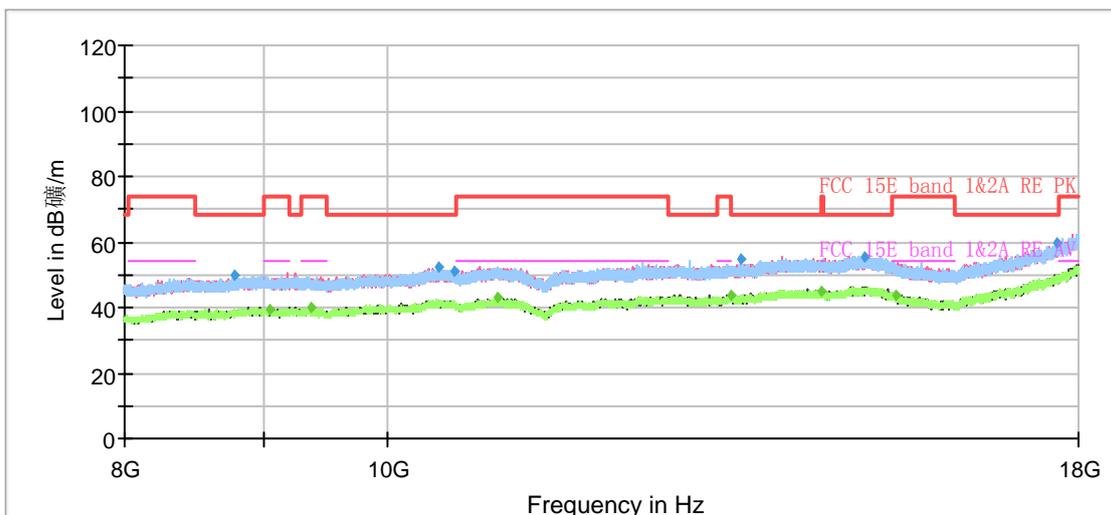

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1294.933333	47.22	---	68.20	20.98	200.0	V	0.0	-8
1381.266667	---	37.79	54.00	16.21	100.0	V	107.0	-7
1440.533333	---	41.15	54.00	12.85	100.0	V	0.0	-7
1882.700000	48.20	---	68.20	20.00	100.0	H	1.0	-5
2572.666667	49.50	---	68.20	18.70	200.0	V	107.0	-4
2728.300000	---	39.79	54.00	14.21	100.0	V	174.0	-4
3556.866667	50.29	---	68.20	17.91	100.0	H	106.0	-3
3962.633333	---	41.87	54.00	12.13	100.0	V	0.0	-1
5419.333333	---	44.72	54.00	9.28	100.0	V	0.0	3
5527.133333	54.61	---	68.20	13.59	100.0	V	341.0	3
7325.200000	---	47.00	54.00	7.00	200.0	V	2.0	7
7911.800000	58.10	---	68.20	10.10	100.0	H	158.0	7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT40) CH62

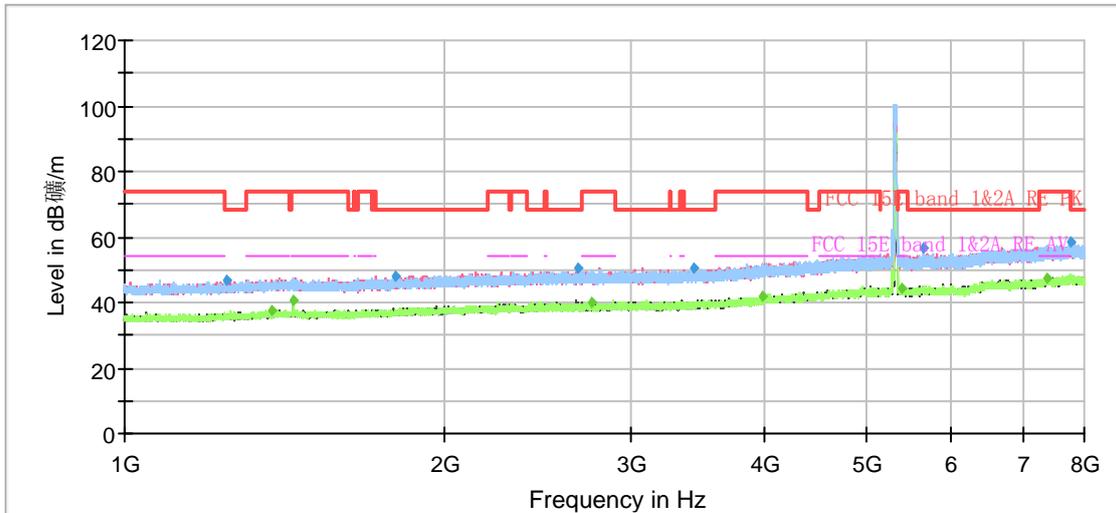

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

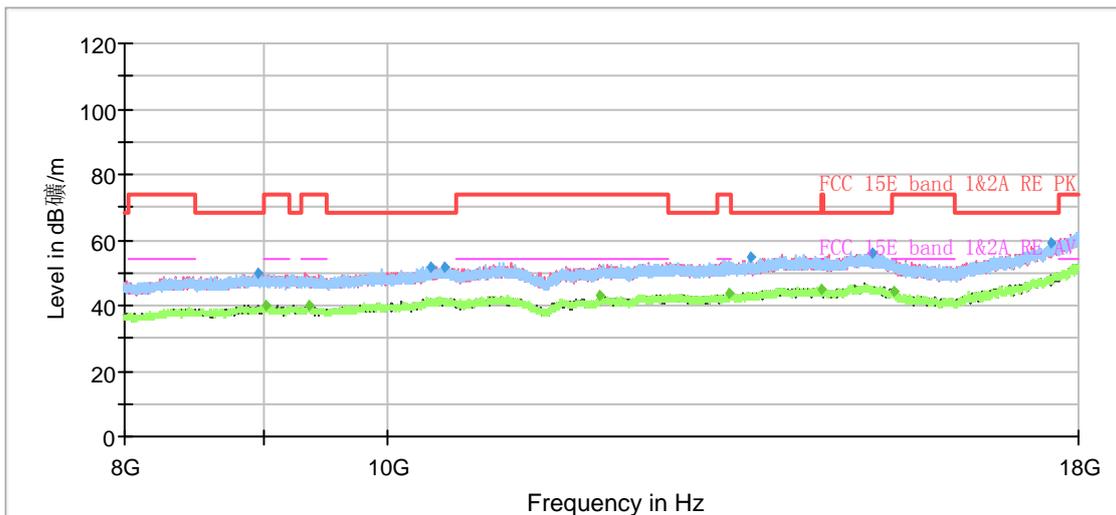

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1245.000000	46.64	---	68.20	21.56	100.0	H	172.0	-8
1378.466667	---	37.80	54.00	16.20	100.0	H	115.0	-7
1440.533333	---	40.57	54.00	13.43	100.0	V	0.0	-7
1797.766667	48.24	---	68.20	19.96	100.0	H	226.0	-6
2674.866667	50.34	---	68.20	17.86	100.0	V	163.0	-3
2746.266667	---	39.91	54.00	14.09	100.0	H	6.0	-4
3432.500000	50.67	---	68.20	17.53	200.0	H	272.0	-3
3984.800000	---	41.74	54.00	12.26	200.0	V	280.0	-1
5388.300000	---	44.26	54.00	9.74	100.0	H	350.0	3
5637.733333	56.48	---	68.20	11.72	100.0	H	358.0	3
7376.066667	---	47.38	54.00	6.62	200.0	V	226.0	7
7761.066667	58.70	---	68.20	9.50	200.0	V	37.0	7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT40) CH102

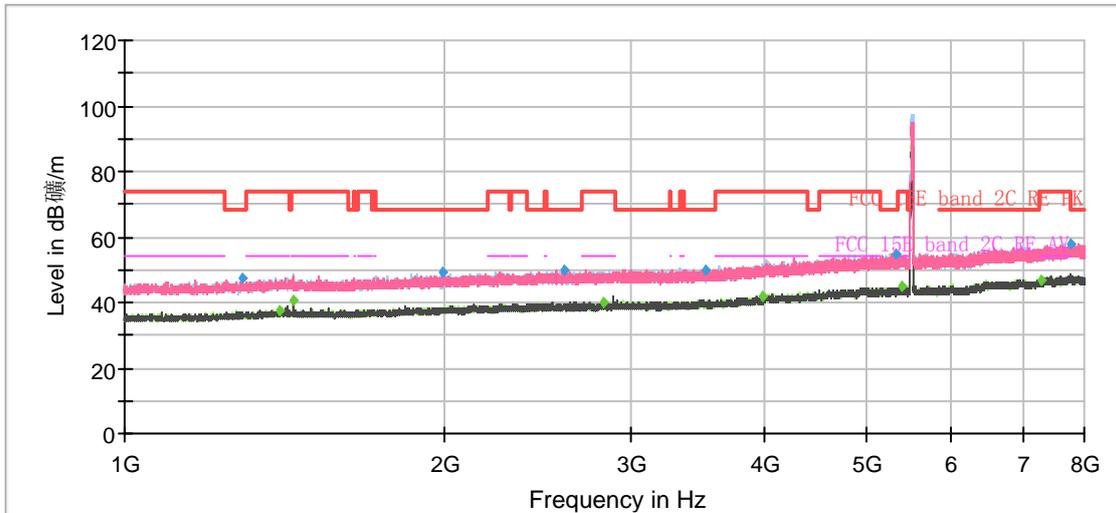

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

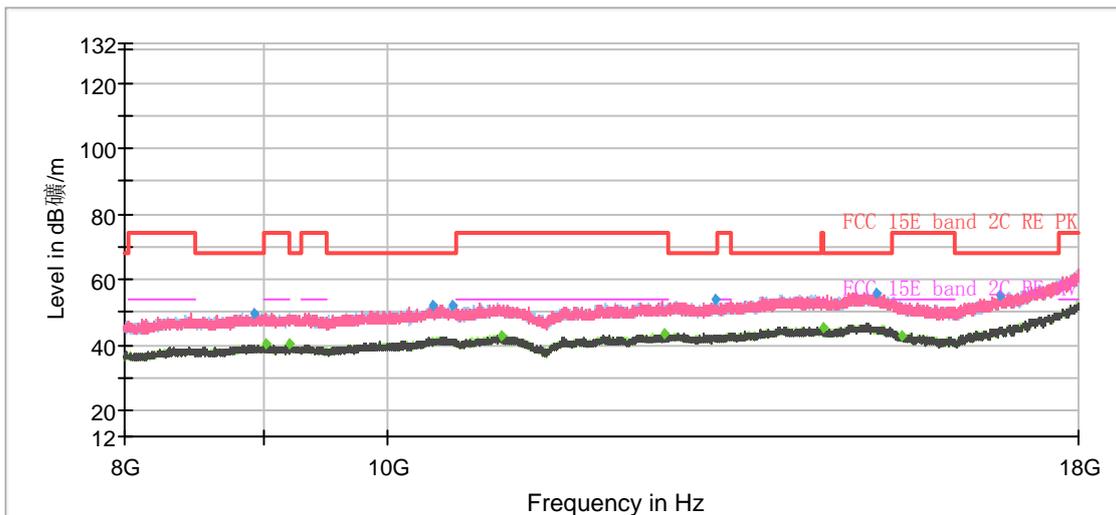

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1290.266667	47.45	---	68.20	20.76	200.0	H	170.0	-8
1398.533333	---	37.80	54.00	16.20	100.0	H	307.0	-7
1440.533333	---	40.88	54.00	13.12	100.0	V	116.0	-7
1989.333333	49.40	---	68.20	18.80	100.0	H	356.0	-5
2588.766667	49.91	---	68.20	18.29	100.0	H	254.0	-4
2820.233333	---	40.12	54.00	13.88	100.0	V	350.0	-3
3521.866667	50.15	---	68.20	18.05	200.0	V	166.0	-3
3985.500000	---	42.07	54.00	11.93	100.0	V	16.0	-1
5329.733333	54.60	---	68.20	13.60	200.0	H	1.0	3
5397.866667	---	44.68	54.00	9.32	200.0	H	17.0	3
7293.233333	---	46.77	54.00	7.23	200.0	V	299.0	6
7764.566667	58.05	---	68.20	10.15	100.0	V	16.0	7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT40) CH118

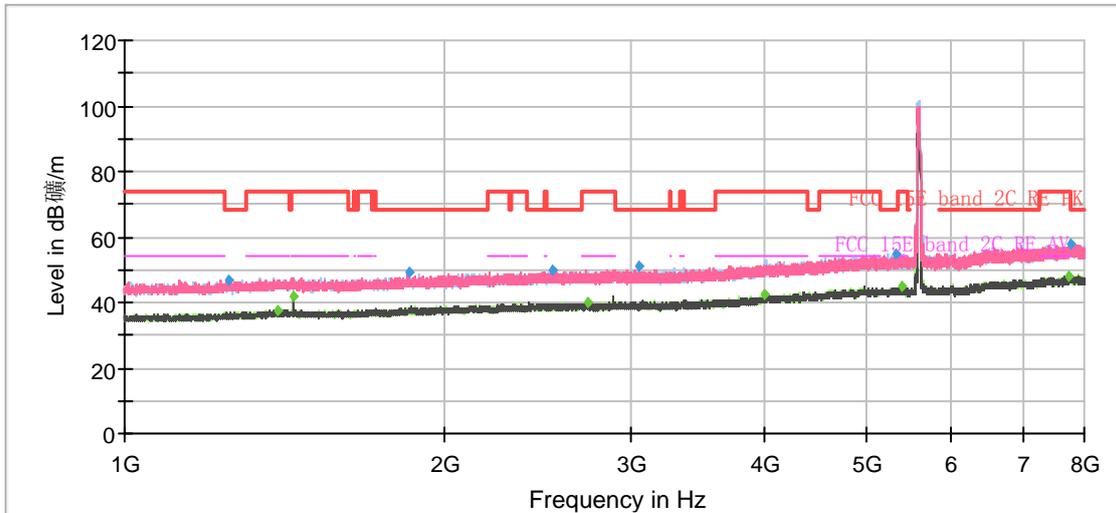

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

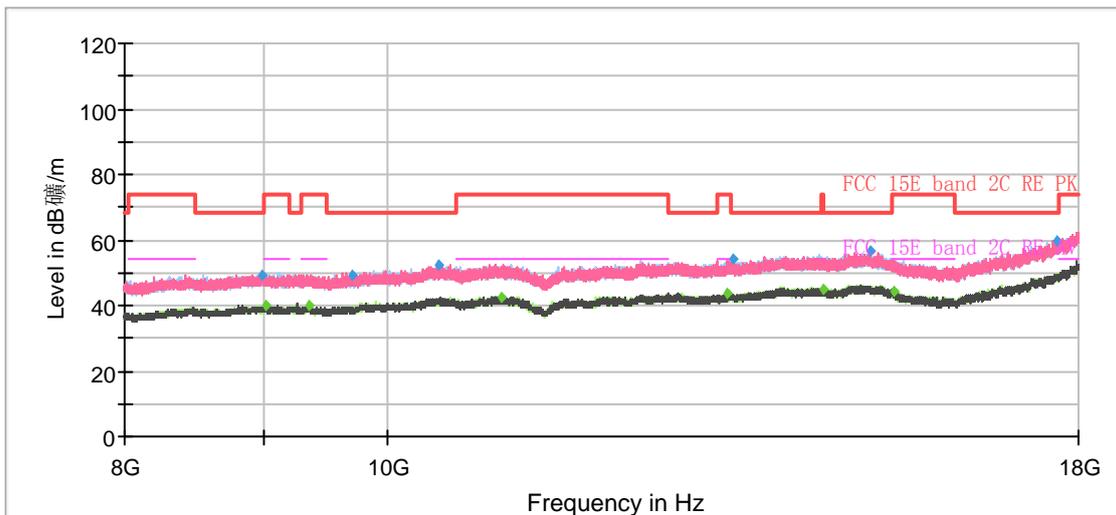


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1252.000000	46.89	---	68.20	21.31	200.0	V	280.0	-8
1393.633333	---	37.59	54.00	16.41	200.0	V	338.0	-7
1440.533333	---	41.76	54.00	12.24	100.0	V	2.0	-7
1854.933333	49.10	---	68.20	19.10	200.0	V	205.0	-5
2526.933333	49.61	---	68.20	18.59	100.0	V	4.0	-4
2728.533333	---	40.08	54.00	13.92	100.0	V	18.0	-4
3044.000000	51.00	---	68.20	17.20	100.0	H	306.0	-3
3993.433333	---	42.49	54.00	11.51	200.0	H	3.0	-1
5309.900000	54.53	---	68.20	13.67	200.0	V	345.0	2
5386.200000	---	44.98	54.00	9.02	200.0	H	0.0	3
7737.266667	---	47.90	54.00	6.10	200.0	V	267.0	7
7764.100000	57.93	---	68.20	10.27	100.0	H	80.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT40) CH134

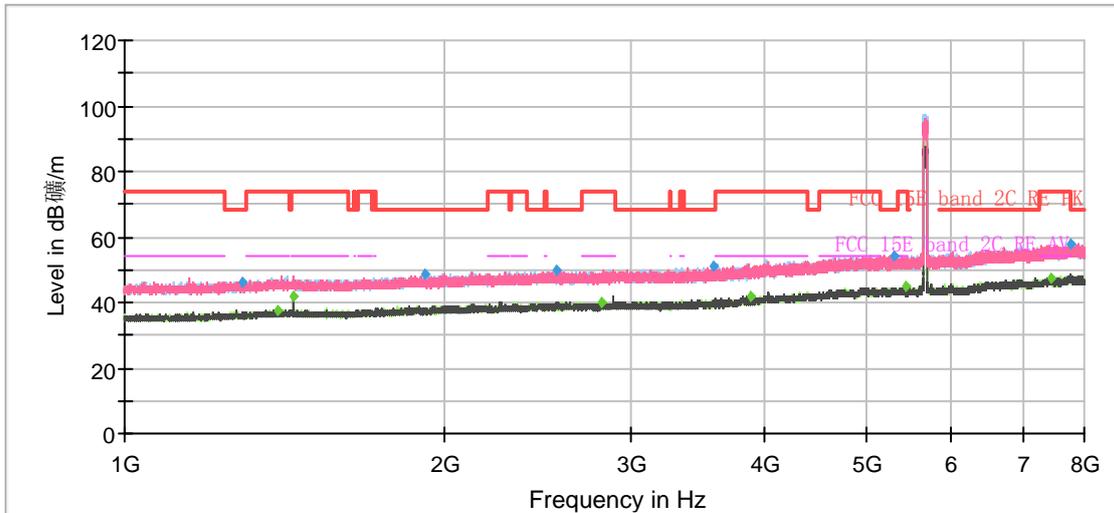

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

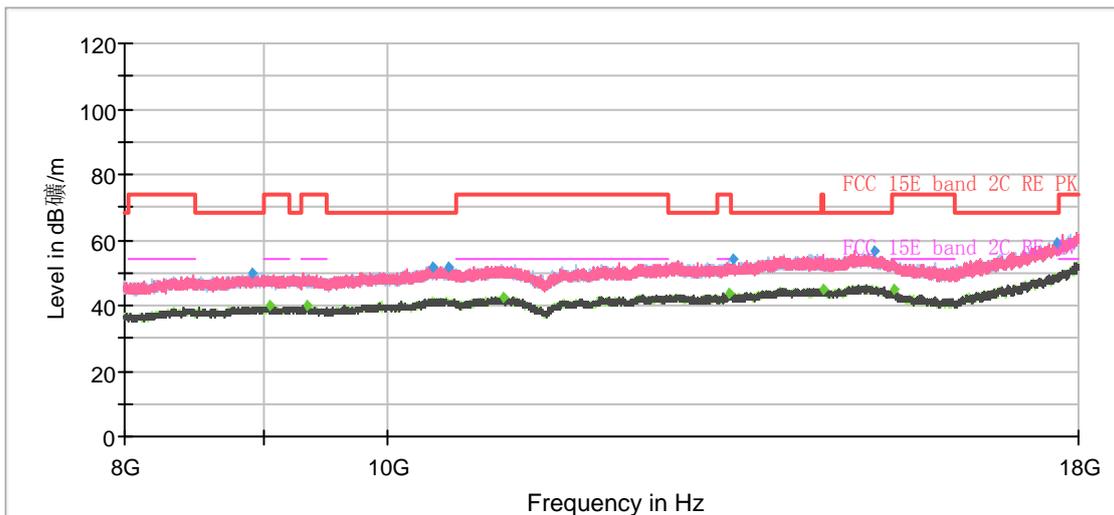

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1292.366667	46.39	---	68.20	21.81	200.0	V	358.0	-8
1395.033333	---	37.73	54.00	16.27	100.0	H	342.0	-7
1440.533333	---	41.86	54.00	12.14	100.0	V	4.0	-7
1915.366667	48.87	---	68.20	19.33	200.0	V	2.0	-5
2549.100000	49.99	---	68.20	18.21	100.0	V	147.0	-4
2816.033333	---	39.97	54.00	14.03	100.0	H	306.0	-3
3584.633333	51.17	---	68.20	17.03	100.0	V	2.0	-3
3887.266667	---	41.96	54.00	12.04	200.0	V	110.0	-2
5303.133333	54.28	---	68.20	13.92	200.0	V	354.0	2
5435.200000	---	44.68	54.00	9.32	100.0	H	268.0	3
7436.033333	---	47.64	54.00	6.36	100.0	H	342.0	7
7751.266667	57.80	---	68.20	10.40	200.0	H	133.0	7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT40) CH142

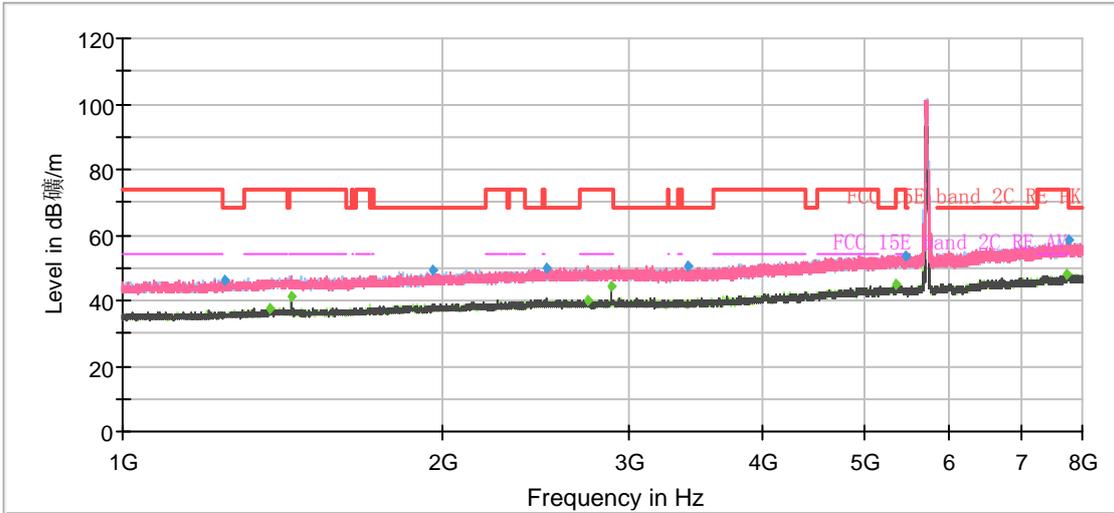

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

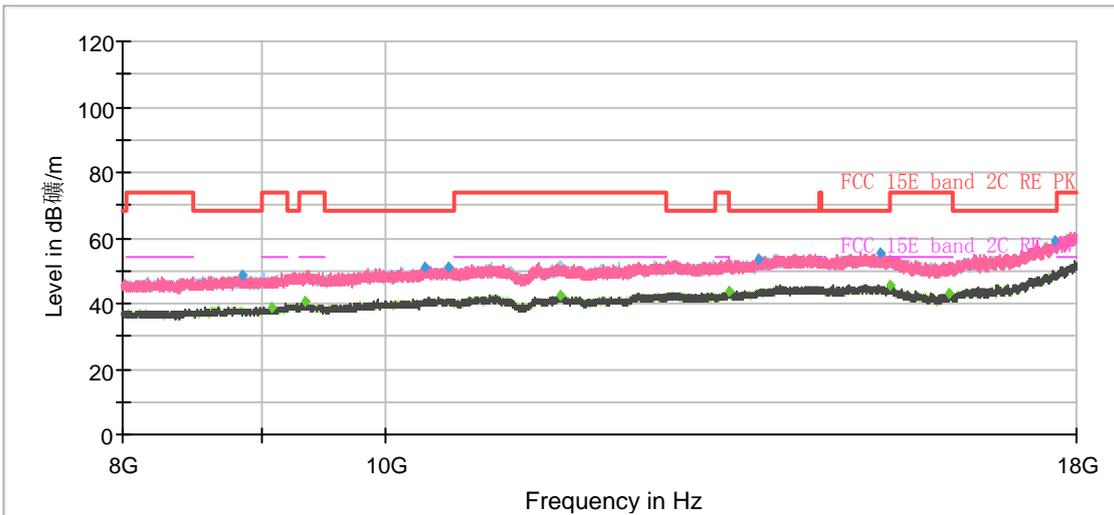


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1245.933333	46.44	---	68.20	21.76	200.0	V	16.0	-8
1378.466667	---	37.64	54.00	16.36	100.0	H	0.0	-7
1440.533333	---	40.98	54.00	13.02	200.0	H	346.0	-7
1955.266667	49.11	---	68.20	19.09	100.0	H	85.0	-5
2509.433333	49.89	---	68.20	18.31	200.0	H	123.0	-4
2737.400000	---	40.27	54.00	13.73	200.0	H	216.0	-4
2881.366667	---	44.10	54.00	9.90	100.0	V	272.0	-3
3405.433333	50.58	---	68.20	17.62	200.0	V	16.0	-3
5350.266667	---	44.68	54.00	9.32	100.0	H	346.0	3
5464.600000	53.64	---	68.20	14.56	200.0	H	10.0	3
7724.666667	---	47.98	54.00	6.02	100.0	H	0.0	7
7775.766667	58.23	---	68.20	9.97	200.0	V	4.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT40) CH151

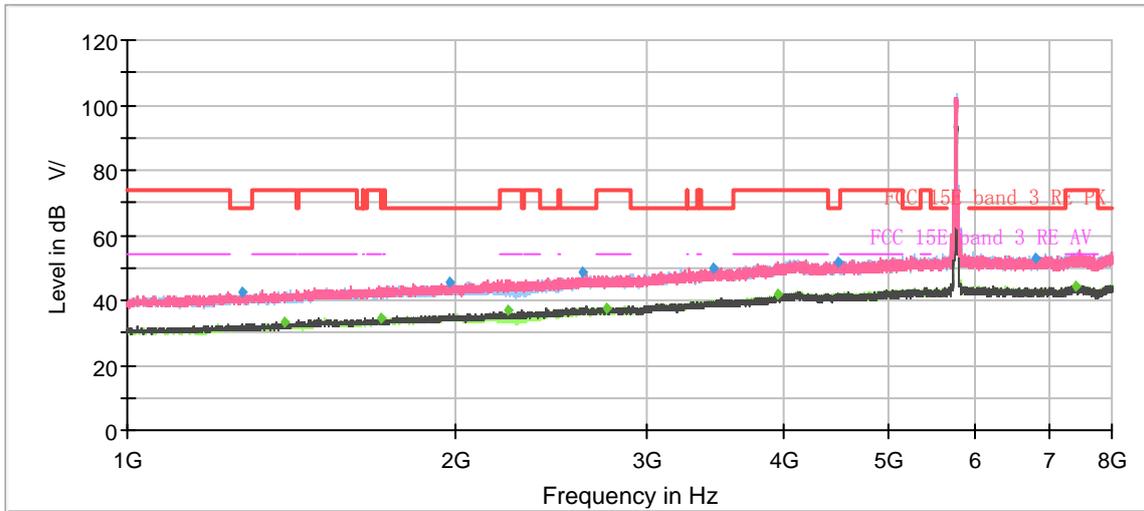

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

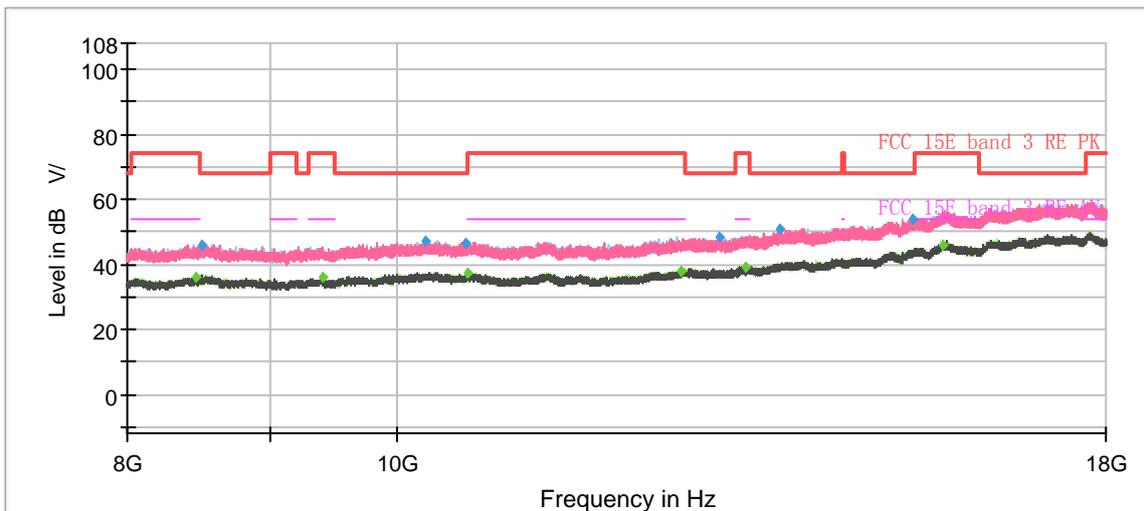

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1276.966667	42.40	---	68.20	25.80	100.0	V	245.0	-7
1391.066667	---	33.00	54.00	21.00	100.0	H	65.0	-6
1709.100000	---	34.60	54.00	19.40	100.0	V	0.0	-5
1975.100000	45.28	---	68.20	22.92	200.0	V	162.0	-3
2236.433333	---	36.69	54.00	17.31	200.0	V	185.0	-2
2611.400000	48.49	---	68.20	19.71	100.0	H	340.0	0
2748.600000	---	37.68	54.00	16.32	200.0	V	0.0	1
3453.966667	50.00	---	68.20	18.20	100.0	V	106.0	4
3954.700000	---	41.78	54.00	12.22	100.0	H	141.0	6
4495.333333	51.76	---	68.20	16.44	200.0	H	51.0	7
6794.133333	52.92	---	68.20	15.28	200.0	H	211.0	10
7408.500000	---	44.42	54.00	9.58	100.0	H	300.0	11


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11n (HT40) CH159

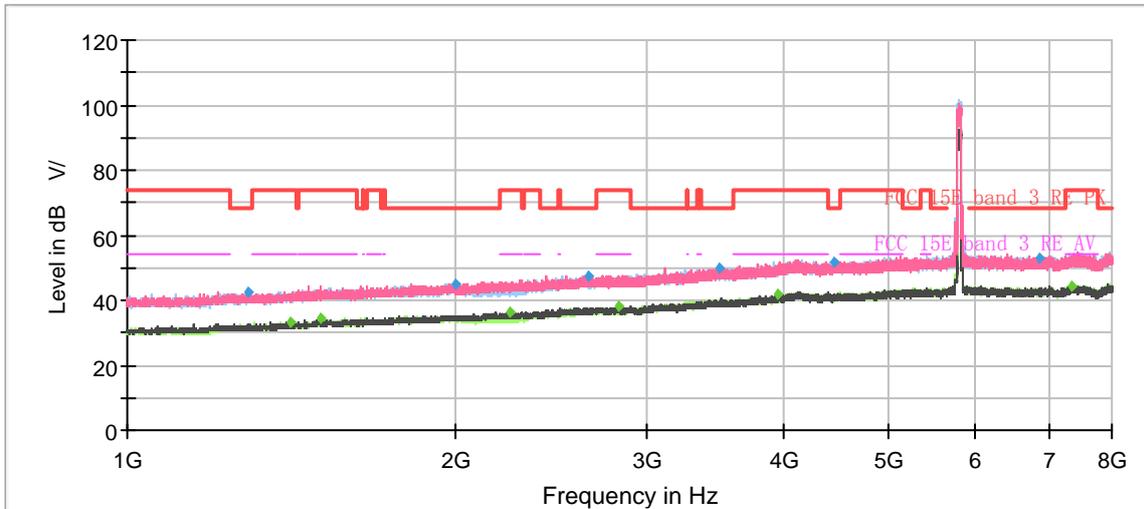

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

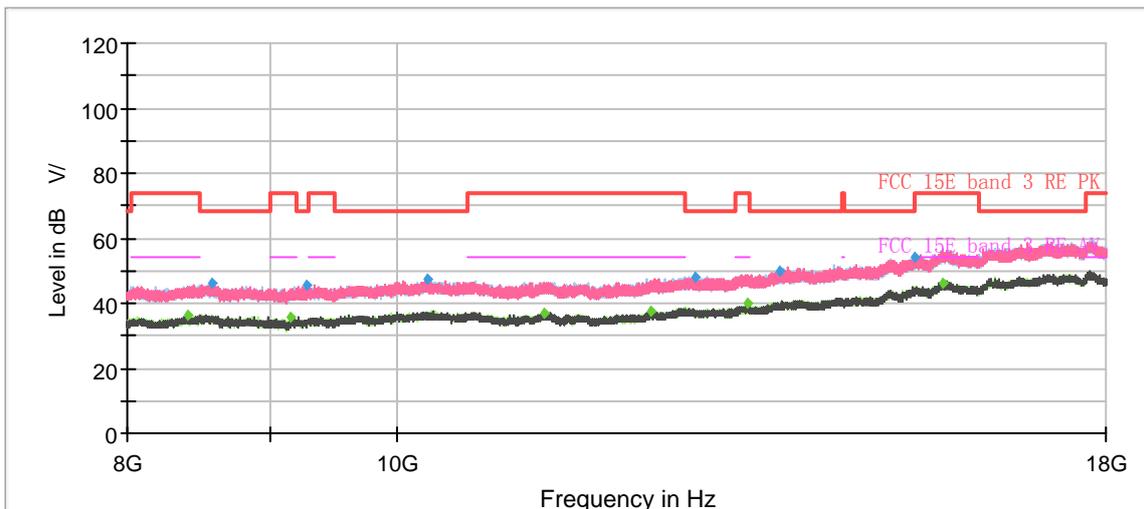


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1291.666667	42.23	---	68.20	25.97	200.0	H	343.0	-7
1409.033333	---	33.30	54.00	20.70	100.0	V	172.0	-6
1503.766667	---	34.33	54.00	19.67	200.0	V	349.0	-6
1999.833333	45.00	---	68.20	23.20	200.0	H	59.0	-3
2244.366667	---	36.03	54.00	17.97	200.0	V	294.0	-2
2652.233333	47.59	---	68.20	20.61	200.0	V	260.0	0
2827.700000	---	37.91	54.00	16.09	100.0	H	115.0	1
3496.900000	49.92	---	68.20	18.28	100.0	H	80.0	4
3948.633333	---	41.62	54.00	12.38	100.0	V	124.0	6
4457.300000	51.72	---	68.20	16.48	200.0	V	192.0	7
6872.766667	53.08	---	68.20	15.12	100.0	H	52.0	11
7359.266667	---	44.54	54.00	9.46	200.0	H	24.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

### 802.11ac (VHT20) CH36

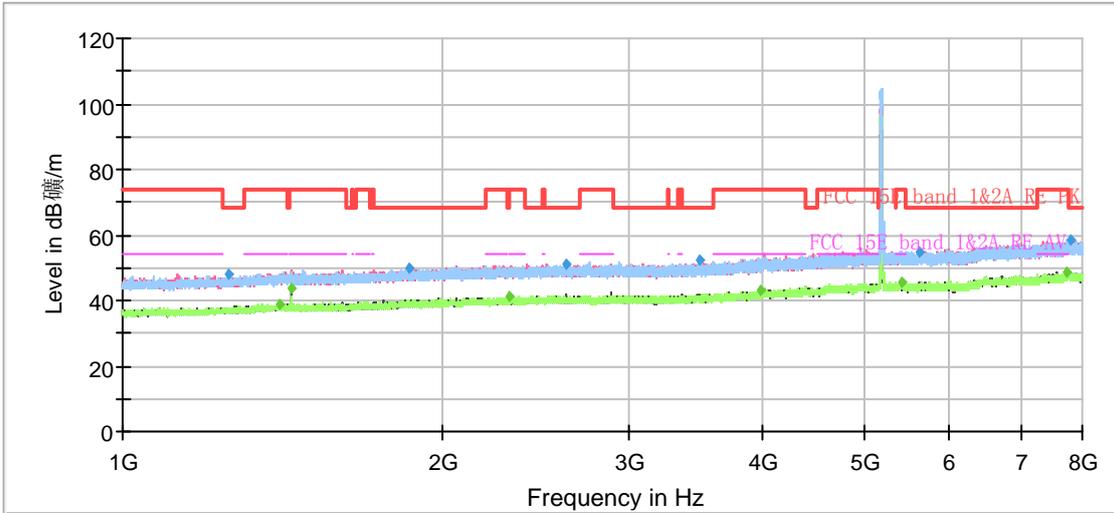

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

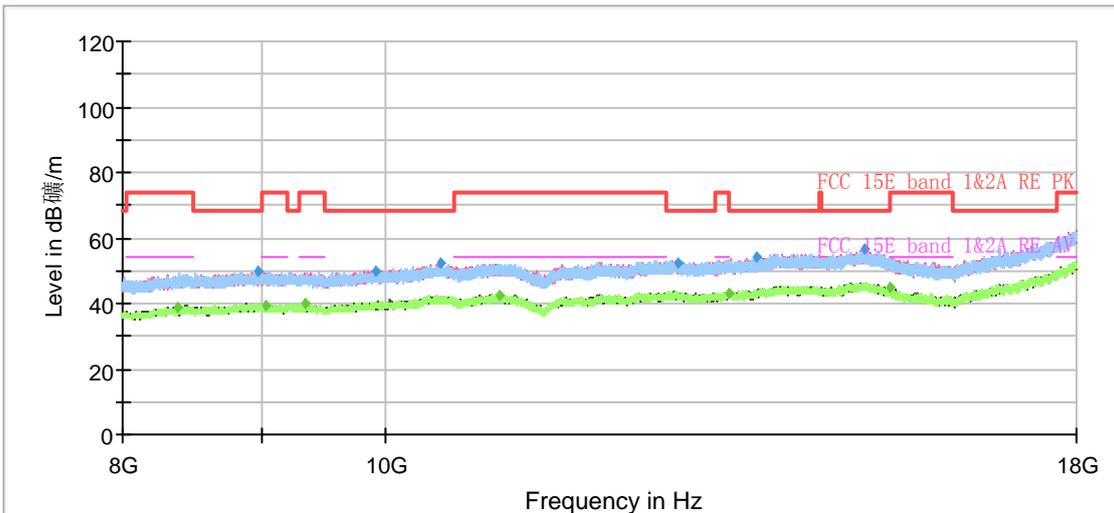


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1259.000000	47.89	---	68.20	20.31	100.0	V	0.0	-8
1402.500000	---	39.02	54.00	14.98	200.0	V	11.0	-7
1440.533333	---	43.97	54.00	10.03	200.0	V	0.0	-7
1862.866667	50.03	---	68.20	18.17	100.0	V	166.0	-5
2315.066667	---	41.35	54.00	12.65	200.0	H	0.0	-4
2617.466667	51.38	---	68.20	16.82	100.0	H	130.0	-4
3488.033333	52.08	---	68.20	16.12	100.0	V	193.0	-3
3988.300000	---	43.07	54.00	10.93	200.0	H	178.0	-1
5413.266667	---	45.66	54.00	8.34	100.0	V	166.0	3
5629.566667	54.94	---	68.20	13.26	200.0	V	104.0	3
7734.700000	---	47.43	54.00	6.57	100.0	V	38.0	7
7792.333333	58.24	---	68.20	9.96	200.0	V	158.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11ac (VHT20) CH40

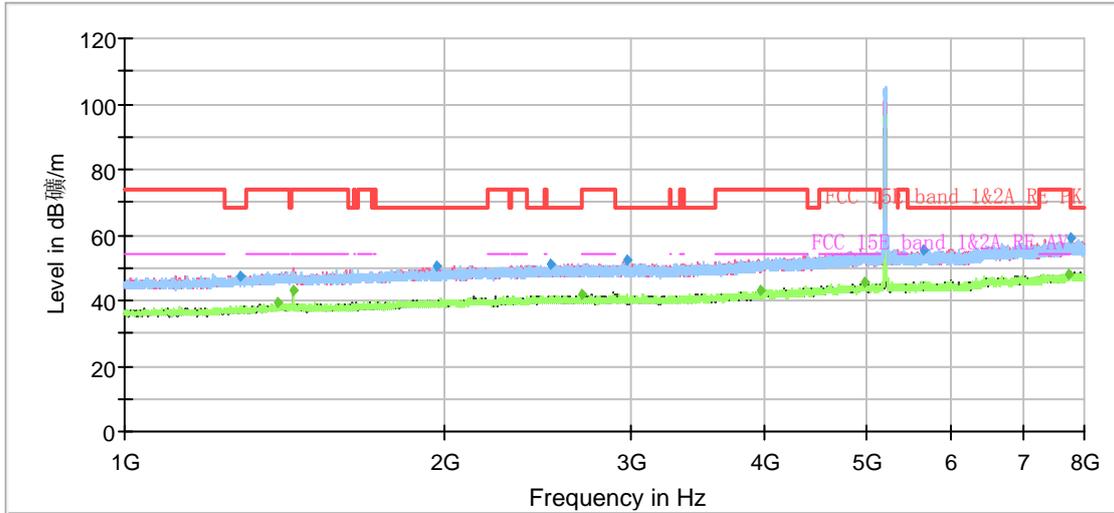

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

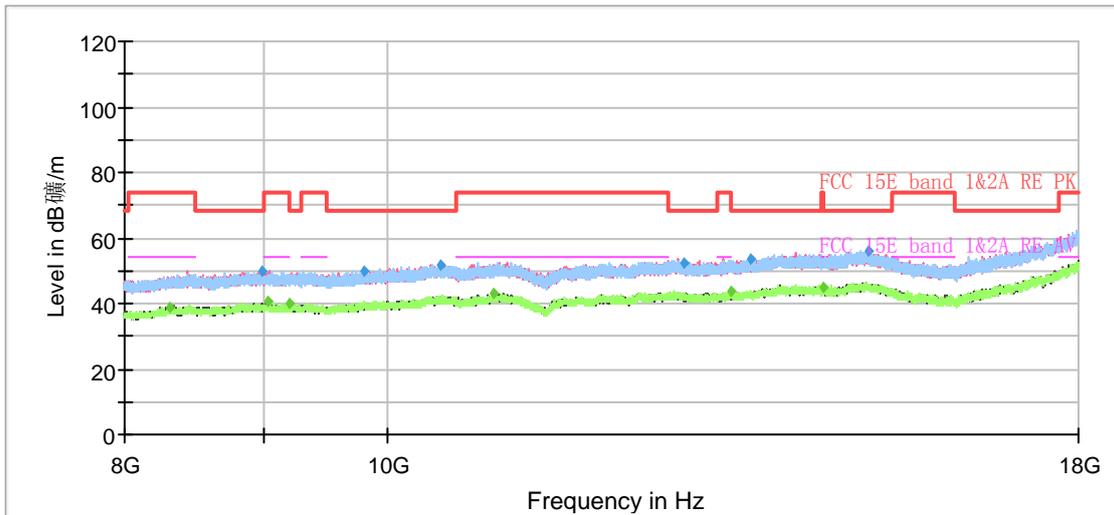

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1286.766667	47.63	---	68.20	20.57	200.0	H	122.0	-8
1391.766667	---	39.08	54.00	14.92	200.0	V	146.0	-7
1440.533333	---	43.13	54.00	10.87	200.0	V	350.0	-7
1968.566667	50.51	---	68.20	17.69	200.0	H	122.0	-5
2519.700000	51.15	---	68.20	17.05	200.0	H	189.0	-4
2695.400000	---	41.67	54.00	12.33	200.0	V	133.0	-4
2968.400000	52.02	---	68.20	16.18	100.0	H	28.0	-3
3958.433333	---	43.08	54.00	10.92	100.0	H	6.0	-1
4972.266667	---	45.37	54.00	8.63	100.0	H	0.0	2
5633.300000	55.09	---	68.20	13.11	200.0	V	11.0	3
7743.333333	---	47.80	54.00	6.20	200.0	H	176.0	7
7761.300000	59.05	---	68.20	9.15	100.0	H	4.0	7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11ac (VHT20) CH48

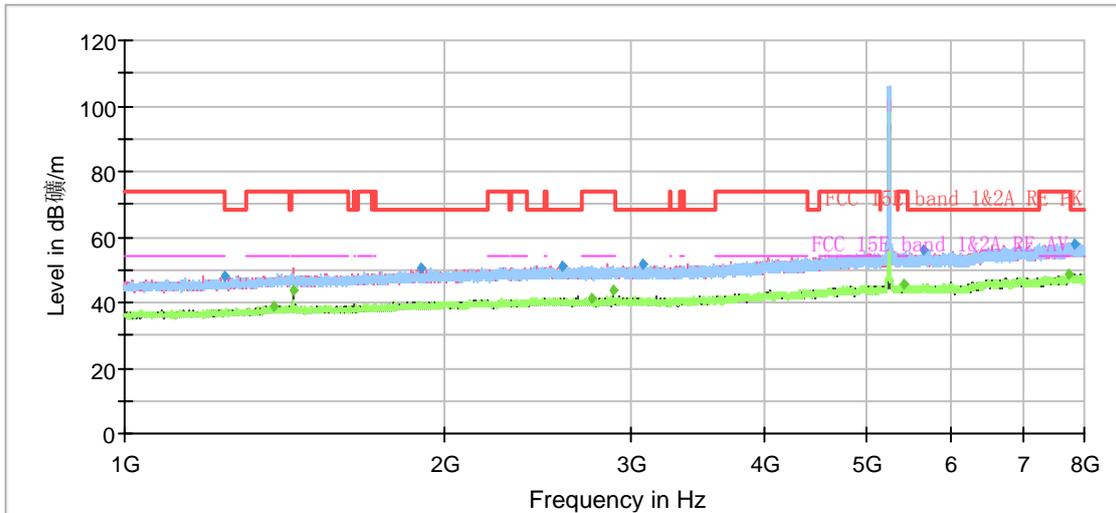

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

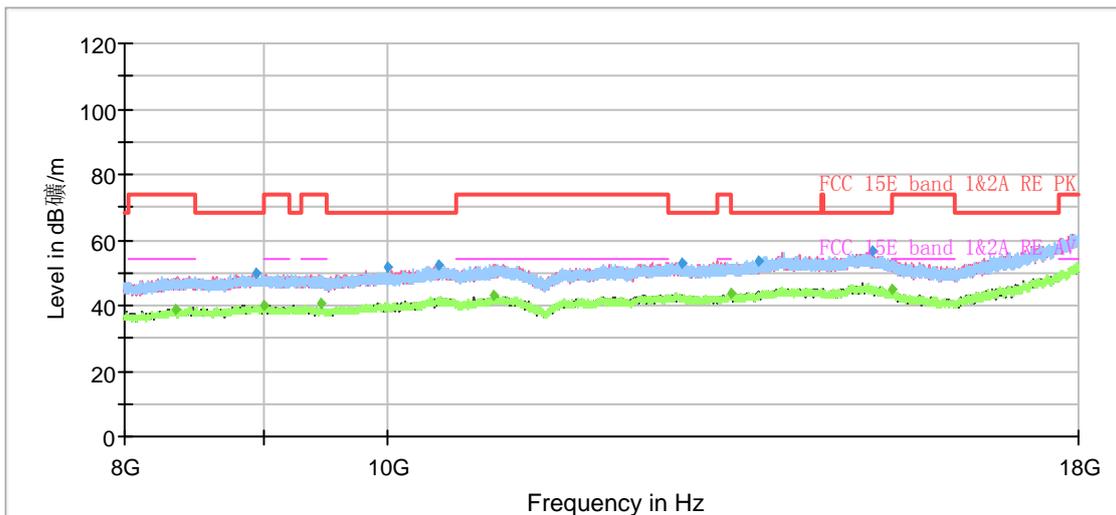


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1242.900000	48.17	---	68.20	20.03	200.0	H	320.0	-8
1379.166667	---	39.01	54.00	14.99	100.0	V	353.0	-7
1440.766667	---	43.73	54.00	10.27	200.0	V	0.0	-7
1897.400000	50.70	---	68.20	17.50	200.0	V	0.0	-5
2575.933333	51.00	---	68.20	17.20	100.0	V	175.0	-4
2748.600000	---	41.53	54.00	12.47	100.0	V	79.0	-4
2881.366667	---	43.49	54.00	10.51	100.0	V	307.0	-3
3068.733333	51.67	---	68.20	16.53	200.0	V	35.0	-3
5398.566667	---	45.53	54.00	8.47	200.0	V	238.0	3
5636.333333	55.85	---	68.20	12.35	200.0	H	135.0	3
7742.633333	---	47.44	54.00	6.56	200.0	V	238.0	7
7843.900000	57.99	---	68.20	10.21	200.0	V	224.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT20) CH52

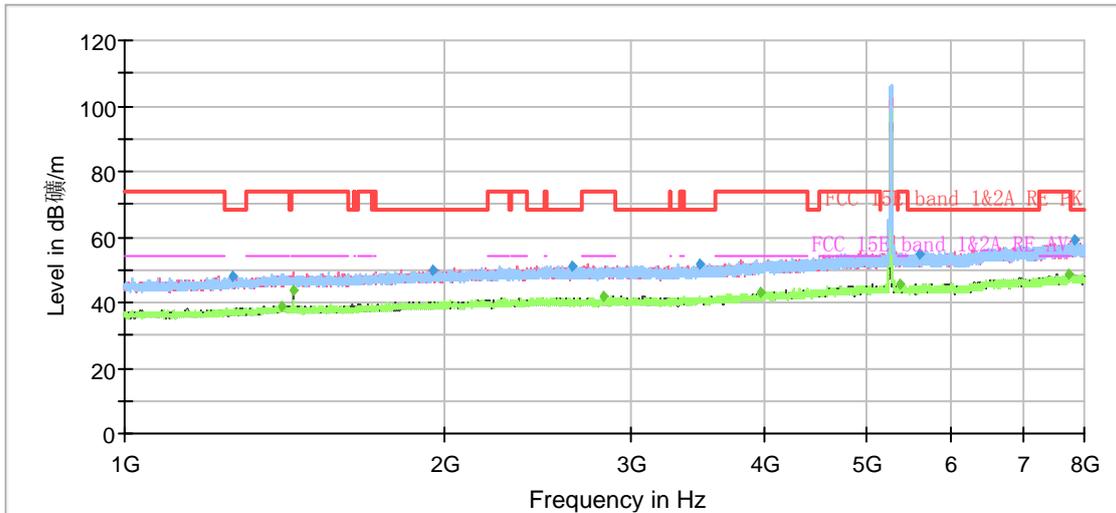

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

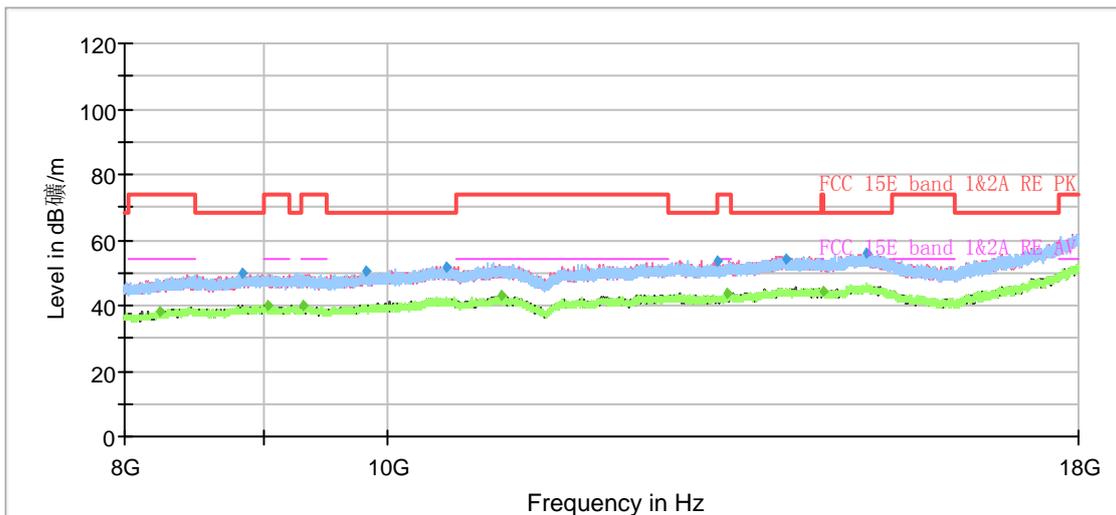


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1263.666667	47.94	---	68.20	20.26	200.0	V	91.0	-8
1405.533333	---	38.98	54.00	15.02	100.0	V	359.0	-7
1440.533333	---	43.44	54.00	10.56	200.0	V	3.0	-7
1953.400000	49.94	---	68.20	18.26	200.0	V	0.0	-5
2635.666667	51.18	---	68.20	17.02	100.0	V	298.0	-4
2826.533333	---	41.57	54.00	12.43	100.0	H	104.0	-3
3472.866667	51.63	---	68.20	16.57	100.0	H	294.0	-3
3957.966667	---	43.29	54.00	10.71	200.0	V	205.0	-1
5373.366667	---	45.43	54.00	8.57	100.0	V	64.0	3
5586.633333	54.99	---	68.20	13.21	200.0	H	261.0	3
7744.733333	---	47.60	54.00	6.40	200.0	H	194.0	7
7846.933333	58.89	---	68.20	9.31	100.0	H	211.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT20) CH60

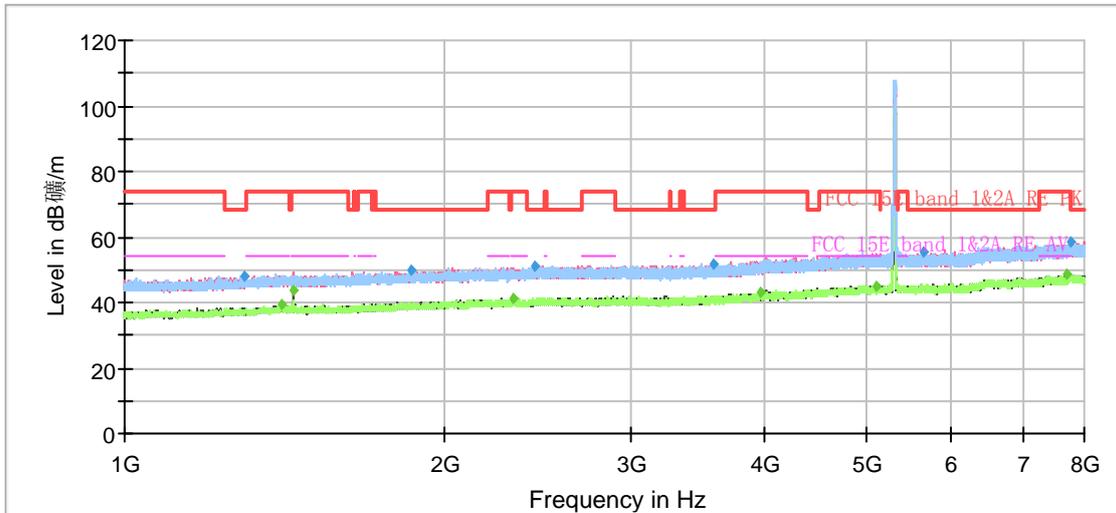

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

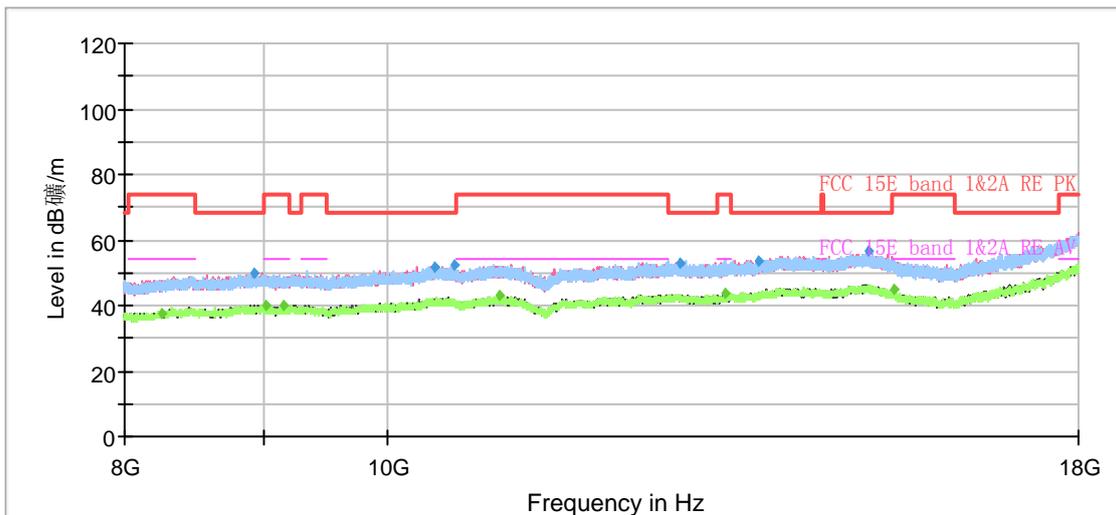


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1297.033333	47.96	---	68.20	20.24	100.0	H	15.0	-8
1403.433333	---	39.09	54.00	14.91	100.0	H	282.0	-7
1440.533333	---	43.73	54.00	10.27	200.0	V	2.0	-7
1862.166667	49.68	---	68.20	18.52	200.0	H	349.0	-5
2321.833333	---	41.32	54.00	12.68	100.0	V	227.0	-4
2428.000000	51.23	---	68.20	16.97	200.0	H	282.0	-4
3584.400000	51.60	---	68.20	16.60	100.0	V	188.0	-3
3971.733333	---	43.01	54.00	10.99	100.0	H	168.0	-1
5107.366667	---	45.14	54.00	8.86	100.0	H	49.0	2
5634.466667	55.55	---	68.20	12.65	100.0	H	254.0	3
7711.366667	---	47.36	54.00	6.64	200.0	V	114.0	7
7769.466667	58.71	---	68.20	9.49	100.0	H	61.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11ac (VHT20) CH64

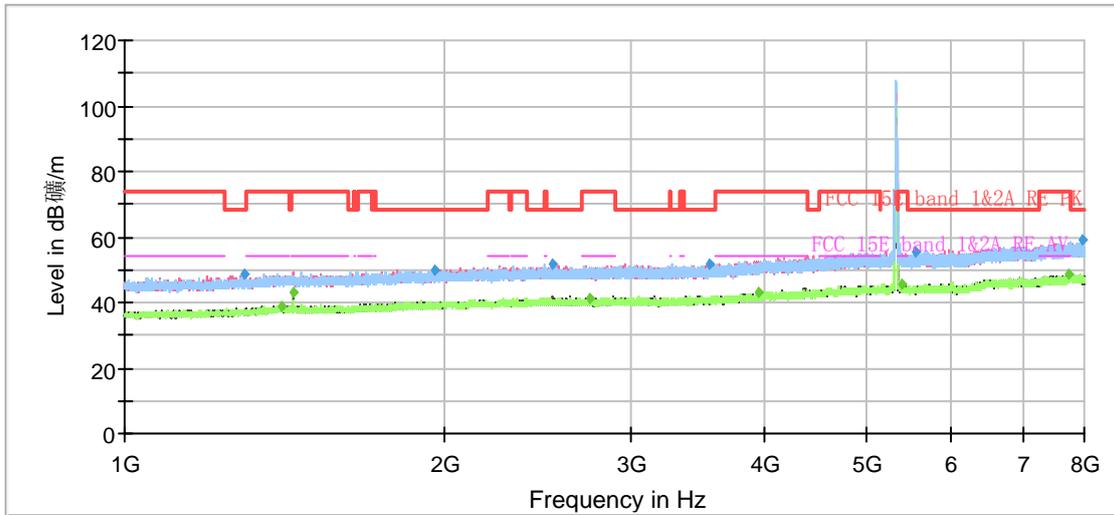

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

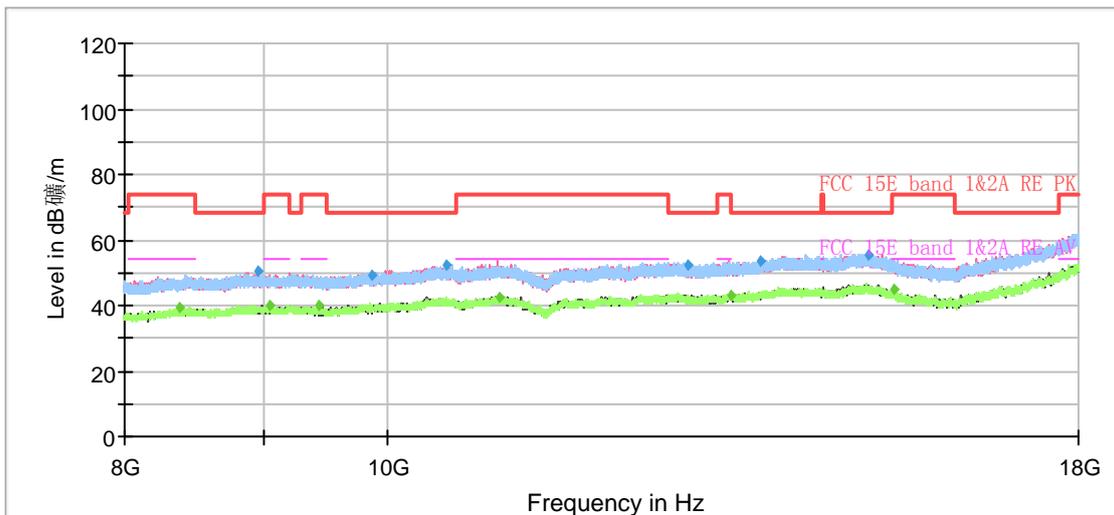


Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1297.033333	48.31	---	68.20	19.89	100.0	V	299.0	-8
1407.866667	---	38.94	54.00	15.06	100.0	V	259.0	-7
1440.766667	---	43.24	54.00	10.76	200.0	V	0.0	-7
1960.400000	50.05	---	68.20	18.15	100.0	V	325.0	-5
2530.900000	51.82	---	68.20	16.38	100.0	H	170.0	-4
2733.900000	---	41.36	54.00	12.64	200.0	V	91.0	-4
3551.033333	51.60	---	68.20	16.60	200.0	H	179.0	-3
3951.900000	---	43.01	54.00	10.99	100.0	H	118.0	-1
5390.866667	---	45.46	54.00	8.54	200.0	H	325.0	3
5542.300000	55.29	---	68.20	12.91	200.0	H	298.0	3
7733.300000	---	47.41	54.00	6.59	100.0	H	359.0	7
7957.766667	58.90	---	68.20	9.30	200.0	H	0.0	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11ac (VHT20) CH100

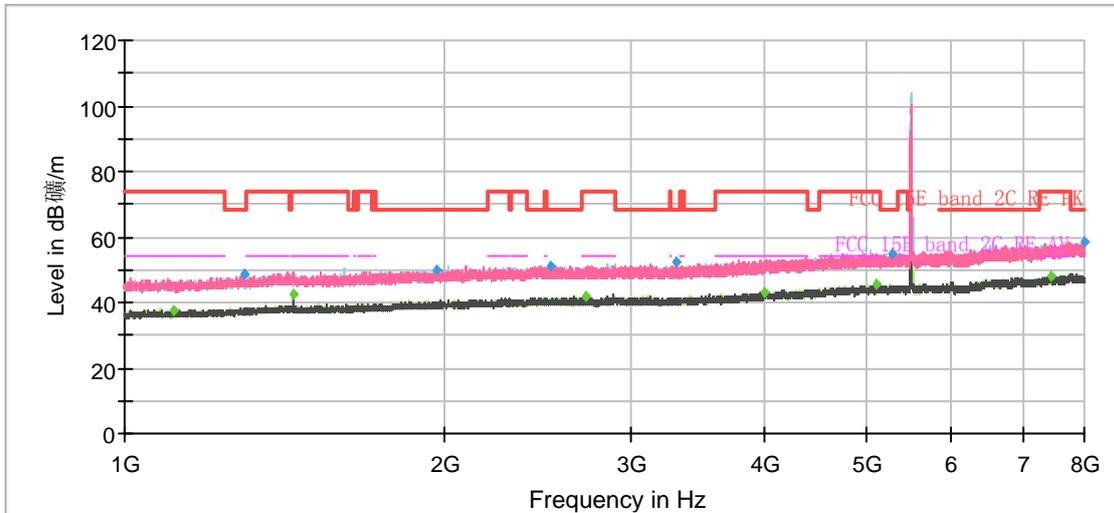

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

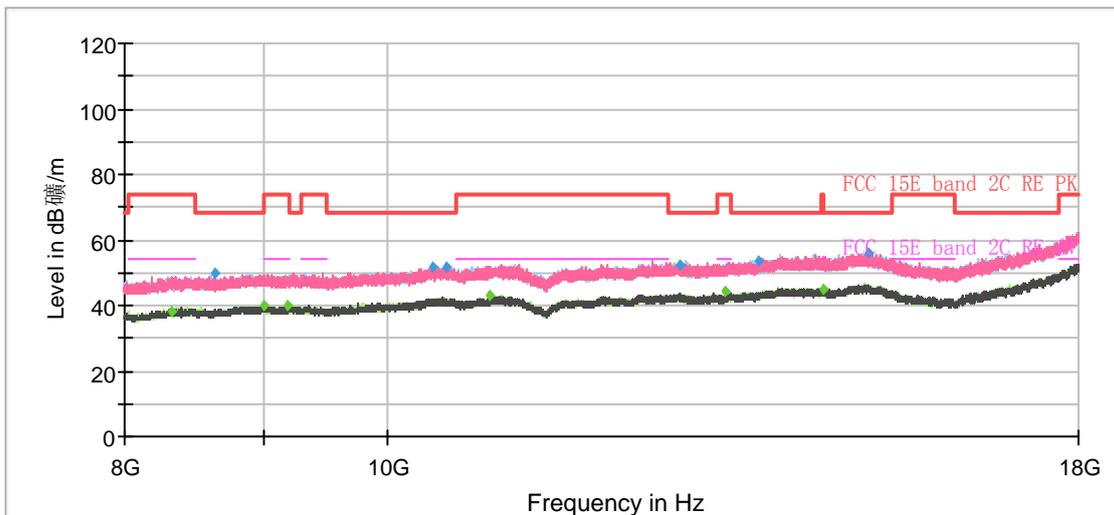


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1111.066667	---	37.55	54.00	16.45	100.0	V	225.0	-9
1295.166667	48.50	---	68.20	19.70	200.0	V	24.0	-8
1440.533333	---	42.40	54.00	11.60	200.0	V	0.0	-7
1970.200000	49.96	---	68.20	18.24	200.0	H	0.0	-5
2515.733333	51.11	---	68.20	17.09	100.0	V	130.0	-4
2722.000000	---	42.08	54.00	11.92	200.0	H	197.0	-4
3305.566667	52.16	---	68.20	16.04	200.0	V	108.0	-3
3998.800000	---	43.31	54.00	10.69	100.0	V	279.0	-1
5092.200000	---	45.24	54.00	8.76	100.0	V	157.0	2
5267.200000	54.96	---	68.20	13.24	200.0	V	167.0	2
7442.566667	---	47.90	54.00	6.10	200.0	H	0.0	7
7985.533333	58.26	---	68.20	9.94	100.0	V	10.0	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11ac (VHT20) CH116

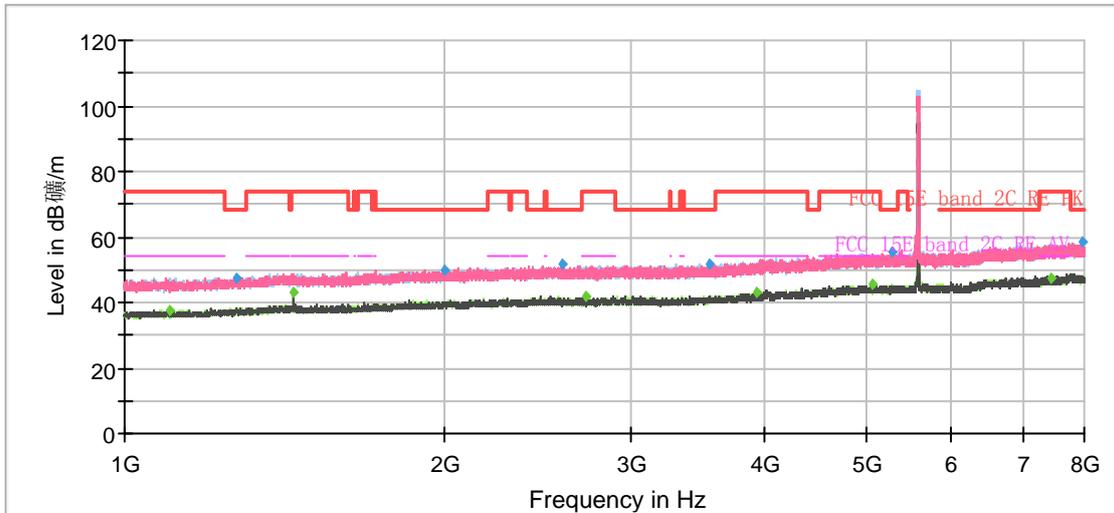

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

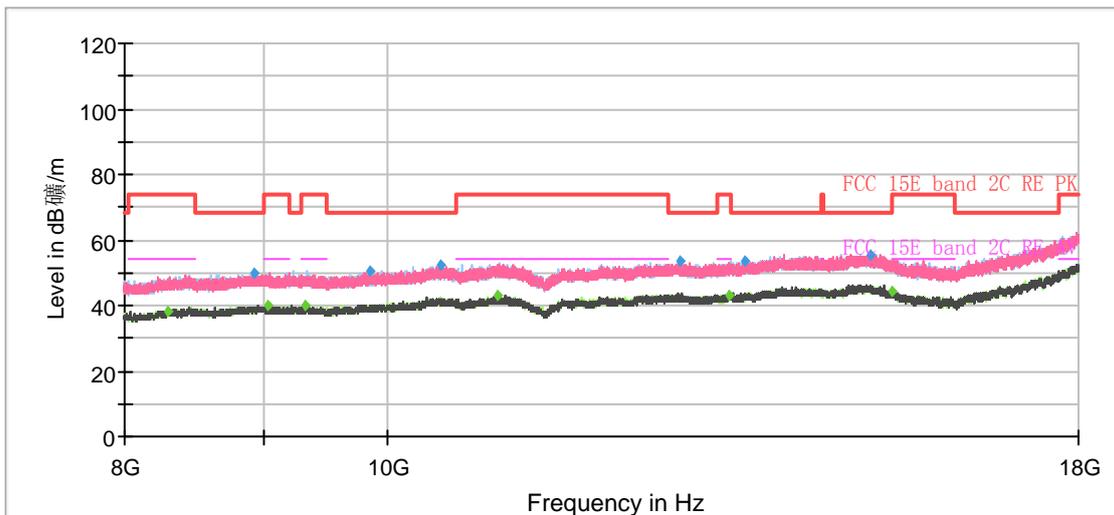


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1101.966667	---	37.25	54.00	16.75	100.0	H	312.0	-9
1276.966667	47.65	---	68.20	20.55	200.0	V	138.0	-8
1440.533333	---	43.12	54.00	10.88	200.0	V	0.0	-7
1999.600000	49.89	---	68.20	18.31	200.0	H	0.0	-5
2582.700000	51.60	---	68.20	16.60	200.0	V	270.0	-4
2718.966667	---	41.69	54.00	12.31	100.0	H	206.0	-4
3555.466667	51.73	---	68.20	16.47	200.0	V	356.0	-3
3939.766667	---	43.27	54.00	10.73	100.0	V	130.0	-2
5044.833333	---	45.47	54.00	8.53	200.0	H	15.0	2
5280.266667	55.25	---	68.20	12.95	100.0	H	153.0	2
7446.300000	---	47.54	54.00	6.46	100.0	H	0.0	7
7963.133333	58.16	---	68.20	10.04	200.0	V	54.0	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT20) CH140

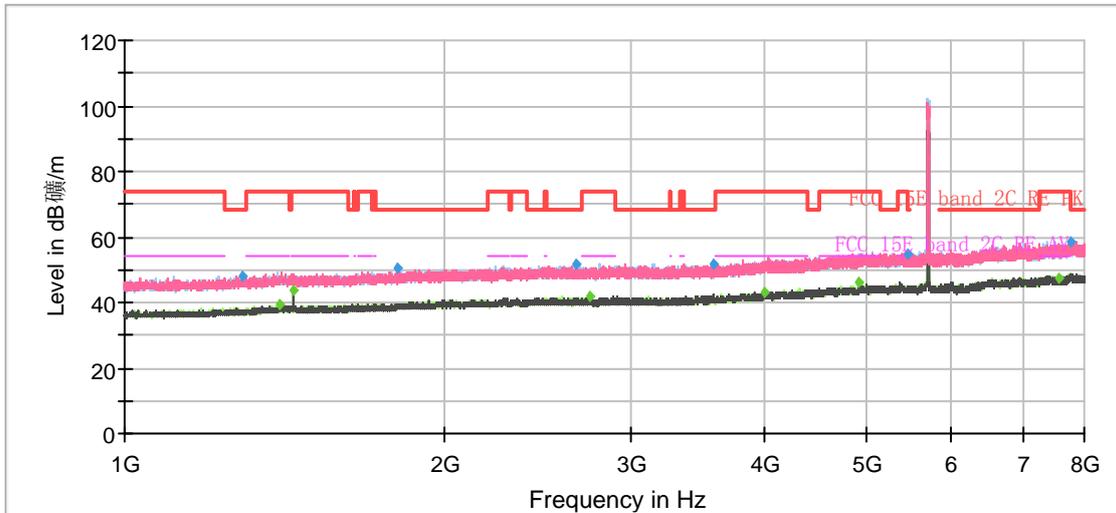

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

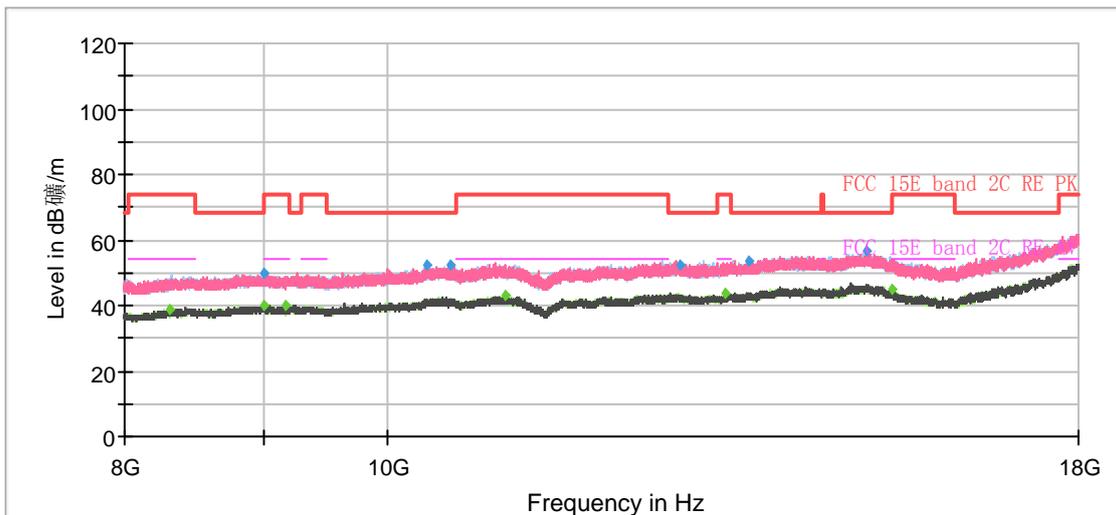


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1288.866667	47.77	---	68.20	20.43	200.0	V	358.0	-8
1400.633333	---	39.14	54.00	14.86	100.0	V	112.0	-7
1440.533333	---	43.54	54.00	10.46	200.0	V	0.0	-7
1809.200000	50.20	---	68.20	18.00	200.0	V	356.0	-6
2664.366667	51.48	---	68.20	16.72	100.0	V	8.0	-3
2736.466667	---	41.77	54.00	12.23	100.0	V	1.0	-4
3585.800000	51.86	---	68.20	16.34	100.0	V	45.0	-3
3998.800000	---	43.33	54.00	10.67	200.0	H	0.0	-1
4906.700000	---	45.98	54.00	8.02	200.0	V	270.0	2
5465.300000	55.00	---	68.20	13.20	200.0	H	0.0	3
7580.700000	---	47.41	54.00	6.59	200.0	H	60.0	7
7765.966667	58.43	---	68.20	9.77	200.0	V	356.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT20) CH149

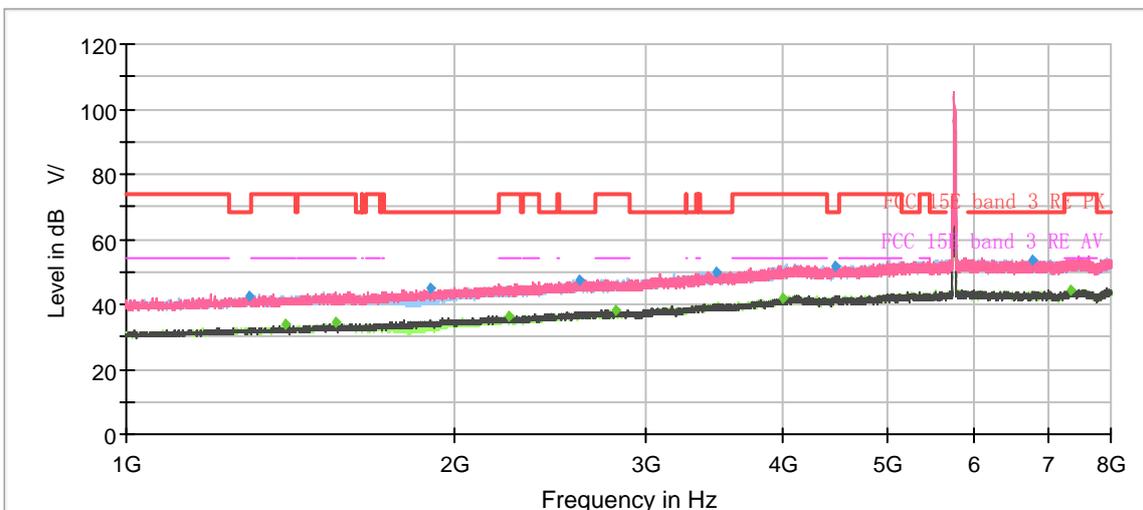

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

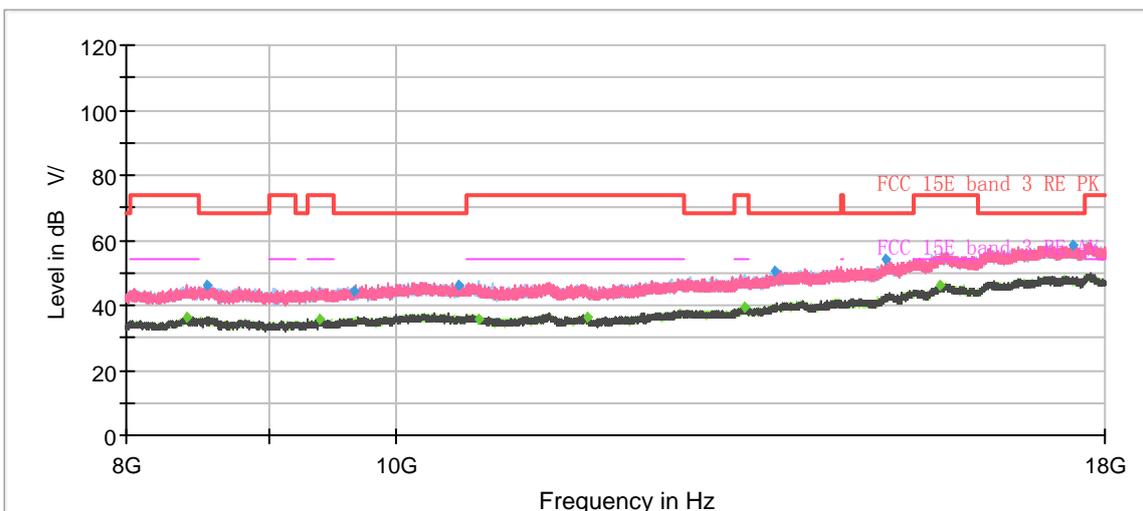


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1293.766667	42.50	---	68.20	25.70	100.0	H	212.0	-7
1401.100000	---	33.79	54.00	20.21	200.0	V	239.0	-6
1554.166667	---	34.21	54.00	19.79	200.0	V	302.0	-5
1903.700000	44.93	---	68.20	23.27	100.0	V	154.0	-4
2239.000000	---	36.45	54.00	17.55	100.0	V	17.0	-2
2604.866667	47.49	---	68.20	20.71	200.0	H	211.0	0
2807.633333	---	38.30	54.00	15.70	200.0	V	54.0	1
3470.766667	50.08	---	68.20	18.12	200.0	H	0.0	4
3997.633333	---	41.58	54.00	12.42	200.0	H	120.0	6
4460.333333	51.47	---	68.20	16.73	100.0	V	182.0	7
6777.333333	53.46	---	68.20	14.74	200.0	H	79.0	10
7342.933333	---	44.53	54.00	9.47	100.0	V	278.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT20) CH157

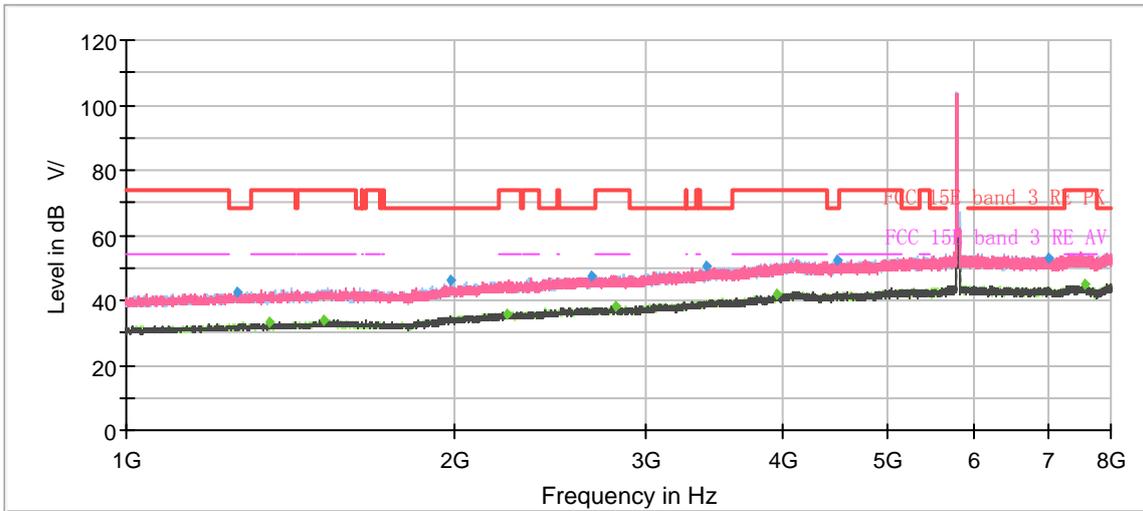

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

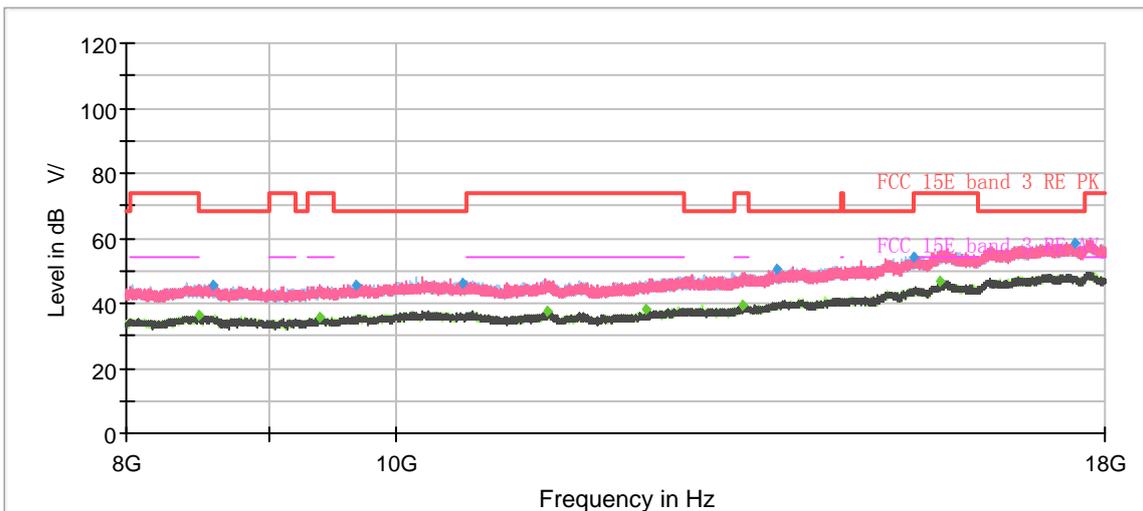

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1261.800000	42.37	---	68.20	25.83	200.0	H	340.0	-7
1353.033333	---	33.12	54.00	20.88	200.0	H	163.0	-7
1519.633333	---	34.03	54.00	19.97	100.0	V	271.0	-5
1985.600000	46.19	---	68.20	22.01	200.0	V	0.0	-3
2232.700000	---	35.89	54.00	18.11	200.0	H	0.0	-2
2674.866667	47.48	---	68.20	20.72	200.0	V	249.0	0
2809.500000	---	37.89	54.00	16.11	100.0	H	225.0	1
3410.333333	50.30	---	68.20	17.90	200.0	V	152.0	4
3952.600000	---	41.60	54.00	12.40	200.0	V	61.0	6
4479.466667	52.41	---	68.20	15.79	200.0	H	286.0	7
7020.466667	53.13	---	68.20	15.07	100.0	H	43.0	11
7558.766667	---	44.62	54.00	9.38	200.0	H	258.0	11


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 802.11ac (VHT20) CH165

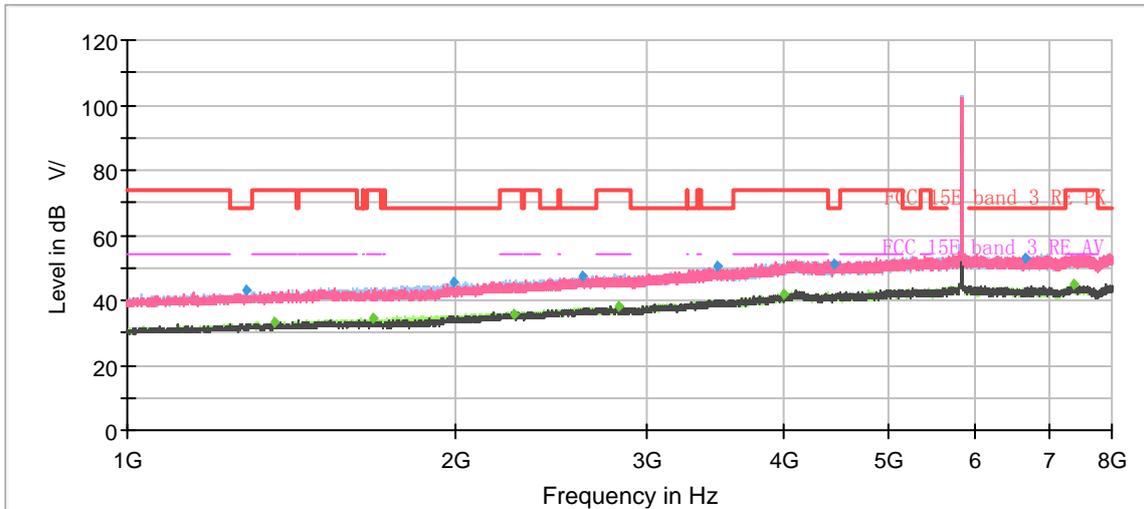

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

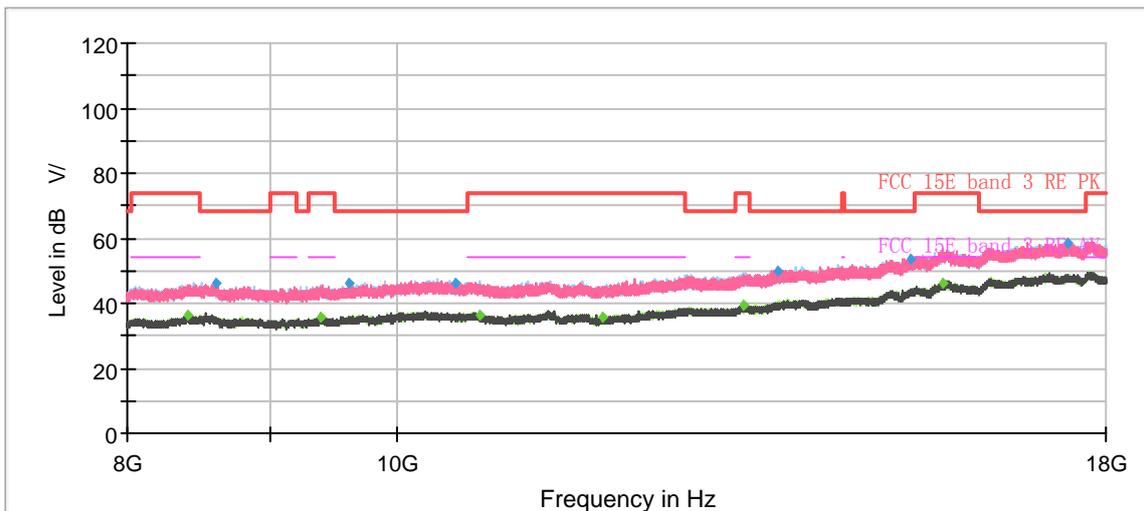


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1284.900000	43.37	---	68.20	24.83	100.0	H	113.0	-7
1364.933333	---	33.26	54.00	20.74	100.0	V	151.0	-7
1678.300000	---	34.17	54.00	19.83	100.0	H	140.0	-5
1988.166667	45.24	---	68.20	22.97	100.0	H	343.0	-3
2258.833333	---	35.71	54.00	18.29	100.0	H	66.0	-2
2614.200000	47.54	---	68.20	20.66	200.0	V	170.0	0
2827.466667	---	37.92	54.00	16.08	100.0	V	355.0	1
3469.366667	50.47	---	68.20	17.73	100.0	V	286.0	4
3998.800000	---	42.05	54.00	11.95	100.0	H	113.0	6
4454.266667	51.22	---	68.20	16.98	200.0	H	272.0	7
6660.900000	53.20	---	68.20	15.00	100.0	H	147.0	10
7383.300000	---	45.02	54.00	8.98	100.0	H	133.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT40) CH38

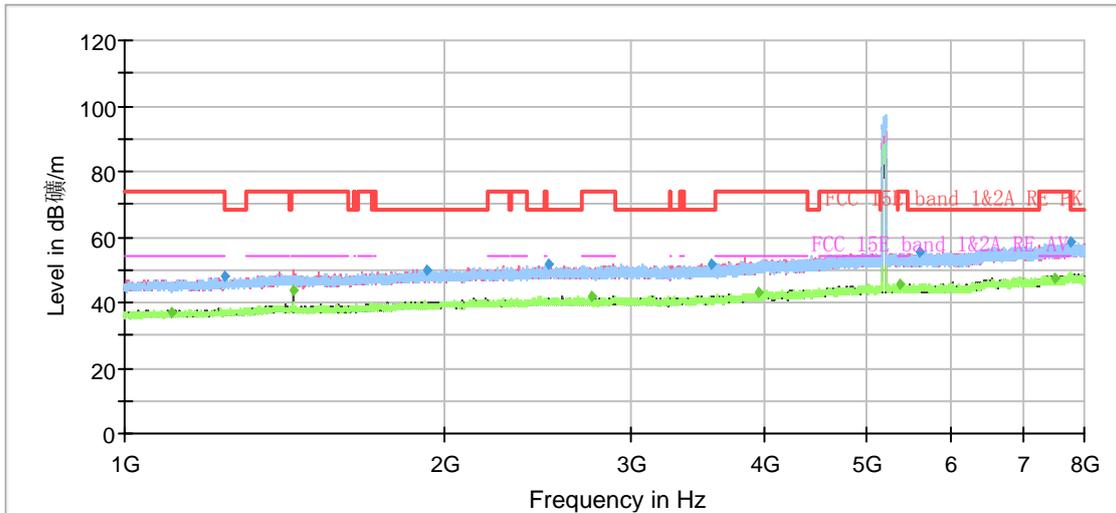

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

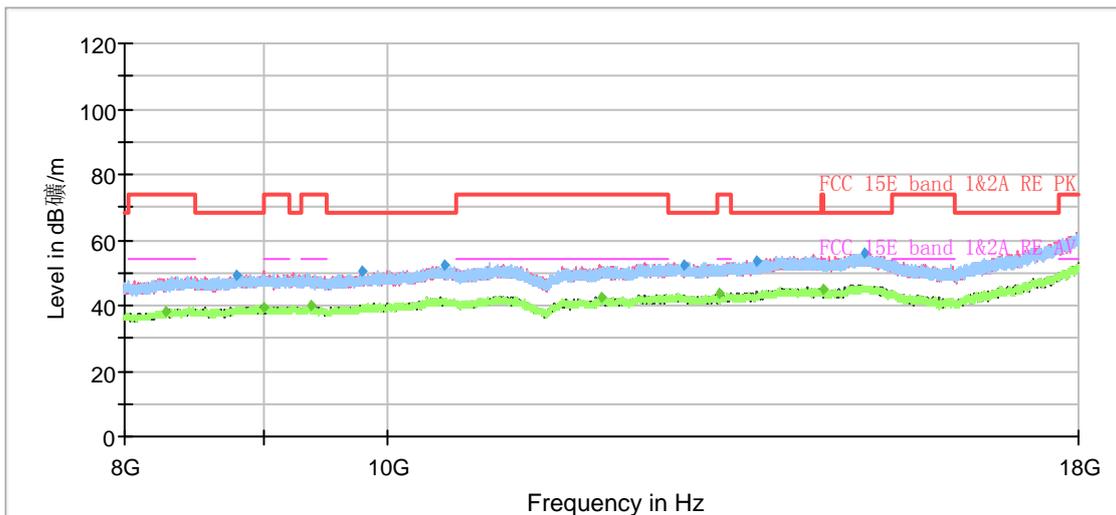


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1108.966667	---	37.20	54.00	16.80	100.0	V	122.0	-9
1242.666667	47.85	---	68.20	20.35	100.0	V	229.0	-8
1440.533333	---	43.91	54.00	10.09	200.0	V	23.0	-7
1923.766667	50.15	---	68.20	18.05	100.0	H	17.0	-5
2501.033333	51.45	---	68.20	16.75	200.0	V	248.0	-4
2751.633333	---	41.71	54.00	12.29	200.0	V	235.0	-4
3571.333333	51.89	---	68.20	16.31	100.0	V	322.0	-3
3941.166667	---	43.14	54.00	10.86	200.0	H	357.0	-2
5373.600000	---	45.29	54.00	8.71	200.0	V	114.0	3
5589.666667	55.18	---	68.20	13.02	100.0	H	63.0	3
7498.800000	---	47.47	54.00	6.53	100.0	V	202.0	7
7755.700000	58.19	---	68.20	10.01	100.0	V	355.0	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT40) CH46

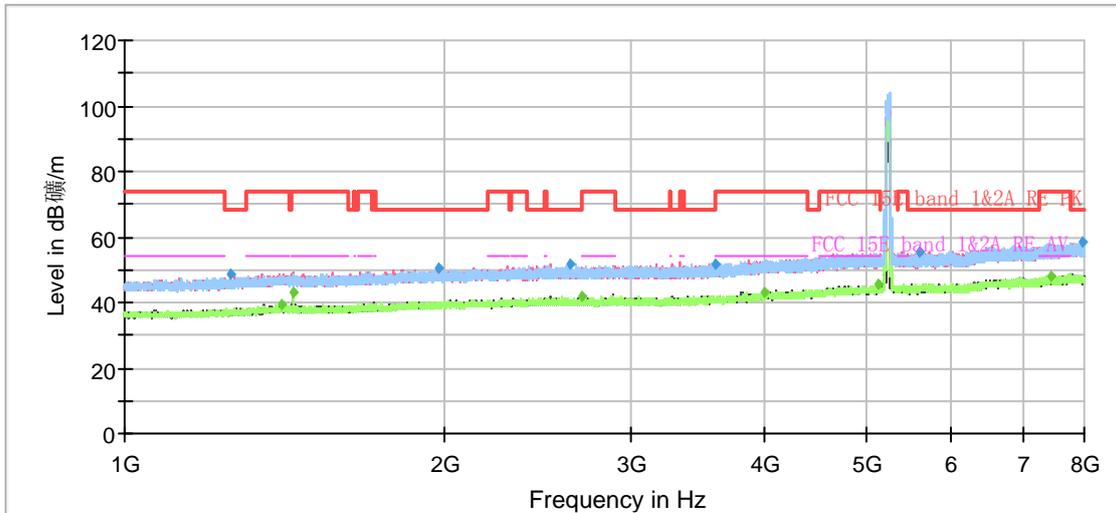

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

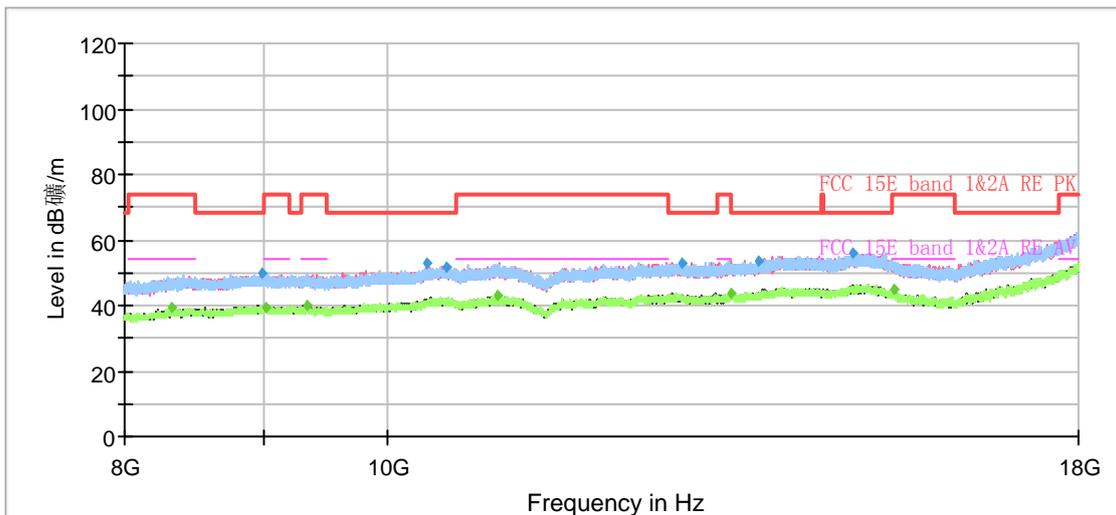

Radiates Emission from 8GHz to 18GHz