

FCC Radio Test Report

FCC ID: QISAGS-L03

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1705C003
Equipment : Huawei MediaPad T3 10 (MediaPad T3 10 for short)
Model Name : AGS-L03
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : May 02, 2017
Date of Test : May 02, 2017 ~ May 19, 2017
Issued Date : May 22, 2017
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

Page

1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
3.5 DESCRIPTION OF SUPPORT UNITS	15
4 . EMC EMISSION TEST	16
4.1 CONDUCTED EMISSION MEASUREMENT	16
4.1.1 POWER LINE CONDUCTED EMISSION	16
4.1.2 TEST PROCEDURE	16
4.1.3 DEVIATION FROM TEST STANDARD	16
4.1.4 TEST SETUP	17
4.1.5 EUT OPERATING CONDITIONS	17
4.1.6 EUT TEST CONDITIONS	17
4.1.7 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS	18
4.2.2 TEST PROCEDURE	19
4.2.3 DEVIATION FROM TEST STANDARD	19
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	21
4.2.6 EUT TEST CONDITIONS	21
4.2.7 TEST RESULTS (9K TO 30MHz)	22
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	22
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	22
5 . 26dB SPECTRUM BANDWIDTH	23
5.1 APPLIED PROCEDURES / LIMIT	23
5.1.1 TEST PROCEDURE	23
5.1.2 DEVIATION FROM STANDARD	23
5.1.3 TEST SETUP	23
5.1.4 EUT OPERATION CONDITIONS	23
5.1.5 EUT TEST CONDITIONS	24
5.1.6 TEST RESULTS	24
6 . MAXIMUM CONDUCTED OUTPUT POWER	25

Table of Contents

Page

6.1 APPLIED PROCEDURES / LIMIT	25
6.1.1 TEST PROCEDURE	25
6.1.2 DEVIATION FROM STANDARD	26
6.1.3 TEST SETUP	26
6.1.4 EUT OPERATION CONDITIONS	26
6.1.5 EUT TEST CONDITIONS	26
6.1.6 TEST RESULTS	26
7 . POWER SPECTRAL DENSITY TEST	27
7.1 APPLIED PROCEDURES / LIMIT	27
8.1.1 TEST PROCEDURE	27
7.1.1 DEVIATION FROM STANDARD	28
7.1.2 TEST SETUP	28
7.1.3 EUT OPERATION CONDITIONS	28
7.1.4 EUT TEST CONDITIONS	28
7.1.5 TEST RESULTS	28
8 . FREQUENCY STABILITY MEASUREMENT	29
8.1 APPLIED PROCEDURES / LIMIT	29
8.1.1 TEST PROCEDURE	29
8.1.2 DEVIATION FROM STANDARD	29
8.1.3 TEST SETUP	30
8.1.4 EUT OPERATION CONDITIONS	30
8.1.5 EUT TEST CONDITIONS	30
8.1.6 TEST RESULTS	30
9 . MEASUREMENT INSTRUMENTS LIST	31
ATTACHMENT A - CONDUCTED EMISSION	33
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	40
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	53
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	102
ATTACHMENT E - BANDWIDTH	346
ATTACHMENT F - MAXIMUM OUTPUT POWER	371
ATTACHMENT H - POWER SPECTRAL DENSITY	376
ATTACHMENT H - FREQUENCY STABILITY	401

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-4-1705C003	Original Issue.	May 22, 2017

1. CERTIFICATION

Equipment : Huawei MediaPad T3 10 (MediaPad T3 10 for short)
Brand Name : HUAWEI
Model Name : AGS-L03
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : May 02, 2017 ~ May 19, 2017
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-4-1705C003) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the RLAN 5G Band part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	1.94

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz~30MHz	V	3.79
		9kHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.60
		200MHz ~ 1,000MHz	V	3.86
		200MHz ~ 1,000MHz	H	3.94
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	
Brand Name	HUAWEI	
Model Name	AGS-L03	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	300Mbps
Output Power	Output Power (Max.)for UNII-1	802.11a: 16.87dBm 802.11n (20M): 16.85dBm 802.11n (40M): 17.39dBm
	Output Power (Max.)for UNII-2A	802.11a: 17.23dBm 802.11n (20M): 17.16dBm 802.11n (40M): 17.50dBm
	Output Power (Max.)for UNII-2C	802.11a: 17.18dBm 802.11n (20M): 17.21dBm 802.11n (40M): 17.37dBm
	Output Power (Max.)for UNII-3 (1TX)	802.11a: 17.51dBm 802.11n (20M): 17.56dBm 802.11n (40M): 17.56dBm
Power Source	#1 DC voltage supplied from adapter. #2 Supplied from battery. #3 Supplied from USB port.	
Power Rating	#1 100-240V~ 50/60Hz 0.2A #2 DC 3.8V 4650mAh #2 DC 5V 1A	
HW Version	SH1AGSL09M	
SW Version	AGS-L03C331B005-log	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List:

UNII-1 802.11a, 802.11n (20M)		UNII-1 802.11n (40M)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

UNII-2A 802.11a, 802.11n (20M)		UNII-2A 802.11n (40M)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270
56	5280	62	5310
60	5300		
64	5320		

UNII-2C 802.11a, 802.11n (20M)		UNII-2C 802.11n (40M)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510
104	5520	110	5550
108	5540	118	5590
112	5560	126	5630
116	5580	134	5670
132	5660		
136	5680		
140	5700		

UNII-3 802.11a, 802.11n (20M)		UNII-3 802.11n (40M)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

3. The EUT contains following accessory devices:

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB3080G1EBC/
	Harbin Coslight Power Co.,Ltd.	HB3080G1EBW
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	22040150
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	22040150
	Goer Tek Inc	22040150
USB Cable	Shenzhen Luxshare Precision Industry Co.,Ltd.	L99U2017-CS-H
	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC304-DH
	HONGLIN TECHNOLOGY CO.,LTD	130-26988
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD.	HW-050100U01
	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.	HW-050100A01 HW-050100E01
	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100B01

4. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	1

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 5	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 6	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 7	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 8	TX N20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 9	TX N40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 10	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 12	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 13	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 13	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 5	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 6	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 7	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 8	TX N20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 9	TX N40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 10	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 12	TX N40 Mode / CH151,CH159 (UNII-3)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product


UNII-1			
Test Software Version	QRCT		
Frequency (MHz)	5180	5200	5240
A Mode	16	16	16
Frequency (MHz)	5180	5200	5240
N20 Mode	16	16	16
Frequency (MHz)	5190	5230	
N40 Mode	16	16	

UNII-2A			
Test Software Version	QRCT		
Frequency (MHz)	5260	5300	5320
A Mode	16	16	16
Frequency (MHz)	5260	5300	5320
N20 Mode	16	16	16
Frequency (MHz)	5270	5310	
N40 Mode	16	16	

UNII-2C			
Test Software Version	QRCT		
Frequency (MHz)	5500	5580	5700
A Mode	16	16	16
Frequency (MHz)	5500	5580	5700
N20 Mode	16	16	16
Frequency (MHz)	5510	5550	5670
N40 Mode	16	16	16

UNII-3			
Test Software Version	QRCT		
Frequency (MHz)	5745	5785	5825
A Mode	16	16	16
Frequency (MHz)	5745	5785	5825
N20 Mode	16	16	16
Frequency (MHz)	5755	5795	
N40 Mode	16	16	

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

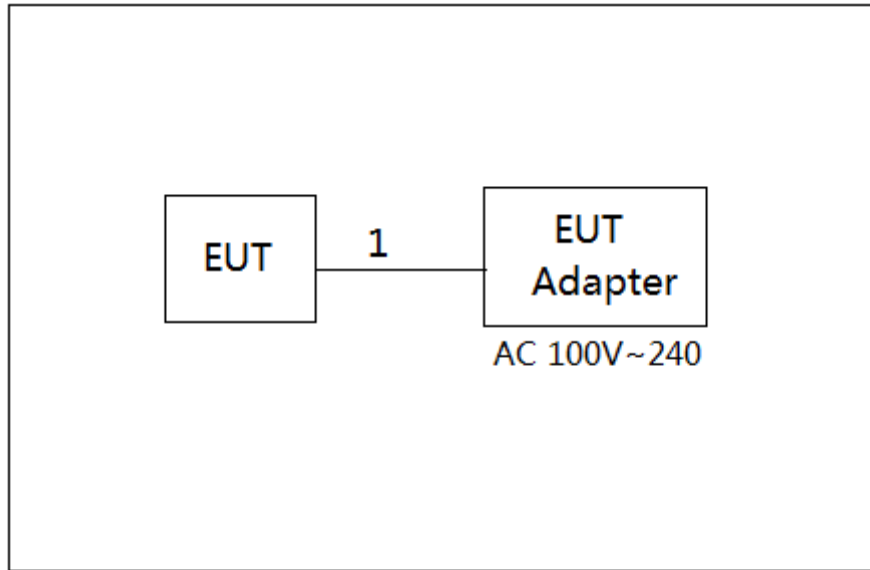

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

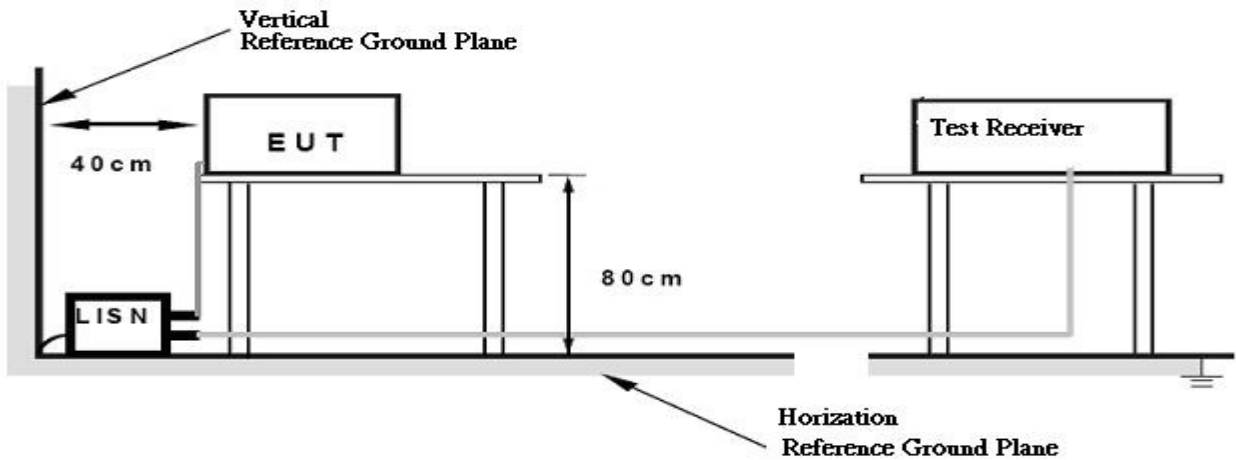

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequencies (MHz)	EIRP Limit (dBm)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27(Note 2)	68.3	74.3 (Note 3)
	10(Note 2)	105.3	111.3(Note 3)
	15.6(Note 2)	110.9	116.9(Note 3)
	27(Note 2)	122.3	128.3(Note 3)

Note:

- The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)
- According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

3. $20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6\text{dB}$.

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

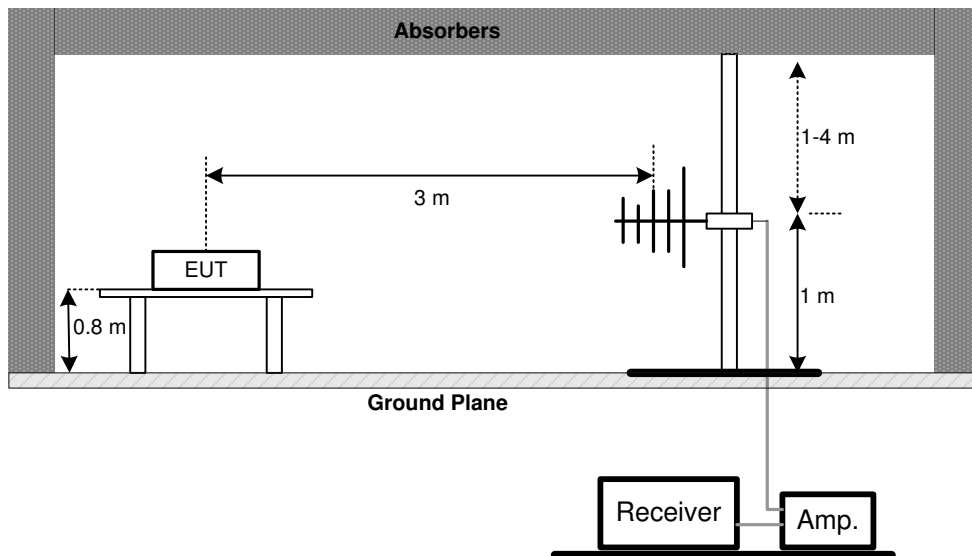


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz


Band edge

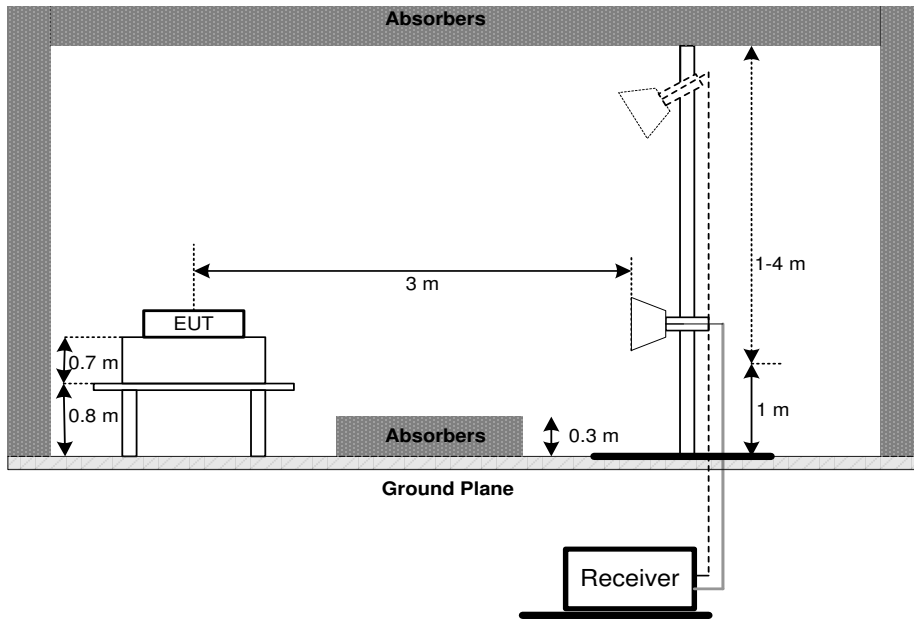

Harmonic

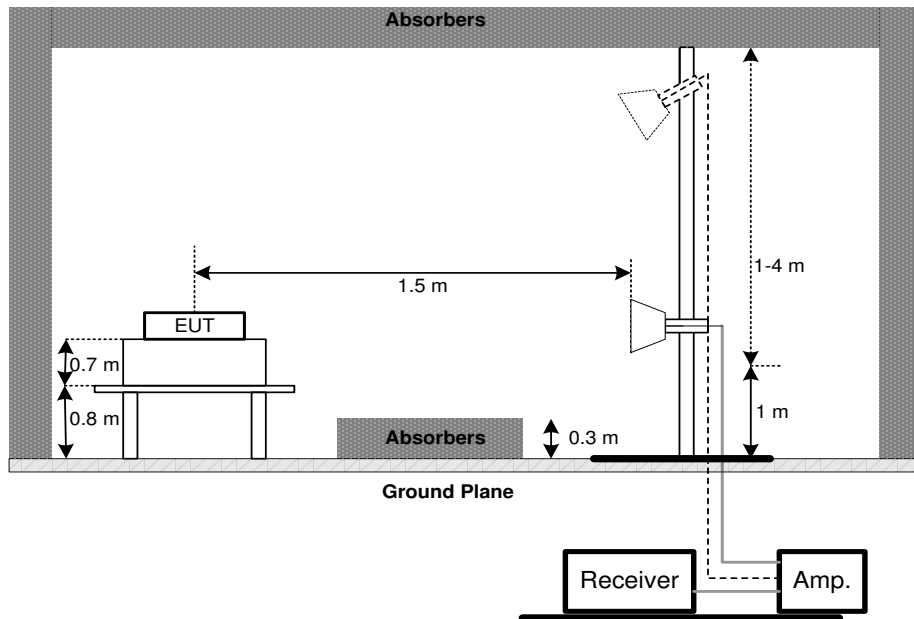

(C) Radiated emissions below 30MHz

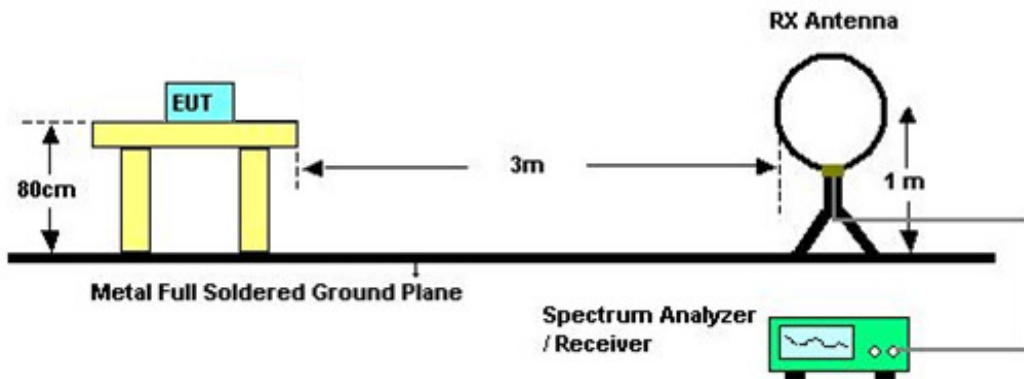

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	26 dB Bandwidth	5250-5350	PASS
	26 dB Bandwidth	5470-5725	PASS
	Minimum 500kHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz(Bandwidth 20MHz) 1MHz(Bandwidth 40MHz and 80MHz)
VBW	1MHz(Bandwidth 20MHz) 3MHz(Bandwidth 40MHz and 80MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm)	5150-5250	PASS
	250mW (24dBm)	5250-5350	PASS
	250mW (24dBm)	5470-5725	PASS
	1 Watt (30dBm)	5725-5850	PASS

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

- c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250	PASS
	11dBm/MHz	5250-5350	PASS
	11dBm/MHz	5470-5725	PASS
	30dBm/500kHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01r02, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

7.1.1 DEVIATION FROM STANDARD

No deviation.

7.1.2 TEST SETUP



7.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.4 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Attachment H.

8. FREQUENCY STABILITY MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	Specified in the user's manual	5150-5250	PASS
		5250-5350	PASS
		5470-5725	PASS
		5725-5850	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is 0°C~35°C.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

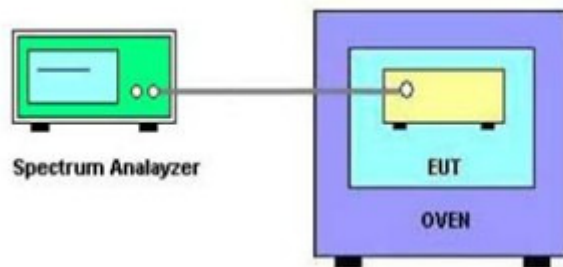

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment I.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9KHz-30 MHz)(5m)	N/A	Mar. 07, 2018
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
4	Cable	emci	LMR-400(30MH z-1GHz) (8m+5m)	N/A	Jun. 27, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 26, 2018
8	Amplifier	Agilent	8449B	3008A02274	Feb. 22, 2018
9	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz -26.5GHz)	C-68	Jun. 26, 2017
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 22, 2018
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Mar. 26, 2018
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Mar. 26, 2018

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017


Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May 21, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX MODE(Adapter: PHITEK)

Line

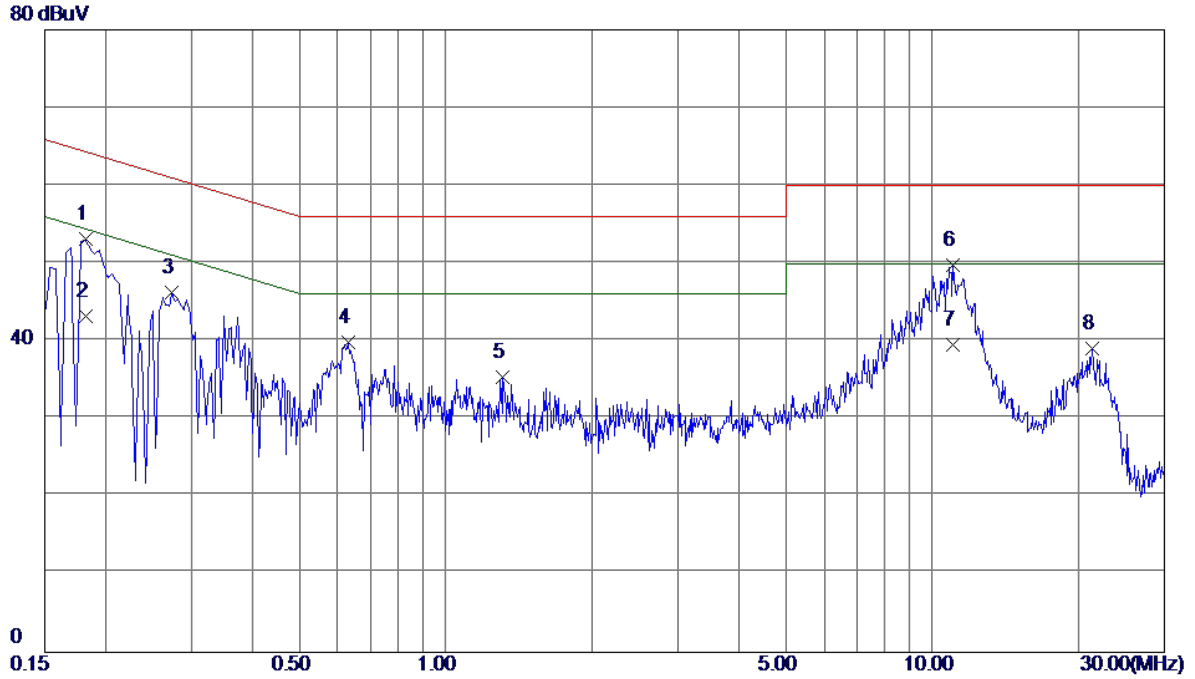


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1819	43.38	9.73	53.11	64.40	-11.29	Peak	
2	0.1819	33.50	9.73	43.23	54.40	-11.17	AVG	
3	0.2740	36.52	9.72	46.24	61.00	-14.76	Peak	
4	0.6300	30.15	9.76	39.91	56.00	-16.09	Peak	
5	1.3099	25.63	9.80	35.43	56.00	-20.57	Peak	
6 *	11.0420	39.61	10.09	49.70	60.00	-10.30	Peak	
7	11.0420	29.40	10.09	39.49	50.00	-10.51	AVG	
8	21.3460	28.72	10.29	39.01	60.00	-20.99	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE(Adapter: PHITEK)

Neutral

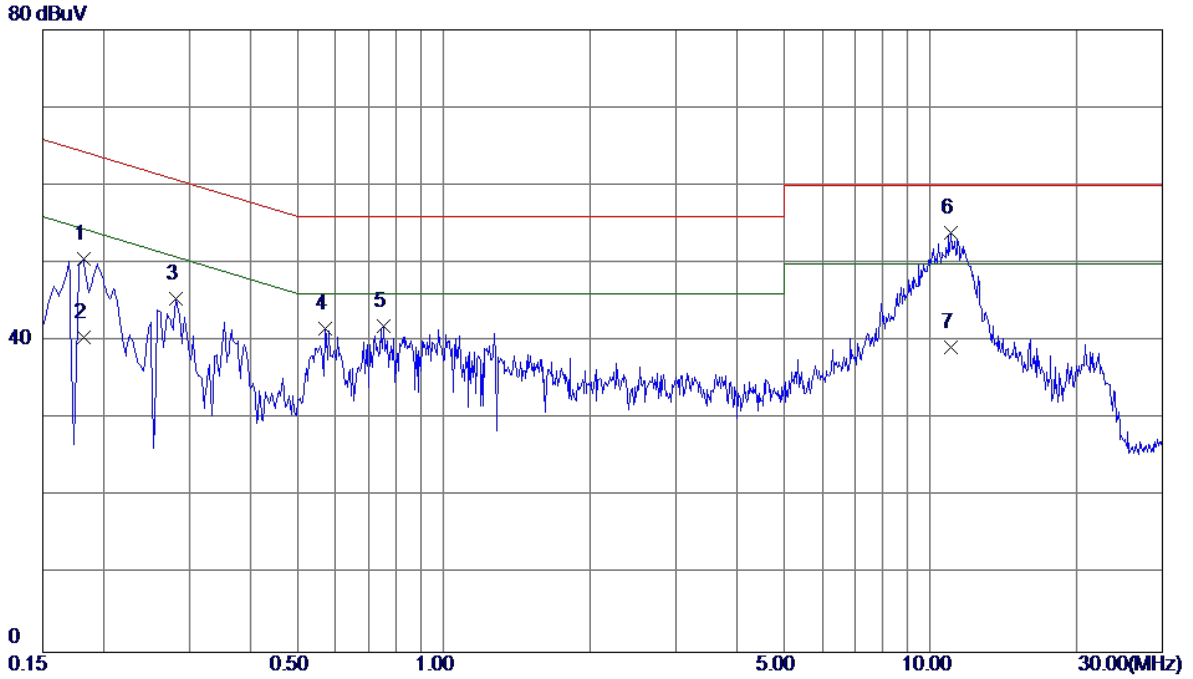


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1819	40.92	9.65	50.57	64.40	-13.83	Peak	
2	0.1819	30.89	9.65	40.54	54.40	-13.86	AVG	
3	0.2819	35.74	9.64	45.38	60.76	-15.38	Peak	
4	0.5700	31.95	9.66	41.61	56.00	-14.39	Peak	
5	0.7539	32.20	9.66	41.86	56.00	-14.14	Peak	
6 *	11.0500	43.88	10.05	53.93	60.00	-6.07	Peak	
7	11.0500	29.10	10.05	39.15	50.00	-10.85	AVG	

Note : The test result has included the cable loss.

Test Mode: TX MODE (Adapter: HUNTKEY)

Line

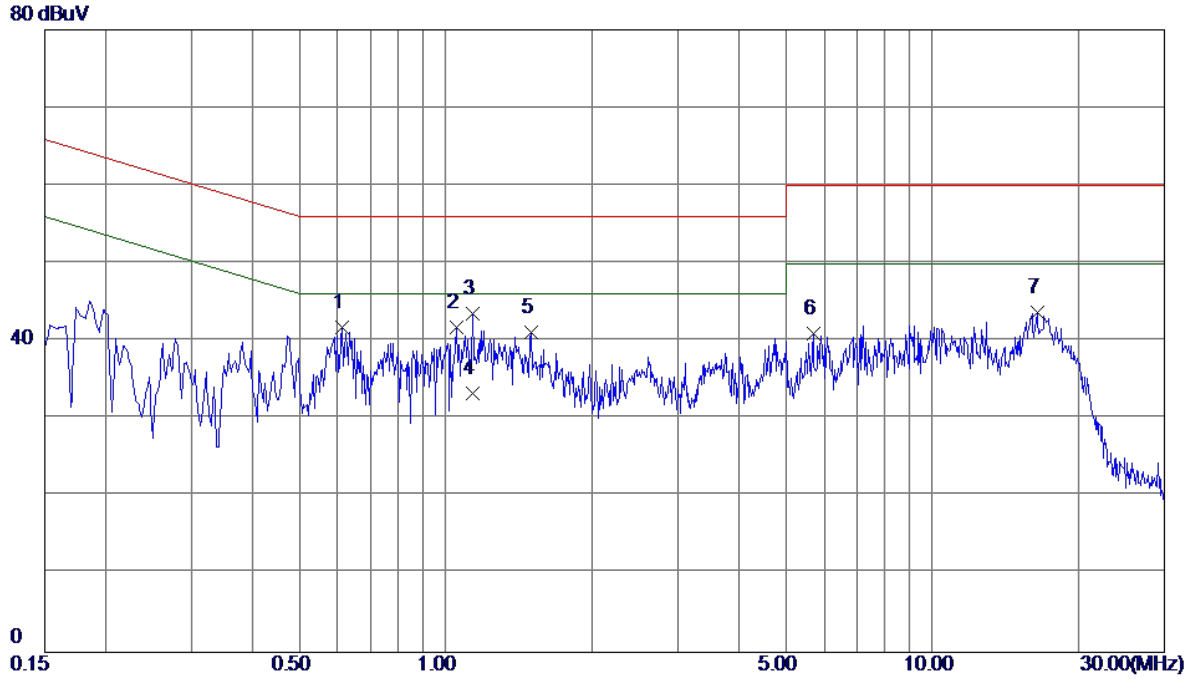


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.6140	31.99	9.76	41.75	56.00	-14.25	Peak	
2	1.0500	31.96	9.78	41.74	56.00	-14.26	Peak	
3 *	1.1380	33.74	9.79	43.53	56.00	-12.47	Peak	
4	1.1380	23.49	9.79	33.28	46.00	-12.72	AVG	
5	1.5020	31.38	9.81	41.19	56.00	-14.81	Peak	
6	5.7100	31.12	9.91	41.03	60.00	-18.97	Peak	
7	16.4580	33.41	10.26	43.67	60.00	-16.33	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE (Adapter: HUNTKEY)

Neutral

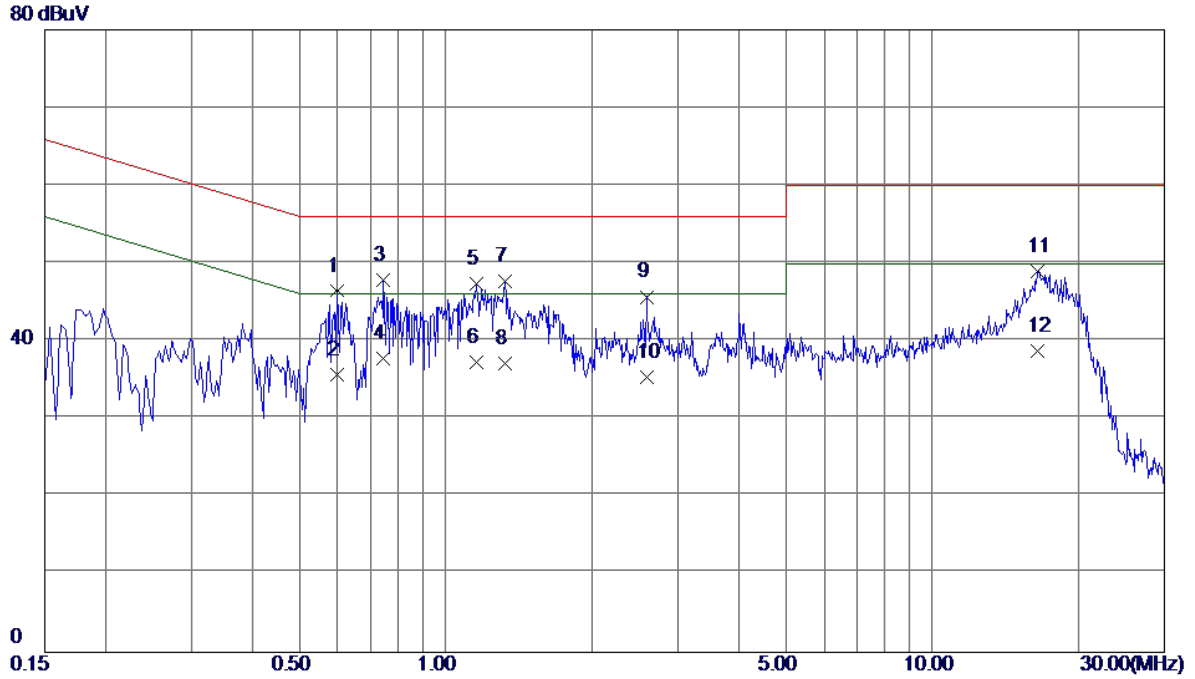


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5980	36.82	9.66	46.48	56.00	-9.52	Peak	
2	0.5980	26.10	9.66	35.76	46.00	-10.24	AVG	
3 *	0.7460	38.15	9.66	47.81	56.00	-8.19	Peak	
4	0.7460	28.11	9.66	37.77	46.00	-8.23	AVG	
5	1.1580	37.66	9.68	47.34	56.00	-8.66	Peak	
6	1.1580	27.59	9.68	37.27	46.00	-8.73	AVG	
7	1.3220	37.98	9.68	47.66	56.00	-8.34	Peak	
8	1.3220	27.40	9.68	37.08	46.00	-8.92	AVG	
9	2.5900	35.94	9.74	45.68	56.00	-10.32	Peak	
10	2.5900	25.60	9.74	35.34	46.00	-10.66	AVG	
11	16.4780	38.66	10.31	48.97	60.00	-11.03	Peak	
12	16.4780	28.40	10.31	38.71	50.00	-11.29	AVG	

Note : The test result has included the cable loss.

Test Mode: TX MODE (Adapter: BYD)

Line

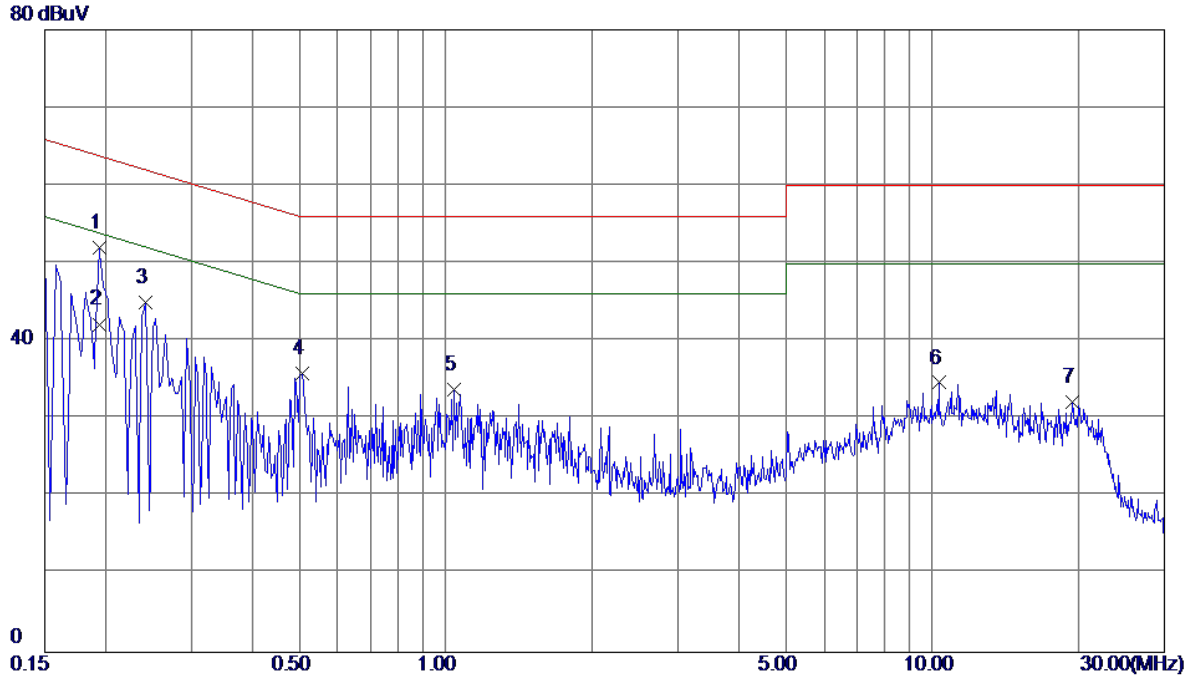


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1940	42.20	9.73	51.93	63.86	-11.93	Peak	
2 *	0.1940	32.43	9.73	42.16	53.86	-11.70	AVG	
3	0.2420	35.20	9.73	44.93	62.03	-17.10	Peak	
4	0.5060	26.15	9.76	35.91	56.00	-20.09	Peak	
5	1.0380	24.00	9.77	33.77	56.00	-22.23	Peak	
6	10.3060	24.59	10.05	34.64	60.00	-25.36	Peak	
7	19.4340	21.89	10.26	32.15	60.00	-27.85	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE (Adapter: BYD)

Neutral

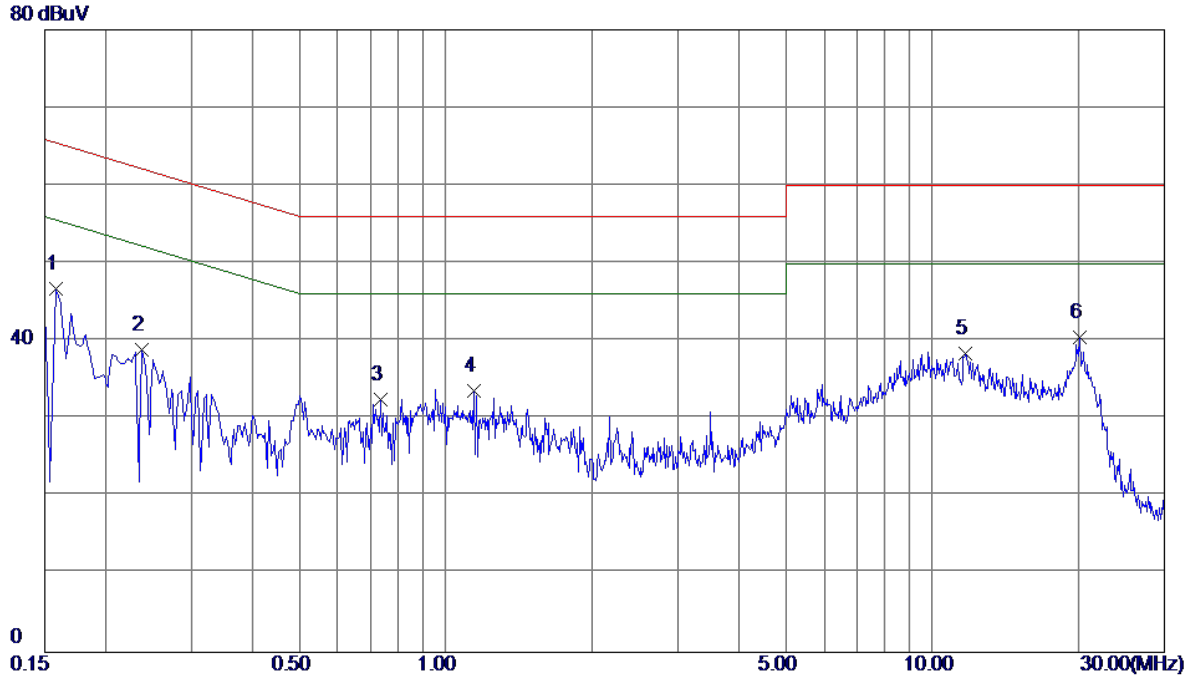


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1580	37.01	9.64	46.65	65.57	-18.92	Peak	
2	0.2380	29.17	9.64	38.81	62.17	-23.36	Peak	
3	0.7340	22.87	9.66	32.53	56.00	-23.47	Peak	
4	1.1460	23.91	9.68	33.59	56.00	-22.41	Peak	
5	11.7260	28.34	10.09	38.43	60.00	-21.57	Peak	
6	20.0740	30.09	10.36	40.45	60.00	-19.55	Peak	

Note : The test result has included the cable loss.

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX MODE (Adapter: PHITEK)


Ant 0°

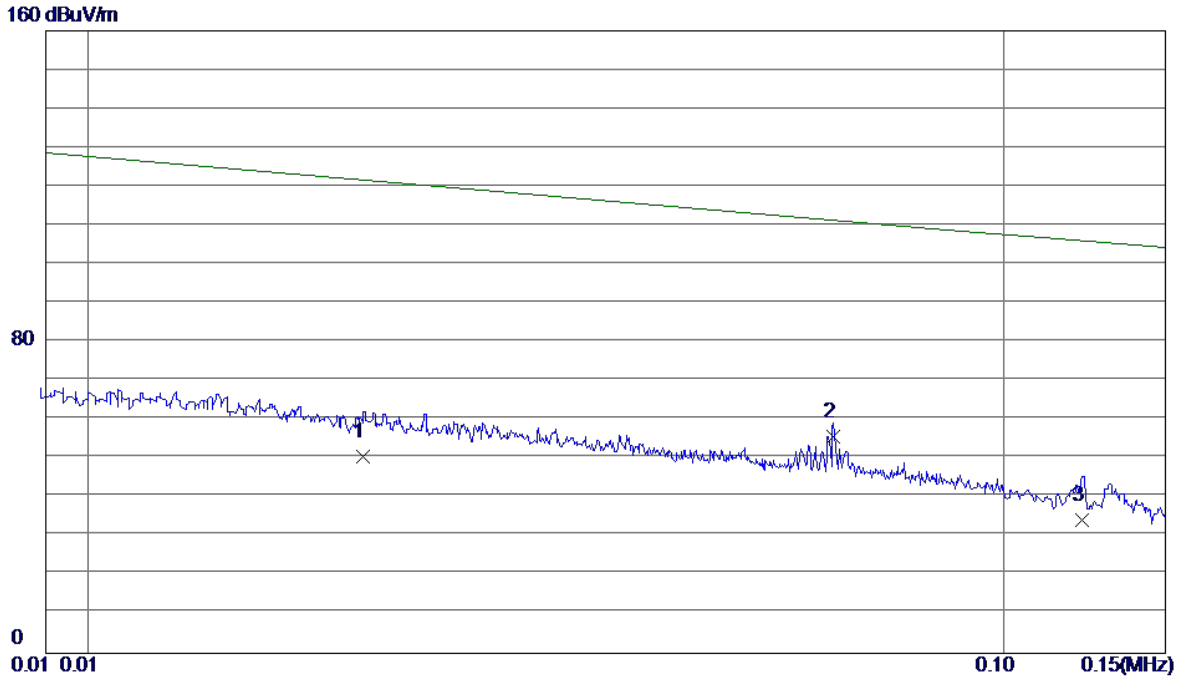

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0200	30.80	19.62	50.42	125.78	-75.36	AVG	
2 *	0.0652	37.31	18.42	55.73	114.62	-58.89	AVG	
3	0.1218	16.79	17.33	34.12	106.38	-72.26	AVG	

Test Mode: TX MODE(Adapter: PHITEK)


Ant 0°

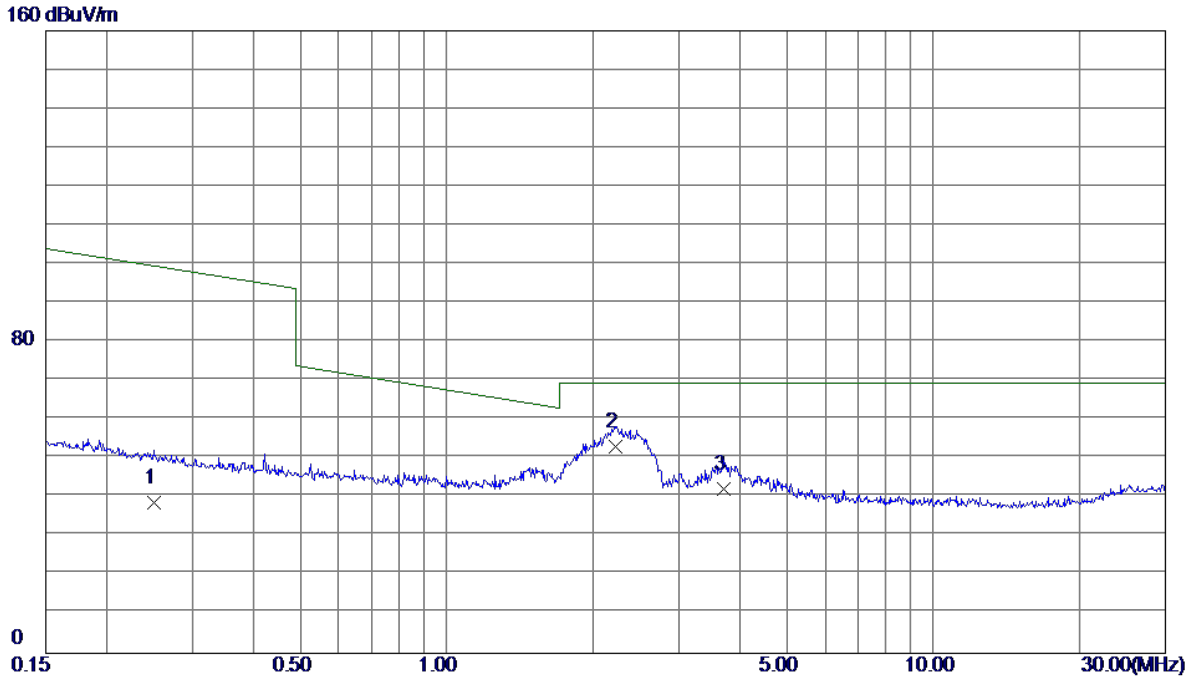

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2508	22.10	16.65	38.75	101.97	-63.22	AVG	
2 *	2.2249	37.70	15.44	53.14	69.54	-16.40	QP	
3	3.7198	27.30	15.03	42.33	69.54	-27.21	QP	

Test Mode: TX MODE(Adapter: PHITEK)


Ant 90°

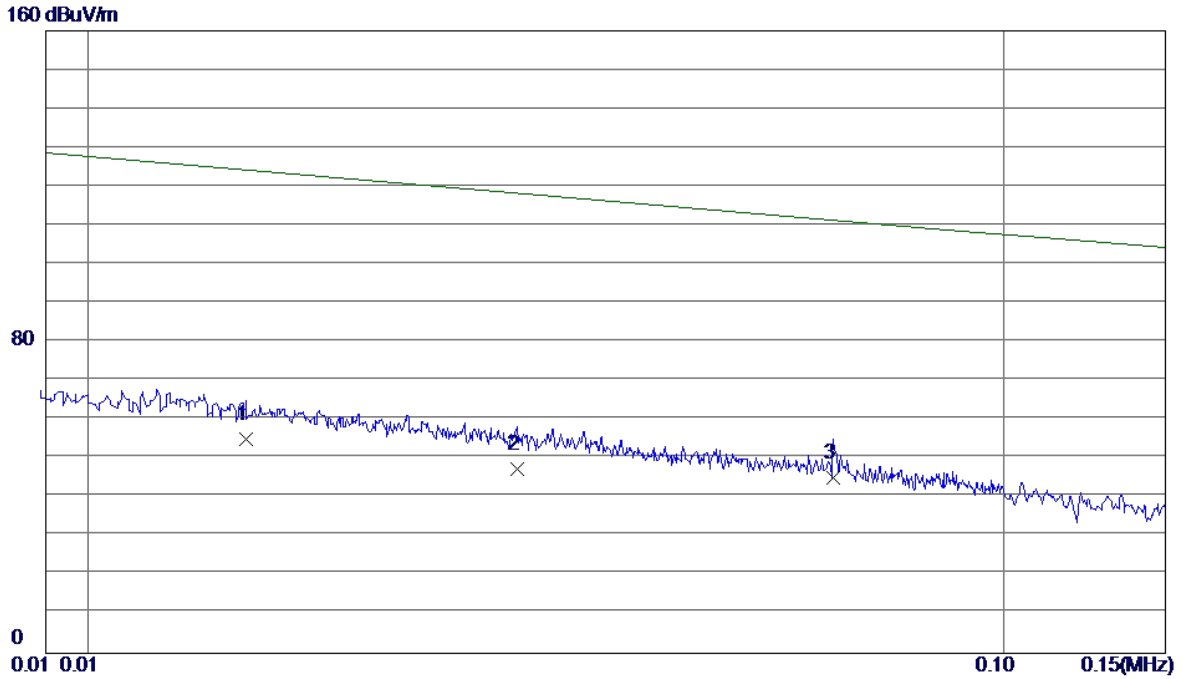

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0149	34.64	20.28	54.92	127.04	-72.12	AVG	
2	0.0294	28.03	19.34	47.37	123.46	-76.09	AVG	
3 *	0.0652	26.78	18.42	45.20	114.62	-69.42	AVG	

Test Mode: TX MODE (Adapter: PHITEK)


Ant 90°

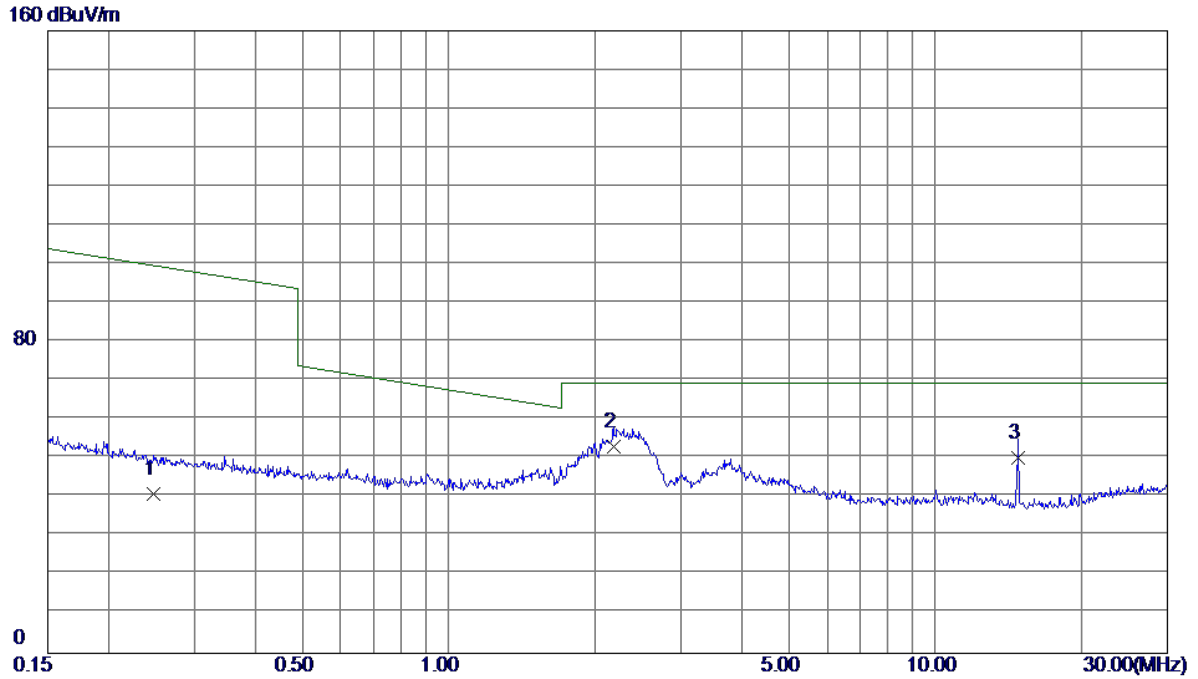

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2481	24.37	16.65	41.02	102.06	-61.04	AVG	
2 *	2.1783	37.73	15.46	53.19	69.54	-16.35	QP	
3	14.8281	36.10	14.08	50.18	69.54	-19.36	QP	

Test Mode: TX MODE (Adapter: HUNTKEY)


Ant 0°

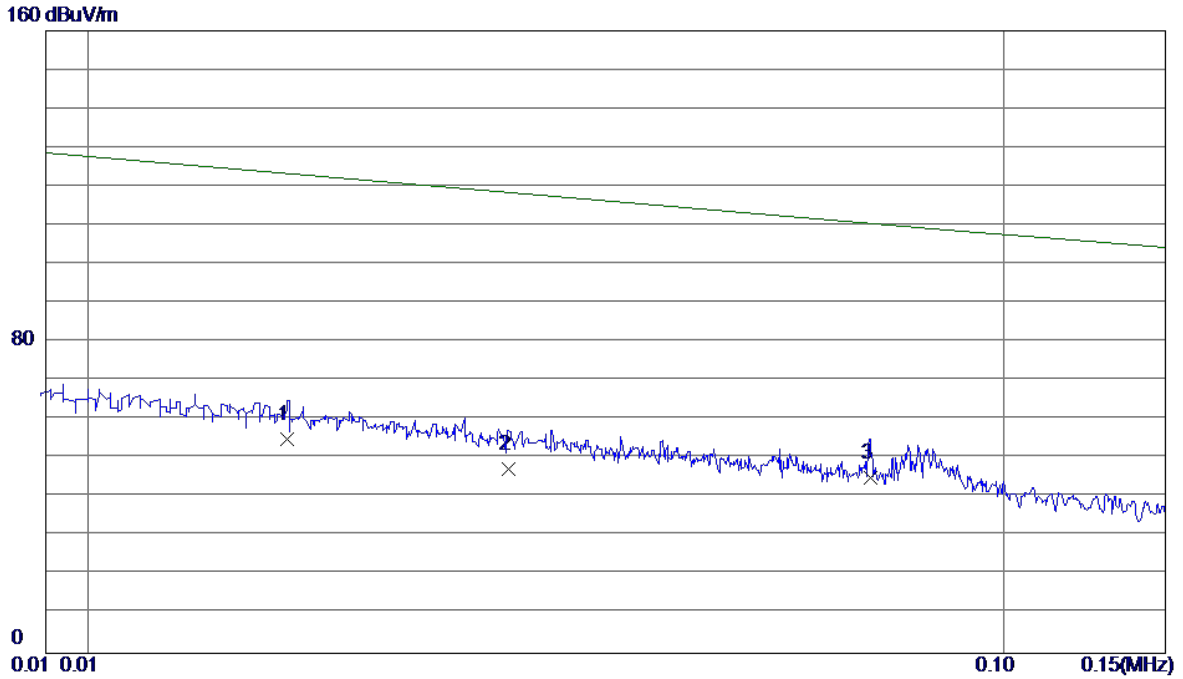

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0165	35.02	20.08	55.10	126.64	-71.54	AVG	
2	0.0288	27.98	19.36	47.34	123.61	-76.27	AVG	
3 *	0.0716	26.84	18.29	45.13	113.04	-67.91	AVG	

Test Mode: TX MODE (Adapter: HUNTKEY)


Ant 0°

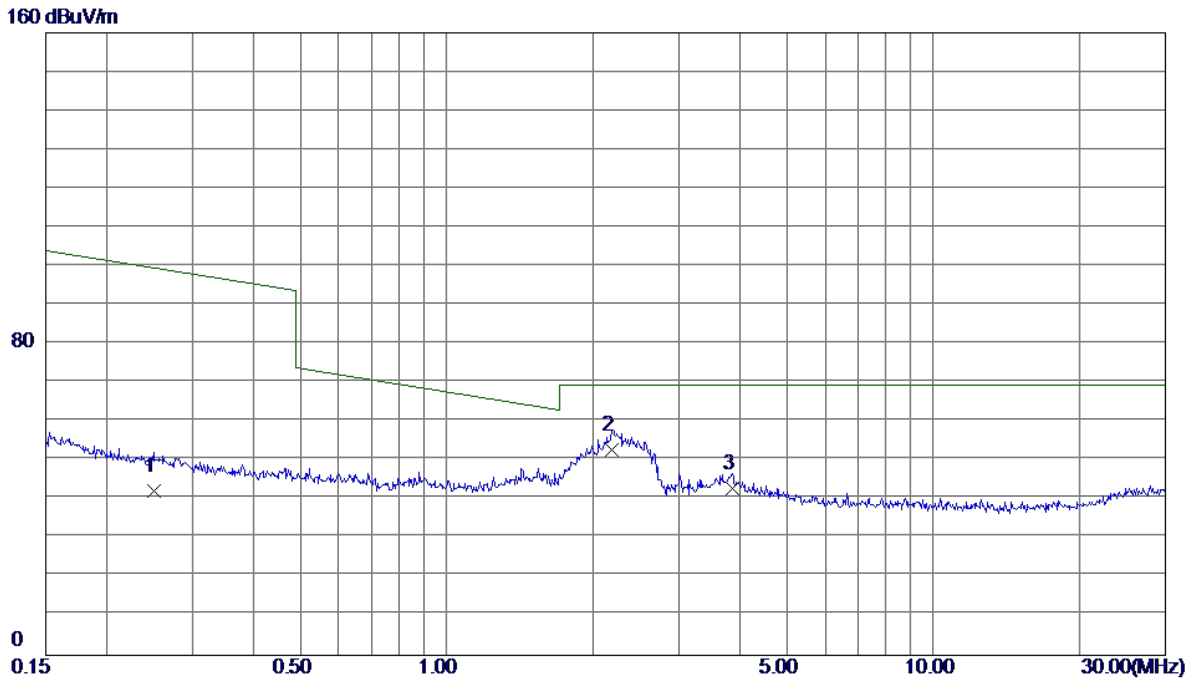

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2508	25.48	16.65	42.13	101.97	-59.84	AVG	
2 *	2.1898	37.36	15.45	52.81	69.54	-16.73	QP	
3	3.8603	27.87	14.99	42.86	69.54	-26.68	QP	

Test Mode: TX MODE (Adapter: HUNTKEY)


Ant 90°

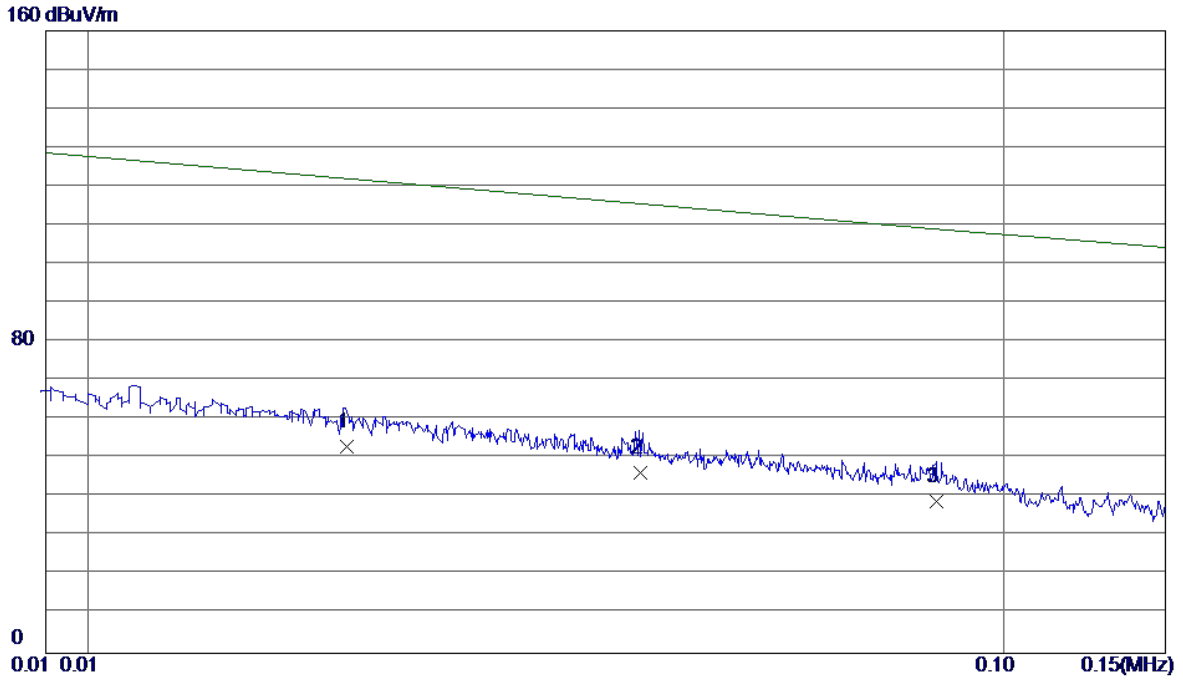

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0192	33.40	19.73	53.13	125.98	-72.85	AVG	
2	0.0401	27.41	19.02	46.43	120.82	-74.39	AVG	
3 *	0.0844	21.18	18.00	39.18	109.88	-70.70	AVG	

Test Mode: TX MODE (Adapter: HUNTKEY)


Ant 90°

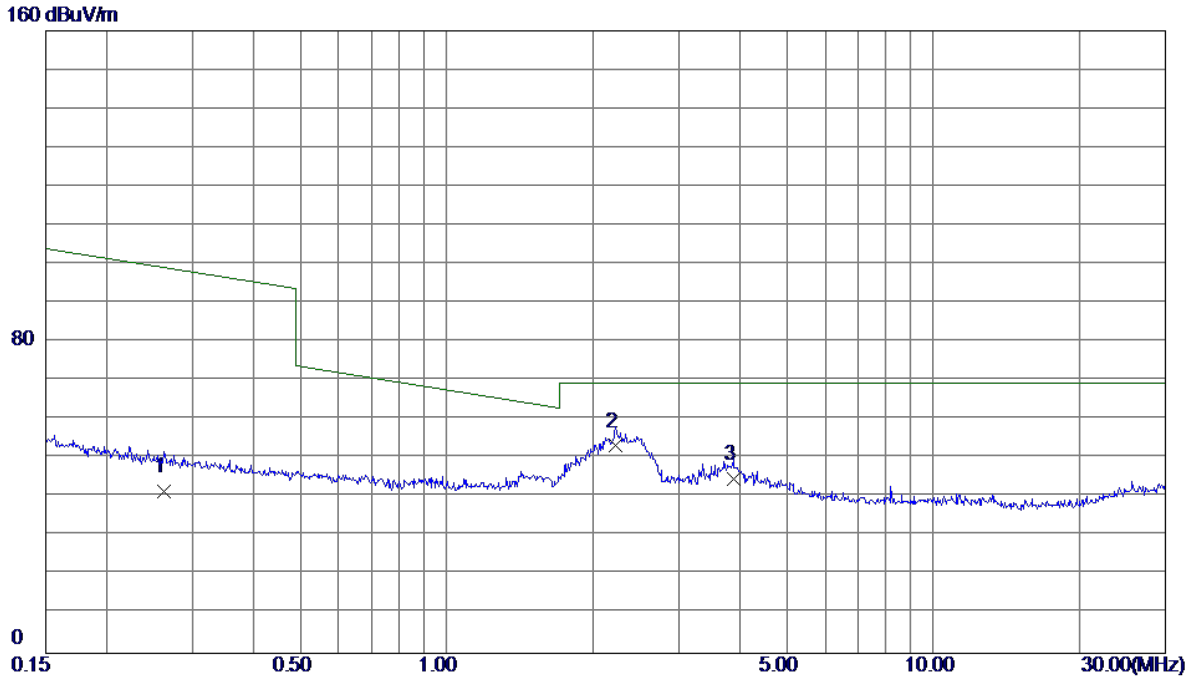

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2630	25.09	16.64	41.73	101.55	-59.82	AVG	
2 *	2.2250	37.84	15.44	53.28	69.54	-16.26	QP	
3	3.8808	29.90	14.99	44.89	69.54	-24.65	QP	

Test Mode: TX MODE (Adapter: BYD)


Ant 0°

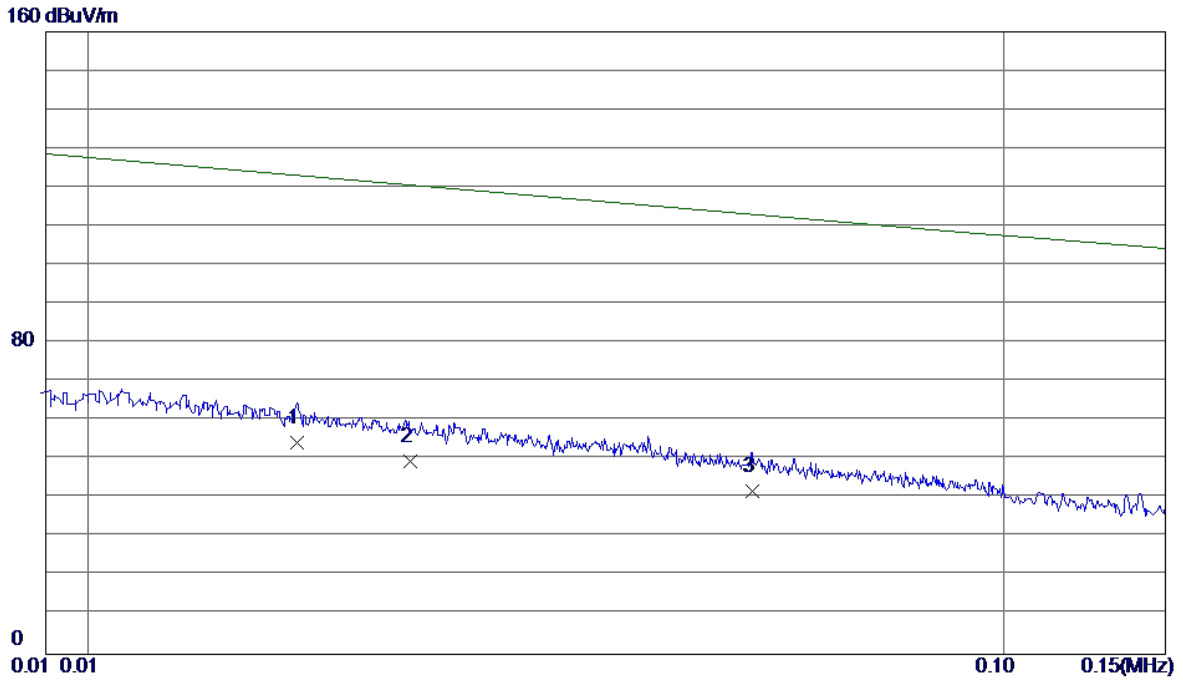

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0169	34.53	20.02	54.55	126.54	-71.99	AVG	
2	0.0225	30.18	19.55	49.73	125.16	-75.43	AVG	
3	0.0531	23.18	18.66	41.84	117.61	-75.77	AVG	

Test Mode: TX MODE (Adapter: BYD)


Ant 0°

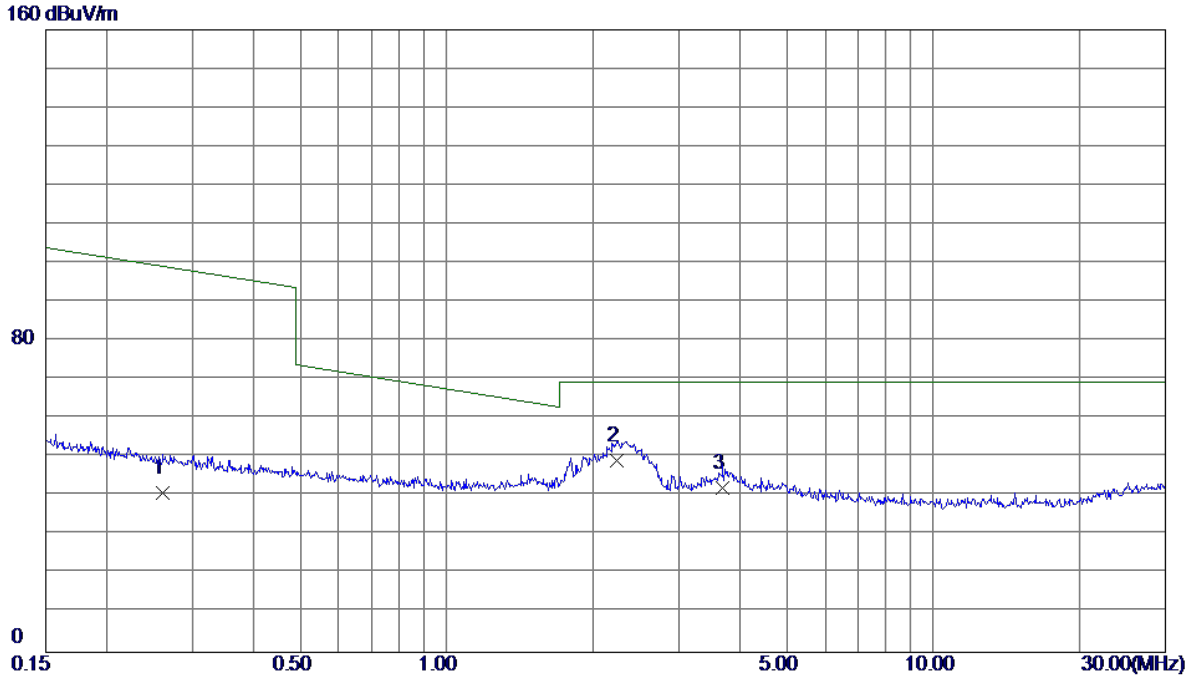

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2603	24.23	16.64	40.87	101.64	-60.77	AVG	
2 *	2.2367	33.93	15.44	49.37	69.54	-20.17	QP	
3	3.6806	27.26	15.04	42.30	69.54	-27.24	QP	

Test Mode: TX MODE (Adapter: BYD)


Ant 90°

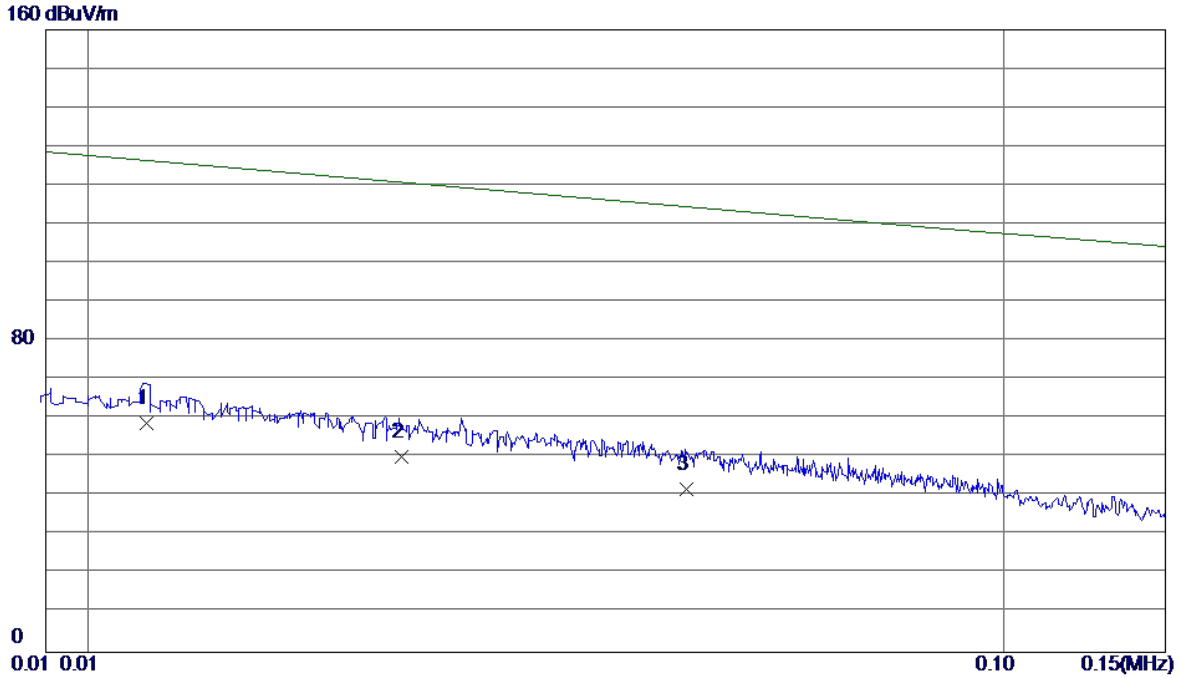

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0116	38.26	20.71	58.97	127.85	-68.88	AVG	
2	0.0220	30.55	19.56	50.11	125.29	-75.18	AVG	
3	0.0450	23.15	18.87	42.02	119.61	-77.59	AVG	

Test Mode: TX MODE (Adapter: BYD)

Ant 90°

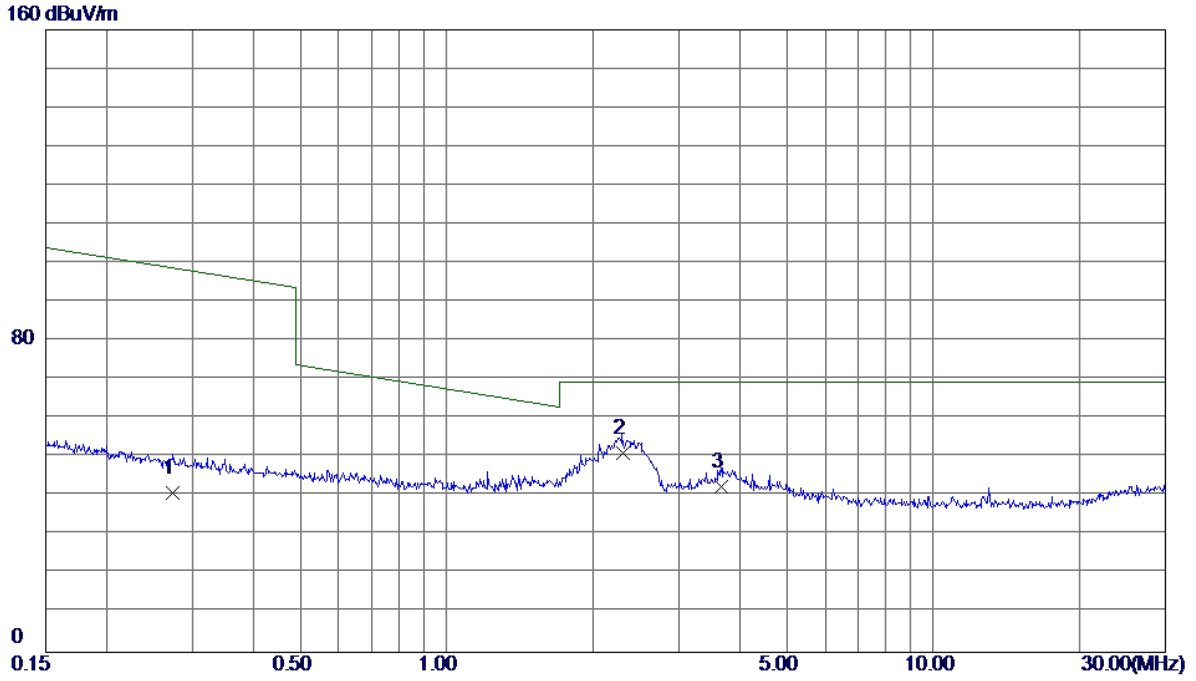


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2730	24.40	16.63	41.03	101.21	-60.18	AVG	
2 *	2.2968	35.66	15.42	51.08	69.54	-18.46	QP	
3	3.6611	27.46	15.05	42.51	69.54	-27.03	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: PHITEK)


Vertical

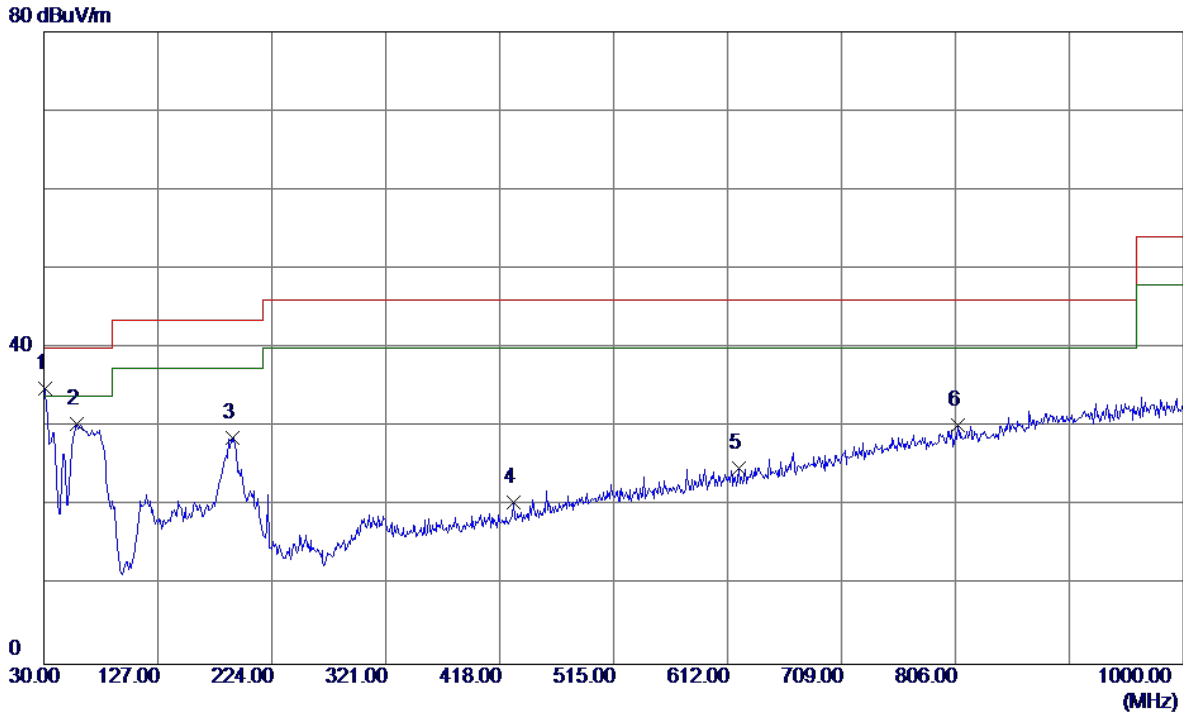

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.9700	49.76	-14.93	34.83	40.00	-5.17	Peak	
2	58.1300	44.31	-13.86	30.45	40.00	-9.55	Peak	
3	191.0200	41.23	-12.53	28.70	43.50	-14.80	Peak	
4	429.6400	30.26	-9.82	20.44	46.00	-25.56	Peak	
5	621.7000	29.89	-5.06	24.83	46.00	-21.17	Peak	
6	807.9400	30.28	-0.05	30.23	46.00	-15.77	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: PHITEK)


Horizontal

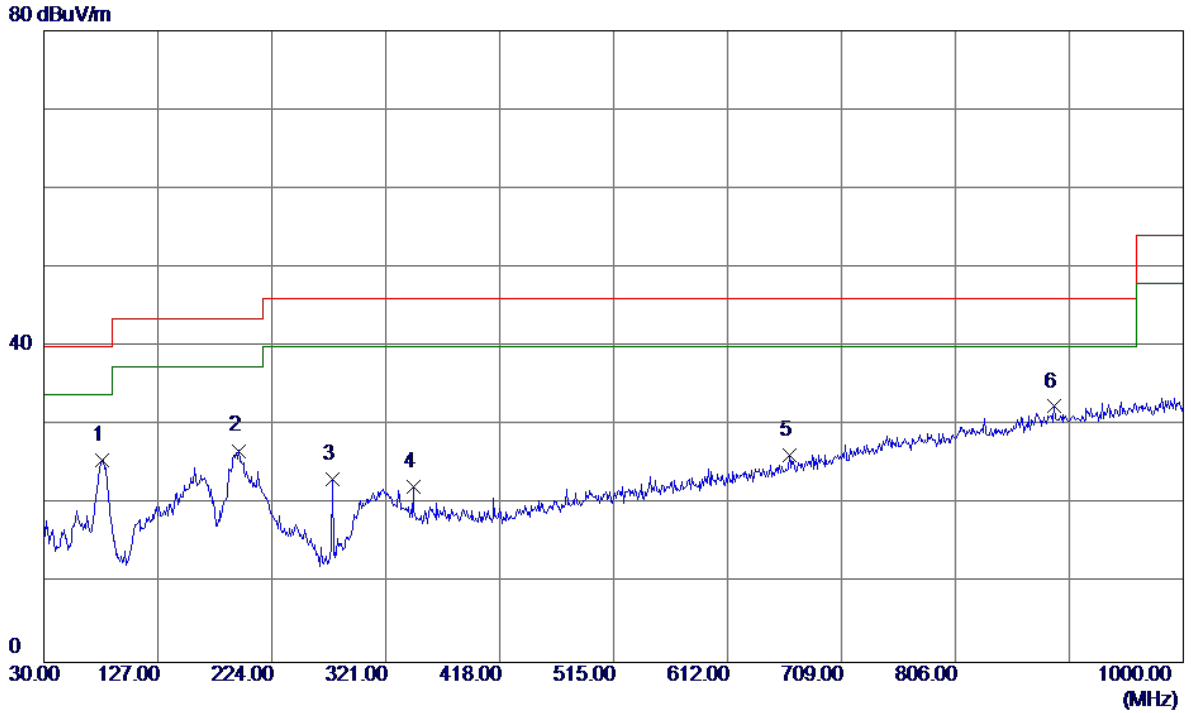

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	79.4700	43.40	-17.83	25.57	40.00	-14.43	Peak	
2	195.8700	39.77	-12.97	26.80	43.50	-16.70	Peak	
3	275.4100	37.95	-14.75	23.20	46.00	-22.80	Peak	
4	344.2800	33.74	-11.45	22.29	46.00	-23.71	Peak	
5	664.3800	30.34	-4.05	26.29	46.00	-19.71	Peak	
6 *	890.3900	30.40	2.00	32.40	46.00	-13.60	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: PHITEK)


Vertical

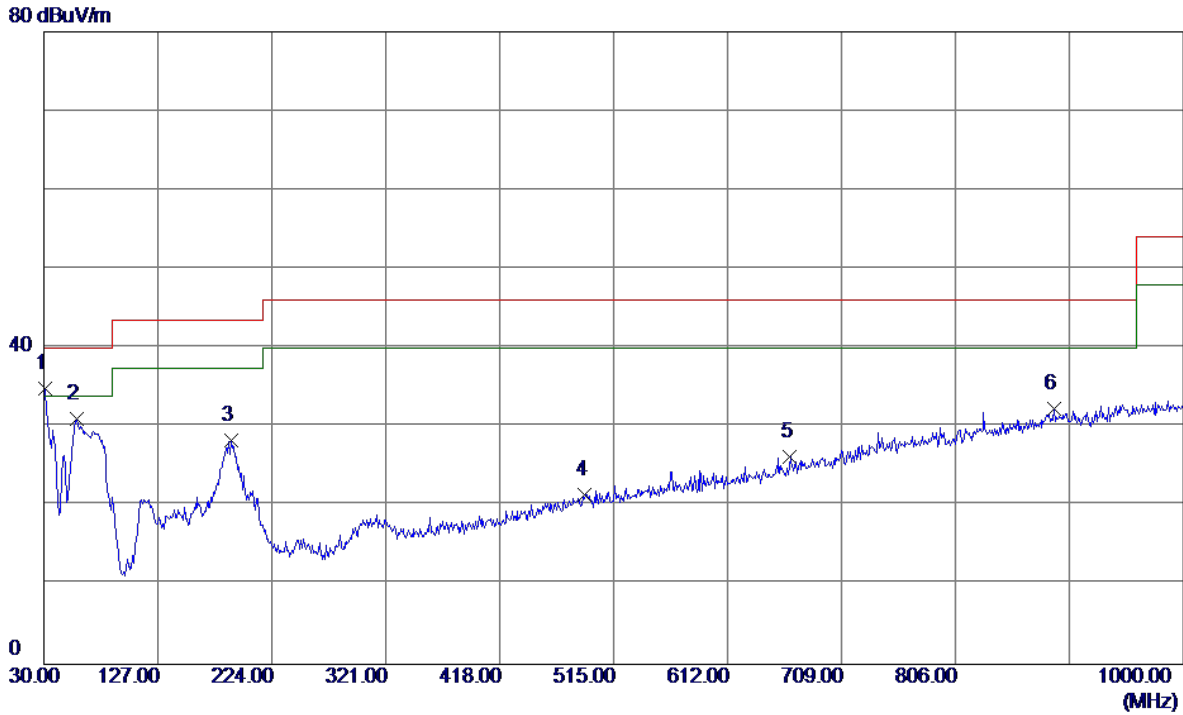

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.9700	49.82	-14.93	34.89	40.00	-5.11	Peak	
2	58.1300	44.89	-13.86	31.03	40.00	-8.97	Peak	
3	189.0800	40.75	-12.37	28.38	43.50	-15.12	Peak	
4	490.7500	29.64	-8.17	21.47	46.00	-24.53	Peak	
5	665.3500	30.33	-4.02	26.31	46.00	-19.69	Peak	
6	890.3900	30.28	2.00	32.28	46.00	-13.72	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: PHITEK)


Horizontal

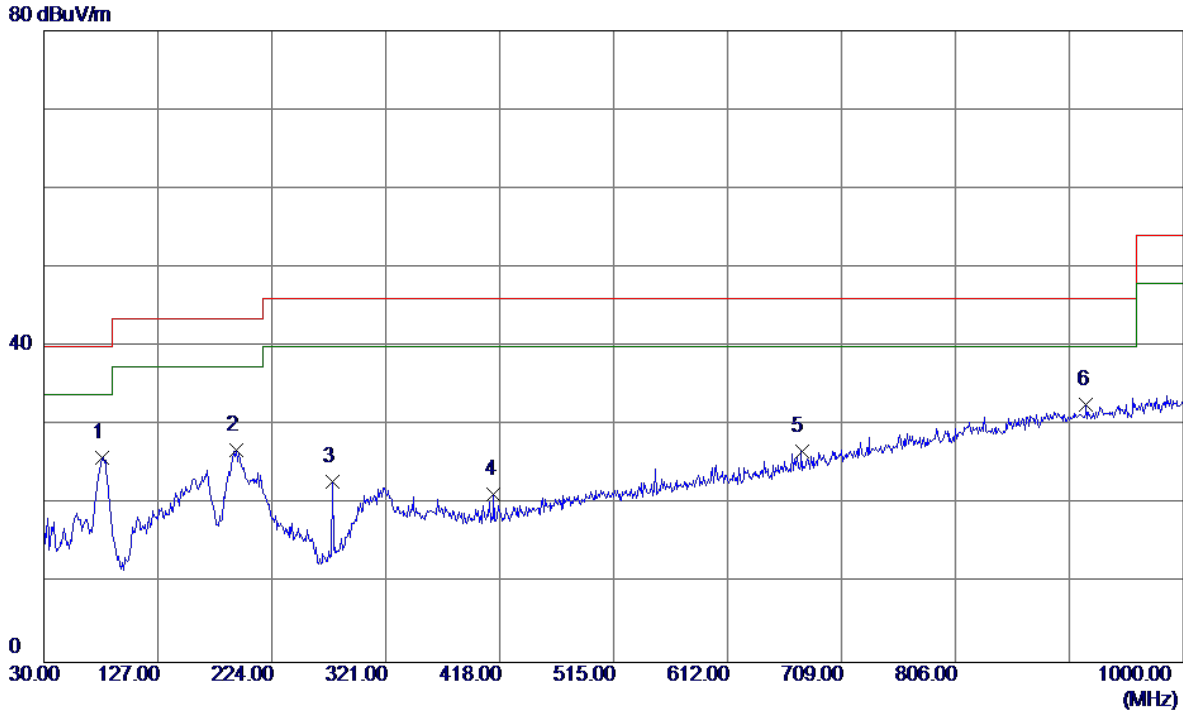

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	79.4700	43.79	-17.83	25.96	40.00	-14.04	Peak	
2	193.9299	39.75	-12.80	26.95	43.50	-16.55	Peak	
3	275.4100	37.60	-14.75	22.85	46.00	-23.15	Peak	
4	413.1500	31.56	-10.31	21.25	46.00	-24.75	Peak	
5	675.0500	30.48	-3.71	26.77	46.00	-19.23	Peak	
6 *	917.5500	30.07	2.56	32.63	46.00	-13.37	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: PHITEK)


Vertical

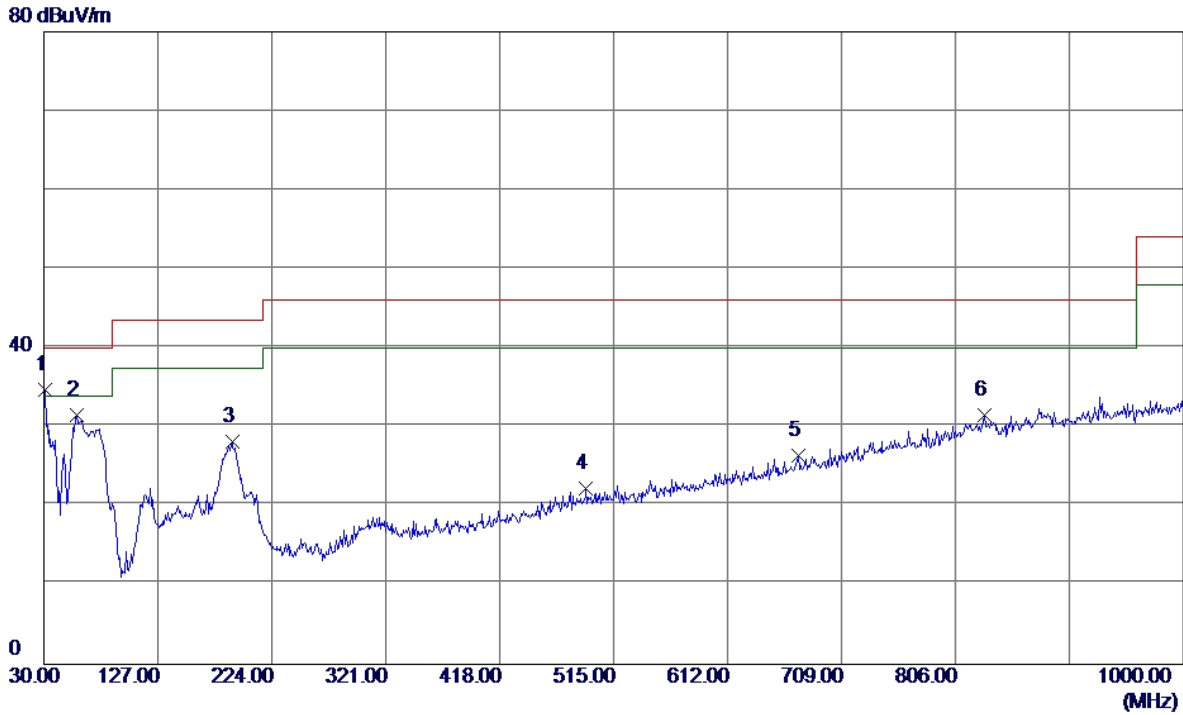

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.9700	49.62	-14.93	34.69	40.00	-5.31	Peak	
2	58.1300	45.43	-13.86	31.57	40.00	-8.43	Peak	
3	190.0500	40.62	-12.45	28.17	43.50	-15.33	Peak	
4	491.7200	30.37	-8.14	22.23	46.00	-23.77	Peak	
5	672.1400	30.14	-3.80	26.34	46.00	-19.66	Peak	
6	831.2199	30.92	0.60	31.52	46.00	-14.48	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: PHITEK)


Horizontal

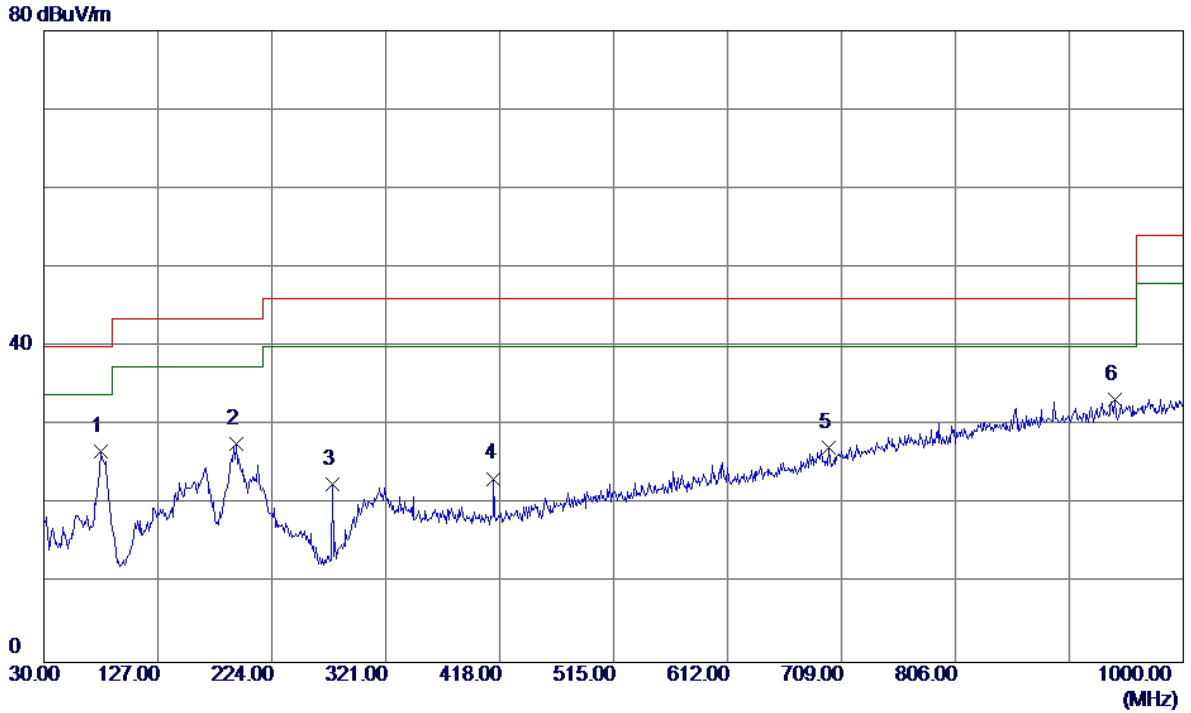

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	78.5000	44.35	-17.60	26.75	40.00	-13.25	Peak	
2	193.9299	40.42	-12.80	27.62	43.50	-15.88	Peak	
3	275.4100	37.27	-14.75	22.52	46.00	-23.48	Peak	
4	413.1500	33.59	-10.31	23.28	46.00	-22.72	Peak	
5	698.3300	30.16	-2.97	27.19	46.00	-18.81	Peak	
6 *	941.8000	30.27	3.05	33.32	46.00	-12.68	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: PHITEK)


Vertical

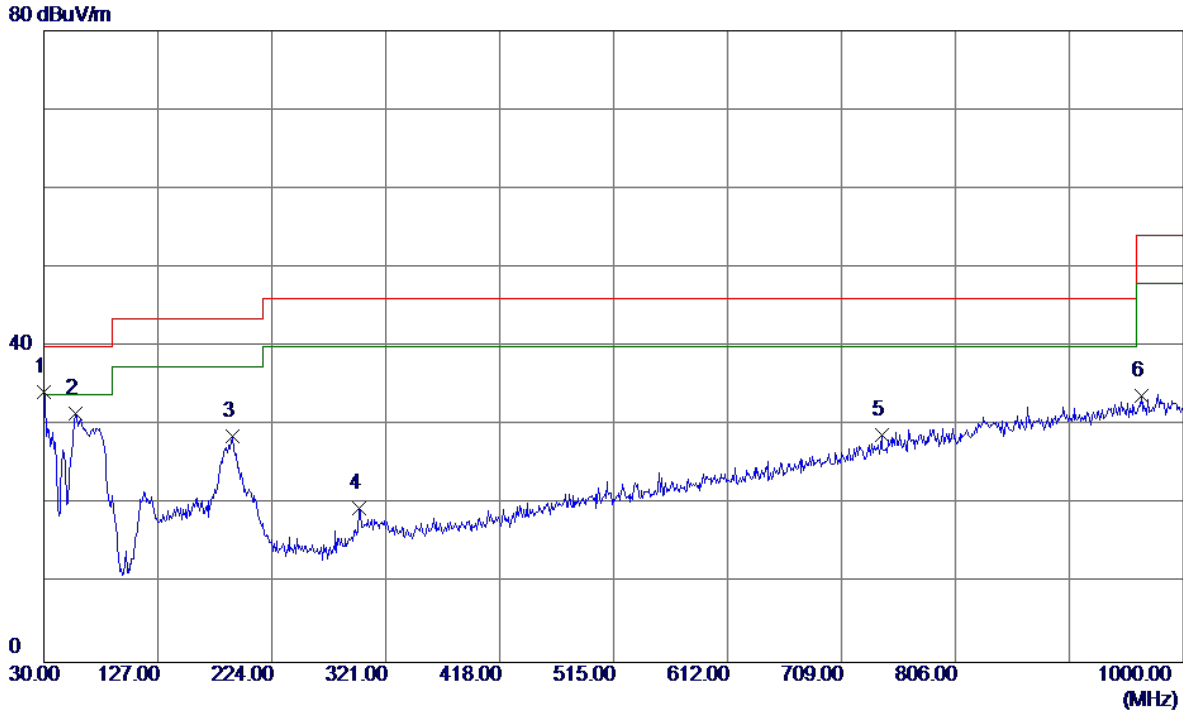

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	49.26	-15.04	34.22	40.00	-5.78	Peak	
2	57.1600	45.29	-13.77	31.52	40.00	-8.48	Peak	
3	191.0200	41.10	-12.53	28.57	43.50	-14.93	Peak	
4	298.6900	32.04	-12.46	19.58	46.00	-26.42	Peak	
5	742.9500	30.35	-1.61	28.74	46.00	-17.26	Peak	
6	964.1100	30.22	3.49	33.71	54.00	-20.29	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: PHITEK)


Horizontal

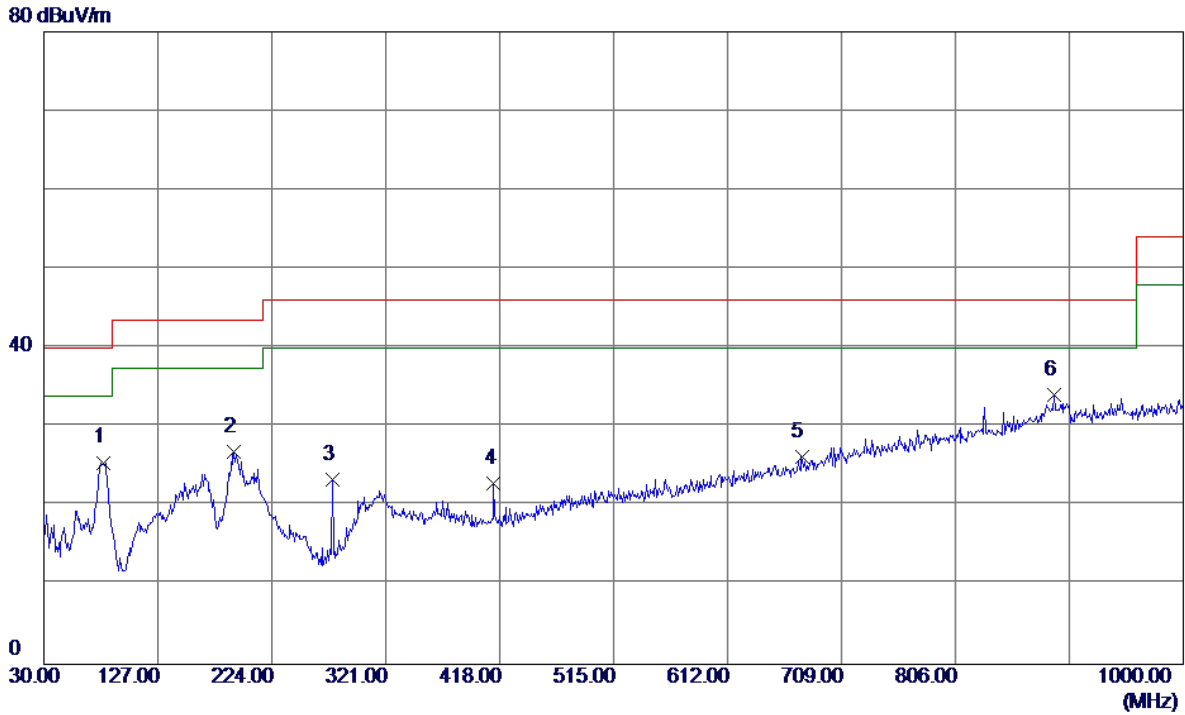

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	80.4400	43.48	-17.96	25.52	40.00	-14.48	Peak	
2	191.9900	39.54	-12.62	26.92	43.50	-16.58	Peak	
3	275.4100	38.04	-14.75	23.29	46.00	-22.71	Peak	
4	413.1500	33.16	-10.31	22.85	46.00	-23.15	Peak	
5	675.0500	29.90	-3.71	26.19	46.00	-19.81	Peak	
6 *	890.3900	32.03	2.00	34.03	46.00	-11.97	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: PHITEK)


Vertical

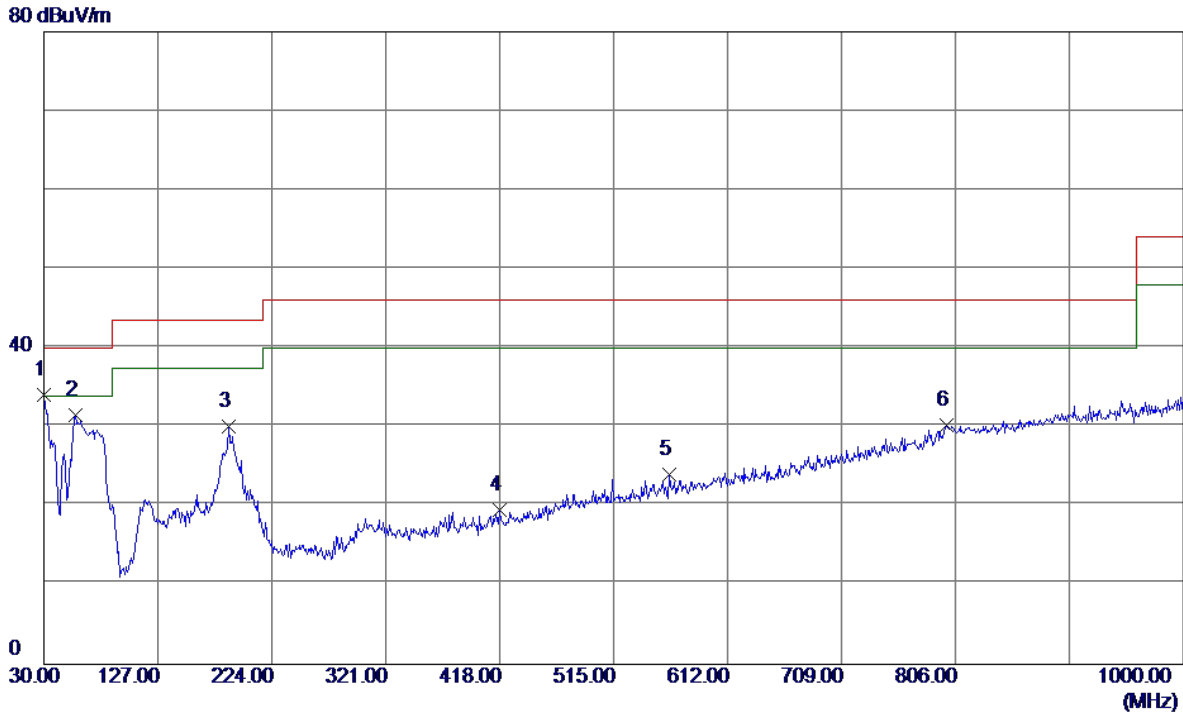

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	49.16	-15.04	34.12	40.00	-5.88	Peak	
2	57.1600	45.35	-13.77	31.58	40.00	-8.42	Peak	
3	187.1400	42.25	-12.22	30.03	43.50	-13.47	Peak	
4	418.0000	29.71	-10.17	19.54	46.00	-26.46	Peak	
5	562.5300	30.50	-6.52	23.98	46.00	-22.02	Peak	
6	798.2400	30.51	-0.31	30.20	46.00	-15.80	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: PHITEK)


Horizontal

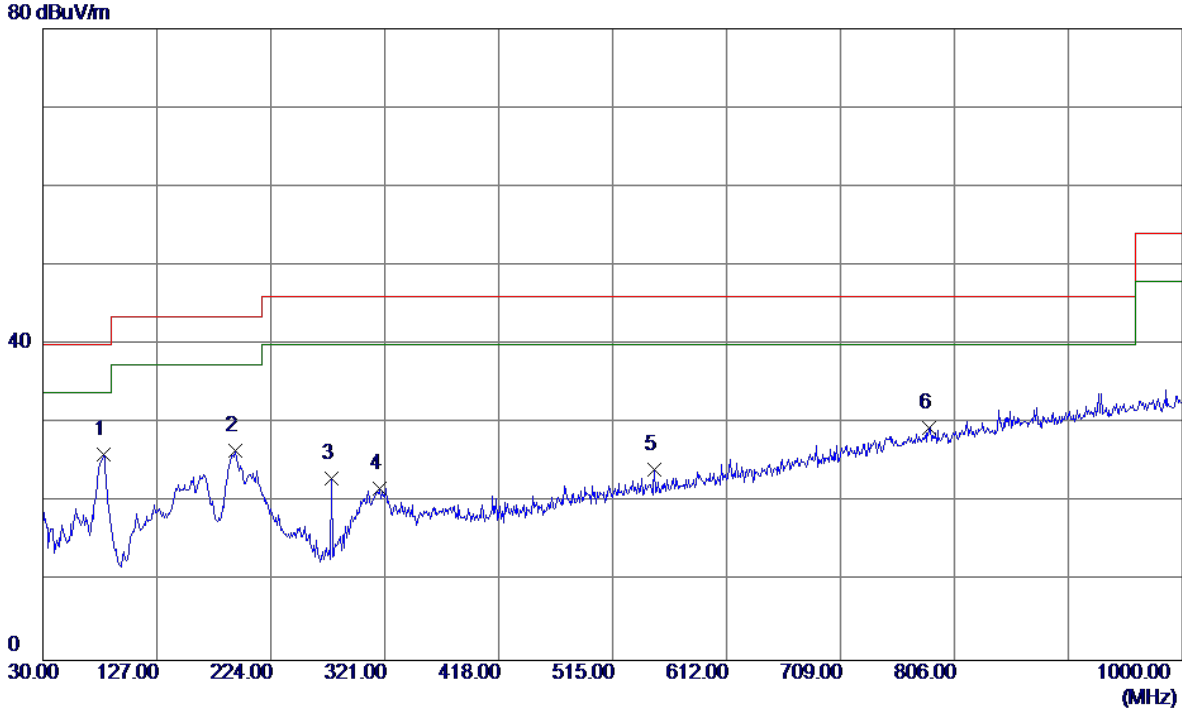

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	81.4100	44.08	-17.99	26.09	40.00	-13.91	Peak	
2	193.9299	39.34	-12.80	26.54	43.50	-16.96	Peak	
3	275.4100	37.86	-14.75	23.11	46.00	-22.89	Peak	
4	317.1200	33.77	-11.96	21.81	46.00	-24.19	Peak	
5	550.8900	30.98	-6.84	24.14	46.00	-21.86	Peak	
6	784.6599	30.06	-0.62	29.44	46.00	-16.56	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: PHITEK)


Vertical

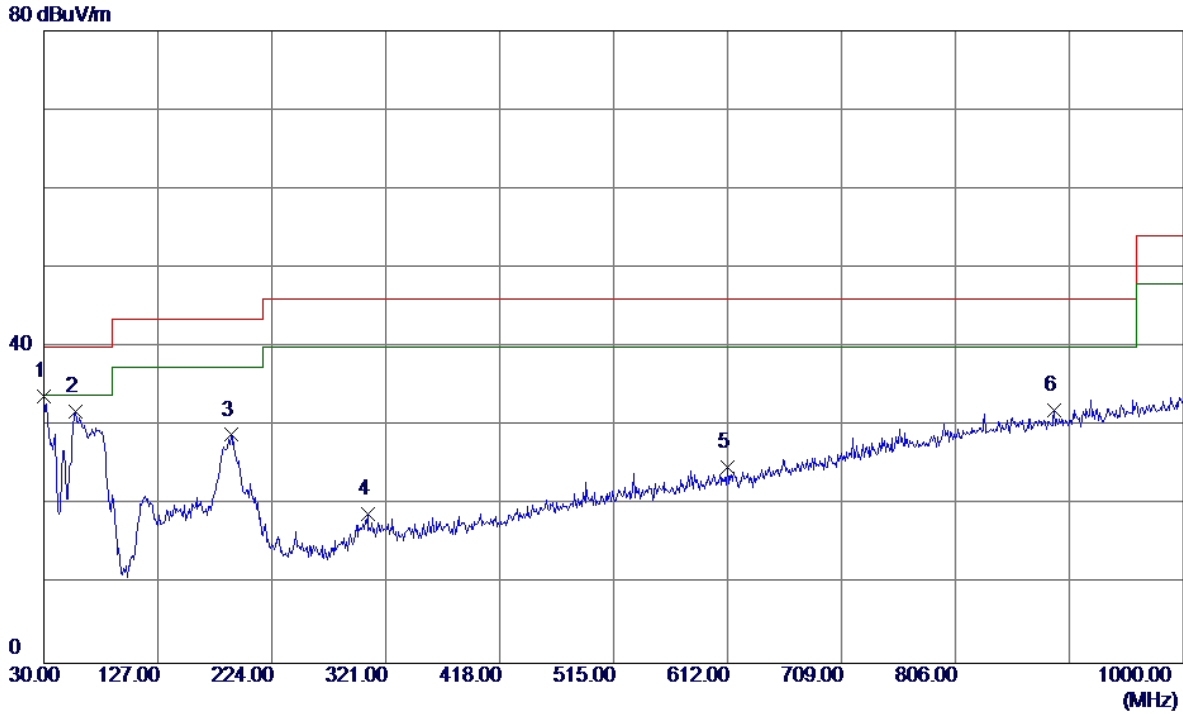

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	48.81	-15.04	33.77	40.00	-6.23	Peak	
2	57.1600	45.60	-13.77	31.83	40.00	-8.17	Peak	
3	189.0800	41.25	-12.37	28.88	43.50	-14.62	Peak	
4	305.4800	31.12	-12.18	18.94	46.00	-27.06	Peak	
5	612.0000	30.13	-5.25	24.88	46.00	-21.12	Peak	
6	890.3900	30.01	2.00	32.01	46.00	-13.99	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: PHITEK)


Horizontal

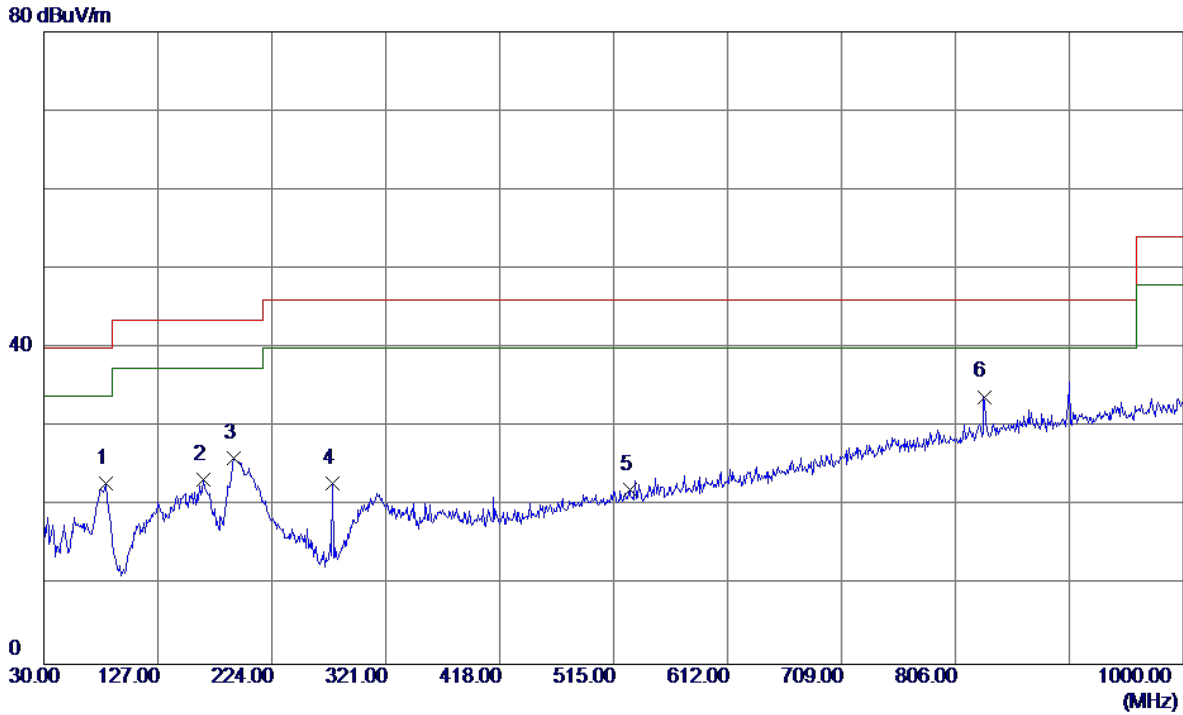

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	82.3800	40.97	-18.02	22.95	40.00	-17.05	Peak	
2	165.8000	35.50	-12.20	23.30	43.50	-20.20	Peak	
3	191.9900	38.63	-12.62	26.01	43.50	-17.49	Peak	
4	275.4100	37.57	-14.75	22.82	46.00	-23.18	Peak	
5	528.5800	29.35	-7.32	22.03	46.00	-23.97	Peak	
6 *	830.2500	33.27	0.57	33.84	46.00	-12.16	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: PHITEK)


Vertical

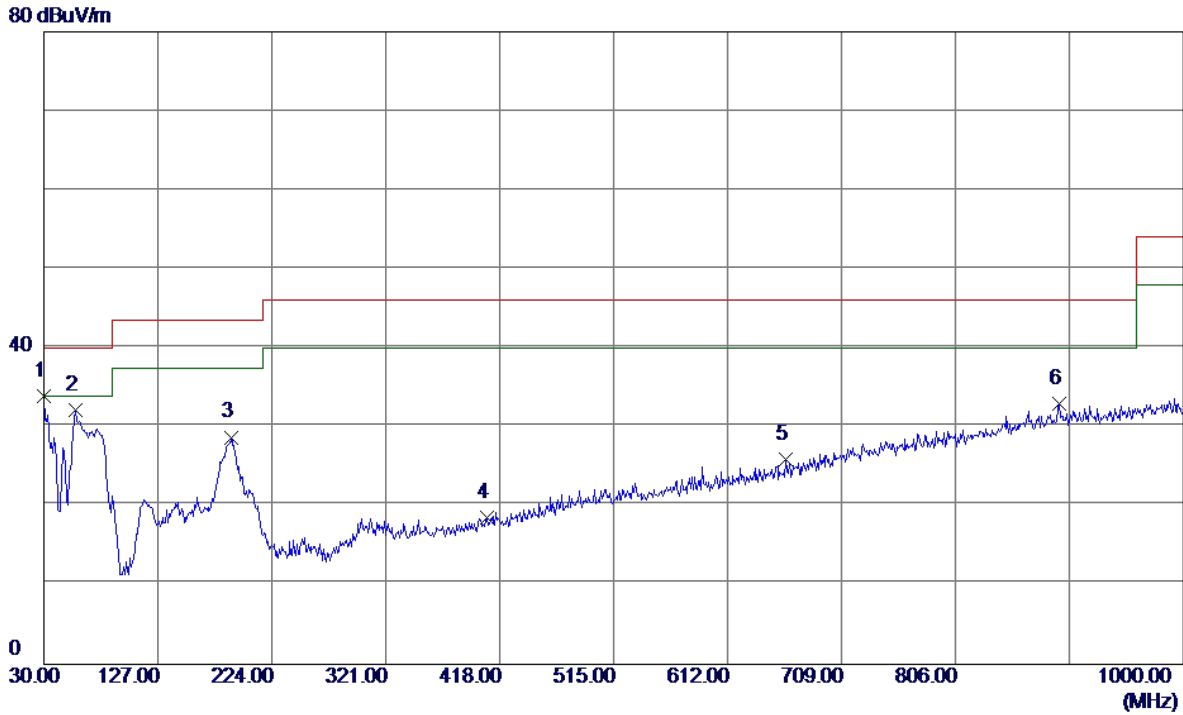

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	48.97	-15.04	33.93	40.00	-6.07	Peak	
2	57.1600	45.89	-13.77	32.12	40.00	-7.88	Peak	
3	189.0800	41.09	-12.37	28.72	43.50	-14.78	Peak	
4	407.3299	28.99	-10.48	18.51	46.00	-27.49	Peak	
5	661.4699	30.04	-4.14	25.90	46.00	-20.10	Peak	
6	894.2700	30.80	2.09	32.89	46.00	-13.11	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: PHITEK)


Horizontal

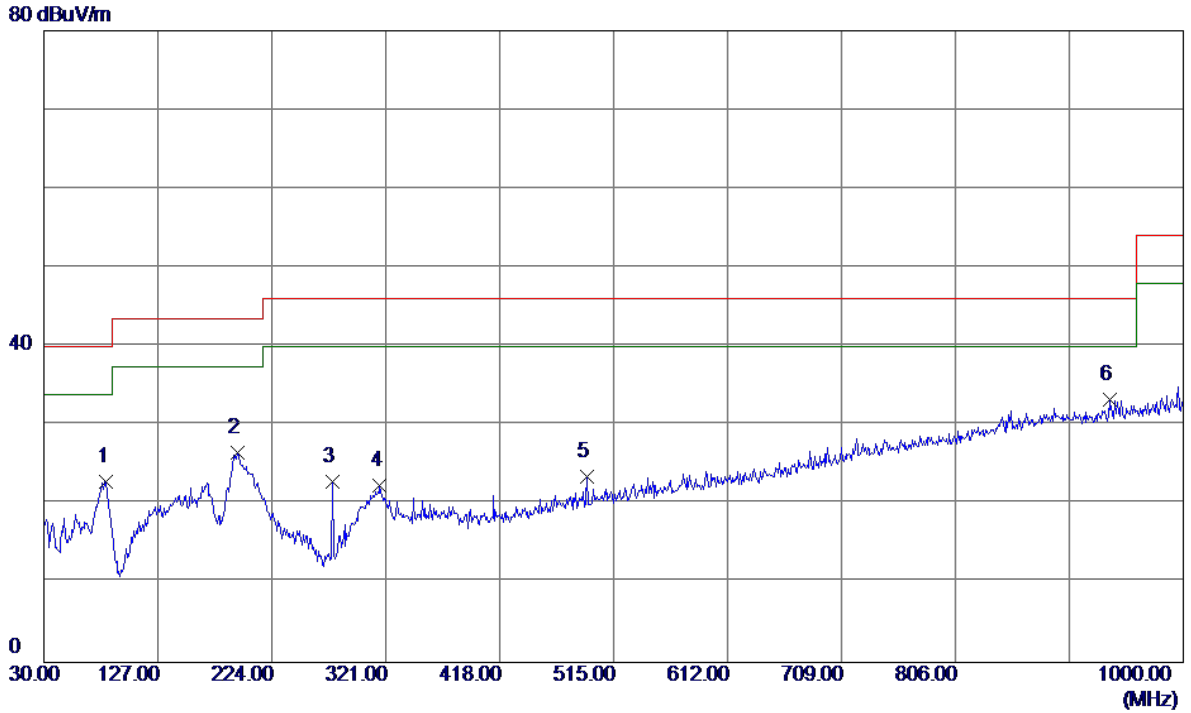

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	83.3500	41.00	-18.05	22.95	40.00	-17.05	Peak	
2	194.9000	39.38	-12.88	26.50	43.50	-17.00	Peak	
3	275.4100	37.60	-14.75	22.85	46.00	-23.15	Peak	
4	316.1500	34.32	-11.98	22.34	46.00	-23.66	Peak	
5	492.6900	31.66	-8.12	23.54	46.00	-22.46	Peak	
6 *	936.9500	30.38	2.95	33.33	46.00	-12.67	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: PHITEK)


Vertical

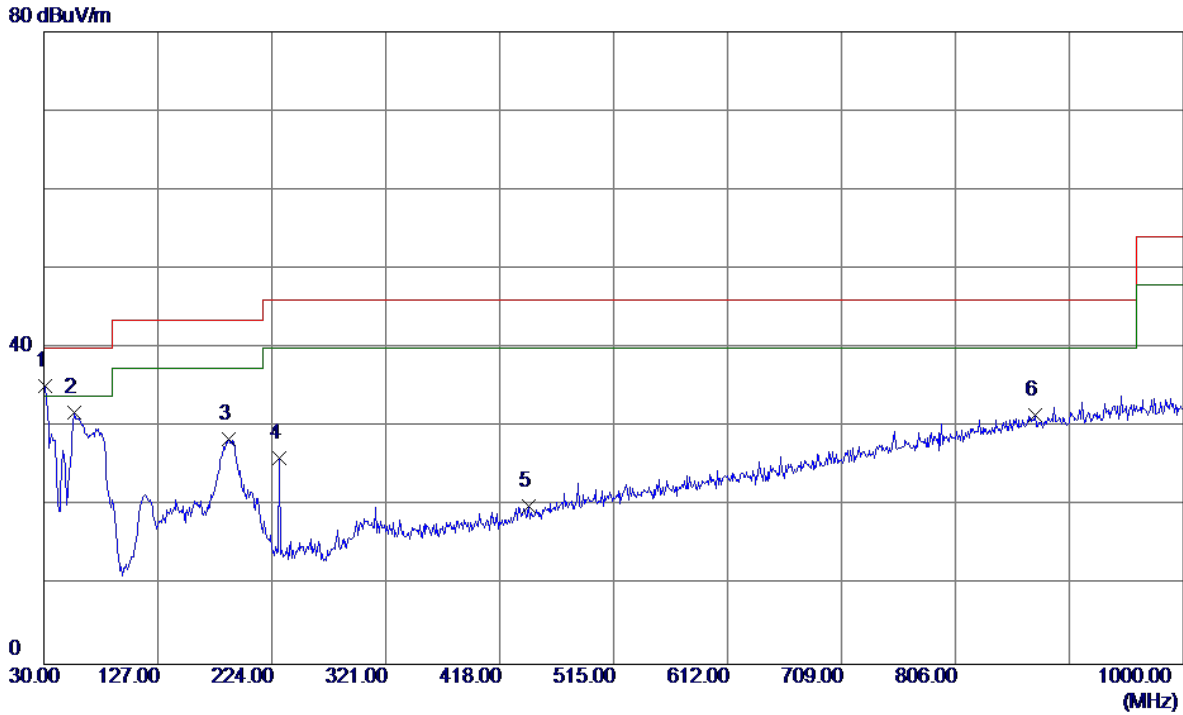

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.9700	50.12	-14.93	35.19	40.00	-4.81	Peak	
2	56.1900	45.49	-13.68	31.81	40.00	-8.19	Peak	
3	187.1400	40.63	-12.22	28.41	43.50	-15.09	Peak	
4	230.7900	39.77	-13.70	26.07	46.00	-19.93	Peak	
5	443.2200	29.48	-9.42	20.06	46.00	-25.94	Peak	
6	873.9000	29.86	1.64	31.50	46.00	-14.50	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: PHITEK)


Horizontal

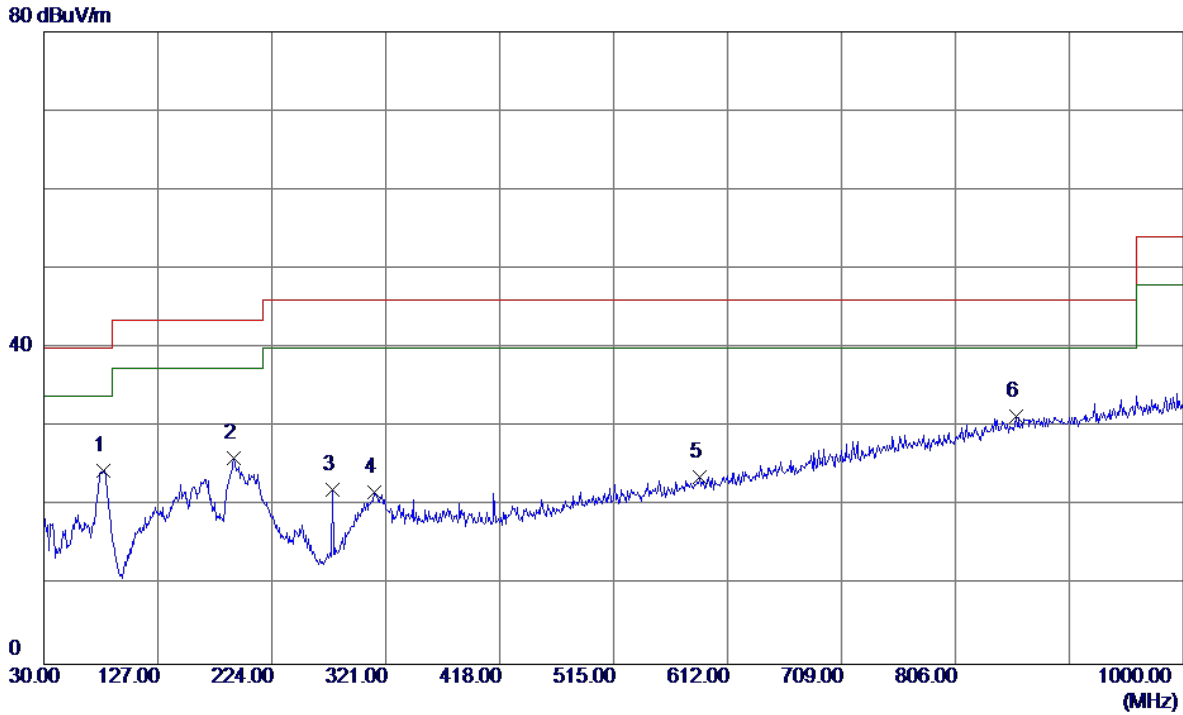

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	80.4400	42.50	-17.96	24.54	40.00	-15.46	Peak	
2	191.9900	38.73	-12.62	26.11	43.50	-17.39	Peak	
3	275.4100	36.77	-14.75	22.02	46.00	-23.98	Peak	
4	311.3000	33.82	-12.07	21.75	46.00	-24.25	Peak	
5	588.7199	29.47	-5.80	23.67	46.00	-22.33	Peak	
6 *	857.4100	30.03	1.28	31.31	46.00	-14.69	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: HUNTKEY)


Vertical

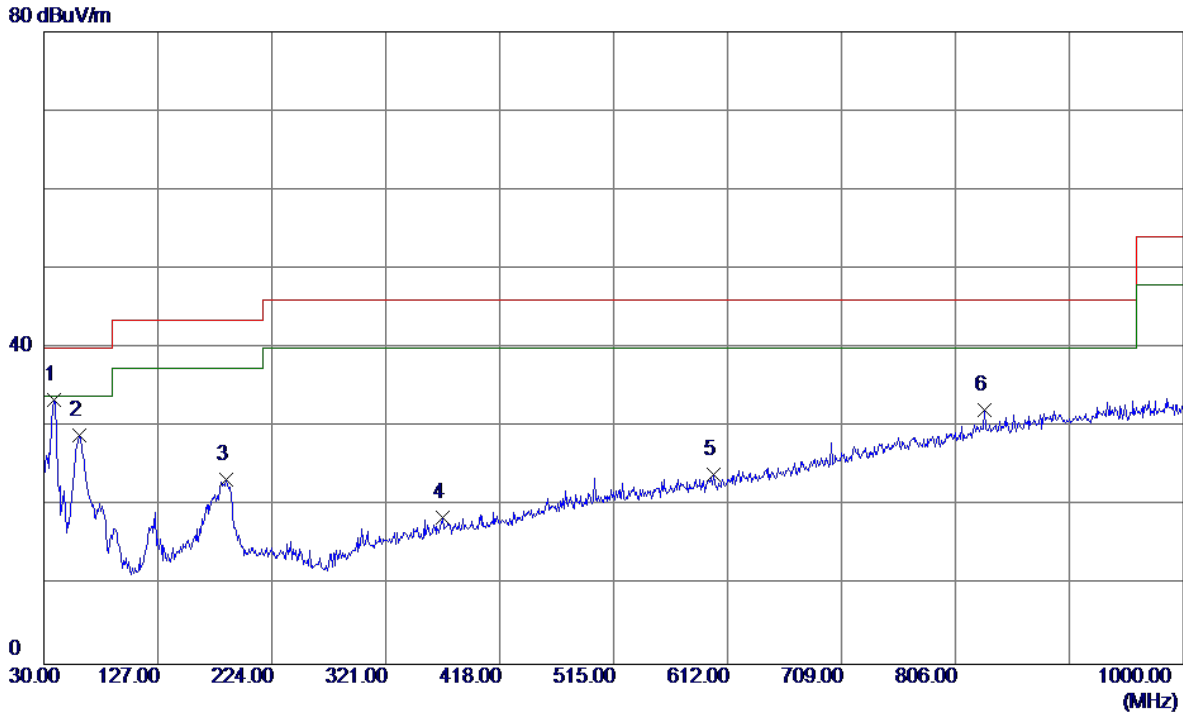

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	38.7300	47.32	-13.93	33.39	40.00	-6.61	Peak	
2	60.0700	43.01	-14.04	28.97	40.00	-11.03	Peak	
3	185.2000	35.47	-12.06	23.41	43.50	-20.09	Peak	
4	369.5000	29.70	-11.09	18.61	46.00	-27.39	Peak	
5	600.3600	29.44	-5.48	23.96	46.00	-22.04	Peak	
6	831.2199	31.55	0.60	32.15	46.00	-13.85	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: HUNTKEY)


Horizontal

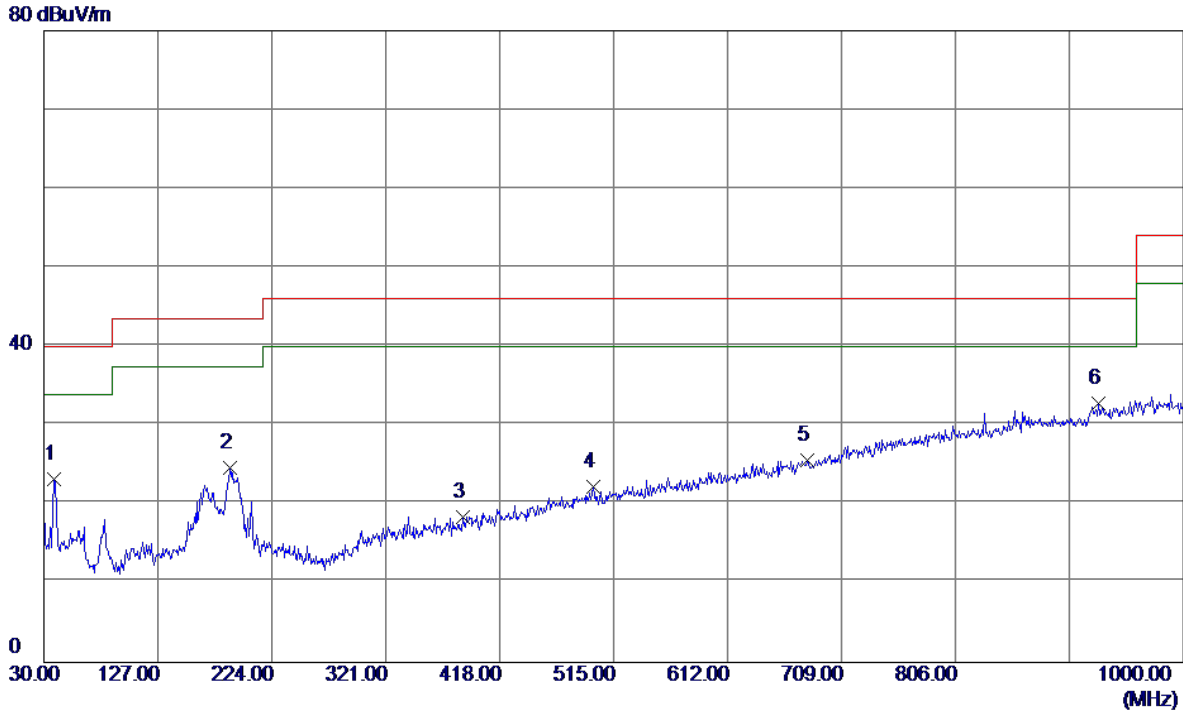

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38.7300	37.15	-13.93	23.22	40.00	-16.78	Peak	
2	188.1100	36.91	-12.29	24.62	43.50	-18.88	Peak	
3	386.9600	29.30	-10.87	18.43	46.00	-27.57	Peak	
4	497.5400	30.19	-7.99	22.20	46.00	-23.80	Peak	
5	679.9000	29.16	-3.56	25.60	46.00	-20.40	Peak	
6 *	928.2200	30.03	2.77	32.80	46.00	-13.20	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: HUNTKEY)


Vertical

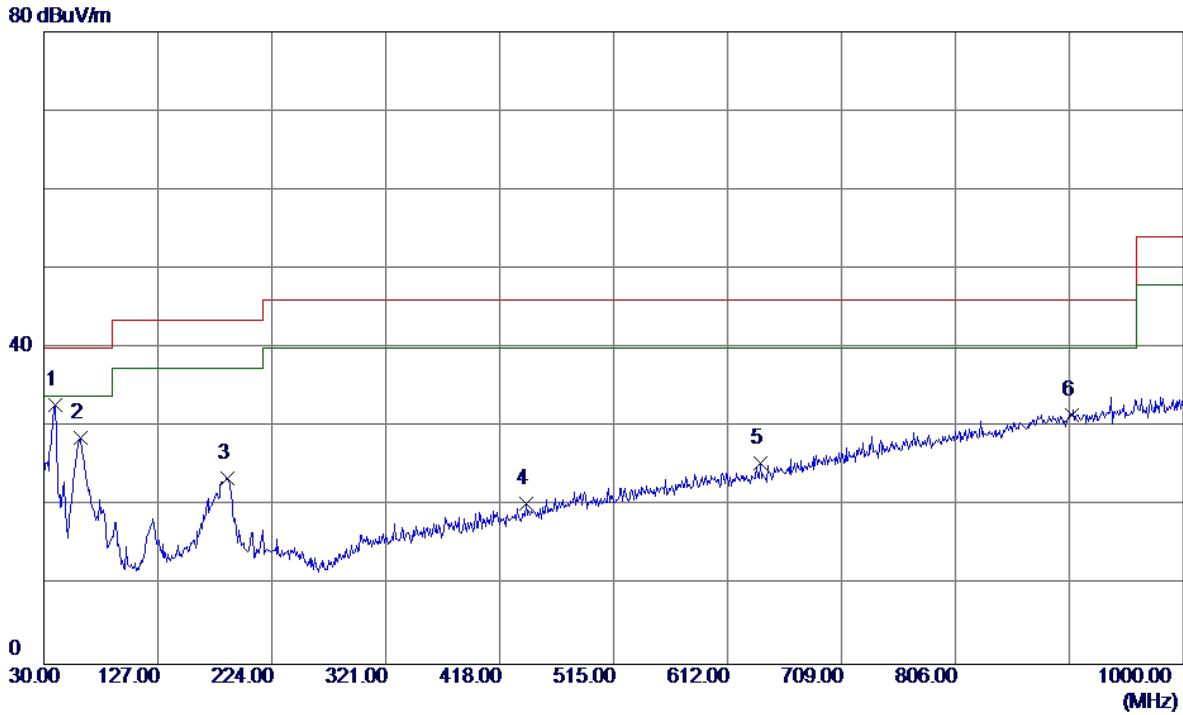

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	46.50	-13.77	32.73	40.00	-7.27	Peak	
2	61.0400	42.90	-14.20	28.70	40.00	-11.30	Peak	
3	186.1700	35.64	-12.14	23.50	43.50	-20.00	Peak	
4	440.3100	29.89	-9.50	20.39	46.00	-25.61	Peak	
5	640.1300	30.11	-4.70	25.41	46.00	-20.59	Peak	
6	904.9400	29.25	2.31	31.56	46.00	-14.44	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: HUNTKEY)


Horizontal

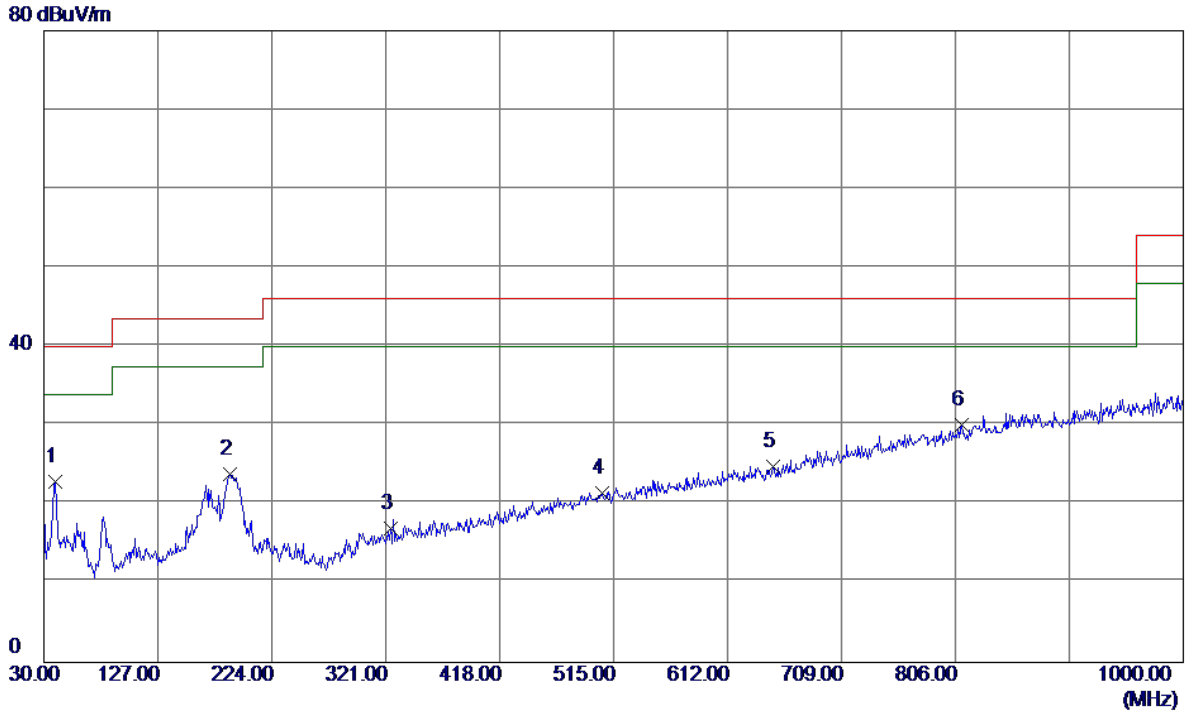

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39.7000	36.59	-13.77	22.82	40.00	-17.18	Peak	
2	188.1100	36.16	-12.29	23.87	43.50	-19.63	Peak	
3	324.8800	28.79	-11.81	16.98	46.00	-29.02	Peak	
4	505.3000	29.30	-7.82	21.48	46.00	-24.52	Peak	
5	650.8000	29.28	-4.48	24.80	46.00	-21.20	Peak	
6 *	811.8200	30.04	0.06	30.10	46.00	-15.90	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter: HUNTKEY)


Vertical

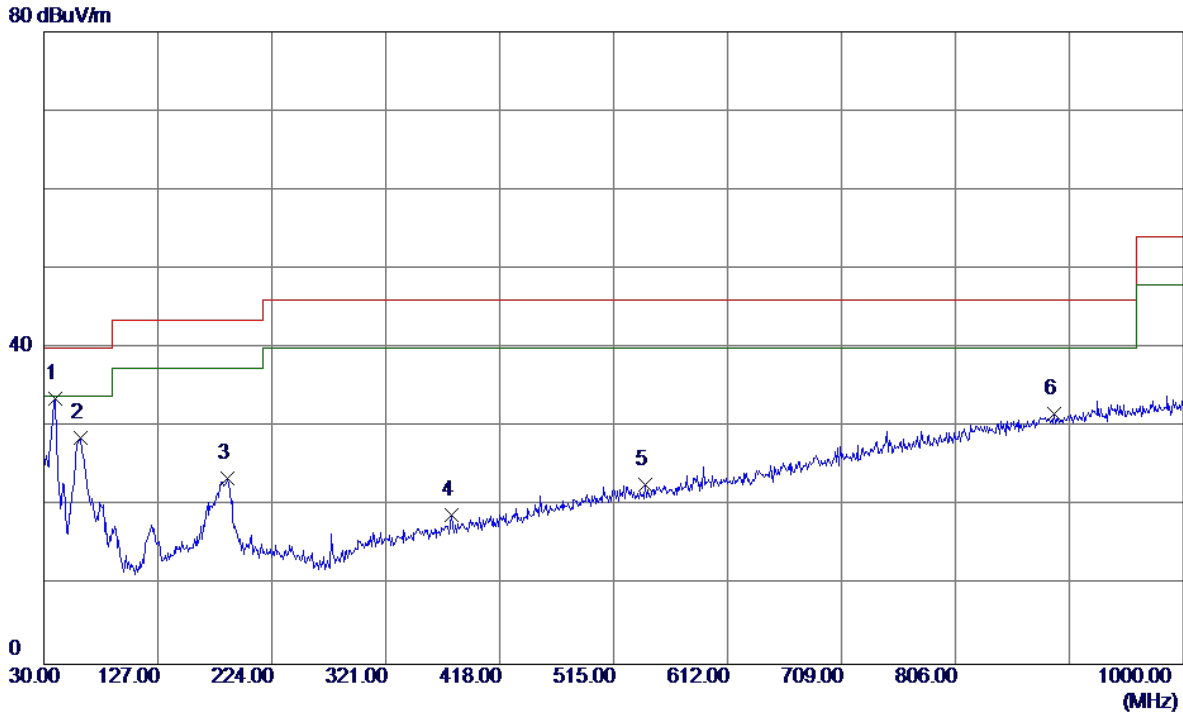

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	47.32	-13.77	33.55	40.00	-6.45	Peak	
2	61.0400	42.77	-14.20	28.57	40.00	-11.43	Peak	
3	186.1700	35.61	-12.14	23.47	43.50	-20.03	Peak	
4	377.2600	29.88	-10.99	18.89	46.00	-27.11	Peak	
5	542.1599	29.81	-7.03	22.78	46.00	-23.22	Peak	
6	890.3900	29.74	2.00	31.74	46.00	-14.26	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter: HUNTKEY)

Horizontal

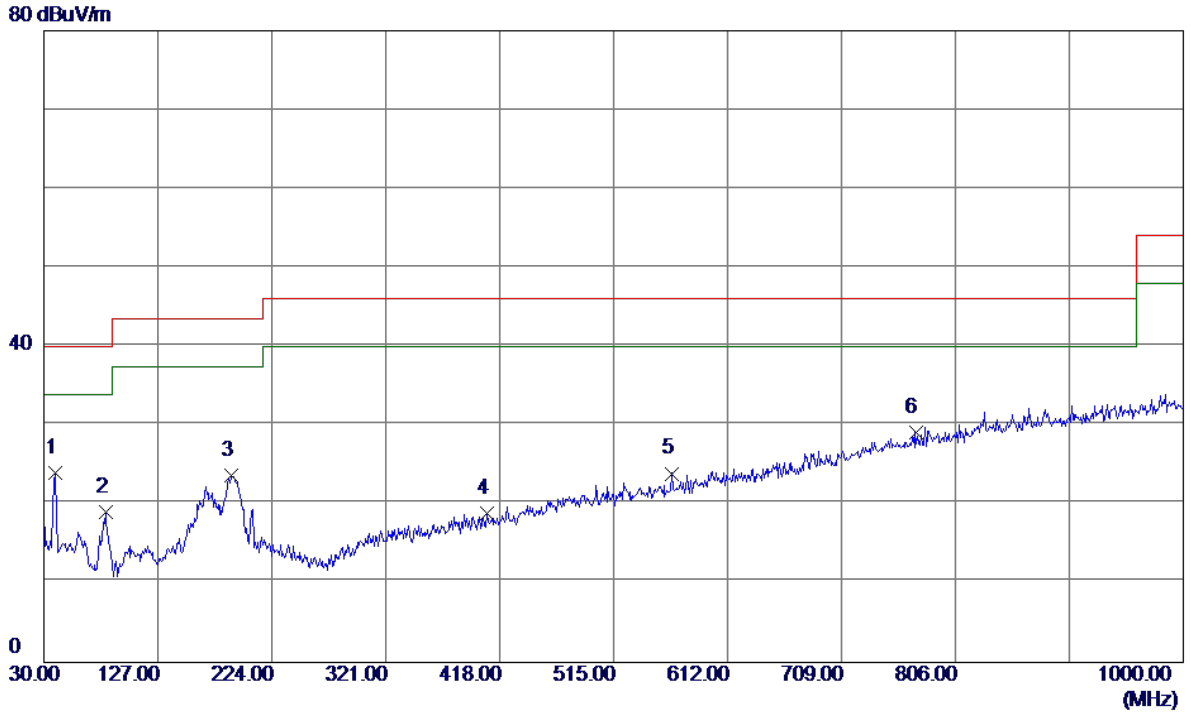


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	37.82	-13.77	24.05	40.00	-15.95	Peak	
2	82.3800	37.13	-18.02	19.11	40.00	-20.89	Peak	
3	189.0800	36.08	-12.37	23.71	43.50	-19.79	Peak	
4	407.3299	29.38	-10.48	18.90	46.00	-27.10	Peak	
5	564.4699	30.38	-6.46	23.92	46.00	-22.08	Peak	
6	772.0500	30.09	-0.90	29.19	46.00	-16.81	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter: HUNTKEY)

Vertical


80 dBuV/m

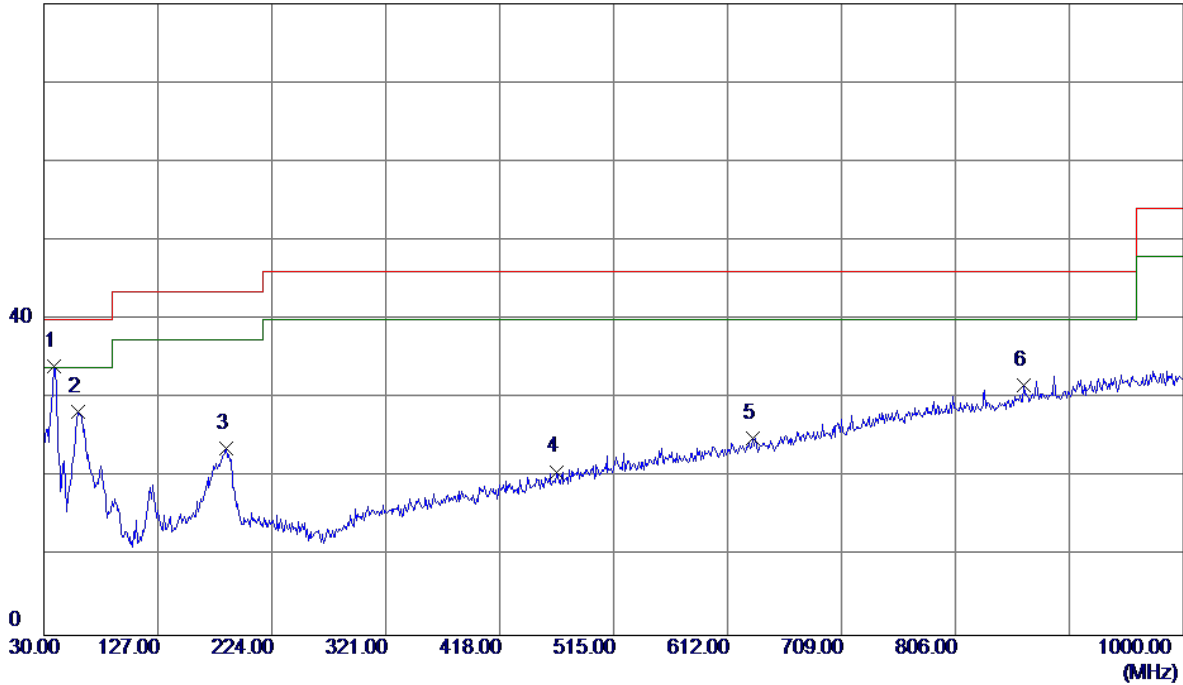

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	38.7300	48.04	-13.93	34.11	40.00	-5.89	Peak	
2	59.1000	42.29	-13.94	28.35	40.00	-11.65	Peak	
3	185.2000	35.75	-12.06	23.69	43.50	-19.81	Peak	
4	466.5000	29.51	-8.79	20.72	46.00	-25.28	Peak	
5	633.3400	29.85	-4.83	25.02	46.00	-20.98	Peak	
6	864.2000	30.32	1.43	31.75	46.00	-14.25	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter: HUNTKEY)

Horizontal

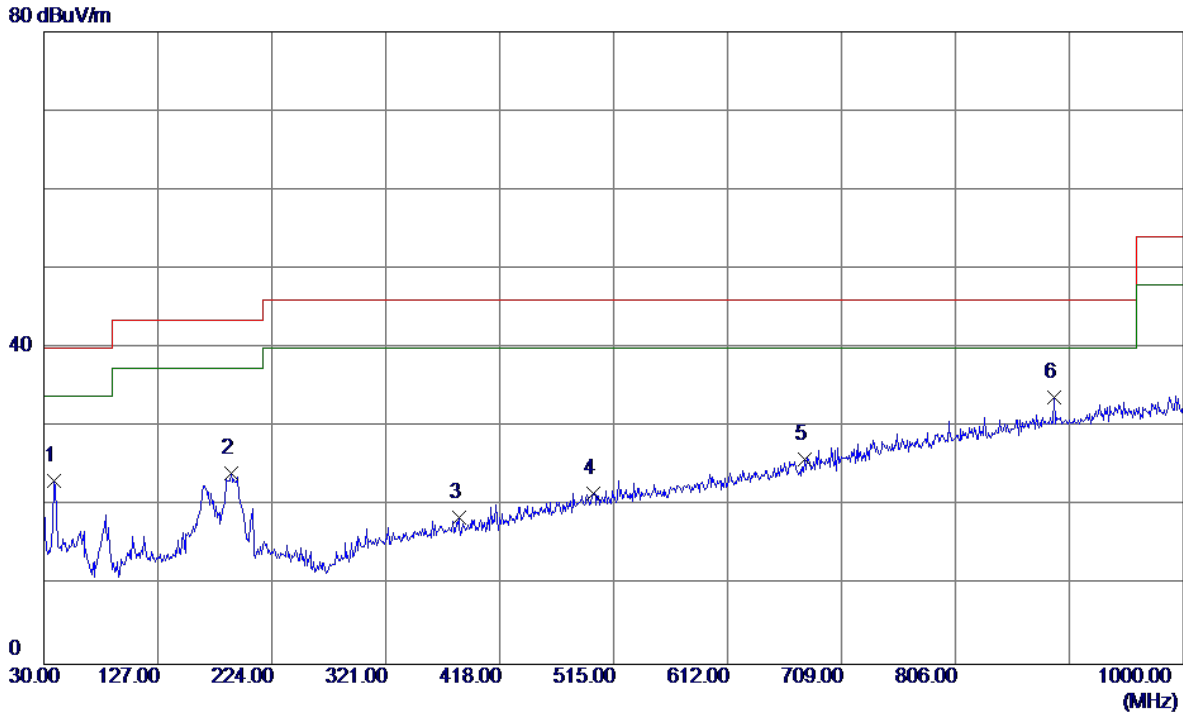


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38.7300	37.09	-13.93	23.16	40.00	-16.84	Peak	
2	189.0800	36.52	-12.37	24.15	43.50	-19.35	Peak	
3	383.0799	29.55	-10.92	18.63	46.00	-27.37	Peak	
4	497.5400	29.65	-7.99	21.66	46.00	-24.34	Peak	
5	677.9600	29.47	-3.62	25.85	46.00	-20.15	Peak	
6 *	890.3900	31.70	2.00	33.70	46.00	-12.30	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter: HUNTKEY)

Vertical


80 dBuV/m

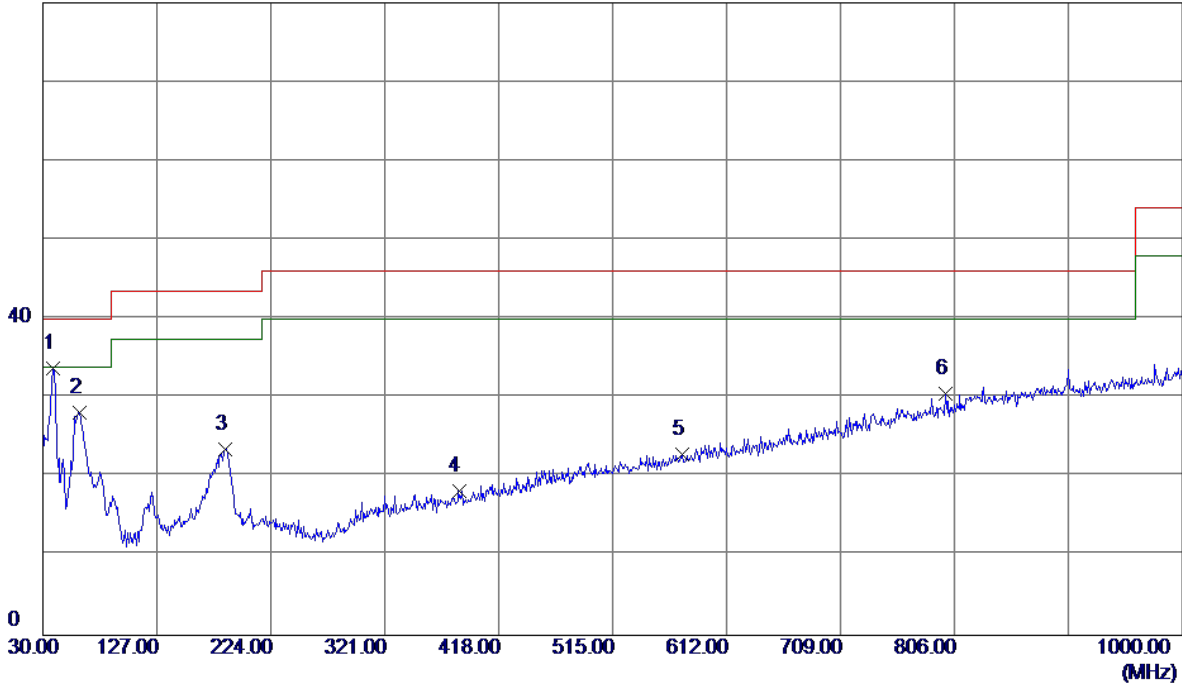

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	38.7300	47.62	-13.93	33.69	40.00	-6.31	Peak	
2	61.0400	42.37	-14.20	28.17	40.00	-11.83	Peak	
3	185.2000	35.64	-12.06	23.58	43.50	-19.92	Peak	
4	384.0500	29.19	-10.90	18.29	46.00	-27.71	Peak	
5	574.1700	29.04	-6.20	22.84	46.00	-23.16	Peak	
6	798.2400	30.88	-0.31	30.57	46.00	-15.43	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter: HUNTKEY)


Horizontal

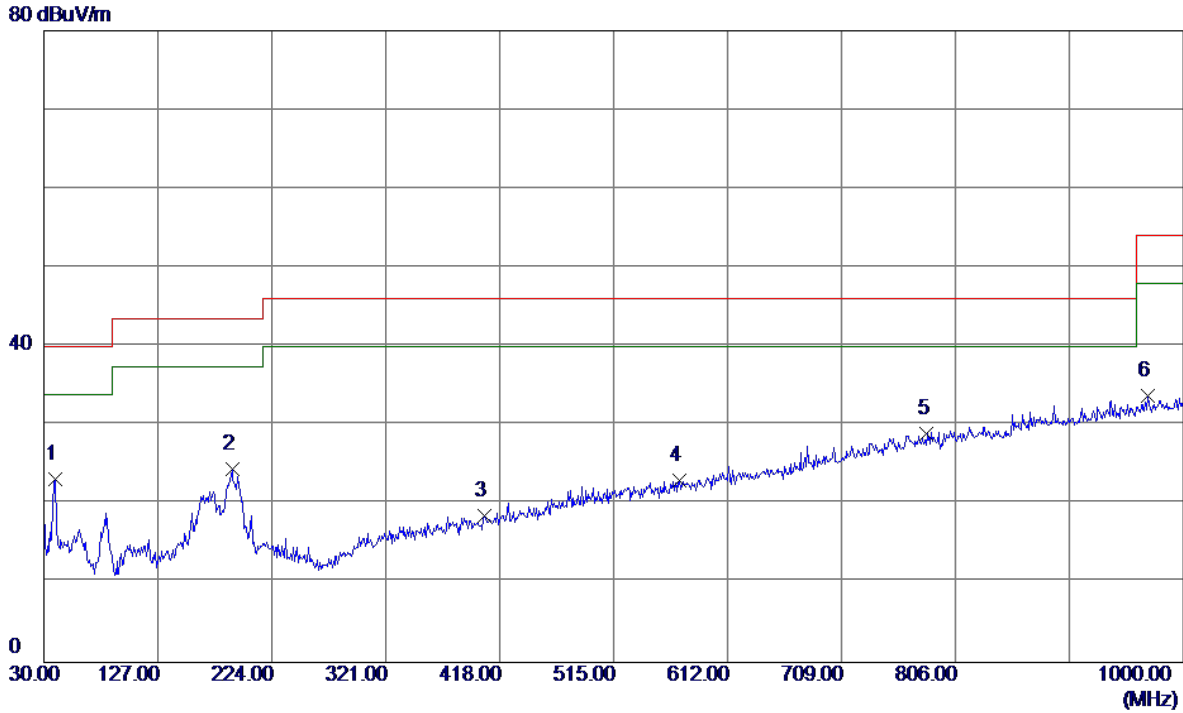

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	37.00	-13.77	23.23	40.00	-16.77	Peak	
2	190.0500	36.89	-12.45	24.44	43.50	-19.06	Peak	
3	405.3900	29.07	-10.54	18.53	46.00	-27.47	Peak	
4	571.2600	29.27	-6.28	22.99	46.00	-23.01	Peak	
5	781.7500	29.66	-0.68	28.98	46.00	-17.02	Peak	
6	969.9300	30.12	3.61	33.73	54.00	-20.27	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: HUNTKEY)


Vertical

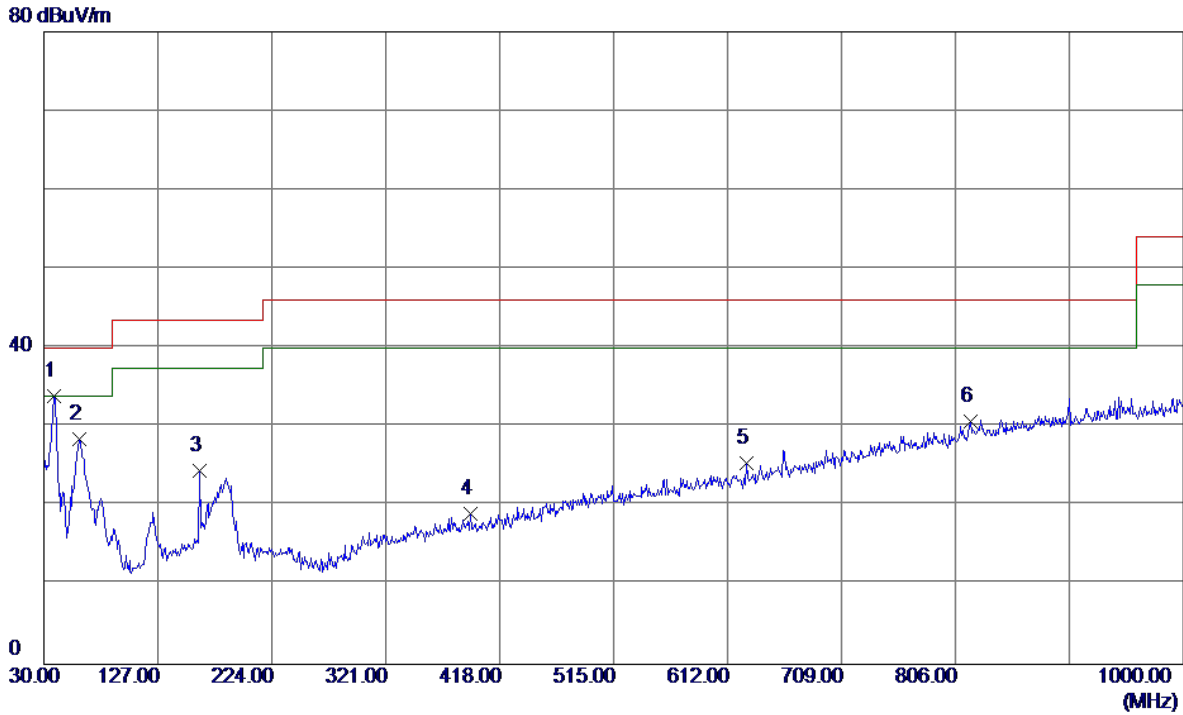

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	38.7300	47.81	-13.93	33.88	40.00	-6.12	Peak	
2	60.0700	42.45	-14.04	28.41	40.00	-11.59	Peak	
3	162.8900	36.87	-12.38	24.49	43.50	-19.01	Peak	
4	392.7800	29.82	-10.79	19.03	46.00	-26.97	Peak	
5	628.4900	30.43	-4.93	25.50	46.00	-20.50	Peak	
6	818.6100	30.44	0.25	30.69	46.00	-15.31	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: HUNTKEY)


Horizontal

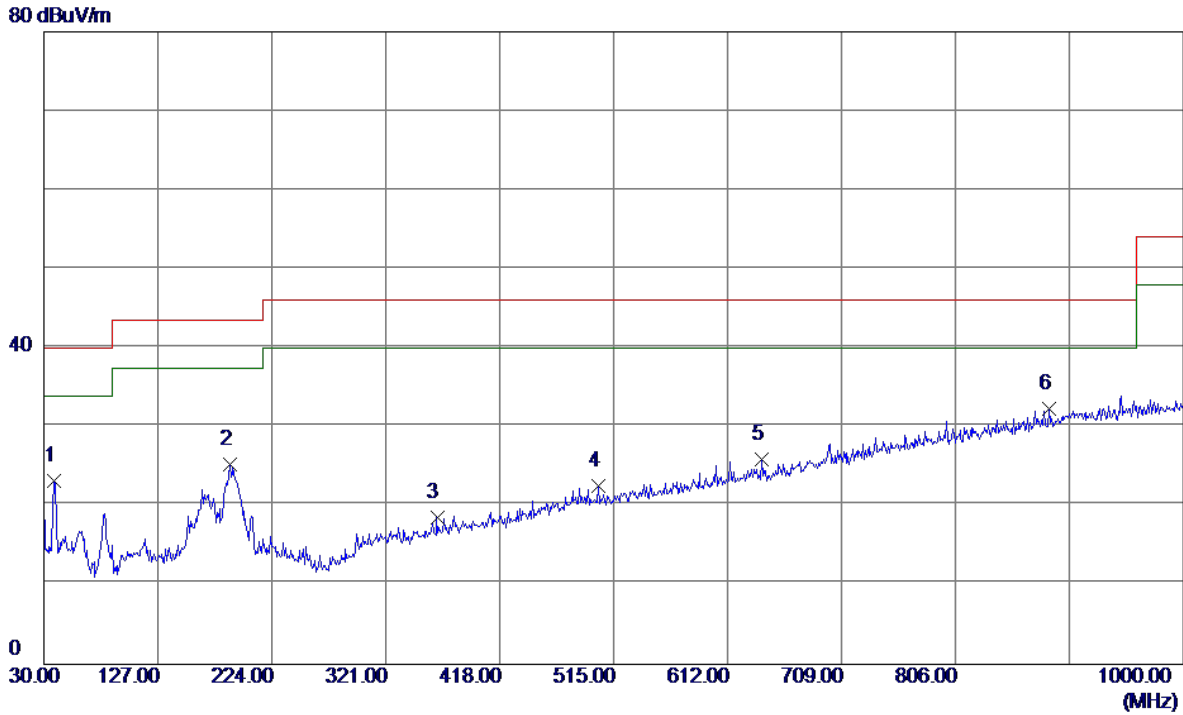

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38.7300	37.08	-13.93	23.15	40.00	-16.85	Peak	
2	188.1100	37.63	-12.29	25.34	43.50	-18.16	Peak	
3	364.6500	29.75	-11.15	18.60	46.00	-27.40	Peak	
4	502.3900	30.44	-7.88	22.56	46.00	-23.44	Peak	
5	641.1000	30.66	-4.68	25.98	46.00	-20.02	Peak	
6 *	885.5400	30.39	1.89	32.28	46.00	-13.72	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: HUNTKEY)


Vertical

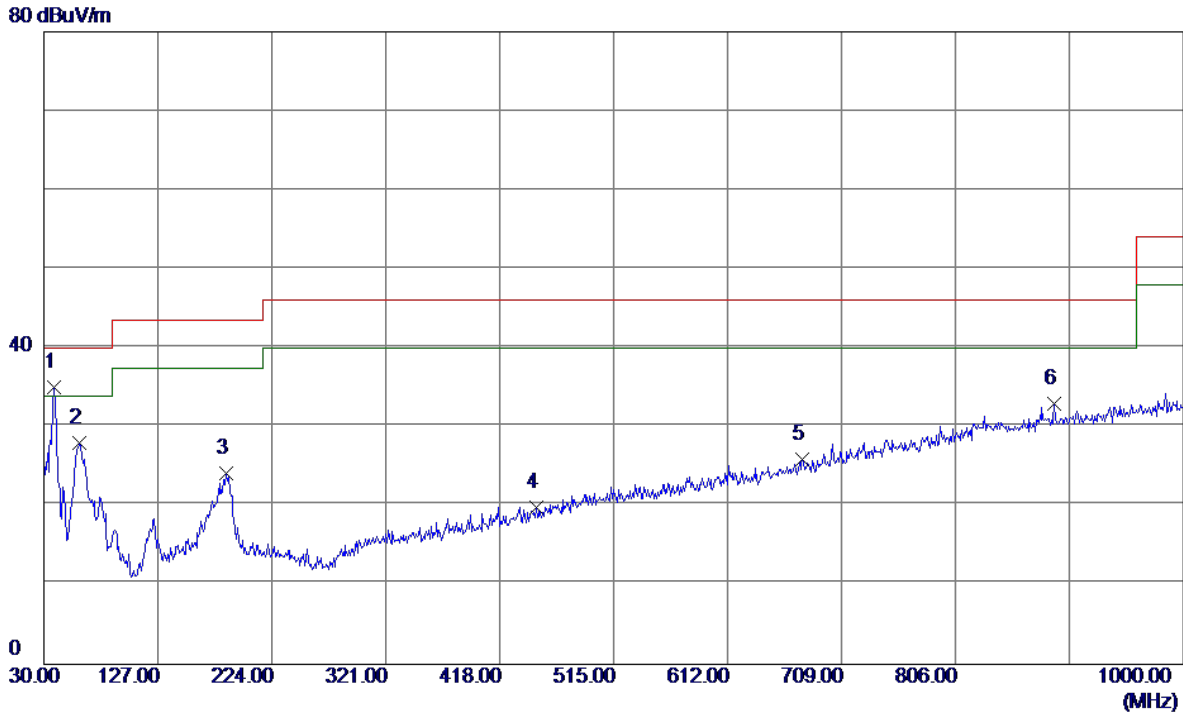

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	38.7300	48.96	-13.93	35.03	40.00	-4.97	Peak	
2	60.0700	41.98	-14.04	27.94	40.00	-12.06	Peak	
3	185.2000	36.25	-12.06	24.19	43.50	-19.31	Peak	
4	449.0400	29.10	-9.24	19.86	46.00	-26.14	Peak	
5	676.0200	29.54	-3.68	25.86	46.00	-20.14	Peak	
6	890.3900	30.90	2.00	32.90	46.00	-13.10	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: HUNTKEY)


Horizontal

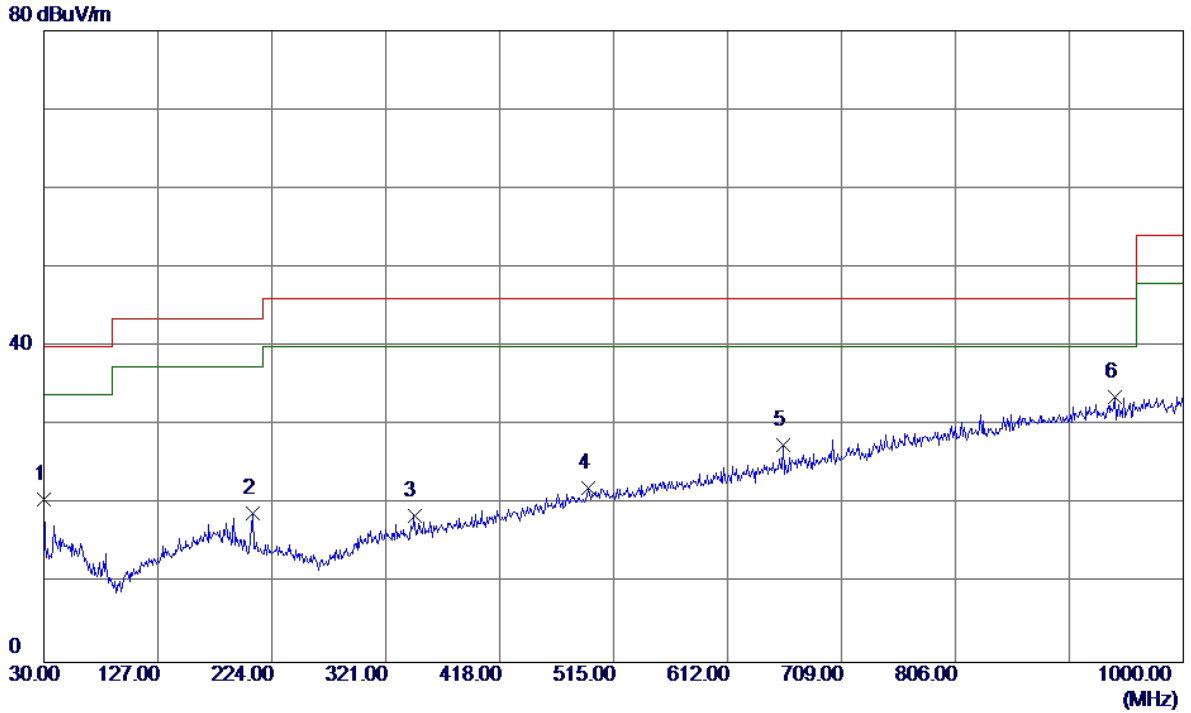

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	35.62	-15.04	20.58	40.00	-19.42	Peak	
2	207.5100	32.34	-13.50	18.84	43.50	-24.66	Peak	
3	345.2500	30.05	-11.43	18.62	46.00	-27.38	Peak	
4	493.6600	30.17	-8.09	22.08	46.00	-23.92	Peak	
5	659.5300	31.75	-4.20	27.55	46.00	-18.45	Peak	
6 *	941.8000	30.57	3.05	33.62	46.00	-12.38	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: HUNTKEY)


Vertical

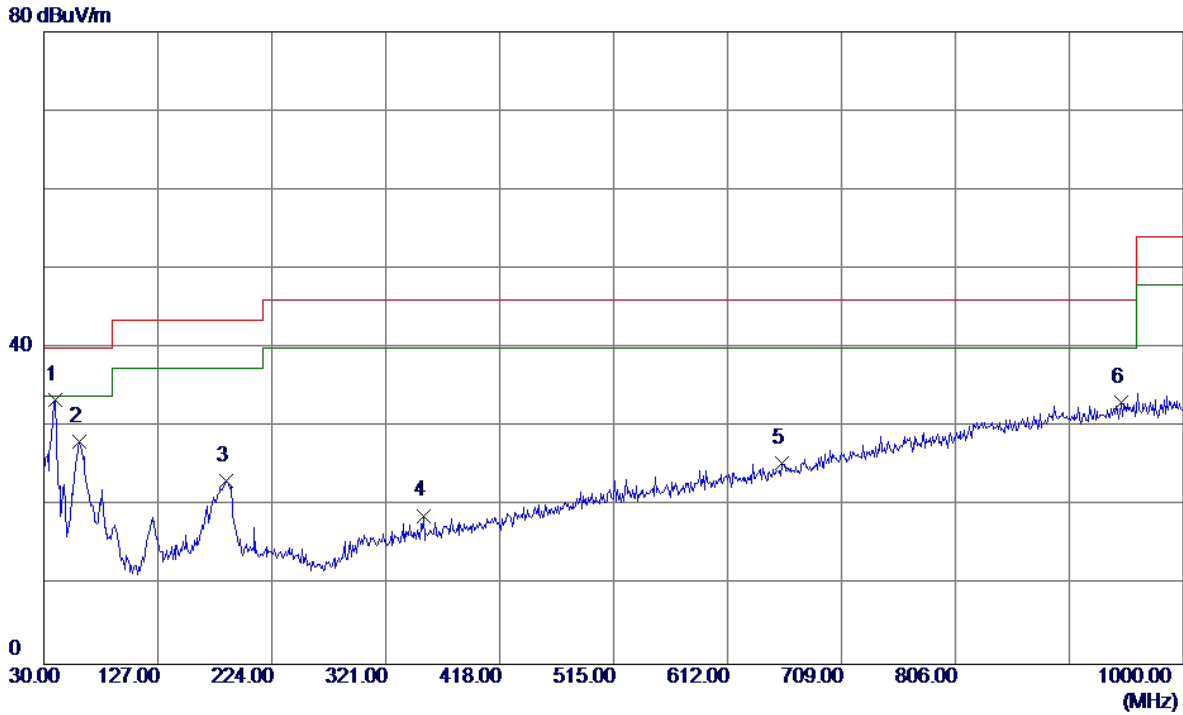

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	47.20	-13.77	33.43	40.00	-6.57	Peak	
2	60.0700	42.15	-14.04	28.11	40.00	-11.89	Peak	
3	185.2000	35.33	-12.06	23.27	43.50	-20.23	Peak	
4	353.0100	30.10	-11.30	18.80	46.00	-27.20	Peak	
5	658.5600	29.65	-4.23	25.42	46.00	-20.58	Peak	
6	947.6200	29.91	3.16	33.07	46.00	-12.93	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: HUNTKEY)


Horizontal

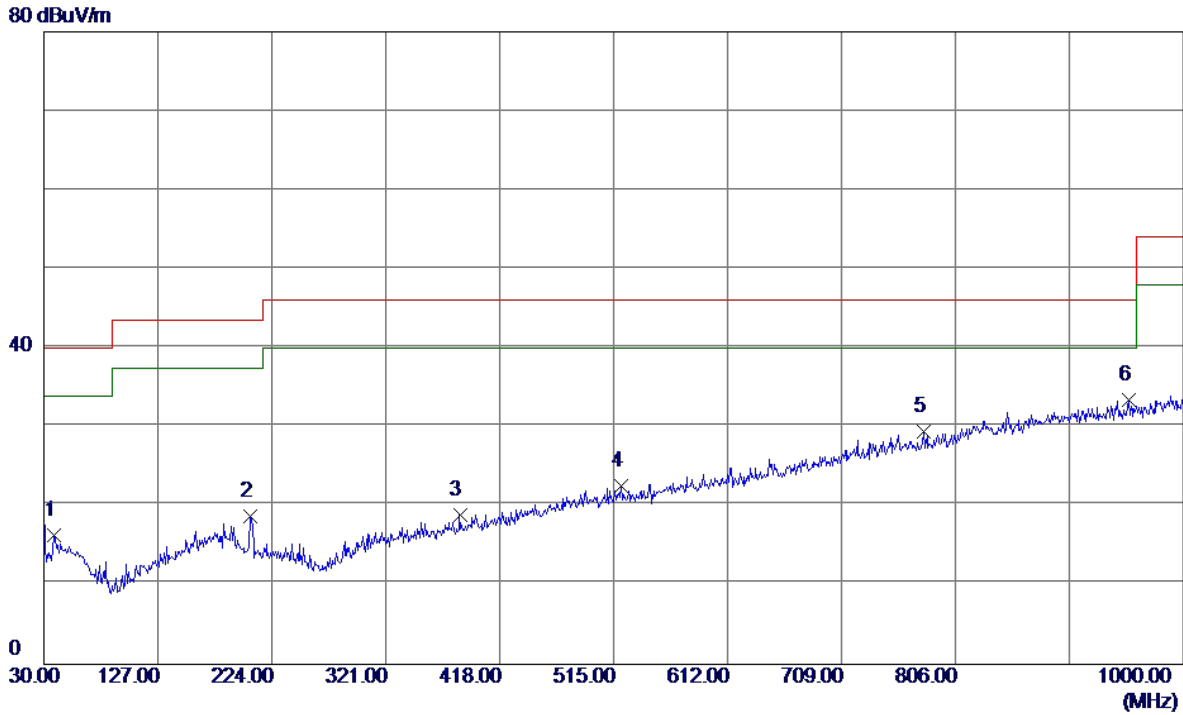

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38.7300	30.31	-13.93	16.38	40.00	-23.62	Peak	
2	205.5700	32.11	-13.46	18.65	43.50	-24.85	Peak	
3	384.0500	29.80	-10.90	18.90	46.00	-27.10	Peak	
4	521.7900	30.03	-7.46	22.57	46.00	-23.43	Peak	
5	778.8400	30.16	-0.75	29.41	46.00	-16.59	Peak	
6 *	953.4400	30.10	3.28	33.38	46.00	-12.62	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: BYD)


Vertical

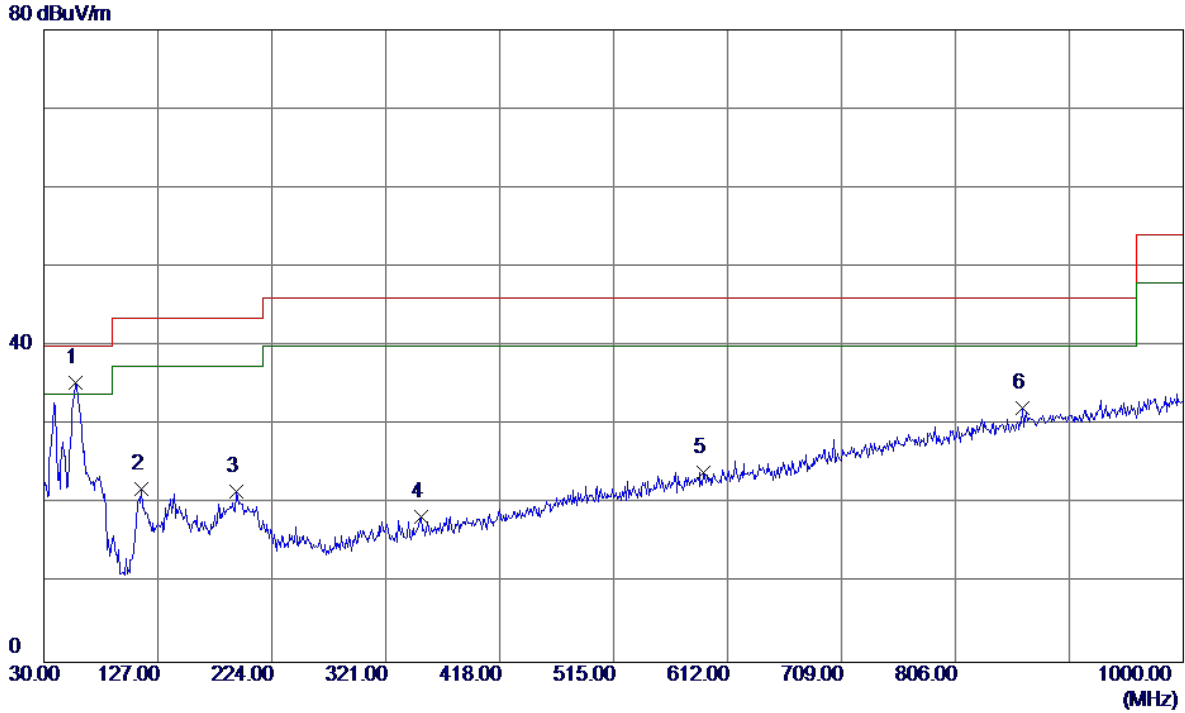

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.08	-13.77	35.31	40.00	-4.69	Peak	
2	113.4200	37.53	-15.59	21.94	43.50	-21.56	Peak	
3	193.9299	34.43	-12.80	21.63	43.50	-21.87	Peak	
4	351.0700	29.69	-11.33	18.36	46.00	-27.64	Peak	
5	591.6300	29.72	-5.72	24.00	46.00	-22.00	Peak	
6	863.2300	30.82	1.41	32.23	46.00	-13.77	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: BYD)


Horizontal

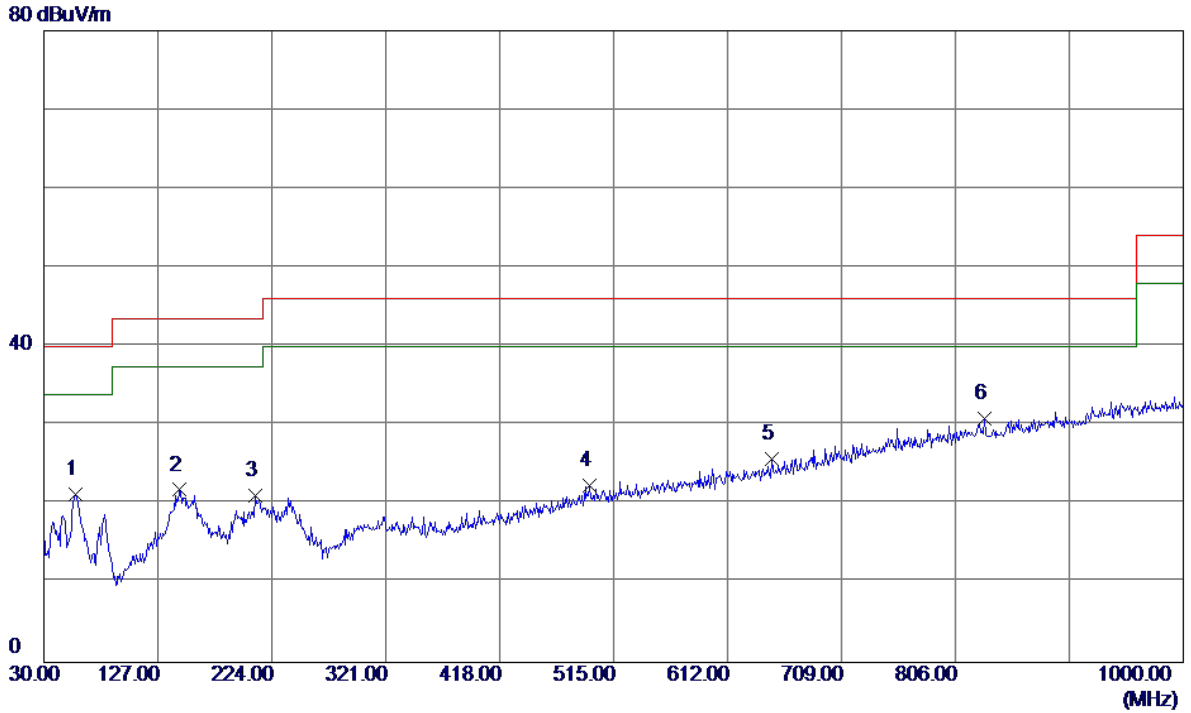

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	57.1600	35.00	-13.77	21.23	40.00	-18.77	Peak	
2	145.4299	35.32	-13.48	21.84	43.50	-21.66	Peak	
3	210.4200	34.71	-13.55	21.16	43.50	-22.34	Peak	
4	494.6300	30.50	-8.07	22.43	46.00	-23.57	Peak	
5	649.8300	30.20	-4.51	25.69	46.00	-20.31	Peak	
6 *	831.2199	30.23	0.60	30.83	46.00	-15.17	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: BYD)


Vertical

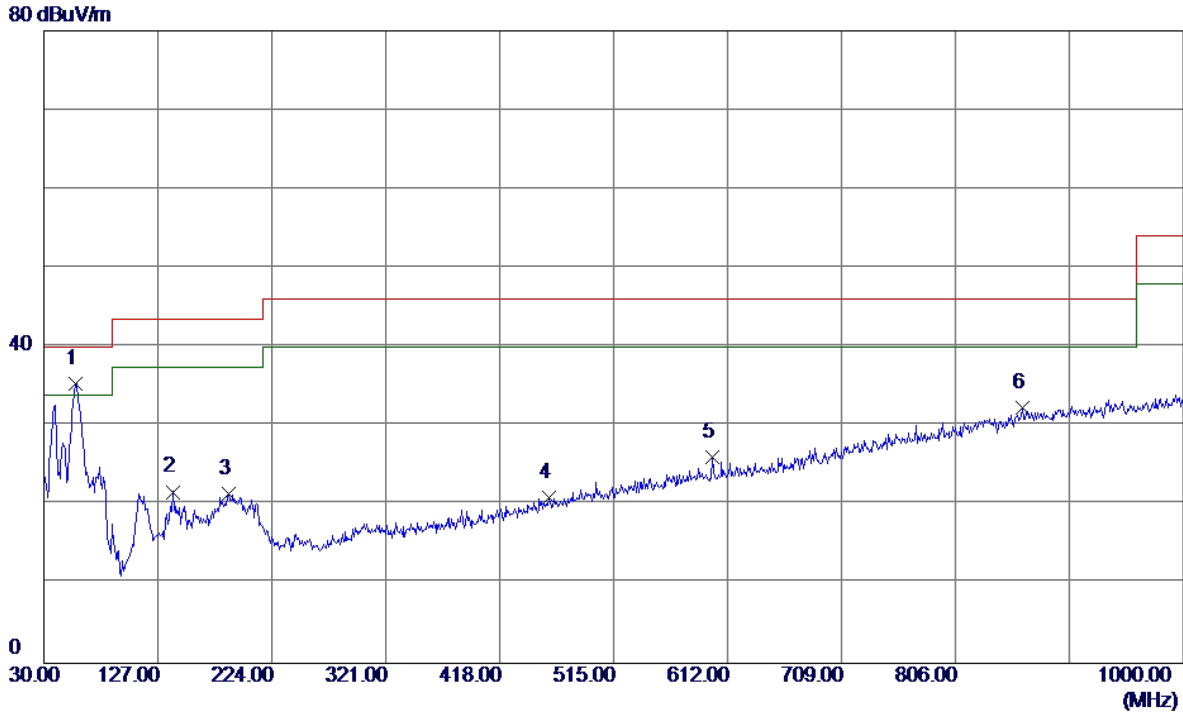

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.20	-13.77	35.43	40.00	-4.57	Peak	
2	139.6100	35.56	-13.88	21.68	43.50	-21.82	Peak	
3	187.1400	33.69	-12.22	21.47	43.50	-22.03	Peak	
4	459.7100	29.98	-8.97	21.01	46.00	-24.99	Peak	
5	599.3900	31.59	-5.51	26.08	46.00	-19.92	Peak	
6	863.2300	30.92	1.41	32.33	46.00	-13.67	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: BYD)


Horizontal

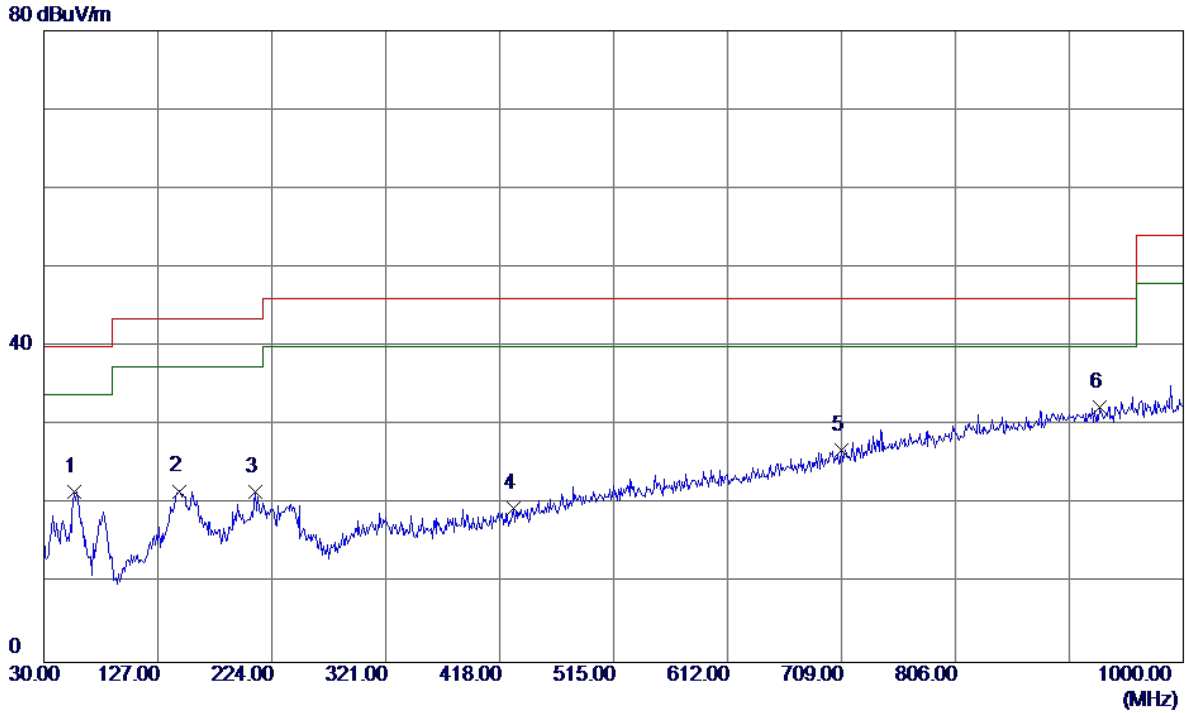

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	56.1900	35.32	-13.68	21.64	40.00	-18.36	Peak	
2	145.4299	35.16	-13.48	21.68	43.50	-21.82	Peak	
3	210.4200	35.22	-13.55	21.67	43.50	-21.83	Peak	
4	429.6400	29.34	-9.82	19.52	46.00	-26.48	Peak	
5	709.0000	29.46	-2.65	26.81	46.00	-19.19	Peak	
6 *	929.1900	29.55	2.79	32.34	46.00	-13.66	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter: BYD)


Vertical

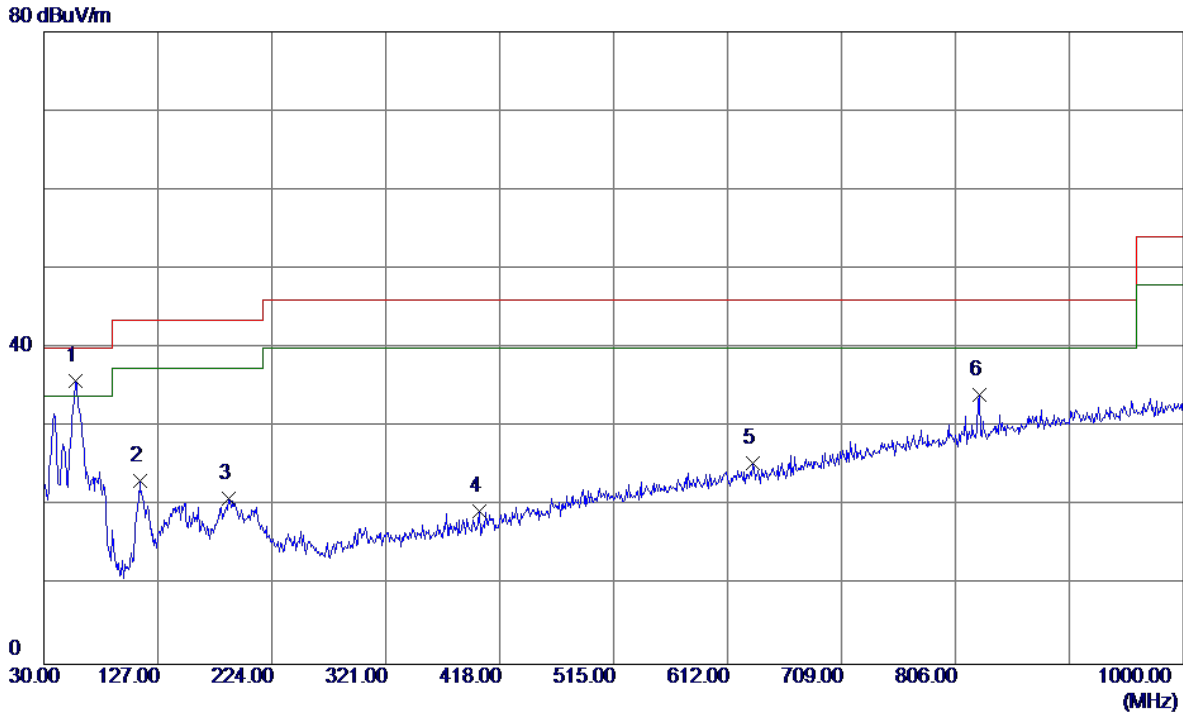

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.63	-13.77	35.86	40.00	-4.14	Peak	
2	111.4800	38.95	-15.74	23.21	43.50	-20.29	Peak	
3	187.1400	33.15	-12.22	20.93	43.50	-22.57	Peak	
4	400.5400	29.97	-10.68	19.29	46.00	-26.71	Peak	
5	633.3400	30.21	-4.83	25.38	46.00	-20.62	Peak	
6	826.3700	33.64	0.46	34.10	46.00	-11.90	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter: BYD)


Horizontal

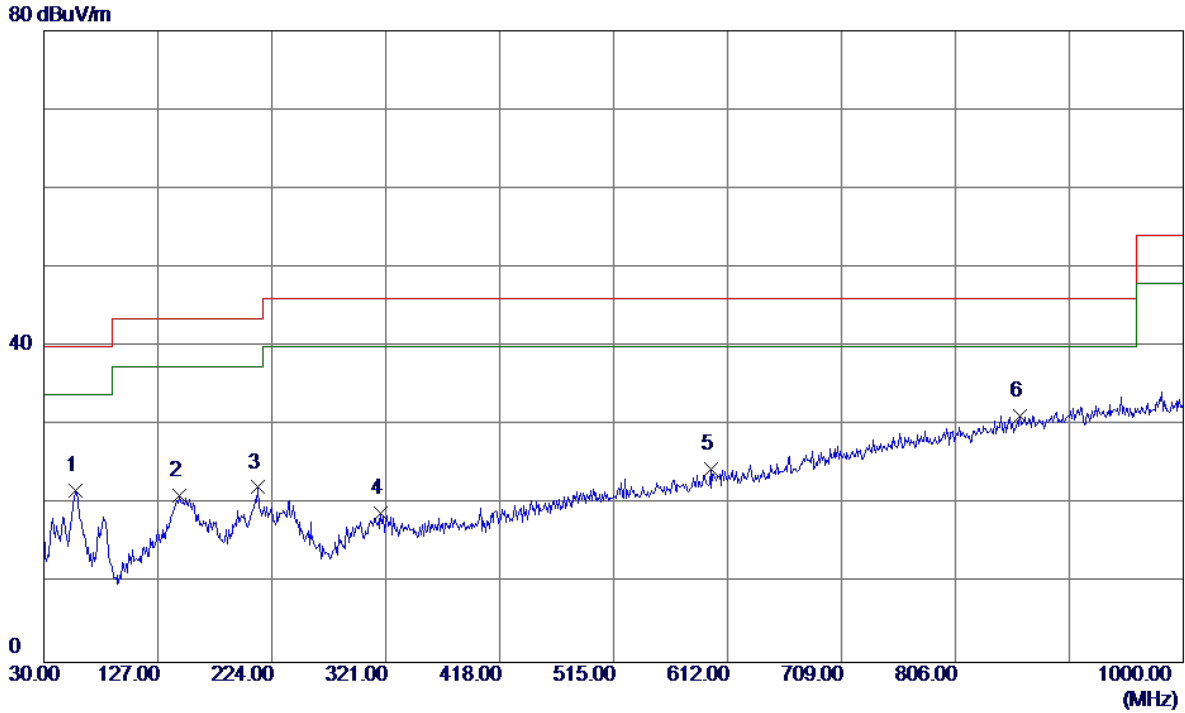

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	57.1600	35.48	-13.77	21.71	40.00	-18.29	Peak	
2	145.4299	34.59	-13.48	21.11	43.50	-22.39	Peak	
3	212.3600	35.69	-13.53	22.16	43.50	-21.34	Peak	
4	317.1200	30.80	-11.96	18.84	46.00	-27.16	Peak	
5	597.4500	30.00	-5.56	24.44	46.00	-21.56	Peak	
6 *	861.2900	29.88	1.37	31.25	46.00	-14.75	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter: BYD)


Vertical

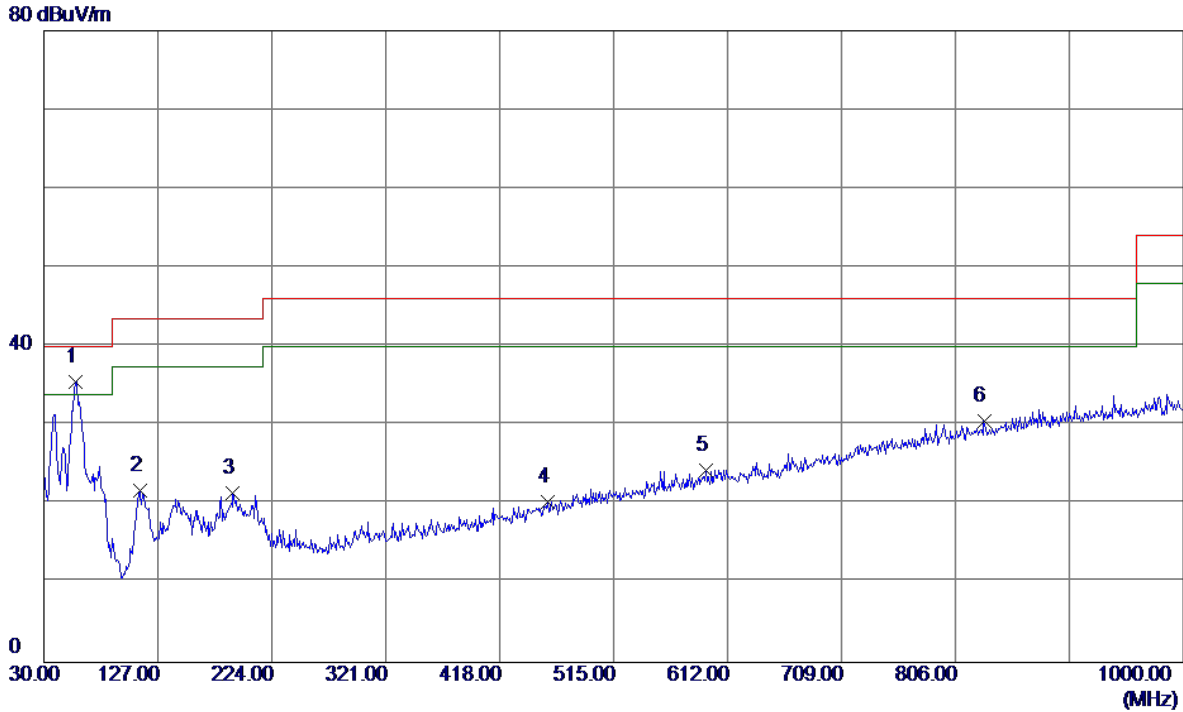

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.32	-13.77	35.55	40.00	-4.45	Peak	
2	111.4800	37.50	-15.74	21.76	43.50	-21.74	Peak	
3	191.0200	33.91	-12.53	21.38	43.50	-22.12	Peak	
4	458.7400	29.32	-8.99	20.33	46.00	-25.67	Peak	
5	593.5700	30.03	-5.67	24.36	46.00	-21.64	Peak	
6	830.2500	29.96	0.57	30.53	46.00	-15.47	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter: BYD)


Horizontal

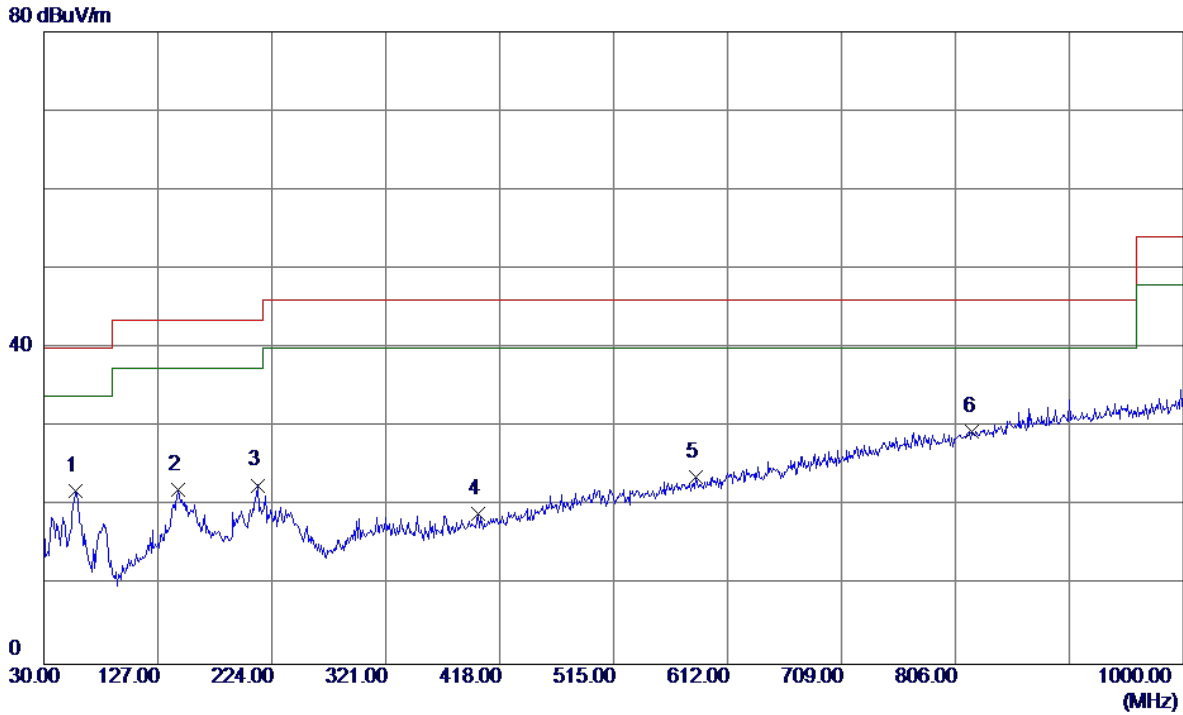

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	57.1600	35.71	-13.77	21.94	40.00	-18.06	Peak	
2	144.4600	35.59	-13.54	22.05	43.50	-21.45	Peak	
3	212.3600	36.17	-13.53	22.64	43.50	-20.86	Peak	
4	399.5700	29.70	-10.71	18.99	46.00	-27.01	Peak	
5	584.8400	29.66	-5.91	23.75	46.00	-22.25	Peak	
6 *	820.5500	29.14	0.30	29.44	46.00	-16.56	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter: BYD)


Vertical

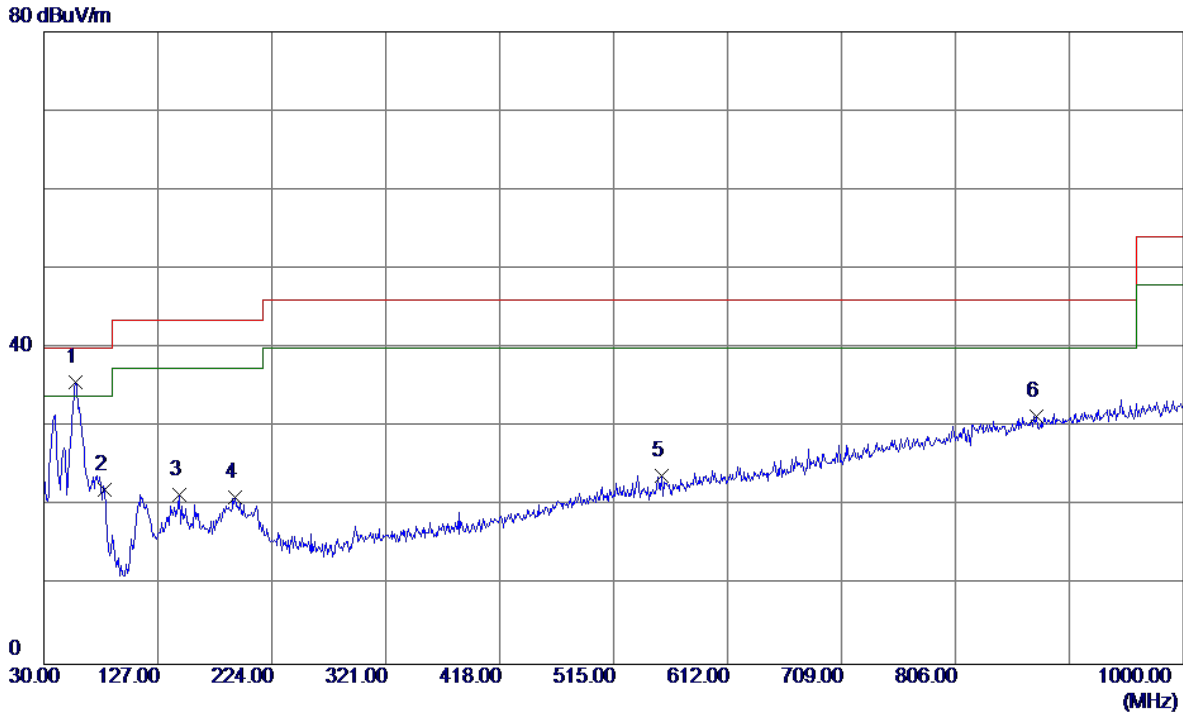

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.45	-13.77	35.68	40.00	-4.32	Peak	
2	81.4100	40.03	-17.99	22.04	40.00	-17.96	Peak	
3	145.4299	34.95	-13.48	21.47	43.50	-22.03	Peak	
4	192.9600	33.84	-12.71	21.13	43.50	-22.37	Peak	
5	555.7400	30.58	-6.70	23.88	46.00	-22.12	Peak	
6	874.8700	29.73	1.66	31.39	46.00	-14.61	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter: BYD)


Horizontal

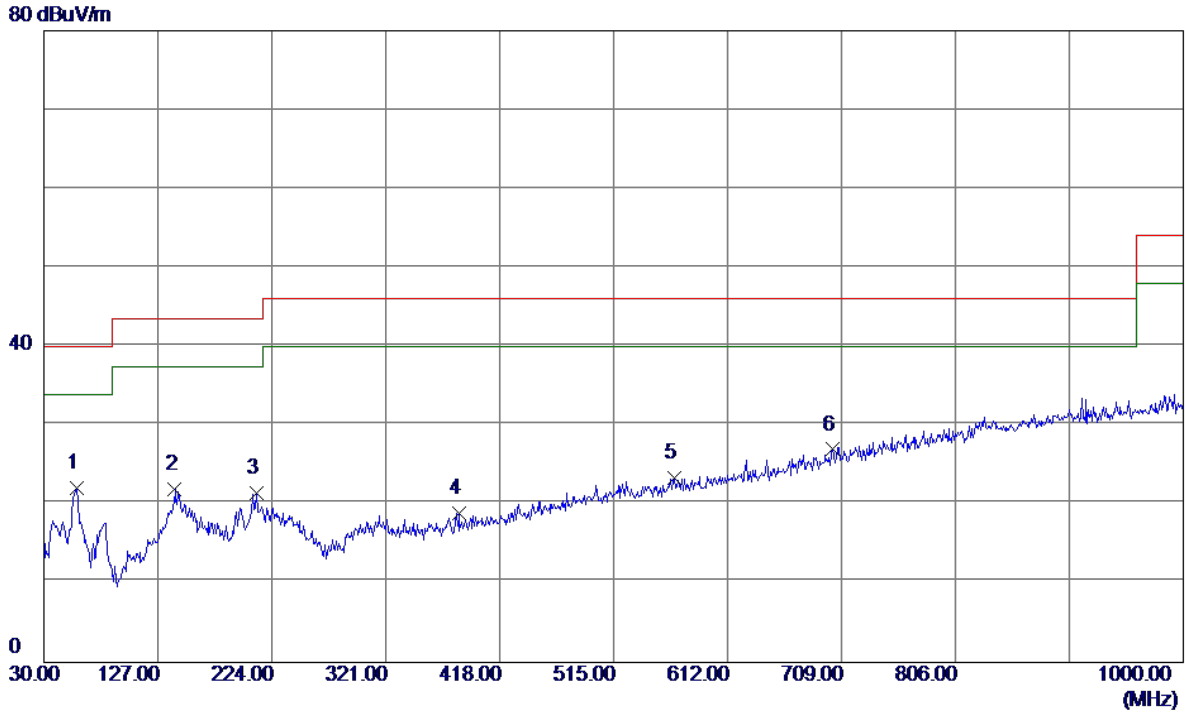

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	35.98	-13.86	22.12	40.00	-17.88	Peak	
2	141.5500	35.63	-13.75	21.88	43.50	-21.62	Peak	
3	211.3900	34.96	-13.54	21.42	43.50	-22.08	Peak	
4	383.0799	29.84	-10.92	18.92	46.00	-27.08	Peak	
5	566.4099	29.83	-6.41	23.42	46.00	-22.58	Peak	
6	701.2400	29.84	-2.88	26.96	46.00	-19.04	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: BYD)


Vertical

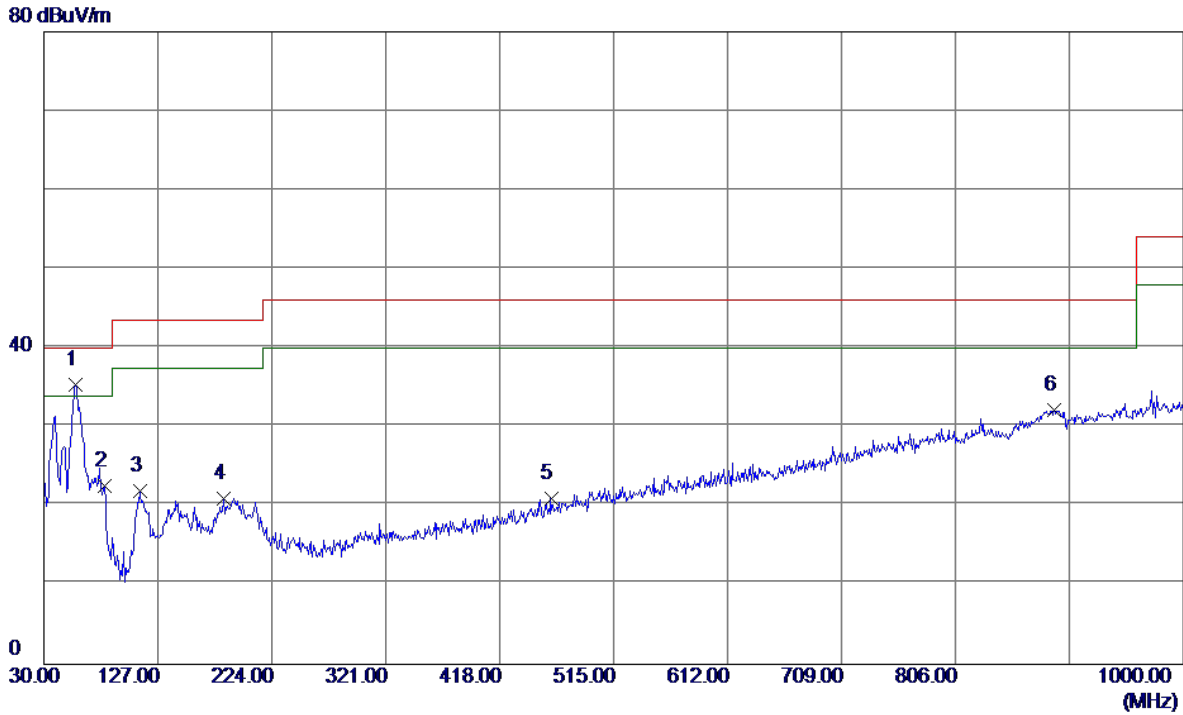

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.14	-13.77	35.37	40.00	-4.63	Peak	
2	81.4100	40.61	-17.99	22.62	40.00	-17.38	Peak	
3	111.4800	37.71	-15.74	21.97	43.50	-21.53	Peak	
4	183.2600	32.90	-11.91	20.99	43.50	-22.51	Peak	
5	461.6500	29.93	-8.92	21.01	46.00	-24.99	Peak	
6	890.3900	30.18	2.00	32.18	46.00	-13.82	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: BYD)


Horizontal

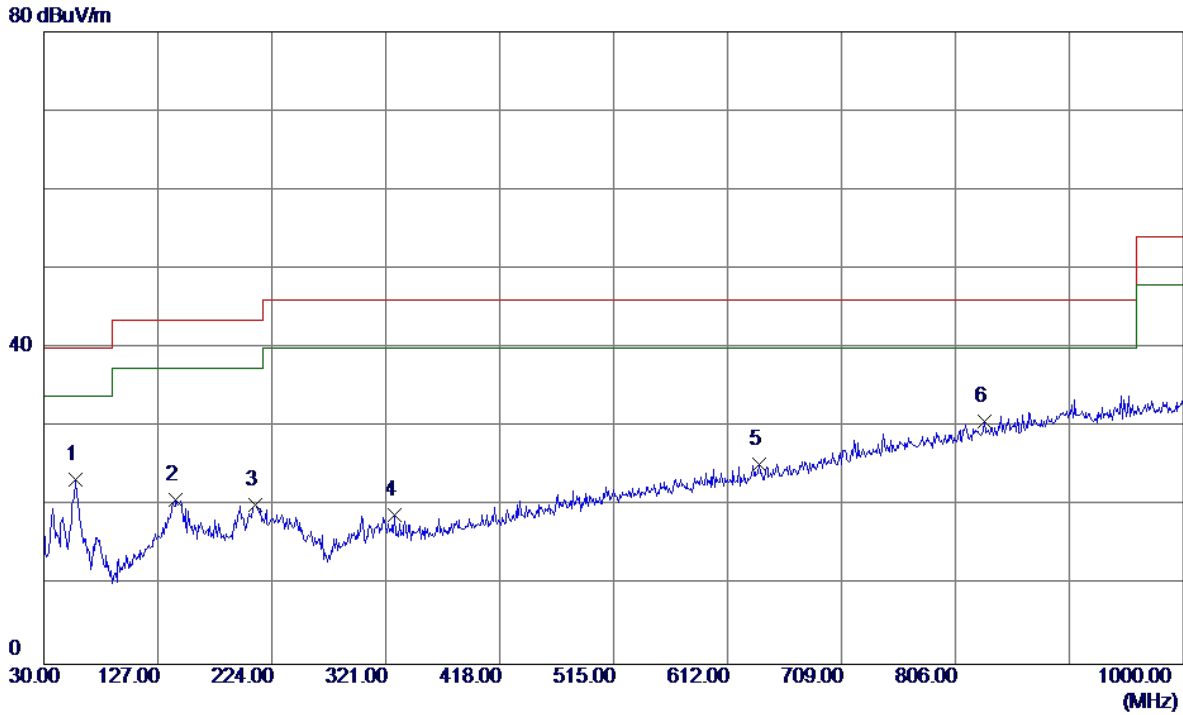

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	57.1600	37.10	-13.77	23.33	40.00	-16.67	Peak	
2	142.5200	34.47	-13.68	20.79	43.50	-22.71	Peak	
3	210.4200	33.67	-13.55	20.12	43.50	-23.38	Peak	
4	328.7600	30.63	-11.74	18.89	46.00	-27.11	Peak	
5	639.1599	30.03	-4.72	25.31	46.00	-20.69	Peak	
6 *	831.2199	30.08	0.60	30.68	46.00	-15.32	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: BYD)


Vertical

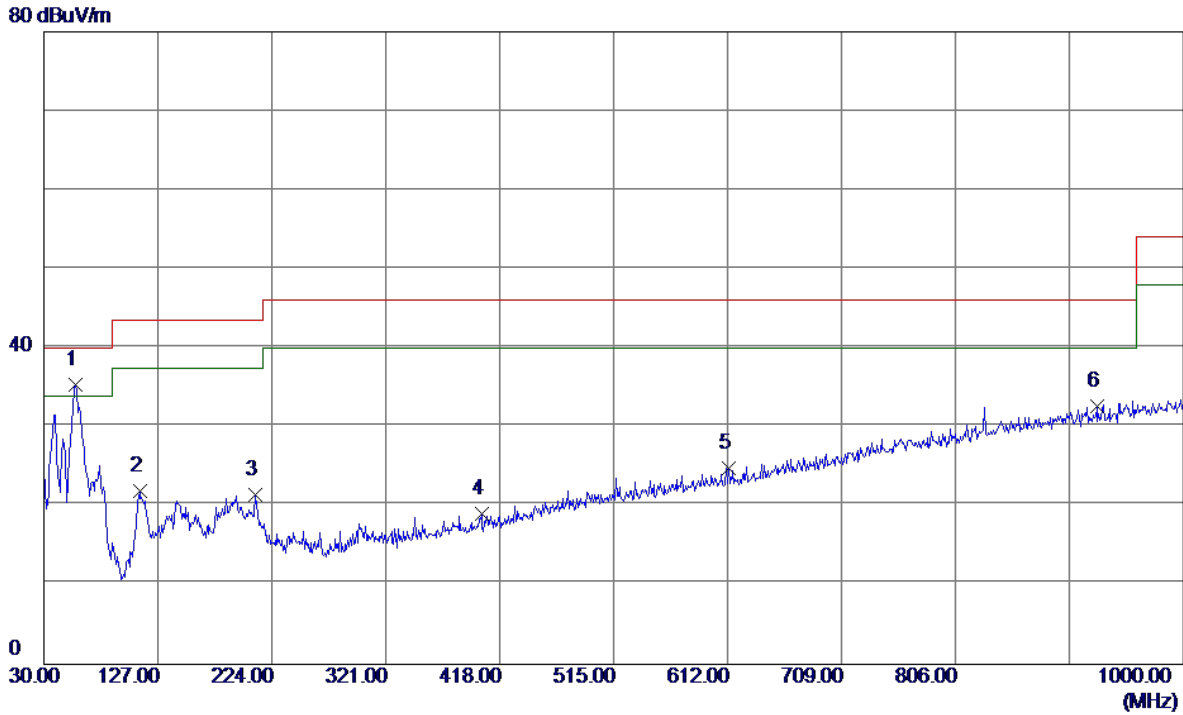

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.16	-13.77	35.39	40.00	-4.61	Peak	
2	111.4800	37.70	-15.74	21.96	43.50	-21.54	Peak	
3	210.4200	35.02	-13.55	21.47	43.50	-22.03	Peak	
4	402.4800	29.64	-10.63	19.01	46.00	-26.99	Peak	
5	612.9699	29.98	-5.23	24.75	46.00	-21.25	Peak	
6	926.2800	29.92	2.74	32.66	46.00	-13.34	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: BYD)


Horizontal

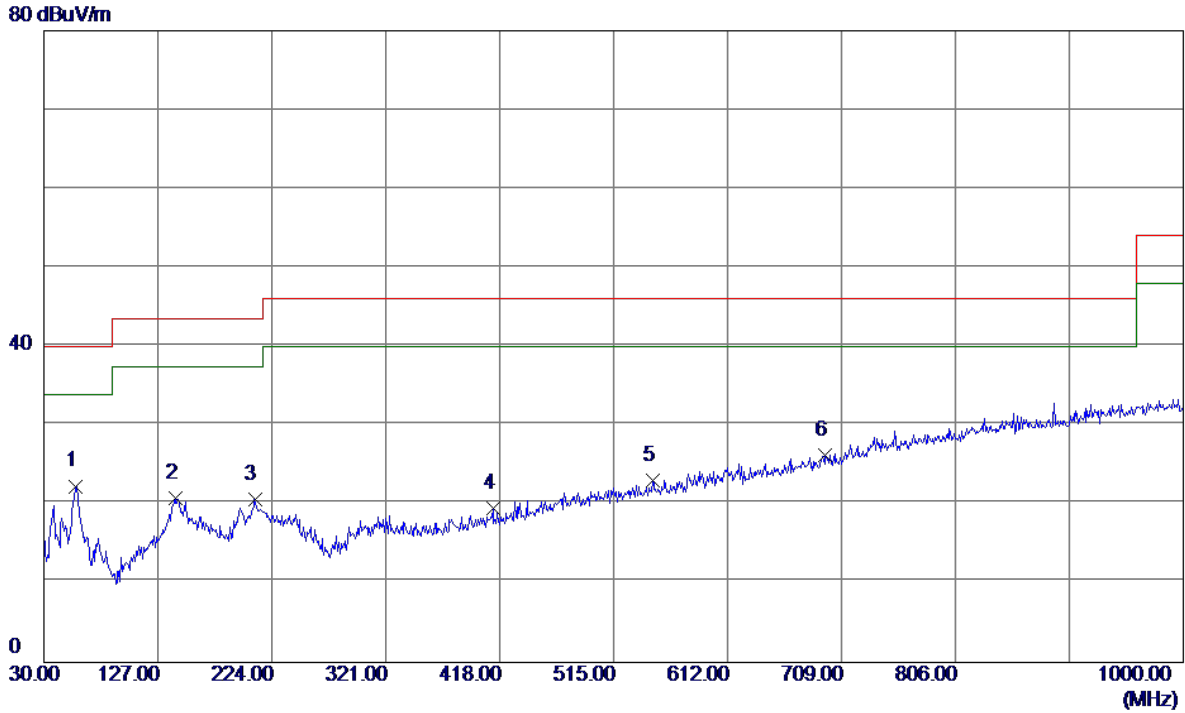

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	36.09	-13.77	22.32	40.00	-17.68	Peak	
2	142.5200	34.53	-13.68	20.85	43.50	-22.65	Peak	
3	209.4500	34.18	-13.54	20.64	43.50	-22.86	Peak	
4	412.1800	29.87	-10.34	19.53	46.00	-26.47	Peak	
5	547.9800	29.96	-6.90	23.06	46.00	-22.94	Peak	
6	695.4200	29.25	-3.07	26.18	46.00	-19.82	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: BYD)


Vertical

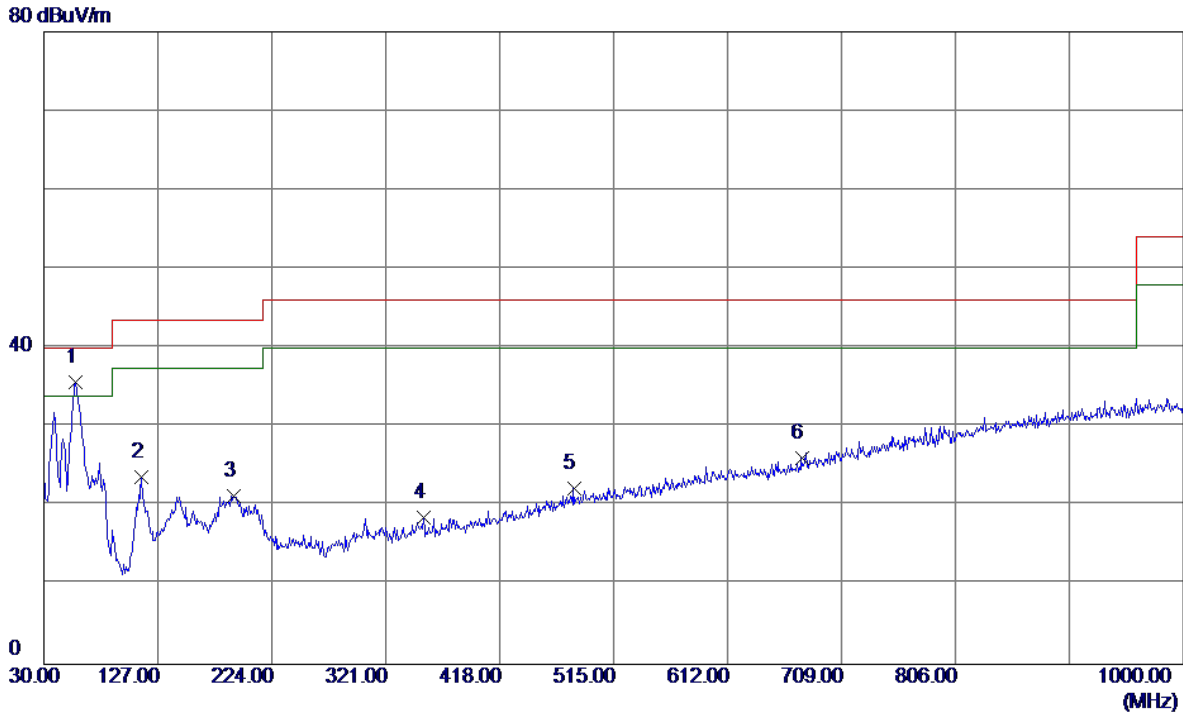

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	49.49	-13.77	35.72	40.00	-4.28	Peak	
2	113.4200	39.26	-15.59	23.67	43.50	-19.83	Peak	
3	191.9900	33.88	-12.62	21.26	43.50	-22.24	Peak	
4	353.0100	29.80	-11.30	18.50	46.00	-27.50	Peak	
5	481.0500	30.67	-8.42	22.25	46.00	-23.75	Peak	
6	675.0500	29.75	-3.71	26.04	46.00	-19.96	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: BYD)

Horizontal

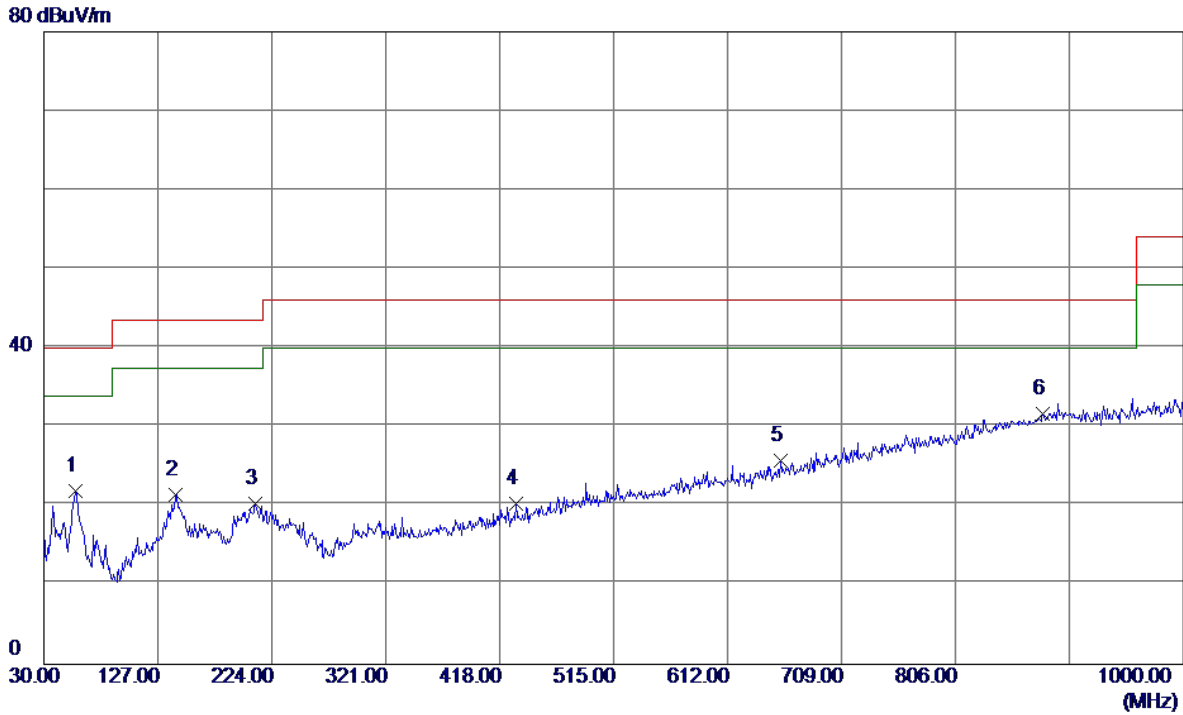


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	57.1600	35.70	-13.77	21.93	40.00	-18.07	Peak	
2	142.5200	35.12	-13.68	21.44	43.50	-22.06	Peak	
3	210.4200	33.85	-13.55	20.30	43.50	-23.20	Peak	
4	431.5800	30.13	-9.76	20.37	46.00	-25.63	Peak	
5	657.5900	30.04	-4.26	25.78	46.00	-20.22	Peak	
6 *	880.6900	29.96	1.79	31.75	46.00	-14.25	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

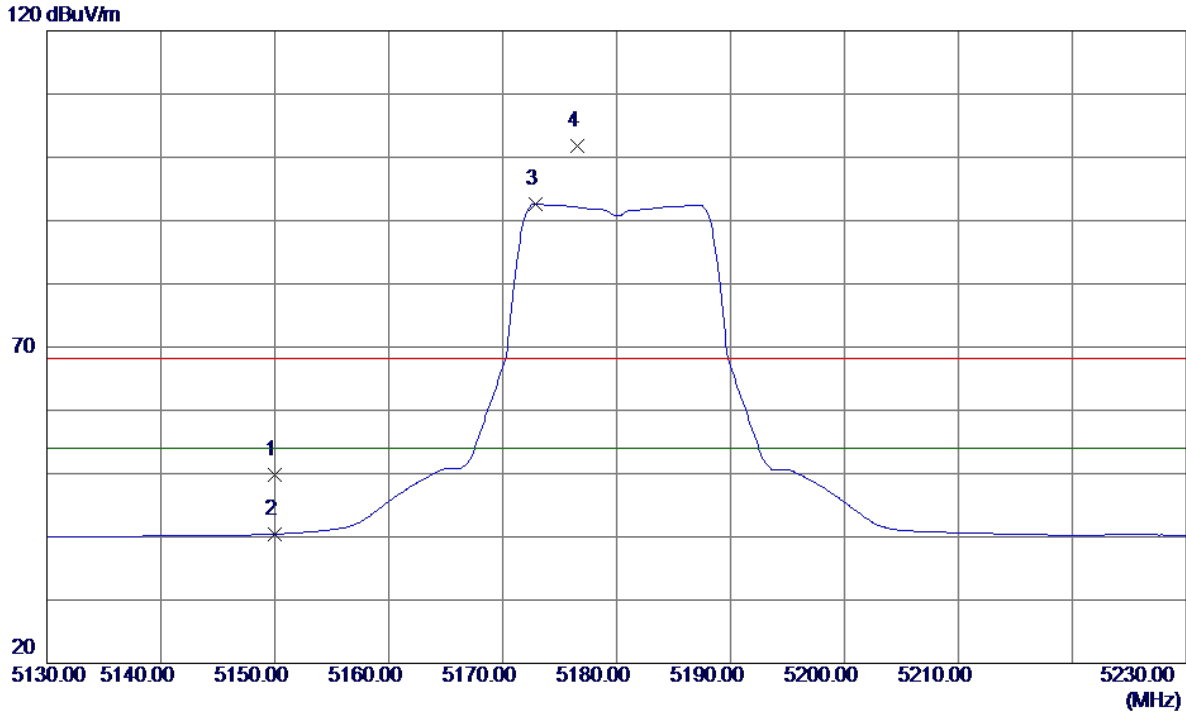


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.47	40.32	49.79	68.30	-18.51	Peak	
2	5150.0000	0.10	40.32	40.42	54.00	-13.58	AVG	
3 *	5172.9000	52.16	40.45	92.61	54.00	38.61	AVG	No Limit
4	5176.6000	61.31	40.47	101.78	68.30	33.48	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

115 dBuV/m

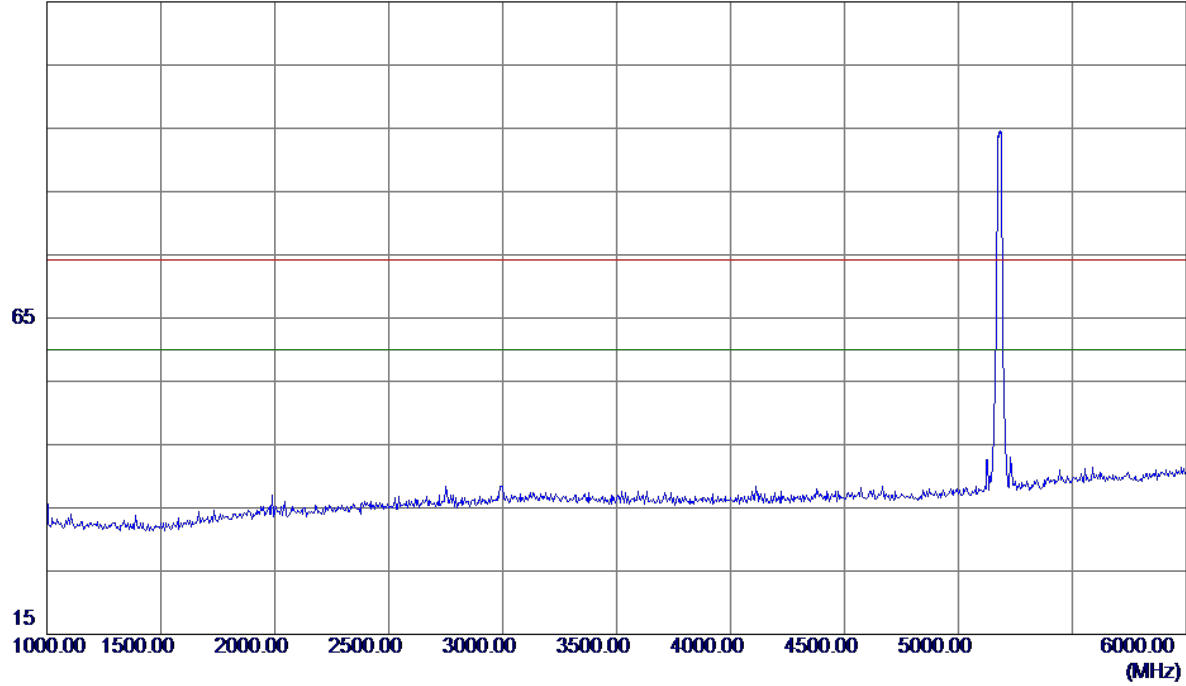


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

115 dBuV/m

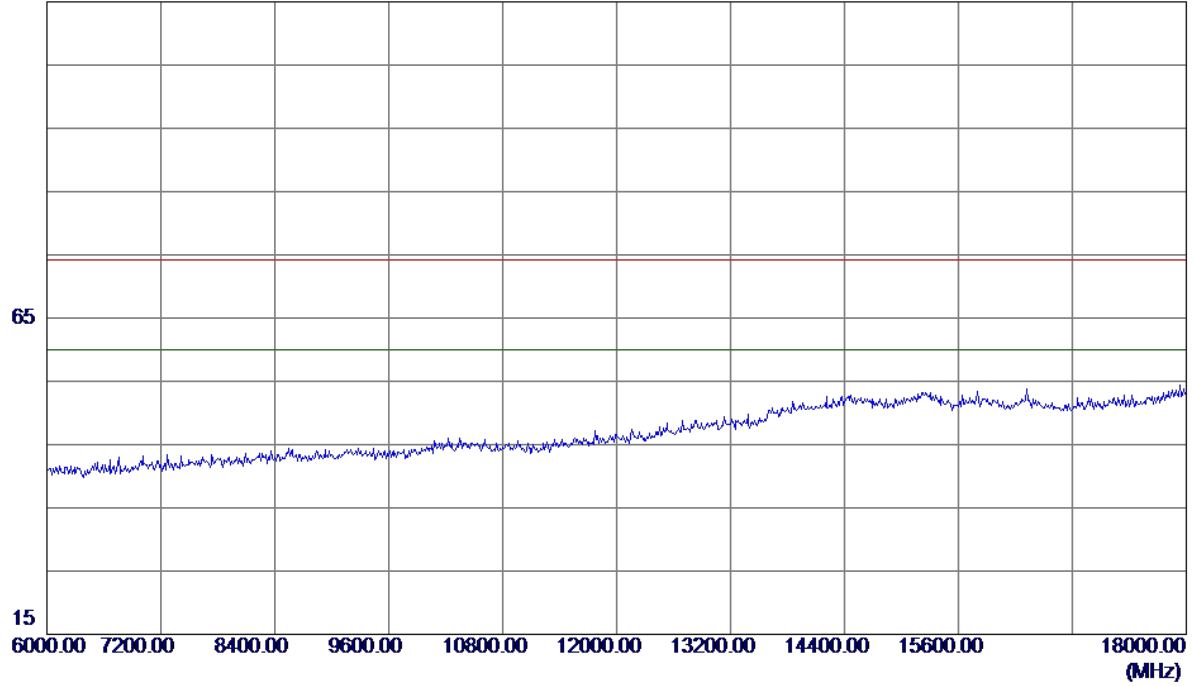


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical


115 dBuV/m

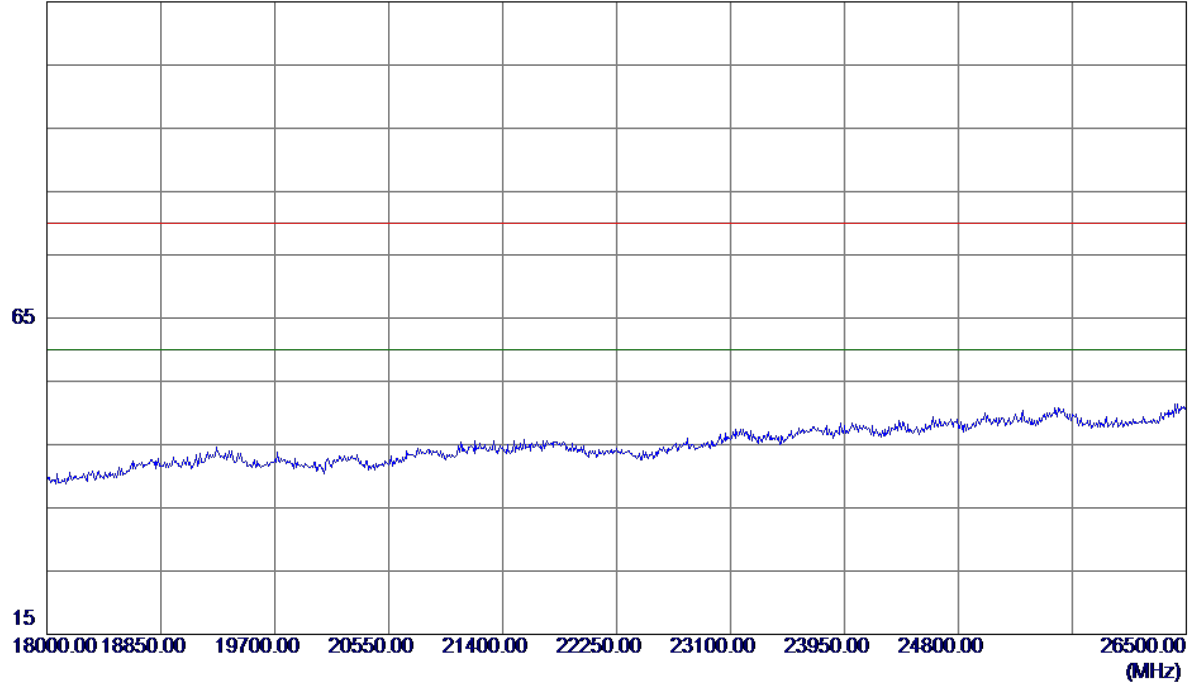

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

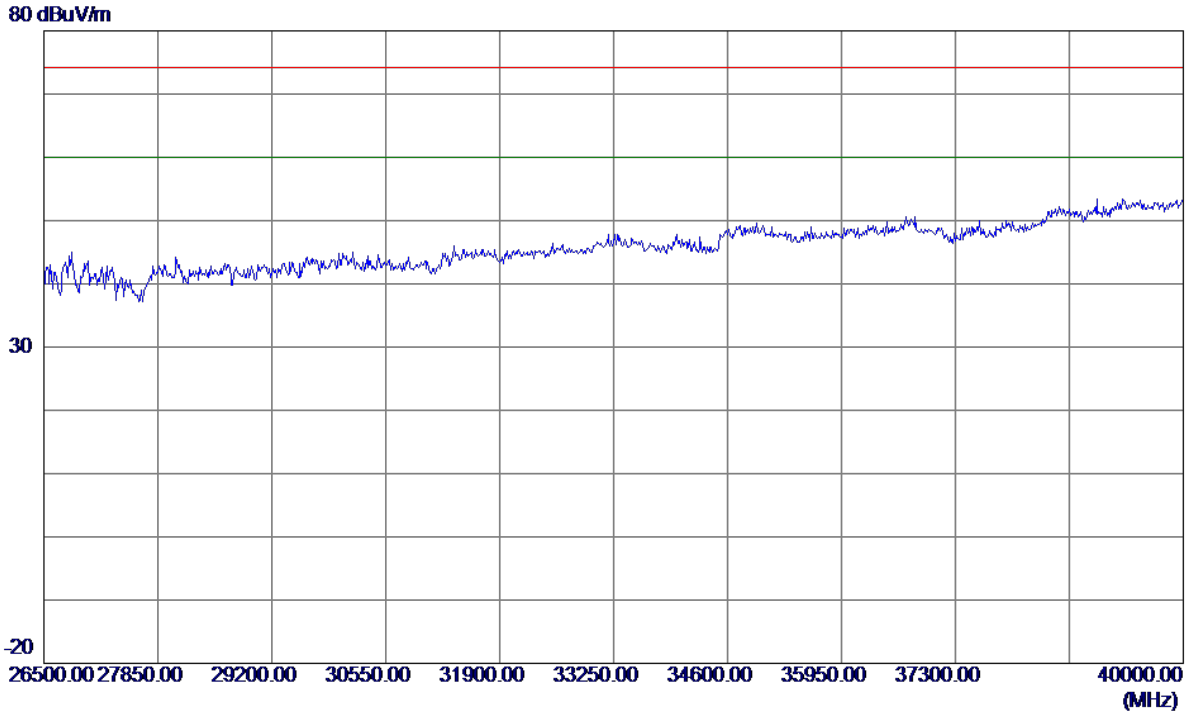


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

120 dBuV/m

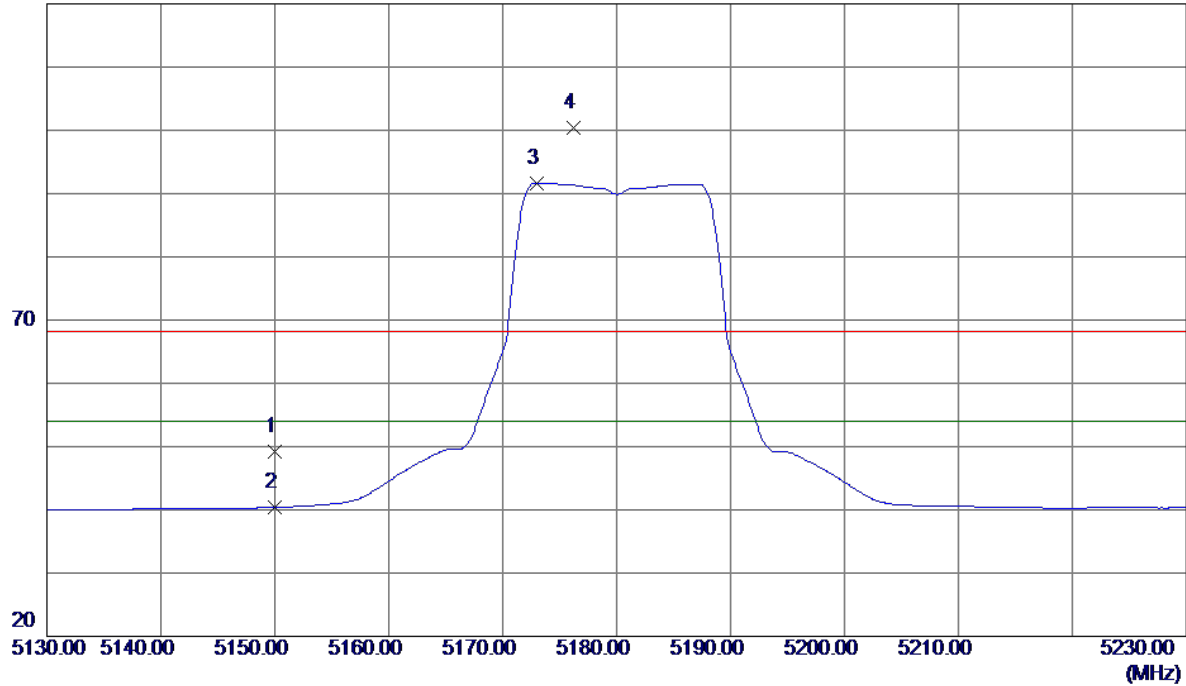


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.80	40.32	49.12	68.30	-19.18	Peak	
2	5150.0000	0.08	40.32	40.40	54.00	-13.60	AVG	
3 *	5173.0000	51.22	40.45	91.67	54.00	37.67	AVG	No Limit
4	5176.2000	59.99	40.46	100.45	68.30	32.15	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

115 dBuV/m

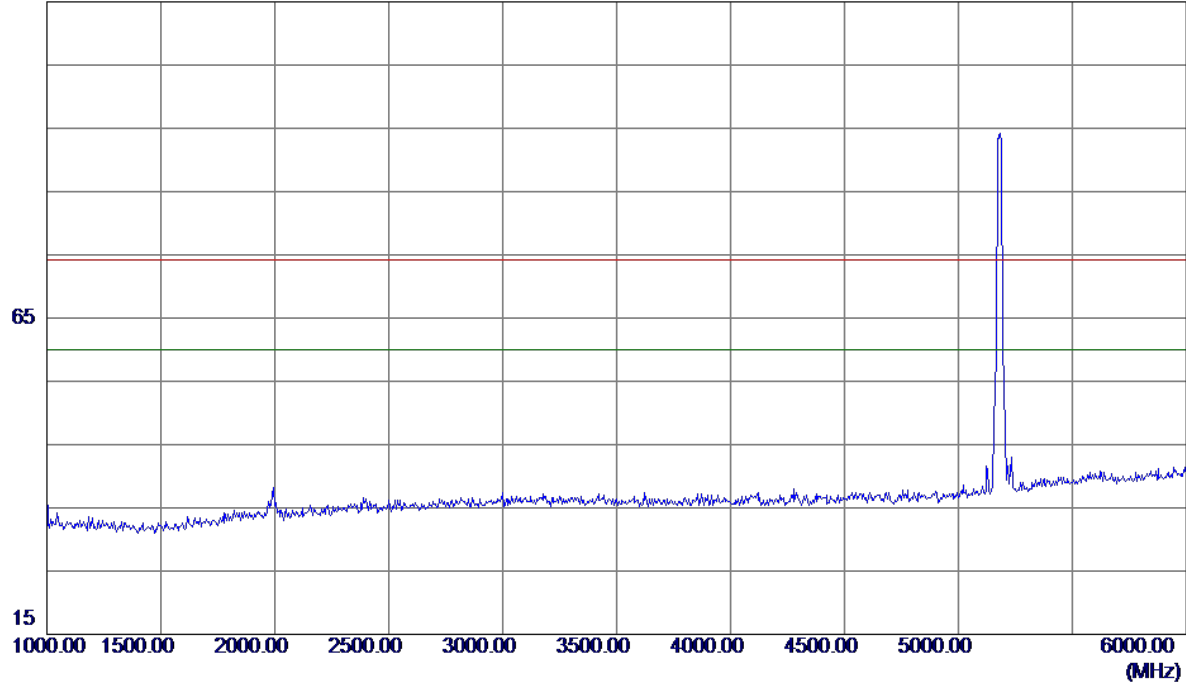


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

115 dBuV/m

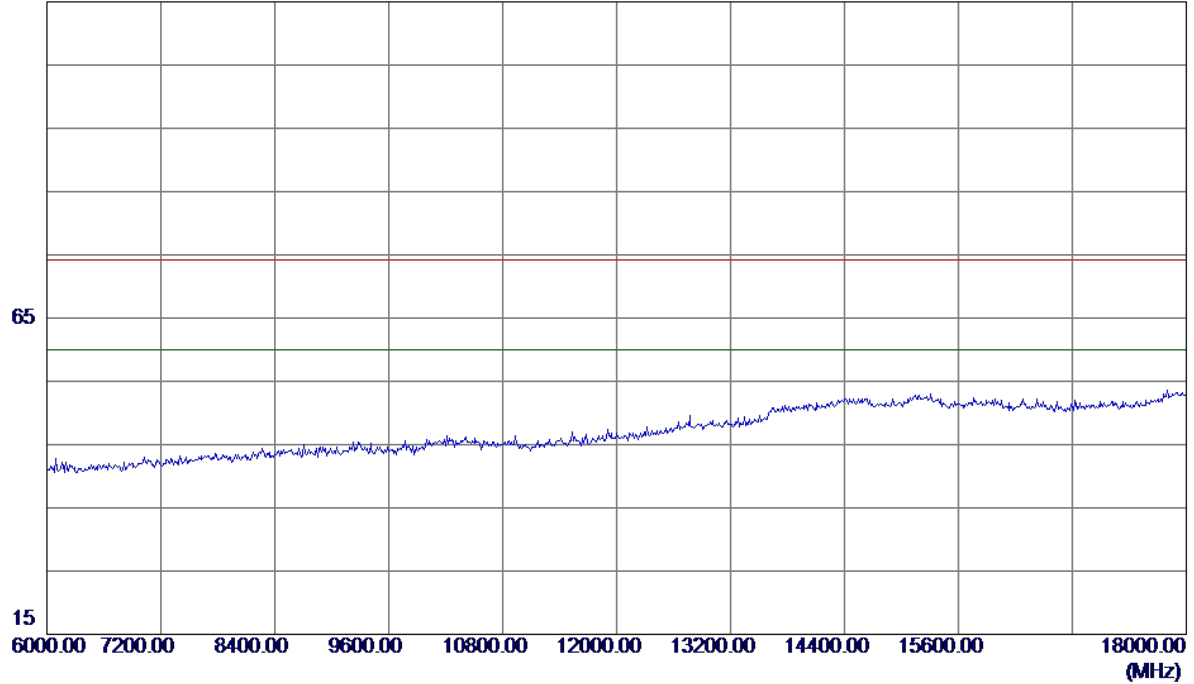


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal


115 dBuV/m

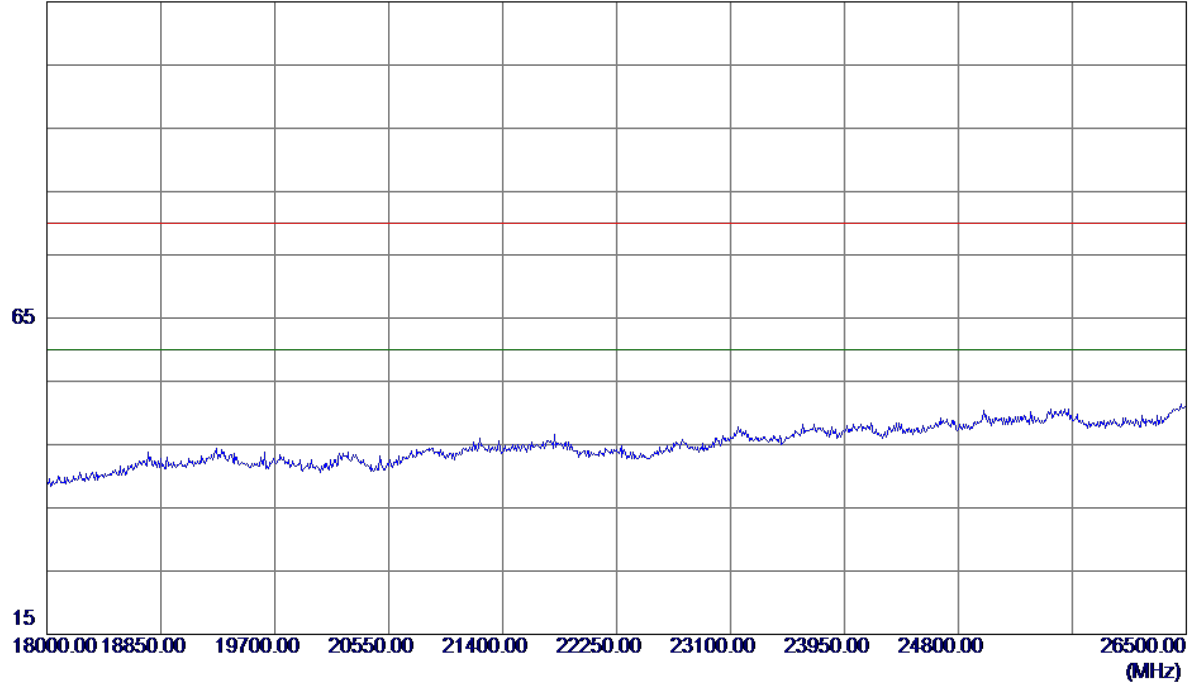

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

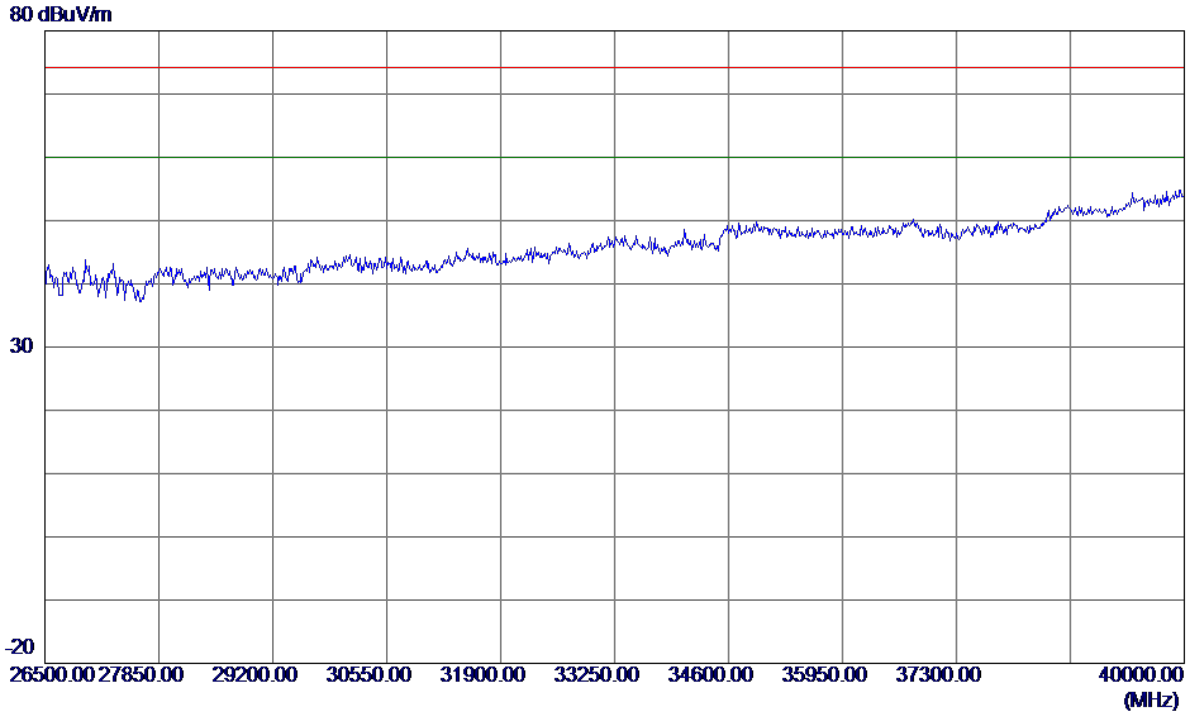


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical


120 dBuV/m

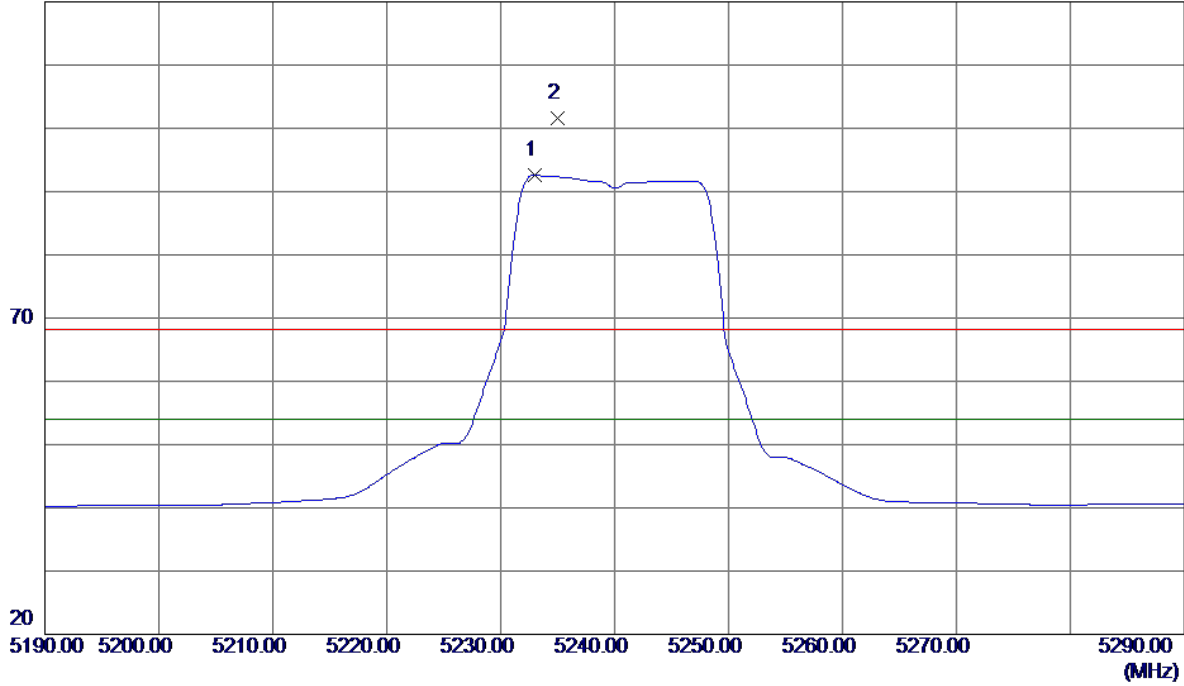

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5233.0000	51.80	40.76	92.56	54.00	38.56	AVG	No Limit
2	5235.0000	60.78	40.78	101.56	68.30	33.26	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

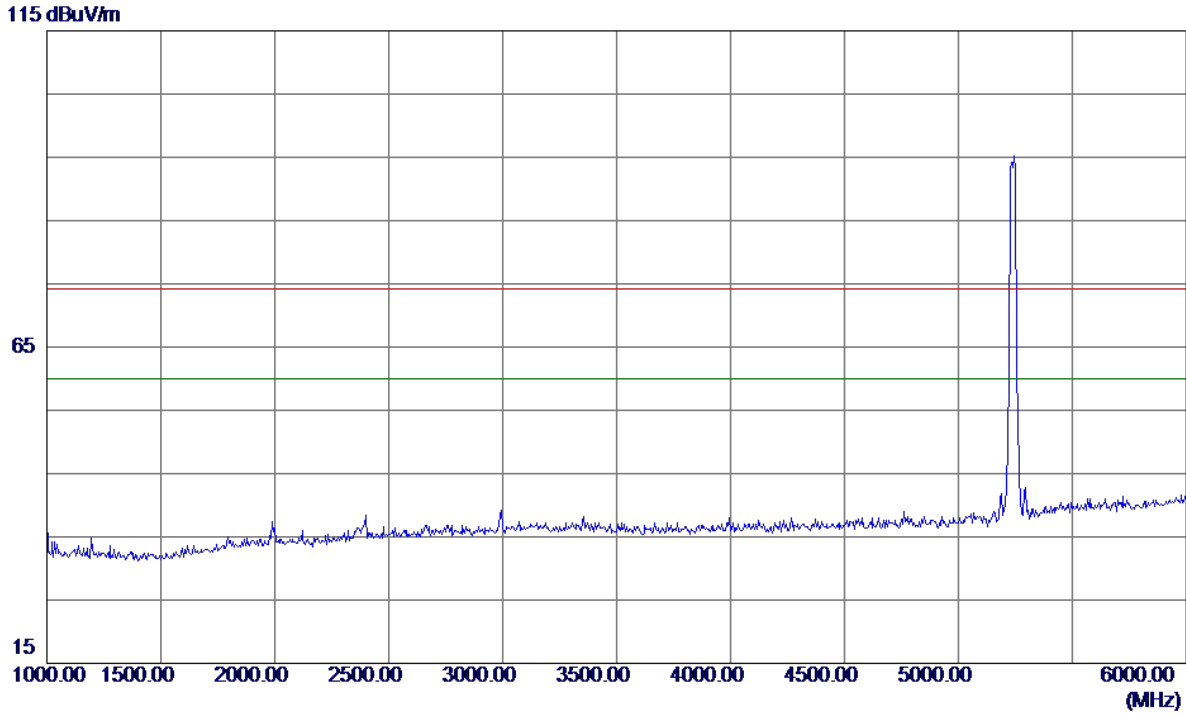


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

115 dBuV/m

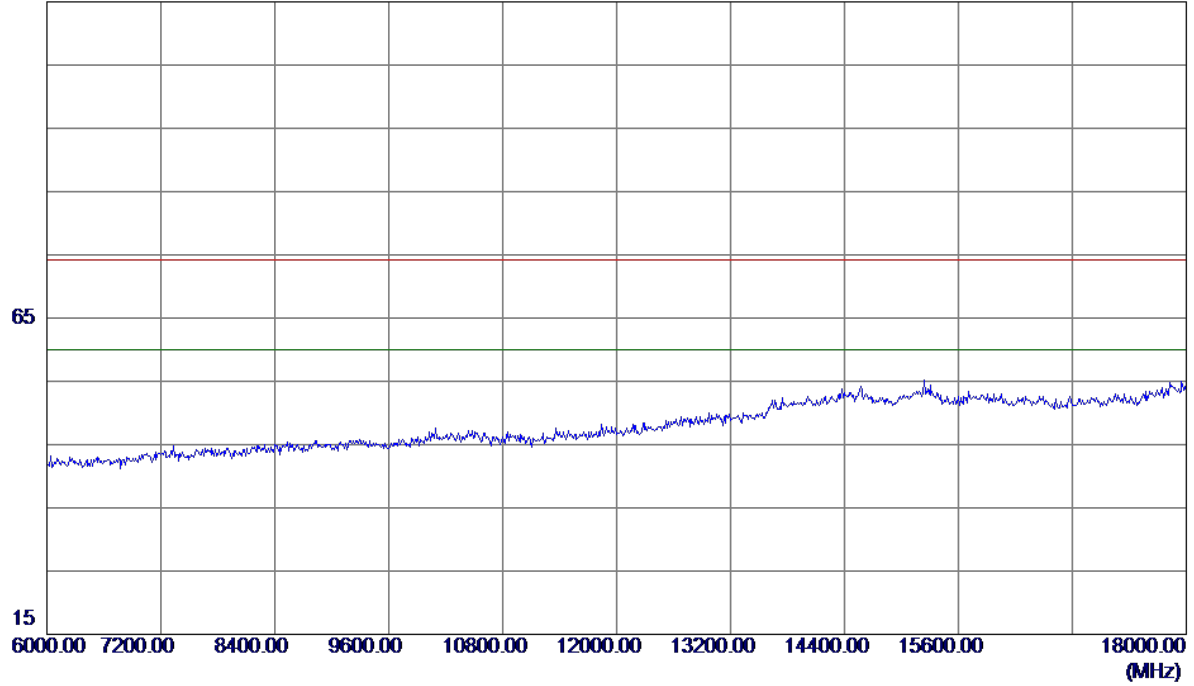


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical


115 dBuV/m

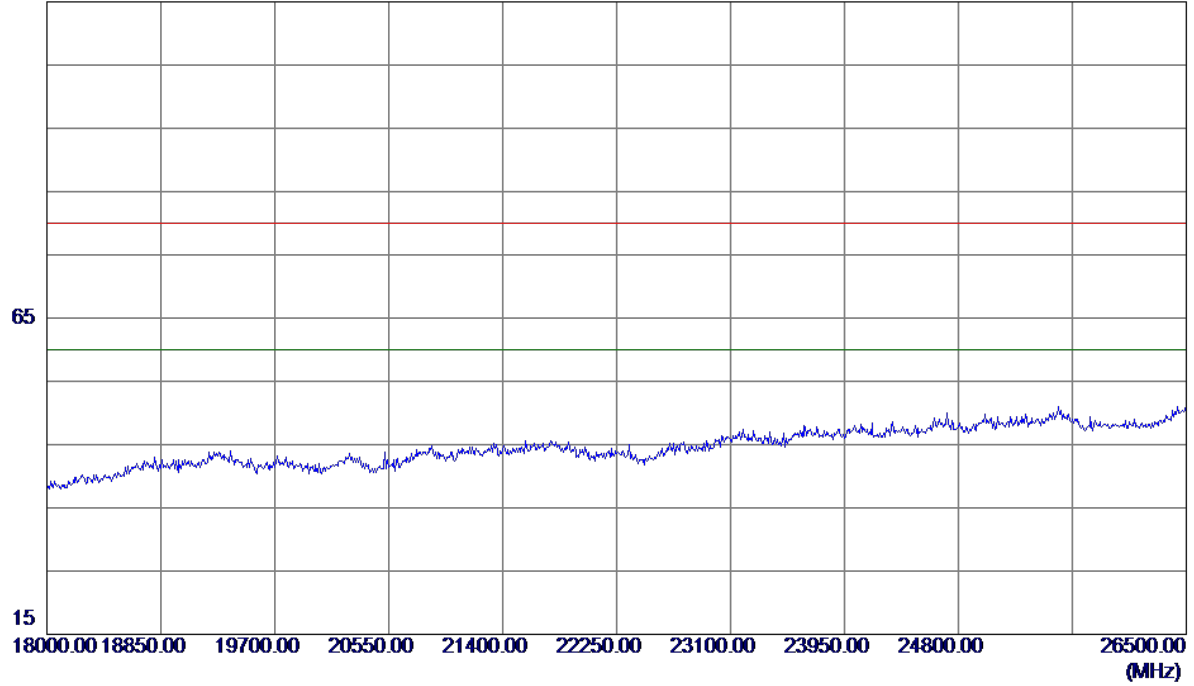

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

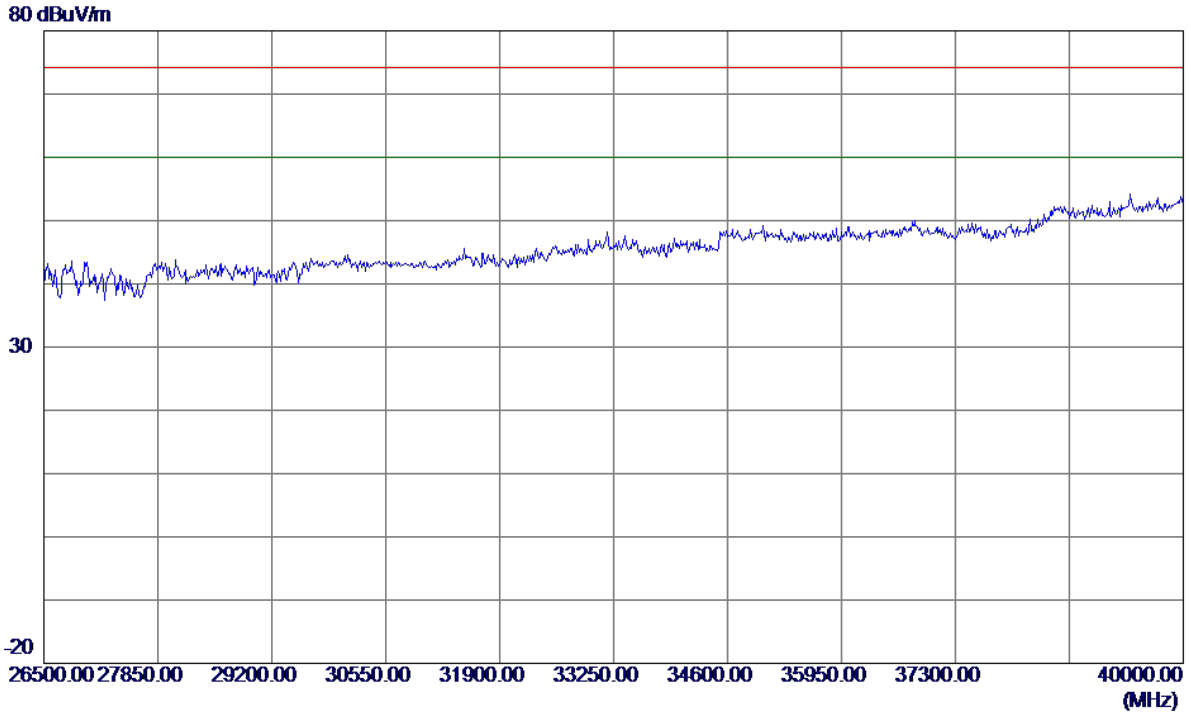

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

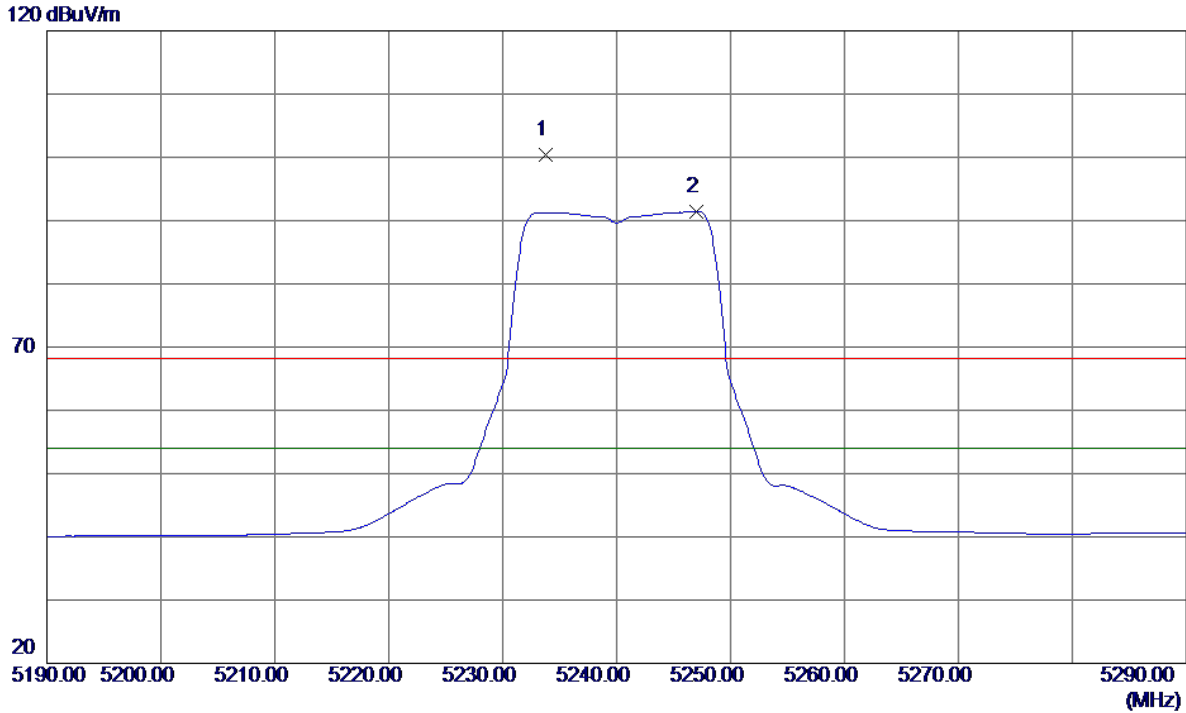


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5233.8000	59.68	40.77	100.45	68.30	32.15	Peak	No Limit
2 *	5247.0000	50.57	40.84	91.41	54.00	37.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

115 dBuV/m

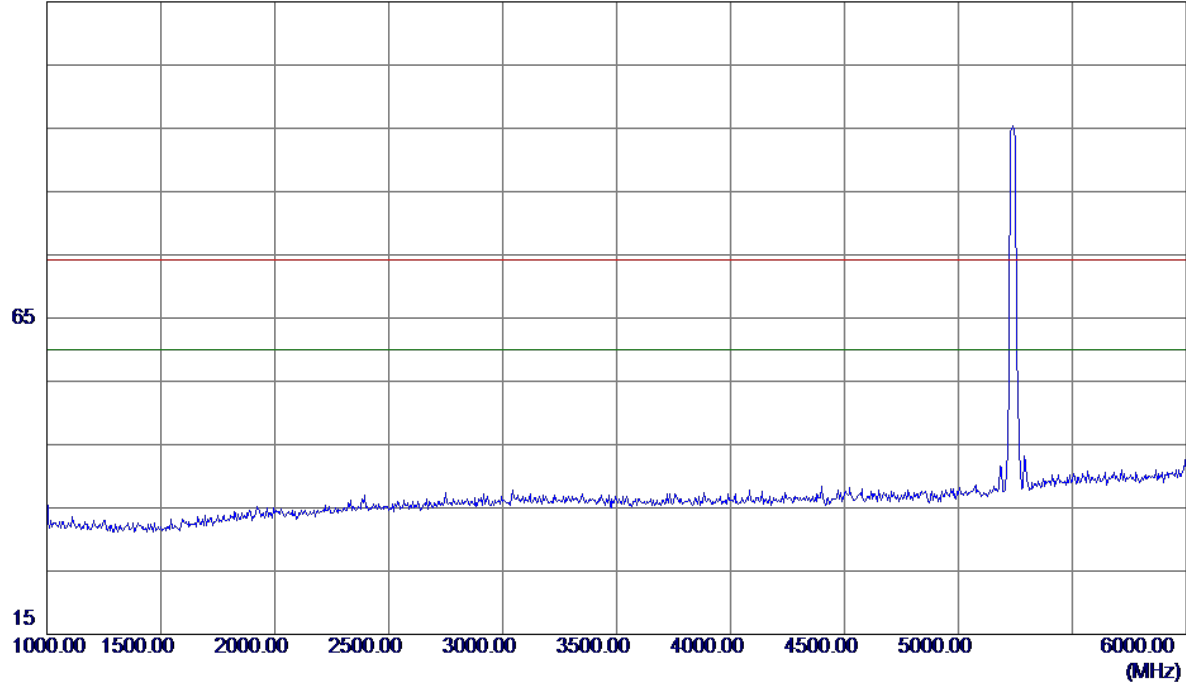


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

115 dBuV/m

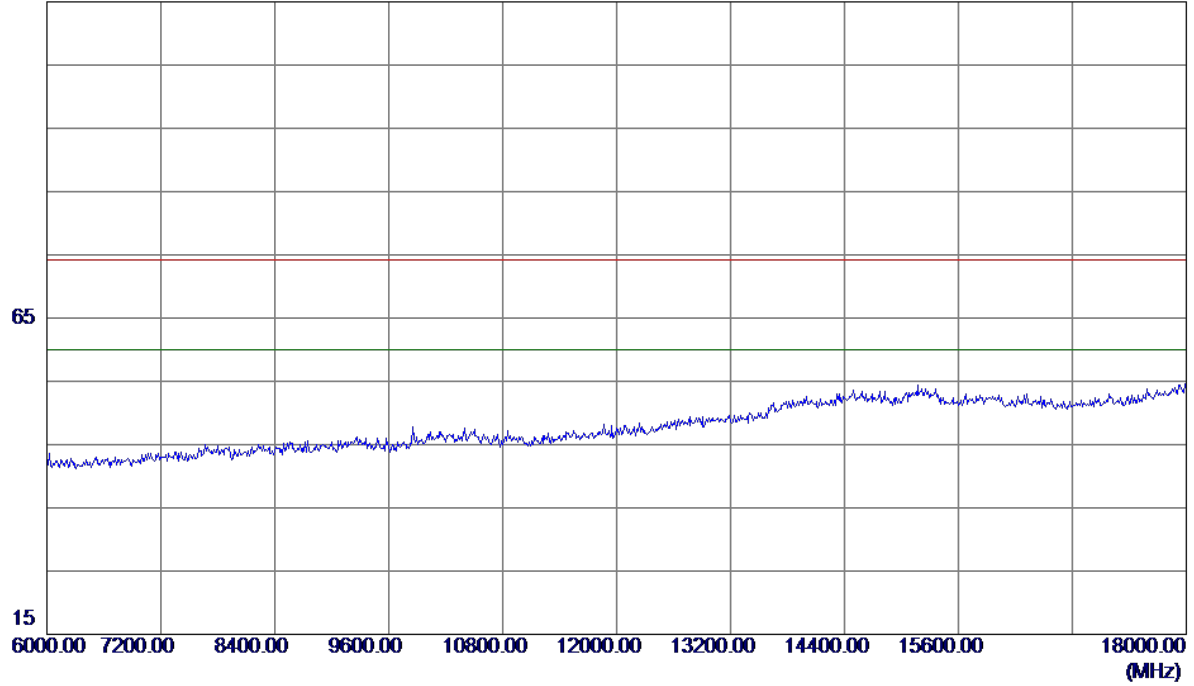


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal


115 dBuV/m

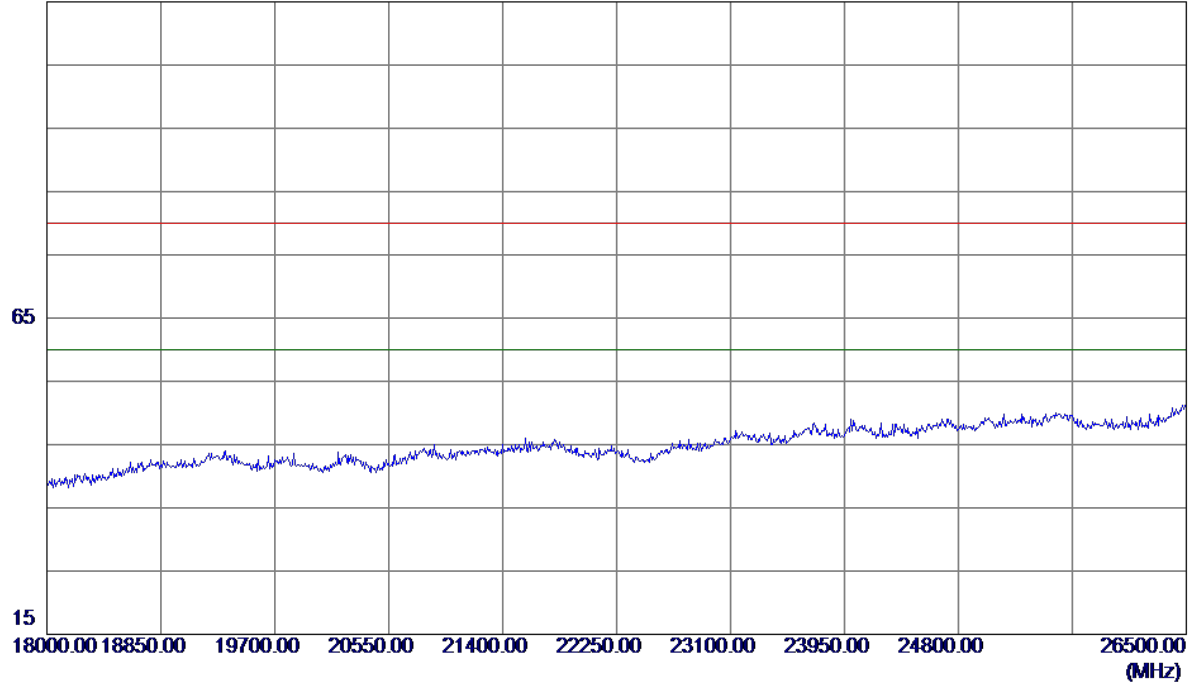

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

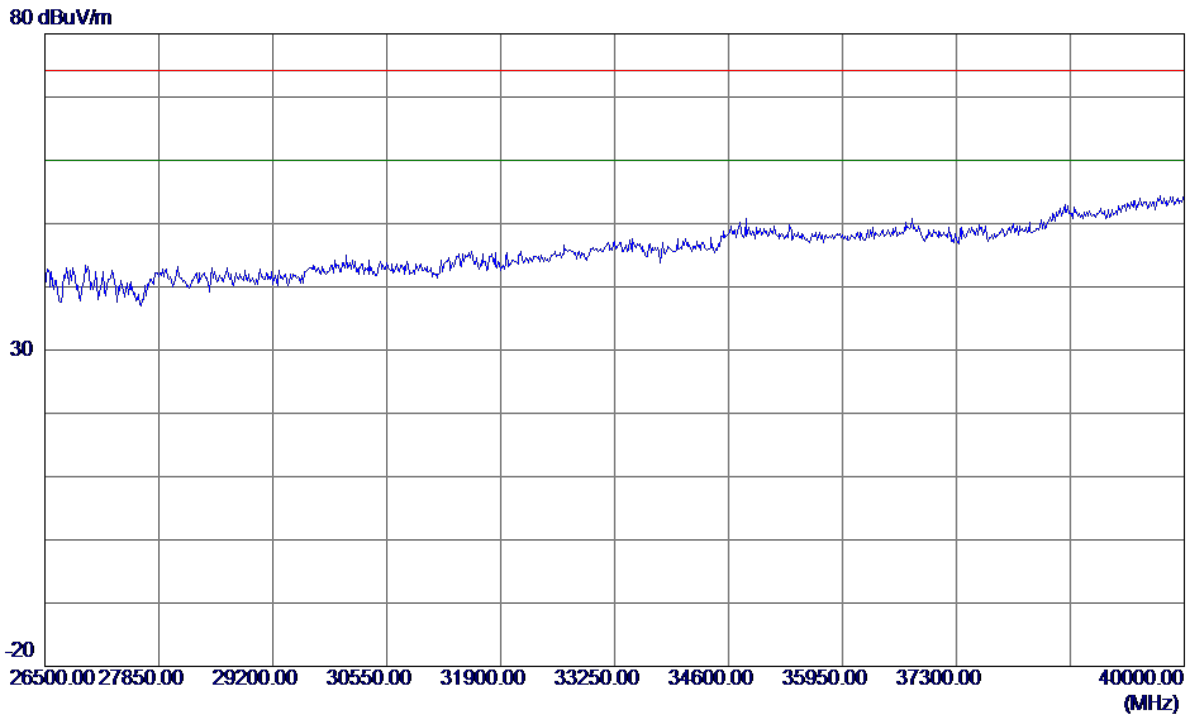


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

120 dBuV/m

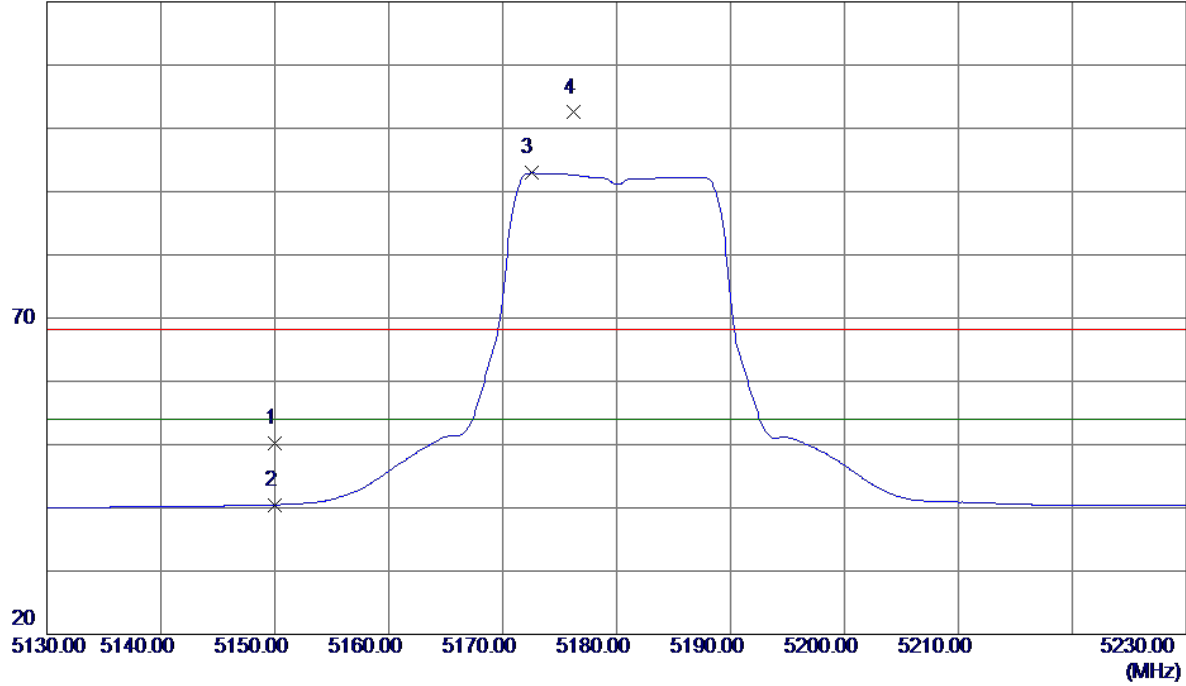


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.83	40.32	50.15	68.30	-18.15	Peak	
2	5150.0000	0.15	40.32	40.47	54.00	-13.53	AVG	
3 *	5172.5000	52.47	40.44	92.91	54.00	38.91	AVG	No Limit
4	5176.2000	62.04	40.46	102.50	68.30	34.20	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

115 dBuV/m

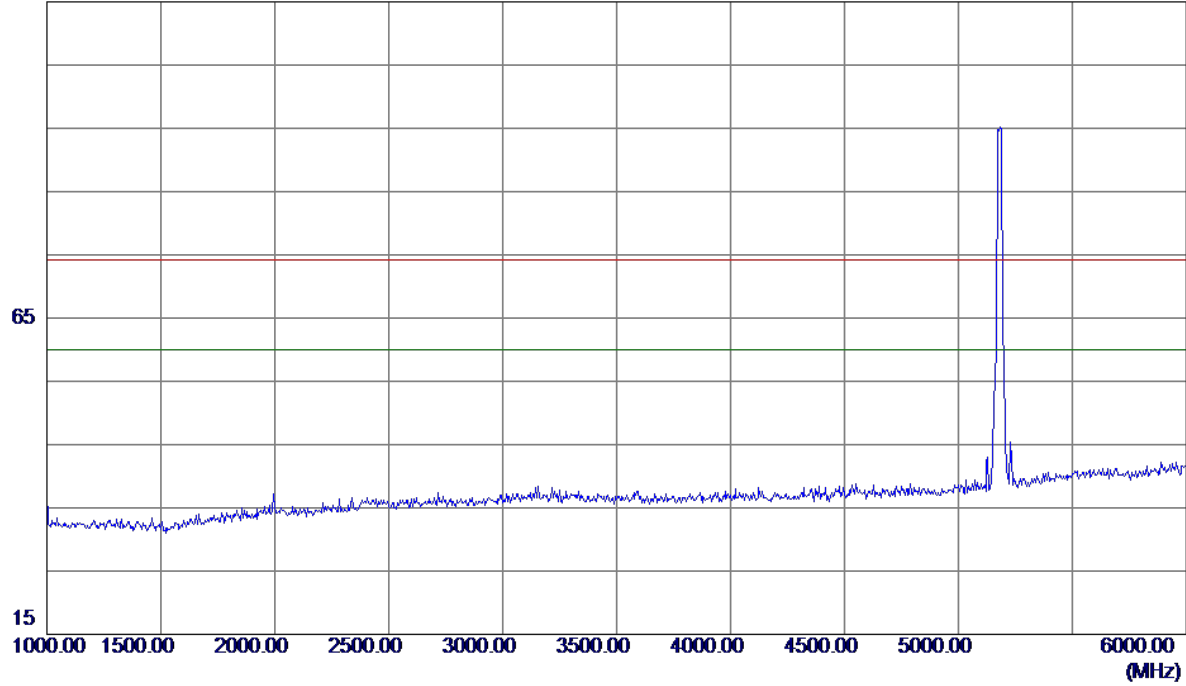


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

115 dBuV/m

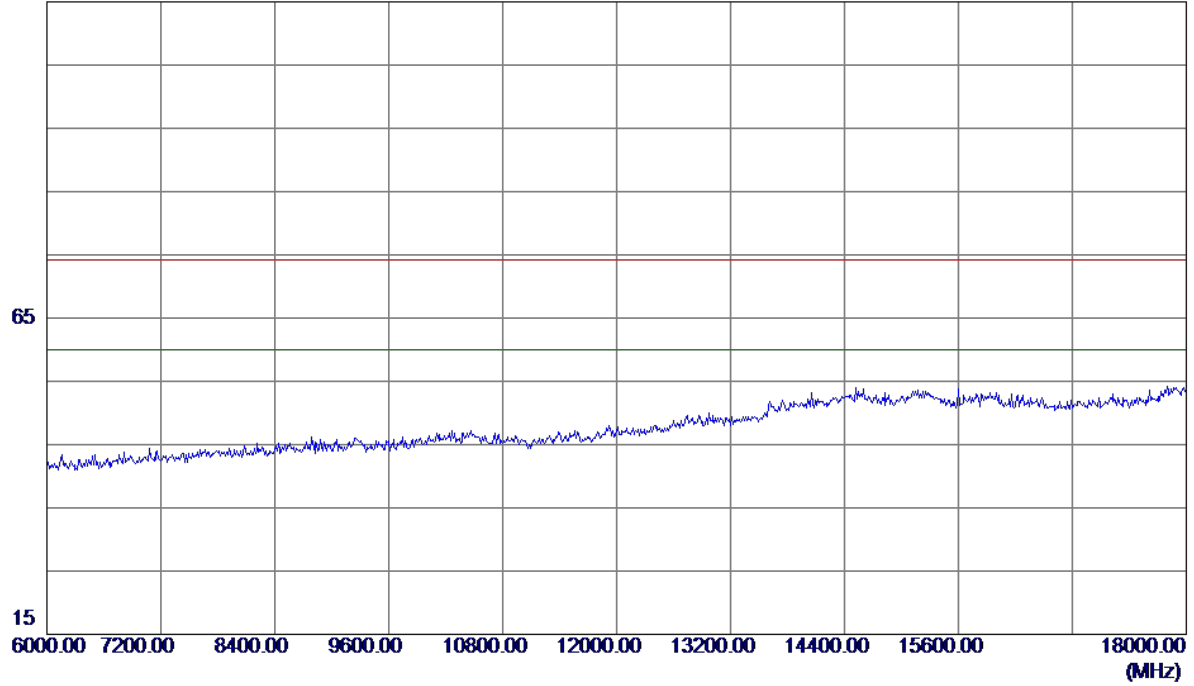


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical


115 dBuV/m

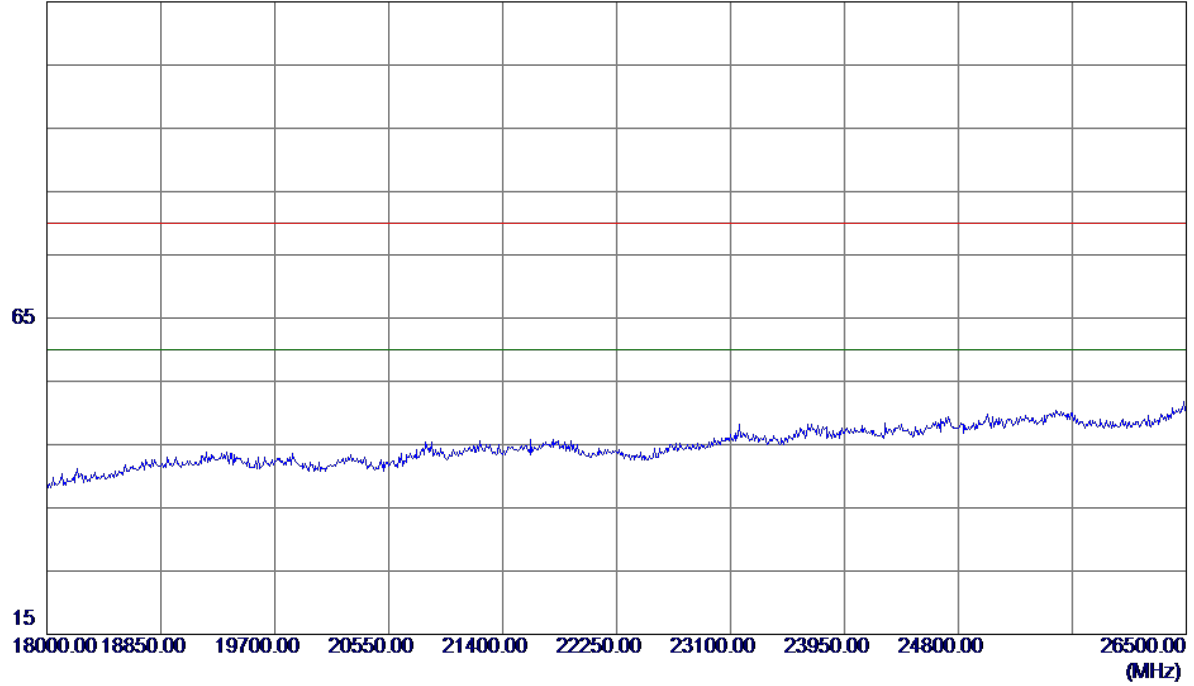

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

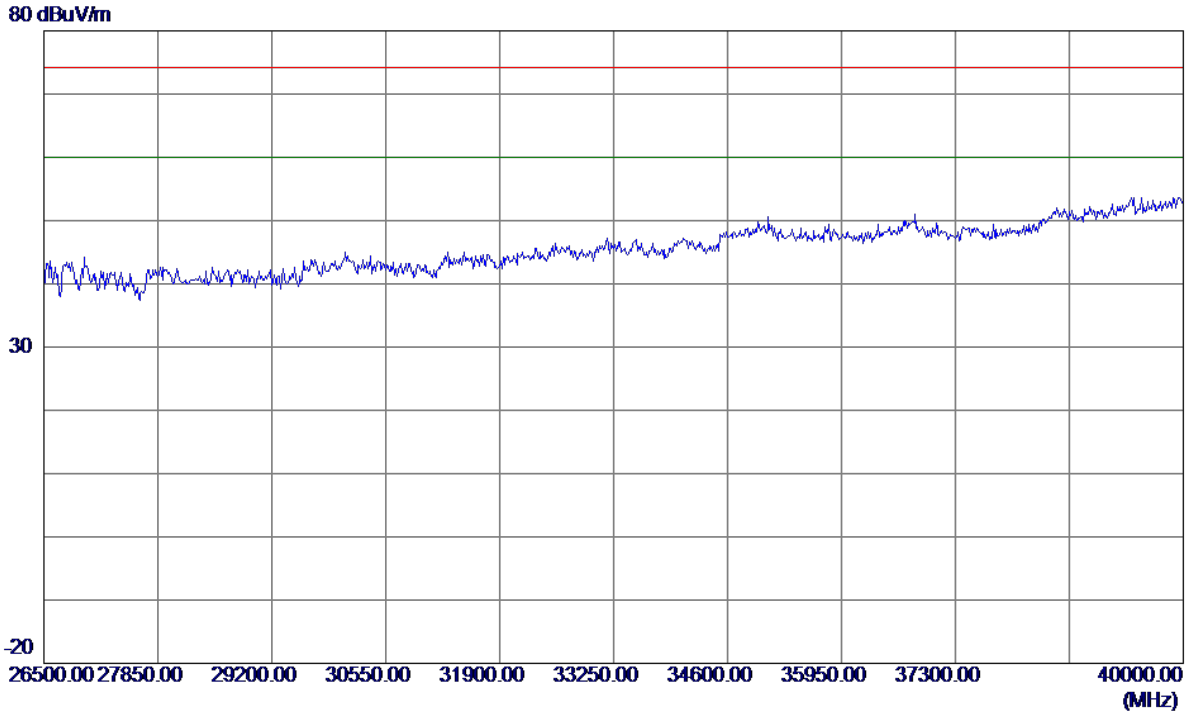


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

120 dBuV/m

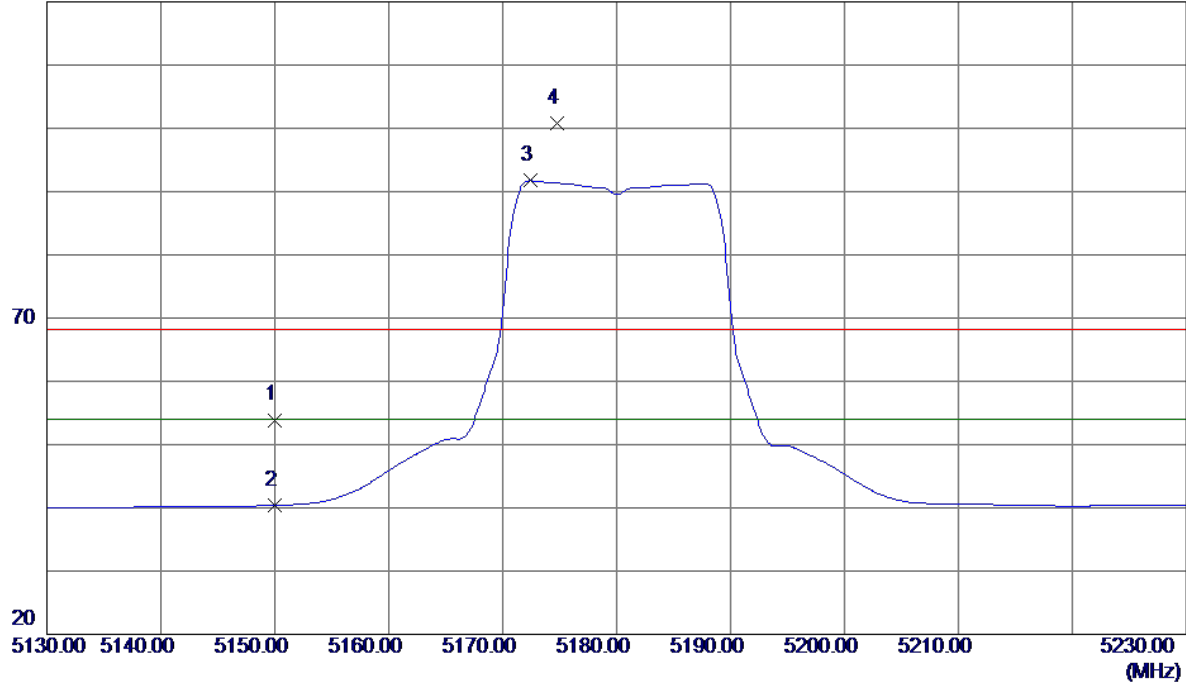


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	13.58	40.32	53.90	68.30	-14.40	Peak	
2	5150.0000	0.06	40.32	40.38	54.00	-13.62	AVG	
3 *	5172.4000	51.28	40.44	91.72	54.00	37.72	AVG	No Limit
4	5174.8000	60.26	40.46	100.72	68.30	32.42	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

115 dBuV/m

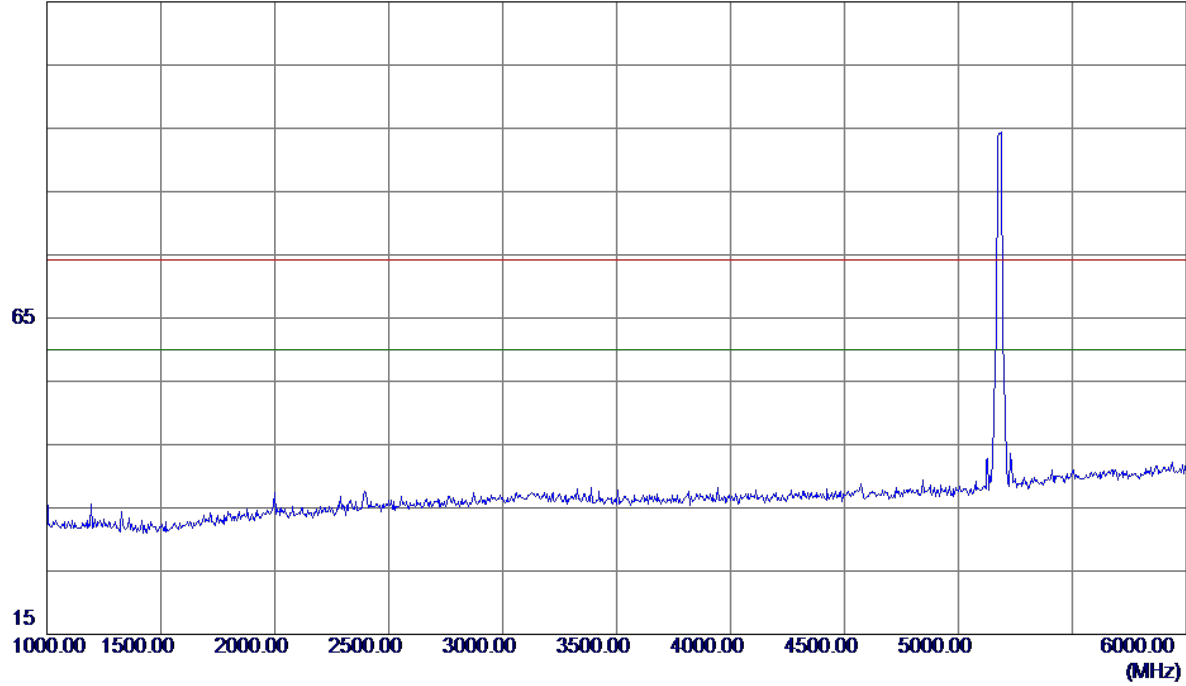


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

115 dBuV/m

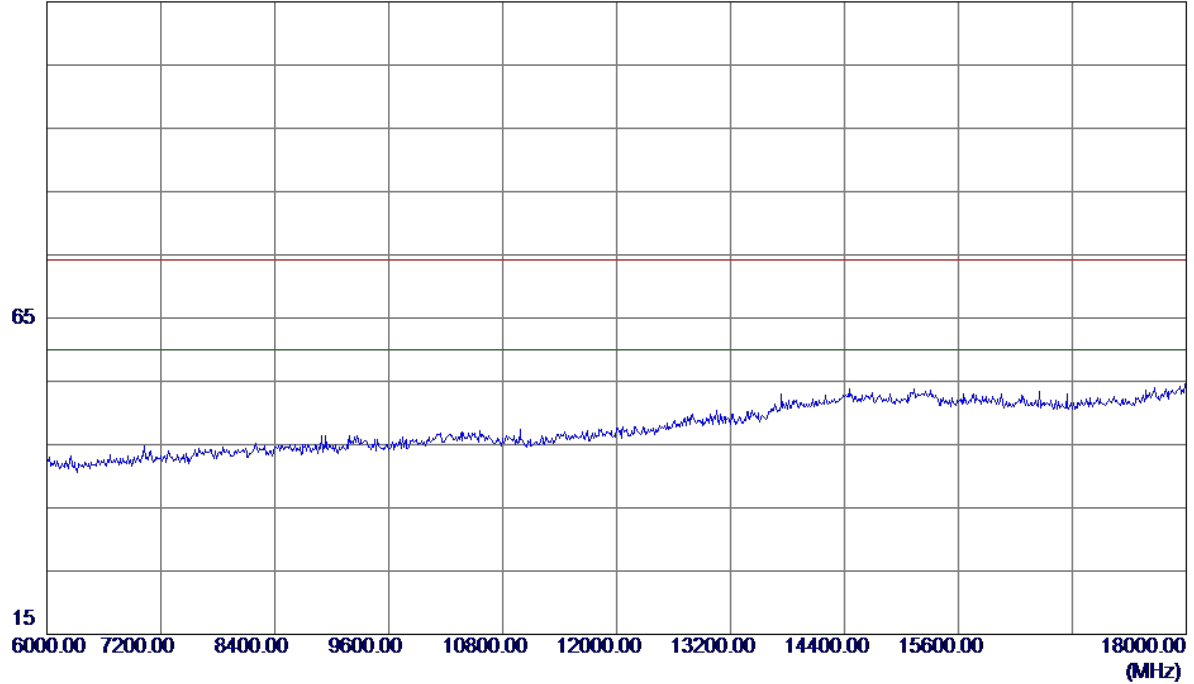


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal


115 dBuV/m

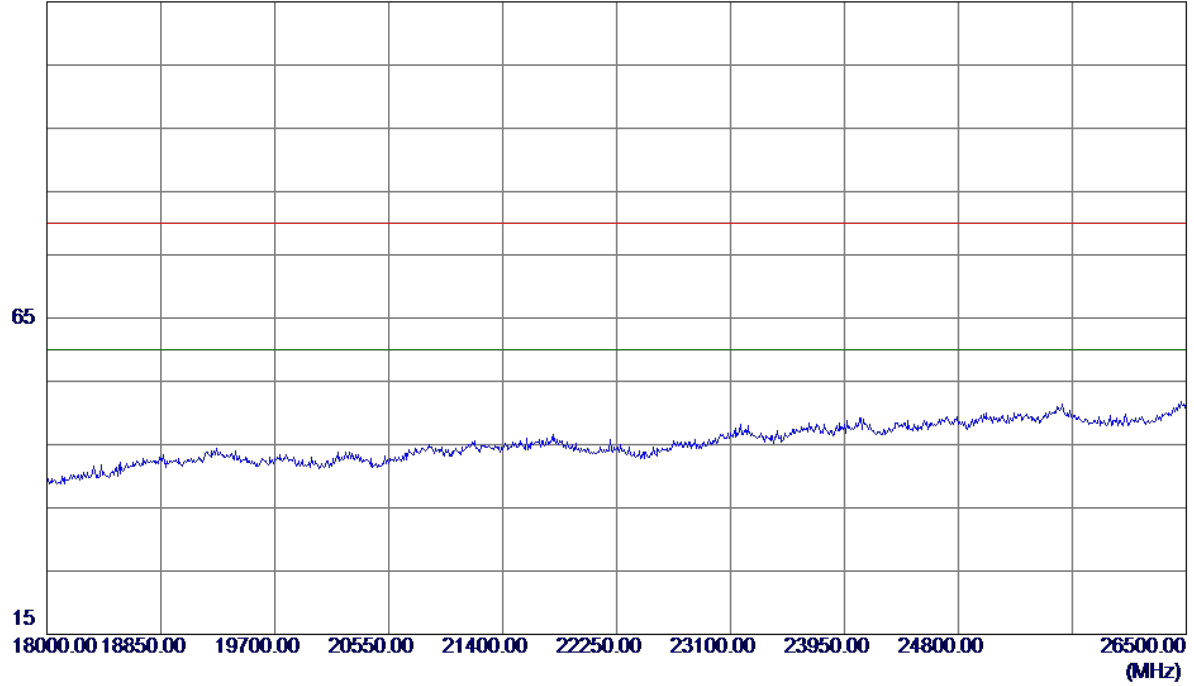

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

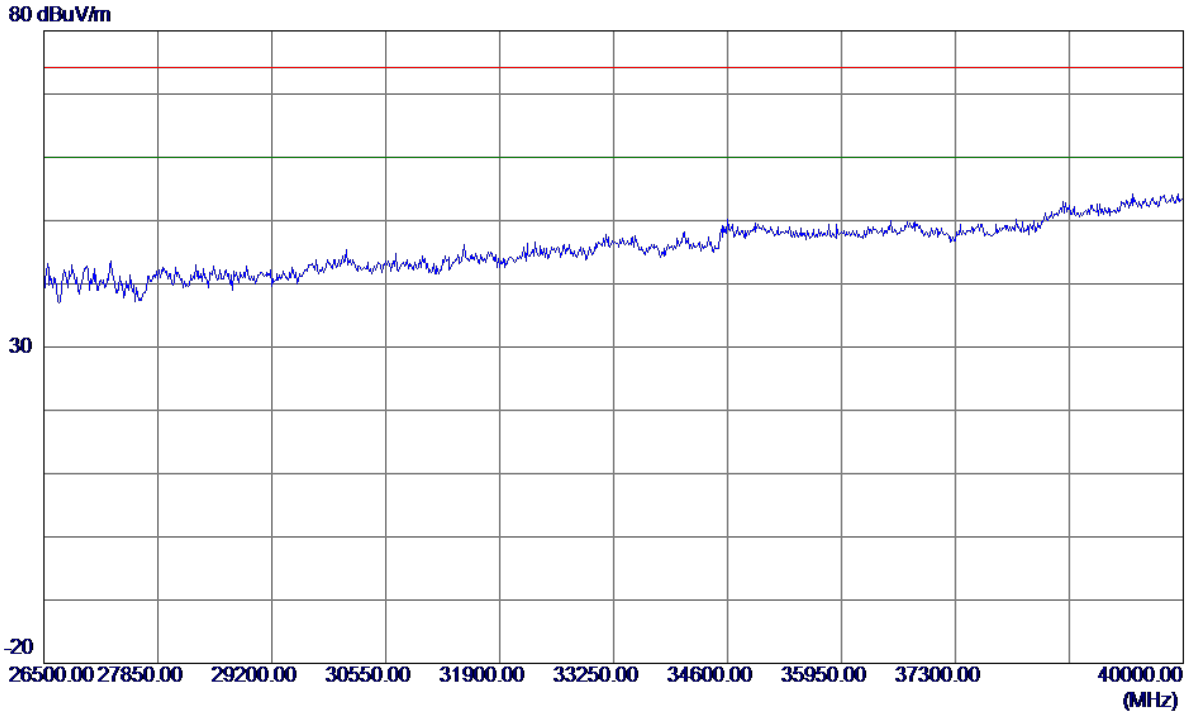


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

120 dBuV/m

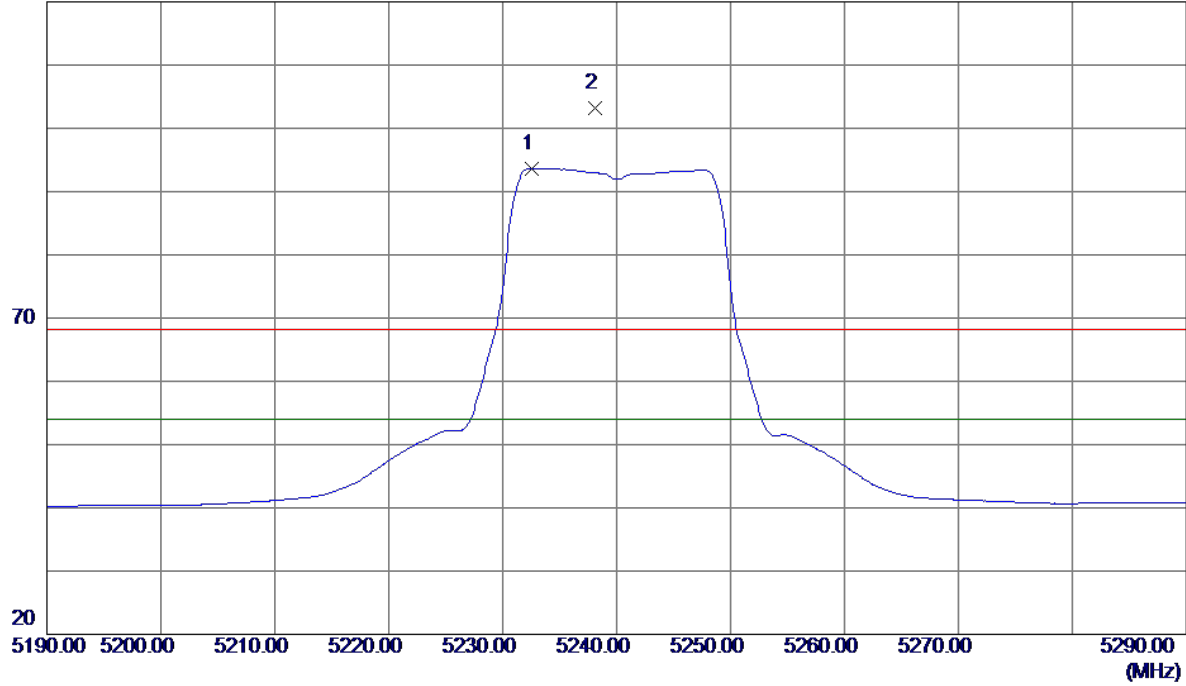


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5232.6000	52.89	40.76	93.65	54.00	39.65	AVG	No Limit
2	5238.1000	62.50	40.79	103.29	68.30	34.99	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

115 dBuV/m

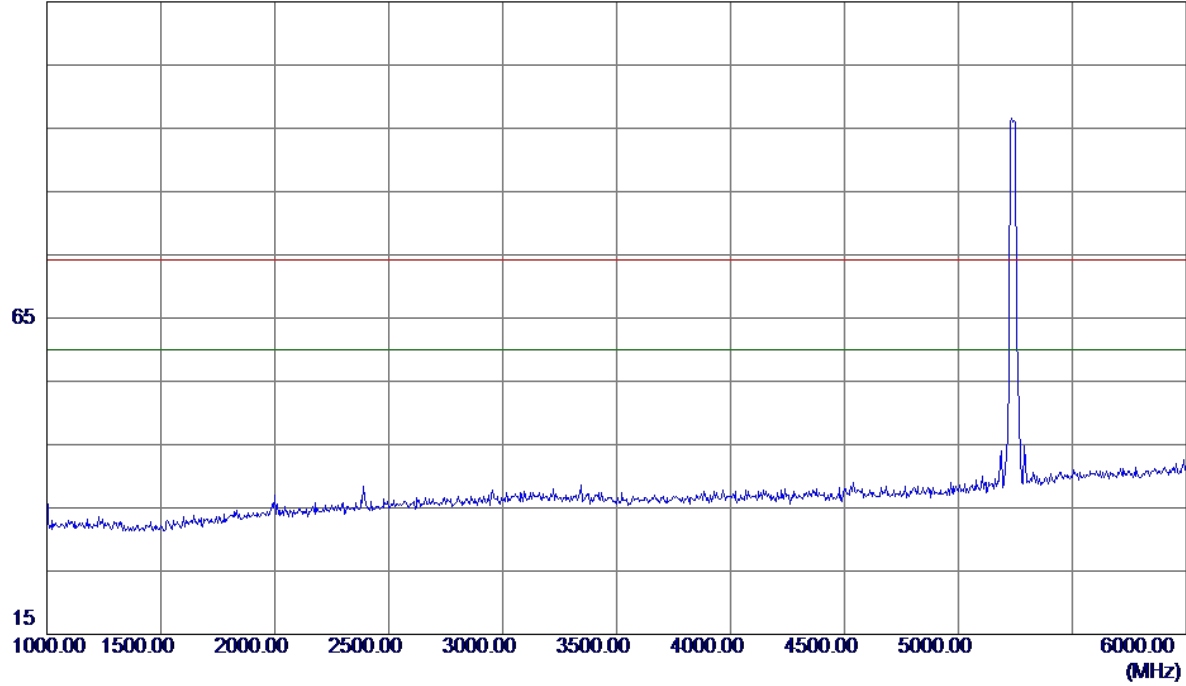


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

115 dBuV/m

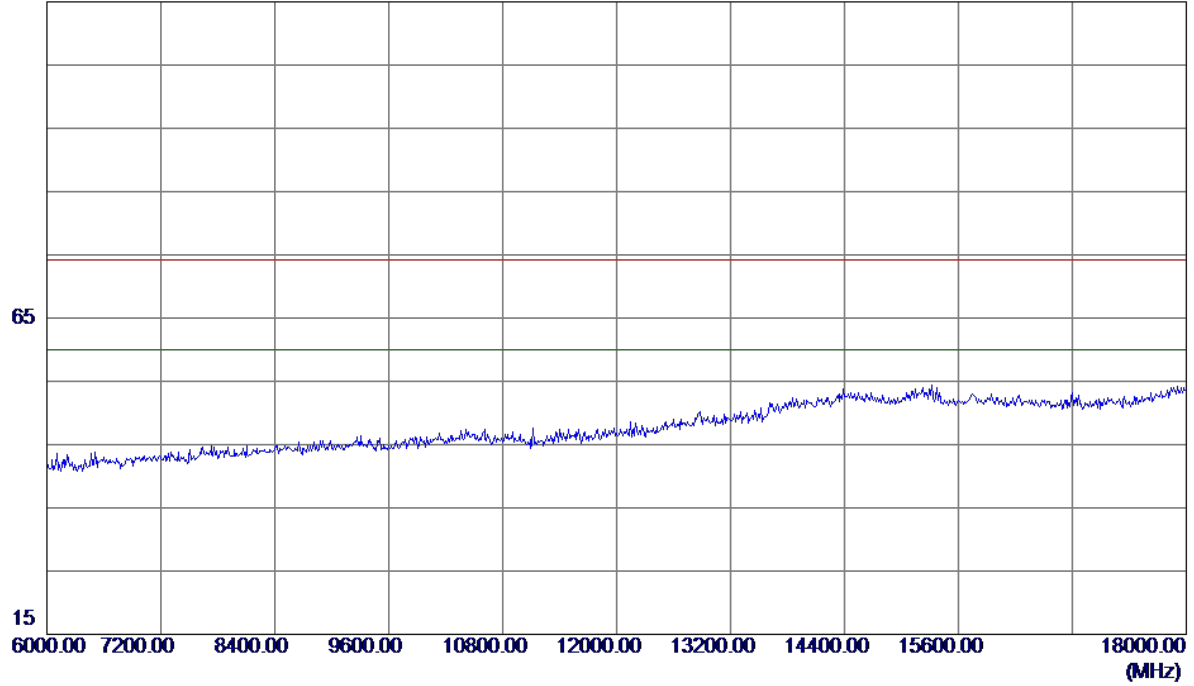


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical


115 dBuV/m

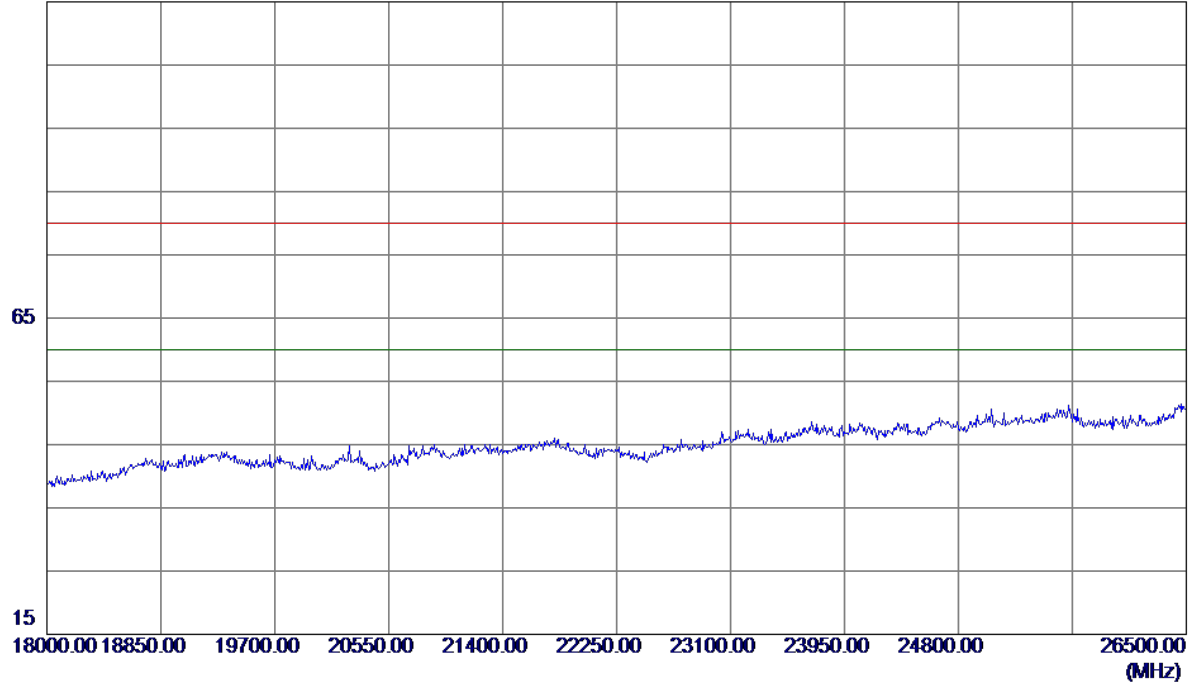

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

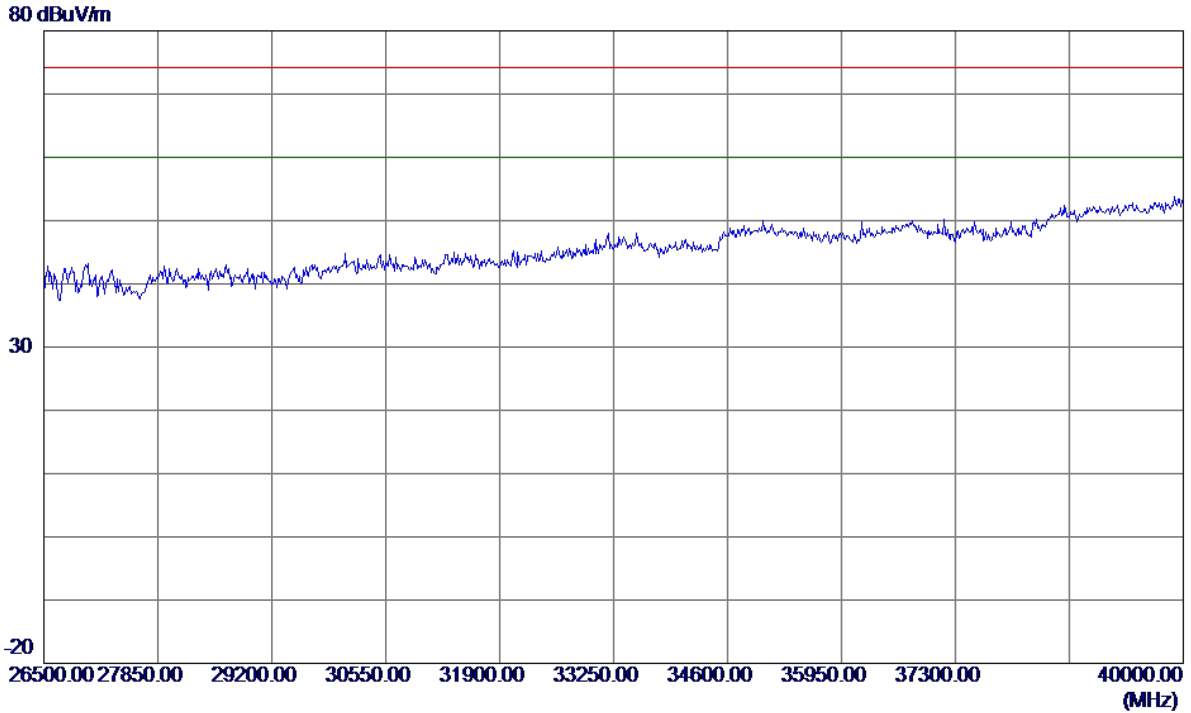


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

120 dBuV/m

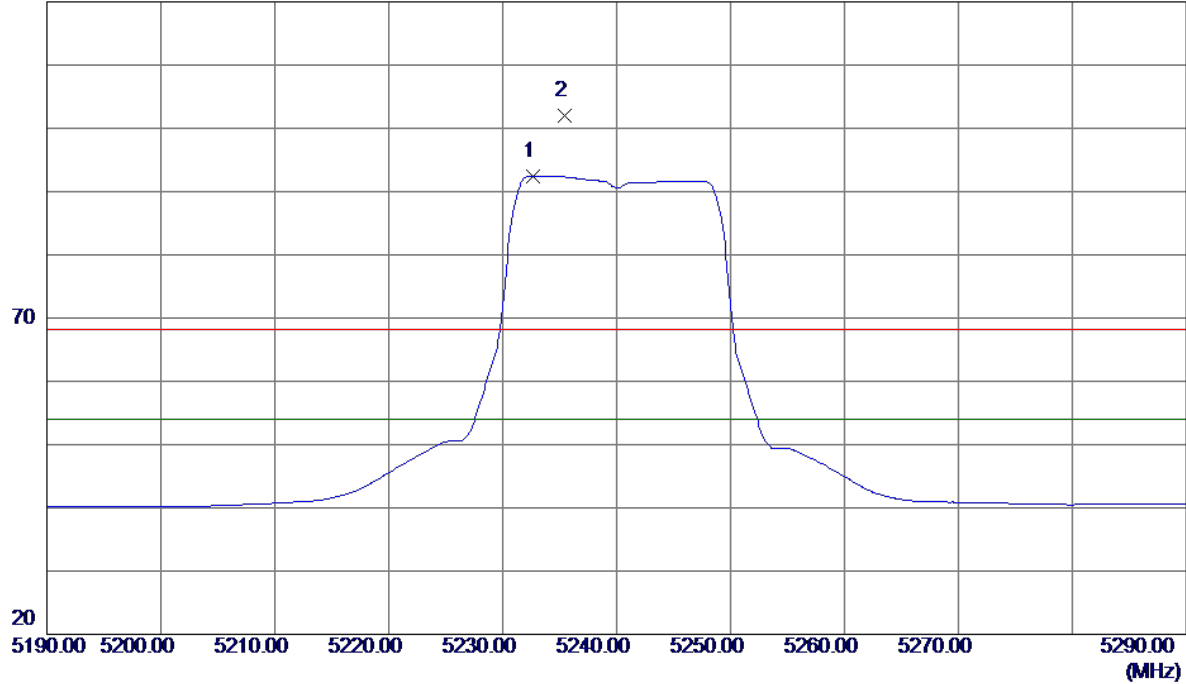


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5232.7000	51.69	40.76	92.45	54.00	38.45	AVG	No Limit
2	5235.4000	61.15	40.78	101.93	68.30	33.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

115 dBuV/m

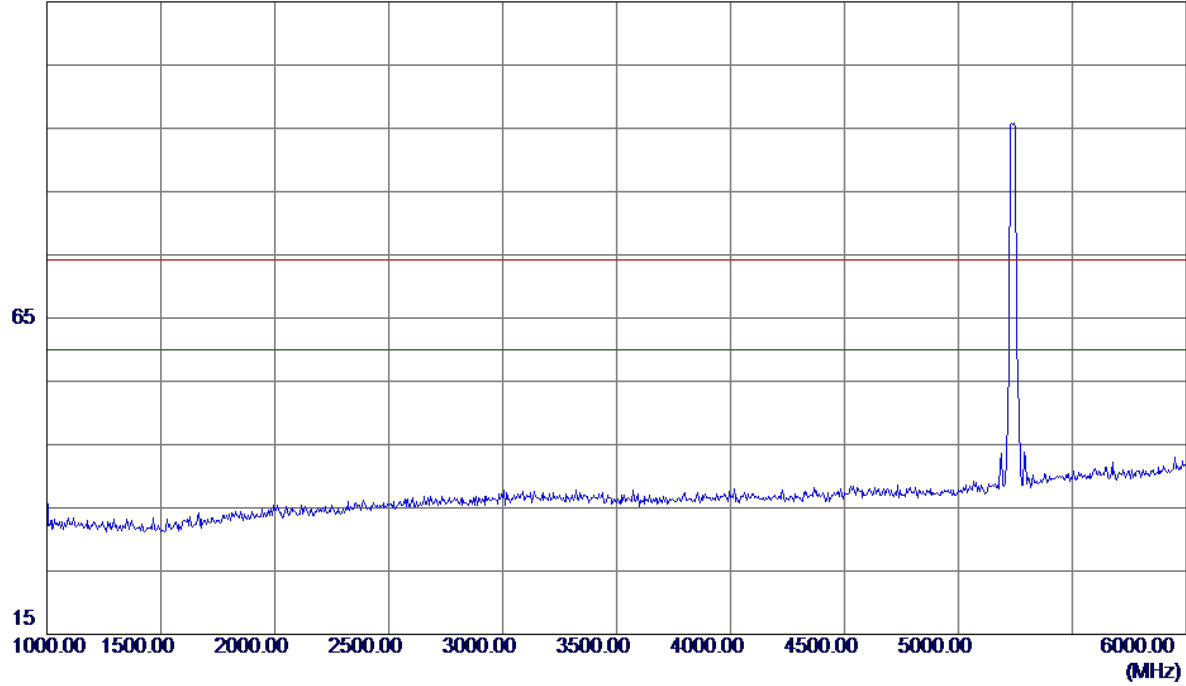


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

115 dBuV/m

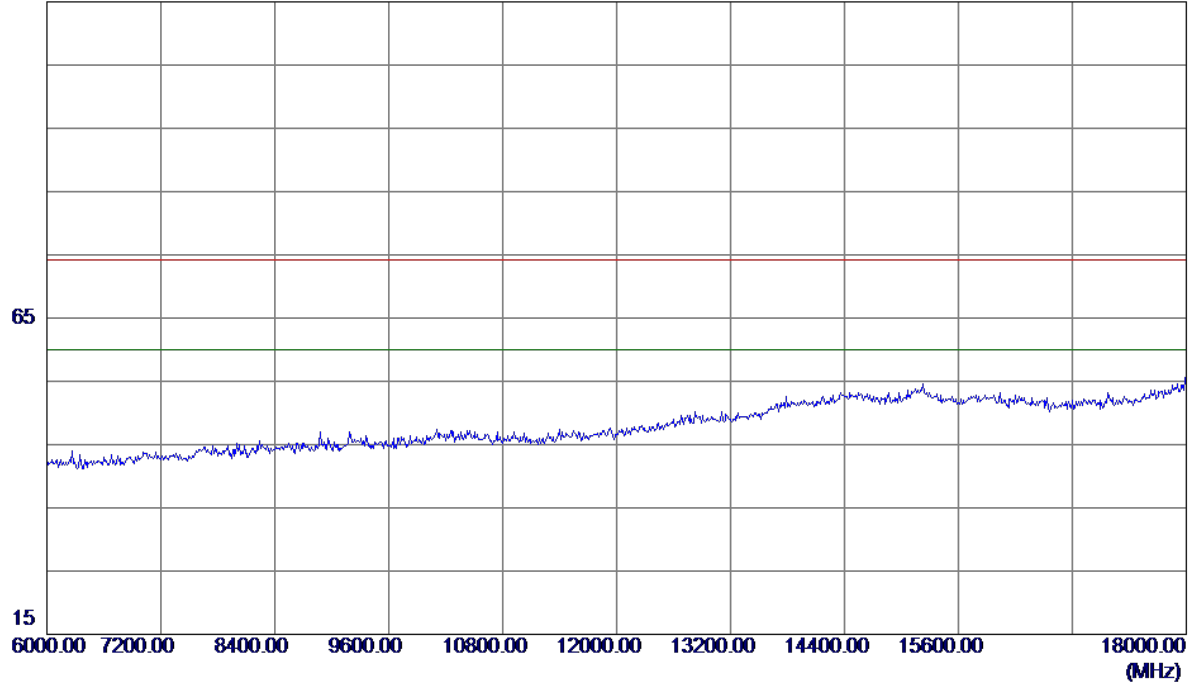


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal


115 dBuV/m

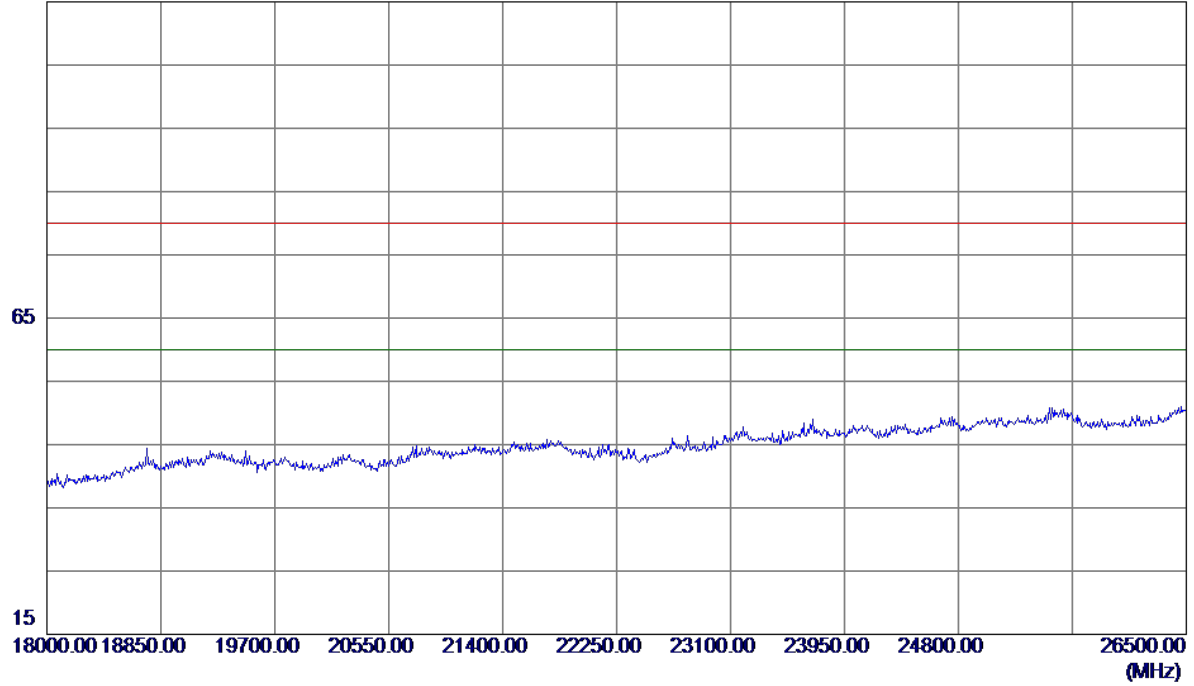

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

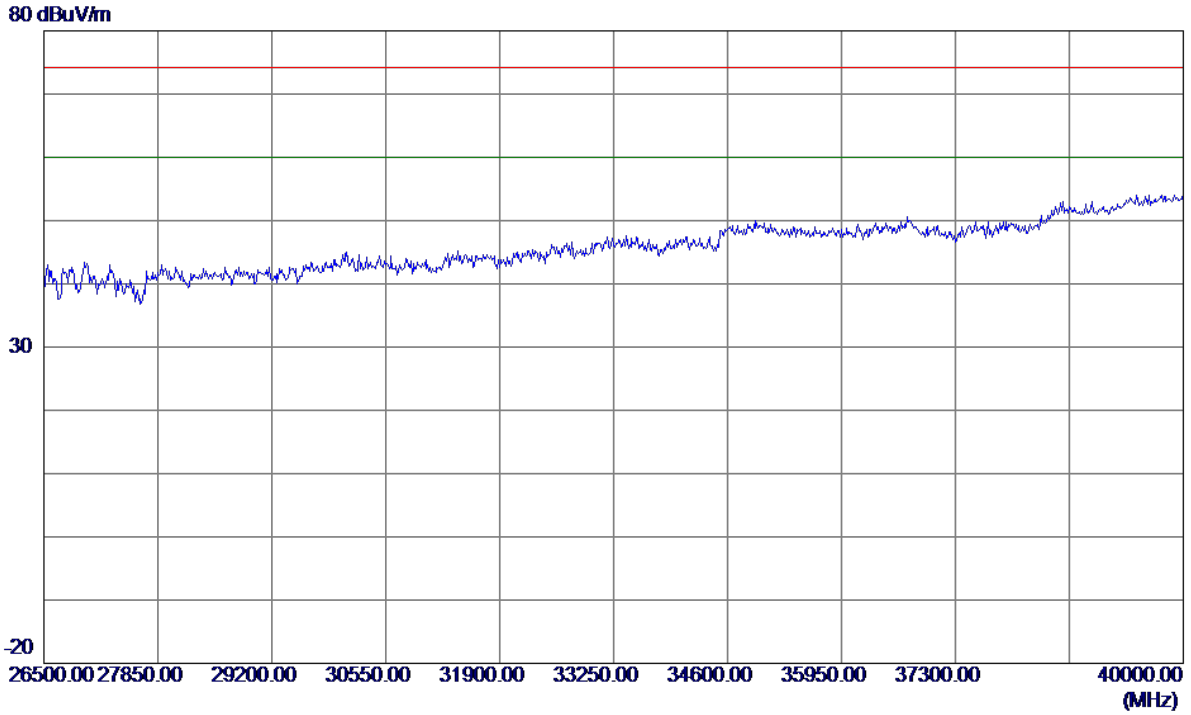


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

120 dBuV/m

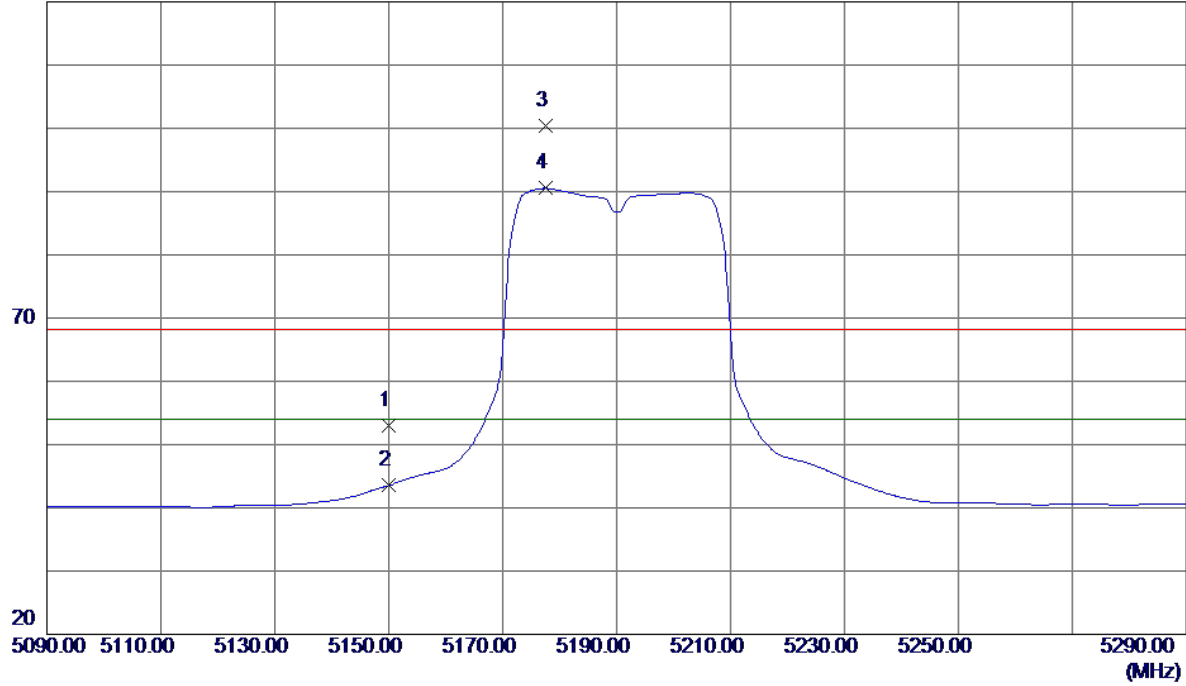


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	12.71	40.32	53.03	68.30	-15.27	Peak	
2	5150.0000	3.20	40.32	43.52	54.00	-10.48	AVG	
3	5177.6000	60.02	40.47	100.49	68.30	32.19	Peak	No Limit
4 *	5177.6000	50.05	40.47	90.52	54.00	36.52	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

115 dBuV/m

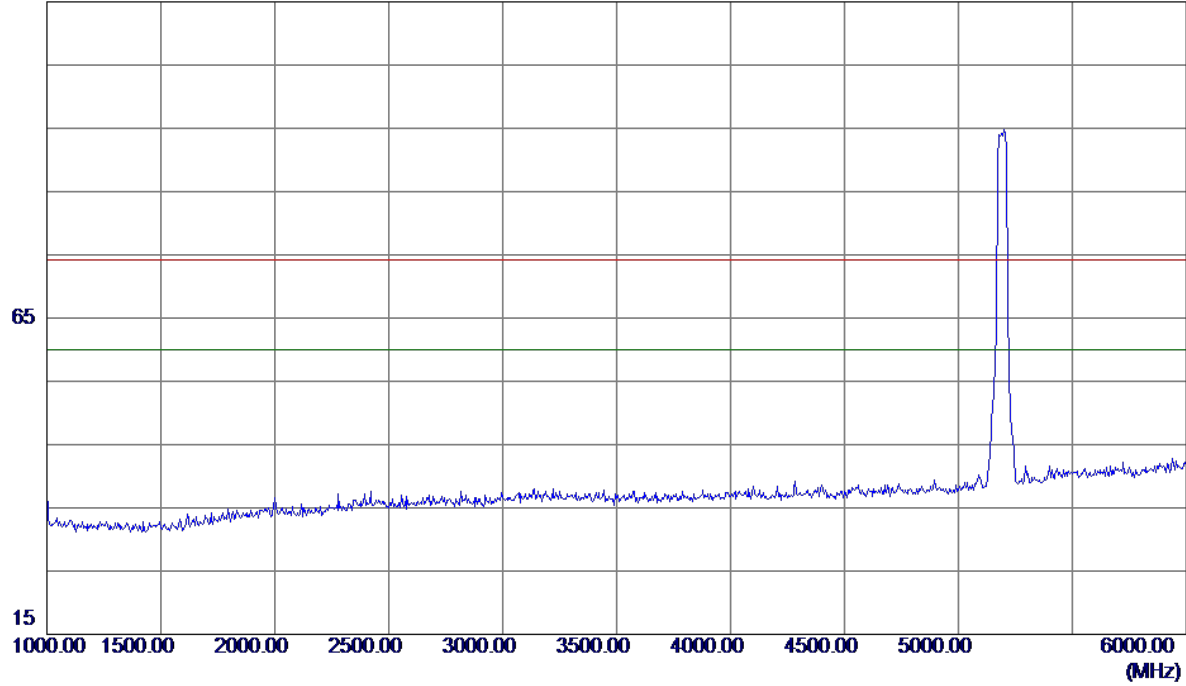


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

115 dBuV/m

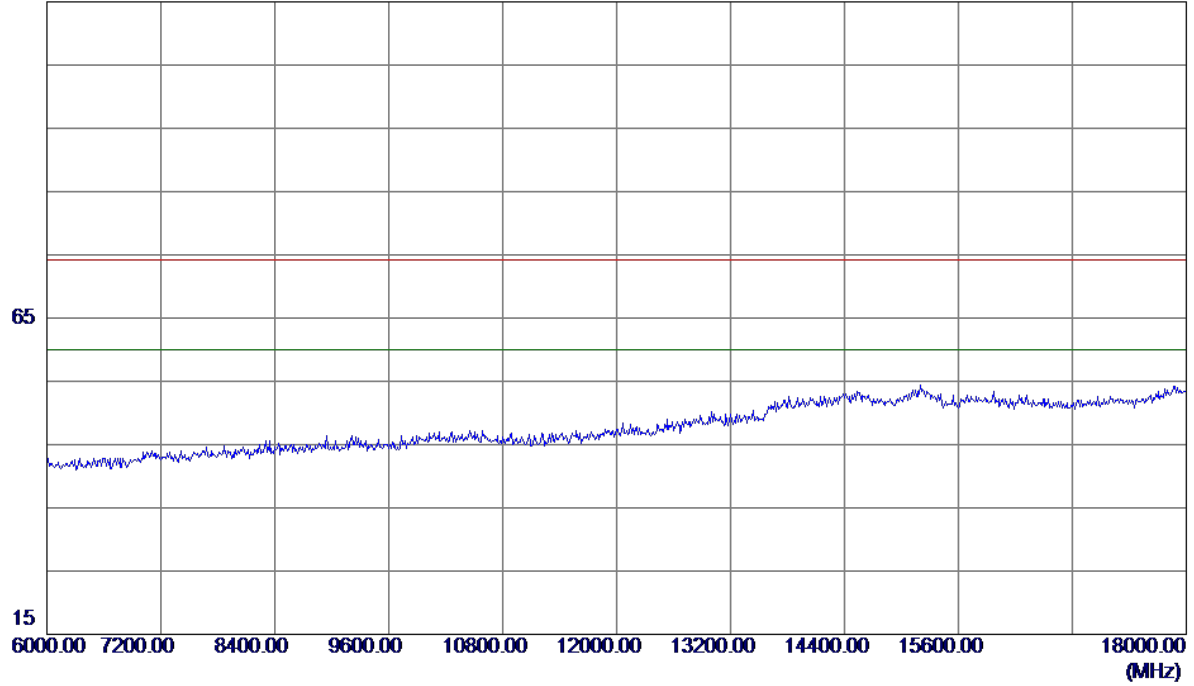


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


115 dBuV/m

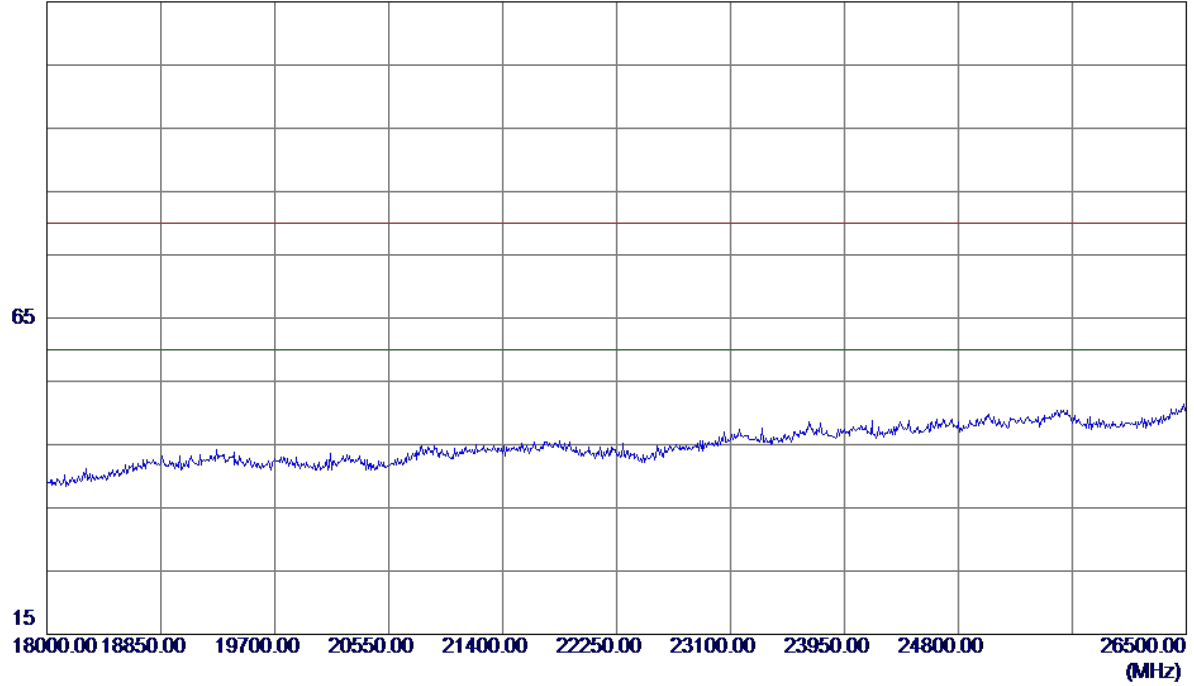

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

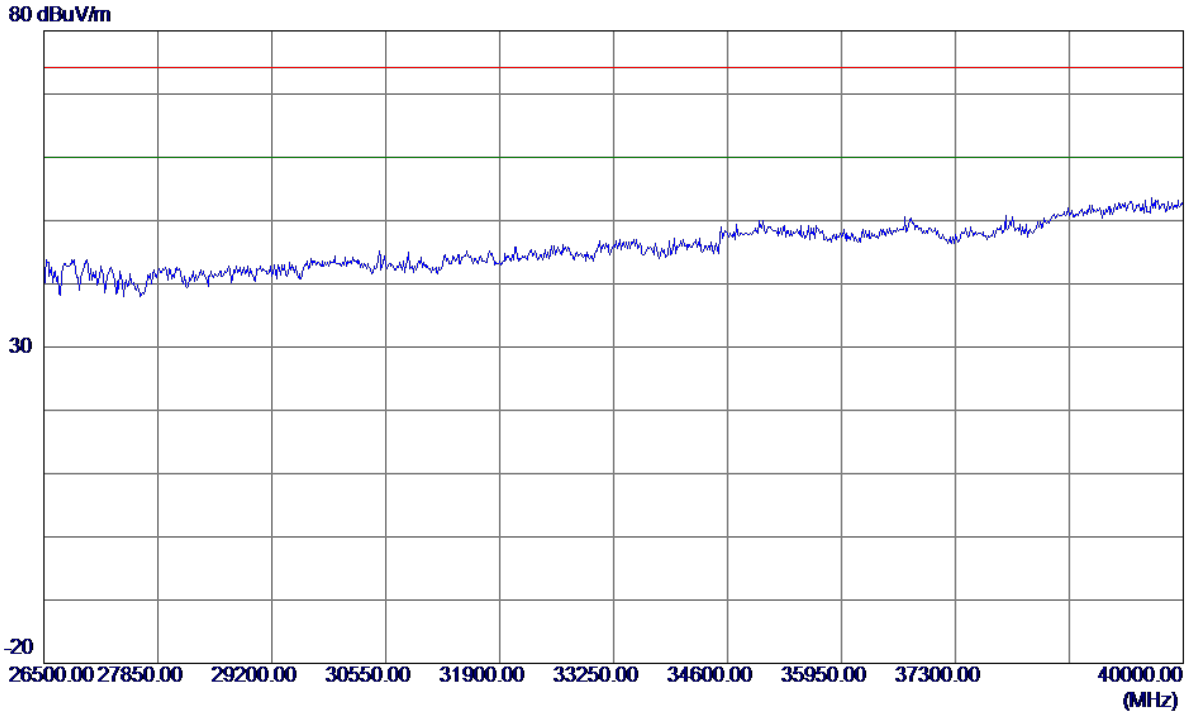

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

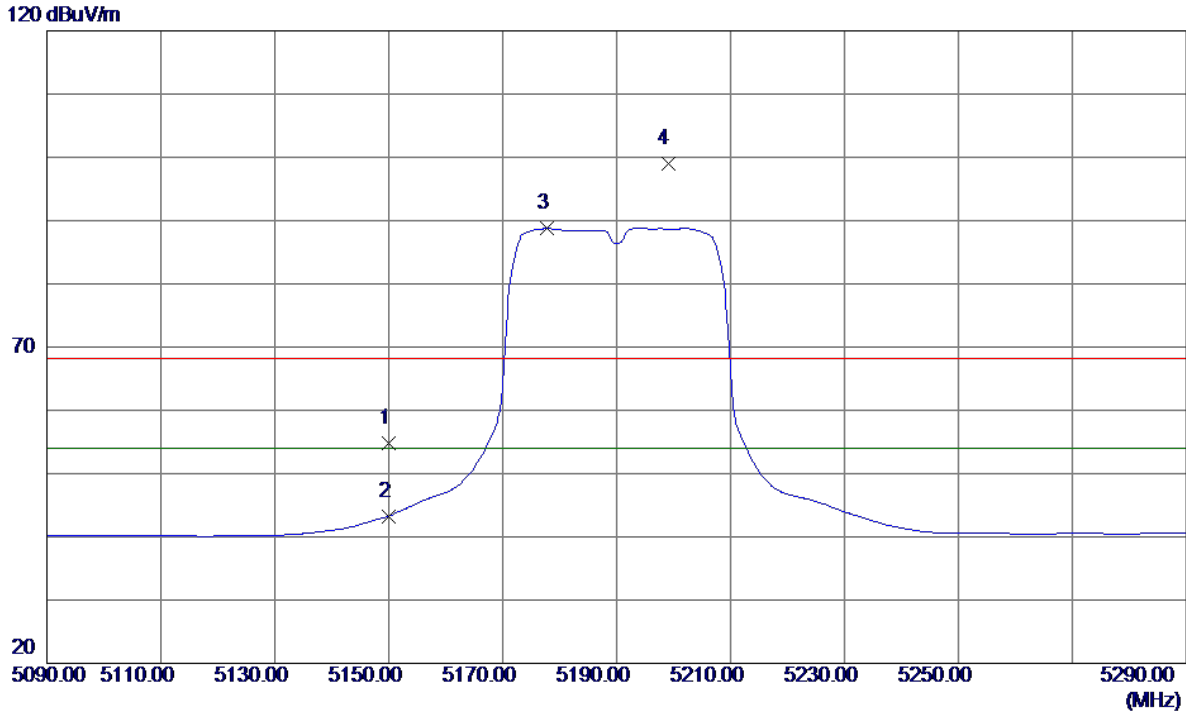


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	14.44	40.32	54.76	68.30	-13.54	Peak	
2	5150.0000	2.96	40.32	43.28	54.00	-10.72	AVG	
3 *	5177.8000	48.28	40.47	88.75	54.00	34.75	AVG	No Limit
4	5199.0000	58.52	40.58	99.10	68.30	30.80	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

115 dBuV/m

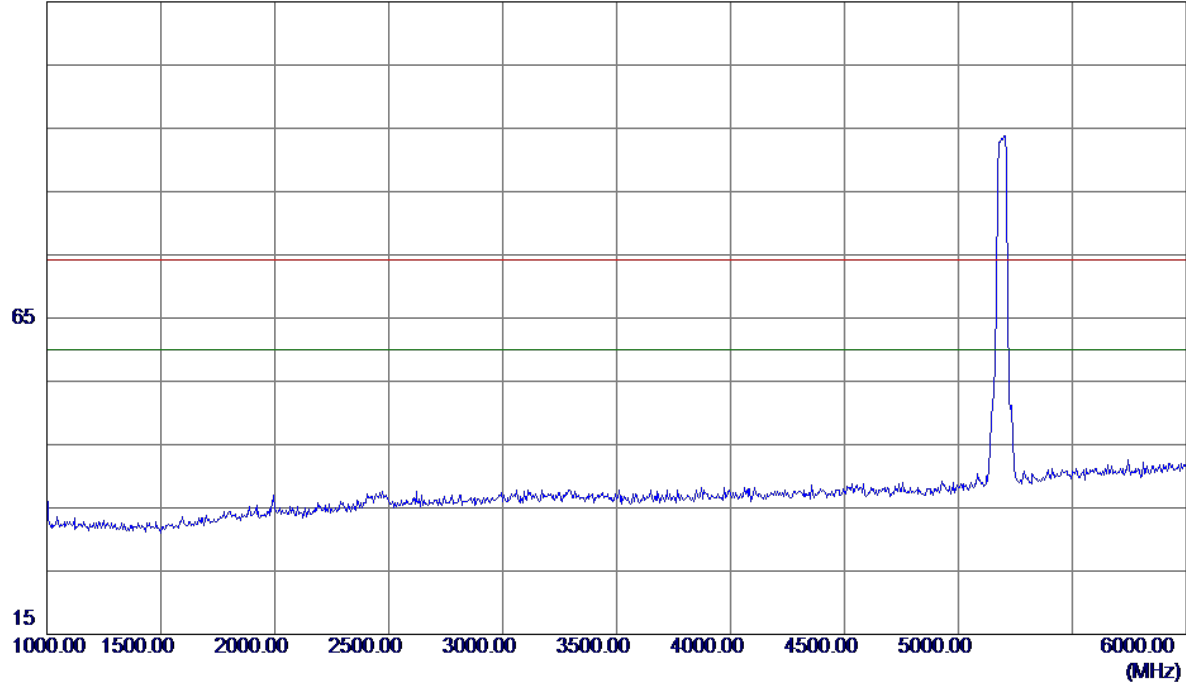


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

115 dBuV/m

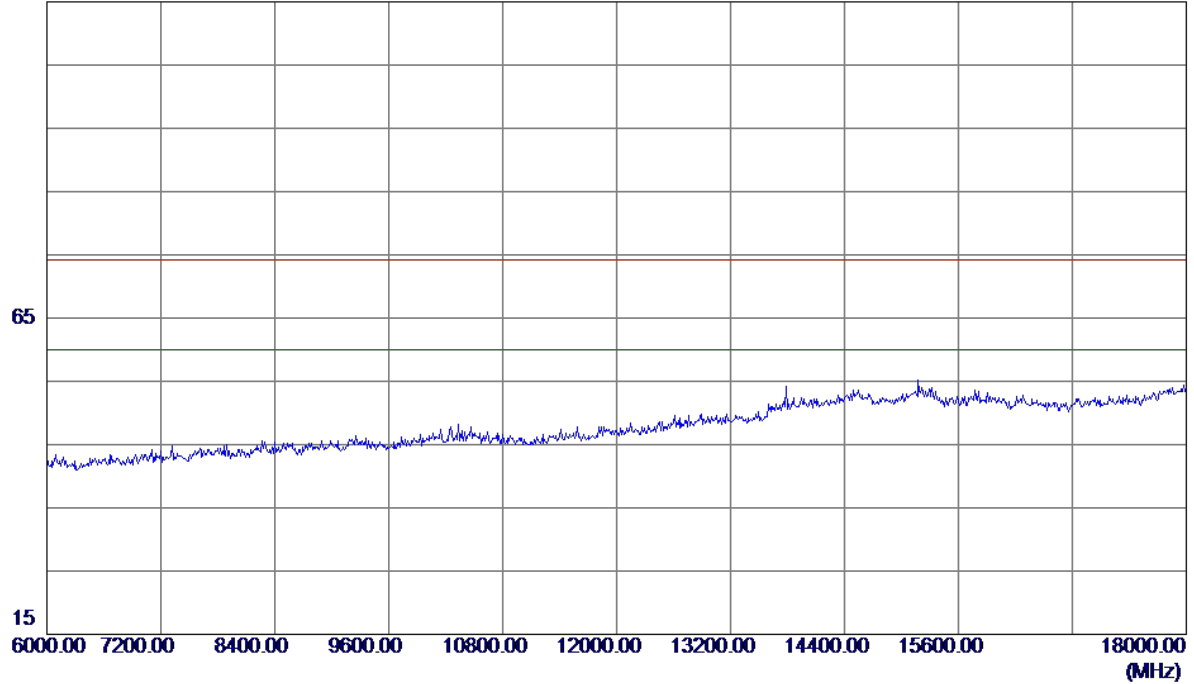


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal


115 dBuV/m

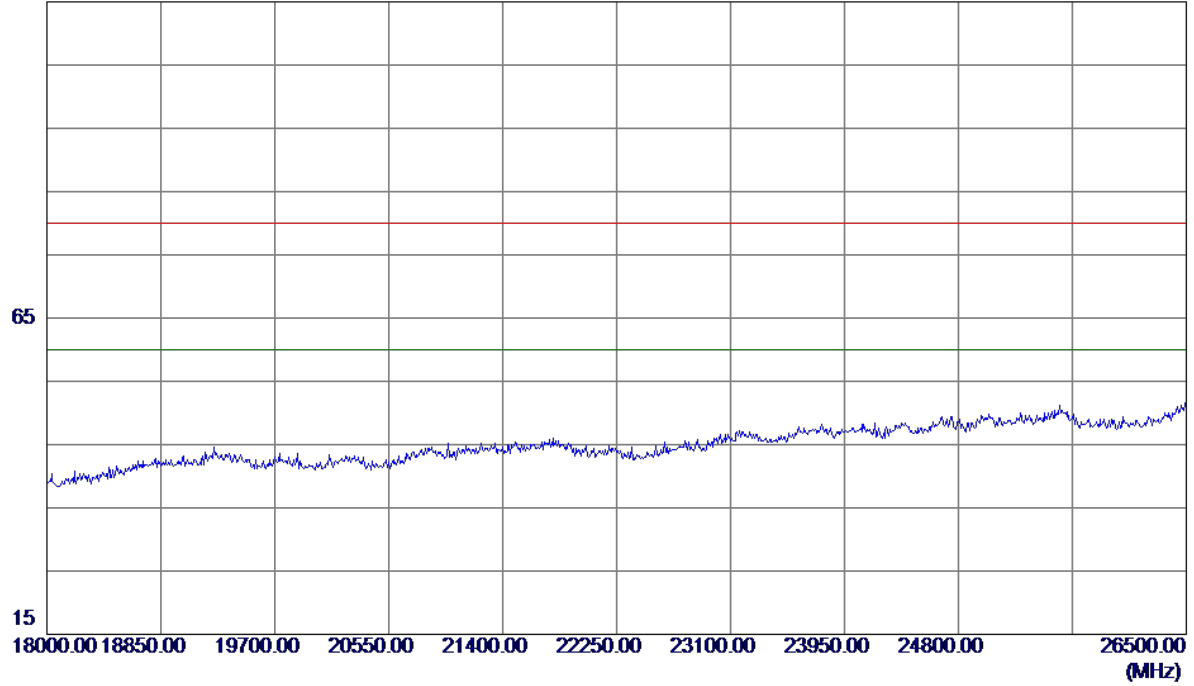

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

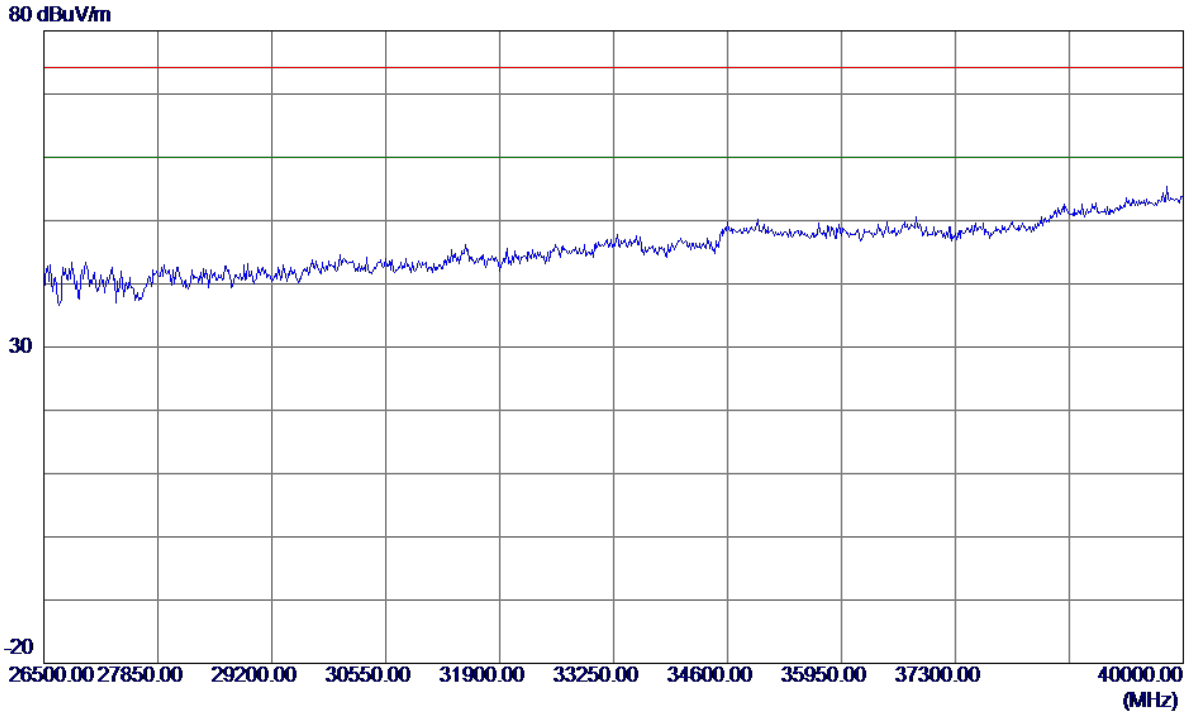


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

120 dBuV/m

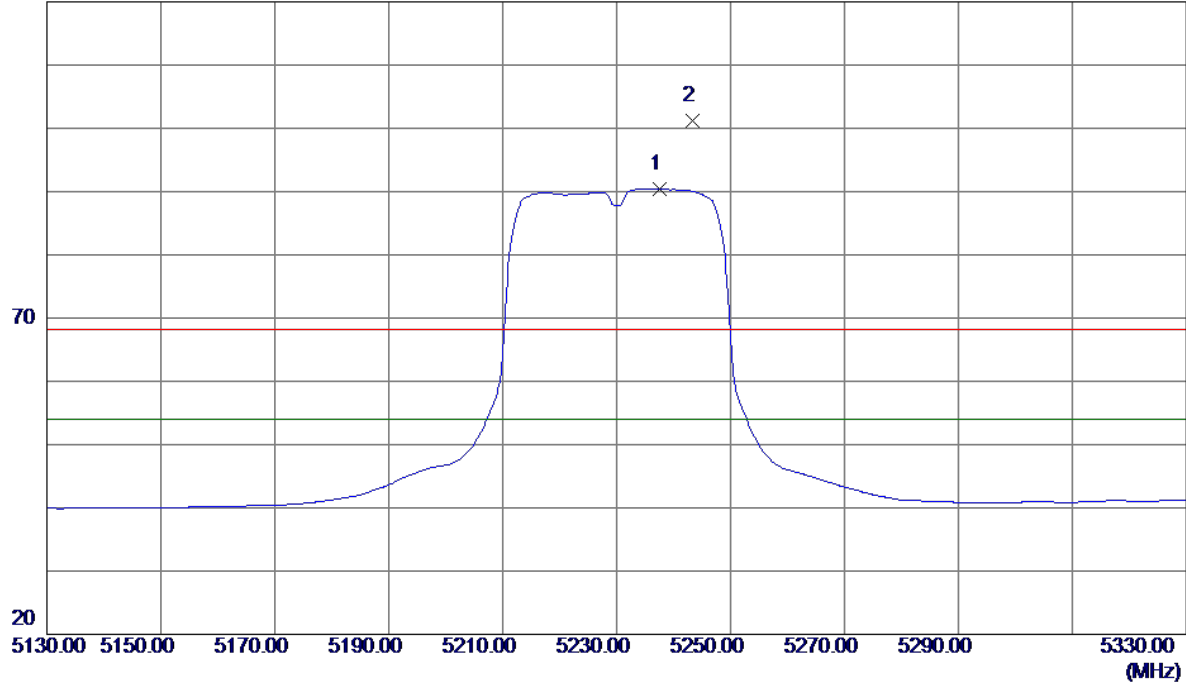


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5237.6000	49.59	40.79	90.38	54.00	36.38	AVG	No Limit
2	5243.4000	60.45	40.82	101.27	68.30	32.97	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

115 dBuV/m

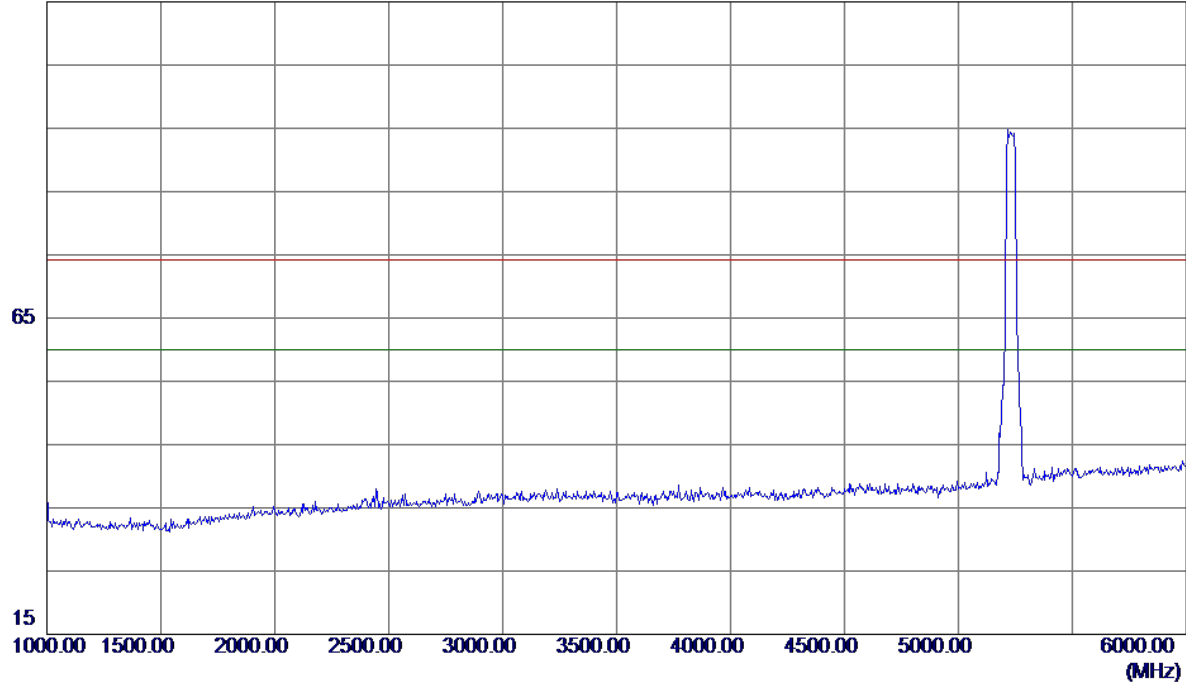


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

115 dBuV/m

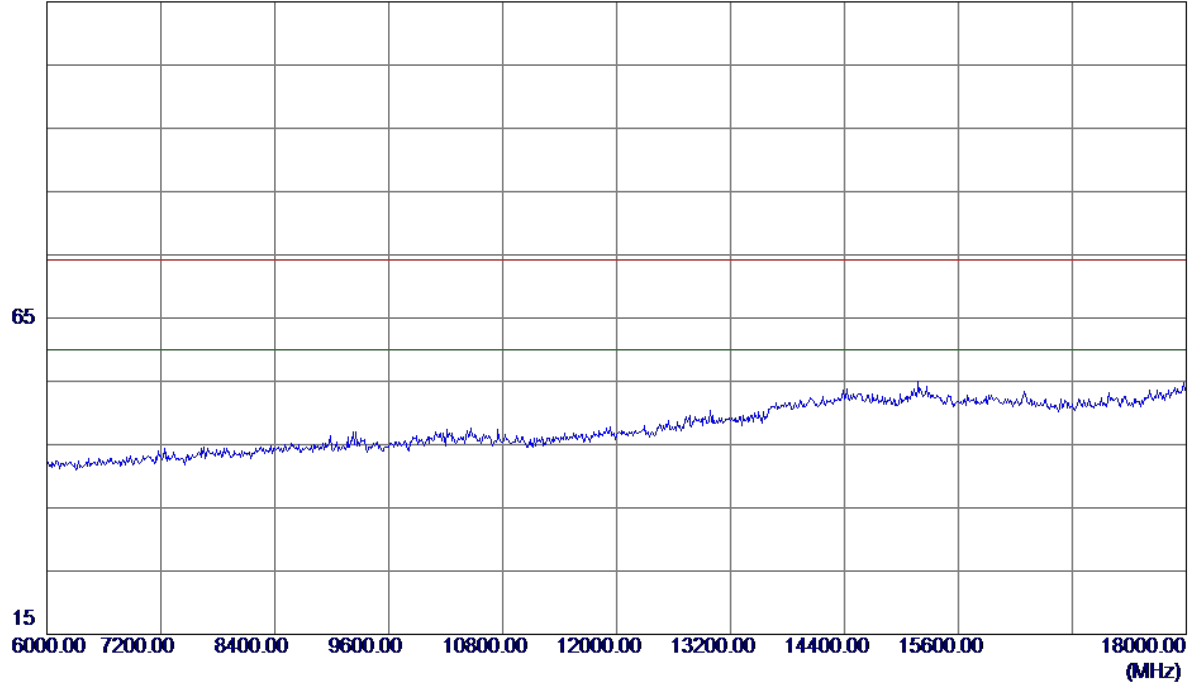


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical


115 dBuV/m

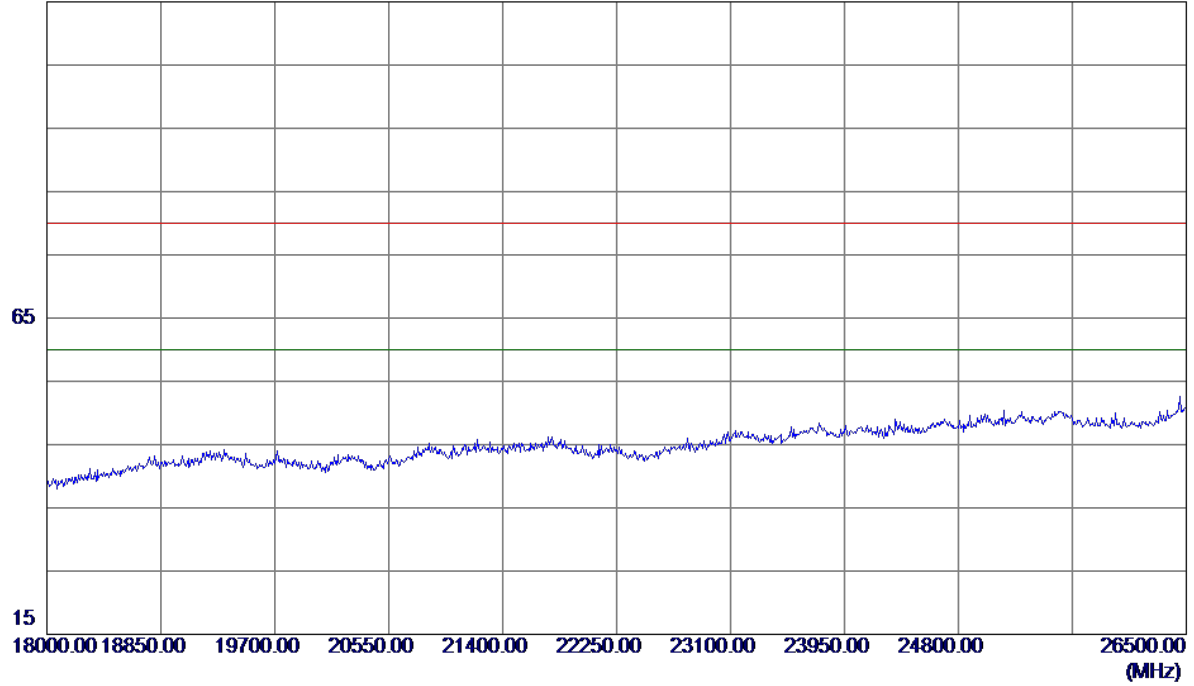

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

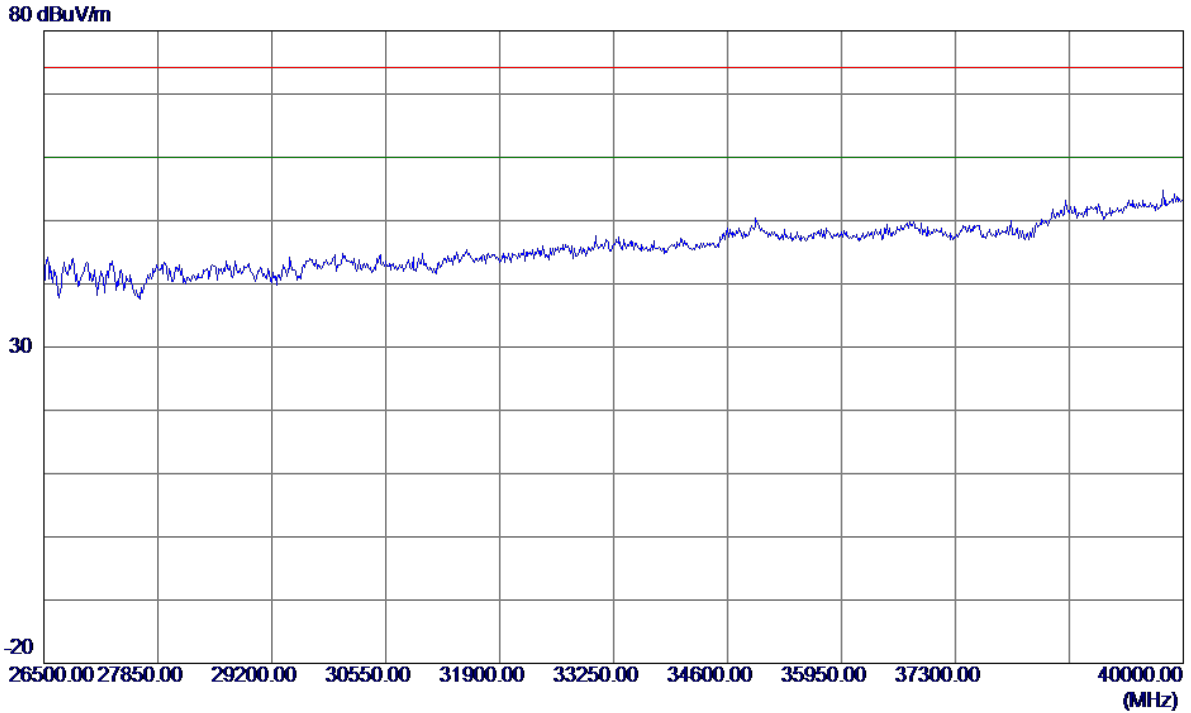

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

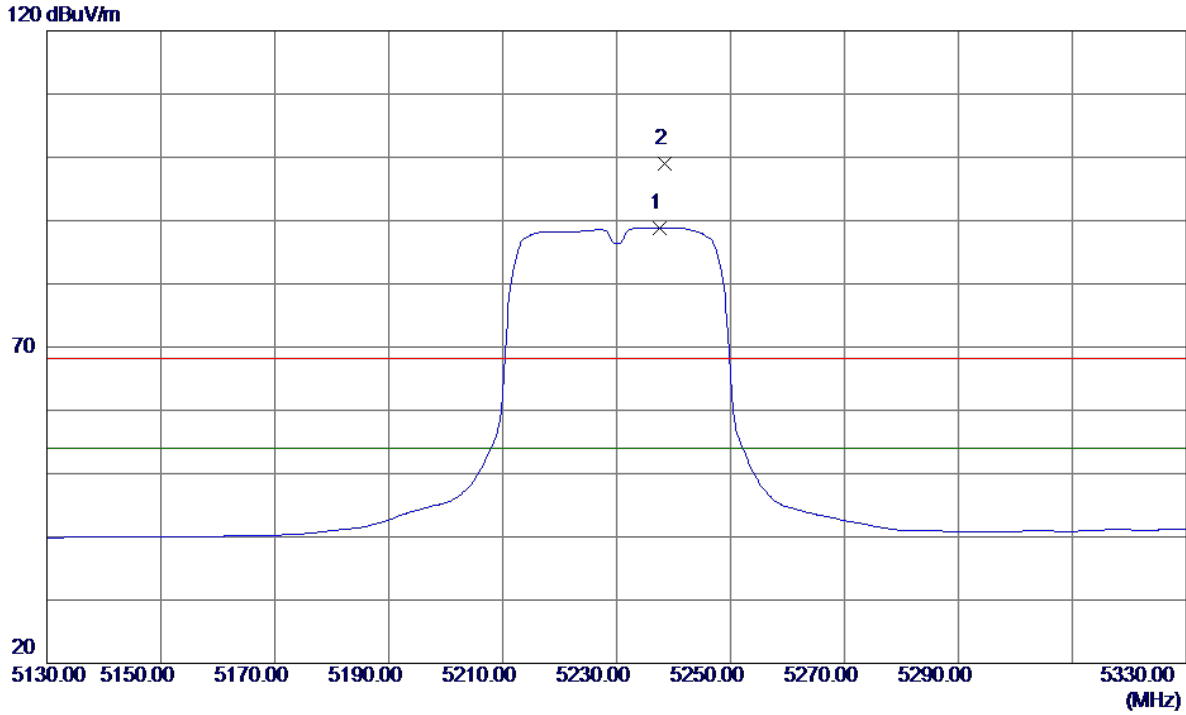


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5237.6000	48.04	40.79	88.83	54.00	34.83	AVG	No Limit
2	5238.4000	58.20	40.79	98.99	68.30	30.69	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

115 dBuV/m

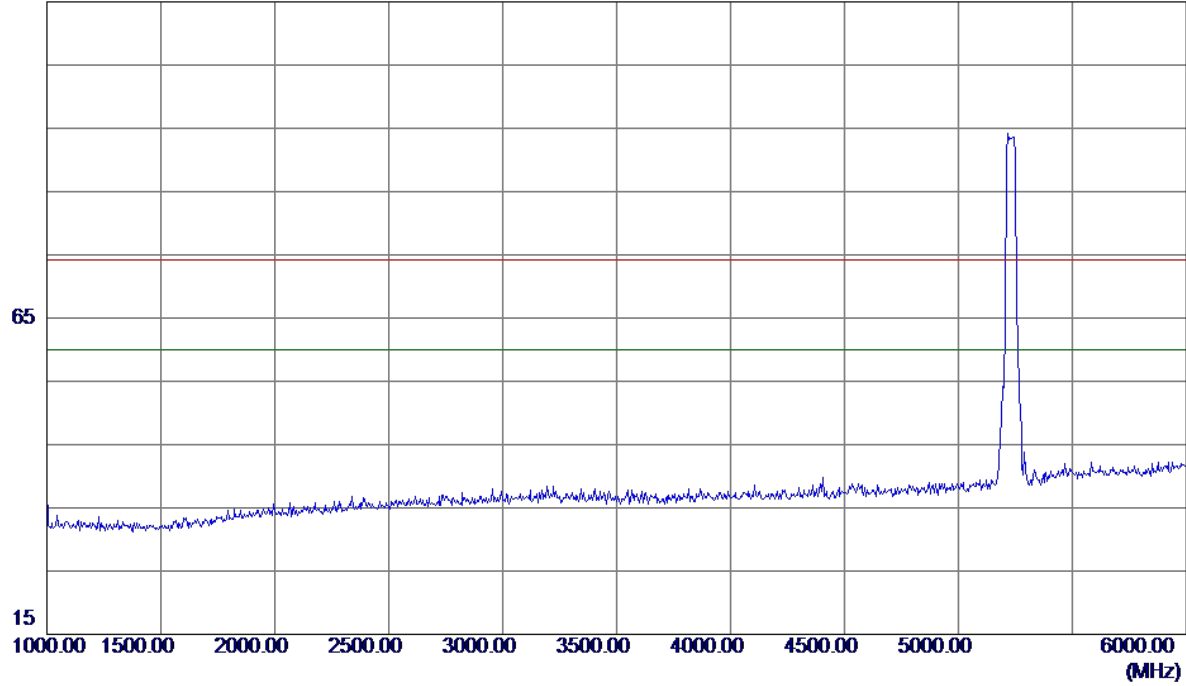


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

115 dBuV/m

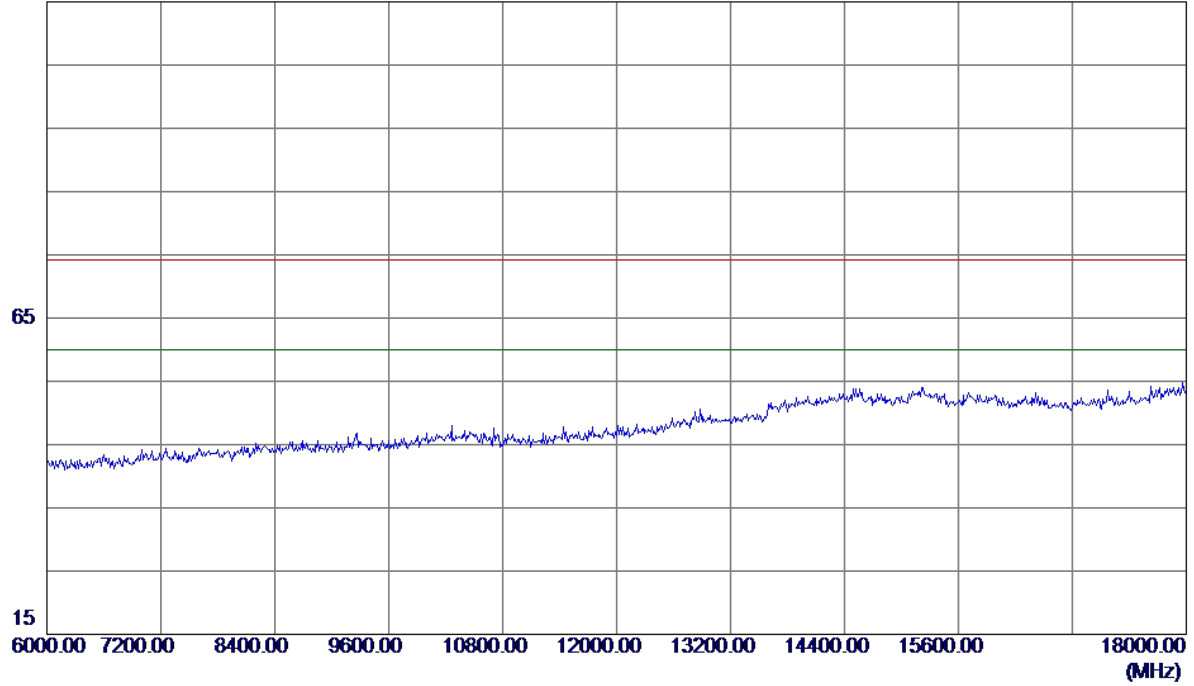


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal


115 dBuV/m

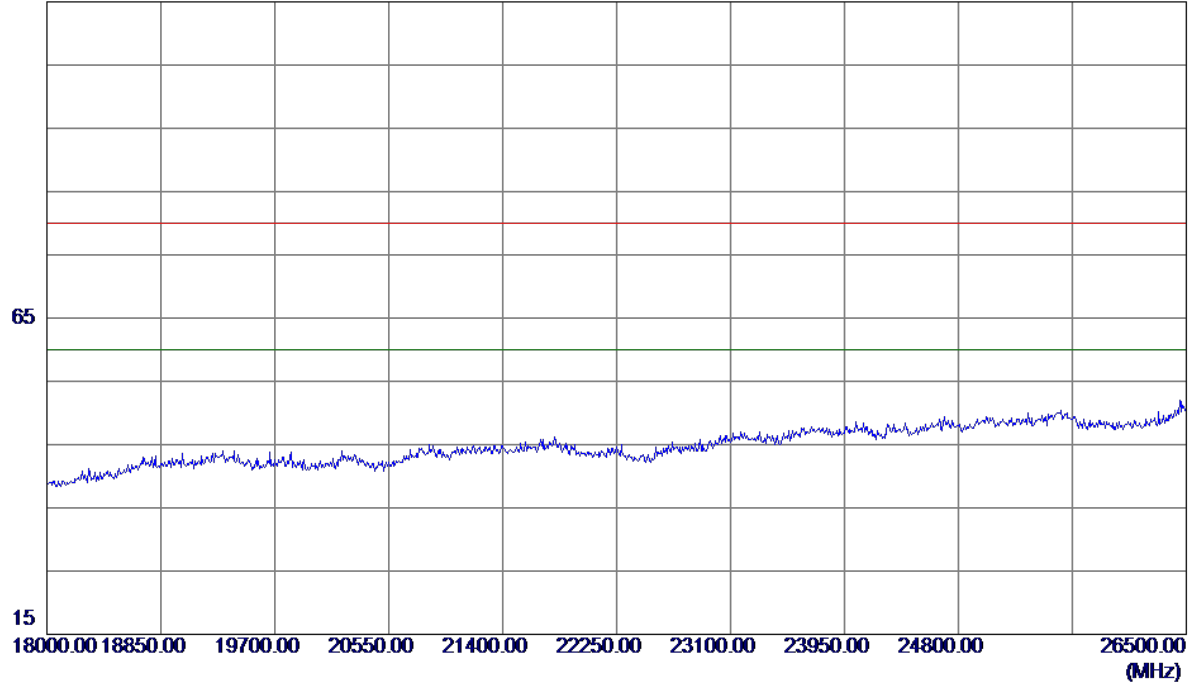

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

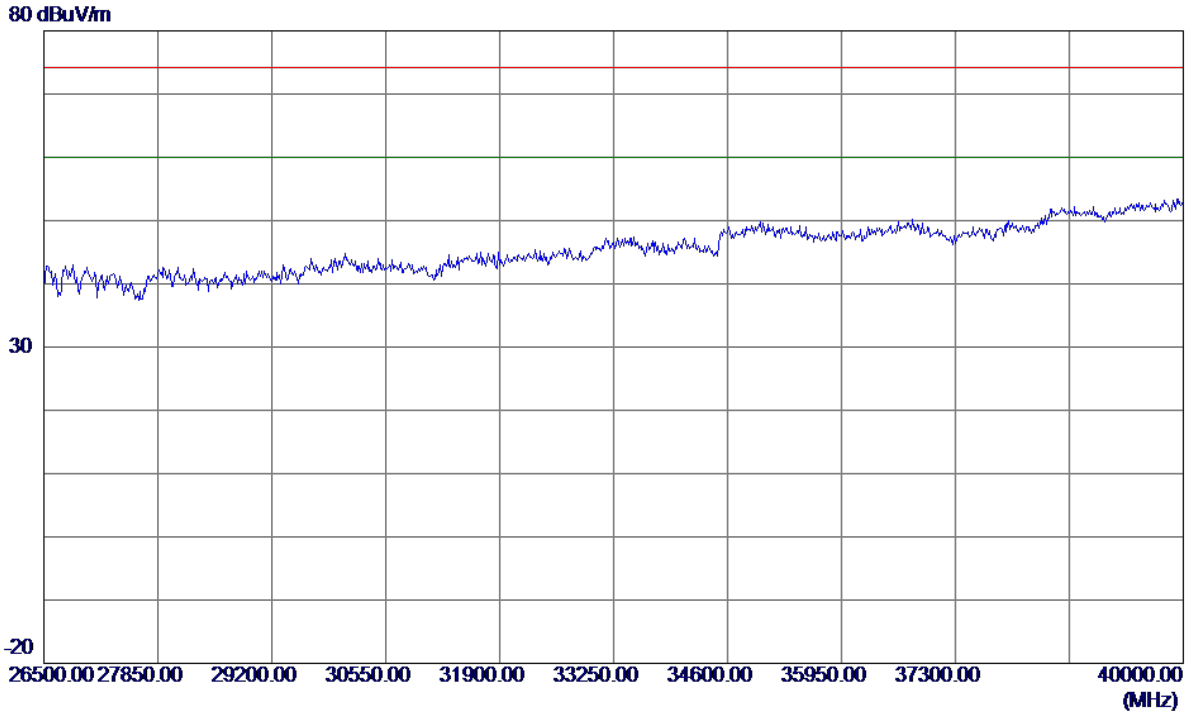

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

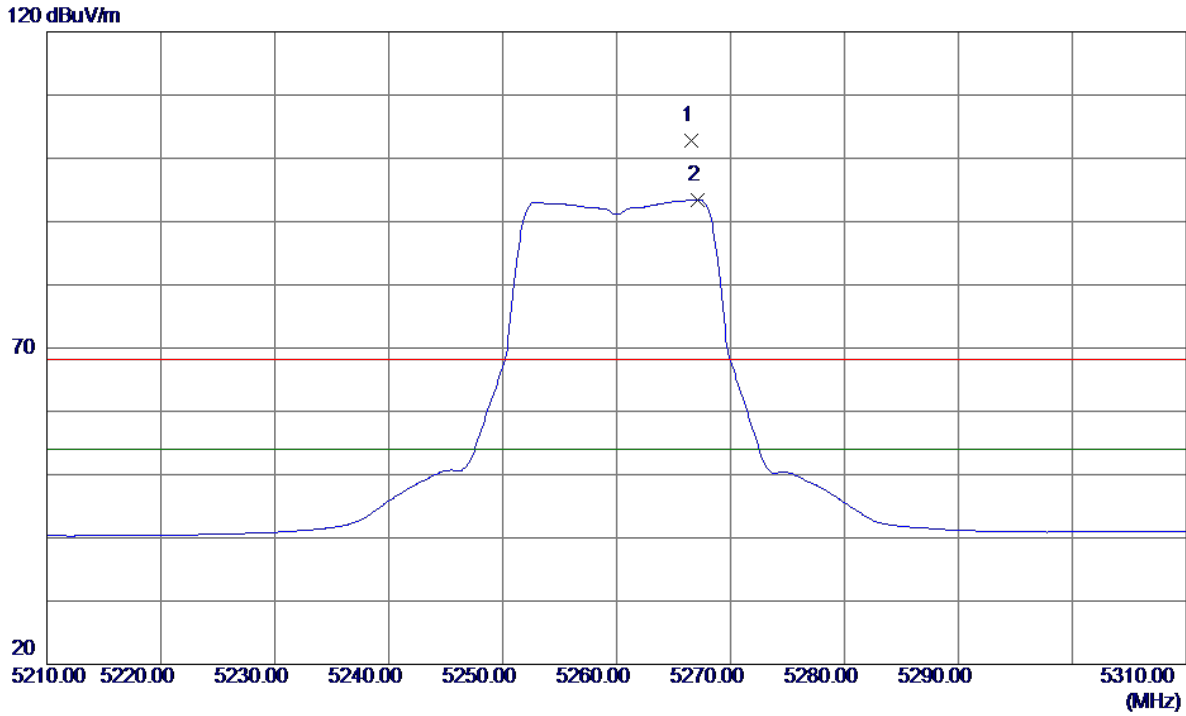


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5266.6000	61.85	40.94	102.79	68.30	34.49	Peak	No Limit
2 *	5267.1000	52.53	40.95	93.48	54.00	39.48	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

115 dBuV/m

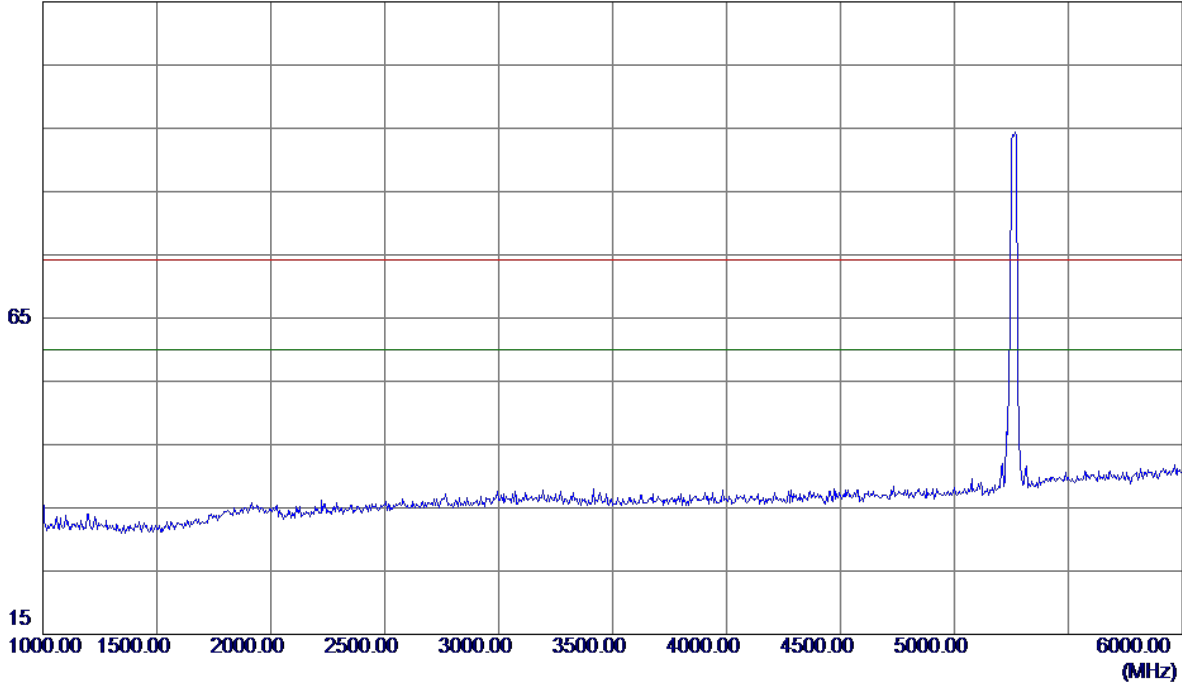


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

115 dBuV/m

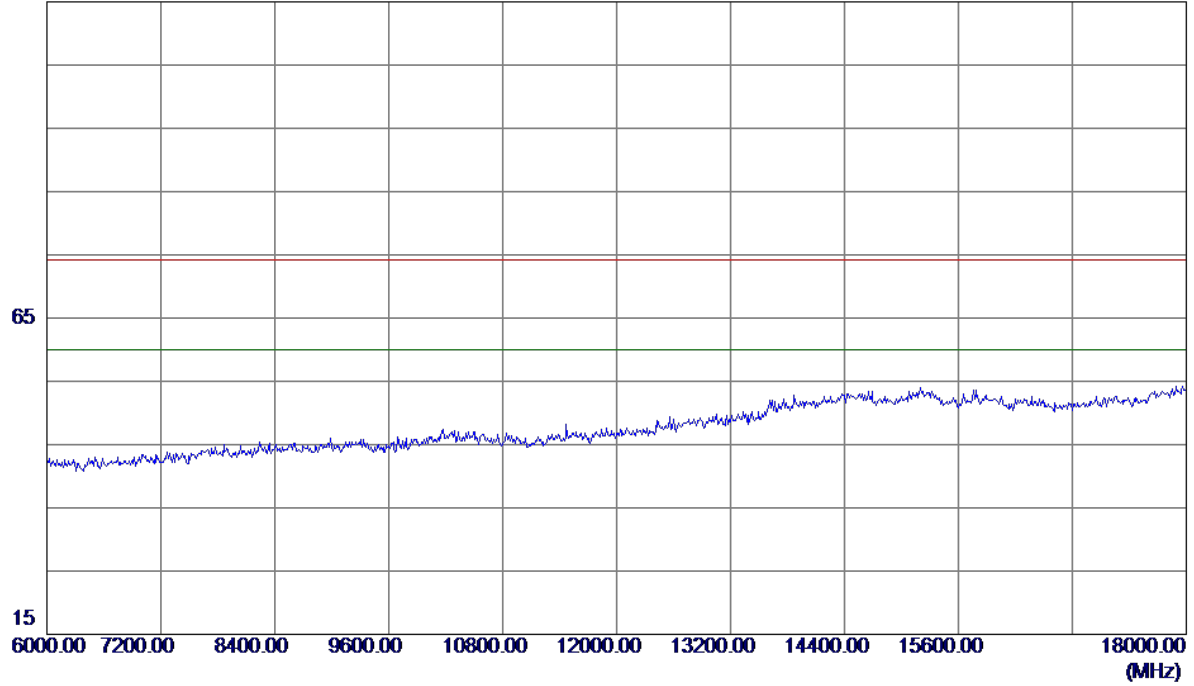


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical


115 dBuV/m

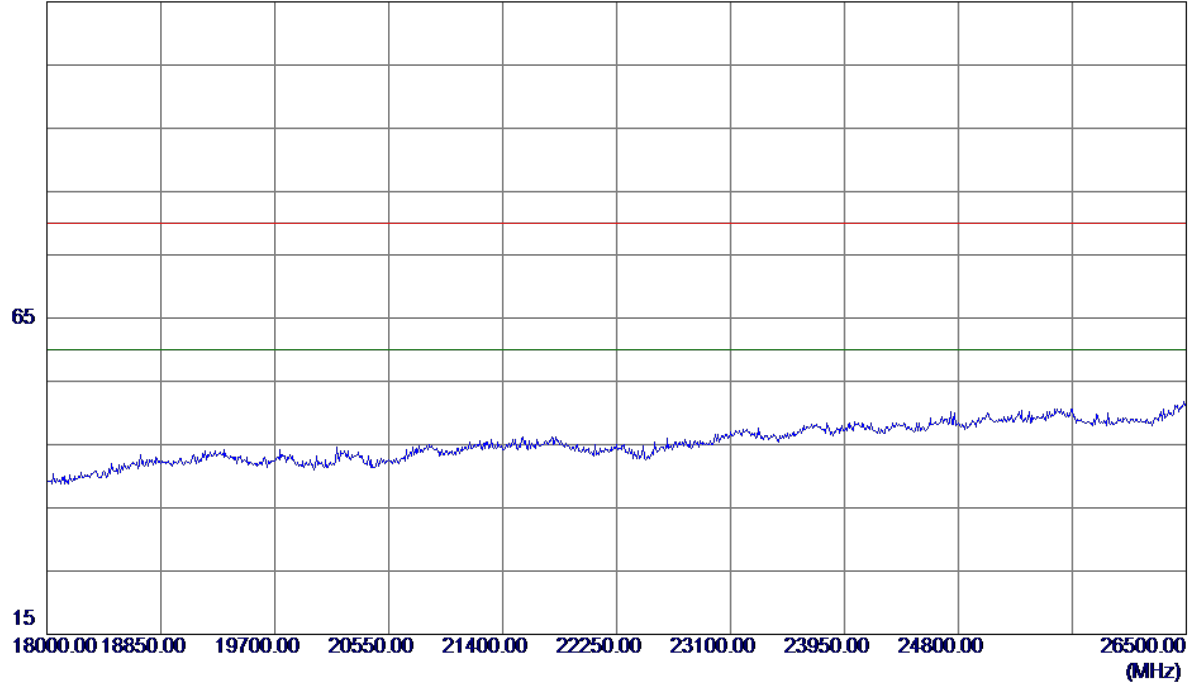

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

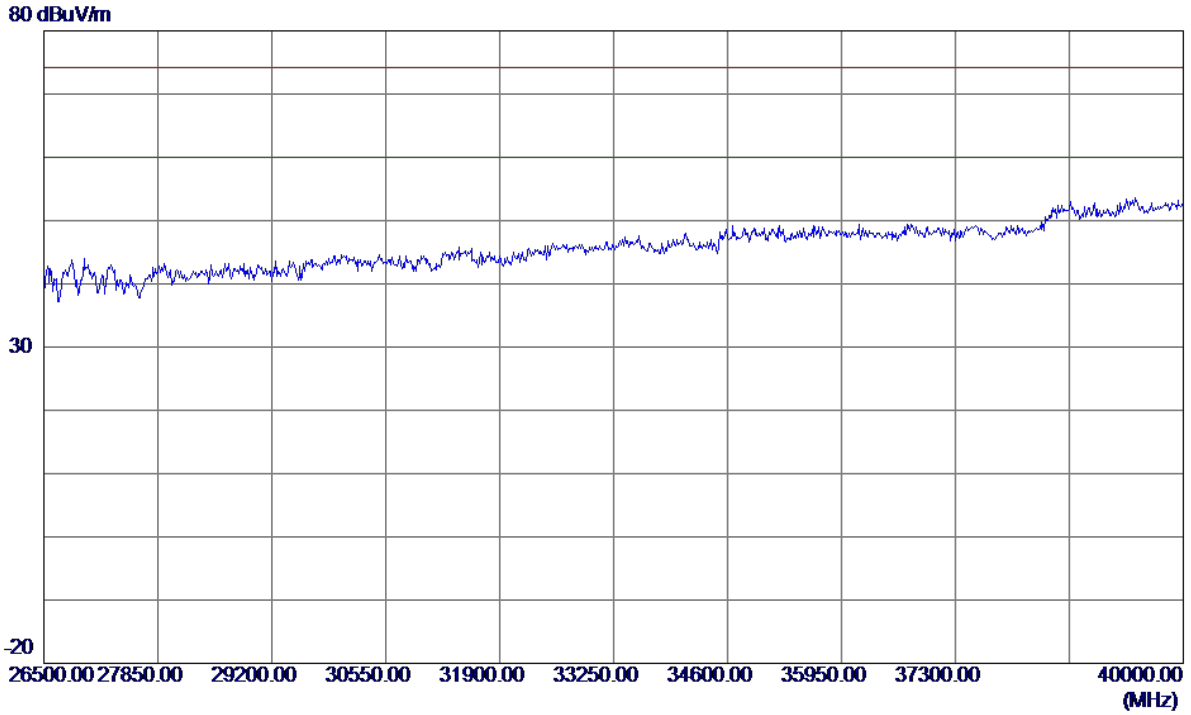

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

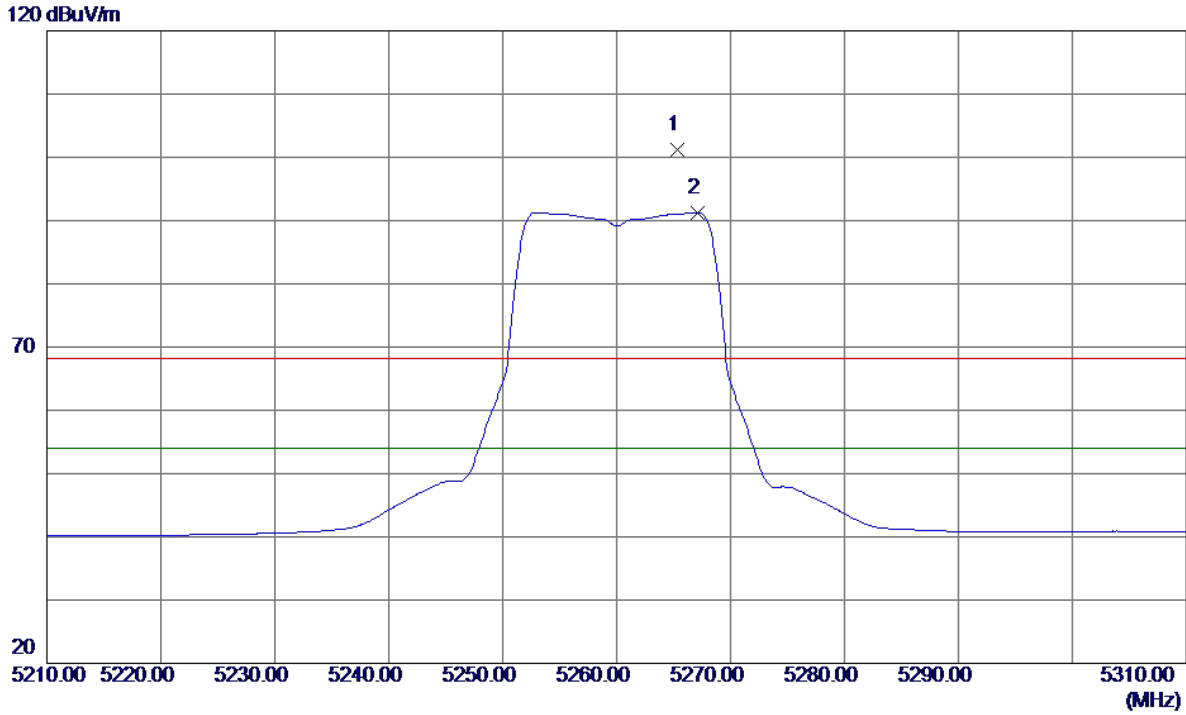


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5265.3000	60.21	40.94	101.15	68.30	32.85	Peak	No Limit
2 *	5267.1000	50.27	40.95	91.22	54.00	37.22	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

115 dBuV/m

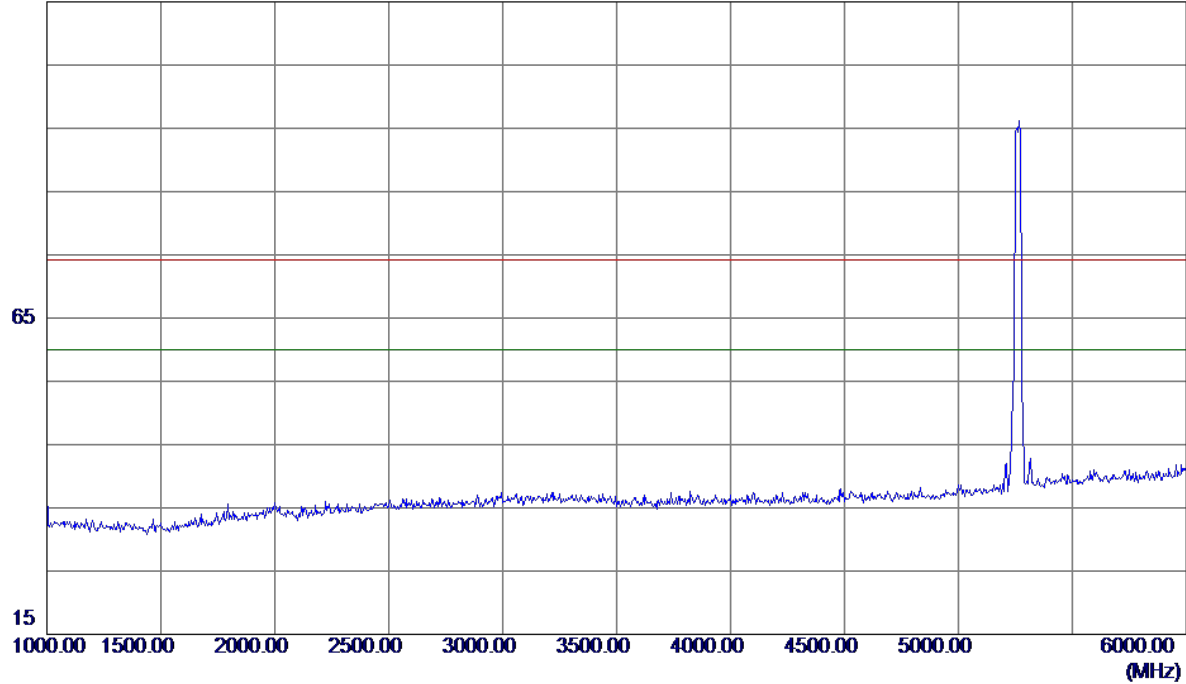


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

115 dBuV/m

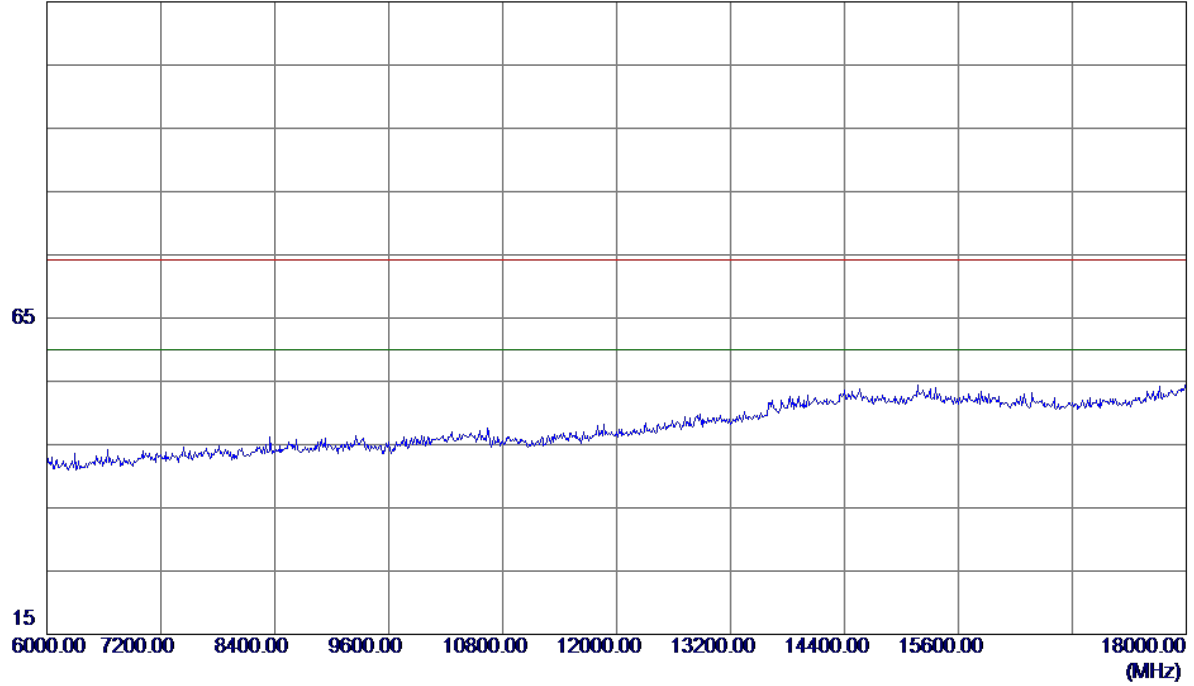


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal


115 dBuV/m

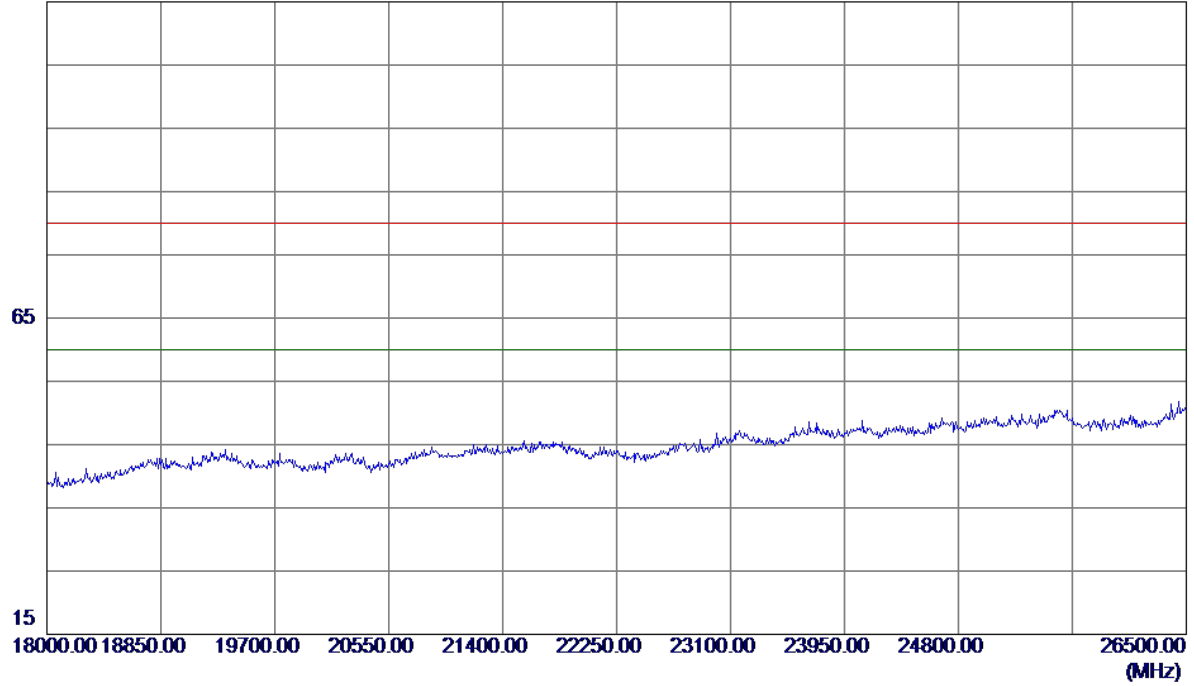

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

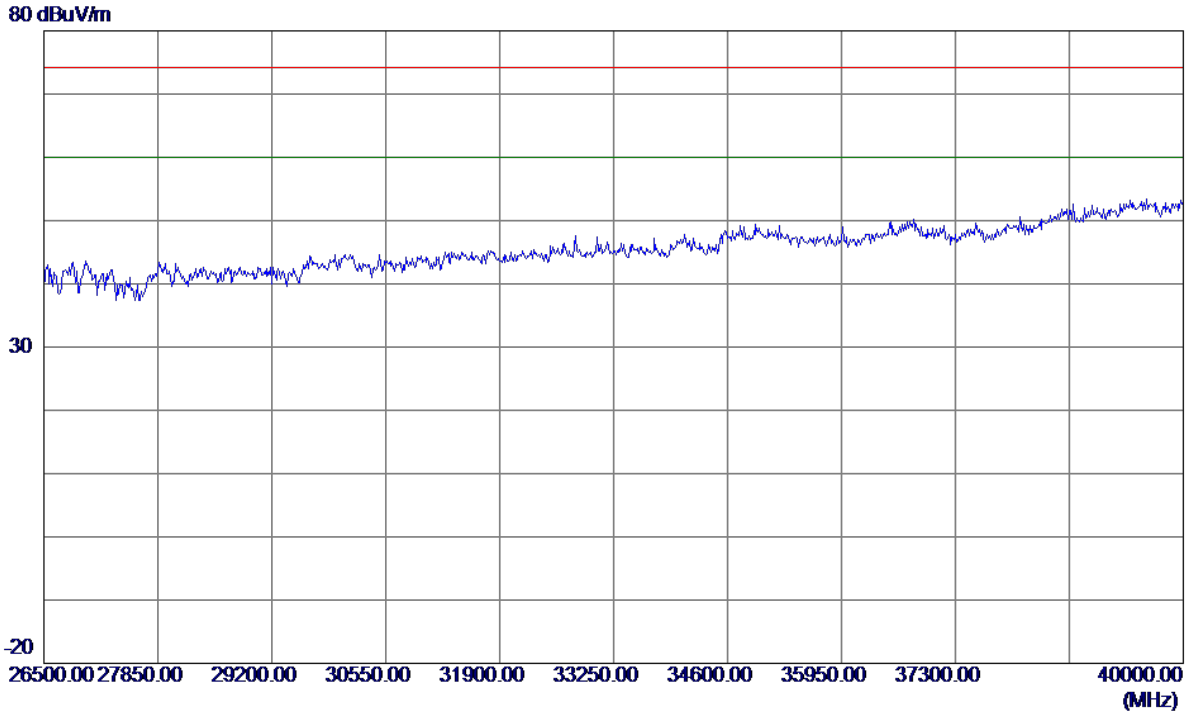


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

120 dBuV/m

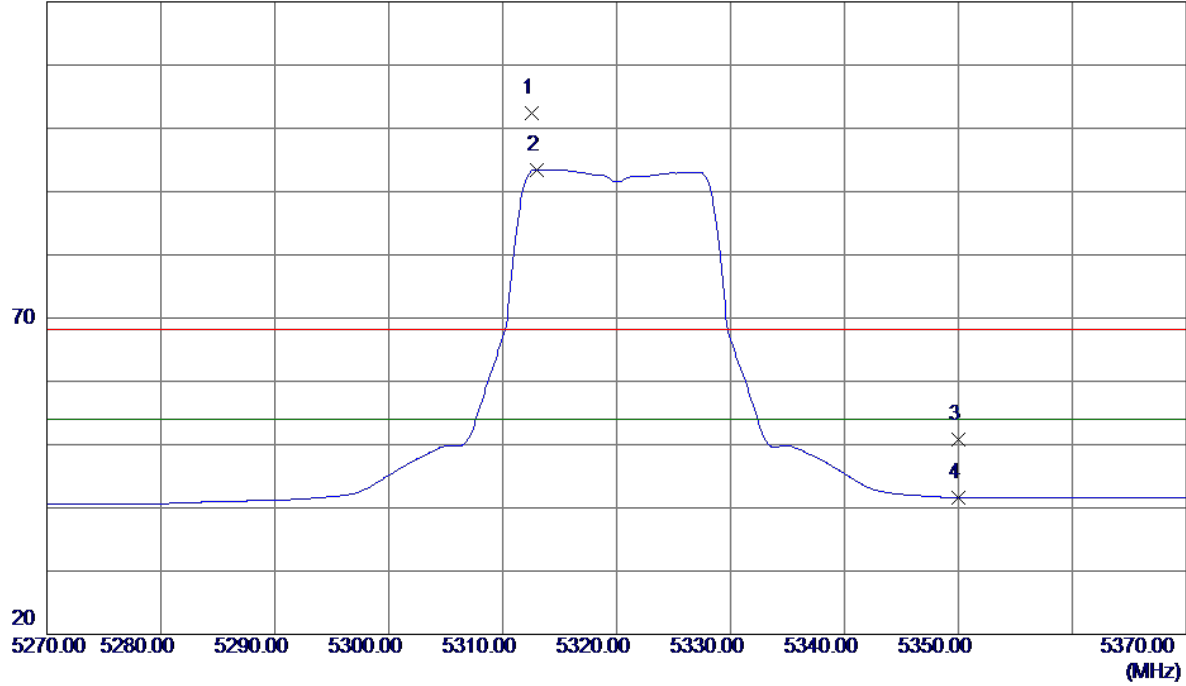


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5312.6000	61.25	41.19	102.44	68.30	34.14	Peak	No Limit
2 *	5313.0000	52.28	41.19	93.47	54.00	39.47	AVG	No Limit
3	5350.0000	9.45	41.38	50.83	68.30	-17.47	Peak	
4	5350.0000	0.23	41.38	41.61	54.00	-12.39	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

115 dBuV/m

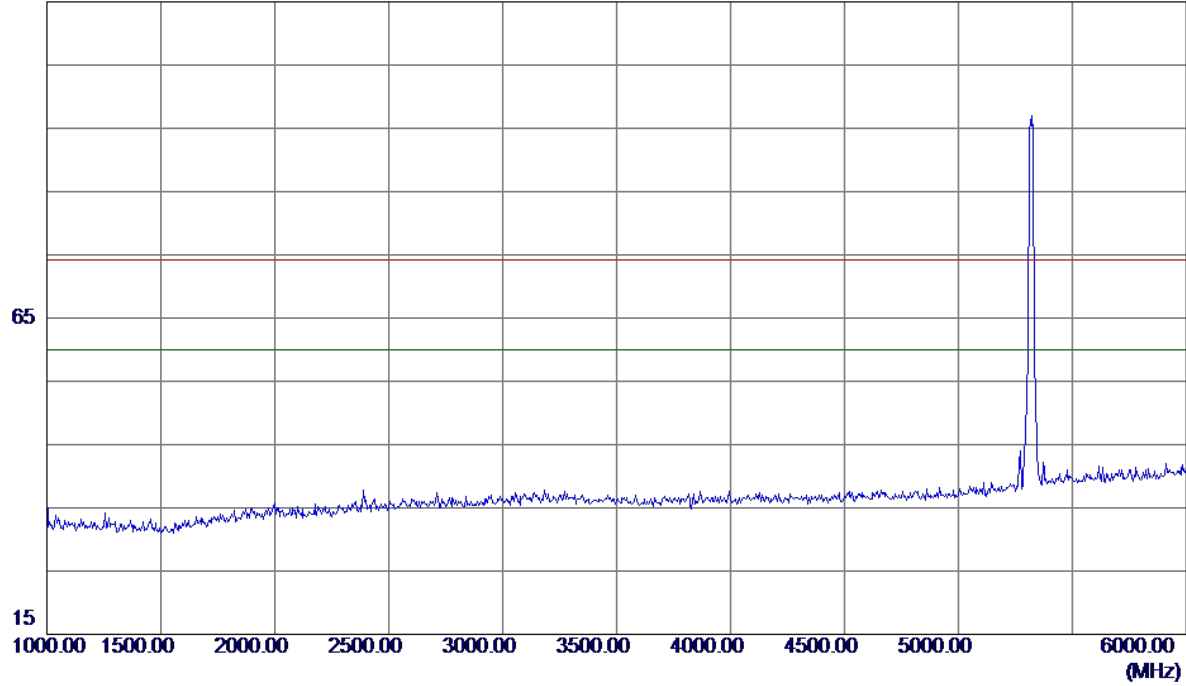


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

115 dBuV/m

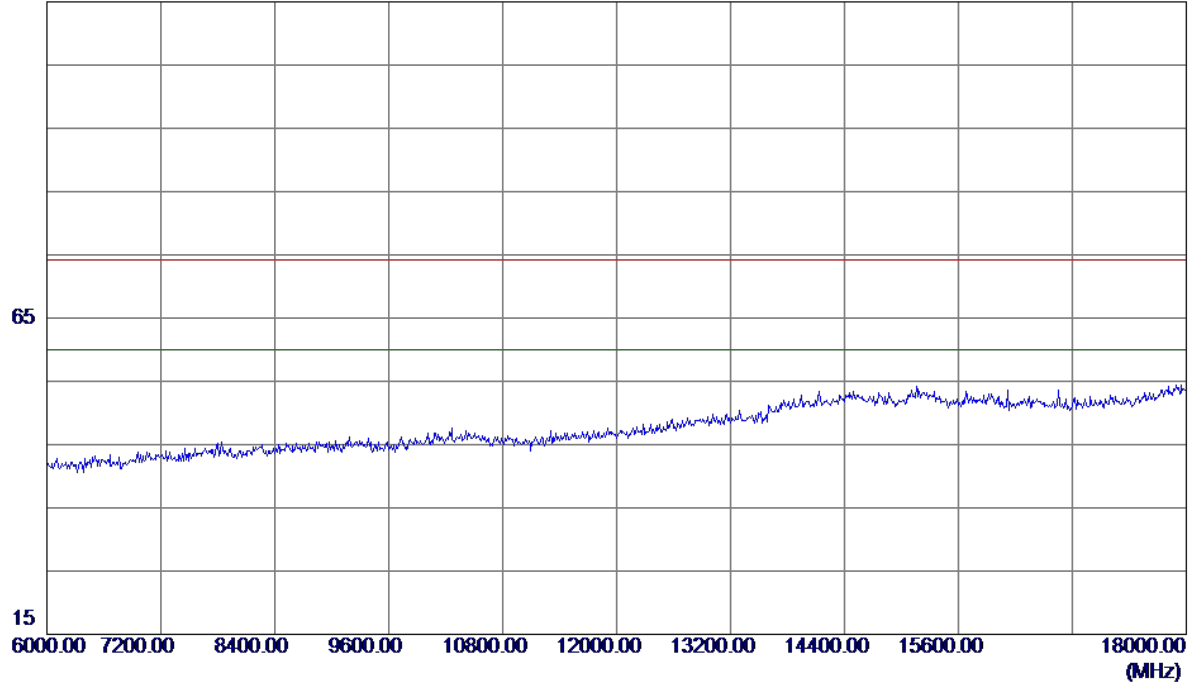


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical


115 dBuV/m

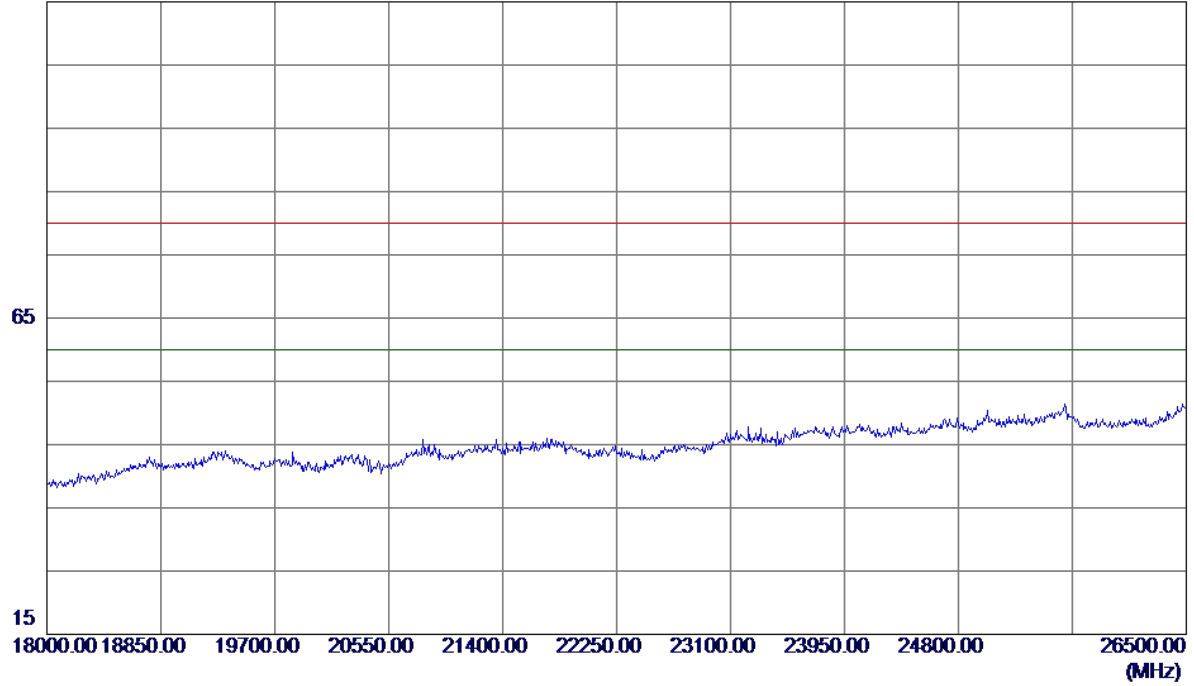

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

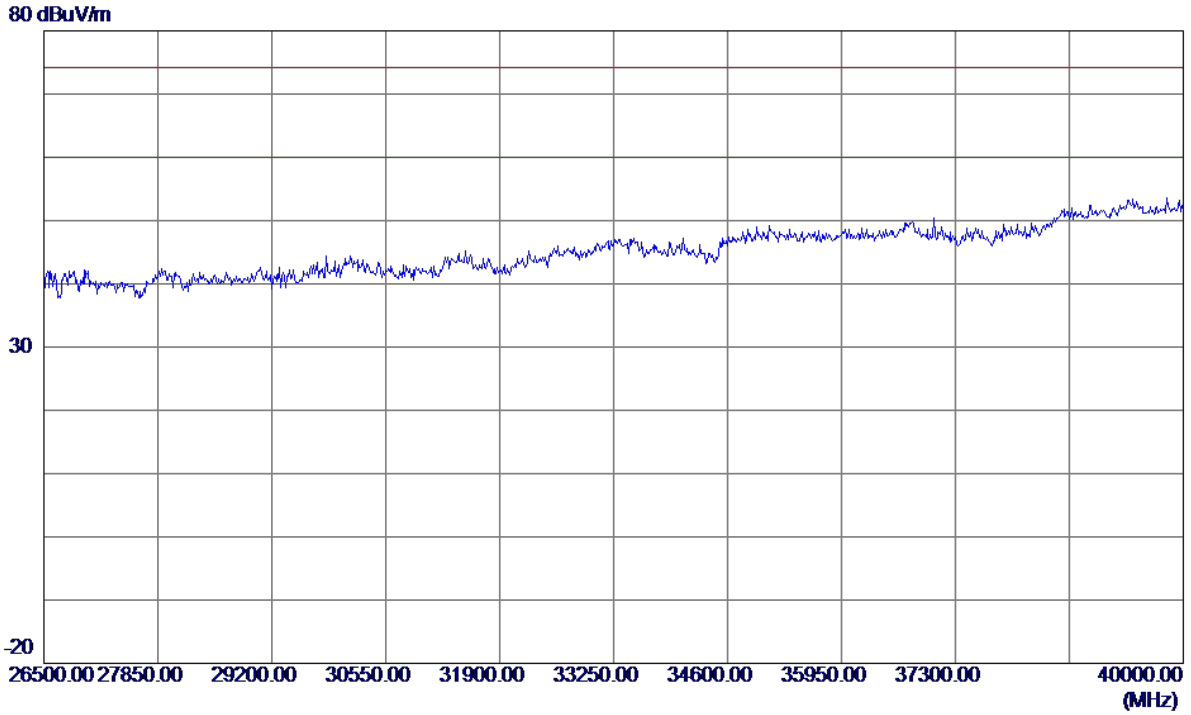

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

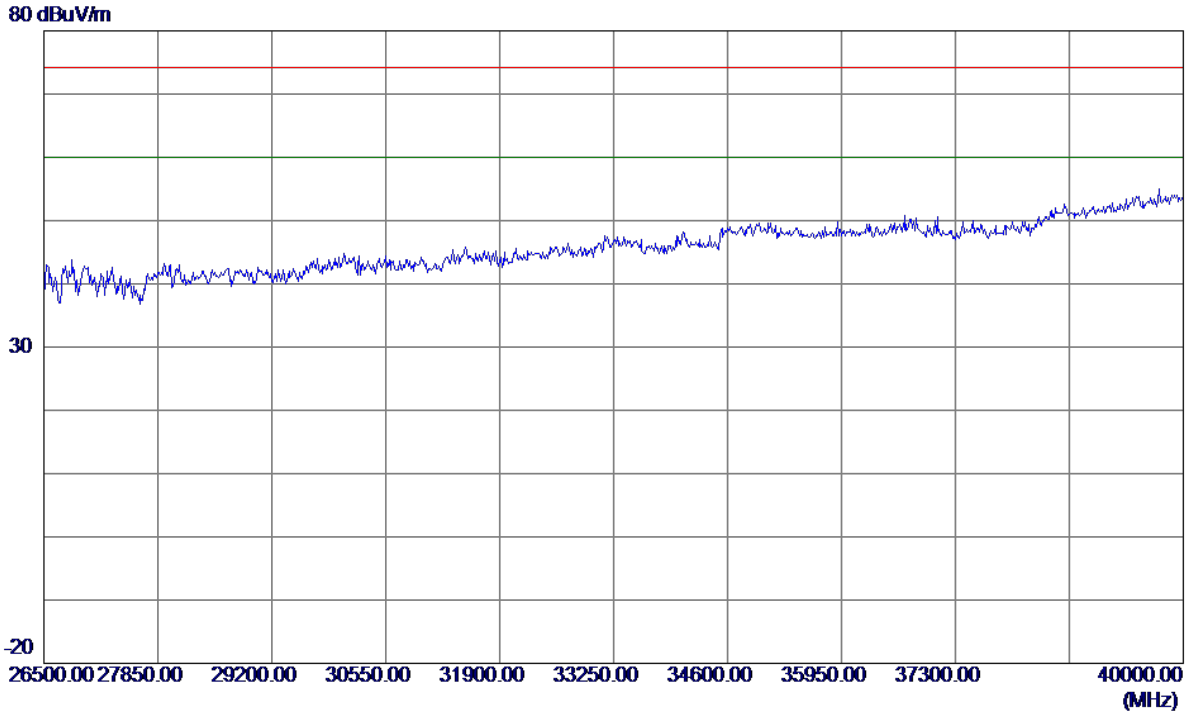

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

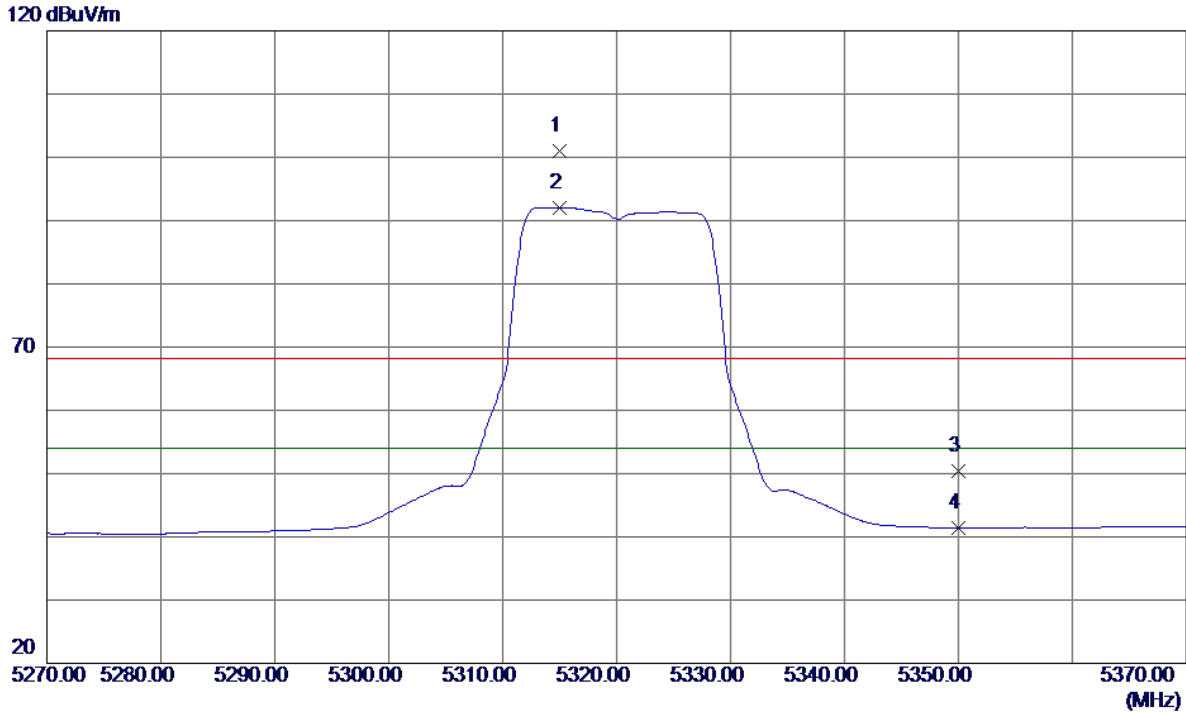


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5315.0000	59.84	41.20	101.04	68.30	32.74	Peak	No Limit
2 *	5315.0000	50.90	41.20	92.10	54.00	38.10	AVG	No Limit
3	5350.0000	9.03	41.38	50.41	68.30	-17.89	Peak	
4	5350.0000	-0.03	41.38	41.35	54.00	-12.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

115 dBuV/m

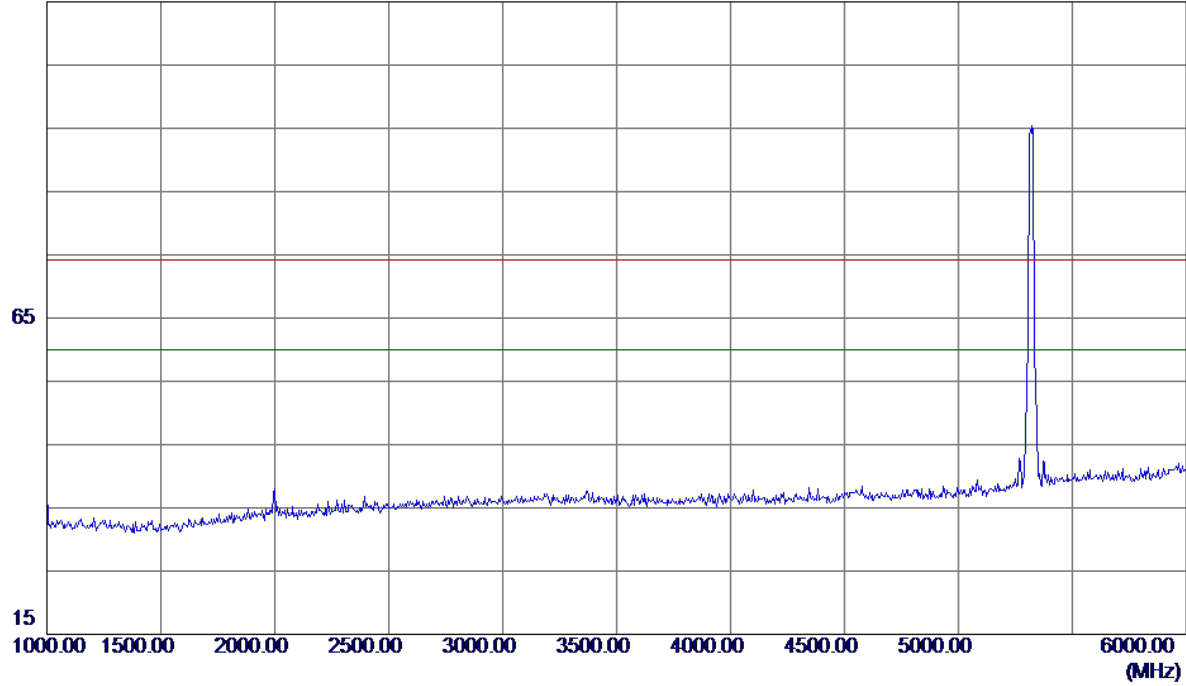


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

115 dBuV/m

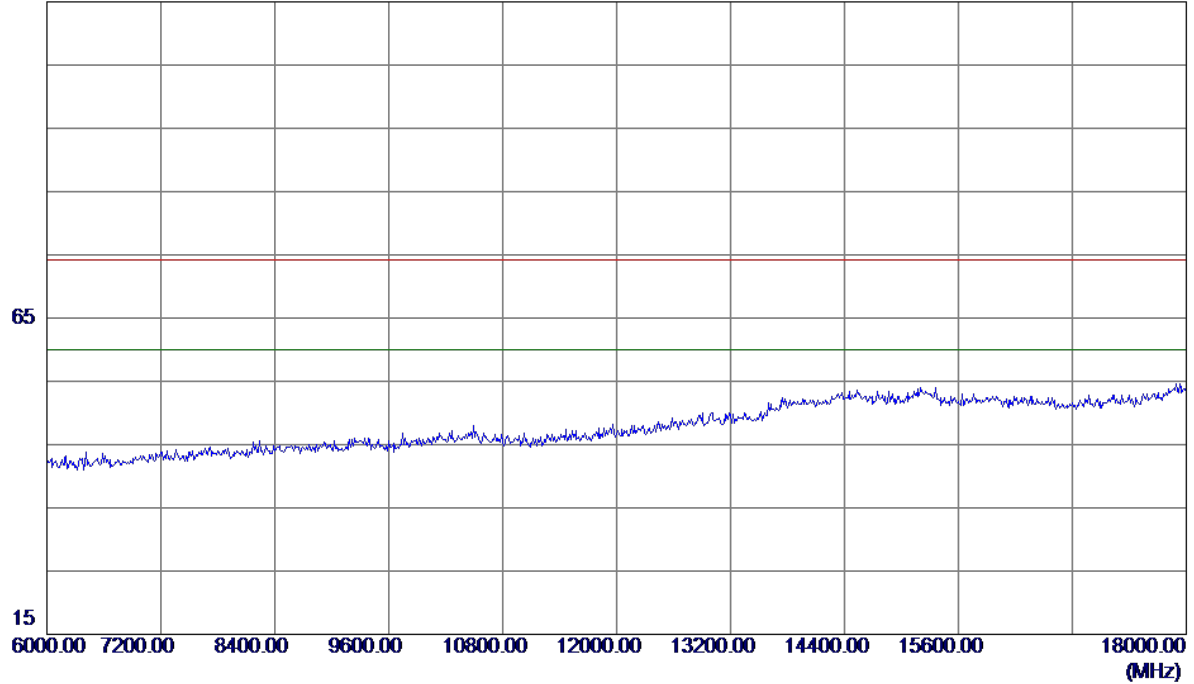


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal


115 dBuV/m

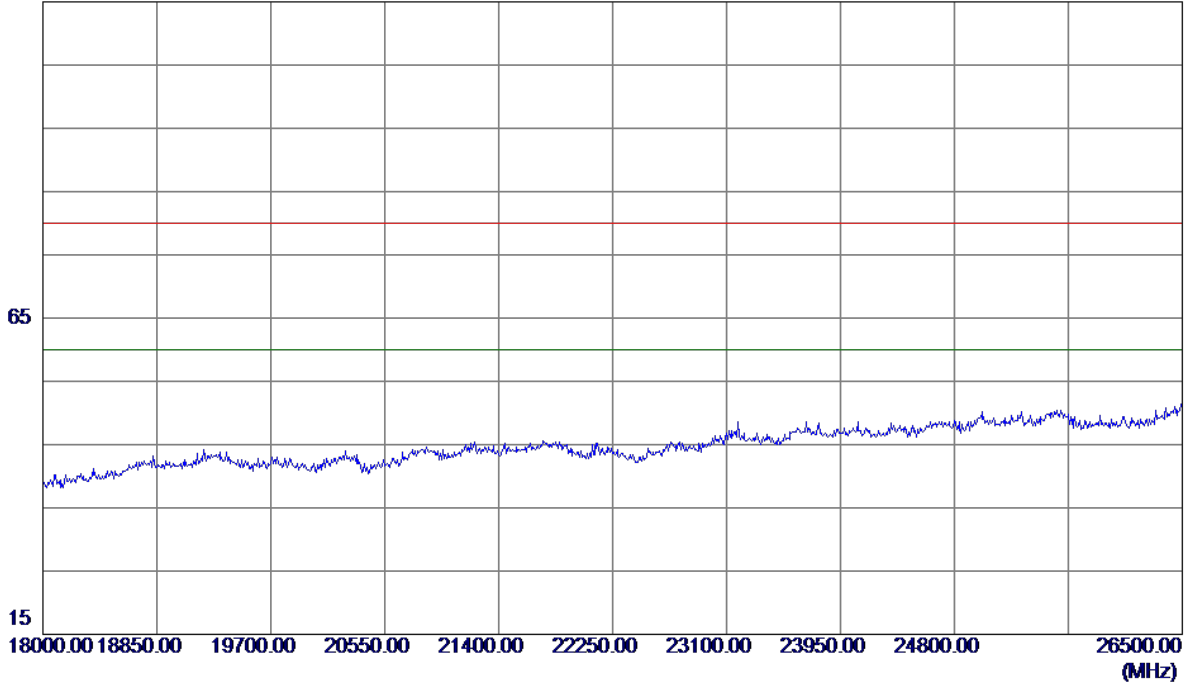

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

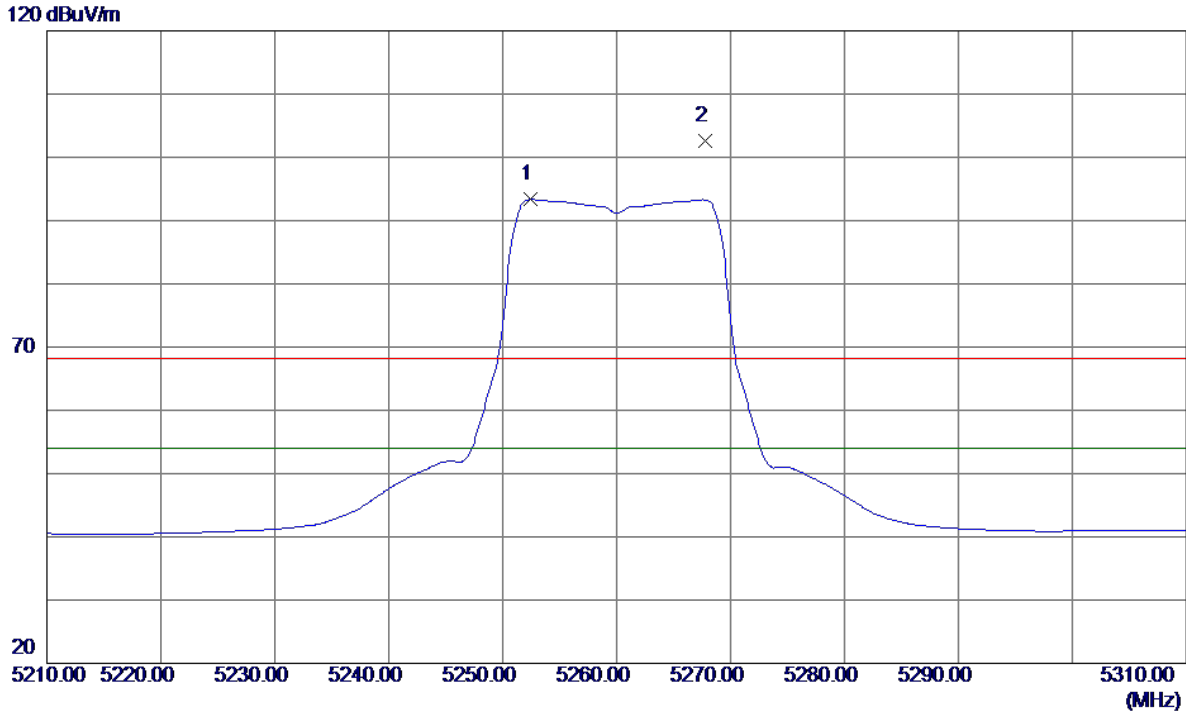


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5252.4000	52.46	40.87	93.33	54.00	39.33	AVG	No Limit
2	5267.8000	61.71	40.95	102.66	68.30	34.36	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

115 dBuV/m

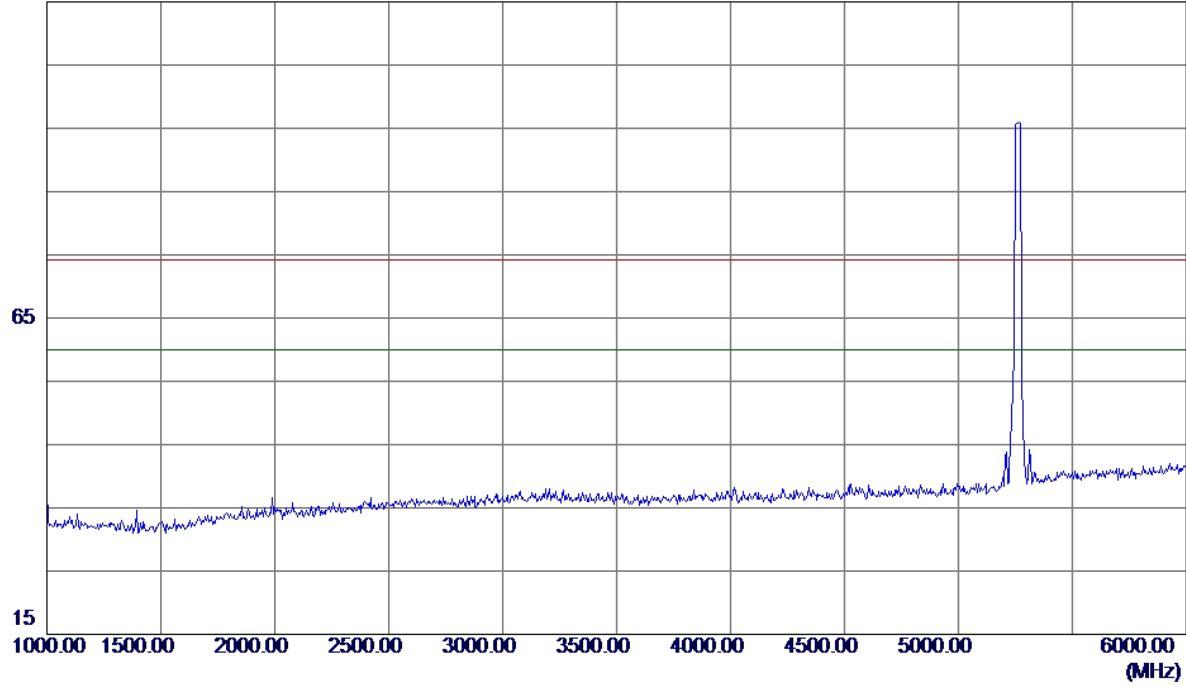


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

115 dBuV/m

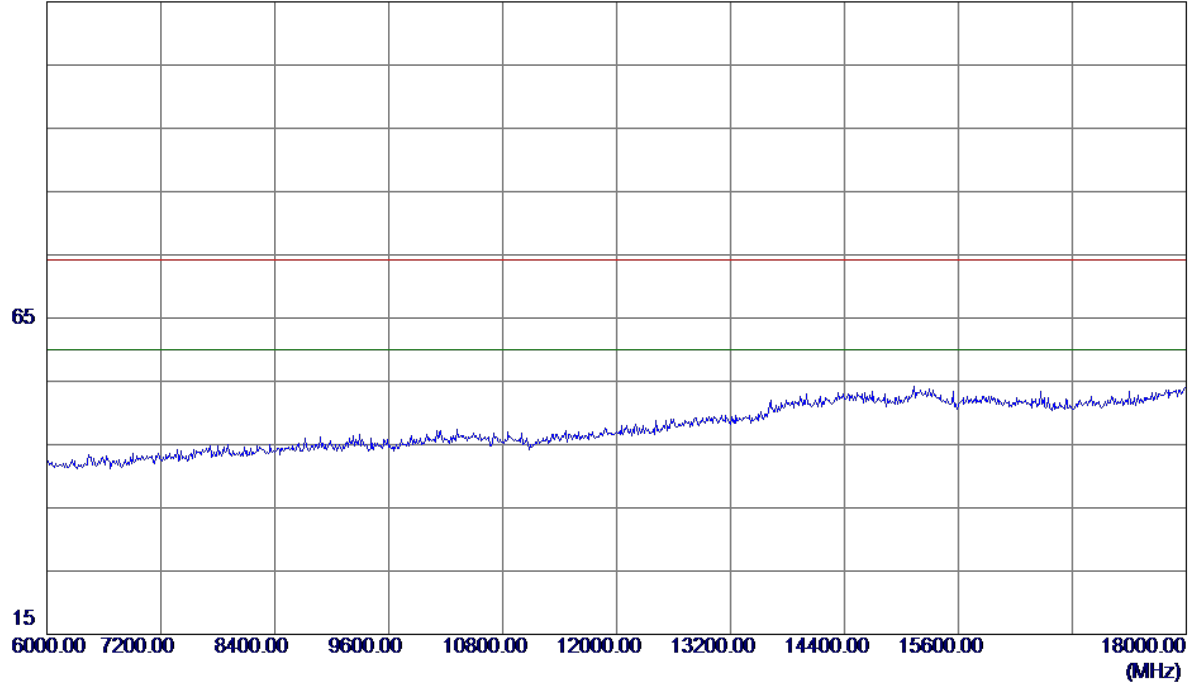


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

115 dBuV/m

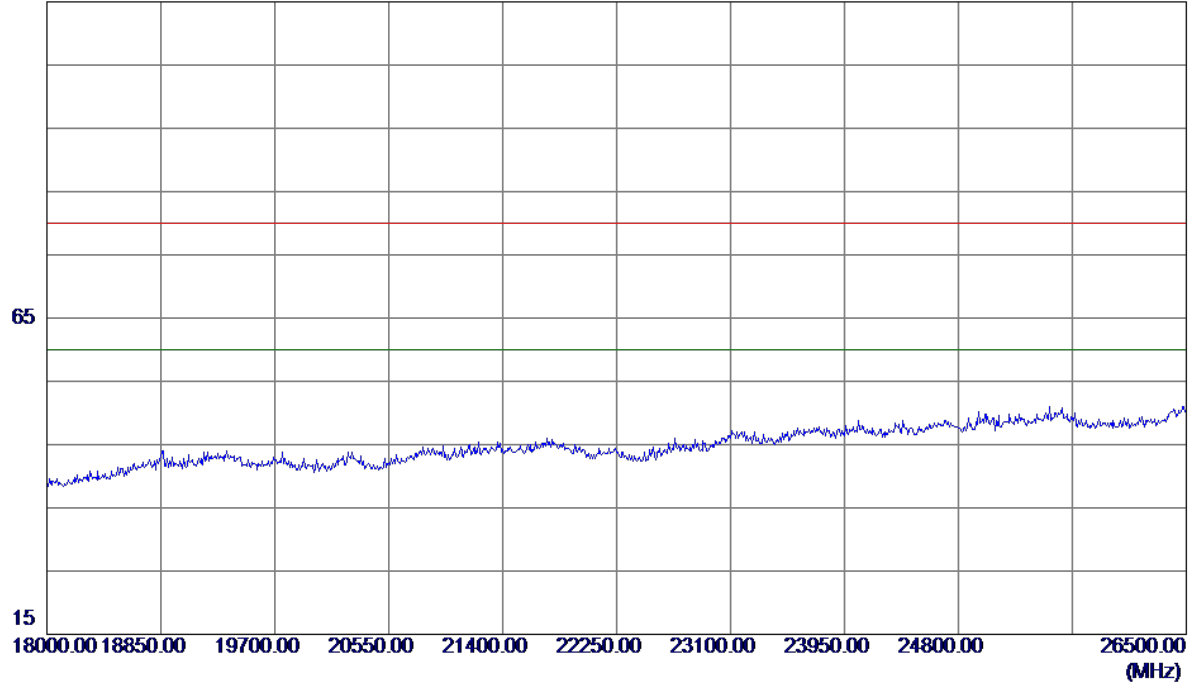

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

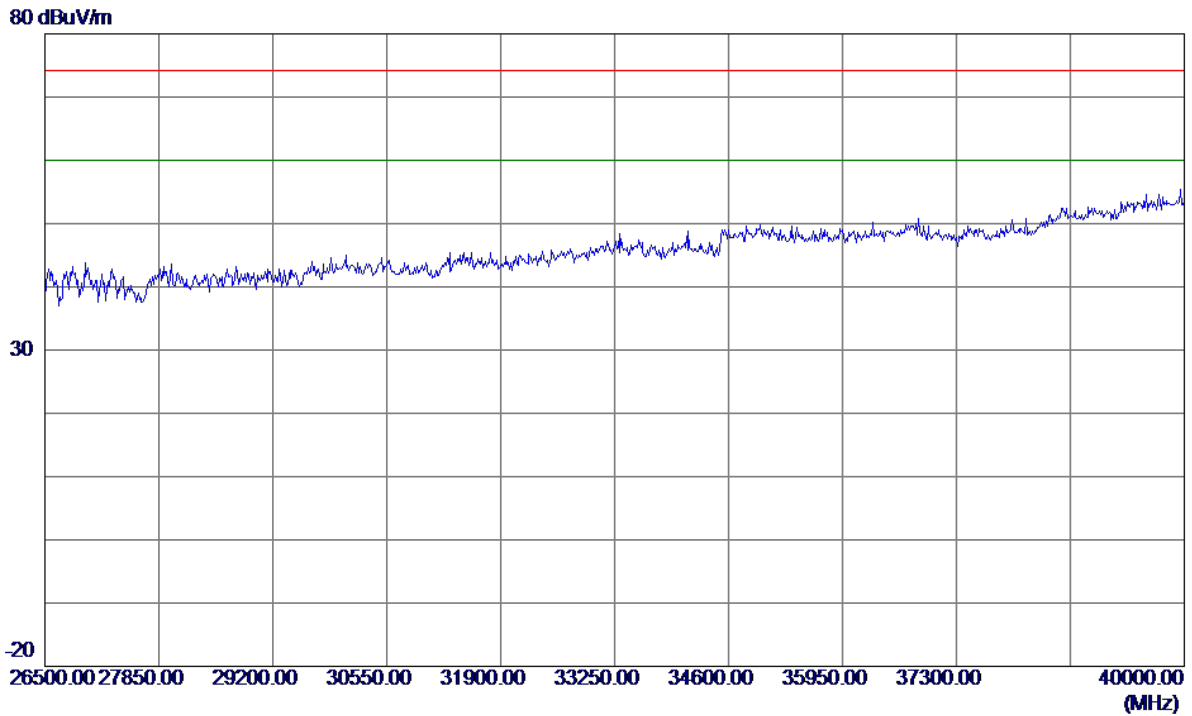Vertical

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

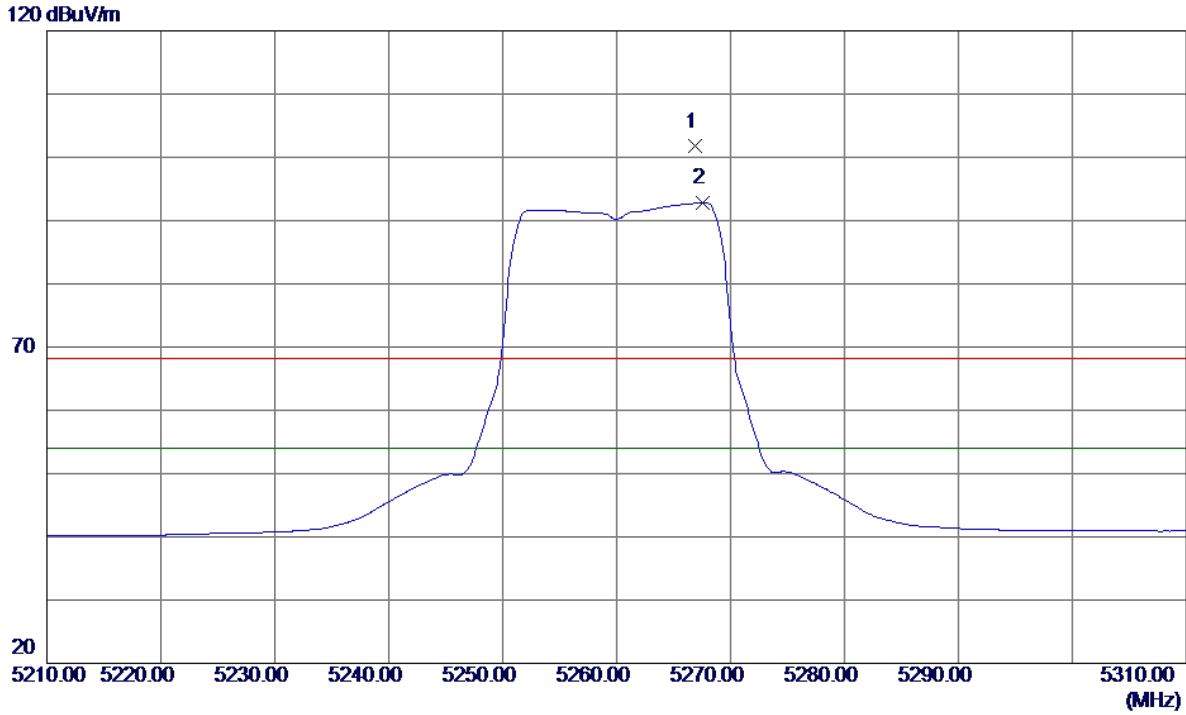


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5266.9000	60.76	40.94	101.70	68.30	33.40	Peak	No Limit
2 *	5267.6000	51.90	40.95	92.85	54.00	38.85	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

115 dBuV/m

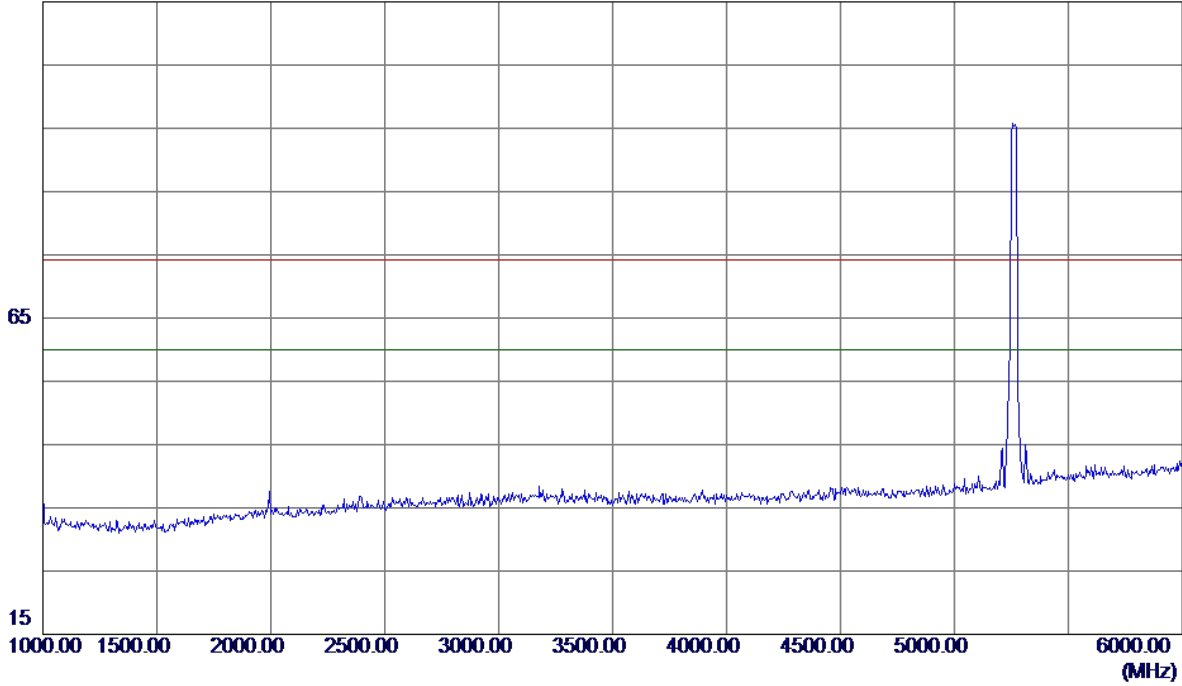


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

115 dBuV/m

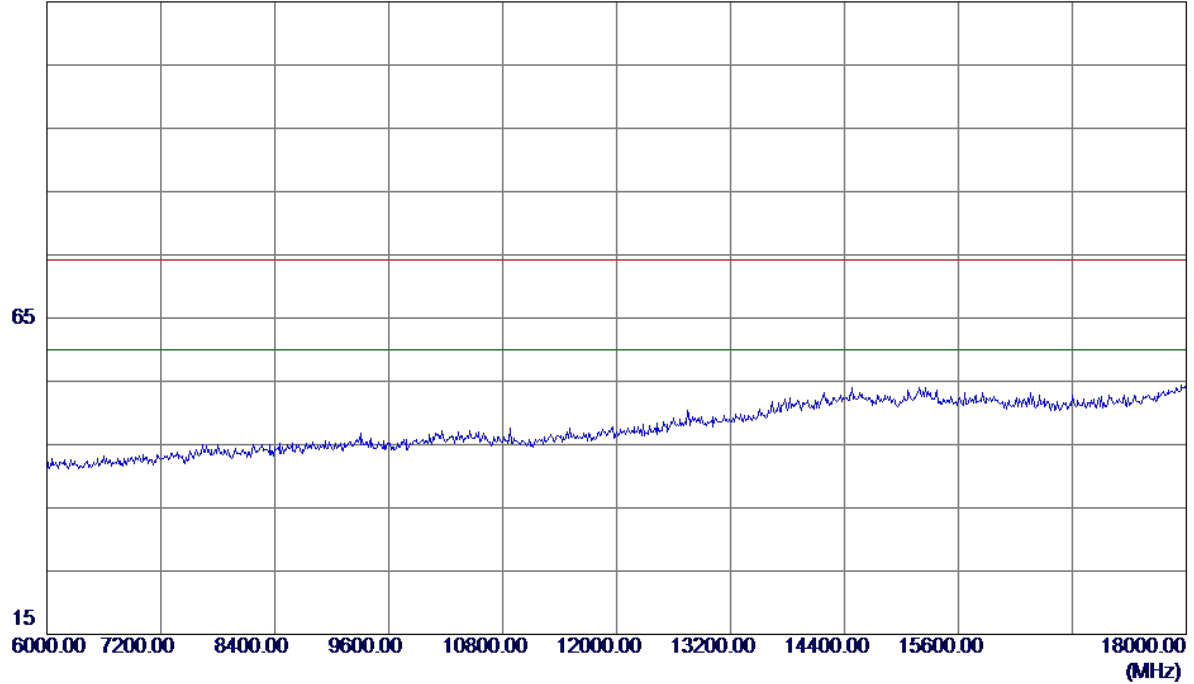


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal


115 dBuV/m

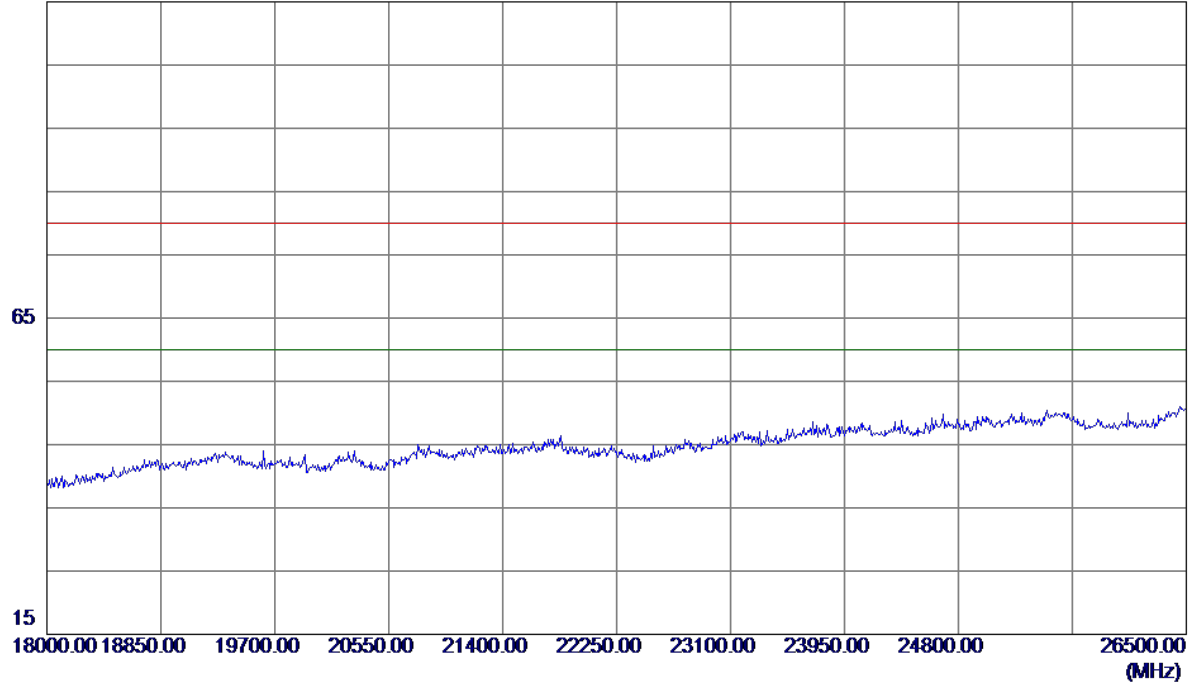

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

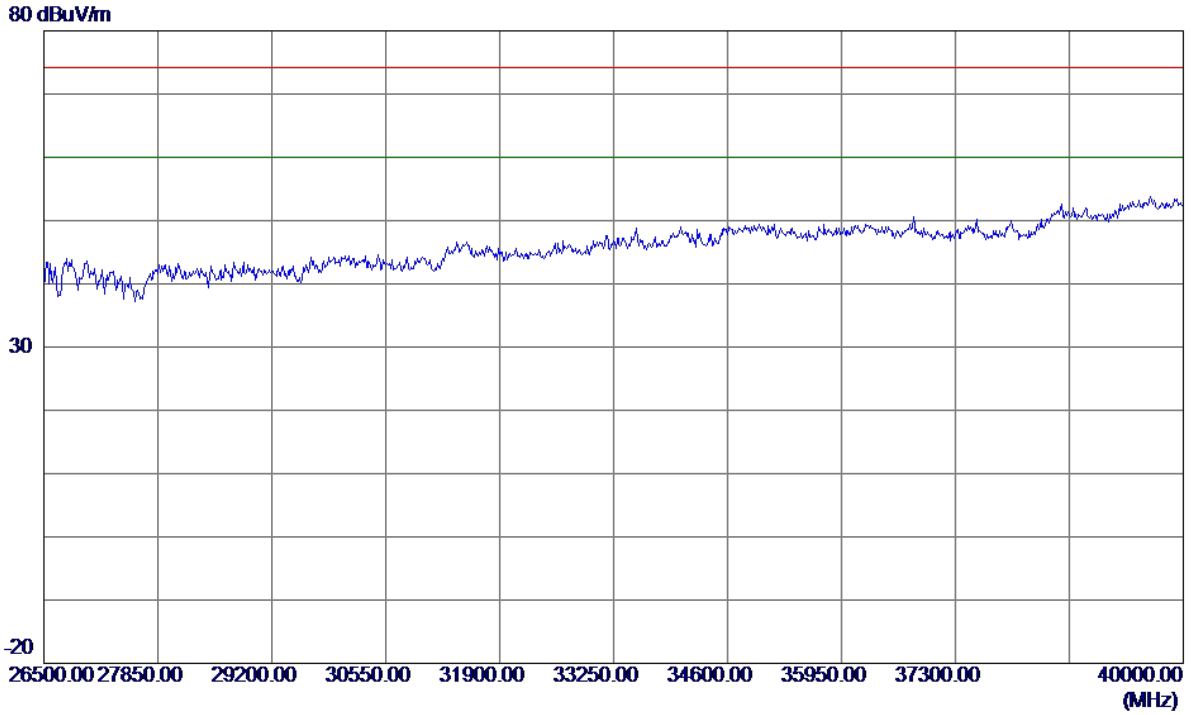

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

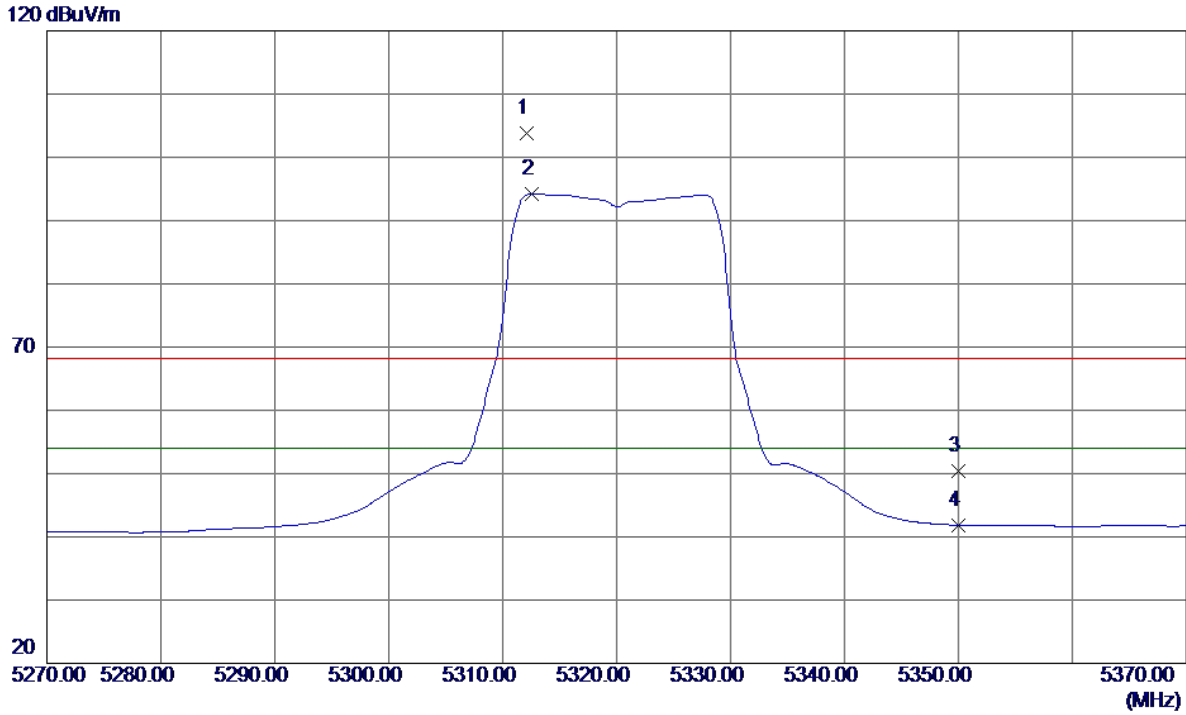


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5312.1000	62.59	41.18	103.77	68.30	35.47	Peak	No Limit
2 *	5312.6000	53.01	41.19	94.20	54.00	40.20	AVG	No Limit
3	5350.0000	9.06	41.38	50.44	68.30	-17.86	Peak	
4	5350.0000	0.43	41.38	41.81	54.00	-12.19	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

115 dBuV/m

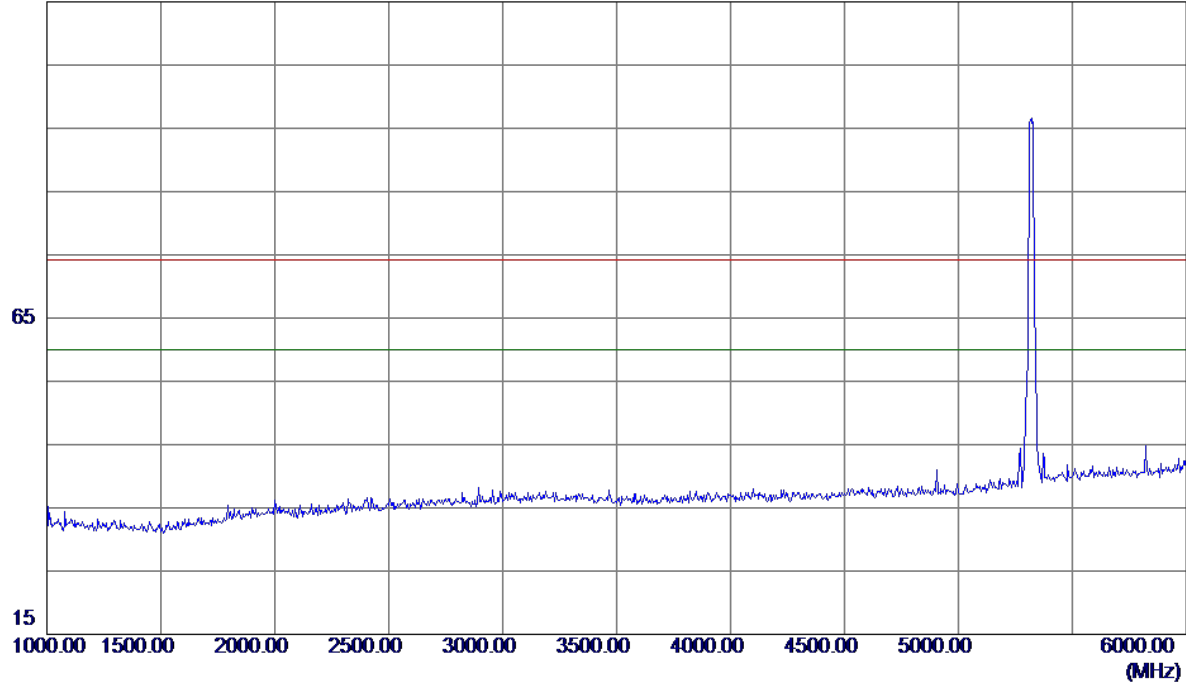


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

115 dBuV/m

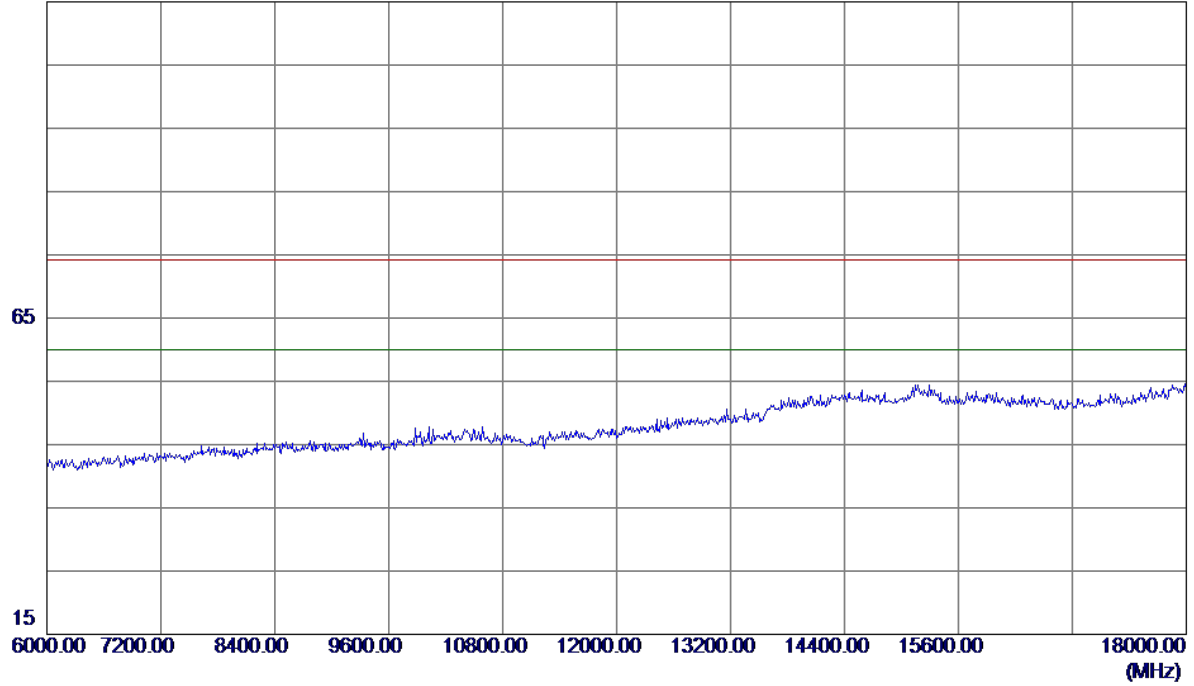


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical


115 dBuV/m

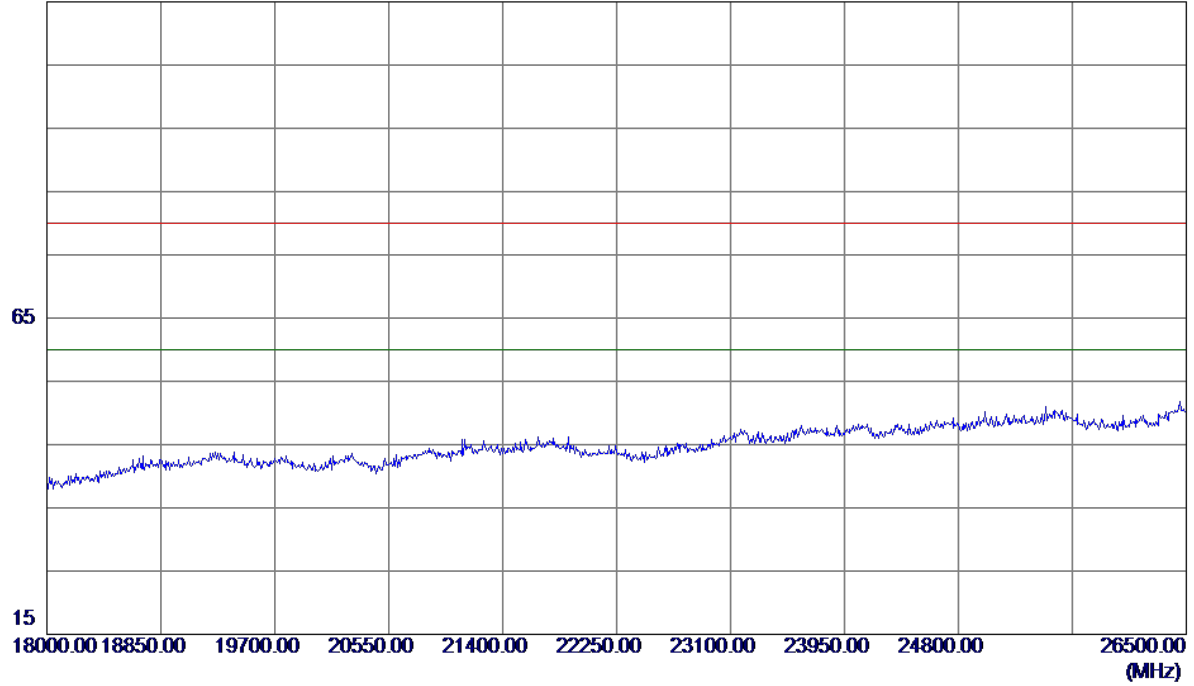

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

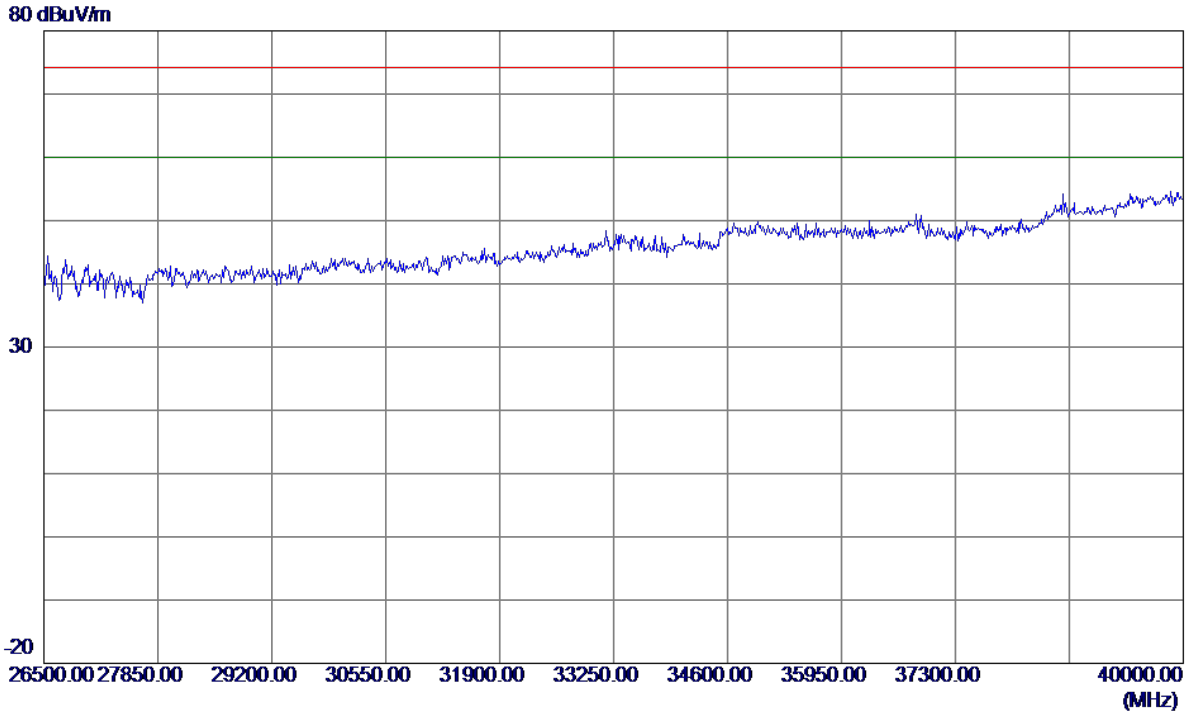

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

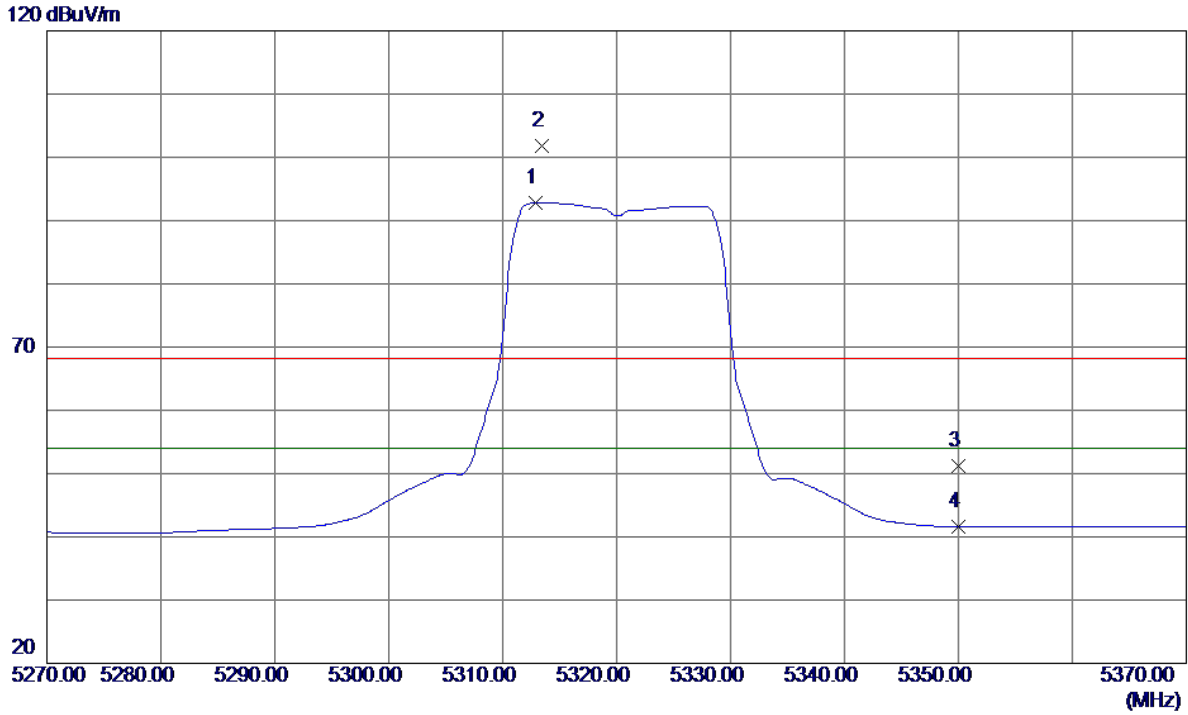


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5312.9000	51.56	41.19	92.75	54.00	38.75	AVG	No Limit
2	5313.4000	60.67	41.19	101.86	68.30	33.56	Peak	No Limit
3	5350.0000	9.91	41.38	51.29	68.30	-17.01	Peak	
4	5350.0000	0.15	41.38	41.53	54.00	-12.47	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

115 dBuV/m

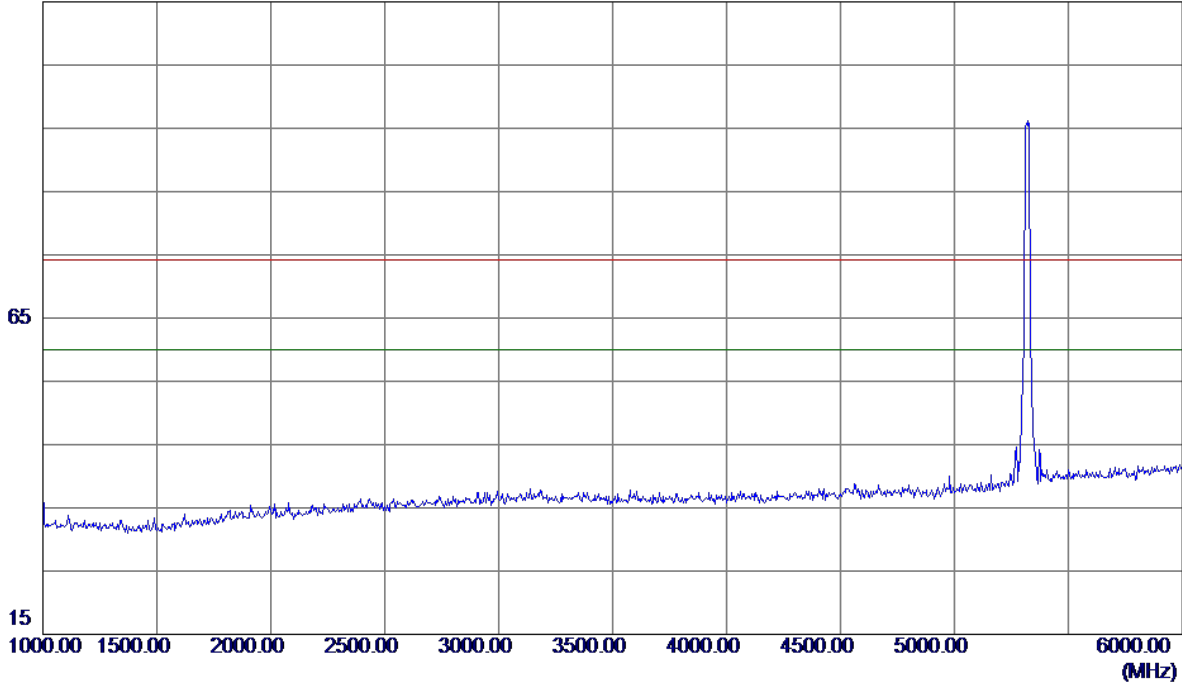


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

115 dBuV/m

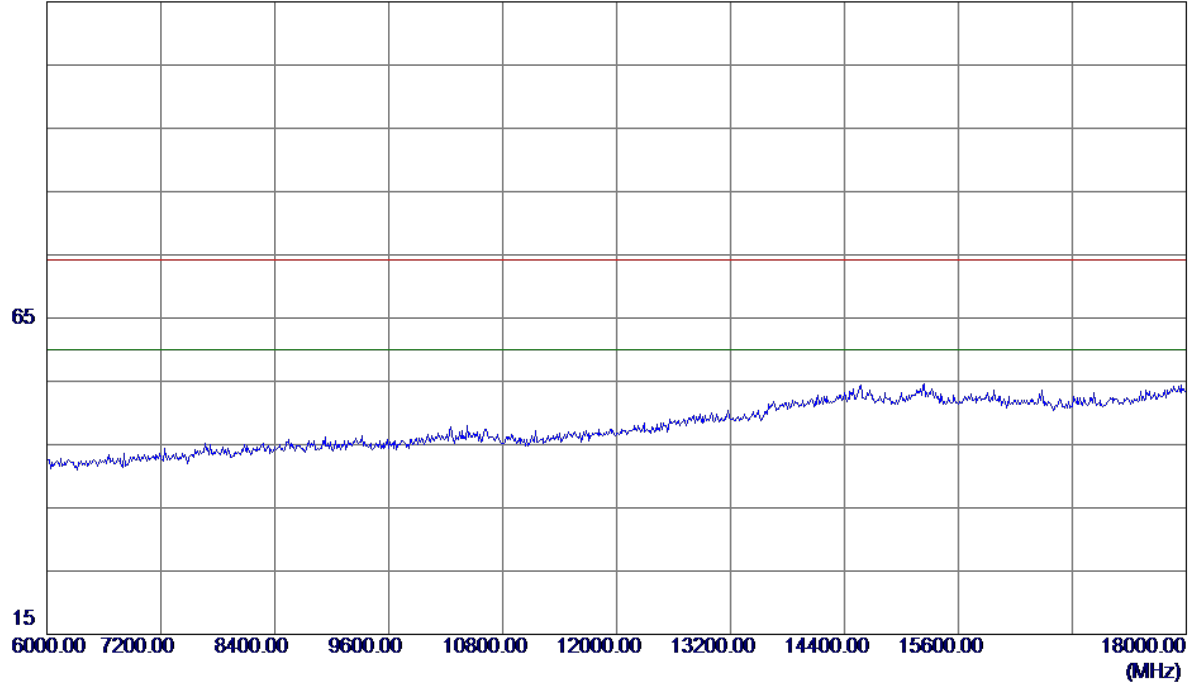


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal


115 dBuV/m

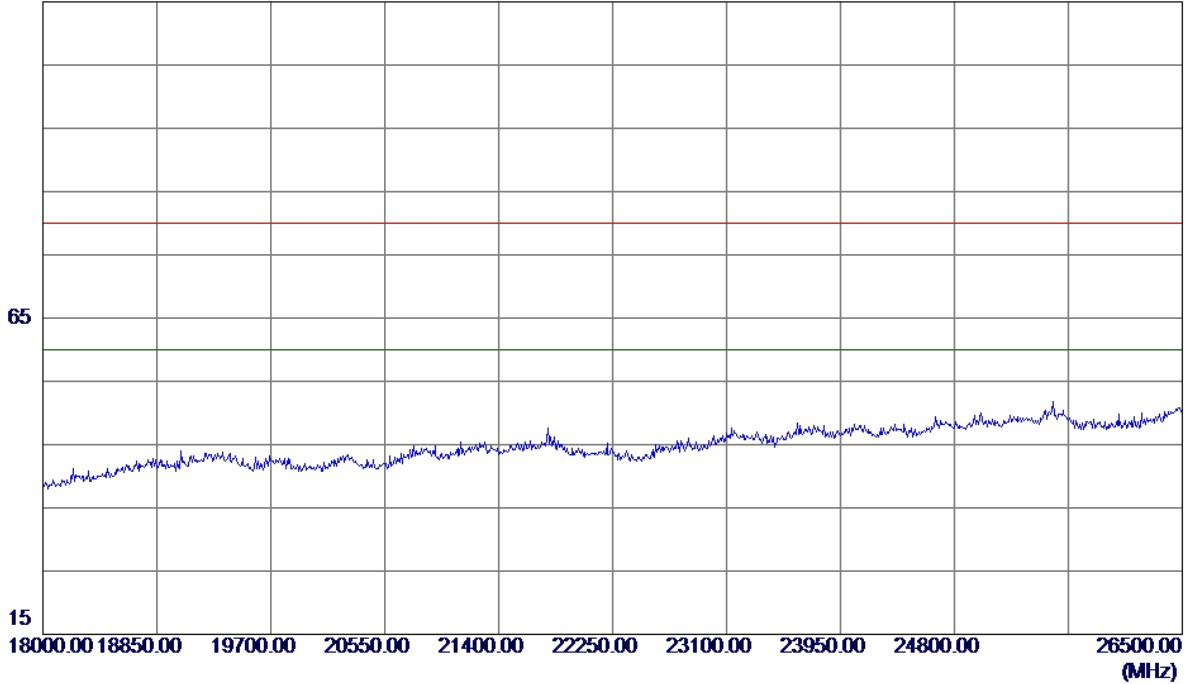

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

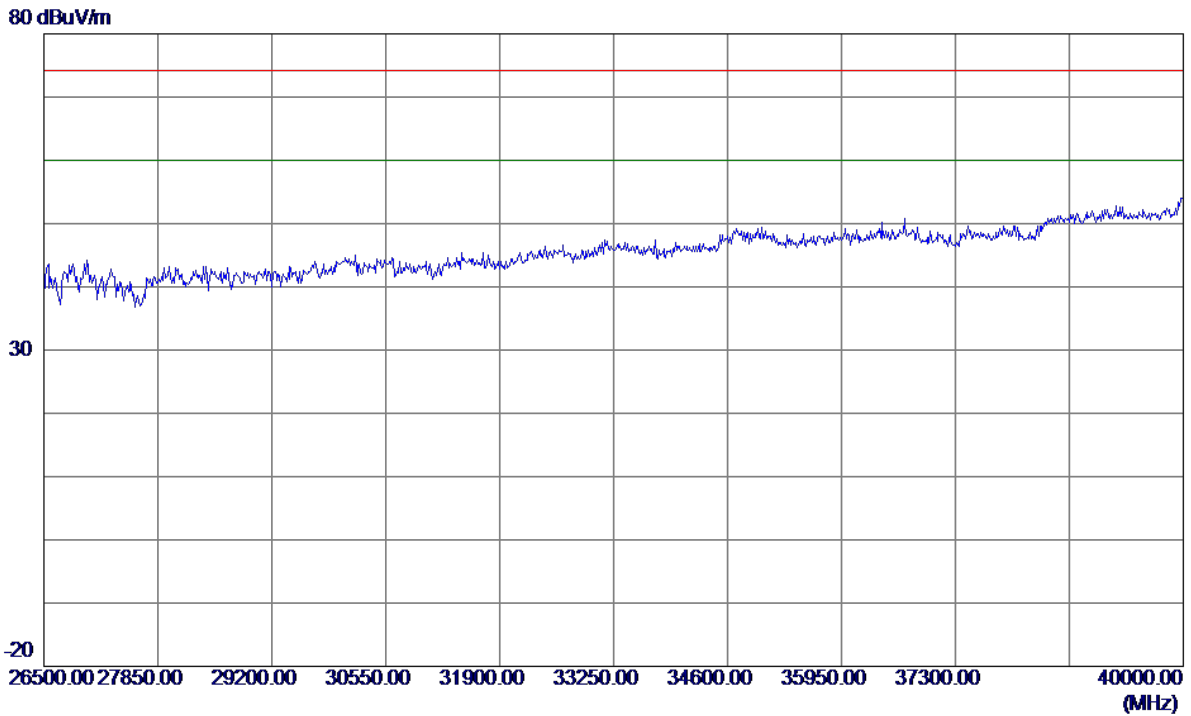

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

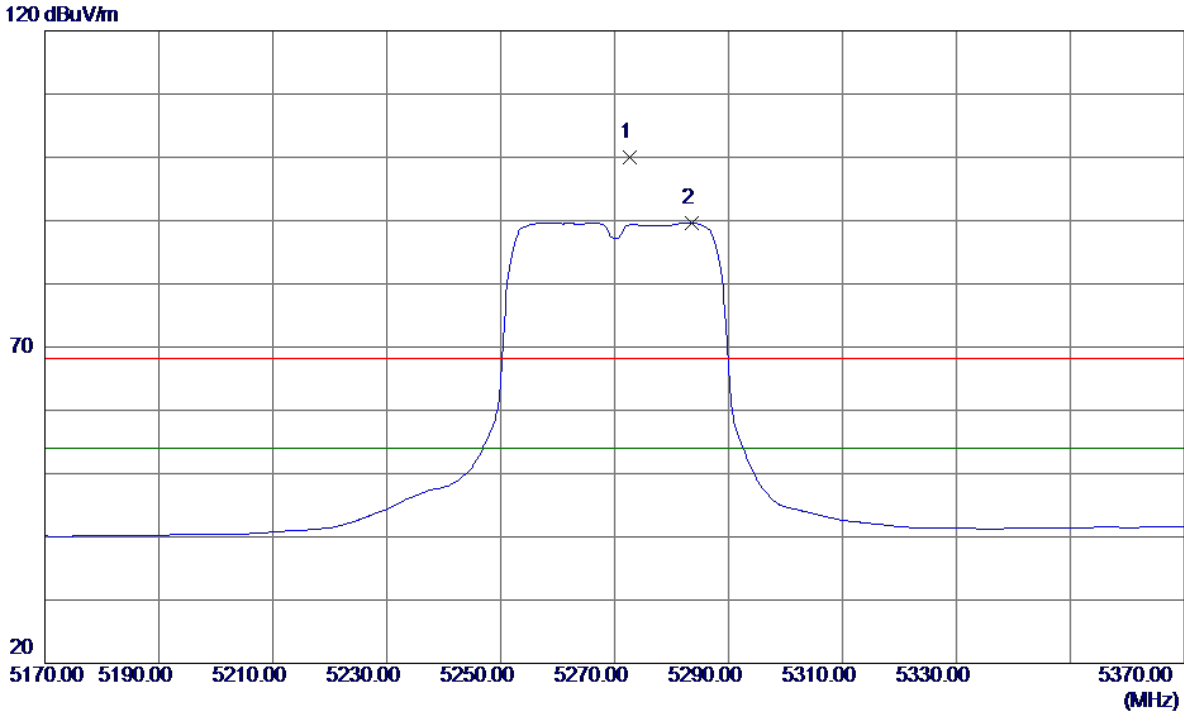


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5272.6000	58.93	40.97	99.90	68.30	31.60	Peak	No Limit
2 *	5283.6000	48.63	41.03	89.66	54.00	35.66	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

115 dBuV/m

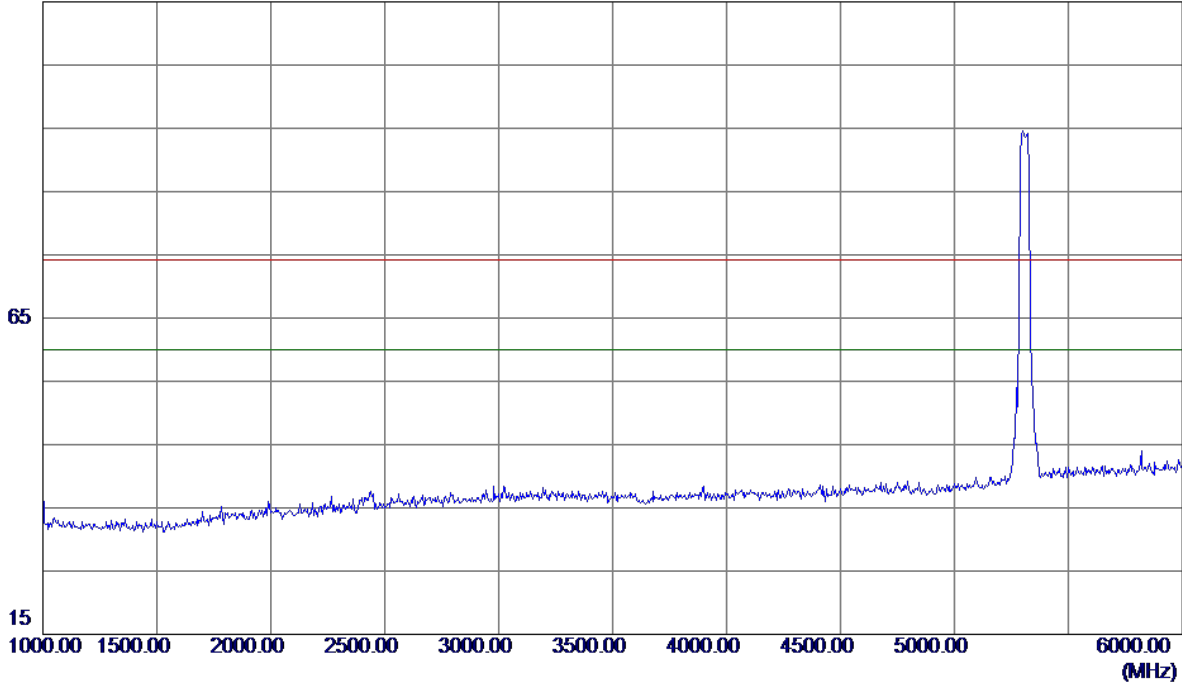


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

115 dBuV/m

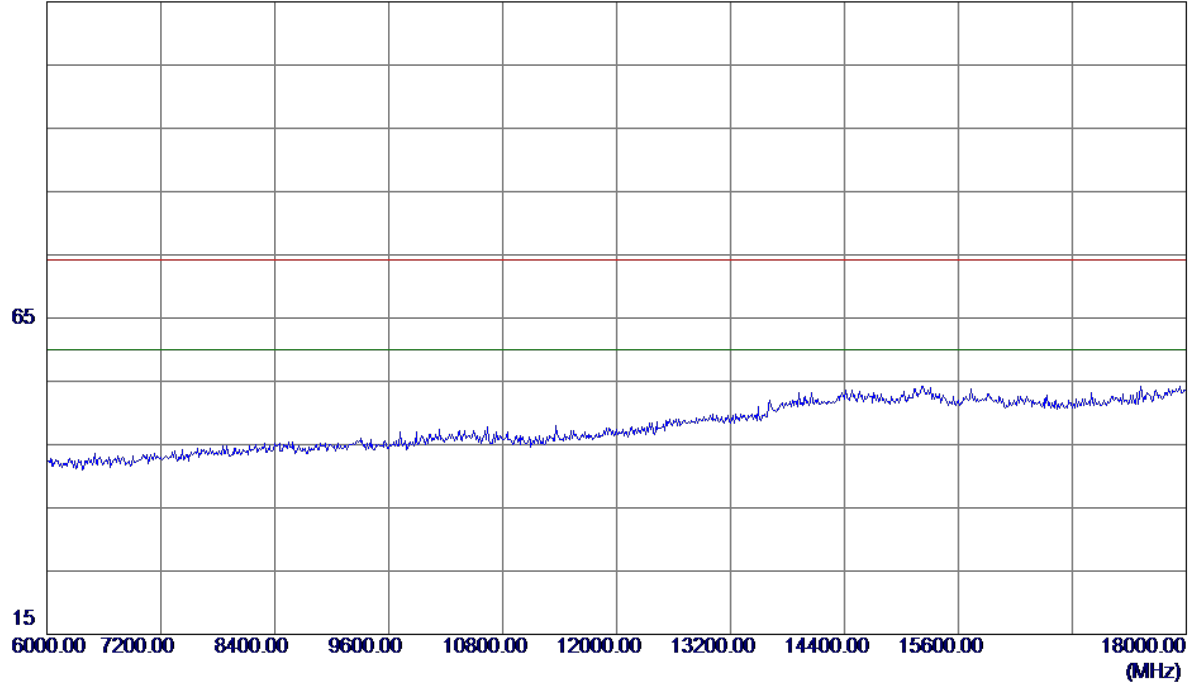


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical


115 dBuV/m

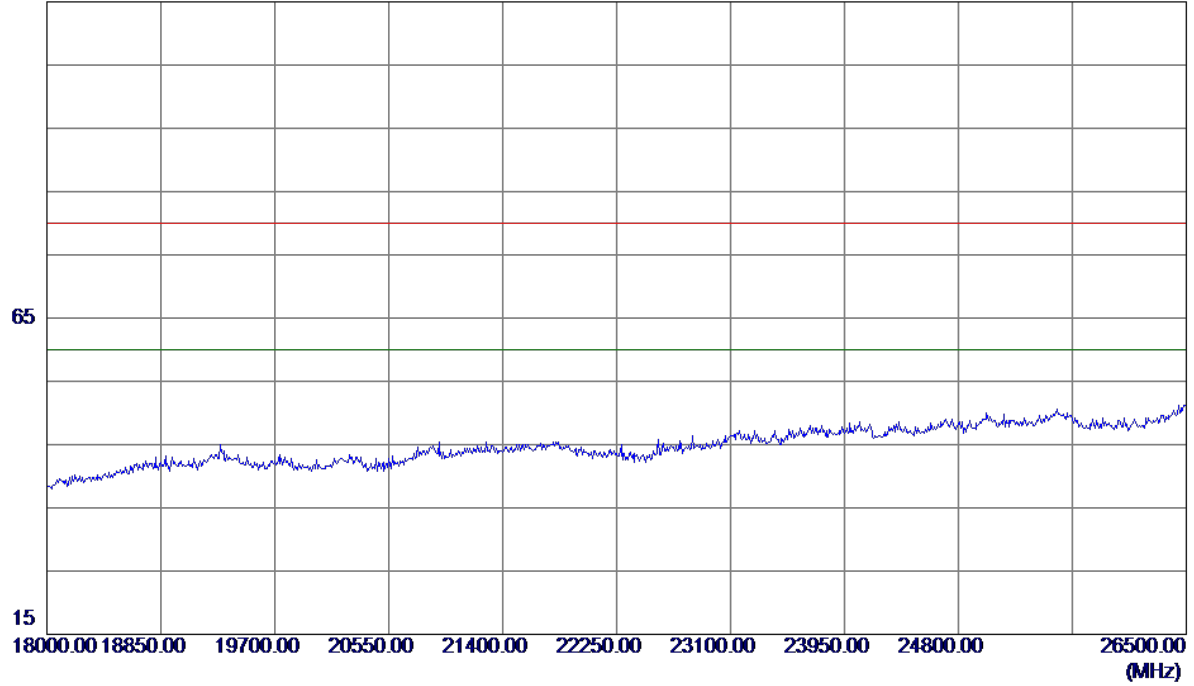

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

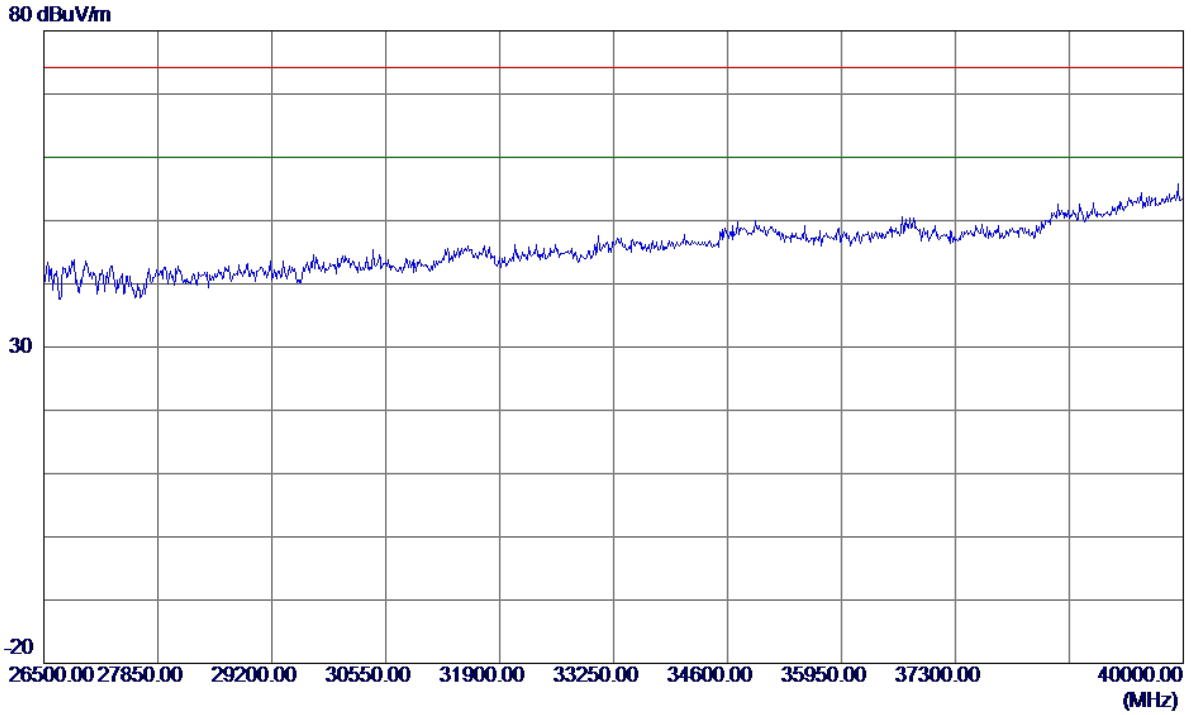

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

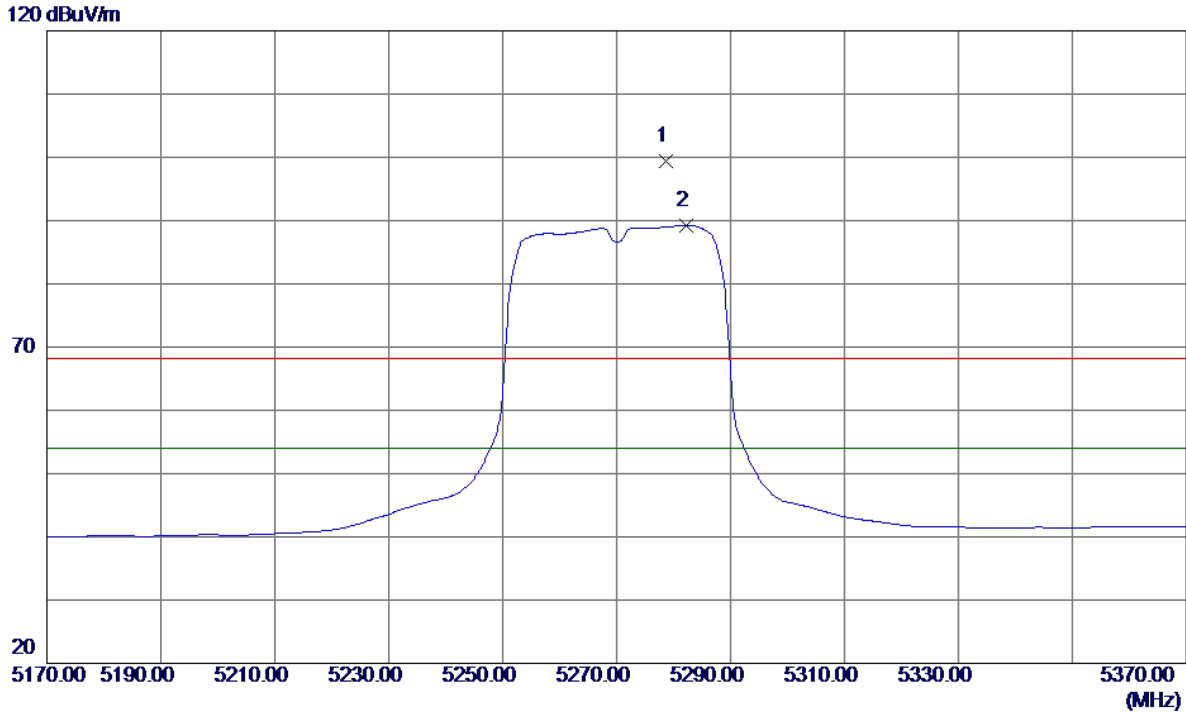


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5278.6000	58.44	41.01	99.45	68.30	31.15	Peak	No Limit
2 *	5282.2000	48.25	41.03	89.28	54.00	35.28	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

115 dBuV/m

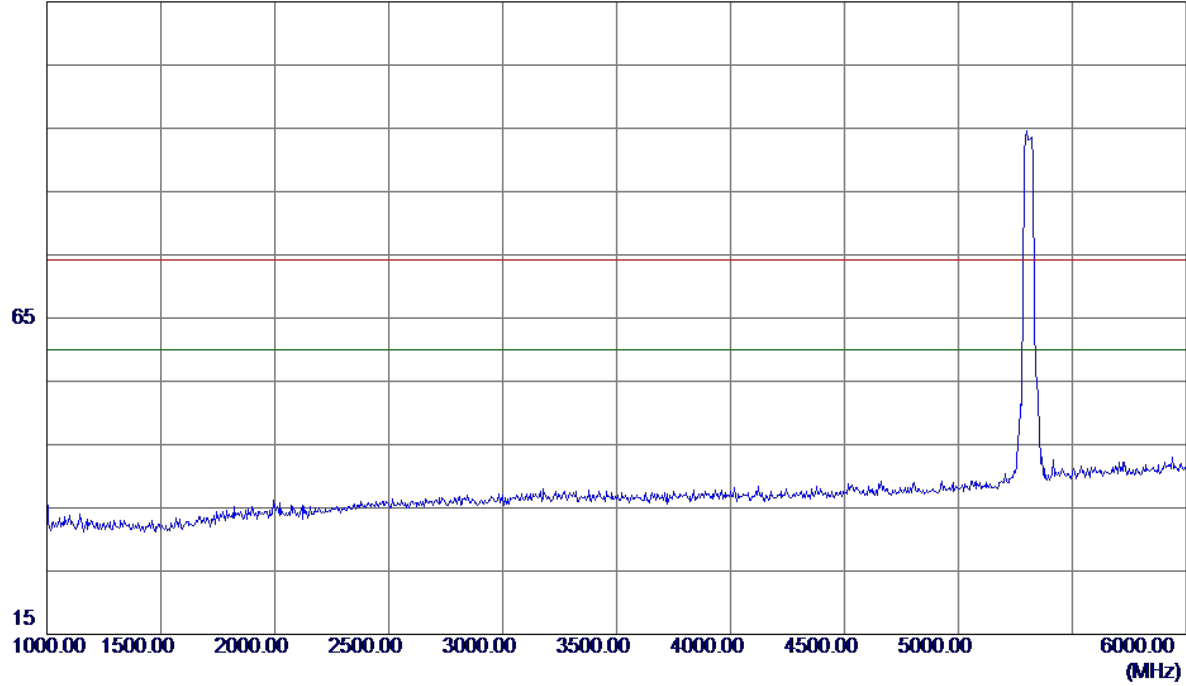


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

115 dBuV/m

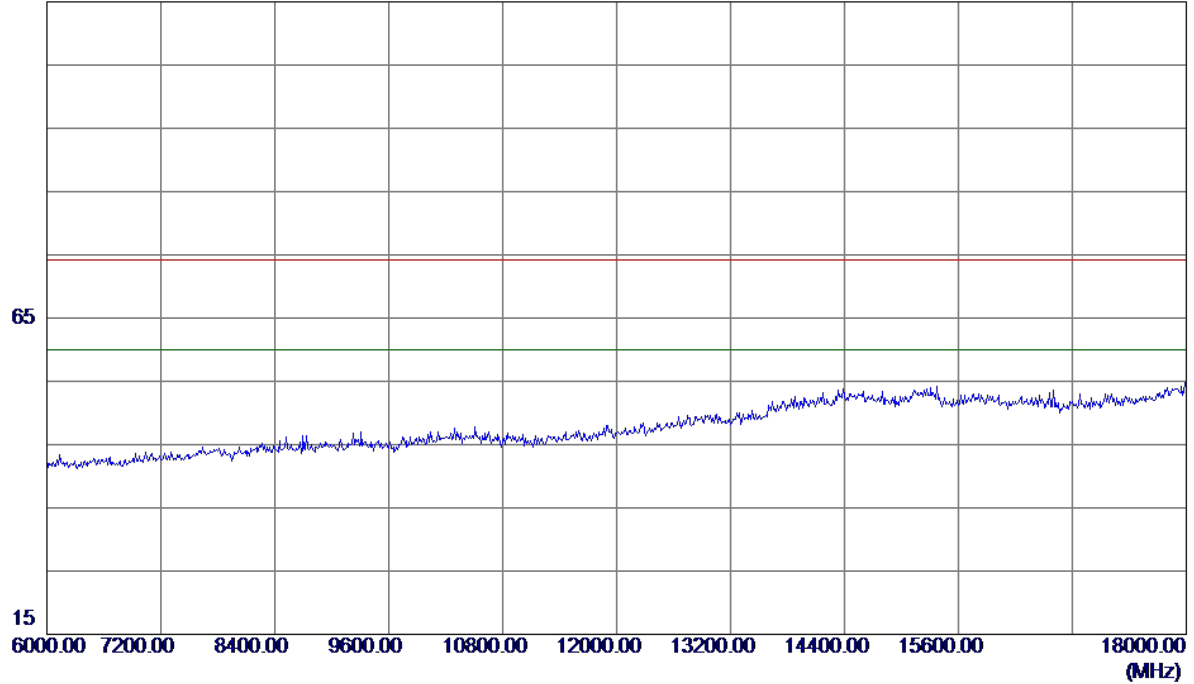


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal


115 dBuV/m

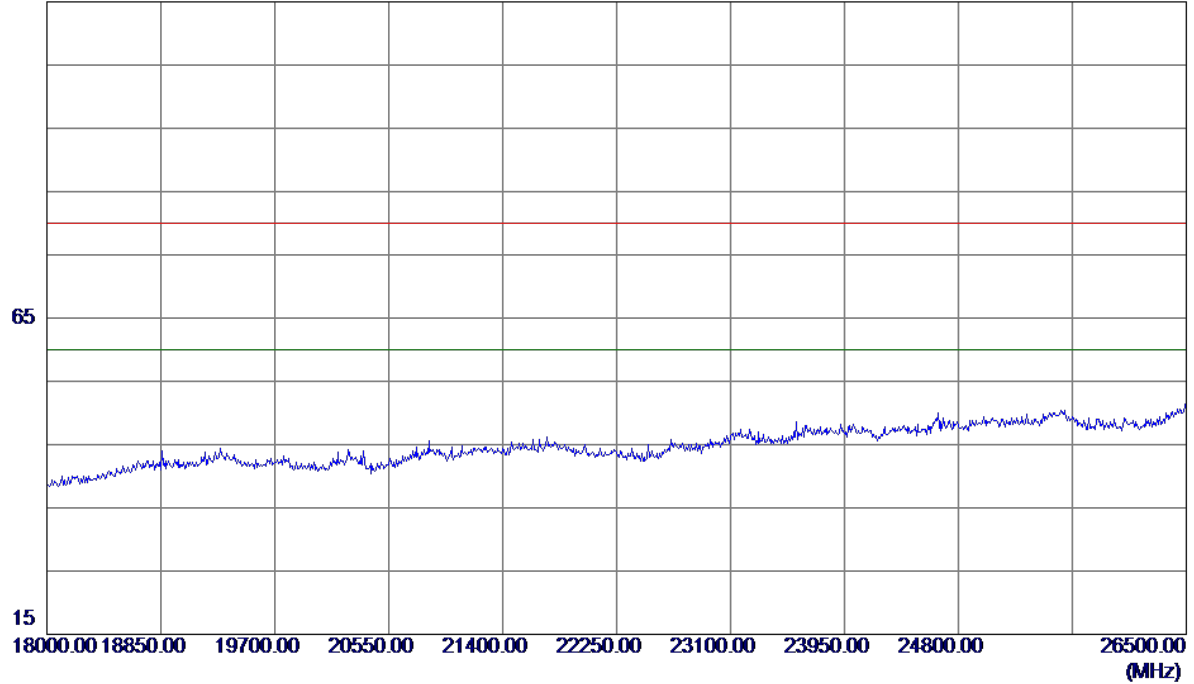

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

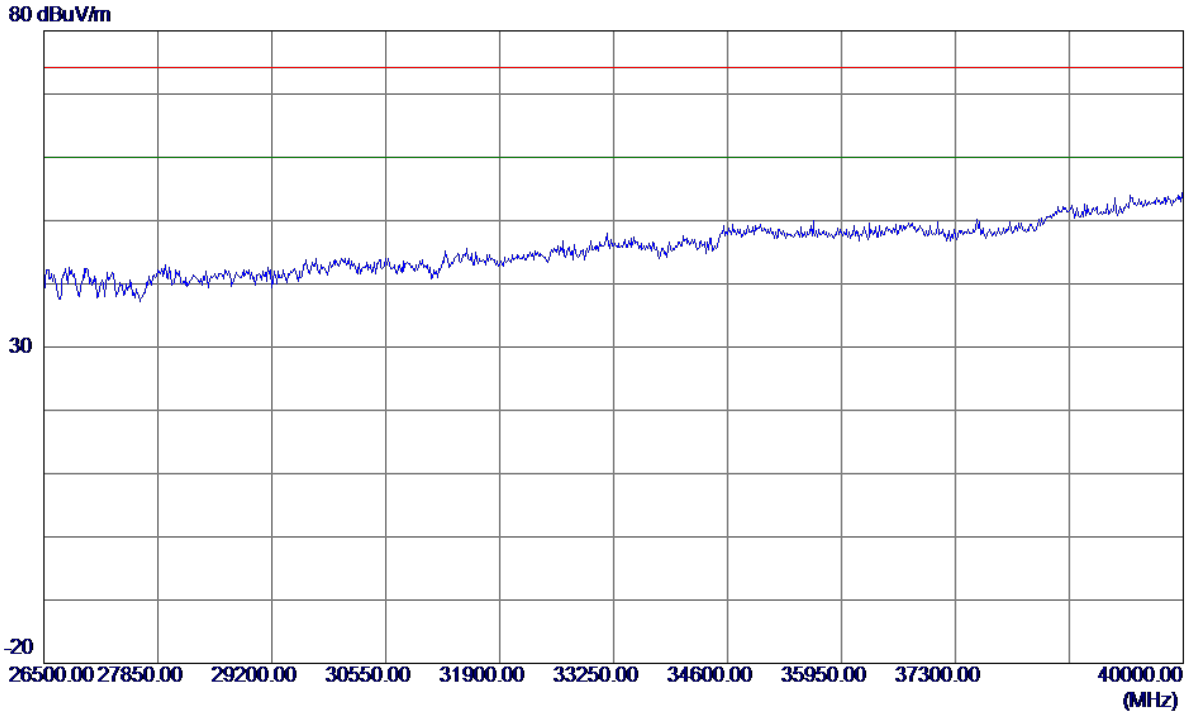


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

120 dBuV/m

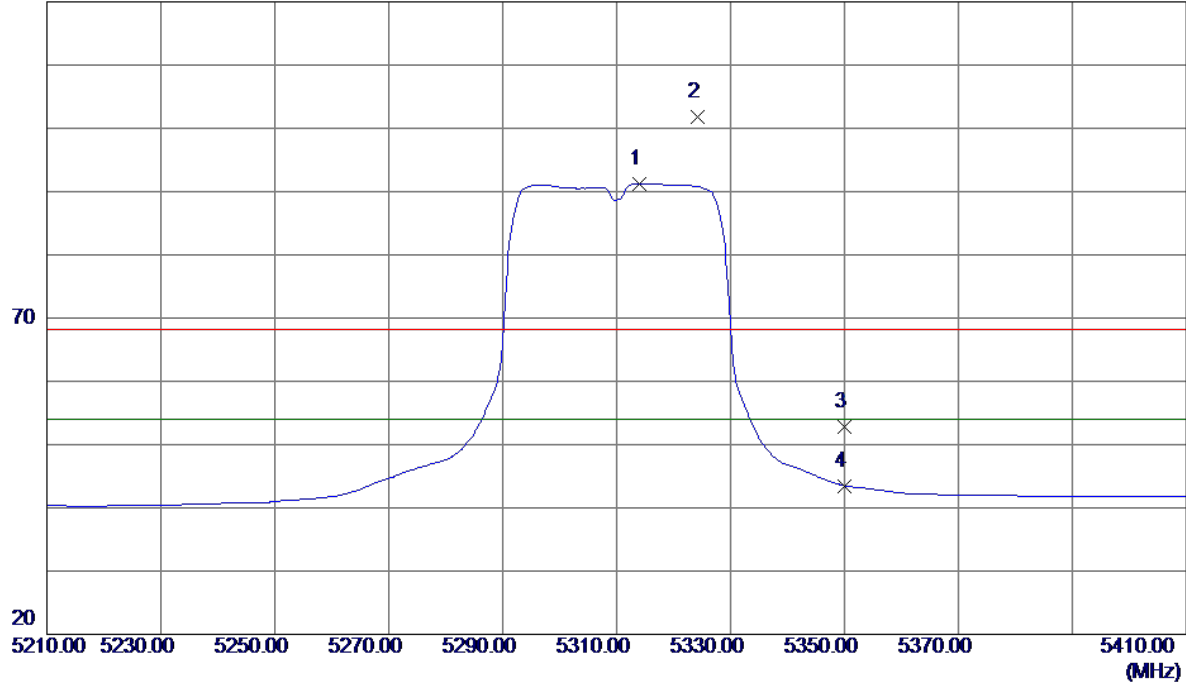


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5314.0000	50.04	41.19	91.23	54.00	37.23	AVG	No Limit
2	5324.2000	60.60	41.25	101.85	68.30	33.55	Peak	No Limit
3	5350.0000	11.44	41.38	52.82	68.30	-15.48	Peak	
4	5350.0000	2.11	41.38	43.49	54.00	-10.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

115 dBuV/m

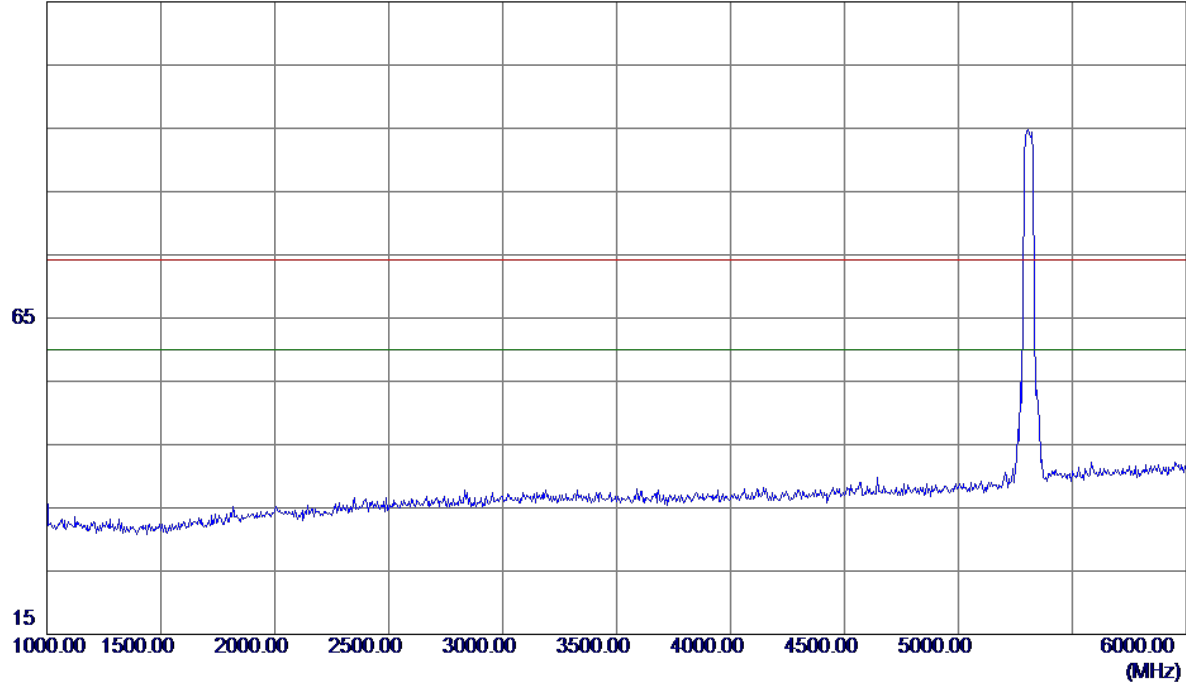


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

115 dBuV/m

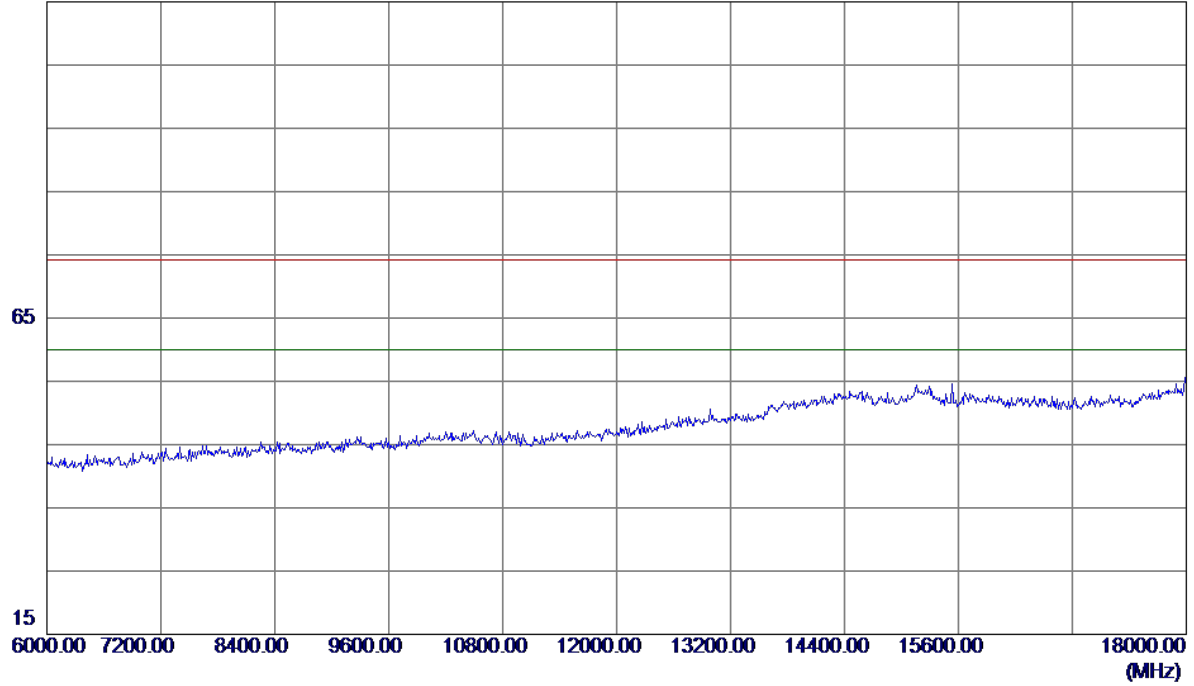


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical


115 dBuV/m

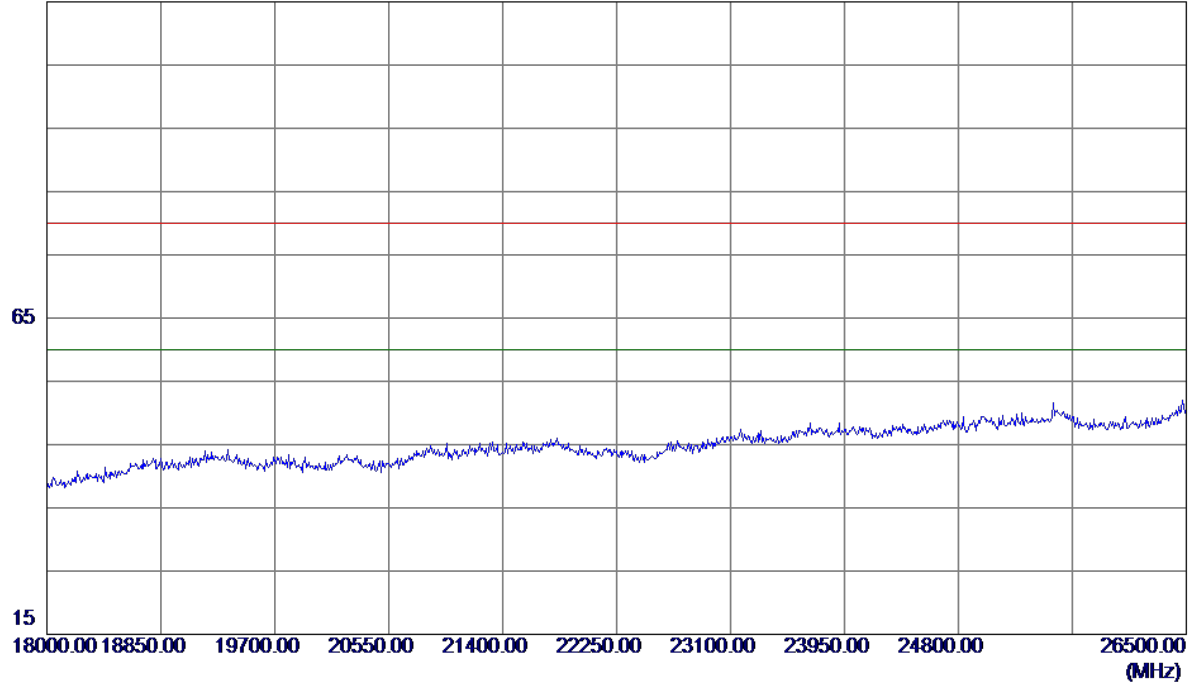

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

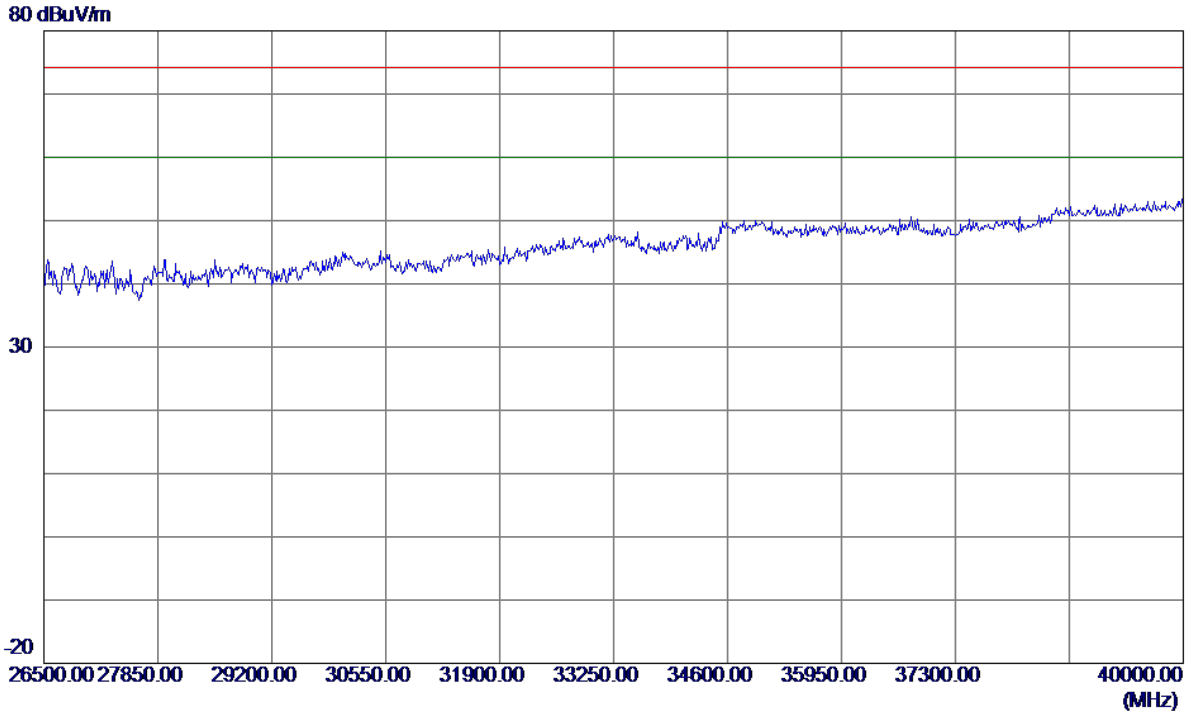

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

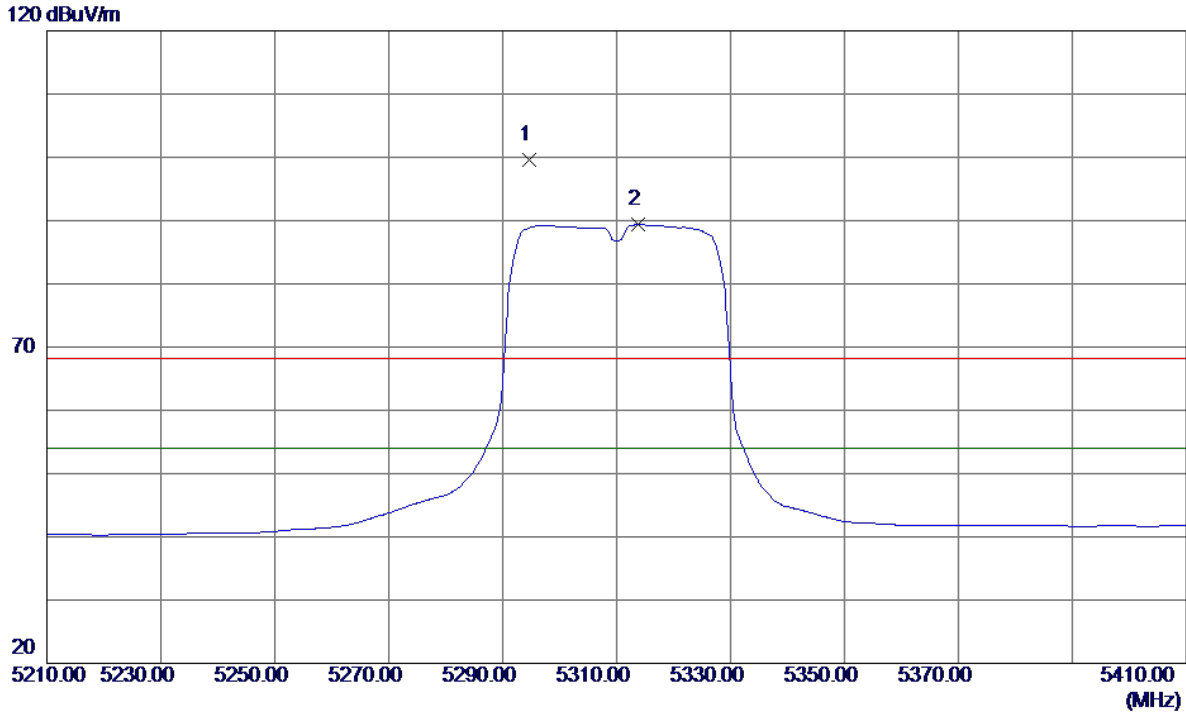

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5294.6000	58.46	41.09	99.55	68.30	31.25	Peak	No Limit
2 *	5313.8000	48.15	41.19	89.34	54.00	35.34	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

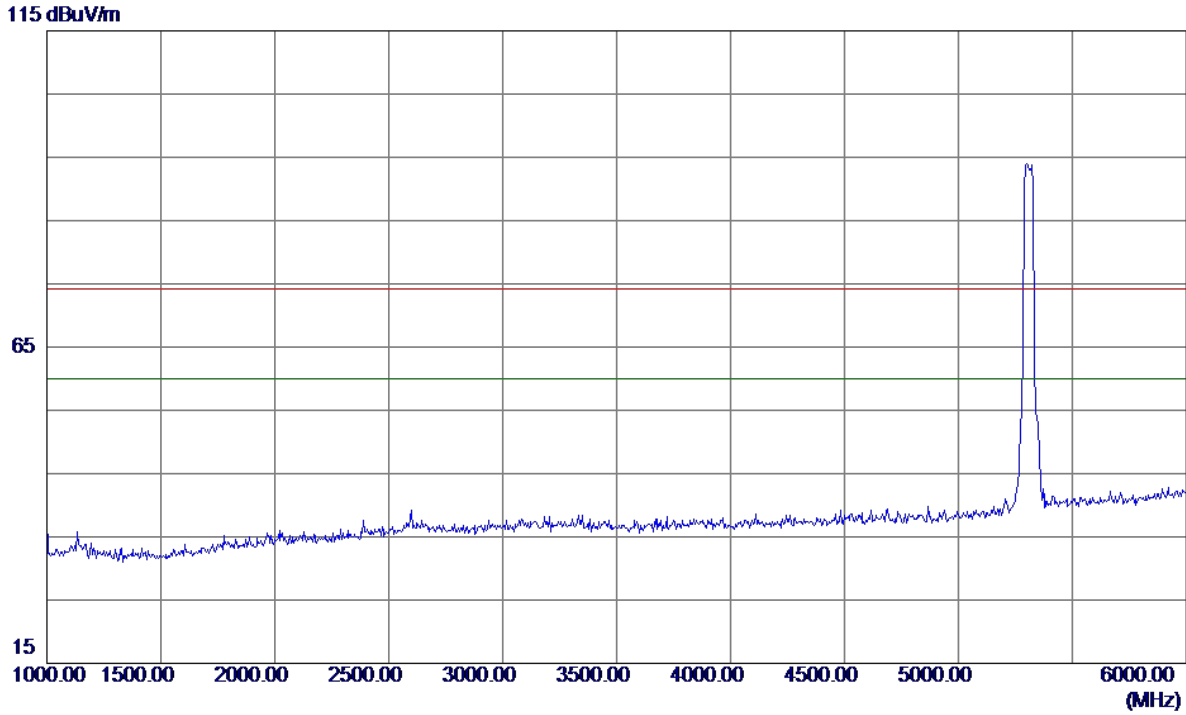


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

115 dBuV/m

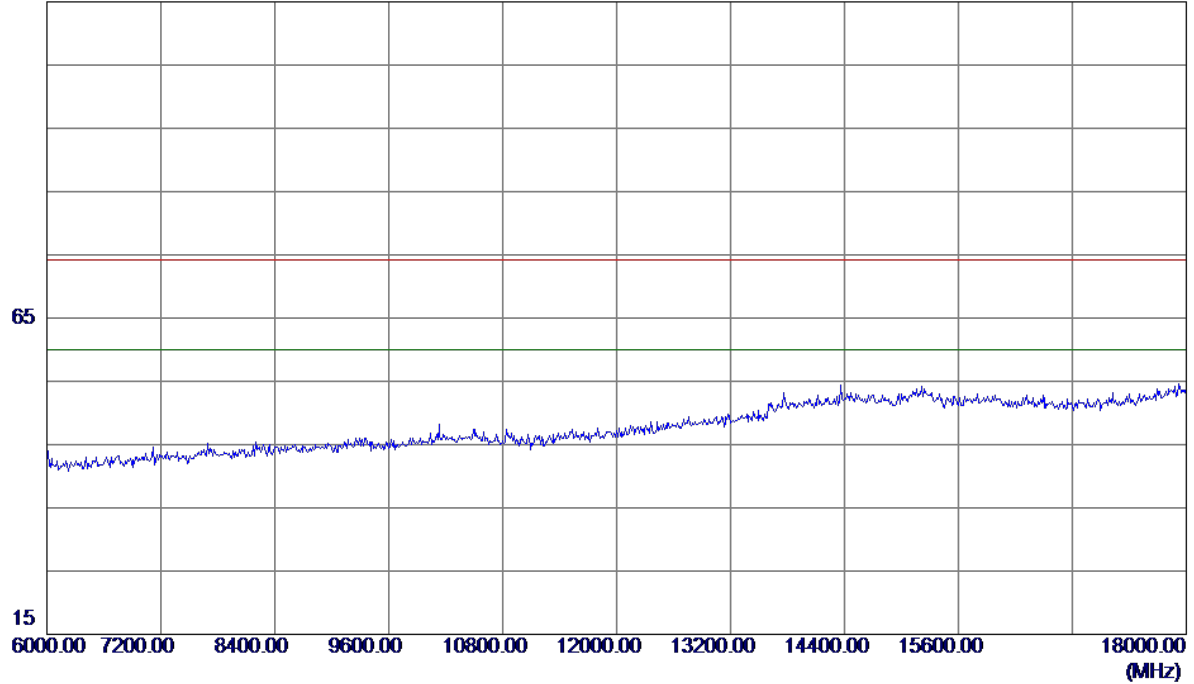


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal


115 dBuV/m

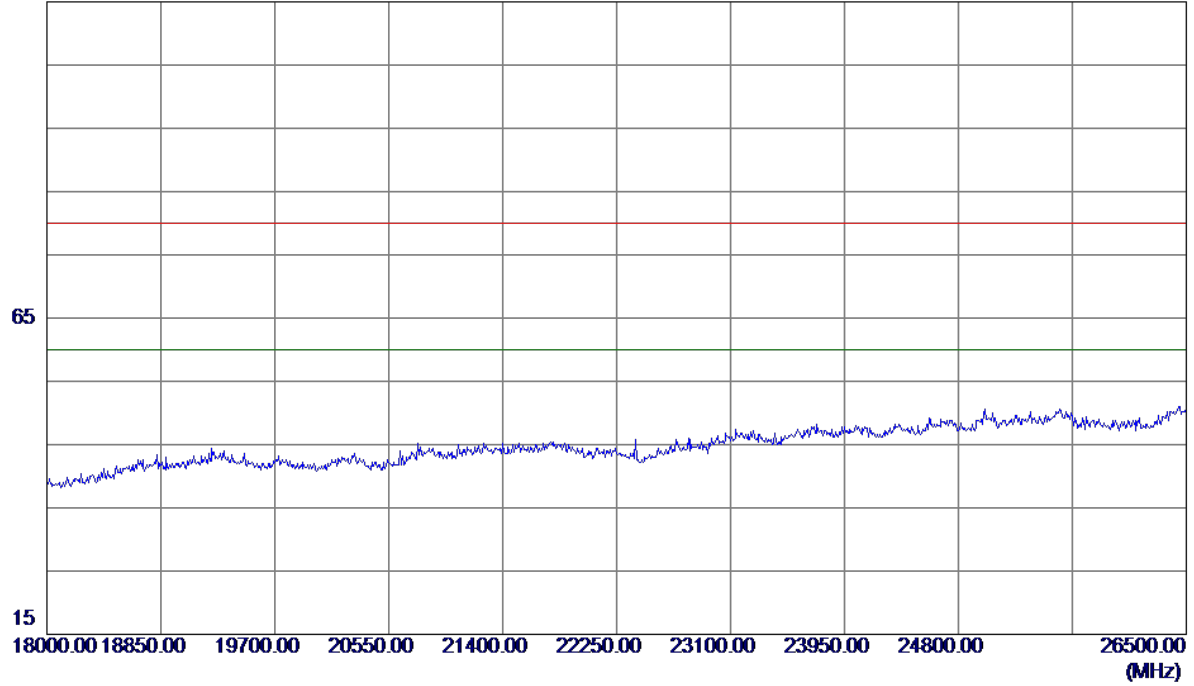

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

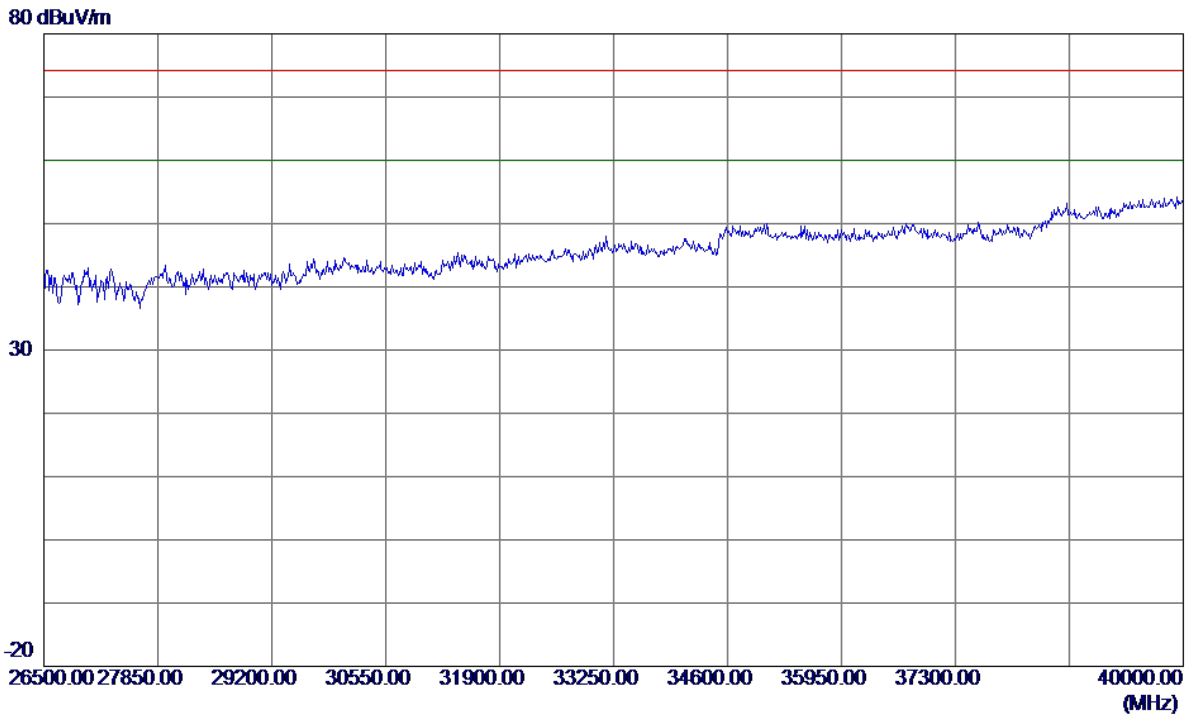


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

120 dBuV/m

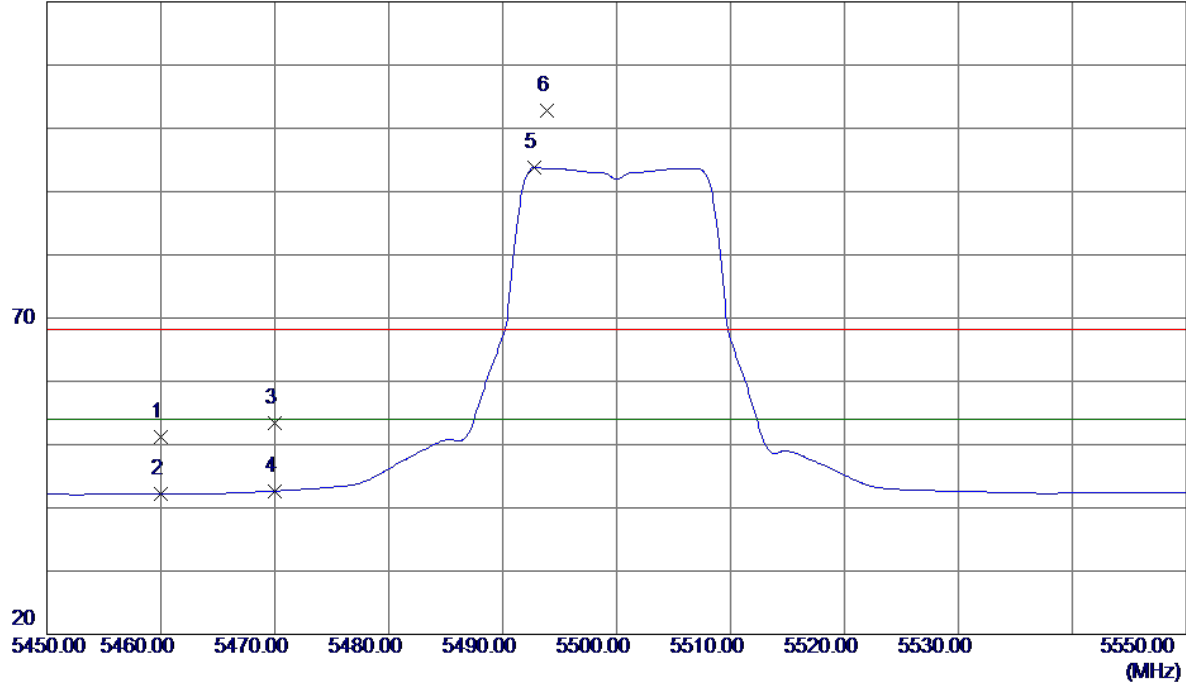


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.18	41.97	51.15	68.30	-17.15	Peak	
2	5460.0000	0.23	41.97	42.20	54.00	-11.80	AVG	
3	5470.0000	11.37	42.02	53.39	68.30	-14.91	Peak	
4	5470.0000	0.63	42.02	42.65	54.00	-11.35	AVG	
5 *	5492.8000	51.65	42.14	93.79	54.00	39.79	AVG	No Limit
6	5493.9000	60.65	42.15	102.80	68.30	34.50	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

115 dBuV/m

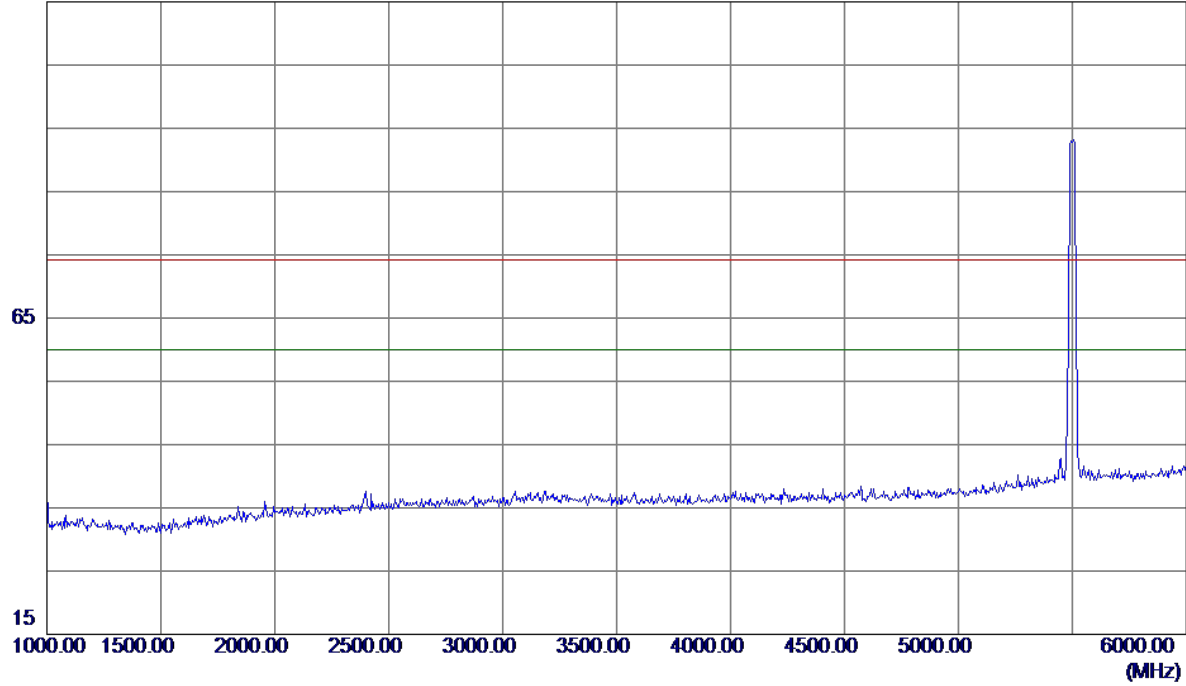


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

115 dBuV/m

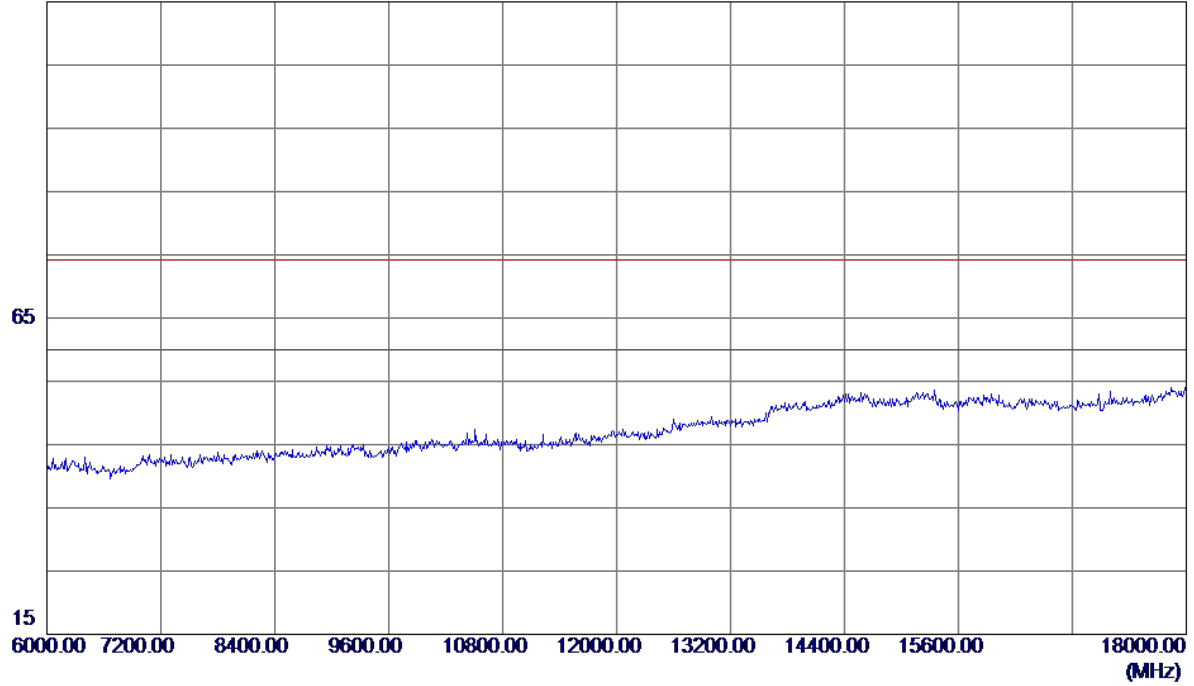


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical


115 dBuV/m

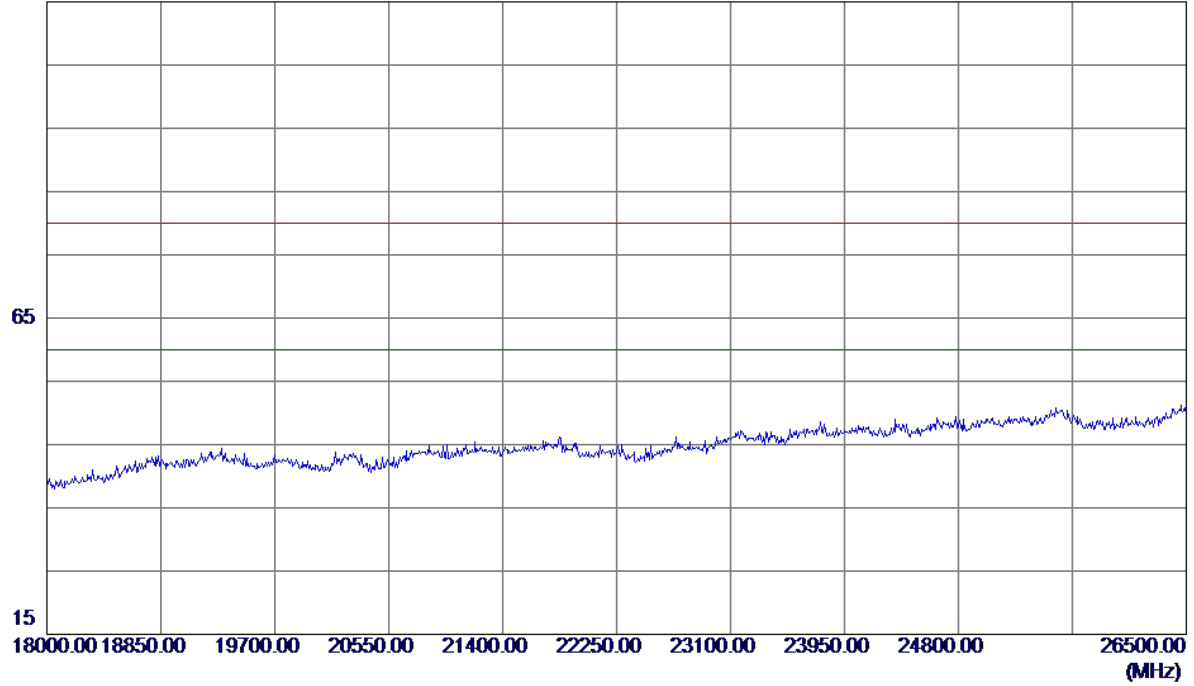

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

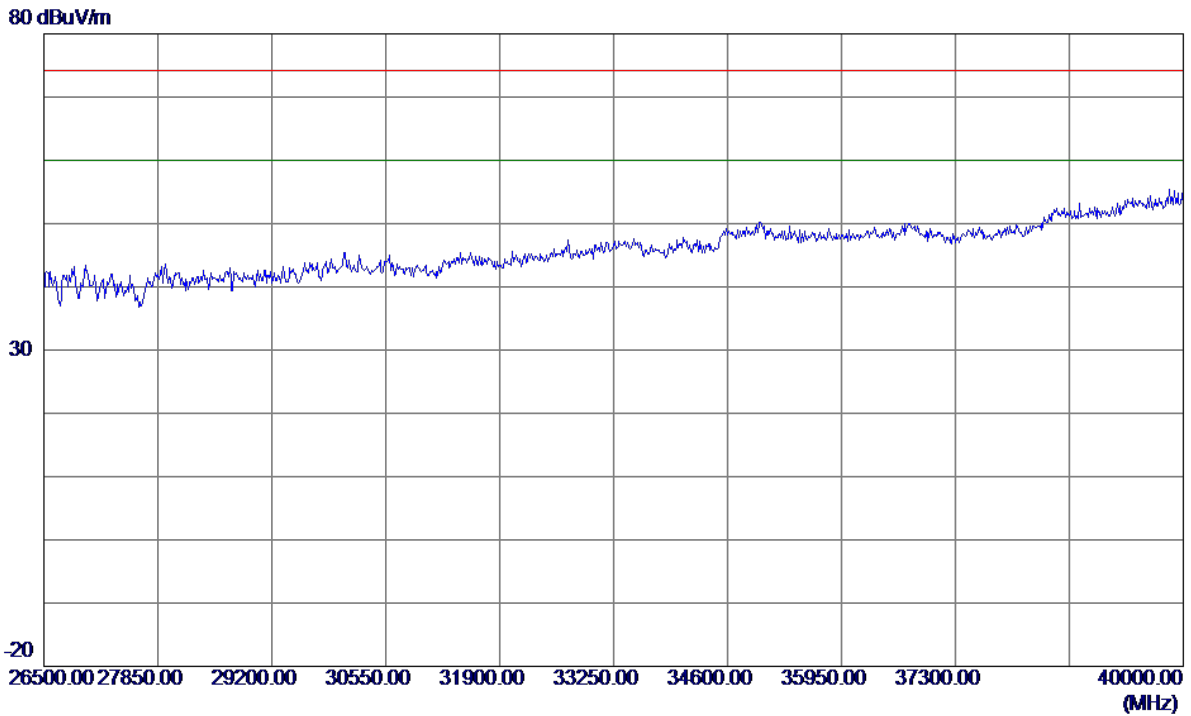

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

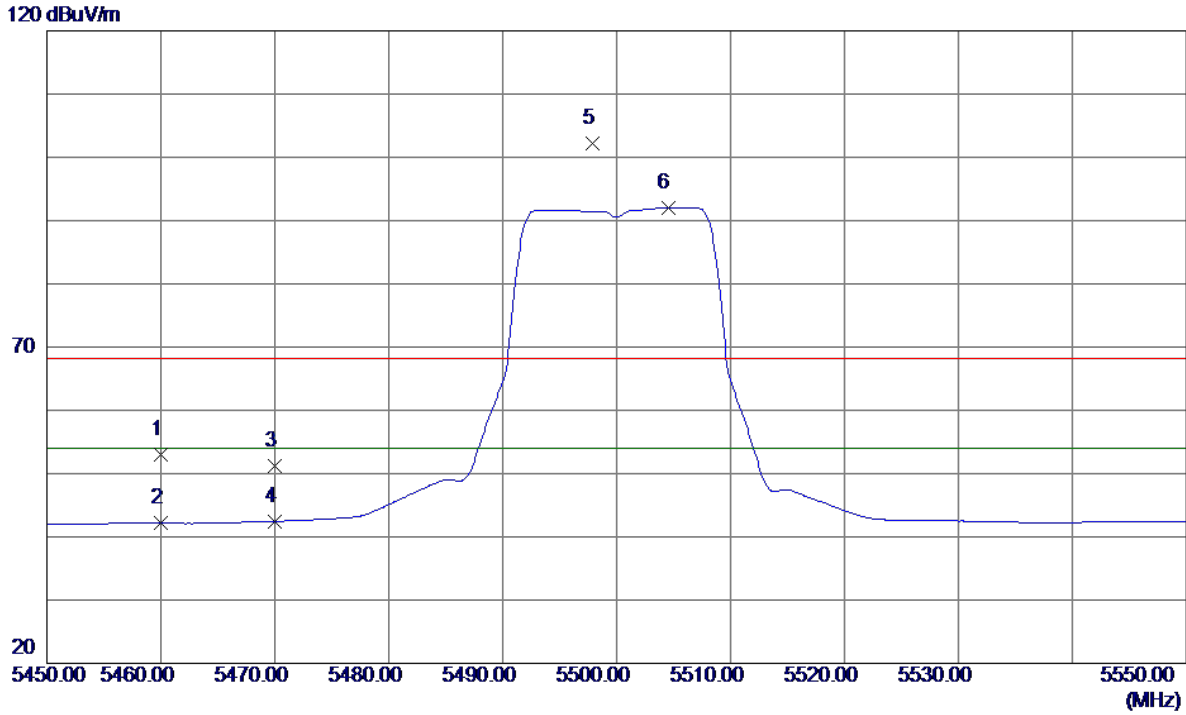


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.98	41.97	52.95	68.30	-15.35	Peak	
2	5460.0000	0.19	41.97	42.16	54.00	-11.84	AVG	
3	5470.0000	9.11	42.02	51.13	68.30	-17.17	Peak	
4	5470.0000	0.42	42.02	42.44	54.00	-11.56	AVG	
5	5497.9000	59.99	42.17	102.16	68.30	33.86	Peak	No Limit
6 *	5504.5000	49.86	42.20	92.06	54.00	38.06	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

115 dBuV/m

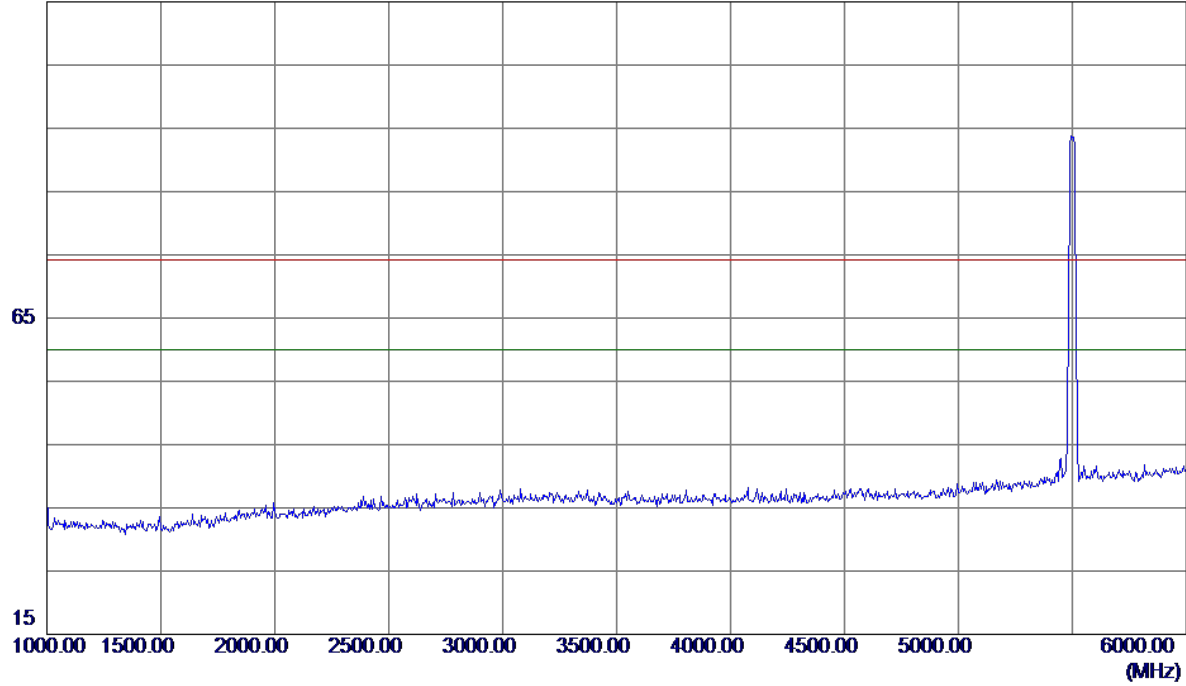


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

115 dBuV/m

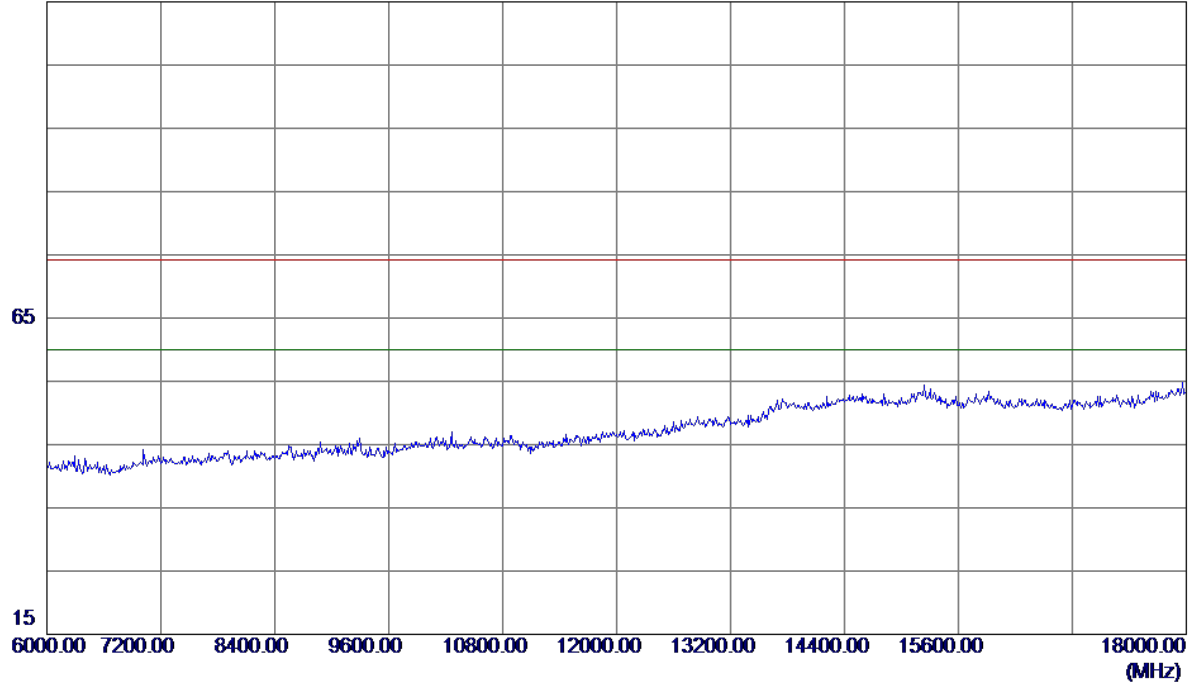


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal


115 dBuV/m

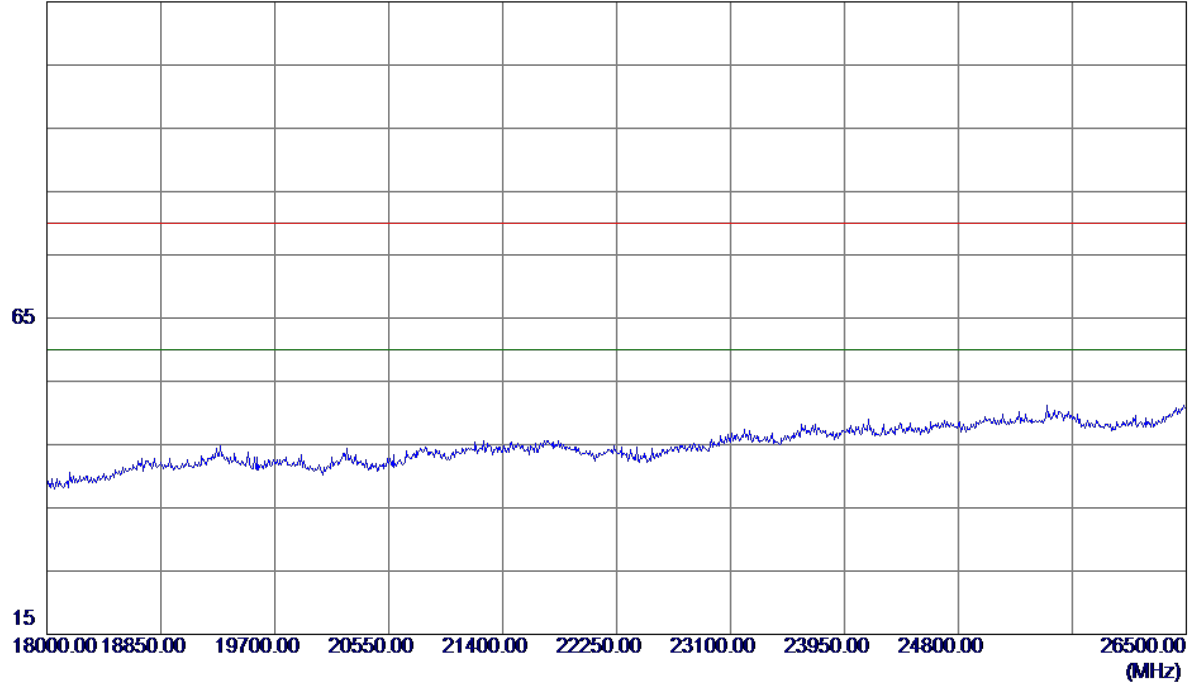

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

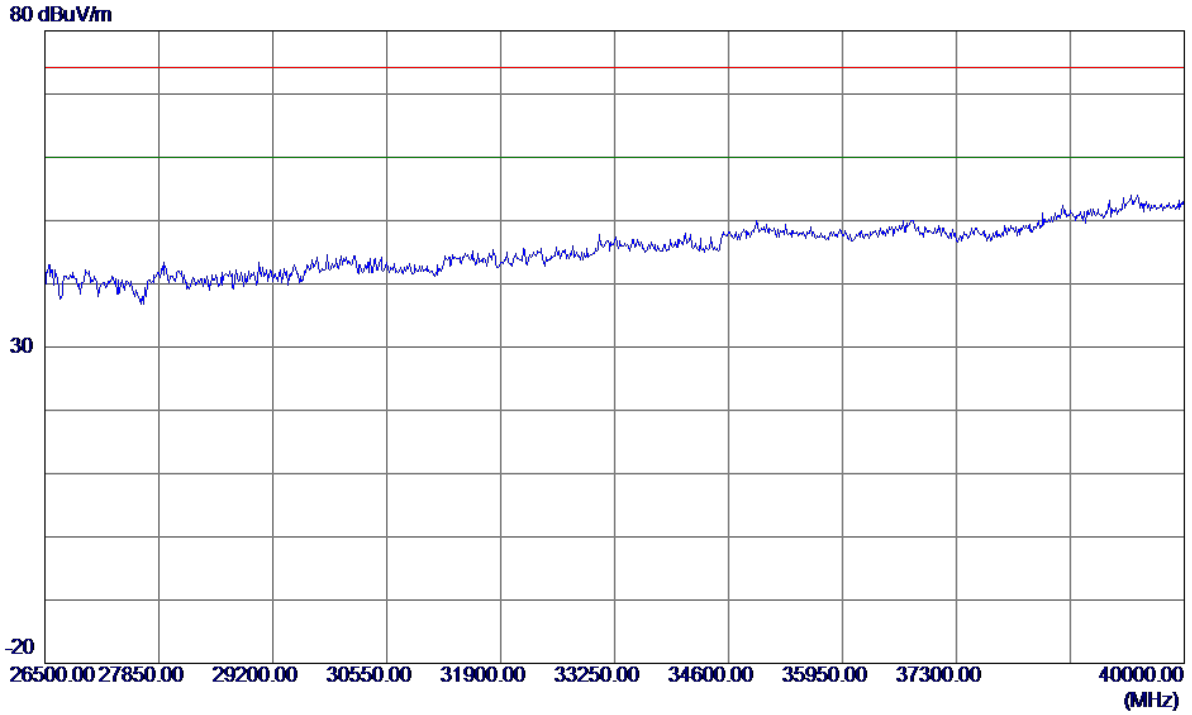


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

120 dBuV/m

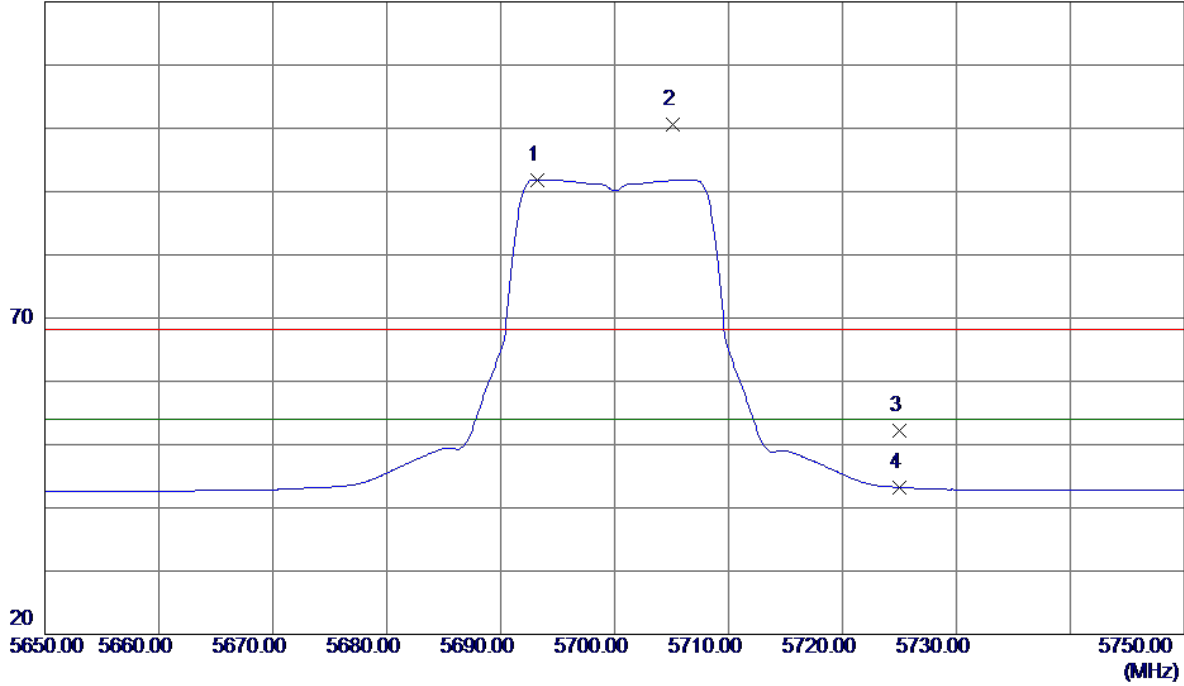


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.2000	49.02	42.83	91.85	54.00	37.85	AVG	No Limit
2	5705.1000	57.66	42.87	100.53	68.30	32.23	Peak	No Limit
3	5725.0000	9.28	42.94	52.22	68.30	-16.08	Peak	
4	5725.0000	0.26	42.94	43.20	54.00	-10.80	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

115 dBuV/m

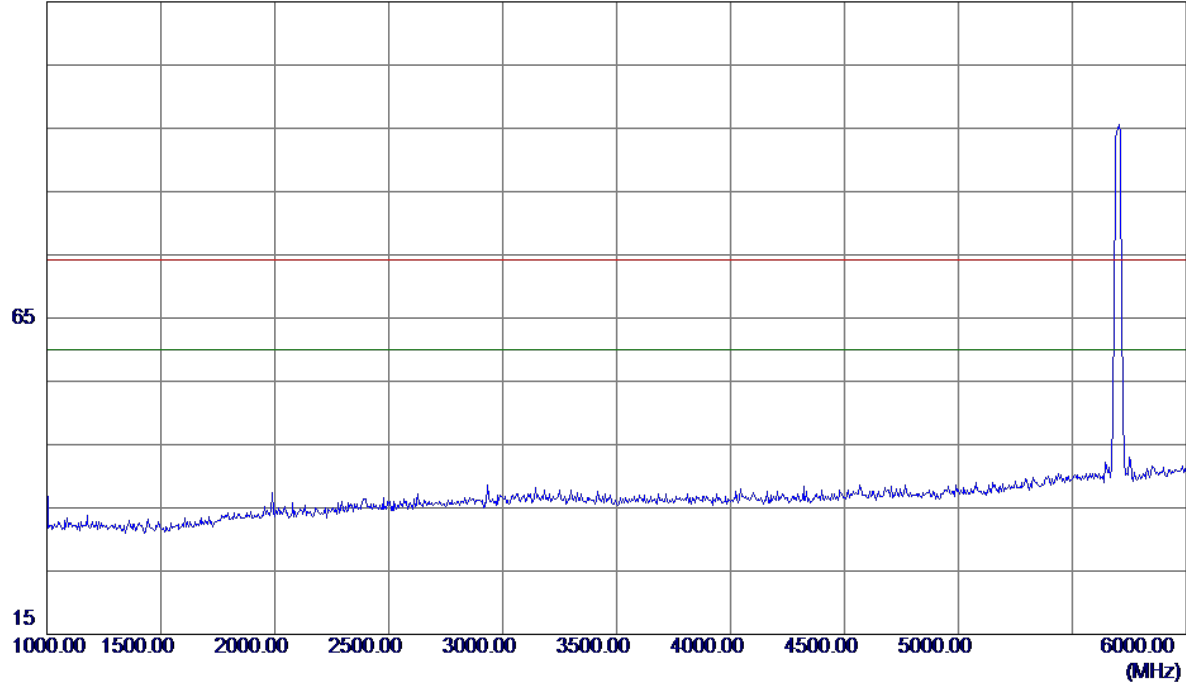


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

115 dBuV/m

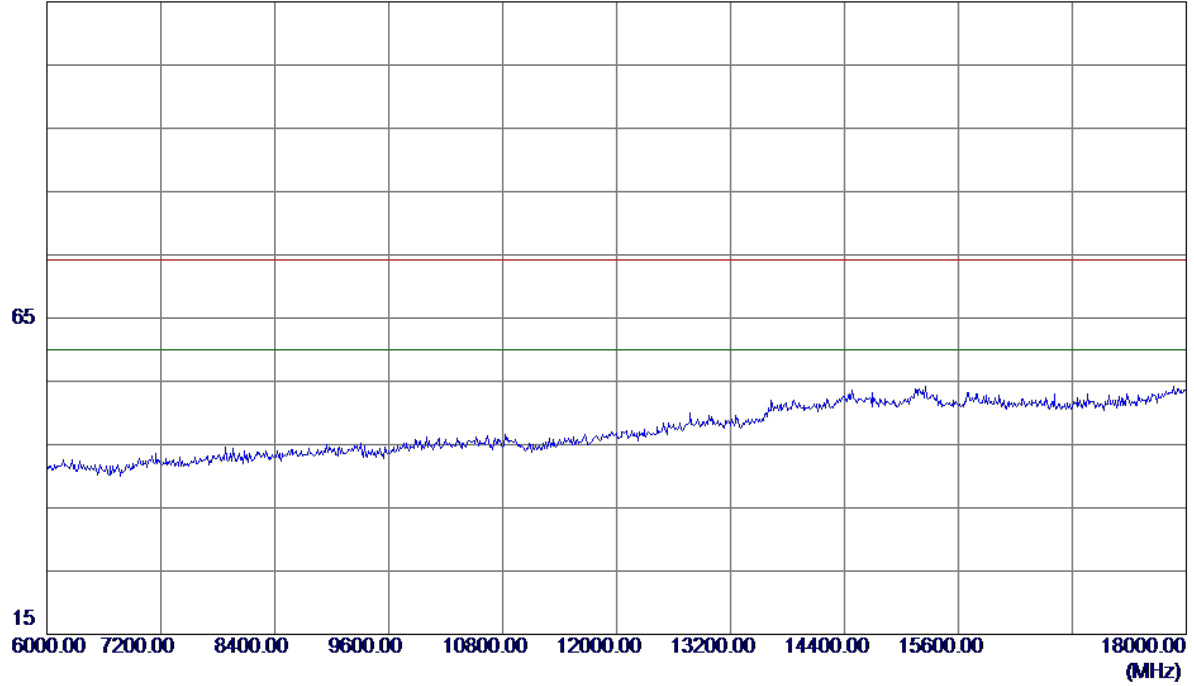


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical


115 dBuV/m

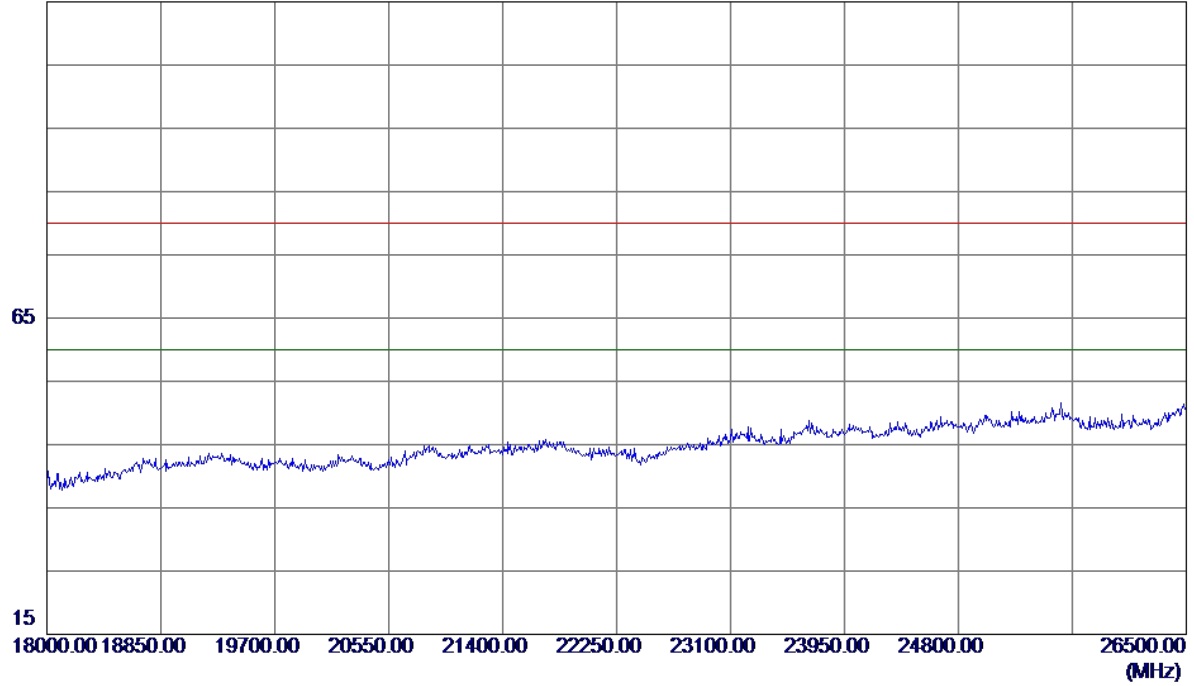

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

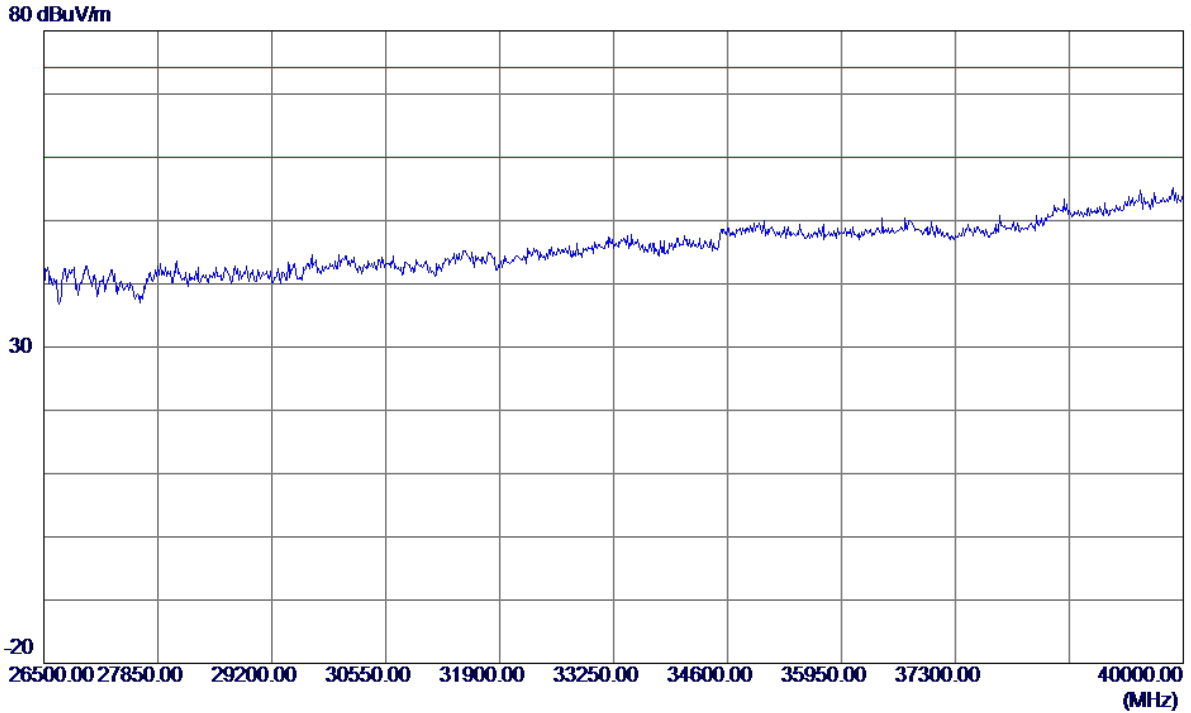


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

120 dBuV/m

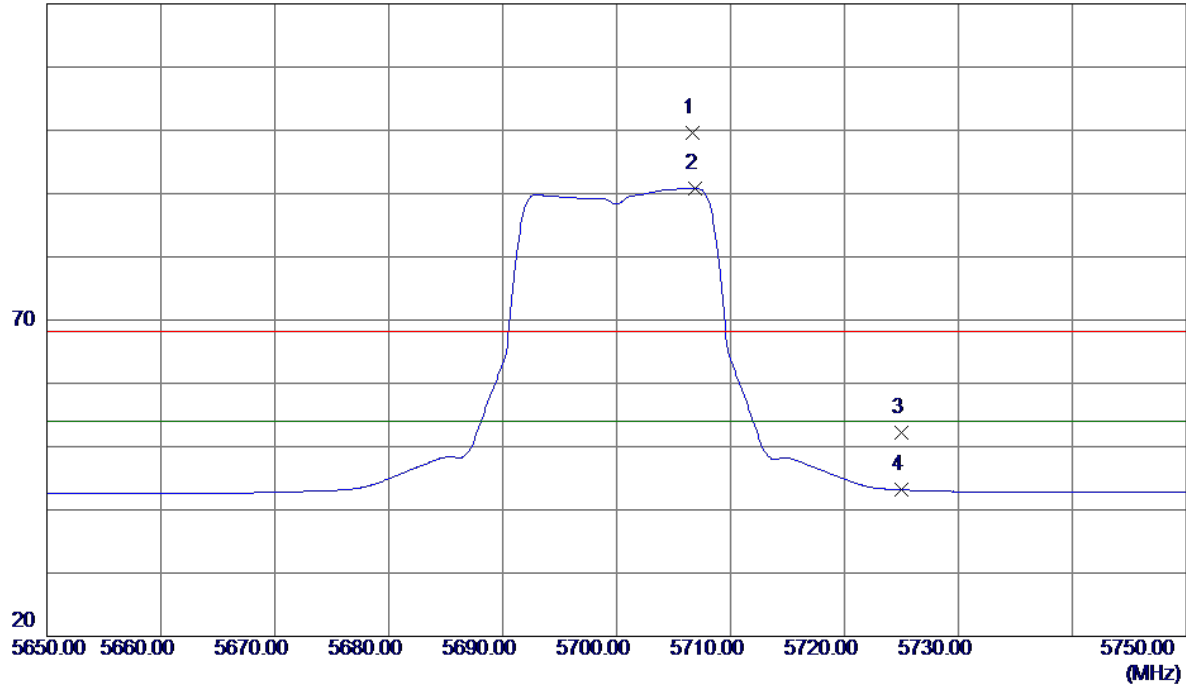


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5706.7000	56.73	42.87	99.60	68.30	31.30	Peak	No Limit
2 *	5706.9000	47.87	42.88	90.75	54.00	36.75	AVG	No Limit
3	5725.0000	9.23	42.94	52.17	68.30	-16.13	Peak	
4	5725.0000	0.20	42.94	43.14	54.00	-10.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

115 dBuV/m

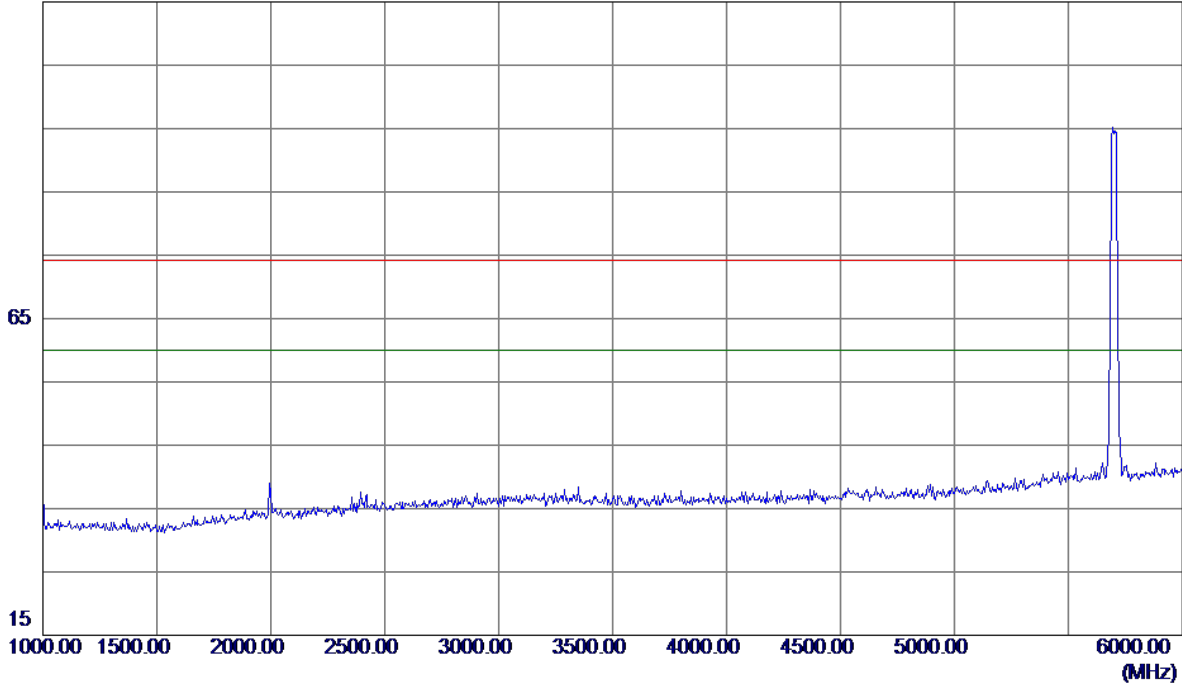


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

115 dBuV/m

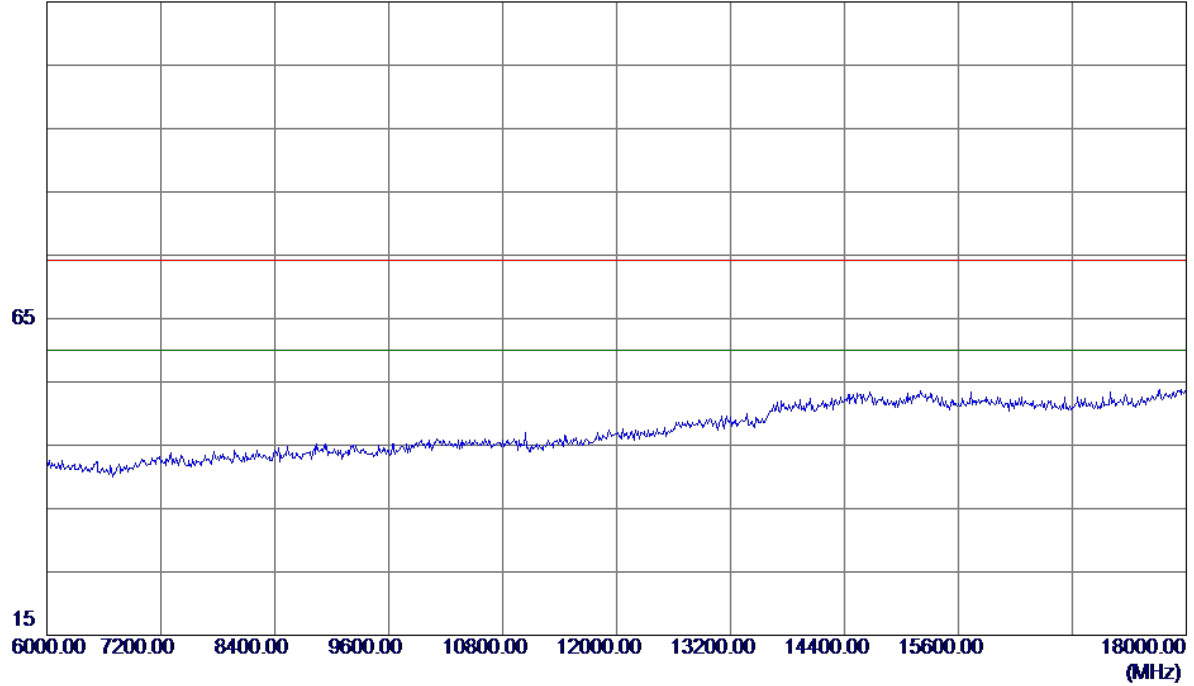


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal


115 dBuV/m

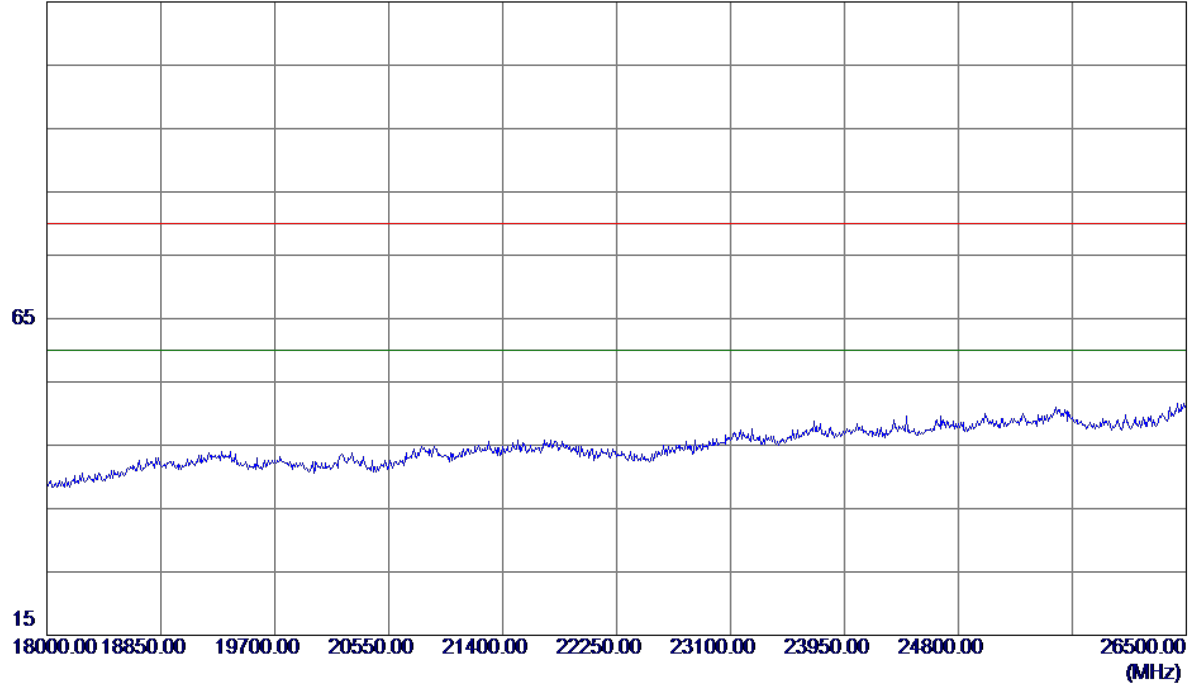

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

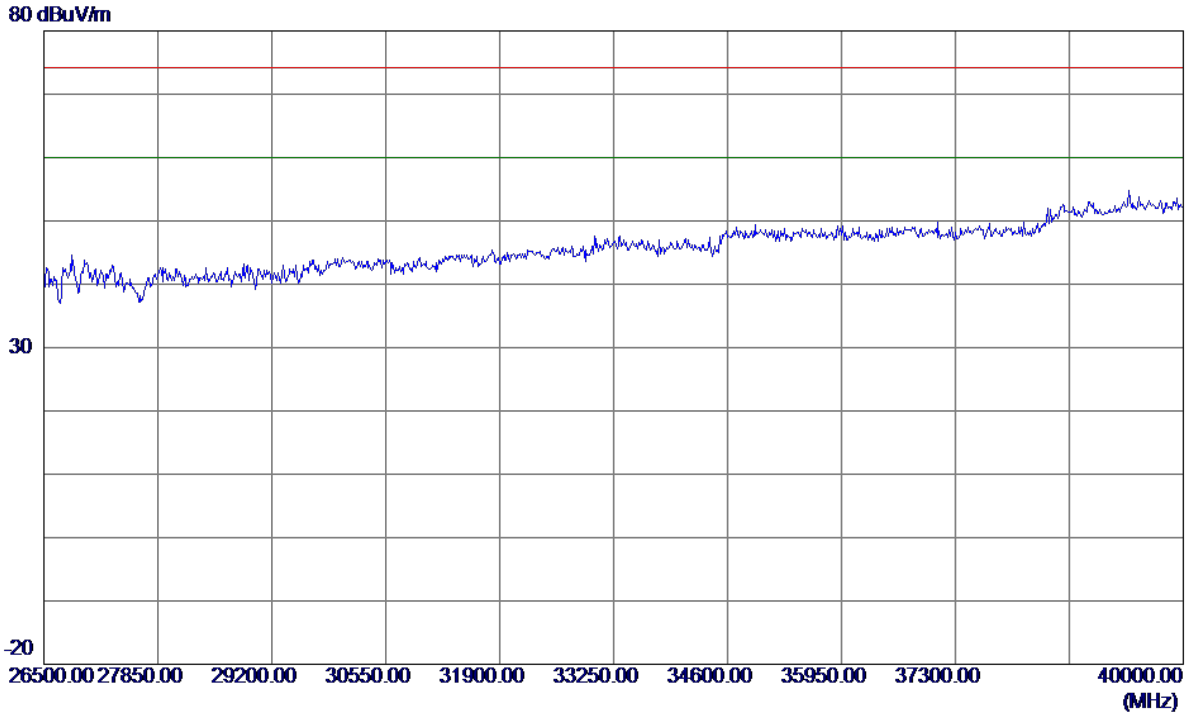


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

120 dBuV/m

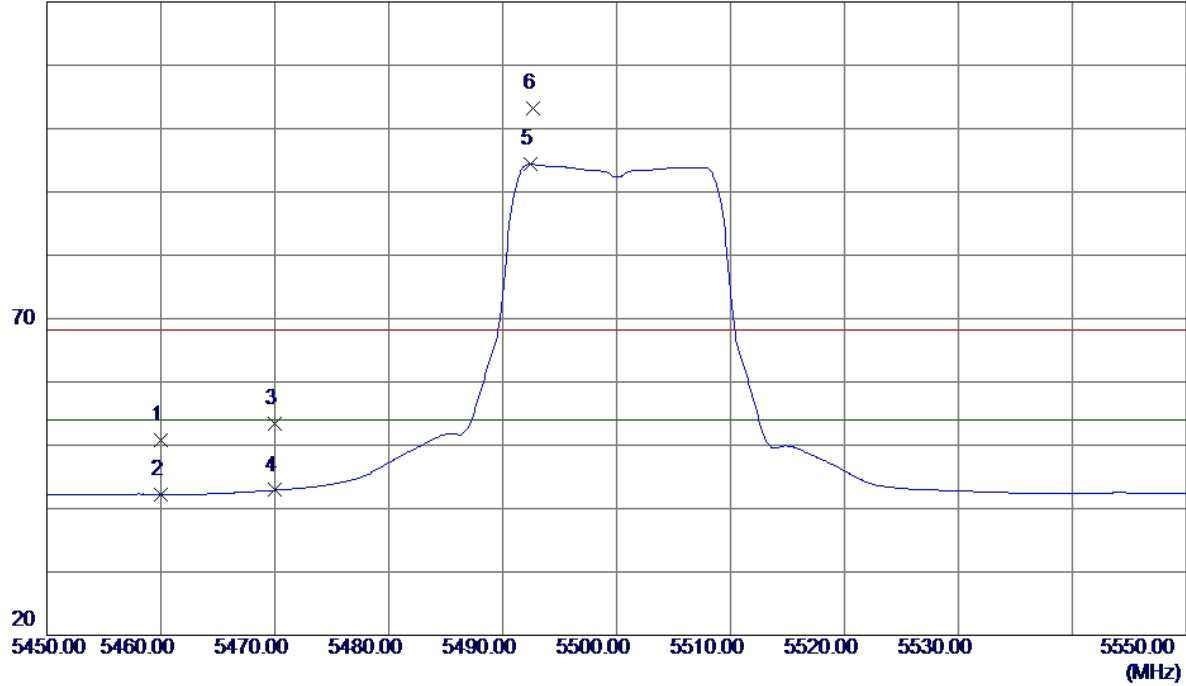


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.89	41.97	50.86	68.30	-17.44	Peak	
2	5460.0000	0.30	41.97	42.27	54.00	-11.73	AVG	
3	5470.0000	11.45	42.02	53.47	68.30	-14.83	Peak	
4	5470.0000	0.88	42.02	42.90	54.00	-11.10	AVG	
5 *	5492.4000	52.22	42.14	94.36	54.00	40.36	AVG	No Limit
6	5492.7000	61.13	42.14	103.27	68.30	34.97	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

115 dBuV/m

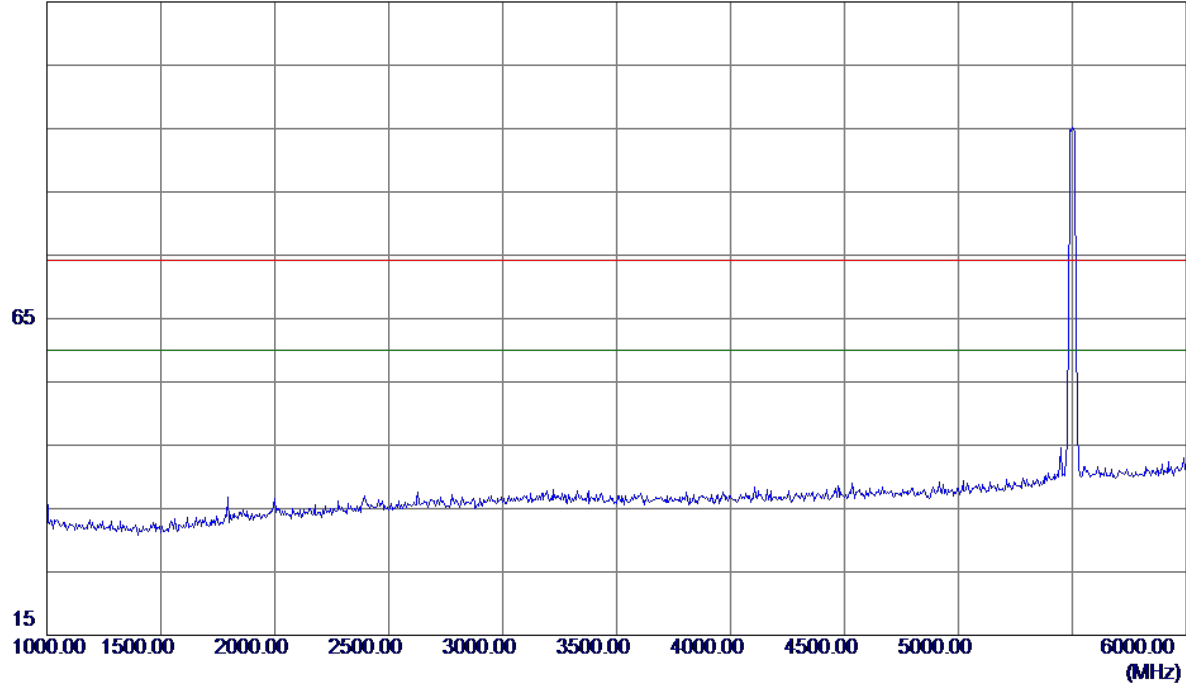


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

115 dBuV/m

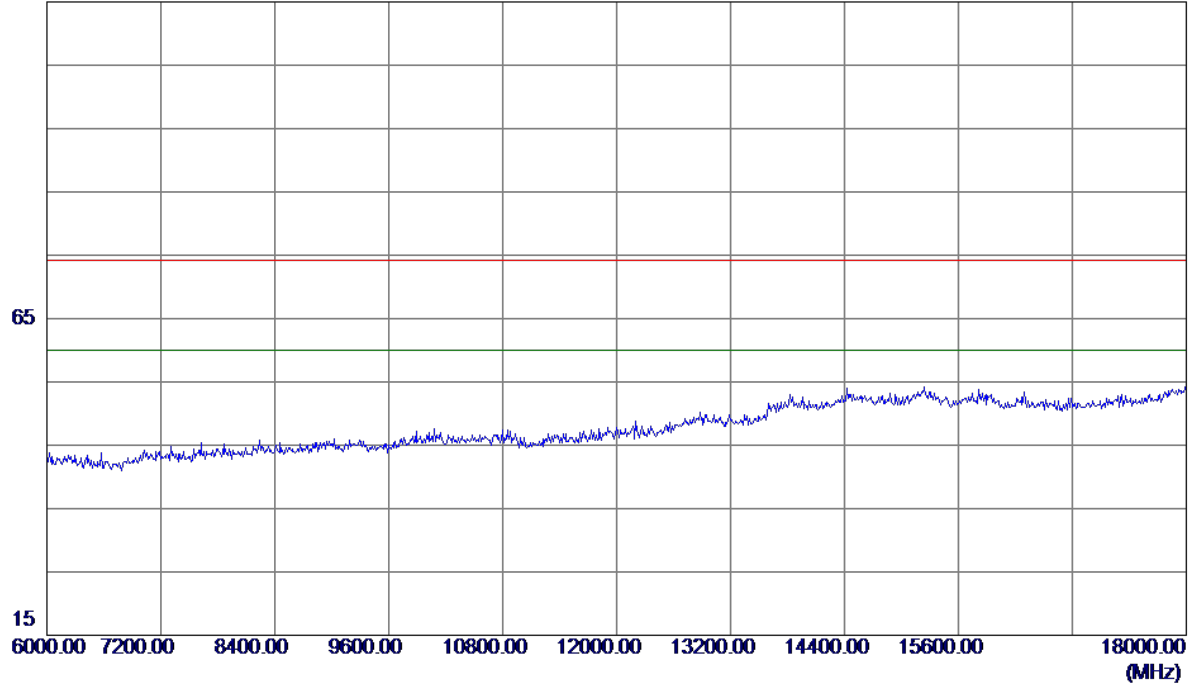


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical


115 dBuV/m

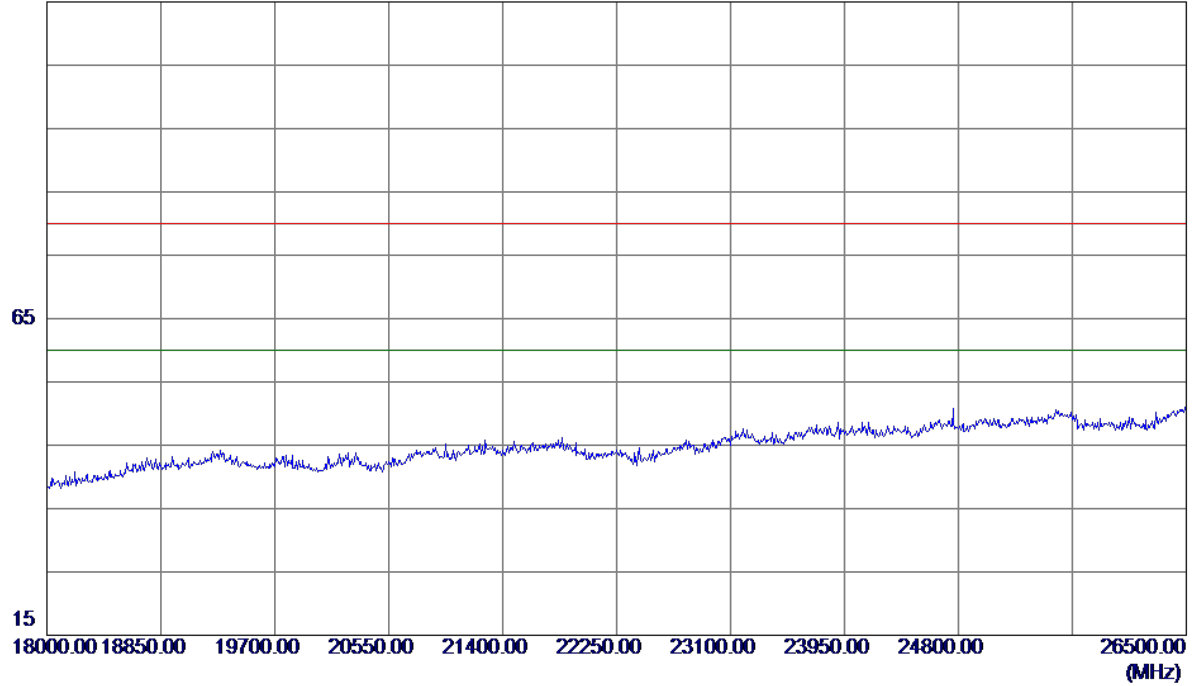

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

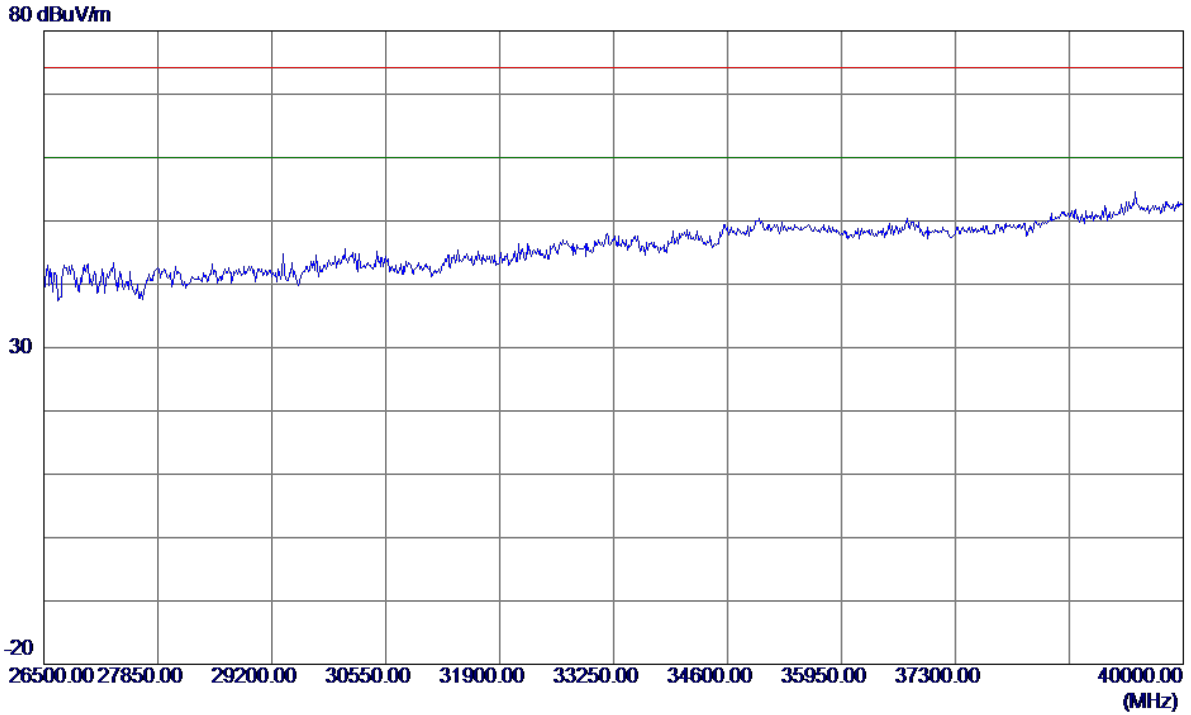


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

120 dBuV/m

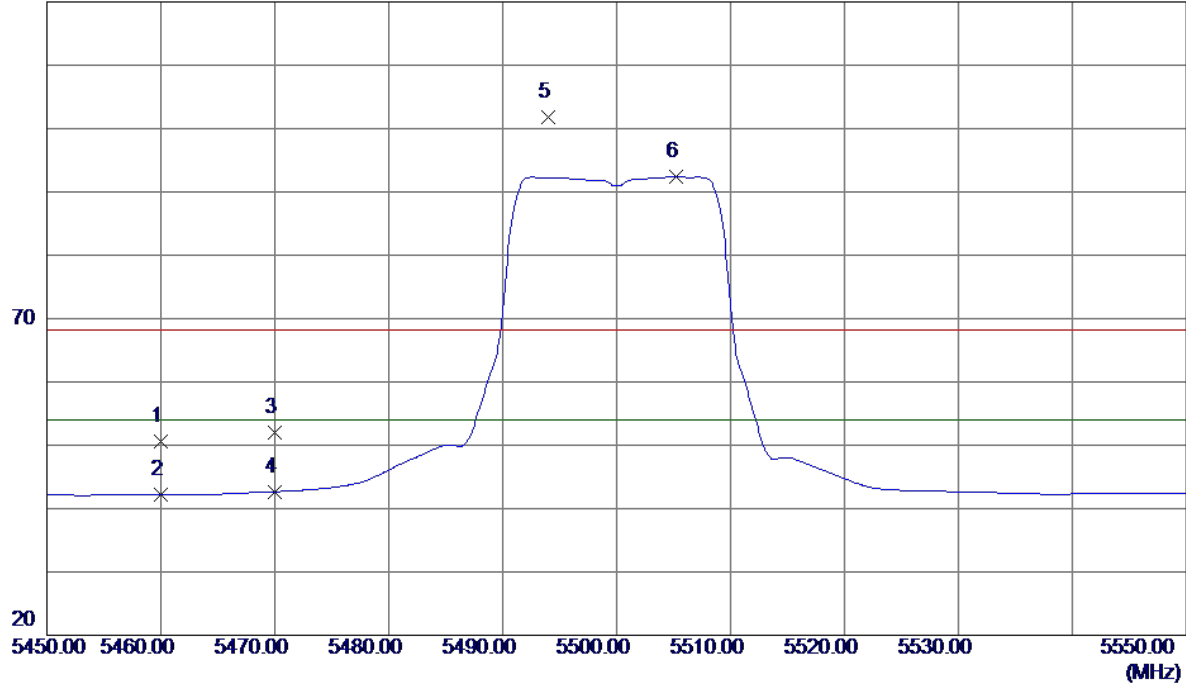


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.54	41.97	50.51	68.30	-17.79	Peak	
2	5460.0000	0.26	41.97	42.23	54.00	-11.77	AVG	
3	5470.0000	10.04	42.02	52.06	68.30	-16.24	Peak	
4	5470.0000	0.64	42.02	42.66	54.00	-11.34	AVG	
5	5494.0000	59.73	42.15	101.88	68.30	33.58	Peak	No Limit
6 *	5505.2000	50.14	42.20	92.34	54.00	38.34	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

115 dBuV/m

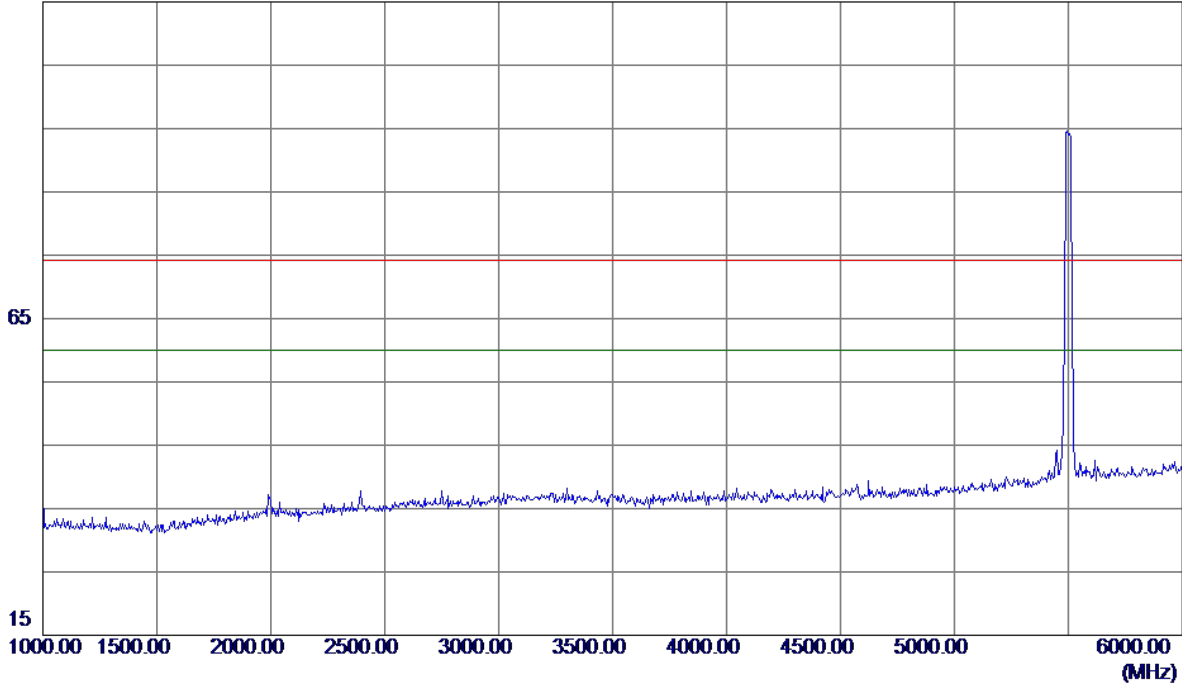


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

115 dBuV/m

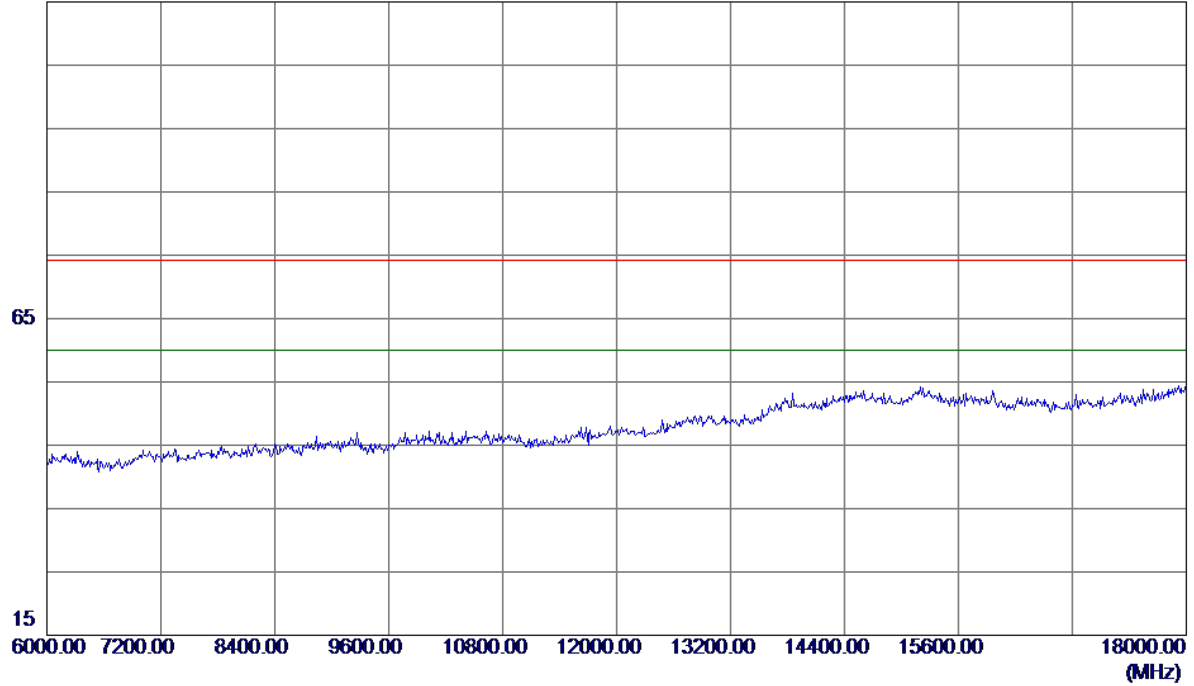


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal


115 dBuV/m

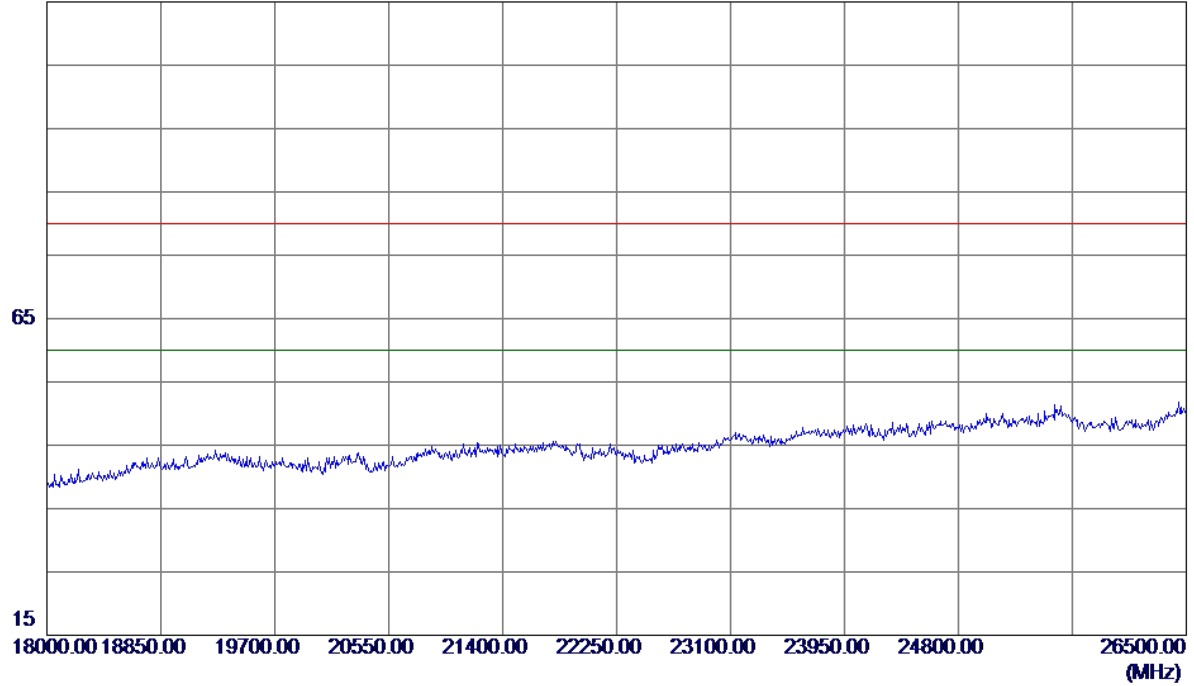

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

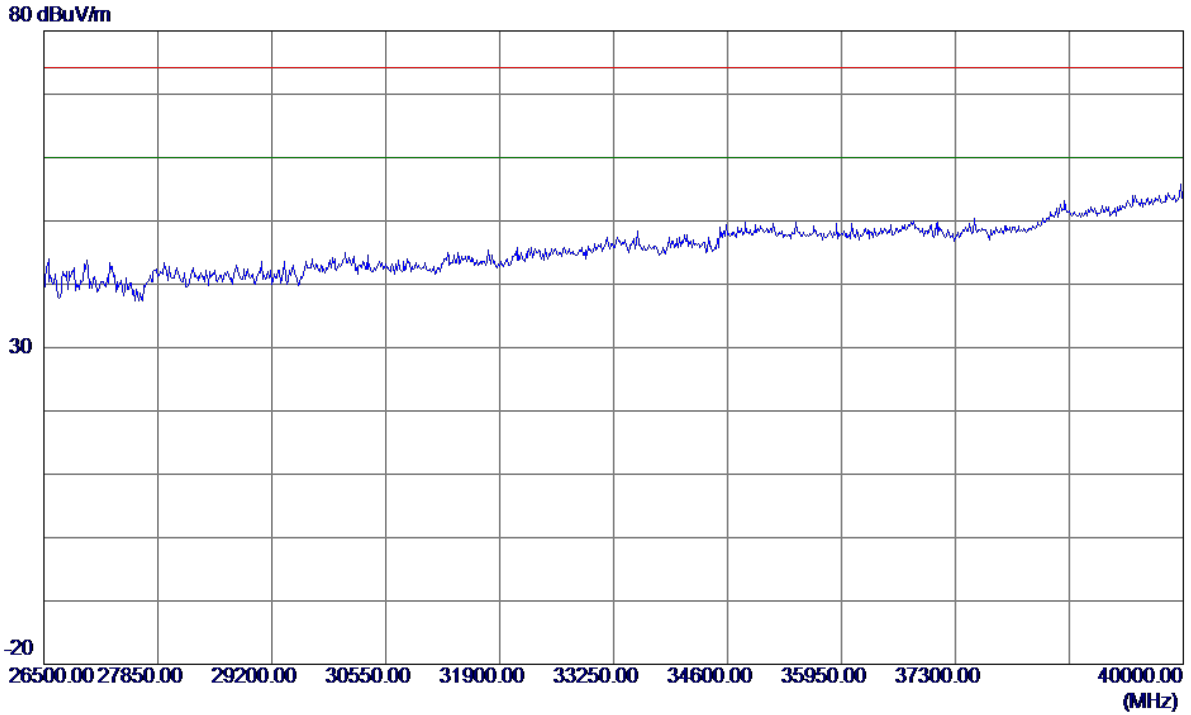


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

120 dBuV/m

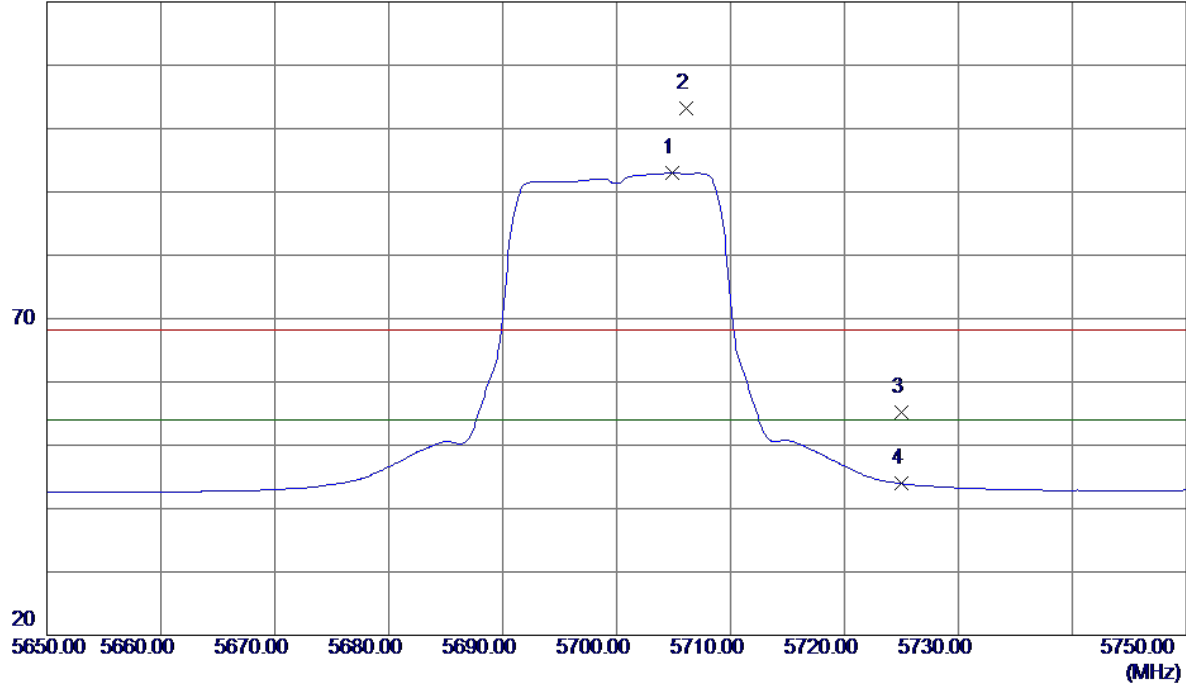


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5704.9000	50.14	42.87	93.01	54.00	39.01	AVG	No Limit
2	5706.1000	60.26	42.87	103.13	68.30	34.83	Peak	No Limit
3	5725.0000	12.21	42.94	55.15	68.30	-13.15	Peak	
4	5725.0000	0.98	42.94	43.92	54.00	-10.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

115 dBuV/m

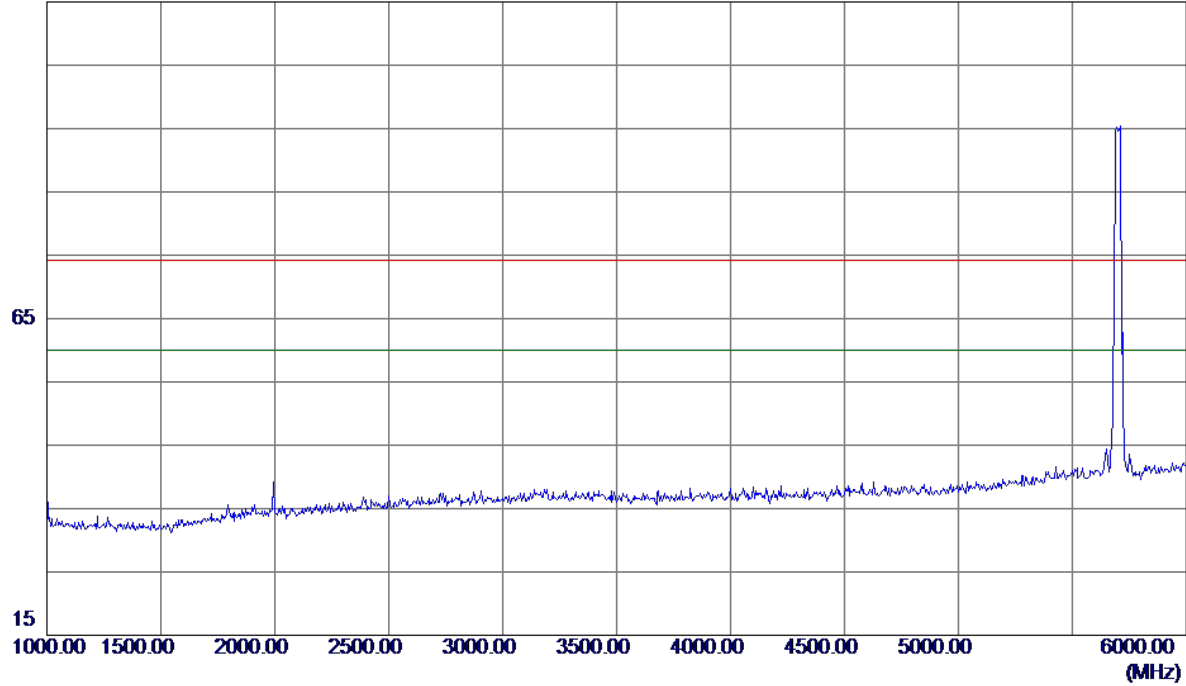


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

115 dBuV/m

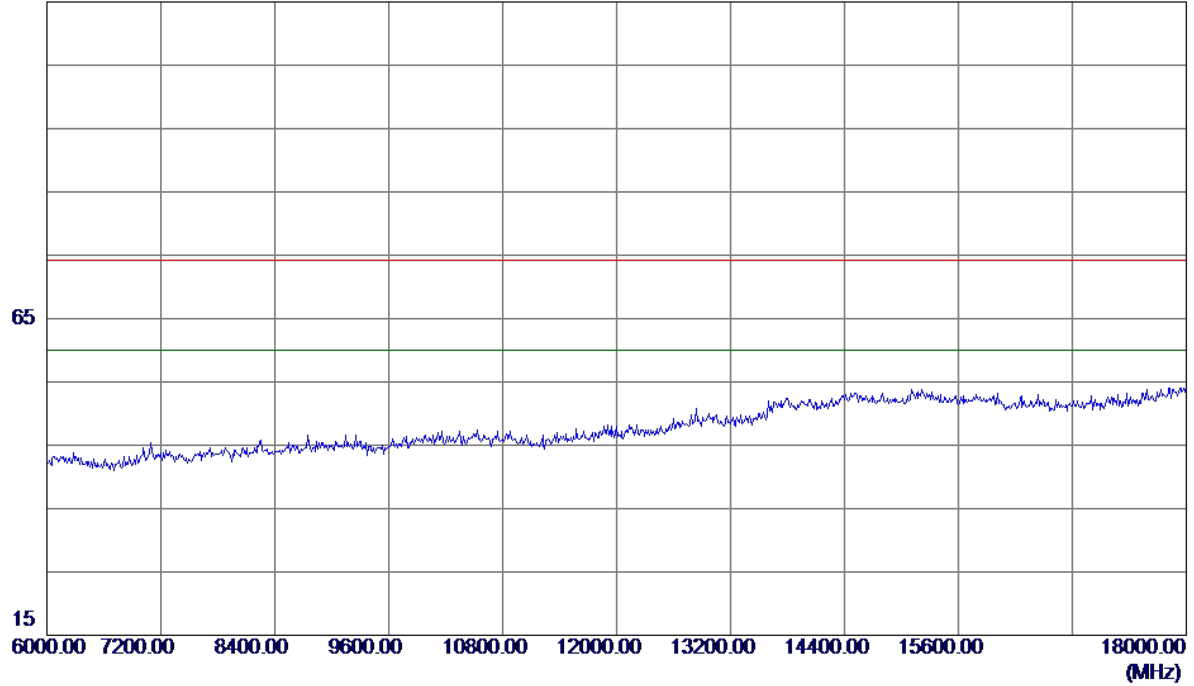


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

115 dBuV/m

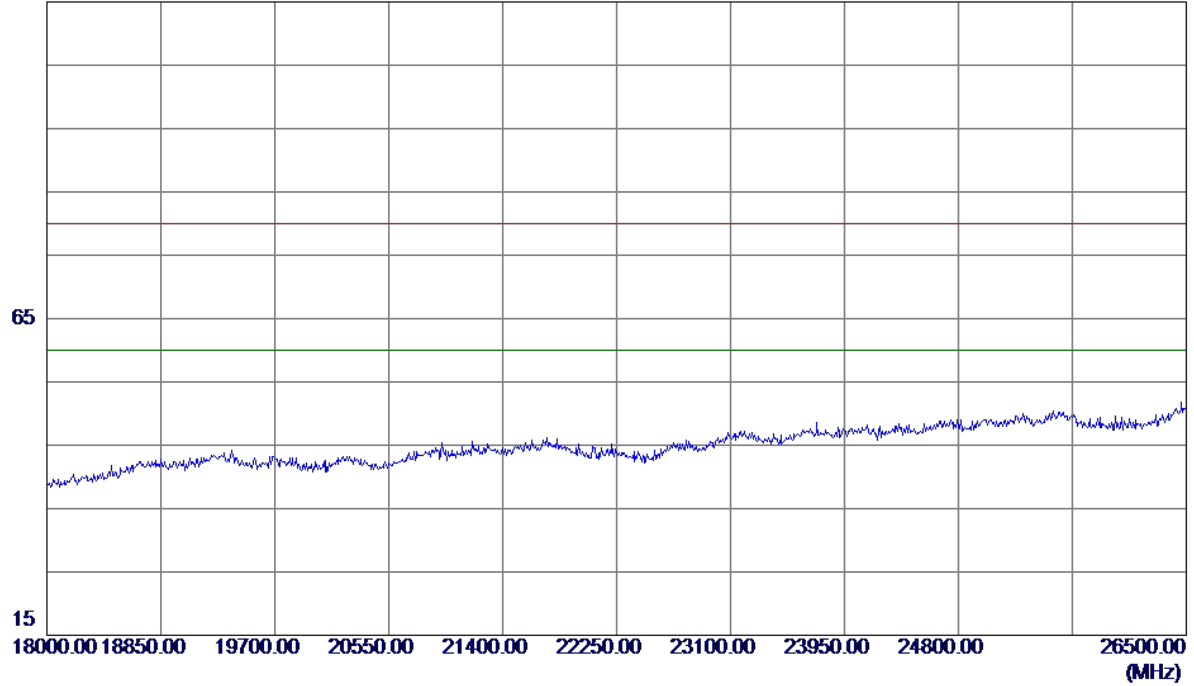


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

80 dBuV/m

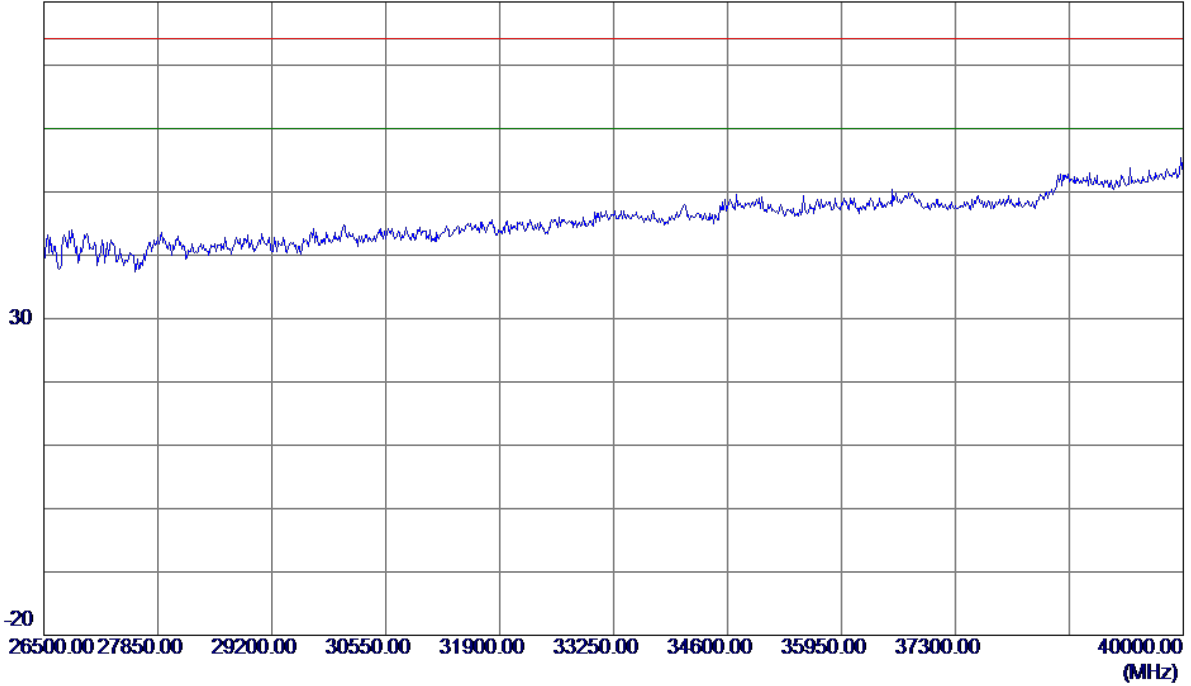


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

120 dBuV/m

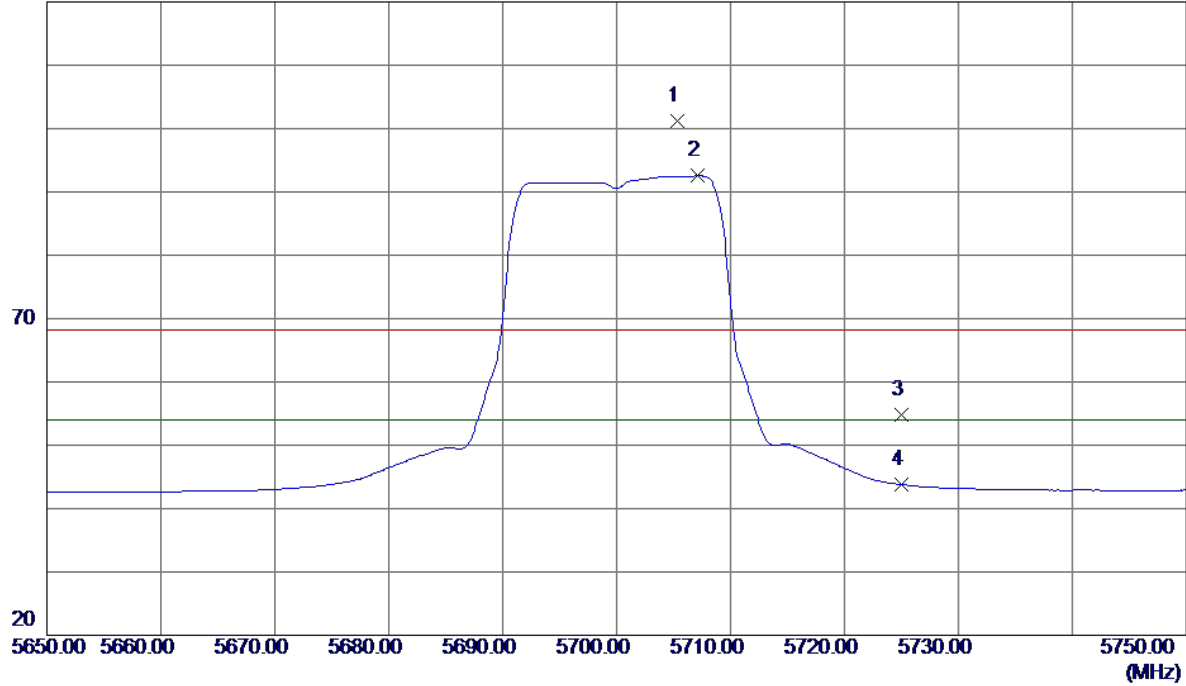


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5705.3000	58.39	42.87	101.26	68.30	32.96	Peak	No Limit
2 *	5707.1000	49.64	42.88	92.52	54.00	38.52	AVG	No Limit
3	5725.0000	11.83	42.94	54.77	68.30	-13.53	Peak	
4	5725.0000	0.84	42.94	43.78	54.00	-10.22	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

115 dBuV/m

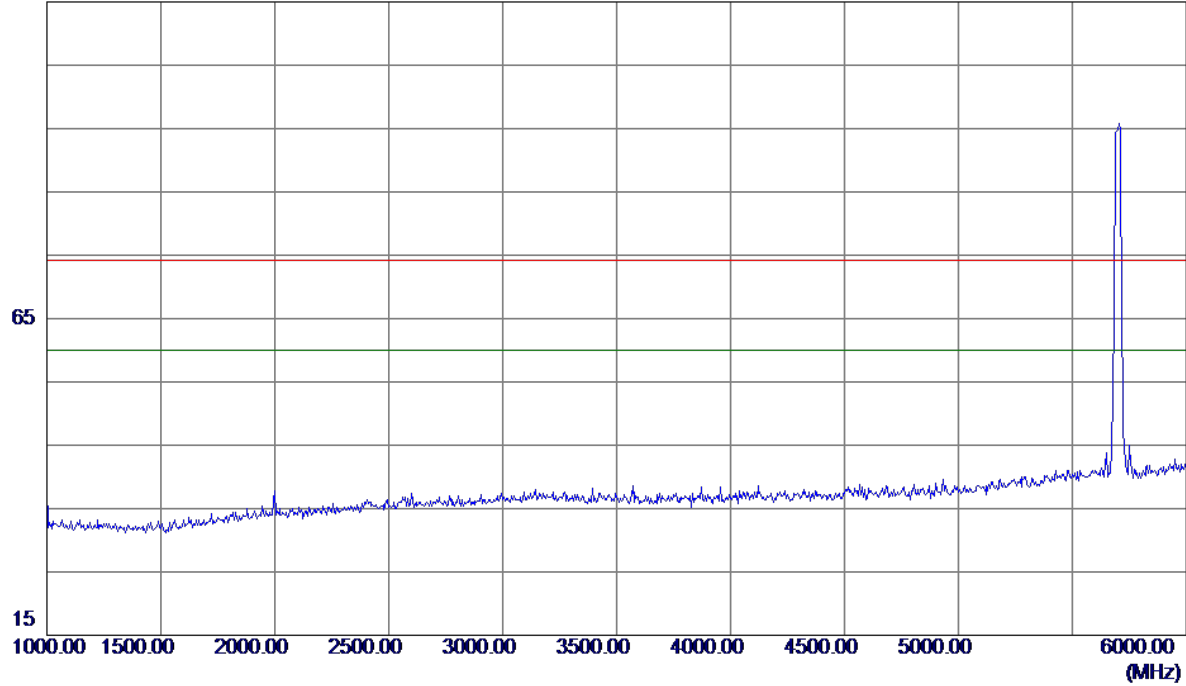


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

115 dBuV/m

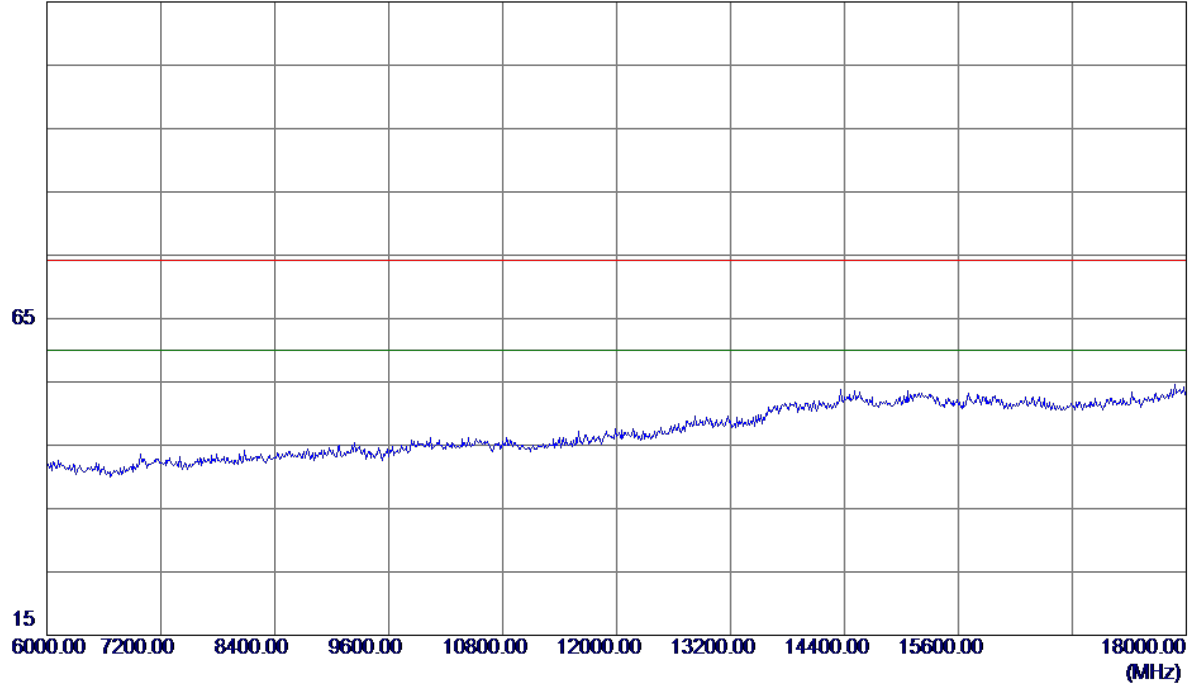


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal


115 dBuV/m

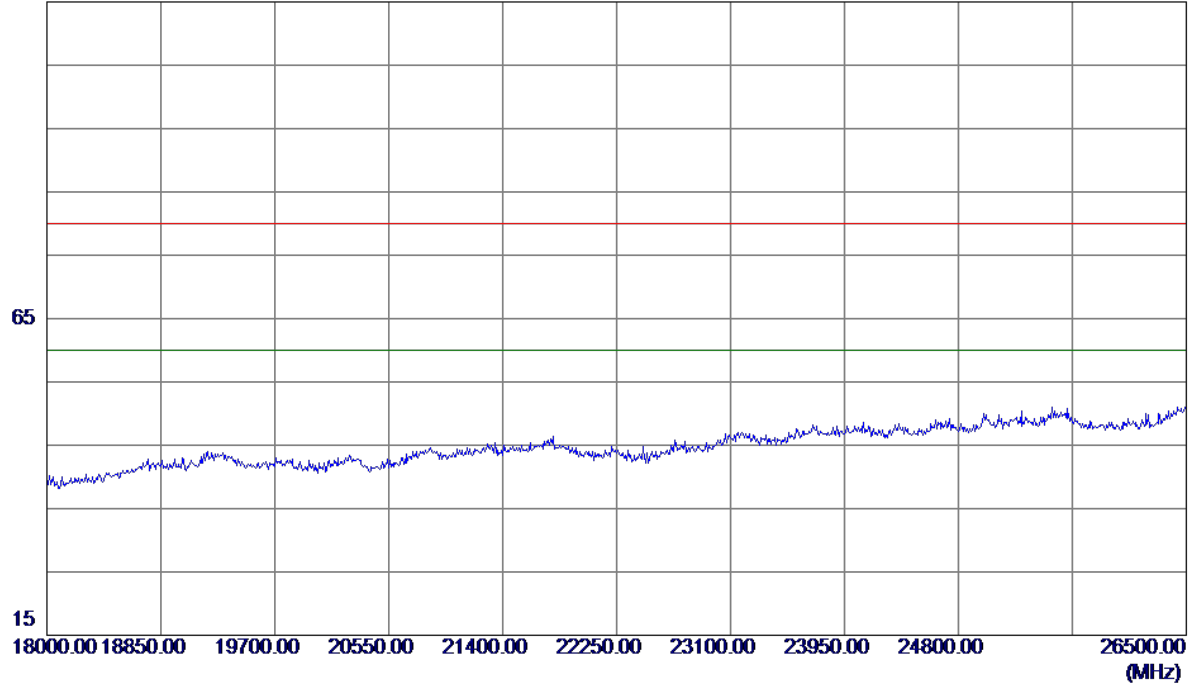

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

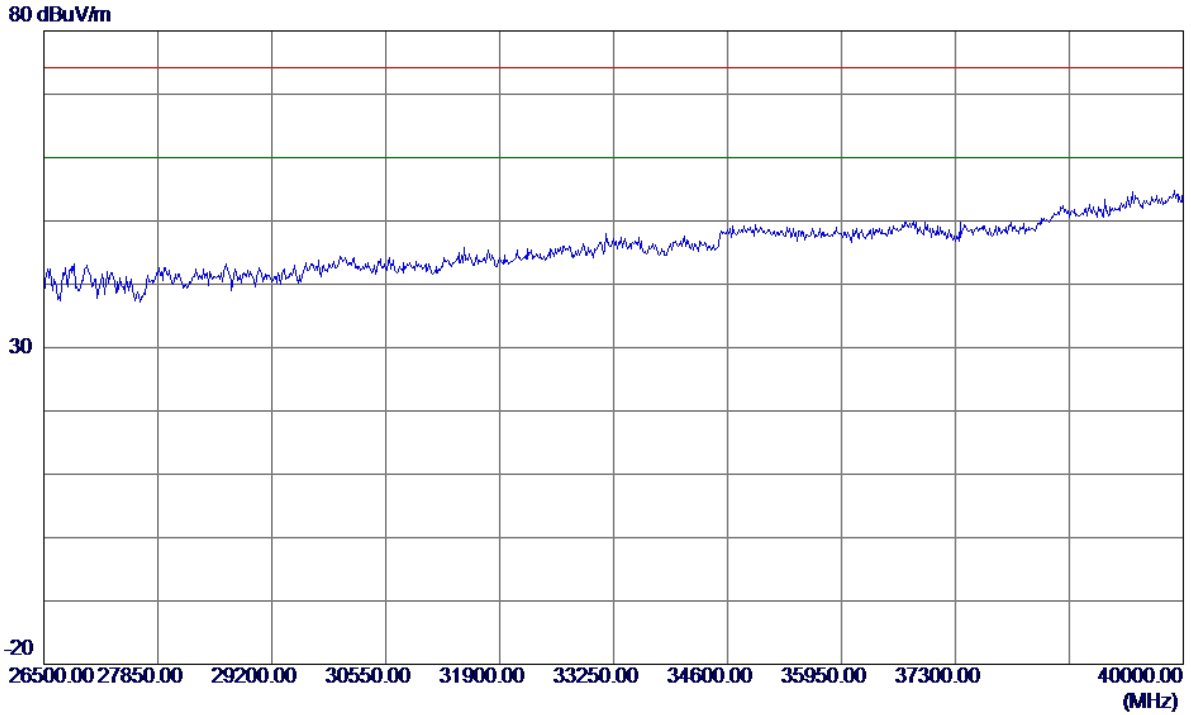


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

120 dBuV/m

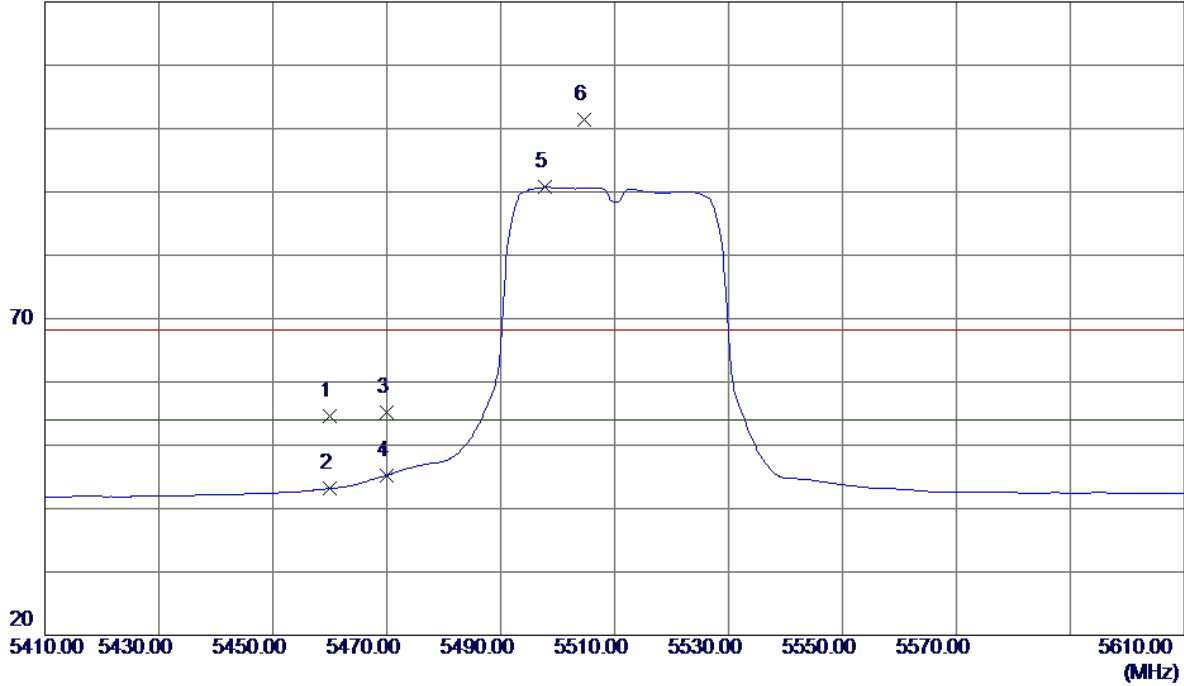


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	12.70	41.97	54.67	68.30	-13.63	Peak	
2	5460.0000	1.19	41.97	43.16	54.00	-10.84	AVG	
3	5470.0000	13.10	42.02	55.12	68.30	-13.18	Peak	
4	5470.0000	3.21	42.02	45.23	54.00	-8.77	AVG	
5 *	5497.8000	48.54	42.17	90.71	54.00	36.71	AVG	No Limit
6	5504.6000	59.26	42.20	101.46	68.30	33.16	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

120 dBuV/m

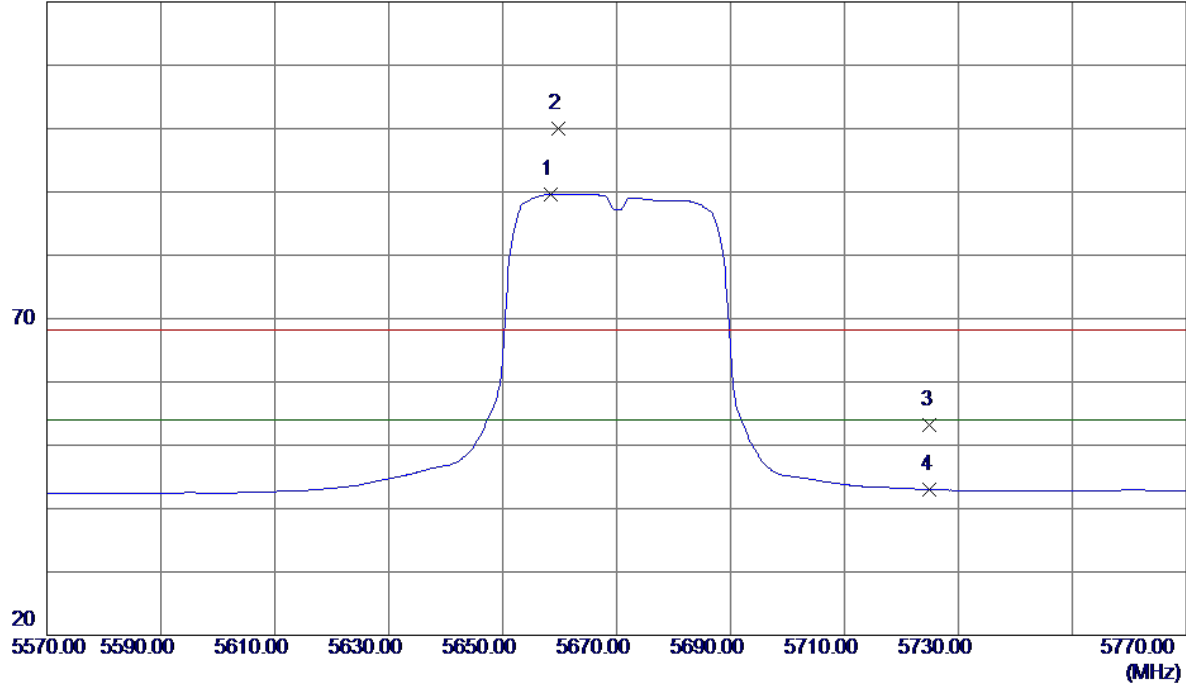


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5658.4000	46.88	42.71	89.59	54.00	35.59	AVG	No Limit
2	5659.8000	57.32	42.72	100.04	68.30	31.74	Peak	No Limit
3	5725.0000	10.25	42.94	53.19	68.30	-15.11	Peak	
4	5725.0000	0.05	42.94	42.99	54.00	-11.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

115 dBuV/m

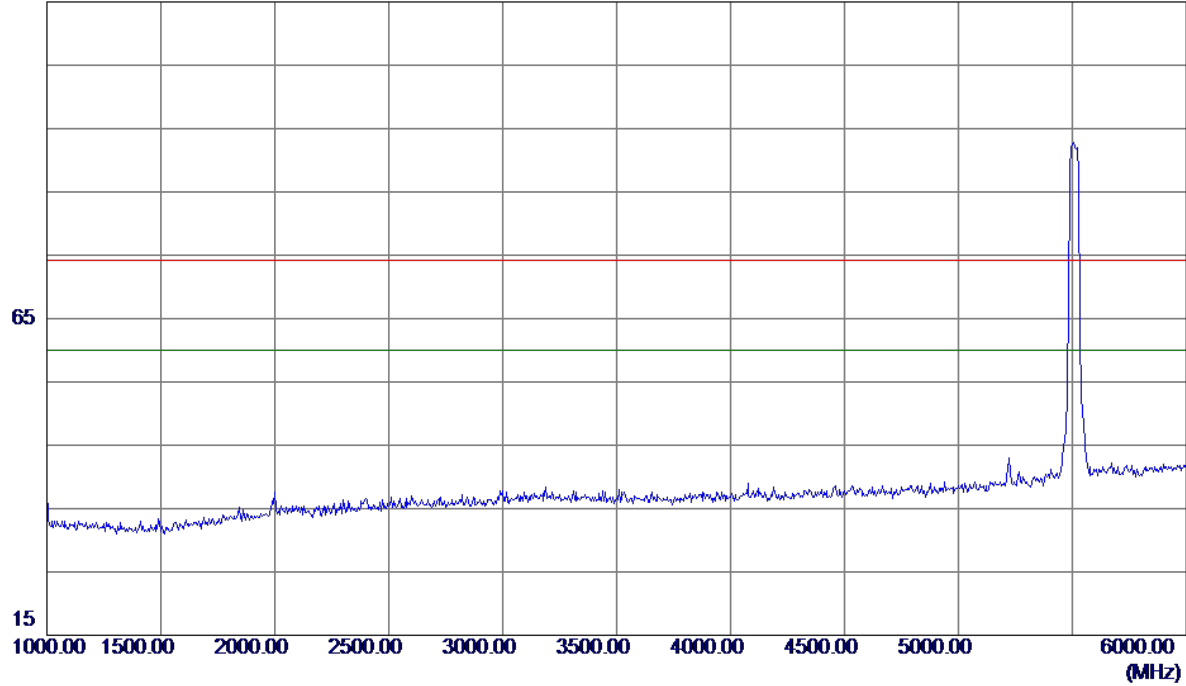


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

115 dBuV/m

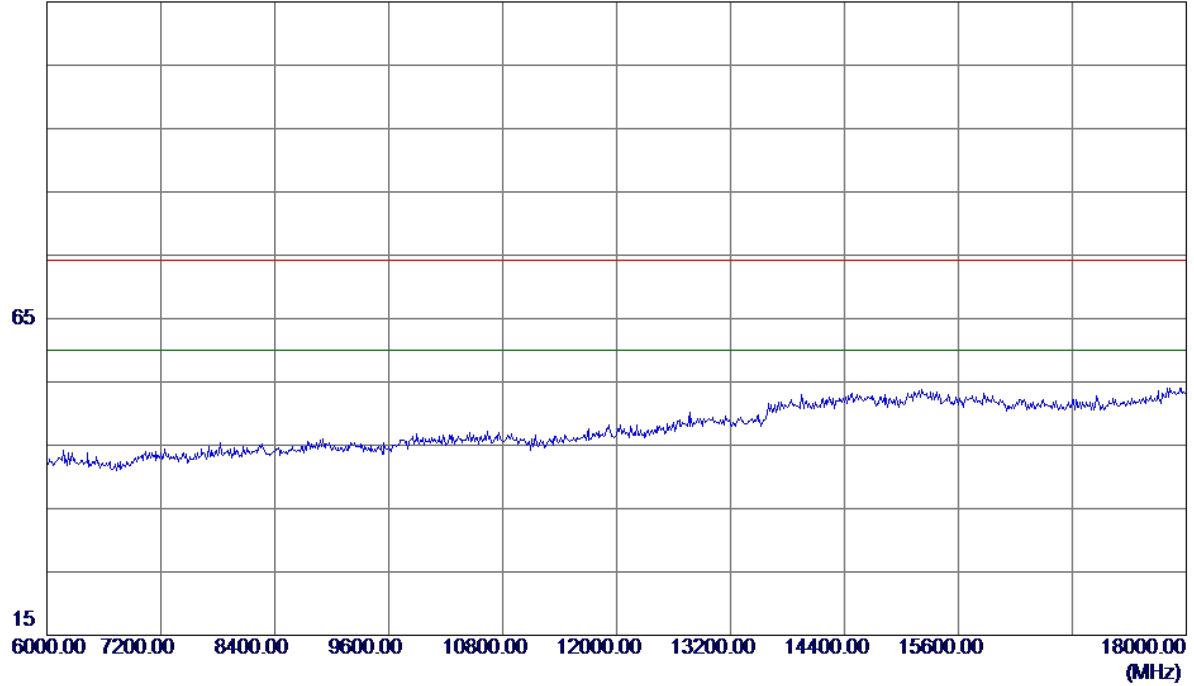


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical


115 dBuV/m

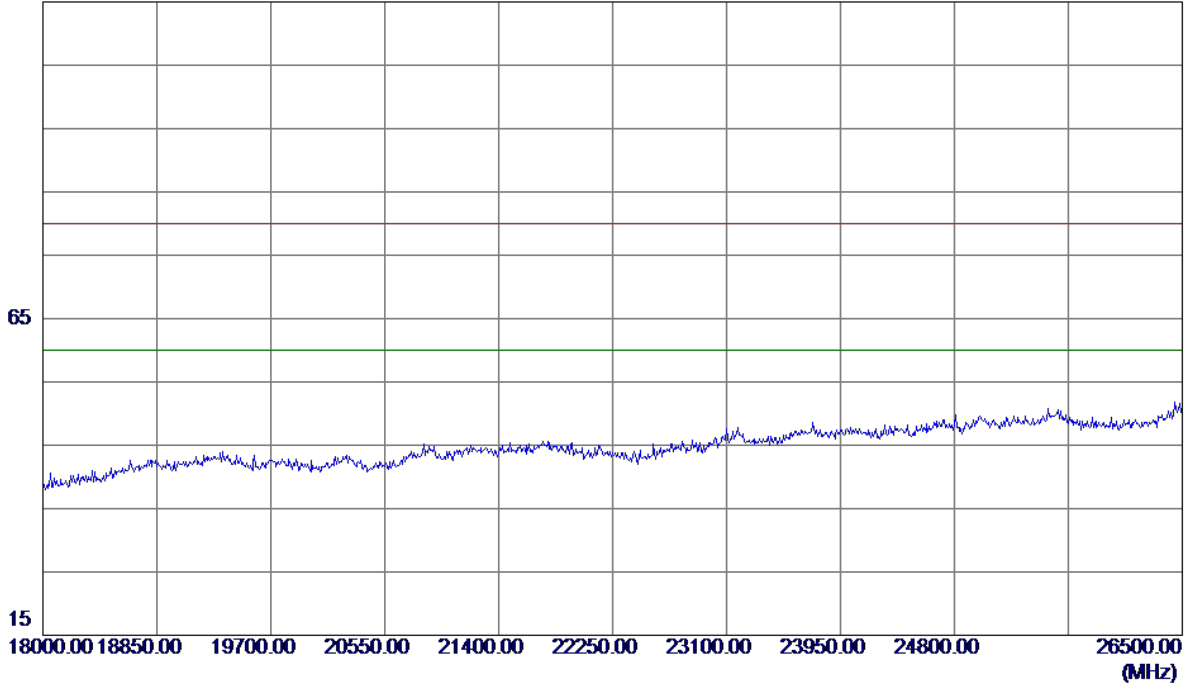

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

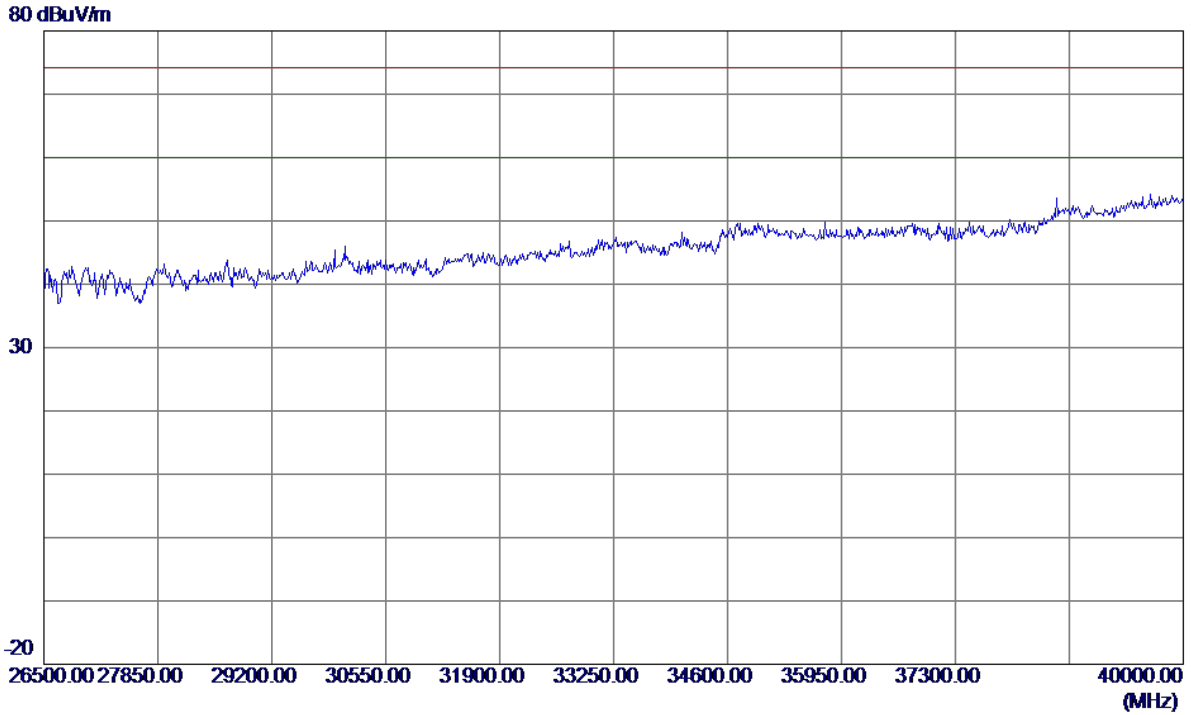


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

120 dBuV/m

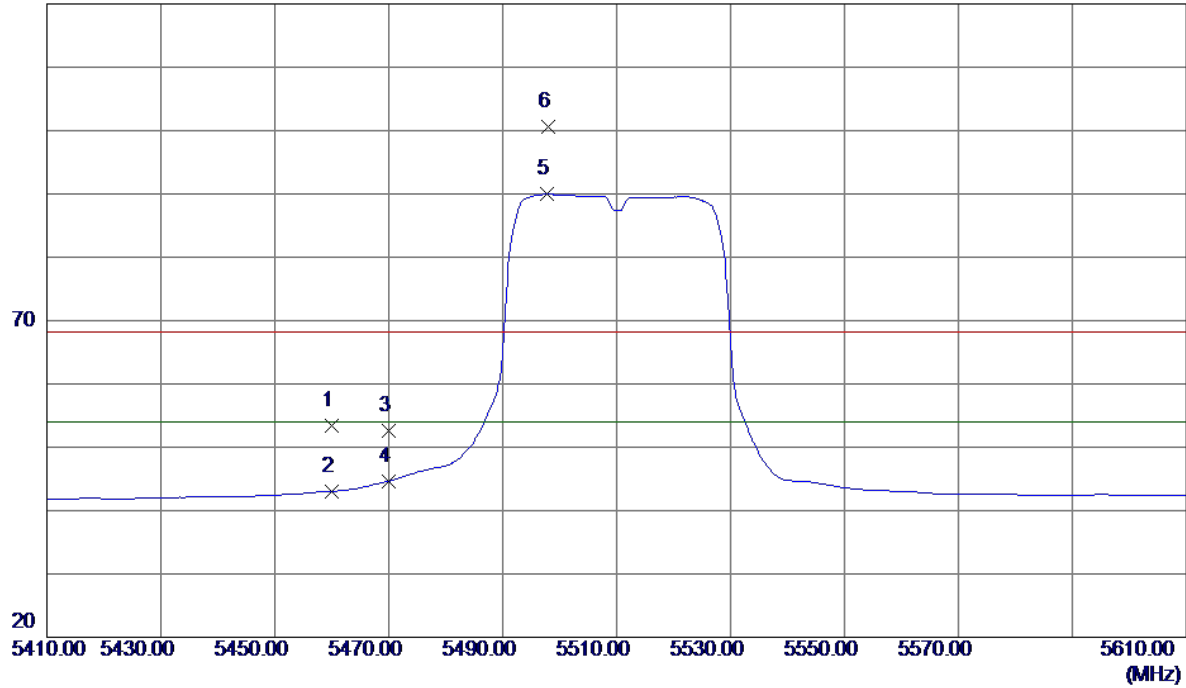


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	11.48	41.97	53.45	68.30	-14.85	Peak	
2	5460.0000	1.09	41.97	43.06	54.00	-10.94	AVG	
3	5470.0000	10.50	42.02	52.52	68.30	-15.78	Peak	
4	5470.0000	2.61	42.02	44.63	54.00	-9.37	AVG	
5 *	5497.8000	47.80	42.17	89.97	54.00	35.97	AVG	No Limit
6	5498.0000	58.41	42.17	100.58	68.30	32.28	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

115 dBuV/m

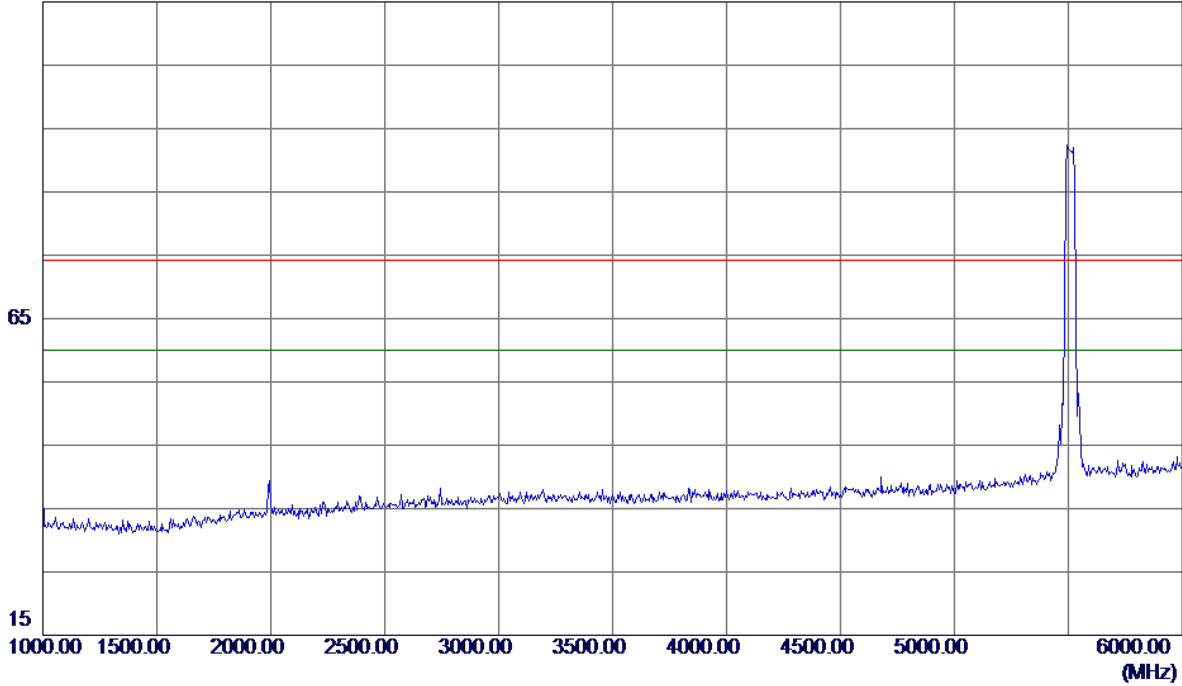


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

115 dBuV/m

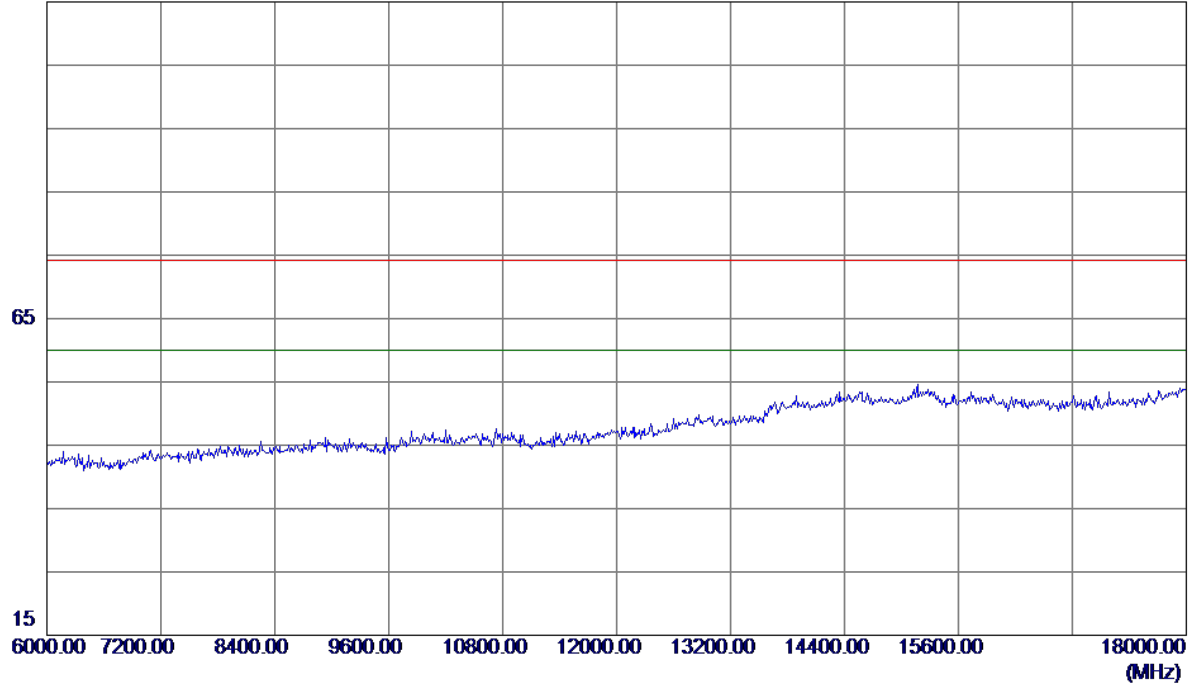


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal


115 dBuV/m

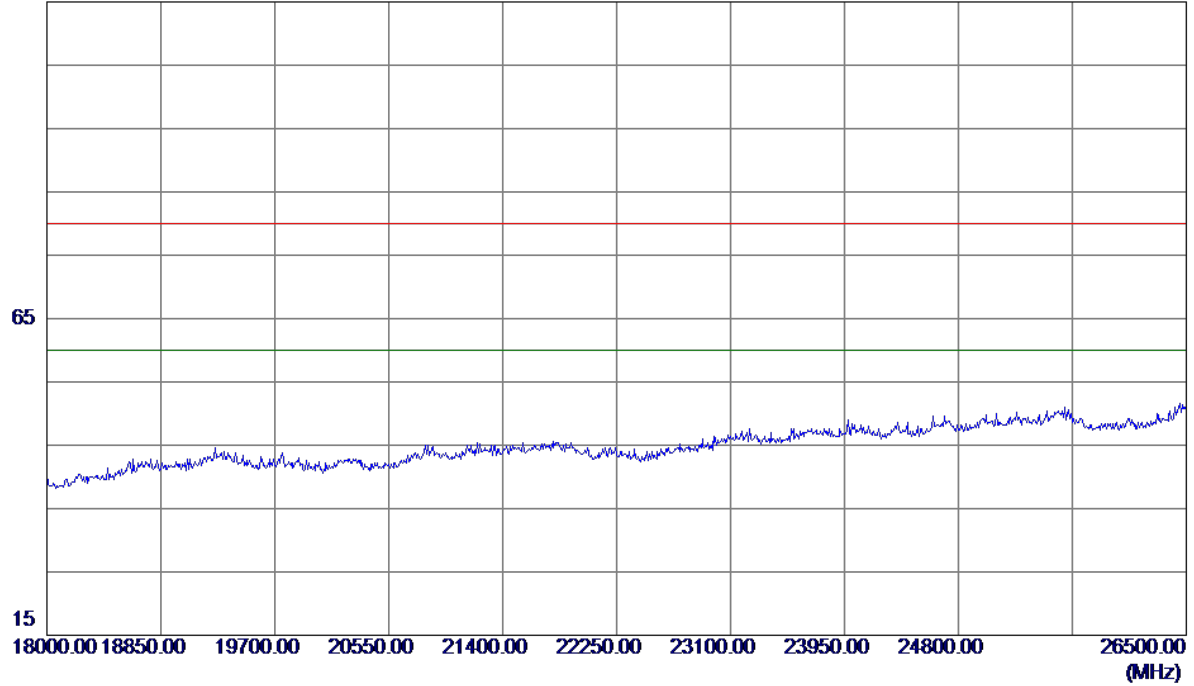

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

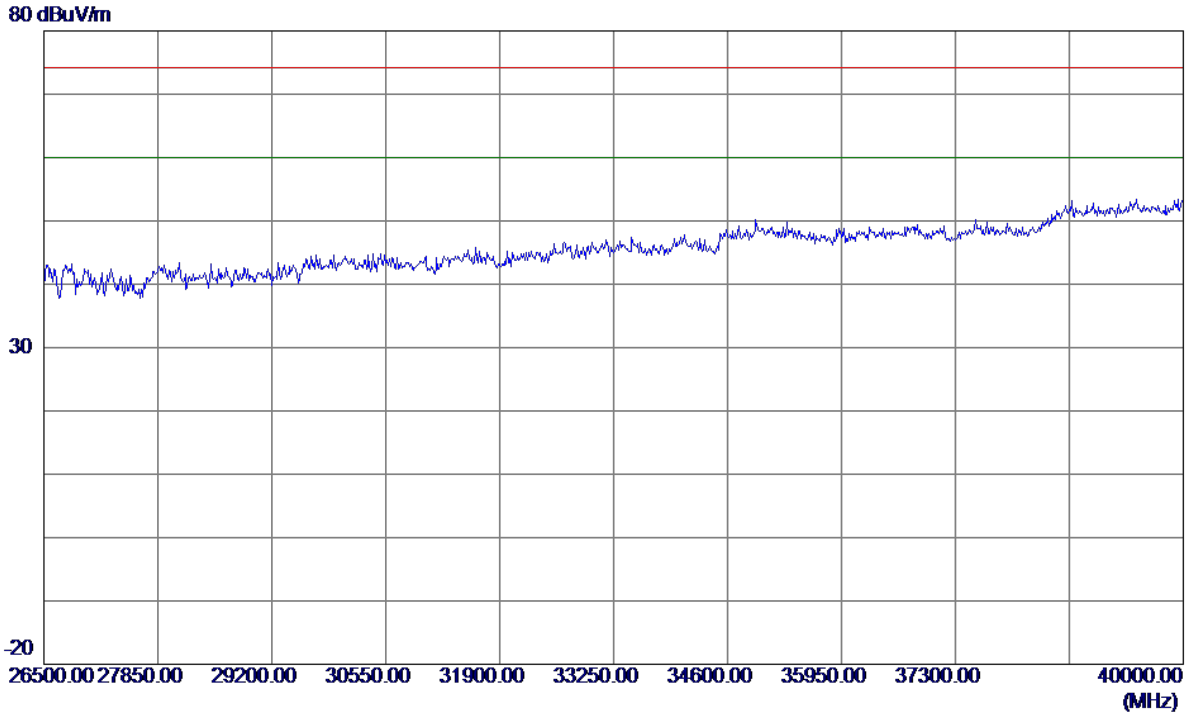


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

115 dBuV/m

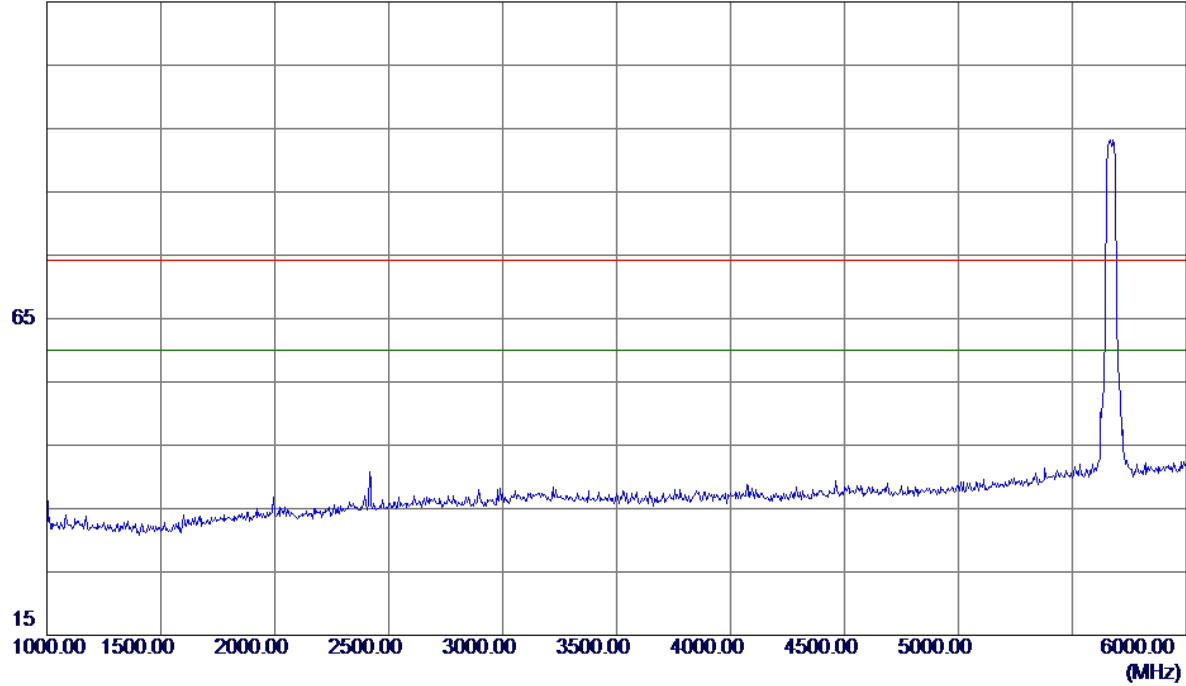


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

115 dBuV/m

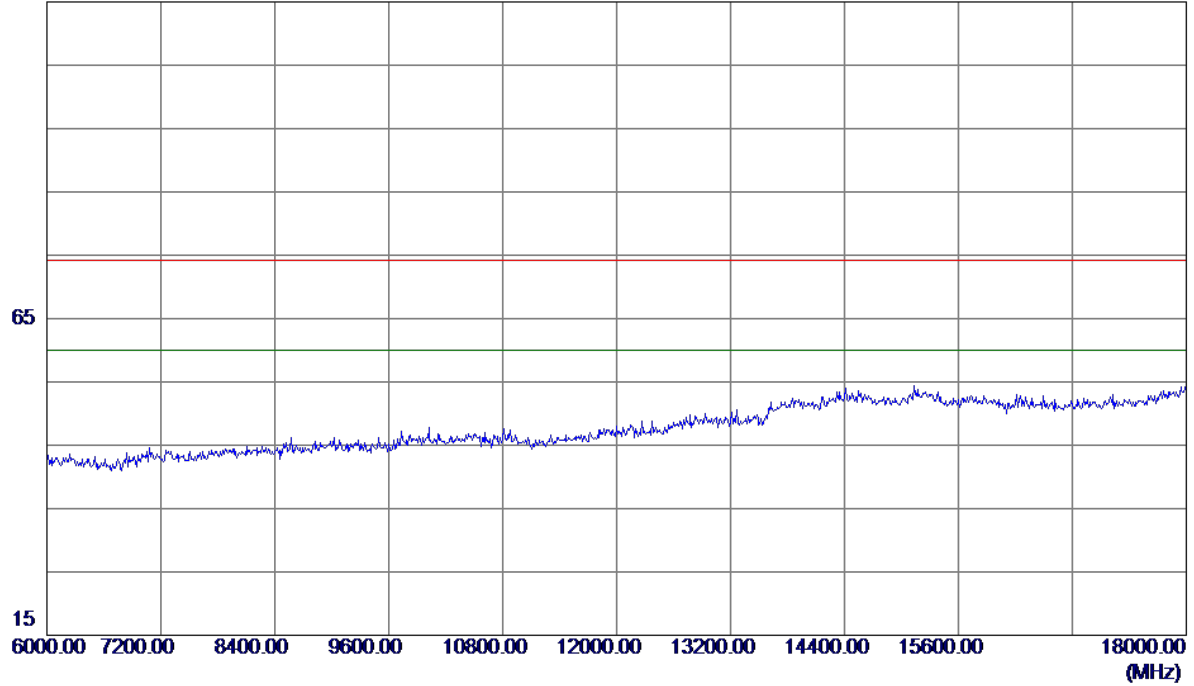


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical


115 dBuV/m

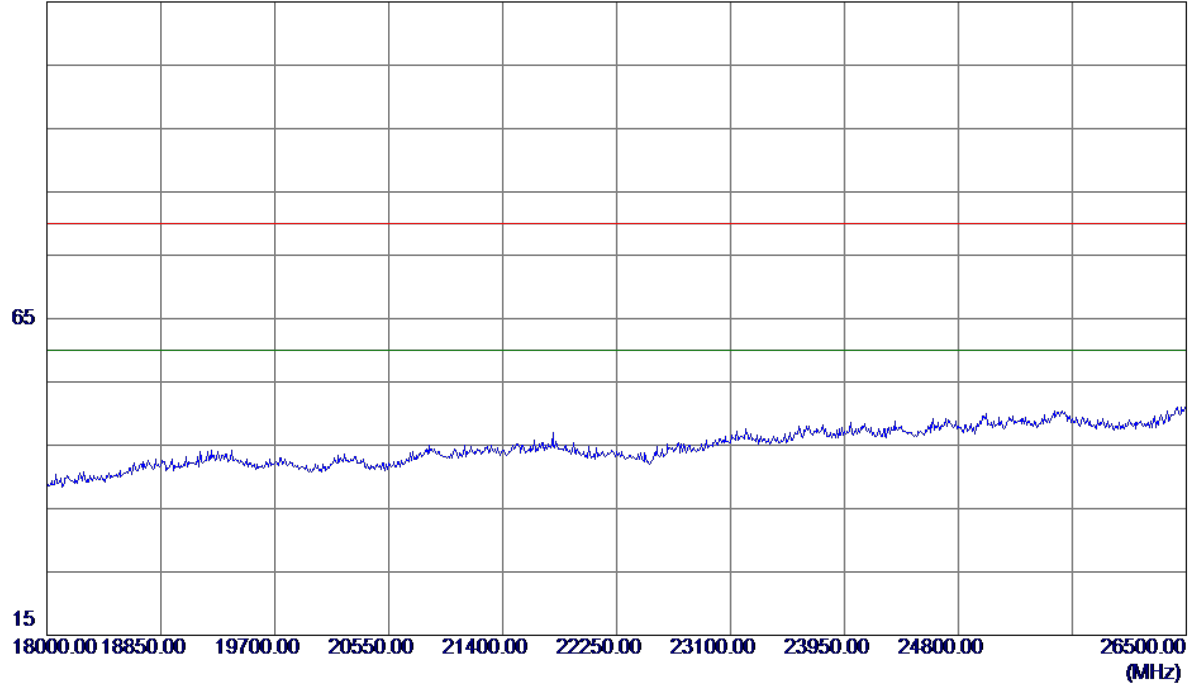

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Vertical

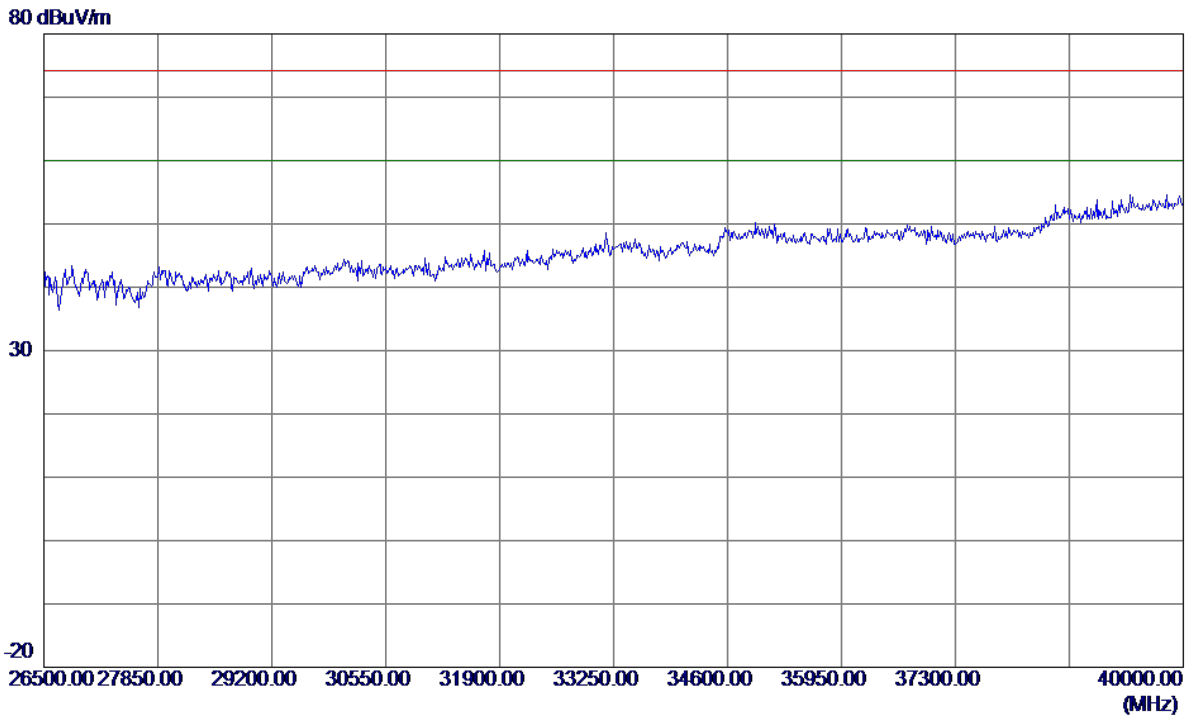

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

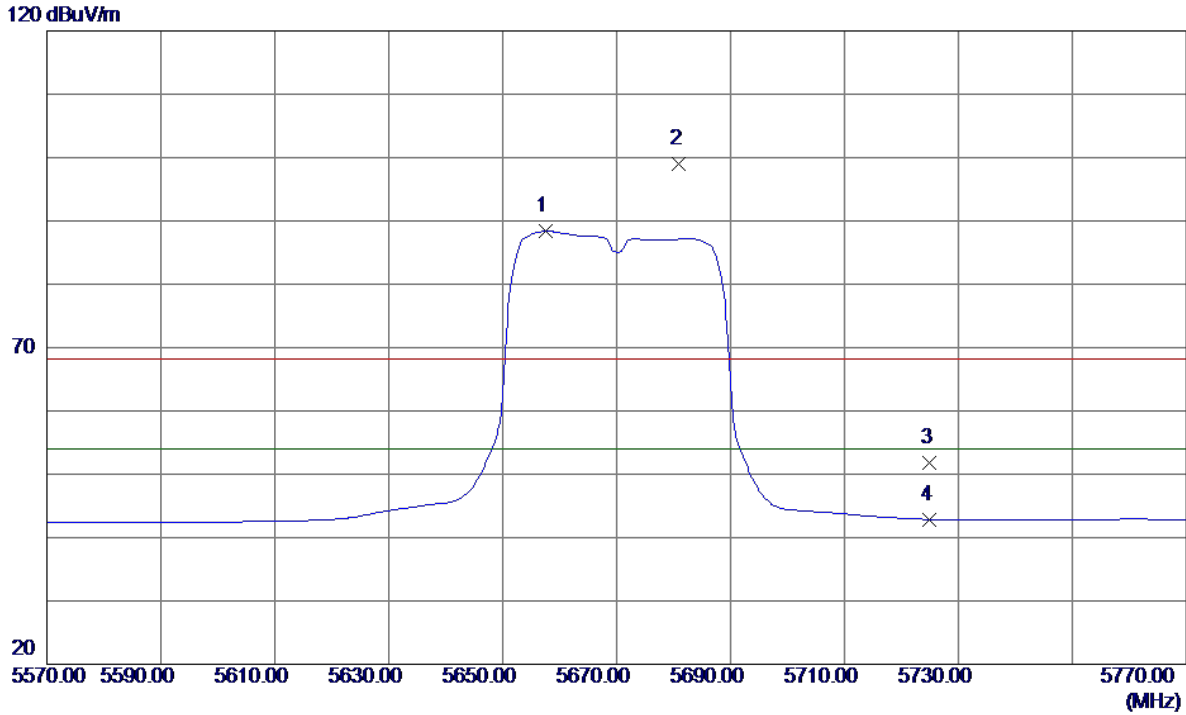


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5657.6000	45.69	42.71	88.40	54.00	34.40	AVG	No Limit
2	5681.0000	56.30	42.79	99.09	68.30	30.79	Peak	No Limit
3	5725.0000	8.89	42.94	51.83	68.30	-16.47	Peak	
4	5725.0000	-0.06	42.94	42.88	54.00	-11.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

115 dBuV/m

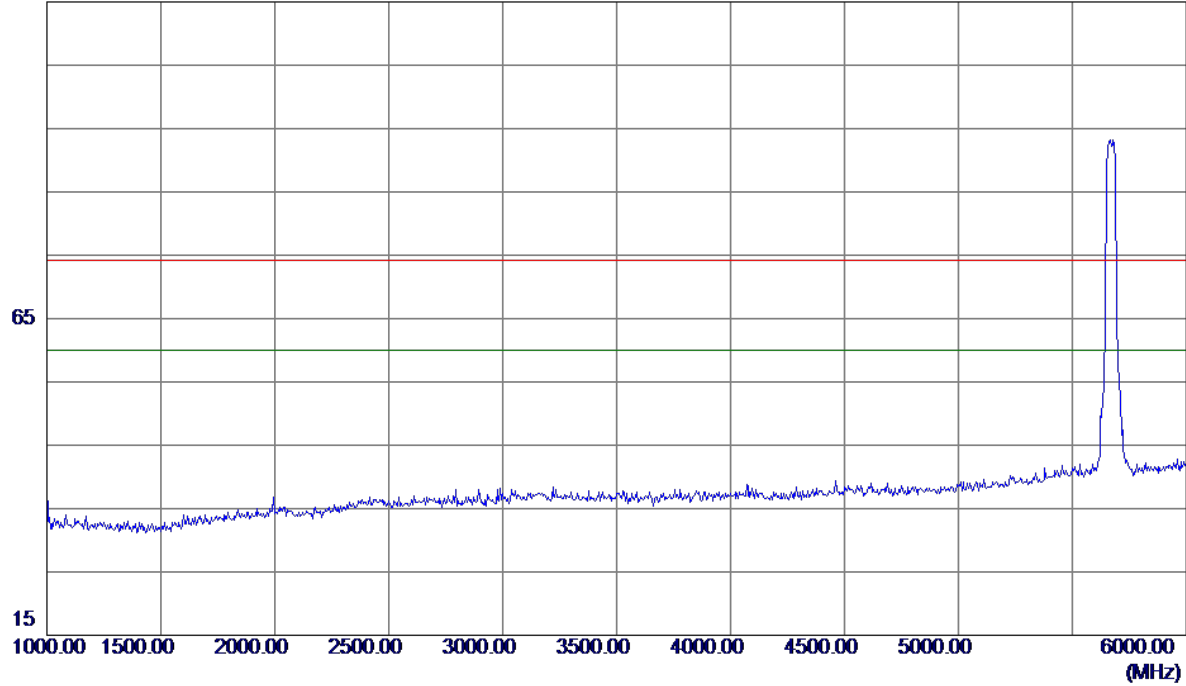


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

115 dBuV/m

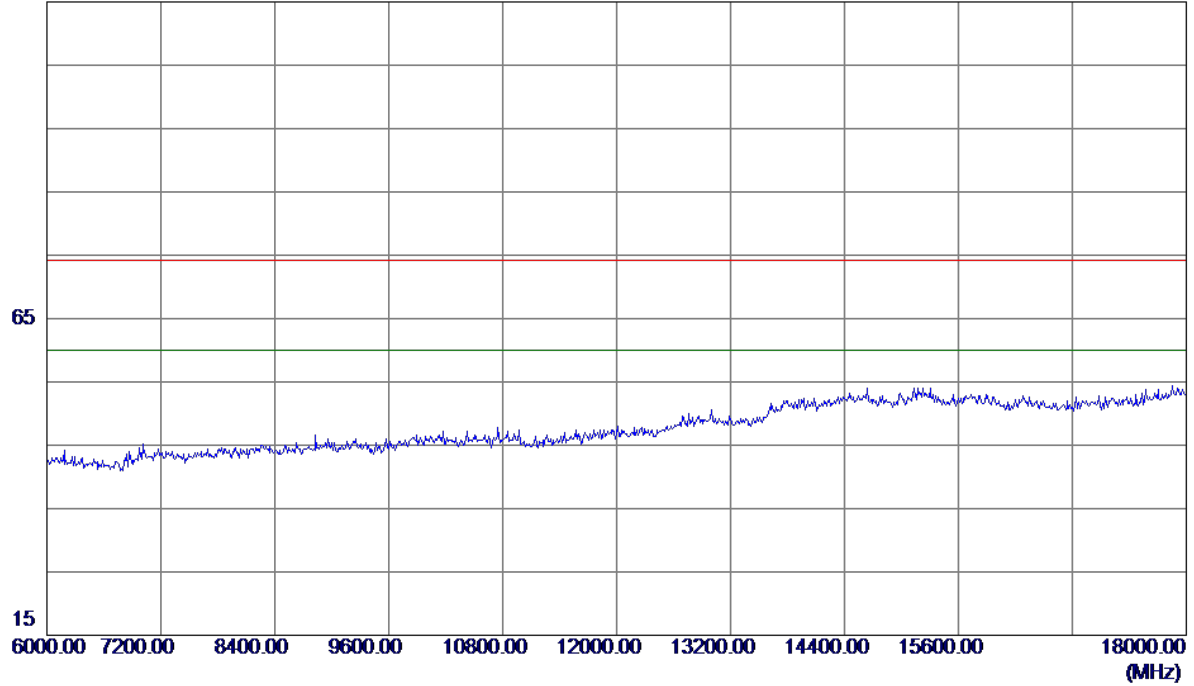

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment