



**TX CH40**

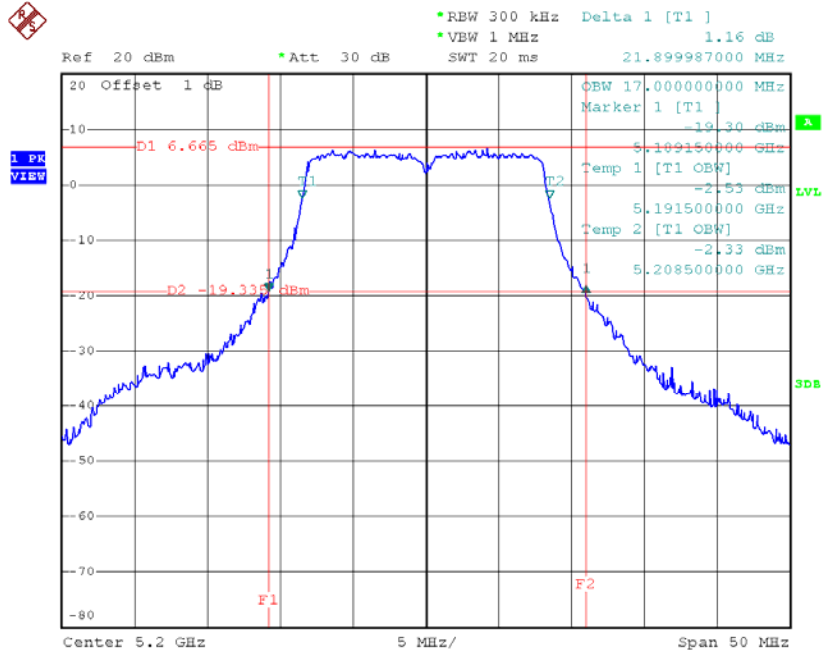

Date: 1.APR.2015 15:25:35

**TX CH48**

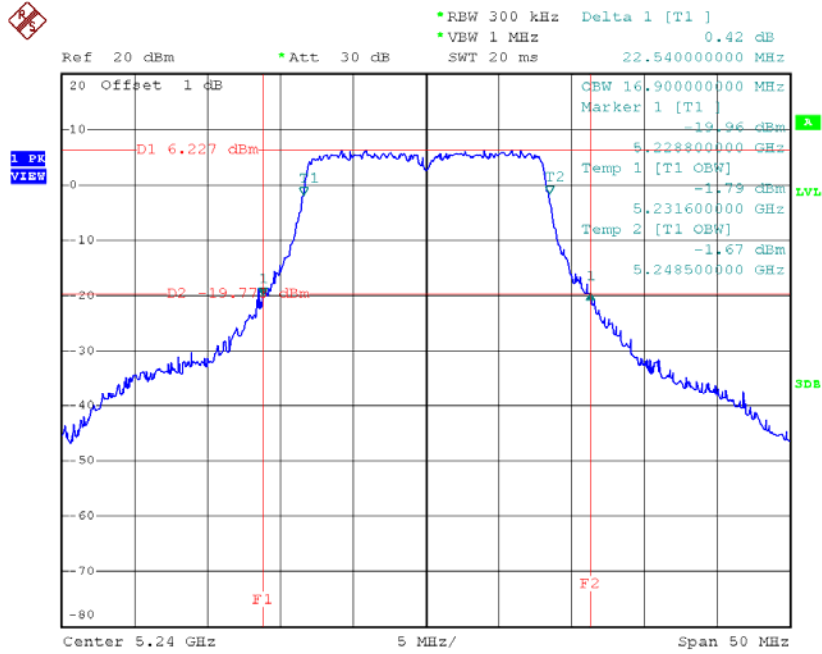


Date: 1.APR.2015 15:26:29

**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.99	18.00
CH40	5200	22.65	18.00
CH48	5240	23.85	18.00

**TX CH36**

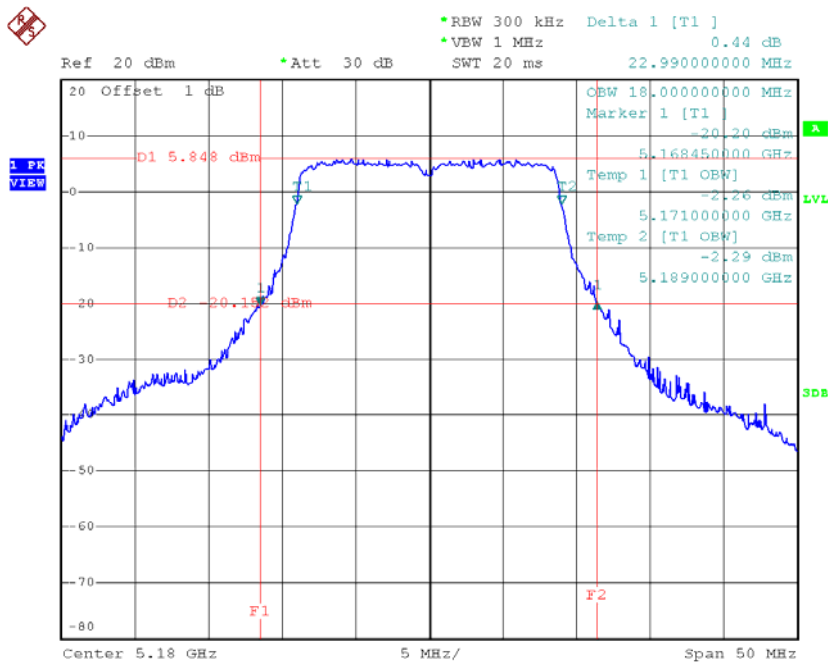


Date: 1.APR.2015 15:49:32

**TX CH40**

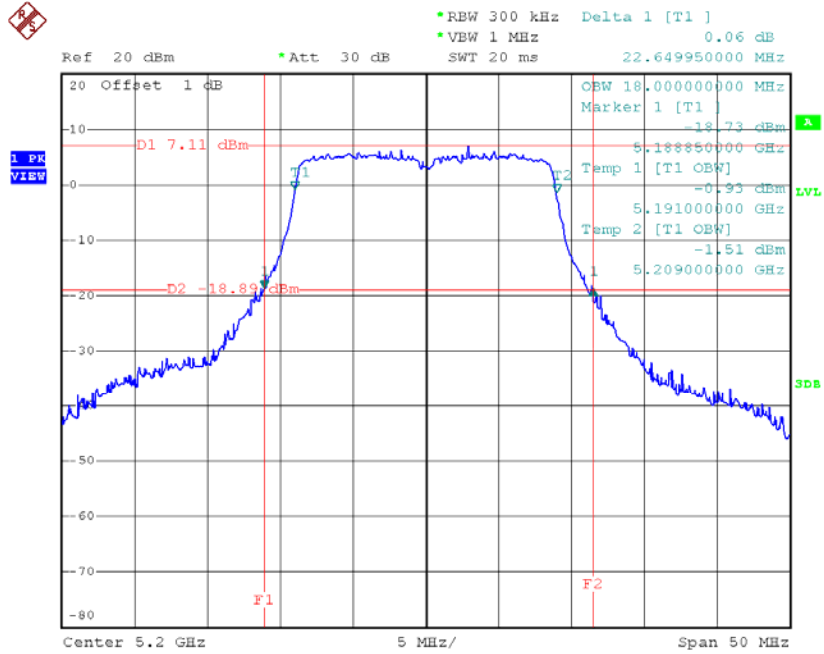

Date: 1.APR.2015 15:50:40

**TX CH48**

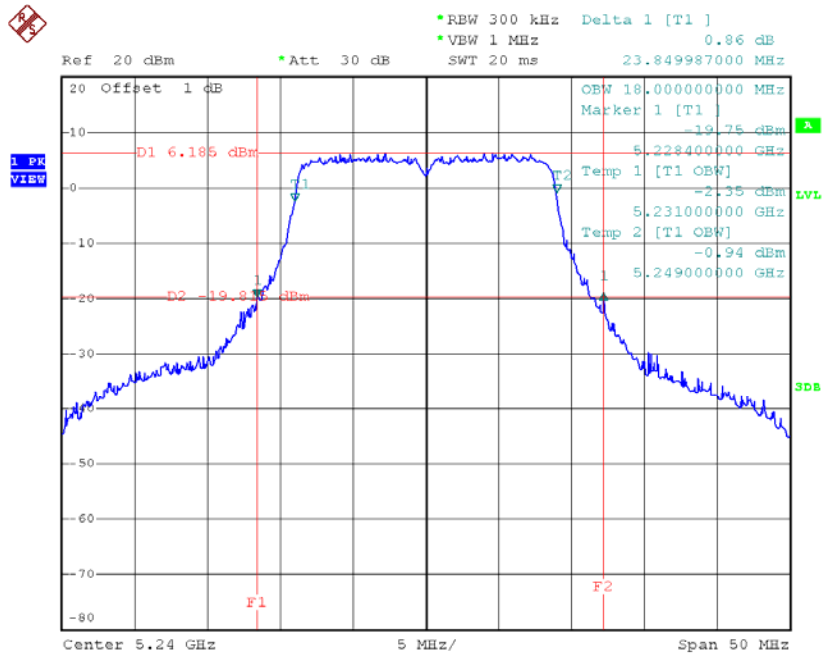


Date: 1.APR.2015 15:51:19

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	43.50	36.40
CH46	5230	43.41	36.40

### TX CH38

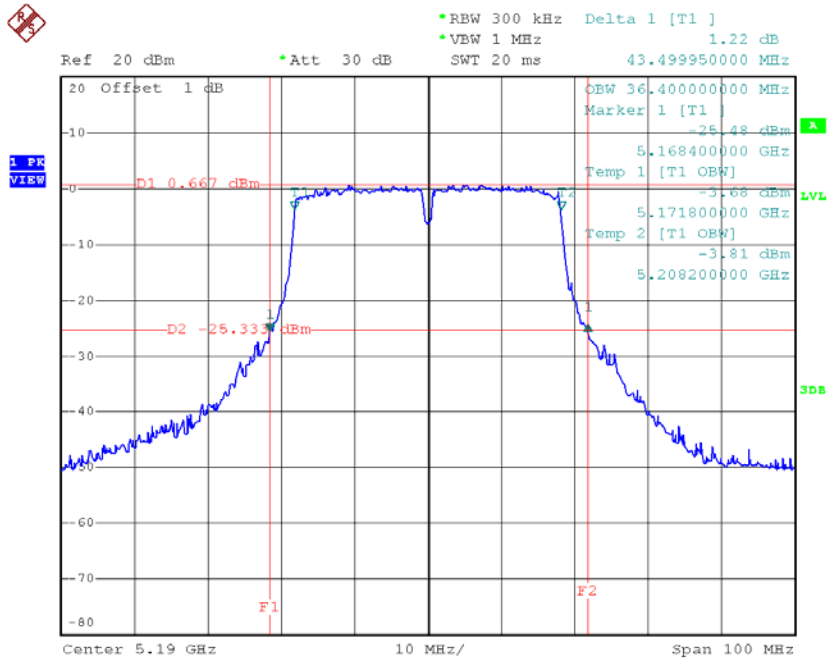

Date: 1.APR.2015 19:38:49

### TX CH46

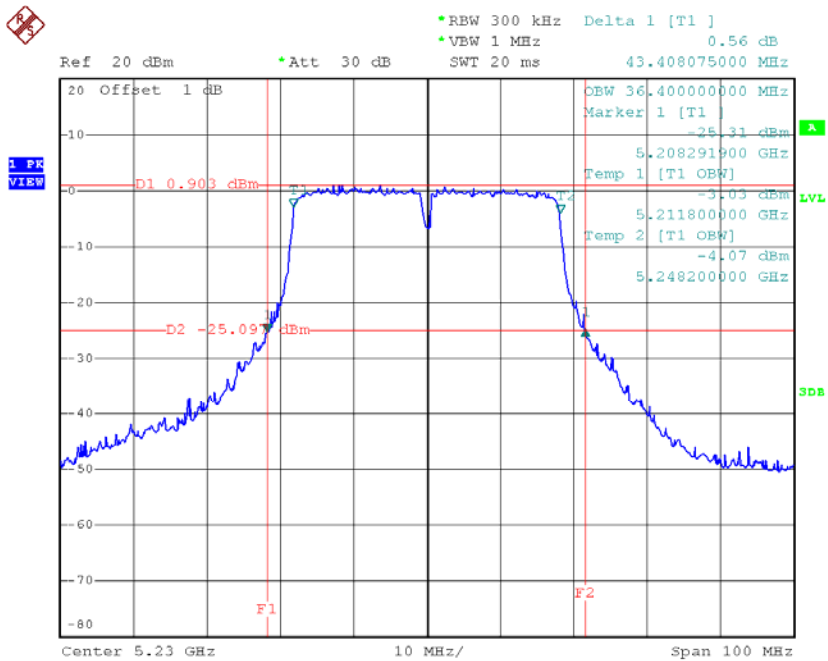


Date: 1.APR.2015 19:41:14

**Test Mode: UNII-2A/TX A Mode\_CH52/CH60/CH64**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.00	16.80
CH60	5300	22.05	16.90
CH64	5320	22.00	16.90

**TX CH52**

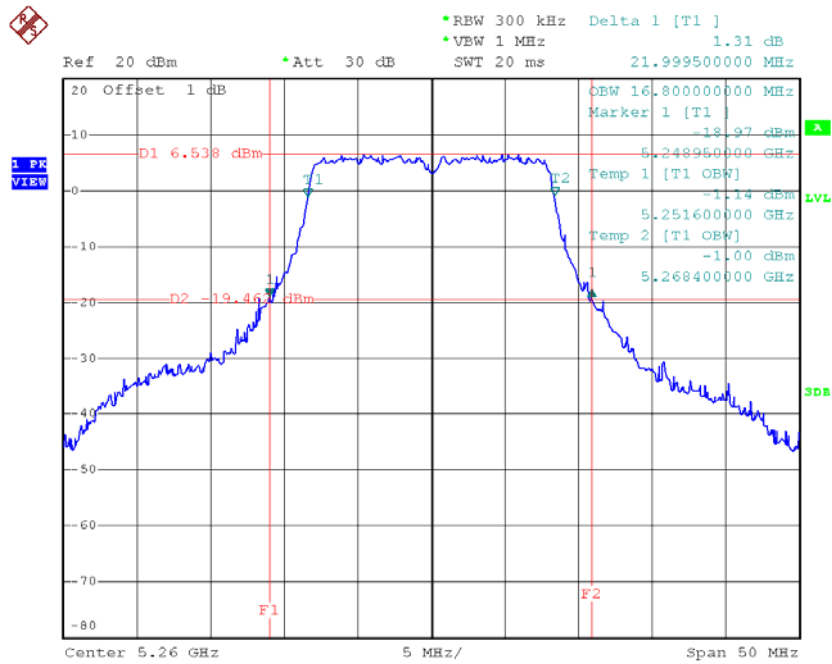


Date: 1.APR.2015 15:27:28

### TX CH60

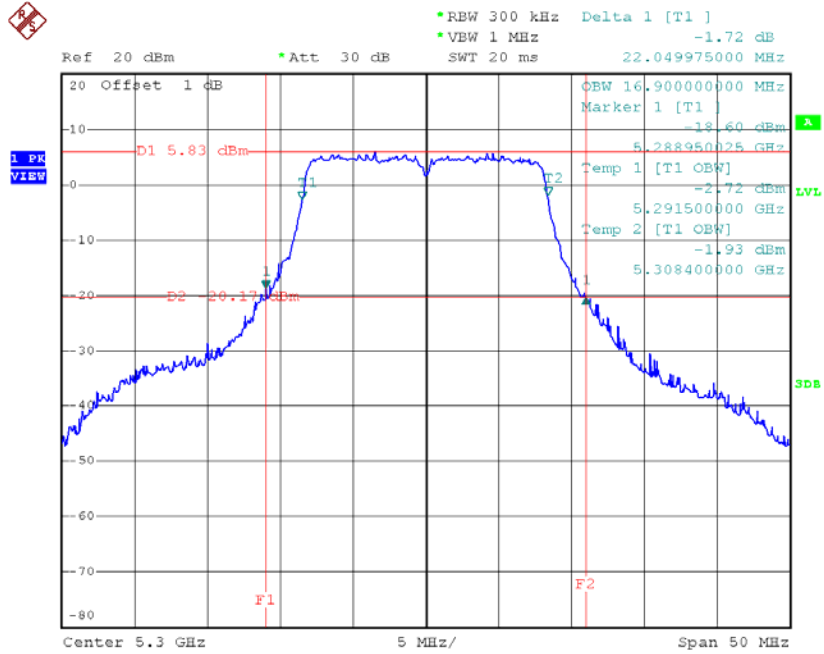

Date: 1.APR.2015 15:29:26

### TX CH64

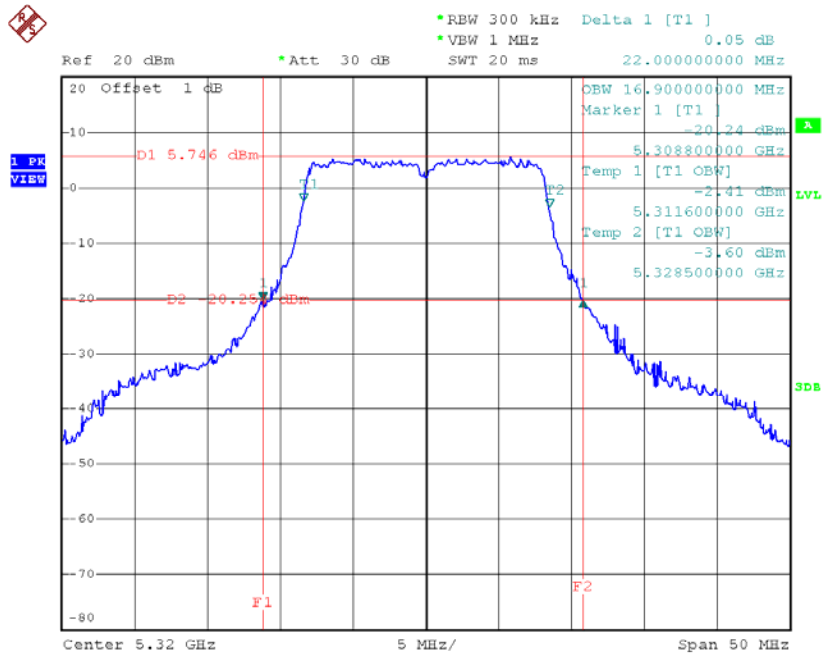


Date: 1.APR.2015 15:30:11

**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.15	18.00
CH60	5300	23.30	18.00
CH64	5320	22.89	18.00

**TX CH52**

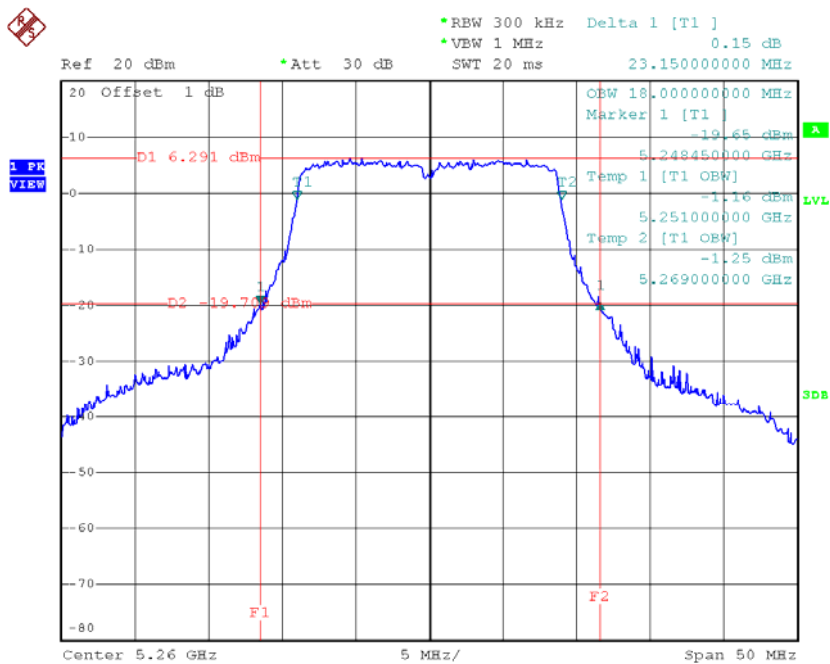


Date: 1.APR.2015 15:52:02

**TX CH60**

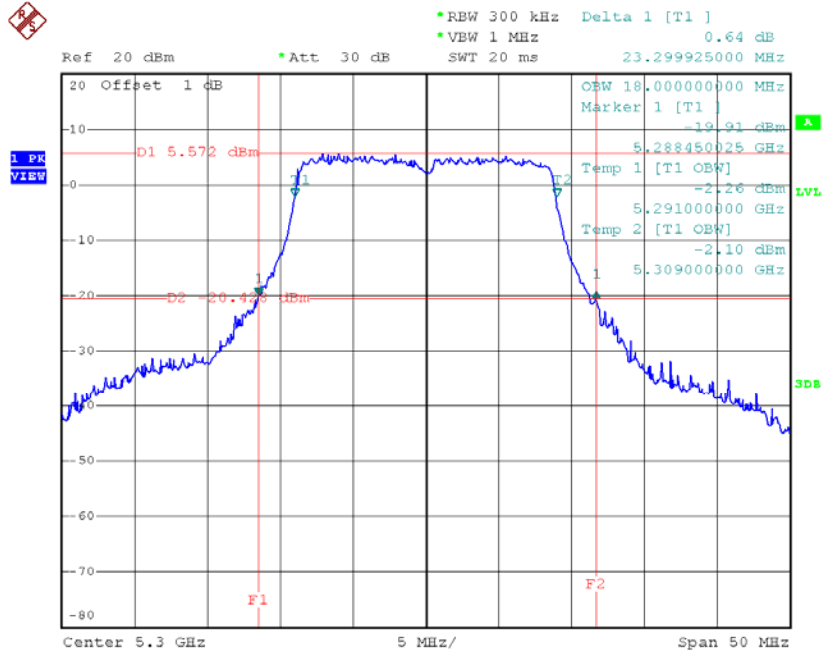

Date: 1.APR.2015 15:53:00

**TX CH64**

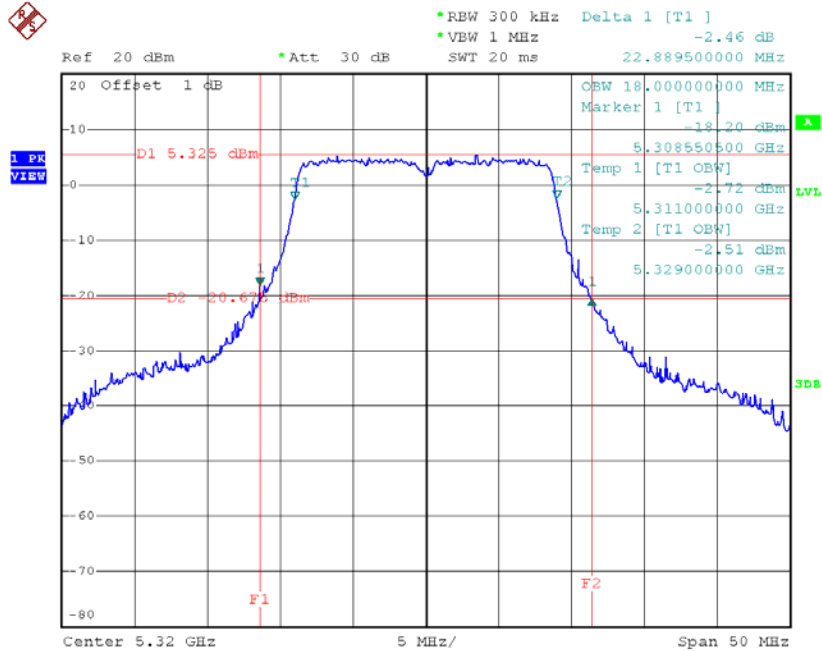


Date: 1.APR.2015 15:53:36

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	42.70	36.40
CH62	5310	42.70	36.40

### TX CH54

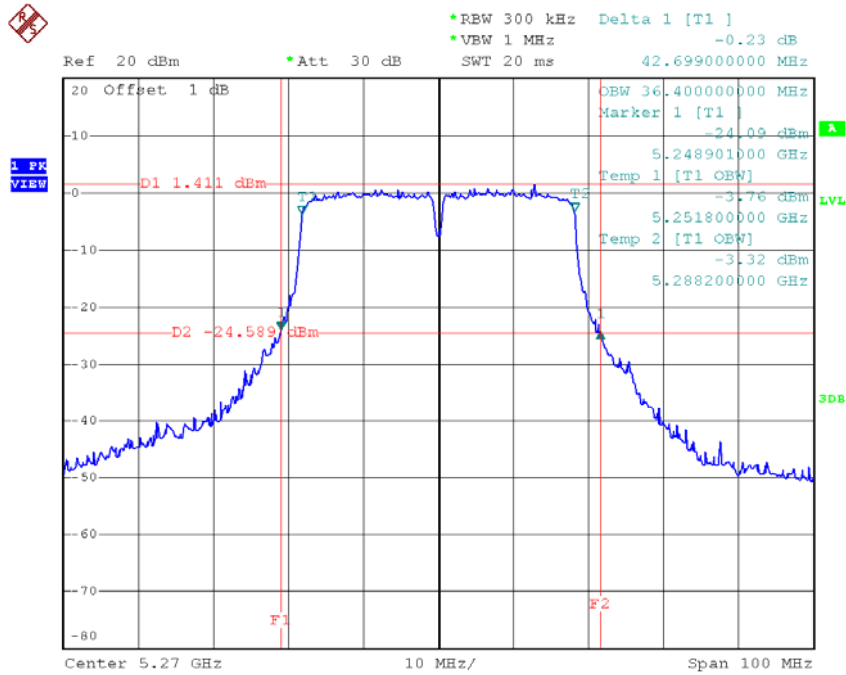

Date: 1.APR.2015 19:41:56

### TX CH62

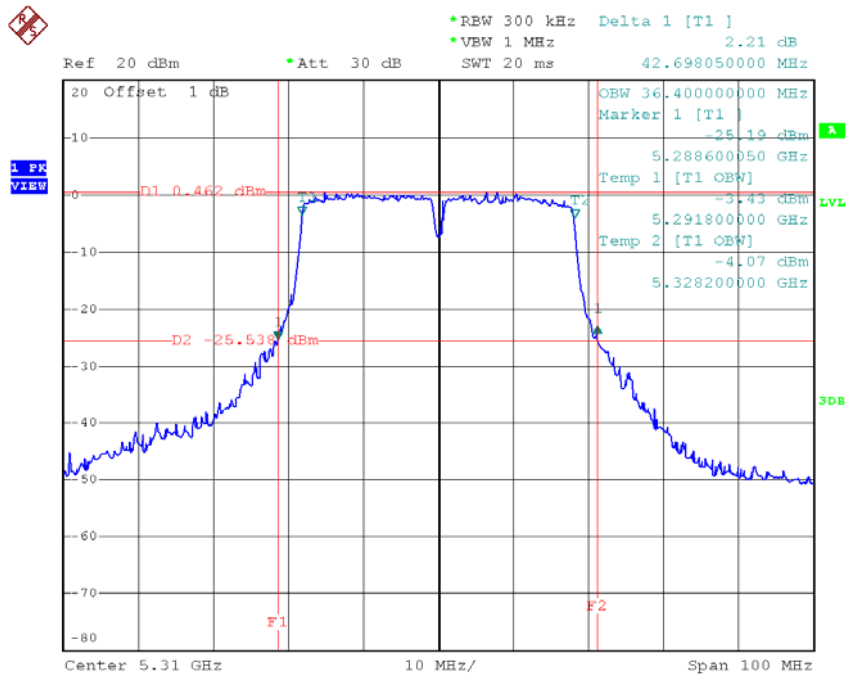


Date: 1.APR.2015 19:42:48

**Test Mode: UNII-2C/TX A Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.20	16.90
CH116	5580	22.15	17.00
CH140	5700	22.65	17.00

**TX CH100**

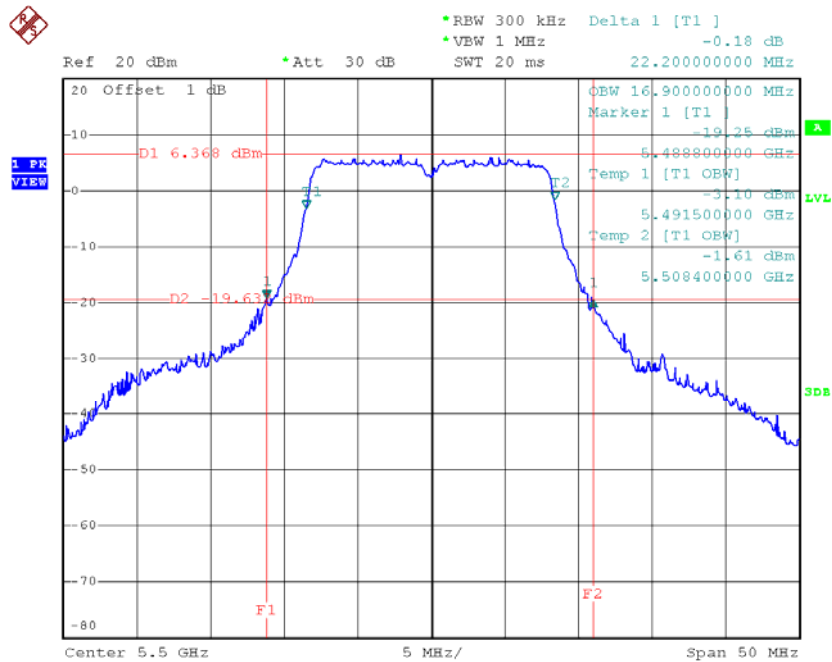


Date: 1.APR.2015 15:31:01

**TX CH116**

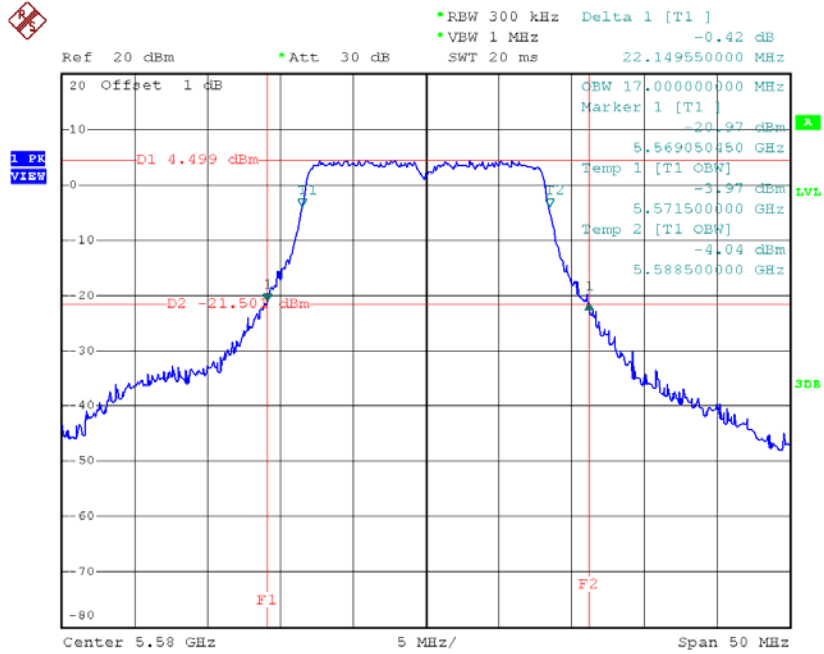

Date: 1.APR.2015 15:32:36

**TX CH140**

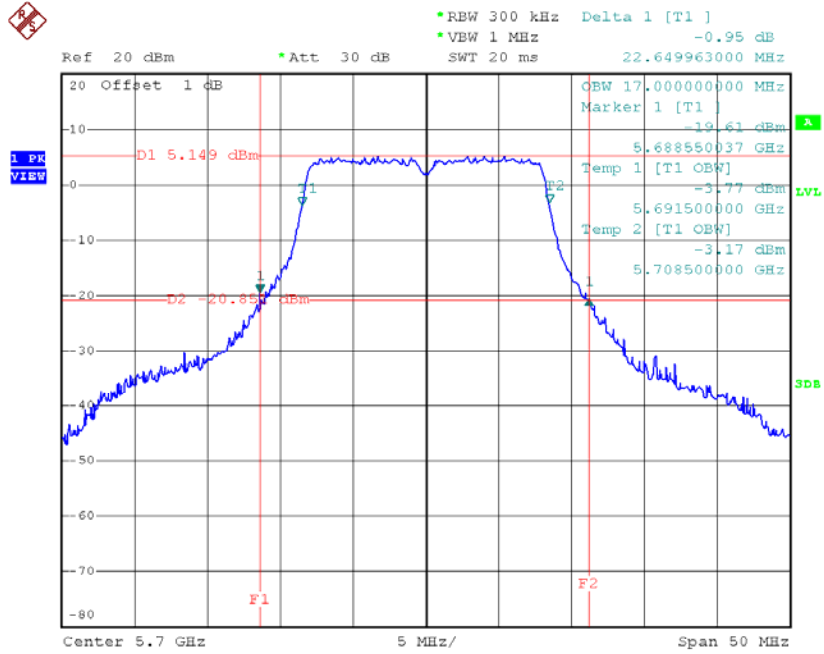


Date: 1.APR.2015 15:33:28

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.25	18.00
CH116	5580	23.00	18.00
CH140	5700	23.50	18.00

**TX CH100**

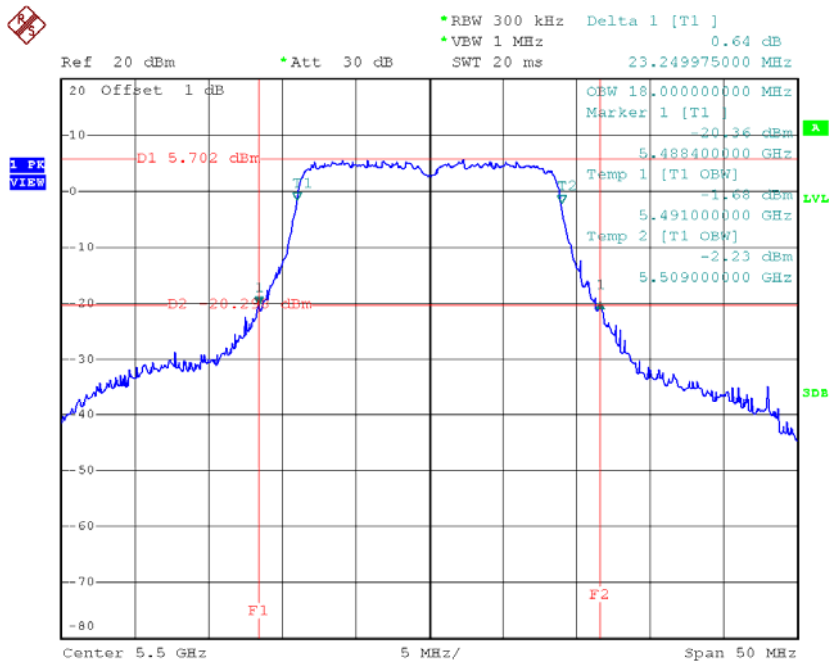


Date: 1.APR.2015 15:54:13

**TX CH116**

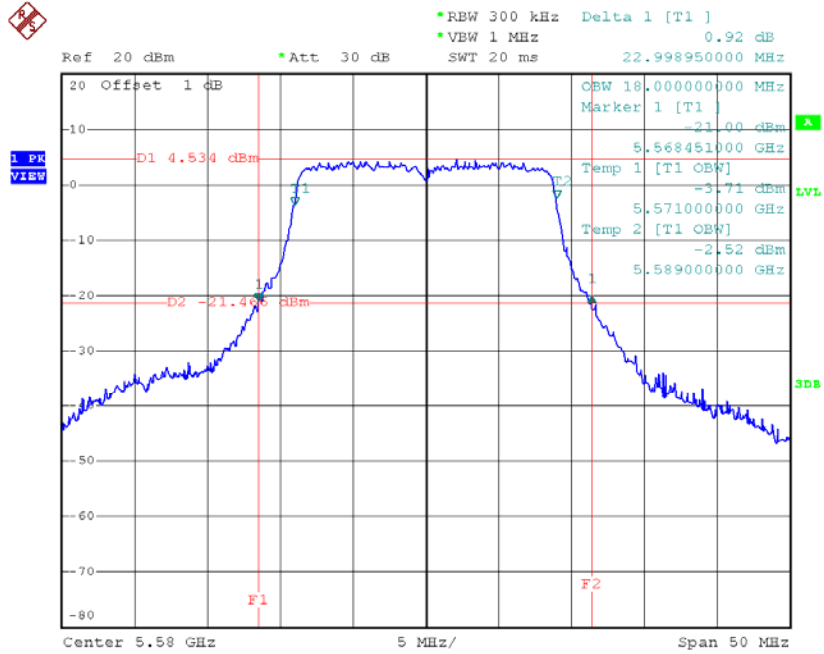

Date: 1.APR.2015 15:55:13

**TX CH140**

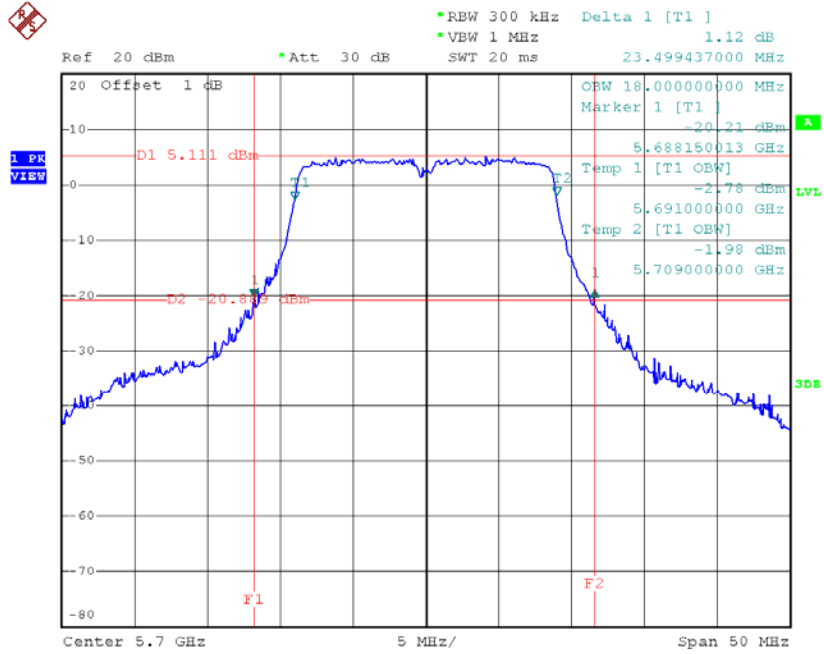


Date: 1.APR.2015 15:55:44

**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	43.40	36.40
CH110	5550	42.99	36.40
CH134	5670	43.41	36.40

**TX CH102**

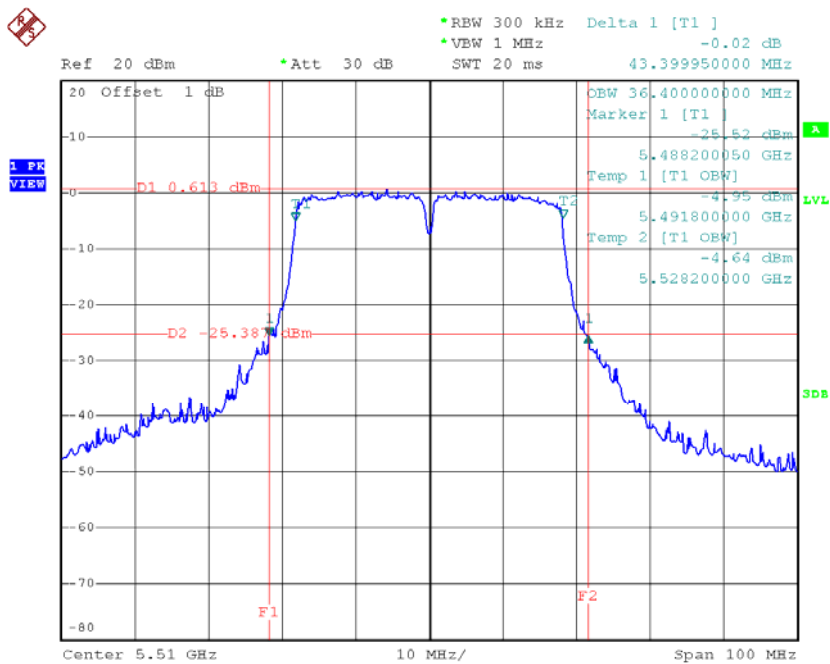


Date: 1.APR.2015 19:43:31

### TX CH110

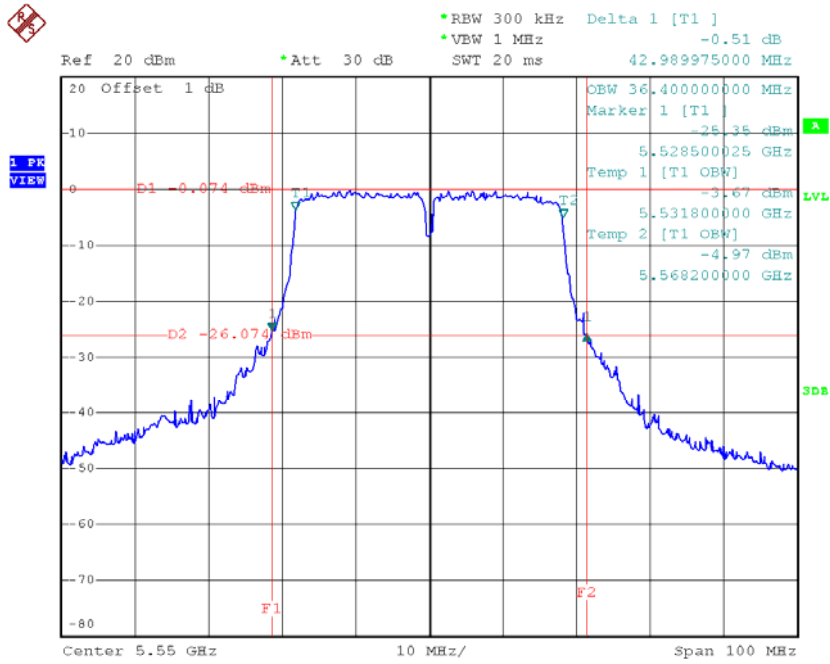

Date: 1.APR.2015 19:45:13

### TX CH134

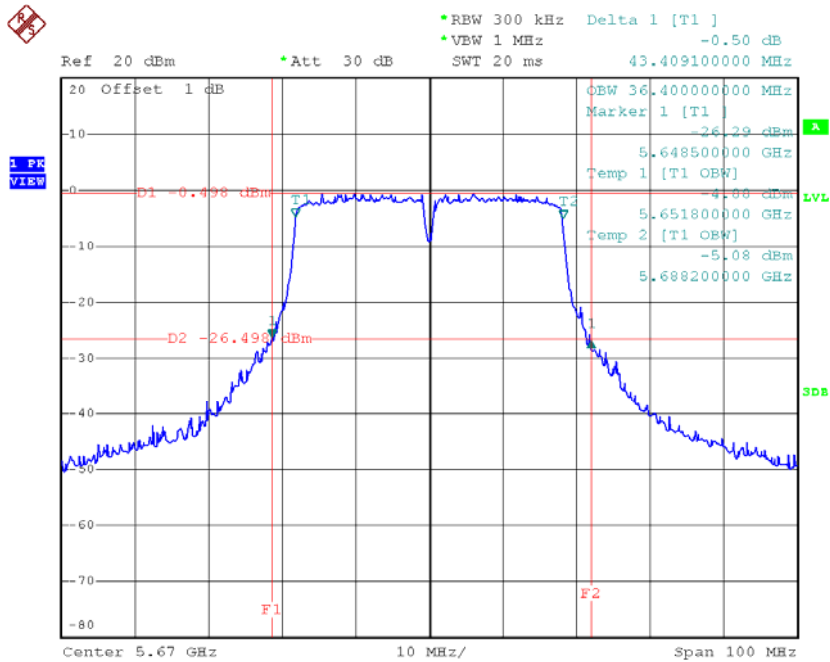


Date: 1.APR.2015 19:45:45

**Test Mode: UNII-3/ TX A Mode\_CH149/CH157/CH165**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.55	17.00	>=500
CH157	5785	16.45	17.00	>=500
CH165	5825	16.55	17.00	>=500

**TX CH 149**

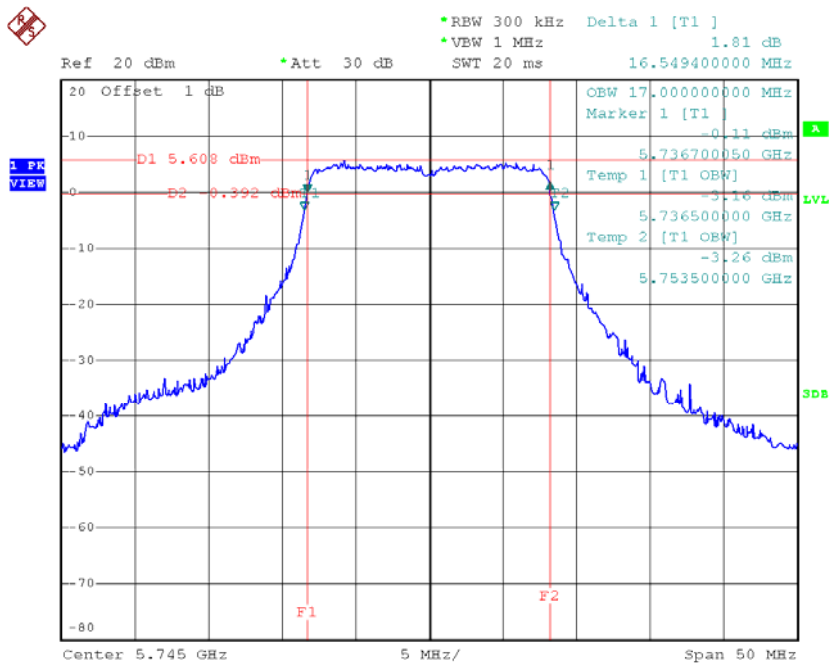


Date: 1.APR.2015 15:37:11

**TX CH 157**

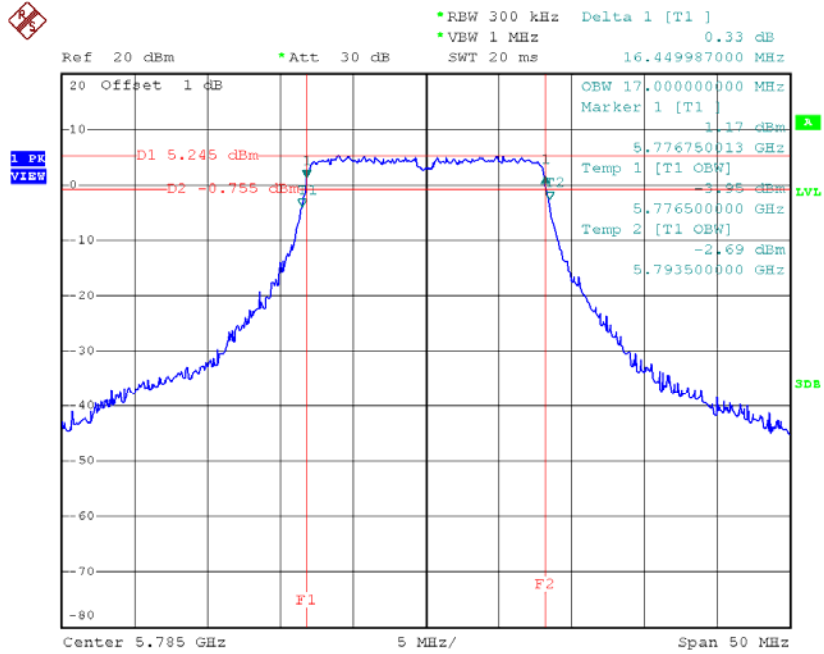

Date: 1.APR.2015 15:43:37

**TX CH 165**

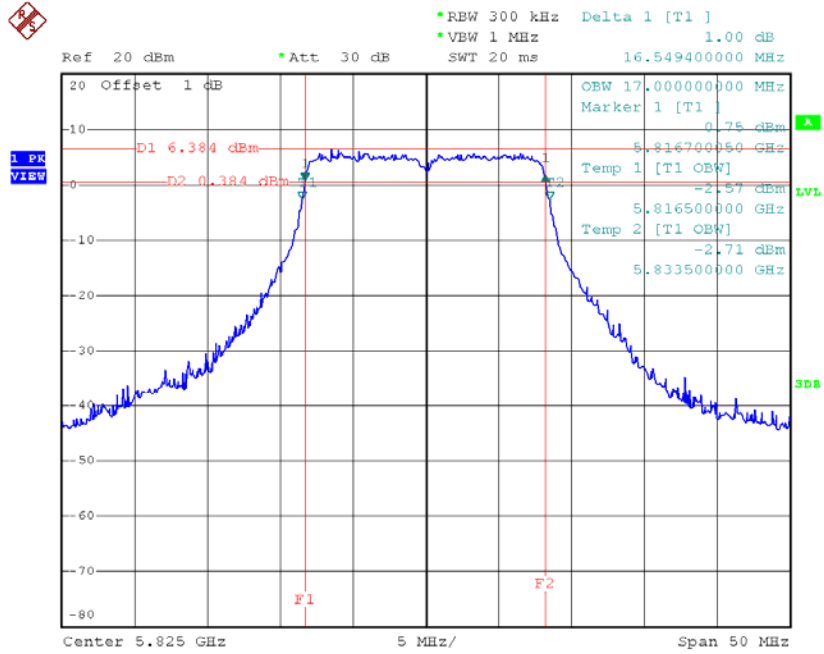


Date: 1.APR.2015 15:47:30

**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	18.00	>=500
CH157	5785	17.85	18.00	>=500
CH165	5825	17.85	18.00	>=500

**TX CH 149**

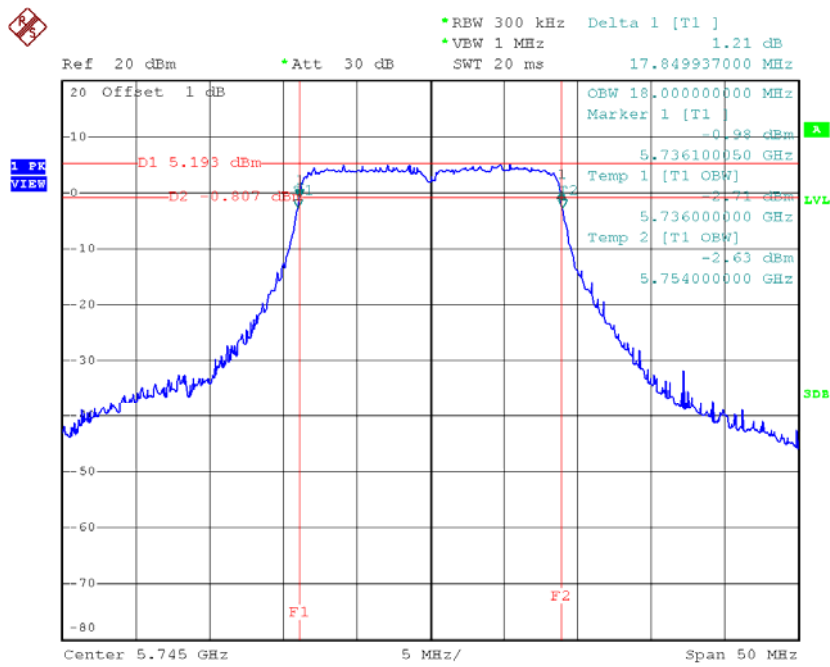


Date: 1.APR.2015 15:56:26

### TX CH 157

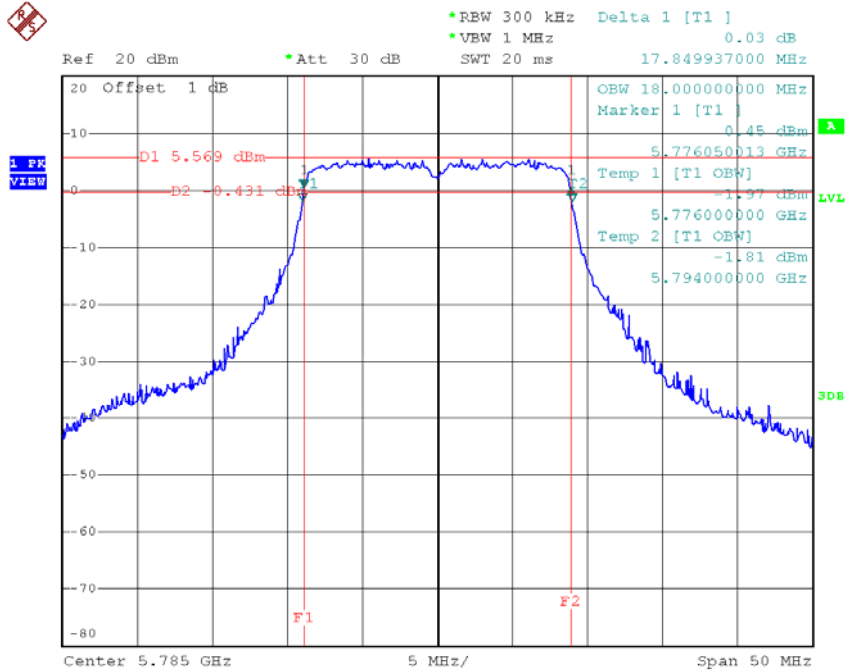

Date: 1.APR.2015 15:57:25

### TX CH 165

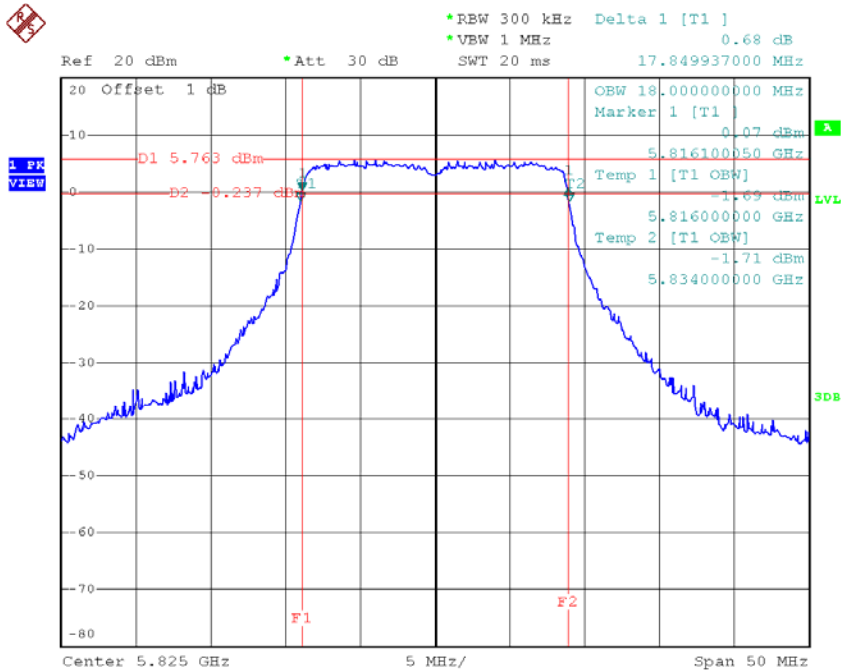


Date: 1.APR.2015 15:58:01

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.60	36.40	>=500
CH159	5795	36.50	36.40	>=500

### TX CH 151

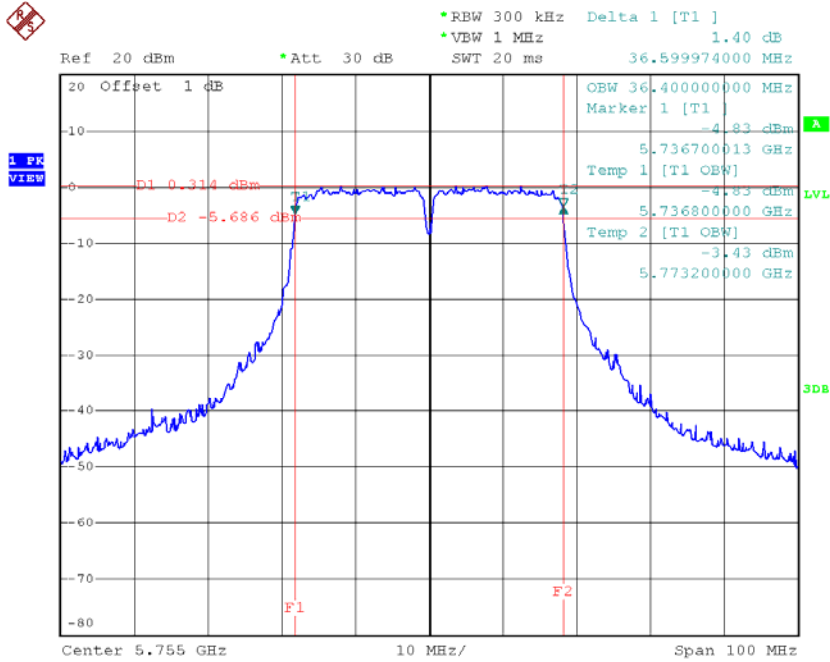

Date: 1.APR.2015 19:46:28

### TX CH 159

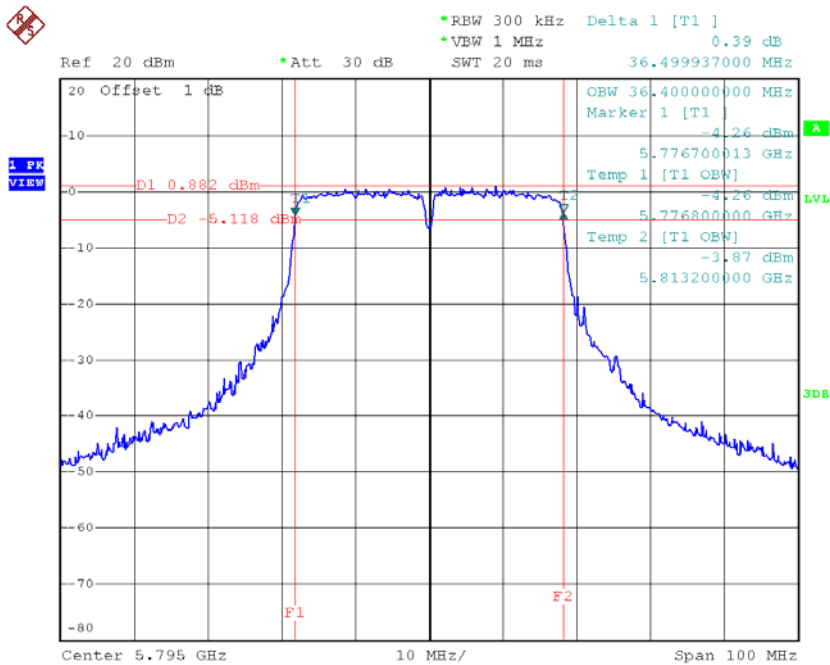


Date: 1.APR.2015 19:47:29

**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	23.65	18.00
CH40	5200	23.20	18.00
CH48	5240	23.14	18.10

**TX CH36**

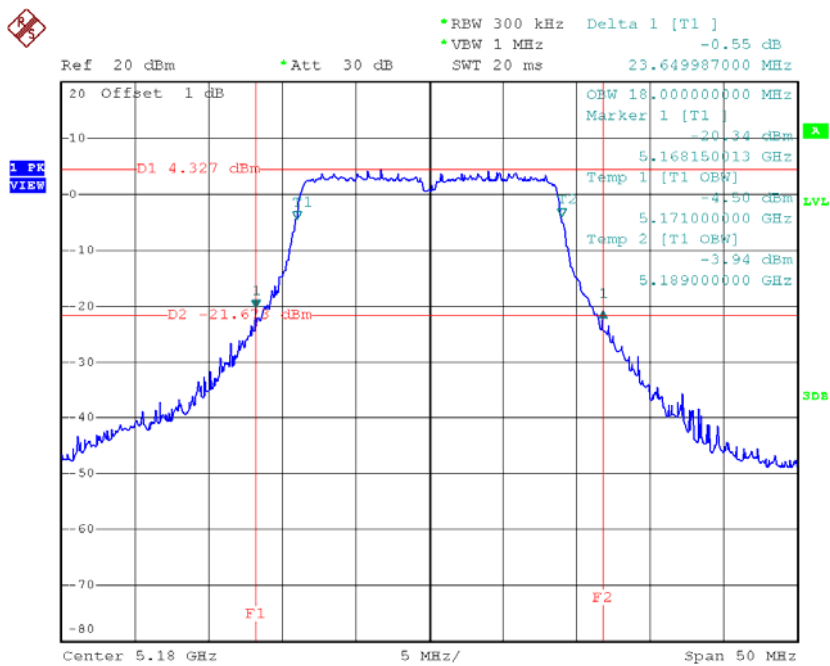


Date: 1.APR.2015 15:59:52

### TX CH40

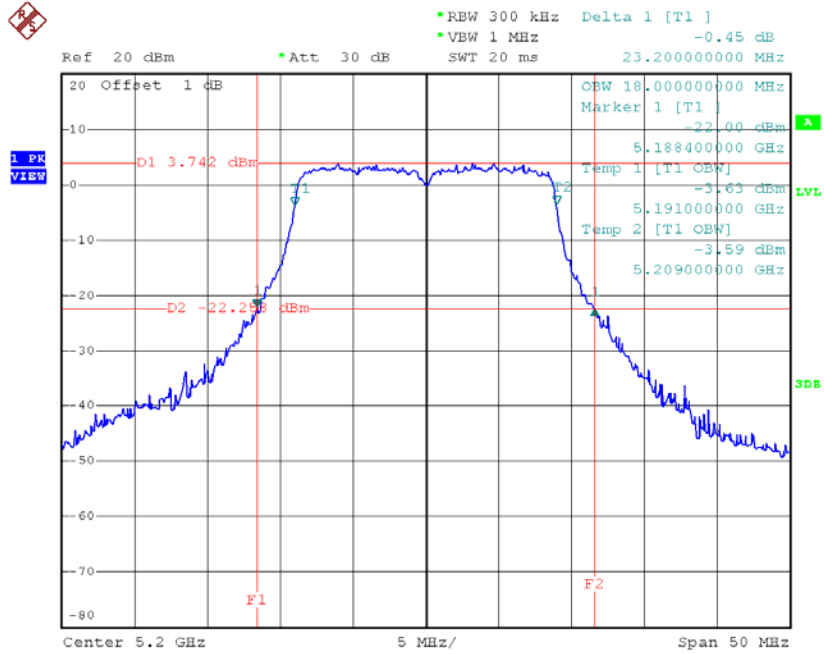

Date: 1.APR.2015 16:00:57

### TX CH48

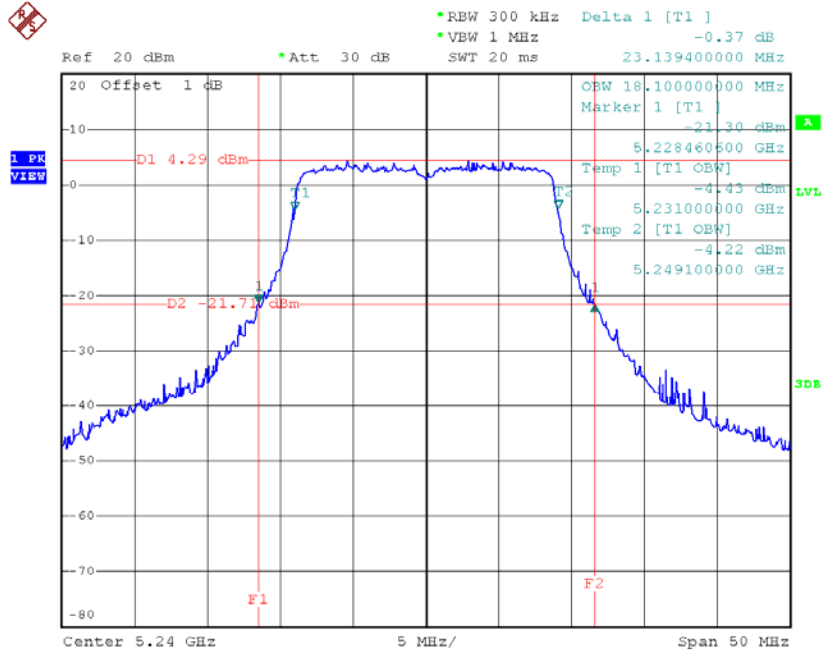


Date: 1.APR.2015 16:02:43

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	42.59	36.40
CH46	5230	42.90	36.40

### TX CH38

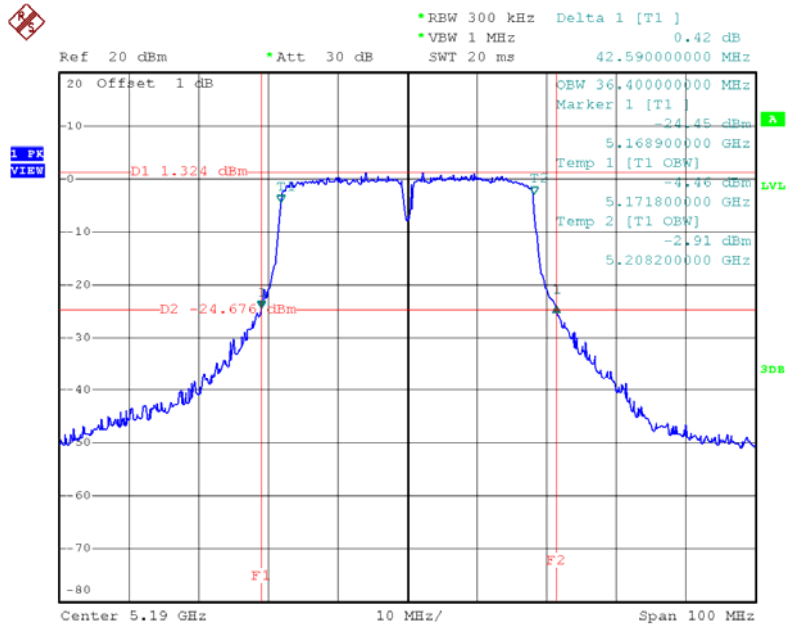

Date: 1.APR.2015 19:48:24

### TX CH46

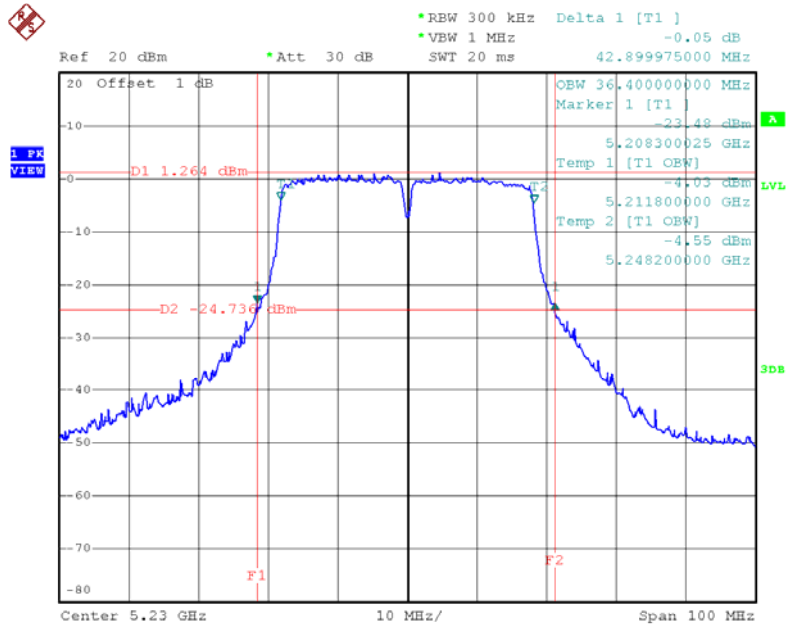


Date: 1.APR.2015 19:49:21

**Test Mode: UNII-1/TX AC80 Mode\_CH42**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	82.60	76.00

**TX CH42**

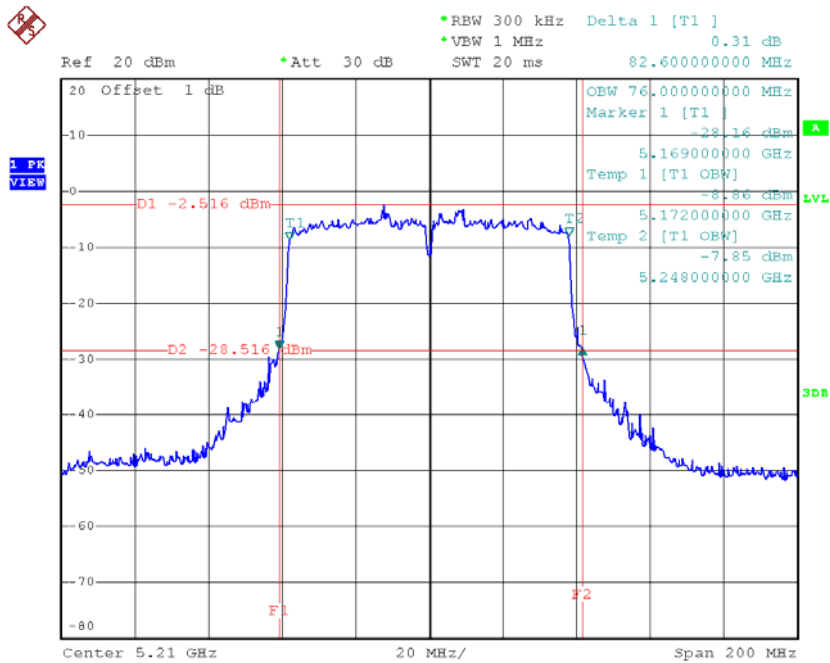


Date: 1.APR.2015 20:01:30

**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.99	18.00
CH60	5300	23.10	18.00
CH64	5320	23.20	18.00

**TX CH52**

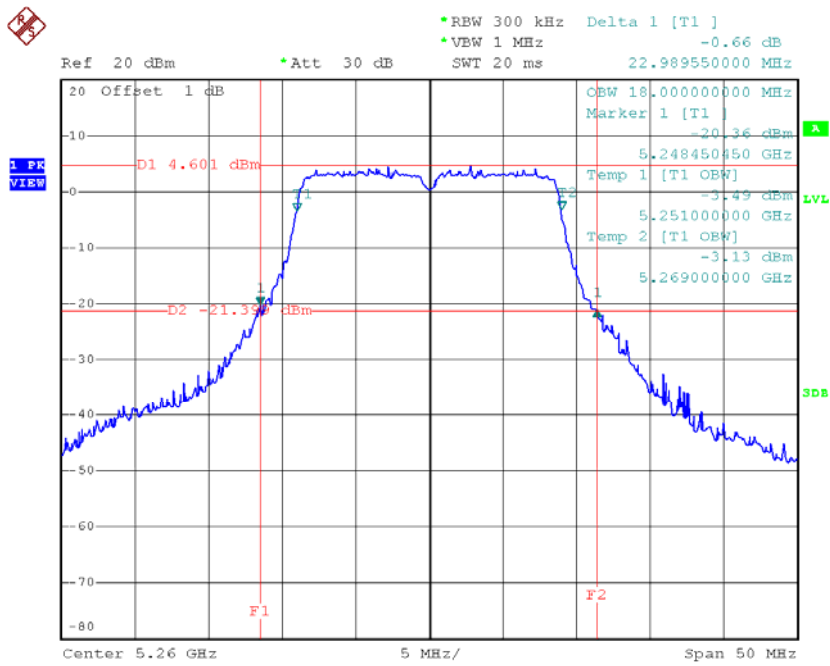


Date: 1.APR.2015 16:03:54

**TX CH60**

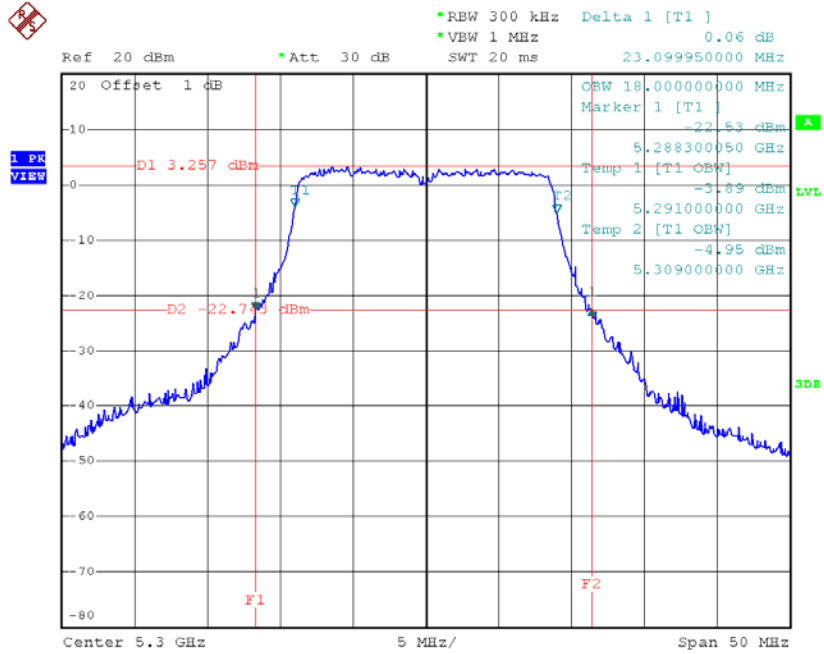

Date: 1.APR.2015 16:04:52

**TX CH64**

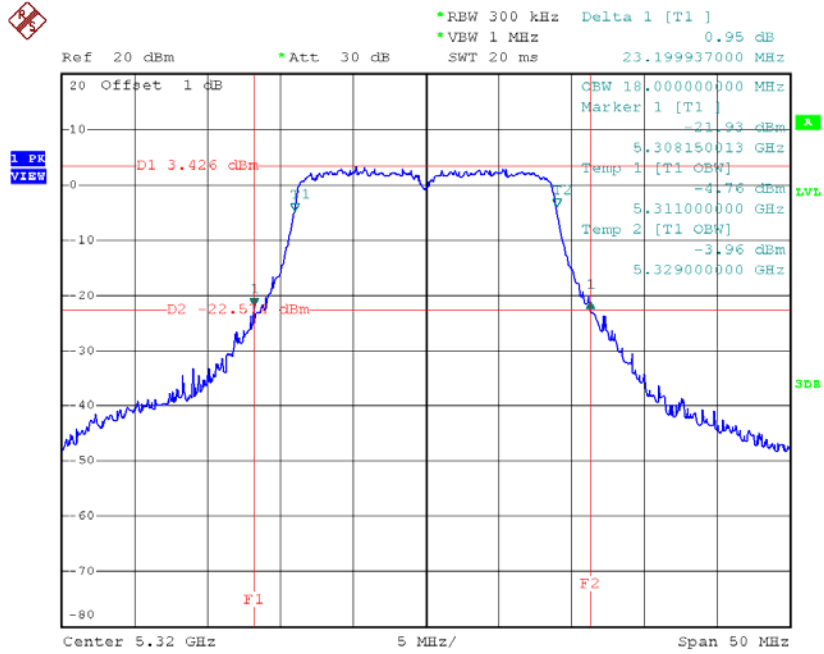

Date: 1.APR.2015 16:06:35

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	43.10	36.40
CH62	5310	42.80	36.40



**Test Mode: UNII-2A/TX AC80 Mode\_CH58**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	83.00	76.00

**TX CH58**

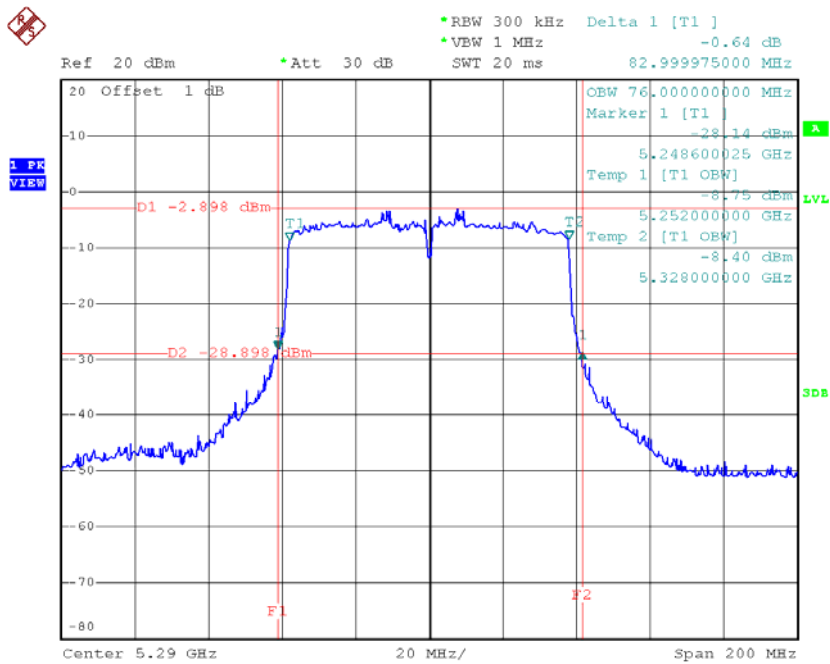


Date: 1.APR.2015 20:02:47

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.20	18.00
CH116	5580	23.19	18.00
CH140	5700	23.10	18.00

**TX CH100**

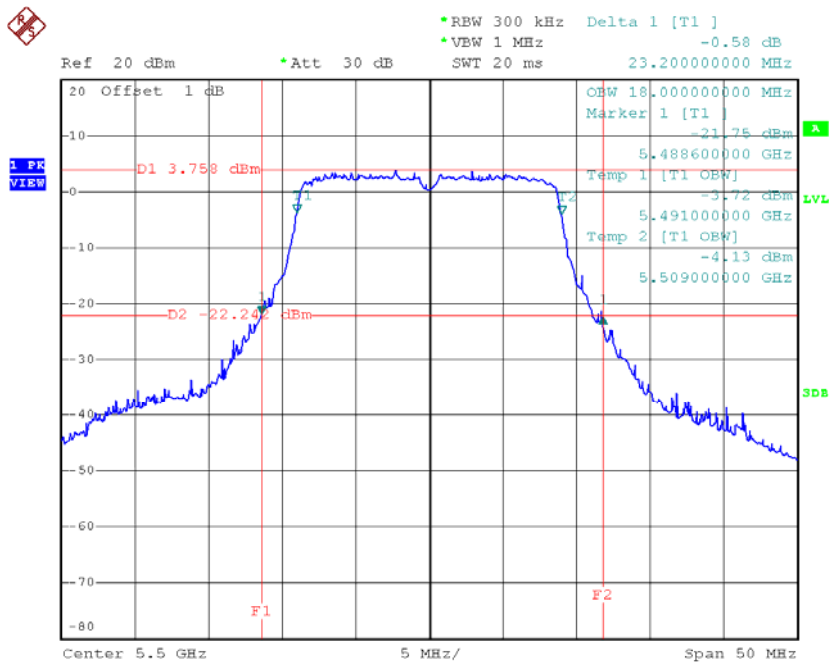


Date: 1.APR.2015 16:08:17

**TX CH116**

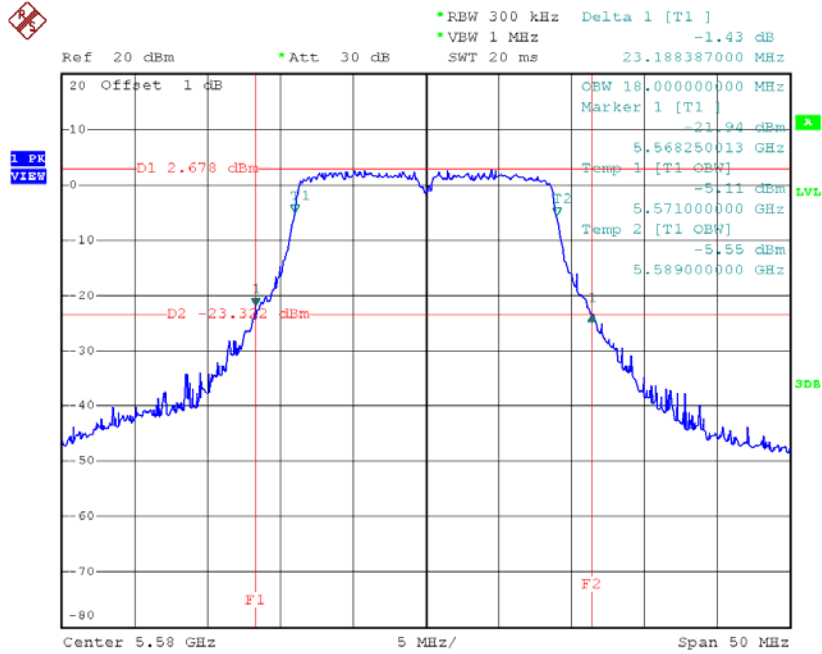

Date: 1.APR.2015 16:09:18

**TX CH140**

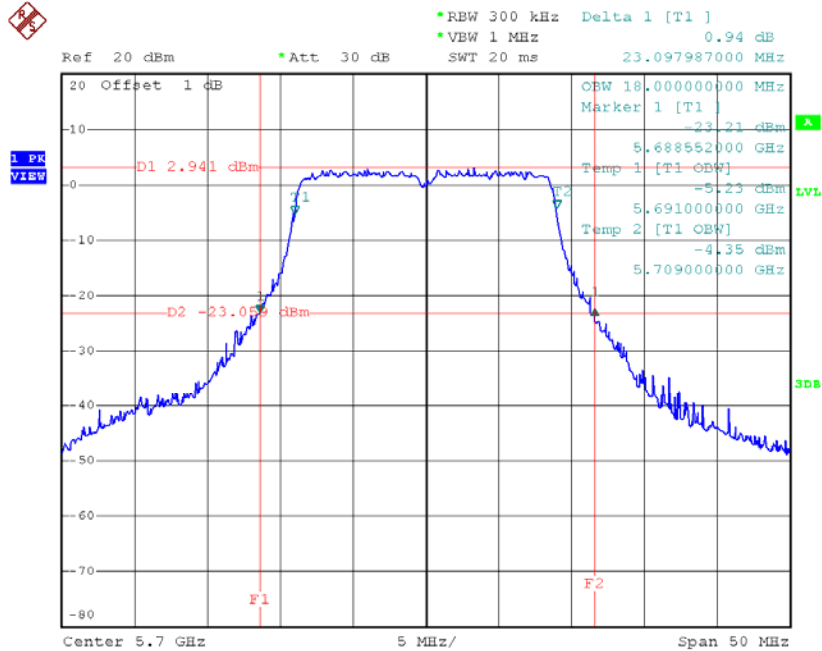


Date: 1.APR.2015 16:09:50

**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	42.50	36.40
CH110	5550	43.29	36.40
CH134	5670	42.80	36.40

**TX CH102**

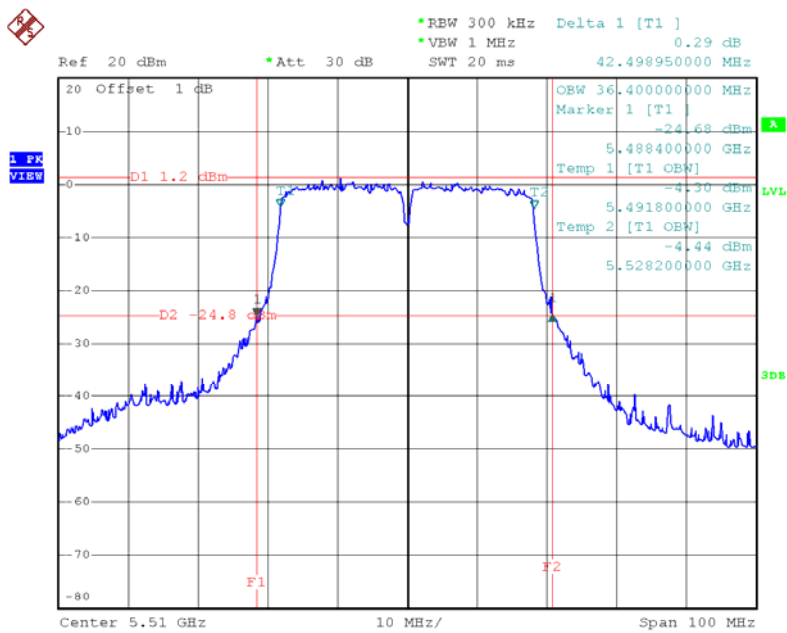


Date: 1.APR.2015 19:51:28

**TX CH110**

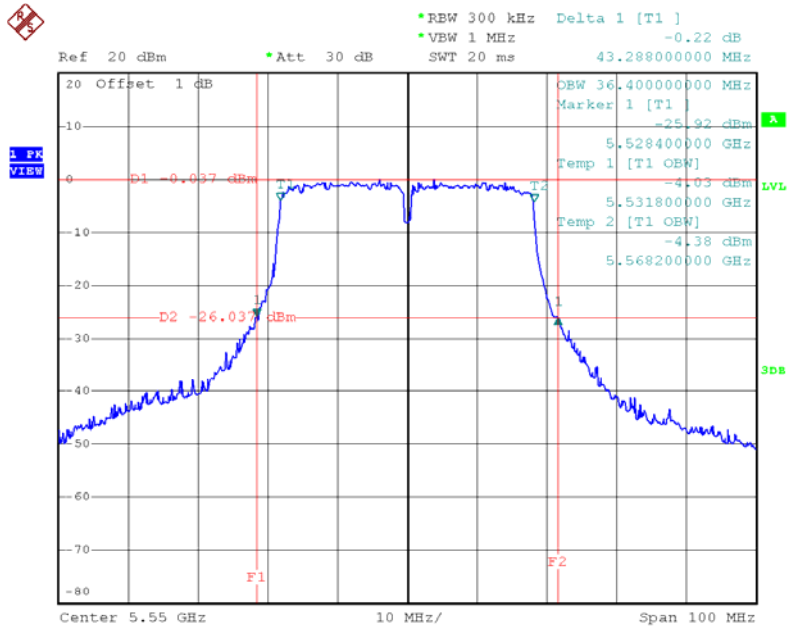

Date: 1.APR.2015 19:57:21

**TX CH134**

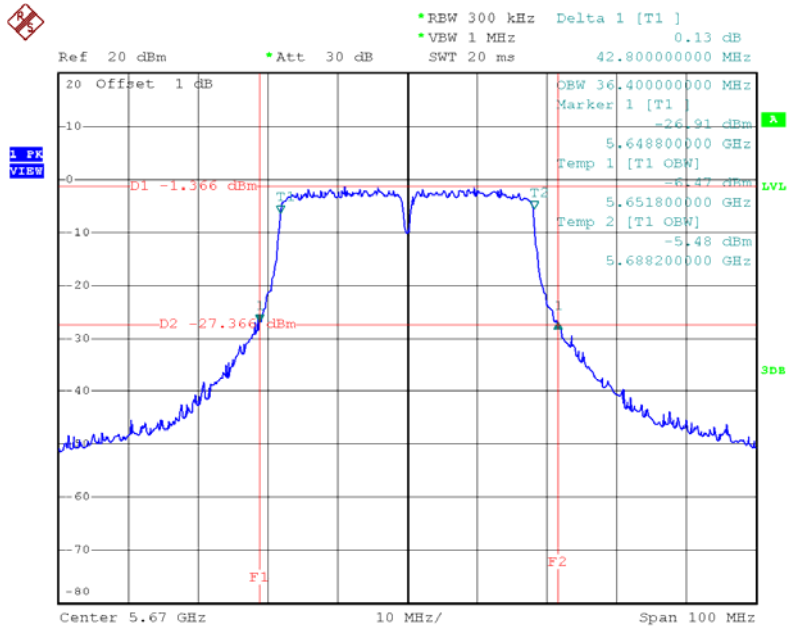


Date: 1.APR.2015 19:57:54

**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	83.21	76.00
CH122	5610	82.40	76.00

### TX CH106

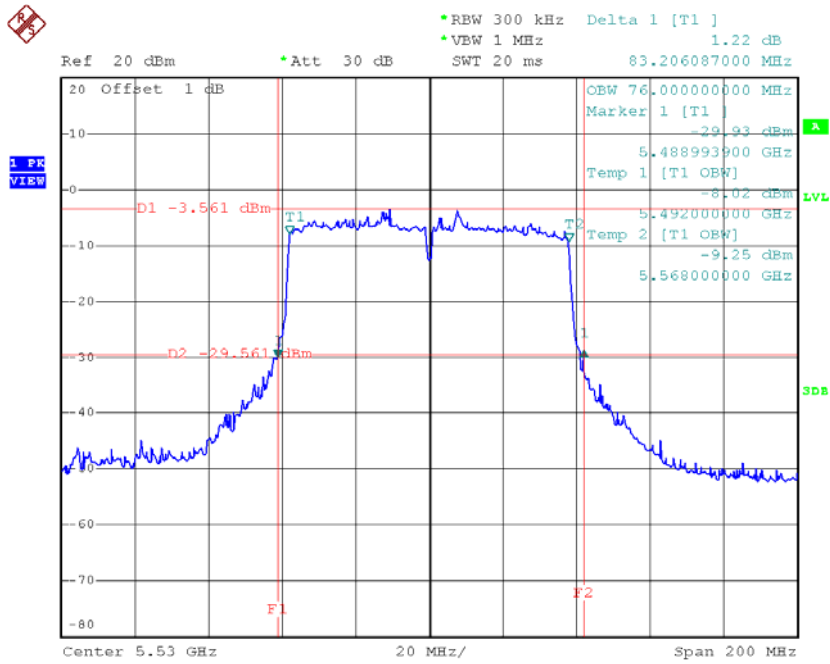

Date: 1.APR.2015 20:04:01

### TX CH122

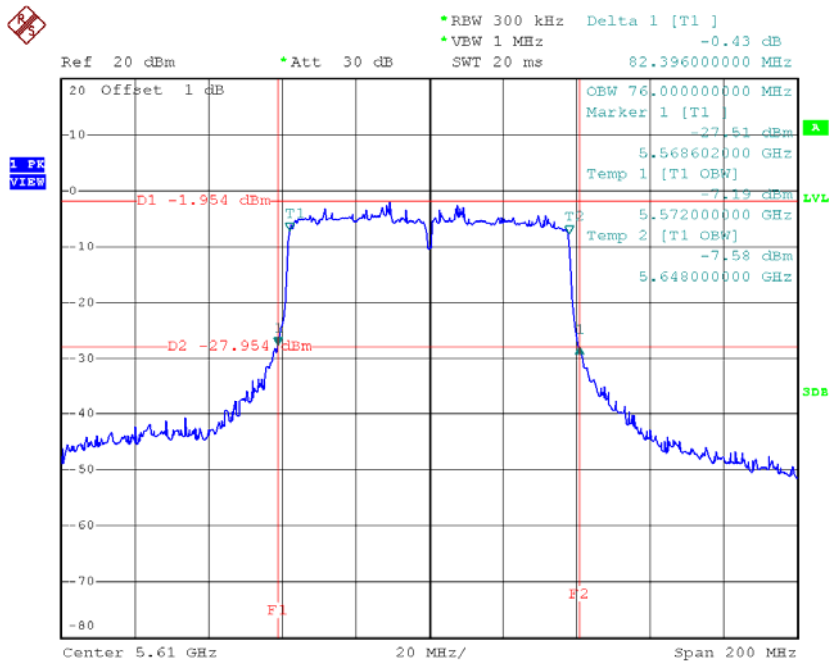


Date: 1.APR.2015 20:05:10

**Test Mode: UNII-3/ TX AC20 Mode\_ CH149/CH157/CH165**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	18.00	>=500
CH157	5785	17.80	18.00	>=500
CH165	5825	17.85	18.00	>=500

**TX CH 149**

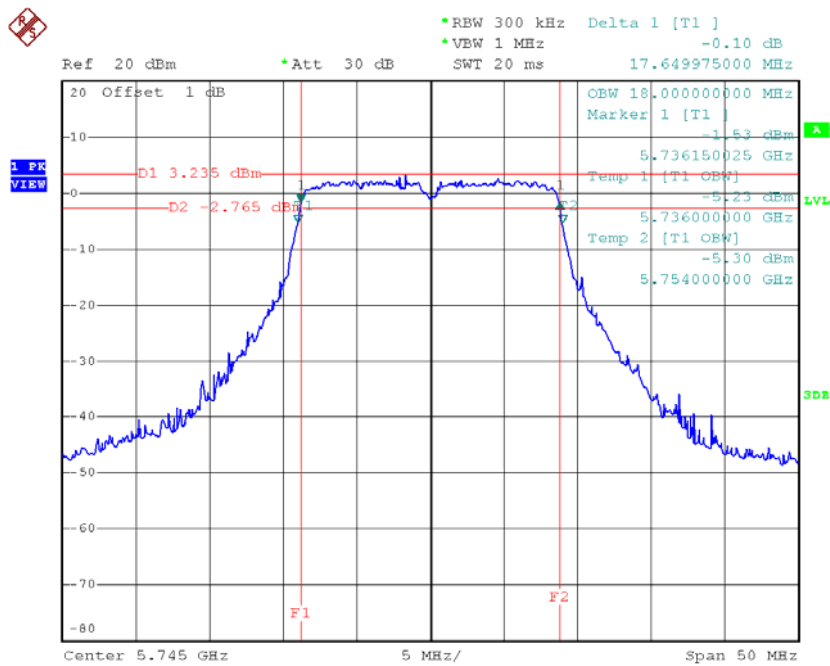


Date: 1.APR.2015 16:10:39

### TX CH 157

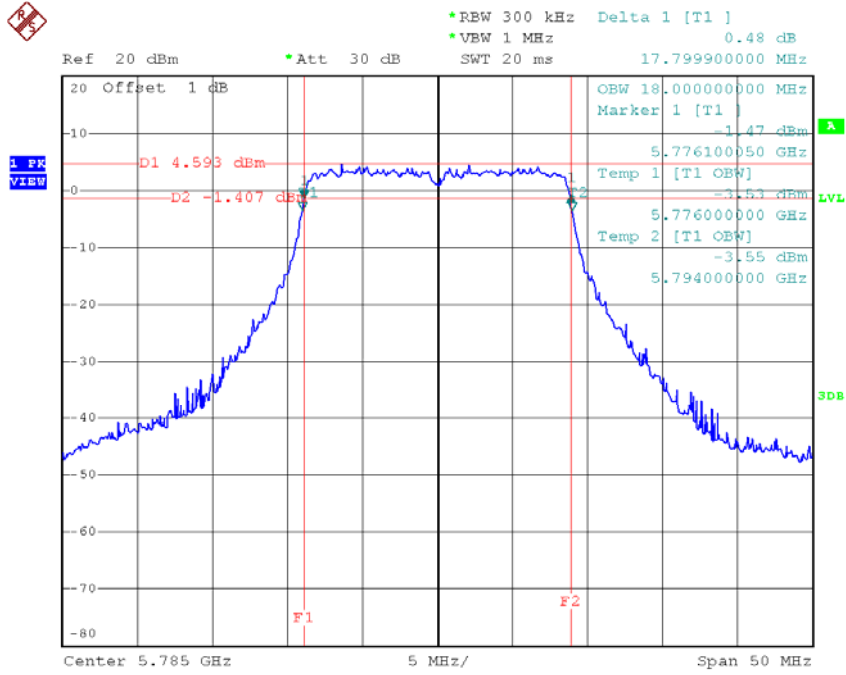

Date: 1.APR.2015 19:36:58

### TX CH 165

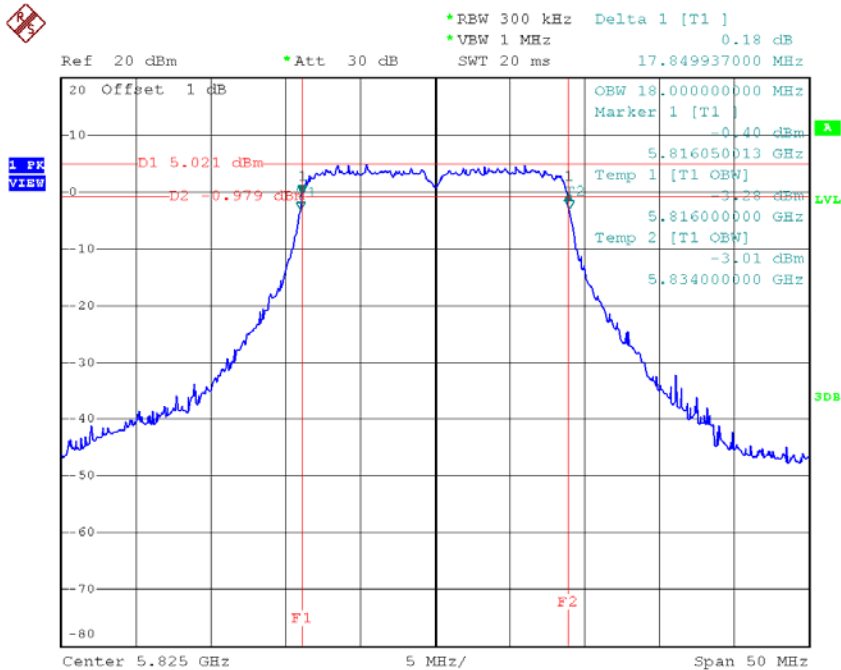


Date: 1.APR.2015 19:37:49

**Test Mode: UNII-3/ TX AC40 Mode\_CH151/CH159**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.59	36.40	>=500
CH159	5795	36.60	36.40	>=500

### TX CH 151

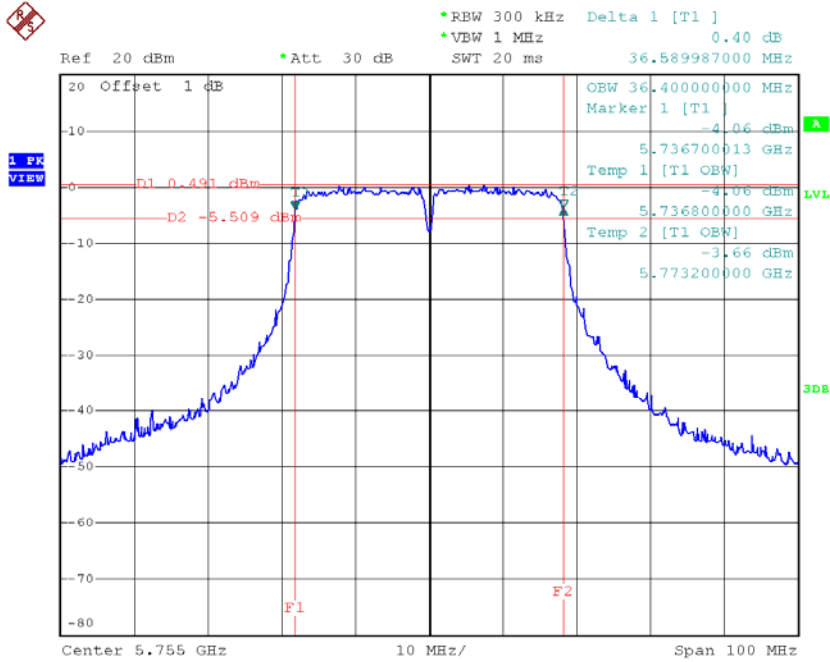

Date: 1.APR.2015 19:58:36

### TX CH 159

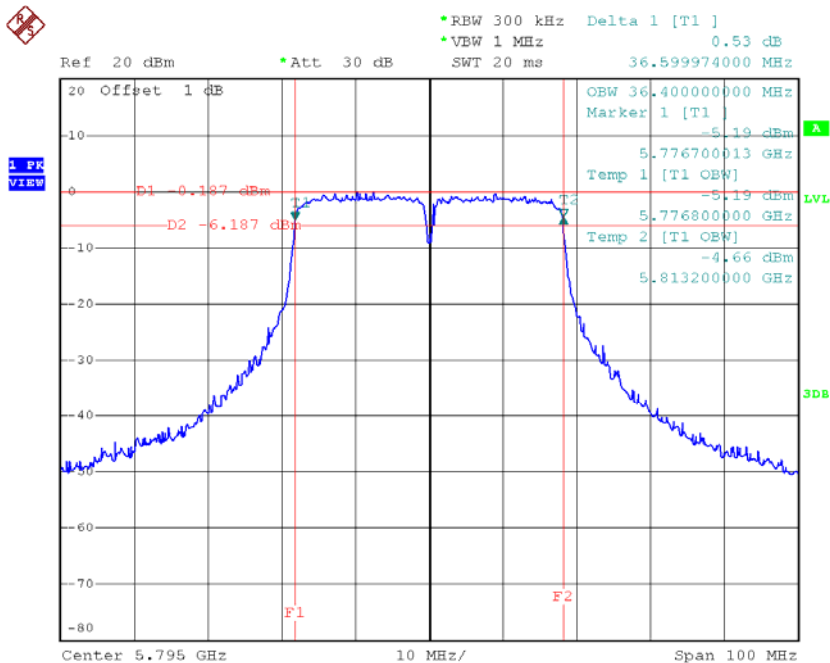


Date: 1.APR.2015 19:59:31

**Test Mode: UNII-3/ TX AC80 Mode\_CH155**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.40	76.00	>=500

**TX CH 155**

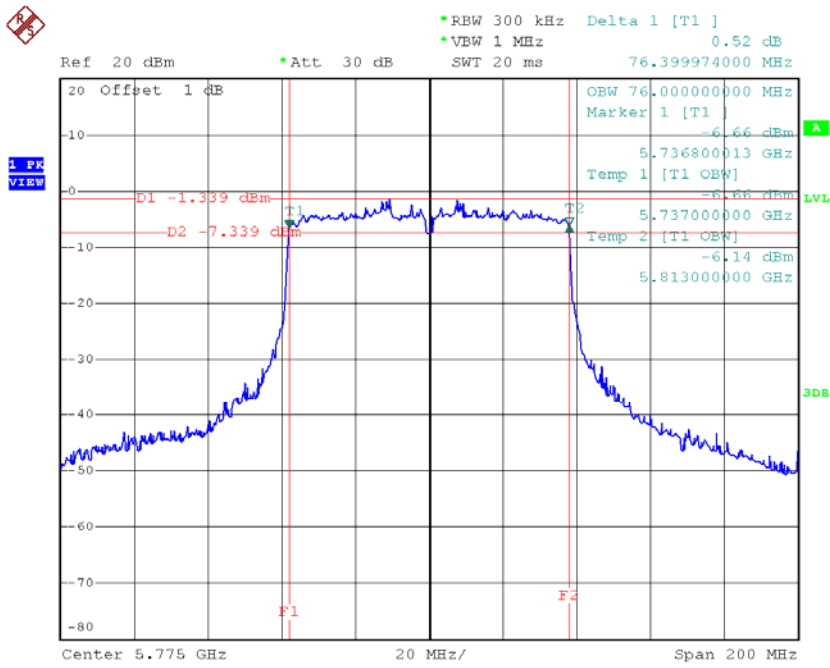

Date: 1.APR.2015 20:06:03

## **ATTACHMENT F - MAXIMUM OUTPUT POWER**

## For 1TX

### Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.36	0.03	19.39	28.00	0.63
CH40	5200	19.28	0.03	19.31	28.00	0.63
CH48	5240	19.53	0.03	19.56	28.00	0.63

### Test Mode: UNII-1/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.26	0.10	17.36	28.00	0.63
CH40	5200	17.18	0.10	17.28	28.00	0.63
CH48	5240	17.35	0.10	17.45	28.00	0.63

### Test Mode: UNII-1/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.09	0.13	16.22	28.00	0.63
CH46	5230	16.15	0.13	16.28	28.00	0.63

**Test Mode: UNII-2A/TX A Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.48	0.03	19.51	22.00	0.16
CH60	5300	19.37	0.03	19.40	22.00	0.16
CH64	5320	19.51	0.03	19.54	22.00	0.16

**Test Mode: UNII-2A/TX N20 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.26	0.10	17.36	22.00	0.16
CH60	5300	17.19	0.10	17.29	22.00	0.16
CH64	5320	17.22	0.10	17.32	22.00	0.16

**Test Mode: UNII-2A/TX N40 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.07	0.13	16.20	22.00	0.16
CH62	5310	11.39	0.13	11.52	22.00	0.16

**Test Mode: UNII-2C/TX A Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.53	0.03	19.56	22.00	0.16
CH116	5580	19.28	0.03	19.31	22.00	0.16
CH140	5700	19.31	0.03	19.34	22.00	0.16

**Test Mode: UNII-2C/TX N20 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.30	0.10	17.40	22.00	0.16
CH116	5580	17.28	0.10	17.38	22.00	0.16
CH140	5700	17.16	0.10	17.26	22.00	0.16

**Test Mode: UNII-2C/TX N40 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.51	0.13	14.64	22.00	0.16
CH110	5550	14.39	0.13	14.52	22.00	0.16
CH134	5670	14.35	0.13	14.48	22.00	0.16

**Test Mode: UNII-3/ TX A Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.25	0.03	19.28	28.00	0.63
CH157	5785	19.36	0.03	19.39	28.00	0.63
CH165	5825	19.53	0.03	19.56	28.00	0.63

**Test Mode: UNII-3/TX N20 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.23	0.10	17.33	28.00	0.63
CH157	5785	17.36	0.10	17.46	28.00	0.63
CH165	5825	17.33	0.10	17.43	28.00	0.63

**Test Mode: UNII-3/ TX N40 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.37	0.13	14.50	28.00	0.63
CH159	5795	14.49	0.13	14.62	28.00	0.63

**Test Mode: UNII-1/TX AC20 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.38	0.16	17.54	28.00	0.63
CH40	5200	17.43	0.16	17.59	28.00	0.63
CH48	5240	17.52	0.16	17.68	28.00	0.63

**Test Mode: UNII-1/TX AC40 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.38	0.19	11.57	28.00	0.63
CH46	5230	14.29	0.19	14.48	28.00	0.63

**Test Mode: UNII-1/TX AC80 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.16	0.48	9.64	28.00	0.63

**Test Mode: UNII-2A/TX AC20 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.36	0.16	17.52	22.00	0.16
CH60	5300	17.29	0.16	17.45	22.00	0.16
CH64	5320	17.18	0.16	17.34	22.00	0.16

**Test Mode: UNII-2A/TX AC40 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.35	0.19	14.54	22.00	0.16
CH62	5310	11.43	0.19	11.62	22.00	0.16

**Test Mode: UNII-2A/TX AC80 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.15	0.48	9.63	22.00	0.16

**Test Mode: UNII-2C/TX AC20 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.33	0.16	17.49	22.00	0.16
CH116	5580	17.29	0.16	17.45	22.00	0.16
CH140	5700	17.31	0.16	17.47	22.00	0.16

**Test Mode: UNII-2C/TX AC40 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.56	0.19	14.75	22.00	0.16
CH110	5550	14.38	0.19	14.57	22.00	0.16
CH134	5670	14.46	0.19	14.65	22.00	0.16

**Test Mode: UNII-2C/TX AC80 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.09	0.48	9.57	22.00	0.16
CH122	5610	16.27	0.48	16.75	22.00	0.16

**Test Mode: UNII-3/TX AC20 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.29	0.16	17.45	28.00	0.63
CH157	5785	17.39	0.16	17.55	28.00	0.63
CH165	5825	17.41	0.16	17.57	28.00	0.63

**Test Mode: UNII-3/TX AC40 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.39	0.19	14.58	28.00	0.63
CH159	5795	14.51	0.19	14.70	28.00	0.63

**Test Mode: UNII-3/TX AC80 Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.08	0.48	11.56	28.00	0.63

## For 2TX

### Test Mode: UNII-1/TX A Mode\_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.36	0.03	19.39	28.00	0.63
CH40	5200	19.28	0.03	19.31	28.00	0.63
CH48	5240	19.53	0.03	19.56	28.00	0.63

### Test Mode: UNII-1/TX A Mode\_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.43	0.03	15.46	28.00	0.63
CH40	5200	15.49	0.03	15.52	28.00	0.63
CH48	5240	15.41	0.03	15.44	28.00	0.63

### Test Mode: UNII-1/TX A Mode\_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.84	0.03	20.87	28.00	0.63
CH40	5200	20.80	0.03	20.83	28.00	0.63
CH48	5240	20.95	0.03	20.98	28.00	0.63

**Test Mode: UNII-1/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.26	0.10	17.36	28.00	0.63
CH40	5200	17.18	0.10	17.28	28.00	0.63
CH48	5240	17.35	0.10	17.45	28.00	0.63

**Test Mode: UNII-1/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.63	0.10	15.73	28.00	0.63
CH40	5200	15.49	0.10	15.59	28.00	0.63
CH48	5240	15.51	0.10	15.61	28.00	0.63

**Test Mode: UNII-1/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.53	0.10	19.63	28.00	0.63
CH40	5200	19.43	0.10	19.53	28.00	0.63
CH48	5240	19.54	0.10	19.64	28.00	0.63

**Test Mode: UNII-1/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.09	0.13	16.22	28.00	0.63
CH46	5230	16.15	0.13	16.28	28.00	0.63

**Test Mode: UNII-1/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.33	0.13	11.46	28.00	0.63
CH46	5230	14.39	0.13	14.52	28.00	0.63

**Test Mode: UNII-1/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.34	0.13	17.47	28.00	0.63
CH46	5230	18.37	0.13	18.50	28.00	0.63

**Test Mode: UNII-2A/TX A Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.48	0.03	19.51	22.00	0.16
CH60	5300	19.37	0.03	19.40	22.00	0.16
CH64	5320	19.51	0.03	19.54	22.00	0.16

**Test Mode: UNII-2A/TX A Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.43	0.03	15.46	22.00	0.16
CH60	5300	15.52	0.03	15.55	22.00	0.16
CH64	5320	15.47	0.03	15.50	22.00	0.16

**Test Mode: UNII-2A/TX A Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	20.92	0.03	20.95	22.00	0.16
CH60	5300	20.87	0.03	20.90	22.00	0.16
CH64	5320	20.95	0.03	20.98	22.00	0.16

**Test Mode: UNII-2A/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.26	0.10	17.36	22.00	0.16
CH60	5300	17.19	0.10	17.29	22.00	0.16
CH64	5320	17.22	0.10	17.32	22.00	0.16

**Test Mode: UNII-2A/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.62	0.10	15.72	22.00	0.16
CH60	5300	15.58	0.10	15.68	22.00	0.16
CH64	5320	15.67	0.10	15.77	22.00	0.16

**Test Mode: UNII-2A/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.53	0.10	19.63	22.00	0.16
CH60	5300	19.47	0.10	19.57	22.00	0.16
CH64	5320	19.52	0.10	19.62	22.00	0.16

**Test Mode: UNII-2A/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.07	0.13	16.20	22.00	0.16
CH62	5310	11.39	0.13	11.52	22.00	0.16

**Test Mode: UNII-2A/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.29	0.13	14.42	22.00	0.16
CH62	5310	11.52	0.13	11.65	22.00	0.16

**Test Mode: UNII-2A/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.28	0.13	18.41	22.00	0.16
CH62	5310	14.47	0.13	14.60	22.00	0.16

**Test Mode: UNII-2C/TX A Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.53	0.03	19.56	22.00	0.16
CH116	5580	19.28	0.03	19.31	22.00	0.16
CH140	5700	19.31	0.03	19.34	22.00	0.16

**Test Mode: UNII-2C/TX A Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.55	0.03	15.58	22.00	0.16
CH116	5580	15.51	0.03	15.54	22.00	0.16
CH140	5700	15.46	0.03	15.49	22.00	0.16

**Test Mode: UNII-2C/TX A Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	20.99	0.03	21.02	22.00	0.16
CH116	5580	20.80	0.03	20.83	22.00	0.16
CH140	5700	20.81	0.03	20.84	22.00	0.16

**Test Mode: UNII-2C/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.30	0.10	17.40	22.00	0.16
CH116	5580	17.28	0.10	17.38	22.00	0.16
CH140	5700	17.16	0.10	17.26	22.00	0.16

**Test Mode: UNII-2C/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.55	0.10	15.65	22.00	0.16
CH116	5580	15.64	0.10	15.74	22.00	0.16
CH140	5700	14.91	0.10	15.01	22.00	0.16

**Test Mode: UNII-2C/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.52	0.10	19.62	22.00	0.16
CH116	5580	19.55	0.10	19.65	22.00	0.16
CH140	5700	19.19	0.10	19.29	22.00	0.16

**Test Mode: UNII-2C/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.51	0.13	14.64	22.00	0.16
CH110	5550	14.39	0.13	14.52	22.00	0.16
CH134	5670	14.35	0.13	14.48	22.00	0.16

**Test Mode: UNII-2C/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.58	0.13	14.71	22.00	0.16
CH110	5550	14.34	0.13	14.47	22.00	0.16
CH134	5670	14.61	0.13	14.74	22.00	0.16

**Test Mode: UNII-2C/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	17.56	0.13	17.69	22.00	0.16
CH110	5550	17.38	0.13	17.51	22.00	0.16
CH134	5670	17.49	0.13	17.62	22.00	0.16

**Test Mode: UNII-3/ TX A Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.25	0.03	19.28	28.00	0.63
CH157	5785	19.36	0.03	19.39	28.00	0.63
CH165	5825	19.53	0.03	19.56	28.00	0.63

**Test Mode: UNII-3/ TX A Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.56	0.03	15.59	28.00	0.63
CH157	5785	15.43	0.03	15.46	28.00	0.63
CH165	5825	15.61	0.03	15.64	28.00	0.63

**Test Mode: UNII-3/ TX A Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.80	0.03	20.83	28.00	0.63
CH157	5785	20.84	0.03	20.87	28.00	0.63
CH165	5825	21.01	0.03	21.04	28.00	0.63

**Test Mode: UNII-3/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.23	0.10	17.33	28.00	0.63
CH157	5785	17.36	0.10	17.46	28.00	0.63
CH165	5825	17.33	0.10	17.43	28.00	0.63

**Test Mode: UNII-3/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.93	0.10	15.03	28.00	0.63
CH157	5785	14.87	0.10	14.97	28.00	0.63
CH165	5825	14.91	0.10	15.01	28.00	0.63

**Test Mode: UNII-3/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.24	0.10	19.34	28.00	0.63
CH157	5785	19.30	0.10	19.40	28.00	0.63
CH165	5825	19.30	0.10	19.40	28.00	0.63

**Test Mode: UNII-3/ TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.37	0.13	14.50	28.00	0.63
CH159	5795	14.49	0.13	14.62	28.00	0.63

**Test Mode: UNII-3/ TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.50	0.13	14.63	28.00	0.63
CH159	5795	14.39	0.13	14.52	28.00	0.63

**Test Mode: UNII-3/ TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.45	0.13	17.58	28.00	0.63
CH159	5795	17.45	0.13	17.58	28.00	0.63

**Test Mode: UNII-1/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.38	0.16	17.54	28.00	0.63
CH40	5200	17.43	0.16	17.59	28.00	0.63
CH48	5240	17.52	0.16	17.68	28.00	0.63

**Test Mode: UNII-1/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.72	0.16	14.88	28.00	0.63
CH40	5200	14.89	0.16	15.05	28.00	0.63
CH48	5240	14.88	0.16	15.04	28.00	0.63

**Test Mode: UNII-1/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.26	0.16	19.42	28.00	0.63
CH40	5200	19.35	0.16	19.51	28.00	0.63
CH48	5240	19.41	0.16	19.57	28.00	0.63

**Test Mode: UNII-1/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.38	0.19	11.57	28.00	0.63
CH46	5230	14.29	0.19	14.48	28.00	0.63

**Test Mode: UNII-1/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.41	0.19	11.60	28.00	0.63
CH46	5230	14.35	0.19	14.54	28.00	0.63

**Test Mode: UNII-1/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.41	0.19	14.60	28.00	0.63
CH46	5230	17.33	0.19	17.52	28.00	0.63

**Test Mode: UNII-1/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.16	0.48	9.64	28.00	0.63

**Test Mode: UNII-1/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.17	0.48	9.65	28.00	0.63

**Test Mode: UNII-1/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.18	0.48	12.66	28.00	0.63

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.36	0.16	17.52	22.00	0.16
CH60	5300	17.29	0.16	17.45	22.00	0.16
CH64	5320	17.18	0.16	17.34	22.00	0.16

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.75	0.16	14.91	22.00	0.16
CH60	5300	14.91	0.16	15.07	22.00	0.16
CH64	5320	14.90	0.16	15.06	22.00	0.16

**Test Mode: UNII-2A/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.26	0.16	19.42	22.00	0.16
CH60	5300	19.27	0.16	19.43	22.00	0.16
CH64	5320	19.20	0.16	19.36	22.00	0.16

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.35	0.19	14.54	22.00	0.16
CH62	5310	11.43	0.19	11.62	22.00	0.16

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.43	0.19	14.62	22.00	0.16
CH62	5310	11.52	0.19	11.71	22.00	0.16

**Test Mode: UNII-2A/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.40	0.19	17.59	22.00	0.16
CH62	5310	14.49	0.19	14.68	22.00	0.16

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.15	0.48	9.63	22.00	0.16

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.05	0.48	9.53	22.00	0.16

**Test Mode: UNII-2A/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	12.11	0.48	12.59	22.00	0.16

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.33	0.16	17.49	22.00	0.16
CH116	5580	17.29	0.16	17.45	22.00	0.16
CH140	5700	17.31	0.16	17.47	22.00	0.16

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.87	0.16	15.03	22.00	0.16
CH116	5580	14.83	0.16	14.99	22.00	0.16
CH140	5700	14.76	0.16	14.92	22.00	0.16

**Test Mode: UNII-2C/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.28	0.16	19.44	22.00	0.16
CH116	5580	19.24	0.16	19.40	22.00	0.16
CH140	5700	19.23	0.16	19.39	22.00	0.16

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.56	0.19	14.75	22.00	0.16
CH110	5550	14.38	0.19	14.57	22.00	0.16
CH134	5670	14.46	0.19	14.65	22.00	0.16

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.63	0.19	14.82	22.00	0.16
CH110	5550	14.37	0.19	14.56	22.00	0.16
CH134	5670	14.45	0.19	14.64	22.00	0.16

**Test Mode: UNII-2C/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	17.61	0.19	17.80	22.00	0.16
CH110	5550	17.39	0.19	17.58	22.00	0.16
CH134	5670	17.47	0.19	17.66	22.00	0.16

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.09	0.48	9.57	22.00	0.16
CH122	5610	16.27	0.48	16.75	22.00	0.16

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.16	0.48	9.64	22.00	0.16
CH122	5610	16.20	0.48	16.68	22.00	0.16

**Test Mode: UNII-2C/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.14	0.48	12.62	22.00	0.16
CH122	5610	19.25	0.48	19.73	22.00	0.16

**Test Mode: UNII-3/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.29	0.16	17.45	28.00	0.63
CH157	5785	17.39	0.16	17.55	28.00	0.63
CH165	5825	17.41	0.16	17.57	28.00	0.63

**Test Mode: UNII-3/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.68	0.16	14.84	28.00	0.63
CH157	5785	14.85	0.16	15.01	28.00	0.63
CH165	5825	14.75	0.16	14.91	28.00	0.63

**Test Mode: UNII-3/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.19	0.16	19.35	28.00	0.63
CH157	5785	19.31	0.16	19.47	28.00	0.63
CH165	5825	19.29	0.16	19.45	28.00	0.63

**Test Mode: UNII-3/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.39	0.19	14.58	28.00	0.63
CH159	5795	14.51	0.19	14.70	28.00	0.63

**Test Mode: UNII-3/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.31	0.19	14.50	28.00	0.63
CH159	5795	14.39	0.19	14.58	28.00	0.63

**Test Mode: UNII-3/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.36	0.19	17.55	28.00	0.63
CH159	5795	17.46	0.19	17.65	28.00	0.63

**Test Mode: UNII-3/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.08	0.48	11.56	28.00	0.63

**Test Mode: UNII-3/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.12	0.48	11.60	28.00	0.63

**Test Mode: UNII-3/TX AC80 Mode\_Total**


Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	14.11	0.48	14.59	28.00	0.63

## **ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION**

# For 1TX


**Test Mode:** UNII-1/TX A Mode

## TX mode CH36

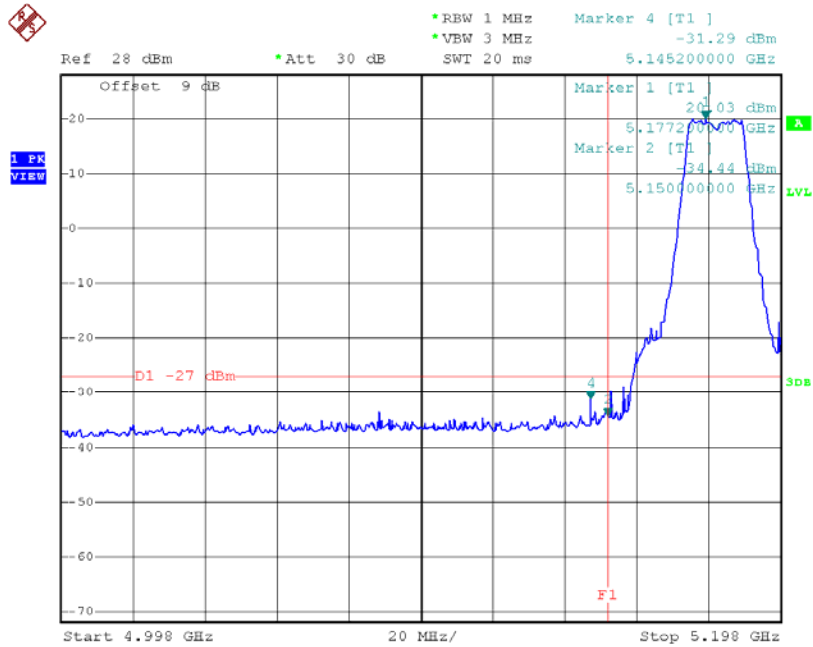

Date: 1.APR.2015 15:22:07


## TX mode CH48

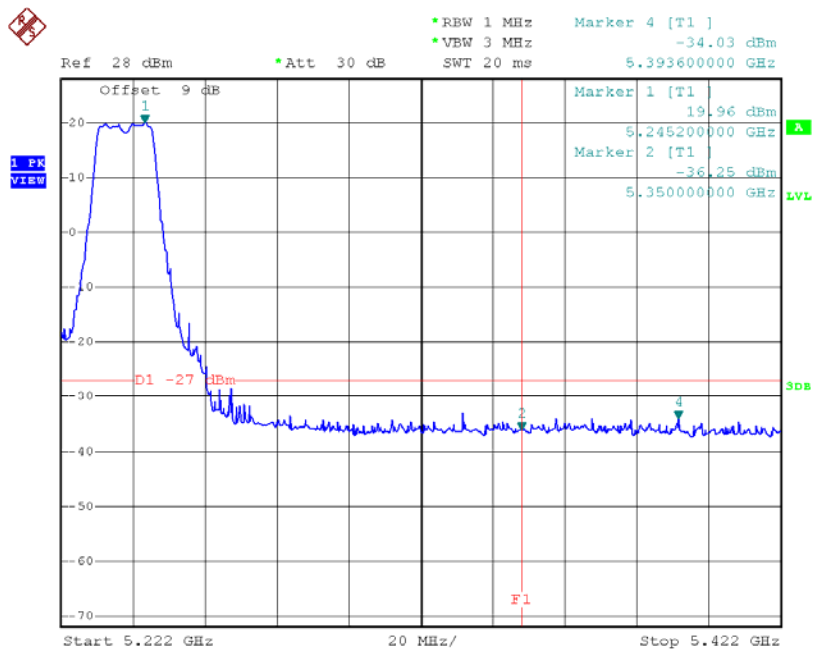

Date: 1.APR.2015 15:26:46


**Test Mode:** UNII-1/TX N20 Mode

**TX mode CH36**

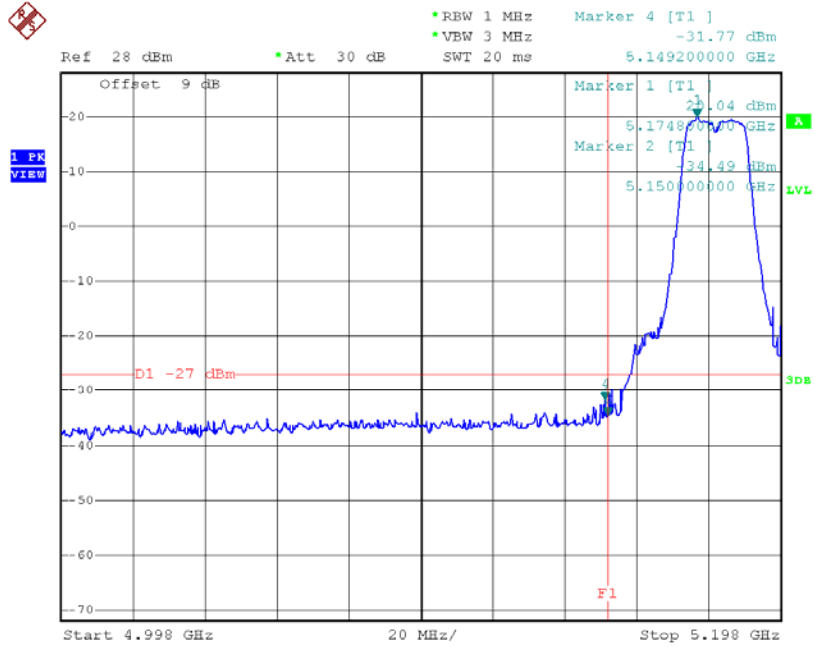

Date: 1.APR.2015 15:49:48


**TX mode CH48**

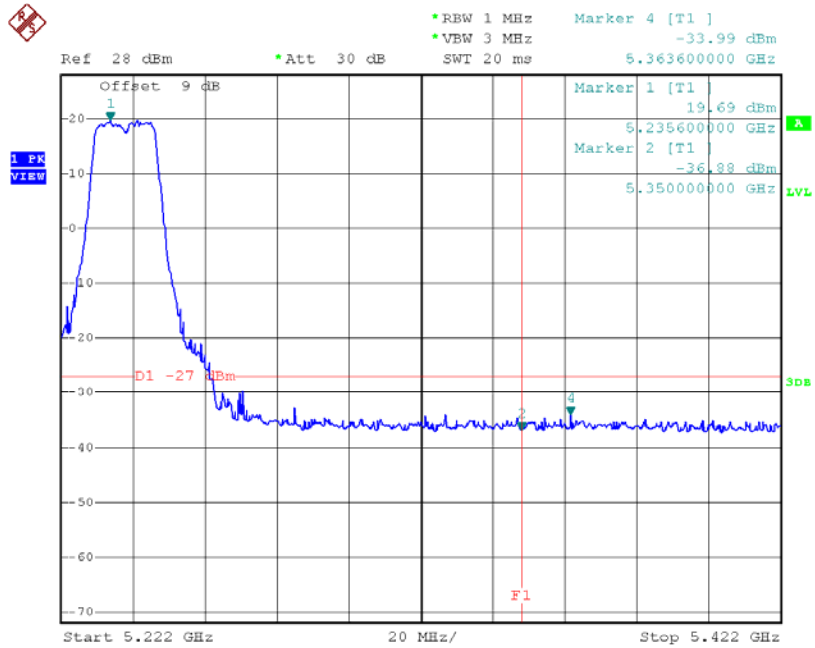

Date: 1.APR.2015 15:51:36


**Test Mode:** UNII-1/TX N40 Mode

### TX mode CH38

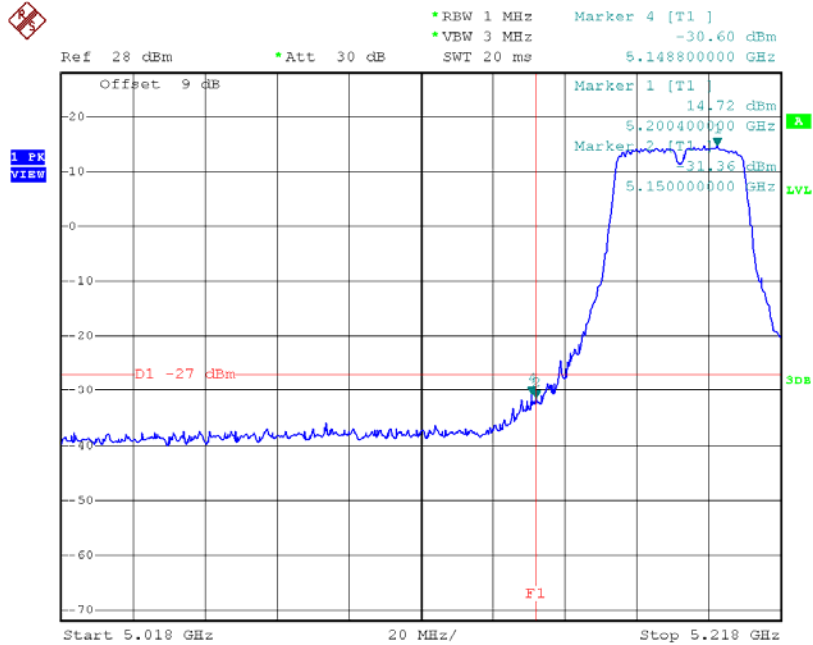

Date: 1.APR.2015 19:39:05


### TX mode CH46

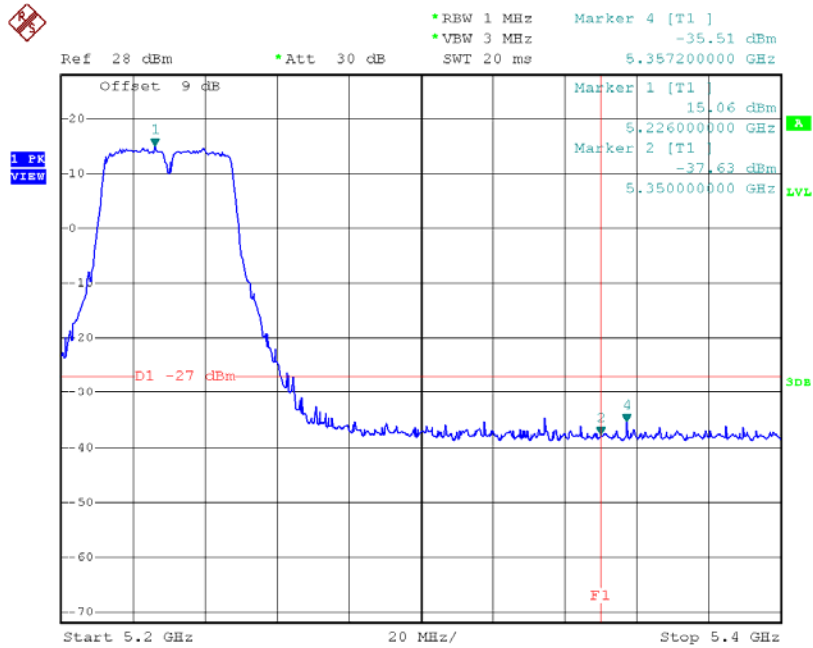

Date: 1.APR.2015 19:41:30


**Test Mode:** UNII-2A/TX A Mode

**TX mode CH52**

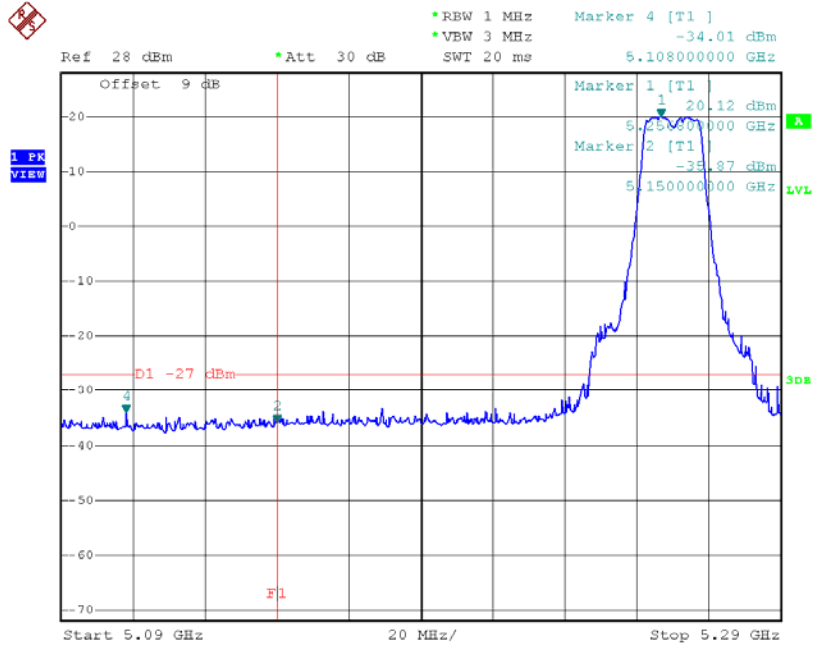

Date: 1.APR.2015 15:27:45

**TX mode CH64**

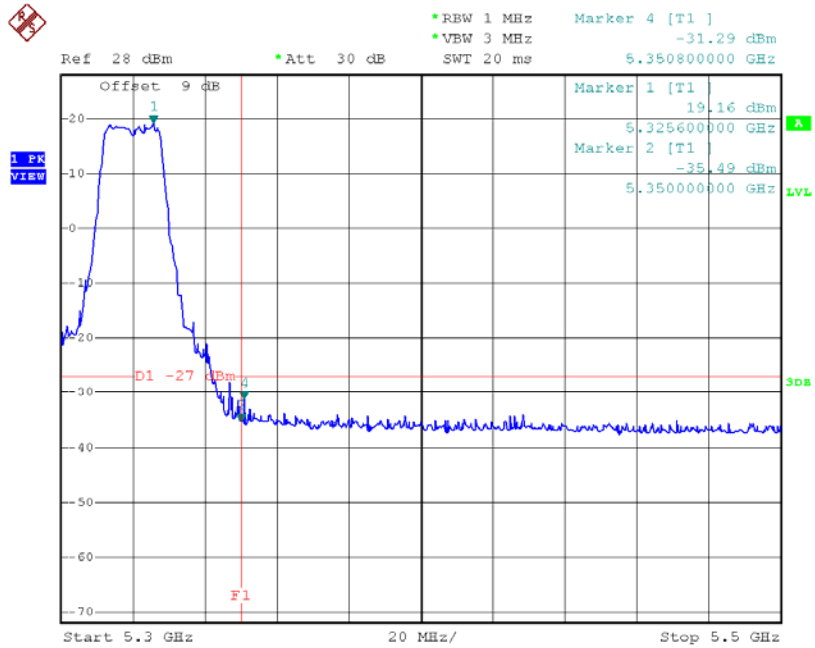


Date: 1.APR.2015 15:30:28




**Test Mode:** UNII-2A/TX N40 Mode

**TX mode CH54**

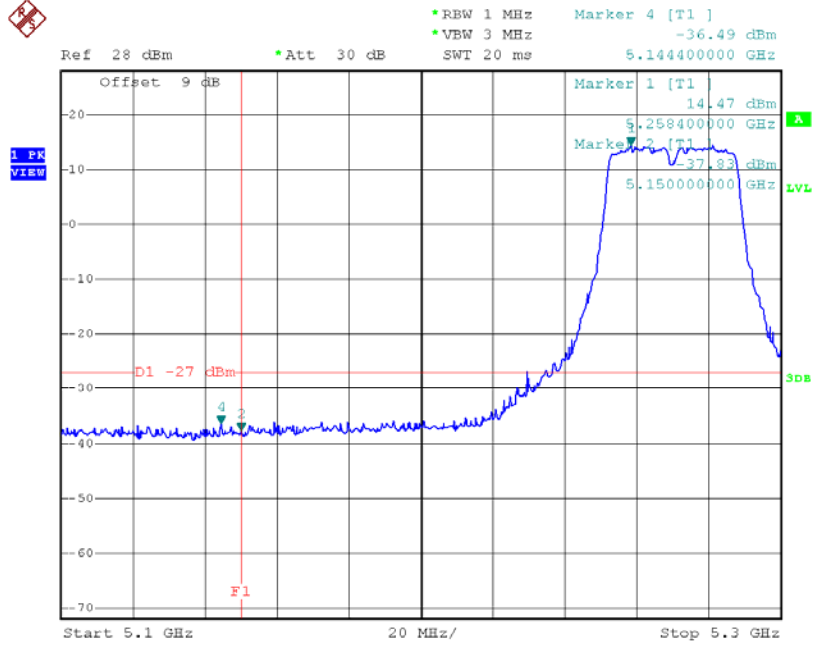

Date: 1.APR.2015 19:42:12


**TX mode CH62**

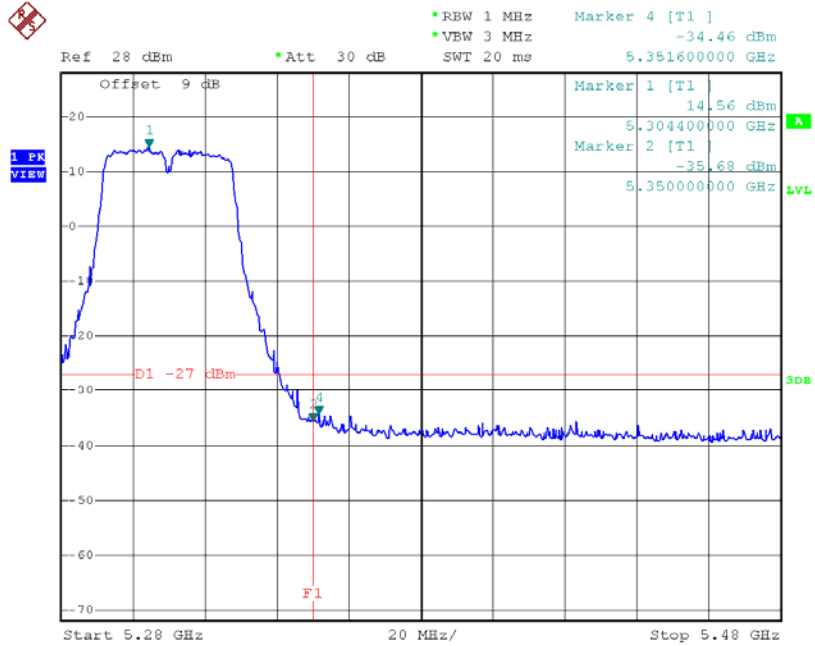

Date: 1.APR.2015 19:43:05


**Test Mode:** UNII-2C/TX A Mode

### TX mode CH100

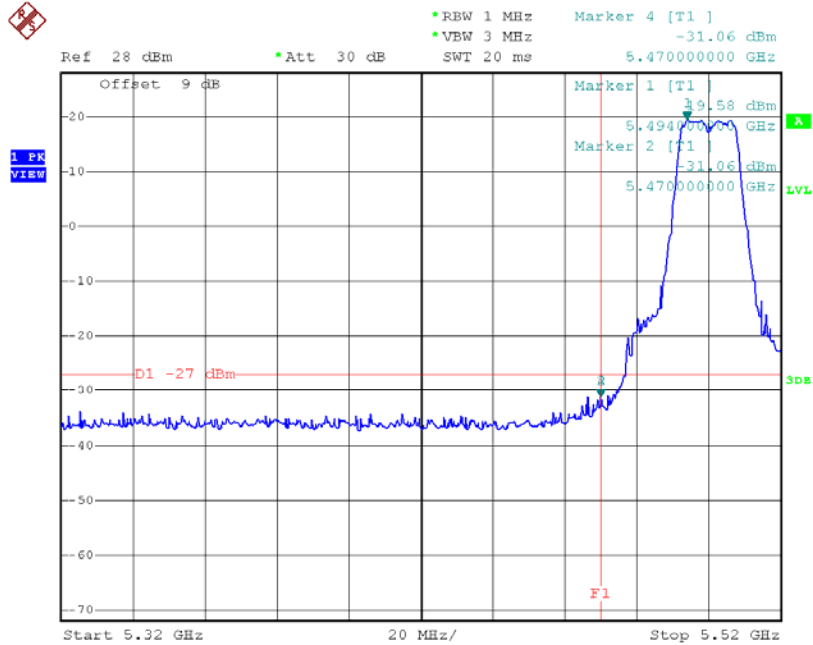

Date: 1.APR.2015 15:31:17


### TX mode CH140

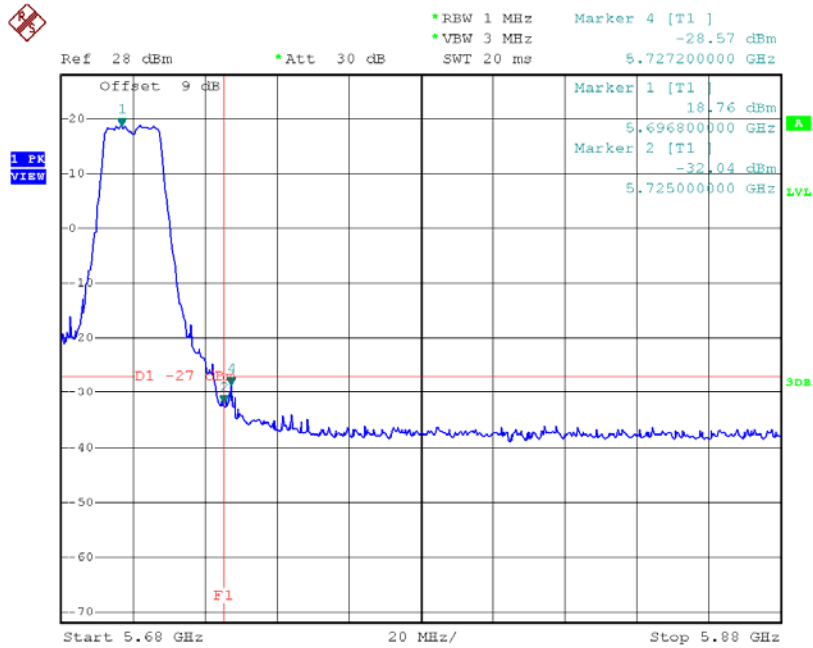

Date: 1.APR.2015 15:33:44


**Test Mode:** UNII-2C/TX N20 Mode

**TX mode CH100**

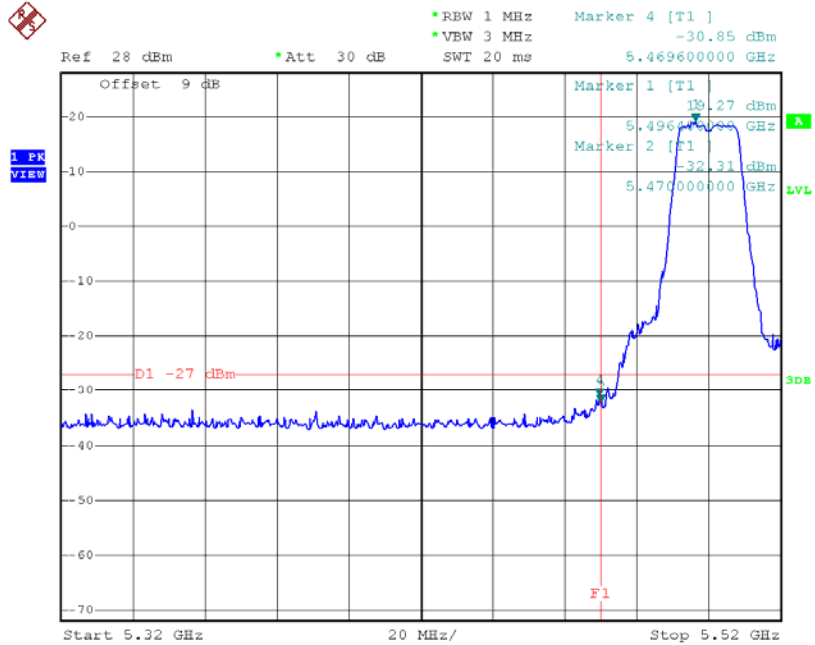

Date: 1.APR.2015 15:54:47


**TX mode CH140**

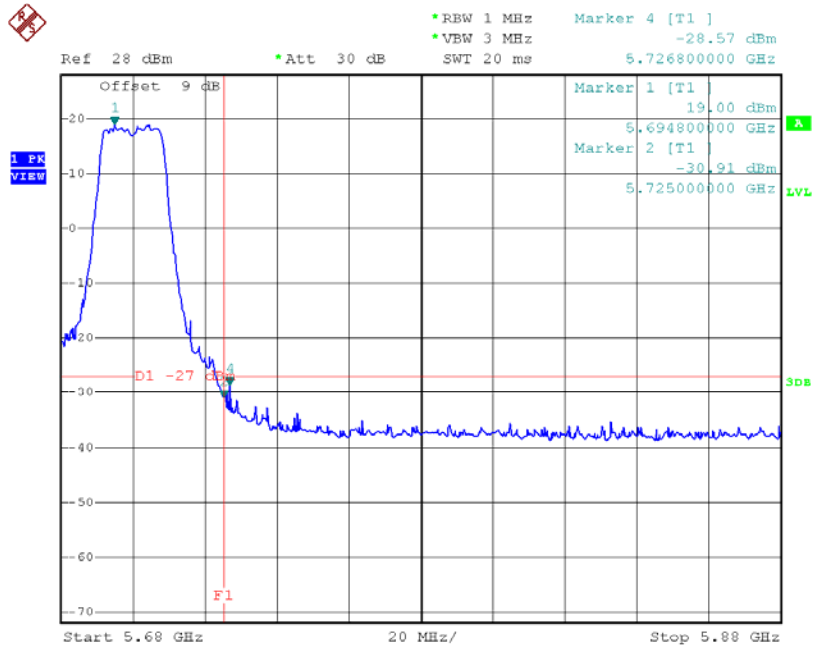

Date: 1.APR.2015 15:56:00


**Test Mode:** UNII-2C/TX N40 Mode

**TX mode CH102**

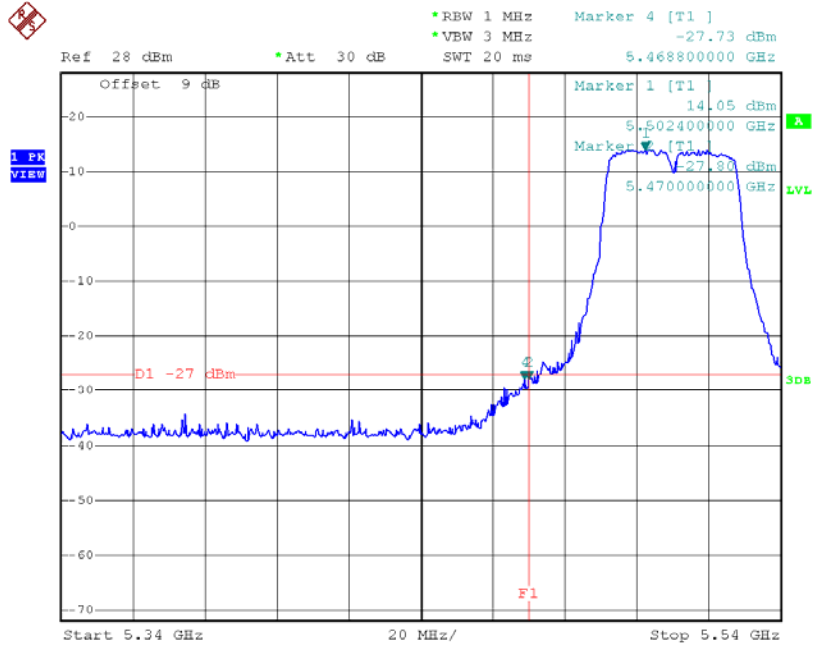

Date: 1.APR.2015 19:44:31


**TX mode CH134**

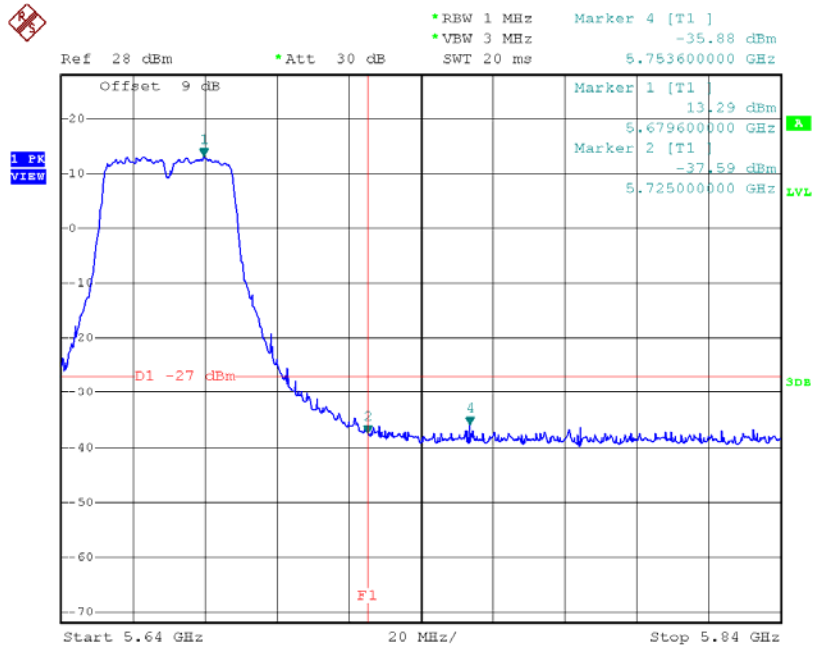

Date: 1.APR.2015 19:46:02


Test Mode: UNII-3/TX A Mode

### TX A Mode CH149

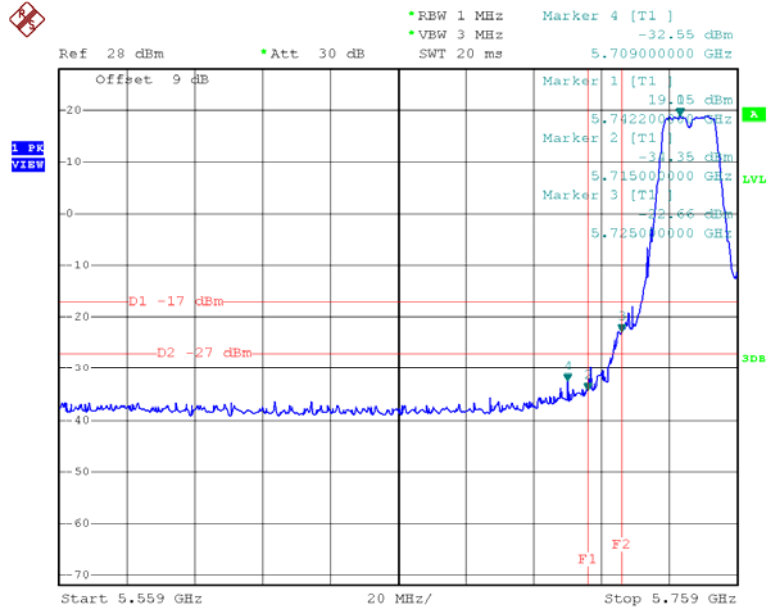

Date: 1.APR.2015 15:37:28

### TX A Mode CH165

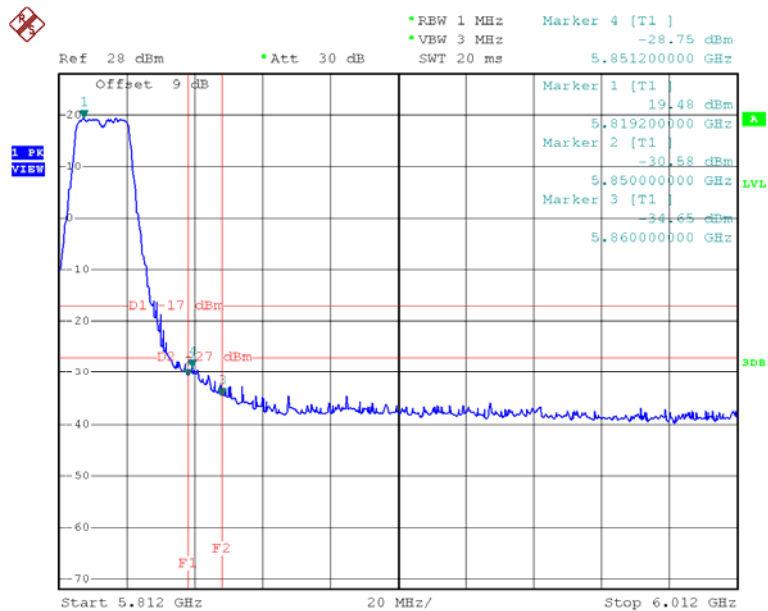


Date: 1.APR.2015 15:47:47




Test Mode: UNII-3/TX N40 Mode

UNII-3/TX HT40 mode CH151

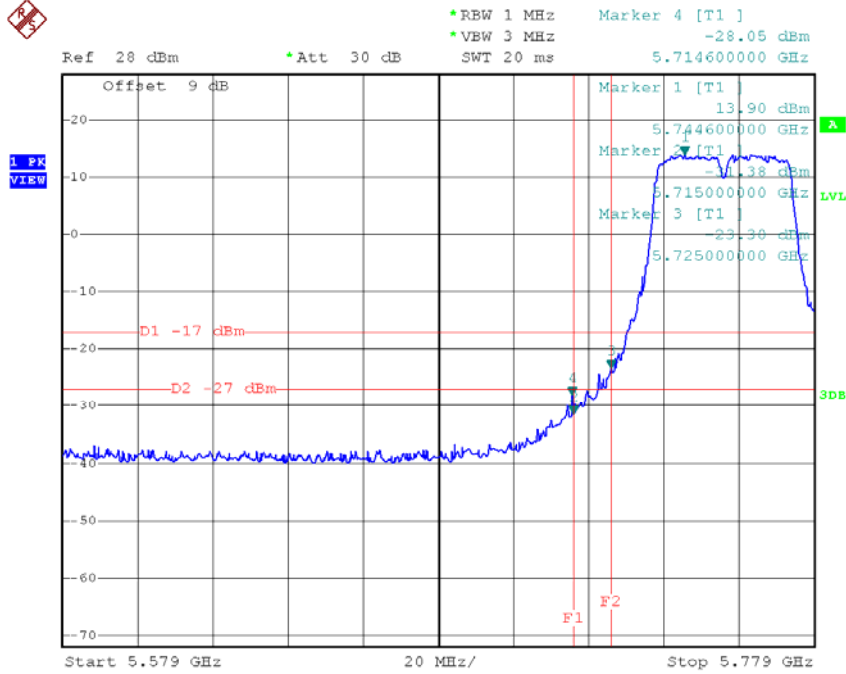

Date: 1.APR.2015 19:46:44


UNII-3/TX HT40 mode CH159

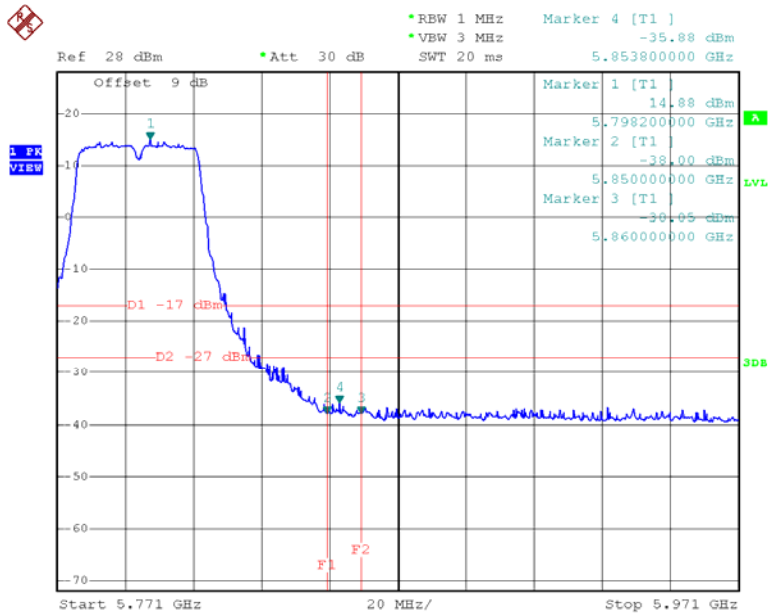

Date: 1.APR.2015 19:47:46


**Test Mode:** UNII-1/TX AC20 Mode

### TX mode CH36

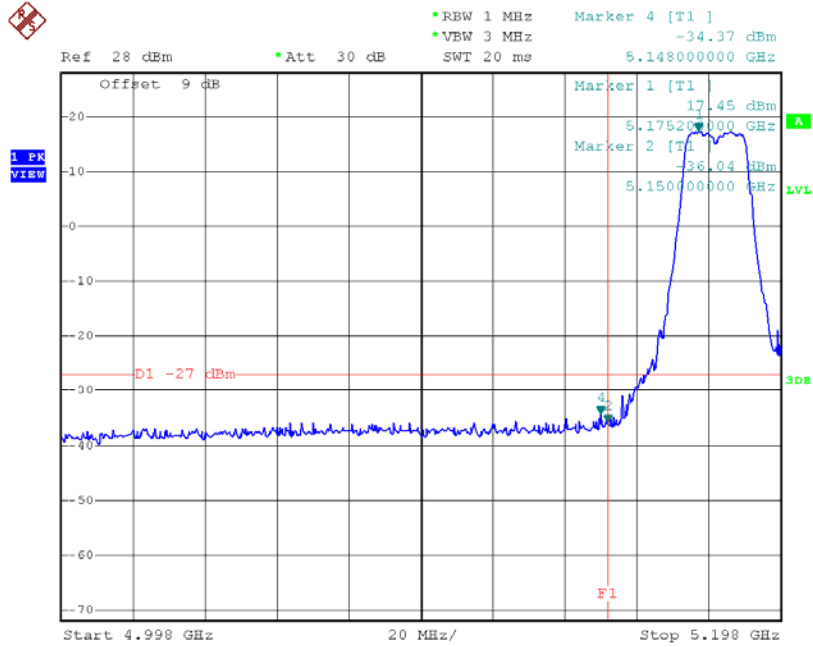

Date: 1.APR.2015 16:00:08


### TX mode CH48

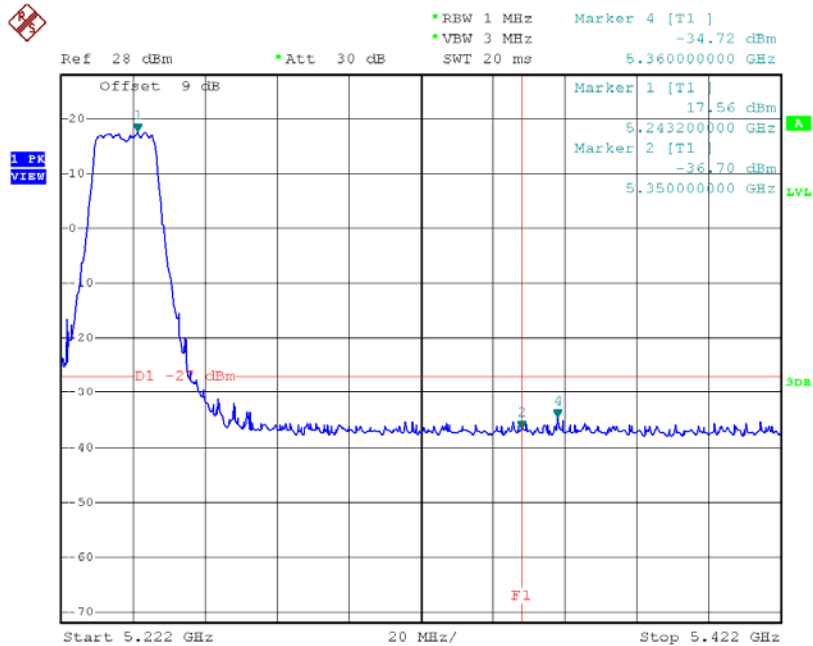

Date: 1.APR.2015 16:03:00


**Test Mode:** UNII-1/TX AC40 Mode

**TX mode CH38**

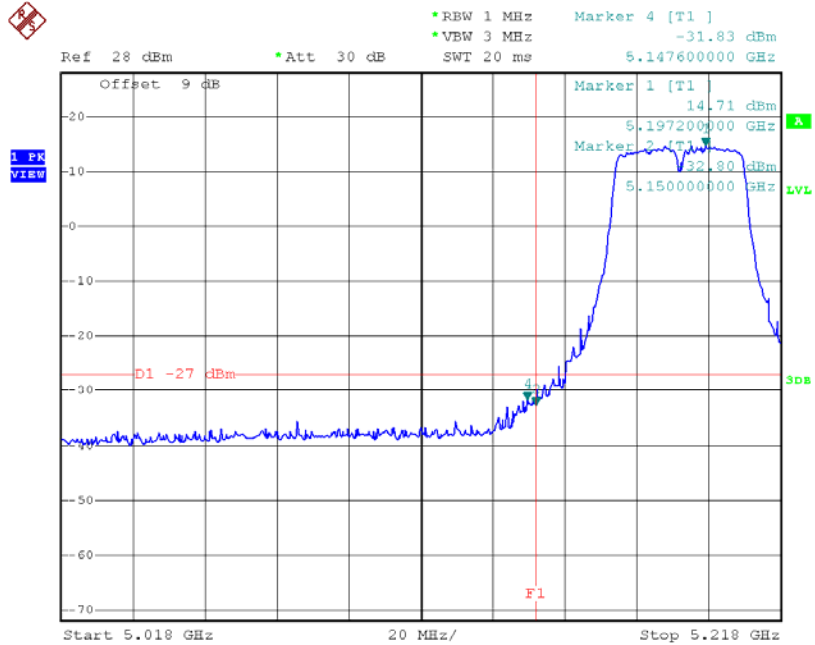

Date: 1.APR.2015 19:48:40


**TX mode CH46**

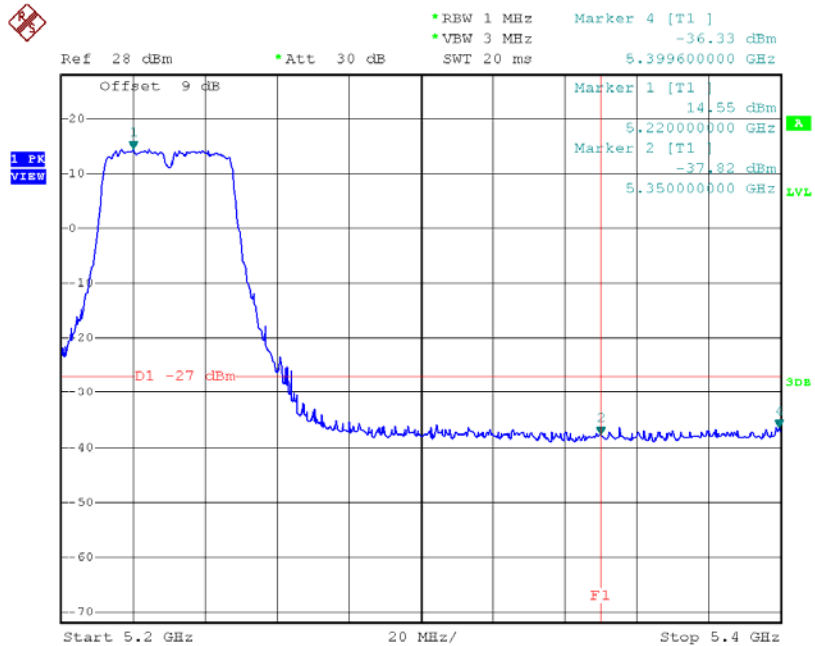


Date: 1.APR.2015 19:49:37

**Test Mode:** UNII-1/TX AC80 Mode

**TX mode CH42**

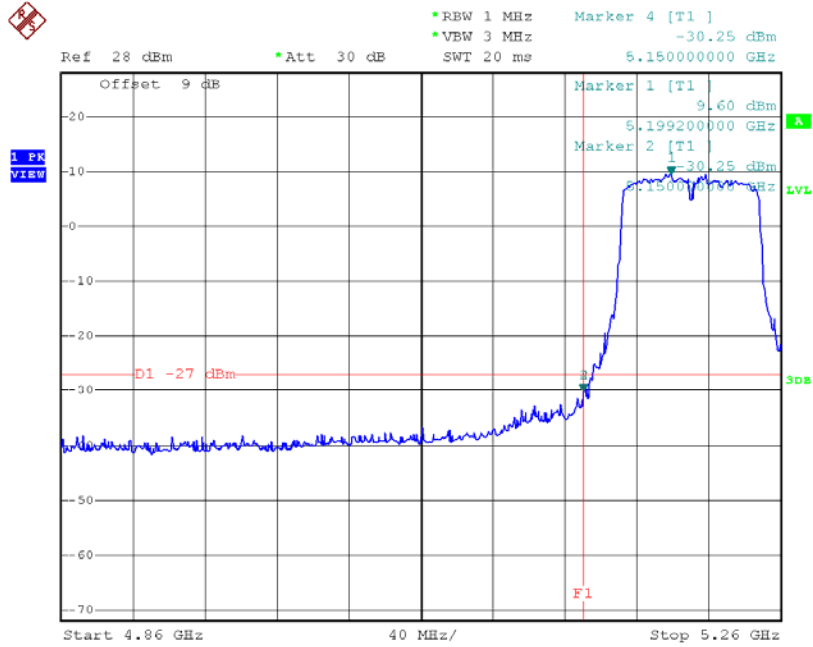


Date: 1.APR.2015 20:01:59

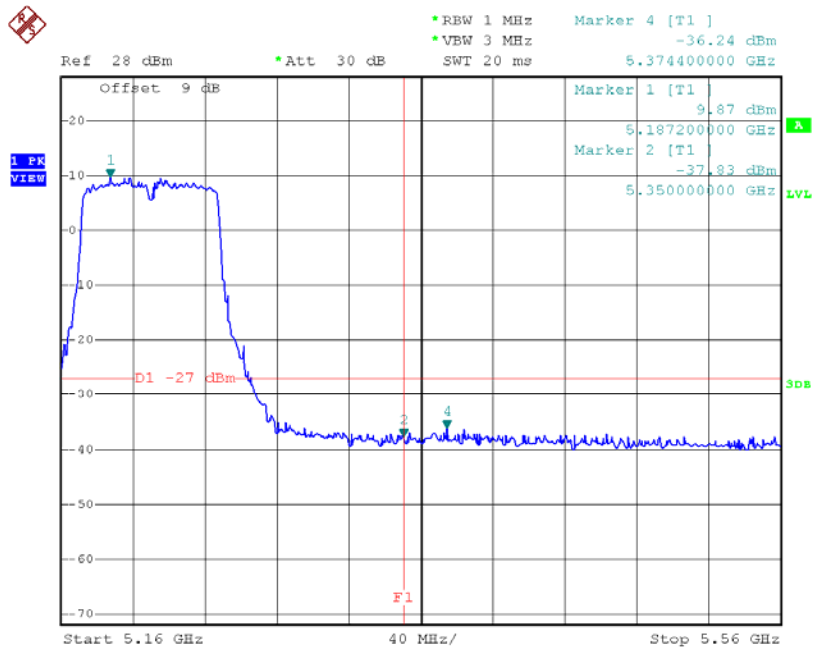

Date: 1.APR.2015 20:02:06


**Test Mode:** UNII-2A/TX AC20 Mode

### TX mode CH52

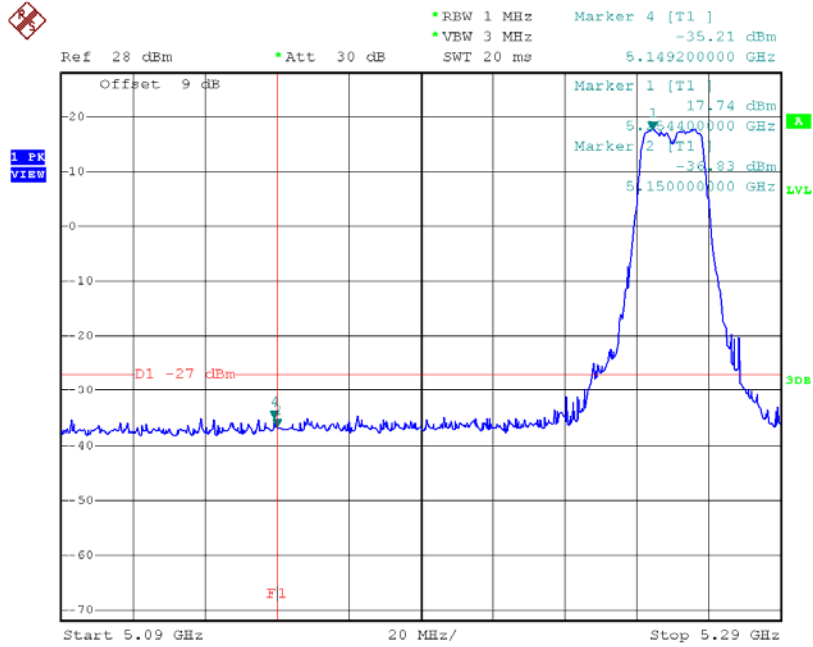

Date: 1.APR.2015 16:04:30


### TX mode CH64

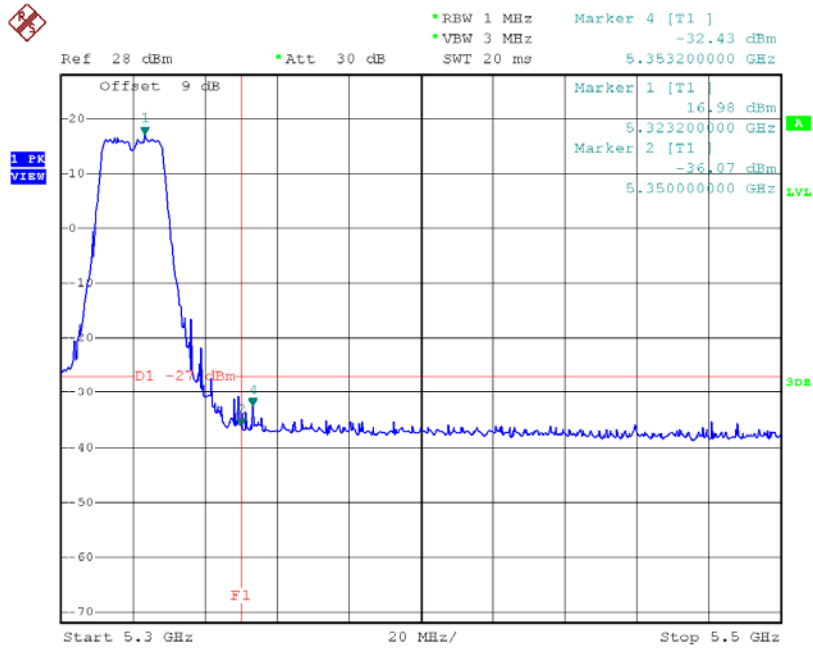

Date: 1.APR.2015 16:06:52


**Test Mode:** UNII-2A/TX AC40 Mode

### TX mode CH54

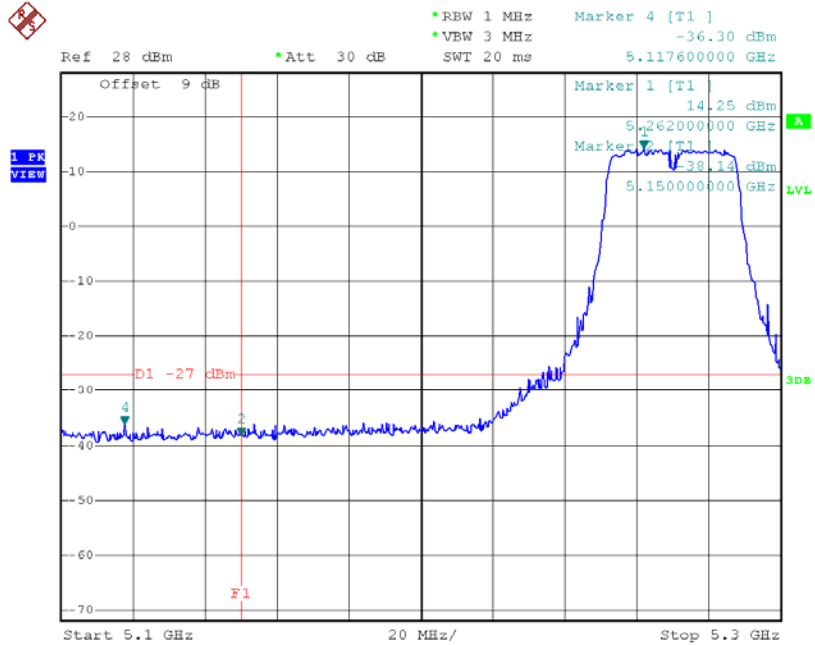

Date: 1.APR.2015 19:50:26


### TX mode CH62

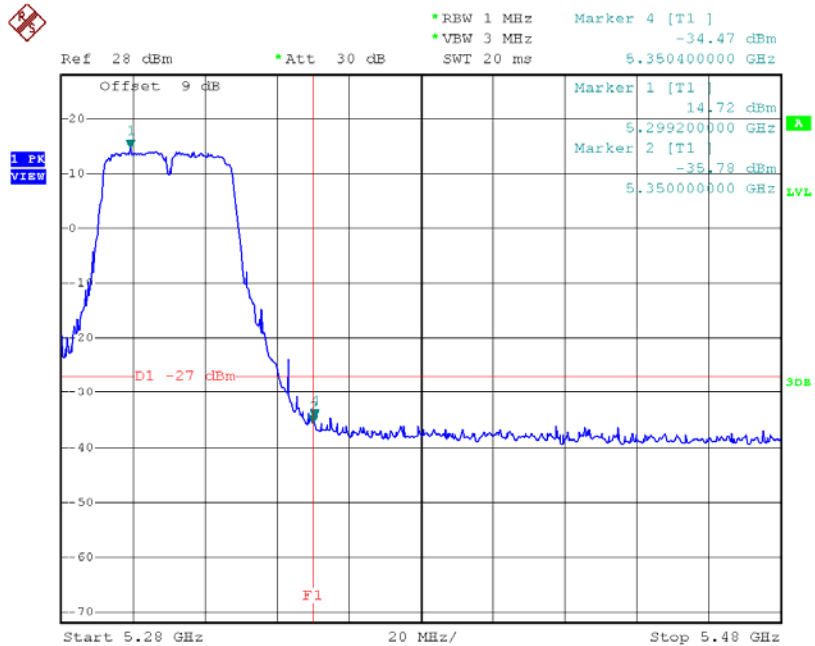


Date: 1.APR.2015 19:51:04

**Test Mode:** UNII-2A/TX AC80 Mode

**TX mode CH58**

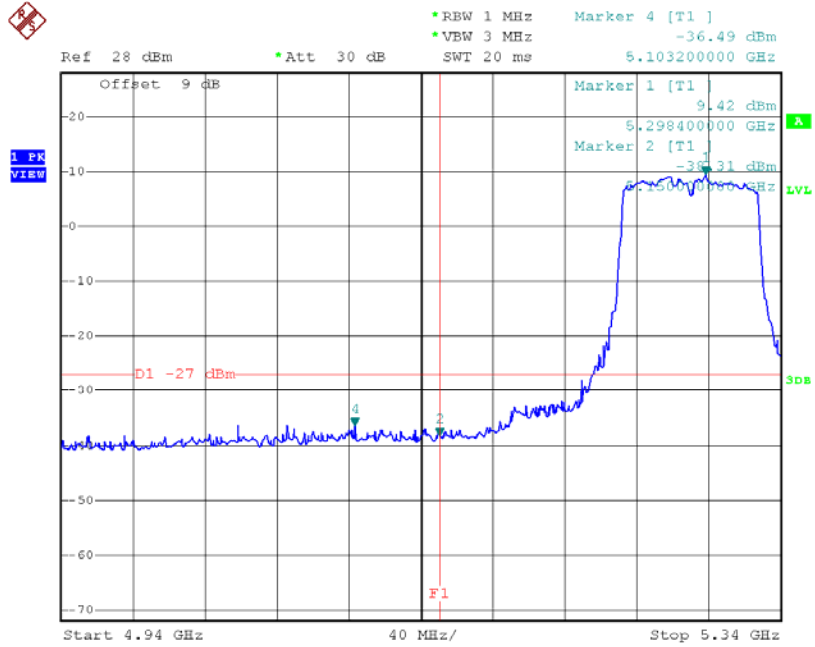


Date: 1.APR.2015 20:03:07

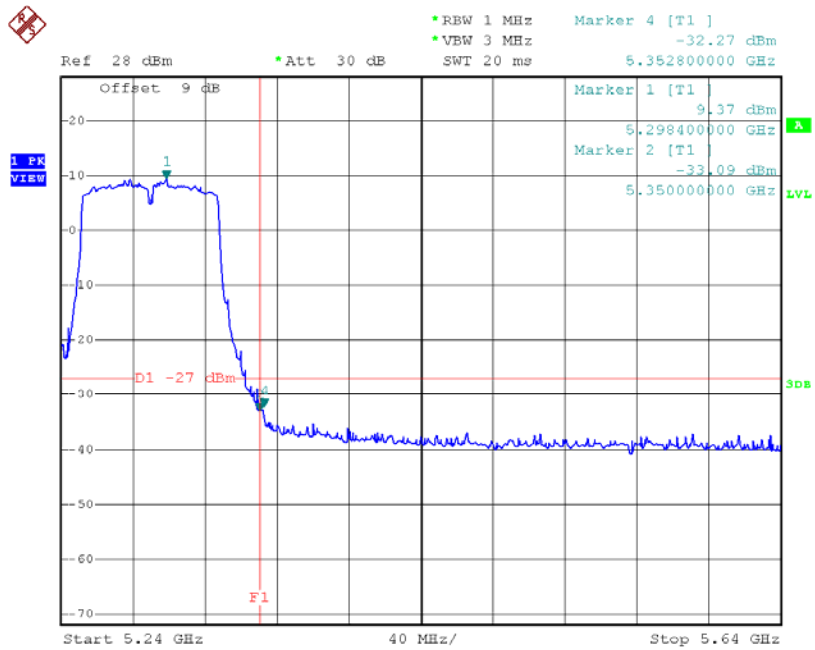

Date: 1.APR.2015 20:03:23


**Test Mode:** UNII-2C/TX AC20 Mode

**TX mode CH100**

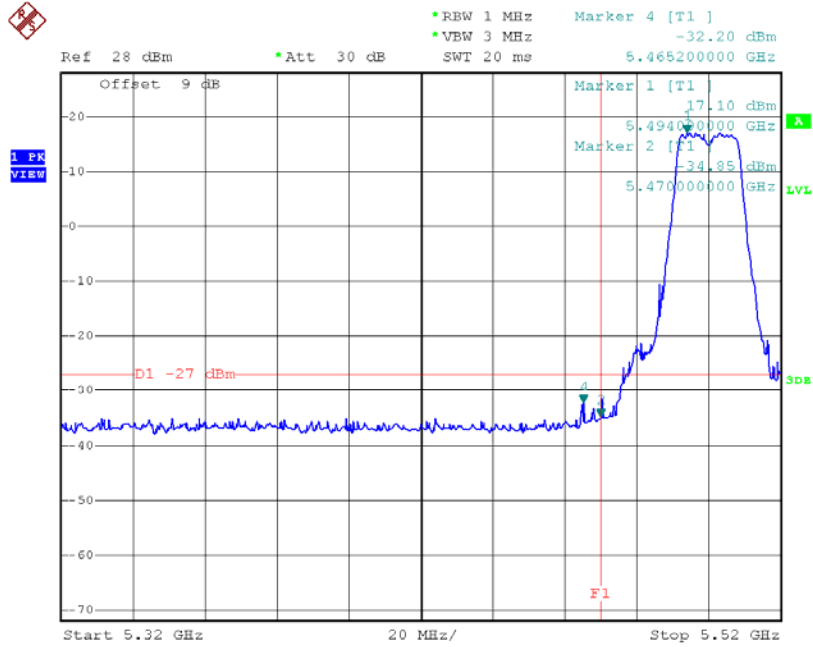

Date: 1.APR.2015 16:08:54


**TX mode CH140**

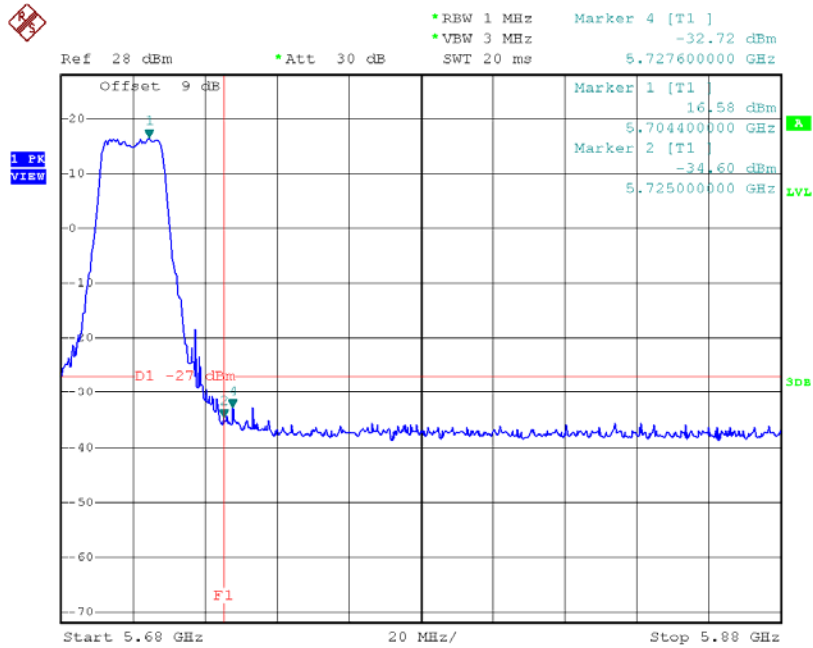

Date: 1.APR.2015 16:10:06


**Test Mode:** UNII-2C/TX AC40 Mode

**TX mode CH102**

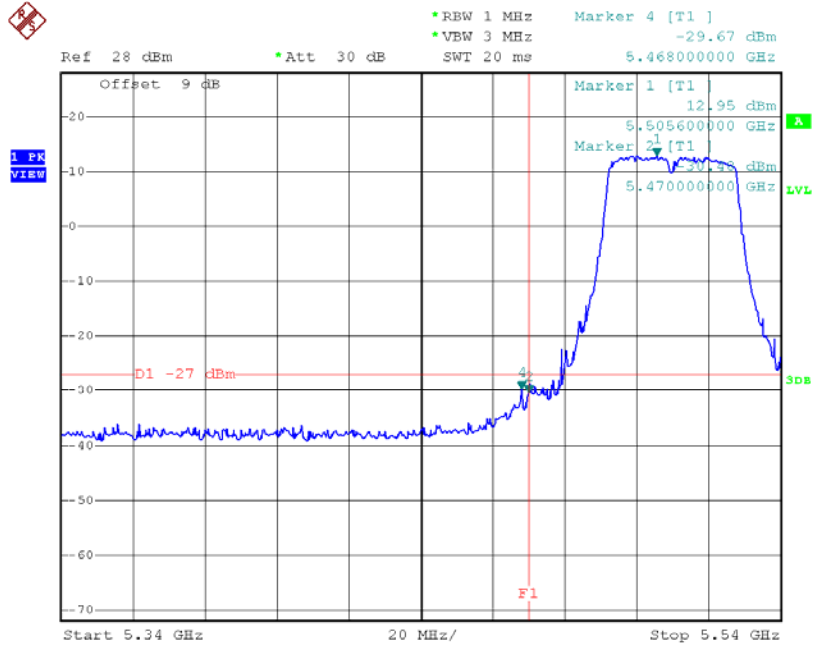

Date: 1.APR.2015 19:56:11


**TX mode CH134**

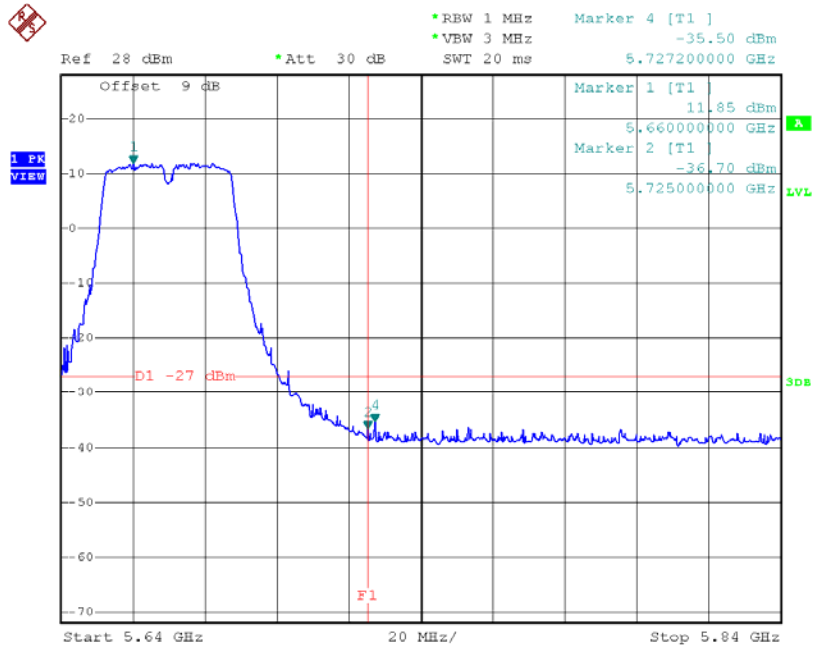

Date: 1.APR.2015 19:58:10


**Test Mode:** UNII-2C/TX AC80 Mode

**TX mode CH106**

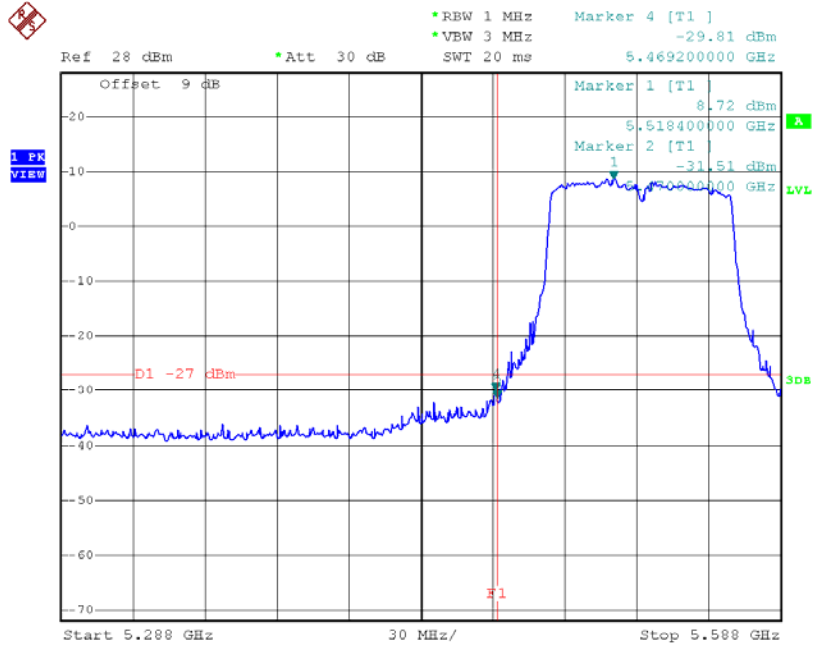

Date: 1.APR.2015 20:04:20


**TX mode CH122**

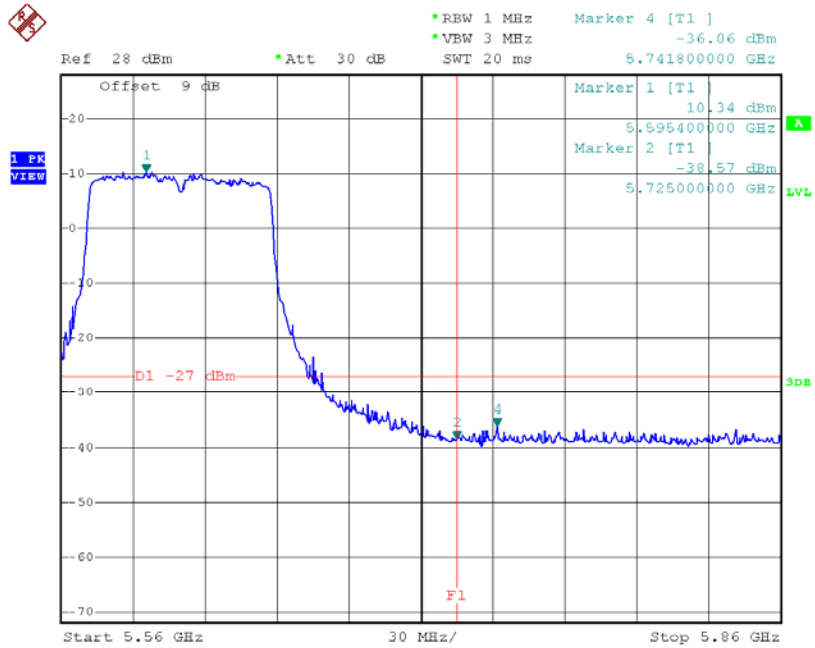

Date: 1.APR.2015 20:05:29


Test Mode: UNII-3/TX AC20 Mode

### TX AC HT20 mode CH149

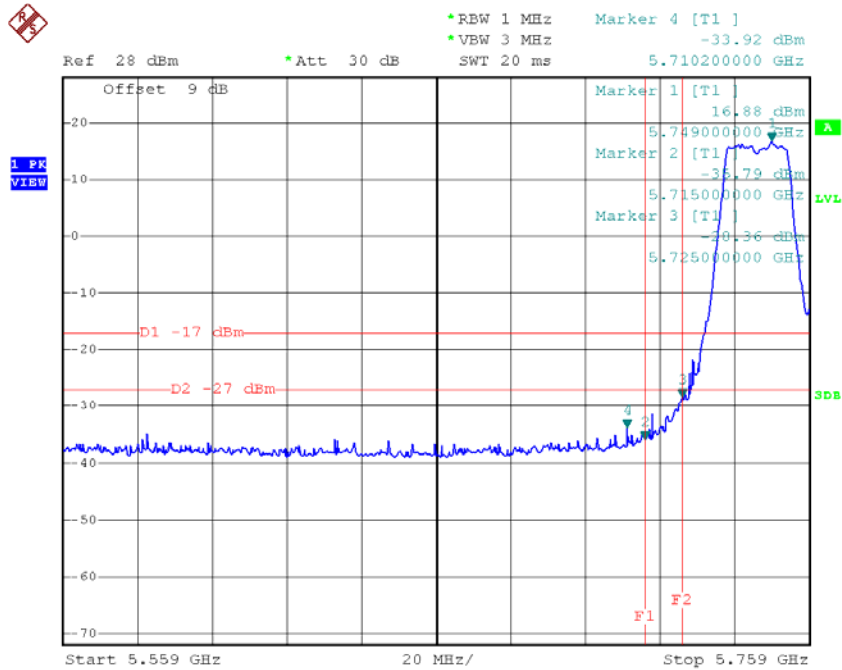

Date: 1.APR.2015 16:11:14


### TX AC HT20 mode CH165

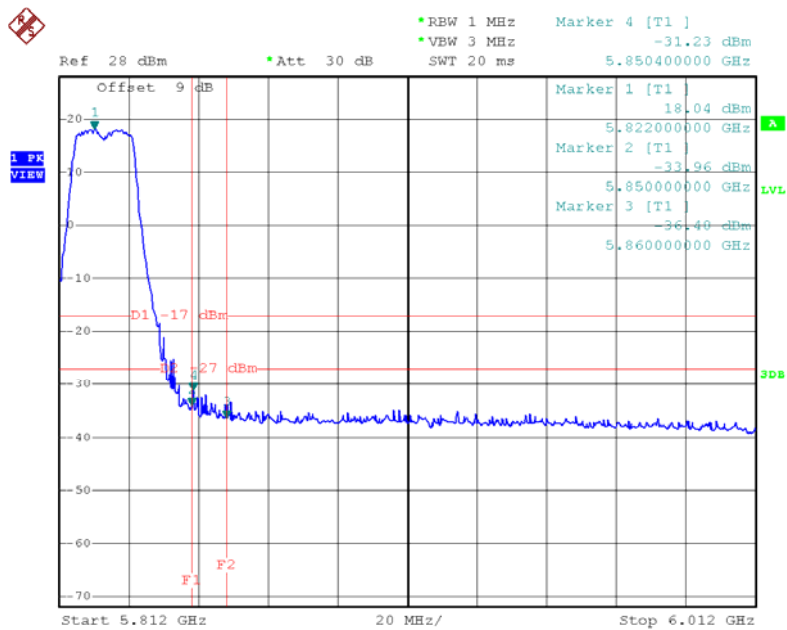

Date: 1.APR.2015 19:38:07


Test Mode: UNII-3/TX AC40 Mode

### TX AC HT40 mode CH151

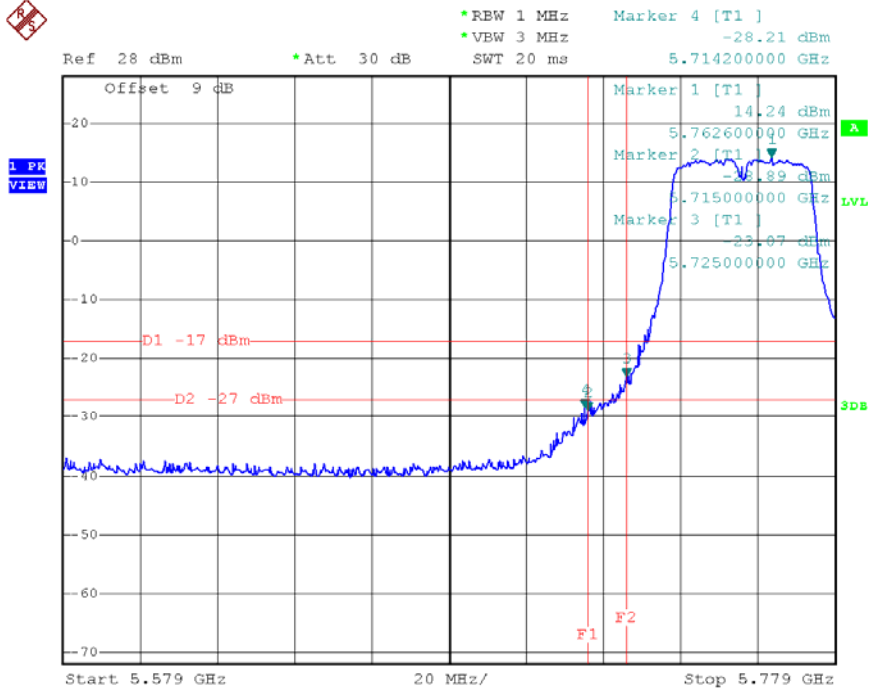

Date: 1.APR.2015 19:59:04


### TX AC HT40 mode CH159

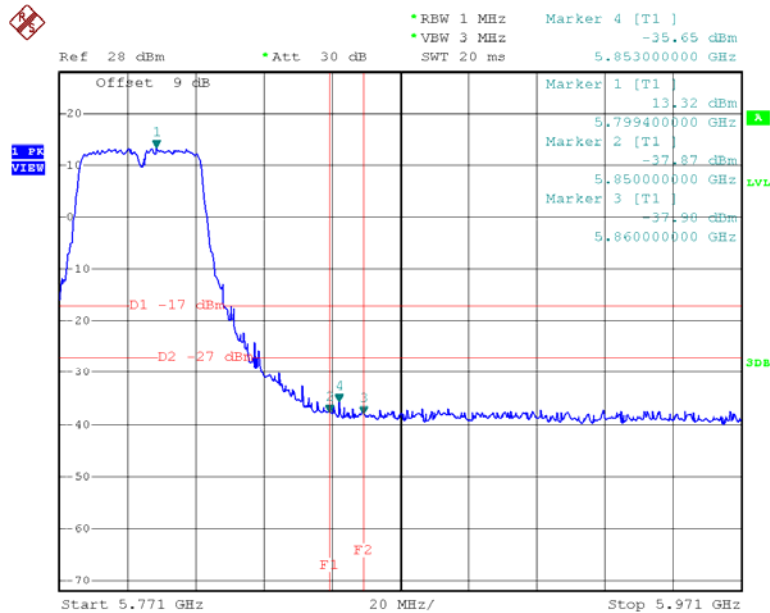


Date: 1.APR.2015 19:59:47

Test Mode: UNII-3/TX AC80 Mode

TX AC HT80 mode CH155

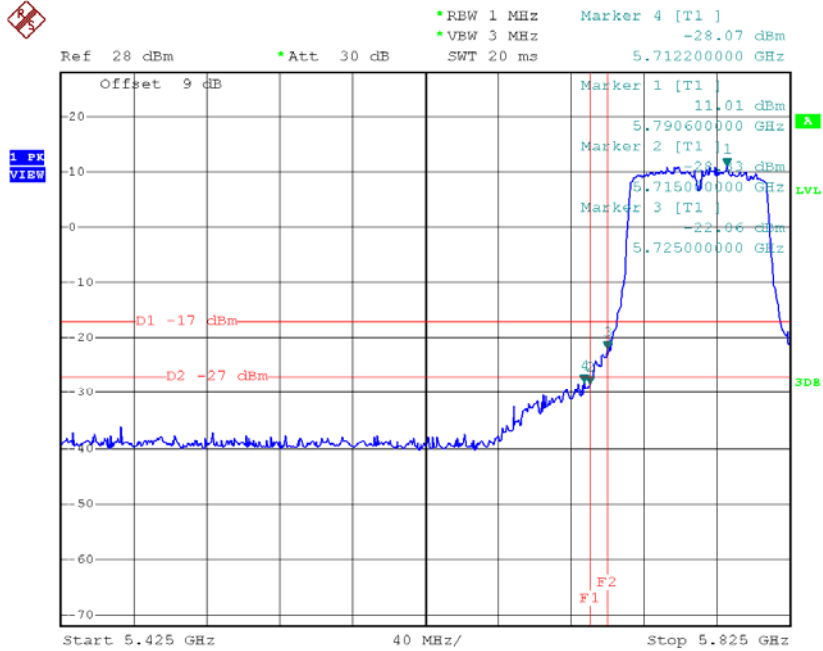

Date: 1.APR.2015 20:06:22

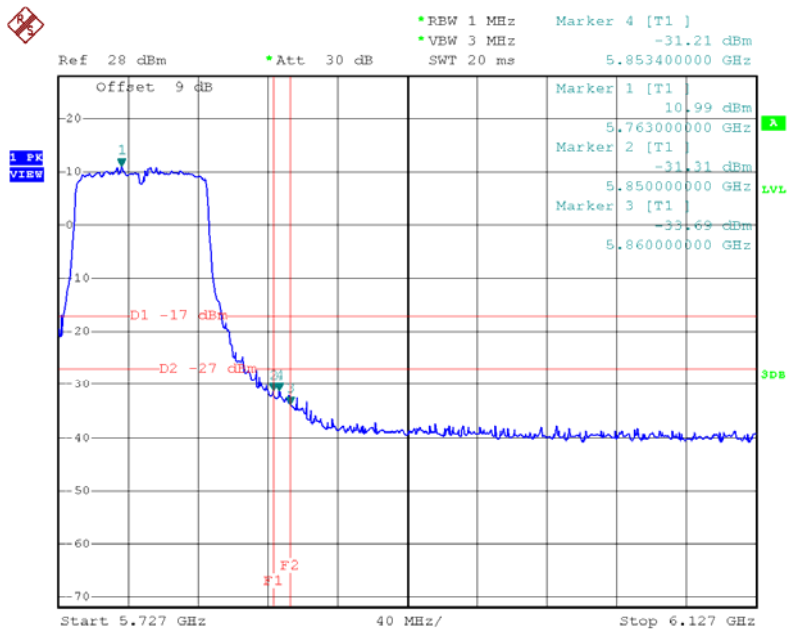


Date: 1.APR.2015 20:06:29

# For 2TX


Test Mode: UNII-1/TX A Mode\_ANT 1

## TX mode CH36

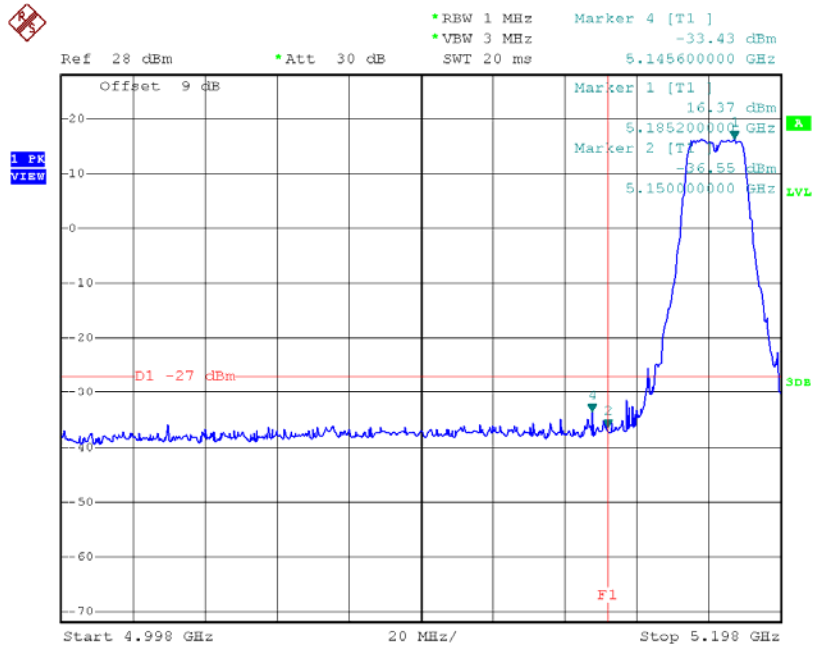

Date: 1.APR.2015 21:25:15


## TX mode CH48

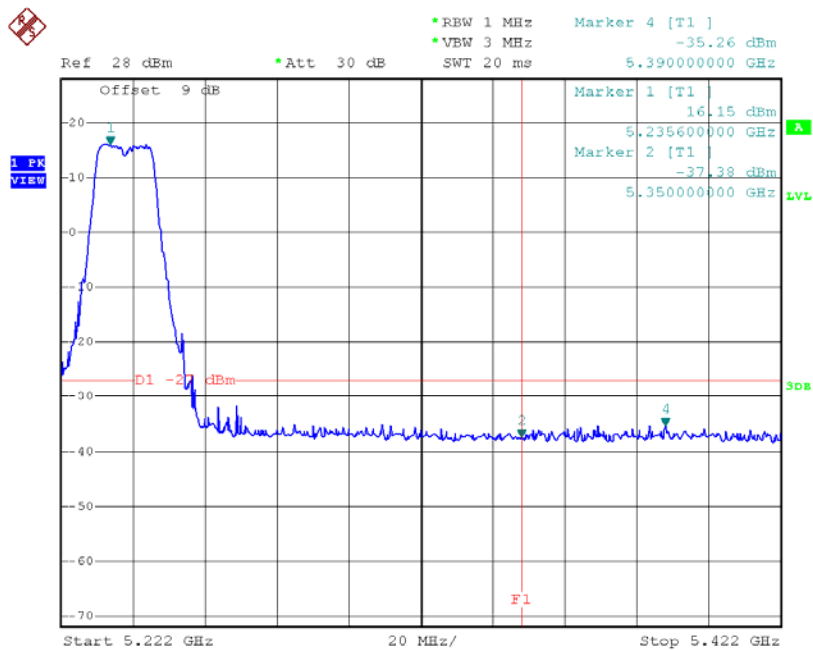

Date: 1.APR.2015 20:34:19


**Test Mode:** UNII-1/TX A Mode\_ANT 2

### TX mode CH36

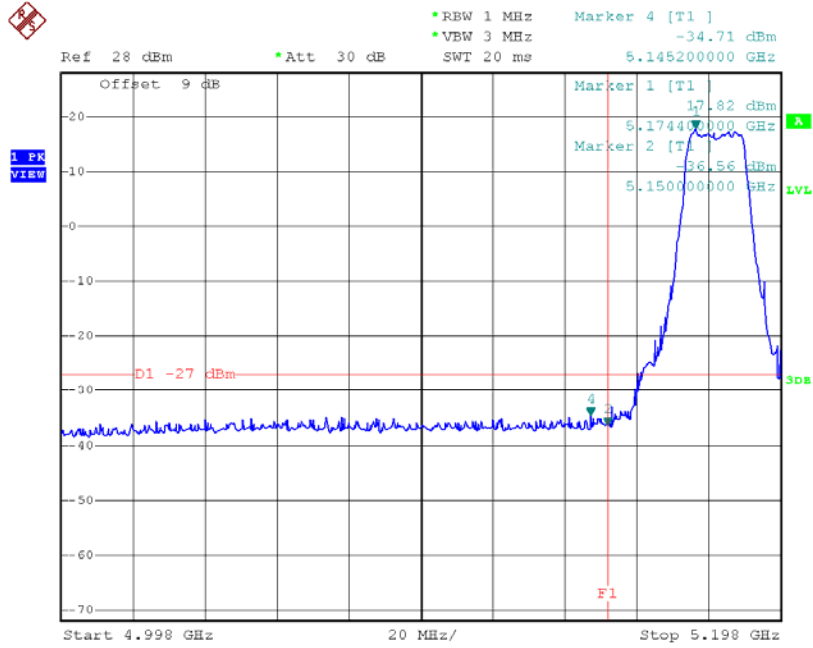

Date: 1.APR.2015 21:29:25


### TX mode CH48

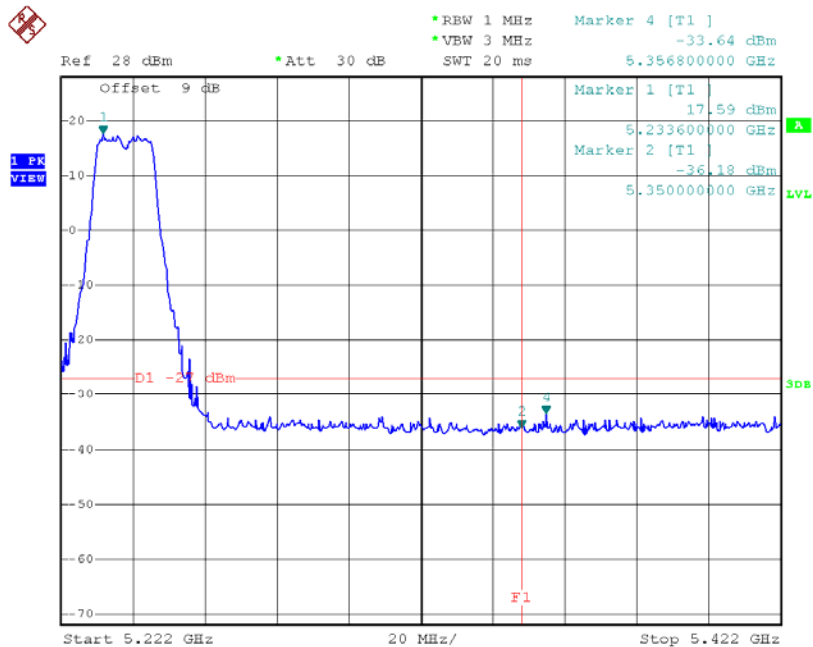

Date: 1.APR.2015 21:30:50


Test Mode: UNII-1/TX N20 Mode\_ANT 1

### TX mode CH36

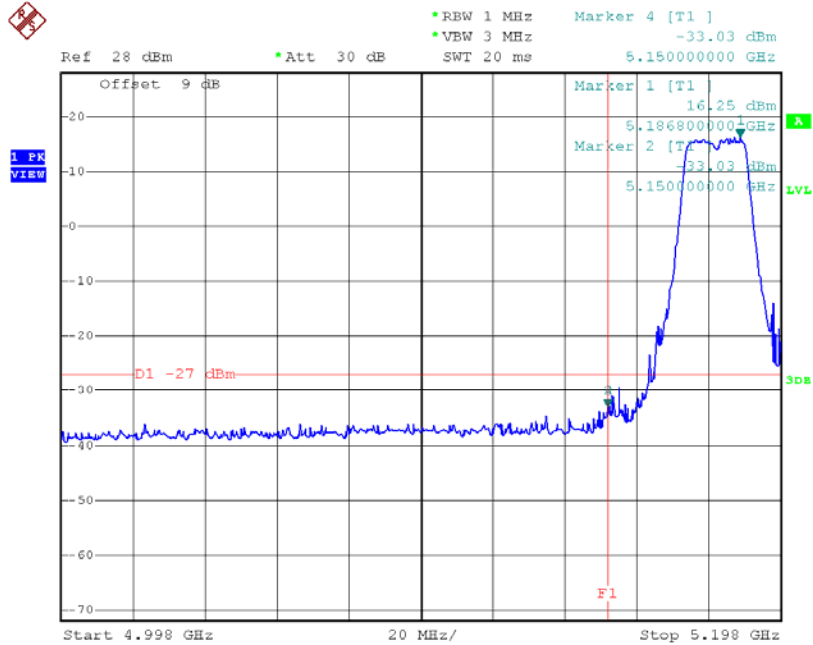

Date: 1.APR.2015 20:42:02


### TX mode CH48

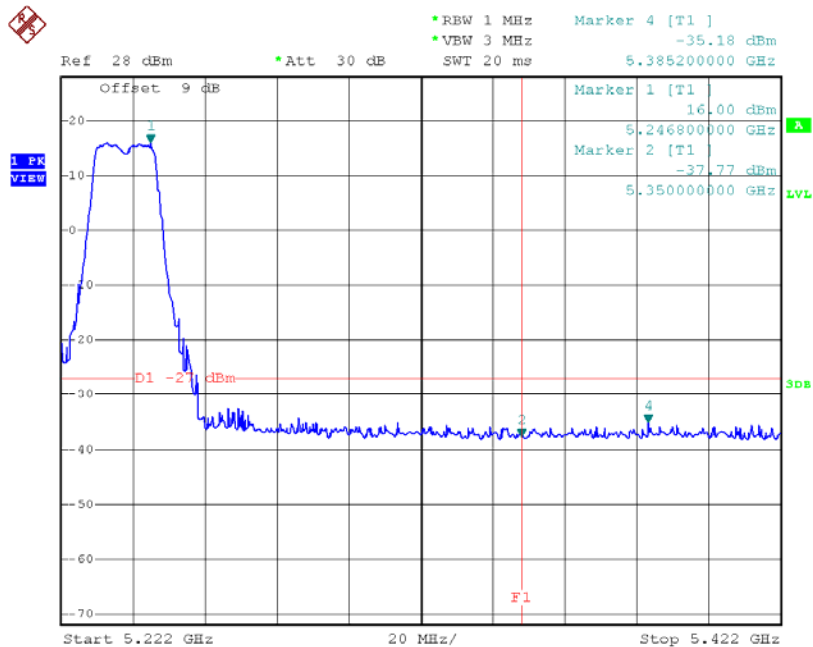

Date: 1.APR.2015 20:42:57


**Test Mode:** UNII-1/TX N20 Mode\_ANT 2

**TX mode CH36**

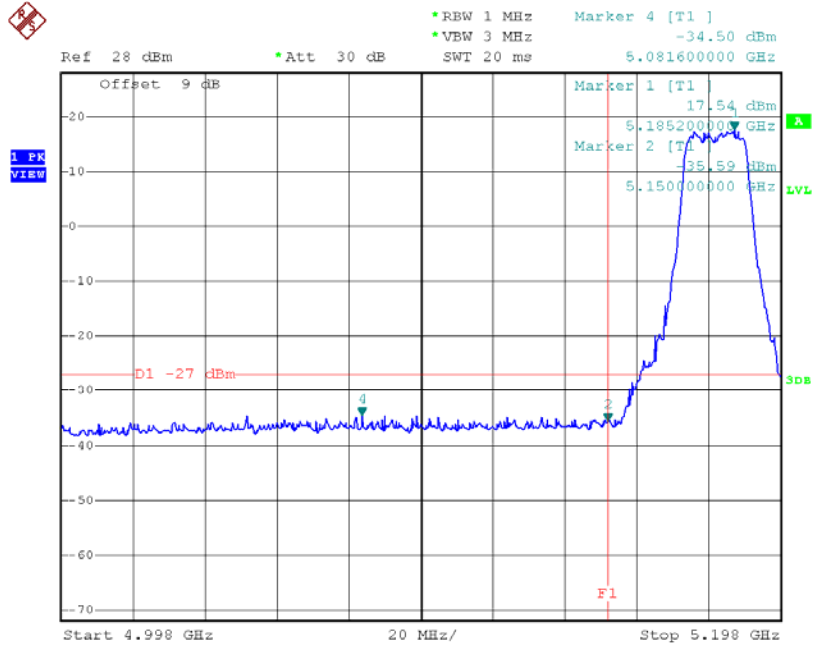

Date: 1.APR.2015 21:37:55


**TX mode CH48**

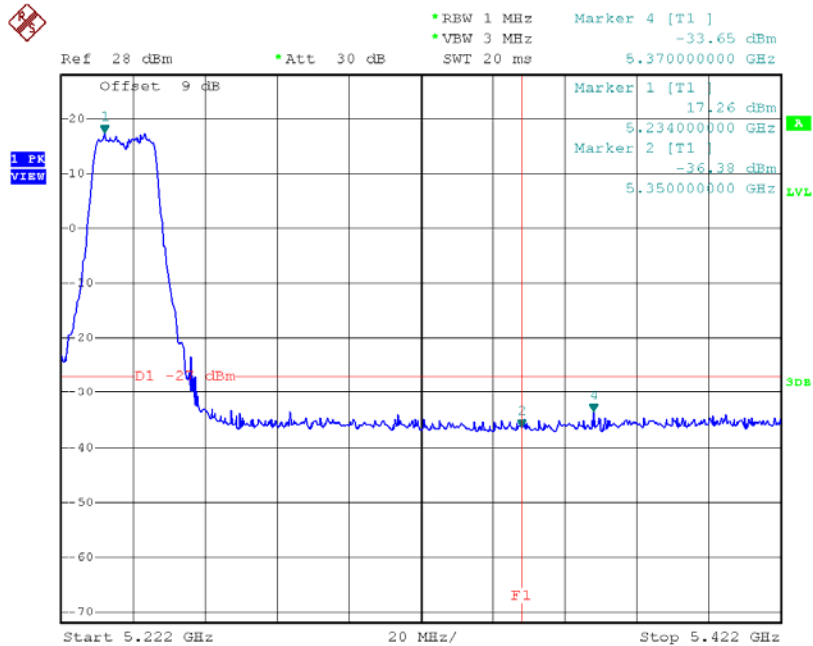

Date: 1.APR.2015 21:38:56


**Test Mode:** UNII-1/TX N40 Mode\_ANT 1

### TX mode CH38

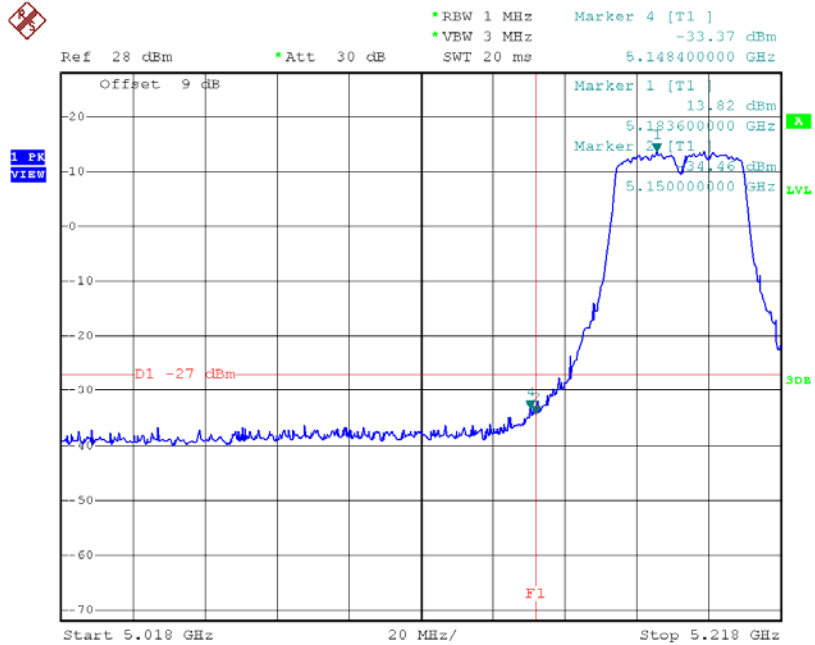

Date: 1.APR.2015 20:53:17


### TX mode CH46

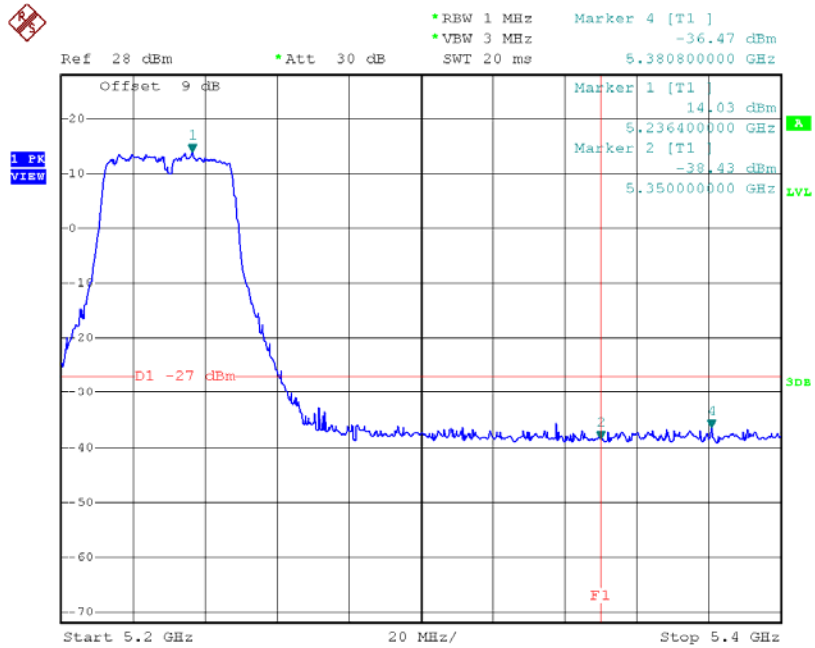

Date: 1.APR.2015 20:53:47


**Test Mode:** UNII-1/TX N40 Mode\_ANT 2

**TX mode CH38**

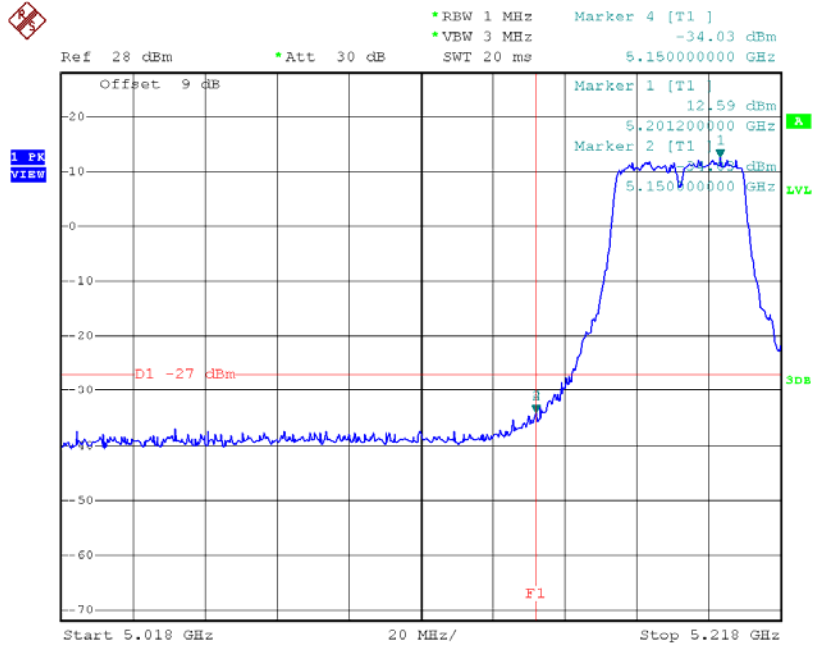

Date: 1.APR.2015 21:48:15


**TX mode CH46**

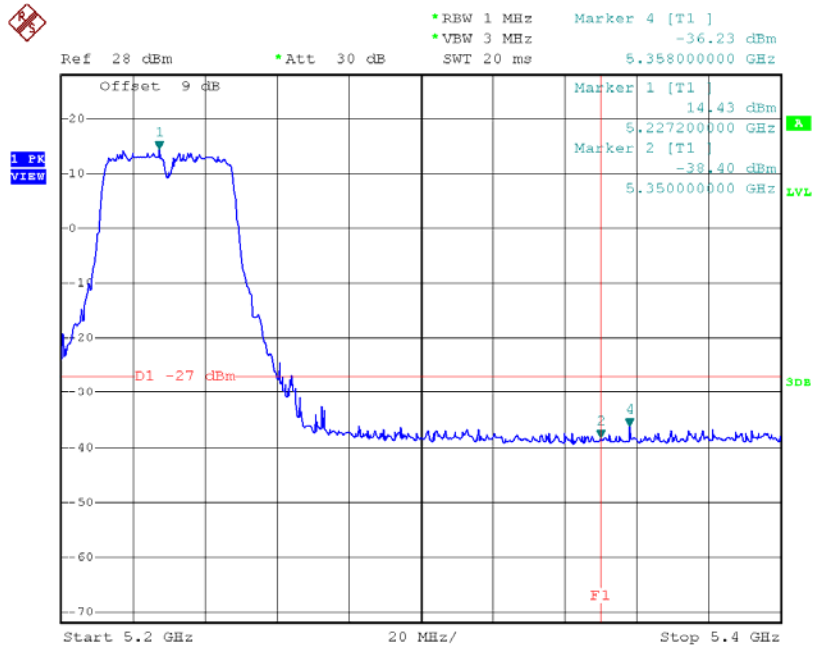

Date: 1.APR.2015 21:48:45


**Test Mode:** UNII-2A/TX A Mode\_ANT 1

### TX mode CH52

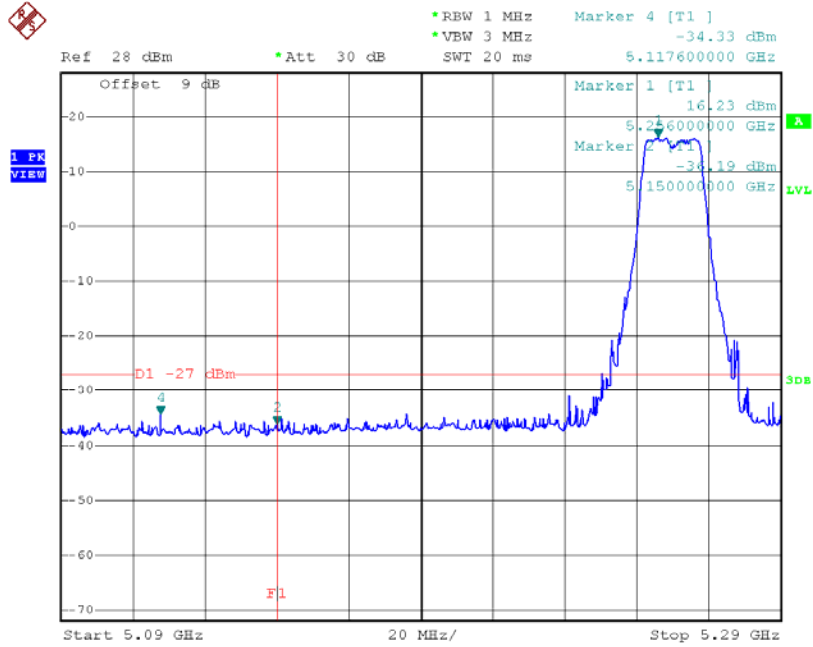

Date: 1.APR.2015 20:35:19

### TX mode CH64

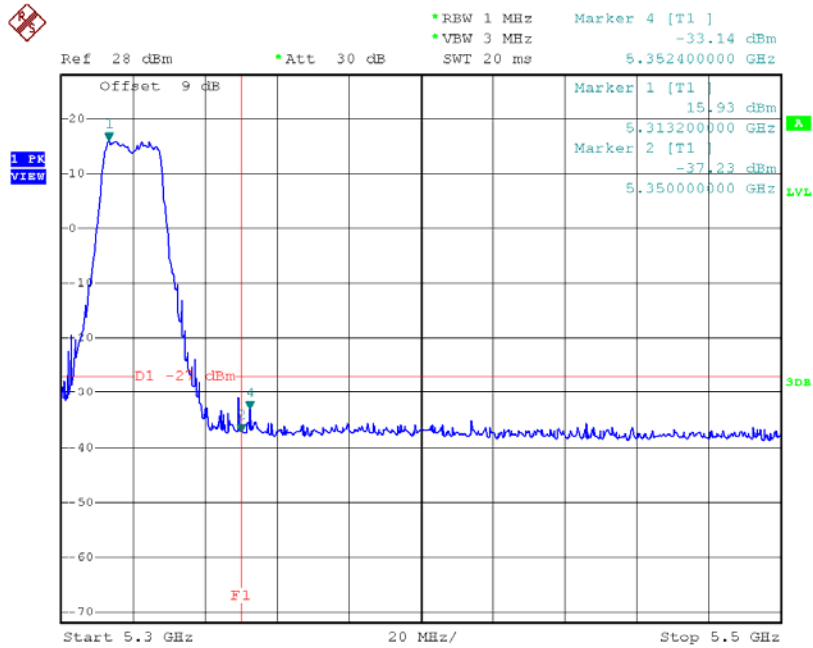


Date: 1.APR.2015 20:36:41




Test Mode: UNII-2A/TX N20 Mode\_ANT 1

### TX mode CH52

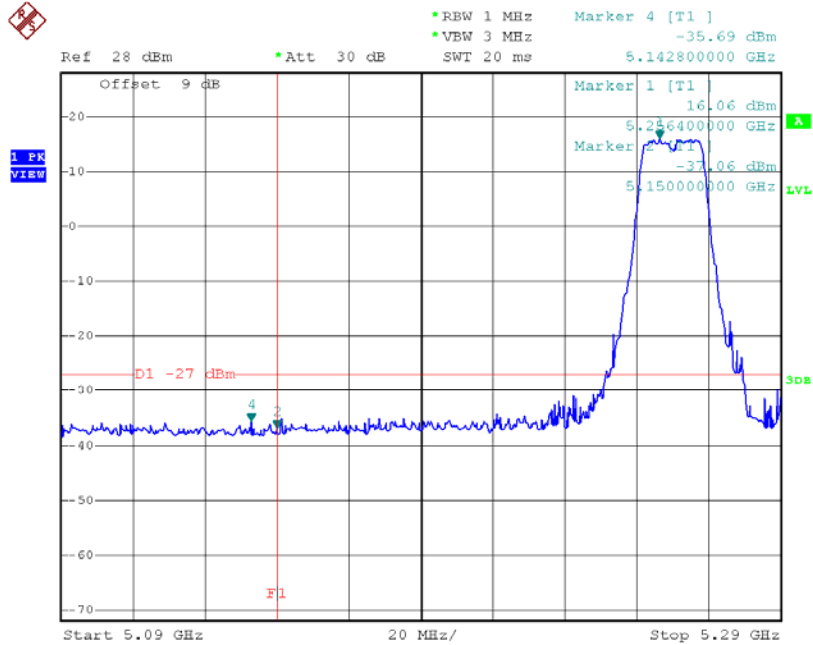

Date: 1.APR.2015 20:43:35


### TX mode CH64

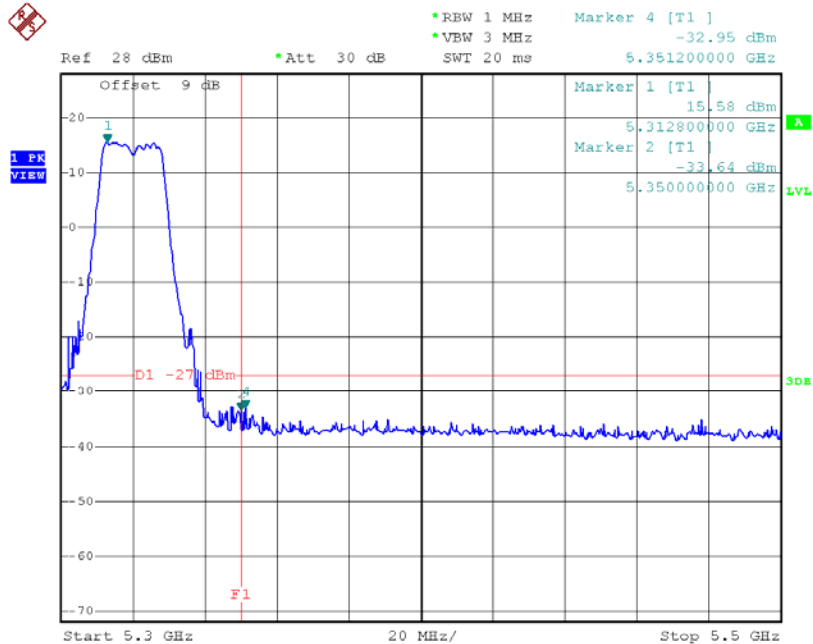

Date: 1.APR.2015 20:44:20


Test Mode: UNII-2A/TX N20 Mode\_ANT 2

### TX mode CH52

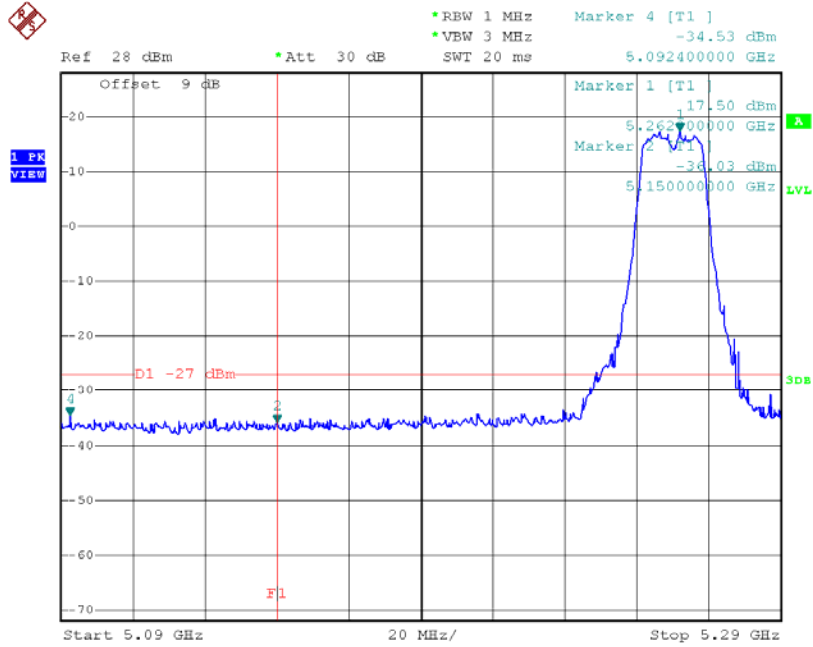

Date: 1.APR.2015 21:39:20


### TX mode CH64

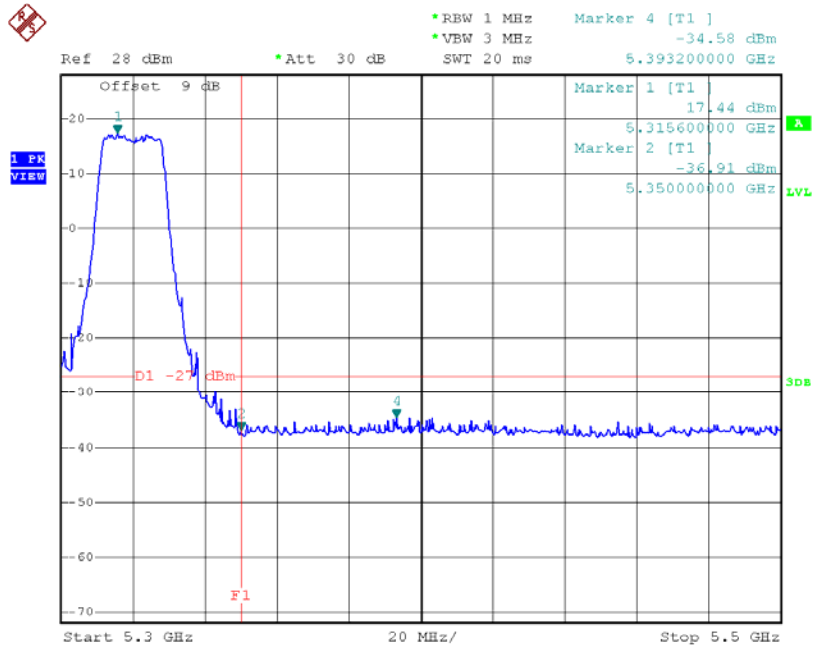

Date: 1.APR.2015 21:40:05


**Test Mode:** UNII-2A/TX N40 Mode\_ANT 1

### TX mode CH54

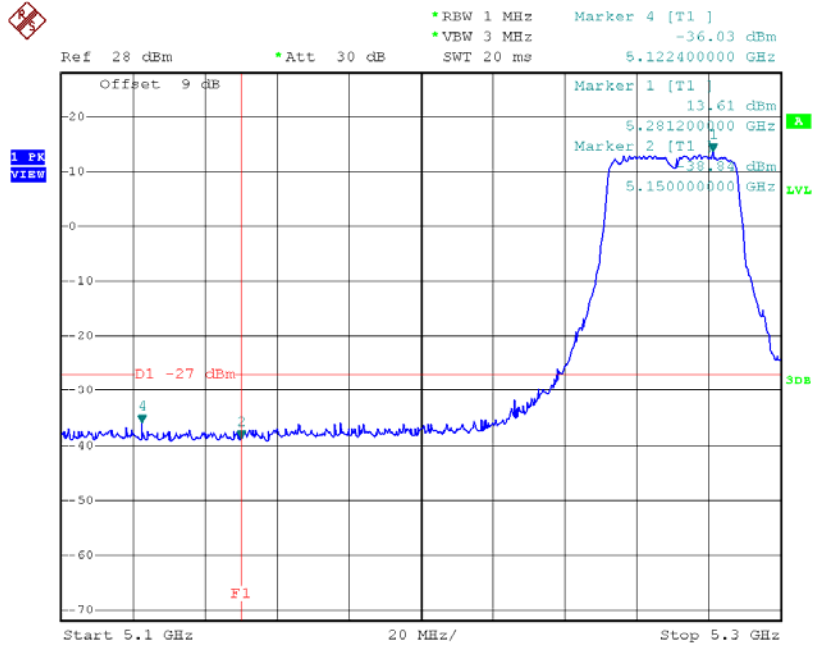

Date: 1.APR.2015 20:54:14


### TX mode CH62

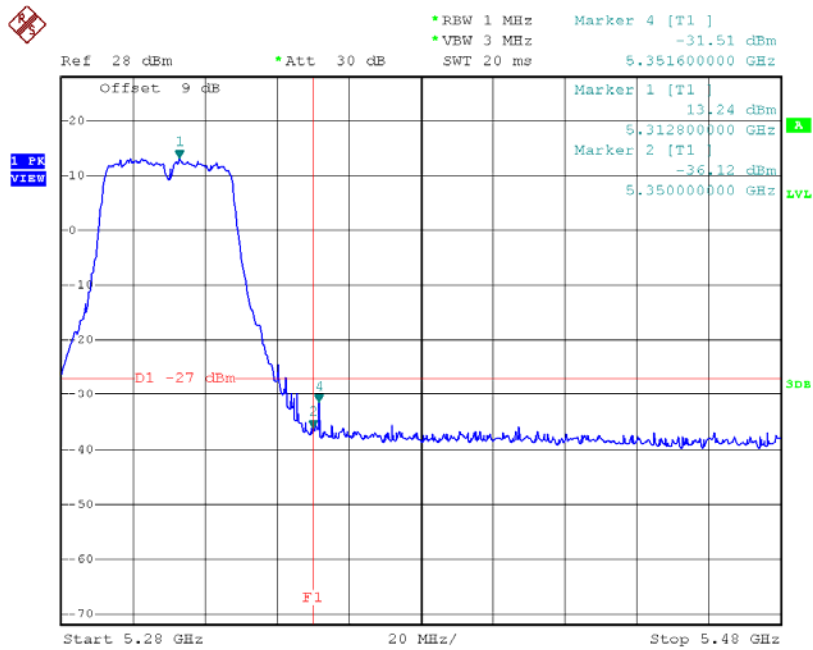

Date: 1.APR.2015 20:54:41


Test Mode: UNII-2A/TX N40 Mode\_ANT 2

### TX mode CH54

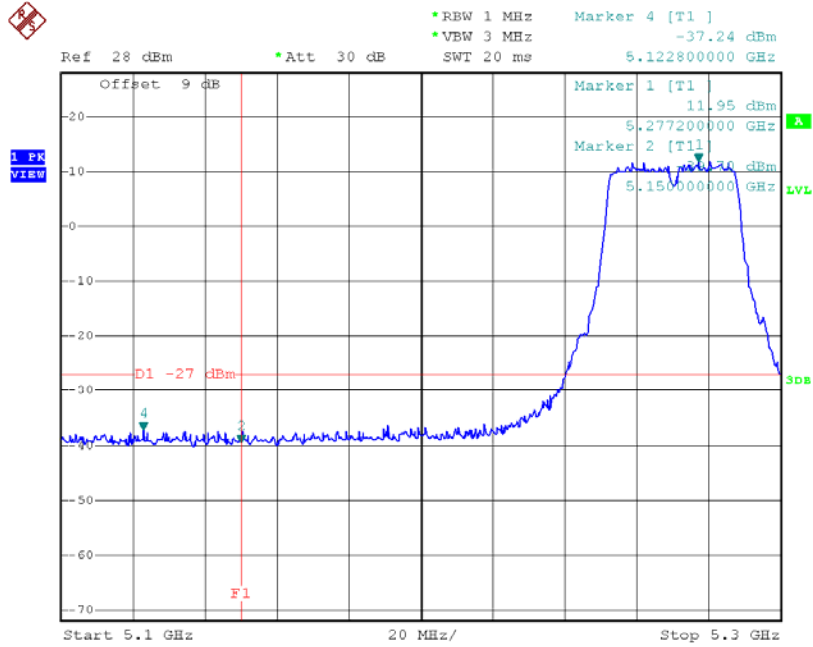

Date: 1.APR.2015 21:49:10


### TX mode CH62

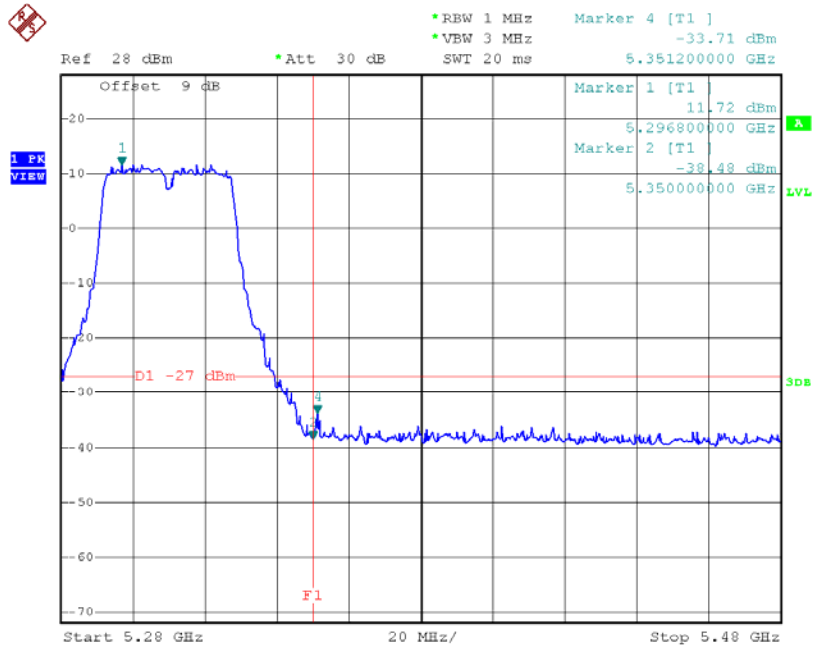

Date: 1.APR.2015 21:49:38


**Test Mode:** UNII-2C/TX A Mode\_ANT 1

**TX mode CH100**

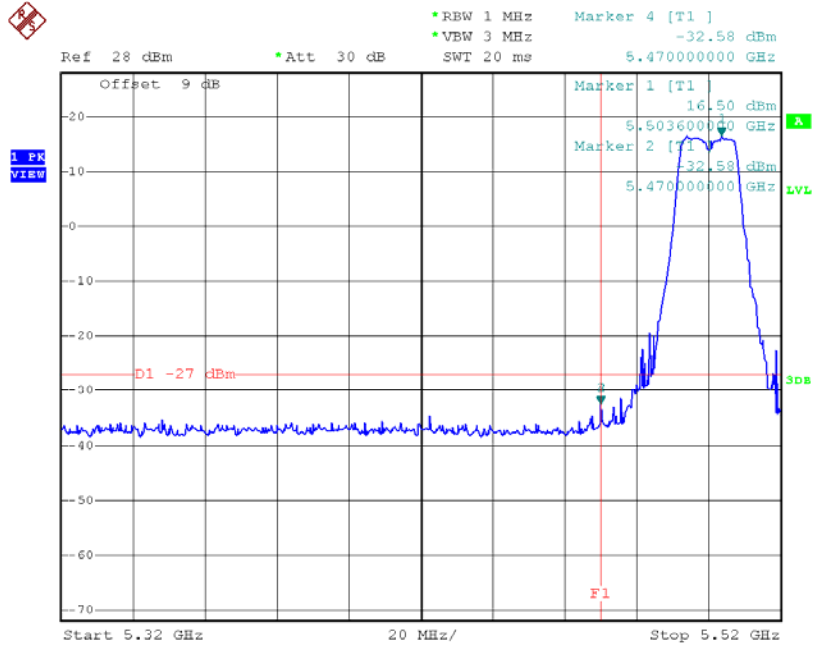

Date: 1.APR.2015 20:37:22


**TX mode CH140**

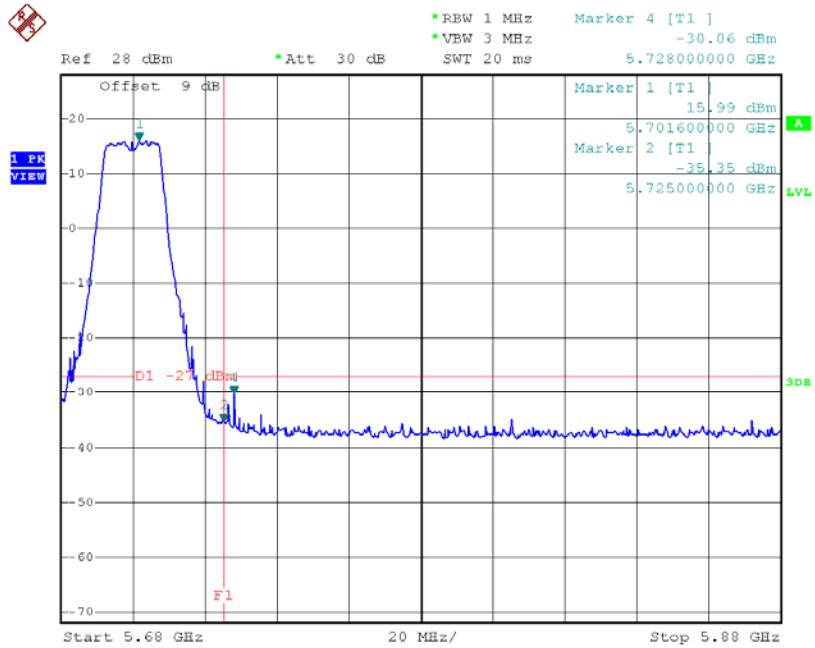

Date: 1.APR.2015 20:38:42


**Test Mode:** UNII-2C/TX A Mode\_ANT 2

**TX mode CH100**

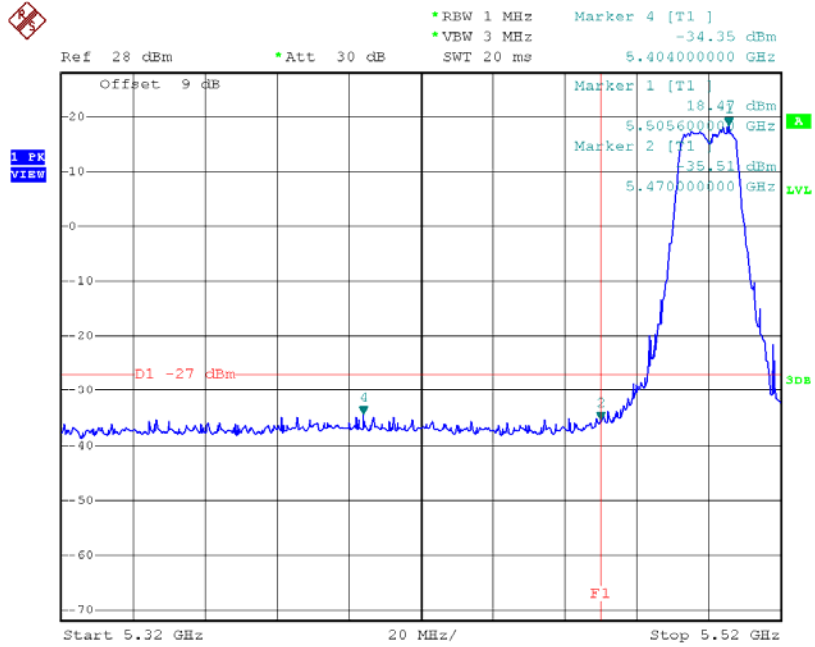

Date: 1.APR.2015 21:33:41


**TX mode CH140**

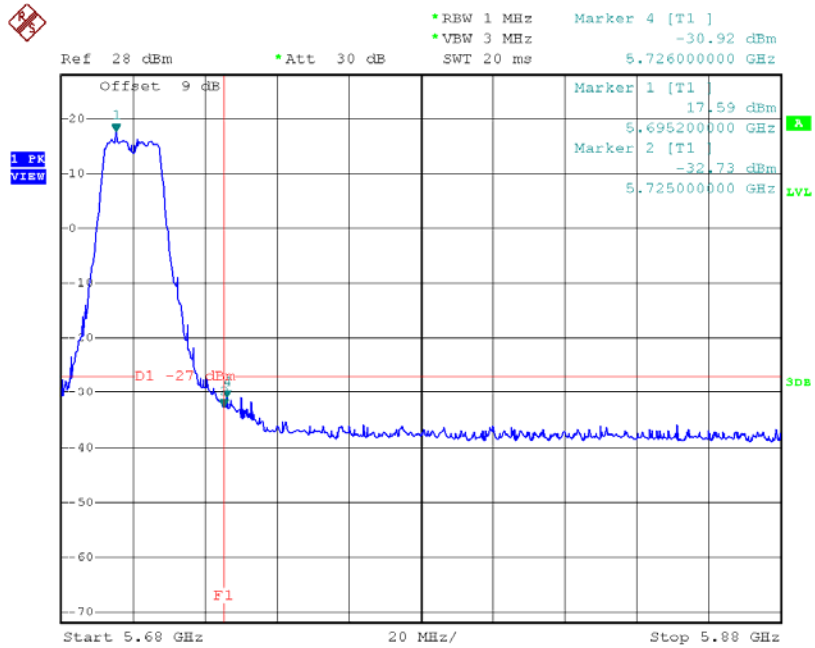

Date: 1.APR.2015 21:35:02


Test Mode: UNII-2C/TX N20 Mode\_ANT 1

### TX mode CH100

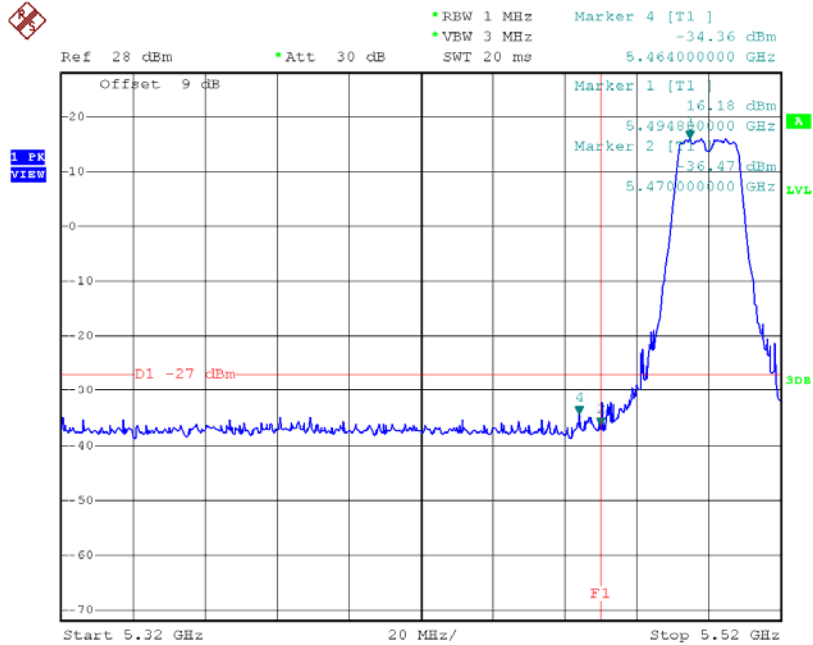

Date: 1.APR.2015 20:44:54


### TX mode CH140

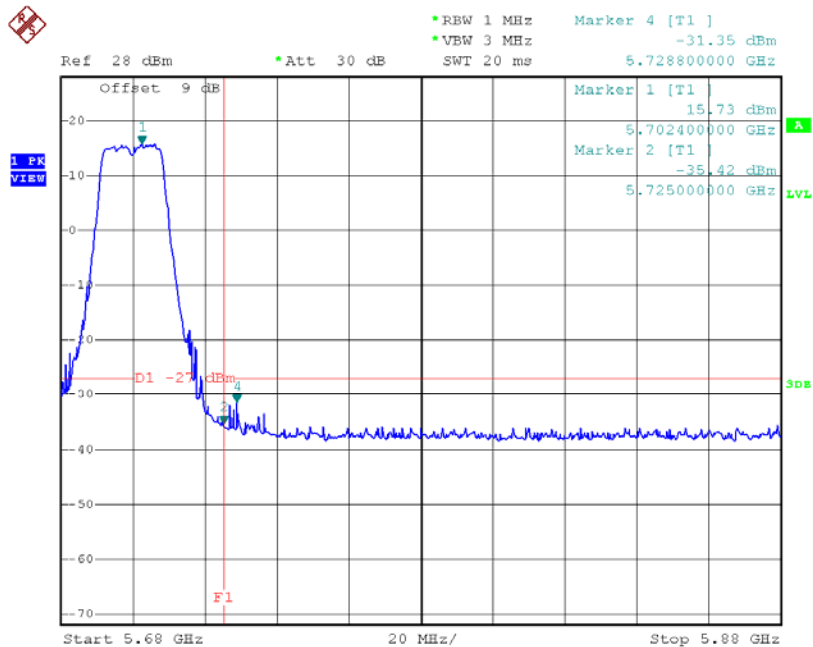

Date: 1.APR.2015 20:45:55


**Test Mode:** UNII-2C/TX N20 Mode\_ANT 2

**TX mode CH100**

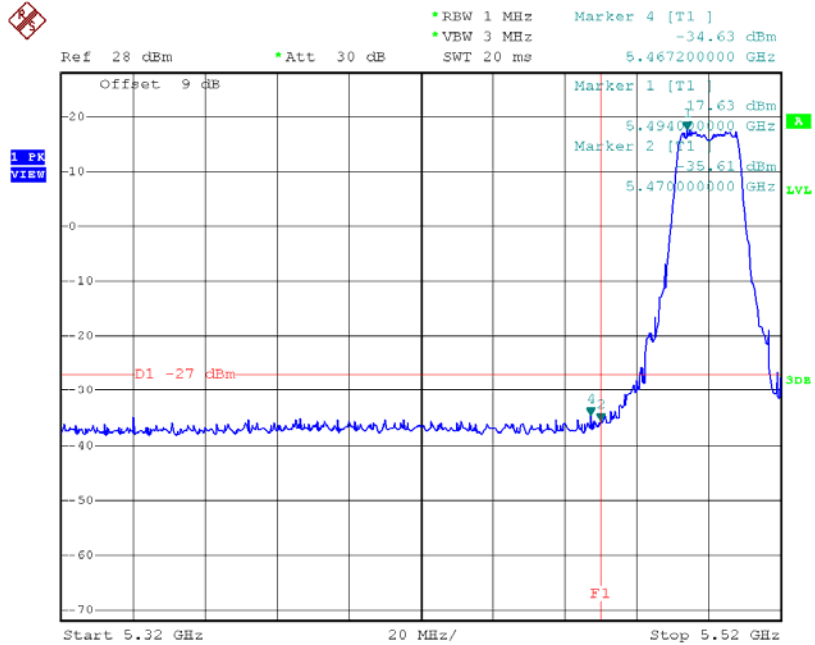

Date: 1.APR.2015 21:40:30


**TX mode CH140**

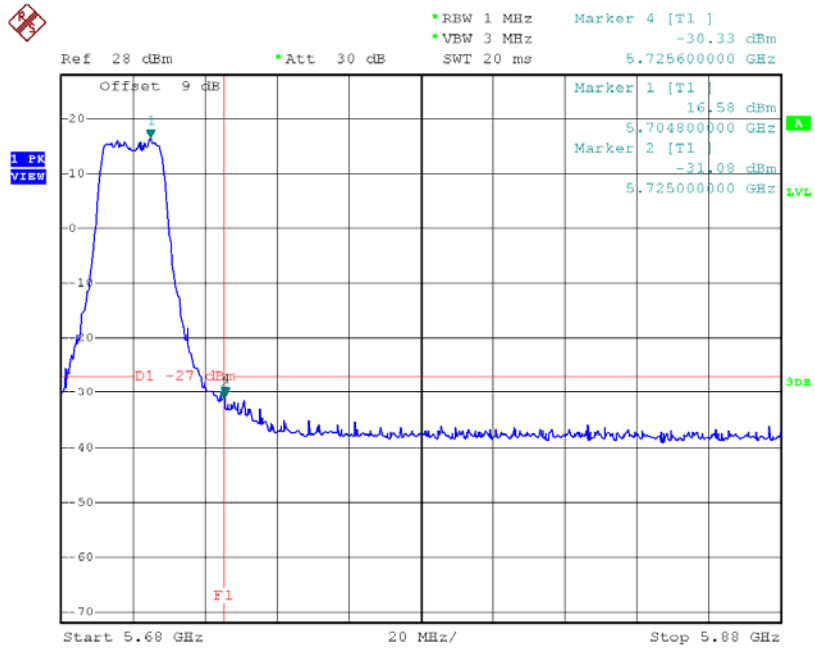

Date: 1.APR.2015 21:41:14


**Test Mode:** UNII-2C/TX N40 Mode\_ANT 1

**TX mode CH102**

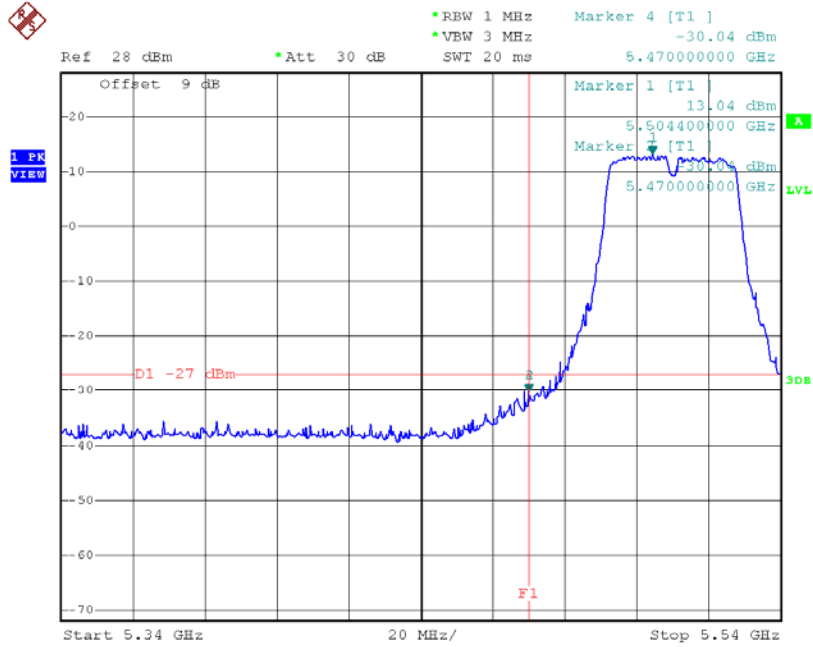

Date: 1.APR.2015 20:55:08


**TX mode CH134**

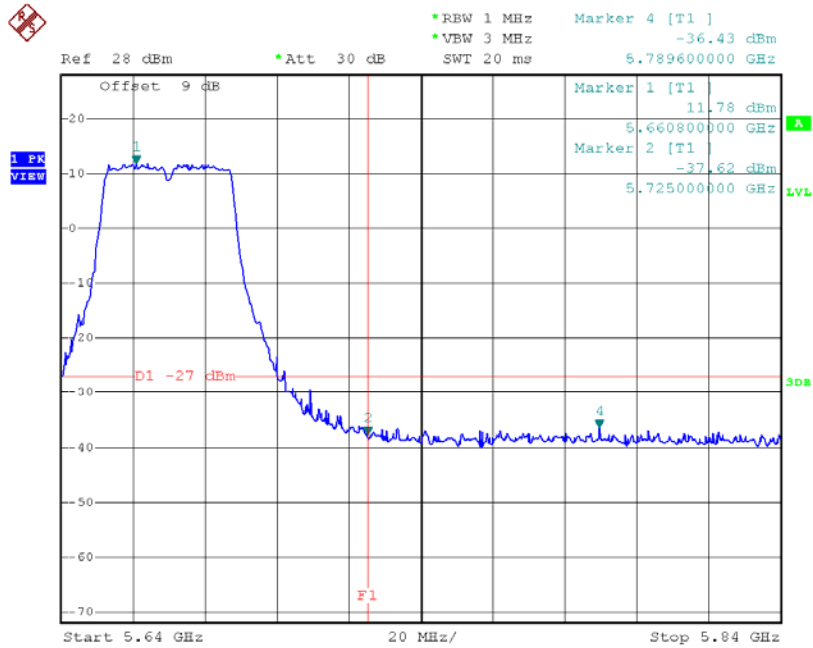

Date: 1.APR.2015 20:55:53


**Test Mode:** UNII-2C/TX N40 Mode\_ANT 2

**TX mode CH102**

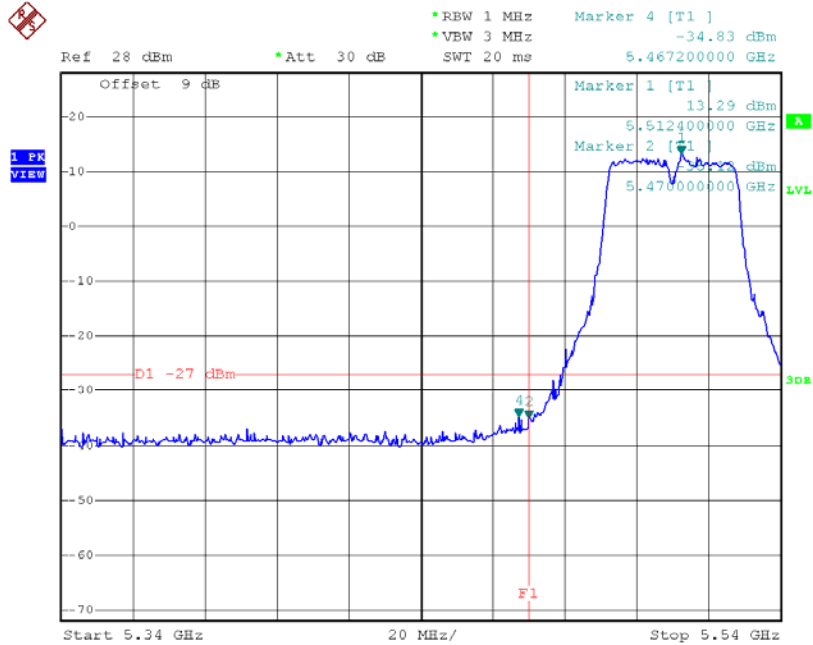

Date: 1.APR.2015 21:50:13

**TX mode CH134**

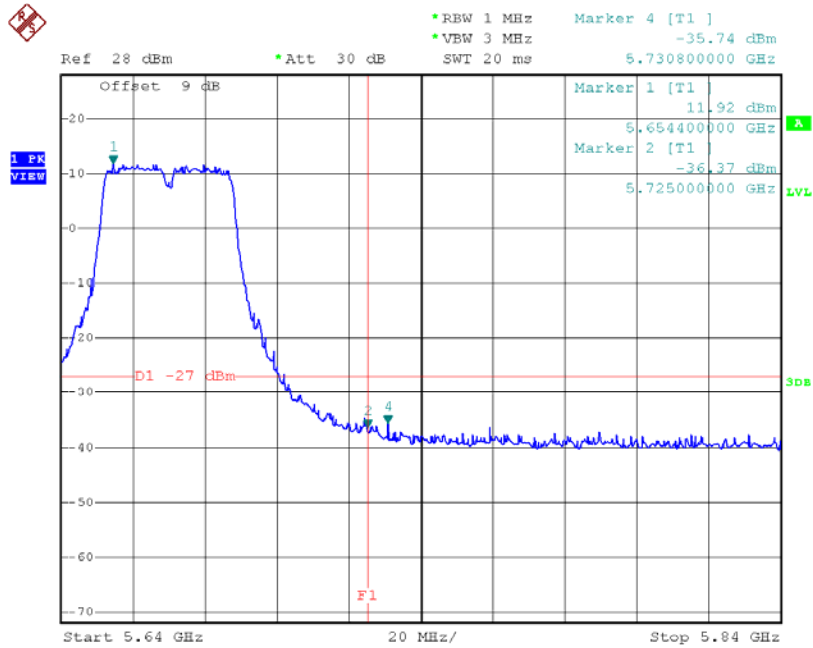


Date: 1.APR.2015 21:51:03






Test Mode: UNII-3/TX N20 Mode\_ANT 1

### TX HT20 mode CH149

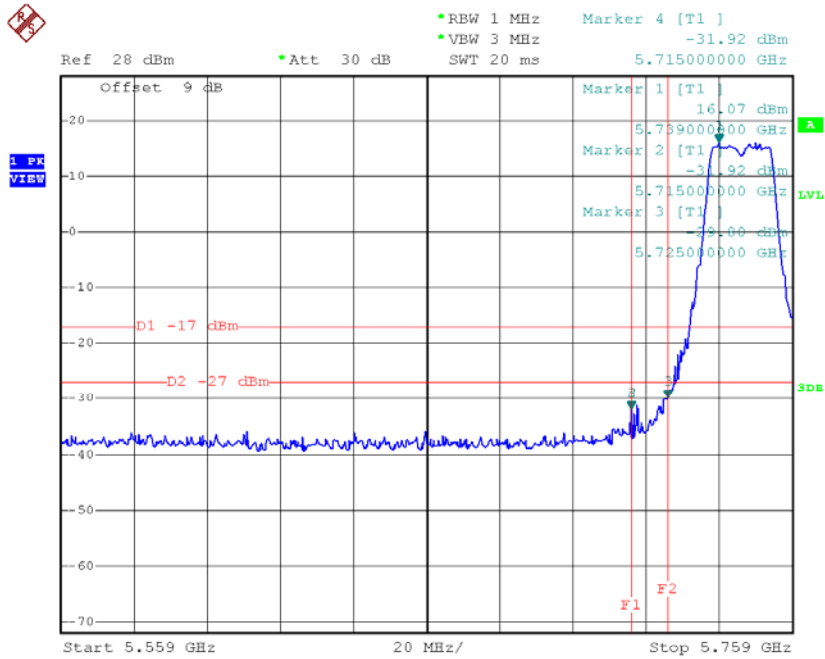

Date: 1.APR.2015 20:46:22


### TX HT20 mode CH165

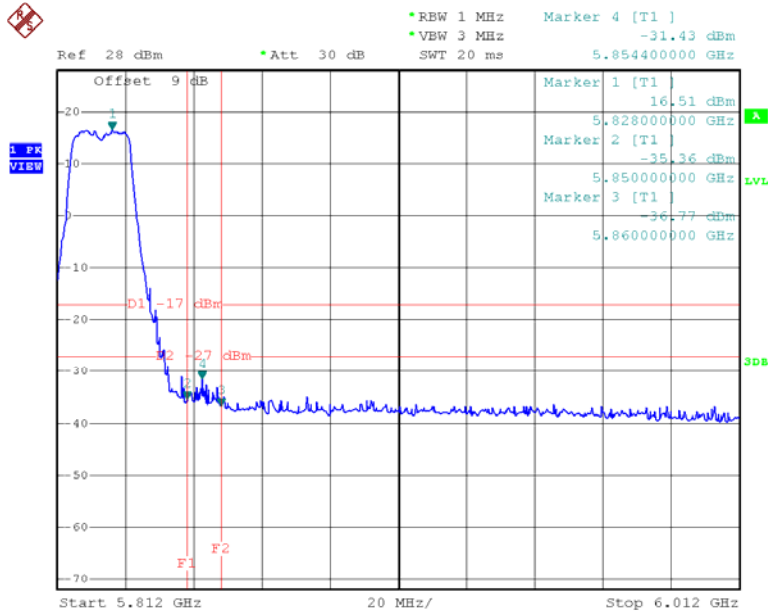

Date: 1.APR.2015 20:47:08


Test Mode: UNII-3/TX N20 Mode\_ANT 2

### TX HT20 mode CH149

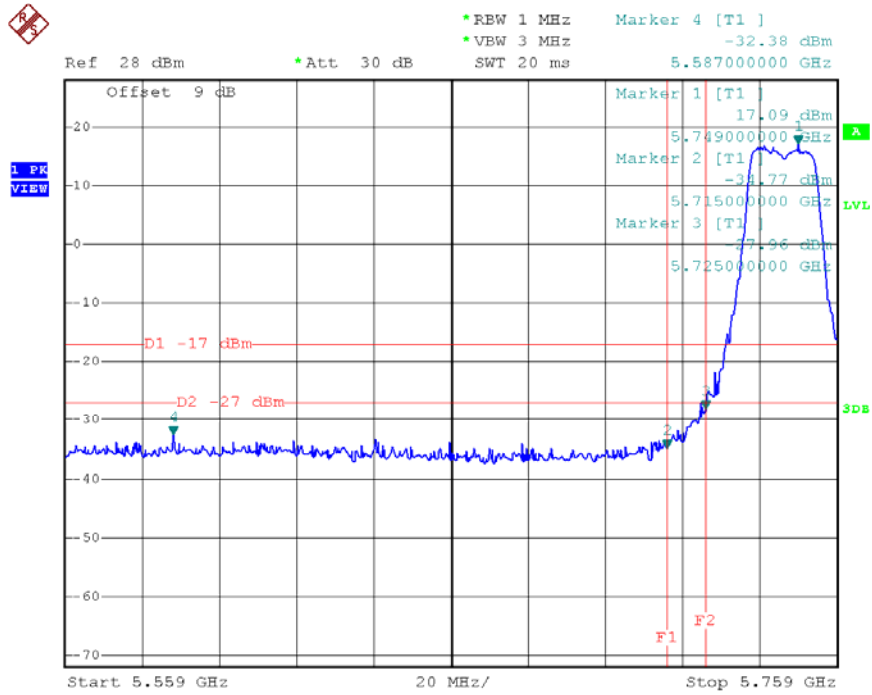

Date: 1.APR.2015 21:41:38


### X HT20 mode CH165

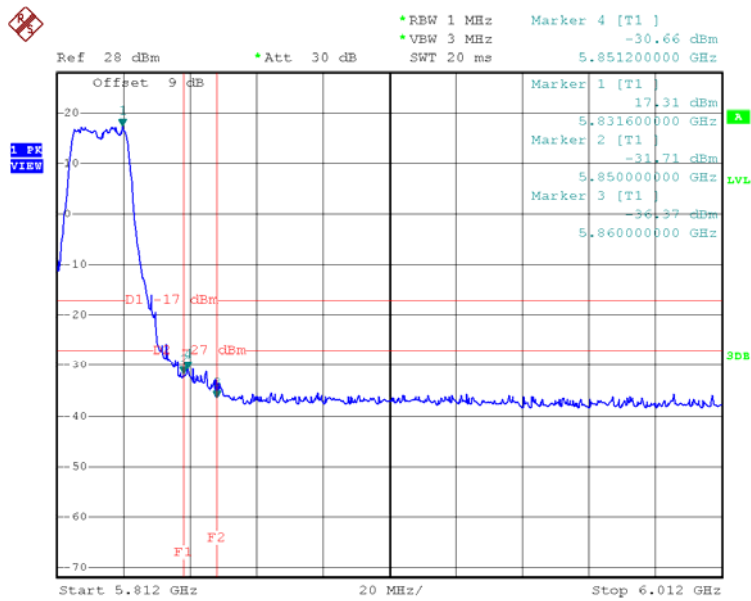

Date: 1.APR.2015 21:42:23


Test Mode: UNII-3/TX N40 Mode\_ANT 1

### UNII-3/TX HT40 mode CH151

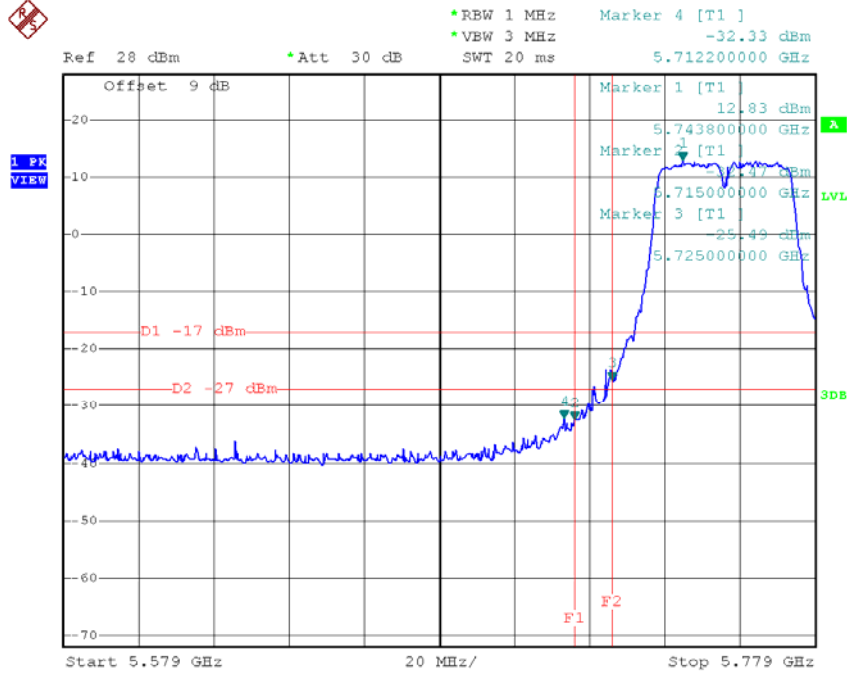

Date: 1.APR.2015 20:56:20


### UNII-3/TX HT40 mode CH159

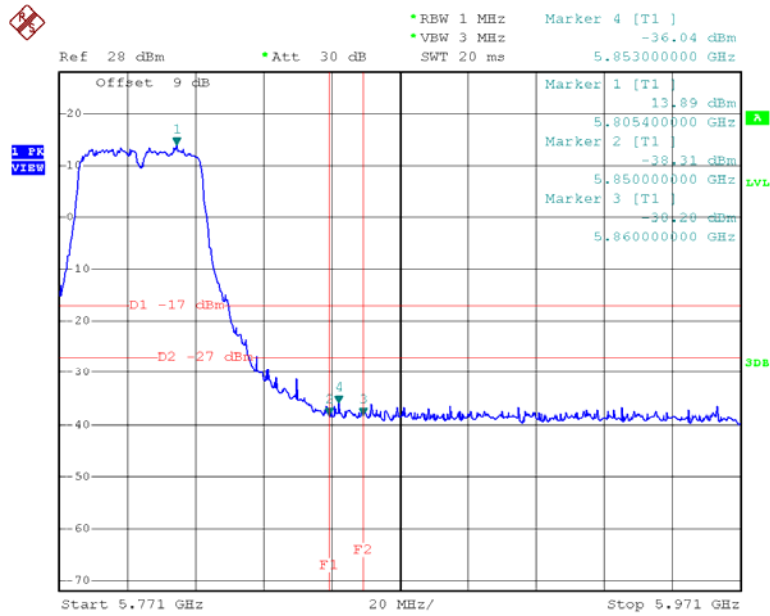

Date: 1.APR.2015 20:56:49


**Test Mode: UNII-3/TX N40 Mode\_ANT 2**

**TX HT40 mode CH151**

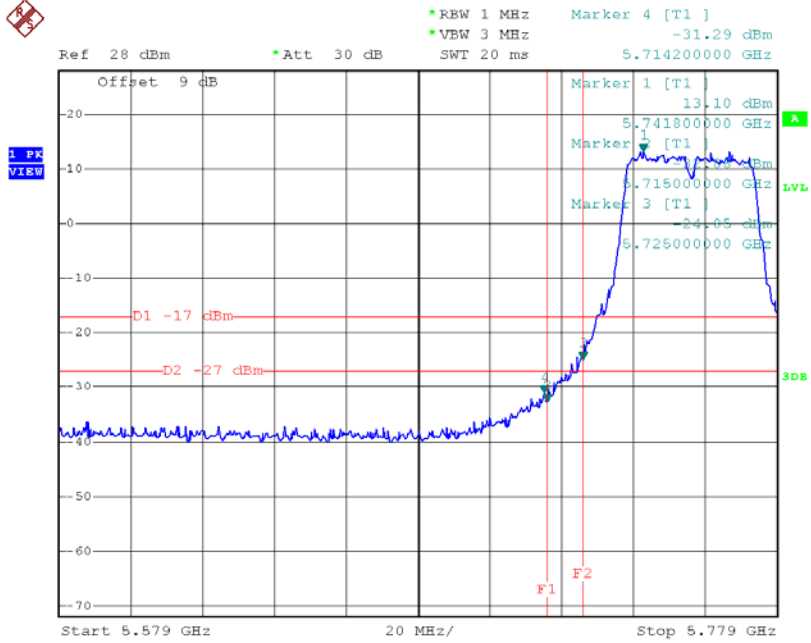

Date: 1.APR.2015 21:51:35


**HT40 mode CH159**

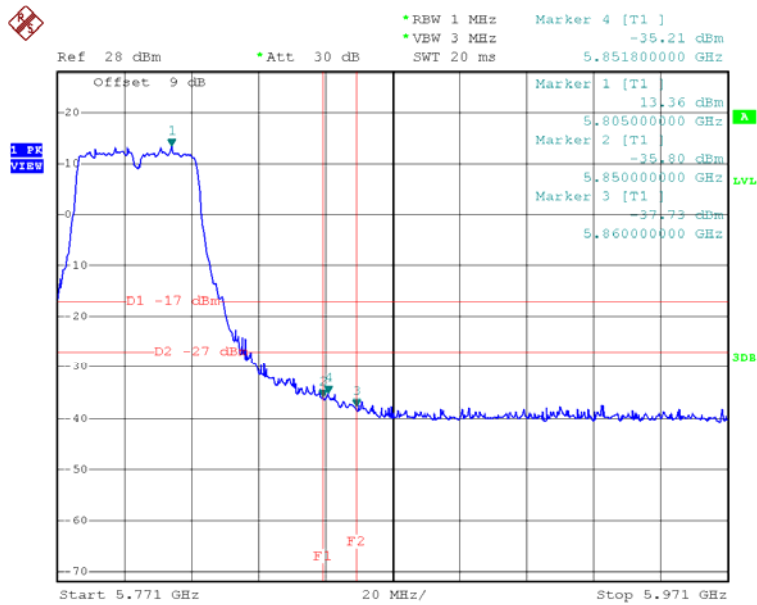

Date: 1.APR.2015 21:52:04


**Test Mode:** UNII-1/TX AC20 Mode\_ANT 1

### TX mode CH36

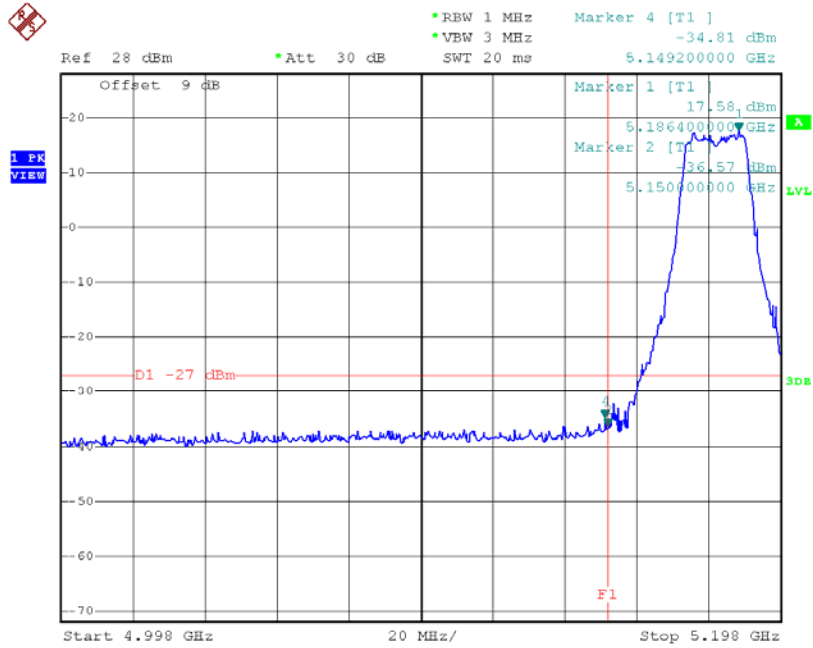

Date: 1.APR.2015 20:47:45


### TX mode CH48

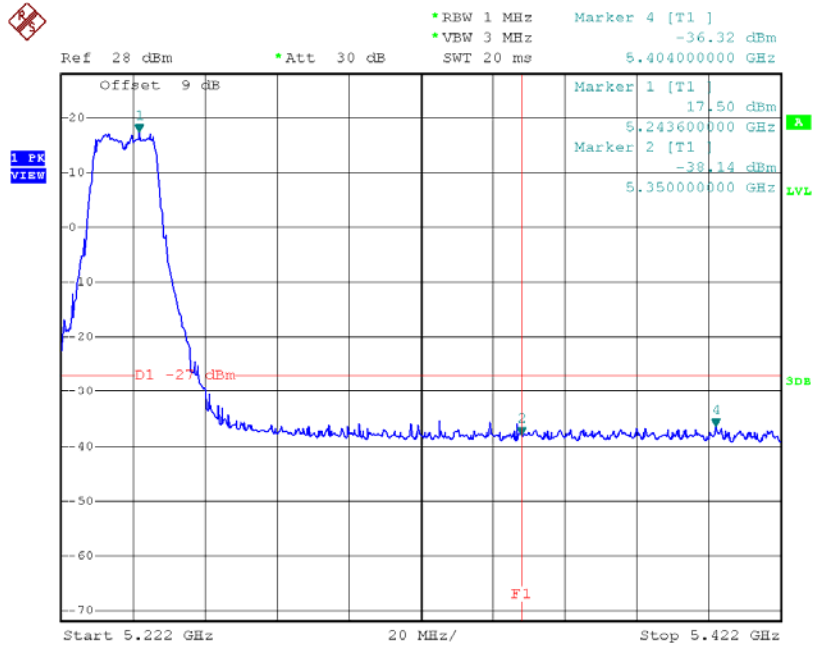

Date: 1.APR.2015 20:48:58


**Test Mode:** UNII-1/TX AC20 Mode\_ANT 2

**TX mode CH36**

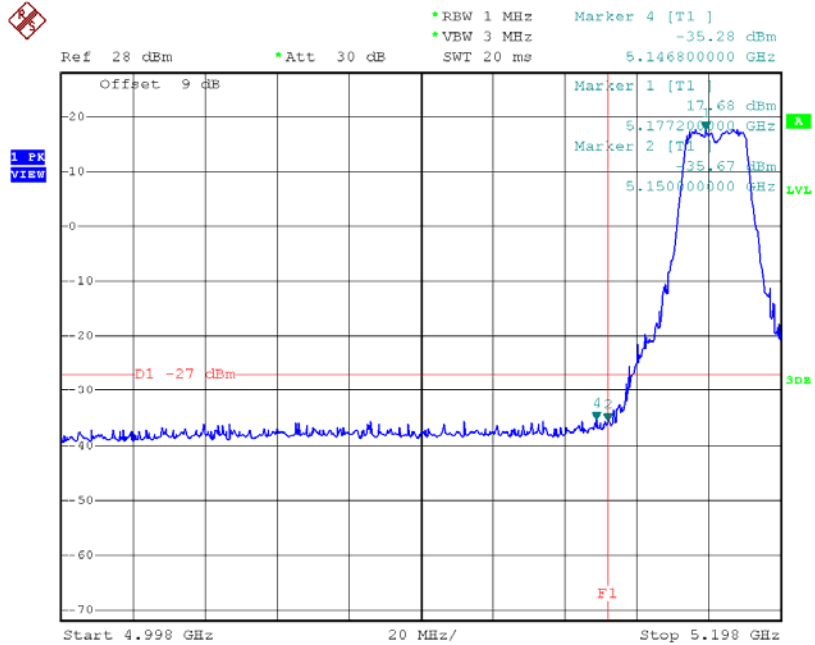

Date: 1.APR.2015 21:42:57


**TX mode CH48**

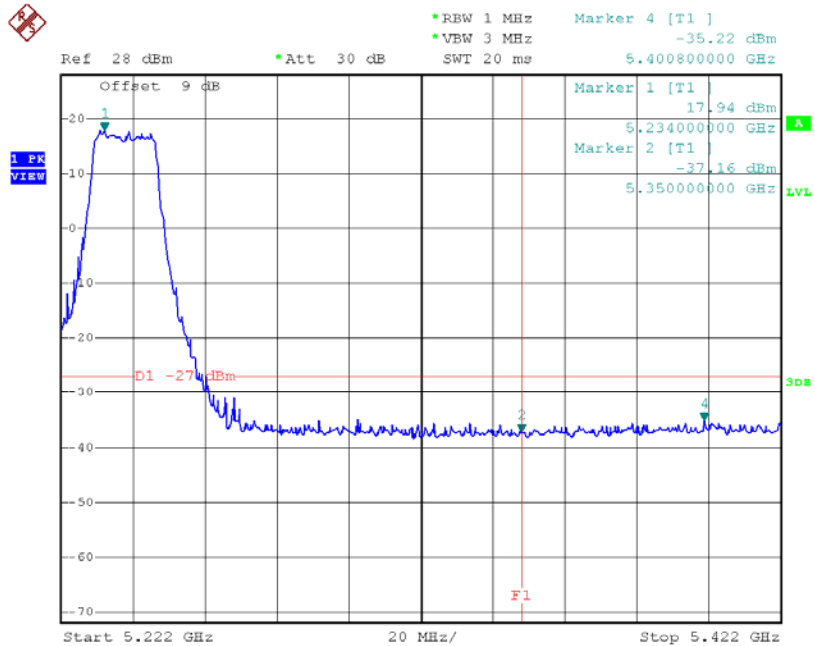

Date: 1.APR.2015 21:43:44


**Test Mode:** UNII-1/TX AC40 Mode\_ANT 1

**TX mode CH38**

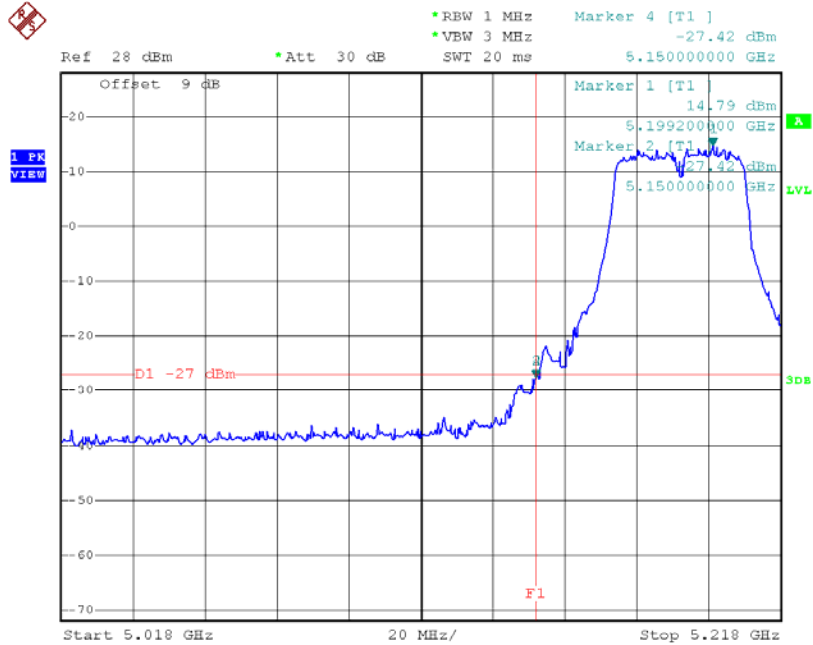

Date: 1.APR.2015 20:57:20


**TX mode CH46**

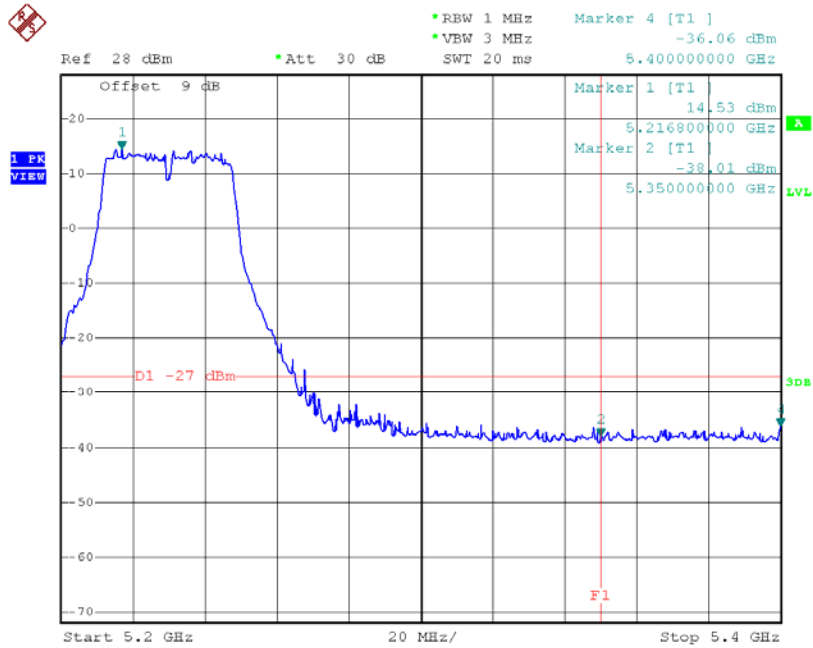

Date: 1.APR.2015 20:57:53


**Test Mode:** UNII-1/TX AC40 Mode\_ANT 2

**TX mode CH38**

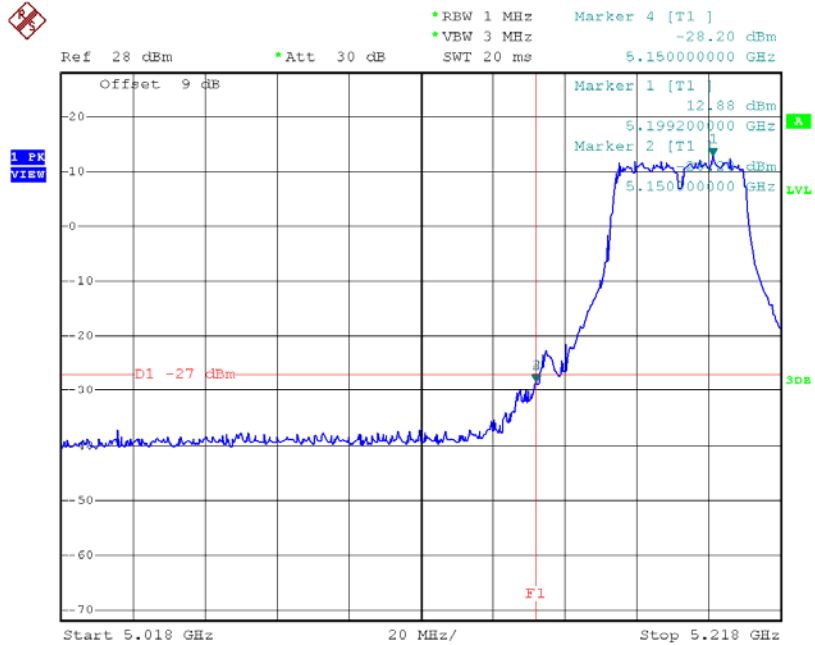

Date: 1.APR.2015 21:52:39


**TX mode CH46**

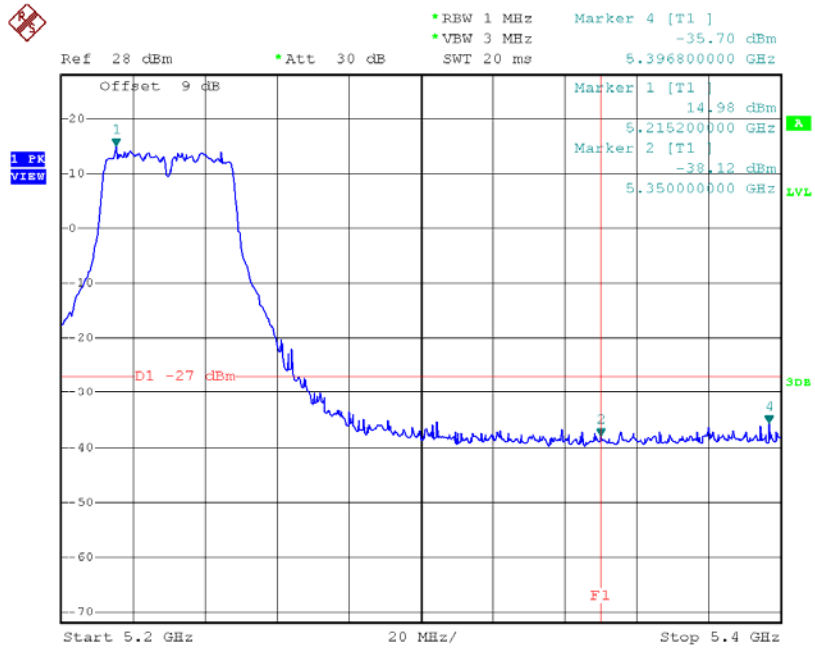


Date: 1.APR.2015 21:53:13

Test Mode: UNII-1/TX AC80 Mode\_ANT 1

TX mode CH42

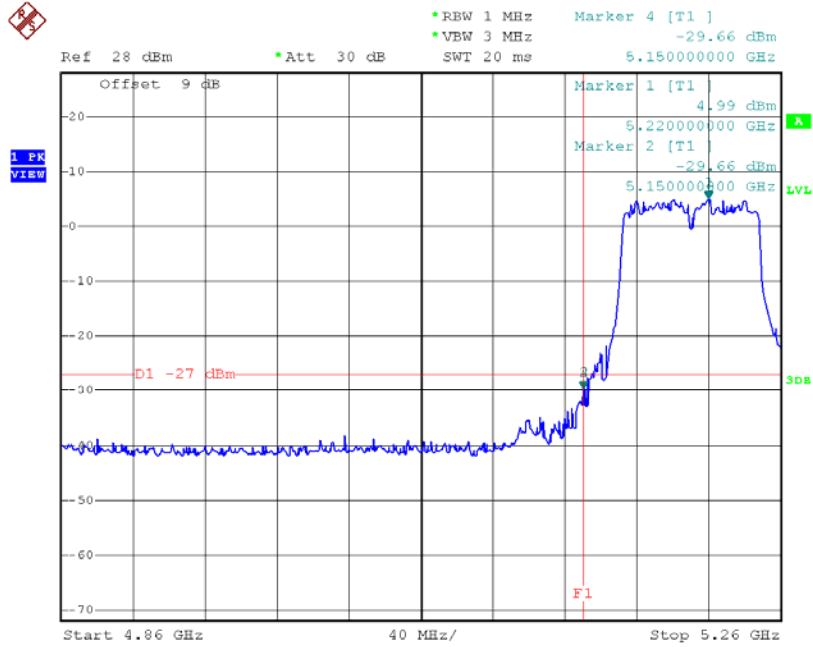


Date: 1.APR.2015 21:15:24

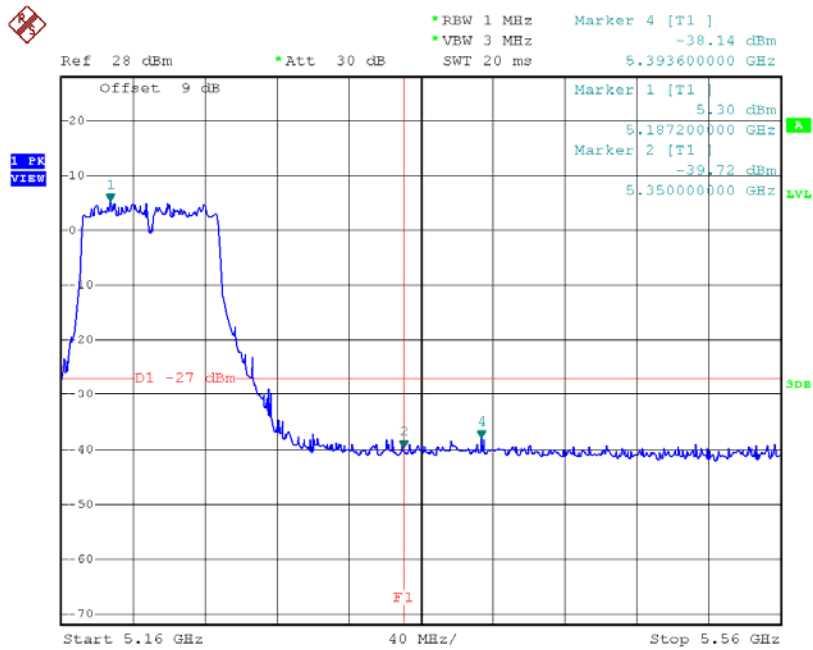


Date: 1.APR.2015 21:15:31

Test Mode: UNII-1/TX AC80 Mode\_ANT 2

TX mode CH42

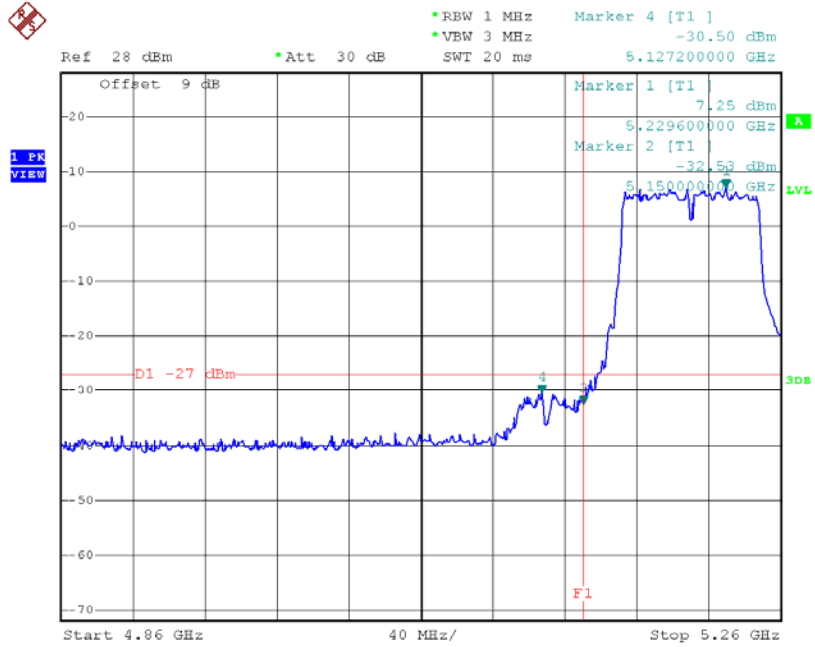


Date: 1.APR.2015 21:58:16

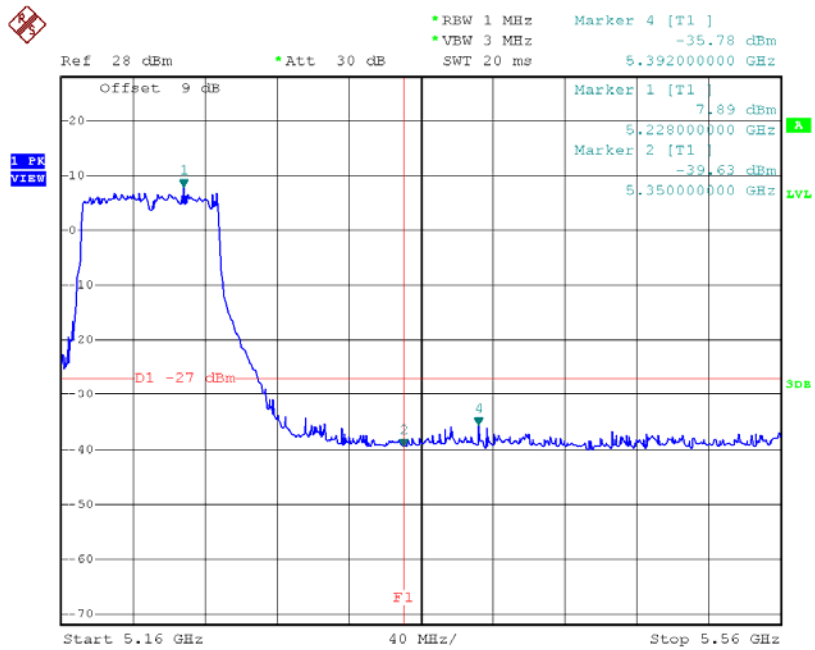

Date: 1.APR.2015 21:58:24


**Test Mode:** UNII-2A/TX AC20 Mode\_ANT 1

### TX mode CH52

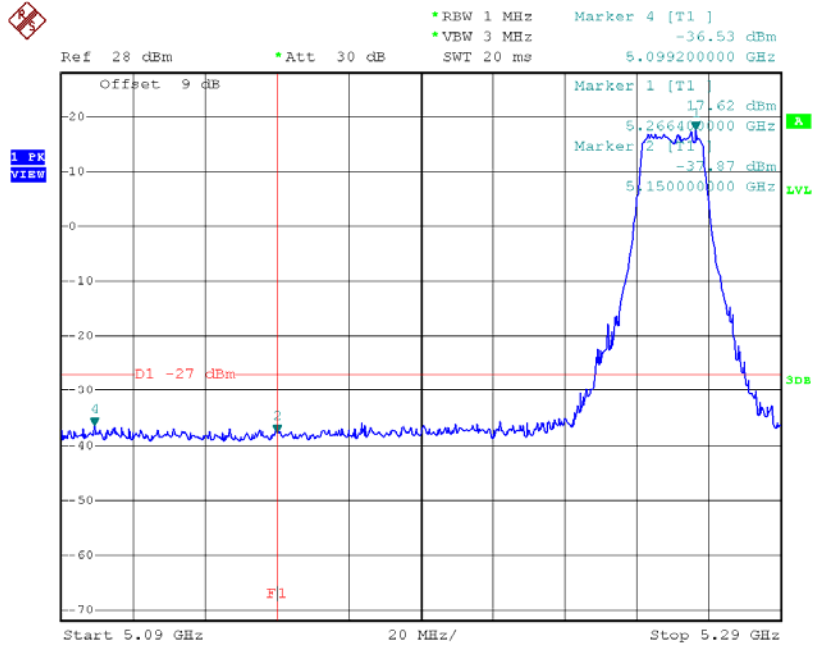

Date: 1.APR.2015 20:49:24


### TX mode CH64

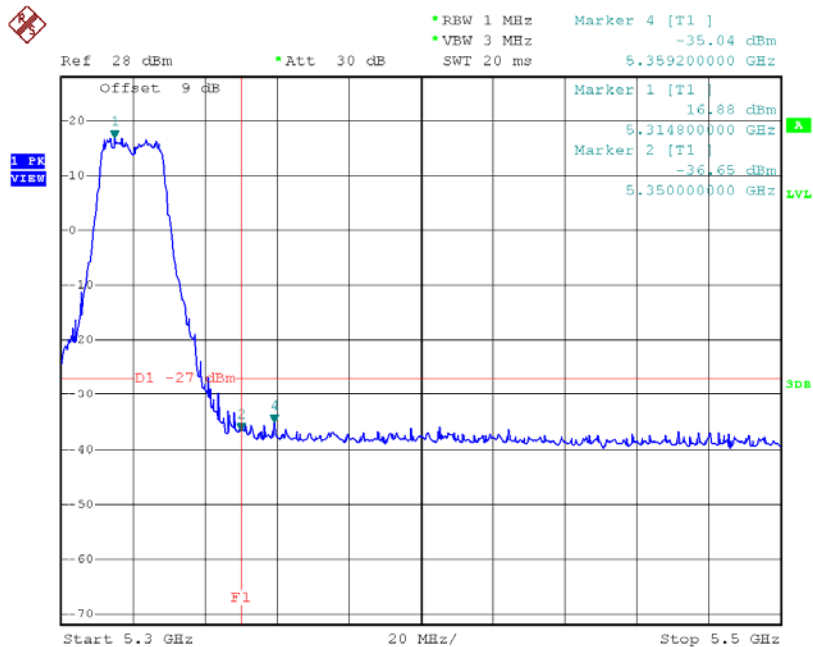

Date: 1.APR.2015 20:50:14


**Test Mode:** UNII-2A/TX AC20 Mode\_ANT 2

### TX mode CH52

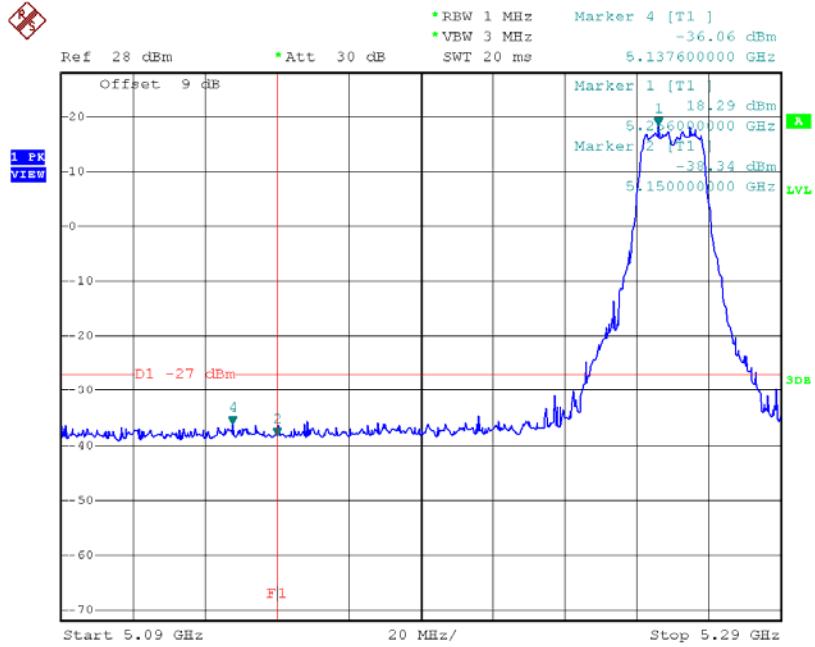

Date: 1.APR.2015 21:44:09


### TX mode CH64

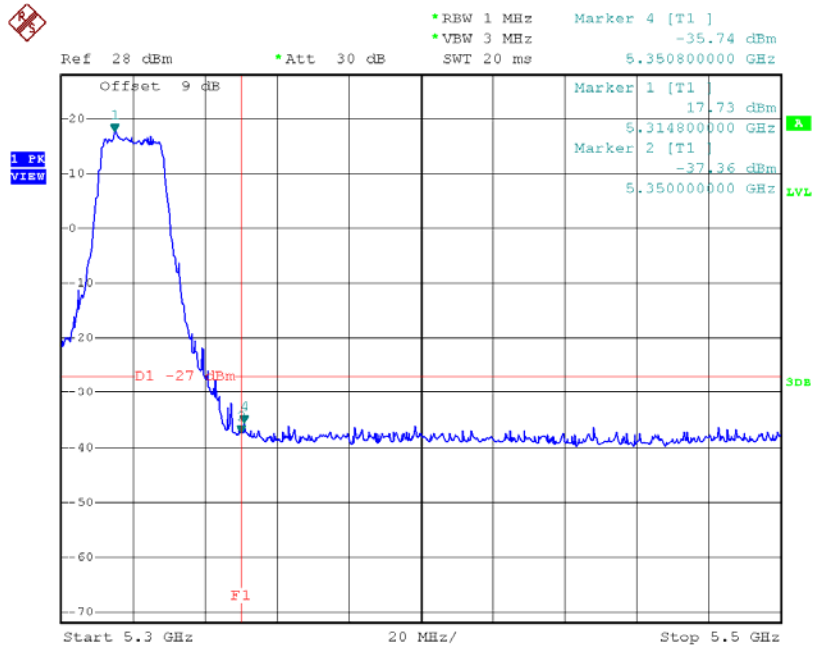

Date: 1.APR.2015 21:45:02


**Test Mode:** UNII-2A/TX AC40 Mode\_ANT 1

**TX mode CH54**

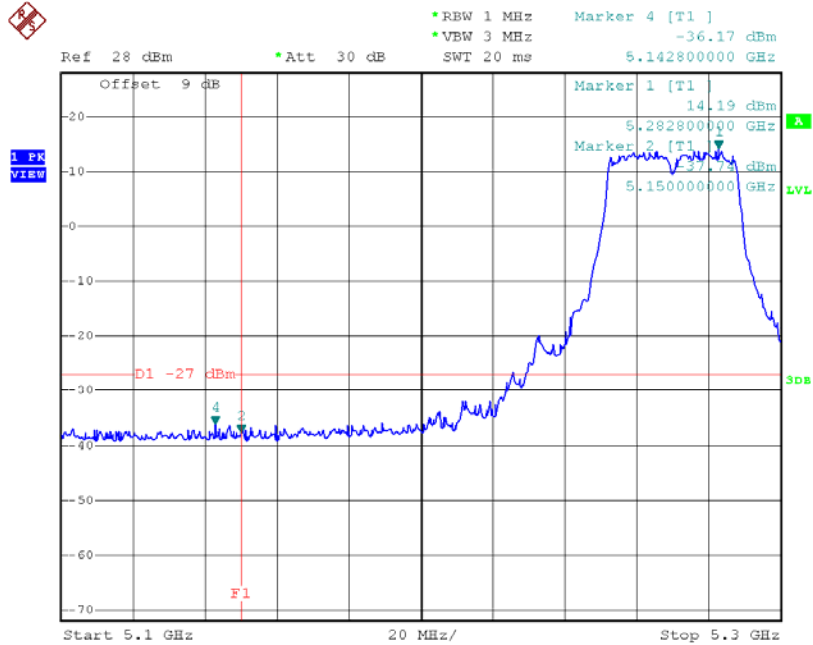

Date: 1.APR.2015 20:58:21

**TX mode CH62**

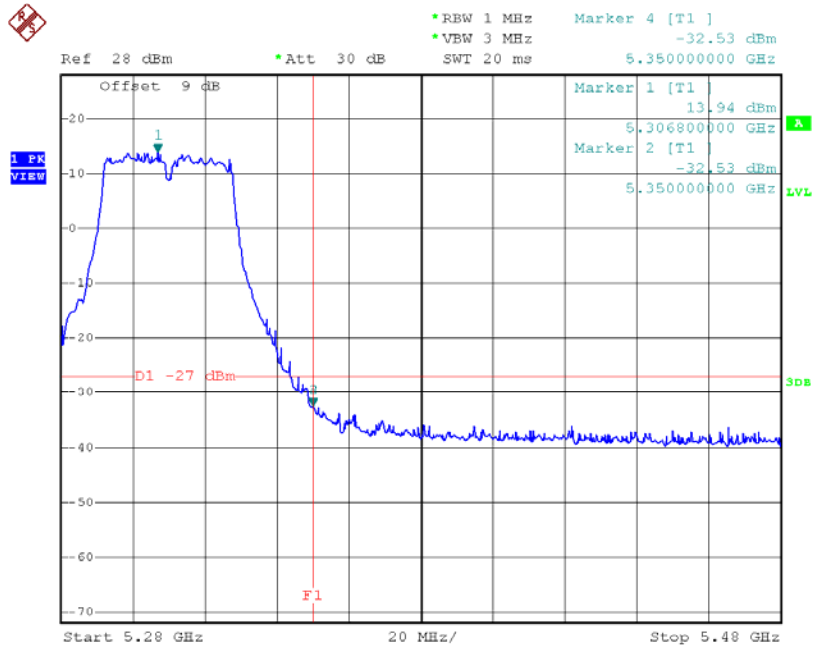


Date: 1.APR.2015 20:59:09




**Test Mode:** UNII-2A/TX AC80 Mode\_ANT 1

**TX mode CH58**

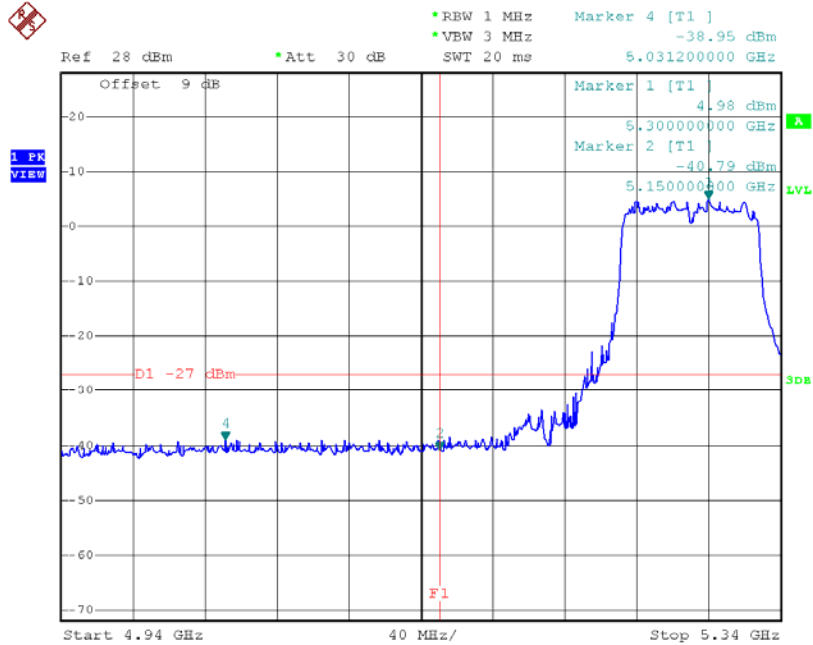


Date: 1.APR.2015 21:16:20

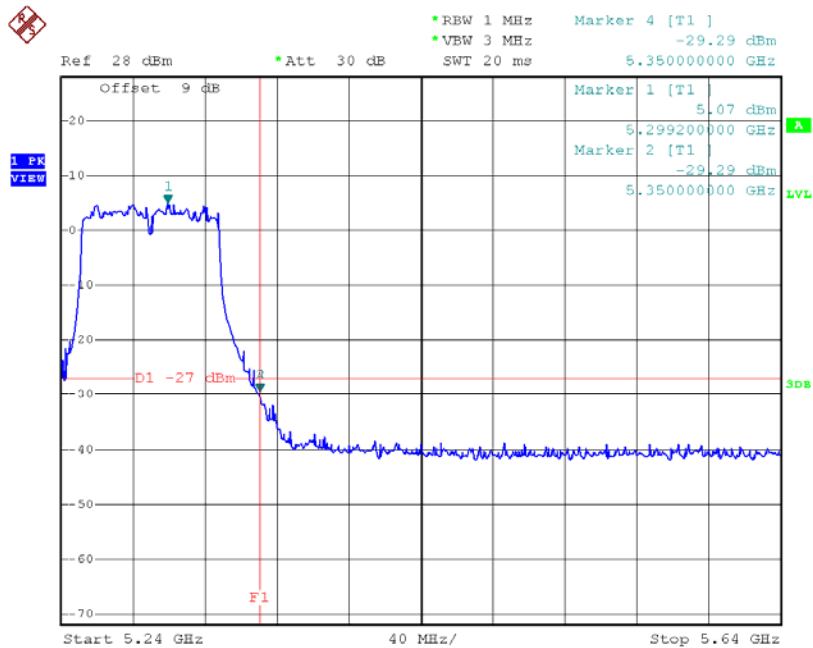


Date: 1.APR.2015 21:16:27

**Test Mode:** UNII-2A/TX AC80 Mode\_ANT 2

**TX mode CH58**

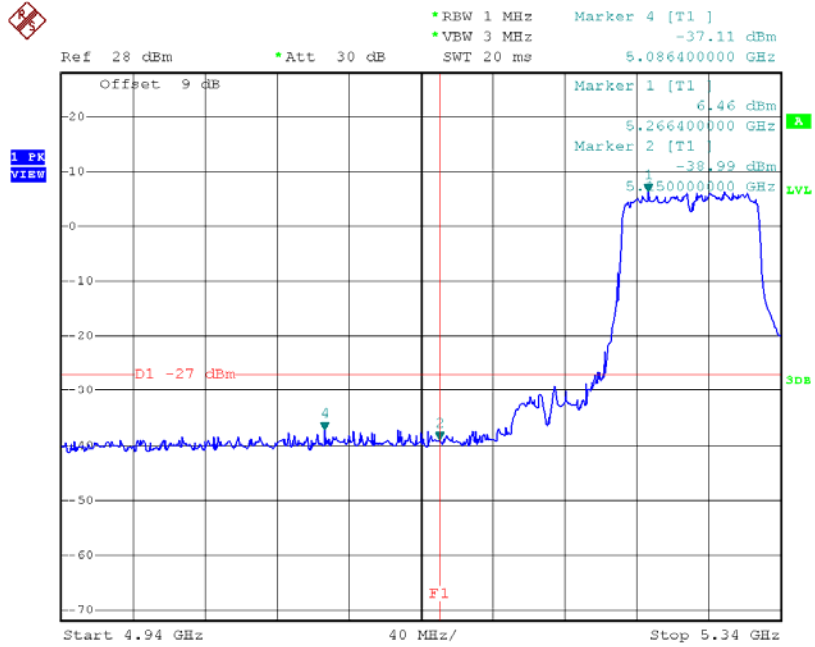


Date: 1.APR.2015 21:59:01

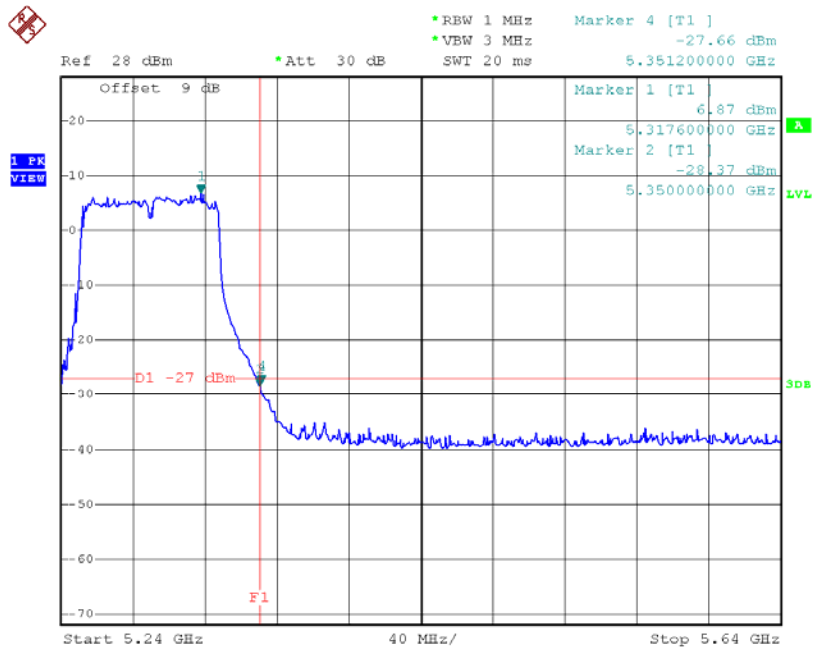

Date: 1.APR.2015 21:59:09


Test Mode: UNII-2C/TX AC20 Mode\_ANT 1

### TX mode CH100

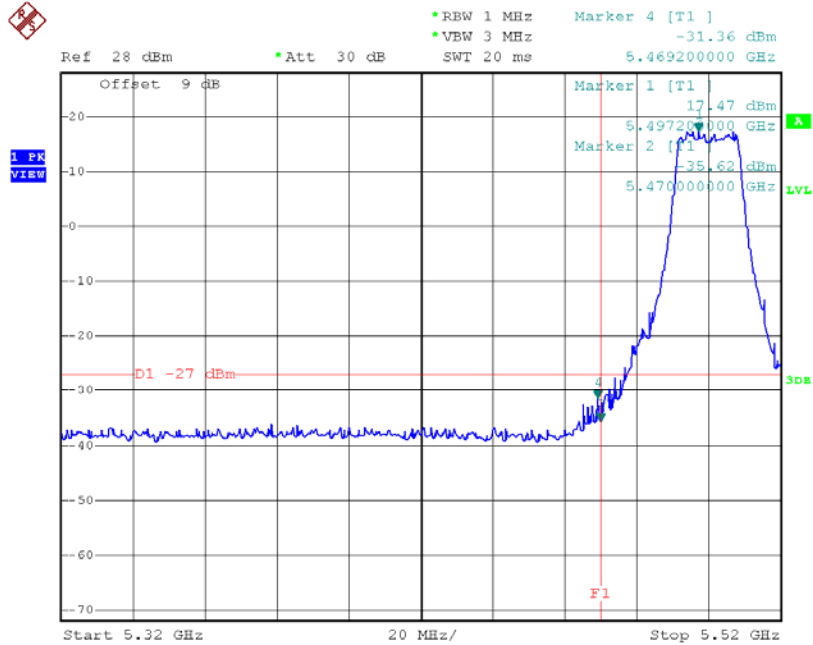

Date: 1.APR.2015 20:50:39


### TX mode CH140

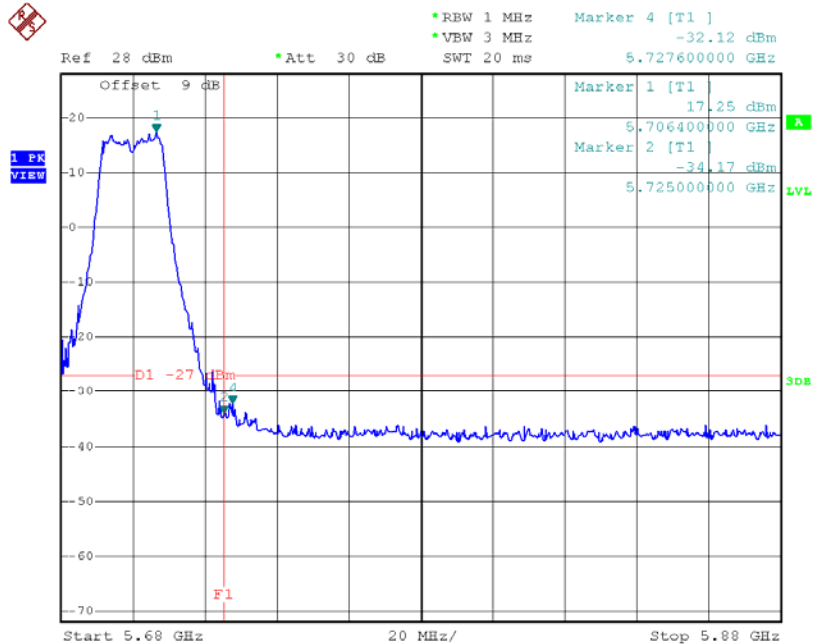

Date: 1.APR.2015 20:51:25


**Test Mode:** UNII-2C/TX AC20 Mode\_ANT 2

**TX mode CH100**

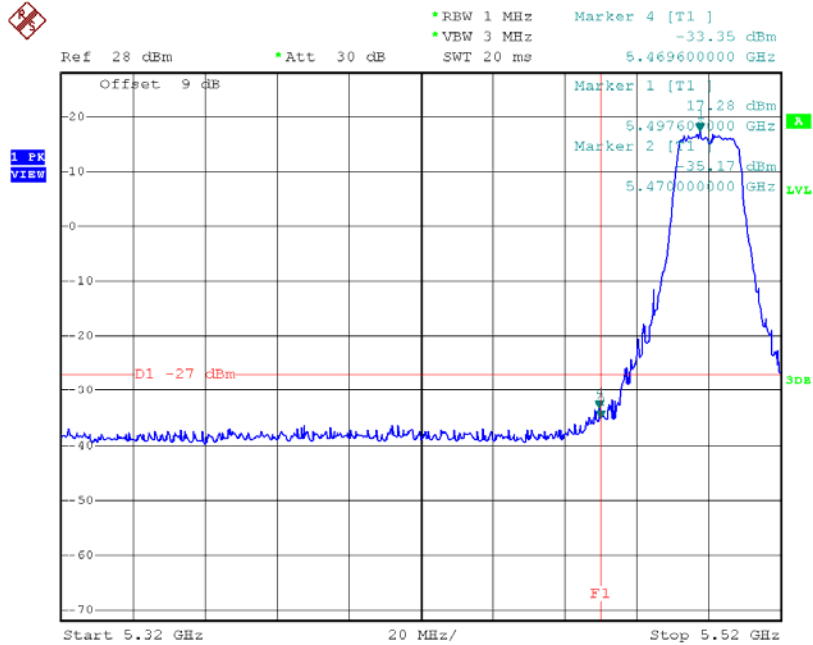

Date: 1.APR.2015 21:45:25


**TX mode CH140**

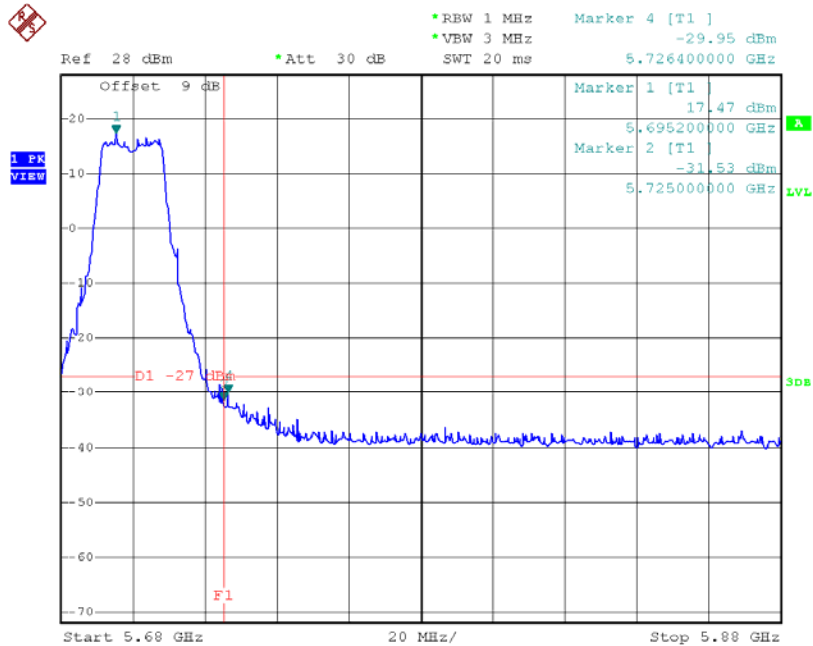

Date: 1.APR.2015 21:46:07


**Test Mode:** UNII-2C/TX AC40 Mode\_ANT 1

**TX mode CH102**

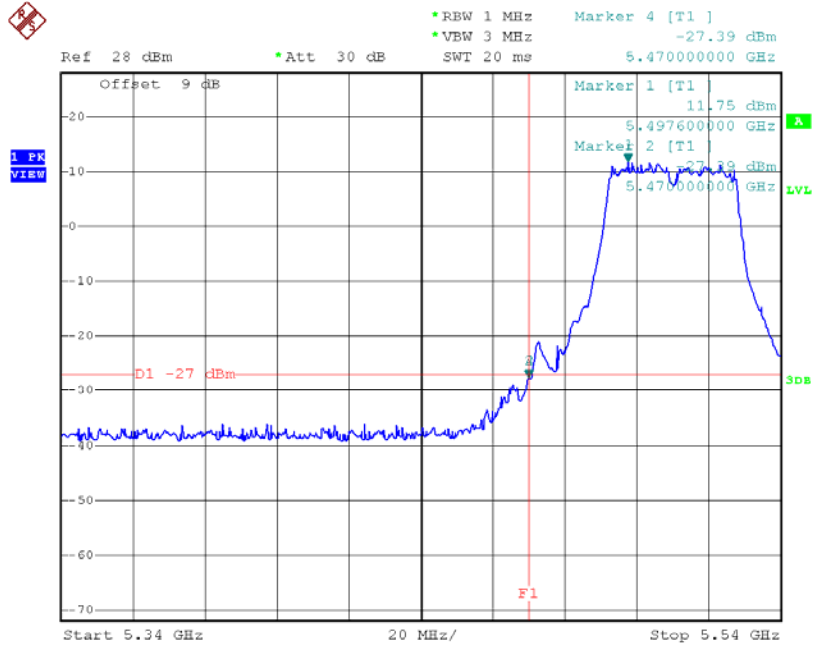

Date: 1.APR.2015 21:01:59


**TX mode CH134**

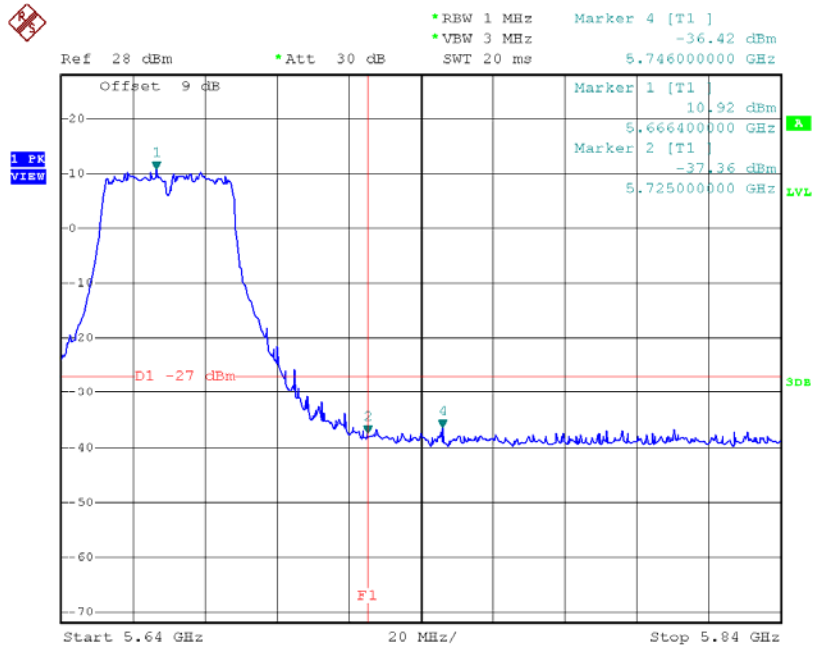

Date: 1.APR.2015 21:03:21


**Test Mode:** UNII-2C/TX AC40 Mode\_ANT 2

**TX mode CH102**

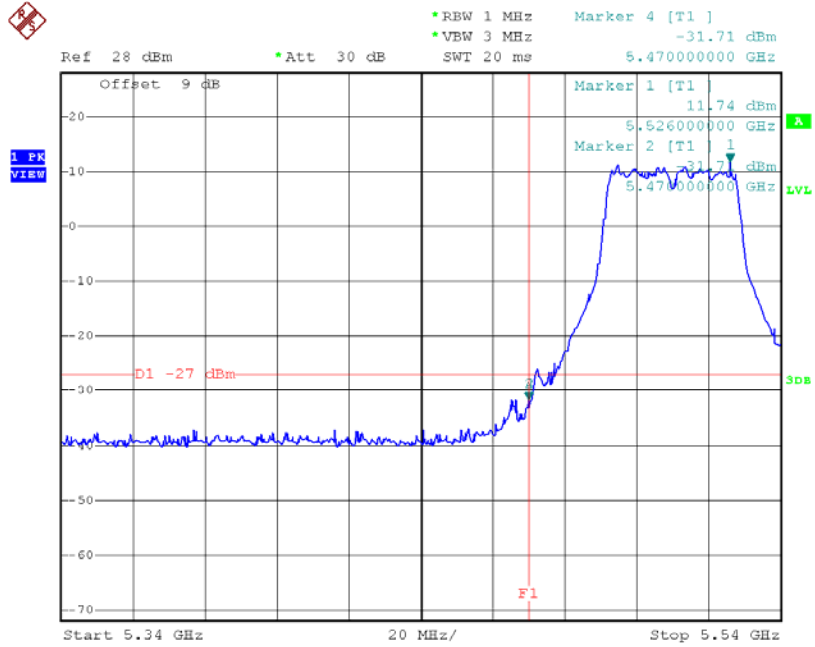

Date: 1.APR.2015 21:55:23


**TX mode CH134**

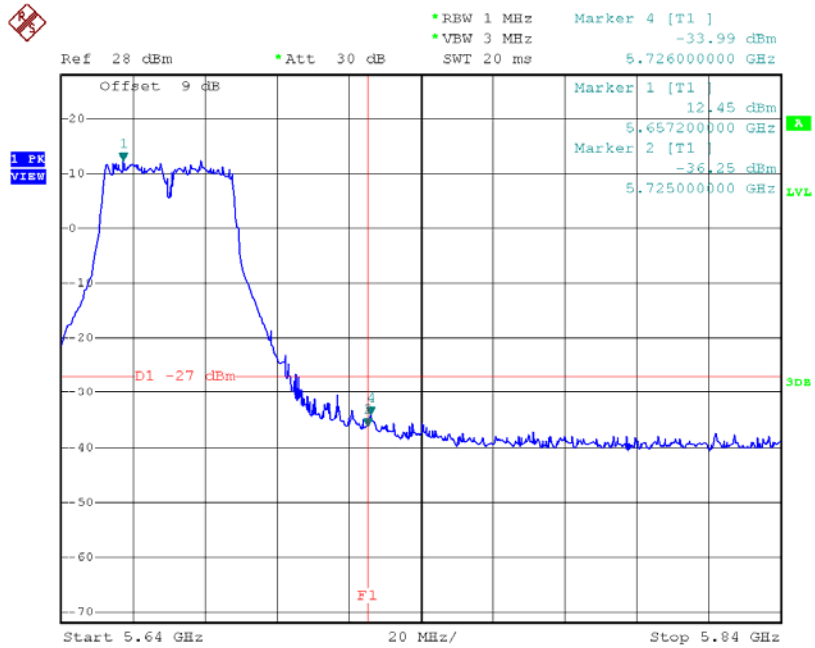

Date: 1.APR.2015 21:56:14


**Test Mode:** UNII-2C/TX AC80 Mode\_ANT 1

**TX mode CH106**

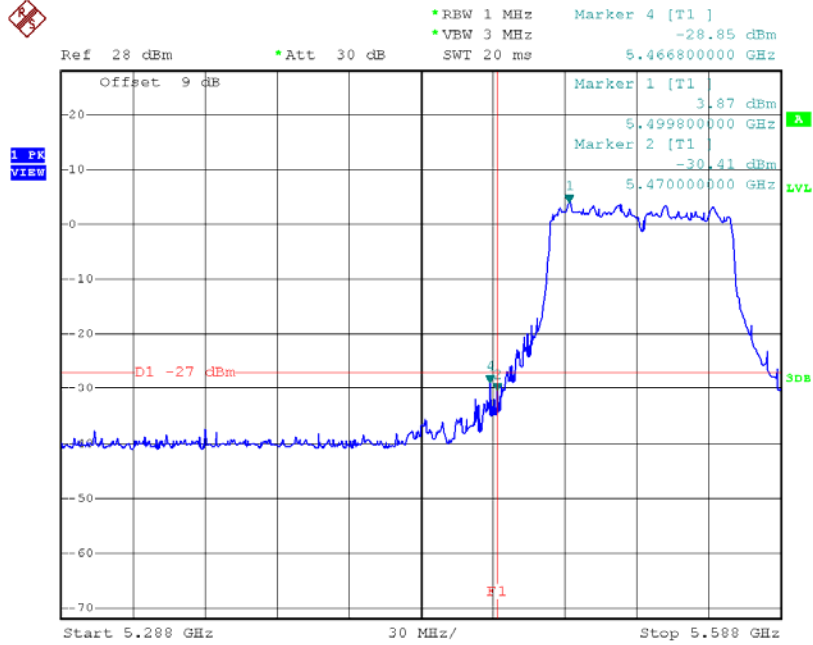

Date: 1.APR.2015 21:17:54


**TX mode CH122**

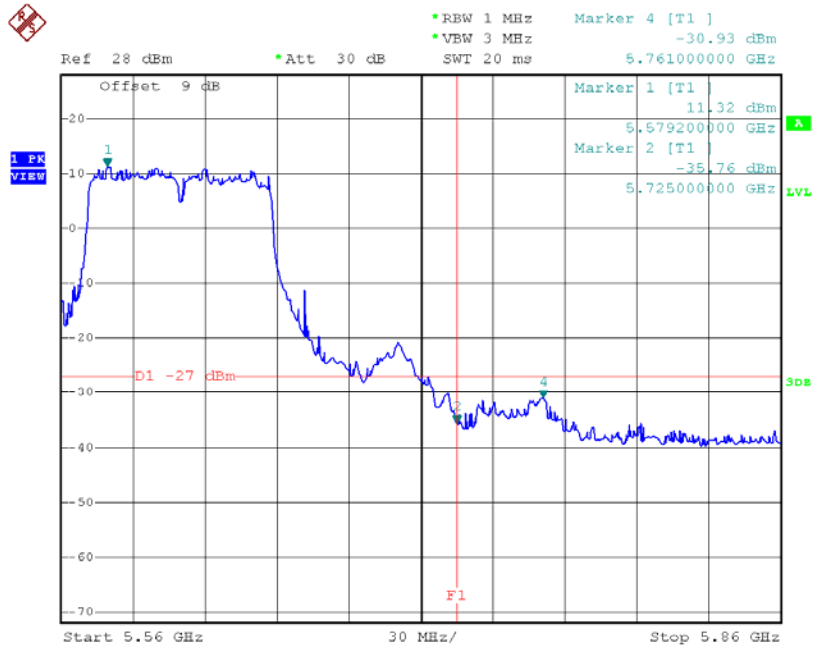

Date: 1.APR.2015 21:18:41


**Test Mode:** UNII-2C/TX AC80 Mode\_ANT 2

**TX mode CH106**

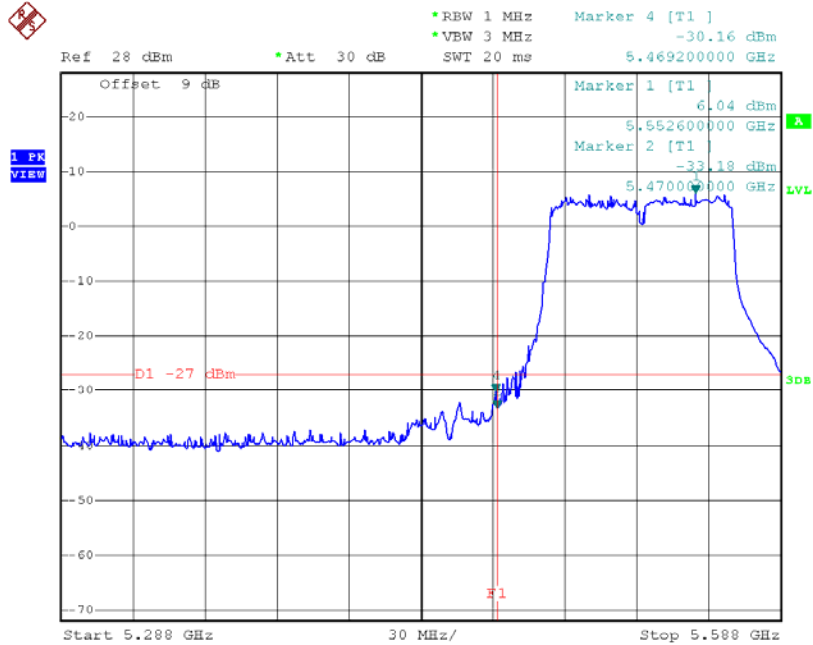

Date: 1.APR.2015 21:59:38


**TX mode CH122**

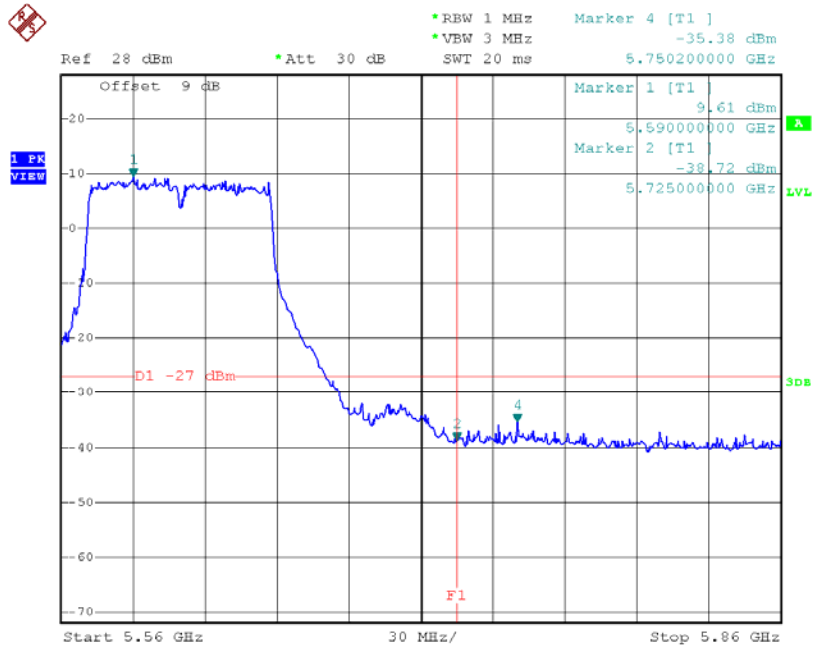

Date: 1.APR.2015 22:00:14


Test Mode: UNII-3/TX AC20 Mode\_ANT 1

**TX AC HT20 mode CH149**

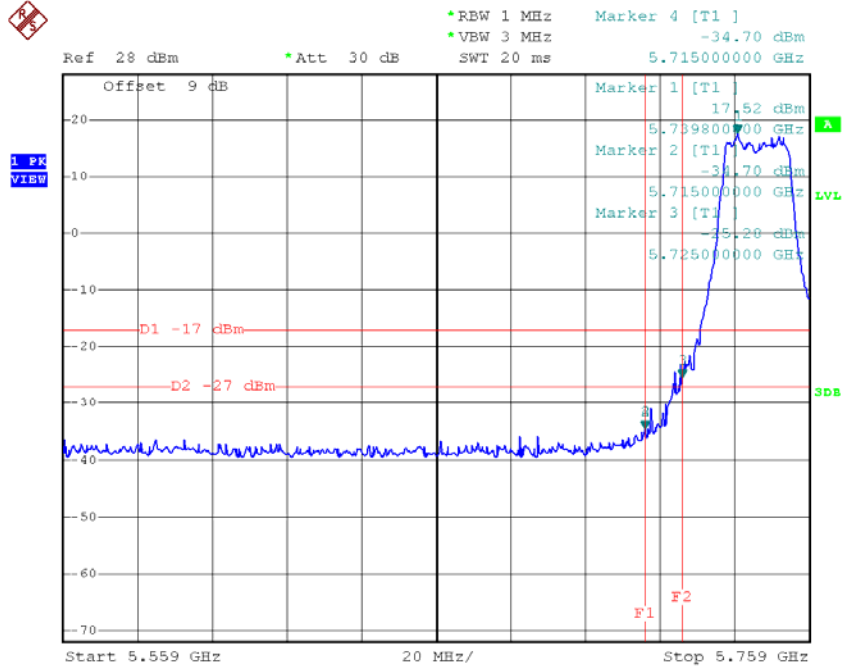

Date: 1.APR.2015 20:51:52


**TX AC HT20 mode CH165**

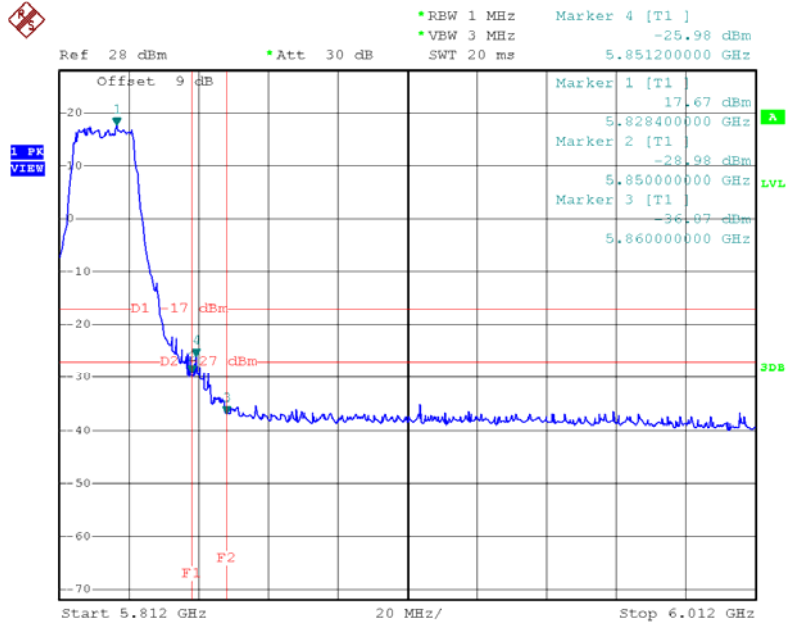

Date: 1.APR.2015 20:52:39


Test Mode: UNII-3/TX AC20 Mode\_ANT 2

**TX AC HT20 mode CH149**

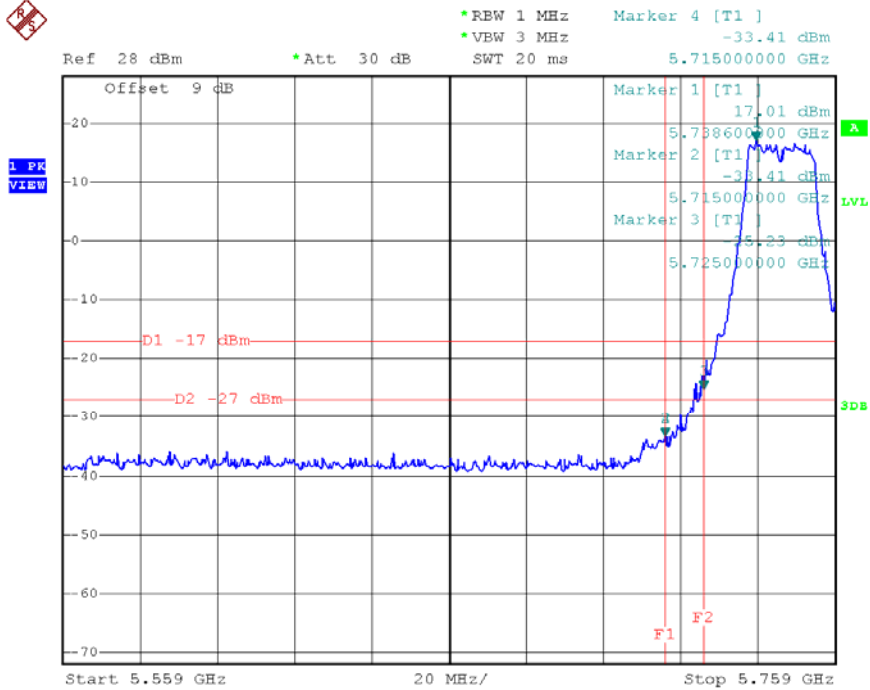

Date: 1.APR.2015 21:46:32


**TX AC HT20 mode CH165**

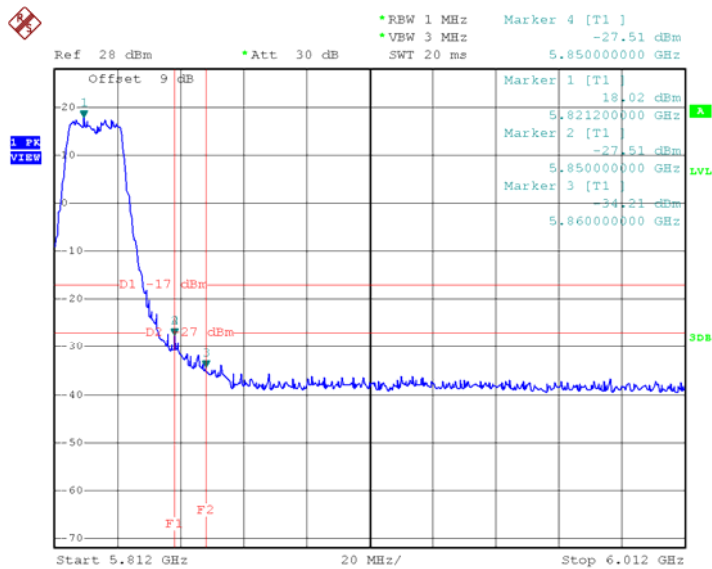

Date: 1.APR.2015 21:47:15


Test Mode: UNII-3/TX AC40 Mode\_ANT 1

### TX AC HT40 mode CH151

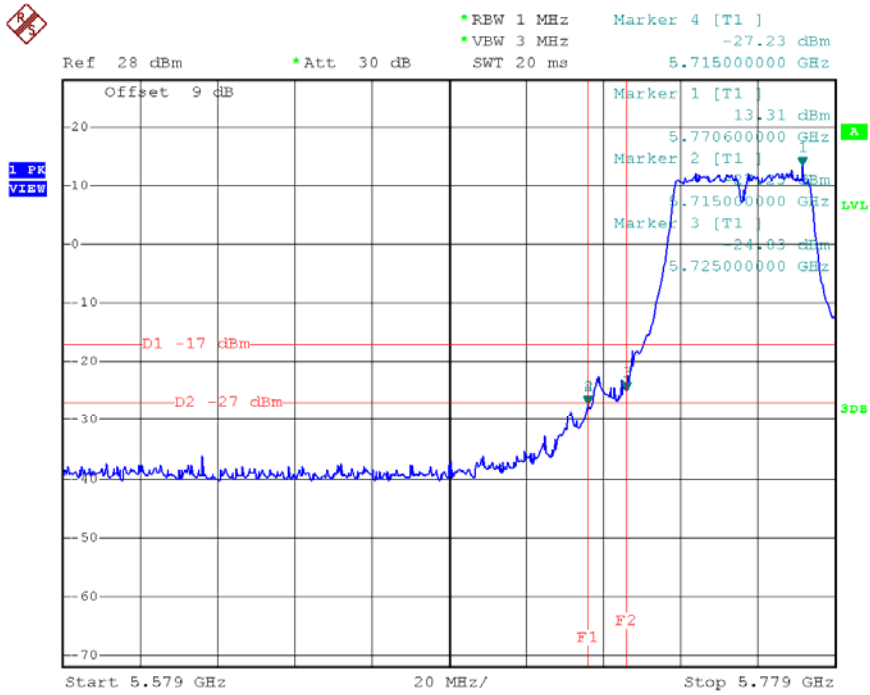

Date: 1.APR.2015 21:04:34


### TX AC HT40 mode CH159

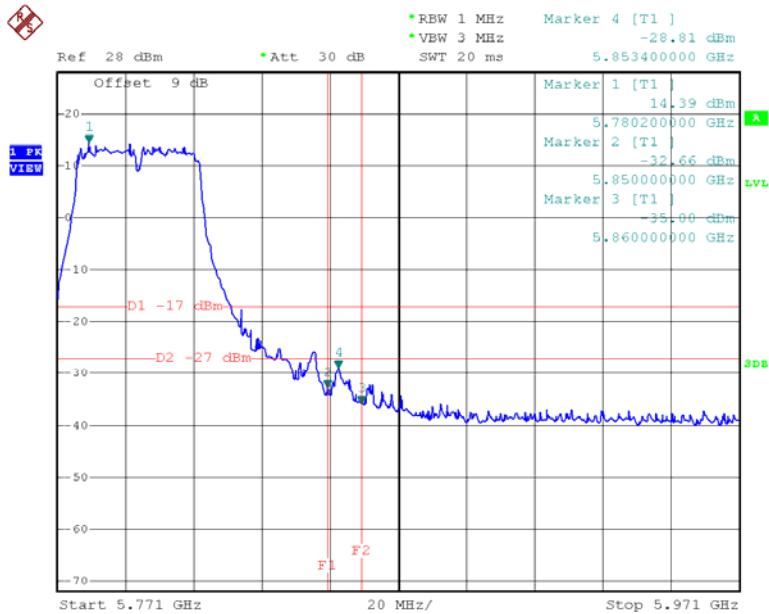

Date: 1.APR.2015 21:06:03


**Test Mode:** UNII-3/TX AC40 Mode\_ANT 2

**TX AC HT40 mode CH151**

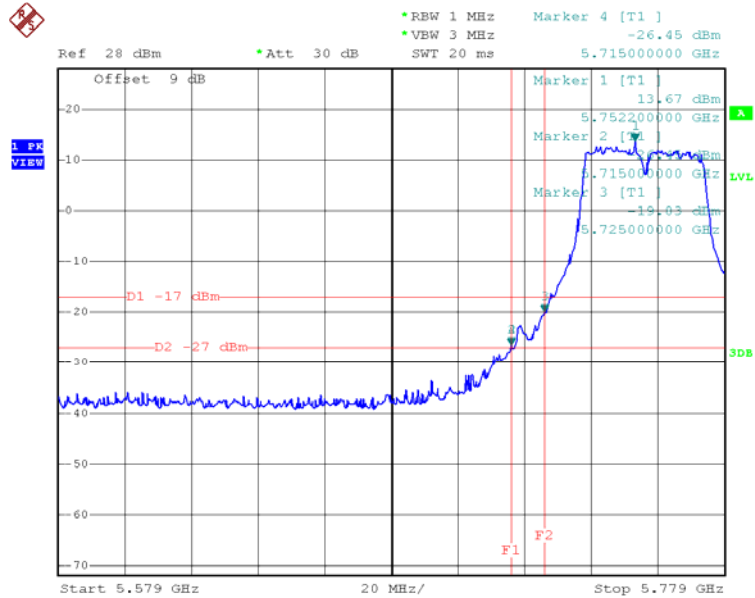

Date: 1.APR.2015 21:56:48


**TX AC HT40 mode CH159**

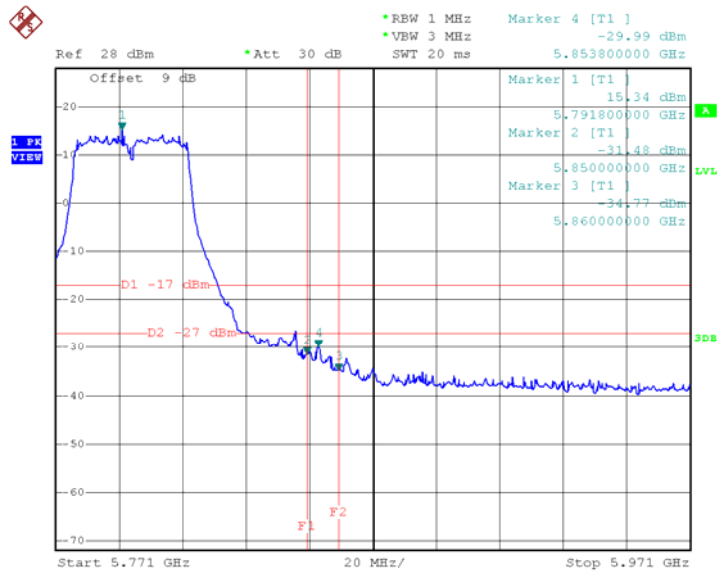


Date: 1.APR.2015 21:57:30

Test Mode: UNII-3/TX AC80 Mode\_ANT 1

TX AC HT80 mode CH155

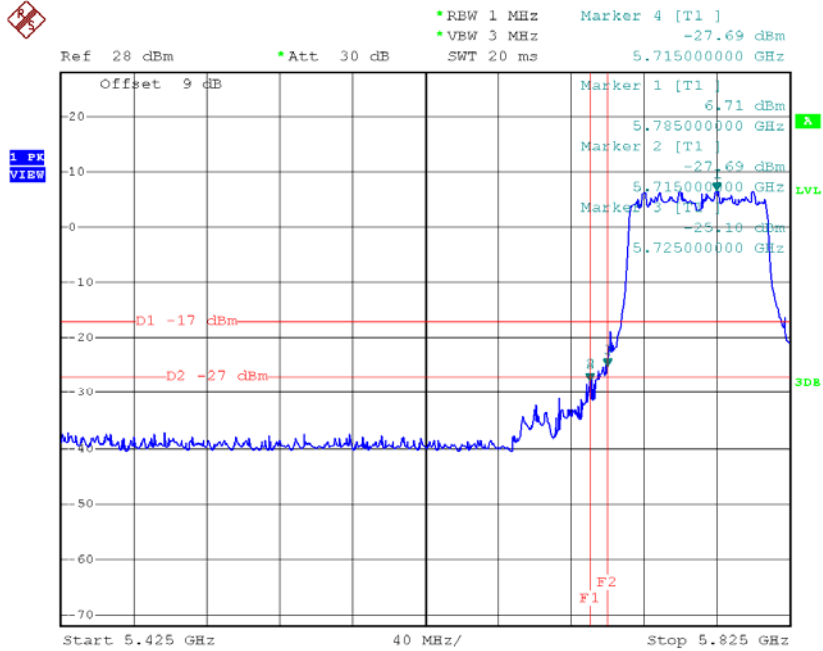


Date: 1.APR.2015 21:21:17

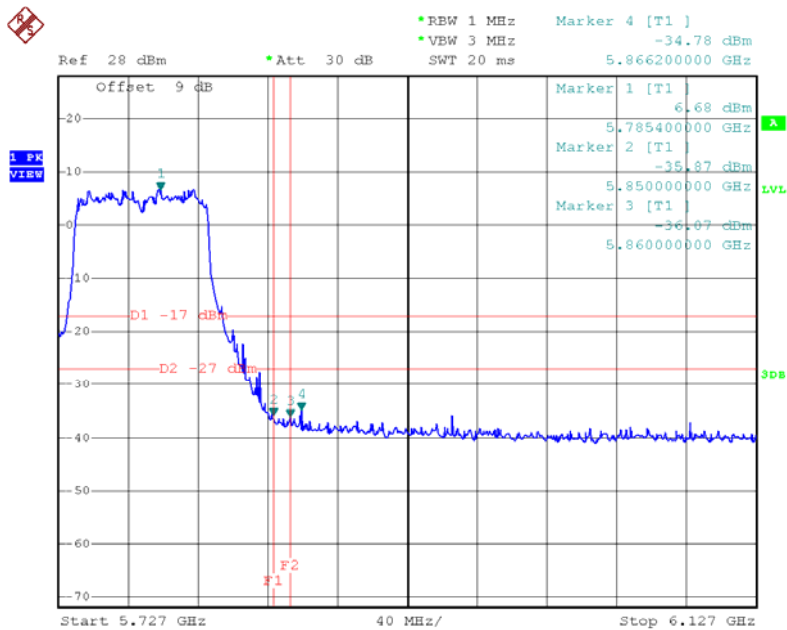


Date: 1.APR.2015 21:21:24

Test Mode: UNII-3/TX AC80 Mode\_ANT 2

**TX AC HT80 mode CH155**

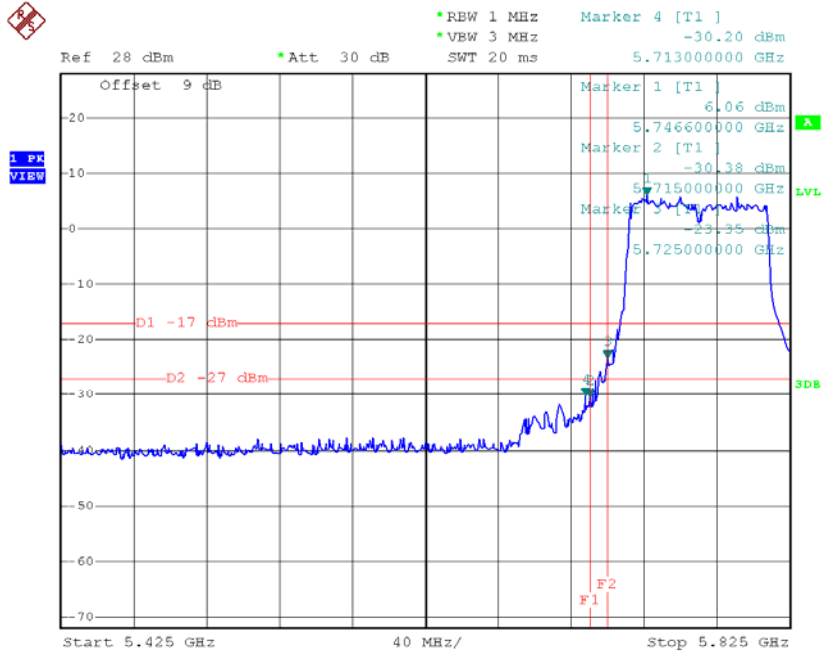

Date: 1.APR.2015 22:01:06

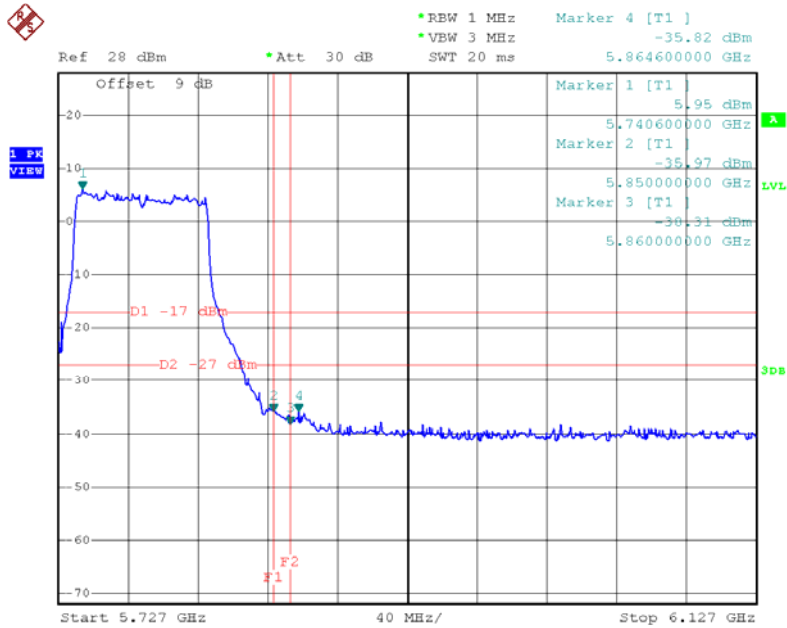


Date: 1.APR.2015 22:01:13

## **ATTACHMENT H - POWER SPECTRAL DENSITY**

# For 1TX


**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.95	0.03	3.98	15.00
CH40	5200	3.85	0.03	3.88	15.00
CH48	5240	3.90	0.03	3.93	15.00

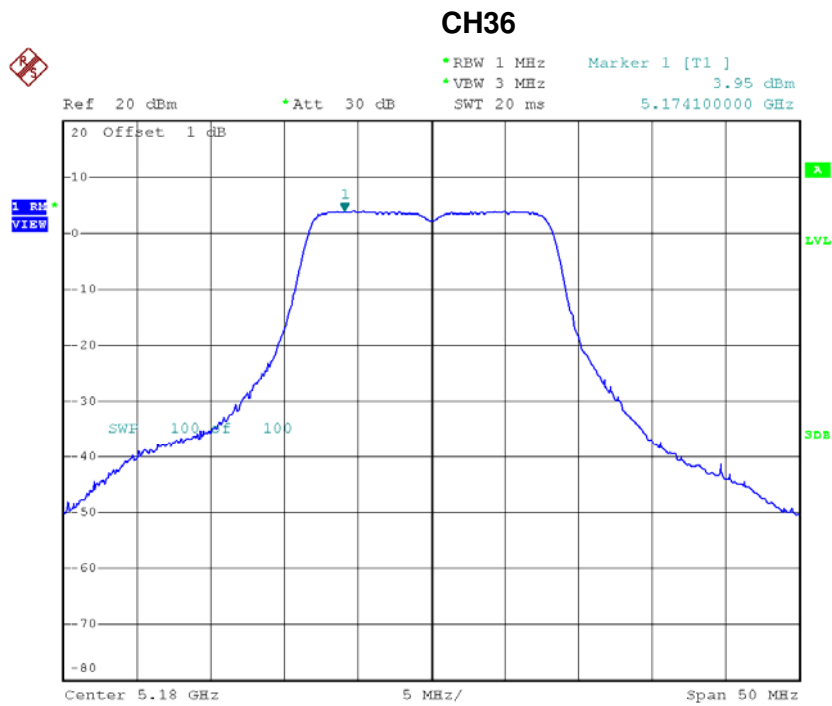


Date: 1.APR.2015 15:21:59

**CH40**

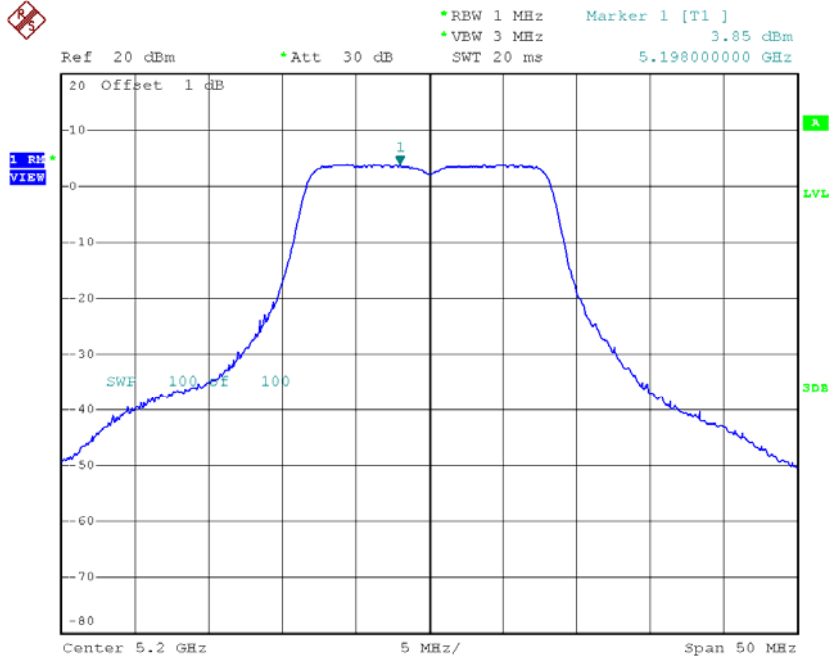

Date: 1.APR.2015 15:25:44


**CH48**

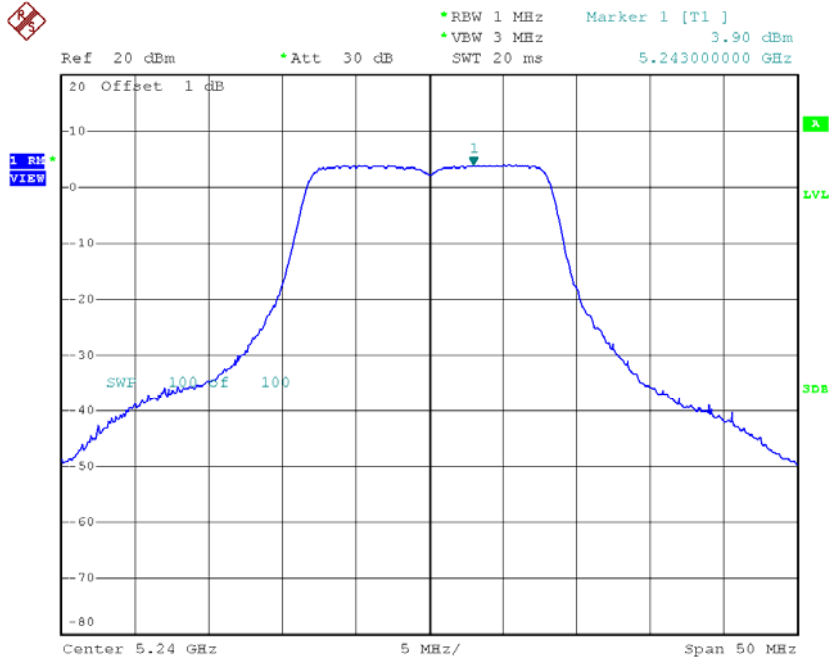

Date: 1.APR.2015 15:26:38


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.68	0.10	3.78	15.00
CH40	5200	3.61	0.10	3.71	15.00
CH48	5240	3.69	0.10	3.79	15.00

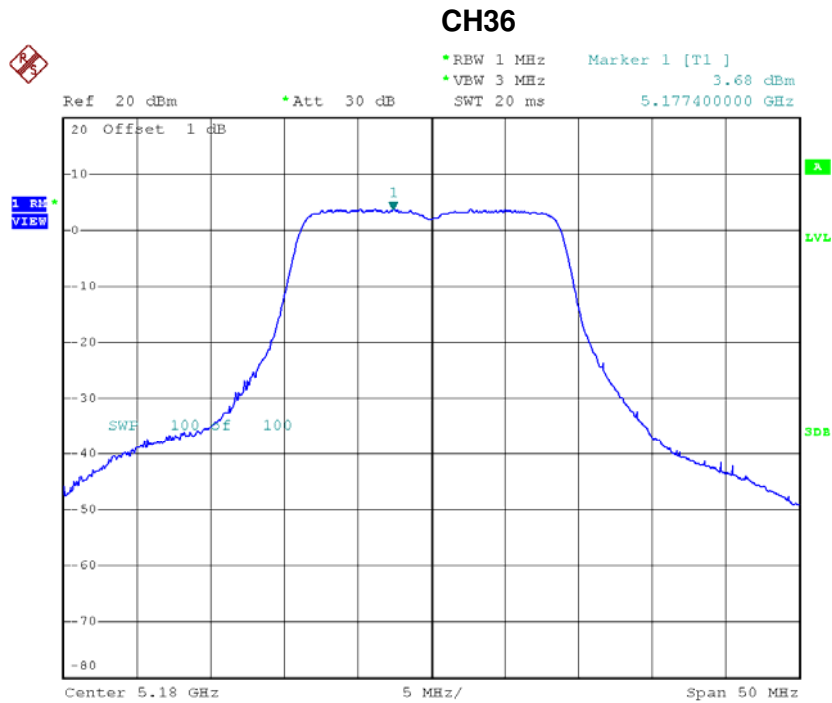


Date: 1.APR.2015 15:49:41

**CH40**

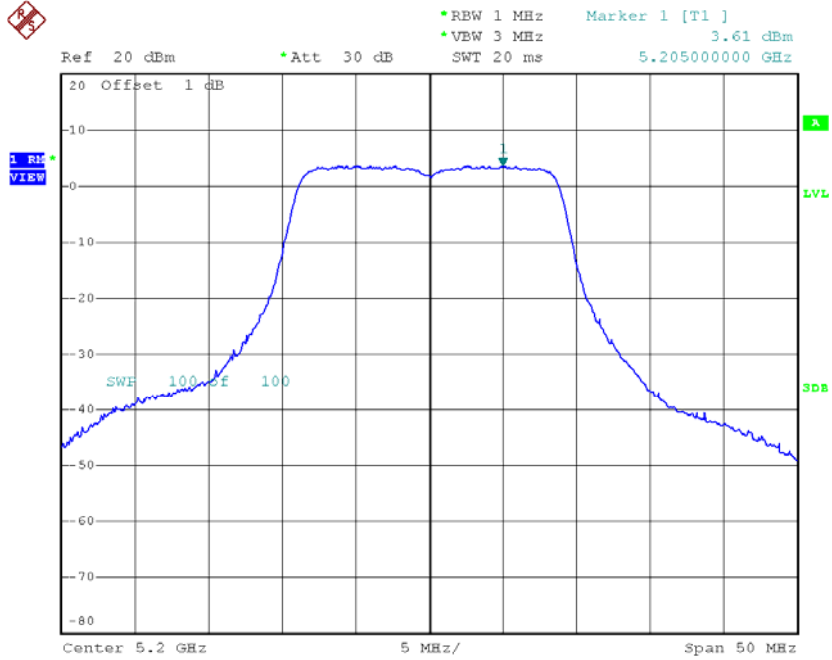

Date: 1.APR.2015 15:50:49

**CH48**

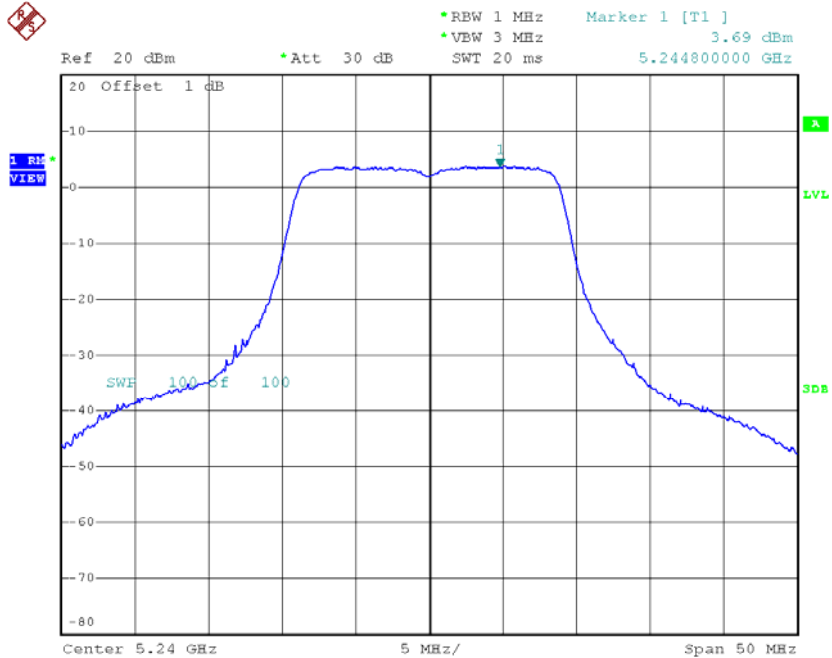


Date: 1.APR.2015 15:51:28

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-1.47	0.13	-1.34	15.00
CH46	5230	-1.47	0.13	-1.34	15.00

### CH38

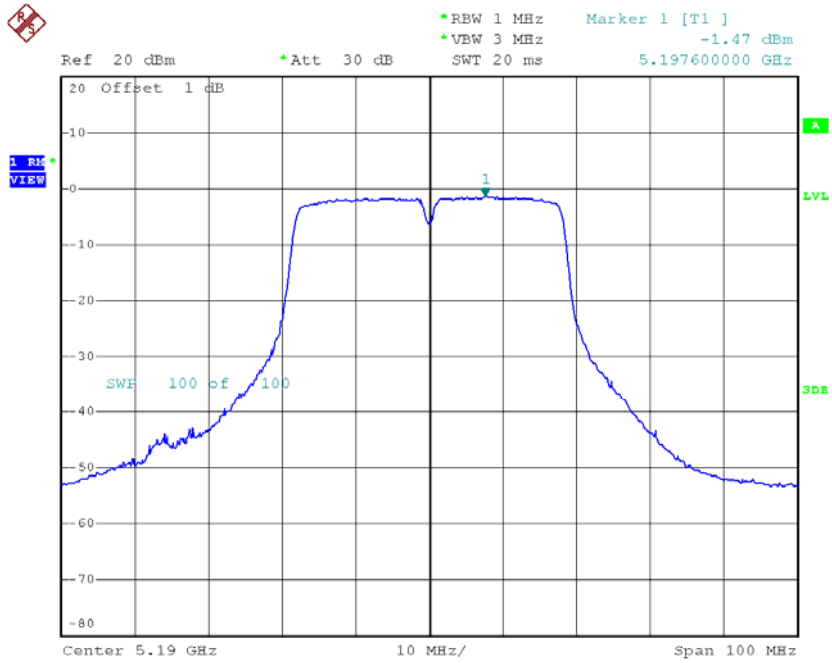

Date: 1.APR.2015 19:38:58


### CH46

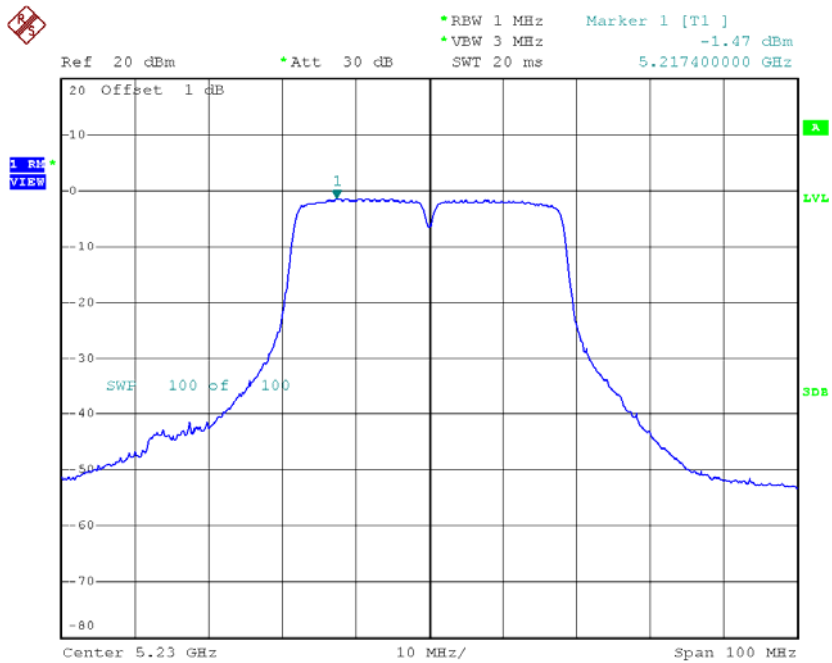

Date: 1.APR.2015 19:41:23




### CH60

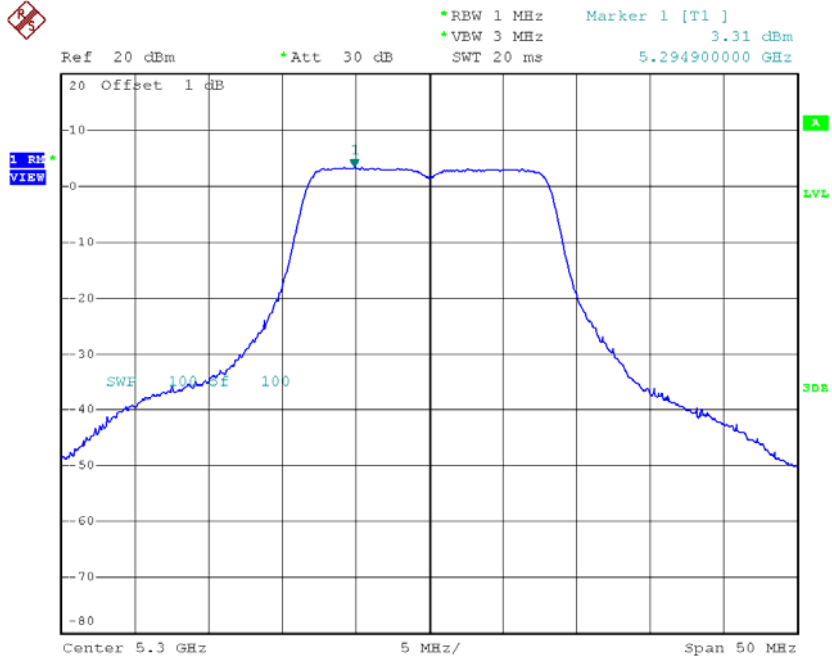

Date: 1.APR.2015 15:29:35


### CH64

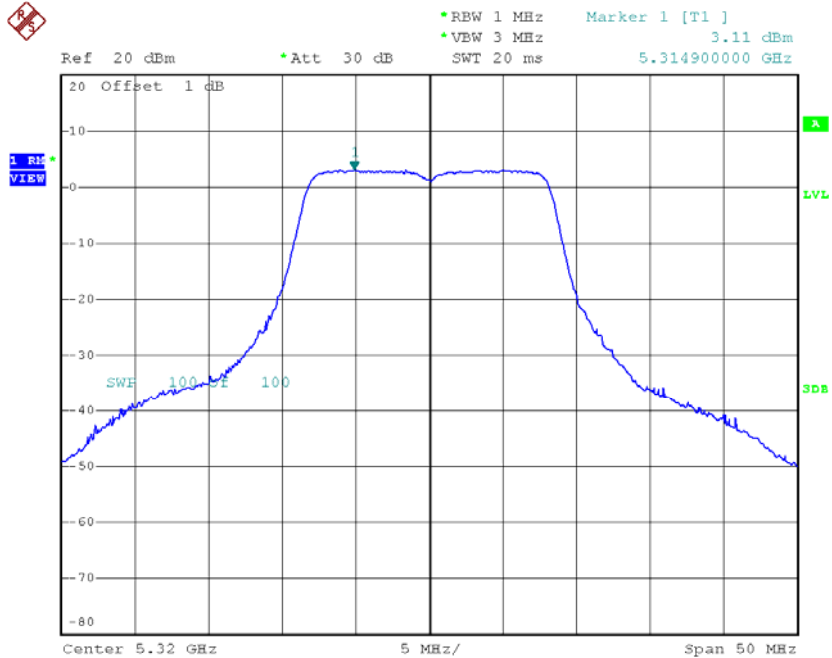

Date: 1.APR.2015 15:30:20


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	3.91	0.10	4.01	9.00
CH60	5300	3.12	0.10	3.22	9.00
CH64	5320	2.86	0.10	2.96	9.00

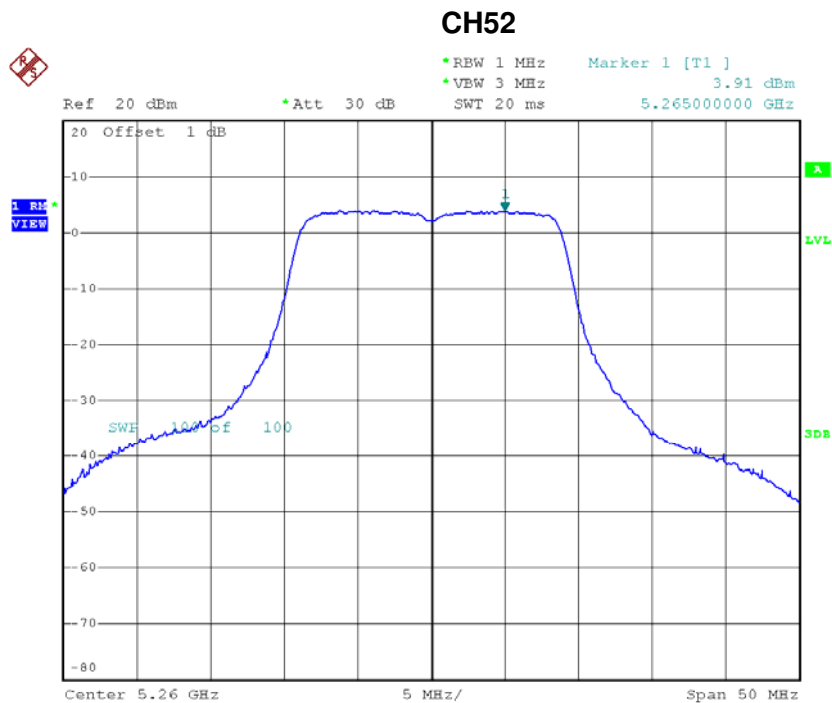


Date: 1.APR.2015 15:52:11

### CH60

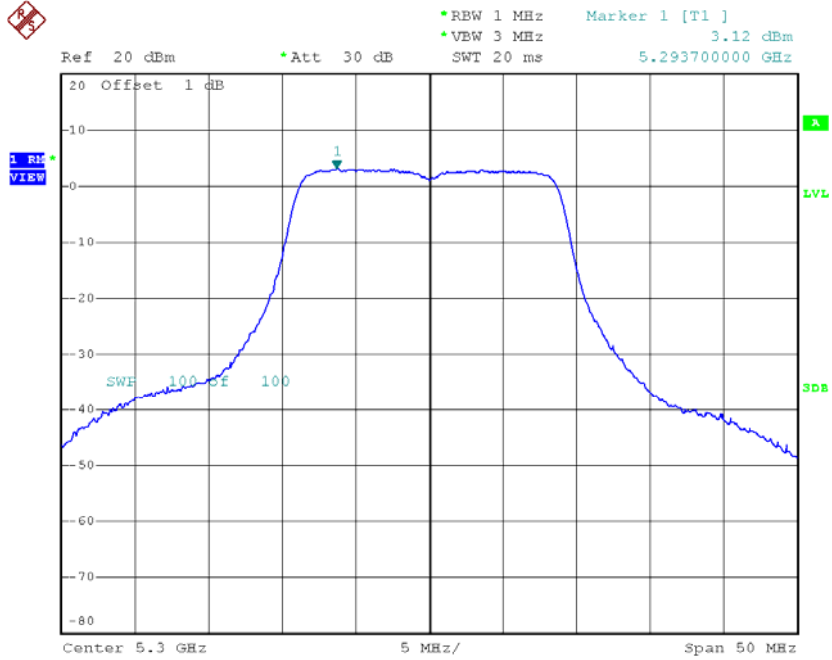

Date: 1.APR.2015 15:53:09

### CH64

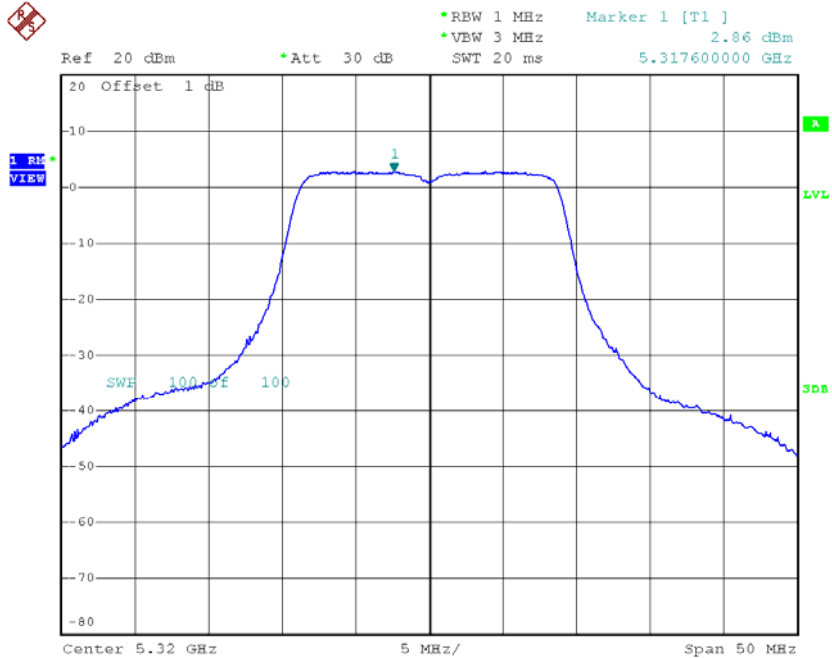


Date: 1.APR.2015 15:53:44

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.85	0.13	-1.72	9.00
CH62	5310	-1.80	0.13	-1.67	9.00

### CH54

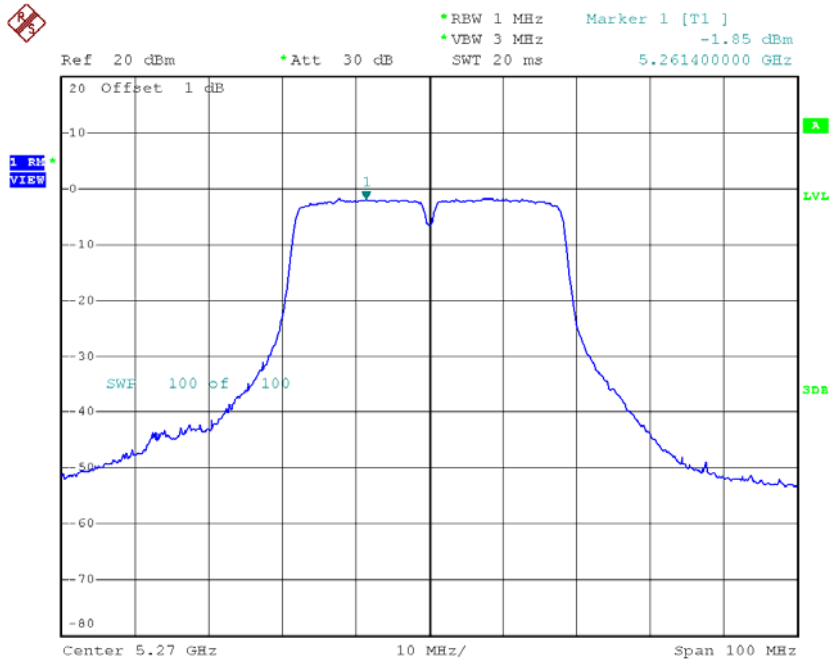

Date: 1.APR.2015 19:42:04


### CH62

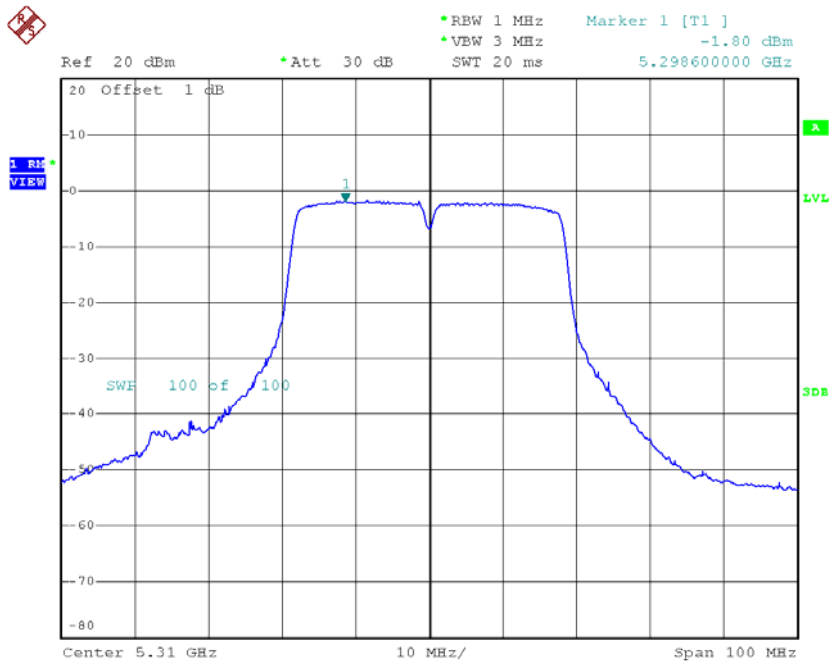

Date: 1.APR.2015 19:42:57


**Test Mode: UNII-2C/ TX A Mode\_CH100/CH116/CH140**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	3.39	0.03	3.42	9.00
CH116	5580	2.28	0.03	2.31	9.00
CH140	5700	2.86	0.03	2.89	9.00

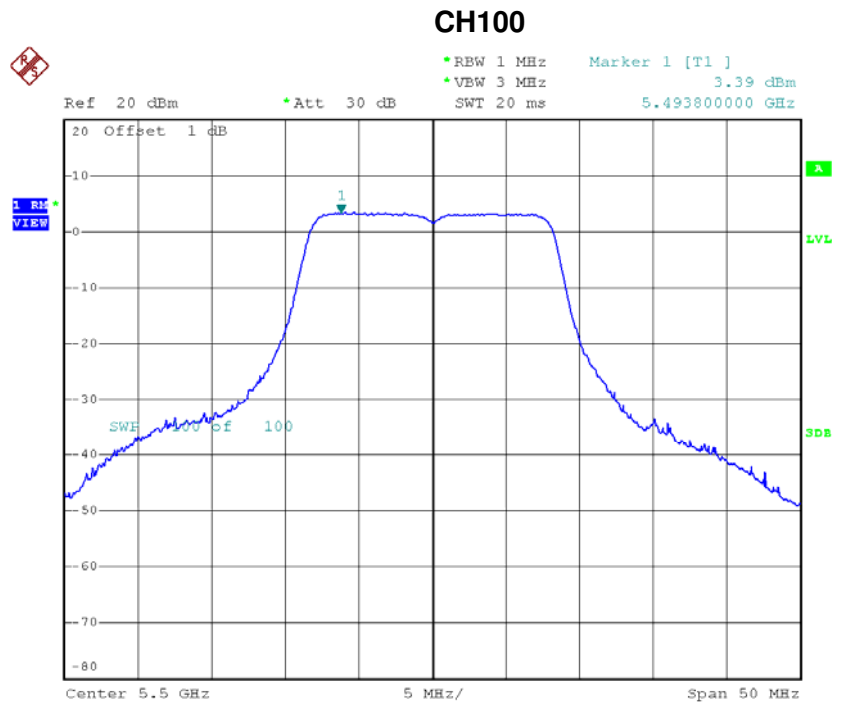


Date: 1.APR.2015 15:31:10

### CH116

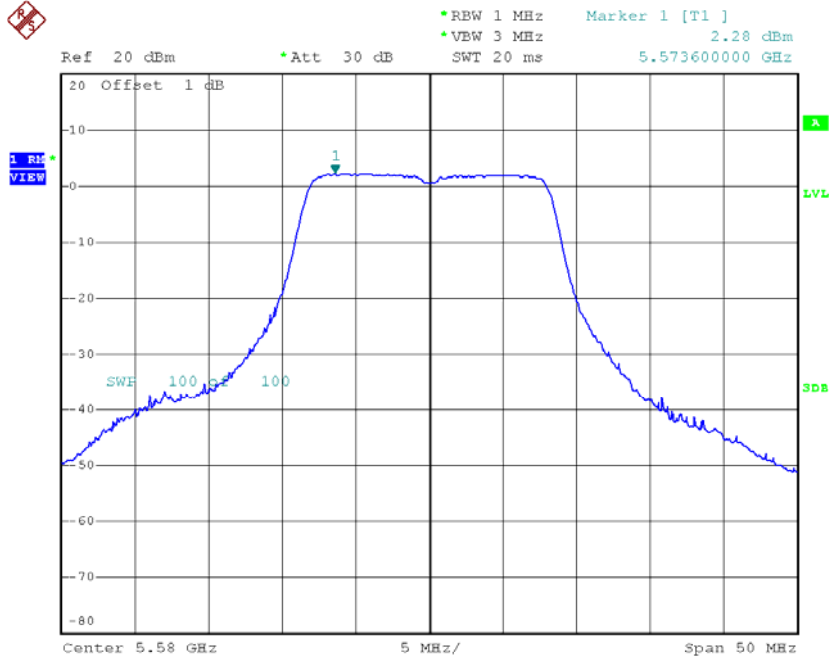

Date: 1.APR.2015 15:32:45

### CH140

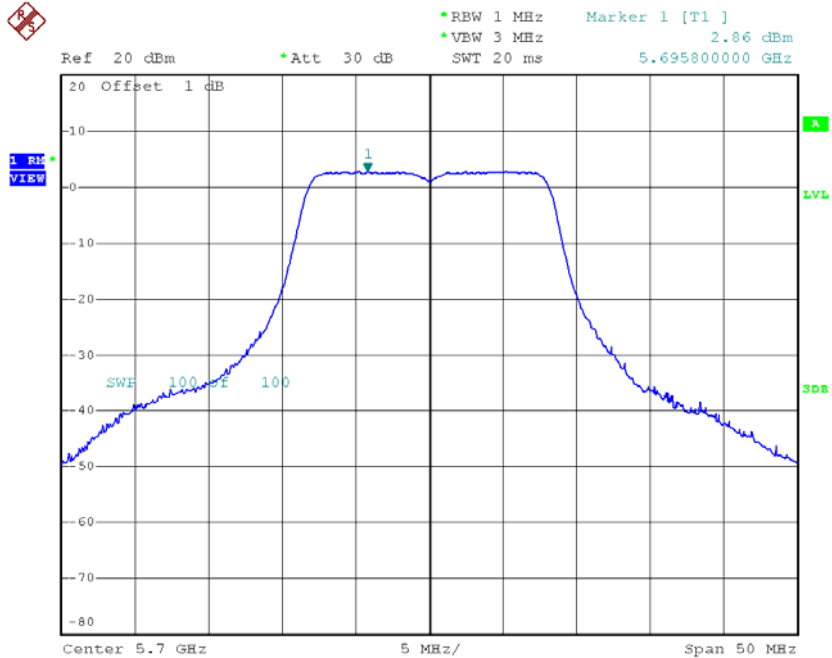


Date: 1.APR.2015 15:33:37

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	3.24	0.10	3.34	9.00
CH116	5580	1.89	0.10	1.99	9.00
CH140	5700	2.69	0.10	2.79	9.00

**CH100**

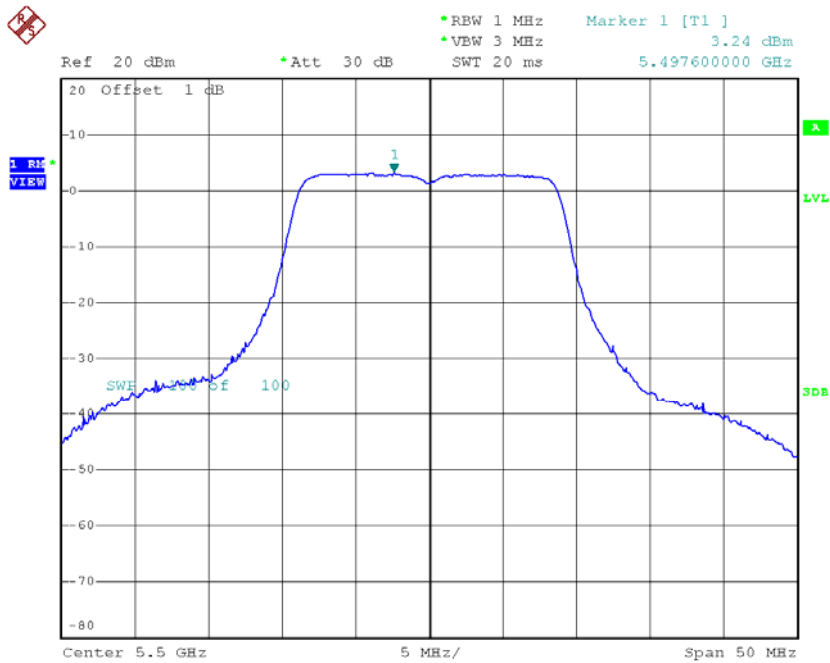


Date: 1.APR.2015 15:54:21

### CH116

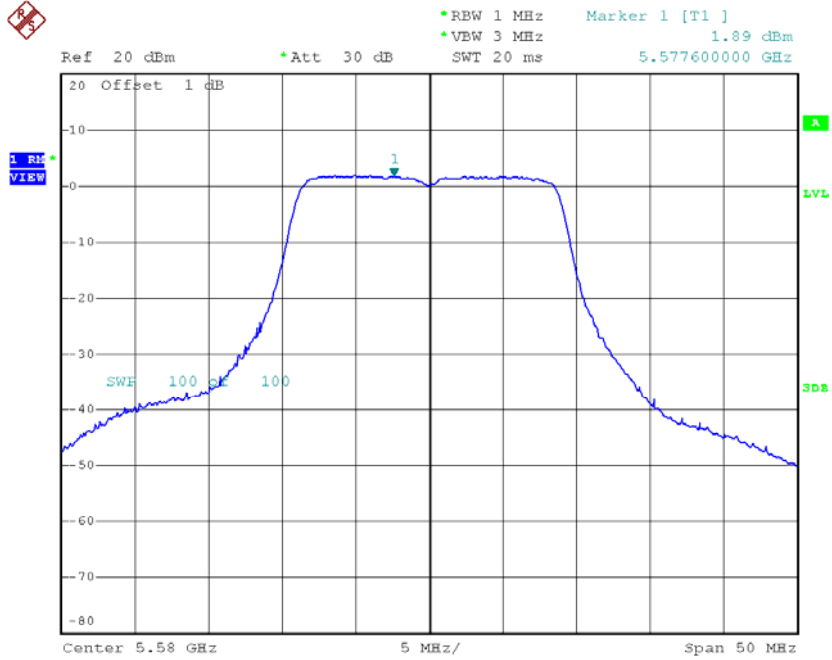

Date: 1.APR.2015 15:55:21

### CH140

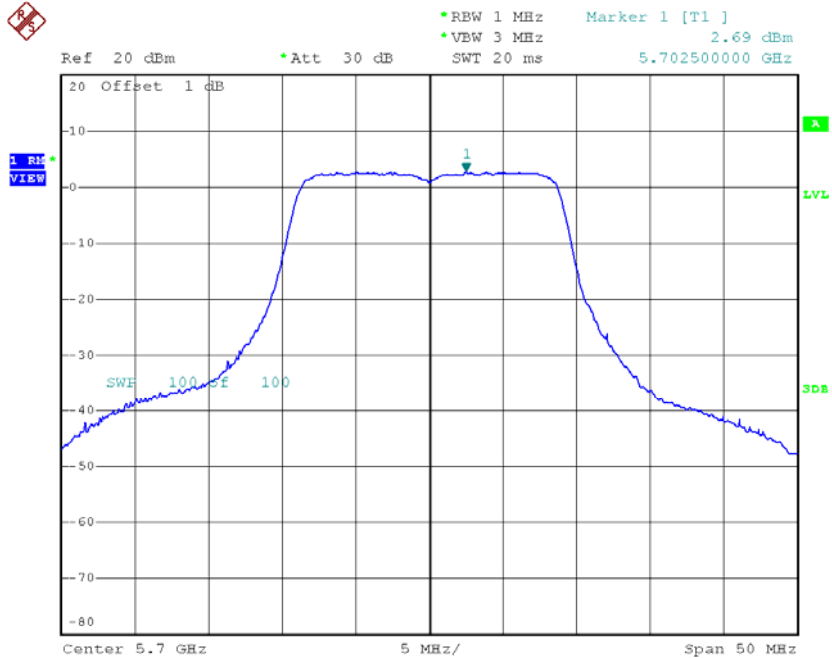


Date: 1.APR.2015 15:55:53

**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-2.08	0.13	-1.95	9.00
CH110	5550	-2.39	0.13	-2.26	9.00
CH134	5670	-3.11	0.13	-2.98	9.00

**CH102**

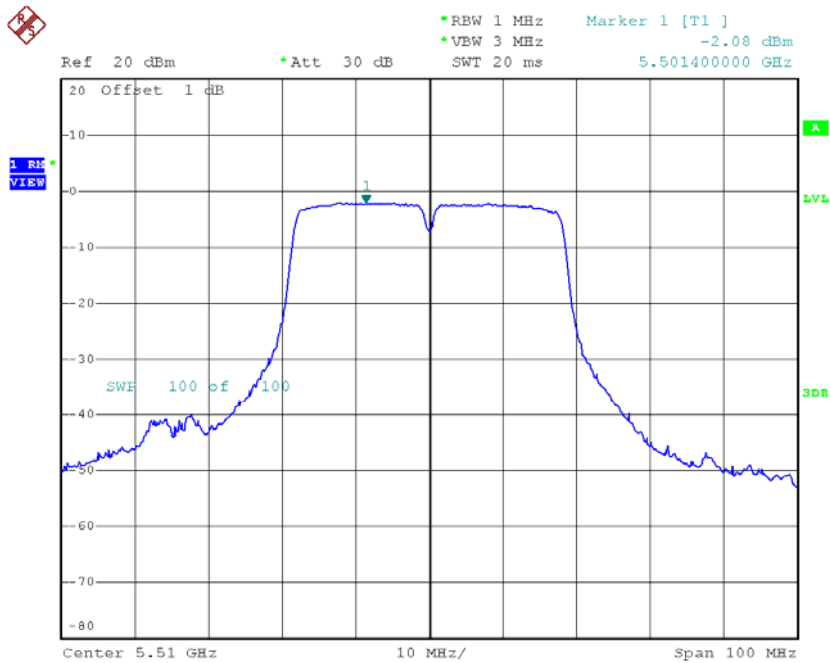


Date: 1.APR.2015 19:43:40

### CH110

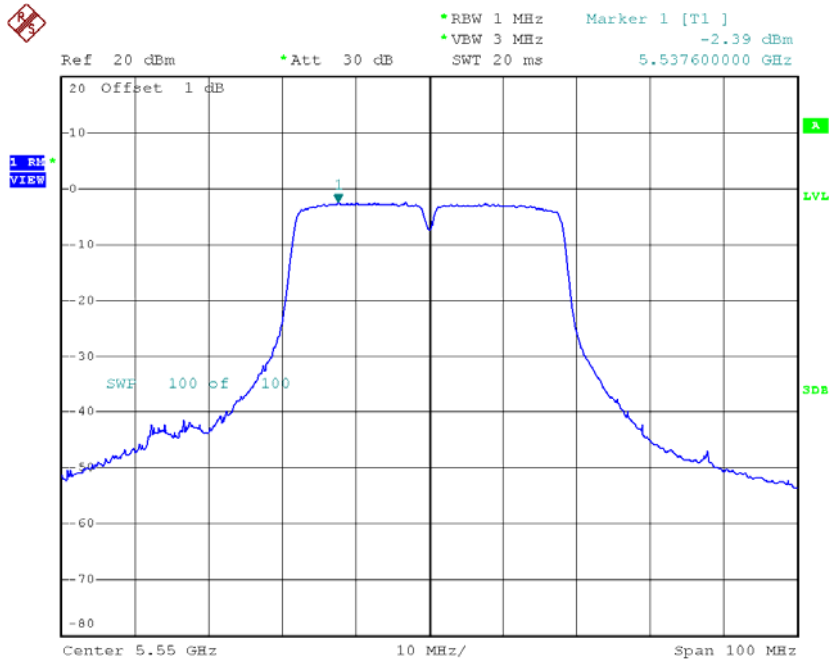

Date: 1.APR.2015 19:45:22

### CH134

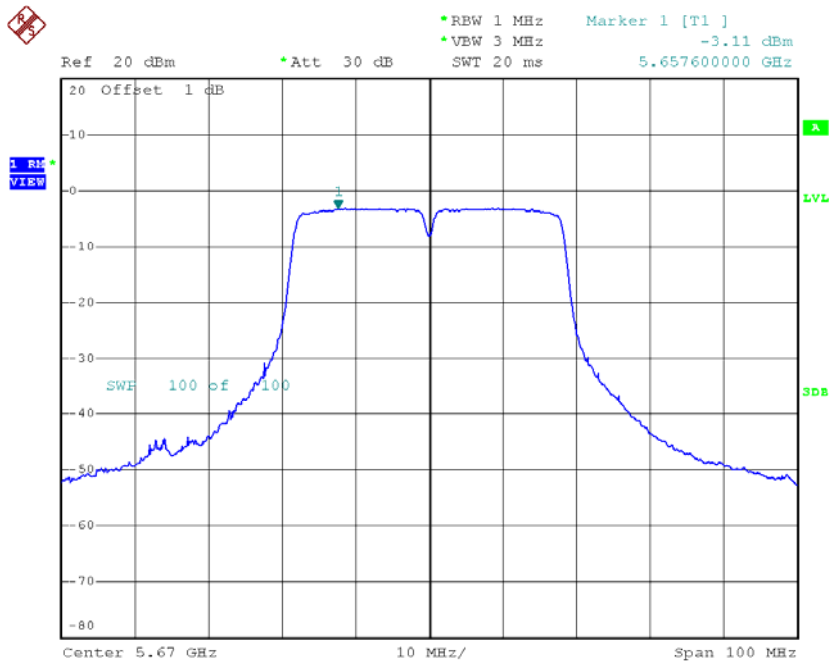


Date: 1.APR.2015 19:45:54

**Test Mode: UNII-3/TX A Mode\_CH149/CH157/CH165**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH149	5745	-0.15	0.03	-0.12	28.00
CH157	5785	-0.02	0.03	0.01	28.00
CH165	5825	0.50	0.03	0.53	28.00

**TX CH149**

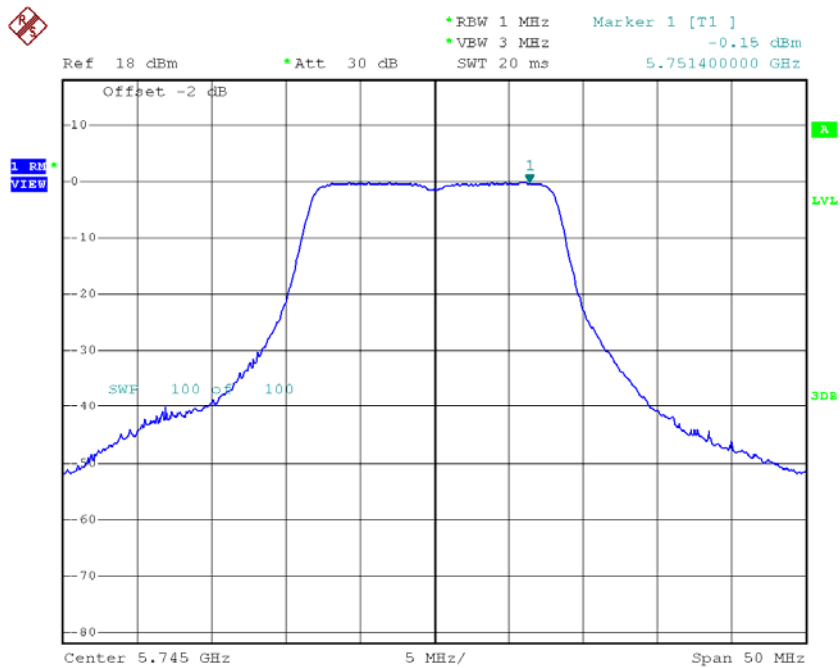


Date: 1.APR.2015 15:37:21

**TX CH157**

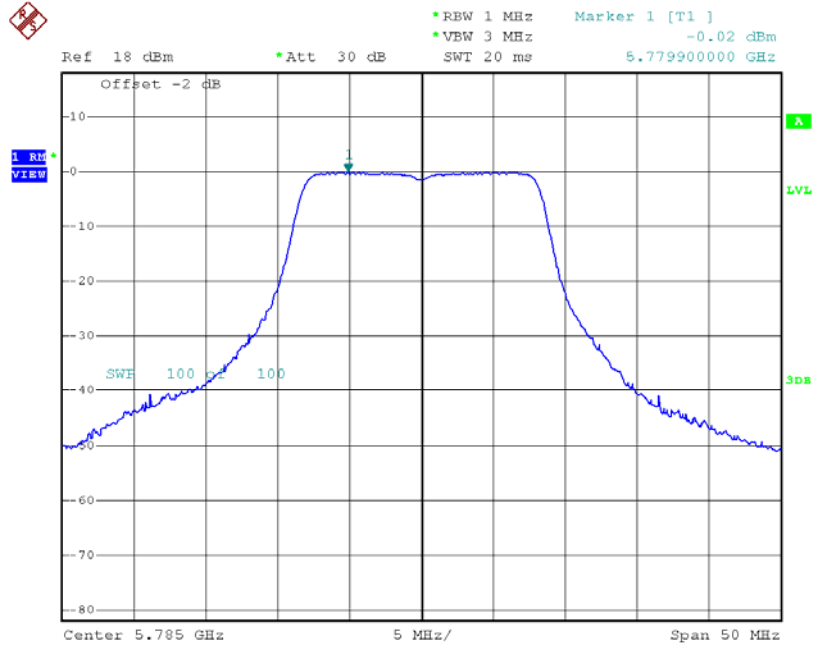

Date: 1.APR.2015 15:43:46


**TX CH165**

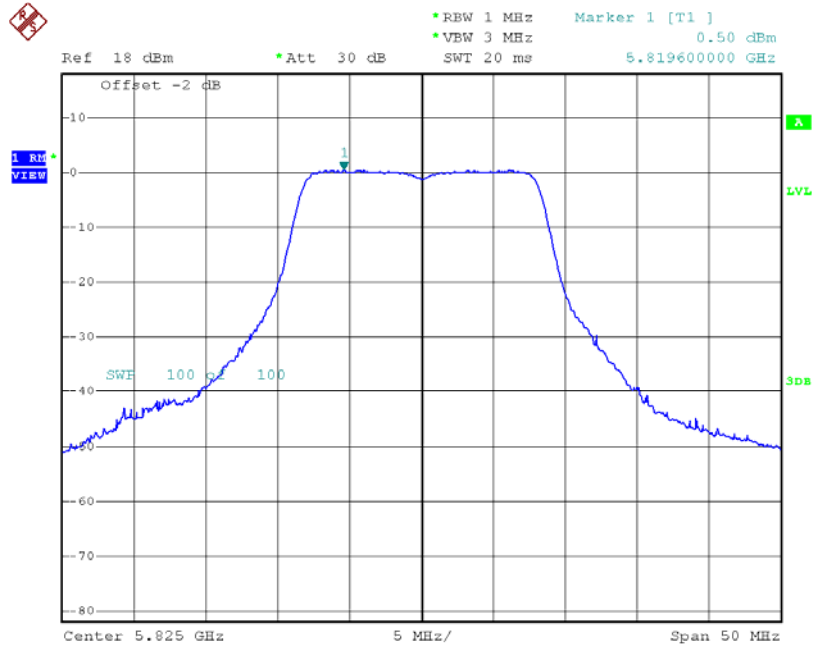

Date: 1.APR.2015 15:47:39




### TX CH157

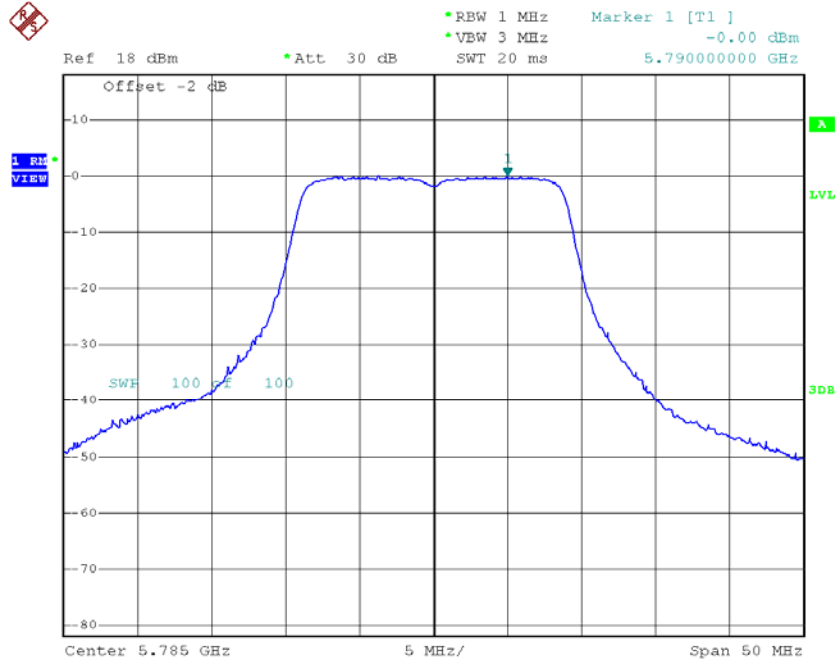

Date: 1.APR.2015 15:57:33

### TX CH165

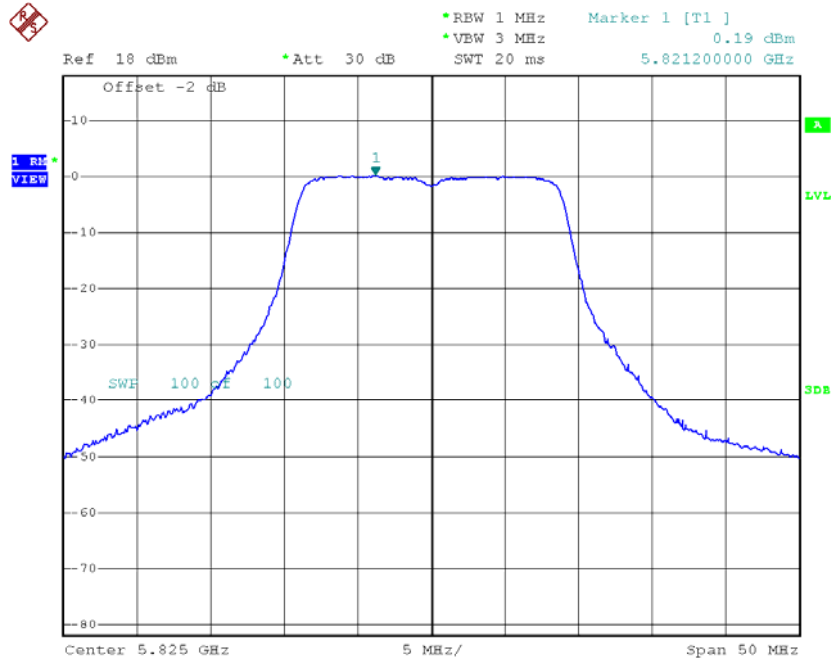


Date: 1.APR.2015 15:58:10

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH151	5755	-5.03	0.13	-4.90	28.00
CH159	5795	-4.71	0.13	-4.58	28.00

**TX CH151**

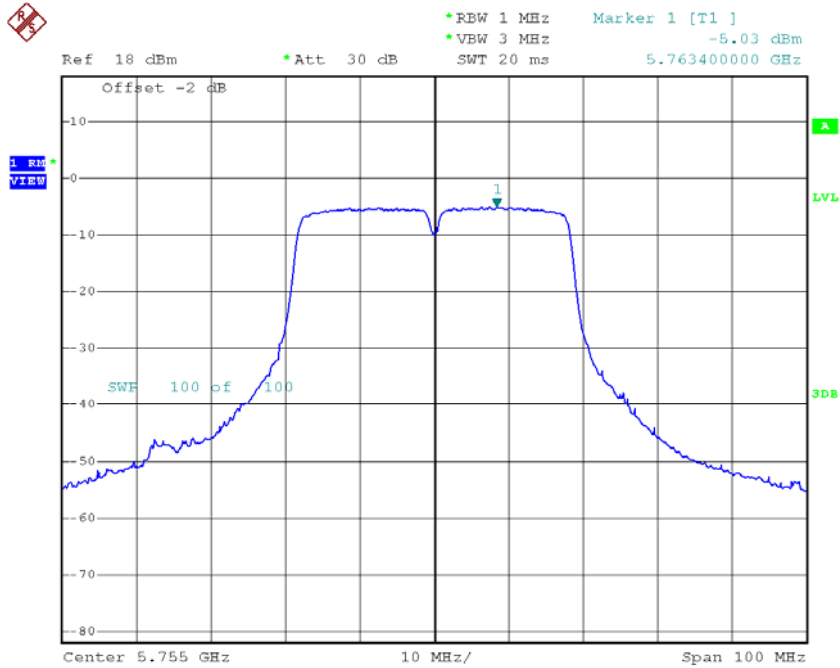

Date: 1.APR.2015 19:46:36


**TX CH159**

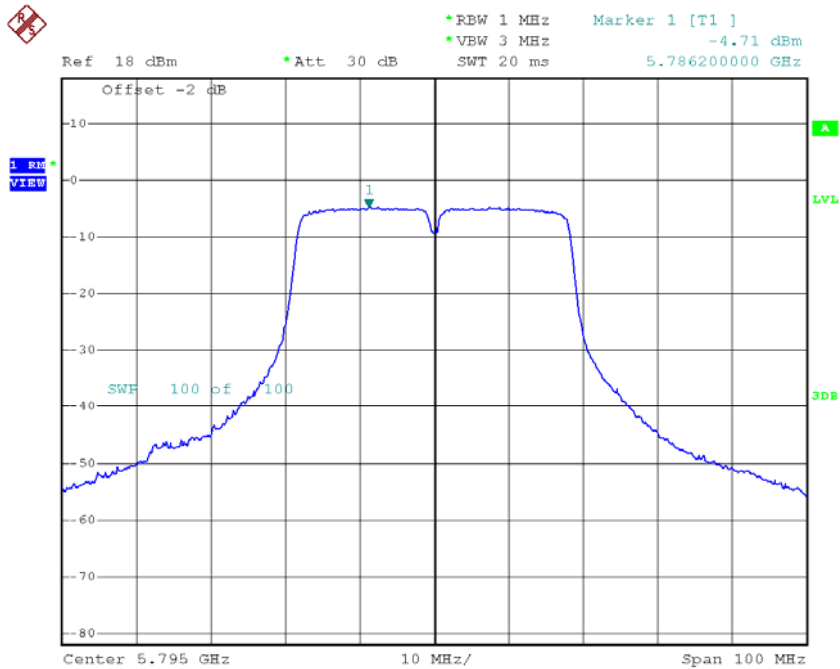

Date: 1.APR.2015 19:47:38




### CH40

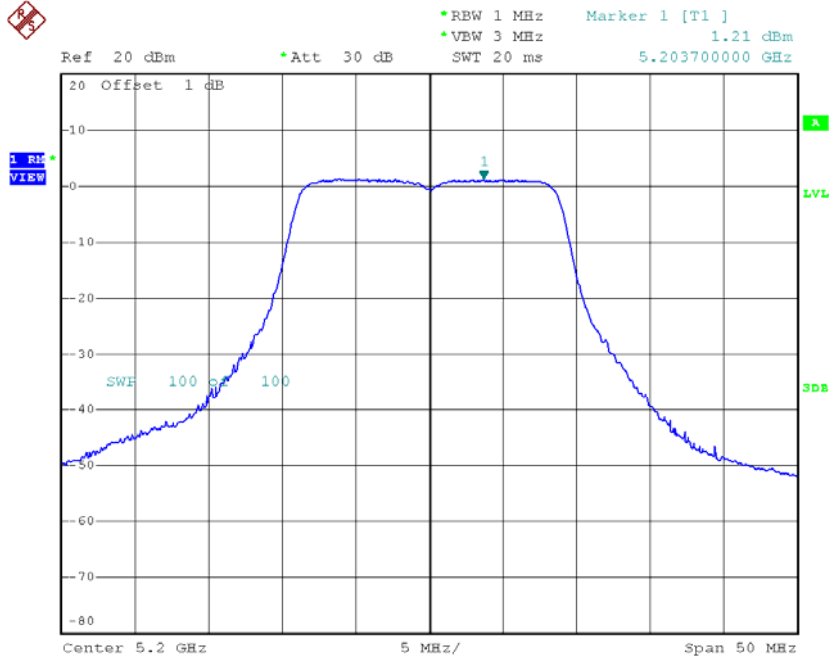

Date: 1.APR.2015 16:01:06

### CH48

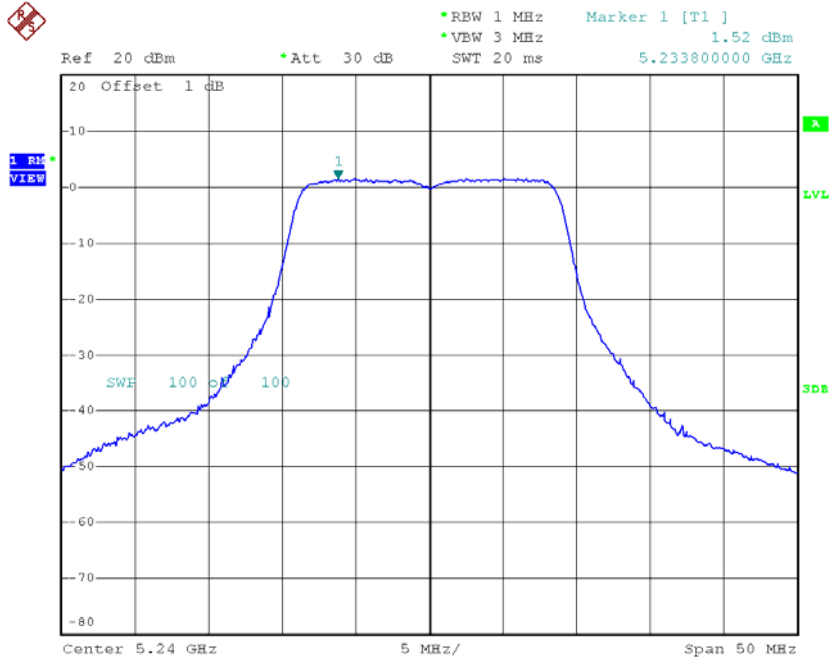


Date: 1.APR.2015 16:02:52

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-1.55	0.19	-1.36	15.00
CH46	5230	-1.54	0.19	-1.35	15.00

### CH38

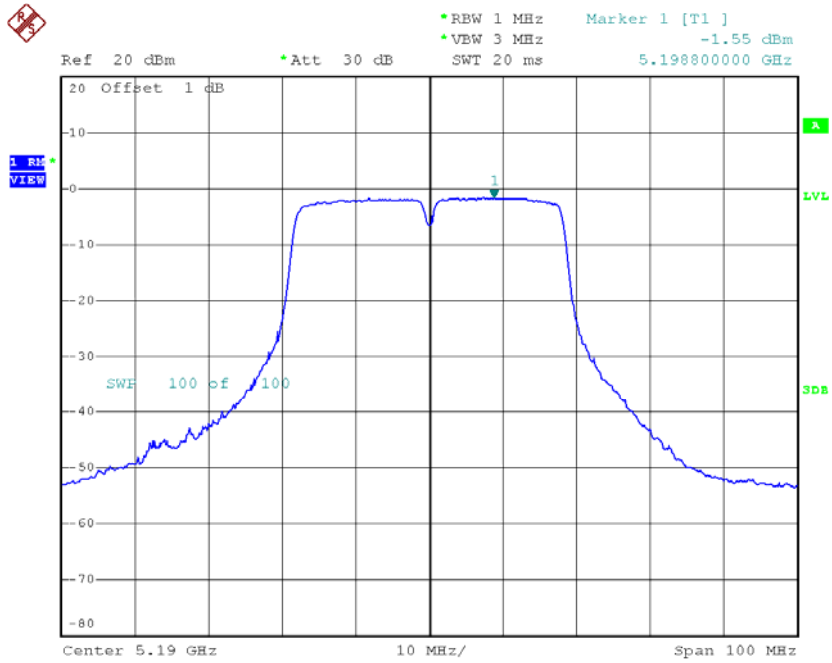

Date: 1.APR.2015 19:48:33

### CH46

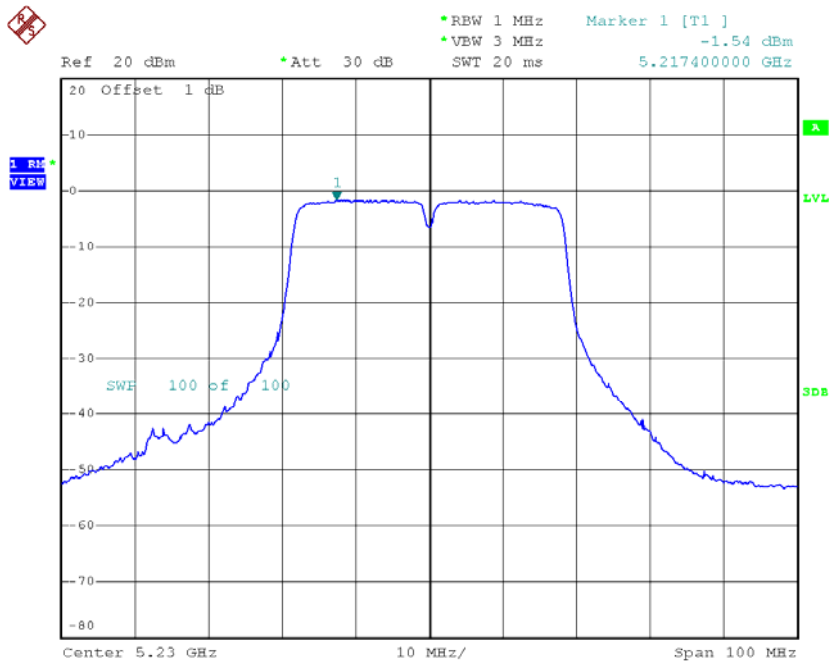


Date: 1.APR.2015 19:49:30






### CH60

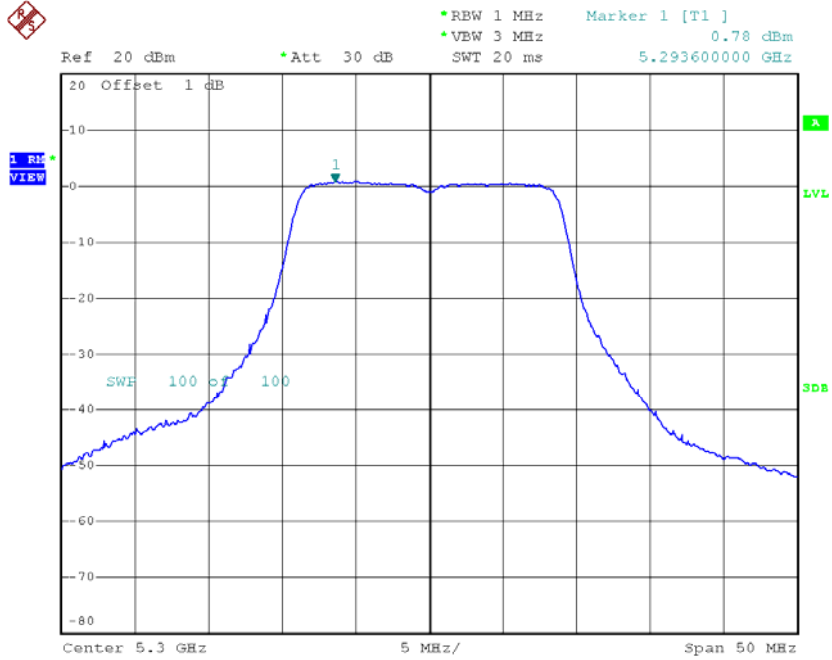

Date: 1.APR.2015 16:05:01


### CH64

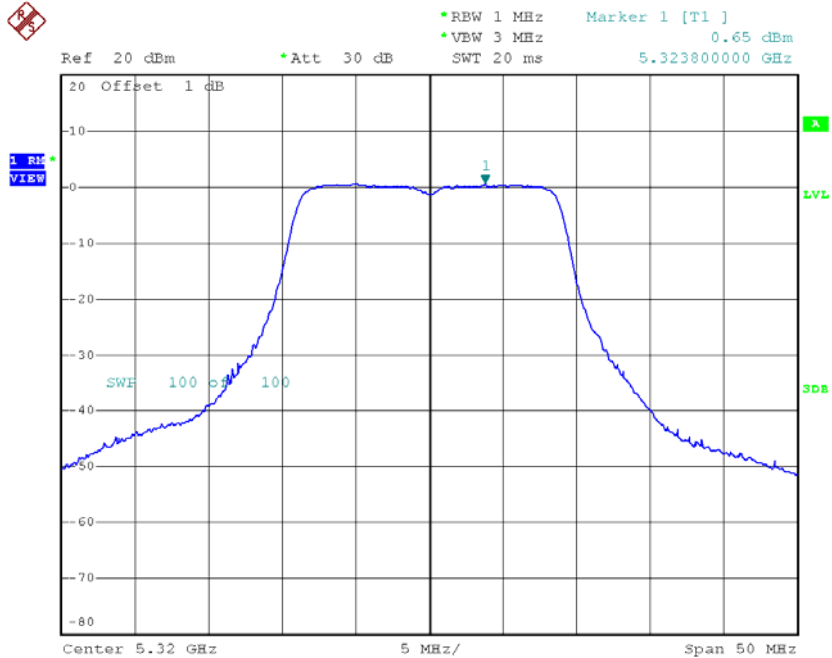


Date: 1.APR.2015 16:06:44

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.95	0.19	-1.76	9.00
CH62	5310	-1.86	0.19	-1.67	9.00

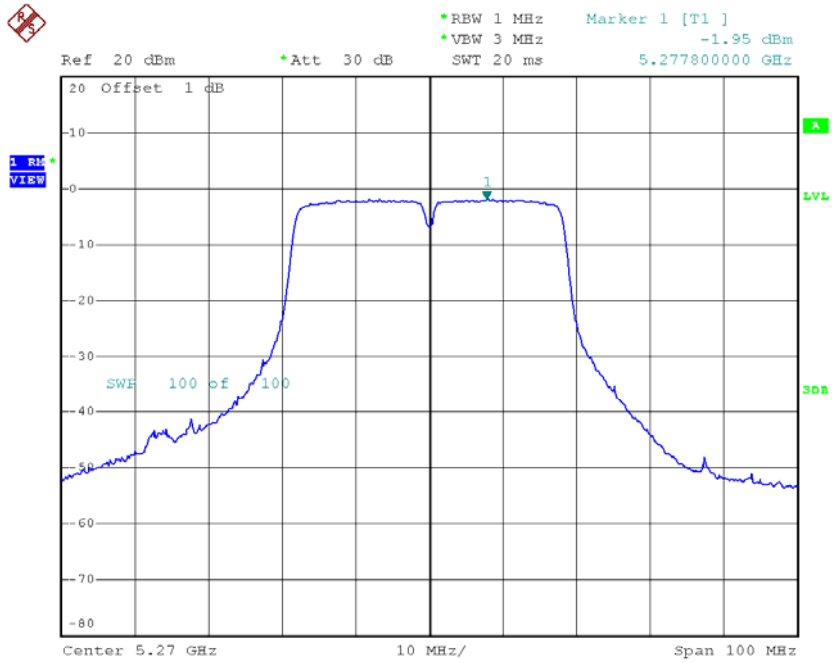**CH54**

Date: 1.APR.2015 19:50:08

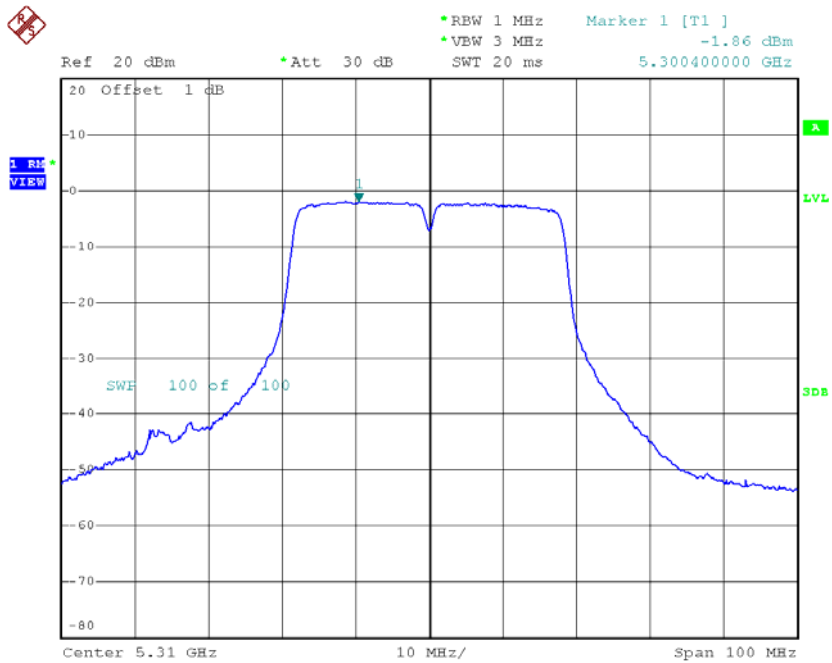
**CH62**

Date: 1.APR.2015 19:50:57






### CH116

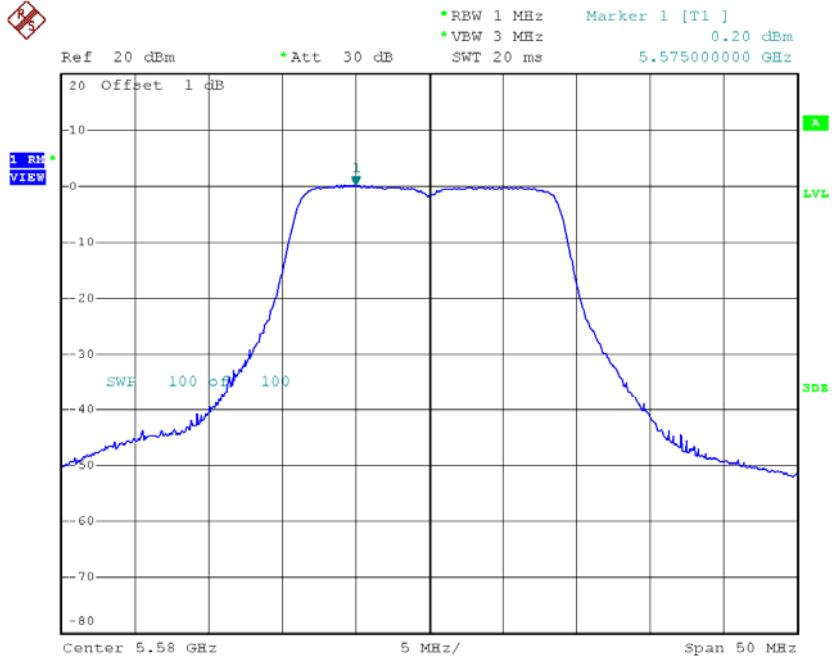

Date: 1.APR.2015 16:09:27

### CH140

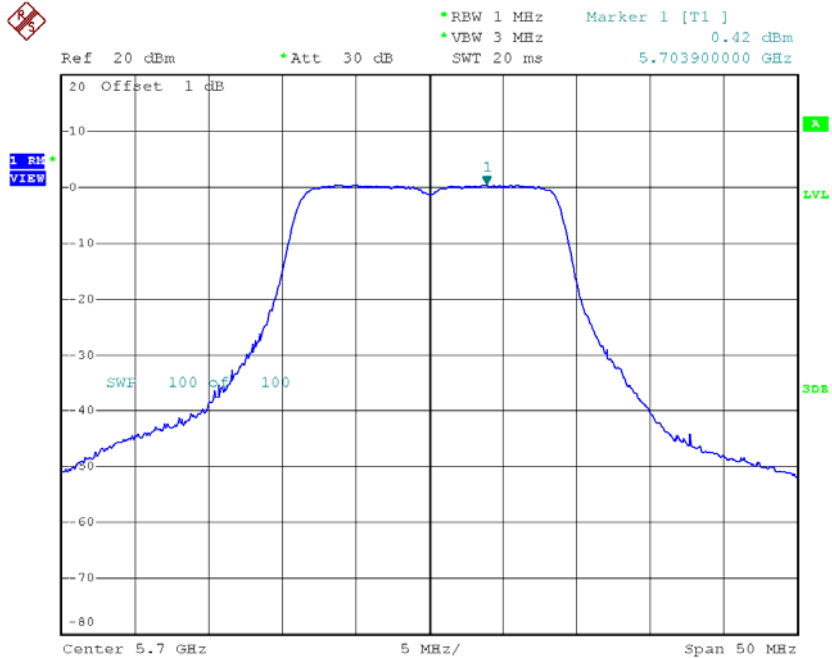


Date: 1.APR.2015 16:09:59

**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-2.20	0.19	-2.01	9.00
CH110	5550	-2.36	0.19	-2.17	9.00
CH134	5670	-4.17	0.19	-3.98	9.00

**CH102**

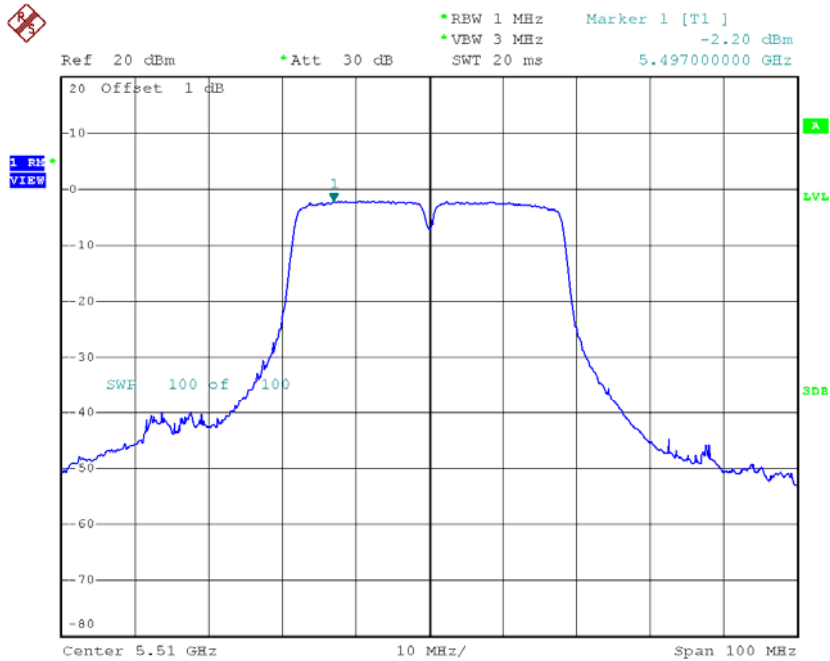


Date: 1.APR.2015 19:51:37

**CH110**

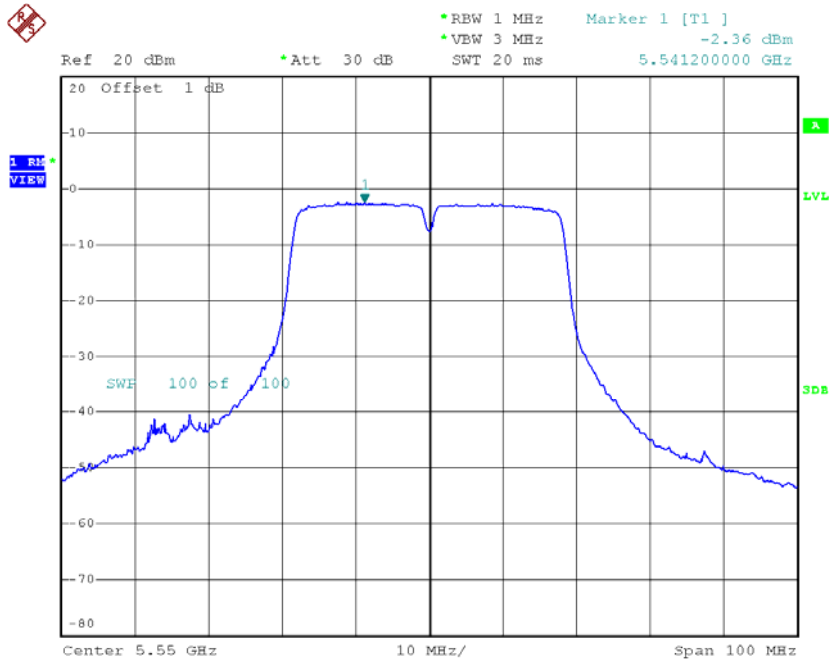

Date: 1.APR.2015 19:57:29

**CH134**

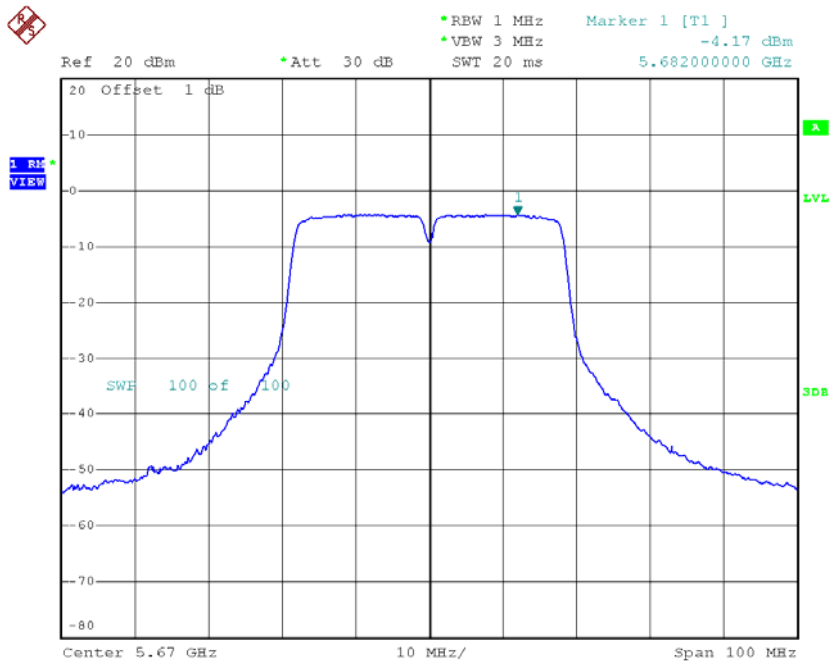


Date: 1.APR.2015 19:58:03

**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-6.34	0.48	-5.86	9.00
CH122	5610	-4.86	0.48	-4.38	9.00

**CH106**

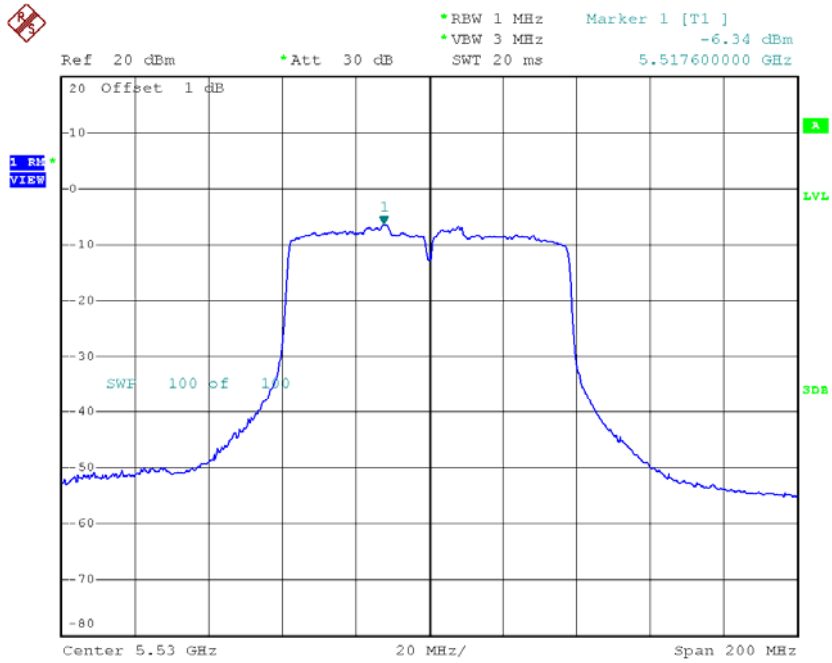

Date: 1.APR.2015 20:04:13


**CH122**

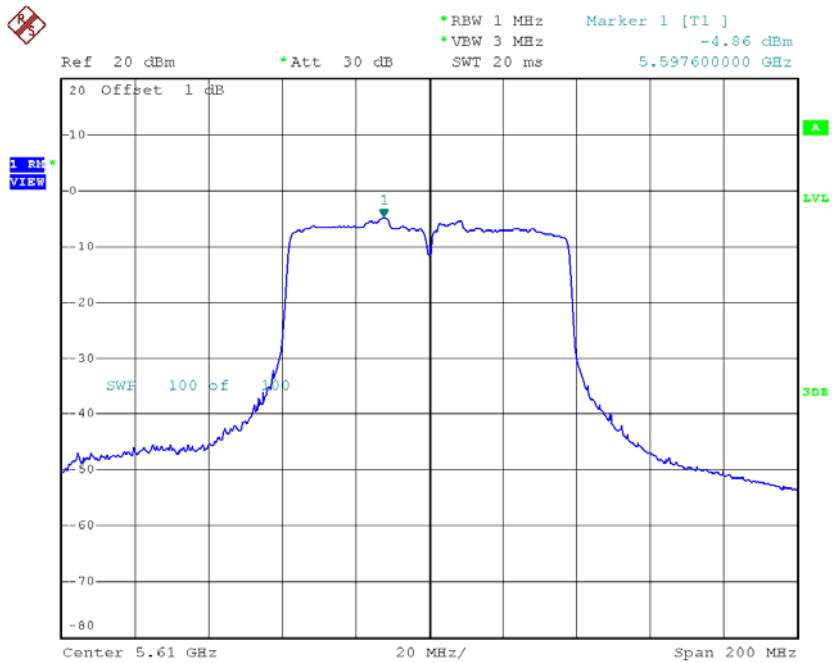

Date: 1.APR.2015 20:05:22




### TX CH157

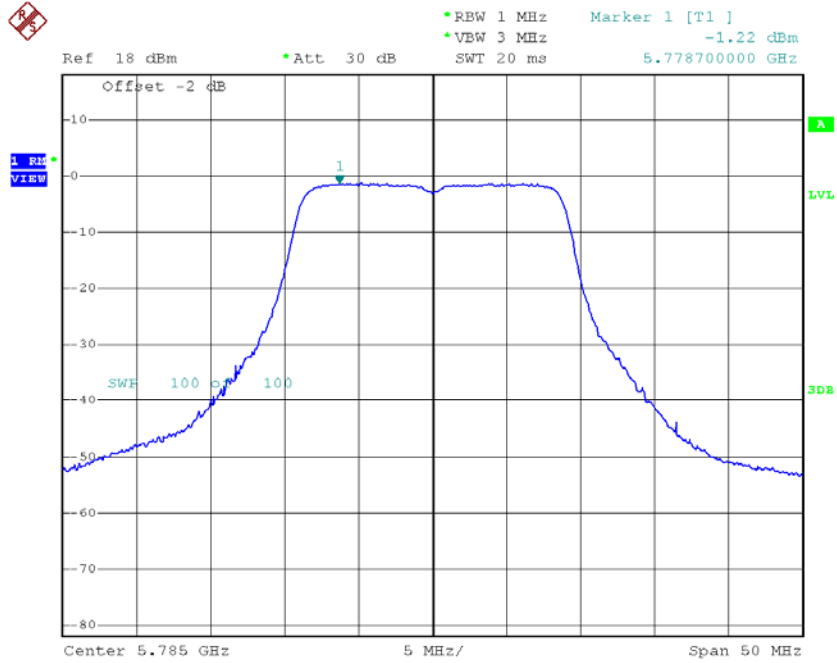

Date: 1.APR.2015 19:37:08

### TX CH165

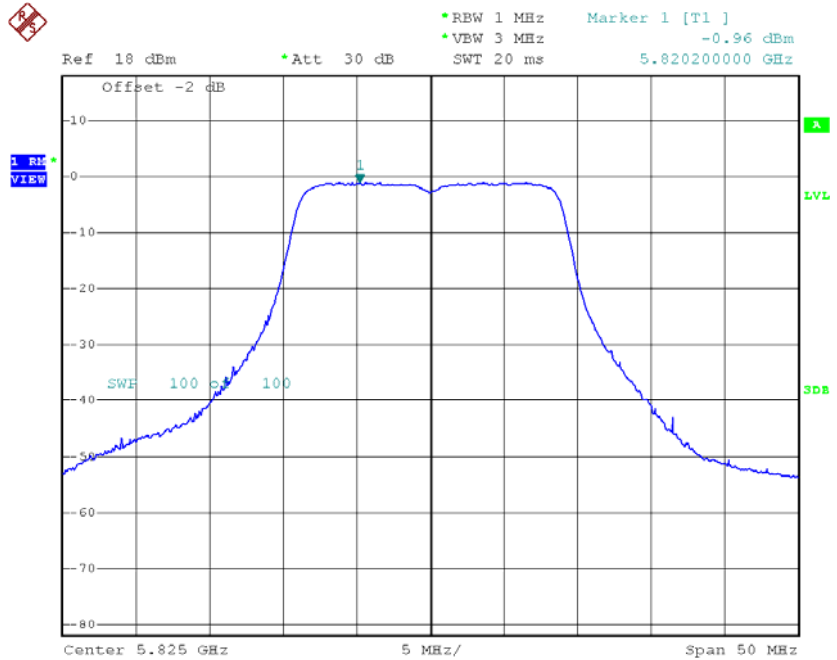


Date: 1.APR.2015 19:37:59

**Test Mode: UNII-3/ TX AC40 Mode\_CH151/CH159**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH151	5755	-5.18	0.19	-4.99	28.00
CH159	5795	-5.78	0.19	-5.59	28.00

### TX CH151

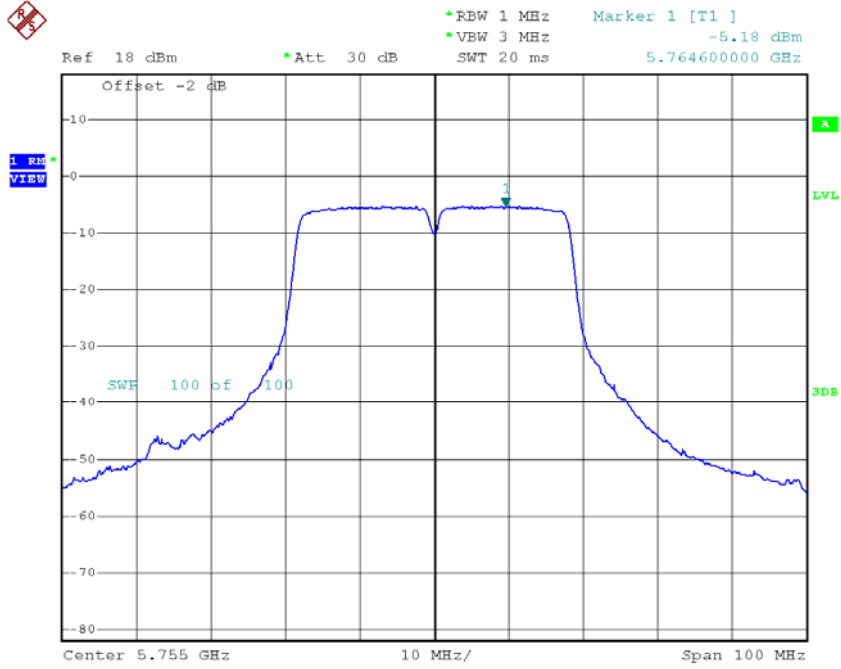

Date: 1.APR.2015 19:58:45

### TX CH159

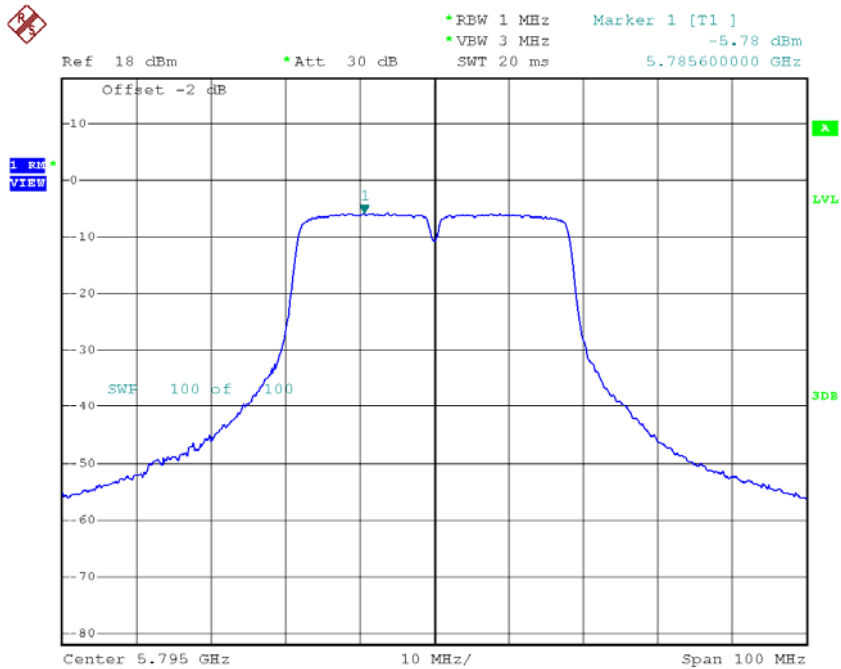


Date: 1.APR.2015 19:59:40



# For 2TX


**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_ANT 1**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.38	0.03	0.41	15.00
CH40	5200	0.69	0.03	0.72	15.00
CH48	5240	0.27	0.03	0.30	15.00

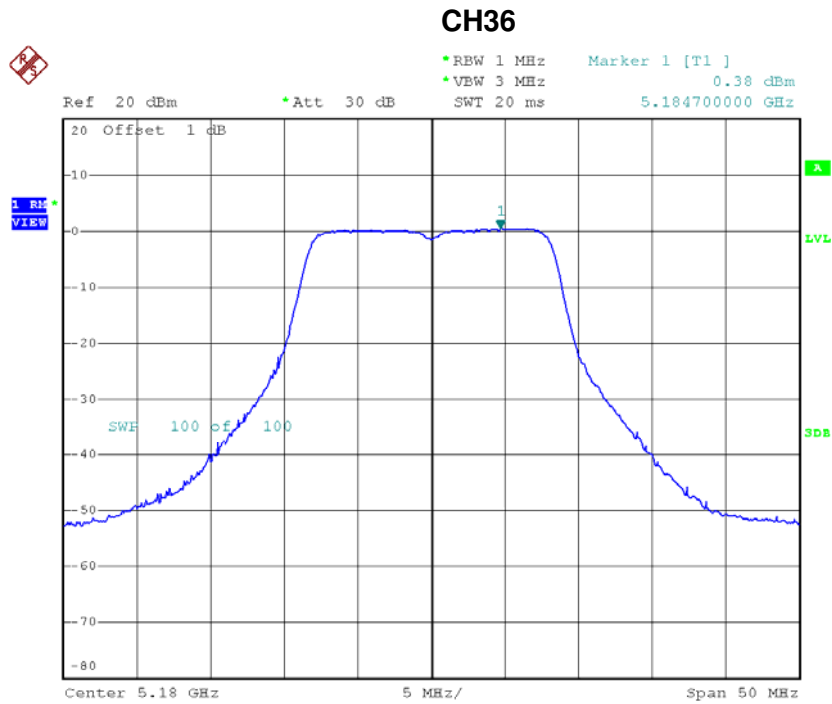


Date: 1.APR.2015 21:25:08

### CH40

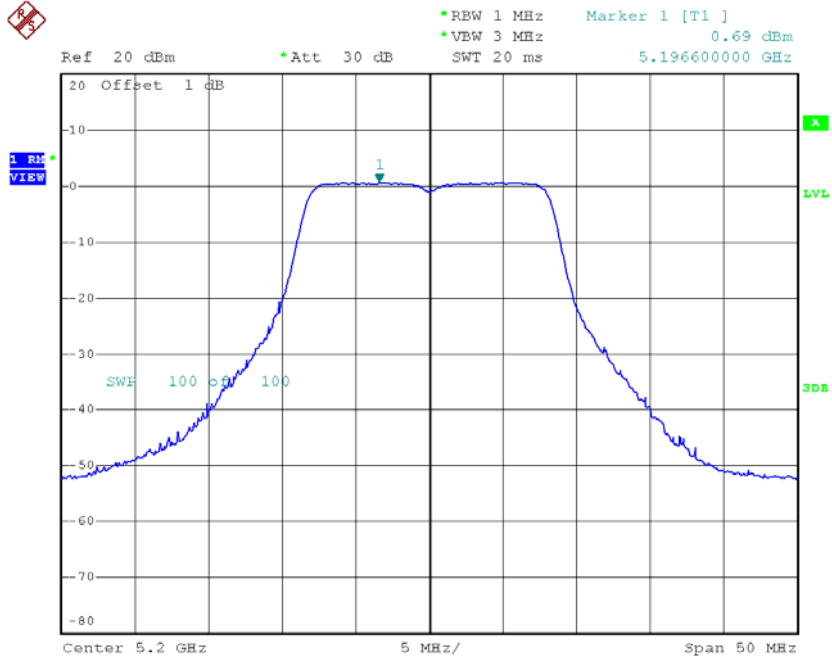

Date: 1.APR.2015 20:33:33


### CH48

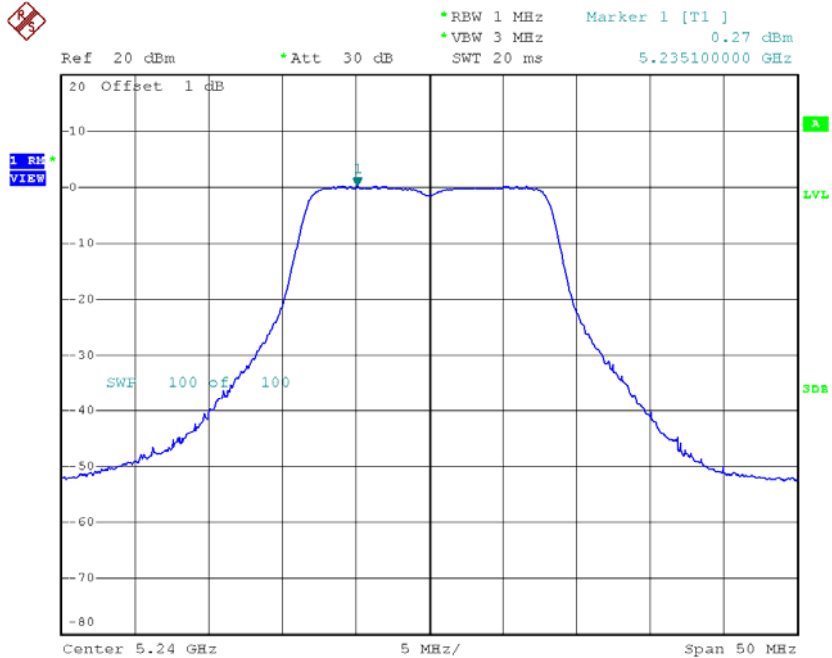

Date: 1.APR.2015 20:34:11




### CH40

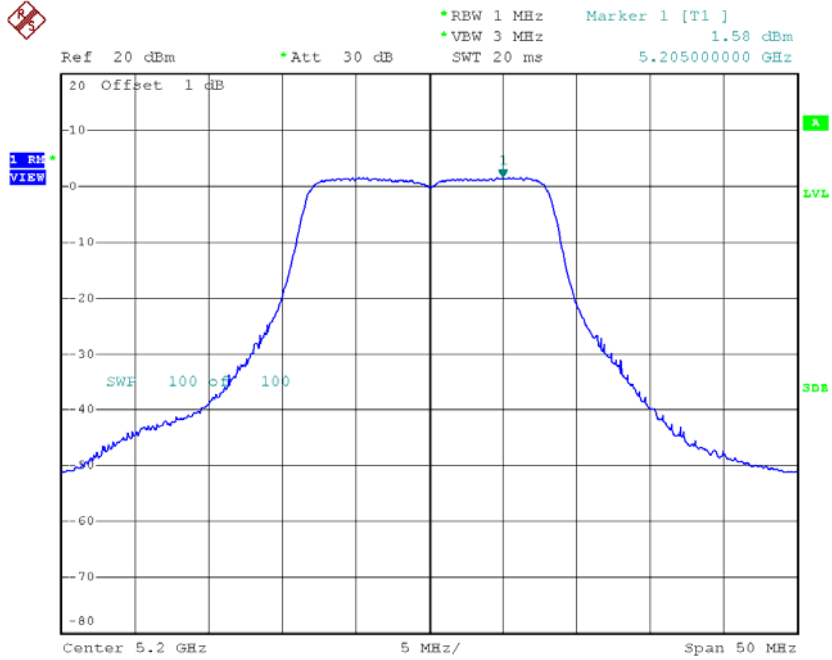

Date: 1.APR.2015 21:30:05

### CH48

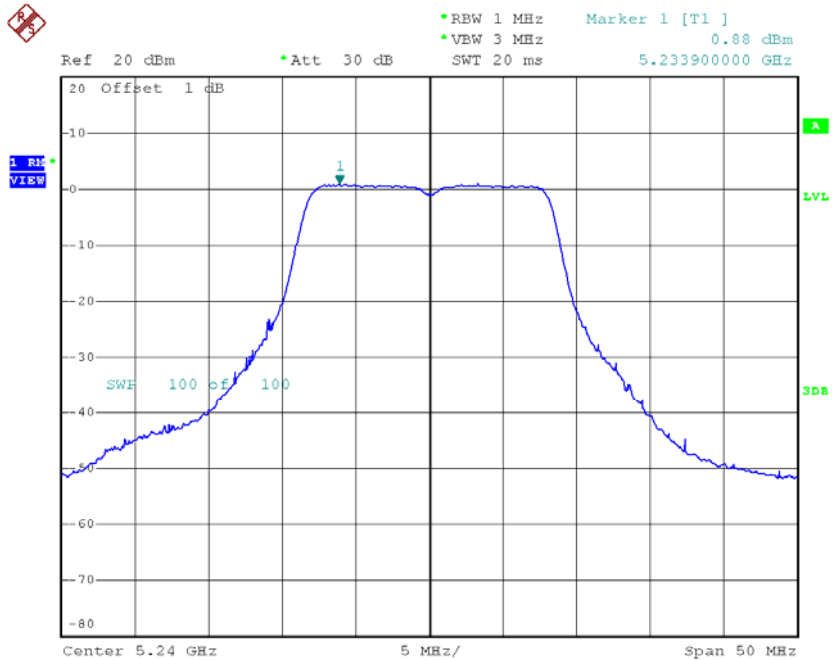


Date: 1.APR.2015 21:30:43

**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_Total**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.91	0.03	3.91	15.00
CH40	5200	4.20	0.03	4.20	15.00
CH48	5240	3.62	0.03	3.62	15.00


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 1**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.45	0.10	0.55	15.00
CH40	5200	0.59	0.10	0.69	15.00
CH48	5240	0.01	0.10	0.11	15.00

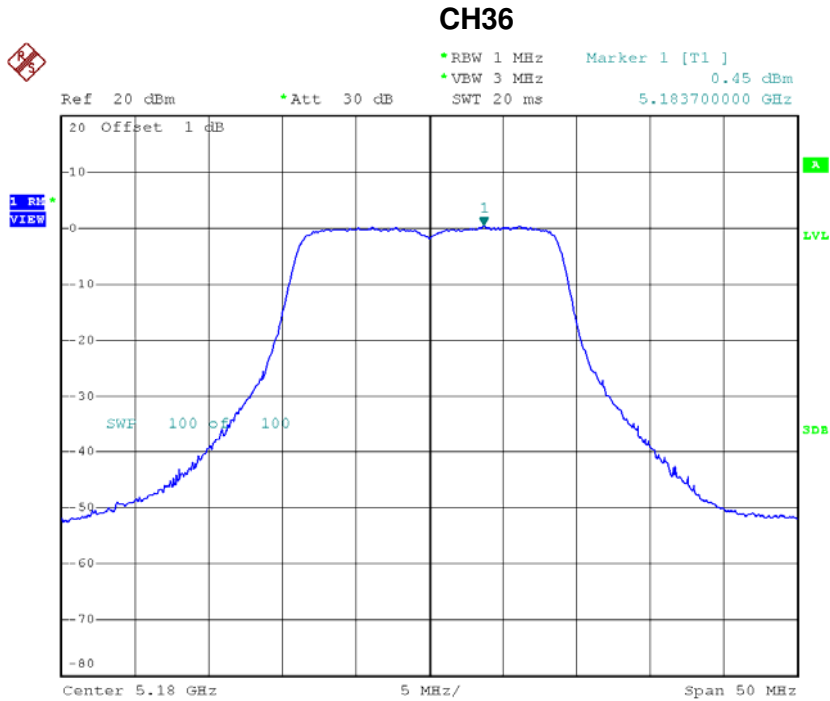


Date: 1.APR.2015 20:41:55

### CH40

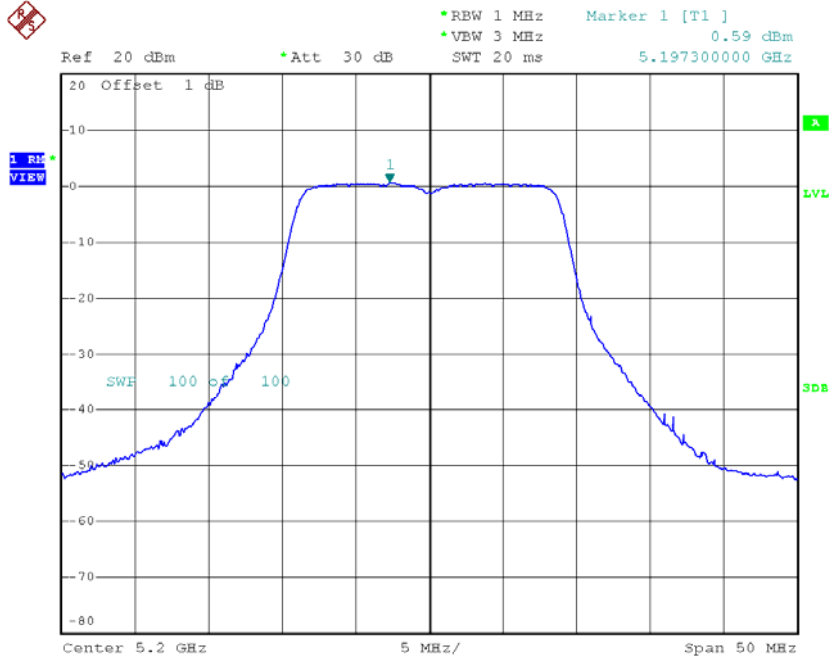

Date: 1.APR.2015 20:42:30

### CH48

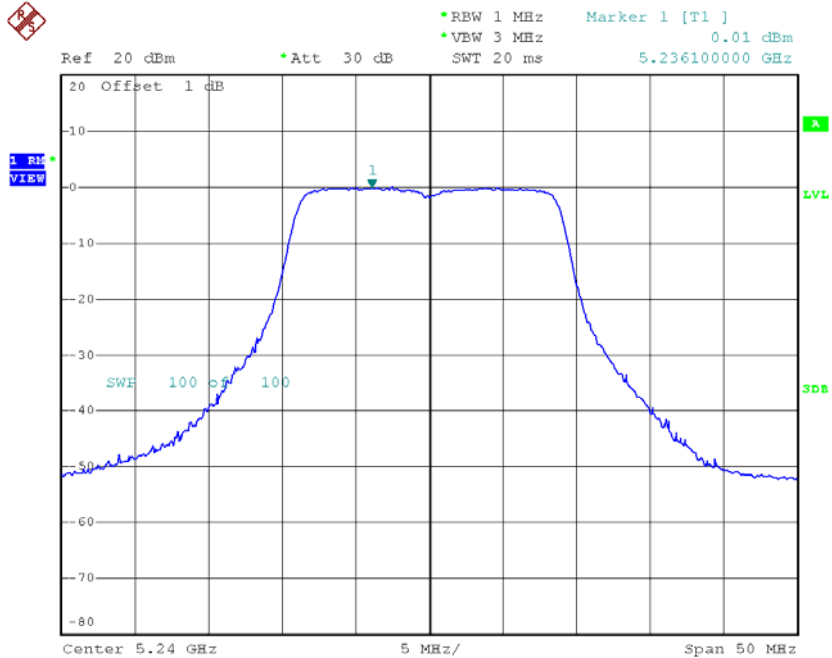


Date: 1.APR.2015 20:42:50

**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 2**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.15	0.10	1.25	15.00
CH40	5200	1.79	0.10	1.89	15.00
CH48	5240	0.82	0.10	0.92	15.00

**CH36**

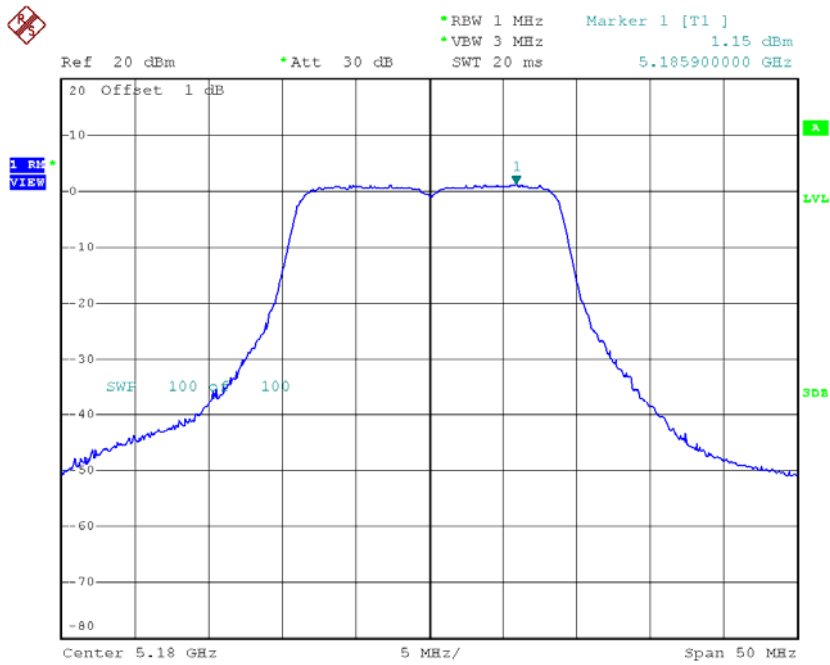


Date: 1.APR.2015 21:37:48

### CH40

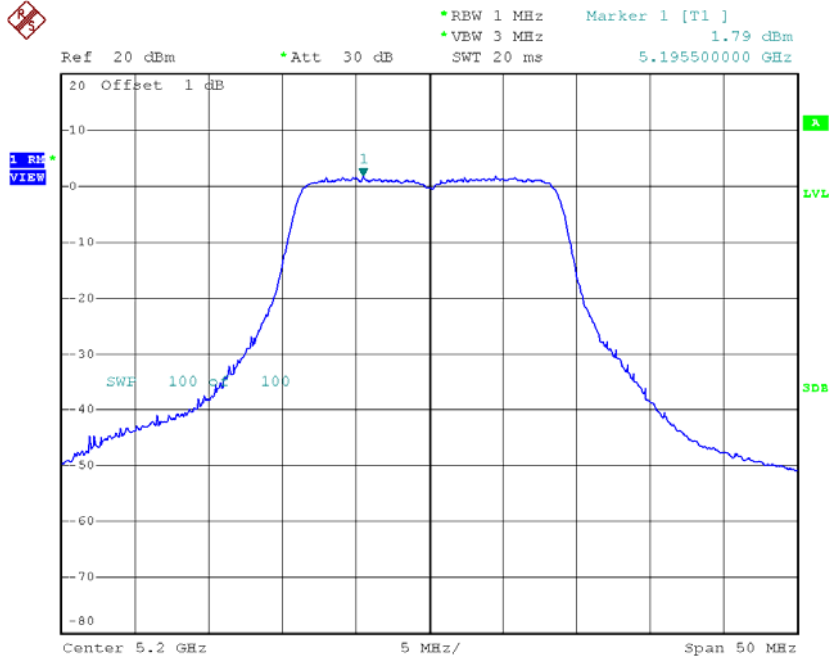

Date: 1.APR.2015 21:38:23

### CH48

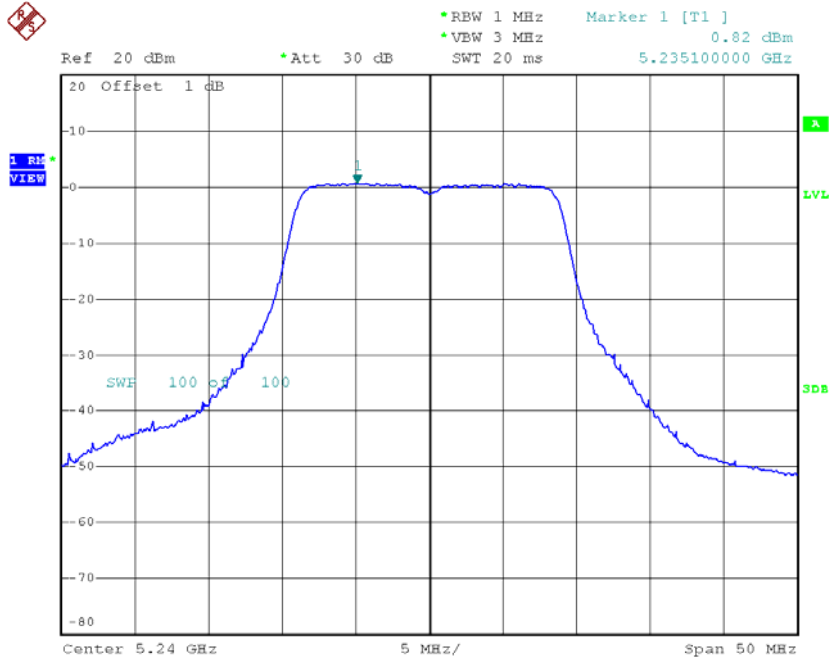

Date: 1.APR.2015 21:38:49


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_Total**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.93	0.10	3.93	15.00
CH40	5200	4.34	0.10	4.34	15.00
CH48	5240	3.54	0.10	3.54	15.00

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 1**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.48	0.13	-2.35	15.00
CH46	5230	-2.45	0.13	-2.32	15.00

### CH38

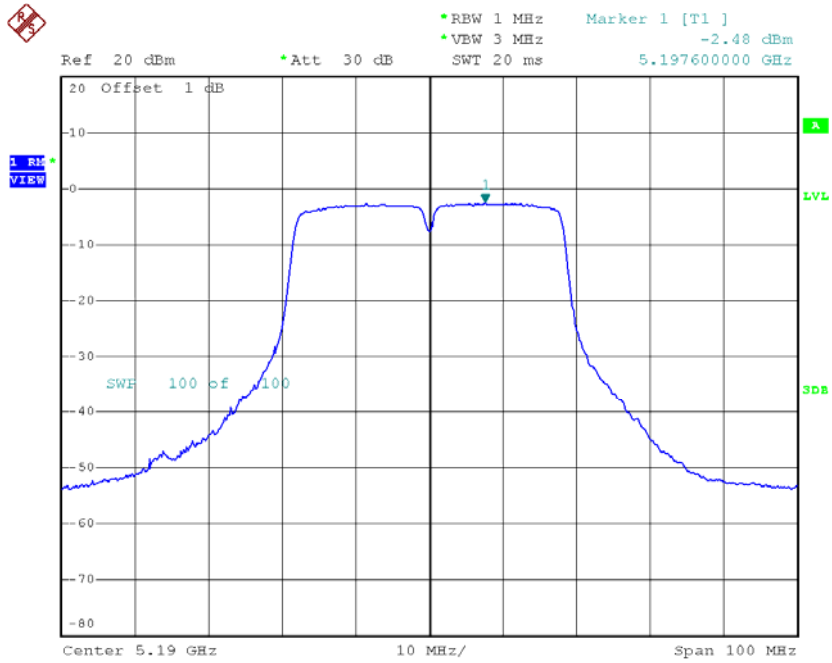

Date: 1.APR.2015 20:53:10

### CH46

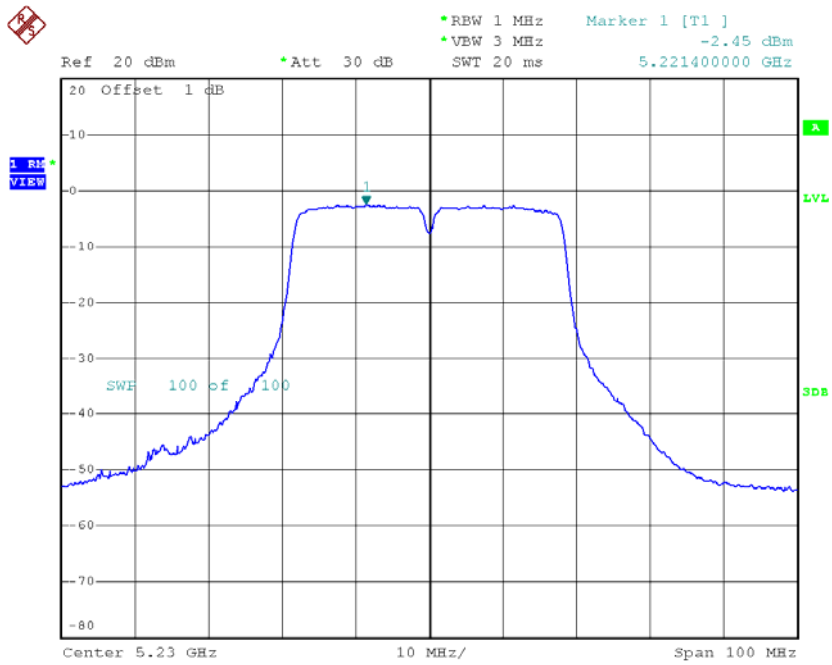


Date: 1.APR.2015 20:53:39

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 2**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-4.18	0.13	-4.05	15.00
CH46	5230	-2.27	0.13	-2.14	15.00

### CH38

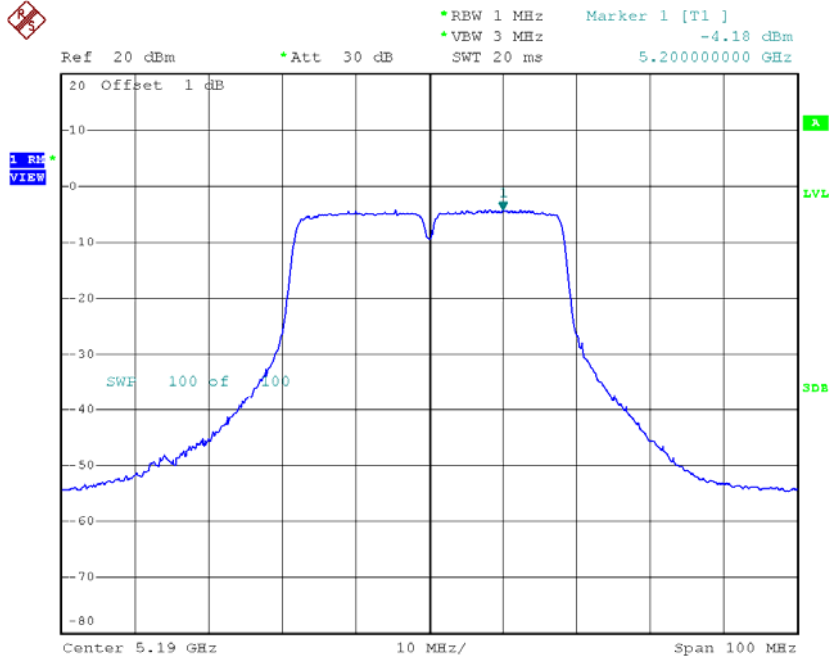

Date: 1.APR.2015 21:48:07

### CH46

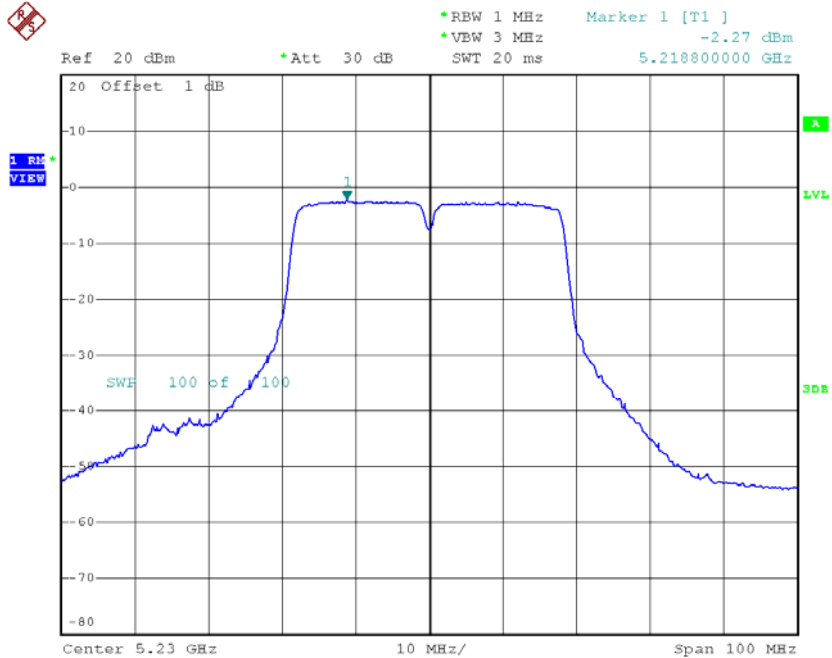


Date: 1.APR.2015 21:48:38

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_Total**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-0.10	0.13	-0.10	15.00
CH46	5230	0.78	0.13	0.78	15.00


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT 1**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.10	0.03	0.13	9.00
CH60	5300	0.16	0.03	0.19	9.00
CH64	5320	-0.14	0.03	-0.11	9.00

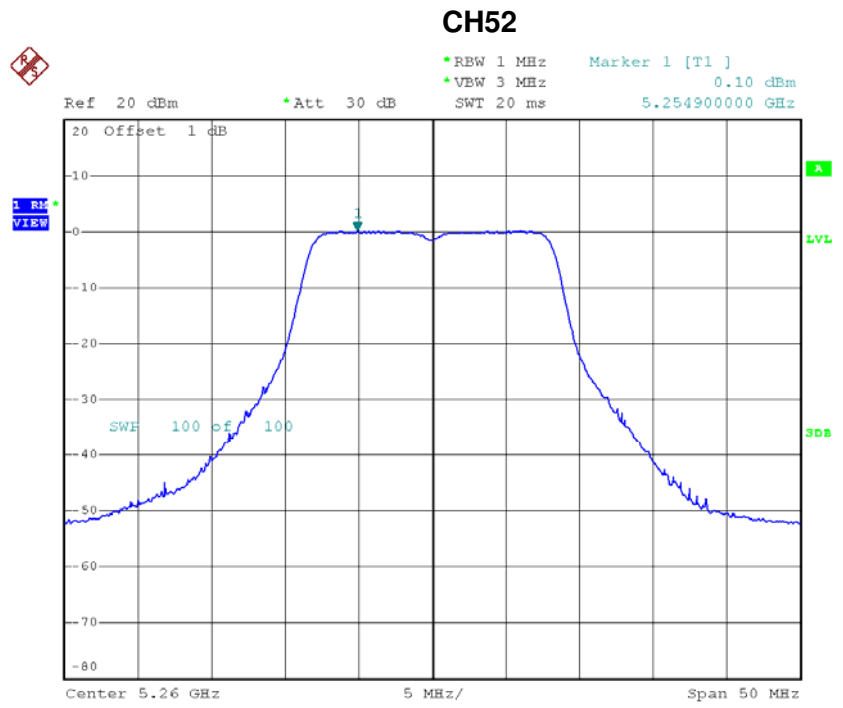


Date: 1.APR.2015 20:35:12

### CH60

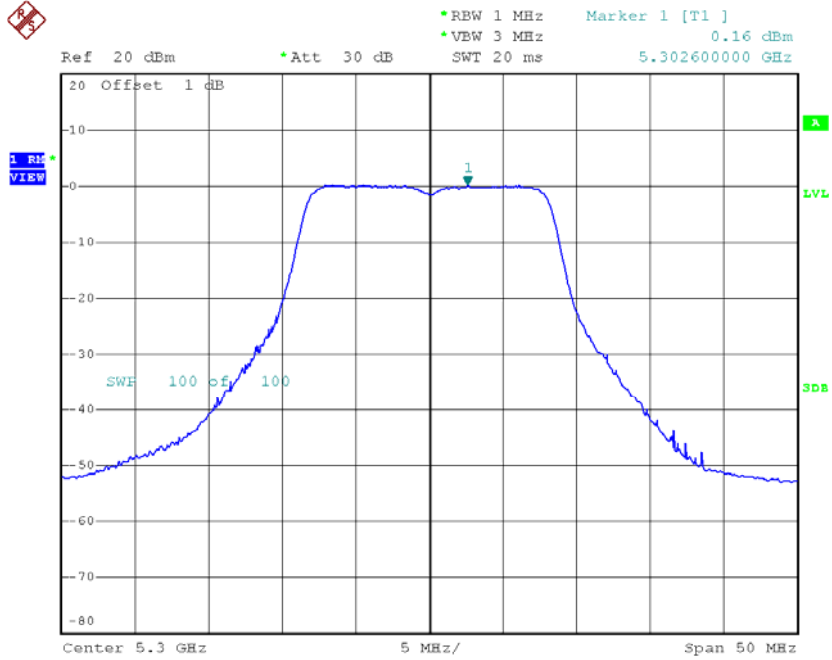

Date: 1.APR.2015 20:35:57


### CH64

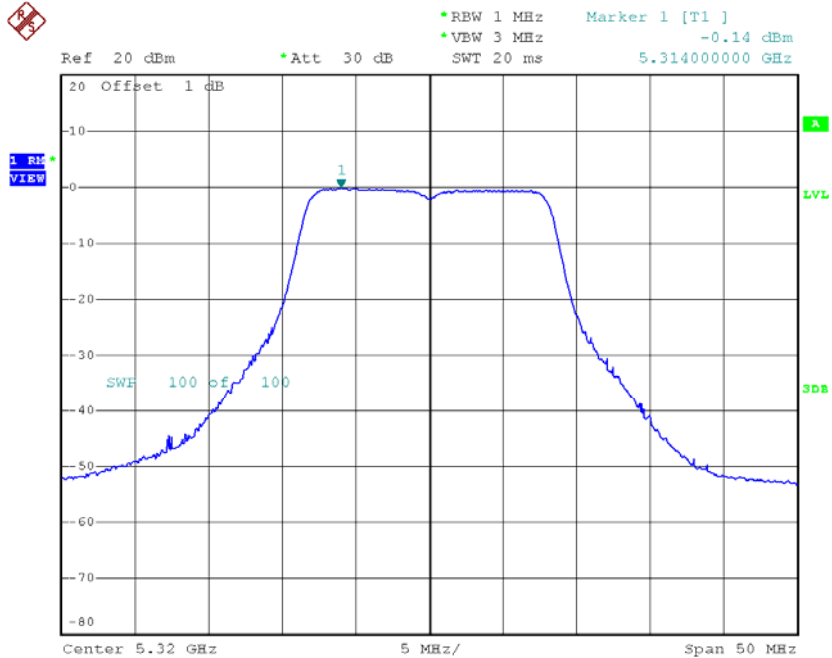

Date: 1.APR.2015 20:36:34


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT 2**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.82	0.03	0.85	9.00
CH60	5300	1.34	0.03	1.37	9.00
CH64	5320	1.54	0.03	1.57	9.00

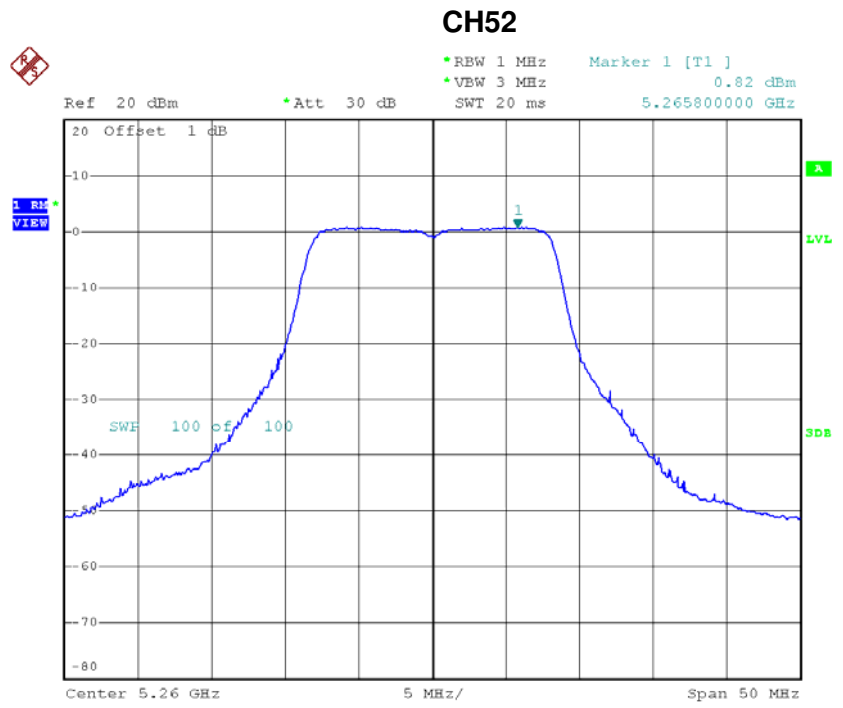


Date: 1.APR.2015 21:31:22

### CH60

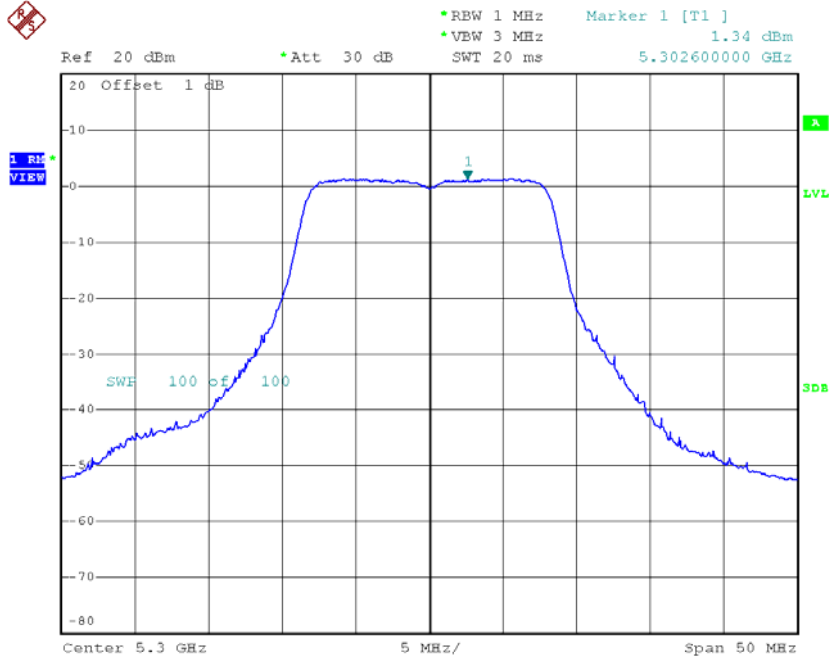

Date: 1.APR.2015 21:32:16

### CH64

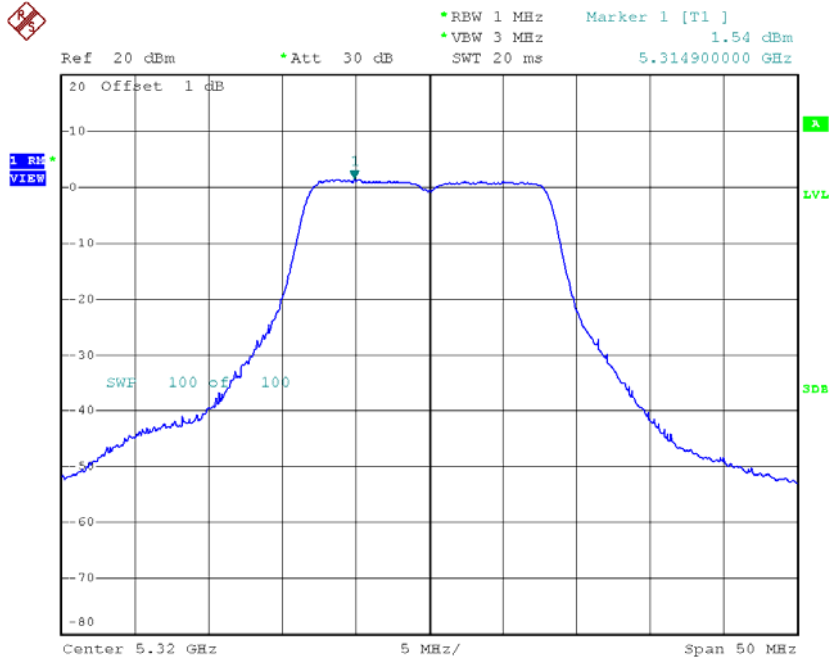


Date: 1.APR.2015 21:32:52

**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_Total**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	3.52	0.03	3.52	9.00
CH60	5300	3.83	0.03	3.83	9.00
CH64	5320	3.82	0.03	3.82	9.00


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 1**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.16	0.10	0.26	9.00
CH60	5300	0.06	0.10	0.16	9.00
CH64	5320	-0.32	0.10	-0.22	9.00

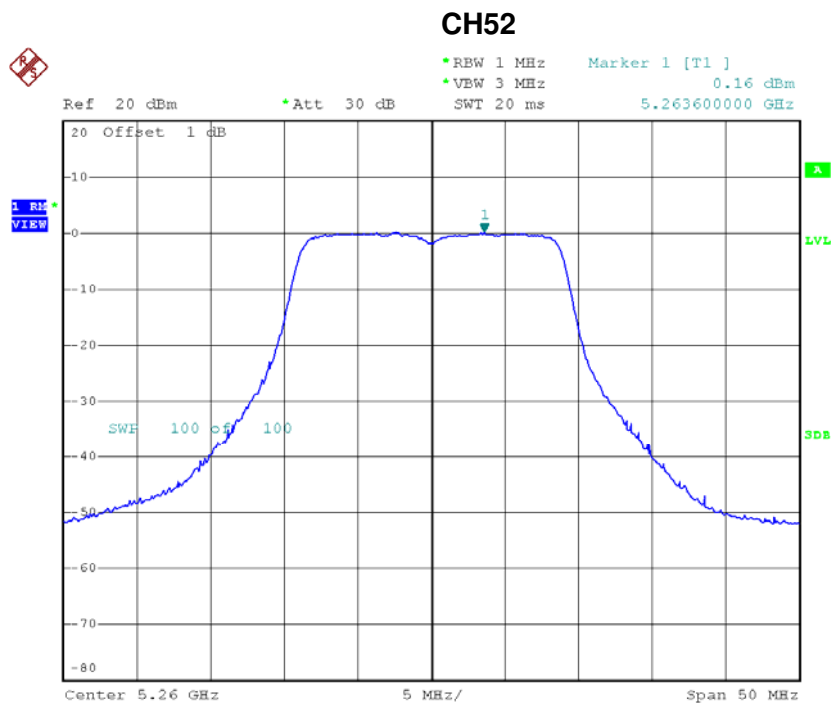


Date: 1.APR.2015 20:43:16

### CH60

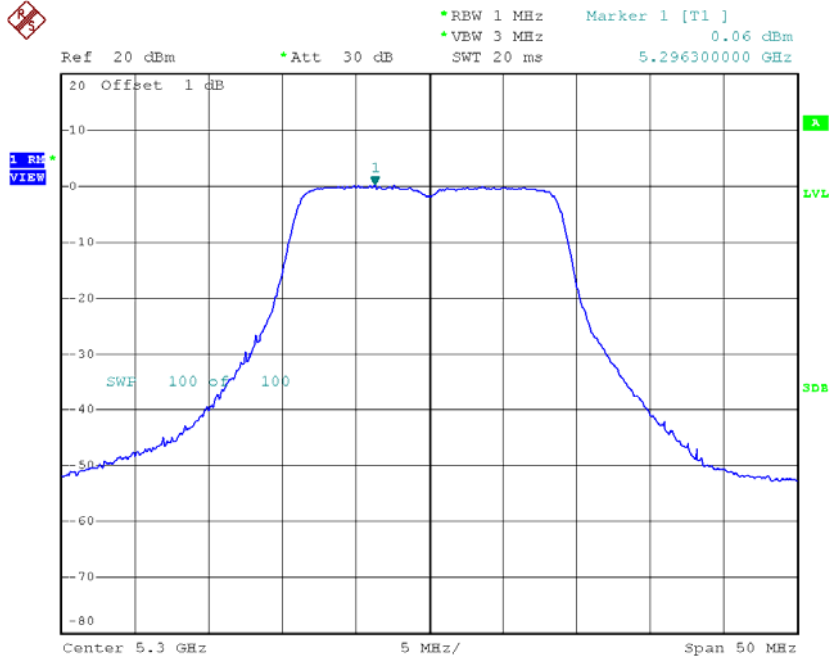

Date: 1.APR.2015 20:43:53


### CH64

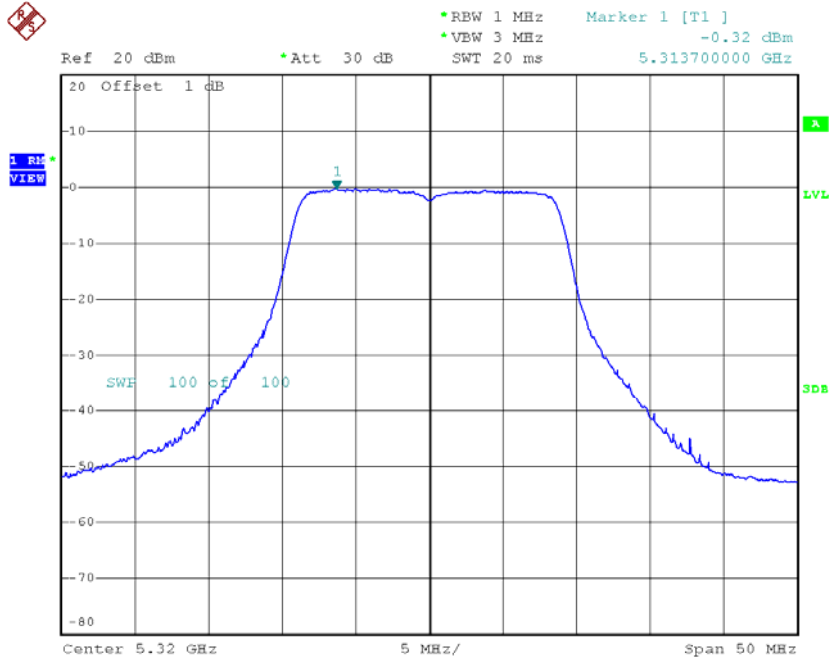

Date: 1.APR.2015 20:44:12


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 2**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.51	0.10	0.61	9.00
CH60	5300	1.55	0.10	1.65	9.00
CH64	5320	1.36	0.10	1.46	9.00

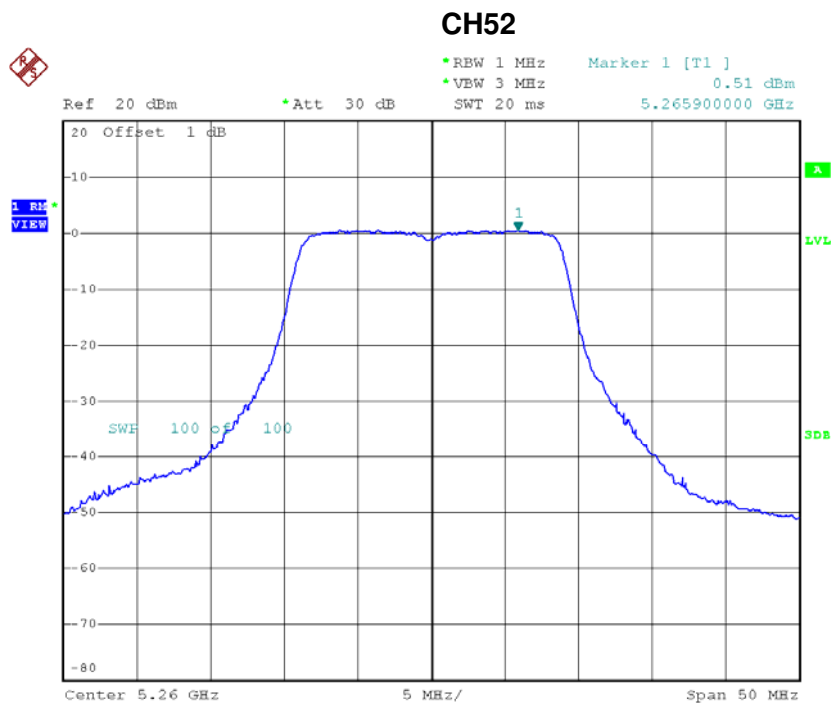


Date: 1.APR.2015 21:39:13

### CH60

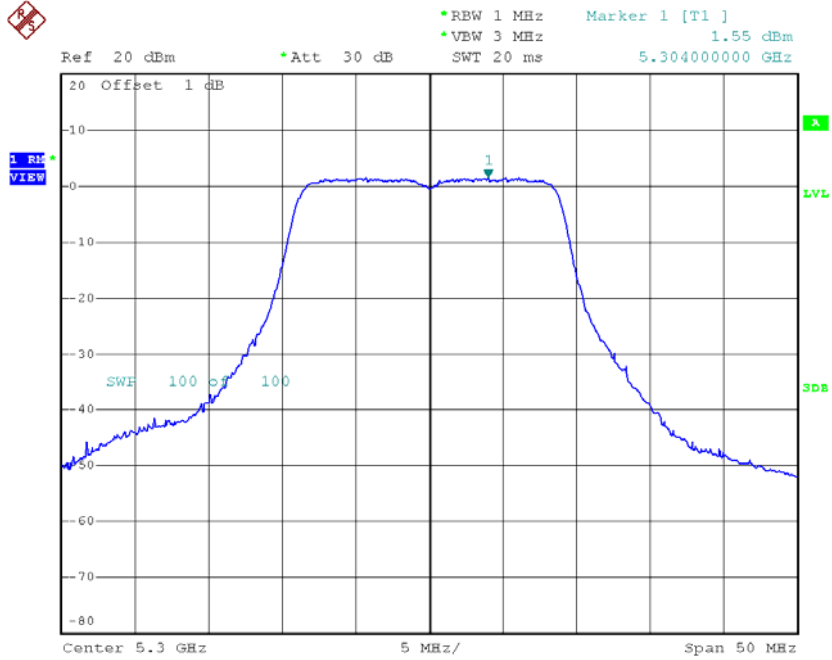

Date: 1.APR.2015 21:39:39

### CH64

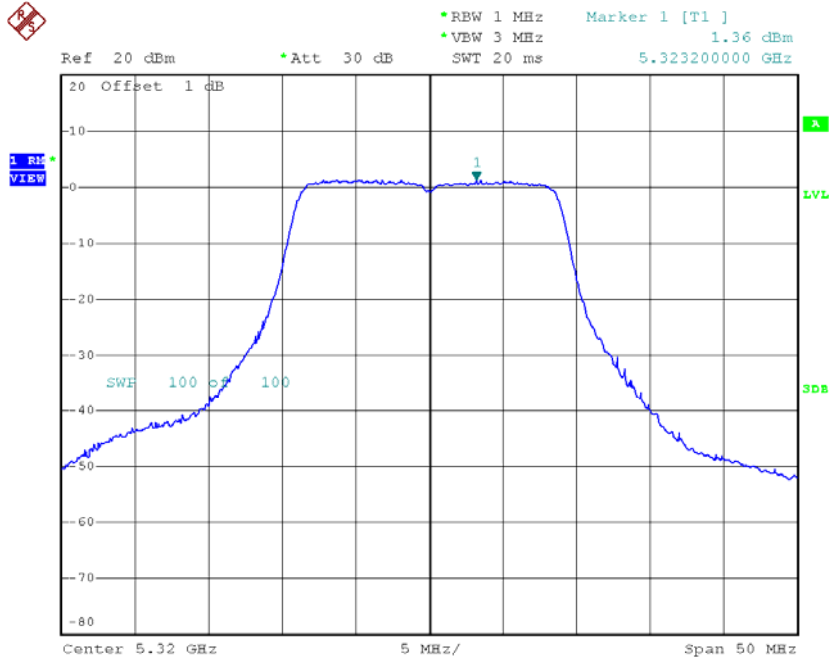

Date: 1.APR.2015 21:39:57


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_Total**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	3.45	0.10	3.45	9.00
CH60	5300	3.98	0.10	3.98	9.00
CH64	5320	3.71	0.10	3.71	9.00

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_ANT 1**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-2.80	0.13	-2.67	9.00
CH62	5310	-2.72	0.13	-2.59	9.00

### CH54

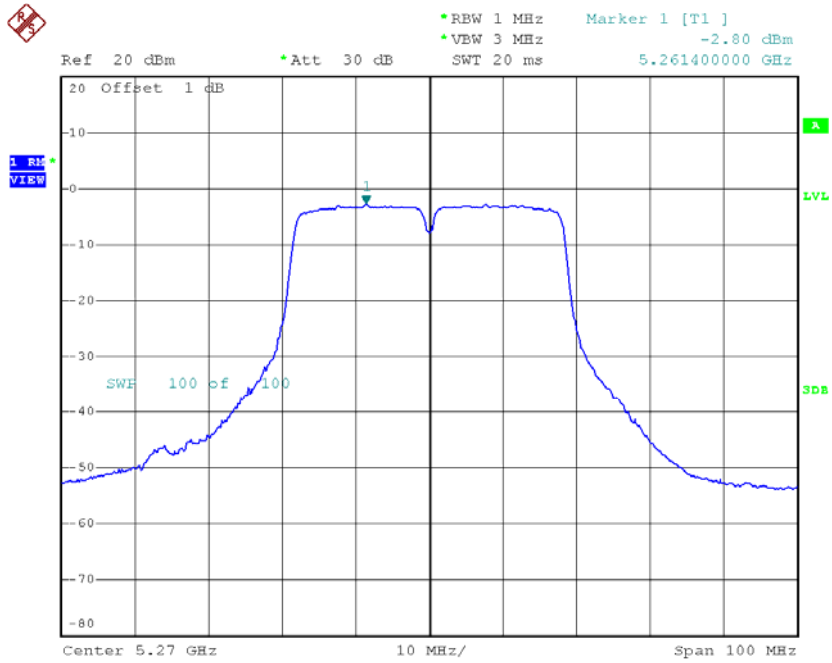

Date: 1.APR.2015 20:54:07

### CH62

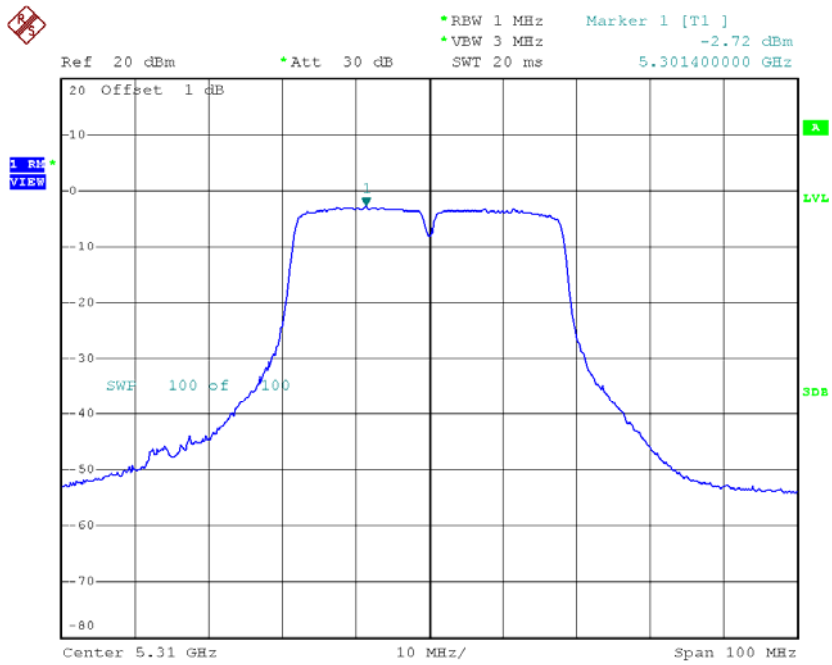


Date: 1.APR.2015 20:54:34

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_ANT 2**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-4.76	0.13	-4.63	9.00
CH62	5310	-4.57	0.13	-4.44	9.00

### CH54

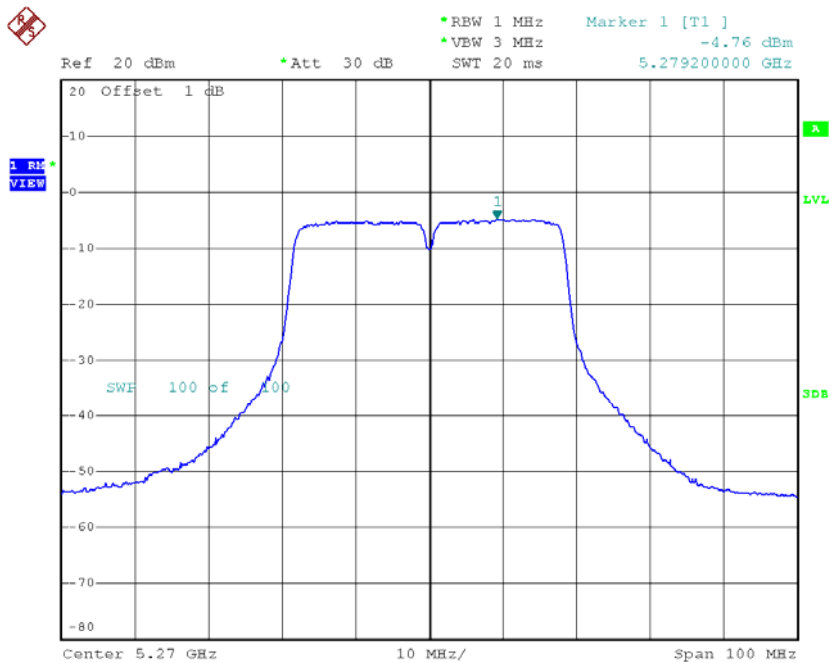

Date: 1.APR.2015 21:49:03

### CH62

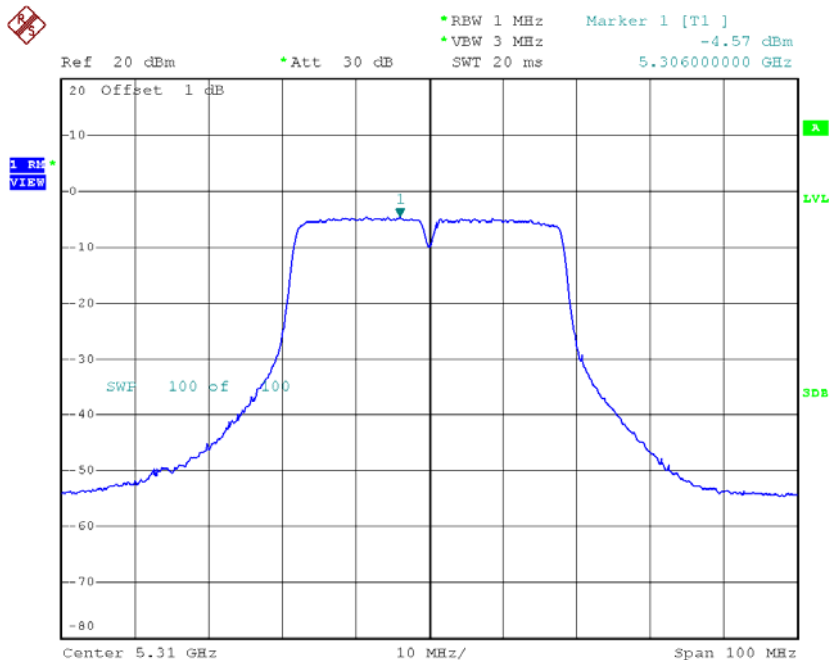


Date: 1.APR.2015 21:49:31

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_Total**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-0.53	0.13	-0.53	9.00
CH62	5310	-0.41	0.13	-0.41	9.00


**Test Mode: UNII-2C/ TX A Mode\_CH100/CH116/CH140\_ANT 1**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	0.19	0.03	0.22	9.00
CH116	5580	-0.65	0.03	-0.62	9.00
CH140	5700	-0.07	0.03	-0.04	9.00

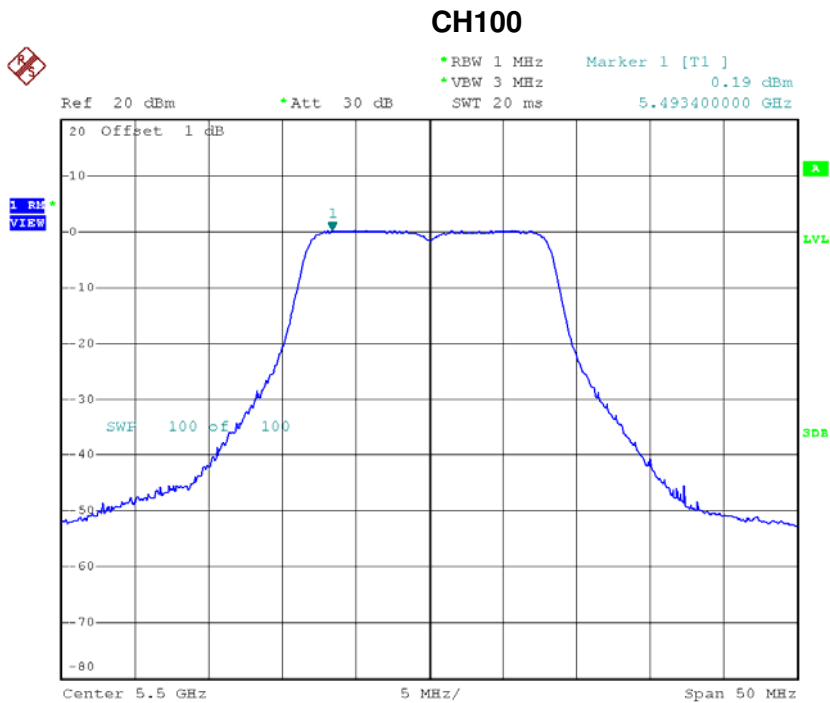


Date: 1.APR.2015 20:37:14

### CH116

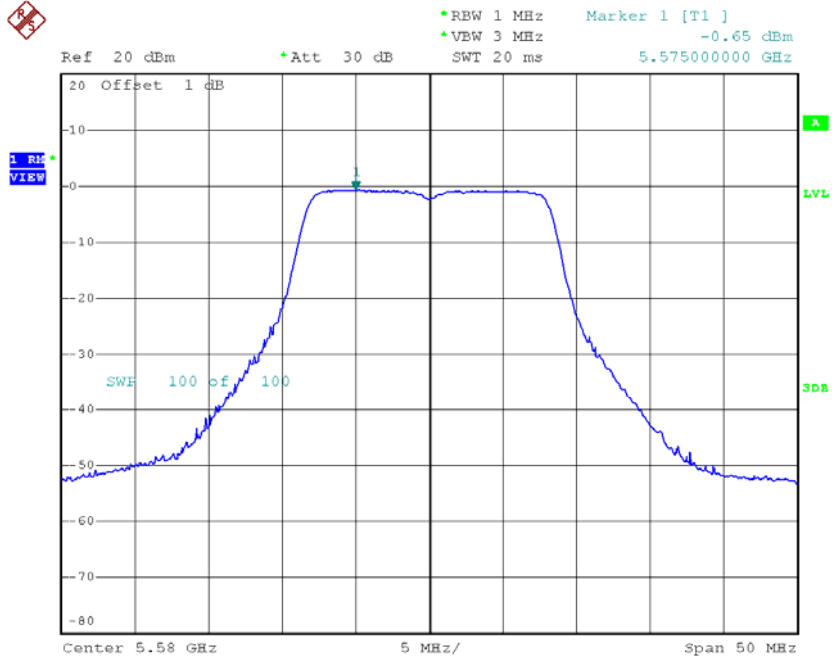

Date: 1.APR.2015 20:38:00

### CH140

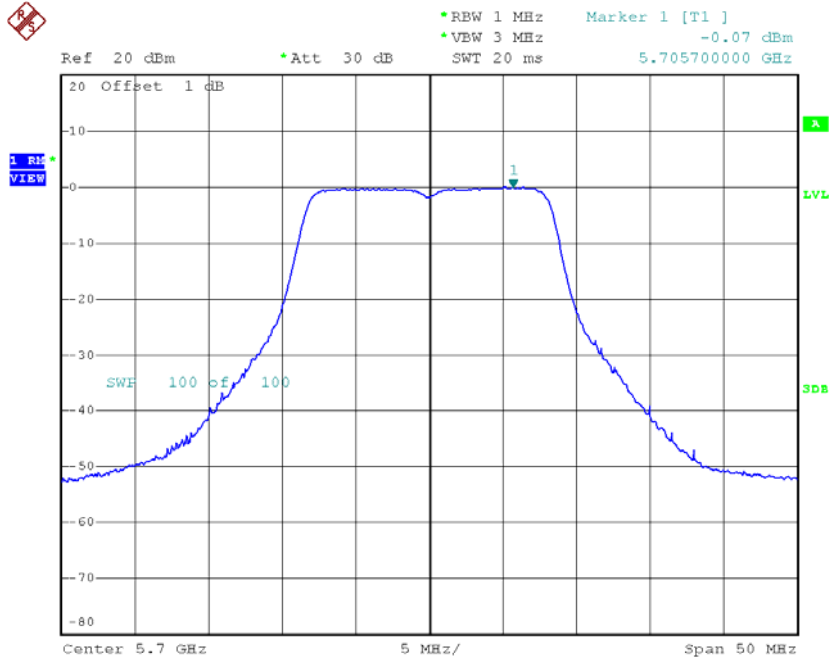

Date: 1.APR.2015 20:38:35