

FCC Radio Test Report

FCC ID: QISB525S-65A

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1701C181A
Equipment : LTE CPE
Model Name : B525s-65a
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen, 518129, P.R.C

Date of Receipt : Feb. 21, 2017
Date of Test : Feb. 21, 2017 ~ Mar. 02, 2017
Issued Date : Mar. 03, 2017
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS	18
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
ATTACHMENT A - CONDUCTED EMISSION	20
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	25
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	34
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	43

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1701C181A	Original Issue.	Mar. 03, 2017

1. CERTIFICATION

Equipment : LTE CPE
Brand Name : HUAWEI
Model Name : B525s-65a
Applicant : Huawei Technologies Co. ,Ltd.
Manufacturer : Huawei Technologies Co. ,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen,518129, P.R.C
Factory : Shenzhen Zowee Technology.co.,ltd
Address : Shenzhen songgang town pond under chung industrial avenue with rich
industrial area
Date of Test : Feb. 21, 2017 ~ Mar. 02, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1701C181A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
	15.207	Conducted Emission	PASS	
	15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	LTE CPE	
Brand Name	HUAWEI	
Model Name	B525s-65a	
Model Difference	N/A	
Product Description	Operation Frequency	2432~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
Power Source	DC Voltage supplied from AC/DC adapter. #1 Manufacturer / Model: Fu Hua / HW-120200U01(US) #2 Manufacturer / Model: Ou Lu Tong / HW-120200U01(US)	
Power Rating	DC12V 2A	
HW Version	WL1B525I	
SW Version	11.232.08.DM.00	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH05 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
05	2432	08	2447	11	2462
06	2437	09	2452		
07	2442	10	2457		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	1
2	N/A	N/A	Internal	N/A	1

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides three completed two transmitters and two receivers (2T2R).

4.

Operating Mode TX Mode	1TX	2TX
802.11b	V (ANT 1)	-
802.11g	V (ANT 1)	-
802.11n(20MHz)	-	V (ANT 1+ANT 2)
802.11n(40MHz)	-	V (ANT 1+ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 05/08/11
Mode 2	TX G MODE CHANNEL 05/08/11
Mode 3	TX N-20MHZ MODE CHANNEL 05/08/11
Mode 4	TX N-40MHZ MODE CHANNEL 07/08/09
Mode 5	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


For Conducted Test	
Final Test Mode	Description
Mode 5	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 05/08/11
Mode 2	TX G MODE CHANNEL 05/08/11
Mode 3	TX N-20MHZ MODE CHANNEL 05/08/11
Mode 4	TX N-40MHZ MODE CHANNEL 07/08/09

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
 802.11g mode: OFDM (6Mbps)
 802.11n HT20 mode : BPSK (13Mbps)
 802.11n HT40 mode : BPSK (27Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

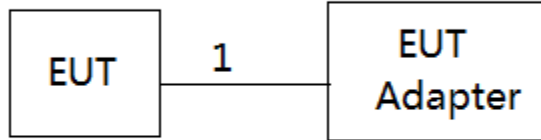

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	AC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

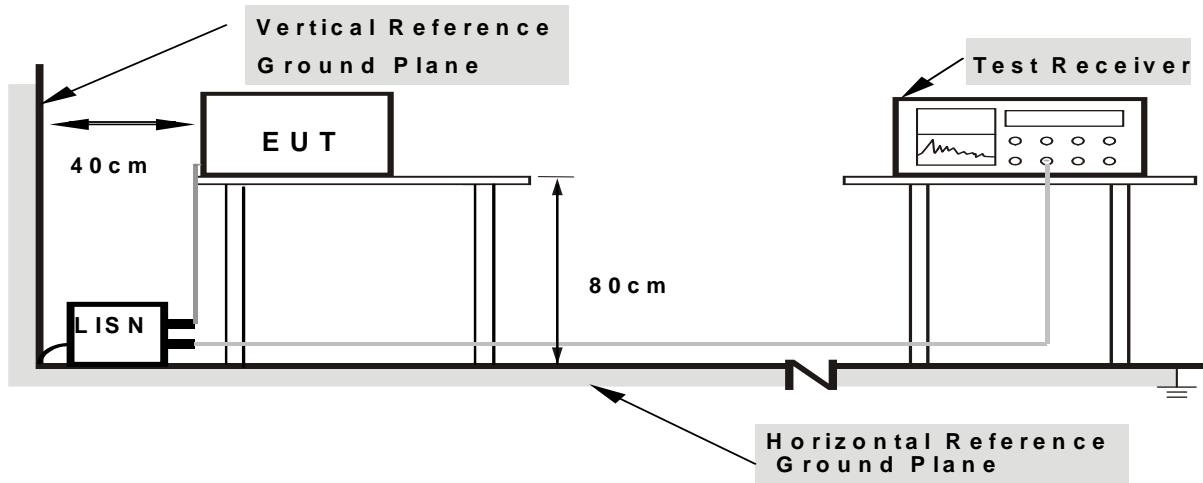

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

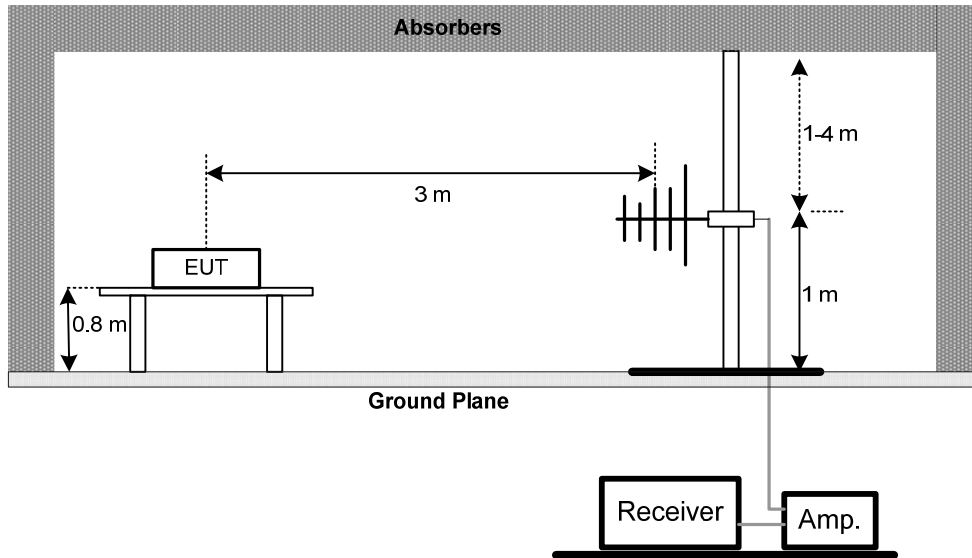


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz
Band edge

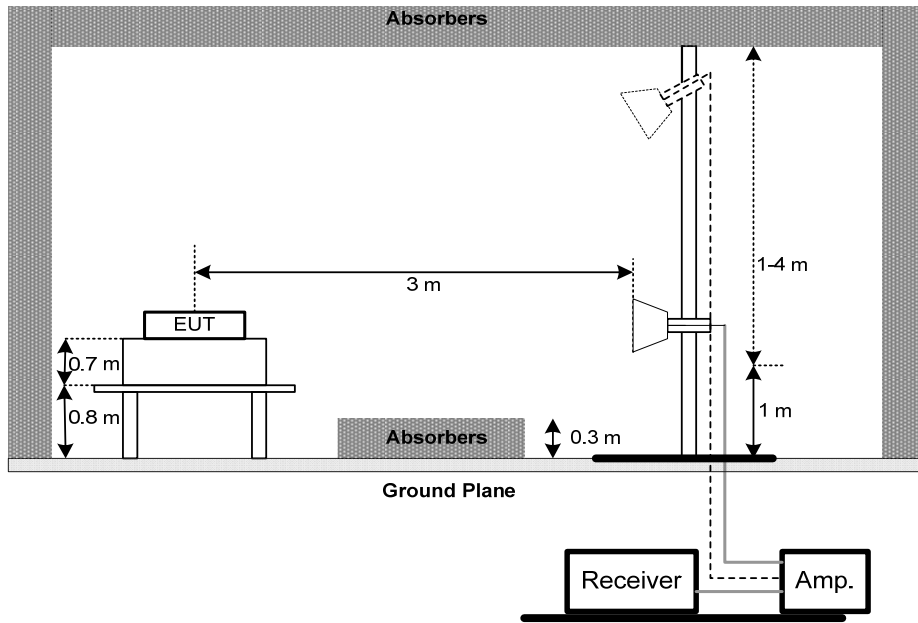

Harmonic

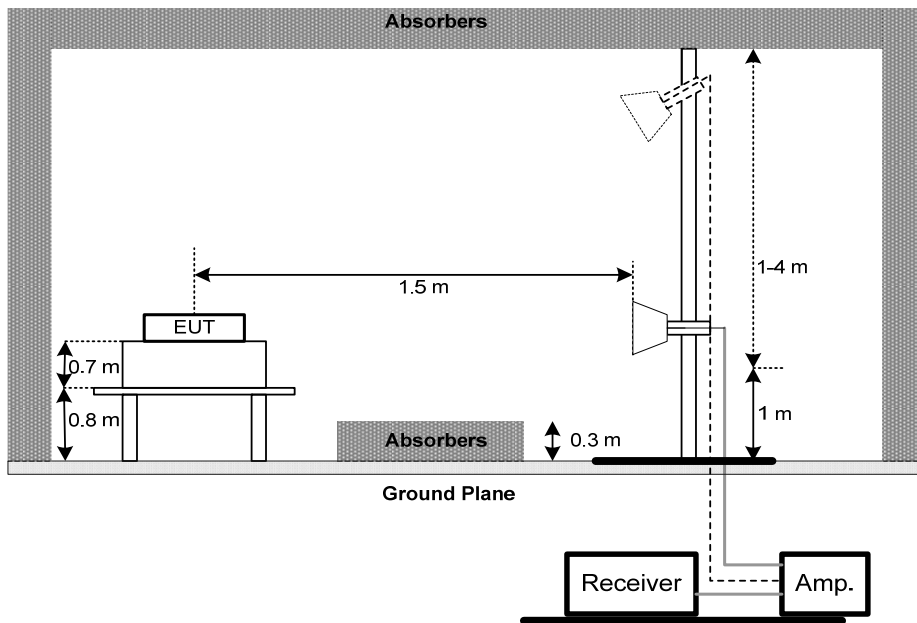

(C) For Radiated Emissions Below 30MHz

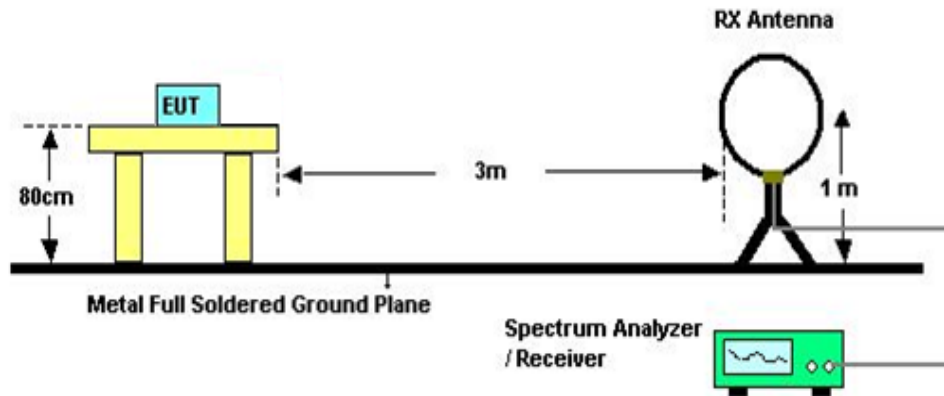

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
2	LISN	EMCO	3816/2	52765	Mar. 27, 2017
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 27, 2017
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 27, 2017
5	Cable	emci	RG223(9KHz-30MHz)(5m)	N/A	Mar. 10, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	Agilent	N9038A	MY52130039	Sep. 04, 2017
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 27, 2017
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2017
9	Receiver	Agilent	N9038A	MY52130039	Sep. 04, 2017
10	Cable	emci	EMC104-SM-SM-12000(12m)	N/A	Jul. 06, 2017
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
13	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX Mode_Adapter:Fu Hua


Line

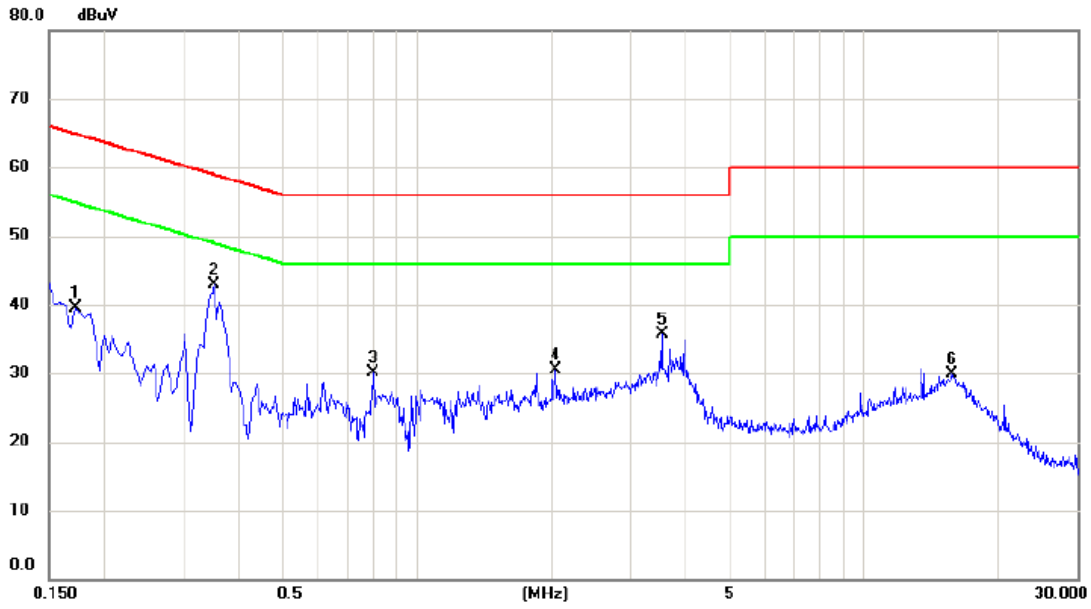

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1725	29.84	9.57	39.41	64.84	-25.43	peak	
2	*	0.3525	33.39	9.58	42.97	58.90	-15.93	peak	
3		0.7980	20.32	9.82	30.14	56.00	-25.86	peak	
4		2.0400	20.45	10.03	30.48	56.00	-25.52	peak	
5		3.5430	25.29	10.33	35.62	56.00	-20.38	peak	
6		15.6705	19.17	10.71	29.88	60.00	-30.12	peak	

Test Mode : TX Mode_Adapter:Fu Hua


Neutral

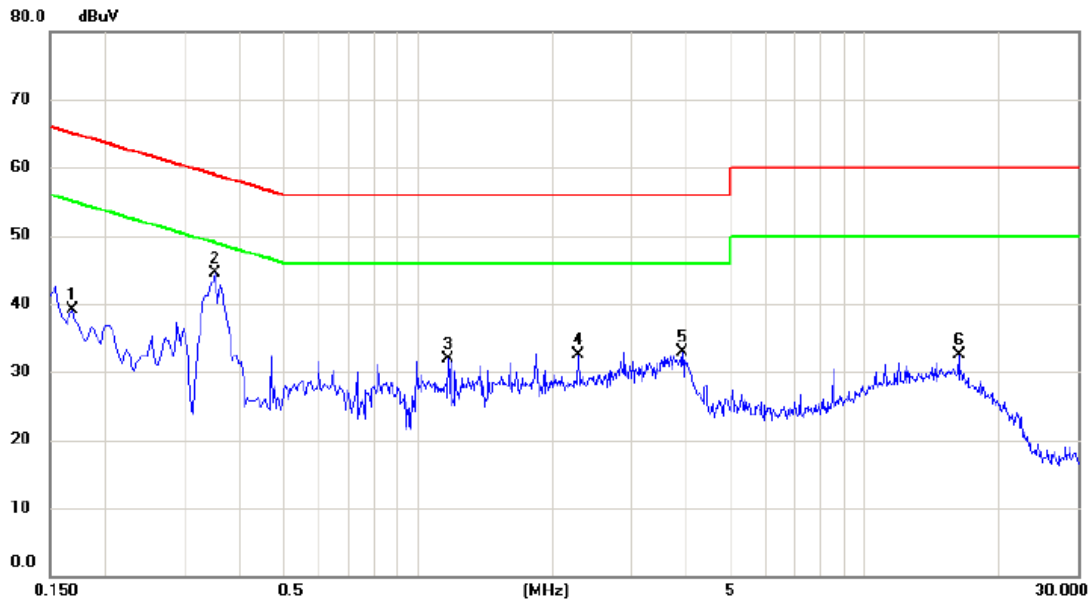

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	29.57	9.48	39.05	65.06	-26.01	peak	
2	*	0.3524	34.83	9.58	44.41	58.91	-14.50	peak	
3		1.1670	22.20	9.75	31.95	56.00	-24.05	peak	
4		2.2874	22.61	9.88	32.49	56.00	-23.51	peak	
5		3.9165	22.82	10.08	32.90	56.00	-23.10	peak	
6		16.2780	21.65	10.76	32.41	60.00	-27.59	peak	

Test Mode : TX Mode_Adapter:Ou Lu Tong


Line

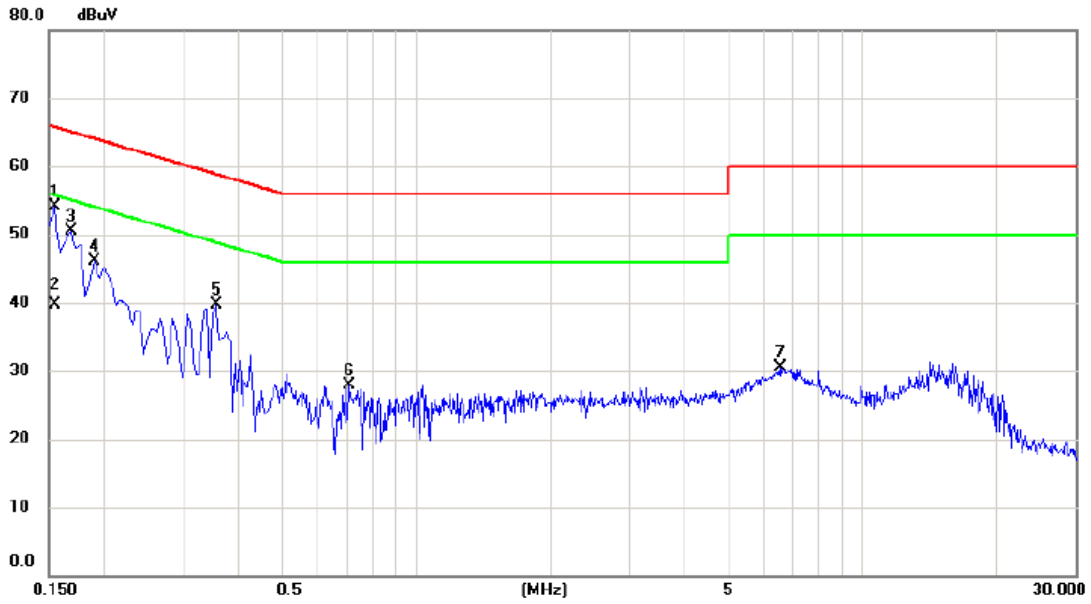

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1545	44.60	9.57	54.17	65.75	-11.58	peak	
2		0.1545	30.20	9.57	39.77	55.75	-15.98	AVG	
3		0.1680	41.00	9.57	50.57	65.06	-14.49	peak	
4		0.1905	36.45	9.57	46.02	64.01	-17.99	peak	
5		0.3570	30.06	9.58	39.64	58.80	-19.16	peak	
6		0.7080	18.24	9.72	27.96	56.00	-28.04	peak	
7		6.5445	20.13	10.38	30.51	60.00	-29.49	peak	

Test Mode : TX Mode_Adapter:Ou Lu Tong

Neutral

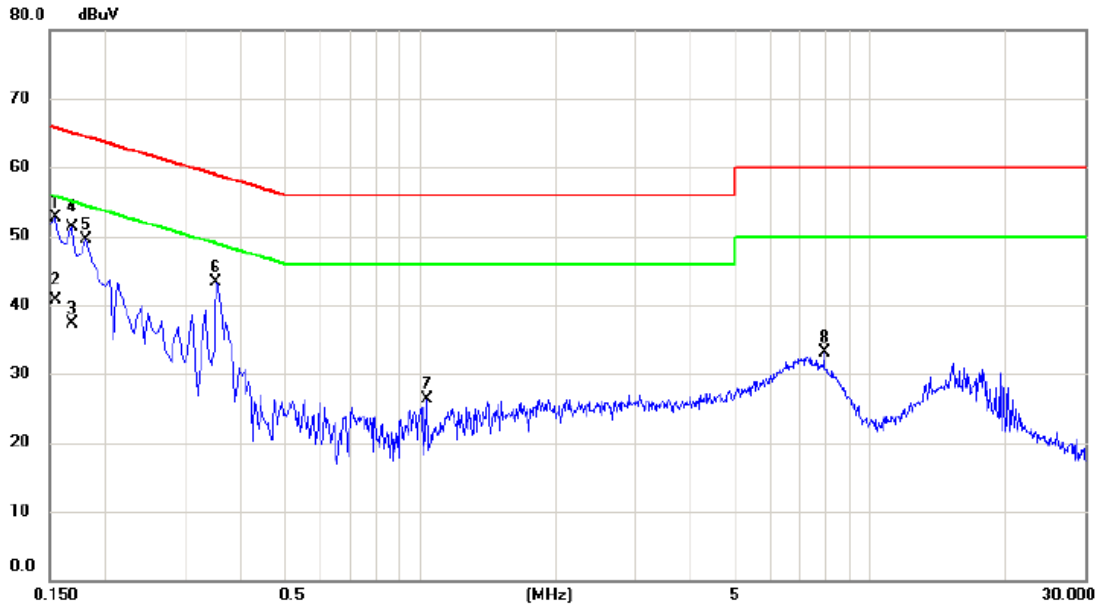


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1545	43.09	9.55	52.64	65.75	-13.11	peak	
2		0.1545	31.09	9.55	40.64	55.75	-15.11	AVG	
3		0.1680	27.73	9.48	37.21	65.06	-27.85	peak	
4	*	0.1680	41.73	9.48	51.21	55.06	-3.85	AVG	
5		0.1815	40.02	9.51	49.53	64.42	-14.89	peak	
6		0.3525	33.81	9.57	43.38	58.90	-15.52	peak	
7		1.0365	16.53	9.74	26.27	56.00	-29.73	peak	
8		7.9260	22.82	10.32	33.14	60.00	-26.86	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX B MODE CHANNEL 05 _Adapter:Fu Hua


Ant 0°

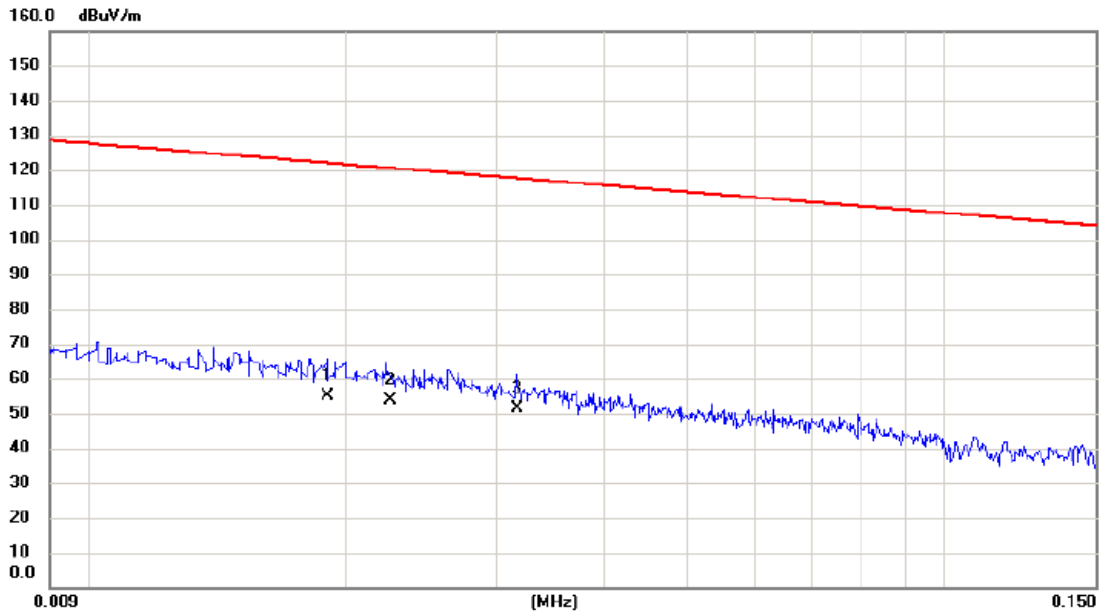

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0190	31.31	23.58	54.89	122.03	-67.14	AVG	
2		0.0225	30.45	23.21	53.66	120.56	-66.90	AVG	
3	*	0.0317	29.16	22.08	51.24	117.58	-66.34	AVG	

Test Mode: TX B MODE CHANNEL 05 _Adapter:Fu Hua

Ant 0°
Horizontal

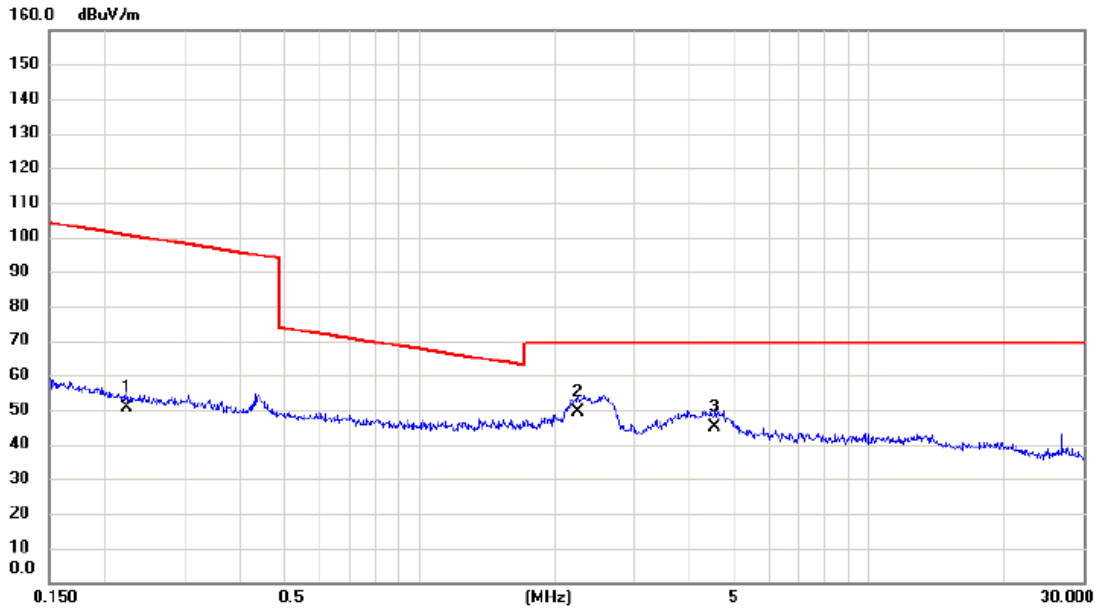


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2243	32.02	18.68	50.70	100.59	-49.89	AVG	
2	*	2.2486	31.66	17.59	49.25	69.54	-20.29	QP	
3		4.5254	27.50	17.67	45.17	69.54	-24.37	QP	

Test Mode: TX B MODE CHANNEL 05 _Adapter:Fu Hua

Ant 90°

Horizontal

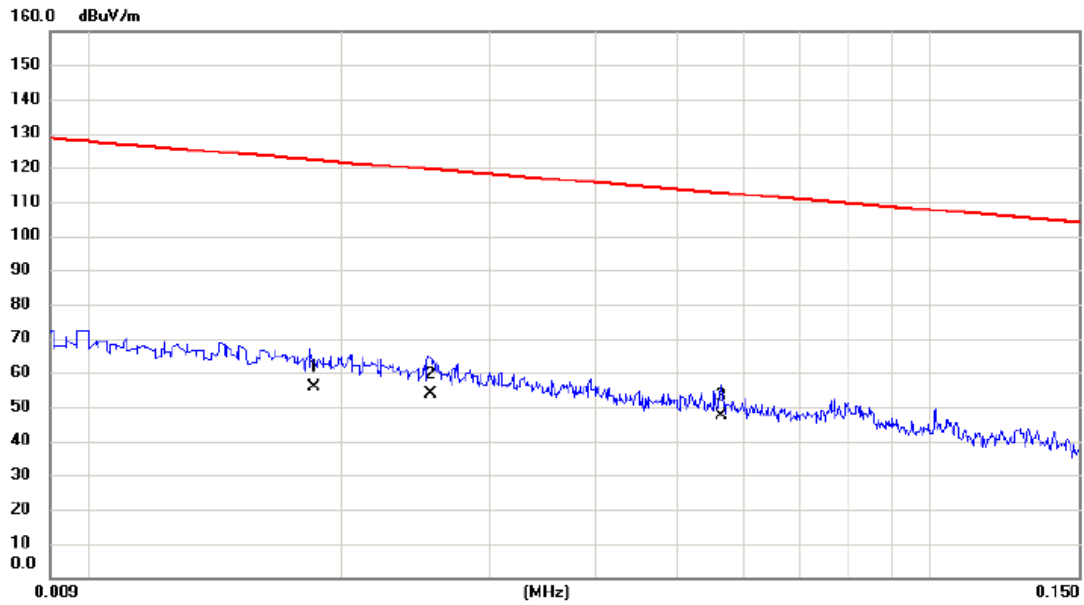


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0185	32.23	23.61	55.84	122.26	-66.42	AVG	
2		0.0255	31.08	22.84	53.92	119.47	-65.55	AVG	
3	*	0.0565	27.73	19.75	47.48	112.56	-65.08	AVG	

Test Mode: TX B MODE CHANNEL 05 _Adapter:Fu Hua

Ant 90°


Horizontal

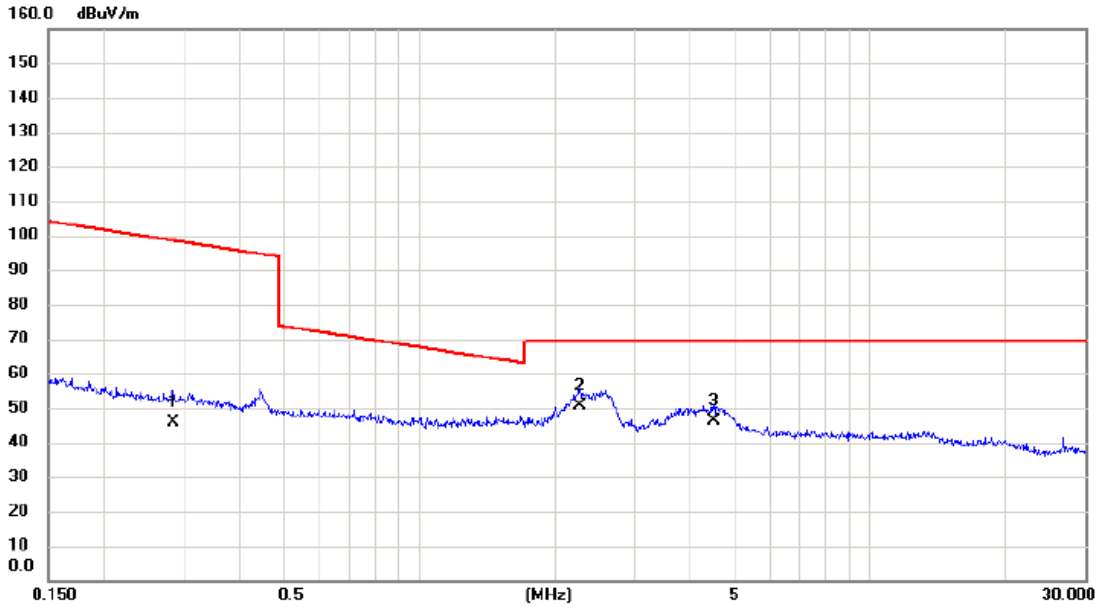

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2833	27.34	18.61	45.95	98.56	-52.61	AVG	
2	*	2.2726	33.19	17.56	50.75	69.54	-18.79	QP	
3		4.5015	28.47	17.72	46.19	69.54	-23.35	QP	

Test Mode: TX B MODE CHANNEL 05_Adapter:Ou Lu Tong


Ant 0°

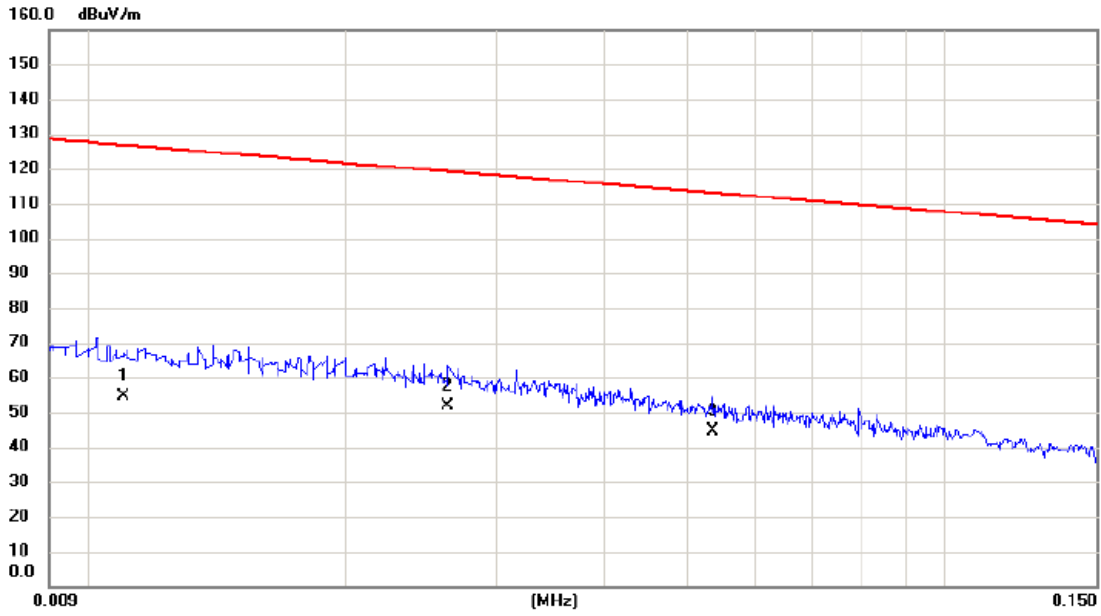

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0110	30.54	24.06	54.60	126.78	-72.18	AVG	
2	*	0.0263	28.91	22.74	51.65	119.21	-67.56	AVG	
3		0.0536	24.63	19.78	44.41	113.02	-68.61	AVG	

Test Mode: TX B MODE CHANNEL 05 _Adapter:Ou Lu Tong

Ant 0°
Horizontal

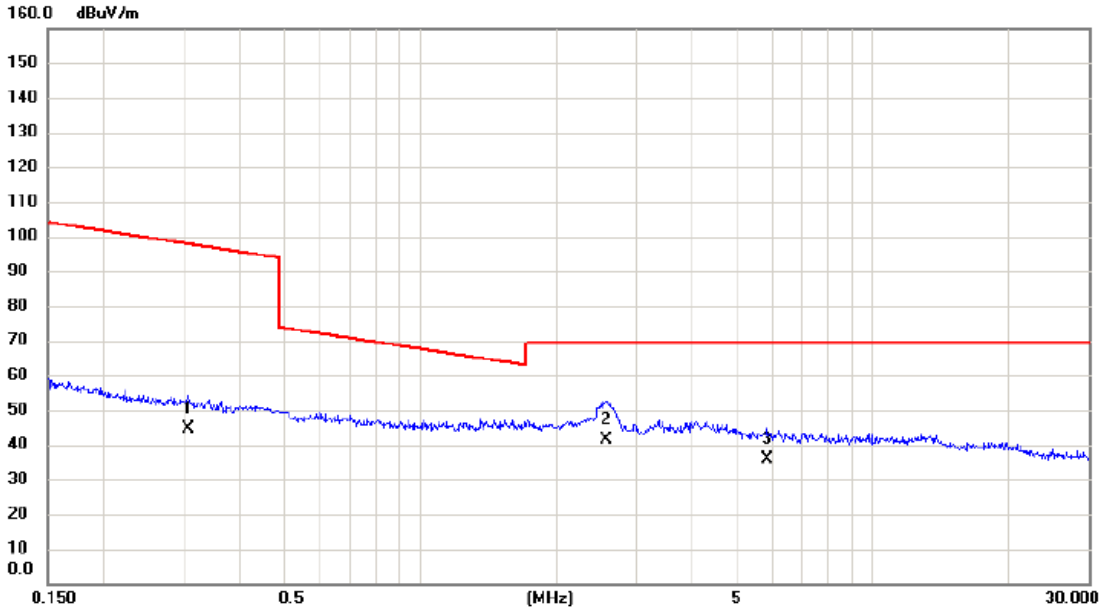


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3082	25.83	18.58	44.41	97.83	-53.42	AVG	
2	*	2.5807	24.16	17.17	41.33	69.54	-28.21	QP	
3		5.8357	19.22	16.54	35.76	69.54	-33.78	QP	

Test Mode: TX B MODE CHANNEL 05 _Adapter:Ou Lu Tong

Ant 90°


Horizontal

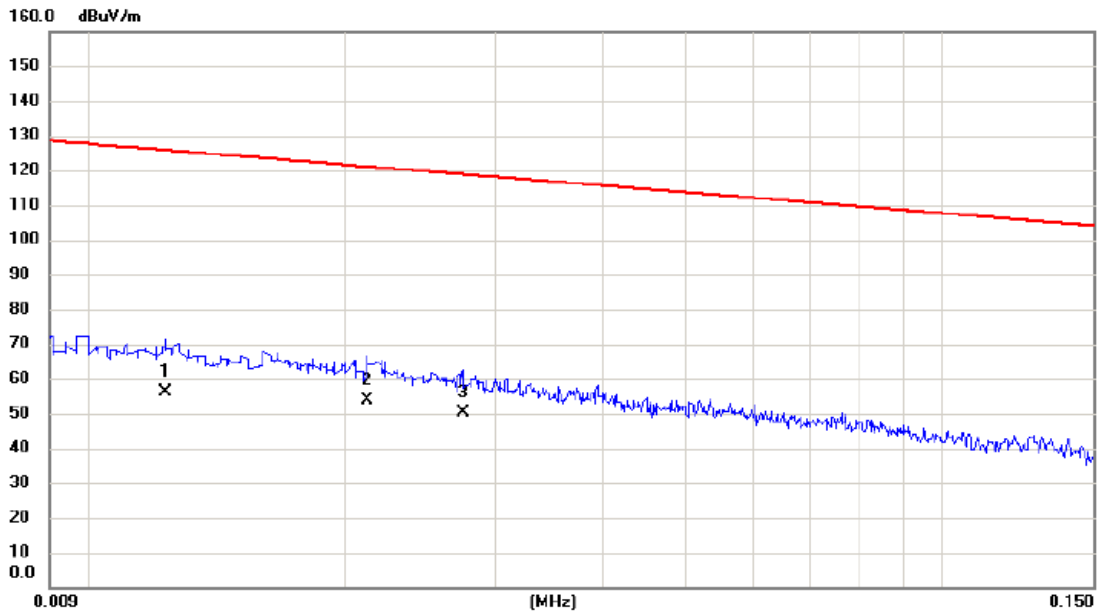

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0123	32.11	23.98	56.09	125.81	-69.72	AVG	
2	*	0.0212	30.32	23.37	53.69	121.08	-67.39	AVG	
3		0.0275	27.81	22.59	50.40	118.82	-68.42	AVG	

Test Mode: TX B MODE CHANNEL 05 _Adapter:Ou Lu Tong

Ant 90°
Horizontal

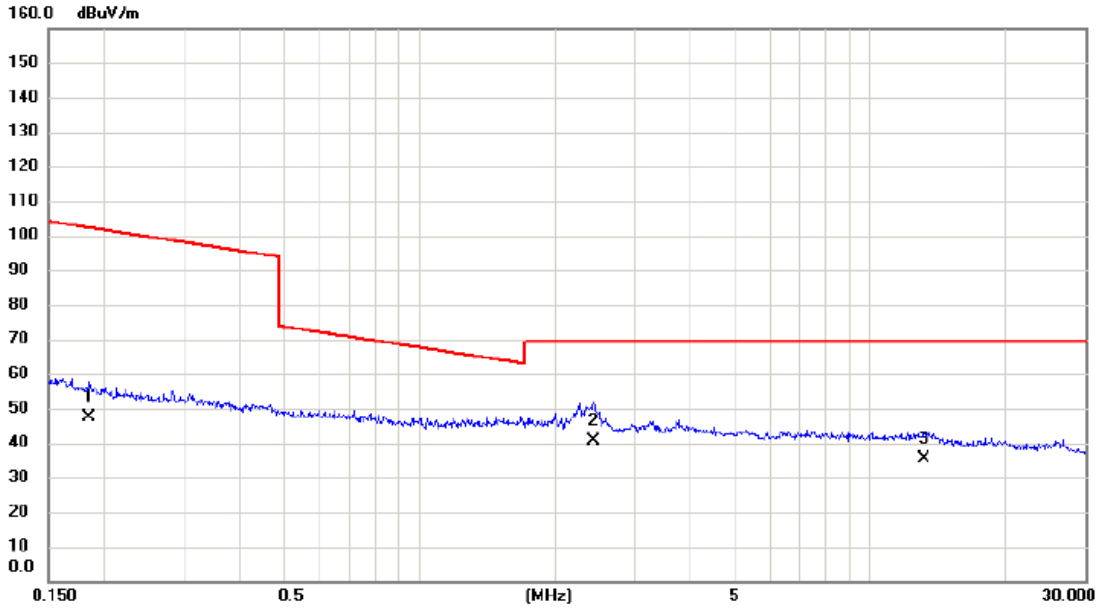


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1853	28.66	18.70	47.36	102.25	-54.89	AVG	
2	*	2.4346	23.31	17.36	40.67	69.54	-28.87	QP	
3		13.1965	19.53	15.75	35.28	69.54	-34.26	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX B MODE CHANNEL 05 _Adapter:Fu Hua


Vertical

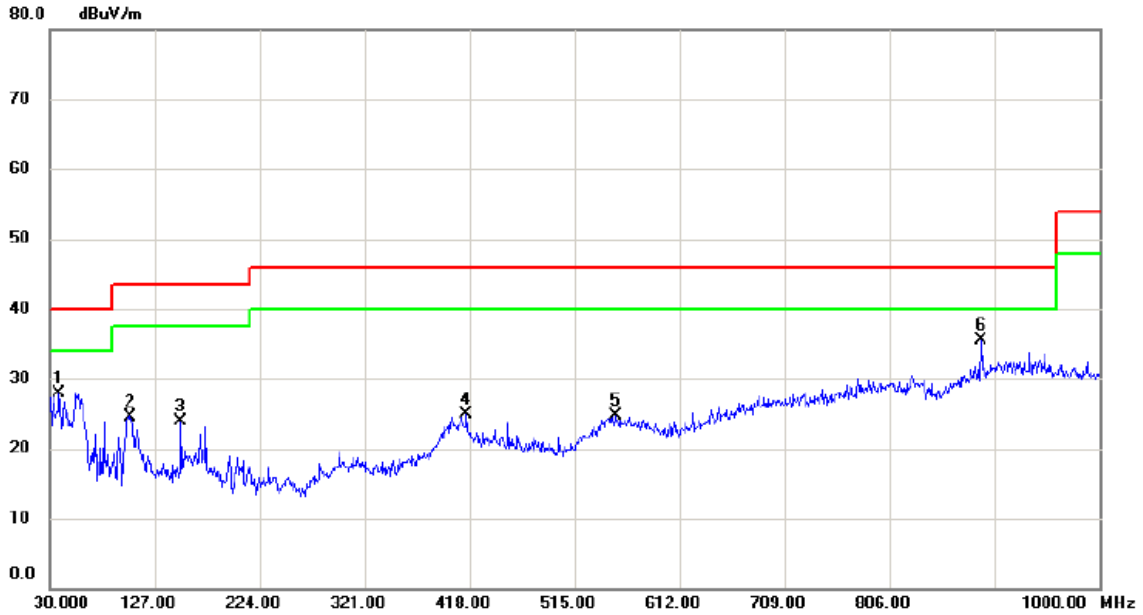

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.730	41.89	-14.06	27.83	40.00	-12.17	peak	
2		104.690	39.68	-15.08	24.60	43.50	-18.90	peak	
3		151.250	36.67	-12.84	23.83	43.50	-19.67	peak	
4		415.090	32.73	-7.85	24.88	46.00	-21.12	peak	
5		552.830	29.38	-4.68	24.70	46.00	-21.30	peak	
6	*	890.390	33.64	1.90	35.54	46.00	-10.46	peak	

Test Mode: TX B MODE CHANNEL 05_Adapter:Fu Hua


Horizontal

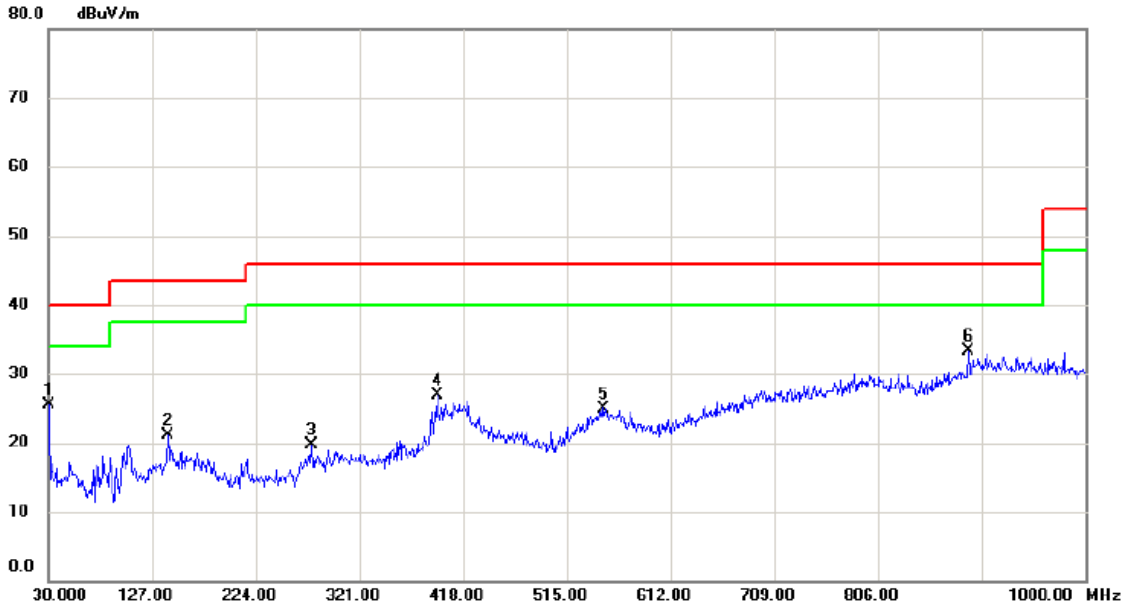

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.000	39.61	-14.03	25.58	40.00	-14.42	peak	
2		141.550	34.64	-13.62	21.02	43.50	-22.48	peak	
3		276.380	32.15	-12.54	19.61	46.00	-26.39	peak	
4		393.750	35.03	-8.21	26.82	46.00	-19.18	peak	
5		549.920	29.55	-4.55	25.00	46.00	-21.00	peak	
6	*	890.390	31.46	1.90	33.36	46.00	-12.64	peak	

Test Mode: TX B MODE CHANNEL 11_Adapter:Fu Hua


Vertical

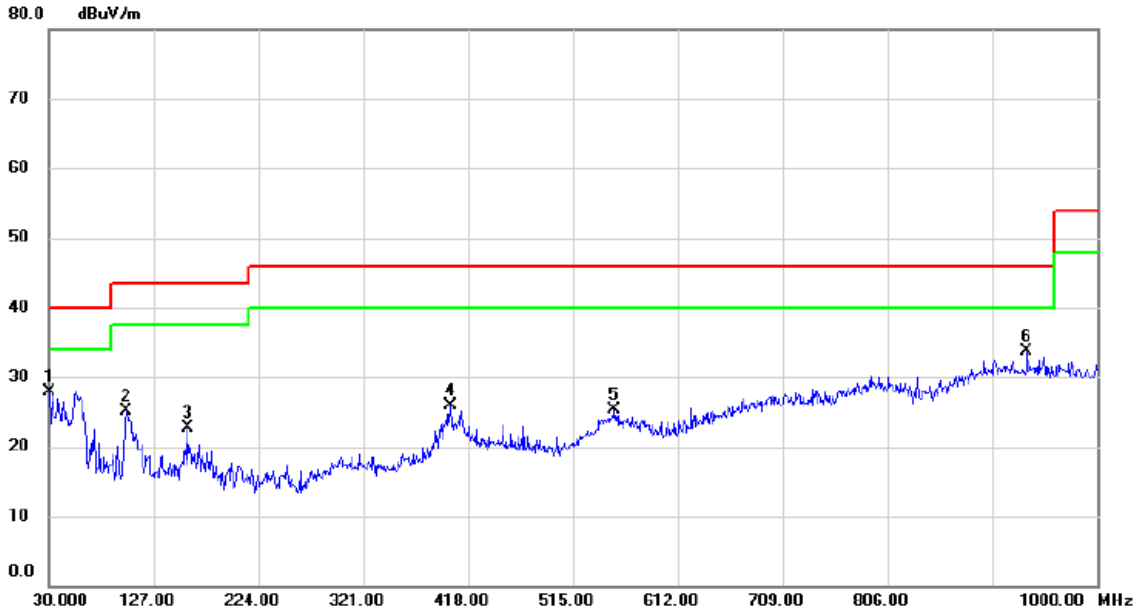

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.970	41.99	-14.12	27.87	40.00	-12.13	peak	
2		101.780	40.39	-15.32	25.07	43.50	-18.43	peak	
3		158.040	35.04	-12.31	22.73	43.50	-20.77	peak	
4		401.510	33.79	-7.79	26.00	46.00	-20.00	peak	
5		553.800	29.98	-4.73	25.25	46.00	-20.75	peak	
6		935.010	31.22	2.50	33.72	46.00	-12.28	peak	


Test Mode: TX B MODE CHANNEL 11_Adapter:Fu Hua

Horizontal

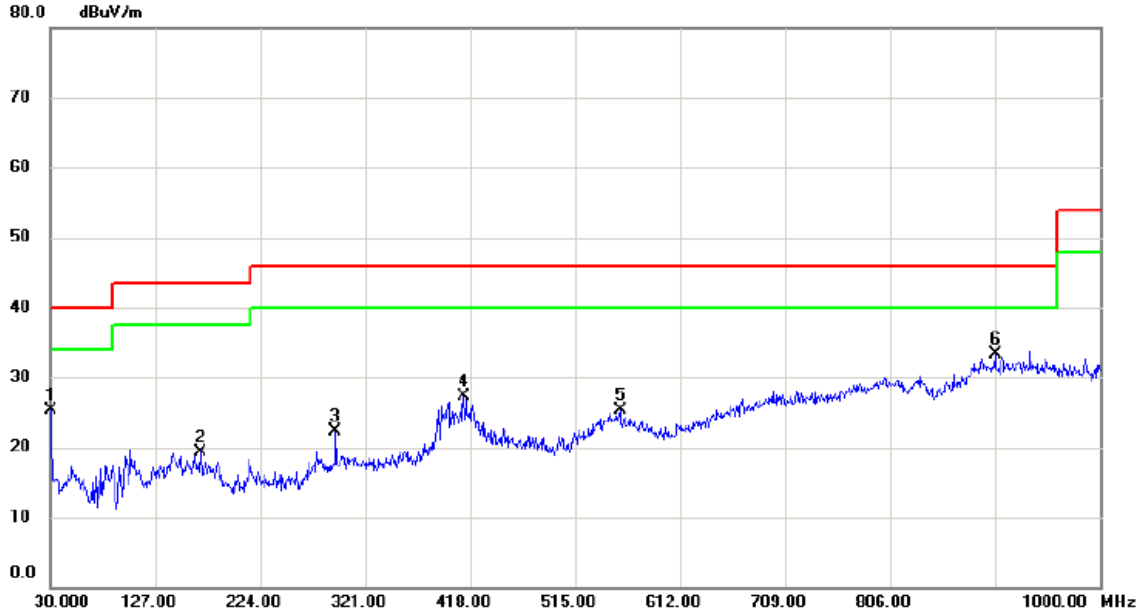

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.000	39.27	-14.03	25.24	40.00	-14.76	peak	
2		168.710	31.52	-12.23	19.29	43.50	-24.21	peak	
3		293.840	33.10	-10.83	22.27	46.00	-23.73	peak	
4		412.180	35.06	-7.84	27.22	46.00	-18.78	peak	
5		556.710	30.23	-4.88	25.35	46.00	-20.65	peak	
6	*	903.000	30.67	2.63	33.30	46.00	-12.70	peak	


Test Mode: TX B MODE CHANNEL 05 _Adapter:Ou Lu Tong

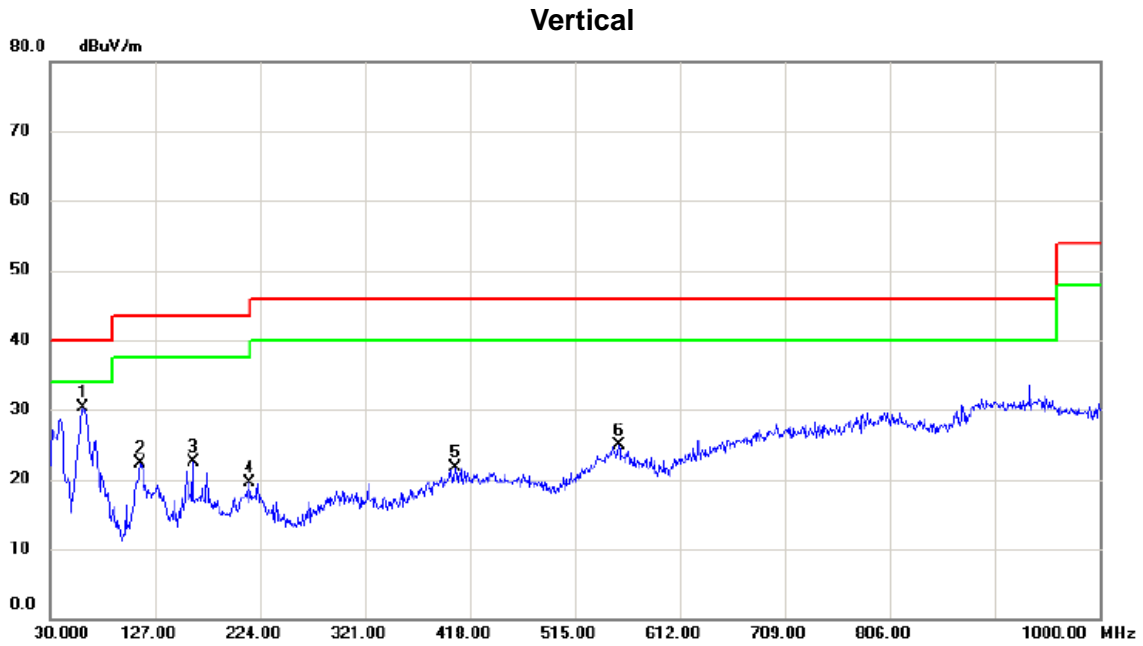

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	60.070	43.96	-13.74	30.22	40.00	-9.78	peak	
2		113.420	36.62	-14.25	22.37	43.50	-21.13	peak	
3		161.920	34.57	-12.16	22.41	43.50	-21.09	peak	
4		214.300	34.01	-14.47	19.54	43.50	-23.96	peak	
5		404.420	29.59	-7.80	21.79	46.00	-24.21	peak	
6		555.740	29.80	-4.83	24.97	46.00	-21.03	peak	


Test Mode: TX B MODE CHANNEL 05_Adapter:Ou Lu Tong

Horizontal

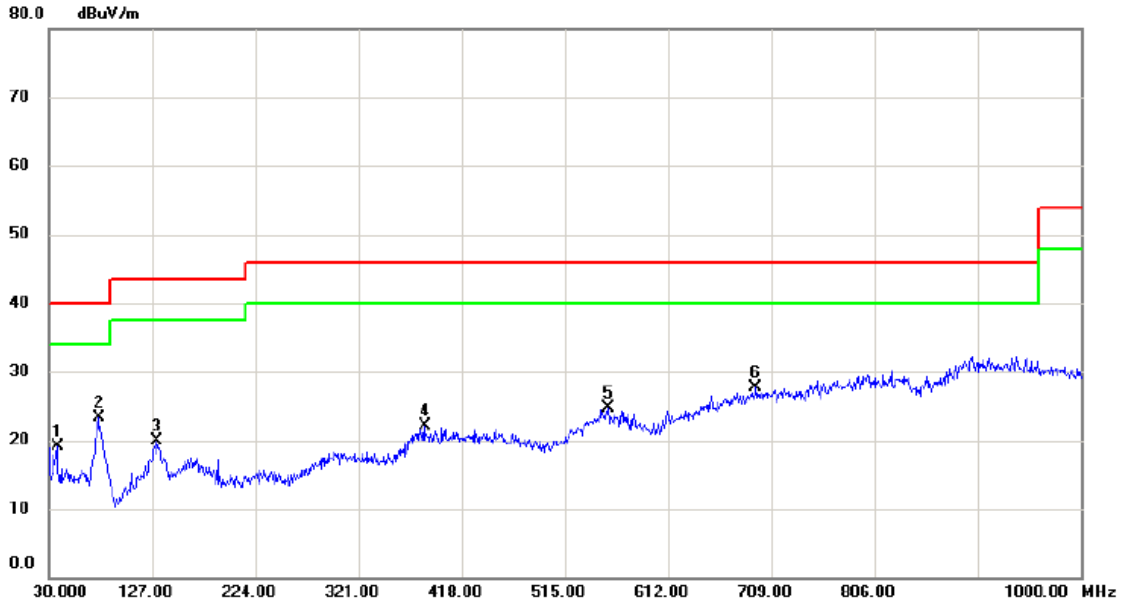

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.760	33.12	-14.09	19.03	40.00	-20.97	peak	
2	*	77.530	39.62	-16.31	23.31	40.00	-16.69	peak	
3		130.880	32.48	-12.48	20.00	43.50	-23.50	peak	
4		383.080	30.98	-8.94	22.04	46.00	-23.96	peak	
5		555.740	29.60	-4.83	24.77	46.00	-21.23	peak	
6		694.450	30.06	-2.33	27.73	46.00	-18.27	peak	


Test Mode: TX B MODE CHANNEL 11_Adapter:Ou Lu Tong

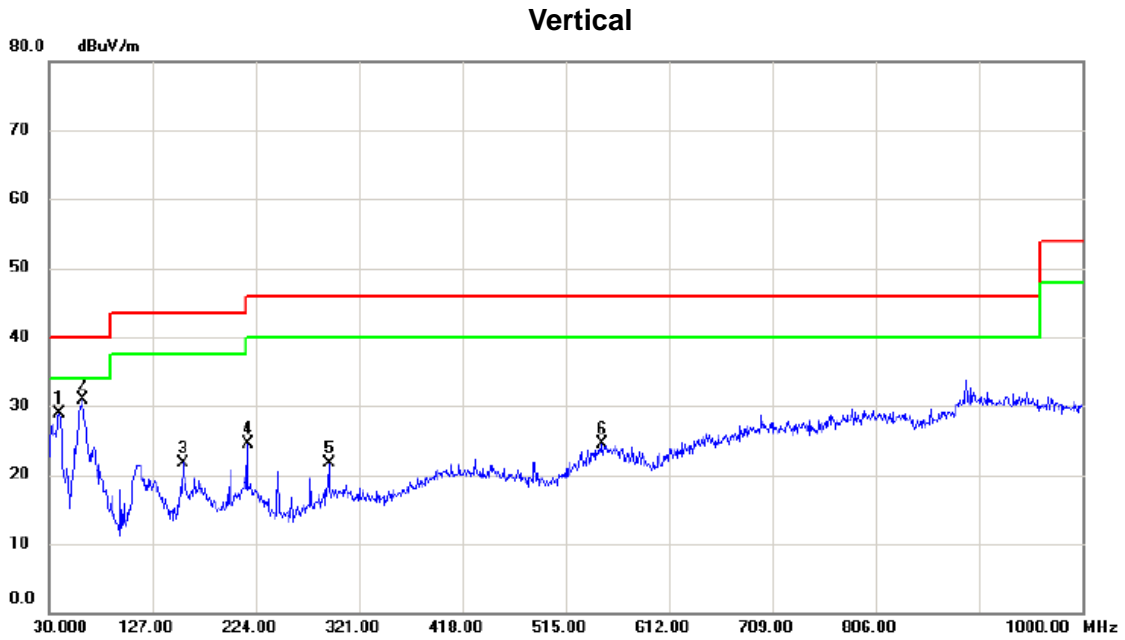

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.700	42.79	-13.95	28.84	40.00	-11.16	peak	
2	*	62.010	45.29	-14.30	30.99	40.00	-9.01	peak	
3		156.100	34.26	-12.46	21.80	43.50	-21.70	peak	
4		216.240	38.99	-14.40	24.59	46.00	-21.41	peak	
5		292.870	32.70	-10.93	21.77	46.00	-24.23	peak	
6		548.950	29.17	-4.64	24.53	46.00	-21.47	peak	

Test Mode: TX B MODE CHANNEL 11_Adapter:Ou Lu Tong

Horizontal

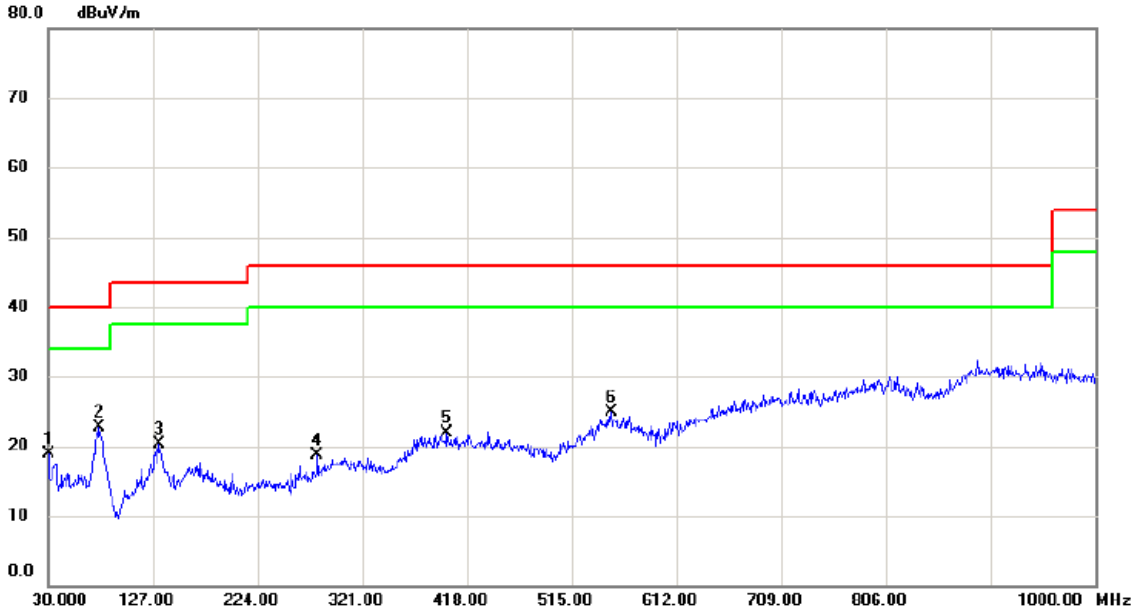


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.000	32.89	-14.03	18.86	40.00	-21.14	peak	
2	*	77.530	38.99	-16.31	22.68	40.00	-17.32	peak	
3		132.820	33.07	-12.75	20.32	43.50	-23.18	peak	
4		279.290	30.81	-12.13	18.68	46.00	-27.32	peak	
5		399.570	29.74	-7.81	21.93	46.00	-24.07	peak	
6		551.860	29.58	-4.63	24.95	46.00	-21.05	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0


Vertical

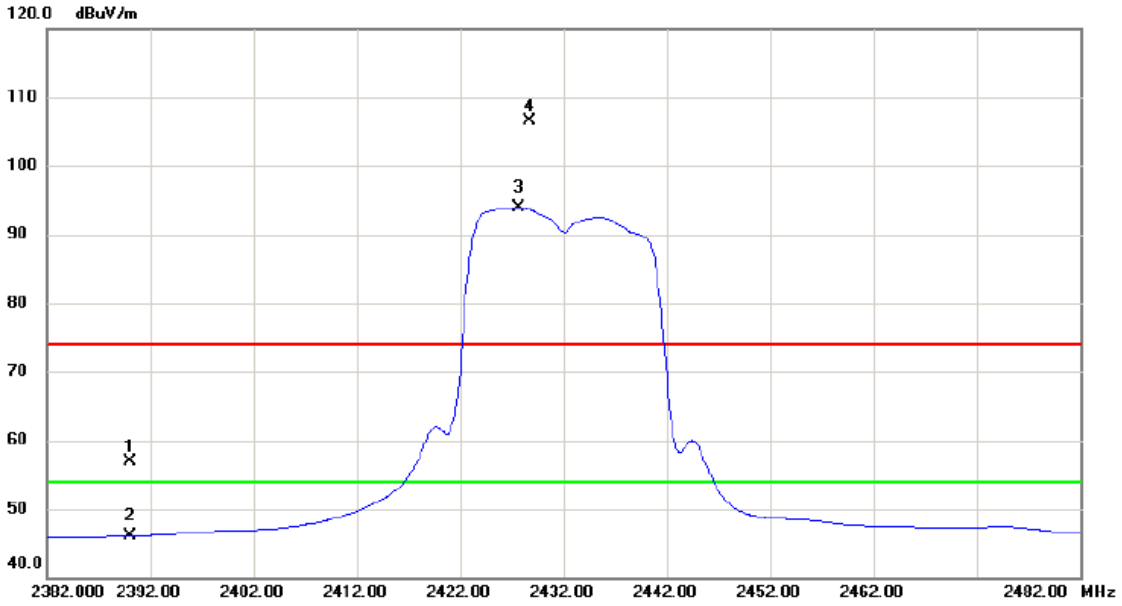


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	23.95	33.01	56.96	74.00	-17.04	peak	
2	2390.000	13.08	33.01	46.09	54.00	-7.91	AVG	
3 *	2427.700	60.83	33.17	94.00	54.00	40.00	AVG	No Limit
4 X	2428.700	73.37	33.17	106.54	74.00	32.54	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0

Vertical

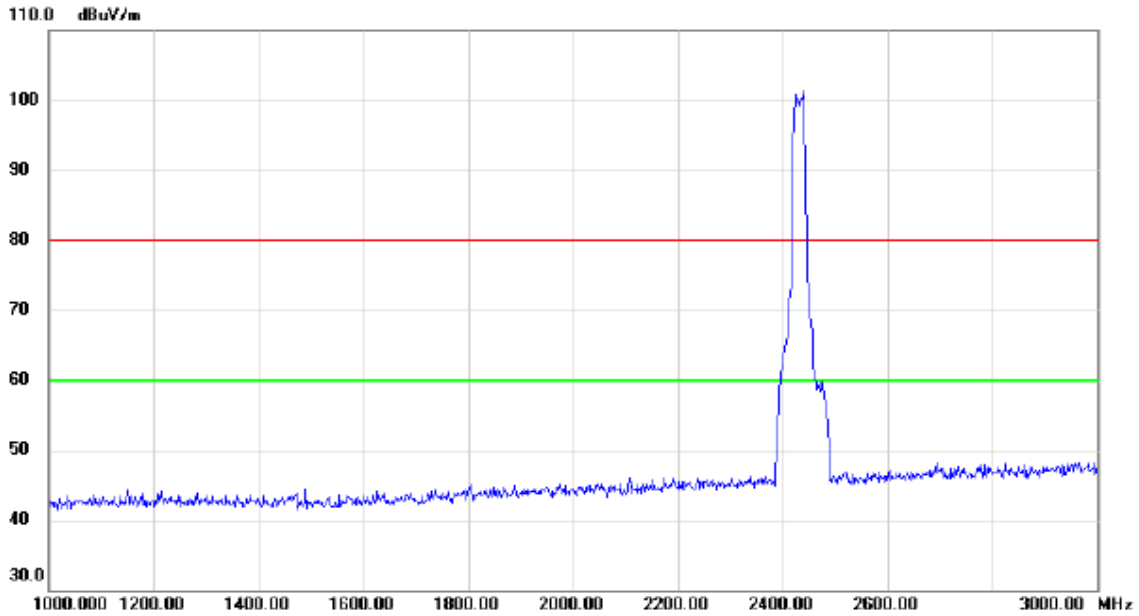


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

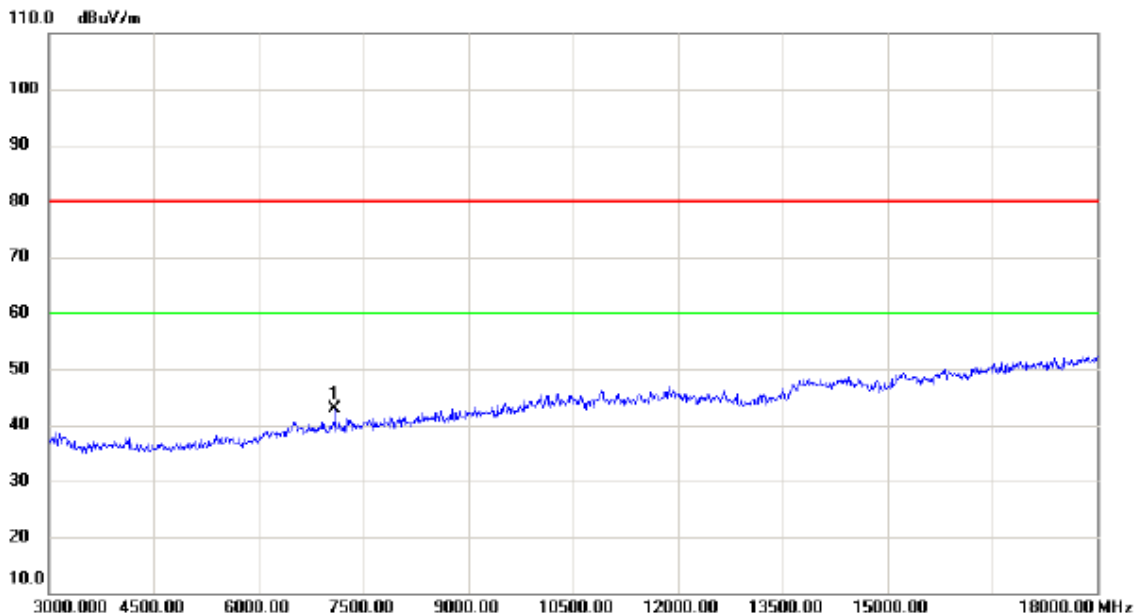

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0


Vertical

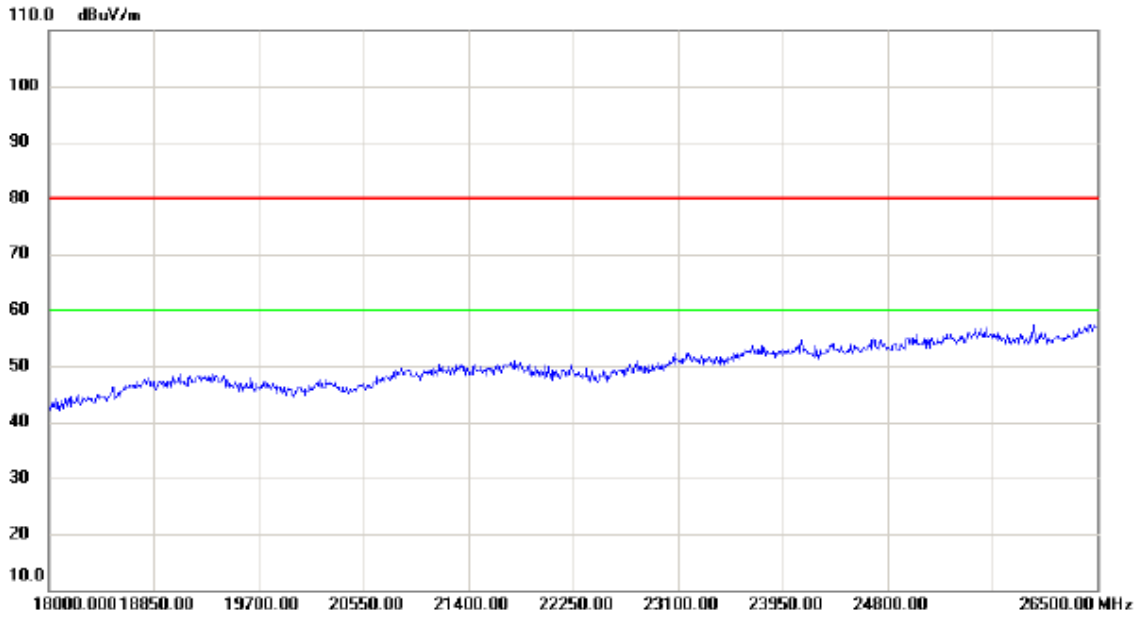

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0


Horizontal

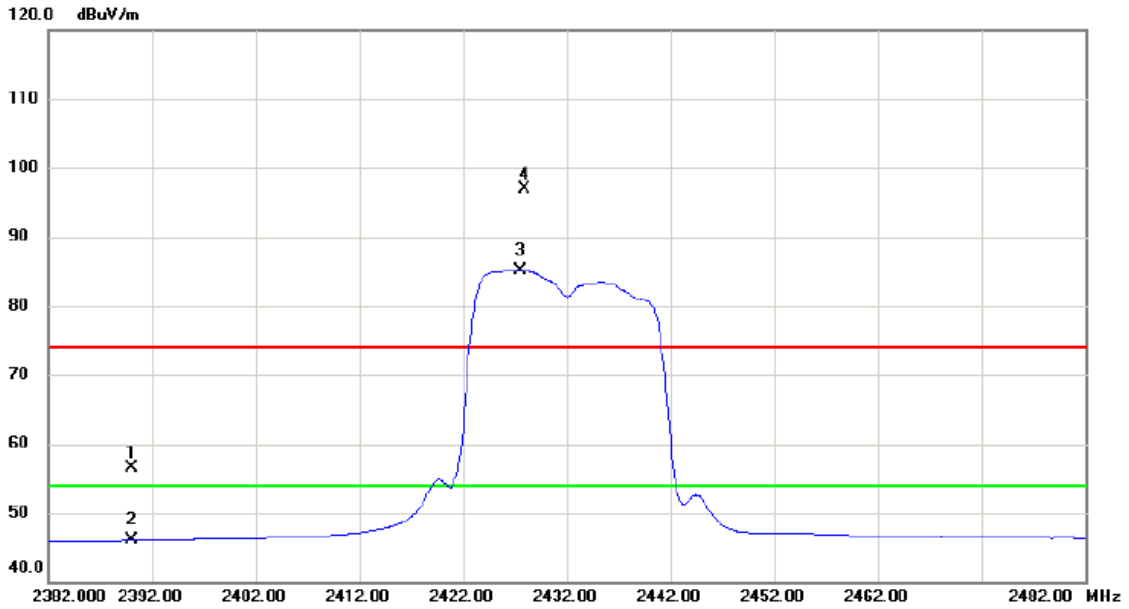


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.52	33.01	56.53	74.00	-17.47	peak	
2		2390.000	13.01	33.01	46.02	54.00	-7.98	AVG	
3	*	2427.600	52.03	33.17	85.20	54.00	31.20	AVG	No Limit
4	X	2427.900	63.78	33.17	96.95	74.00	22.95	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0

Horizontal

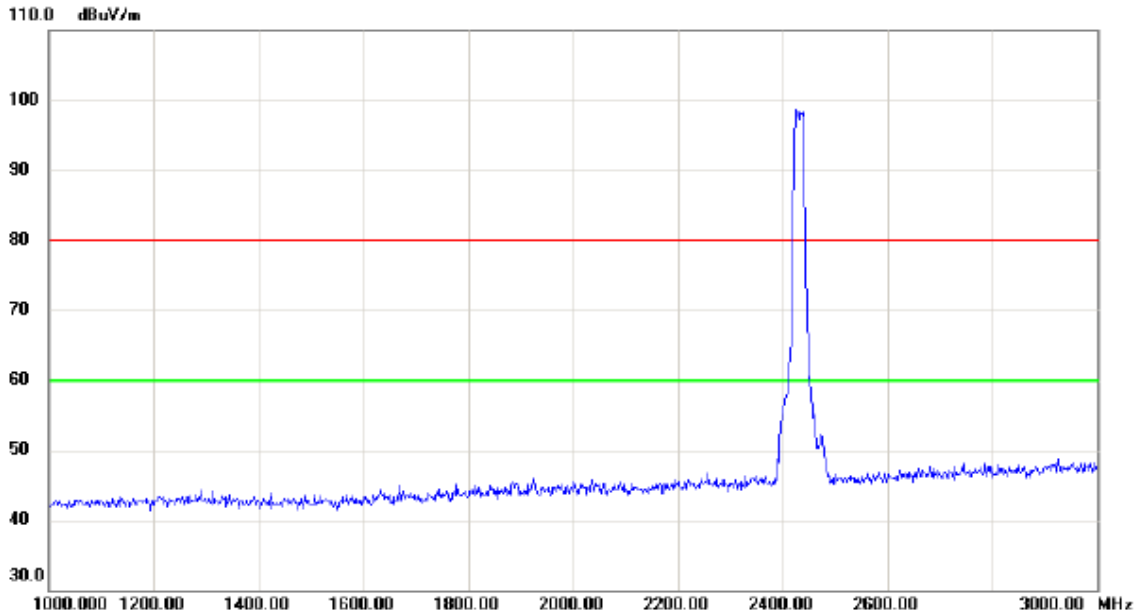


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

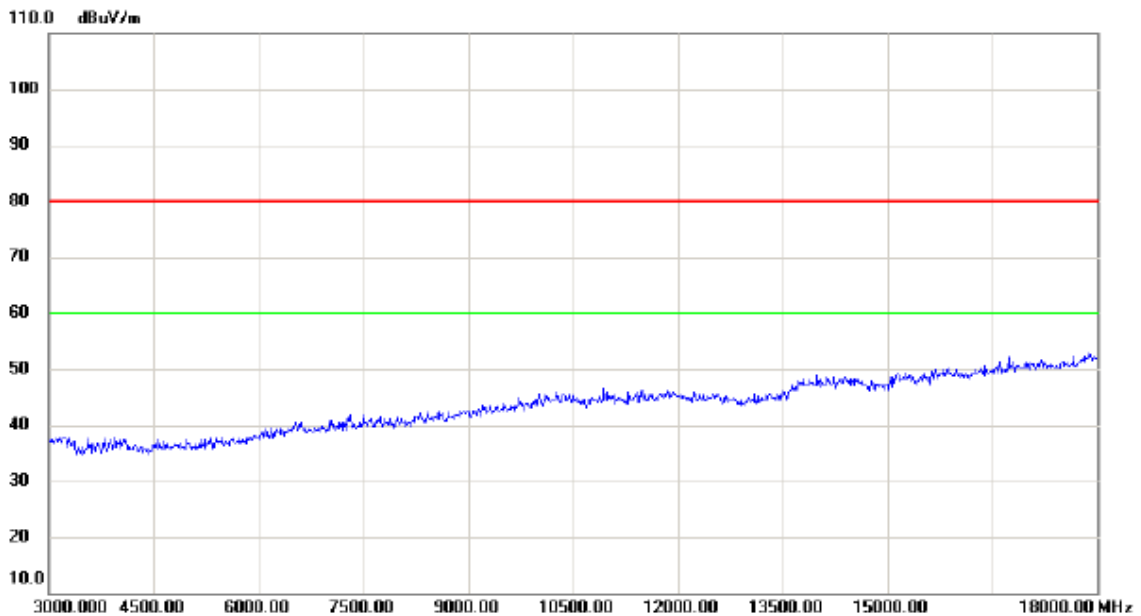

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0


Horizontal

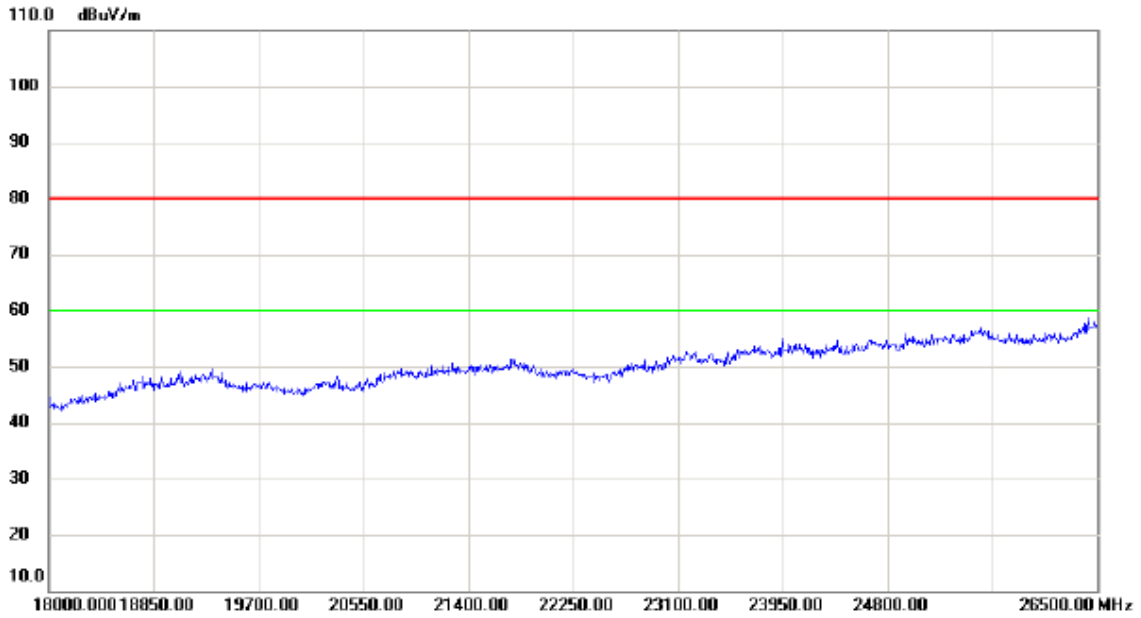

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0


Vertical

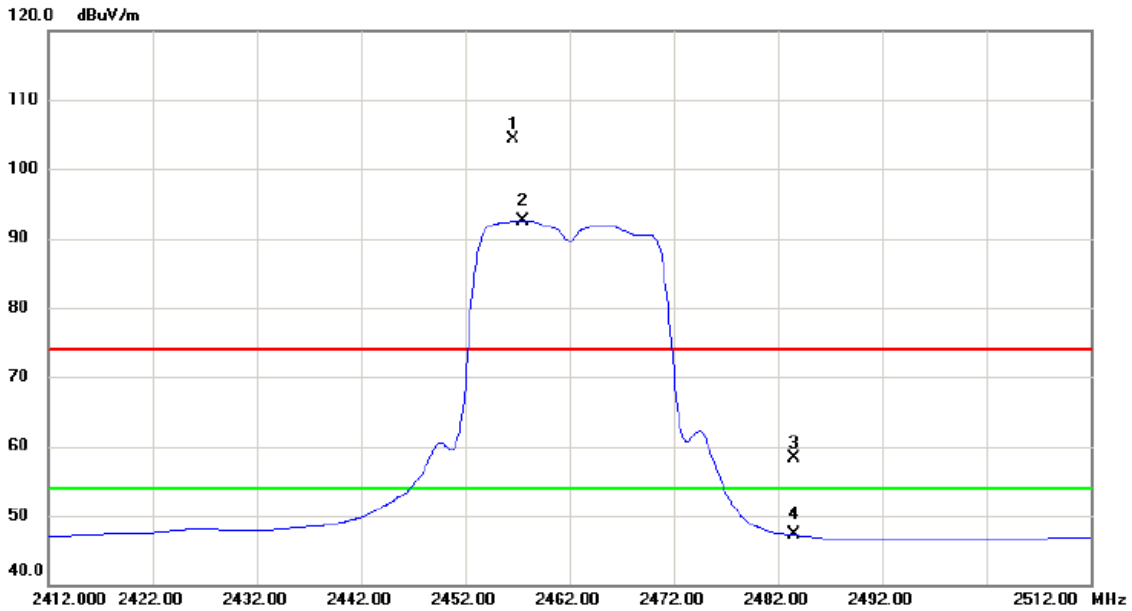


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.600	71.09	33.29	104.38	74.00	30.38	peak	No Limit
2	*	2457.600	59.29	33.29	92.58	54.00	38.58	AVG	No Limit
3		2483.500	24.90	33.40	58.30	74.00	-15.70	peak	
4		2483.500	13.87	33.40	47.27	54.00	-6.73	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0

Vertical

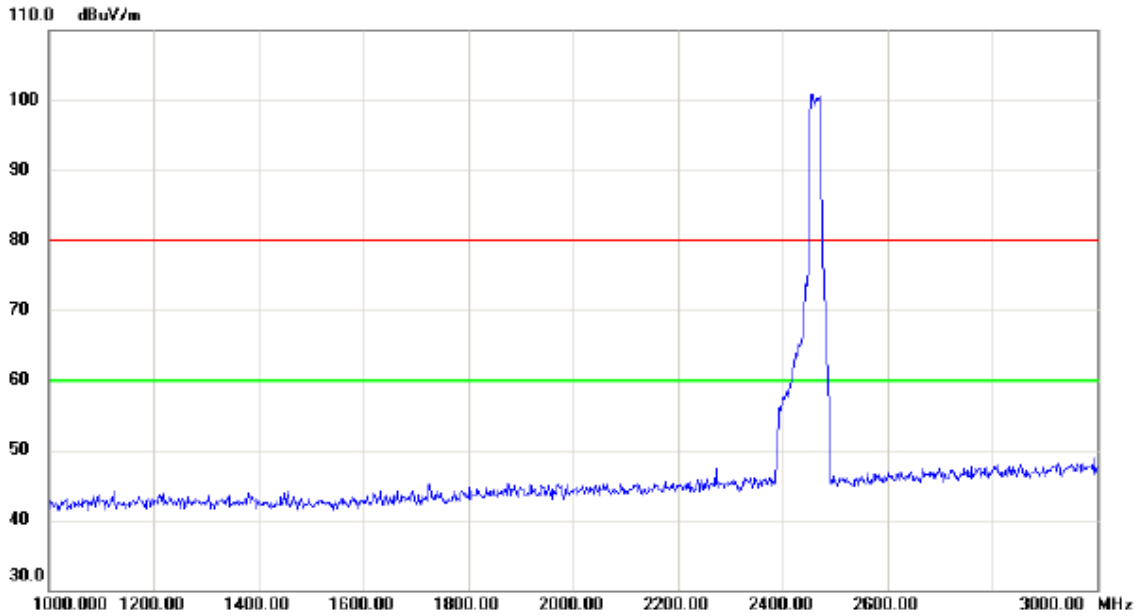


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

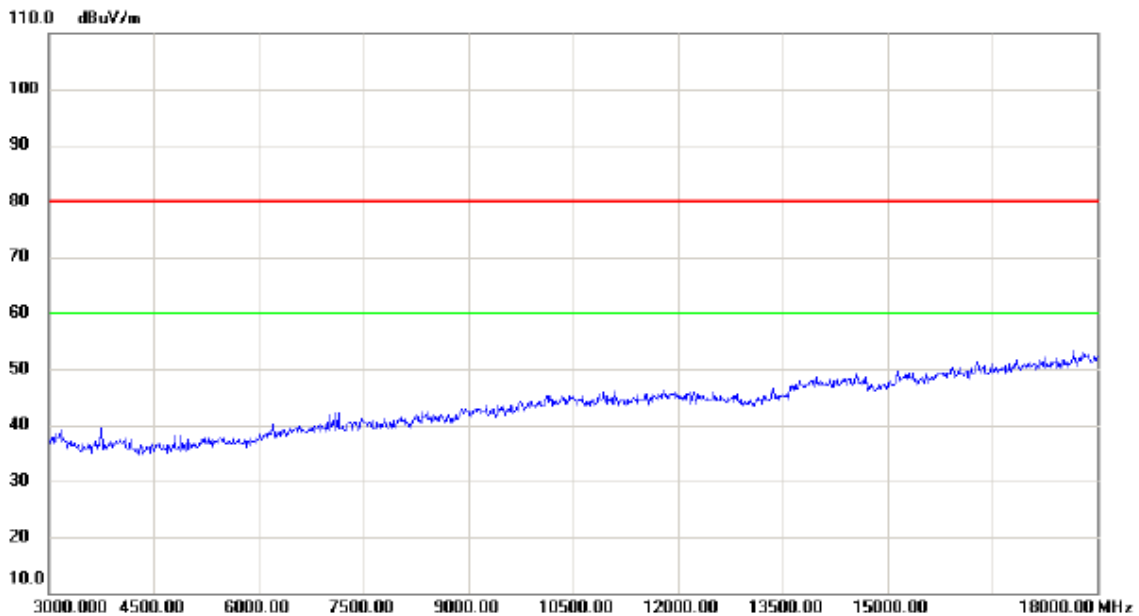

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0


Vertical

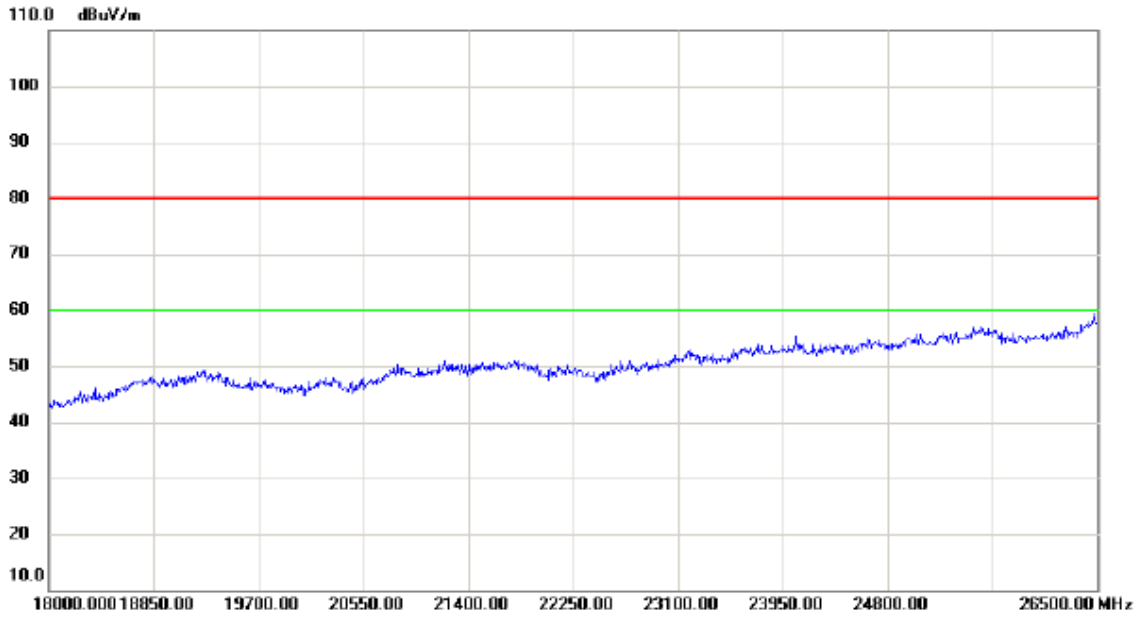

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0


Horizontal

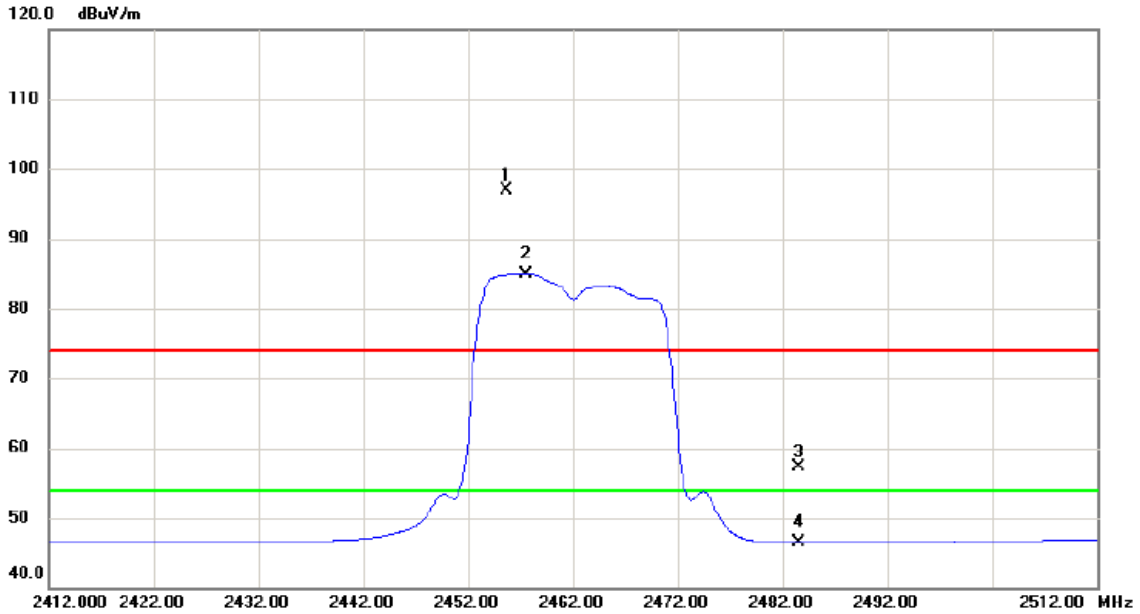


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2455.700	63.58	33.29	96.87	74.00	22.87	peak	No Limit
2	*	2457.500	51.70	33.29	84.99	54.00	30.99	AVG	No Limit
3		2483.500	23.93	33.40	57.33	74.00	-16.67	peak	
4		2483.500	13.09	33.40	46.49	54.00	-7.51	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0

Horizontal

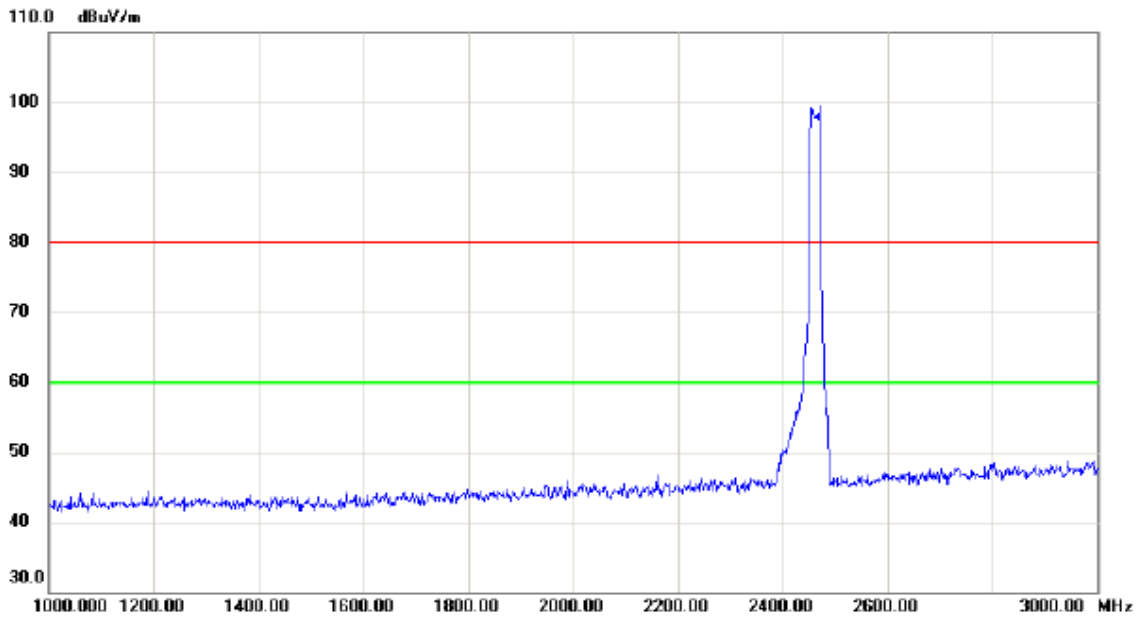


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

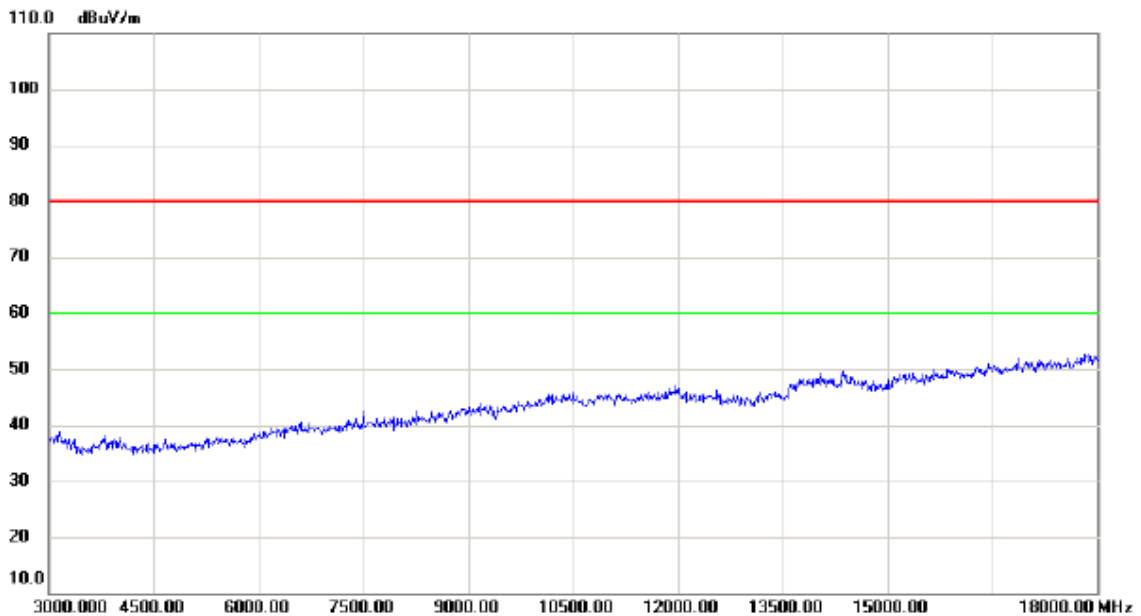

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0


Horizontal

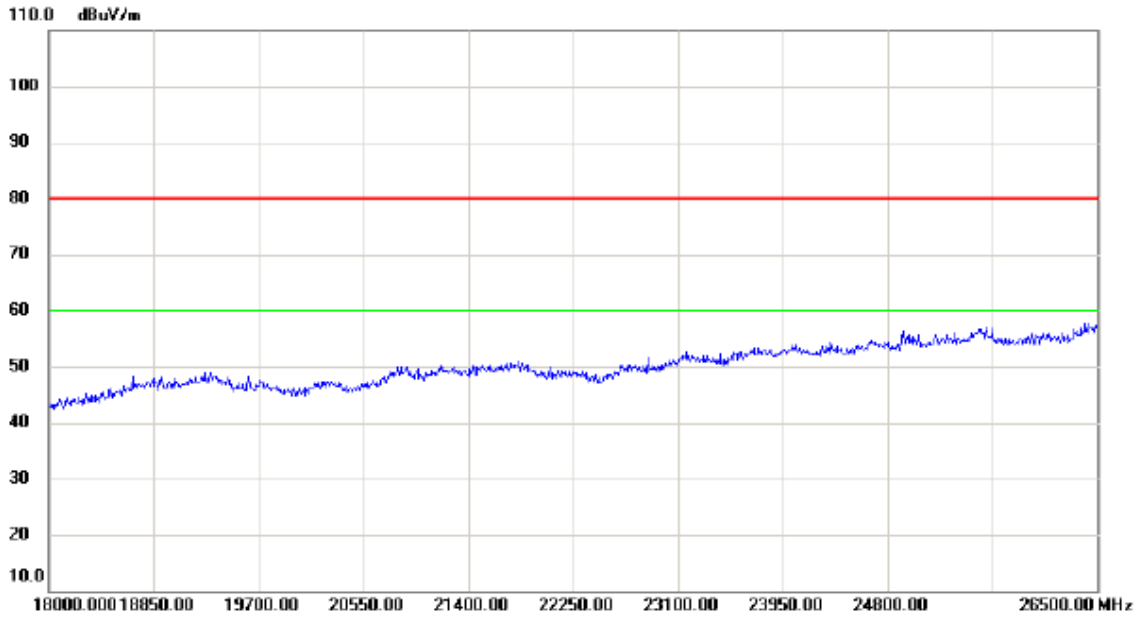

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0


Vertical

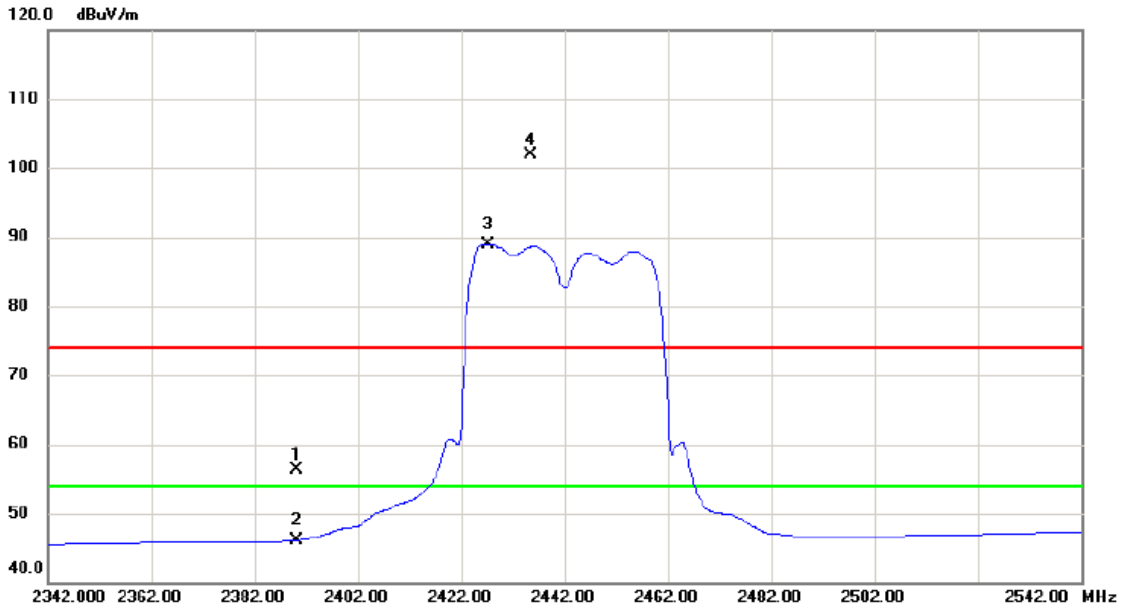


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.21	33.01	56.22	74.00	-17.78	peak	
2		2390.000	13.15	33.01	46.16	54.00	-7.84	AVG	
3	*	2427.200	55.77	33.17	88.94	54.00	34.94	AVG	No Limit
4	X	2435.600	68.75	33.20	101.95	74.00	27.95	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0

Vertical

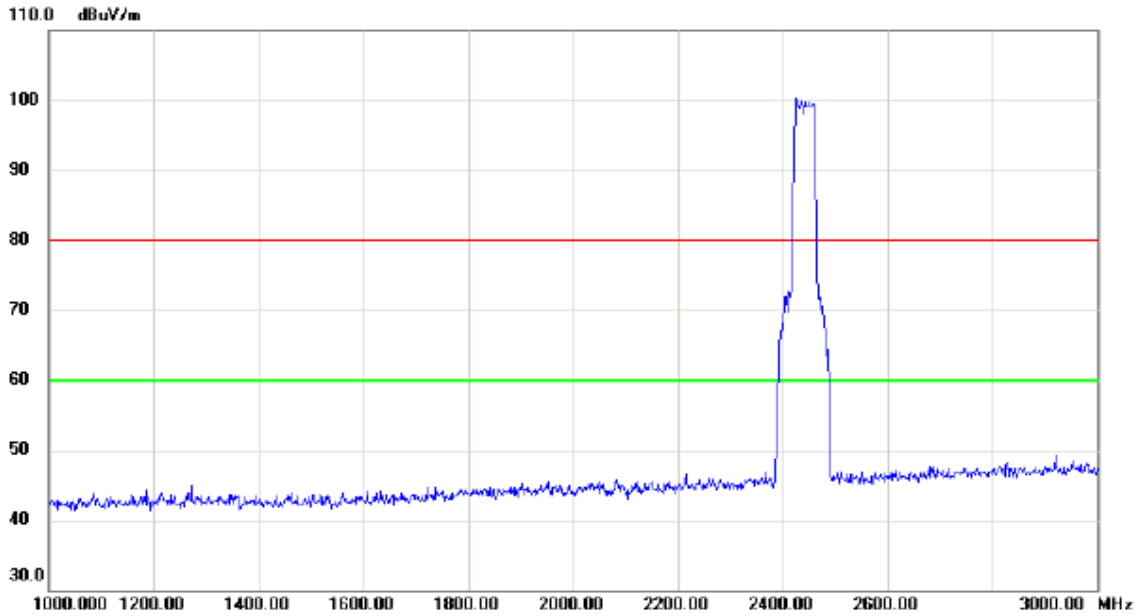


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

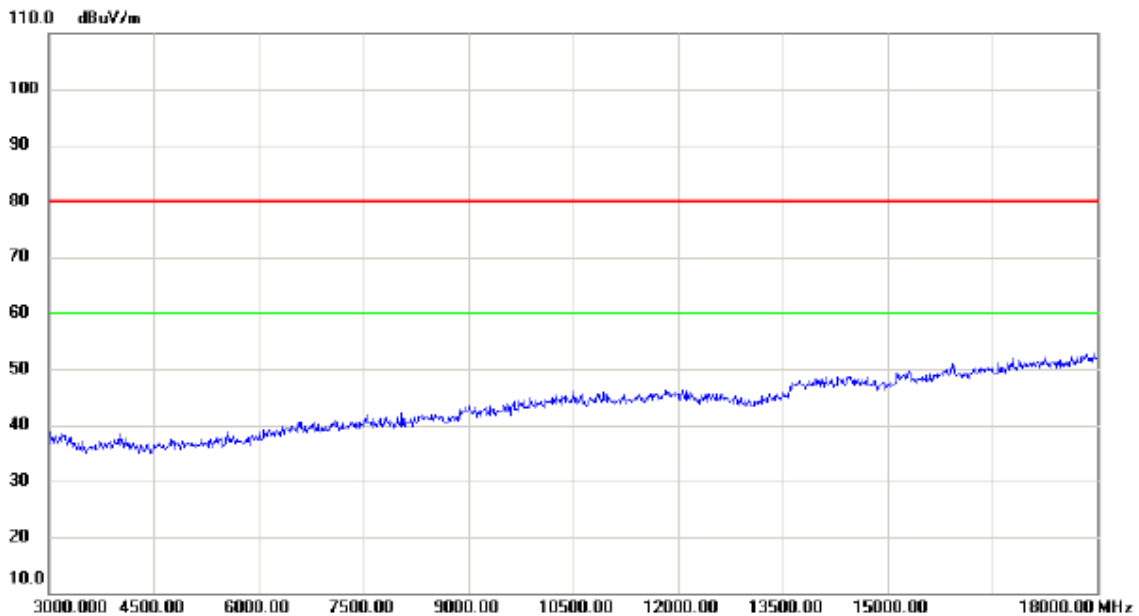

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0


Vertical

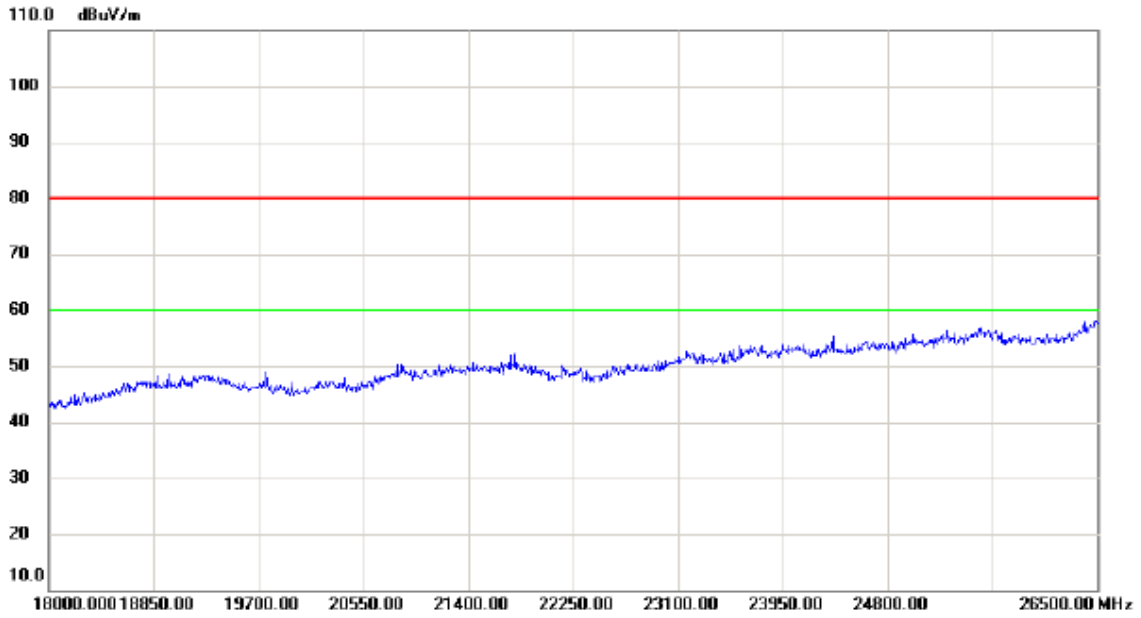

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0


Horizontal

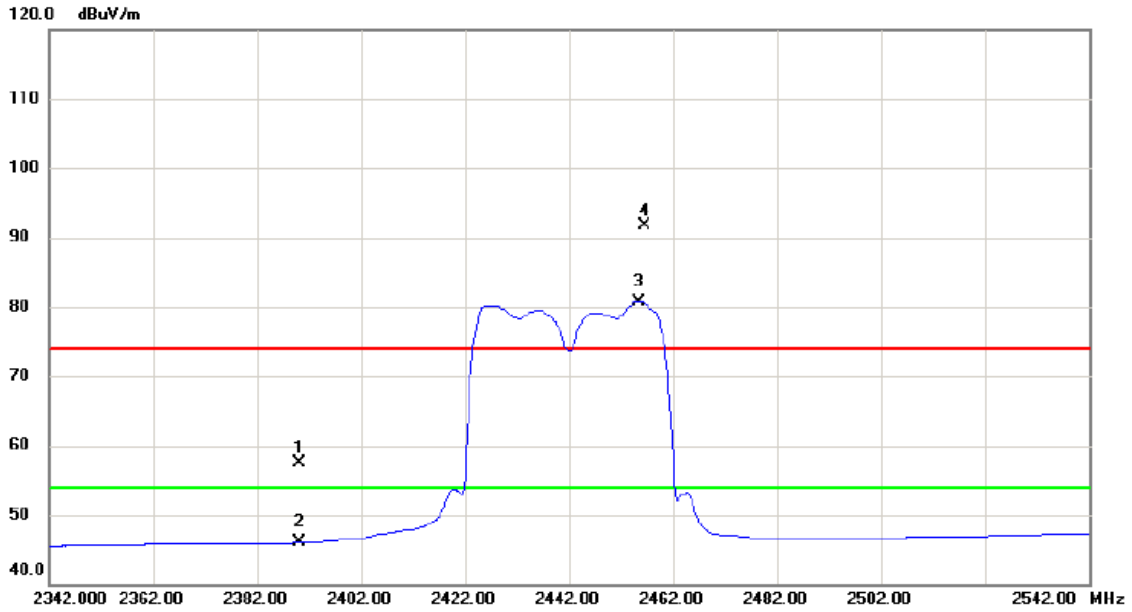


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	24.46	33.01	57.47	74.00	-16.53	peak	
2		2390.000	13.02	33.01	46.03	54.00	-7.97	AVG	
3	*	2455.600	47.50	33.29	80.79	54.00	26.79	AVG	No Limit
4	X	2456.400	58.49	33.29	91.78	74.00	17.78	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0

Horizontal

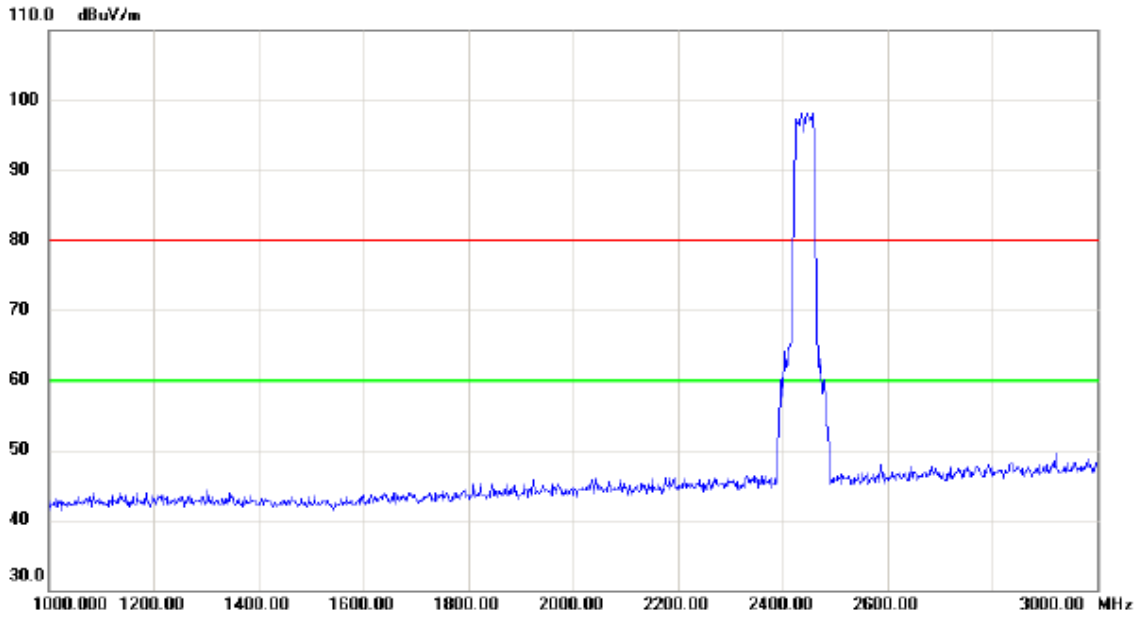


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

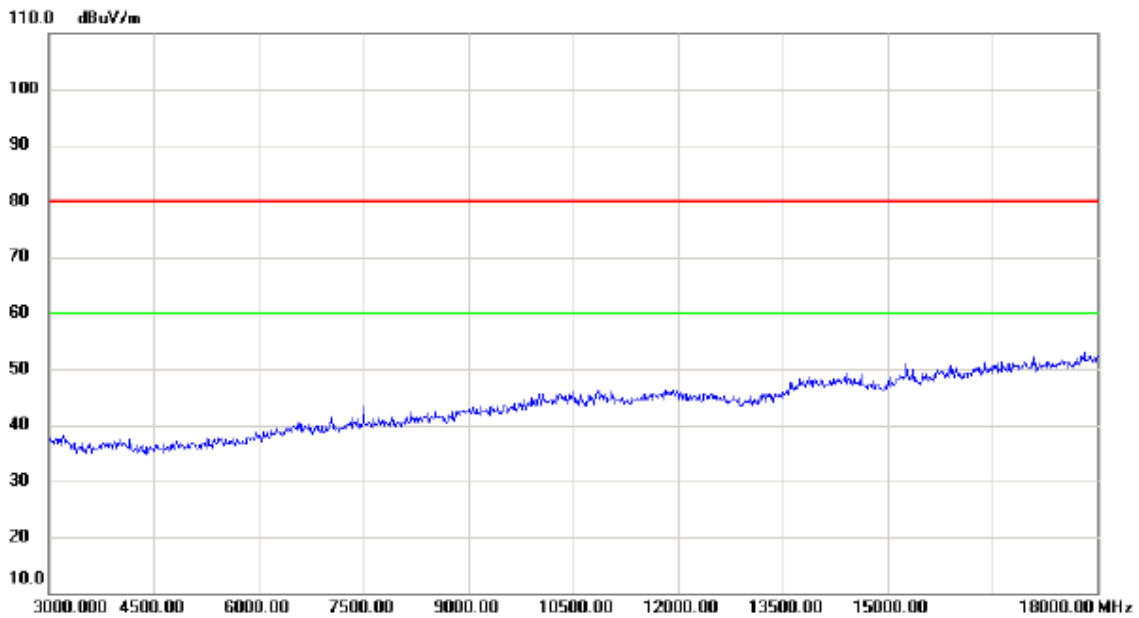

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0


Horizontal

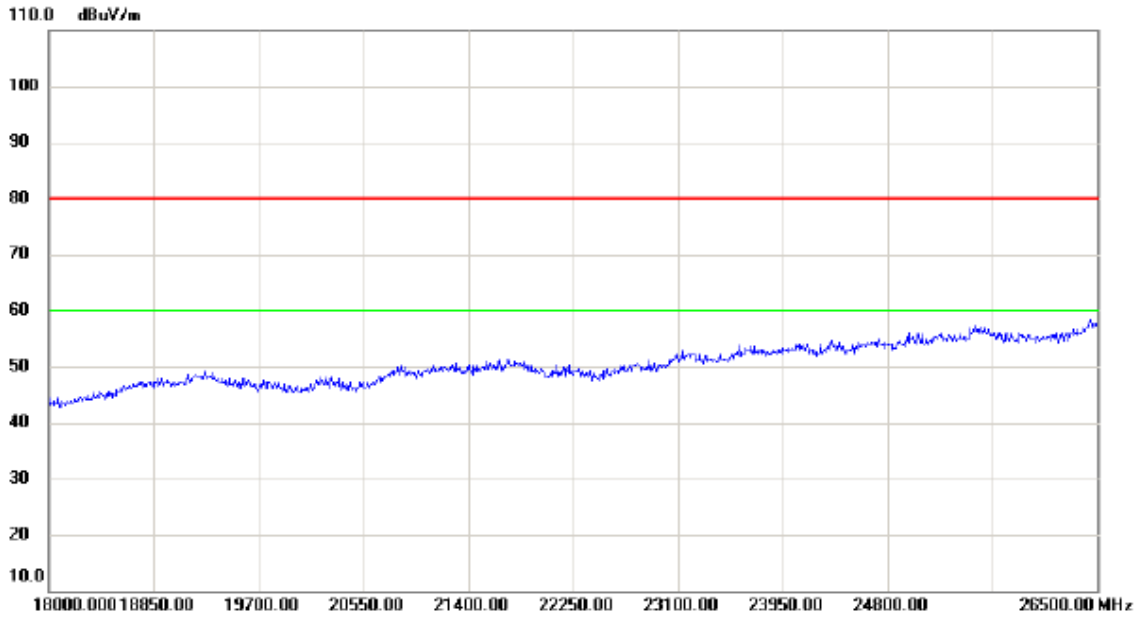

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0


Vertical

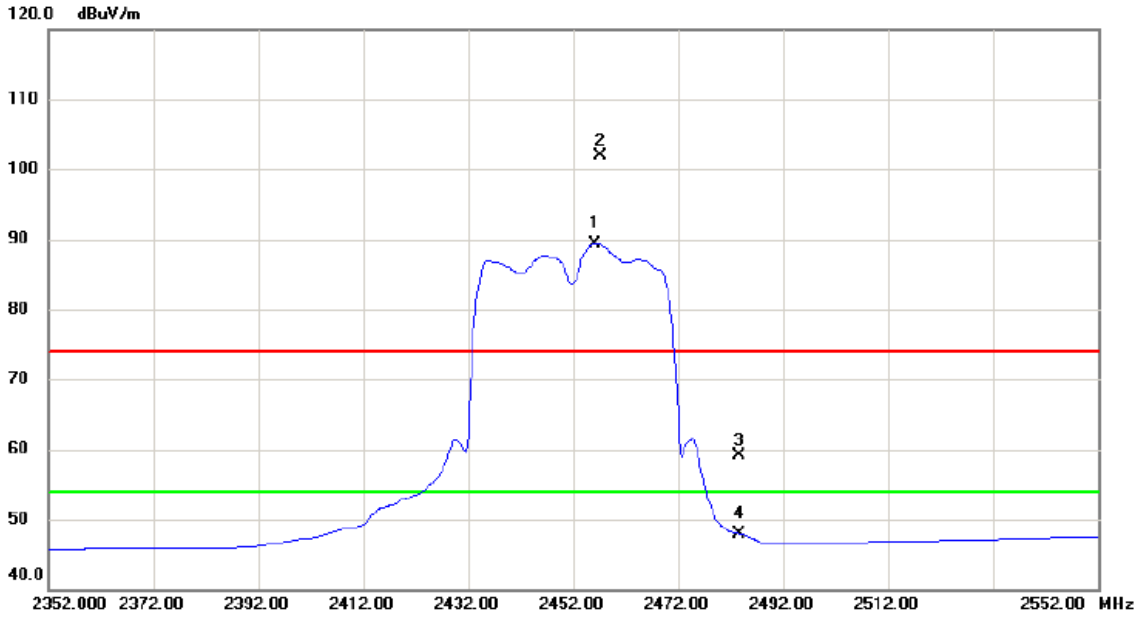


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.000	56.04	33.29	89.33	54.00	35.33	AVG	No Limit
2	X	2457.200	68.58	33.29	101.87	74.00	27.87	peak	No Limit
3		2483.500	25.78	33.40	59.18	74.00	-14.82	peak	
4		2483.500	14.57	33.40	47.97	54.00	-6.03	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0

Vertical

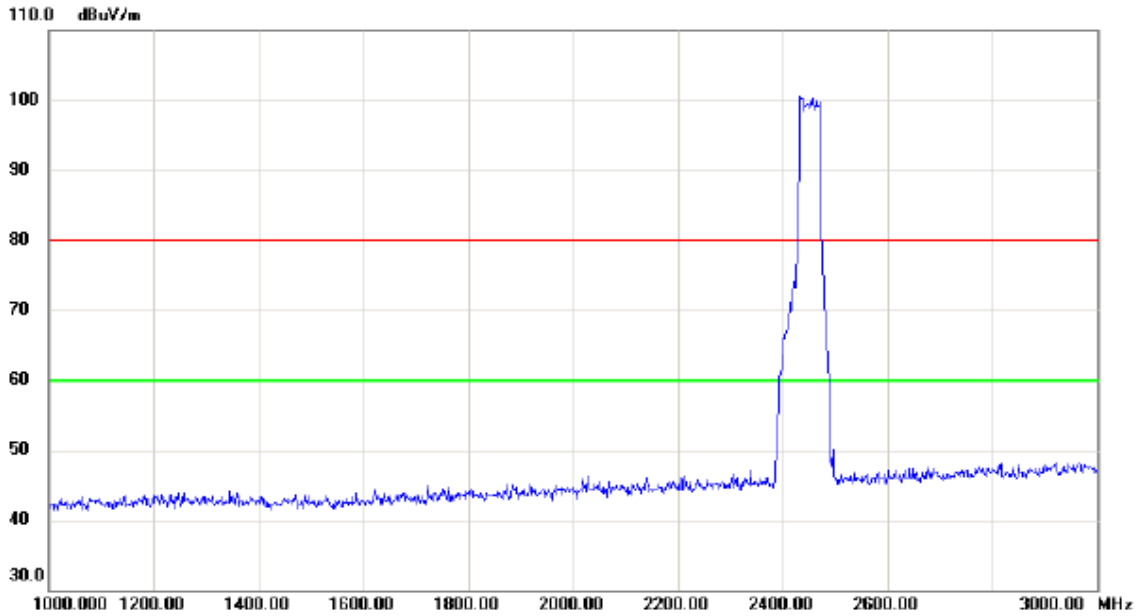


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

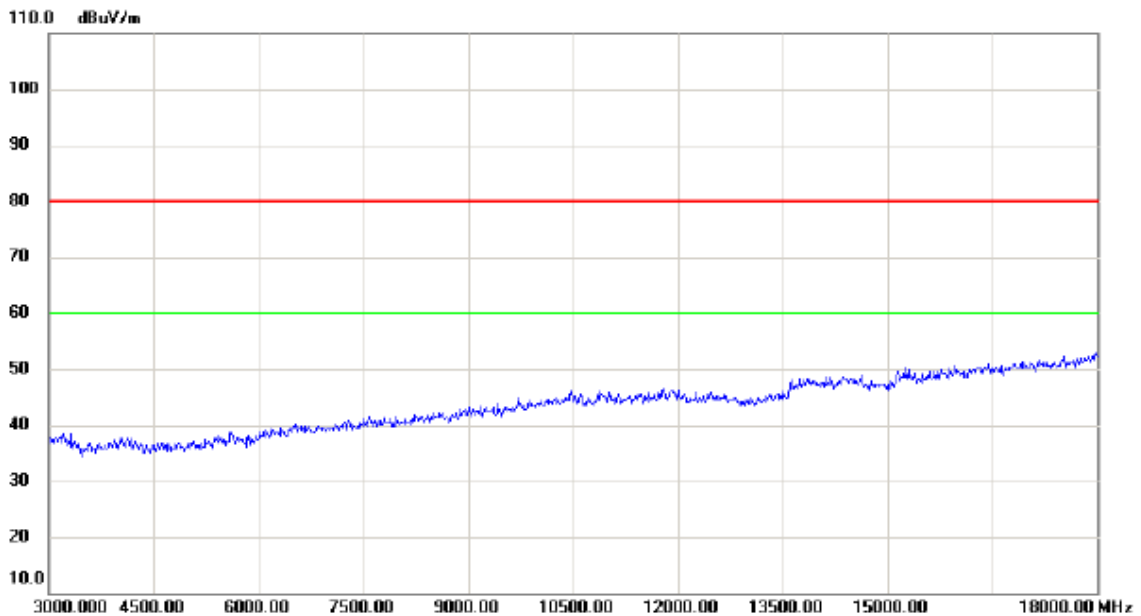

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0


Vertical

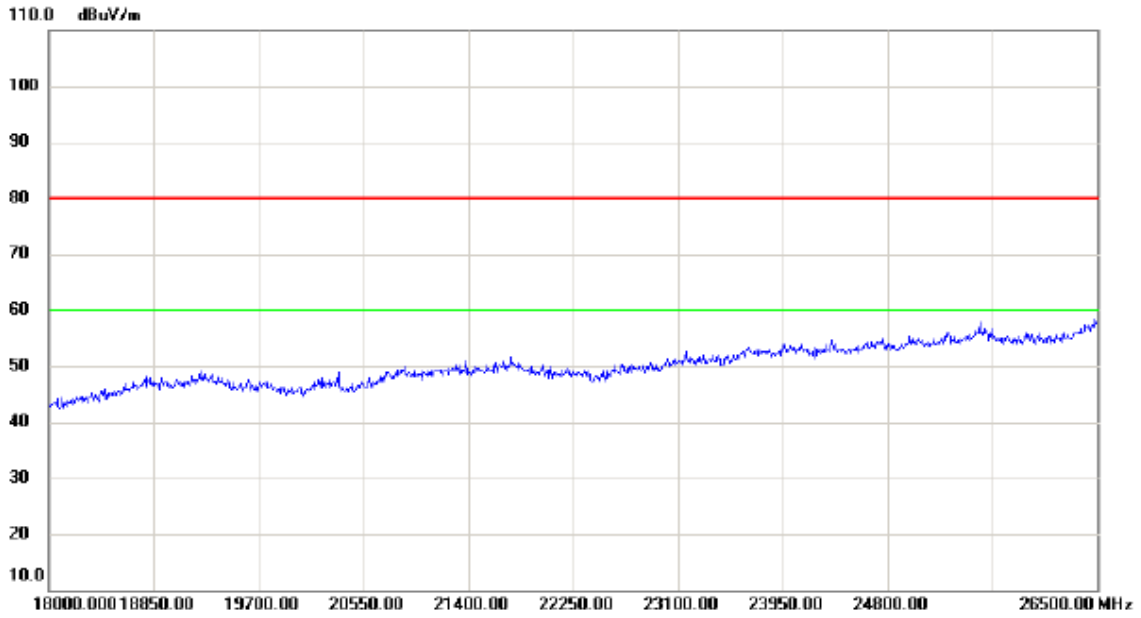

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0


Horizontal

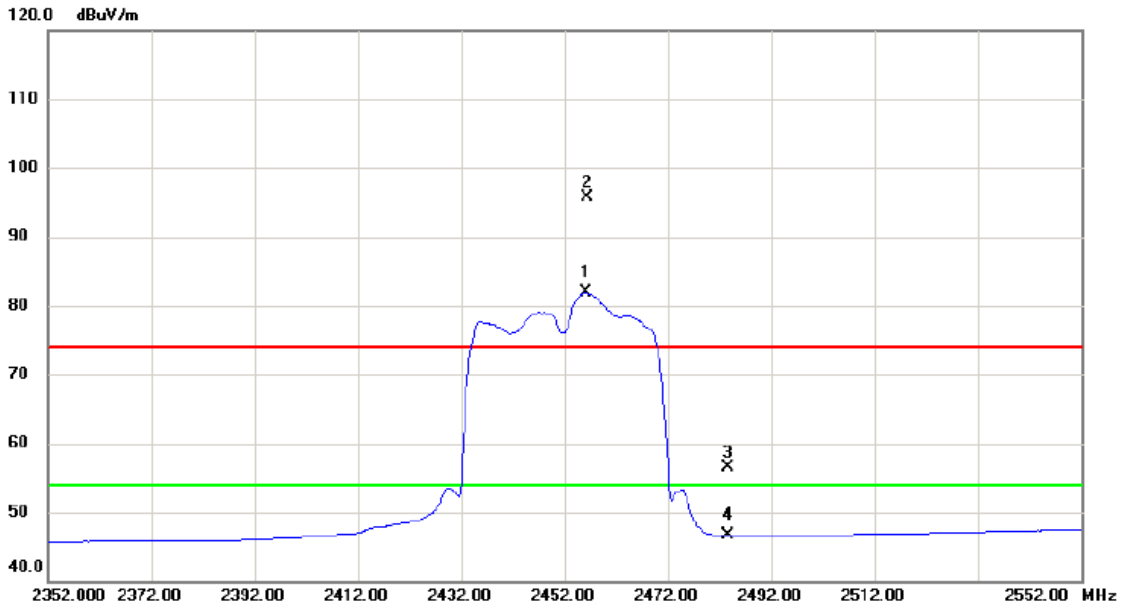


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.000	48.59	33.29	81.88	54.00	27.88	AVG	No Limit
2	X	2456.400	62.51	33.29	95.80	74.00	21.80	peak	No Limit
3		2483.500	23.17	33.40	56.57	74.00	-17.43	peak	
4		2483.500	13.22	33.40	46.62	54.00	-7.38	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0

Horizontal

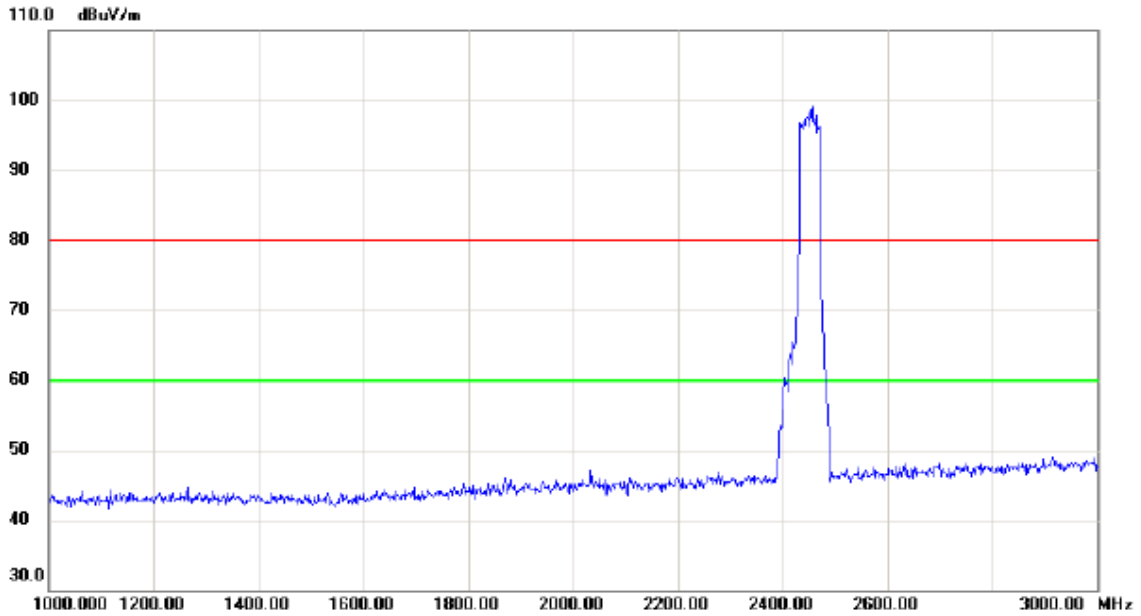


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

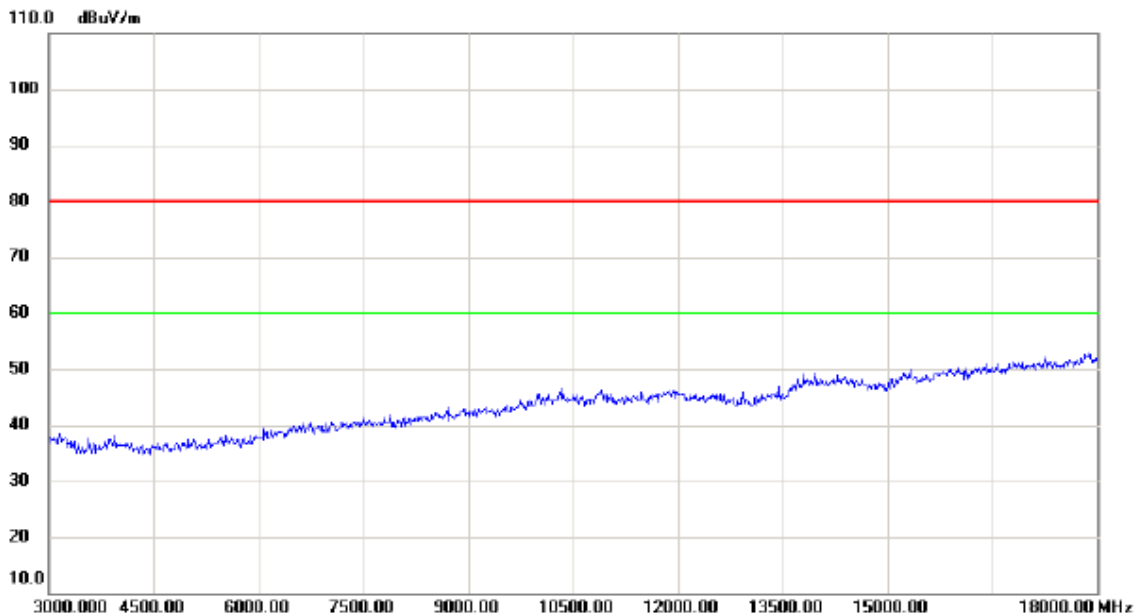

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0


Horizontal

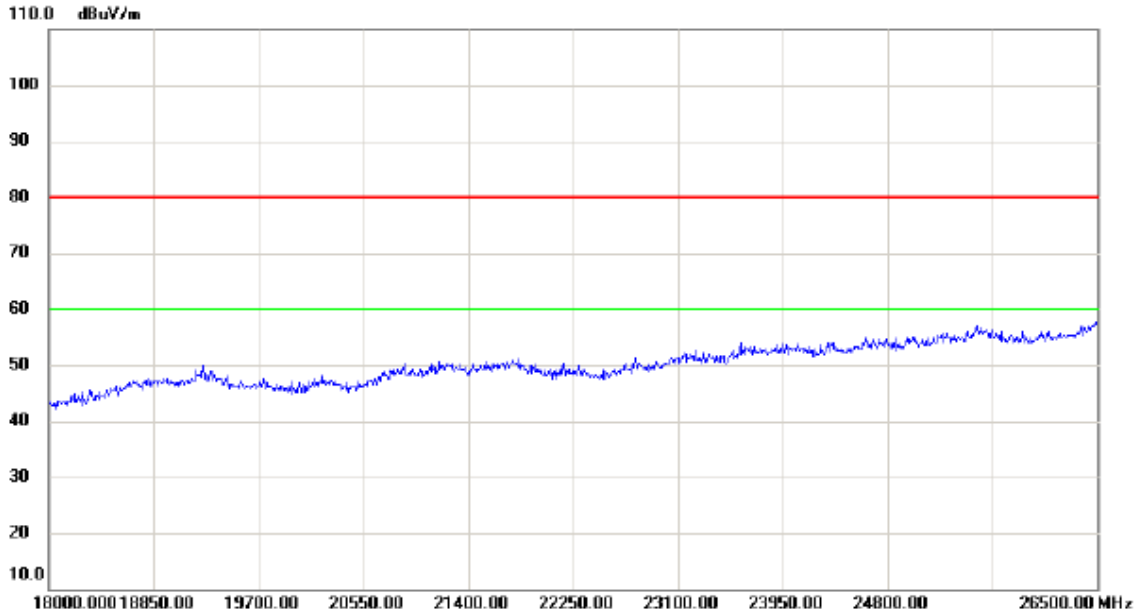

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX B MODE 2432MHz_ANT 1


Vertical

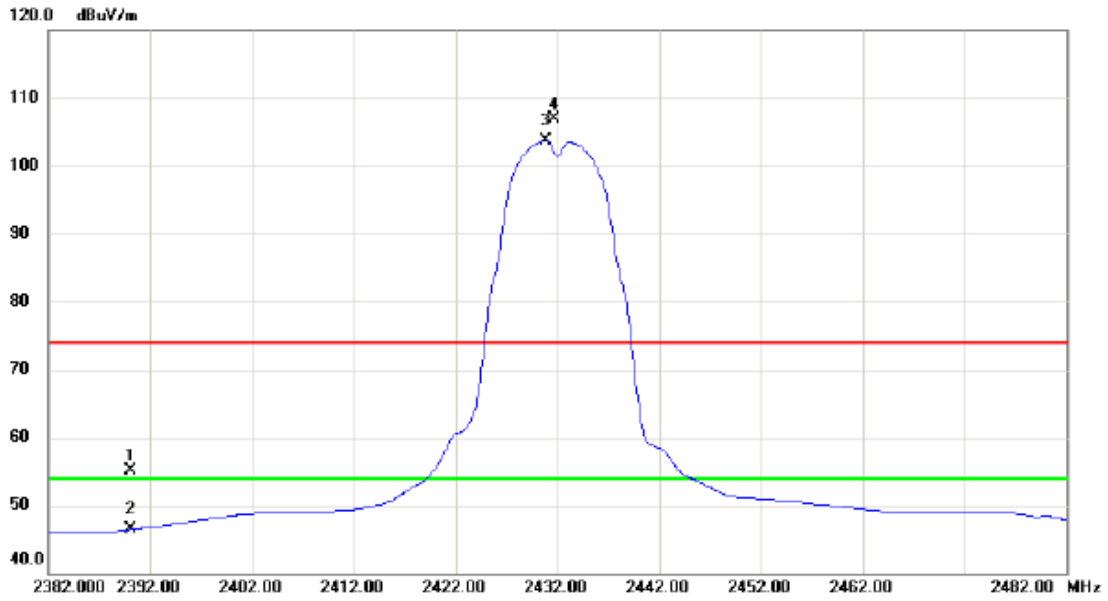


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	22.08	33.01	55.09	74.00	-18.91	peak	
2		2390.000	13.40	33.01	46.41	54.00	-7.59	AVG	
3	*	2430.900	70.57	33.18	103.75	54.00	49.75	AVG	No Limit
4	X	2431.700	73.79	33.18	106.97	74.00	32.97	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2432MHz_ANT 1

Vertical

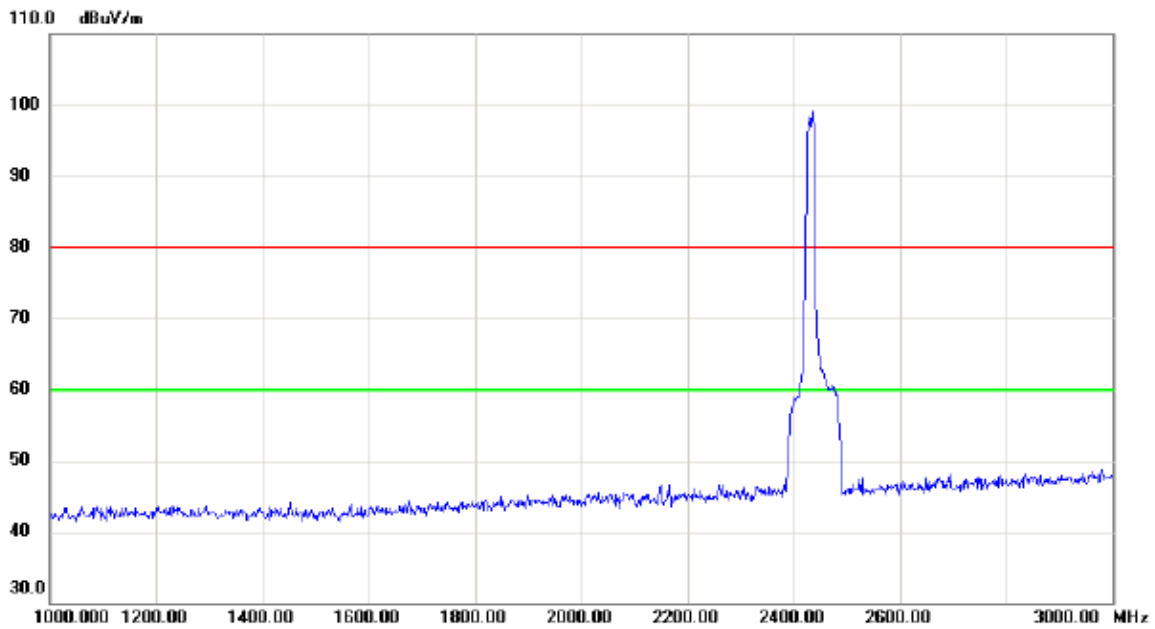


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

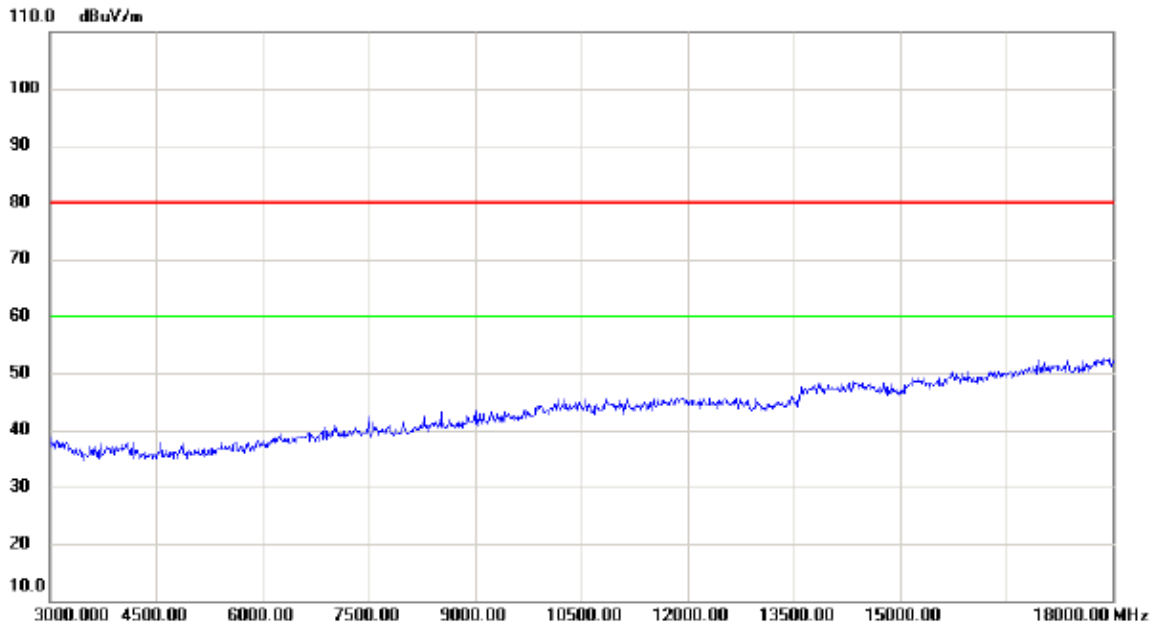

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		


Orthogonal Axis :	X
Test Mode :	TX B MODE 2432MHz_ANT 1

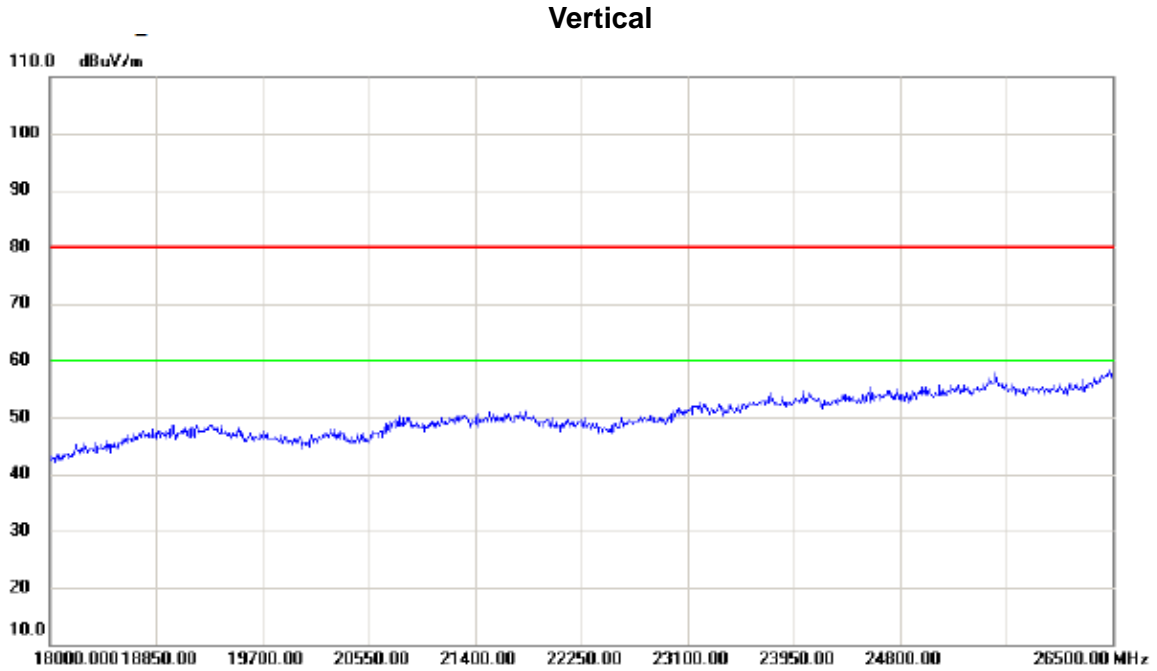

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX B MODE 2432MHz_ANT 1


Horizontal

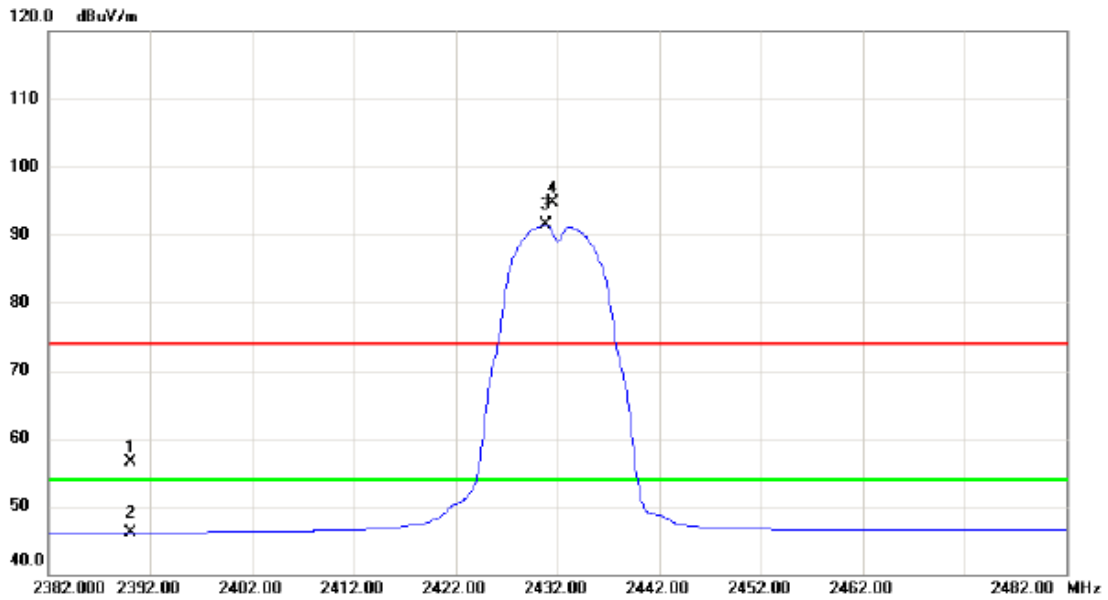


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.56	33.01	56.57	74.00	-17.43	peak	
2		2390.000	13.00	33.01	46.01	54.00	-7.99	AVG	
3	*	2430.900	58.27	33.18	91.45	54.00	37.45	AVG	No Limit
4	X	2431.600	61.44	33.18	94.62	74.00	20.62	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2432MHz_ANT 1

Horizontal

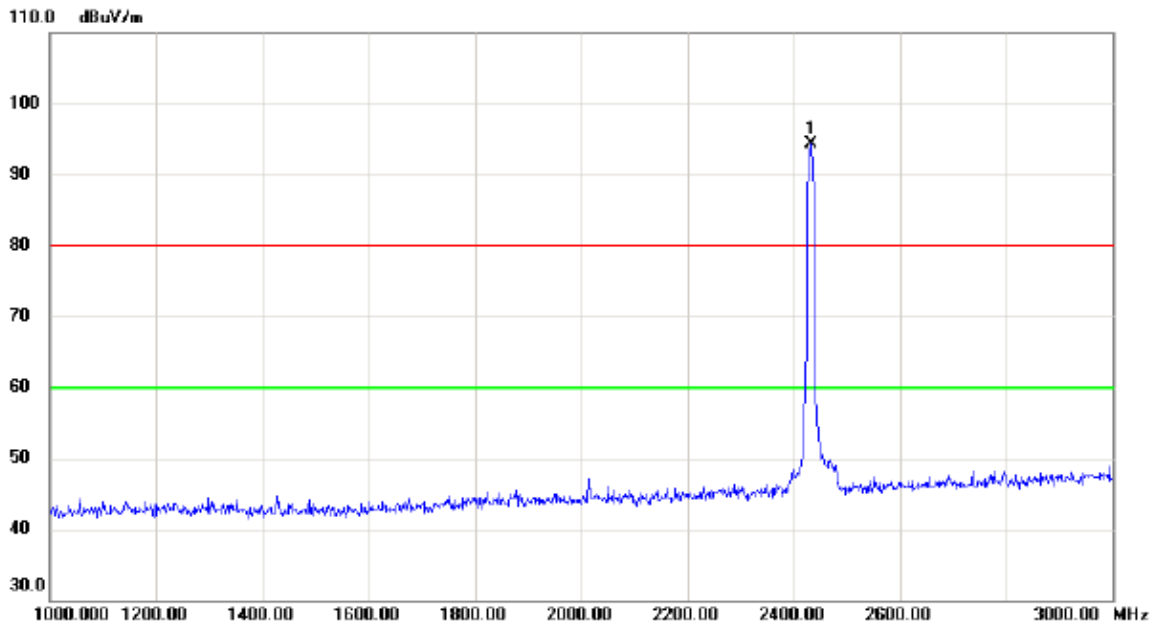


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2432.000	86.42	7.82	94.24	80.00	14.24	peak	

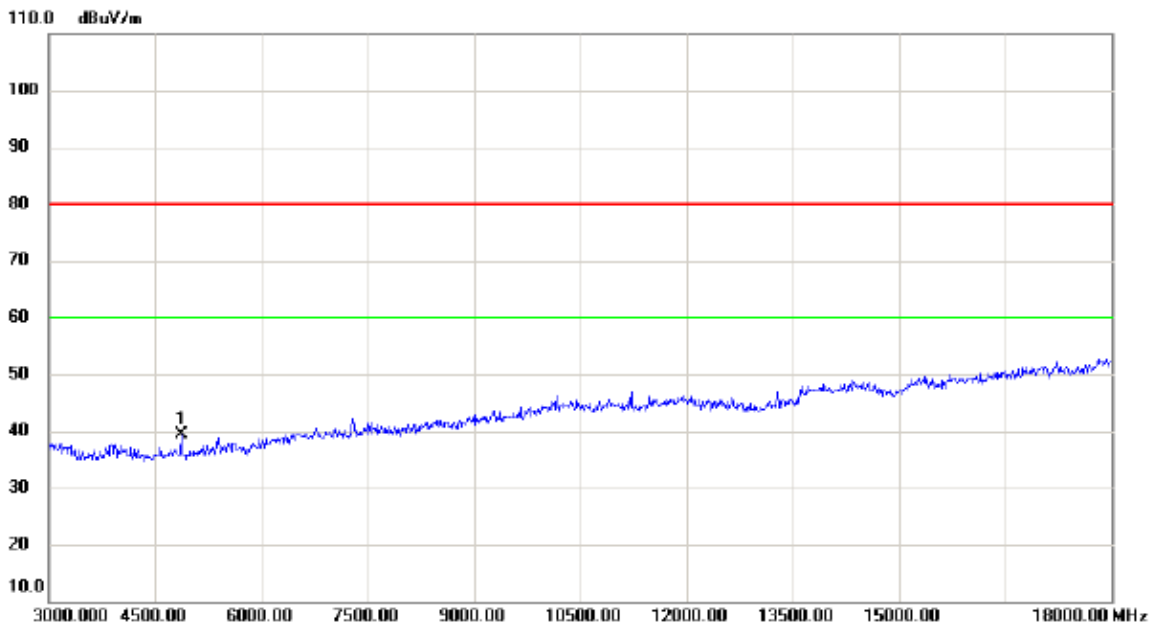

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4860.000	36.28	3.19	39.47	80.00	-40.53	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2432MHz_ANT 1


Horizontal

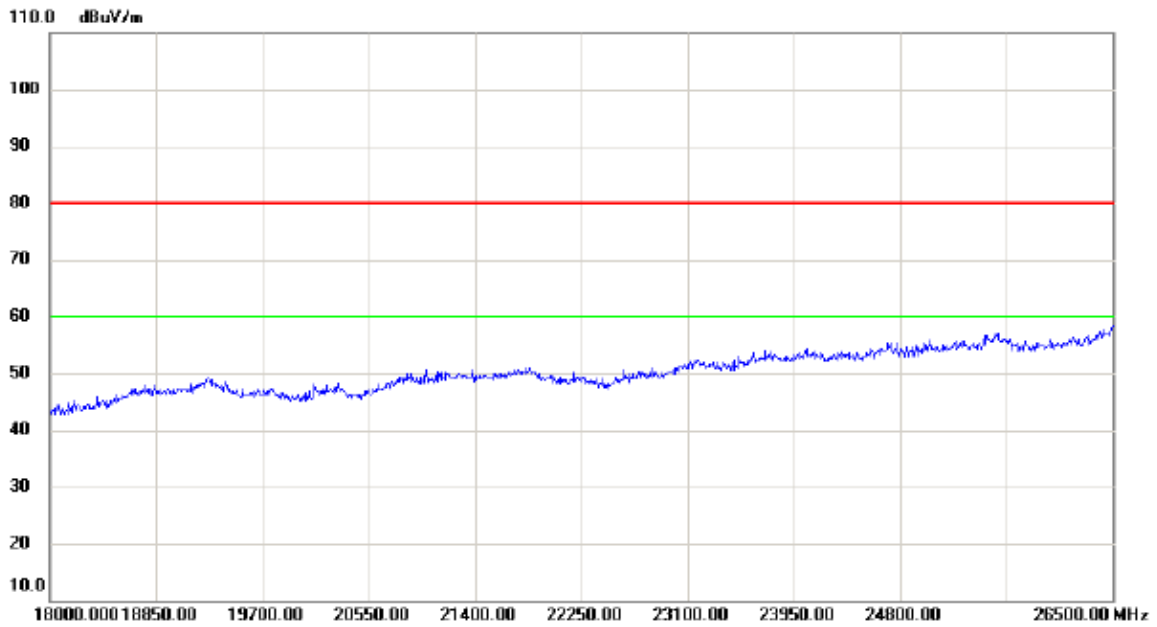

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz_ANT 1


Vertical

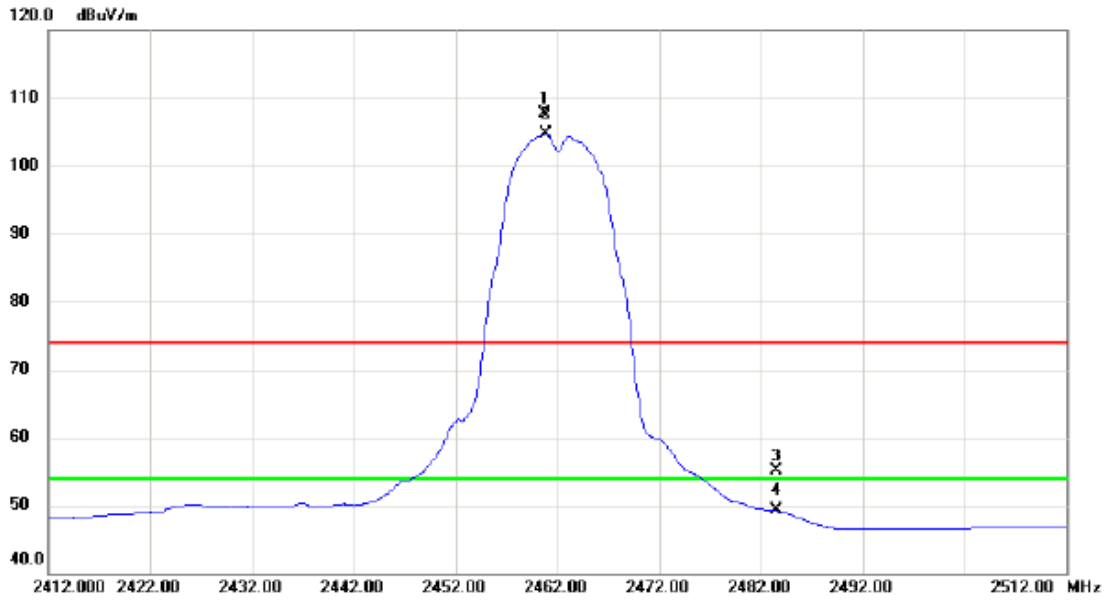


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.681	74.47	33.30	107.77	74.00	33.77	peak	No Limit
2	*	2460.900	71.38	33.30	104.68	54.00	50.68	AVG	No Limit
3		2483.500	21.68	33.40	55.08	74.00	-18.92	peak	
4		2483.500	15.84	33.40	49.24	54.00	-4.76	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz_ANT 1

Vertical

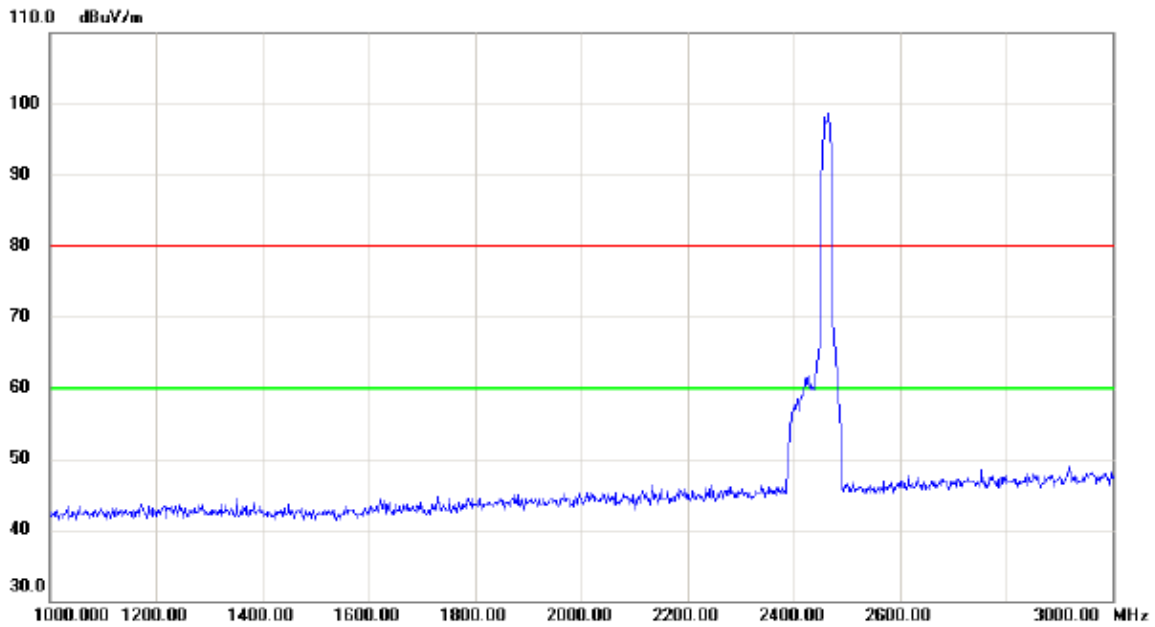


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

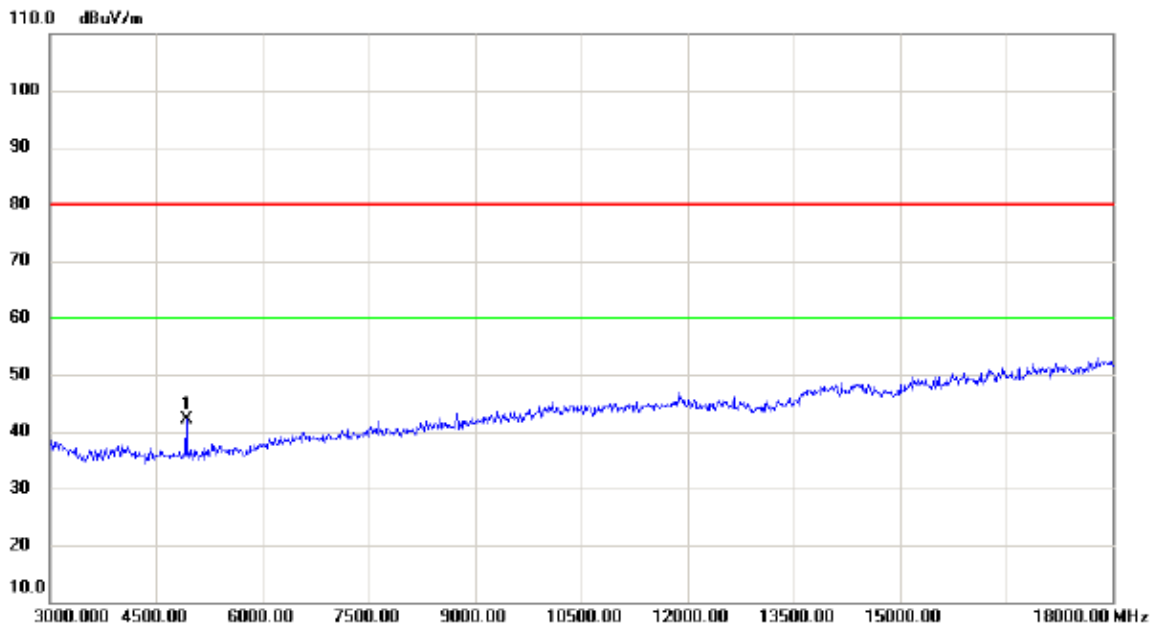

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4920.000	38.71	3.38	42.09	80.00	-37.91	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz_ANT 1


Vertical

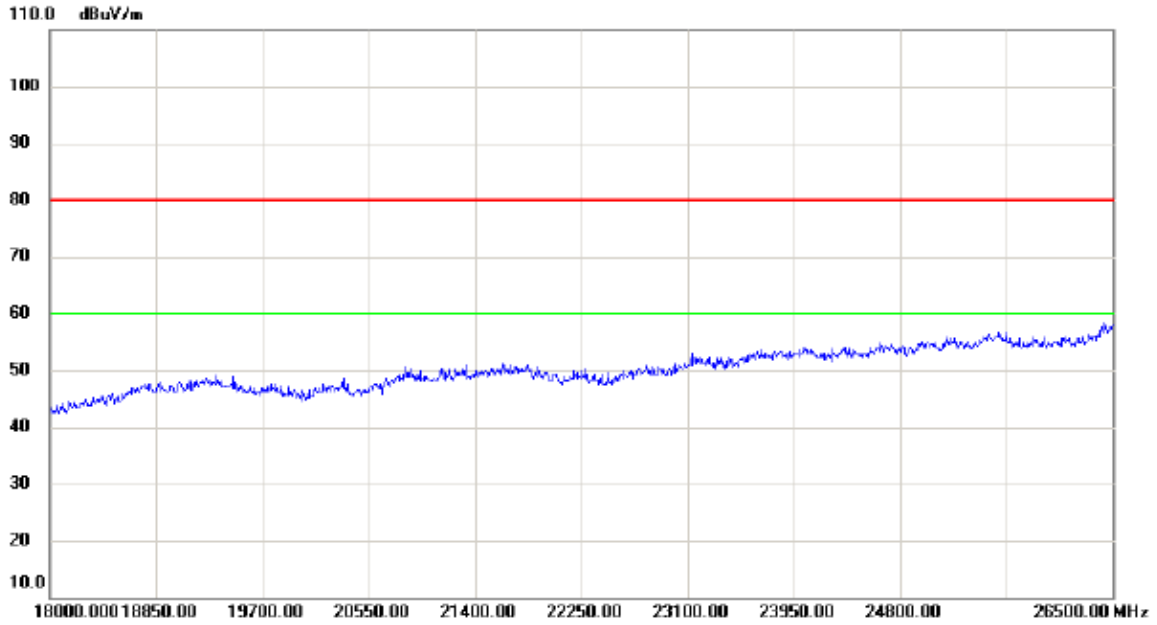

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz_ANT 1


Horizontal

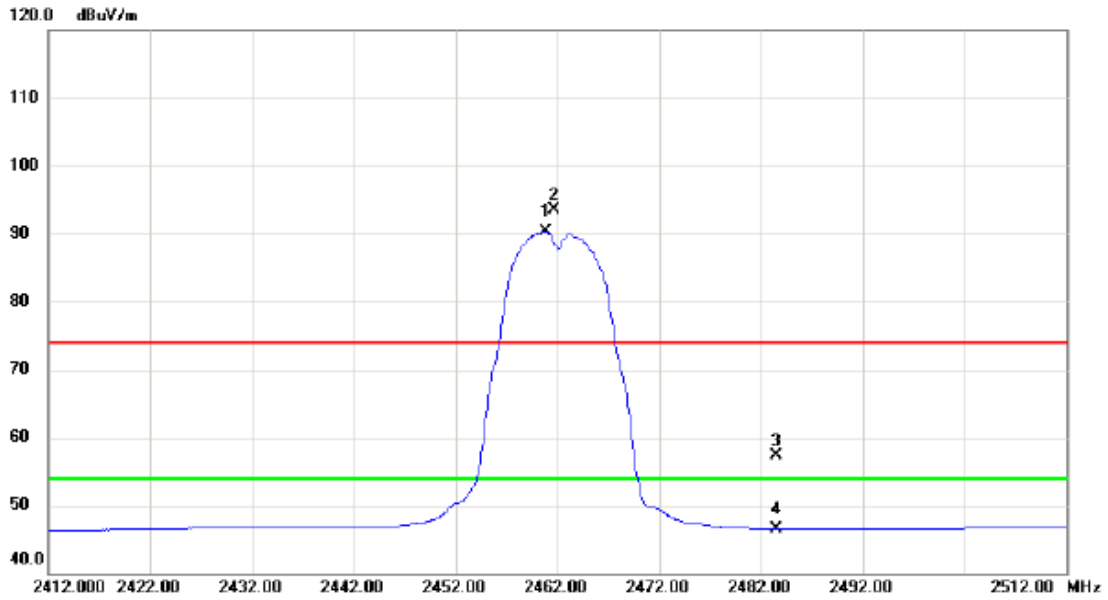


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2460.800	57.04	33.30	90.34	54.00	36.34	AVG	No Limit
2	X	2461.700	60.22	33.31	93.53	74.00	19.53	peak	No Limit
3		2483.500	23.92	33.40	57.32	74.00	-16.68	peak	
4		2483.500	13.16	33.40	46.56	54.00	-7.44	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz_ANT 1

Horizontal

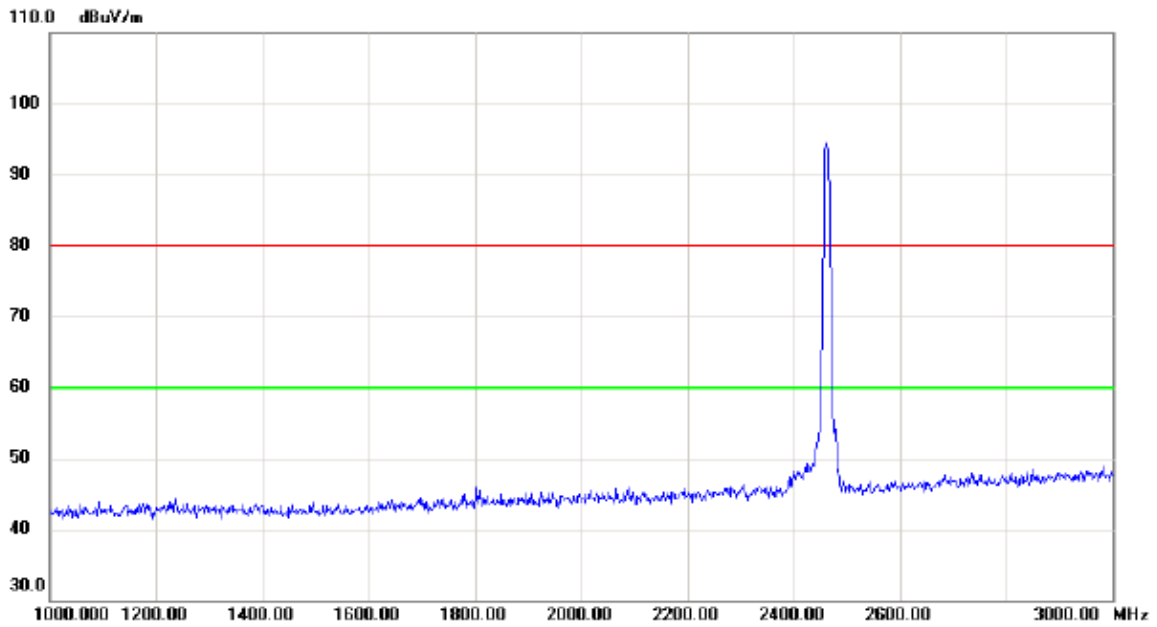


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

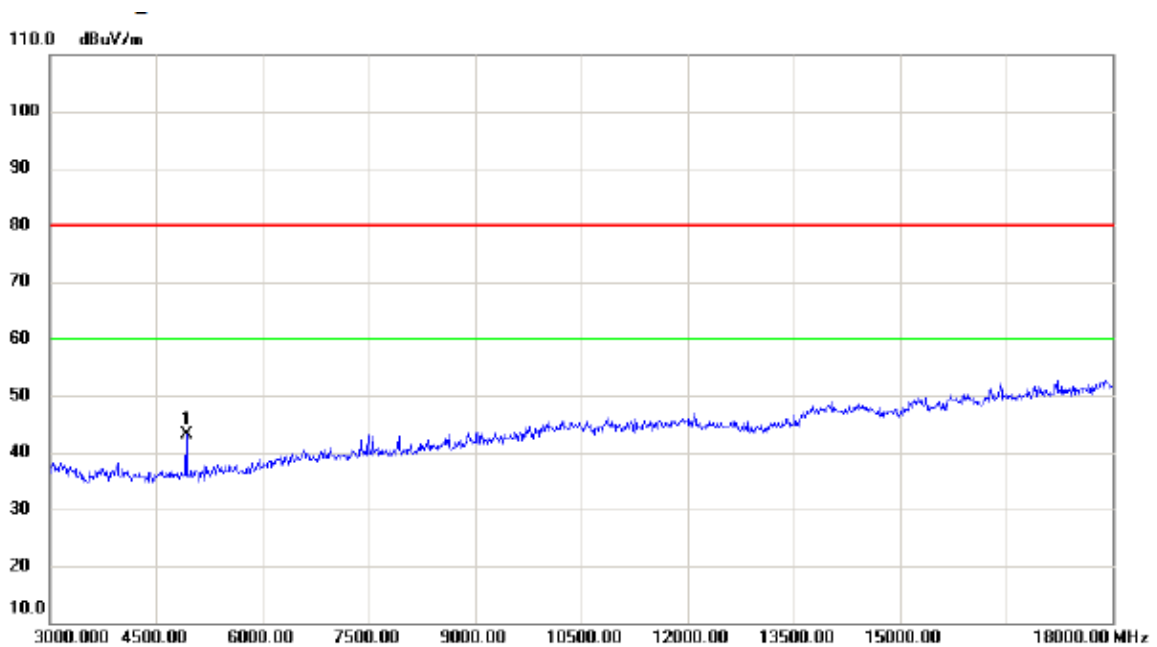

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4920.000	39.70	3.38	43.08	80.00	-36.92	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz_ANT 1


Horizontal

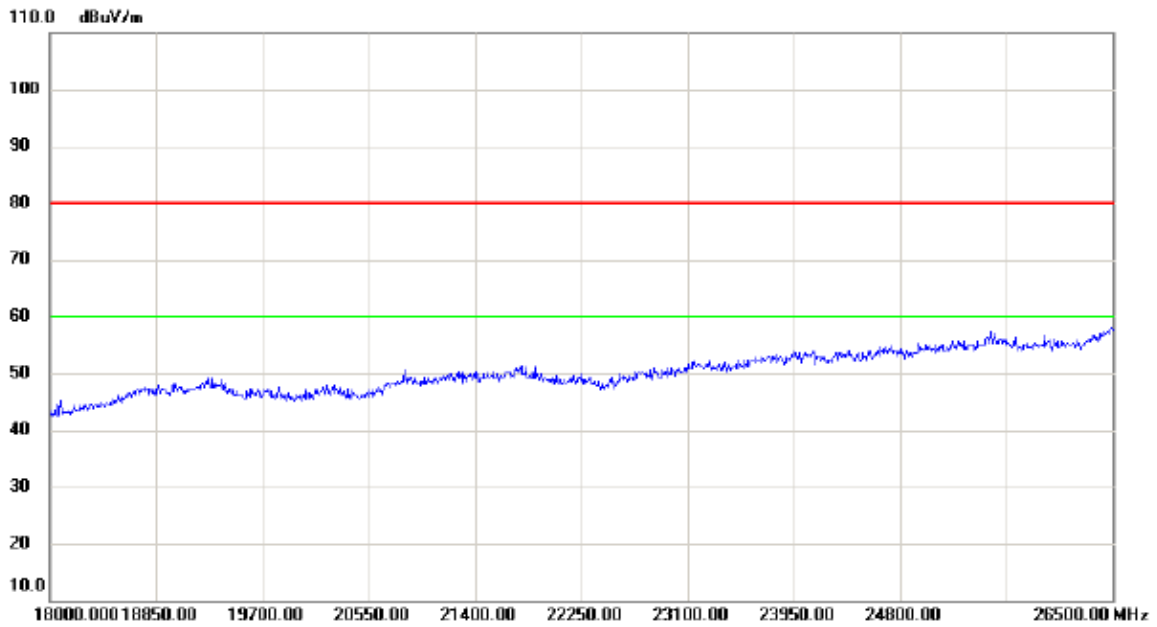

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX G MODE 2432MHz_ANT 1


Vertical

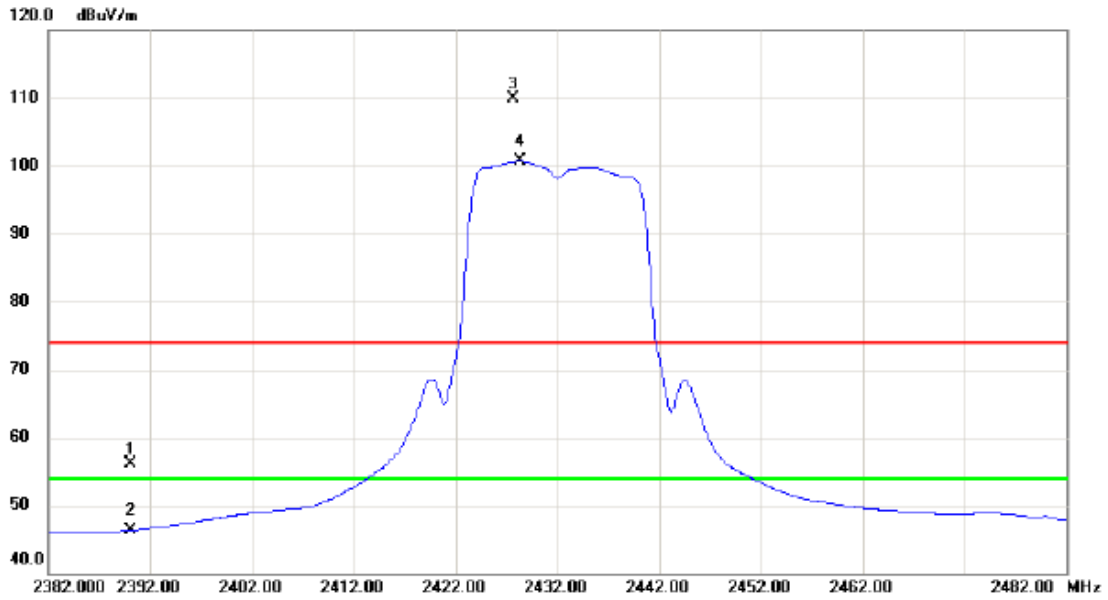


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.11	33.01	56.12	74.00	-17.88	peak	
2		2390.000	13.31	33.01	46.32	54.00	-7.68	AVG	
3	X	2427.700	76.66	33.17	109.83	74.00	35.83	peak	No Limit
4	*	2428.300	67.47	33.17	100.64	54.00	46.64	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2432MHz_ANT 1

Vertical

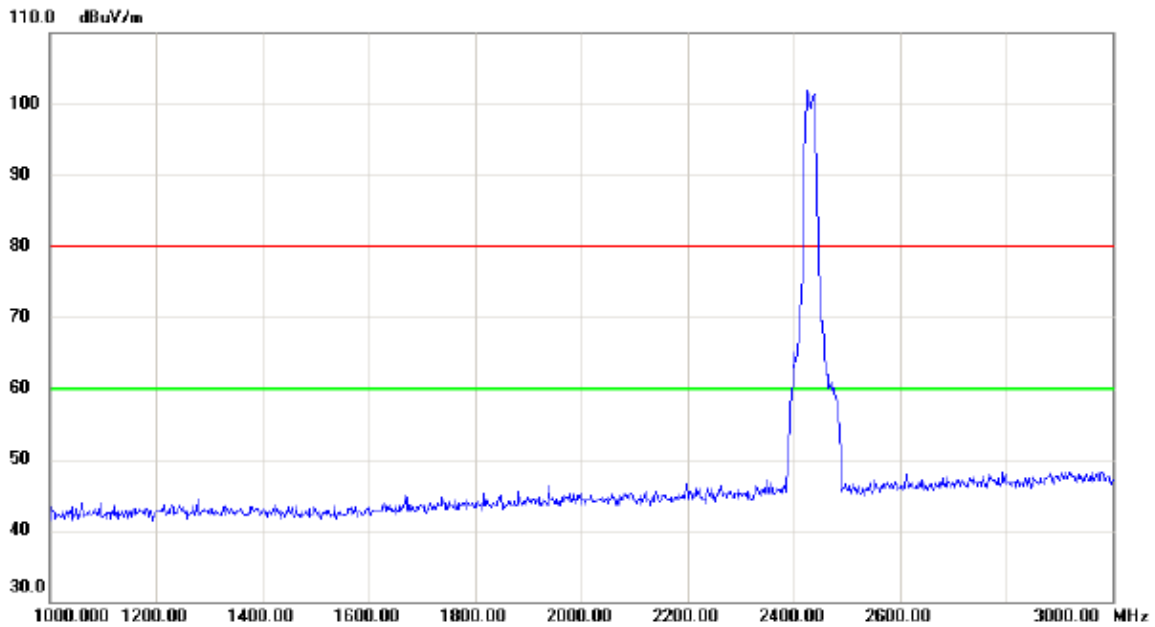


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

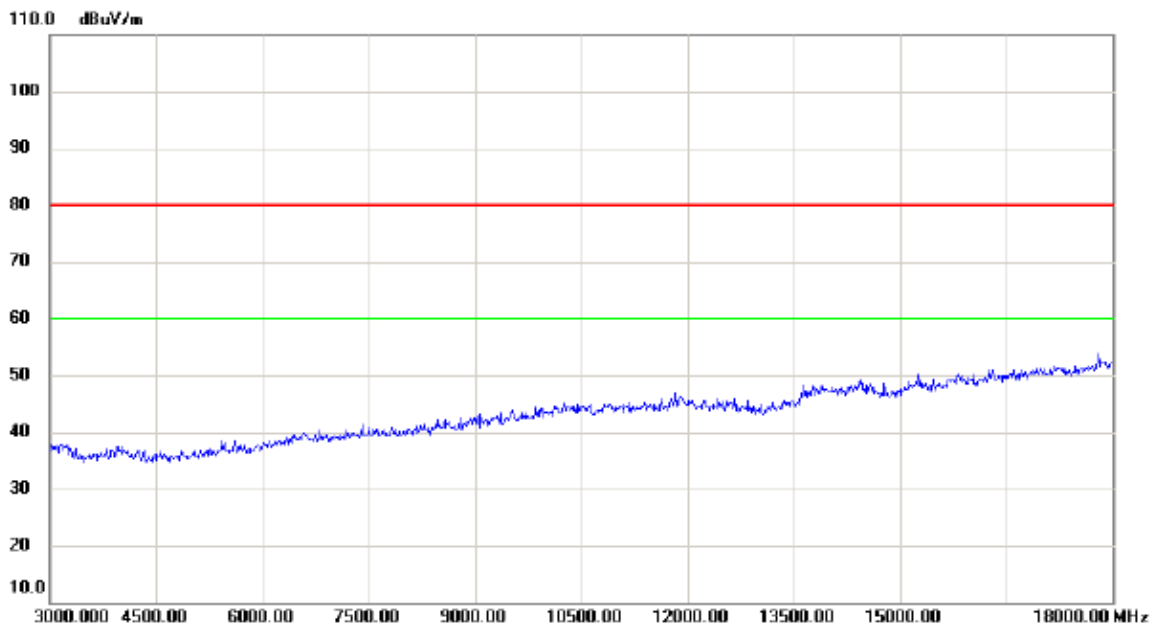

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		


Orthogonal Axis :	X
Test Mode :	TX G MODE 2432MHz_ANT 1

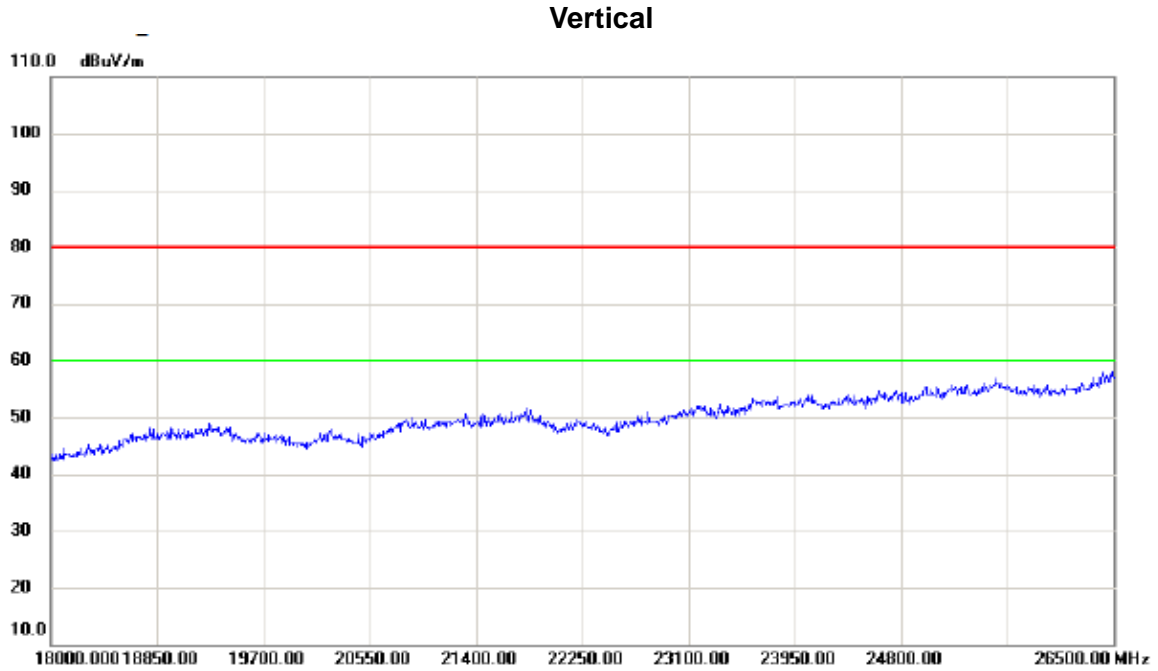

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX G MODE 2432MHz_ANT 1


Horizontal

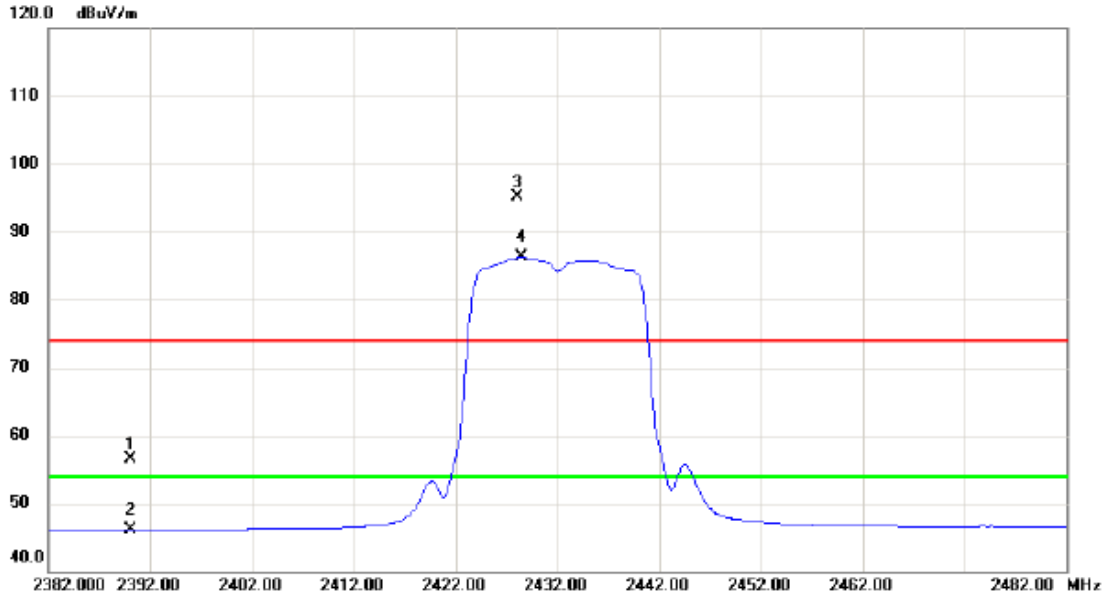


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.48	33.01	56.49	74.00	-17.51	peak	
2		2390.000	13.02	33.01	46.03	54.00	-7.97	AVG	
3	X	2428.000	61.99	33.17	95.16	74.00	21.16	peak	No Limit
4	*	2428.500	53.07	33.17	86.24	54.00	32.24	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2432MHz_ANT 1

Horizontal

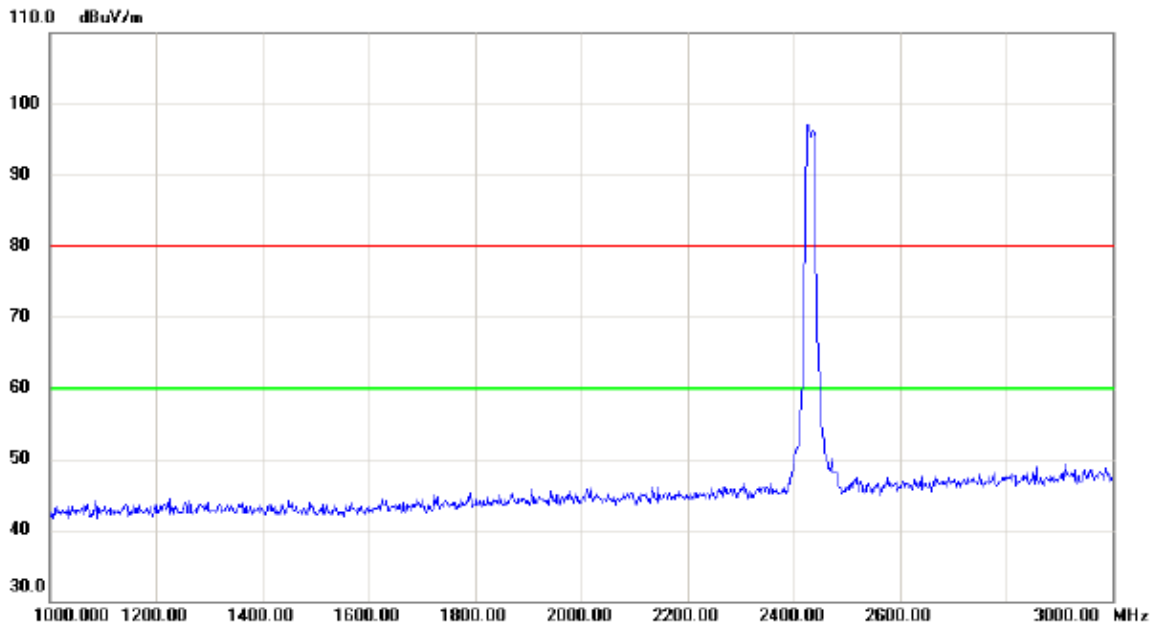


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

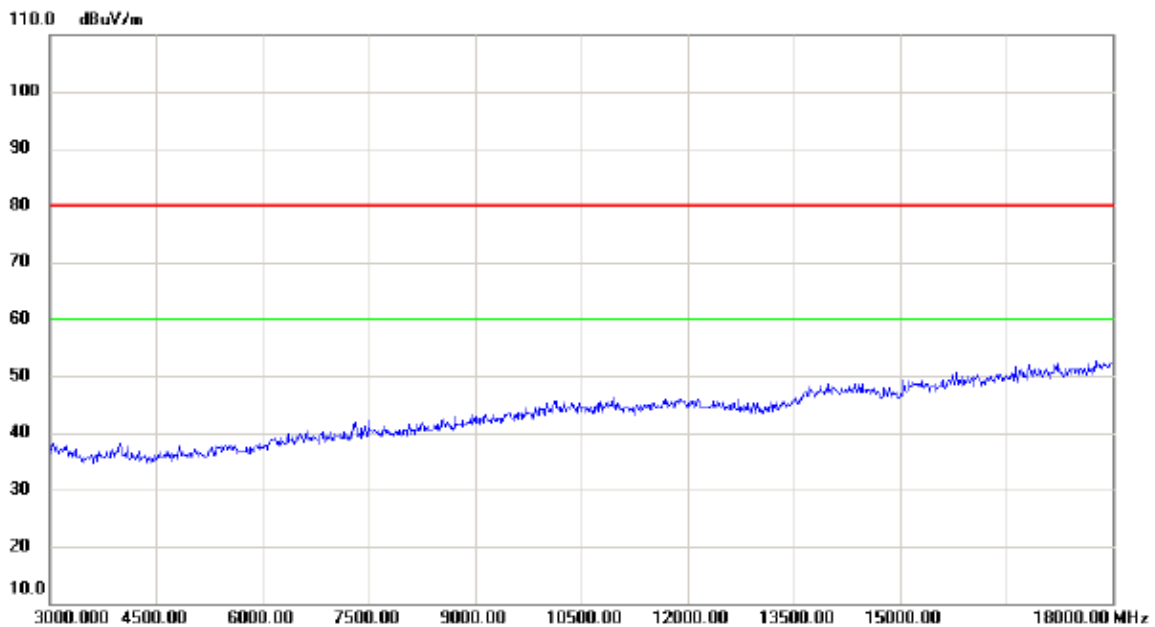

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX G MODE 2432MHz_ANT 1


Horizontal

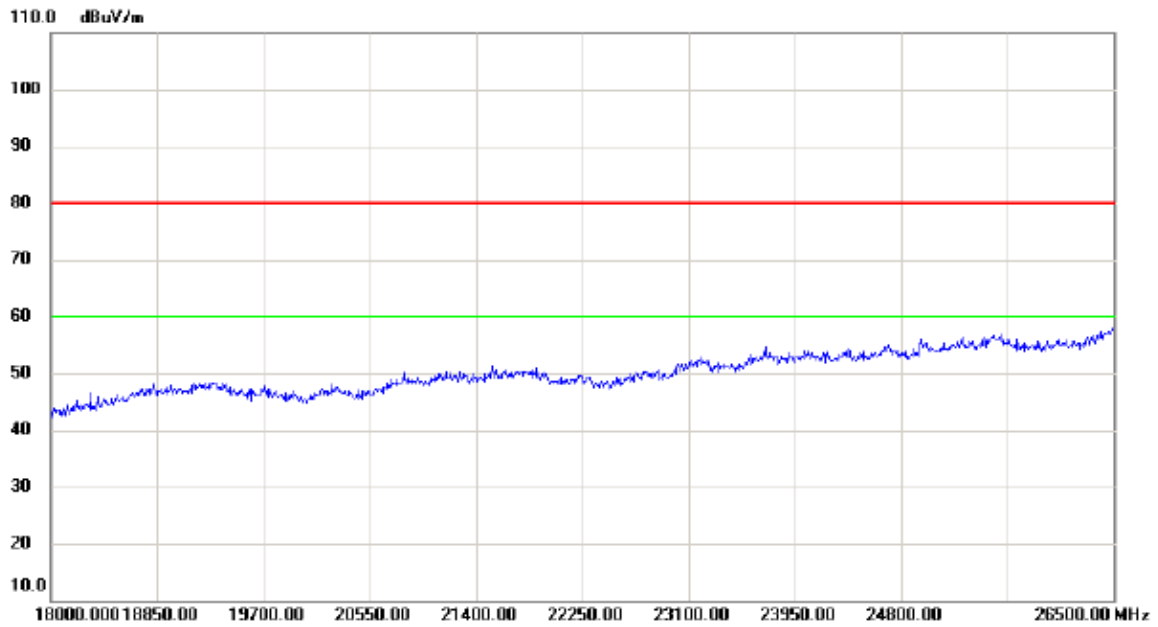

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz_ANT 1


Vertical

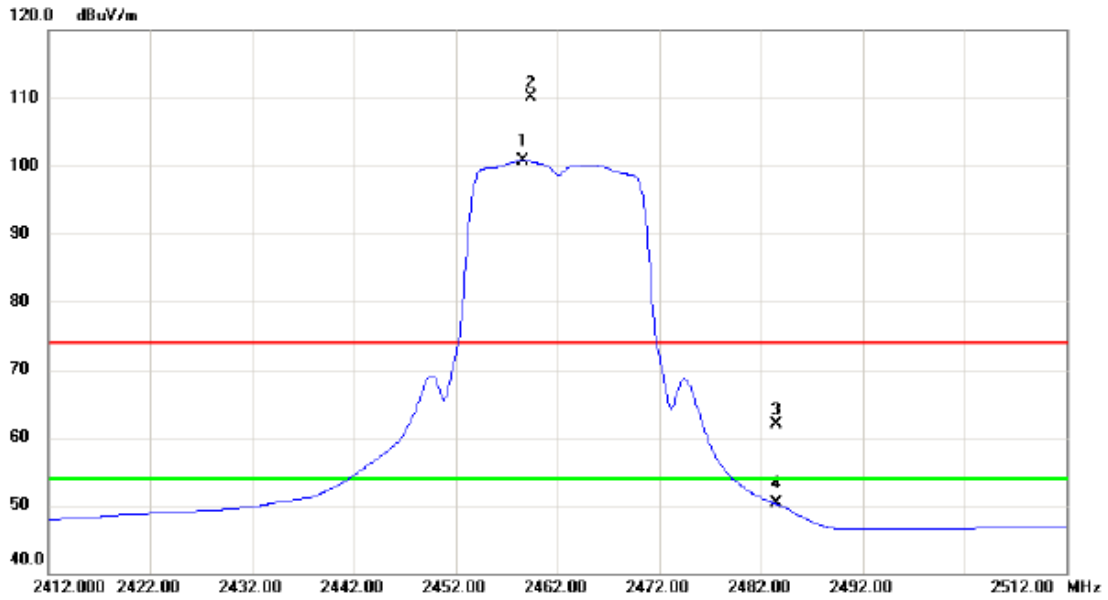


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2458.600	67.41	33.30	100.71	54.00	46.71	AVG	No Limit
2	X	2459.400	76.83	33.30	110.13	74.00	36.13	peak	No Limit
3		2483.500	28.58	33.40	61.98	74.00	-12.02	peak	
4		2483.500	16.83	33.40	50.23	54.00	-3.77	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz_ANT 1

Vertical

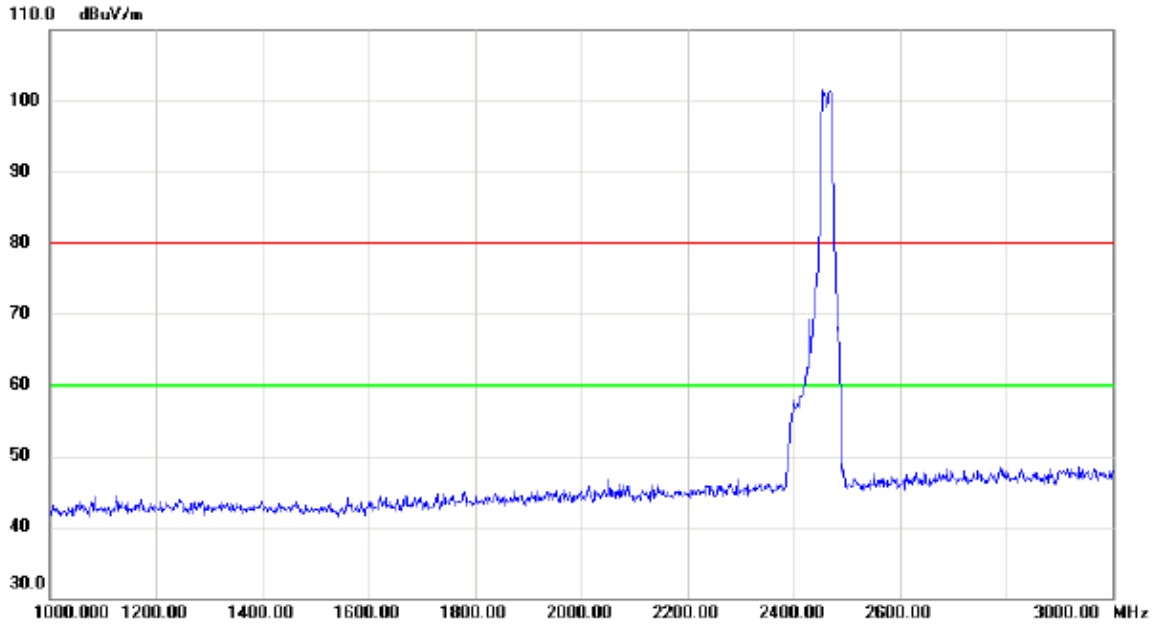


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

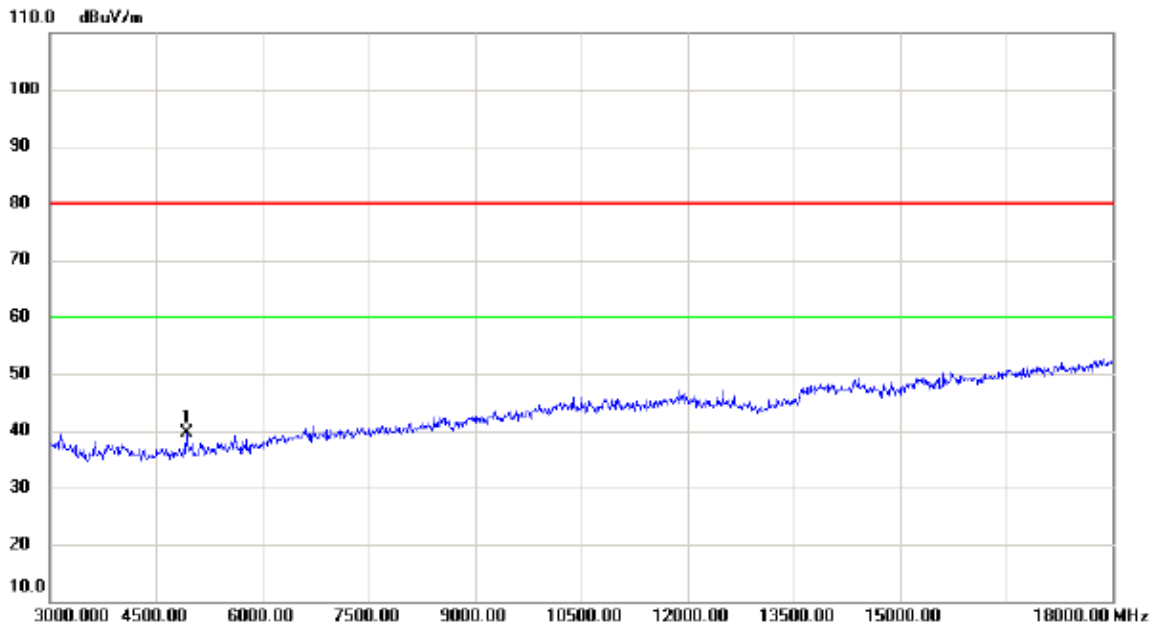

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4920.000	36.36	3.38	39.74	80.00	-40.26	peak	


Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz_ANT 1

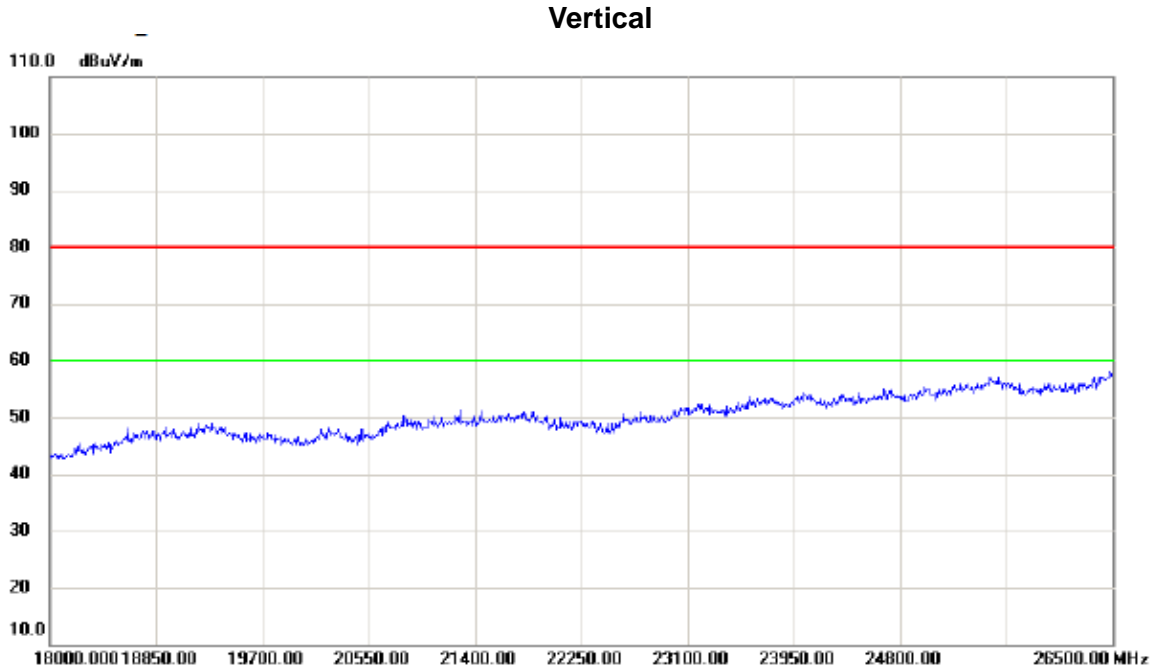

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz_ANT 1


Horizontal

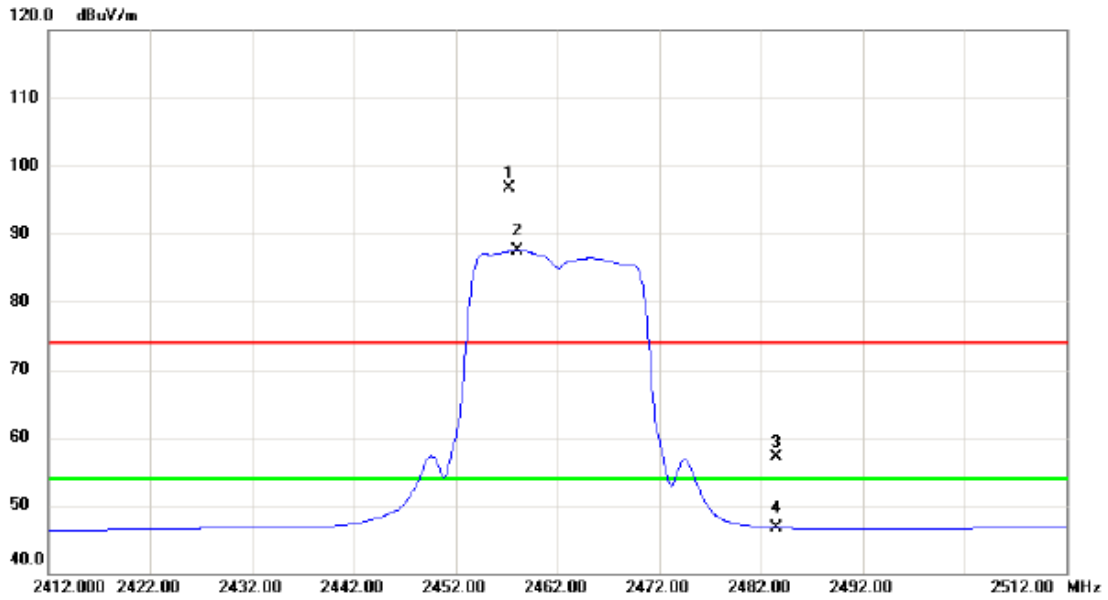


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2457.300	63.50	33.29	96.79	74.00	22.79	peak	No Limit
2	*	2458.100	54.26	33.30	87.56	54.00	33.56	AVG	No Limit
3		2483.500	23.62	33.40	57.02	74.00	-16.98	peak	
4		2483.500	13.32	33.40	46.72	54.00	-7.28	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz_ANT 1

Horizontal

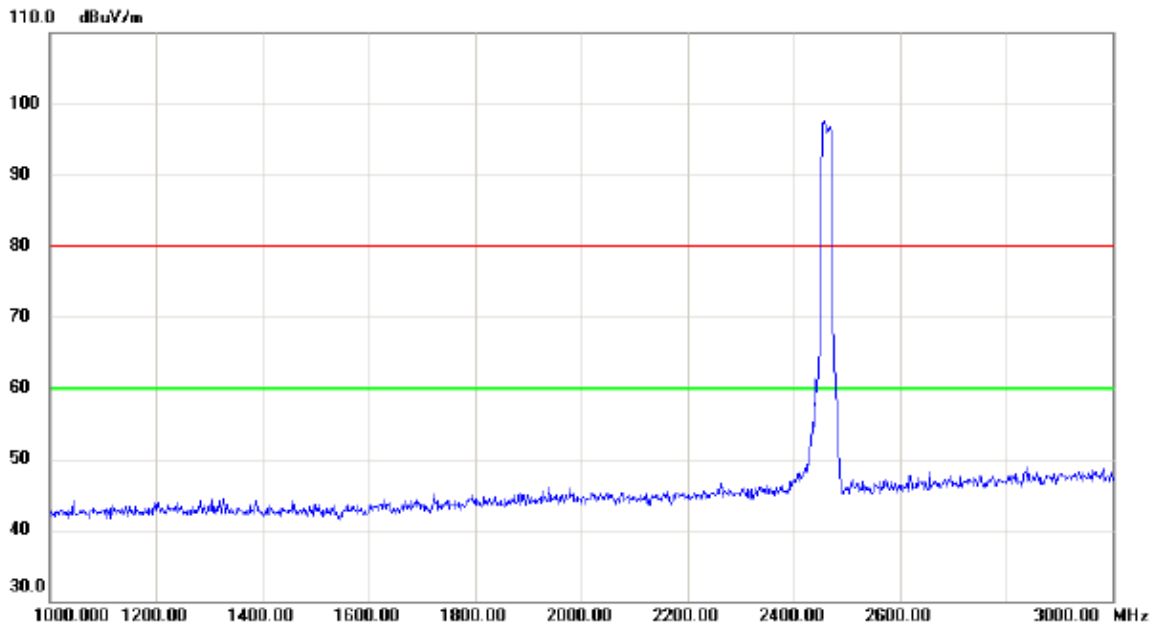


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

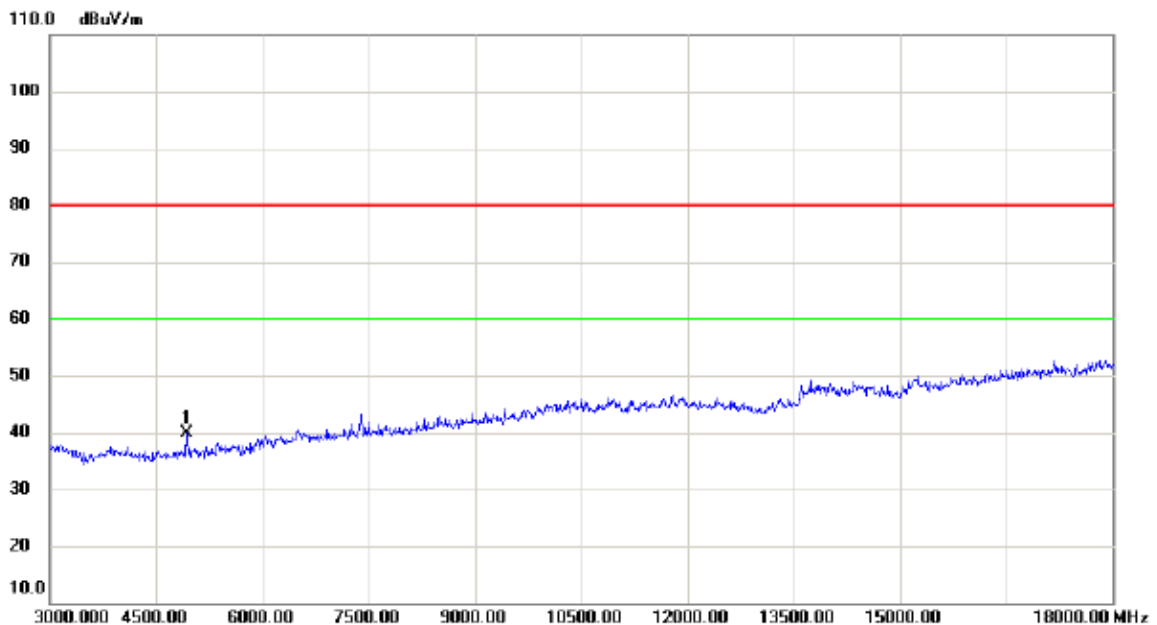

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4920.000	36.57	3.38	39.95	80.00	-40.05	peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz_ANT 1


Horizontal

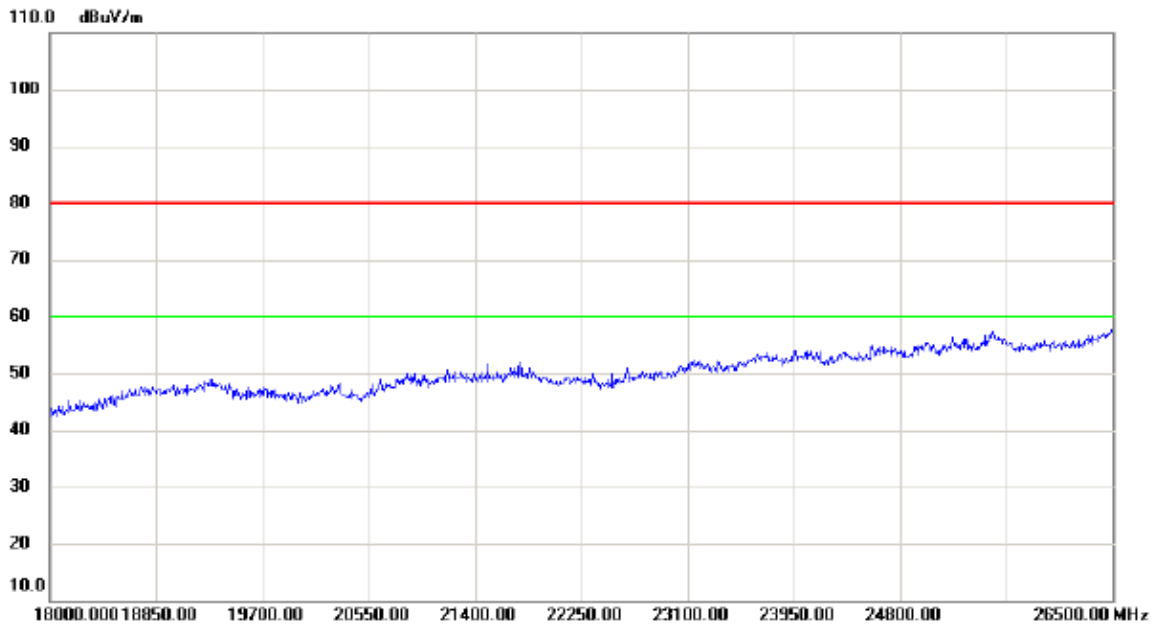

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 1


Vertical

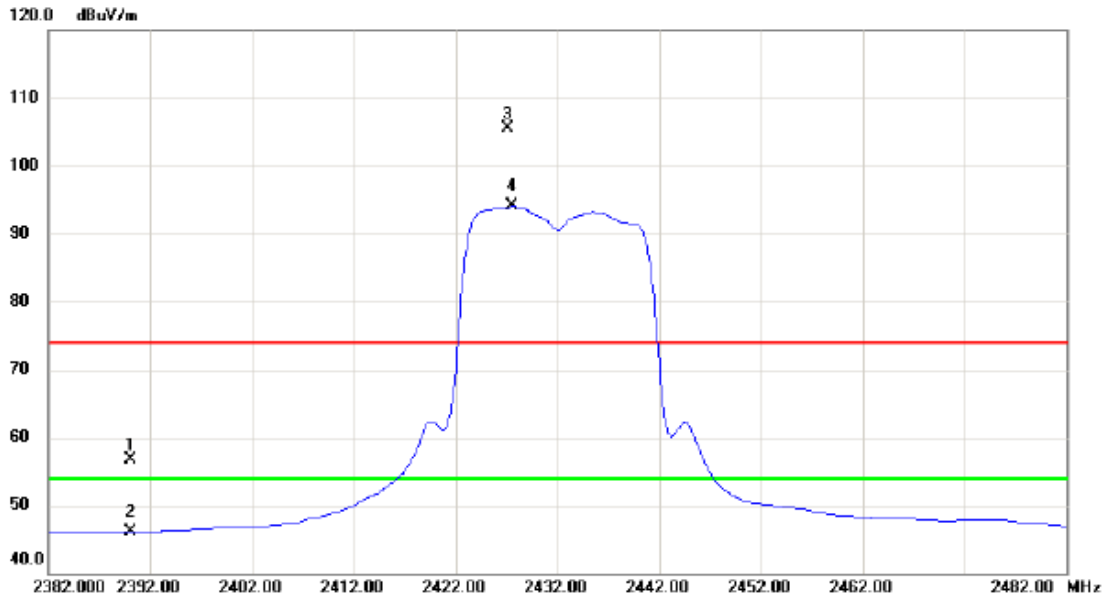


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.65	33.01	56.66	74.00	-17.34	peak	
2		2390.000	13.06	33.01	46.07	54.00	-7.93	AVG	
3	X	2427.200	72.33	33.17	105.50	74.00	31.50	peak	No Limit
4	*	2427.600	60.85	33.17	94.02	54.00	40.02	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 1

Vertical

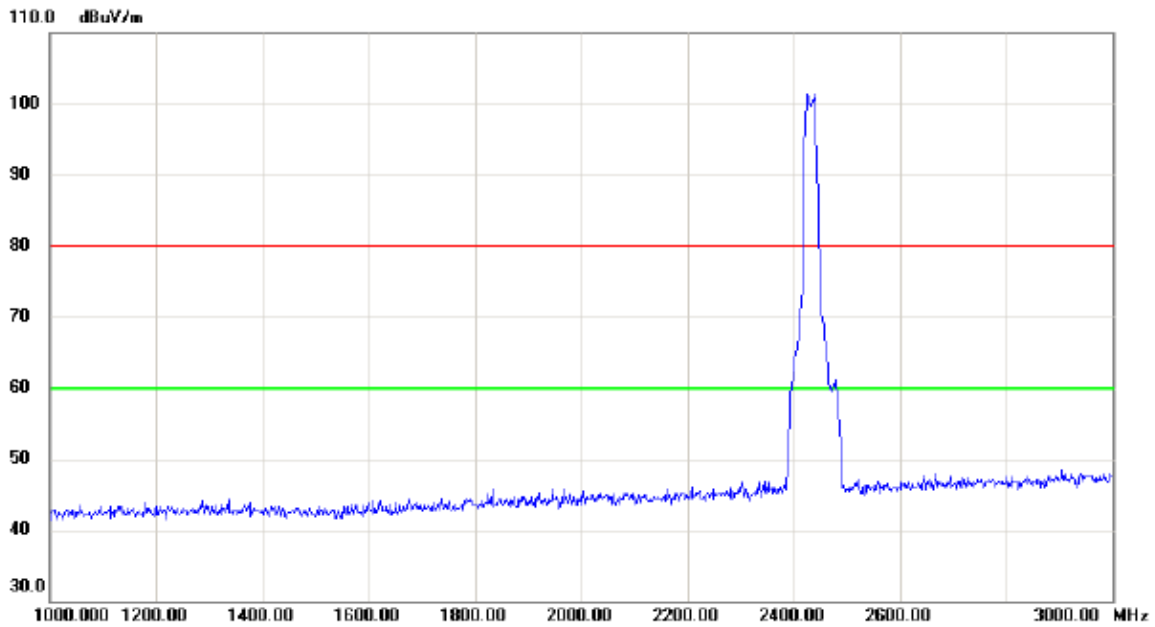


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

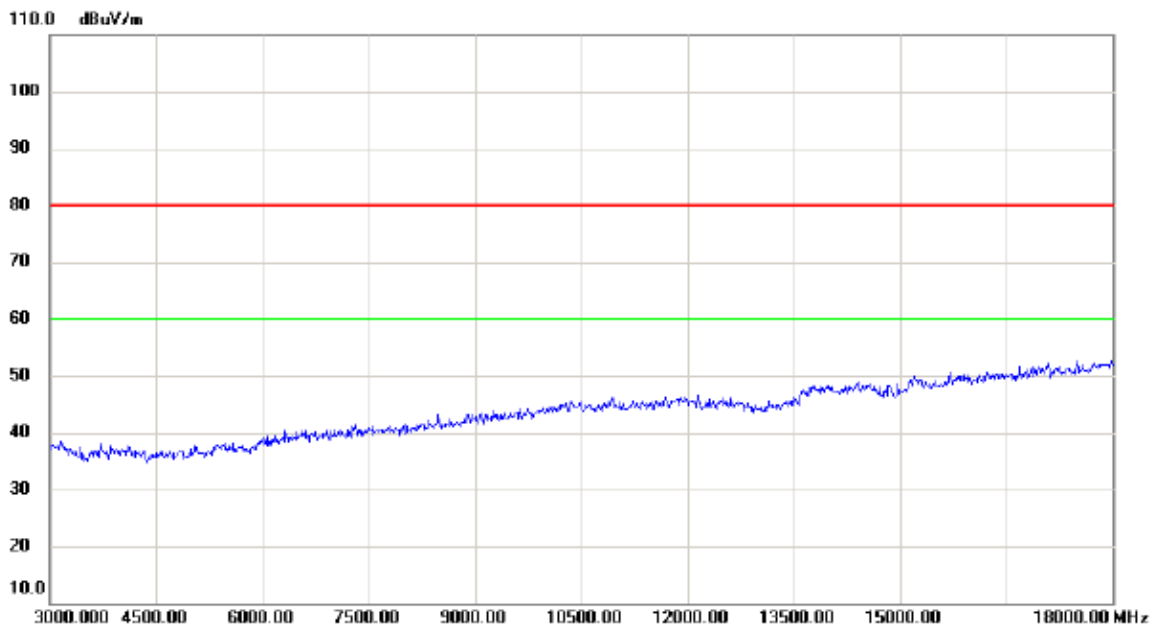

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 1


Vertical

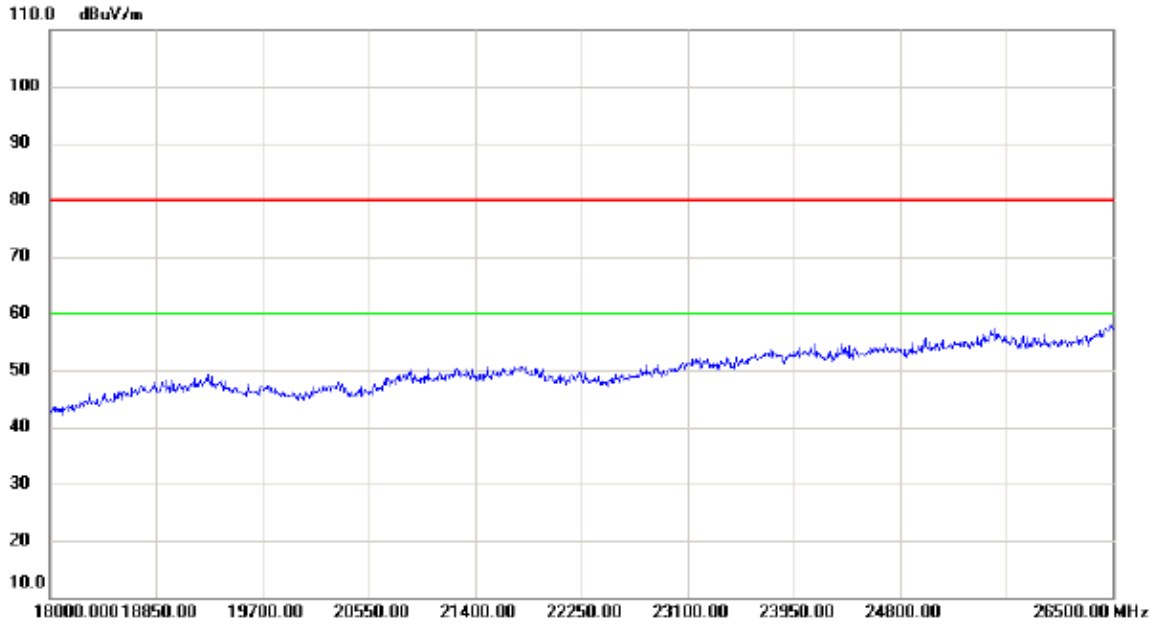

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 1


Horizontal

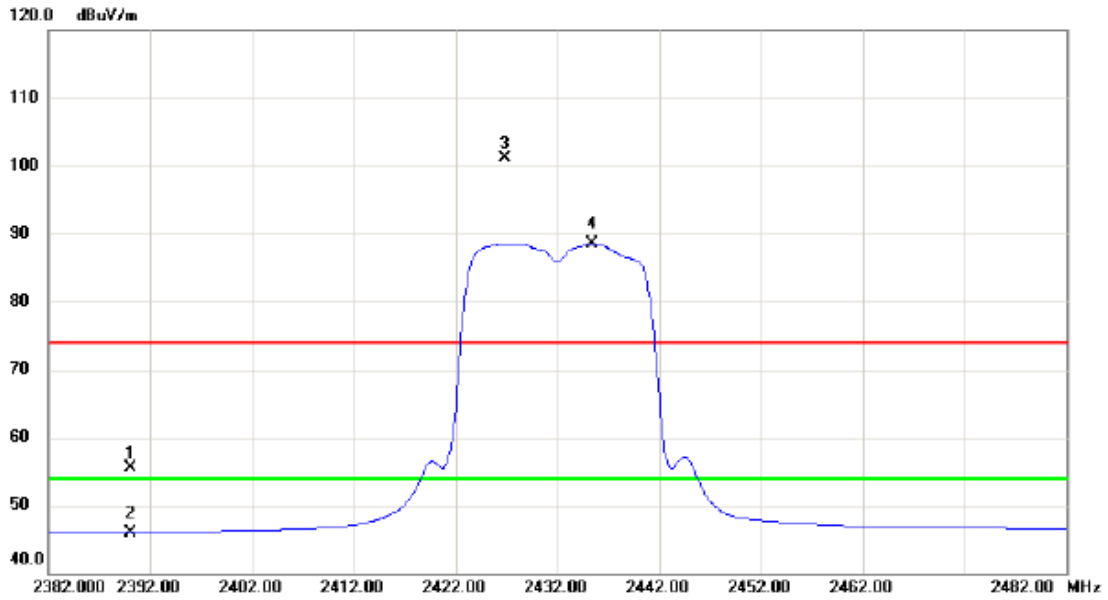


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	22.45	33.01	55.46	74.00	-18.54	peak	
2		2390.000	12.99	33.01	46.00	54.00	-8.00	AVG	
3	X	2426.900	67.87	33.17	101.04	74.00	27.04	peak	No Limit
4	*	2435.400	55.40	33.20	88.60	54.00	34.60	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 1

Horizontal

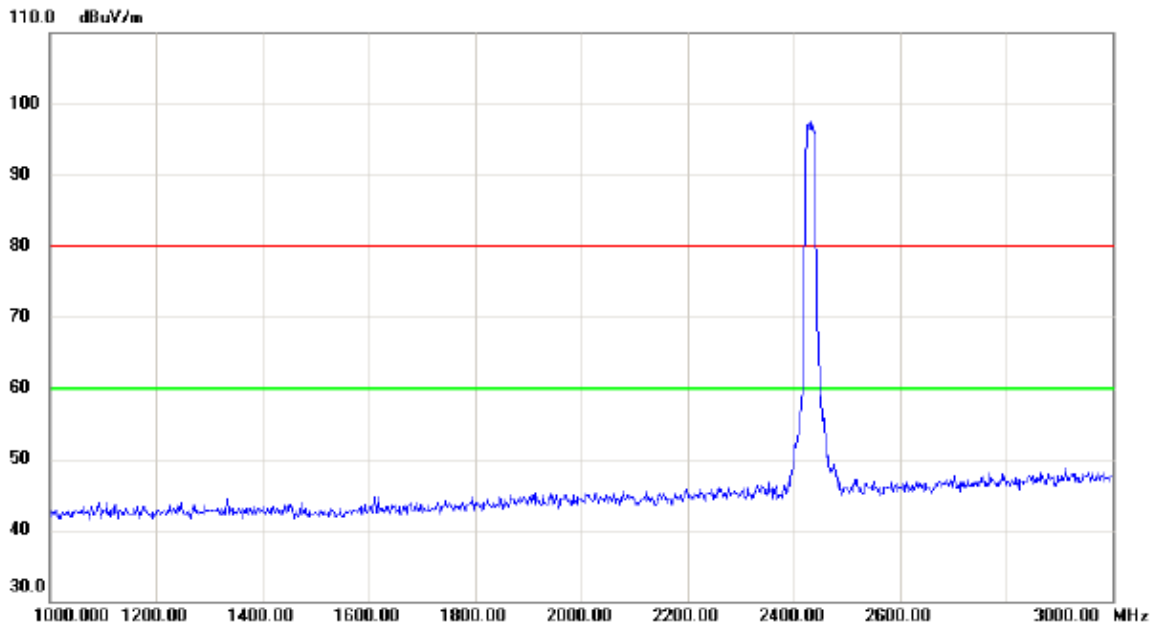


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

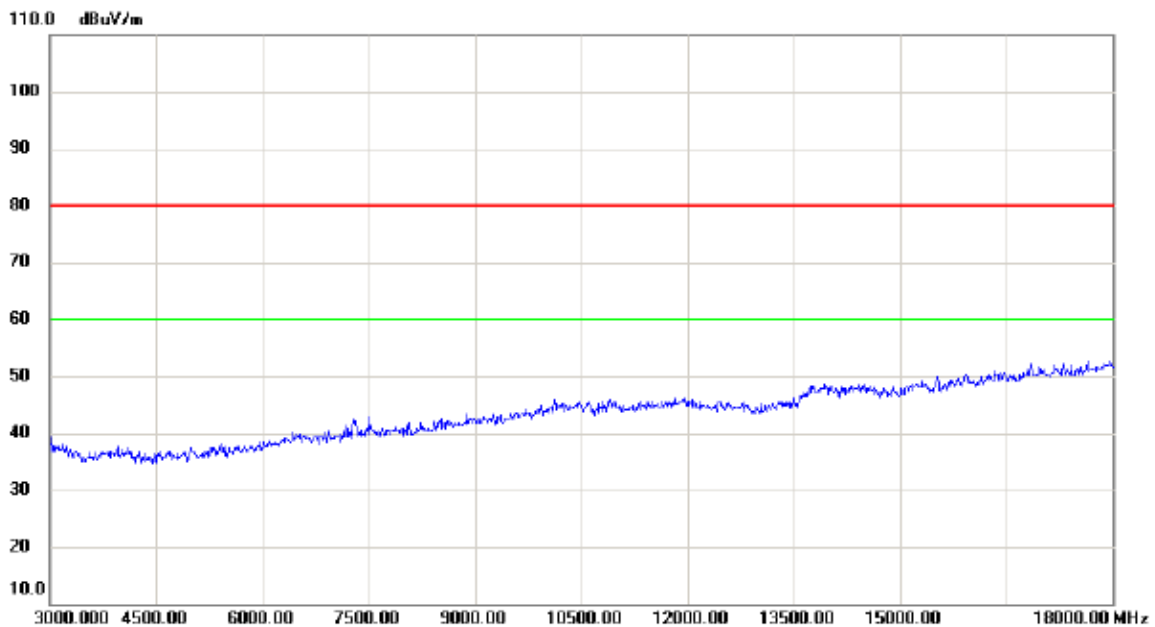

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 1


Horizontal

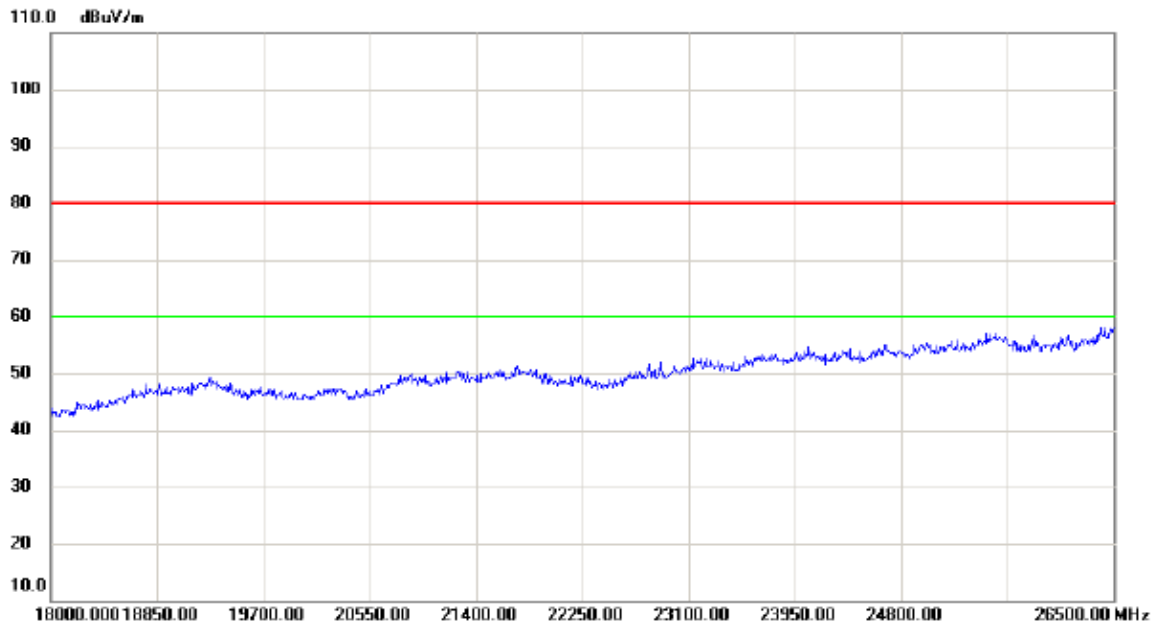

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 1


Vertical

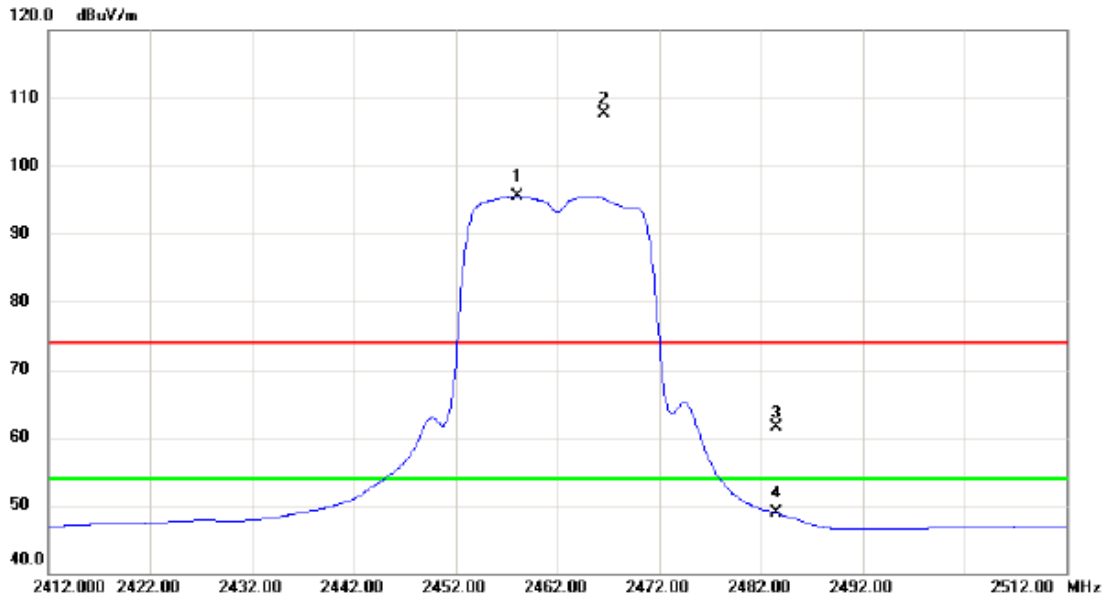


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2458.000	62.27	33.30	95.57	54.00	41.57	AVG	No Limit
2	X	2466.600	74.46	33.33	107.79	74.00	33.79	peak	No Limit
3		2483.500	28.10	33.40	61.50	74.00	-12.50	peak	
4		2483.500	15.50	33.40	48.90	54.00	-5.10	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 1

Vertical

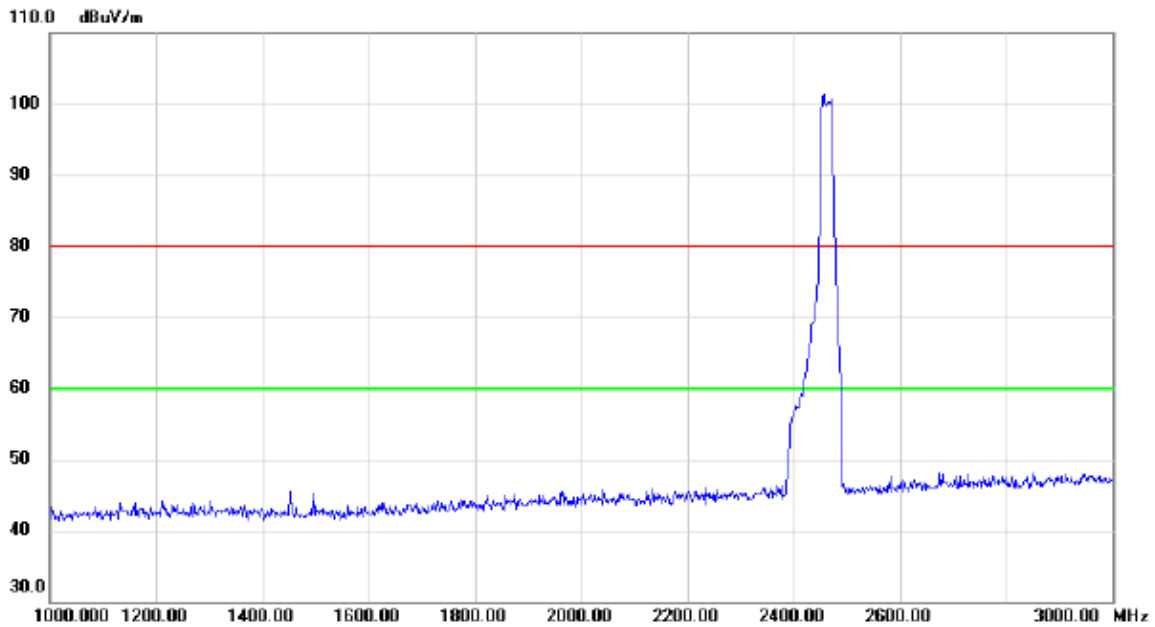


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

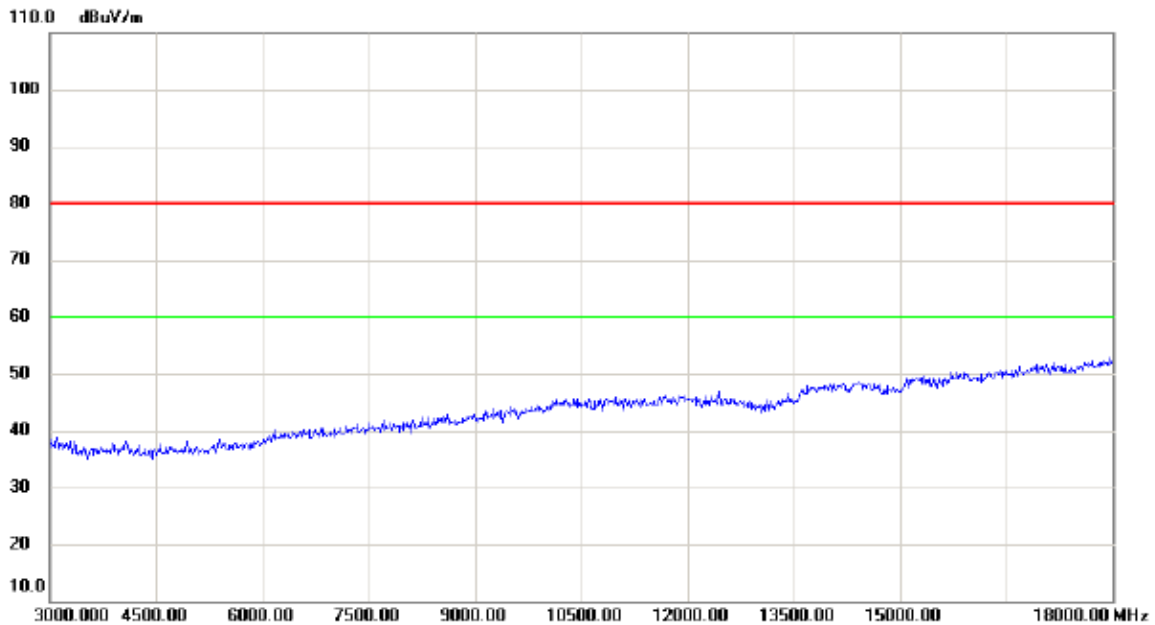

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 1

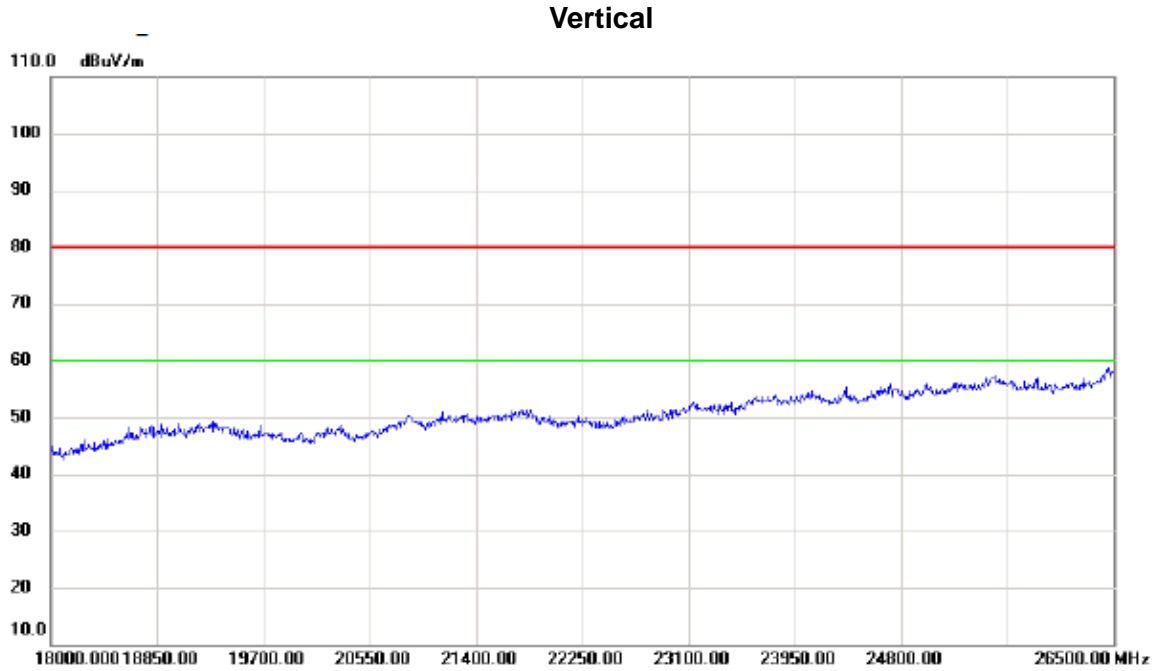

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 1


Horizontal

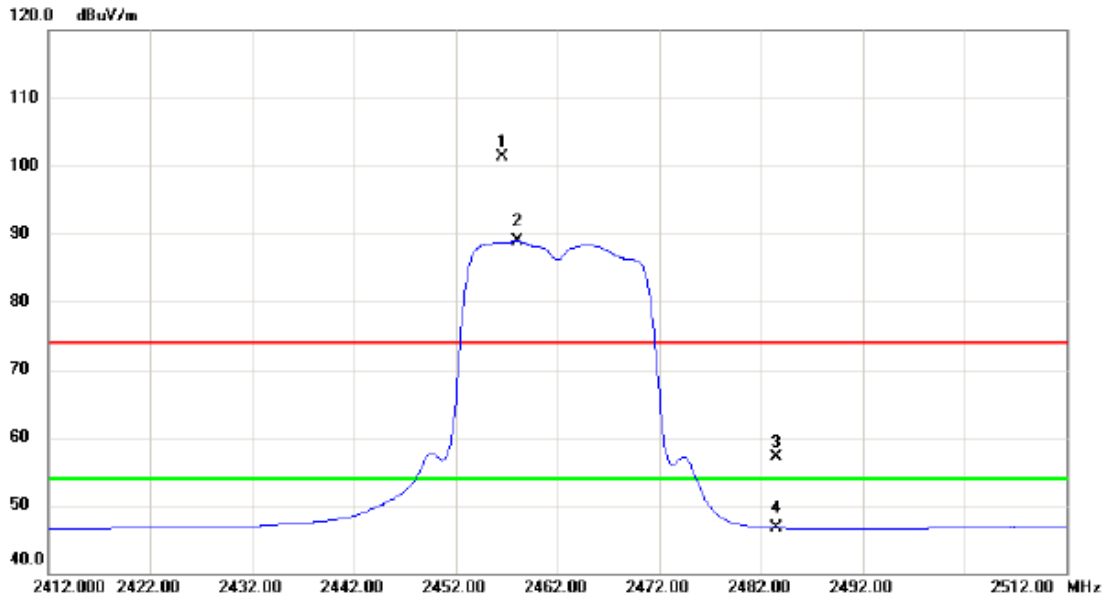


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.600	68.06	33.29	101.35	74.00	27.35	peak	No Limit
2	*	2458.000	55.58	33.30	88.88	54.00	34.88	AVG	No Limit
3		2483.500	23.76	33.40	57.16	74.00	-16.84	peak	
4		2483.500	13.27	33.40	46.67	54.00	-7.33	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 1

Horizontal

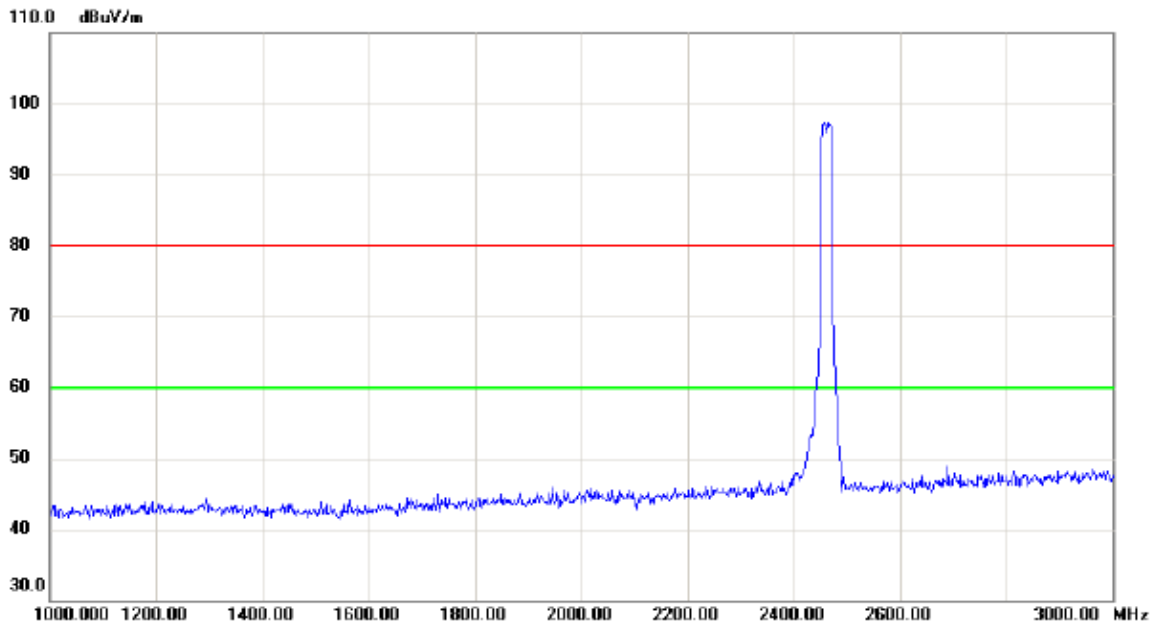


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

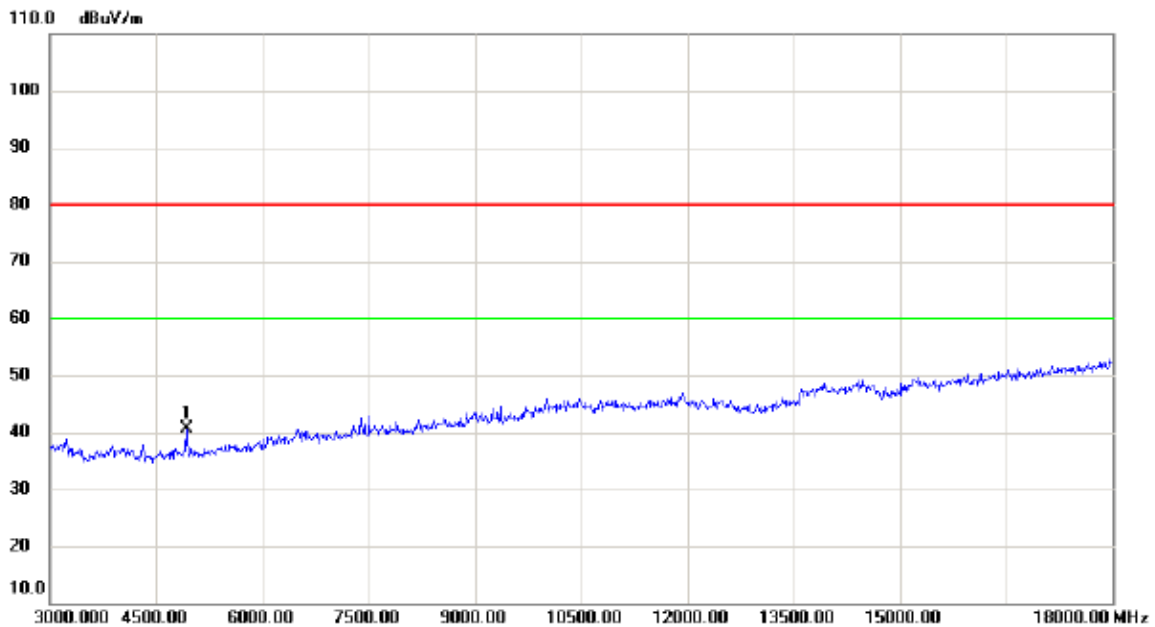

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4920.000	37.24	3.38	40.62	80.00	-39.38	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 1


Horizontal

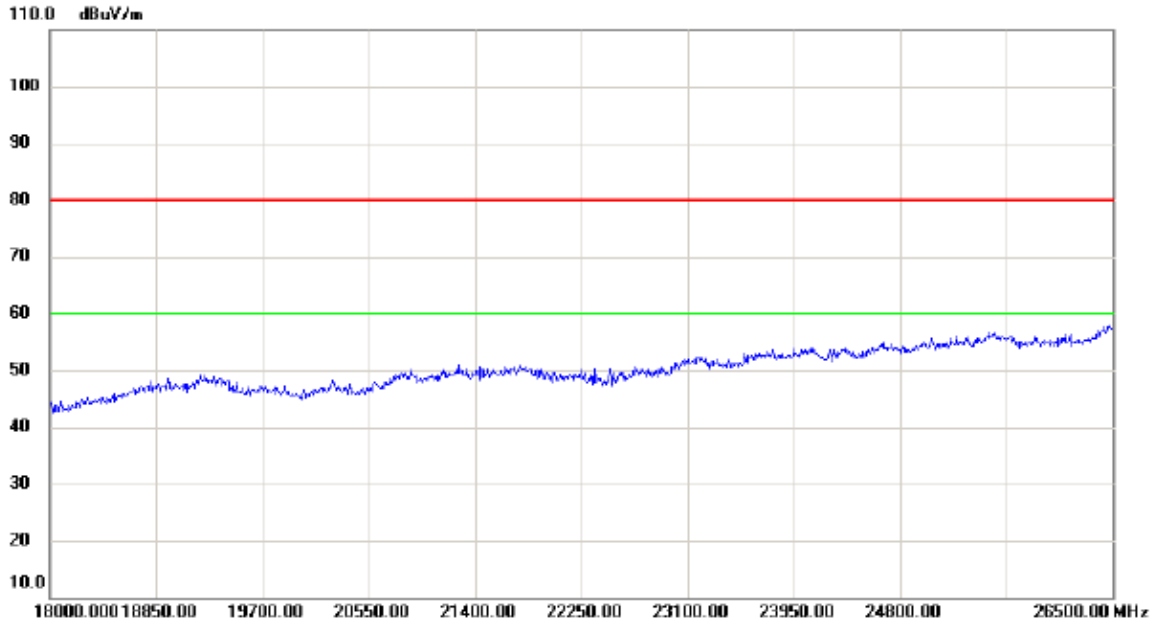

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 1


Vertical

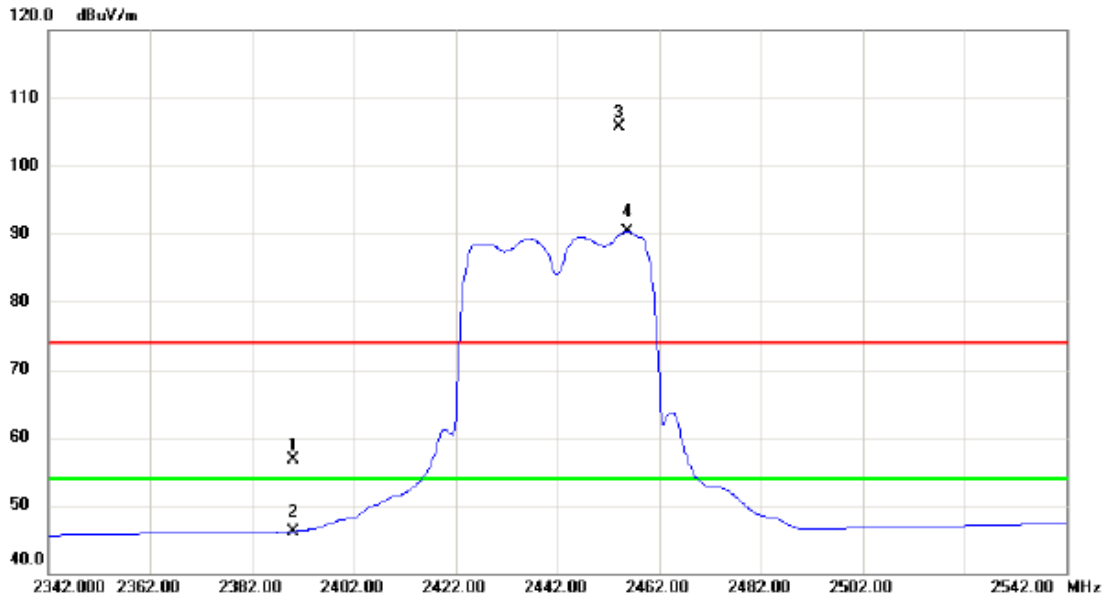


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.62	33.01	56.63	74.00	-17.37	peak	
2		2390.000	13.15	33.01	46.16	54.00	-7.84	AVG	
3	X	2454.200	72.48	33.28	105.76	74.00	31.76	peak	No Limit
4	*	2455.800	57.02	33.29	90.31	54.00	36.31	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 1

Vertical

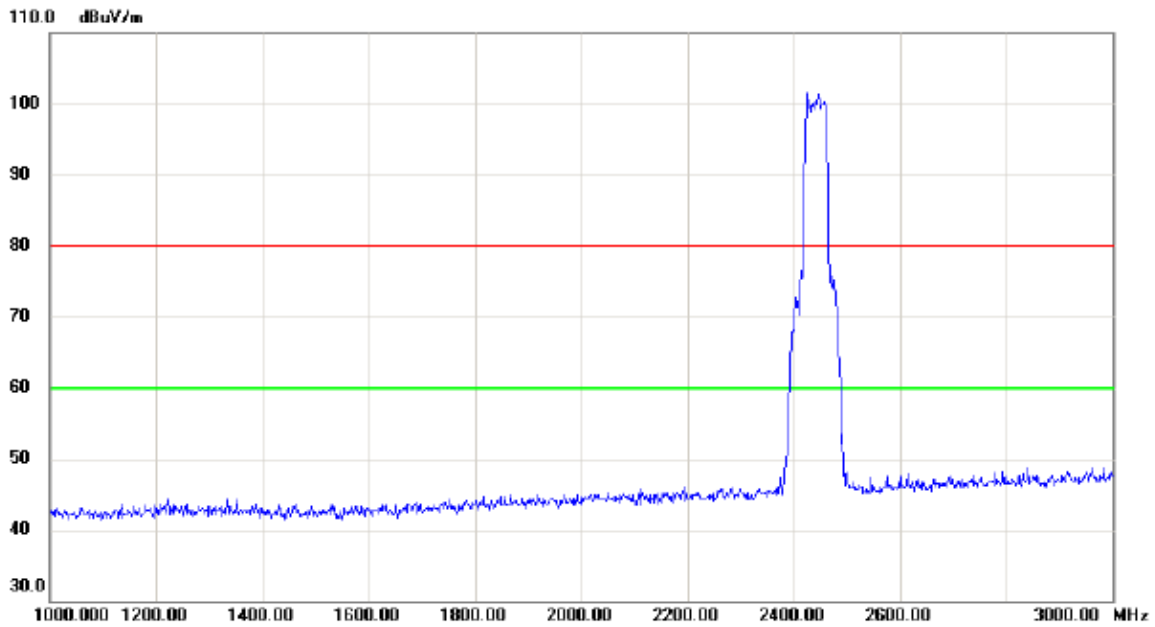


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

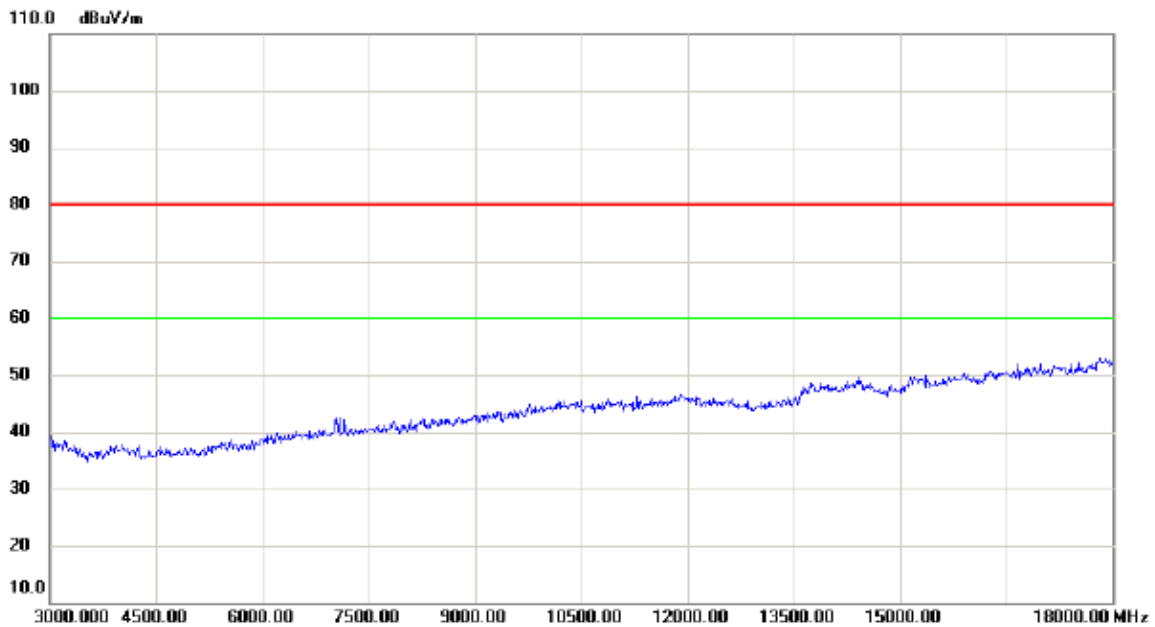

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 1


Vertical

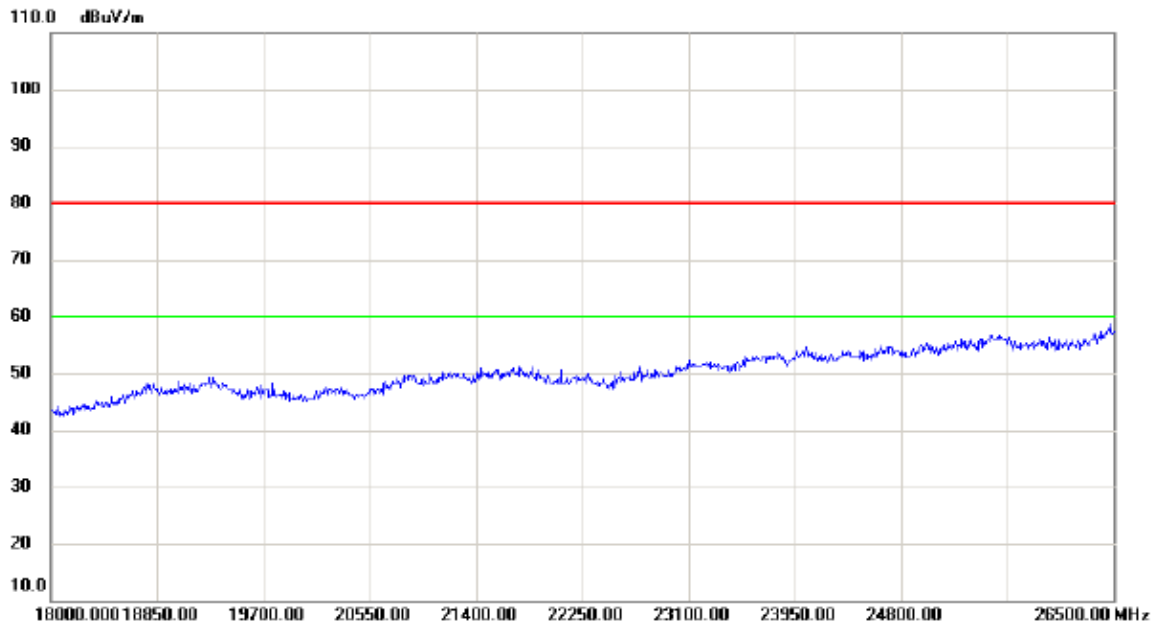

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 1


Horizontal

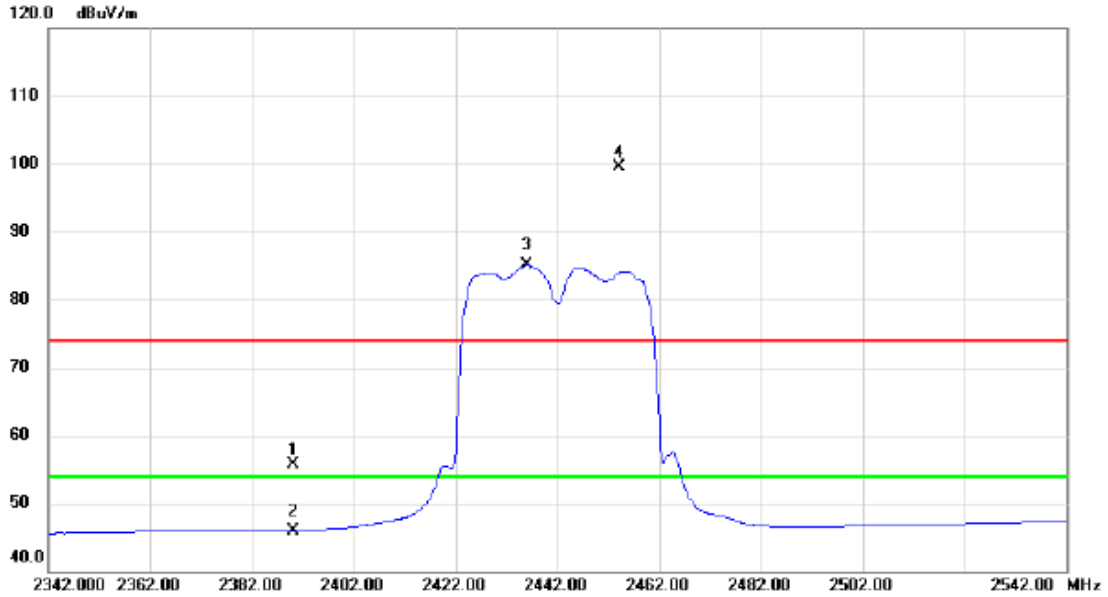


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	22.68	33.01	55.69	74.00	-18.31	peak	
2		2390.000	12.98	33.01	45.99	54.00	-8.01	AVG	
3	*	2436.000	51.85	33.21	85.06	54.00	31.06	AVG	No Limit
4	X	2454.200	66.30	33.28	99.58	74.00	25.58	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 1

Horizontal

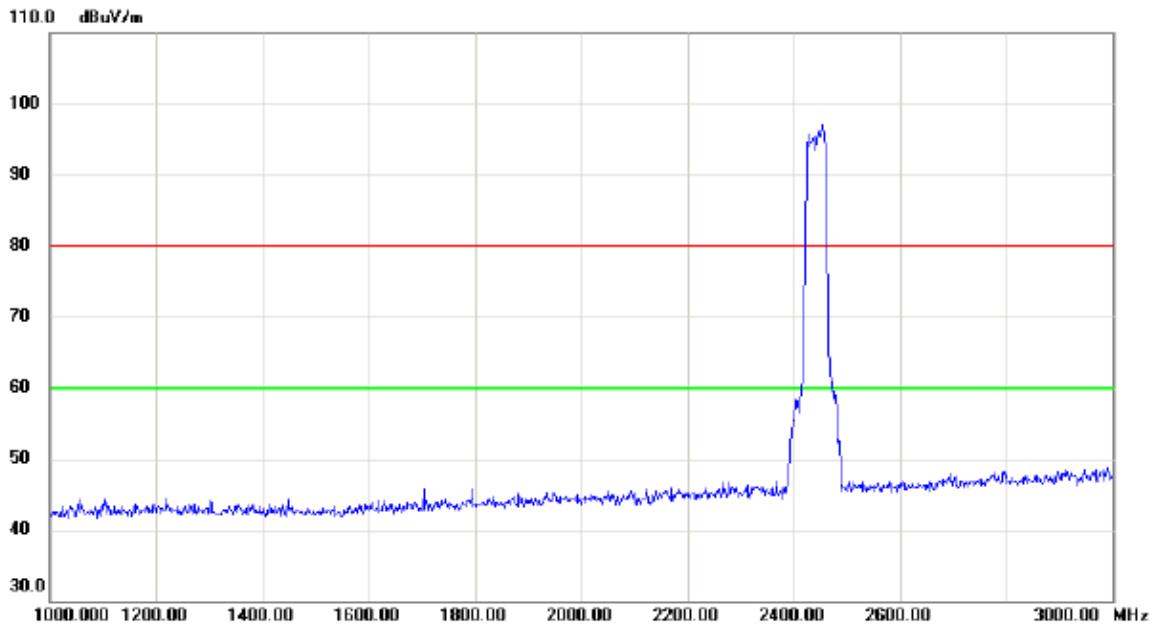


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

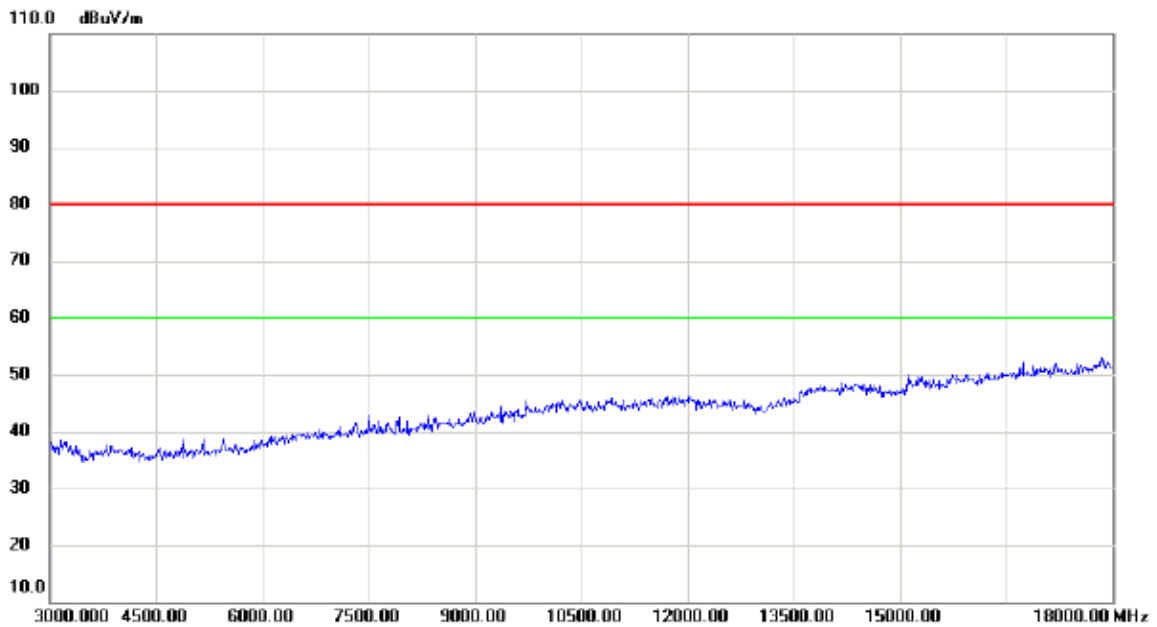

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 1


Horizontal

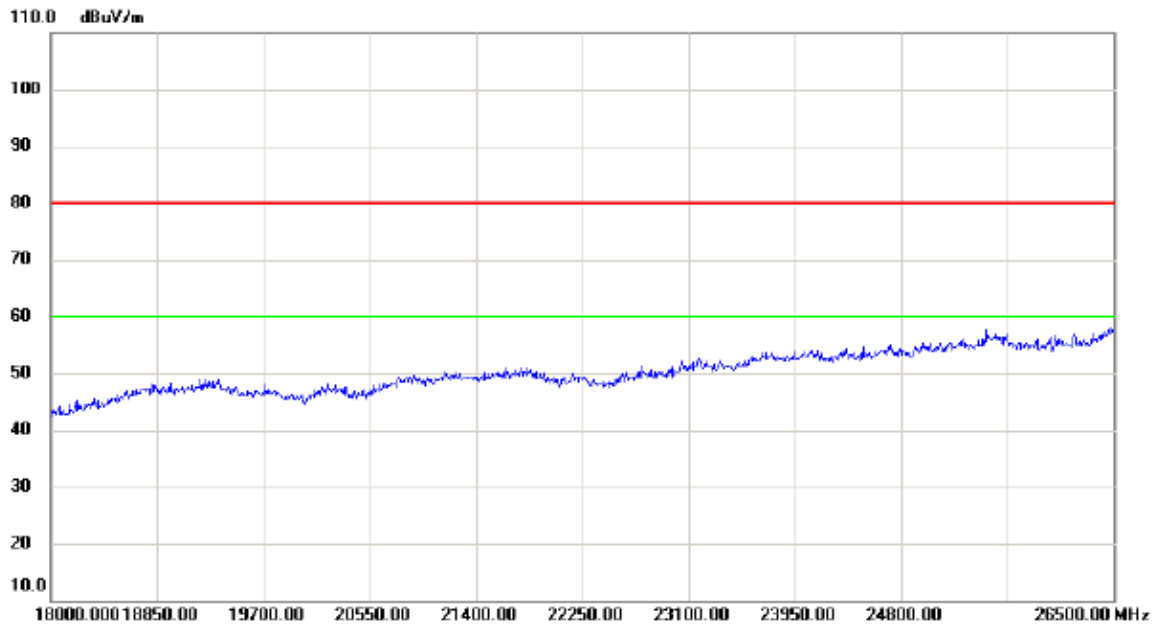

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 1


Vertical

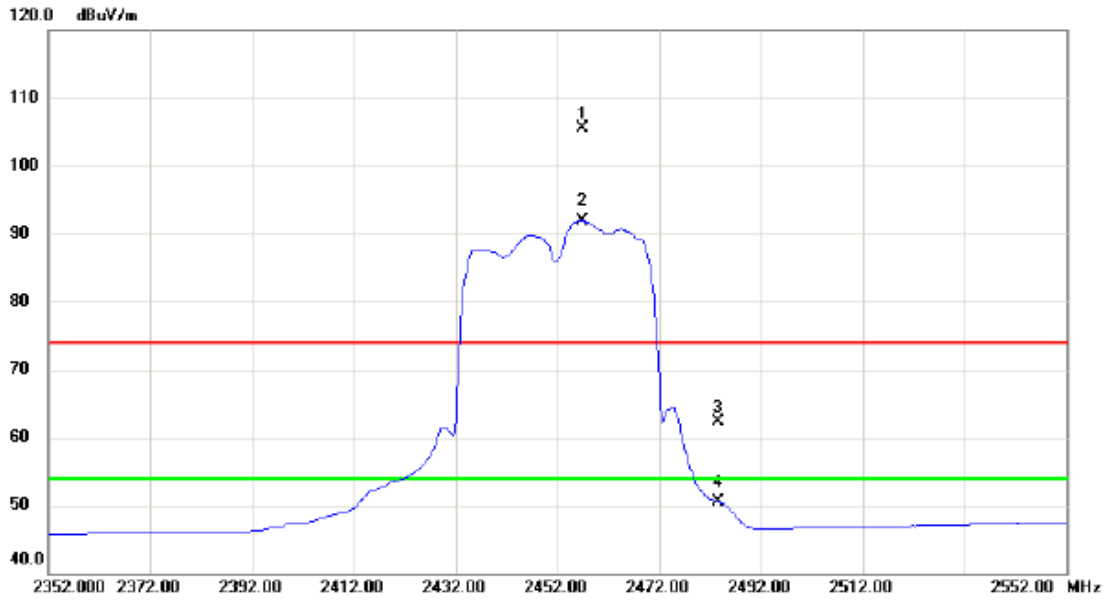


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.800	72.30	33.29	105.59	74.00	31.59	peak	No Limit
2	*	2457.000	58.67	33.29	91.96	54.00	37.96	AVG	No Limit
3		2483.500	28.83	33.40	62.23	74.00	-11.77	peak	
4		2483.500	17.18	33.40	50.58	54.00	-3.42	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 1

Vertical

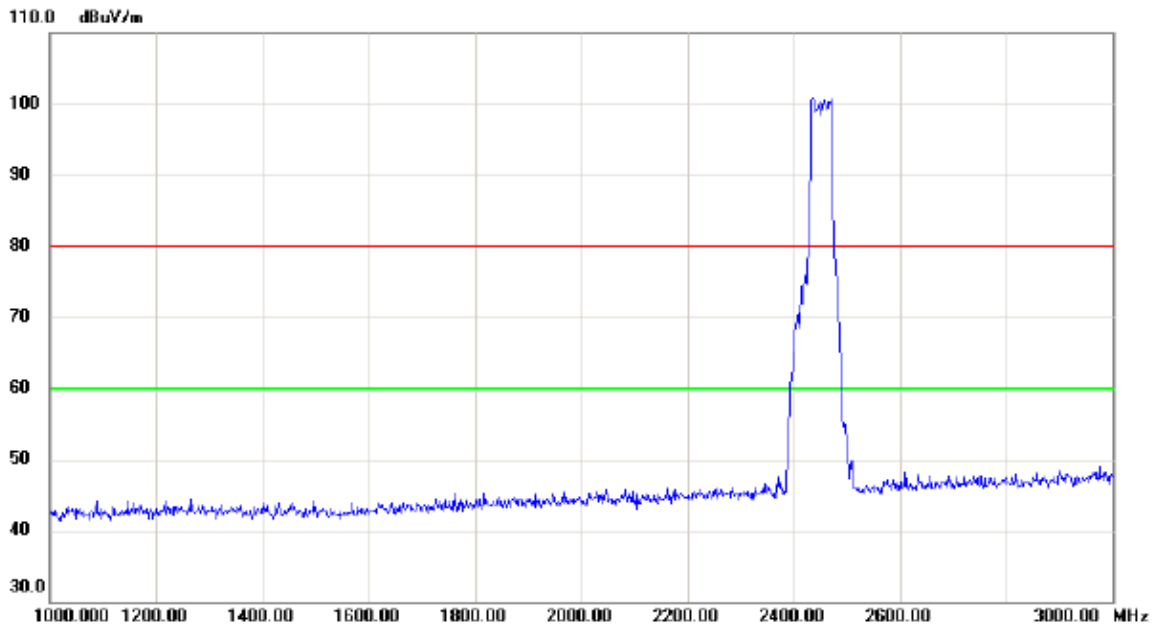


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

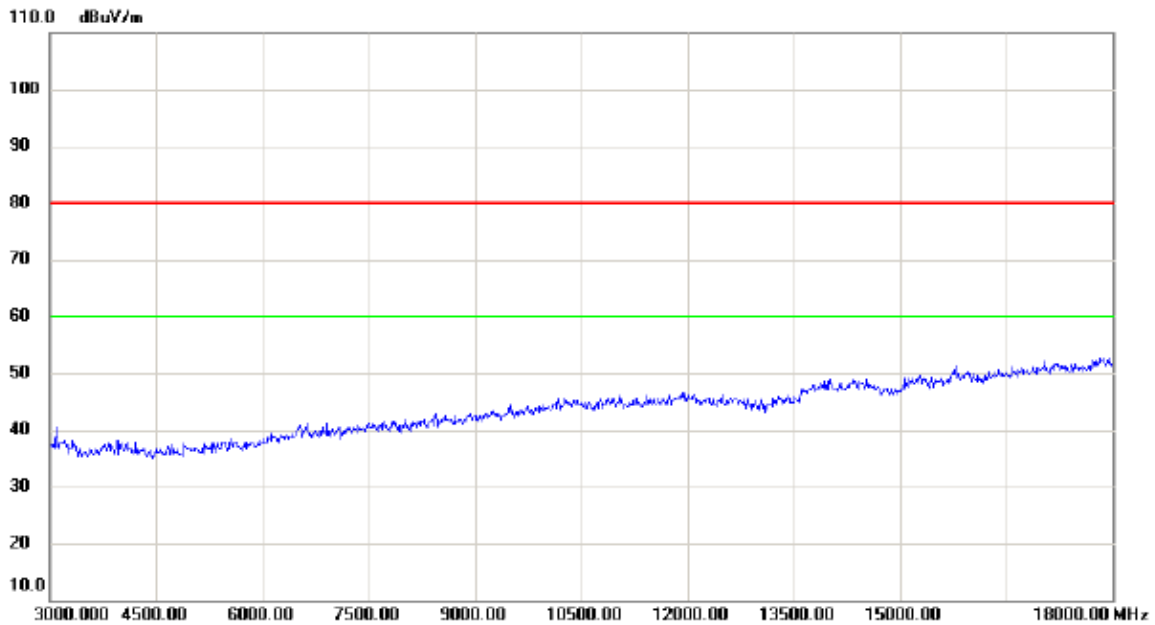

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 1


Vertical

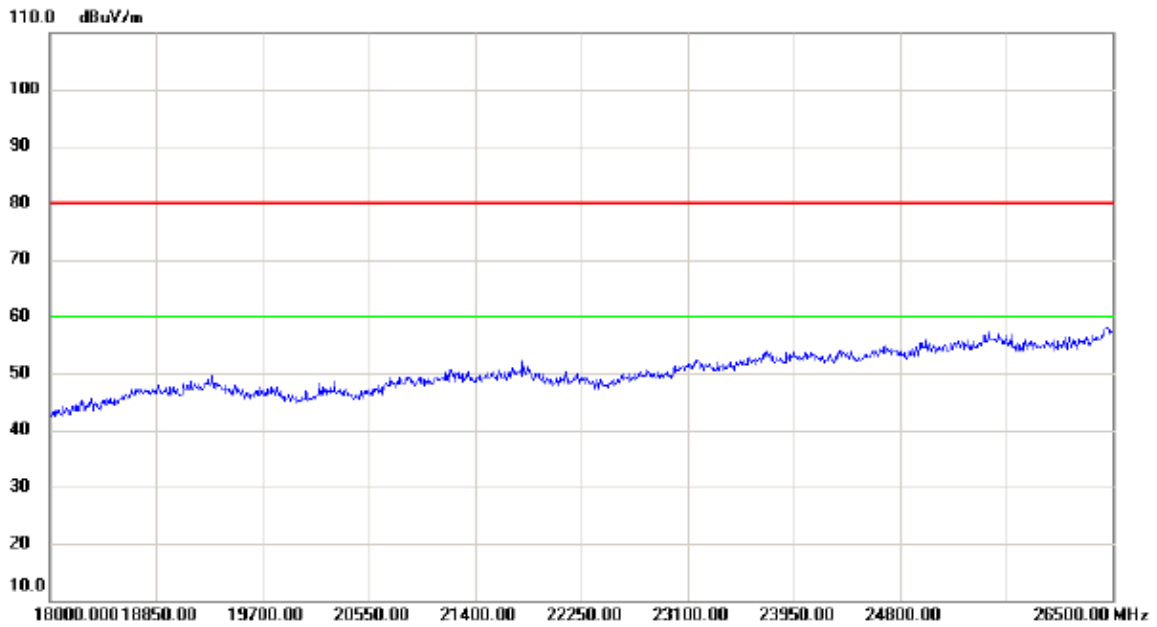

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 1


Horizontal

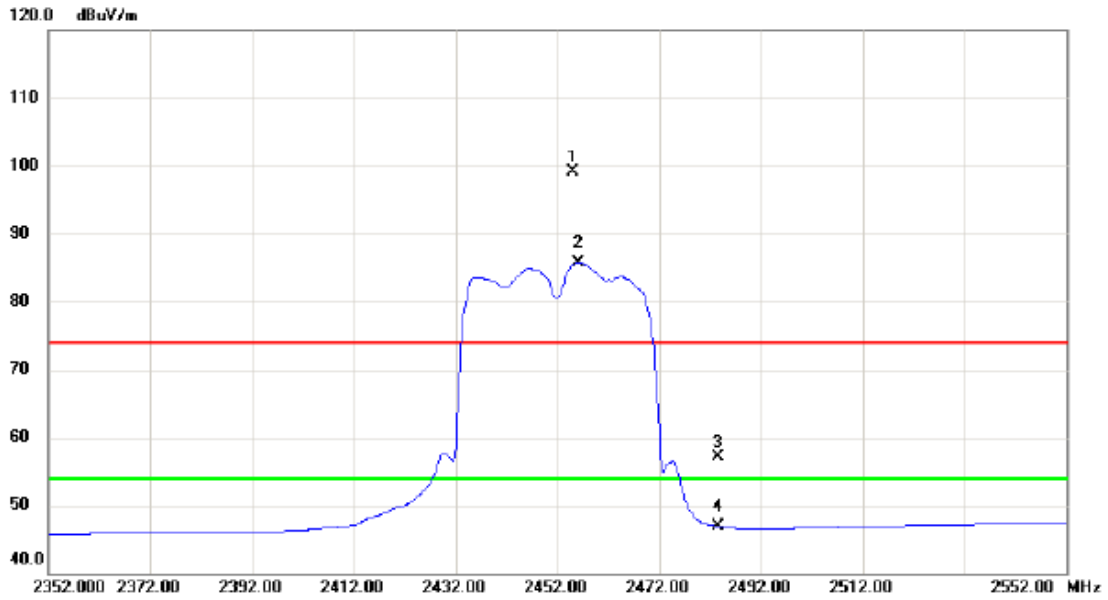


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2455.000	65.89	33.29	99.18	74.00	25.18	peak	No Limit
2	*	2456.000	52.44	33.29	85.73	54.00	31.73	AVG	No Limit
3		2483.500	23.73	33.40	57.13	74.00	-16.87	peak	
4		2483.500	13.55	33.40	46.95	54.00	-7.05	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 1

Horizontal

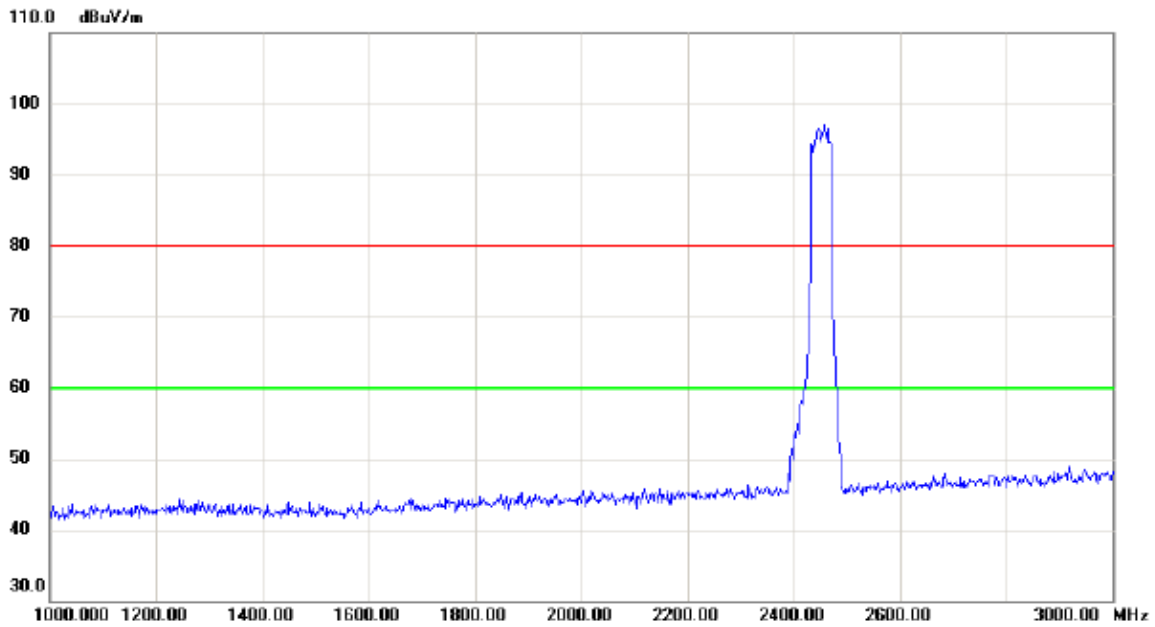


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

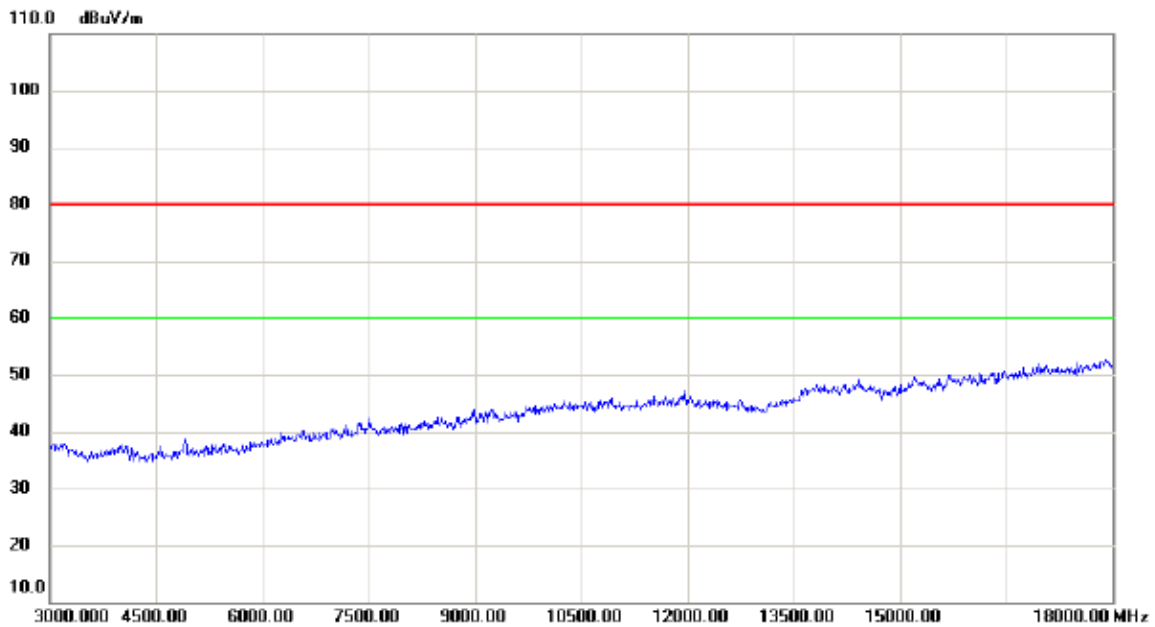

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 1


Horizontal

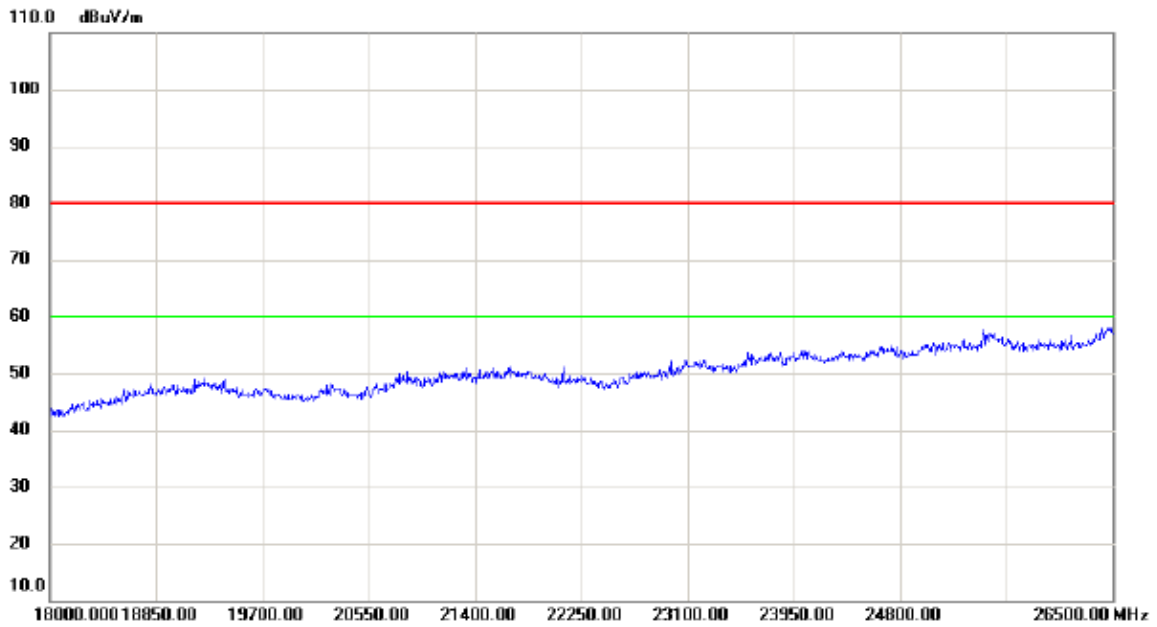

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0+ ANT 1


Vertical

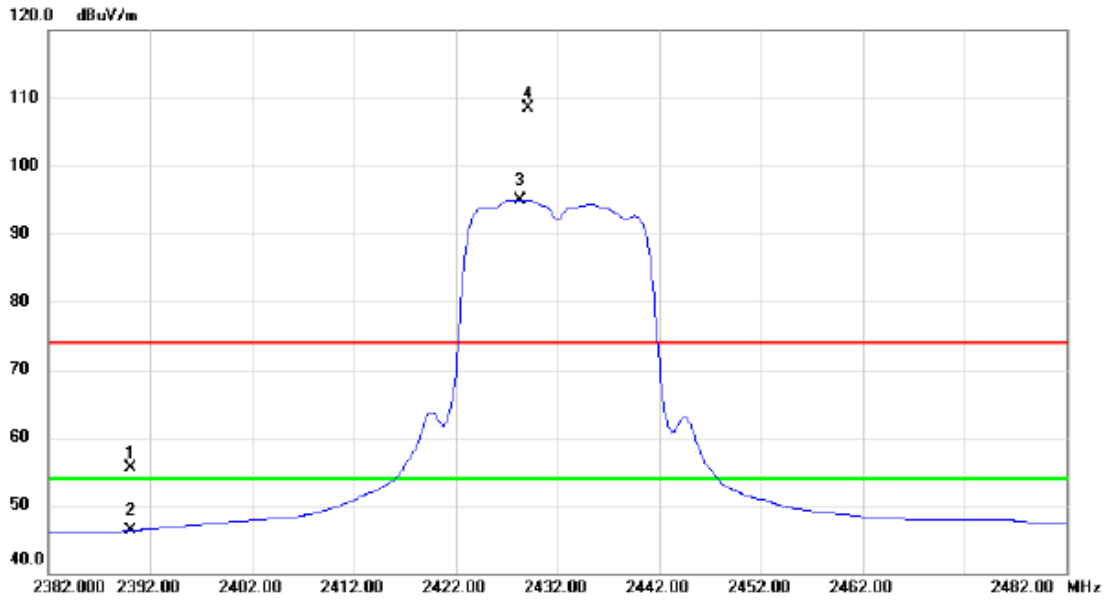


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	22.42	33.01	55.43	74.00	-18.57	peak	
2		2390.000	13.28	33.01	46.29	54.00	-7.71	AVG	
3	*	2428.300	61.81	33.17	94.98	54.00	40.98	AVG	No Limit
4	X	2429.200	75.42	33.17	108.59	74.00	34.59	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0+ ANT 1

Vertical

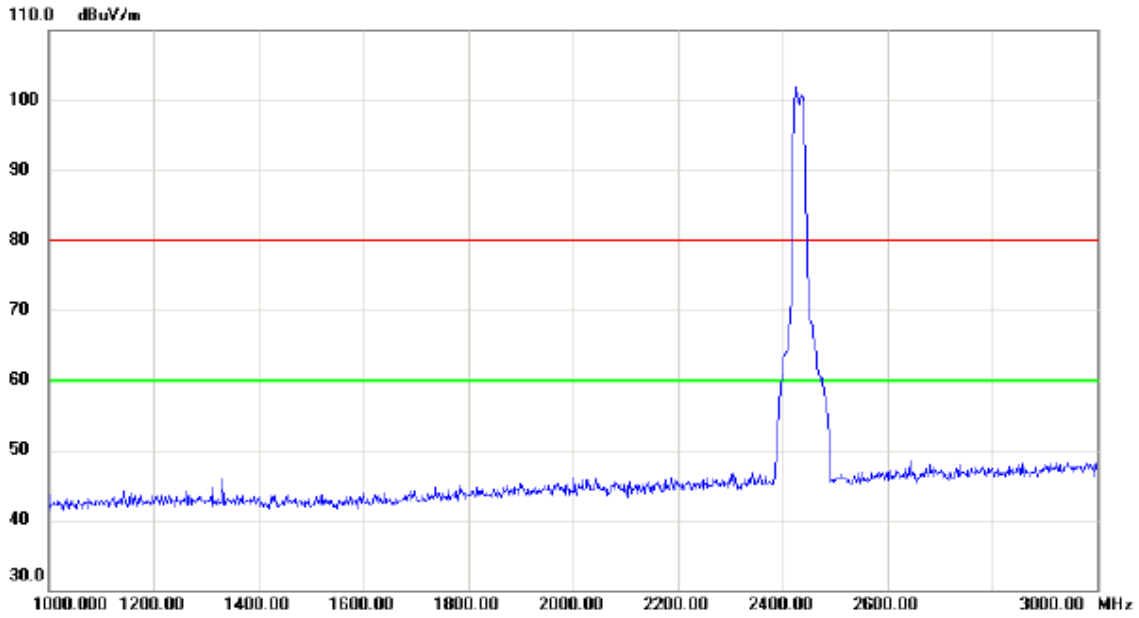


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

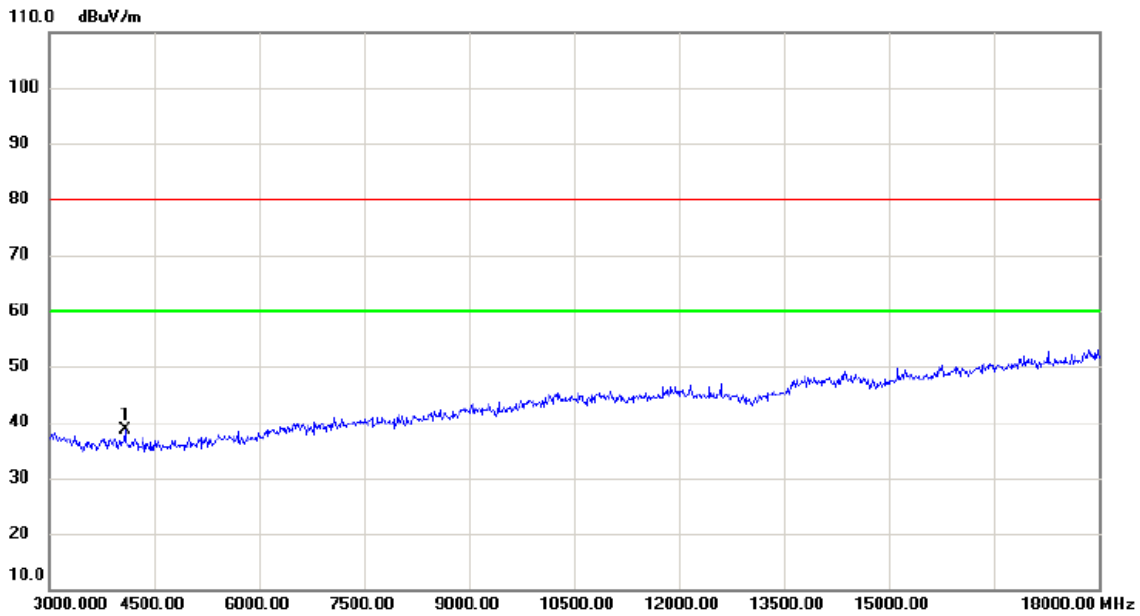

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4080.000	36.54	2.10	38.64	80.00	-41.36	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0+ ANT 1


Vertical

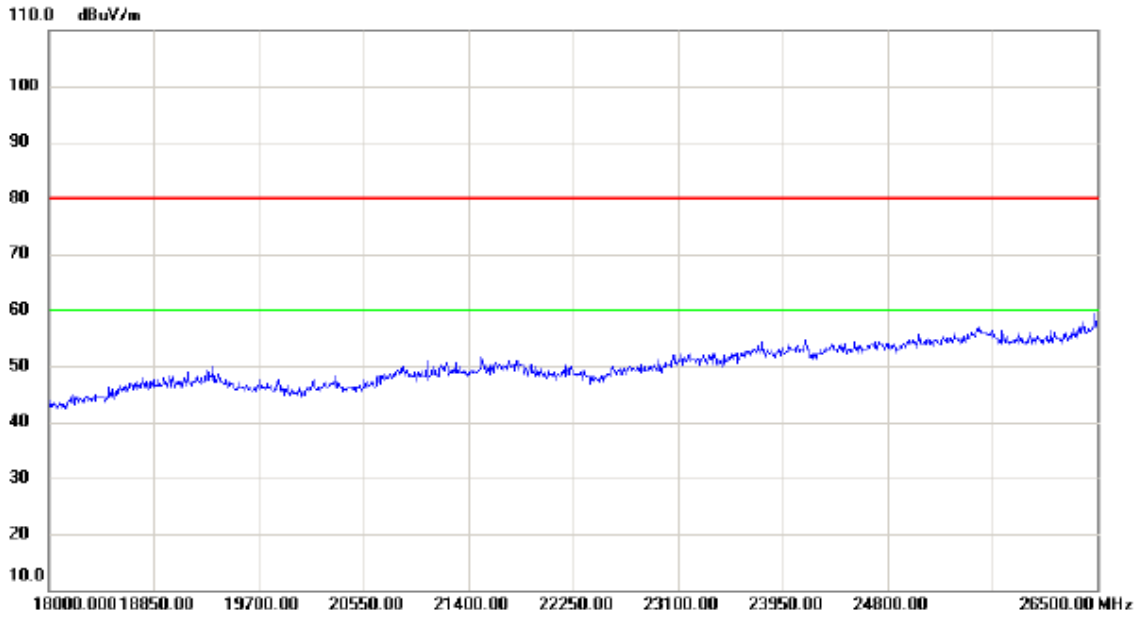

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0+ ANT 1


Horizontal

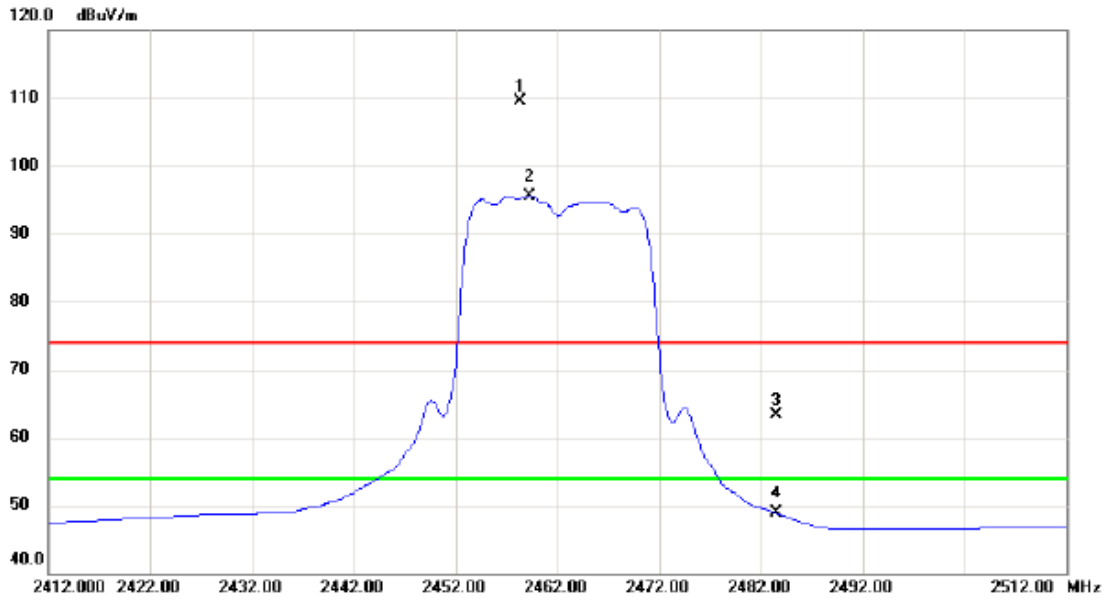


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.300	76.24	33.30	109.54	74.00	35.54	peak	No Limit
2	*	2459.300	62.30	33.30	95.60	54.00	41.60	AVG	No Limit
3		2483.500	29.98	33.40	63.38	74.00	-10.62	peak	
4		2483.500	15.48	33.40	48.88	54.00	-5.12	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0+ ANT 1

Horizontal

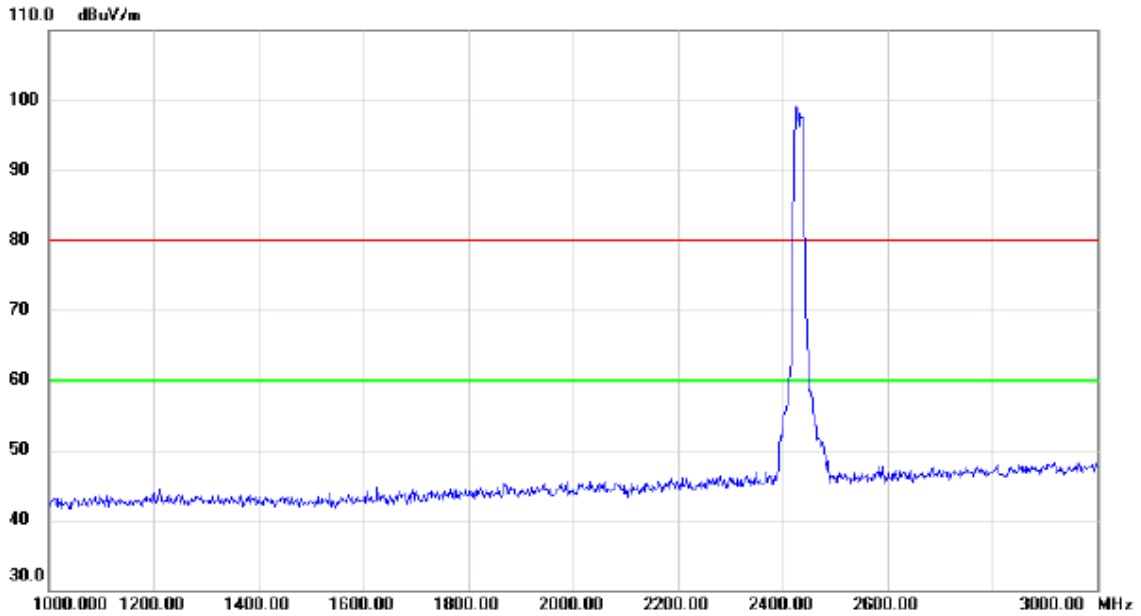


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

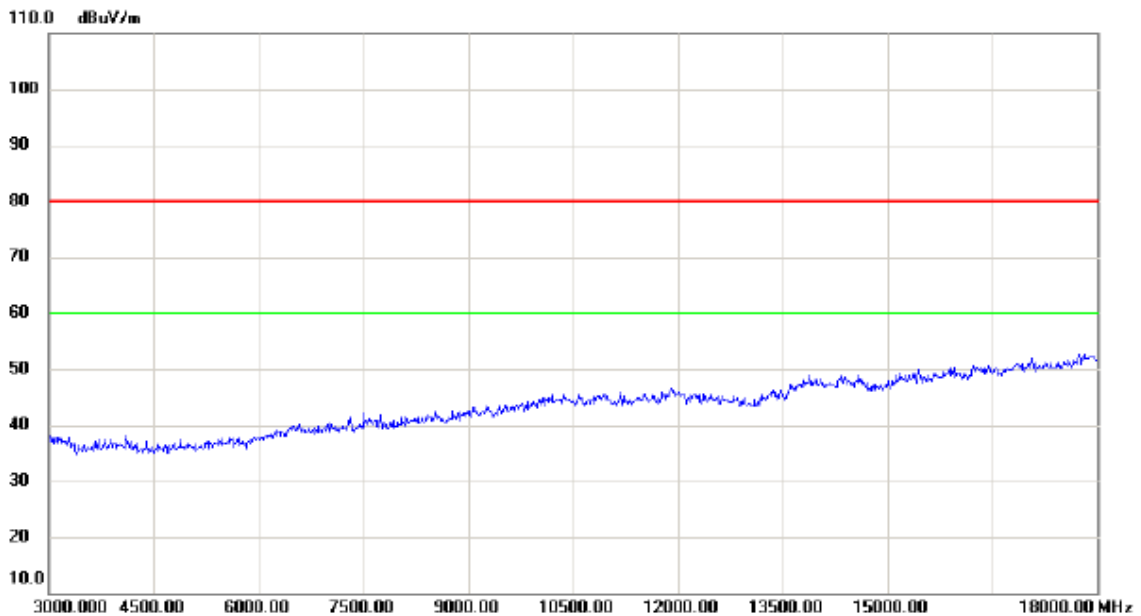

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2432MHz_ANT 0+ ANT 1


Horizontal

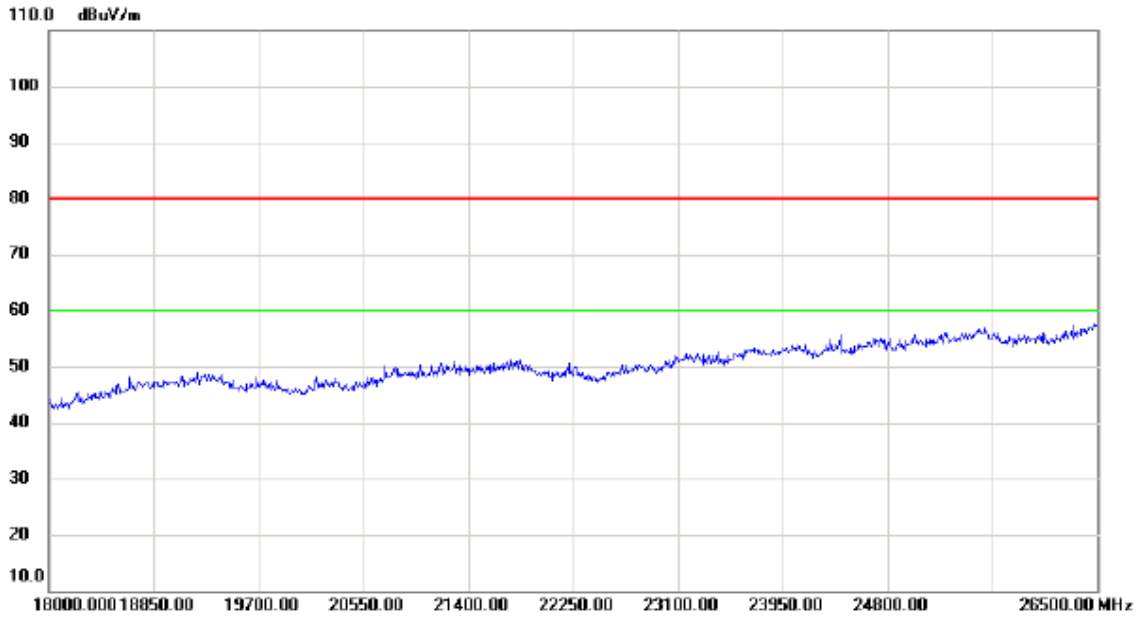

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0+ ANT 1


Vertical

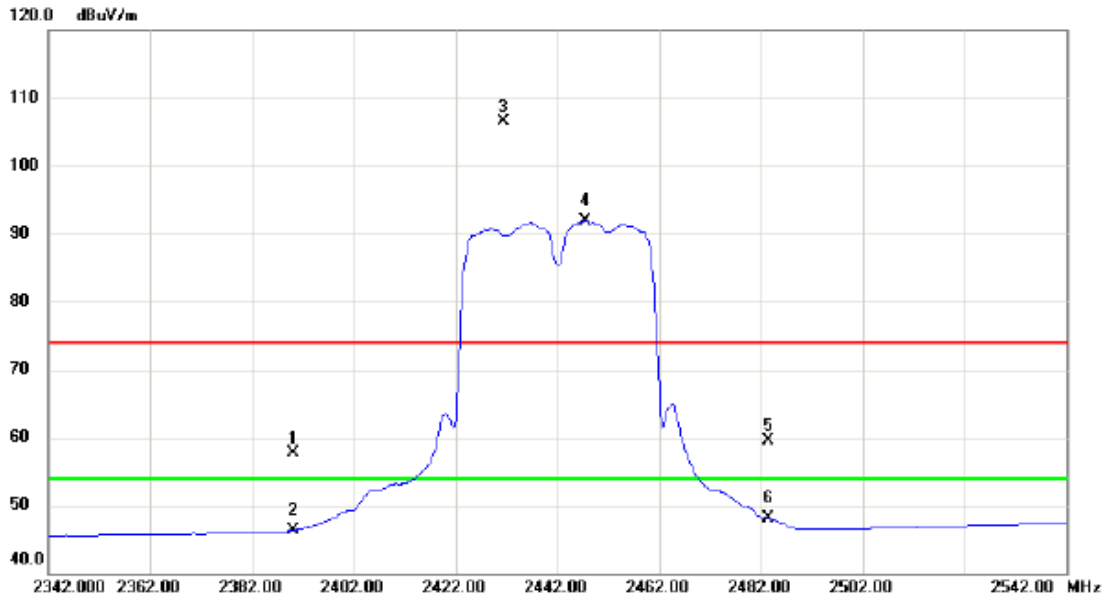


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	24.79	33.01	57.80	74.00	-16.20	peak	
2		2390.000	13.29	33.01	46.30	54.00	-7.70	AVG	
3	X	2431.400	73.25	33.18	106.43	74.00	32.43	peak	No Limit
4	*	2447.600	58.63	33.25	91.88	54.00	37.88	AVG	No Limit
5		2483.500	26.10	33.40	59.50	74.00	-14.50	peak	
6		2483.500	14.69	33.40	48.09	54.00	-5.91	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0+ ANT 1

Vertical

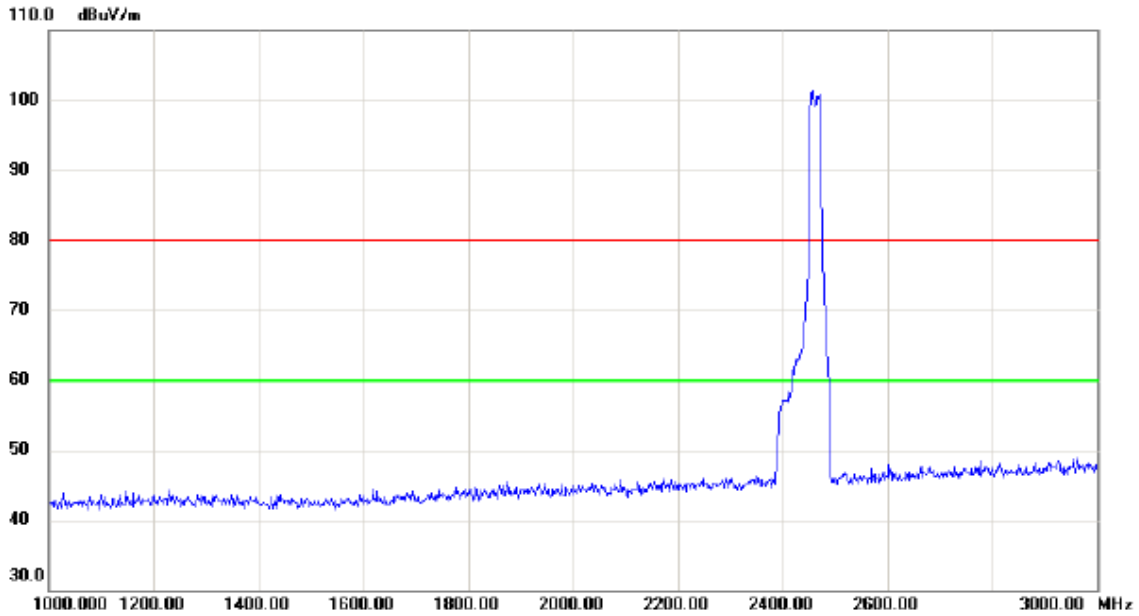


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

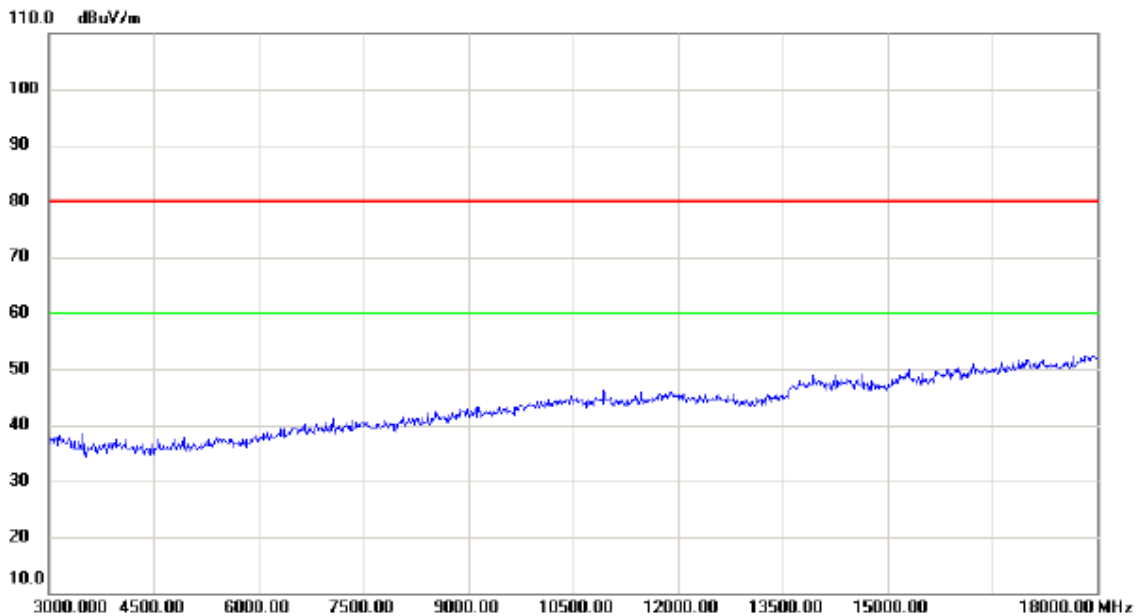

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0+ ANT 1


Vertical

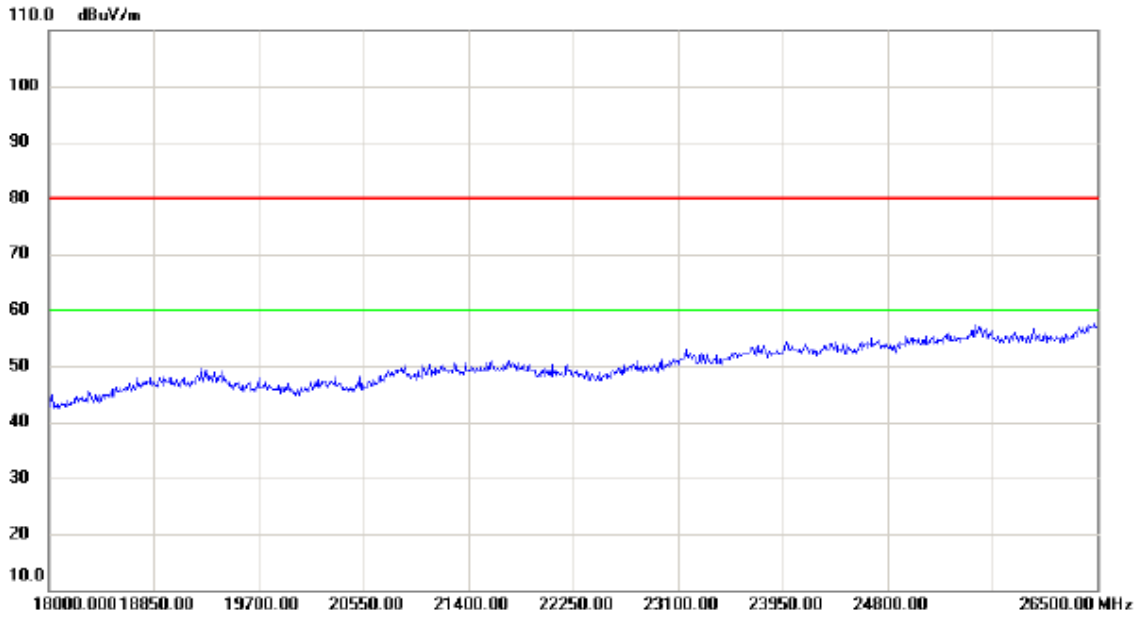

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0+ ANT 1


Horizontal

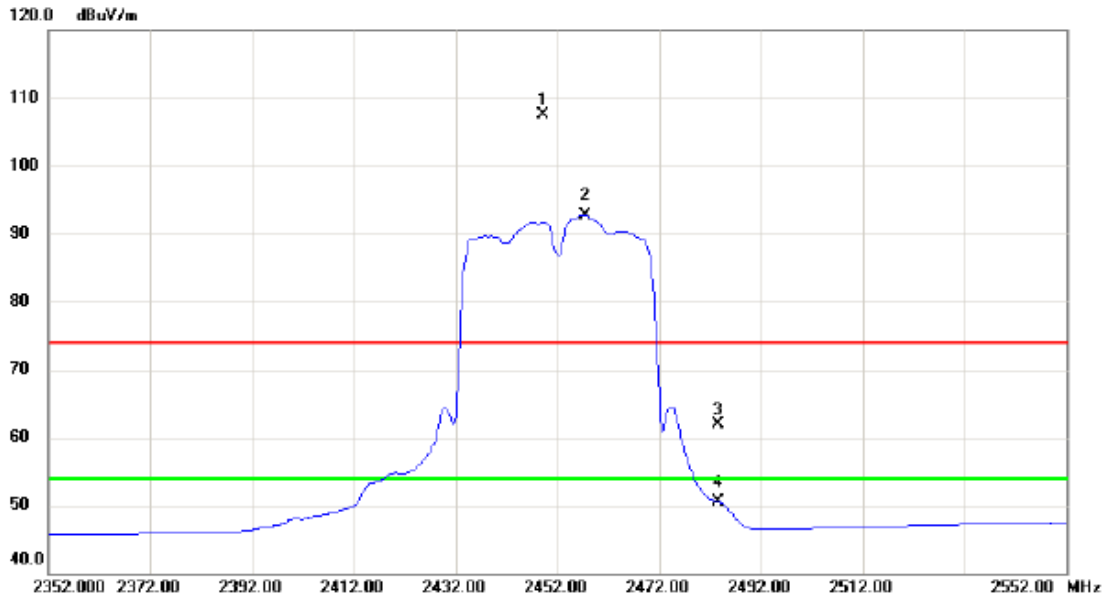


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2449.200	74.28	33.26	107.54	74.00	33.54	peak	No Limit
2	*	2457.600	59.38	33.29	92.67	54.00	38.67	AVG	No Limit
3		2483.500	28.57	33.40	61.97	74.00	-12.03	peak	
4		2483.500	17.12	33.40	50.52	54.00	-3.48	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0+ ANT 1

Horizontal

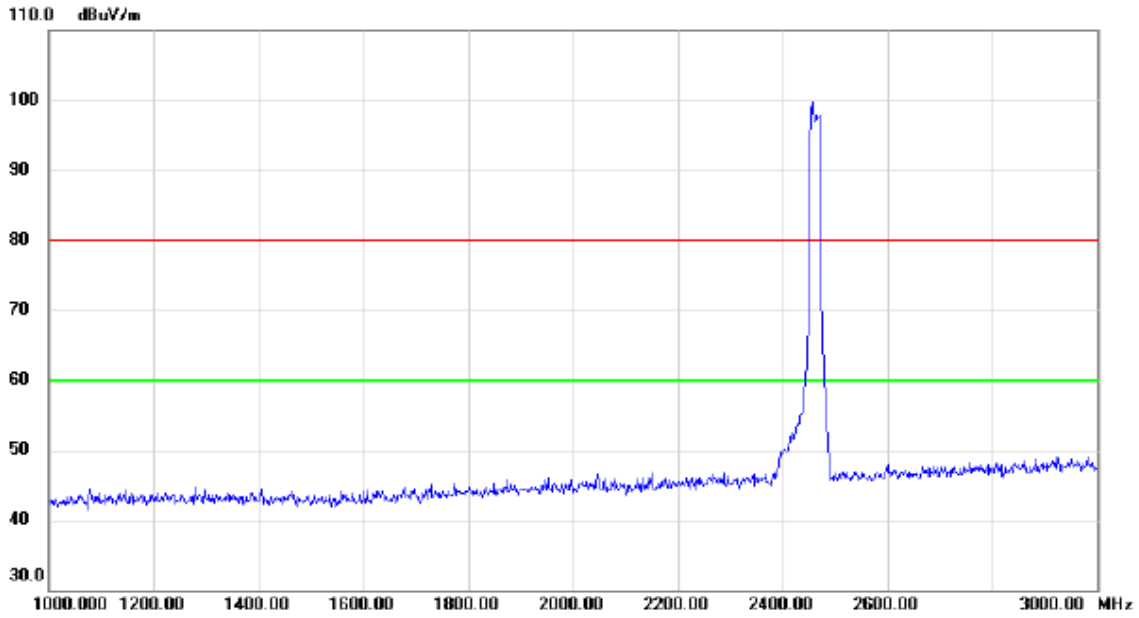


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

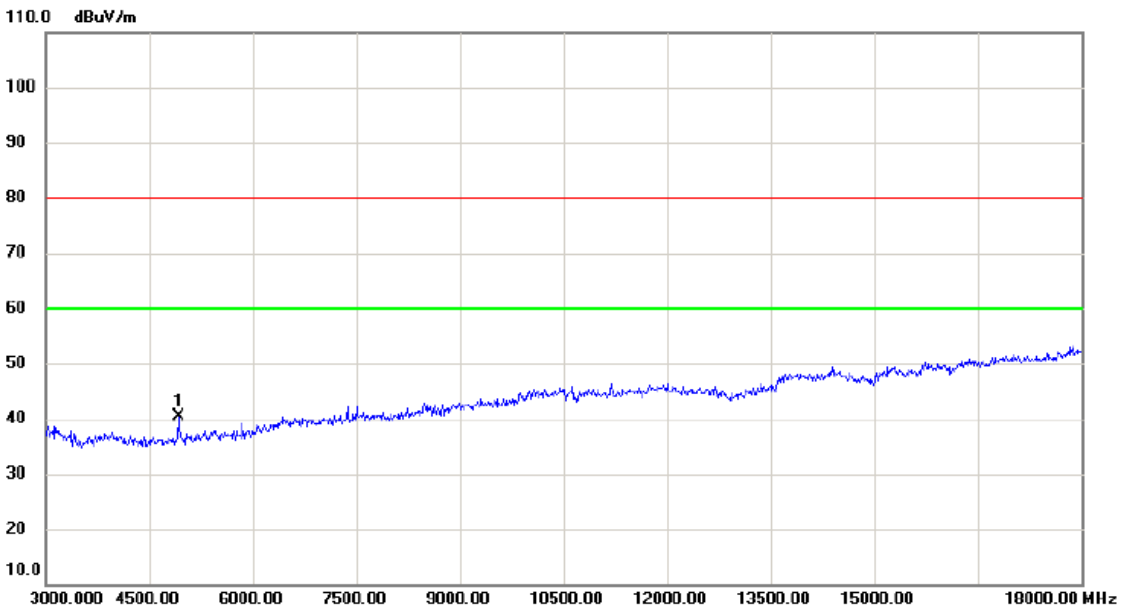

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4920.000	37.11	3.38	40.49	80.00	-39.51	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz_ANT 0+ ANT 1


Horizontal

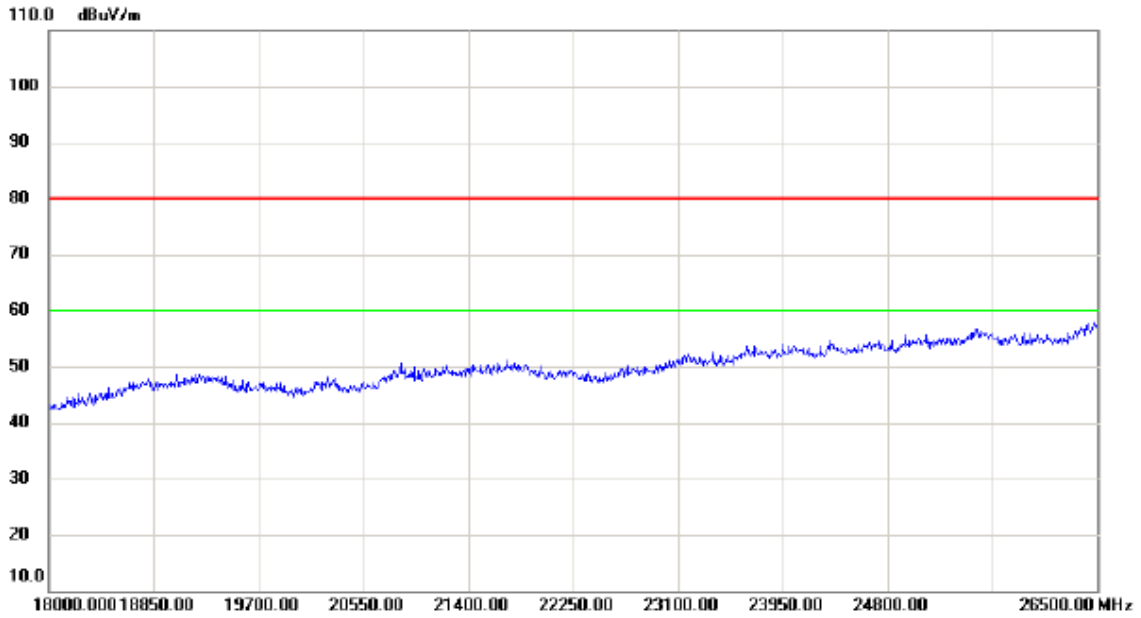

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0+ ANT 1


Vertical

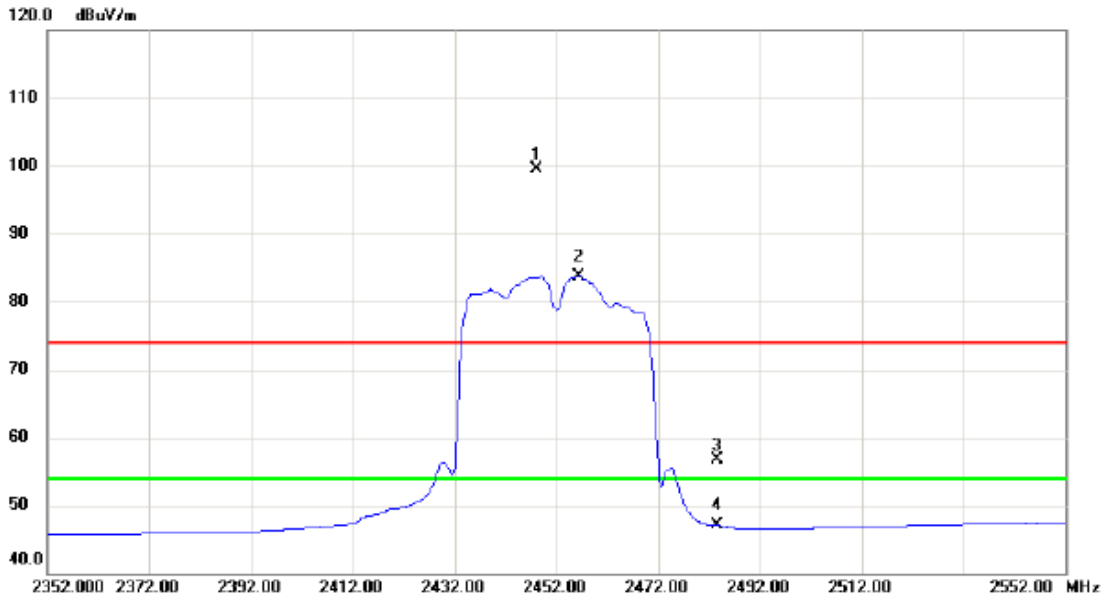


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2448.200	66.16	33.25	99.41	74.00	25.41	peak	No Limit
2	*	2456.400	50.39	33.29	83.68	54.00	29.68	AVG	No Limit
3		2483.500	23.25	33.40	56.65	74.00	-17.35	peak	
4		2483.500	13.64	33.40	47.04	54.00	-6.96	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0+ ANT 1

Vertical

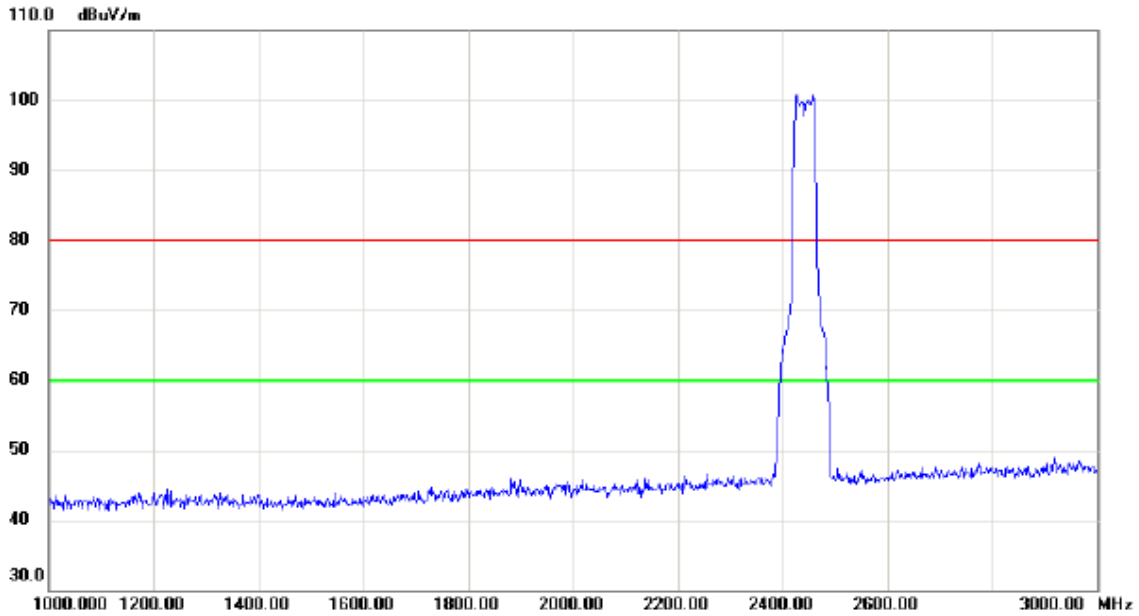


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

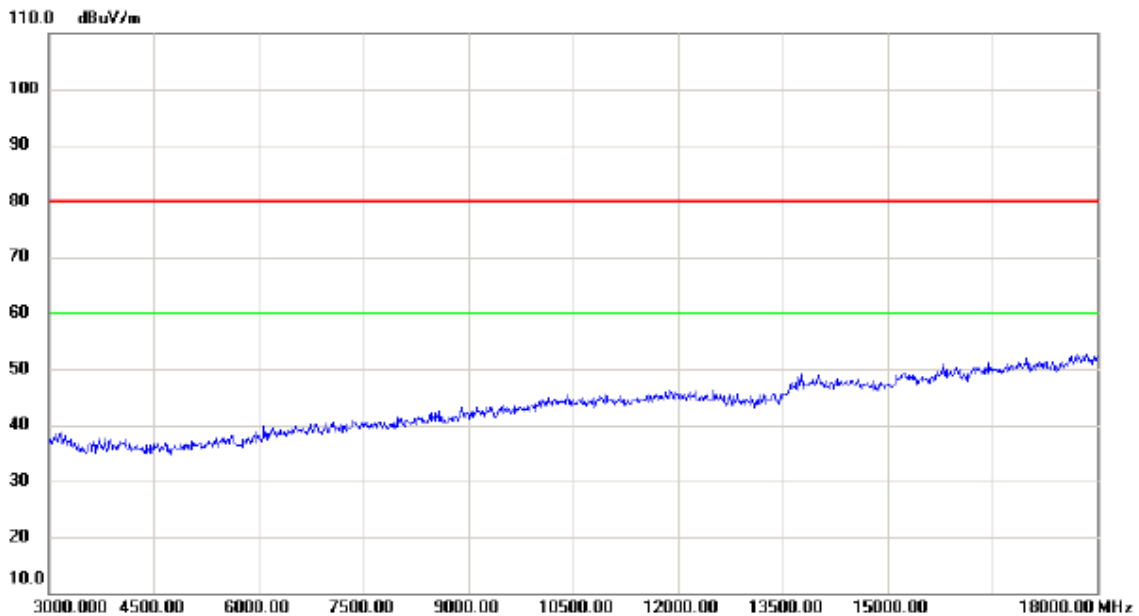

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0+ ANT 1


Vertical

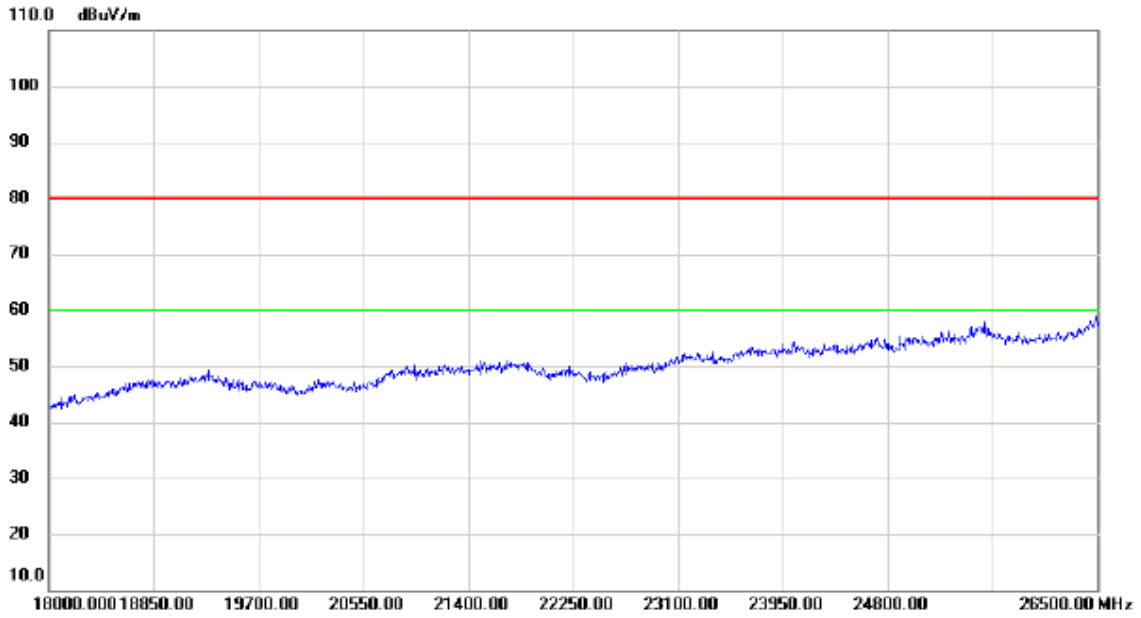

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0+ ANT 1


Horizontal

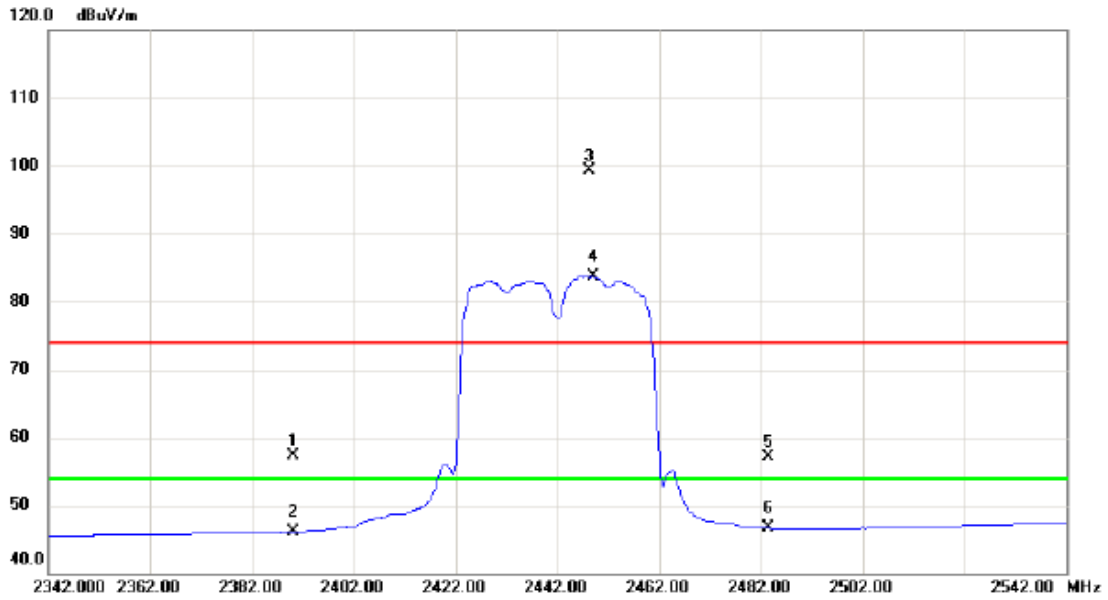


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	24.27	33.01	57.28	74.00	-16.72	peak	
2		2390.000	13.06	33.01	46.07	54.00	-7.93	AVG	
3	X	2448.200	66.05	33.25	99.30	74.00	25.30	peak	No Limit
4	*	2449.000	50.46	33.26	83.72	54.00	29.72	AVG	No Limit
5		2483.500	23.63	33.40	57.03	74.00	-16.97	peak	
6		2483.500	13.21	33.40	46.61	54.00	-7.39	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0+ ANT 1

Horizontal

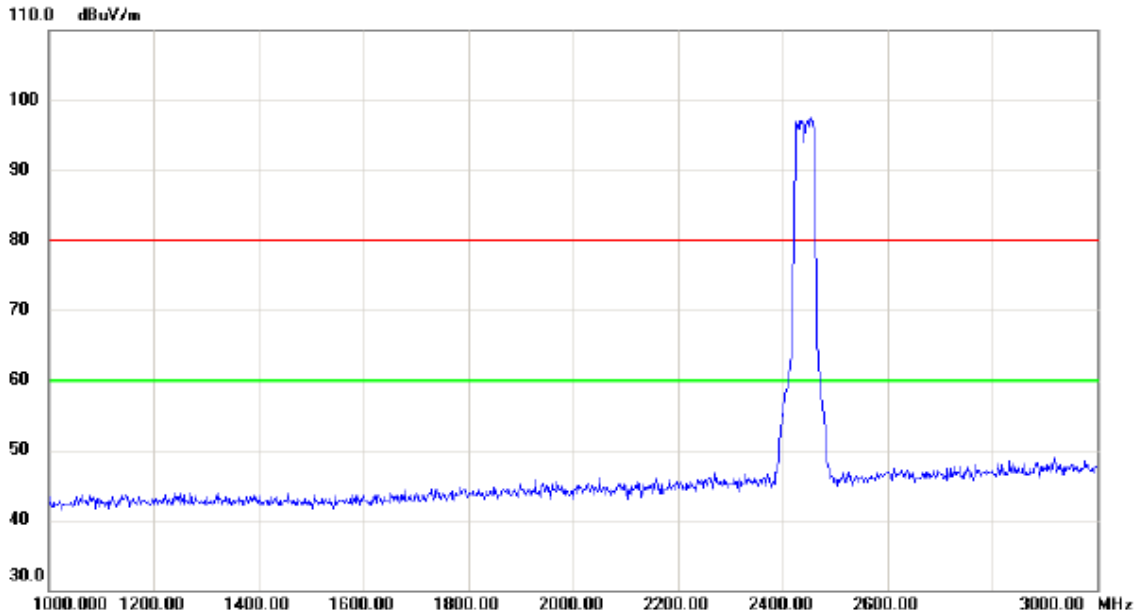


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

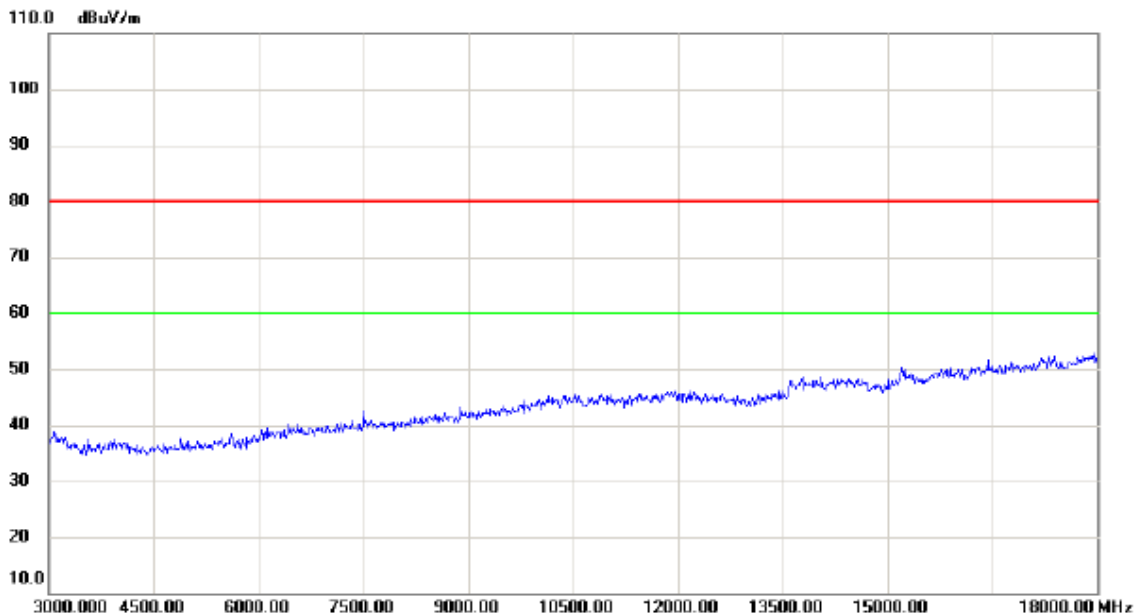

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2442MHz_ANT 0+ ANT 1


Horizontal

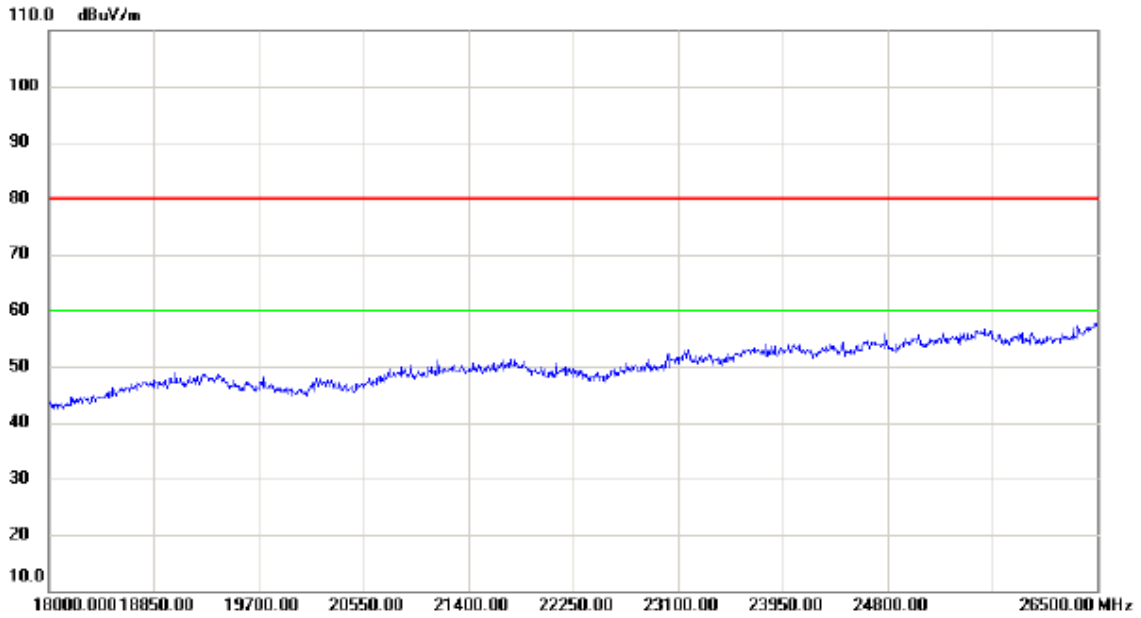

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0+ ANT 1


Vertical

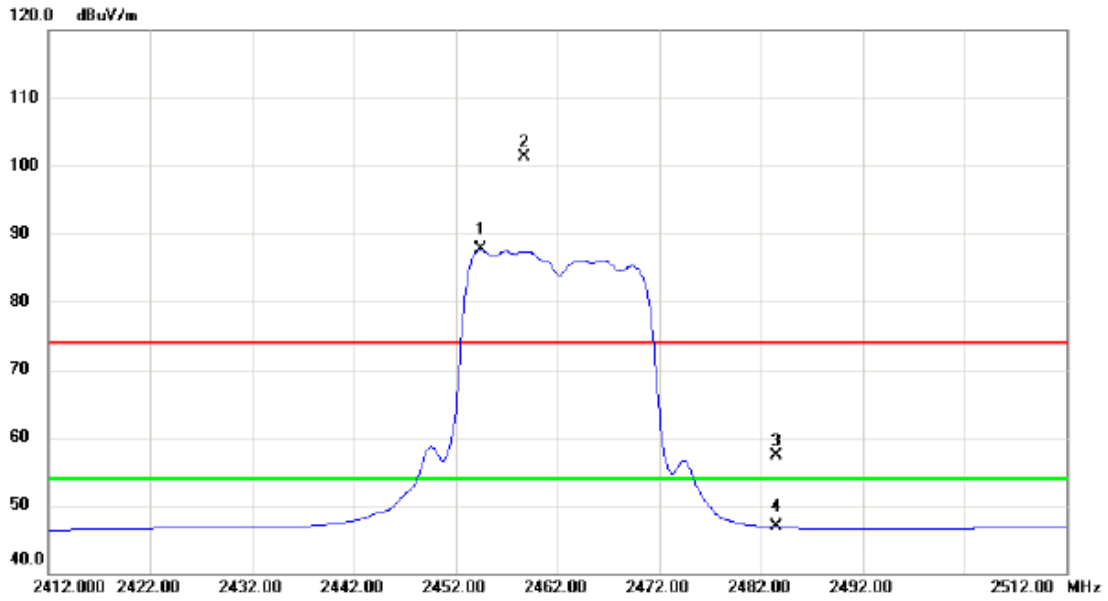


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.400	54.45	33.28	87.73	54.00	33.73	AVG	No Limit
2	X	2458.700	68.04	33.30	101.34	74.00	27.34	peak	No Limit
3		2483.500	23.99	33.40	57.39	74.00	-16.61	peak	
4		2483.500	13.42	33.40	46.82	54.00	-7.18	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0+ ANT 1

Vertical

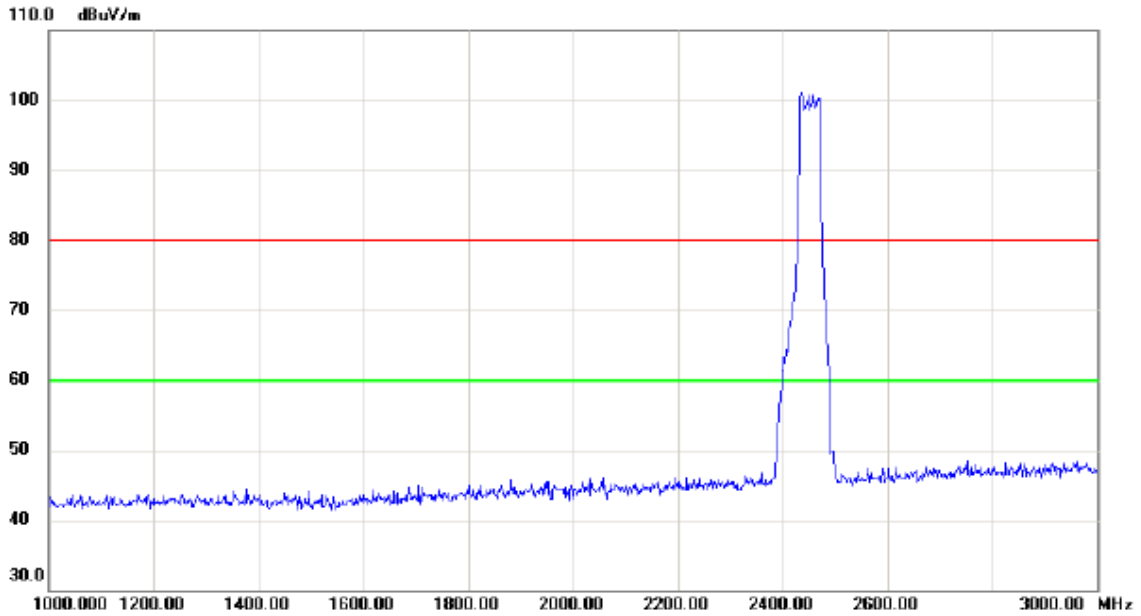


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

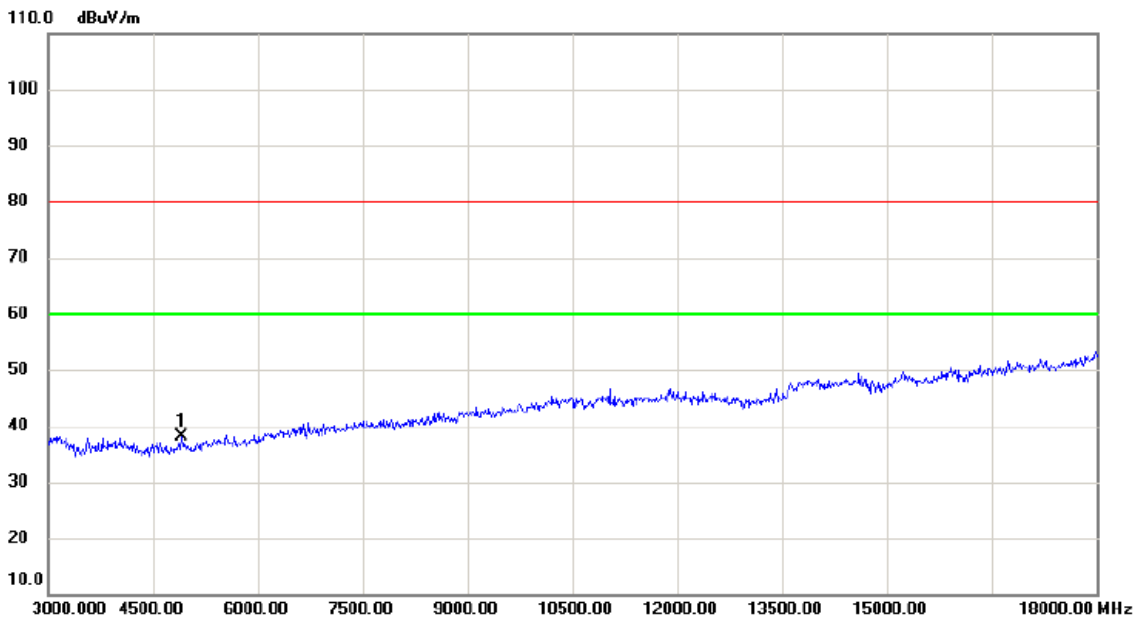

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4905.000	34.85	3.33	38.18	80.00	-41.82	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0+ ANT 1


Vertical

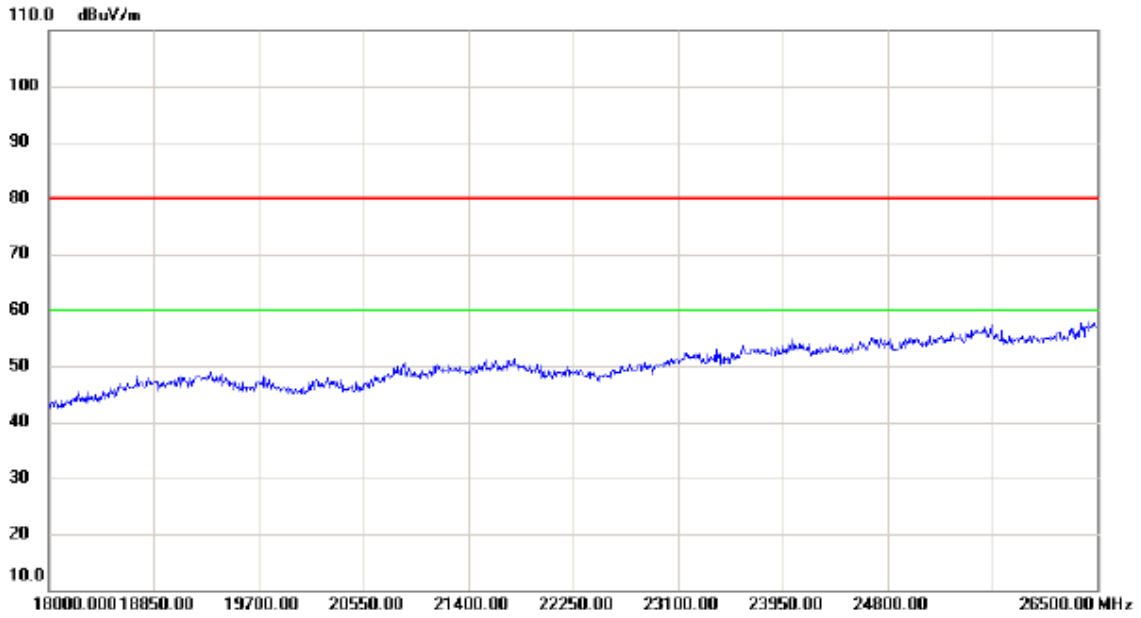

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0+ ANT 1


Horizontal

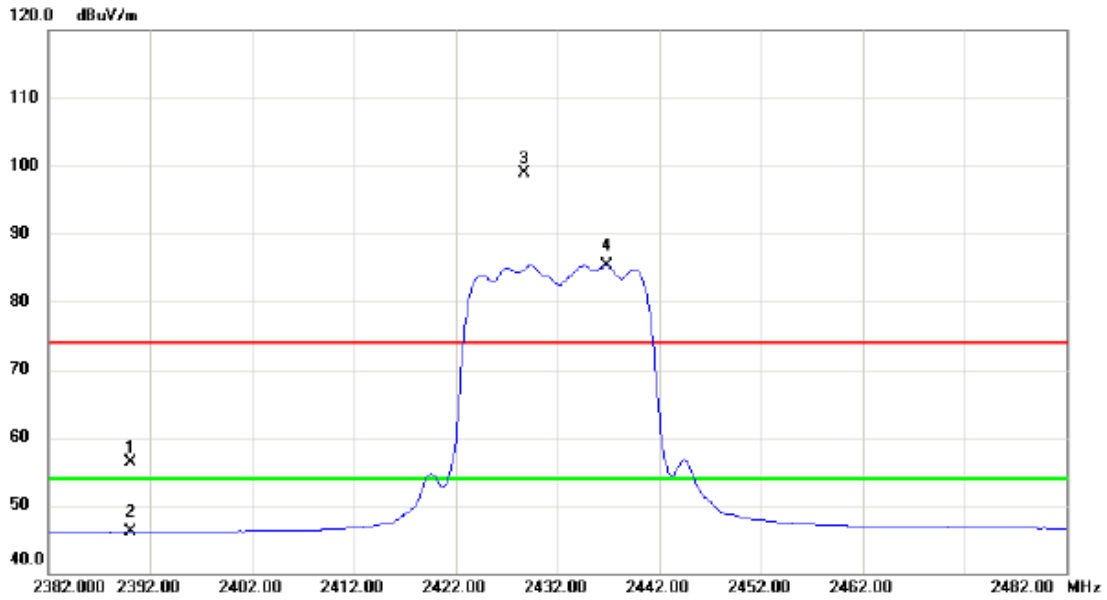


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.28	33.01	56.29	74.00	-17.71	peak	
2		2390.000	13.02	33.01	46.03	54.00	-7.97	AVG	
3	X	2428.700	65.78	33.17	98.95	74.00	24.95	peak	No Limit
4	*	2436.800	52.06	33.21	85.27	54.00	31.27	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0+ ANT 1

Horizontal

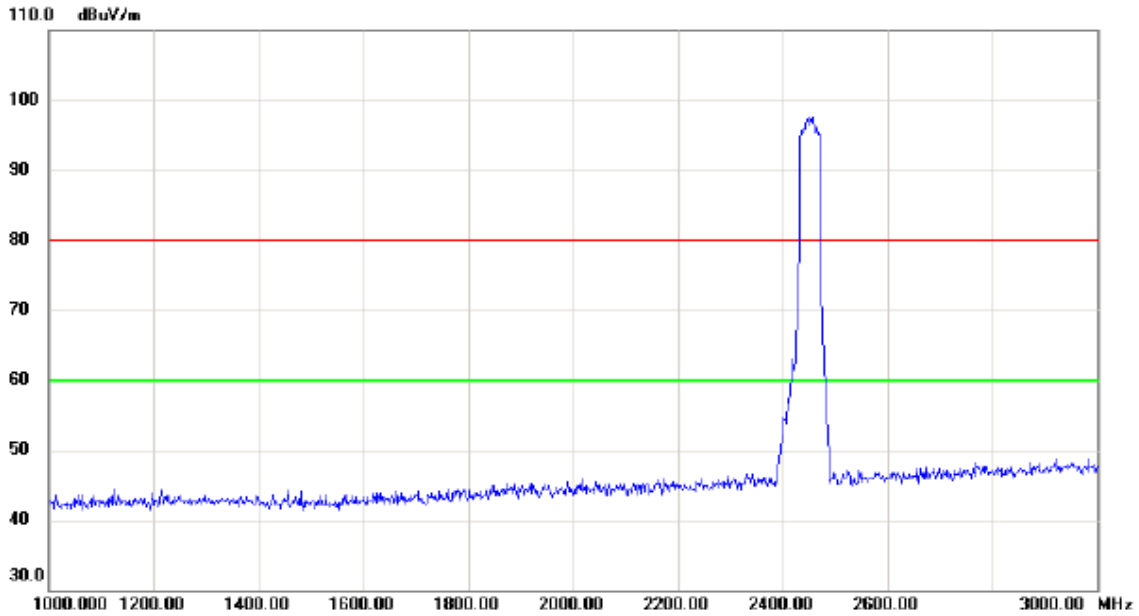


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

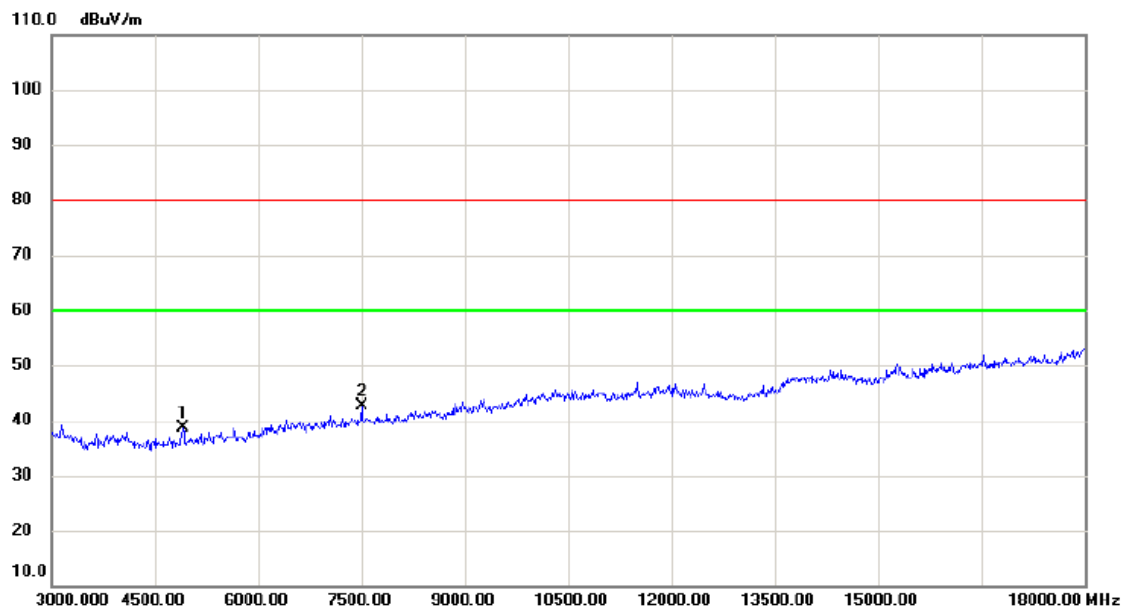

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4905.000	35.32	3.33	38.65	80.00	-41.35	peak	
2	*	7500.000	33.14	9.53	42.67	80.00	-37.33	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_ANT 0+ ANT 1

Horizontal

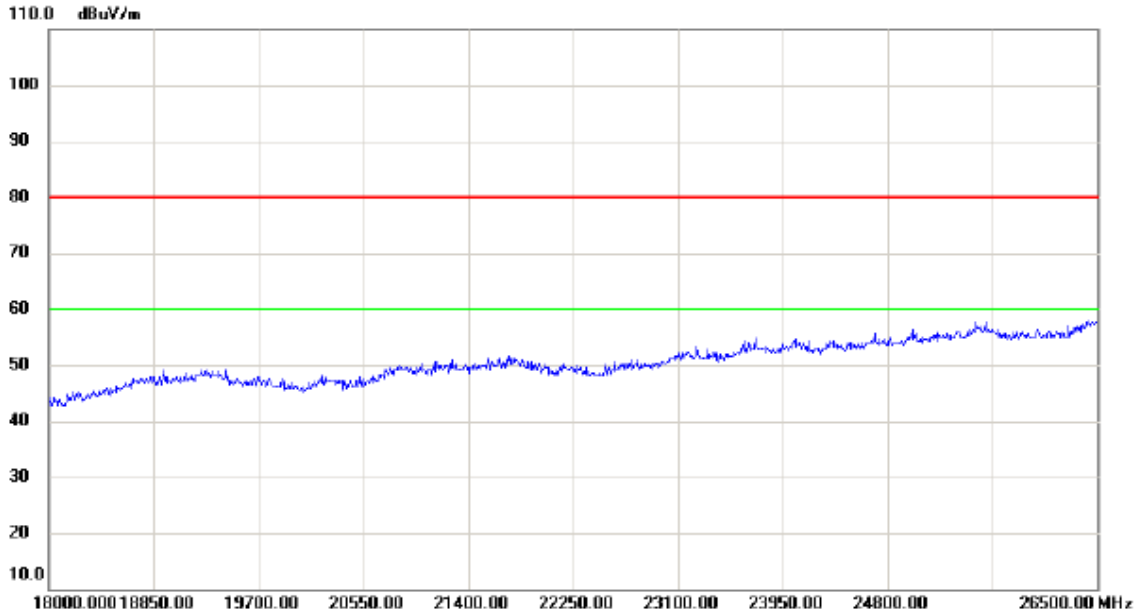

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		