

# FCC Radio Test Report

## FCC ID: QISB525S-65A

This report concerns (check one): Original Grant Class I Change Class II Change

**Project No.** : 1701C181A  
**Equipment** : LTE CPE  
**Model Name** : B525s-65a  
**Applicant** : Huawei Technologies Co. ,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen,518129, P.R.C

**Date of Receipt** : Feb. 21, 2017  
**Date of Test** : Feb. 21, 2017 ~ Mar. 02, 2017  
**Issued Date** : Mar. 03, 2017  
**Tested by** : BTL Inc.

**Testing Engineer** : Shawn Xiao  
(Shawn Xiao)

**Technical Manager** : David Mao  
(David Mao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--|-------------|
| <b>1 . CERTIFICATION</b>                                     | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY  | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 9           |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10          |
| 3.5 DESCRIPTION OF SUPPORT UNITS                             | 10          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>11</b>   |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 11          |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 11          |
| 4.1.2 TEST PROCEDURE   | 11          |
| 4.1.3 DEVIATION FROM TEST STANDARD                           | 11          |
| 4.1.4 TEST SETUP   | 12          |
| 4.1.5 EUT OPERATING CONDITIONS                               | 12          |
| 4.1.6 EUT TEST CONDITIONS                                    | 12          |
| 4.1.7 TEST RESULTS   | 12          |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 13          |
| 4.2.1 RADIATED EMISSION LIMITS                               | 13          |
| 4.2.2 TEST PROCEDURE   | 14          |
| 4.2.3 DEVIATION FROM TEST STANDARD                           | 14          |
| 4.2.4 TEST SETUP   | 14          |
| 4.2.5 EUT OPERATING CONDITIONS                               | 16          |
| 4.2.6 EUT TEST CONDITIONS                                    | 16          |
| 4.2.7 TEST RESULTS (9K TO 30MHz)                             | 17          |
| 4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)                  | 17          |
| 4.2.9 TEST RESULTS (ABOVE 1000 MHz)                          | 17          |
| <b>5 . MEASUREMENT INSTRUMENTS LIST</b>                      | <b>18</b>   |
| <b>ATTACHMENT A - CONDUCTED EMISSION</b>                     | <b>19</b>   |
| <b>ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>      | <b>24</b>   |
| <b>ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>   | <b>33</b>   |
| <b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>      | <b>42</b>   |

### REPORT ISSUED HISTORY

| Issued No.           | Description     | Issued Date   |
|----------------------|-----------------|---------------|
| BTL-FCCP-2-1701C181A | Original Issue. | Mar. 03, 2017 |

## 1. CERTIFICATION

Equipment : LTE CPE  
Brand Name : HUAWEI  
Model Name : B525s-65a  
Applicant : Huawei Technologies Co. ,Ltd.  
Manufacturer : Huawei Technologies Co. ,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen,518129, P.R.C  
Factory : Shenzhen Zowee Technology.co.,ltd  
Address : Shenzhen songgang town pond under chung industrial avenue with rich  
industrial area  
Date of Test : Feb. 21, 2017 ~ Mar. 02, 2017  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1701C181A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC Part15, Subpart E(15.407) |                                   |          |        |
|-------------------------------|-----------------------------------|----------|--------|
| Standard(s)<br>Section        | Test Item                         | Judgment | Remark |
| 15.207                        | AC Power Line Conducted Emissions | PASS     |        |
| 15.407(a)                     | Radiated Emissions                | PASS     |        |

**NOTE:**

(1) "N/A" denotes test is not applicable in this test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.  
 BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{CISPR}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02    | CISPR  | 150 KHz ~ 30MHz             | 1.94    |

### B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| DG-CB03   | CISPR  | 9kHz~30MHz                  | V          | 3.79    |
|           |        | 9kHz~30MHz                  | H          | 3.57    |
|           |        | 30MHz ~ 200MHz              | V          | 3.82    |
|           |        | 30MHz ~ 200MHz              | H          | 3.60    |
|           |        | 200MHz ~ 1,000MHz           | V          | 3.86    |
|           |        | 200MHz ~ 1,000MHz           | H          | 3.94    |
|           |        | 1GHz~18GHz                  | V          | 3.12    |
|           |        | 1GHz~18GHz                  | H          | 3.68    |
|           |        | 18GHz~40GHz                 | V          | 4.15    |
|           |        | 18GHz~40GHz                 | H          | 4.14    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                     |   |                      |
|---------------------|---|----------------------|
| Equipment           | LTE CPE   |                      |
| Brand Name          | HUAWEI  |                      |
| Model Name          | B525s-65a   |                      |
| Mode Different      | N/A   |                      |
| Product Description | Operation Frequency   | UNII-1: 5150-5250MHz |
|                     | Modulation Type   | OFDM                 |
| Power Source        | DC Voltage supplied from AC/DC adapter.<br>#1 Manufacturer / Model: Fu Hua / HW-120200U01(US)<br>#2 Manufacturer / Model: Ou Lu Tong / HW-120200U01(US) |                      |
| Power Rating        | DC12V 2A  |                      |
| HW Version          | WL1B525I  |                      |
| SW Version          | 11.232.08.DM.00   |                      |

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

3. Channel List:

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-1                                     |                 | UNII-1                          |                 | UNII-1         |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 36   | 5180            | 38                              | 5190            | 42             | 5210            |
| 40   | 5200            | 46                              | 5230            |                |                 |
| 44   | 5220            |                                 |                 |                |                 |
| 48   | 5240            |                                 |                 |                |                 |



### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                              |
|--------------|--|
| Mode 1       | TX A Mode / CH36, CH40, CH48 (UNII-1)    |
| Mode 2       | TX N20 Mode / CH36, CH40, CH48 (UNII-1)  |
| Mode 3       | TX N40 Mode / CH38, CH46 (UNII-1)        |
| Mode 4       | TX AC20 Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 5       | TX AC40 Mode / CH38, CH46 (UNII-1)       |
| Mode 6       | TX AC80 Mode / CH42 (UNII-1)             |
| Mode 7       | TX Mode                                  |

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


| For Conducted Test |             |
|--------------------|-------------|
| Final Test Mode    | Description |
| Mode 7             | TX Mode     |

| For Radiated Test |  |
|-------------------|--|
| Final Test Mode   | Description                              |
| Mode 1            | TX A Mode / CH36, CH40, CH48 (UNII-1)    |
| Mode 2            | TX N20 Mode / CH36, CH40, CH48 (UNII-1)  |
| Mode 3            | TX N40 Mode / CH38, CH46 (UNII-1)        |
| Mode 4            | TX AC20 Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 5            | TX AC40 Mode / CH38, CH46 (UNII-1)       |
| Mode 6            | TX AC80 Mode / CH42 (UNII-1)             |

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

**3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

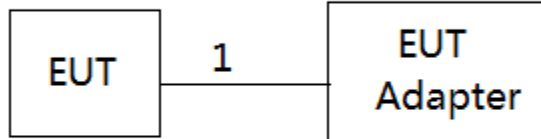

**3.5 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. |
|------|-----------|-----------|----------------|--------|------------|
| -    | -         | -         | -              | -      | -          |

| Item | Shielded Type | Ferrite Core | Length | Note     |
|------|---------------|--------------|--------|----------|
| 1    | NO            | NO           | 1.5m   | AC Cable |

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

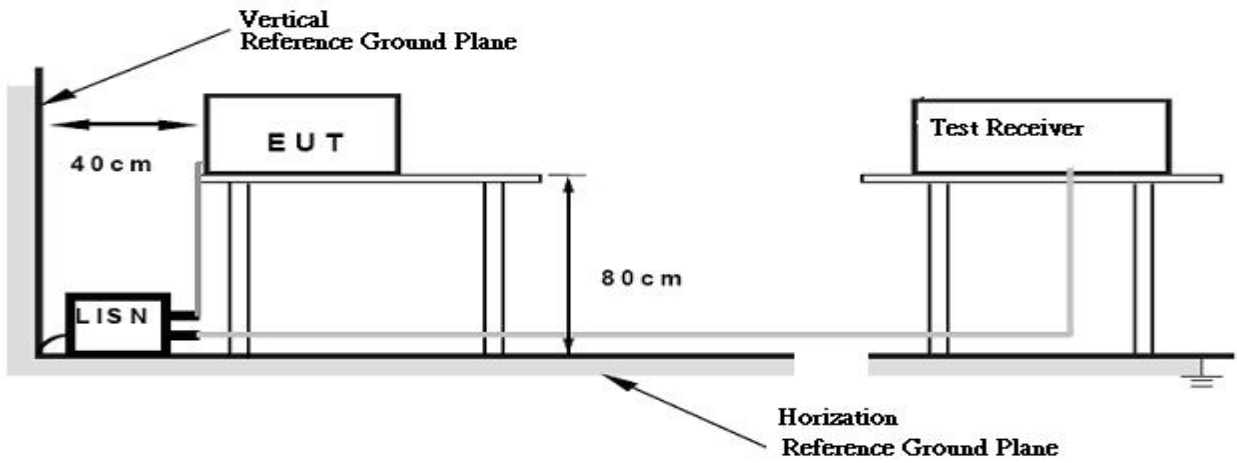

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 23°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microrvolts/meter) | Measurement Distance (meters) |
|-------------------|------------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(kHz)                        | 300                           |
| 0.490~1.705       | 24000/F(kHz)                       | 30                            |
| 1.705~30.0        | 30                                 | 30                            |
| 30~88             | 100                                | 3                             |
| 88~216            | 150                                | 3                             |
| 216~960           | 200                                | 3                             |
| Above 960         | 500                                | 3                             |

| Frequencies (MHz) | EIRP Limit (dBm) | Band edge at 3m (dBμV/m) | Harmonic at 1.5m (dBμV/m) |
|-------------------|------------------|--------------------------|---------------------------|
| 5150-5250         | -27              | 68.3                     | 74.3 (Note 3)             |
| 5250-5350         | -27              | 68.3                     | 74.3 (Note 3)             |
| 5470-5725         | -27              | 68.3                     | 74.3 (Note 3)             |
| 5725-5850         | -27(Note 2)      | 68.3                     | 74.3 (Note 3)             |
|                   | 10(Note 2)       | 105.3                    | 111.3(Note 3)             |
|                   | 15.6(Note 2)     | 110.9                    | 116.9(Note 3)             |
|                   | 27(Note 2)       | 122.3                    | 128.3(Note 3)             |

Note:

- The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:  $E = \frac{1000000 \cdot \sqrt{30P}}{3}$  μV/m, where P is the eirp (Watts)
- According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

- $$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left( \frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{dB}$$

#### 4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD

No deviation


#### 4.2.4 TEST SETUP

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

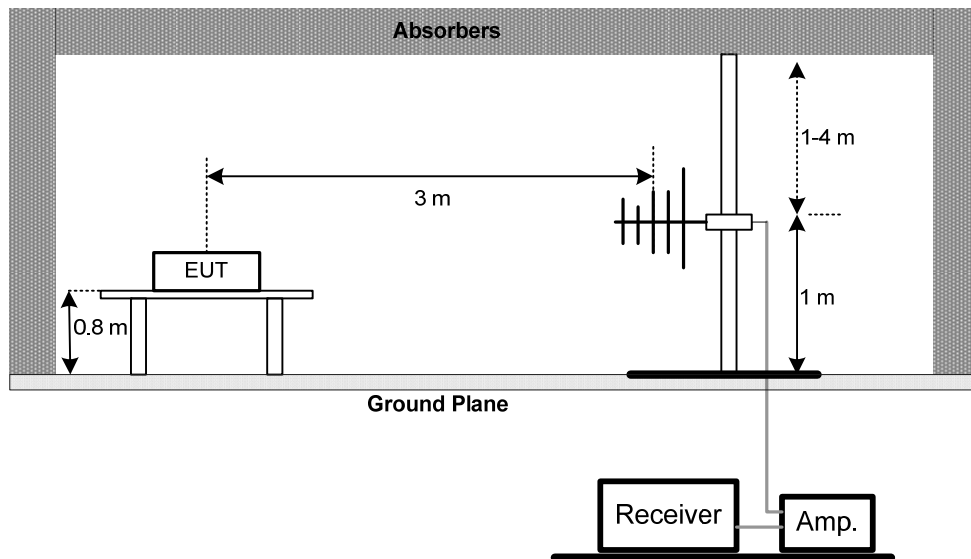


**(B) Radiated Emission Test Set-Up Frequency Above 1 GHz**


**Band edge**

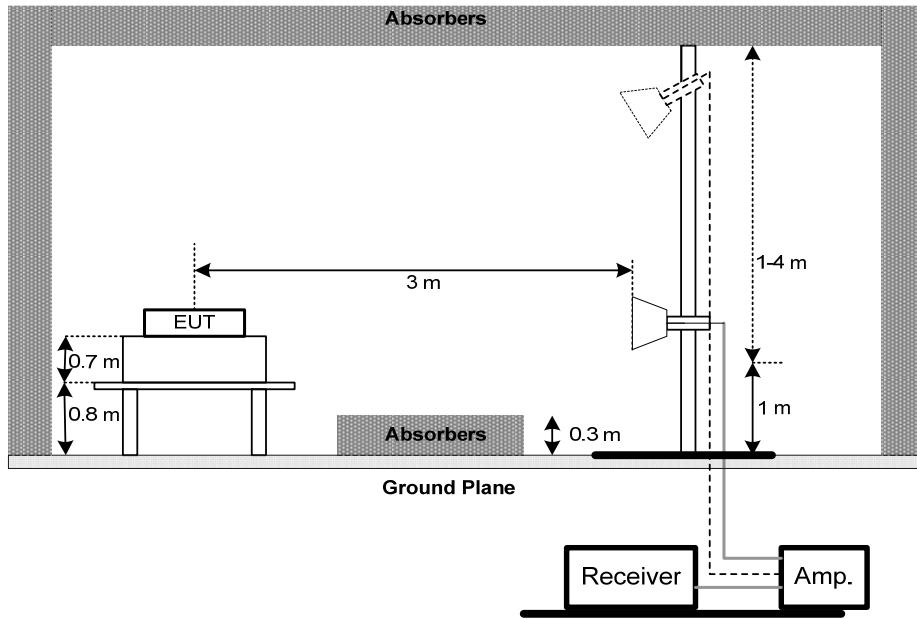

**Harmonic**

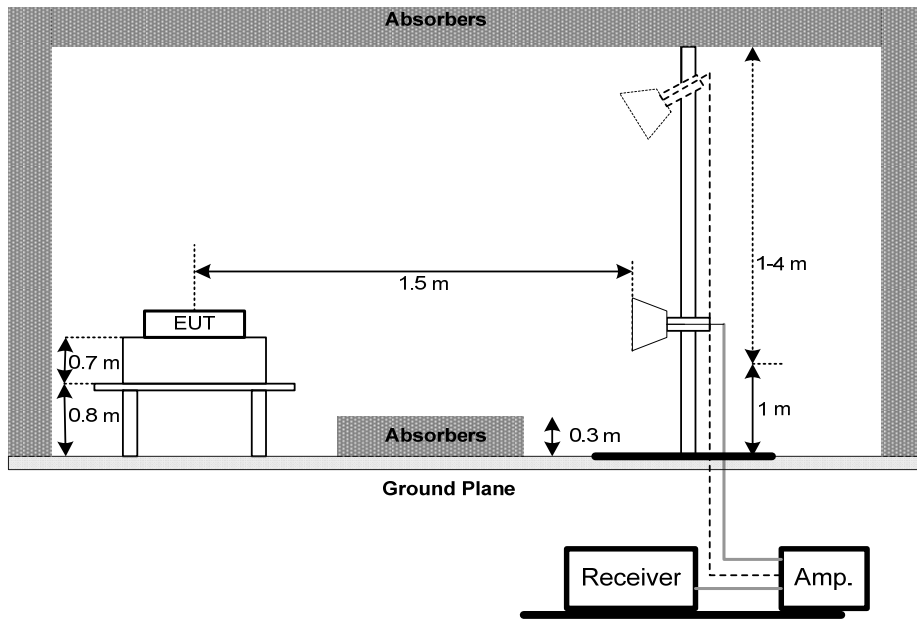

(C) Radiated emissions below 30MHz

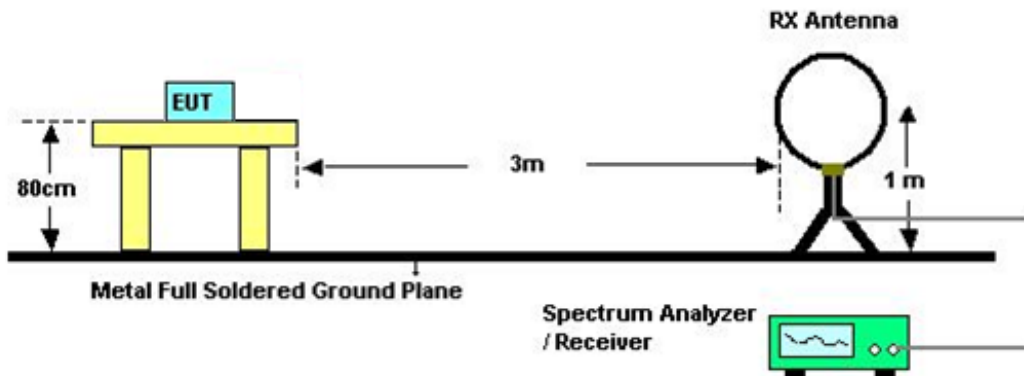

**4.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

**4.2.6 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz



#### **4.2.7 TEST RESULTS (9K TO 30MHz)**

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log$  (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)**

Please refer to the Attachment C.

#### **4.2.9 TEST RESULTS (ABOVE 1000 MHz)**

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. MEASUREMENT INSTRUMENTS LIST

| Conducted Emission Measurement |                      |              |                       |            |                  |
|--------------------------------|----------------------|--------------|-----------------------|------------|------------------|
| Item                           | Kind of Equipment    | Manufacturer | Type No.              | Serial No. | Calibrated until |
| 1                              | LISN                 | EMCO         | 3816/2                | 0052765    | Mar. 27, 2017    |
| 2                              | LISN                 | R&S          | ENV216                | 101447     | Mar. 27, 2017    |
| 3                              | Test Cable           | emci         | RG223(9KHz-30 MHz)    | C_17       | Mar. 10, 2017    |
| 4                              | EMI Test Receiver    | R&S          | ESCI                  | 100382     | Mar. 27, 2017    |
| 5                              | 50Ω Terminator       | SHX          | TF2-3G-A              | 08122901   | Mar. 27, 2017    |
| 6                              | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A              |


| Radiated Emission Measurement |                                      |                |                                   |               |                  |
|-------------------------------|--------------------------------------|----------------|-----------------------------------|---------------|------------------|
| Item                          | Kind of Equipment                    | Manufacturer   | Type No.                          | Serial No.    | Calibrated until |
| 1                             | Antenna                              | Schwarzbeck    | VULB9160                          | 9160-3232     | Mar. 27, 2017    |
| 2                             | Amplifier                            | HP             | 8447D                             | 2944A09673    | Nov. 08, 2017    |
| 3                             | Receiver                             | AGILENT        | N9038A                            | MY52130039    | Oct. 10, 2017    |
| 4                             | Test Cable                           | emci           | LMR-400(30MHz-1GHz)               | C-01          | Jun. 26, 2017    |
| 5                             | Control                              | CT             | SC100                             | N/A           | N/A              |
| 6                             | Position Control                     | MF             | MF-7802                           | MF780208416   | N/A              |
| 7                             | Antenna                              | ETS            | 3115                              | 00075789      | Mar. 27, 2017    |
| 8                             | Amplifier                            | Agilent        | 8449B                             | 3008A02274    | Nov. 01, 2017    |
| 9                             | Receiver                             | AGILENT        | N9038A                            | MY52130039    | Oct. 10, 2017    |
| 10                            | Test Cable                           | emci           | EMC104-SM-S M-10000(1GHz-26.5GHz) | C-68          | Jun. 26, 2017    |
| 11                            | Controller                           | CT             | SC100                             | N/A           | N/A              |
| 12                            | Broad-Band Horn Antenna              | Schwarzbeck    | BBHA 9170                         | 9170319       | Apr. 23, 2017    |
| 13                            | Microwave Pre-amplifier With Adaptor | EMC INSTRUMENT | EMC2654045                        | 980039 & HA01 | Mar. 27, 2017    |
| 14                            | Active Loop Antenna                  | R&S            | HFH2-Z2                           | 830749/020    | Sep. 06, 2017    |
| 15                            | Measurement Software                 | Farad          | EZ-EMC Ver.NB-03A1-01             | N/A           | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX MODE\_Adapter:Fu Hua

**Line**

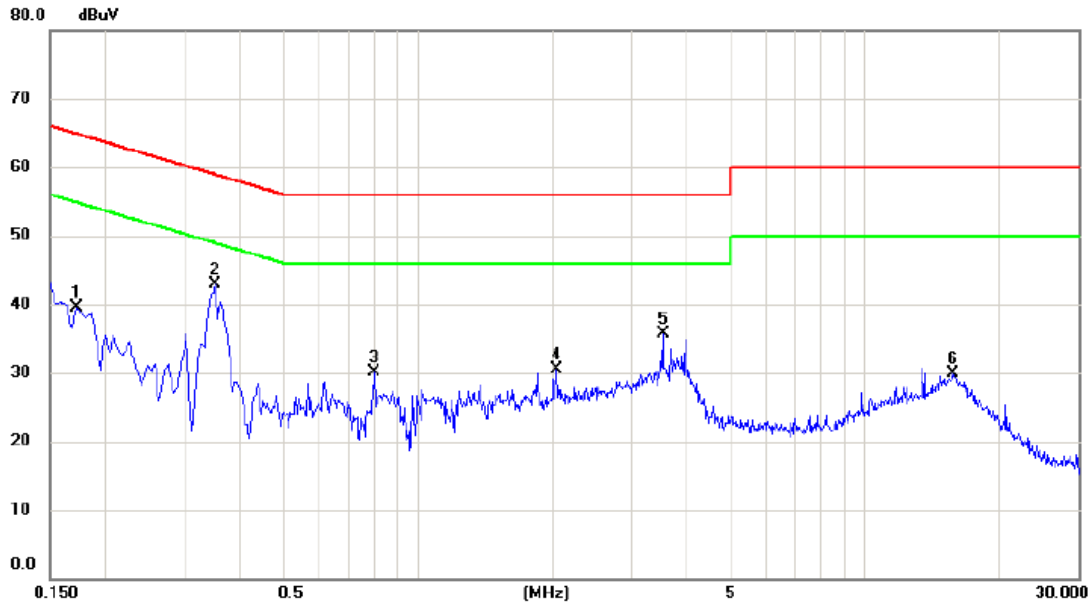


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1725       | 29.84                    | 9.57                    | 39.41                    | 64.84         | -25.43       | peak     |         |
| 2   | *   | 0.3525       | 33.39                    | 9.58                    | 42.97                    | 58.90         | -15.93       | peak     |         |
| 3   |     | 0.7980       | 20.32                    | 9.82                    | 30.14                    | 56.00         | -25.86       | peak     |         |
| 4   |     | 2.0400       | 20.45                    | 10.03                   | 30.48                    | 56.00         | -25.52       | peak     |         |
| 5   |     | 3.5430       | 25.29                    | 10.33                   | 35.62                    | 56.00         | -20.38       | peak     |         |
| 6   |     | 15.6705      | 19.17                    | 10.71                   | 29.88                    | 60.00         | -30.12       | peak     |         |

Note : The test result has included the cable loss.

Test Mode: TX MODE\_Adapter:Fu Hua

### Neutral

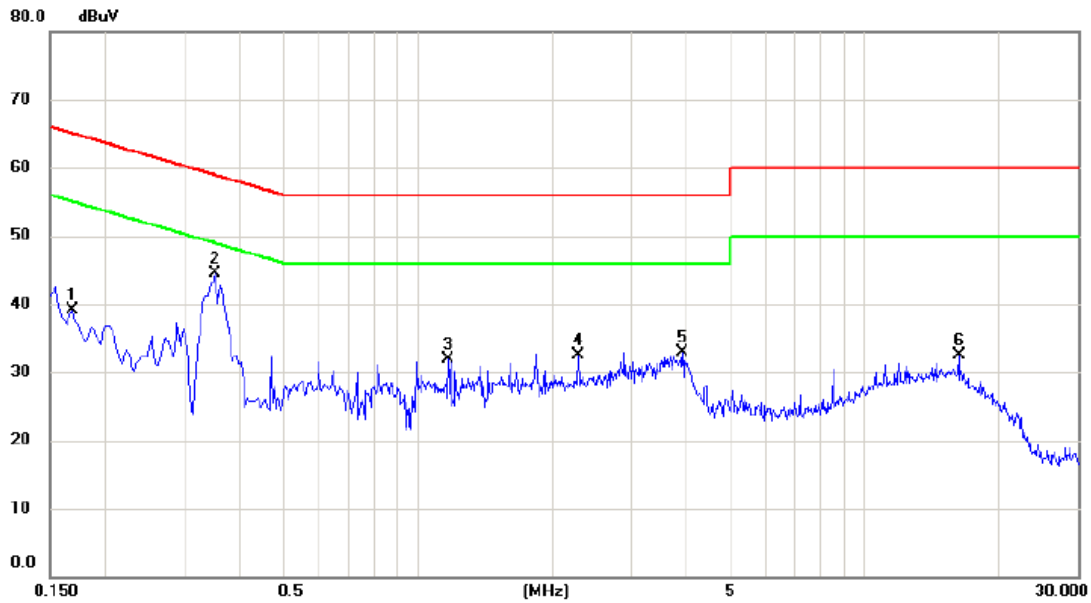


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1680       | 29.57                    | 9.48                    | 39.05                    | 65.06         | -26.01       | peak     |         |
| 2   | *   | 0.3524       | 34.83                    | 9.58                    | 44.41                    | 58.91         | -14.50       | peak     |         |
| 3   |     | 1.1670       | 22.20                    | 9.75                    | 31.95                    | 56.00         | -24.05       | peak     |         |
| 4   |     | 2.2874       | 22.61                    | 9.88                    | 32.49                    | 56.00         | -23.51       | peak     |         |
| 5   |     | 3.9165       | 22.82                    | 10.08                   | 32.90                    | 56.00         | -23.10       | peak     |         |
| 6   |     | 16.2780      | 21.65                    | 10.76                   | 32.41                    | 60.00         | -27.59       | peak     |         |

Note : The test result has included the cable loss.

Test Mode: TX MODE\_Adapter:Ou Lu Tong

Line

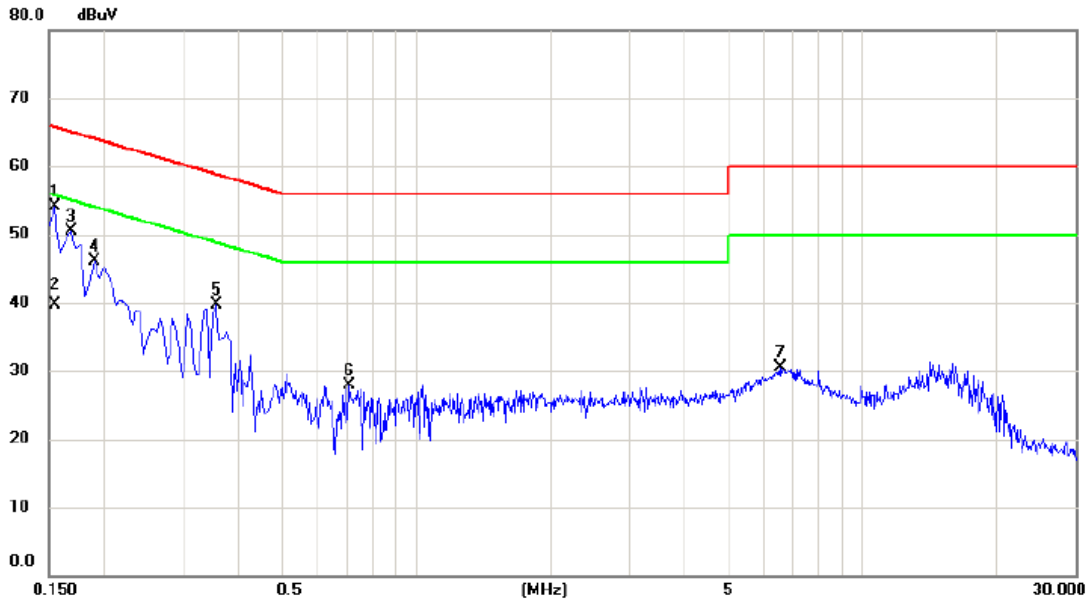


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.1545       | 44.60                    | 9.57                    | 54.17                    | 65.75         | -11.58       | peak     |         |
| 2   |     | 0.1545       | 30.20                    | 9.57                    | 39.77                    | 55.75         | -15.98       | AVG      |         |
| 3   |     | 0.1680       | 41.00                    | 9.57                    | 50.57                    | 65.06         | -14.49       | peak     |         |
| 4   |     | 0.1905       | 36.45                    | 9.57                    | 46.02                    | 64.01         | -17.99       | peak     |         |
| 5   |     | 0.3570       | 30.06                    | 9.58                    | 39.64                    | 58.80         | -19.16       | peak     |         |
| 6   |     | 0.7080       | 18.24                    | 9.72                    | 27.96                    | 56.00         | -28.04       | peak     |         |
| 7   |     | 6.5445       | 20.13                    | 10.38                   | 30.51                    | 60.00         | -29.49       | peak     |         |

Note : The test result has included the cable loss.

Test Mode: TX MODE\_Adapter:Ou Lu Tong

### Neutral

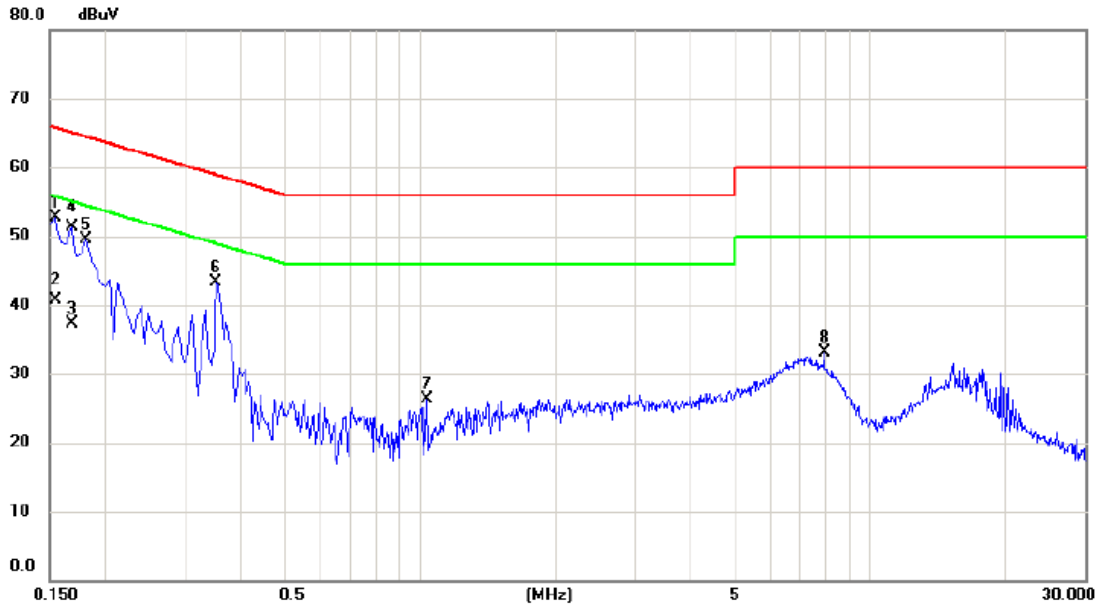

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1545       | 43.09                    | 9.55                    | 52.64                    | 65.75         | -13.11       | peak     |         |
| 2   |     | 0.1545       | 31.09                    | 9.55                    | 40.64                    | 55.75         | -15.11       | AVG      |         |
| 3   |     | 0.1680       | 27.73                    | 9.48                    | 37.21                    | 65.06         | -27.85       | peak     |         |
| 4   | *   | 0.1680       | 41.73                    | 9.48                    | 51.21                    | 55.06         | -3.85        | AVG      |         |
| 5   |     | 0.1815       | 40.02                    | 9.51                    | 49.53                    | 64.42         | -14.89       | peak     |         |
| 6   |     | 0.3525       | 33.81                    | 9.57                    | 43.38                    | 58.90         | -15.52       | peak     |         |
| 7   |     | 1.0365       | 16.53                    | 9.74                    | 26.27                    | 56.00         | -29.73       | peak     |         |
| 8   |     | 7.9260       | 22.82                    | 10.32                   | 33.14                    | 60.00         | -26.86       | peak     |         |


Note : The test result has included the cable loss.

**ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)**



Test Mode: TX MODE\_Adapter:Fu Hua


**Ant 0°**

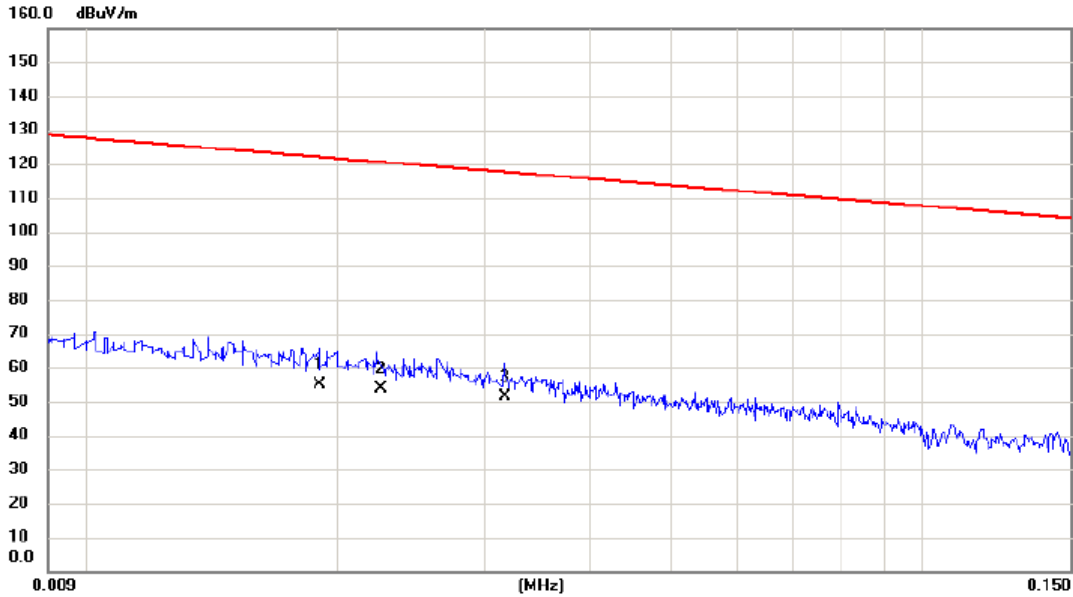

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   |     | 0.0190 | 31.31         | 23.58          | 54.89       | 122.03 | -67.14 | AVG      |         |
| 2   |     | 0.0225 | 30.45         | 23.21          | 53.66       | 120.56 | -66.90 | AVG      |         |
| 3   | *   | 0.0317 | 29.16         | 22.08          | 51.24       | 117.58 | -66.34 | AVG      |         |

Test Mode: TX MODE\_Adapter:Fu Hua


Ant 0°

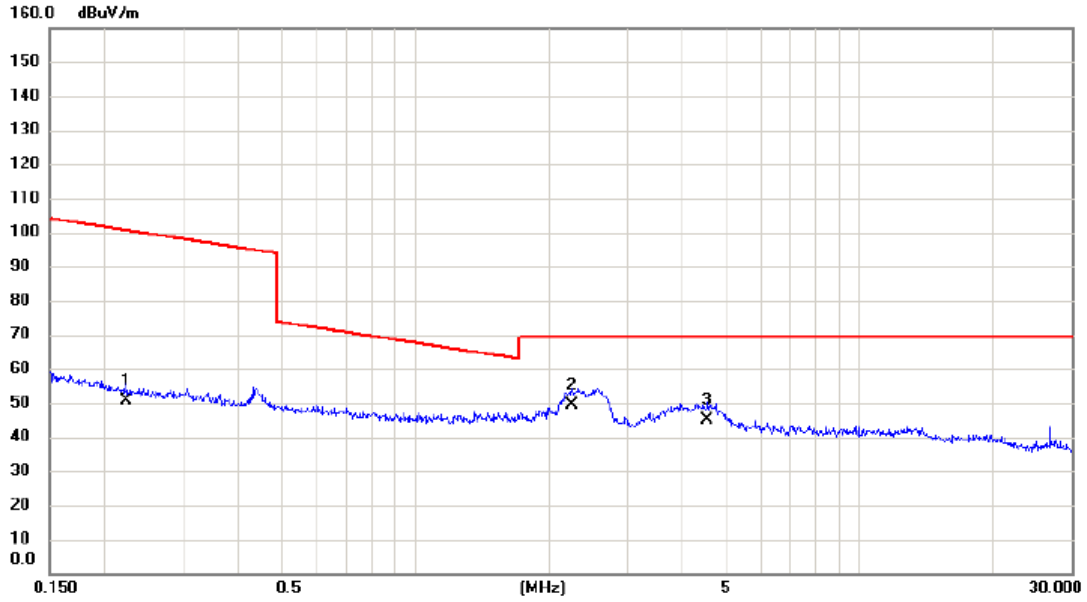

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.2243       | 32.02                    | 18.68                   | 50.70                      | 100.59          | -49.89       | AVG      |         |
| 2   | *   | 2.2486       | 31.66                    | 17.59                   | 49.25                      | 69.54           | -20.29       | QP       |         |
| 3   |     | 4.5254       | 27.50                    | 17.67                   | 45.17                      | 69.54           | -24.37       | QP       |         |

Test Mode: TX MODE\_Adapter:Fu Hua


**Ant 90°**

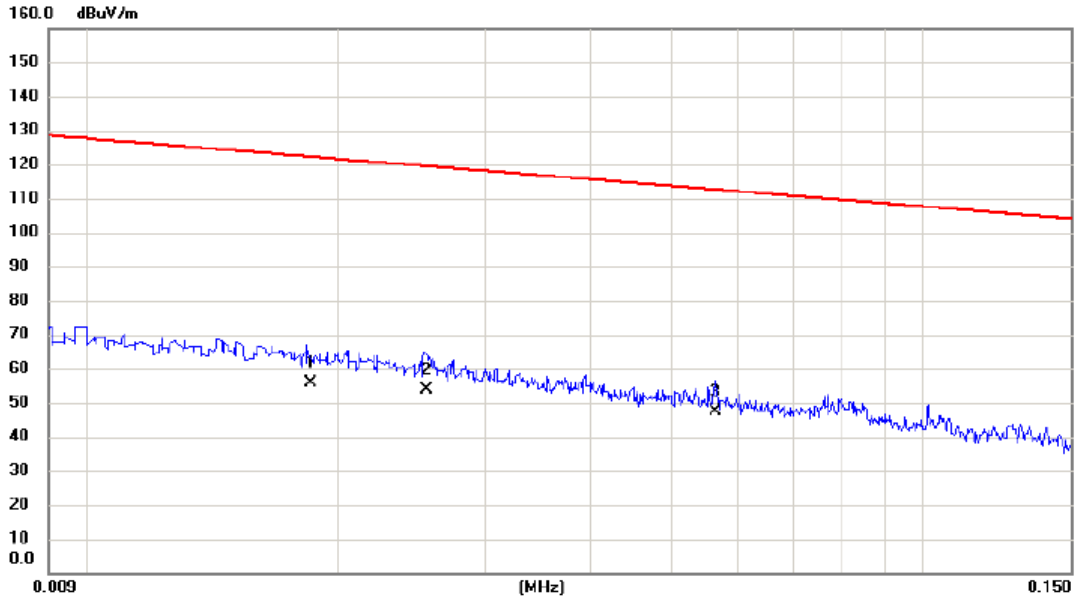

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.0185       | 32.23                    | 23.61                   | 55.84                      | 122.26          | -66.42       | AVG      |         |
| 2   |     | 0.0255       | 31.08                    | 22.84                   | 53.92                      | 119.47          | -65.55       | AVG      |         |
| 3   | *   | 0.0565       | 27.73                    | 19.75                   | 47.48                      | 112.56          | -65.08       | AVG      |         |

Test Mode: TX MODE\_Adapter:Fu Hua


**Ant 90°**

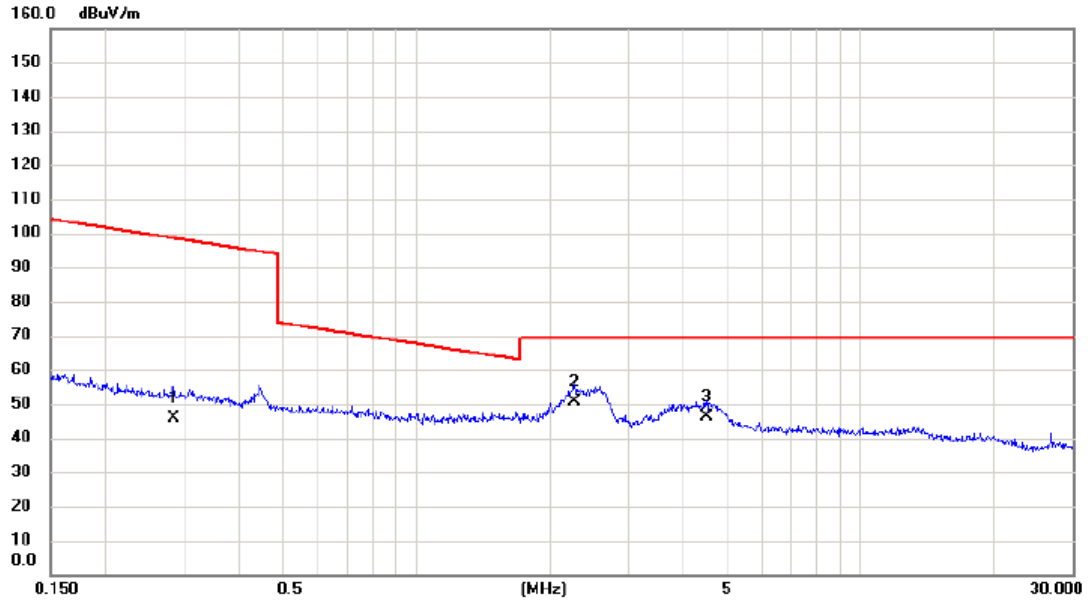

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.2833       | 27.34                    | 18.61                   | 45.95                      | 98.56           | -52.61       | AVG      |         |
| 2   | *   | 2.2726       | 33.19                    | 17.56                   | 50.75                      | 69.54           | -18.79       | QP       |         |
| 3   |     | 4.5015       | 28.47                    | 17.72                   | 46.19                      | 69.54           | -23.35       | QP       |         |

Test Mode: TX MODE\_Adapter:Ou Lu Tong


**Ant 0°**

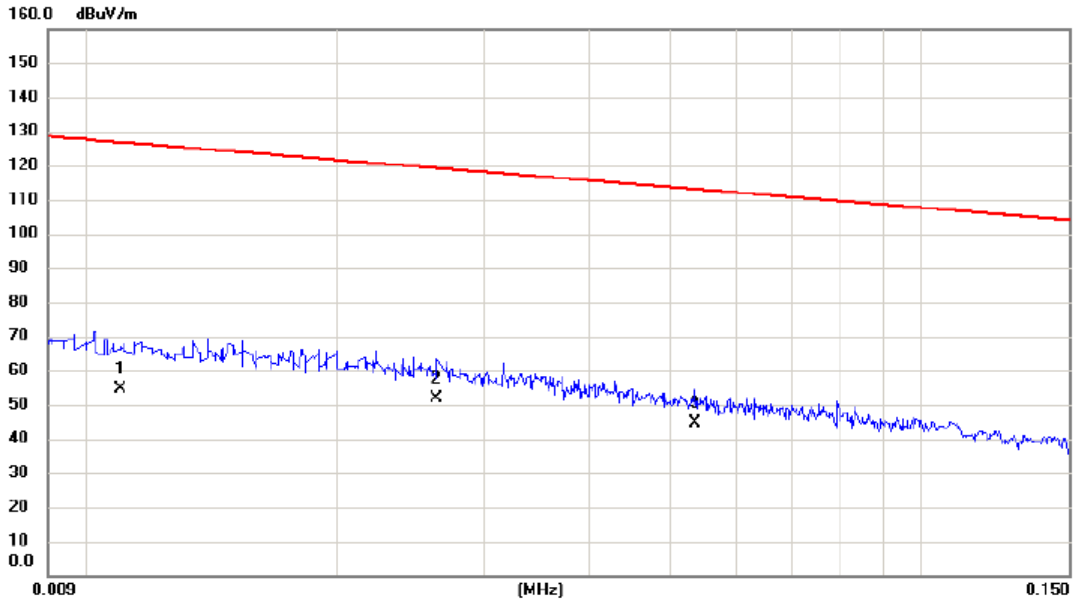

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.0110       | 30.54                    | 24.06                   | 54.60                      | 126.78          | -72.18       | AVG      |         |
| 2   | *   | 0.0263       | 28.91                    | 22.74                   | 51.65                      | 119.21          | -67.56       | AVG      |         |
| 3   |     | 0.0536       | 24.63                    | 19.78                   | 44.41                      | 113.02          | -68.61       | AVG      |         |

Test Mode: TX MODE\_Adapter:Ou Lu Tong


**Ant 0°**

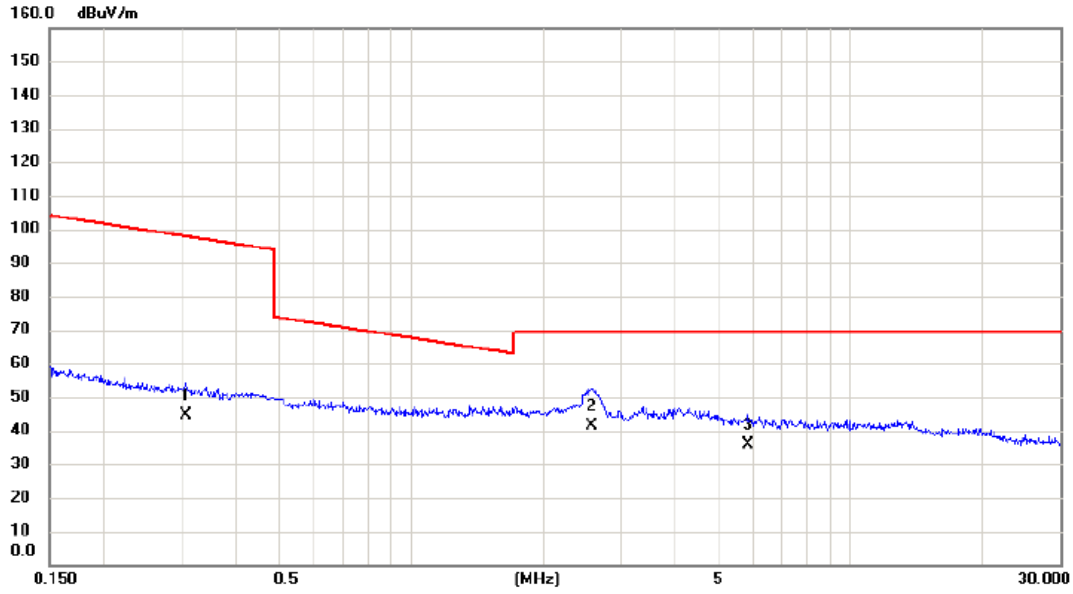

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.3082       | 25.83                    | 18.58                   | 44.41                      | 97.83           | -53.42       | AVG      |         |
| 2   | *   | 2.5807       | 24.16                    | 17.17                   | 41.33                      | 69.54           | -28.21       | QP       |         |
| 3   |     | 5.8357       | 19.22                    | 16.54                   | 35.76                      | 69.54           | -33.78       | QP       |         |

Test Mode: TX MODE\_Adapter:Ou Lu Tong


**Ant 90°**

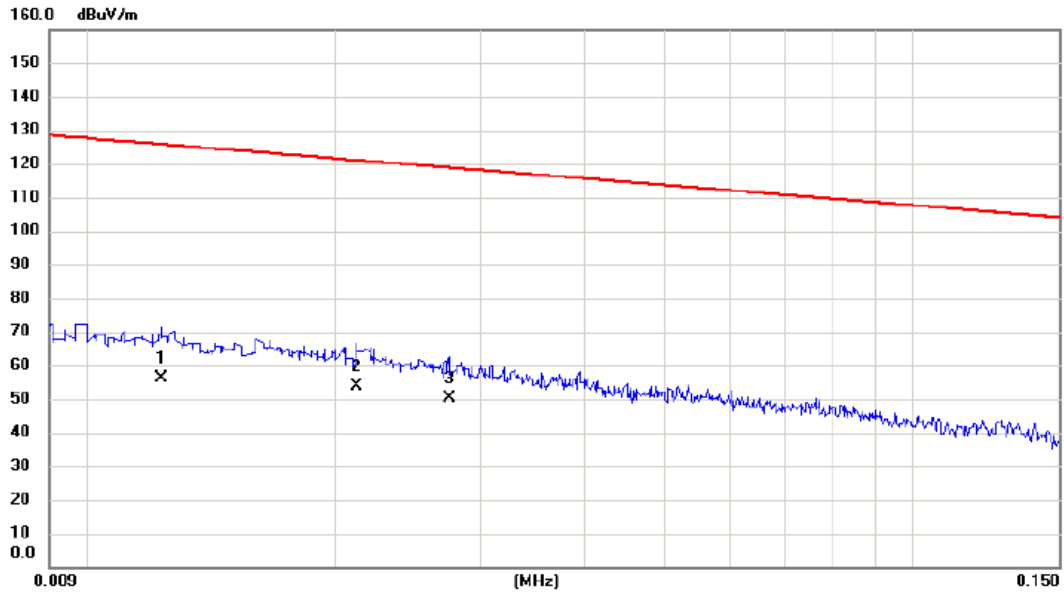

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.0123       | 32.11                    | 23.98                   | 56.09                      | 125.81          | -69.72       | AVG      |         |
| 2   | *   | 0.0212       | 30.32                    | 23.37                   | 53.69                      | 121.08          | -67.39       | AVG      |         |
| 3   |     | 0.0275       | 27.81                    | 22.59                   | 50.40                      | 118.82          | -68.42       | AVG      |         |

Test Mode: TX MODE\_Adapter:Ou Lu Tong

**Ant 90°**

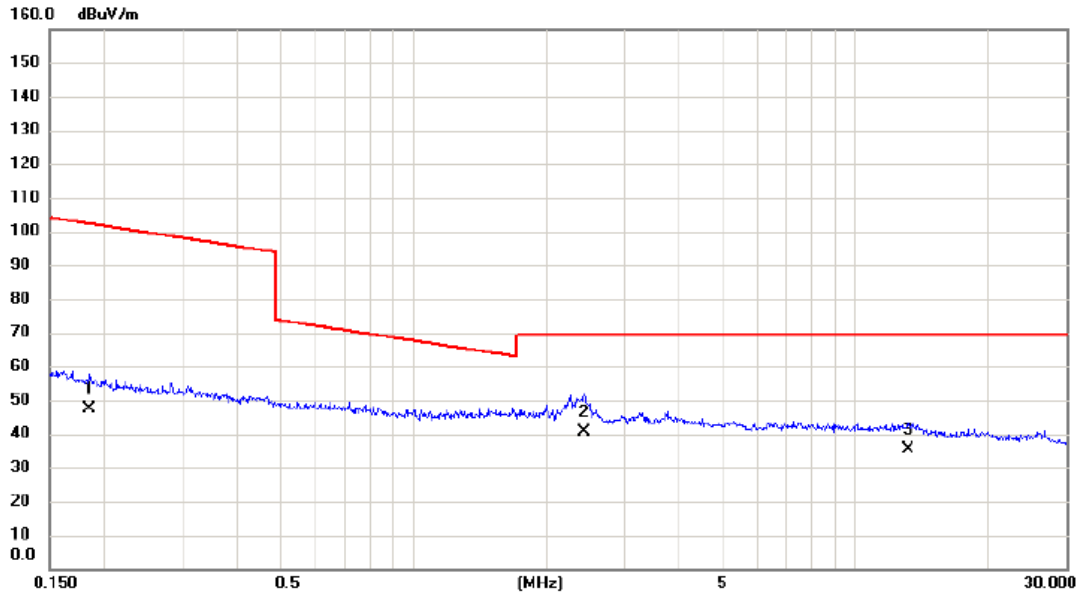


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.1853       | 28.66                    | 18.70                   | 47.36                      | 102.25          | -54.89       | AVG      |         |
| 2   | *   | 2.4346       | 23.31                    | 17.36                   | 40.67                      | 69.54           | -28.87       | QP       |         |
| 3   |     | 13.1965      | 19.53                    | 15.75                   | 35.28                      | 69.54           | -34.26       | QP       |         |



**ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: UNII-1/TX A Mode 5180MHz\_Adapter:Fu Hua


Vertical

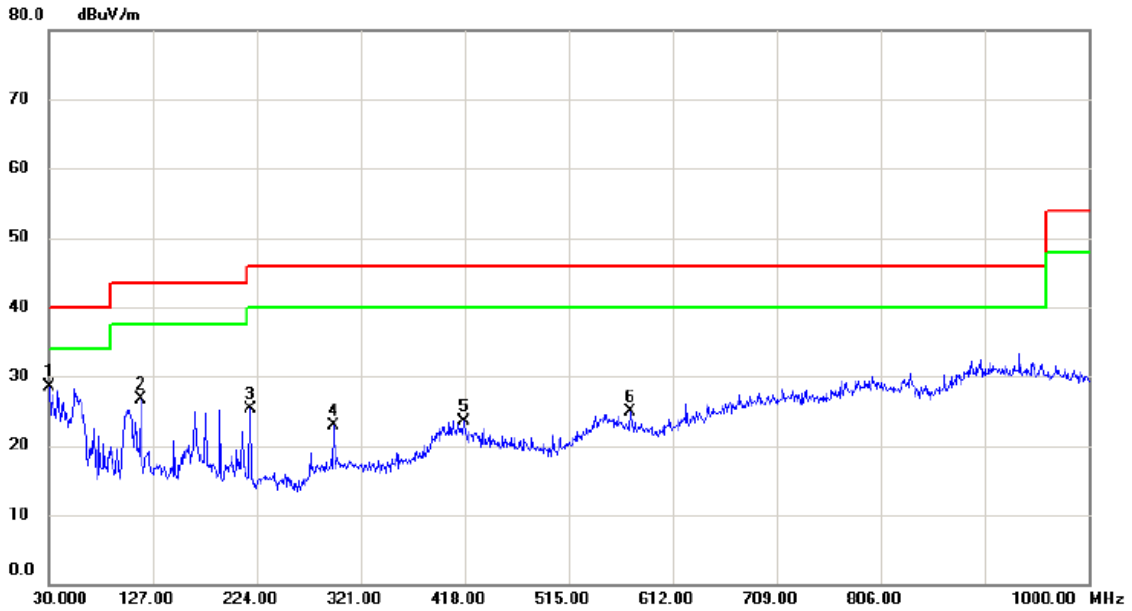

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 30.970       | 42.63                    | -14.12                  | 28.51                      | 40.00           | -11.49       | peak     |         |
| 2   |     | 115.360      | 40.66                    | -14.01                  | 26.65                      | 43.50           | -16.85       | peak     |         |
| 3   |     | 218.180      | 39.67                    | -14.32                  | 25.35                      | 46.00           | -20.65       | peak     |         |
| 4   |     | 295.780      | 33.47                    | -10.62                  | 22.85                      | 46.00           | -23.15       | peak     |         |
| 5   |     | 417.030      | 31.36                    | -7.86                   | 23.50                      | 46.00           | -22.50       | peak     |         |
| 6   |     | 572.230      | 30.47                    | -5.66                   | 24.81                      | 46.00           | -21.19       | peak     |         |


Test Mode: UNII-1/TX A Mode 5180MHz\_Adapter:Fu Hua

**Horizontal**

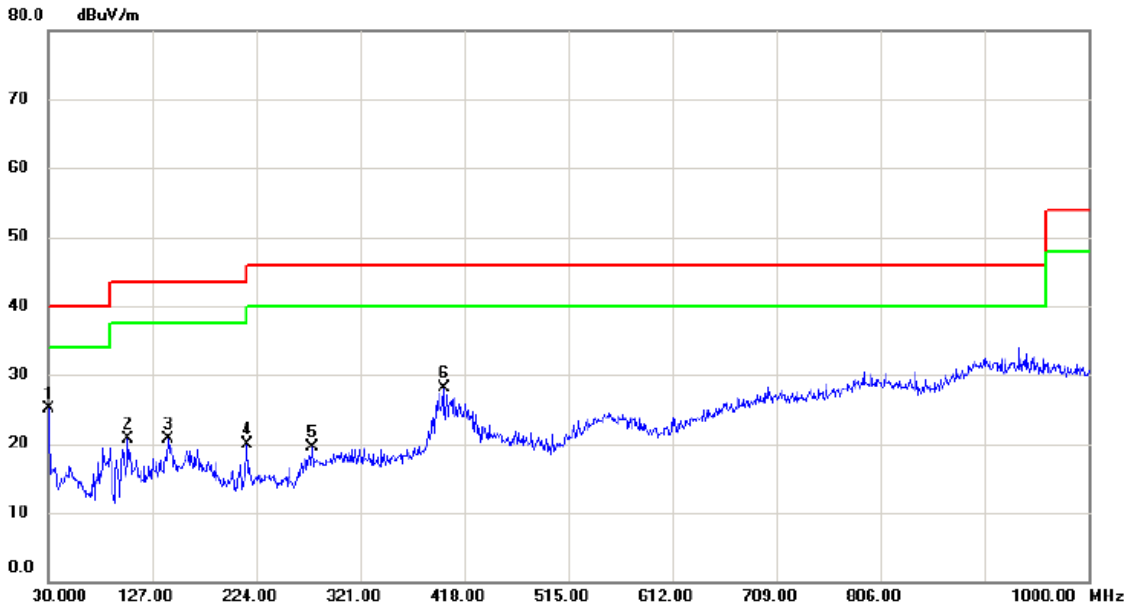

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 30.000       | 39.22                    | -14.03                  | 25.19                      | 40.00           | -14.81       | peak     |         |
| 2   |     | 104.690      | 35.73                    | -15.08                  | 20.65                      | 43.50           | -22.85       | peak     |         |
| 3   |     | 141.550      | 34.35                    | -13.62                  | 20.73                      | 43.50           | -22.77       | peak     |         |
| 4   |     | 215.270      | 34.44                    | -14.44                  | 20.00                      | 43.50           | -23.50       | peak     |         |
| 5   |     | 276.380      | 32.12                    | -12.54                  | 19.58                      | 46.00           | -26.42       | peak     |         |
| 6   |     | 398.600      | 35.90                    | -7.88                   | 28.02                      | 46.00           | -17.98       | peak     |         |


Test Mode: UNII-1/TX A Mode 5240MHz\_\_Adapter:Fu Hua

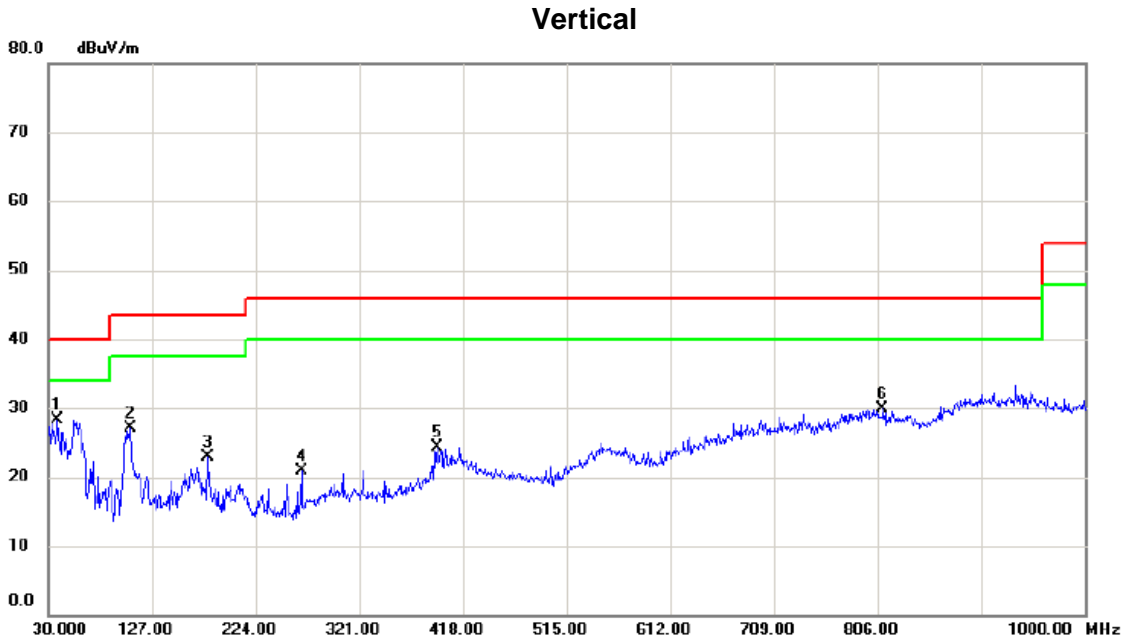

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 38.730       | 42.33                    | -14.06                  | 28.27                      | 40.00           | -11.73       | peak     |         |
| 2   |     | 106.630      | 41.98                    | -14.93                  | 27.05                      | 43.50           | -16.45       | peak     |         |
| 3   |     | 179.380      | 35.69                    | -12.80                  | 22.89                      | 43.50           | -20.61       | peak     |         |
| 4   |     | 266.680      | 34.52                    | -13.68                  | 20.84                      | 46.00           | -25.16       | peak     |         |
| 5   |     | 393.750      | 32.53                    | -8.21                   | 24.32                      | 46.00           | -21.68       | peak     |         |
| 6   |     | 810.850      | 29.97                    | -0.06                   | 29.91                      | 46.00           | -16.09       | peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz\_Adapter:Fu Hua


**Horizontal**

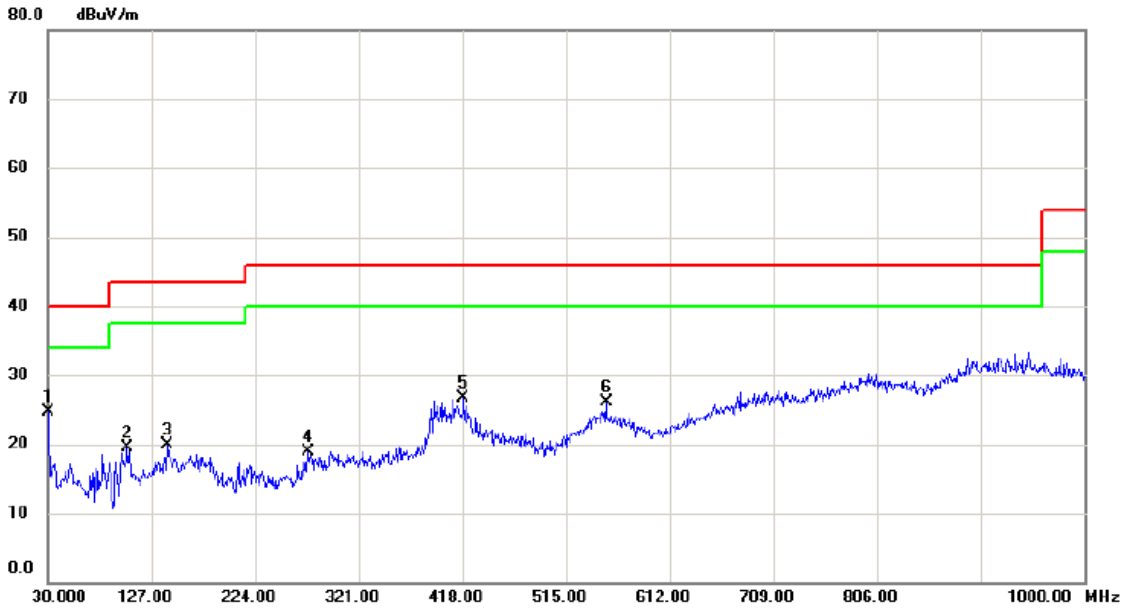

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 30.000       | 38.79                    | -14.03                  | 24.76                      | 40.00           | -15.24       | peak     |         |
| 2   |     | 104.690      | 34.54                    | -15.08                  | 19.46                      | 43.50           | -24.04       | peak     |         |
| 3   |     | 141.550      | 33.53                    | -13.62                  | 19.91                      | 43.50           | -23.59       | peak     |         |
| 4   |     | 273.470      | 31.88                    | -12.94                  | 18.94                      | 46.00           | -27.06       | peak     |         |
| 5   |     | 418.970      | 34.66                    | -7.87                   | 26.79                      | 46.00           | -19.21       | peak     |         |
| 6   |     | 552.830      | 30.72                    | -4.68                   | 26.04                      | 46.00           | -19.96       | peak     |         |


Test Mode: UNII-1/TX A Mode 5180MHz\_Adapter:Ou Lu Tong

**Vertical**

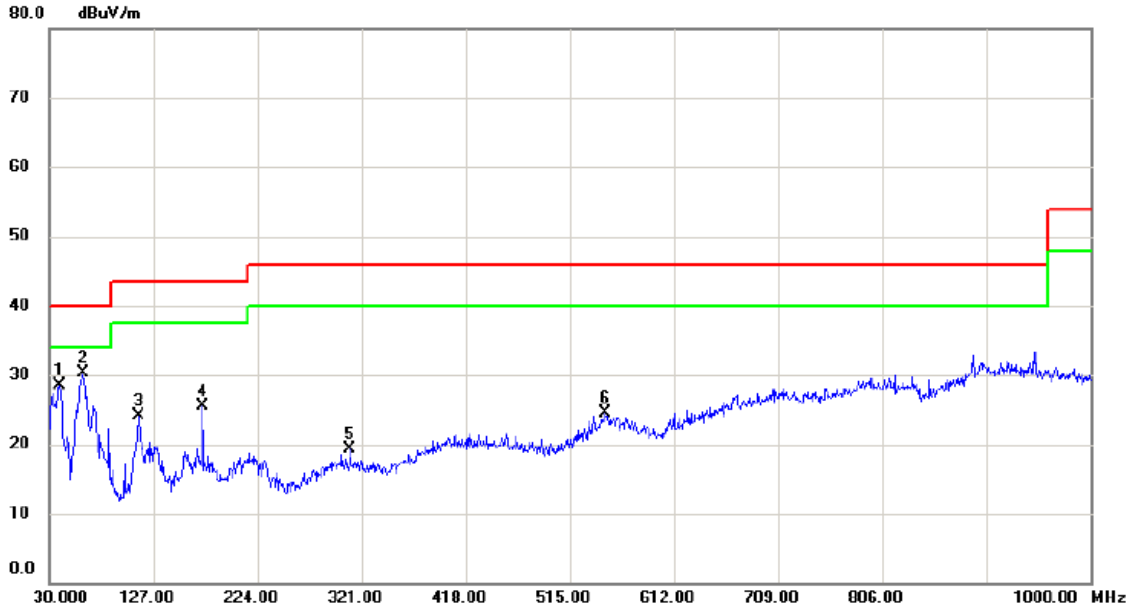


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 39.700       | 42.43                    | -13.95                  | 28.48                      | 40.00           | -11.52       | peak     |         |
| 2   | *   | 61.040       | 44.37                    | -14.02                  | 30.35                      | 40.00           | -9.65        | peak     |         |
| 3   |     | 113.420      | 38.45                    | -14.25                  | 24.20                      | 43.50           | -19.30       | peak     |         |
| 4   |     | 172.590      | 37.84                    | -12.40                  | 25.44                      | 43.50           | -18.06       | peak     |         |
| 5   |     | 310.330      | 29.74                    | -10.38                  | 19.36                      | 46.00           | -26.64       | peak     |         |
| 6   |     | 547.980      | 29.30                    | -4.75                   | 24.55                      | 46.00           | -21.45       | peak     |         |

Test Mode: UNII-1/TX A Mode 5180MHz\_Adapter:Ou Lu Tong

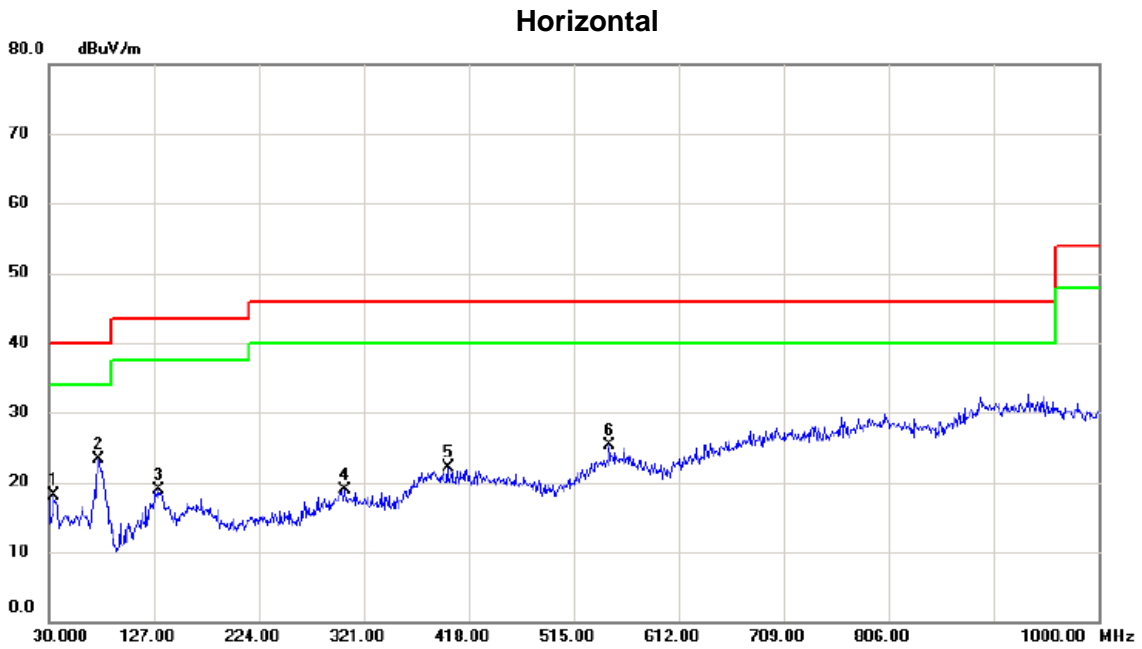

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 34.850       | 32.09                    | -13.94                  | 18.15                      | 40.00           | -21.85       | peak     |         |
| 2 *     | 75.590       | 39.82                    | -16.52                  | 23.30                      | 40.00           | -16.70       | peak     |         |
| 3       | 130.880      | 31.29                    | -12.48                  | 18.81                      | 43.50           | -24.69       | peak     |         |
| 4       | 303.540      | 29.17                    | -10.24                  | 18.93                      | 46.00           | -27.07       | peak     |         |
| 5       | 398.600      | 29.95                    | -7.88                   | 22.07                      | 46.00           | -23.93       | peak     |         |
| 6       | 547.980      | 30.11                    | -4.75                   | 25.36                      | 46.00           | -20.64       | peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz \_Adapter:Ou Lu Tong

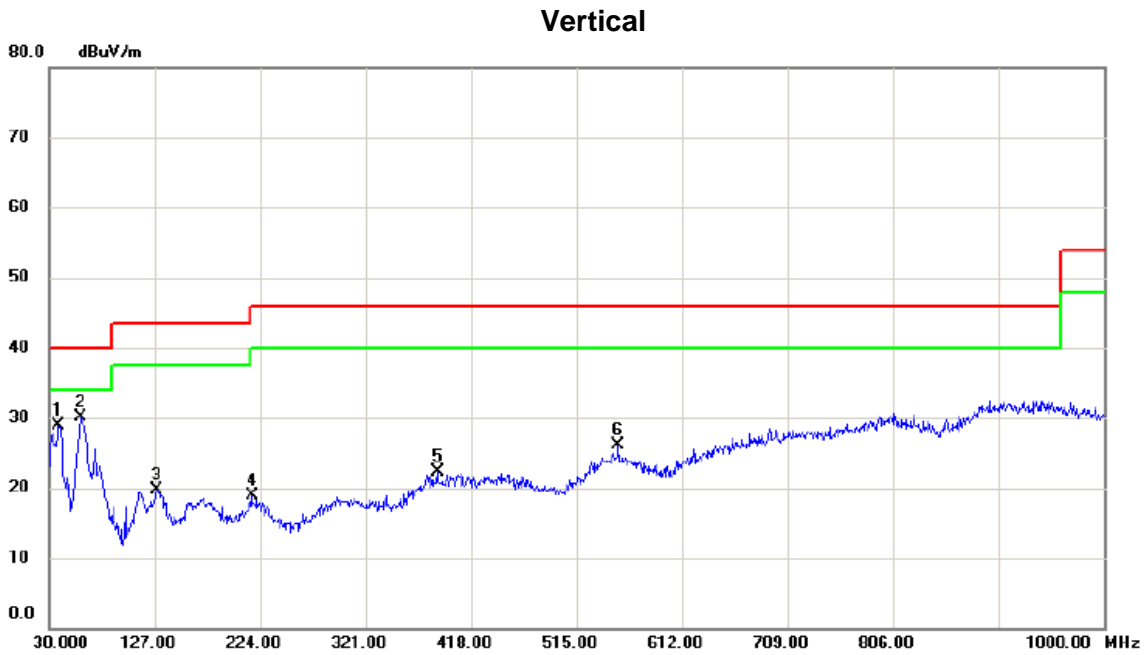


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 38.730       | 42.88                    | -14.06                  | 28.82                      | 40.00           | -11.18       | peak     |         |
| 2   | *   | 59.100       | 43.95                    | -13.78                  | 30.17                      | 40.00           | -9.83        | peak     |         |
| 3   |     | 128.940      | 32.22                    | -12.47                  | 19.75                      | 43.50           | -23.75       | peak     |         |
| 4   |     | 216.240      | 33.24                    | -14.40                  | 18.84                      | 46.00           | -27.16       | peak     |         |
| 5   |     | 386.960      | 30.97                    | -8.67                   | 22.30                      | 46.00           | -23.70       | peak     |         |
| 6   |     | 553.800      | 30.88                    | -4.73                   | 26.15                      | 46.00           | -19.85       | peak     |         |



Test Mode: UNII-1/TX A Mode 5240MHz\_Adapter:Ou Lu Tong

**Horizontal**

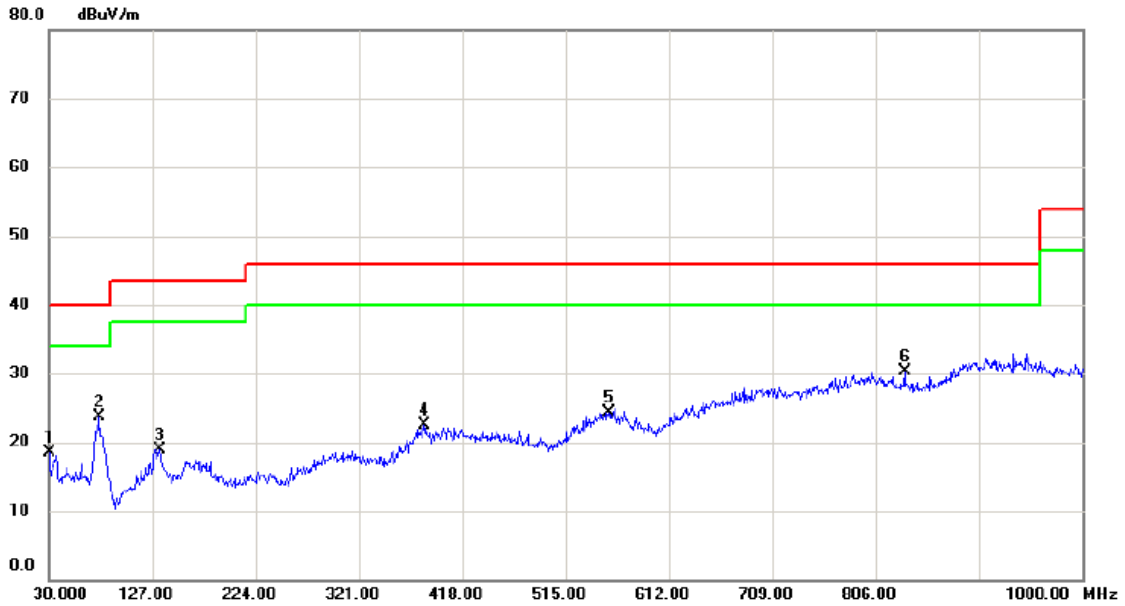


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 30.000       | 32.63                    | -14.03                  | 18.60                      | 40.00           | -21.40       | peak     |         |
| 2   |     | 77.530       | 39.94                    | -16.31                  | 23.63                      | 40.00           | -16.37       | peak     |         |
| 3   |     | 133.790      | 31.75                    | -12.88                  | 18.87                      | 43.50           | -24.63       | peak     |         |
| 4   |     | 382.110      | 31.42                    | -9.01                   | 22.41                      | 46.00           | -23.59       | peak     |         |
| 5   |     | 555.740      | 29.22                    | -4.83                   | 24.39                      | 46.00           | -21.61       | peak     |         |
| 6   | *   | 833.160      | 31.00                    | -0.74                   | 30.26                      | 46.00           | -15.74       | peak     |         |

**ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


### Vertical

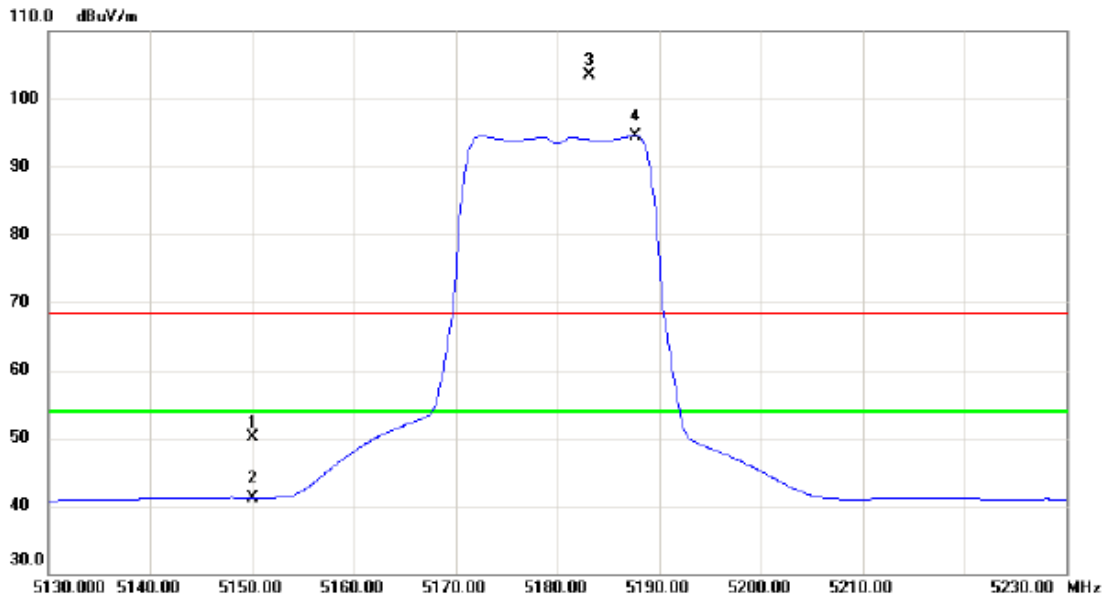

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |          |
| 1   |     | 5150.000 | 9.48          | 40.63          | 50.11       | 68.30  | -18.19 | peak     |          |
| 2   |     | 5150.000 | 0.41          | 40.63          | 41.04       | 54.00  | -12.96 | AVG      |          |
| 3   | X   | 5183.100 | 62.79         | 40.73          | 103.52      | 68.30  | 35.22  | peak     | No Limit |
| 4   | *   | 5187.700 | 53.79         | 40.75          | 94.54       | 54.00  | 40.54  | AVG      | No Limit |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


**Vertical**

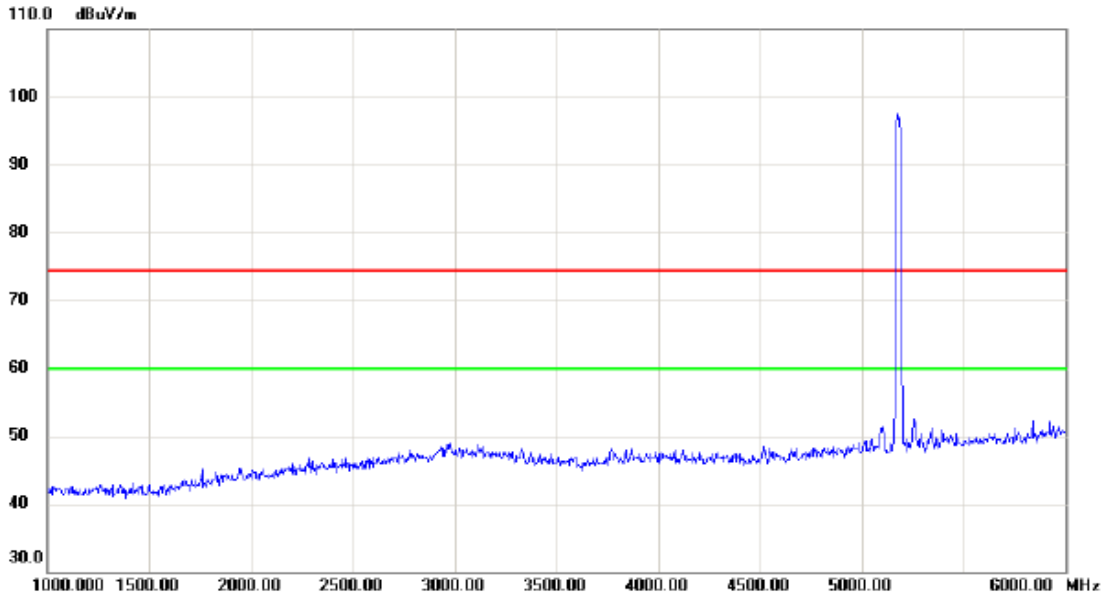

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 5180.00 | 95.0          | 0.0            | 95.0        | 74.0   | 21.0   |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


**Vertical**

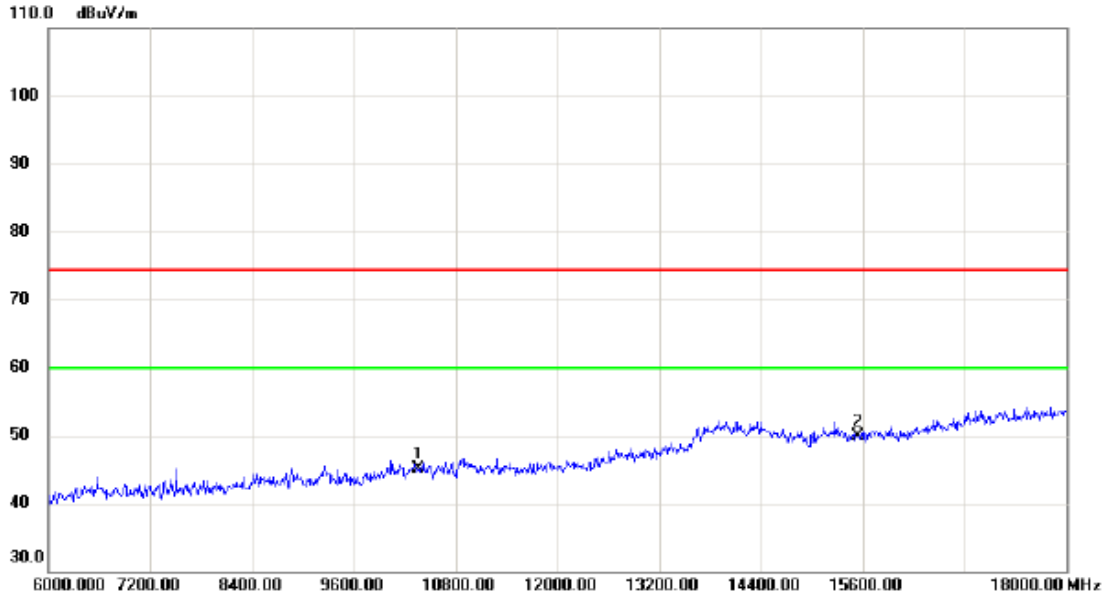

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10360.000    | 29.86                    | 15.23                   | 45.09                      | 74.30           | -29.21       | peak     |         |
| 2   | *   | 15540.000    | 31.02                    | 18.88                   | 49.90                      | 74.30           | -24.40       | peak     |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


**Vertical**

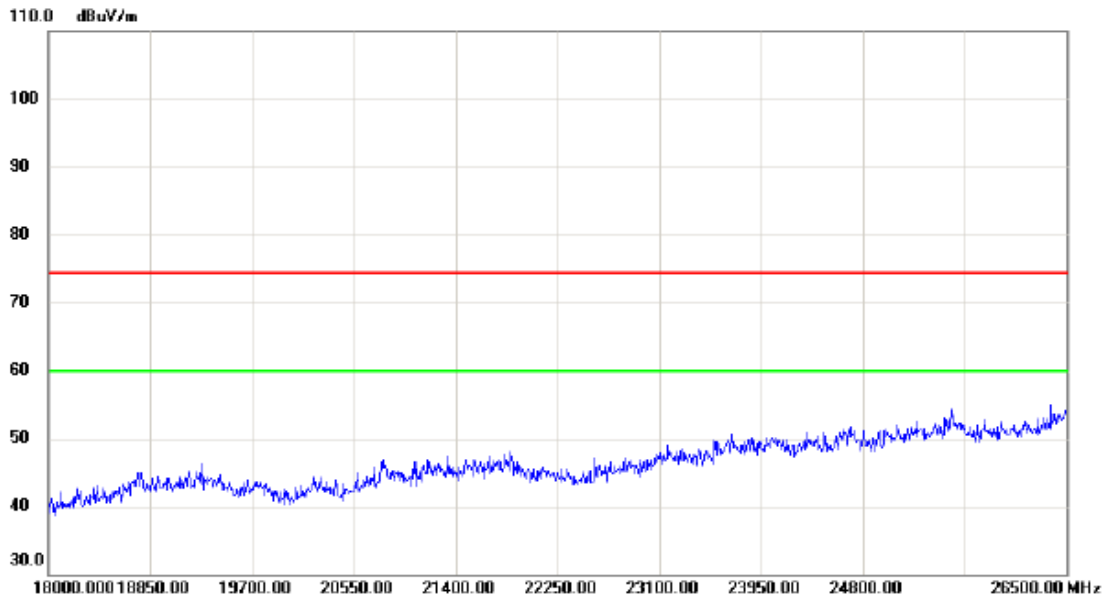

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


**Vertical**

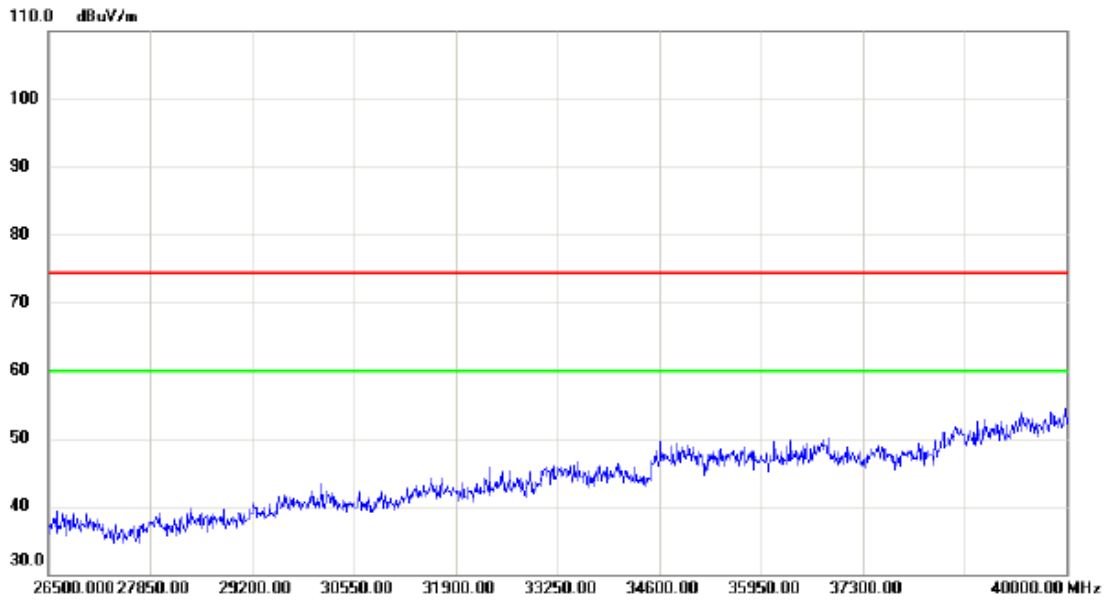

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |

### Horizontal

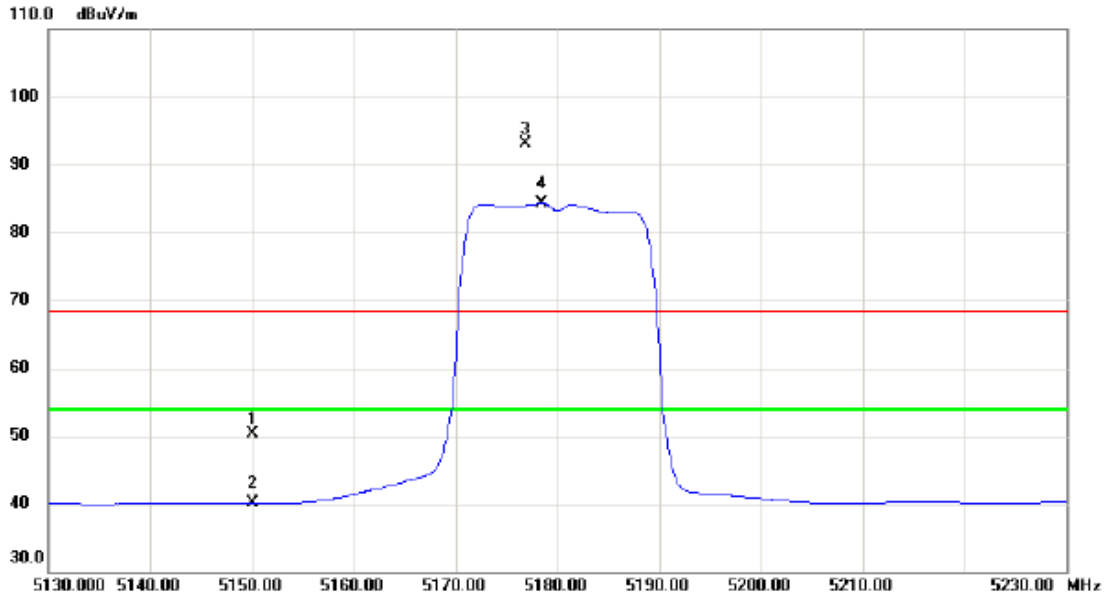


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |          |
| 1   |     | 5150.000 | 9.57          | 40.63          | 50.20       | 68.30  | -18.10 | peak     |          |
| 2   |     | 5150.000 | -0.59         | 40.63          | 40.04       | 54.00  | -13.96 | AVG      |          |
| 3   | X   | 5176.900 | 52.40         | 40.71          | 93.11       | 68.30  | 24.81  | peak     | No Limit |
| 4   | *   | 5178.500 | 43.52         | 40.72          | 84.24       | 54.00  | 30.24  | AVG      | No Limit |



|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


### Horizontal

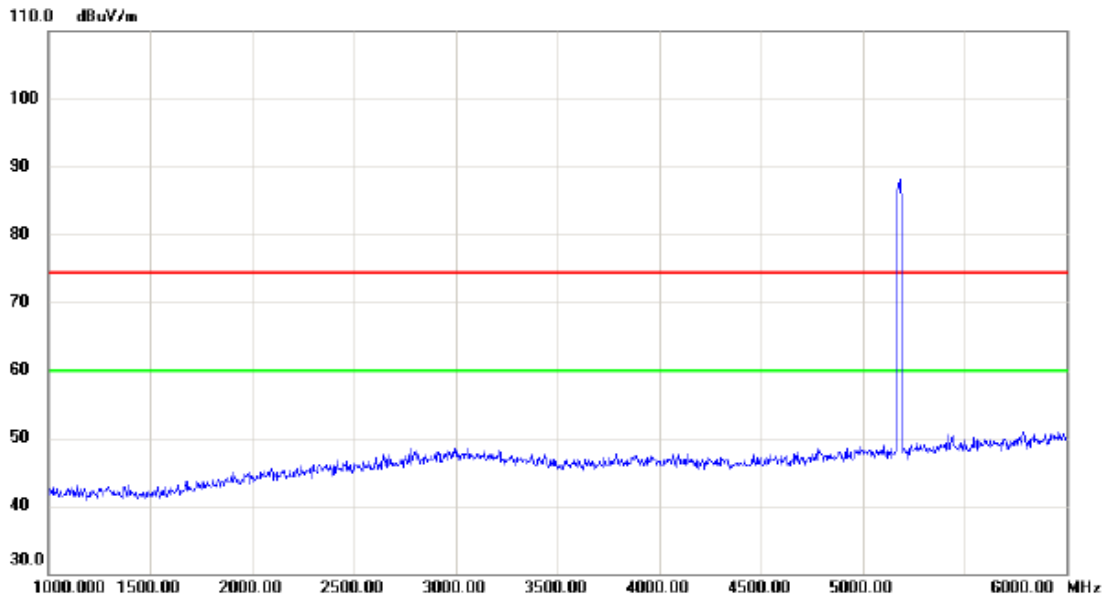

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


### Horizontal

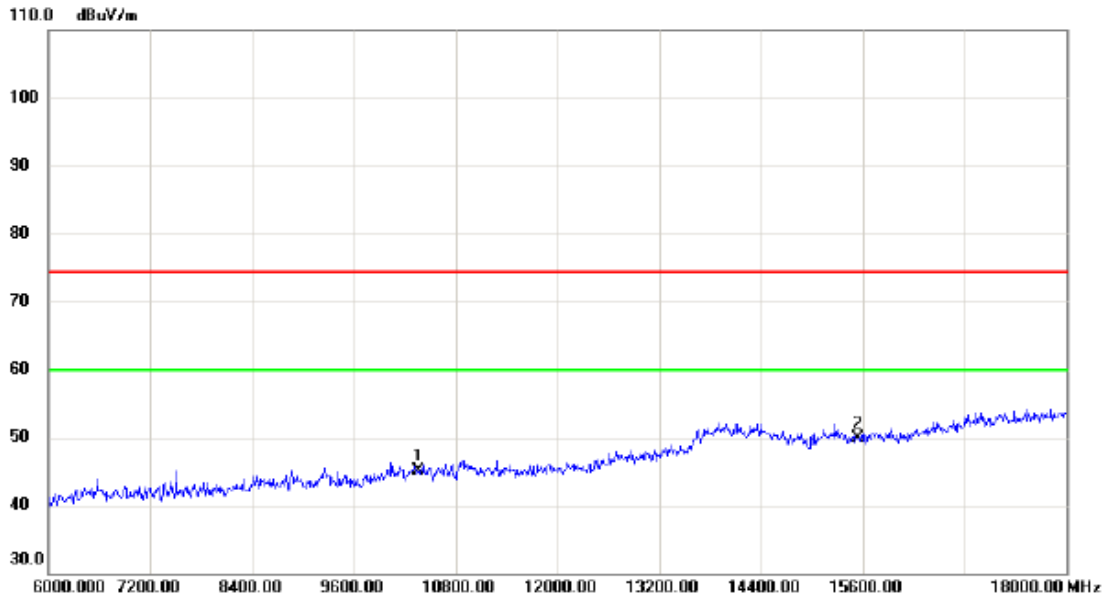

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10360.000    | 29.86                    | 15.23                   | 45.09                      | 74.30           | -29.21       | peak     |         |
| 2   | *   | 15540.000    | 31.02                    | 18.88                   | 49.90                      | 74.30           | -24.40       | peak     |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


### Horizontal

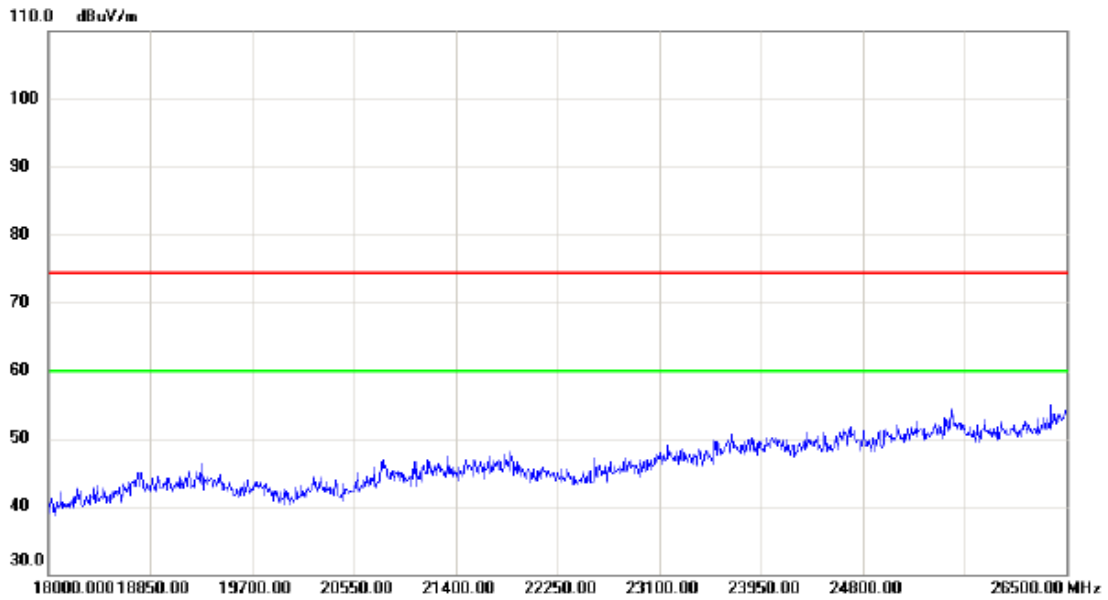

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz_ANT 0 |


**Horizontal**

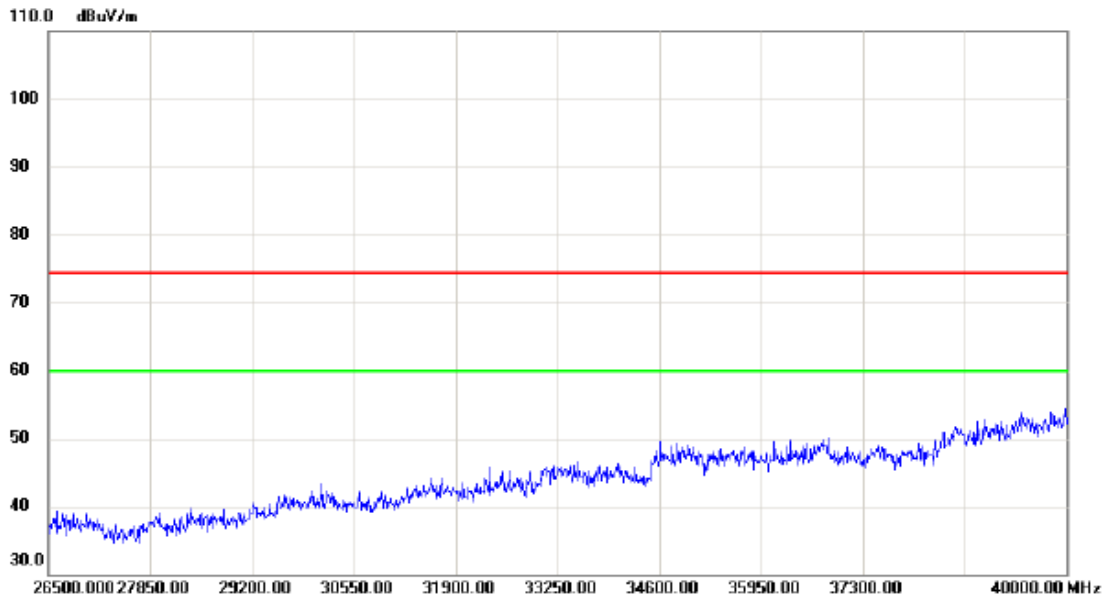

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


**Vertical**

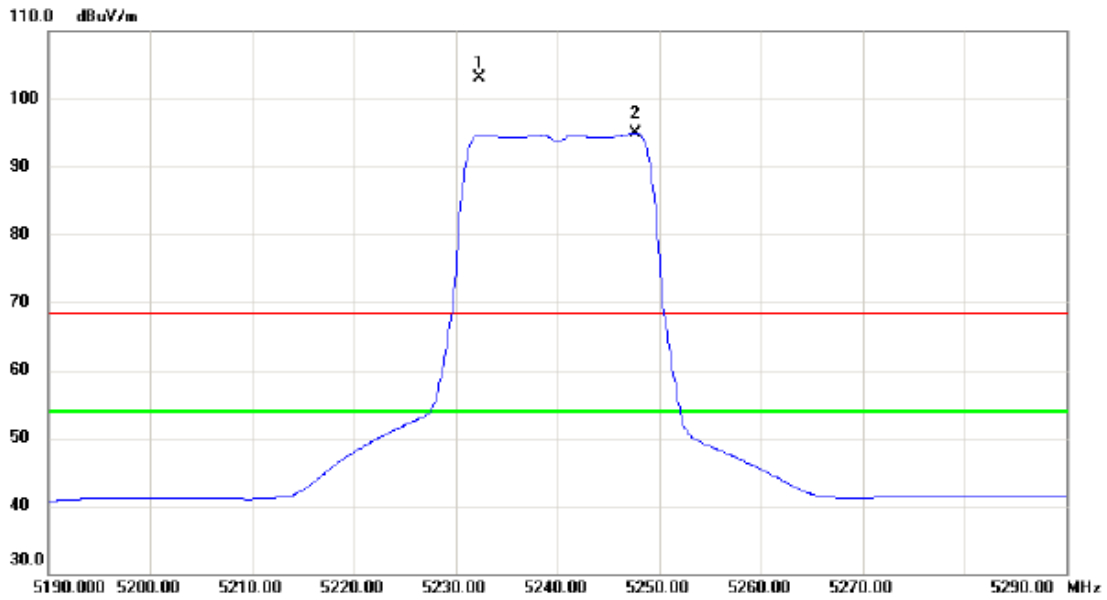

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5232.400     | 62.26                    | 40.90                   | 103.16                     | 68.30           | 34.86        | peak     | No Limit |
| 2   | *   | 5247.700     | 53.99                    | 40.94                   | 94.93                      | 54.00           | 40.93        | AVG      | No Limit |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


**Vertical**

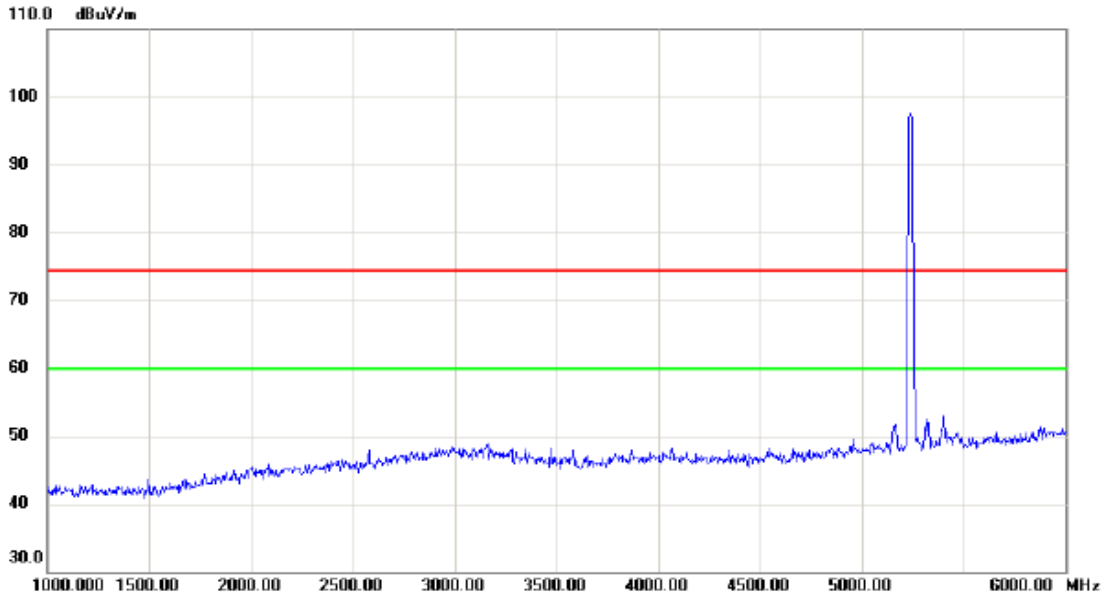

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


**Vertical**

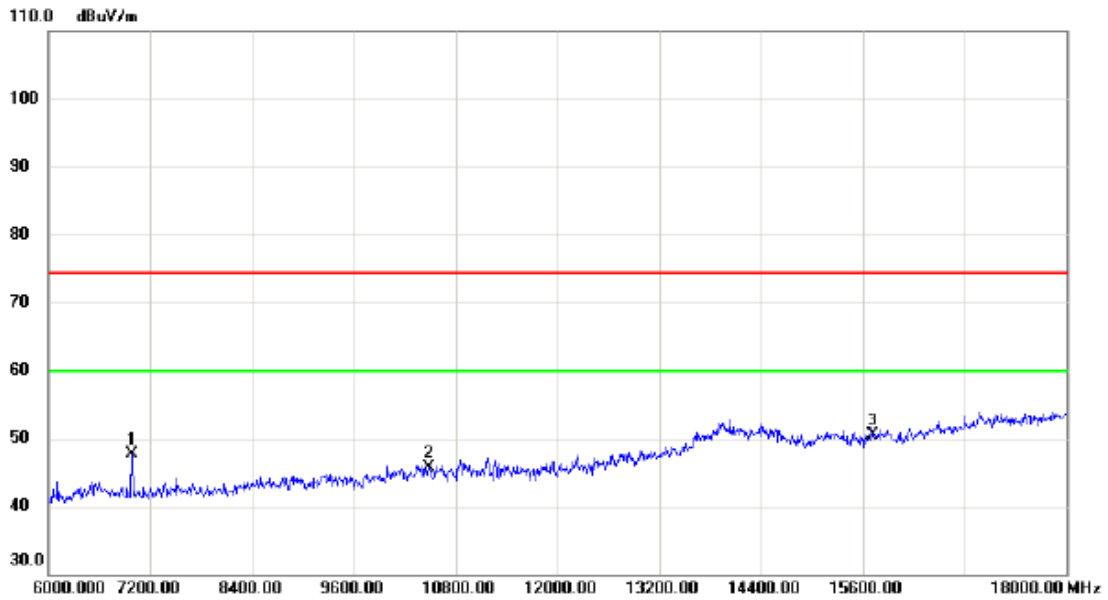

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6984.000     | 36.99                    | 10.65                   | 47.64                      | 74.30           | -26.66       | peak     |         |
| 2   |     | 10480.000    | 30.19                    | 15.54                   | 45.73                      | 74.30           | -28.57       | peak     |         |
| 3   | *   | 15720.000    | 31.62                    | 18.87                   | 50.49                      | 74.30           | -23.81       | peak     |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |

**Vertical**

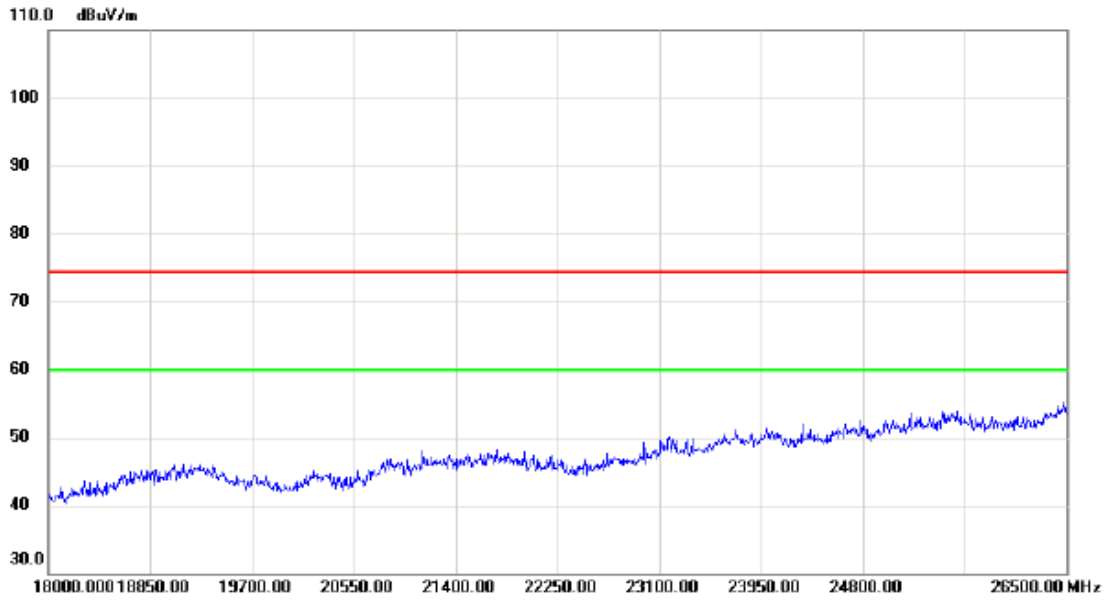


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |



|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


**Vertical**

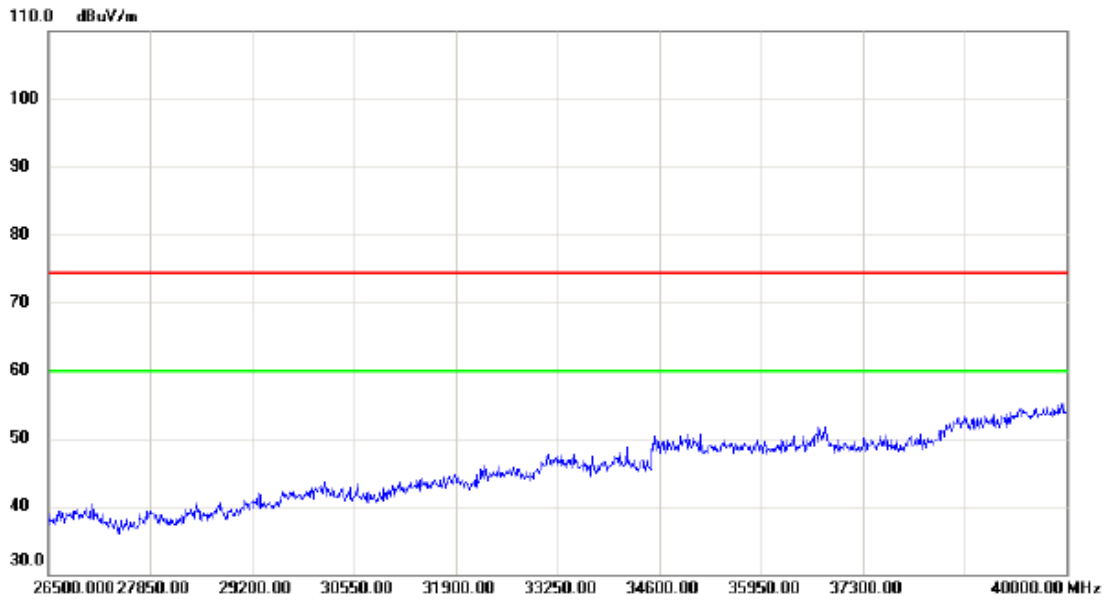

| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 26500.000 | 38            |                | 38          | 75     | 37     |          |         |
|     |     | 27850.00  | 38            |                | 38          | 75     | 37     |          |         |
|     |     | 29200.00  | 40            |                | 40          | 75     | 35     |          |         |
|     |     | 30550.00  | 42            |                | 42          | 75     | 33     |          |         |
|     |     | 31900.00  | 44            |                | 44          | 75     | 31     |          |         |
|     |     | 33250.00  | 46            |                | 46          | 75     | 29     |          |         |
|     |     | 34600.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 35950.00  | 49            |                | 49          | 75     | 26     |          |         |
|     |     | 37300.00  | 50            |                | 50          | 75     | 25     |          |         |
|     |     | 40000.00  | 55            |                | 55          | 75     | 20     |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


### Horizontal

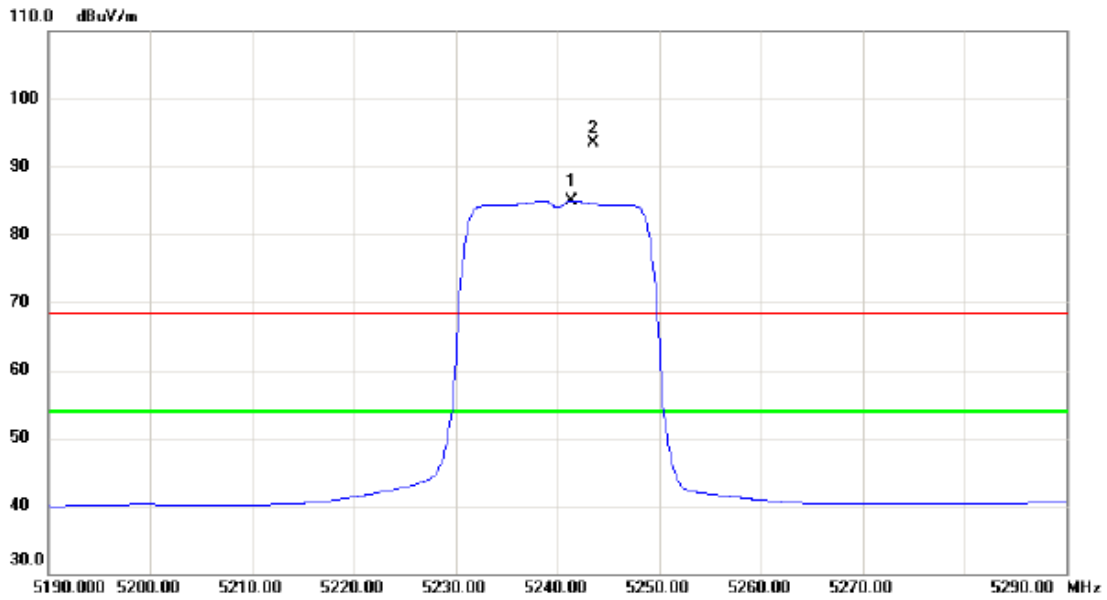

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |          |
| 1   | *   | 5241.400 | 44.01         | 40.93          | 84.94       | 54.00  | 30.94  | AVG      | No Limit |
| 2   | X   | 5243.500 | 52.48         | 40.93          | 93.41       | 68.30  | 25.11  | peak     | No Limit |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


### Horizontal

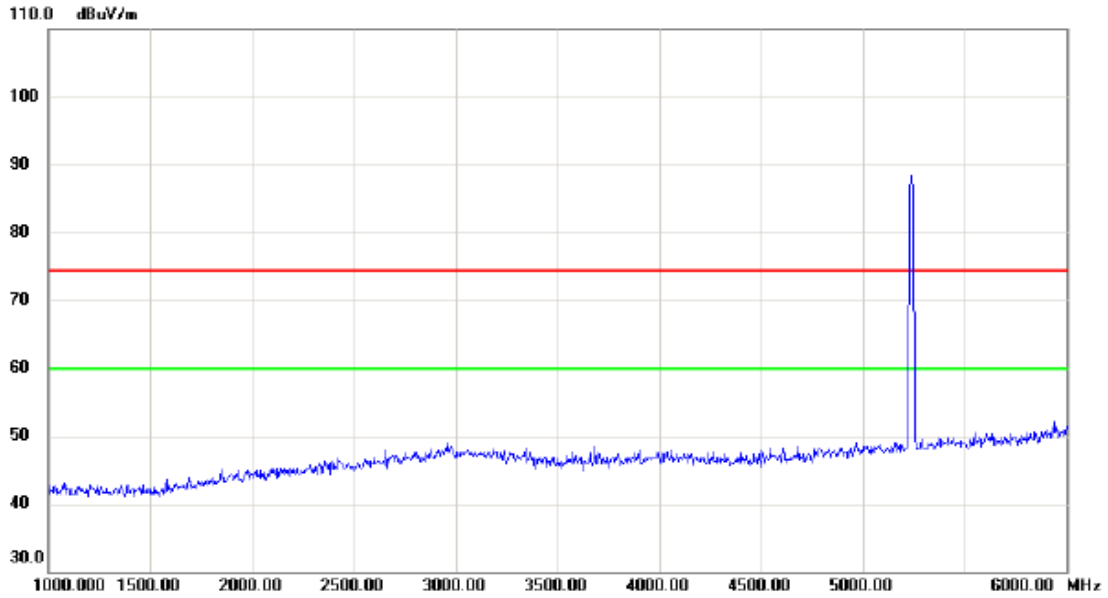

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 5240.00 | 88.0          | 0.0            | 88.0        | 74.0   | 14.0   |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


### Horizontal

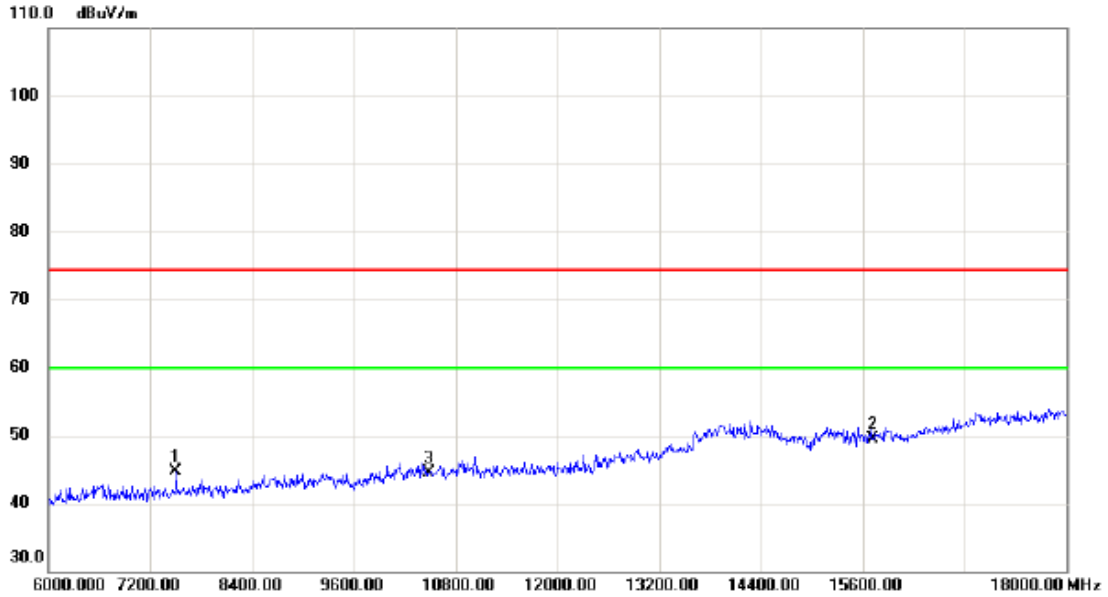

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7500.000     | 32.94                    | 11.76                   | 44.70                      | 74.30           | -29.60       | peak     |         |
| 2   | *   | 15720.000    | 30.60                    | 18.87                   | 49.47                      | 74.30           | -24.83       | peak     |         |
| 3   |     | 10480.000    | 28.90                    | 15.54                   | 44.44                      | 74.30           | -29.86       | peak     |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


### Horizontal

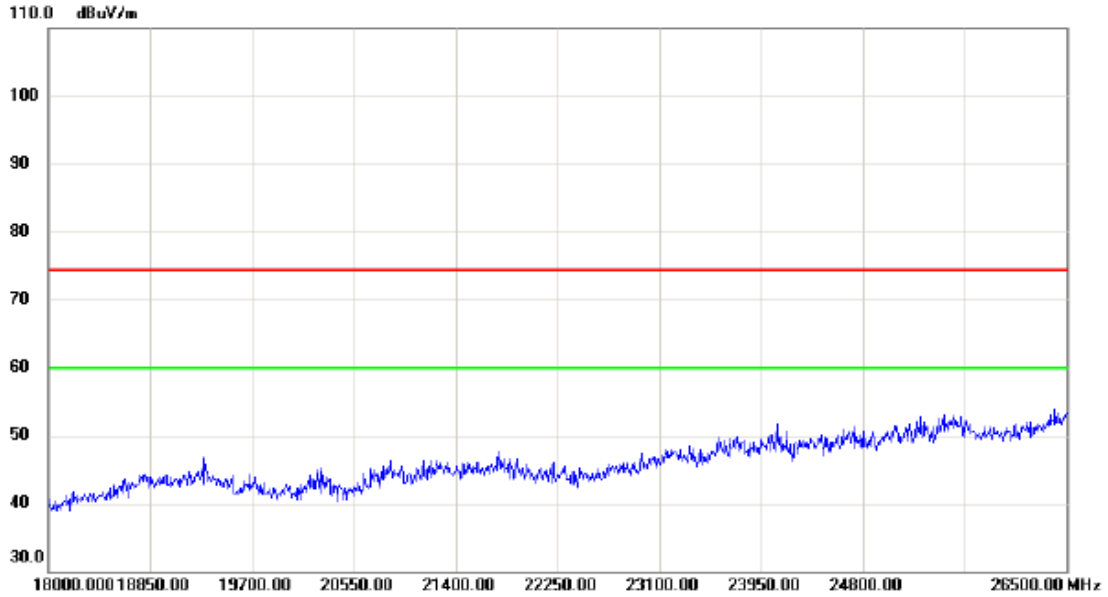

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz_ANT 0 |


### Horizontal

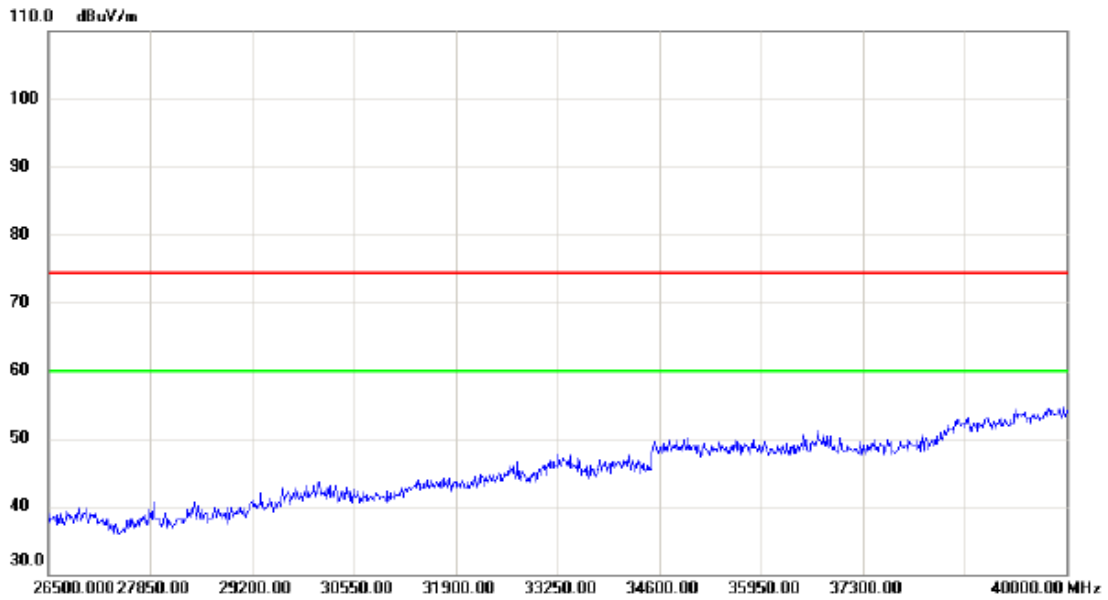

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


**Vertical**

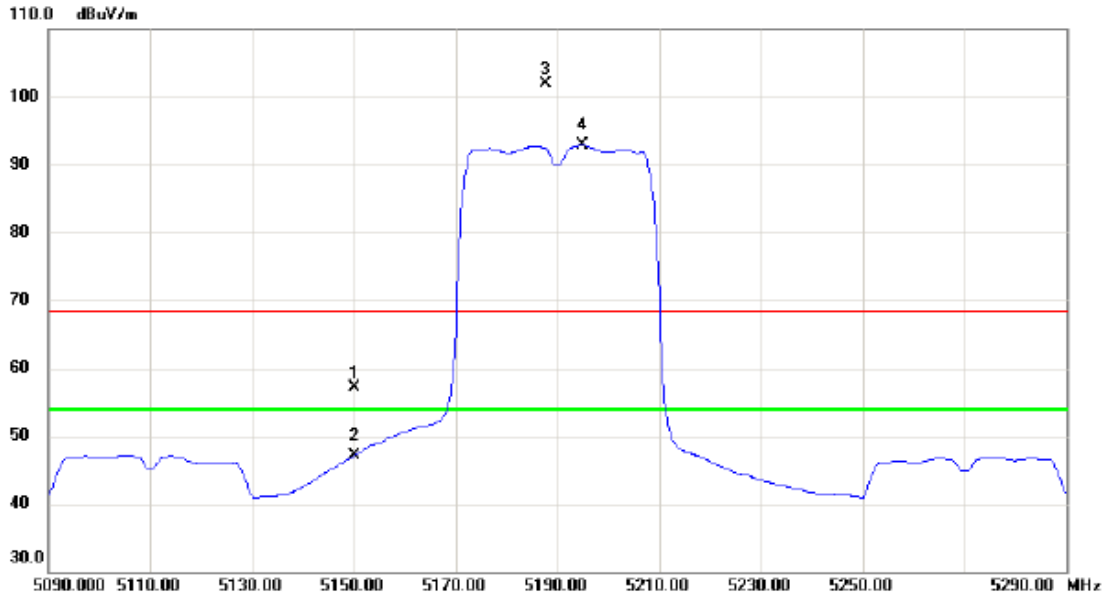

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5150.000     | 16.53                    | 40.63                   | 57.16                      | 68.30           | -11.14       | peak     |          |
| 2   |     | 5150.000     | 6.39                     | 40.63                   | 47.02                      | 54.00           | -6.98        | AVG      |          |
| 3   | X   | 5187.600     | 61.20                    | 40.75                   | 101.95                     | 68.30           | 33.65        | peak     | No Limit |
| 4   | *   | 5194.800     | 52.05                    | 40.78                   | 92.83                      | 54.00           | 38.83        | AVG      | No Limit |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |

**Vertical**

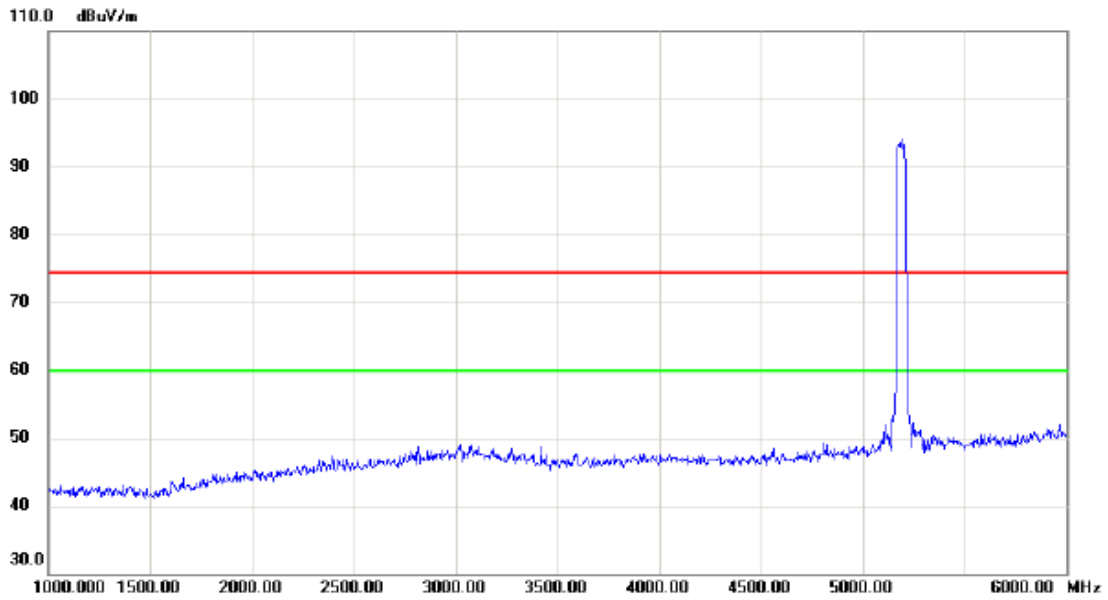


| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 5190.00 | 95.0          | 0.0            | 95.0        | 75.0   | 20.0   |          |         |



|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


**Vertical**

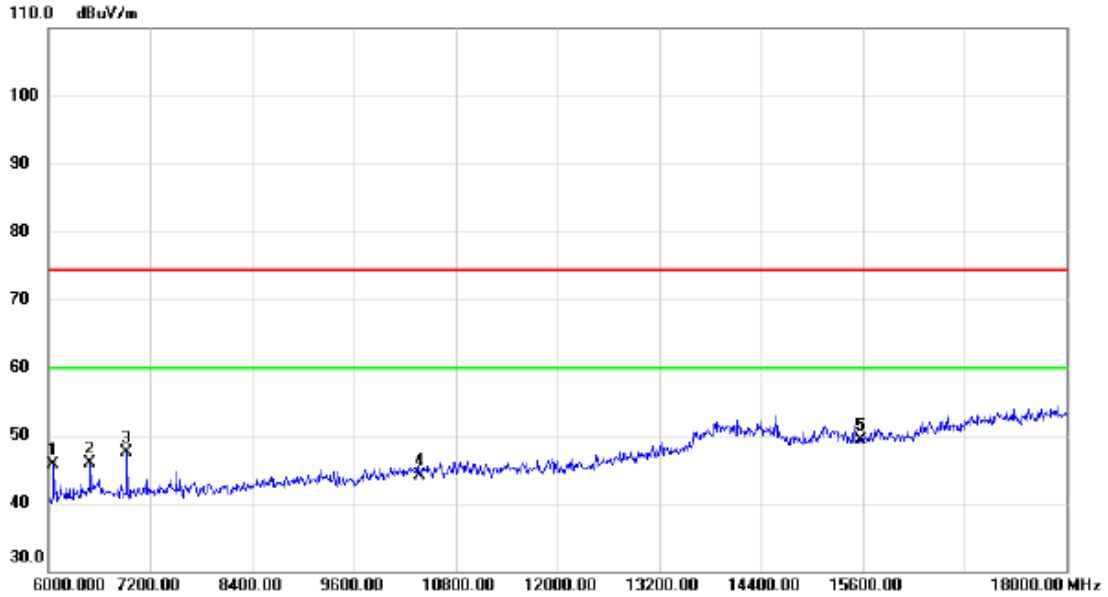

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6060.000     | 36.34                    | 9.27                    | 45.61                      | 74.30           | -28.69       | peak     |         |
| 2   |     | 6492.000     | 34.96                    | 10.86                   | 45.82                      | 74.30           | -28.48       | peak     |         |
| 3   |     | 6924.000     | 36.90                    | 10.69                   | 47.59                      | 74.30           | -26.71       | peak     |         |
| 4   |     | 10380.000    | 28.86                    | 15.29                   | 44.15                      | 74.30           | -30.15       | peak     |         |
| 5   | *   | 15570.000    | 30.34                    | 18.87                   | 49.21                      | 74.30           | -25.09       | peak     |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


**Vertical**

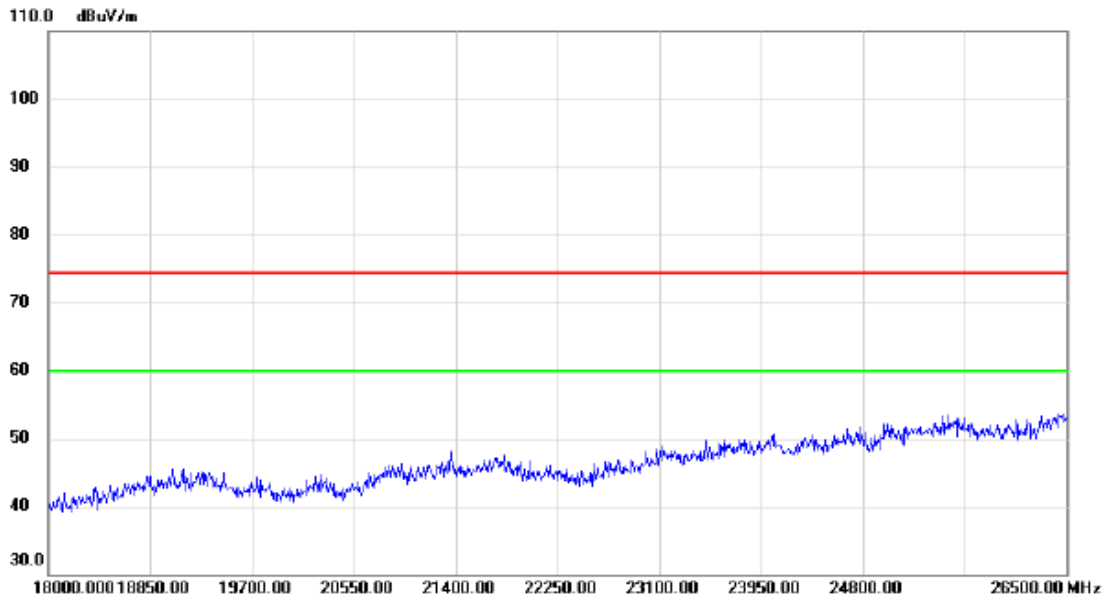

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


**Vertical**

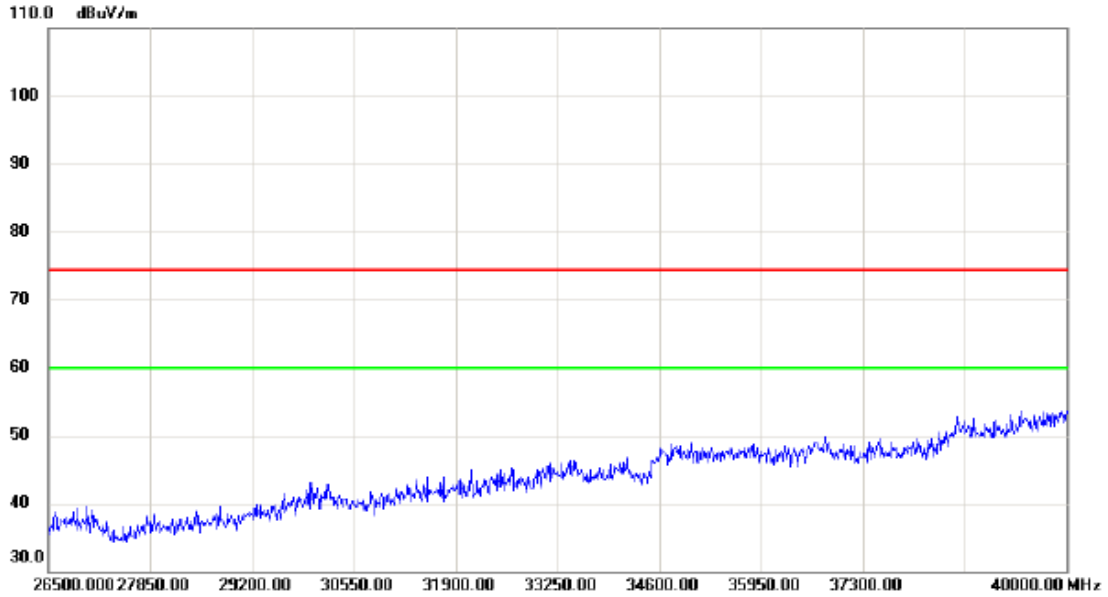

| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 26500.000 | 35            |                | 35          | 75     | 40     |          |         |
|     |     | 27850.00  | 35            |                | 35          | 75     | 40     |          |         |
|     |     | 29200.00  | 38            |                | 38          | 75     | 37     |          |         |
|     |     | 30550.00  | 40            |                | 40          | 75     | 35     |          |         |
|     |     | 31900.00  | 42            |                | 42          | 75     | 33     |          |         |
|     |     | 33250.00  | 45            |                | 45          | 75     | 30     |          |         |
|     |     | 34600.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 35950.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 37300.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 40000.00  | 55            |                | 55          | 75     | 20     |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


### Horizontal

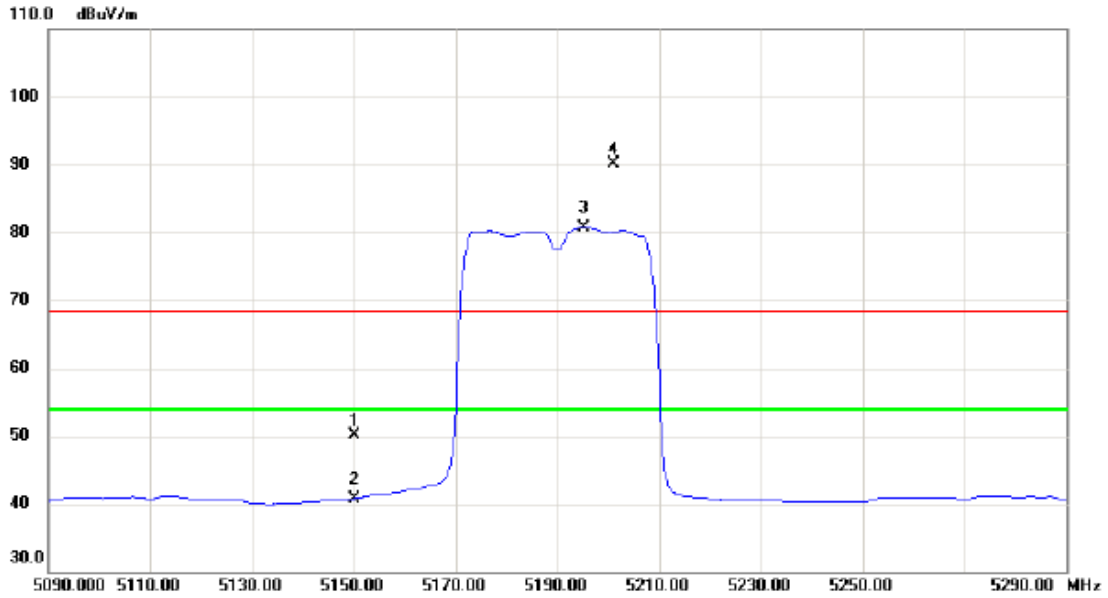

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5150.000     | 9.53                     | 40.63                   | 50.16                      | 68.30           | -18.14       | peak     |          |
| 2   |     | 5150.000     | 0.14                     | 40.63                   | 40.77                      | 54.00           | -13.23       | AVG      |          |
| 3   | *   | 5195.200     | 39.99                    | 40.78                   | 80.77                      | 54.00           | 26.77        | AVG      | No Limit |
| 4   | X   | 5201.000     | 49.36                    | 40.79                   | 90.15                      | 68.30           | 21.85        | peak     | No Limit |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


### Horizontal

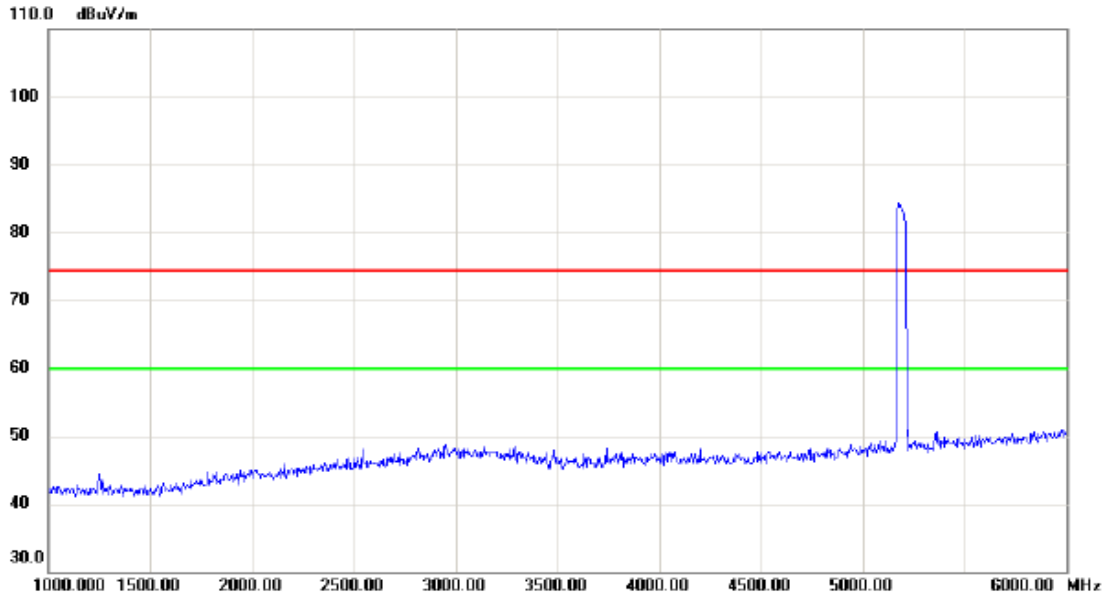

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


### Horizontal

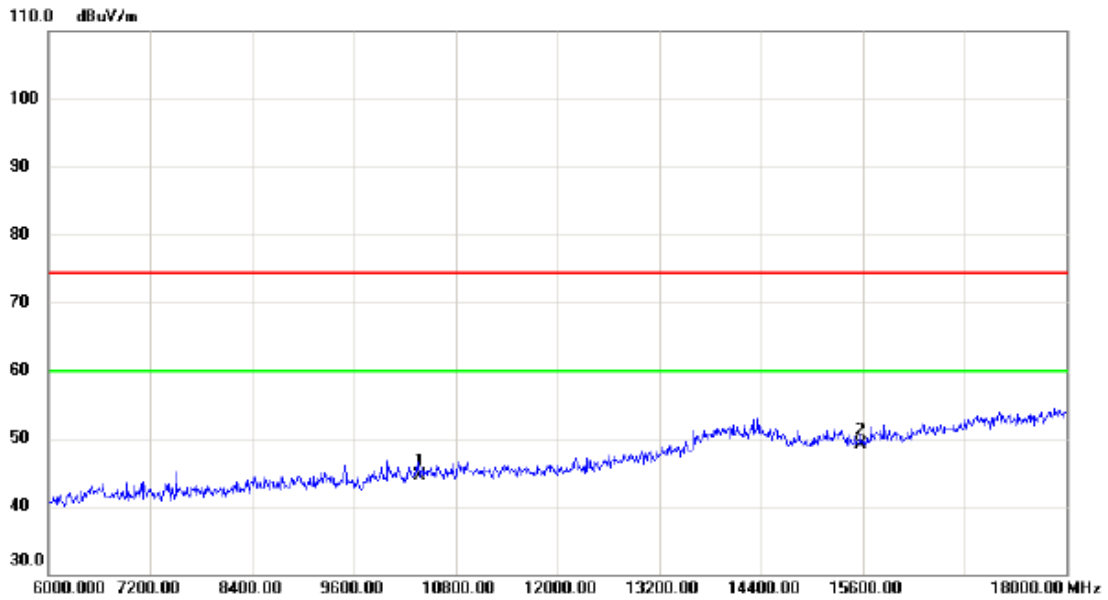

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10380.000    | 29.28                    | 15.29                   | 44.57                      | 74.30           | -29.73       | peak     |         |
| 2   | *   | 15570.000    | 30.32                    | 18.87                   | 49.19                      | 74.30           | -25.11       | peak     |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |


### Horizontal

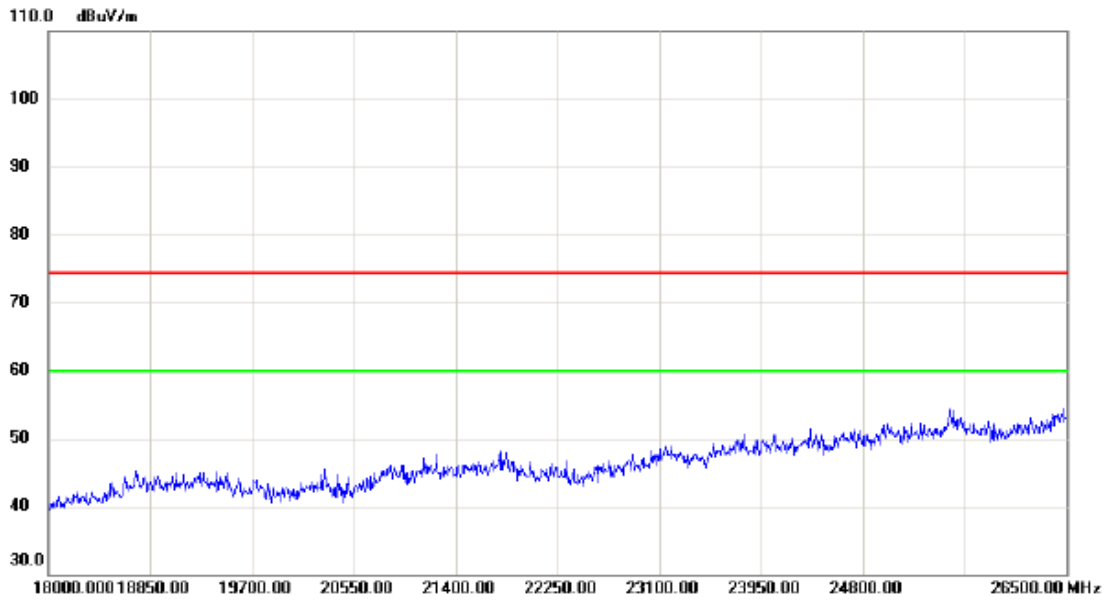

| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 18000.000 | 40            |                | 40          |        |        |          |         |
|     |     | 18850.00  | 42            |                | 42          |        |        |          |         |
|     |     | 19700.00  | 43            |                | 43          |        |        |          |         |
|     |     | 20550.00  | 44            |                | 44          |        |        |          |         |
|     |     | 21400.00  | 45            |                | 45          |        |        |          |         |
|     |     | 22250.00  | 46            |                | 46          |        |        |          |         |
|     |     | 23100.00  | 47            |                | 47          |        |        |          |         |
|     |     | 23950.00  | 48            |                | 48          |        |        |          |         |
|     |     | 24800.00  | 49            |                | 49          |        |        |          |         |
|     |     | 25650.00  | 50            |                | 50          |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz_ANT 0 |

### Horizontal

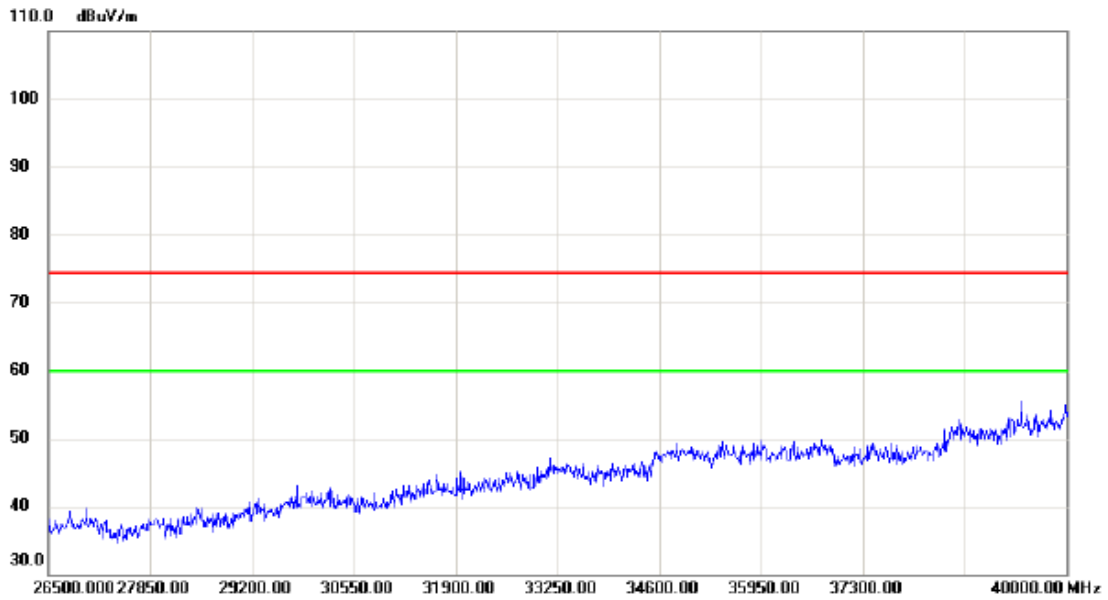


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |



|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


### Vertical

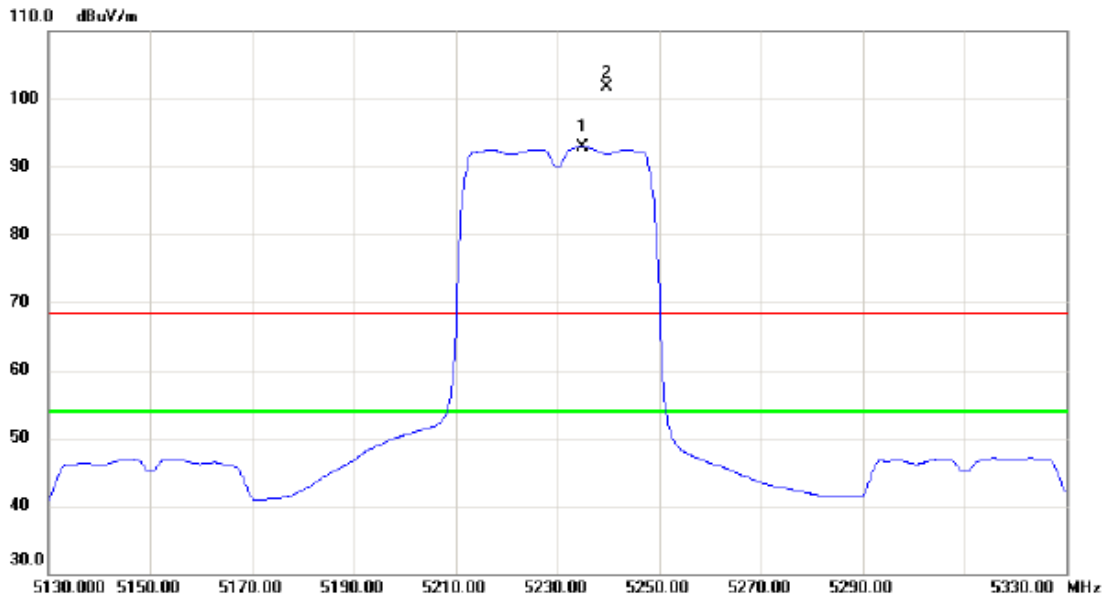

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5234.800     | 52.04                    | 40.90                   | 92.94                      | 54.00           | 38.94        | AVG      | No Limit |
| 2   | X   | 5239.600     | 60.76                    | 40.93                   | 101.69                     | 68.30           | 33.39        | peak     | No Limit |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


**Vertical**

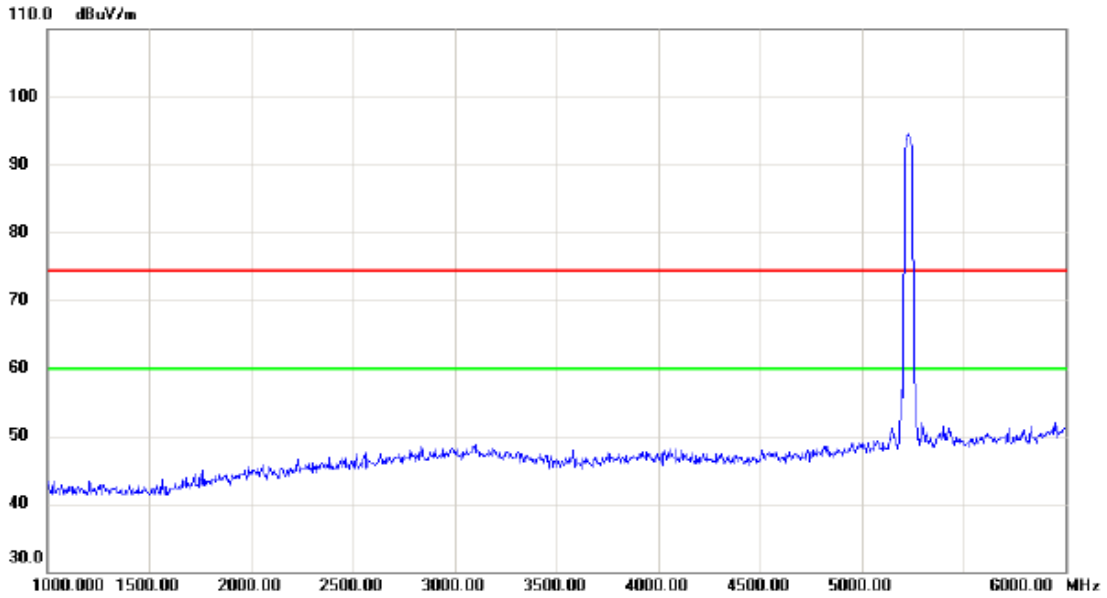

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 5230  | 95            |                | 95          | 75     | 20     |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


**Vertical**

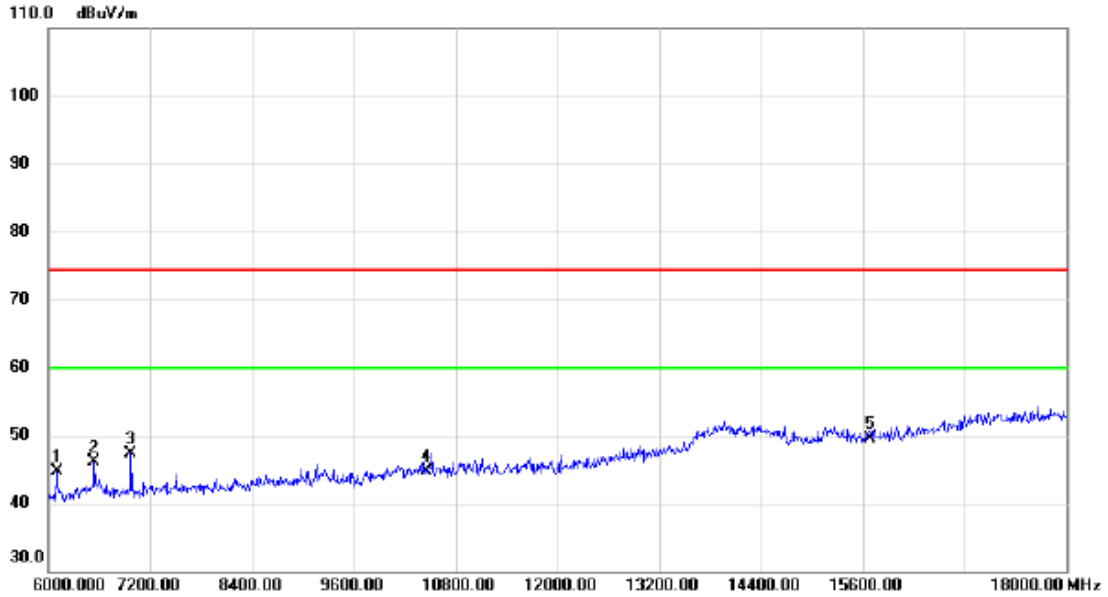

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6096.000     | 35.36                    | 9.41                    | 44.77                      | 74.30           | -29.53       | peak     |         |
| 2   |     | 6540.000     | 35.21                    | 10.87                   | 46.08                      | 74.30           | -28.22       | peak     |         |
| 3   |     | 6972.000     | 36.68                    | 10.66                   | 47.34                      | 74.30           | -26.96       | peak     |         |
| 4   |     | 10460.000    | 29.17                    | 15.49                   | 44.66                      | 74.30           | -29.64       | peak     |         |
| 5   | *   | 15690.000    | 30.63                    | 18.88                   | 49.51                      | 74.30           | -24.79       | peak     |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


**Vertical**

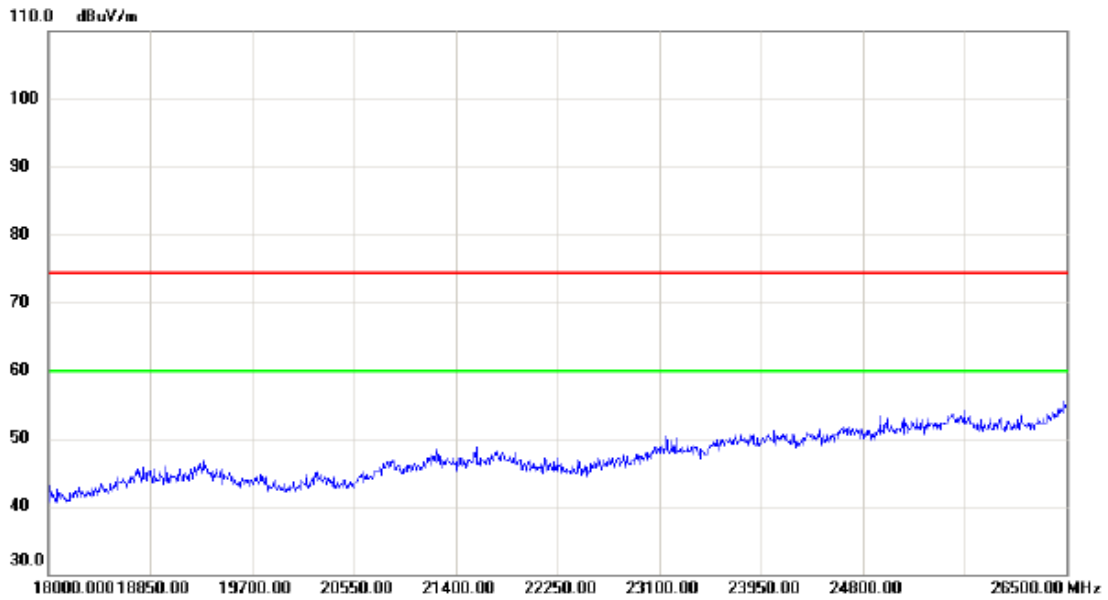

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


**Vertical**

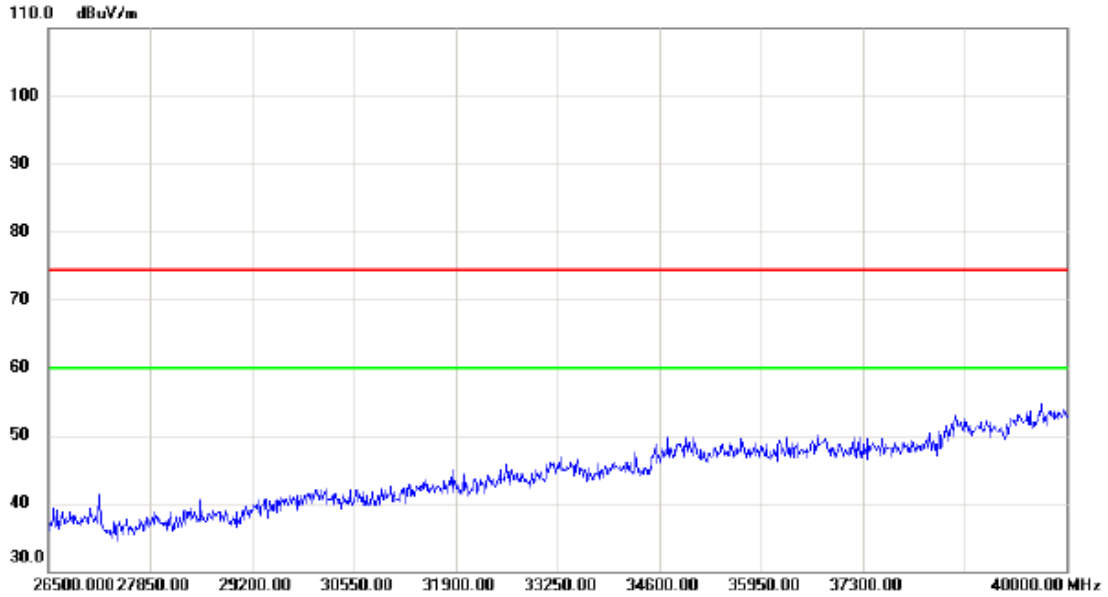

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


### Horizontal

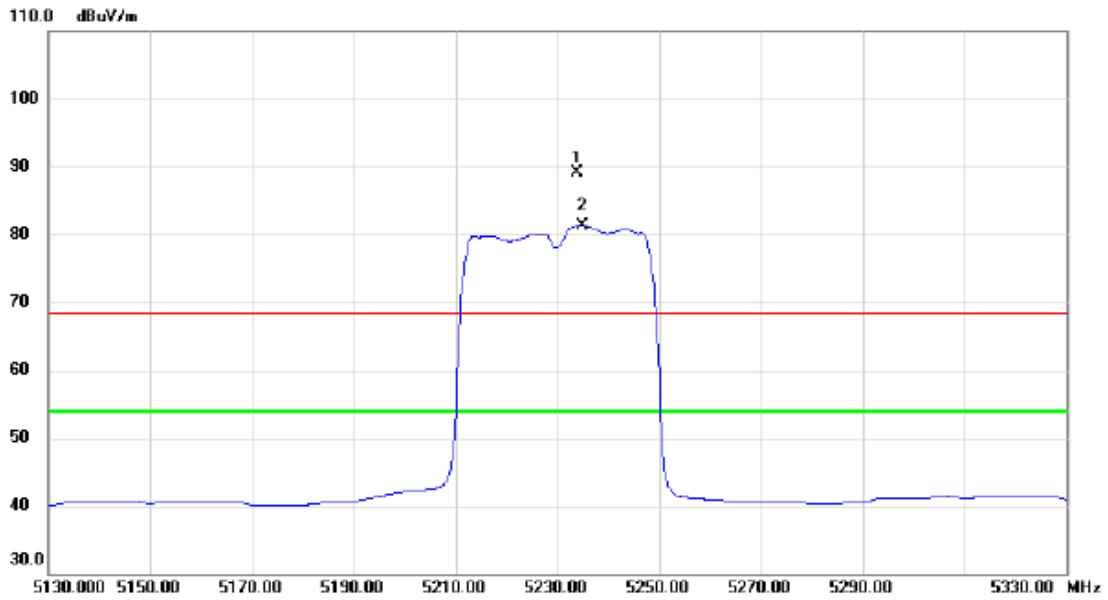

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5233.800     | 48.20                    | 40.90                   | 89.10                      | 68.30           | 20.80        | peak     | No Limit |
| 2   | *   | 5234.800     | 40.41                    | 40.90                   | 81.31                      | 54.00           | 27.31        | AVG      | No Limit |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


### Horizontal

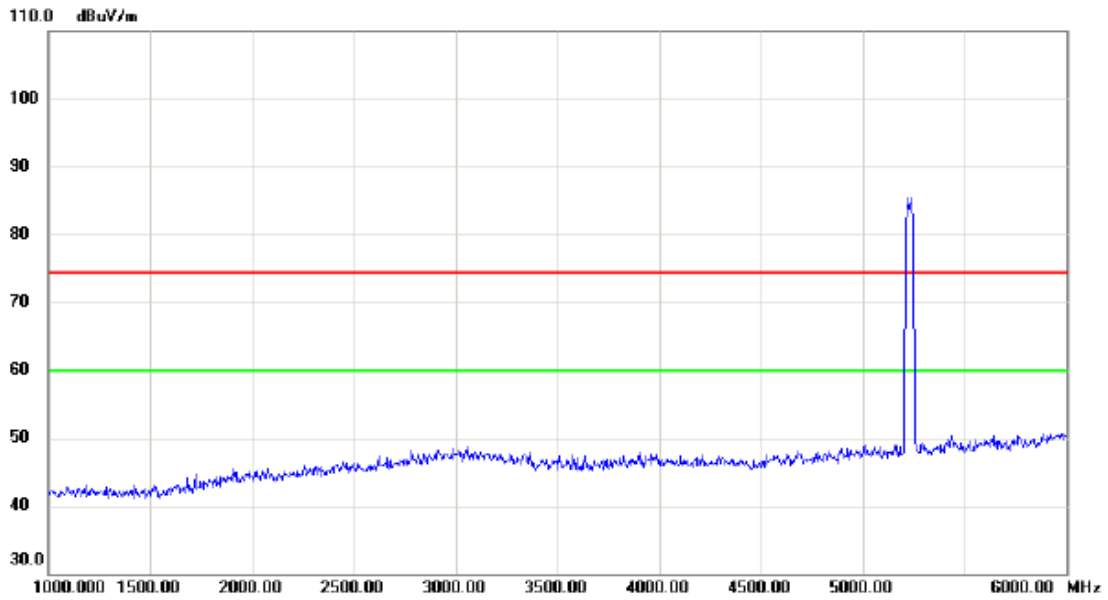

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |

### Horizontal

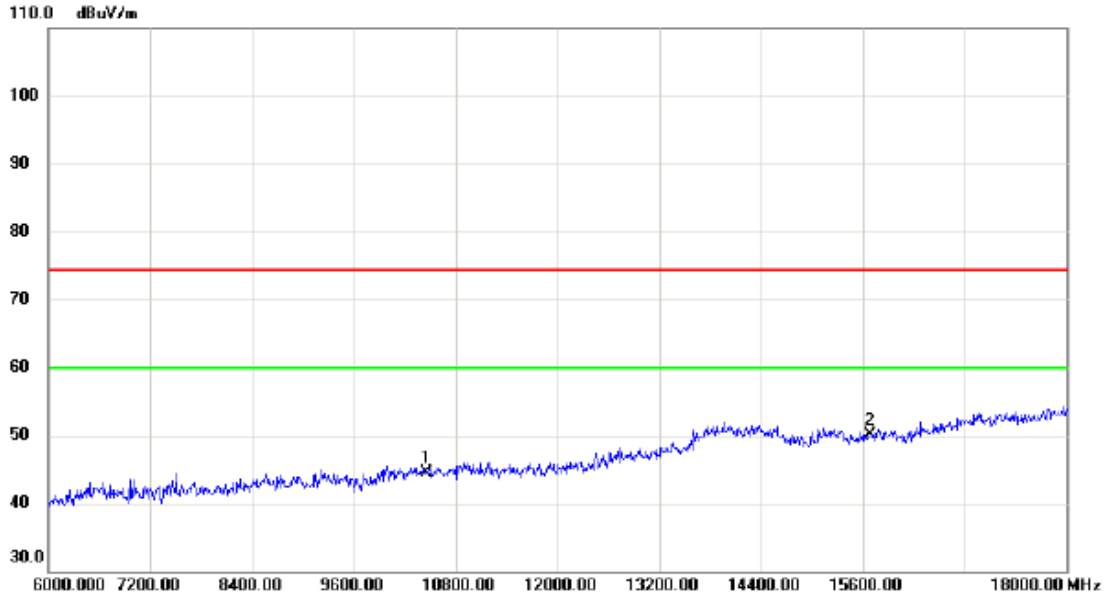


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10460.000    | 28.92                    | 15.49                   | 44.41                      | 74.30           | -29.89       | peak     |         |
| 2   | *   | 15690.000    | 31.13                    | 18.88                   | 50.01                      | 74.30           | -24.29       | peak     |         |



|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


### Horizontal

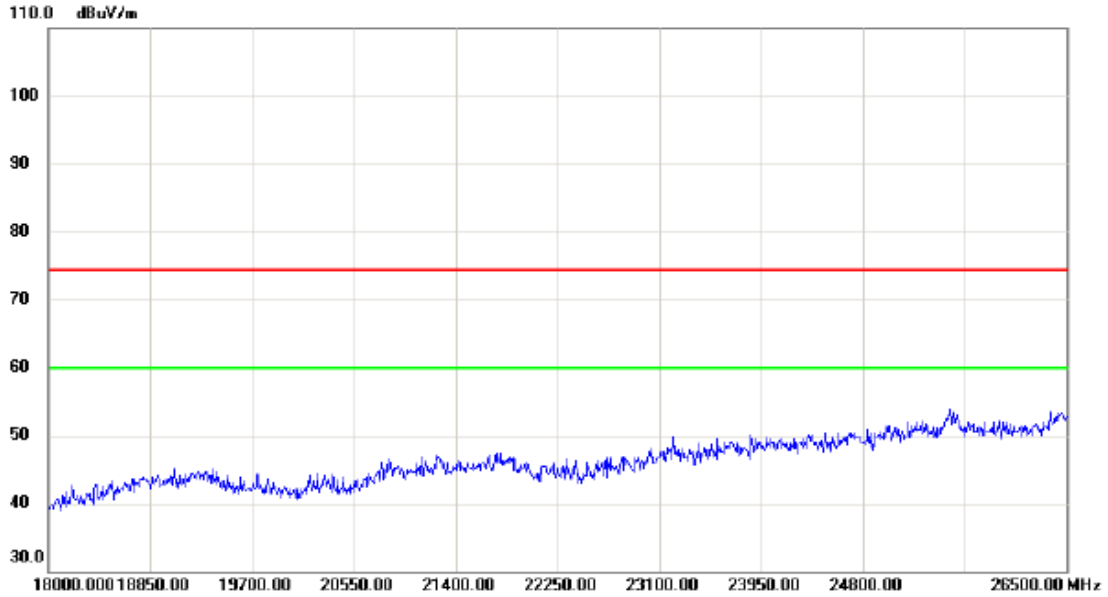

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                   |
|------------------|-----------------------------------|
| Orthogonal Axis: | X                                 |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz_ANT 0 |


### Horizontal

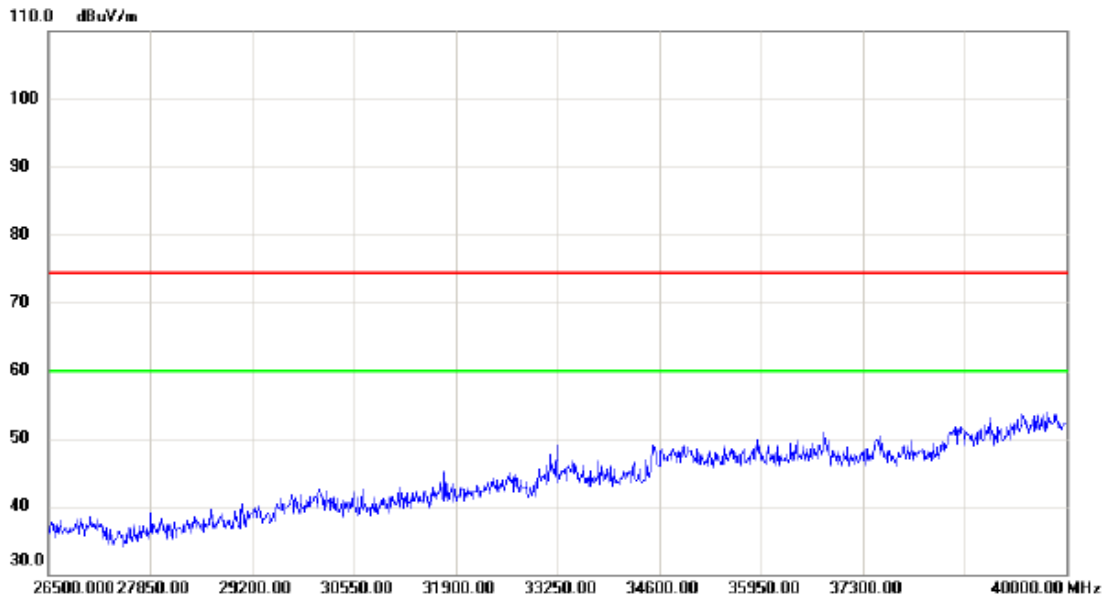

| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 26500.000 | 35            |                | 35          | 75     | 40     |          |         |
|     |     | 27850.00  | 35            |                | 35          | 75     | 40     |          |         |
|     |     | 29200.00  | 40            |                | 40          | 75     | 35     |          |         |
|     |     | 30550.00  | 40            |                | 40          | 75     | 35     |          |         |
|     |     | 31900.00  | 42            |                | 42          | 75     | 33     |          |         |
|     |     | 33250.00  | 45            |                | 45          | 75     | 30     |          |         |
|     |     | 34600.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 35950.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 37300.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 40000.00  | 52            |                | 52          | 75     | 23     |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


### Vertical

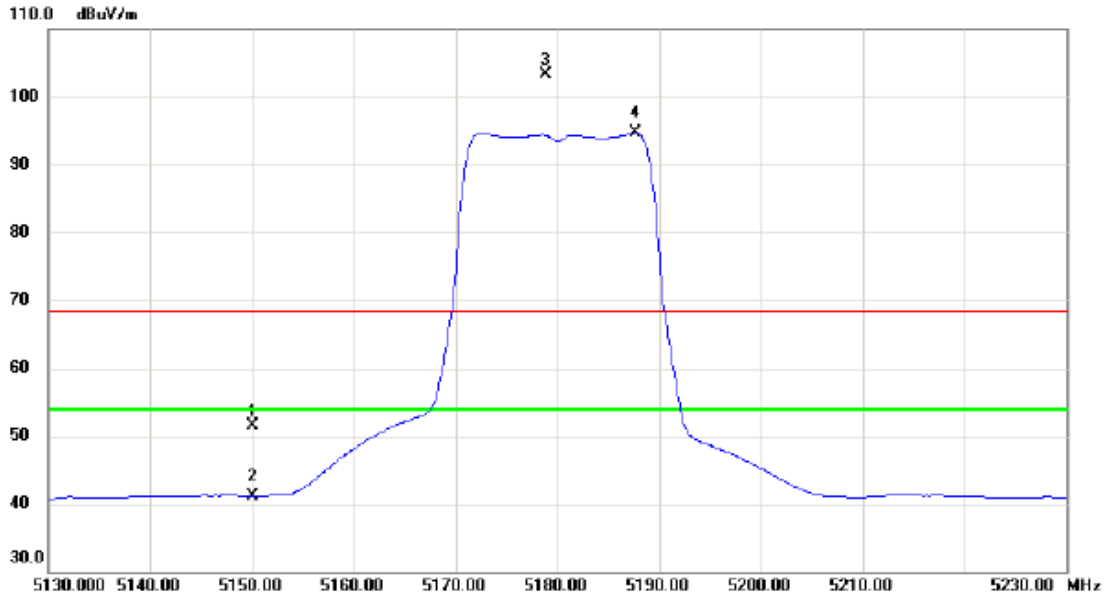

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5150.000     | 10.92                    | 40.63                   | 51.55                      | 68.30           | -16.75       | peak     |          |
| 2   |     | 5150.000     | 0.48                     | 40.63                   | 41.11                      | 54.00           | -12.89       | AVG      |          |
| 3   | X   | 5178.800     | 62.65                    | 40.72                   | 103.37                     | 68.30           | 35.07        | peak     | No Limit |
| 4   | *   | 5187.700     | 53.88                    | 40.75                   | 94.63                      | 54.00           | 40.63        | AVG      | No Limit |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


**Vertical**

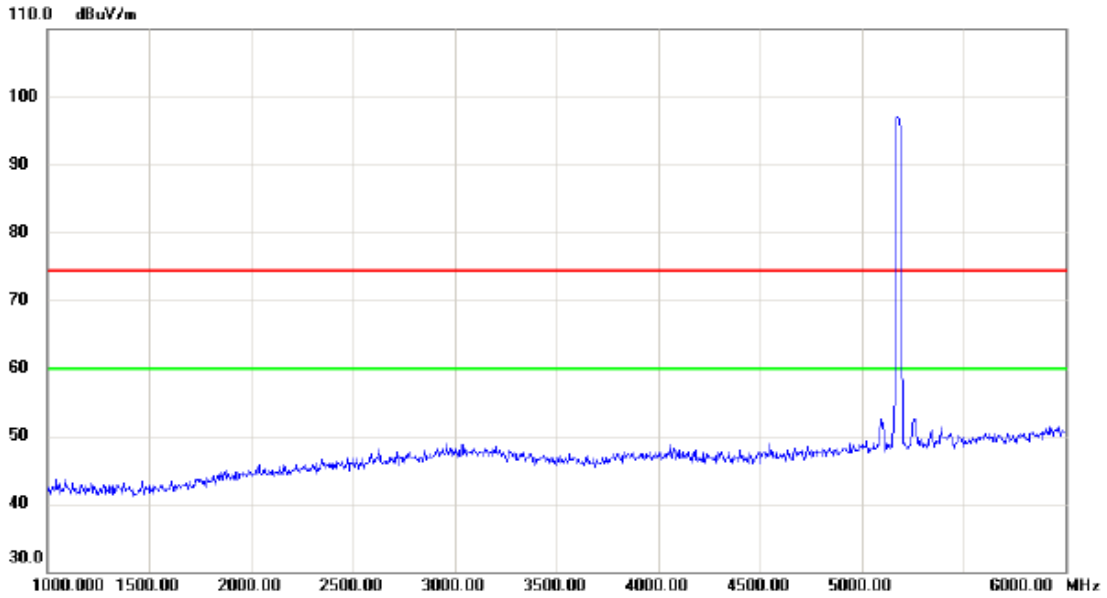

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 5180.00 | 95.0          | 0.0            | 95.0        | 74.0   | 21.0   |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


**Vertical**

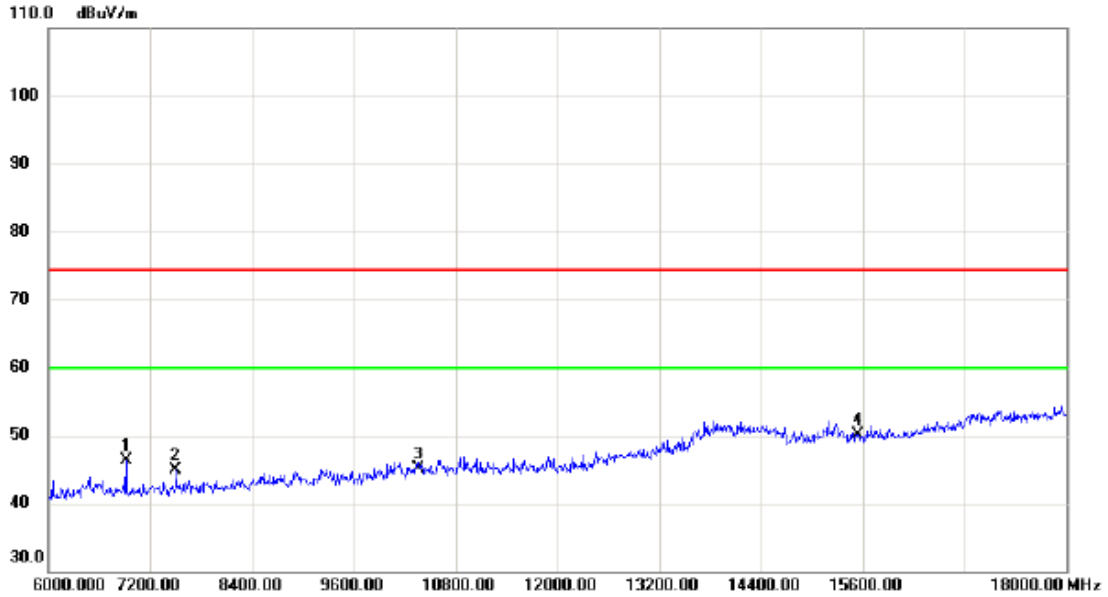

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6912.000     | 35.70                    | 10.69                   | 46.39                      | 74.30           | -27.91       | peak     |         |
| 2   |     | 7500.000     | 33.14                    | 11.76                   | 44.90                      | 74.30           | -29.40       | peak     |         |
| 3   |     | 10360.000    | 29.95                    | 15.23                   | 45.18                      | 74.30           | -29.12       | peak     |         |
| 4   | *   | 15540.000    | 31.23                    | 18.88                   | 50.11                      | 74.30           | -24.19       | peak     |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


**Vertical**

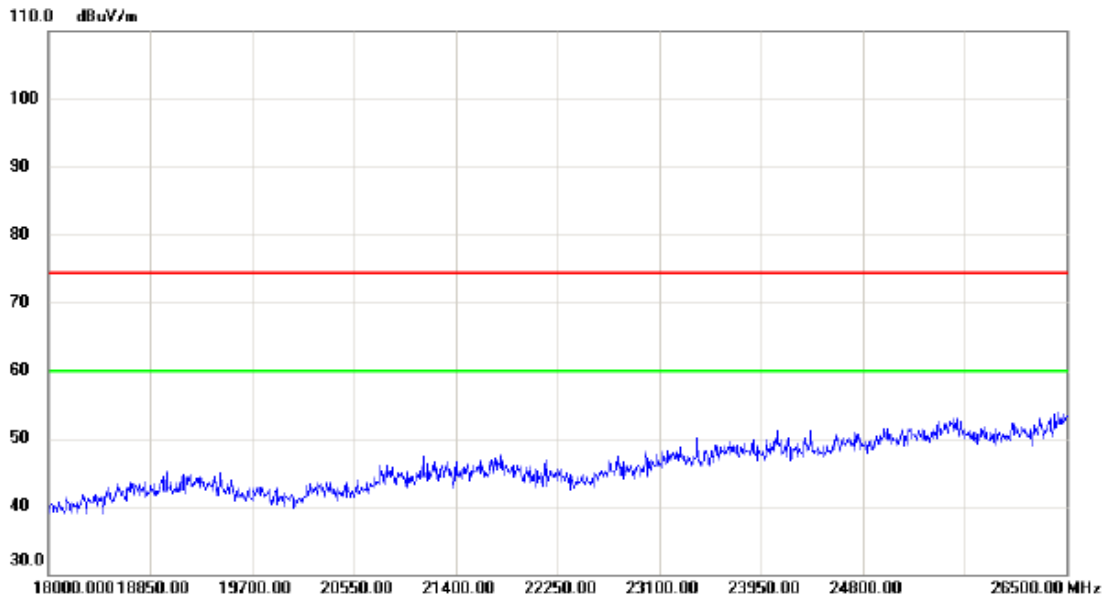

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


**Vertical**

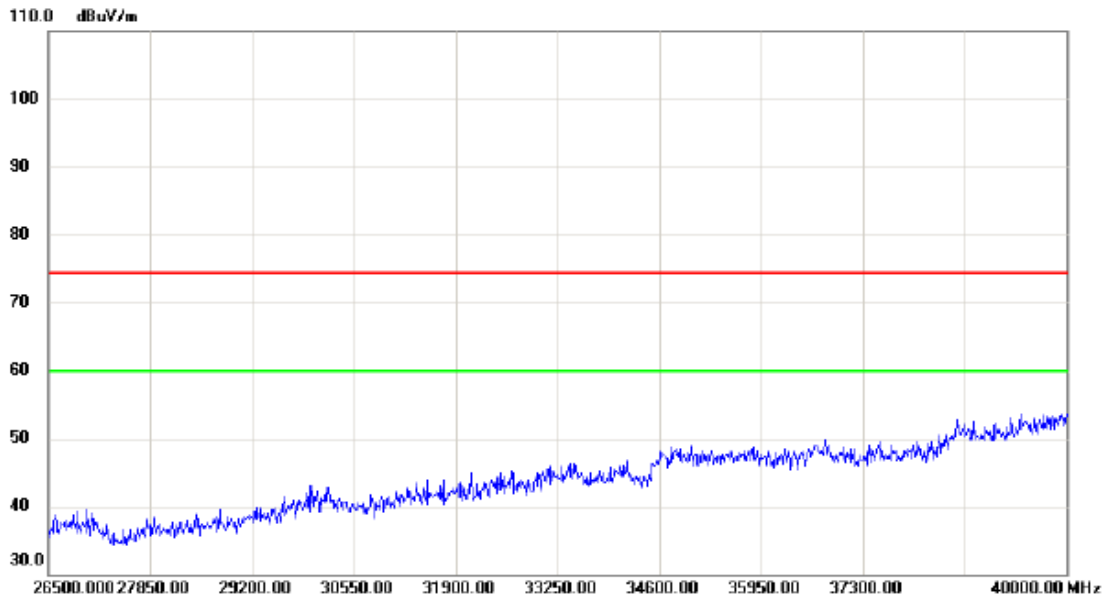

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |

### Horizontal

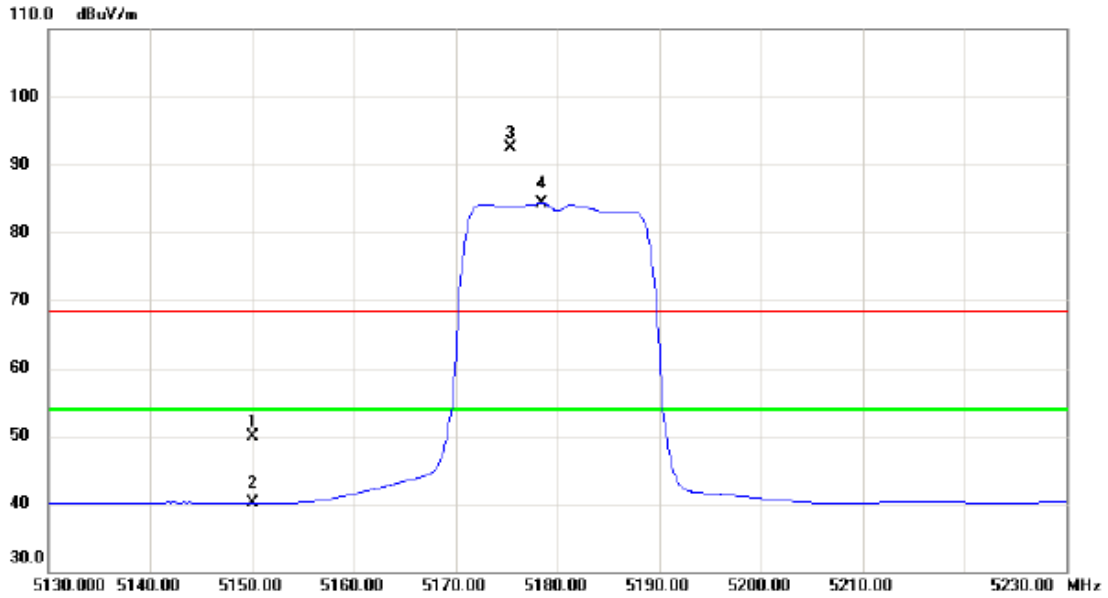


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5150.000     | 9.20                     | 40.63                   | 49.83                      | 68.30           | -18.47       | peak     |          |
| 2   |     | 5150.000     | -0.57                    | 40.63                   | 40.06                      | 54.00           | -13.94       | AVG      |          |
| 3   | X   | 5175.400     | 51.82                    | 40.71                   | 92.53                      | 68.30           | 24.23        | peak     | No Limit |
| 4   | *   | 5178.500     | 43.52                    | 40.72                   | 84.24                      | 54.00           | 30.24        | AVG      | No Limit |



|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


### Horizontal

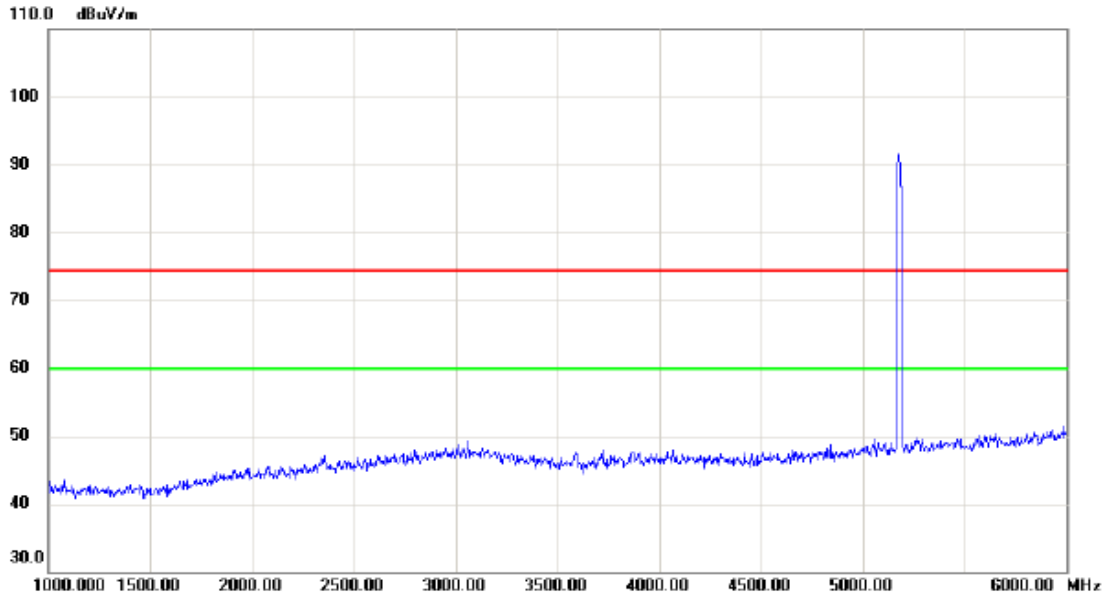

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 5180.00 | 90.0          | 0.0            | 90.0        | 74.0   | 16.0   |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


### Horizontal

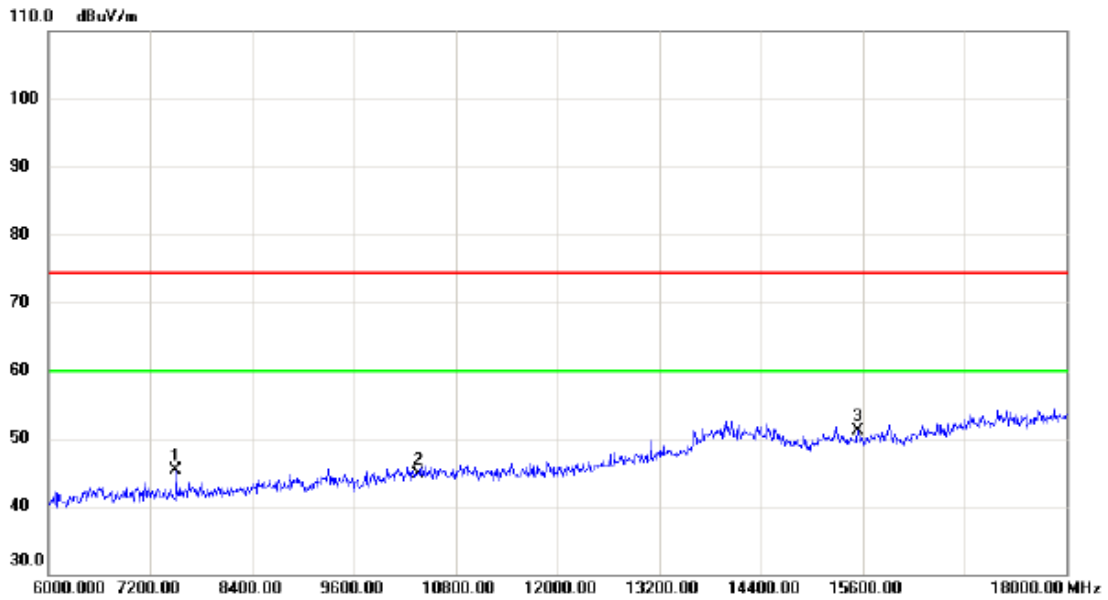

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7500.000     | 33.50                    | 11.76                   | 45.26                      | 74.30           | -29.04       | peak     |         |
| 2   |     | 10360.000    | 29.43                    | 15.23                   | 44.66                      | 74.30           | -29.64       | peak     |         |
| 3   | *   | 15540.000    | 32.18                    | 18.88                   | 51.06                      | 74.30           | -23.24       | peak     |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


### Horizontal

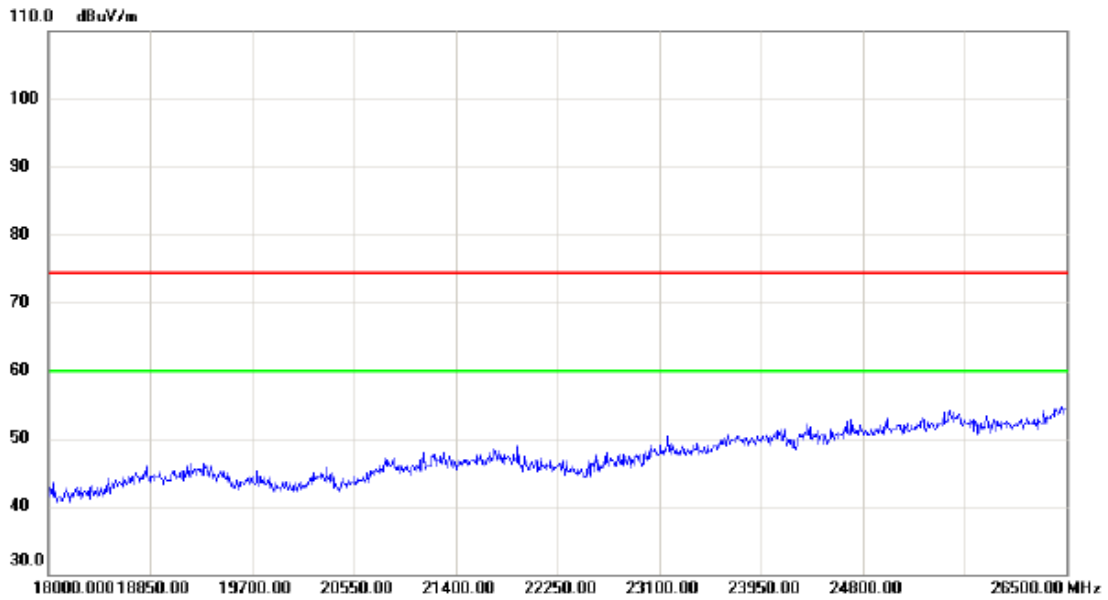

| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 18000.000 | 42            |                | 42          | 75     | 33     |          |         |
|     |     | 18850.00  | 45            |                | 45          | 75     | 30     |          |         |
|     |     | 19700.00  | 43            |                | 43          | 75     | 32     |          |         |
|     |     | 20550.00  | 45            |                | 45          | 75     | 30     |          |         |
|     |     | 21400.00  | 46            |                | 46          | 75     | 29     |          |         |
|     |     | 22250.00  | 45            |                | 45          | 75     | 30     |          |         |
|     |     | 23100.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 23950.00  | 50            |                | 50          | 75     | 25     |          |         |
|     |     | 24800.00  | 51            |                | 51          | 75     | 24     |          |         |
|     |     | 26500.00  | 54            |                | 54          | 75     | 21     |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5180MHz_ANT 0 |


**Horizontal**

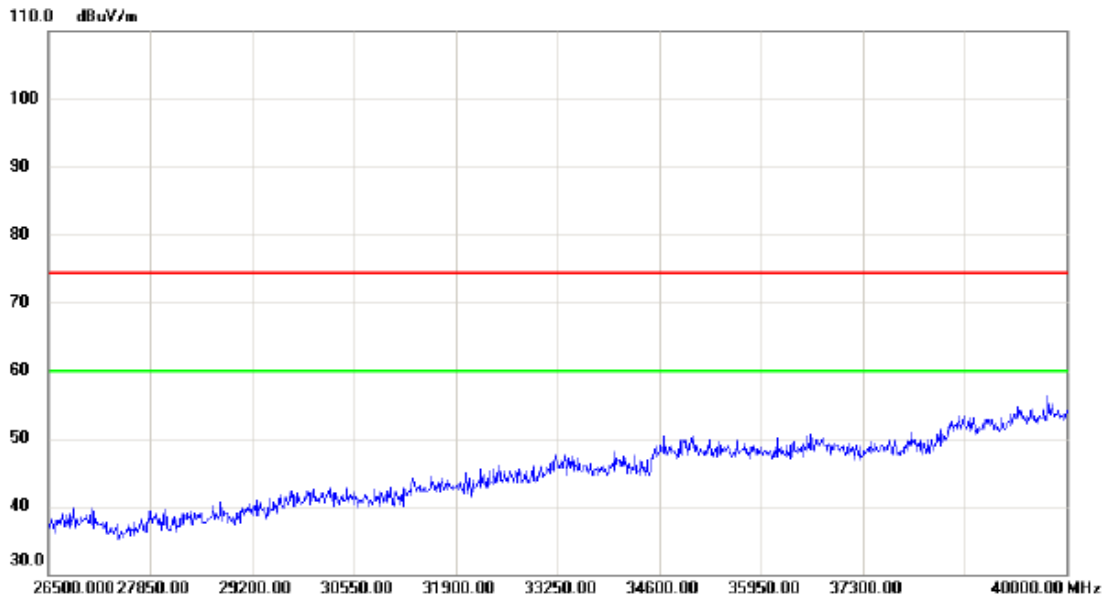

| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     | 26500.000 | 38            |                | 38          | 75     | 37     |          |         |
|     |     | 27850.00  | 38            |                | 38          | 75     | 37     |          |         |
|     |     | 29200.00  | 40            |                | 40          | 75     | 35     |          |         |
|     |     | 30550.00  | 42            |                | 42          | 75     | 33     |          |         |
|     |     | 31900.00  | 44            |                | 44          | 75     | 31     |          |         |
|     |     | 33250.00  | 46            |                | 46          | 75     | 29     |          |         |
|     |     | 34600.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 35950.00  | 48            |                | 48          | 75     | 27     |          |         |
|     |     | 37300.00  | 49            |                | 49          | 75     | 26     |          |         |
|     |     | 40000.00  | 55            |                | 55          | 75     | 20     |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |


**Vertical**

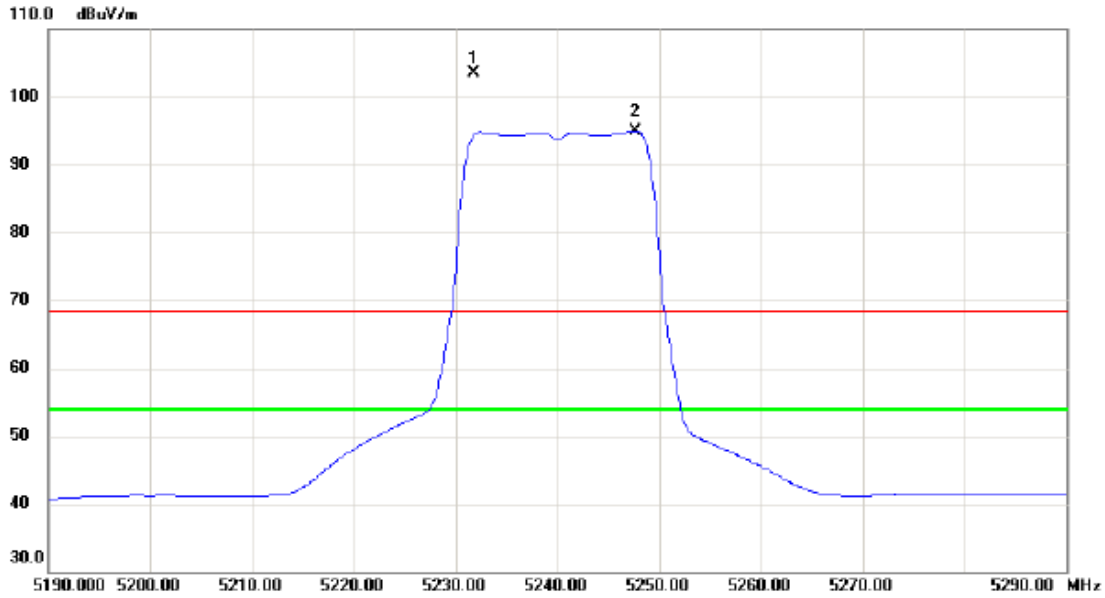

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |          |
| 1   | X   | 5231.800 | 62.69         | 40.90          | 103.59      | 68.30  | 35.29  | peak     | No Limit |
| 2   | *   | 5247.700 | 54.05         | 40.94          | 94.99       | 54.00  | 40.99  | AVG      | No Limit |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |


**Vertical**

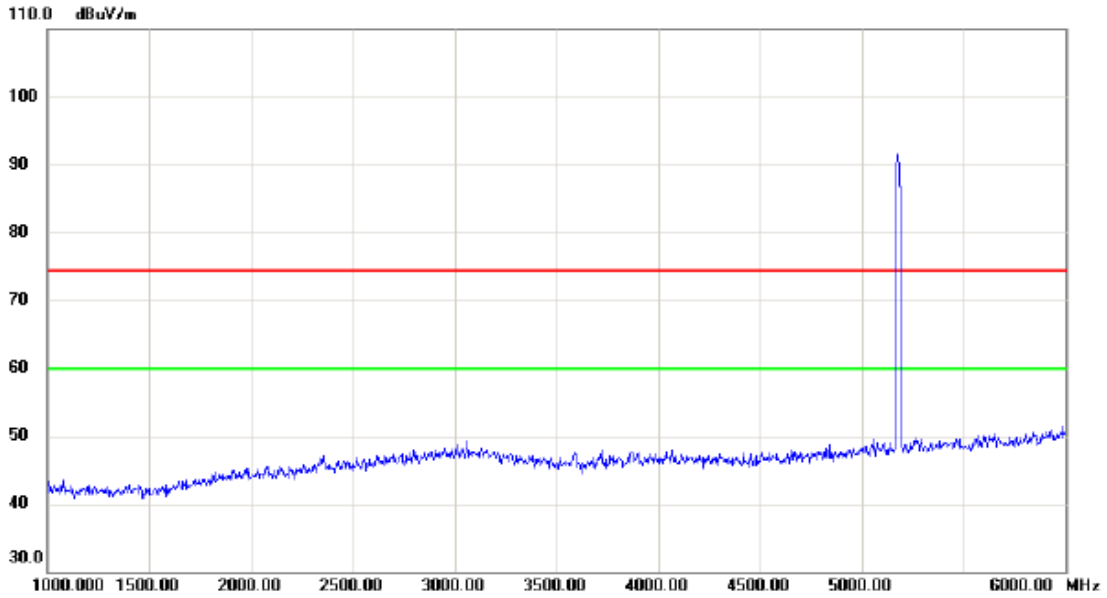

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |


**Vertical**

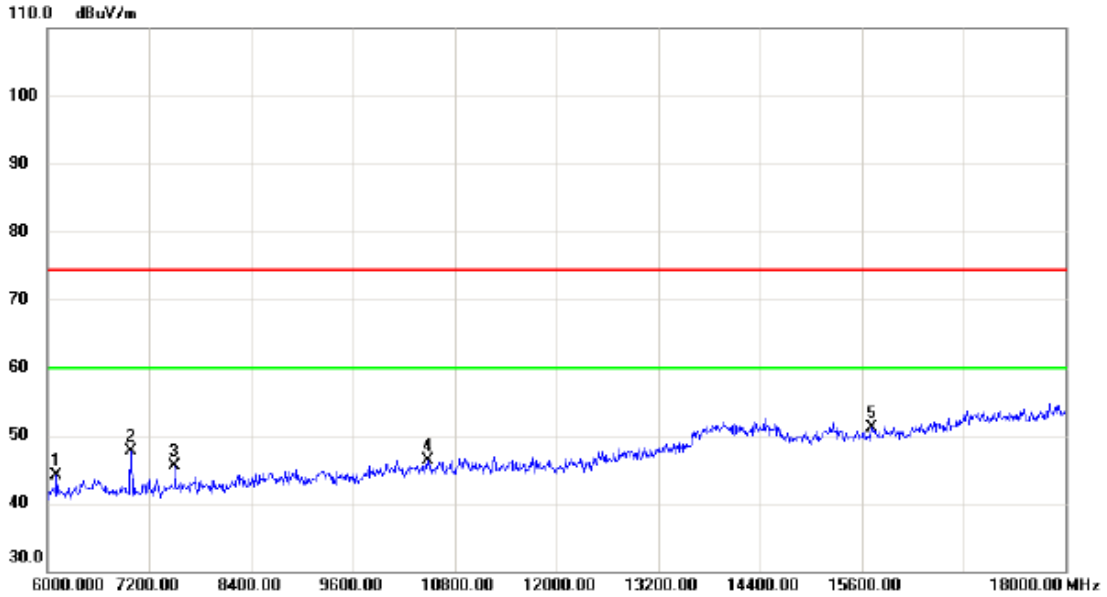

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6108.000     | 34.64                    | 9.45                    | 44.09                      | 74.30           | -30.21       | peak     |         |
| 2   |     | 6984.000     | 37.01                    | 10.65                   | 47.66                      | 74.30           | -26.64       | peak     |         |
| 3   |     | 7500.000     | 33.71                    | 11.76                   | 45.47                      | 74.30           | -28.83       | peak     |         |
| 4   |     | 10480.000    | 30.71                    | 15.54                   | 46.25                      | 74.30           | -28.05       | peak     |         |
| 5   | *   | 15720.000    | 32.22                    | 18.87                   | 51.09                      | 74.30           | -23.21       | peak     |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |

**Vertical**

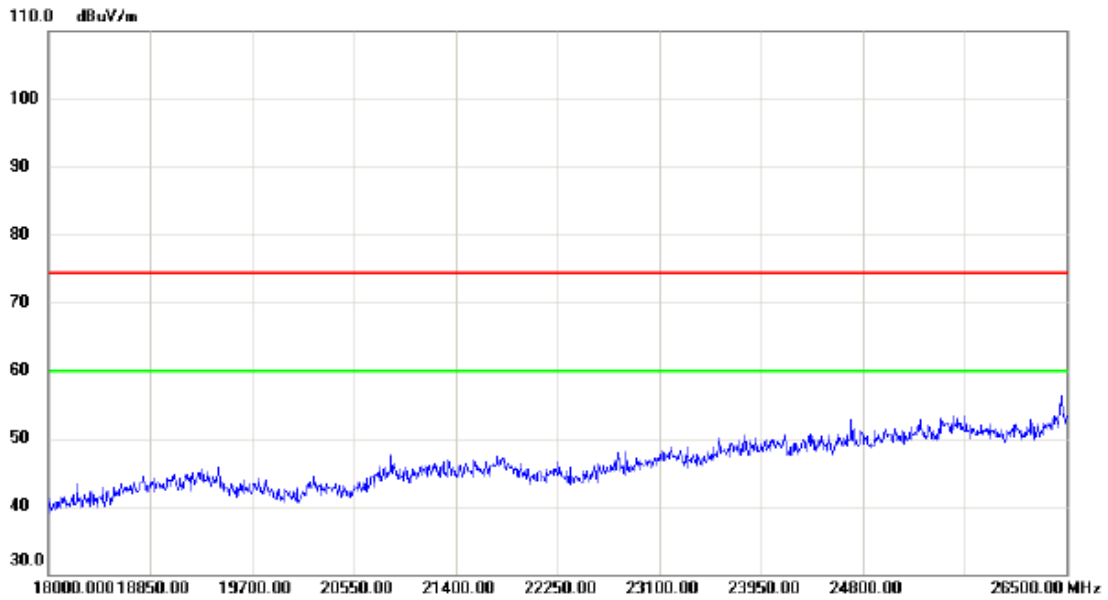


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |



|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |


**Vertical**

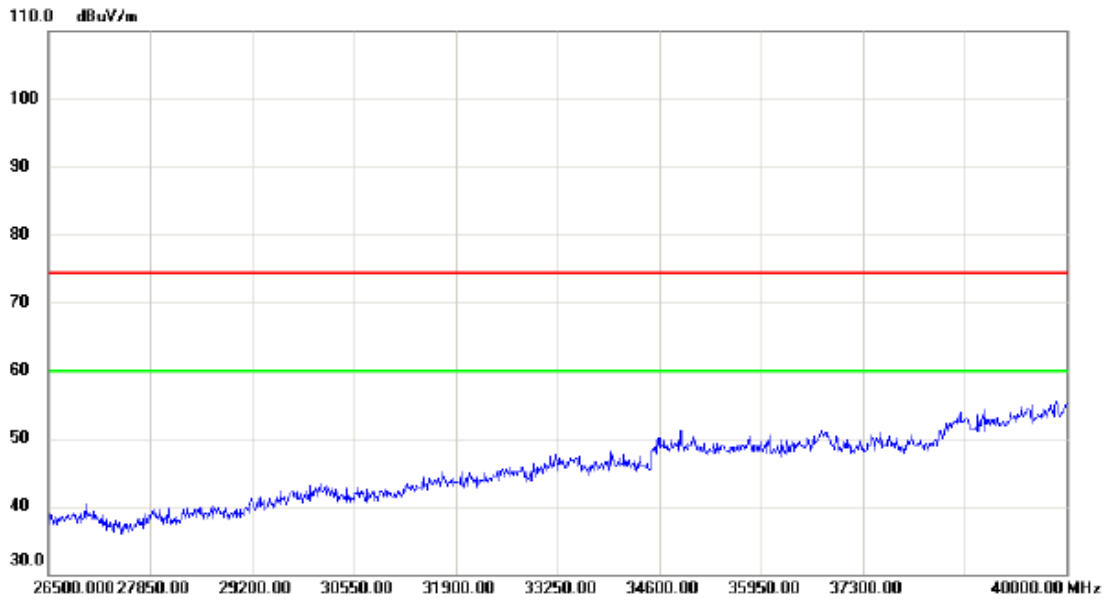

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
|     |     |       |               |                |             |        |        |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |


### Horizontal

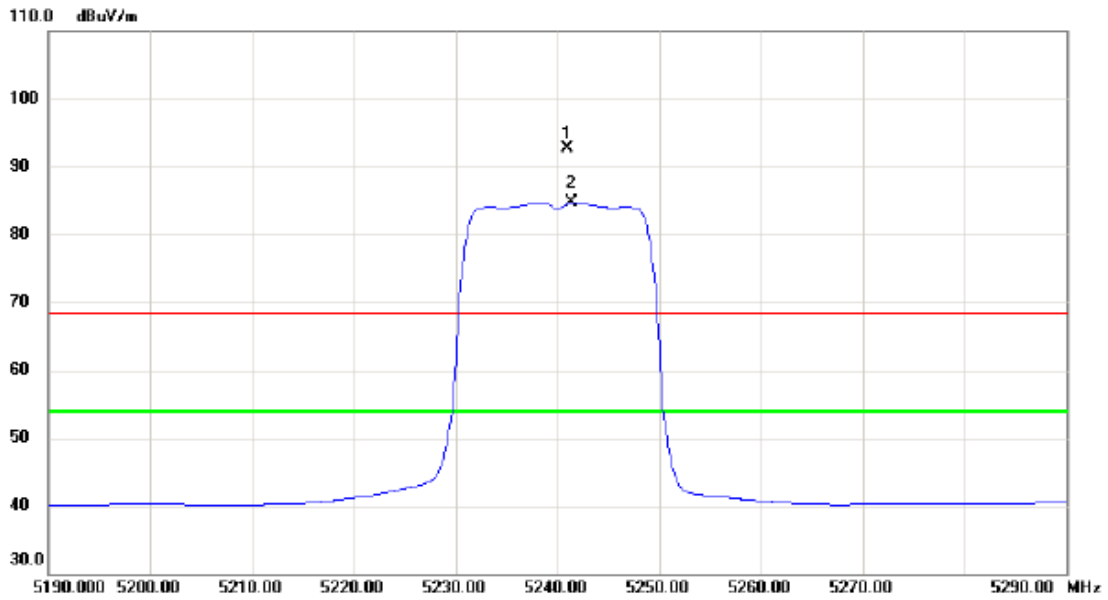

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |          |
| 1   | X   | 5241.000 | 51.69         | 40.93          | 92.62       | 68.30  | 24.32  | peak     | No Limit |
| 2   | *   | 5241.400 | 43.78         | 40.93          | 84.71       | 54.00  | 30.71  | AVG      | No Limit |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |


**Horizontal**

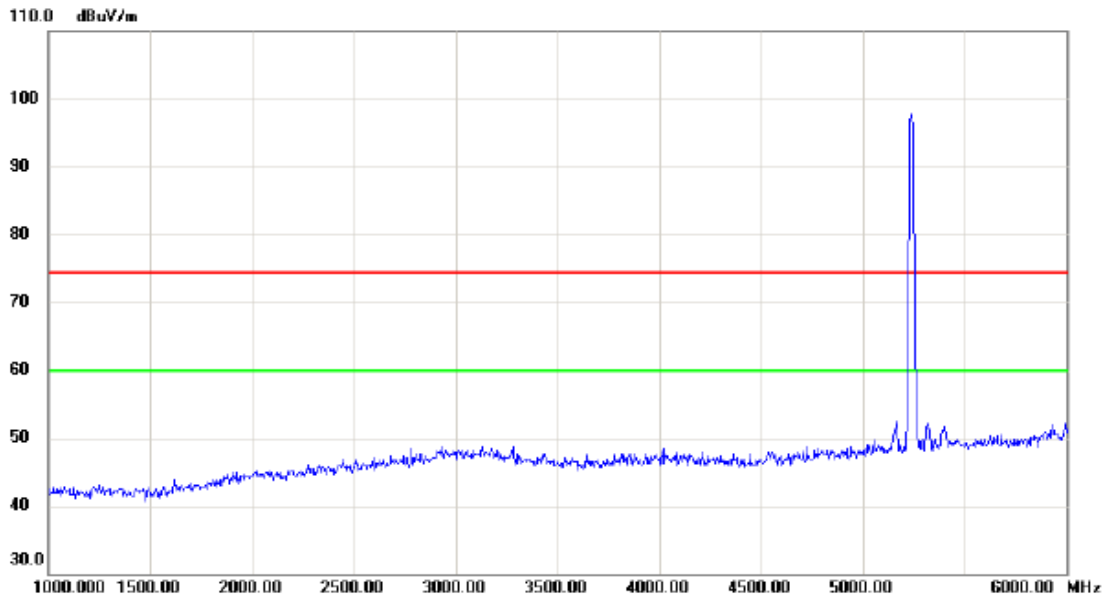

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                                    |
|------------------|------------------------------------|
| Orthogonal Axis: | X                                  |
| Test Mode:       | UNII-1/ TX AC20 Mode 5240MHz_ANT 0 |

**Horizontal**

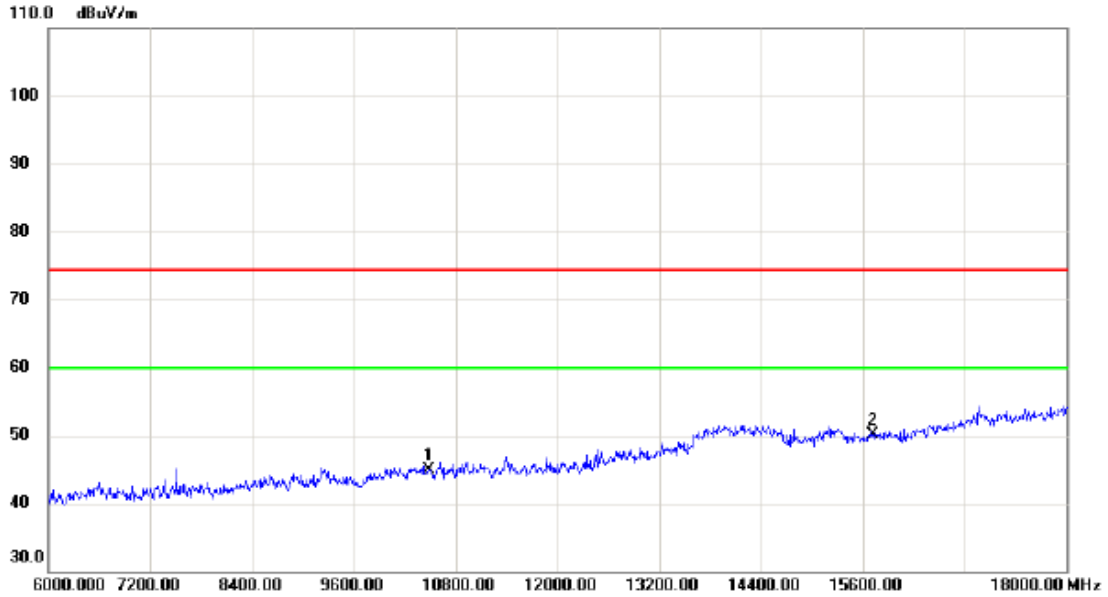

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10480.000    | 29.45                    | 15.54                   | 44.99                      | 74.30           | -29.31       | peak     |         |
| 2   | *   | 15720.000    | 31.16                    | 18.87                   | 50.03                      | 74.30           | -24.27       | peak     |         |