


## Appendix F

# Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109

# 1 Test Result of E800 without adapter

## GPRS850

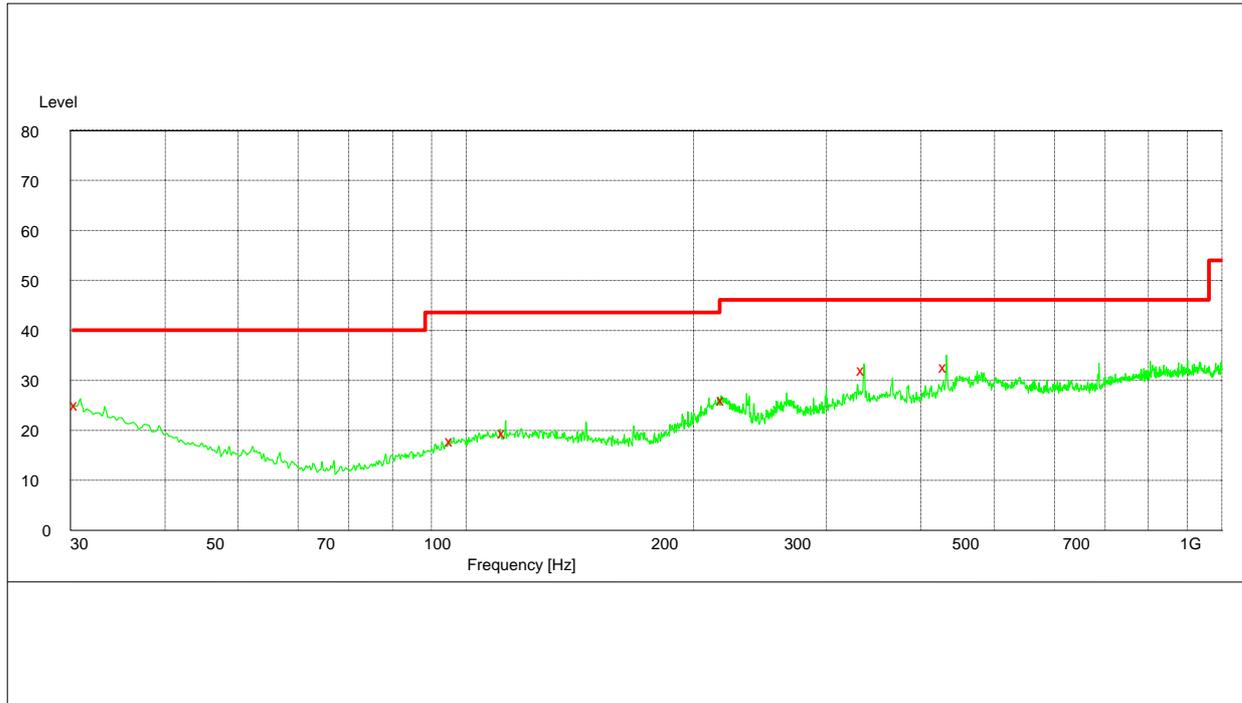


### MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
30.600000	24.20	-4.4	40.0	15.8	102.0	36.00	HORIZONTAL
96.000000	18.40	-11.5	43.5	15.1	105.0	349.00	VERTICAL
112.680000	19.80	-9.8	43.5	23.7	105.0	89.00	VERTICAL
219.240000	25.80	-11.4	46.0	14.2	134.0	77.00	HORIZONTAL
336.000000	32.20	-5.9	46.0	13.8	100.0	126.00	HORIZONTAL
432.000000	32.90	-3.9	46.0	13.1	195.0	309.00	HORIZONTAL

## 2 Test Result of E800 with adapter

### GPRS850

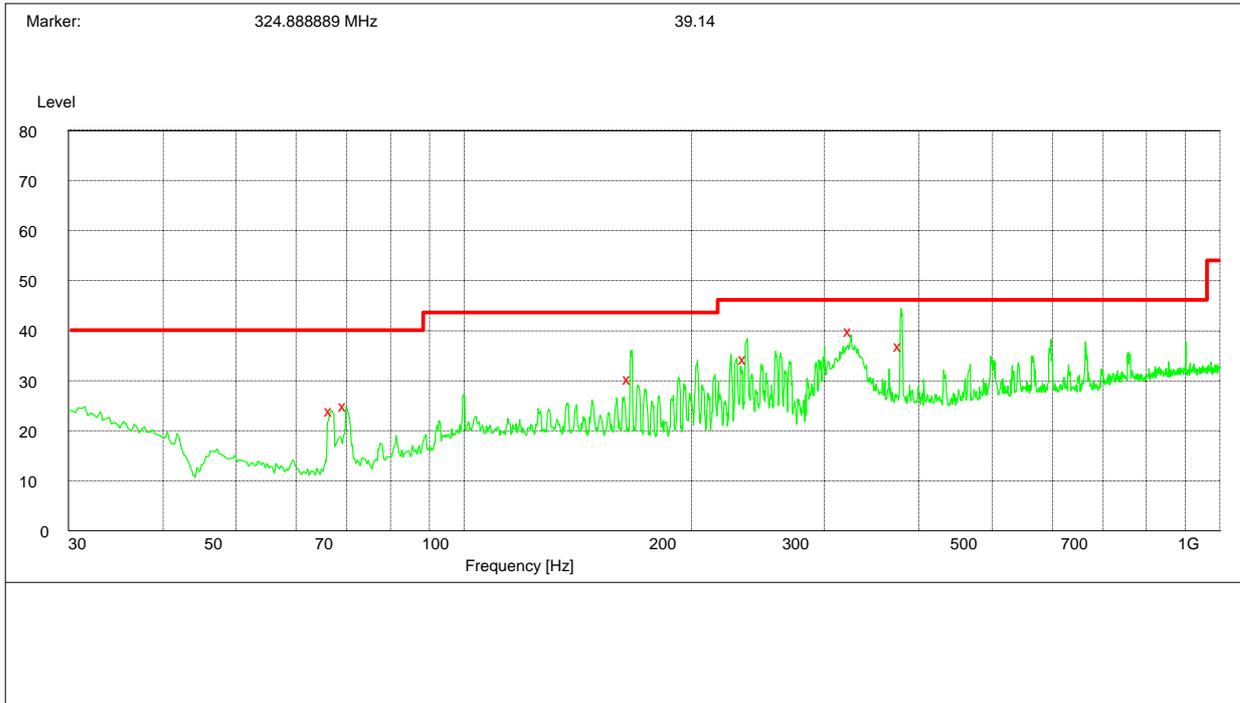

MEASUREMENT RESULT: QP\_Detector"

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
66.900000	24.00	-11.5	40.0	16.0	150.0	200.00	HORIZONTAL
69.900000	25.00	-11.5	40.0	15.0	160.0	254.00	HORIZONTAL
166.080000	30.50	-11.5	43.5	13.0	182.0	254.00	HORIZONTAL
236.280000	34.40	-9.0	46.0	11.6	147.0	245.00	HORIZONTAL
324.800000	40.00	-5.8	46.0	6.0	150.0	200.00	HORIZONTAL
378.540000	37.10	-4.8	46.0	8.9	100.0	0.00	HORIZONTAL