


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.39	17.10
CH60	5300	20.59	17.10
CH64	5320	20.39	17.10

TX CH52

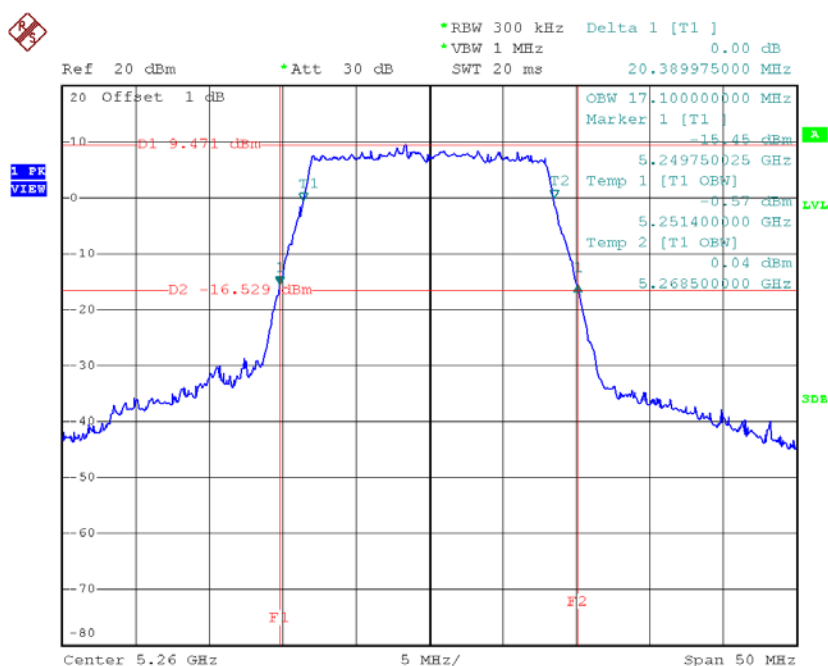


Date: 5.JUL.2015 17:56:14

TX CH60

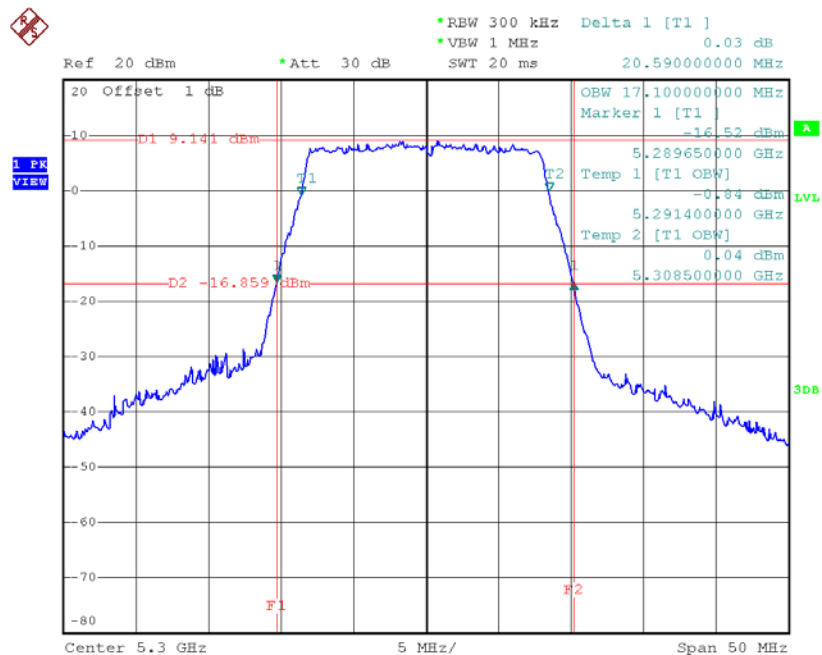

Date: 5.JUL.2015 17:57:53

TX CH64

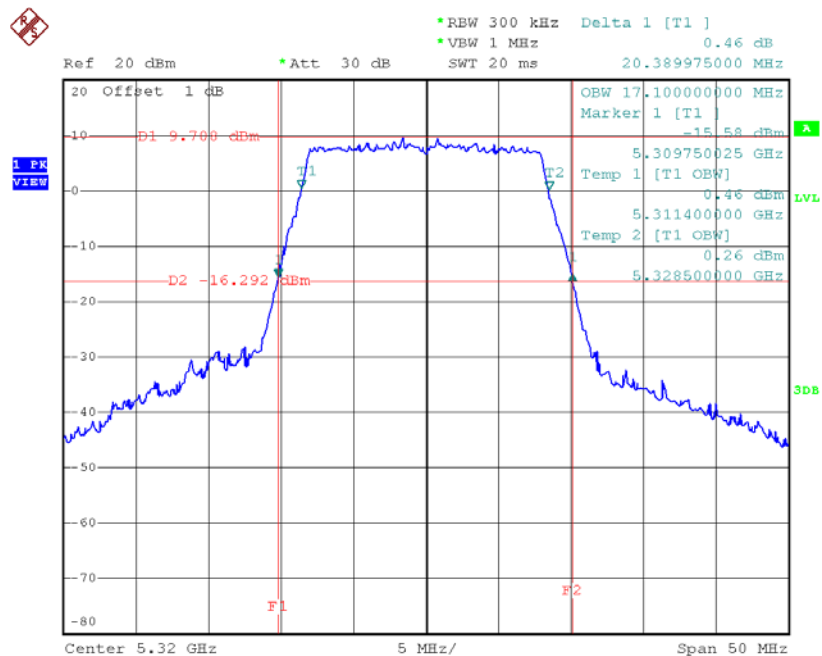


Date: 5.JUL.2015 17:58:46

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.95	18.10
CH60	5300	20.95	18.00
CH64	5320	20.60	17.90

TX CH52

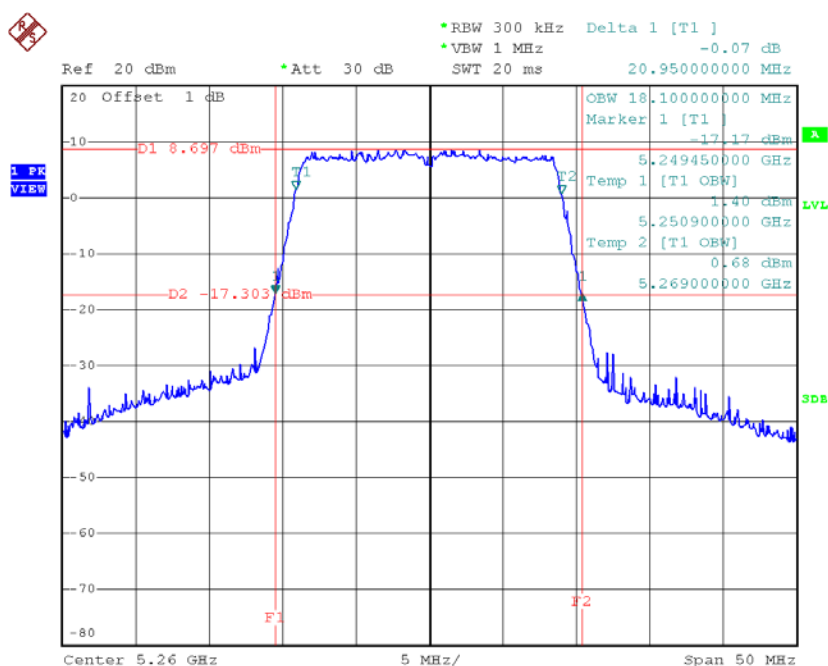


Date: 5.JUL.2015 18:11:29

TX CH60

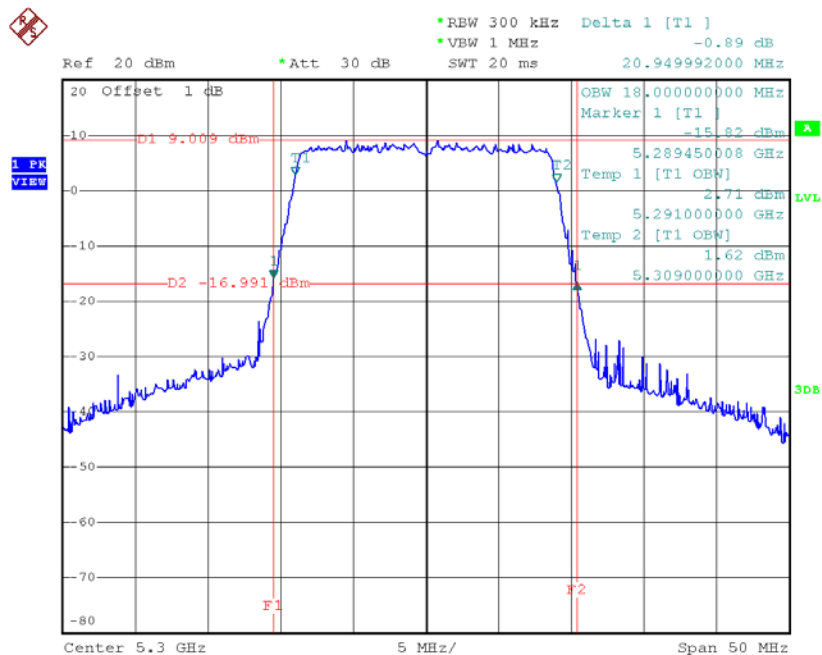

Date: 5.JUL.2015 18:13:03

TX CH64

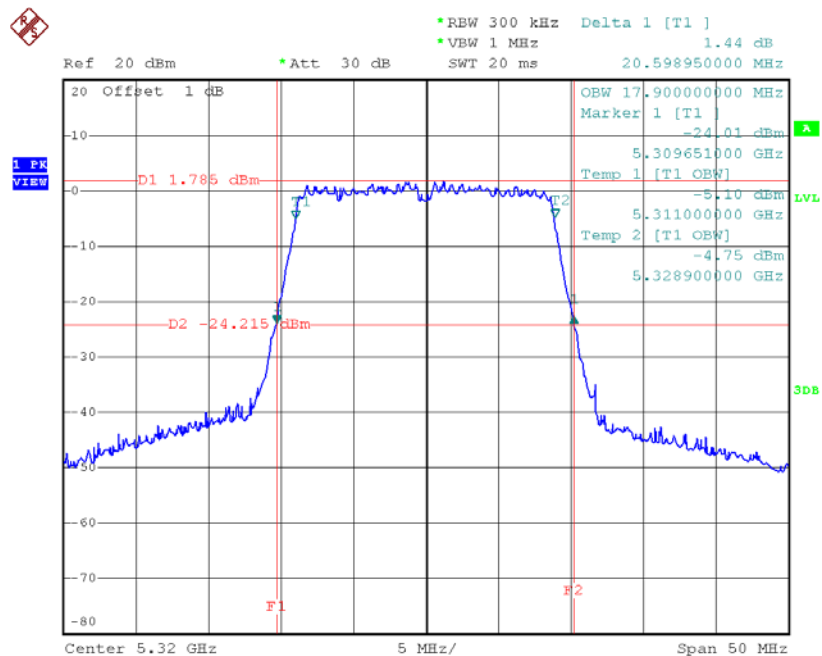


Date: 16.AUG.2015 13:36:12

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	39.41	36.40
CH62	5310	39.30	36.40

TX CH54

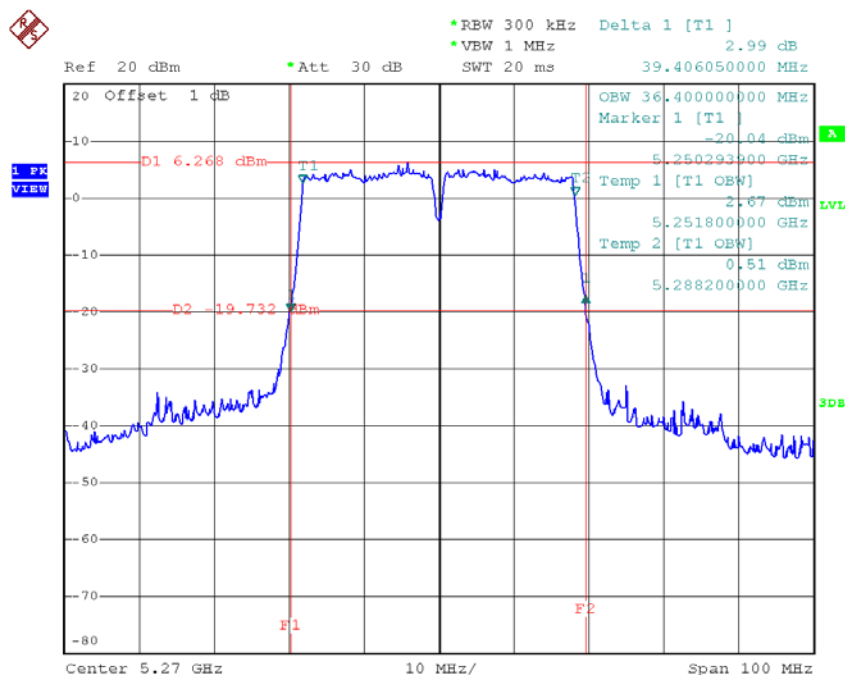

Date: 5.JUL.2015 20:30:54

TX CH62

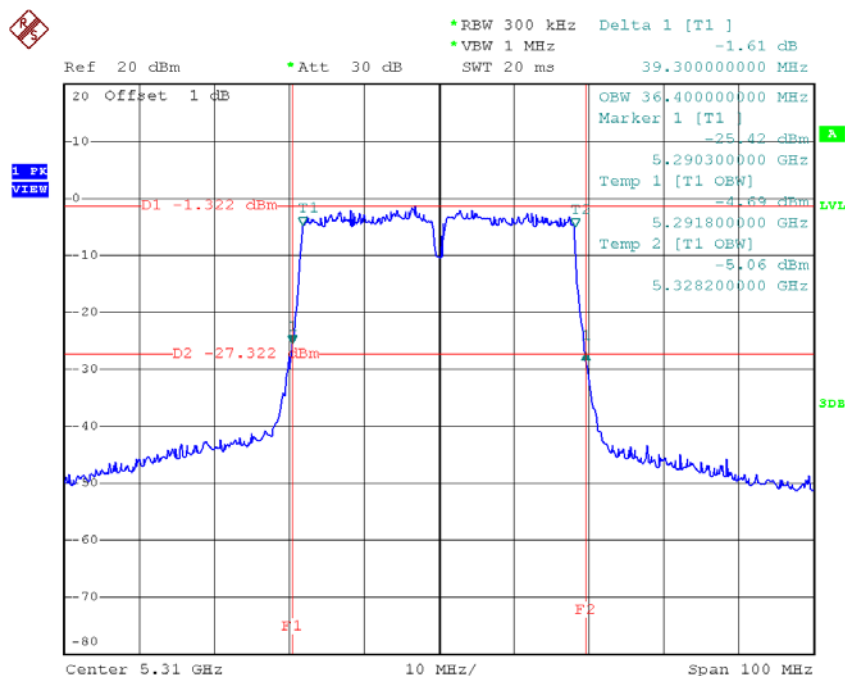


Date: 16.AUG.2015 13:47:55

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.60	17.10
CH116	5580	20.59	17.10
CH140	5700	20.55	17.10

TX CH100

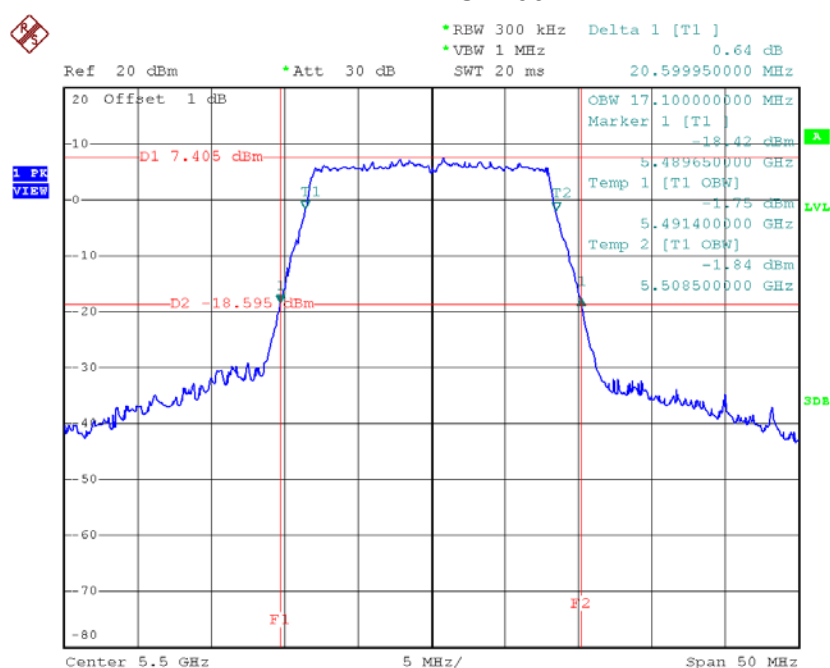


Date: 5.JUL.2015 18:00:22

TX CH116

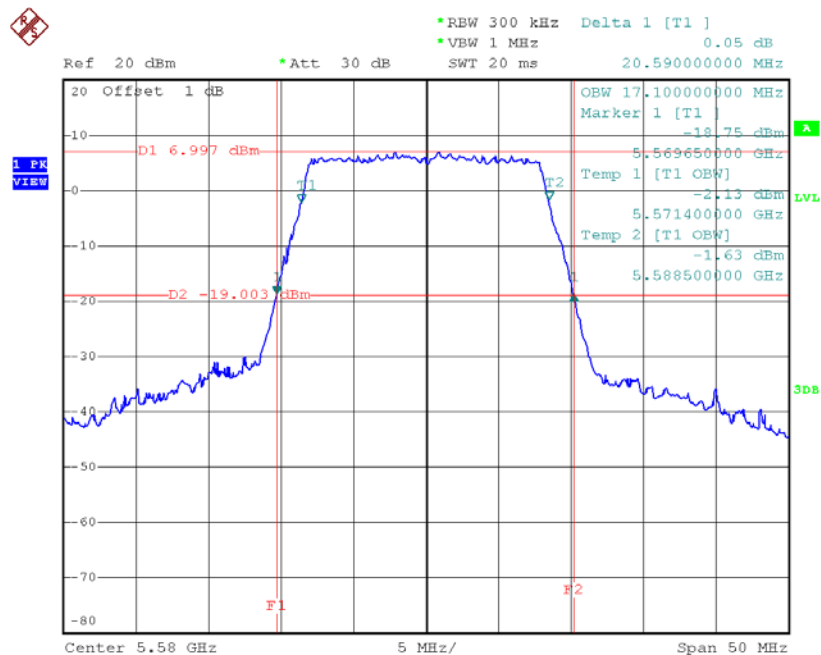

Date: 5.JUL.2015 18:01:55

TX CH140

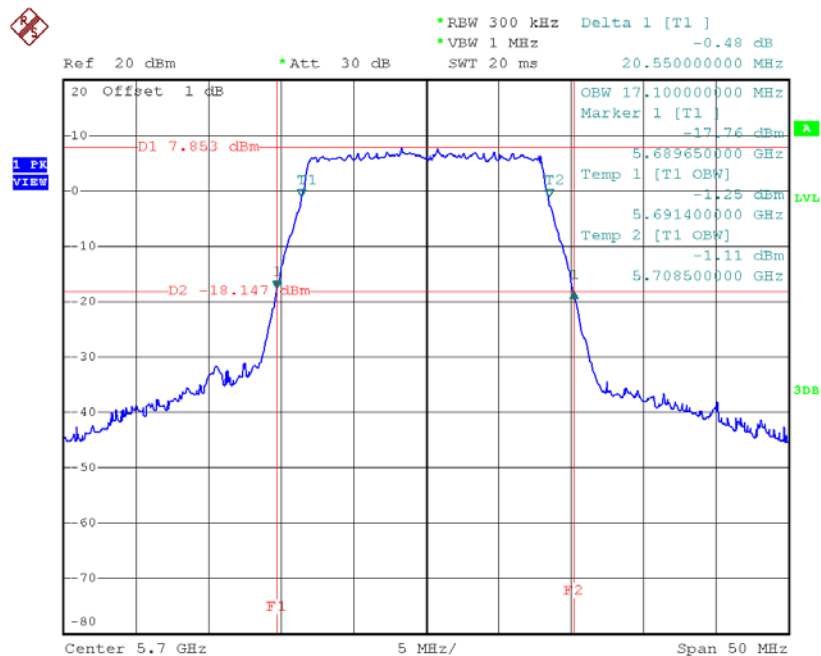


Date: 5.JUL.2015 18:02:46

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.65	17.90
CH116	5580	20.95	18.10
CH140	5700	20.85	18.00

TX CH100

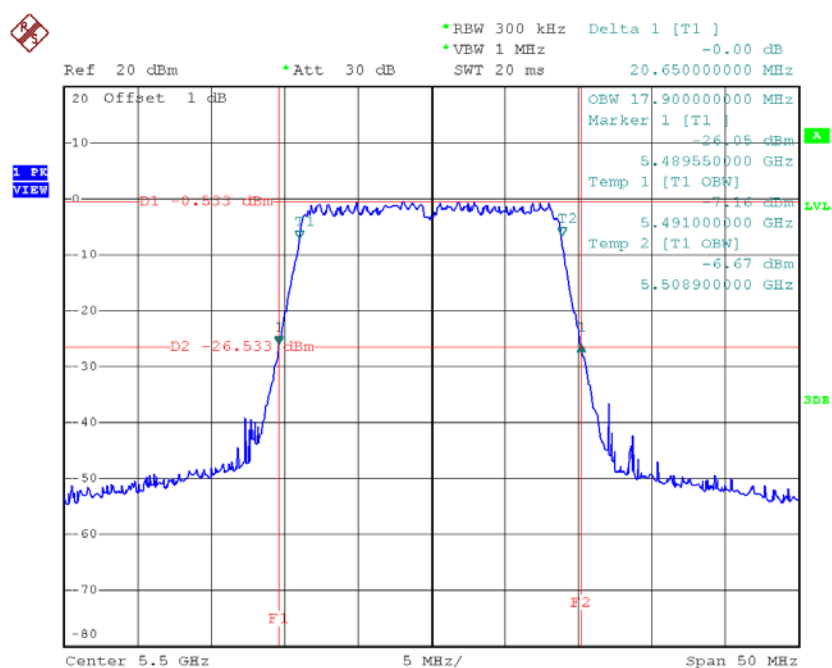


Date: 16.AUG.2015 13:42:23

TX CH116

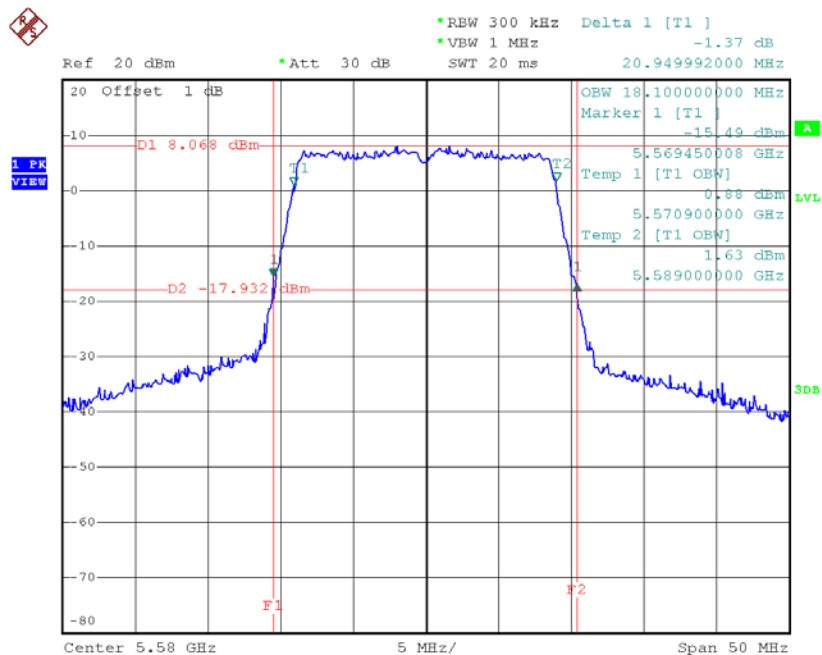

Date: 5.JUL.2015 18:15:55

TX CH140

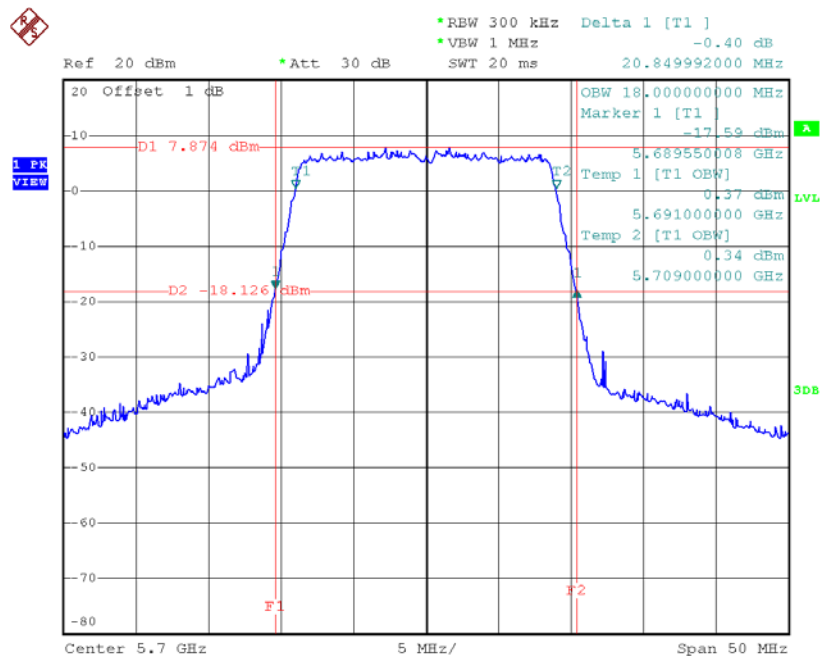


Date: 5.JUL.2015 18:16:36

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.60	36.40
CH110	5550	39.80	36.40
CH134	5670	39.90	36.40

TX CH102

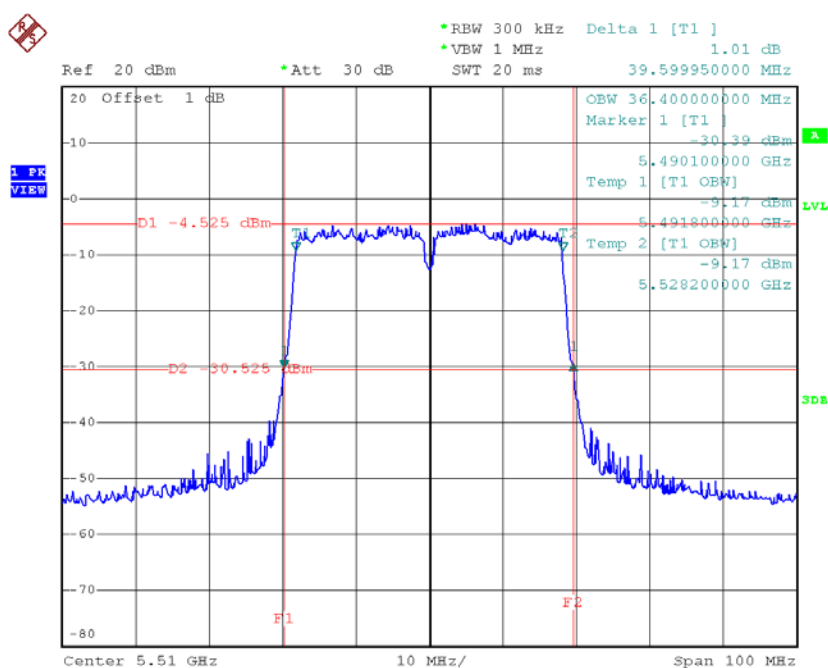


Date: 16.AUG.2015 13:54:15

TX CH110

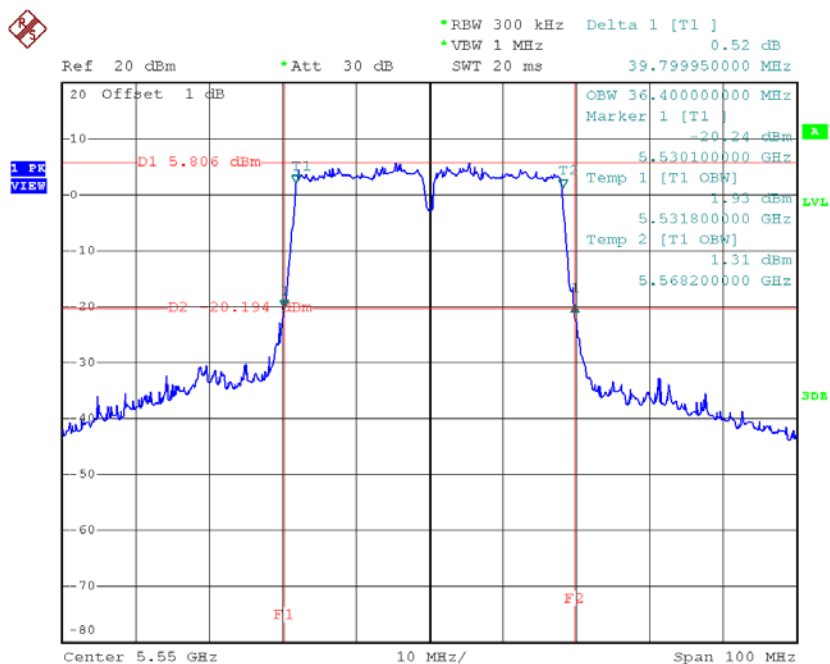

Date: 5.JUL.2015 20:33:48

TX CH134

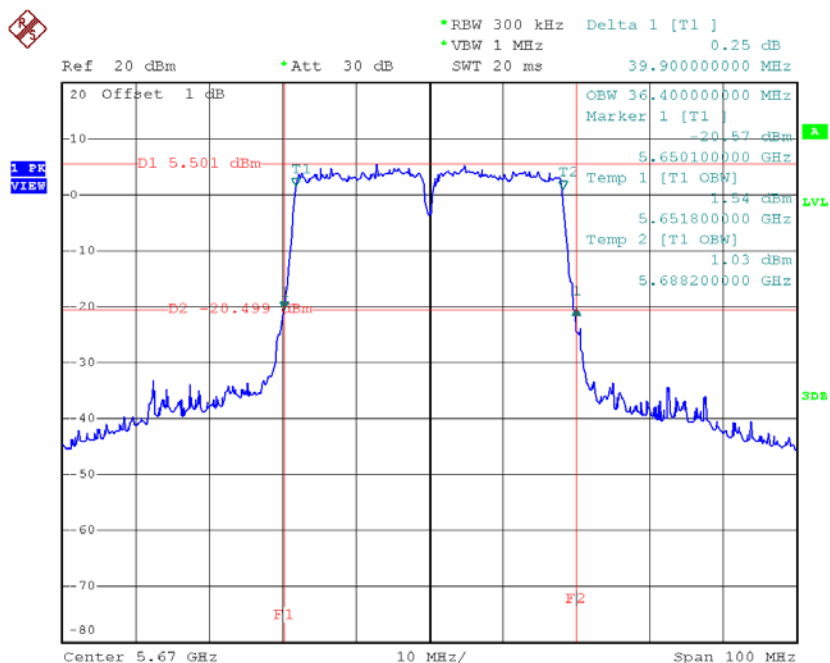


Date: 5.JUL.2015 20:34:40

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.75	17.10	>=500
CH157	5785	16.55	17.10	>=500
CH165	5825	16.59	17.10	>=500

TX CH 149

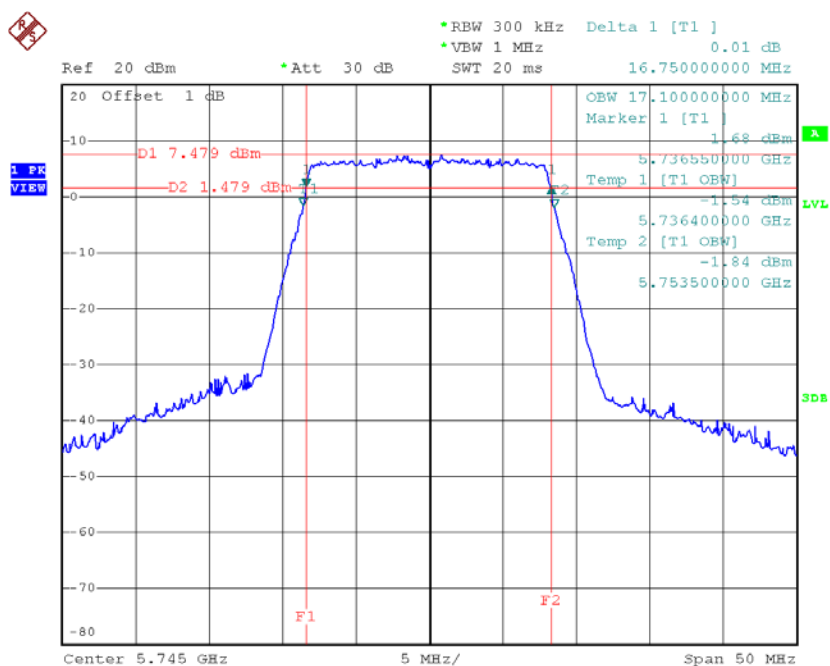


Date: 5.JUL.2015 18:03:41

TX CH 157

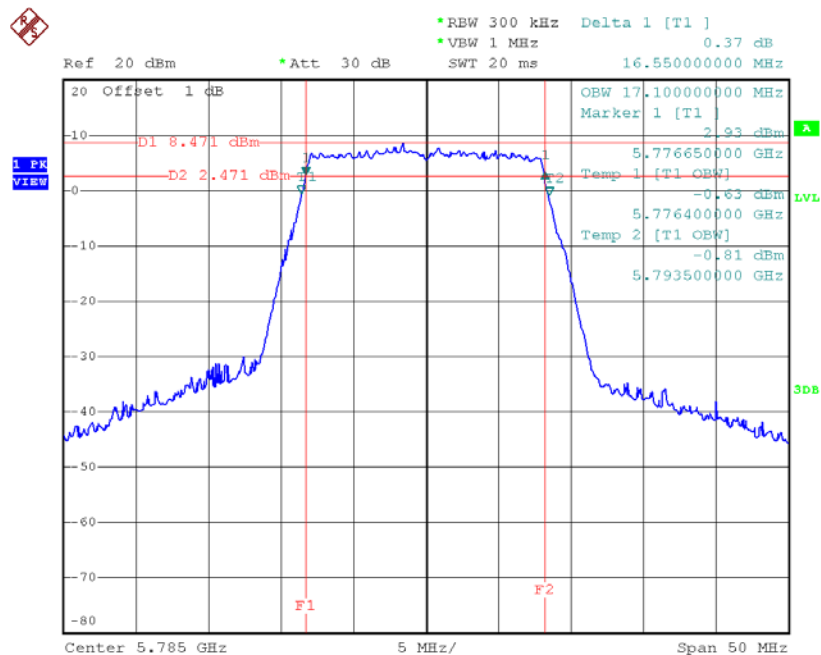

Date: 5.JUL.2015 18:05:35

TX CH 165

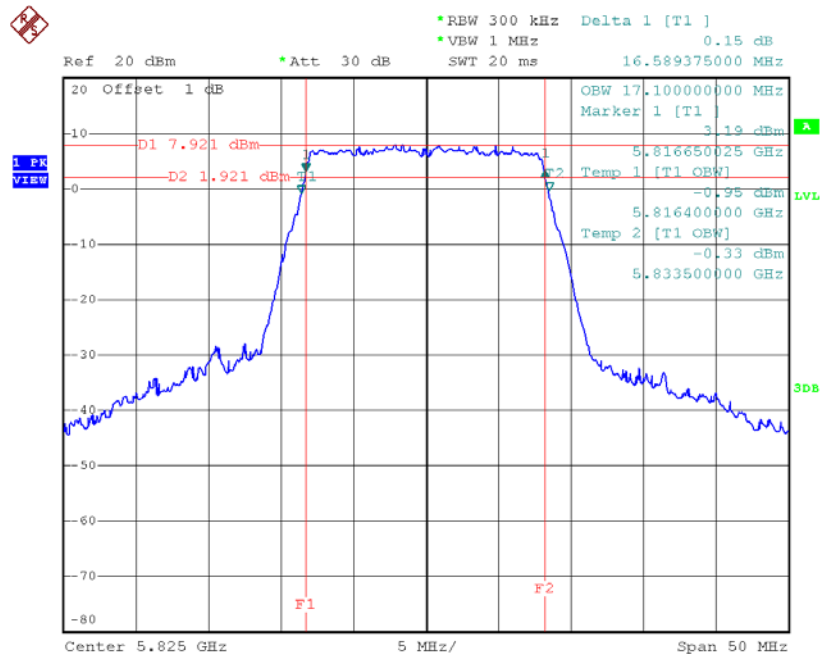


Date: 5.JUL.2015 18:06:32

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	18.00	>=500
CH157	5785	17.80	18.10	>=500
CH165	5825	17.79	18.10	>=500

TX CH 149

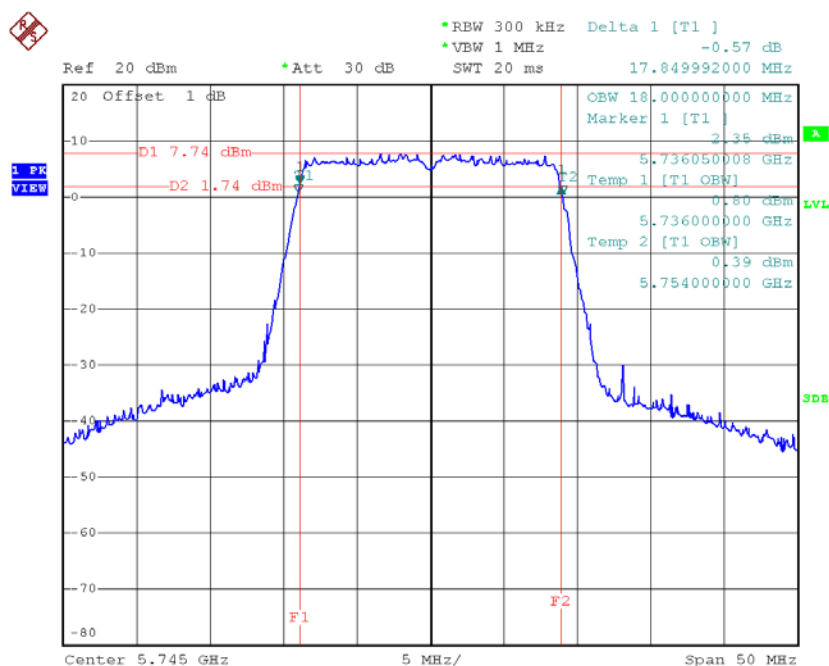


Date: 5.JUL.2015 18:17:34

TX CH 157

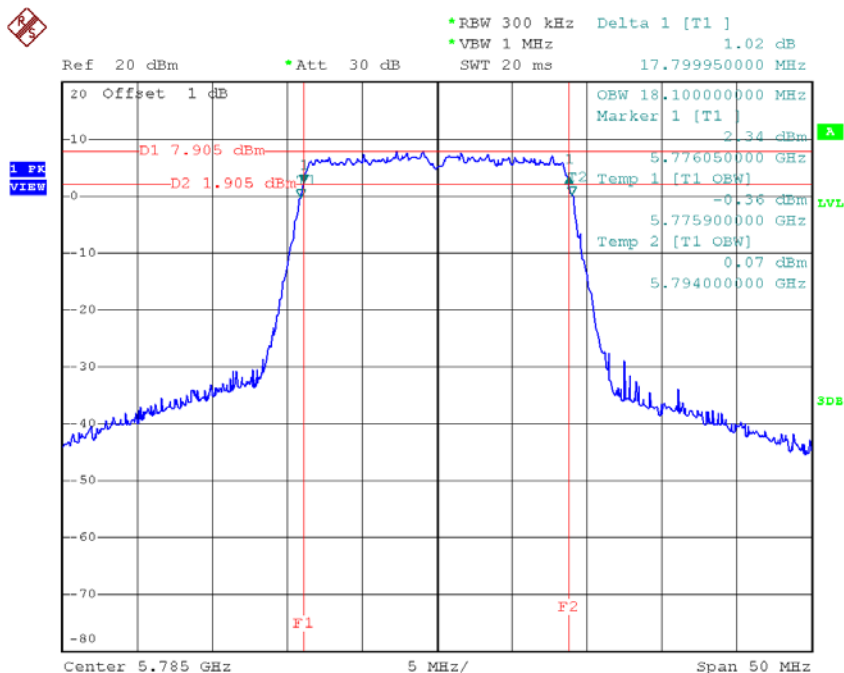

Date: 5.JUL.2015 18:18:42

TX CH 165

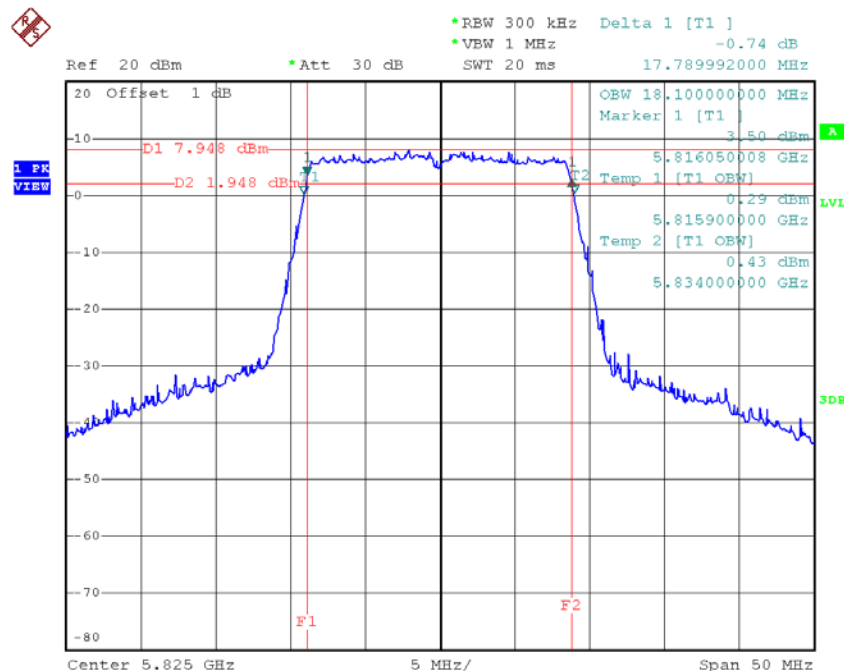


Date: 5.JUL.2015 18:19:27

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

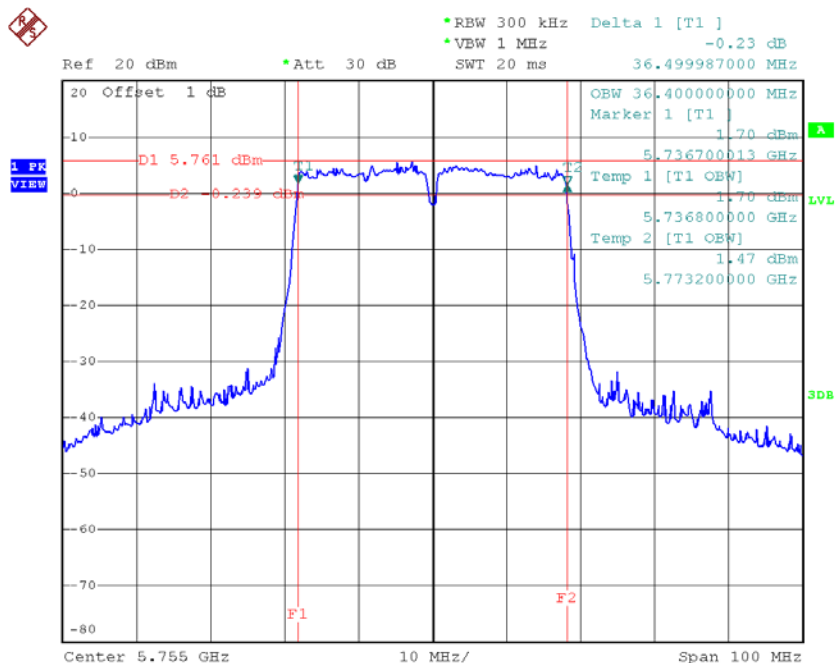

Date: 5.JUL.2015 20:35:42

TX CH 159

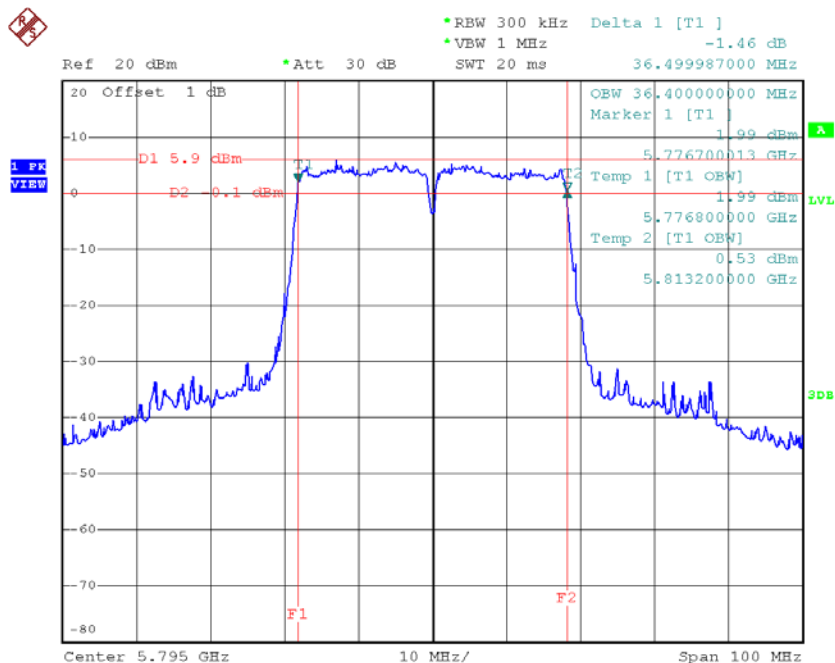


Date: 5.JUL.2015 20:36:44

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.00	18.00
CH40	5200	20.85	18.10
CH48	5240	20.90	18.10

TX CH36

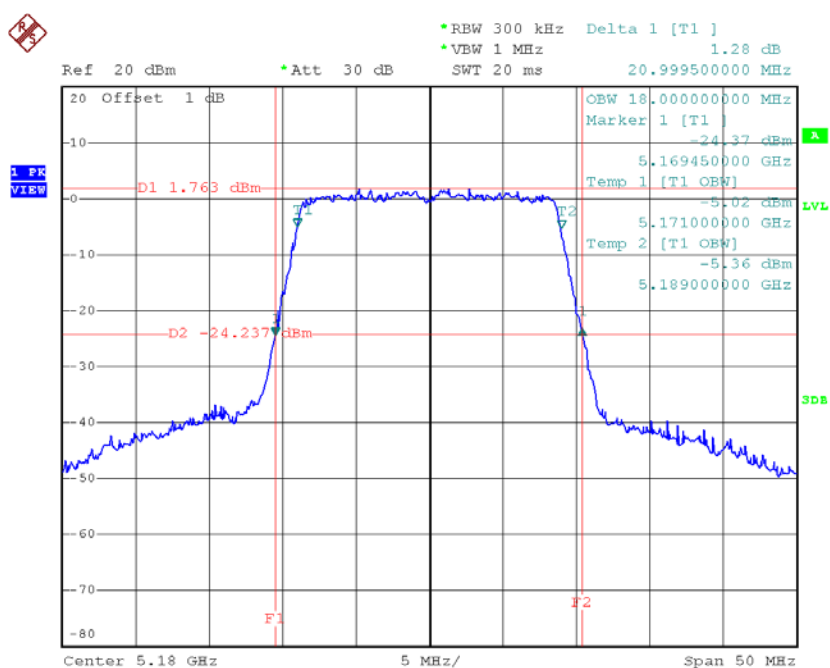


Date: 5.JUL.2015 19:30:06

TX CH40

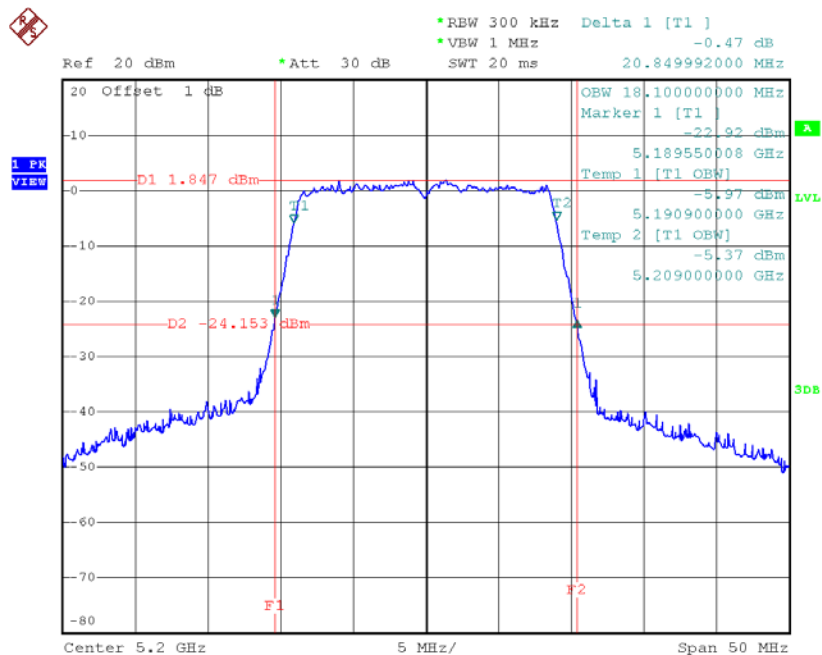

Date: 5.JUL.2015 19:31:01

TX CH48

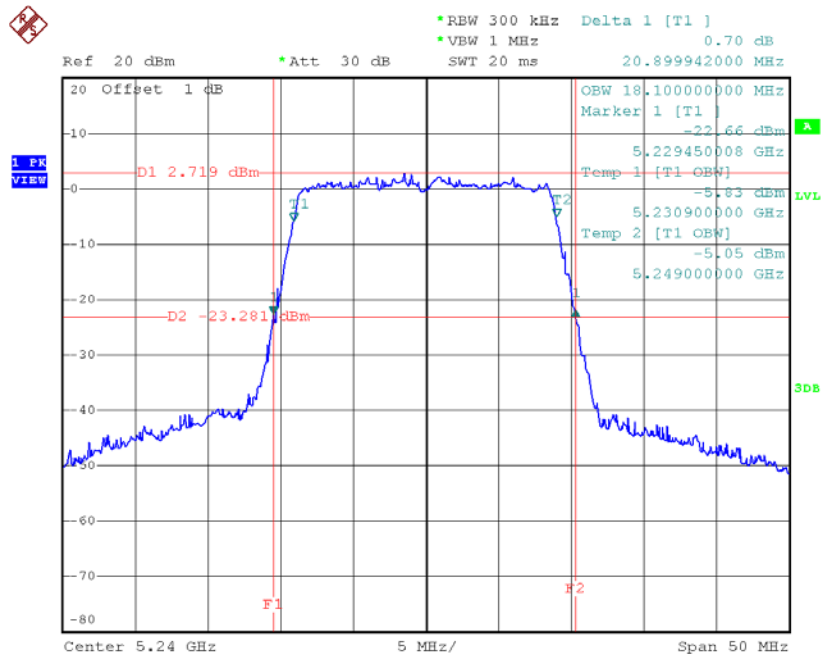


Date: 5.JUL.2015 19:31:43

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.70	36.40
CH46	5230	39.80	36.40

TX CH38

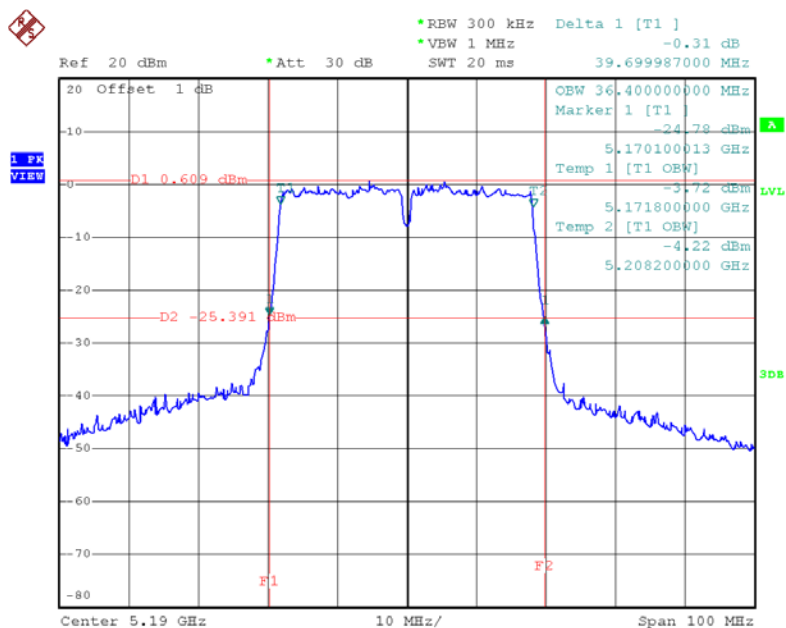

Date: 5.JUL.2015 21:38:24

TX CH46

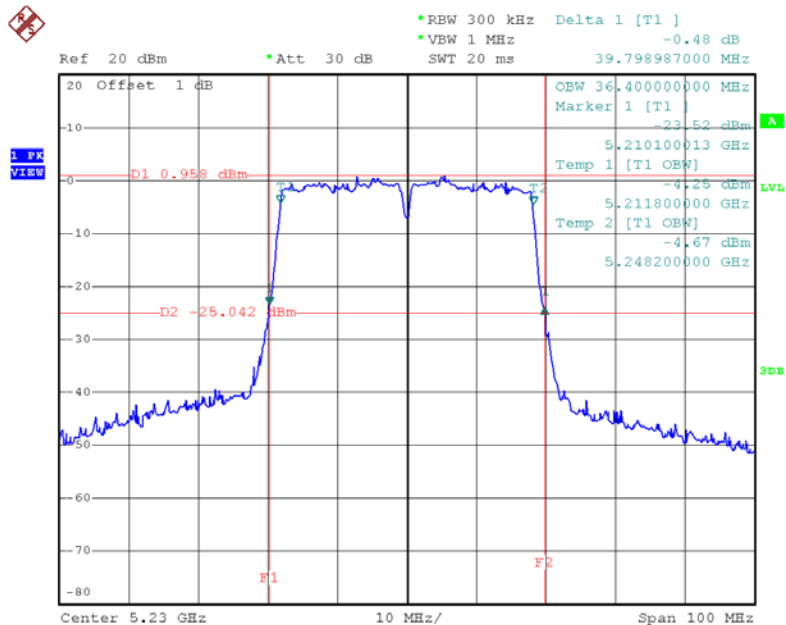


Date: 5.JUL.2015 21:39:26

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	81.20	76.00

TX CH42

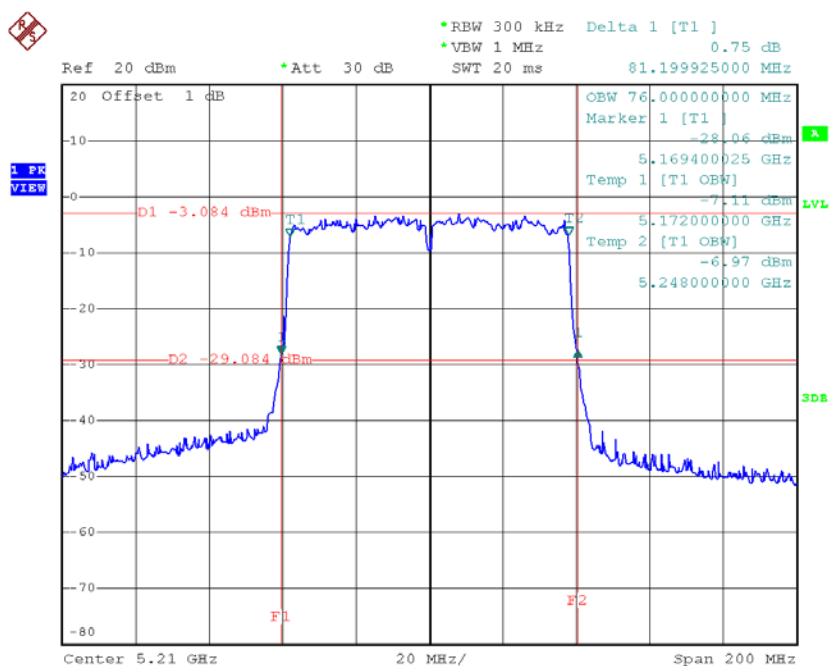


Date: 5.JUL.2015 22:35:24

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.95	18.10
CH60	5300	21.15	18.10
CH64	5320	20.85	18.20

TX CH52

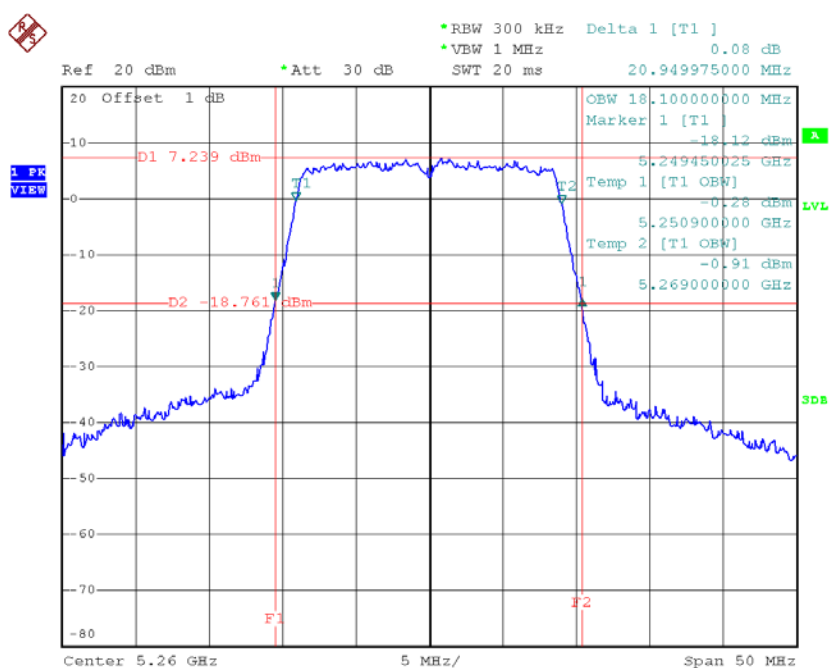


Date: 5.JUL.2015 19:32:33

TX CH60

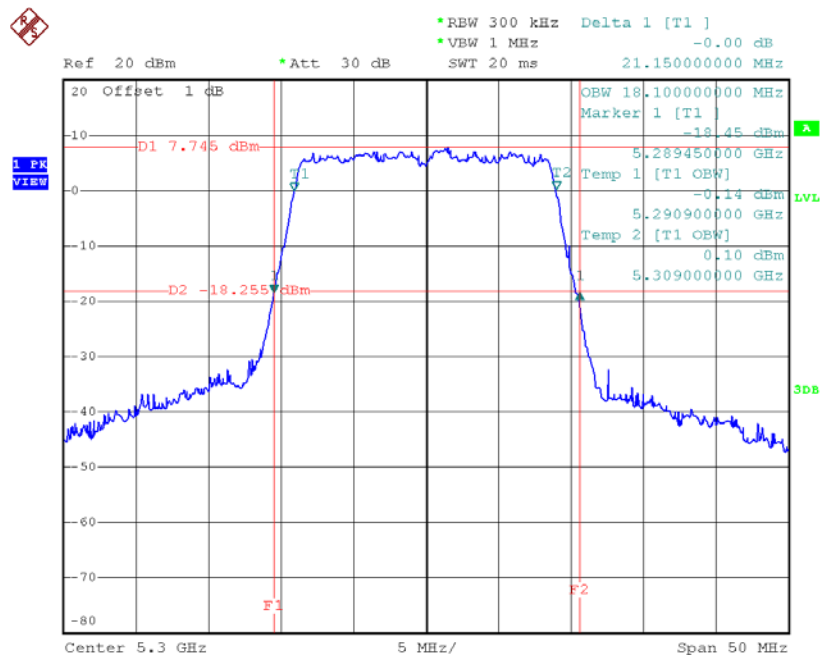

Date: 5.JUL.2015 19:33:29

TX CH64

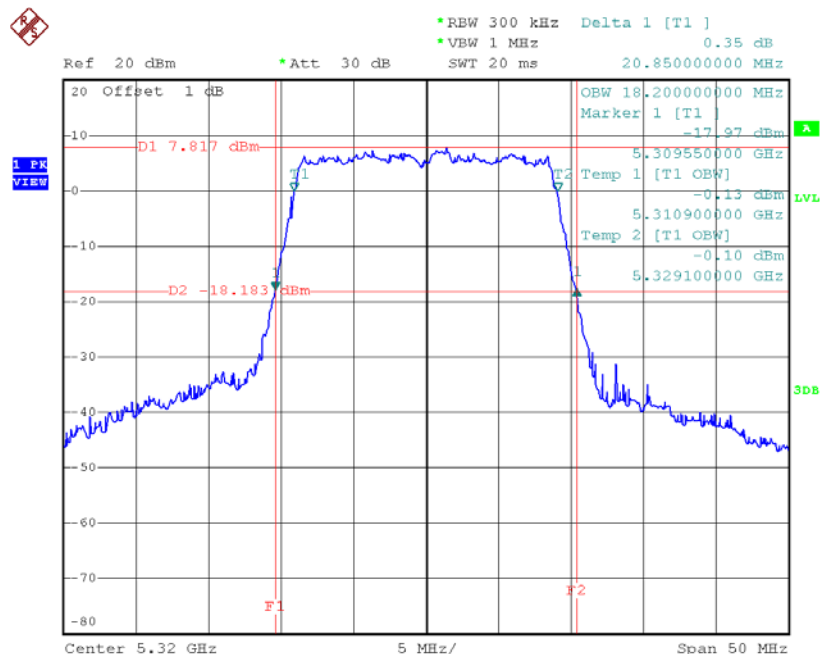


Date: 5.JUL.2015 19:34:12

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.00	36.40
CH62	5310	39.70	36.40

TX CH54

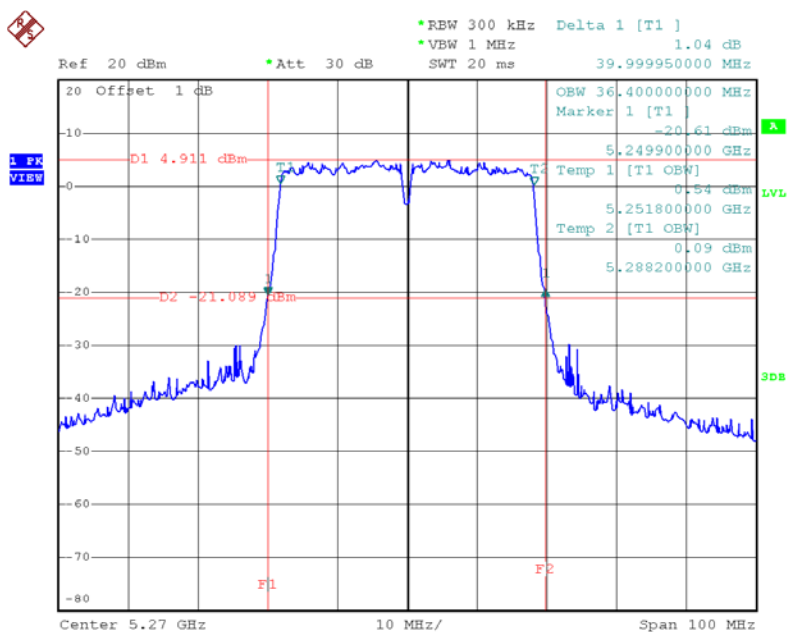

Date: 5.JUL.2015 21:40:23

TX CH62

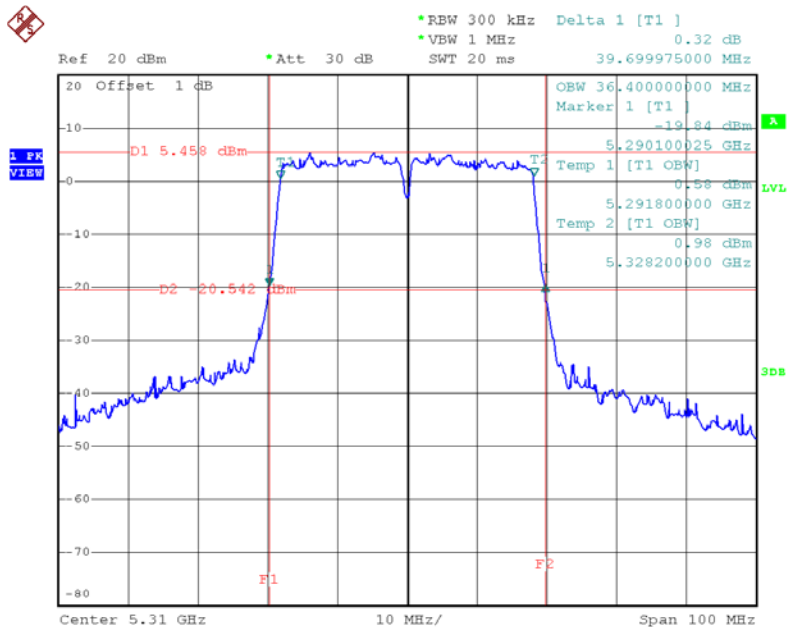


Date: 5.JUL.2015 21:41:21

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	81.60	76.00

TX CH58

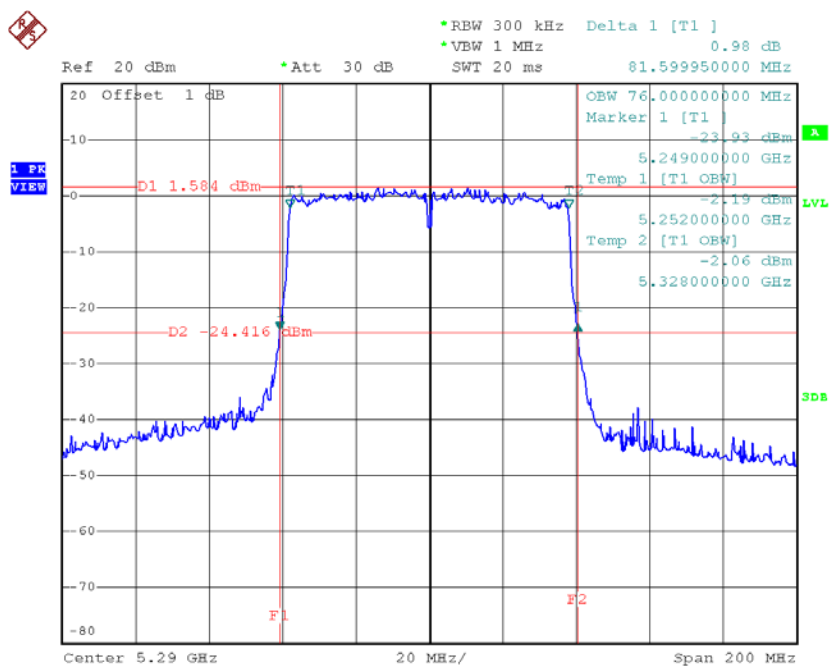


Date: 5.JUL.2015 22:36:35

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.75	17.90
CH116	5580	20.90	18.00
CH140	5700	21.05	18.10

TX CH100

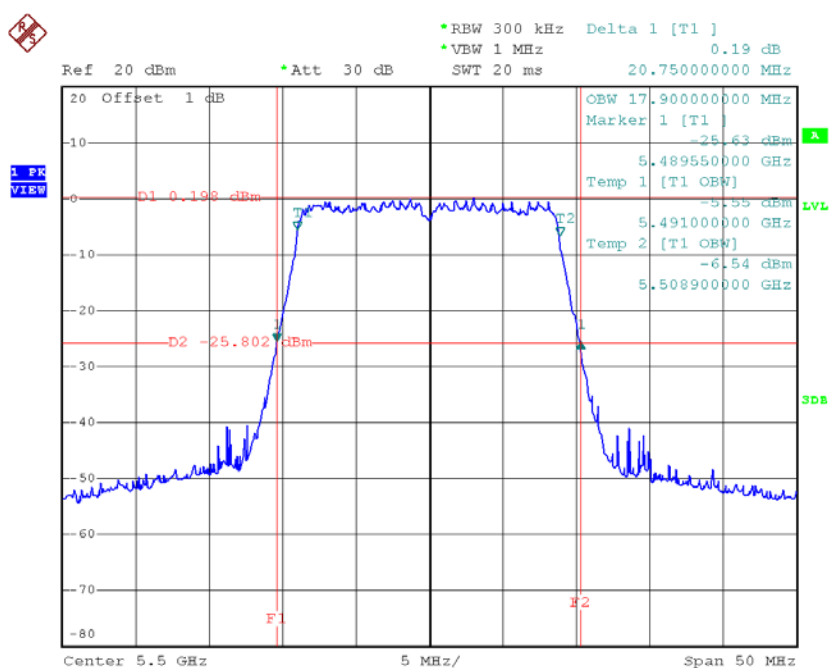


Date: 16.AUG.2015 14:07:23

TX CH116

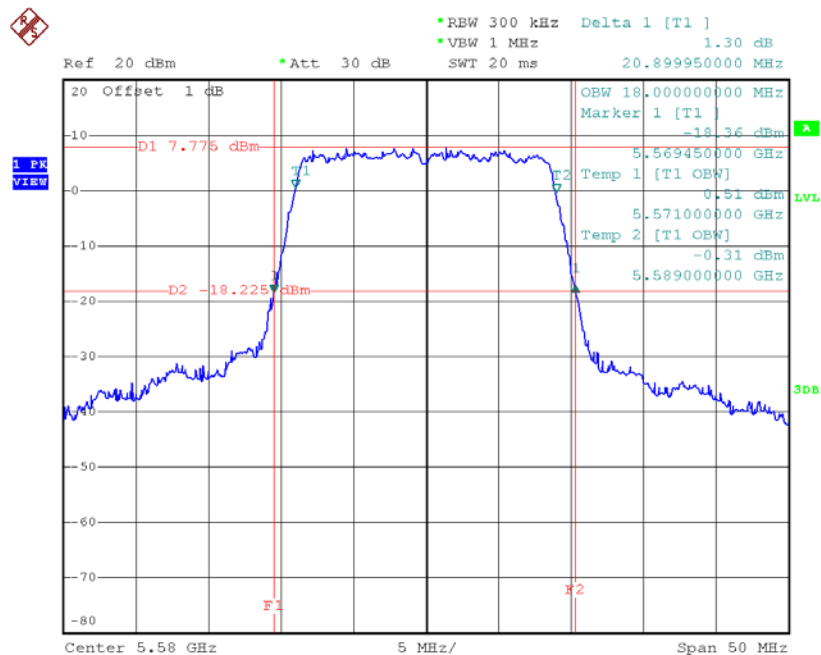

Date: 5.JUL.2015 19:35:49

TX CH140

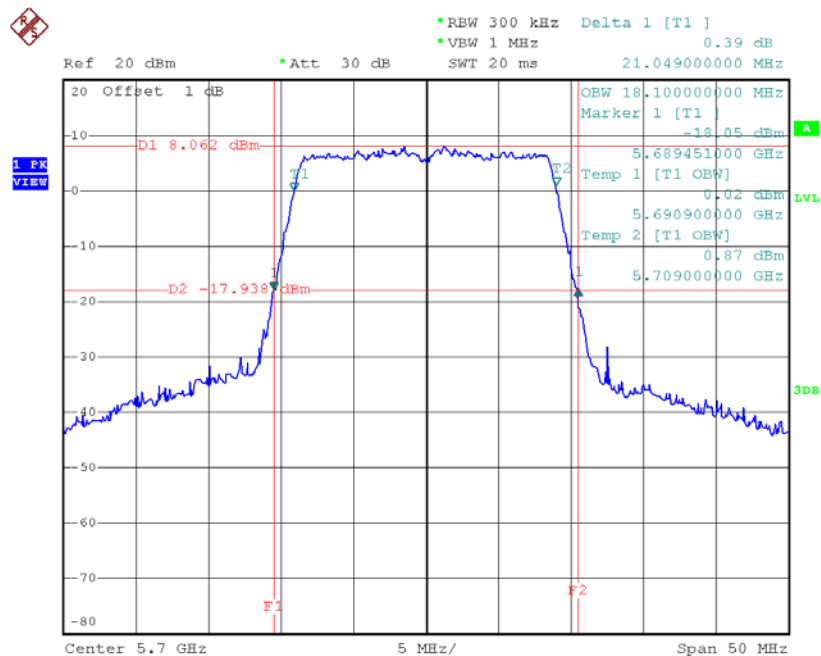


Date: 5.JUL.2015 19:36:30

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.20	36.40
CH110	5550	39.70	36.40
CH134	5670	39.90	36.40

TX CH102

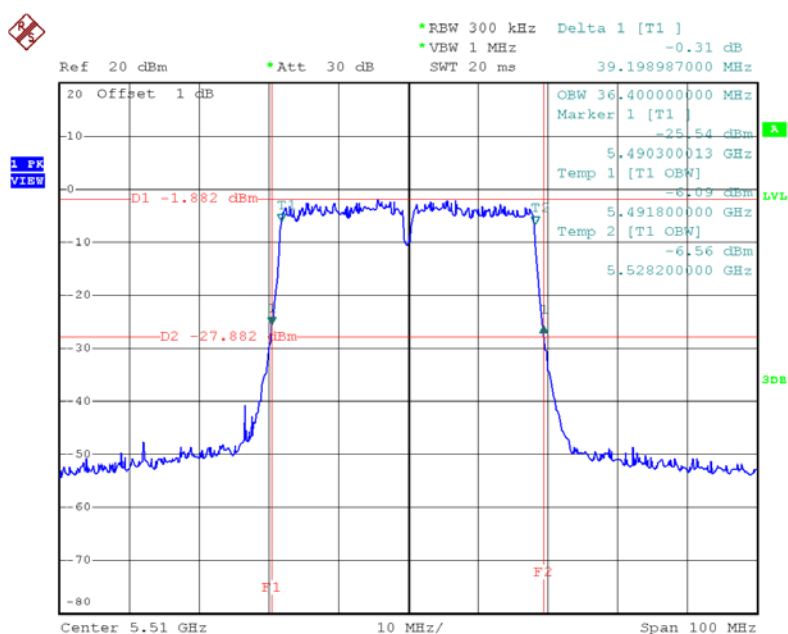


Date: 16.AUG.2015 14:32:05

TX CH110

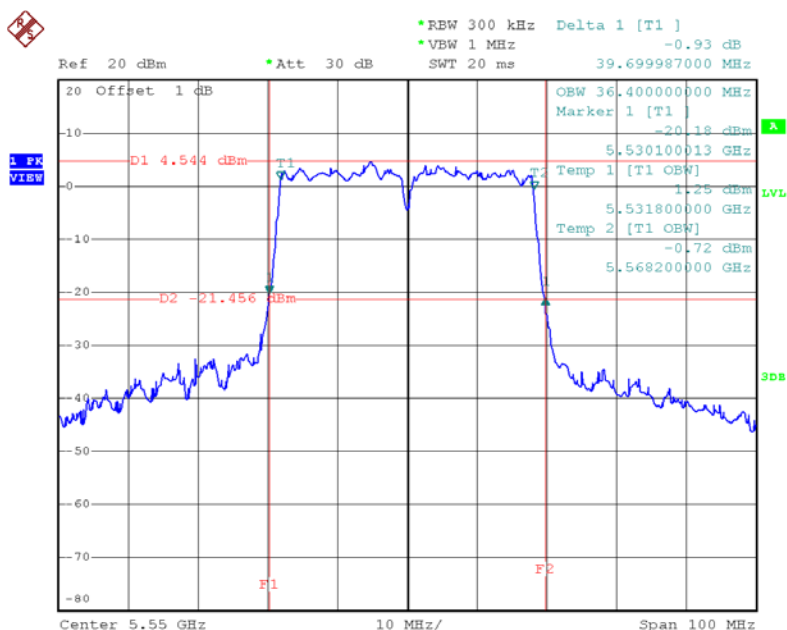

Date: 5.JUL.2015 21:43:20

TX CH134

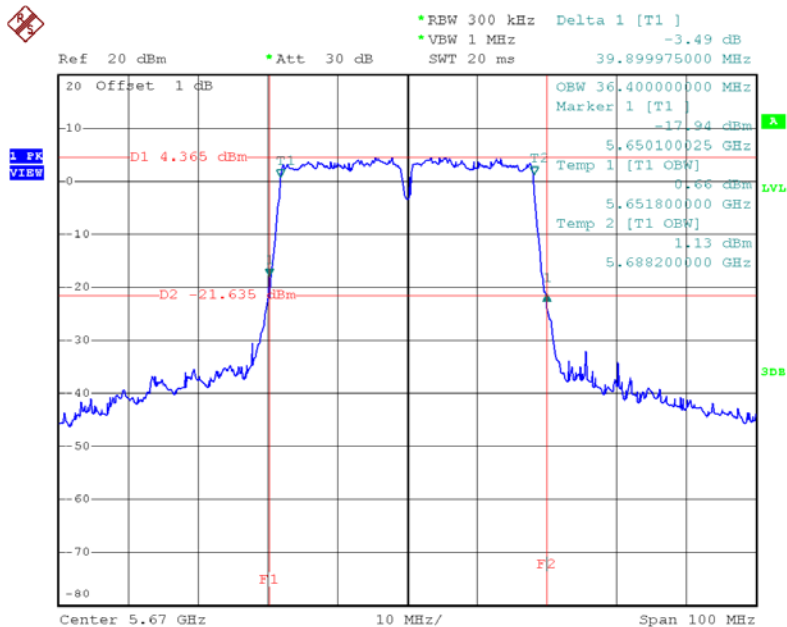


Date: 5.JUL.2015 21:44:10

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	80.60	76.00
CH122	5610	81.19	76.00

TX CH106

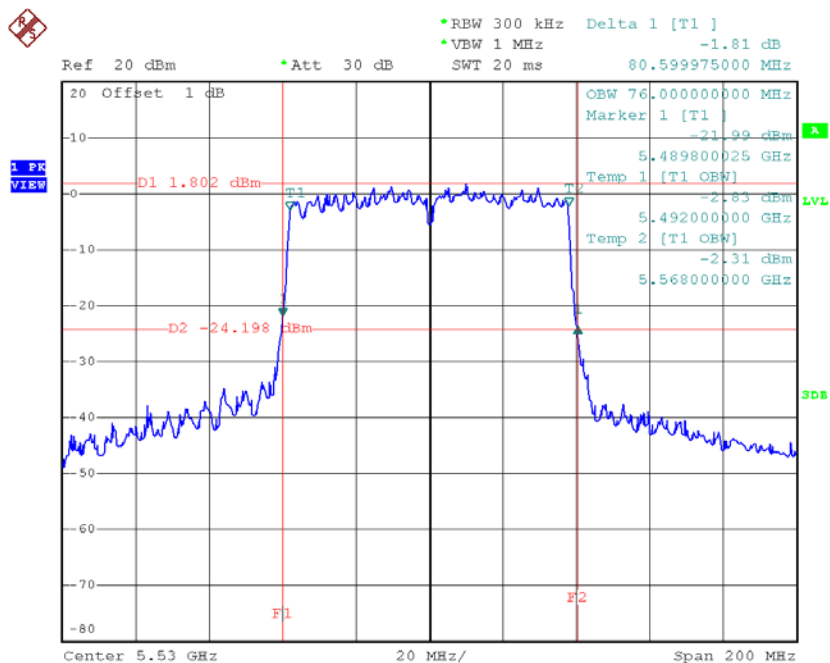

Date: 5.JUL.2015 22:37:51

TX CH122

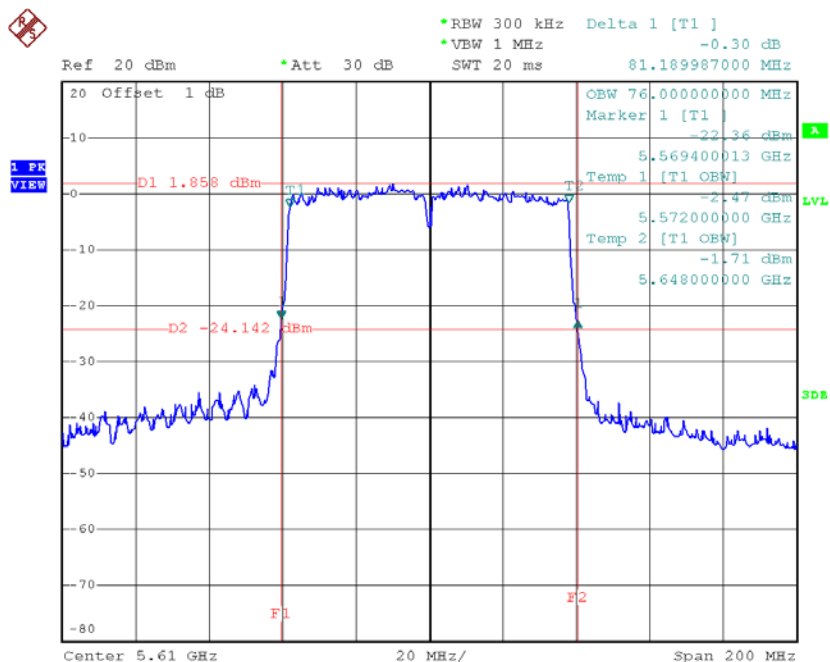


Date: 5.JUL.2015 22:38:59

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.79	18.10	>=500
CH157	5785	17.85	18.10	>=500
CH165	5825	17.86	18.10	>=500

TX CH 149

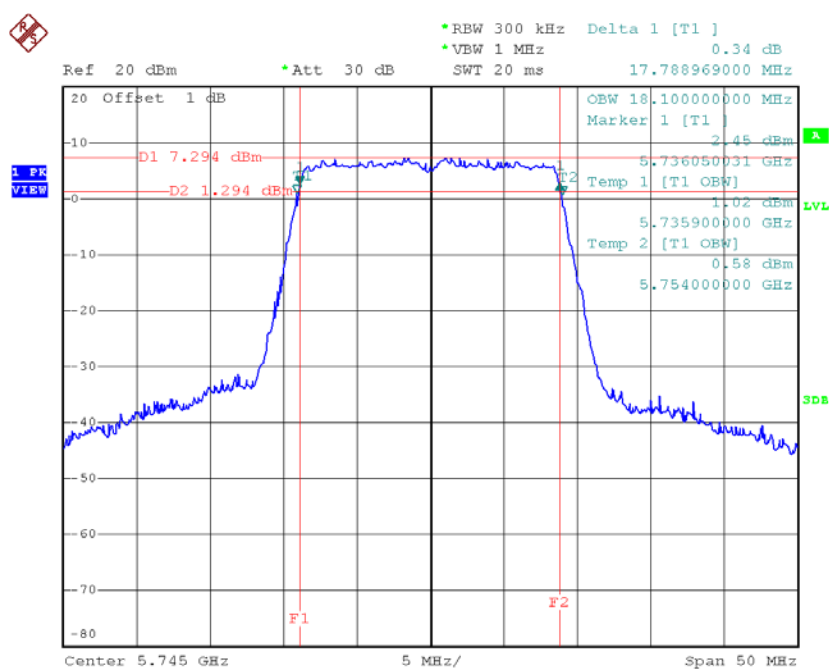


Date: 5.JUL.2015 19:37:24

TX CH 157

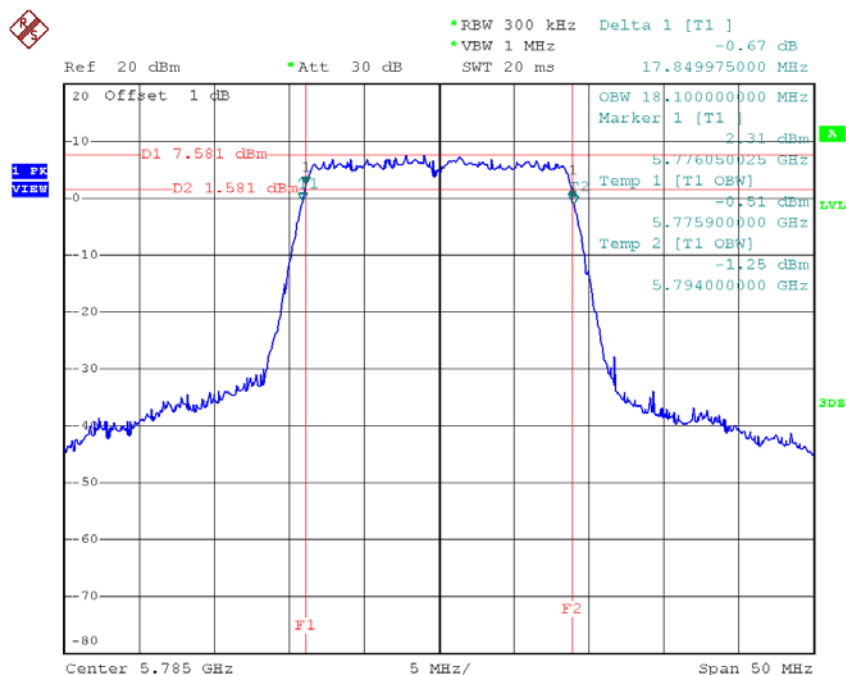

Date: 5.JUL.2015 19:38:16

TX CH 165

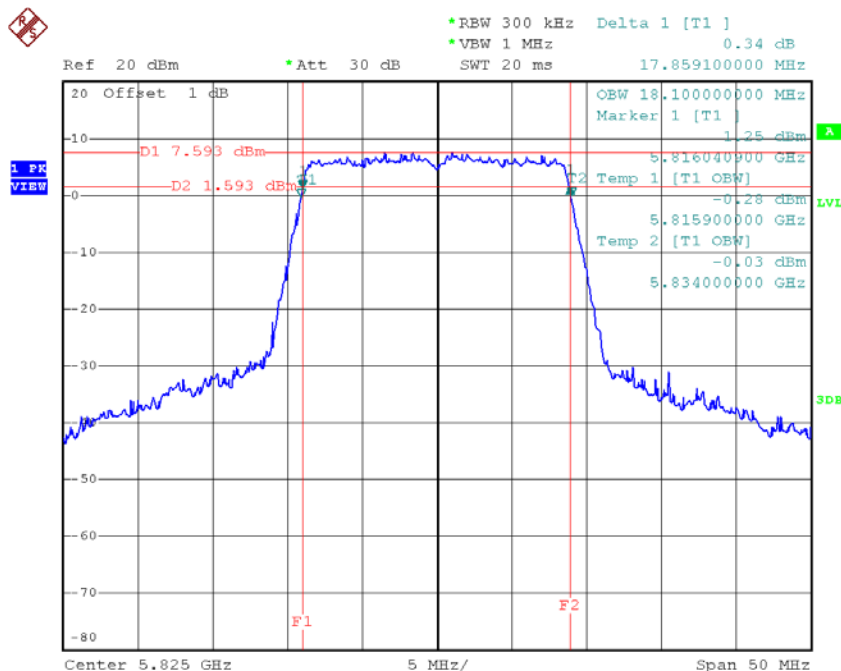


Date: 5.JUL.2015 19:38:59

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

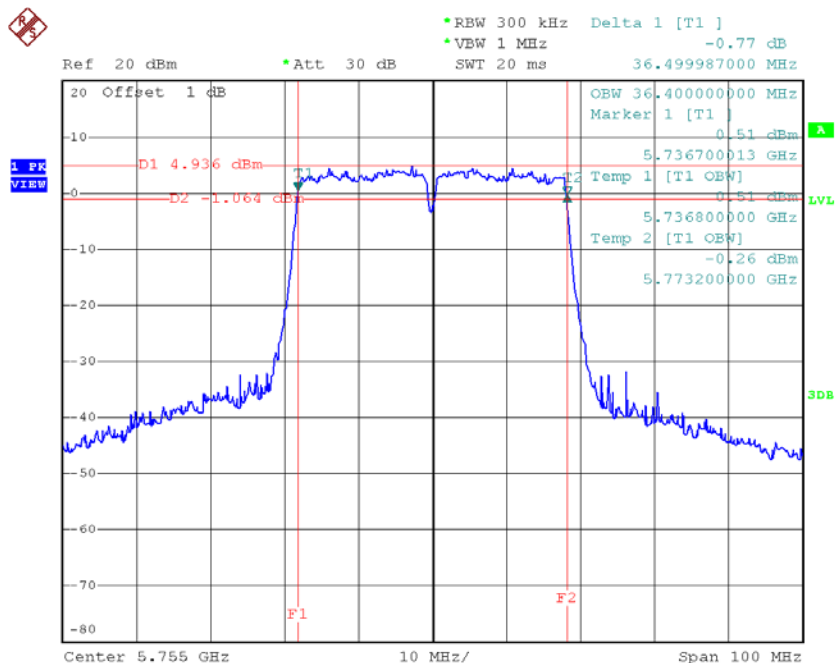

Date: 5.JUL.2015 21:45:12

TX CH 159

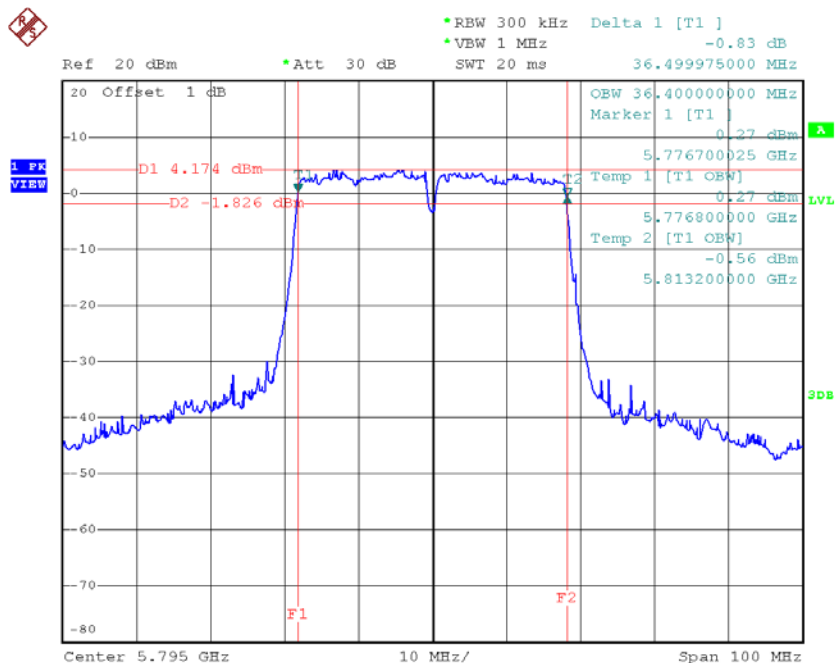


Date: 5.JUL.2015 21:46:15

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.39	76.00	>=500

TX CH 155

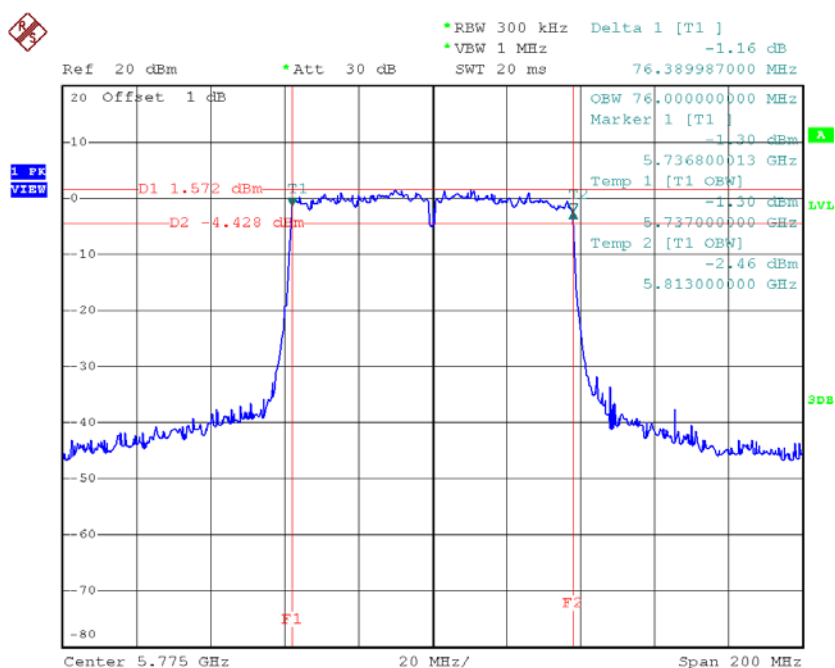

Date: 5.JUL.2015 22:40:07

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	9.64	0.12	9.76	30.00	1.00
CH40	5200	9.79	0.12	9.91	30.00	1.00
CH48	5240	9.97	0.12	10.09	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	9.98	0.47	10.45	30.00	1.00
CH40	5200	9.95	0.47	10.42	30.00	1.00
CH48	5240	9.97	0.47	10.44	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	7.98	0.47	8.45	30.00	1.00
CH40	5200	8.09	0.47	8.56	30.00	1.00
CH48	5240	8.23	0.47	8.70	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.87	0.47	9.34	30.00	1.00
CH40	5200	8.71	0.47	9.18	30.00	1.00
CH48	5240	8.57	0.47	9.04	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.26	30.00	1.00
CH40	5200	14.23	30.00	1.00
CH48	5240	14.23	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	10.81	0.83	11.64	30.00	1.00
CH46	5230	10.72	0.83	11.55	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.37	0.83	9.20	30.00	1.00
CH46	5230	8.73	0.83	9.56	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.91	0.83	9.74	30.00	1.00
CH46	5230	8.94	0.83	9.77	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.10	30.00	1.00
CH46	5230	15.16	30.00	1.00

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.77	0.12	14.89	24.00	0.25
CH60	5300	14.95	0.12	15.07	24.00	0.25
CH64	5320	14.93	0.12	15.05	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.95	0.47	15.42	24.00	0.25
CH60	5300	14.13	0.47	14.60	24.00	0.25
CH64	5320	13.76	0.47	14.23	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	13.86	0.47	14.33	24.00	0.25
CH60	5300	14.21	0.47	14.68	24.00	0.25
CH64	5320	14.86	0.47	15.33	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.63	0.47	15.10	24.00	0.25
CH60	5300	14.55	0.47	15.02	24.00	0.25
CH64	5320	14.98	0.47	15.45	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.74	24.00	0.25
CH60	5300	19.54	24.00	0.25
CH64	5320	19.81	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.64	0.83	15.47	24.00	0.25
CH62	5310	14.05	0.83	14.88	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.04	0.83	14.87	24.00	0.25
CH62	5310	14.57	0.83	15.40	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.11	0.83	14.94	24.00	0.25
CH62	5310	14.72	0.83	15.55	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	19.87	24.00	0.25
CH62	5310	20.06	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.57	0.12	14.69	24.00	0.25
CH116	5580	14.91	0.12	15.03	24.00	0.25
CH140	5700	14.94	0.12	15.06	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.66	0.47	12.13	24.00	0.25
CH116	5580	12.67	0.47	13.14	24.00	0.25
CH140	5700	14.76	0.47	15.23	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.97	0.47	15.44	24.00	0.25
CH116	5580	14.96	0.47	15.43	24.00	0.25
CH140	5700	12.85	0.47	13.32	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.24	0.47	13.71	24.00	0.25
CH116	5580	13.82	0.47	14.29	24.00	0.25
CH140	5700	13.71	0.47	14.18	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.74	24.00	0.25
CH116	5580	19.16	24.00	0.25
CH140	5700	19.08	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.17	0.83	13.00	24.00	0.25
CH110	5550	12.34	0.83	13.17	24.00	0.25
CH134	5670	14.68	0.83	15.51	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.95	0.83	15.78	24.00	0.25
CH110	5550	14.68	0.83	15.51	24.00	0.25
CH134	5670	12.52	0.83	13.35	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.92	0.83	14.75	24.00	0.25
CH110	5550	13.58	0.83	14.41	24.00	0.25
CH134	5670	13.28	0.83	14.11	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	19.43	24.00	0.25
CH110	5550	19.24	24.00	0.25
CH134	5670	19.19	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.83	0.12	14.95	30.00	1.00
CH157	5785	14.61	0.12	14.73	30.00	1.00
CH165	5825	14.58	0.12	14.70	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.92	0.47	15.39	30.00	1.00
CH157	5785	14.89	0.47	15.36	30.00	1.00
CH165	5825	14.88	0.47	15.35	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.87	0.47	13.34	30.00	1.00
CH157	5785	12.02	0.47	12.49	30.00	1.00
CH165	5825	12.45	0.47	12.92	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.71	0.47	14.18	30.00	1.00
CH157	5785	13.78	0.47	14.25	30.00	1.00
CH165	5825	13.98	0.47	14.45	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.16	30.00	1.00
CH157	5785	18.96	30.00	1.00
CH165	5825	19.12	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.81	0.83	15.64	30.00	1.00
CH159	5795	14.78	0.83	15.61	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.47	0.83	12.30	30.00	1.00
CH159	5795	11.54	0.83	12.37	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.58	0.83	14.41	30.00	1.00
CH159	5795	13.47	0.83	14.30	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	19.10	30.00	1.00
CH159	5795	19.06	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	9.92	0.11	10.03	30.00	1.00
CH40	5200	9.95	0.11	10.06	30.00	1.00
CH48	5240	9.86	0.11	9.97	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.98	0.11	9.09	30.00	1.00
CH40	5200	8.97	0.11	9.08	30.00	1.00
CH48	5240	9.07	0.11	9.18	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	9.27	0.11	9.38	30.00	1.00
CH40	5200	9.32	0.11	9.43	30.00	1.00
CH48	5240	9.41	0.11	9.52	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.29	30.00	1.00
CH40	5200	14.31	30.00	1.00
CH48	5240	14.34	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	10.94	0.29	11.23	30.00	1.00
CH46	5230	10.91	0.29	11.20	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.61	0.29	9.90	30.00	1.00
CH46	5230	10.01	0.29	10.30	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	10.13	0.29	10.42	30.00	1.00
CH46	5230	10.11	0.29	10.40	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.32	30.00	1.00
CH46	5230	15.42	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	10.64	0.62	11.26	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	8.36	0.62	8.98	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.12	0.62	9.74	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.87	30.00	1.00

Test Mode: UNII-2A/TX AC20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.95	0.11	15.06	24.00	0.25
CH60	5300	14.45	0.11	14.56	24.00	0.25
CH64	5320	14.07	0.11	14.18	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.44	0.11	14.55	24.00	0.25
CH60	5300	14.41	0.11	14.52	24.00	0.25
CH64	5320	14.48	0.11	14.59	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.81	0.11	14.92	24.00	0.25
CH60	5300	14.91	0.11	15.02	24.00	0.25
CH64	5320	14.89	0.11	15.00	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.62	24.00	0.25
CH60	5300	19.48	24.00	0.25
CH64	5320	19.37	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.69	0.29	14.98	24.00	0.25
CH62	5310	14.13	0.29	14.42	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.31	0.29	14.60	24.00	0.25
CH62	5310	14.22	0.29	14.51	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.81	0.29	15.10	24.00	0.25
CH62	5310	14.61	0.29	14.90	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	19.67	24.00	0.25
CH62	5310	19.39	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.56	0.62	15.18	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.65	0.62	15.27	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.72	0.62	15.34	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	20.04	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.36	0.11	11.47	24.00	0.25
CH116	5580	13.06	0.11	13.17	24.00	0.25
CH140	5700	14.66	0.11	14.77	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.56	0.11	14.67	24.00	0.25
CH116	5580	14.42	0.11	14.53	24.00	0.25
CH140	5700	12.81	0.11	12.92	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.81	0.11	12.92	24.00	0.25
CH116	5580	13.74	0.11	13.85	24.00	0.25
CH140	5700	14.08	0.11	14.19	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.99	24.00	0.25
CH116	5580	18.66	24.00	0.25
CH140	5700	18.80	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.97	0.29	12.26	24.00	0.25
CH110	5550	12.76	0.29	13.05	24.00	0.25
CH134	5670	14.52	0.29	14.81	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.92	0.29	15.21	24.00	0.25
CH110	5550	14.92	0.29	15.21	24.00	0.25
CH134	5670	12.89	0.29	13.18	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.53	0.29	13.82	24.00	0.25
CH110	5550	14.01	0.29	14.30	24.00	0.25
CH134	5670	13.58	0.29	13.87	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	18.70	24.00	0.25
CH110	5550	19.05	24.00	0.25
CH134	5670	18.78	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.83	0.62	13.45	24.00	0.25
CH122	5610	14.56	0.62	15.18	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	14.73	0.62	15.35	24.00	0.25
CH122	5610	13.38	0.62	14.00	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.73	0.62	14.35	24.00	0.25
CH122	5610	13.44	0.62	14.06	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	19.22	24.00	0.25
CH122	5610	19.22	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.82	0.11	14.93	30.00	1.00
CH157	5785	14.77	0.11	14.88	30.00	1.00
CH165	5825	14.86	0.11	14.97	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.29	0.11	11.40	30.00	1.00
CH157	5785	10.64	0.11	10.75	30.00	1.00
CH165	5825	11.13	0.11	11.24	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.51	0.11	13.62	30.00	1.00
CH157	5785	12.93	0.11	13.04	30.00	1.00
CH165	5825	13.22	0.11	13.33	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.32	30.00	1.00
CH157	5785	17.98	30.00	1.00
CH165	5825	18.21	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.79	0.29	15.08	30.00	1.00
CH159	5795	14.59	0.29	14.88	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	10.77	0.29	11.06	30.00	1.00
CH159	5795	10.38	0.29	10.67	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.05	0.29	13.34	30.00	1.00
CH159	5795	12.58	0.29	12.87	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	18.23	30.00	1.00
CH159	5795	17.91	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	14.92	0.62	15.54	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 5

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.82	0.62	12.44	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 6

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	13.13	0.62	13.75	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	18.87	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-1/TX A Mode

TX mode CH36

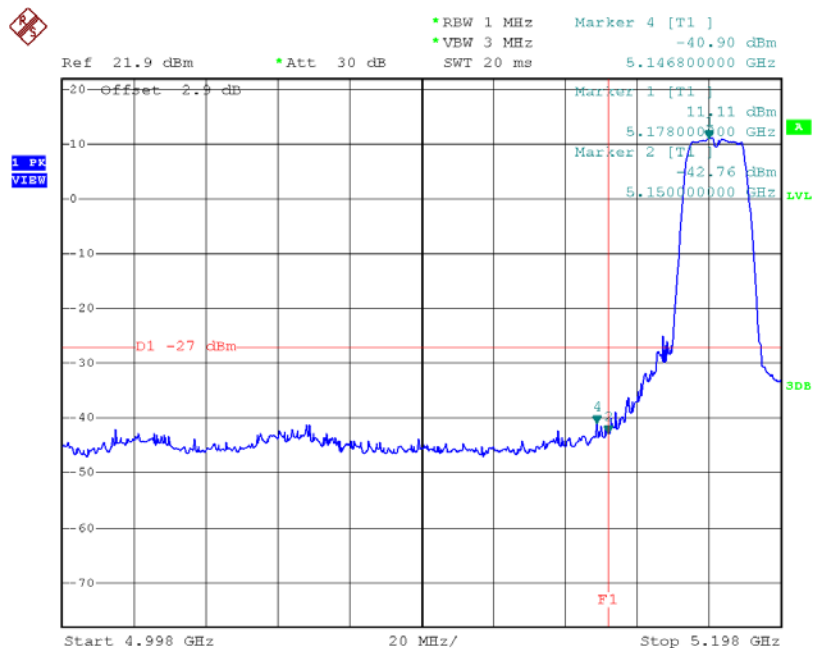

Date: 5.JUL.2015 17:52:10


TX mode CH48

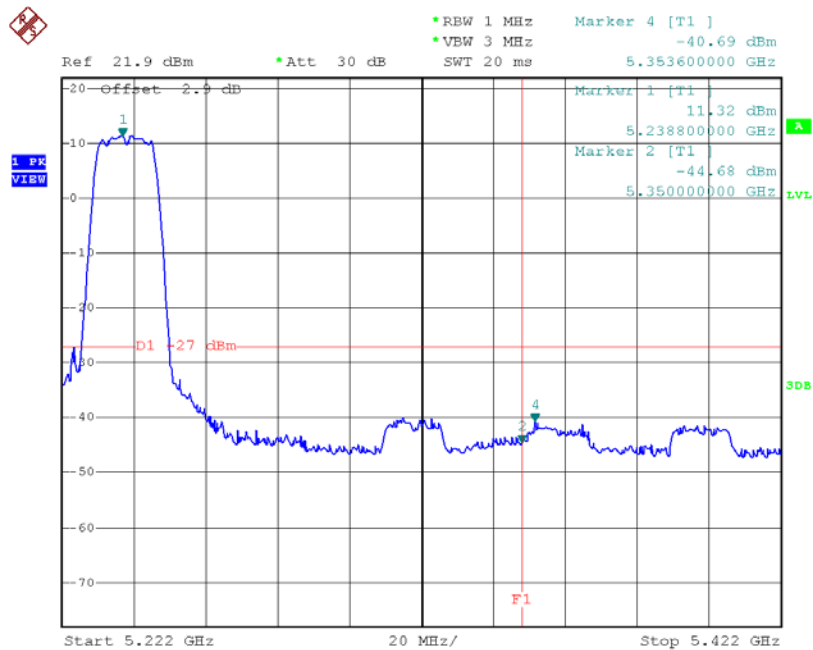

Date: 5.JUL.2015 17:55:14


Test Mode: UNII-2A/TX A Mode

TX mode CH52

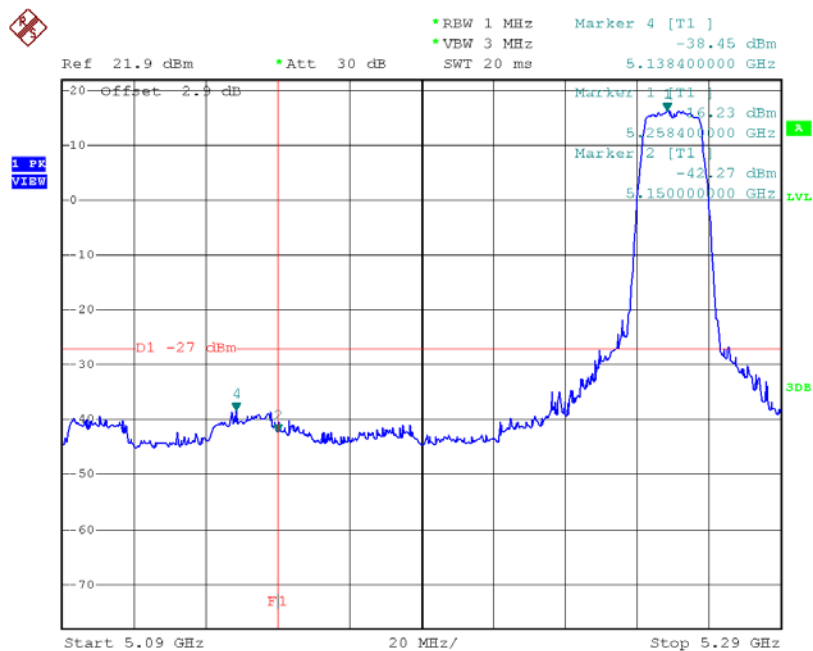

Date: 5.JUL.2015 17:56:31


TX mode CH64

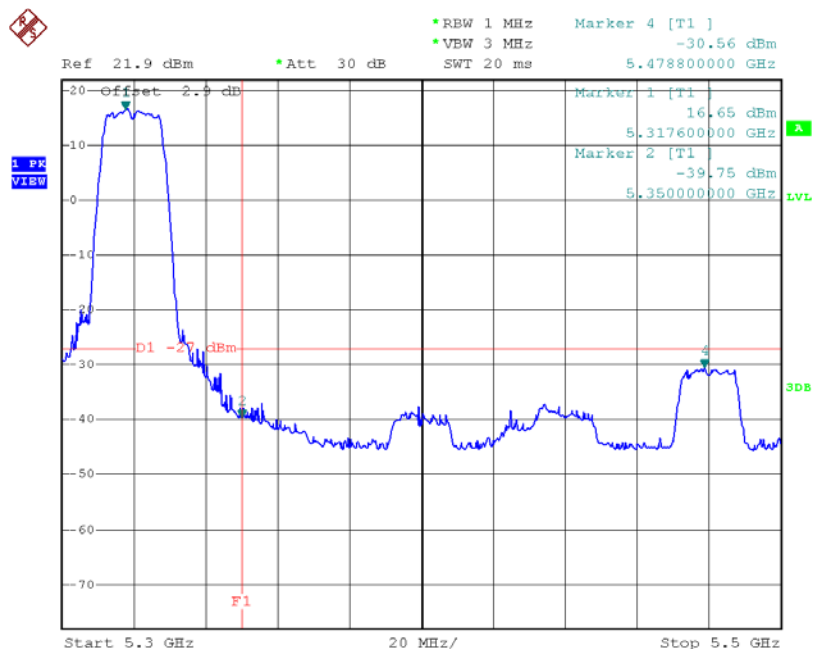

Date: 5.JUL.2015 17:59:04


Test Mode: UNII-2C/TX A Mode

TX mode CH100

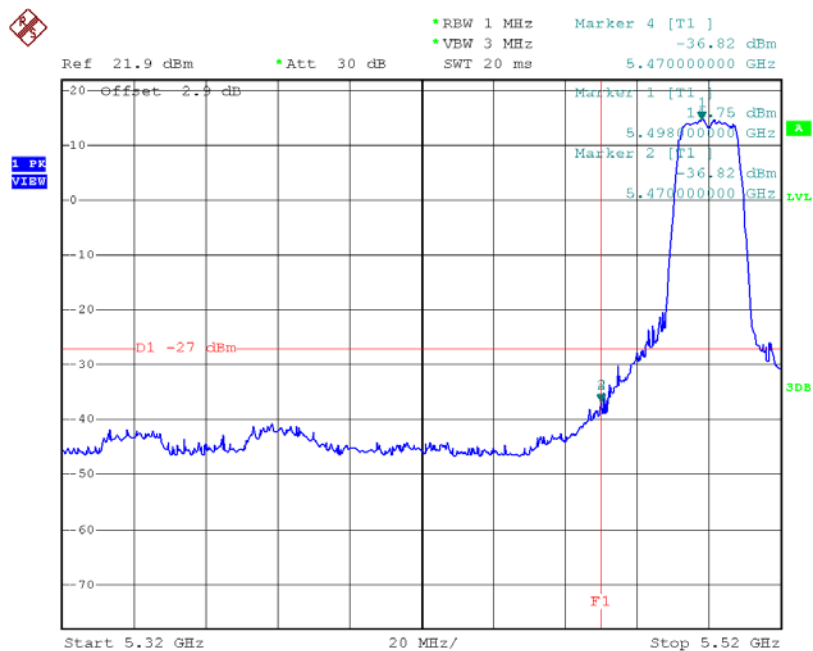

Date: 5.JUL.2015 18:00:39


TX mode CH140

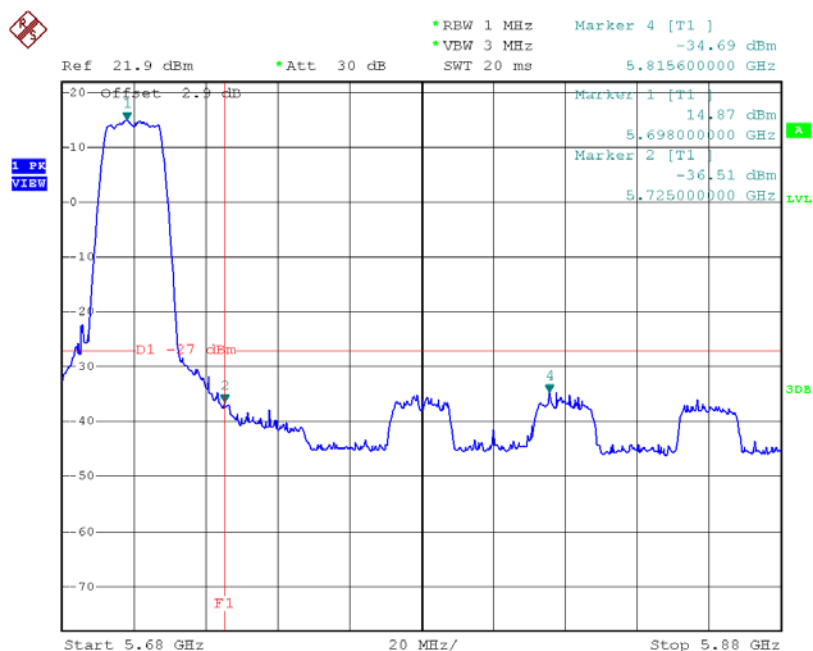

Date: 5.JUL.2015 18:03:04


Test Mode: UNII-3/TX A Mode

TX A Mode CH149

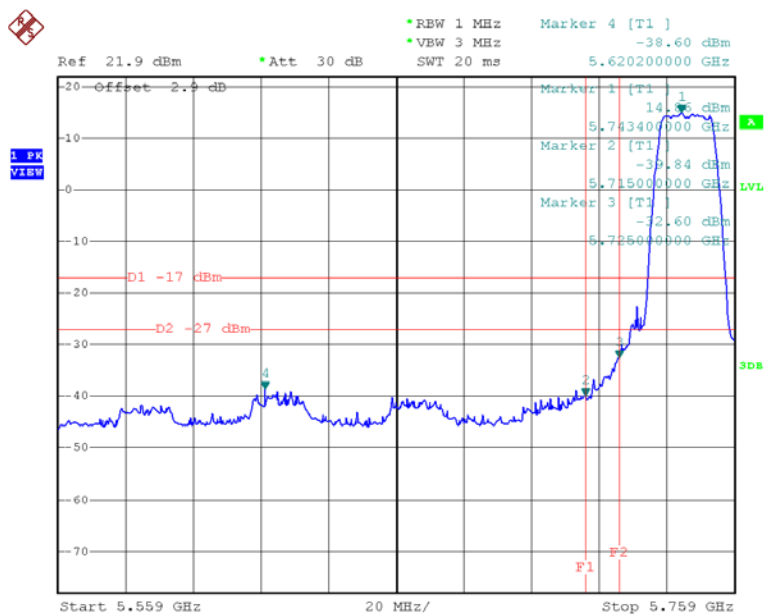

Date: 5.JUL.2015 18:03:59


TX A Mode CH165

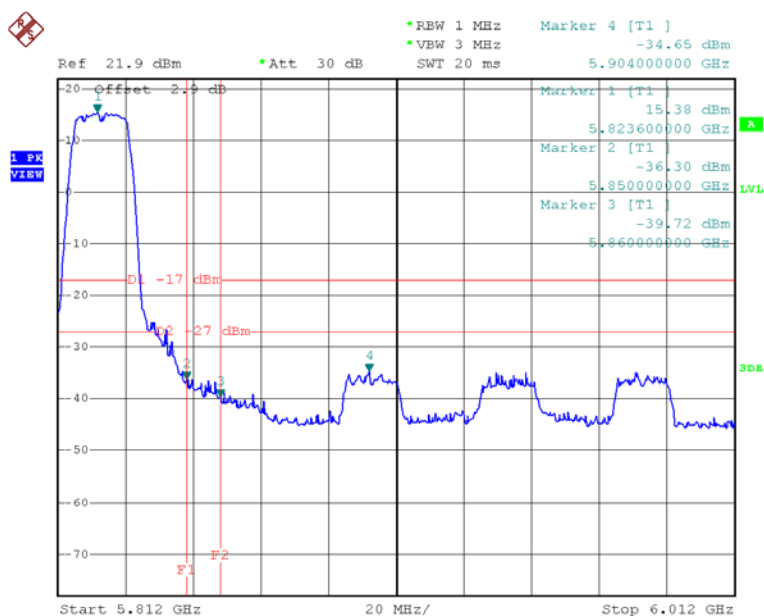

Date: 5.JUL.2015 18:06:50


Test Mode: UNII-1/TX N20 Mode_ANT 4

TX mode CH36

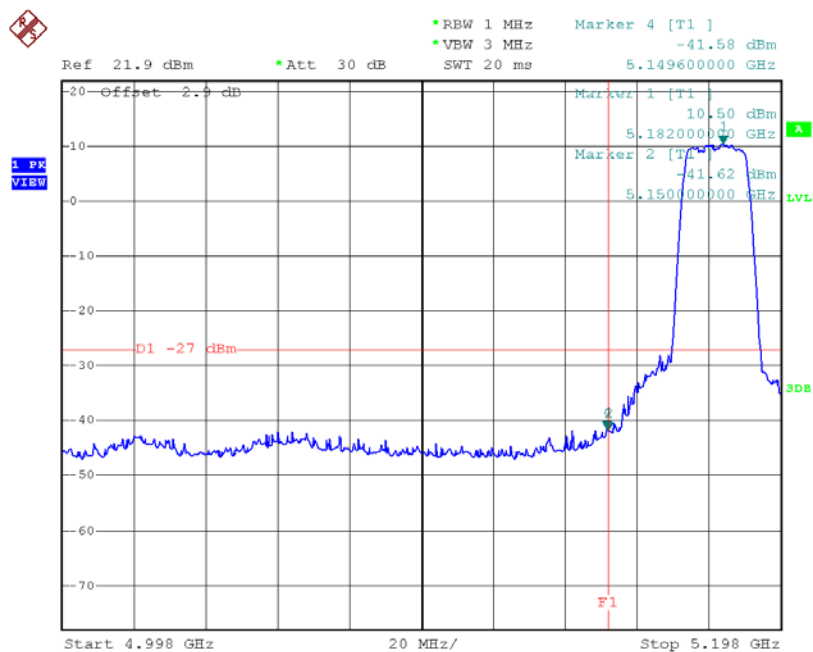

Date: 5.JUL.2015 18:09:10


TX mode CH48

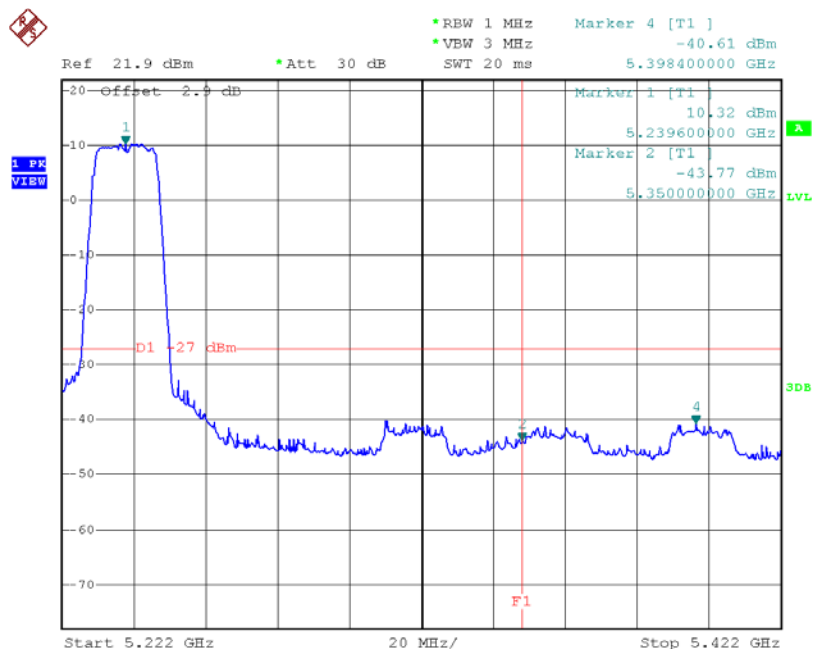

Date: 5.JUL.2015 18:10:53


Test Mode: UNII-1/TX N20 Mode_ANT 5

TX mode CH36

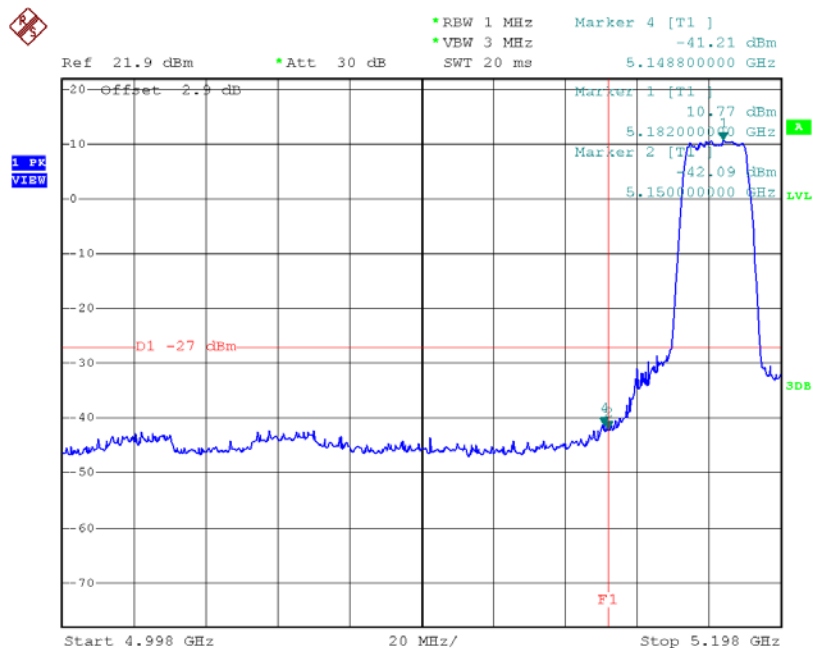

Date: 5.JUL.2015 18:21:00


TX mode CH48

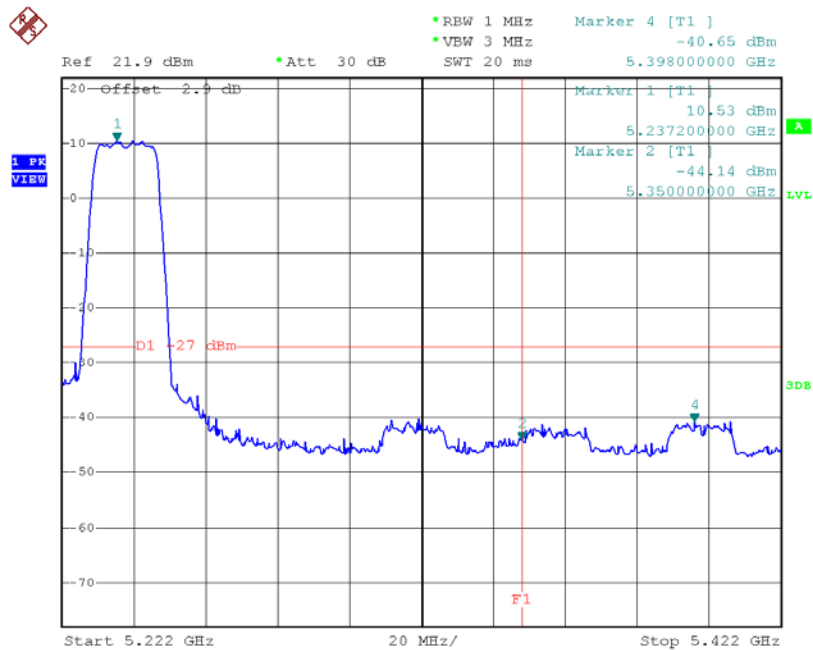

Date: 5.JUL.2015 18:23:06


Test Mode: UNII-1/TX N20 Mode_ANT 6

TX mode CH36

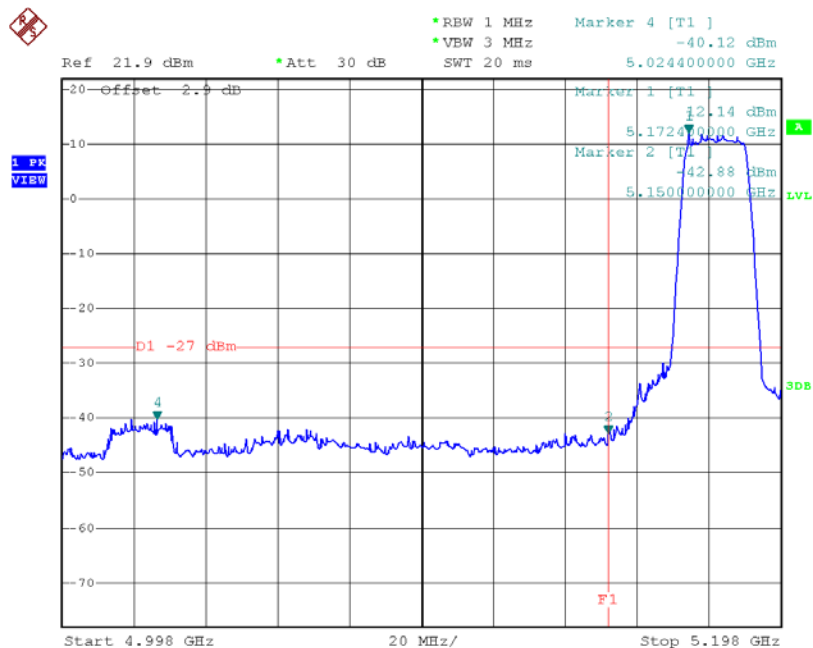

Date: 5.JUL.2015 18:49:48


TX mode CH48

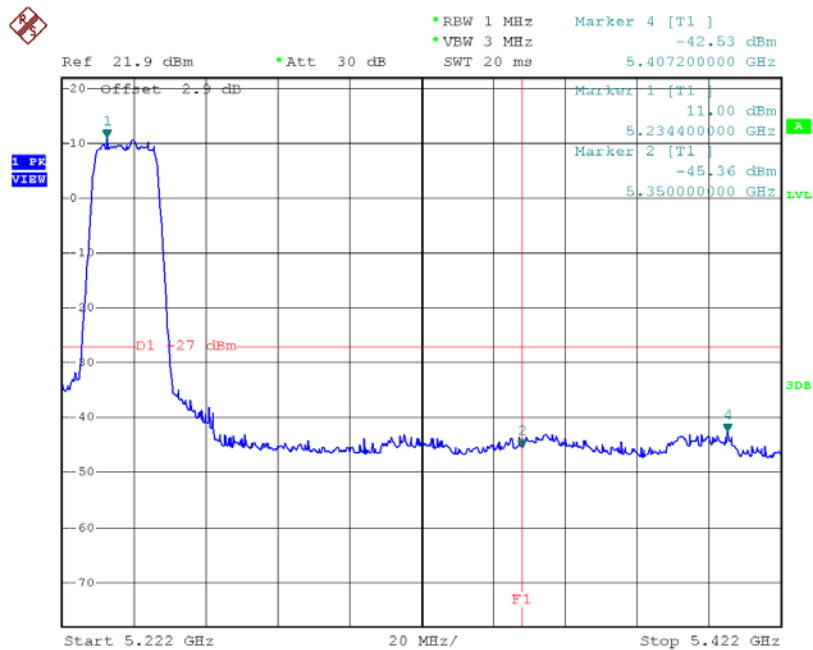

Date: 5.JUL.2015 18:51:21


Test Mode: UNII-1/TX N40 Mode_ANT 4

TX mode CH38

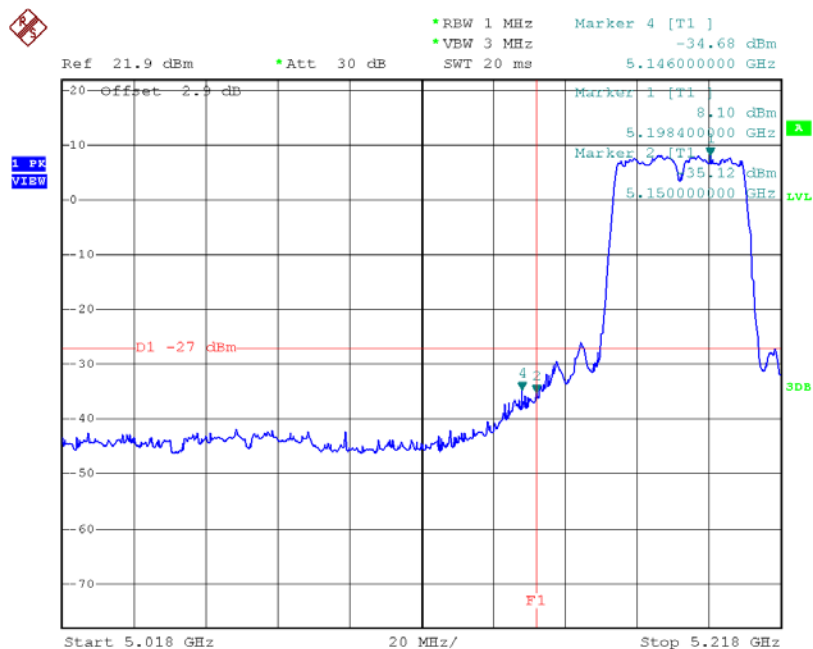

Date: 5.JUL.2015 20:28:29


TX mode CH46

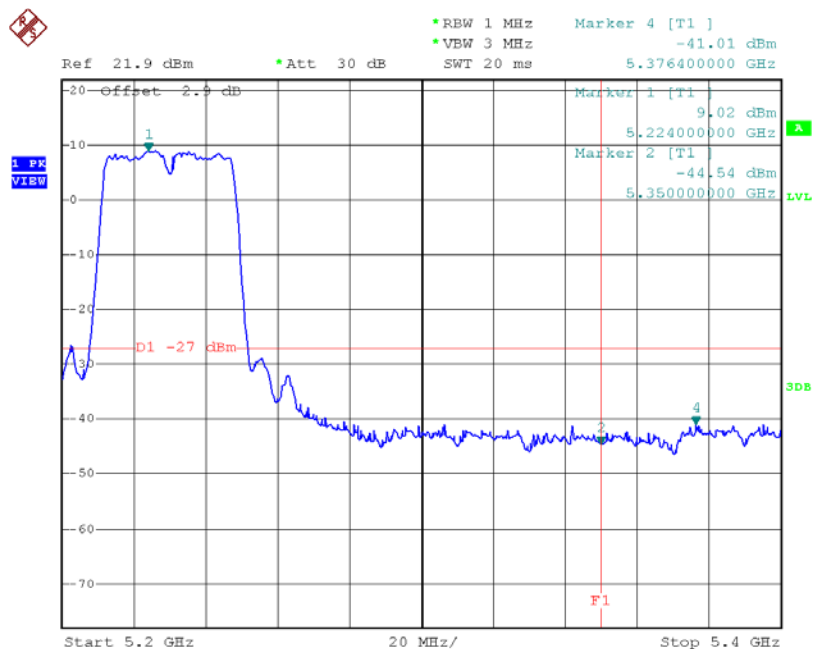

Date: 5.JUL.2015 20:30:07


Test Mode:	UNII-1/TX N40 Mode_ANT 5
------------	--------------------------

TX mode CH38

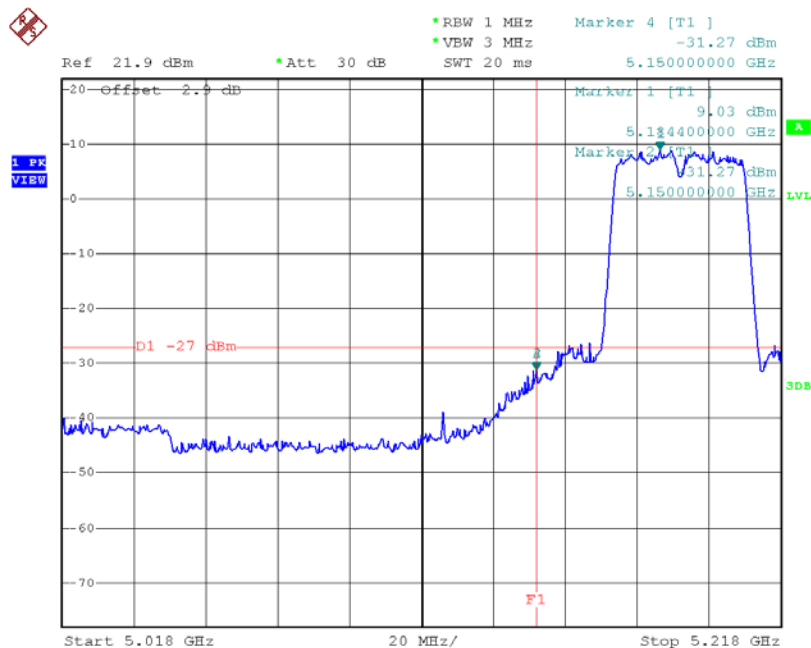

Date: 5.JUL.2015 20:38:49


TX mode CH46

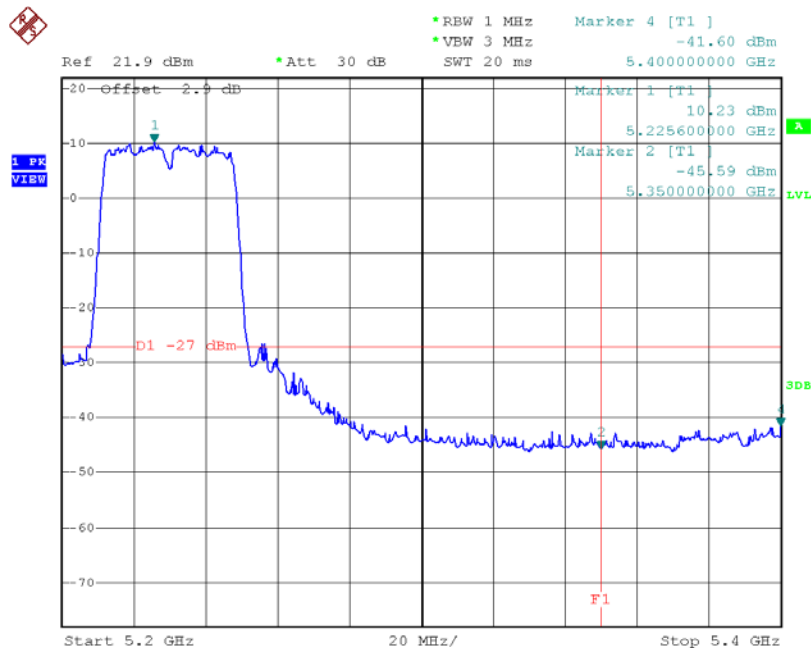

Date: 5.JUL.2015 20:40:54


Test Mode: UNII-1/TX N40 Mode_ANT 6

TX mode CH38

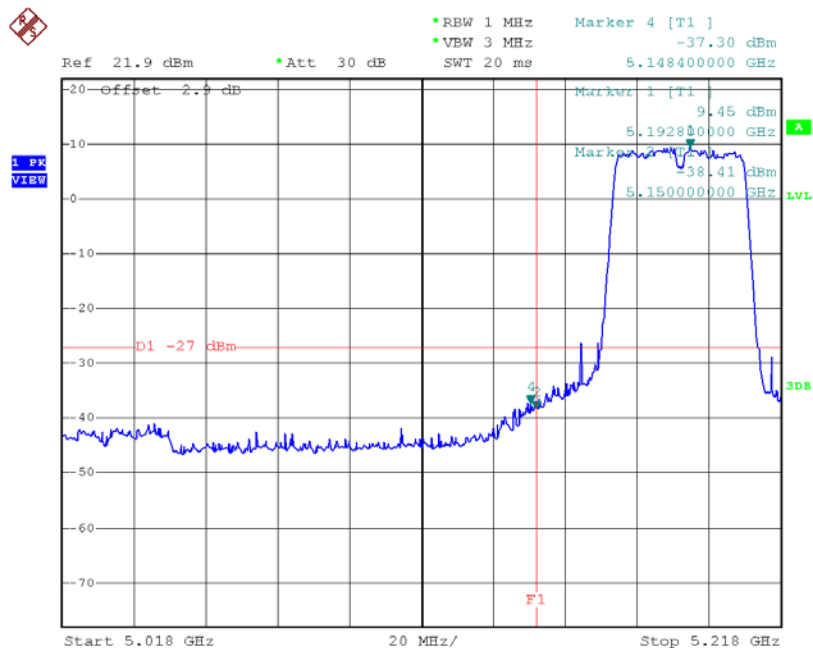

Date: 5.JUL.2015 20:50:13


TX mode CH46

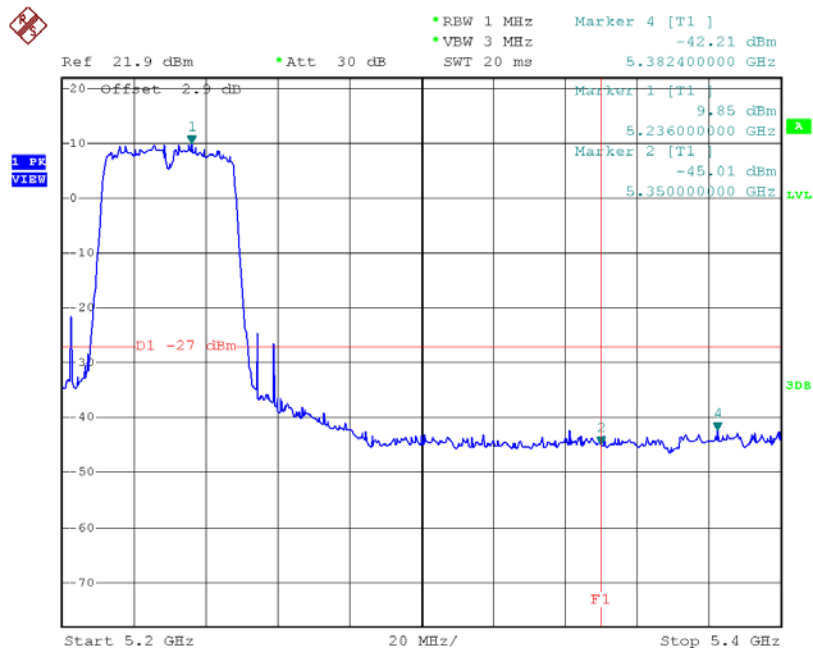

Date: 5.JUL.2015 20:51:12


Test Mode: UNII-2A/TX N20 Mode_ANT 4

TX mode CH52

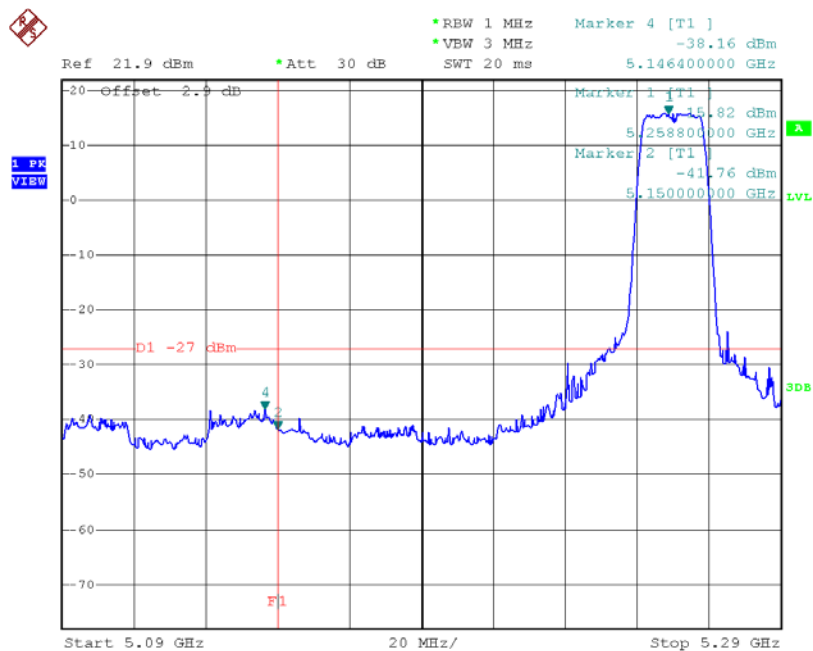

Date: 5.JUL.2015 18:11:57


TX mode CH64

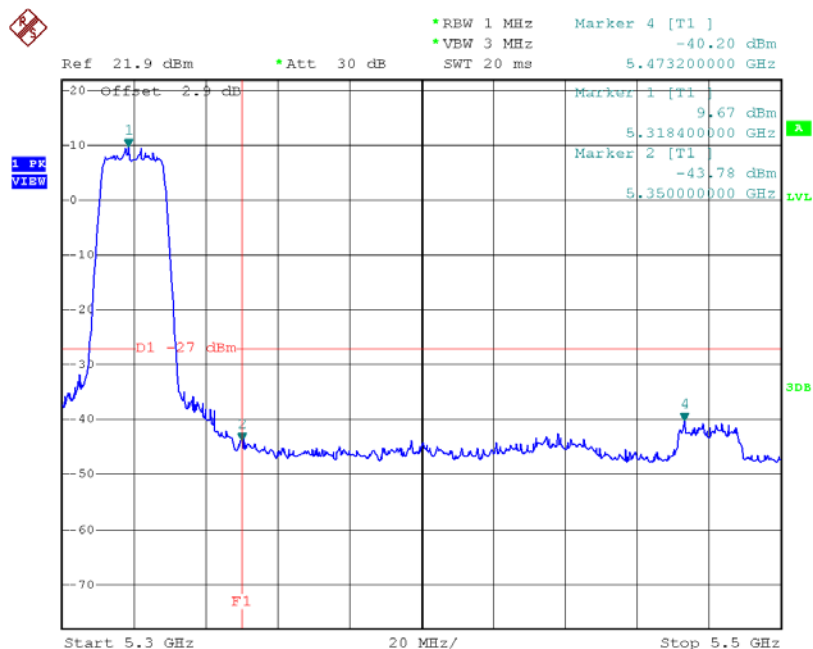

Date: 16.AUG.2015 13:36:30


Test Mode:	UNII-2A/TX N20 Mode_ANT 6
------------	---------------------------

TX mode CH52

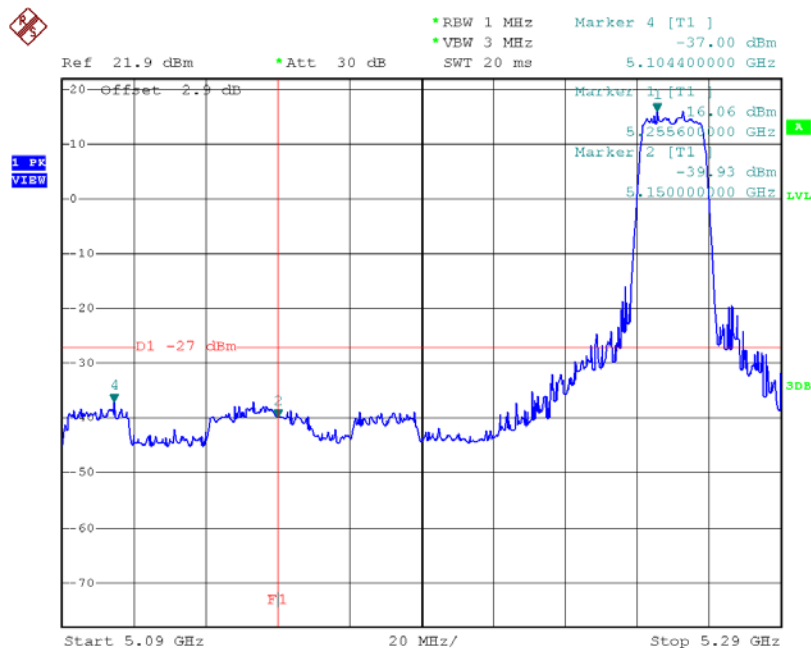

Date: 5.JUL.2015 18:52:07


TX mode CH64

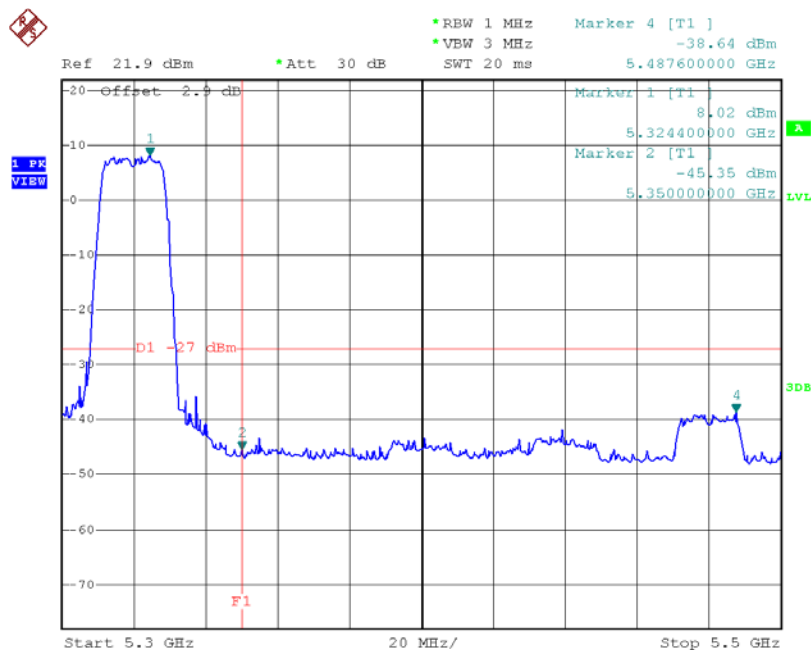

Date: 16.AUG.2015 13:37:57


Test Mode: UNII-2A/TX N40 Mode_ANT 4

TX mode CH54

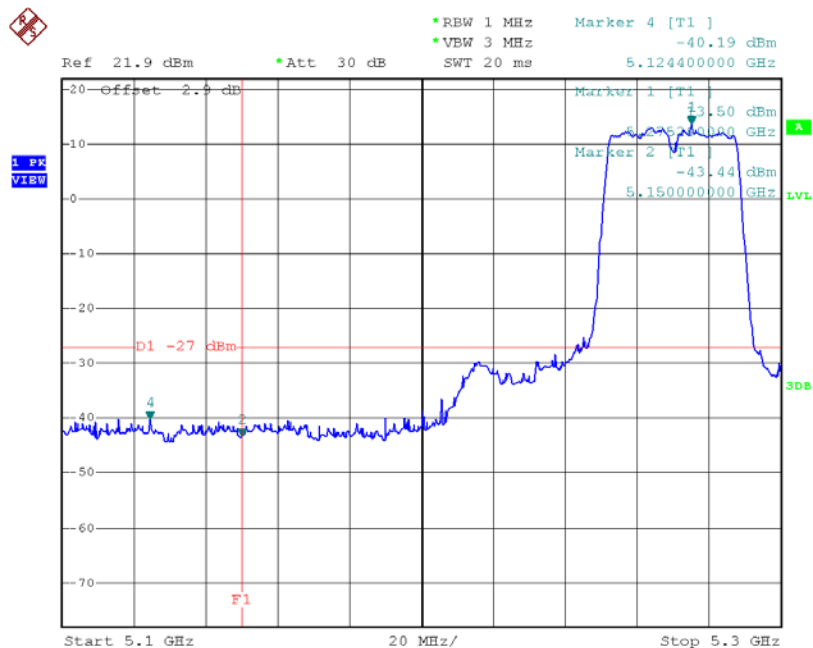

Date: 5.JUL.2015 20:31:13


TX mode CH62

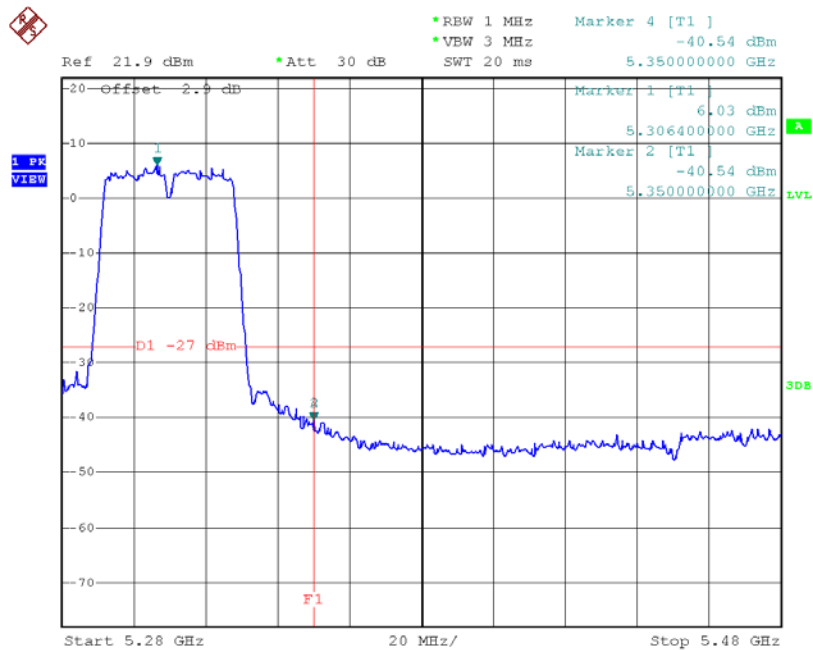

Date: 16.AUG.2015 13:48:12


Test Mode: UNII-2A/TX N40 Mode_ANT 5

TX mode CH54

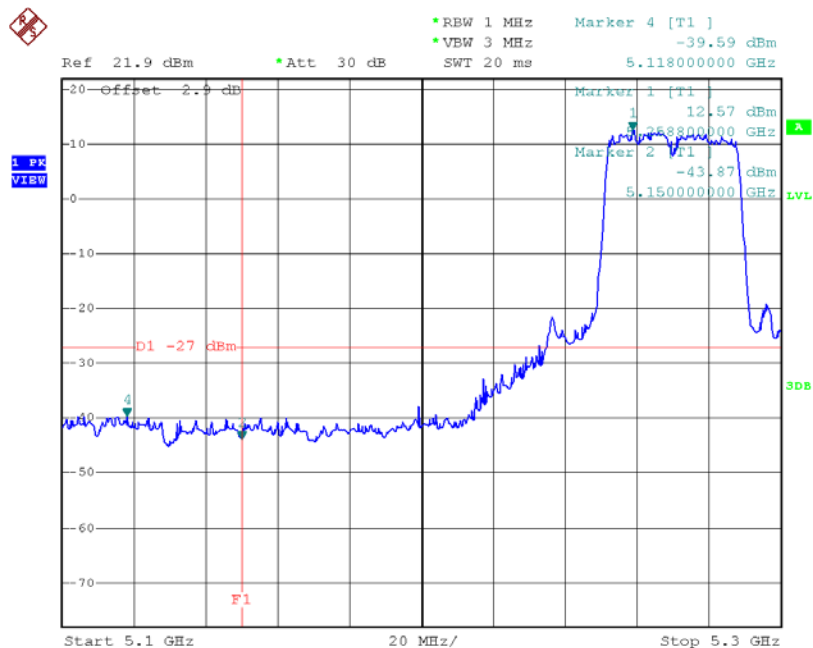

Date: 5.JUL.2015 20:41:51


TX mode CH62

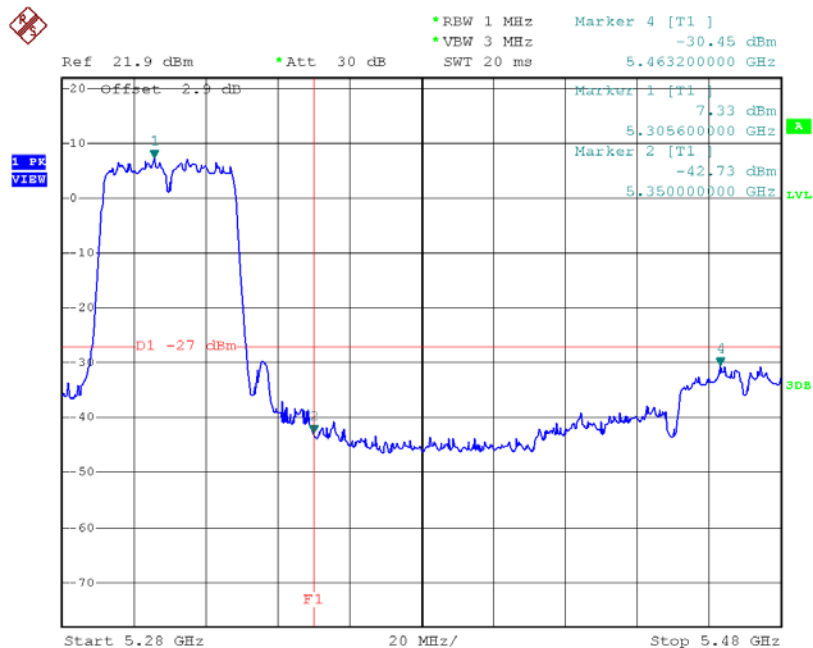

Date: 16.AUG.2015 13:49:17


Test Mode: UNII-2A/TX N40 Mode_ANT 6

TX mode CH54

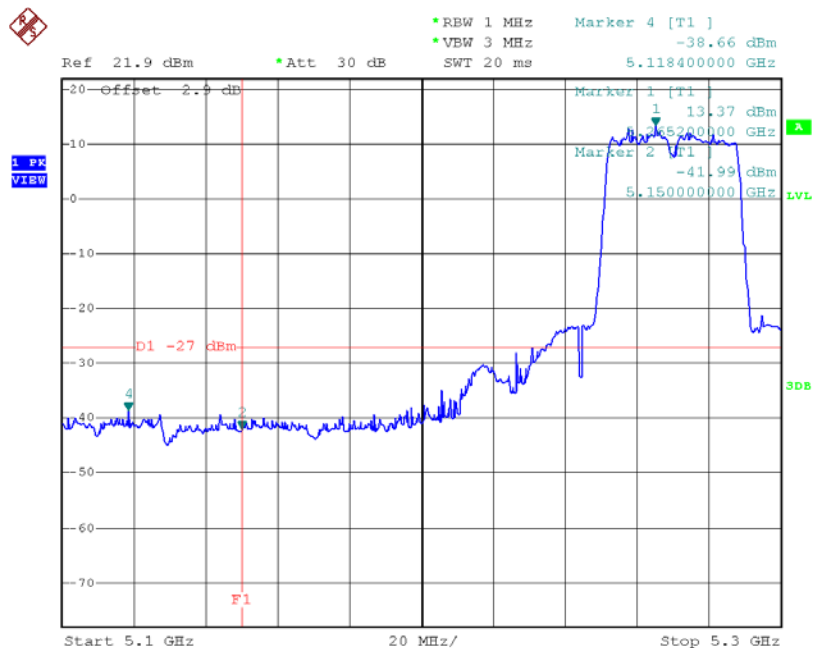

Date: 5.JUL.2015 20:52:43


TX mode CH62

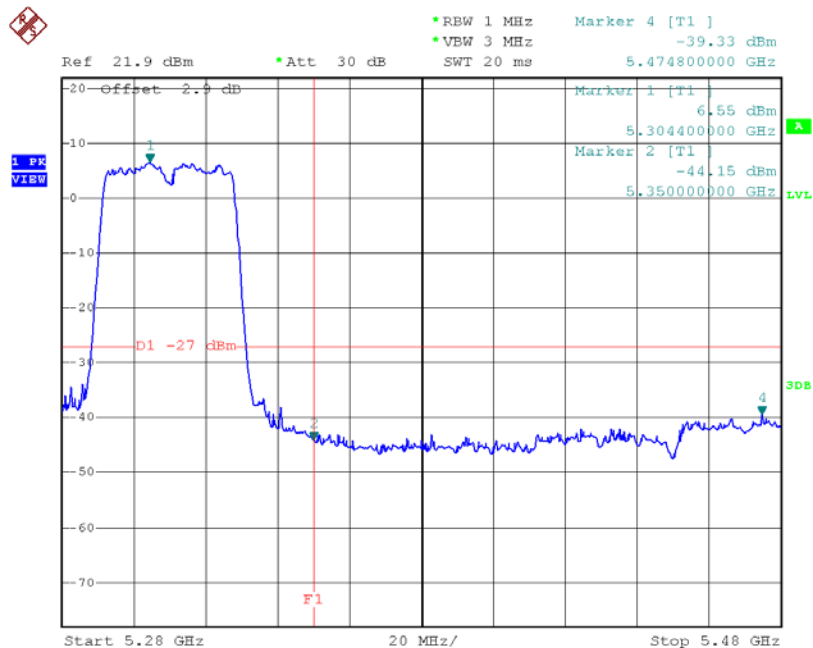

Date: 16.AUG.2015 13:50:21


Test Mode: UNII-2C/TX N20 Mode_ANT 4

TX mode CH100

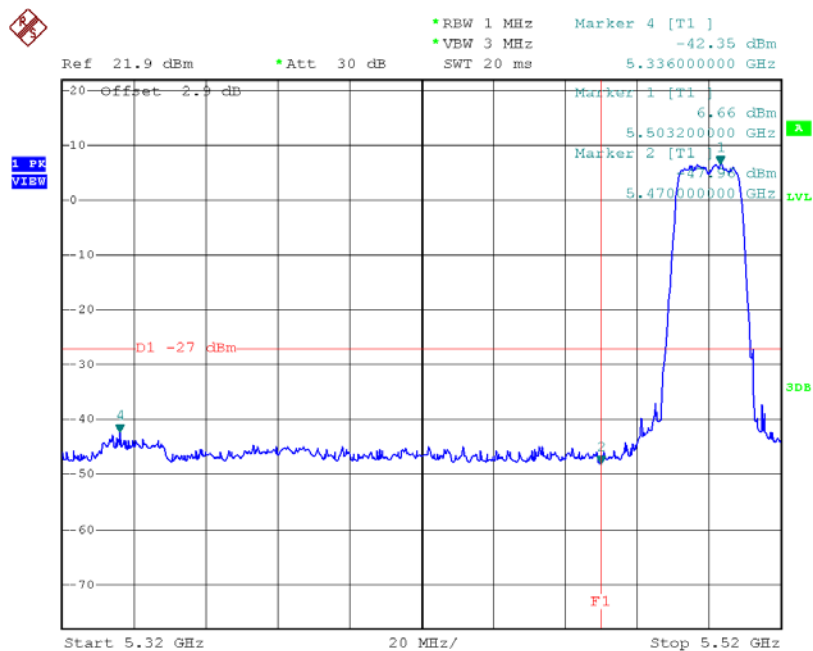

Date: 16.AUG.2015 13:42:40


TX mode CH140

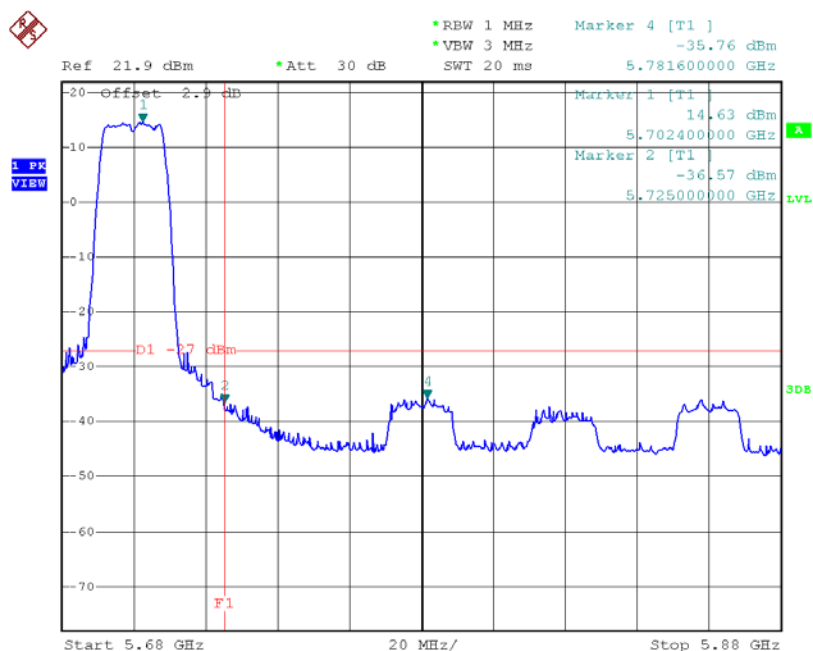

Date: 5.JUL.2015 18:16:53


Test Mode:	UNII-2C/TX N20 Mode_ANT 5
------------	---------------------------

TX mode CH100

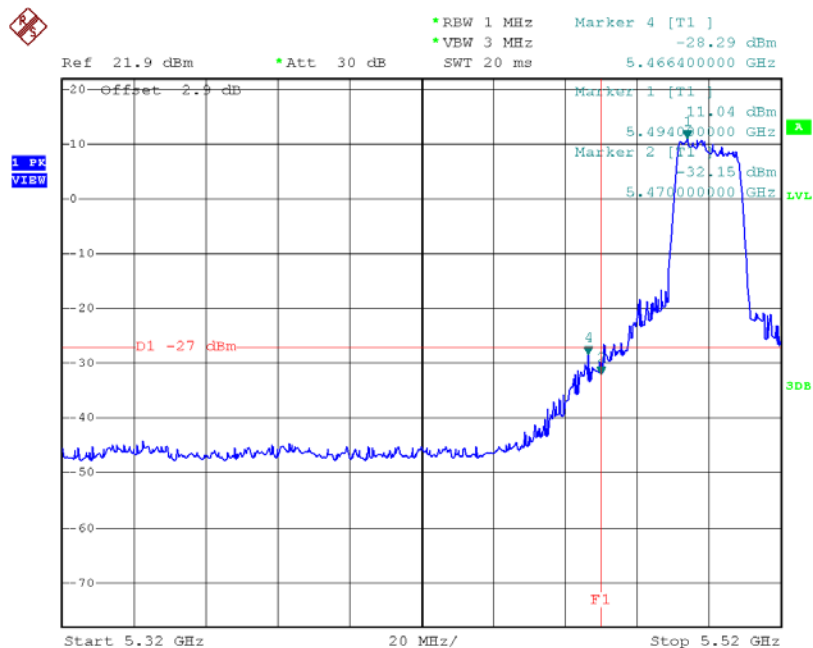

Date: 16.AUG.2015 13:41:37


TX mode CH140

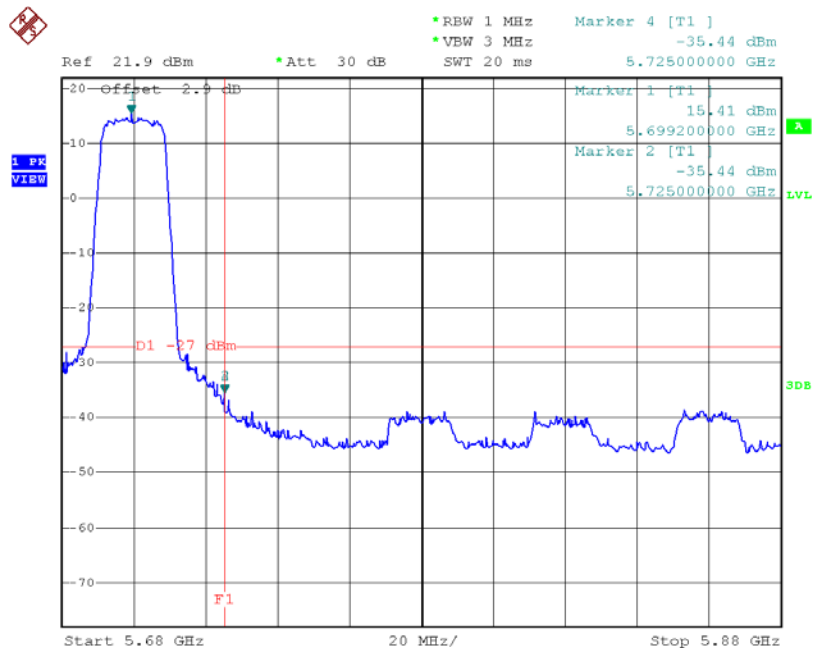

Date: 5.JUL.2015 18:44:46


Test Mode: UNII-2C/TX N20 Mode_ANT 6

TX mode CH100

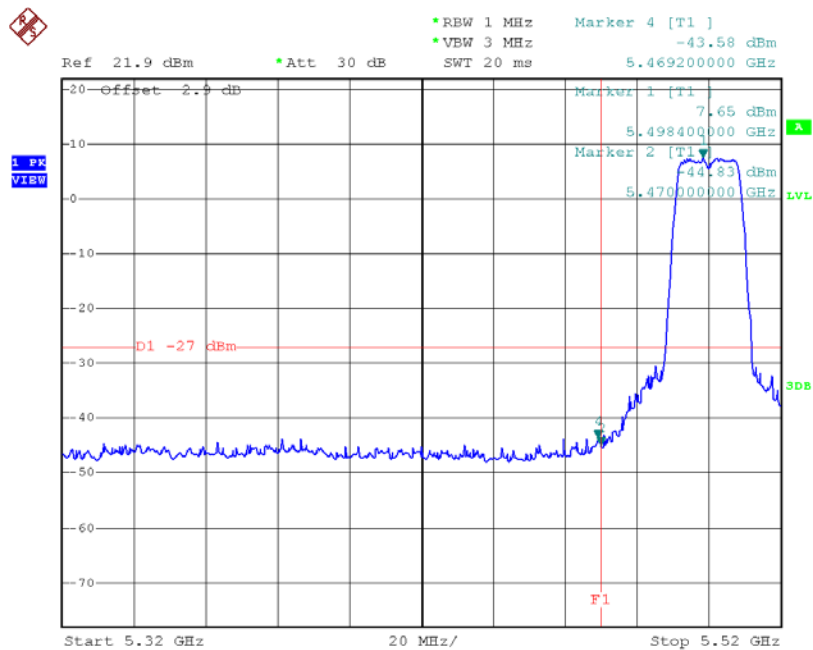

Date: 16.AUG.2015 13:39:55


TX mode CH140

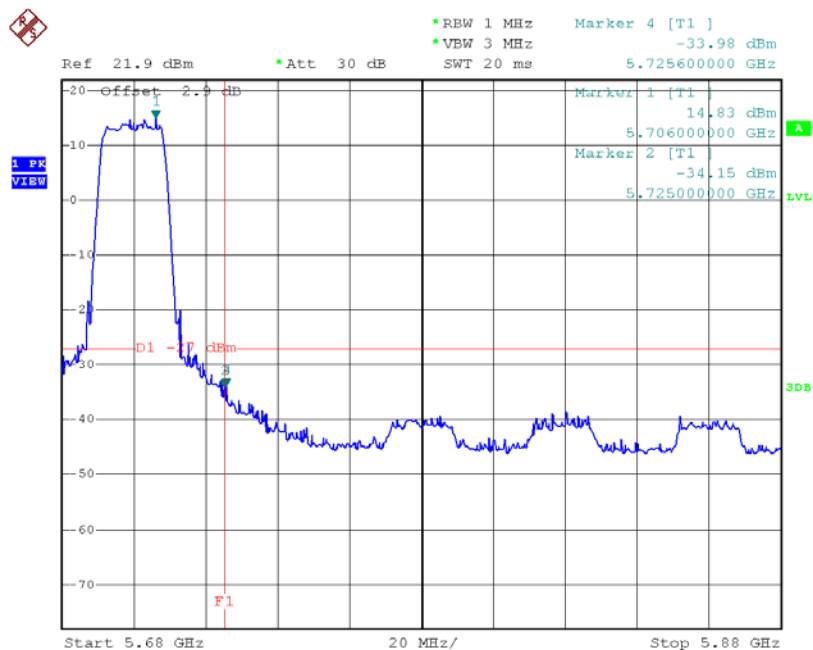

Date: 5.JUL.2015 18:55:55


Test Mode:	UNII-2C/TX N40 Mode_ANT 4
------------	---------------------------

TX mode CH102

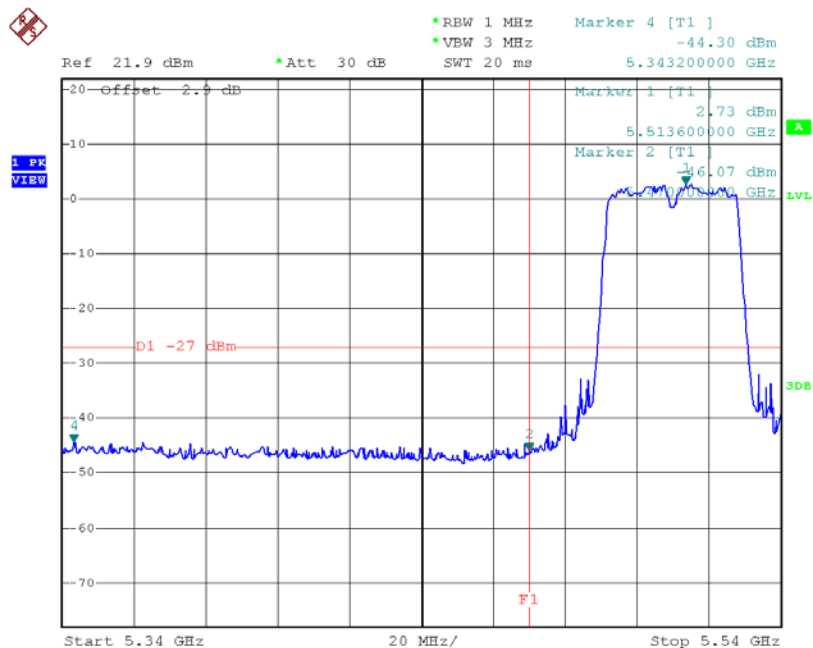

Date: 16.AUG.2015 13:54:32


TX mode CH134

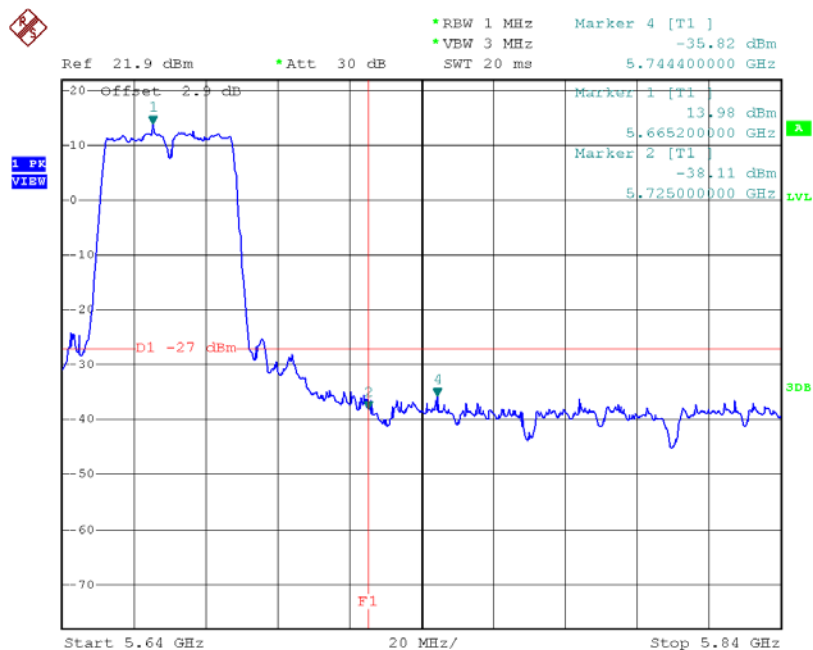

Date: 5.JUL.2015 20:34:59


Test Mode:	UNII-2C/TX N40 Mode_ANT 5
------------	---------------------------

TX mode CH102

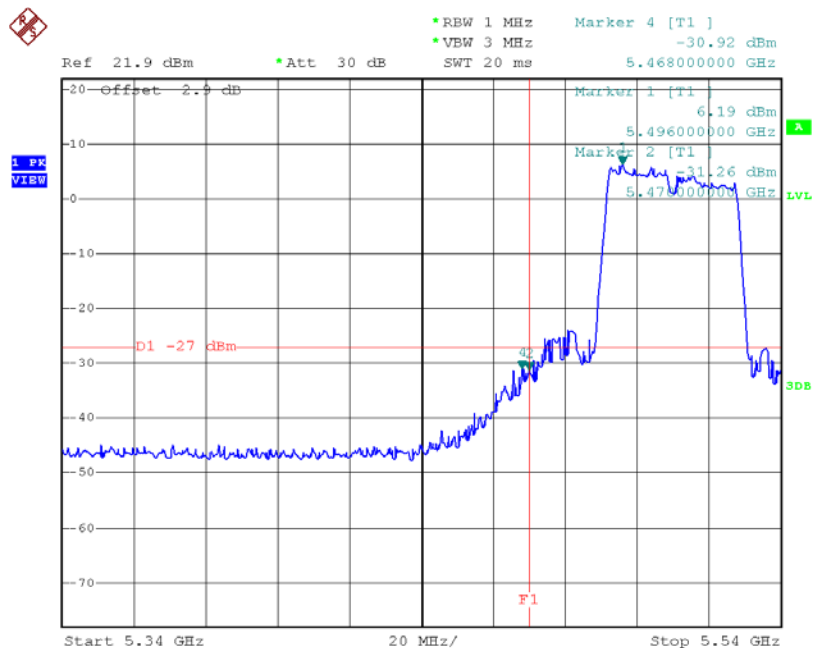

Date: 16.AUG.2015 13:53:31


TX mode CH134

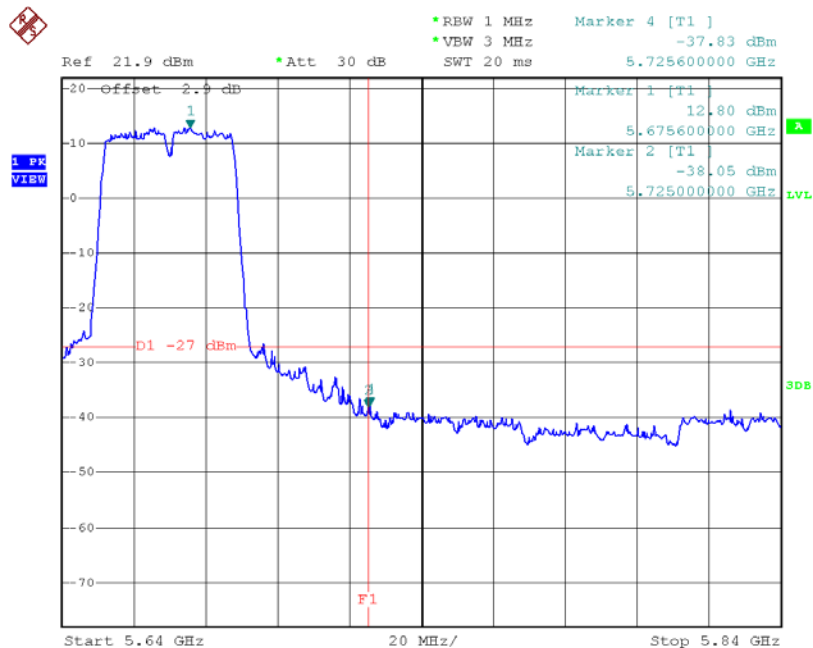

Date: 5.JUL.2015 20:46:34


Test Mode: UNII-2C/TX N40 Mode_ANT 6

TX mode CH102

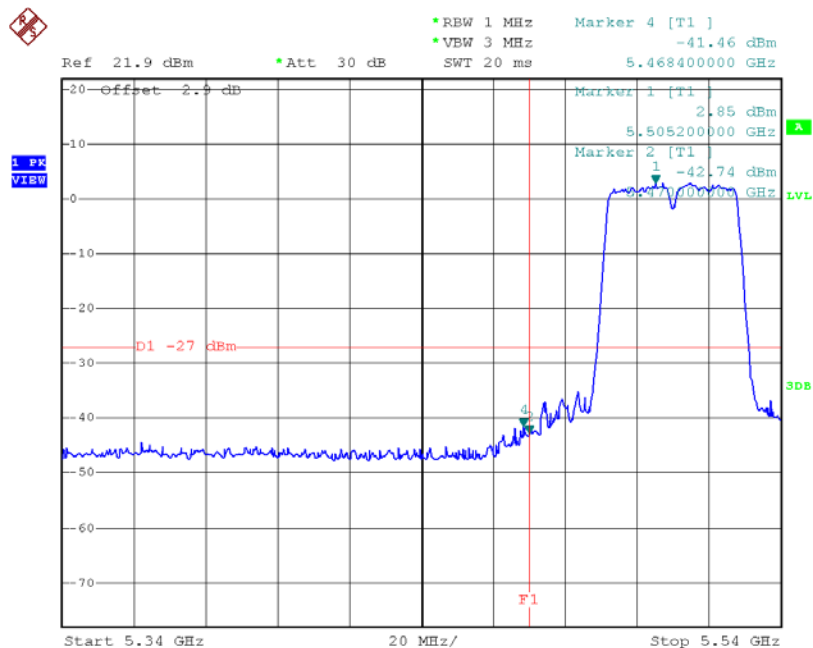

Date: 16.AUG.2015 13:52:24

TX mode CH134

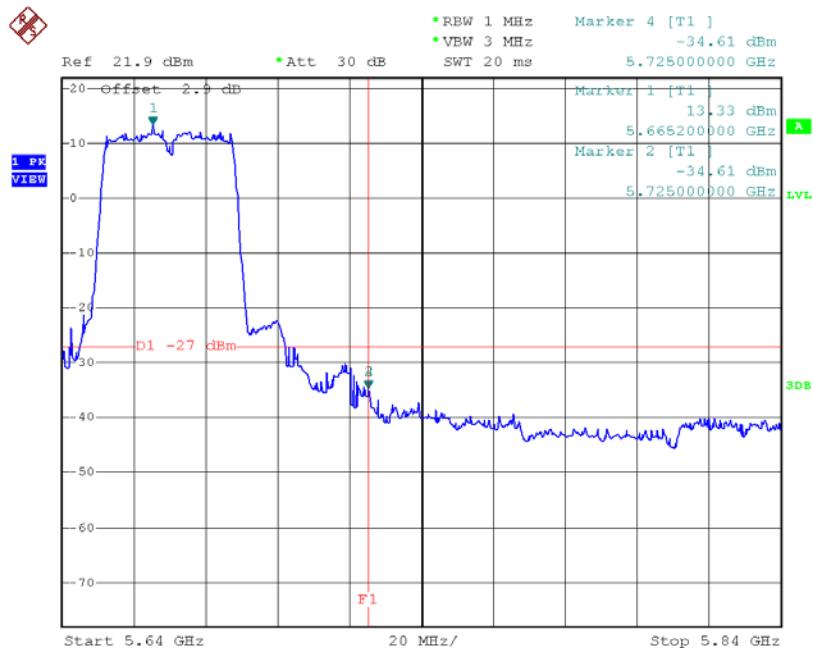

Date: 5.JUL.2015 20:56:38