



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5530MHz

Vertical

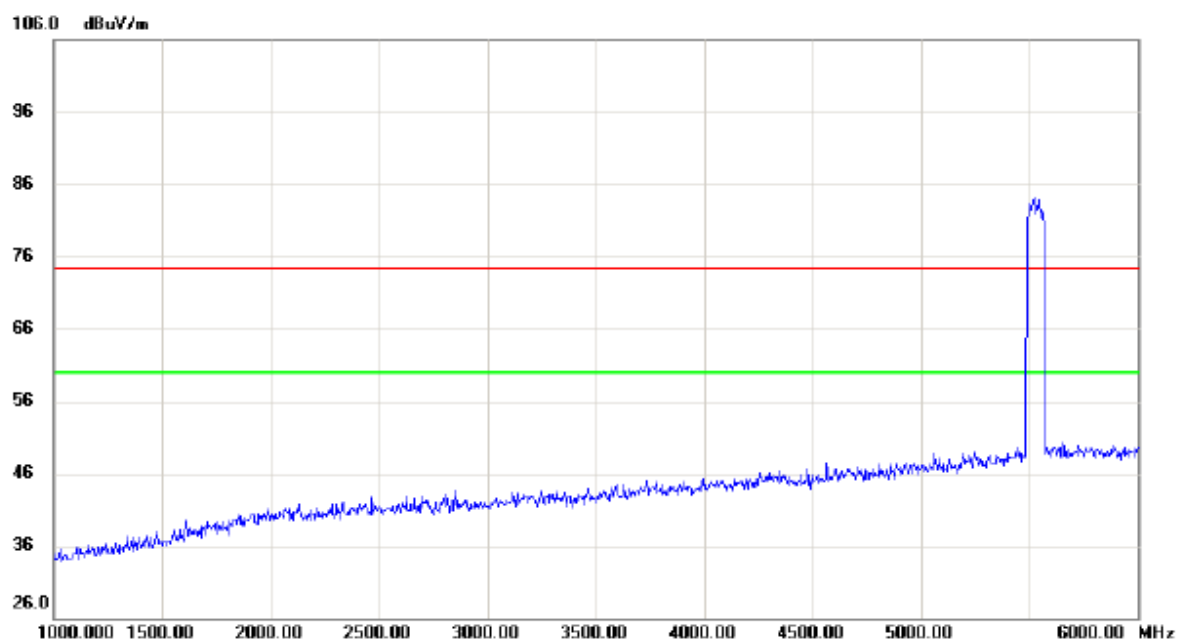


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

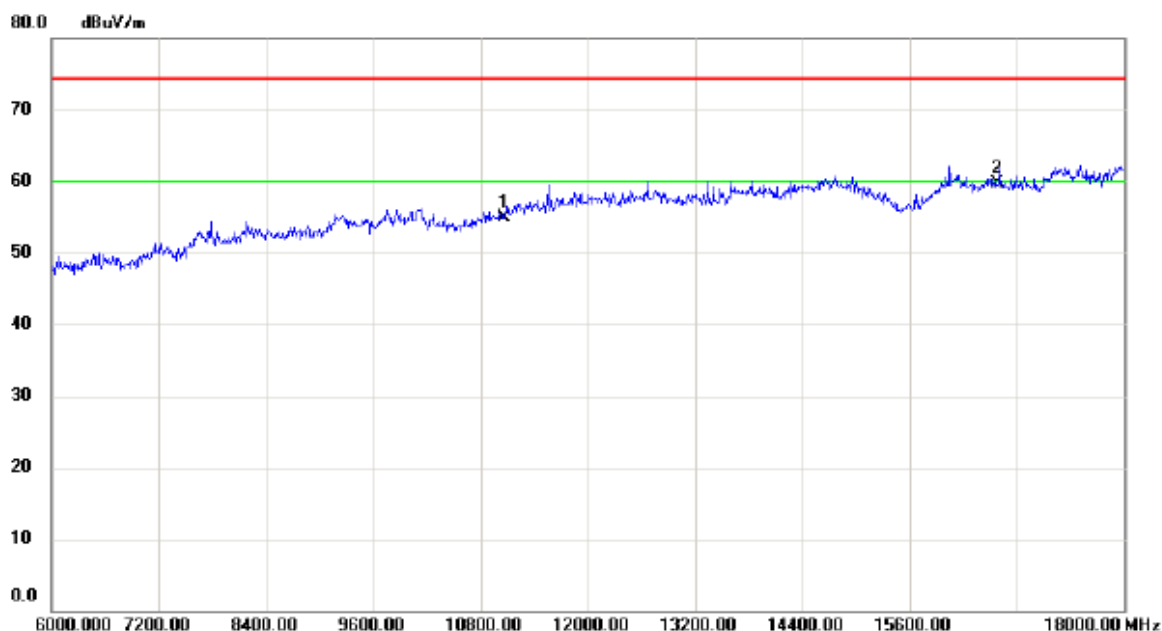


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	38.93	15.89	54.82	74.30	-19.48	peak	
2	*	16590.00	39.24	20.45	59.69	74.30	-14.61	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5530MHz

Vertical

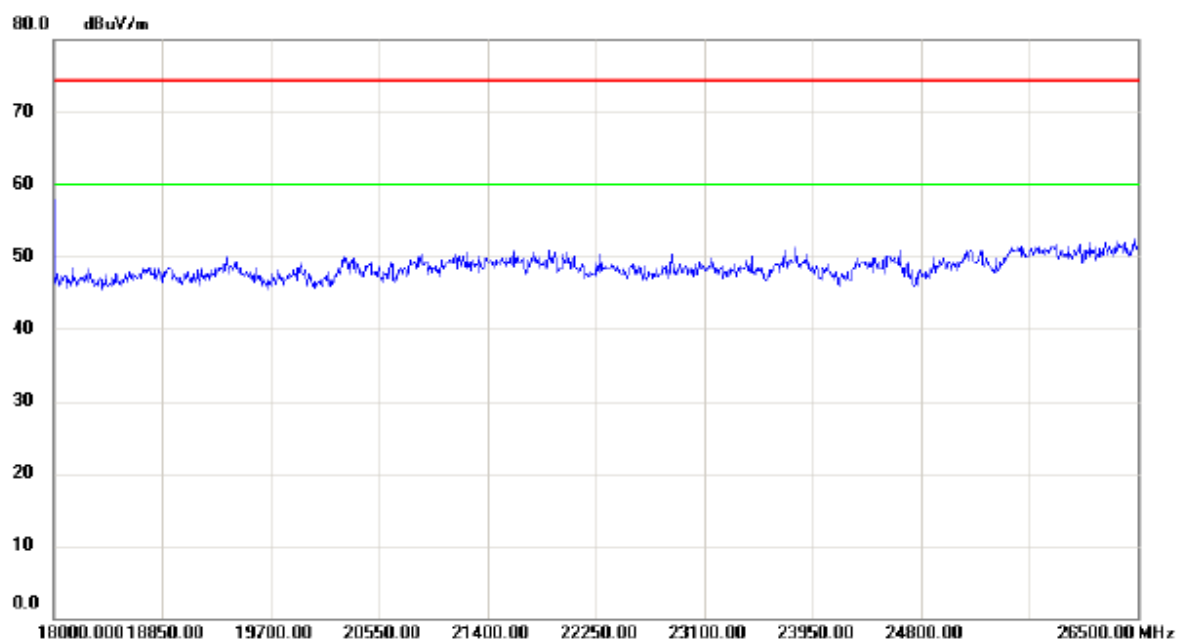


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

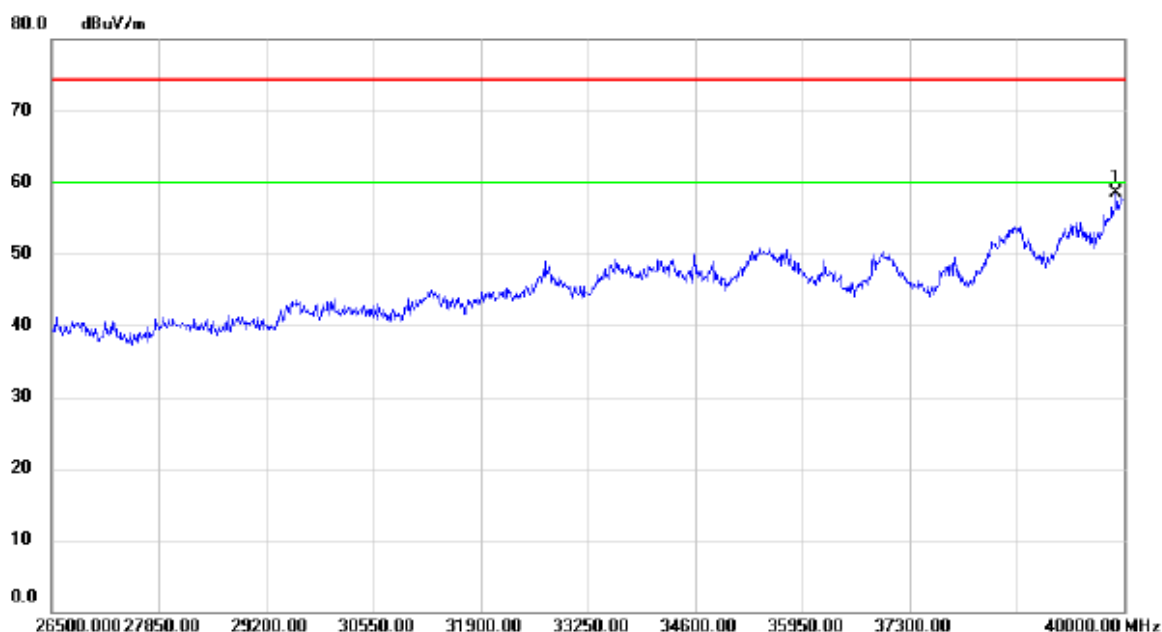

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39905.50	41.18	17.37	58.55	74.30	-15.75	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5530MHz


Horizontal

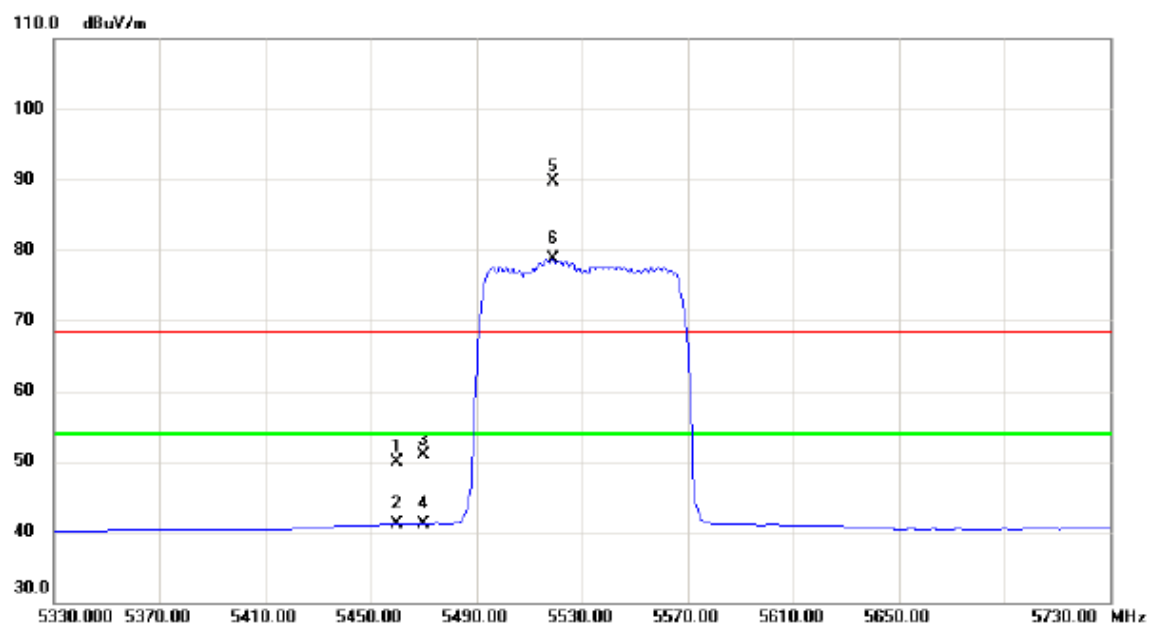


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	9.08	40.87	49.95	68.30	-18.35	peak	
2		5460.000	0.17	40.87	41.04	54.00	-12.96	AVG	
3		5470.000	9.98	40.90	50.88	68.30	-17.42	peak	
4		5470.000	0.25	40.90	41.15	54.00	-12.85	AVG	
5	X	5518.800	48.72	40.99	89.71	68.30	21.41	peak	No Limit
6	*	5518.800	37.73	40.99	78.72	54.00	24.72	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5530MHz

Horizontal

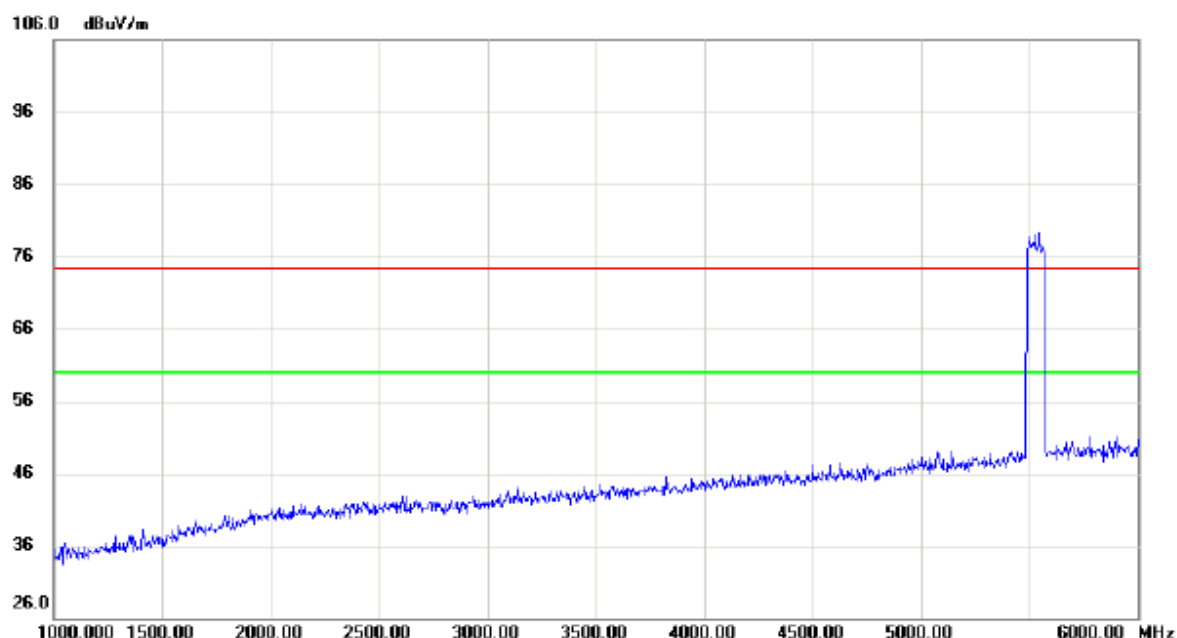


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

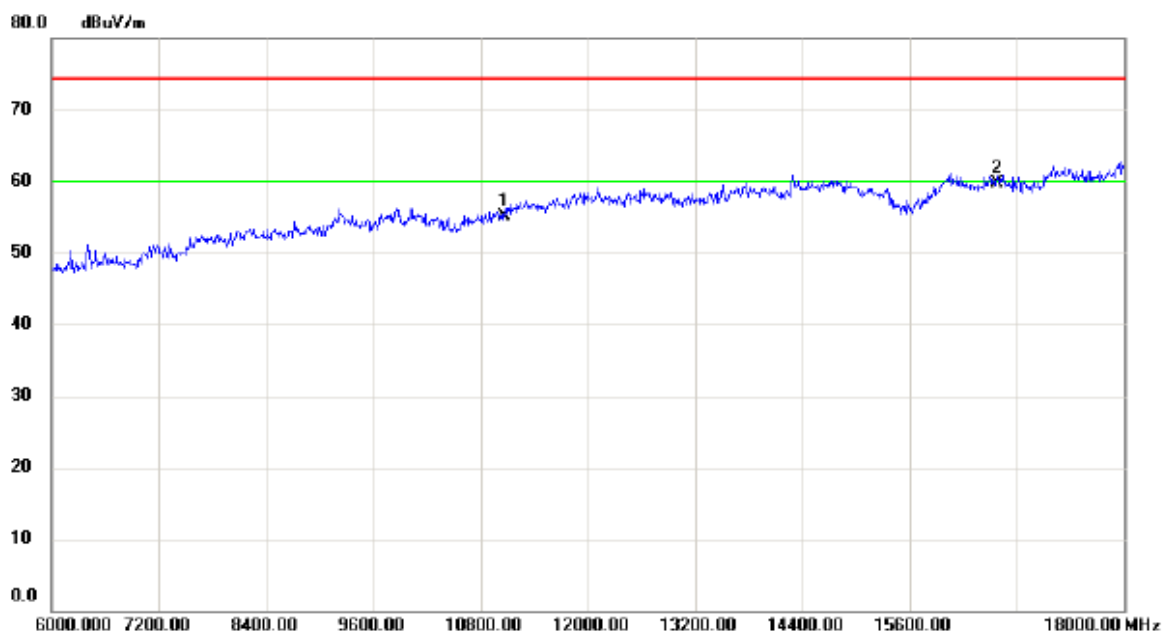


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	39.18	15.89	55.07	74.30	-19.23	peak	
2	*	16590.00	39.23	20.45	59.68	74.30	-14.62	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5530MHz

Horizontal

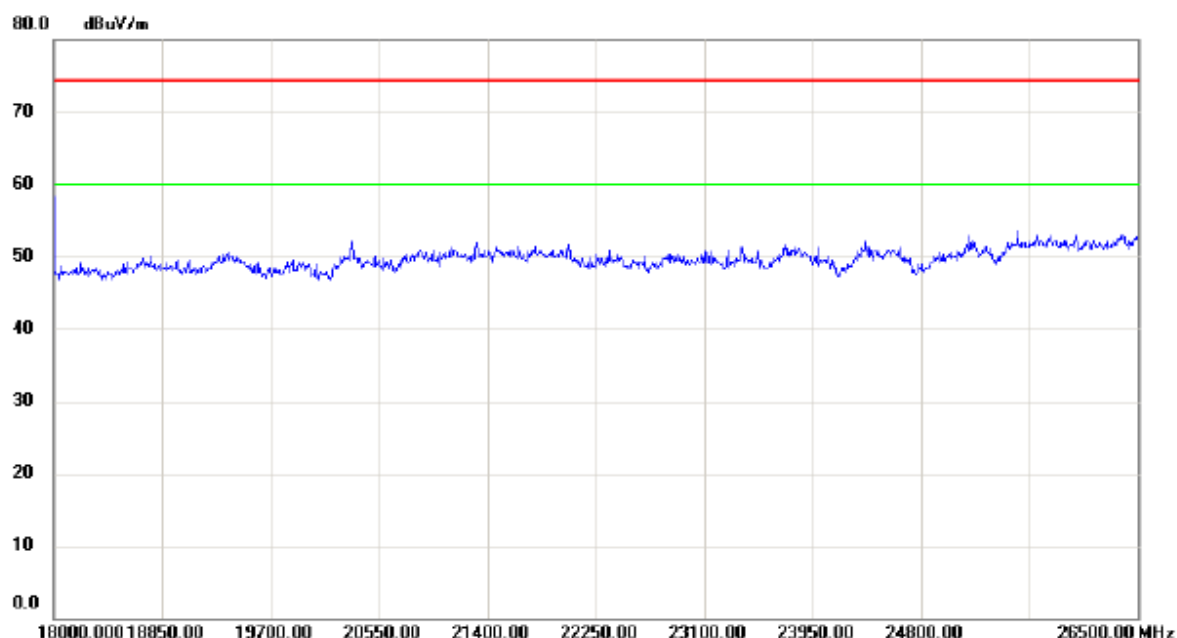


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

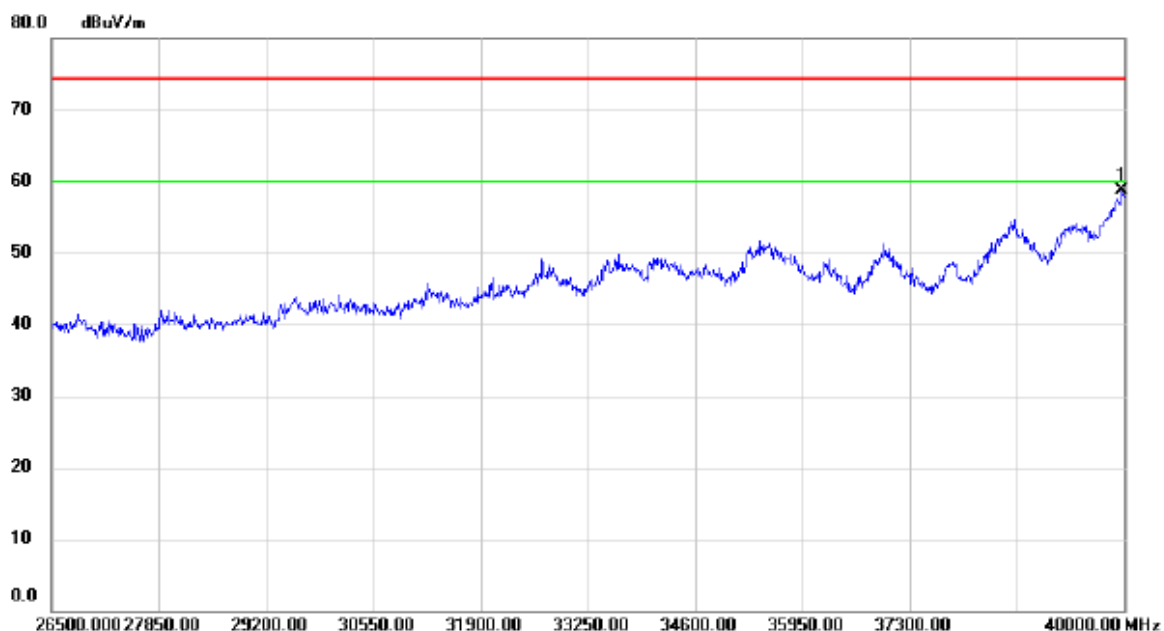

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	41.12	17.54	58.66	74.30	-15.64	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5610MHz


Vertical

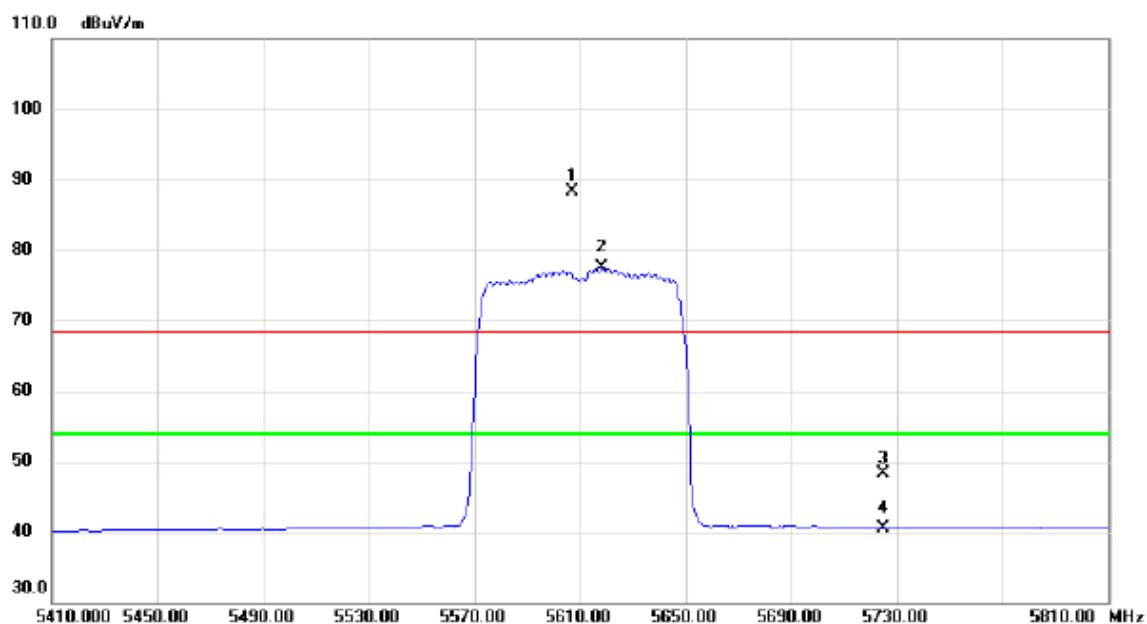


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5606.800	47.30	41.10	88.40	68.30	20.10	peak	No Limit
2	*	5618.400	36.32	41.12	77.44	54.00	23.44	AVG	No Limit
3		5725.000	7.07	41.27	48.34	68.30	-19.96	peak	
4		5725.000	-0.76	41.27	40.51	54.00	-13.49	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5610MHz

Vertical

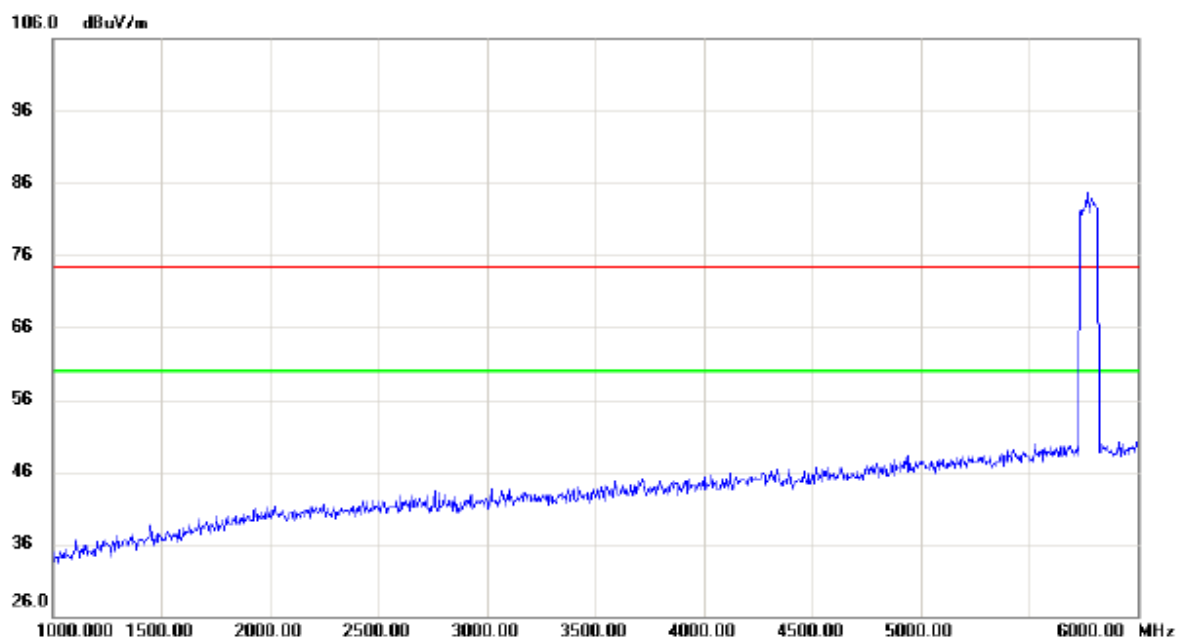


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

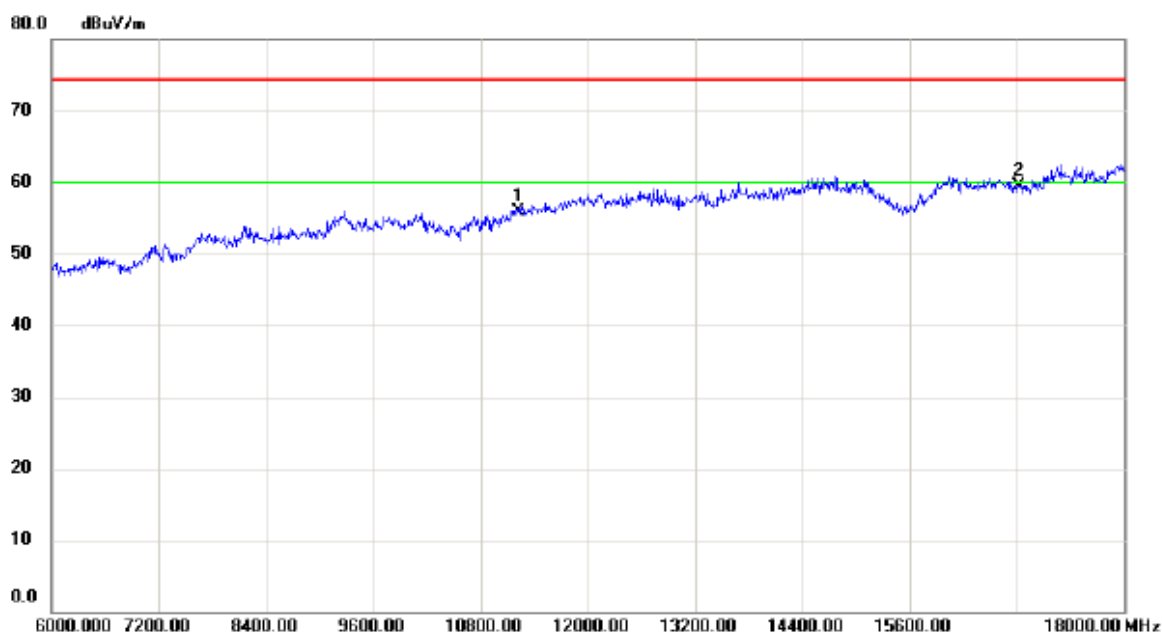


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	39.64	16.27	55.91	74.30	-18.39	peak	
2	*	16830.00	38.95	20.63	59.58	74.30	-14.72	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5610MHz

Vertical

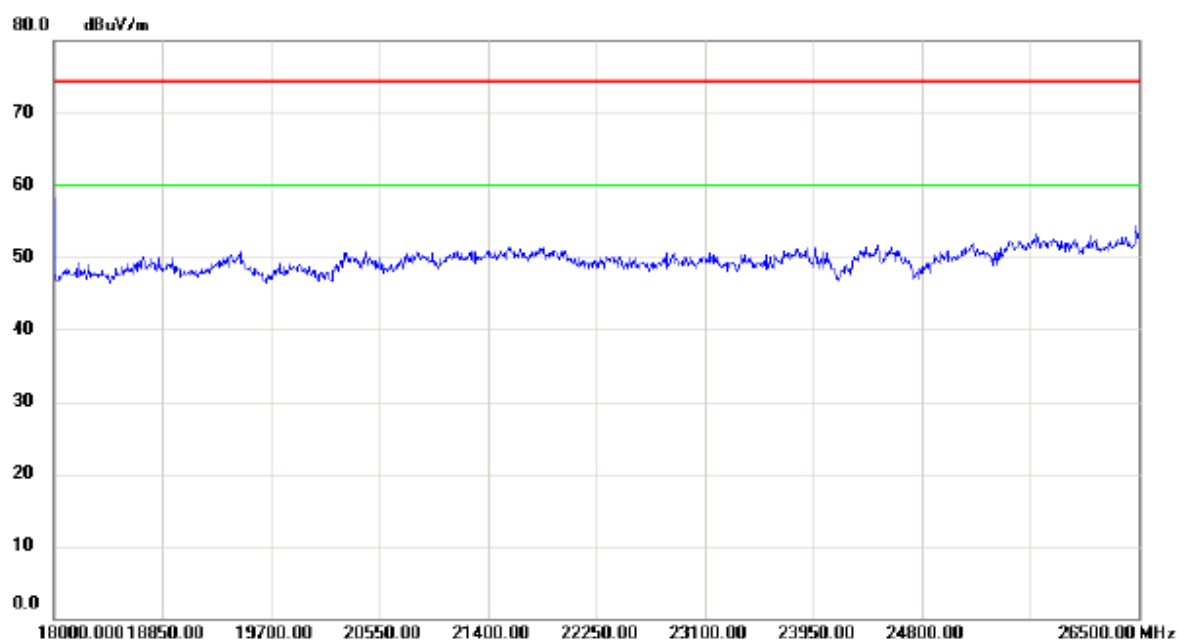


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

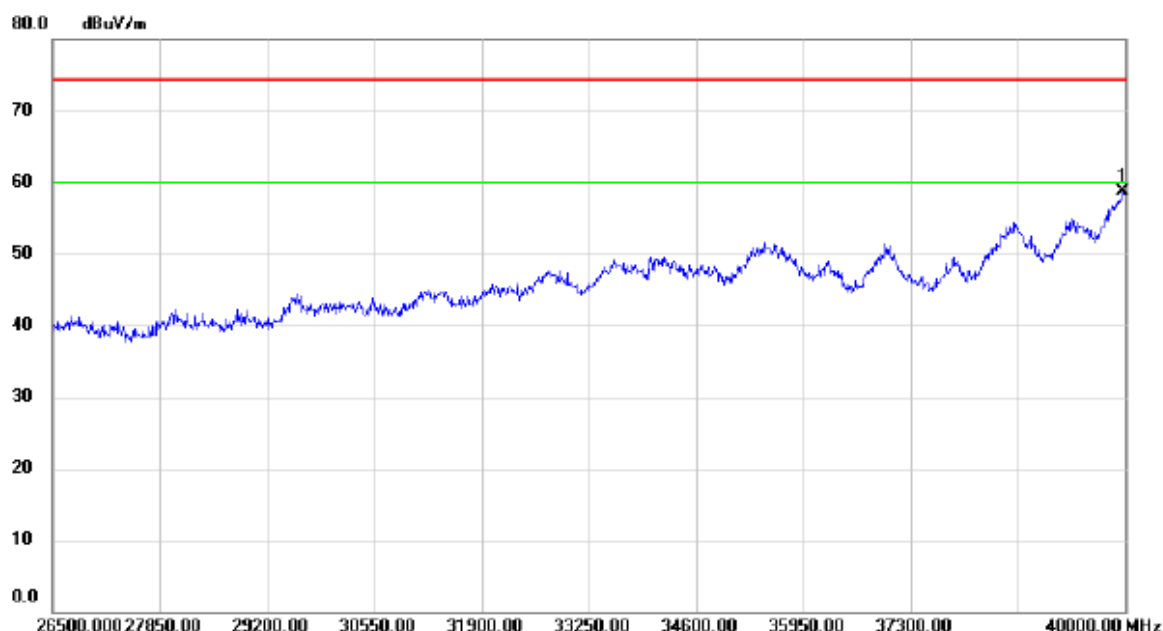

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	41.10	17.54	58.64	74.30	-15.66	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5610MHz


Horizontal

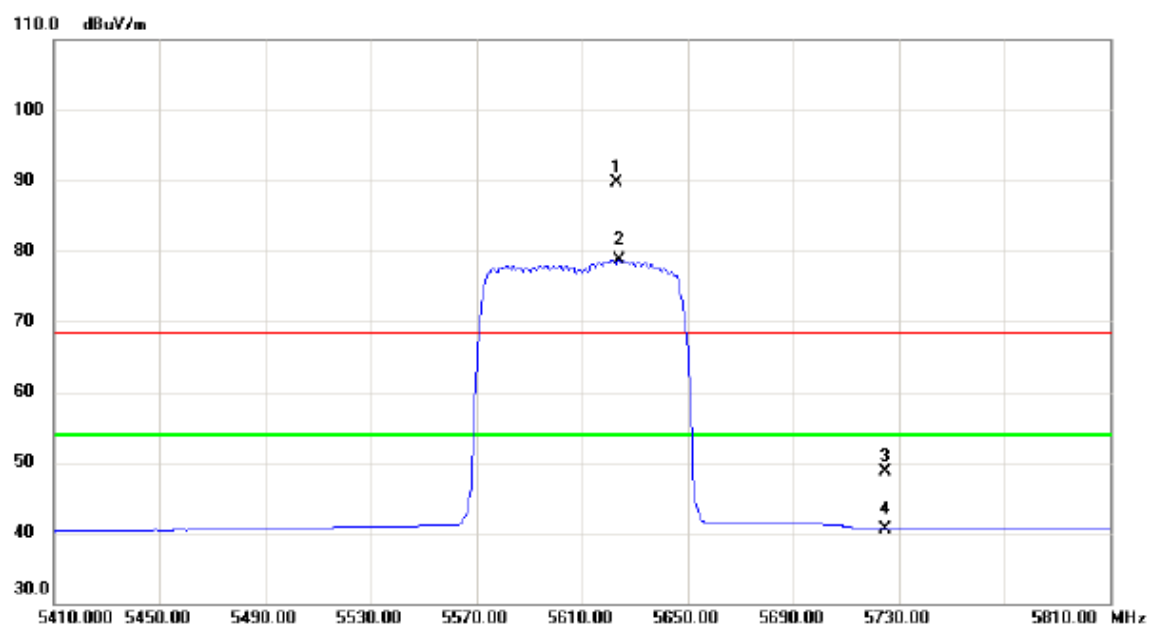


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5622.800	48.56	41.13	89.69	68.30	21.39	peak	No Limit
2	*	5624.000	37.58	41.13	78.71	54.00	24.71	AVG	No Limit
3		5725.000	7.40	41.27	48.67	68.30	-19.63	peak	
4		5725.000	-0.69	41.27	40.58	54.00	-13.42	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5610MHz

Horizontal

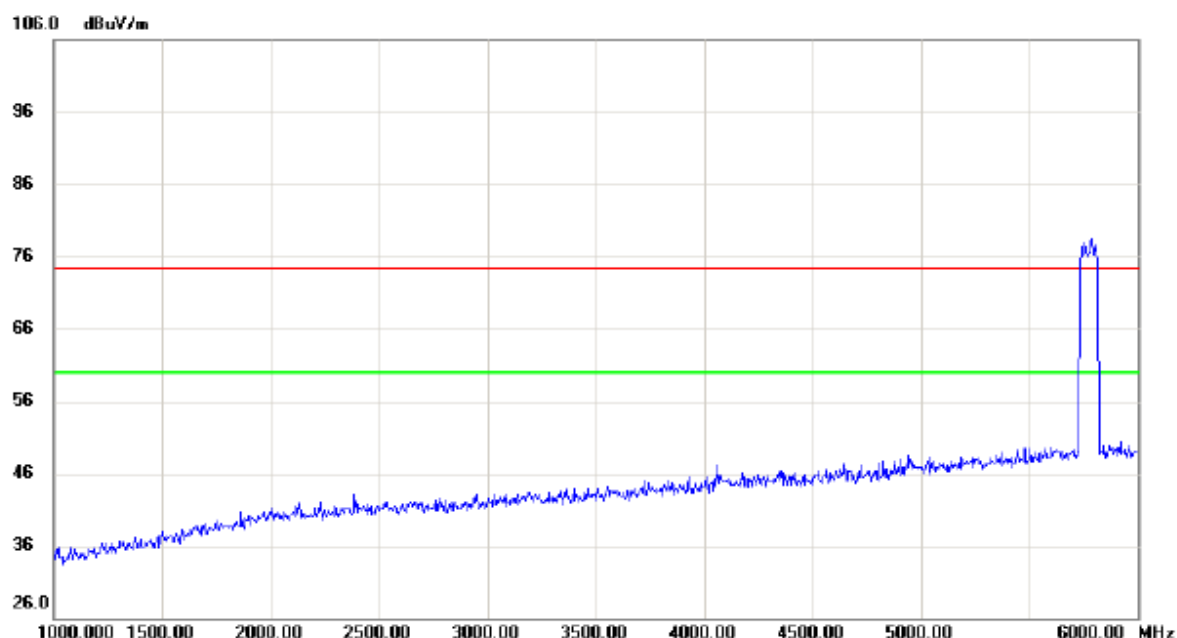


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

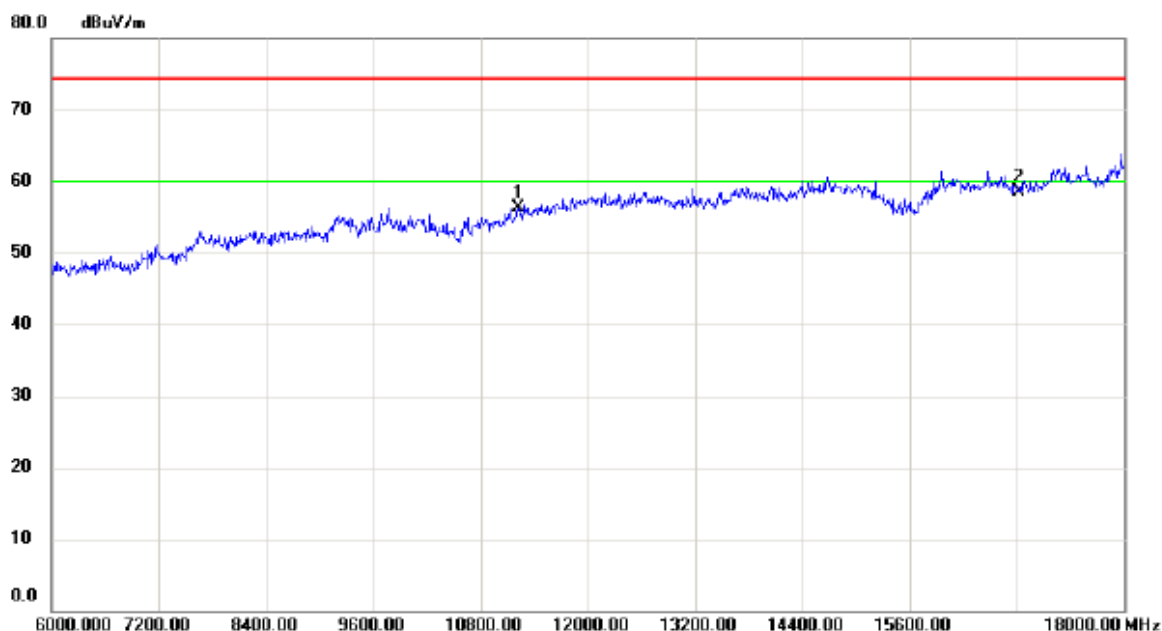


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	39.94	16.27	56.21	74.30	-18.09	peak	
2	*	16830.00	37.97	20.63	58.60	74.30	-15.70	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC(VHT80) Mode 5610MHz

Horizontal

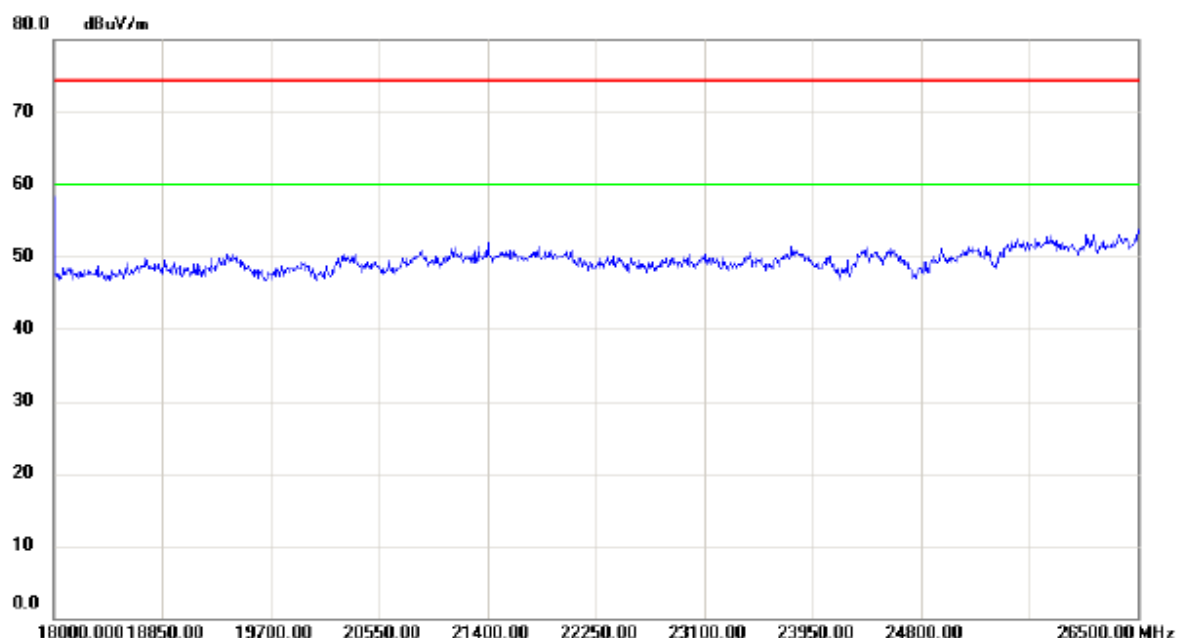


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

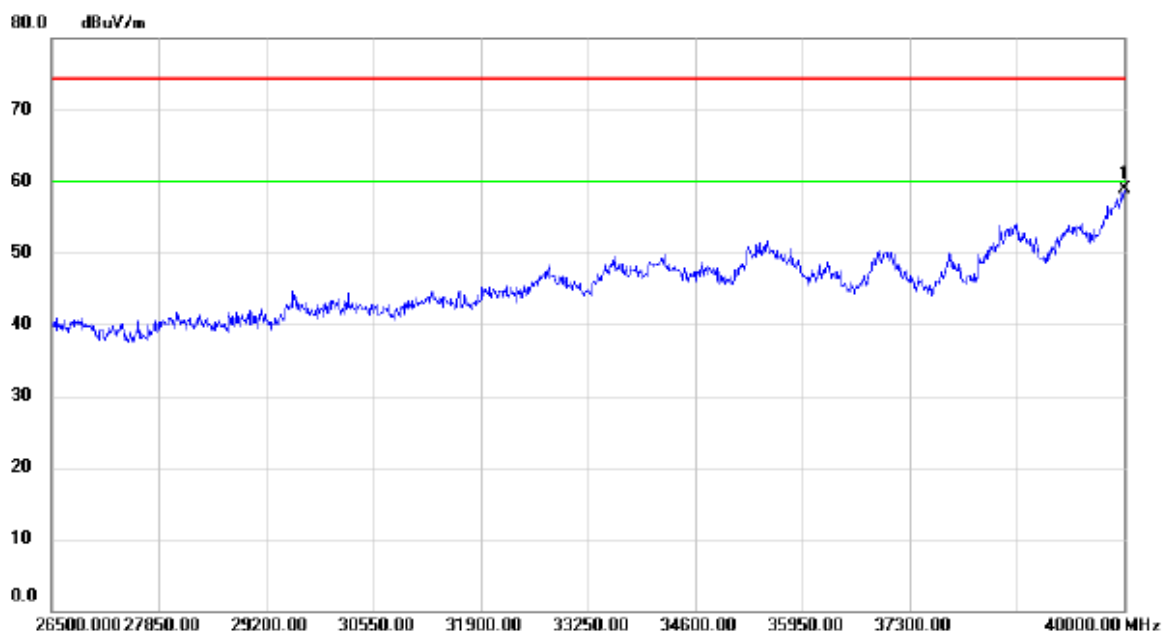

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	41.28	17.60	58.88	74.30	-15.42	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

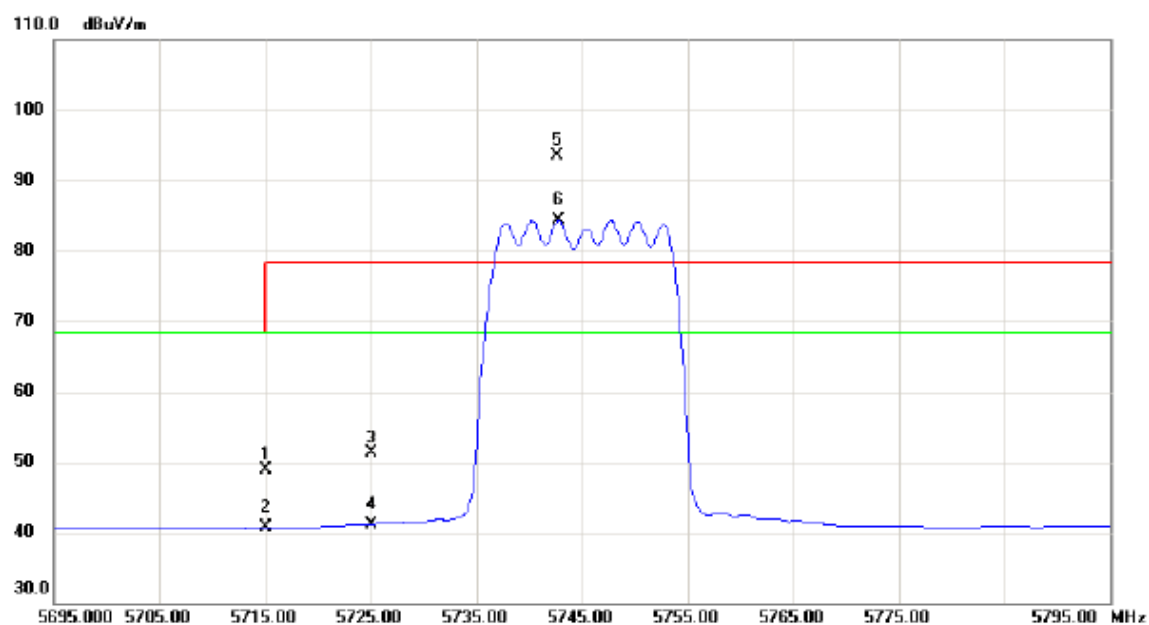


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	7.65	41.25	48.90	68.30	-19.40	peak	
2		5715.000	-0.56	41.25	40.69	68.30	-27.61	AVG	
3		5725.000	10.07	41.27	51.34	78.30	-26.96	peak	
4		5725.000	-0.14	41.27	41.13	68.30	-27.17	AVG	
5	X	5742.600	52.31	41.29	93.60	78.30	15.30	peak	No Limit
6	*	5742.800	42.97	41.29	84.26	68.30	15.96	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

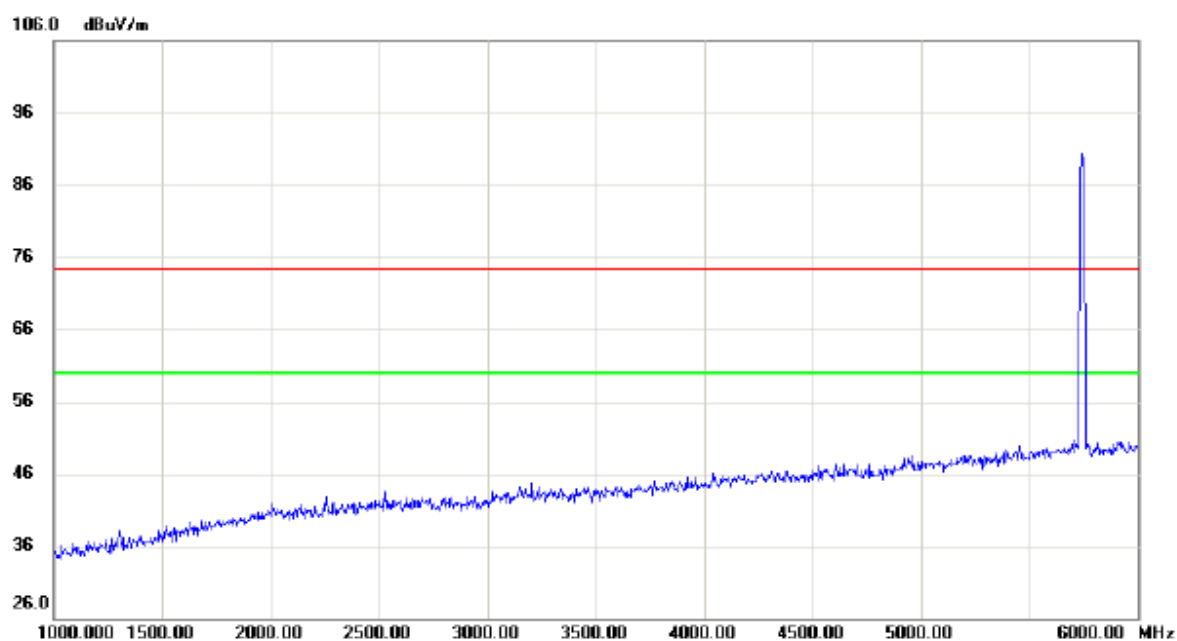


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

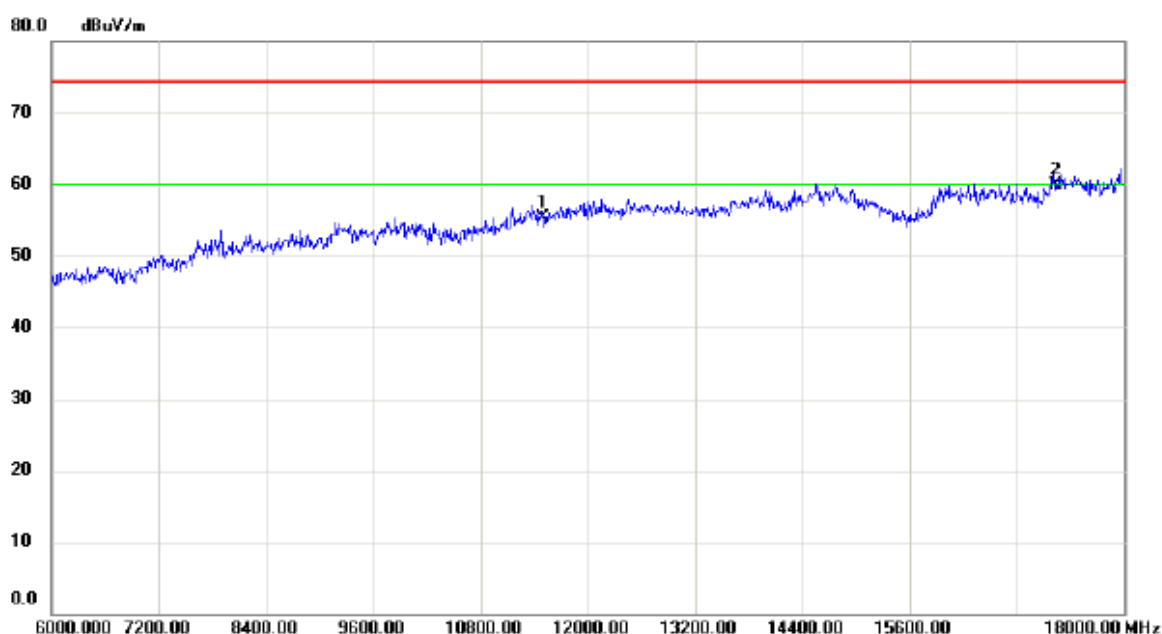


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	38.35	16.91	55.26	74.30	-19.04	peak	
2	*	17235.00	38.29	21.53	59.82	74.30	-14.48	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

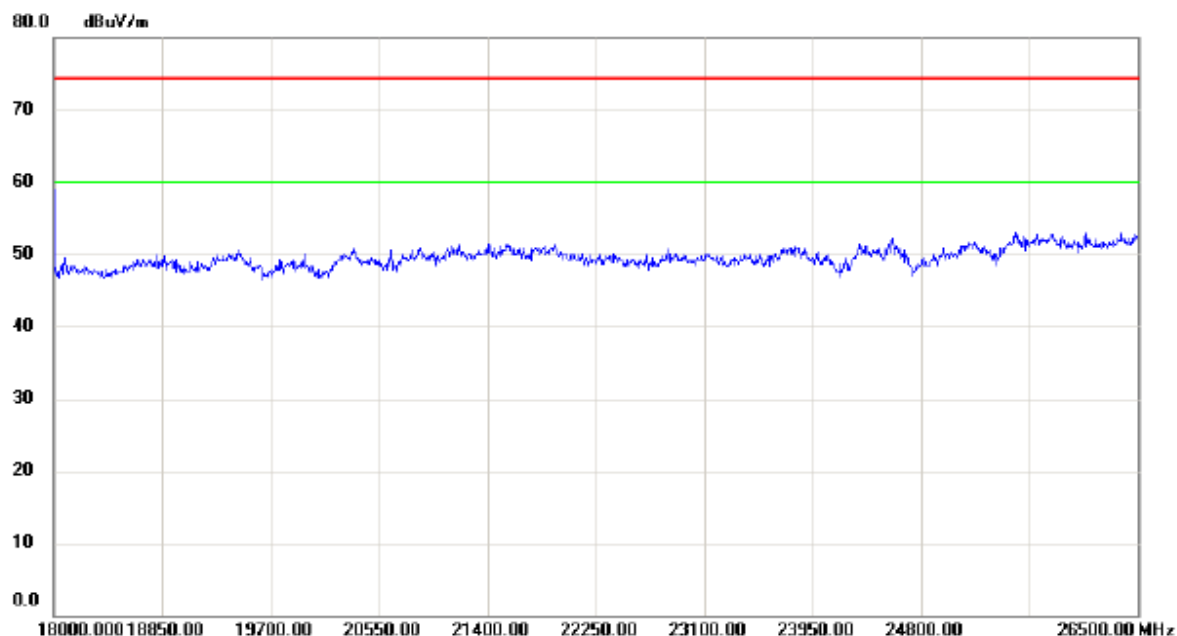


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

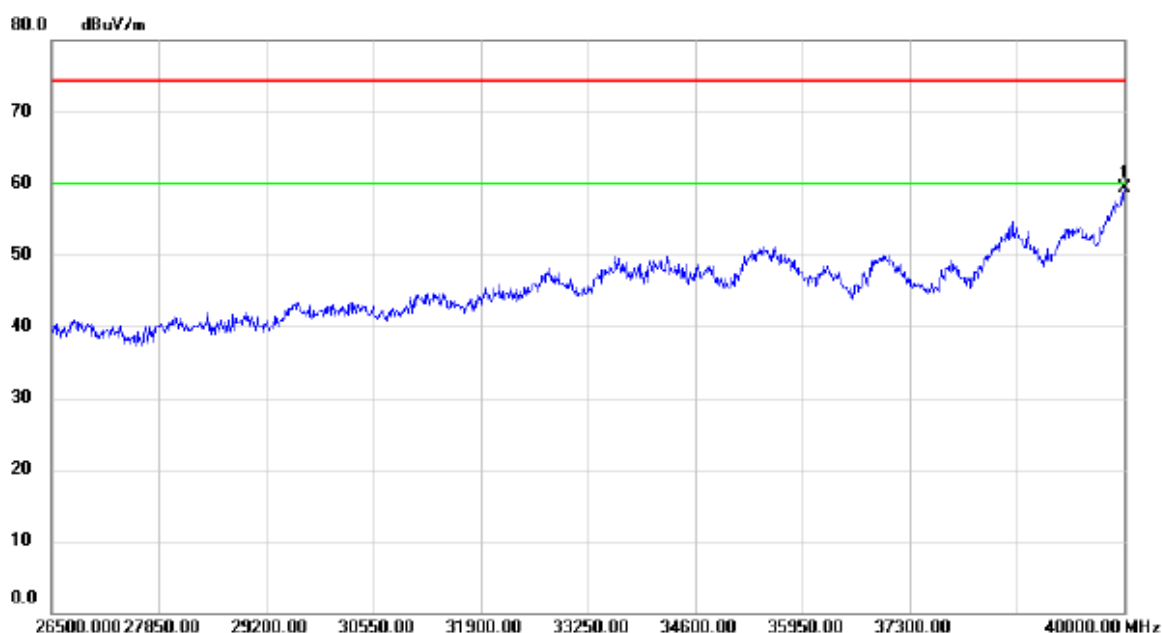

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	41.66	17.60	59.26	74.30	-15.04	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

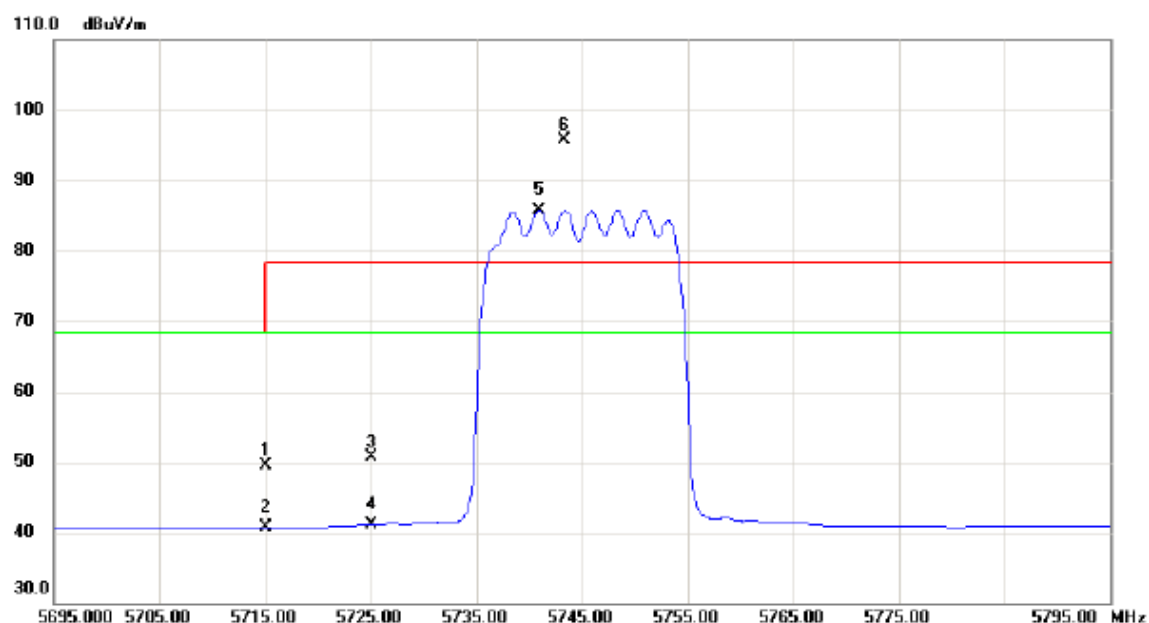


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	8.33	41.25	49.58	68.30	-18.72	peak	
2		5715.000	-0.52	41.25	40.73	68.30	-27.57	AVG	
3		5725.000	9.47	41.27	50.74	78.30	-27.56	peak	
4		5725.000	-0.22	41.27	41.05	68.30	-27.25	AVG	
5	*	5740.900	44.43	41.29	85.72	68.30	17.42	AVG	No Limit
6	X	5743.300	54.41	41.29	95.70	78.30	17.40	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

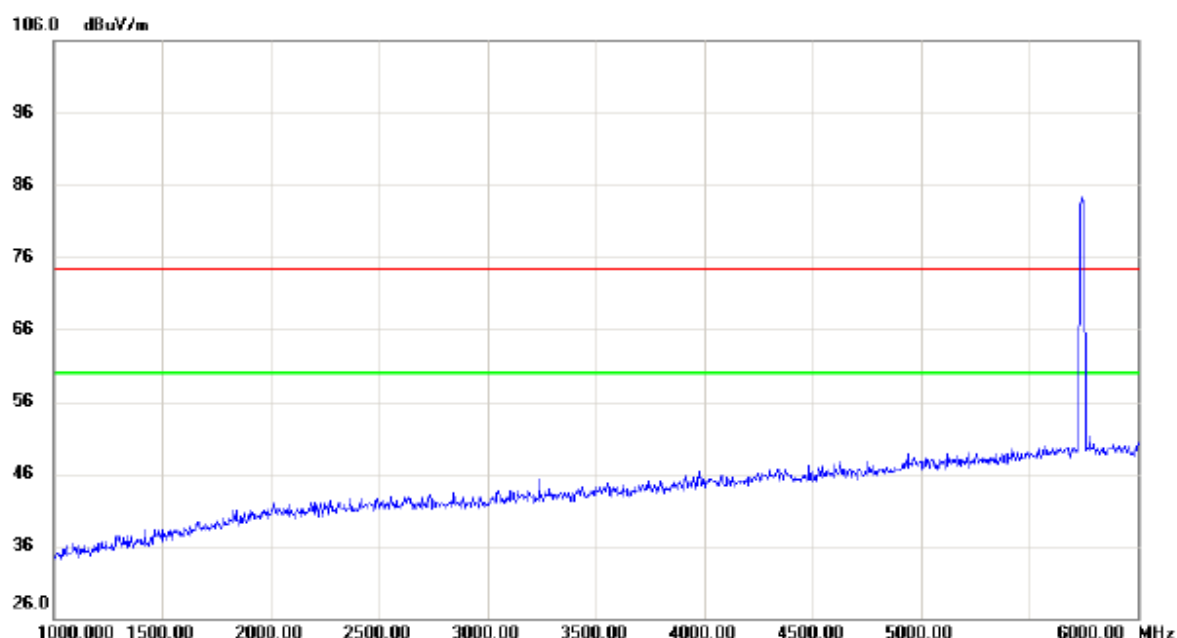


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

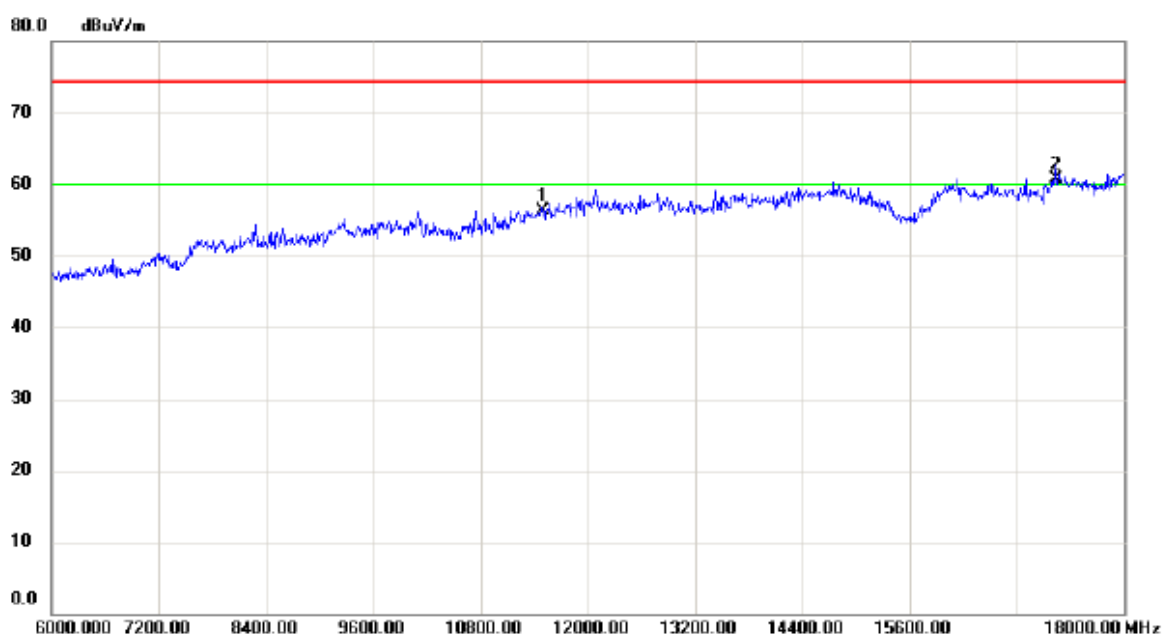


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	39.40	16.91	56.31	74.30	-17.99	peak	
2	*	17235.00	39.08	21.53	60.61	74.30	-13.69	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

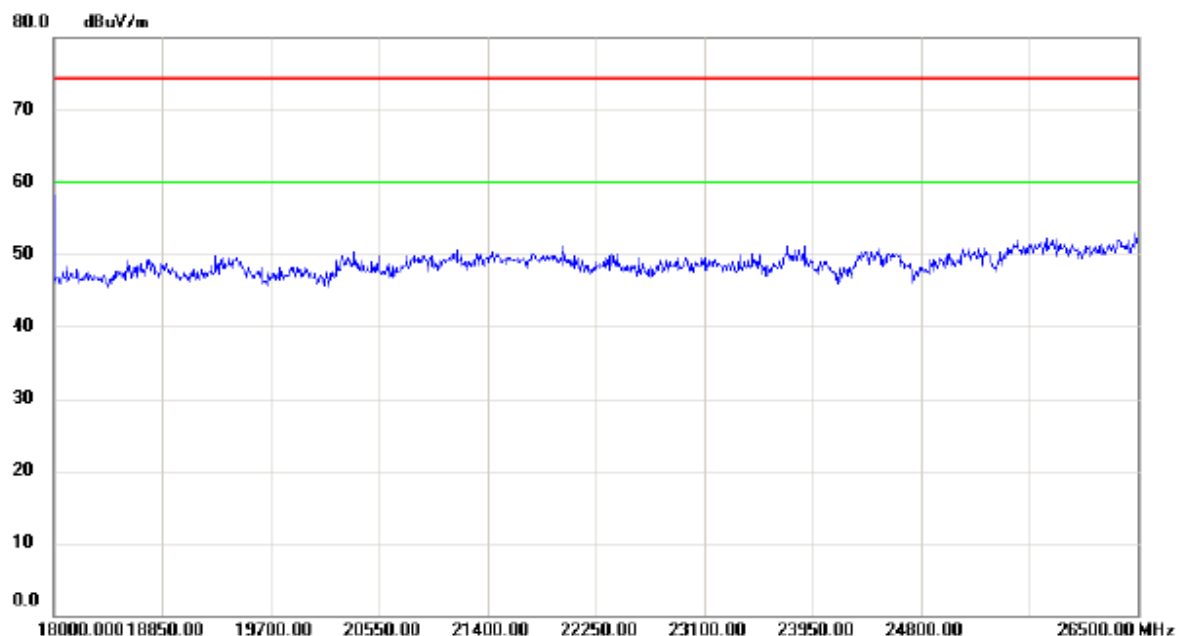


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

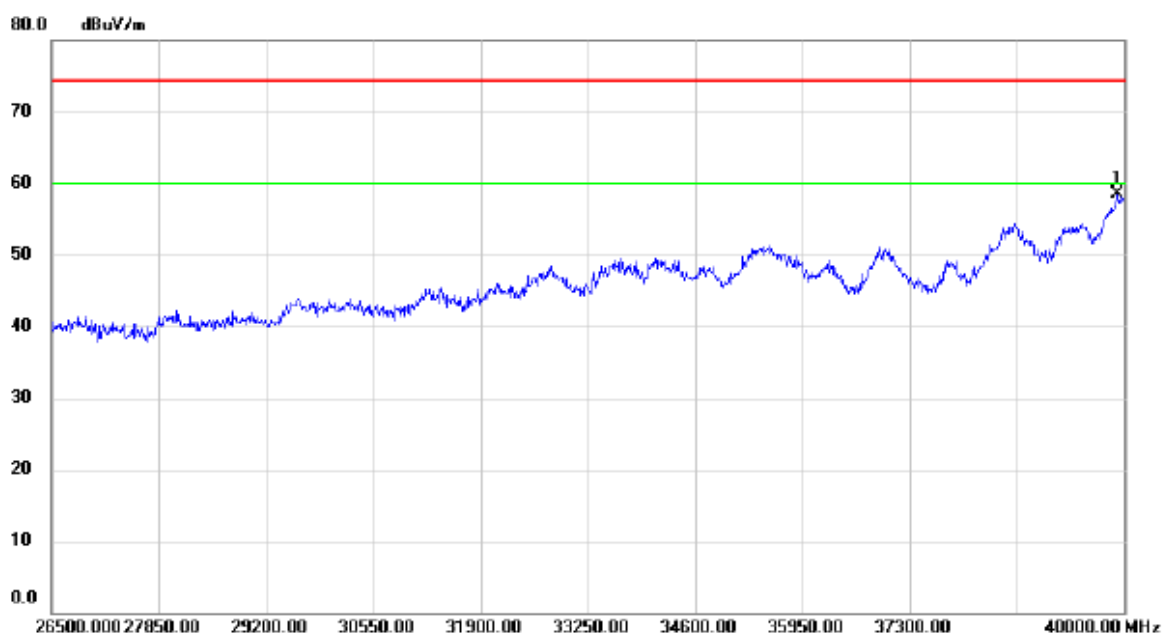

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39919.00	41.16	17.40	58.56	74.30	-15.74	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

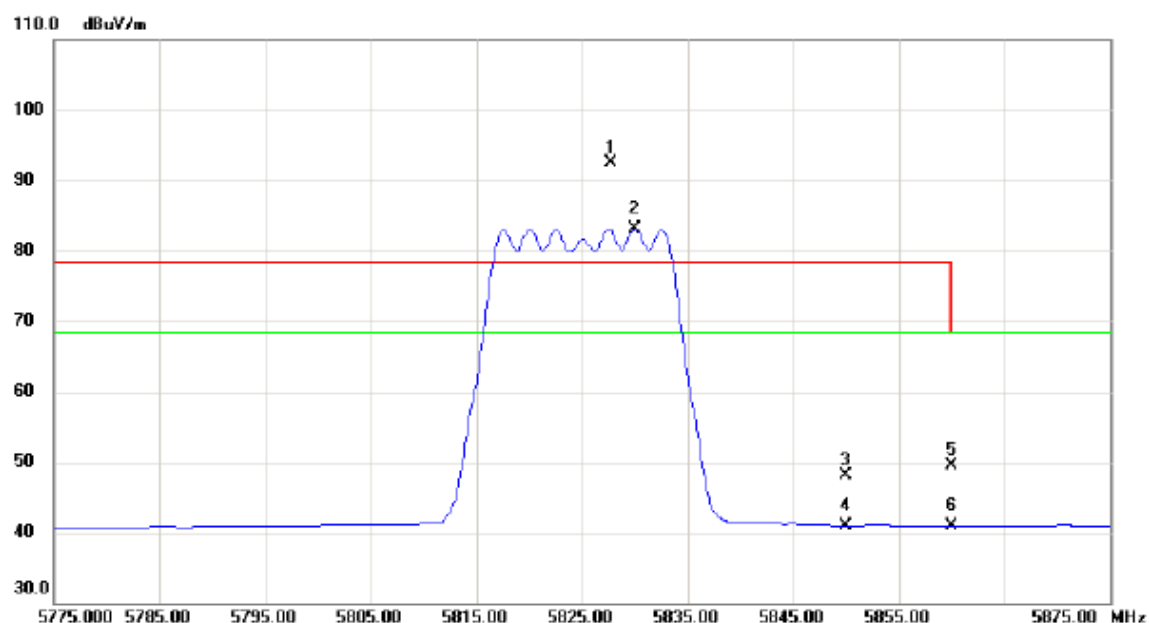


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5827.700	51.03	41.40	92.43	78.30	14.13	peak	No Limit
2	*	5830.000	41.72	41.41	83.13	68.30	14.83	AVG	No Limit
3		5850.000	6.71	41.44	48.15	78.30	-30.15	peak	
4		5850.000	-0.48	41.44	40.96	68.30	-27.34	AVG	
5		5860.000	8.04	41.45	49.49	68.30	-18.81	peak	
6		5860.000	-0.49	41.45	40.96	68.30	-27.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical

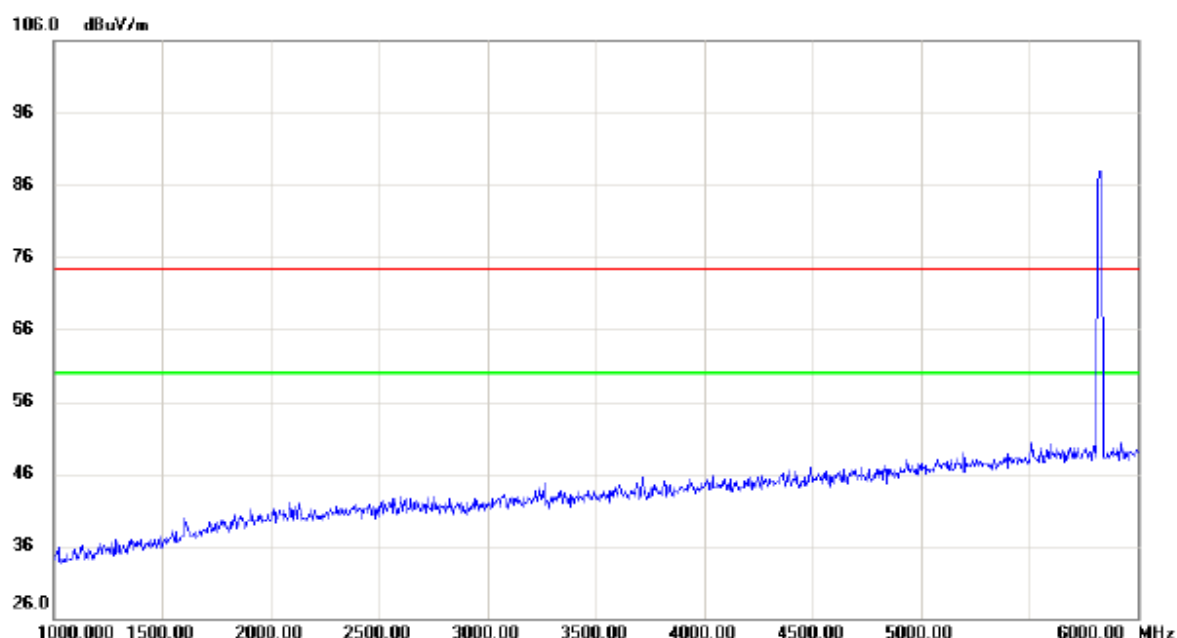


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

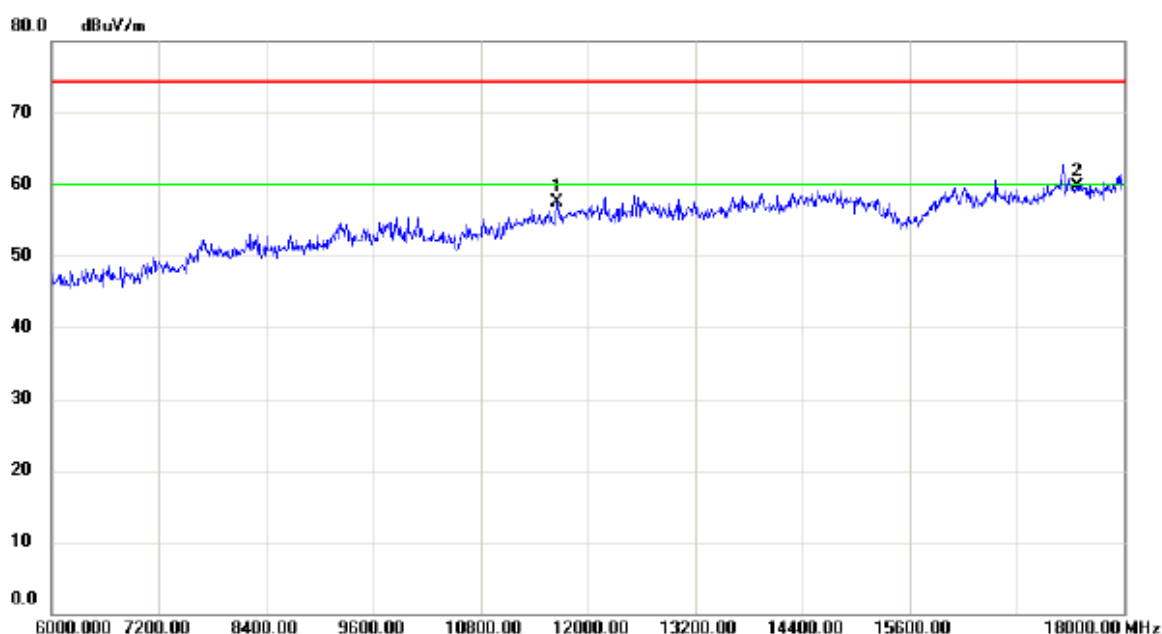


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	40.33	17.17	57.50	74.30	-16.80	peak	
2	*	17475.00	37.41	22.29	59.70	74.30	-14.60	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical

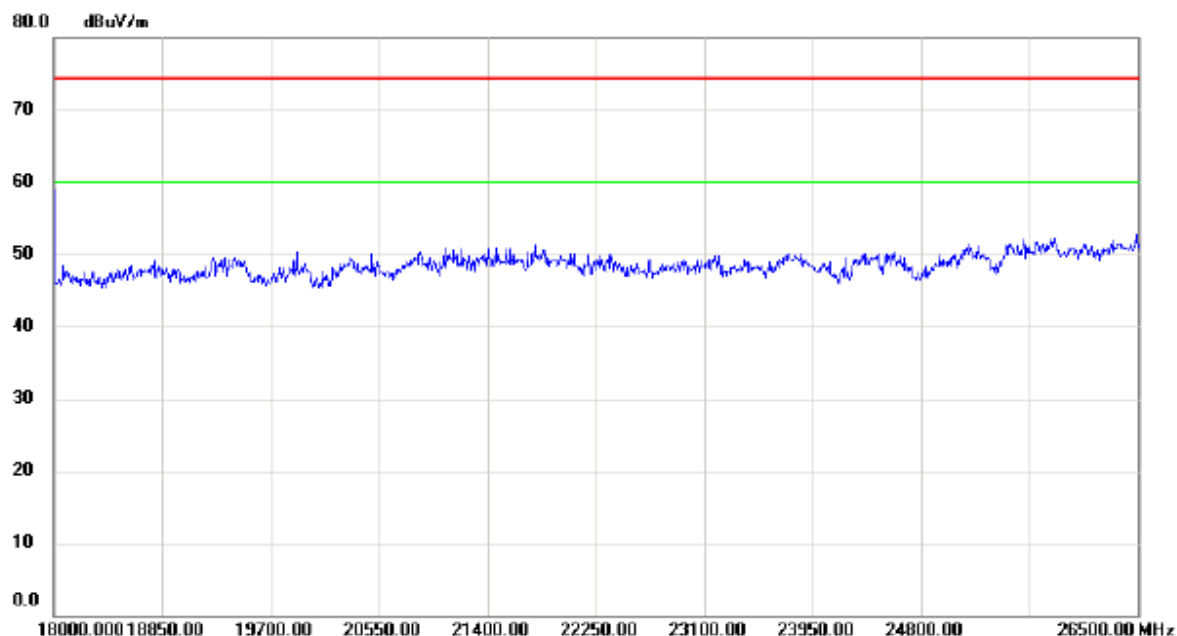


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

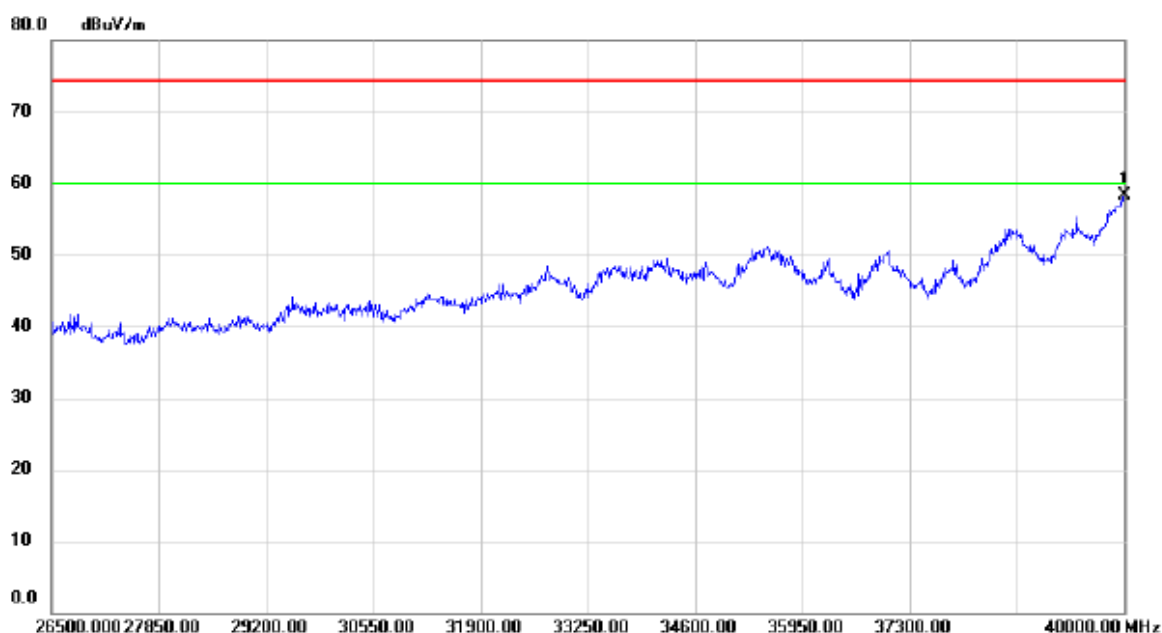

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	40.79	17.60	58.39	74.30	-15.91	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

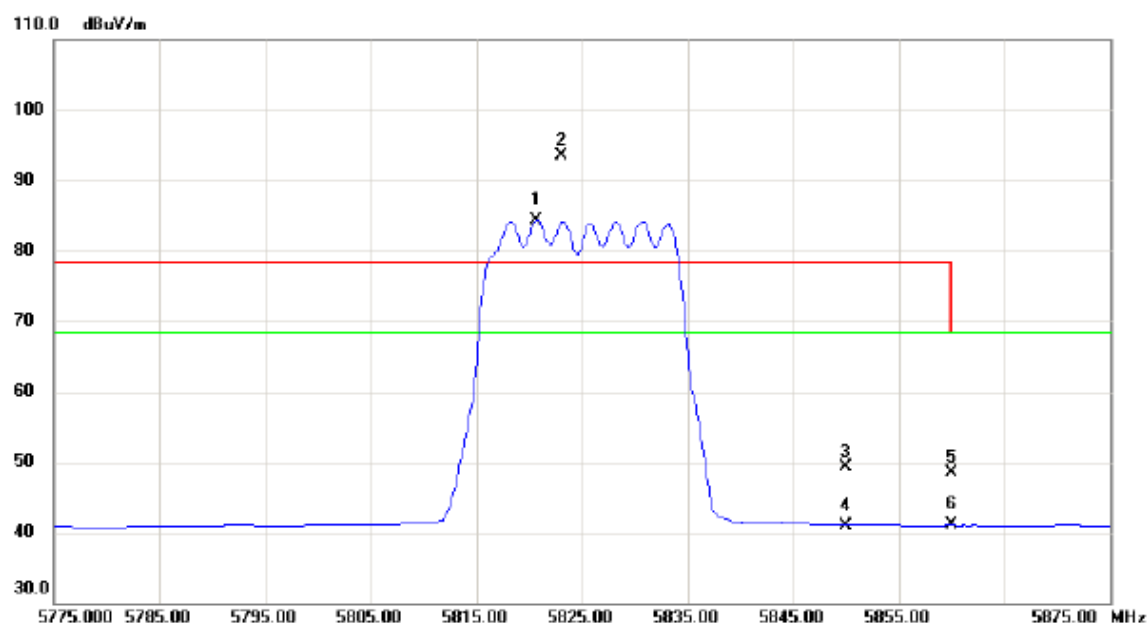


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.700	42.89	41.39	84.28	68.30	15.98	AVG	No Limit
2	X	5823.000	52.17	41.40	93.57	78.30	15.27	peak	No Limit
3		5850.000	7.83	41.44	49.27	78.30	-29.03	peak	
4		5850.000	-0.44	41.44	41.00	68.30	-27.30	AVG	
5		5860.000	7.04	41.45	48.49	68.30	-19.81	peak	
6		5860.000	-0.44	41.45	41.01	68.30	-27.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal

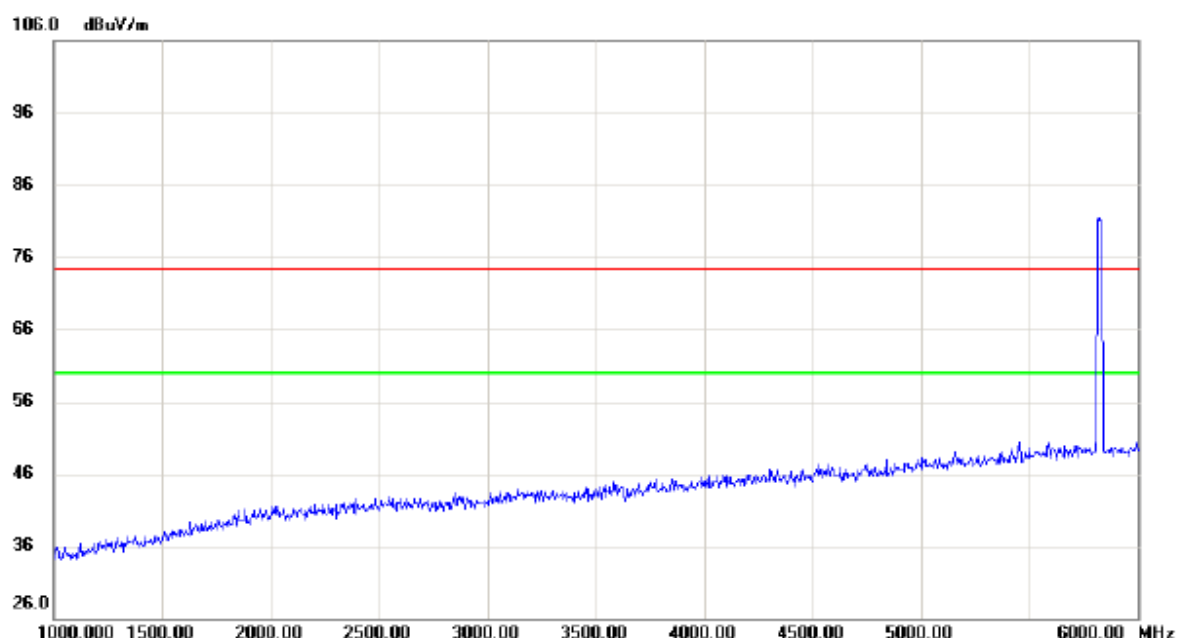


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

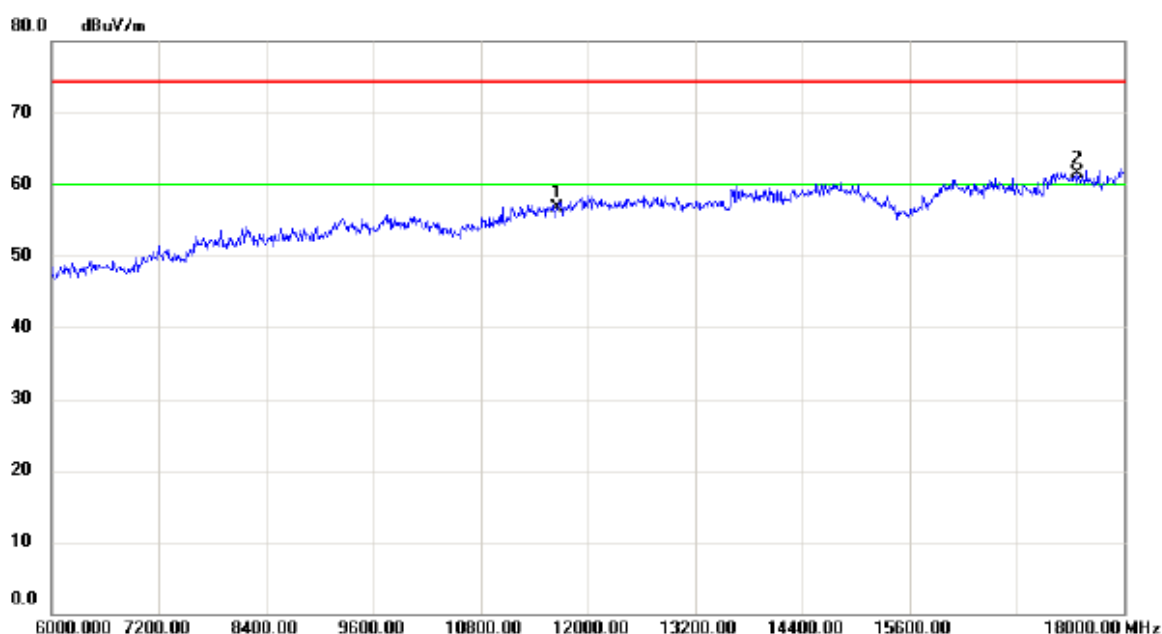


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	39.61	17.17	56.78	74.30	-17.52	peak	
2	*	17475.00	39.25	22.29	61.54	74.30	-12.76	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal

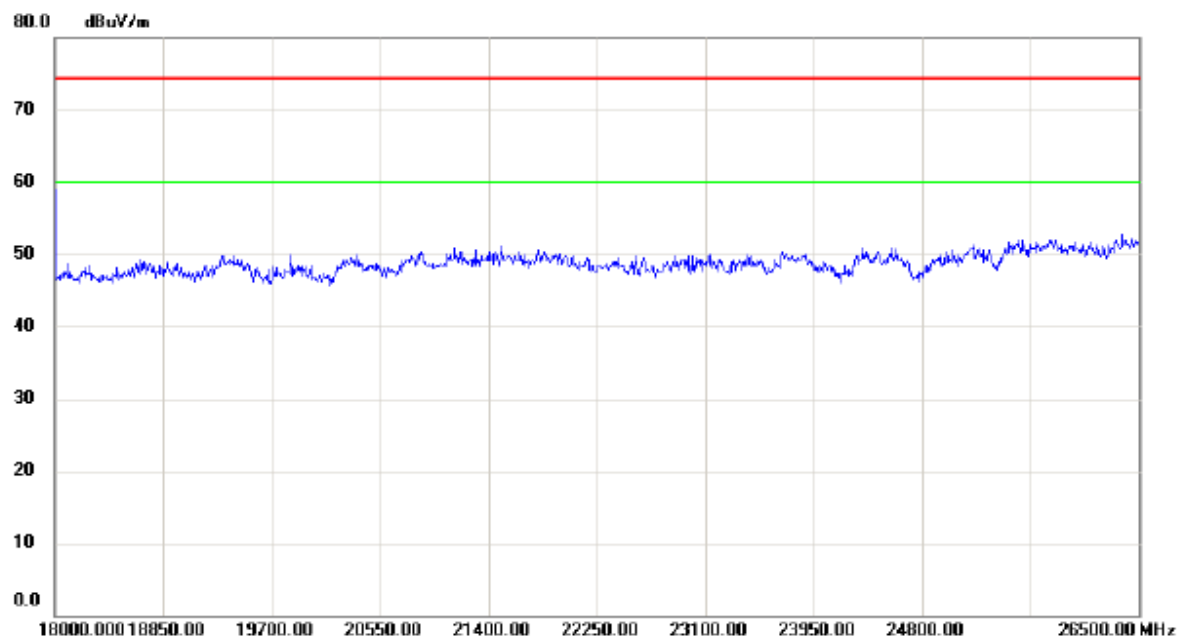


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

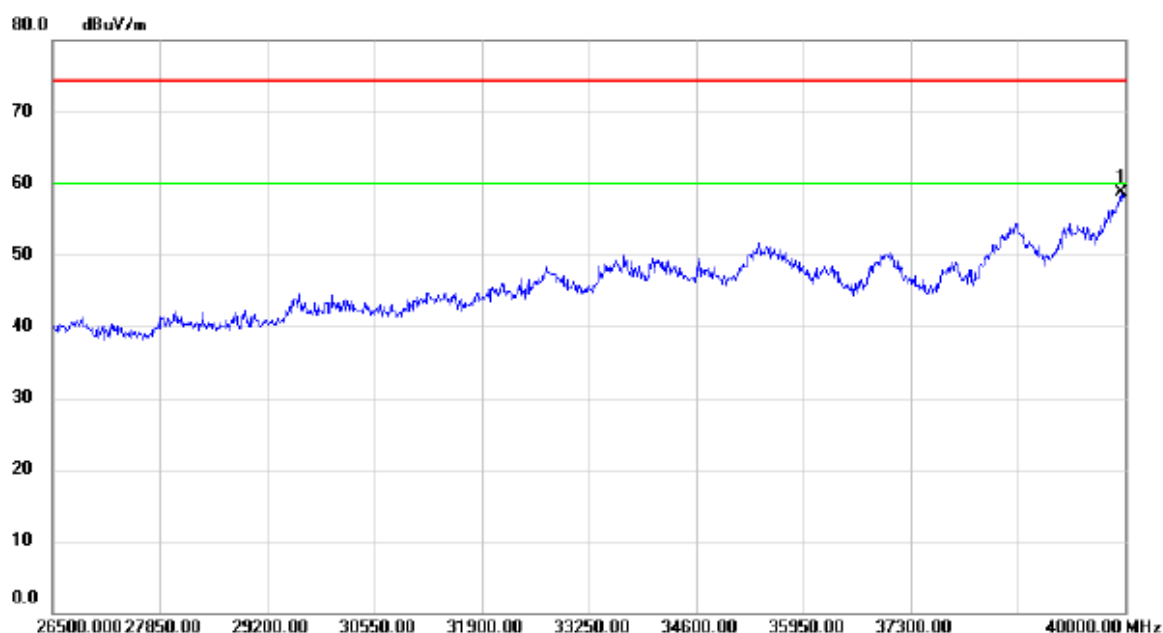

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	41.19	17.47	58.66	74.30	-15.64	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

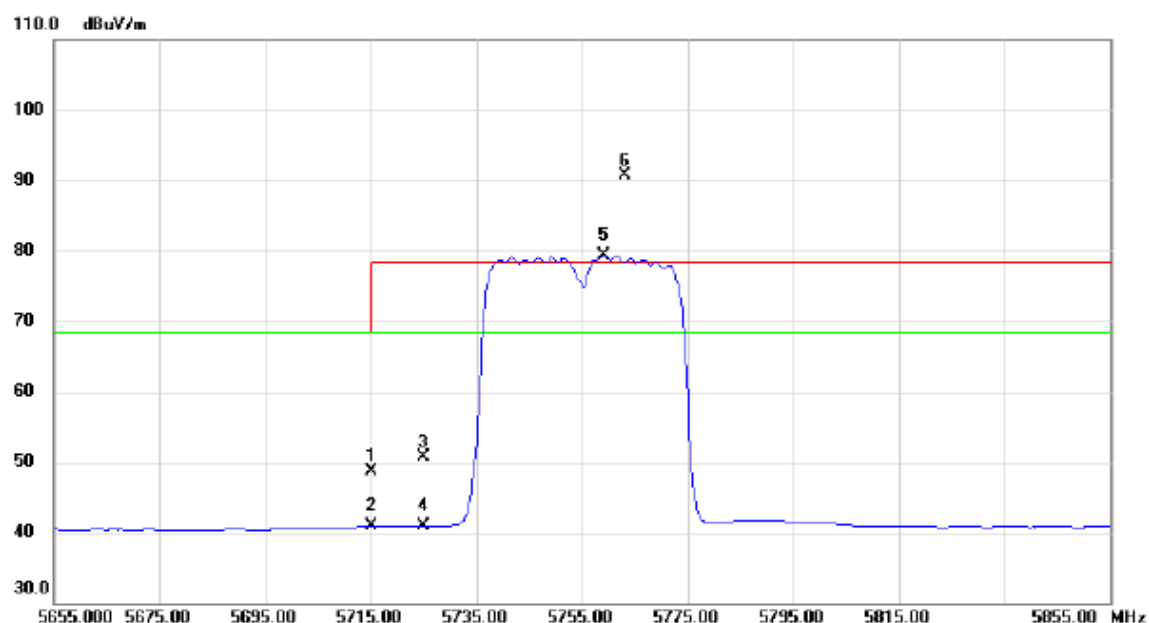


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	7.43	41.25	48.68	68.30	-19.62	peak	
2		5715.000	-0.34	41.25	40.91	68.30	-27.39	AVG	
3		5725.000	9.48	41.27	50.75	78.30	-27.55	peak	
4		5725.000	-0.30	41.27	40.97	68.30	-27.33	AVG	
5	X	5759.200	38.02	41.31	79.33	68.30	11.03	AVG	No Limit
6	*	5763.000	49.32	41.32	90.64	78.30	12.34	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical

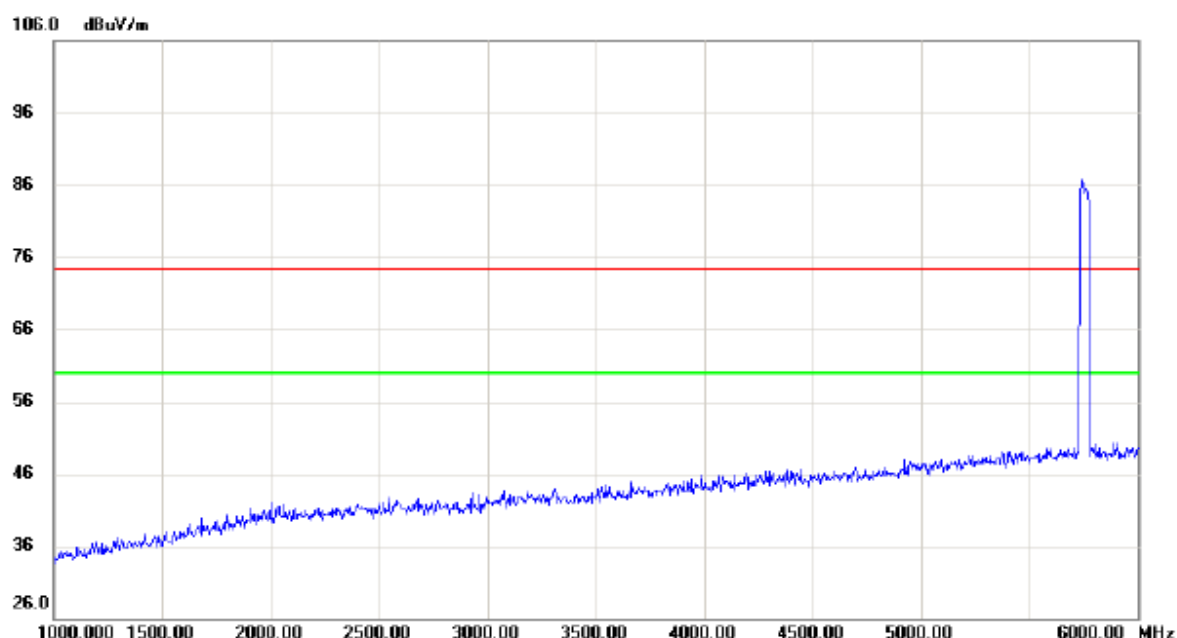


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

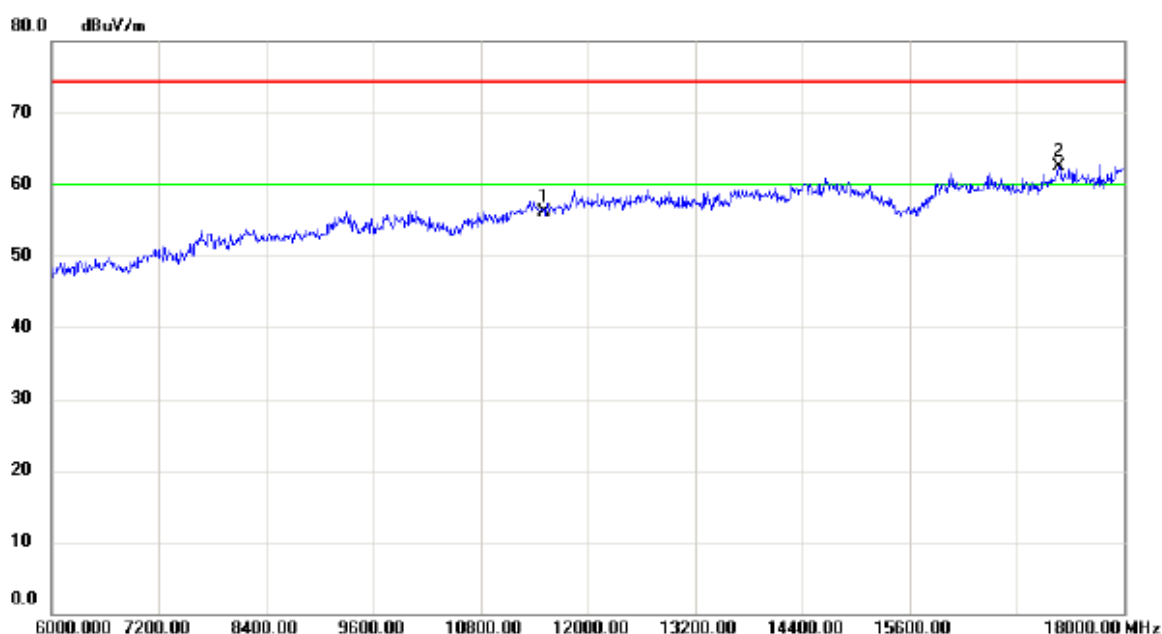


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	39.07	16.96	56.03	74.30	-18.27	peak	
2	*	17265.00	40.95	21.62	62.57	74.30	-11.73	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical

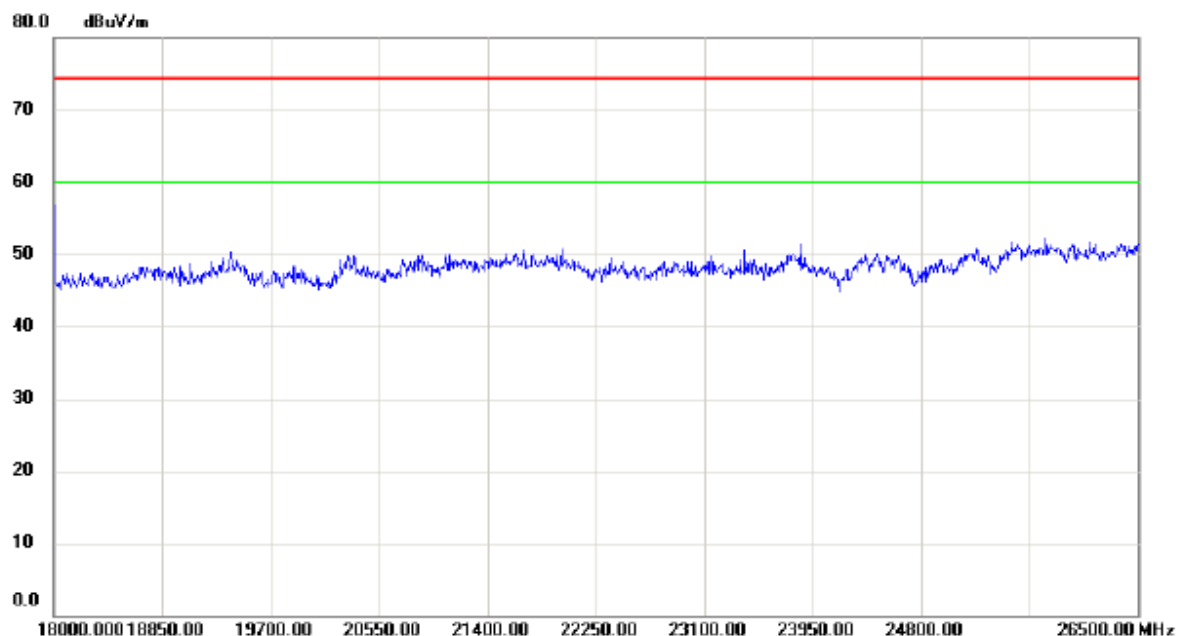


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

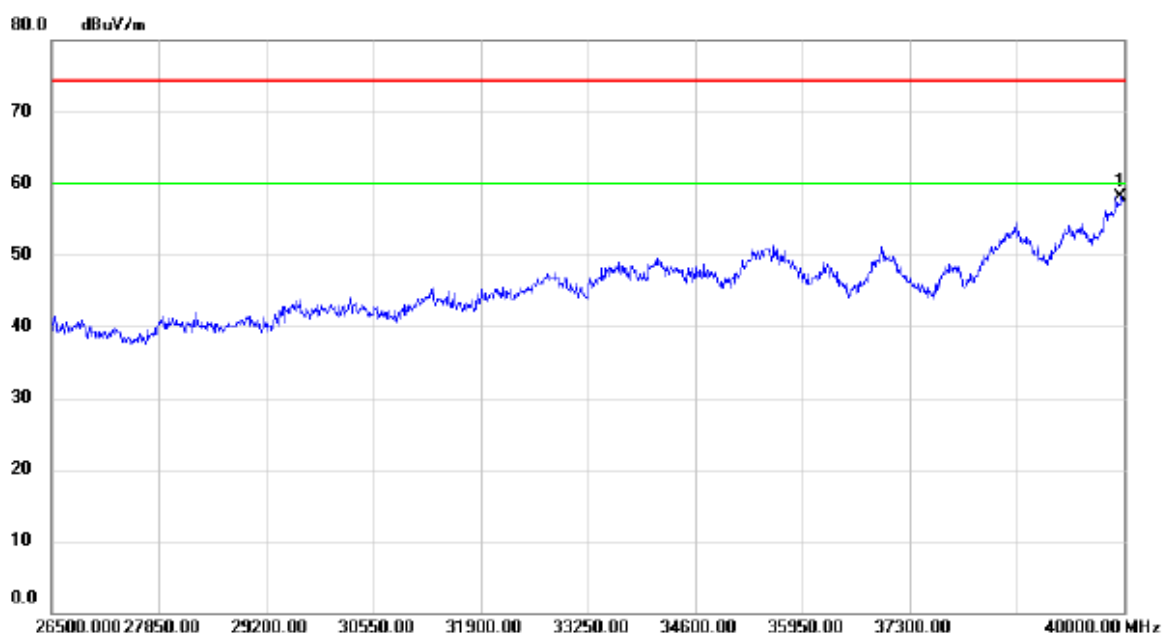

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	40.67	17.50	58.17	74.30	-16.13	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

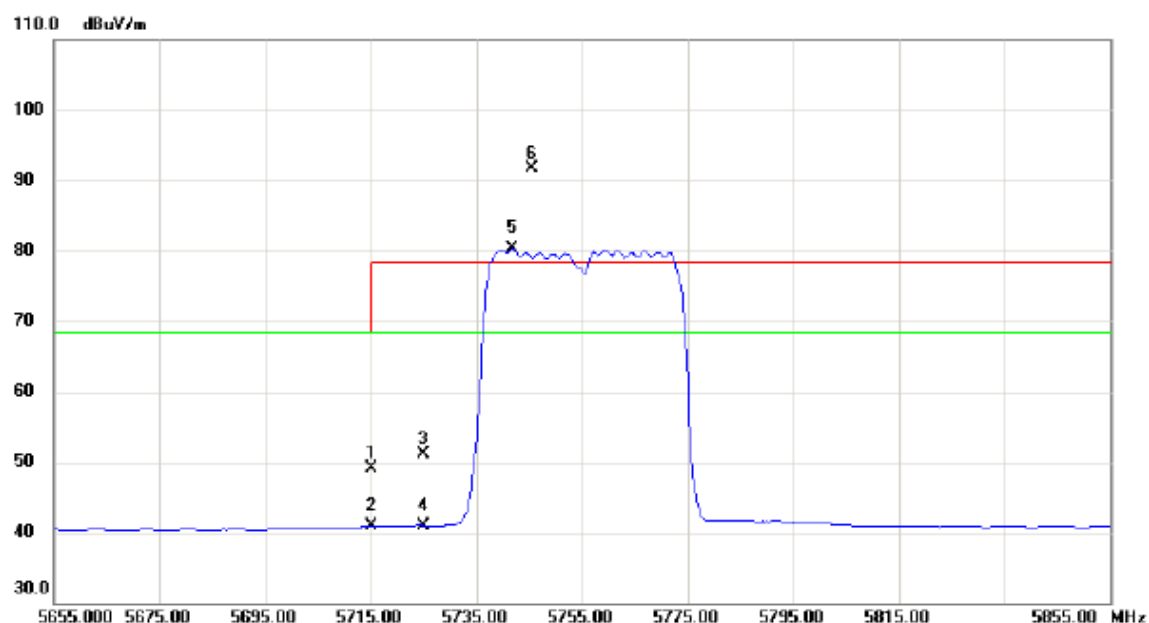


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	7.87	41.25	49.12	68.30	-19.18	peak	
2		5715.000	-0.36	41.25	40.89	68.30	-27.41	AVG	
3		5725.000	9.85	41.27	51.12	78.30	-27.18	peak	
4		5725.000	-0.28	41.27	40.99	68.30	-27.31	AVG	
5	X	5741.800	38.96	41.29	80.25	68.30	11.95	AVG	No Limit
6	*	5745.600	50.48	41.29	91.77	78.30	13.47	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal

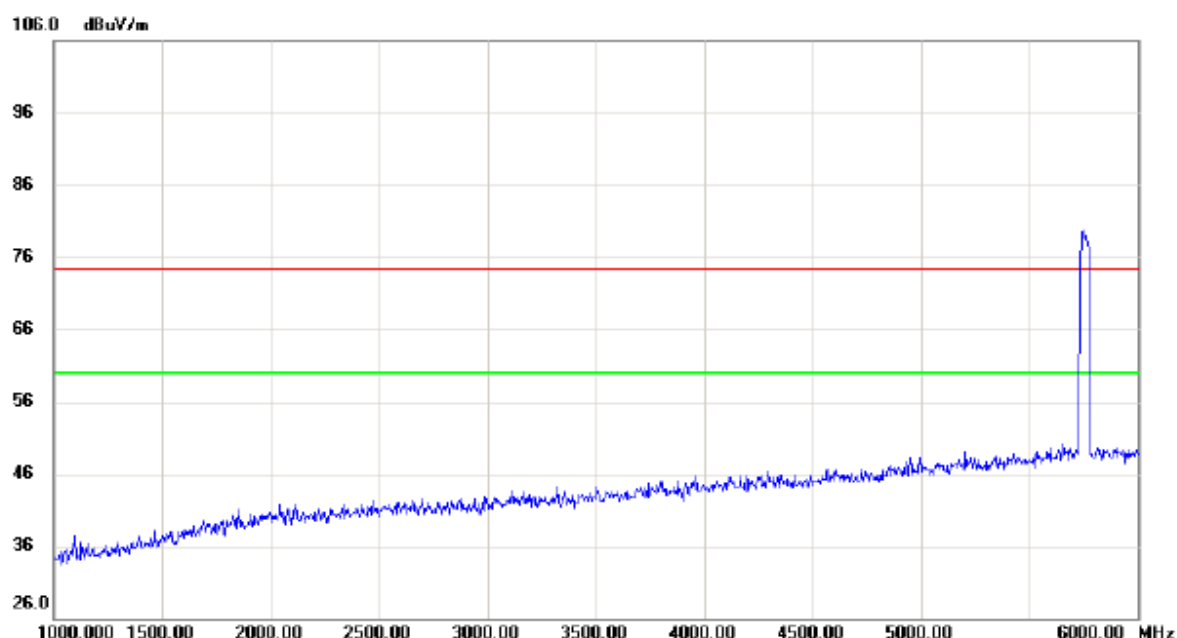


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

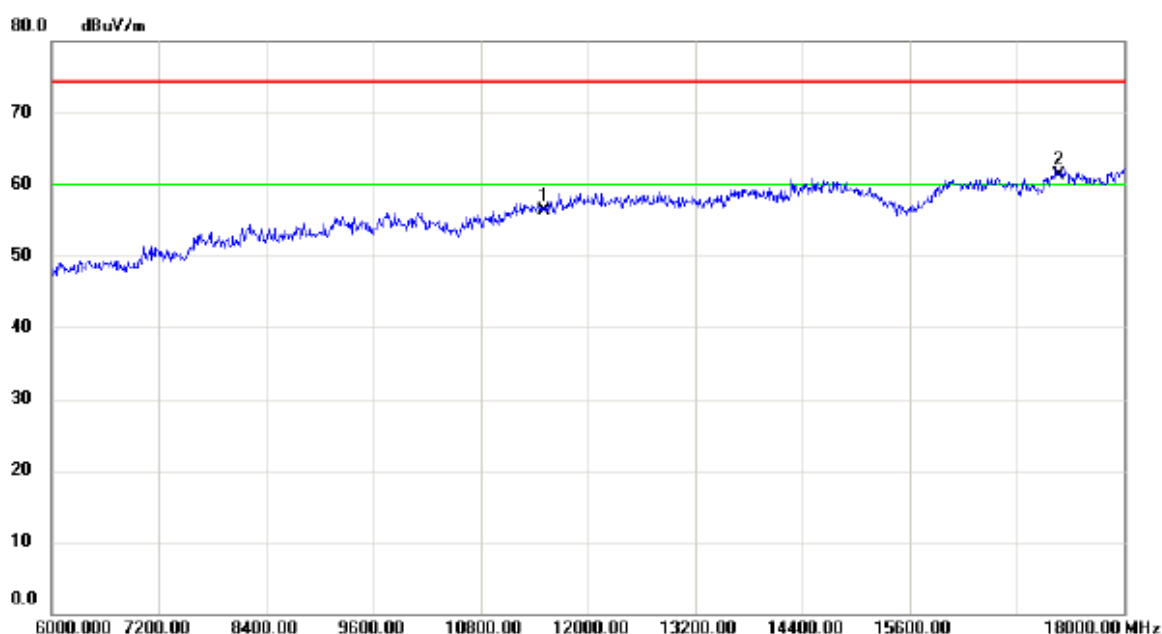


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	39.44	16.96	56.40	74.30	-17.90	peak	
2	*	17265.00	39.65	21.62	61.27	74.30	-13.03	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal

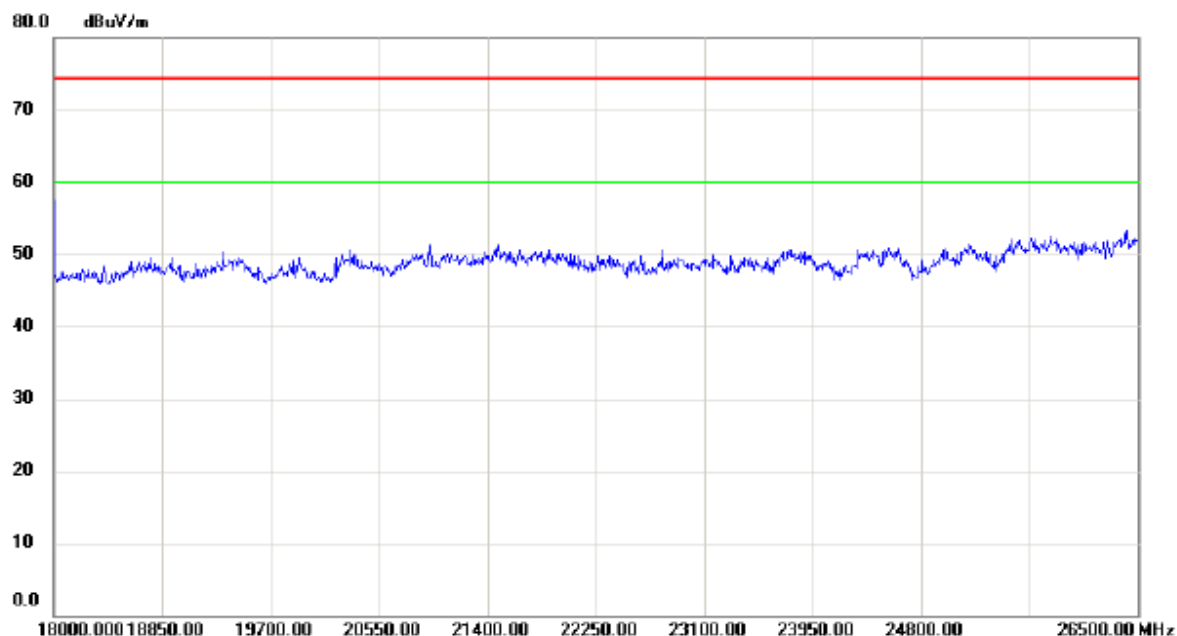


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

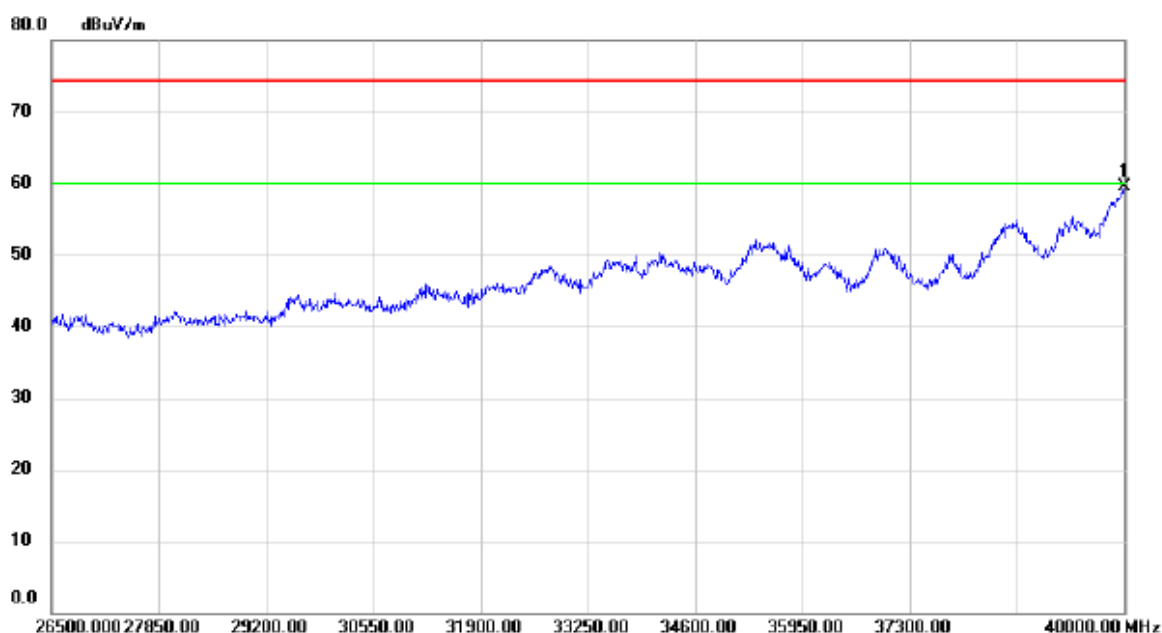

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	41.85	17.60	59.45	74.30	-14.85	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

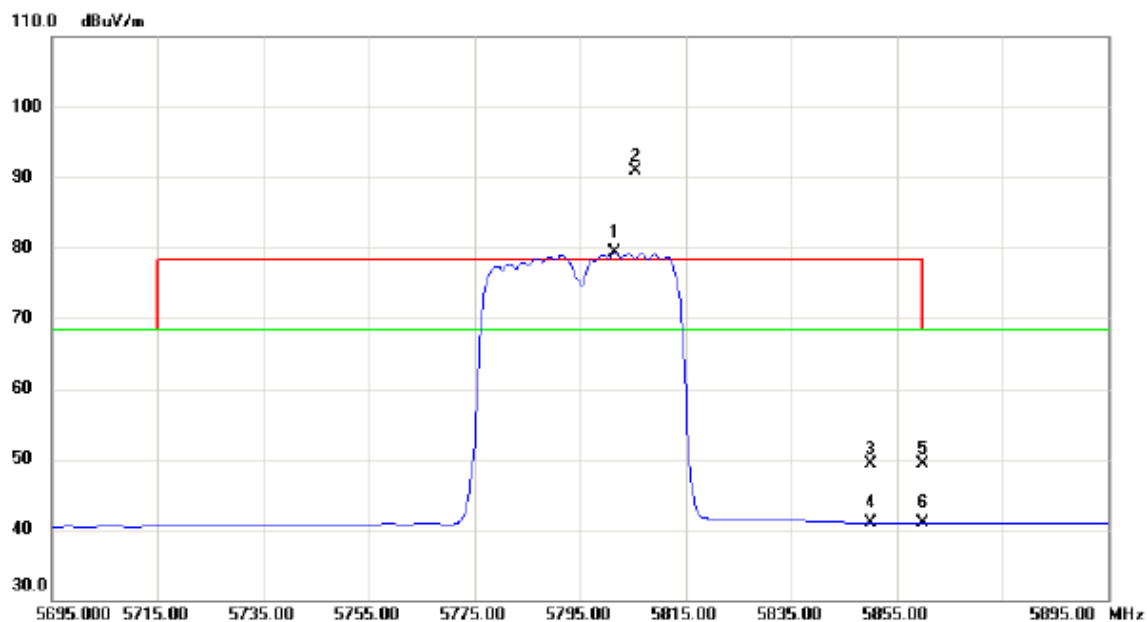


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5801.600	37.86	41.37	79.23	68.30	10.93	AVG	No Limit
2	*	5805.600	49.53	41.38	90.91	78.30	12.61	peak	No Limit
3		5850.000	7.92	41.44	49.36	78.30	-28.94	peak	
4		5850.000	-0.57	41.44	40.87	68.30	-27.43	AVG	
5		5860.000	7.82	41.45	49.27	68.30	-19.03	peak	
6		5860.000	-0.55	41.45	40.90	68.30	-27.40	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical

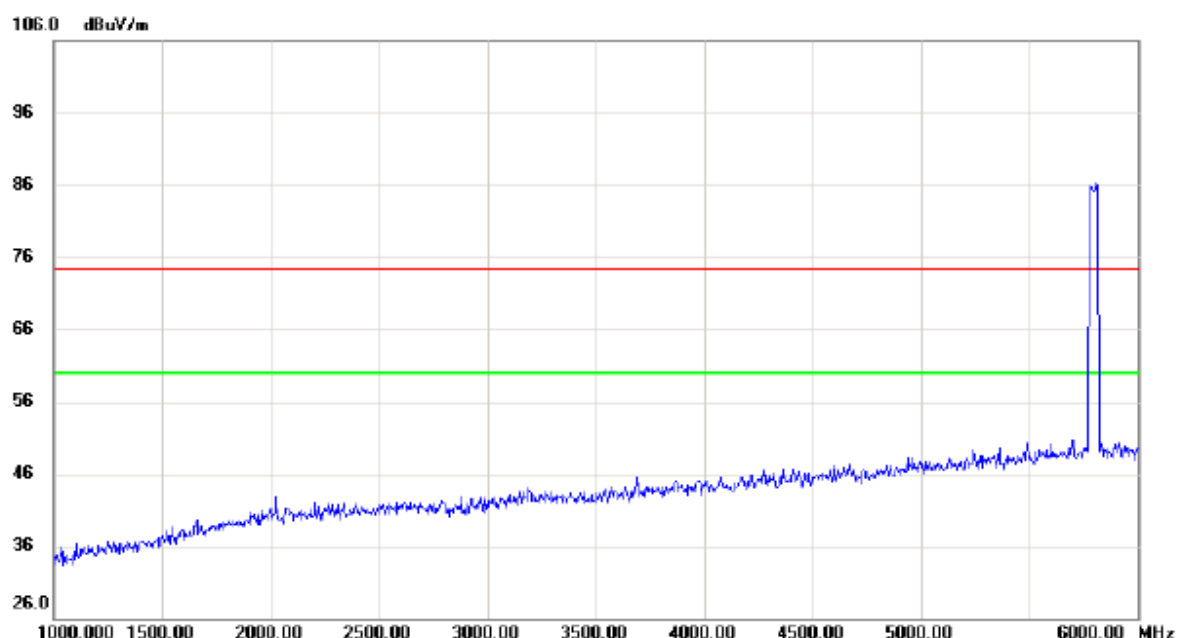


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

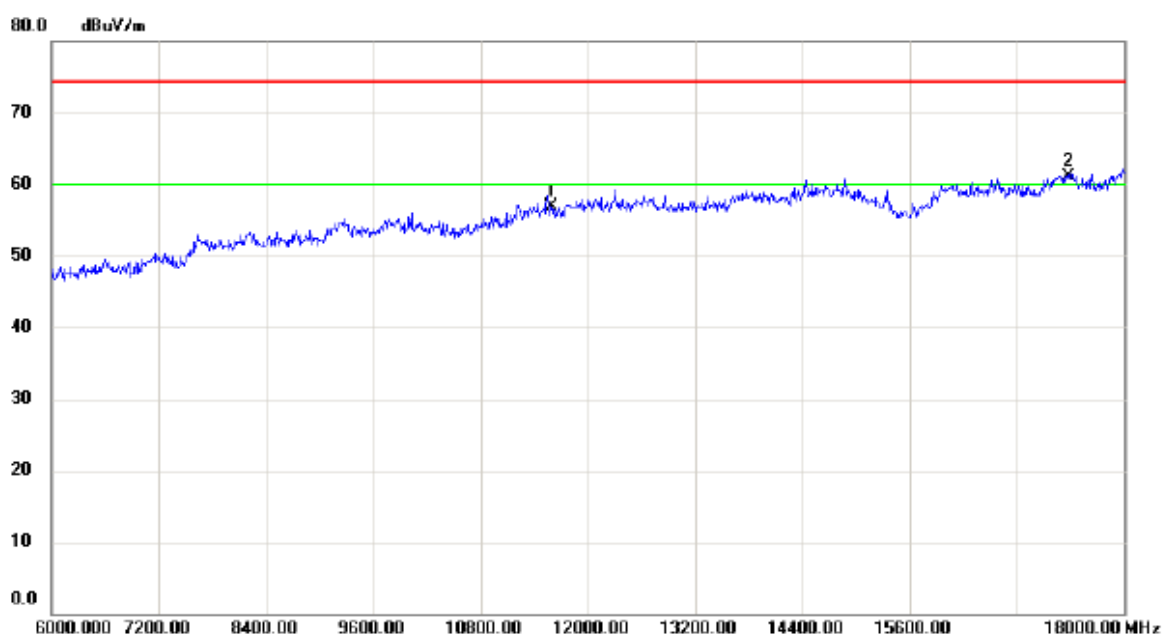


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	39.74	17.08	56.82	74.30	-17.48	peak	
2	*	17385.00	39.01	22.00	61.01	74.30	-13.29	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical

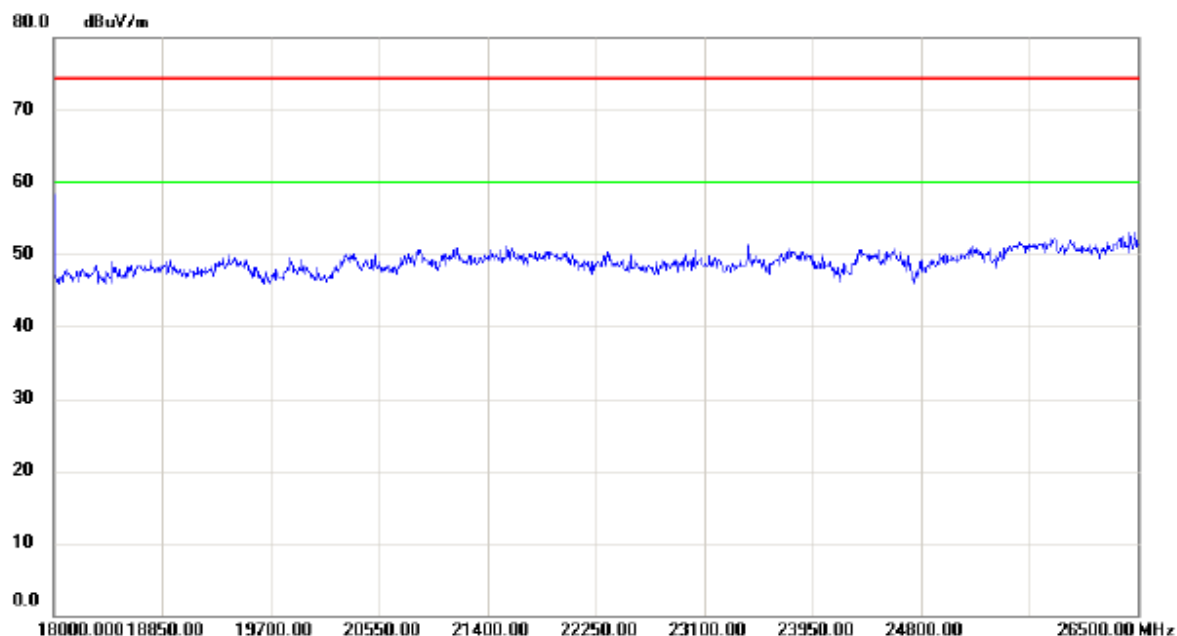


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

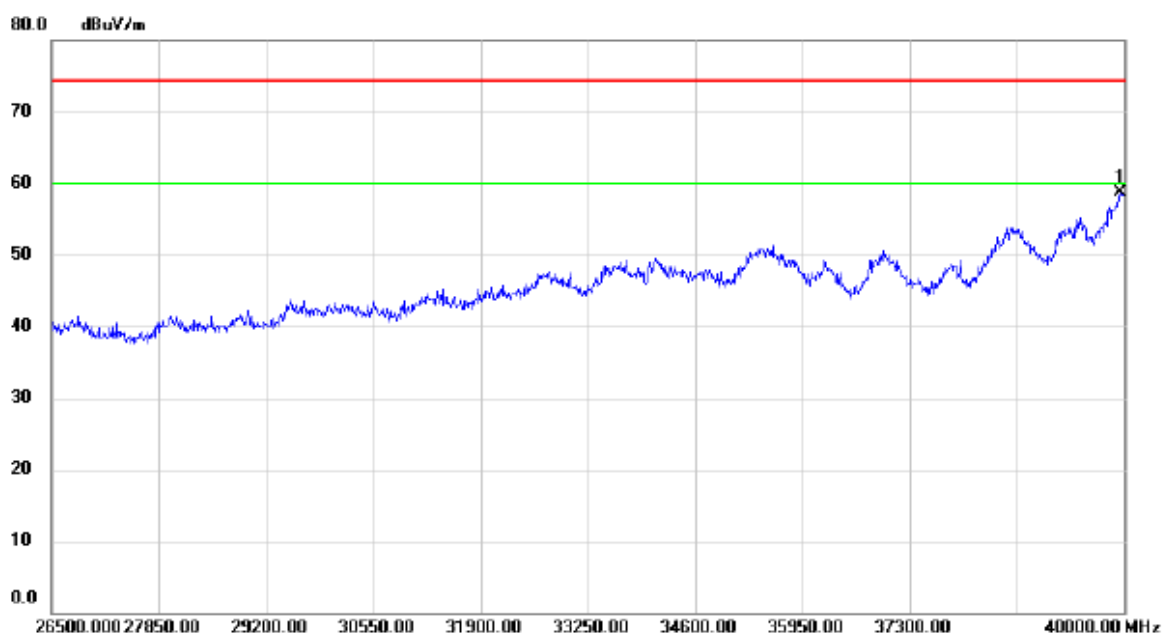

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	41.16	17.47	58.63	74.30	-15.67	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

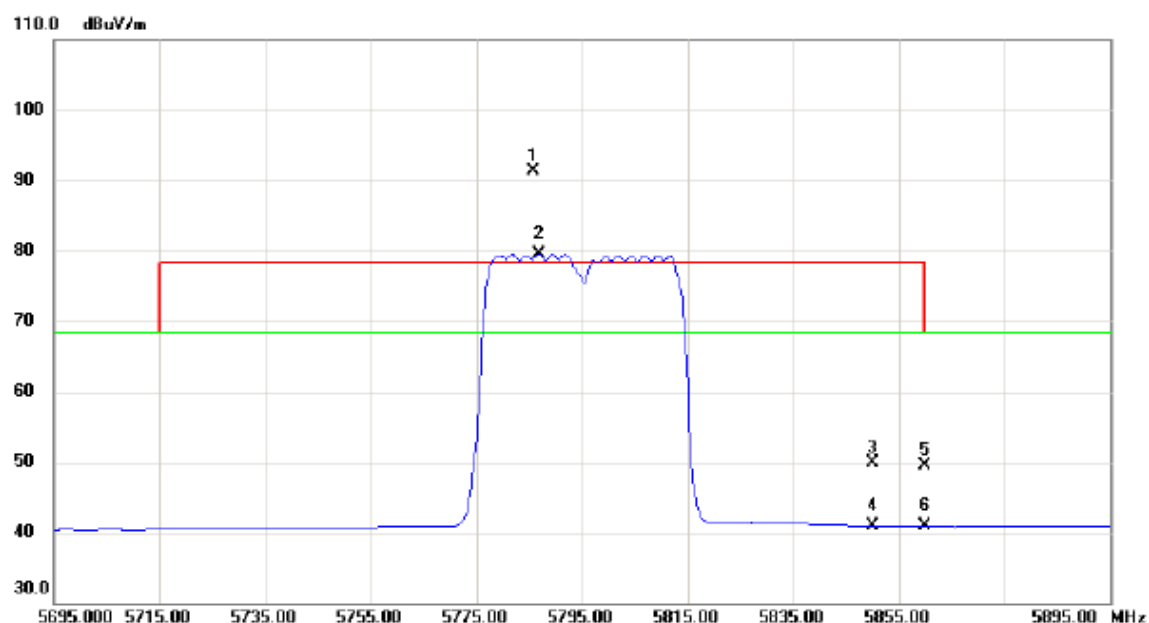


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5785.800	50.00	41.35	91.35	78.30	13.05	peak	No Limit
2	X	5786.800	38.17	41.35	79.52	68.30	11.22	AVG	No Limit
3		5850.000	8.55	41.44	49.99	78.30	-28.31	peak	
4		5850.000	-0.56	41.44	40.88	68.30	-27.42	AVG	
5		5860.000	8.04	41.45	49.49	68.30	-18.81	peak	
6		5860.000	-0.55	41.45	40.90	68.30	-27.40	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

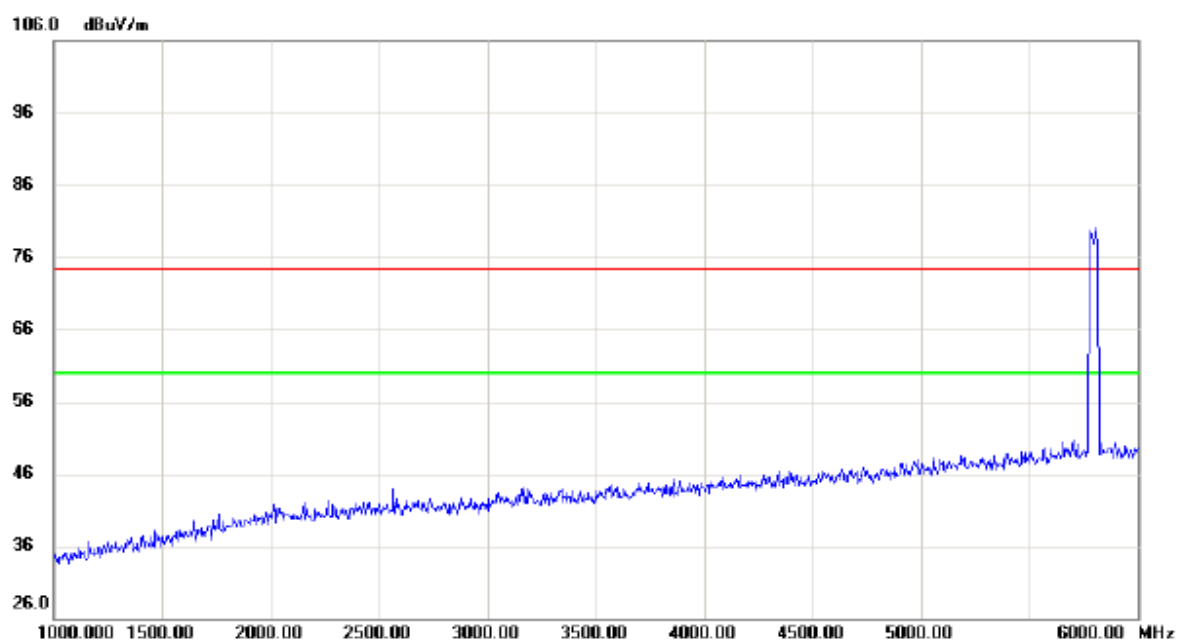


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

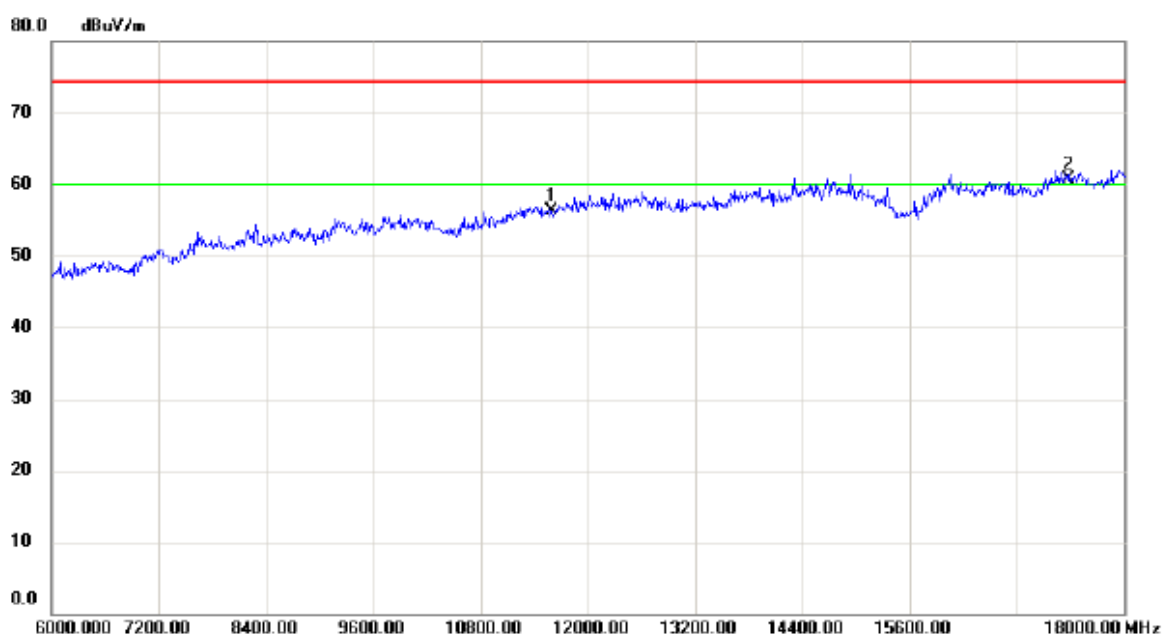


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	39.25	17.08	56.33	74.30	-17.97	peak	
2	*	17385.00	38.74	22.00	60.74	74.30	-13.56	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

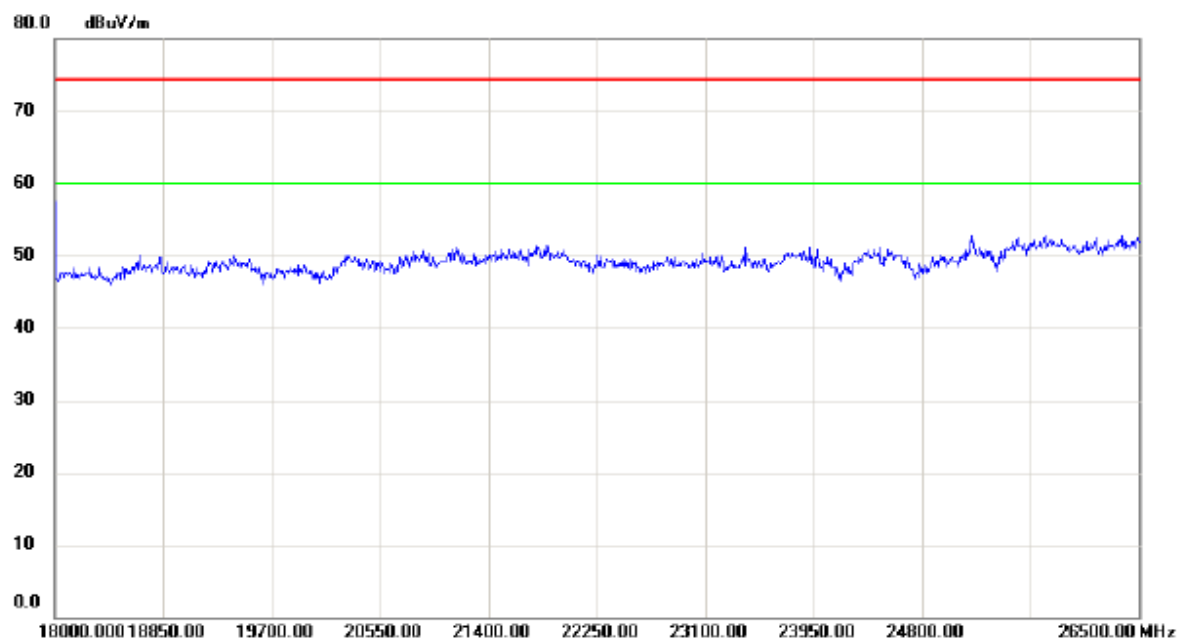


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

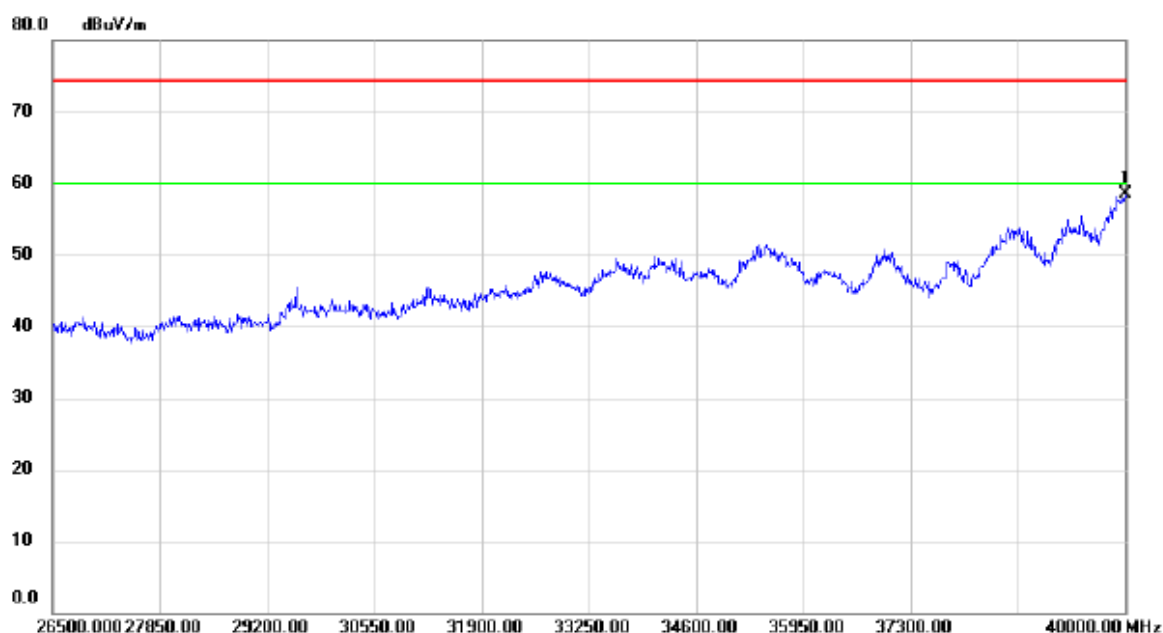

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	40.93	17.60	58.53	74.30	-15.77	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5745MHz


Vertical

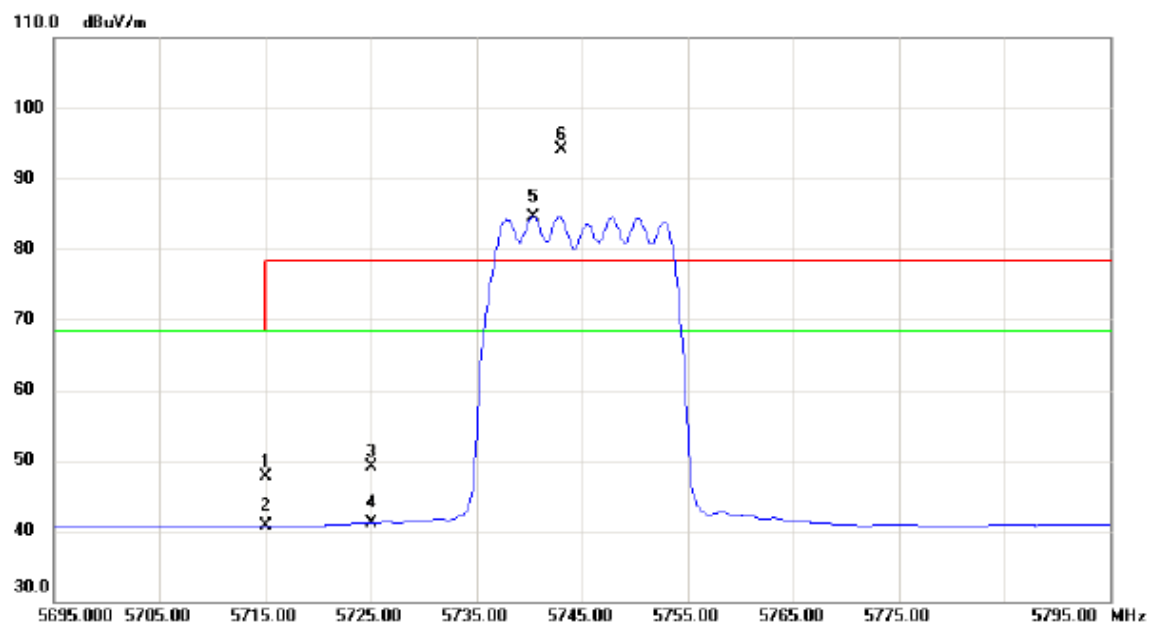


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	6.41	41.25	47.66	68.30	-20.64	peak	
2		5715.000	-0.57	41.25	40.68	68.30	-27.62	AVG	
3		5725.000	7.75	41.27	49.02	78.30	-29.28	peak	
4		5725.000	-0.26	41.27	41.01	68.30	-27.29	AVG	
5	*	5740.400	43.26	41.28	84.54	68.30	16.24	AVG	No Limit
6	X	5743.100	52.90	41.29	94.19	78.30	15.89	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5745MHz

Vertical

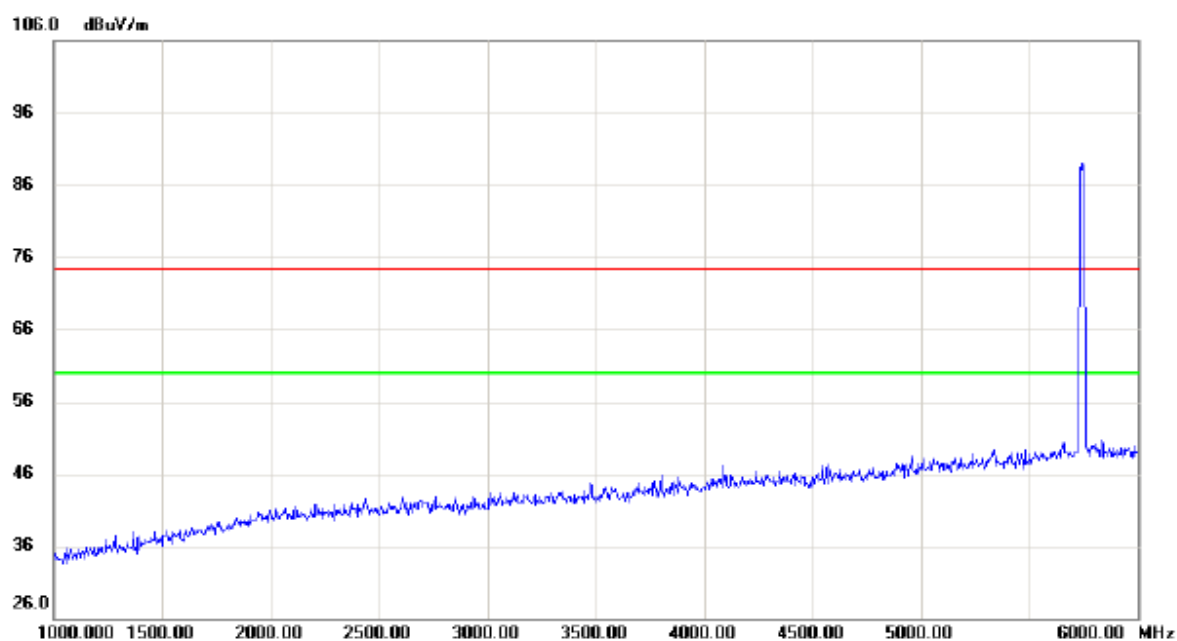


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

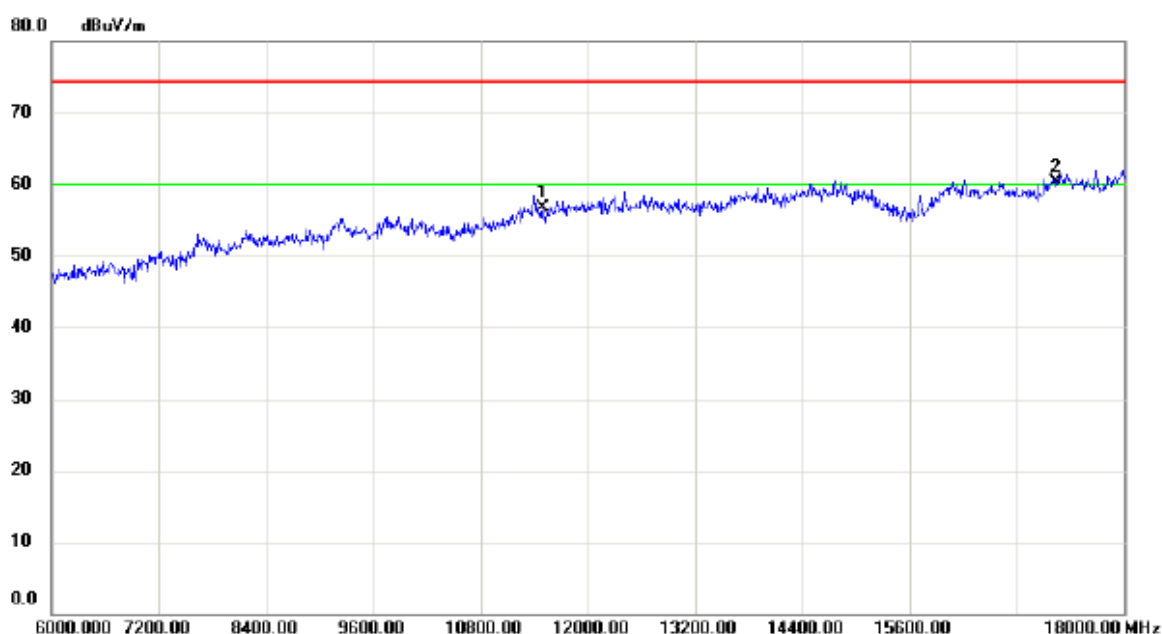


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	39.71	16.91	56.62	74.30	-17.68	peak	
2	*	17235.00	38.82	21.53	60.35	74.30	-13.95	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5745MHz

Vertical

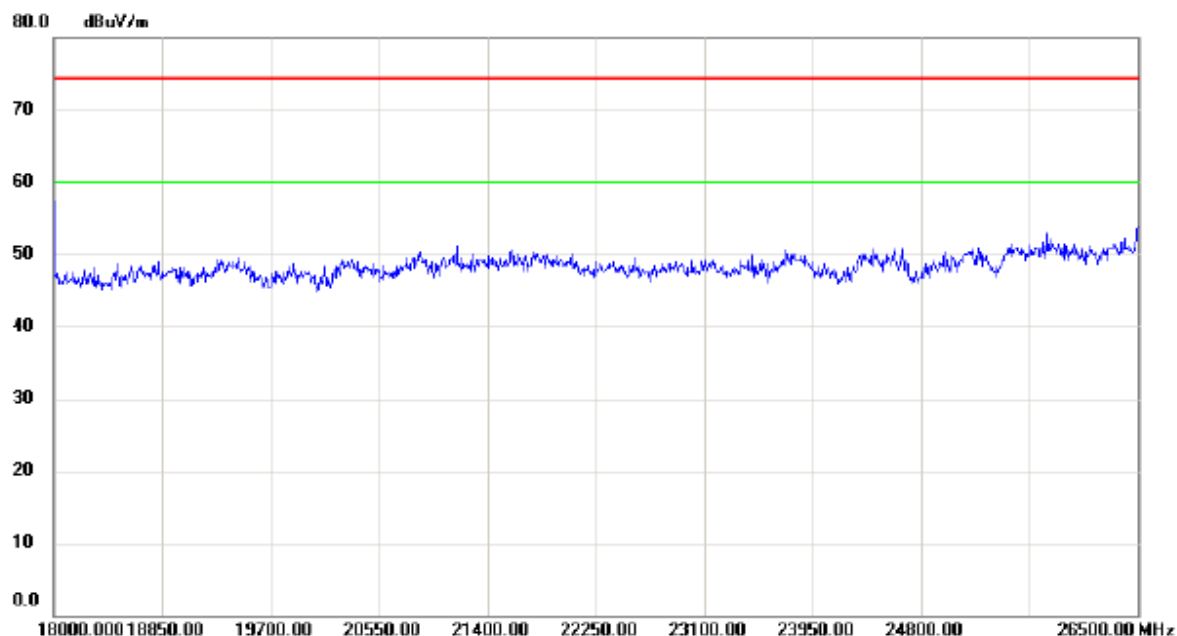


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

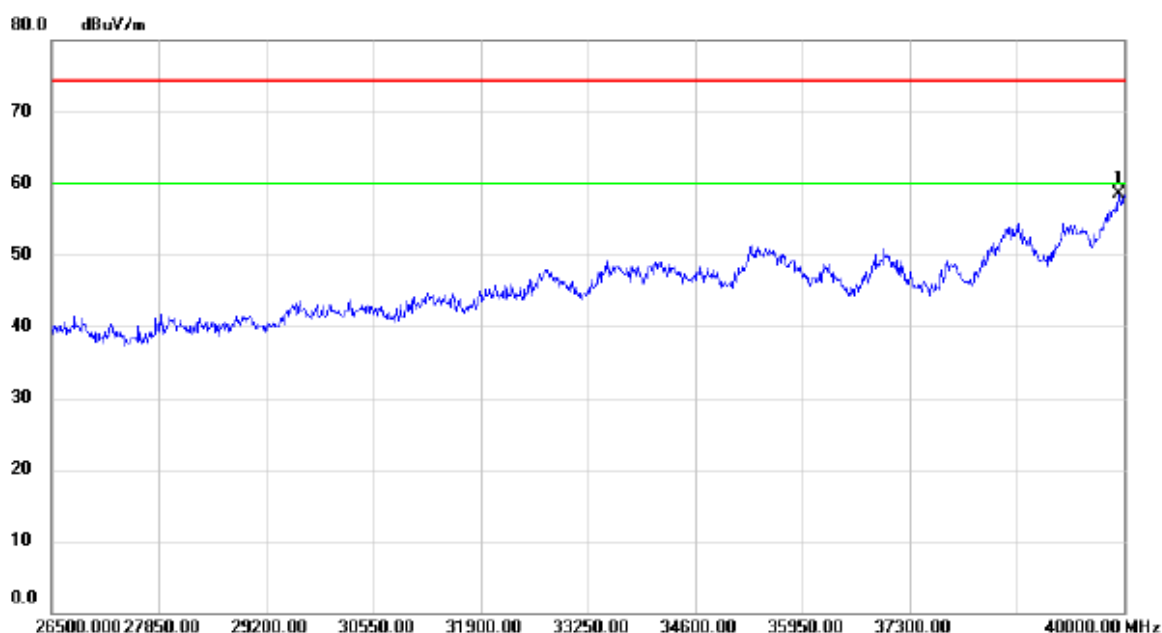

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	41.02	17.43	58.45	74.30	-15.85	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5745MHz


Horizontal

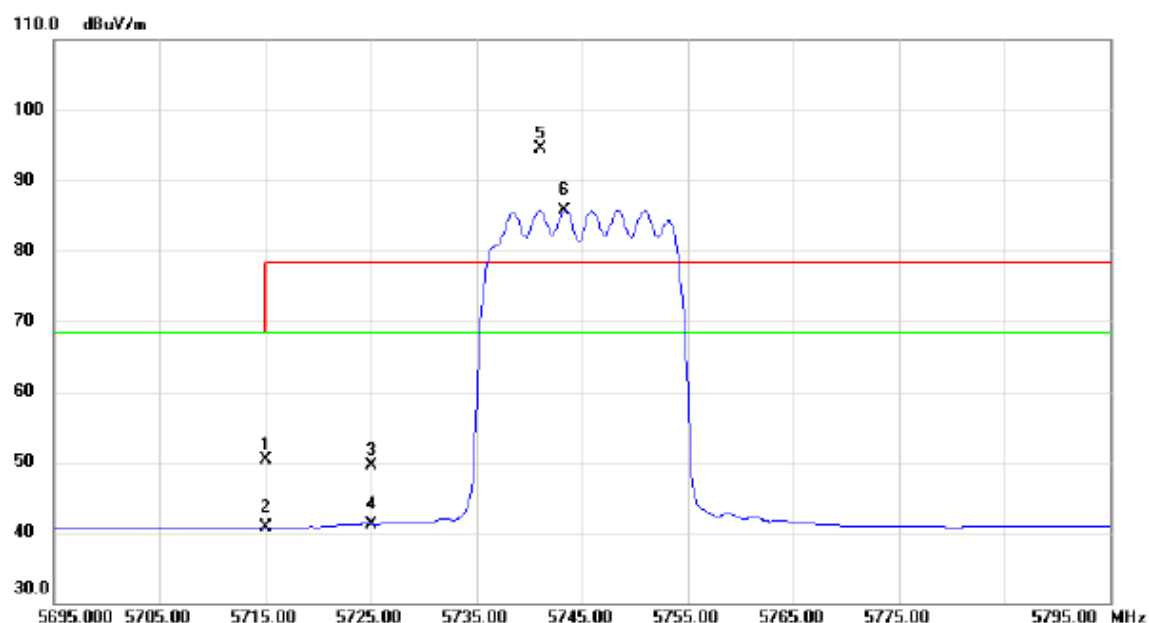


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	8.95	41.25	50.20	68.30	-18.10	peak	
2		5715.000	-0.51	41.25	40.74	68.30	-27.56	AVG	
3		5725.000	8.17	41.27	49.44	78.30	-28.86	peak	
4		5725.000	-0.08	41.27	41.19	68.30	-27.11	AVG	
5	X	5741.000	53.31	41.29	94.60	78.30	16.30	peak	No Limit
6	*	5743.400	44.42	41.29	85.71	68.30	17.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5745MHz

Horizontal

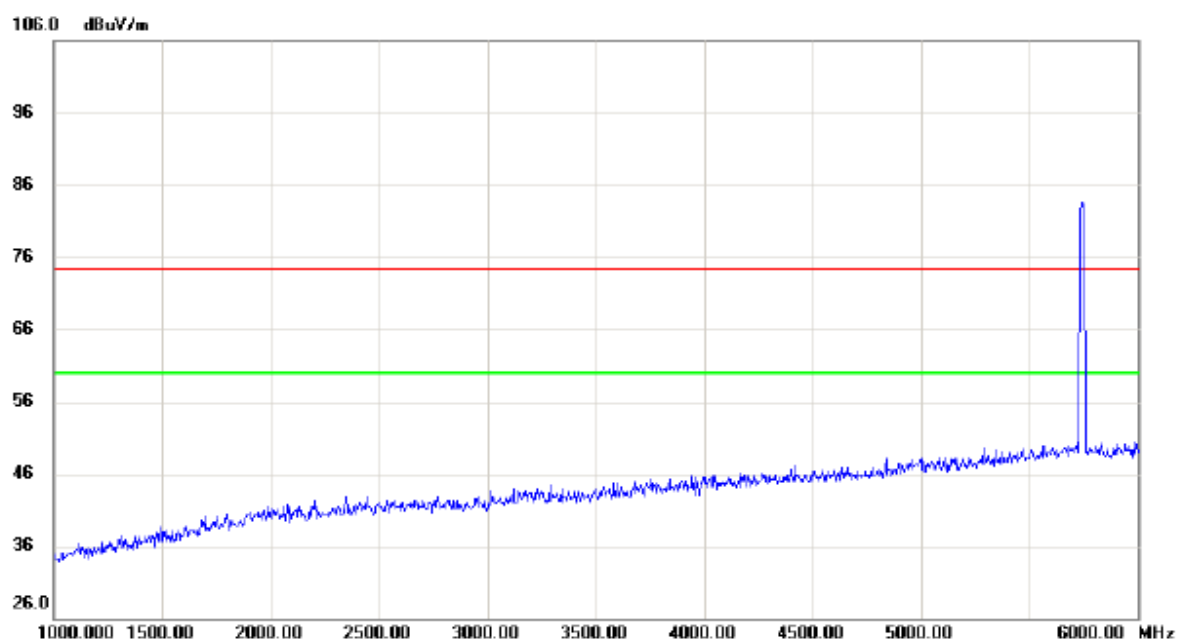


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

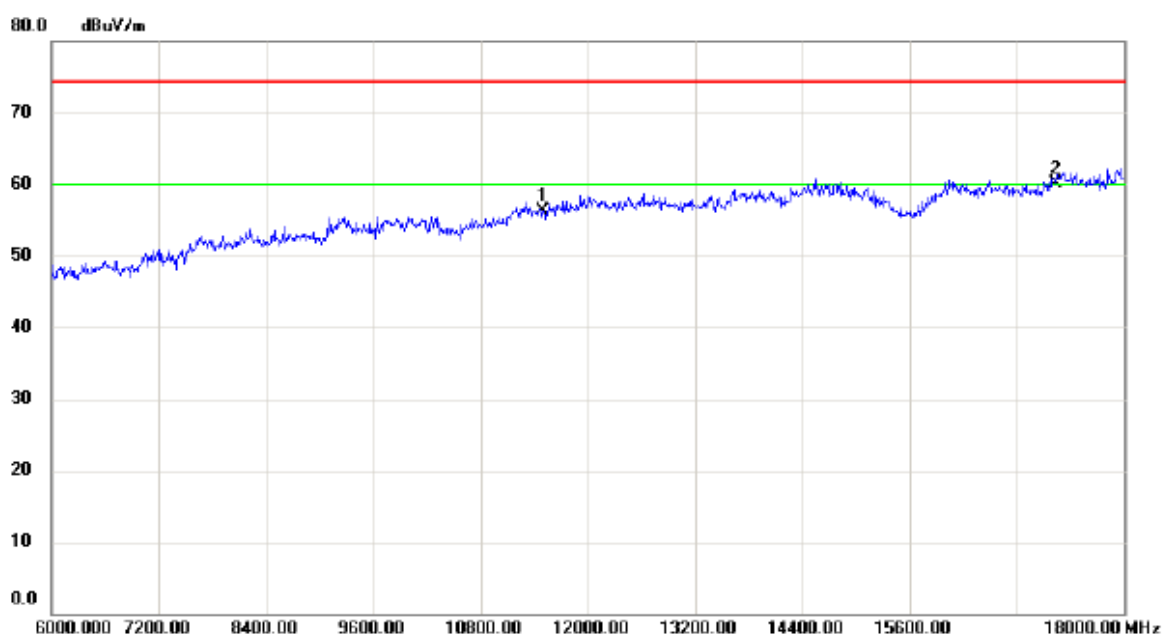


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	39.34	16.91	56.25	74.30	-18.05	peak	
2	*	17235.00	38.67	21.53	60.20	74.30	-14.10	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5745MHz

Horizontal

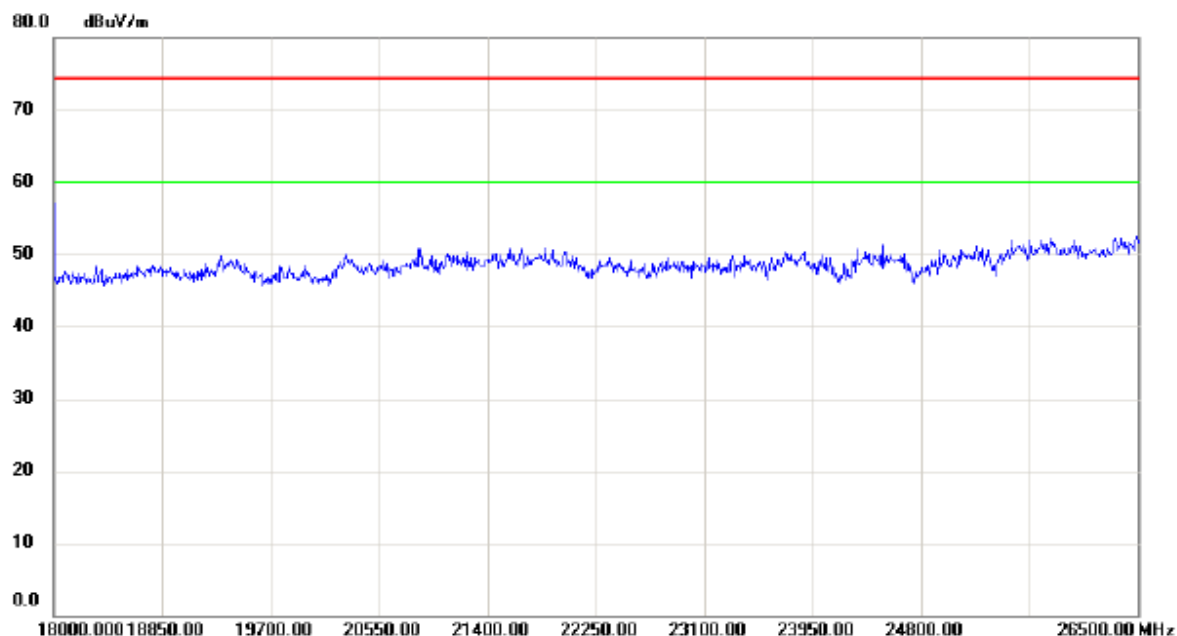


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

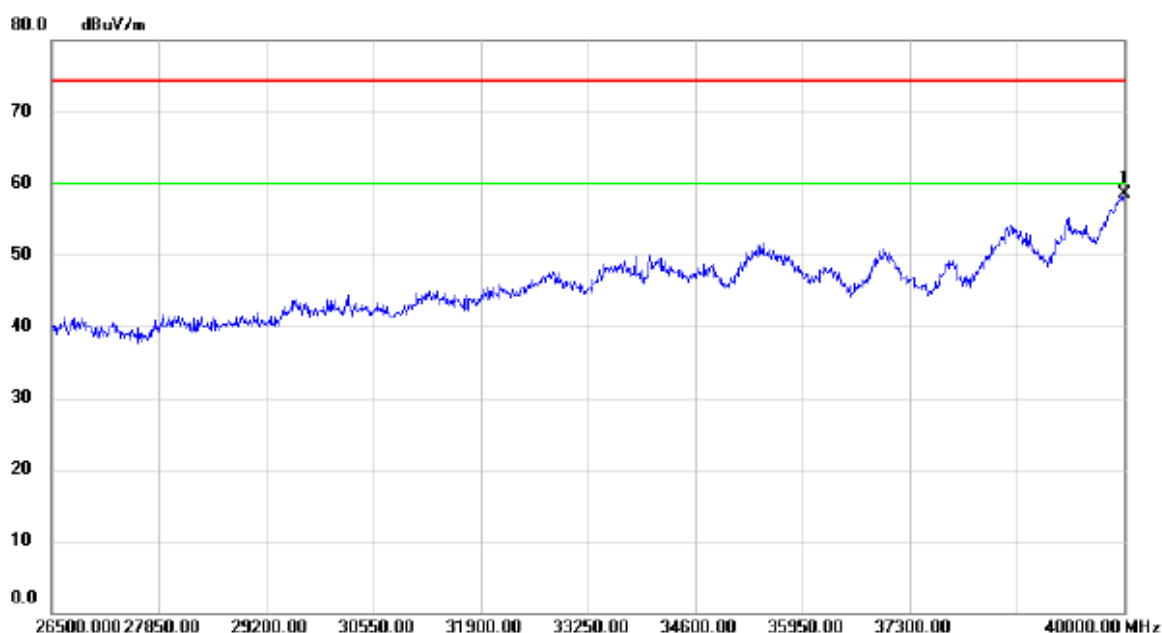

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	40.85	17.60	58.45	74.30	-15.85	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5825MHz


Vertical

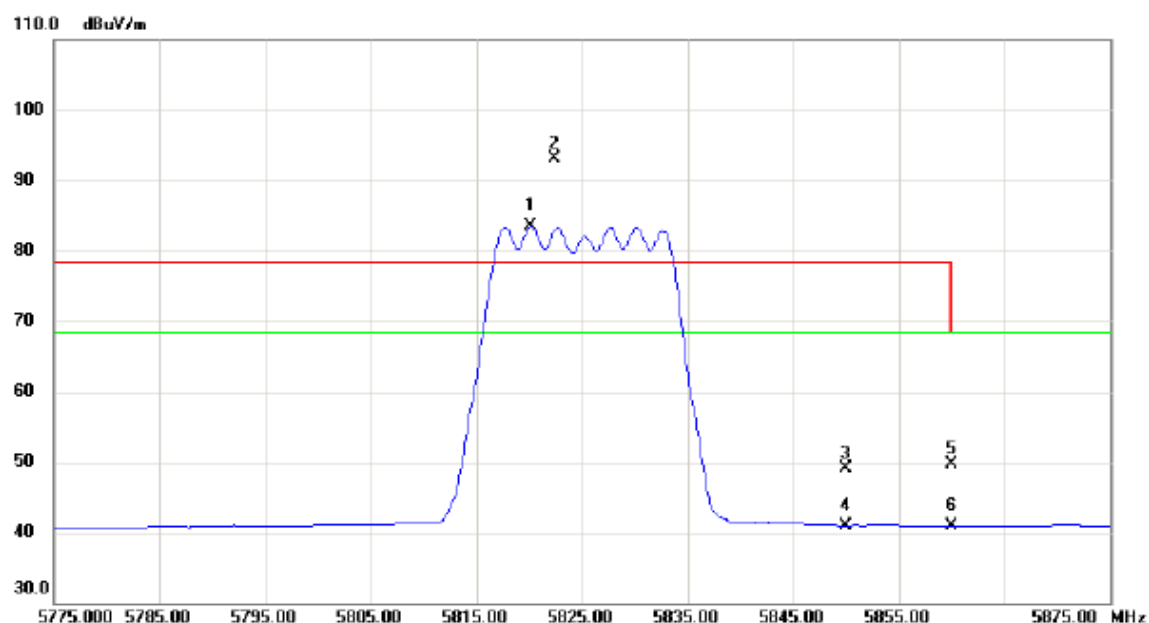


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.200	42.08	41.39	83.47	68.30	15.17	AVG	No Limit
2	X	5822.400	51.78	41.40	93.18	78.30	14.88	peak	No Limit
3		5850.000	7.58	41.44	49.02	78.30	-29.28	peak	
4		5850.000	-0.45	41.44	40.99	68.30	-27.31	AVG	
5		5860.000	8.18	41.45	49.63	68.30	-18.67	peak	
6		5860.000	-0.46	41.45	40.99	68.30	-27.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5825MHz

Vertical

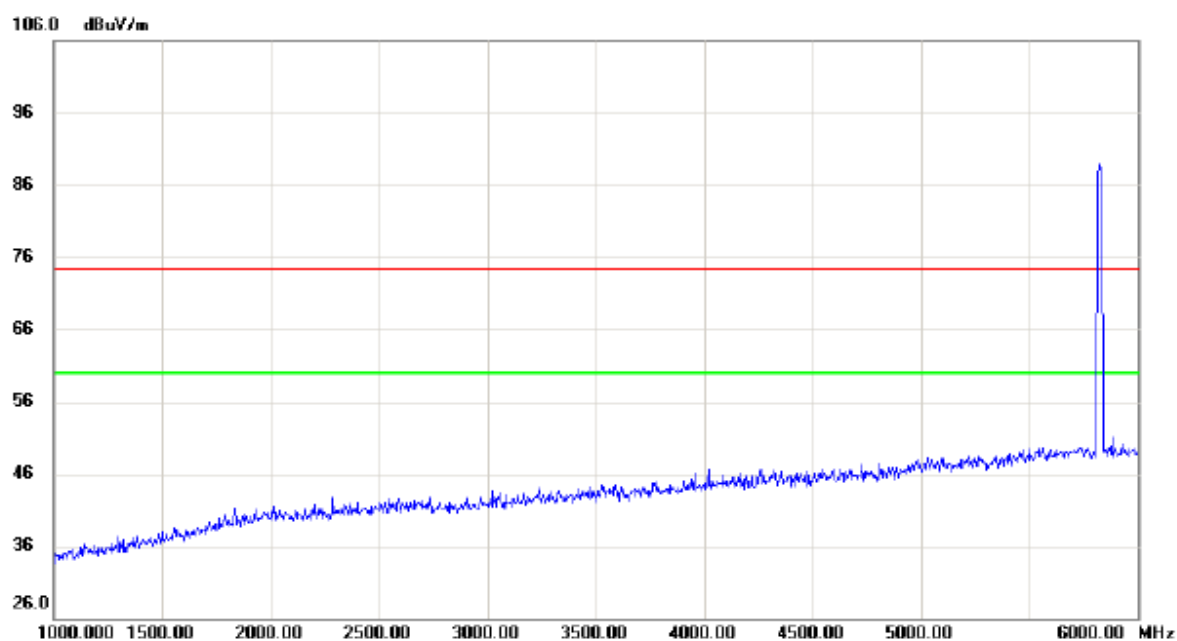


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

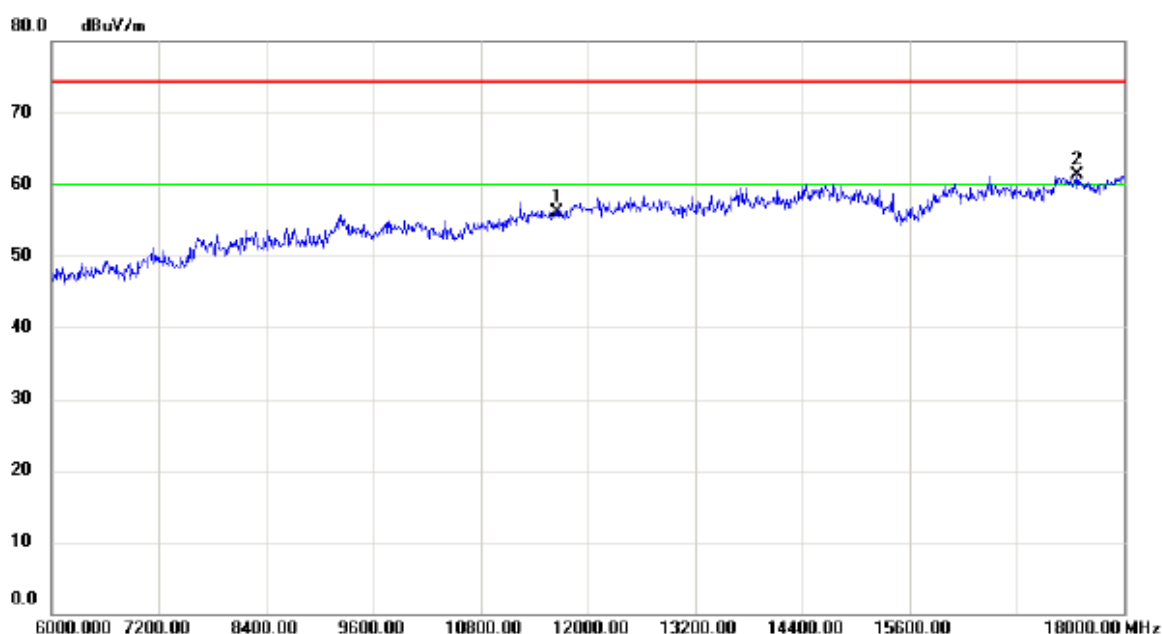


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	38.95	17.17	56.12	74.30	-18.18	peak	
2	*	17475.00	38.98	22.29	61.27	74.30	-13.03	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5825MHz

Vertical

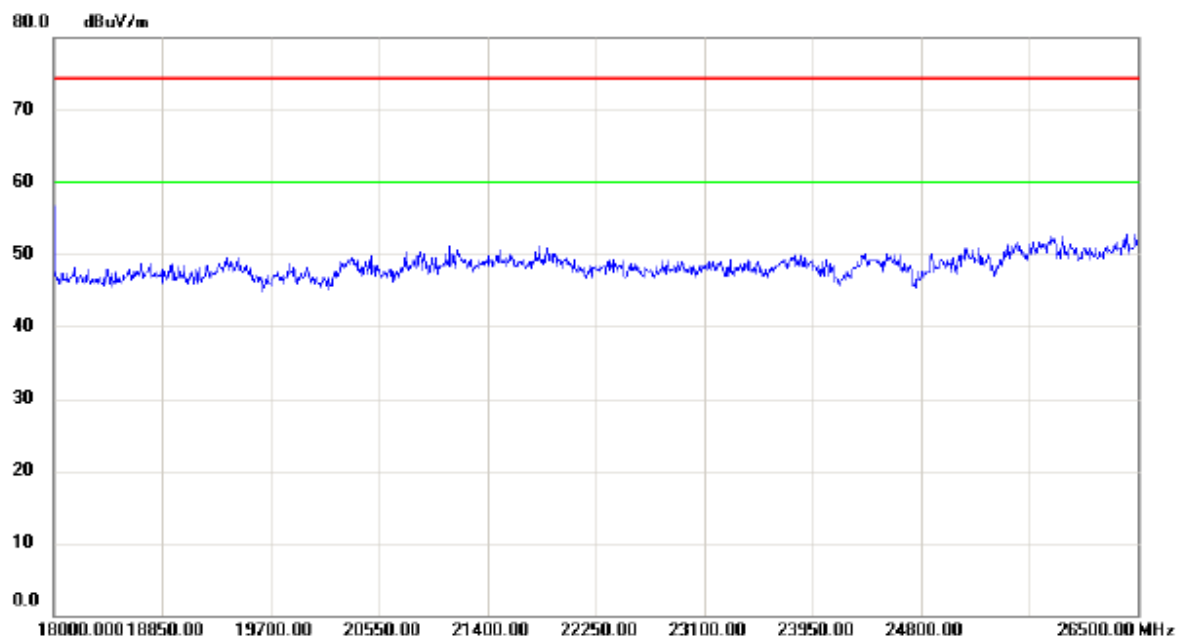


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

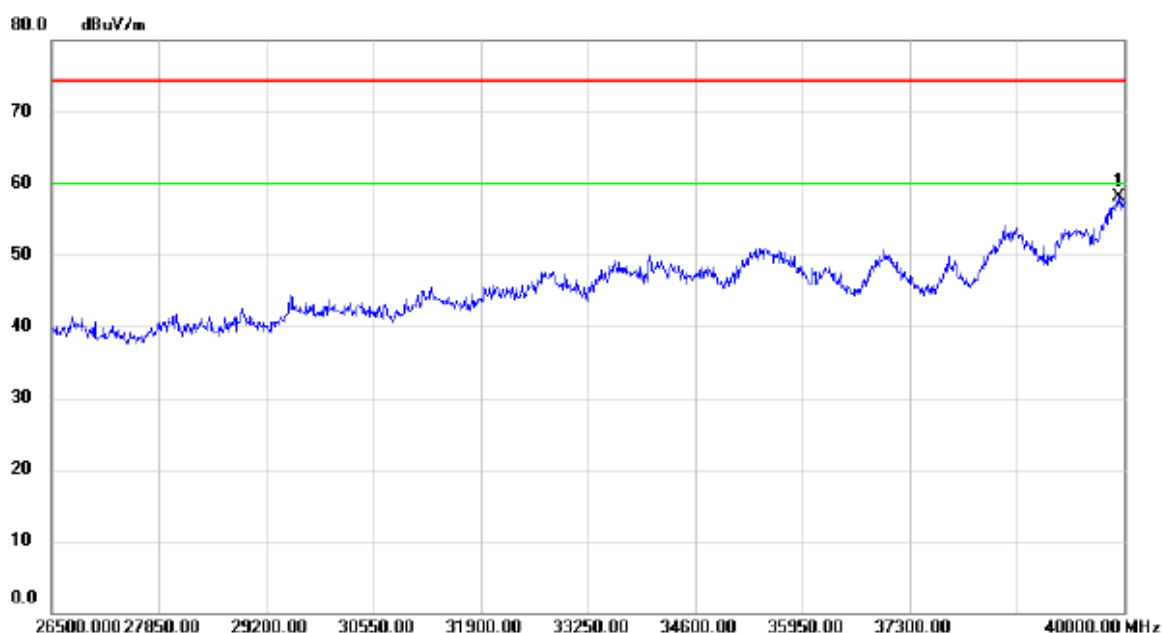

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	40.61	17.43	58.04	74.30	-16.26	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5825MHz


Horizontal

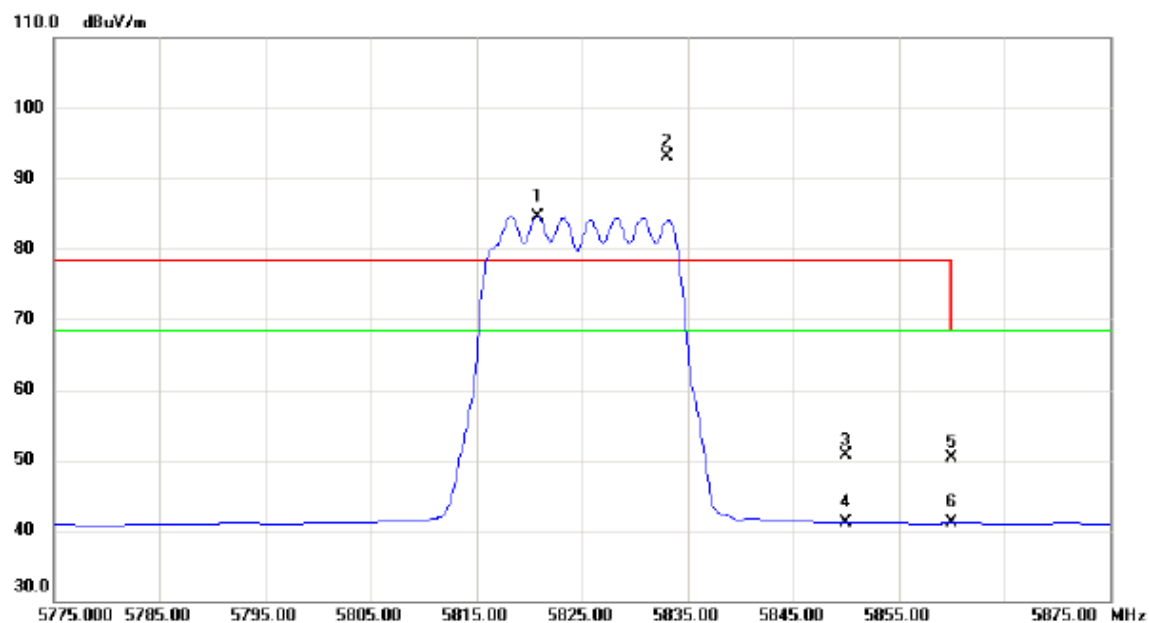


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.800	43.17	41.39	84.56	68.30	16.26	AVG	No Limit
2	X	5833.100	51.70	41.41	93.11	78.30	14.81	peak	No Limit
3		5850.000	9.21	41.44	50.65	78.30	-27.65	peak	
4		5850.000	-0.38	41.44	41.06	68.30	-27.24	AVG	
5		5860.000	8.84	41.45	50.29	68.30	-18.01	peak	
6		5860.000	-0.43	41.45	41.02	68.30	-27.28	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5825MHz

Horizontal

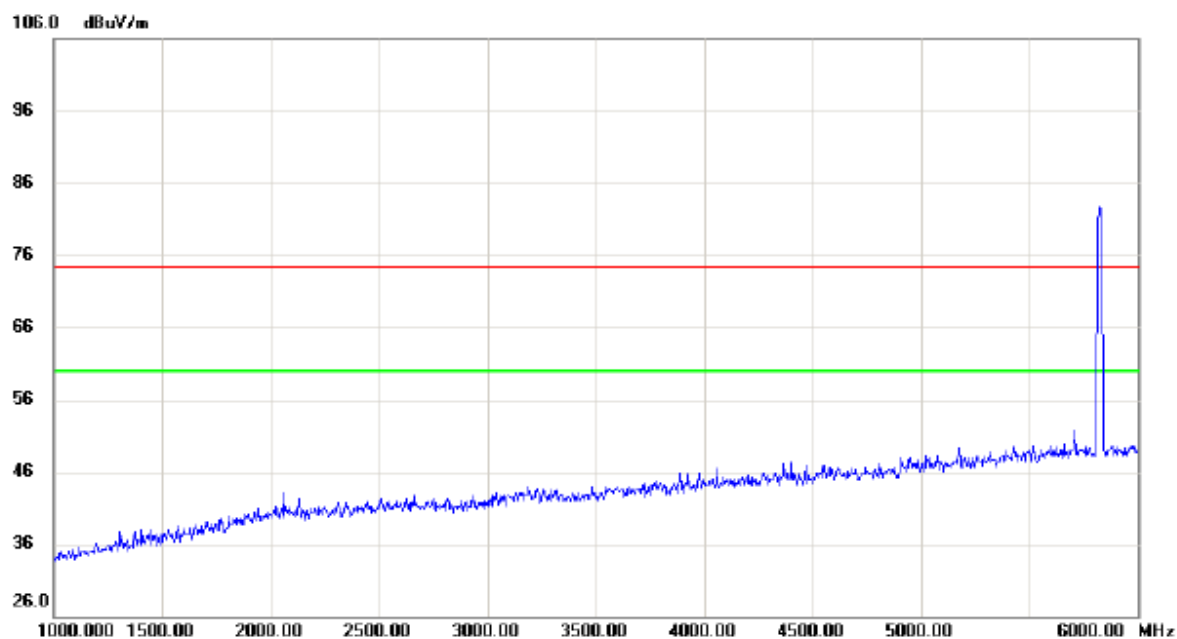


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

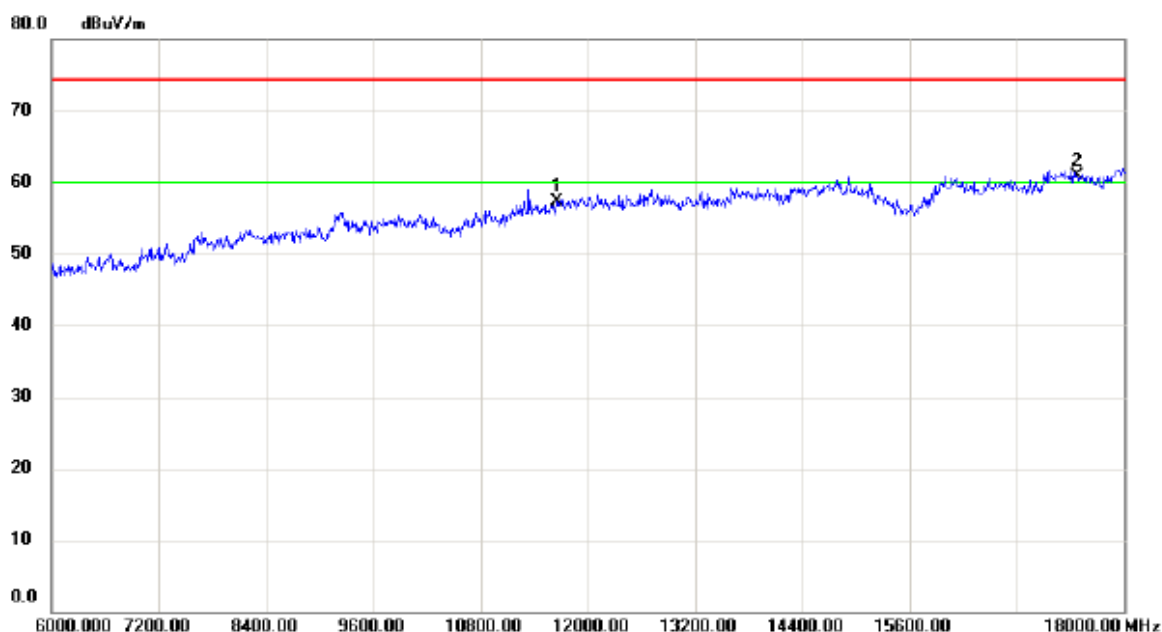


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	40.15	17.17	57.32	74.30	-16.98	peak	
2	*	17475.00	38.62	22.29	60.91	74.30	-13.39	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT20) Mode 5825MHz

Horizontal

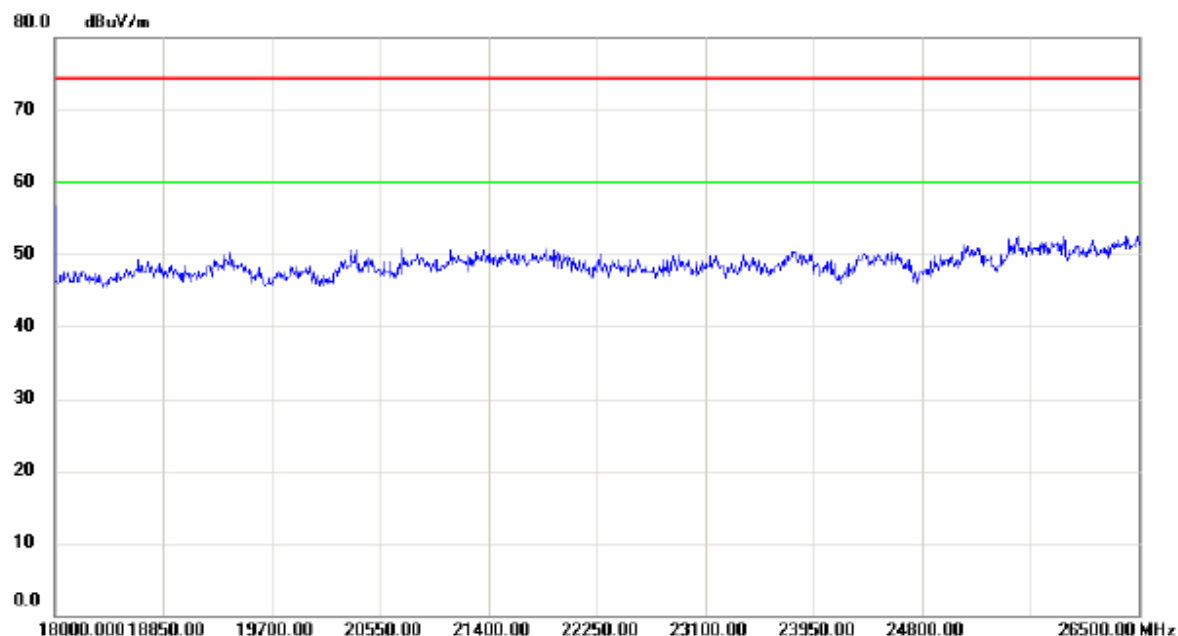


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

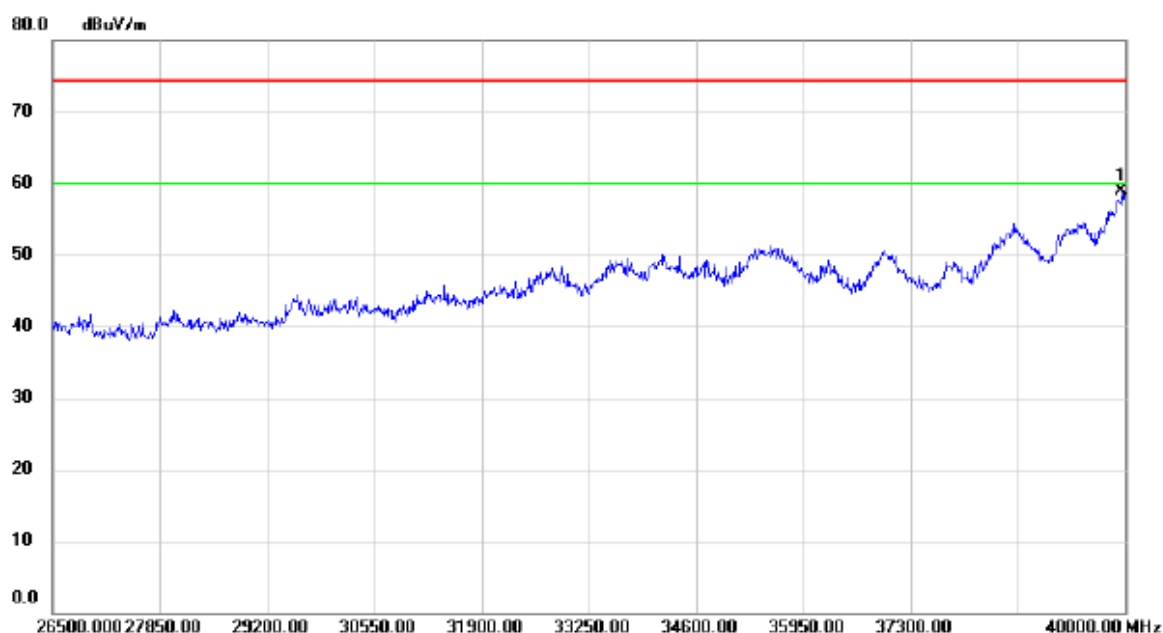

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	41.38	17.50	58.88	74.30	-15.42	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5755MHz


Vertical

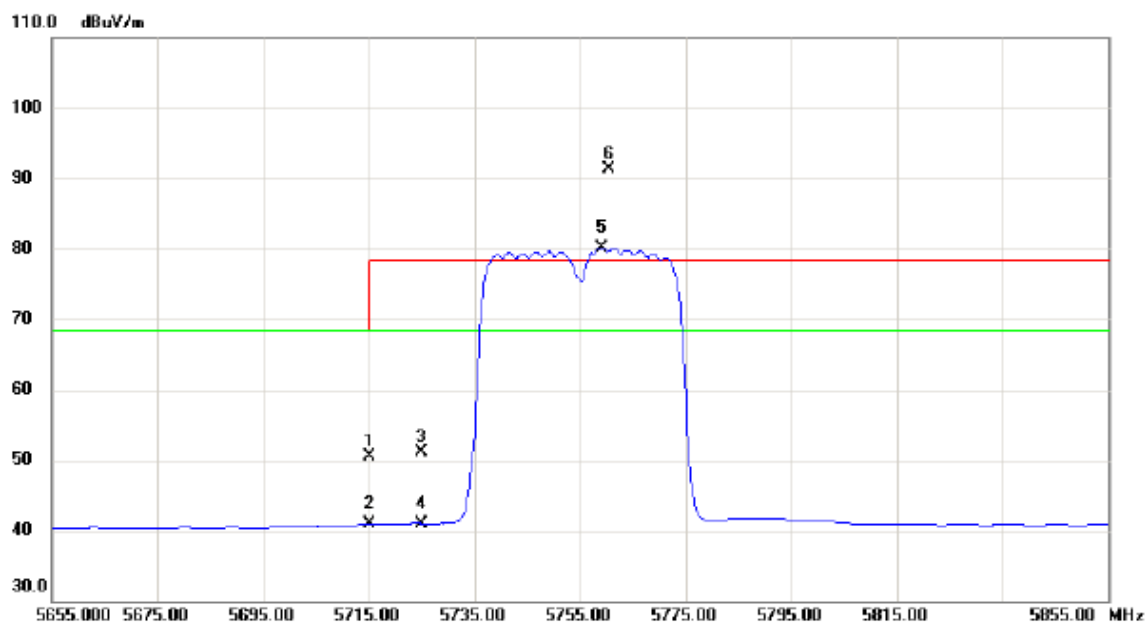


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	9.25	41.25	50.50	68.30	-17.80	peak	
2		5715.000	-0.36	41.25	40.89	68.30	-27.41	AVG	
3		5725.000	9.78	41.27	51.05	78.30	-27.25	peak	
4		5725.000	-0.28	41.27	40.99	68.30	-27.31	AVG	
5	X	5759.000	38.85	41.31	80.16	68.30	11.86	AVG	No Limit
6	*	5760.400	49.90	41.32	91.22	78.30	12.92	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5755MHz

Vertical

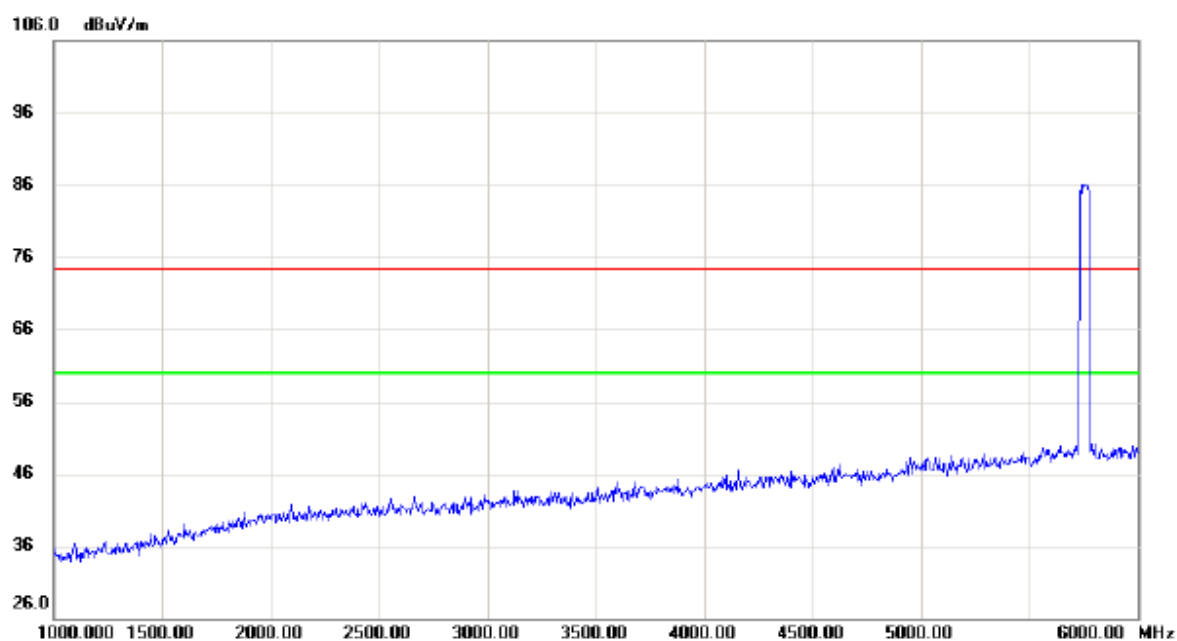


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

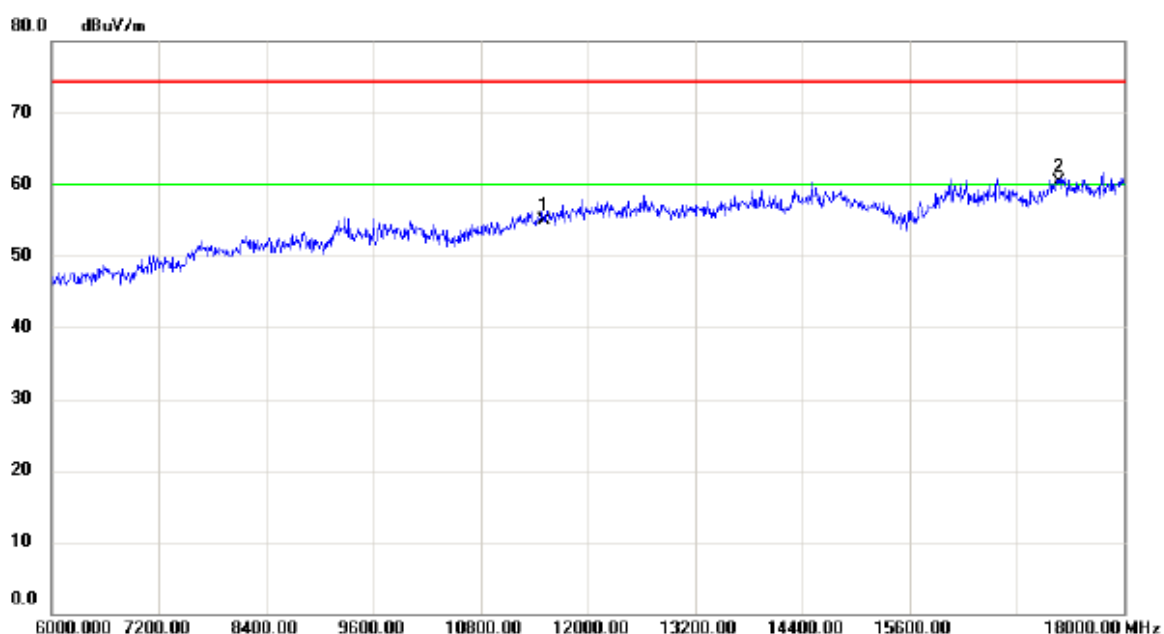


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	37.92	16.96	54.88	74.30	-19.42	peak	
2	*	17265.00	38.63	21.62	60.25	74.30	-14.05	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5755MHz

Vertical

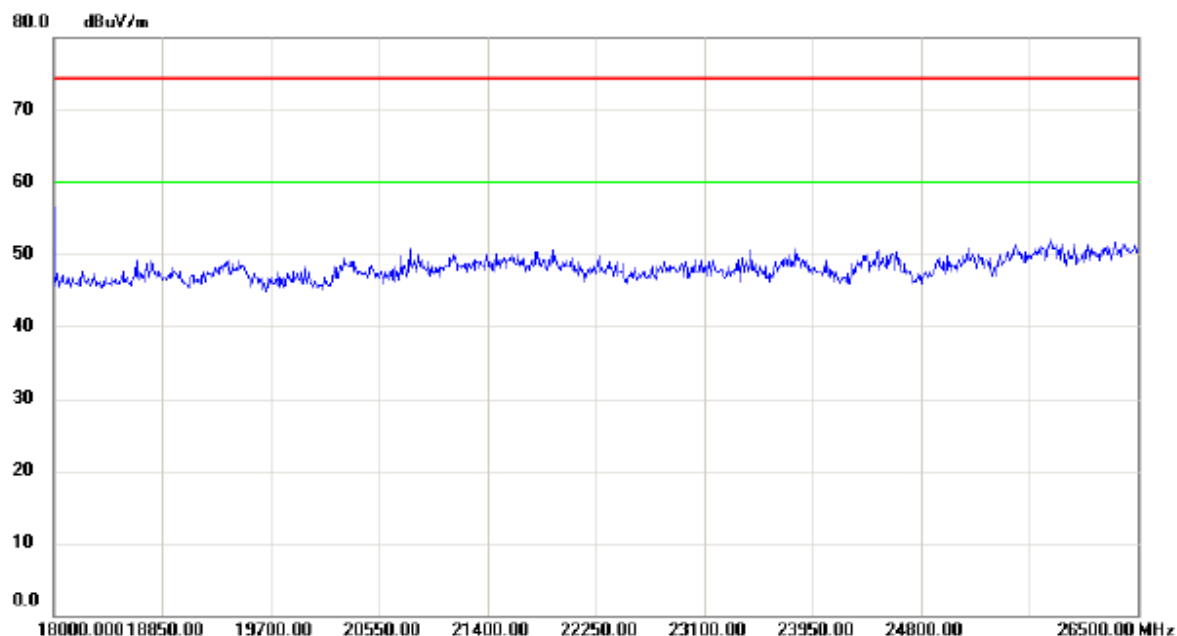


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

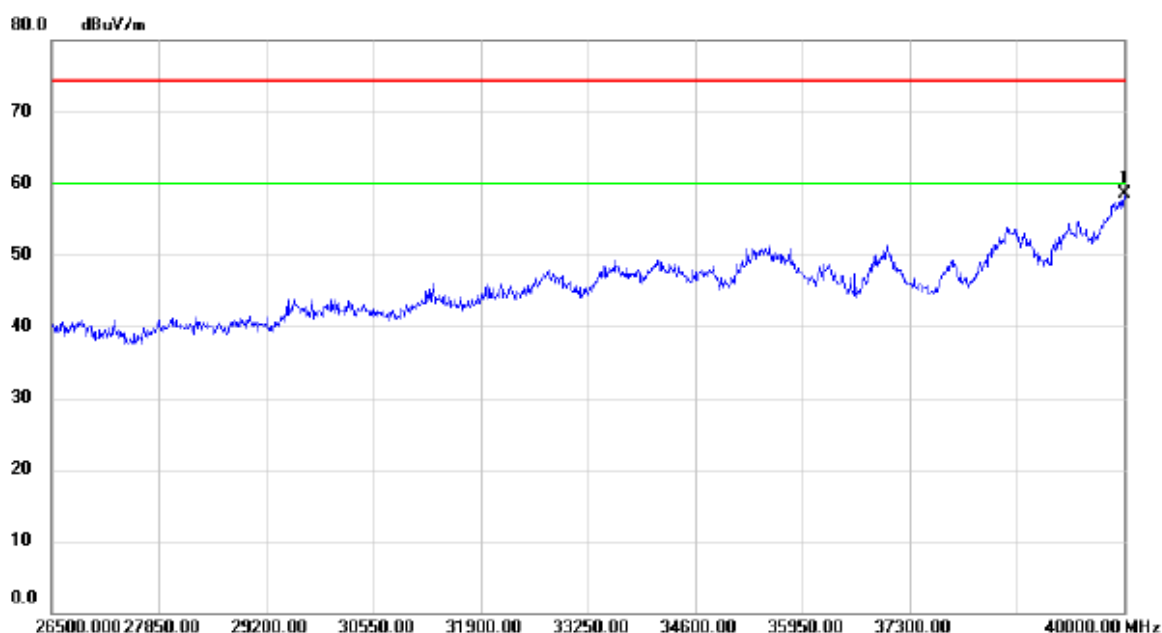

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	40.91	17.60	58.51	74.30	-15.79	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5755MHz


Horizontal

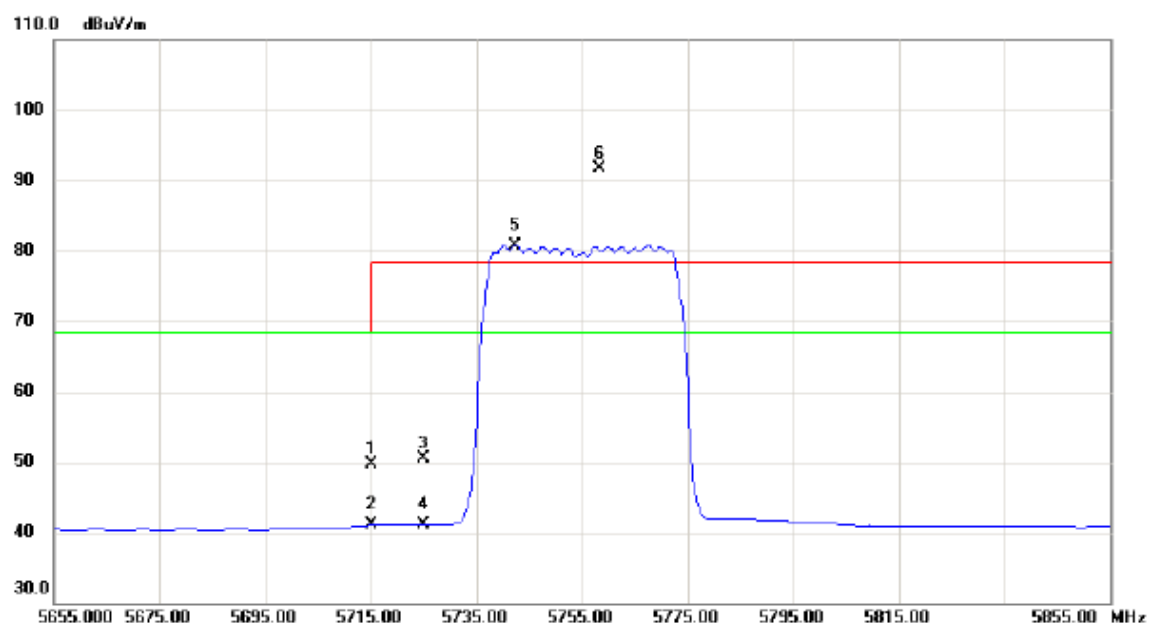


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	8.37	41.25	49.62	68.30	-18.68	peak	
2		5715.000	-0.20	41.25	41.05	68.30	-27.25	AVG	
3		5725.000	9.23	41.27	50.50	78.30	-27.80	peak	
4		5725.000	-0.16	41.27	41.11	68.30	-27.19	AVG	
5	X	5742.400	39.46	41.29	80.75	68.30	12.45	AVG	No Limit
6	*	5758.400	50.41	41.31	91.72	78.30	13.42	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5755MHz

Horizontal

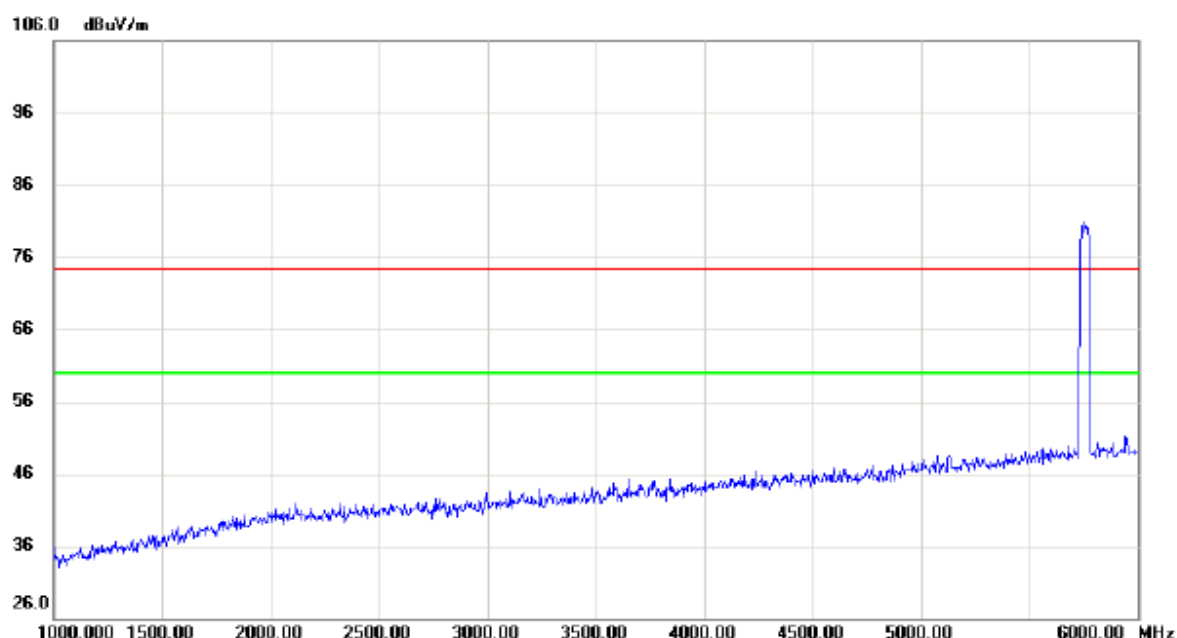


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

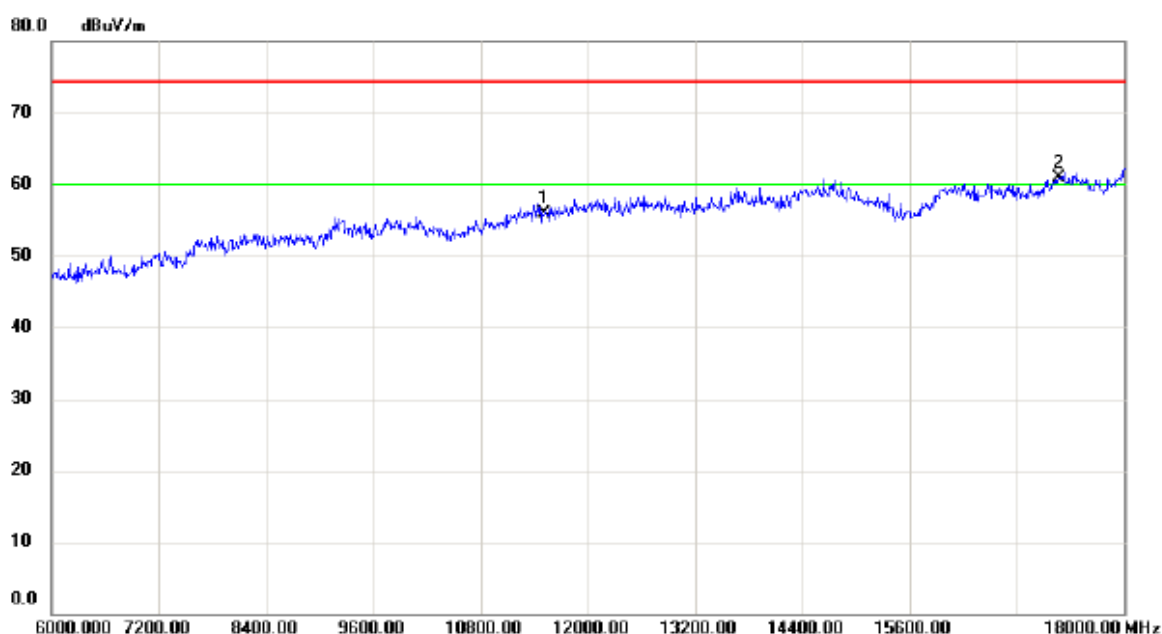


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	38.99	16.96	55.95	74.30	-18.35	peak	
2	*	17265.00	39.31	21.62	60.93	74.30	-13.37	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5755MHz

Horizontal

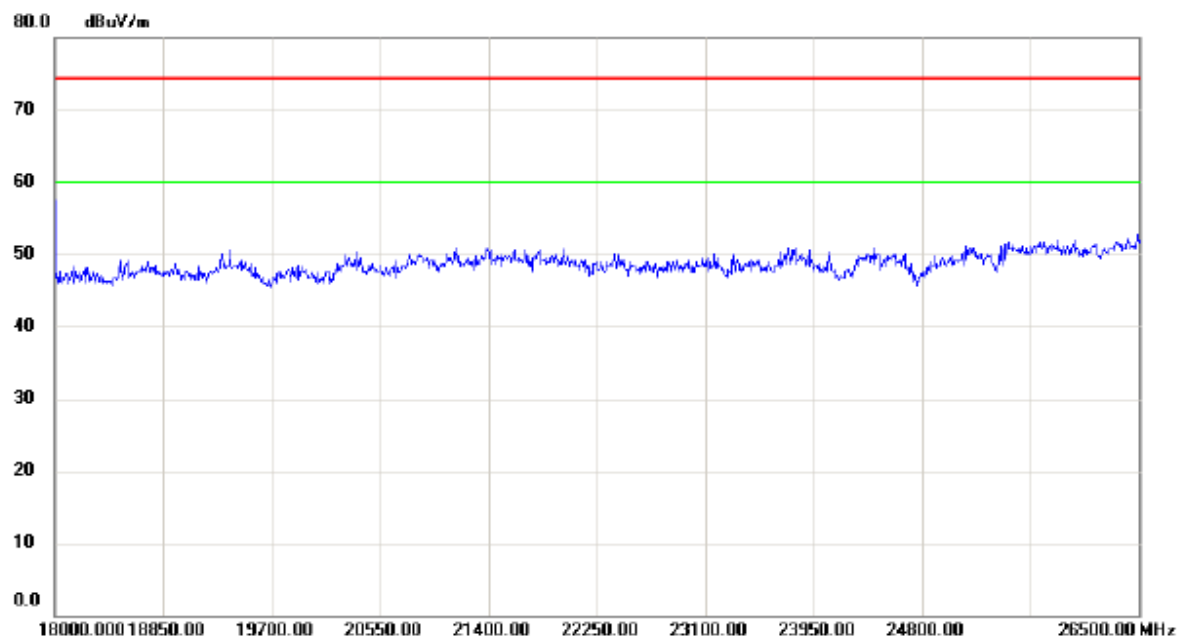


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

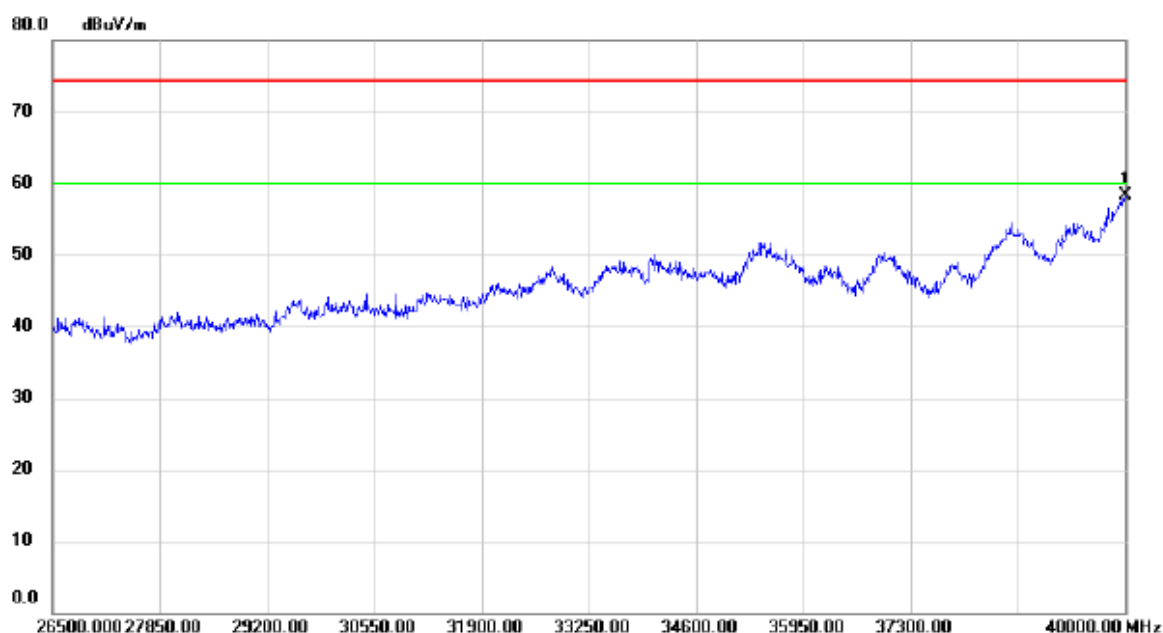

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	40.77	17.60	58.37	74.30	-15.93	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5795MHz


Vertical

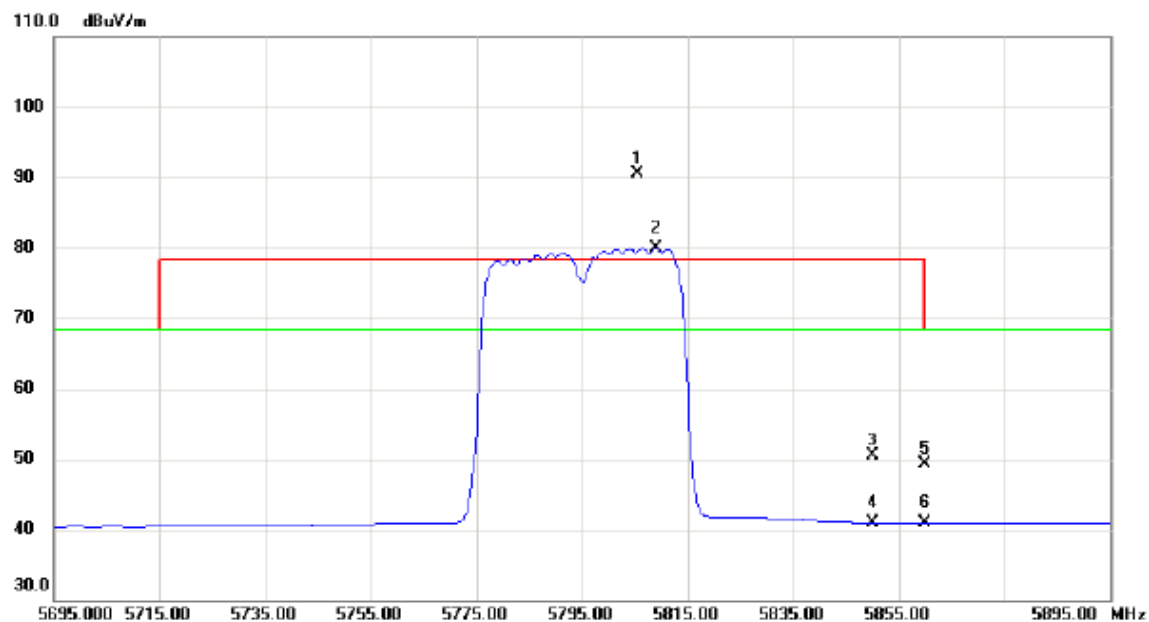


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5805.600	49.14	41.38	90.52	78.30	12.22	peak	No Limit
2	X	5809.000	38.51	41.38	79.89	68.30	11.59	AVG	No Limit
3		5850.000	8.97	41.44	50.41	78.30	-27.89	peak	
4		5850.000	-0.56	41.44	40.88	68.30	-27.42	AVG	
5		5860.000	7.75	41.45	49.20	68.30	-19.10	peak	
6		5860.000	-0.53	41.45	40.92	68.30	-27.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5795MHz

Vertical

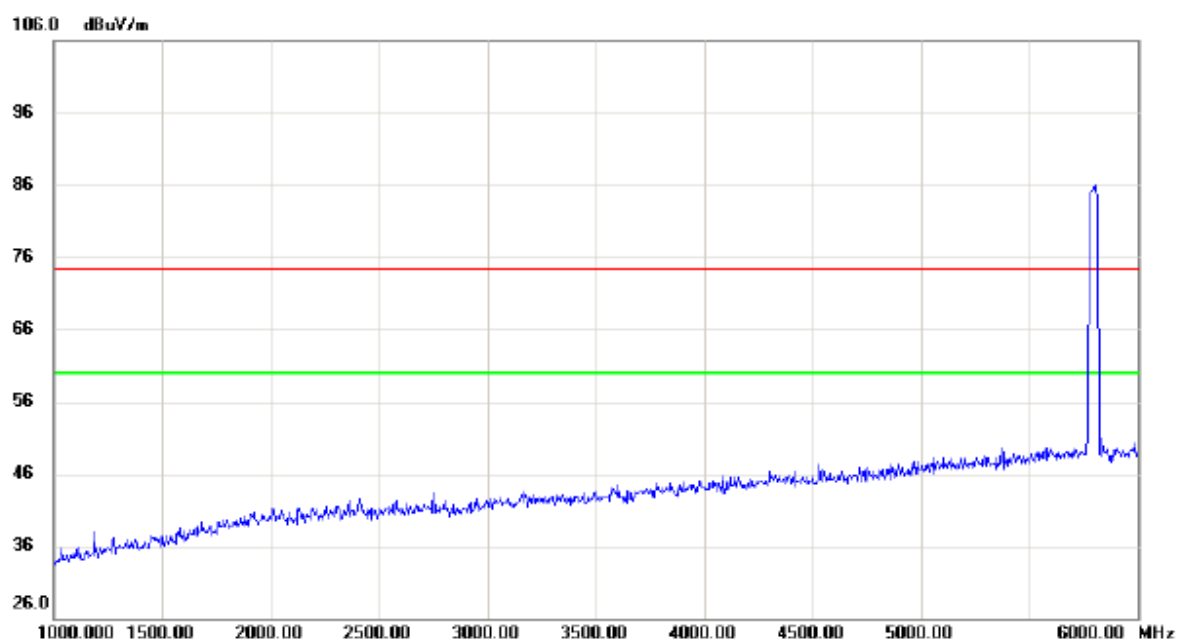


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

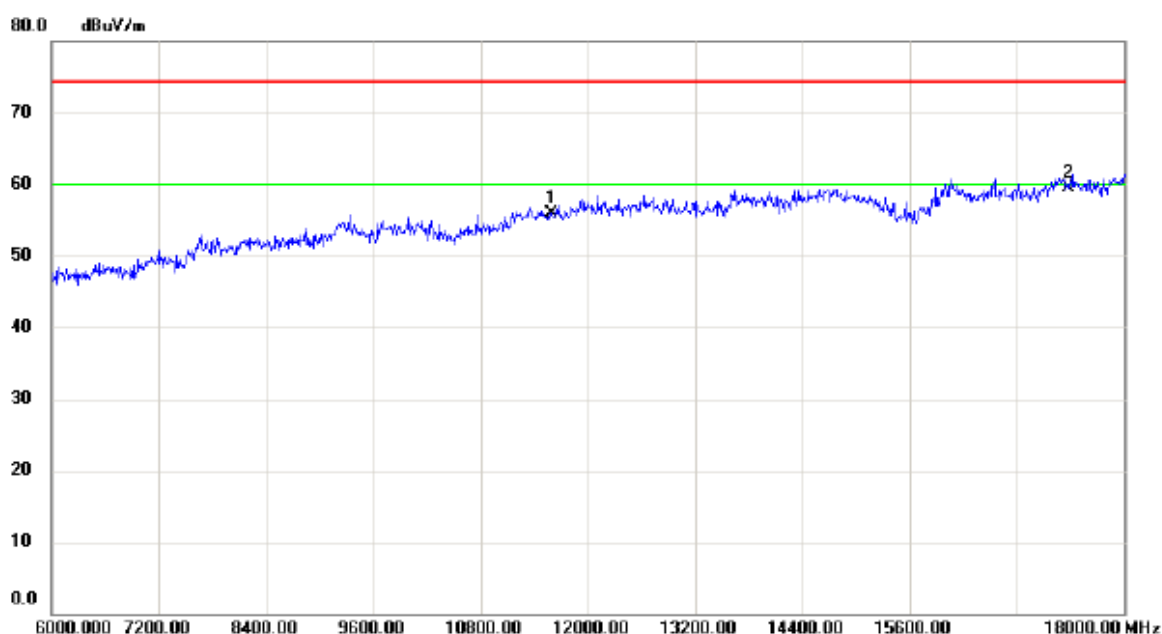


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	38.78	17.08	55.86	74.30	-18.44	peak	
2	*	17385.00	37.56	22.00	59.56	74.30	-14.74	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5795MHz

Vertical

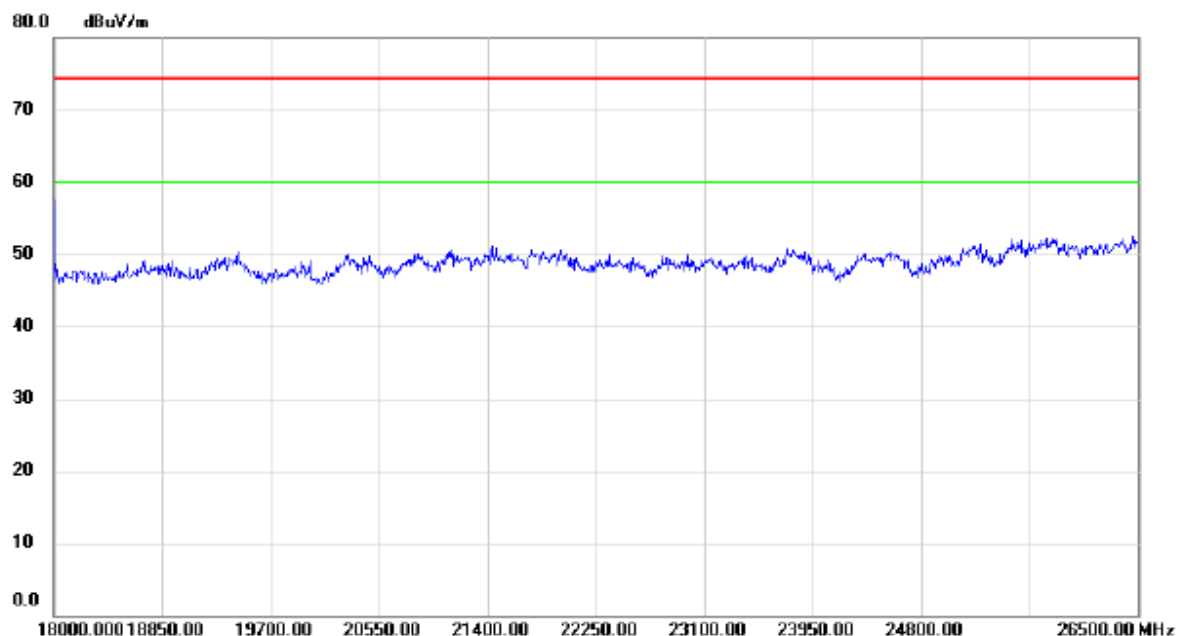


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

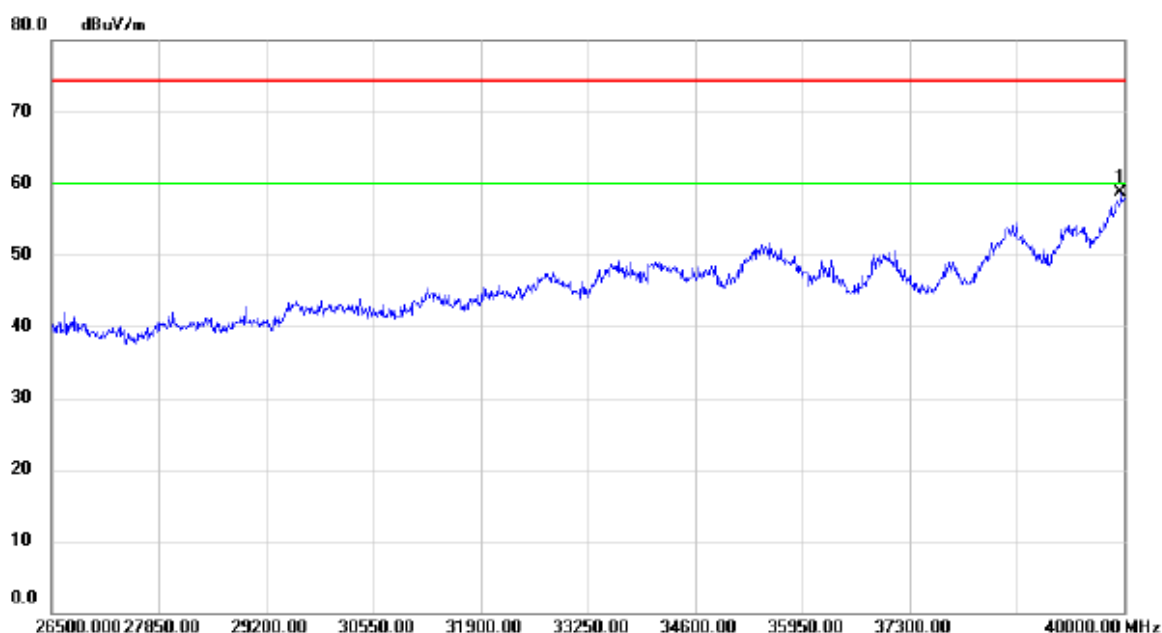

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	41.17	17.50	58.67	74.30	-15.63	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5795MHz


Horizontal

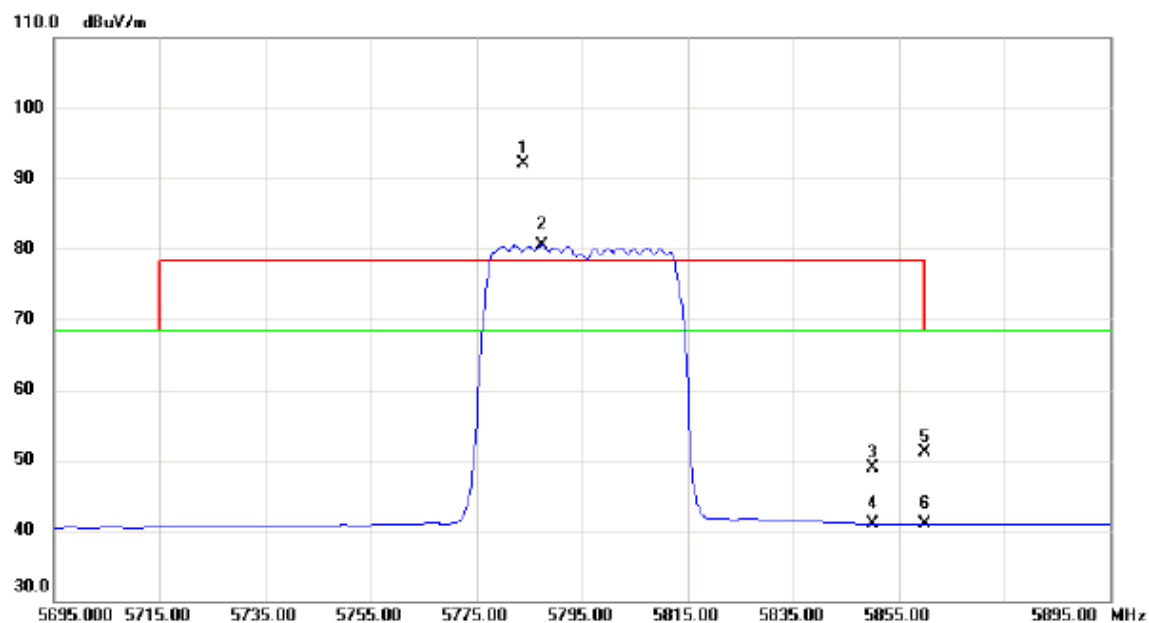


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5783.800	50.78	41.34	92.12	78.30	13.82	peak	No Limit
2	X	5787.400	39.10	41.35	80.45	68.30	12.15	AVG	No Limit
3		5850.000	7.56	41.44	49.00	78.30	-29.30	peak	
4		5850.000	-0.54	41.44	40.90	68.30	-27.40	AVG	
5		5860.000	9.58	41.45	51.03	68.30	-17.27	peak	
6		5860.000	-0.53	41.45	40.92	68.30	-27.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5795MHz

Horizontal

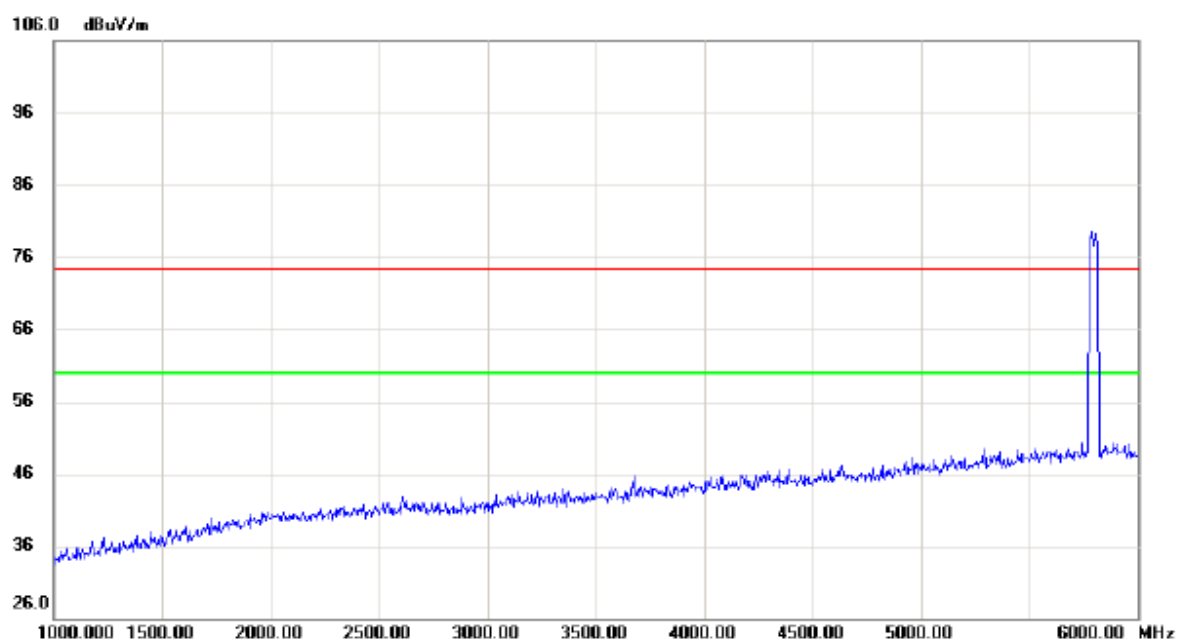


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

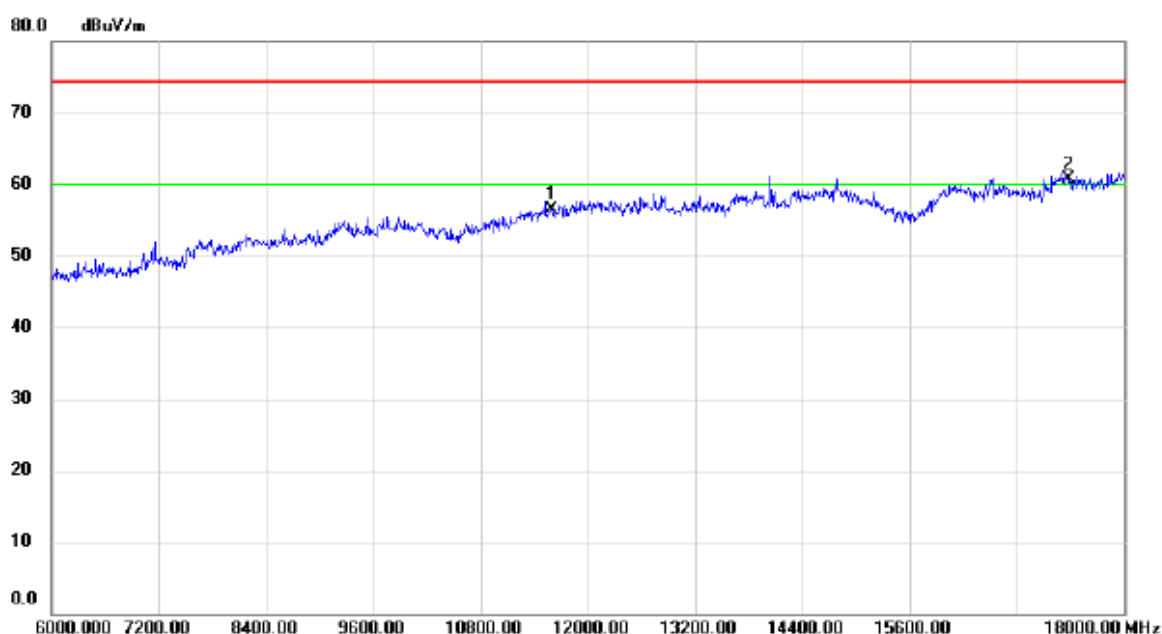


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	39.47	17.08	56.55	74.30	-17.75	peak	
2	*	17385.00	38.76	22.00	60.76	74.30	-13.54	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT40) Mode 5795MHz

Horizontal

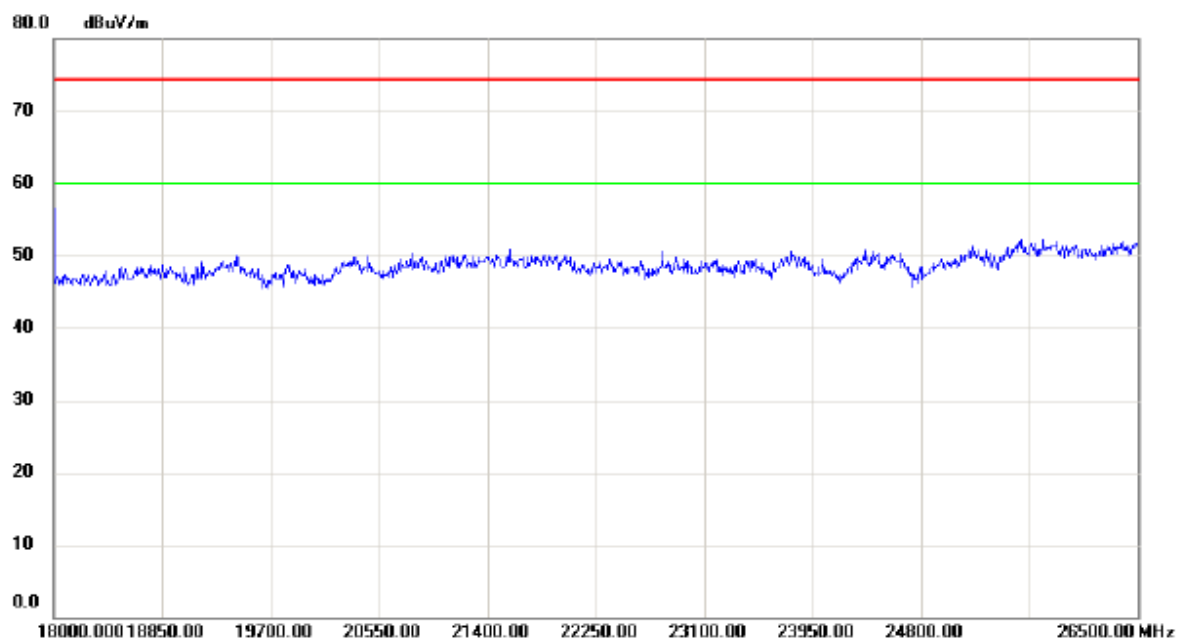


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

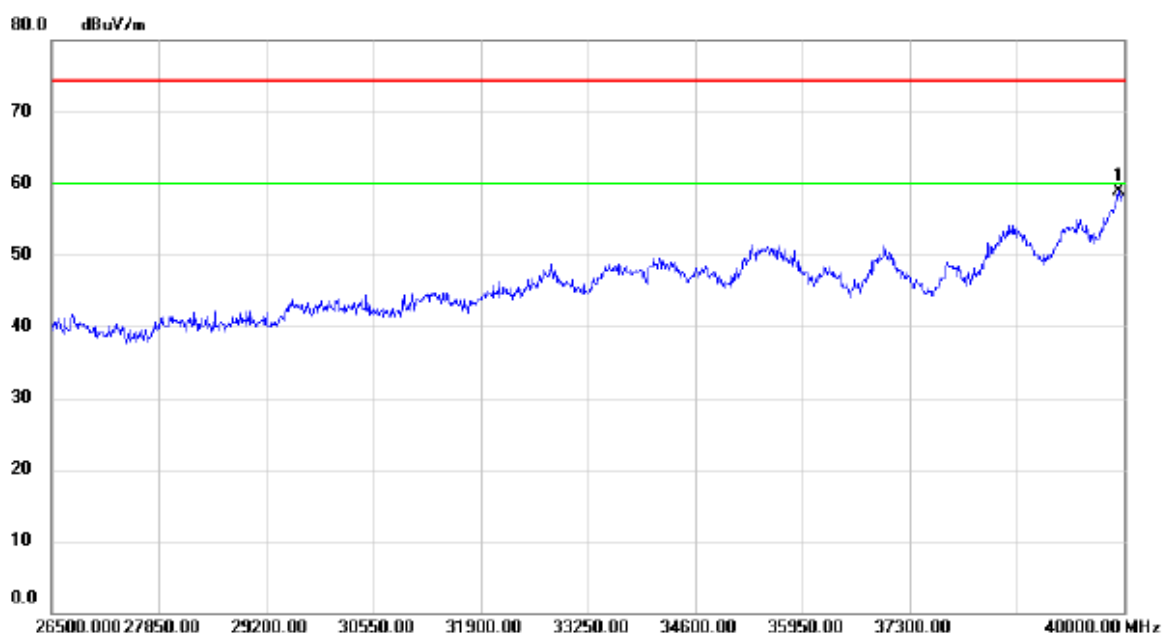

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	41.44	17.43	58.87	74.30	-15.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT80) Mode 5775MHz


Vertical

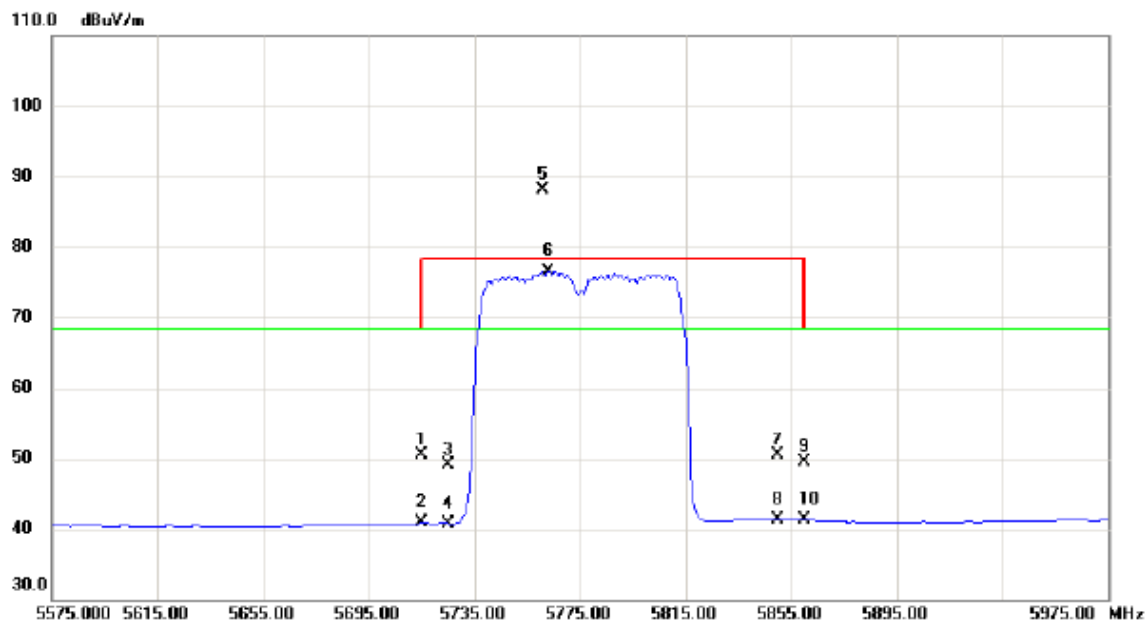


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	9.17	41.25	50.42	68.30	-17.88	peak	
2		5715.000	-0.44	41.25	40.81	68.30	-27.49	AVG	
3		5725.000	7.83	41.27	49.10	78.30	-29.20	peak	
4		5725.000	-0.48	41.27	40.79	68.30	-27.51	AVG	
5	*	5760.600	46.70	41.32	88.02	78.30	9.72	peak	No Limit
6	X	5763.000	35.20	41.32	76.52	68.30	8.22	AVG	No Limit
7		5850.000	9.11	41.44	50.55	78.30	-27.75	peak	
8		5850.000	-0.15	41.44	41.29	68.30	-27.01	AVG	
9		5860.000	8.09	41.45	49.54	68.30	-18.76	peak	
10		5860.000	-0.17	41.45	41.28	68.30	-27.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT80) Mode 5775MHz

Vertical

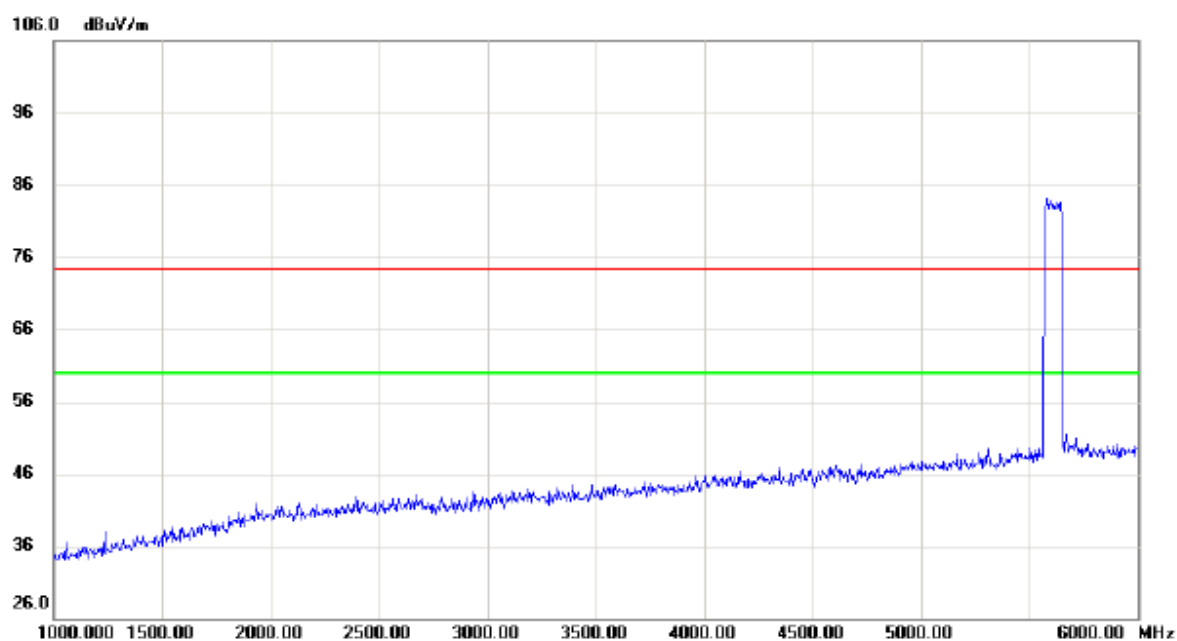


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

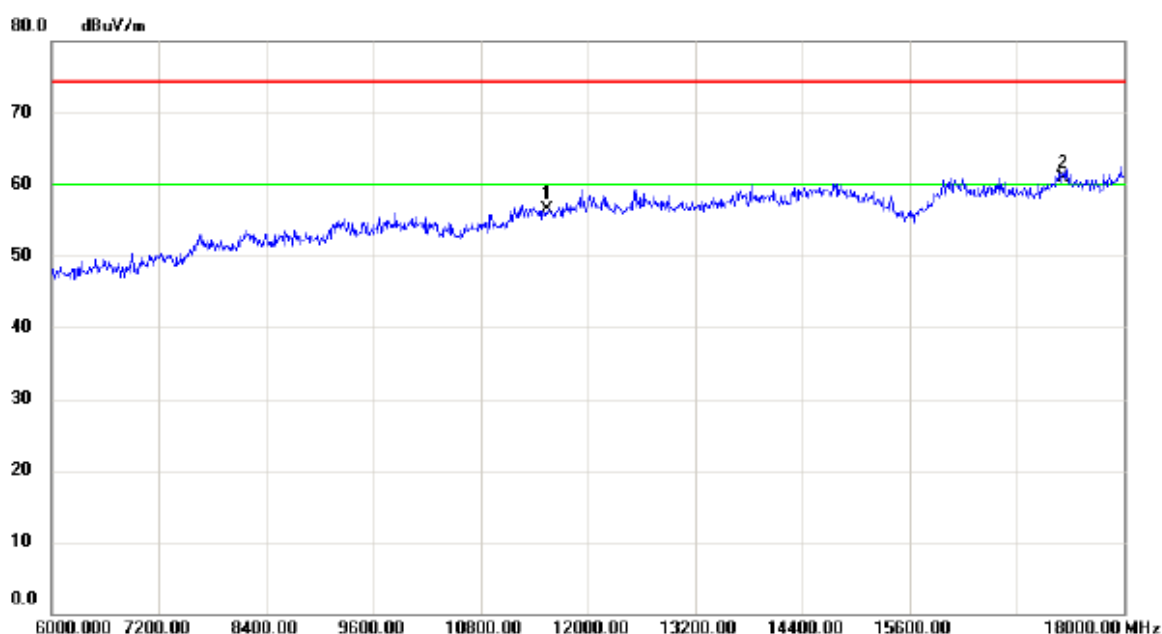


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	39.39	17.02	56.41	74.30	-17.89	peak	
2	*	17325.00	39.05	21.81	60.86	74.30	-13.44	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT80) Mode 5775MHz

Vertical

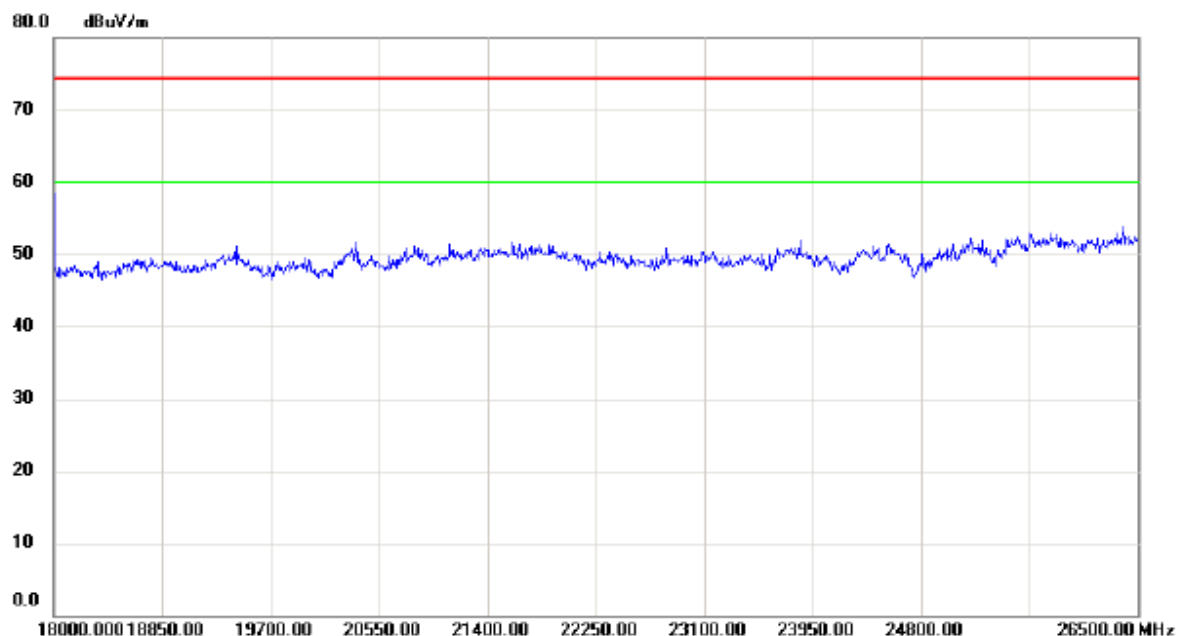


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

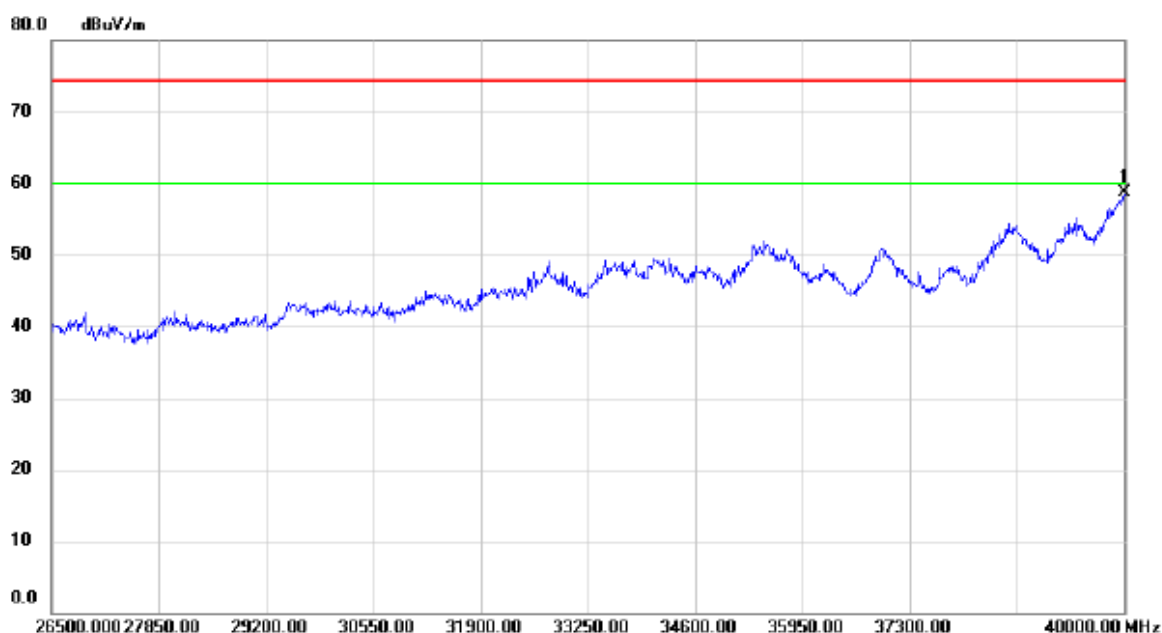

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	41.06	17.60	58.66	74.30	-15.64	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT80) Mode 5775MHz


Horizontal

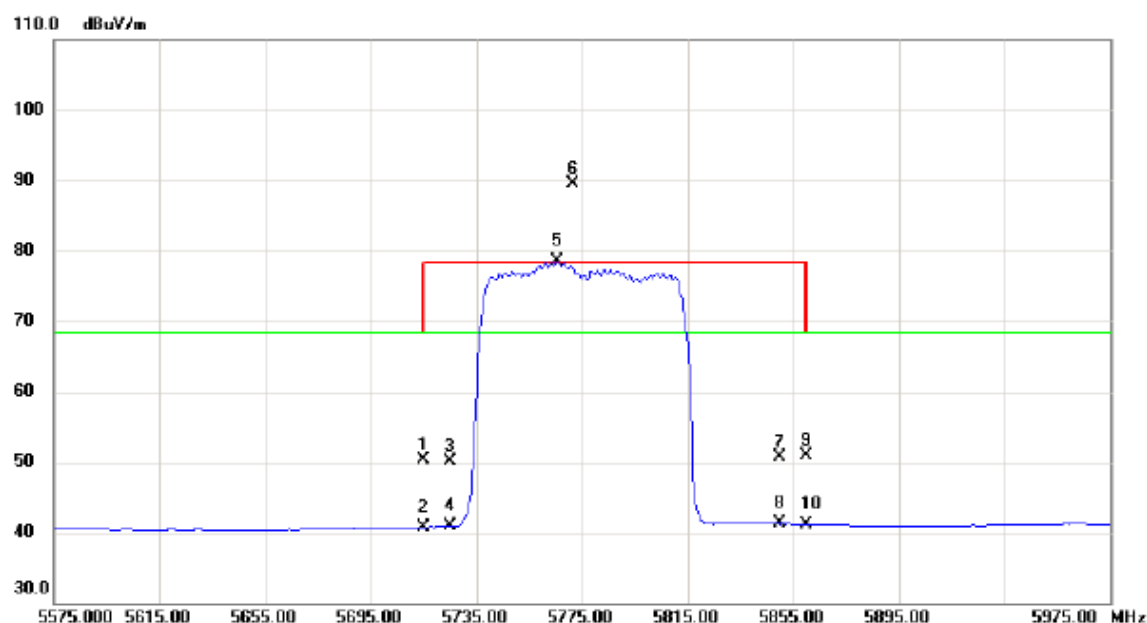


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	9.07	41.25	50.32	68.30	-17.98	peak	
2		5715.000	-0.47	41.25	40.78	68.30	-27.52	AVG	
3		5725.000	8.86	41.27	50.13	78.30	-28.17	peak	
4		5725.000	-0.44	41.27	40.83	68.30	-27.47	AVG	
5	X	5765.800	37.13	41.33	78.46	68.30	10.16	AVG	No Limit
6	*	5771.400	48.09	41.32	89.41	78.30	11.11	peak	No Limit
7		5850.000	9.35	41.44	50.79	78.30	-27.51	peak	
8		5850.000	-0.24	41.44	41.20	68.30	-27.10	AVG	
9		5860.000	9.49	41.45	50.94	68.30	-17.36	peak	
10		5860.000	-0.29	41.45	41.16	68.30	-27.14	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT80) Mode 5775MHz

Horizontal

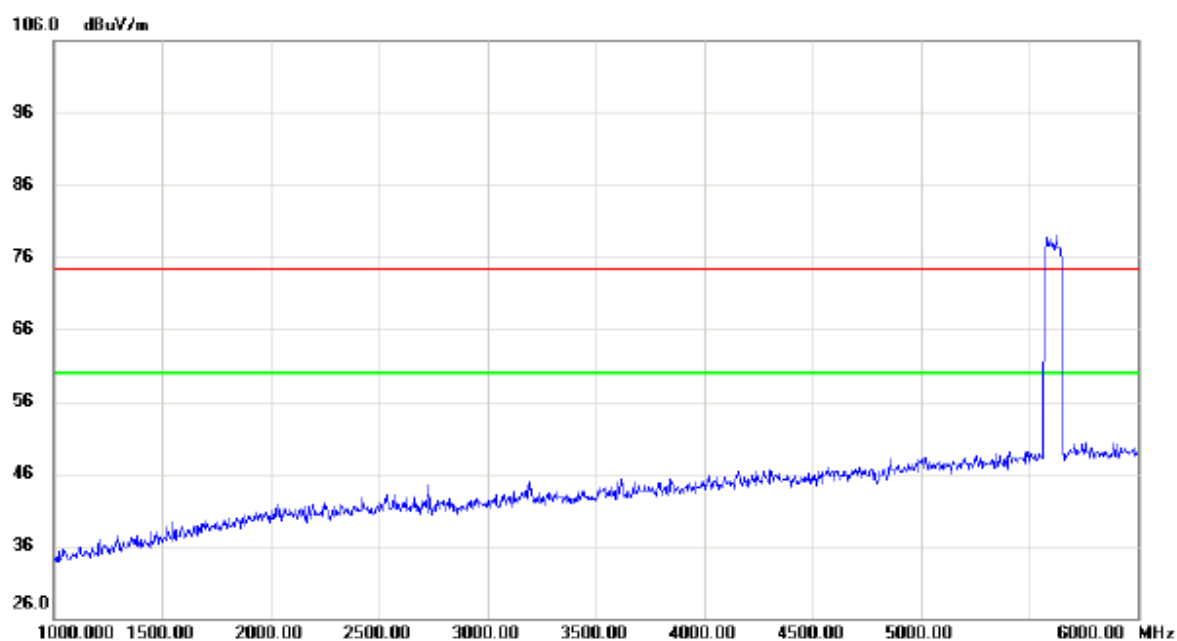


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

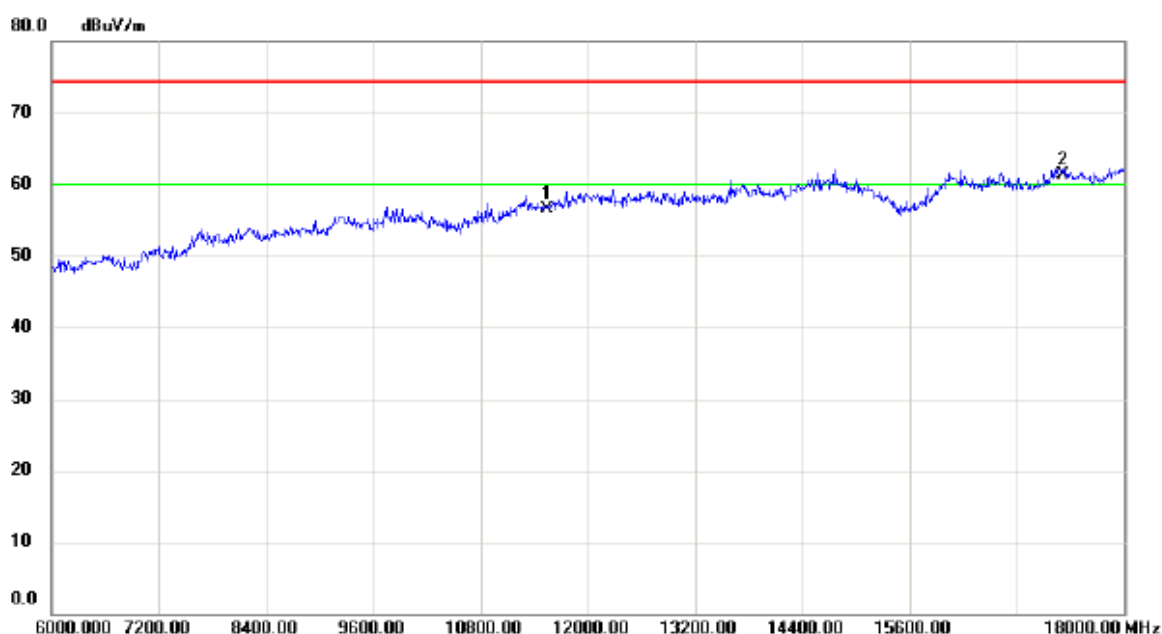


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	39.51	17.02	56.53	74.30	-17.77	peak	
2	*	17325.00	39.57	21.81	61.38	74.30	-12.92	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC(VHT80) Mode 5775MHz

Horizontal

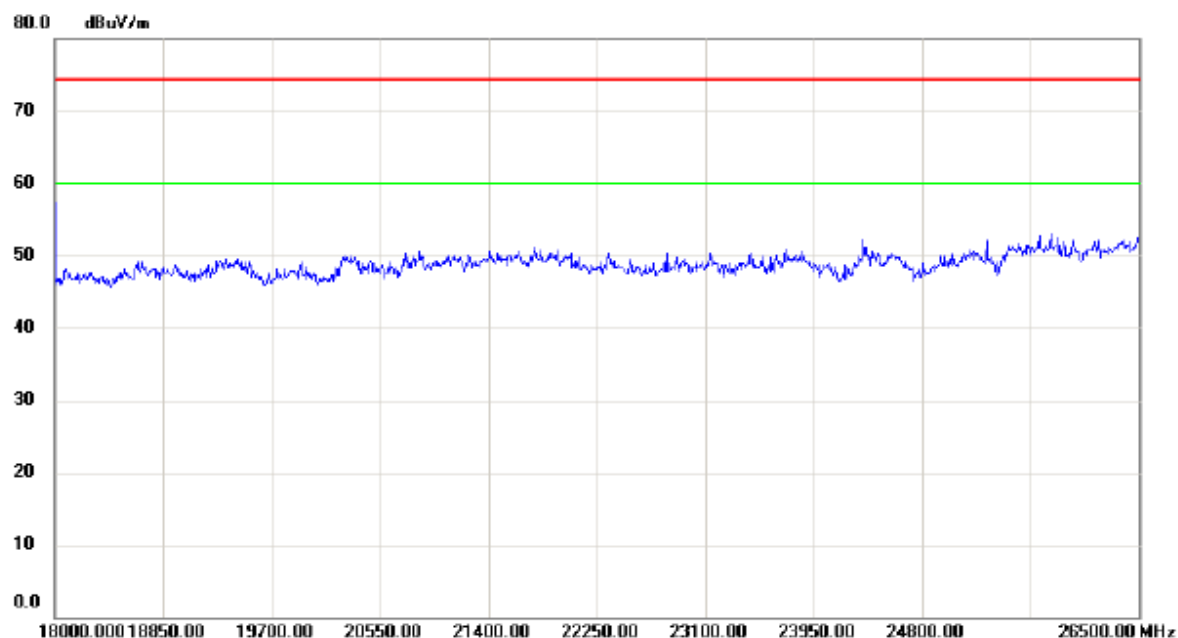


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

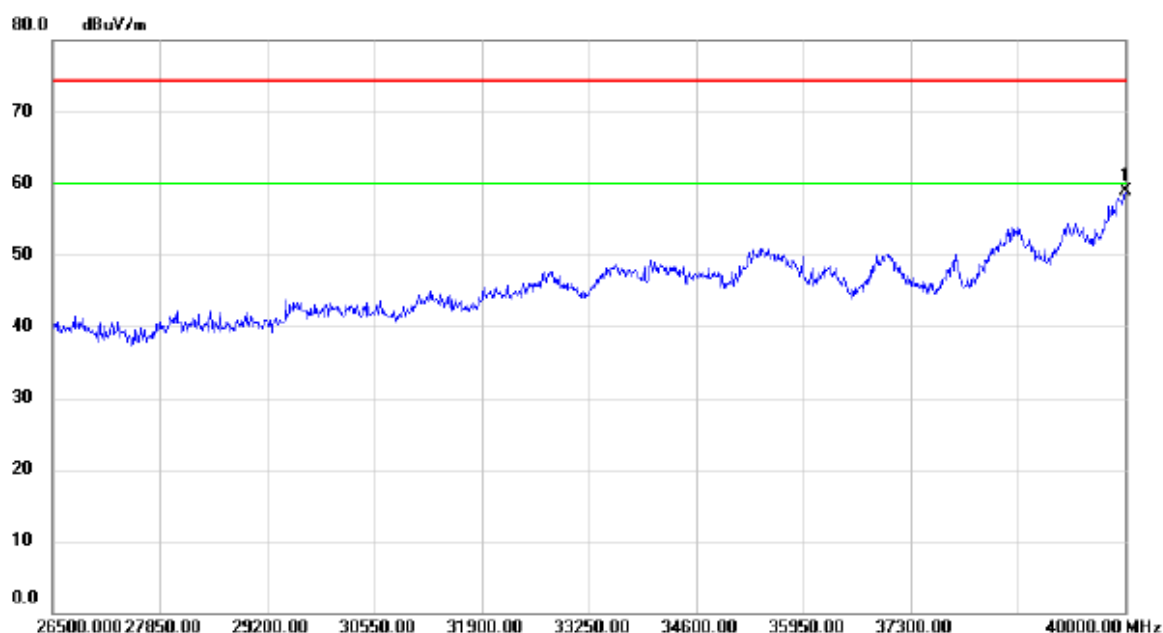

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	41.33	17.60	58.93	74.30	-15.37	peak	

TX A Mode_DUTY CYCLE

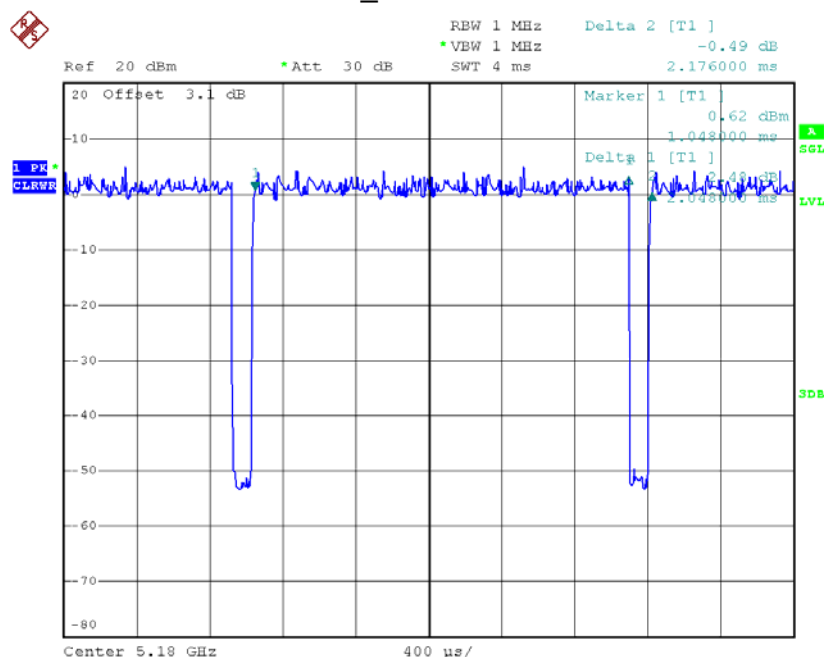

Date: 14.MAR.2016 13:42:08

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 2.048 msec

T_{Total} : 2.176 msec

Duty cycle: 94.12%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 0.26

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

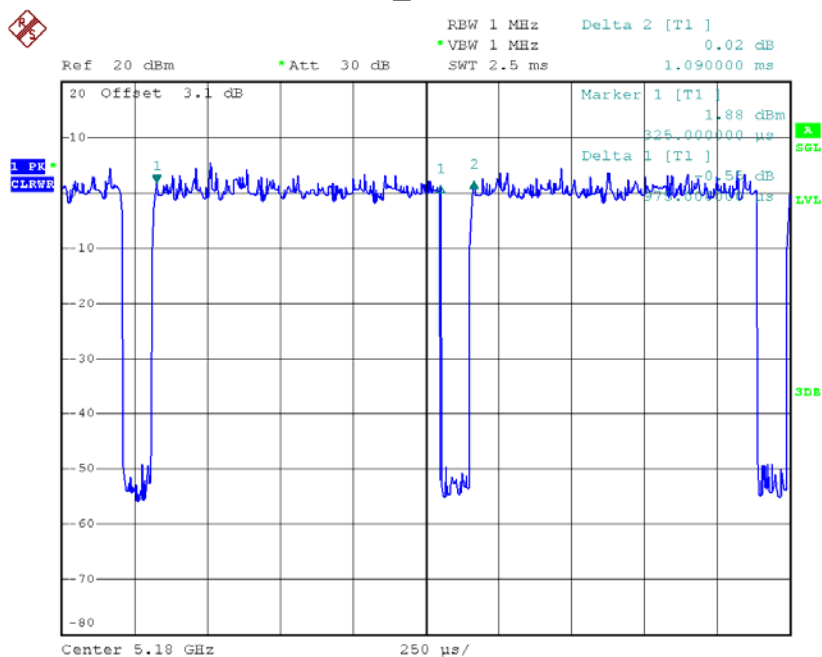

Date: 14.MAR.2016 13:42:46

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.975 msec

T_{Total} : 1.090msec

Duty cycle: 89.45%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.48

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

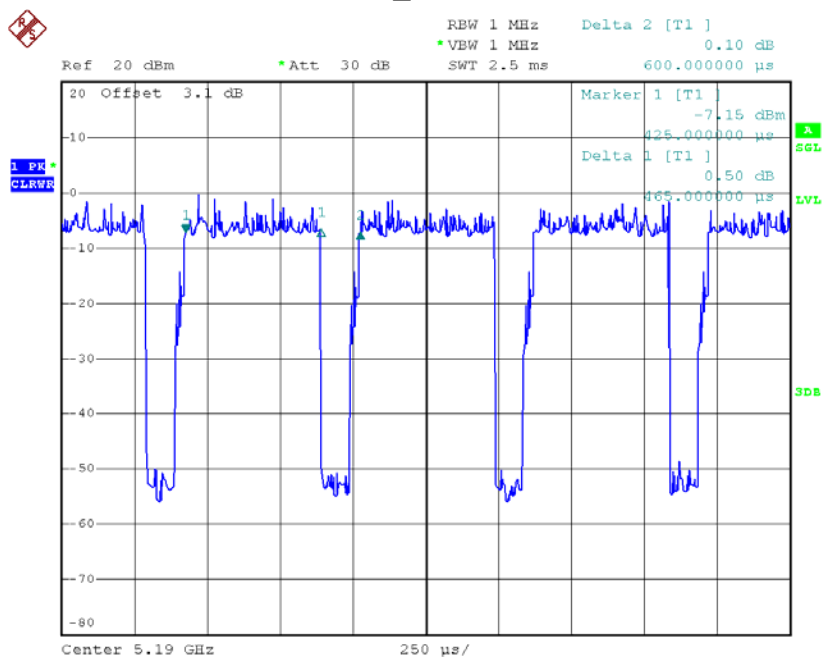

Date: 14.MAR.2016 13:45:29

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.465 msec

T_{Total} : 0.600 msec

Duty cycle: 77.5%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 1.11

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

$$\text{Output Power} = \text{Measured power} + \text{Ducy factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC(VHT20) Mode_DUTY CYCLE

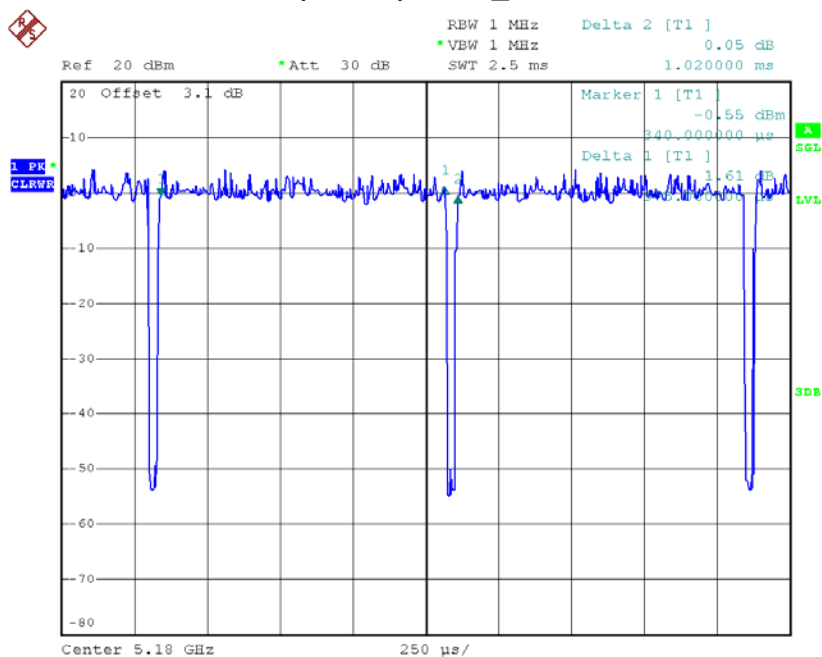

Date: 14.MAR.2016 13:50:37

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.975 msec

T_{Total} : 1.02 msec

Duty cycle: 95.6%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.20

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC(VHT40) Mode_DUTY CYCLE

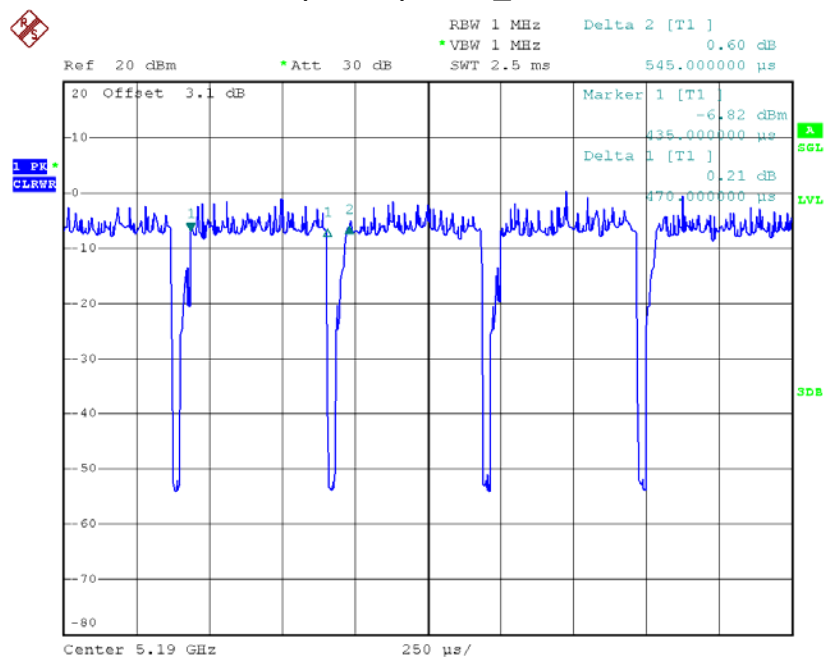

Date: 14.MAR.2016 13:56:37

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.47 msec

T_{Total} : 0.545 msec

Duty cycle: 86.24%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor =0.64

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC(VHT80) Mode_DUTY CYCLE

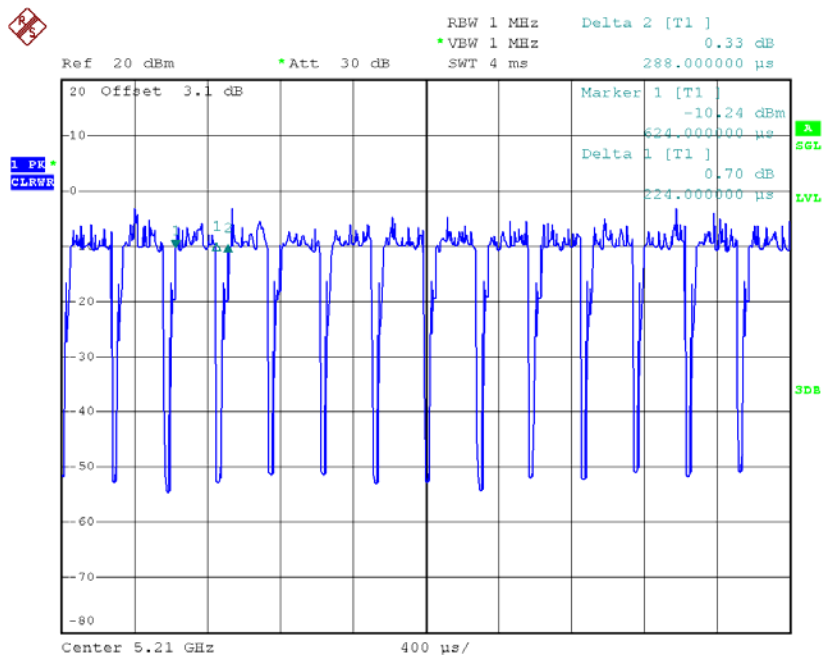

Date: 14.MAR.2016 13:54:47

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.224 msec

T_{Total} : 0.228 msec

Duty cycle:77.78%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.09

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.95	17.40
CH40	5200	21.95	17.40
CH48	5240	18.89	16.70

TX CH36

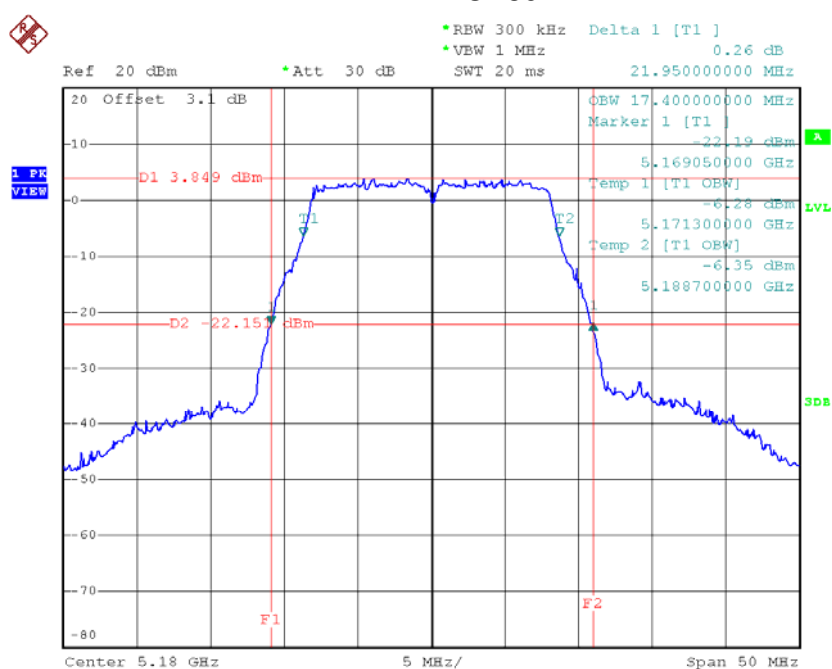


Date: 23.MAR.2016 09:05:29

TX CH40

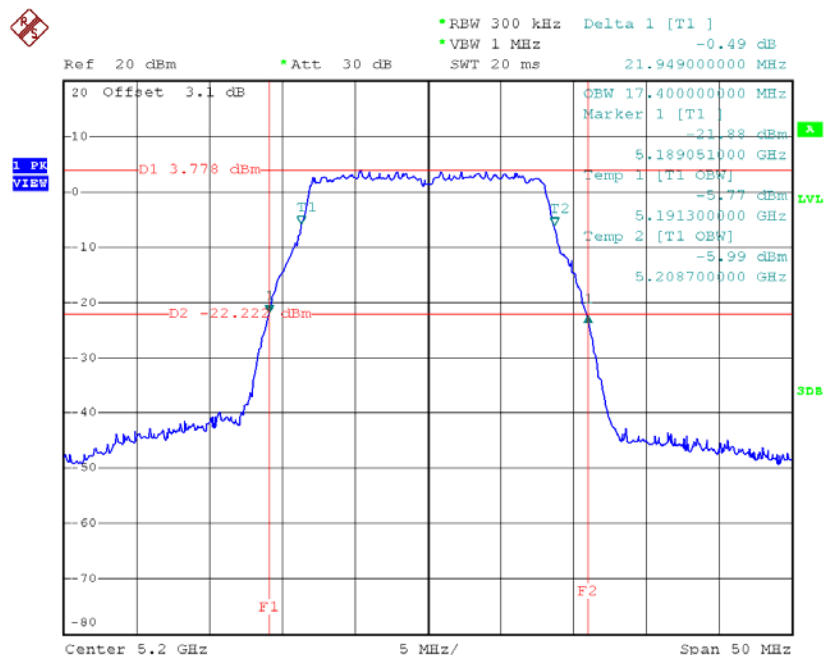

Date: 23.MAR.2016 09:11:01

TX CH48

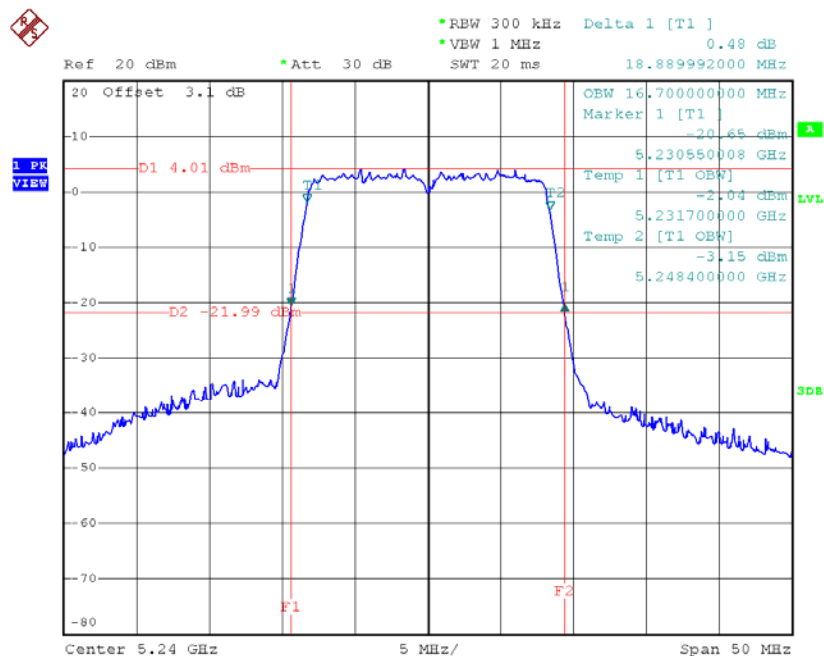


Date: 23.MAR.2016 09:11:57

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.89	18.10
CH40	5200	22.10	18.10
CH48	5240	19.25	17.50

TX CH36

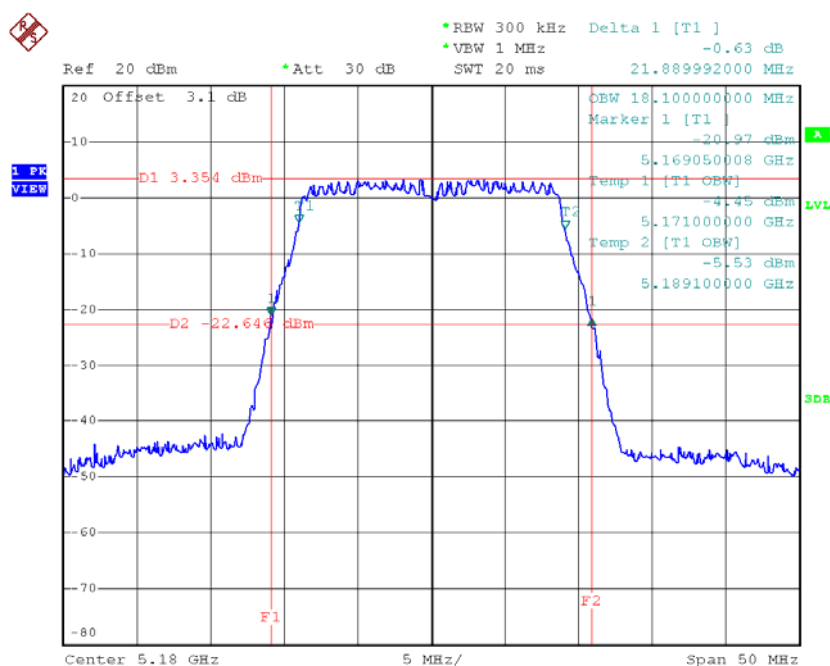


Date: 23.MAR.2016 11:06:53

TX CH40

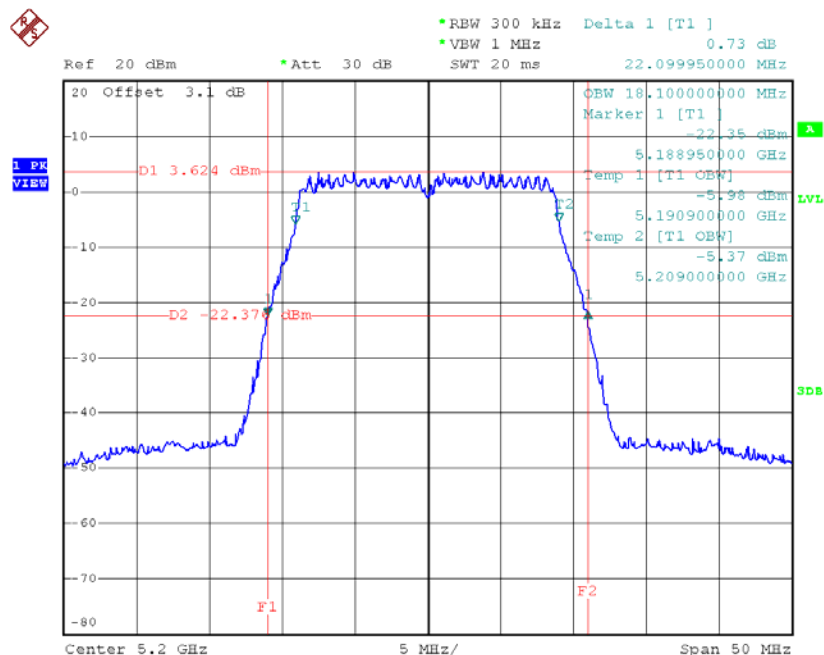

Date: 23.MAR.2016 11:08:55

TX CH48

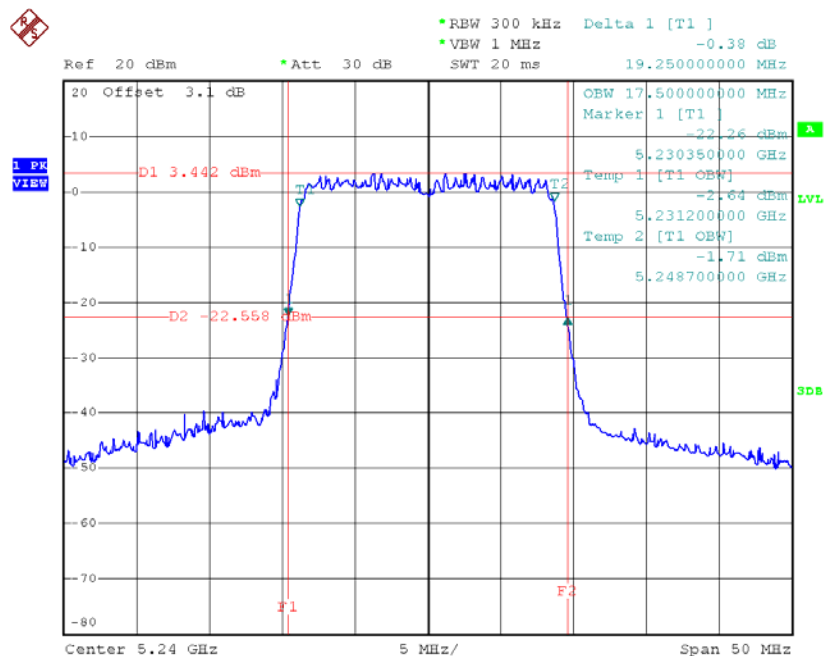


Date: 23.MAR.2016 11:10:36

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.61	36.40
CH46	5230	39.70	36.40

TX CH38

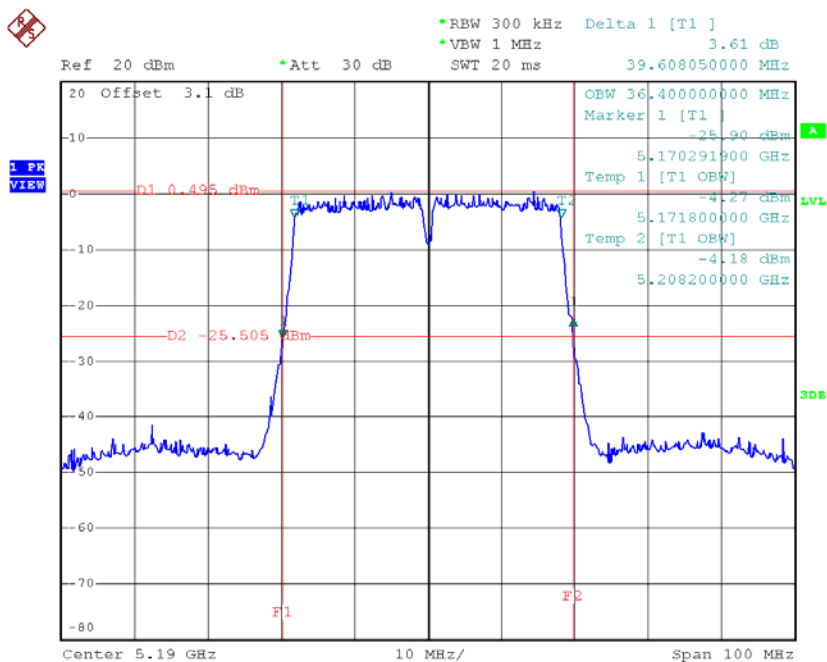

Date: 23.MAR.2016 11:15:51

TX CH46

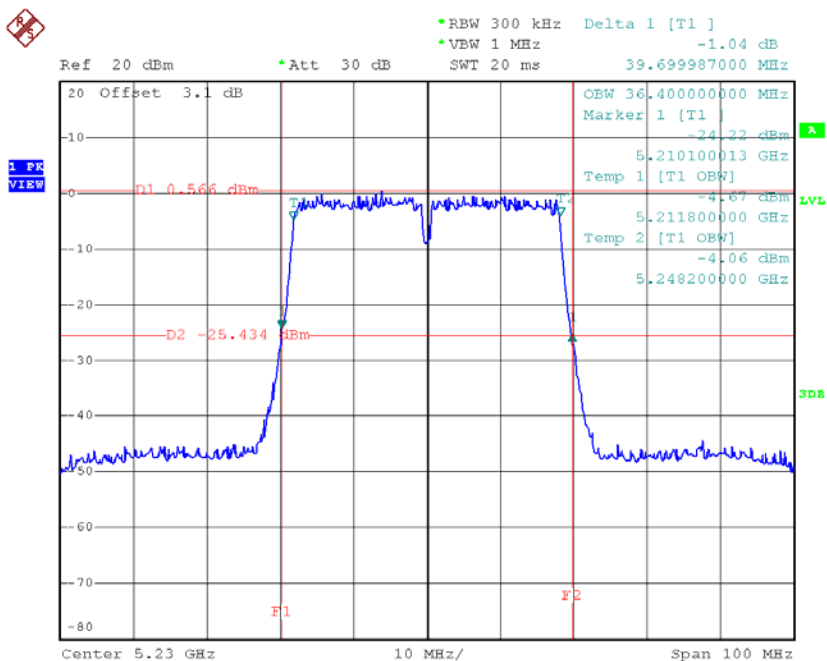


Date: 23.MAR.2016 11:17:26

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	18.90	16.80
CH60	5300	21.79	17.30
CH64	5320	21.95	17.40

TX CH52

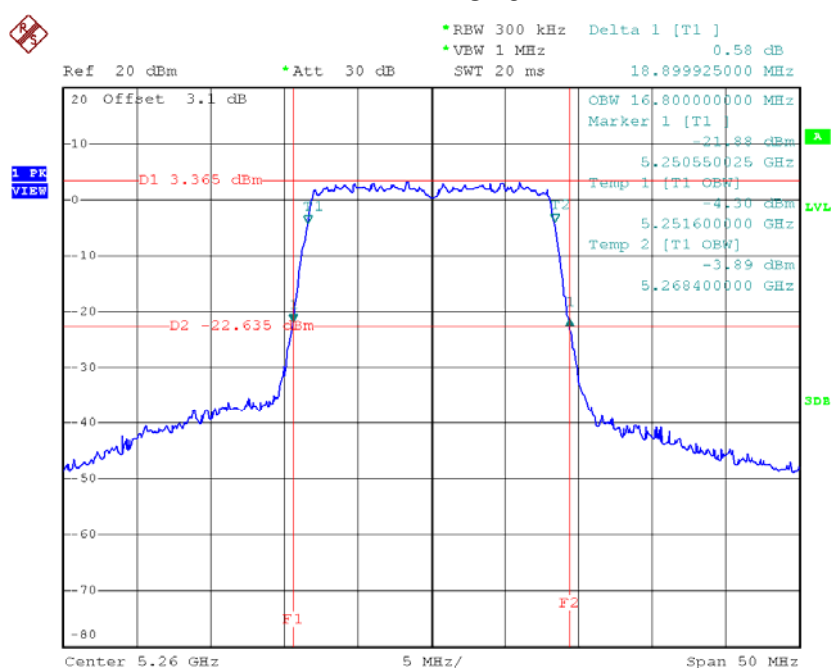


Date: 23.MAR.2016 09:15:44

TX CH60

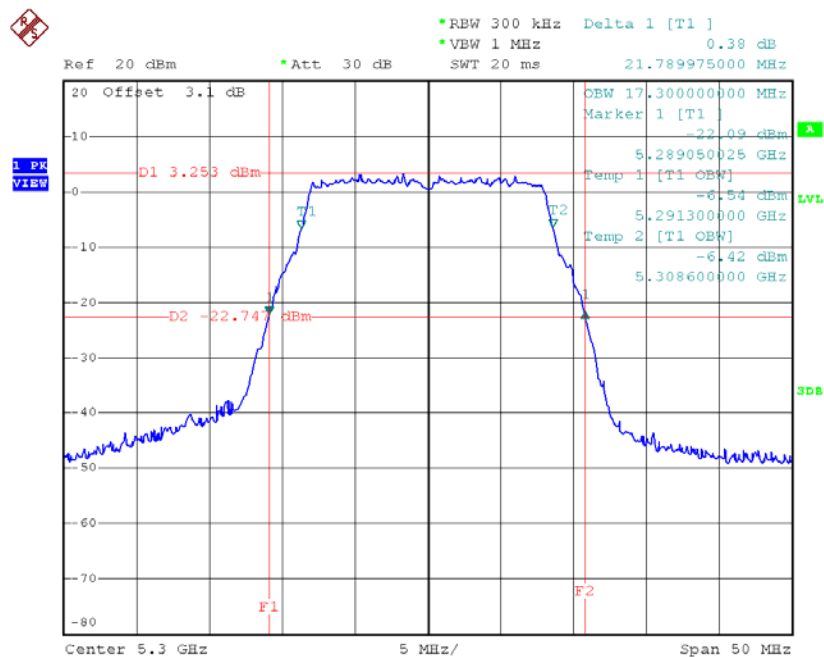

Date: 23.MAR.2016 09:20:32

TX CH64

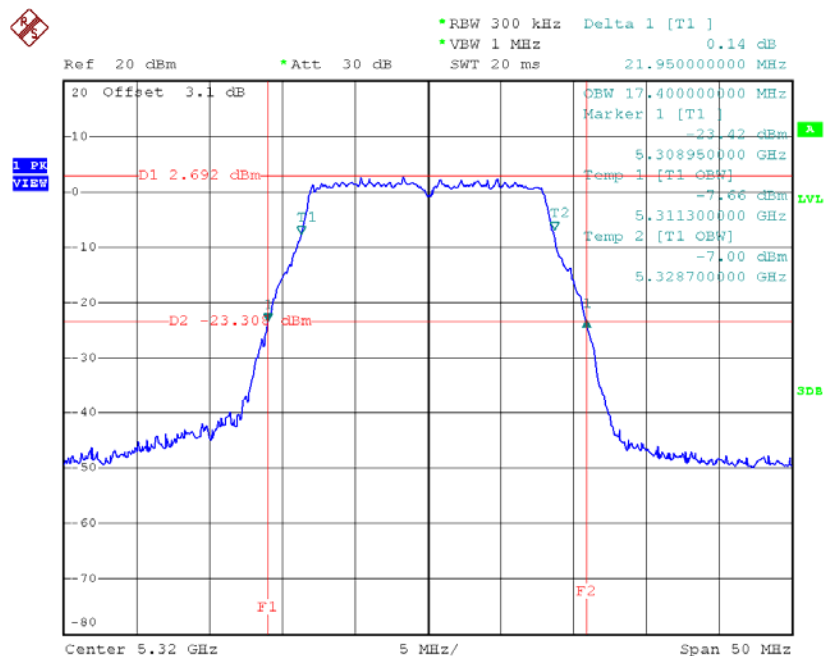


Date: 23.MAR.2016 09:21:47

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.20	17.60
CH60	5300	22.00	18.20
CH64	5320	22.09	18.20

TX CH52

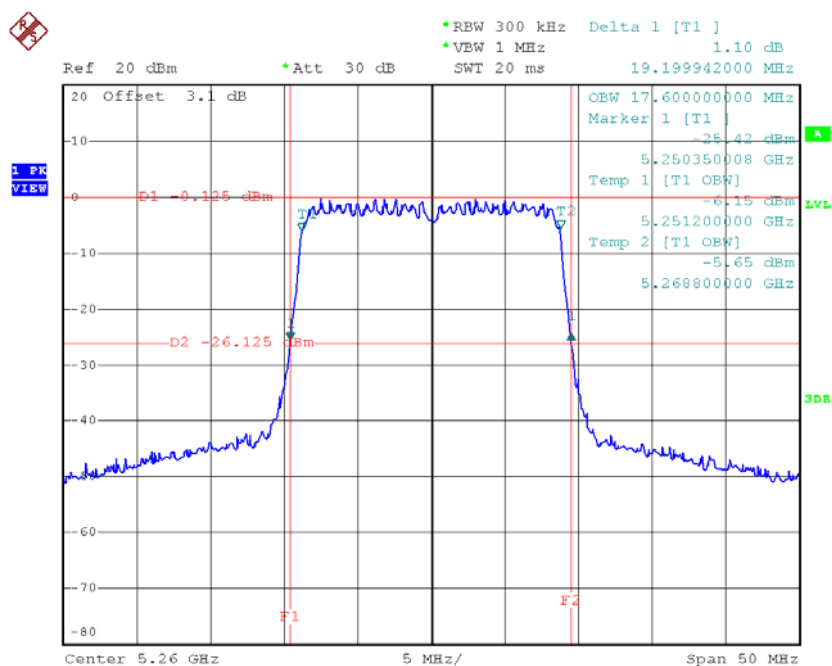


Date: 23.MAR.2016 09:48:40

TX CH60

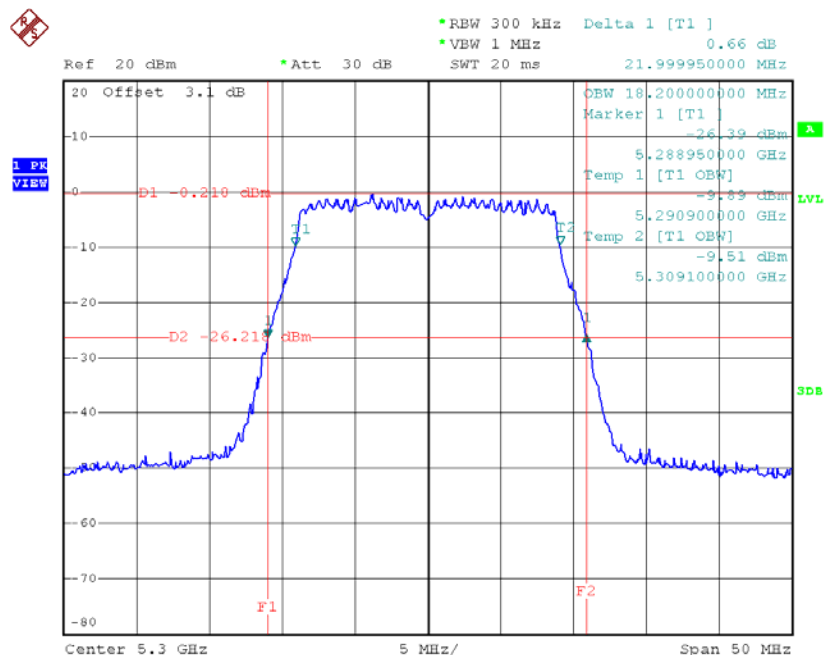

Date: 23.MAR.2016 09:50:09

TX CH64

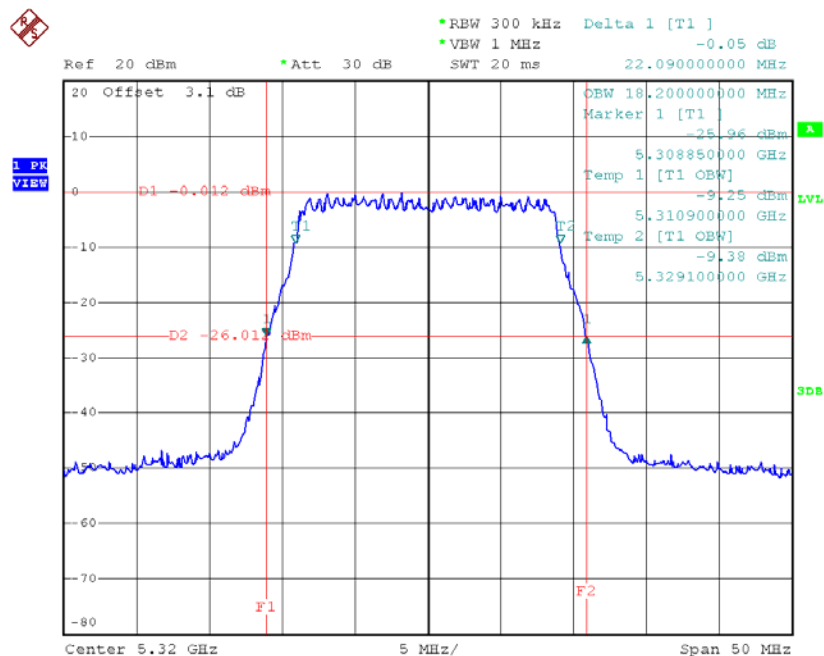


Date: 23.MAR.2016 09:51:27

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	39.80	36.40
CH62	5310	39.80	36.40

TX CH54

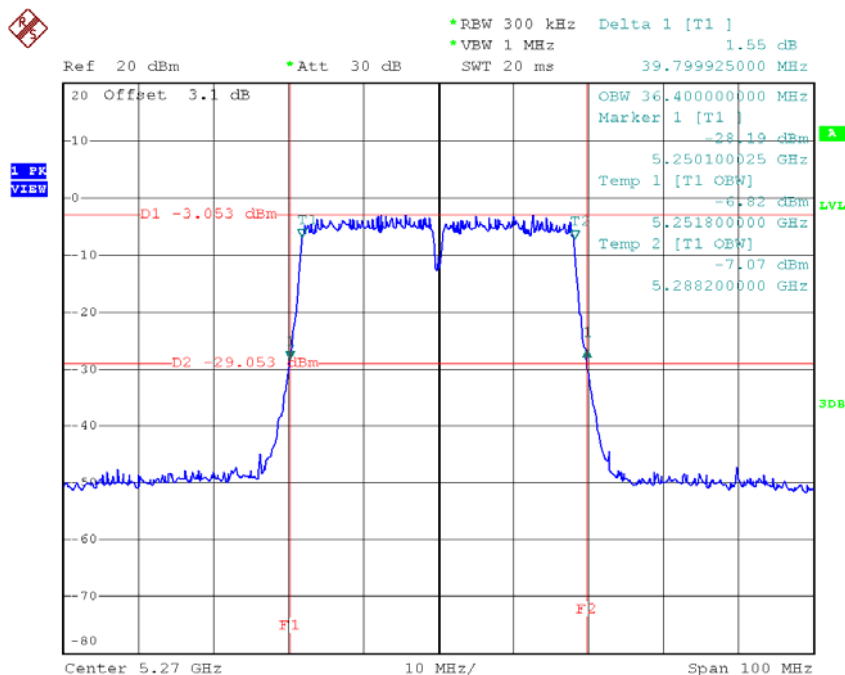

Date: 23.MAR.2016 10:30:48

TX CH62

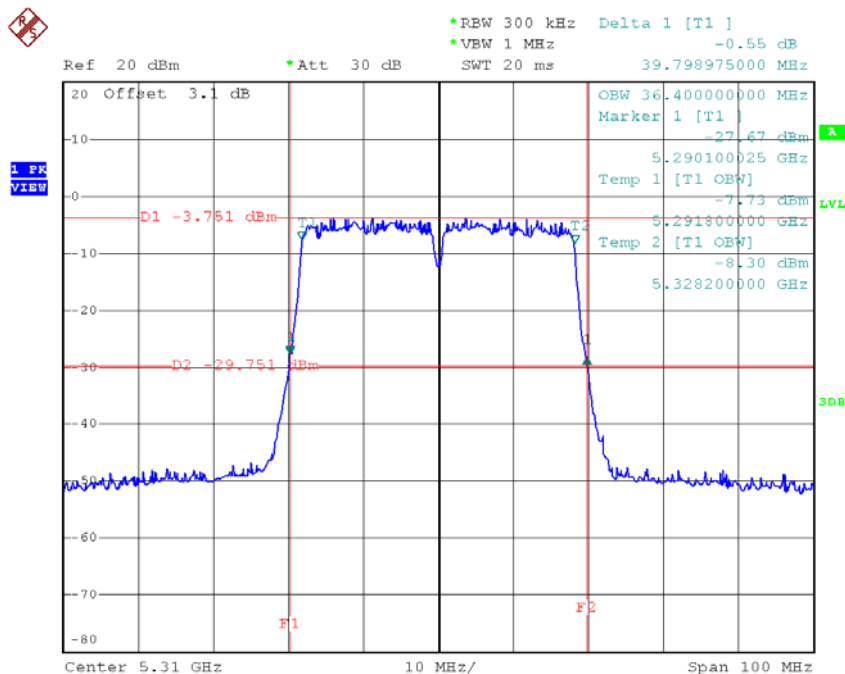


Date: 23.MAR.2016 10:32:39

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.81	17.30
CH116	5580	19.00	16.70
CH140	5700	21.95	17.40

TX CH100

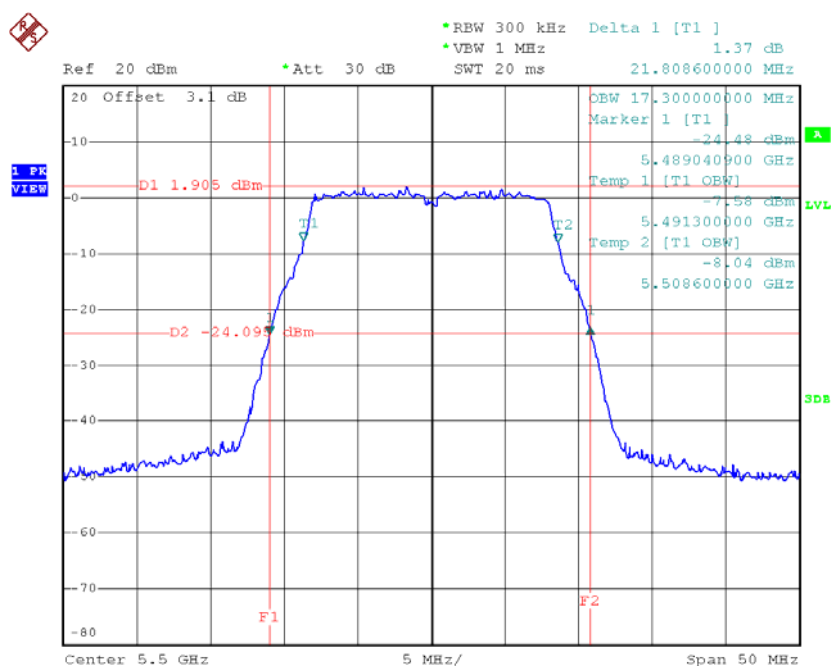


Date: 23.MAR.2016 09:23:19

TX CH116

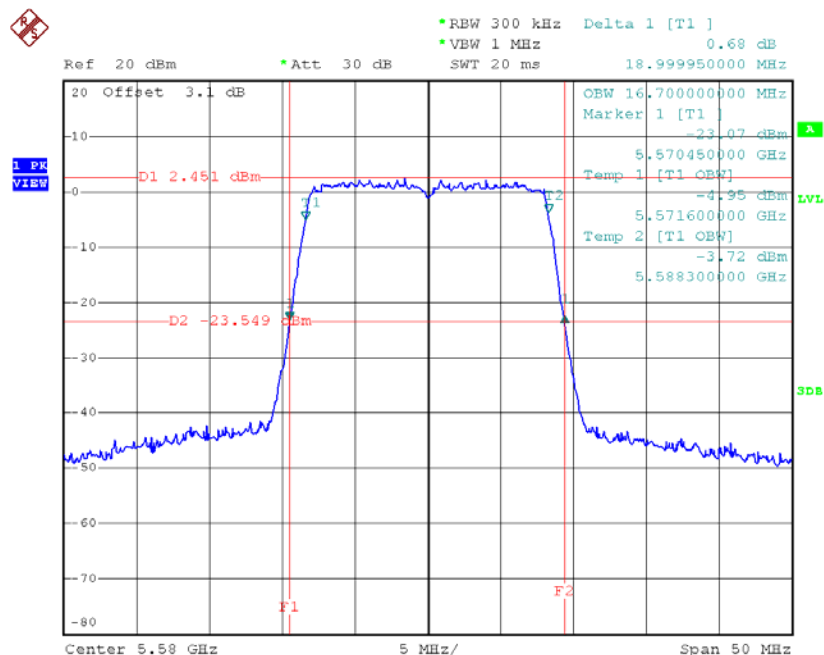


Date: 23.MAR.2016 09:29:59

TX CH140

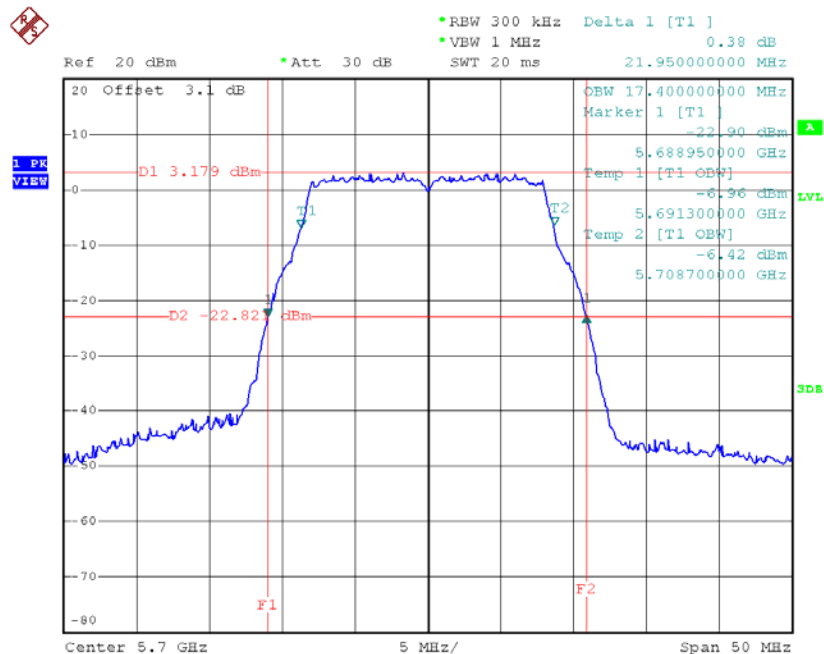


Date: 23.MAR.2016 09:31:22

TX CH116

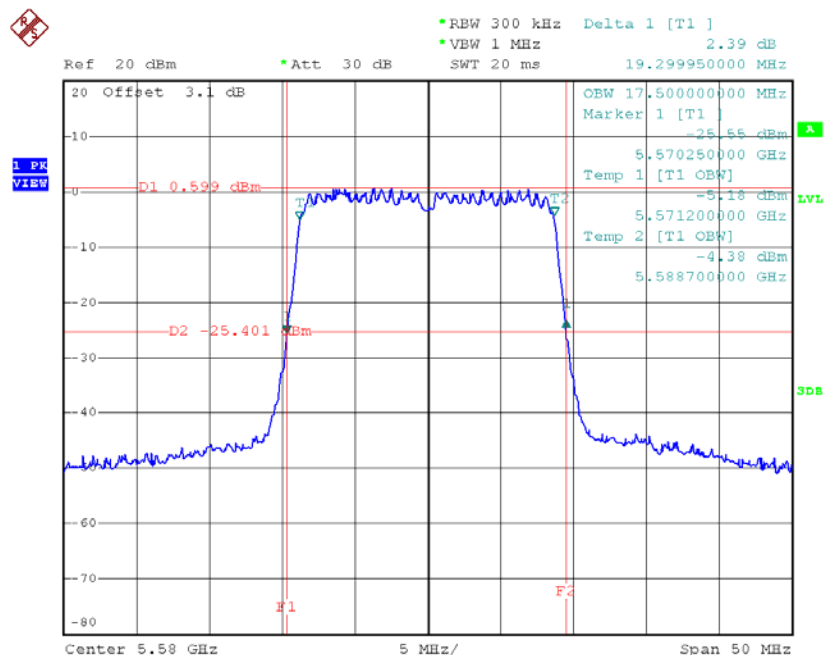

Date: 23.MAR.2016 09:54:18

TX CH140

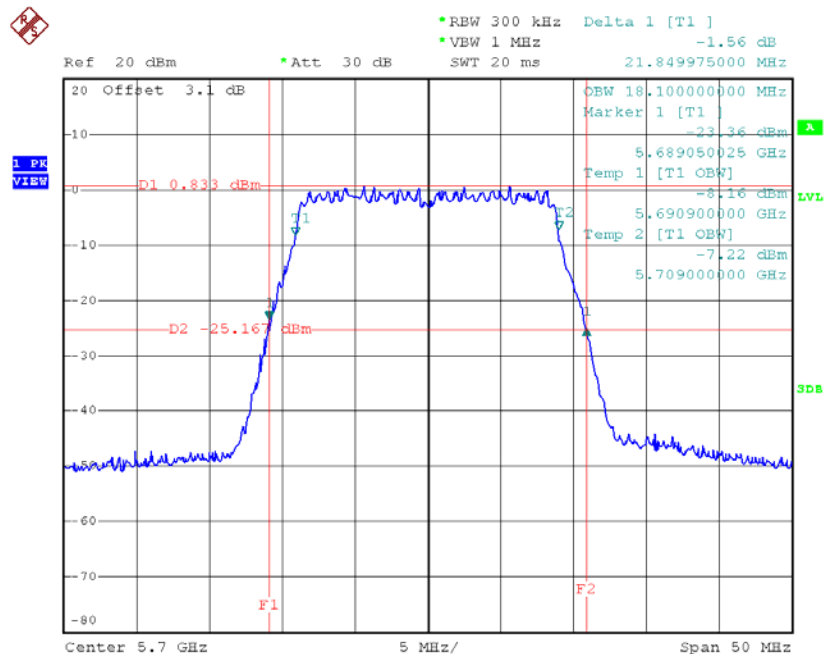


Date: 23.MAR.2016 09:55:20

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.79	36.20
CH110	5550	40.00	36.40
CH134	5670	39.70	36.40

TX CH102

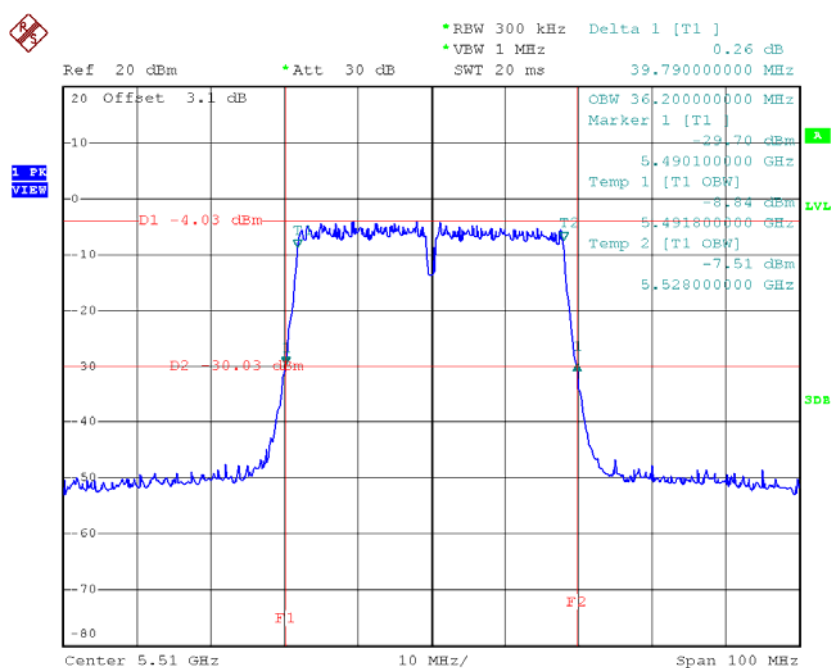


Date: 23.MAR.2016 10:34:11

TX CH110

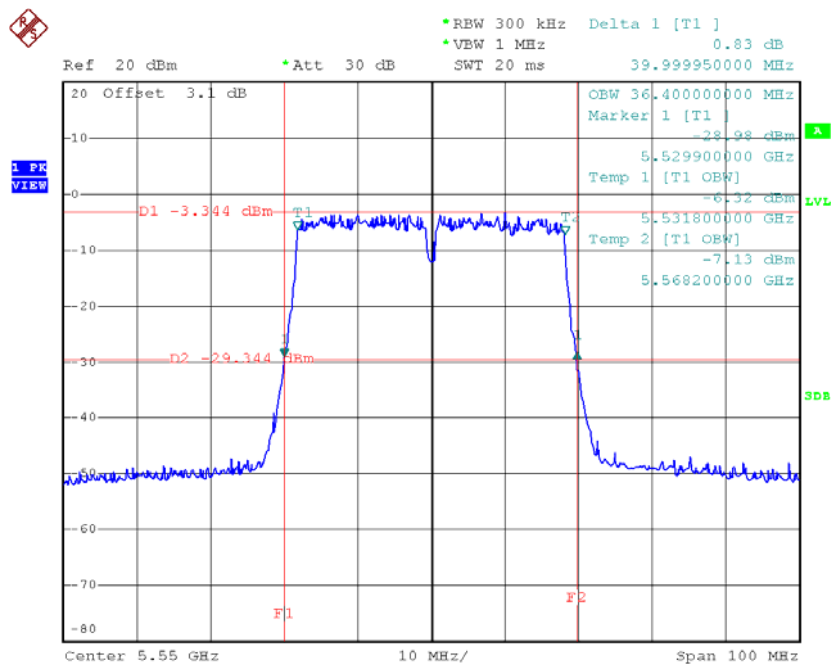

Date: 23.MAR.2016 10:36:20

TX CH134

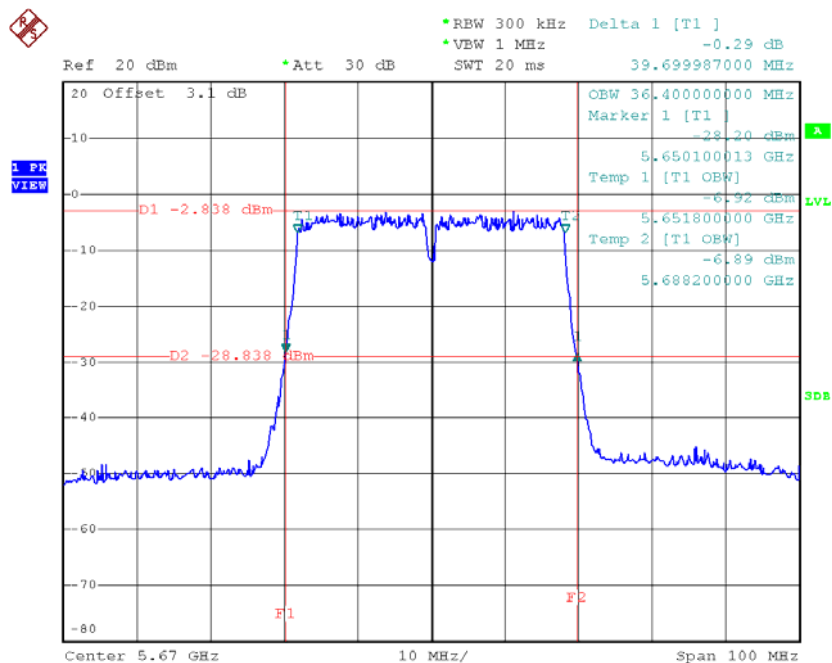


Date: 23.MAR.2016 10:37:42

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.40	>=500
CH157	5785	16.49	16.60	>=500
CH165	5825	16.45	16.60	>=500

TX CH 149

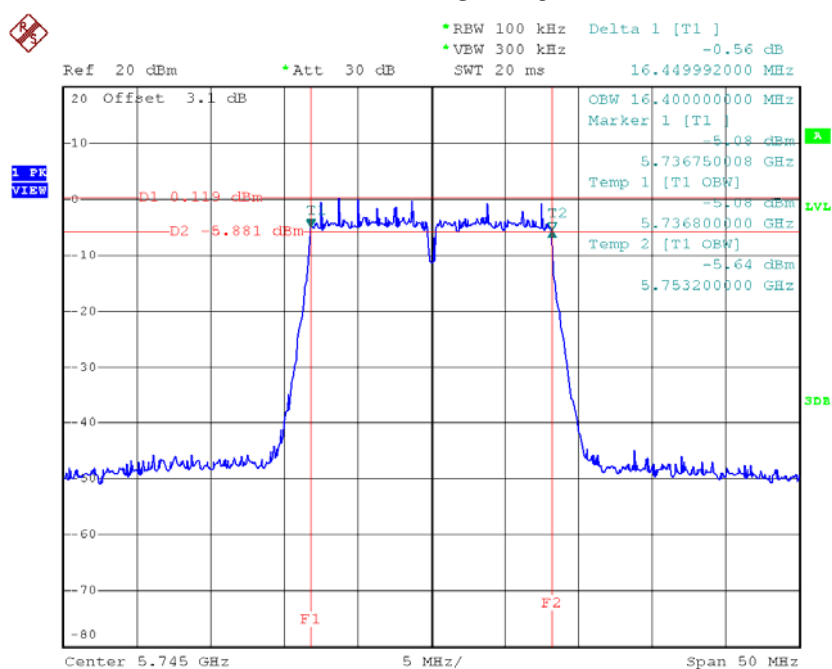


Date: 23.MAR.2016 09:32:59

TX CH 157

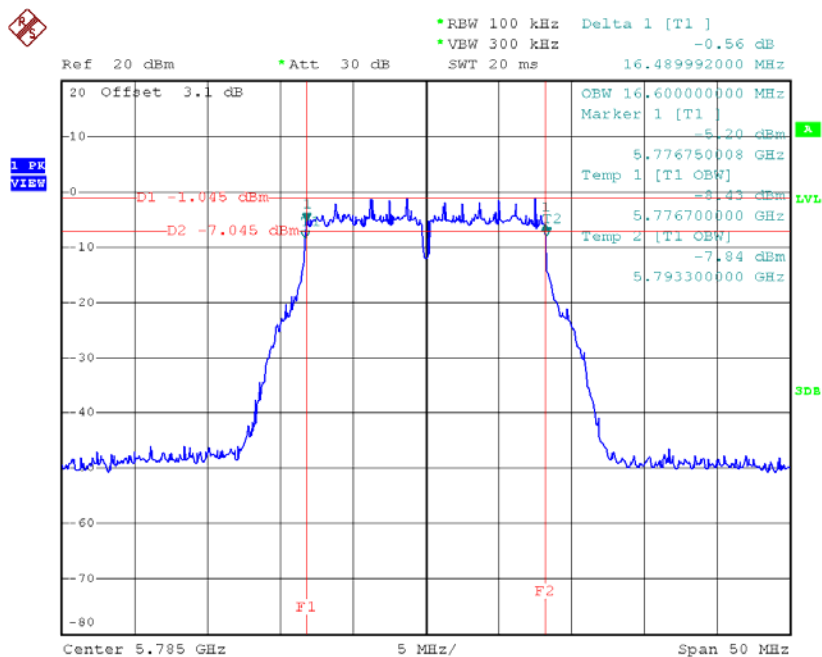

Date: 23.MAR.2016 09:39:10

TX CH 165

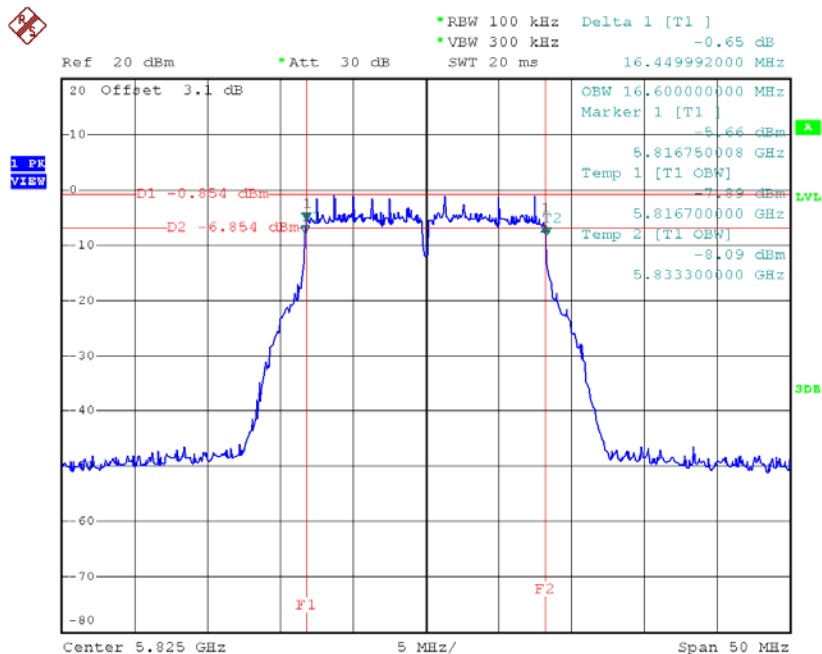


Date: 23.MAR.2016 09:40:28

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.15	17.40	>=500
CH157	5785	17.65	17.80	>=500
CH165	5825	17.65	17.80	>=500

TX CH 149

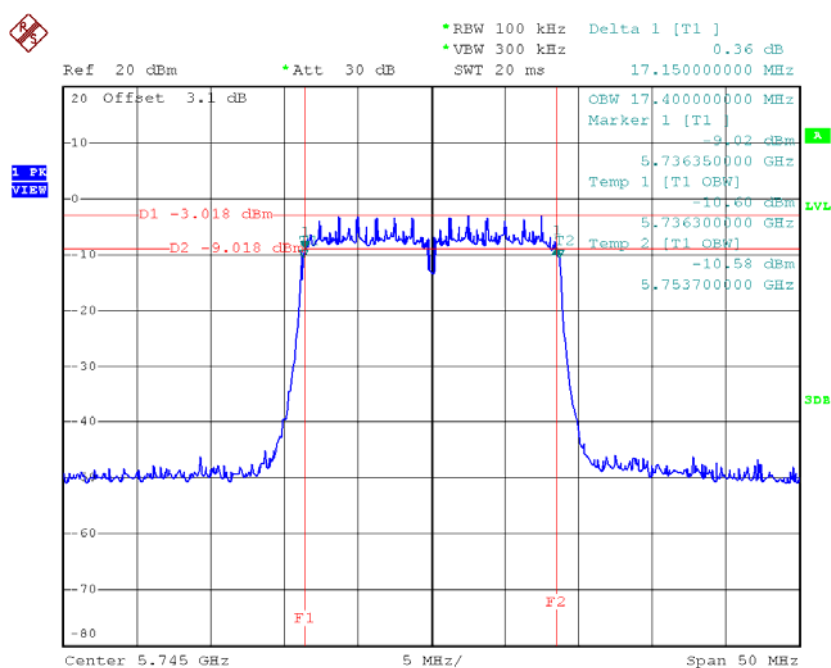


Date: 23.MAR.2016 09:56:36

TX CH 157

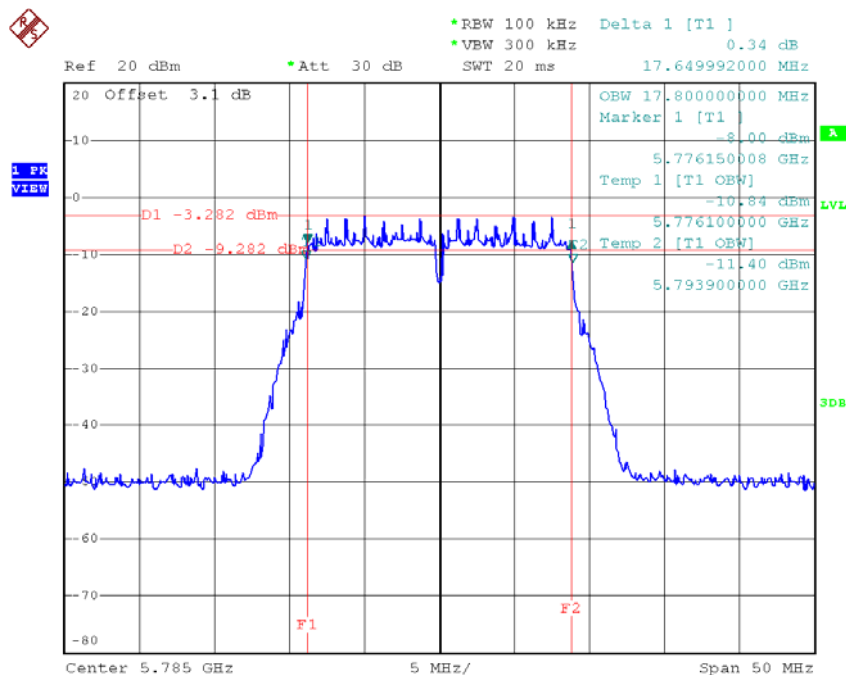

Date: 23.MAR.2016 09:57:52

TX CH 165

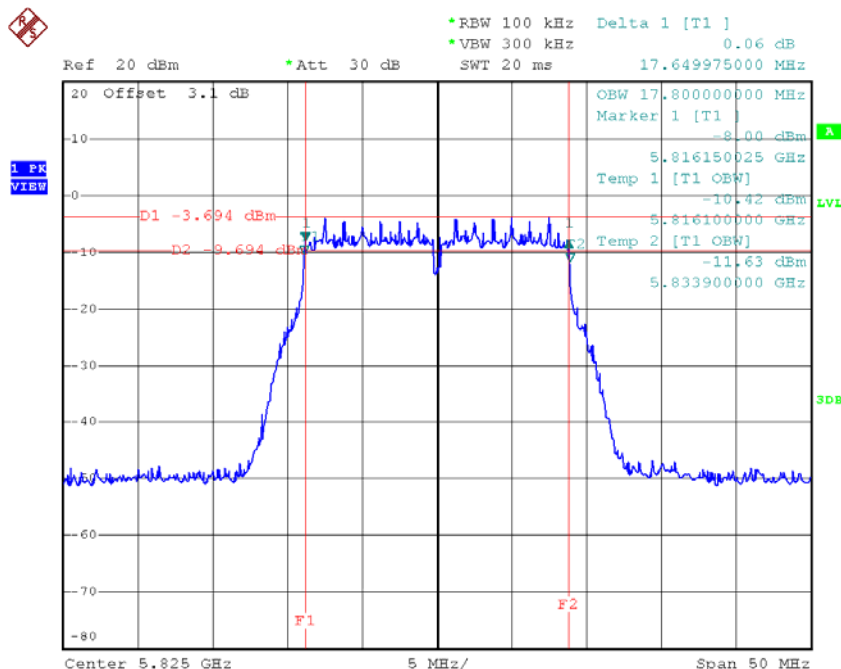


Date: 23.MAR.2016 09:58:57

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

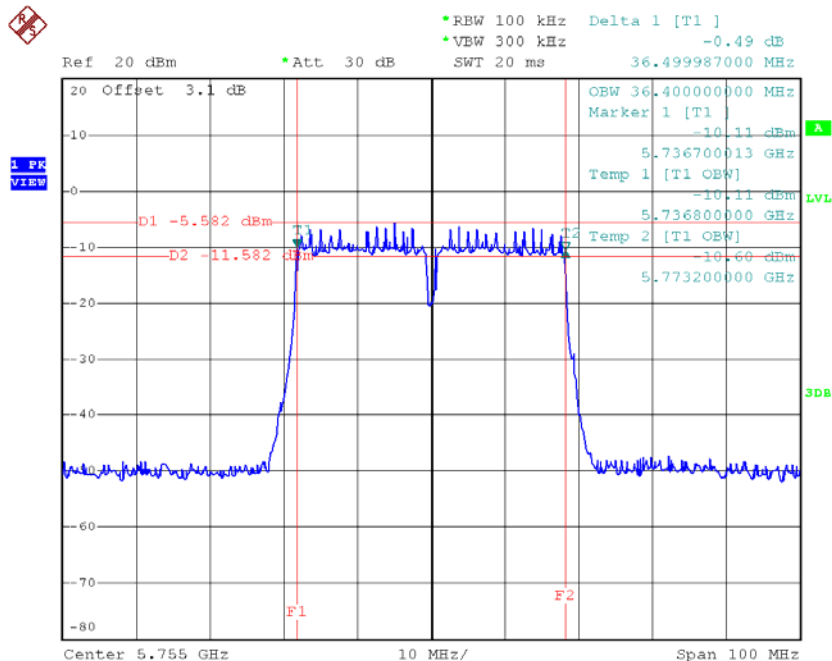

Date: 23.MAR.2016 10:42:43

TX CH 159

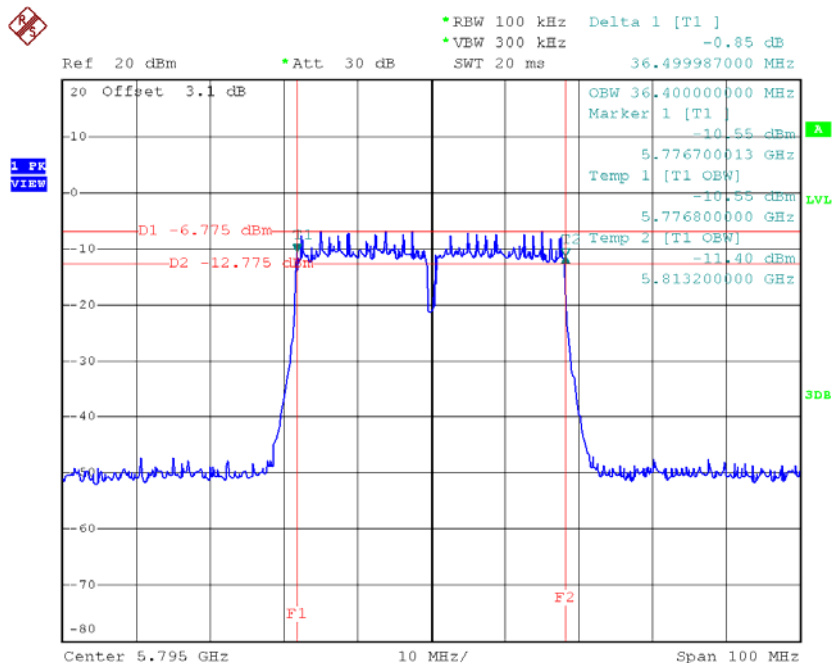


Date: 23.MAR.2016 10:44:03

Test Mode: UNII-1/TX AC(VHT20) Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.95	18.20
CH40	5200	22.30	18.20
CH48	5240	19.35	17.60

TX CH36

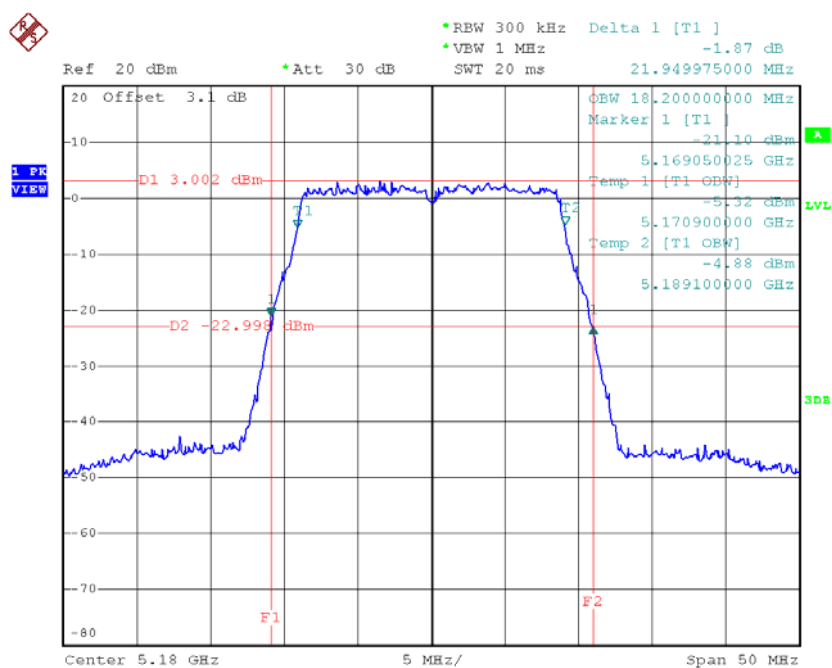


Date: 23.MAR.2016 11:12:01

TX CH40

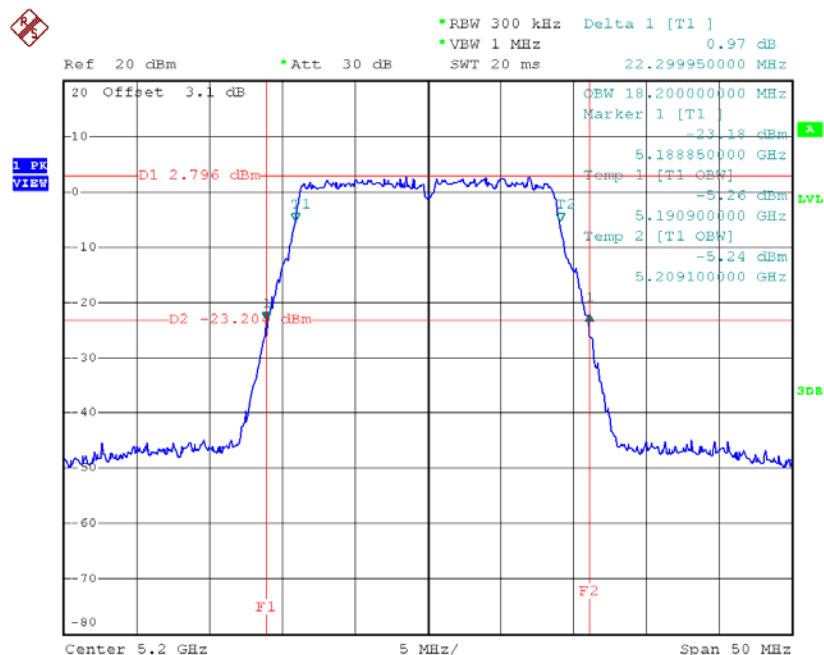

Date: 23.MAR.2016 11:13:09

TX CH48

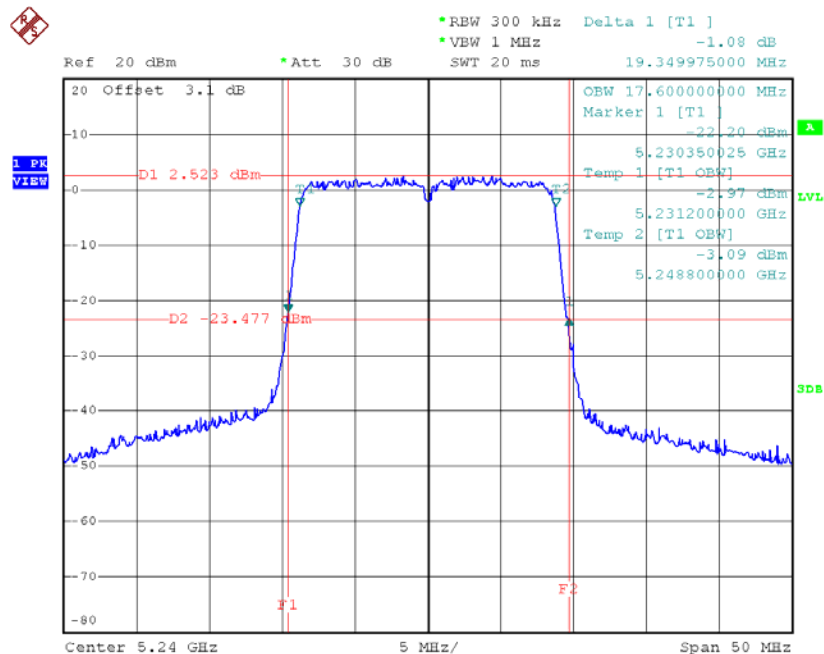


Date: 23.MAR.2016 11:14:22

Test Mode: UNII-1/TX AC(VHT40) Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.59	36.40
CH46	5230	39.79	36.40

TX CH38

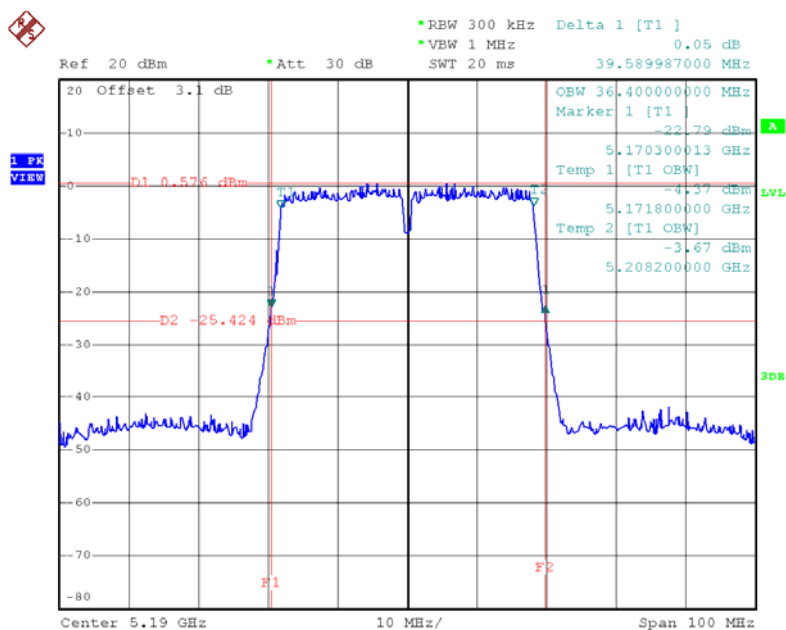

Date: 23.MAR.2016 11:18:56

TX CH46

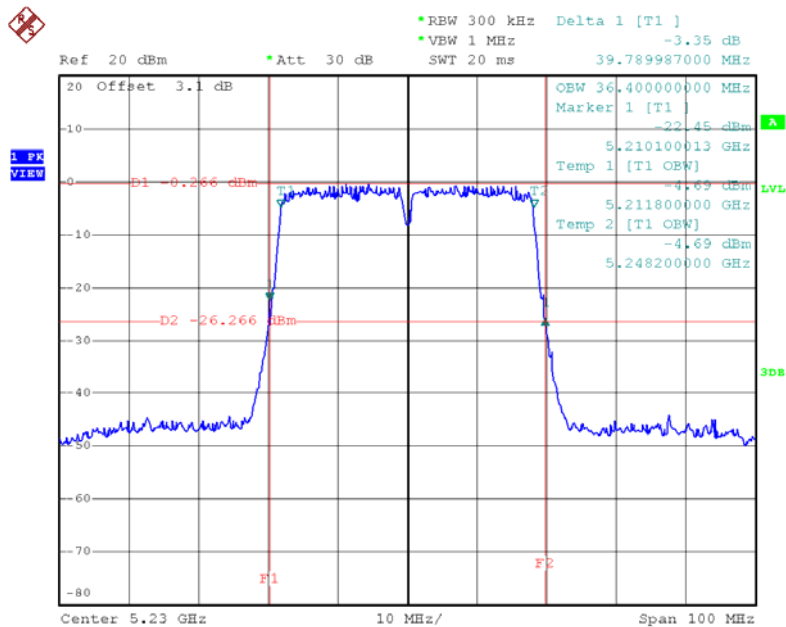


Date: 23.MAR.2016 11:20:05

Test Mode: UNII-1/TX AC(VHT80) Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	81.00	76.00

TX CH42

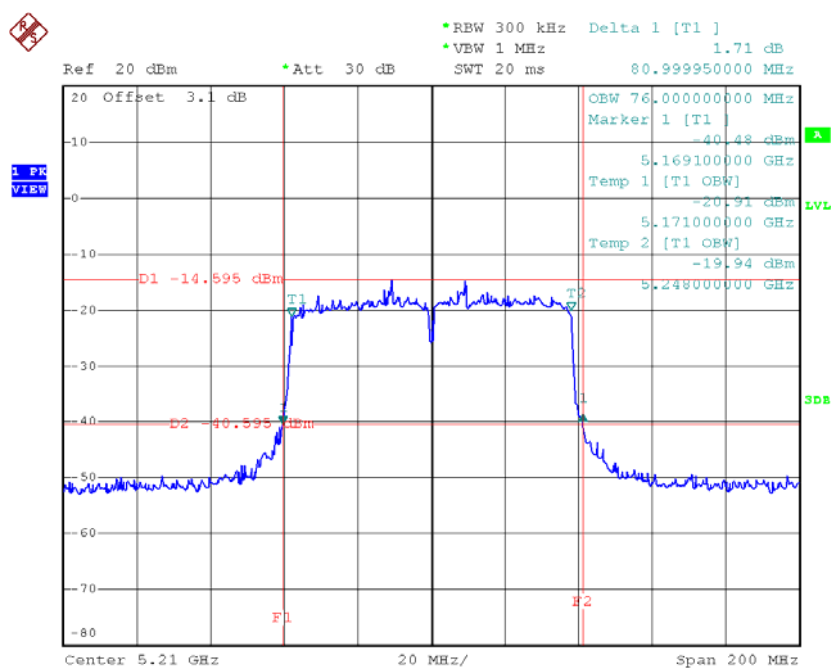


Date: 17.MAR.2016 11:10:01

Test Mode: UNII-2A/TX AC(VHT20) Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.31	17.60
CH60	5300	22.00	18.10
CH64	5320	22.15	18.10

TX CH52

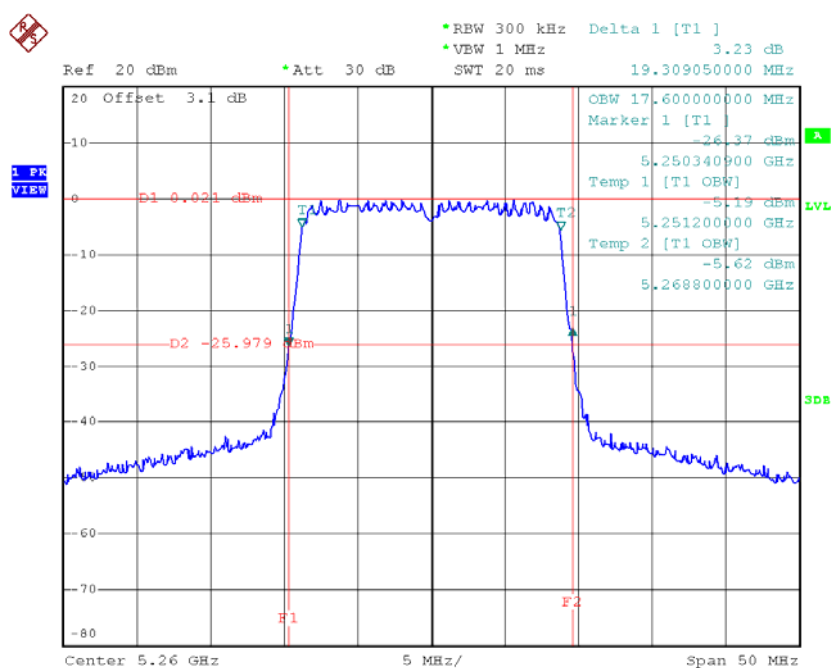


Date: 23.MAR.2016 10:18:07

TX CH60

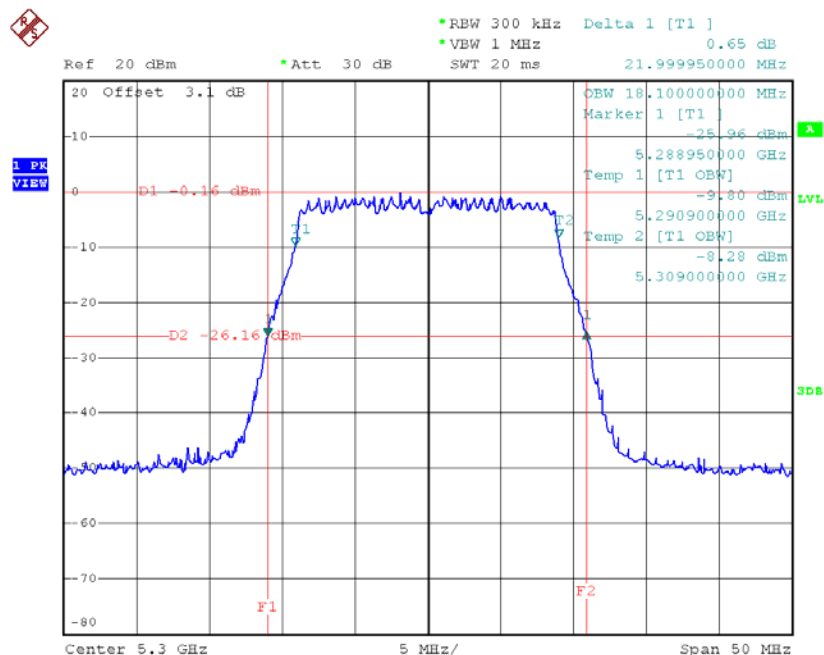

Date: 23.MAR.2016 10:19:26

TX CH64

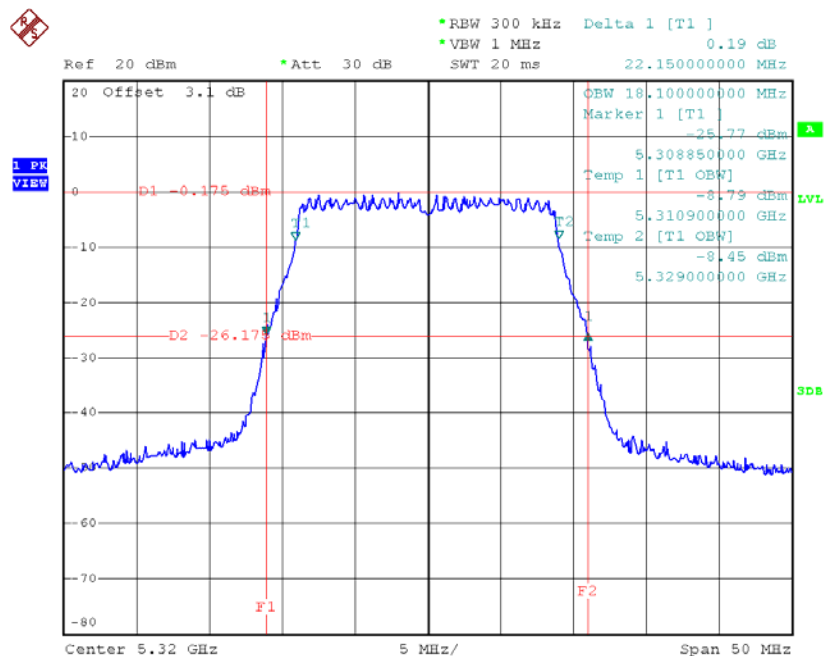


Date: 23.MAR.2016 10:20:51

Test Mode: UNII-2A/TX AC(VHT40) Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	39.60	36.40
CH62	5310	40.00	36.40

TX CH54

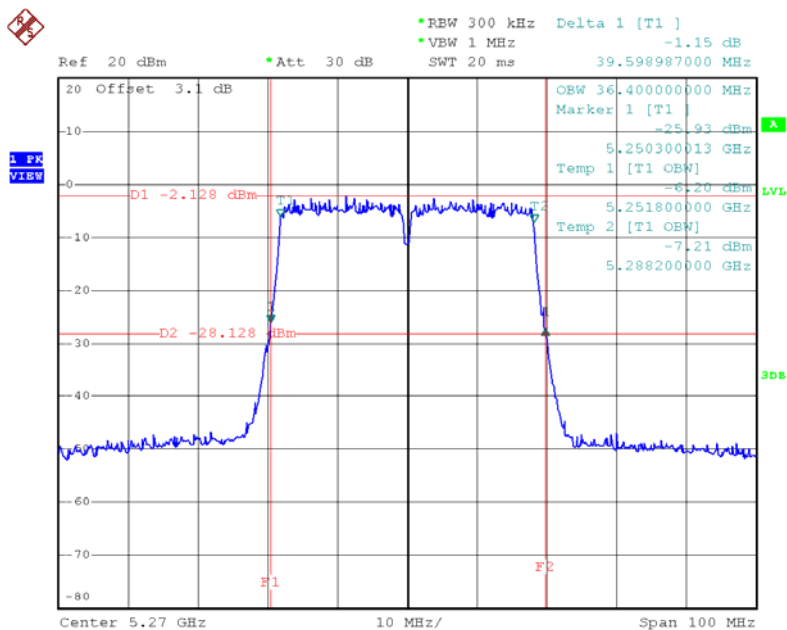

Date: 23.MAR.2016 10:45:33

TX CH62

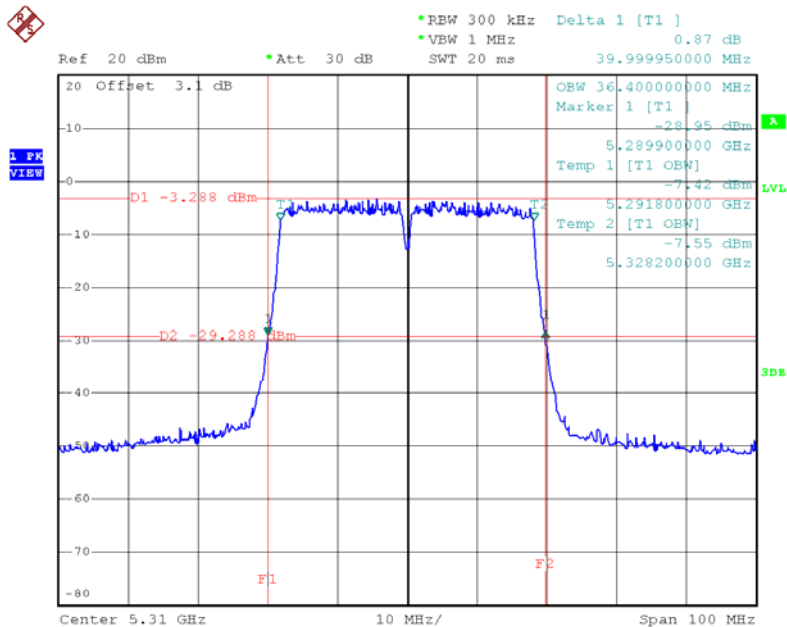


Date: 23.MAR.2016 10:47:24

Test Mode: UNII-2A/TX AC(VHT80) Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	80.81	76.00

TX CH58

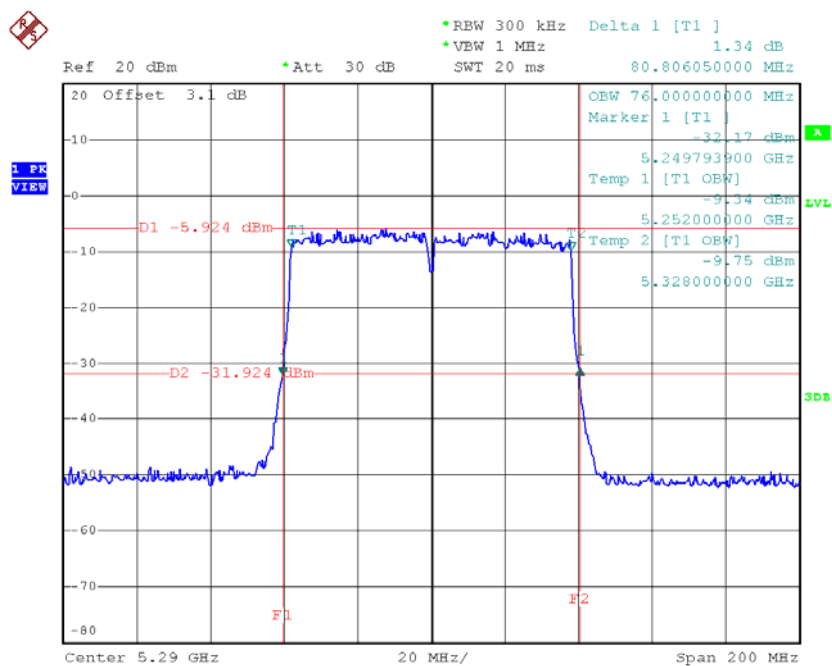


Date: 23.MAR.2016 11:04:02

Test Mode: UNII-2C/TX AC(VHT20) Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.99	18.10
CH116	5580	19.25	17.50
CH140	5700	21.91	18.20

TX CH100

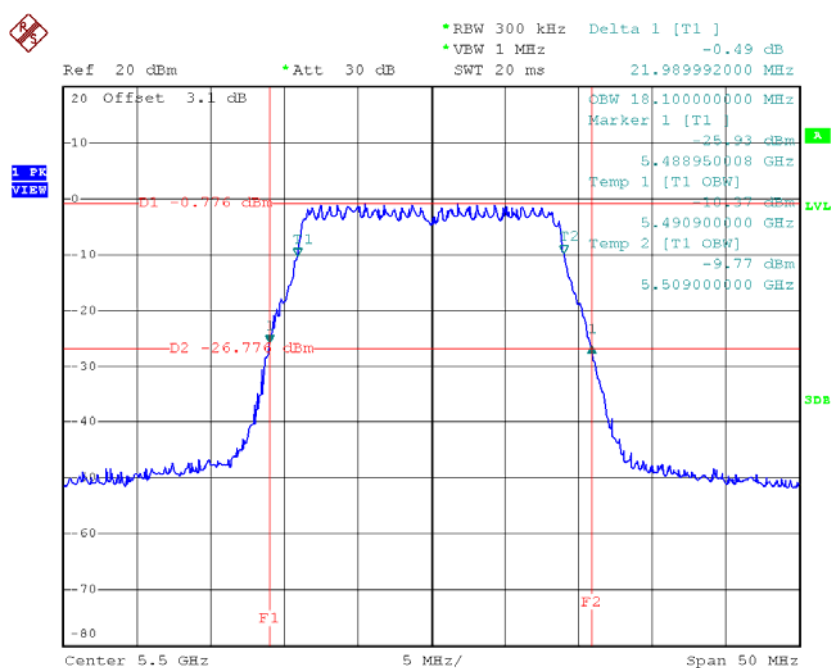


Date: 23.MAR.2016 10:22:03

TX CH116

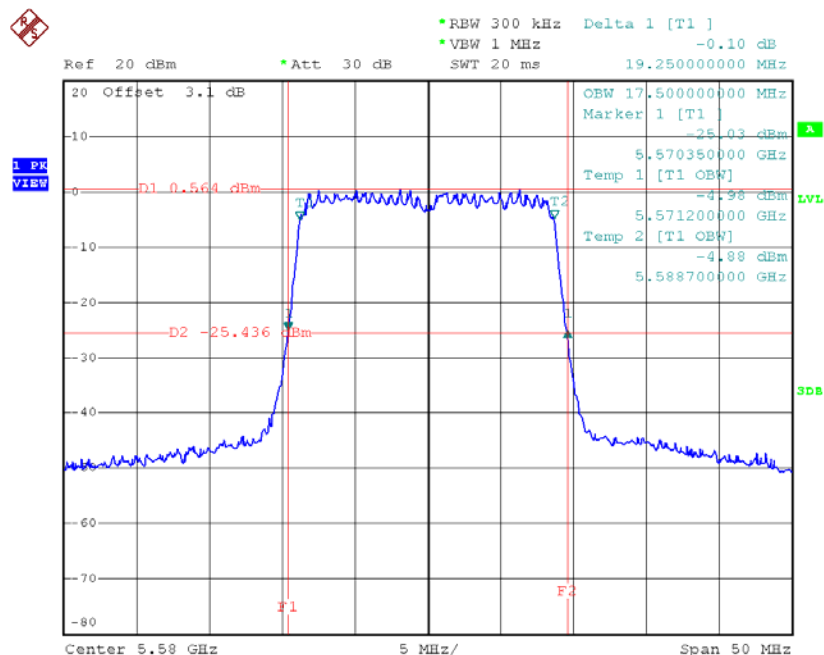

Date: 23.MAR.2016 10:24:00

TX CH140

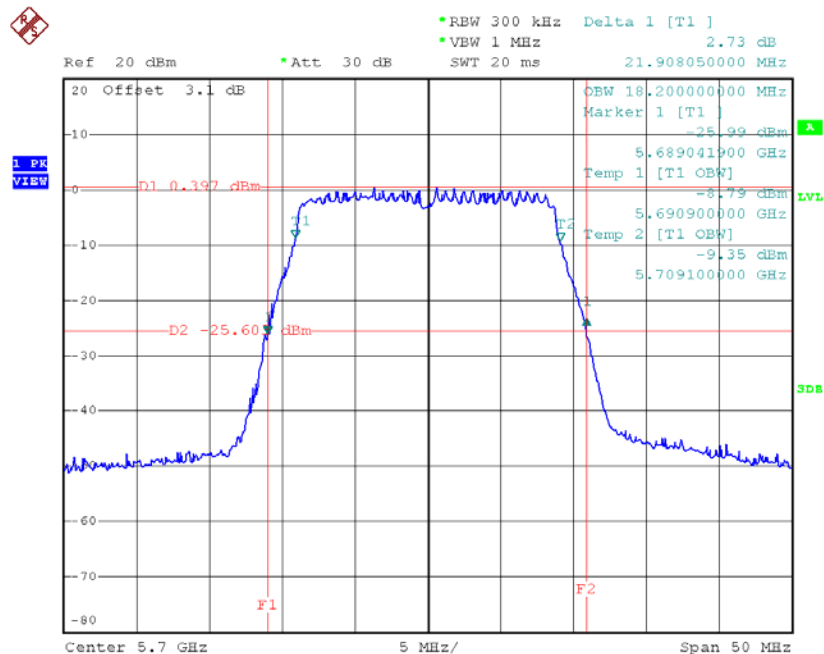


Date: 23.MAR.2016 10:25:50

Test Mode: UNII-2C/TX AC(VHT40) Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.80	36.40
CH110	5550	39.70	36.40
CH134	5670	40.00	36.40

TX CH102

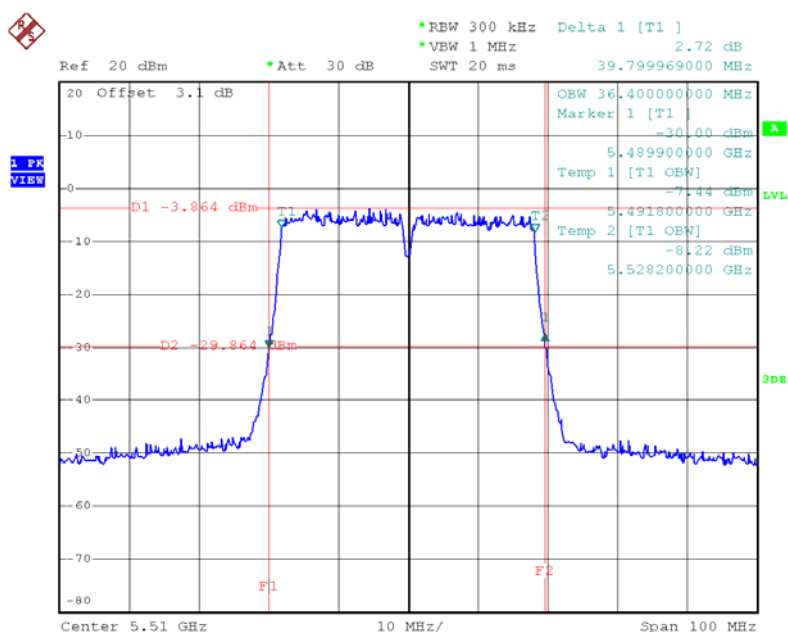


Date: 23.MAR.2016 10:48:35

TX CH110

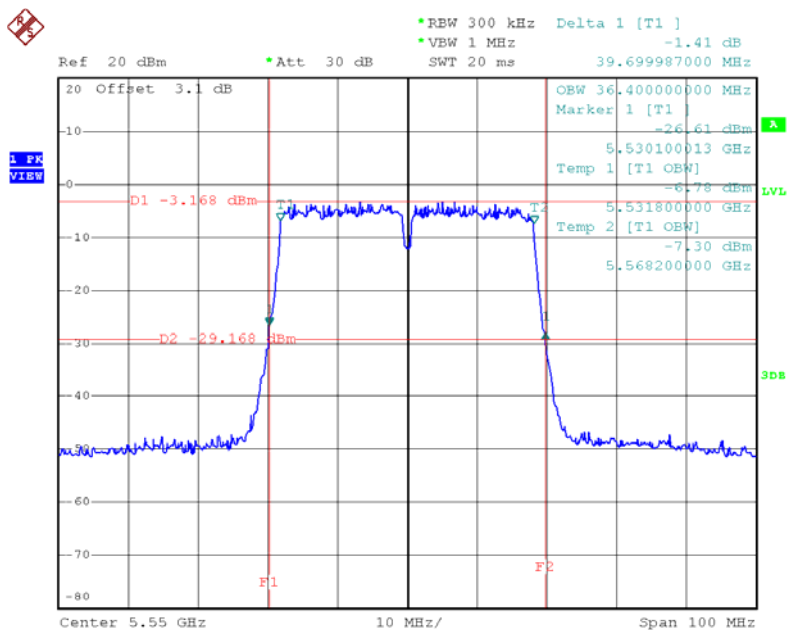

Date: 23.MAR.2016 10:50:30

TX CH134

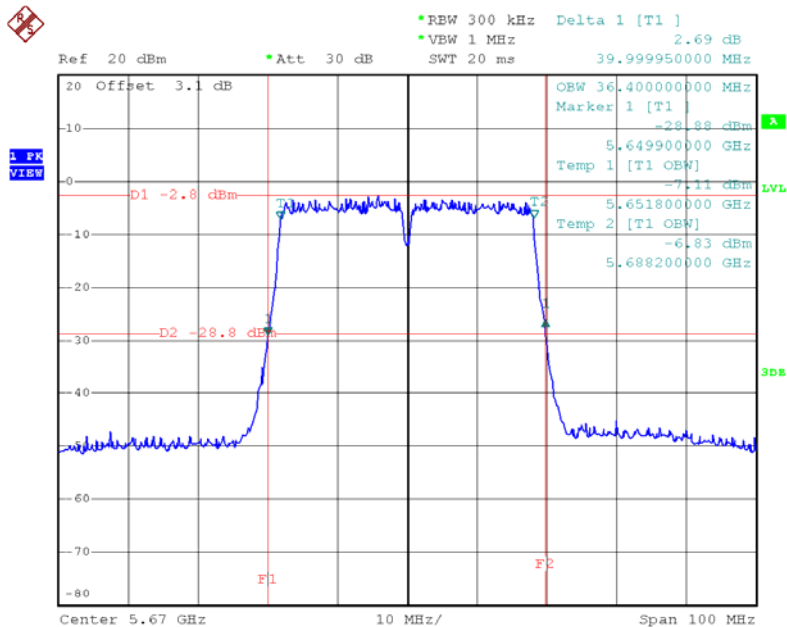


Date: 23.MAR.2016 10:51:33

Test Mode: UNII-2C/TX AC(VHT80) Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	81.40	76.00
CH122	5610	80.60	76.00

TX CH106

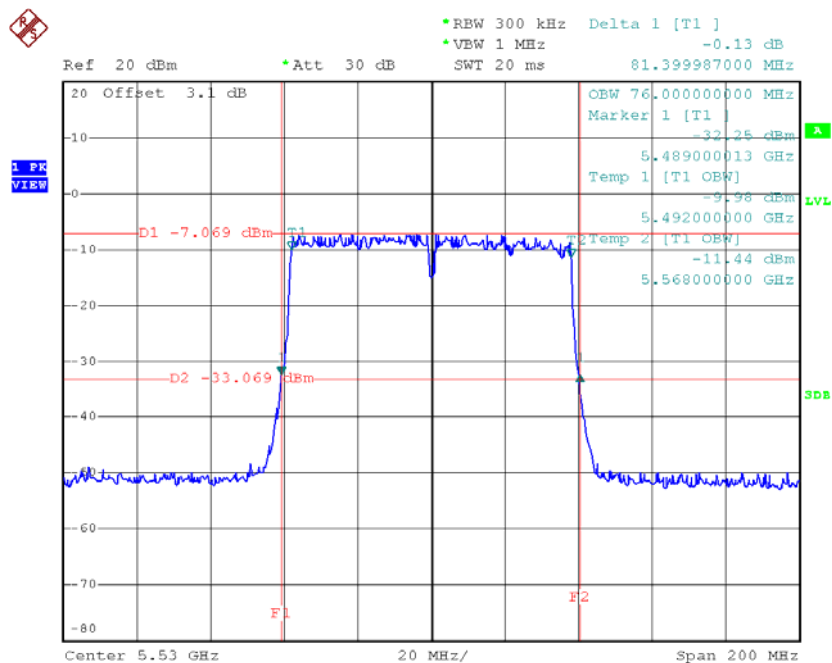

Date: 23.MAR.2016 10:56:53

TX CH122

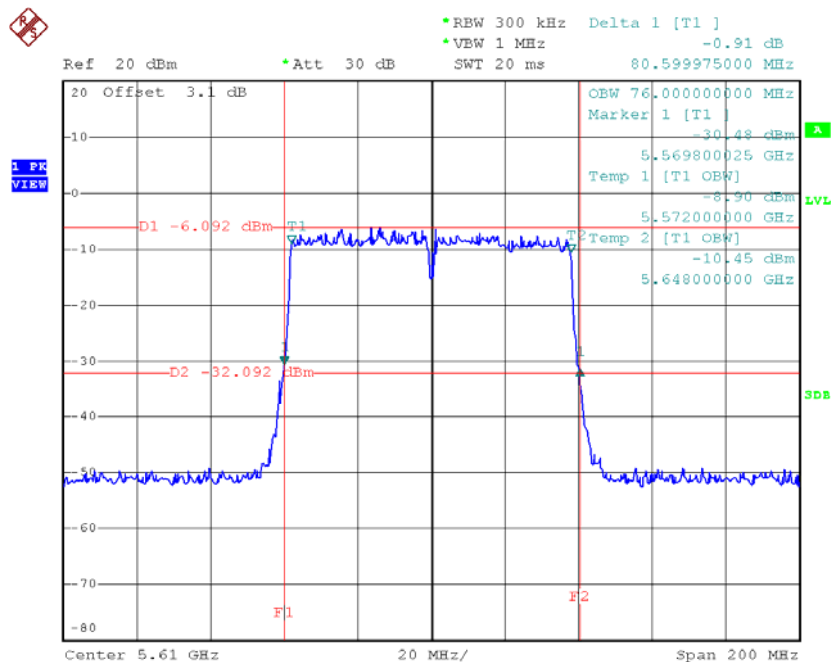


Date: 23.MAR.2016 11:00:06

Test Mode: UNII-3/ TX AC(VHT20) Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.15	17.40	>=500
CH157	5785	17.65	17.80	>=500
CH165	5825	17.65	17.80	>=500

TX CH 149

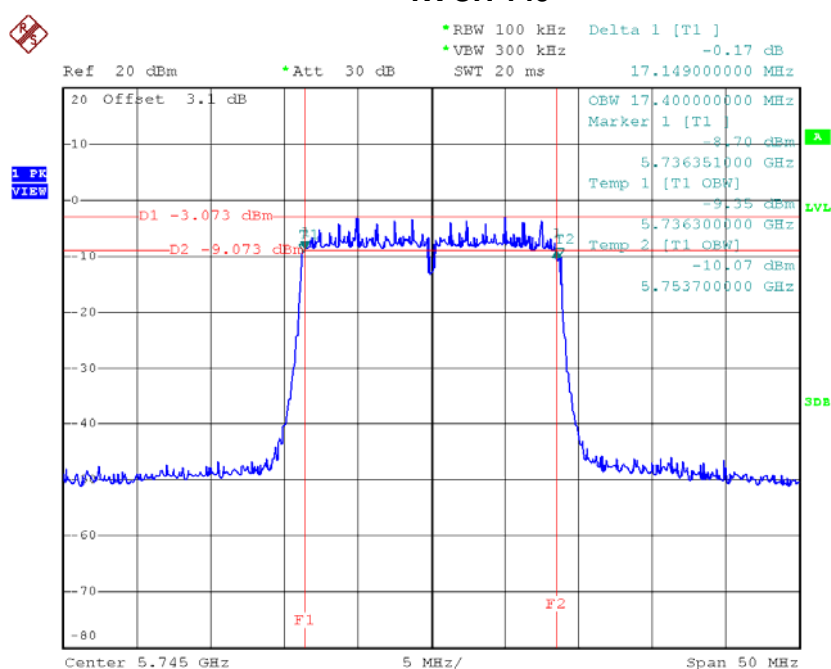


Date: 23.MAR.2016 10:27:08

TX CH 157

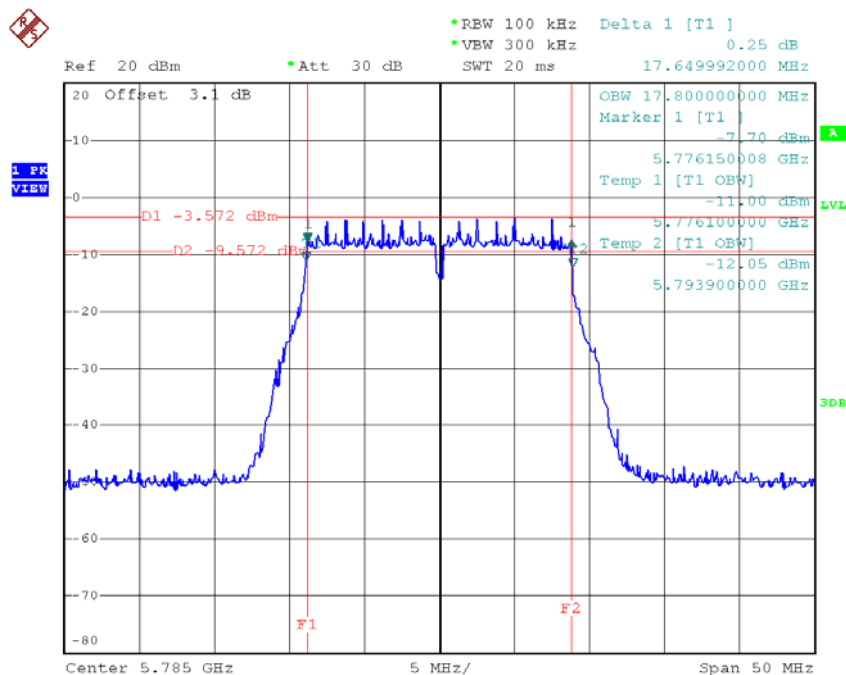

Date: 23.MAR.2016 10:28:19

TX CH 165

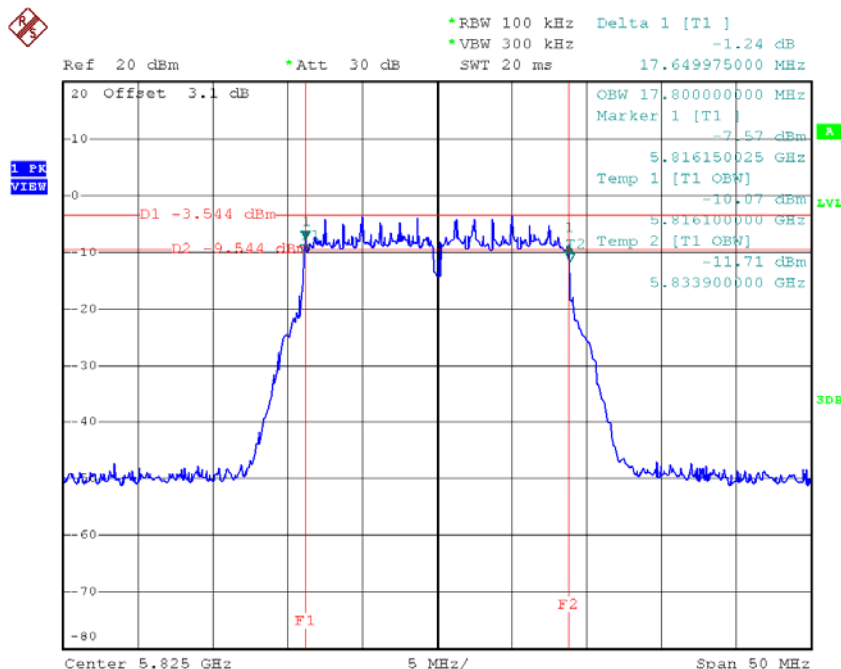


Date: 23.MAR.2016 10:29:18

Test Mode: UNII-3/ TX AC(VHT40) Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

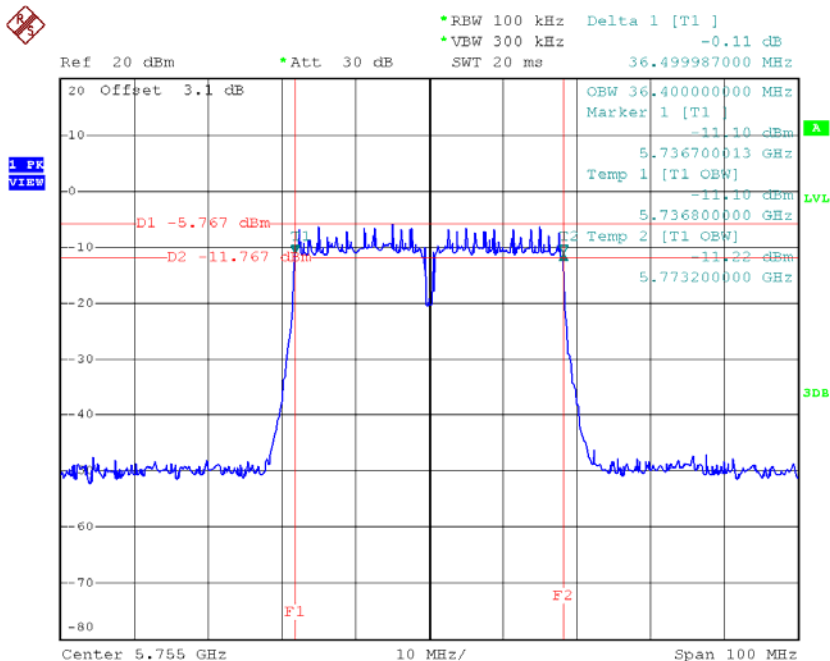

Date: 23.MAR.2016 10:52:47

TX CH 159

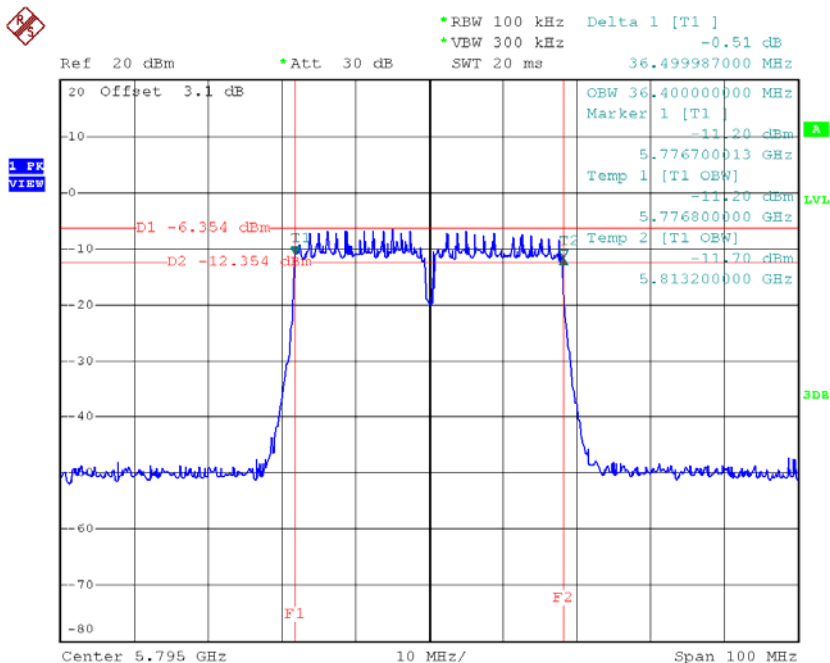


Date: 23.MAR.2016 10:53:57

Test Mode: UNII-3/ TX AC(VHT80) Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.60	76.00	>=500

TX CH 155

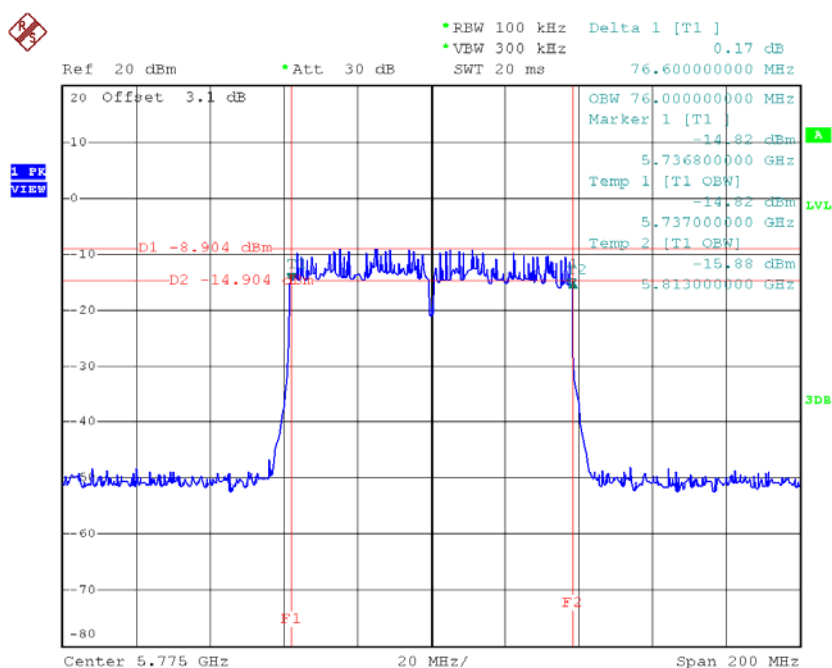

Date: 23.MAR.2016 11:01:33

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.63	0.26	11.89	30.00	1.00
CH40	5200	11.76	0.26	12.02	30.00	1.00
CH48	5240	11.68	0.26	11.94	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.08	0.48	6.56	30.00	1.00
CH40	5200	6.34	0.48	6.82	30.00	1.00
CH48	5240	6.84	0.48	7.32	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.01	0.48	10.49	30.00	1.00
CH40	5200	9.85	0.48	10.33	30.00	1.00
CH48	5240	9.81	0.48	10.29	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.97	30.00	1.00
CH40	5200	11.93	30.00	1.00
CH48	5240	12.07	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	4.88	1.11	5.99	30.00	1.00
CH46	5230	5.61	1.11	6.72	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.57	1.11	10.68	30.00	1.00
CH46	5230	9.32	1.11	10.43	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.95	30.00	1.00
CH46	5230	11.97	30.00	1.00

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.64	0.26	11.90	24.00	0.25
CH60	5300	11.73	0.26	11.99	24.00	0.25
CH64	5320	11.62	0.26	11.88	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.51	0.48	8.99	24.00	0.25
CH60	5300	8.53	0.48	9.01	24.00	0.25
CH64	5320	9.37	0.48	9.85	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.24	0.48	8.72	24.00	0.25
CH60	5300	7.63	0.48	8.11	24.00	0.25
CH64	5320	8.03	0.48	8.51	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.87	24.00	0.25
CH60	5300	11.60	24.00	0.25
CH64	5320	12.25	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.09	1.11	9.20	24.00	0.25
CH62	5310	8.21	1.11	9.32	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	7.44	1.11	8.55	24.00	0.25
CH62	5310	7.31	1.11	8.42	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.89	24.00	0.25
CH62	5310	11.90	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.72	0.26	9.98	24.00	0.25
CH116	5580	9.71	0.26	9.97	24.00	0.25
CH140	5700	9.67	0.26	9.93	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.74	0.48	7.22	24.00	0.25
CH116	5580	6.89	0.48	7.37	24.00	0.25
CH140	5700	6.61	0.48	7.09	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.17	0.48	6.65	24.00	0.25
CH116	5580	6.21	0.48	6.69	24.00	0.25
CH140	5700	6.37	0.48	6.85	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.96	24.00	0.25
CH116	5580	10.06	24.00	0.25
CH140	5700	9.99	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	5.76	1.11	6.87	24.00	0.25
CH110	5550	5.82	1.11	6.93	24.00	0.25
CH134	5670	5.78	1.11	6.89	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	5.78	1.11	6.89	24.00	0.25
CH110	5550	5.79	1.11	6.90	24.00	0.25
CH134	5670	5.83	1.11	6.94	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.89	24.00	0.25
CH110	5550	9.92	24.00	0.25
CH134	5670	9.92	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.66	0.26	9.92	30.00	1.00
CH157	5785	9.62	0.26	9.88	30.00	1.00
CH165	5825	9.73	0.26	9.99	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.41	0.48	6.89	30.00	1.00
CH157	5785	6.12	0.48	6.60	30.00	1.00
CH165	5825	6.61	0.48	7.09	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.36	0.48	6.84	30.00	1.00
CH157	5785	6.27	0.48	6.75	30.00	1.00
CH165	5825	6.32	0.48	6.80	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.88	30.00	1.00
CH157	5785	9.69	30.00	1.00
CH165	5825	9.96	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	5.63	1.11	6.74	30.00	1.00
CH159	5795	5.71	1.11	6.82	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	5.77	1.11	6.88	30.00	1.00
CH159	5795	5.82	1.11	6.93	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.82	30.00	1.00
CH159	5795	9.88	30.00	1.00

Test Mode: UNII-1/TX AC(VHT20) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.88	0.20	6.08	30.00	1.00
CH40	5200	6.27	0.20	6.47	30.00	1.00
CH48	5240	6.79	0.20	6.99	30.00	1.00

Test Mode: UNII-1/TX AC(VHT20) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.08	0.20	10.28	30.00	1.00
CH40	5200	9.85	0.20	10.05	30.00	1.00
CH48	5240	9.81	0.20	10.01	30.00	1.00

Test Mode: UNII-1/TX AC(VHT20) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.68	30.00	1.00
CH40	5200	11.63	30.00	1.00
CH48	5240	11.76	30.00	1.00

Test Mode: UNII-1/TX AC(VHT40) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	4.97	0.64	5.61	30.00	1.00
CH46	5230	5.57	0.64	6.21	30.00	1.00

Test Mode: UNII-1/TX AC(VHT40) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.62	0.64	10.26	30.00	1.00
CH46	5230	9.35	0.64	9.99	30.00	1.00

Test Mode: UNII-1/TX AC(VHT40) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.54	30.00	1.00
CH46	5230	11.51	30.00	1.00

Test Mode: UNII-1/TX AC(VHT80) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	5.61	1.09	6.70	30.00	1.00

Test Mode: UNII-1/TX AC(VHT80) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.35	1.09	10.44	30.00	1.00

Test Mode: UNII-1/TX AC(VHT80) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	11.97	30.00	1.00

Test Mode: UNII-2A/TX AC(VHT20) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.54	0.20	8.74	24.00	0.25
CH60	5300	8.53	0.20	8.73	24.00	0.25
CH64	5320	9.37	0.20	9.57	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT20) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.25	0.20	8.45	24.00	0.25
CH60	5300	7.63	0.20	7.83	24.00	0.25
CH64	5320	8.03	0.20	8.23	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT20) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.60	24.00	0.25
CH60	5300	11.31	24.00	0.25
CH64	5320	11.96	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT40) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.14	0.64	8.78	24.00	0.25
CH62	5310	8.19	0.64	8.83	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT40) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	7.53	0.64	8.17	24.00	0.25
CH62	5310	7.25	0.64	7.89	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT40) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.50	24.00	0.25
CH62	5310	11.40	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT80) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	7.85	1.09	8.94	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT80) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	7.33	1.09	8.42	24.00	0.25

Test Mode: UNII-2A/TX AC(VHT80) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	11.70	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT20) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.74	0.20	6.94	24.00	0.25
CH116	5580	6.87	0.20	7.07	24.00	0.25
CH140	5700	6.61	0.20	6.81	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT20) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.17	0.20	6.37	24.00	0.25
CH116	5580	6.18	0.20	6.38	24.00	0.25
CH140	5700	6.37	0.20	6.57	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT20) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.67	24.00	0.25
CH116	5580	9.74	24.00	0.25
CH140	5700	9.70	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT40) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	5.88	0.64	6.52	24.00	0.25
CH110	5550	5.72	0.64	6.36	24.00	0.25
CH134	5670	5.82	0.64	6.46	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT40) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	5.82	0.64	6.46	24.00	0.25
CH110	5550	5.69	0.64	6.33	24.00	0.25
CH134	5670	5.89	0.64	6.53	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT40) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.50	24.00	0.25
CH110	5550	9.36	24.00	0.25
CH134	5670	9.51	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT80) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	5.77	1.09	6.86	24.00	0.25
CH122	5610	5.58	1.09	6.67	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT80) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	5.89	1.09	6.98	24.00	0.25
CH122	5610	5.71	1.09	6.80	24.00	0.25

Test Mode: UNII-2C/TX AC(VHT80) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.93	24.00	0.25
CH122	5610	9.75	24.00	0.25

Test Mode: UNII-3/TX AC(VHT20) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.41	0.20	6.61	30.00	1.00
CH157	5785	6.12	0.20	6.32	30.00	1.00
CH165	5825	6.61	0.20	6.81	30.00	1.00

Test Mode: UNII-3/TX AC(VHT20) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.32	0.20	6.52	30.00	1.00
CH157	5785	6.22	0.20	6.42	30.00	1.00
CH165	5825	6.31	0.20	6.51	30.00	1.00

Test Mode: UNII-3/TX AC(VHT20) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.57	30.00	1.00
CH157	5785	9.38	30.00	1.00
CH165	5825	9.67	30.00	1.00

Test Mode: UNII-3/TX AC(VHT40) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	5.67	0.64	6.31	30.00	1.00
CH159	5795	5.79	0.64	6.43	30.00	1.00

Test Mode: UNII-3/TX AC(VHT40) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	5.73	0.64	6.37	30.00	1.00
CH159	5795	5.84	0.64	6.48	30.00	1.00

Test Mode: UNII-3/TX AC(VHT40) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.35	30.00	1.00
CH159	5795	9.47	30.00	1.00

Test Mode: UNII-3/TX AC(VHT80) Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	5.73	1.09	6.82	30.00	1.00

Test Mode: UNII-3/TX AC(VHT80) Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	5.82	1.09	6.91	30.00	1.00


Test Mode: UNII-3/TX AC(VHT80) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	9.88	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-1/TX A Mode

TX mode CH36

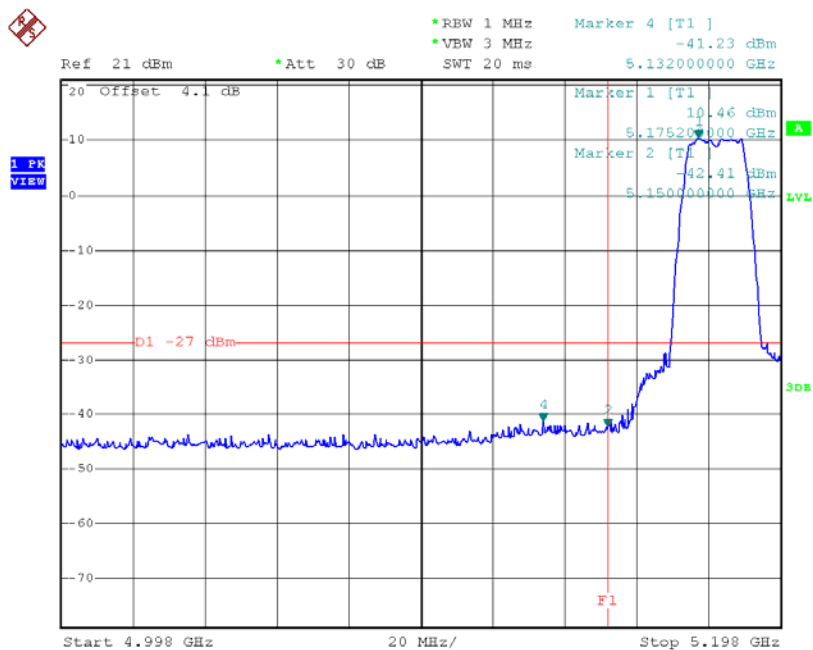

Date: 23.MAR.2016 09:05:46


TX mode CH48

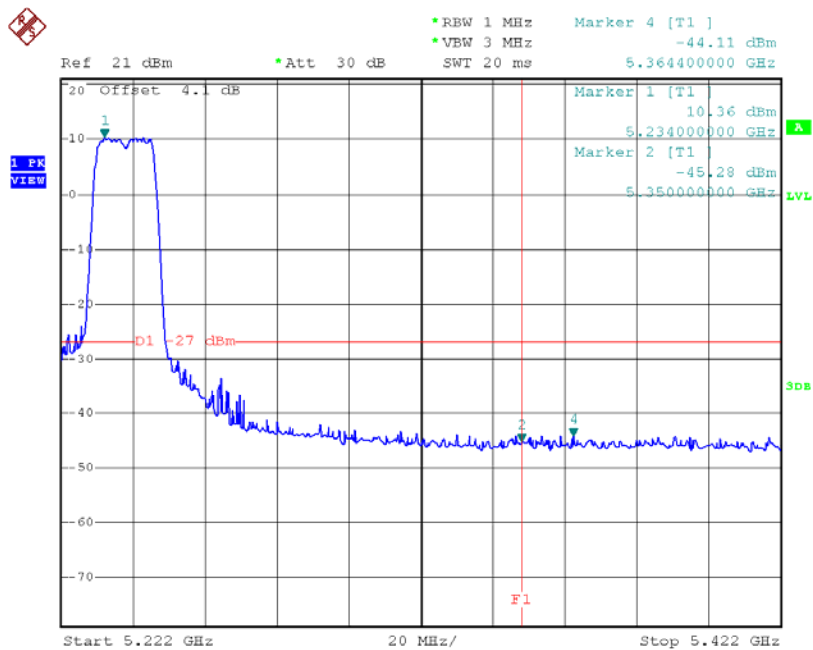

Date: 23.MAR.2016 09:12:15


Test Mode: UNII-1/TX N20 Mode_ANT 1

TX mode CH36

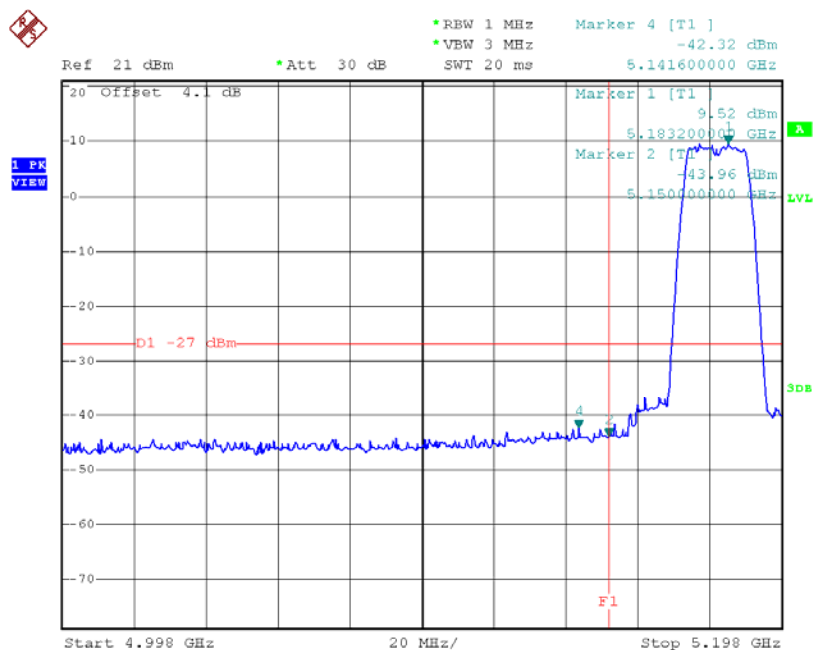

Date: 23.MAR.2016 11:07:11


TX mode CH48

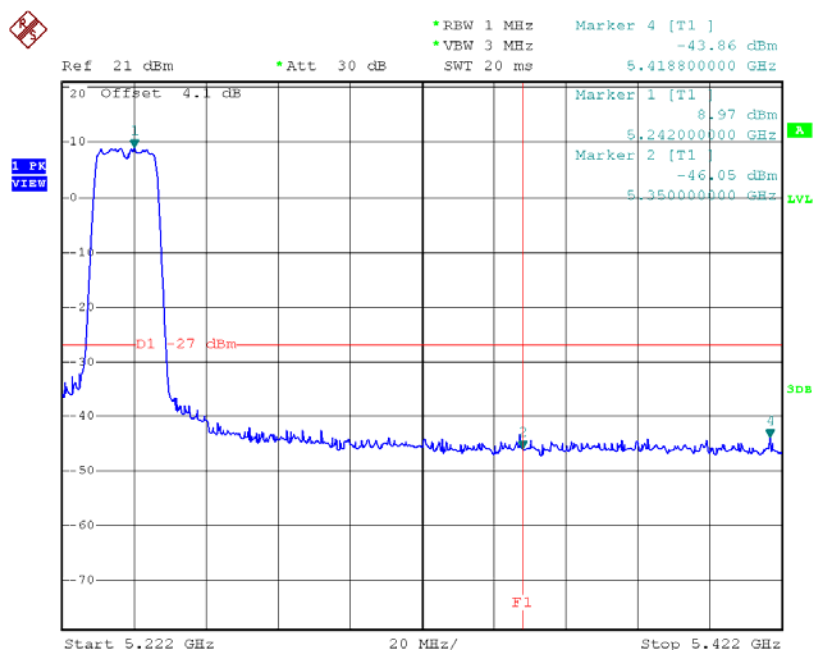

Date: 23.MAR.2016 11:10:54


Test Mode: UNII-1/TX N20 Mode_ANT 2

TX mode CH36

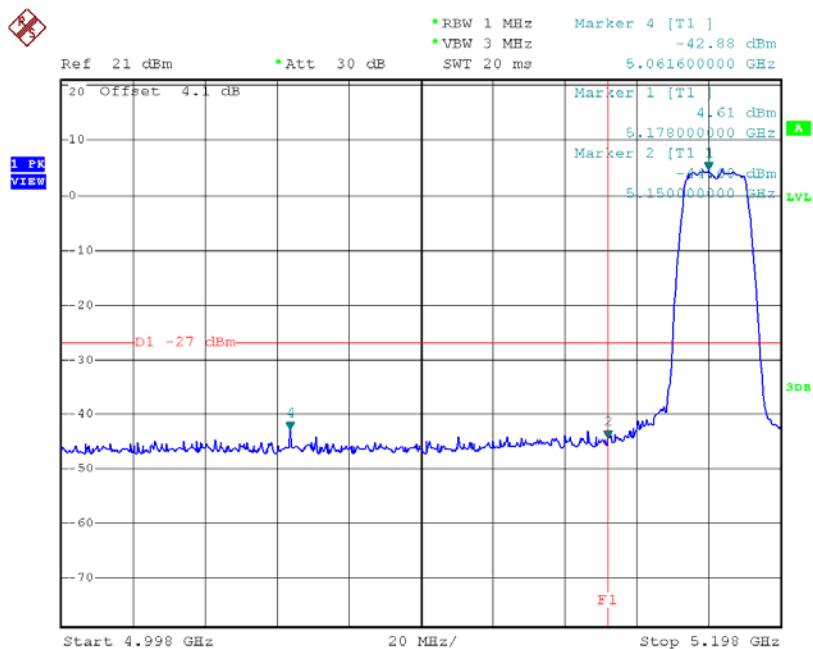

Date: 23.MAR.2016 13:19:19


TX mode CH48

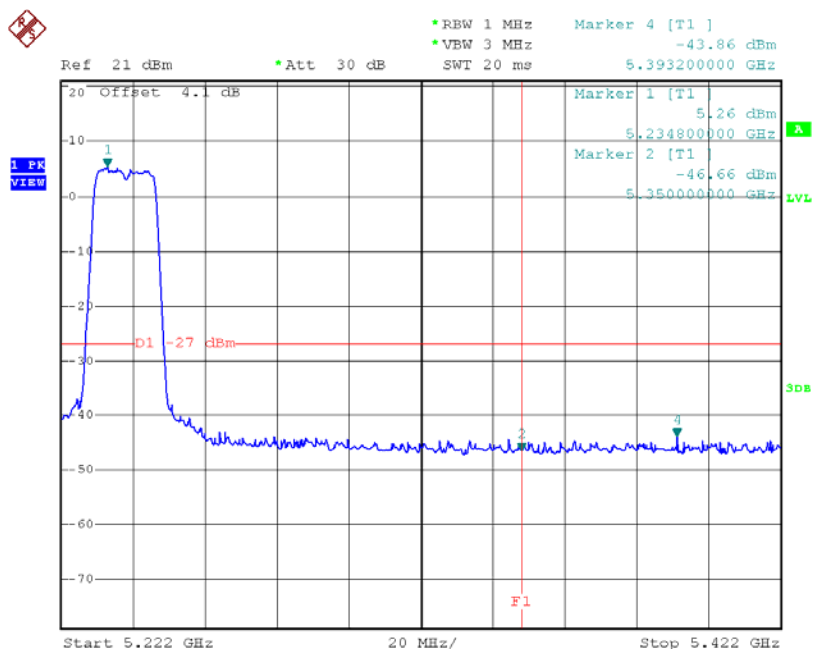

Date: 23.MAR.2016 13:21:28


Test Mode: UNII-1/TX N40 Mode_ANT 1

TX mode CH38

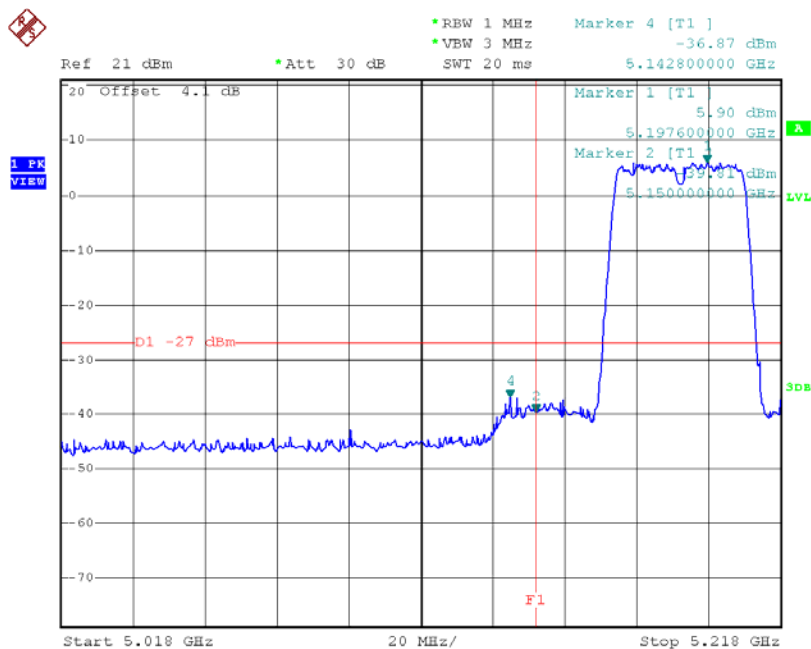

Date: 23.MAR.2016 11:16:09


TX mode CH46

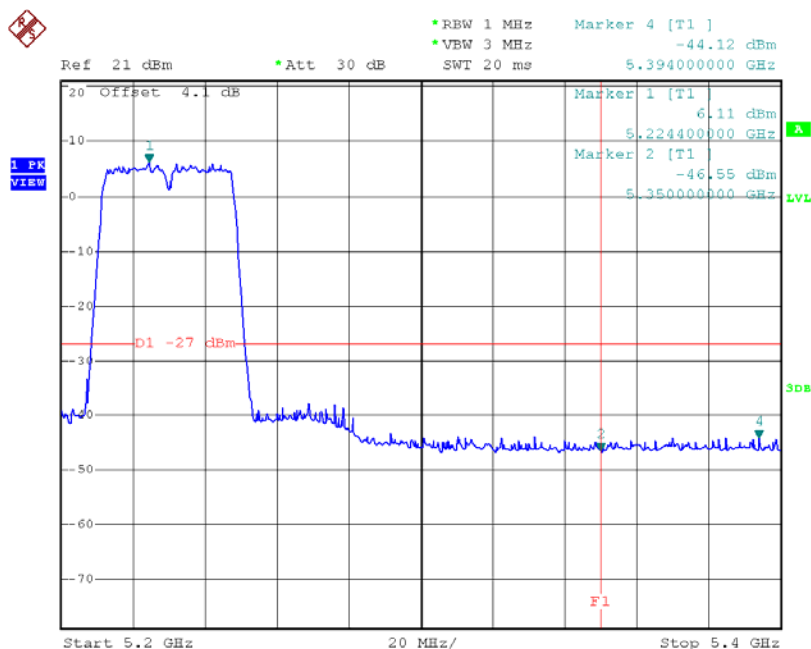

Date: 23.MAR.2016 11:17:43


Test Mode: UNII-1/TX N40 Mode_ANT 2

TX mode CH38

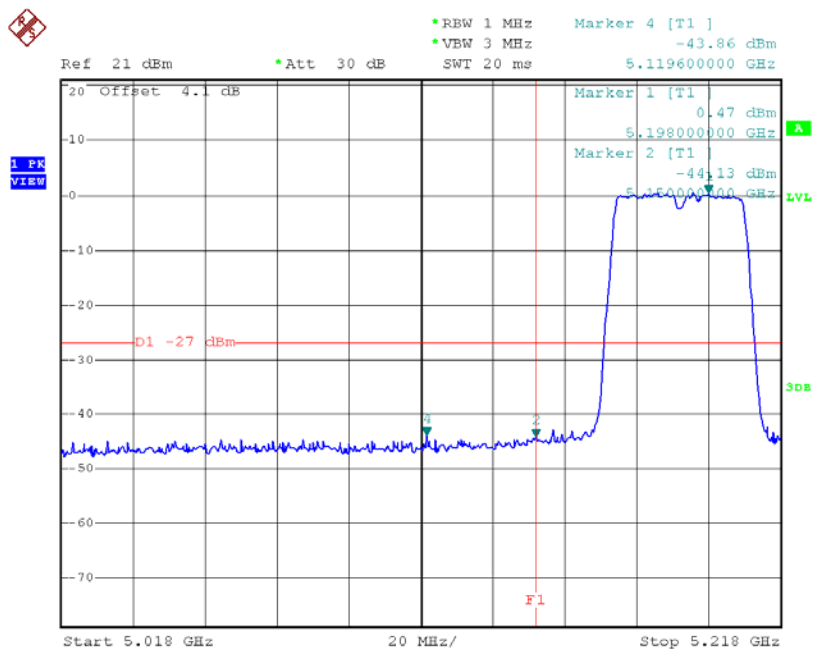

Date: 23.MAR.2016 13:26:30


TX mode CH46

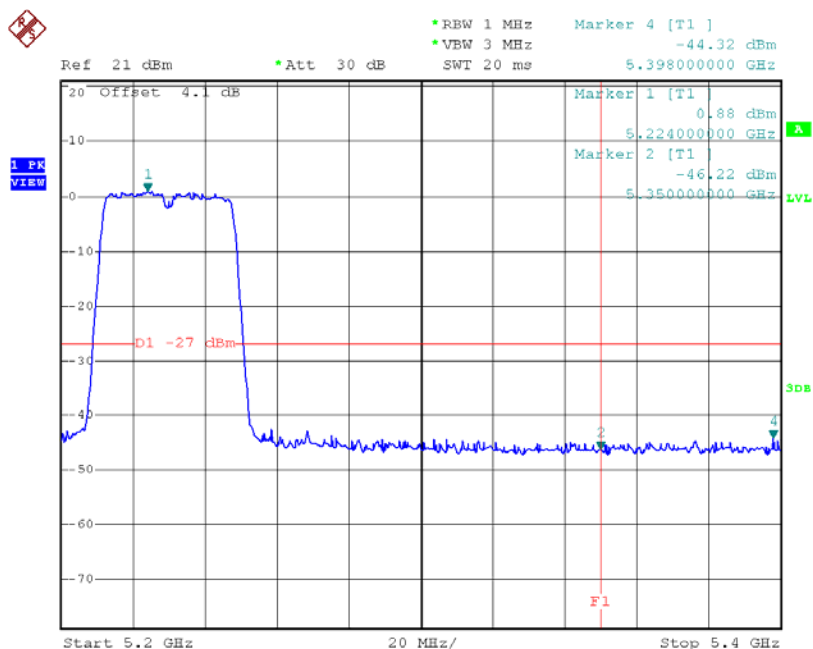

Date: 23.MAR.2016 13:28:07


Test Mode: UNII-2A/TX A Mode

TX mode CH52

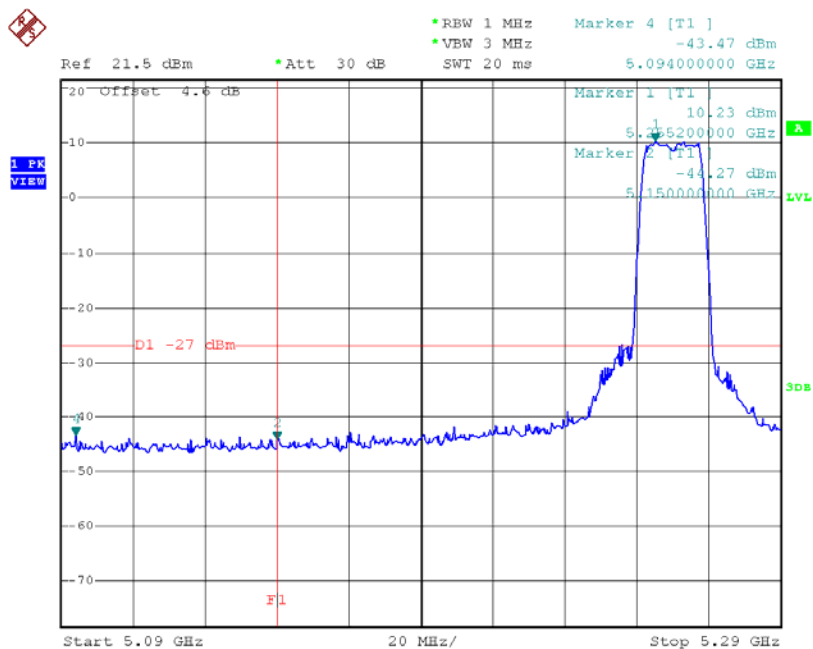

Date: 23.MAR.2016 09:16:01


TX mode CH64

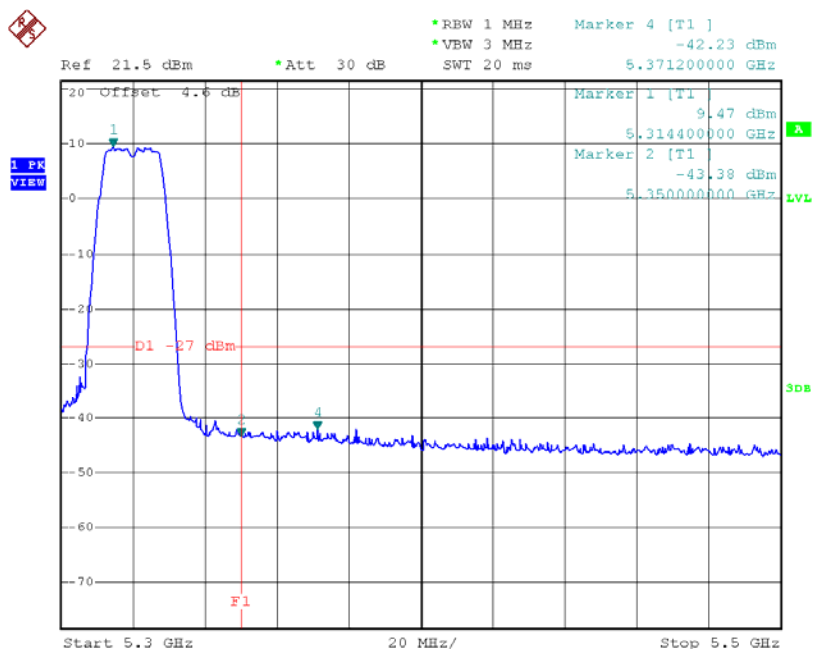

Date: 23.MAR.2016 09:22:05


Test Mode: UNII-2A/TX N20 Mode_ANT 1

TX mode CH52

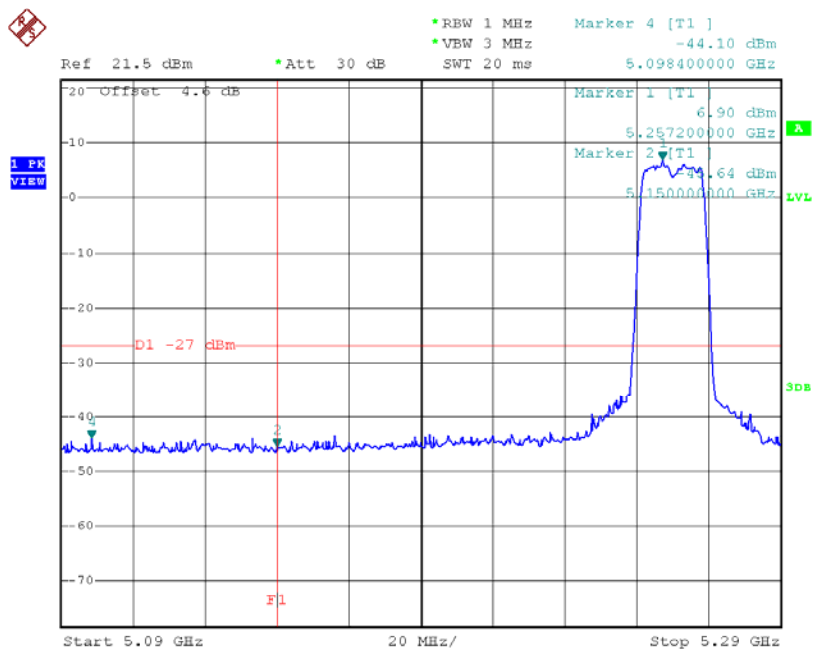

Date: 23.MAR.2016 09:48:57


TX mode CH64

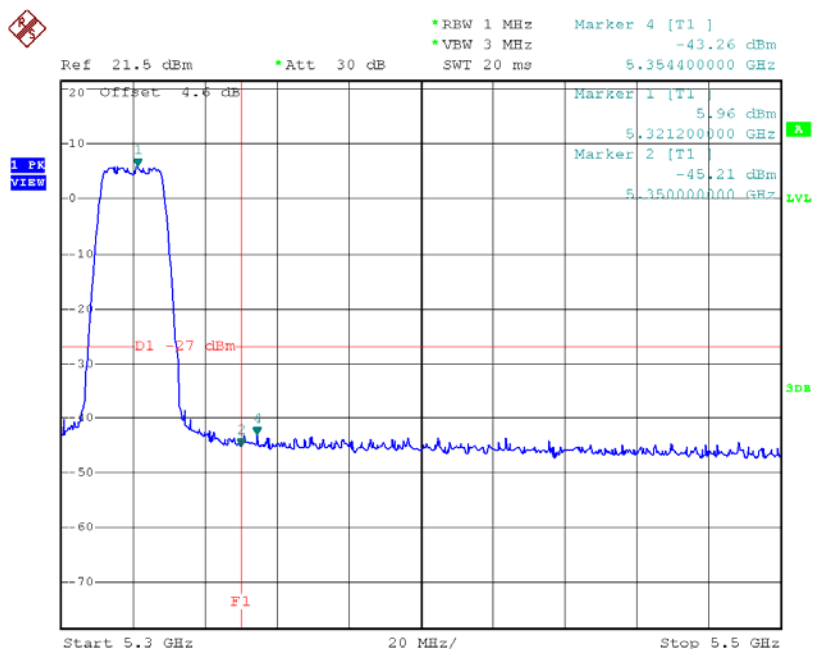

Date: 23.MAR.2016 09:51:44


Test Mode: UNII-2A/TX N20 Mode_ANT 2

TX mode CH52

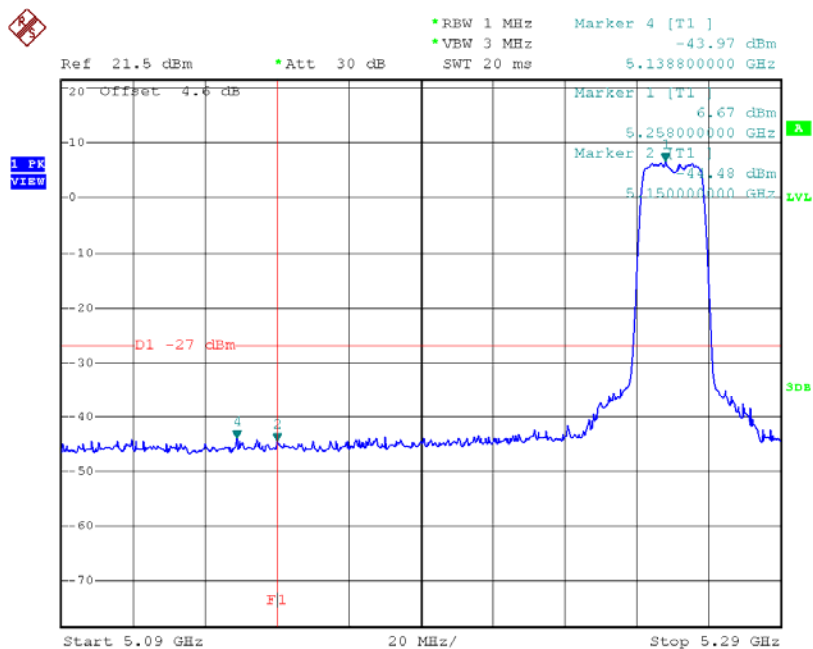

Date: 23.MAR.2016 13:36:19


TX mode CH64

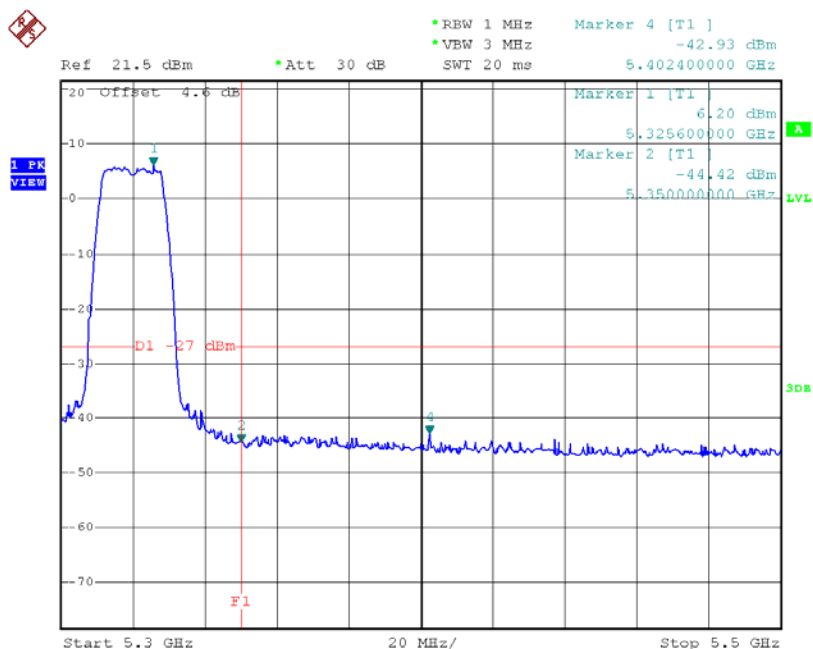

Date: 23.MAR.2016 13:40:13


Test Mode: UNII-2A/TX N40 Mode_ANT 1

TX mode CH54

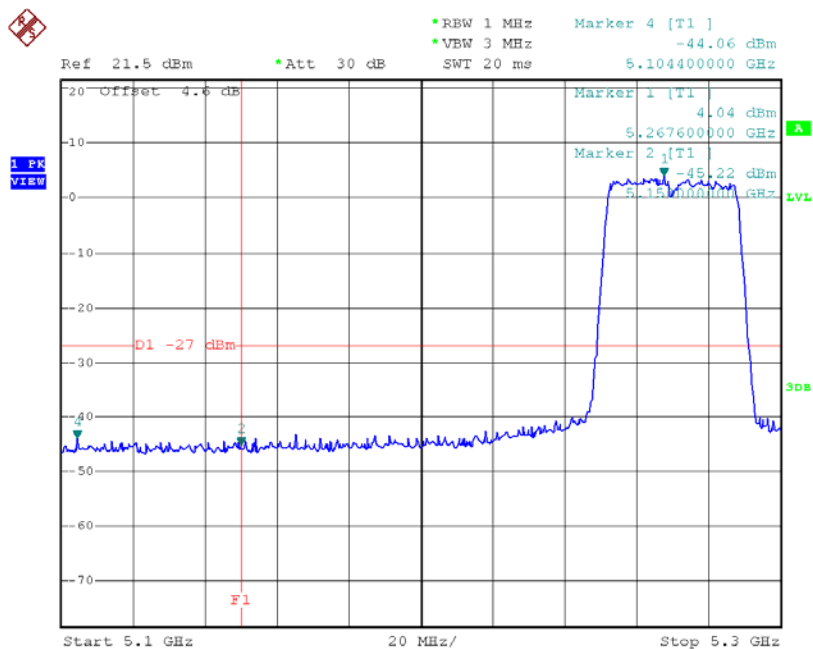

Date: 23.MAR.2016 10:31:06


TX mode CH62

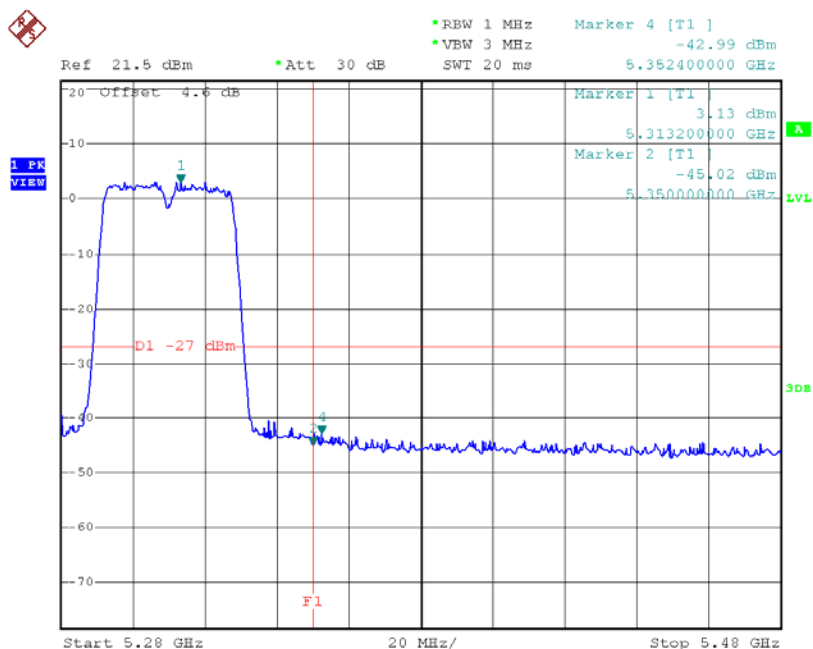

Date: 23.MAR.2016 10:32:56


Test Mode: UNII-2A/TX N40 Mode_ANT 2

TX mode CH54

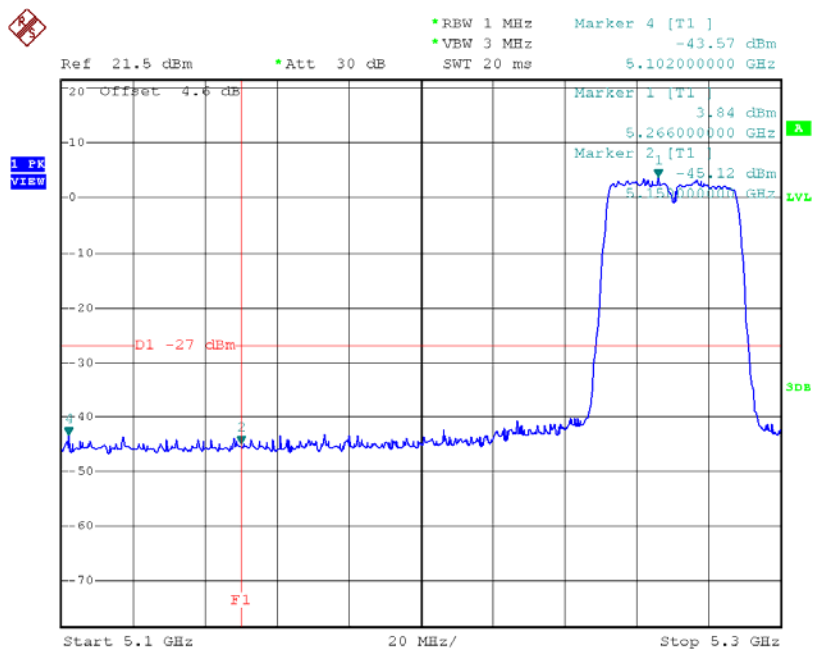

Date: 23.MAR.2016 14:07:32


TX mode CH62

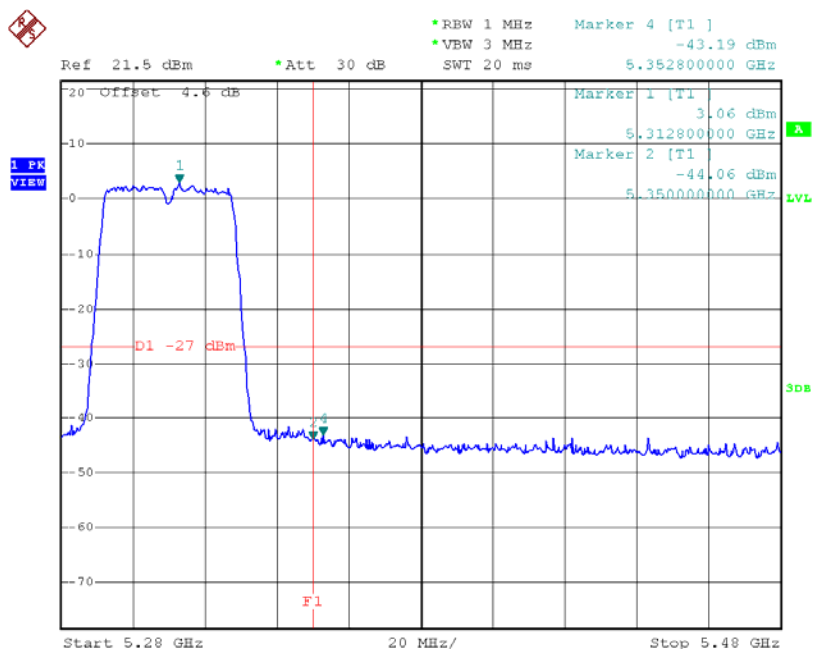

Date: 23.MAR.2016 14:08:39


Test Mode: UNII-2C/TX A Mode

TX mode CH100

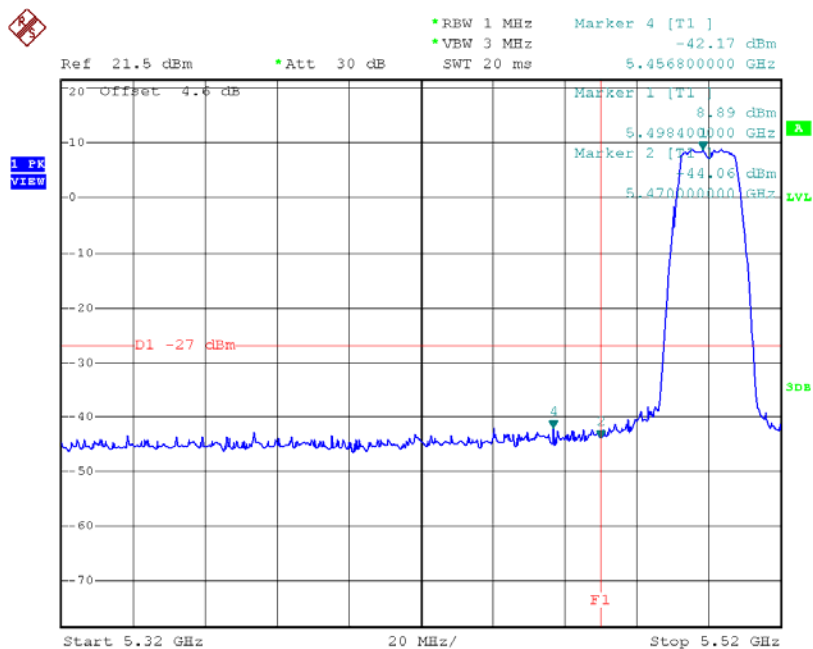

Date: 23.MAR.2016 09:23:36


TX mode CH140

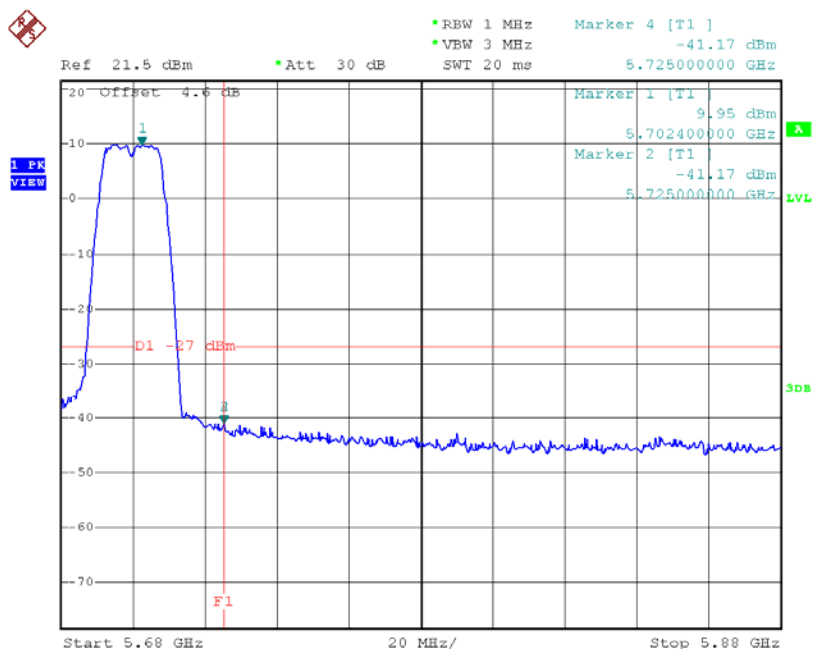

Date: 23.MAR.2016 09:31:38


Test Mode: UNII-2C/TX N20 Mode_ANT 1

TX mode CH100

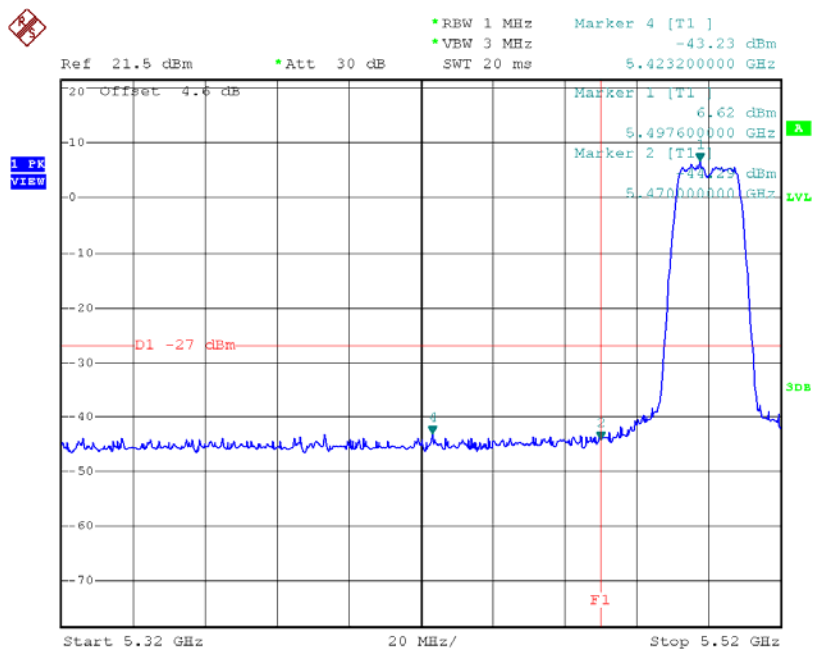

Date: 23.MAR.2016 09:53:10


TX mode CH140

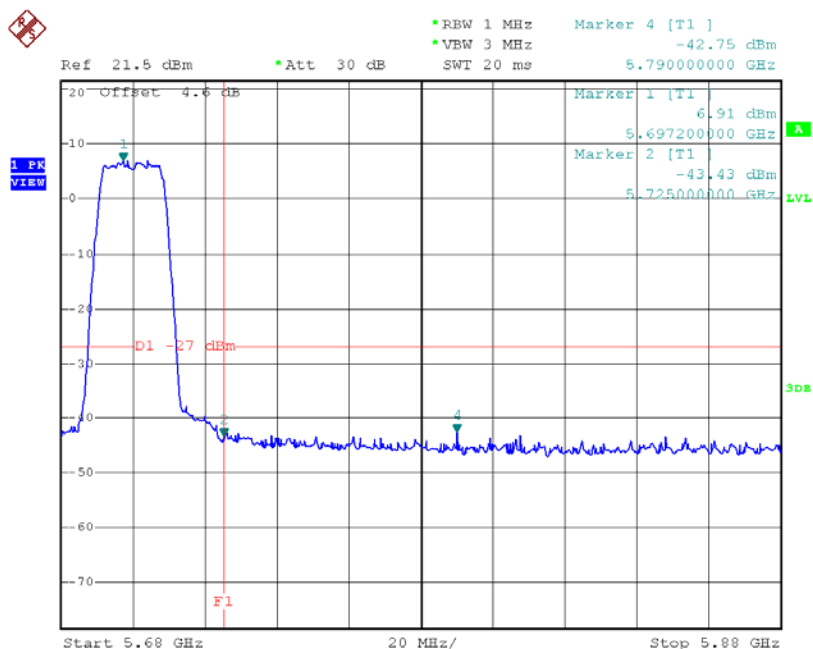

Date: 23.MAR.2016 09:55:37


Test Mode: UNII-2C/TX N20 Mode_ANT 2

TX mode CH100

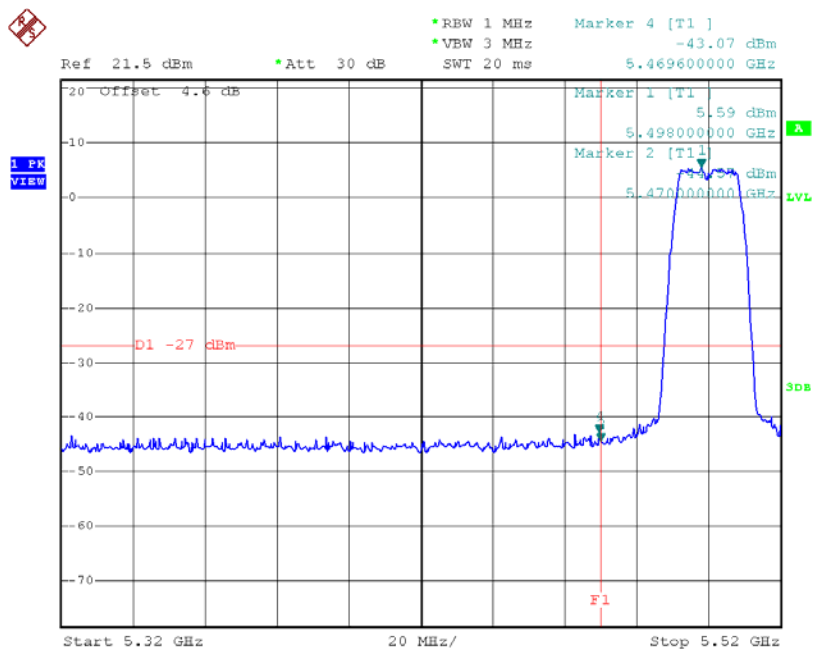

Date: 23.MAR.2016 13:42:47


TX mode CH140

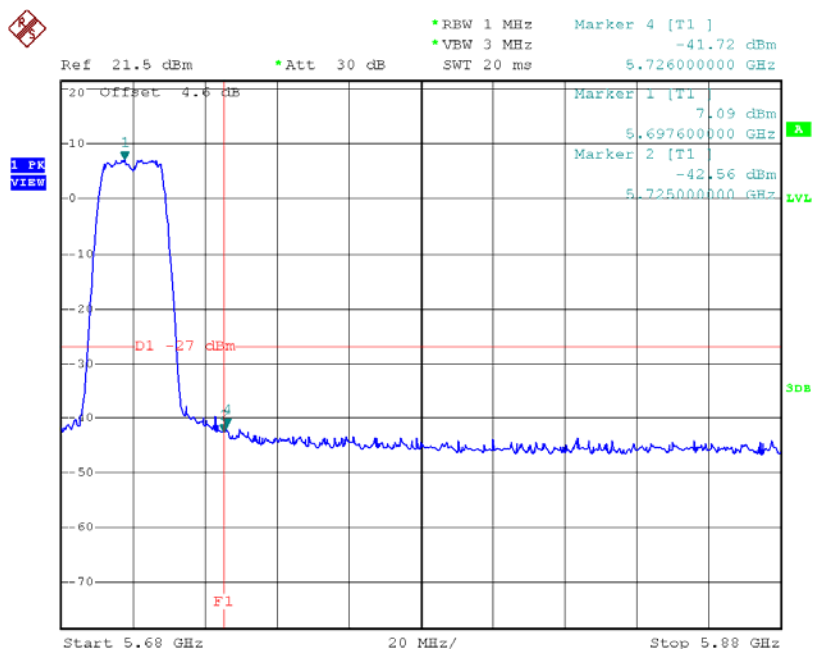

Date: 23.MAR.2016 13:45:45


Test Mode: UNII-2C/TX N40 Mode_ANT 1

TX mode CH102

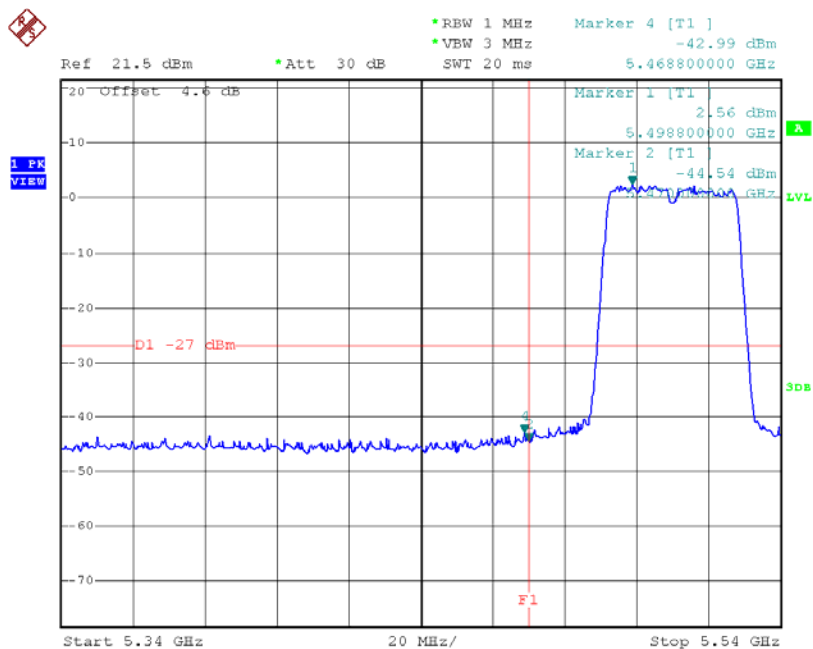

Date: 23.MAR.2016 10:34:28


TX mode CH134

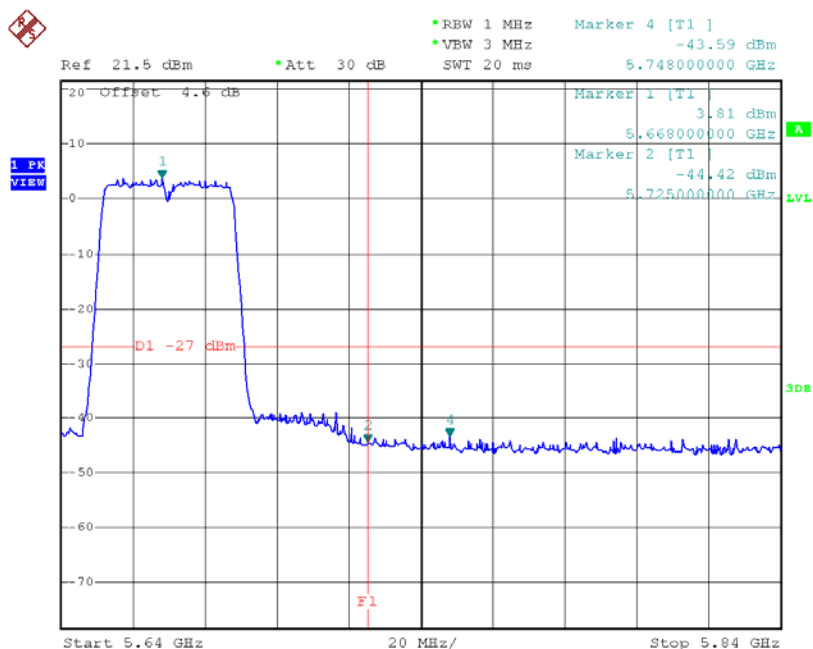

Date: 23.MAR.2016 10:37:59


Test Mode: UNII-2C/TX N40 Mode_ANT 2

TX mode CH102

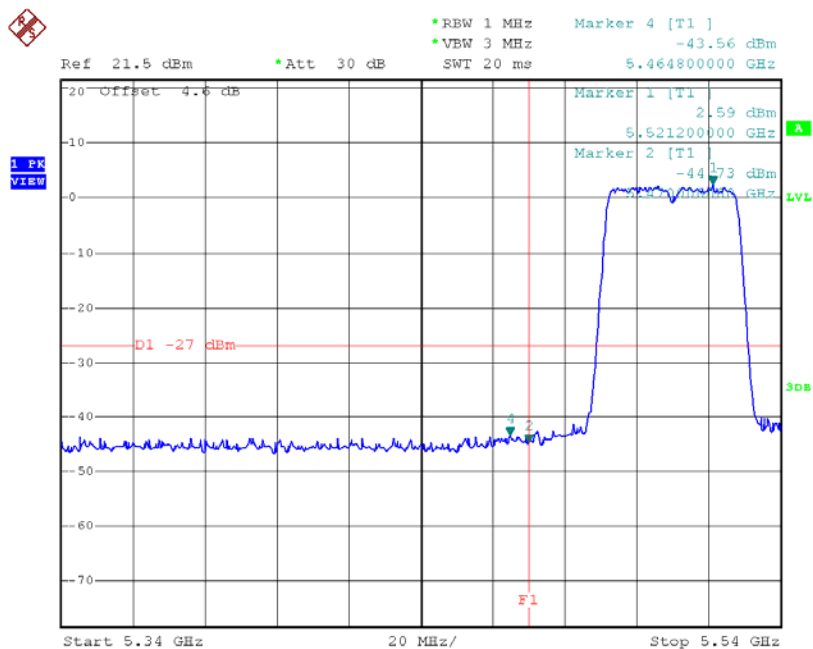

Date: 23.MAR.2016 14:12:11


TX mode CH134

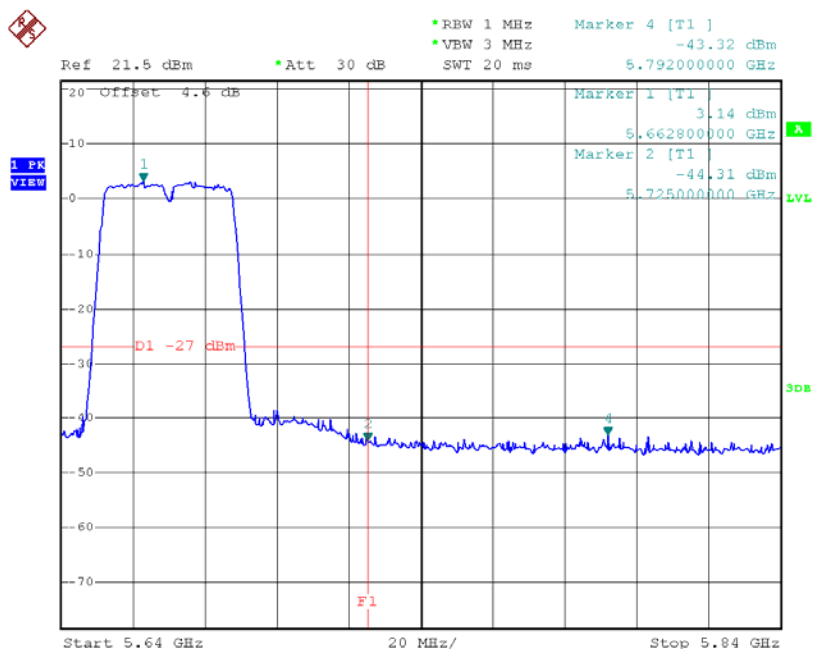

Date: 23.MAR.2016 14:16:45


Test Mode: UNII-3/TX A Mode

TX A Mode CH149

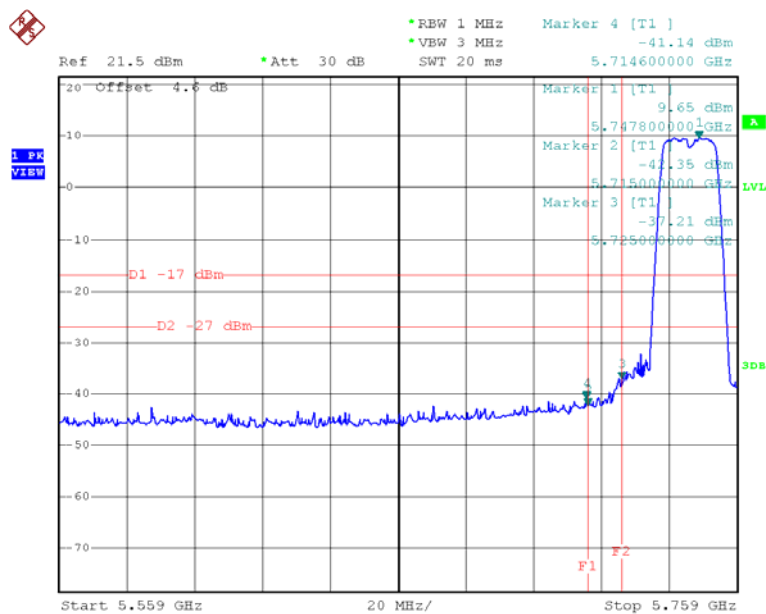

Date: 23.MAR.2016 09:33:07


TX A Mode CH165

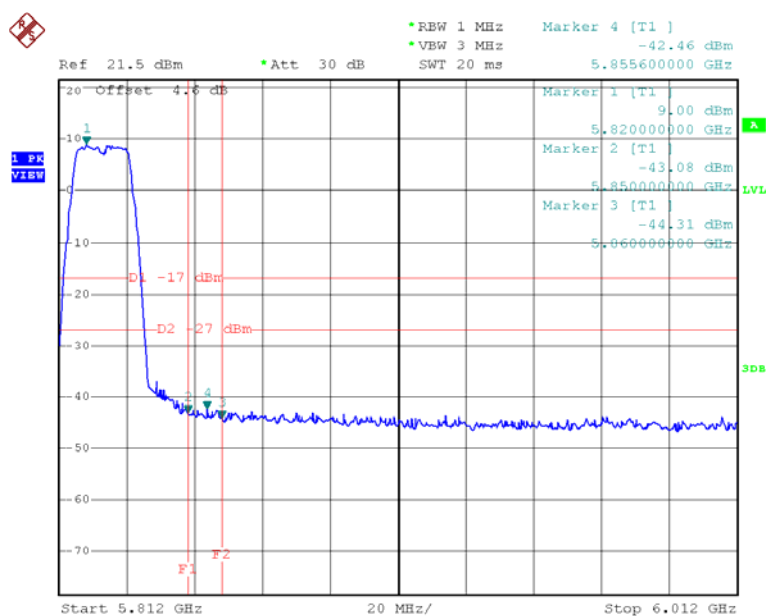

Date: 23.MAR.2016 09:40:45


Test Mode: UNII-3/TX N20 Mode_ANT 1

TX HT20 mode CH149

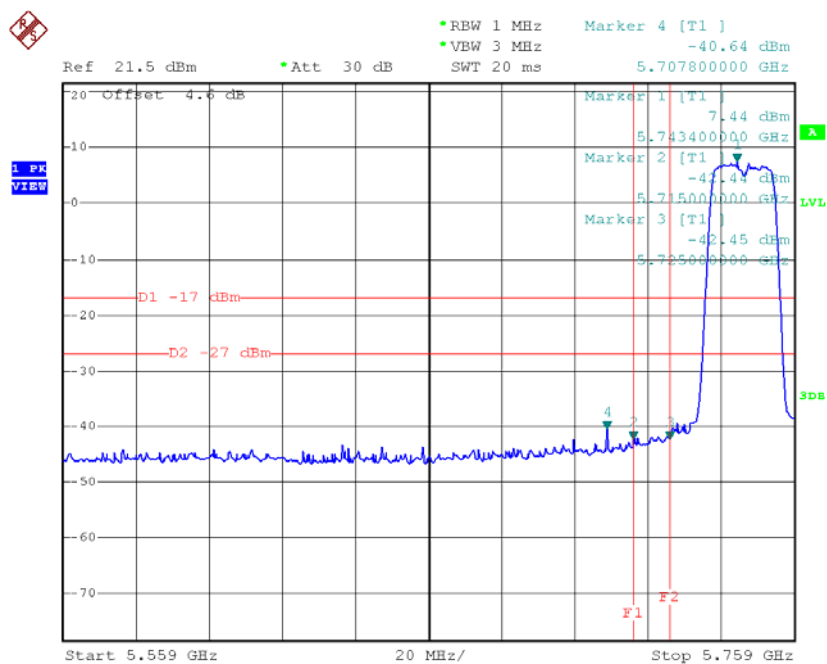

Date: 23.MAR.2016 09:56:54


TX HT20 mode CH165

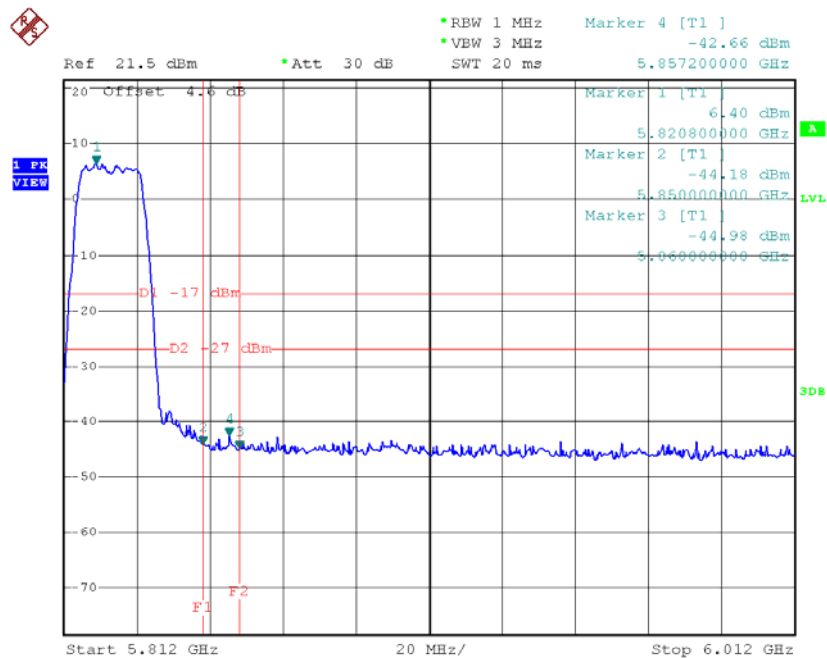

Date: 23.MAR.2016 09:59:15


Test Mode: UNII-3/TX N20 Mode_ANT 2

TX HT20 mode CH149

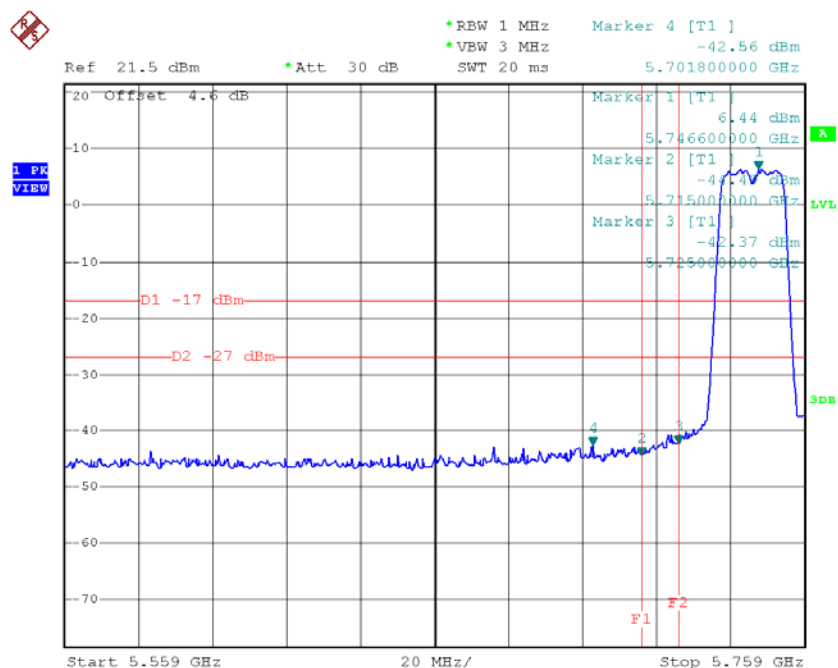

Date: 23.MAR.2016 13:47:06


TX HT20 mode CH165

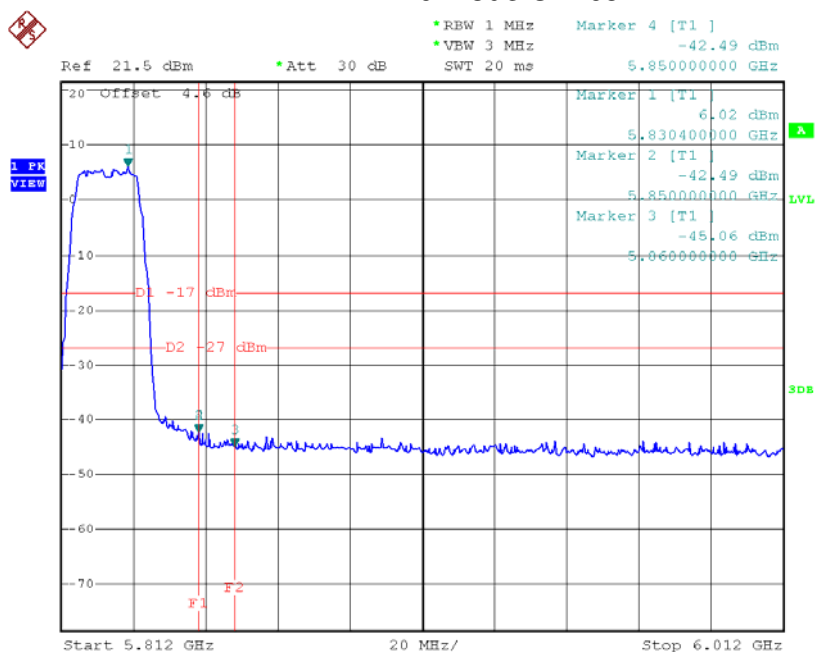

Date: 23.MAR.2016 13:49:24


Test Mode: UNII-3/TX N40 Mode_ANT 1

TX HT40 mode CH151

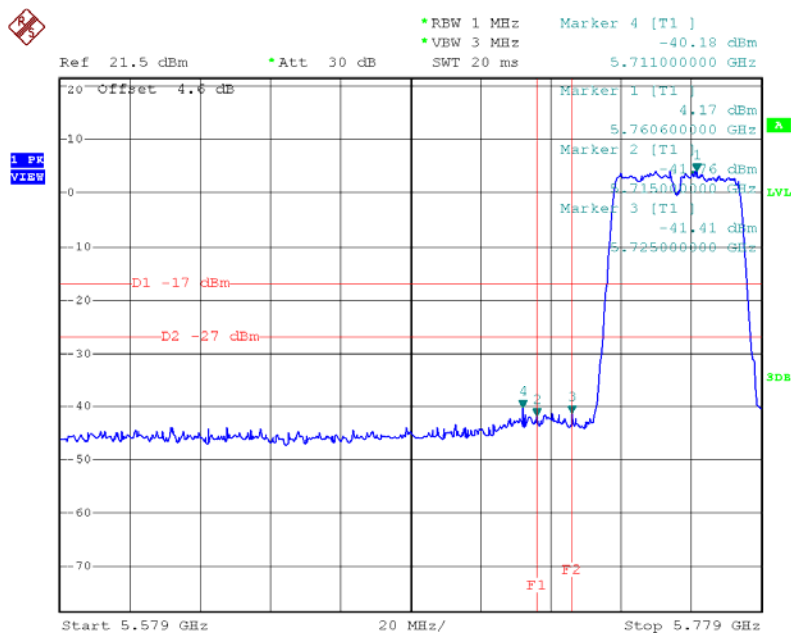

Date: 23.MAR.2016 10:43:01


HT40 mode CH159

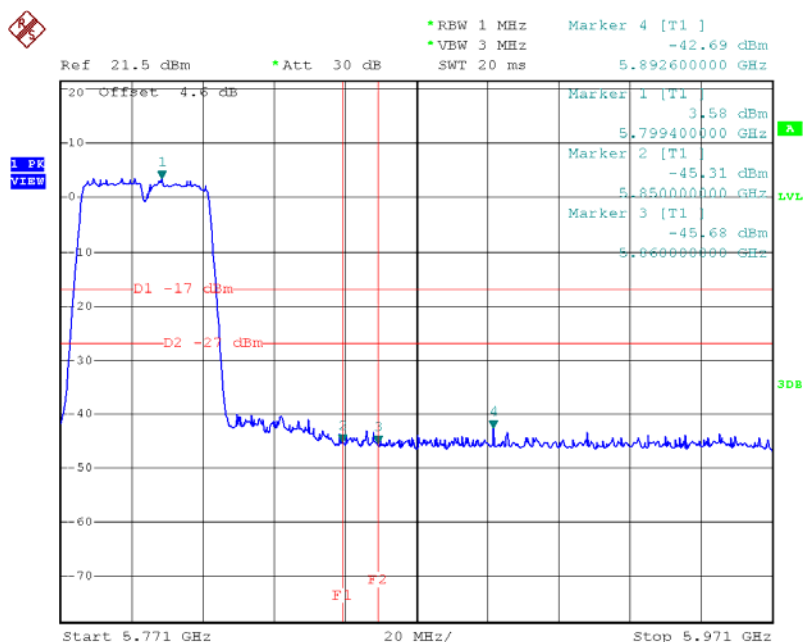

Date: 23.MAR.2016 10:44:20


Test Mode: UNII-3/TX N40 Mode_ANT 2

TX HT40 mode CH151

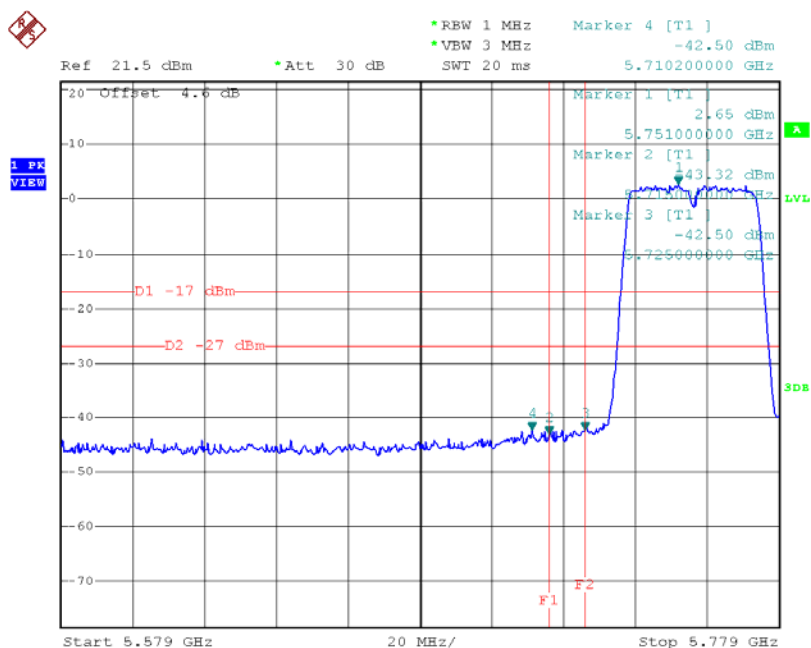

Date: 23.MAR.2016 14:18:09


HT40 mode CH159

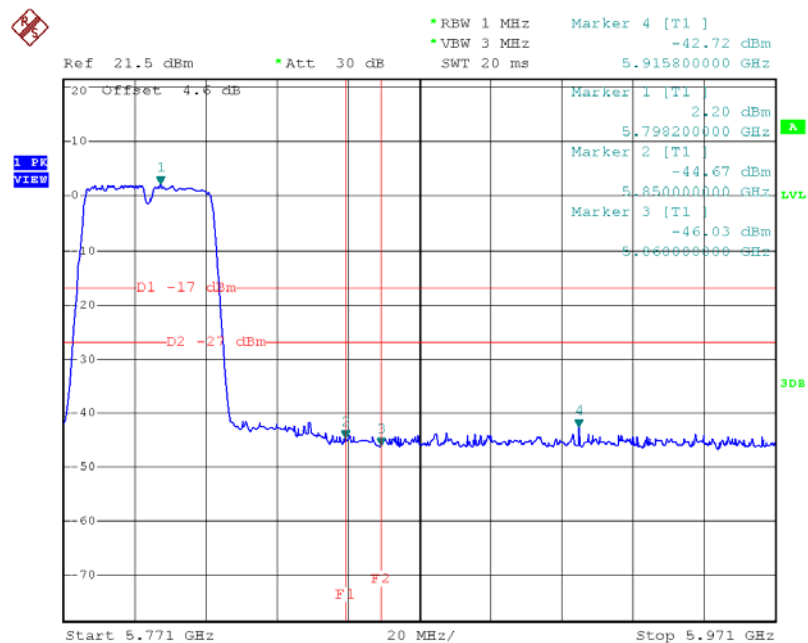

Date: 23.MAR.2016 14:19:37


Test Mode: UNII-1/TX AC(VHT20) Mode_ANT 1

TX mode CH36

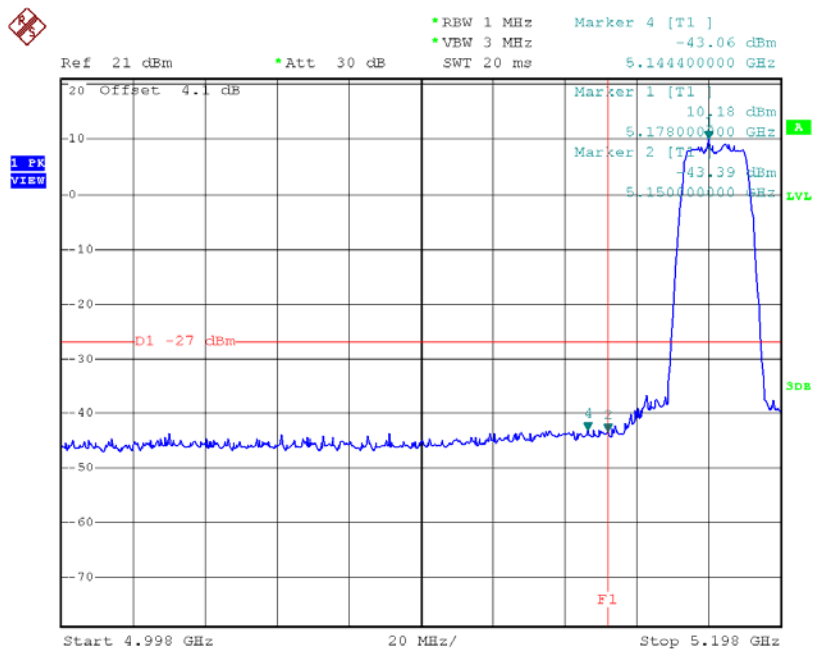

Date: 23.MAR.2016 11:12:17


TX mode CH48

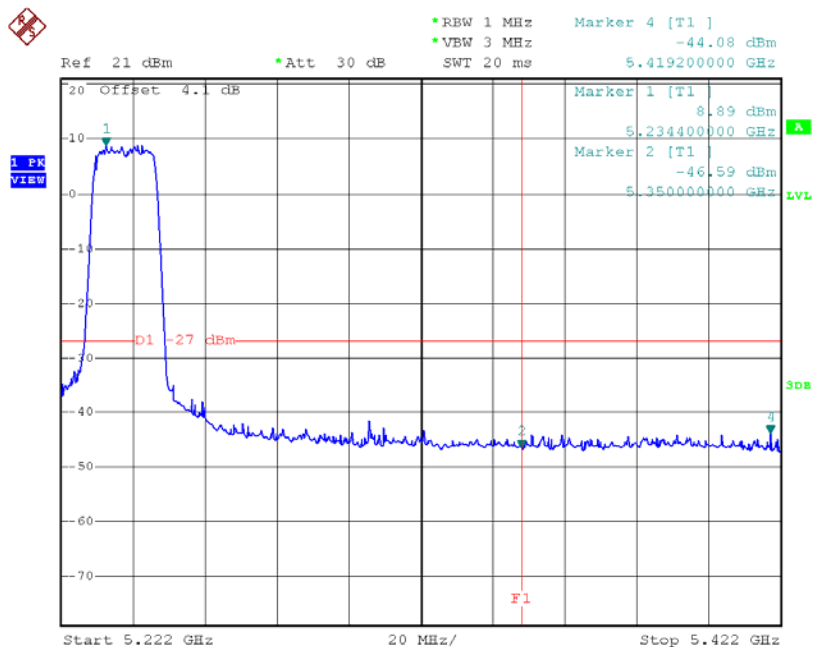

Date: 23.MAR.2016 11:14:39


Test Mode:	UNII-1/TX AC(VHT20) Mode_ANT 2
------------	--------------------------------

TX mode CH36

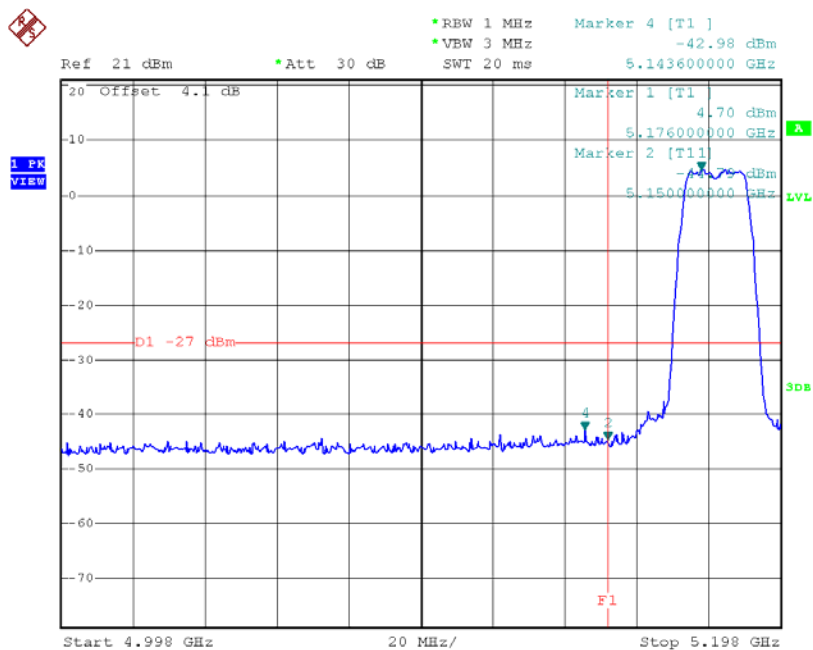

Date: 23.MAR.2016 13:22:54


TX mode CH48

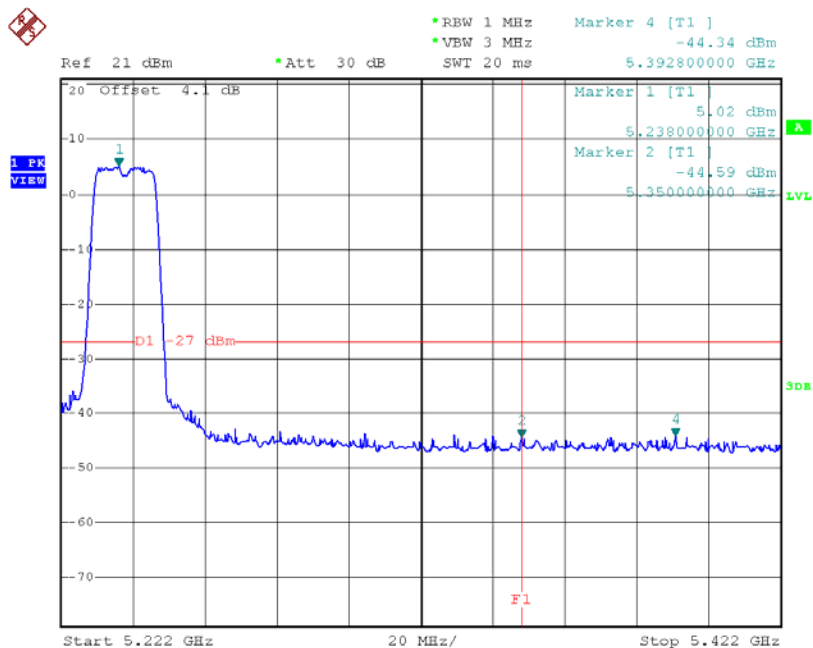

Date: 23.MAR.2016 13:24:45


Test Mode: UNII-1/TX AC(VHT40) Mode_ANT 1

TX mode CH38

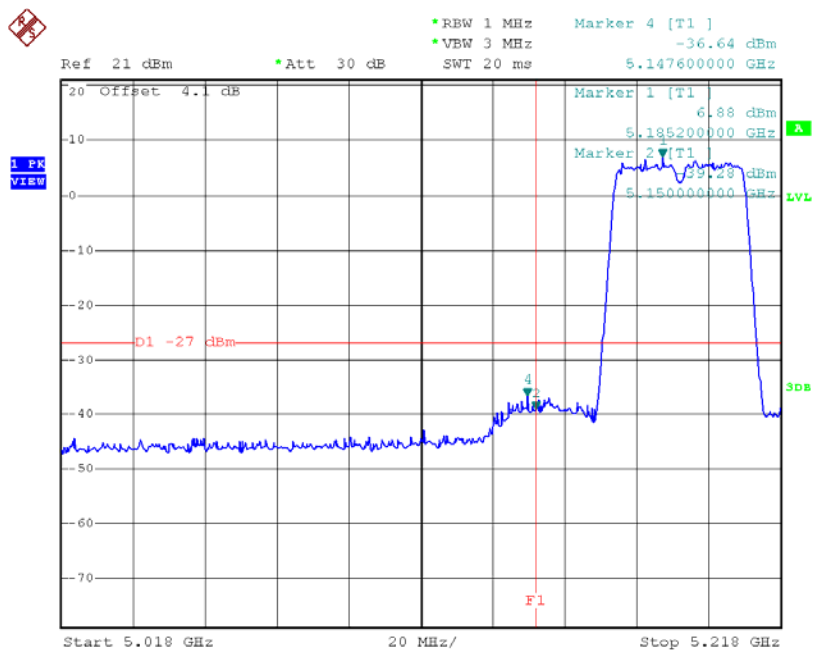

Date: 23.MAR.2016 11:19:14


TX mode CH46

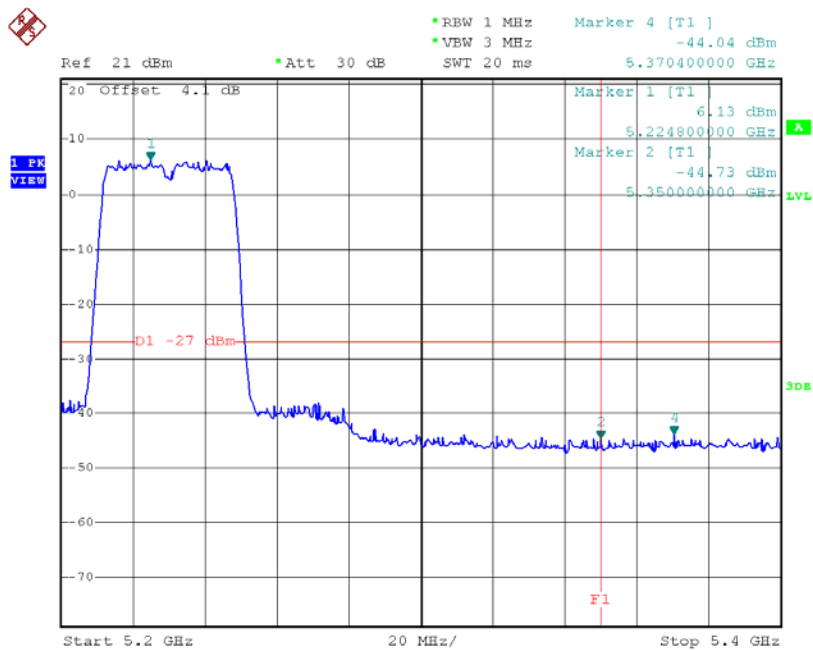

Date: 23.MAR.2016 11:20:22


Test Mode: UNII-1/TX AC(VHT40) Mode_ANT 2

TX mode CH38

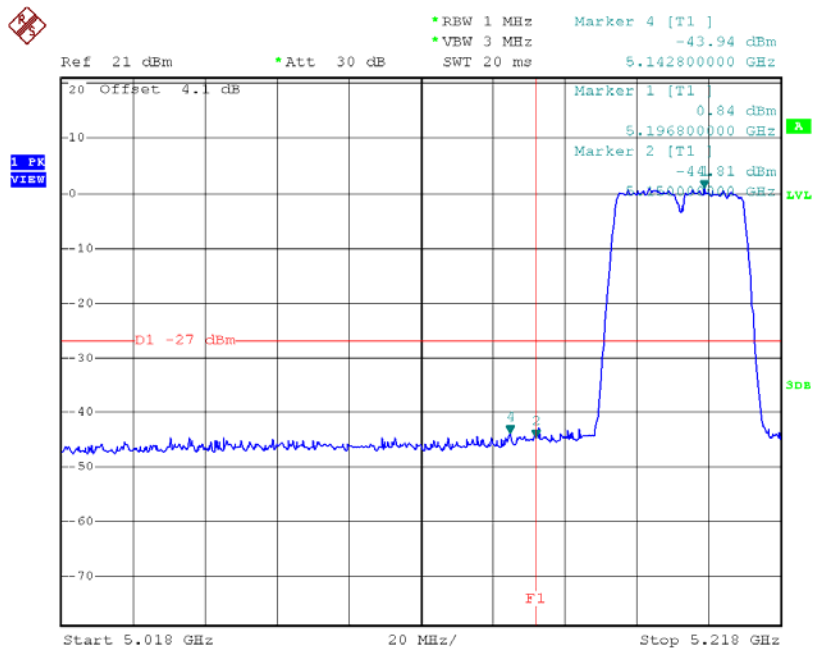

Date: 23.MAR.2016 13:29:34


TX mode CH46

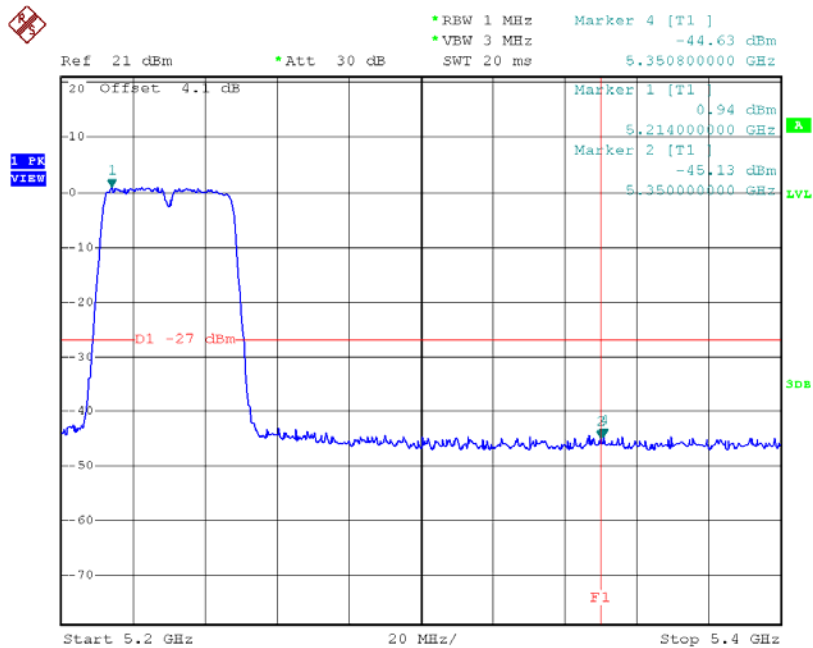

Date: 23.MAR.2016 13:30:32


Test Mode: UNII-1/TX AC(VHT80) Mode_ANT 1

TX mode CH42

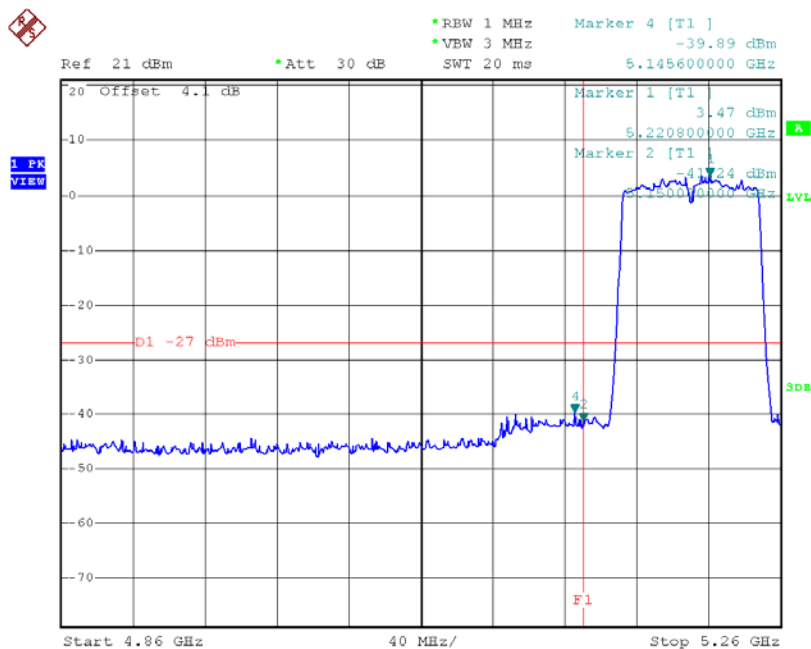

Date: 23.MAR.2016 11:20:56


TX mode CH42

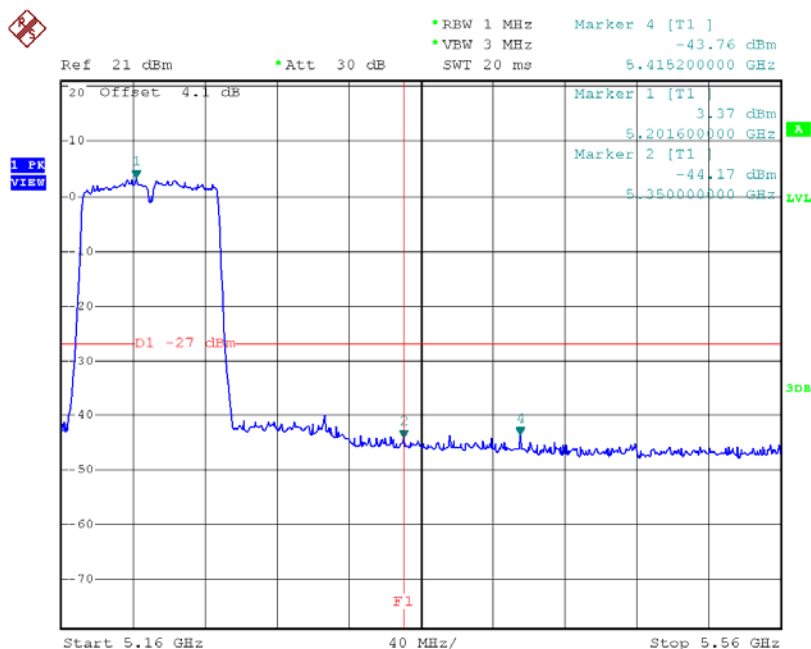

Date: 23.MAR.2016 11:21:04


Test Mode:	UNII-1/TX AC(VHT80) Mode_ANT 2
------------	--------------------------------

TX mode CH42

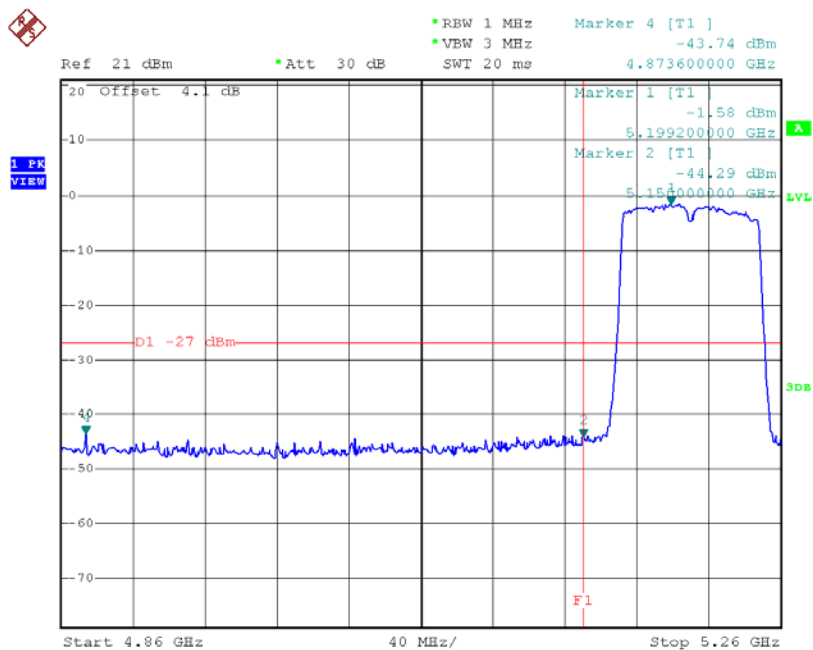

Date: 23.MAR.2016 13:31:45


TX mode CH42

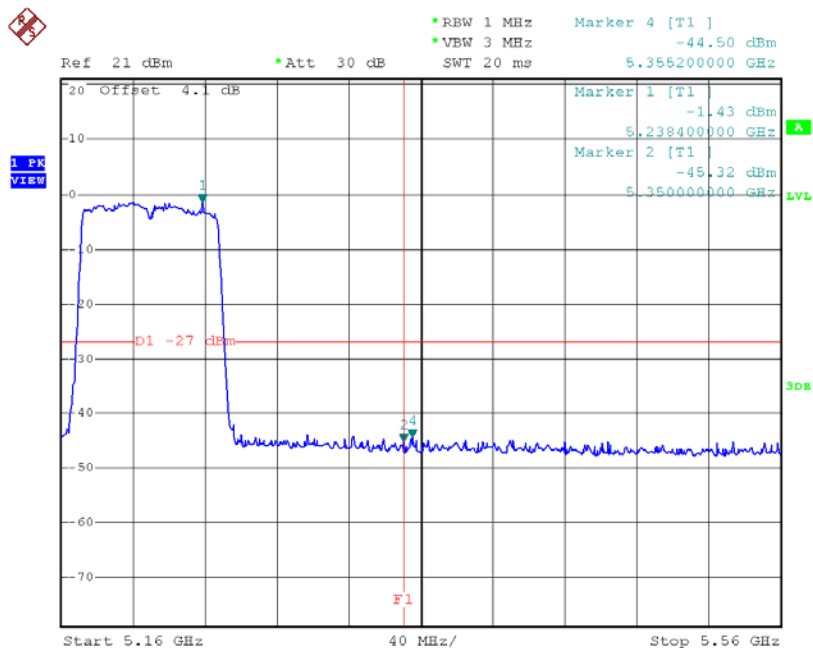

Date: 23.MAR.2016 13:31:52


Test Mode: UNII-2A/TX AC(VHT20) Mode_ANT 1

TX mode CH52

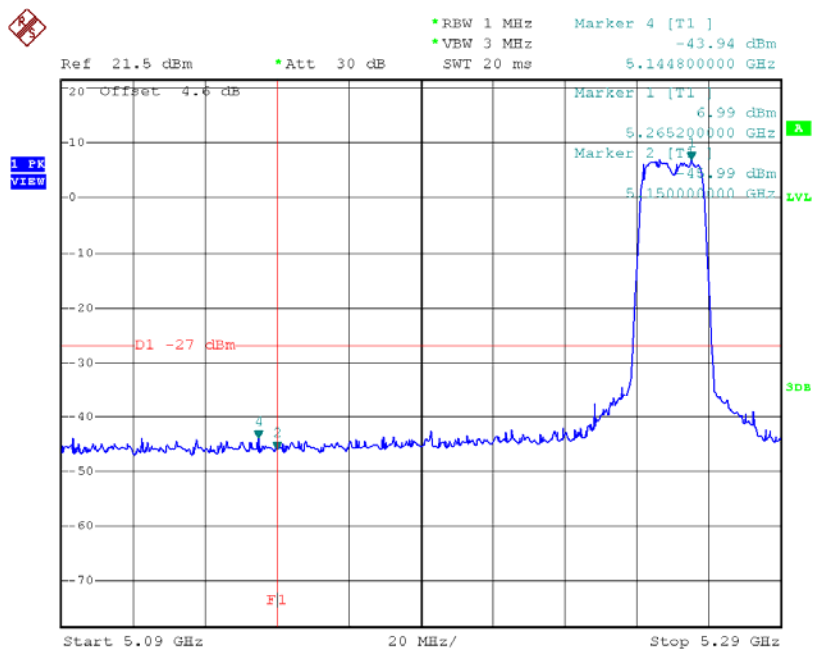

Date: 23.MAR.2016 10:18:24


TX mode CH64

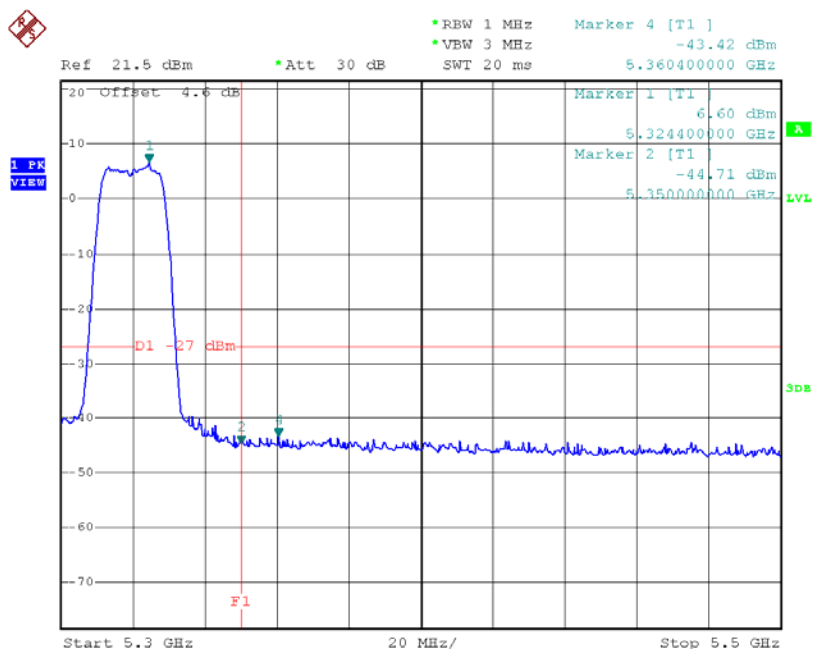

Date: 23.MAR.2016 10:21:08


Test Mode: UNII-2A/TX AC(VHT20) Mode_ANT 2

TX mode CH52

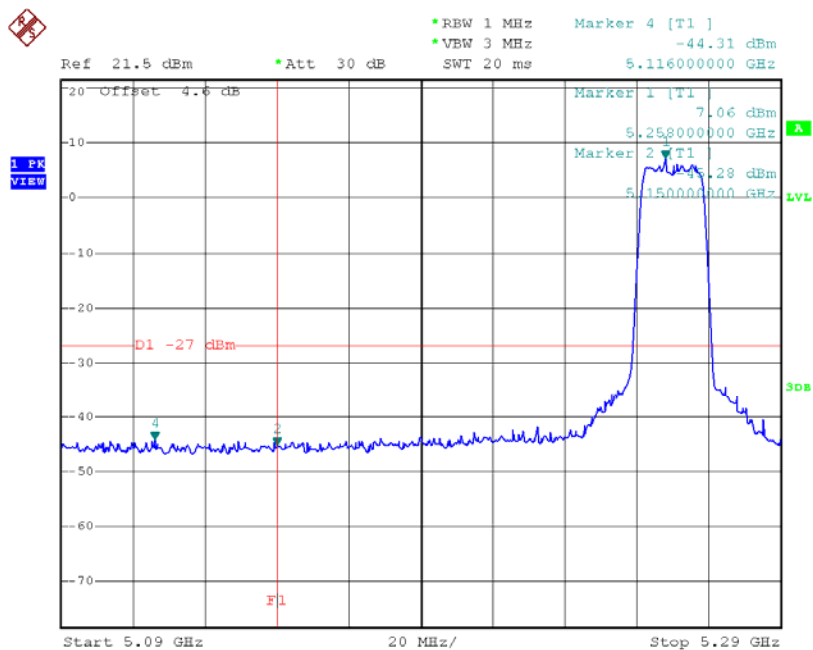

Date: 23.MAR.2016 13:51:12


TX mode CH64

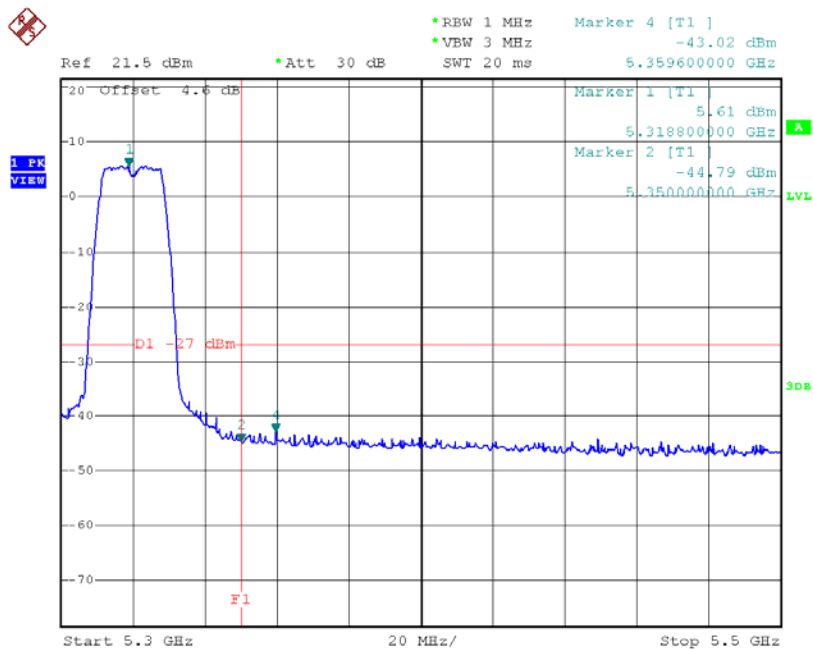

Date: 23.MAR.2016 13:54:25


Test Mode: UNII-2A/TX AC(VHT40) Mode_ANT 1

TX mode CH54

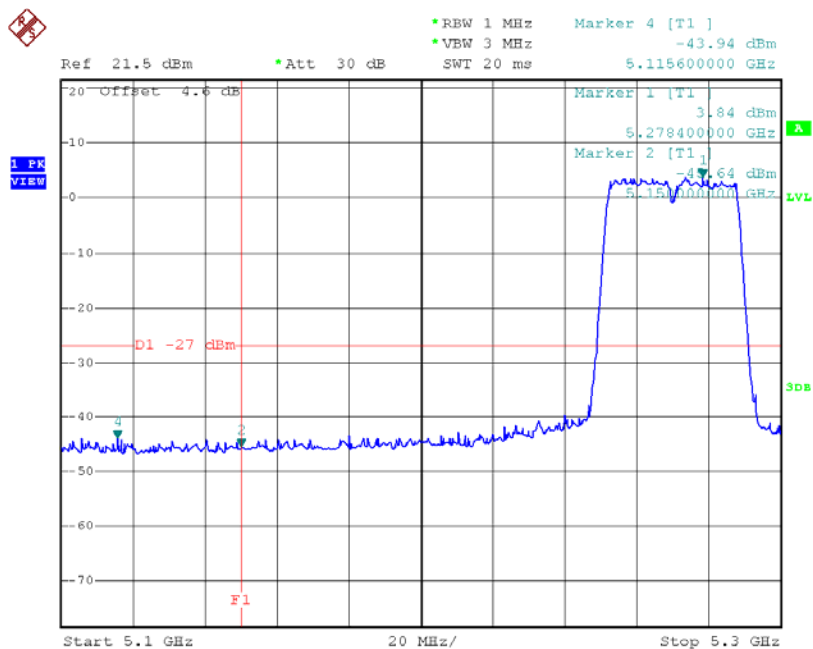

Date: 23.MAR.2016 10:45:51


TX mode CH62

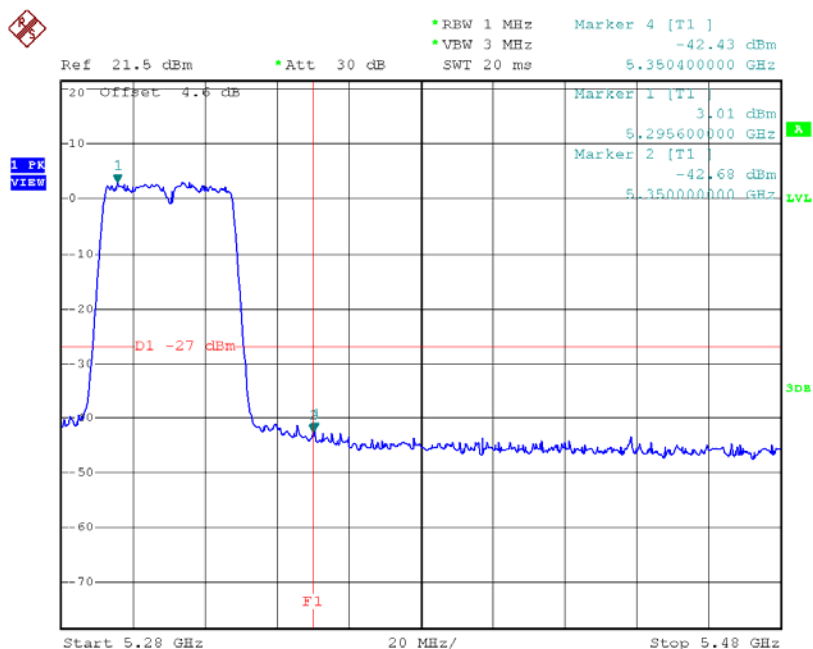

Date: 23.MAR.2016 10:47:41


Test Mode: UNII-2A/TX AC(VHT40) Mode_ANT 2

TX mode CH54

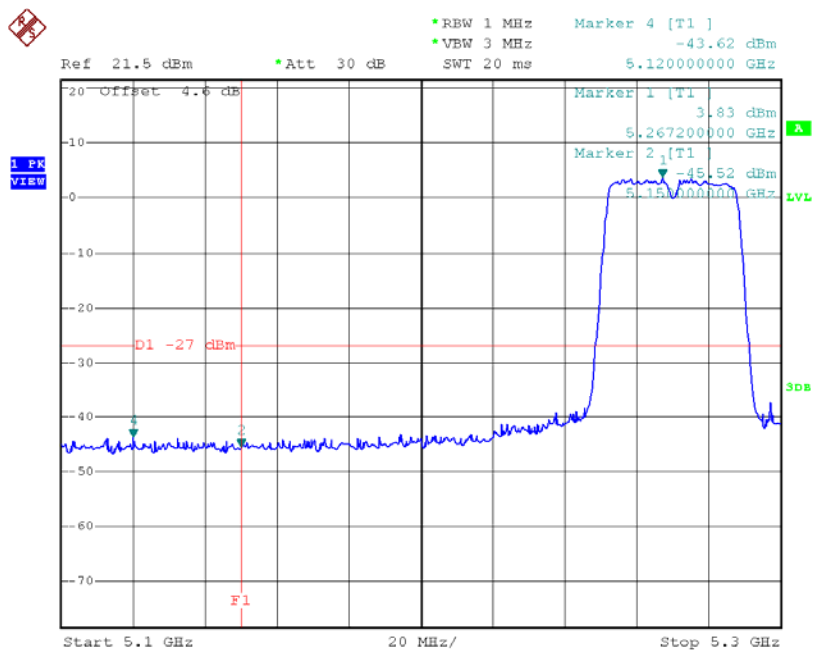

Date: 23.MAR.2016 14:21:56


TX mode CH62

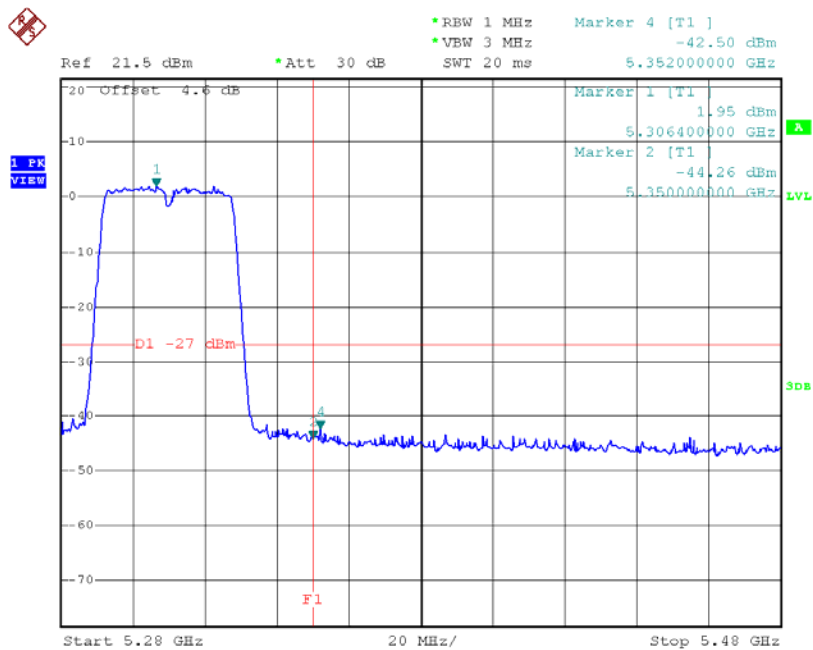

Date: 23.MAR.2016 14:24:15


Test Mode: UNII-2A/TX AC(VHT80) Mode_ANT 1

TX mode CH58

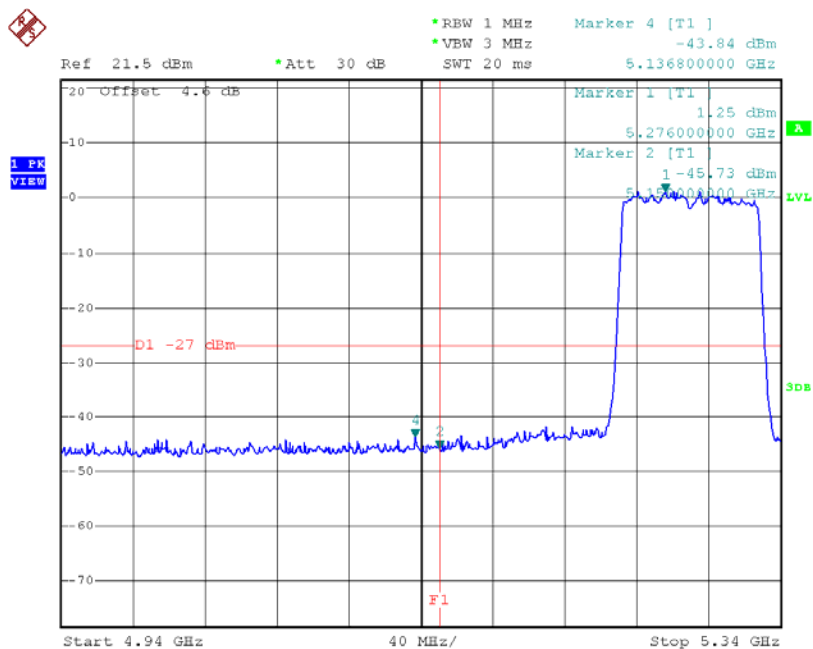

Date: 23.MAR.2016 10:55:52


TX mode CH58

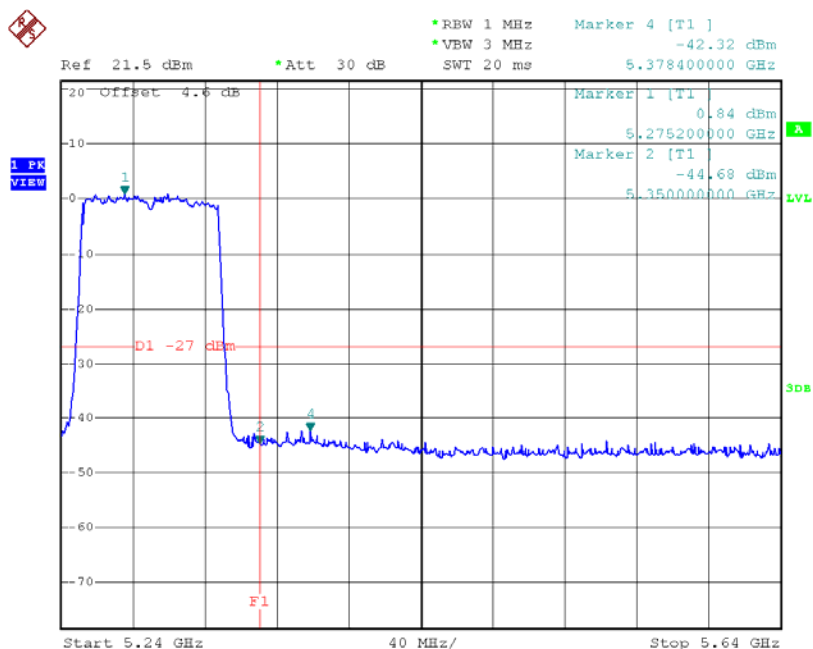

Date: 23.MAR.2016 10:56:00


Test Mode: UNII-2A/TX AC(VHT80) Mode_ANT 2

TX mode CH58

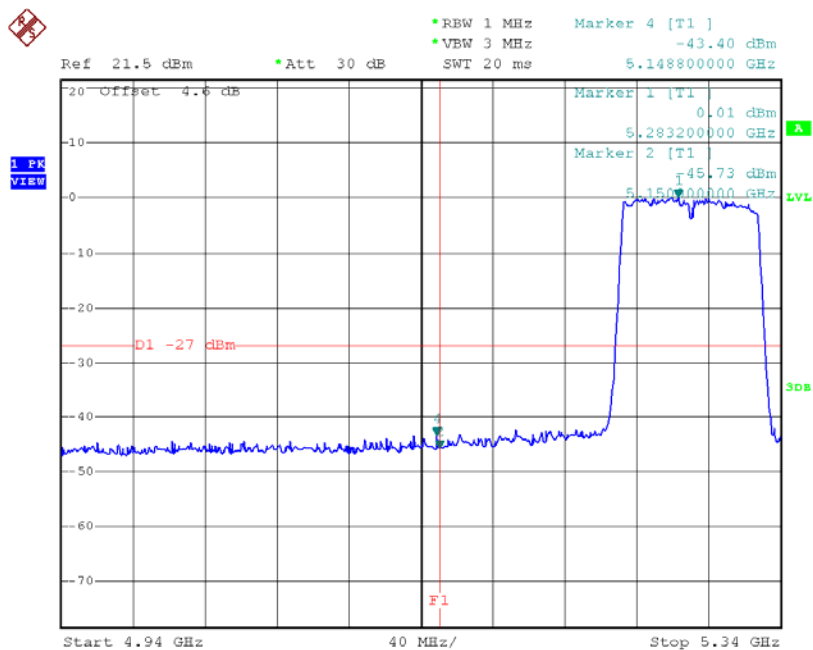

Date: 23.MAR.2016 14:35:56


TX mode CH58

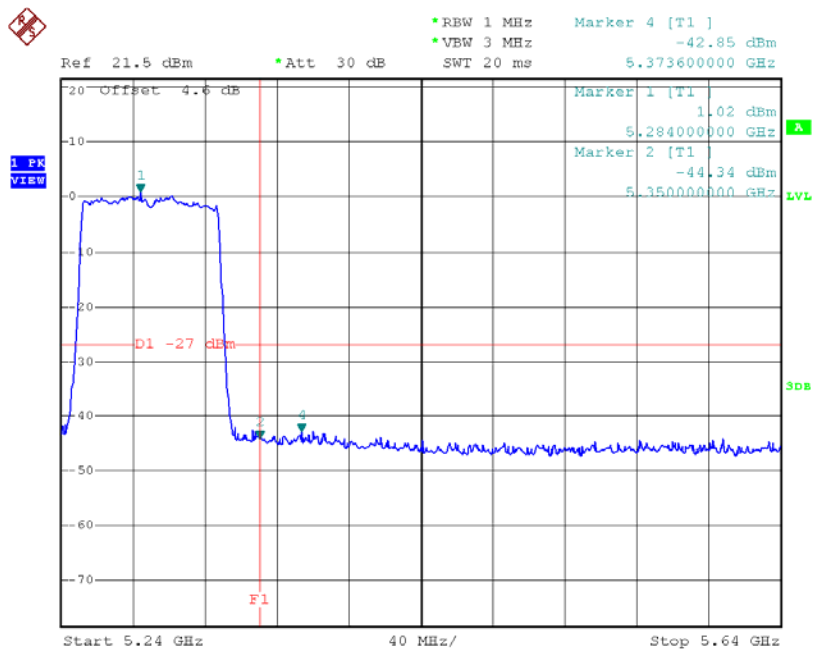

Date: 23.MAR.2016 14:36:04


Test Mode: UNII-2C/TX AC(VHT20) Mode_ANT 1

TX mode CH100

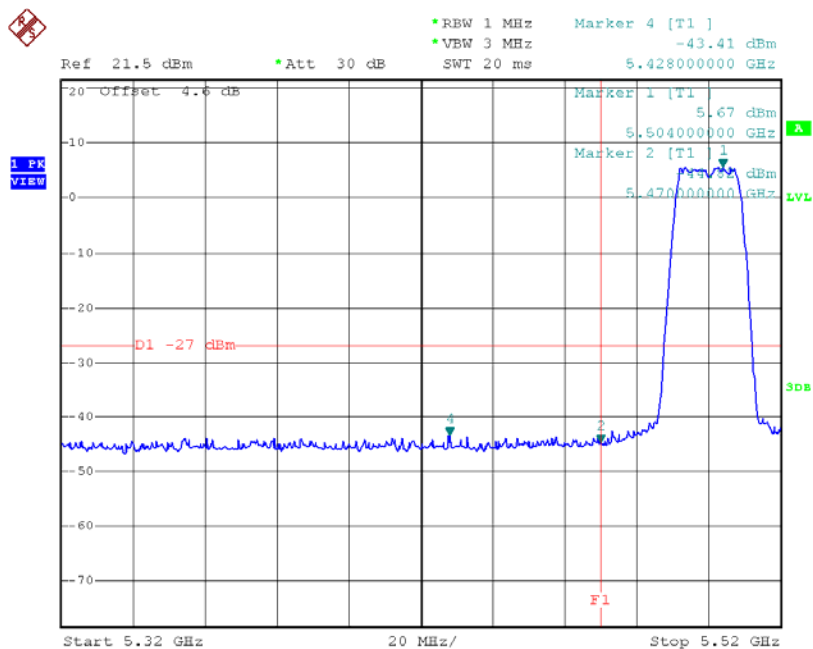

Date: 23.MAR.2016 10:22:20


TX mode CH140

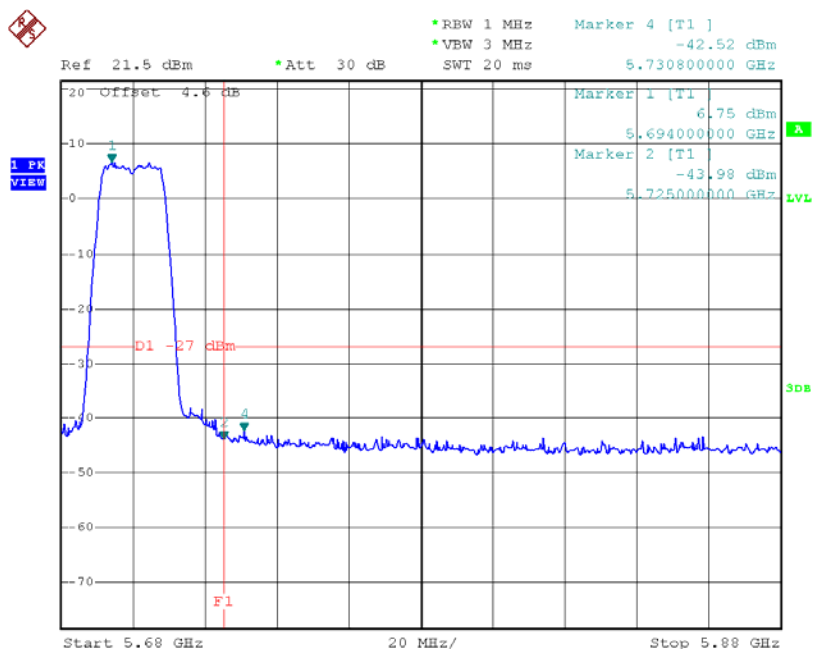

Date: 23.MAR.2016 10:26:08


Test Mode: UNII-2C/TX AC(VHT20) Mode_ANT 2

TX mode CH100

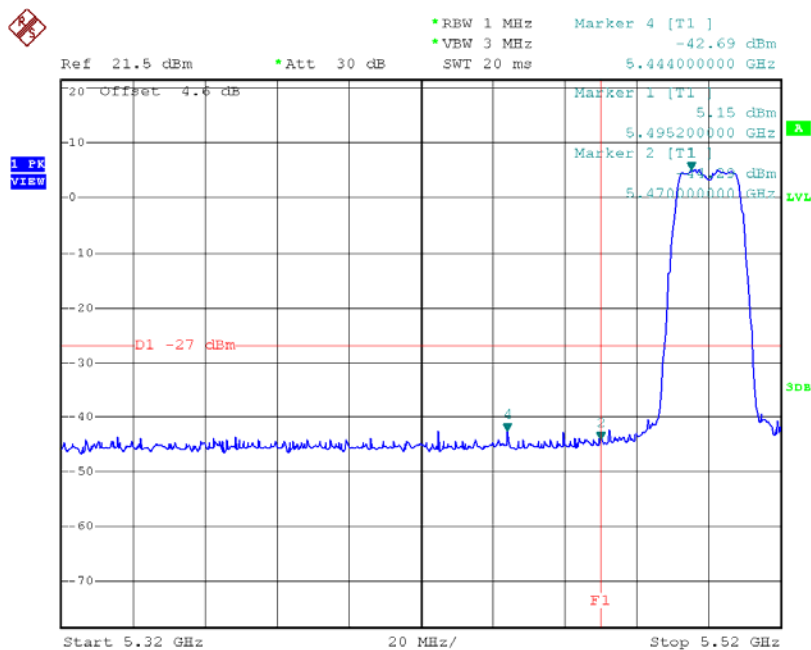

Date: 23.MAR.2016 13:55:40


TX mode CH140

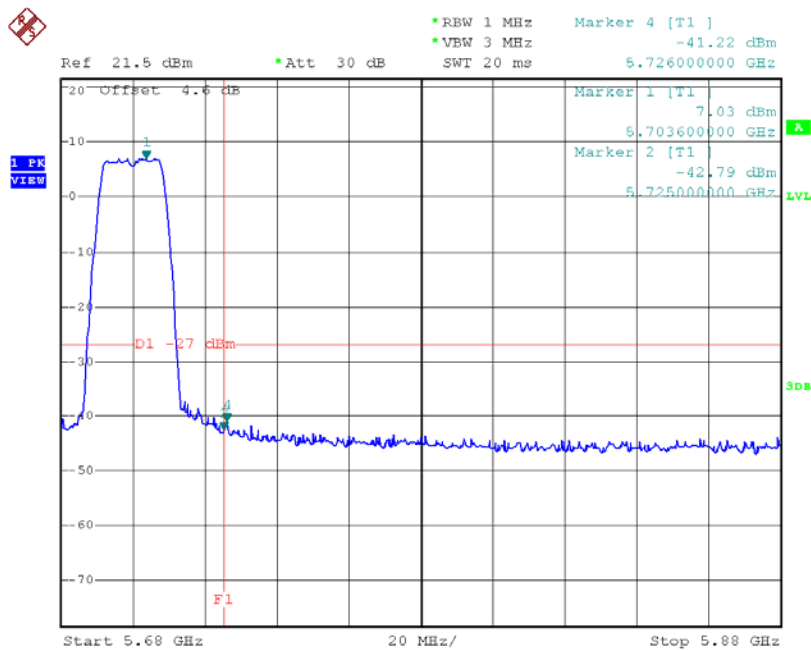

Date: 23.MAR.2016 13:57:41


Test Mode: UNII-2C/TX AC(VHT40) Mode_ANT 1

TX mode CH102

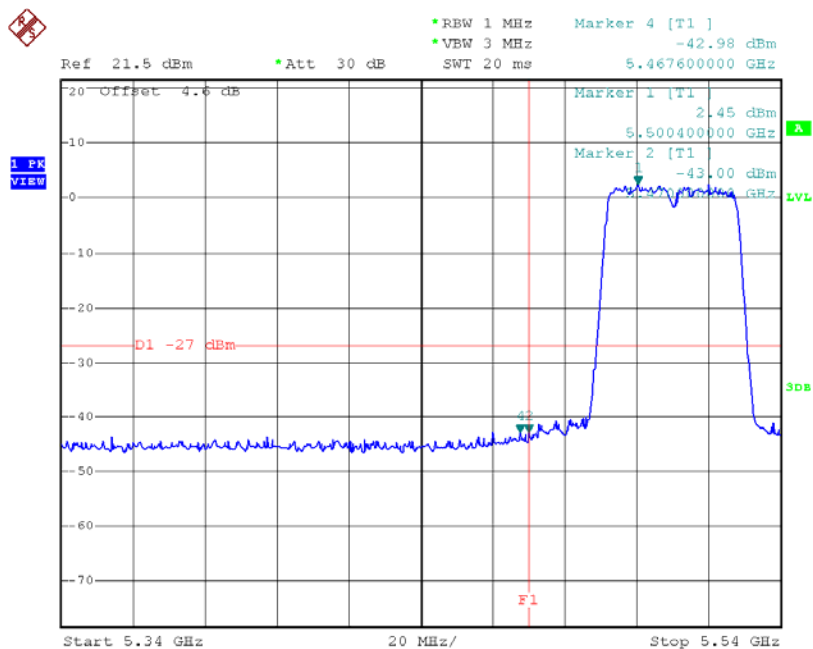

Date: 23.MAR.2016 10:48:53


TX mode CH134

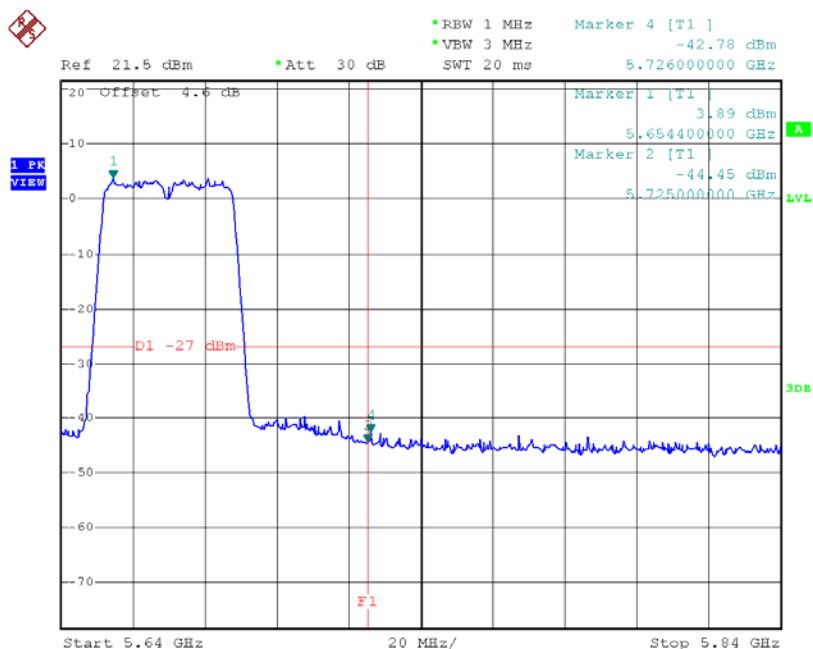

Date: 23.MAR.2016 10:51:51


Test Mode: UNII-2C/TX AC(VHT40) Mode_ANT 2

TX mode CH102

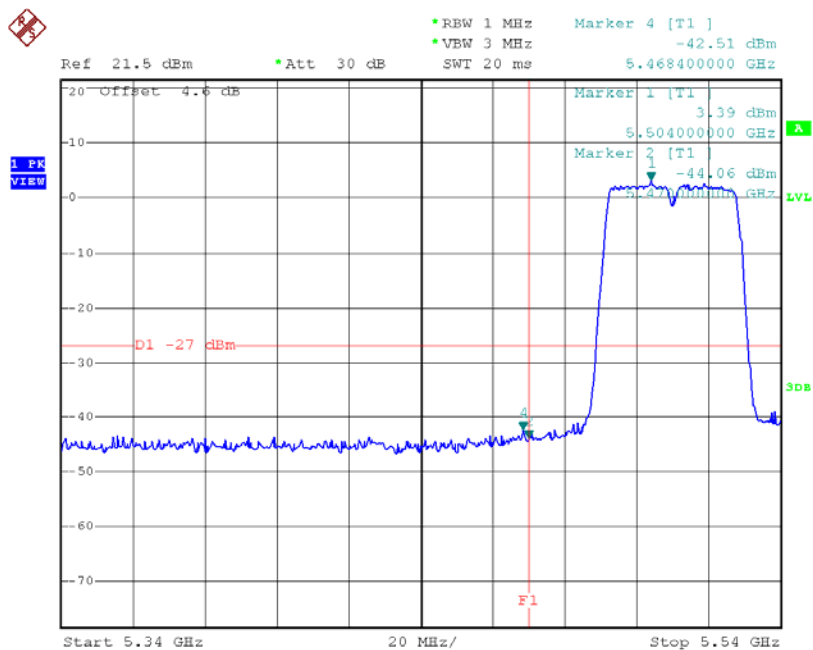

Date: 23.MAR.2016 14:25:31


TX mode CH134

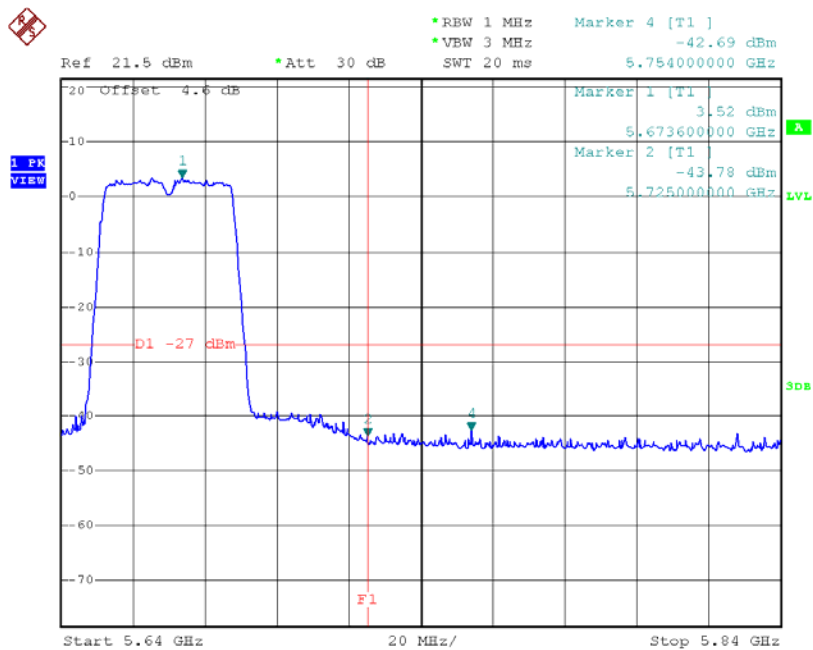

Date: 23.MAR.2016 14:31:12


Test Mode: UNII-2C/TX AC(VHT80) Mode_ANT 1

TX mode CH106

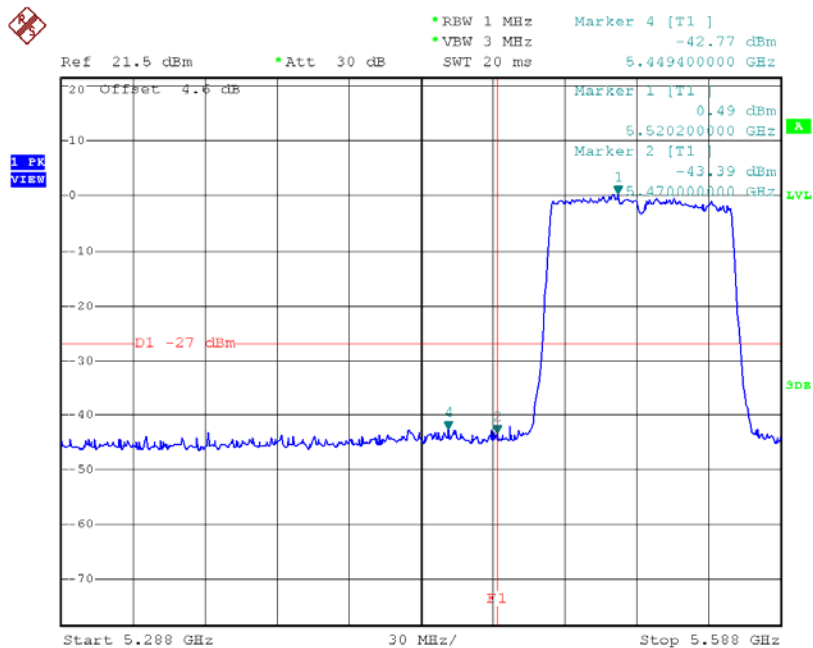

Date: 23.MAR.2016 10:57:14


TX mode CH122

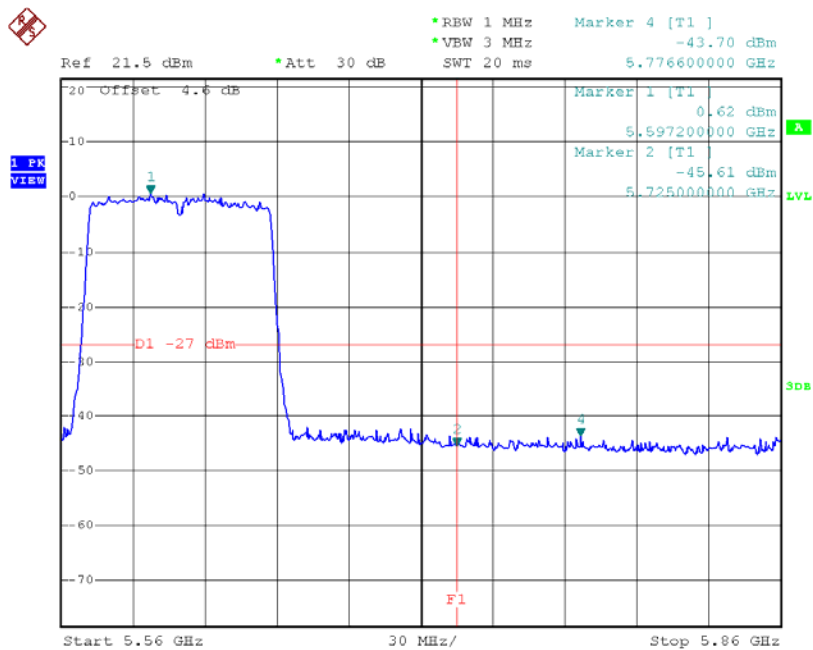

Date: 23.MAR.2016 11:00:27


Test Mode: UNII-2C/TX AC(VHT80) Mode_ANT 2

TX mode CH106

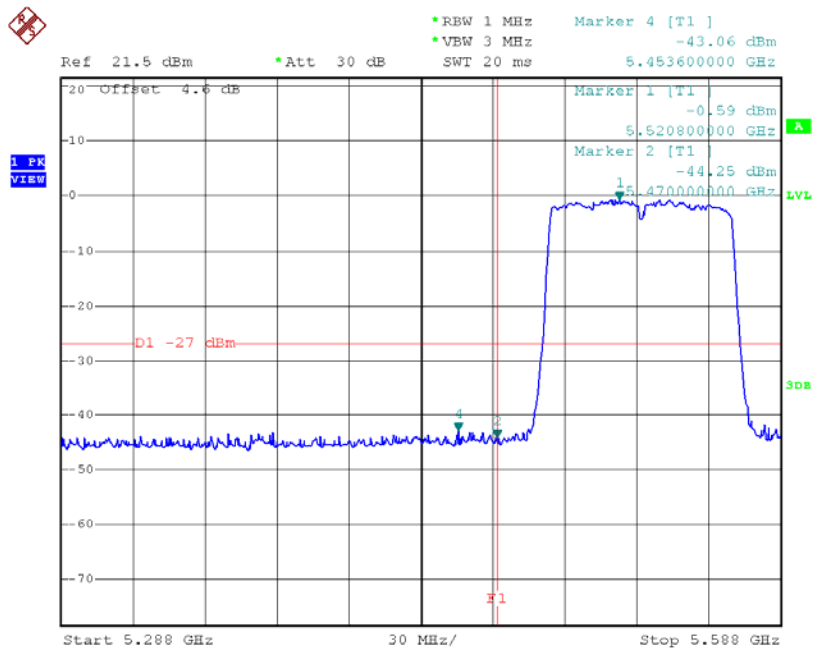

Date: 23.MAR.2016 14:37:41


TX mode CH122

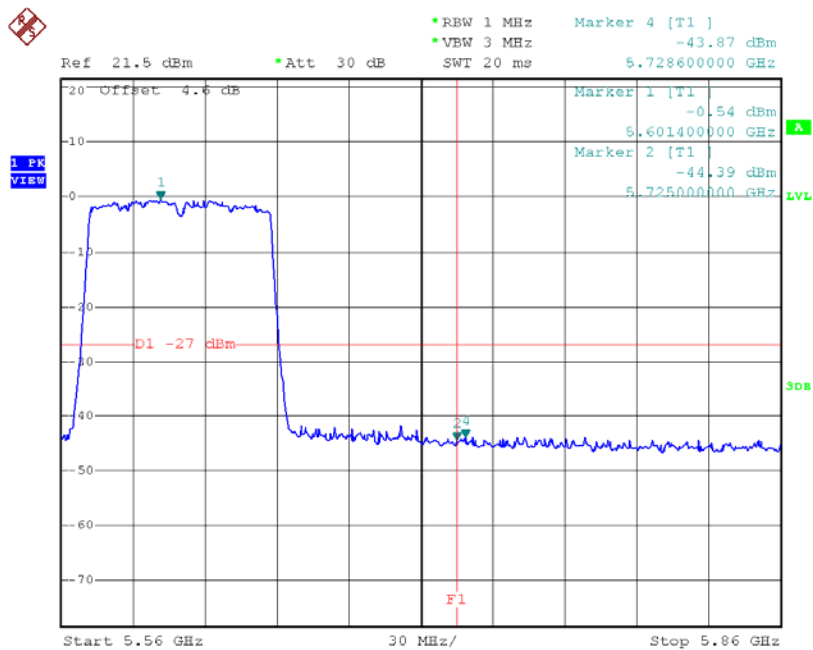

Date: 23.MAR.2016 14:40:07


Test Mode: UNII-3/TX AC(VHT20) Mode_ANT 1

TX AC HT20 mode CH149

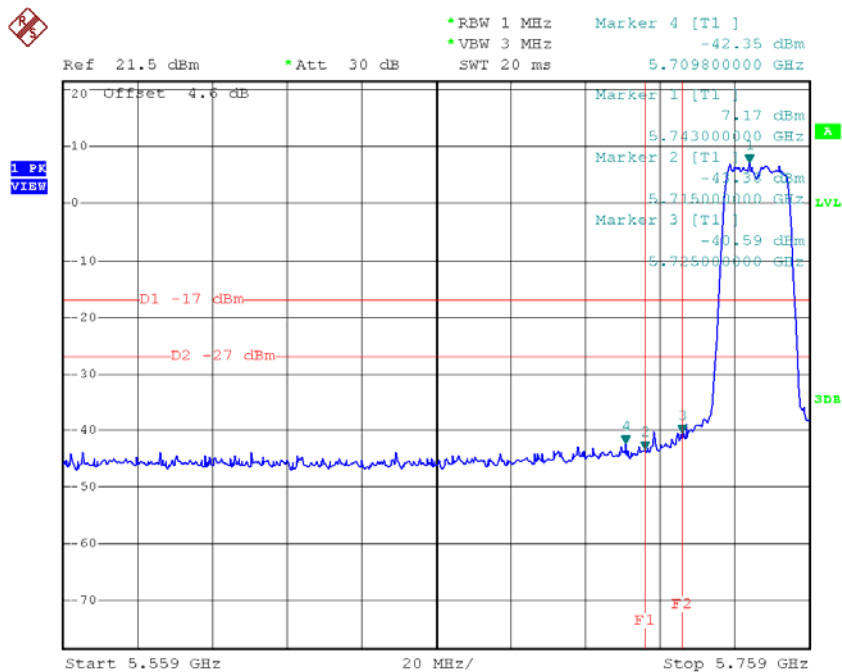

Date: 23.MAR.2016 10:27:26


TX AC HT20 mode CH165

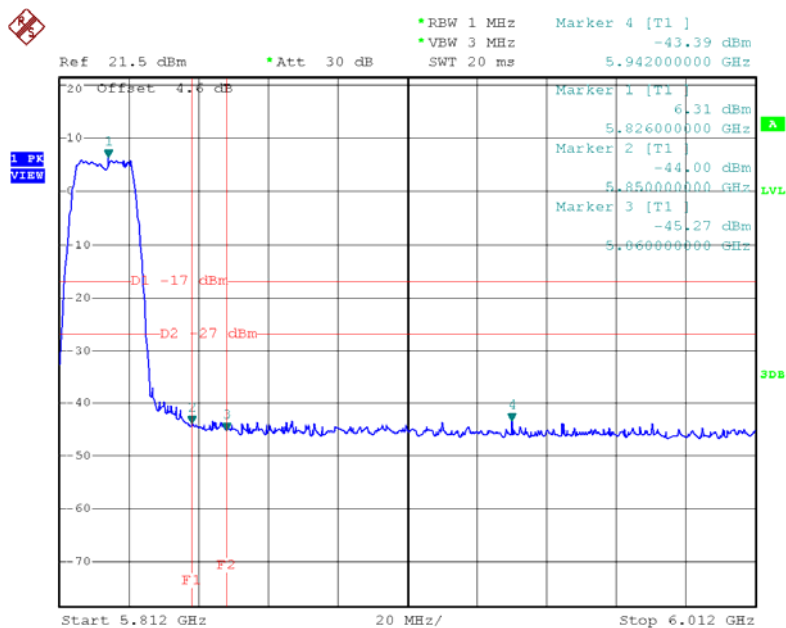

Date: 23.MAR.2016 10:29:35


Test Mode:	UNII-3/TX AC(VHT20) Mode_ANT 2
------------	--------------------------------

TX AC HT20 mode CH149

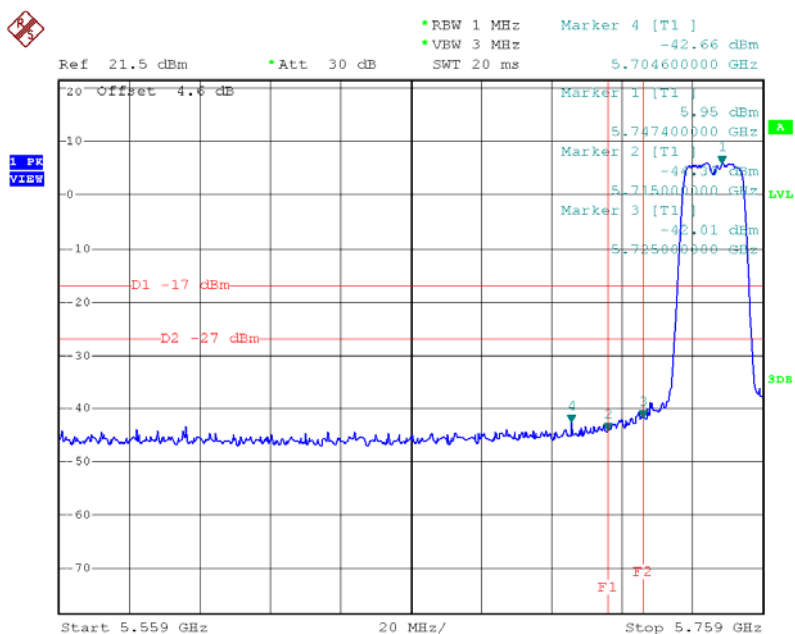

Date: 23.MAR.2016 13:59:03


TX AC HT20 mode CH165

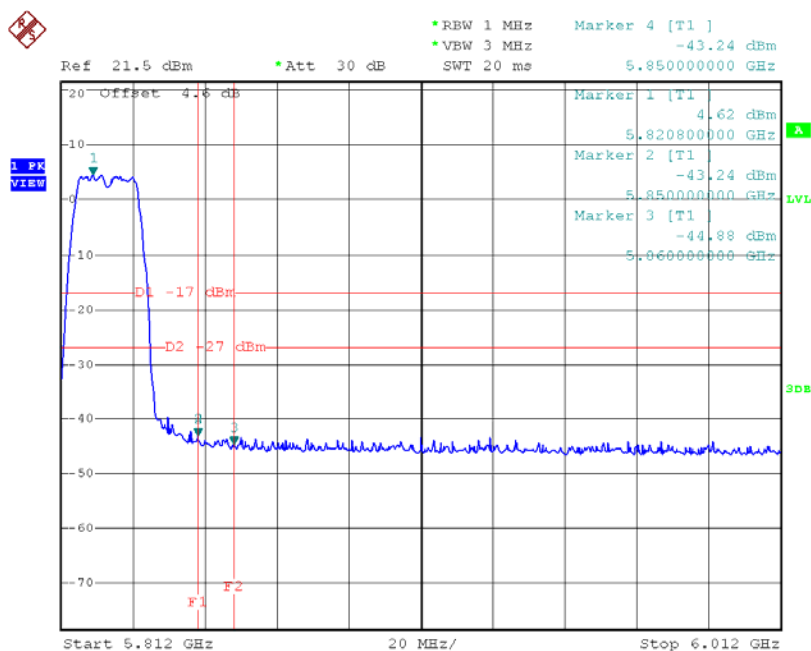

Date: 23.MAR.2016 14:03:07


Test Mode: UNII-3/TX AC(VHT40) Mode_ANT 1

TX AC HT40 mode CH151

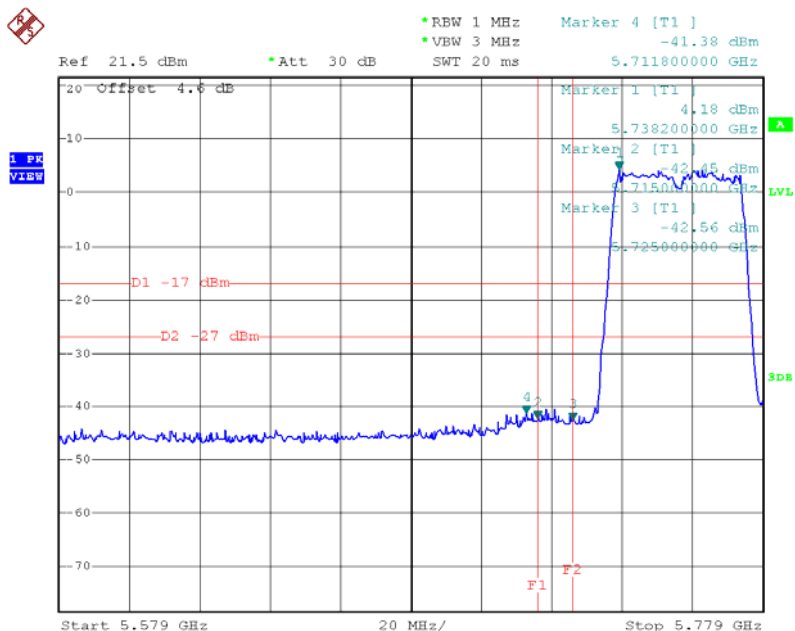

Date: 23.MAR.2016 10:53:05


TX AC HT40 mode CH159

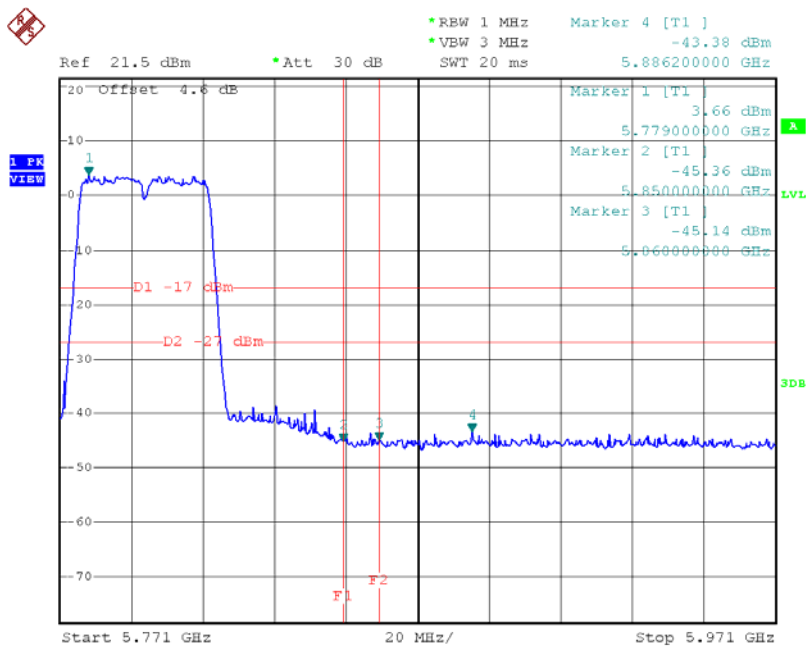

Date: 23.MAR.2016 10:54:15


Test Mode: UNII-3/TX AC(VHT40) Mode_ANT 2

TX AC HT40 mode CH151

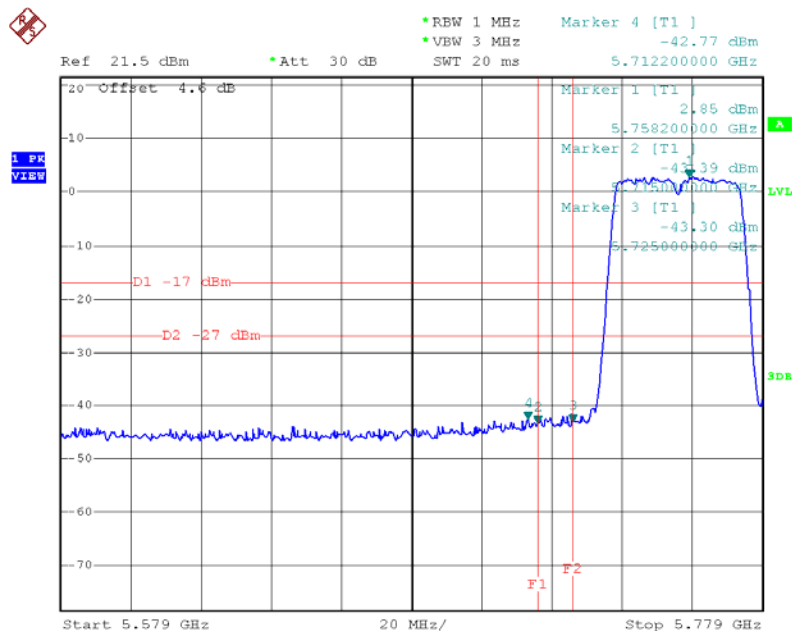

Date: 23.MAR.2016 14:32:41


TX AC HT40 mode CH159

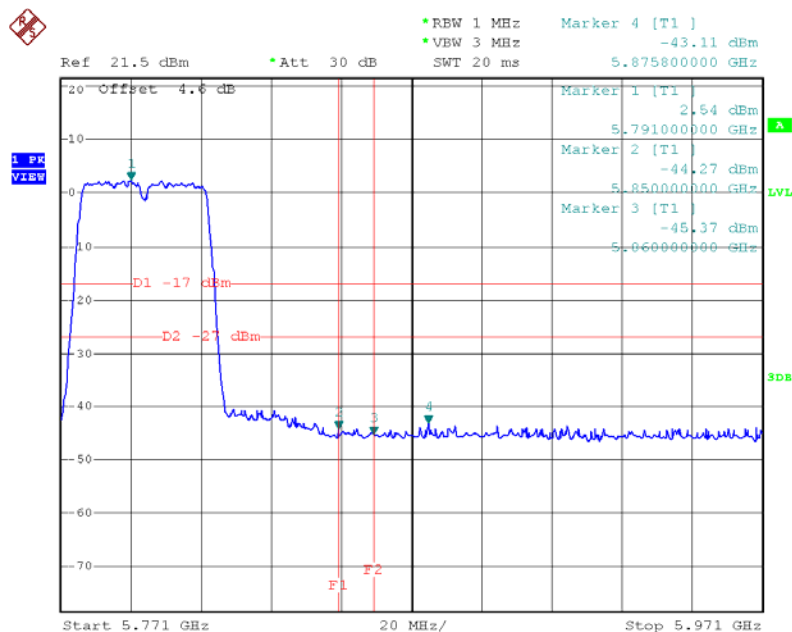

Date: 23.MAR.2016 14:33:57


Test Mode: UNII-3/TX AC(VHT80) Mode_ANT 1

TX AC HT80 mode CH155

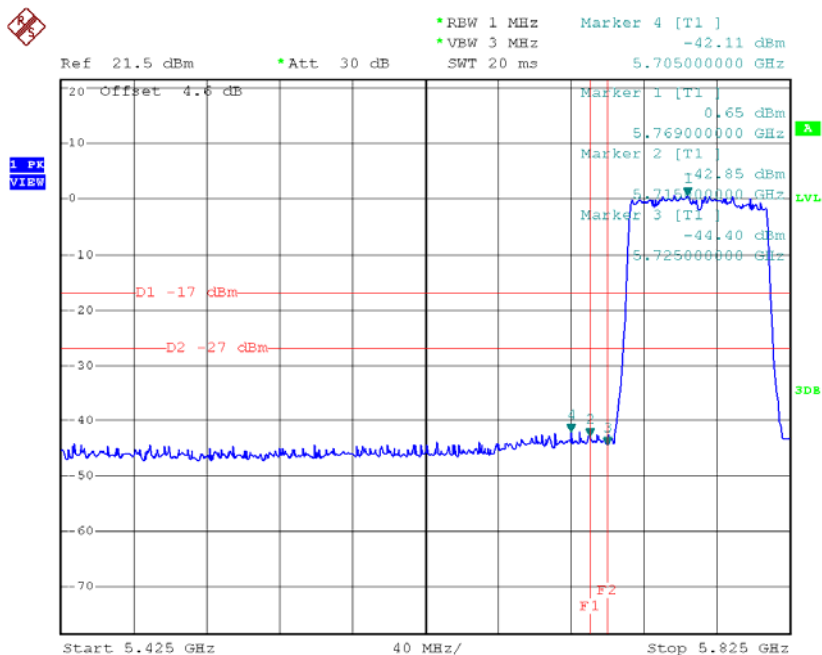

Date: 23.MAR.2016 11:01:54


TX AC HT80 mode CH155

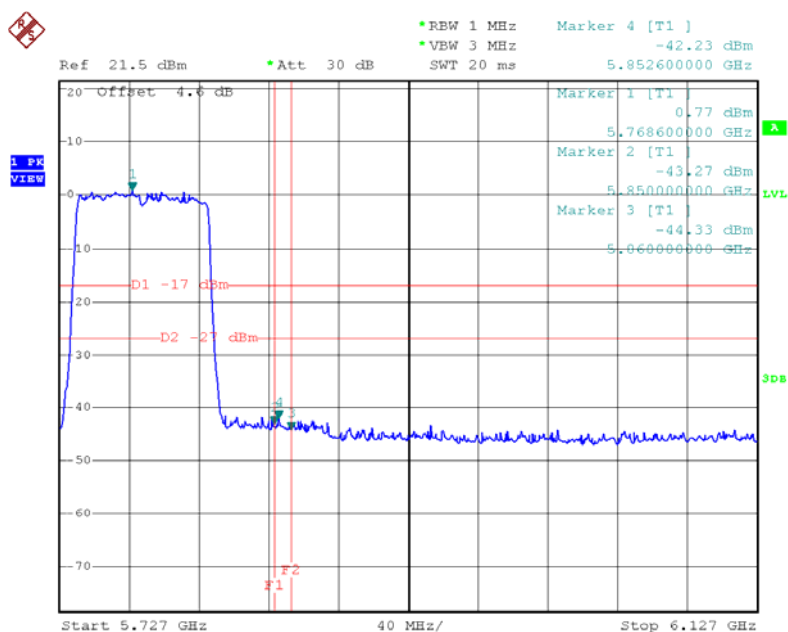

Date: 23.MAR.2016 11:02:01


Test Mode: UNII-3/TX AC(VHT80) Mode_ANT 2

TX AC HT80 mode CH155

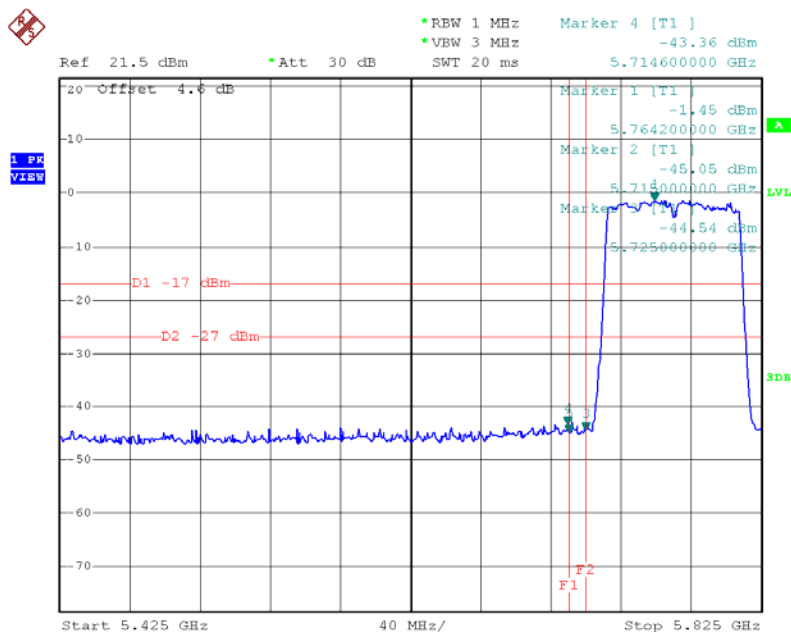

Date: 23.MAR.2016 14:41:38

TX AC HT80 mode CH155

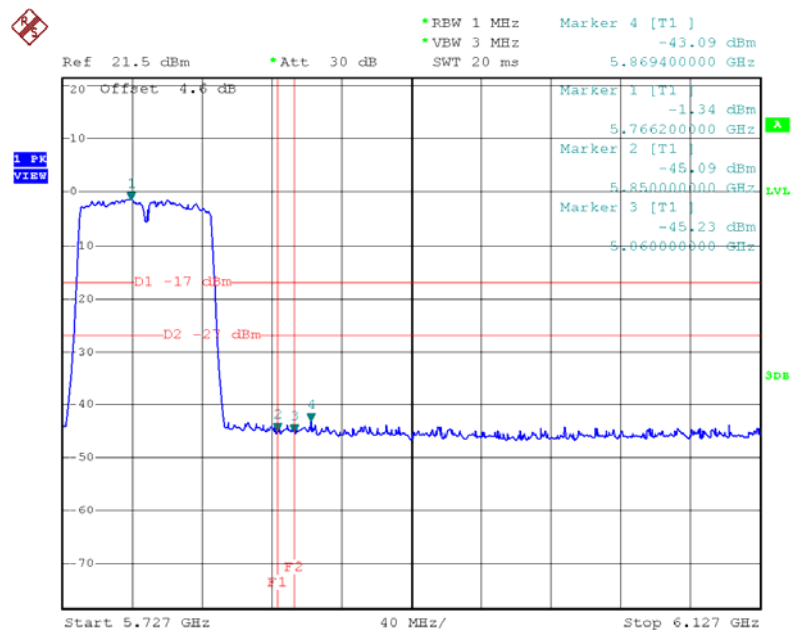


Date: 23.MAR.2016 14:41:45

ATTACHMENT H - POWER SPECTRAL DENSITY

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.52	0.26	1.78	17.00
CH40	5200	1.45	0.26	1.71	17.00
CH48	5240	1.36	0.26	1.62	17.00

CH36

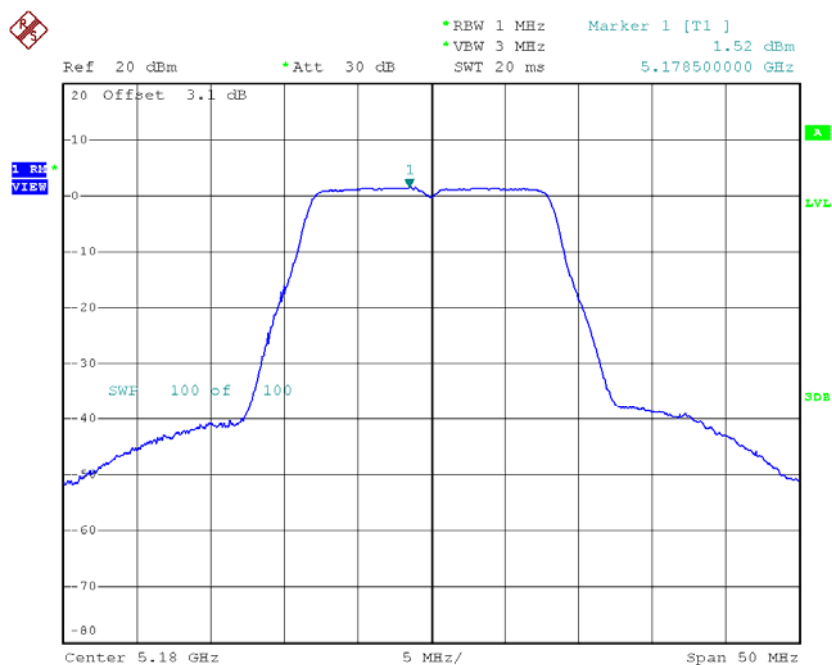


Date: 23.MAR.2016 09:05:39

CH40

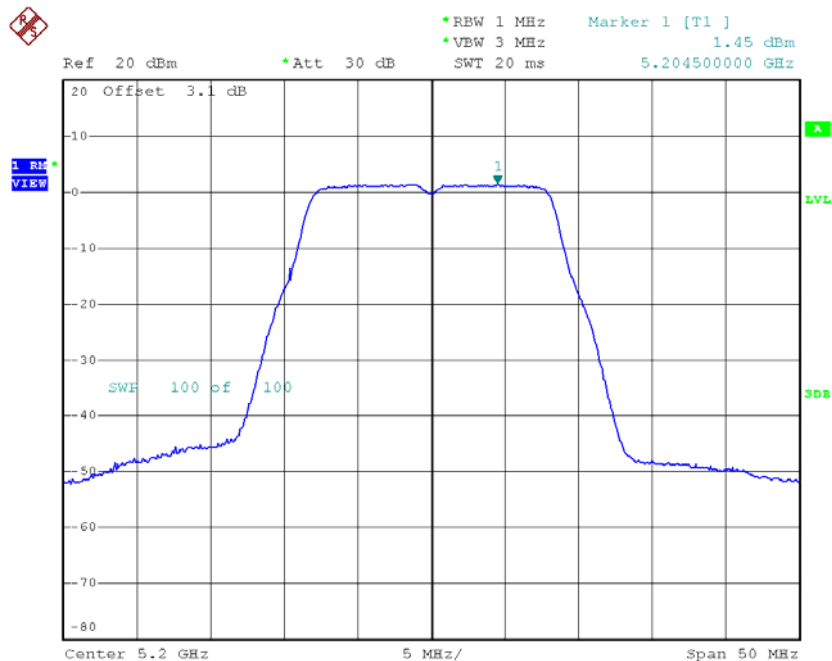

Date: 23.MAR.2016 09:11:10


CH48

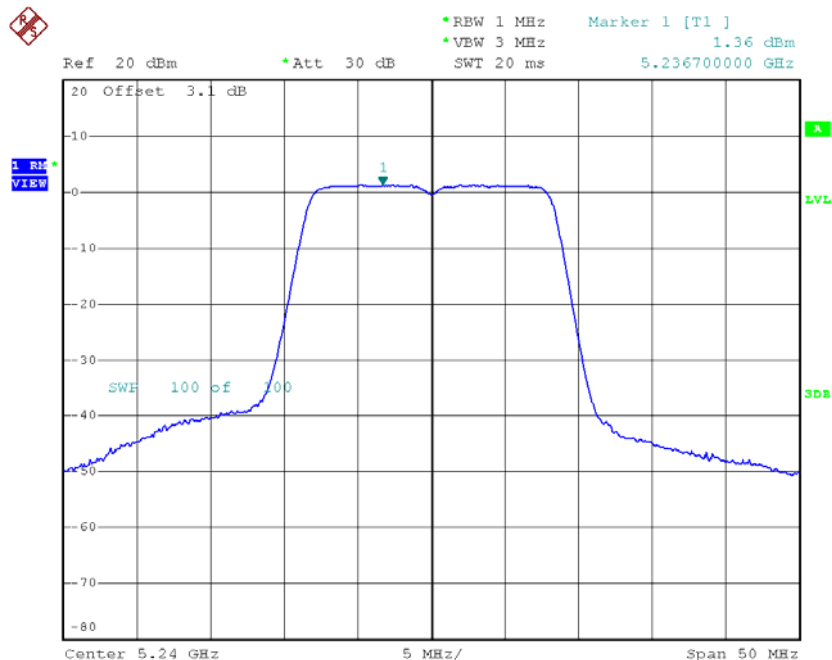

Date: 23.MAR.2016 09:12:07


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.14	0.48	0.62	17.00
CH40	5200	0.45	0.48	0.93	17.00
CH48	5240	-0.08	0.48	0.40	17.00

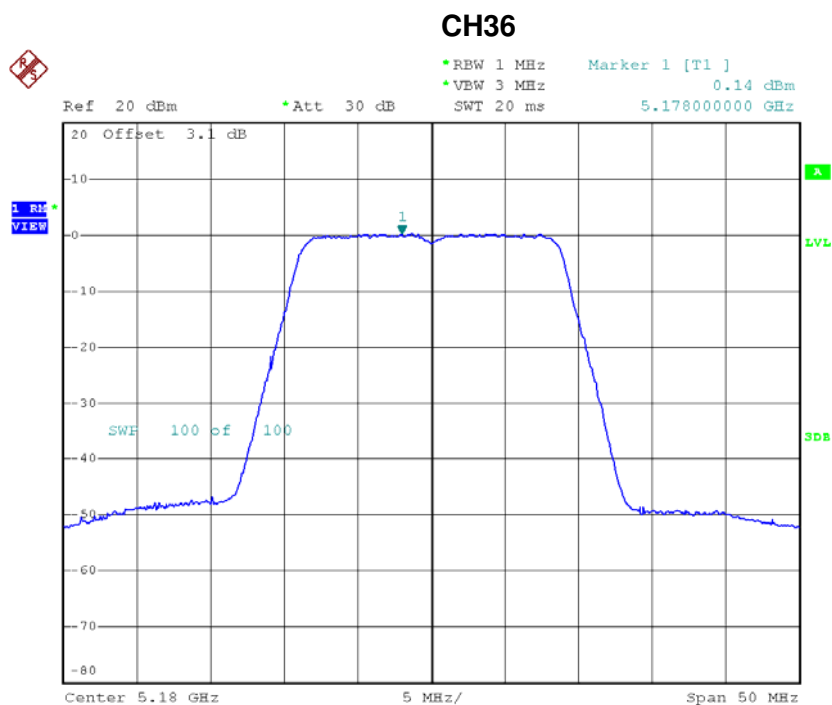


Date: 23.MAR.2016 11:07:03

CH40

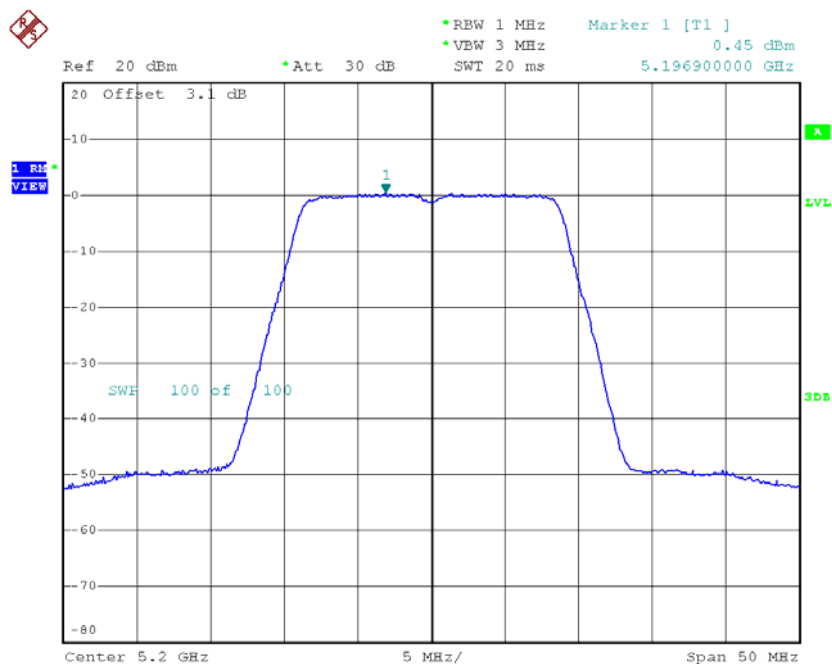

Date: 23.MAR.2016 11:09:04

CH48

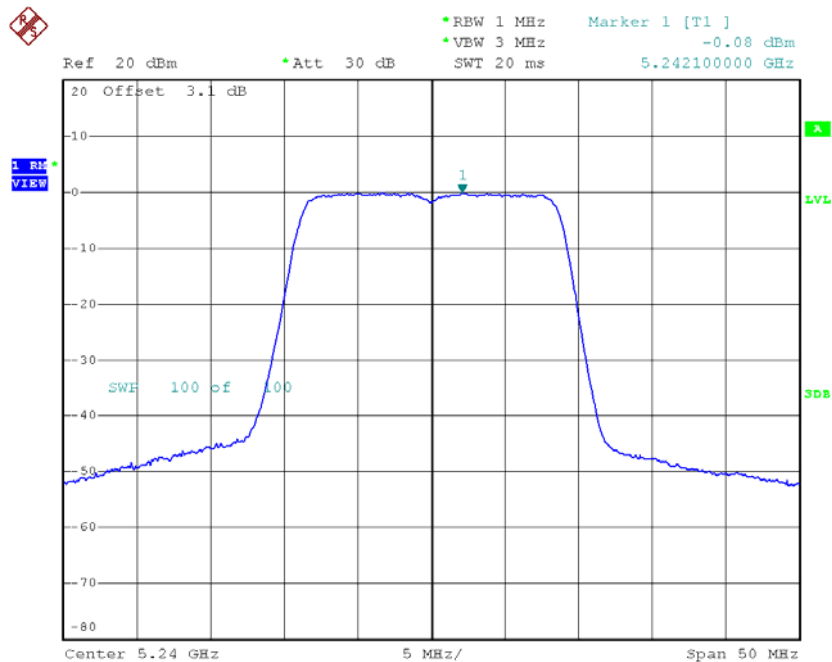


Date: 23.MAR.2016 11:10:46

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-4.11	0.48	-3.63	17.00
CH40	5200	-3.92	0.48	-3.44	17.00
CH48	5240	-3.71	0.48	-3.23	17.00

CH36

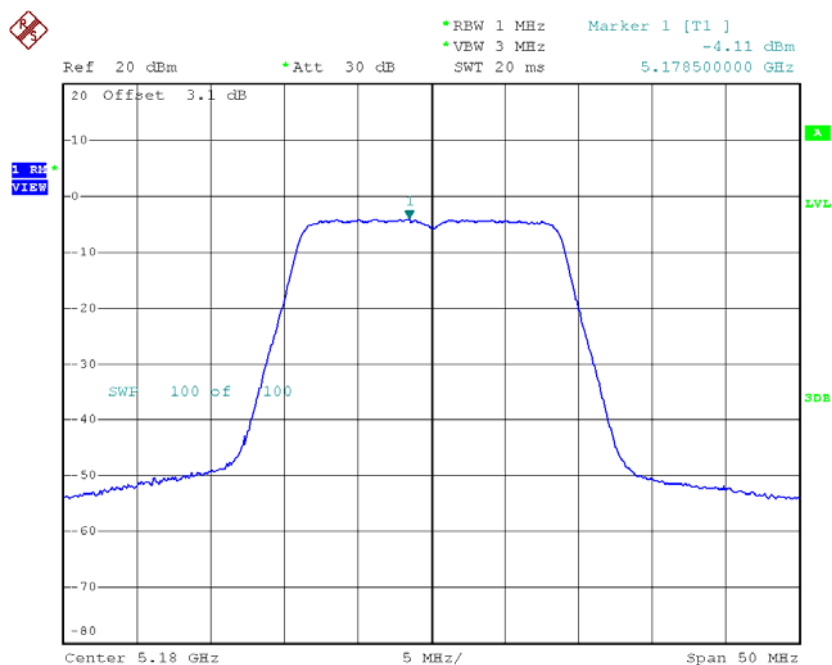


Date: 23.MAR.2016 13:19:11

CH40

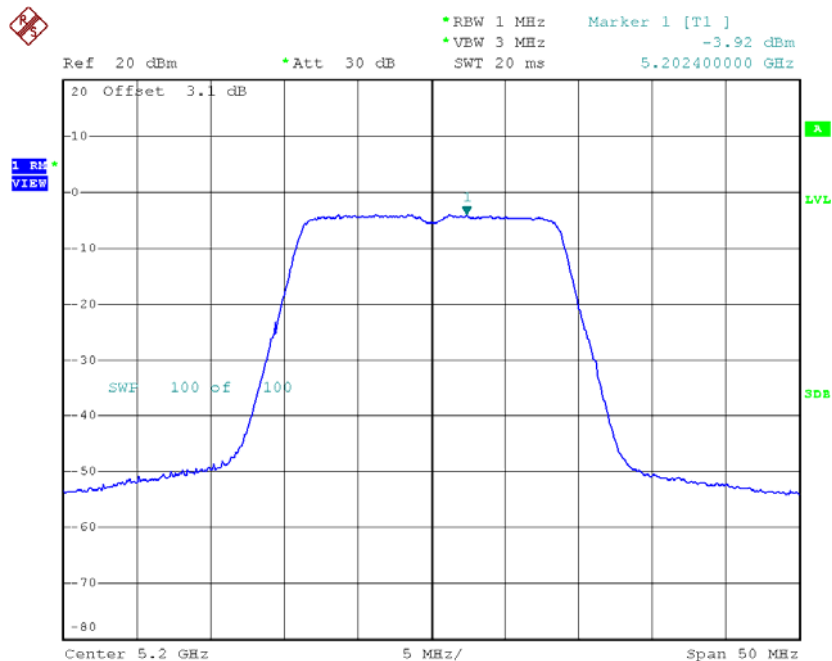

Date: 23.MAR.2016 13:20:17

CH48

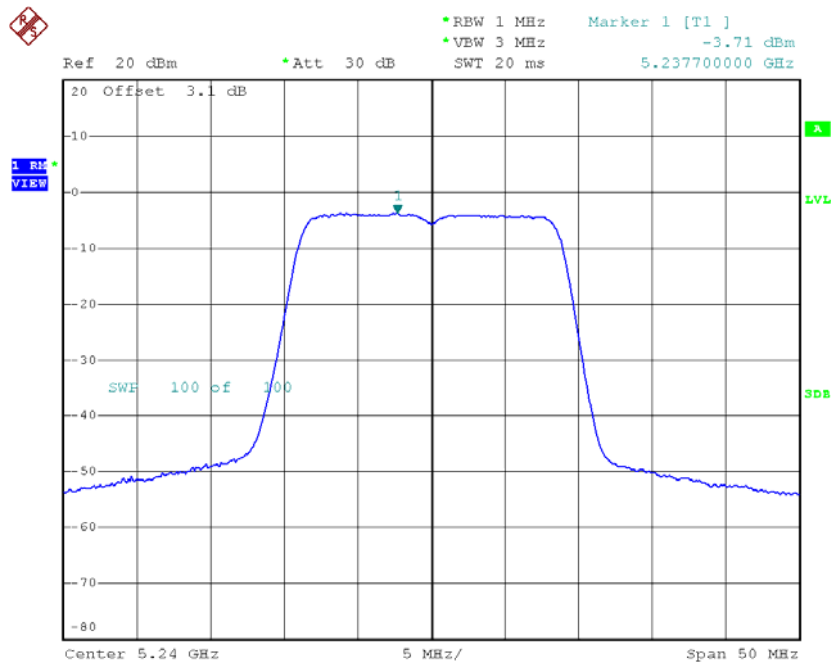

Date: 23.MAR.2016 13:21:20


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	2.01	17.00
CH40	5200	2.29	17.00
CH48	5240	1.97	17.00

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-3.26	1.11	-2.15	17.00
CH46	5230	-3.03	1.11	-1.92	17.00

CH38

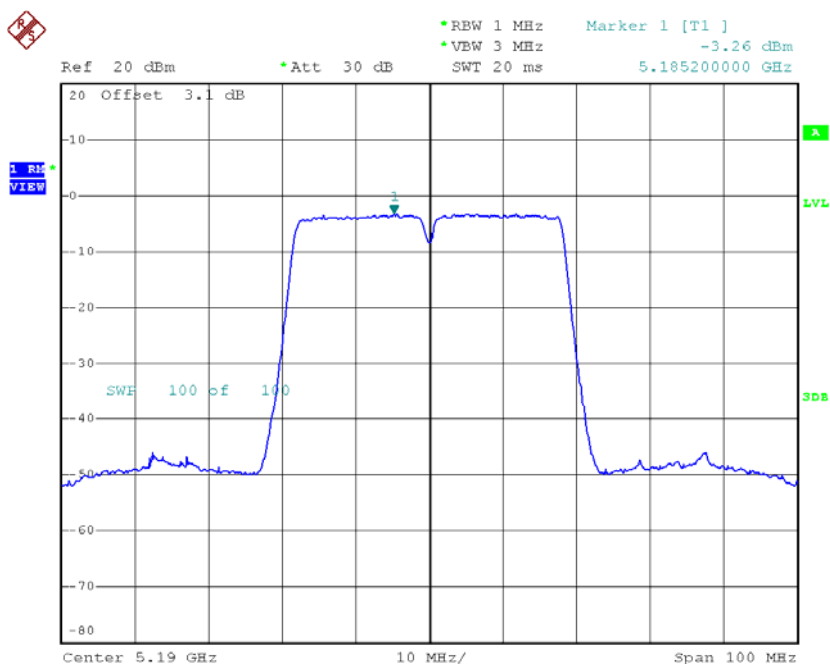

Date: 23.MAR.2016 11:16:01

CH46

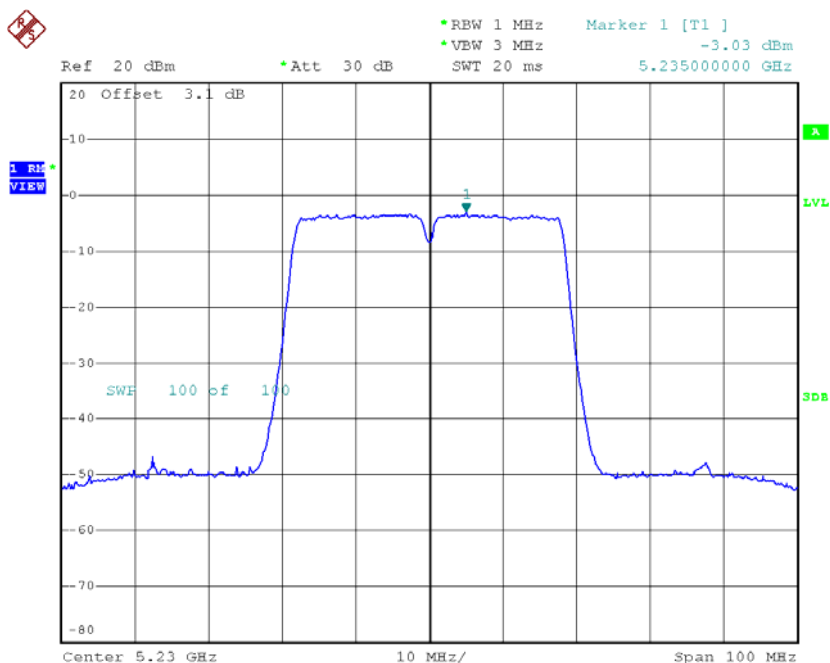


Date: 23.MAR.2016 11:17:36

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-8.44	1.11	-7.33	17.00
CH46	5230	-8.11	1.11	-7.00	17.00

CH38

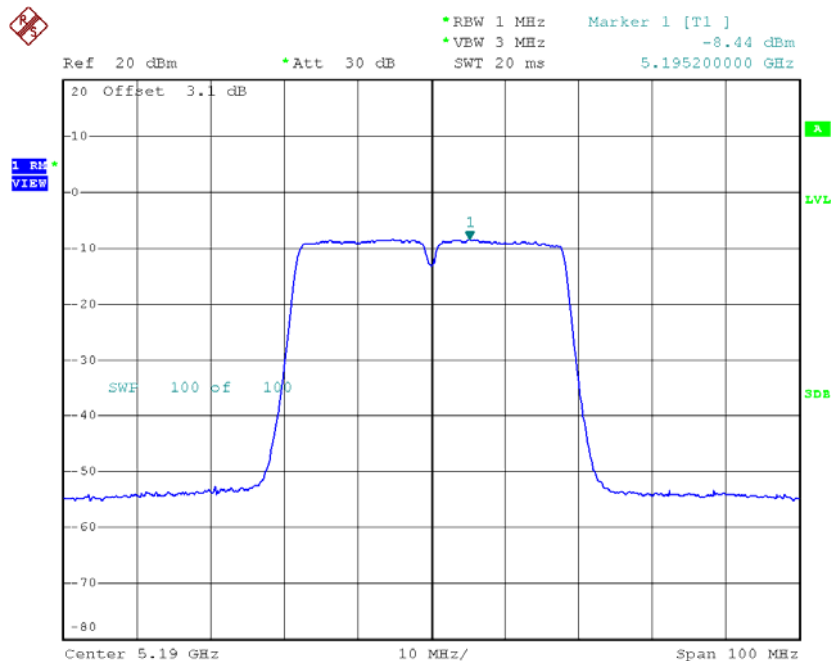

Date: 23.MAR.2016 13:26:23

CH46

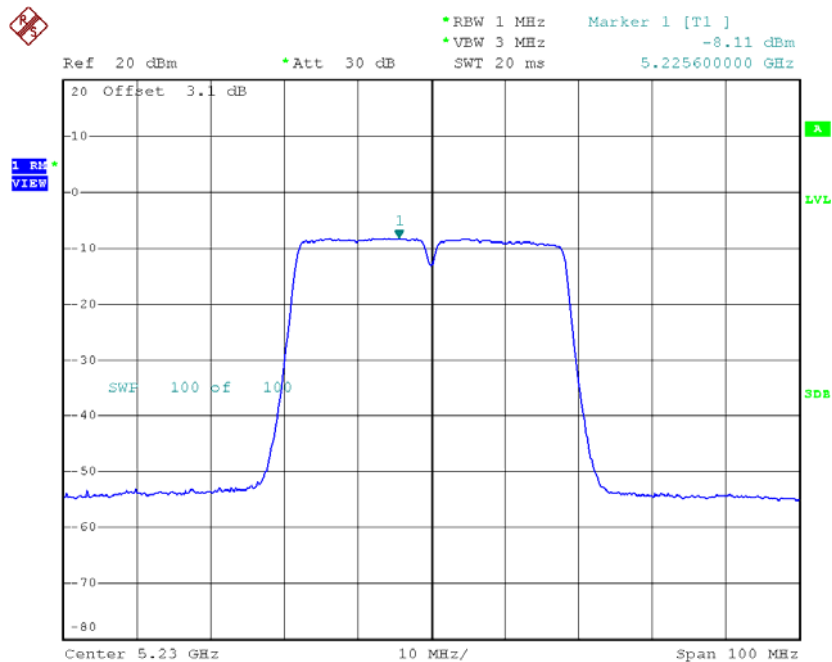


Date: 23.MAR.2016 13:27:59

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-1.00	17.00
CH46	5230	-0.75	17.00


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.65	0.26	0.91	11.00
CH60	5300	0.63	0.26	0.89	11.00
CH64	5320	-0.01	0.26	0.25	11.00

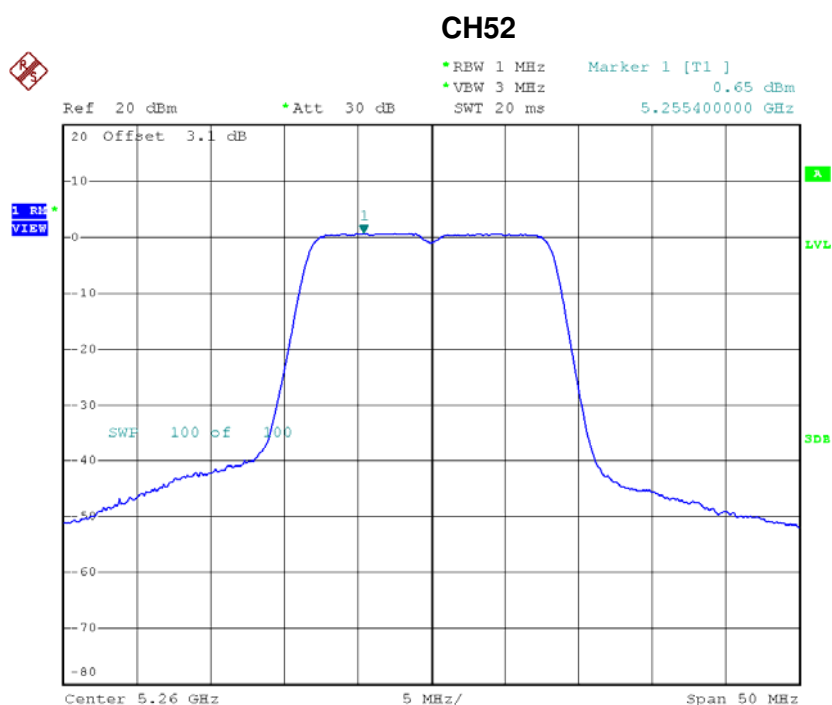


Date: 23.MAR.2016 09:15:54

CH60

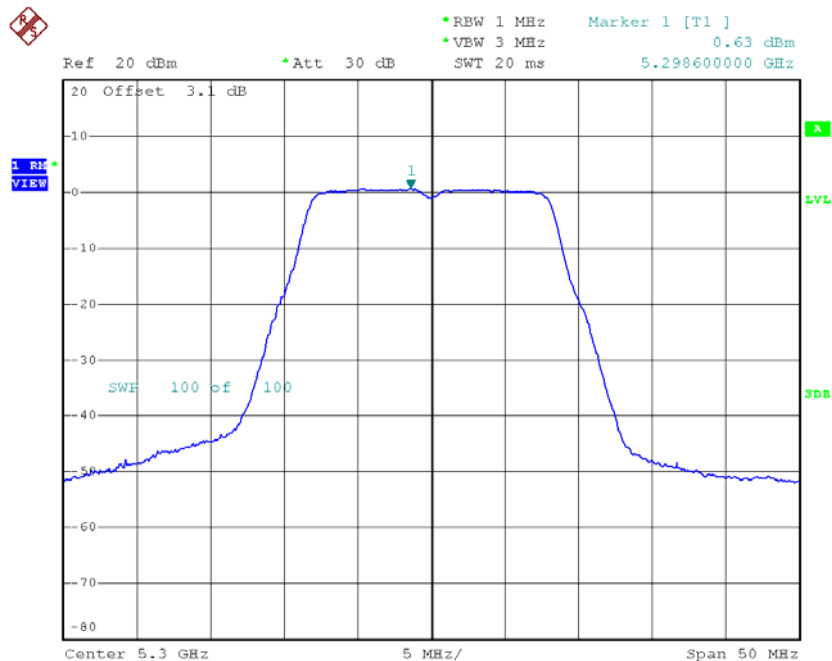

Date: 23.MAR.2016 09:20:42


CH64

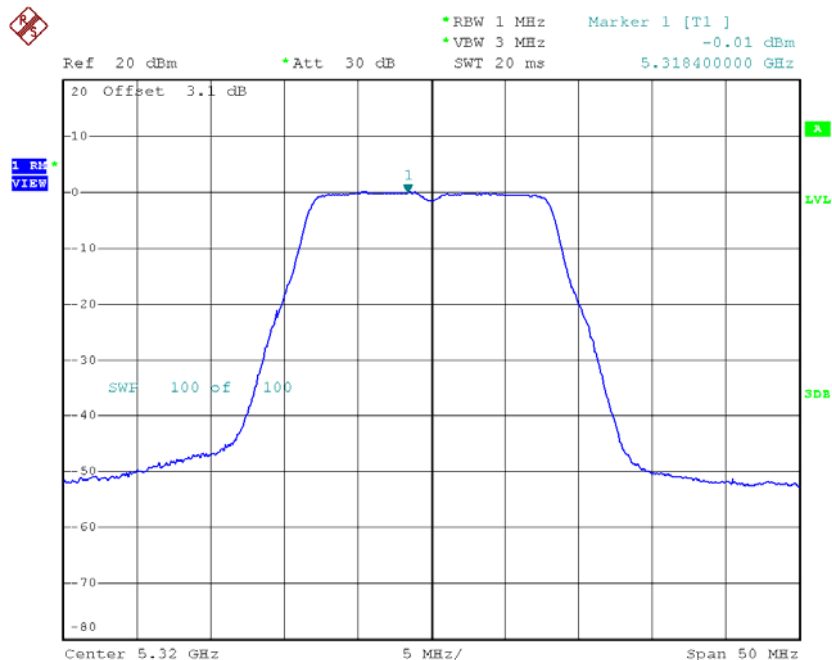

Date: 23.MAR.2016 09:21:57


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-3.51	0.48	-3.03	11.00
CH60	5300	-3.76	0.48	-3.28	11.00
CH64	5320	-3.38	0.48	-2.90	11.00

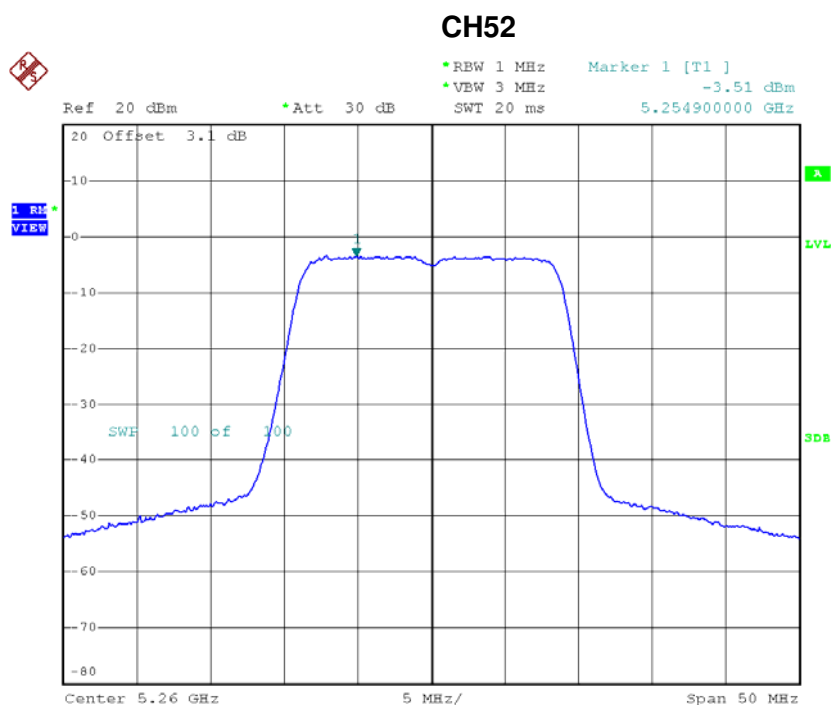


Date: 23.MAR.2016 09:48:49

CH60

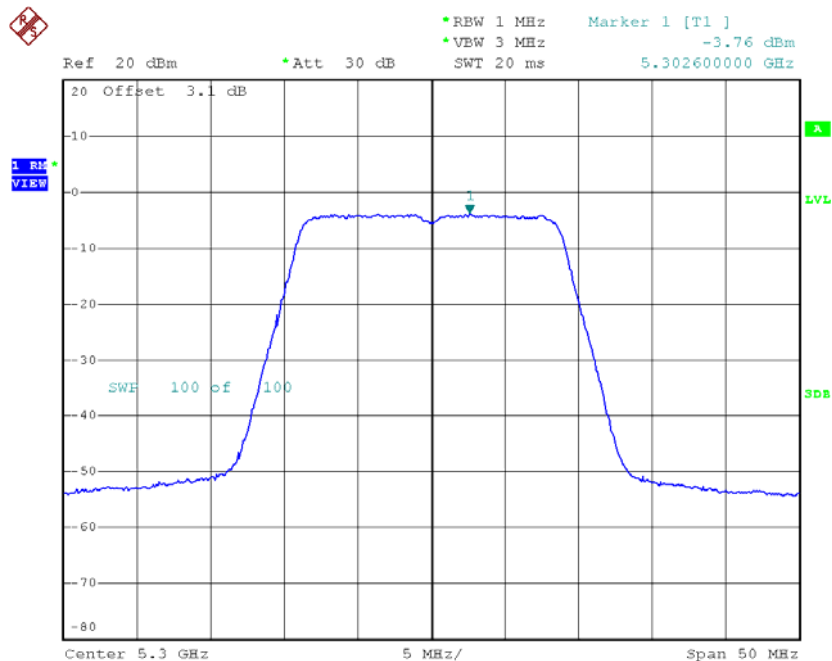

Date: 23.MAR.2016 09:50:18

CH64

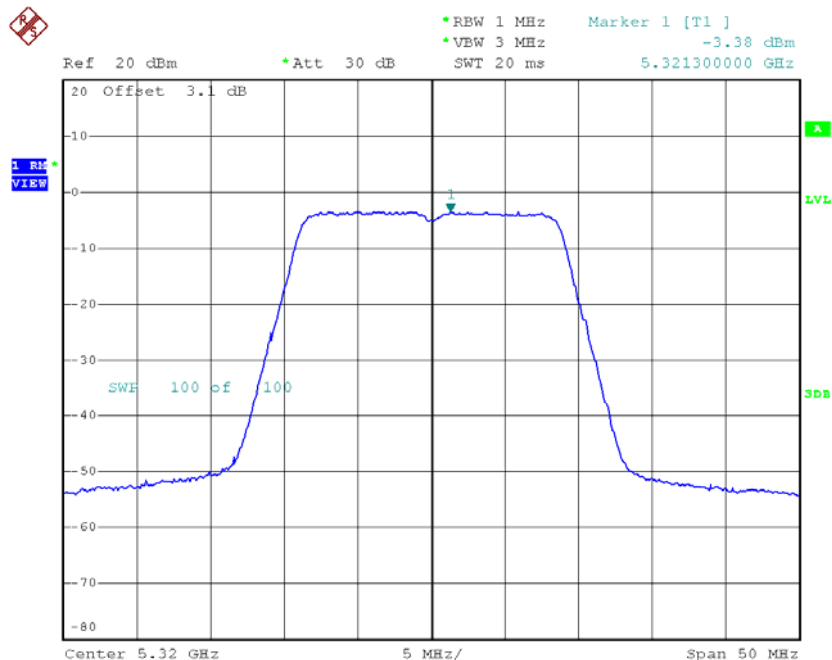


Date: 23.MAR.2016 09:51:37

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.92	0.48	-2.44	11.00
CH60	5300	-3.17	0.48	-2.69	11.00
CH64	5320	-3.11	0.48	-2.63	11.00

CH52

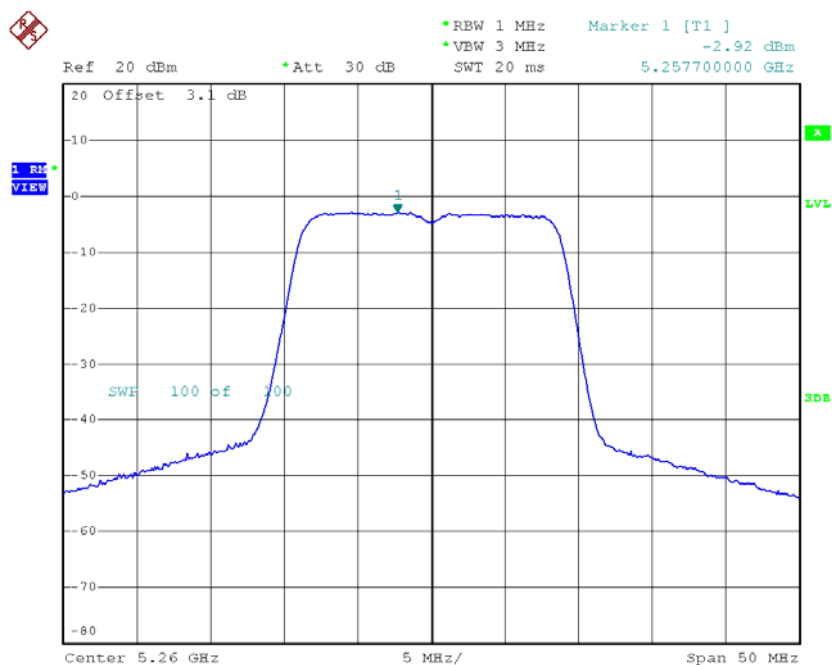


Date: 23.MAR.2016 13:36:12

CH60

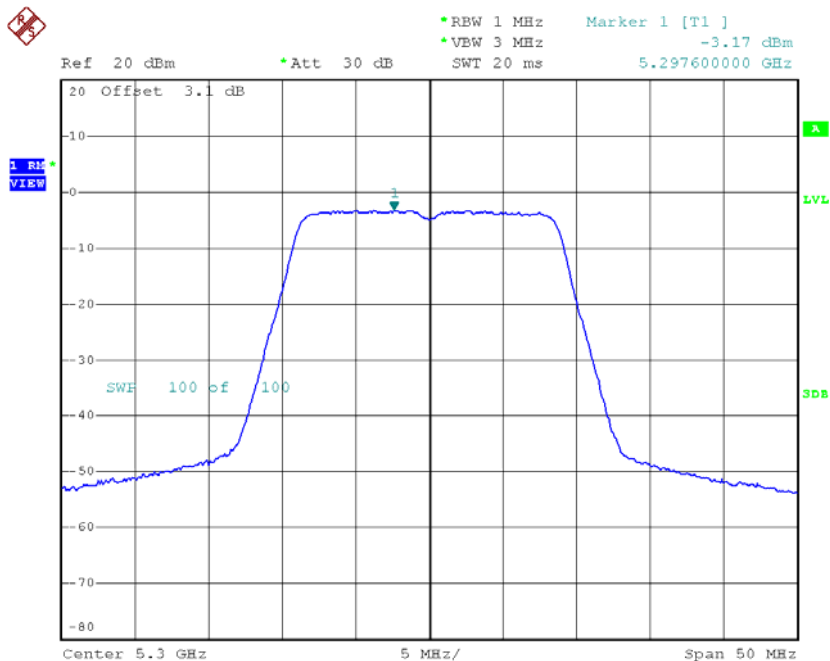

Date: 23.MAR.2016 13:37:55

CH64

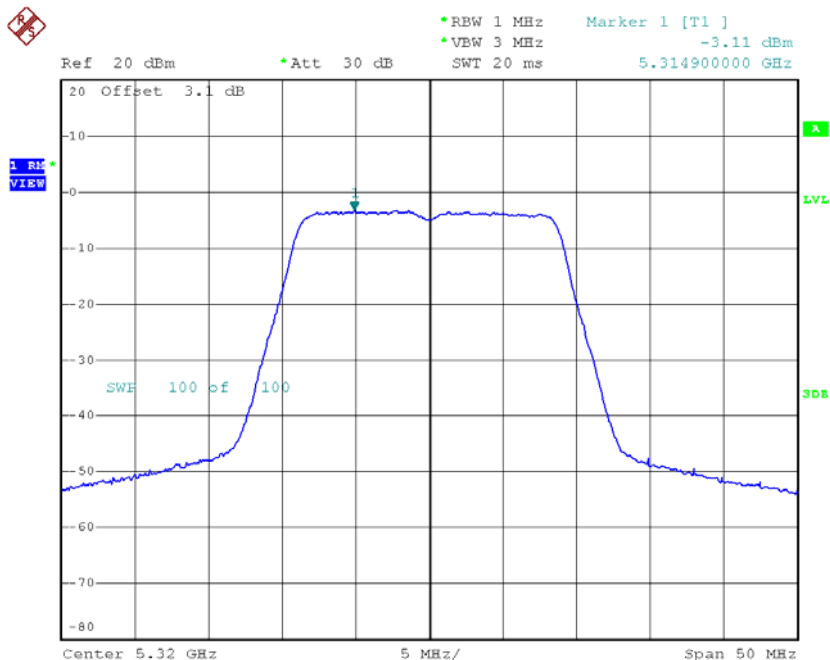

Date: 23.MAR.2016 13:40:05


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.29	11.00
CH60	5300	0.04	11.00
CH64	5320	0.25	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-6.08	1.11	-4.97	11.00
CH62	5310	-6.74	1.11	-5.63	11.00

CH54

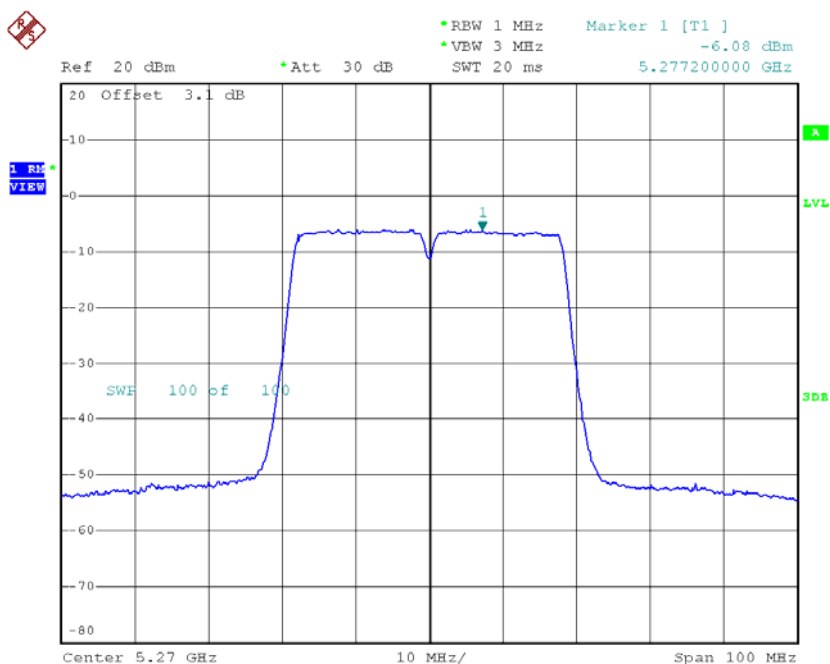

Date: 23.MAR.2016 10:30:58

CH62

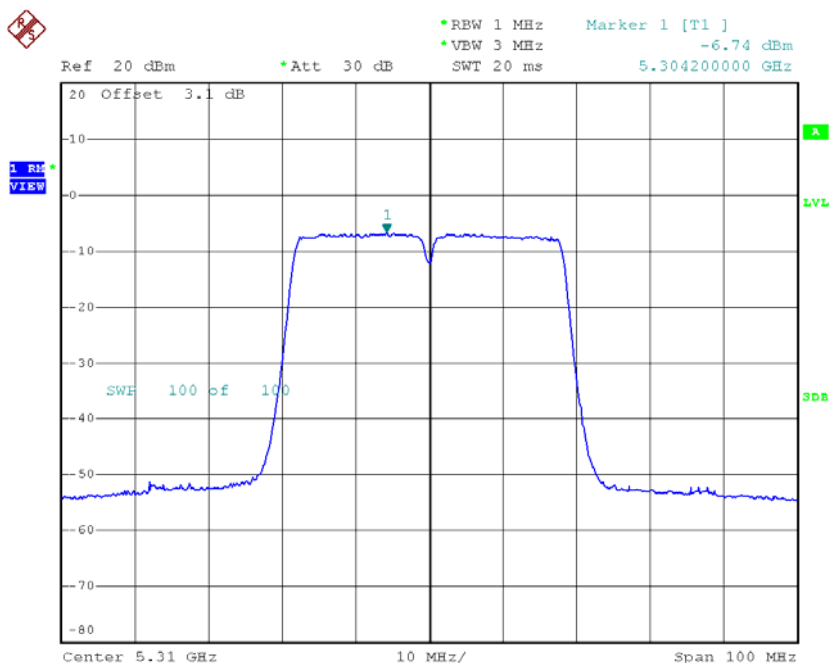


Date: 23.MAR.2016 10:32:48

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-6.18	1.11	-5.07	11.00
CH62	5310	-6.86	1.11	-5.75	11.00

CH54

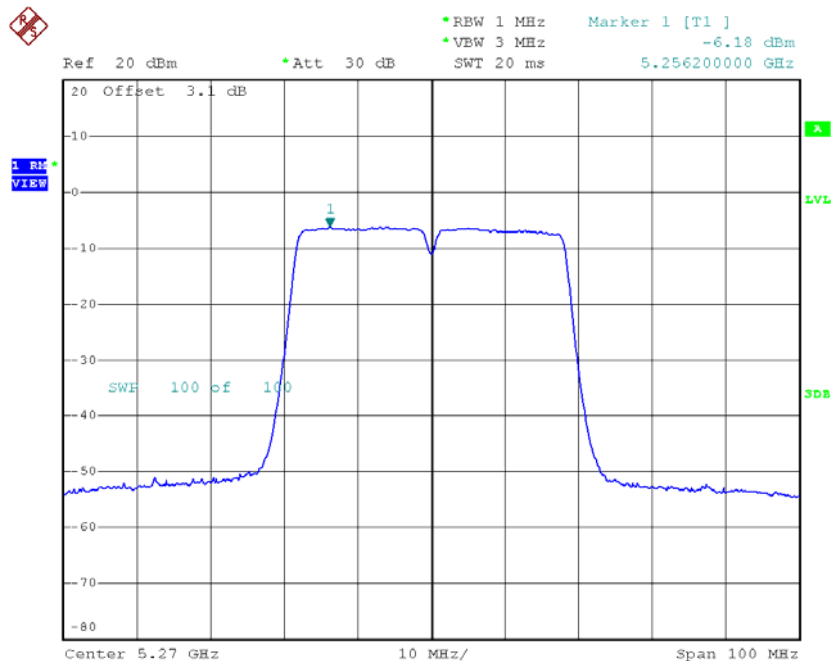

Date: 23.MAR.2016 14:07:24

CH62

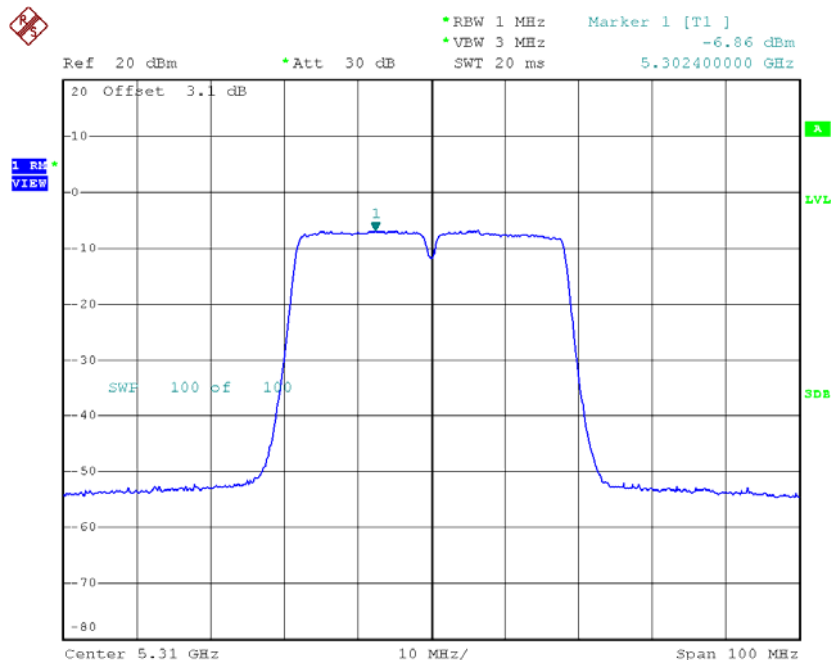


Date: 23.MAR.2016 14:08:31

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-2.01	11.00
CH62	5310	-2.68	11.00


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.59	0.26	-0.33	11.00
CH116	5580	-0.09	0.26	0.17	11.00
CH140	5700	0.64	0.26	0.90	11.00

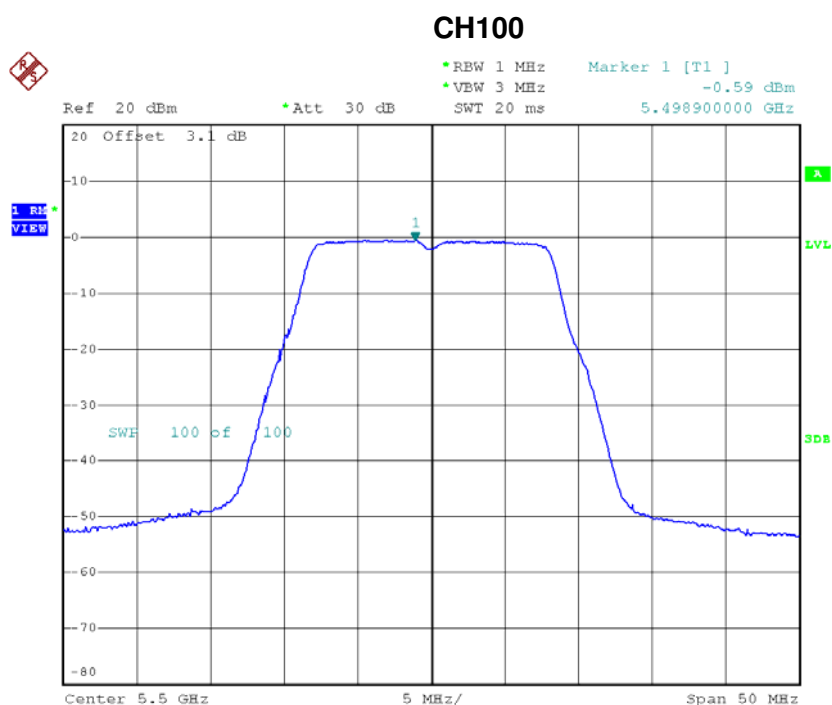


Date: 23.MAR.2016 09:23:28

CH116

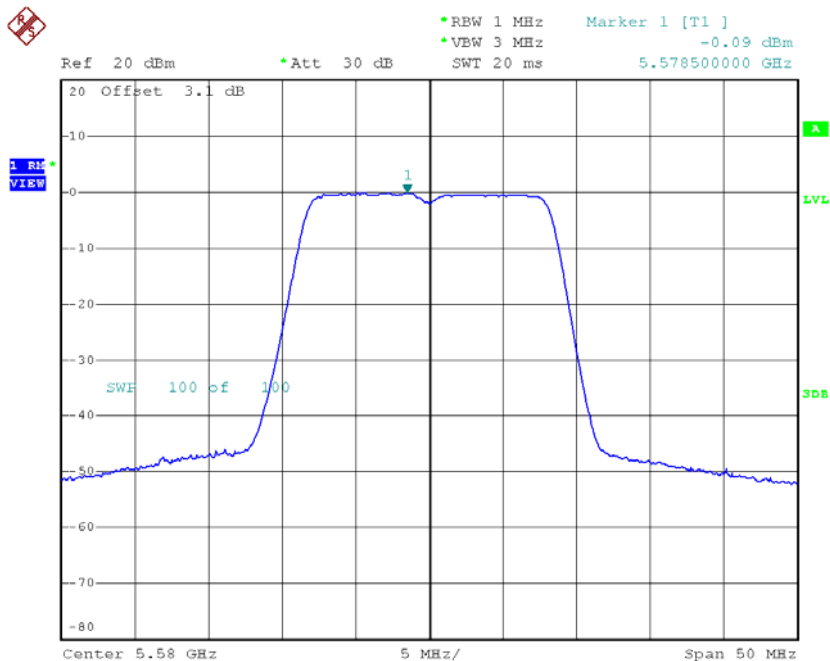

Date: 23.MAR.2016 09:30:08

CH140

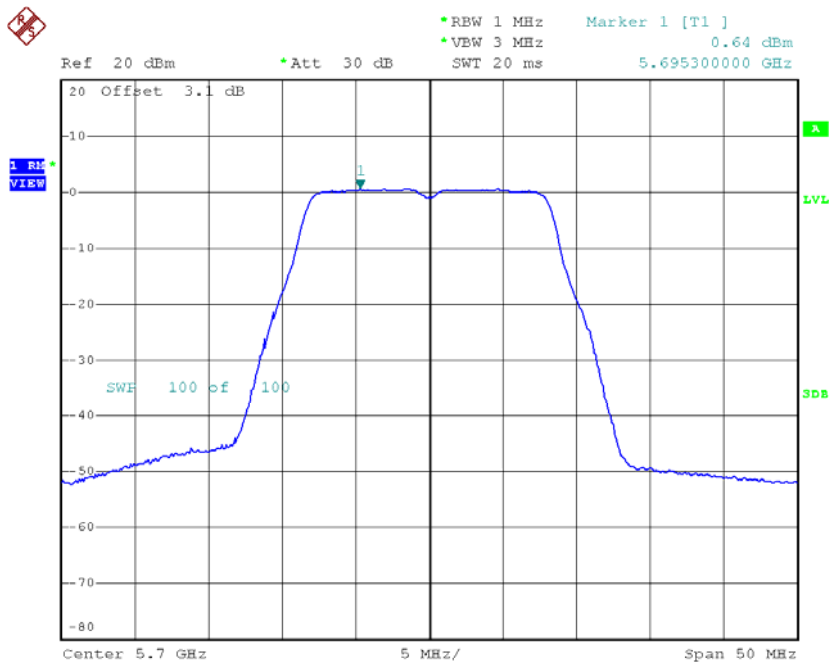


Date: 23.MAR.2016 09:31:31

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-3.55	0.48	-3.07	11.00
CH116	5580	-2.03	0.48	-1.55	11.00
CH140	5700	-2.66	0.48	-2.18	11.00

CH100

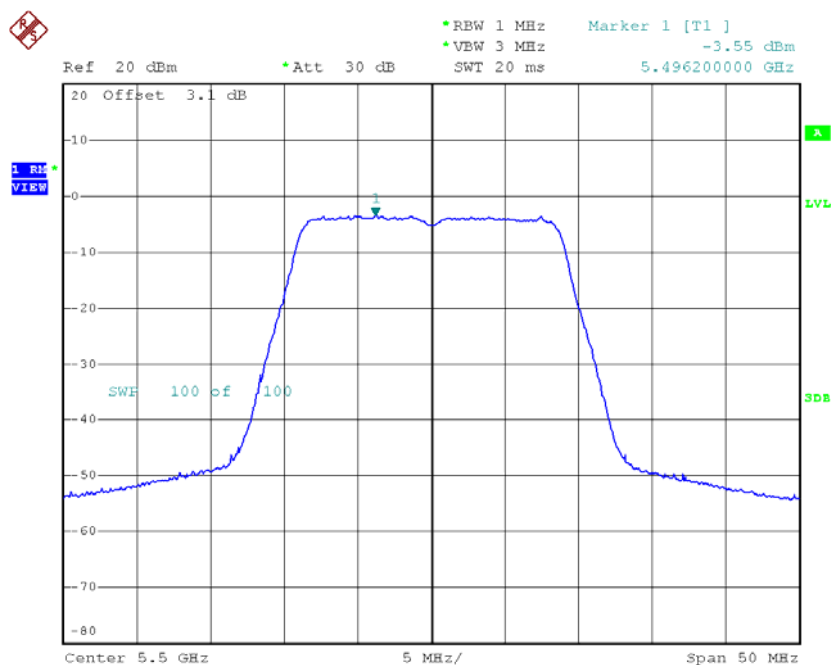

Date: 23.MAR.2016 09:53:02