








### 2.7 11G\_H@Ant 1


Pref:







P<sub>uw</sub>:

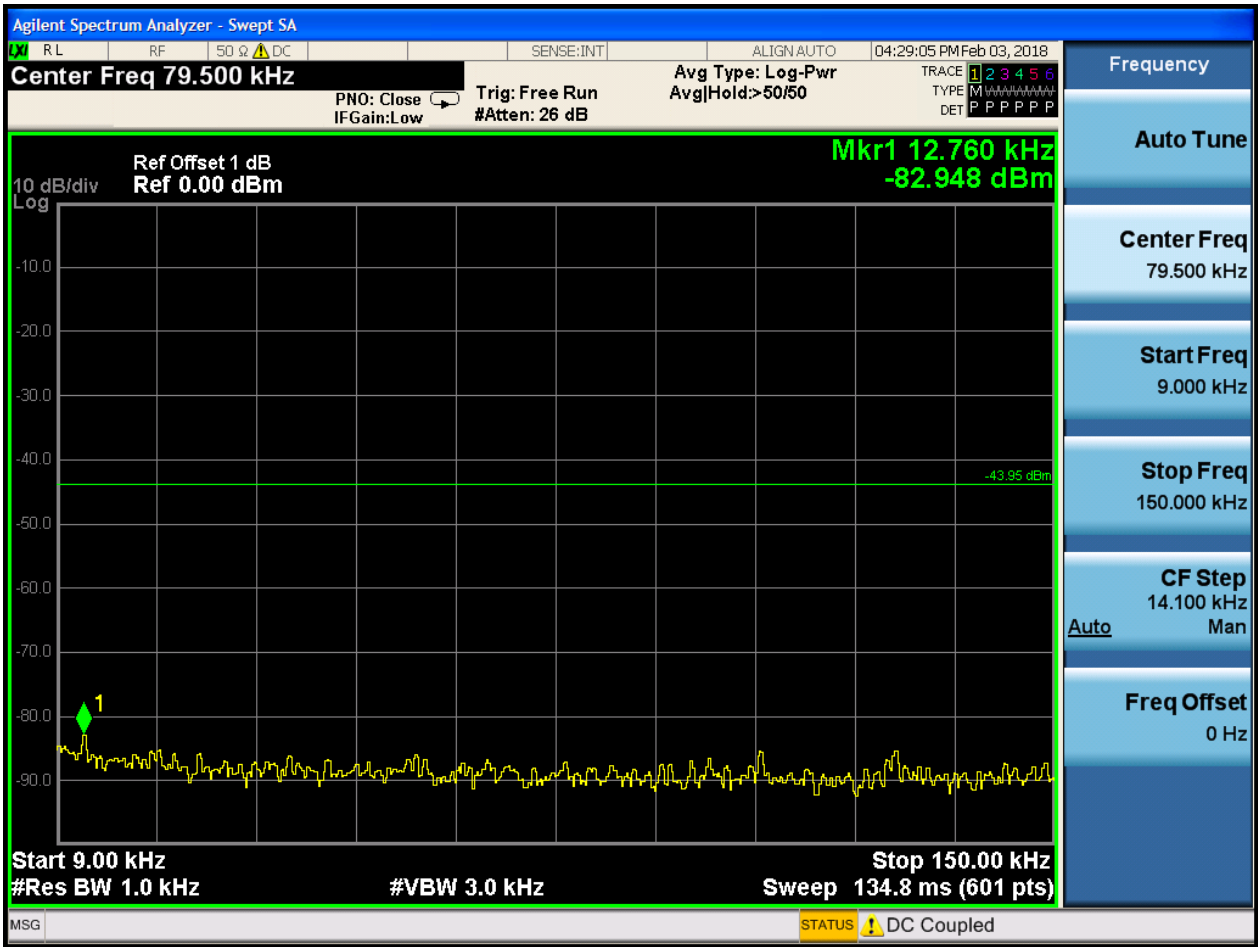


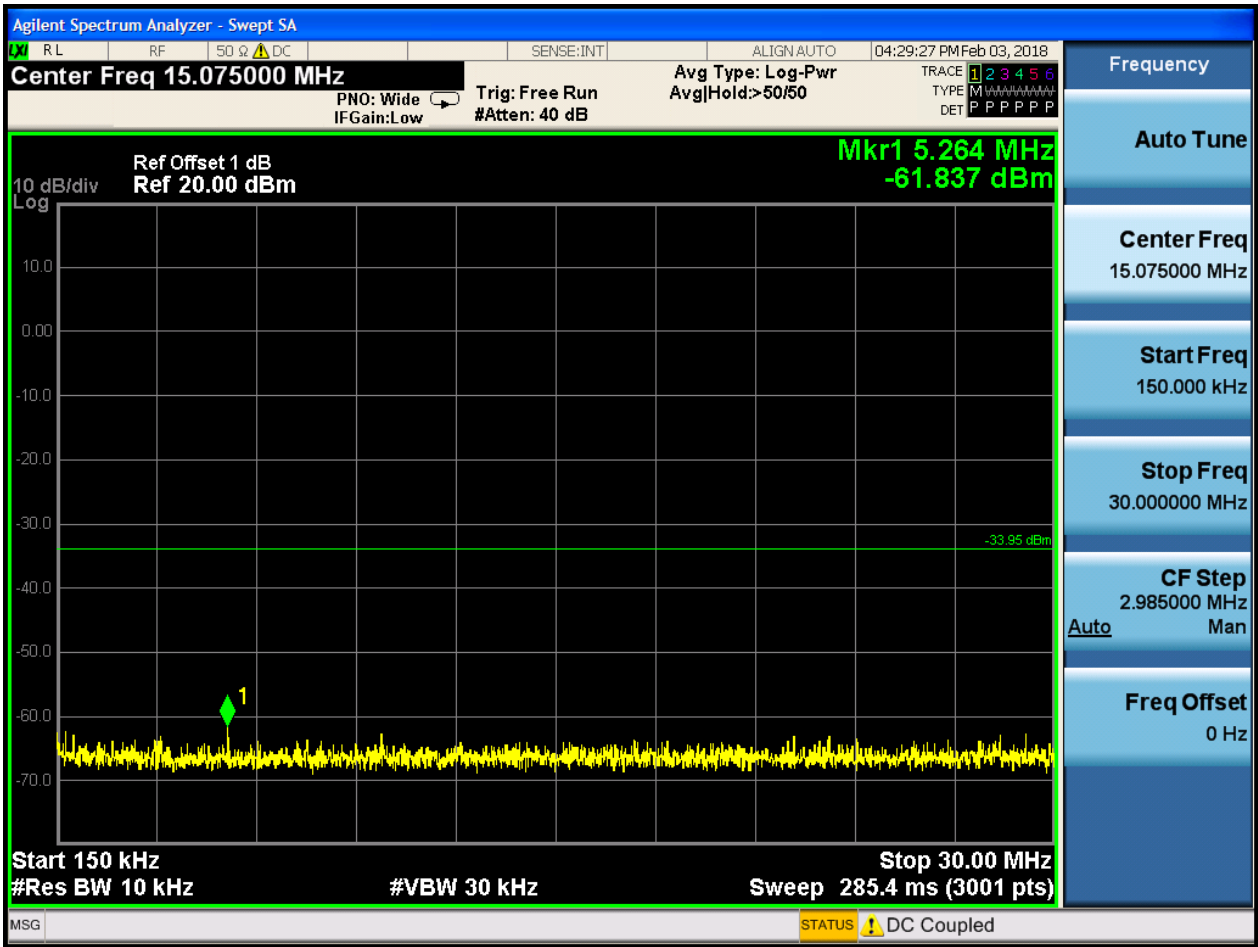

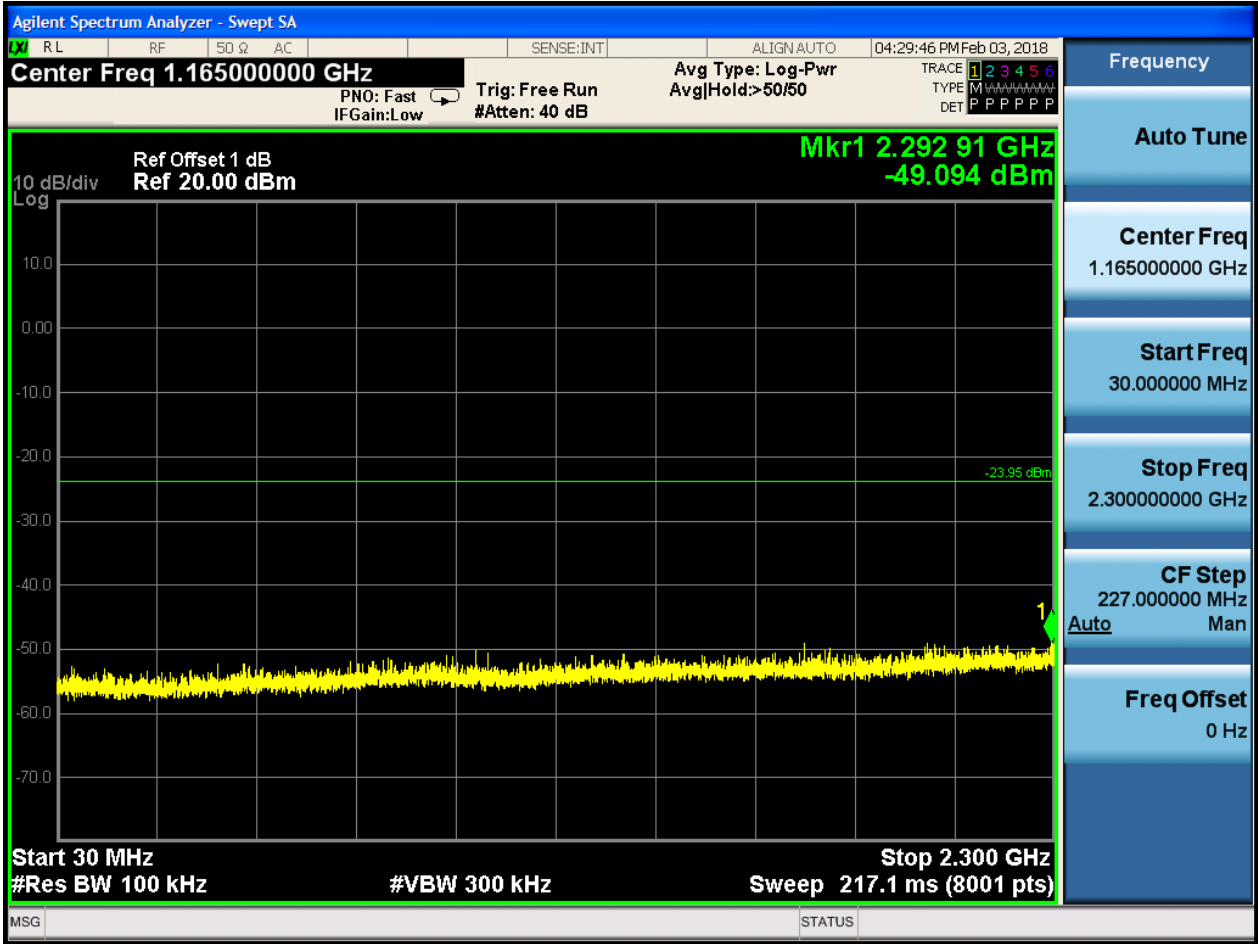



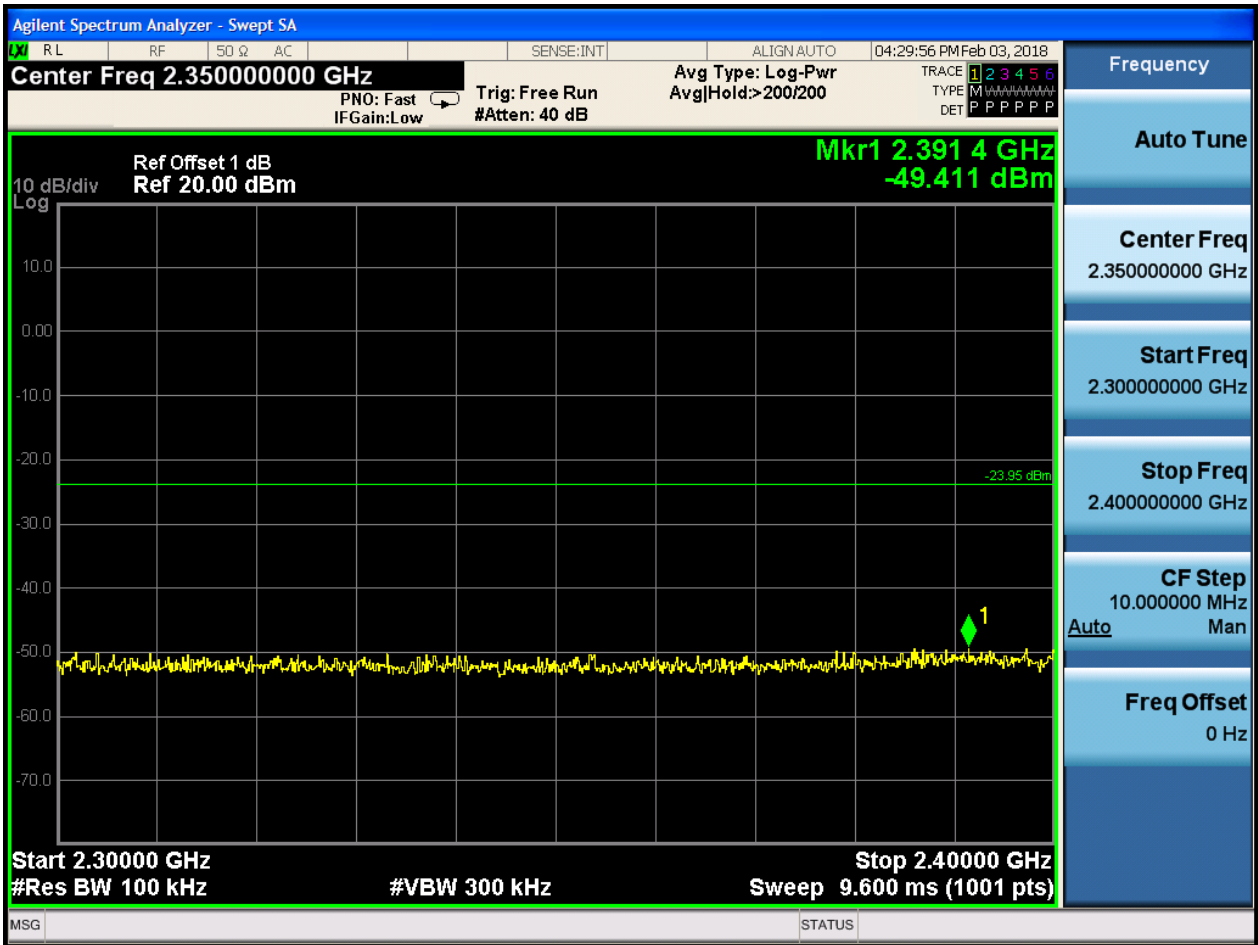


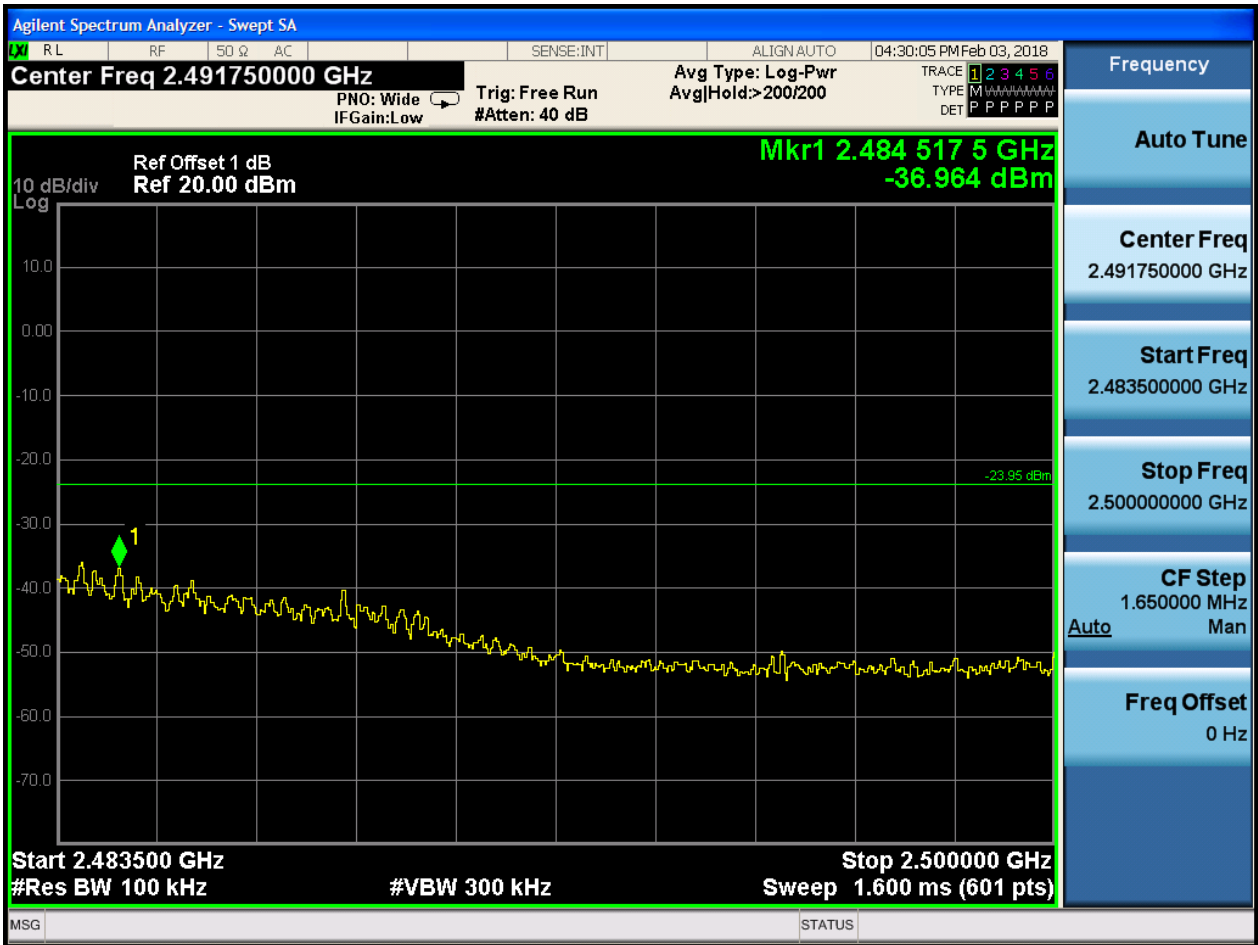




2.8 11N20\_L@Ant 1


Pref:

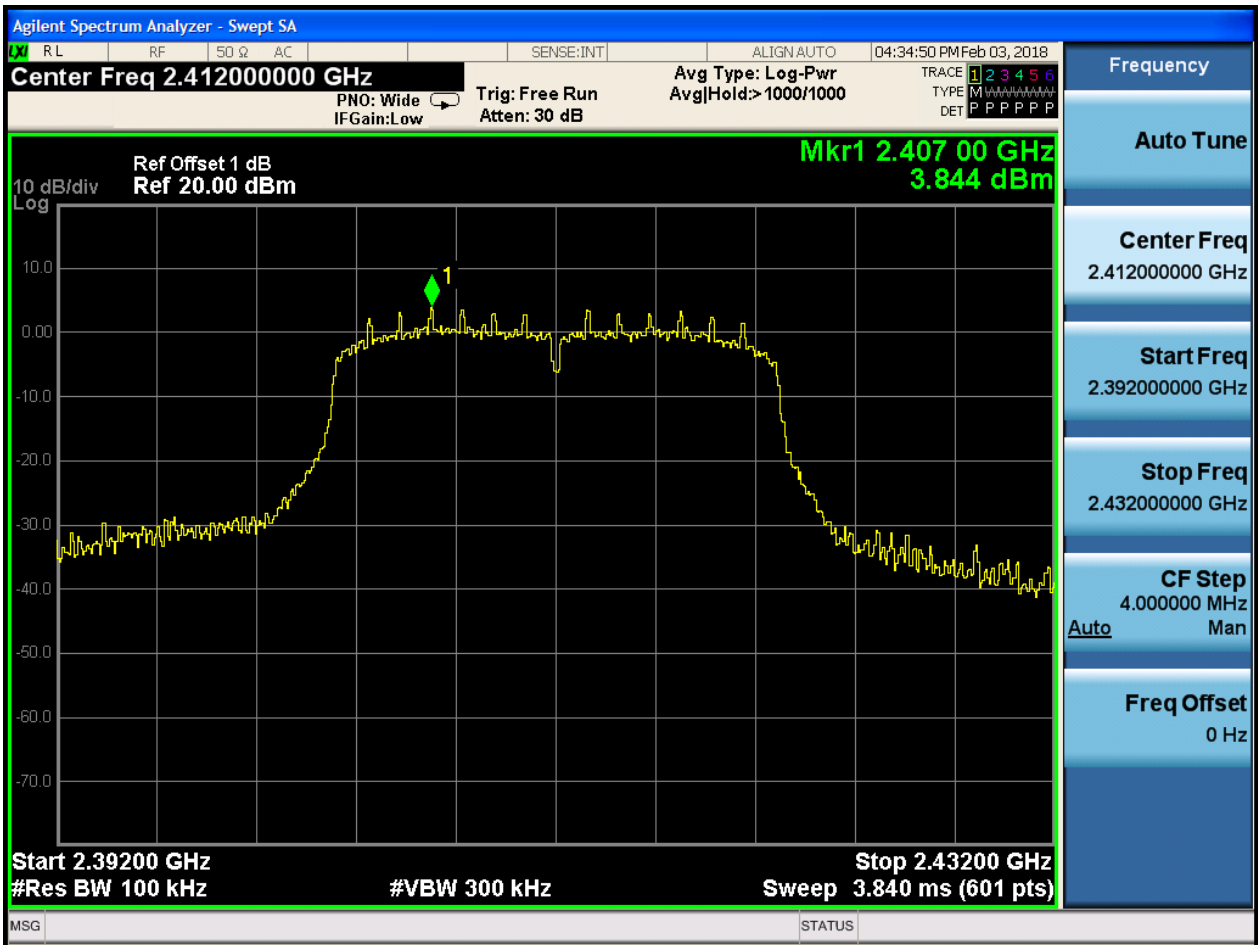




P<sub>uw</sub>:

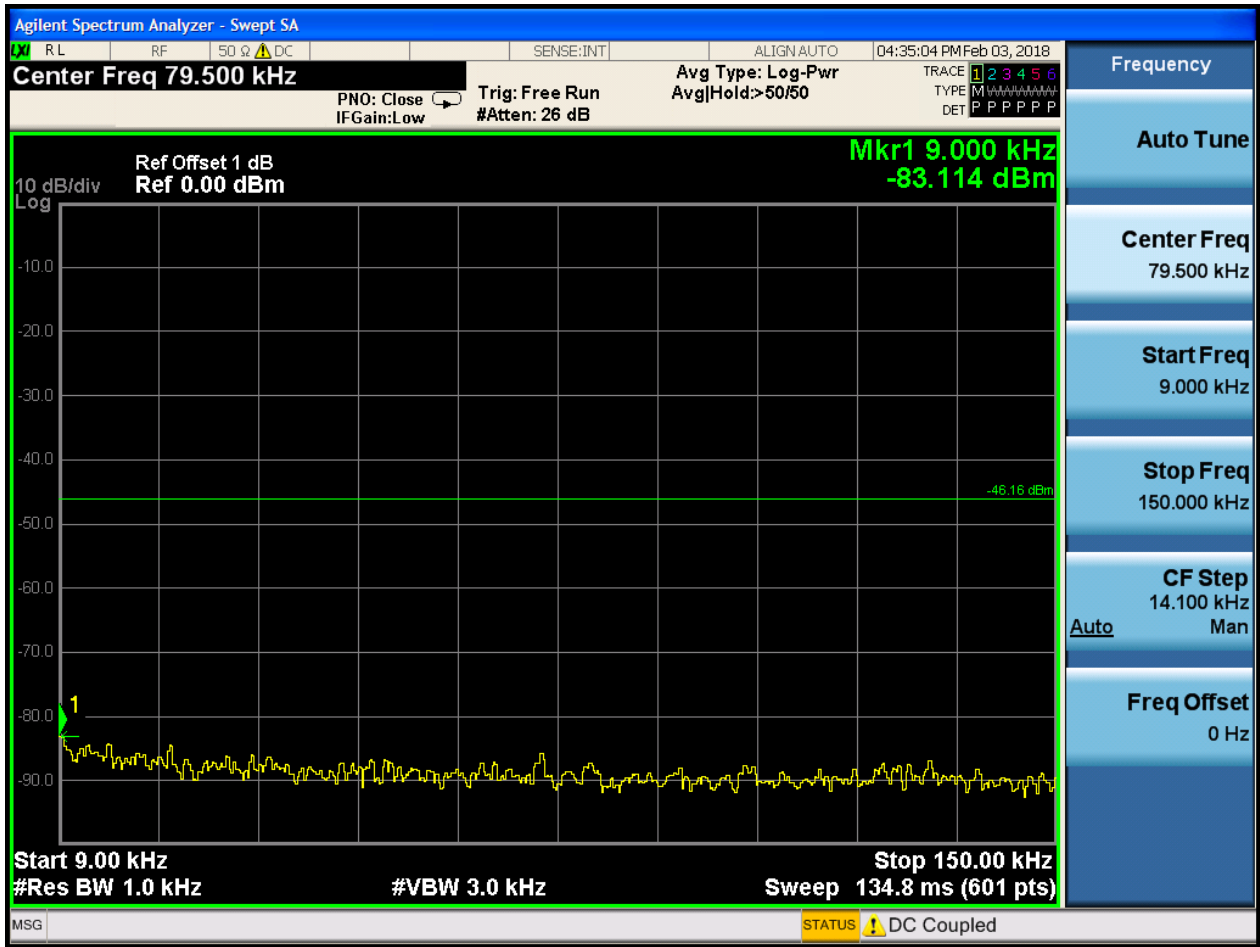


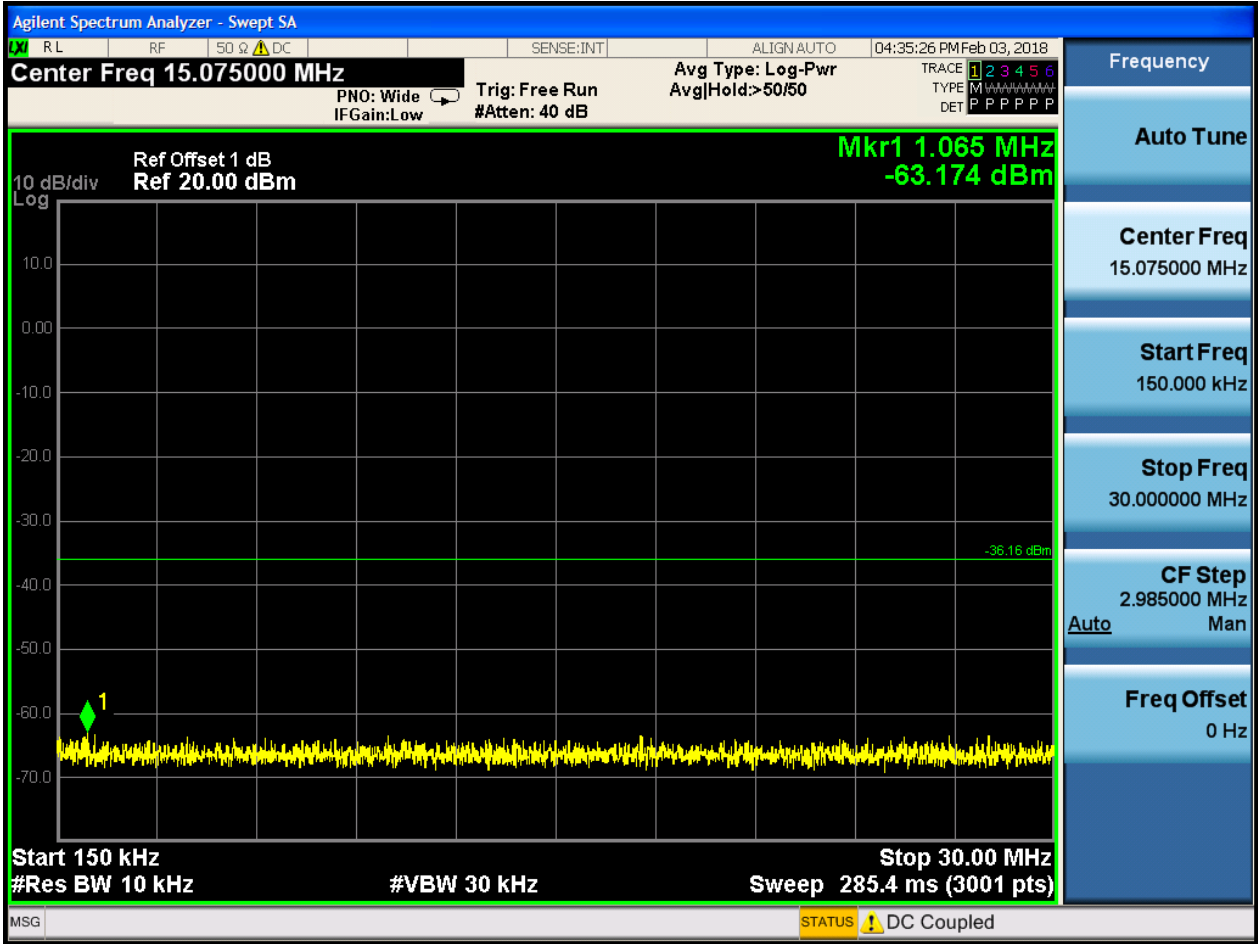

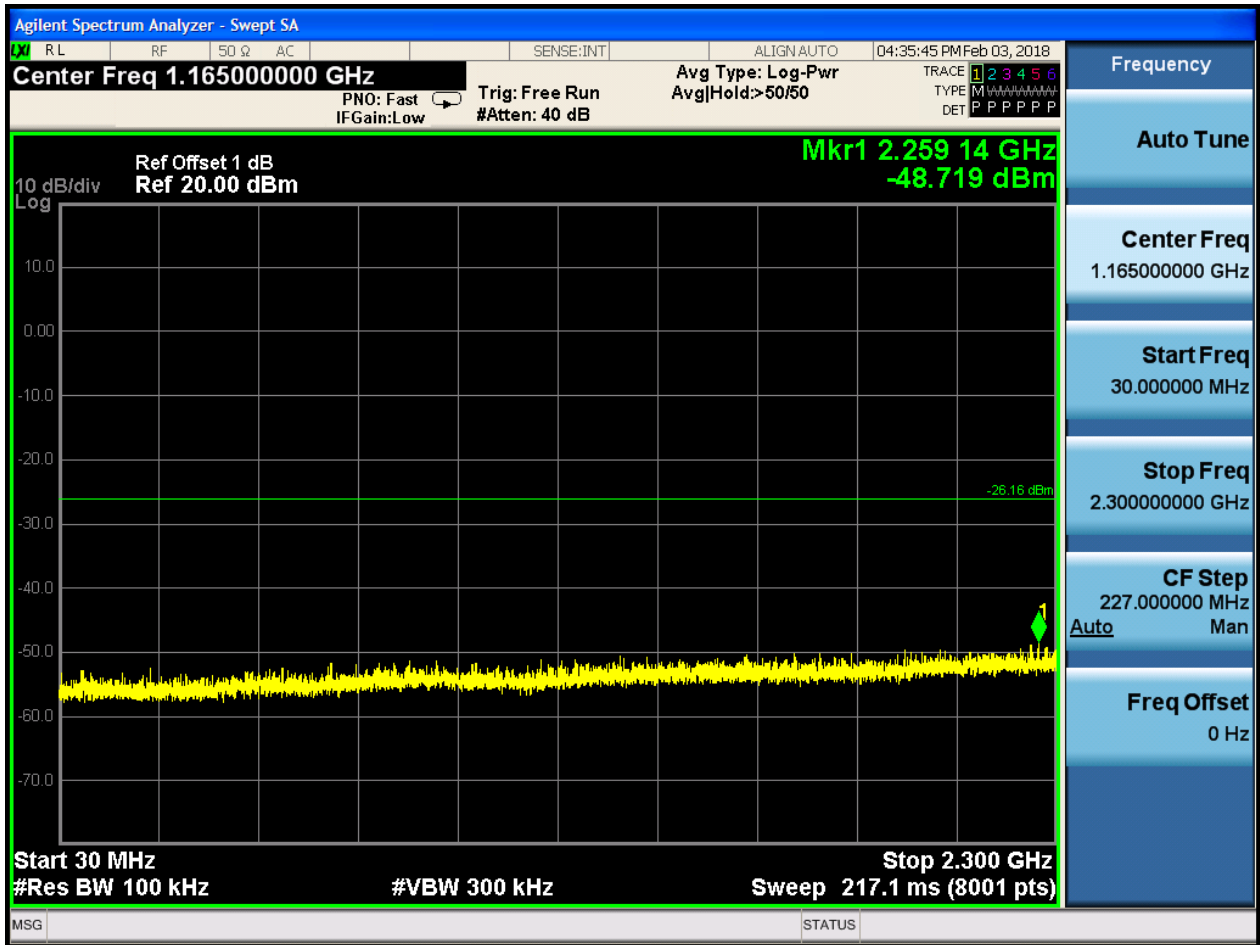





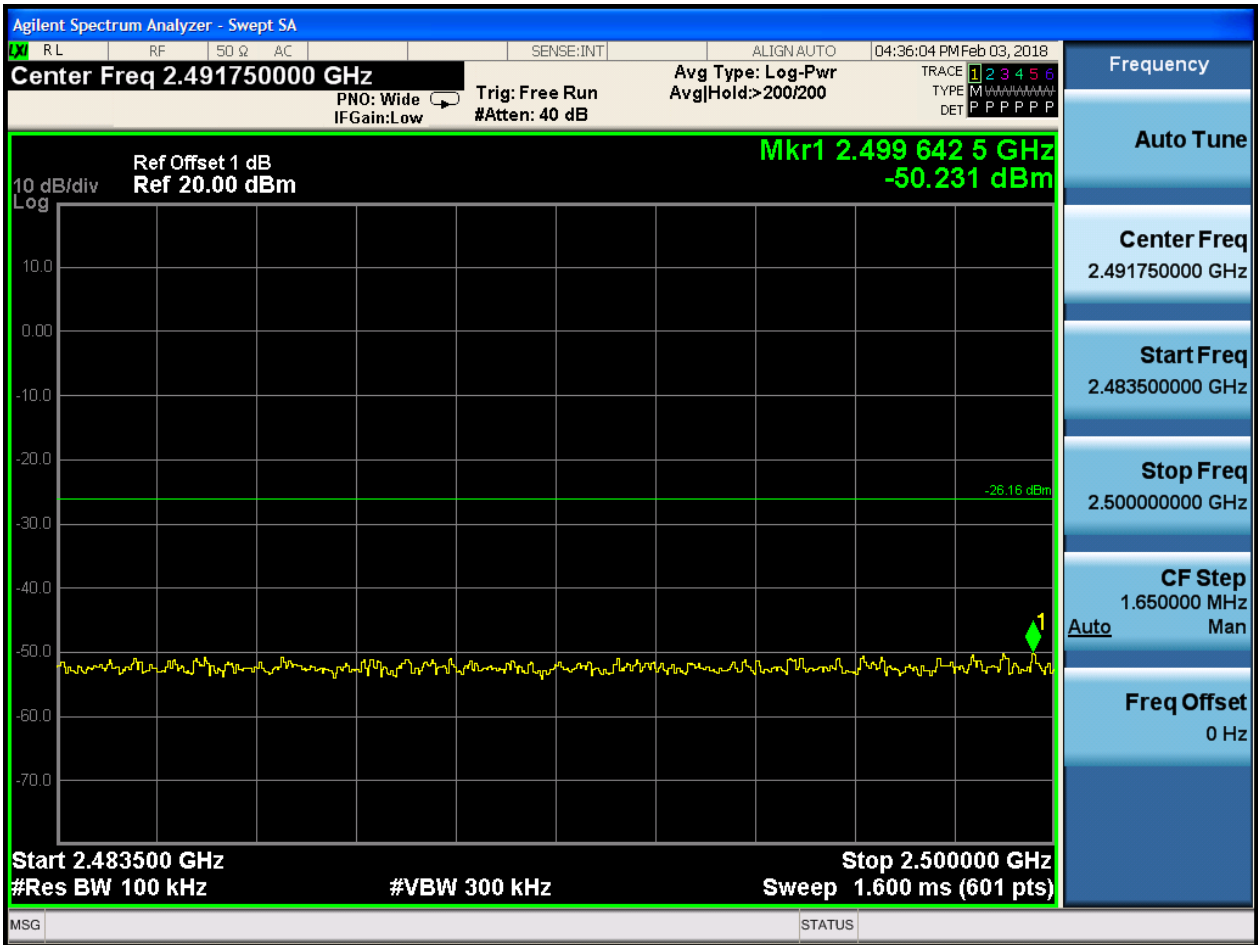






### 2.9 11N20\_M@Ant 1


Pref:








Puw:

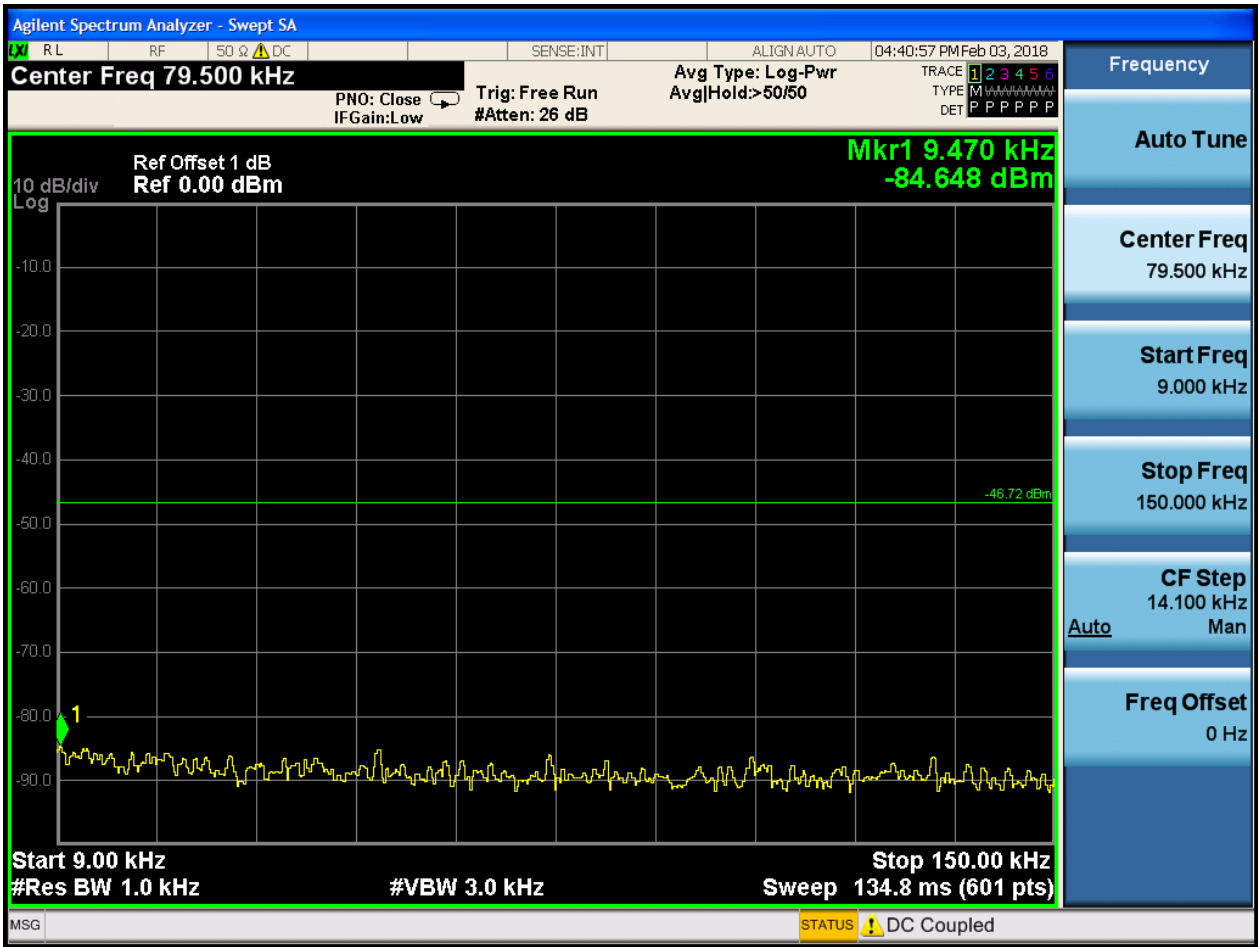

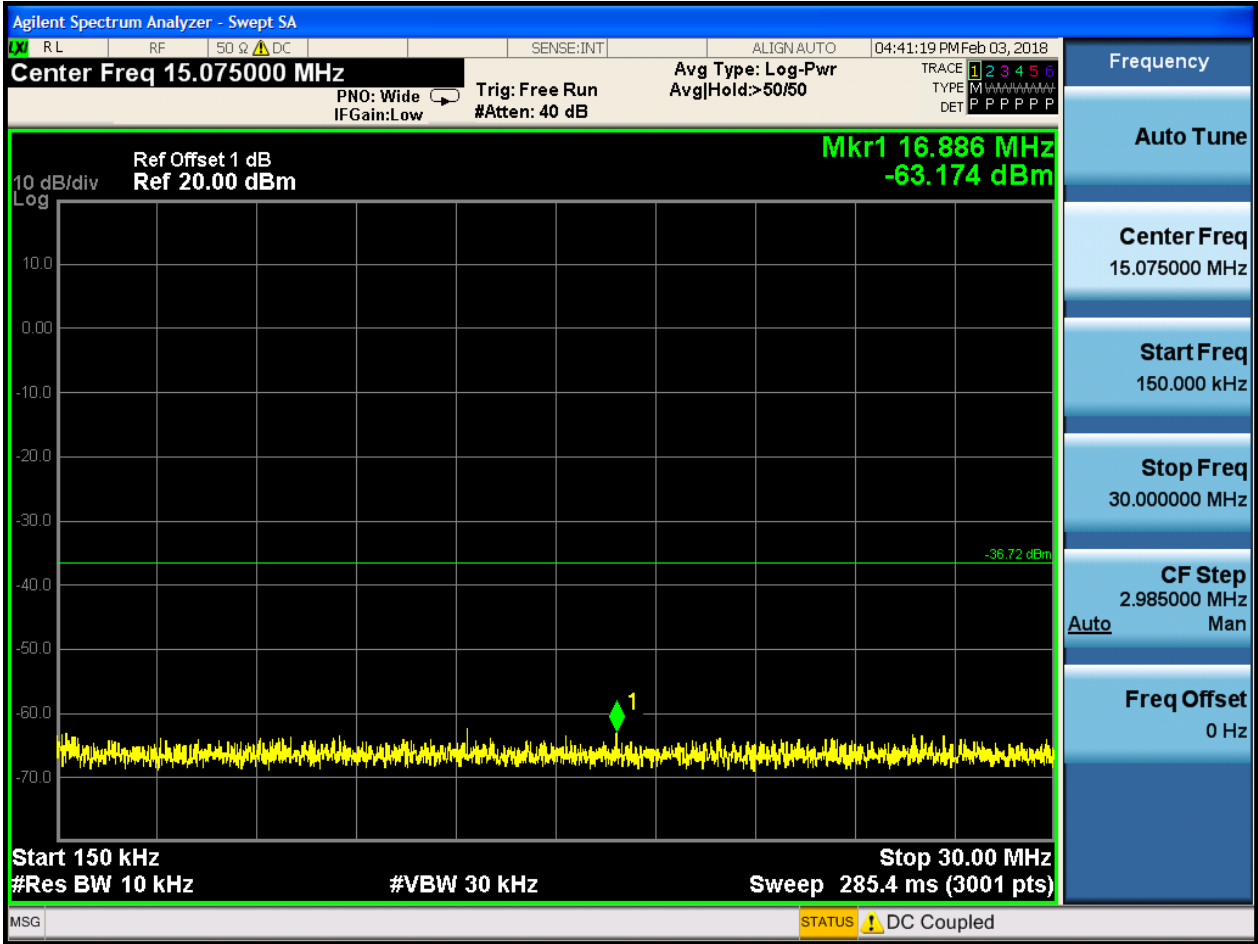

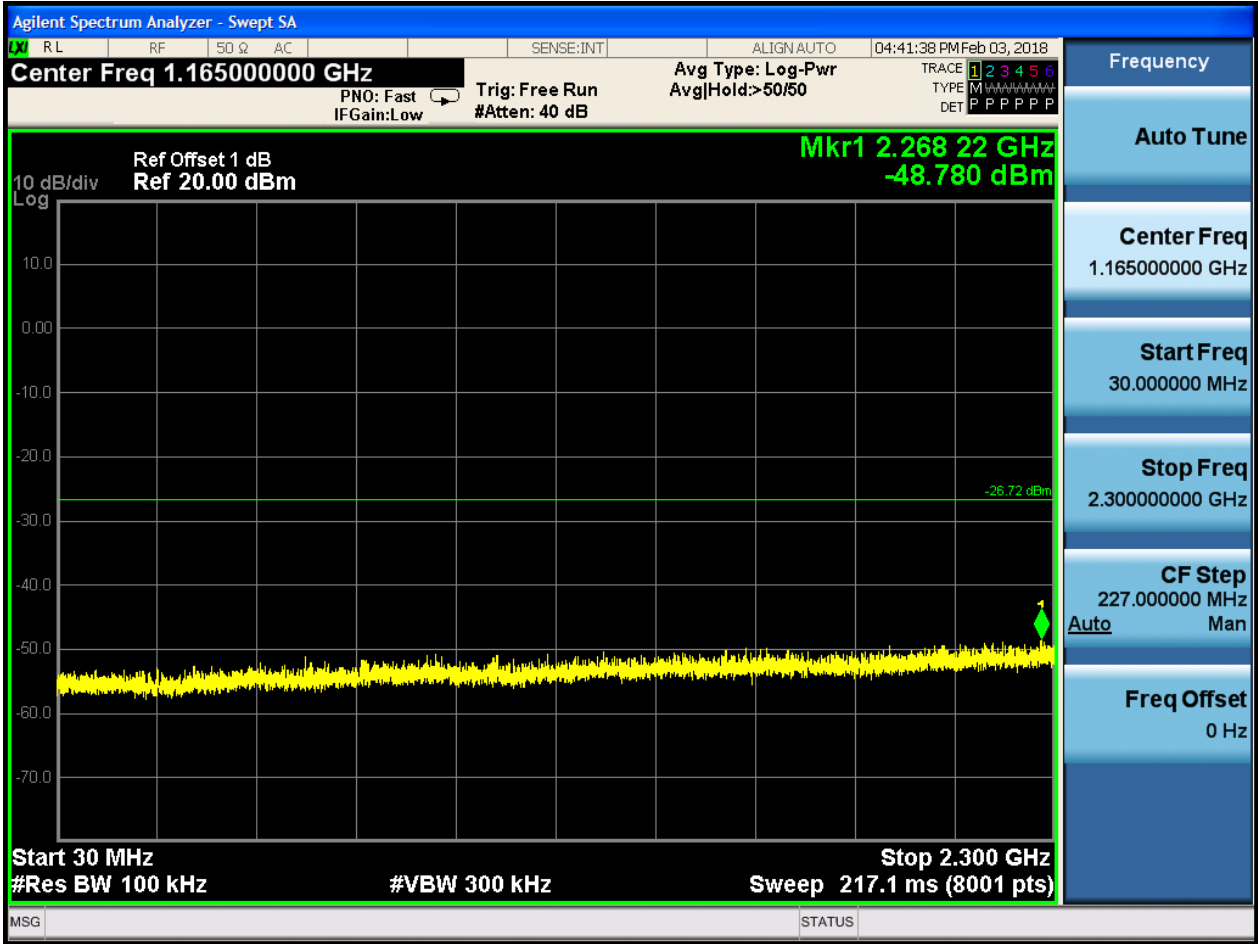

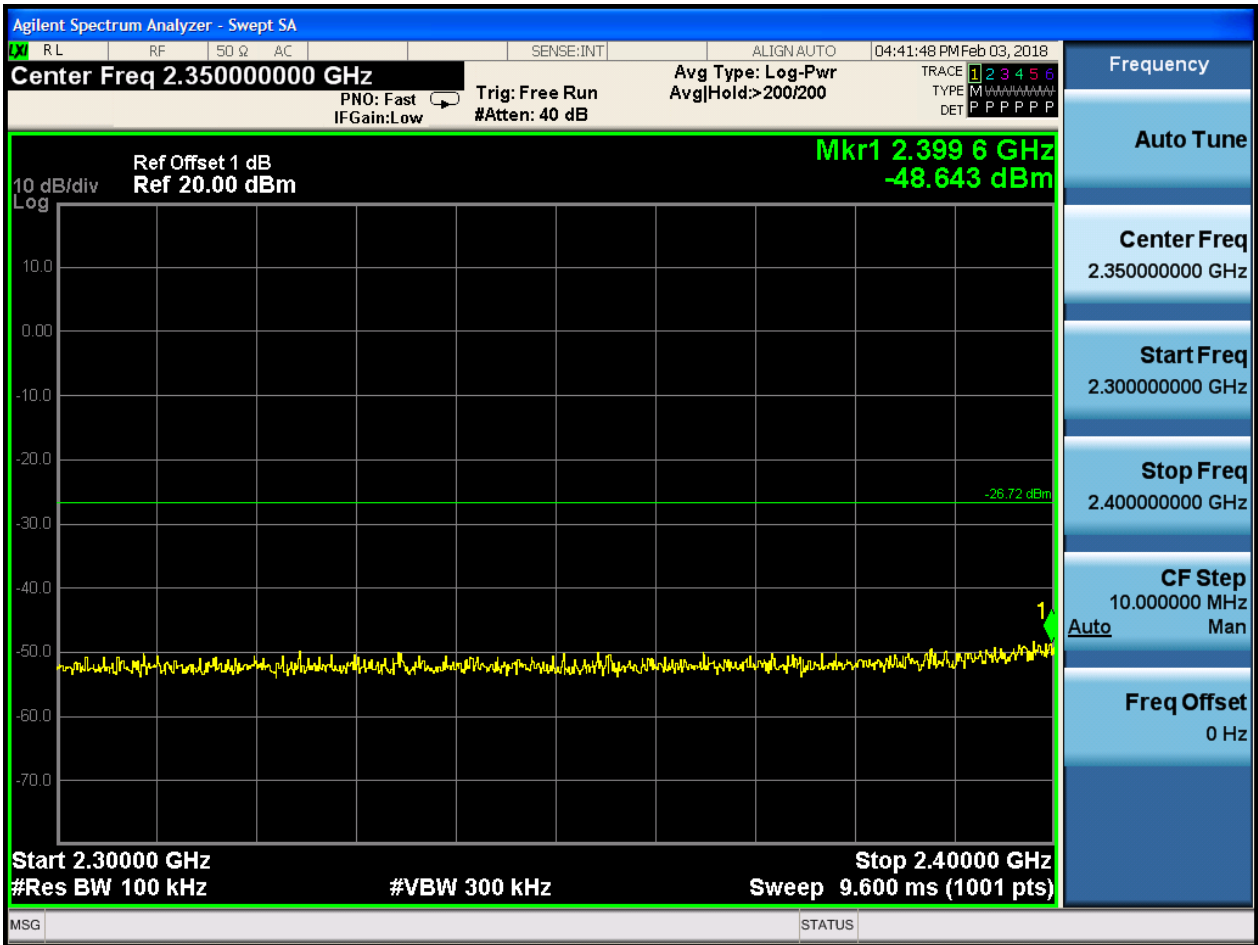

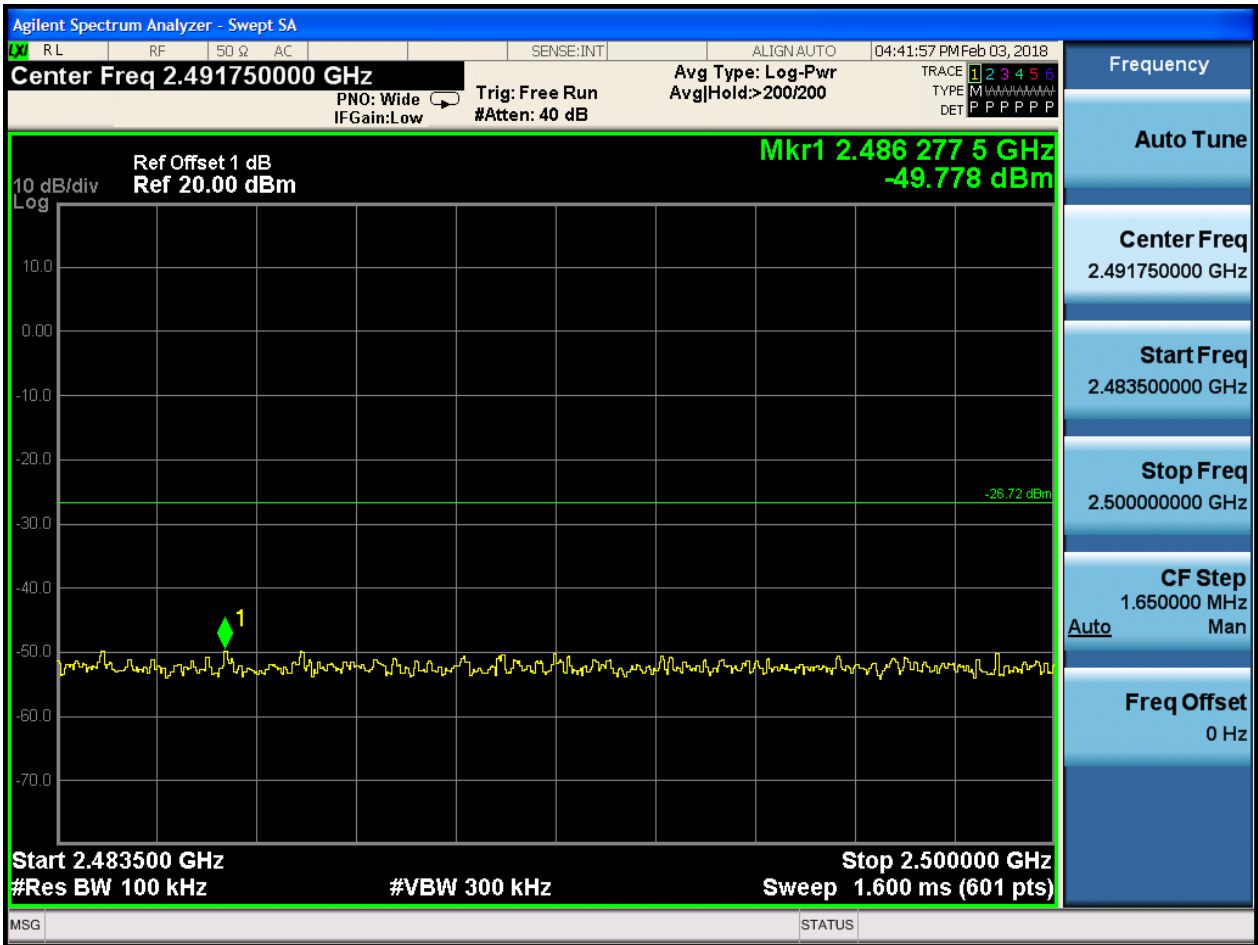








### 2.10 11N20\_H@Ant 1

Pref:








P<sub>uw</sub>:

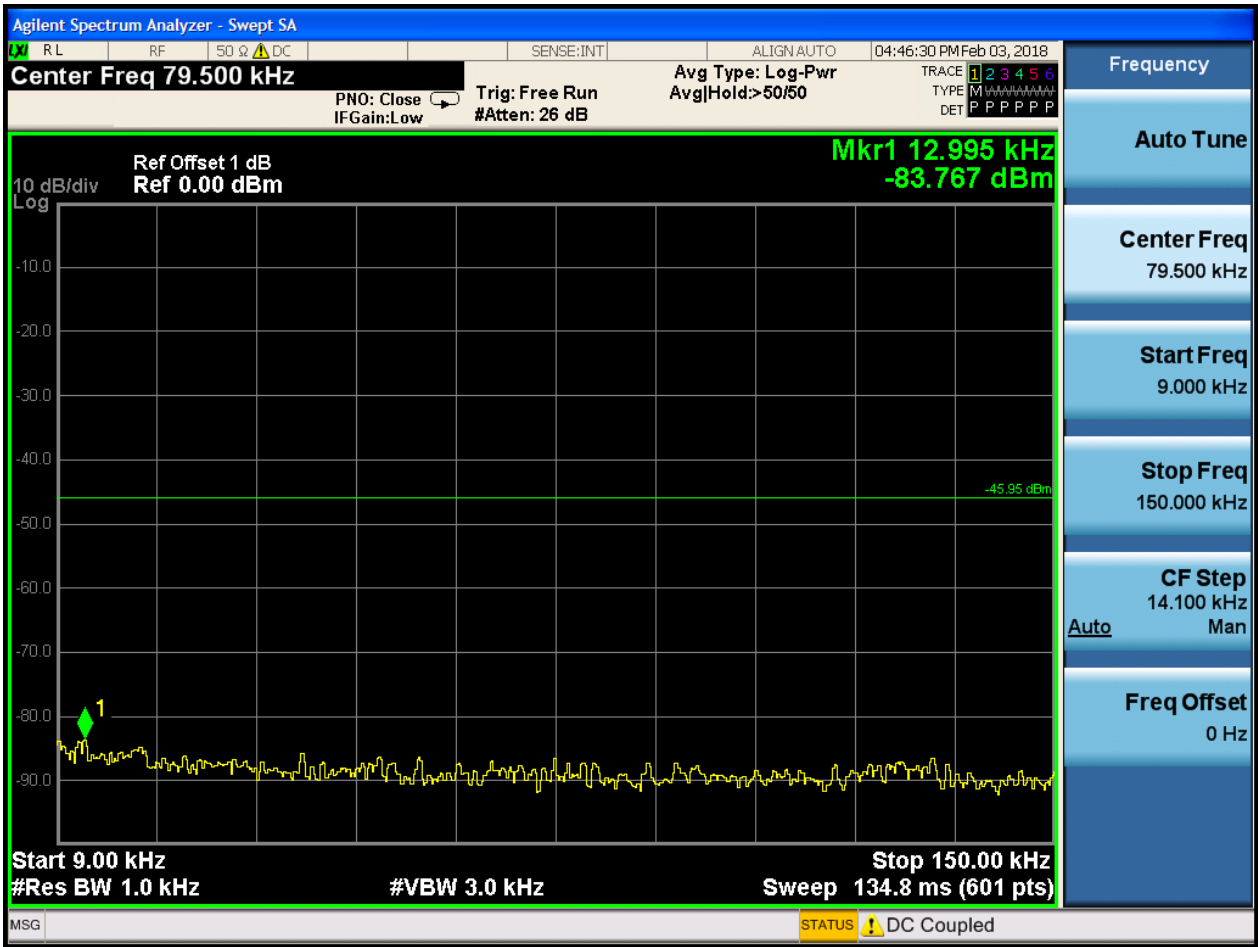



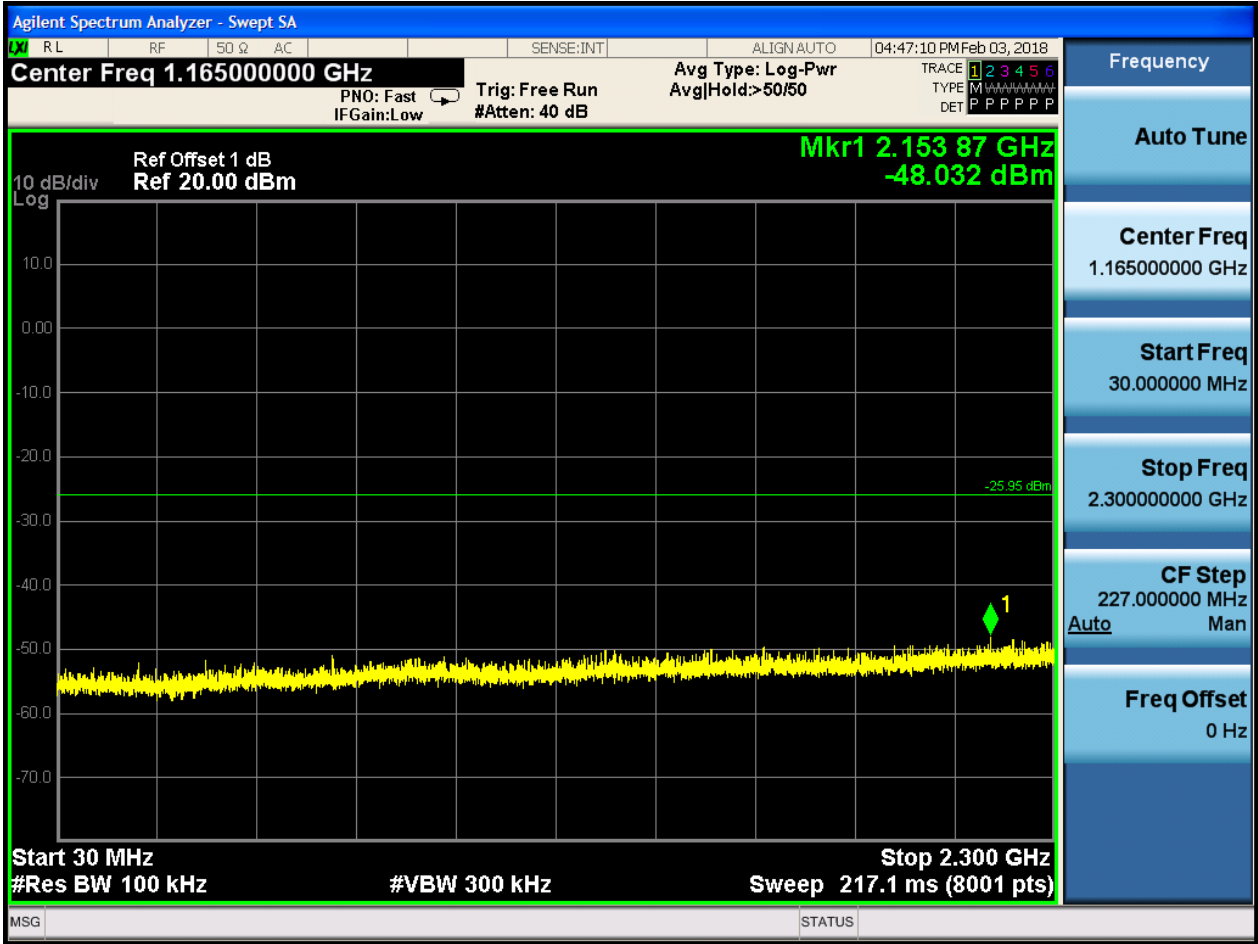

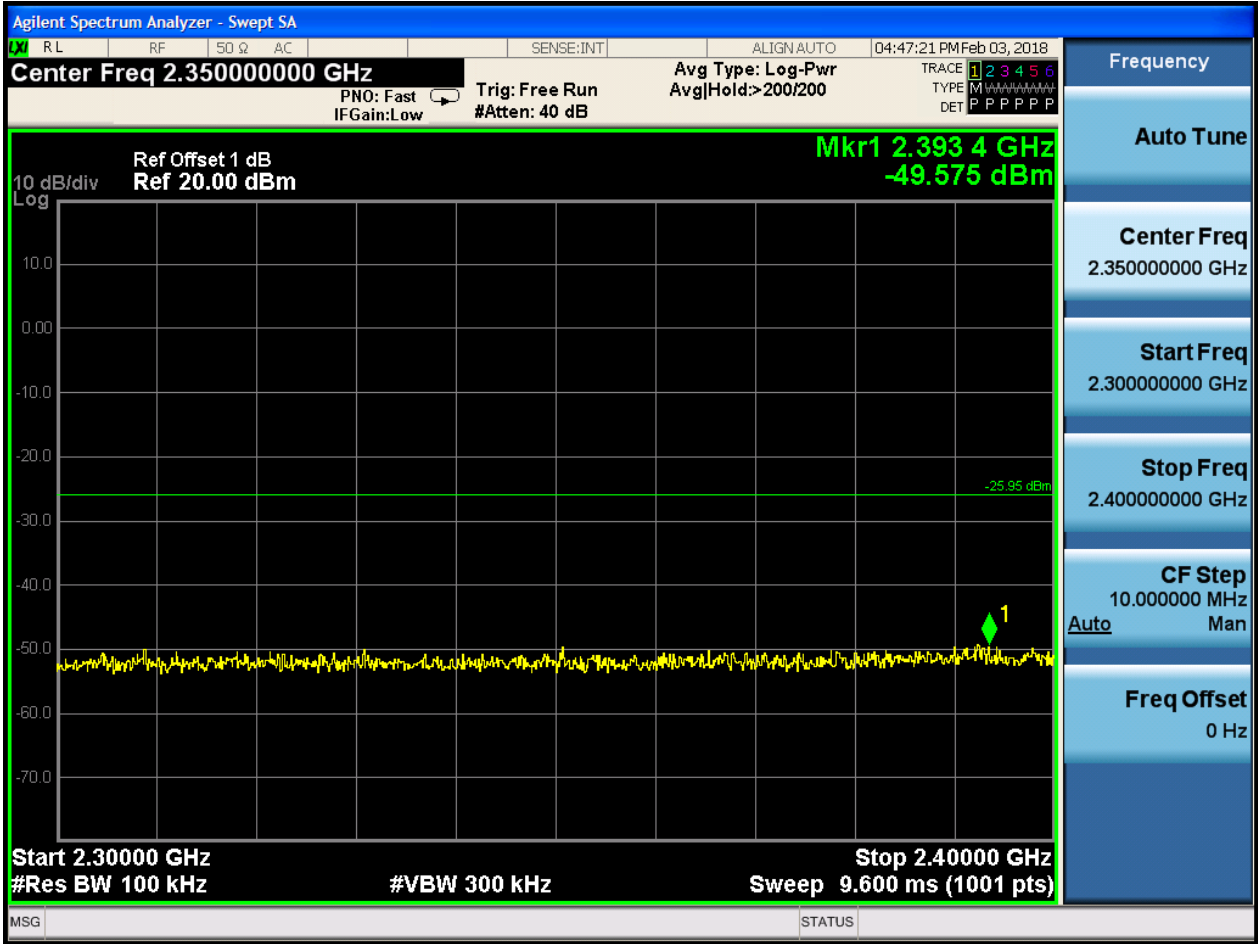

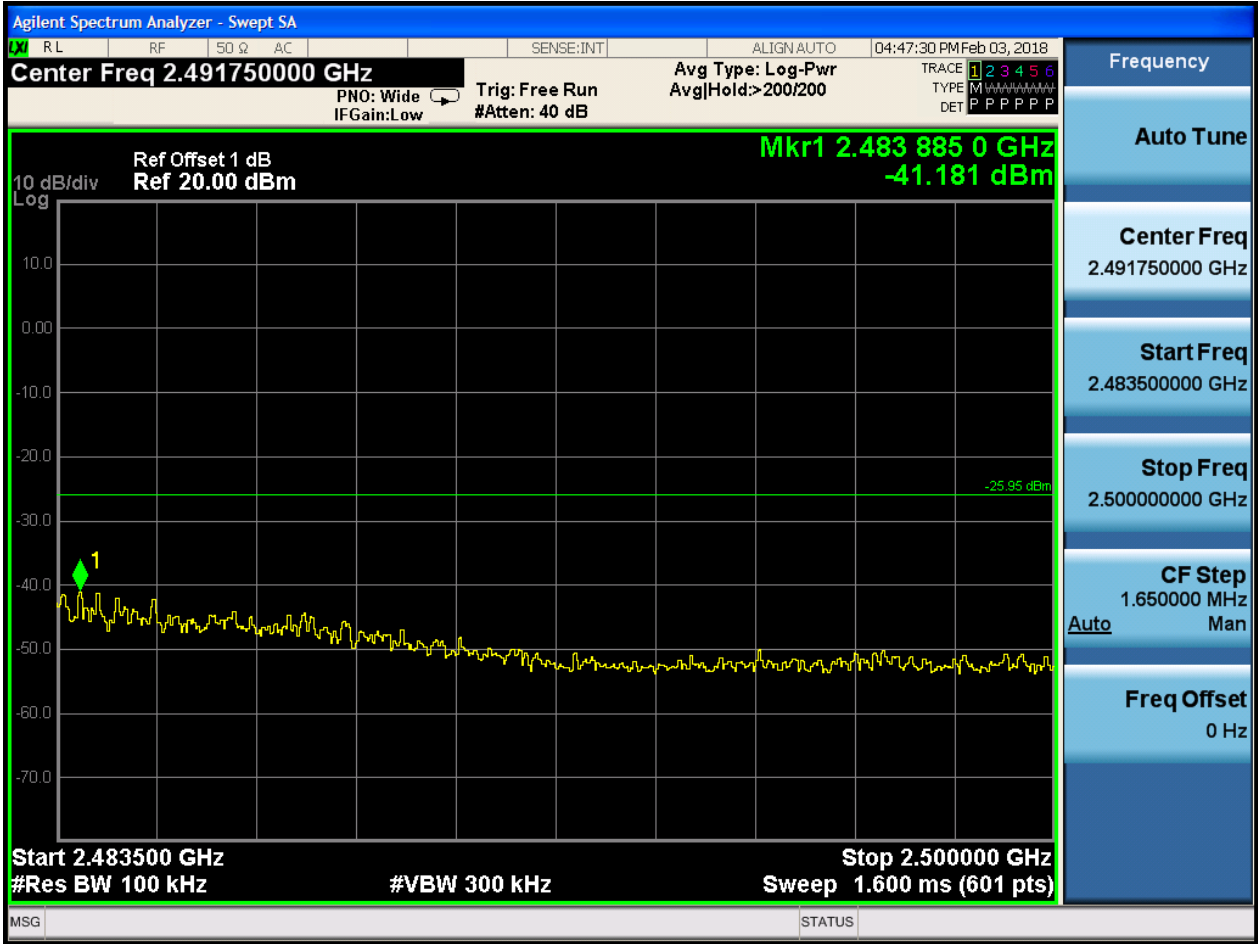









2.11 11N40\_L@Ant 1


Pref:

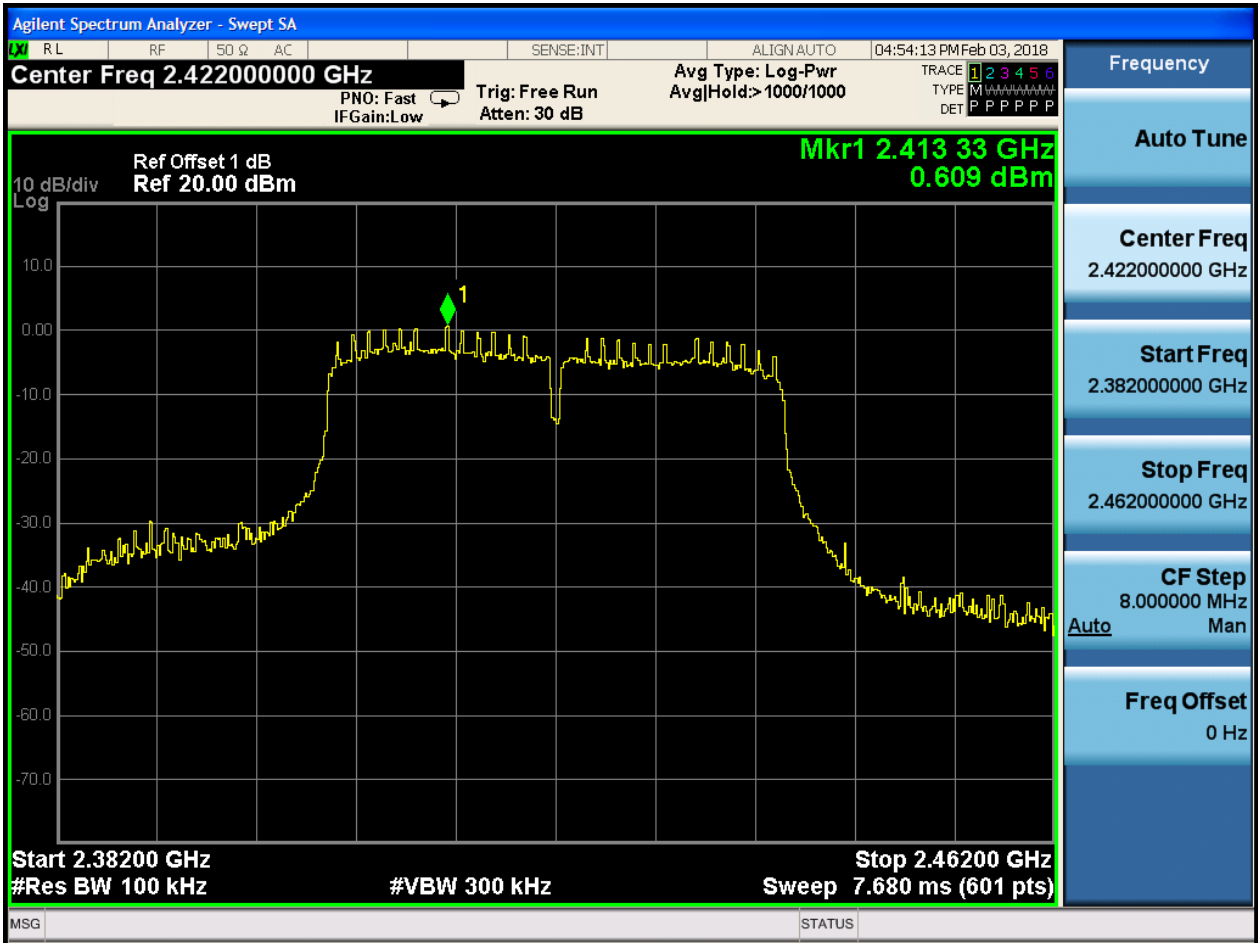





P<sub>uw</sub>:

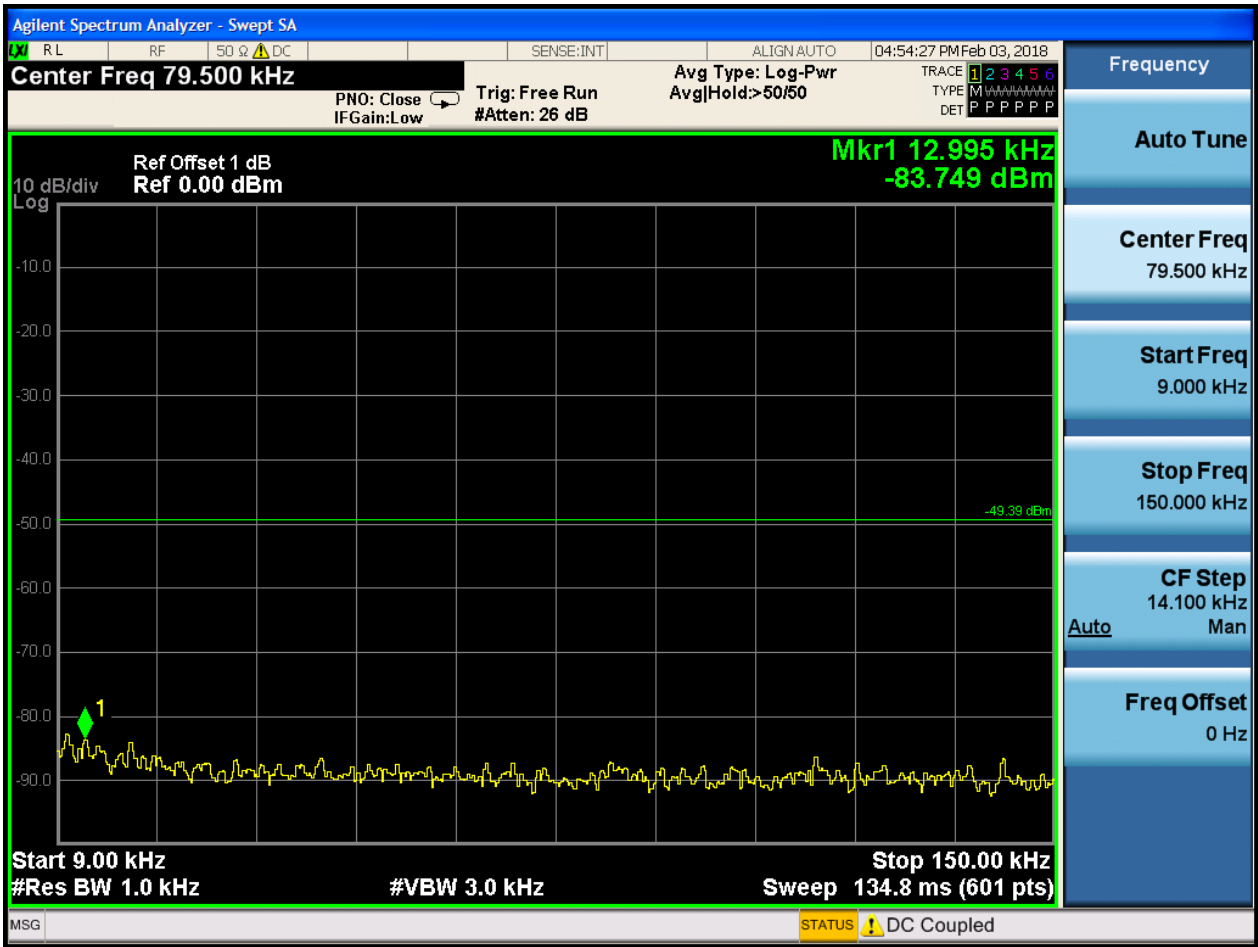

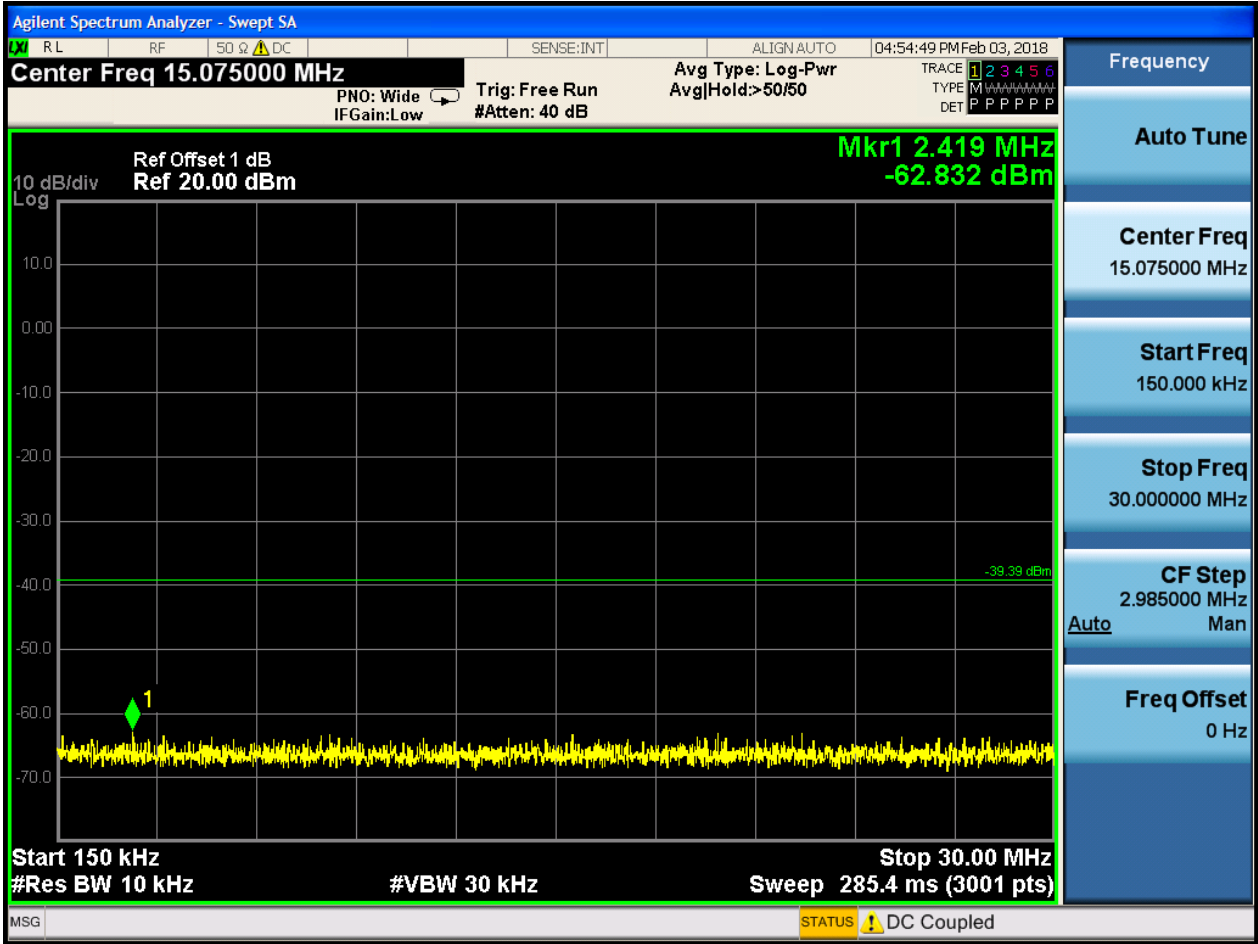

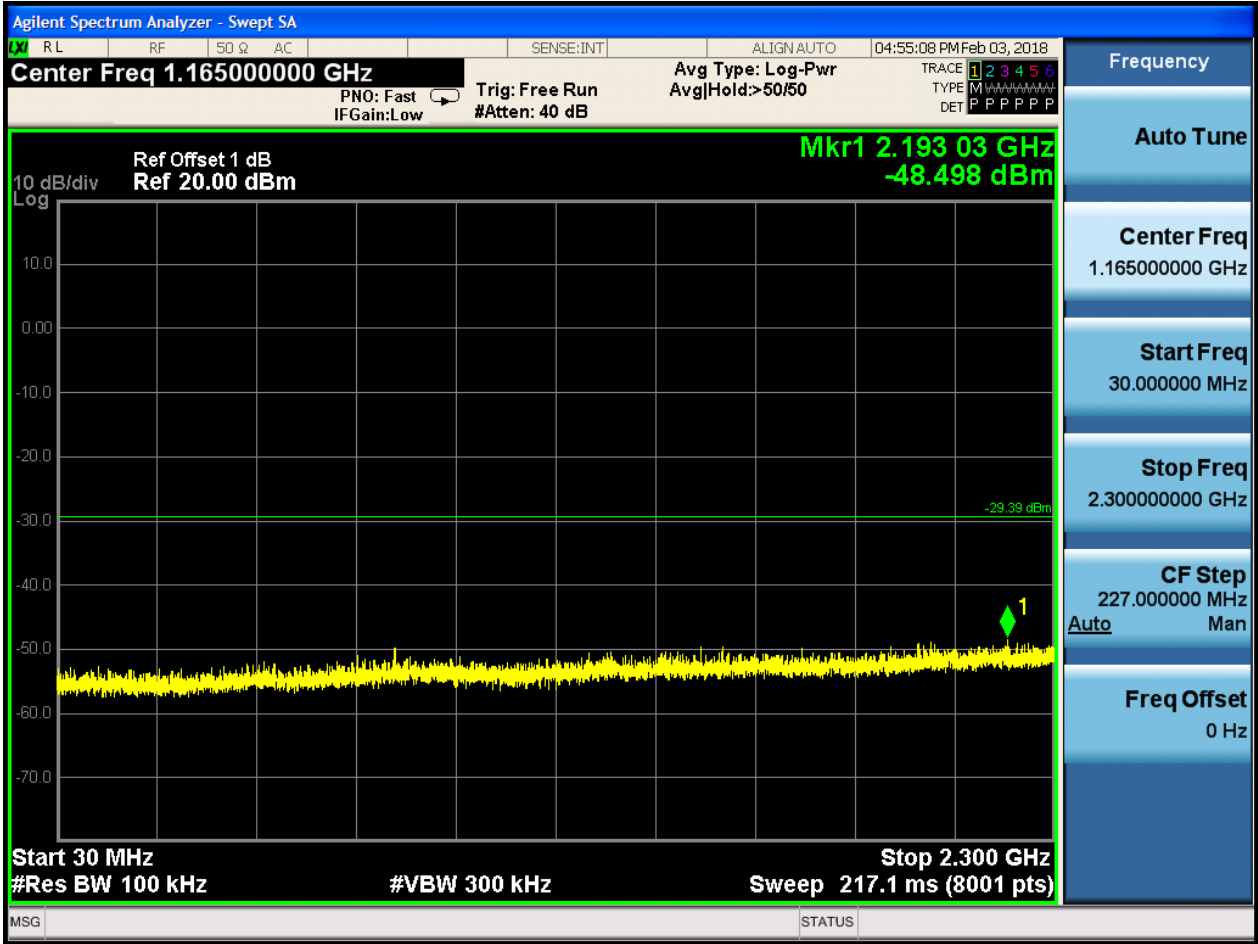

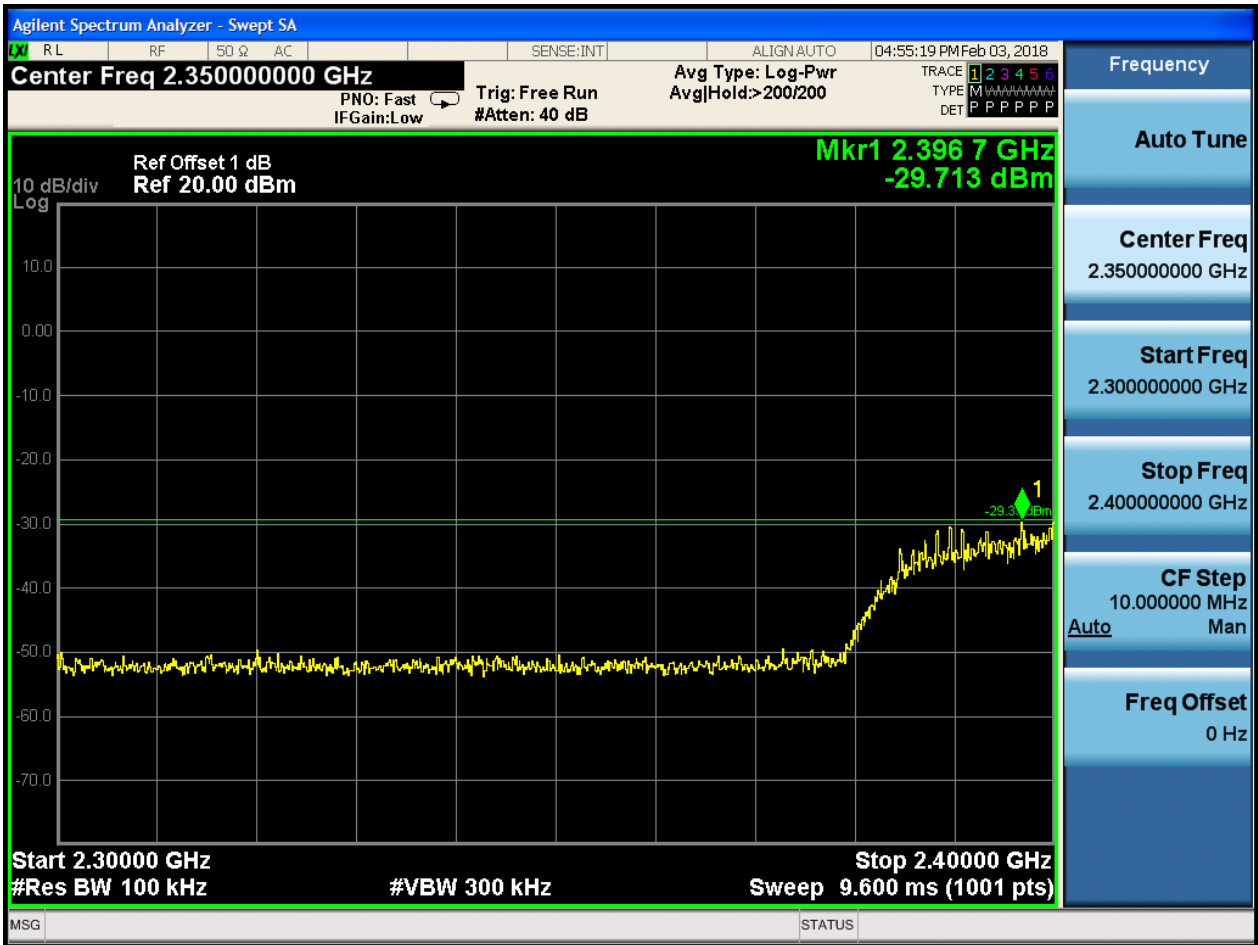






2.12 11N40\_M@Ant 1


Pref:

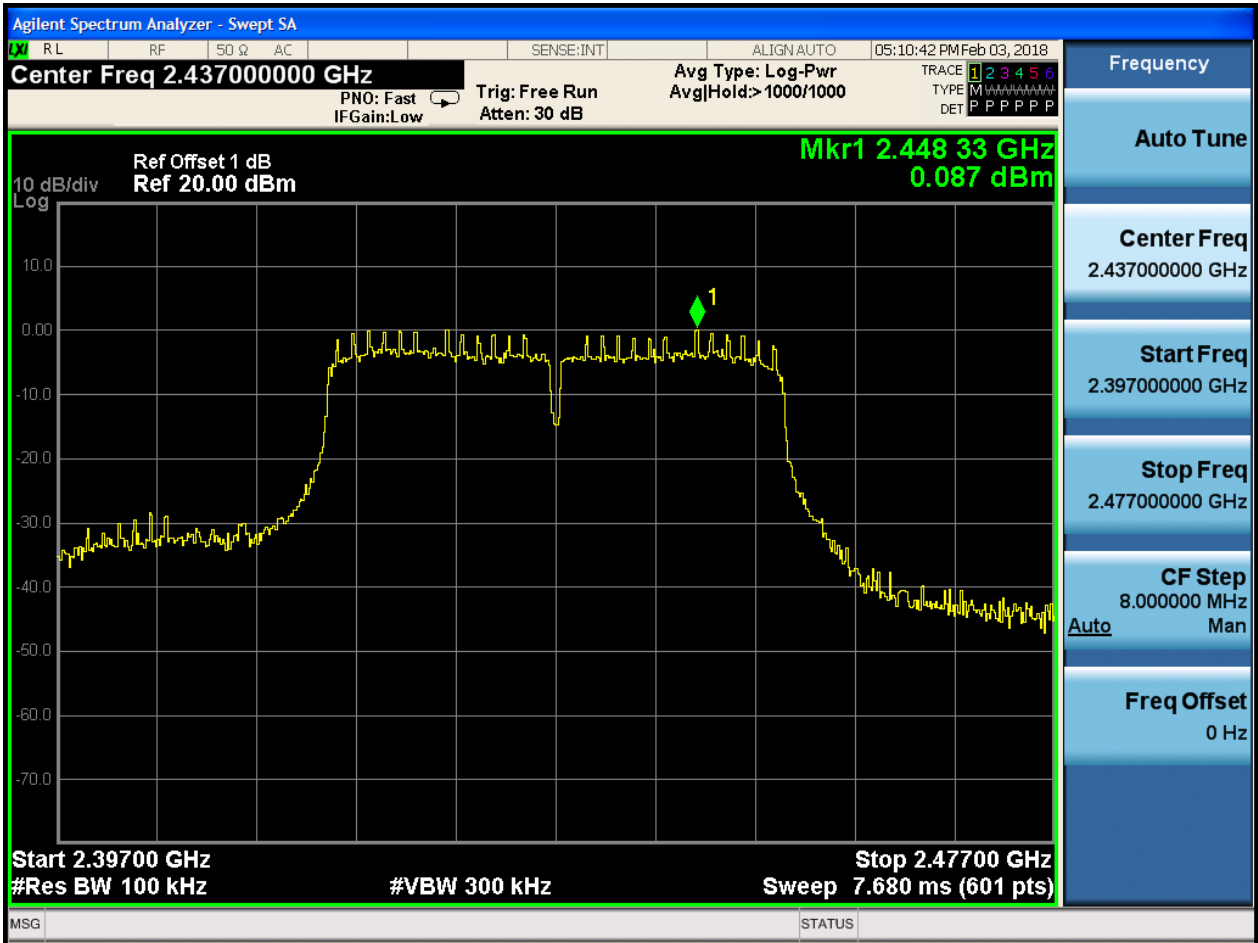









P<sub>uw</sub>:

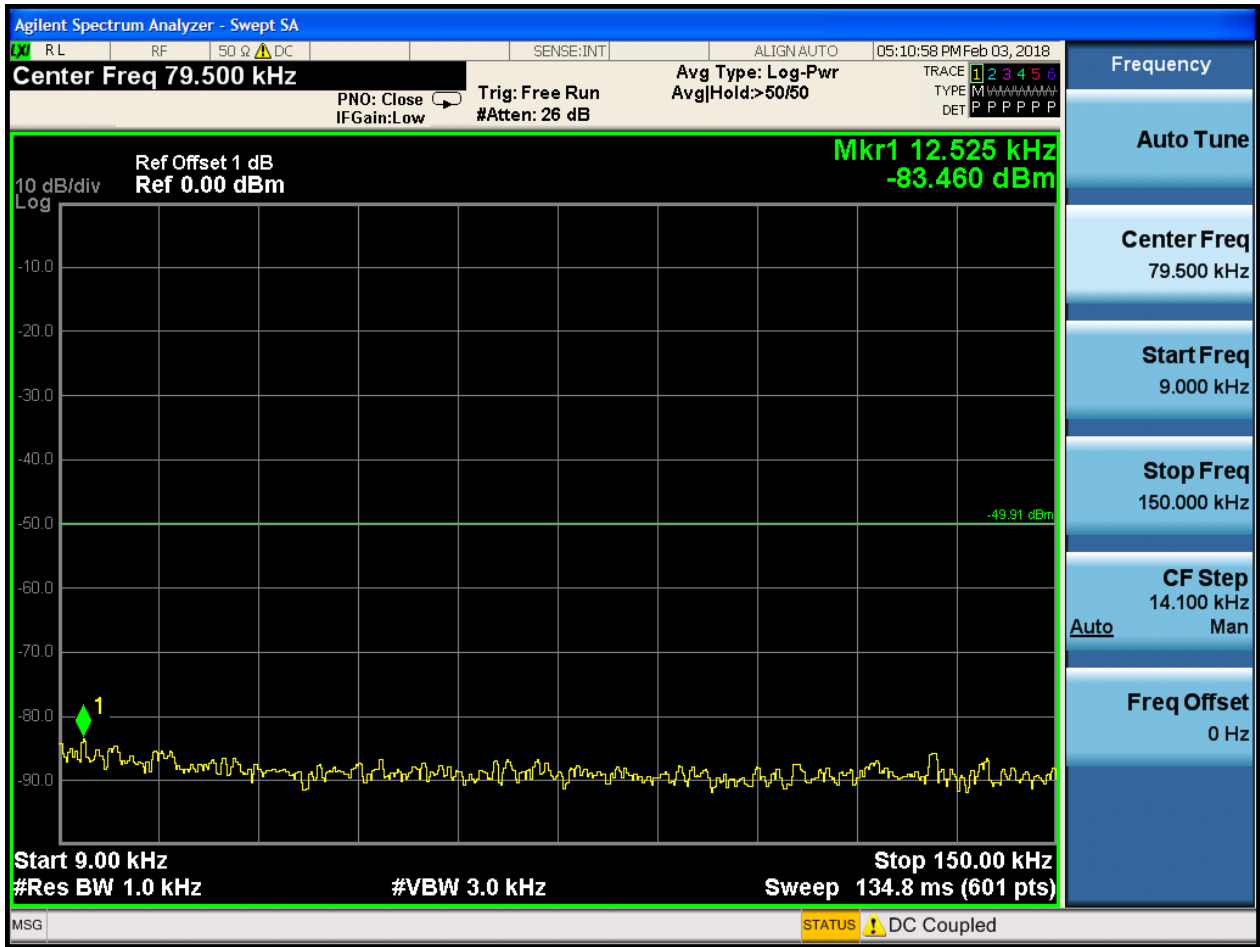

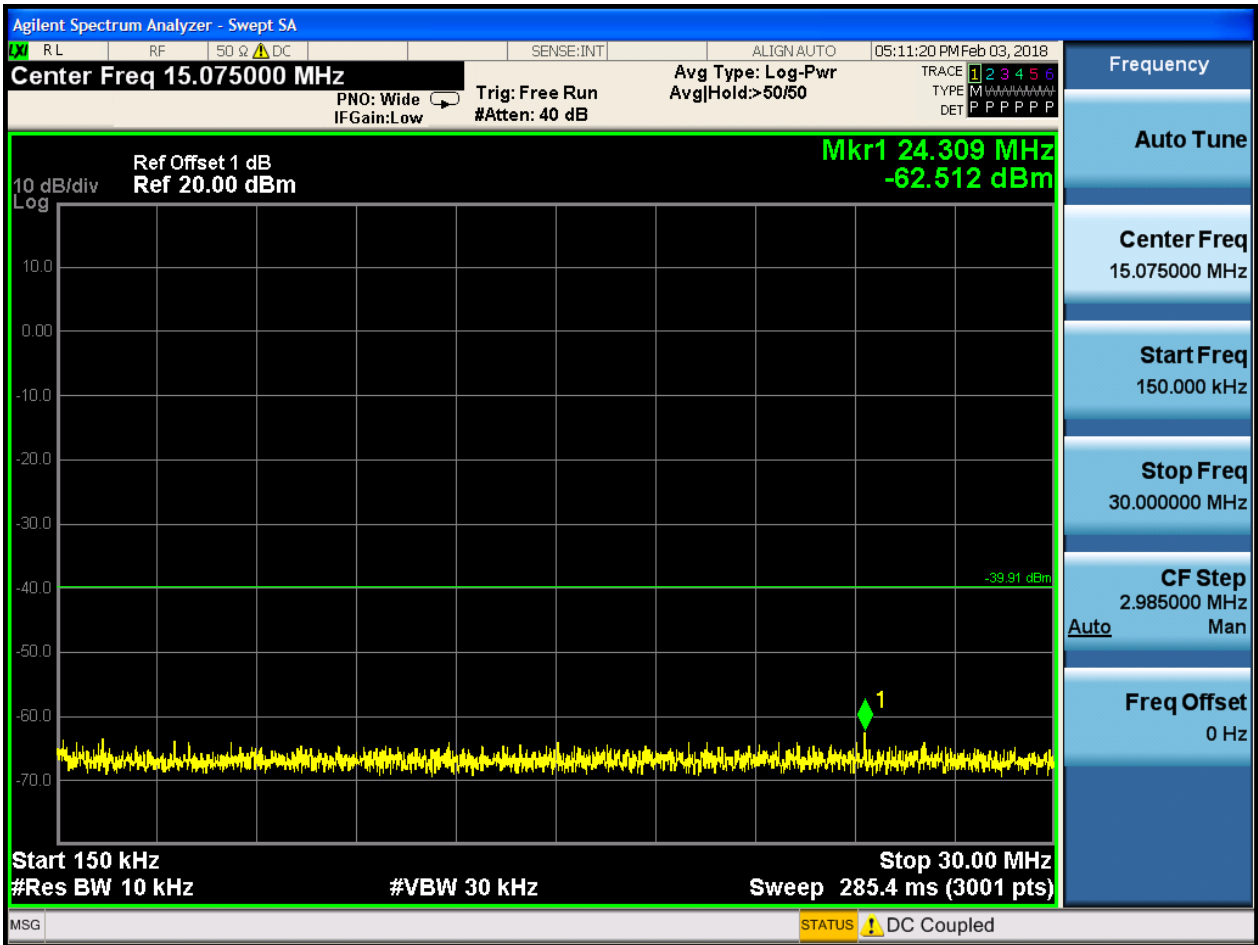

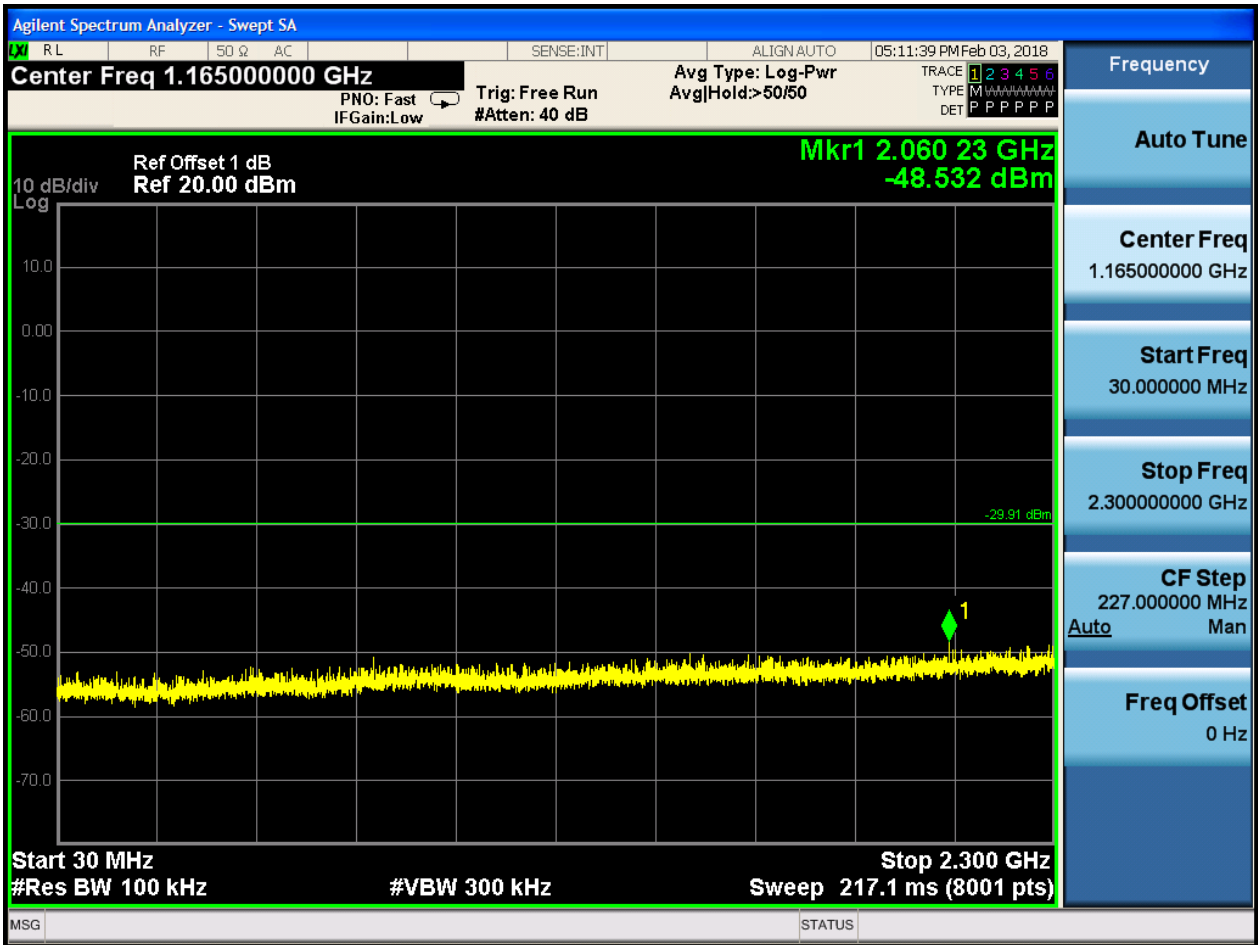

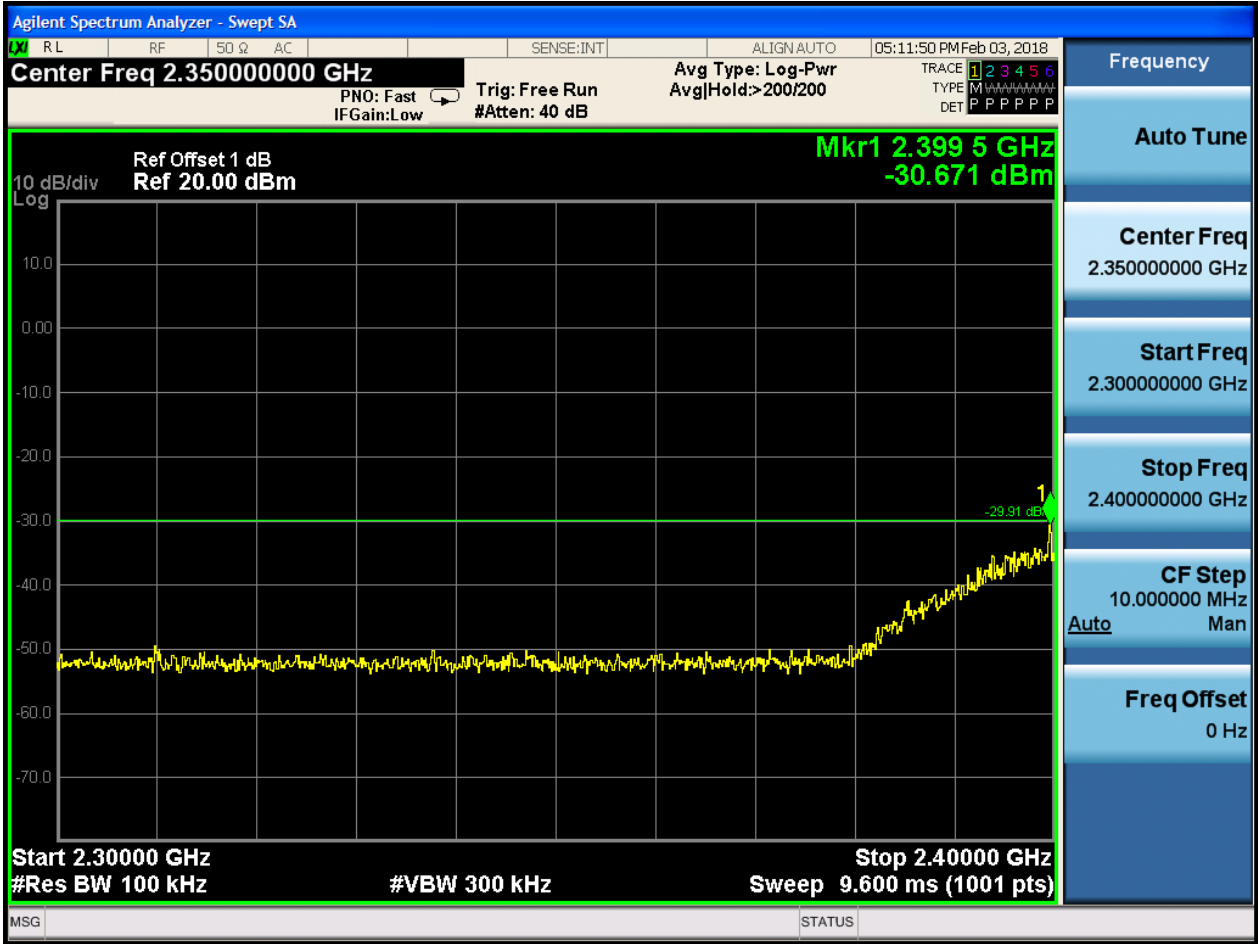


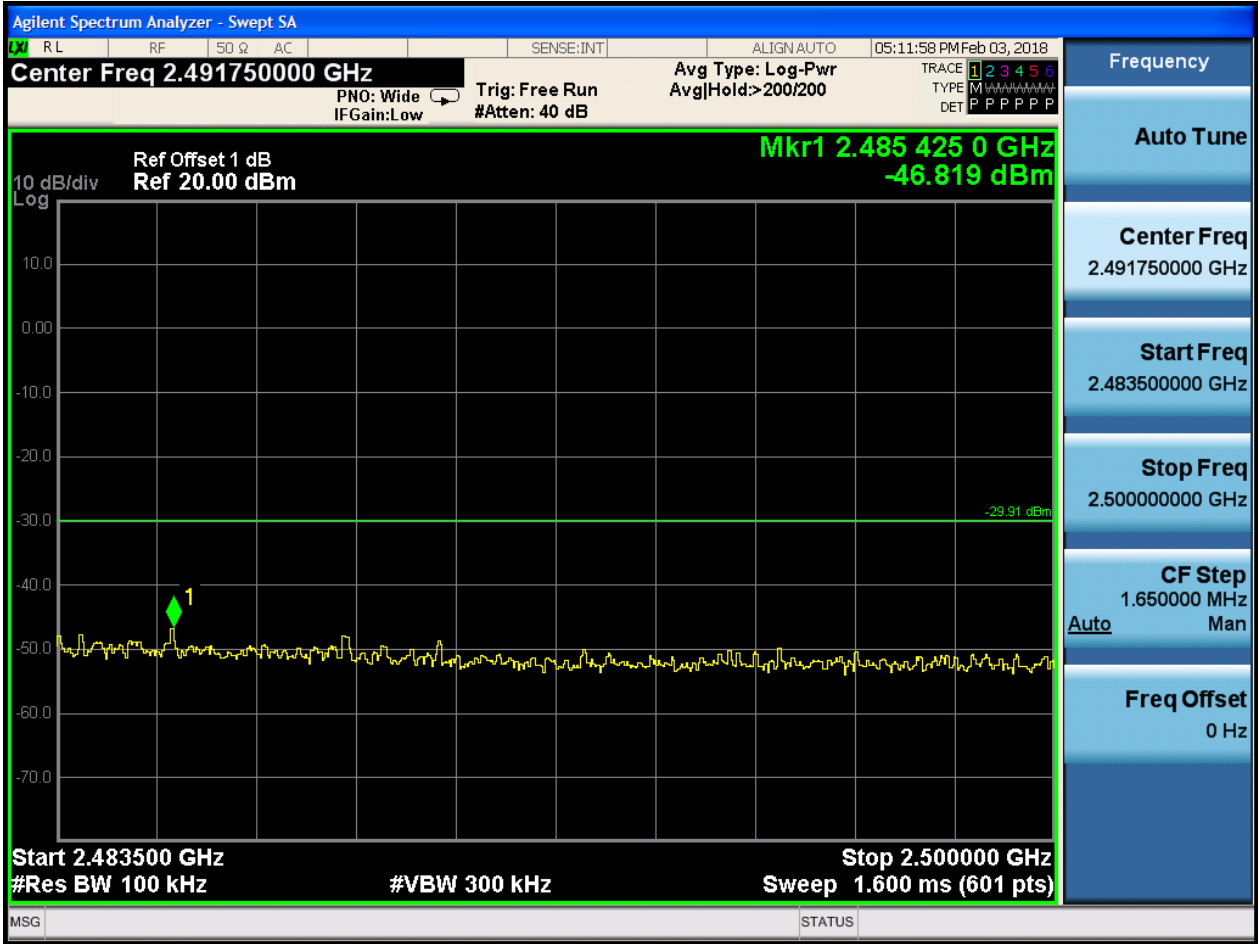




2.13 11N40\_H@Ant 1

Pref:

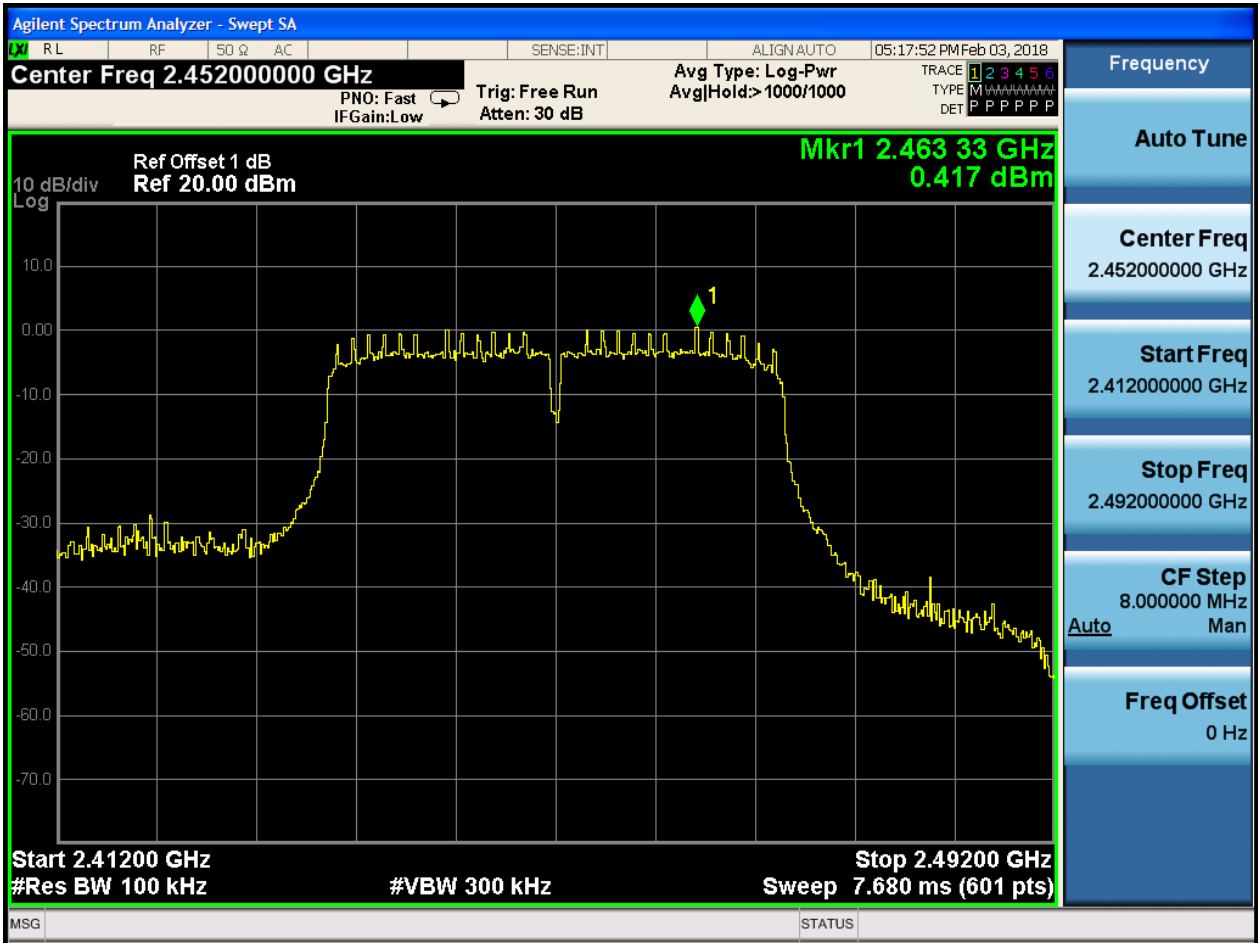






P<sub>uw</sub>:

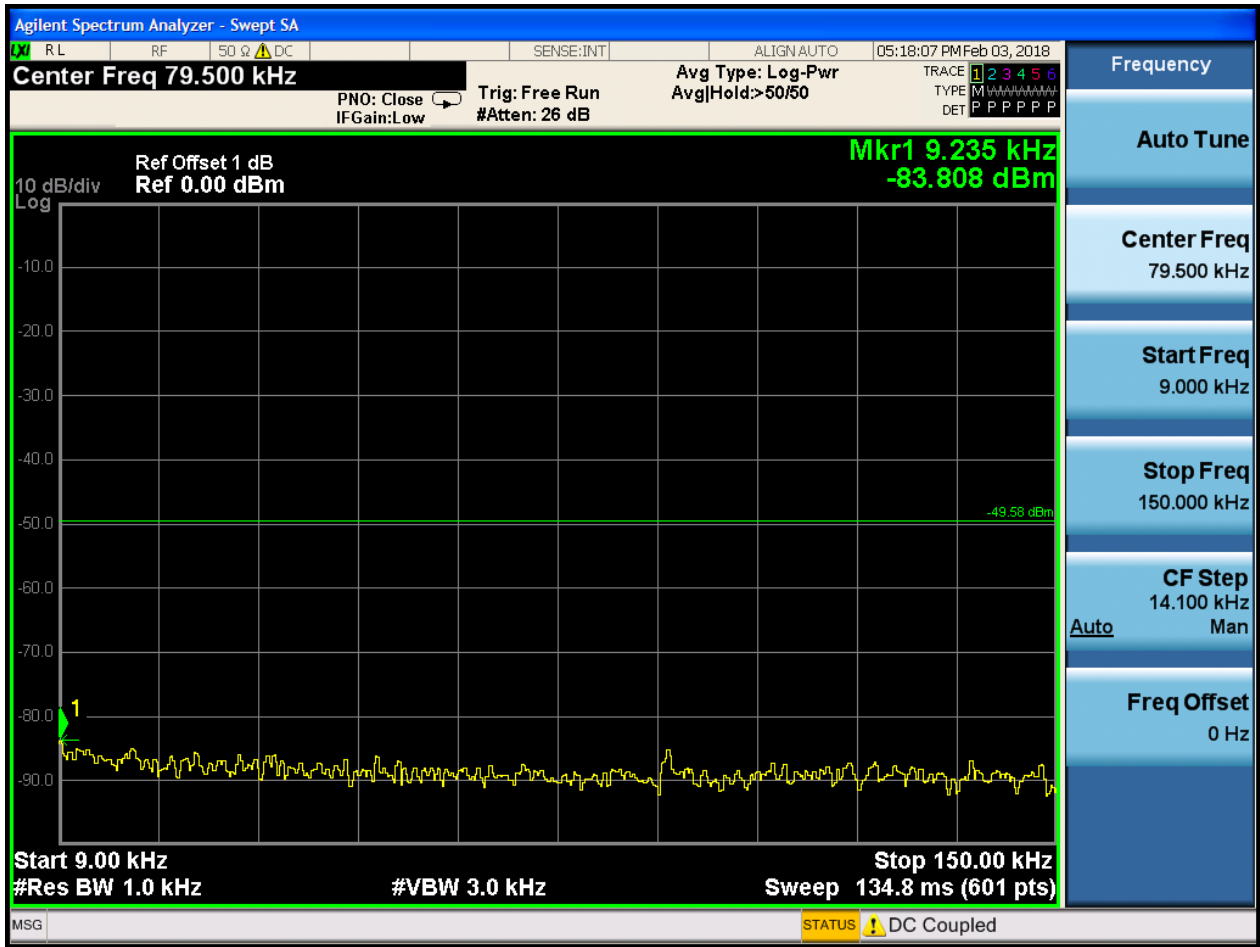




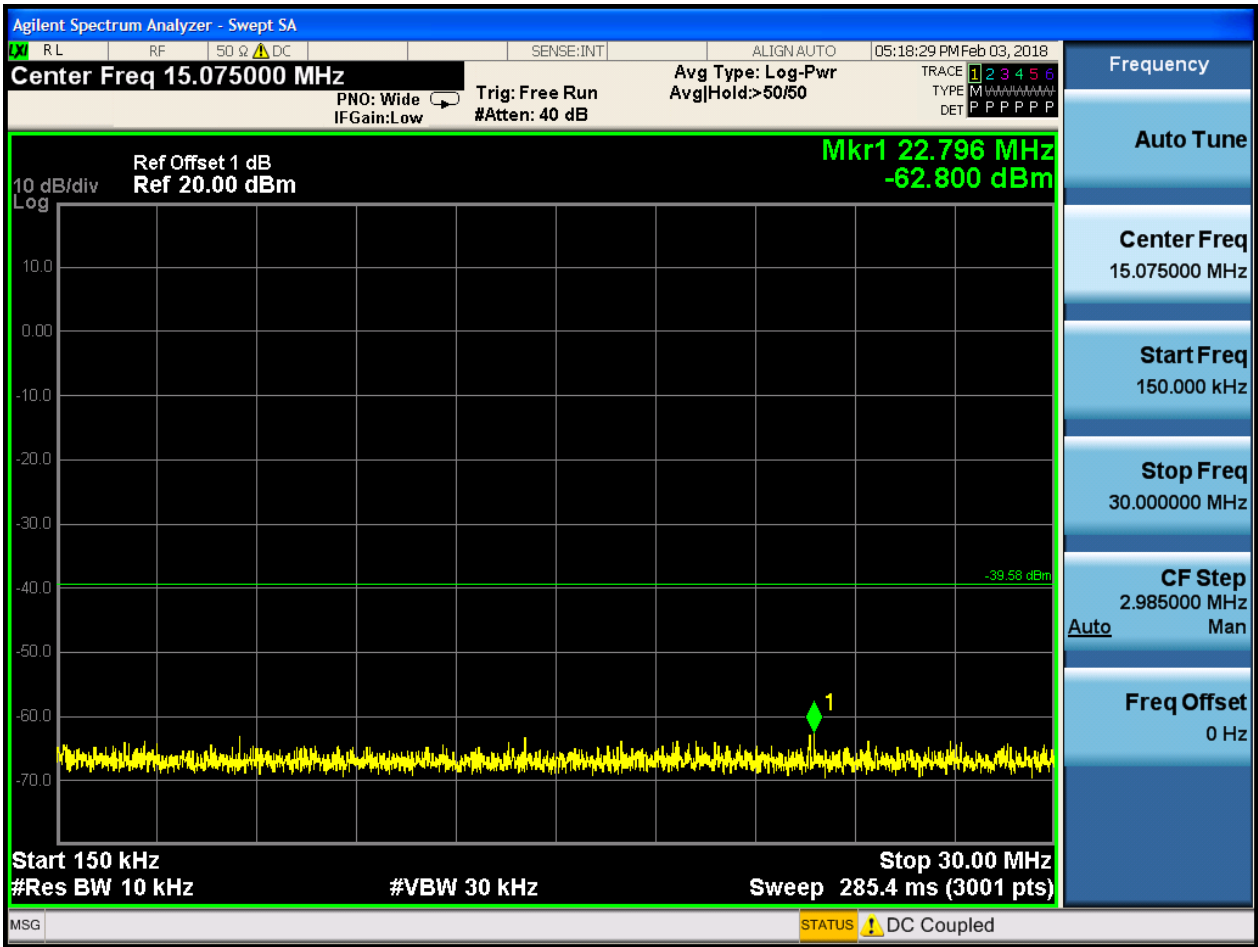

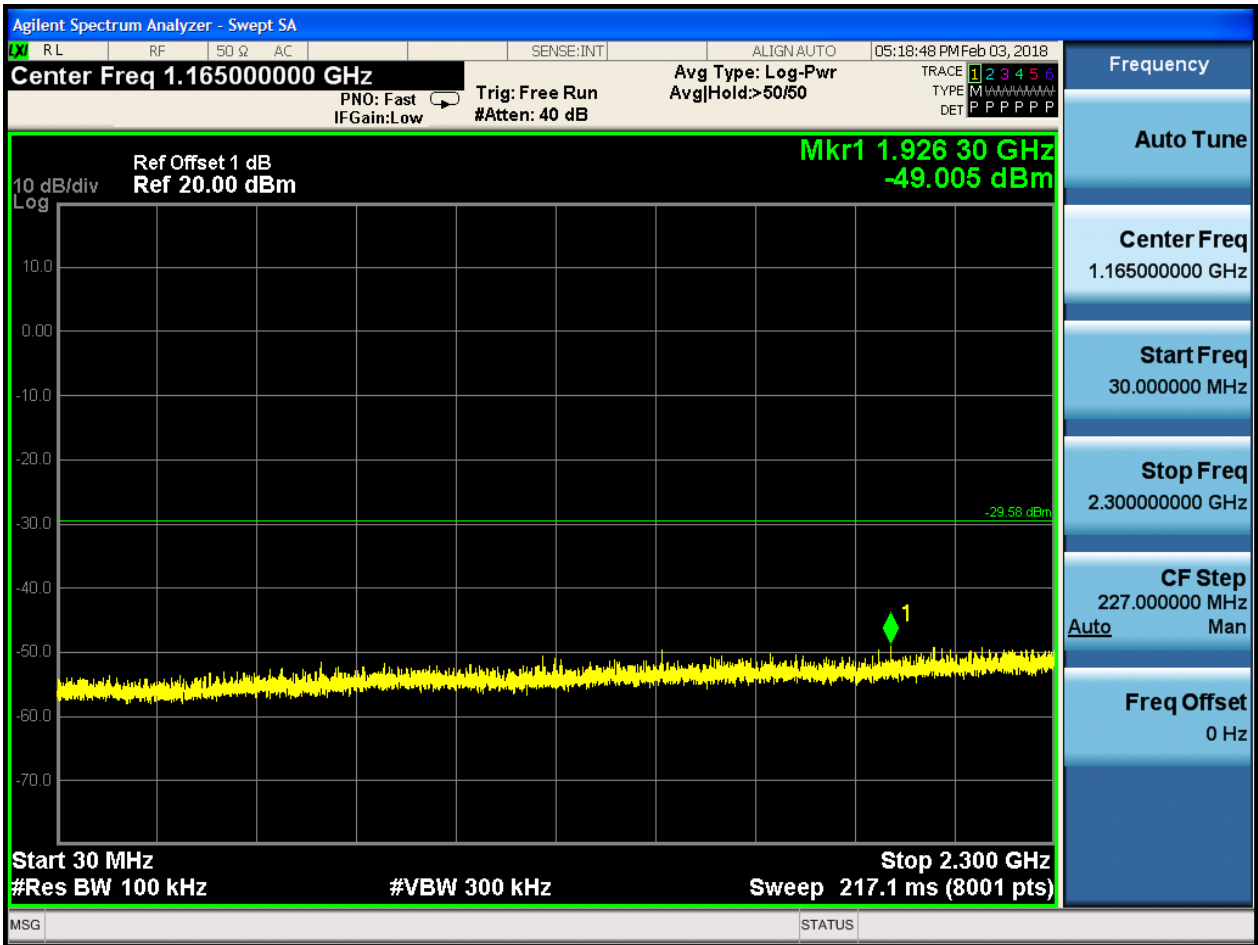

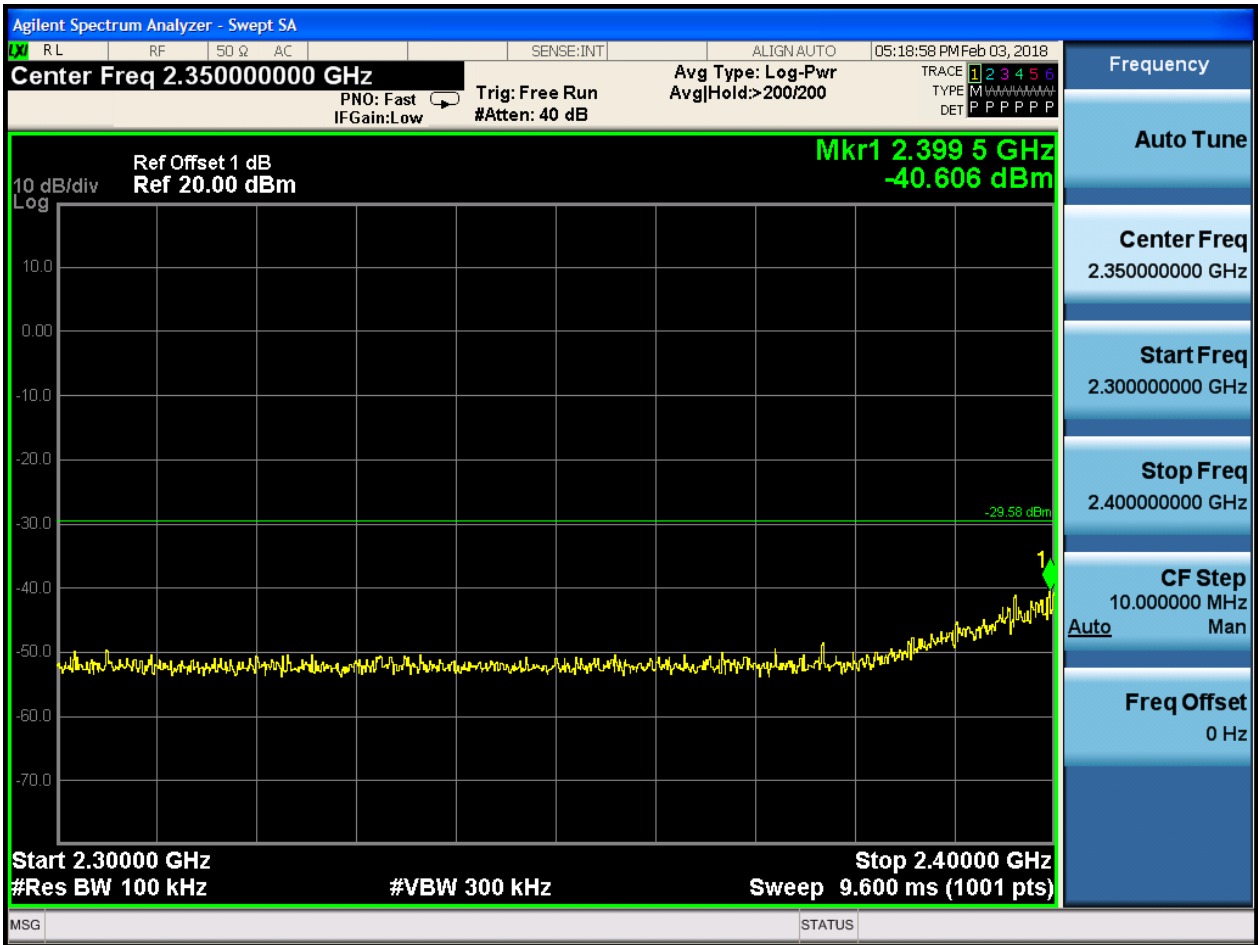

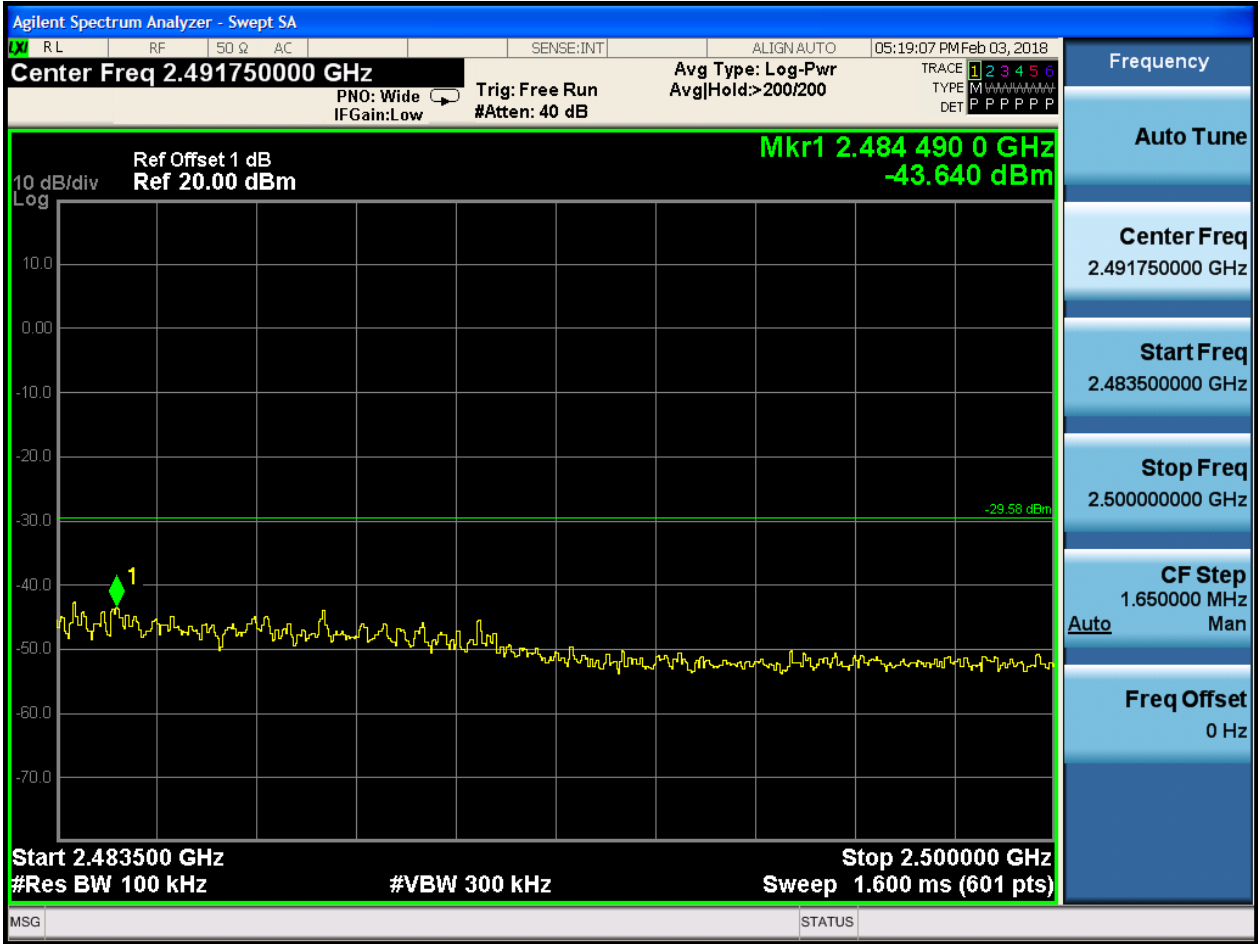



## Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case

.Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


**1.1 Part 1: Testing Range of “9 kHz to 30MHz”**

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

**1.2 Part 2: Testing Range of “30 MHz to 1 GHz”**

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

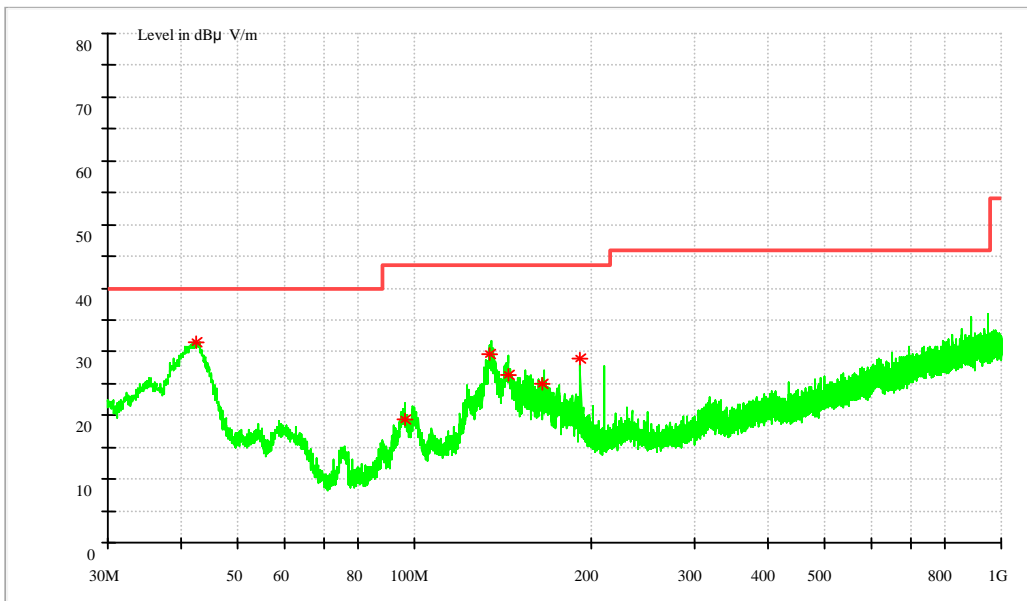

**MEASUREMENT RESULT: QP Detector**

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
42.45136	31.51	40	8.49	100	H	143	17.6
96.41780	19.25	43.5	24.25	119	H	237	10.7
134.16108	29.69	43.5	13.81	110	H	143	13.7
144.07728	26.38	43.5	17.12	109	H	156	13.0
165.55192	24.91	43.5	18.59	101	H	271	11.9
191.98424	28.94	43.5	14.56	161	V	290	12.2

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

### 1.3Part 3: Testing Range of “1 GHz to 3 GHz”


Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.


Test Mode:

#### 1.3.1 Test Mode: 11B\_ANT1

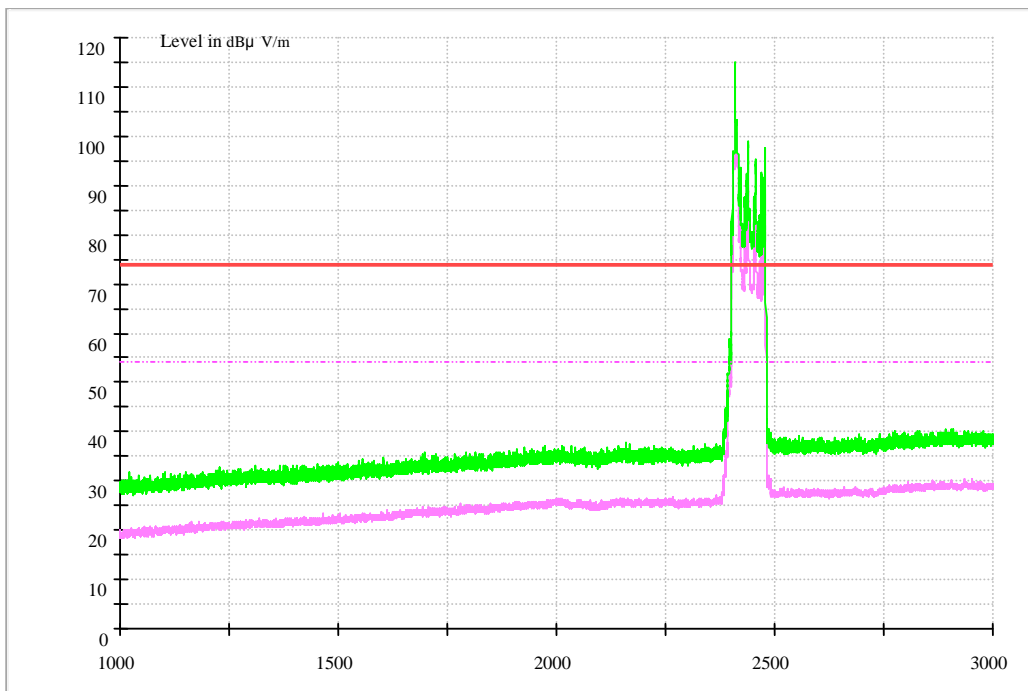



1.3.1.1 Channel 1 @Ant 1

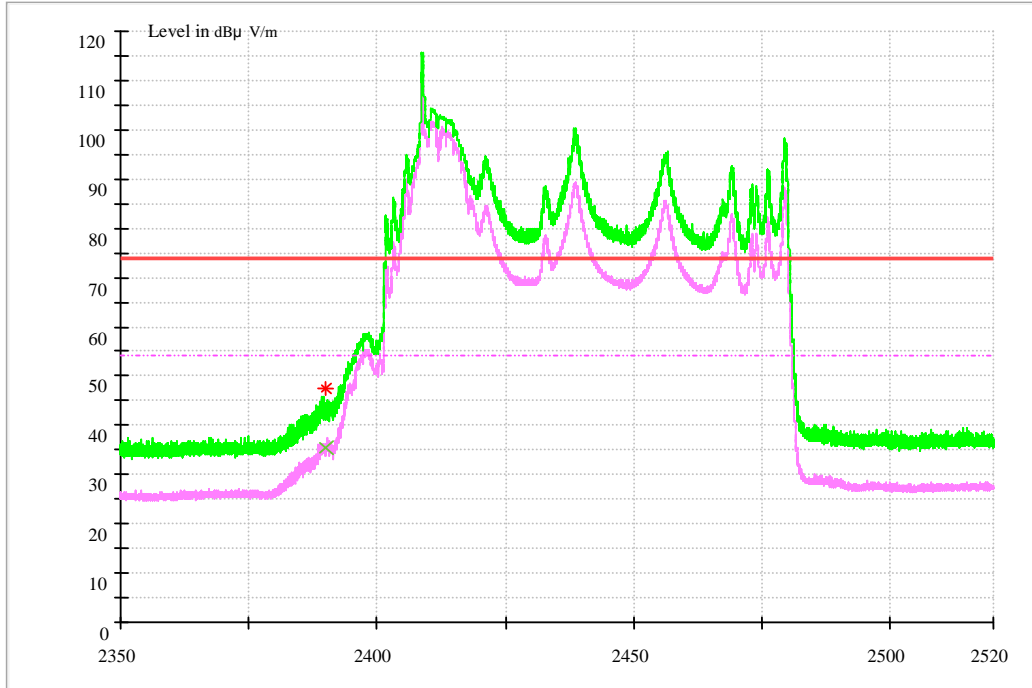

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	35.35	54.00	18.65	150.0	V	226.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	47.59	74.00	26.41	150.0	V	226.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.1.2 Channel 11@Ant 1

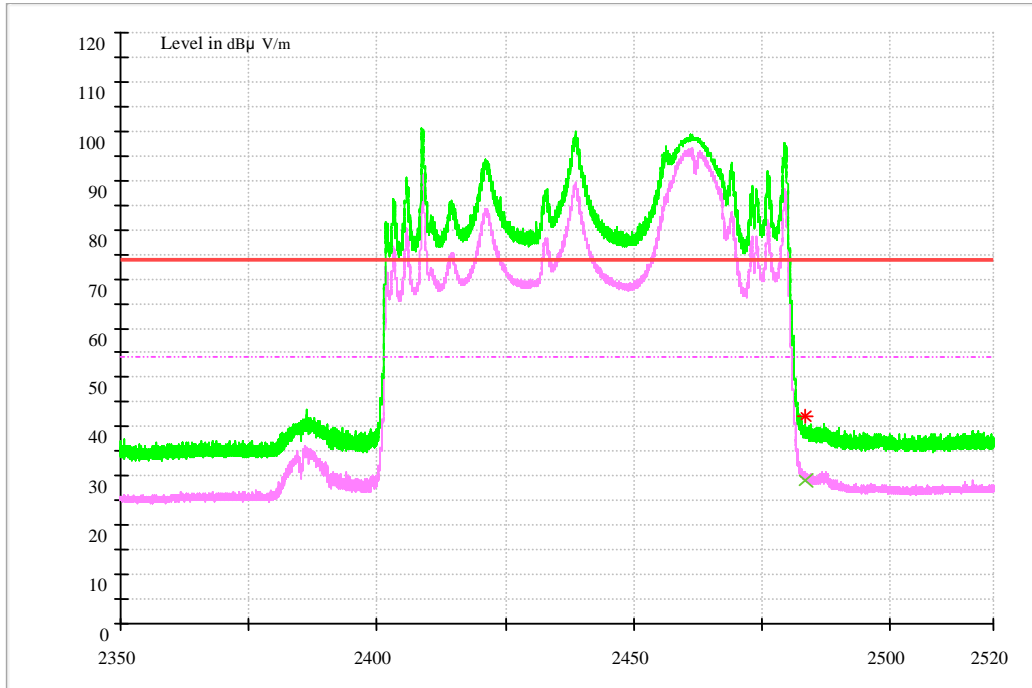

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	28.93	54.00	25.07	150.0	V	225.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	41.98	74.00	32.02	150.0	V	221.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

## 1.3.2 Test Mode: 11G\_ANT1

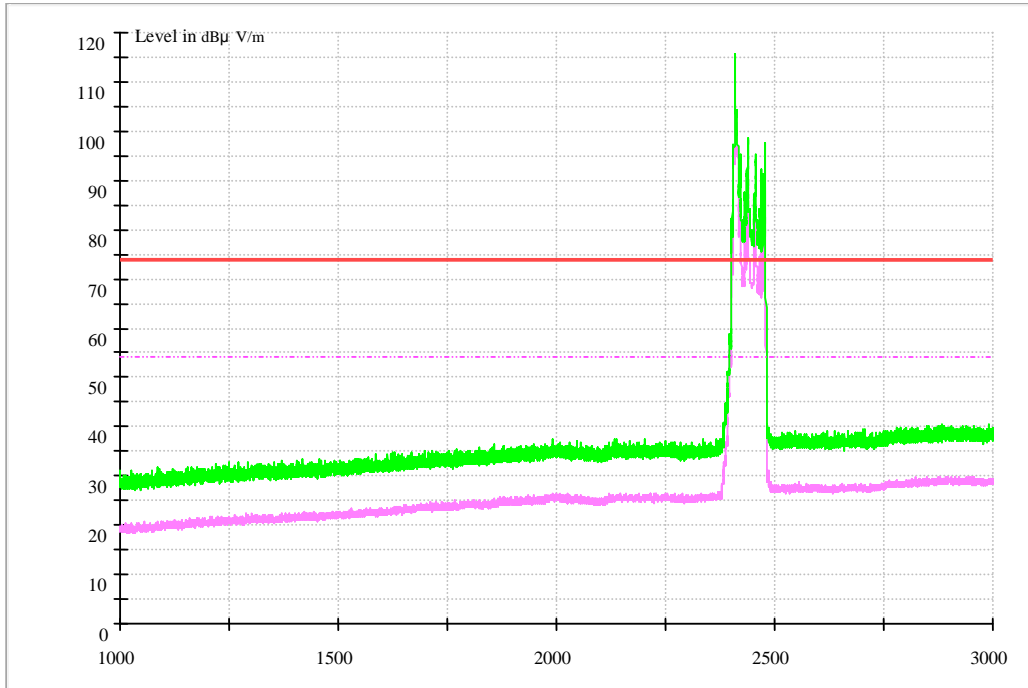

1.3.2.1 Channel 1\_2412 @Ant 1

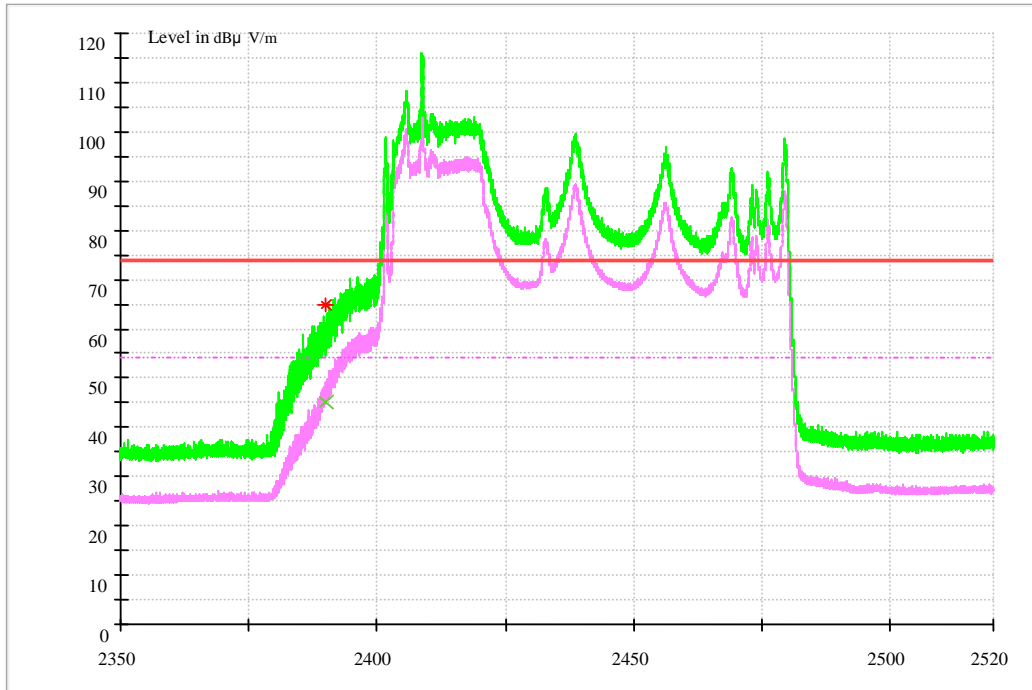

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	45.17	54.00	8.83	150.0	H	226.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	64.90	74.00	9.10	150.0	H	237.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.2 Channel 2\_2417 @Ant 1

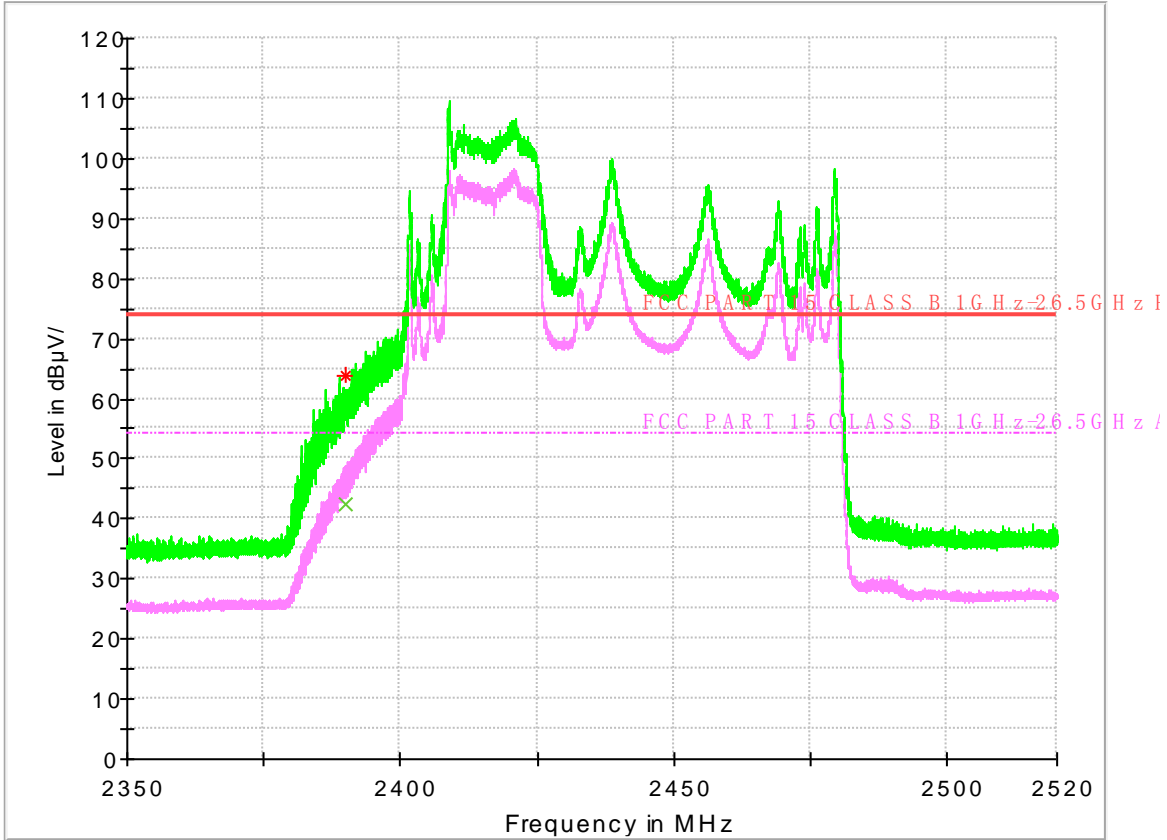

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	42.38	54.00	11.62	150.0	H	117.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	63.84	74.00	10.16	150.0	H	266.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.3 Channel 11@Ant 1

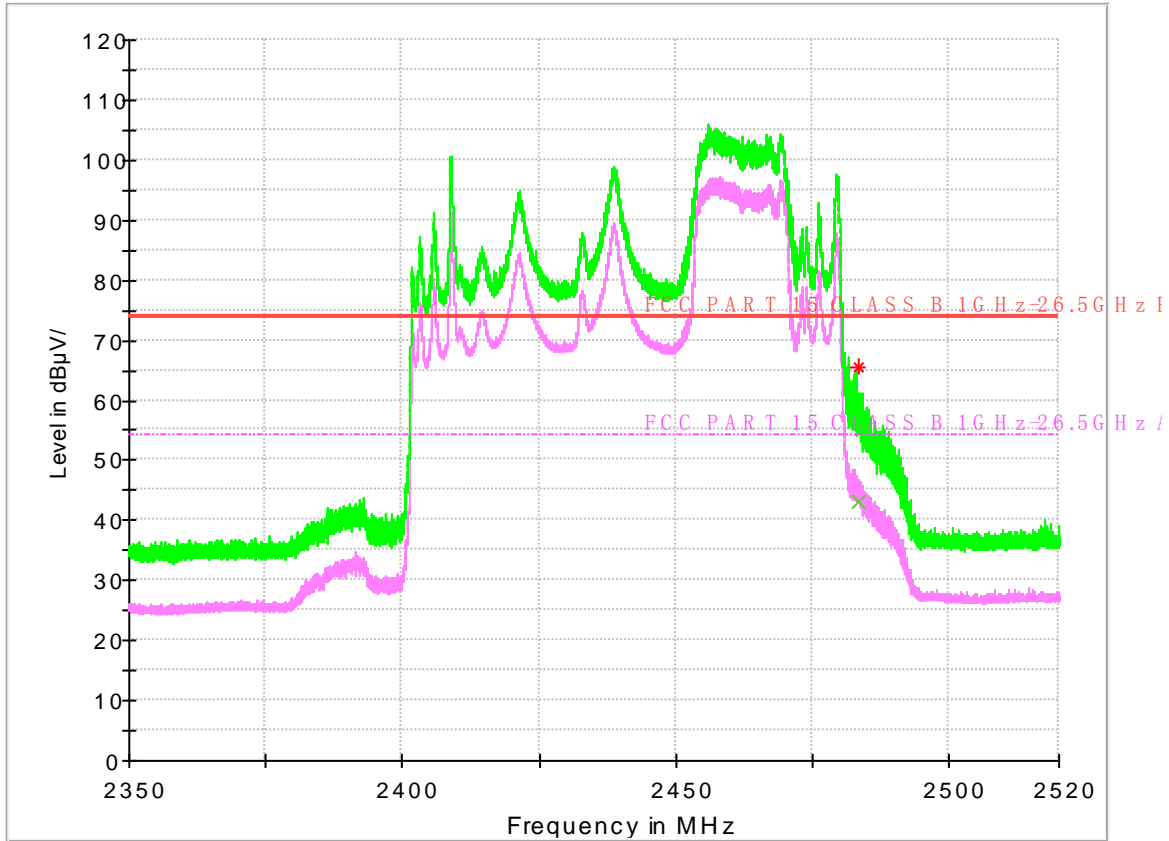

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	43.08	54.00	10.92	150.0	H	74.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	65.59	74.00	8.41	150.0	H	97.0	-6.8


Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)  
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit – Level

## 1.3.3 Test Mode: 11N20\_ANT1

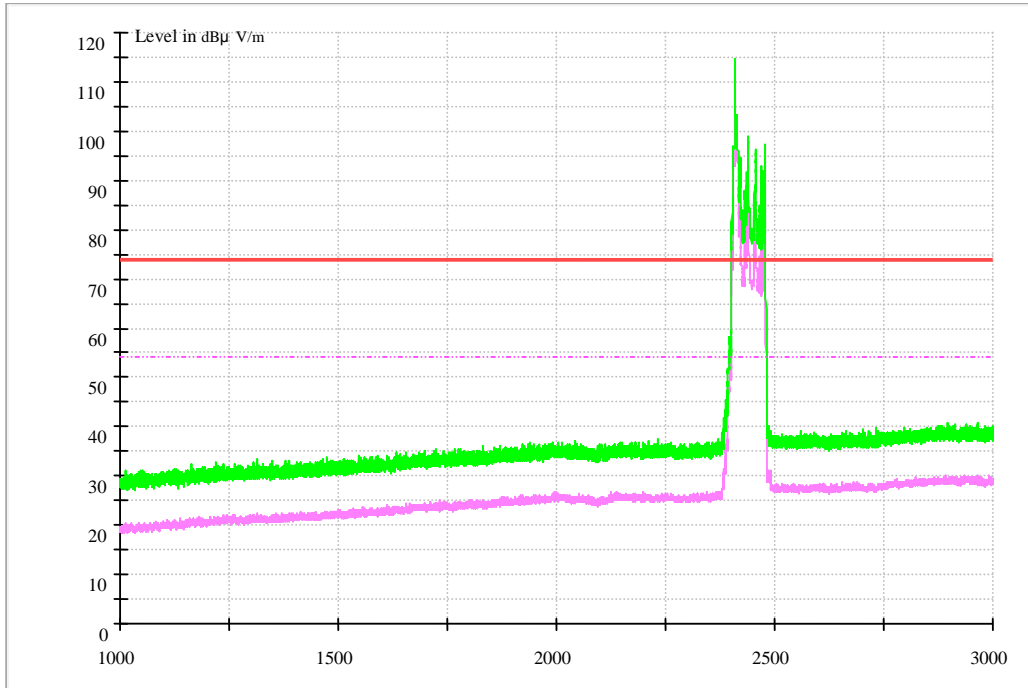

1.3.3.1 Channel 1@Ant 1

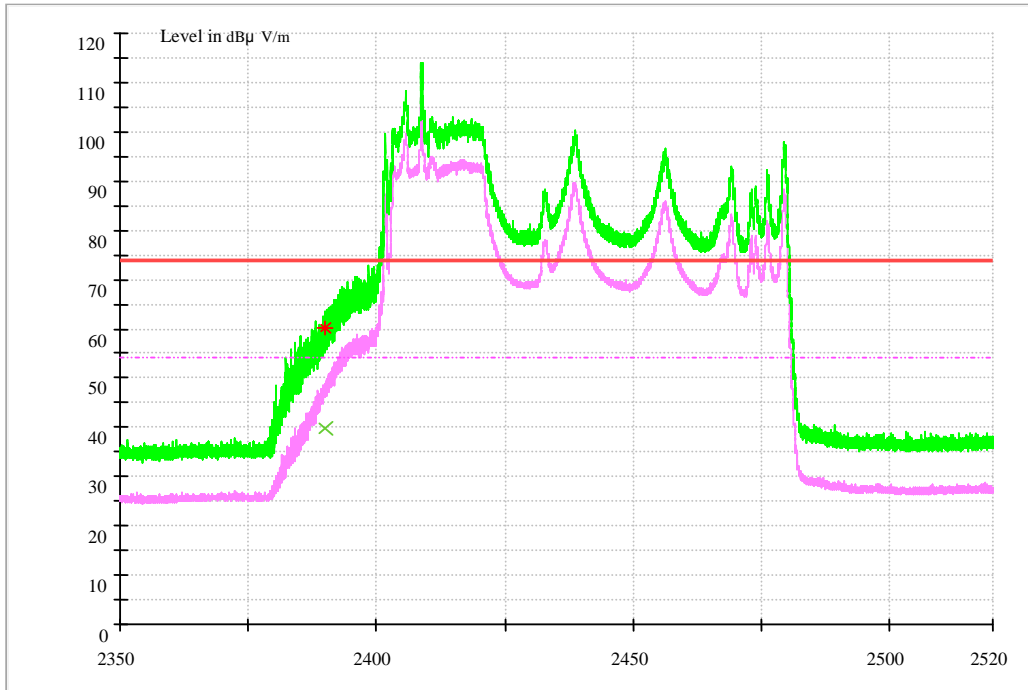

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	39.61	54.00	14.39	150.0	V	255.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	60.25	74.00	13.75	150.0	V	253.0	-10.2

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level



1.3.3.3 Channel 11 @Ant1

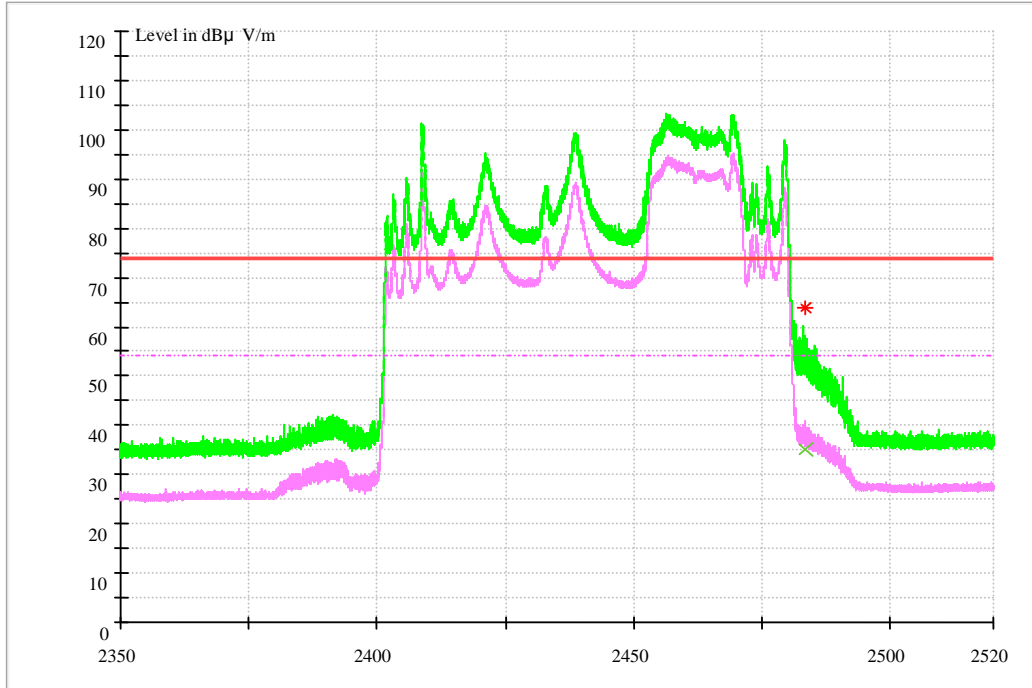

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	34.97	54.00	19.03	150.0	H	65.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	63.73	74.00	10.27	150.0	H	85.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

## 1.3.4 Test Mode: 11N40\_ANT1

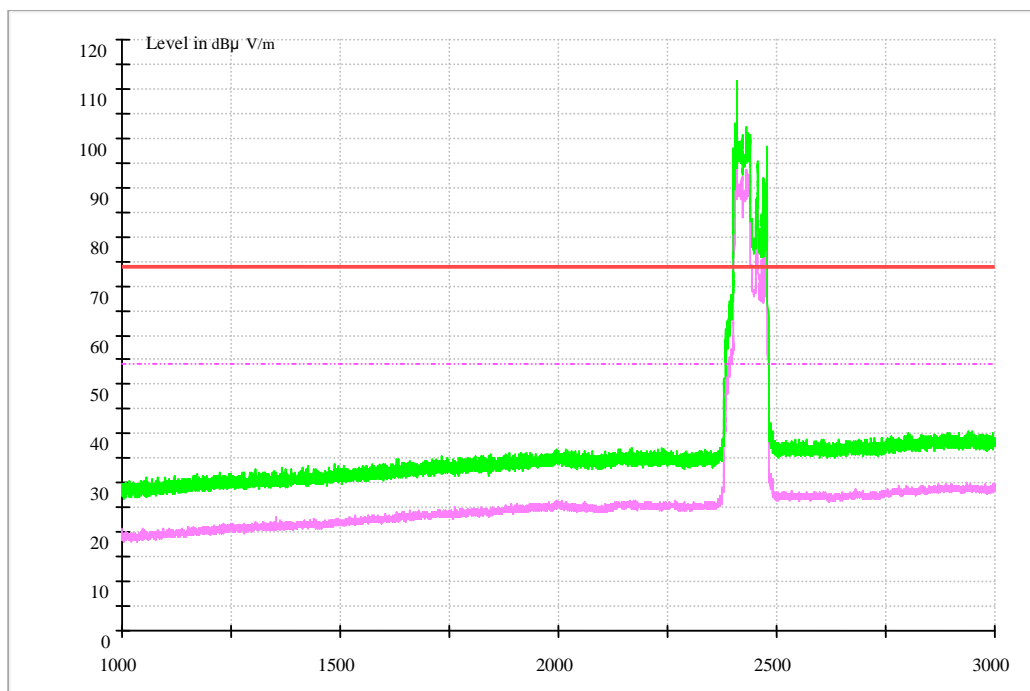

1.3.4.1 Channel 3 @Ant 1

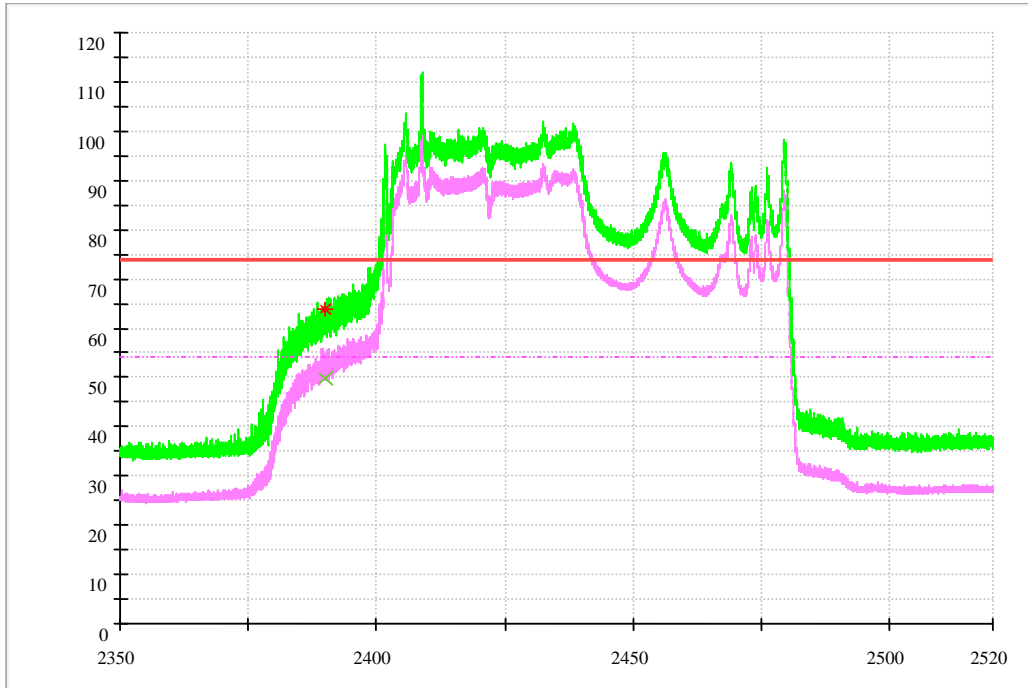

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	49.81	54.00	4.19	150.0	H	226.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	63.75	74.00	10.25	150.0	H	254.0	-10.2

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.2 Channel 9@Ant 1



MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	36.93	54.00	17.07	150.0	H	66.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	63.28	74.00	10.72	150.0	H	46.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

#### 1.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 3 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

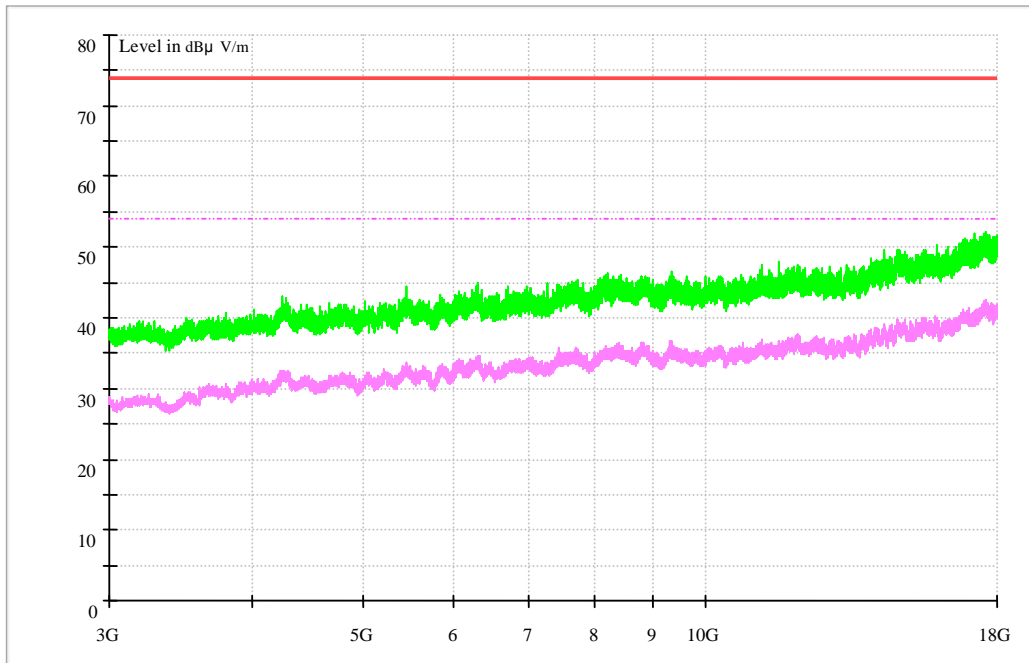




### 1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

## Appendix I: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

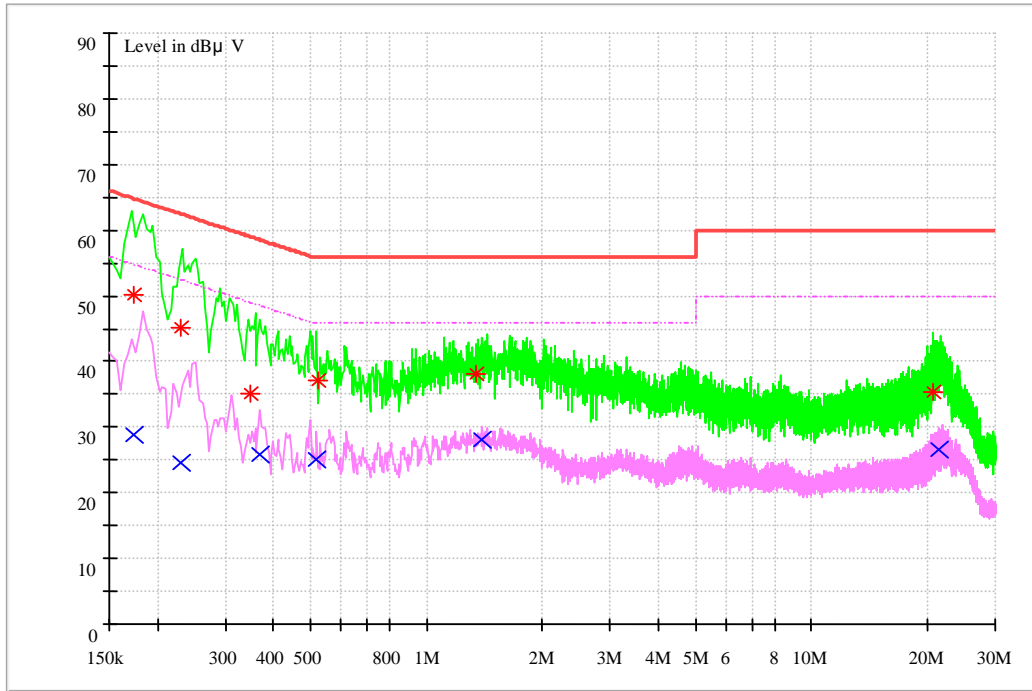

### MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.173618	28.9	54.79	9.7	25.89	N	FLO
0.230501	24.57	52.43	9.7	27.86	N	FLO
0.369678	25.73	48.5	9.7	22.77	N	FLO
0.519706	25.17	46	9.7	20.83	N	FLO
1.393606	28.14	46	9.7	17.86	N	FLO
21.461391	26.49	50	10.2	23.51	N	FLO

### MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.173052	50.2	64.82	9.7	14.62	N	FLO
0.231258	45	62.4	9.7	17.4	N	FLO
0.346847	35.22	59.04	9.7	23.82	N	FLO
0.521797	37.15	56	9.7	18.85	N	FLO



---

---

1.341015	38.14	56	9.7	17.86	N	FLO
20.586554	35.37	60	10.1	24.63	N	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

---

END