



FCC RADIO TEST REPORT

FCC ID : QISLYA-L0C
Equipment : Smartphone
Brand Name : HUAWEI
Model Name : LYA-L0C
Applicant / Manufacturer : Huawei Technologies Co., Ltd.
Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Standard : 47 CFR FCC Part 15.209

The product was received on Aug. 30, 2018, and testing was started from Aug. 31, 2018 and completed on Aug. 31, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Table for Multiple Listing	6
1.3	Testing Applied Standards	8
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Configuration	9
2.2	The Worst Charger Frequencies Configuration	9
2.3	The Worst Case Measurement Configuration.....	9
2.4	Accessories	10
2.5	Support Equipment.....	11
2.6	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	Transmitter Radiated Emissions	12
4	TEST EQUIPMENT AND CALIBRATION DATA	15

APPENDIX A. VERIFICATION DATA

APPENDIX B. TEST PHOTOS



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
-	15.207	AC Power-line Conducted Emissions	N/A	-
3.1	15.209	Transmitter Radiated Emissions	PASS	-
-	15.215(c)	Emission Bandwidth	N/A	-

Note: For other test items, please refer to test report by the applicant.

Reviewed by: **Sam Tsai**

Report Producer: **Ann Hou**



1 General Description

1.1 Information

1.1.1 General Information

Wireless Power Transfer General Information			
Frequency Range	Modulation	Charging Freq. (kHz)	
110.1-148 kHz	ASK	112	
Power Transfer Method	Output power from each primary coil	That may have multiple primary coils	Charging Method
Magnetic induction and only single primary coil coupling secondary coil	<15W	Yes	Client directly contact

Note 1: Field strength performed peak level at 3m.

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas)

1.1.3 Type of EUT

Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other: The EUT place with the platform.

1.1.4 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> AC adapter	<input checked="" type="checkbox"/> Battery	<input type="checkbox"/> From System



1.2 Table for Multiple Listing

The brand/model names in the following table are all refer to the identical product.

Model	LYA-L29	LYA-L0C																						
PCB	The same	The same																						
Frequency-GSM	The same	The same																						
Frequency-WCDMA	The same	The same																						
Frequency-LTE	Different B2/4/5/7/12/17/38/40/41(2545~2655MHz , support AXGP)	Different B2/4/5/7/12/17/38/40/41(2545~2655MHz , support AXGP)/B66																						
4*4 Mimo	Different Support B3 、 B7 、 B1	Different Support B2 、 B7 、 B66(B4) Replace TRI SAW filters of B1/B3/B7 with SAW filters of B2/B66/B7. Replace																						
SIM Card	Dual	Single																						
RF NV parameters	Different	<p>Different The power of LYA-L0C is different from LYA-L29 by change RF NV parameters.</p> <ul style="list-style-type: none"> Down antenna (Primary) <p>① 0mm body Scenario</p> <table border="1"> <thead> <tr> <th></th> <th>WB2</th> <th>WB4</th> <th>LTEB2</th> <th>LTEB4</th> </tr> </thead> <tbody> <tr> <td>reduce</td> <td>0.5dB</td> <td>0.5dB</td> <td>0.5dB</td> <td>1.5dB</td> </tr> </tbody> </table> <p>② 10mm hotspot Scenario</p> <table border="1"> <thead> <tr> <th></th> <th>LTEB4</th> </tr> </thead> <tbody> <tr> <td>reduce</td> <td>0.5dB</td> </tr> </tbody> </table> <ul style="list-style-type: none"> Up antenna (Secondary) Head Scenario <table border="1"> <thead> <tr> <th></th> <th>WB2</th> <th>WB4</th> <th>LTEB2</th> </tr> </thead> <tbody> <tr> <td>rise</td> <td>1dB</td> <td>1dB</td> <td>1dB</td> </tr> </tbody> </table>		WB2	WB4	LTEB2	LTEB4	reduce	0.5dB	0.5dB	0.5dB	1.5dB		LTEB4	reduce	0.5dB		WB2	WB4	LTEB2	rise	1dB	1dB	1dB
	WB2	WB4	LTEB2	LTEB4																				
reduce	0.5dB	0.5dB	0.5dB	1.5dB																				
	LTEB4																							
reduce	0.5dB																							
	WB2	WB4	LTEB2																					
rise	1dB	1dB	1dB																					
Hardware	<p>Different Location ID: Z4102, Z4302, Z4401 Description: B1/3/7 Tri saw filter, 2140MHz.</p> <p>Location ID: Z4103 Description: SAW filter -1960MHz</p>	<p>Different</p> <p>1) Replace TRI SAW filters of B1/B3/B7 with SAW filters of B2/B66/B7. Replace Location ID: Z4102, Z4302, Z4401 Description: B2/B66/B7 Tri saw filter ,2655MHz.</p> <p>2) Delete some chip inductors in Peripheral RF Matching circuits of the diversity circuit, MIMO main circuit, and MIMO diversity circuit. Delete Location ID: L4126 L4127 L4130 L3506 Description: Chip inductor 0.018uH/0.001uH/0.0022uH/0.0039uH</p> <p>3) Delete The circuits related to the B32 frequency band. Delete: Location ID: Z3502, Z4104 Description: B32 saw filter 1474MHz Location ID: C3512, C5401, C5405 Description: Ceramic capacitor 0.033nF Location ID: Z5403 Description: Ceramic filter -1710MHz Location ID: U3503, U4101 Description: RF low noise amplifier -1559~1610MHz</p> <p>4) Replace B3 SAW filter with B2 SAW filter and slight change of Peripheral RF matching circuits. Replace: Location ID: Z4103 Description: SAW filter -1842.5MHz</p> <p>Delete: Location ID: L3502 L3516 L4129 Description: Chip inductor 0.0056uH/0.002uH/0.0075uH Location ID: C3514, C4110 Description: Ceramic capacitor 0.018nF</p>																						



Model	LYA-L29	LYA-L0C
Software	Different	Different
Dimensions	The same	The same
Appearance	The same	The same
main antenna	The same	The same
BT/Wi-Fi antenna	The same	The same
DIV antenna	The same	The same
Supported CA configurations for DL CA	<p>Different</p> <p>support:CA_1A-3A CA_1C-3A CA_1A-3C CA_1A-3A-3A CA_1C-3C CA_1A-3D CA_1C-3D CA_1A-7A-7A CA_1A-32A CA_1A-38A CA_1A-38C CA_1A-40A CA_1A-40C CA_1A-41A CA_1A-41C CA_3A-3A-7A CA_3A-7A-7A CA_3A-3A-7A CA_3A-3A-8A CA_3A-32A CA_3C-32A CA_3A-38A CA_3C-38A CA_3A-38C CA_3C-38C CA_3A-40A CA_3A-40C CA_3A-40D CA_3A-41A CA_7A-7A-8A CA_7A-32A CA_8A-32A CA_20A-32A CA_1A-3A-5A CA_1A-3C-5A CA_1A-3A-7A CA_1C-3A-7A CA_1A-3C-7A CA_1A-3A-3A-7A CA_1A-3A-7C CA_1A-3A-7A-7A CA_1C-3C-7A CA_1A-3A-3A-7A-7A CA_1A-3A-8A CA_1A-3C-8A CA_1A-3A-19A CA_1A-3A-20A CA_1A-3C-20A CA_1A-3A-26A CA_1A-3A-28A CA_1A-3C-28A CA_1A-3A-32A CA_1A-3A-38A CA_1A-3C-38A CA_1A-3A-38C CA_1A-3C-38C CA_1A-28A-40C CA_3A-3A-7A-8A CA_3A-7A-7A-8A CA_3A-3A-7A-7A-8A CA_3A-3A-7A-20A CA_3A-7A-32A CA_3C-7A-32A CA_3A-8A-38A CA_3C-8A-38A CA_3A-20A-32A CA_3A-28A-40A CA_3A-28A-40C CA_3A-28A-40D CA_7A-8A-32A CA_7A-20A-32A CA_1A-3A-7A-8A CA_1A-3C-7A-8A CA_1A-3A-7A-20A CA_1A-3C-7A-20A CA_1A-3A-7A-28A CA_1A-3A-7C-28A CA_1A-3A-7A-32A CA_1A-3A-8A-38A CA_1A-3A-20A-32A CA_1A-3A-28A-40A CA_1A-3A-28A-40C CA_1A-7A-20A-32A CA_3A-7A-20A-32A CA_1A-3A-7A-20A-32A</p> <p>unsupport:CA_66B CA_66C CA_66D CA_2A-2A CA_4A-4A CA_12A-12A CA_66A-66A CA_2A-4A CA_2C-4A CA_2A-4A-4A CA_2A-5A CA_2A-7A CA_2A-7C CA_2A-7A-7A CA_2A-12A CA_2A-2A-12A CA_2A-12B CA_2A-12A-12A CA_2A-17A CA_2A-28A CA_2A-66A CA_2A-2A-66A CA_4A-5A CA_4A-4A-5A CA_4A-7A CA_4A-4A-7A CA_4A-7C CA_4A-7A-7A CA_4A-12A CA_4A-4A-12A CA_4A-12B CA_4A-12A-12A CA_4A-17A CA_4A-28A CA_7A-12A CA_7A-12B CA_7A-12A-12A CA_7A-66A CA_7C-66A CA_7A-66A-66A CA_7C-66A-66A CA_12A-66A CA_12B-66A CA_12A-66A-66A CA_2A-4A-5A CA_2A-4A-7A CA_2A-4A-7C CA_2A-4A-7A-7A CA_2A-4A-12A CA_2A-4A-12A-12A CA_2A-4A-28A CA_2A-7A-12A CA_2A-7A-12B CA_2A-7A-12A-12A CA_2A-7A-66A CA_2A-12A-66A CA_2A-2A-12A-66A CA_2A-12B-66A CA_4A-5A-7A CA_4A-7A-12A CA_4A-7A-12B CA_4A-7A-12A-12A CA_7A-12A-66A CA_7A-12B-66A CA_2A-4A-7A-12A CA_2A-7A-12A-66A CA_2A-7A-12B-66A CA_2A-7A-7A-66A-66A CA_2A-7A-7A-66A CA_2A-7A-66A-66A CA_7A-7A-66A CA_7A-7A-66A-66A CA_2A-66A-66A</p>	<p>Different</p> <p>unsupport:CA_1A-3A CA_1C-3A CA_1A-3C CA_1A-3A-3A CA_1C-3C CA_1A-3D CA_1C-3D CA_1A-7A-7A CA_1A-32A CA_1A-38A CA_1A-38C CA_1A-40A CA_1A-40C CA_1A-41A CA_1A-41C CA_3A-3A-7A CA_3A-7A-7A CA_3A-3A-7A-7A CA_3A-3A-8A CA_3A-32A CA_3C-32A CA_3A-38A CA_3C-38A CA_3A-38C CA_3C-38C CA_3A-40A CA_3A-40C CA_3A-40D CA_3A-41A CA_7A-7A-8A CA_7A-32A CA_8A-32A CA_20A-32A CA_1A-3A-5A CA_1A-3C-5A CA_1A-3A-7A CA_1C-3A-7A CA_1A-3C-7A CA_1A-3A-3A-7A CA_1A-3A-7C CA_1A-3A-7A-7A CA_1C-3C-7A CA_1A-3A-7A-7A CA_1A-3A-8A CA_1A-3C-8A CA_1A-3A-19A CA_1A-3A-20A CA_1A-3C-20A CA_1A-3A-26A CA_1A-3A-28A CA_1A-3C-28A CA_1A-3A-32A CA_1A-3A-38A CA_1A-3C-38A CA_1A-3A-38C CA_1A-3C-38C CA_1A-28A-40C CA_3A-3A-7A-8A CA_3A-7A-7A-8A CA_3A-3A-7A-7A-8A CA_3A-3A-7A-20A CA_3A-7A-32A CA_3C-7A-32A CA_3A-8A-38A CA_3C-8A-38A CA_3A-20A-32A CA_3A-28A-40A CA_3A-28A-40C CA_3A-28A-40D CA_7A-8A-32A CA_7A-20A-32A CA_1A-3A-7A-8A CA_1A-3C-7A-8A CA_1A-3A-7A-20A CA_1A-3C-7A-20A CA_1A-3A-7A-28A CA_1A-3A-7C-28A CA_1A-3A-7A-32A CA_1A-3A-8A-38A CA_1A-3A-20A-32A CA_1A-3A-28A-40A CA_1A-3A-28A-40C CA_1A-7A-20A-32A CA_3A-7A-20A-32A CA_1A-3A-7A-20A-32A</p> <p>support:CA_66B CA_66C CA_66D CA_2A-2A CA_4A-4A CA_12A-12A CA_66A-66A CA_2A-4A CA_2C-4A CA_2A-4A-4A CA_2A-5A CA_2A-7A CA_2A-7C CA_2A-7A-7A CA_2A-12A CA_2A-2A-12A CA_2A-12B CA_2A-12A-12A CA_2A-17A CA_2A-28A CA_2A-66A CA_2A-2A-66A CA_4A-5A CA_4A-4A-5A CA_4A-7A CA_4A-4A-7A CA_4A-7C CA_4A-12A CA_4A-4A-12A CA_4A-12B CA_4A-12A-12A CA_4A-17A CA_4A-28A CA_7A-12A CA_7A-12B CA_7A-12A-12A CA_7A-66A CA_7C-66A CA_7A-66A-66A CA_7C-66A-66A CA_12A-66A CA_12B-66A CA_12A-66A-66A CA_2A-4A-5A CA_2A-4A-7A CA_2A-4A-7C CA_2A-4A-7A-7A CA_2A-4A-12A CA_2A-4A-12A-12A CA_2A-4A-28A CA_2A-7A-12A CA_2A-7A-12B CA_2A-7A-12A-12A CA_2A-7A-66A CA_2A-12A-66A CA_2A-2A-12A-66A CA_2A-12B-66A CA_4A-5A-7A CA_4A-7A-12A CA_4A-7A-12B CA_4A-7A-12A-12A CA_7A-12A-66A CA_7A-12B-66A CA_2A-4A-7A-12A CA_2A-7A-12A-66A CA_2A-7A-12B-66A CA_2A-7A-7A-66A-66A CA_2A-7A-7A-66A CA_2A-7A-66A-66A CA_7A-7A-66A CA_7A-7A-66A-66A CA_2A-66A-66A</p>
Supported CA configurations for UL CA	<p>Different</p> <p>support:CA_3A-20A CA_7A-20A</p>	<p>Different</p> <p>Unsupport:CA_3A-20A CA_7A-20A</p>
Others	NA	NA



1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013
- KDB 680106 D01 RF Exposure Wireless Charging Apps v03

1.4 Testing Location Information

Testing Location		
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.		
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.) TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.		

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated Emission	03CH03-HY	Justin Pan	20.1°C /68%	31/Aug/2018

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
Radio Frequency		$\pm 6.7 \times 10^{-8}$	$\pm 1 \times 10^{-7}$
All emissions, radiated	9 – 150 kHz	± 2.5 dB	± 6 dB
	0.15 – 30 MHz	± 2.3 dB	± 6 dB
	30 – 1000 MHz	± 2.6 dB	± 6 dB
Temperature		± 0.8 °C	± 1 °C
Humidity		± 5 %	± 5 %
DC and low frequency voltages		± 0.9 %	± 3 %

2 Test Configuration of EUT


2.1 The Worst Case Configuration

Modulation Mode
ASK
Wireless charger were performed all charging conditions including variable loading and non-charging operation, the worst mode is full charging loading.



















2.2 The Worst Charger Frequencies Configuration

Modulation Mode	Charger Frequencies (kHz)
ASK	112
Wireless charger frequencies are variable frequency range (110.1-148 kHz) and depend on charging loading. The charging frequency is 112 kHz.	

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Transmitter Radiated Emissions, Emission Bandwidth
Test Condition	Radiated measurement
User Position	<input type="checkbox"/> EUT will be placed in fixed position.
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions.
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Adapter Mode
Modulation Mode	ASK
Orthogonal Planes of EUT	Z Plane
	
Worst Planes of EUT	V

2.4 Accessories

Accessories Information				
AC Adapter 1	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400A00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240Vac~50/60Hz, 1.2 A; O/P: 5V  2A or 9V  2A or 10V  4A		
AC Adapter 2	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400U00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240Vac~50/60Hz, 1.2 A; O/P: 5V  2A or 9V  2A or 10V  4A		
AC Adapter 3	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400E00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240Vac~50/60Hz, 1.2 A; O/P: 5V  2A or 9V  2A or 10V  4A		
AC Adapter 4	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400B00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240Vac~50/60Hz, 1.2 A; O/P: 5V  2A or 9V  2A or 10V  4A		
Battery 1	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HB486486ECW
	Power Rating	Nominal Voltage:  +3.82Vdc Charging Voltage:  +4.4V Rated capacity: 4100mAh	Type	Li-ion Polymer
Battery 2	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HB486486ECW
	Power Rating	Nominal Voltage:  +3.82Vdc Charging Voltage:  +4.4V Rated capacity: 4100mAh	Type	Li-ion Polymer
Battery 3	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HB486486ECW
	Power Rating	Nominal Voltage:  +3.82Vdc Charging Voltage:  +4.4V Rated capacity: 4100mAh	Type	Li-ion Polymer
Earphone 1	Brand Name	Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD.		
	Model Name	MEND1632B729003	Number	22040325
Earphone 2	Brand Name	GoerTek Inc.		
	Model Name	Windy-S	Number	22040325
Earphone 3	Brand Name	Boluo County Quancheng Electronic Co.,ltd.		
	Model Name	1331-3301-6001-TC-088	Number	22040325
Earphone 4	Brand Name	Foster Electric Co.,(GuangZhou)LTD.Sales Dep.		
	Model Name	630276	Number	22040325

USB Cable1	Brand Name	Ningbo Broad Telecommunication Co., Ltd.		
	Model Name	WA0009	Number	4071722
USB Cable2	Brand Name	LUXSHARE Precision Industry Co., Ltd.		
	Model Name	L99UC117-CS-H	Number	4071722
USB Cable3	Brand Name	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.		
	Model Name	330-50465	Number	4071722


Note: Regarding to more detail and other information, please refer to user manual.

2.5 Support Equipment

Support Equipment – Radiated				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Mobile phone	HUAWEI	LYA-L0C	QISLYA-L0C

Note: Support equipment No.1 was provided by customer.

2.6 Test Setup Diagram

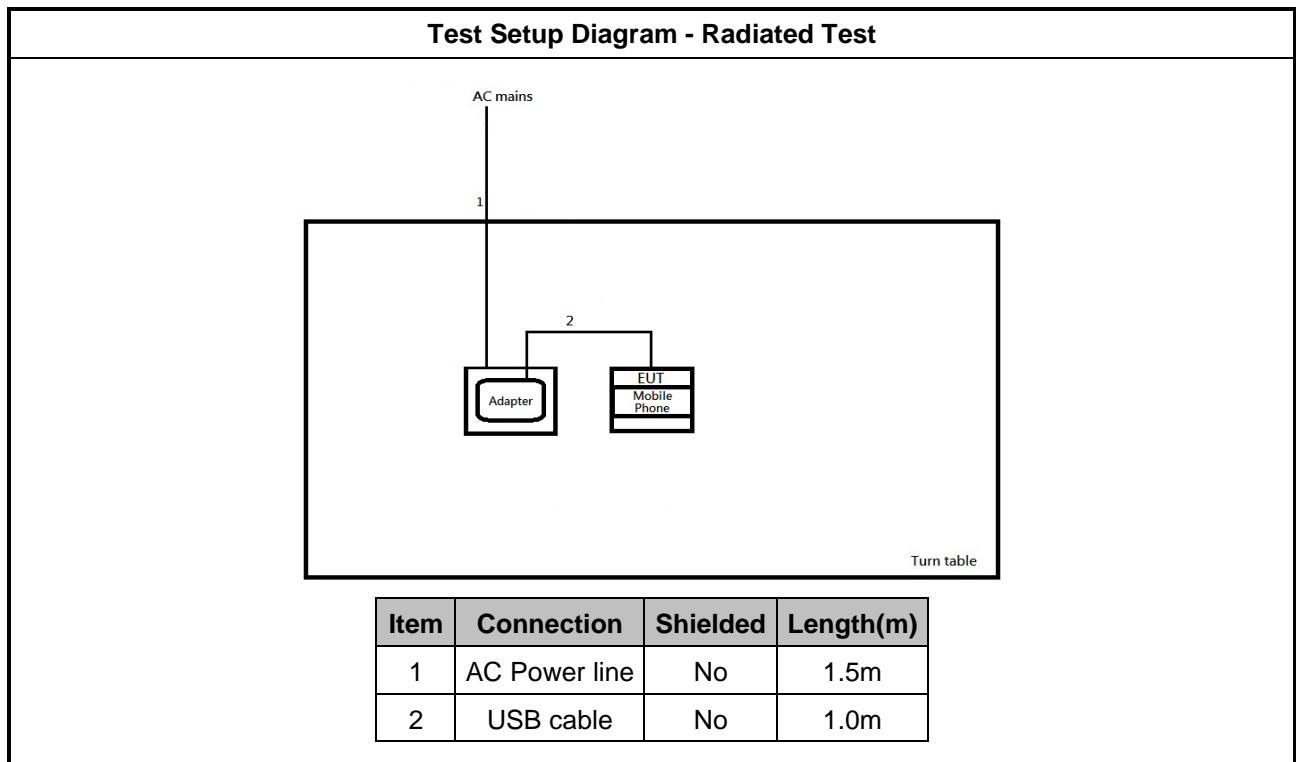

3 Transmitter Test Result

3.1 Transmitter Radiated Emissions

3.1.1 Transmitter Radiated Emissions Limit

Transmitter Radiated Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.

3.1.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.



3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz the frequency bands 110.1-148 kHz measurements employing an average detector and other below 30MHz measurements employing a CISPR quasi-peak detector. Test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.1.4 Test Setup

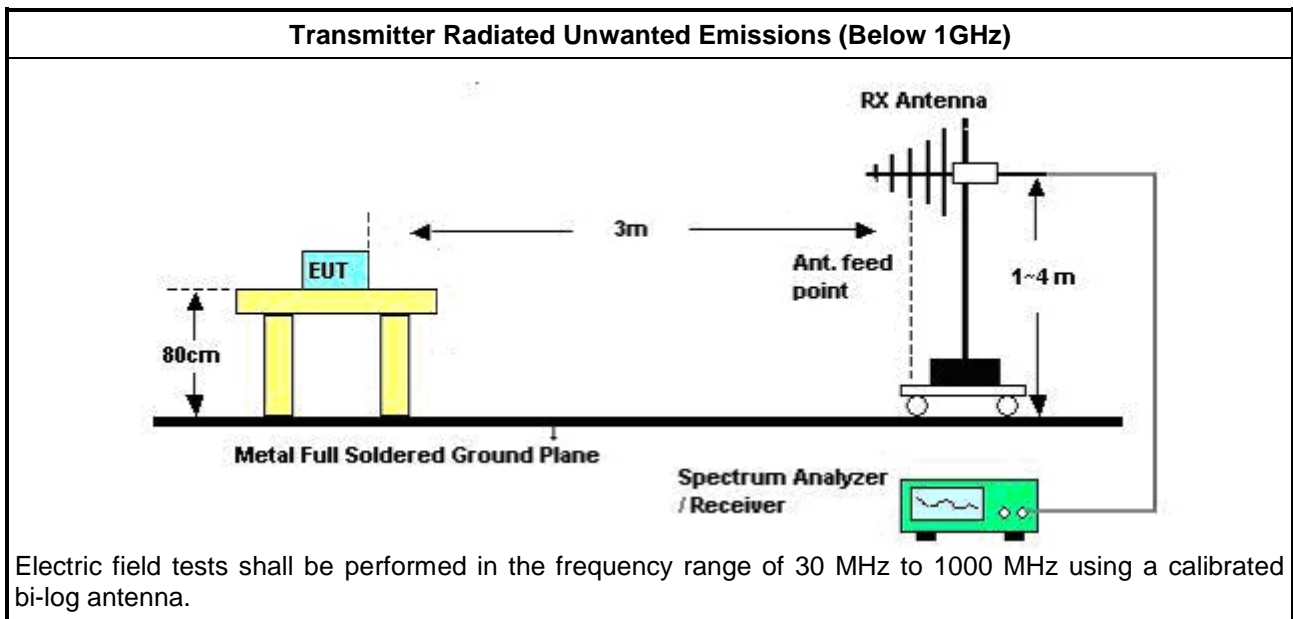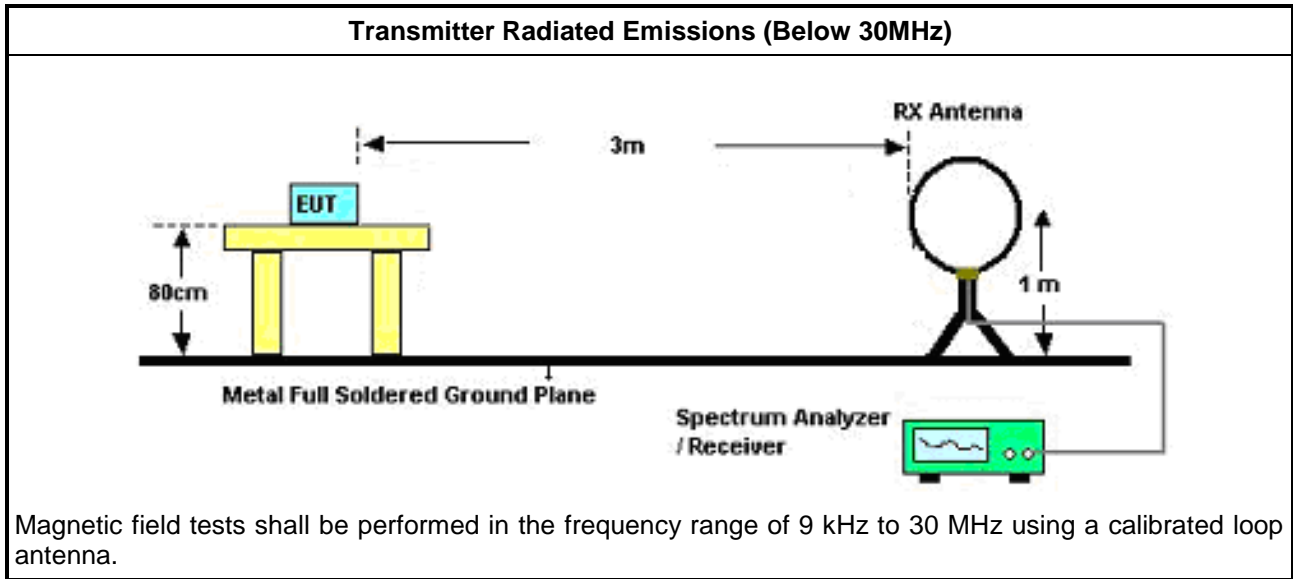

3.1.5 Transmitter Radiated Emissions (Below 30MHz)

The data refer to FR880926AW.

4 Test Equipment and Calibration Data

< Radiated Emission >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	31/Oct/2017	30/Oct/2018
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 18GHz 3m	01/Nov/2017	31/Oct/2018
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	23/Apr/2018	19/Apr/2019
Signal Analyzer	R&S	FSV40	101500	10Hz ~ 40GHz	18/Jul/2018	17/Jul/2019
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	29/Jan/2018	28/Jan/2019
Bilog Antenna	SCHAFFNER	CBL 6112B	2723	30MHz ~ 1GHz	09/Sep/2017	08/Sep/2018
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	28/Mar/2018	27/Mar/2019