



FCC RF Test Report

Product Name: Smart Phone

Model Number: : MAR-LX1A

Report No.: SYBH(Z-RF)20190219030002-2002

FCC ID : QISMAR-LX1A

| Autherized | APPROVED (Lab Manager) | PREPARED (Test Engineer) |
|------------|---------------------------|-----------------------------|
| BY | He Hao | Tao Ming |
| DATE | 2019-03-15 | 2019-03-15 |

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C
Telephone: +86 769 23830808 Fax: +86 769 23837628

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
2. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003, and the ISED# is 21741.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
9. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).

MODIFICATION RECORD

| No. | Report No | Modification Description |
|-----|-----------------------------------|--------------------------|
| 1 | SYBH(Z-RF) 20190219030002-2002 | First release. |

DECLARATION

| Type | Description |
|------------------------------------|---|
| Multiple Models Applications | <input checked="" type="checkbox"/> The present report applies to single model. <input type="checkbox"/> The present report applies to several models. The practical measurements are performed with the model . The present report only presents the worst test case of all modes, see relevant test results for detailed. |

1 Table of contents

| | | |
|-----|---|----|
| 1 | Table of contents | 4 |
| 2 | General Information | 5 |
| 2.1 | Test standard/s | 5 |
| 2.2 | Test Environment | 5 |
| 2.3 | Test Laboratories | 5 |
| 2.4 | Applicant and Manufacturer | 6 |
| 2.5 | Application details | 6 |
| 3 | Test Summary | 6 |
| 4 | Description of the Equipment under Test (EUT) | 7 |
| 4.1 | General Description | 7 |
| 4.2 | EUT Identity | 7 |
| 4.3 | Technical Description | 9 |
| 5 | General Test Conditions / Configurations | 10 |
| 5.1 | EUT Configurations | 10 |
| 5.2 | Antenna requirements | 11 |
| 5.3 | Description of tests | 12 |
| 5.4 | Test Setups | 14 |
| 5.5 | Test Conditions | 15 |
| 6 | Main Test Instruments | 17 |
| 7 | Measurement Uncertainty | 18 |
| 8 | Appendixes | 19 |

2 General Information

2.1 Test standard/s

| | |
|-----------------|---|
| Applied Rules : | 47 CFR FCC Part 2, Subpart J 47 CFR FCC Part 15, Subpart C |
| Test Method : | FCC KDB 558074 D01 DTS Meas Guidance v05r01 ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. |

2.2 Test Environment

| | | | |
|----------------------------|----------------|----------|----------------------------------|
| Temperature : | TN | 15 to 30 | °C during room temperature tests |
| Ambient Relative Humidity: | 20 to 85 % | | |
| Atmospheric Pressure: | Not applicable | | |
| Power supply : | VL | 3.6 | V |
| | VN | 3.8 | V DC by Battery |
| | VH | 4.35 | V |

NOTE 1: 1) VN= nominal voltage, VL= low extreme test voltage, VH= High extreme test voltage;

TN= normal temperature, TL= low extreme test temperature, TH= High extreme test temperature.

NOTE 2: The values used in the test report may be stringent than the declared.

2.3 Test Laboratories

| | |
|------------------------------|--|
| Test Location 1 : | RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD. |
| Address of Test Location 1 : | No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C |

2.4 Applicant and Manufacturer

| | |
|----------------|---|
| Company Name : | HUAWEI TECHNOLOGIES CO., LTD |
| Address : | Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C |

2.5 Application details

| | |
|-------------------------|------------|
| Date of Receipt Sample: | 2019-03-04 |
| Start of test: | 2019-03-04 |
| End of test: | 2019-03-15 |

3 Test Summary

| Test Item | FCC Rule No. | Requirements | Test Result | Verdict | Testing location |
|--|--------------------|---|-------------|---------|------------------|
| 20dB Emission Bandwidth (EBW) | 15.247(a)(1) | No limit. | Appendix A | Pass | Test Location 1 |
| Carrier Frequency Separation | 15.247(a)(1) | $\geq \text{MAX} \{25\text{kHz}, \text{IIF}\{\text{output power} \leq 125\text{mW}, 2/3 * 20\text{dB EBW}, 20\text{dB EBW}\}\}$. | Appendix B | Pass | Test Location 1 |
| Number of Hopping Channel | 15.247(a)(1) (iii) | ≥ 15 channels. | Appendix C | Pass | Test Location 1 |
| Time of Occupancy (Dwell Time) | 15.247(a)(1) (iii) | $< 0.4\text{s}$ within a period of $(0.4\text{s} * \text{hopping number})$. | Appendix D | Pass | Test Location 1 |
| Maximum Peak Output Power | 15.247(b)(1) | FCC: Conducted $< 1\text{ W}$ if using ≥ 75 non-overlapping channels. | Appendix E | Pass | Test Location 1 |
| Band edge spurious emission | 15.247(d) | $< -20\text{ dBm}/100\text{ kHz}$ if total peak power \leq power limit. | Appendix F | Pass | Test Location 1 |
| Conducted RF Spurious Emission | | | Appendix G | Pass | Test Location 1 |
| NOTE: The transmitter has an integral PCB loop antenna that is enclosed within the housing of the EUT and meets the requirements of FCC 15.203 | | | | | |

4 Description of the Equipment under Test (EUT)

4.1 General Description

MAR-LX1A is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The UMTS frequency band is B1 and B2 and B4 and B5 and B8. The LTE frequency band is B1 and B3 and B4 and B7 and B8 and B20 and B38. The Mobile Phone implements such functions as RF signal receiving/transmitting, GSM/WCDMA/LTE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides one micro SD card interface (it can also used as SIM card interface), earphone port (to provide voice service) and one SIM card interface. MAR-LX1A are dual SIM and single SIM smart phones, Single SIM delete SIM only by software. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Note: Only Bluetooth test data included in this report.

4.2 EUT Identity







NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

4.2.1 Board

| Board | | |
|-------------|----------------------------|------------------|
| Description | Software Version | Hardware Version |
| Main Board | 9.0.1.118(SP1C900E118R1P6) | HL3MARLM |

4.2.2 Sub- Assembly

| Sub-Assembly | | | |
|-------------------|--------------|-------------------------------|---|
| Sub-Assembly Name | Model | Manufacturer | Description |
| Adapter | HW-090200EH0 | Huawei Technologies Co., Ltd. | Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V $\overline{\text{---}}$ 2A OR 9V $\overline{\text{---}}$ 2A |
| Adapter | HW-090200BH0 | Huawei Technologies Co., Ltd. | Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V $\overline{\text{---}}$ 2A OR 9V $\overline{\text{---}}$ 2A |
| Adapter | HW-090200UH0 | Huawei Technologies | Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V $\overline{\text{---}}$ 2A OR 9V $\overline{\text{---}}$ 2A |

| Sub-Assembly | | | |
|-------------------|--------------|-------------------------------|--|
| Sub-Assembly Name | Model | Manufacturer | Description |
| | | Co., Ltd. | |
| Adapter | HW-059200EHQ | Huawei Technologies Co., Ltd. | Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A |
| Adapter | HW-090200UH1 | Huawei Technologies Co., Ltd. | Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A |
| Battery | HB356687ECW | Huawei Technologies Co., Ltd. | Rated capacity: 3240mAh Nominal Voltage:  +3.82V Charging Voltage:  +4.40V |

4.3 Technical Description

| Characteristics | Description | |
|-----------------------|---|---|
| TX/RX Operating Range | 2400-2483.5 MHz band | $f_c = 2402 \text{ MHz} + N * 1 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 0 to 78. |
| Modulation Type | Carrier | Frequency Hopping Spread Spectrum (FHSS) |
| | Digital | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Emission Designator | GFSK: 950KFXD. $\pi/4$ -DQPSK: 1M27GXD 8DPSK: 1M27GXD | |
| Bluetooth Power Class | Class 1 | |
| Antenna | Description | Isotropic Antenna |
| | Type | <input checked="" type="checkbox"/> Integral <input type="checkbox"/> External <input type="checkbox"/> Dedicated |
| | Ports | <input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3 |
| | Gain | -2.4 dBi (per antenna port, max.) |
| | Remark | When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above. |
| Power Supply | Type | <input type="checkbox"/> External DC mains, <input checked="" type="checkbox"/> Battery, <input type="checkbox"/> AC/DC Adapter, <input type="checkbox"/> Powered over Ethernet (PoE). <input type="checkbox"/> Other |

5 General Test Conditions / Configurations

5.1 EUT Configurations

5.1.1 General Configurations

| Configuration | Description |
|---------------------|--|
| Test Antenna Ports | Until otherwise specified, - All TX tests are performed at all TX antenna ports of the EUT, and - All RX tests are performed at all RX antenna ports of the EUT. |
| Multiple RF Sources | Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements. |

5.1.2 Customized Configurations

| # EUT Conf. | Signal Description | Operating Frequency |
|---------------|--|----------------------|
| TM1_DH5_Hop | GFSK modulation, package type DH5, hopping on. | --- |
| TM1_DH5_Ch0 | GFSK modulation, package type DH5, hopping off. | Ch No. 0 / 2402 MHz |
| TM1_DH5_Ch39 | GFSK modulation, package type DH5, hopping off. | Ch No. 39 / 2441 MHz |
| TM1_DH5_Ch78 | GFSK modulation, package type DH5, hopping off. | Ch No. 78 / 2480 MHz |
| TM2_2DH5_Hop | $\pi/4$ -DQPSK modulation, package type 2DH5, hopping on. | --- |
| TM2_2DH5_Ch0 | $\pi/4$ -DQPSK modulation, package type 2DH5, hopping off. | Ch No. 0 / 2402 MHz |
| TM2_2DH5_Ch39 | $\pi/4$ -DQPSK modulation, package type 2DH5, hopping off. | Ch No. 39 / 2441 MHz |
| TM2_2DH5_Ch78 | $\pi/4$ -DQPSK modulation, package type 2DH5, hopping off. | Ch No. 78 / 2480 MHz |
| TM3_3DH5_Hop | 8DPSK modulation, package type 3DH5, hopping on. | --- |
| TM3_3DH5_Ch0 | 8DPSK modulation, package type 3DH5, hopping off. | Ch No. 0 / 2402 MHz |
| TM3_3DH5_Ch39 | 8DPSK modulation, package type 3DH5, hopping off. | Ch No. 39 / 2441 MHz |
| TM3_3DH5_Ch78 | 8DPSK modulation, package type 3DH5, hopping off. | Ch No. 78 / 2480 MHz |

5.2 Antenna requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antennas of the MAR-LX1A are **permanently attached**.

There are no provisions for connection to an external antenna.

Conclusion:

The **Smart Phone FCC ID**: QISMAR-LX1A unit complies with the requirement of §15.203.

Ch. Frequency (MHz)

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 00 | 2402 |
| . | . |
| . | . |
| 39 | 2441 |
| . | . |
| . | . |
| 78 | 2480 |

Frequency/ Channel Operations

5.3 Description of tests

5.3.1 Bandwidth measurement

- (a) Connect EUT test port to universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measuring frequency number, finally test the bandwidth with universal communication tester.

5.3.2 Carrier frequency separation measurement

- (a) Connect EUT test port to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.

5.3.3 Number of hopping channel

- (a) Connect EUT test port to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

5.3.4 Time of occupancy

- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on frequency hopping function.
- (c) Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 1 MHz, then get the time domain measured diagram. and set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- (d) Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz, and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- (e) Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts

5.3.5 Peak output power

- (a) Connect EUT test port to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

5.3.6 Band edge spurious emission

- (a) Connect EUT test port to spectrum analyzer and universal communication tester
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- (c) Then set the EUT to transmit at high, low frequency and measure the conducted band edge spurious separately.
- (d) Switch on the frequency hopping function, and repeat above measurement.


5.3.7 Conducted RF Spurious

- (a) Connect EUT test port to spectrum analyzer and universal communication tester
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted spurious separately.
- (d) Switch on the frequency hopping function, and repeat the above measurement.

5.4 Test Setups

5.4.1 Test Setup 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by Bluetooth System Simulator and/or PC/software to emit the specified signals for the purpose of measurements.

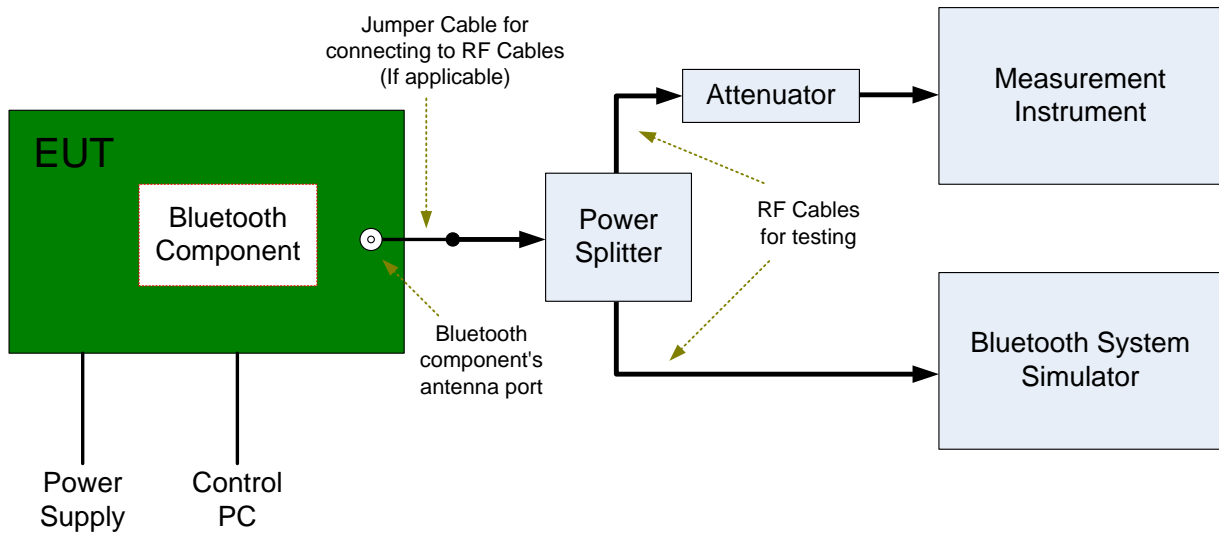

5.5 Test Conditions

| Test Case | Test Conditions | |
|-------------------------------------|-----------------|--|
| | Configuration | Description |
| 20dB Emission Bandwidth (EBW) | Meas. Method | C63.10 §7.8.7 |
| | Test Env. | TN/VN |
| | Test Setup | Test Setup 1 |
| | EUT Conf. | TM1_DH5_Ch0, TM1_DH5_Ch39, TM1_DH5_Ch78, TM2_2DH5_Ch0, TM2_2DH5_Ch39, TM2_2DH5_Ch78, TM3_3DH5_Ch0, TM3_3DH5_Ch39, TM3_3DH5_Ch78. |
| Carrier Frequency Separation | Meas. Method | C63.10 §7.8.2 |
| | Test Env. | TN/VN |
| | Test Setup | Test Setup 1 |
| | EUT Conf. | TM1_DH5_Hop, TM2_2DH5_Hop, TM3_3DH5_Hop. |
| Number of Hopping Channel | Meas. Method | C63.10 §7.8.3 |
| | Test Env. | TN/VN |
| | Test Setup | Test Setup 1 |
| | EUT Conf. | TM1_DH5_Hop, TM2_2DH5_Hop, TM3_3DH5_Hop. |
| Time of Occupancy (Dwell Time) | Meas. Method | C63.10 §7.8.4 |
| | Test Env. | TN/VN |
| | Test Setup | Test Setup 1 |
| | EUT Conf. | TM1_DH5_Ch39, TM2_2DH5_Ch39, TM3_3DH5_Ch39. |
| Maximum Peak Conducted Output Power | Meas. Method | C63.10 §7.8.5 |
| | Test Env. | TN/VN |
| | Test Setup | Test Setup 1 |
| | EUT Conf. | TM1_DH5_Ch0, TM1_DH5_Ch39, TM1_DH5_Ch78, TM2_2DH5_Ch0, TM2_2DH5_Ch39, TM2_2DH5_Ch78, TM3_3DH5_Ch0, TM3_3DH5_Ch39, TM3_3DH5_Ch78. |
| Band edge spurious emission | Meas. Method | C63.10 §7.8.6 |
| | Test Env. | TN/VN |
| | Test Setup | Test Setup 1 |
| | EUT Conf. | TM1_DH5_Ch0, TM1_DH5_Ch78, TM2_2DH5_Ch0, TM2_2DH5_Ch78, TM3_3DH5_Ch0, TM3_3DH5_Ch78. |
| Conducted RF Spurious Emission | Meas. Method | C63.10 §7.8.8 |
| | Test Env. | TN/VN |

| Test Case | Test Conditions | |
|-----------|-----------------|--|
| | Configuration | Description |
| | Test Setup | Test Setup 1 |
| | EUT Conf. | TM1_DH5_Ch0, TM1_DH5_Ch39, TM1_DH5_Ch78, TM2_2DH5_Ch0, TM2_2DH5_Ch39, TM2_2DH5_Ch78, TM3_3DH5_Ch0, TM3_3DH5_Ch39, TM3_3DH5_Ch78. |

6 Main Test Instruments

This table gives a complete overview of the RF measurement equipment.

Devices used during the test described are marked

| <input checked="" type="checkbox"/> Main Test Equipments(BT/WIFI test system) | | | | | | |
|---|--------------------------------------|--------------|----------|----------------|------------|------------|
| Marked | Equipment Name | Manufacturer | Model | Serial Number | Cal Date | Cal-Due |
| <input type="checkbox"/> | JS1120-3 BT/WIFI test system | JS Tonscend | JS0806-2 | 188060102 | 2018/05/30 | 2019/05/30 |
| <input type="checkbox"/> | Power Detecting & Samplig Unit | R&S | OSP-B157 | 101429 | 2018/07/23 | 2019/07/23 |
| <input type="checkbox"/> | Power Sensor | R&S | NRP2 | 103085/106211 | 2018/05/17 | 2019/05/17 |
| <input type="checkbox"/> | DC Power Supply | KEITHLEY | 2303 | 1342889 | 2018/10/24 | 2019/10/24 |
| <input type="checkbox"/> | DC Power Supply | KEITHLEY | 2303 | 000500E | 2018/05/21 | 2019/05/21 |
| <input type="checkbox"/> | DC Power Supply | KEITHLEY | 2303 | 000381E | 2018/05/21 | 2019/05/21 |
| <input type="checkbox"/> | DC Power Supply | KEITHLEY | 2303 | 000510E | 2018/05/21 | 2019/05/21 |
| <input type="checkbox"/> | Temperature Chamber | WEISS | WKL64 | 56246002940010 | 2018/10/24 | 2019/10/24 |
| <input checked="" type="checkbox"/> | Spectrum Analyzer | Agilent | N9030A | MY51380032 | 2018/07/23 | 2019/07/23 |
| <input type="checkbox"/> | Spectrum Analyzer | Agilent | N9030A | MY49431698 | 2018/07/23 | 2019/07/23 |
| <input type="checkbox"/> | Spectrum Analyzer | Keysight | N9040B | MY57212529 | 2018/06/28 | 2019/06/28 |
| <input type="checkbox"/> | Signal Analyzer | R&S | FSQ31 | 200021 | 2018/07/23 | 2019/07/23 |
| <input type="checkbox"/> | Signal Analyzer | R&S | FSU26 | 201069 | 2018/11/2 | 2019/11/2 |
| <input type="checkbox"/> | Universal Radio Communication Tester | R&S | CMW500 | 164699 | 2018/03/15 | 2019/03/15 |
| <input type="checkbox"/> | Universal Radio Communication Tester | R&S | CMW500 | 159302 | 2018/07/23 | 2019/07/23 |
| <input checked="" type="checkbox"/> | Wireless Communication Test set | Agilent | N4010A | MY49081592 | 2018/07/23 | 2019/07/23 |
| <input checked="" type="checkbox"/> | Signal generator | Agilent | E8257D | MY51500314 | 2018/04/27 | 2019/04/27 |
| <input type="checkbox"/> | Signal generator | Agilent | E8257D | MY49281095 | 2018/07/23 | 2019/07/23 |
| <input type="checkbox"/> | Vector Signal Generator | R&S | SMW200A | 103447 | 2018/05/31 | 2019/05/31 |
| <input type="checkbox"/> | Vector Signal Generator | R&S | SMU200A | 104162 | 2018/07/23 | 2019/07/23 |

7 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

| Test Item | | Extended Uncertainty |
|-------------------------------|-------------------------|---|
| Transmit Output Power Data | Power [dBm] | U = 0.39 dB |
| Bandwidth | Magnitude [%] | U=7% |
| Band Edge Compliance | Disturbance Power [dBm] | U = 0.9 dB |
| Spurious Emissions, Conducted | Disturbance Power [dBm] | 20MHz~3.6GHz: U=0.88dB 3.6GHz~8.4GHz: U=1.08dB 8.4GHz~13.6GHz: U=1.24dB 13.6GHz~22GHz: U=1.34dB 22GHz~26.5GHz: U=1.36dB |
| Frequency Stability | Frequency Accuracy [Hz] | U=41.58Hz |
| Duty Cycle | Duty Cycle [%] | U=±2.06 % |

8 Appendixes

| Appendix No. | Description |
|----------------------------------|------------------------|
| SYBH(Z-RF) 20190219030002-2002-A | Appendix for Bluetooth |

END