



FCC RF Test Report

Product Name: Smart Phone

Model Number: POT-LX1

Report No.: SYBH(Z-RF)20180912013001-2006

FCC ID: QISPOT-LX1

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang
District, Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
2. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
3. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named "Global Compliance and Testing Center of Huawei Technologies Co., Ltd", the both names have coexisted since 2009.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
 Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt Sample: 2018-10-08
Start Date of Test: 2018-10-09
End Date of Test: 2018-11-05

Test Result: Pass

Approved by Senior	2018-11-05	He Hao	<u>He Hao</u>
Engineer:	Date	Name	Signature

Prepared by:	2018-11-05	ZhouLingbo	<u>ZhouLingbo</u>
	Date	Name	Signature

CONTENT

1	General Information.....	5
1.1	Applied Standard.....	5
1.2	Test Location.....	5
1.3	Test Environment Condition.....	5
2	Description of the Equipment under Test (EUT).....	6
2.1	General Description	6
2.2	EUT Identity	6
3	General Test Conditions / Configurations.....	7
3.1	Mode of Operation:	7
3.2	Antenna Assembles Profiles	7
3.3	Power Supply.....	7
4	U-NII DFS RULE REQUIREMENTS.....	7
4.1	WORKING MODES ANF REQUIRED TEST ITEMS	7
4.2	Requirements.....	8
4.3	DFS Detection Thresholds.....	9
4.4	Response Requirements.....	10
4.5	Parameters of DFS Test Signals.....	11
4.6	Procedure	13
5	Test Equipment	15
6	TEST RESULTS.....	16
6.1	SUMMARY OF TEST RESULT.....	16
7	Measurement Uncertainty.....	25



1 General Information

1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J
47 CFR FCC Part 15, Subpart E

Test Method: FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices

1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.
Address: No.2 New City Avenue Songshan Lake Sci. &Tech. Industry Park, Dongguan, Guangdong,
P.R.C

1.3 Test Environment Condition

Temperature: 15 to 30 °C (Ambient)
Relative Humidity: 20 to 85 % (Ambient)
Atmospheric Pressure: Not applicable

2 Description of the Equipment under Test (EUT)

2.1 General Description

POT-LX1 is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency band includes GSM850, GSM900, DCS1800 and PCS1900. The UMTS frequency band is band I, band II, band V and band VIII. The LTE frequency band is band 1, band 3, band 7, band 8, band 20. The LTE frequency band for intra-band carrier aggregation downlink operation band is CA_1C and CA_3C and CA_7C and CA_3A_3A. The LTE frequency band for inter-band carrier aggregation downlink operation band is CA_3C_7A and CA_3C_20C and CA_7C_20C. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides one micro SD card interface (it can also used as SIM card interface), earphone port (to provide voice service) and one SIM card interface. POT-LX1 is dual SIM smart phone. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Note1: Only 5G WIFI DFS test data included in this report.





2.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.2.1 Board

Board		
Description	Hardware Version	Software Version
Main Board	HL3POTM	5.0.1.50M(SP2C900E61R1P9)

2.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	HW-050200U01	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A
Adapter	HW-050200U02	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A
Li-Polymer Battery	HB396286ECW	Huawei Technologies Co.,Ltd	Rated capacity: 3320mAh Nominal Voltage:  +3.82V Charging Voltage:  +4.40V

3 General Test Conditions / Configurations

3.1 Mode of Operation:



Characteristics	Description
TX/RX Operating Band	5250 MHz to 5350 MHz, 5470 MHz to 5725 MHz
Operation Mode	<input type="checkbox"/> Master, <input checked="" type="checkbox"/> Slave without radar detection, <input type="checkbox"/> Slave with radar detection
IEEE 802.11 WLAN Mode Supported	802.11A: Supported 802.11N: Supported 802.11AC: Supported
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Modulation Type	BPSK/QPSK/16QAM/64QAM (OFDM).

3.2 Antenna Assemblies Profiles

NOTE: When the EUT is put into service, the Antenna Gain should NOT exceed the value used in following table.

Characteristics	Description
Antenna Type	<input checked="" type="checkbox"/> Integrated, <input type="checkbox"/> External
Antenna Ports	1
Smart Antenna Systems	SISO
Antenna Gain (dBi)	-0.3
Remark	---

3.3 Power Supply

Specification	Description
Power Supply Type	AC/DC Adapter
Input to EUT	DC Voltage Nominal:  3.82 V DC Voltage Range:  3.6 V to 4.4 V

4 U-NII DFS RULE REQUIREMENTS

4.1 WORKING MODES ANF REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately.

Table 1. Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes

Requirement	Operational Mode		
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2. Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

4.2 Requirements

Per FCC KDB 905462 D02 the following are the requirements for Client Devices:

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes.

Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

4.3 DFS Detection Thresholds

Table 3 below provides the *DFS Detection Thresholds* for *Master Devices* as well as *Client Devices* incorporating *In-Service Monitoring*.

Table3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1 and 2)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density <10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will Ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3:EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

4.4 Response Requirements

Table 4 provides the response requirements for *Master* and *Client Devices* incorporating DFS.

Table4. DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

4.5 Parameters of DFS Test Signals

As the EUT is a Client Device with no Radar Detection only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time. Table 5 lists the parameters for the Short Pulse Radar Waveforms. A plot of the Radar Pulse Type 0 used for testing is included in this report.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	6 sec 1 360 Roundup 19 10 PRI	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6. Parameters for Long Pulse Radar Waveforms

Radar Type	Pulse Width (μ sec)	Chirp Width (MHz)	PRI (μ sec)	Number of Pulses per <i>Burst</i>	Number of <i>Bursts</i>	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50 -100	5 -20	1000 -2000	1 -3	8 -20	80%	30

Table 7. Parameters for Frequency Hopping Radar Waveforms

Radar Type	Pulse Width (μ sec)	PRI (μ sec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

4.6 Procedure

The FCC KDB 905462 D02 describes a radiated test setup and a conducted test setup. A conducted test setup was used for this testing. Figure 1 shows the typical test setup.

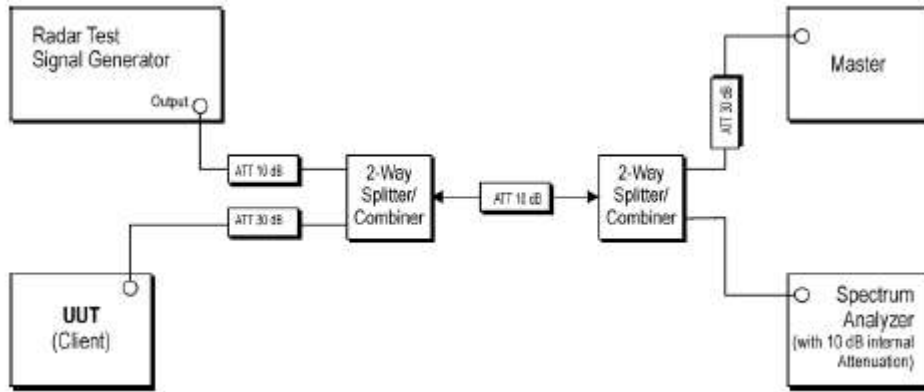


Figure 1. Test Setup for DFS

1. The radar pulse generator is setup to provide a pulse at the frequency that the Master and Client are operating. A Type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
 2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at a level of approximately -64dBm at the antenna of the Master device.
 3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the Traffic and the occurrence of the radar pulse.
 4. The Client Device (EUT) is set up per the diagram in Figure 1 and communications between the Master device and the Client is established.
 5. The MPEG file specified by the FCC (*"6 ½ Magic Hours"*) is streamed from the "file computer" through The Master to the Slave Device and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network.
 6. The real time spectrum analyzer is set to record a 13sec window to any transmissions occurring up to and after 10sec.
 7. The system is again setup and the monitoring time is shortened in order to capture the Channel Closing Transmission Time. This time is measured to insure that the Client ceases transmission within 200ms and the aggregate of emissions occurring after 200ms up to 10 sec do not exceed 60ms.
- (Note: the channel may be different since the Master and Client have changed channels due to the



detection of the initial radar pulse.)

8. Monitor the UUT for more than 30 minutes following Channel Closing Transmission Time if radar detection occurs to verify that the UUT does not resume any transmissions on this Channel.



5 Test Equipment

Equipment	Model	Manufacturer	S/N	Cal Date	Cal- Due
Vector Signal Generator	R&S	SMW200A	103447	2018/05/31	2019/05/31
Spectrum Analyzer	Agilent	N9030A	MY49431698	2018/7/23	2019/7/23
Notebook Computer	Hewlett Packard	Elite Book 840	5CG53648N9	unshielded	unshielded
AP	Netgear	R7000P (FCC ID :PY316200351)	52917474A0653	unshielded	unshielded



6 TEST RESULTS

6.1 SUMMARY OF TEST RESULT

FCC Rule No.	Test Parameter	Remarks	Pass/Fail
15.407(h)	DFS Detection Threshold	No Applicable	N/A
15.407(h)	Channel Availability Check time	No Applicable	N/A
15.407(h)	Channel Move time	Applicable	Pass
15.407(h)	Channel Closing Transmission Time	Applicable	Pass
15.407(h)	Non-Occupancy Period	Applicable	Pass
15.407(h)	Uniform Spreading	No Applicable	N/A
15.407(h)	U-NII Detection Bandwidth	No Applicable	N/A

6.1.1 TEST MODE: DEVICE OPERATING IN MASTER MODE

The EUT is slave equipment, it need a master device when testing.

Master with injection at the Master. (Radar Test Waveforms are injected into the Master)

6.1.2 DFS DETECTION THRESHOLD


The radar signal was the same as the transmitted channels, and injected into the antenna port of AP(master) for measuring the channel closing transmission time and channel move time.


For detection threshold level of -64dBm ,the test level is lower than required level for 1dB,hence it provides margin to the limit and master antenna gain is 1.8 dBi, so required detection threshold is -63.2dBm ($=-65+1.8$) 。

6.1.2.1 Test Result


TestMode	Channel	Radar Type	Result	Limit[dbm]	Verdict
11A	5320	Type0	-63.50	-63.2	PASS
	5700	Type0	-63.51	-63.2	PASS
11N40SISO	5310	Type0	-63.64	-63.2	PASS
	5670	Type0	-63.76	-63.2	PASS
11AC80SISO	5290	Type0	-63.71	-63.2	PASS
	5530	Type0	-63.53	-63.2	PASS

6.1.2.2 Test Graphs

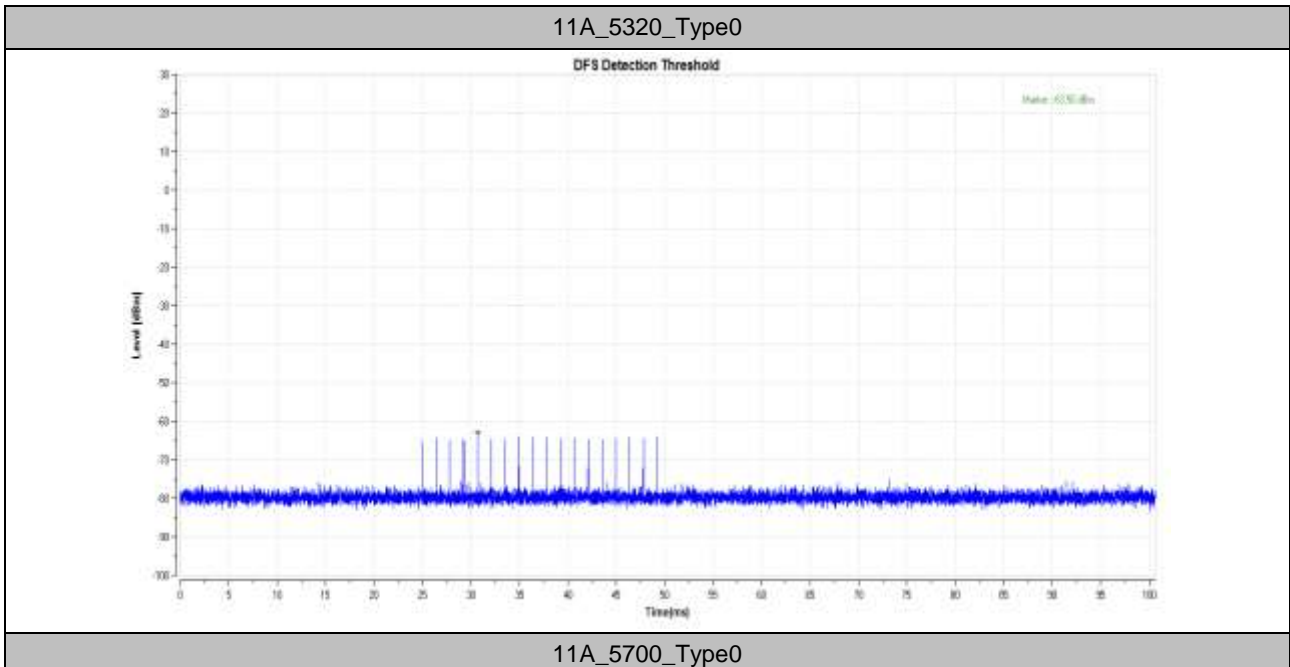


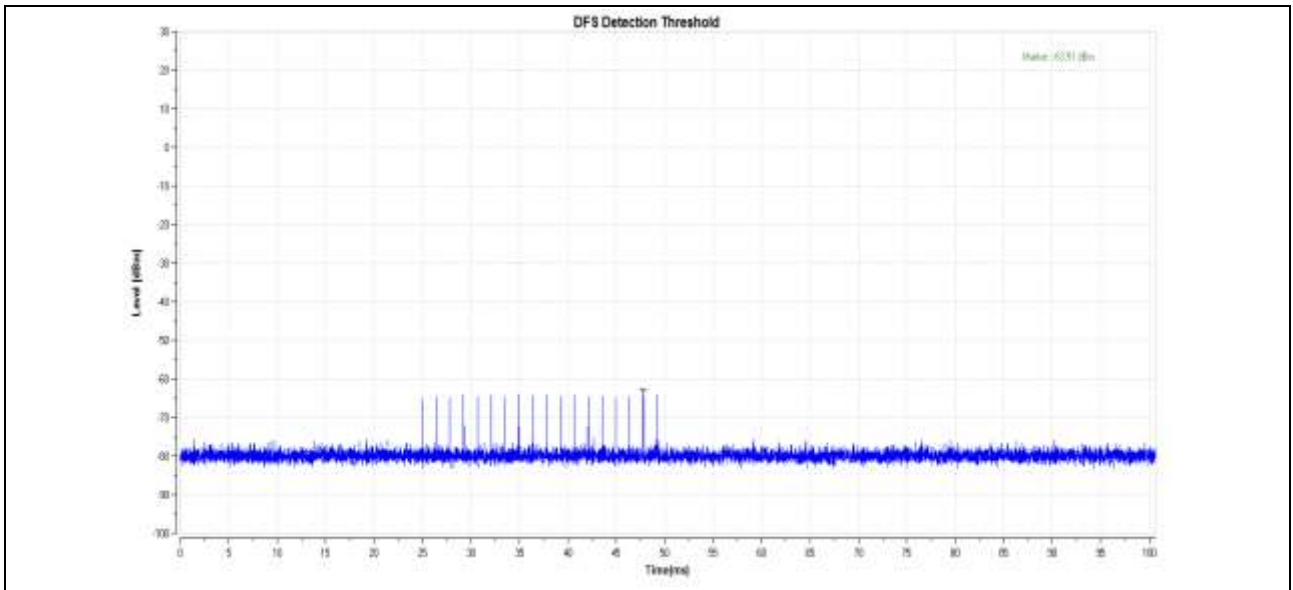


11N40SISO_5310_Type0

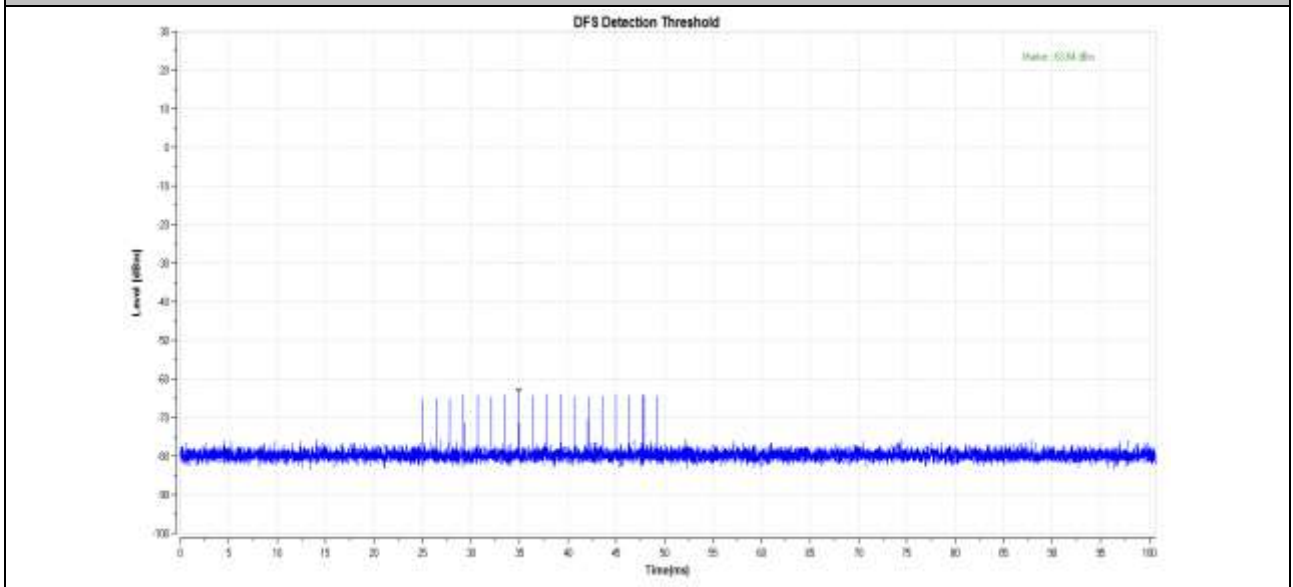


11N40SISO_5670_Type0

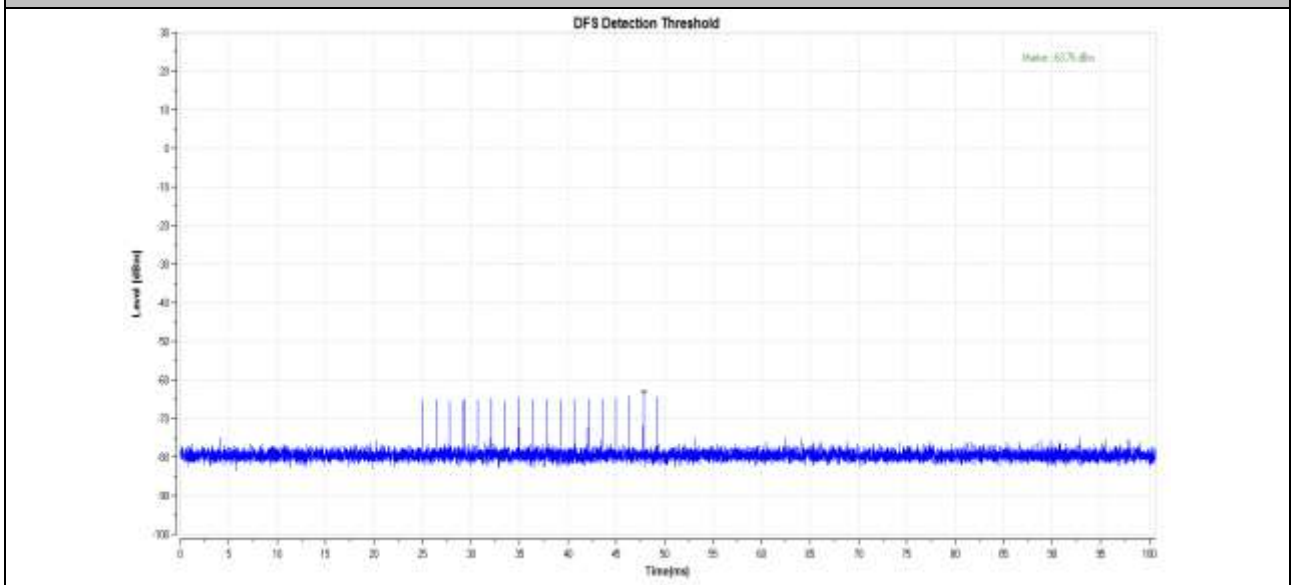

11AC80SISO_5290_Type0

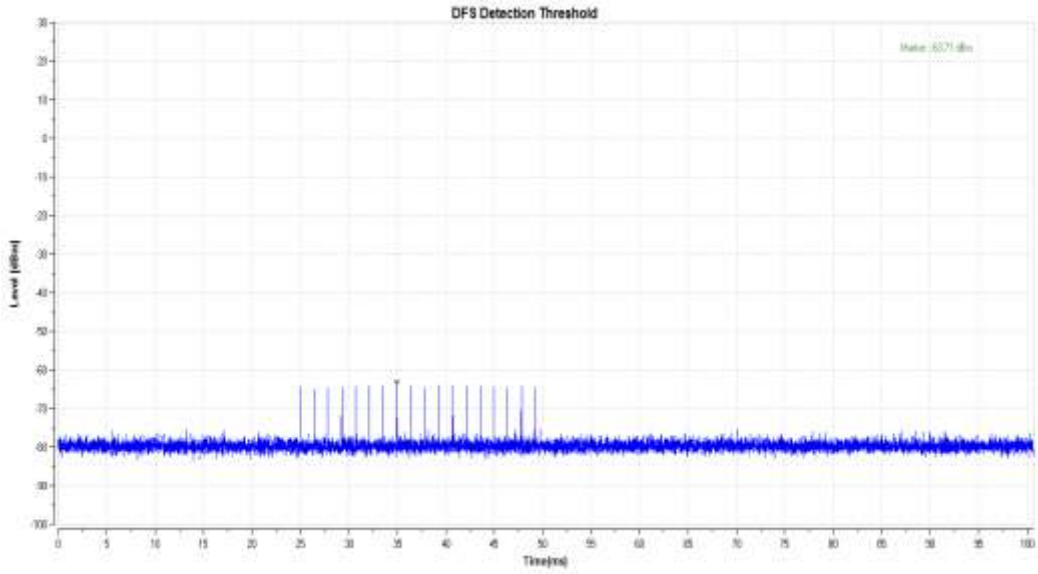

11AC80SISO_5530_Type0

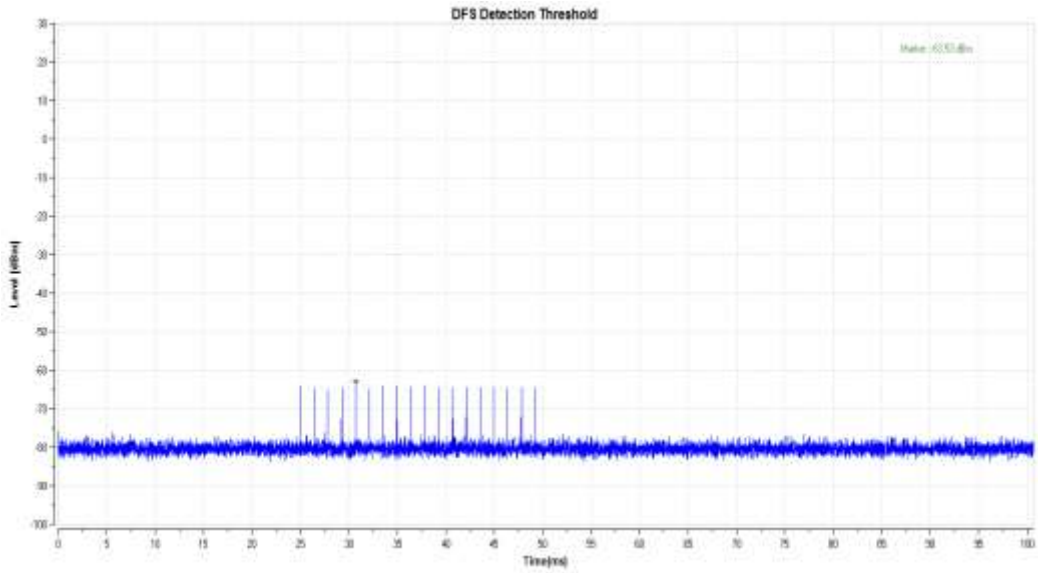



6.1.3 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC

6.1.3.1 Test Result


TestMode	Channel	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11A	5320	31.2	60	834.6	10000	PASS
	5700	57.2	60	867.1	10000	PASS
11N40SISO	5310	36.4	60	828.1	10000	PASS
	5670	42.9	60	848.9	10000	PASS
11AC80SISO	5290	53.3	60	826.8	10000	PASS
	5530	40.3	60	802.1	10000	PASS

6.1.3.2 Test Graphs

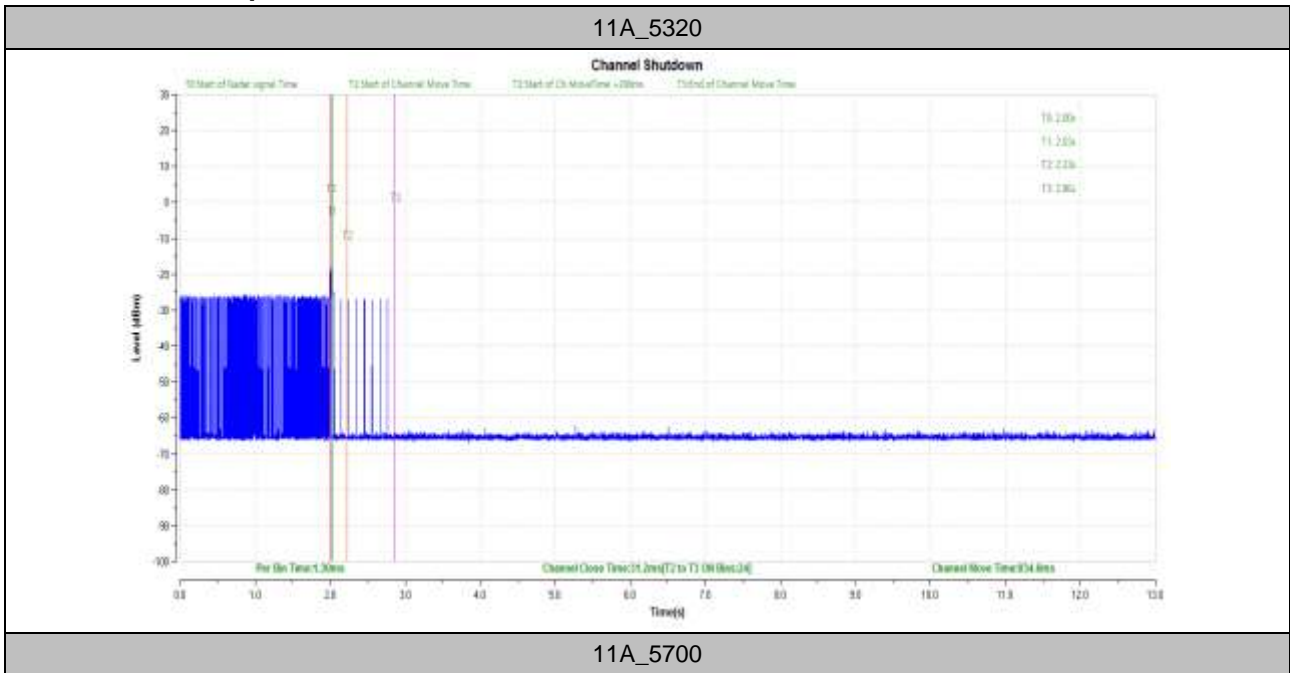


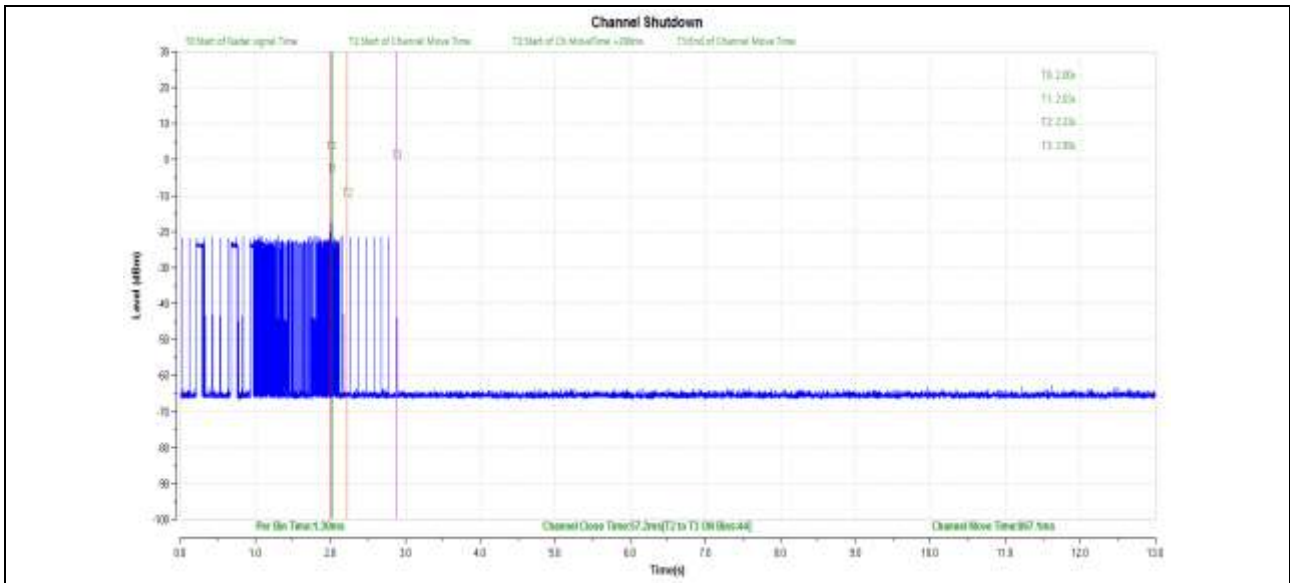


11N40SISO_5310

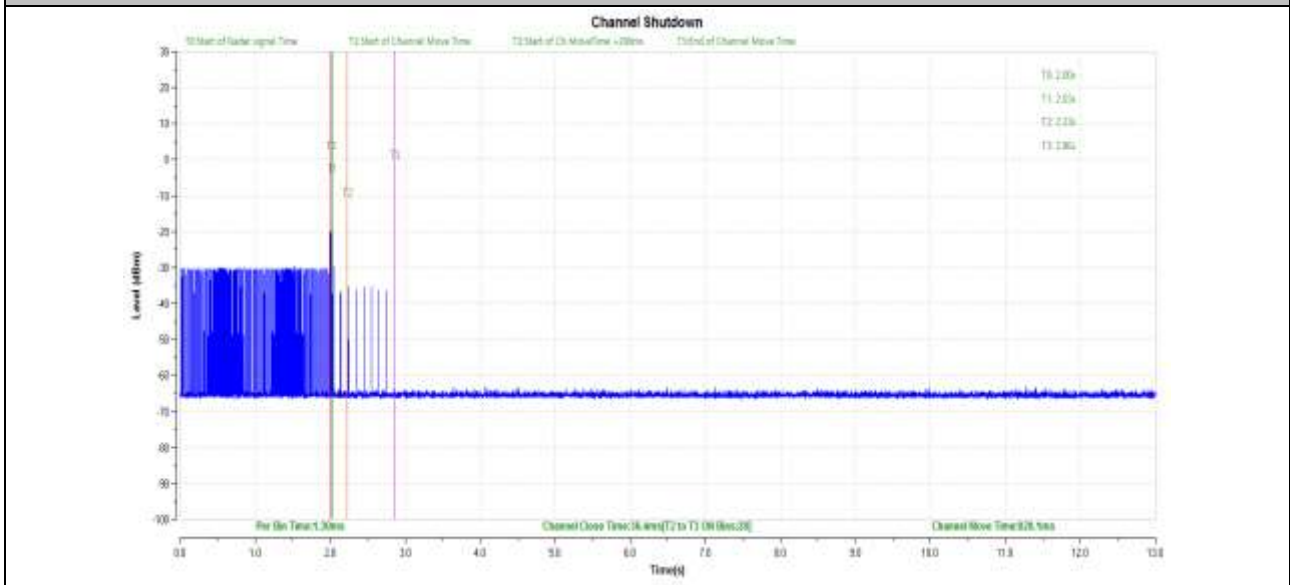


11N40SISO_5670

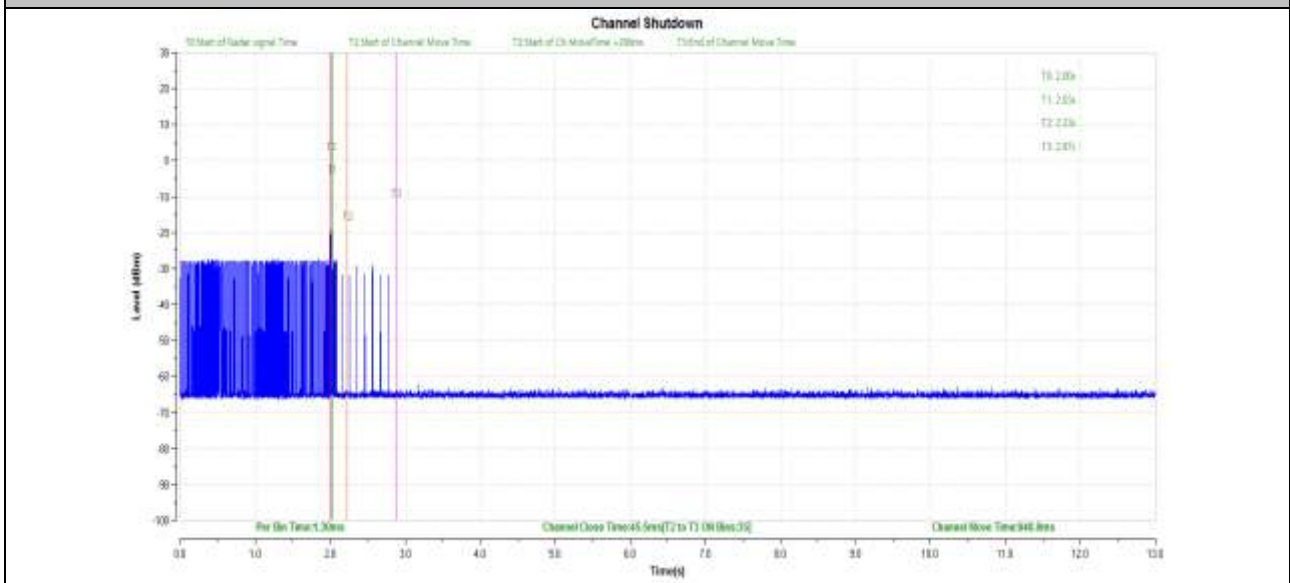

11AC80SISO_5290

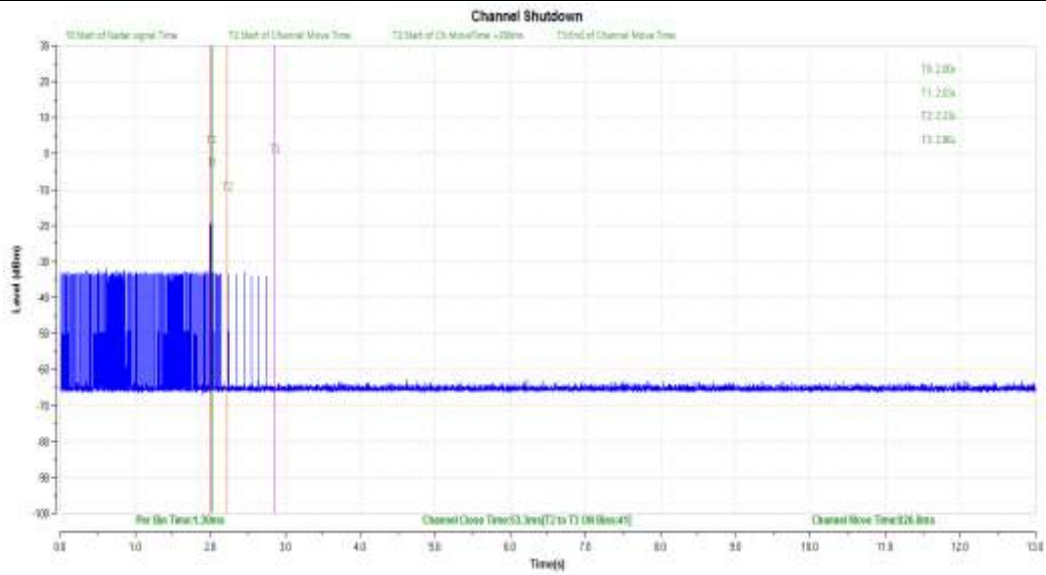

11AC80SISO_5530

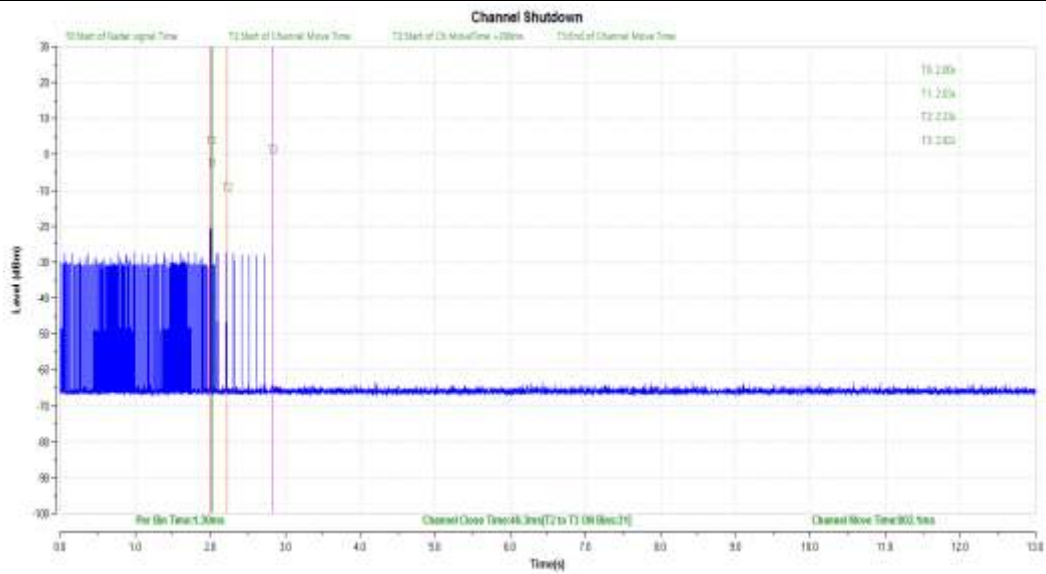


6.1.4 NON- OCCUPANCY PERIOD


6.1.4.1 Test Result

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.


TestMode	Channel	Result	Limit[s]	Verdict
11A	5320	see test graph	>=1800	PASS
	5700	see test graph	>=1800	PASS
11N40SISO	5310	see test graph	>=1800	PASS
	5670	see test graph	>=1800	PASS
11AC80SISO	5290	see test graph	>=1800	PASS
	5530	see test graph	>=1800	PASS

6.1.4.2 Test Graphs

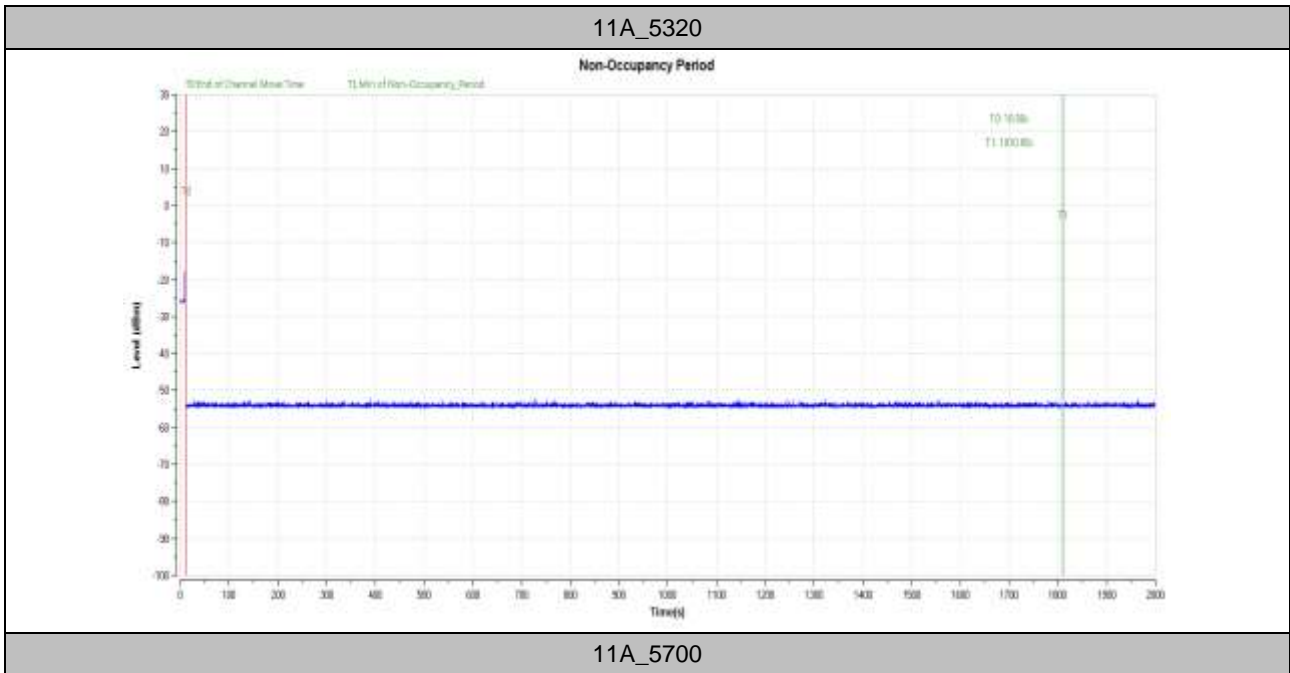


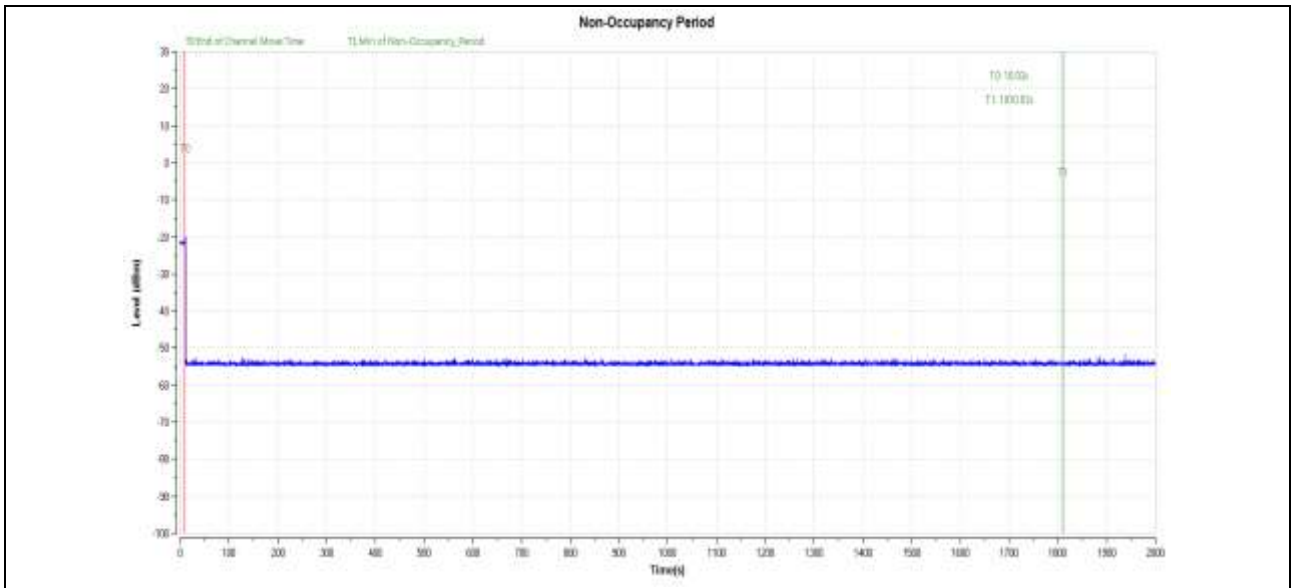


11N40SISO_5310

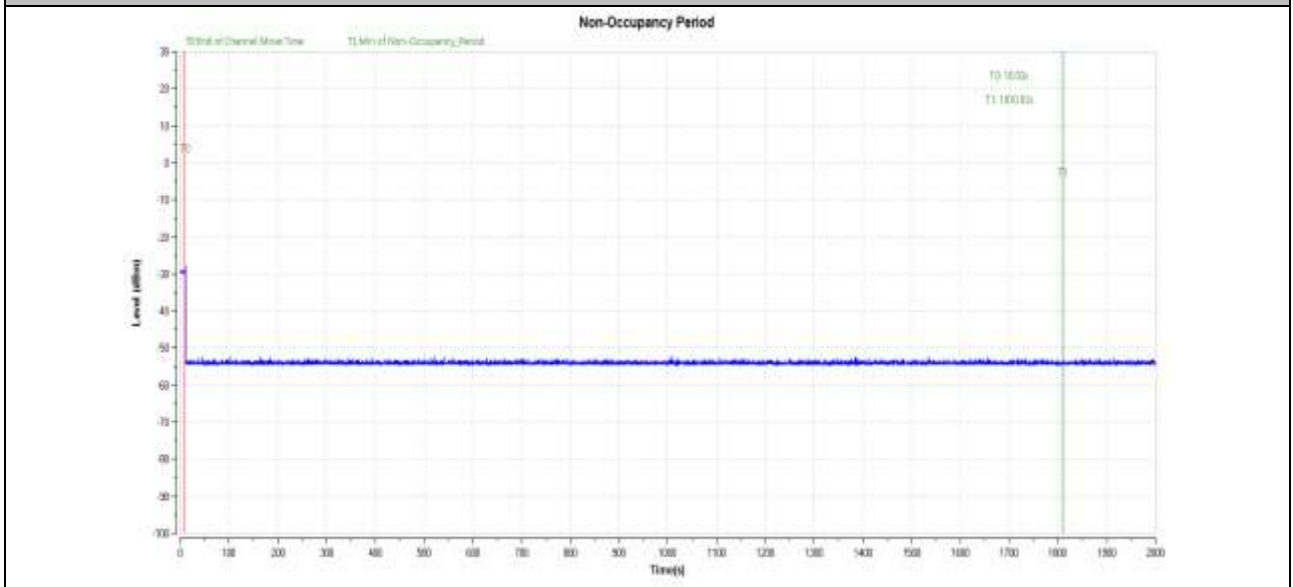

11N40SISO_5670

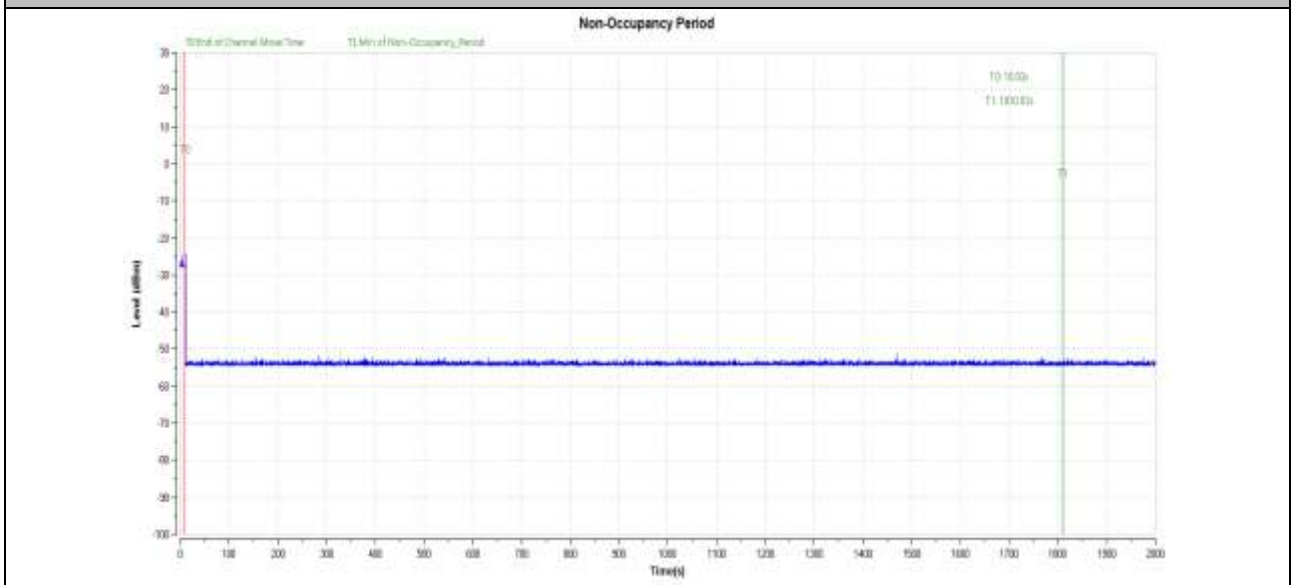

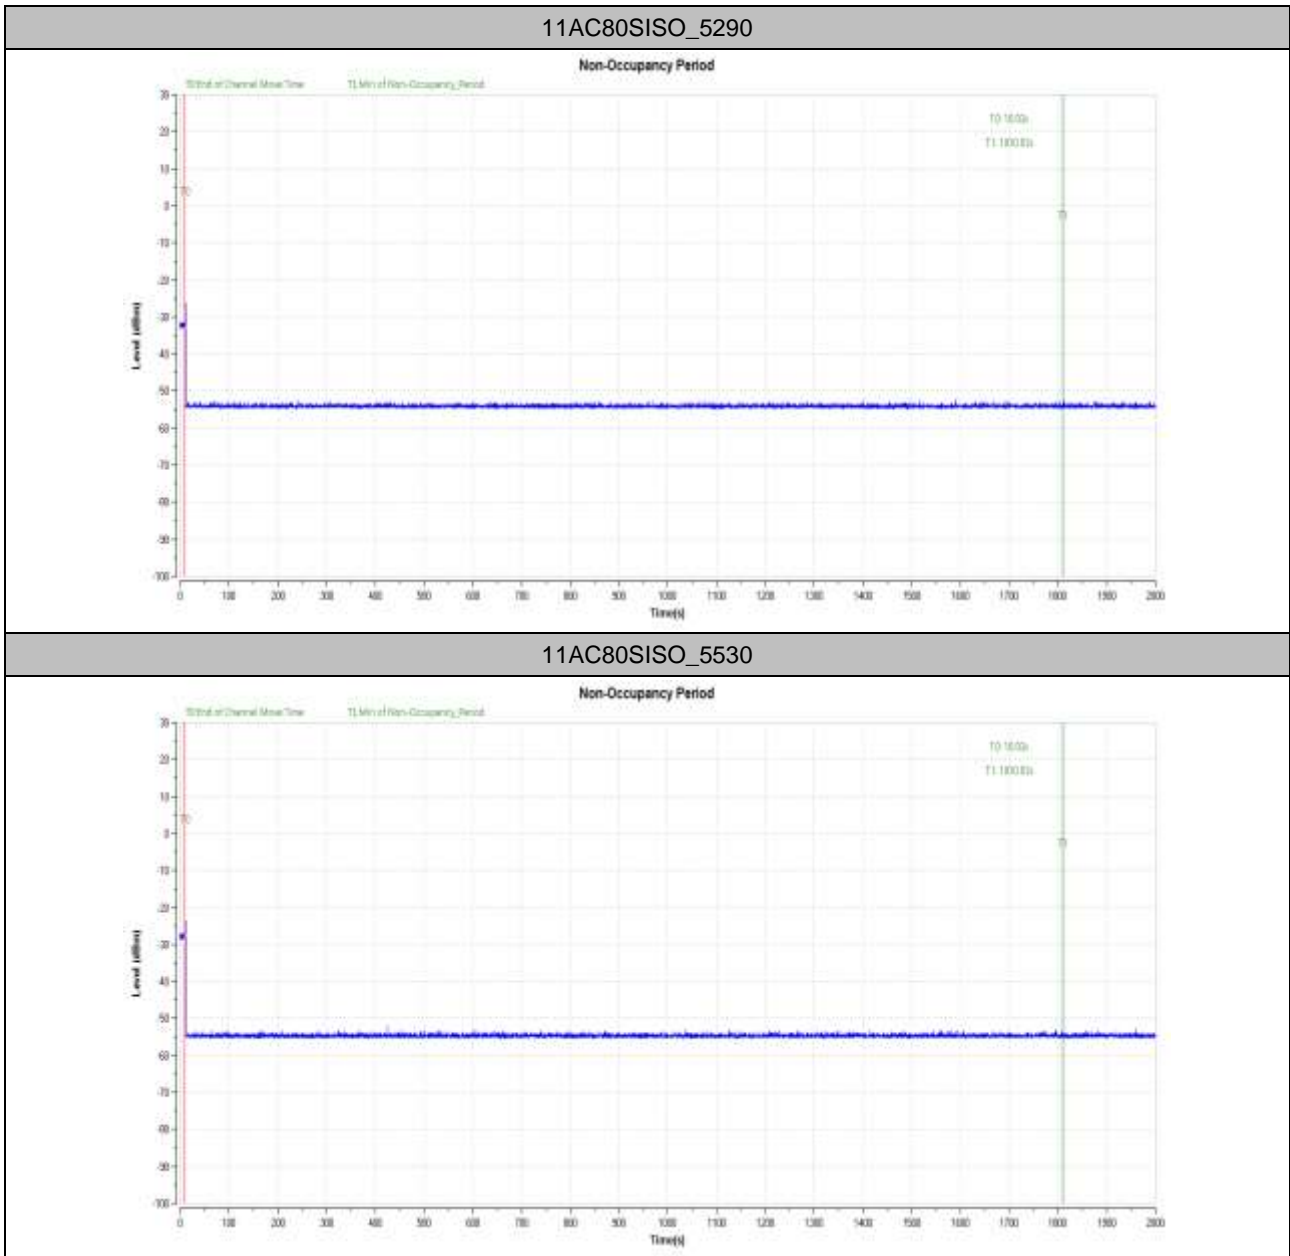

7 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Parameter	Measurement Uncertainty
DFS Threshold	0.96 dB

END