







2.9 11N20_H@Ant 1


Pref:

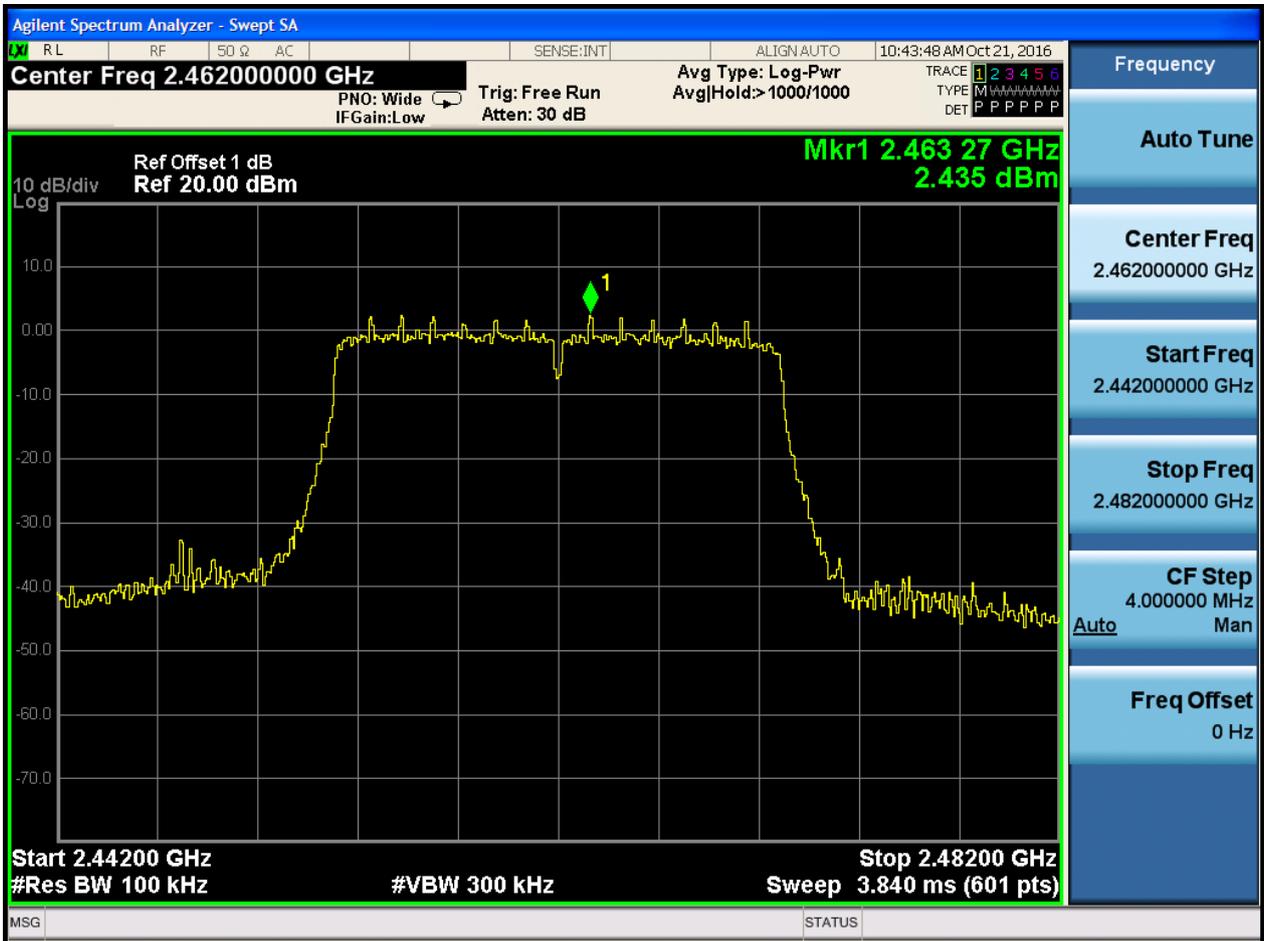





Puw:

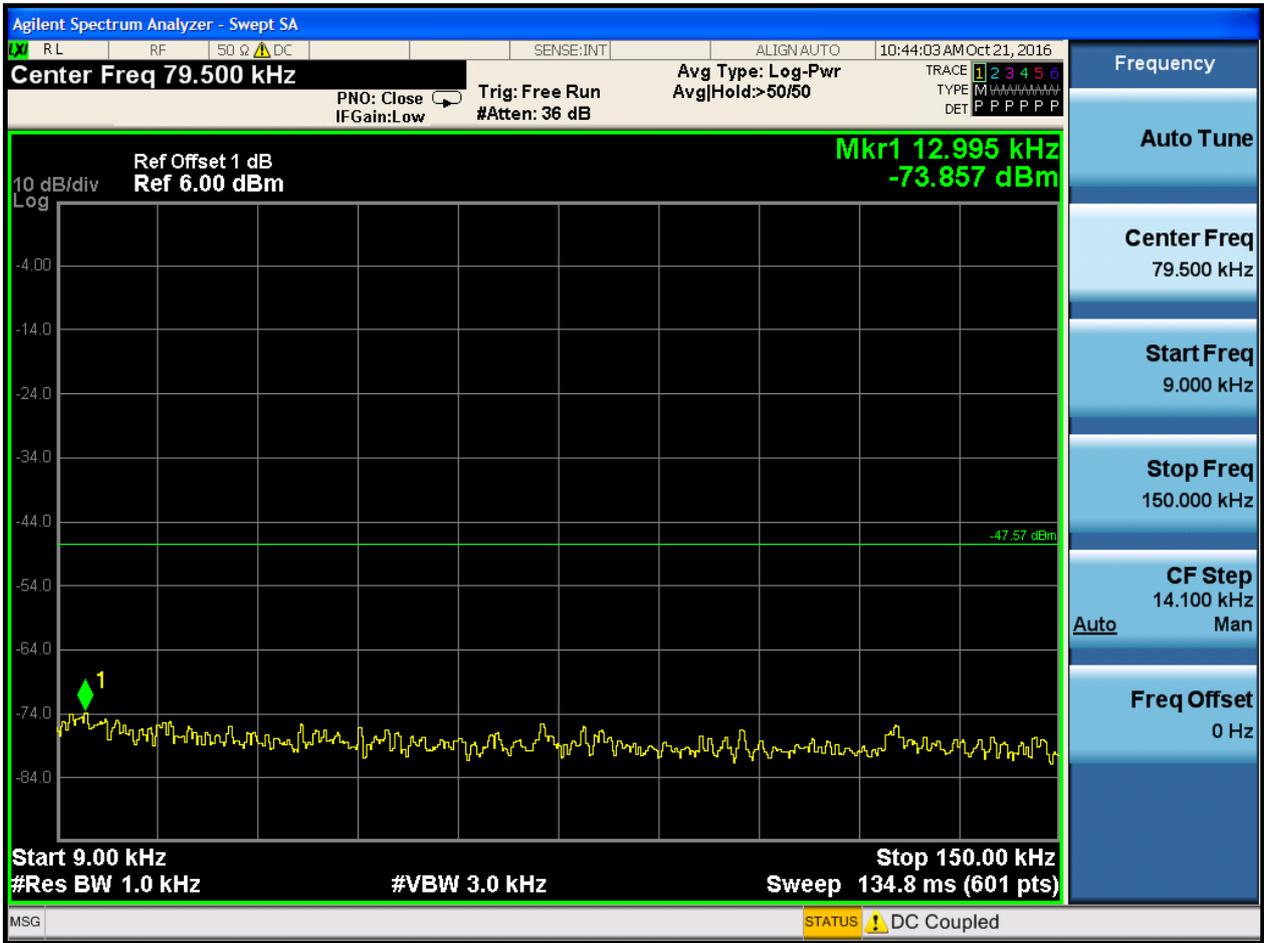

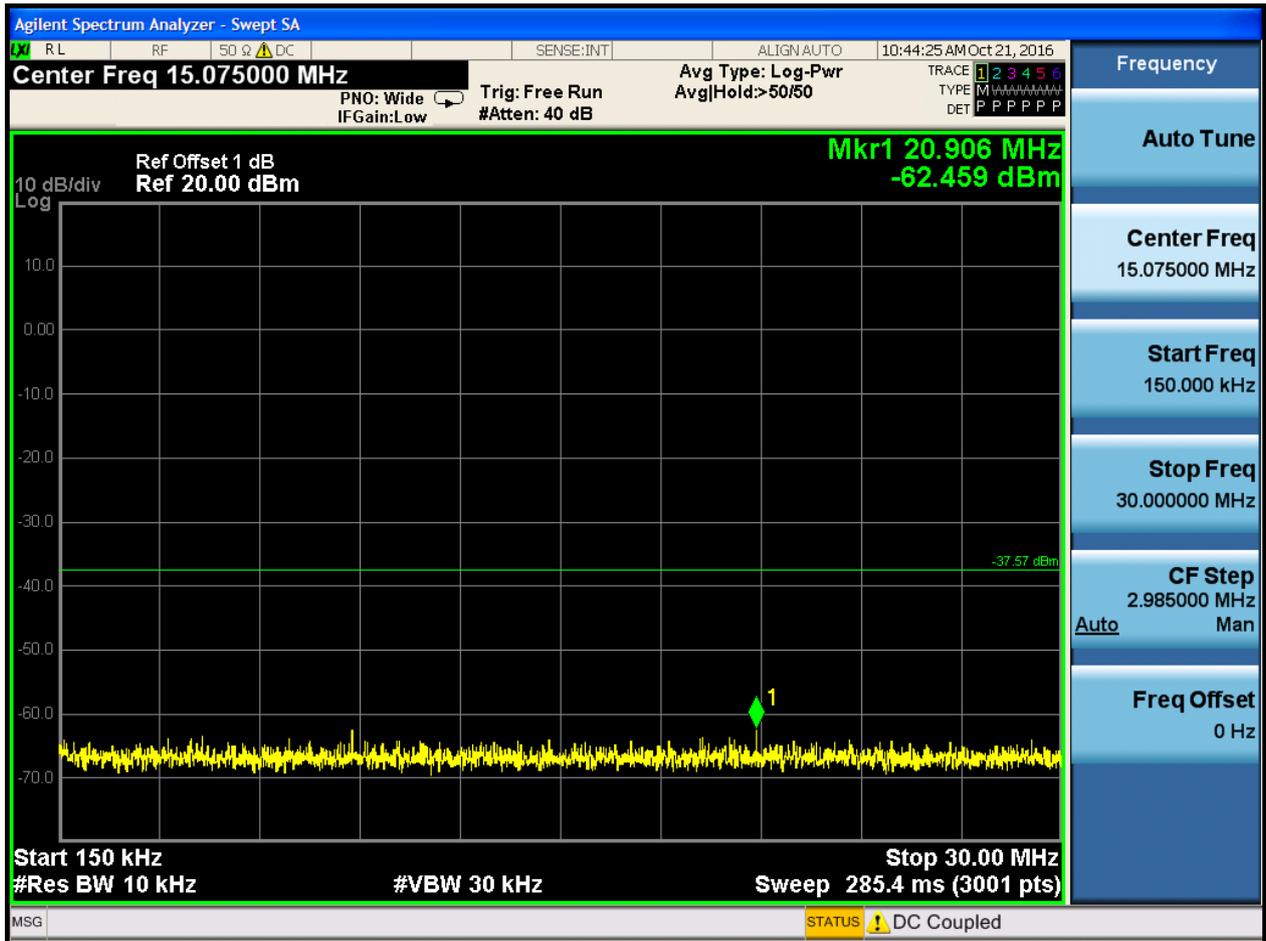



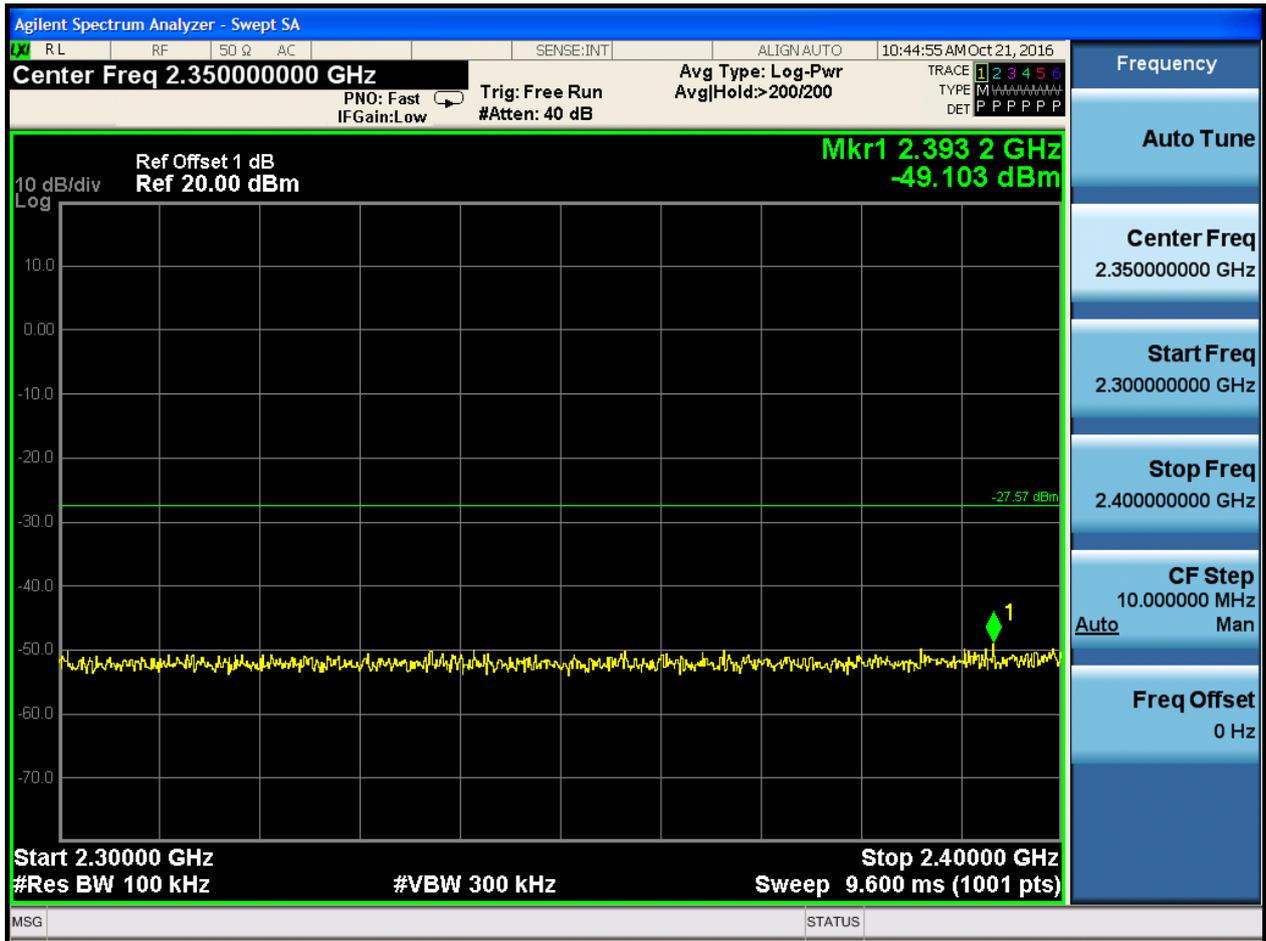

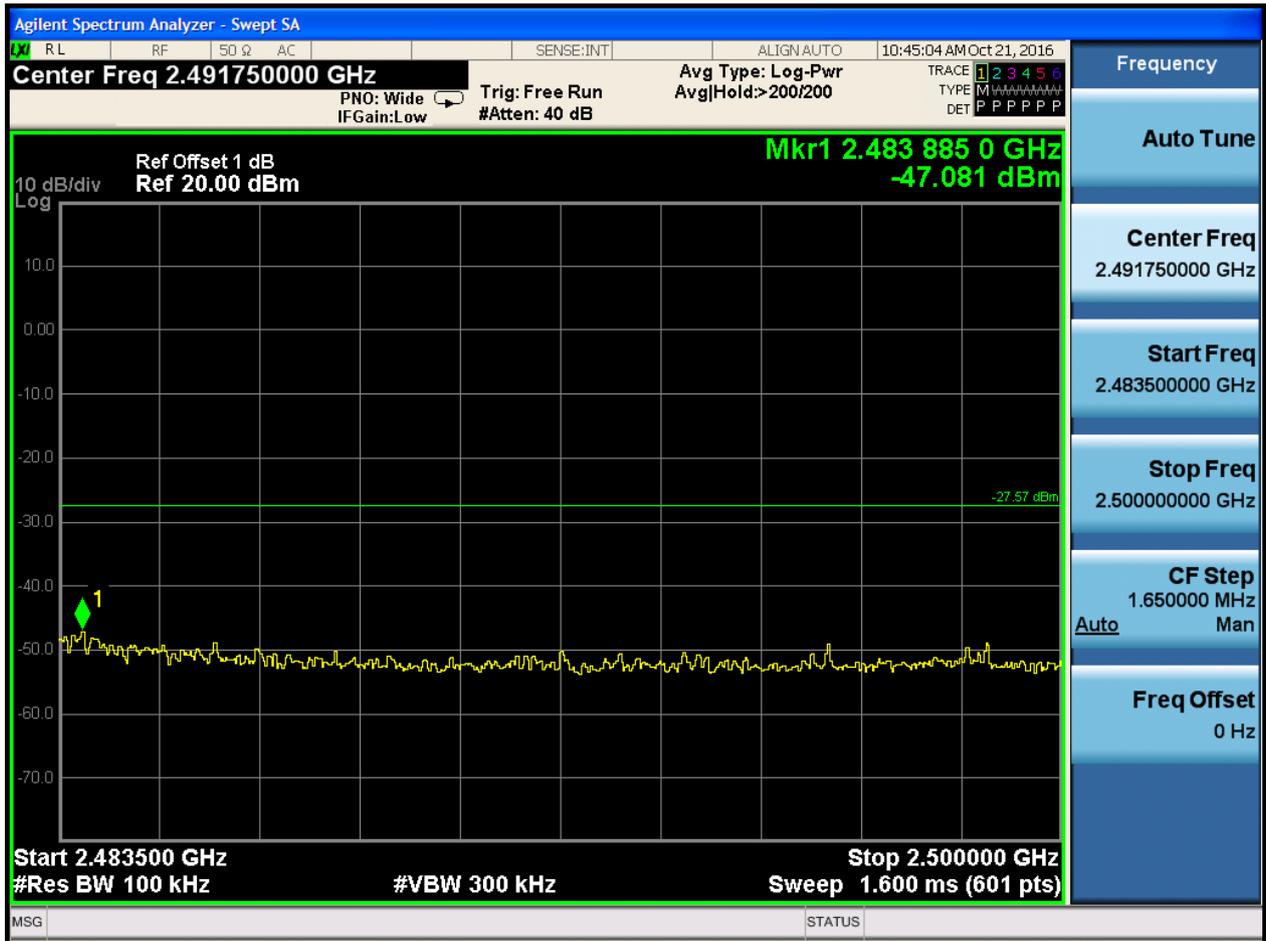







2.10 11N40_L@Ant 1


Pref:

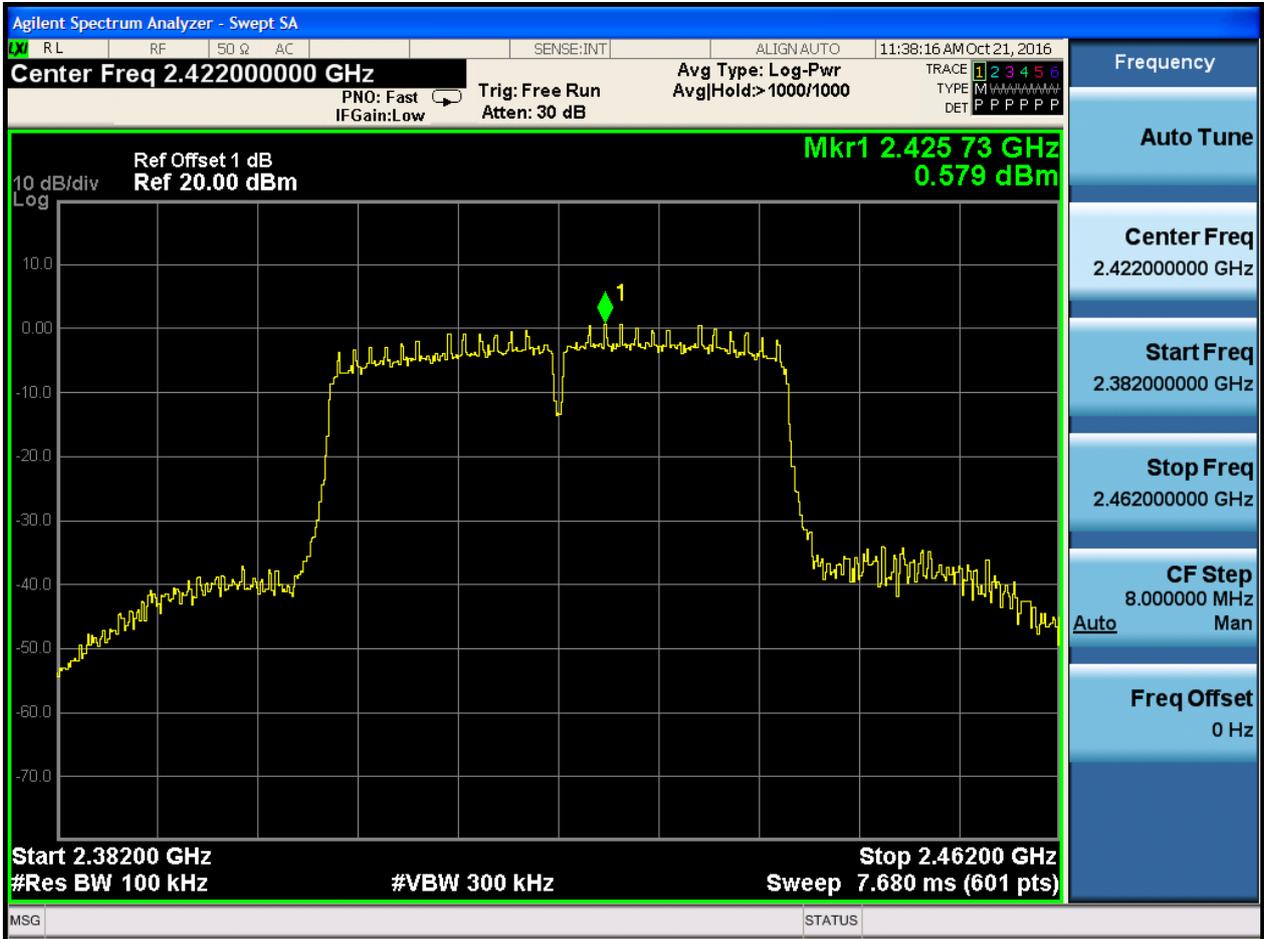





Puw:

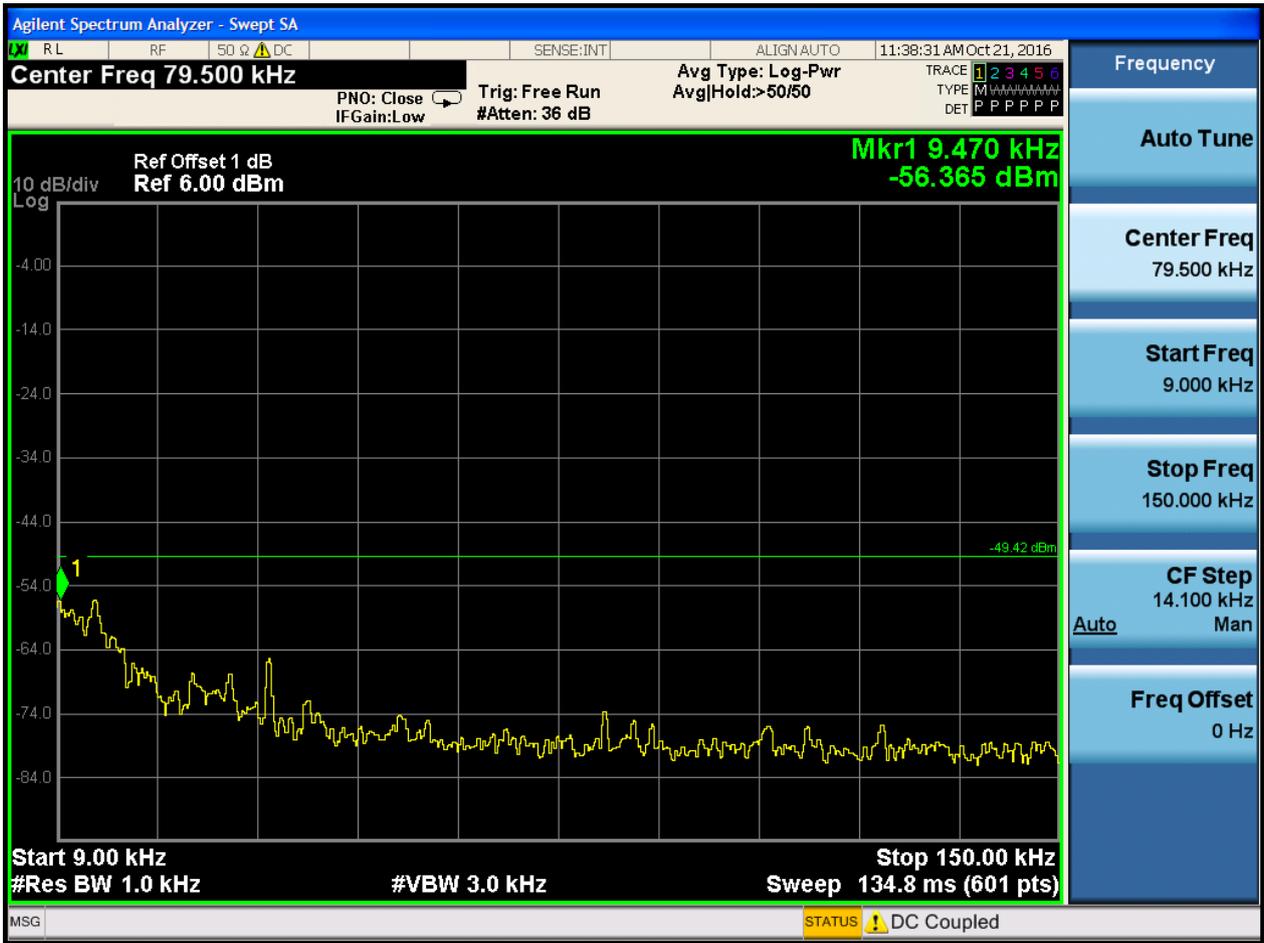

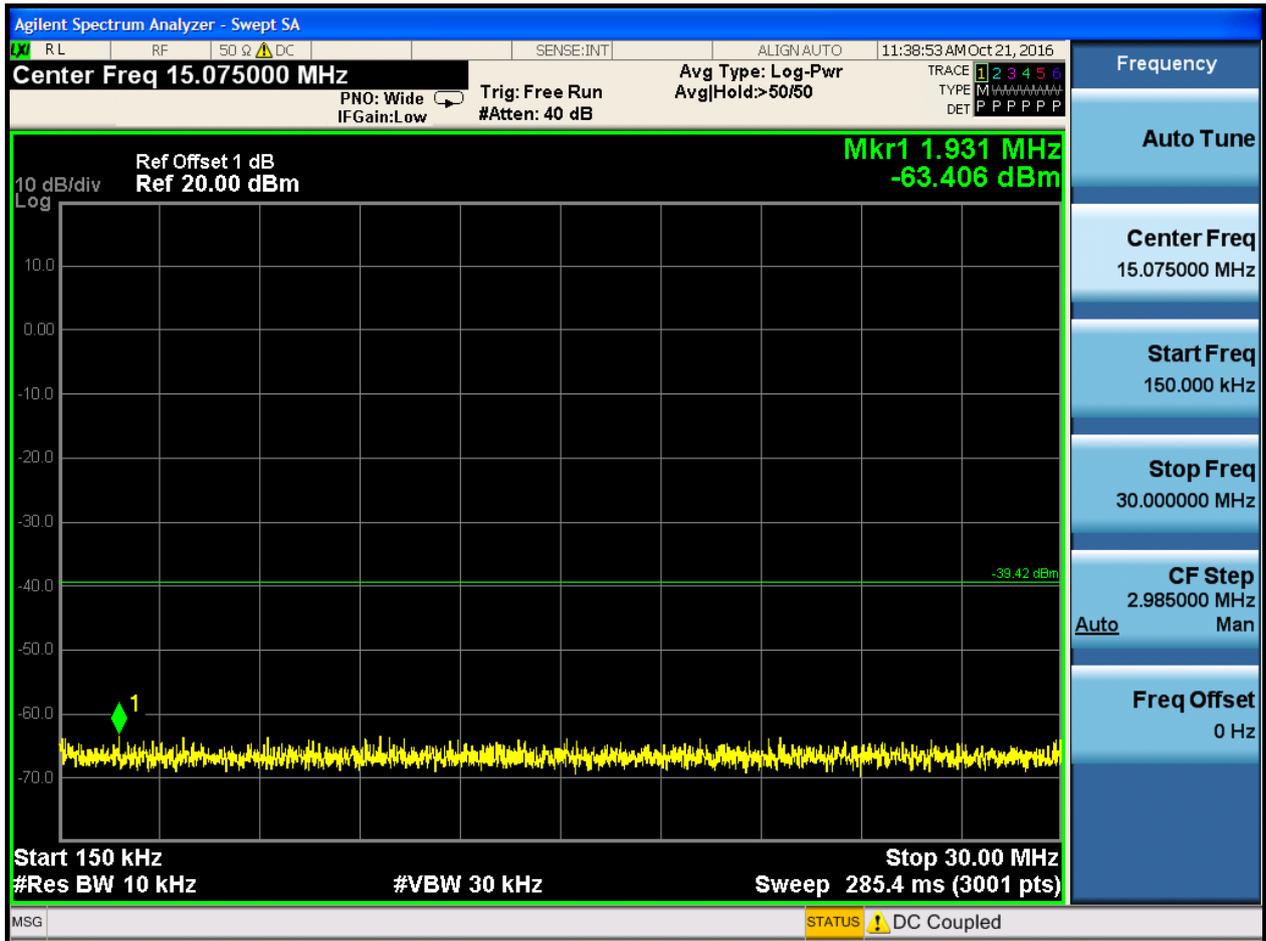

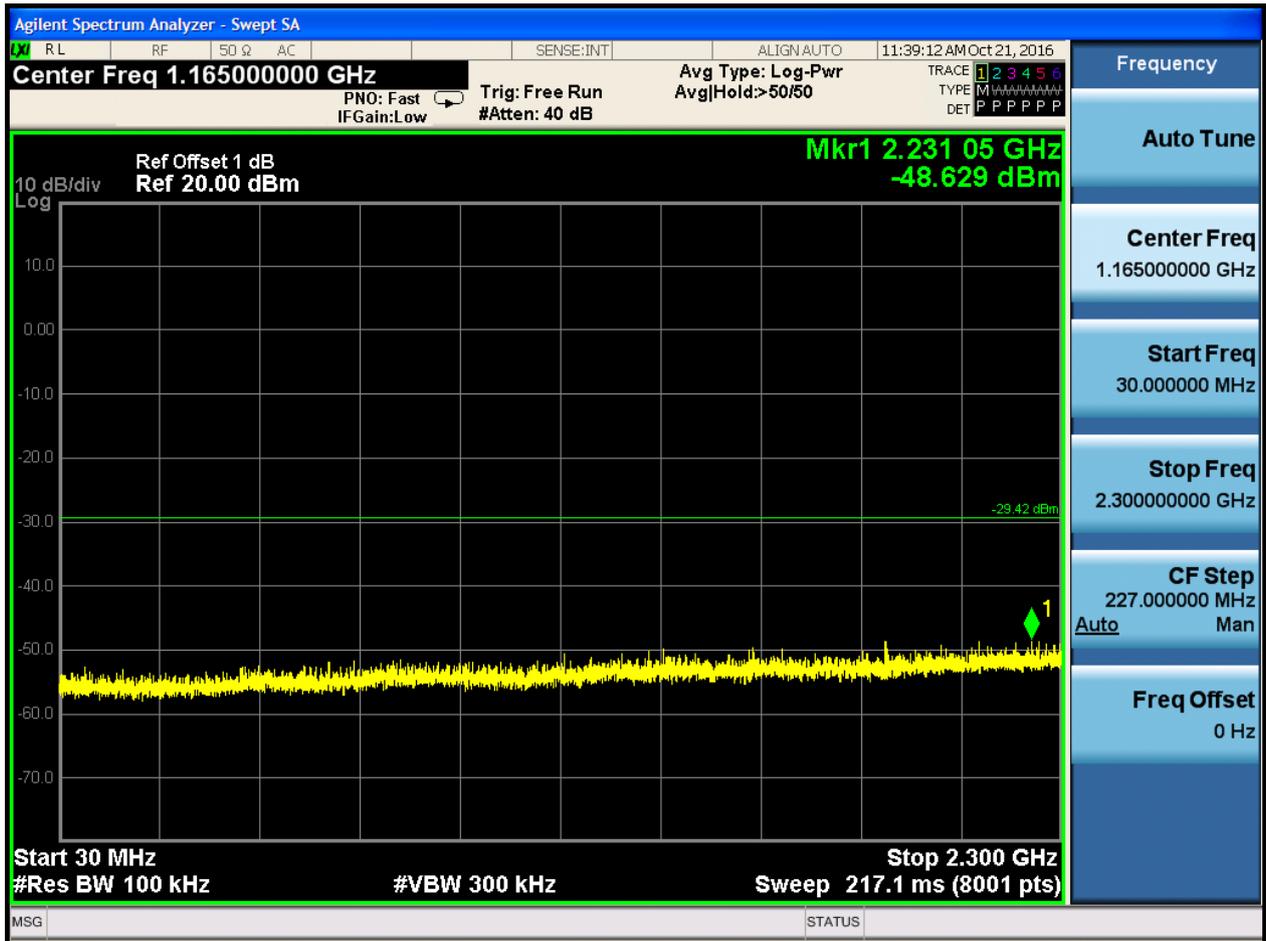

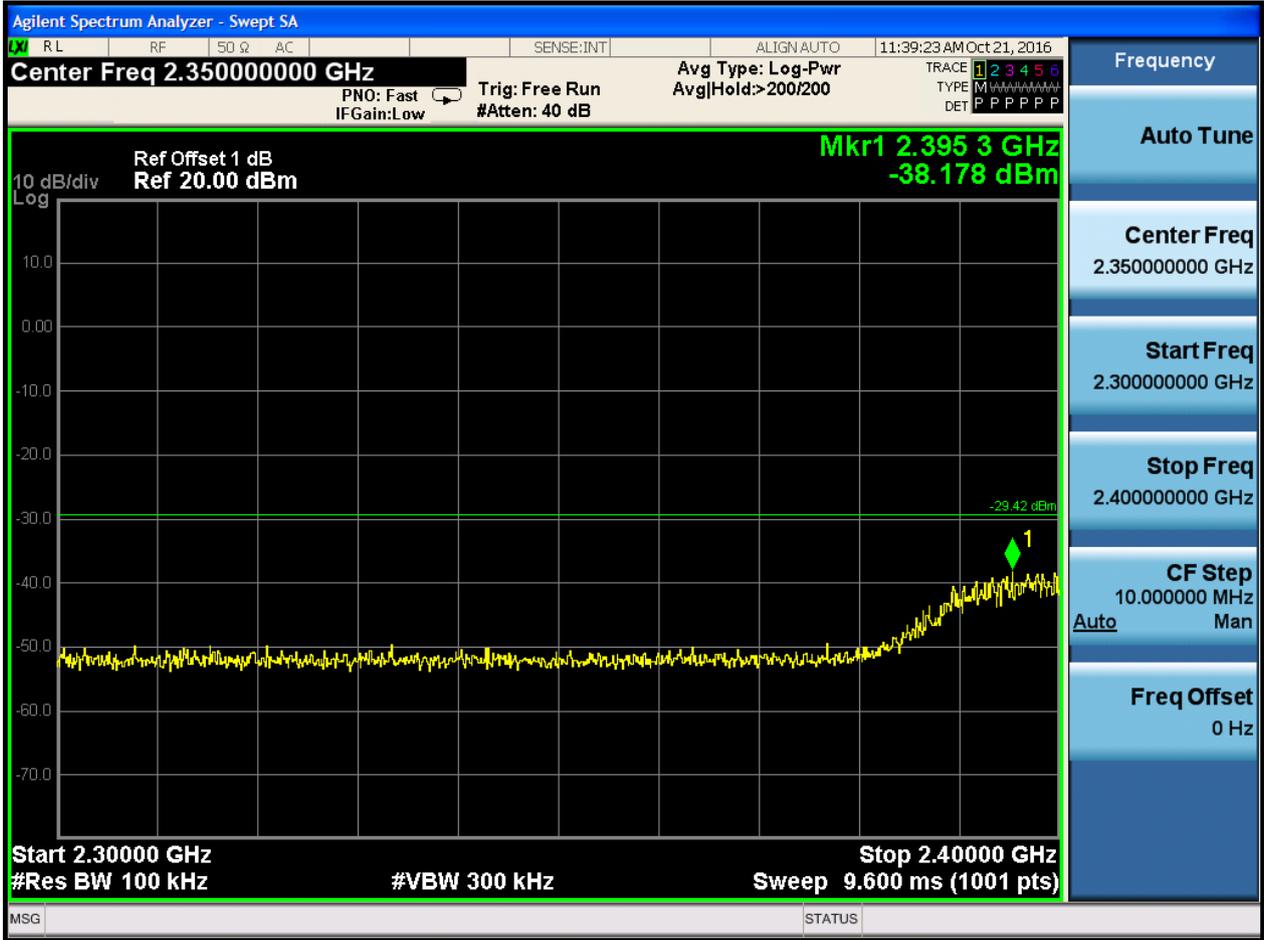








2.11 11N40_M@Ant 1


Pref:

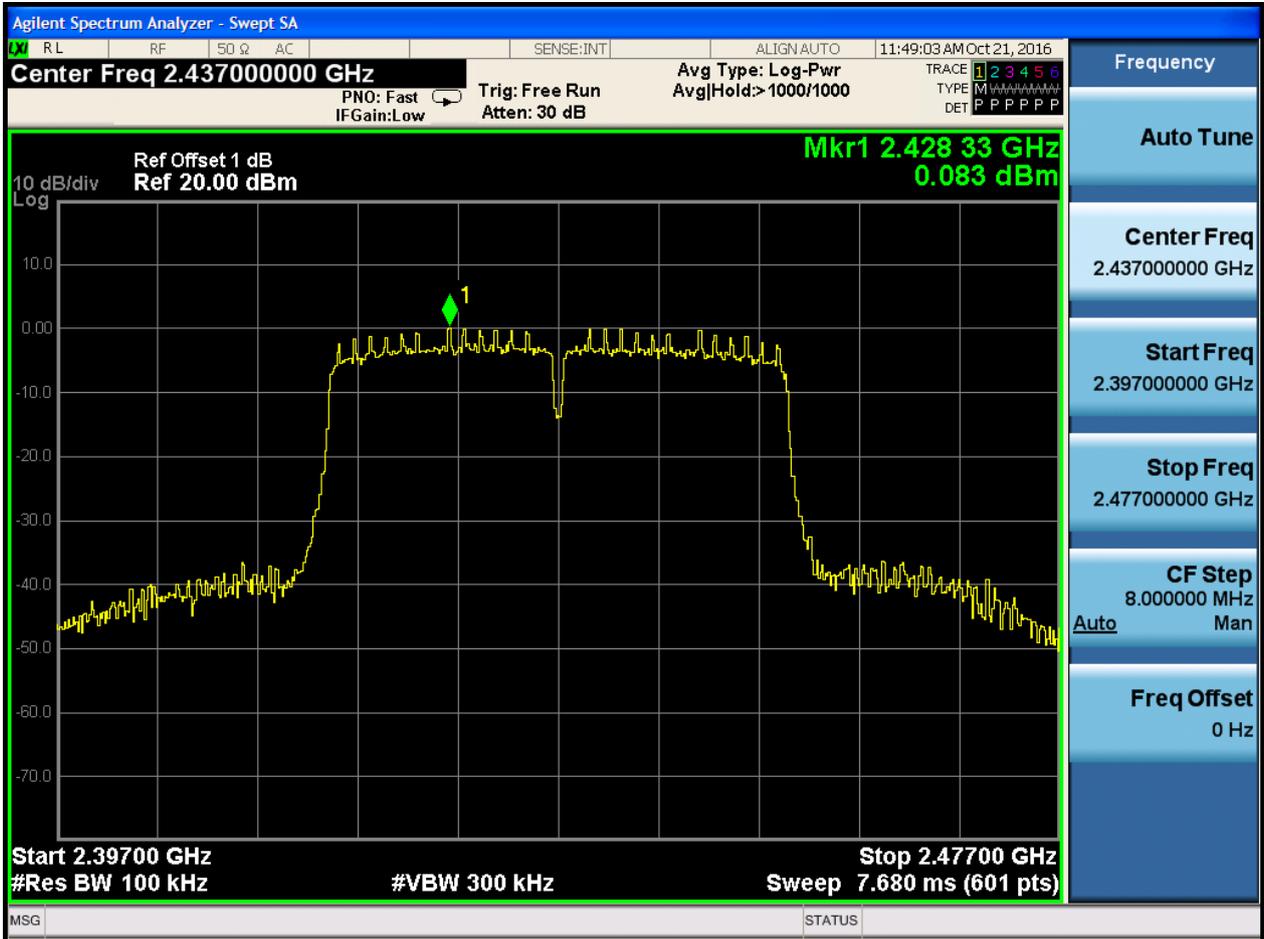

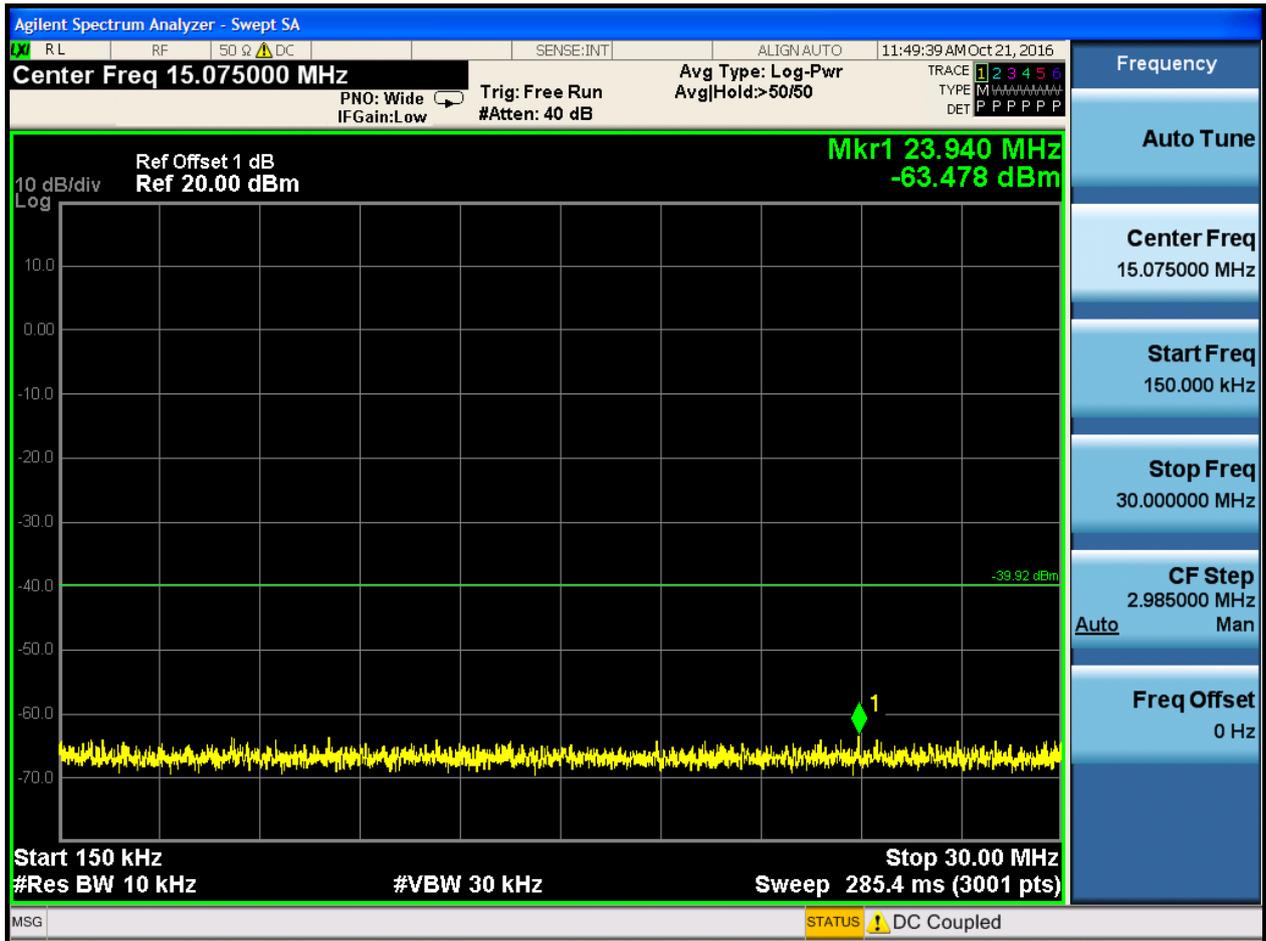



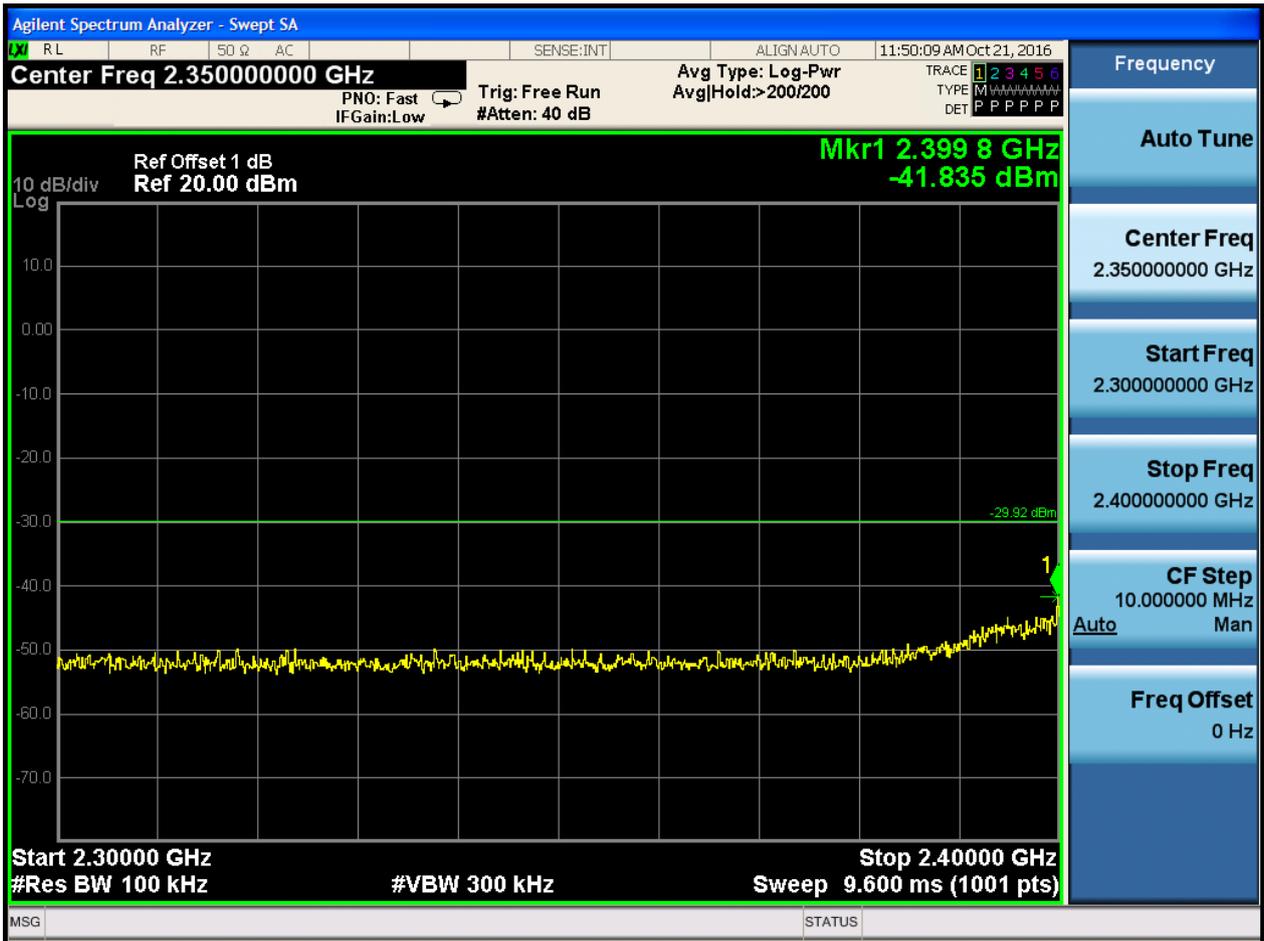

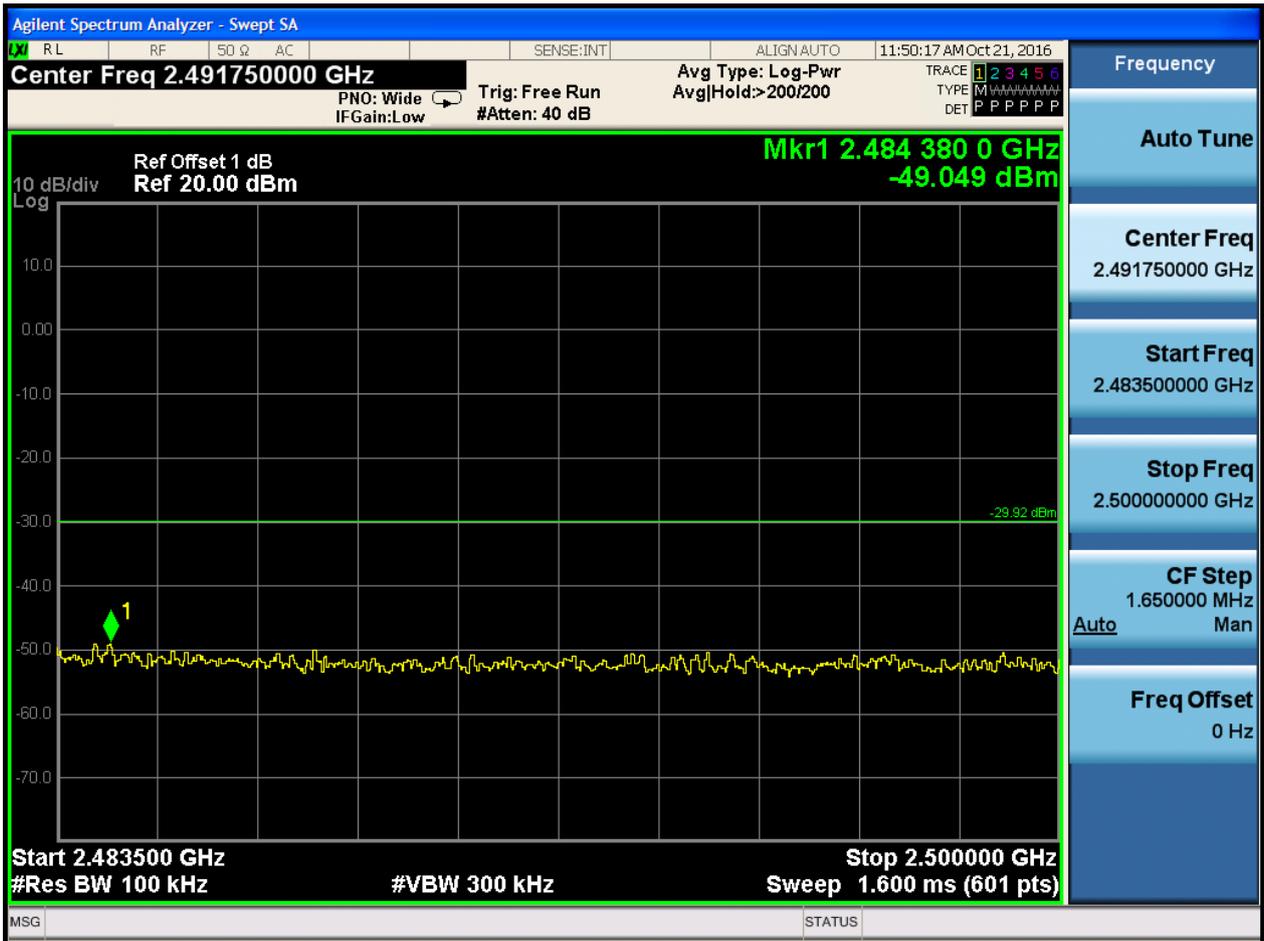







2.12 11N40_H@Ant 1


Pref:

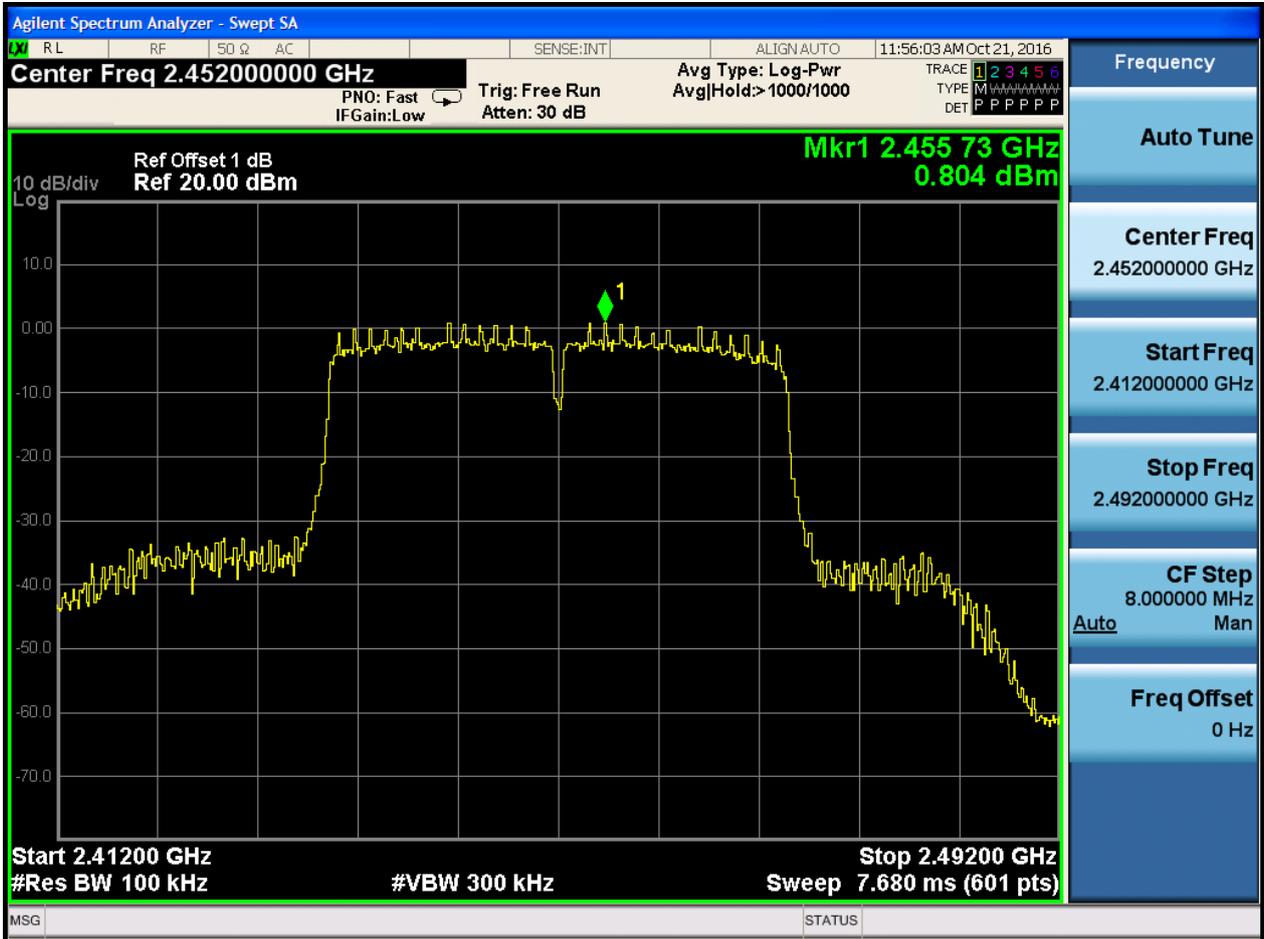




Puw:

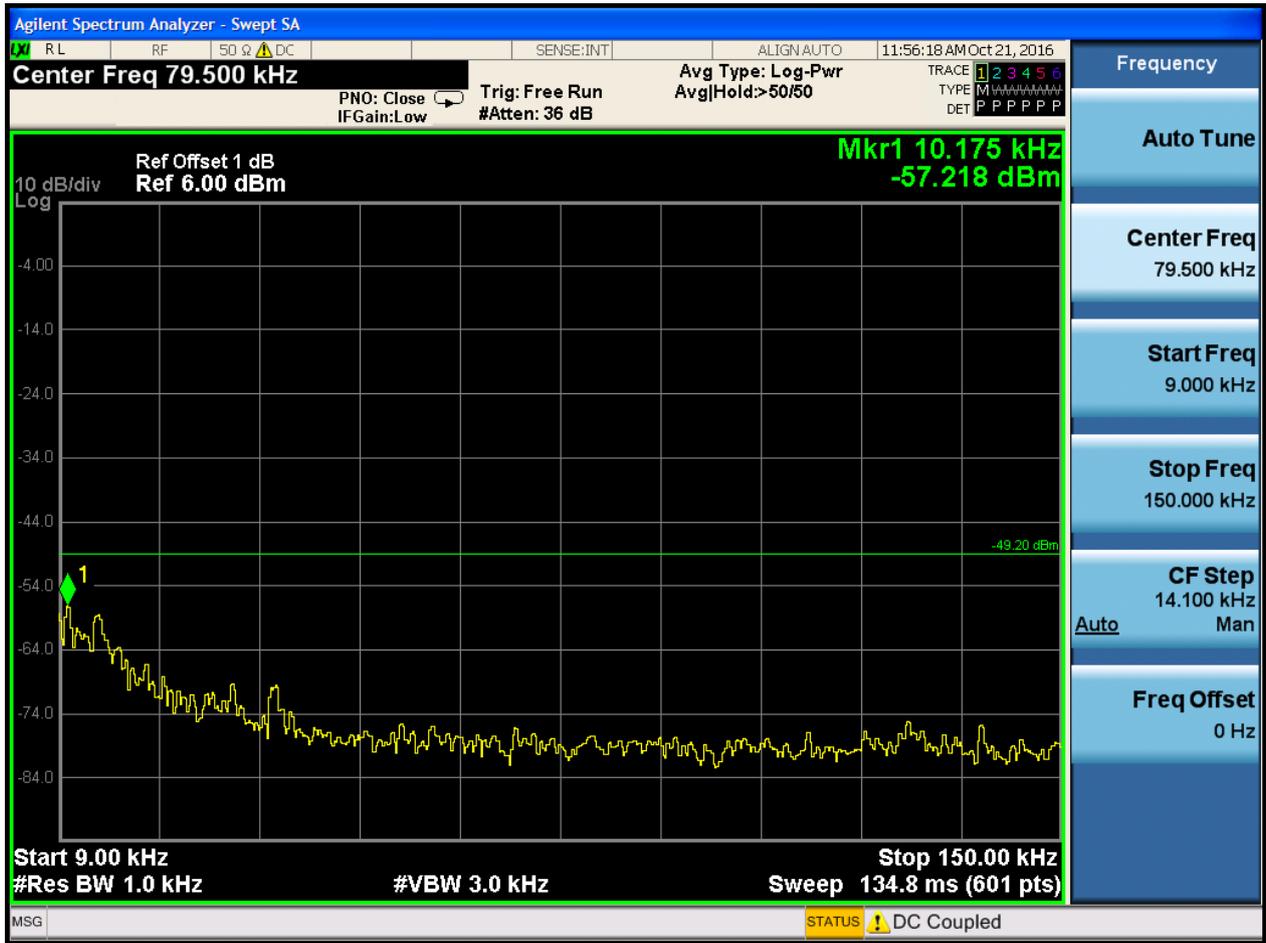

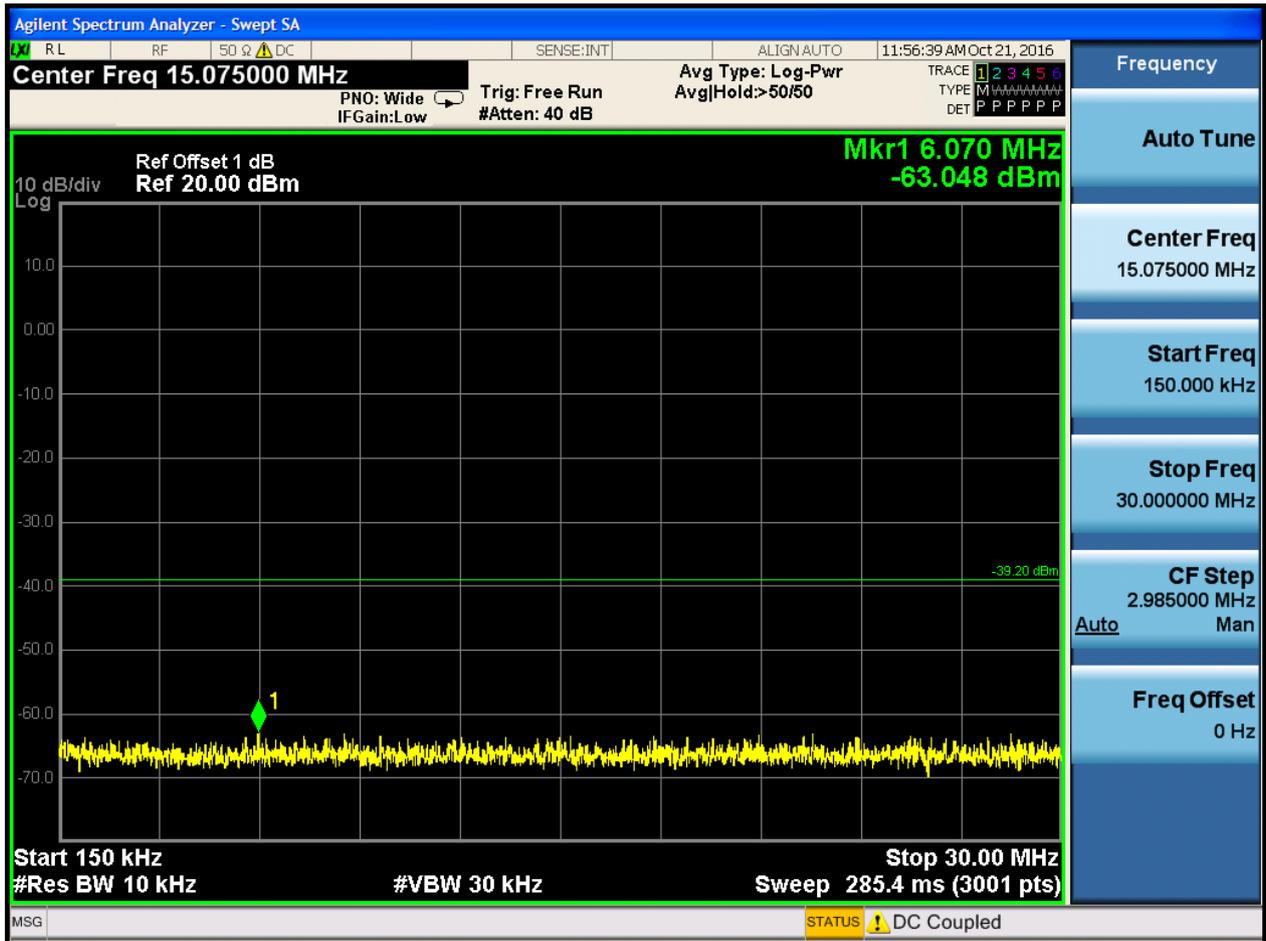





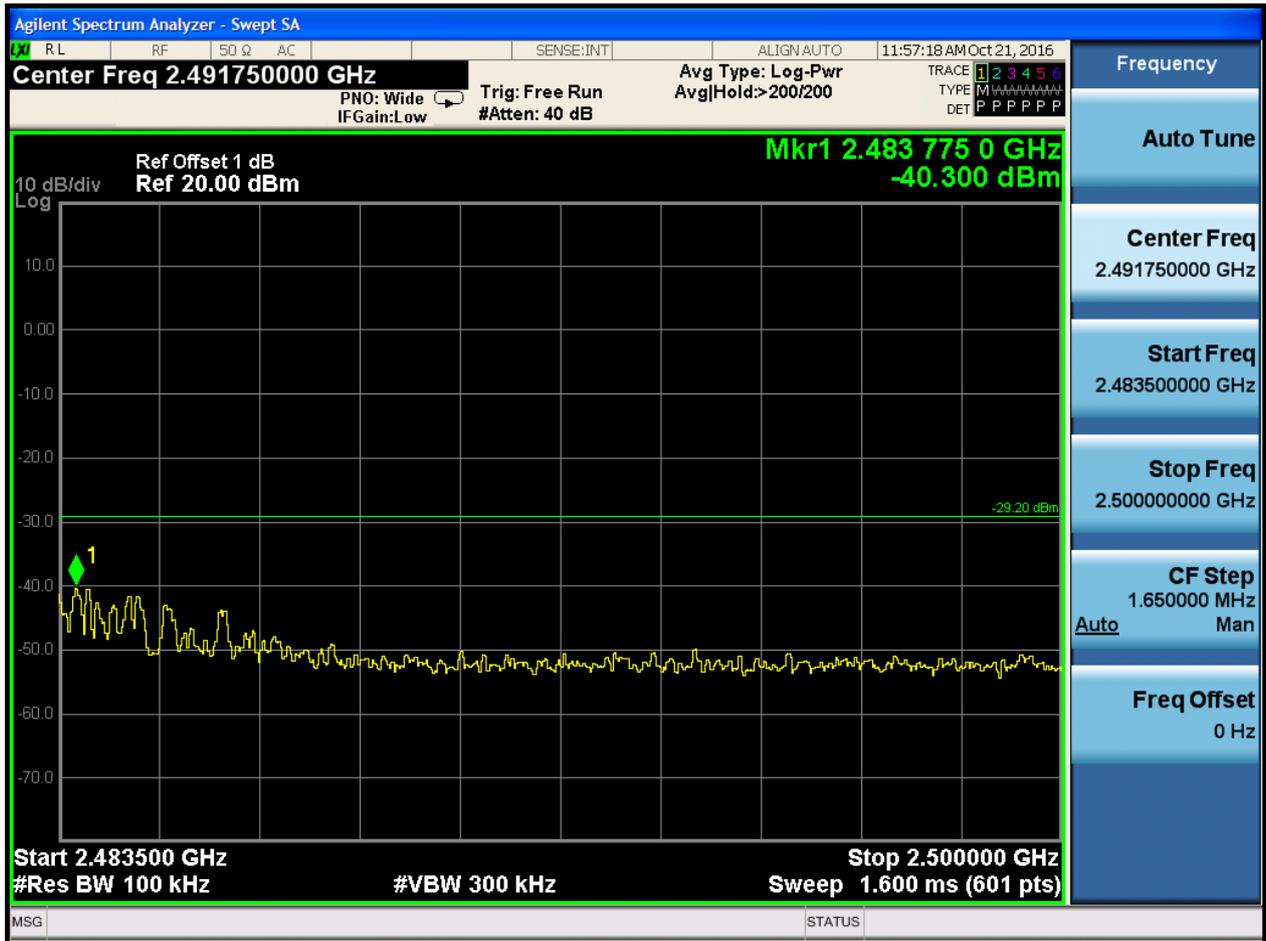





Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


1.1 Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

2.1 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

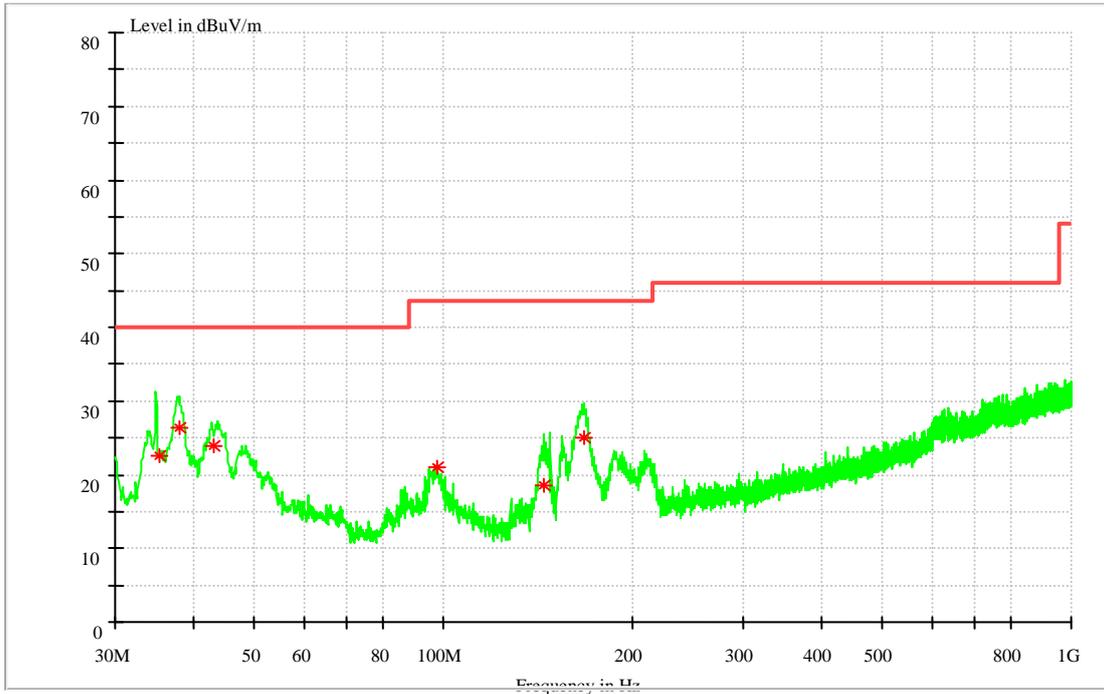

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
35.393300	22.64	40.00	17.36	117.0	V	126.0	15.2
37.922150	26.32	40.00	13.68	100.0	V	158.0	15.4
43.203600	23.90	40.00	16.10	124.0	V	358.0	15.3
97.903500	21.01	43.50	22.49	130.0	V	25.0	13.6
145.046950	18.53	43.50	24.97	107.0	V	290.0	10.3
167.020150	25.03	43.50	18.47	100.0	V	314.0	10.9

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

3.1Part 3: Testing Range of “1 GHz to 3 GHz”

Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.


Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode:

3.1.1Test Mode: 11B

3.1.1.1 Channel 1 @Ant 1

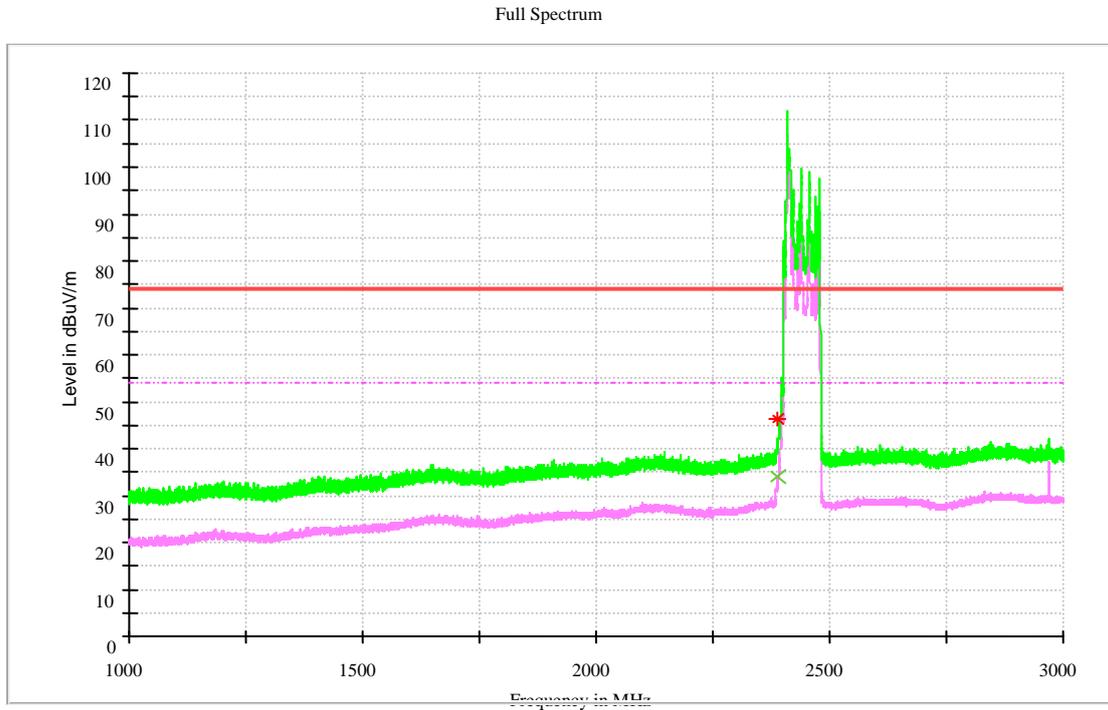

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	34.09	54.00	19.91	100.0	H	34.09	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	46.30	74.00	27.70	100.0	H	260.0	-7.6

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

3.1.1.2 Channel 11@Ant 1

Full Spectrum

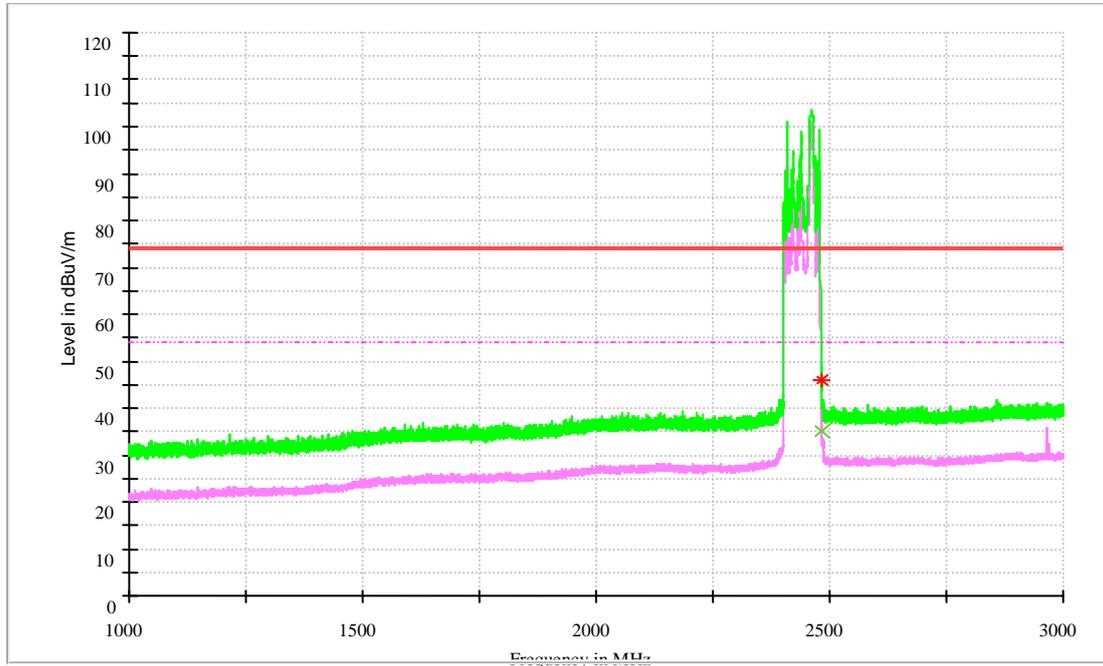

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	35.23	54.00	18.77	150.0	H	0.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	46.06	74.00	27.94	100.0	H	1.0	-5.4

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

3.1.2 Test Mode: 11G

3.1.2.1 Channel 1 @Ant 1

Full Spectrum

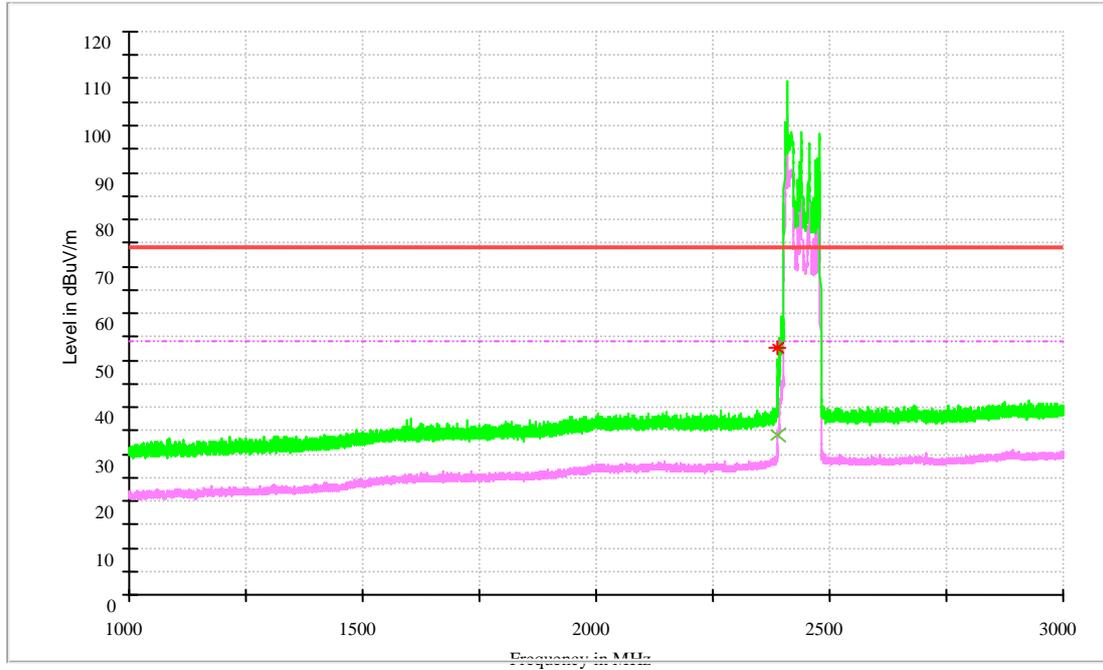

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	33.88	54.00	20.12	100.0	H	261.0	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	52.63	74.00	21.37	147.0	V	253.0	-7.6

Note2:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

3.1.2.2 Channel 11@Ant 1

Full Spectrum

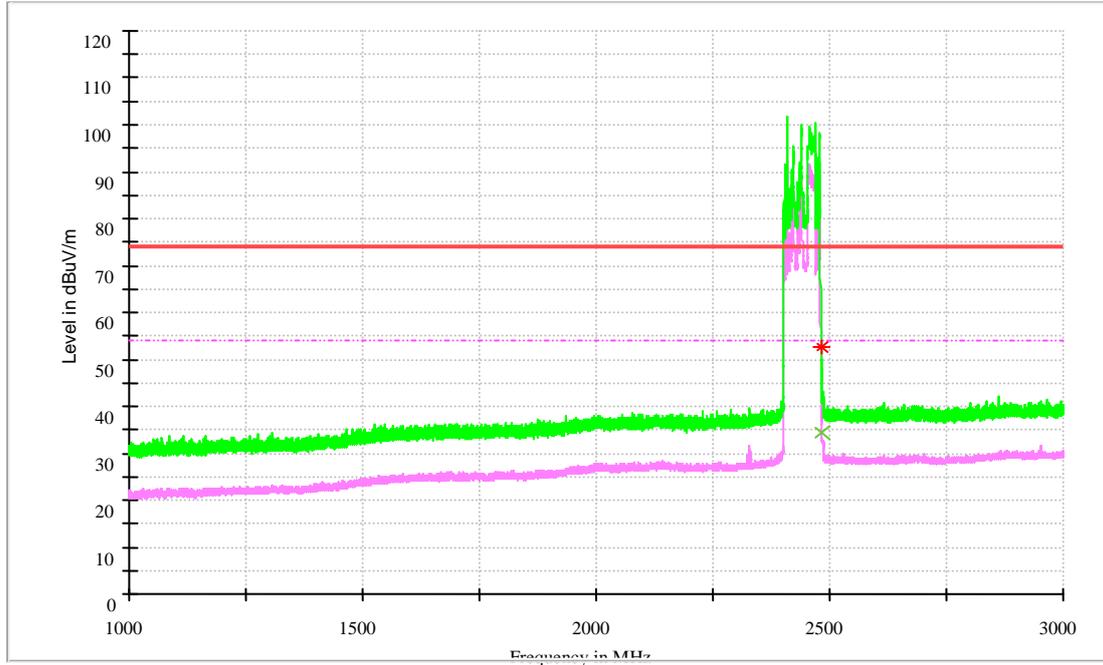

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	34.26	54.00	19.74	150.0	H	39.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	52.70	74.00	21.30	148.0	H	119.0	-5.4

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

3.1.3 Test Mode: 11N20

3.1.3.1 Channel 1 @Ant 1

Full Spectrum

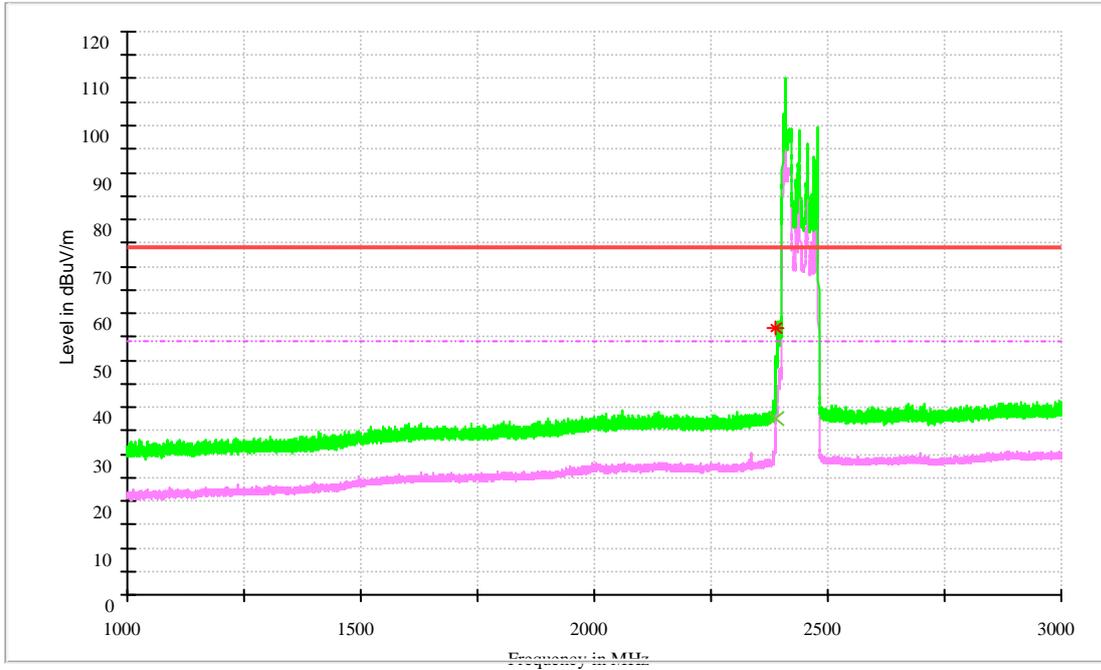

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	37.43	54.00	16.57	100.0	H	261.0	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	56.71	74.00	17.29	150.0	H	236.0	-7.6


Note2:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

3.1.3.2 Channel 11@Ant 1

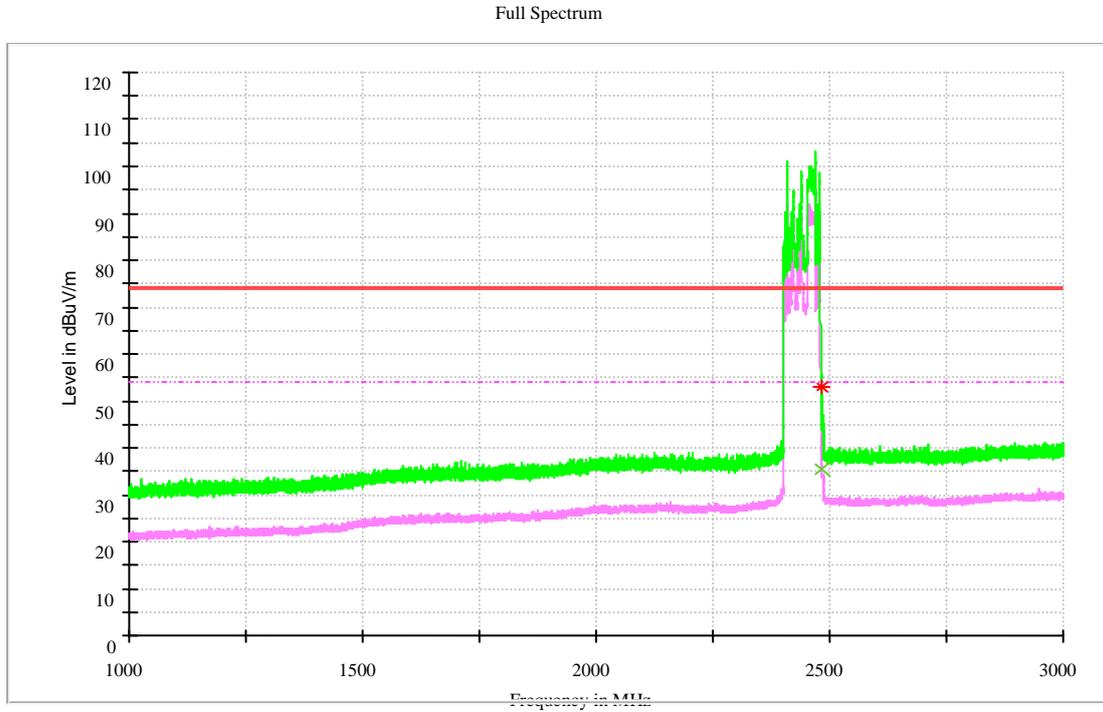

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	35.35	54.00	18.65	100.0	H	1.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	53.07	74.00	20.93	150.0	H	39.0	-5.4

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

3.1.4 Test Mode: 11N40

3.1.4.1 Channel 3 @Ant 1

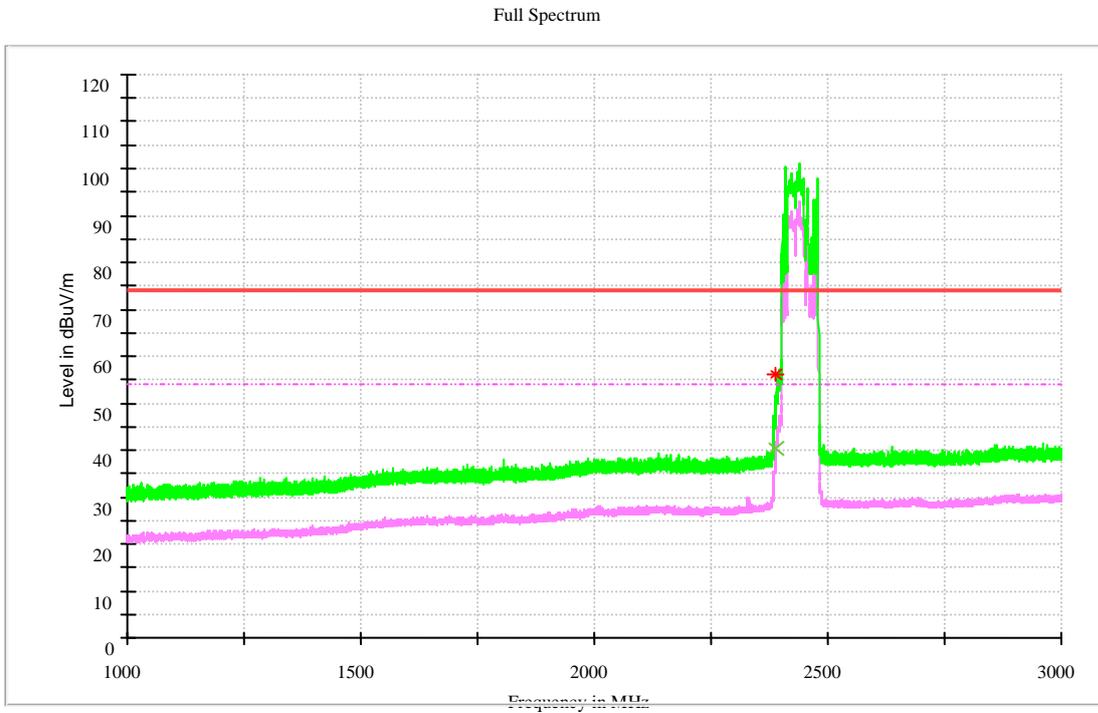

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	40.29	54.00	13.71	100.0	H	261.0	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	56.26	74.00	17.74	100.0	H	262.0	-7.6


Note2:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

3.1.4.2 Channel 9@Ant 1

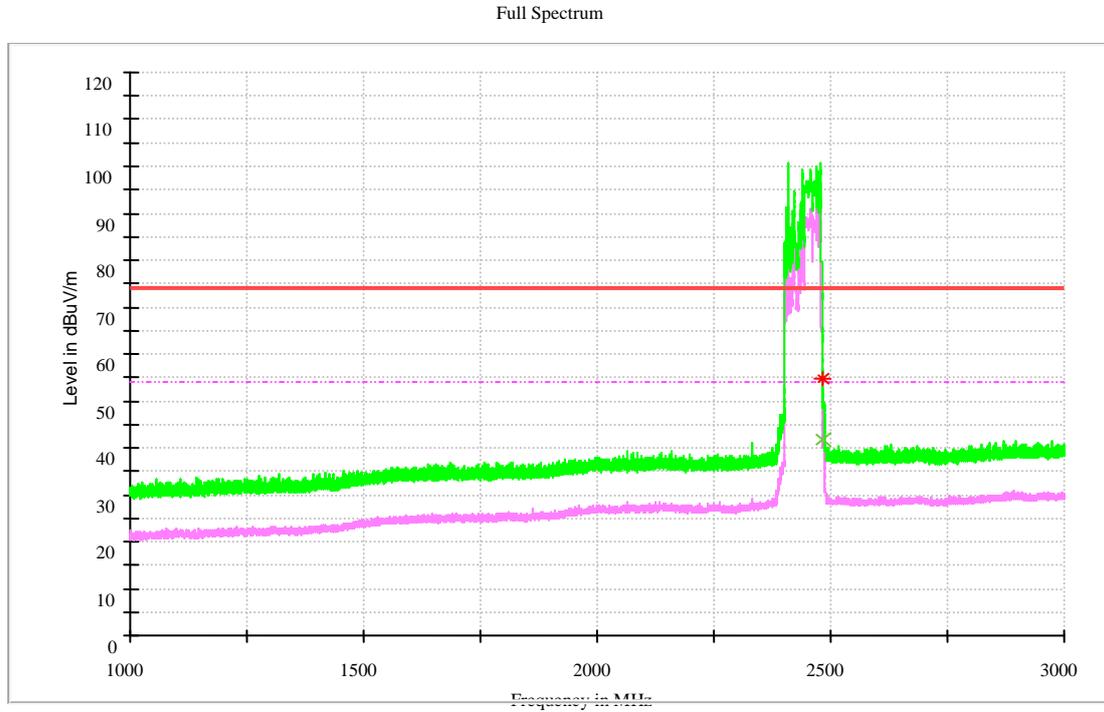

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	41.87	54.00	12.13	150.0	H	39.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	54.79	74.00	19.21	100.0	H	0.0	-5.4

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

4.1 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

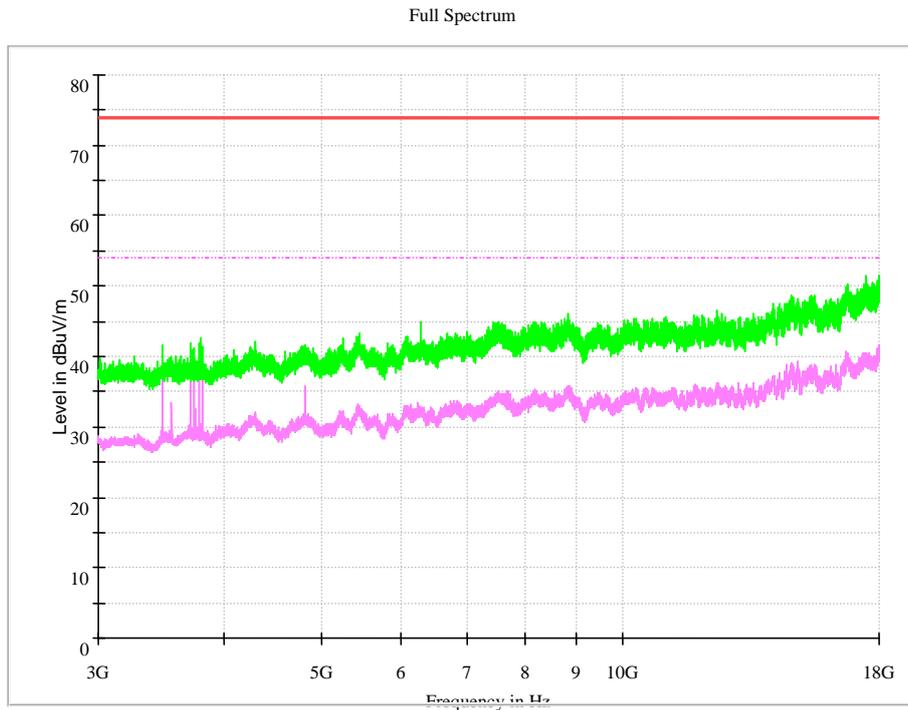




4.1 Part 5: Testing Range of "18 GHz to 26.5 GHz"

NOTE: No peak found in the Test Range of "18 GHz to 26.5GHz"

Appendix I: AC Power Line Conducted Emission

Note: RBW =9 kHz, VBW = 30 kHz

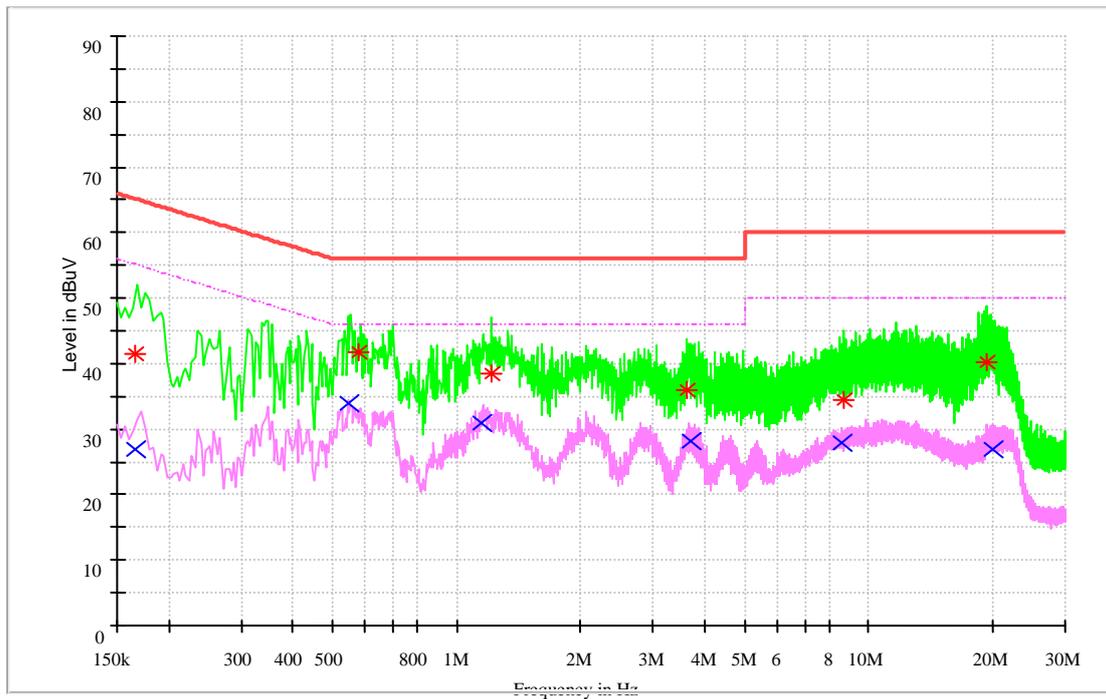

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.166514	26.88	55.13	9.7	28.25	L1	FLO
0.548381	33.95	46.00	9.7	12.05	L1	FLO
1.143236	30.91	46.00	9.7	15.09	L1	FLO
3.682077	28.18	46.00	9.8	17.82	L1	FLO
8.602742	27.81	50.00	9.9	22.19	N	FLO
20.102828	26.97	50.00	10.1	23.03	L1	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.165437	41.38	65.19	9.7	23.81	N	FLO
0.578146	41.67	56.00	9.7	14.33	L1	FLO
1.218130	38.58	56.00	9.7	17.42	L1	FLO
3.618395	36.00	56.00	9.8	20.00	L1	FLO
8.712034	34.46	60.00	9.9	25.54	N	FLO
19.397250	40.31	60.00	10.1	19.69	L1	FLO

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END