



**CORINEX COMMUNICATIONS CORP.
IN-SITU TEST REPORT**

FOR THE

BPL MEDIUM VOLTAGE ACCESS GATEWAY

**FCC PART 15, SUBPART G
SECTIONS 15.209 AND 15.109 CLASS A**

COMPLIANCE

VOLUME 4: MEDIUM VOLTAGE 2-30MHZ OVERHEAD

DATE OF ISSUE: MAY 19, 2006

PREPARED FOR:

Corinex Communications Corp.
789 West Pender Street, Suite 670
Vancouver BC V6C 1H2 Canada

PREPARED BY:

Joyce Walker & Mary Ellen Clayton
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

P.O. No.: 2006/SS/0018
W.O. No.: 84818

Date of test: March 16 - May 2, 2006

Report No.: FC06-025 Volume 4 of 9

This report contains 9 volumes. This volume contains a total of 321 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

**MEDIUM VOLTAGE 2-30MHZ OVERHEAD
MEASUREMENT DATA SHEETS**

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/28/2006
 Test Type: **Radiated Scan** Time: 11:15:26
 Equipment: **BPL MV Gateway** Sequence#: 303
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly across from the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1


Measurement Data: Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	17.185M	31.8	+0.2	+0.2	+8.4	-13.2	+0.0	27.4	29.5	-2.1	Paral
QP											
^	17.185M	34.7	+0.2	+0.2	+8.4	-13.2	+0.0	30.3	29.5	+0.8	Paral
3	23.284M	32.7	+0.2	+0.3	+7.3	-13.2	+0.0	27.3	29.5	-2.2	Paral
QP											
^	23.284M	35.8	+0.2	+0.3	+7.3	-13.2	+0.0	30.4	29.5	+0.9	Paral
5	16.714M	30.3	+0.2	+0.2	+8.4	-13.2	+0.0	25.9	29.5	-3.6	Paral
QP											
^	16.714M	33.2	+0.2	+0.2	+8.4	-13.2	+0.0	28.8	29.5	-0.7	Paral
7	22.658M	29.9	+0.2	+0.3	+7.4	-13.2	+0.0	24.6	29.5	-4.9	Paral

8	11.413M	28.6	+0.1	+0.2	+8.9	-13.2	+0.0	24.6	29.5	-4.9	Paral
9	3.106M	28.1	+0.1	+0.1	+9.3	-13.2	+0.0	24.4	29.5	-5.1	Paral
10	4.373M	28.0	+0.1	+0.2	+9.2	-13.2	+0.0	24.3	29.5	-5.2	Paral
QP											
^	4.373M	31.4	+0.1	+0.2	+9.2	-13.2	+0.0	27.7	29.5	-1.8	Paral
12	8.597M	27.4	+0.1	+0.2	+9.1	-13.2	+0.0	23.6	29.5	-5.9	Paral
13	19.225M	27.9	+0.2	+0.3	+8.2	-13.2	+0.0	23.4	29.5	-6.1	Paral
14	14.508M	27.5	+0.2	+0.2	+8.6	-13.2	+0.0	23.3	29.5	-6.2	Paral
15	7.989M	25.3	+0.1	+0.2	+9.1	-13.2	+0.0	21.5	29.5	-8.0	Paral
QP											
^	7.989M	30.1	+0.1	+0.2	+9.1	-13.2	+0.0	26.3	29.5	-3.2	Paral
17	5.475M	25.2	+0.1	+0.1	+9.2	-13.2	+0.0	21.4	29.5	-8.1	Paral
18	19.844M	25.5	+0.2	+0.3	+8.1	-13.2	+0.0	20.9	29.5	-8.6	Paral
19	21.723M	25.7	+0.2	+0.3	+7.7	-13.2	+0.0	20.7	29.5	-8.8	Paral
20	6.473M	24.0	+0.1	+0.1	+9.2	-13.2	+0.0	20.2	29.5	-9.3	Paral

Overhead Test Site #1 Date: 3/28/2006 Time: 11:15:26 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 303 Parallel
Overhead Test Site 1 Position 1 Medium Lines only. Notches off. MODE 1/2. Formal Power

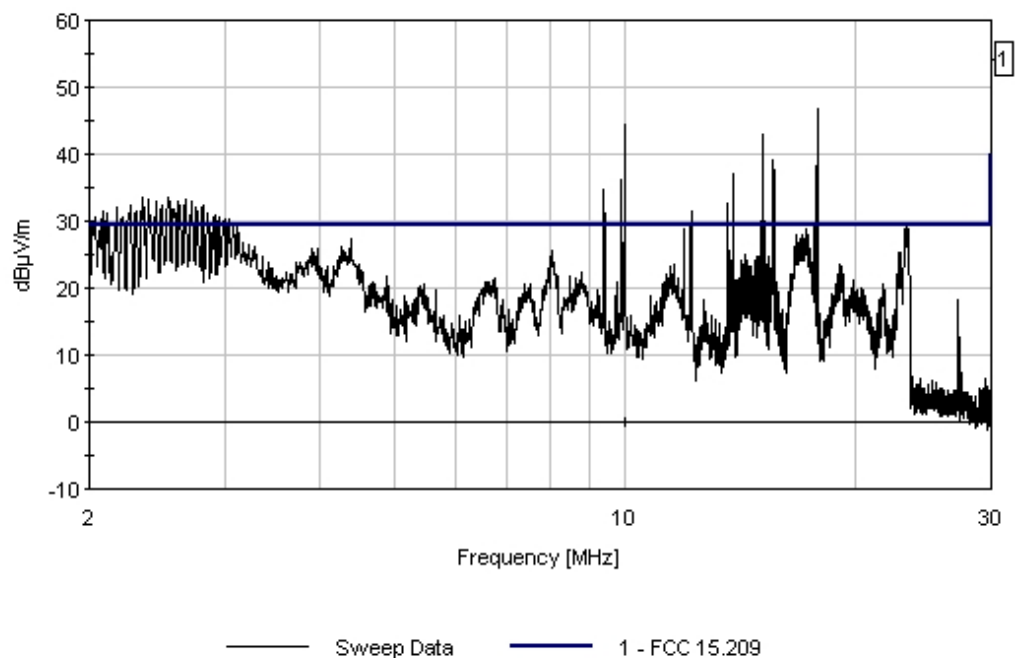

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: **Corinex**
Model: **MV Gateway**
S/N: **6749420821**

Date: 3/28/2006
Time: 11:37:50
Sequence#: 304
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly across from the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.197M	32.8	+0.2	+0.2	+8.4	-13.2	+0.0	28.4	29.5	-1.1	Perpe
QP											
^	17.197M	35.0	+0.2	+0.2	+8.4	-13.2	+0.0	30.6	29.5	+1.1	Perpe
3	16.717M	31.6	+0.2	+0.2	+8.4	-13.2	+0.0	27.1	29.5	-2.4	Perpe
QP											
^	16.717M	34.3	+0.2	+0.2	+8.4	-13.2	+0.0	29.9	29.5	+0.4	Perpe
5	17.452M	30.1	+0.2	+0.3	+8.3	-13.2	+0.0	25.7	29.5	-3.8	Perpe
QP											
^	17.452M	32.8	+0.2	+0.3	+8.3	-13.2	+0.0	28.4	29.5	-1.1	Perpe

7	4.082M	27.7	+0.1	+0.2	+9.2	-13.2	+0.0	24.0	29.5	-5.5	Perpe
QP											
^	4.082M	31.9	+0.1	+0.2	+9.2	-13.2	+0.0	28.2	29.5	-1.3	Perpe
9	15.009M	28.1	+0.2	+0.2	+8.6	-13.2	+0.0	23.9	29.5	-5.6	Perpe
QP											
^	15.009M	31.3	+0.2	+0.2	+8.6	-13.2	+0.0	27.1	29.5	-2.4	Perpe
11	22.656M	29.1	+0.2	+0.3	+7.4	-13.2	+0.0	23.8	29.5	-5.7	Perpe
12	2.972M	27.2	+0.1	+0.1	+9.3	-13.2	+0.0	23.5	29.5	-6.0	Perpe
QP											
^	2.972M	32.6	+0.1	+0.1	+9.3	-13.2	+0.0	28.9	29.5	-0.6	Perpe
14	7.347M	27.1	+0.1	+0.2	+9.2	-13.2	+0.0	23.4	29.5	-6.1	Perpe
15	16.367M	27.5	+0.2	+0.2	+8.4	-13.2	+0.0	23.1	29.5	-6.4	Perpe
QP											
^	16.367M	31.7	+0.2	+0.2	+8.4	-13.2	+0.0	27.3	29.5	-2.2	Perpe
17	19.071M	26.4	+0.2	+0.3	+8.2	-13.2	+0.0	21.9	29.5	-7.6	Perpe
18	12.702M	24.9	+0.2	+0.2	+8.8	-13.2	+0.0	20.9	29.5	-8.6	Perpe
19	11.712M	24.5	+0.1	+0.2	+8.9	-13.2	+0.0	20.5	29.5	-9.0	Perpe
20	9.732M	24.3	+0.1	+0.2	+9.1	-13.2	+0.0	20.5	29.5	-9.0	Perpe
21	8.843M	23.8	+0.1	+0.2	+9.1	-13.2	+0.0	20.0	29.5	-9.5	Perpe
22	5.740M	21.9	+0.1	+0.1	+9.2	-13.2	+0.0	18.1	29.5	-11.4	Perpe

Overhead Test Site #1 Date: 3/28/2006 Time: 11:37:50 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 304 Perpendicular
 Overhead Test Site 1 Position 1 Medium Lines only. Notches off. MODE 1/2. Formal Power

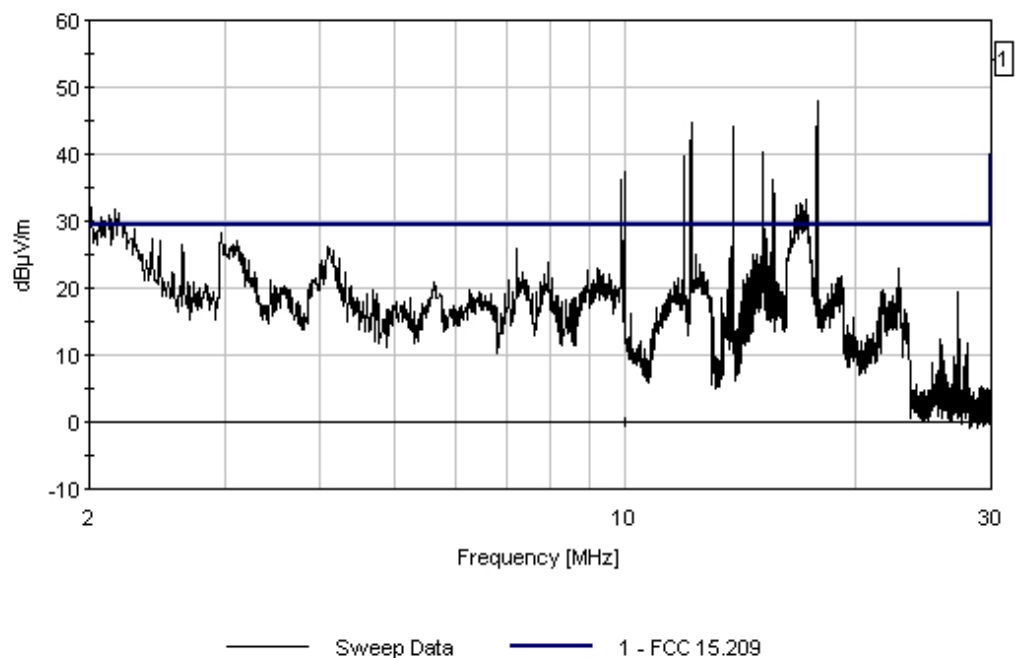

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/21/2006
 Test Type: **Radiated Scan** Time: 15:51:42
 Equipment: **BPL MV Gateway** Sequence#: 231
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	22.499M	34.6	+0.2	+0.3	+7.5	-13.2	+0.0	29.4	29.5	-0.1	Paral
QP											
^	22.499M	37.1	+0.2	+0.3	+7.5	-13.2	+0.0	31.9	29.5	+2.4	Paral
3	21.253M	33.9	+0.2	+0.3	+7.8	-13.2	+0.0	29.0	29.5	-0.5	Paral
QP											
^	21.253M	36.4	+0.2	+0.3	+7.8	-13.2	+0.0	31.5	29.5	+2.0	Paral
5	23.087M	32.4	+0.2	+0.3	+7.3	-13.2	+0.0	27.0	29.5	-2.5	Paral
QP											
^	23.087M	35.6	+0.2	+0.3	+7.3	-13.2	+0.0	30.2	29.5	+0.7	Paral

7	3.935M	29.6	+0.1	+0.2	+9.3	-13.2	+0.0	26.0	29.5	-3.5	Paral
QP											
^	3.935M	31.5	+0.1	+0.2	+9.3	-13.2	+0.0	27.9	29.5	-1.6	Paral
9	16.722M	30.4	+0.2	+0.2	+8.4	-13.2	+0.0	26.0	29.5	-3.5	Paral
QP											
^	16.722M	33.7	+0.2	+0.2	+8.4	-13.2	+0.0	29.3	29.5	-0.2	Paral
11	3.140M	28.6	+0.1	+0.1	+9.3	-13.2	+0.0	24.9	29.5	-4.6	Paral
QP											
^	3.140M	32.8	+0.1	+0.1	+9.3	-13.2	+0.0	29.1	29.5	-0.4	Paral
13	18.457M	28.0	+0.2	+0.3	+8.2	-13.2	+0.0	23.5	29.5	-6.0	Paral
QP											
^	18.457M	31.3	+0.2	+0.3	+8.2	-13.2	+0.0	26.8	29.5	-2.7	Paral
15	6.566M	26.4	+0.1	+0.2	+9.2	-13.2	+0.0	22.7	29.5	-6.8	Paral

Overhead Test Site #1 Date: 3/21/2006 Time: 15:51:42 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 231 Parallel
Overhead Test Site 1 Position 2 Medium Lines only. Notches off. Formal Power

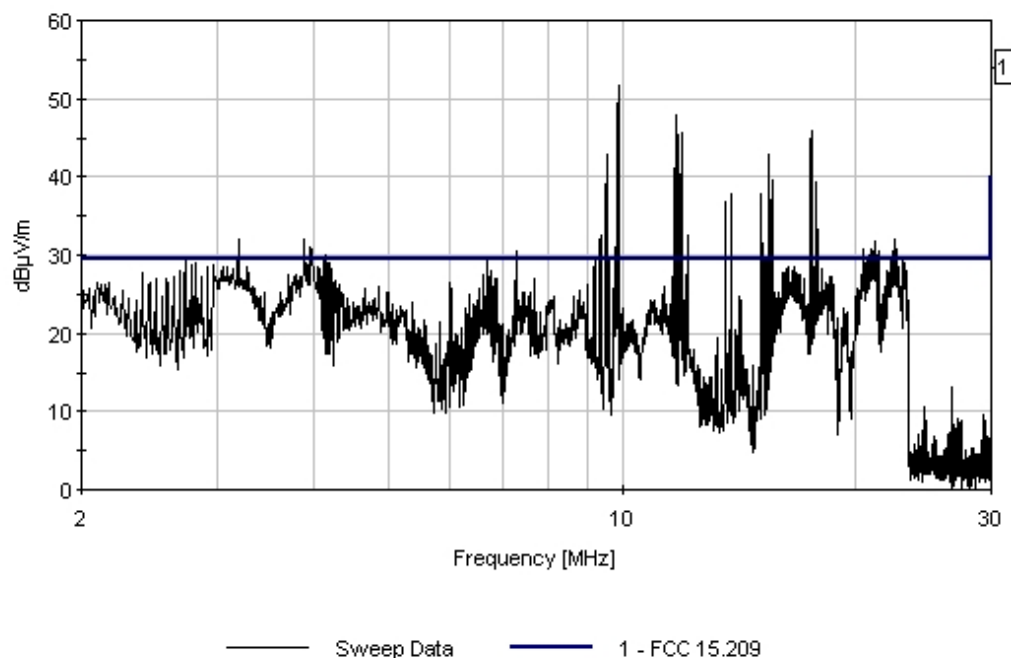

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/21/2006
 Test Type: **Radiated Scan** Time: 16:31:07
 Equipment: **BPL MV Gateway** Sequence#: 233
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.191M	33.1	+0.2	+0.2	+8.4	-13.2	+0.0	28.7	29.5	-0.8	Perpe
QP											
^	17.191M	35.8	+0.2	+0.2	+8.4	-13.2	+0.0	31.4	29.5	+1.9	Perpe
3	20.883M	33.3	+0.2	+0.3	+7.9	-13.2	+0.0	28.5	29.5	-1.0	Perpe
QP											
^	20.883M	36.3	+0.2	+0.3	+7.9	-13.2	+0.0	31.5	29.5	+2.0	Perpe
5	3.273M	31.5	+0.1	+0.1	+9.3	-13.2	+0.0	27.8	29.5	-1.7	Perpe
QP											
^	3.273M	34.1	+0.1	+0.1	+9.3	-13.2	+0.0	30.4	29.5	+0.9	Perpe

7	18.751M	32.1	+0.2	+0.3	+8.2	-13.2	+0.0	27.6	29.5	-1.9	Perpe
QP											
^	18.751M	34.8	+0.2	+0.3	+8.2	-13.2	+0.0	30.3	29.5	+0.8	Perpe
9	8.905M	30.8	+0.1	+0.2	+9.1	-13.2	+0.0	27.0	29.5	-2.5	Perpe
QP											
^	8.905M	34.7	+0.1	+0.2	+9.1	-13.2	+0.0	30.9	29.5	+1.4	Perpe
11	14.688M	30.6	+0.2	+0.2	+8.6	-13.2	+0.0	26.4	29.5	-3.1	Perpe
QP											
^	14.688M	33.3	+0.2	+0.2	+8.6	-13.2	+0.0	29.1	29.5	-0.4	Perpe
13	15.949M	30.6	+0.2	+0.2	+8.5	-13.2	+0.0	26.3	29.5	-3.2	Perpe
QP											
^	15.949M	33.1	+0.2	+0.2	+8.5	-13.2	+0.0	28.8	29.5	-0.7	Perpe
15	4.285M	29.5	+0.1	+0.2	+9.2	-13.2	+0.0	25.8	29.5	-3.7	Perpe
16	6.892M	29.3	+0.1	+0.2	+9.2	-13.2	+0.0	25.6	29.5	-3.9	Perpe
17	19.216M	29.7	+0.2	+0.3	+8.2	-13.2	+0.0	25.1	29.5	-4.4	Perpe
QP											
^	19.216M	32.3	+0.2	+0.3	+8.2	-13.2	+0.0	27.8	29.5	-1.7	Perpe
19	20.475M	29.3	+0.2	+0.3	+8.0	-13.2	+0.0	24.6	29.5	-4.9	Perpe
QP											
^	20.475M	32.4	+0.2	+0.3	+8.0	-13.2	+0.0	27.7	29.5	-1.8	Perpe
21	9.746M	28.4	+0.1	+0.2	+9.1	-13.2	+0.0	24.6	29.5	-4.9	Perpe
22	8.422M	27.8	+0.1	+0.2	+9.1	-13.2	+0.0	24.0	29.5	-5.5	Perpe
23	23.287M	28.9	+0.2	+0.3	+7.3	-13.2	+0.0	23.5	29.5	-6.0	Perpe
QP											
^	23.287M	32.2	+0.2	+0.3	+7.3	-13.2	+0.0	26.8	29.5	-2.7	Perpe
25	4.832M	26.8	+0.1	+0.1	+9.2	-13.2	+0.0	23.0	29.5	-6.5	Perpe
QP											
^	4.832M	31.1	+0.1	+0.1	+9.2	-13.2	+0.0	27.2	29.5	-2.3	Perpe

Overhead Test Site #1 Date: 3/21/2006 Time: 16:31:07 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 233 Perpendicular
Overhead Test Site 1 Position 2 Medium Lines only, Notches off, Formal Power

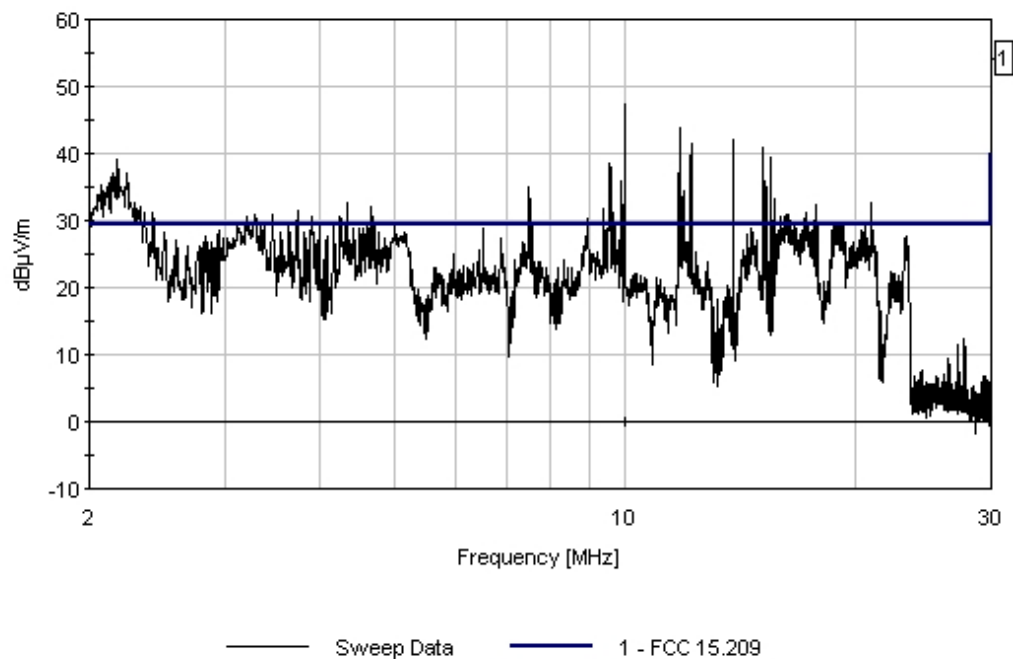

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/28/2006
 Test Type: **Radiated Scan** Time: 10:50:34
 Equipment: **BPL MV Gateway** Sequence#: 301
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.184M	31.2	+0.2	+0.2	+8.4	-13.2	+0.0	26.8	29.5	-2.7	Perpe
QP											
^	17.184M	34.1	+0.2	+0.2	+8.4	-13.2	+0.0	29.7	29.5	+0.2	Perpe
3	4.067M	29.9	+0.1	+0.2	+9.2	-13.2	+0.0	26.2	29.5	-3.3	Perpe
QP											
^	4.067M	32.7	+0.1	+0.2	+9.2	-13.2	+0.0	29.0	29.5	-0.5	Perpe
5	16.713M	29.6	+0.2	+0.2	+8.4	-13.2	+0.0	25.2	29.5	-4.3	Perpe
QP											
^	16.713M	32.4	+0.2	+0.2	+8.4	-13.2	+0.0	27.9	29.5	-1.6	Perpe
7	8.127M	28.9	+0.1	+0.2	+9.1	-13.2	+0.0	25.1	29.5	-4.4	Perpe

8	12.347M	28.5	+0.2	+0.2	+8.8	-13.2	+0.0	24.5	29.5	-5.0	Perpe
QP											
^	12.347M	31.3	+0.2	+0.2	+8.8	-13.2	+0.0	27.3	29.5	-2.2	Perpe
10	17.957M	28.4	+0.2	+0.3	+8.3	-13.2	+0.0	24.0	29.5	-5.5	Perpe
QP											
^	17.957M	31.1	+0.2	+0.3	+8.3	-13.2	+0.0	26.7	29.5	-2.8	Perpe
12	13.822M	28.1	+0.2	+0.2	+8.7	-13.2	+0.0	24.0	29.5	-5.5	Perpe
QP											
^	13.822M	35.4	+0.2	+0.2	+8.7	-13.2	+0.0	31.2	29.5	+1.7	Perpe
14	19.067M	27.5	+0.2	+0.3	+8.2	-13.2	+0.0	23.0	29.5	-6.5	Perpe
QP											
^	19.067M	30.3	+0.2	+0.3	+8.2	-13.2	+0.0	25.8	29.5	-3.7	Perpe
16	21.732M	27.8	+0.2	+0.3	+7.7	-13.2	+0.0	22.8	29.5	-6.7	Perpe
QP											
^	21.732M	30.7	+0.2	+0.3	+7.7	-13.2	+0.0	25.7	29.5	-3.8	Perpe
18	18.381M	27.0	+0.2	+0.3	+8.2	-13.2	+0.0	22.5	29.5	-7.0	Perpe
QP											
^	18.381M	30.2	+0.2	+0.3	+8.2	-13.2	+0.0	25.7	29.5	-3.8	Perpe
20	9.721M	26.0	+0.1	+0.2	+9.1	-13.2	+0.0	22.2	29.5	-7.3	Perpe
21	14.793M	26.3	+0.2	+0.2	+8.6	-13.2	+0.0	22.1	29.5	-7.4	Perpe
QP											
^	14.793M	30.8	+0.2	+0.2	+8.6	-13.2	+0.0	26.6	29.5	-2.9	Perpe
23	6.490M	25.7	+0.1	+0.2	+9.2	-13.2	+0.0	22.0	29.5	-7.5	Perpe
24	11.318M	25.3	+0.1	+0.2	+8.9	-13.2	+0.0	21.3	29.5	-8.2	Perpe
25	8.911M	23.8	+0.1	+0.2	+9.1	-13.2	+0.0	20.0	29.5	-9.5	Perpe
26	23.437M	23.0	+0.2	+0.3	+7.2	-13.2	+0.0	17.5	29.5	-12.0	Perpe

Overhead Test Site #1 Date: 3/28/2006 Time: 10:50:34 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 301 Perpendicular
 Overhead Test Site 1 Position 3 Medium Lines only. Notches off. MODE 1/2. Formal Power

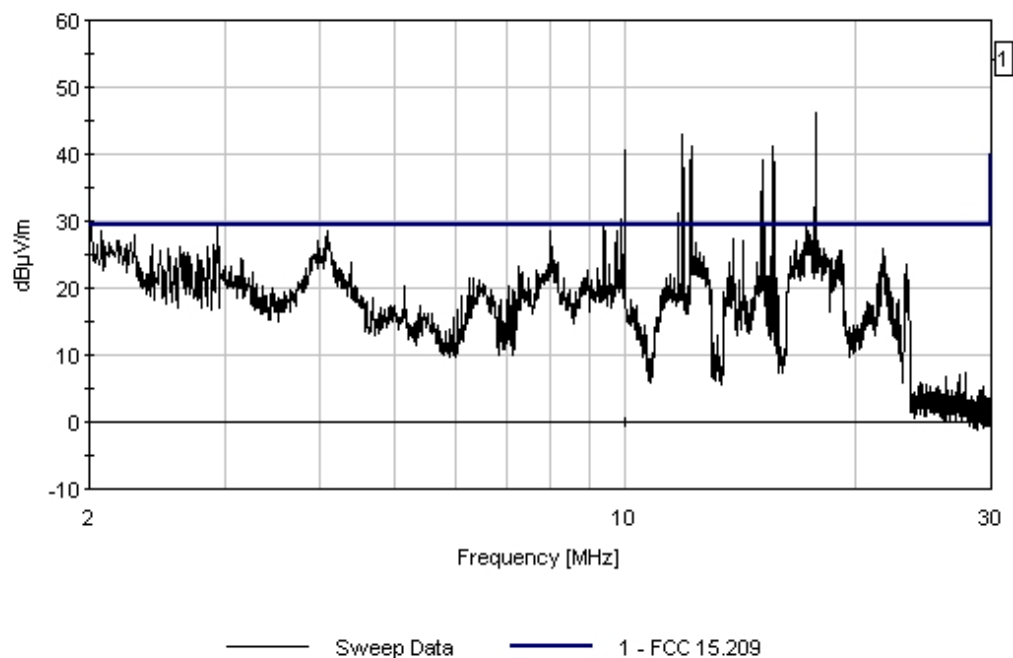

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: **Corinex**
Model: **MV Gateway**
S/N: **6749420821**

Date: 3/28/2006
Time: 10:58:13
Sequence#: 302
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	16.405M	33.8	+0.2	+0.2	+8.4	-13.2	+0.0	29.4	29.5	-0.1	Paral
QP											
^	16.405M	37.1	+0.2	+0.2	+8.4	-13.2	+0.0	32.7	29.5	+3.2	Paral
3	17.185M	33.3	+0.2	+0.2	+8.4	-13.2	+0.0	28.8	29.5	-0.7	Paral
QP											
^	17.185M	36.4	+0.2	+0.2	+8.4	-13.2	+0.0	32.0	29.5	+2.5	Paral
5	12.349M	30.0	+0.2	+0.2	+8.8	-13.2	+0.0	26.0	29.5	-3.5	Paral
QP											
^	12.349M	32.5	+0.2	+0.2	+8.8	-13.2	+0.0	28.5	29.5	-1.0	Paral

7	14.843M	29.4	+0.2	+0.2	+8.6	-13.2	+0.0	25.2	29.5	-4.3	Paral
QP											
^	14.843M	33.5	+0.2	+0.2	+8.6	-13.2	+0.0	29.3	29.5	-0.2	Paral
9	10.940M	28.6	+0.1	+0.2	+9.0	-13.2	+0.0	24.7	29.5	-4.8	Paral
10	15.939M	28.2	+0.2	+0.2	+8.5	-13.2	+0.0	23.9	29.5	-5.6	Paral
QP											
^	15.939M	31.0	+0.2	+0.2	+8.5	-13.2	+0.0	26.7	29.5	-2.8	Paral
12	3.061M	27.4	+0.1	+0.1	+9.3	-13.2	+0.0	23.7	29.5	-5.8	Paral
13	7.663M	27.1	+0.1	+0.2	+9.1	-13.2	+0.0	23.3	29.5	-6.2	Paral
14	17.956M	27.4	+0.2	+0.3	+8.3	-13.2	+0.0	23.0	29.5	-6.5	Paral
QP											
^	17.956M	30.8	+0.2	+0.3	+8.3	-13.2	+0.0	26.4	29.5	-3.1	Paral
16	11.298M	26.8	+0.1	+0.2	+8.9	-13.2	+0.0	22.8	29.5	-6.7	Paral
QP											
^	11.298M	31.3	+0.1	+0.2	+8.9	-13.2	+0.0	27.3	29.5	-2.2	Paral
18	19.073M	27.0	+0.2	+0.3	+8.2	-13.2	+0.0	22.5	29.5	-7.0	Paral
19	21.724M	25.7	+0.2	+0.3	+7.7	-13.2	+0.0	20.7	29.5	-8.8	Paral
20	22.661M	24.3	+0.2	+0.3	+7.4	-13.2	+0.0	19.0	29.5	-10.5	Paral
21	23.447M	23.8	+0.2	+0.3	+7.2	-13.2	+0.0	18.3	29.5	-11.2	Paral

Overhead Test Site #1 Date: 3/28/2006 Time: 10:58:13 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 302 Parallel
Overhead Test Site 1 Position 3 Medium Lines only. Notches off. MODE 1/2. Formal Power

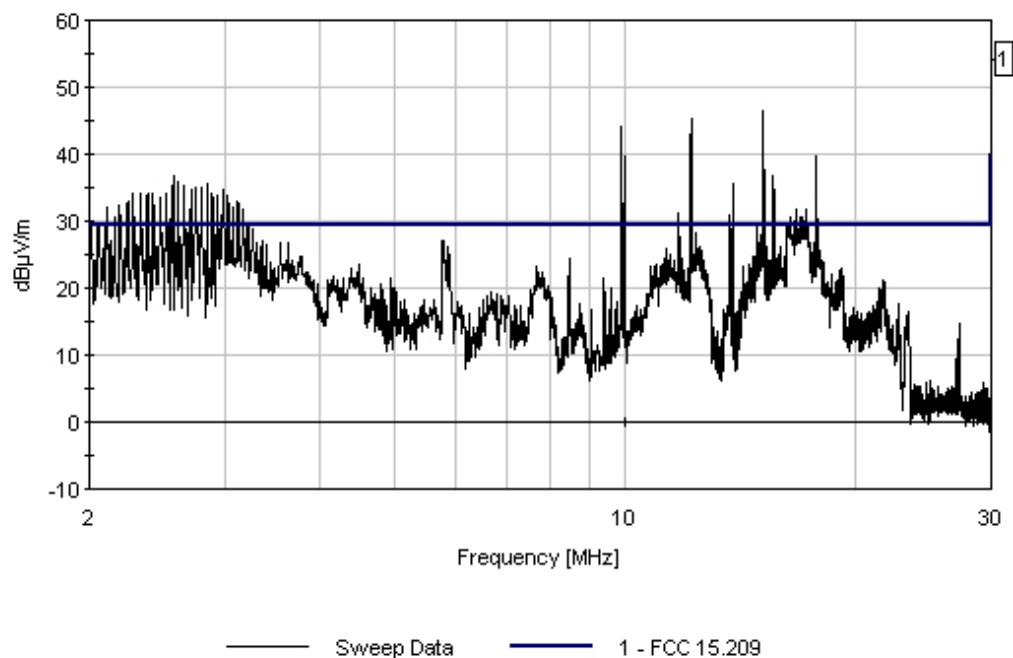

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/28/2006
 Test Type: **Radiated Scan** Time: 10:26:15
 Equipment: **BPL MV Gateway** Sequence#: 299
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	22.659M	32.9	+0.2	+0.3	+7.4	-13.2	+0.0	27.5	29.5	-2.0	Paral
QP											
^	22.659M	35.9	+0.2	+0.3	+7.4	-13.2	+0.0	30.6	29.5	+1.1	Paral
3	21.728M	30.7	+0.2	+0.3	+7.7	-13.2	+0.0	25.7	29.5	-3.8	Paral
QP											
^	21.728M	33.6	+0.2	+0.3	+7.7	-13.2	+0.0	28.6	29.5	-0.9	Paral
5	18.345M	29.9	+0.2	+0.3	+8.3	-13.2	+0.0	25.5	29.5	-4.0	Paral

6	23.085M	30.8	+0.2	+0.3	+7.3	-13.2	+0.0	25.4	29.5	-4.1	Paral
QP											
^	23.085M	33.7	+0.2	+0.3	+7.3	-13.2	+0.0	28.3	29.5	-1.2	Paral
8	21.387M	30.2	+0.2	+0.3	+7.7	-13.2	+0.0	25.2	29.5	-4.3	Paral
QP											
^	21.387M	33.2	+0.2	+0.3	+7.7	-13.2	+0.0	28.2	29.5	-1.3	Paral
10	19.068M	28.8	+0.2	+0.3	+8.2	-13.2	+0.0	24.3	29.5	-5.2	Paral
11	16.263M	28.5	+0.2	+0.2	+8.5	-13.2	+0.0	24.2	29.5	-5.3	Paral
QP											
^	16.263M	32.3	+0.2	+0.2	+8.5	-13.2	+0.0	28.0	29.5	-1.5	Paral
13	4.380M	27.5	+0.1	+0.2	+9.2	-13.2	+0.0	23.8	29.5	-5.7	Paral
QP											
^	4.380M	31.6	+0.1	+0.2	+9.2	-13.2	+0.0	27.9	29.5	-1.6	Paral
15	12.659M	27.1	+0.2	+0.2	+8.8	-13.2	+0.0	23.1	29.5	-6.4	Paral
QP											
^	12.659M	29.7	+0.2	+0.2	+8.8	-13.2	+0.0	25.7	29.5	-3.8	Paral
17	8.745M	26.9	+0.1	+0.2	+9.1	-13.2	+0.0	23.1	29.5	-6.4	Paral
QP											
^	8.745M	30.2	+0.1	+0.2	+9.1	-13.2	+0.0	26.3	29.5	-3.2	Paral
19	7.665M	26.7	+0.1	+0.2	+9.1	-13.2	+0.0	22.9	29.5	-6.6	Paral
20	3.548M	26.4	+0.1	+0.2	+9.3	-13.2	+0.0	22.8	29.5	-6.7	Paral
21	11.559M	26.7	+0.1	+0.2	+8.9	-13.2	+0.0	22.6	29.5	-6.9	Paral
QP											
^	11.559M	30.1	+0.1	+0.2	+8.9	-13.2	+0.0	26.1	29.5	-3.4	Paral
23	5.408M	24.5	+0.1	+0.1	+9.2	-13.2	+0.0	20.7	29.5	-8.8	Paral

Overhead Test Site #1 Date: 3/28/2006 Time: 10:26:15 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 299 Parallel
 Overhead Test Site 1 Position 4 Medium Lines only. Notches off. MODE 1/2. Formal Power

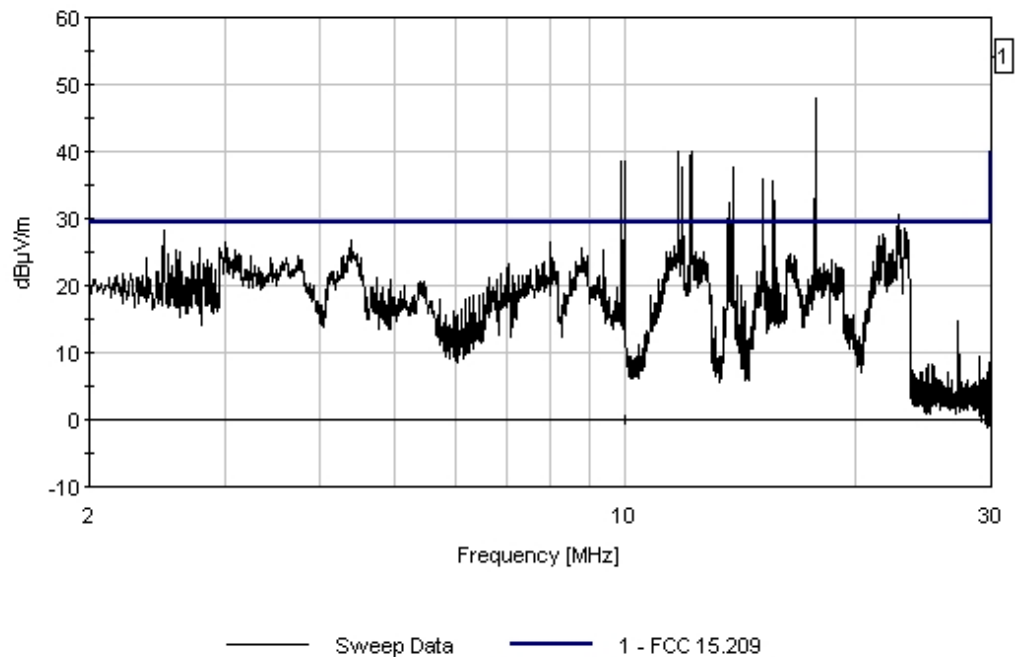

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: Corinex
 Model: MV Gateway
 S/N: 6749420821

Date: 3/28/2006
 Time: 10:35:10
 Sequence#: 300
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	19.068M	31.4	+0.2	+0.3	+8.2	-13.2	+0.0	26.9	29.5	-2.6	Perpe
QP											
^	19.068M	34.0	+0.2	+0.3	+8.2	-13.2	+0.0	29.5	29.5	+0.0	Perpe
3	4.070M	29.8	+0.1	+0.2	+9.2	-13.2	+0.0	26.1	29.5	-3.4	Perpe
QP											
^	4.070M	33.6	+0.1	+0.2	+9.2	-13.2	+0.0	29.9	29.5	+0.4	Perpe
5	8.131M	28.9	+0.1	+0.2	+9.1	-13.2	+0.0	25.1	29.5	-4.4	Perpe
6	23.287M	29.8	+0.2	+0.3	+7.3	-13.2	+0.0	24.4	29.5	-5.1	Perpe
QP											
^	23.287M	33.2	+0.2	+0.3	+7.3	-13.2	+0.0	27.8	29.5	-1.7	Perpe

8	17.954M	28.7	+0.2	+0.3	+8.3	-13.2	+0.0	24.3	29.5	-5.2	Perpe
QP											
^	17.954M	32.1	+0.2	+0.3	+8.3	-13.2	+0.0	27.7	29.5	-1.8	Perpe
10	21.728M	27.9	+0.2	+0.3	+7.7	-13.2	+0.0	22.9	29.5	-6.6	Perpe
11	22.660M	27.9	+0.2	+0.3	+7.4	-13.2	+0.0	22.6	29.5	-6.9	Perpe
QP											
^	22.660M	31.3	+0.2	+0.3	+7.4	-13.2	+0.0	26.0	29.5	-3.5	Perpe
13	17.397M	25.3	+0.2	+0.3	+8.3	-13.2	+0.0	20.9	29.5	-8.6	Perpe
14	14.532M	24.5	+0.2	+0.2	+8.6	-13.2	+0.0	20.3	29.5	-9.2	Perpe
15	6.541M	21.3	+0.1	+0.2	+9.2	-13.2	+0.0	17.6	29.5	-11.9	Perpe
16	11.420M	21.4	+0.1	+0.2	+8.9	-13.2	+0.0	17.4	29.5	-12.1	Perpe
17	10.332M	19.6	+0.1	+0.2	+9.1	-13.2	+0.0	15.8	29.5	-13.7	Perpe
18	9.683M	19.6	+0.1	+0.2	+9.1	-13.2	+0.0	15.8	29.5	-13.7	Perpe
19	12.773M	18.5	+0.2	+0.2	+8.8	-13.2	+0.0	14.5	29.5	-15.0	Perpe

Overhead Test Site #1 Date: 3/28/2006 Time: 10:35:10 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 300 Perpendicular
Overhead Test Site 1 Position 4 Medium Lines only. Notches off. MODE 1/2. Formal Power

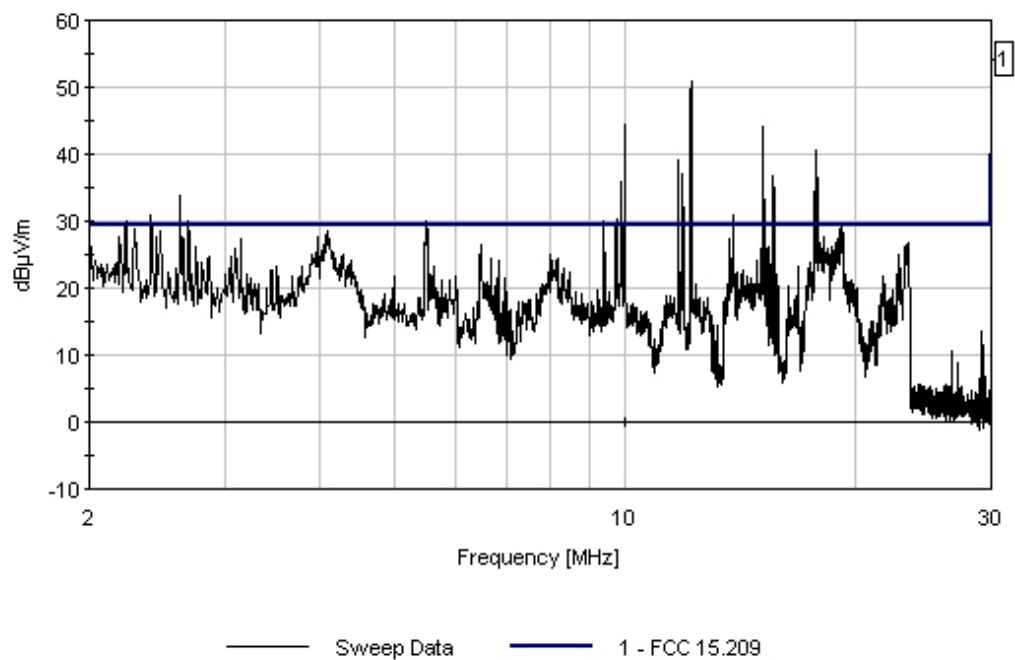

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 16:31:08
 Equipment: **BPL MV Gateway** Sequence#: 293
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	15.936M	33.1	+0.2	+0.2	+8.5	-13.2	+0.0	28.8	29.5	-0.7	Paral
QP											
^	15.936M	35.0	+0.2	+0.2	+8.5	-13.2	+0.0	30.7	29.5	+1.2	Paral
3	11.559M	32.1	+0.1	+0.2	+8.9	-13.2	+0.0	28.1	29.5	-1.4	Paral
QP											
^	11.559M	35.2	+0.1	+0.2	+8.9	-13.2	+0.0	31.2	29.5	+1.7	Paral
5	21.724M	31.8	+0.2	+0.3	+7.7	-13.2	+0.0	26.8	29.5	-2.7	Paral
QP											
^	21.724M	34.5	+0.2	+0.3	+7.7	-13.2	+0.0	29.5	29.5	+0.0	Paral

7	4.375M	30.2	+0.1	+0.2	+9.2	-13.2	+0.0	26.5	29.5	-3.0	Paral
QP											
^	4.375M	34.0	+0.1	+0.2	+9.2	-13.2	+0.0	30.3	29.5	+0.8	Paral
9	3.748M	30.0	+0.1	+0.2	+9.3	-13.2	+0.0	26.4	29.5	-3.1	Paral
QP											
^	3.748M	33.5	+0.1	+0.2	+9.3	-13.2	+0.0	29.9	29.5	+0.4	Paral
11	5.162M	29.5	+0.1	+0.1	+9.2	-13.2	+0.0	25.7	29.5	-3.8	Paral
QP											
^	5.162M	33.3	+0.1	+0.1	+9.2	-13.2	+0.0	29.5	29.5	+0.0	Paral
13	17.964M	29.0	+0.2	+0.3	+8.3	-13.2	+0.0	24.6	29.5	-4.9	Paral
14	23.157M	29.8	+0.2	+0.3	+7.3	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	23.157M	32.9	+0.2	+0.3	+7.3	-13.2	+0.0	27.5	29.5	-2.0	Paral
16	8.597M	28.1	+0.1	+0.2	+9.1	-13.2	+0.0	24.3	29.5	-5.2	Paral
QP											
^	8.597M	32.1	+0.1	+0.2	+9.1	-13.2	+0.0	28.3	29.5	-1.2	Paral
18	22.666M	29.1	+0.2	+0.3	+7.4	-13.2	+0.0	23.8	29.5	-5.7	Paral
QP											
^	22.666M	31.9	+0.2	+0.3	+7.4	-13.2	+0.0	26.6	29.5	-2.9	Paral
20	18.339M	27.9	+0.2	+0.3	+8.3	-13.2	+0.0	23.5	29.5	-6.0	Paral
21	8.012M	26.6	+0.1	+0.2	+9.1	-13.2	+0.0	22.8	29.5	-6.7	Paral
QP											
^	8.012M	36.5	+0.1	+0.2	+9.1	-13.2	+0.0	32.7	29.5	+3.2	Paral
23	12.034M	26.8	+0.1	+0.2	+8.9	-13.2	+0.0	22.8	29.5	-6.7	Paral
24	18.759M	26.7	+0.2	+0.3	+8.2	-13.2	+0.0	22.2	29.5	-7.3	Paral
25	14.819M	25.9	+0.2	+0.2	+8.6	-13.2	+0.0	21.7	29.5	-7.8	Paral
26	12.424M	25.4	+0.2	+0.2	+8.8	-13.2	+0.0	21.4	29.5	-8.1	Paral
27	19.759M	24.6	+0.2	+0.3	+8.1	-13.2	+0.0	20.0	29.5	-9.5	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 16:31:08 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 293 Parallel
 Overhead Test Site 1 Position 5 Medium Lines only. Notches off. MODE 1/2. Formal Power

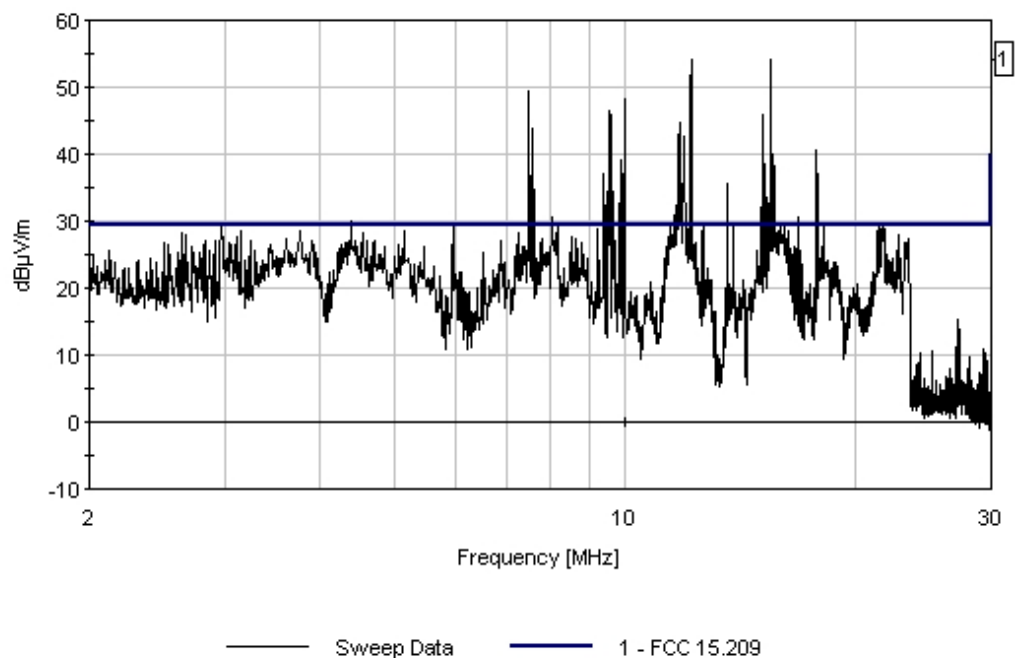

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 16:41:13
 Sequence#: 294
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	11.564M	31.3	+0.1	+0.2	+8.9	-13.2	+0.0	27.3	29.5	-2.2	Perpe
QP											
^	11.564M	34.3	+0.1	+0.2	+8.9	-13.2	+0.0	30.3	29.5	+0.8	Perpe
3	10.779M	30.5	+0.1	+0.2	+9.0	-13.2	+0.0	26.6	29.5	-2.9	Perpe
QP											
^	10.779M	33.3	+0.1	+0.2	+9.0	-13.2	+0.0	29.4	29.5	-0.1	Perpe
5	3.946M	28.7	+0.1	+0.2	+9.3	-13.2	+0.0	25.1	29.5	-4.4	Perpe
QP											
^	3.946M	36.3	+0.1	+0.2	+9.3	-13.2	+0.0	32.7	29.5	+3.2	Perpe

7	15.941M	29.3	+0.2	+0.2	+8.5	-13.2	+0.0	25.0	29.5	-4.5	Perpe
QP											
^	15.941M	32.1	+0.2	+0.2	+8.5	-13.2	+0.0	27.8	29.5	-1.7	Perpe
9	8.126M	28.5	+0.1	+0.2	+9.1	-13.2	+0.0	24.7	29.5	-4.8	Perpe
QP											
^	8.126M	31.8	+0.1	+0.2	+9.1	-13.2	+0.0	28.0	29.5	-1.5	Perpe
11	5.158M	27.6	+0.1	+0.1	+9.2	-13.2	+0.0	23.8	29.5	-5.7	Perpe
QP											
^	5.158M	31.5	+0.1	+0.1	+9.2	-13.2	+0.0	27.7	29.5	-1.8	Perpe
13	4.881M	27.2	+0.1	+0.1	+9.2	-13.2	+0.0	23.4	29.5	-6.1	Perpe
QP											
^	4.881M	34.4	+0.1	+0.1	+9.2	-13.2	+0.0	30.6	29.5	+1.1	Perpe
15	5.472M	25.4	+0.1	+0.1	+9.2	-13.2	+0.0	21.6	29.5	-7.9	Perpe
QP											
^	5.472M	29.8	+0.1	+0.1	+9.2	-13.2	+0.0	26.0	29.5	-3.5	Perpe
17	21.366M	26.5	+0.2	+0.3	+7.7	-13.2	+0.0	21.5	29.5	-8.0	Perpe
18	23.096M	26.4	+0.2	+0.3	+7.3	-13.2	+0.0	21.0	29.5	-8.5	Perpe
19	22.661M	26.1	+0.2	+0.3	+7.4	-13.2	+0.0	20.8	29.5	-8.7	Perpe
20	6.984M	23.9	+0.1	+0.2	+9.2	-13.2	+0.0	20.2	29.5	-9.3	Perpe
QP											
^	6.984M	32.0	+0.1	+0.2	+9.2	-13.2	+0.0	28.3	29.5	-1.2	Perpe
22	14.794M	23.0	+0.2	+0.2	+8.6	-13.2	+0.0	18.8	29.5	-10.7	Perpe
23	12.599M	21.8	+0.2	+0.2	+8.8	-13.2	+0.0	17.8	29.5	-11.7	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 16:41:13 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 294 Perpendicular
 Overhead Test Site 1 Position 5 Medium Lines only. Notches off. MODE 1/2. Formal Power

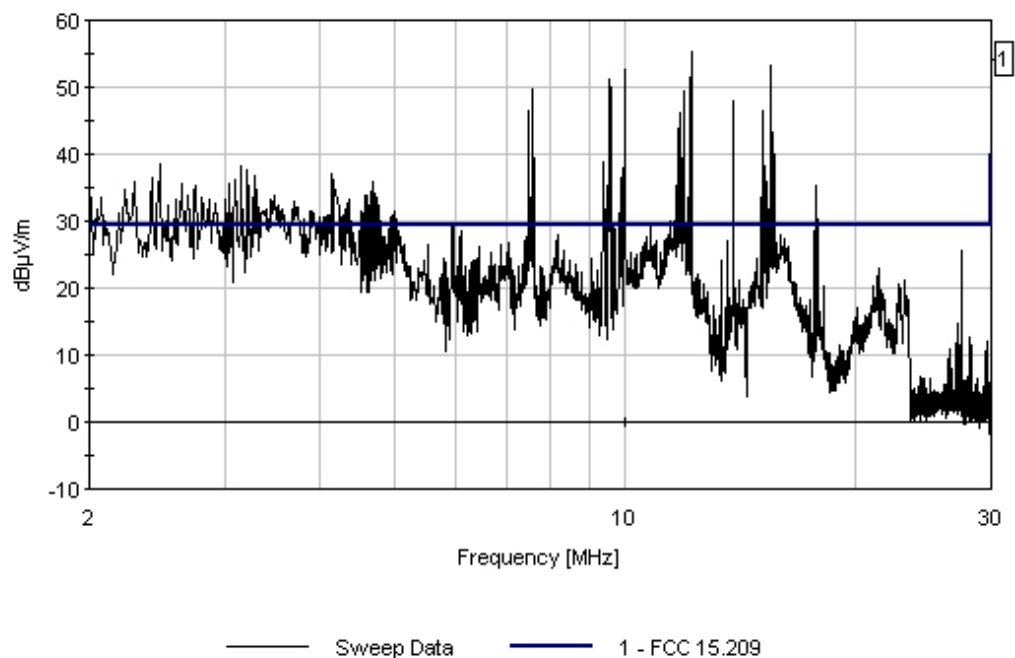

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: Corinex
 Model: MV Gateway
 S/N: 6749420821

Date: 3/28/2006
 Time: 10:01:10
 Sequence#: 297
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	5.473M	30.1	+0.1	+0.1	+9.2	-13.2	+0.0	26.2	29.5	-3.3	Paral
QP											
^	5.473M	33.3	+0.1	+0.1	+9.2	-13.2	+0.0	29.5	29.5	+0.0	Paral
3	18.124M	30.5	+0.2	+0.3	+8.3	-13.2	+0.0	26.1	29.5	-3.4	Paral
QP											
^	18.124M	33.1	+0.2	+0.3	+8.3	-13.2	+0.0	28.7	29.5	-0.8	Paral
5	11.562M	29.8	+0.1	+0.2	+8.9	-13.2	+0.0	25.8	29.5	-3.7	Paral
QP											
^	11.562M	33.0	+0.1	+0.2	+8.9	-13.2	+0.0	29.0	29.5	-0.5	Paral

7	19.102M	29.3	+0.2	+0.3	+8.2	-13.2	+0.0	24.8	29.5	-4.7	Paral
QP											
^	19.102M	32.8	+0.2	+0.3	+8.2	-13.2	+0.0	28.3	29.5	-1.2	Paral
9	21.654M	29.4	+0.2	+0.3	+7.7	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	21.654M	33.3	+0.2	+0.3	+7.7	-13.2	+0.0	28.3	29.5	-1.2	Paral
11	12.656M	28.4	+0.2	+0.2	+8.8	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	12.656M	30.8	+0.2	+0.2	+8.8	-13.2	+0.0	26.8	29.5	-2.7	Paral
13	4.376M	28.1	+0.1	+0.2	+9.2	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	4.376M	32.1	+0.1	+0.2	+9.2	-13.2	+0.0	28.4	29.5	-1.1	Paral
15	23.439M	28.4	+0.2	+0.3	+7.2	-13.2	+0.0	22.9	29.5	-6.6	Paral
QP											
^	23.439M	31.7	+0.2	+0.3	+7.2	-13.2	+0.0	26.2	29.5	-3.3	Paral
17	17.337M	26.7	+0.2	+0.3	+8.3	-13.2	+0.0	22.3	29.5	-7.2	Paral
18	19.840M	26.7	+0.2	+0.3	+8.1	-13.2	+0.0	22.1	29.5	-7.4	Paral
19	8.046M	25.8	+0.1	+0.2	+9.1	-13.2	+0.0	22.0	29.5	-7.5	Paral
20	6.421M	23.7	+0.1	+0.1	+9.2	-13.2	+0.0	19.9	29.5	-9.6	Paral

Overhead Test Site #1 Date: 3/28/2006 Time: 10:01:10 Corinex WVO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 297 Parallel
 Overhead Test Site 1 Position 6 Medium Lines only. Notches off. MODE 1/2. Formal Power

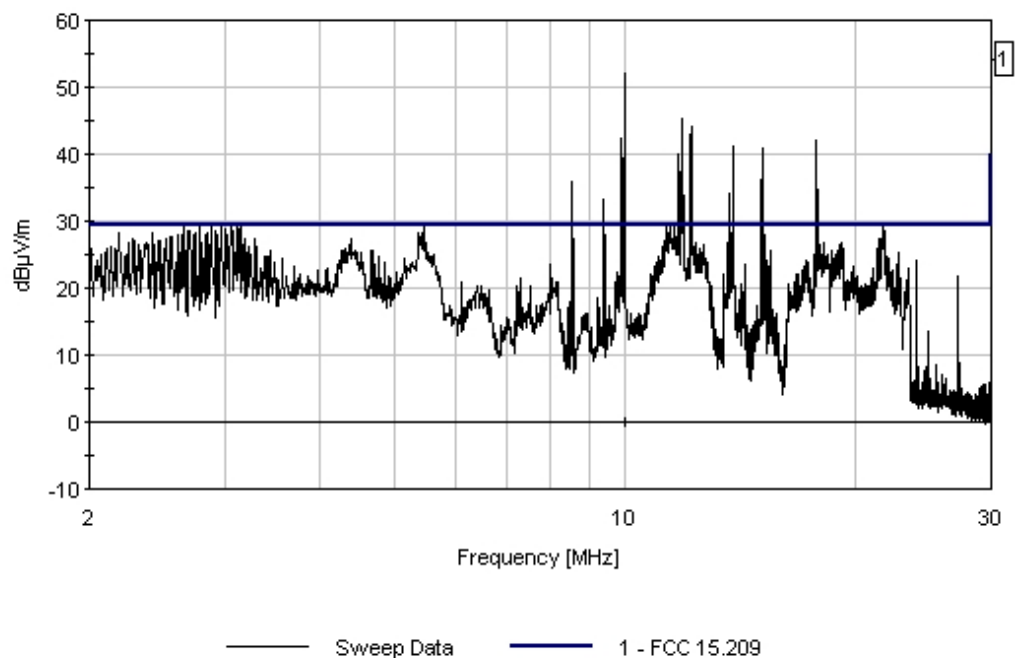

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/28/2006
 Time: 10:06:26
 Sequence#: 298
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	11.297M	28.8	+0.1	+0.2	+8.9	-13.2	+0.0	24.8	29.5	-4.7	Perpe
2	17.953M	27.0	+0.2	+0.3	+8.3	-13.2	+0.0	22.6	29.5	-6.9	Perpe
3	14.994M	26.8	+0.2	+0.2	+8.6	-13.2	+0.0	22.6	29.5	-6.9	Perpe
4	4.086M	26.2	+0.1	+0.2	+9.2	-13.2	+0.0	22.5	29.5	-7.0	Perpe
QP	4.086M	30.5	+0.1	+0.2	+9.2	-13.2	+0.0	26.8	29.5	-2.7	Perpe
6	21.373M	27.1	+0.2	+0.3	+7.7	-13.2	+0.0	22.1	29.5	-7.4	Perpe

7	22.659M	26.4	+0.2	+0.3	+7.4	-13.2	+0.0	21.1	29.5	-8.4	Perpe
8	6.910M	24.4	+0.1	+0.2	+9.2	-13.2	+0.0	20.7	29.5	-8.8	Perpe
9	5.376M	23.8	+0.1	+0.1	+9.2	-13.2	+0.0	20.0	29.5	-9.5	Perpe
10	12.347M	23.5	+0.2	+0.2	+8.8	-13.2	+0.0	19.5	29.5	-10.0	Perpe
11	16.258M	23.4	+0.2	+0.2	+8.5	-13.2	+0.0	19.1	29.5	-10.4	Perpe
12	23.057M	22.8	+0.2	+0.3	+7.3	-13.2	+0.0	17.4	29.5	-12.1	Perpe

Overhead Test Site #1 Date: 3/28/2006 Time: 10:06:26 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 298 Perpendicular
Overhead Test Site 1 Position 6 Medium Lines only. Notches off. MODE 1/2. Formal Power

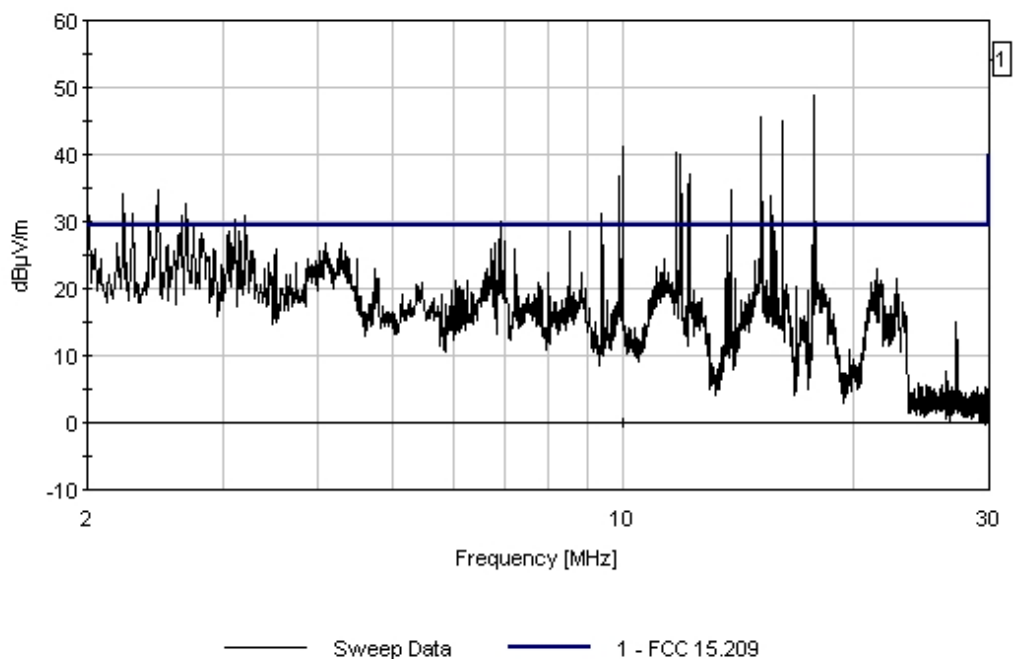

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 15:53:19
 Sequence#: 289
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1


Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.955M	33.8	+0.2	+0.3	+8.3	-13.2	+0.0	29.3	29.5	-0.2	Paral
QP											
^	17.955M	36.9	+0.2	+0.3	+8.3	-13.2	+0.0	32.5	29.5	+3.0	Paral
3	3.123M	32.9	+0.1	+0.1	+9.3	-13.2	+0.0	29.2	29.5	-0.3	Paral
QP											
^	3.123M	39.6	+0.1	+0.1	+9.3	-13.2	+0.0	35.9	29.5	+6.4	Paral
5	21.383M	32.5	+0.2	+0.3	+7.7	-13.2	+0.0	27.5	29.5	-2.0	Paral
QP											
^	21.383M	35.1	+0.2	+0.3	+7.7	-13.2	+0.0	30.1	29.5	+0.6	Paral

7	5.158M	30.0	+0.1	+0.1	+9.2	-13.2	+0.0	26.2	29.5	-3.3	Paral
QP											
^	5.158M	34.1	+0.1	+0.1	+9.2	-13.2	+0.0	30.3	29.5	+0.8	Paral
9	21.634M	31.1	+0.2	+0.3	+7.7	-13.2	+0.0	26.1	29.5	-3.4	Paral
QP											
^	21.634M	34.8	+0.2	+0.3	+7.7	-13.2	+0.0	29.8	29.5	+0.3	Paral
11	14.847M	30.1	+0.2	+0.2	+8.6	-13.2	+0.0	25.9	29.5	-3.6	Paral
QP											
^	14.847M	33.2	+0.2	+0.2	+8.6	-13.2	+0.0	29.0	29.5	-0.5	Paral
13	10.775M	29.6	+0.1	+0.2	+9.0	-13.2	+0.0	25.7	29.5	-3.8	Paral
QP											
^	10.775M	32.3	+0.1	+0.2	+9.0	-13.2	+0.0	28.4	29.5	-1.1	Paral
15	14.225M	29.1	+0.2	+0.2	+8.7	-13.2	+0.0	25.0	29.5	-4.5	Paral
16	23.336M	30.3	+0.2	+0.3	+7.3	-13.2	+0.0	24.9	29.5	-4.6	Paral
17	22.660M	29.7	+0.2	+0.3	+7.4	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	22.660M	33.2	+0.2	+0.3	+7.4	-13.2	+0.0	27.9	29.5	-1.6	Paral
19	17.483M	28.8	+0.2	+0.3	+8.3	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	17.483M	31.2	+0.2	+0.3	+8.3	-13.2	+0.0	26.8	29.5	-2.7	Paral
21	3.938M	28.0	+0.1	+0.2	+9.3	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	3.938M	34.0	+0.1	+0.2	+9.3	-13.2	+0.0	30.4	29.5	+0.9	Paral
23	11.412M	28.1	+0.1	+0.2	+8.9	-13.2	+0.0	24.1	29.5	-5.4	Paral
QP											
^	11.412M	31.4	+0.1	+0.2	+8.9	-13.2	+0.0	27.4	29.5	-2.1	Paral
25	7.661M	27.8	+0.1	+0.2	+9.1	-13.2	+0.0	24.0	29.5	-5.5	Paral
QP											
^	7.661M	32.2	+0.1	+0.2	+9.1	-13.2	+0.0	28.4	29.5	-1.1	Paral
27	18.585M	27.7	+0.2	+0.3	+8.2	-13.2	+0.0	23.2	29.5	-6.3	Paral
28	7.031M	26.9	+0.1	+0.2	+9.2	-13.2	+0.0	23.2	29.5	-6.3	Paral
QP											
^	7.031M	31.8	+0.1	+0.2	+9.2	-13.2	+0.0	28.1	29.5	-1.4	Paral

30	16.090M	26.9	+0.2	+0.2	+8.5	-13.2	+0.0	22.6	29.5	-6.9	Paral
QP											
^	16.090M	30.2	+0.2	+0.2	+8.5	-13.2	+0.0	25.9	29.5	-3.6	Paral
32	12.297M	24.4	+0.2	+0.2	+8.8	-13.2	+0.0	20.4	29.5	-9.1	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 15:53:19 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 289 Parallel
Overhead Test Site 1 Position 7 Medium Lines only. Notches off. MODE 1/2. Formal Power

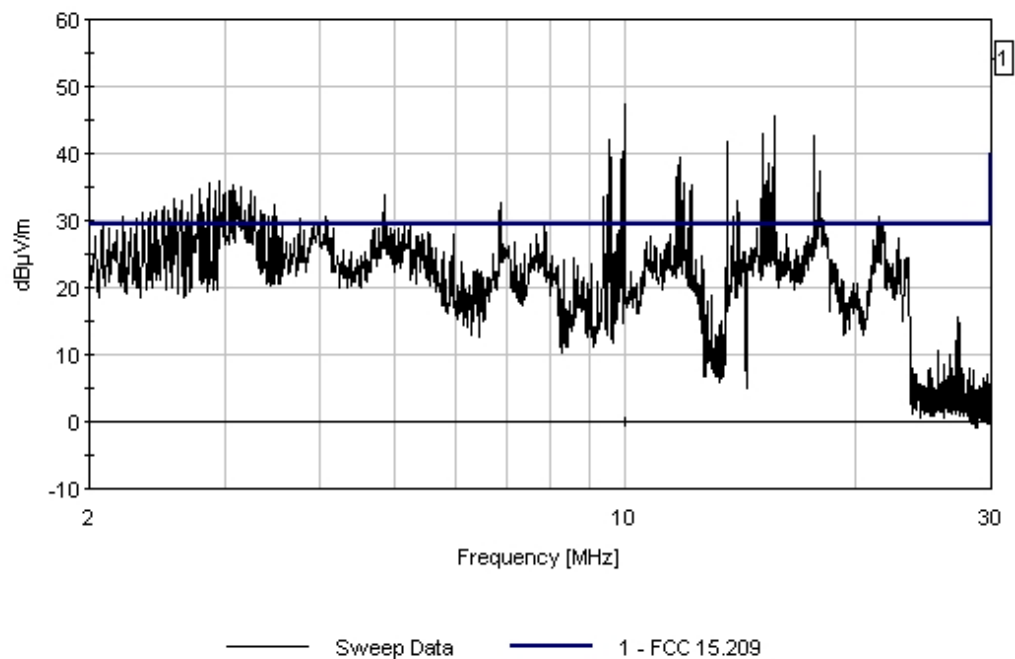

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 15:40:08
 Sequence#: 290
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	11.410M	32.7	+0.1	+0.2	+8.9	-13.2	+0.0	28.7	29.5	-0.8	Perpe
QP											
^	11.410M	36.1	+0.1	+0.2	+8.9	-13.2	+0.0	32.1	29.5	+2.6	Perpe
3	23.088M	31.3	+0.2	+0.3	+7.3	-13.2	+0.0	25.9	29.5	-3.6	Perpe
QP											
^	23.088M	34.3	+0.2	+0.3	+7.3	-13.2	+0.0	28.9	29.5	-0.6	Perpe
5	7.655M	27.6	+0.1	+0.2	+9.1	-13.2	+0.0	23.8	29.5	-5.7	Perpe
6	10.310M	27.5	+0.1	+0.2	+9.1	-13.2	+0.0	23.7	29.5	-5.8	Perpe

7	22.660M	28.2	+0.2	+0.3	+7.4	-13.2	+0.0	22.9	29.5	-6.6	Perpe
QP											
^	22.660M	31.4	+0.2	+0.3	+7.4	-13.2	+0.0	26.1	29.5	-3.4	Perpe
9	20.886M	27.1	+0.2	+0.3	+7.9	-13.2	+0.0	22.3	29.5	-7.2	Perpe
10	6.907M	26.0	+0.1	+0.2	+9.2	-13.2	+0.0	22.3	29.5	-7.2	Perpe
QP											
^	6.907M	29.9	+0.1	+0.2	+9.2	-13.2	+0.0	26.2	29.5	-3.3	Perpe
12	21.734M	26.9	+0.2	+0.3	+7.7	-13.2	+0.0	21.9	29.5	-7.6	Perpe
13	21.386M	26.3	+0.2	+0.3	+7.7	-13.2	+0.0	21.3	29.5	-8.2	Perpe
14	14.217M	24.5	+0.2	+0.2	+8.7	-13.2	+0.0	20.4	29.5	-9.1	Perpe
15	12.235M	24.1	+0.1	+0.2	+8.9	-13.2	+0.0	20.1	29.5	-9.4	Perpe
16	16.267M	24.3	+0.2	+0.2	+8.5	-13.2	+0.0	19.9	29.5	-9.6	Perpe
17	3.920M	22.5	+0.1	+0.2	+9.3	-13.2	+0.0	18.9	29.5	-10.6	Perpe
18	3.268M	21.3	+0.1	+0.1	+9.3	-13.2	+0.0	17.6	29.5	-11.9	Perpe
19	20.101M	22.0	+0.2	+0.3	+8.1	-13.2	+0.0	17.4	29.5	-12.1	Perpe
20	5.008M	20.2	+0.1	+0.1	+9.2	-13.2	+0.0	16.4	29.5	-13.1	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 15:40:08 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 290 Perpendicular
 Overhead Test Site 1 Position 7 Medium Lines only. Notches off. MODE 1/2. Formal Power

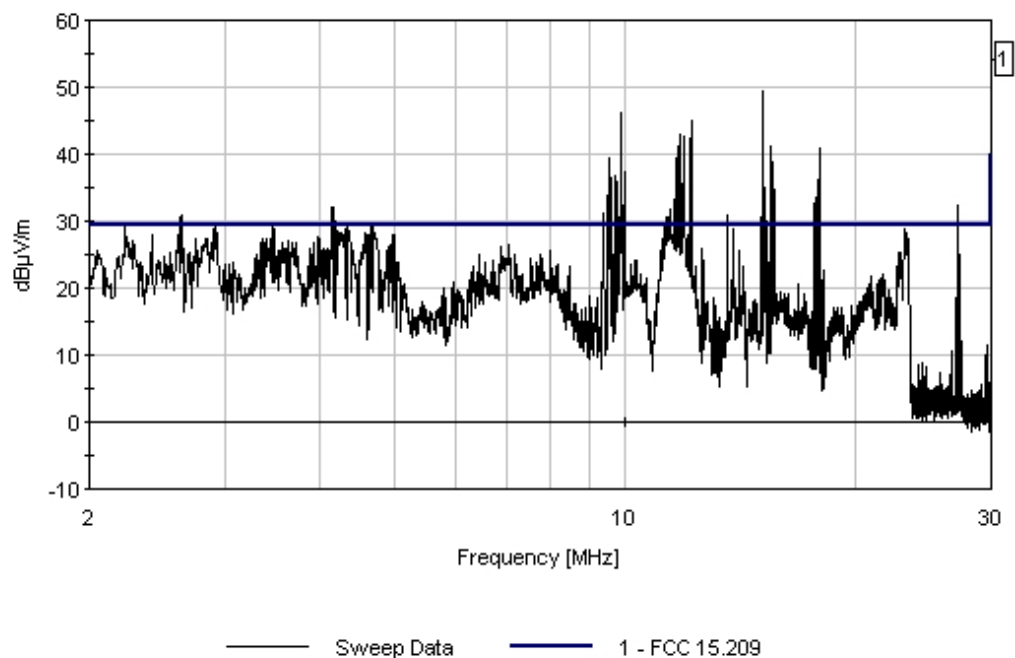

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/28/2006
 Test Type: **Radiated Scan** Time: 09:38:03
 Equipment: **BPL MV Gateway** Sequence#: 295
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	7.664M	32.9	+0.1	+0.2	+9.1	-13.2	+0.0	29.1	29.5	-0.4	Perpe
QP											
^	7.664M	41.4	+0.1	+0.2	+9.1	-13.2	+0.0	37.6	29.5	+8.1	Perpe
3	6.752M	32.9	+0.1	+0.2	+9.2	-13.2	+0.0	29.1	29.5	-0.4	Perpe
QP											
^	6.752M	36.4	+0.1	+0.2	+9.2	-13.2	+0.0	32.7	29.5	+3.2	Perpe
5	5.474M	32.7	+0.1	+0.1	+9.2	-13.2	+0.0	28.9	29.5	-0.6	Perpe
QP											
^	5.474M	38.0	+0.1	+0.1	+9.2	-13.2	+0.0	34.2	29.5	+4.7	Perpe

7	11.562M	32.5	+0.1	+0.2	+8.9	-13.2	+0.0	28.5	29.5	-1.0	Perpe
QP											
^	11.562M	35.4	+0.1	+0.2	+8.9	-13.2	+0.0	31.4	29.5	+1.9	Perpe
9	12.348M	32.0	+0.2	+0.2	+8.8	-13.2	+0.0	28.0	29.5	-1.5	Perpe
QP											
^	12.348M	34.5	+0.2	+0.2	+8.8	-13.2	+0.0	30.5	29.5	+1.0	Perpe
11	4.118M	29.6	+0.1	+0.2	+9.2	-13.2	+0.0	25.9	29.5	-3.6	Perpe
QP											
^	4.118M	36.1	+0.1	+0.2	+9.2	-13.2	+0.0	32.3	29.5	+2.8	Perpe
13	8.744M	29.6	+0.1	+0.2	+9.1	-13.2	+0.0	25.8	29.5	-3.7	Perpe
QP											
^	8.744M	33.4	+0.1	+0.2	+9.1	-13.2	+0.0	29.6	29.5	+0.1	Perpe
15	16.338M	29.0	+0.2	+0.2	+8.5	-13.2	+0.0	24.7	29.5	-4.8	Perpe
16	14.373M	28.8	+0.2	+0.2	+8.7	-13.2	+0.0	24.7	29.5	-4.8	Perpe
17	10.589M	28.6	+0.1	+0.2	+9.0	-13.2	+0.0	24.7	29.5	-4.8	Perpe
QP											
^	10.589M	31.4	+0.1	+0.2	+9.0	-13.2	+0.0	27.5	29.5	-2.0	Perpe
19	3.556M	28.3	+0.1	+0.2	+9.3	-13.2	+0.0	24.7	29.5	-4.8	Perpe
QP											
^	3.556M	35.5	+0.1	+0.2	+9.3	-13.2	+0.0	31.9	29.5	+2.4	Perpe
21	21.726M	29.4	+0.2	+0.3	+7.7	-13.2	+0.0	24.4	29.5	-5.1	Perpe
QP											
^	21.726M	32.3	+0.2	+0.3	+7.7	-13.2	+0.0	27.3	29.5	-2.2	Perpe
23	17.453M	28.4	+0.2	+0.3	+8.3	-13.2	+0.0	24.0	29.5	-5.5	Perpe
QP											
^	17.453M	30.7	+0.2	+0.3	+8.3	-13.2	+0.0	26.2	29.5	-3.3	Perpe
25	20.000M	28.1	+0.2	+0.3	+8.1	-13.2	+0.0	23.4	29.5	-6.1	Perpe
QP											
^	20.000M	31.8	+0.2	+0.3	+8.1	-13.2	+0.0	27.2	29.5	-2.3	Perpe
27	17.955M	27.3	+0.2	+0.3	+8.3	-13.2	+0.0	22.9	29.5	-6.6	Perpe
QP											
^	17.955M	30.4	+0.2	+0.3	+8.3	-13.2	+0.0	26.0	29.5	-3.5	Perpe
29	23.158M	28.0	+0.2	+0.3	+7.3	-13.2	+0.0	22.6	29.5	-6.9	Perpe
QP											
^	23.158M	31.4	+0.2	+0.3	+7.3	-13.2	+0.0	26.0	29.5	-3.5	Perpe

Overhead Test Site #1 Date: 3/28/2006 Time: 09:38:03 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 295 Perpendicular
 Overhead Test Site 1 Position 8 Medium Lines only. Notches off. MODE 1/2. Formal Power

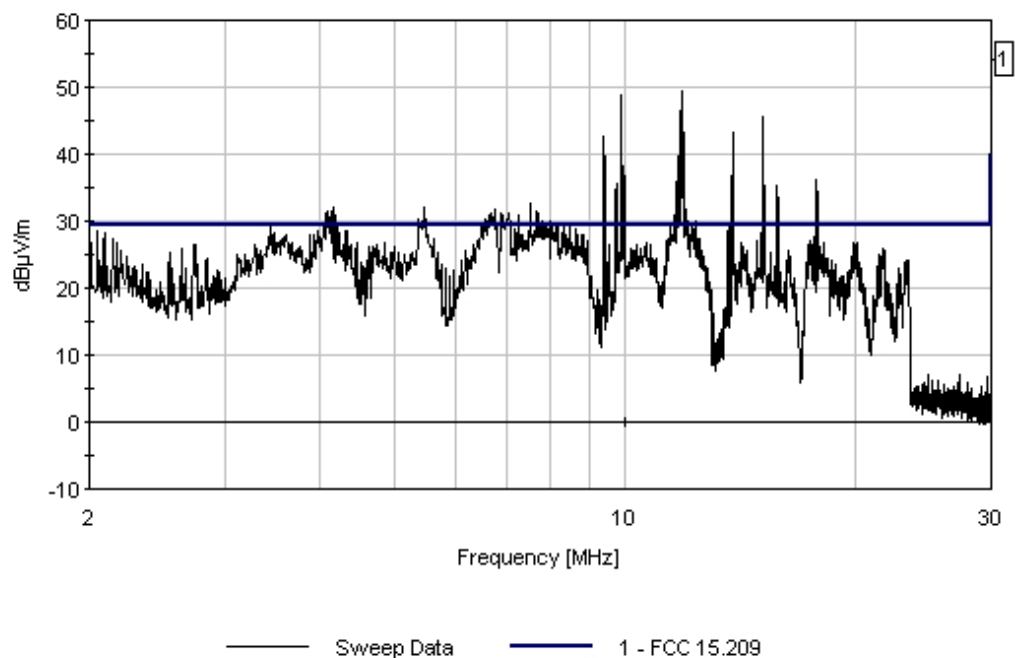

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/28/2006
 Time: 09:49:39
 Sequence#: 296
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.956M	32.9	+0.2	+0.3	+8.3	-13.2	+0.0	28.5	29.5	-1.0	Paral
QP											
^	17.956M	35.8	+0.2	+0.3	+8.3	-13.2	+0.0	31.4	29.5	+1.9	Paral
3	21.099M	29.2	+0.2	+0.3	+7.8	-13.2	+0.0	24.3	29.5	-5.2	Paral
4	19.844M	28.8	+0.2	+0.3	+8.1	-13.2	+0.0	24.2	29.5	-5.3	Paral
5	8.130M	27.9	+0.1	+0.2	+9.1	-13.2	+0.0	24.1	29.5	-5.4	Paral
6	4.066M	27.8	+0.1	+0.2	+9.2	-13.2	+0.0	24.1	29.5	-5.4	Paral

7	6.557M	27.6	+0.1	+0.2	+9.2	-13.2	+0.0	23.9	29.5	-5.6	Paral
QP											
^	6.557M	31.0	+0.1	+0.2	+9.2	-13.2	+0.0	27.3	29.5	-2.2	Paral
9	16.820M	28.1	+0.2	+0.2	+8.4	-13.2	+0.0	23.7	29.5	-5.8	Paral
QP											
^	16.820M	33.0	+0.2	+0.2	+8.4	-13.2	+0.0	28.6	29.5	-0.9	Paral
11	17.340M	27.7	+0.2	+0.3	+8.3	-13.2	+0.0	23.3	29.5	-6.2	Paral
QP											
^	17.340M	31.1	+0.2	+0.3	+8.3	-13.2	+0.0	26.7	29.5	-2.8	Paral
13	14.537M	27.1	+0.2	+0.2	+8.6	-13.2	+0.0	22.9	29.5	-6.6	Paral
QP											
^	14.537M	30.2	+0.2	+0.2	+8.6	-13.2	+0.0	26.0	29.5	-3.5	Paral
15	23.440M	28.2	+0.2	+0.3	+7.2	-13.2	+0.0	22.7	29.5	-6.8	Paral
16	3.128M	25.9	+0.1	+0.1	+9.3	-13.2	+0.0	22.2	29.5	-7.3	Paral
QP											
^	3.128M	30.2	+0.1	+0.1	+9.3	-13.2	+0.0	26.5	29.5	-3.0	Paral
18	5.474M	24.5	+0.1	+0.1	+9.2	-13.2	+0.0	20.7	29.5	-8.8	Paral
QP											
^	5.474M	30.4	+0.1	+0.1	+9.2	-13.2	+0.0	26.6	29.5	-2.9	Paral
20	11.412M	19.7	+0.1	+0.2	+8.9	-13.2	+0.0	15.7	29.5	-13.8	Paral

Overhead Test Site #1 Date: 3/28/2006 Time: 09:49:39 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 296 Parallel
 Overhead Test Site 1 Position 8 Medium Lines only. Notches off. MODE 1/2. Formal Power

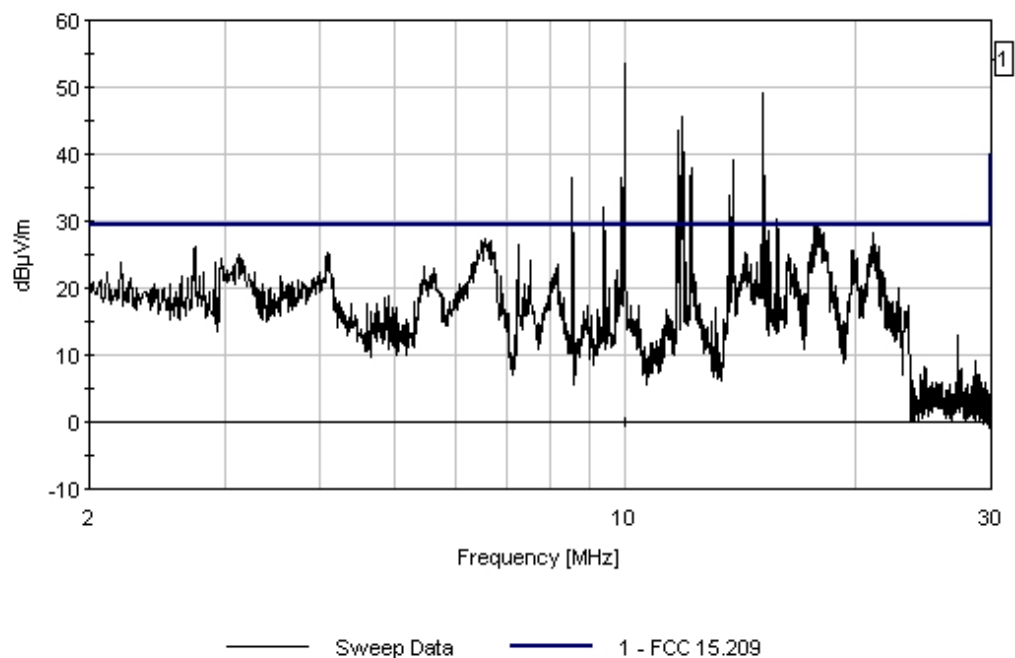

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: **Corinex**
Model: **MV Gateway**
S/N: **6749420821**

Date: 3/23/2006
Time: 14:39:39
Sequence#: 285
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 53.47 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	5.163M	33.0	+0.1	+0.1	+9.2	-13.2	+0.0	29.2	29.5	-0.3	Paral
QP											
^	5.163M	36.0	+0.1	+0.1	+9.2	-13.2	+0.0	32.2	29.5	+2.7	Paral
3	4.374M	31.9	+0.1	+0.2	+9.2	-13.2	+0.0	28.2	29.5	-1.3	Paral
QP											
^	4.374M	35.7	+0.1	+0.2	+9.2	-13.2	+0.0	32.0	29.5	+2.5	Paral
5	8.127M	30.6	+0.1	+0.2	+9.1	-13.2	+0.0	26.8	29.5	-2.7	Paral
QP											
^	8.127M	33.5	+0.1	+0.2	+9.1	-13.2	+0.0	29.7	29.5	+0.2	Paral

7	11.416M	30.1	+0.1	+0.2	+8.9	-13.2	+0.0	26.1	29.5	-3.4	Paral
QP											
^	11.416M	32.8	+0.1	+0.2	+8.9	-13.2	+0.0	28.8	29.5	-0.7	Paral
9	12.189M	30.0	+0.1	+0.2	+8.9	-13.2	+0.0	26.0	29.5	-3.5	Paral
QP											
^	12.189M	33.2	+0.1	+0.2	+8.9	-13.2	+0.0	29.2	29.5	-0.3	Paral
11	3.606M	29.4	+0.1	+0.2	+9.3	-13.2	+0.0	25.8	29.5	-3.7	Paral
QP											
^	3.606M	32.9	+0.1	+0.2	+9.3	-13.2	+0.0	29.3	29.5	-0.2	Paral
13	14.845M	29.0	+0.2	+0.2	+8.6	-13.2	+0.0	24.8	29.5	-4.7	Paral
QP											
^	14.845M	31.8	+0.2	+0.2	+8.6	-13.2	+0.0	27.6	29.5	-1.9	Paral
15	6.985M	27.1	+0.1	+0.2	+9.2	-13.2	+0.0	23.4	29.5	-6.1	Paral
16	10.151M	26.9	+0.1	+0.2	+9.1	-13.2	+0.0	23.1	29.5	-6.4	Paral
QP											
^	10.151M	30.2	+0.1	+0.2	+9.1	-13.2	+0.0	26.4	29.5	-3.1	Paral
18	12.665M	26.5	+0.2	+0.2	+8.8	-13.2	+0.0	22.5	29.5	-7.0	Paral
QP											
^	12.665M	30.1	+0.2	+0.2	+8.8	-13.2	+0.0	26.1	29.5	-3.4	Paral
20	23.200M	22.2	+0.2	+0.3	+7.3	-13.2	+0.0	16.8	29.5	-12.7	Paral
21	20.010M	19.6	+0.2	+0.3	+8.1	-13.2	+0.0	15.0	29.5	-14.5	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 14:39:39 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 285 Parallel
 Overhead Test Site 1 Position 9 Medium Lines only. Notches off. MODE 1/2. Formal Power

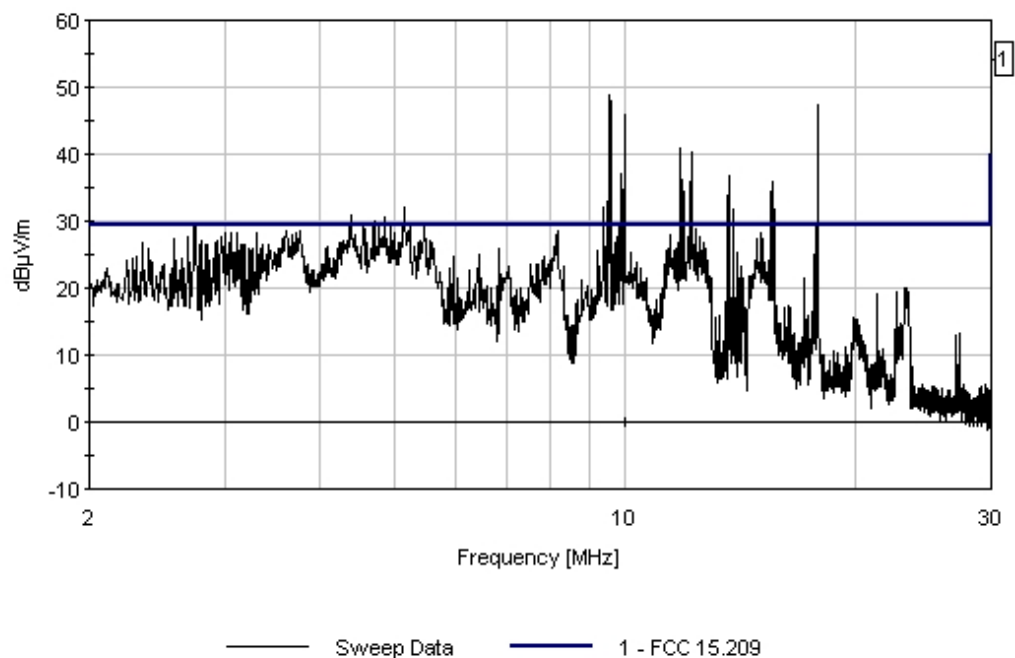

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 14:43:17
 Equipment: **BPL MV Gateway** Sequence#: 286
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 53.47 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.956M	29.0	+0.2	+0.3	+8.3	-13.2	+0.0	24.6	29.5	-4.9	Perpe
2	11.416M	27.5	+0.1	+0.2	+8.9	-13.2	+0.0	23.5	29.5	-6.0	Perpe
3	16.269M	27.1	+0.2	+0.2	+8.5	-13.2	+0.0	22.8	29.5	-6.7	Perpe
4	17.188M	25.9	+0.2	+0.2	+8.4	-13.2	+0.0	21.5	29.5	-8.0	Perpe
5	18.590M	24.5	+0.2	+0.3	+8.2	-13.2	+0.0	20.0	29.5	-9.5	Perpe
6	23.158M	23.7	+0.2	+0.3	+7.3	-13.2	+0.0	18.3	29.5	-11.2	Perpe

7	22.659M	23.5	+0.2	+0.3	+7.4	-13.2	+0.0	18.2	29.5	-11.3	Perpe
8	19.996M	22.6	+0.2	+0.3	+8.1	-13.2	+0.0	18.0	29.5	-11.5	Perpe
9	10.314M	21.7	+0.1	+0.2	+9.1	-13.2	+0.0	17.8	29.5	-11.7	Perpe
10	14.848M	20.6	+0.2	+0.2	+8.6	-13.2	+0.0	16.4	29.5	-13.1	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 14:43:17 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 286 Perpendicular
Overhead Test Site 1 Position 9 Medium Lines only. Notches off. MODE 1/2. Formal Power

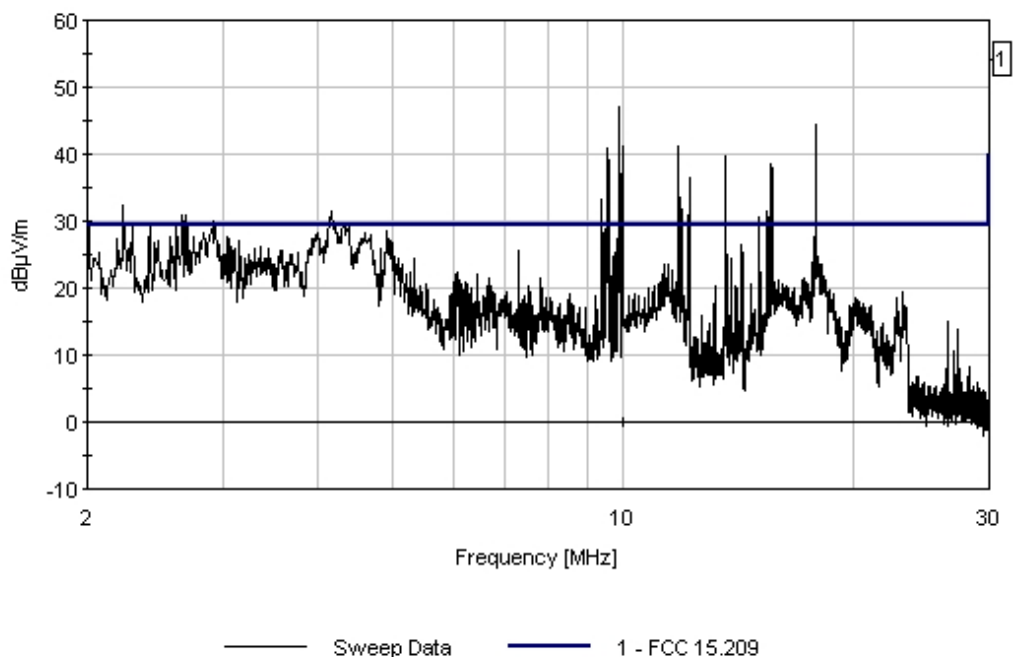

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 14:14:36
 Sequence#: 283
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.939M	29.8	+0.2	+0.2	+8.5	-13.2	+0.0	25.4	29.5	-4.1	Perpe
2	14.851M	28.7	+0.2	+0.2	+8.6	-13.2	+0.0	24.5	29.5	-5.0	Perpe
3	5.165M	27.8	+0.1	+0.1	+9.2	-13.2	+0.0	24.0	29.5	-5.5	Perpe
4	15.290M	27.9	+0.2	+0.2	+8.6	-13.2	+0.0	23.7	29.5	-5.8	Perpe
5	11.251M	27.6	+0.1	+0.2	+9.0	-13.2	+0.0	23.7	29.5	-5.8	Perpe
6	6.733M	25.5	+0.1	+0.2	+9.2	-13.2	+0.0	21.8	29.5	-7.7	Perpe

7	3.736M	23.3	+0.1	+0.2	+9.3	-13.2	+0.0	19.7	29.5	-9.8	Perpe
8	4.303M	20.6	+0.1	+0.2	+9.2	-13.2	+0.0	16.9	29.5	-12.6	Perpe
9	21.369M	21.8	+0.2	+0.3	+7.7	-13.2	+0.0	16.8	29.5	-12.7	Perpe
10	12.759M	18.5	+0.2	+0.2	+8.8	-13.2	+0.0	14.5	29.5	-15.0	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 14:14:36 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 283 Perpendicular
Overhead Test Site 1 Position 10 Medium Lines only. Notches off. MODE 1/2. Formal Power

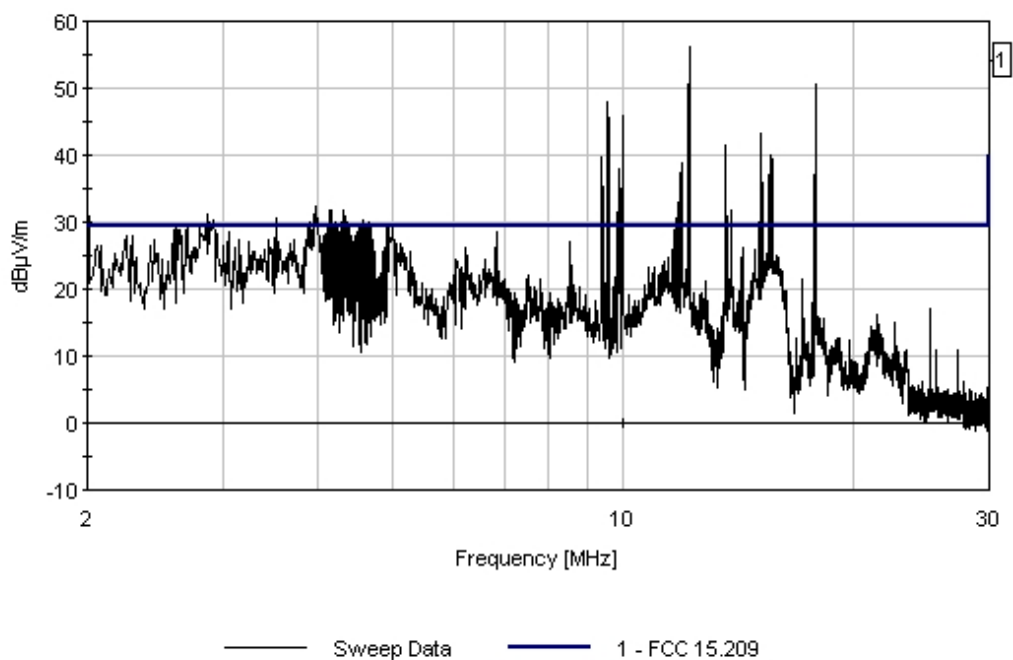

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: 6749420821

Date: 3/23/2006
Time: 14:30:26
Sequence#: 284
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1 QP	8.131M	32.5	+0.1	+0.2	+9.1	-13.2	+0.0	28.7	29.5	-0.8	Paral
^	8.131M	35.4	+0.1	+0.2	+9.1	-13.2	+0.0	31.6	29.5	+2.1	Paral
3 QP	5.163M	31.6	+0.1	+0.1	+9.2	-13.2	+0.0	27.8	29.5	-1.7	Paral
^	5.163M	34.4	+0.1	+0.1	+9.2	-13.2	+0.0	30.6	29.5	+1.1	Paral
5 QP	4.375M	29.2	+0.1	+0.2	+9.2	-13.2	+0.0	25.5	29.5	-4.0	Paral
^	4.375M	34.2	+0.1	+0.2	+9.2	-13.2	+0.0	30.5	29.5	+1.0	Paral

7	3.601M	28.7	+0.1	+0.2	+9.3	-13.2	+0.0	25.1	29.5	-4.4	Paral
QP											
^	3.601M	33.0	+0.1	+0.2	+9.3	-13.2	+0.0	29.4	29.5	-0.1	Paral
9	6.409M	27.9	+0.1	+0.1	+9.2	-13.2	+0.0	24.1	29.5	-5.4	Paral
QP											
^	6.409M	32.6	+0.1	+0.1	+9.2	-13.2	+0.0	28.8	29.5	-0.7	Paral
11	12.497M	27.2	+0.2	+0.2	+8.8	-13.2	+0.0	23.2	29.5	-6.3	Paral
QP											
^	12.497M	30.8	+0.2	+0.2	+8.8	-13.2	+0.0	26.8	29.5	-2.7	Paral
13	10.156M	26.2	+0.1	+0.2	+9.1	-13.2	+0.0	22.4	29.5	-7.1	Paral
QP											
^	10.156M	29.8	+0.1	+0.2	+9.1	-13.2	+0.0	26.0	29.5	-3.5	Paral
15	16.090M	26.3	+0.2	+0.2	+8.5	-13.2	+0.0	22.0	29.5	-7.5	Paral
16	23.089M	23.9	+0.2	+0.3	+7.3	-13.2	+0.0	18.5	29.5	-11.0	Paral
17	21.728M	23.4	+0.2	+0.3	+7.7	-13.2	+0.0	18.4	29.5	-11.1	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 14:30:26 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 284 Parallel
Overhead Test Site 1 Position 10 Medium Lines only. Notches off. MODE 1/2. Formal Power

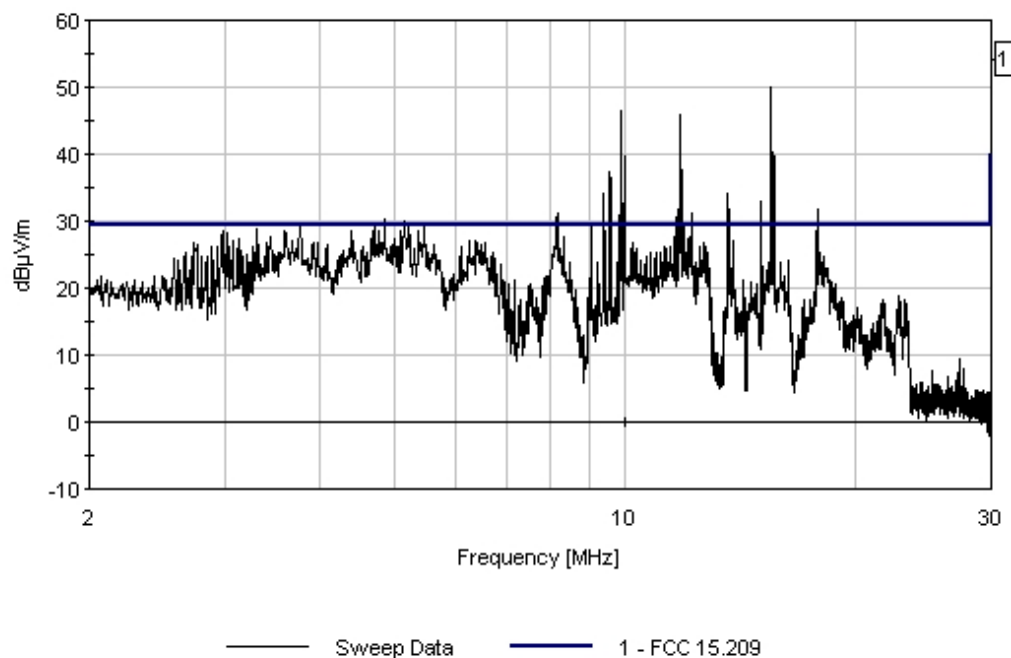

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 13:18:51
 Equipment: **BPL MV Gateway** Sequence#: 280
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5.215M	28.4	+0.1	+0.1	+9.2	-13.2	+0.0	24.6	29.5	-4.9	Perpe
2	6.948M	25.7	+0.1	+0.2	+9.2	-13.2	+0.0	22.0	29.5	-7.5	Perpe
3	5.663M	24.5	+0.1	+0.1	+9.2	-13.2	+0.0	20.7	29.5	-8.8	Perpe
4	17.195M	24.8	+0.2	+0.2	+8.4	-13.2	+0.0	20.4	29.5	-9.1	Perpe
5	11.250M	23.4	+0.1	+0.2	+9.0	-13.2	+0.0	19.5	29.5	-10.0	Perpe
6	16.590M	22.2	+0.2	+0.2	+8.4	-13.2	+0.0	17.8	29.5	-11.7	Perpe
7	7.765M	21.6	+0.1	+0.2	+9.1	-13.2	+0.0	17.8	29.5	-11.7	Perpe

8	12.423M	19.3	+0.2	+0.2	+8.8	-13.2	+0.0	15.3	29.5	-14.2	Perpe
9	18.680M	18.9	+0.2	+0.3	+8.2	-13.2	+0.0	14.4	29.5	-15.1	Perpe
10	21.403M	16.1	+0.2	+0.3	+7.7	-13.2	+0.0	11.1	29.5	-18.4	Perpe
11	23.118M	16.0	+0.2	+0.3	+7.3	-13.2	+0.0	10.6	29.5	-18.9	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 13:18:51 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 280 Perpendicular
Overhead Test Site 1 Position 11 Medium Lines only. Notches off. MODE 1/2. Formal Power

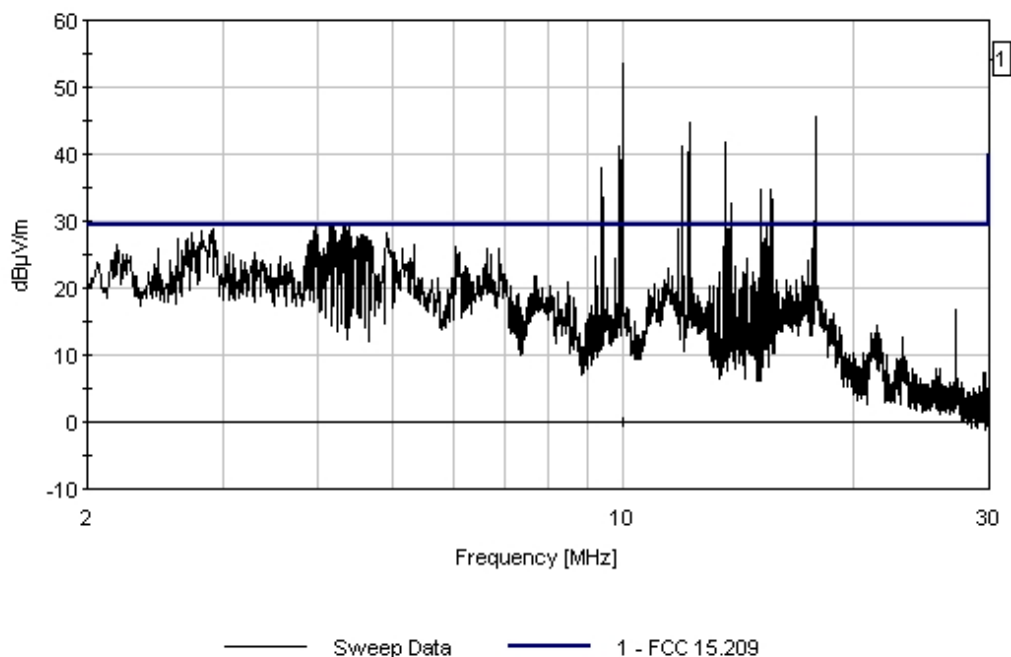

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 13:30:13
 Equipment: **BPL MV Gateway** Sequence#: 281
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	6.907M	31.9	+0.1	+0.2	+9.2	-13.2	+0.0	28.2	29.5	-1.3	Paral
QP											
^	6.907M	35.4	+0.1	+0.2	+9.2	-13.2	+0.0	31.7	29.5	+2.2	Paral
3	4.062M	29.7	+0.1	+0.2	+9.2	-13.2	+0.0	26.0	29.5	-3.5	Paral
QP											
^	4.062M	33.2	+0.1	+0.2	+9.2	-13.2	+0.0	29.5	29.5	+0.0	Paral
5	15.938M	30.2	+0.2	+0.2	+8.5	-13.2	+0.0	25.9	29.5	-3.6	Paral
QP											
^	15.938M	33.0	+0.2	+0.2	+8.5	-13.2	+0.0	28.7	29.5	-0.8	Paral

7	8.596M	29.3	+0.1	+0.2	+9.1	-13.2	+0.0	25.5	29.5	-4.0	Paral
8	11.412M	29.3	+0.1	+0.2	+8.9	-13.2	+0.0	25.3	29.5	-4.2	Paral
QP											
^	11.412M	33.7	+0.1	+0.2	+8.9	-13.2	+0.0	29.7	29.5	+0.2	Paral
10	7.732M	28.8	+0.1	+0.2	+9.1	-13.2	+0.0	25.0	29.5	-4.5	Paral
11	18.123M	28.2	+0.2	+0.3	+8.3	-13.2	+0.0	23.8	29.5	-5.7	Paral
12	12.622M	27.2	+0.2	+0.2	+8.8	-13.2	+0.0	23.2	29.5	-6.3	Paral
13	5.002M	26.9	+0.1	+0.1	+9.2	-13.2	+0.0	23.1	29.5	-6.4	Paral
QP											
^	5.002M	33.4	+0.1	+0.1	+9.2	-13.2	+0.0	29.6	29.5	+0.1	Paral
15	3.403M	26.7	+0.1	+0.1	+9.3	-13.2	+0.0	23.0	29.5	-6.5	Paral
16	15.052M	23.9	+0.2	+0.2	+8.6	-13.2	+0.0	19.7	29.5	-9.8	Paral
17	22.663M	22.6	+0.2	+0.3	+7.4	-13.2	+0.0	17.3	29.5	-12.2	Paral
18	21.733M	18.2	+0.2	+0.3	+7.7	-13.2	+0.0	13.2	29.5	-16.3	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 13:30:13 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 281 Parallel
 Overhead Test Site 1 Position 11 Medium Lines only, Notches off, MODE 1/2, Formal Power

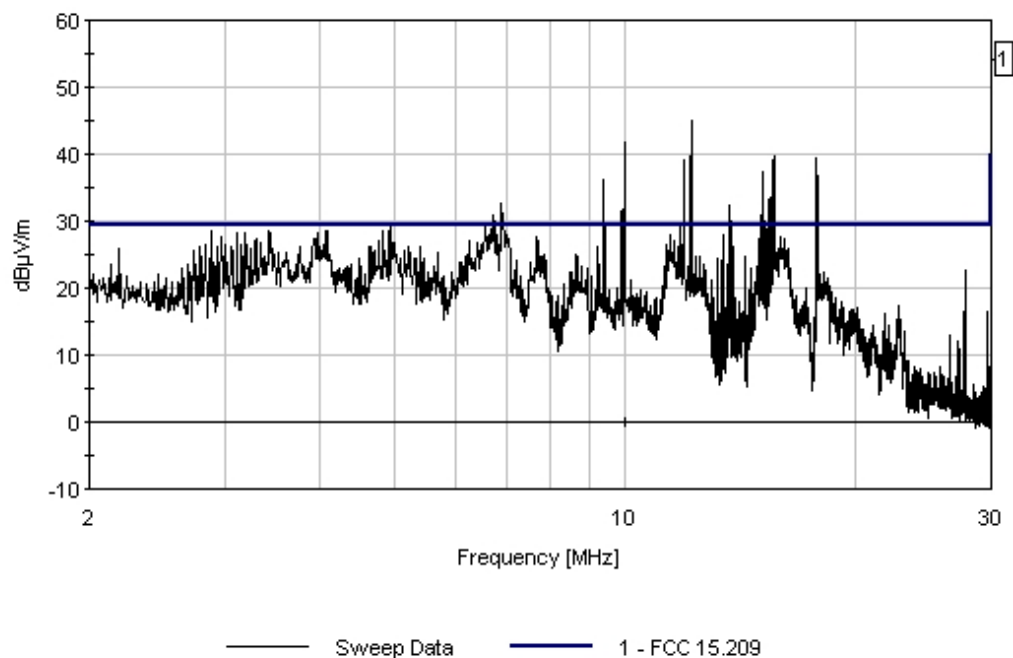

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 12:42:34
 Equipment: **BPL MV Gateway** Sequence#: 278
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5.155M	32.0	+0.1	+0.1	+9.2	-13.2	+0.0	28.2	29.5	-1.3	Paral
QP											
^	5.155M	39.1	+0.1	+0.1	+9.2	-13.2	+0.0	35.3	29.5	+5.8	Paral
3	8.128M	31.6	+0.1	+0.2	+9.1	-13.2	+0.0	27.8	29.5	-1.7	Paral
QP											
^	8.128M	34.7	+0.1	+0.2	+9.1	-13.2	+0.0	30.9	29.5	+1.4	Paral
5	11.296M	31.1	+0.1	+0.2	+8.9	-13.2	+0.0	27.1	29.5	-2.4	Paral
QP											
^	11.296M	35.3	+0.1	+0.2	+8.9	-13.2	+0.0	31.3	29.5	+1.8	Paral

7	6.907M	30.1	+0.1	+0.2	+9.2	-13.2	+0.0	26.4	29.5	-3.1	Paral
QP											
^	6.907M	35.5	+0.1	+0.2	+9.2	-13.2	+0.0	31.8	29.5	+2.3	Paral
9	4.062M	28.9	+0.1	+0.2	+9.2	-13.2	+0.0	25.2	29.5	-4.3	Paral
QP											
^	4.062M	33.7	+0.1	+0.2	+9.2	-13.2	+0.0	30.0	29.5	+0.5	Paral
11	14.847M	29.2	+0.2	+0.2	+8.6	-13.2	+0.0	25.0	29.5	-4.5	Paral
QP											
^	14.847M	32.3	+0.2	+0.2	+8.6	-13.2	+0.0	28.1	29.5	-1.4	Paral
13	15.779M	27.9	+0.2	+0.2	+8.5	-13.2	+0.0	23.6	29.5	-5.9	Paral
14	4.437M	24.8	+0.1	+0.2	+9.2	-13.2	+0.0	21.1	29.5	-8.4	Paral
QP											
^	4.437M	32.1	+0.1	+0.2	+9.2	-13.2	+0.0	28.4	29.5	-1.1	Paral
16	21.475M	26.2	+0.2	+0.3	+7.7	-13.2	+0.0	21.1	29.5	-8.4	Paral
17	3.530M	23.6	+0.1	+0.2	+9.3	-13.2	+0.0	20.0	29.5	-9.5	Paral
QP											
^	3.530M	31.6	+0.1	+0.2	+9.3	-13.2	+0.0	28.0	29.5	-1.5	Paral
19	18.360M	23.5	+0.2	+0.3	+8.2	-13.2	+0.0	19.0	29.5	-10.5	Paral
20	19.744M	22.6	+0.2	+0.3	+8.1	-13.2	+0.0	18.0	29.5	-11.5	Paral
21	23.100M	21.5	+0.2	+0.3	+7.3	-13.2	+0.0	16.1	29.5	-13.4	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 12:42:34 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 278 Parallel
Overhead Test Site 1 Position 12 Medium Lines only, Notches off, MODE 1/2, Formal Power

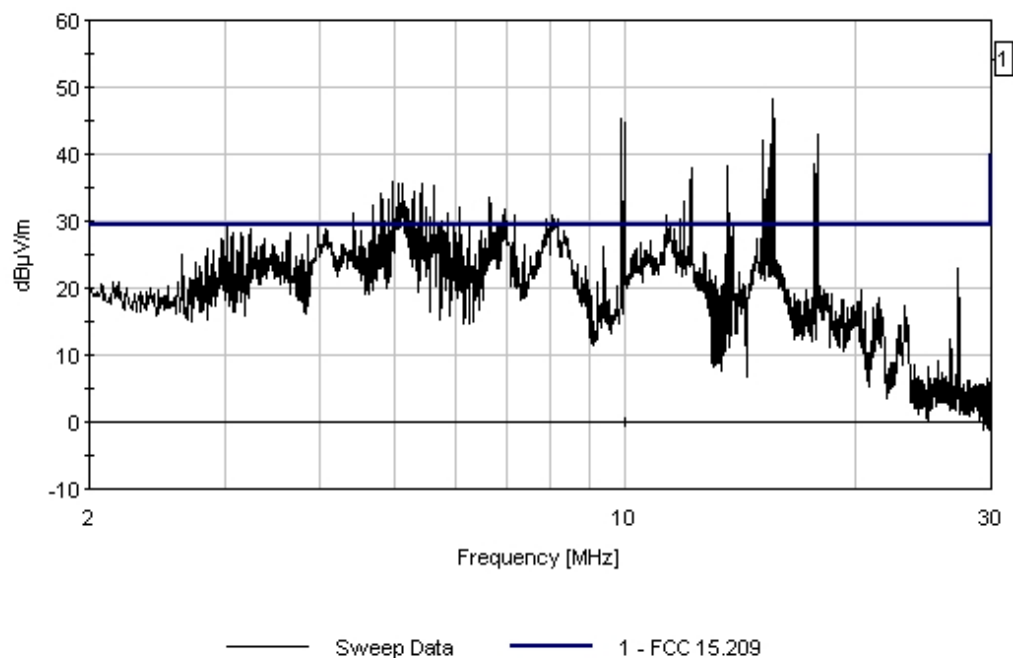

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 13:13:02
 Equipment: **BPL MV Gateway** Sequence#: 279
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE1/MODE2 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	15.938M	32.7	+0.2	+0.2	+8.5	-13.2	+0.0	28.4	29.5	-1.1	Perpe
QP											
^	15.938M	35.2	+0.2	+0.2	+8.5	-13.2	+0.0	30.9	29.5	+1.4	Perpe
3	6.724M	31.3	+0.1	+0.2	+9.2	-13.2	+0.0	27.6	29.5	-1.9	Perpe
QP											
^	6.724M	35.6	+0.1	+0.2	+9.2	-13.2	+0.0	31.8	29.5	+2.3	Perpe
5	5.108M	30.6	+0.1	+0.1	+9.2	-13.2	+0.0	26.8	29.5	-2.7	Perpe
QP											
^	5.108M	39.2	+0.1	+0.1	+9.2	-13.2	+0.0	35.4	29.5	+5.9	Perpe

7	8.439M	30.5	+0.1	+0.2	+9.1	-13.2	+0.0	26.7	29.5	-2.8	Perpe
QP											
^	8.439M	34.8	+0.1	+0.2	+9.1	-13.2	+0.0	31.0	29.5	+1.5	Perpe
9	18.751M	30.1	+0.2	+0.3	+8.2	-13.2	+0.0	25.6	29.5	-3.9	Perpe
10	17.454M	29.8	+0.2	+0.3	+8.3	-13.2	+0.0	25.4	29.5	-4.1	Perpe
11	10.629M	29.0	+0.1	+0.2	+9.0	-13.2	+0.0	25.1	29.5	-4.4	Perpe
QP											
^	10.629M	32.1	+0.1	+0.2	+9.0	-13.2	+0.0	28.2	29.5	-1.3	Perpe
13	5.633M	27.7	+0.1	+0.1	+9.2	-13.2	+0.0	23.9	29.5	-5.6	Perpe
QP											
^	5.633M	35.9	+0.1	+0.1	+9.2	-13.2	+0.0	32.1	29.5	+2.6	Perpe
15	14.860M	27.8	+0.2	+0.2	+8.6	-13.2	+0.0	23.6	29.5	-5.9	Perpe
16	11.415M	25.9	+0.1	+0.2	+8.9	-13.2	+0.0	21.9	29.5	-7.6	Perpe
17	21.729M	26.4	+0.2	+0.3	+7.7	-13.2	+0.0	21.4	29.5	-8.1	Perpe
18	3.649M	23.1	+0.1	+0.2	+9.3	-13.2	+0.0	19.5	29.5	-10.0	Perpe
19	23.303M	24.0	+0.2	+0.3	+7.3	-13.2	+0.0	18.6	29.5	-10.9	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 13:13:02 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 279 Perpendicular
Overhead Test Site 1 Position 12 Medium Lines only, Notches off, MODE 1/2, Formal Power

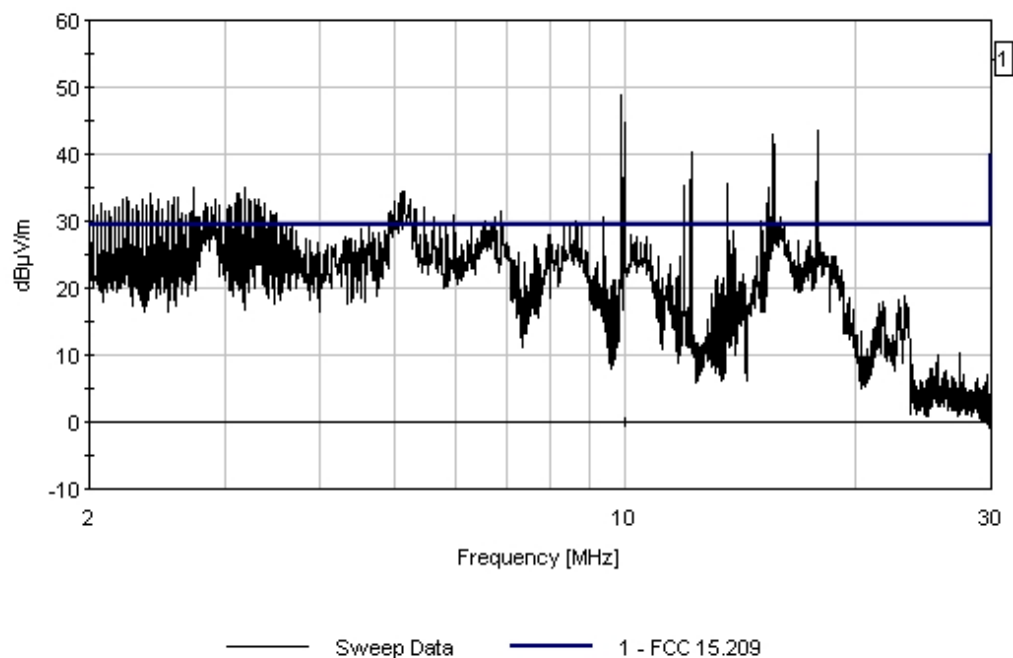

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/22/2006
 Test Type: **Radiated Scan** Time: 11:19:04
 Equipment: **BPL MV Gateway** Sequence#: 245
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly across from the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	26.877M	33.7	+0.2	+0.3	+6.1	-13.2	+0.0	27.1	29.5	-2.4	Perpe
QP											
^	26.877M	36.0	+0.2	+0.3	+6.1	-13.2	+0.0	29.4	29.5	-0.1	Perpe
3	19.523M	30.0	+0.2	+0.3	+8.1	-13.2	+0.0	25.4	29.5	-4.1	Perpe
4	25.469M	31.3	+0.2	+0.3	+6.7	-13.2	+0.0	25.3	29.5	-4.2	Perpe
QP											
^	25.469M	34.0	+0.2	+0.3	+6.7	-13.2	+0.0	28.0	29.5	-1.5	Perpe
6	17.217M	29.6	+0.2	+0.2	+8.4	-13.2	+0.0	25.2	29.5	-4.3	Perpe
QP											
^	17.217M	31.8	+0.2	+0.2	+8.4	-13.2	+0.0	27.4	29.5	-2.1	Perpe

8	14.697M	29.3	+0.2	+0.2	+8.6	-13.2	+0.0	25.1	29.5	-4.4	Perpe
QP											
^	14.697M	31.8	+0.2	+0.2	+8.6	-13.2	+0.0	27.6	29.5	-1.9	Perpe
^	14.697M	31.2	+0.2	+0.2	+8.6	-13.2	+0.0	27.0	29.5	-2.5	Perpe
11	29.844M	31.8	+0.3	+0.3	+5.1	-13.2	+0.0	24.3	29.5	-5.2	Perpe
QP											
^	29.844M	34.6	+0.3	+0.3	+5.1	-13.2	+0.0	27.1	29.5	-2.4	Perpe
13	23.158M	29.3	+0.2	+0.3	+7.3	-13.2	+0.0	23.9	29.5	-5.6	Perpe
QP											
^	23.158M	32.6	+0.2	+0.3	+7.3	-13.2	+0.0	27.2	29.5	-2.3	Perpe
15	21.098M	28.8	+0.2	+0.3	+7.8	-13.2	+0.0	23.9	29.5	-5.6	Perpe
QP											
^	21.098M	31.6	+0.2	+0.3	+7.8	-13.2	+0.0	26.7	29.5	-2.8	Perpe
17	19.840M	28.1	+0.2	+0.3	+8.1	-13.2	+0.0	23.5	29.5	-6.0	Perpe
QP											
^	19.840M	30.9	+0.2	+0.3	+8.1	-13.2	+0.0	26.3	29.5	-3.2	Perpe

Overhead Test Site #1 Date: 3/22/2006 Time: 11:19:04 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 245 Perpendicular
Overhead Test Site 1 Position 1 Medium Lines only. Notches off. MODE 2/3. Formal Power

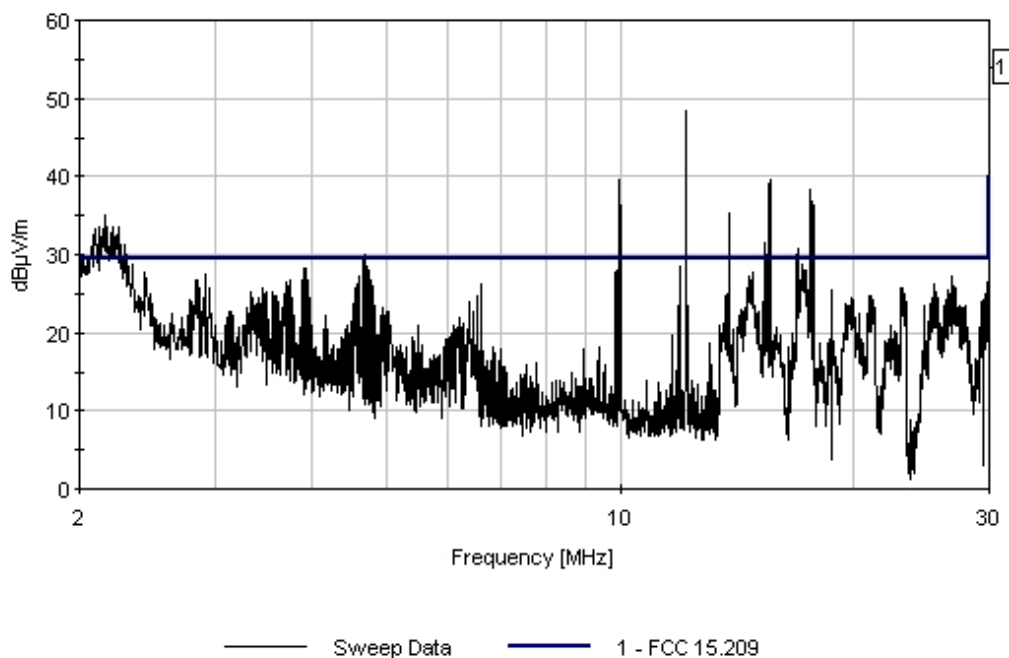

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: Corinex
 Model: MV Gateway
 S/N: 6749420821

Date: 3/22/2006
 Time: 11:40:55
 Sequence#: 246
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly across from the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	26.876M	35.7	+0.2	+0.3	+6.1	-13.2	+0.0	29.1	29.5	-0.4	Paral
QP											
^	26.876M	38.3	+0.2	+0.3	+6.1	-13.2	+0.0	31.7	29.5	+2.2	Paral
3	28.749M	35.5	+0.3	+0.3	+5.4	-13.2	+0.0	28.3	29.5	-1.2	Paral
QP											
^	28.749M	37.4	+0.3	+0.3	+5.4	-13.2	+0.0	30.2	29.5	+0.7	Paral
5	24.686M	33.2	+0.2	+0.3	+7.0	-13.2	+0.0	27.5	29.5	-2.0	Paral
QP											
^	24.686M	36.1	+0.2	+0.3	+7.0	-13.2	+0.0	30.4	29.5	+0.9	Paral

7	19.102M	30.9	+0.2	+0.3	+8.2	-13.2	+0.0	26.4	29.5	-3.1	Paral
QP											
^	19.102M	34.5	+0.2	+0.3	+8.2	-13.2	+0.0	30.0	29.5	+0.5	Paral
9	19.998M	30.8	+0.2	+0.3	+8.1	-13.2	+0.0	26.2	29.5	-3.3	Paral
QP											
^	19.998M	33.5	+0.2	+0.3	+8.1	-13.2	+0.0	28.9	29.5	-0.6	Paral
11	29.378M	33.2	+0.3	+0.3	+5.2	-13.2	+0.0	25.8	29.5	-3.7	Paral
QP											
^	29.378M	35.7	+0.3	+0.3	+5.2	-13.2	+0.0	28.3	29.5	-1.2	Paral
13	21.100M	29.8	+0.2	+0.3	+7.8	-13.2	+0.0	24.8	29.5	-4.7	Paral
QP											
^	21.100M	31.9	+0.2	+0.3	+7.8	-13.2	+0.0	27.0	29.5	-2.5	Paral
15	18.296M	28.9	+0.2	+0.3	+8.3	-13.2	+0.0	24.5	29.5	-5.0	Paral
QP											
^	18.296M	32.2	+0.2	+0.3	+8.3	-13.2	+0.0	27.8	29.5	-1.7	Paral
17	15.705M	27.4	+0.2	+0.2	+8.5	-13.2	+0.0	23.1	29.5	-6.4	Paral
QP											
^	15.705M	30.2	+0.2	+0.2	+8.5	-13.2	+0.0	25.9	29.5	-3.6	Paral

Overhead Test Site #1 Date: 3/22/2006 Time: 11:40:55 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 246 Parallel
Overhead Test Site 1 Position 1 Medium Lines only. Notches off. MODE 2/3. Formal Power

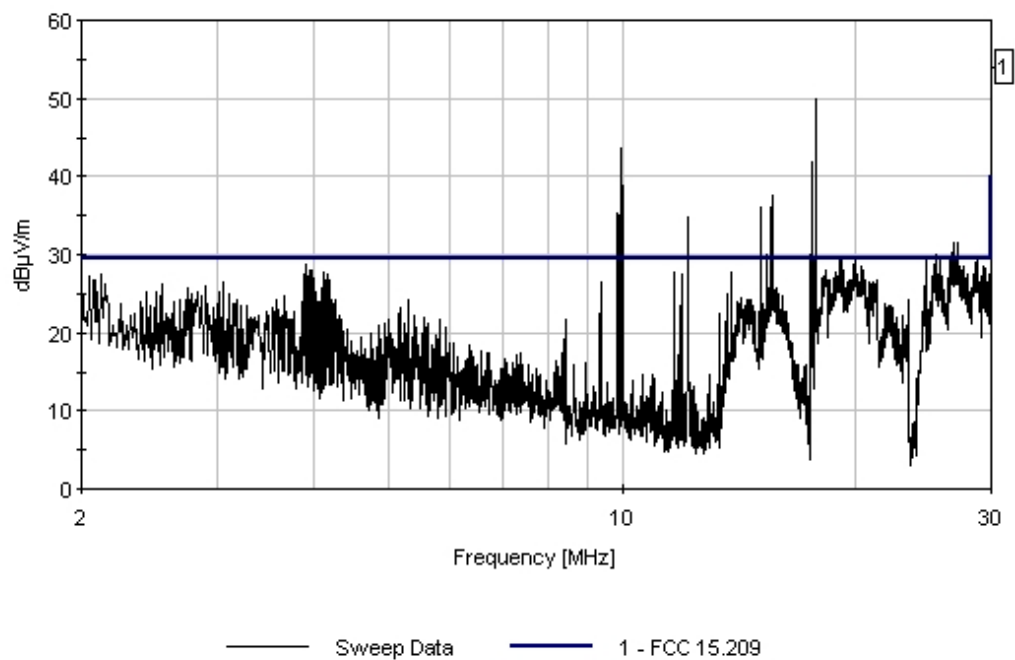

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/22/2006
 Test Type: **Radiated Scan** Time: 10:49:07
 Equipment: **BPL MV Gateway** Sequence#: 243
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	26.875M	35.9	+0.2	+0.3	+6.1	-13.2	+0.0	29.3	29.5	-0.2	Paral
QP											
^	26.875M	38.6	+0.2	+0.3	+6.1	-13.2	+0.0	32.0	29.5	+2.5	Paral
3	27.186M	34.8	+0.2	+0.3	+6.0	-13.2	+0.0	28.1	29.5	-1.4	Paral
QP											
^	27.186M	41.5	+0.2	+0.3	+6.0	-13.2	+0.0	34.8	29.5	+5.3	Paral
5	25.317M	33.9	+0.2	+0.3	+6.8	-13.2	+0.0	28.0	29.5	-1.5	Paral
QP											
^	25.317M	35.9	+0.2	+0.3	+6.8	-13.2	+0.0	30.0	29.5	+0.5	Paral

7	23.087M	31.5	+0.2	+0.3	+7.3	-13.2	+0.0	26.1	29.5	-3.4	Paral
QP											
^	23.087M	34.8	+0.2	+0.3	+7.3	-13.2	+0.0	29.4	29.5	-0.1	Paral
9	27.967M	31.9	+0.3	+0.3	+5.7	-13.2	+0.0	25.0	29.5	-4.5	Paral
QP											
^	27.967M	34.4	+0.3	+0.3	+5.7	-13.2	+0.0	27.5	29.5	-2.0	Paral
11	21.328M	29.7	+0.2	+0.3	+7.8	-13.2	+0.0	24.8	29.5	-4.7	Paral
QP											
^	21.328M	32.8	+0.2	+0.3	+7.8	-13.2	+0.0	27.9	29.5	-1.6	Paral
13	29.844M	31.9	+0.3	+0.3	+5.1	-13.2	+0.0	24.4	29.5	-5.1	Paral
14	19.329M	28.9	+0.2	+0.3	+8.2	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	19.329M	32.5	+0.2	+0.3	+8.2	-13.2	+0.0	28.0	29.5	-1.5	Paral
16	18.312M	28.3	+0.2	+0.3	+8.3	-13.2	+0.0	23.9	29.5	-5.6	Paral
QP											
^	18.312M	31.6	+0.2	+0.3	+8.3	-13.2	+0.0	27.2	29.5	-2.3	Paral
18	28.545M	29.9	+0.3	+0.3	+5.5	-13.2	+0.0	22.8	29.5	-6.7	Paral
QP											
^	28.545M	33.2	+0.3	+0.3	+5.5	-13.2	+0.0	26.1	29.5	-3.4	Paral
20	17.186M	26.8	+0.2	+0.2	+8.4	-13.2	+0.0	22.4	29.5	-7.1	Paral

Overhead Test Site #1 Date: 3/22/2006 Time: 10:49:07 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 243 Parallel
 Overhead Test Site 1 Position 2 Medium Lines only. Notches off. MODE 2/3. Formal Power

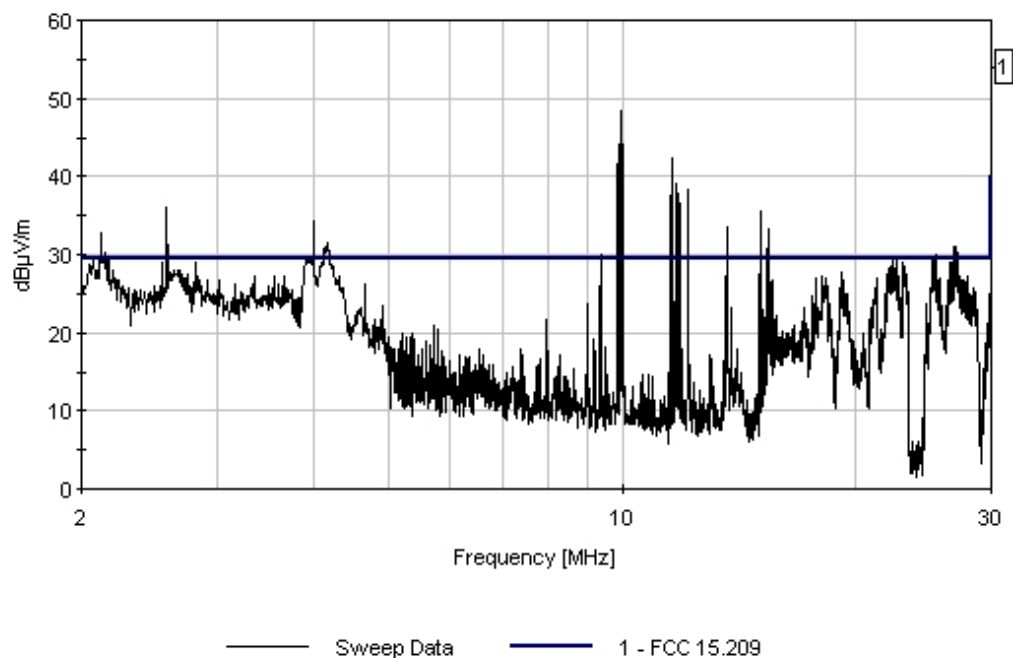

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/22/2006
 Time: 11:03:55
 Sequence#: 244
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	26.875M	33.1	+0.2	+0.3	+6.1	-13.2	+0.0	26.5	29.5	-3.0	Perpe
QP											
^	26.875M	34.6	+0.2	+0.3	+6.1	-13.2	+0.0	27.9	29.5	-1.6	Perpe
3	17.338M	30.9	+0.2	+0.3	+8.3	-13.2	+0.0	26.5	29.5	-3.0	Perpe
QP											
^	17.338M	33.8	+0.2	+0.3	+8.3	-13.2	+0.0	29.4	29.5	-0.1	Perpe
5	19.841M	31.0	+0.2	+0.3	+8.1	-13.2	+0.0	26.4	29.5	-3.1	Perpe
QP											
^	19.841M	33.6	+0.2	+0.3	+8.1	-13.2	+0.0	29.0	29.5	-0.5	Perpe

7	18.751M	29.8	+0.2	+0.3	+8.2	-13.2	+0.0	25.3	29.5	-4.2	Perpe
	QP										
^	18.751M	31.5	+0.2	+0.3	+8.2	-13.2	+0.0	27.0	29.5	-2.5	Perpe
9	27.961M	32.1	+0.3	+0.3	+5.7	-13.2	+0.0	25.2	29.5	-4.3	Perpe
10	29.843M	31.1	+0.3	+0.3	+5.1	-13.2	+0.0	23.6	29.5	-5.9	Perpe
11	25.467M	29.3	+0.2	+0.3	+6.7	-13.2	+0.0	23.3	29.5	-6.2	Perpe
	QP										
^	25.467M	31.7	+0.2	+0.3	+6.7	-13.2	+0.0	25.7	29.5	-3.8	Perpe
13	23.155M	28.3	+0.2	+0.3	+7.3	-13.2	+0.0	22.9	29.5	-6.6	Perpe
	QP										
^	23.155M	31.9	+0.2	+0.3	+7.3	-13.2	+0.0	26.5	29.5	-3.0	Perpe

Overhead Test Site #1 Date: 3/22/2006 Time: 11:03:55 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 244 Perpendicular
Overhead Test Site 1 Position 2 Medium Lines only, Notches off, MODE 2/3, Formal Power

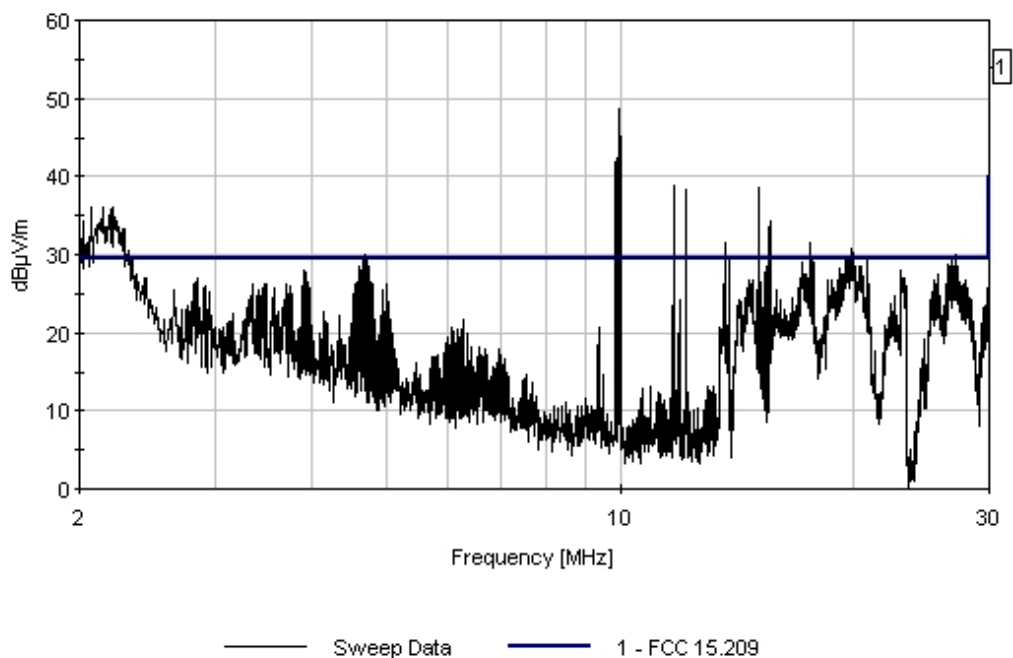

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/22/2006
 Test Type: **Radiated Scan** Time: 12:07:45
 Equipment: **BPL MV Gateway** Sequence#: 248
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	21.326M	34.3	+0.2	+0.3	+7.8	-13.2	+0.0	29.4	29.5	-0.1	Perpe
QP											
^	21.326M	36.9	+0.2	+0.3	+7.8	-13.2	+0.0	32.0	29.5	+2.5	Perpe
3	26.874M	34.0	+0.2	+0.3	+6.1	-13.2	+0.0	27.4	29.5	-2.1	Perpe
QP											
^	26.874M	36.3	+0.2	+0.3	+6.1	-13.2	+0.0	29.7	29.5	+0.2	Perpe
5	29.845M	32.8	+0.3	+0.3	+5.1	-13.2	+0.0	25.3	29.5	-4.2	Perpe
6	18.379M	29.4	+0.2	+0.3	+8.2	-13.2	+0.0	24.9	29.5	-4.6	Perpe
QP											
^	18.379M	32.7	+0.2	+0.3	+8.2	-13.2	+0.0	28.2	29.5	-1.3	Perpe

8	14.238M	28.9	+0.2	+0.2	+8.7	-13.2	+0.0	24.8	29.5	-4.7	Perpe
QP											
^	14.238M	31.8	+0.2	+0.2	+8.7	-13.2	+0.0	27.7	29.5	-1.8	Perpe
10	14.691M	28.7	+0.2	+0.2	+8.6	-13.2	+0.0	24.5	29.5	-5.0	Perpe
QP											
^	14.691M	31.6	+0.2	+0.2	+8.6	-13.2	+0.0	27.4	29.5	-2.1	Perpe
12	17.256M	28.6	+0.2	+0.2	+8.4	-13.2	+0.0	24.2	29.5	-5.3	Perpe
QP											
^	17.256M	32.4	+0.2	+0.2	+8.4	-13.2	+0.0	28.0	29.5	-1.5	Perpe
14	19.227M	28.3	+0.2	+0.3	+8.2	-13.2	+0.0	23.8	29.5	-5.7	Perpe
QP											
^	19.227M	32.2	+0.2	+0.3	+8.2	-13.2	+0.0	27.7	29.5	-1.8	Perpe
16	22.031M	28.6	+0.2	+0.3	+7.6	-13.2	+0.0	23.5	29.5	-6.0	Perpe
QP											
^	22.031M	31.3	+0.2	+0.3	+7.6	-13.2	+0.0	26.2	29.5	-3.3	Perpe

Overhead Test Site #1 Date: 3/22/2006 Time: 12:07:45 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 248 Perpendicular
 Overhead Test Site 1 Position 3 Medium Lines only. Notches off. MODE 2/3. Formal Power

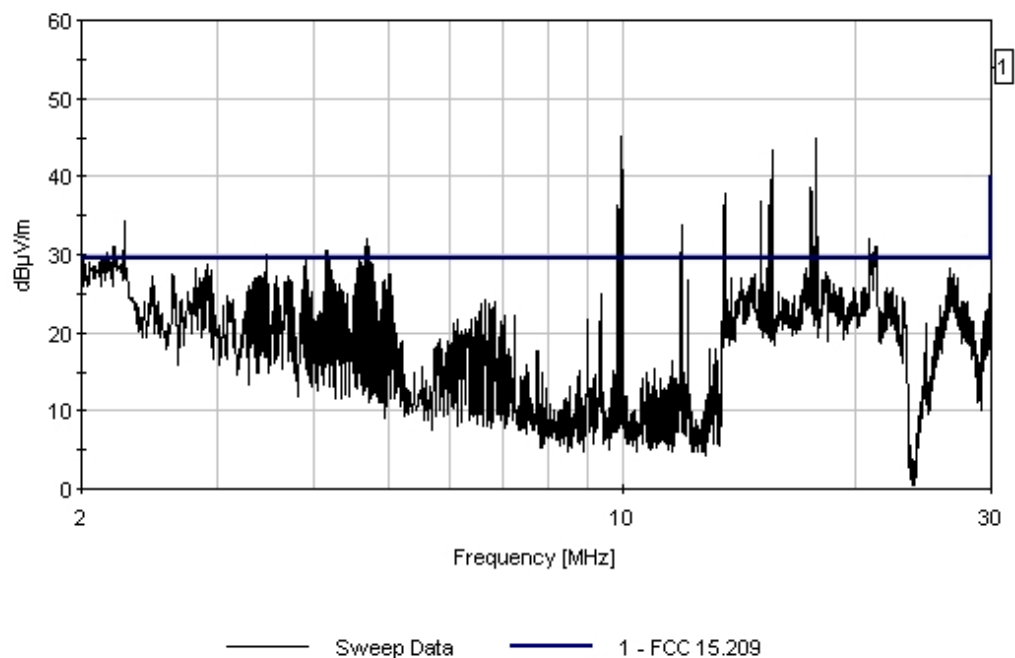

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: 6749420821

Date: 3/22/2006
Time: 11:57:34
Sequence#: 247
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	26.874M	36.0	+0.2	+0.3	+6.1	-13.2	+0.0	29.4	29.5	-0.1	Paral
QP											
^	26.874M	38.5	+0.2	+0.3	+6.1	-13.2	+0.0	31.9	29.5	+2.4	Paral
3	21.365M	34.0	+0.2	+0.3	+7.7	-13.2	+0.0	29.0	29.5	-0.5	Paral
QP											
^	21.365M	36.4	+0.2	+0.3	+7.7	-13.2	+0.0	31.3	29.5	+1.8	Paral
5	23.155M	34.2	+0.2	+0.3	+7.3	-13.2	+0.0	28.8	29.5	-0.7	Paral
6	25.312M	34.5	+0.2	+0.3	+6.8	-13.2	+0.0	28.6	29.5	-0.9	Paral
QP											
^	25.312M	37.3	+0.2	+0.3	+6.8	-13.2	+0.0	31.4	29.5	+1.9	Paral

8	15.785M	32.6	+0.2	+0.2	+8.5	-13.2	+0.0	28.3	29.5	-1.2	Paral
QP											
^	15.785M	35.0	+0.2	+0.2	+8.5	-13.2	+0.0	30.7	29.5	+1.2	Paral
10	29.844M	34.5	+0.3	+0.3	+5.1	-13.2	+0.0	27.0	29.5	-2.5	Paral
QP											
^	29.844M	37.4	+0.3	+0.3	+5.1	-13.2	+0.0	29.9	29.5	+0.4	Paral
12	14.581M	31.1	+0.2	+0.2	+8.6	-13.2	+0.0	26.9	29.5	-2.6	Paral
QP											
^	14.581M	34.2	+0.2	+0.2	+8.6	-13.2	+0.0	30.0	29.5	+0.5	Paral
14	19.842M	28.3	+0.2	+0.3	+8.1	-13.2	+0.0	23.7	29.5	-5.8	Paral
QP											
^	19.842M	31.6	+0.2	+0.3	+8.1	-13.2	+0.0	27.0	29.5	-2.5	Paral
16	17.189M	28.1	+0.2	+0.2	+8.4	-13.2	+0.0	23.7	29.5	-5.8	Paral
QP											
^	17.189M	31.2	+0.2	+0.2	+8.4	-13.2	+0.0	26.8	29.5	-2.7	Paral
18	18.931M	27.6	+0.2	+0.3	+8.2	-13.2	+0.0	23.1	29.5	-6.4	Paral
QP											
^	18.931M	30.8	+0.2	+0.3	+8.2	-13.2	+0.0	26.3	29.5	-3.2	Paral

Overhead Test Site #1 Date: 3/22/2006 Time: 11:57:34 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 247 Parallel
 Overhead Test Site 1 Position 3 Medium Lines only. Notches off. MODE 2/3. Formal Power

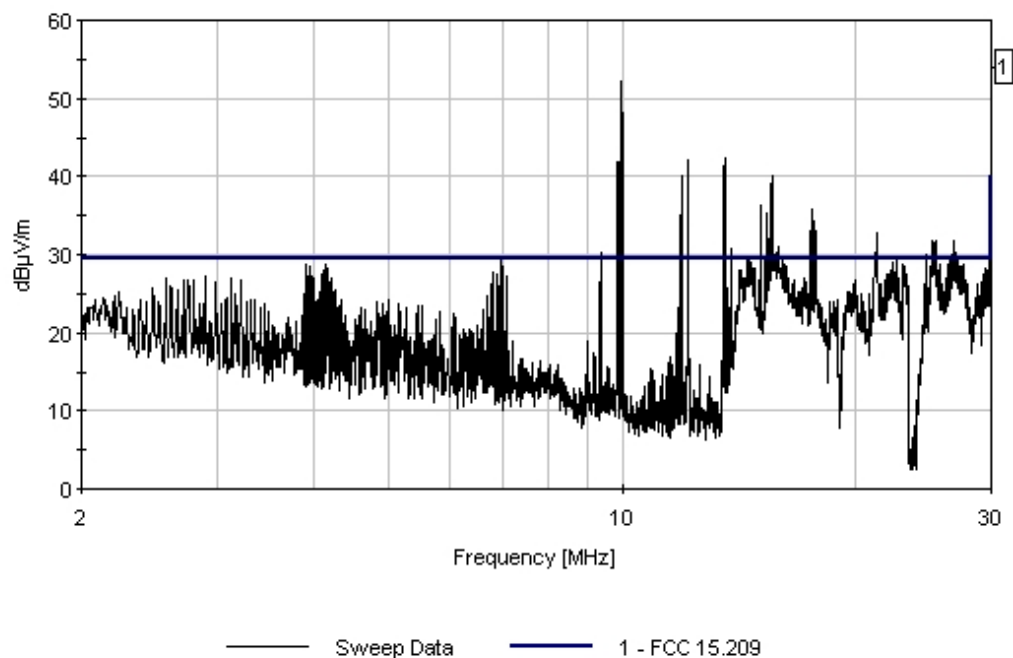

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/22/2006
 Time: 12:32:33
 Sequence#: 249
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	21.098M	32.9	+0.2	+0.3	+7.8	-13.2	+0.0	28.0	29.5	-1.5	Perpe
QP											
^	21.098M	35.4	+0.2	+0.3	+7.8	-13.2	+0.0	30.5	29.5	+1.0	Perpe
3	23.157M	33.2	+0.2	+0.3	+7.3	-13.2	+0.0	27.8	29.5	-1.7	Perpe
QP											
^	23.157M	36.4	+0.2	+0.3	+7.3	-13.2	+0.0	31.0	29.5	+1.5	Perpe
5	18.380M	32.4	+0.2	+0.3	+8.2	-13.2	+0.0	27.8	29.5	-1.7	Perpe
QP											
^	18.380M	35.4	+0.2	+0.3	+8.2	-13.2	+0.0	30.9	29.5	+1.4	Perpe

7	19.843M	32.2	+0.2	+0.3	+8.1	-13.2	+0.0	27.6	29.5	-1.9	Perpe
QP											
^	19.843M	35.0	+0.2	+0.3	+8.1	-13.2	+0.0	30.4	29.5	+0.9	Perpe
9	19.229M	32.1	+0.2	+0.3	+8.2	-13.2	+0.0	27.5	29.5	-2.0	Perpe
QP											
^	19.229M	35.8	+0.2	+0.3	+8.2	-13.2	+0.0	31.3	29.5	+1.8	Perpe
11	14.236M	30.8	+0.2	+0.2	+8.7	-13.2	+0.0	26.7	29.5	-2.8	Perpe
QP											
^	14.236M	33.7	+0.2	+0.2	+8.7	-13.2	+0.0	29.6	29.5	+0.1	Perpe
13	24.683M	30.3	+0.2	+0.3	+7.0	-13.2	+0.0	24.6	29.5	-4.9	Perpe
14	15.408M	27.3	+0.2	+0.2	+8.6	-13.2	+0.0	23.1	29.5	-6.4	Perpe
QP											
^	15.408M	30.8	+0.2	+0.2	+8.6	-13.2	+0.0	26.6	29.5	-2.9	Perpe
16	25.781M	25.7	+0.2	+0.3	+6.6	-13.2	+0.0	19.6	29.5	-9.9	Perpe

Overhead Test Site #1 Date: 3/22/2006 Time: 12:32:33 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 249 Perpendicular
 Overhead Test Site 1 Position 4 Medium Lines only. Notches off. MODE 2/3. Formal Power

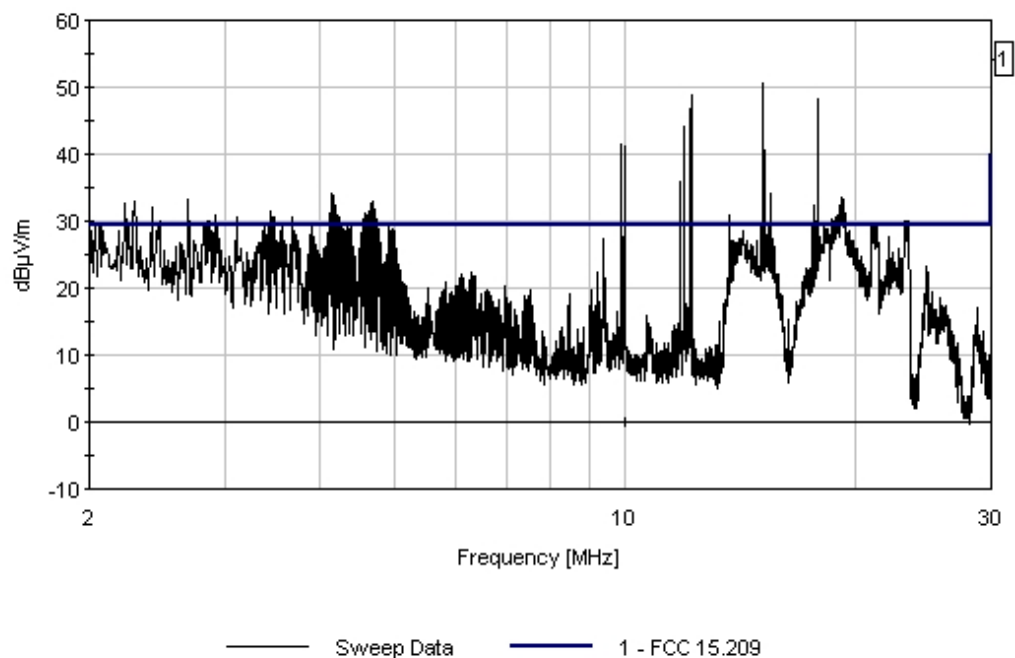

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/22/2006
 Time: 14:07:36
 Sequence#: 252
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.780M	33.5	+0.2	+0.2	+8.5	-13.2	+0.0	29.2	29.5	-0.3	Paral
QP											
^	15.780M	36.4	+0.2	+0.2	+8.5	-13.2	+0.0	32.1	29.5	+2.6	Paral
3	27.188M	35.8	+0.2	+0.3	+6.0	-13.2	+0.0	29.1	29.5	-0.4	Paral
QP											
^	27.188M	40.0	+0.2	+0.3	+6.0	-13.2	+0.0	33.3	29.5	+3.8	Paral
5	23.281M	33.5	+0.2	+0.3	+7.3	-13.2	+0.0	28.1	29.5	-1.4	Paral
QP											
^	23.281M	35.9	+0.2	+0.3	+7.3	-13.2	+0.0	30.5	29.5	+1.0	Paral

7	21.093M	33.1	+0.2	+0.3	+7.8	-13.2	+0.0	28.1	29.5	-1.4	Paral
QP											
^	21.093M	36.7	+0.2	+0.3	+7.8	-13.2	+0.0	31.8	29.5	+2.3	Paral
9	22.656M	33.3	+0.2	+0.3	+7.4	-13.2	+0.0	27.9	29.5	-1.6	Paral
QP											
^	22.656M	35.3	+0.2	+0.3	+7.4	-13.2	+0.0	30.0	29.5	+0.5	Paral
11	28.597M	34.9	+0.3	+0.3	+5.5	-13.2	+0.0	27.8	29.5	-1.7	Paral
QP											
^	28.597M	37.6	+0.3	+0.3	+5.5	-13.2	+0.0	30.5	29.5	+1.0	Paral
13	21.719M	32.6	+0.2	+0.3	+7.7	-13.2	+0.0	27.6	29.5	-1.9	Paral
QP											
^	21.719M	35.1	+0.2	+0.3	+7.7	-13.2	+0.0	30.1	29.5	+0.6	Paral
15	16.412M	31.8	+0.2	+0.2	+8.4	-13.2	+0.0	27.3	29.5	-2.2	Paral
QP											
^	16.412M	34.0	+0.2	+0.2	+8.4	-13.2	+0.0	29.6	29.5	+0.1	Paral
17	26.755M	33.4	+0.2	+0.3	+6.2	-13.2	+0.0	26.9	29.5	-2.6	Paral
QP											
^	26.755M	36.4	+0.2	+0.3	+6.2	-13.2	+0.0	29.9	29.5	+0.4	Paral
19	18.379M	30.4	+0.2	+0.3	+8.2	-13.2	+0.0	25.9	29.5	-3.6	Paral
QP											
^	18.379M	33.5	+0.2	+0.3	+8.2	-13.2	+0.0	29.0	29.5	-0.5	Paral
21	29.847M	33.3	+0.3	+0.3	+5.1	-13.2	+0.0	25.8	29.5	-3.7	Paral
QP											
^	29.847M	35.1	+0.3	+0.3	+5.1	-13.2	+0.0	27.6	29.5	-1.9	Paral
23	19.219M	30.1	+0.2	+0.3	+8.2	-13.2	+0.0	25.6	29.5	-3.9	Paral
QP											
^	19.219M	32.7	+0.2	+0.3	+8.2	-13.2	+0.0	28.2	29.5	-1.3	Paral
25	24.685M	31.2	+0.2	+0.3	+7.0	-13.2	+0.0	25.5	29.5	-4.0	Paral
QP											
^	24.685M	33.7	+0.2	+0.3	+7.0	-13.2	+0.0	28.0	29.5	-1.5	Paral
27	15.292M	29.5	+0.2	+0.2	+8.6	-13.2	+0.0	25.3	29.5	-4.2	Paral
QP											
^	15.292M	32.6	+0.2	+0.2	+8.6	-13.2	+0.0	28.4	29.5	-1.1	Paral

Overhead Test Site #1 Date: 3/22/2006 Time: 14:07:36 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 252 Parallel
 Overhead Test Site 1 Position 4 Medium Lines only. Notches off. MODE 2/3. Formal Power

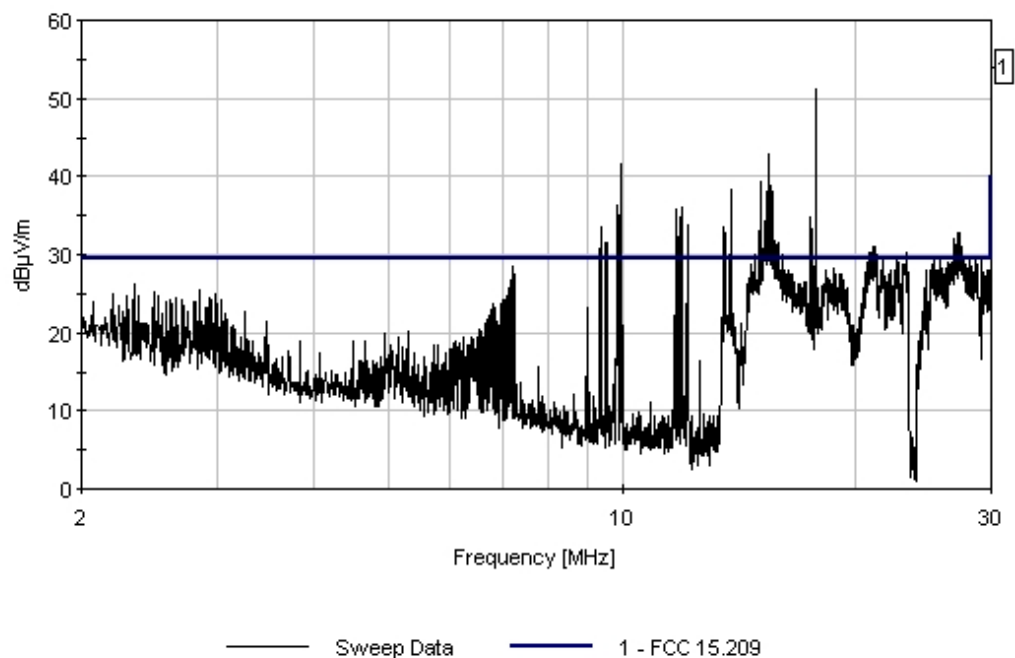

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/22/2006
 Test Type: **Radiated Scan** Time: 14:57:48
 Equipment: **BPL MV Gateway** Sequence#: 255
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	19.841M	33.1	+0.2	+0.3	+8.1	-13.2	+0.0	28.5	29.5	-1.0	Paral
QP											
^	19.841M	36.0	+0.2	+0.3	+8.1	-13.2	+0.0	31.4	29.5	+1.9	Paral
3	25.207M	34.2	+0.2	+0.3	+6.8	-13.2	+0.0	28.3	29.5	-1.2	Paral
QP											
^	25.207M	37.1	+0.2	+0.3	+6.8	-13.2	+0.0	31.1	29.5	+1.6	Paral
5	21.327M	32.9	+0.2	+0.3	+7.8	-13.2	+0.0	28.0	29.5	-1.5	Paral
QP											
^	21.327M	35.4	+0.2	+0.3	+7.8	-13.2	+0.0	30.5	29.5	+1.0	Paral

7	24.749M	33.5	+0.2	+0.3	+7.0	-13.2	+0.0	27.8	29.5	-1.7	Paral
QP											
^	24.749M	36.4	+0.2	+0.3	+7.0	-13.2	+0.0	30.7	29.5	+1.2	Paral
9	19.101M	32.0	+0.2	+0.3	+8.2	-13.2	+0.0	27.5	29.5	-2.0	Paral
QP											
^	19.101M	35.5	+0.2	+0.3	+8.2	-13.2	+0.0	31.0	29.5	+1.5	Paral
11	15.303M	31.6	+0.2	+0.2	+8.6	-13.2	+0.0	27.4	29.5	-2.1	Paral
QP											
^	15.303M	34.2	+0.2	+0.2	+8.6	-13.2	+0.0	30.0	29.5	+0.5	Paral
13	23.438M	32.7	+0.2	+0.3	+7.2	-13.2	+0.0	27.2	29.5	-2.3	Paral
QP											
^	23.438M	35.7	+0.2	+0.3	+7.2	-13.2	+0.0	30.2	29.5	+0.7	Paral
15	26.224M	32.5	+0.2	+0.3	+6.4	-13.2	+0.0	26.2	29.5	-3.3	Paral
QP											
^	26.224M	35.6	+0.2	+0.3	+6.4	-13.2	+0.0	29.3	29.5	-0.2	Paral
17	15.782M	30.6	+0.2	+0.2	+8.5	-13.2	+0.0	26.2	29.5	-3.3	Paral
QP											
^	15.782M	33.0	+0.2	+0.2	+8.5	-13.2	+0.0	28.7	29.5	-0.8	Paral
19	18.125M	30.1	+0.2	+0.3	+8.3	-13.2	+0.0	25.6	29.5	-3.9	Paral
QP											
^	18.125M	32.6	+0.2	+0.3	+8.3	-13.2	+0.0	28.2	29.5	-1.3	Paral
21	14.981M	29.3	+0.2	+0.2	+8.6	-13.2	+0.0	25.1	29.5	-4.4	Paral
QP											
^	14.981M	31.6	+0.2	+0.2	+8.6	-13.2	+0.0	27.4	29.5	-2.1	Paral
23	29.845M	31.8	+0.3	+0.3	+5.1	-13.2	+0.0	24.3	29.5	-5.2	Paral
QP											
^	29.845M	34.4	+0.3	+0.3	+5.1	-13.2	+0.0	26.9	29.5	-2.6	Paral
25	27.659M	31.1	+0.3	+0.3	+5.8	-13.2	+0.0	24.3	29.5	-5.2	Paral
QP											
^	27.659M	33.6	+0.3	+0.3	+5.8	-13.2	+0.0	26.8	29.5	-2.7	Paral

Overhead Test Site #1 Date: 3/22/2006 Time: 14:57:48 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 255 Parallel
 Overhead Test Site 1 Position 5 Medium Lines only. Notches off. MODE 2/3. Formal Power

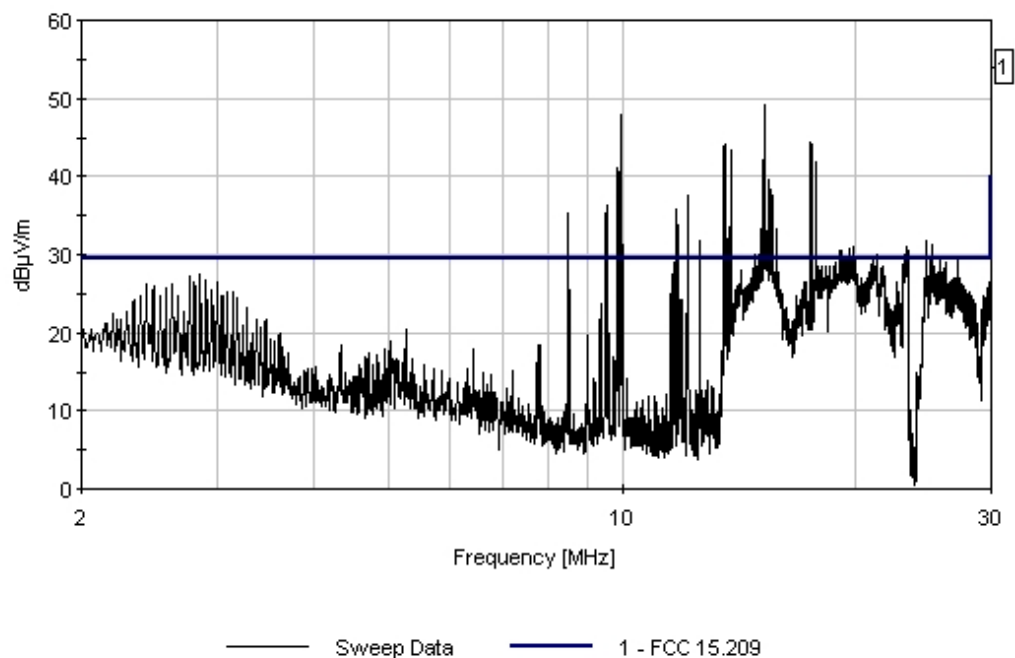

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/22/2006
 Test Type: **Radiated Scan** Time: 15:06:59
 Equipment: **BPL MV Gateway** Sequence#: 256
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.236M	30.1	+0.2	+0.2	+8.7	-13.2	+0.0	26.0	29.5	-3.5	Perpe
QP											
^	14.236M	33.7	+0.2	+0.2	+8.7	-13.2	+0.0	29.6	29.5	+0.1	Perpe
3	19.843M	30.0	+0.2	+0.3	+8.1	-13.2	+0.0	25.4	29.5	-4.1	Perpe
4	15.444M	27.5	+0.2	+0.2	+8.5	-13.2	+0.0	23.2	29.5	-6.3	Perpe
5	25.734M	28.6	+0.2	+0.3	+6.6	-13.2	+0.0	22.5	29.5	-7.0	Perpe
6	20.882M	27.0	+0.2	+0.3	+7.9	-13.2	+0.0	22.2	29.5	-7.3	Perpe
QP											
^	20.882M	30.6	+0.2	+0.3	+7.9	-13.2	+0.0	25.8	29.5	-3.7	Perpe

8	26.227M	26.6	+0.2	+0.3	+6.4	-13.2	+0.0	20.3	29.5	-9.2	Perpe
9	19.370M	24.8	+0.2	+0.3	+8.2	-13.2	+0.0	20.3	29.5	-9.2	Perpe
10	29.860M	26.1	+0.3	+0.3	+5.0	-13.2	+0.0	18.5	29.5	-11.0	Perpe

Overhead Test Site #1 Date: 3/22/2006 Time: 15:06:59 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 256 Perpendicular
Overhead Test Site 1 Position 5 Medium Lines only. Notches off. MODE 2/3. Formal Power

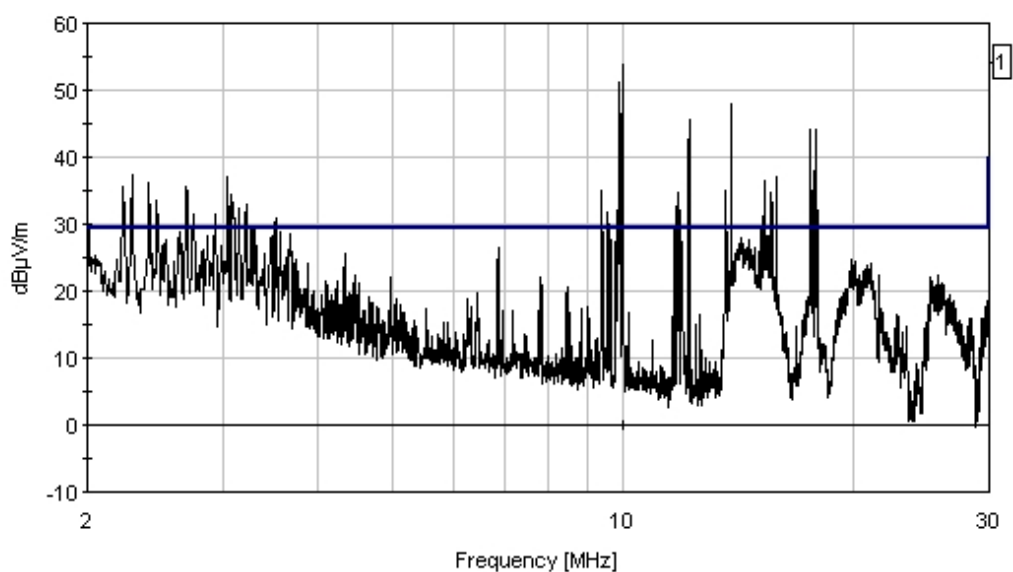

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/22/2006
 Test Type: **Radiated Scan** Time: 15:23:12
 Equipment: **BPL MV Gateway** Sequence#: 257
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	23.156M	30.7	+0.2	+0.3	+7.3	-13.2	+0.0	25.3	29.5	-4.2	Perpe
2	21.097M	30.2	+0.2	+0.3	+7.8	-13.2	+0.0	25.3	29.5	-4.2	Perpe
QP											
^	21.097M	32.6	+0.2	+0.3	+7.8	-13.2	+0.0	27.7	29.5	-1.8	Perpe
4	18.126M	29.4	+0.2	+0.3	+8.3	-13.2	+0.0	25.0	29.5	-4.5	Perpe
5	15.786M	28.7	+0.2	+0.2	+8.5	-13.2	+0.0	24.3	29.5	-5.2	Perpe
QP											
^	15.786M	30.9	+0.2	+0.2	+8.5	-13.2	+0.0	26.6	29.5	-2.9	Perpe

7	14.275M	28.0	+0.2	+0.2	+8.7	-13.2	+0.0	23.9	29.5	-5.6	Perpe
QP											
^	14.275M	32.2	+0.2	+0.2	+8.7	-13.2	+0.0	28.1	29.5	-1.4	Perpe
9	24.695M	29.5	+0.2	+0.3	+7.0	-13.2	+0.0	23.8	29.5	-5.7	Perpe
10	15.103M	27.0	+0.2	+0.2	+8.6	-13.2	+0.0	22.8	29.5	-6.7	Perpe
QP											
^	15.103M	29.8	+0.2	+0.2	+8.6	-13.2	+0.0	25.6	29.5	-3.9	Perpe
12	29.234M	24.6	+0.3	+0.3	+5.3	-13.2	+0.0	17.3	29.5	-12.2	Perpe

Overhead Test Site #1 Date: 3/22/2006 Time: 15:23:12 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 257 Perpendicular
Overhead Test Site 1 Position 6 Medium Lines only. Notches off. MODE 2/3. Formal Power

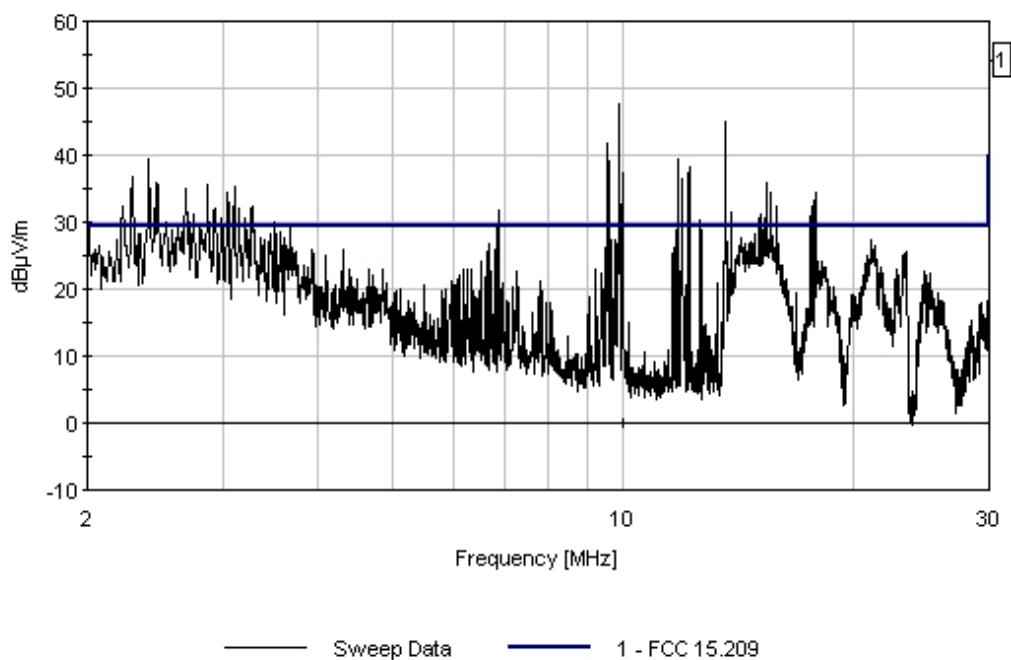

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/22/2006
 Test Type: **Radiated Scan** Time: 15:38:16
 Equipment: **BPL MV Gateway** Sequence#: 258
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	28.601M	36.5	+0.3	+0.3	+5.5	-13.2	+0.0	29.4	29.5	-0.1	Paral
QP											
^	28.601M	39.4	+0.3	+0.3	+5.5	-13.2	+0.0	32.3	29.5	+2.8	Paral
3	19.843M	34.0	+0.2	+0.3	+8.1	-13.2	+0.0	29.4	29.5	-0.1	Paral
QP											
^	19.843M	36.9	+0.2	+0.3	+8.1	-13.2	+0.0	32.3	29.5	+2.8	Paral
5	17.954M	32.7	+0.2	+0.3	+8.3	-13.2	+0.0	28.3	29.5	-1.2	Paral
QP											
^	17.954M	36.2	+0.2	+0.3	+8.3	-13.2	+0.0	31.8	29.5	+2.3	Paral

7	21.097M	33.1	+0.2	+0.3	+7.8	-13.2	+0.0	28.2	29.5	-1.3	Paral
QP											
^	21.097M	35.6	+0.2	+0.3	+7.8	-13.2	+0.0	30.7	29.5	+1.2	Paral
9	19.224M	31.9	+0.2	+0.3	+8.2	-13.2	+0.0	27.4	29.5	-2.1	Paral
QP											
^	19.224M	35.6	+0.2	+0.3	+8.2	-13.2	+0.0	31.1	29.5	+1.6	Paral
11	29.378M	34.7	+0.3	+0.3	+5.2	-13.2	+0.0	27.3	29.5	-2.2	Paral
QP											
^	29.378M	37.4	+0.3	+0.3	+5.2	-13.2	+0.0	30.0	29.5	+0.5	Paral
13	23.439M	31.8	+0.2	+0.3	+7.2	-13.2	+0.0	26.3	29.5	-3.2	Paral
QP											
^	23.439M	34.8	+0.2	+0.3	+7.2	-13.2	+0.0	29.3	29.5	-0.2	Paral
15	25.735M	32.1	+0.2	+0.3	+6.6	-13.2	+0.0	26.0	29.5	-3.5	Paral
QP											
^	25.735M	35.9	+0.2	+0.3	+6.6	-13.2	+0.0	29.8	29.5	+0.3	Paral
17	27.028M	32.1	+0.2	+0.3	+6.1	-13.2	+0.0	25.5	29.5	-4.0	Paral
QP											
^	27.028M	34.7	+0.2	+0.3	+6.1	-13.2	+0.0	28.1	29.5	-1.4	Paral
19	27.838M	31.8	+0.3	+0.3	+5.8	-13.2	+0.0	25.0	29.5	-4.5	Paral
QP											
^	27.838M	34.9	+0.3	+0.3	+5.8	-13.2	+0.0	28.1	29.5	-1.4	Paral
21	21.730M	30.0	+0.2	+0.3	+7.7	-13.2	+0.0	25.0	29.5	-4.5	Paral
QP											
^	21.730M	32.9	+0.2	+0.3	+7.7	-13.2	+0.0	27.8	29.5	-1.7	Paral
23	14.844M	27.1	+0.2	+0.2	+8.6	-13.2	+0.0	22.9	29.5	-6.6	Paral
QP											
^	14.844M	29.9	+0.2	+0.2	+8.6	-13.2	+0.0	25.7	29.5	-3.8	Paral
25	15.291M	26.9	+0.2	+0.2	+8.6	-13.2	+0.0	22.7	29.5	-6.8	Paral

Overhead Test Site #1 Date: 3/22/2006 Time: 15:38:16 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 258 Parallel
Overhead Test Site 1 Position 6 Medium Lines only. Notches off. MODE 2/3. Formal Power

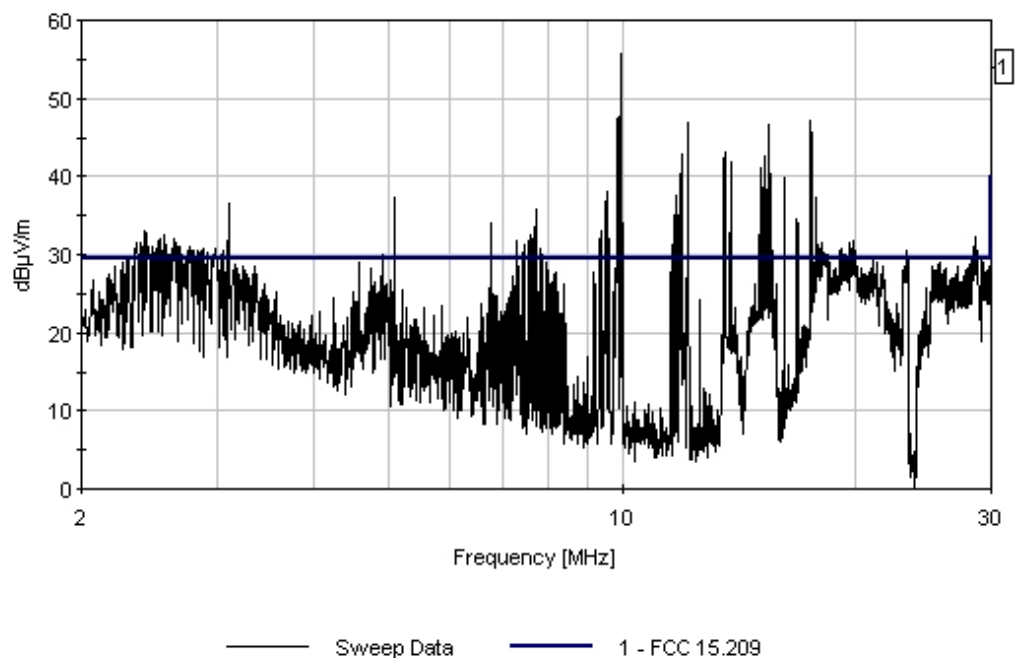

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 09:38:28
 Sequence#: 263
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.954M	33.9	+0.2	+0.3	+8.3	-13.2	+0.0	29.5	29.5	0.0	Paral
QP											
^	17.954M	37.1	+0.2	+0.3	+8.3	-13.2	+0.0	32.7	29.5	+3.2	Paral
3	21.099M	33.3	+0.2	+0.3	+7.8	-13.2	+0.0	28.4	29.5	-1.1	Paral
QP											
^	21.099M	35.7	+0.2	+0.3	+7.8	-13.2	+0.0	30.8	29.5	+1.3	Paral
5	14.497M	32.1	+0.2	+0.2	+8.6	-13.2	+0.0	27.9	29.5	-1.6	Paral
QP											
^	14.497M	35.3	+0.2	+0.2	+8.6	-13.2	+0.0	31.1	29.5	+1.6	Paral

7	29.842M	35.4	+0.3	+0.3	+5.1	-13.2	+0.0	27.8	29.5	-1.7	Paral
QP											
^	29.842M	37.5	+0.3	+0.3	+5.1	-13.2	+0.0	30.0	29.5	+0.5	Paral
9	19.715M	30.3	+0.2	+0.3	+8.1	-13.2	+0.0	25.7	29.5	-3.8	Paral
QP											
^	19.715M	33.9	+0.2	+0.3	+8.1	-13.2	+0.0	29.3	29.5	-0.2	Paral
11	27.336M	31.4	+0.2	+0.3	+6.0	-13.2	+0.0	24.7	29.5	-4.8	Paral
12	22.660M	29.7	+0.2	+0.3	+7.4	-13.2	+0.0	24.4	29.5	-5.1	Paral
13	21.568M	29.1	+0.2	+0.3	+7.7	-13.2	+0.0	24.1	29.5	-5.4	Paral
QP											
^	21.568M	34.8	+0.2	+0.3	+7.7	-13.2	+0.0	29.8	29.5	+0.3	Paral
15	24.748M	29.5	+0.2	+0.3	+7.0	-13.2	+0.0	23.8	29.5	-5.7	Paral
QP											
^	24.748M	32.7	+0.2	+0.3	+7.0	-13.2	+0.0	27.0	29.5	-2.5	Paral
17	25.205M	29.4	+0.2	+0.3	+6.8	-13.2	+0.0	23.5	29.5	-6.0	Paral
QP											
^	25.205M	33.2	+0.2	+0.3	+6.8	-13.2	+0.0	27.3	29.5	-2.2	Paral
19	26.043M	29.6	+0.2	+0.3	+6.5	-13.2	+0.0	23.4	29.5	-6.1	Paral
QP											
^	26.043M	32.8	+0.2	+0.3	+6.5	-13.2	+0.0	26.6	29.5	-2.9	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 09:38:28 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 263 Parallel
 Overhead Test Site 1 Position 7 Medium Lines only. Notches off. MODE 2/3. Formal Power

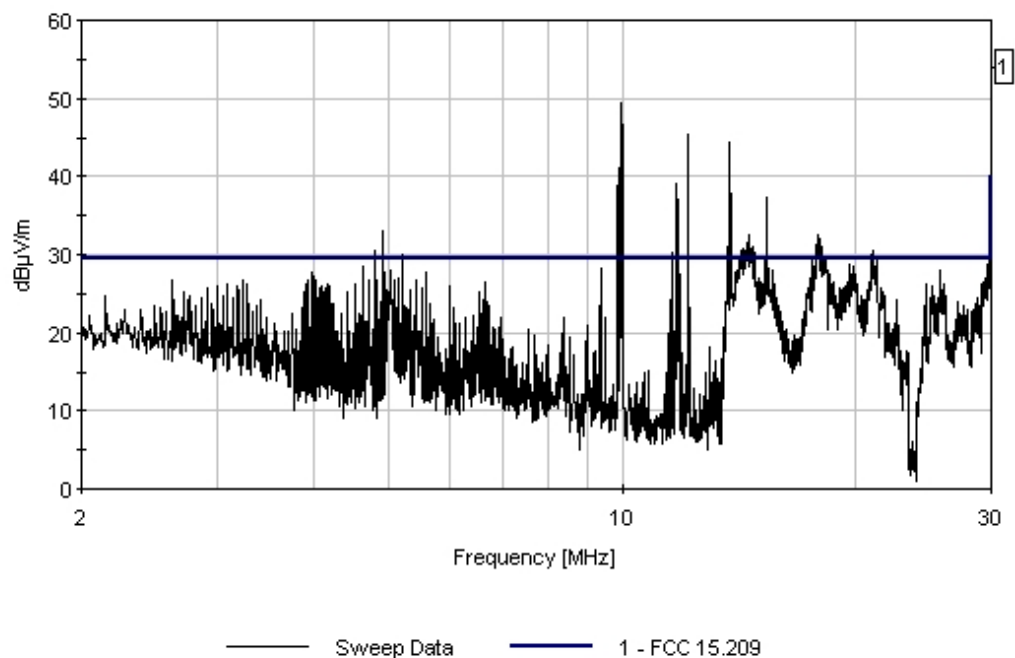

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: 6749420821

Date: 3/23/2006
Time: 09:51:56
Sequence#: 264
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	19.999M	29.9	+0.2	+0.3	+8.1	-13.2	+0.0	25.3	29.5	-4.2	Perpe
QP											
^	19.999M	32.6	+0.2	+0.3	+8.1	-13.2	+0.0	28.0	29.5	-1.5	Perpe
3	22.661M	30.2	+0.2	+0.3	+7.4	-13.2	+0.0	24.9	29.5	-4.6	Perpe
4	20.510M	29.6	+0.2	+0.3	+8.0	-13.2	+0.0	24.9	29.5	-4.6	Perpe
QP											
^	20.510M	33.7	+0.2	+0.3	+8.0	-13.2	+0.0	29.0	29.5	-0.5	Perpe
6	21.792M	28.6	+0.2	+0.3	+7.6	-13.2	+0.0	23.5	29.5	-6.0	Perpe

7	23.086M	28.6	+0.2	+0.3	+7.3	-13.2	+0.0	23.2	29.5	-6.3	Perpe
QP											
^	23.086M	31.9	+0.2	+0.3	+7.3	-13.2	+0.0	26.5	29.5	-3.0	Perpe
9	14.409M	25.8	+0.2	+0.2	+8.6	-13.2	+0.0	21.6	29.5	-7.9	Perpe
10	29.843M	26.4	+0.3	+0.3	+5.1	-13.2	+0.0	18.9	29.5	-10.6	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 09:51:56 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 264 Perpendicular
Overhead Test Site 1 Position 7 Medium Lines only. Notches off. MODE 2/3. Formal Power

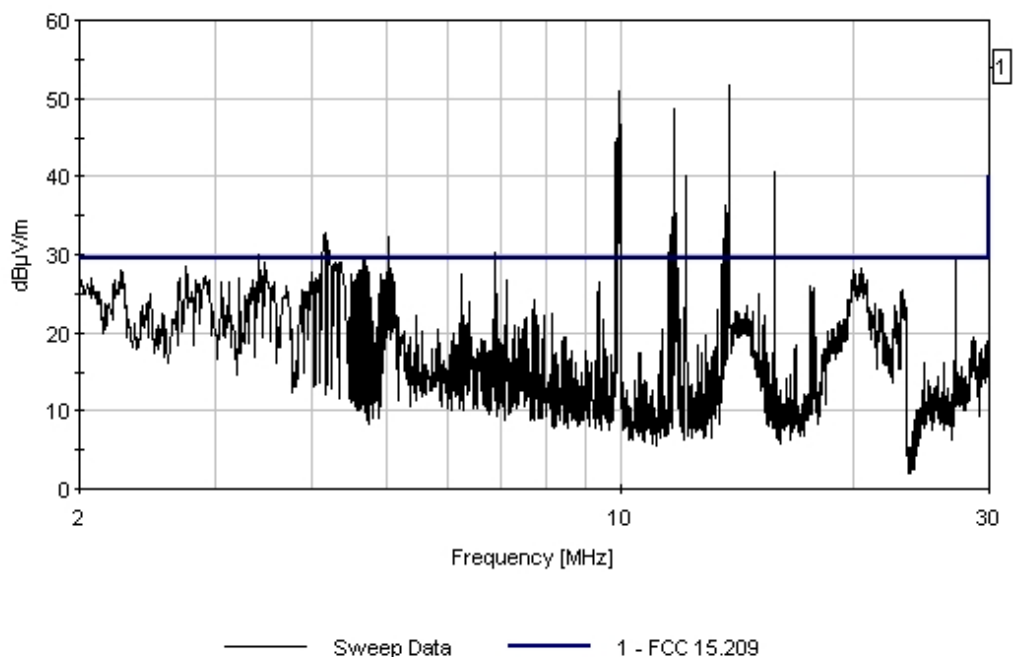

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 10:29:06
 Sequence#: 267
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	20.001M	32.5	+0.2	+0.3	+8.1	-13.2	+0.0	27.9	29.5	-1.6	Paral
QP											
^	20.001M	35.0	+0.2	+0.3	+8.1	-13.2	+0.0	30.4	29.5	+0.9	Paral
3	19.841M	31.8	+0.2	+0.3	+8.1	-13.2	+0.0	27.2	29.5	-2.3	Paral
QP											
^	19.841M	34.5	+0.2	+0.3	+8.1	-13.2	+0.0	29.9	29.5	+0.4	Paral
5	20.883M	31.4	+0.2	+0.3	+7.9	-13.2	+0.0	26.6	29.5	-2.9	Paral
QP											
^	20.883M	34.9	+0.2	+0.3	+7.9	-13.2	+0.0	30.1	29.5	+0.6	Paral

7	14.538M	30.6	+0.2	+0.2	+8.6	-13.2	+0.0	26.4	29.5	-3.1	Paral
QP											
^	14.538M	33.7	+0.2	+0.2	+8.6	-13.2	+0.0	29.5	29.5	+0.0	Paral
9	17.959M	30.1	+0.2	+0.3	+8.3	-13.2	+0.0	25.7	29.5	-3.8	Paral
QP											
^	17.959M	32.8	+0.2	+0.3	+8.3	-13.2	+0.0	28.3	29.5	-1.2	Paral
11	21.367M	30.3	+0.2	+0.3	+7.7	-13.2	+0.0	25.3	29.5	-4.2	Paral
QP											
^	21.367M	32.6	+0.2	+0.3	+7.7	-13.2	+0.0	27.5	29.5	-2.0	Paral
13	15.705M	28.7	+0.2	+0.2	+8.5	-13.2	+0.0	24.4	29.5	-5.1	Paral
QP											
^	15.705M	31.4	+0.2	+0.2	+8.5	-13.2	+0.0	27.1	29.5	-2.4	Paral
15	18.588M	28.6	+0.2	+0.3	+8.2	-13.2	+0.0	24.1	29.5	-5.4	Paral
QP											
^	18.588M	31.7	+0.2	+0.3	+8.2	-13.2	+0.0	27.1	29.5	-2.4	Paral
17	24.748M	29.6	+0.2	+0.3	+7.0	-13.2	+0.0	23.9	29.5	-5.6	Paral
18	29.841M	30.7	+0.3	+0.3	+5.1	-13.2	+0.0	23.2	29.5	-6.3	Paral
QP											
^	29.841M	33.2	+0.3	+0.3	+5.1	-13.2	+0.0	25.7	29.5	-3.8	Paral
20	26.100M	28.8	+0.2	+0.3	+6.5	-13.2	+0.0	22.6	29.5	-6.9	Paral
21	22.658M	27.1	+0.2	+0.3	+7.4	-13.2	+0.0	21.8	29.5	-7.7	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 10:29:06 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 267 Parallel
Overhead Test Site 1 Position 8 Medium Lines only. Notches off. MODE 2/3. Formal Power

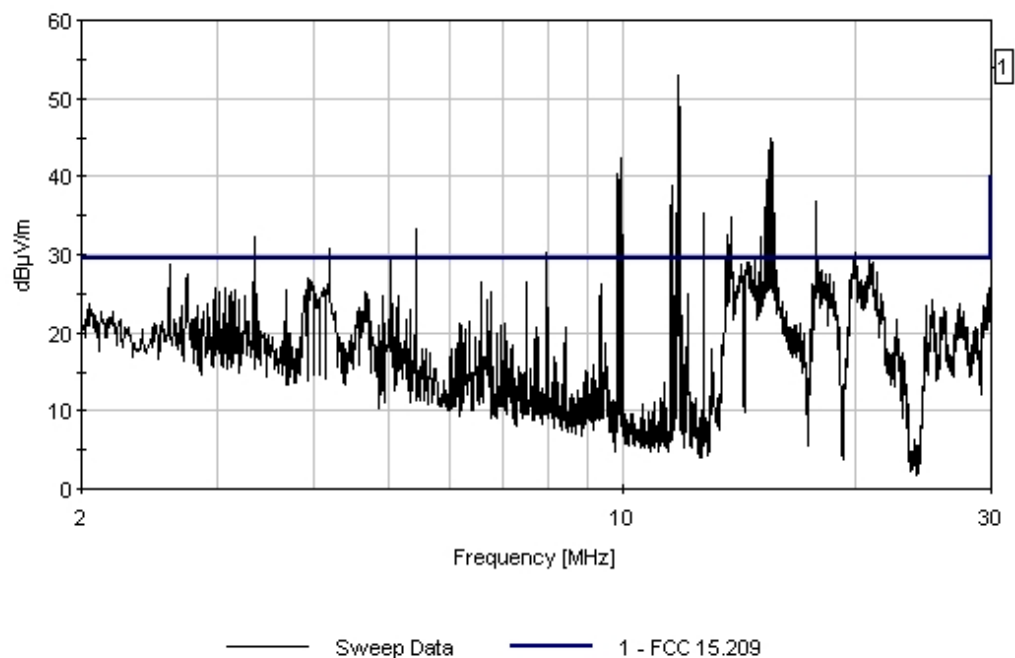

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 10:41:35
 Equipment: **BPL MV Gateway** Sequence#: 268
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	19.842M	31.9	+0.2	+0.3	+8.1	-13.2	+0.0	27.3	29.5	-2.2	Perpe
QP											
^	19.842M	34.7	+0.2	+0.3	+8.1	-13.2	+0.0	30.1	29.5	+0.6	Perpe
3	15.703M	30.1	+0.2	+0.2	+8.5	-13.2	+0.0	25.8	29.5	-3.7	Perpe
QP											
^	15.703M	32.4	+0.2	+0.2	+8.5	-13.2	+0.0	28.1	29.5	-1.4	Perpe
5	21.569M	30.3	+0.2	+0.3	+7.7	-13.2	+0.0	25.3	29.5	-4.2	Perpe
6	18.751M	29.8	+0.2	+0.3	+8.2	-13.2	+0.0	25.3	29.5	-4.2	Perpe
QP											
^	18.751M	32.5	+0.2	+0.3	+8.2	-13.2	+0.0	28.0	29.5	-1.5	Perpe

8	14.849M	29.5	+0.2	+0.2	+8.6	-13.2	+0.0	25.3	29.5	-4.2	Perpe
QP											
^	14.849M	32.8	+0.2	+0.2	+8.6	-13.2	+0.0	28.6	29.5	-0.9	Perpe
10	18.379M	28.9	+0.2	+0.3	+8.2	-13.2	+0.0	24.4	29.5	-5.1	Perpe
QP											
^	18.379M	31.9	+0.2	+0.3	+8.2	-13.2	+0.0	27.4	29.5	-2.1	Perpe
12	23.155M	28.9	+0.2	+0.3	+7.3	-13.2	+0.0	23.5	29.5	-6.0	Perpe
QP											
^	23.155M	32.2	+0.2	+0.3	+7.3	-13.2	+0.0	26.8	29.5	-2.7	Perpe
14	24.662M	28.1	+0.2	+0.3	+7.0	-13.2	+0.0	22.4	29.5	-7.1	Perpe
15	27.193M	28.2	+0.2	+0.3	+6.0	-13.2	+0.0	21.5	29.5	-8.0	Perpe
16	28.435M	27.3	+0.3	+0.3	+5.6	-13.2	+0.0	20.3	29.5	-9.2	Perpe
17	29.088M	27.0	+0.3	+0.3	+5.3	-13.2	+0.0	19.7	29.5	-9.8	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 10:41:35 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 268 Perpendicular
Overhead Test Site 1 Position 8 Medium Lines only. Notches off. MODE 2/3. Formal Power

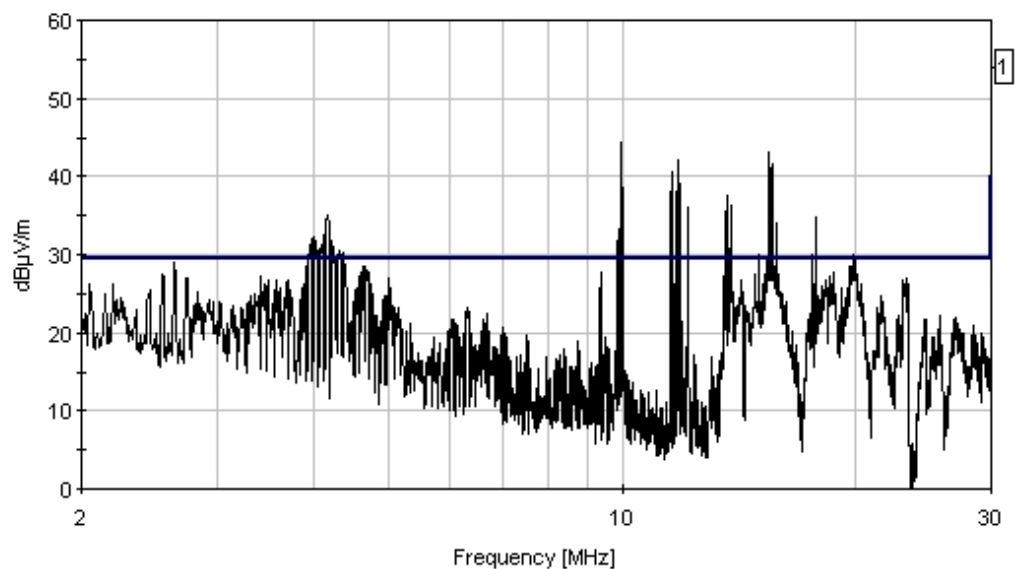

— Sweep Data — 1 - FCC 15.209

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •
 Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 11:23:25
 Equipment: **BPL MV Gateway** Sequence#: 269
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 53.47 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.847M	30.9	+0.2	+0.2	+8.6	-13.2	+0.0	26.7	29.5	-2.8	Paral
QP											
^	14.847M	34.2	+0.2	+0.2	+8.6	-13.2	+0.0	30.0	29.5	+0.5	Paral
3	15.228M	26.0	+0.2	+0.2	+8.6	-13.2	+0.0	21.8	29.5	-7.7	Paral
QP											
^	15.228M	29.9	+0.2	+0.2	+8.6	-13.2	+0.0	25.7	29.5	-3.8	Paral
5	24.751M	26.2	+0.2	+0.3	+7.0	-13.2	+0.0	20.5	29.5	-9.0	Paral
6	23.338M	23.2	+0.2	+0.3	+7.3	-13.2	+0.0	17.8	29.5	-11.7	Paral
7	20.005M	22.3	+0.2	+0.3	+8.1	-13.2	+0.0	17.7	29.5	-11.8	Paral
8	29.845M	22.5	+0.3	+0.3	+5.1	-13.2	+0.0	15.0	29.5	-14.5	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 11:23:25 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 269 Parallel
 Overhead Test Site 1 Position 9 Medium Lines only. Notches off. MODE 2/3. Formal Power

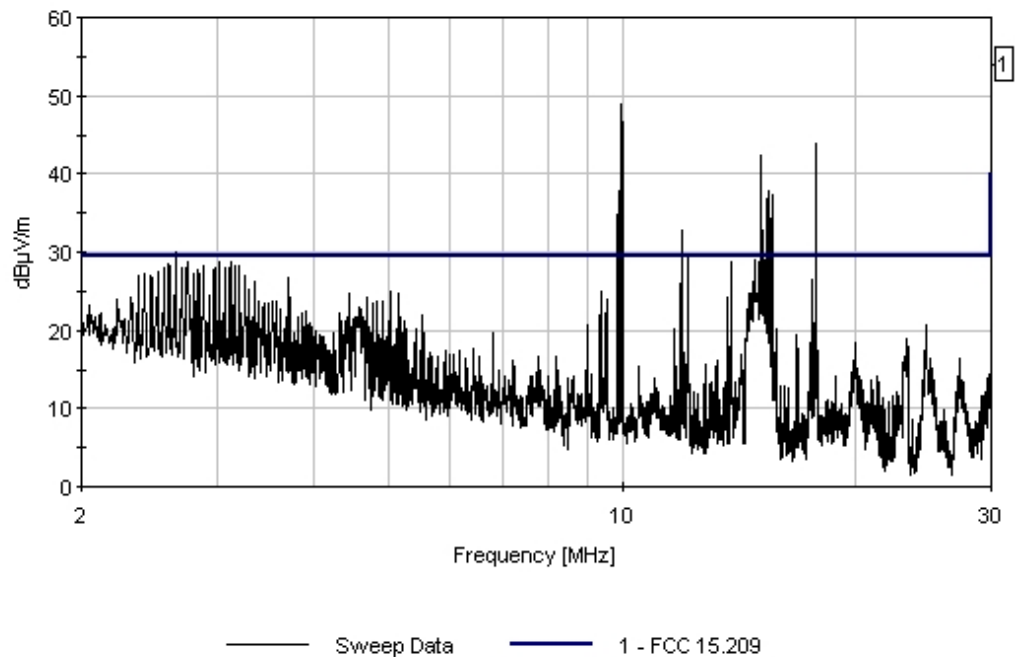

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •
 Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: Corinex
 Model: MV Gateway

Date: 3/23/2006
 Time: 11:16:49
 Sequence#: 270
 Tested By: C. Nicklas
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 53.47 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	18.345M	29.2	+0.2	+0.3	+8.3	-13.2	+0.0	24.8	29.5	-4.7	Perpe
2	18.747M	28.5	+0.2	+0.3	+8.2	-13.2	+0.0	24.0	29.5	-5.5	Perpe
3	17.958M	27.4	+0.2	+0.3	+8.3	-13.2	+0.0	23.0	29.5	-6.5	Perpe
^	17.958M	30.1	+0.2	+0.3	+8.3	-13.2	+0.0	25.7	29.5	-3.8	Perpe
5	20.003M	27.1	+0.2	+0.3	+8.1	-13.2	+0.0	22.5	29.5	-7.0	Perpe
6	17.345M	25.0	+0.2	+0.3	+8.3	-13.2	+0.0	20.6	29.5	-8.9	Perpe
7	15.750M	23.6	+0.2	+0.2	+8.5	-13.2	+0.0	19.3	29.5	-10.2	Perpe
8	23.083M	23.8	+0.2	+0.3	+7.3	-13.2	+0.0	18.4	29.5	-11.1	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 11:16:49 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 270 Perpendicular
 Overhead Test Site 1 Position 9 Medium Lines only, Notches off, MODE 2/3, Formal Power

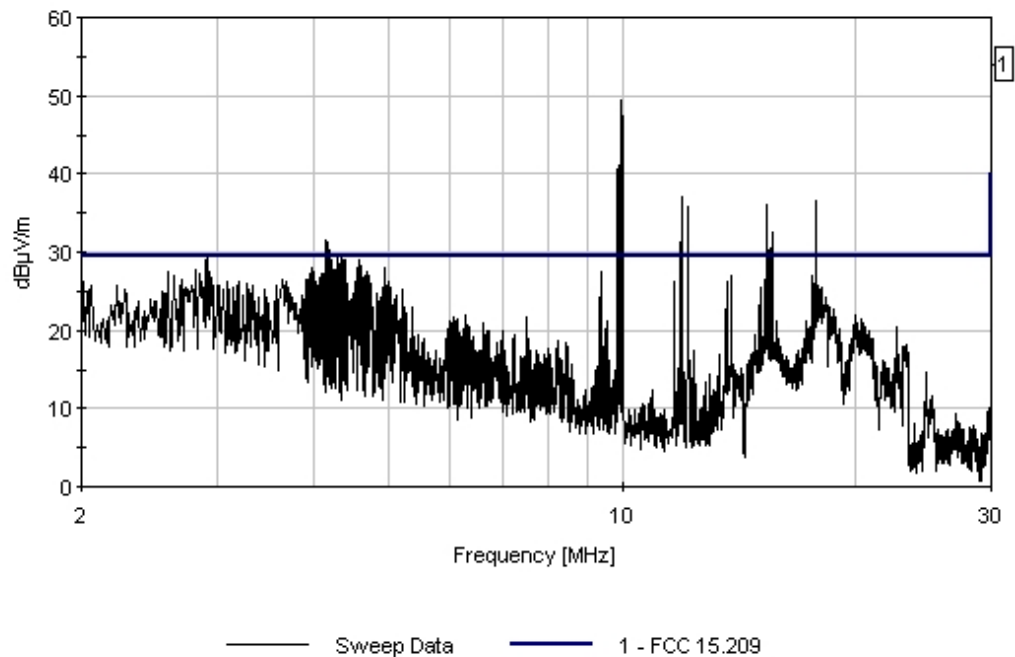

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 11:35:19
 Equipment: **BPL MV Gateway** Sequence#: 271
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	13.752M	29.3	+0.2	+0.2	+8.7	-13.2	+0.0	25.2	29.5	-4.3	Paral
2	14.811M	28.8	+0.2	+0.2	+8.6	-13.2	+0.0	24.6	29.5	-4.9	Paral
3	18.127M	28.6	+0.2	+0.3	+8.3	-13.2	+0.0	24.2	29.5	-5.3	Paral
4	15.375M	28.3	+0.2	+0.2	+8.6	-13.2	+0.0	24.1	29.5	-5.4	Paral
5	15.781M	26.2	+0.2	+0.2	+8.5	-13.2	+0.0	21.9	29.5	-7.6	Paral
6	26.240M	27.4	+0.2	+0.3	+6.4	-13.2	+0.0	21.1	29.5	-8.4	Paral

7	28.313M	27.9	+0.3	+0.3	+5.6	-13.2	+0.0	20.9	29.5	-8.6	Paral
8	22.669M	24.8	+0.2	+0.3	+7.4	-13.2	+0.0	19.5	29.5	-10.0	Paral
9	21.730M	23.7	+0.2	+0.3	+7.7	-13.2	+0.0	18.7	29.5	-10.8	Paral
10	25.224M	24.2	+0.2	+0.3	+6.8	-13.2	+0.0	18.3	29.5	-11.2	Paral
11	23.070M	23.5	+0.2	+0.3	+7.3	-13.2	+0.0	18.1	29.5	-11.4	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 11:35:19 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 271 Parallel
Overhead Test Site 1 Position 10 Medium Lines only. Notches off. MODE 2/3. Formal Power

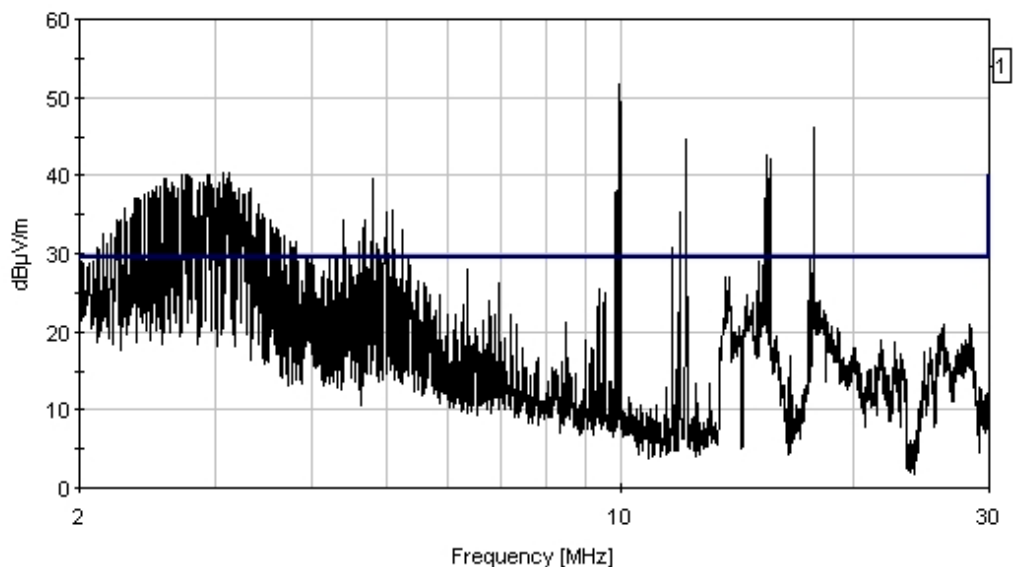

— Sweep Data — 1 - FCC 15.209

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: 6749420821

Date: 3/23/2006
Time: 11:44:29
Sequence#: 272
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.847M	30.0	+0.2	+0.2	+8.6	-13.2	+0.0	25.8	29.5	-3.7	Perpe
QP											
^	14.847M	33.2	+0.2	+0.2	+8.6	-13.2	+0.0	29.0	29.5	-0.5	Perpe
3	15.375M	28.9	+0.2	+0.2	+8.6	-13.2	+0.0	24.7	29.5	-4.8	Perpe
4	15.788M	28.9	+0.2	+0.2	+8.5	-13.2	+0.0	24.6	29.5	-4.9	Perpe
5	13.753M	27.4	+0.2	+0.2	+8.7	-13.2	+0.0	23.3	29.5	-6.2	Perpe
QP											
^	13.753M	30.1	+0.2	+0.2	+8.7	-13.2	+0.0	26.0	29.5	-3.5	Perpe

7	19.126M	21.8	+0.2	+0.3	+8.2	-13.2	+0.0	17.3	29.5	-12.2	Perpe
8	28.450M	23.9	+0.3	+0.3	+5.6	-13.2	+0.0	16.9	29.5	-12.6	Perpe
9	24.780M	21.3	+0.2	+0.3	+6.9	-13.2	+0.0	15.5	29.5	-14.0	Perpe
10	21.080M	19.7	+0.2	+0.3	+7.8	-13.2	+0.0	14.8	29.5	-14.7	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 11:44:29 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 272 Perpendicular
Overhead Test Site 1 Position 10 Medium Lines only. Notches off. MODE 2/3. Formal Power

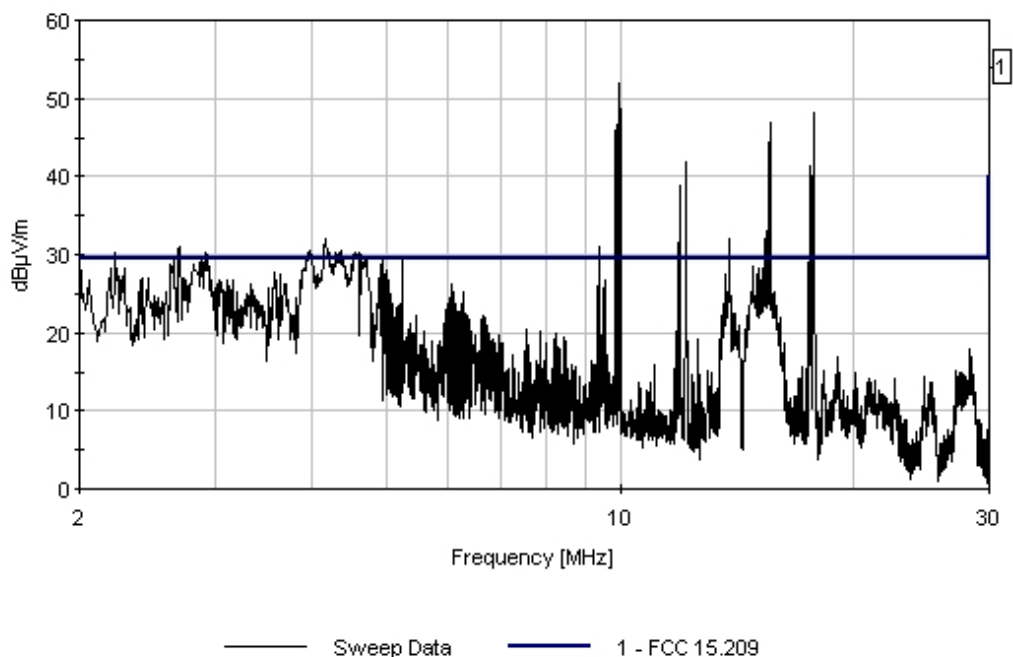

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 11:56:53
 Sequence#: 273
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.700M	21.6	+0.2	+0.2	+8.6	-13.2	+0.0	17.4	29.5	-12.1	Perpe
2	17.340M	20.6	+0.2	+0.3	+8.3	-13.2	+0.0	16.2	29.5	-13.3	Perpe
3	15.545M	20.3	+0.2	+0.2	+8.5	-13.2	+0.0	16.0	29.5	-13.5	Perpe
4	15.810M	20.2	+0.2	+0.2	+8.5	-13.2	+0.0	15.9	29.5	-13.6	Perpe
5	18.810M	19.2	+0.2	+0.3	+8.2	-13.2	+0.0	14.7	29.5	-14.8	Perpe
6	21.350M	18.5	+0.2	+0.3	+7.7	-13.2	+0.0	13.5	29.5	-16.0	Perpe
7	26.225M	19.0	+0.2	+0.3	+6.4	-13.2	+0.0	12.7	29.5	-16.8	Perpe

8	23.338M	16.9	+0.2	+0.3	+7.3	-13.2	+0.0	11.5	29.5	-18.0	Perpe
9	27.575M	17.8	+0.3	+0.3	+5.9	-13.2	+0.0	11.1	29.5	-18.4	Perpe
10	24.738M	16.5	+0.2	+0.3	+7.0	-13.2	+0.0	10.8	29.5	-18.7	Perpe
11	28.463M	17.8	+0.3	+0.3	+5.5	-13.2	+0.0	10.7	29.5	-18.8	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 11:56:53 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 273 Perpendicular
Overhead Test Site 1 Position 11 Medium Lines only. Notches off. MODE 2/3. Formal Power

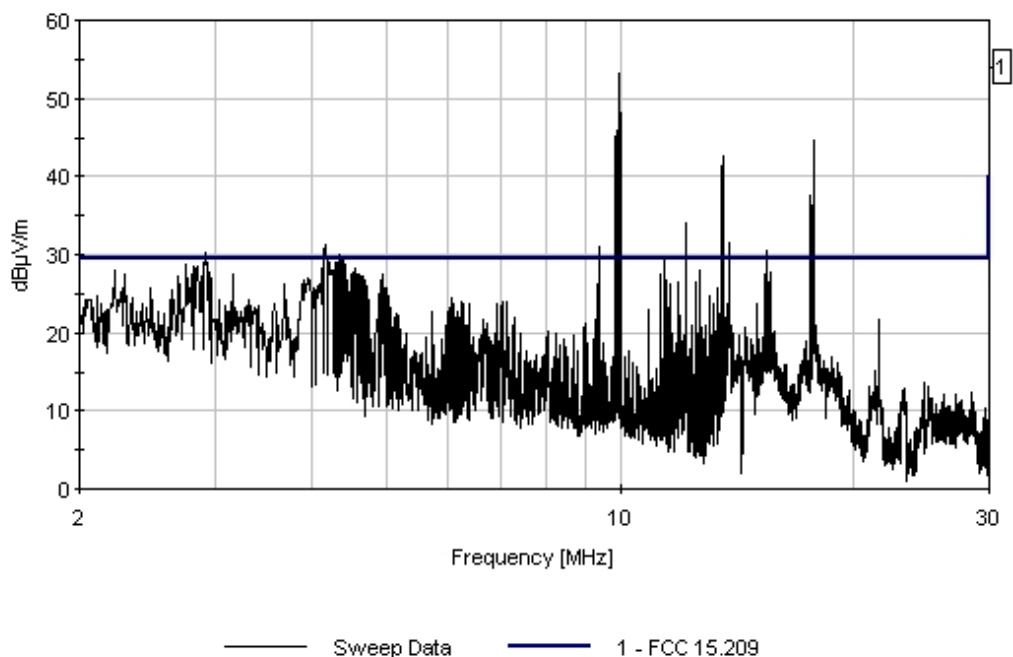

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 12:02:48
 Equipment: **BPL MV Gateway** Sequence#: 274
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	19.226M	29.5	+0.2	+0.3	+8.2	-13.2	+0.0	25.0	29.5	-4.5	Paral
2	19.841M	27.8	+0.2	+0.3	+8.1	-13.2	+0.0	23.2	29.5	-6.3	Paral
3	18.347M	27.3	+0.2	+0.3	+8.2	-13.2	+0.0	22.8	29.5	-6.7	Paral
QP											
^	18.347M	30.8	+0.2	+0.3	+8.2	-13.2	+0.0	26.3	29.5	-3.2	Paral
5	15.995M	25.9	+0.2	+0.2	+8.5	-13.2	+0.0	21.6	29.5	-7.9	Paral
6	15.780M	25.0	+0.2	+0.2	+8.5	-13.2	+0.0	20.7	29.5	-8.8	Paral
7	14.765M	24.2	+0.2	+0.2	+8.6	-13.2	+0.0	20.0	29.5	-9.5	Paral

8	21.391M	22.4	+0.2	+0.3	+7.7	-13.2	+0.0	17.4	29.5	-12.1	Paral
9	26.138M	22.3	+0.2	+0.3	+6.4	-13.2	+0.0	16.0	29.5	-13.5	Paral
10	29.713M	22.6	+0.3	+0.3	+5.1	-13.2	+0.0	15.1	29.5	-14.4	Paral
11	28.313M	22.0	+0.3	+0.3	+5.6	-13.2	+0.0	15.0	29.5	-14.5	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 12:02:48 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 274 Parallel
Overhead Test Site 1 Position 11 Medium Lines only. Notches off. MODE 2/3. Formal Power

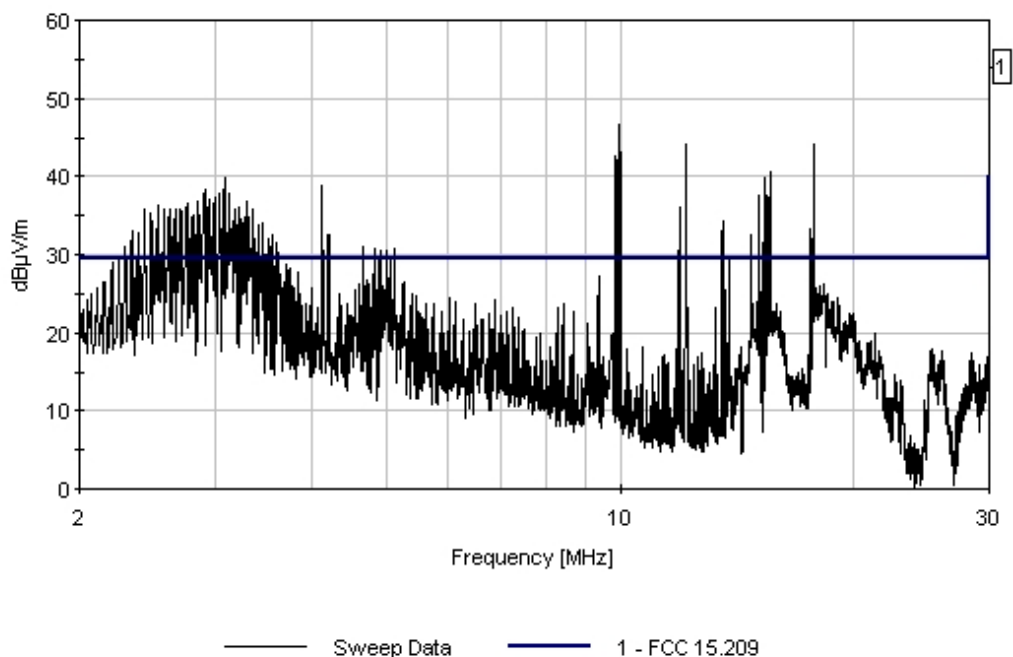

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/23/2006
 Test Type: **Radiated Scan** Time: 12:11:33
 Equipment: **BPL MV Gateway** Sequence#: 275
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6749420821

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \log(30/14) = -13.22\text{dB}$. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.847M	32.3	+0.2	+0.2	+8.6	-13.2	+0.0	28.1	29.5	-1.4	Paral
QP											
^	14.847M	35.5	+0.2	+0.2	+8.6	-13.2	+0.0	31.3	29.5	+1.8	Paral
3	15.827M	29.4	+0.2	+0.2	+8.5	-13.2	+0.0	25.1	29.5	-4.4	Paral
4	26.221M	27.5	+0.2	+0.3	+6.4	-13.2	+0.0	21.2	29.5	-8.3	Paral
5	19.249M	24.9	+0.2	+0.3	+8.2	-13.2	+0.0	20.4	29.5	-9.1	Paral
6	18.362M	24.1	+0.2	+0.3	+8.2	-13.2	+0.0	19.6	29.5	-9.9	Paral
7	28.299M	24.4	+0.3	+0.3	+5.6	-13.2	+0.0	17.4	29.5	-12.1	Paral

8	21.388M	22.0	+0.2	+0.3	+7.7	-13.2	+0.0	17.0	29.5	-12.5	Paral
9	24.750M	21.8	+0.2	+0.3	+7.0	-13.2	+0.0	16.1	29.5	-13.4	Paral
10	23.450M	21.2	+0.2	+0.3	+7.2	-13.2	+0.0	15.7	29.5	-13.8	Paral
11	29.868M	19.7	+0.3	+0.3	+5.0	-13.2	+0.0	12.1	29.5	-17.4	Paral

Overhead Test Site #1 Date: 3/23/2006 Time: 12:11:33 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 275 Parallel
Overhead Test Site 1 Position 12 Medium Lines only. Notches off. MODE 2/3. Formal Power

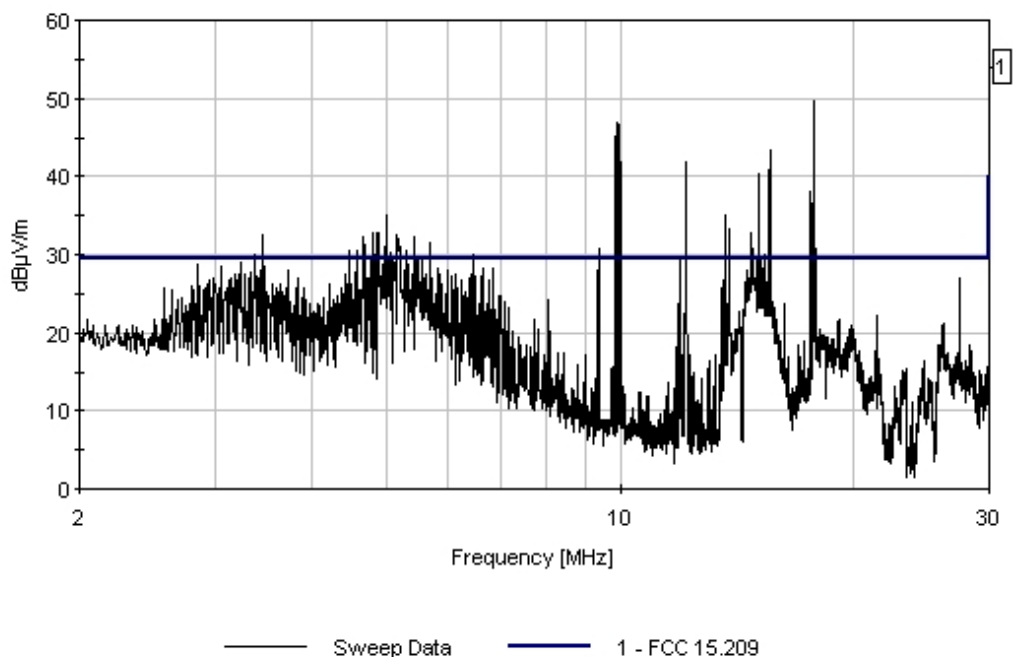

Test Location: Overhead Test Site #1 • Post Street East of Cochran Street • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6749420821**

Date: 3/23/2006
 Time: 12:21:51
 Sequence#: 276
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6749420821
Overhead Coupler	Arteche	Overcap-S-17	0517347/51
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #1 Post Street east of Cochran Street, Houston, TX. Unit on third pole from the end on the street on the North side of the street. Medium voltage wires are 35 feet above the street or ~10.7 meters. Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.0 meters. Slant Distance and Test Distance correction factor is $-40 \cdot \text{LOG}(30/14) = -13.22\text{dB}$. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Unit is setup for maximum transmission over the medium voltage lines with the Formal Power Profile for overhead lines only. Notch Filters are off line. Running with MODE2/MODE3 filters in place. Formal Power Profile.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S1

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.780M	31.3	+0.2	+0.2	+8.5	-13.2	+0.0	27.0	29.5	-2.5	Perpe
QP											
^	15.780M	33.7	+0.2	+0.2	+8.5	-13.2	+0.0	29.4	29.5	-0.1	Perpe
3	14.849M	30.4	+0.2	+0.2	+8.6	-13.2	+0.0	26.2	29.5	-3.3	Perpe
QP											
^	14.849M	34.1	+0.2	+0.2	+8.6	-13.2	+0.0	29.9	29.5	+0.4	Perpe
5	26.103M	31.7	+0.2	+0.3	+6.5	-13.2	+0.0	25.5	29.5	-4.0	Perpe
6	18.748M	29.8	+0.2	+0.3	+8.2	-13.2	+0.0	25.3	29.5	-4.2	Perpe
QP											
^	18.748M	32.4	+0.2	+0.3	+8.2	-13.2	+0.0	27.9	29.5	-1.6	Perpe

8	17.342M	29.6	+0.2	+0.3	+8.3	-13.2	+0.0	25.2	29.5	-4.3	Perpe
9	24.748M	29.1	+0.2	+0.3	+7.0	-13.2	+0.0	23.3	29.5	-6.2	Perpe
10	19.102M	26.4	+0.2	+0.3	+8.2	-13.2	+0.0	21.9	29.5	-7.6	Perpe
QP											
^	19.102M	30.3	+0.2	+0.3	+8.2	-13.2	+0.0	25.8	29.5	-3.7	Perpe
12	27.574M	26.7	+0.3	+0.3	+5.9	-13.2	+0.0	20.0	29.5	-9.5	Perpe
13	21.372M	24.1	+0.2	+0.3	+7.7	-13.2	+0.0	19.1	29.5	-10.4	Perpe
14	29.123M	25.1	+0.3	+0.3	+5.3	-13.2	+0.0	17.8	29.5	-11.7	Perpe
15	29.903M	23.8	+0.3	+0.3	+5.0	-13.2	+0.0	16.2	29.5	-13.3	Perpe
16	23.431M	20.8	+0.2	+0.3	+7.2	-13.2	+0.0	15.3	29.5	-14.2	Perpe

Overhead Test Site #1 Date: 3/23/2006 Time: 12:21:51 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 276 Perpendicular
Overhead Test Site 1 Position 12 Medium Lines only. Notches off. MODE 2/3. Formal Power

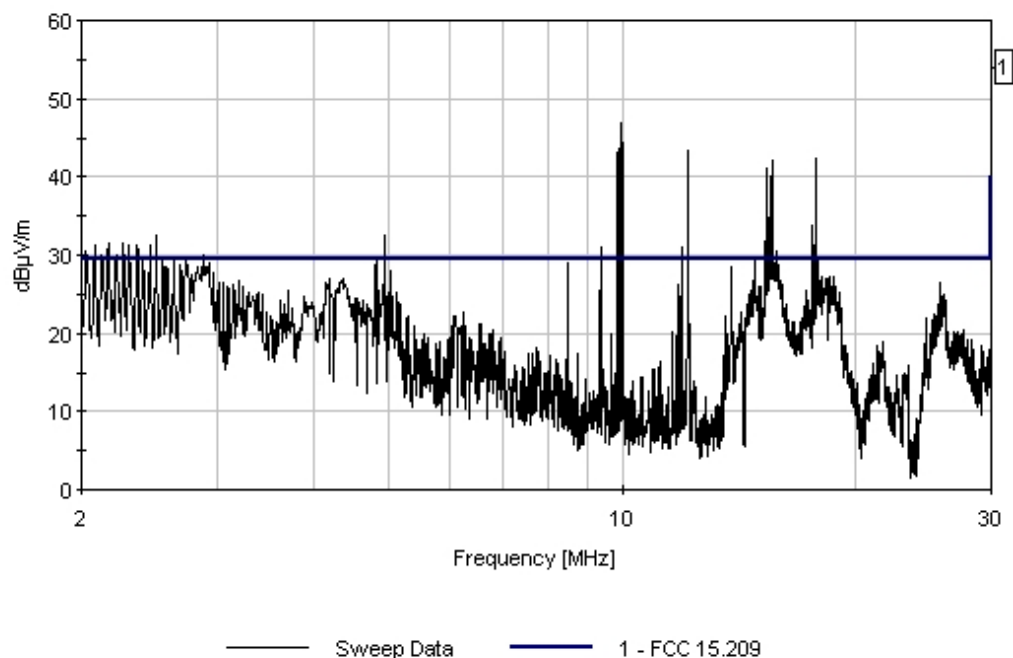

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 10:26:10
 Sequence#: 319
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly out from pole where box is installed. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	8.287M	32.2	+0.1	+0.2	+9.1	-12.8	+0.0	28.8	29.5	-0.7	Perpe
QP											
^	8.287M	34.8	+0.1	+0.2	+9.1	-12.8	+0.0	31.4	29.5	+1.9	Perpe
3	12.346M	30.8	+0.2	+0.2	+8.8	-12.8	+0.0	27.2	29.5	-2.3	Perpe
QP											
^	12.346M	33.7	+0.2	+0.2	+8.8	-12.8	+0.0	30.1	29.5	+0.6	Perpe
5	8.907M	30.1	+0.1	+0.2	+9.1	-12.8	+0.0	26.7	29.5	-2.8	Perpe
QP											
^	8.907M	33.6	+0.1	+0.2	+9.1	-12.8	+0.0	30.2	29.5	+0.7	Perpe

7	17.963M	30.1	+0.2	+0.3	+8.3	-12.8	+0.0	26.1	29.5	-3.4	Perpe
QP											
^	17.963M	33.0	+0.2	+0.3	+8.3	-12.8	+0.0	29.0	29.5	-0.5	Perpe
9	16.947M	30.1	+0.2	+0.2	+8.4	-12.8	+0.0	26.1	29.5	-3.4	Perpe
QP											
^	16.947M	33.3	+0.2	+0.2	+8.4	-12.8	+0.0	29.3	29.5	-0.2	Perpe
11	16.341M	29.9	+0.2	+0.2	+8.5	-12.8	+0.0	26.0	29.5	-3.5	Perpe
QP											
^	16.341M	34.1	+0.2	+0.2	+8.5	-12.8	+0.0	30.1	29.5	+0.6	Perpe
13	7.346M	29.3	+0.1	+0.2	+9.2	-12.8	+0.0	26.0	29.5	-3.5	Perpe
QP											
^	7.346M	32.2	+0.1	+0.2	+9.2	-12.8	+0.0	28.9	29.5	-0.6	Perpe
15	13.752M	29.5	+0.2	+0.2	+8.7	-12.8	+0.0	25.8	29.5	-3.7	Perpe
QP											
^	13.752M	32.7	+0.2	+0.2	+8.7	-12.8	+0.0	29.0	29.5	-0.5	Perpe
17	4.259M	29.2	+0.1	+0.2	+9.2	-12.8	+0.0	25.8	29.5	-3.7	Perpe
QP											
^	4.259M	32.5	+0.1	+0.2	+9.2	-12.8	+0.0	29.2	29.5	-0.3	Perpe
19	14.841M	29.5	+0.2	+0.2	+8.6	-12.8	+0.0	25.7	29.5	-3.8	Perpe
QP											
^	14.841M	32.5	+0.2	+0.2	+8.6	-12.8	+0.0	28.7	29.5	-0.8	Perpe
21	5.663M	27.3	+0.1	+0.1	+9.2	-12.8	+0.0	23.9	29.5	-5.6	Perpe
QP											
^	5.663M	31.2	+0.1	+0.1	+9.2	-12.8	+0.0	27.7	29.5	-1.8	Perpe
23	10.458M	26.5	+0.1	+0.2	+9.0	-12.8	+0.0	23.0	29.5	-6.5	Perpe
QP											
^	10.458M	29.7	+0.1	+0.2	+9.0	-12.8	+0.0	26.2	29.5	-3.3	Perpe
25	3.121M	25.9	+0.1	+0.1	+9.3	-12.8	+0.0	22.6	29.5	-6.9	Perpe
QP											
^	3.121M	31.5	+0.1	+0.1	+9.3	-12.8	+0.0	28.2	29.5	-1.3	Perpe
27	21.643M	23.6	+0.2	+0.3	+7.7	-12.8	+0.0	19.0	29.5	-10.5	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 10:26:10 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 319 Perpendicular
 Overhead Test Site 2 Position 1 Medium Lines only. Notches off. MODE 1/2. Formal Power

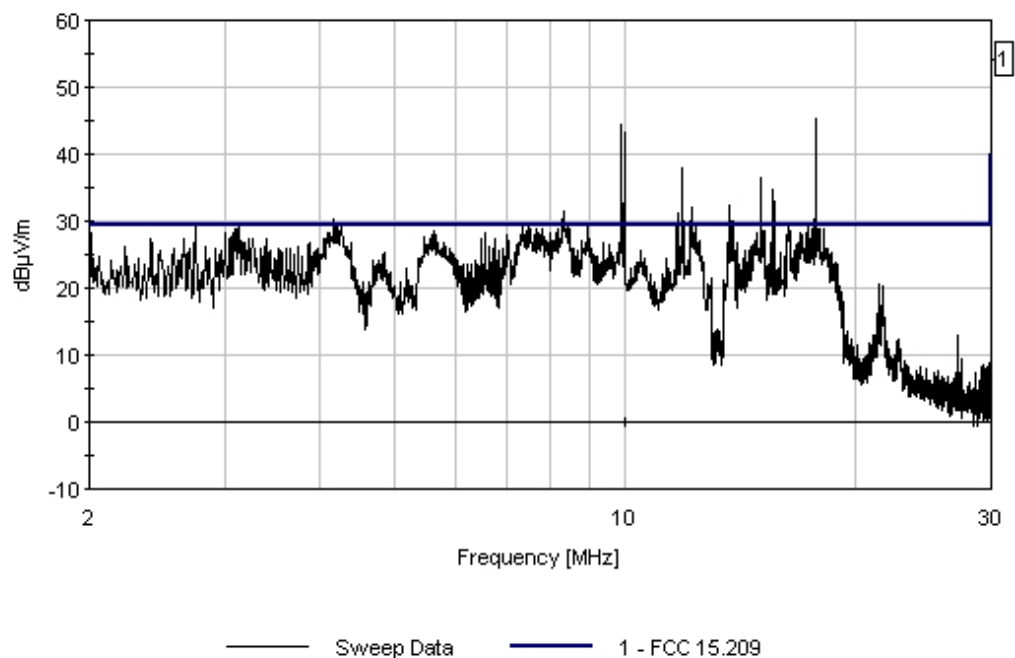

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 10:32:39
 Sequence#: 320
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly out from pole where box is installed. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	7.344M	27.6	+0.1	+0.2	+9.2	-12.8	+0.0	24.3	29.5	-5.2	Paral
2	15.000M	27.8	+0.2	+0.2	+8.6	-12.8	+0.0	24.0	29.5	-5.5	Paral
^	15.000M	30.4	+0.2	+0.2	+8.6	-12.8	+0.0	26.6	29.5	-2.9	Paral
4	16.880M	27.4	+0.2	+0.2	+8.4	-12.8	+0.0	23.4	29.5	-6.1	Paral
^	16.880M	30.7	+0.2	+0.2	+8.4	-12.8	+0.0	26.7	29.5	-2.8	Paral
6	16.341M	26.3	+0.2	+0.2	+8.5	-12.8	+0.0	22.4	29.5	-7.1	Paral
^	16.341M	30.2	+0.2	+0.2	+8.5	-12.8	+0.0	26.3	29.5	-3.2	Paral

8	6.466M	25.6	+0.1	+0.1	+9.2	-12.8	+0.0	22.2	29.5	-7.3	Paral
9	3.136M	24.5	+0.1	+0.1	+9.3	-12.8	+0.0	21.2	29.5	-8.3	Paral
10	12.501M	23.2	+0.2	+0.2	+8.8	-12.8	+0.0	19.6	29.5	-9.9	Paral
QP											
^	12.501M	30.2	+0.2	+0.2	+8.8	-12.8	+0.0	26.5	29.5	-3.0	Paral
12	18.155M	22.5	+0.2	+0.3	+8.3	-12.8	+0.0	18.5	29.5	-11.0	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 10:32:39 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 320 Parallel
Overhead Test Site 2 Position 1 Medium Lines only. Notches off. MODE 1/2. Formal Power

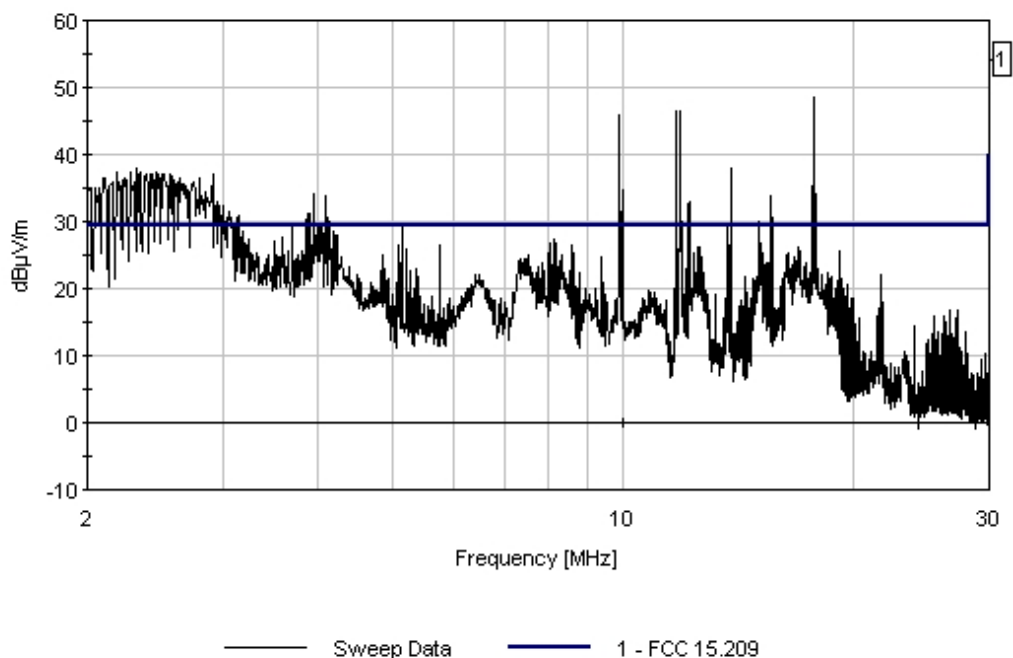

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 10:40:57
 Sequence#: 321
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	16.341M	33.0	+0.2	+0.2	+8.5	-12.8	+0.0	29.1	29.5	-0.4	Paral
QP											
^	16.341M	36.4	+0.2	+0.2	+8.5	-12.8	+0.0	32.5	29.5	+3.0	Paral
3	14.999M	32.4	+0.2	+0.2	+8.6	-12.8	+0.0	28.6	29.5	-0.9	Paral
QP											
^	14.999M	35.1	+0.2	+0.2	+8.6	-12.8	+0.0	31.3	29.5	+1.8	Paral
5	17.344M	30.9	+0.2	+0.3	+8.3	-12.8	+0.0	26.9	29.5	-2.6	Paral
QP											
^	17.344M	33.8	+0.2	+0.3	+8.3	-12.8	+0.0	29.8	29.5	+0.3	Paral

7	18.132M	30.5	+0.2	+0.3	+8.3	-12.8	+0.0	26.5	29.5	-3.0	Paral
QP											
^	18.132M	33.1	+0.2	+0.3	+8.3	-12.8	+0.0	29.1	29.5	-0.4	Paral
9	4.198M	28.2	+0.1	+0.2	+9.2	-12.8	+0.0	24.9	29.5	-4.6	Paral
10	7.366M	26.4	+0.1	+0.2	+9.2	-12.8	+0.0	23.1	29.5	-6.4	Paral
11	12.418M	25.7	+0.2	+0.2	+8.8	-12.8	+0.0	22.1	29.5	-7.4	Paral
12	3.133M	25.3	+0.1	+0.1	+9.3	-12.8	+0.0	22.0	29.5	-7.5	Paral
13	6.403M	24.5	+0.1	+0.1	+9.2	-12.8	+0.0	21.1	29.5	-8.4	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 10:40:57 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 321 Parallel
Overhead Test Site 2 Position 2 Medium Lines only. Notches off. MODE 1/2. Formal Power

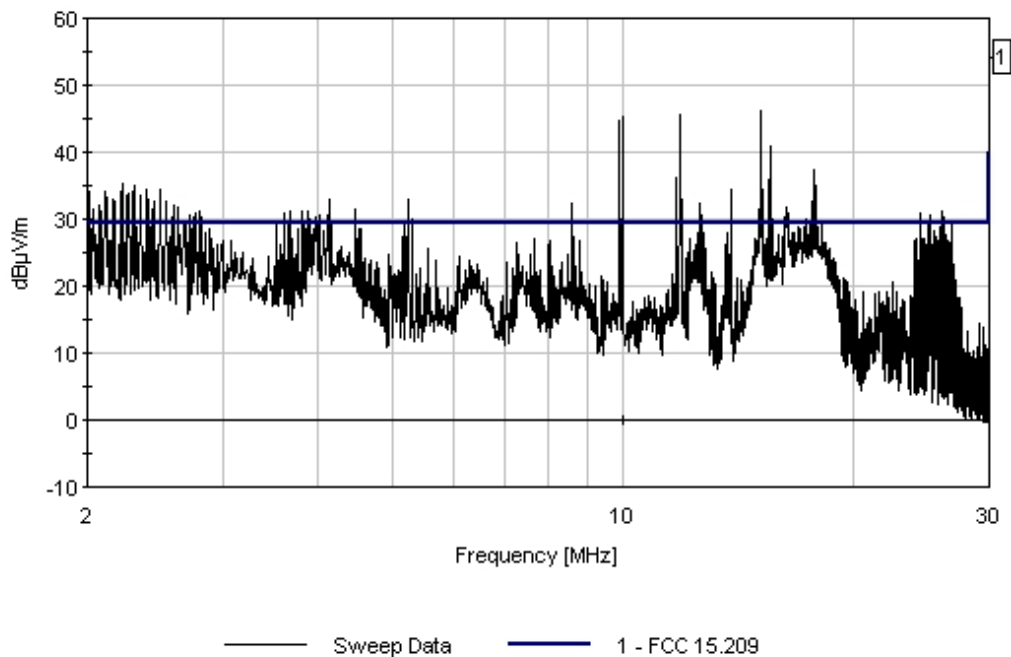

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 10:53:18
 Sequence#: 322
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	16.339M	33.3	+0.2	+0.2	+8.5	-12.8	+0.0	29.4	29.5	-0.1	Perpe
QP											
^	16.339M	36.2	+0.2	+0.2	+8.5	-12.8	+0.0	32.3	29.5	+2.8	Perpe
3	15.001M	32.4	+0.2	+0.2	+8.6	-12.8	+0.0	28.6	29.5	-0.9	Perpe
QP											
^	15.001M	35.9	+0.2	+0.2	+8.6	-12.8	+0.0	32.1	29.5	+2.6	Perpe
5	8.284M	30.0	+0.1	+0.2	+9.1	-12.8	+0.0	26.6	29.5	-2.9	Perpe
QP											
^	8.284M	32.8	+0.1	+0.2	+9.1	-12.8	+0.0	29.3	29.5	-0.2	Perpe

7	16.954M	29.5	+0.2	+0.2	+8.4	-12.8	+0.0	25.5	29.5	-4.0	Perpe
QP											
^	16.954M	33.1	+0.2	+0.2	+8.4	-12.8	+0.0	29.1	29.5	-0.4	Perpe
9	4.112M	26.7	+0.1	+0.2	+9.2	-12.8	+0.0	23.4	29.5	-6.1	Perpe
QP											
^	4.112M	30.6	+0.1	+0.2	+9.2	-12.8	+0.0	27.3	29.5	-2.2	Perpe
11	10.569M	26.8	+0.1	+0.2	+9.0	-12.8	+0.0	23.3	29.5	-6.2	Perpe
12	18.128M	27.2	+0.2	+0.3	+8.3	-12.8	+0.0	23.2	29.5	-6.3	Perpe
QP											
^	18.128M	30.5	+0.2	+0.3	+8.3	-12.8	+0.0	26.5	29.5	-3.0	Perpe
14	7.243M	26.4	+0.1	+0.2	+9.2	-12.8	+0.0	23.1	29.5	-6.4	Perpe
QP											
^	7.243M	30.3	+0.1	+0.2	+9.2	-12.8	+0.0	27.0	29.5	-2.5	Perpe
16	12.348M	26.4	+0.2	+0.2	+8.8	-12.8	+0.0	22.8	29.5	-6.7	Perpe
QP											
^	12.348M	29.5	+0.2	+0.2	+8.8	-12.8	+0.0	25.9	29.5	-3.6	Perpe
18	5.475M	26.0	+0.1	+0.1	+9.2	-12.8	+0.0	22.6	29.5	-6.9	Perpe
QP											
^	5.475M	29.9	+0.1	+0.1	+9.2	-12.8	+0.0	26.5	29.5	-3.0	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 10:53:18 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 322 Perpendicular
Overhead Test Site 2 Position 2 Medium Lines only. Notches off. MODE 1/2. Formal Power

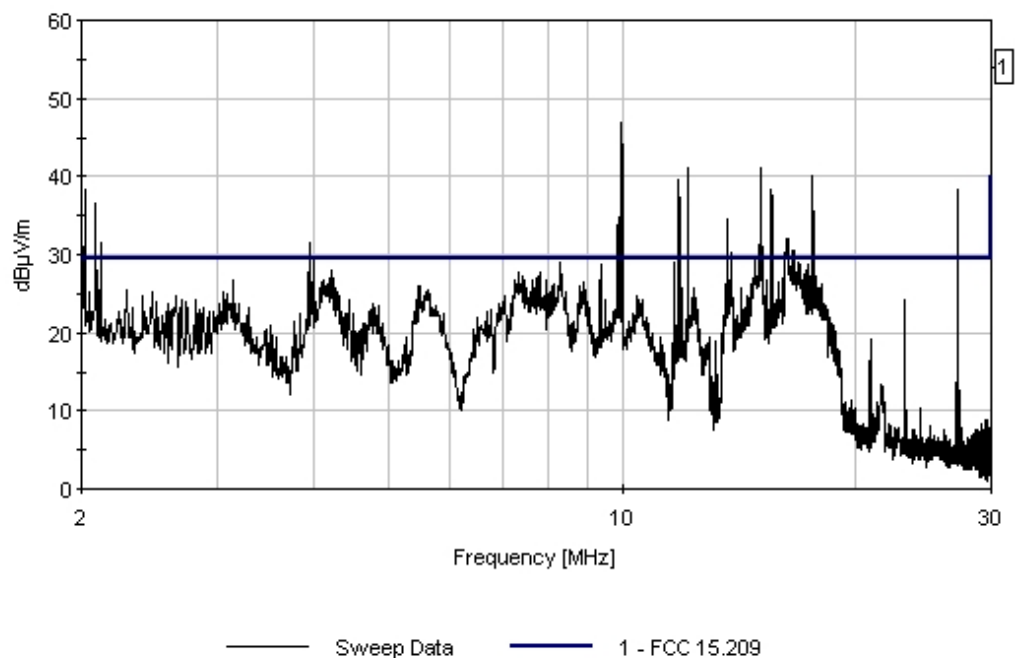

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 11:03:46
 Sequence#: 323
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.001M	29.9	+0.2	+0.2	+8.6	-12.8	+0.0	26.1	29.5	-3.4	Perpe
QP											
^	15.001M	34.4	+0.2	+0.2	+8.6	-12.8	+0.0	30.6	29.5	+1.1	Perpe
3	16.261M	29.1	+0.2	+0.2	+8.5	-12.8	+0.0	25.2	29.5	-4.3	Perpe
4	8.286M	27.0	+0.1	+0.2	+9.1	-12.8	+0.0	23.6	29.5	-5.9	Perpe
QP											
^	8.286M	30.1	+0.1	+0.2	+9.1	-12.8	+0.0	26.7	29.5	-2.8	Perpe
6	11.299M	27.1	+0.1	+0.2	+8.9	-12.8	+0.0	23.5	29.5	-6.0	Perpe

7	6.663M	26.7	+0.1	+0.2	+9.2	-12.8	+0.0	23.4	29.5	-6.1	Perpe
QP											
^	6.663M	30.2	+0.1	+0.2	+9.2	-12.8	+0.0	26.9	29.5	-2.6	Perpe
9	3.901M	26.2	+0.1	+0.2	+9.3	-12.8	+0.0	23.0	29.5	-6.5	Perpe
10	7.343M	26.1	+0.1	+0.2	+9.2	-12.8	+0.0	22.8	29.5	-6.7	Perpe
QP											
^	7.343M	29.6	+0.1	+0.2	+9.2	-12.8	+0.0	26.3	29.5	-3.2	Perpe
12	3.110M	25.7	+0.1	+0.1	+9.3	-12.8	+0.0	22.4	29.5	-7.1	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 11:03:46 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 323 Perpendicular
Overhead Test Site 2 Position 3 Medium Lines only. Notches off. MODE 1/2. Formal Power

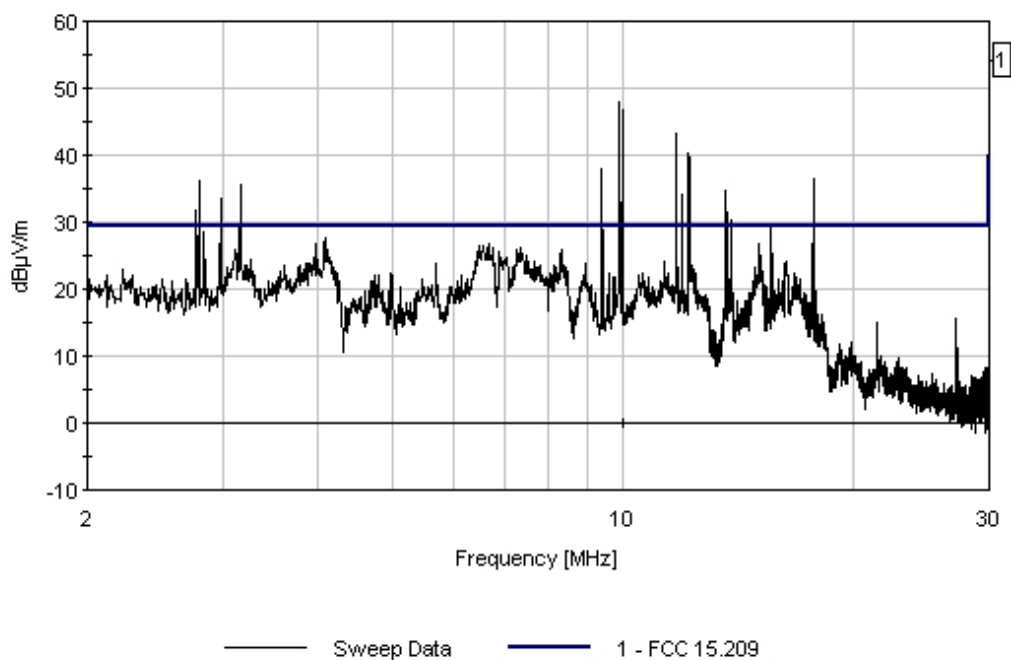

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 11:37:38
 Sequence#: 325
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.936M	32.3	+0.2	+0.2	+8.5	-12.8	+0.0	28.4	29.5	-1.1	Paral
QP											
^	15.936M	35.1	+0.2	+0.2	+8.5	-12.8	+0.0	31.2	29.5	+1.7	Paral
3	3.117M	30.9	+0.1	+0.1	+9.3	-12.8	+0.0	27.6	29.5	-1.9	Paral
QP											
^	3.117M	34.3	+0.1	+0.1	+9.3	-12.8	+0.0	31.0	29.5	+1.5	Paral
5	16.337M	31.4	+0.2	+0.2	+8.5	-12.8	+0.0	27.5	29.5	-2.0	Paral
QP											
^	16.337M	34.8	+0.2	+0.2	+8.5	-12.8	+0.0	30.9	29.5	+1.4	Paral

7	14.815M	30.7	+0.2	+0.2	+8.6	-12.8	+0.0	26.9	29.5	-2.6	Paral
QP											
^	14.815M	32.8	+0.2	+0.2	+8.6	-12.8	+0.0	29.0	29.5	-0.5	Paral
9	11.416M	28.7	+0.1	+0.2	+8.9	-12.8	+0.0	25.1	29.5	-4.4	Paral
QP											
^	11.416M	31.6	+0.1	+0.2	+8.9	-12.8	+0.0	27.9	29.5	-1.6	Paral
11	12.348M	28.6	+0.2	+0.2	+8.8	-12.8	+0.0	25.0	29.5	-4.5	Paral
QP											
^	12.348M	31.5	+0.2	+0.2	+8.8	-12.8	+0.0	27.9	29.5	-1.6	Paral
13	17.965M	27.7	+0.2	+0.3	+8.3	-12.8	+0.0	23.7	29.5	-5.8	Paral
14	7.336M	23.9	+0.1	+0.2	+9.2	-12.8	+0.0	20.6	29.5	-8.9	Paral
15	8.907M	23.8	+0.1	+0.2	+9.1	-12.8	+0.0	20.4	29.5	-9.1	Paral
QP											
^	8.907M	29.0	+0.1	+0.2	+9.1	-12.8	+0.0	25.6	29.5	-3.9	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 11:37:38 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 325 Parallel
Overhead Test Site 2 Position 3 Medium Lines only. Notches off. MODE 1/2. Formal Power

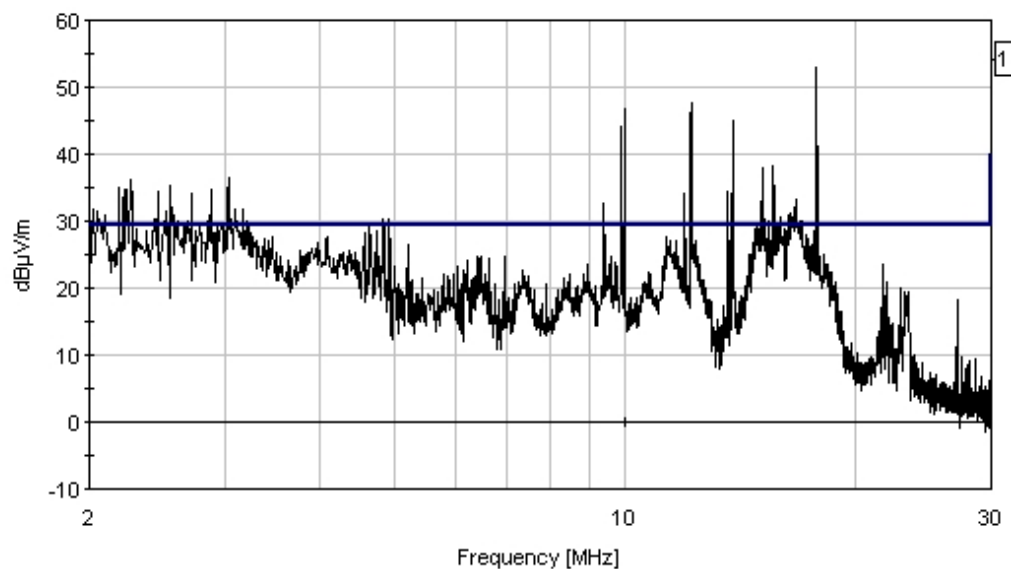

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 11:46:26
 Sequence#: 326
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.125M	31.1	+0.1	+0.1	+9.3	-12.8	+0.0	27.8	29.5	-1.7	Paral
QP											
^	3.125M	34.3	+0.1	+0.1	+9.3	-12.8	+0.0	31.0	29.5	+1.5	Paral
3	16.953M	30.1	+0.2	+0.2	+8.4	-12.8	+0.0	26.1	29.5	-3.4	Paral
QP											
^	16.953M	33.6	+0.2	+0.2	+8.4	-12.8	+0.0	29.6	29.5	+0.1	Paral
5	6.609M	28.6	+0.1	+0.2	+9.2	-12.8	+0.0	25.3	29.5	-4.2	Paral
6	11.413M	28.4	+0.1	+0.2	+8.9	-12.8	+0.0	24.8	29.5	-4.7	Paral
QP											
^	11.413M	31.8	+0.1	+0.2	+8.9	-12.8	+0.0	28.2	29.5	-1.3	Paral

8	8.287M	27.7	+0.1	+0.2	+9.1	-12.8	+0.0	24.3	29.5	-5.2	Paral
QP											
^	8.287M	30.7	+0.1	+0.2	+9.1	-12.8	+0.0	27.3	29.5	-2.2	Paral
10	14.843M	27.6	+0.2	+0.2	+8.6	-12.8	+0.0	23.8	29.5	-5.7	Paral
QP											
^	14.843M	30.0	+0.2	+0.2	+8.6	-12.8	+0.0	26.2	29.5	-3.3	Paral
12	18.335M	27.5	+0.2	+0.3	+8.3	-12.8	+0.0	23.5	29.5	-6.0	Paral
13	3.953M	26.4	+0.1	+0.2	+9.3	-12.8	+0.0	23.2	29.5	-6.3	Paral
QP											
^	3.953M	31.4	+0.1	+0.2	+9.3	-12.8	+0.0	28.2	29.5	-1.3	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 11:46:26 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 326 Parallel
Overhead Test Site 2 Position 4 Medium Lines only. Notches off. MODE 1/2. Formal Power

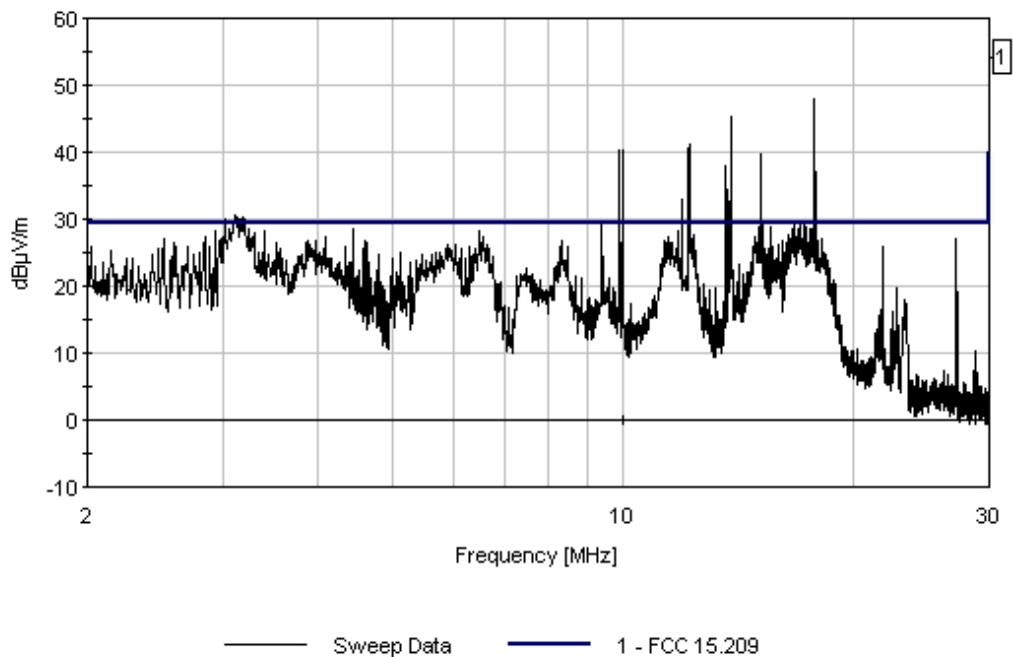

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 11:54:06
 Sequence#: 327
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	7.340M	32.7	+0.1	+0.2	+9.2	-12.8	+0.0	29.4	29.5	-0.1	Perpe
QP											
2	3.123M	28.7	+0.1	+0.1	+9.3	-12.8	+0.0	25.4	29.5	-4.1	Perpe
QP											
^	3.123M	32.6	+0.1	+0.1	+9.3	-12.8	+0.0	29.3	29.5	-0.2	Perpe
4	6.540M	28.1	+0.1	+0.2	+9.2	-12.8	+0.0	24.8	29.5	-4.7	Perpe
QP											
^	6.540M	31.9	+0.1	+0.2	+9.2	-12.8	+0.0	28.6	29.5	-0.9	Perpe
6	7.340M	26.6	+0.1	+0.2	+9.2	-12.8	+0.0	23.3	29.5	-6.2	Perpe
QP											
^	7.340M	29.8	+0.1	+0.2	+9.2	-12.8	+0.0	26.5	29.5	-3.0	Perpe

8	16.955M	26.3	+0.2	+0.2	+8.4	-12.8	+0.0	22.3	29.5	-7.2	Perpe
9	17.915M	24.7	+0.2	+0.3	+8.3	-12.8	+0.0	20.7	29.5	-8.8	Perpe
10	12.440M	24.2	+0.2	+0.2	+8.8	-12.8	+0.0	20.6	29.5	-8.9	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 11:54:06 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 327 Perpendicular
Overhead Test Site 2 Position 4 Medium Lines only. Notches off. MODE 1/2. Formal Power

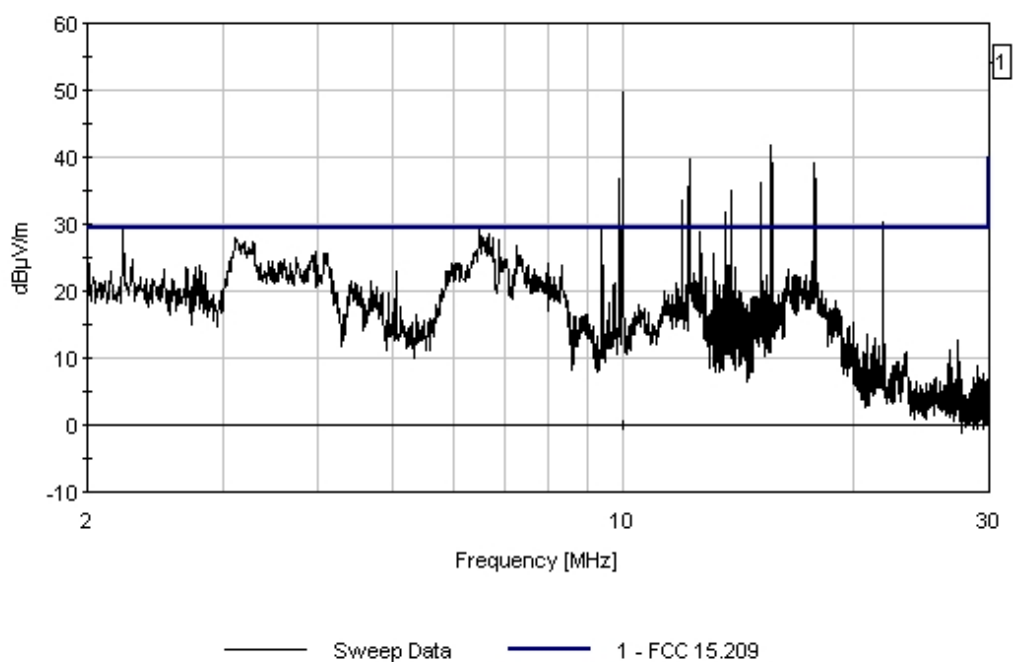

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 12:02:43
 Sequence#: 328
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.937M	30.6	+0.2	+0.2	+8.5	-12.8	+0.0	26.7	29.5	-2.8	Paral
QP											
^	15.937M	33.2	+0.2	+0.2	+8.5	-12.8	+0.0	29.3	29.5	-0.2	Paral
3	14.841M	30.4	+0.2	+0.2	+8.6	-12.8	+0.0	26.6	29.5	-2.9	Paral
QP											
^	14.841M	33.0	+0.2	+0.2	+8.6	-12.8	+0.0	29.2	29.5	-0.3	Paral
5	18.131M	30.0	+0.2	+0.3	+8.3	-12.8	+0.0	26.0	29.5	-3.5	Paral
QP											
^	18.131M	32.8	+0.2	+0.3	+8.3	-12.8	+0.0	28.8	29.5	-0.7	Paral

7	8.286M	29.4	+0.1	+0.2	+9.1	-12.8	+0.0	26.0	29.5	-3.5	Paral
QP											
^	8.286M	32.4	+0.1	+0.2	+9.1	-12.8	+0.0	29.0	29.5	-0.5	Paral
9	5.941M	28.6	+0.1	+0.1	+9.2	-12.8	+0.0	25.2	29.5	-4.3	Paral
10	3.133M	27.3	+0.1	+0.1	+9.3	-12.8	+0.0	24.0	29.5	-5.5	Paral
QP											
^	3.133M	31.1	+0.1	+0.1	+9.3	-12.8	+0.0	27.8	29.5	-1.7	Paral
12	12.321M	27.5	+0.2	+0.2	+8.8	-12.8	+0.0	23.9	29.5	-5.6	Paral
13	6.487M	27.0	+0.1	+0.2	+9.2	-12.8	+0.0	23.7	29.5	-5.8	Paral
QP											
^	6.487M	31.4	+0.1	+0.2	+9.2	-12.8	+0.0	28.1	29.5	-1.4	Paral
15	23.341M	17.4	+0.2	+0.3	+7.3	-12.8	+0.0	12.4	29.5	-17.1	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 12:02:43 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 328 Parallel
Overhead Test Site 2 Position 5 Medium Lines only. Notches off. MODE 1/2. Formal Power

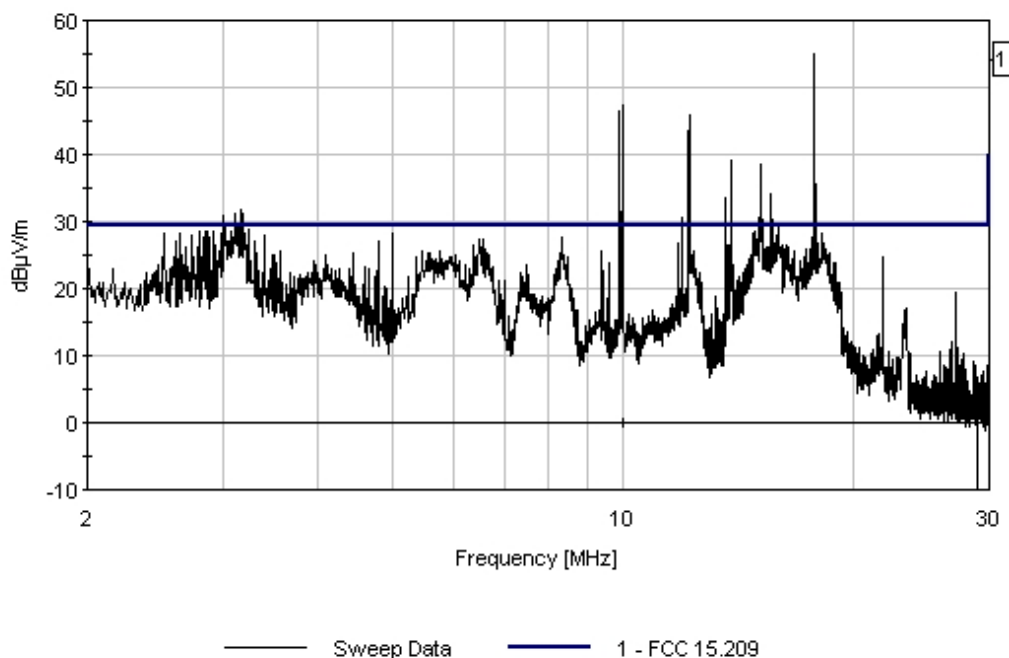

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 12:11:44
 Sequence#: 329
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	6.570M	28.4	+0.1	+0.2	+9.2	-12.8	+0.0	25.1	29.5	-4.4	Perpe
QP											
^	6.570M	31.2	+0.1	+0.2	+9.2	-12.8	+0.0	27.9	29.5	-1.6	Perpe
3	12.244M	28.5	+0.1	+0.2	+8.9	-12.8	+0.0	24.9	29.5	-4.6	Perpe
4	8.288M	27.8	+0.1	+0.2	+9.1	-12.8	+0.0	24.4	29.5	-5.1	Perpe
5	16.954M	27.0	+0.2	+0.2	+8.4	-12.8	+0.0	23.0	29.5	-6.5	Perpe

6	4.068M	26.2	+0.1	+0.2	+9.2	-12.8	+0.0	22.9	29.5	-6.6	Perpe
QP											
^	4.068M	29.7	+0.1	+0.2	+9.2	-12.8	+0.0	26.4	29.5	-3.1	Perpe
8	3.287M	26.1	+0.1	+0.1	+9.3	-12.8	+0.0	22.8	29.5	-6.7	Perpe
QP											
^	3.287M	29.8	+0.1	+0.1	+9.3	-12.8	+0.0	26.5	29.5	-3.0	Perpe
10	14.819M	24.2	+0.2	+0.2	+8.6	-12.8	+0.0	20.4	29.5	-9.1	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 12:11:44 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 329 Perpendicular
Overhead Test Site 2 Position 5 Medium Lines only. Notches off. MODE 1/2. Formal Power

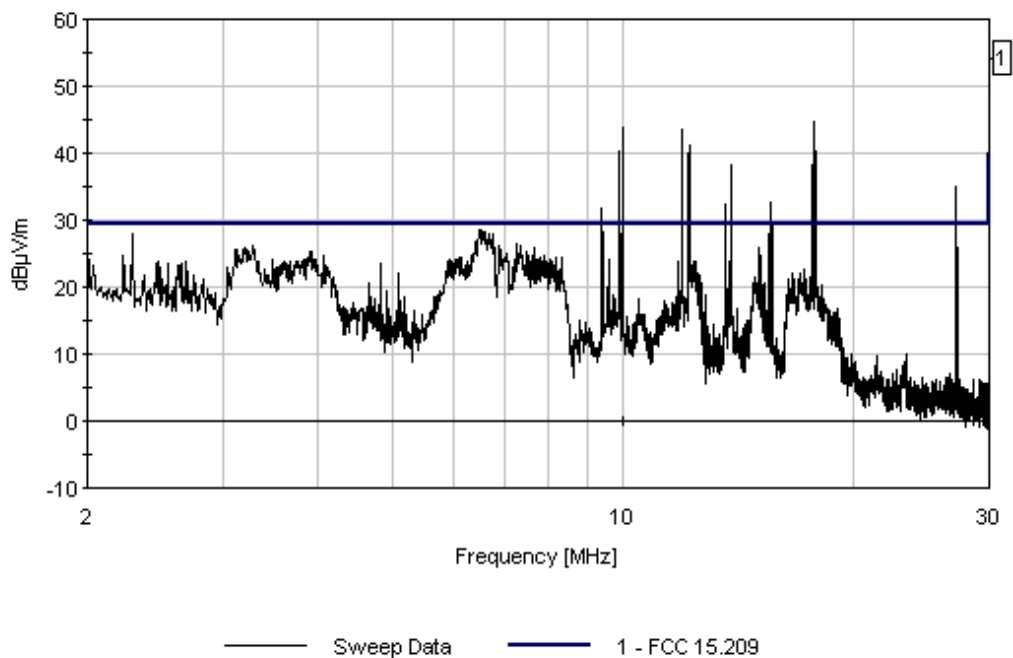

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 12:52:30
 Sequence#: 330
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.106M	27.0	+0.1	+0.1	+9.3	-12.8	+0.0	23.7	29.5	-5.8	Perpe
2	3.800M	26.2	+0.1	+0.2	+9.3	-12.8	+0.0	23.0	29.5	-6.5	Perpe
3	6.571M	25.0	+0.1	+0.2	+9.2	-12.8	+0.0	21.7	29.5	-7.8	Perpe
4	8.097M	24.5	+0.1	+0.2	+9.1	-12.8	+0.0	21.1	29.5	-8.4	Perpe
5	11.323M	23.8	+0.1	+0.2	+8.9	-12.8	+0.0	20.2	29.5	-9.3	Perpe
6	14.836M	21.9	+0.2	+0.2	+8.6	-12.8	+0.0	18.1	29.5	-11.4	Perpe

7	16.944M	21.2	+0.2	+0.2	+8.4	-12.8	+0.0	17.1	29.5	-12.4	Perpe
8	16.404M	20.8	+0.2	+0.2	+8.4	-12.8	+0.0	16.8	29.5	-12.7	Perpe
9	18.373M	20.7	+0.2	+0.3	+8.2	-12.8	+0.0	16.6	29.5	-12.9	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 12:52:30 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 330 Perpendicular
Overhead Test Site 2 Position 6 Medium Lines only. Notches off. MODE 1/2. Formal Power

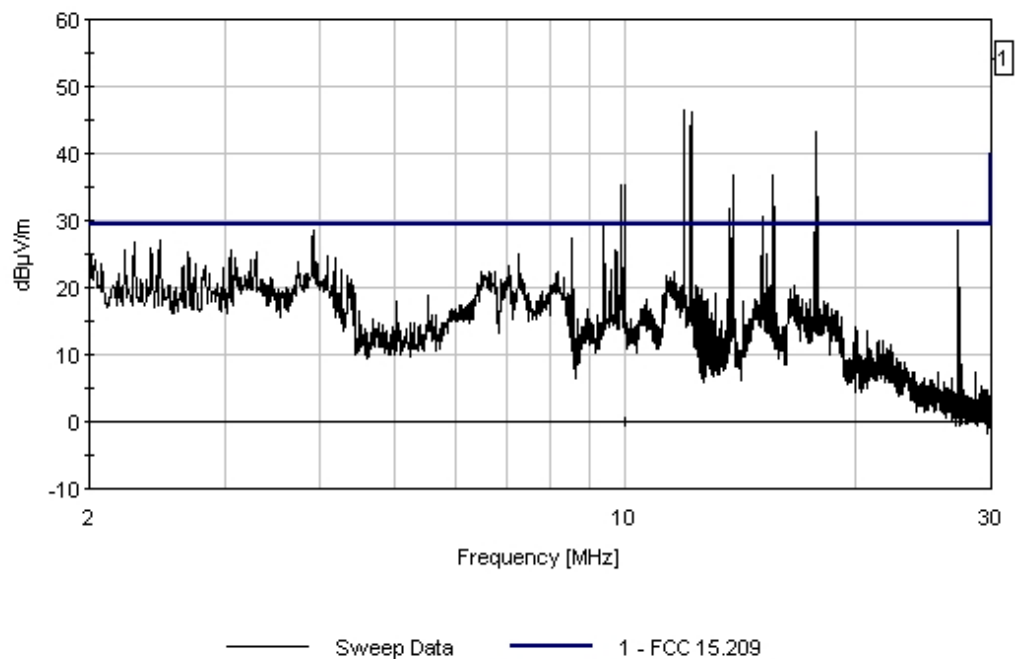

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 12:58:32
 Sequence#: 331
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	12.348M	29.4	+0.2	+0.2	+8.8	-12.8	+0.0	25.8	29.5	-3.7	Paral
QP											
^	12.348M	32.0	+0.2	+0.2	+8.8	-12.8	+0.0	28.4	29.5	-1.1	Paral
3	11.604M	27.8	+0.1	+0.2	+8.9	-12.8	+0.0	24.2	29.5	-5.3	Paral
4	3.099M	27.1	+0.1	+0.1	+9.3	-12.8	+0.0	23.8	29.5	-5.7	Paral
5	18.128M	27.7	+0.2	+0.3	+8.3	-12.8	+0.0	23.7	29.5	-5.8	Paral
QP											
^	18.128M	31.0	+0.2	+0.3	+8.3	-12.8	+0.0	27.0	29.5	-2.5	Paral

7	16.407M	27.0	+0.2	+0.2	+8.4	-12.8	+0.0	23.0	29.5	-6.5	Paral
QP											
^	16.407M	30.5	+0.2	+0.2	+8.4	-12.8	+0.0	26.5	29.5	-3.0	Paral
9	5.600M	25.7	+0.1	+0.1	+9.2	-12.8	+0.0	22.3	29.5	-7.2	Paral
10	14.857M	24.5	+0.2	+0.2	+8.6	-12.8	+0.0	20.7	29.5	-8.8	Paral
11	8.637M	23.7	+0.1	+0.2	+9.1	-12.8	+0.0	20.3	29.5	-9.2	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 12:58:32 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 331 Parallel
Overhead Test Site 2 Position 6 Medium Lines only. Notches off. MODE 1/2. Formal Power

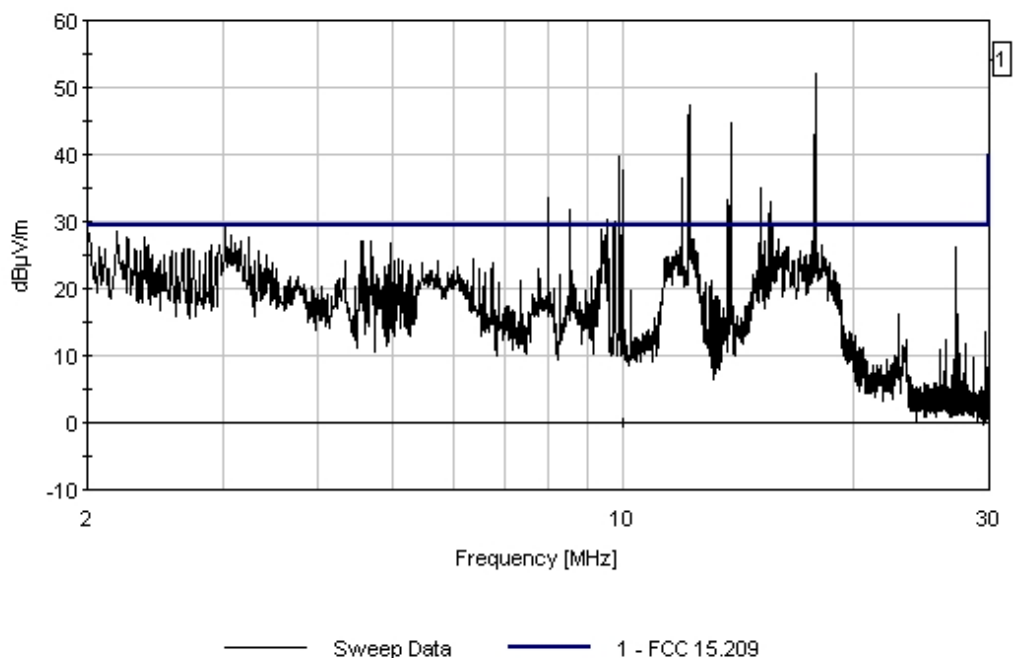

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:09:26
 Sequence#: 332
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	12.347M	28.2	+0.2	+0.2	+8.8	-12.8	+0.0	24.6	29.5	-4.9	Perpe
QP											
^	12.347M	31.4	+0.2	+0.2	+8.8	-12.8	+0.0	27.8	29.5	-1.7	Perpe
3	16.397M	27.2	+0.2	+0.2	+8.4	-12.8	+0.0	23.2	29.5	-6.3	Perpe
4	11.716M	26.7	+0.1	+0.2	+8.9	-12.8	+0.0	23.1	29.5	-6.4	Perpe
QP											
^	11.716M	29.5	+0.1	+0.2	+8.9	-12.8	+0.0	25.9	29.5	-3.6	Perpe
6	14.822M	26.6	+0.2	+0.2	+8.6	-12.8	+0.0	22.8	29.5	-6.7	Perpe
7	11.315M	26.2	+0.1	+0.2	+8.9	-12.8	+0.0	22.6	29.5	-6.9	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 13:09:26 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 332 Perpendicular
 Overhead Test Site 2 Position 7 Medium Lines only. Notches off. MODE 1/2. Formal Power

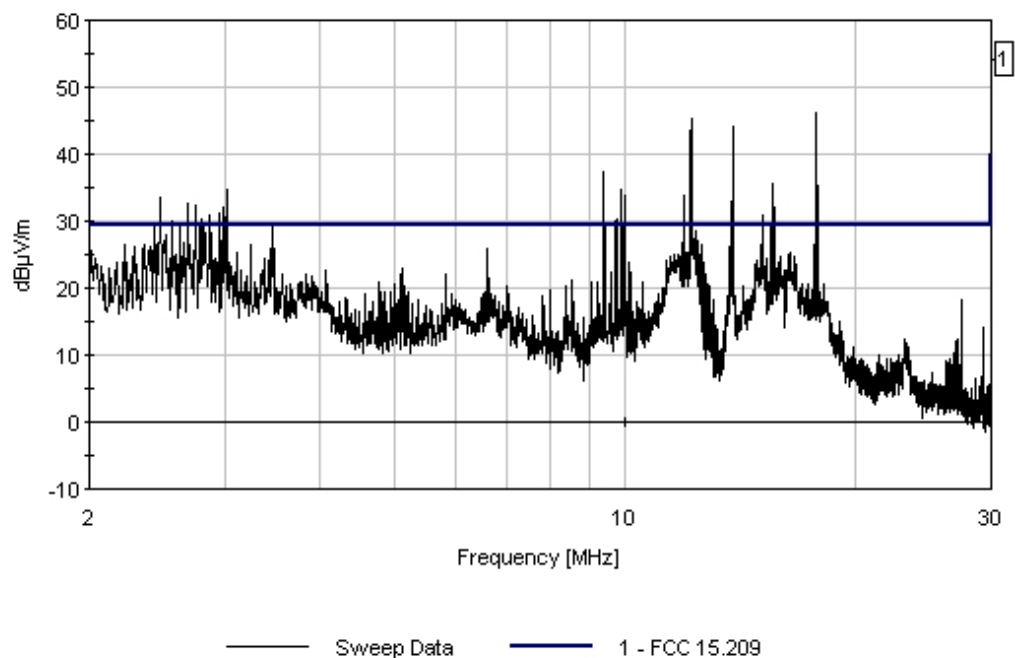

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:15:15
 Sequence#: 333
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	8.287M	28.5	+0.1	+0.2	+9.1	-12.8	+0.0	25.1	29.5	-4.4	Paral
2	15.939M	28.6	+0.2	+0.2	+8.5	-12.8	+0.0	24.7	29.5	-4.8	Paral
QP											
^	15.939M	31.7	+0.2	+0.2	+8.5	-12.8	+0.0	27.8	29.5	-1.7	Paral
4	16.407M	28.6	+0.2	+0.2	+8.4	-12.8	+0.0	24.6	29.5	-4.9	Paral
QP											
^	16.407M	32.4	+0.2	+0.2	+8.4	-12.8	+0.0	28.4	29.5	-1.1	Paral
6	4.258M	26.9	+0.1	+0.2	+9.2	-12.8	+0.0	23.6	29.5	-5.9	Paral

7	17.957M	27.3	+0.2	+0.3	+8.3	-12.8	+0.0	23.3	29.5	-6.2	Paral
8	3.110M	24.9	+0.1	+0.1	+9.3	-12.8	+0.0	21.6	29.5	-7.9	Paral
9	14.857M	23.1	+0.2	+0.2	+8.6	-12.8	+0.0	19.2	29.5	-10.3	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 13:15:15 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 333 Parallel
Overhead Test Site 2 Position 7 Medium Lines only. Notches off. MODE 1/2. Formal Power

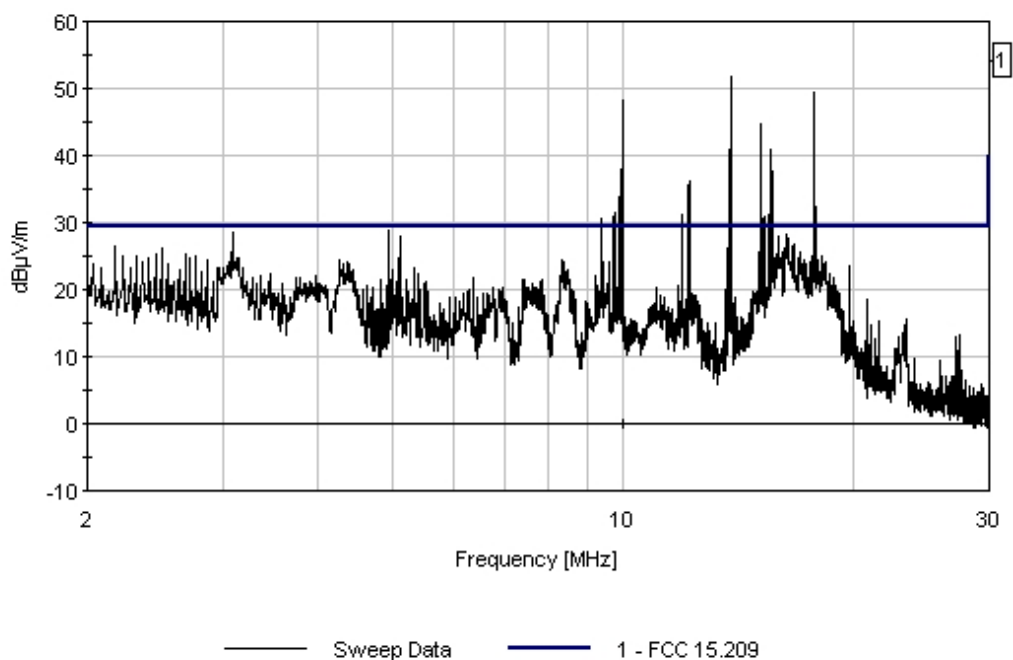

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:21:59
 Sequence#: 334
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	16.409M	29.0	+0.2	+0.2	+8.4	-12.8	+0.0	25.0	29.5	-4.5	Paral
QP											
^	16.409M	32.6	+0.2	+0.2	+8.4	-12.8	+0.0	28.6	29.5	-0.9	Paral
3	18.128M	28.9	+0.2	+0.3	+8.3	-12.8	+0.0	24.9	29.5	-4.6	Paral
QP											
^	18.128M	31.9	+0.2	+0.3	+8.3	-12.8	+0.0	27.9	29.5	-1.6	Paral
5	15.938M	28.5	+0.2	+0.2	+8.5	-12.8	+0.0	24.6	29.5	-4.9	Paral
QP											
^	15.938M	31.8	+0.2	+0.2	+8.5	-12.8	+0.0	27.9	29.5	-1.6	Paral

7	16.950M	28.1	+0.2	+0.2	+8.4	-12.8	+0.0	24.1	29.5	-5.4	Paral
QP											
^	16.950M	31.1	+0.2	+0.2	+8.4	-12.8	+0.0	27.1	29.5	-2.4	Paral
9	12.346M	27.6	+0.2	+0.2	+8.8	-12.8	+0.0	24.0	29.5	-5.5	Paral
10	4.363M	27.1	+0.1	+0.2	+9.2	-12.8	+0.0	23.8	29.5	-5.7	Paral
11	7.580M	23.2	+0.1	+0.2	+9.1	-12.8	+0.0	19.8	29.5	-9.7	Paral
12	5.930M	23.0	+0.1	+0.1	+9.2	-12.8	+0.0	19.6	29.5	-9.9	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 13:21:59 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 334 Parallel
Overhead Test Site 2 Position 8 Medium Lines only. Notches off. MODE 1/2. Formal Power

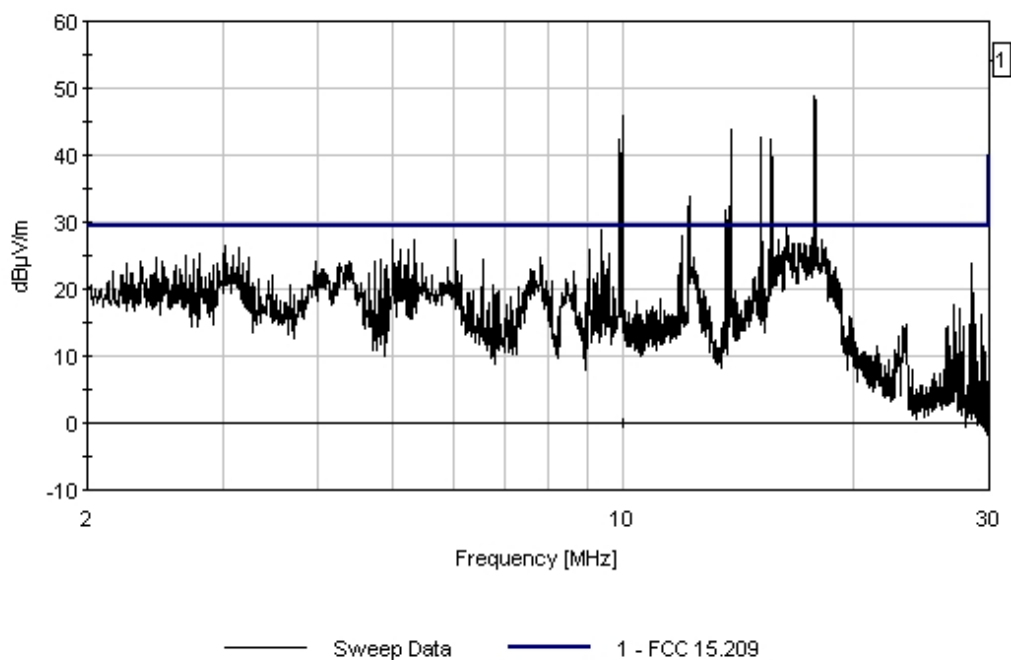

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:26:44
 Sequence#: 335
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	12.444M	25.3	+0.2	+0.2	+8.8	-12.8	+0.0	21.7	29.5	-7.8	Perpe
2	11.431M	24.5	+0.1	+0.2	+8.9	-12.8	+0.0	20.9	29.5	-8.6	Perpe
3	8.420M	21.8	+0.1	+0.2	+9.1	-12.8	+0.0	18.4	29.5	-11.1	Perpe
4	4.400M	20.3	+0.1	+0.2	+9.2	-12.8	+0.0	17.0	29.5	-12.5	Perpe
5	17.199M	19.7	+0.2	+0.2	+8.4	-12.8	+0.0	15.7	29.5	-13.8	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 13:26:44 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 335 Perpendicular
 Overhead Test Site 2 Position 8 Medium Lines only. Notches off. MODE 1/2. Formal Power

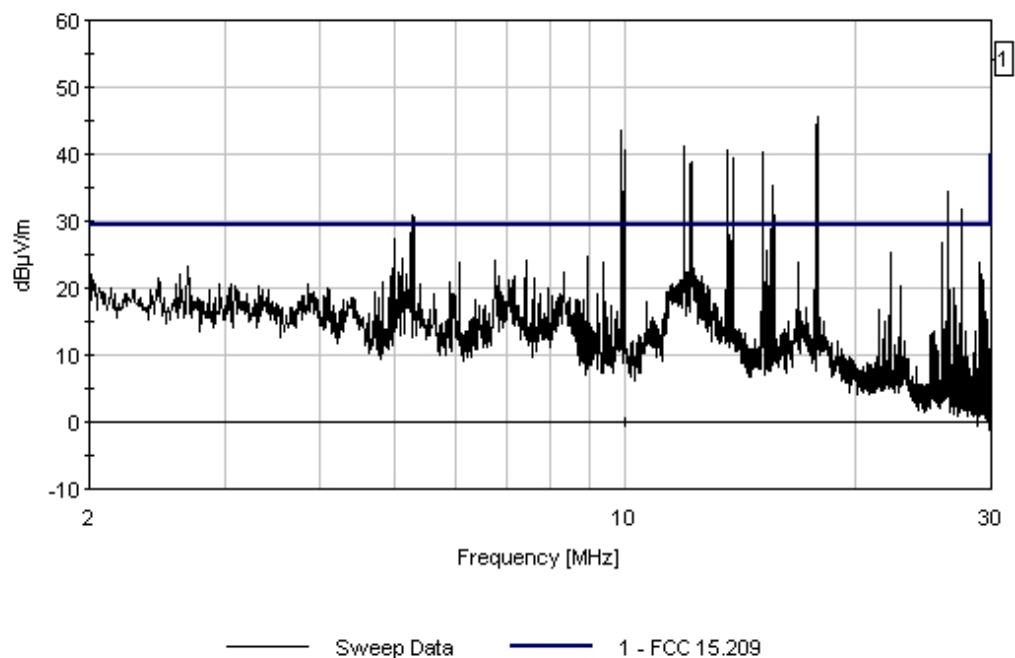

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:33:19
 Sequence#: 336
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	4.078M	27.3	+0.1	+0.2	+9.2	-12.8	+0.0	24.0	29.5	-5.5	Paral
2	7.805M	25.8	+0.1	+0.2	+9.1	-12.8	+0.0	22.4	29.5	-7.1	Paral
3	18.279M	25.2	+0.2	+0.3	+8.3	-12.8	+0.0	21.2	29.5	-8.3	Paral
4	6.166M	23.9	+0.1	+0.1	+9.2	-12.8	+0.0	20.5	29.5	-9.0	Paral
5	17.038M	24.3	+0.2	+0.2	+8.4	-12.8	+0.0	20.3	29.5	-9.2	Paral
6	14.855M	22.4	+0.2	+0.2	+8.6	-12.8	+0.0	18.6	29.5	-10.9	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 13:33:19 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 336 Parallel
 Overhead Test Site 2 Position 9 Medium Lines only. Notches off. MODE 1/2. Formal Power

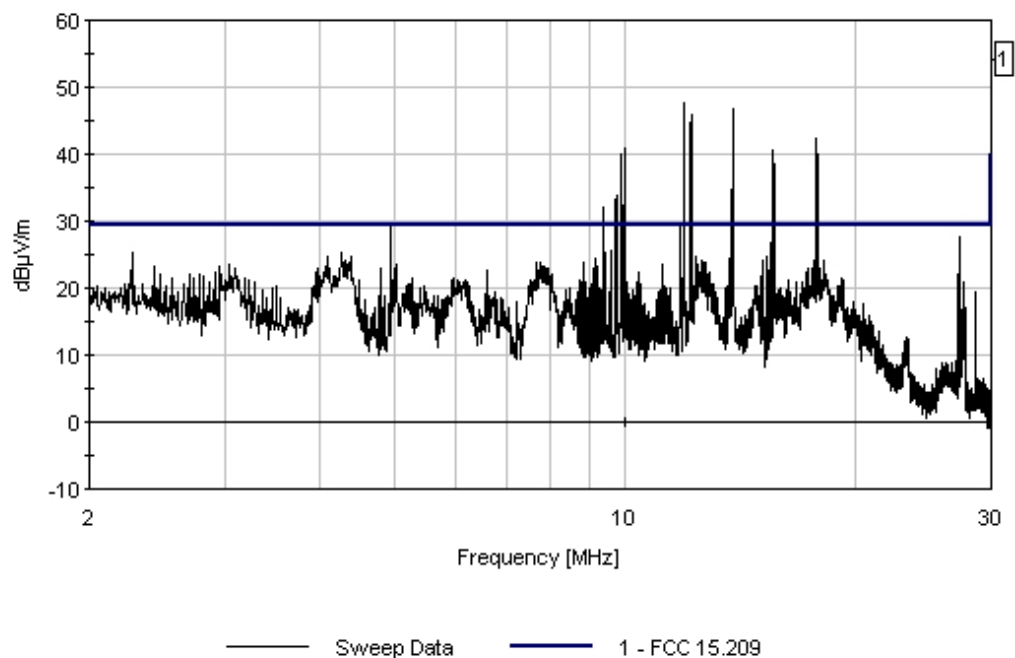

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:36:41
 Sequence#: 337
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	4.378M	21.9	+0.1	+0.2	+9.2	-12.8	+0.0	18.6	29.5	-10.9	Perpe
2	17.071M	21.9	+0.2	+0.2	+8.4	-12.8	+0.0	17.9	29.5	-11.6	Perpe
3	14.836M	21.6	+0.2	+0.2	+8.6	-12.8	+0.0	17.8	29.5	-11.7	Perpe
4	14.458M	21.6	+0.2	+0.2	+8.6	-12.8	+0.0	17.8	29.5	-11.7	Perpe
5	7.588M	20.6	+0.1	+0.2	+9.1	-12.8	+0.0	17.2	29.5	-12.3	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 13:36:41 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 337 Perpendicular
Overhead Test Site 2 Position 9 Medium Lines only. Notches off. MODE 1/2. Formal Power

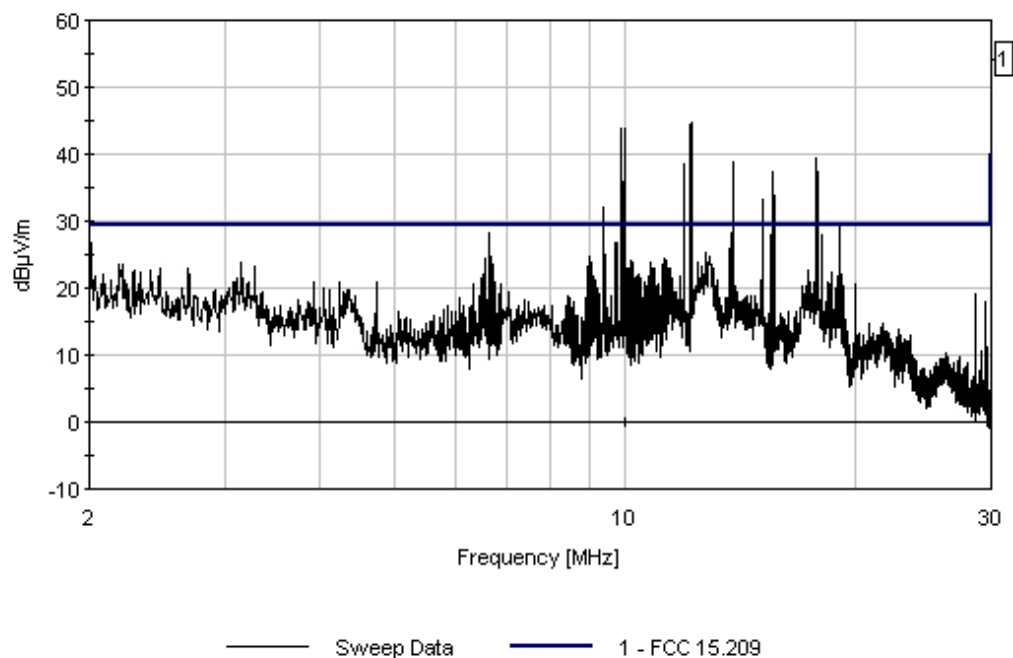

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:43:55
 Sequence#: 338
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	18.130M	27.6	+0.2	+0.3	+8.3	-12.8	+0.0	23.6	29.5	-5.9	Paral
2	8.450M	26.0	+0.1	+0.2	+9.1	-12.8	+0.0	22.6	29.5	-6.9	Paral
3	16.570M	26.5	+0.2	+0.2	+8.4	-12.8	+0.0	22.5	29.5	-7.0	Paral
4	17.045M	26.1	+0.2	+0.2	+8.4	-12.8	+0.0	22.1	29.5	-7.4	Paral
5	6.170M	25.1	+0.1	+0.1	+9.2	-12.8	+0.0	21.7	29.5	-7.8	Paral
6	4.375M	25.0	+0.1	+0.2	+9.2	-12.8	+0.0	21.7	29.5	-7.8	Paral

7	3.295M	25.0	+0.1	+0.1	+9.3	-12.8	+0.0	21.7	29.5	-7.8	Paral
8	15.935M	24.1	+0.2	+0.2	+8.5	-12.8	+0.0	20.1	29.5	-9.4	Paral
9	11.180M	20.2	+0.1	+0.2	+9.0	-12.8	+0.0	16.7	29.5	-12.8	Paral
10	14.785M	20.4	+0.2	+0.2	+8.6	-12.8	+0.0	16.6	29.5	-12.9	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 13:43:55 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 338 Parallel
Overhead Test Site 2 Position 10 Medium Lines only. Notches off. MODE 1/2. Formal Power

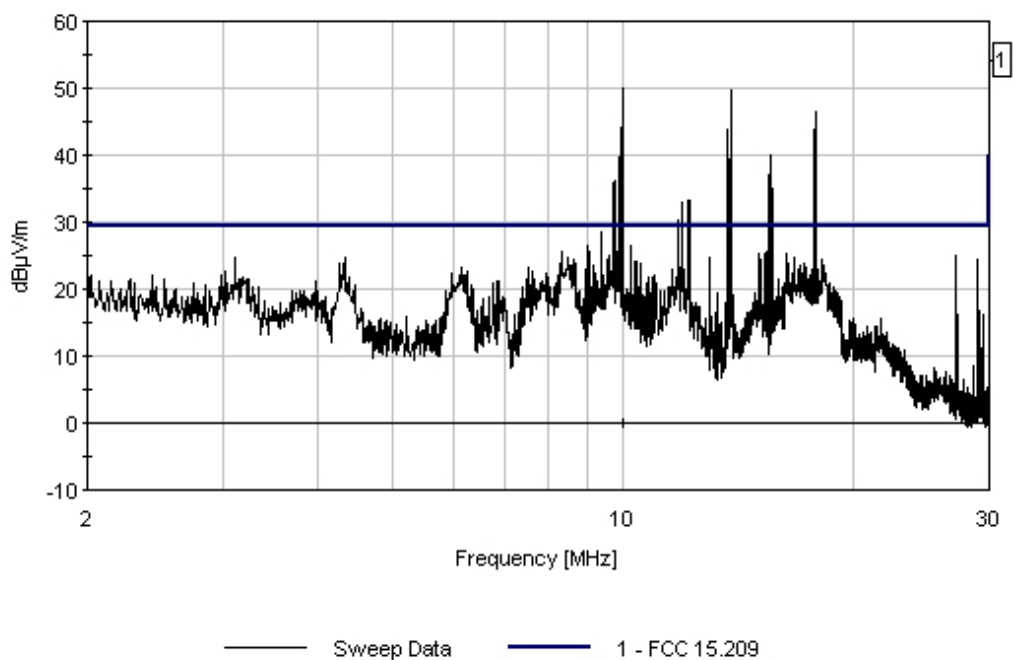

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:47:05
 Sequence#: 339
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	20.745M	27.6	+0.2	+0.3	+7.9	-12.8	+0.0	23.2	29.5	-6.3	Perpe
2	4.035M	23.8	+0.1	+0.2	+9.3	-12.8	+0.0	20.6	29.5	-8.9	Perpe
3	16.245M	23.2	+0.2	+0.2	+8.5	-12.8	+0.0	19.3	29.5	-10.2	Perpe
4	16.935M	23.3	+0.2	+0.2	+8.4	-12.8	+0.0	19.3	29.5	-10.2	Perpe
5	19.815M	22.3	+0.2	+0.3	+8.1	-12.8	+0.0	18.1	29.5	-11.4	Perpe
6	18.405M	20.6	+0.2	+0.3	+8.2	-12.8	+0.0	16.5	29.5	-13.0	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 13:47:05 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 339 Perpendicular
 Overhead Test Site 2 Position 10 Medium Lines only, Notches off, MODE 1/2, Formal Power

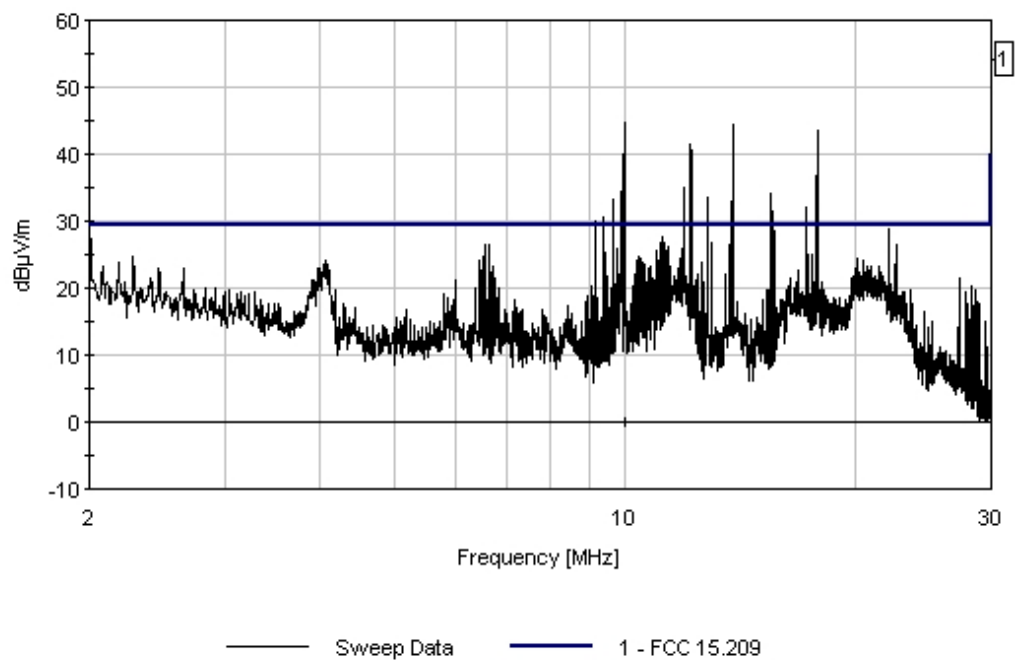

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 13:58:31
 Sequence#: 340
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.915M	24.7	+0.1	+0.2	+9.3	-12.8	+0.0	21.5	29.5	-8.0	Perpe
2	8.335M	22.3	+0.1	+0.2	+9.1	-12.8	+0.0	18.8	29.5	-10.7	Perpe
3	19.930M	19.7	+0.2	+0.3	+8.1	-12.8	+0.0	15.4	29.5	-14.1	Perpe
4	11.212M	17.3	+0.1	+0.2	+9.0	-12.8	+0.0	13.8	29.5	-15.7	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 13:58:31 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 340 Perpendicular
Overhead Test Site 2 Position 11 Medium Lines only, Notches off, MODE 1/2, Formal Power

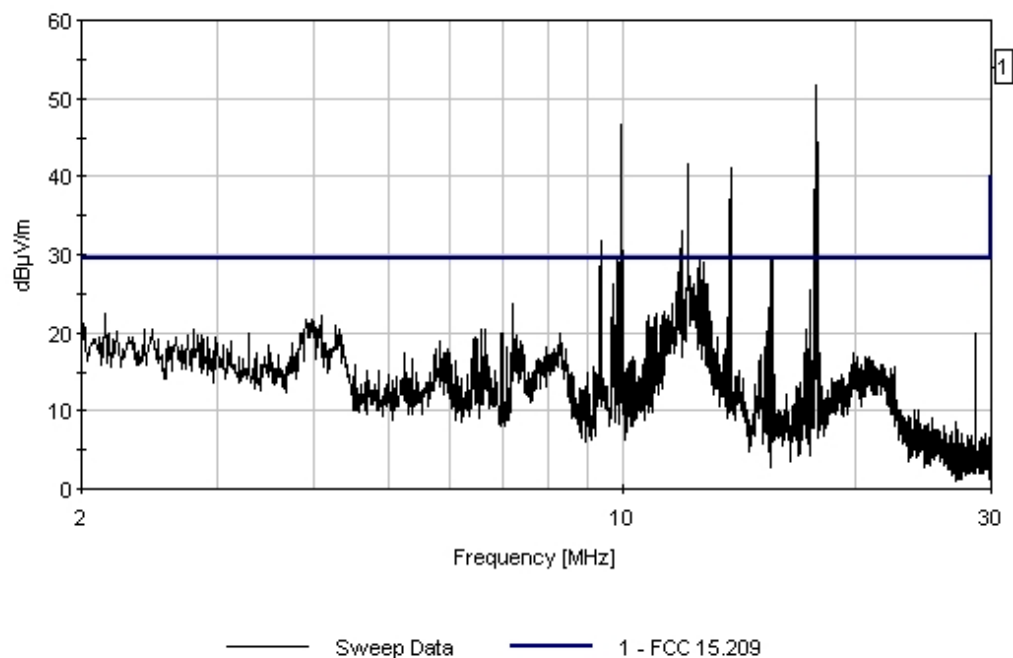

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:03:46
 Sequence#: 341
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.117M	27.3	+0.2	+0.2	+8.6	-12.8	+0.0	23.5	29.5	-6.0	Paral
2	16.400M	26.8	+0.2	+0.2	+8.4	-12.8	+0.0	22.8	29.5	-6.7	Paral
3	17.213M	26.7	+0.2	+0.2	+8.4	-12.8	+0.0	22.7	29.5	-6.8	Paral
4	4.100M	25.8	+0.1	+0.2	+9.2	-12.8	+0.0	22.5	29.5	-7.0	Paral
5	15.802M	26.1	+0.2	+0.2	+8.5	-12.8	+0.0	22.2	29.5	-7.3	Paral
6	18.284M	25.3	+0.2	+0.3	+8.3	-12.8	+0.0	21.3	29.5	-8.2	Paral

7	15.940M	25.0	+0.2	+0.2	+8.5	-12.8	+0.0	21.1	29.5	-8.4	Paral
8	14.795M	24.9	+0.2	+0.2	+8.6	-12.8	+0.0	21.1	29.5	-8.4	Paral
9	7.760M	24.0	+0.1	+0.2	+9.1	-12.8	+0.0	20.6	29.5	-8.9	Paral
10	18.905M	24.6	+0.2	+0.3	+8.2	-12.8	+0.0	20.5	29.5	-9.0	Paral
11	17.502M	24.0	+0.2	+0.3	+8.3	-12.8	+0.0	20.0	29.5	-9.5	Paral
12	22.708M	15.4	+0.2	+0.3	+7.4	-12.8	+0.0	10.5	29.5	-19.0	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 14:03:46 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 341 Parallel
Overhead Test Site 2 Position 11 Medium Lines only. Notches off. MODE 1/2. Formal Power

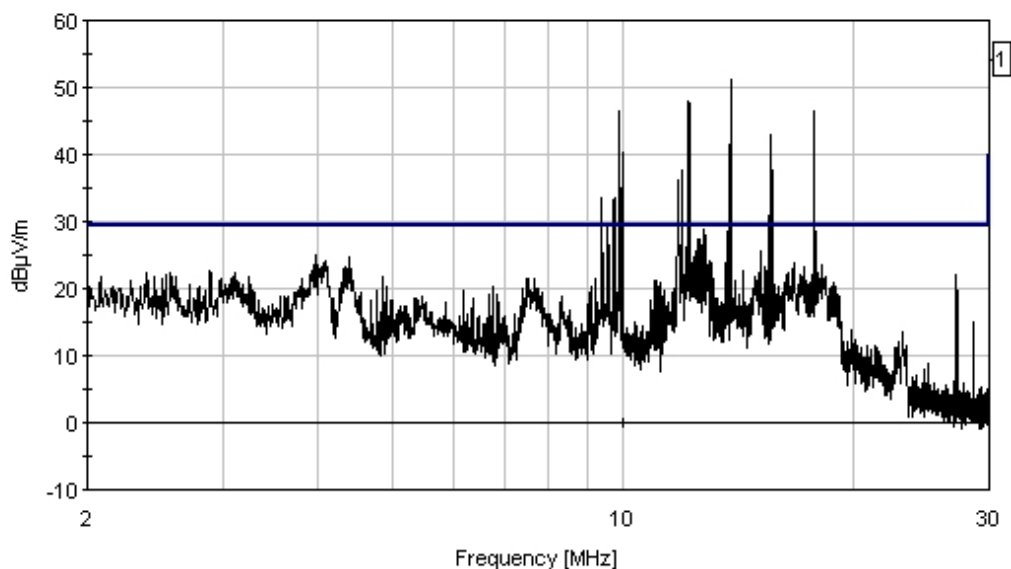

— Sweep Data — 1 - FCC 15.209

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:10:37
 Sequence#: 342
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	17.220M	27.8	+0.2	+0.2	+8.4	-12.8	+0.0	23.8	29.5	-5.7	Paral
2	4.065M	26.3	+0.1	+0.2	+9.2	-12.8	+0.0	23.0	29.5	-6.5	Paral
3	8.295M	26.2	+0.1	+0.2	+9.1	-12.8	+0.0	22.8	29.5	-6.7	Paral
4	16.270M	26.0	+0.2	+0.2	+8.5	-12.8	+0.0	22.1	29.5	-7.4	Paral
5	18.265M	24.3	+0.2	+0.3	+8.3	-12.8	+0.0	20.3	29.5	-9.2	Paral

6	6.635M	22.9	+0.1	+0.2	+9.2	-12.8	+0.0	19.6	29.5	-9.9	Paral
7	11.585M	21.9	+0.1	+0.2	+8.9	-12.8	+0.0	18.3	29.5	-11.2	Paral
8	23.075M	19.4	+0.2	+0.3	+7.3	-12.8	+0.0	14.4	29.5	-15.1	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 14:10:37 Corinex W/O#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 342 Parallel
Overhead Test Site 2 Position 12 Medium Lines only. Notches off. MODE 1/2. Formal Power

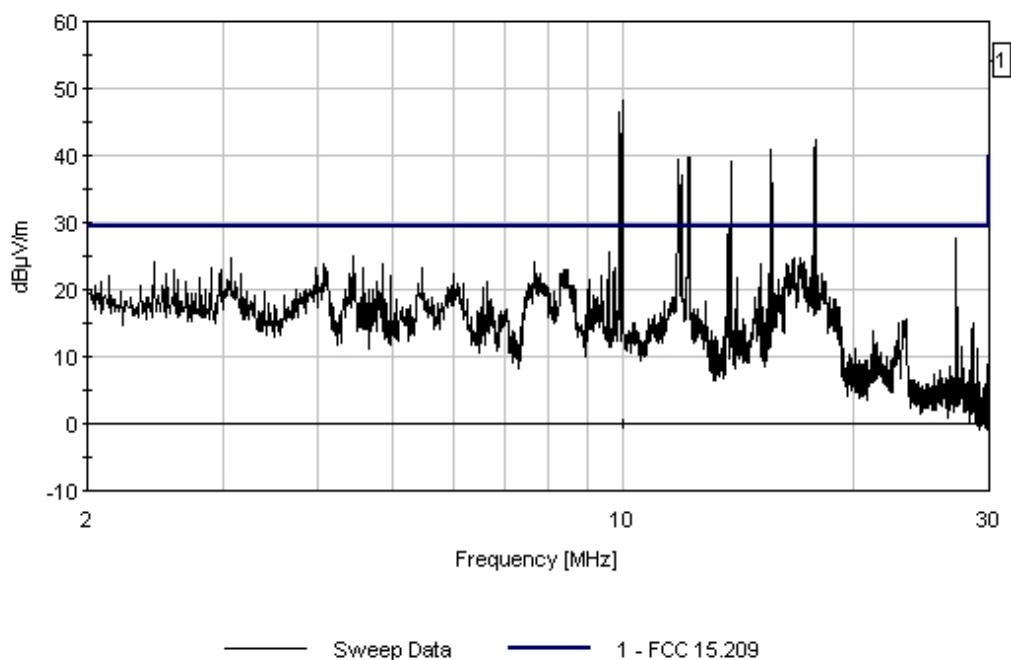

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:13:31
 Sequence#: 343
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	4.260M	26.4	+0.1	+0.2	+9.2	-12.8	+0.0	23.1	29.5	-6.4	Perpe
2	16.720M	23.1	+0.2	+0.2	+8.4	-12.8	+0.0	19.1	29.5	-10.4	Perpe
3	8.060M	22.0	+0.1	+0.2	+9.1	-12.8	+0.0	18.6	29.5	-10.9	Perpe
4	12.460M	21.0	+0.2	+0.2	+8.8	-12.8	+0.0	17.4	29.5	-12.1	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 14:13:31 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 343 Perpendicular
 Overhead Test Site 2 Position 12 Medium Lines only, Notches off, MODE 1/2, Formal Power

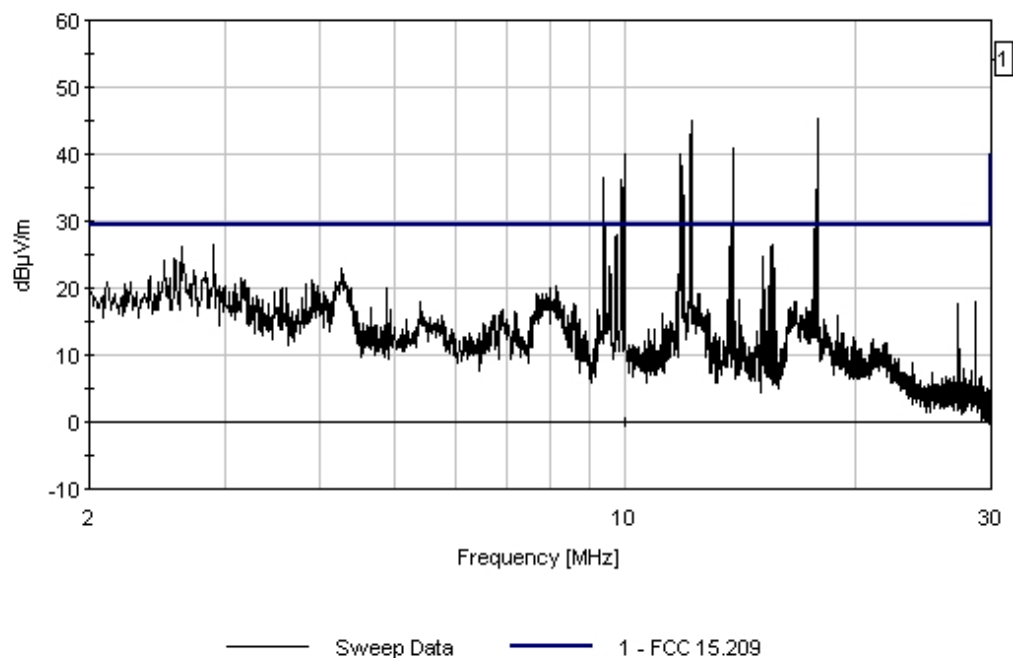

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:44:23
 Sequence#: 366
 Tested By: C. Nicklas

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly out from pole where box is installed. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	14.860M	28.4	+0.2	+0.2	+8.6	-12.8	+0.0	24.6	29.5	-4.9	Paral
2	17.350M	26.4	+0.2	+0.3	+8.3	-12.8	+0.0	22.4	29.5	-7.1	Paral
3	18.135M	25.9	+0.2	+0.3	+8.3	-12.8	+0.0	21.9	29.5	-7.6	Paral
4	28.405M	24.8	+0.3	+0.3	+5.6	-12.8	+0.0	18.2	29.5	-11.3	Paral
5	20.995M	20.2	+0.2	+0.3	+7.8	-12.8	+0.0	15.7	29.5	-13.8	Paral
6	27.690M	20.9	+0.3	+0.3	+5.8	-12.8	+0.0	14.5	29.5	-15.0	Paral
7	26.190M	20.2	+0.2	+0.3	+6.4	-12.8	+0.0	14.3	29.5	-15.2	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 16:44:23 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 366 Parallel
 Overhead Test Site 2 Position 1 Medium Lines only. Notches off. MODE 2/3. Formal Power

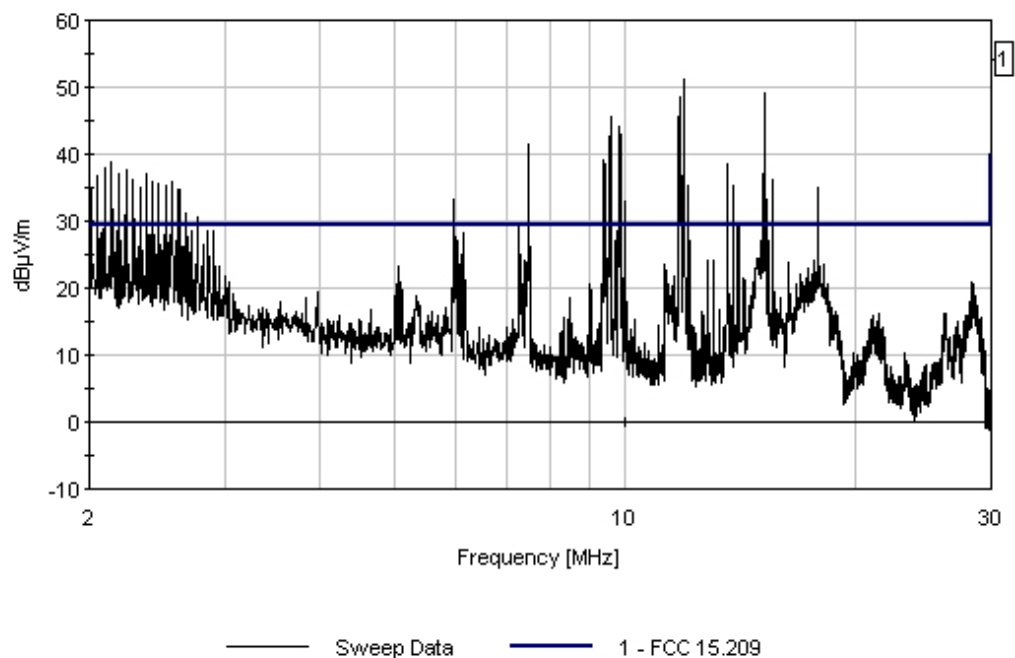

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:49:40
 Sequence#: 367
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly out from pole where box is installed. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	13.750M	32.1	+0.2	+0.2	+8.7	-12.8	+0.0	28.4	29.5	-1.1	Perpe
QP											
^	13.750M	35.4	+0.2	+0.2	+8.7	-12.8	+0.0	31.7	29.5	+2.2	Perpe
3	18.128M	31.3	+0.2	+0.3	+8.3	-12.8	+0.0	27.3	29.5	-2.2	Perpe
QP											
^	18.128M	34.3	+0.2	+0.3	+8.3	-12.8	+0.0	30.3	29.5	+0.8	Perpe
5	14.790M	30.8	+0.2	+0.2	+8.6	-12.8	+0.0	27.0	29.5	-2.5	Perpe
QP											
^	14.790M	33.7	+0.2	+0.2	+8.6	-12.8	+0.0	29.9	29.5	+0.4	Perpe

7	17.501M	29.0	+0.2	+0.3	+8.3	-12.8	+0.0	25.0	29.5	-4.5	Perpe
QP											
^	17.501M	32.2	+0.2	+0.3	+8.3	-12.8	+0.0	28.2	29.5	-1.3	Perpe
9	18.601M	28.3	+0.2	+0.3	+8.2	-12.8	+0.0	24.2	29.5	-5.3	Perpe
QP											
^	18.601M	30.9	+0.2	+0.3	+8.2	-12.8	+0.0	26.8	29.5	-2.7	Perpe
11	16.952M	28.0	+0.2	+0.2	+8.4	-12.8	+0.0	24.0	29.5	-5.5	Perpe
QP											
^	16.952M	31.3	+0.2	+0.2	+8.4	-12.8	+0.0	27.3	29.5	-2.2	Perpe
13	28.446M	27.8	+0.3	+0.3	+5.6	-12.8	+0.0	21.2	29.5	-8.3	Perpe
14	24.691M	24.9	+0.2	+0.3	+7.0	-12.8	+0.0	19.6	29.5	-9.9	Perpe
15	21.391M	23.6	+0.2	+0.3	+7.7	-12.8	+0.0	19.0	29.5	-10.5	Perpe
16	27.586M	24.7	+0.3	+0.3	+5.9	-12.8	+0.0	18.4	29.5	-11.1	Perpe
17	26.041M	22.7	+0.2	+0.3	+6.5	-12.8	+0.0	16.9	29.5	-12.6	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 16:49:40 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 367 Perpendicular
Overhead Test Site 2 Position 1 Medium Lines only. Notches off. MODE 2/3. Formal Power

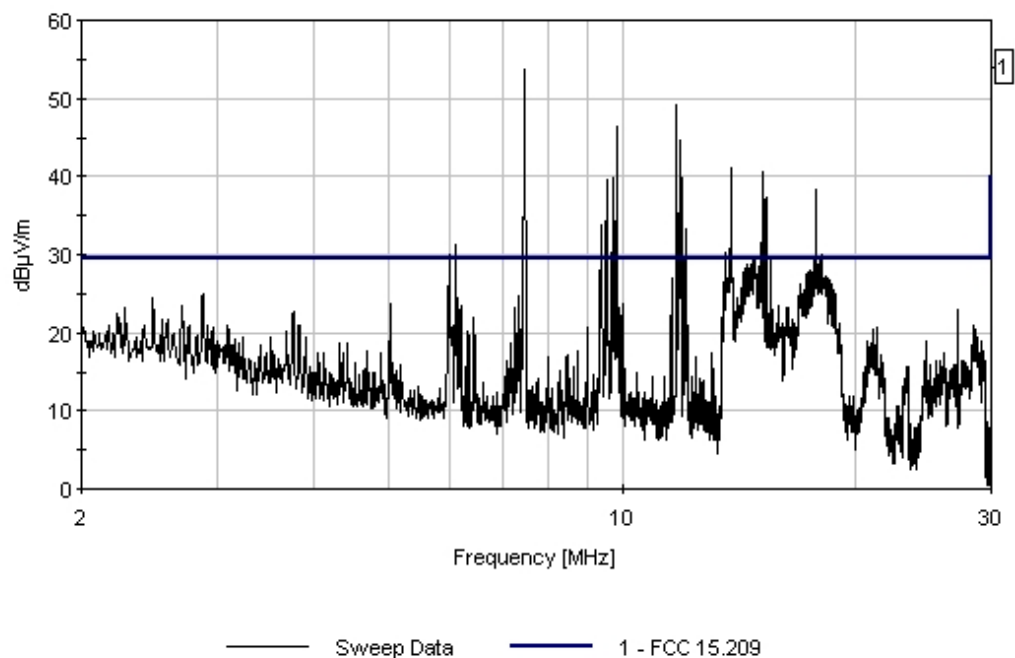

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:34:34
 Sequence#: 364
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	14.822M	31.0	+0.2	+0.2	+8.6	-12.8	+0.0	27.2	29.5	-2.3	Perpe
QP											
^	14.822M	33.7	+0.2	+0.2	+8.6	-12.8	+0.0	29.9	29.5	+0.4	Perpe
3	17.212M	29.1	+0.2	+0.2	+8.4	-12.8	+0.0	25.1	29.5	-4.4	Perpe
4	15.947M	28.4	+0.2	+0.2	+8.5	-12.8	+0.0	24.5	29.5	-5.0	Perpe
5	13.901M	28.1	+0.2	+0.2	+8.7	-12.8	+0.0	24.4	29.5	-5.1	Perpe
QP											
^	13.901M	30.5	+0.2	+0.2	+8.7	-12.8	+0.0	26.8	29.5	-2.7	Perpe

7	18.132M	28.0	+0.2	+0.3	+8.3	-12.8	+0.0	24.0	29.5	-5.5	Perpe
8	28.557M	22.8	+0.3	+0.3	+5.5	-12.8	+0.0	16.1	29.5	-13.4	Perpe
9	26.082M	21.5	+0.2	+0.3	+6.5	-12.8	+0.0	15.7	29.5	-13.8	Perpe
10	24.732M	19.8	+0.2	+0.3	+7.0	-12.8	+0.0	14.5	29.5	-15.0	Perpe
11	23.287M	18.5	+0.2	+0.3	+7.3	-12.8	+0.0	13.5	29.5	-16.0	Perpe
12	28.787M	19.6	+0.3	+0.3	+5.4	-12.8	+0.0	12.8	29.5	-16.7	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 16:34:34 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 364 Perpendicular
Overhead Test Site 2 Position 2 Medium Lines only. Notches off. MODE 2/3. Formal Power

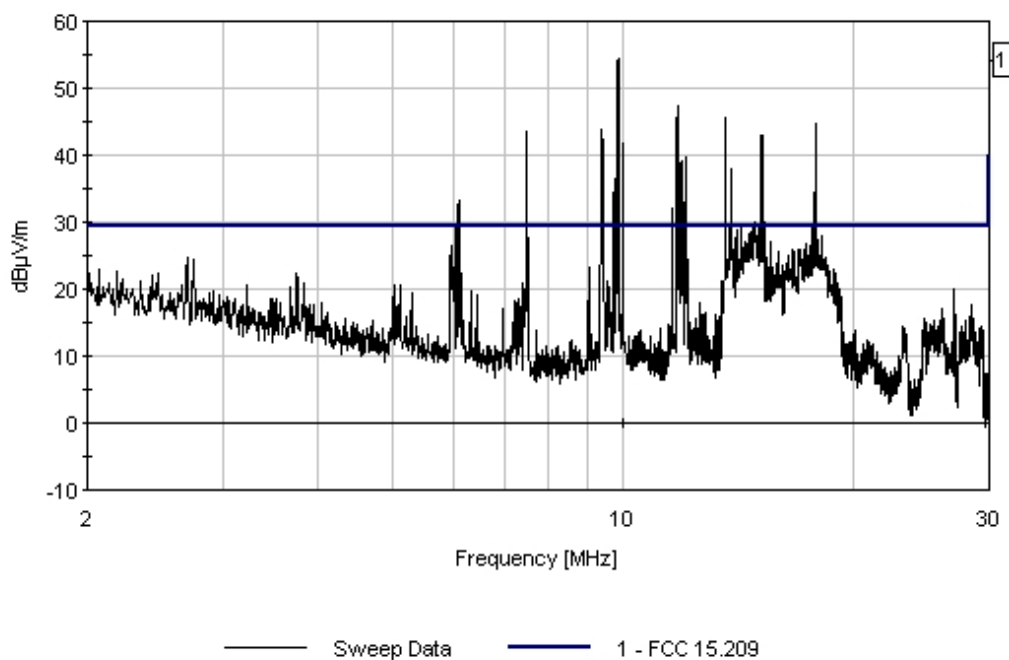

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:41:16
 Sequence#: 365
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.834M	30.7	+0.2	+0.2	+8.6	-12.8	+0.0	26.9	29.5	-2.6	Paral
QP											
^	14.834M	32.7	+0.2	+0.2	+8.6	-12.8	+0.0	28.9	29.5	-0.6	Paral
3	18.129M	30.3	+0.2	+0.3	+8.3	-12.8	+0.0	26.3	29.5	-3.2	Paral
QP											
^	18.129M	32.9	+0.2	+0.3	+8.3	-12.8	+0.0	28.9	29.5	-0.6	Paral
5	17.344M	28.8	+0.2	+0.3	+8.3	-12.8	+0.0	24.8	29.5	-4.7	Paral
QP											
^	17.344M	32.6	+0.2	+0.3	+8.3	-12.8	+0.0	28.6	29.5	-0.9	Paral

7	15.779M	27.5	+0.2	+0.2	+8.5	-12.8	+0.0	23.6	29.5	-5.9	Paral
8	26.194M	25.8	+0.2	+0.3	+6.4	-12.8	+0.0	19.9	29.5	-9.6	Paral
9	24.679M	24.2	+0.2	+0.3	+7.0	-12.8	+0.0	18.9	29.5	-10.6	Paral
10	27.674M	23.5	+0.3	+0.3	+5.8	-12.8	+0.0	17.1	29.5	-12.4	Paral
11	29.229M	23.6	+0.3	+0.3	+5.3	-12.8	+0.0	16.7	29.5	-12.8	Paral
12	21.394M	20.0	+0.2	+0.3	+7.7	-12.8	+0.0	15.4	29.5	-14.1	Paral
13	23.294M	17.8	+0.2	+0.3	+7.3	-12.8	+0.0	12.8	29.5	-16.7	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 16:41:16 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 365 Parallel
Overhead Test Site 2 Position 2 Medium Lines only. Notches off. MODE 2/3. Formal Power

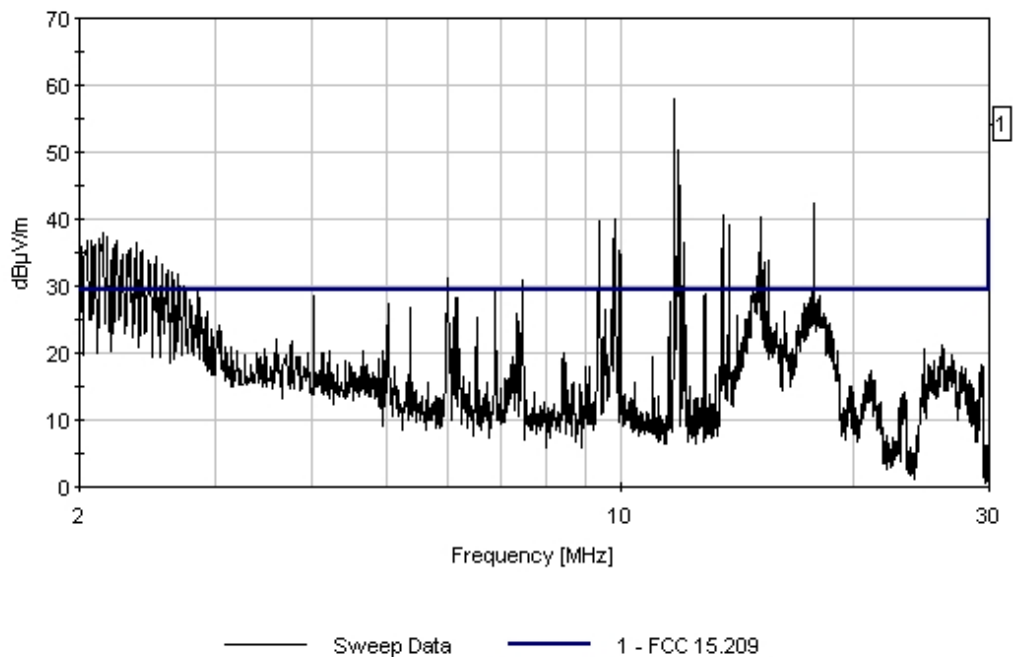

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:22:31
 Sequence#: 362
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.818M	32.2	+0.2	+0.2	+8.6	-12.8	+0.0	28.4	29.5	-1.1	Paral
QP											
^	14.818M	34.6	+0.2	+0.2	+8.6	-12.8	+0.0	30.8	29.5	+1.3	Paral
3	17.043M	29.3	+0.2	+0.2	+8.4	-12.8	+0.0	25.3	29.5	-4.2	Paral
4	16.578M	28.1	+0.2	+0.2	+8.4	-12.8	+0.0	24.1	29.5	-5.4	Paral
5	18.133M	25.8	+0.2	+0.3	+8.3	-12.8	+0.0	21.8	29.5	-7.7	Paral
6	26.113M	24.0	+0.2	+0.3	+6.4	-12.8	+0.0	18.1	29.5	-11.4	Paral

7	24.753M	22.9	+0.2	+0.3	+7.0	-12.8	+0.0	17.6	29.5	-11.9	Paral
8	23.288M	21.8	+0.2	+0.3	+7.3	-12.8	+0.0	16.8	29.5	-12.7	Paral
9	28.598M	23.3	+0.3	+0.3	+5.5	-12.8	+0.0	16.6	29.5	-12.9	Paral
10	26.563M	21.5	+0.2	+0.3	+6.3	-12.8	+0.0	15.5	29.5	-14.0	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 16:22:31 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 362 Parallel
Overhead Test Site 2 Position 3 Medium Lines only. Notches off. MODE 2/3. Formal Power

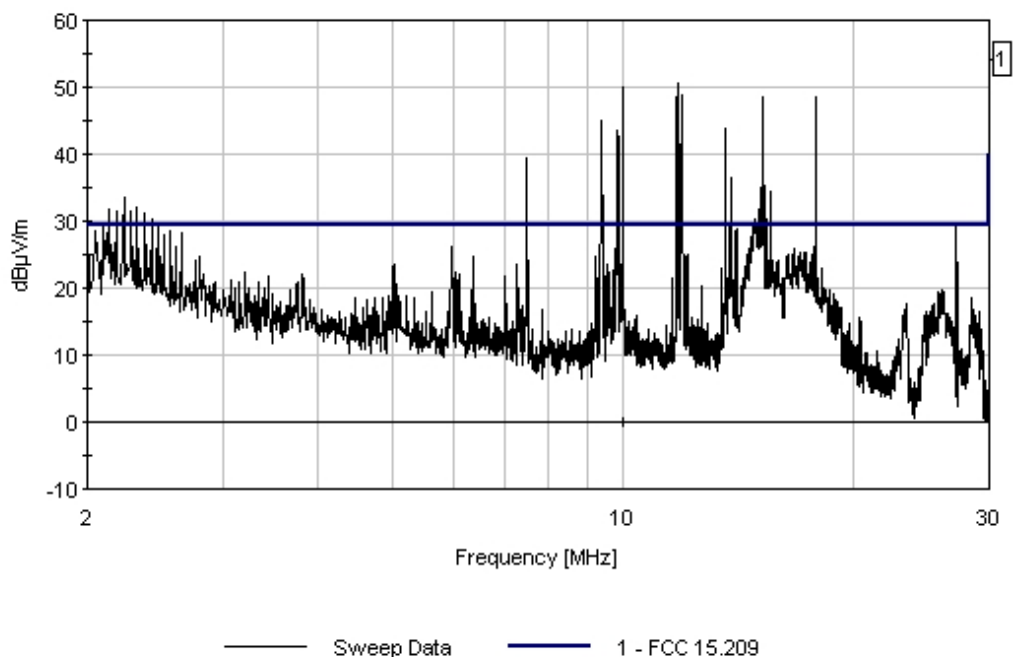

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:26:20
 Sequence#: 363
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	14.380M	24.6	+0.2	+0.2	+8.7	-12.8	+0.0	20.9	29.5	-8.6	Perpe
2	17.970M	21.2	+0.2	+0.3	+8.3	-12.8	+0.0	17.2	29.5	-12.3	Perpe
3	19.065M	20.2	+0.2	+0.3	+8.2	-12.8	+0.0	16.1	29.5	-13.4	Perpe
4	17.350M	18.5	+0.2	+0.3	+8.3	-12.8	+0.0	14.5	29.5	-15.0	Perpe
5	28.445M	19.5	+0.3	+0.3	+5.6	-12.8	+0.0	12.9	29.5	-16.6	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 16:26:20 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 363 Perpendicular
Overhead Test Site 2 Position 3 Medium Lines only, Notches off, MODE 2/3, Formal Power

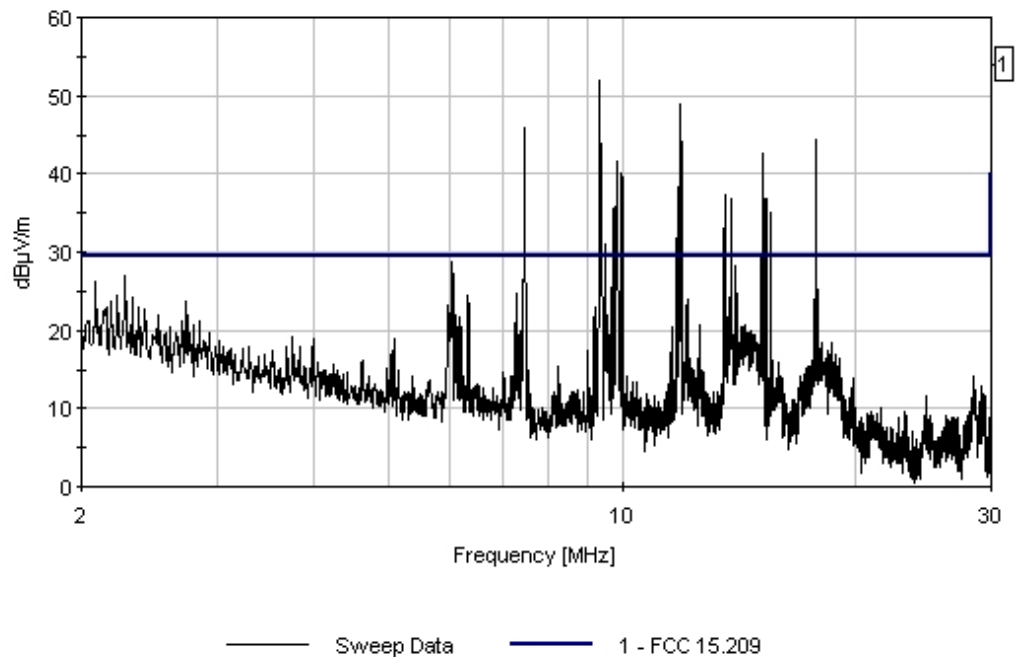

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:11:16
 Sequence#: 360
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.817M	33.1	+0.2	+0.2	+8.6	-12.8	+0.0	29.3	29.5	-0.2	Paral
QP											
^	14.817M	35.2	+0.2	+0.2	+8.6	-12.8	+0.0	31.4	29.5	+1.9	Paral
3	28.434M	32.1	+0.3	+0.3	+5.6	-12.8	+0.0	25.5	29.5	-4.0	Paral
4	17.195M	28.3	+0.2	+0.2	+8.4	-12.8	+0.0	24.3	29.5	-5.2	Paral
QP											
^	17.195M	30.9	+0.2	+0.2	+8.4	-12.8	+0.0	26.9	29.5	-2.6	Paral
6	18.130M	27.8	+0.2	+0.3	+8.3	-12.8	+0.0	23.8	29.5	-5.7	Paral
QP											
^	18.130M	30.9	+0.2	+0.3	+8.3	-12.8	+0.0	26.9	29.5	-2.6	Paral

8	29.362M	30.5	+0.3	+0.3	+5.2	-12.8	+0.0	23.5	29.5	-6.0	Paral
9	15.782M	27.3	+0.2	+0.2	+8.5	-12.8	+0.0	23.4	29.5	-6.1	Paral
10	24.751M	28.1	+0.2	+0.3	+7.0	-12.8	+0.0	22.8	29.5	-6.7	Paral
QP											
^	24.751M	31.2	+0.2	+0.3	+7.0	-12.8	+0.0	25.9	29.5	-3.6	Paral
12	25.001M	26.5	+0.2	+0.3	+6.9	-12.8	+0.0	21.1	29.5	-8.4	Paral
13	23.085M	26.0	+0.2	+0.3	+7.3	-12.8	+0.0	21.0	29.5	-8.5	Paral
14	26.081M	25.4	+0.2	+0.3	+6.5	-12.8	+0.0	19.6	29.5	-9.9	Paral
15	21.370M	19.8	+0.2	+0.3	+7.7	-12.8	+0.0	15.2	29.5	-14.3	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 16:11:16 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 360 Parallel
Overhead Test Site 2 Position 4 Medium Lines only. Notches off. MODE 2/3. Formal Power

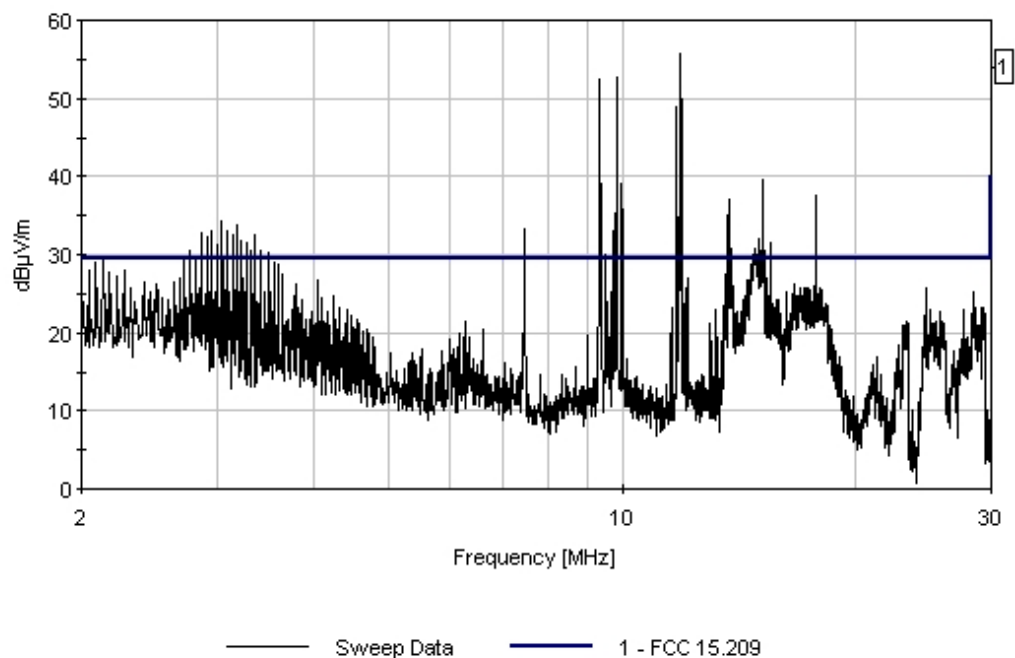

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 16:17:08
 Sequence#: 361
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.4 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	14.820M	28.9	+0.2	+0.2	+8.6	-12.8	+0.0	25.1	29.5	-4.4	Perpe
QP											
^	14.820M	31.8	+0.2	+0.2	+8.6	-12.8	+0.0	28.0	29.5	-1.5	Perpe
3	15.405M	27.2	+0.2	+0.2	+8.6	-12.8	+0.0	23.4	29.5	-6.1	Perpe
4	17.985M	25.0	+0.2	+0.3	+8.3	-12.8	+0.0	21.0	29.5	-8.5	Perpe
5	18.280M	24.4	+0.2	+0.3	+8.3	-12.8	+0.0	20.4	29.5	-9.1	Perpe
6	18.560M	21.3	+0.2	+0.3	+8.2	-12.8	+0.0	17.2	29.5	-12.3	Perpe

7	23.095M	21.4	+0.2	+0.3	+7.3	-12.8	+0.0	16.4	29.5	-13.1	Perpe
8	28.320M	22.3	+0.3	+0.3	+5.6	-12.8	+0.0	15.7	29.5	-13.8	Perpe
9	24.685M	20.8	+0.2	+0.3	+7.0	-12.8	+0.0	15.5	29.5	-14.0	Perpe
10	27.500M	20.9	+0.3	+0.3	+5.9	-12.8	+0.0	14.6	29.5	-14.9	Perpe
11	29.365M	18.1	+0.3	+0.3	+5.2	-12.8	+0.0	11.1	29.5	-18.4	Perpe
12	21.360M	15.4	+0.2	+0.3	+7.7	-12.8	+0.0	10.8	29.5	-18.7	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 16:17:08 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 361 Perpendicular
Overhead Test Site 2 Position 4 Medium Lines only. Notches off. MODE 2/3. Formal Power

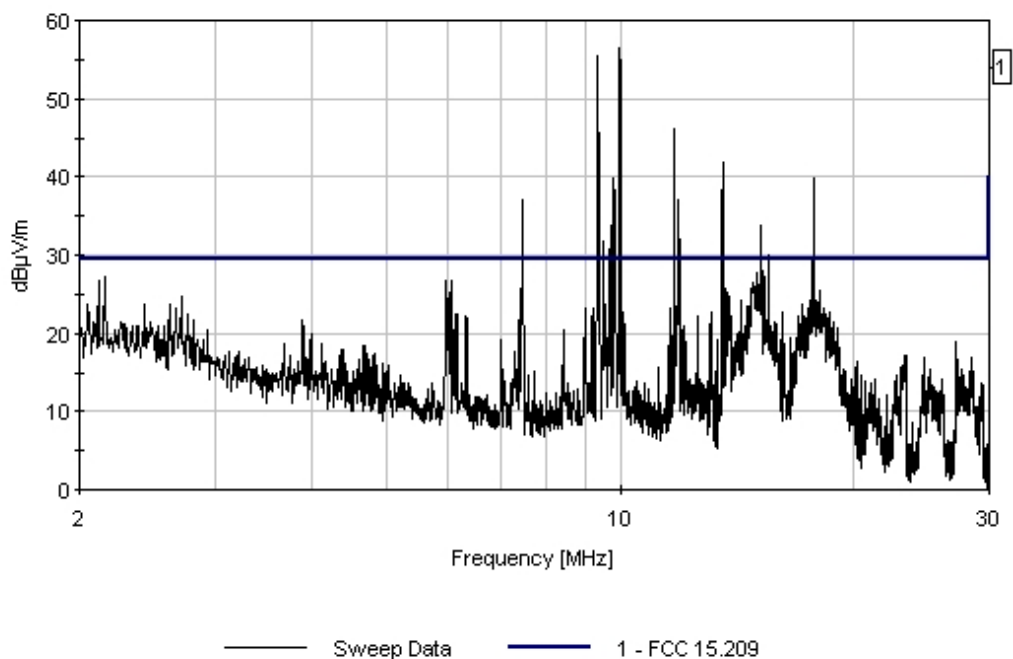

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 15:40:40
 Sequence#: 358
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.818M	33.2	+0.2	+0.2	+8.6	-12.8	+0.0	29.4	29.5	-0.1	Paral
QP											
^	14.818M	36.0	+0.2	+0.2	+8.6	-12.8	+0.0	32.2	29.5	+2.7	Paral
3	15.631M	28.3	+0.2	+0.2	+8.5	-12.8	+0.0	24.4	29.5	-5.1	Paral
QP											
^	15.631M	31.5	+0.2	+0.2	+8.5	-12.8	+0.0	27.6	29.5	-1.9	Paral
5	14.215M	26.2	+0.2	+0.2	+8.7	-12.8	+0.0	22.5	29.5	-7.0	Paral
6	18.369M	26.0	+0.2	+0.3	+8.2	-12.8	+0.0	21.9	29.5	-7.6	Paral

7	16.409M	25.1	+0.2	+0.2	+8.4	-12.8	+0.0	21.1	29.5	-8.4	Paral
QP											
^	16.409M	30.5	+0.2	+0.2	+8.4	-12.8	+0.0	26.5	29.5	-3.0	Paral
9	24.724M	22.2	+0.2	+0.3	+7.0	-12.8	+0.0	16.9	29.5	-12.6	Paral
10	28.434M	18.8	+0.3	+0.3	+5.6	-12.8	+0.0	12.2	29.5	-17.3	Paral
11	12.750M	15.7	+0.2	+0.2	+8.8	-12.8	+0.0	12.1	29.5	-17.4	Paral
12	26.929M	18.2	+0.2	+0.3	+6.1	-12.8	+0.0	12.0	29.5	-17.5	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 15:40:40 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 358 Parallel
Overhead Test Site 2 Position 5 Medium Lines only. Notches off. MODE 2/3. Formal Power

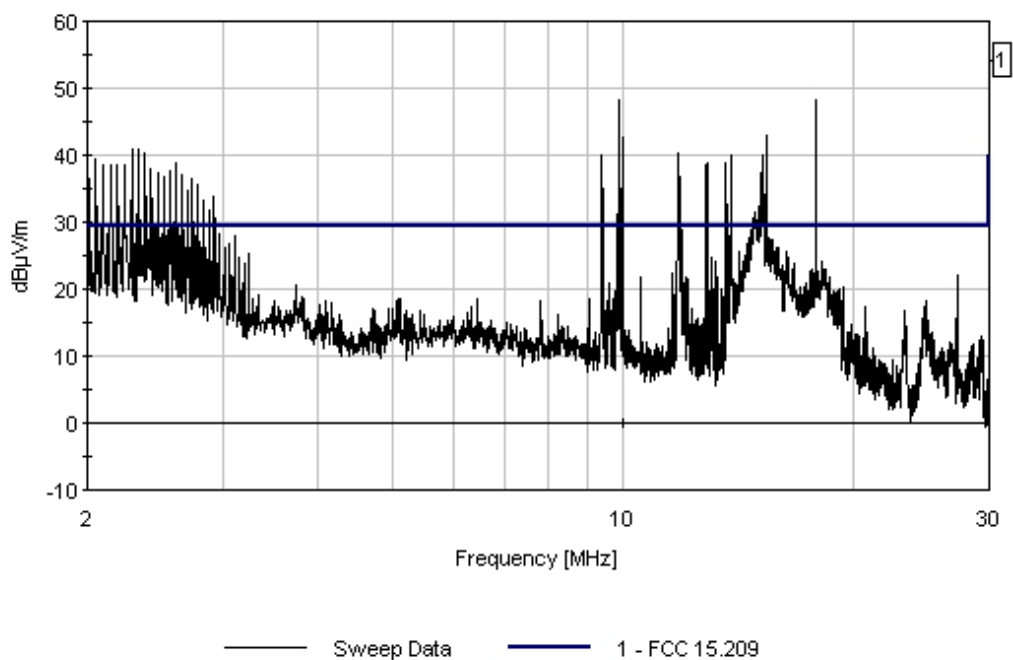

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 15:44:13
 Sequence#: 359
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.855M	26.3	+0.2	+0.2	+8.6	-12.8	+0.0	22.5	29.5	-7.0	Perpe
2	15.610M	21.8	+0.2	+0.2	+8.5	-12.8	+0.0	17.9	29.5	-11.6	Perpe
3	24.740M	21.1	+0.2	+0.3	+7.0	-12.8	+0.0	15.8	29.5	-13.7	Perpe
4	16.450M	19.5	+0.2	+0.2	+8.4	-12.8	+0.0	15.5	29.5	-14.0	Perpe
5	23.330M	17.1	+0.2	+0.3	+7.3	-12.8	+0.0	12.1	29.5	-17.4	Perpe
6	26.135M	17.7	+0.2	+0.3	+6.4	-12.8	+0.0	11.7	29.5	-17.8	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 15:44:13 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 359 Perpendicular
 Overhead Test Site 2 Position 5 Medium Lines only. Notches off. MODE 2/3. Formal Power

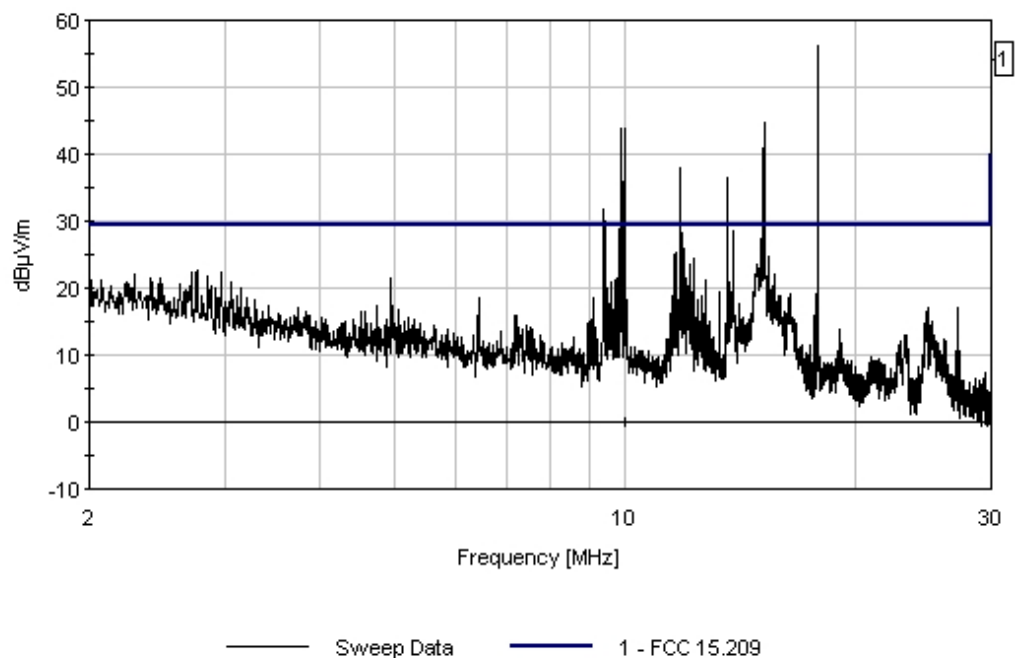

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 15:26:26
 Sequence#: 356
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	18.390M	26.6	+0.2	+0.3	+8.2	-12.8	+0.0	22.5	29.5	-7.0	Perpe
2	12.760M	22.5	+0.2	+0.2	+8.8	-12.8	+0.0	18.9	29.5	-10.6	Perpe
3	16.345M	22.2	+0.2	+0.2	+8.5	-12.8	+0.0	18.3	29.5	-11.2	Perpe
4	17.340M	21.9	+0.2	+0.3	+8.3	-12.8	+0.0	17.9	29.5	-11.6	Perpe
5	15.640M	20.5	+0.2	+0.2	+8.5	-12.8	+0.0	16.6	29.5	-12.9	Perpe
6	24.585M	18.2	+0.2	+0.3	+7.0	-12.8	+0.0	12.9	29.5	-16.6	Perpe

7	26.075M	17.4	+0.2	+0.3	+6.5	-12.8	+0.0	11.6	29.5	-17.9	Perpe
8	29.130M	17.6	+0.3	+0.3	+5.3	-12.8	+0.0	10.7	29.5	-18.8	Perpe
9	23.435M	14.9	+0.2	+0.3	+7.2	-12.8	+0.0	9.8	29.5	-19.7	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 15:26:26 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 356 Perpendicular
Overhead Test Site 2 Position 6 Medium Lines only. Notches off. MODE 2/3. Formal Power

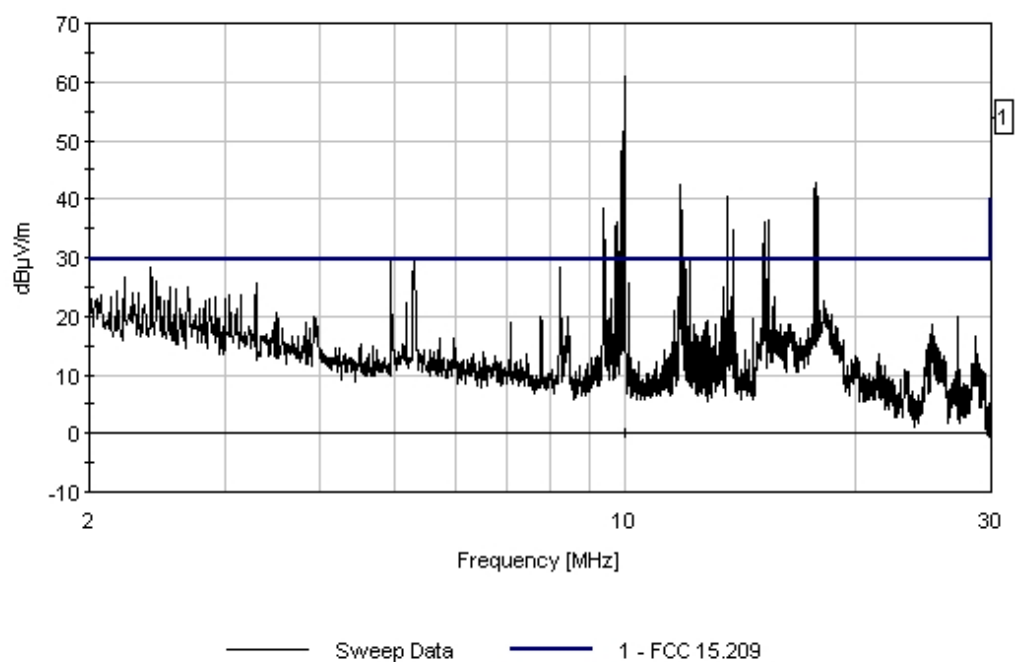

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: Corinex
 Model: MV Gateway
 S/N: 6213625658

Date: 3/29/2006
 Time: 15:33:47
 Sequence#: 357
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	18.596M	28.9	+0.2	+0.3	+8.2	-12.8	+0.0	24.8	29.5	-4.7	Paral
2	18.129M	28.0	+0.2	+0.3	+8.3	-12.8	+0.0	24.0	29.5	-5.5	Paral
QP											
^	18.129M	31.0	+0.2	+0.3	+8.3	-12.8	+0.0	27.0	29.5	-2.5	Paral
4	14.819M	27.8	+0.2	+0.2	+8.6	-12.8	+0.0	24.0	29.5	-5.5	Paral
QP											
^	14.819M	31.6	+0.2	+0.2	+8.6	-12.8	+0.0	27.8	29.5	-1.7	Paral
6	15.934M	27.4	+0.2	+0.2	+8.5	-12.8	+0.0	23.5	29.5	-6.0	Paral

7	16.409M	27.4	+0.2	+0.2	+8.4	-12.8	+0.0	23.4	29.5	-6.1	Paral
8	28.551M	28.1	+0.3	+0.3	+5.5	-12.8	+0.0	21.4	29.5	-8.1	Paral
9	25.006M	26.8	+0.2	+0.3	+6.9	-12.8	+0.0	21.4	29.5	-8.1	Paral
10	16.969M	24.3	+0.2	+0.2	+8.4	-12.8	+0.0	20.3	29.5	-9.2	Paral
11	24.721M	24.8	+0.2	+0.3	+7.0	-12.8	+0.0	19.5	29.5	-10.0	Paral
12	26.156M	24.8	+0.2	+0.3	+6.4	-12.8	+0.0	18.8	29.5	-10.7	Paral
13	29.096M	25.3	+0.3	+0.3	+5.3	-12.8	+0.0	18.4	29.5	-11.1	Paral
14	26.881M	23.4	+0.2	+0.3	+6.1	-12.8	+0.0	17.2	29.5	-12.3	Paral
15	23.281M	21.9	+0.2	+0.3	+7.3	-12.8	+0.0	16.9	29.5	-12.6	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 15:33:47 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 357 Parallel
Overhead Test Site 2 Position 6 Medium Lines only. Notches off. MODE 2/3. Formal Power

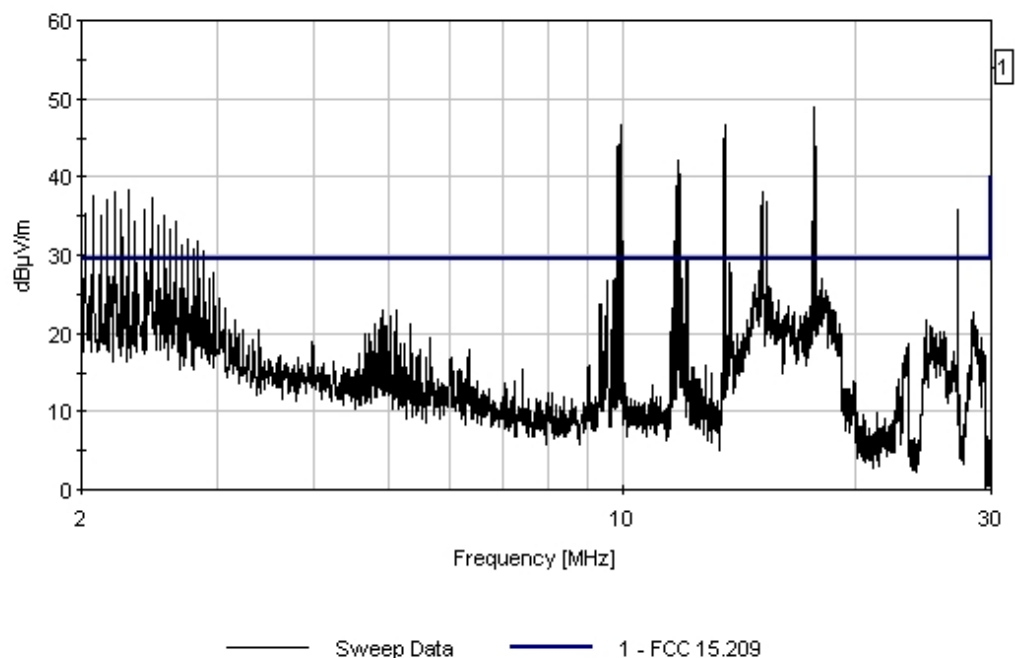

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 15:11:42
 Sequence#: 354
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	18.325M	24.8	+0.2	+0.3	+8.3	-12.8	+0.0	20.8	29.5	-8.7	Paral
2	16.420M	22.5	+0.2	+0.2	+8.4	-12.8	+0.0	18.5	29.5	-11.0	Paral
3	23.290M	22.1	+0.2	+0.3	+7.3	-12.8	+0.0	17.0	29.5	-12.5	Paral
4	26.875M	19.2	+0.2	+0.3	+6.1	-12.8	+0.0	13.0	29.5	-16.5	Paral
5	29.085M	18.6	+0.3	+0.3	+5.3	-12.8	+0.0	11.7	29.5	-17.8	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 15:11:42 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 354 Parallel
 Overhead Test Site 2 Position 7 Medium Lines only. Notches off. MODE 2/3. Formal Power

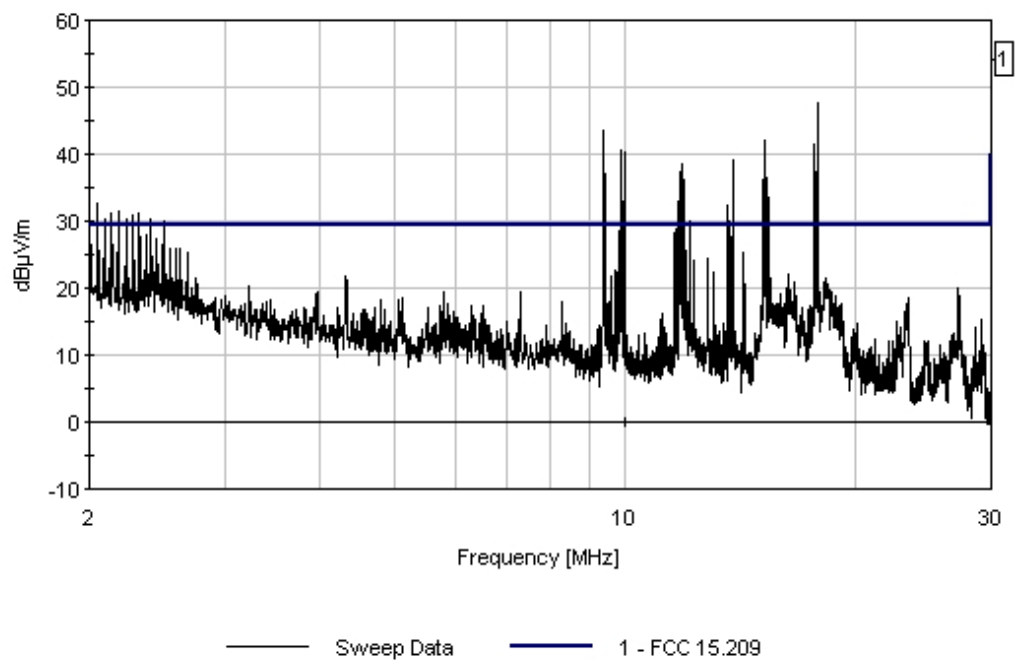

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 15:16:44
 Sequence#: 355
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.848M	29.3	+0.2	+0.2	+8.6	-12.8	+0.0	25.5	29.5	-4.0	Perpe
QP											
^	14.848M	31.7	+0.2	+0.2	+8.6	-12.8	+0.0	27.9	29.5	-1.6	Perpe
3	14.530M	27.3	+0.2	+0.2	+8.6	-12.8	+0.0	23.5	29.5	-6.0	Perpe
4	12.570M	23.9	+0.2	+0.2	+8.8	-12.8	+0.0	20.3	29.5	-9.2	Perpe
5	15.628M	23.7	+0.2	+0.2	+8.5	-12.8	+0.0	19.7	29.5	-9.8	Perpe
6	16.568M	23.5	+0.2	+0.2	+8.4	-12.8	+0.0	19.5	29.5	-10.0	Perpe

7	18.138M	20.6	+0.2	+0.3	+8.3	-12.8	+0.0	16.6	29.5	-12.9	Perpe
8	27.333M	19.0	+0.2	+0.3	+6.0	-12.8	+0.0	12.7	29.5	-16.8	Perpe
9	28.288M	18.7	+0.3	+0.3	+5.6	-12.8	+0.0	12.1	29.5	-17.4	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 15:16:44 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 355 Perpendicular
Overhead Test Site 2 Position 7 Medium Lines only. Notches off. MODE 2/3. Formal Power

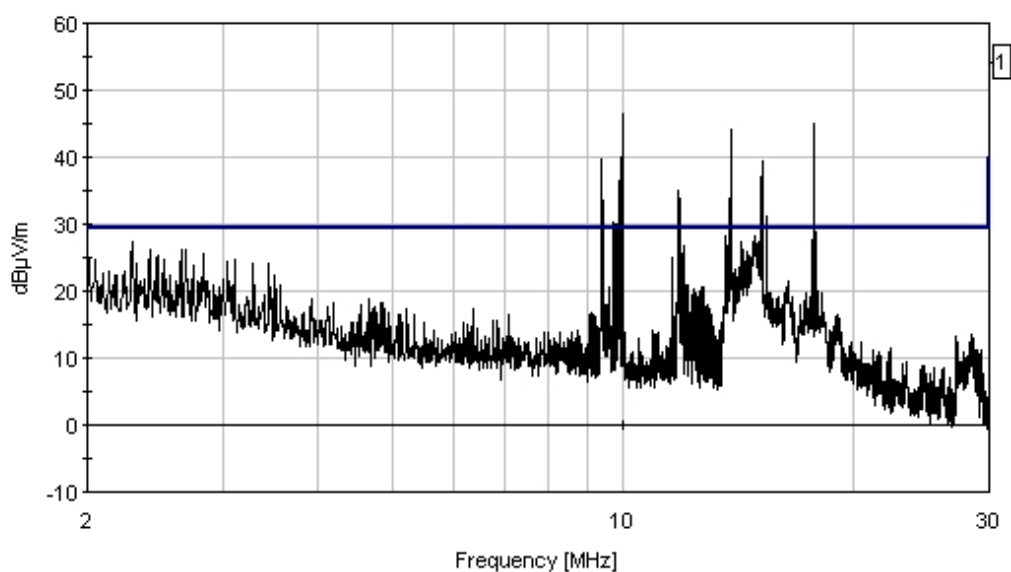

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 15:03:52
 Sequence#: 352
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.970M	27.9	+0.2	+0.3	+8.3	-12.8	+0.0	23.9	29.5	-5.6	Paral
2	18.260M	26.8	+0.2	+0.3	+8.3	-12.8	+0.0	22.8	29.5	-6.7	Paral
3	16.270M	26.6	+0.2	+0.2	+8.5	-12.8	+0.0	22.7	29.5	-6.8	Paral
4	15.520M	26.0	+0.2	+0.2	+8.5	-12.8	+0.0	22.1	29.5	-7.4	Paral
5	16.975M	25.7	+0.2	+0.2	+8.4	-12.8	+0.0	21.7	29.5	-7.8	Paral
6	14.860M	24.5	+0.2	+0.2	+8.6	-12.8	+0.0	20.7	29.5	-8.8	Paral

7	19.060M	24.2	+0.2	+0.3	+8.2	-12.8	+0.0	20.0	29.5	-9.5	Paral
8	24.720M	23.2	+0.2	+0.3	+7.0	-12.8	+0.0	17.9	29.5	-11.6	Paral
9	23.325M	22.4	+0.2	+0.3	+7.3	-12.8	+0.0	17.4	29.5	-12.1	Paral
10	26.320M	21.2	+0.2	+0.3	+6.4	-12.8	+0.0	15.3	29.5	-14.2	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 15:03:52 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 352 Parallel
Overhead Test Site 2 Position 8 Medium Lines only. Notches off. MODE 2/3. Formal Power

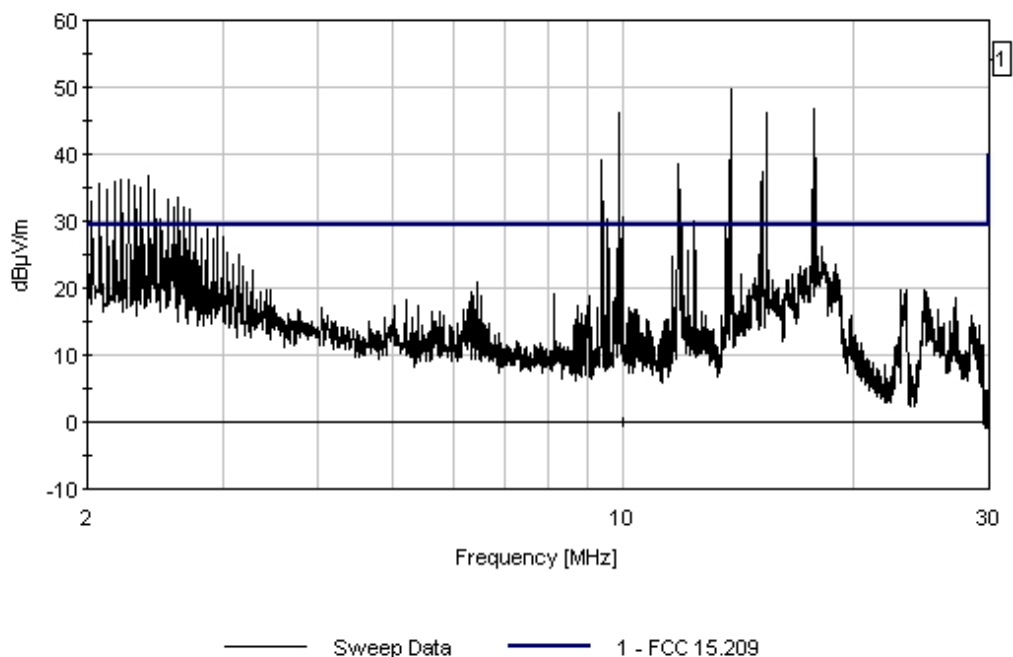

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 15:07:51
 Sequence#: 353
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.890M	24.4	+0.2	+0.2	+8.6	-12.8	+0.0	20.6	29.5	-8.9	Perpe
2	16.335M	22.1	+0.2	+0.2	+8.5	-12.8	+0.0	18.2	29.5	-11.3	Perpe
3	17.950M	21.7	+0.2	+0.3	+8.3	-12.8	+0.0	17.6	29.5	-11.9	Perpe
4	27.055M	23.1	+0.2	+0.3	+6.1	-12.8	+0.0	16.9	29.5	-12.6	Perpe
5	17.050M	20.4	+0.2	+0.2	+8.4	-12.8	+0.0	16.4	29.5	-13.1	Perpe
6	25.740M	17.7	+0.2	+0.3	+6.6	-12.8	+0.0	12.0	29.5	-17.5	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 15:07:51 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 353 Perpendicular
Overhead Test Site 2 Position 8 Medium Lines only. Notches off. MODE 2/3. Formal Power

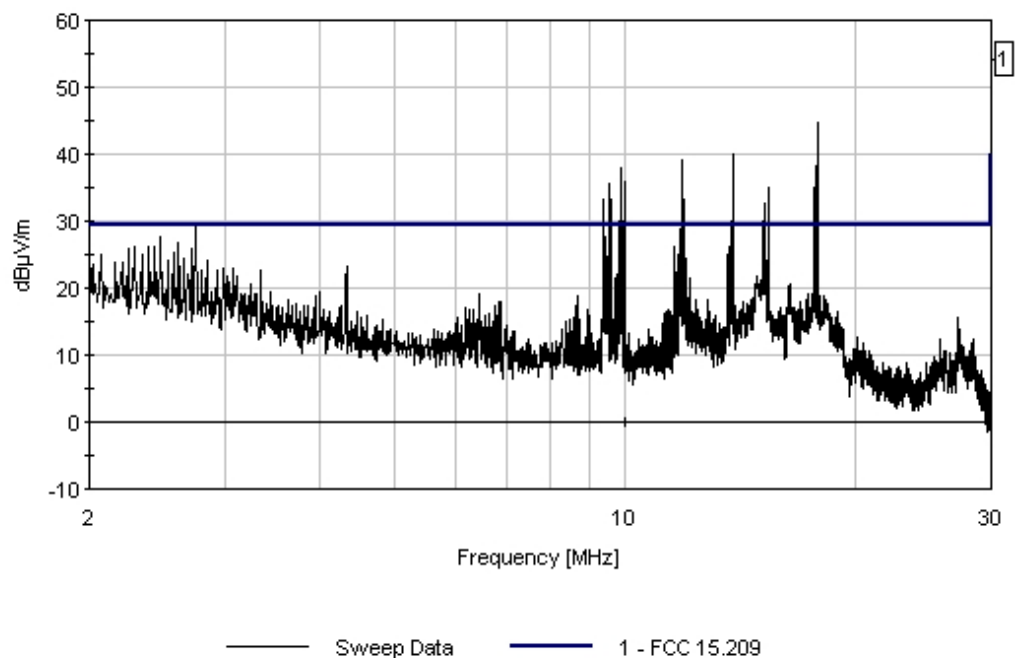

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:53:17
 Sequence#: 350
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	18.260M	26.3	+0.2	+0.3	+8.3	-12.8	+0.0	22.3	29.5	-7.2	Paral
2	19.055M	26.2	+0.2	+0.3	+8.2	-12.8	+0.0	22.1	29.5	-7.4	Paral
3	14.840M	25.6	+0.2	+0.2	+8.6	-12.8	+0.0	21.8	29.5	-7.7	Paral
4	25.005M	26.2	+0.2	+0.3	+6.9	-12.8	+0.0	20.8	29.5	-8.7	Paral
5	16.425M	24.7	+0.2	+0.2	+8.4	-12.8	+0.0	20.7	29.5	-8.8	Paral
6	24.715M	25.5	+0.2	+0.3	+7.0	-12.8	+0.0	20.2	29.5	-9.3	Paral

7	26.235M	24.0	+0.2	+0.3	+6.4	-12.8	+0.0	18.1	29.5	-11.4	Paral
8	27.130M	23.7	+0.2	+0.3	+6.0	-12.8	+0.0	17.4	29.5	-12.1	Paral
9	28.435M	22.4	+0.3	+0.3	+5.6	-12.8	+0.0	15.8	29.5	-13.7	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 14:53:17 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 350 Parallel
Overhead Test Site 2 Position 9 Medium Lines only. Notches off. MODE 2/3. Formal Power

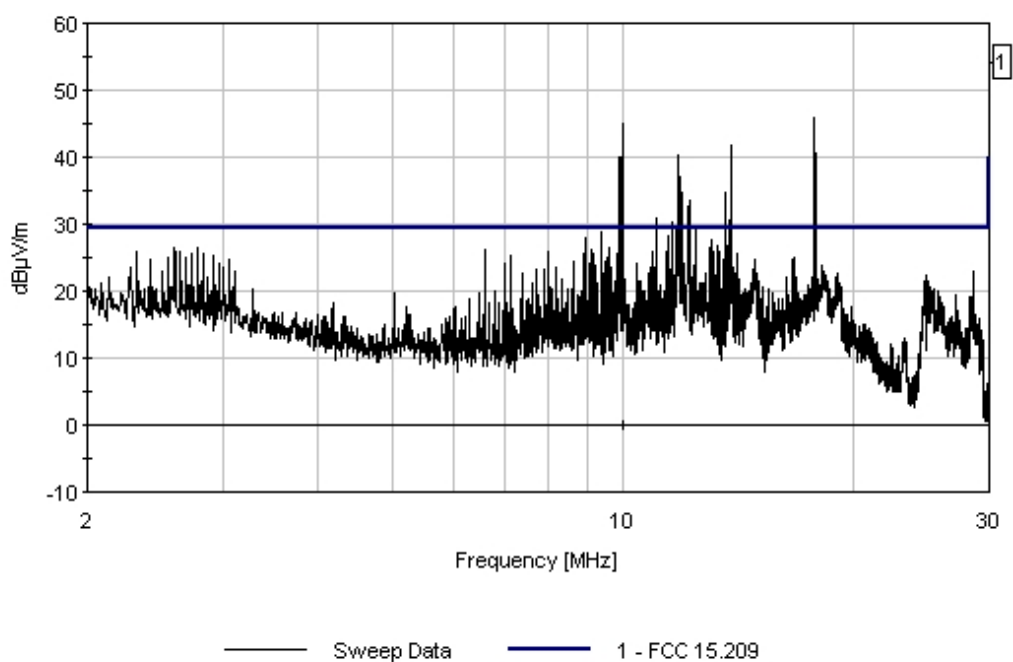

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:57:17
 Sequence#: 351
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	14.880M	25.7	+0.2	+0.2	+8.6	-12.8	+0.0	21.9	29.5	-7.6	Perpe
2	17.340M	19.1	+0.2	+0.3	+8.3	-12.8	+0.0	15.1	29.5	-14.4	Perpe
3	18.905M	19.1	+0.2	+0.3	+8.2	-12.8	+0.0	15.0	29.5	-14.5	Perpe
4	28.465M	18.4	+0.3	+0.3	+5.5	-12.8	+0.0	11.7	29.5	-17.8	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 14:57:17 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 351 Perpendicular
 Overhead Test Site 2 Position 9 Medium Lines only. Notches off. MODE 2/3. Formal Power

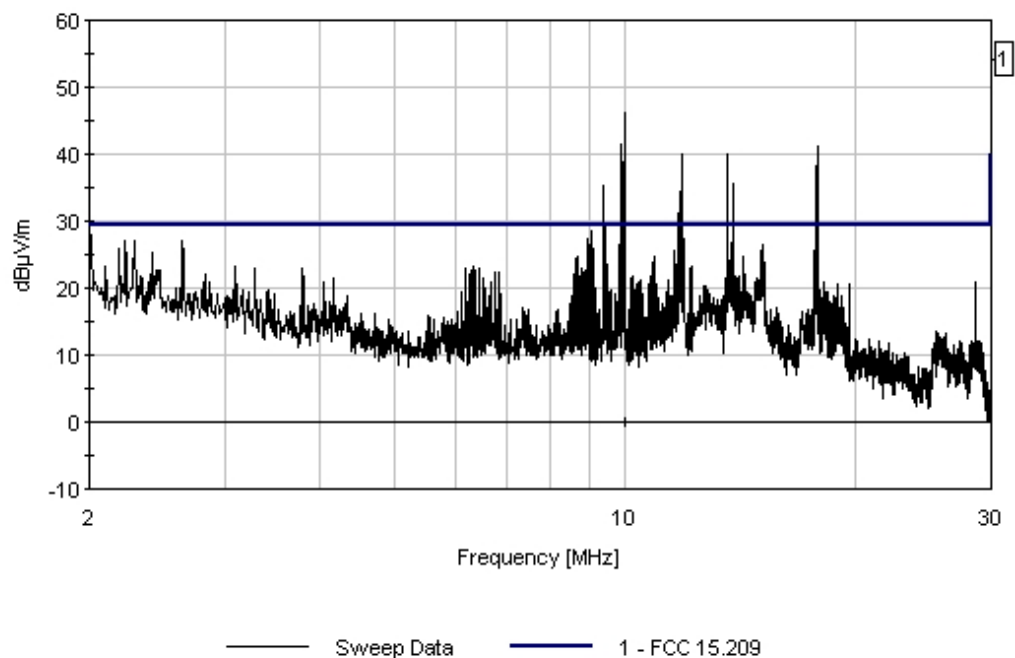

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:41:28
 Sequence#: 348
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	18.295M	27.2	+0.2	+0.3	+8.3	-12.8	+0.0	23.2	29.5	-6.3	Paral
2	17.345M	24.6	+0.2	+0.3	+8.3	-12.8	+0.0	20.6	29.5	-8.9	Paral
3	14.885M	23.9	+0.2	+0.2	+8.6	-12.8	+0.0	20.1	29.5	-9.4	Paral
4	16.560M	23.9	+0.2	+0.2	+8.4	-12.8	+0.0	19.9	29.5	-9.6	Paral
5	28.550M	25.4	+0.3	+0.3	+5.5	-12.8	+0.0	18.7	29.5	-10.8	Paral

6	29.095M	24.6	+0.3	+0.3	+5.3	-12.8	+0.0	17.7	29.5	-11.8	Paral
7	24.645M	20.0	+0.2	+0.3	+7.0	-12.8	+0.0	14.7	29.5	-14.8	Paral
8	25.880M	19.1	+0.2	+0.3	+6.5	-12.8	+0.0	13.3	29.5	-16.2	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 14:41:28 Corinex W/O#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 348 Parallel
Overhead Test Site 2 Position 10 Medium Lines only. Notches off. MODE 2/3. Formal Power

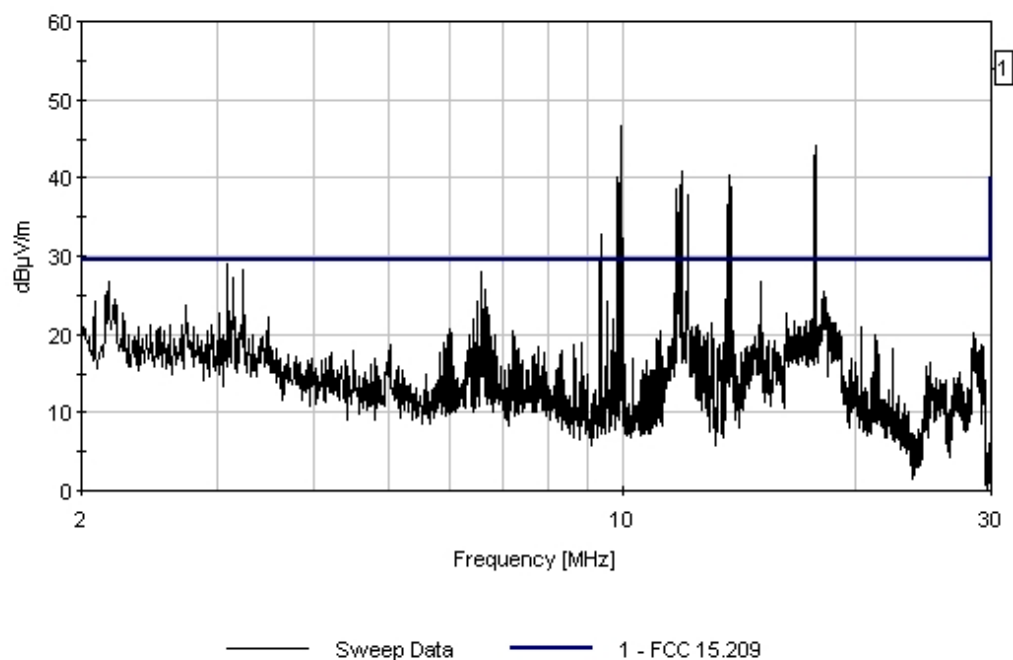

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:45:15
 Sequence#: 349
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	21.045M	21.8	+0.2	+0.3	+7.8	-12.8	+0.0	17.3	29.5	-12.2	Perpe
2	16.570M	19.9	+0.2	+0.2	+8.4	-12.8	+0.0	15.9	29.5	-13.6	Perpe
3	14.790M	17.5	+0.2	+0.2	+8.6	-12.8	+0.0	13.7	29.5	-15.8	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 14:45:15 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 349 Perpendicular
Overhead Test Site 2 Position 10 Medium Lines only, Notches off, MODE 2/3, Formal Power

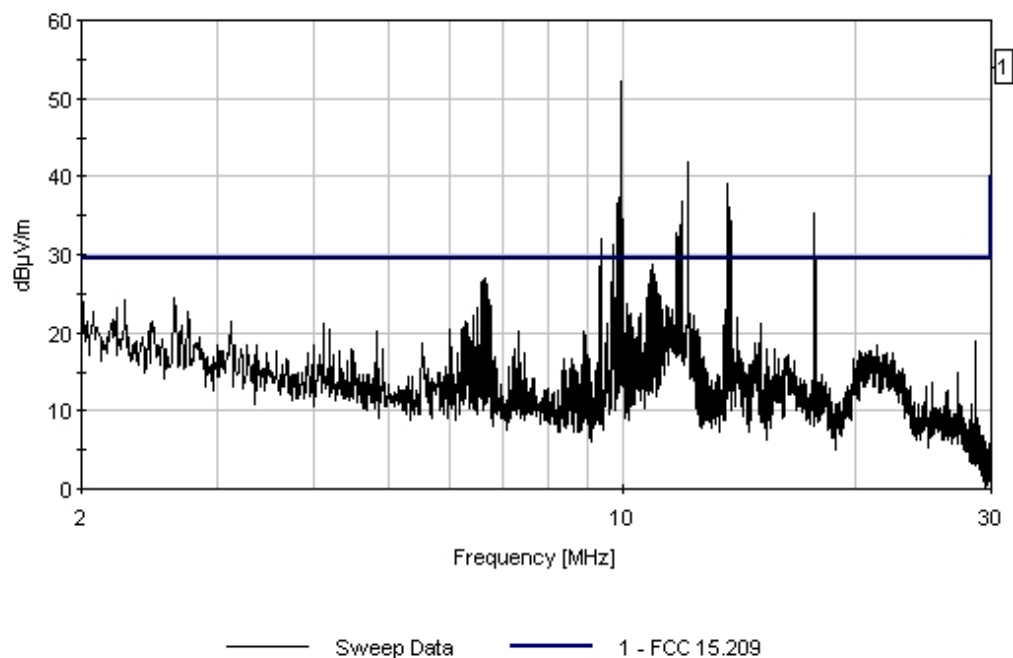

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:30:56
 Sequence#: 346
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	12.762M	30.4	+0.2	+0.2	+8.8	-12.8	+0.0	26.8	29.5	-2.7	Paral
QP											
^	12.762M	33.6	+0.2	+0.2	+8.8	-12.8	+0.0	30.0	29.5	+0.5	Paral
3	14.842M	26.0	+0.2	+0.2	+8.6	-12.8	+0.0	22.2	29.5	-7.3	Paral
4	18.262M	25.9	+0.2	+0.3	+8.3	-12.8	+0.0	21.9	29.5	-7.6	Paral
5	16.717M	24.4	+0.2	+0.2	+8.4	-12.8	+0.0	20.4	29.5	-9.1	Paral

6	23.442M	21.4	+0.2	+0.3	+7.2	-12.8	+0.0	16.3	29.5	-13.2	Paral
7	29.097M	22.3	+0.3	+0.3	+5.3	-12.8	+0.0	15.4	29.5	-14.1	Paral
8	27.402M	19.3	+0.3	+0.3	+5.9	-12.8	+0.0	13.0	29.5	-16.5	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 14:30:56 Corinex W/O#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 346 Parallel
Overhead Test Site 2 Position 11 Medium Lines only. Notches off. MODE 2/3. Formal Power

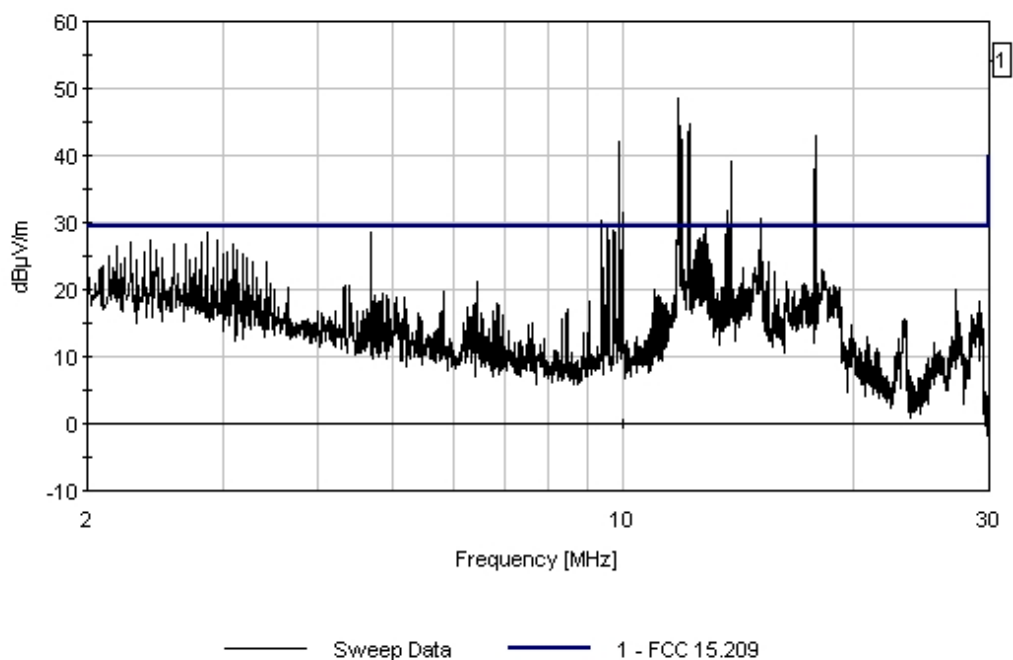

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: Corinex
 Model: MV Gateway
 S/N: 6213625658

Date: 3/29/2006
 Time: 14:34:39
 Sequence#: 347
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	12.757M	31.4	+0.2	+0.2	+8.8	-12.8	+0.0	27.8	29.5	-1.7	Perpe
QP											
^	12.757M	35.6	+0.2	+0.2	+8.8	-12.8	+0.0	32.0	29.5	+2.5	Perpe
3	28.642M	22.9	+0.3	+0.3	+5.5	-12.8	+0.0	16.2	29.5	-13.3	Perpe
4	27.342M	21.7	+0.2	+0.3	+6.0	-12.8	+0.0	15.4	29.5	-14.1	Perpe
5	24.742M	19.3	+0.2	+0.3	+7.0	-12.8	+0.0	14.0	29.5	-15.5	Perpe
6	25.477M	19.4	+0.2	+0.3	+6.7	-12.8	+0.0	13.8	29.5	-15.7	Perpe
7	23.437M	17.9	+0.2	+0.3	+7.2	-12.8	+0.0	12.8	29.5	-16.7	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 14:34:39 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 347 Perpendicular
 Overhead Test Site 2 Position 11 Medium Lines only, Notches off, MODE 2/3, Formal Power

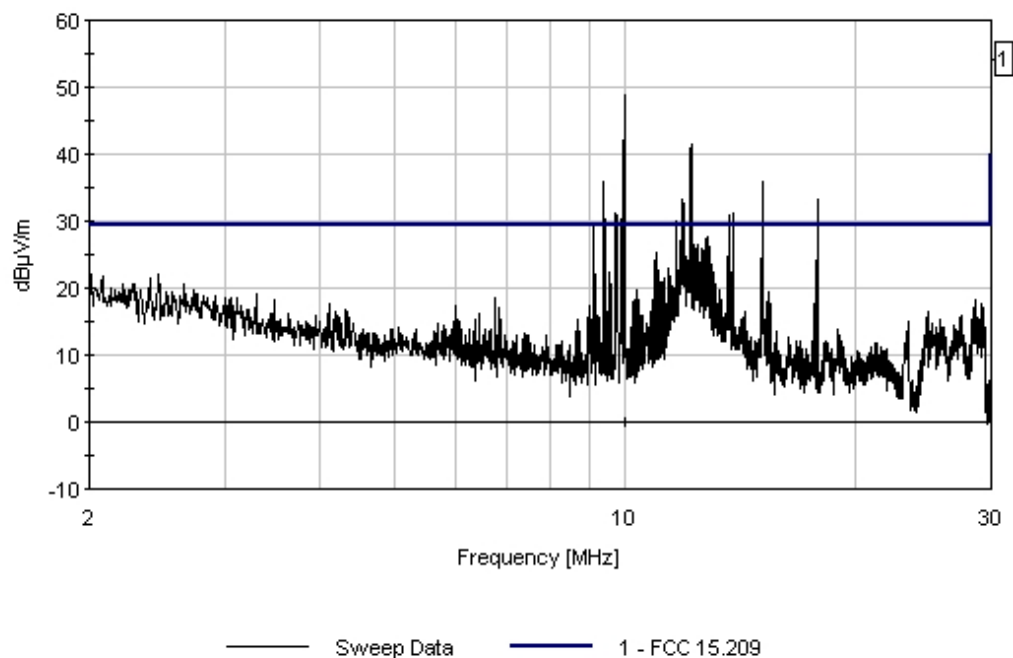

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **6213625658**

Date: 3/29/2006
 Time: 14:21:24
 Sequence#: 344
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \cdot \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	16.405M	20.8	+0.2	+0.2	+8.4	-12.8	+0.0	16.8	29.5	-12.7	Perpe
2	29.230M	22.0	+0.3	+0.3	+5.3	-12.8	+0.0	15.1	29.5	-14.4	Perpe
3	18.910M	18.6	+0.2	+0.3	+8.2	-12.8	+0.0	14.5	29.5	-15.0	Perpe
4	27.505M	20.4	+0.3	+0.3	+5.9	-12.8	+0.0	14.1	29.5	-15.4	Perpe
5	24.730M	19.0	+0.2	+0.3	+7.0	-12.8	+0.0	13.7	29.5	-15.8	Perpe
6	17.165M	17.7	+0.2	+0.2	+8.4	-12.8	+0.0	13.7	29.5	-15.8	Perpe
7	12.700M	17.2	+0.2	+0.2	+8.8	-12.8	+0.0	13.6	29.5	-15.9	Perpe

Overhead Test Site #1 Date: 3/29/2006 Time: 14:21:24 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 344 Perpendicular
 Overhead Test Site 2 Position 12 Medium Lines only, Notches off, MODE 2/3, Formal Power

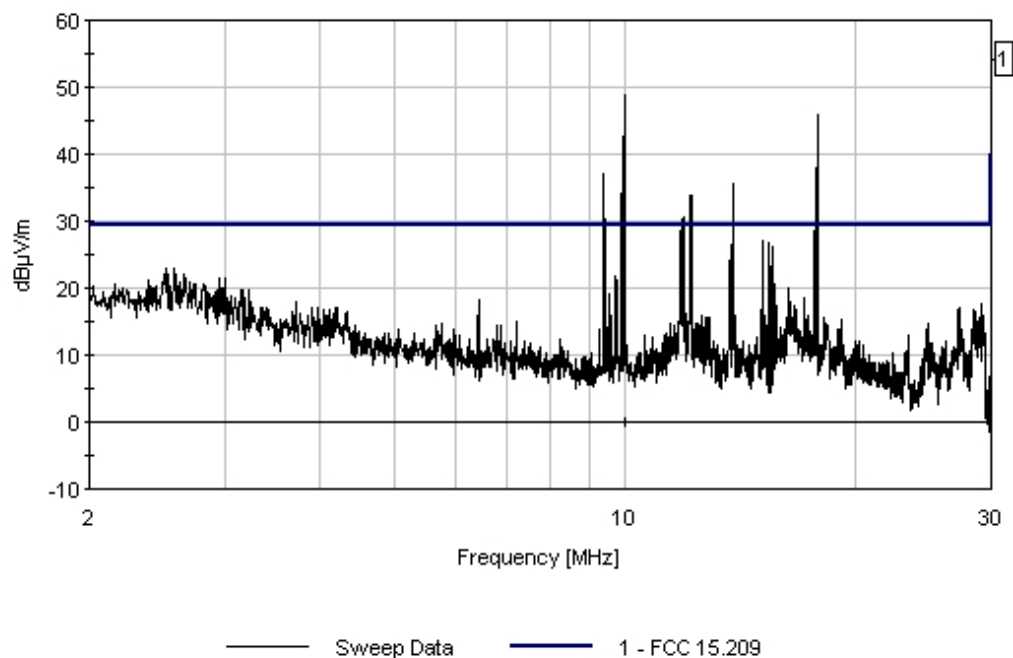

Test Location: Overhead Test Site #2 • Westford Street West of Cochran Street Streetlight Pole #465477 • Houston, TX •
 Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/29/2006
 Test Type: **Radiated Scan** Time: 14:26:15
 Equipment: **BPL MV Gateway** Sequence#: 345
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: 6213625658

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	6213625658
Overhead Coupler	Arteche	Overcap-S-17	0517347/61
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #2 Westford Street west of Cochran Street, Houston, TX. Unit on pole streetlight number 465477. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.35 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.4 meters at 1 meter. Slant Distance correction factor is $-40 \times \log(30/14.4) = -12.8\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S2

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	18.910M	24.9	+0.2	+0.3	+8.2	-12.8	+0.0	20.8	29.5	-8.7	Paral
2	16.910M	24.2	+0.2	+0.2	+8.4	-12.8	+0.0	20.2	29.5	-9.3	Paral
3	16.415M	23.2	+0.2	+0.2	+8.4	-12.8	+0.0	19.2	29.5	-10.3	Paral
4	24.740M	23.9	+0.2	+0.3	+7.0	-12.8	+0.0	18.6	29.5	-10.9	Paral
5	23.425M	18.9	+0.2	+0.3	+7.2	-12.8	+0.0	13.8	29.5	-15.7	Paral
6	14.820M	16.8	+0.2	+0.2	+8.6	-12.8	+0.0	13.0	29.5	-16.5	Paral
7	27.275M	18.8	+0.2	+0.3	+6.0	-12.8	+0.0	12.5	29.5	-17.0	Paral
8	28.495M	19.1	+0.3	+0.3	+5.5	-12.8	+0.0	12.4	29.5	-17.1	Paral

Overhead Test Site #1 Date: 3/29/2006 Time: 14:26:15 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 345 Parallel
 Overhead Test Site 2 Position 12 Medium Lines only, Notches off, MODE 2/3, Formal Power

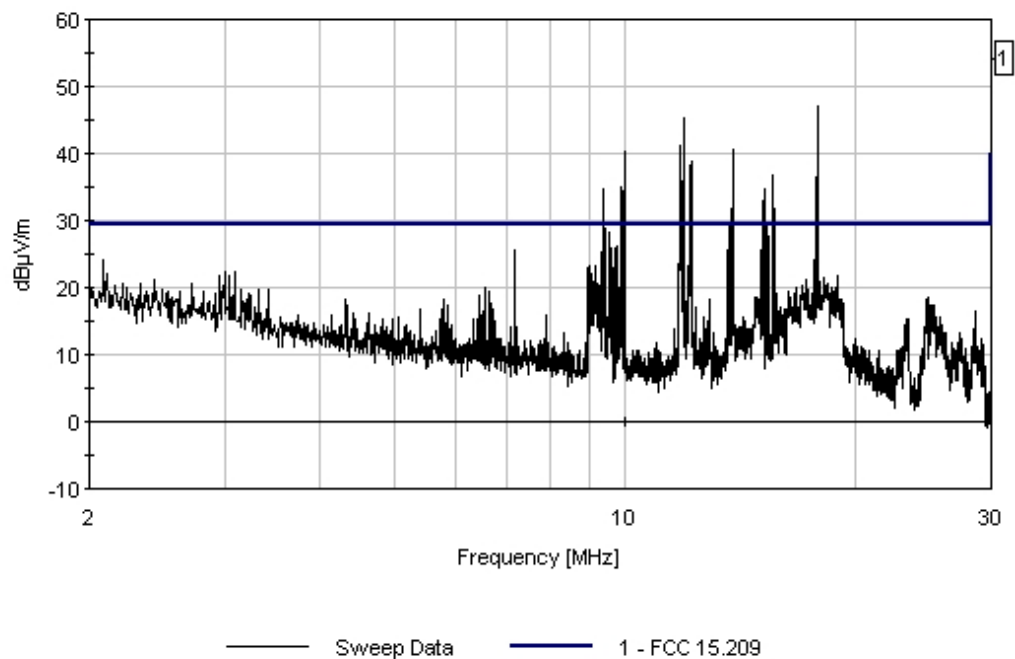

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 14:35:18
 Sequence#: 439
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly across from the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	16.953M	29.2	+0.2	+0.2	+8.4	-12.3	+0.0	25.7	29.5	-3.8	Paral
QP											
^	16.953M	33.0	+0.2	+0.2	+8.4	-12.3	+0.0	29.5	29.5	+0.0	Paral
3	15.275M	26.5	+0.2	+0.2	+8.6	-12.3	+0.0	23.2	29.5	-6.3	Paral
4	4.448M	25.5	+0.1	+0.2	+9.2	-12.3	+0.0	22.7	29.5	-6.8	Paral
5	18.332M	26.0	+0.2	+0.3	+8.3	-12.3	+0.0	22.5	29.5	-7.0	Paral
6	11.470M	24.6	+0.1	+0.2	+8.9	-12.3	+0.0	21.5	29.5	-8.0	Paral
7	9.010M	24.3	+0.1	+0.2	+9.1	-12.3	+0.0	21.4	29.5	-8.1	Paral

8	7.800M	24.2	+0.1	+0.2	+9.1	-12.3	+0.0	21.2	29.5	-8.3	Paral
9	21.675M	23.3	+0.2	+0.3	+7.7	-12.3	+0.0	19.2	29.5	-10.3	Paral
10	20.300M	19.9	+0.2	+0.3	+8.0	-12.3	+0.0	16.1	29.5	-13.4	Paral
11	23.350M	18.9	+0.2	+0.3	+7.3	-12.3	+0.0	14.4	29.5	-15.1	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 14:35:18 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 439 Parallel
Overhead Test Site 3 Position 1 Medium Lines only. Notches off. MODE 1/2. Formal Power

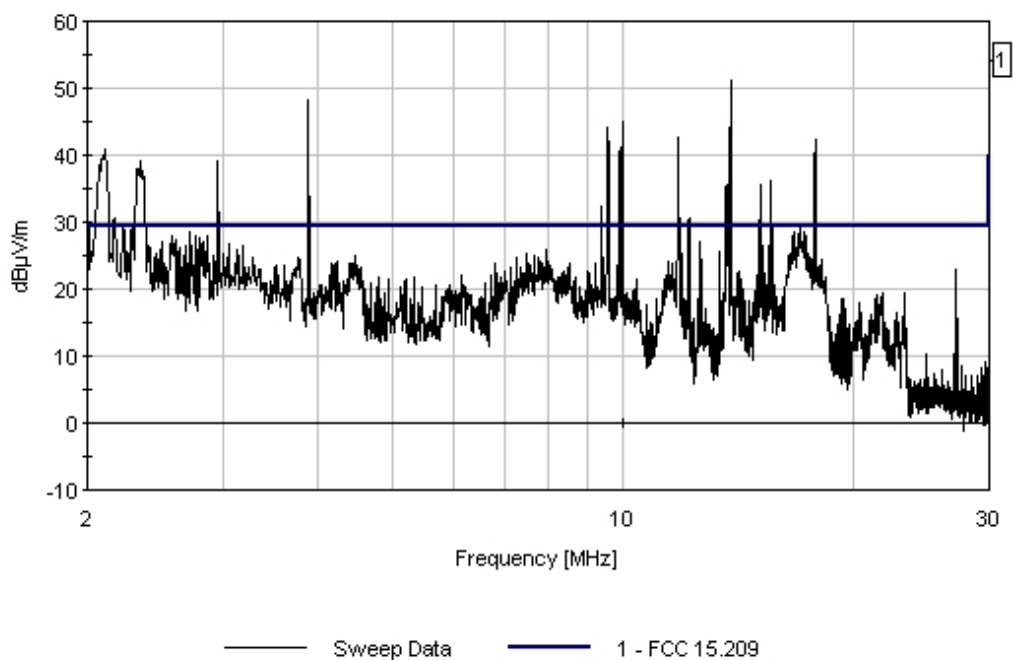

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 14:50:21
Sequence#: 440
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 1: 10 meters out from medium voltage lines the BPL is connected directly across from the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1 QP	16.952M	31.8	+0.2	+0.2	+8.4	-12.3	+0.0	28.3	29.5	-1.2	Perpe
^	16.952M	35.3	+0.2	+0.2	+8.4	-12.3	+0.0	31.8	29.5	+2.3	Perpe
3 QP	6.963M	30.4	+0.1	+0.2	+9.2	-12.3	+0.0	27.6	29.5	-1.9	Perpe
^	6.963M	34.8	+0.1	+0.2	+9.2	-12.3	+0.0	32.0	29.5	+2.5	Perpe
5 QP	16.373M	29.2	+0.2	+0.2	+8.4	-12.3	+0.0	25.7	29.5	-3.8	Perpe
^	16.373M	32.1	+0.2	+0.2	+8.4	-12.3	+0.0	28.6	29.5	-0.9	Perpe

7	3.607M	28.2	+0.1	+0.2	+9.3	-12.3	+0.0	25.5	29.5	-4.0	Perpe
QP											
^	3.607M	32.3	+0.1	+0.2	+9.3	-12.3	+0.0	29.6	29.5	+0.1	Perpe
9	18.309M	27.2	+0.2	+0.3	+8.3	-12.3	+0.0	23.7	29.5	-5.8	Perpe
10	6.180M	26.3	+0.1	+0.1	+9.2	-12.3	+0.0	23.4	29.5	-6.1	Perpe
QP											
^	6.180M	30.1	+0.1	+0.1	+9.2	-12.3	+0.0	27.2	29.5	-2.3	Perpe
12	4.346M	26.1	+0.1	+0.2	+9.2	-12.3	+0.0	23.3	29.5	-6.2	Perpe
QP											
^	4.346M	36.1	+0.1	+0.2	+9.2	-12.3	+0.0	33.3	29.5	+3.8	Perpe
14	9.347M	24.3	+0.1	+0.2	+9.1	-12.3	+0.0	21.4	29.5	-8.1	Perpe
15	11.610M	24.3	+0.1	+0.2	+8.9	-12.3	+0.0	21.2	29.5	-8.3	Perpe
16	8.290M	24.1	+0.1	+0.2	+9.1	-12.3	+0.0	21.2	29.5	-8.3	Perpe
17	12.500M	23.7	+0.2	+0.2	+8.8	-12.3	+0.0	20.6	29.5	-8.9	Perpe
18	23.450M	25.0	+0.2	+0.3	+7.2	-12.3	+0.0	20.4	29.5	-9.1	Perpe
19	21.913M	21.7	+0.2	+0.3	+7.6	-12.3	+0.0	17.5	29.5	-12.0	Perpe
20	22.875M	21.5	+0.2	+0.3	+7.4	-12.3	+0.0	17.1	29.5	-12.4	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 14:50:21 Corinex WVO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 440 Perpendicular
 Overhead Test Site 3 Position 1 Medium Lines only. Notches off. MODE 1/2. Formal Power

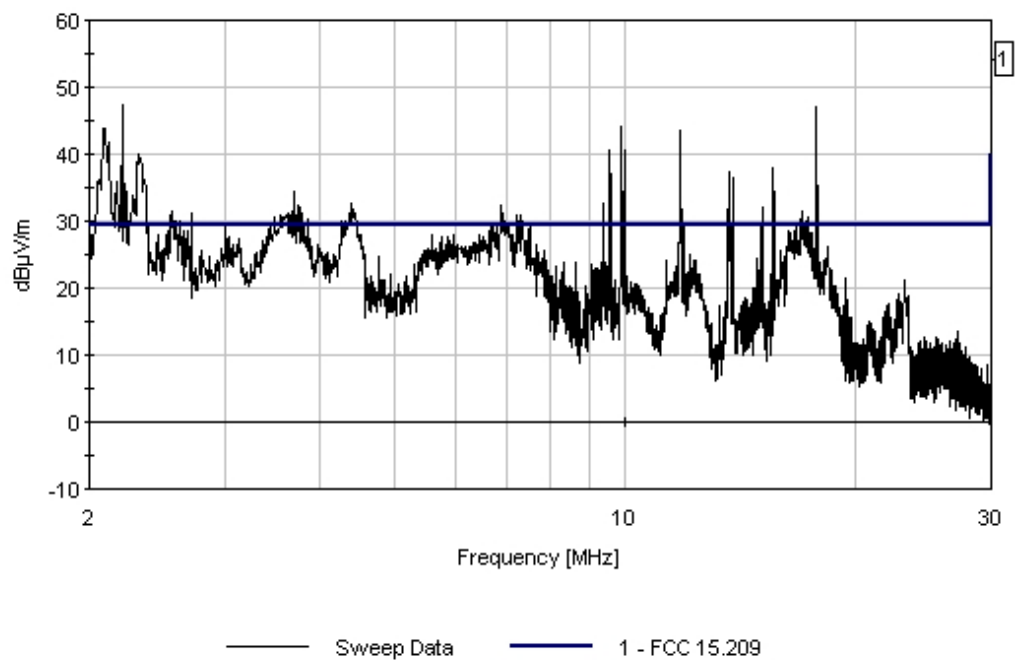

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 14:12:40
 Sequence#: 436
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	18.124M	28.1	+0.2	+0.3	+8.3	-12.3	+0.0	24.6	29.5	-4.9	Paral
2	17.034M	28.1	+0.2	+0.2	+8.4	-12.3	+0.0	24.6	29.5	-4.9	Paral
^	17.034M	30.8	+0.2	+0.2	+8.4	-12.3	+0.0	27.3	29.5	-2.2	Paral
4	4.462M	26.8	+0.1	+0.2	+9.2	-12.3	+0.0	24.0	29.5	-5.5	Paral
^	4.462M	31.7	+0.1	+0.2	+9.2	-12.3	+0.0	28.9	29.5	-0.6	Paral
6	3.330M	26.5	+0.1	+0.1	+9.3	-12.3	+0.0	23.7	29.5	-5.8	Paral

7	23.440M	28.0	+0.2	+0.3	+7.2	-12.3	+0.0	23.4	29.5	-6.1	Paral
QP											
^	23.440M	31.2	+0.2	+0.3	+7.2	-12.3	+0.0	26.6	29.5	-2.9	Paral
9	14.840M	26.7	+0.2	+0.2	+8.6	-12.3	+0.0	23.4	29.5	-6.1	Paral
10	7.040M	26.0	+0.1	+0.2	+9.2	-12.3	+0.0	23.2	29.5	-6.3	Paral
11	7.505M	25.2	+0.1	+0.2	+9.1	-12.3	+0.0	22.3	29.5	-7.2	Paral
12	8.500M	24.9	+0.1	+0.2	+9.1	-12.3	+0.0	22.0	29.5	-7.5	Paral
13	21.025M	22.3	+0.2	+0.3	+7.8	-12.3	+0.0	18.3	29.5	-11.2	Paral
14	11.420M	20.0	+0.1	+0.2	+8.9	-12.3	+0.0	16.9	29.5	-12.6	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 14:12:40 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 436 Parallel
Overhead Test Site 3 Position 2 Medium Lines only. Notches off. MODE 1/2. Formal Power

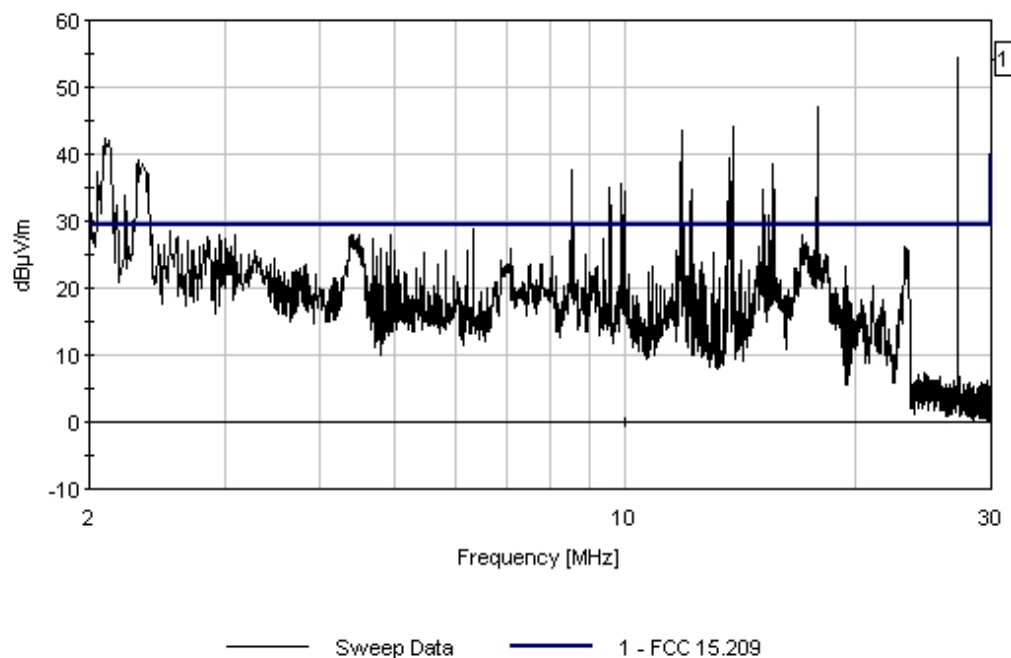

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 14:17:56
Sequence#: 437
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.598M	30.2	+0.1	+0.2	+9.3	-12.3	+0.0	27.4	29.5	-2.1	Perpe
QP											
^	3.598M	33.0	+0.1	+0.2	+9.3	-12.3	+0.0	30.3	29.5	+0.8	Perpe
3	4.377M	29.8	+0.1	+0.2	+9.2	-12.3	+0.0	27.0	29.5	-2.5	Perpe
QP											
^	4.377M	32.9	+0.1	+0.2	+9.2	-12.3	+0.0	30.1	29.5	+0.6	Perpe
5	6.908M	29.2	+0.1	+0.2	+9.2	-12.3	+0.0	26.3	29.5	-3.2	Perpe
QP											
^	6.908M	33.7	+0.1	+0.2	+9.2	-12.3	+0.0	30.9	29.5	+1.4	Perpe

7	7.549M	28.1	+0.1	+0.2	+9.1	-12.3	+0.0	25.2	29.5	-4.3	Perpe
8	17.150M	28.1	+0.2	+0.2	+8.4	-12.3	+0.0	24.6	29.5	-4.9	Perpe
9	11.408M	26.0	+0.1	+0.2	+8.9	-12.3	+0.0	22.9	29.5	-6.6	Perpe
QP											
^	11.408M	29.4	+0.1	+0.2	+8.9	-12.3	+0.0	26.3	29.5	-3.2	Perpe
11	23.463M	26.8	+0.2	+0.3	+7.2	-12.3	+0.0	22.2	29.5	-7.3	Perpe
12	18.290M	25.4	+0.2	+0.3	+8.3	-12.3	+0.0	21.9	29.5	-7.6	Perpe
13	15.290M	24.8	+0.2	+0.2	+8.6	-12.3	+0.0	21.5	29.5	-8.0	Perpe
14	6.245M	24.4	+0.1	+0.1	+9.2	-12.3	+0.0	21.5	29.5	-8.0	Perpe
15	22.663M	23.3	+0.2	+0.3	+7.4	-12.3	+0.0	18.9	29.5	-10.6	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 14:17:56 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 437 Perpendicular
Overhead Test Site 3 Position 2 Medium Lines only. Notches off. MODE 1/2. Formal Power

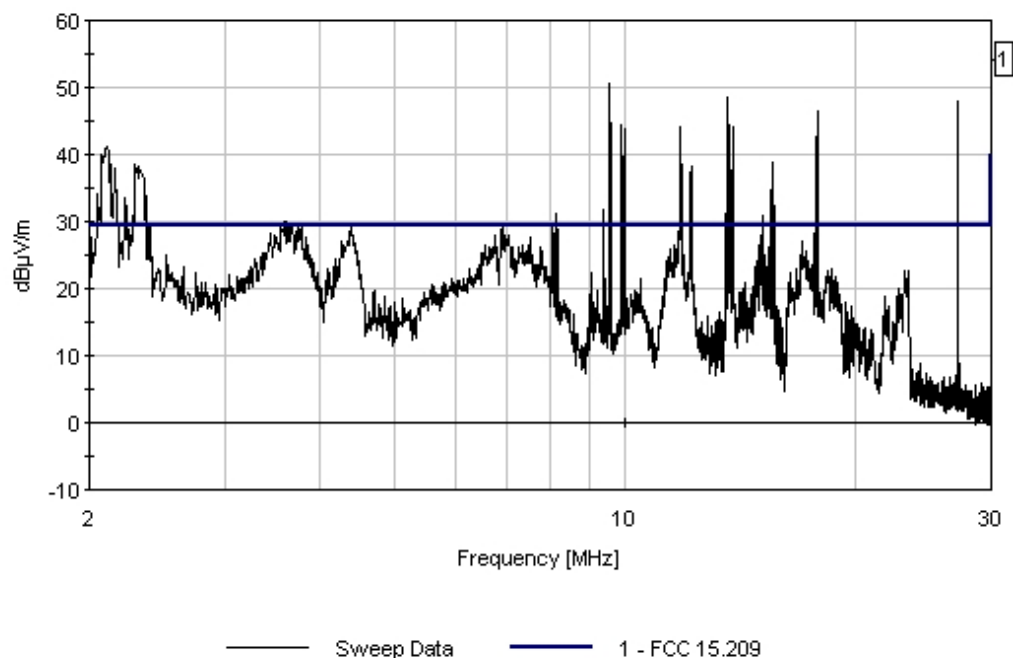

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 13:59:56
 Sequence#: 434
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.593M	29.5	+0.1	+0.2	+9.3	-12.3	+0.0	26.8	29.5	-2.7	Perpe
2	7.505M	27.4	+0.1	+0.2	+9.1	-12.3	+0.0	24.5	29.5	-5.0	Perpe
3	6.915M	27.2	+0.1	+0.2	+9.2	-12.3	+0.0	24.4	29.5	-5.1	Perpe
4	11.410M	26.3	+0.1	+0.2	+8.9	-12.3	+0.0	23.2	29.5	-6.3	Perpe
5	4.261M	25.6	+0.1	+0.2	+9.2	-12.3	+0.0	22.8	29.5	-6.7	Perpe
6	16.985M	25.8	+0.2	+0.2	+8.4	-12.3	+0.0	22.3	29.5	-7.2	Perpe

7	12.285M	24.6	+0.2	+0.2	+8.8	-12.3	+0.0	21.5	29.5	-8.0	Perpe
8	15.200M	24.1	+0.2	+0.2	+8.6	-12.3	+0.0	20.8	29.5	-8.7	Perpe
9	10.310M	20.9	+0.1	+0.2	+9.1	-12.3	+0.0	18.0	29.5	-11.5	Perpe
10	16.055M	21.0	+0.2	+0.2	+8.5	-12.3	+0.0	17.6	29.5	-11.9	Perpe
11	18.935M	21.0	+0.2	+0.3	+8.2	-12.3	+0.0	17.4	29.5	-12.1	Perpe
12	8.275M	20.3	+0.1	+0.2	+9.1	-12.3	+0.0	17.3	29.5	-12.2	Perpe
13	22.675M	21.6	+0.2	+0.3	+7.4	-12.3	+0.0	17.2	29.5	-12.3	Perpe
14	23.113M	21.1	+0.2	+0.3	+7.3	-12.3	+0.0	16.6	29.5	-12.9	Perpe
15	20.600M	18.5	+0.2	+0.3	+7.9	-12.3	+0.0	14.6	29.5	-14.9	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 13:59:56 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 434 Perpendicular
Overhead Test Site 3 Position 3 Medium Lines only. Notches off. MODE 1/2. Formal Power

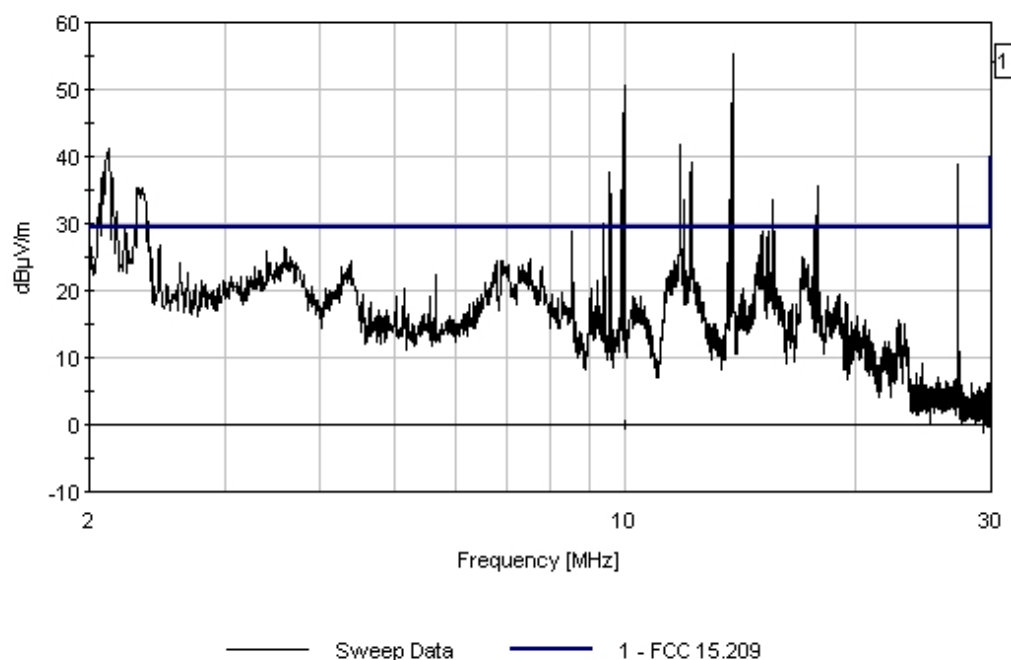

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 14:05:46
 Sequence#: 435
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.033M	30.2	+0.2	+0.2	+8.4	-12.3	+0.0	26.7	29.5	-2.8	Paral
QP											
^	17.033M	32.7	+0.2	+0.2	+8.4	-12.3	+0.0	29.2	29.5	-0.3	Paral
3	23.080M	30.0	+0.2	+0.3	+7.3	-12.3	+0.0	25.5	29.5	-4.0	Paral
4	22.816M	29.4	+0.2	+0.3	+7.4	-12.3	+0.0	25.0	29.5	-4.5	Paral
5	15.740M	27.9	+0.2	+0.2	+8.5	-12.3	+0.0	24.5	29.5	-5.0	Paral
6	4.377M	27.3	+0.1	+0.2	+9.2	-12.3	+0.0	24.5	29.5	-5.0	Paral
QP											
^	4.377M	30.5	+0.1	+0.2	+9.2	-12.3	+0.0	27.7	29.5	-1.8	Paral

8	18.331M	26.5	+0.2	+0.3	+8.3	-12.3	+0.0	23.0	29.5	-6.5	Paral
9	14.975M	25.8	+0.2	+0.2	+8.6	-12.3	+0.0	22.5	29.5	-7.0	Paral
10	19.325M	24.6	+0.2	+0.3	+8.2	-12.3	+0.0	21.0	29.5	-8.5	Paral
11	11.405M	22.5	+0.1	+0.2	+8.9	-12.3	+0.0	19.4	29.5	-10.1	Paral
12	6.885M	22.1	+0.1	+0.2	+9.2	-12.3	+0.0	19.3	29.5	-10.2	Paral
13	12.600M	22.0	+0.2	+0.2	+8.8	-12.3	+0.0	18.9	29.5	-10.6	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 14:05:46 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 435 Parallel
Overhead Test Site 3 Position 3 Medium Lines only. Notches off. MODE 1/2. Formal Power

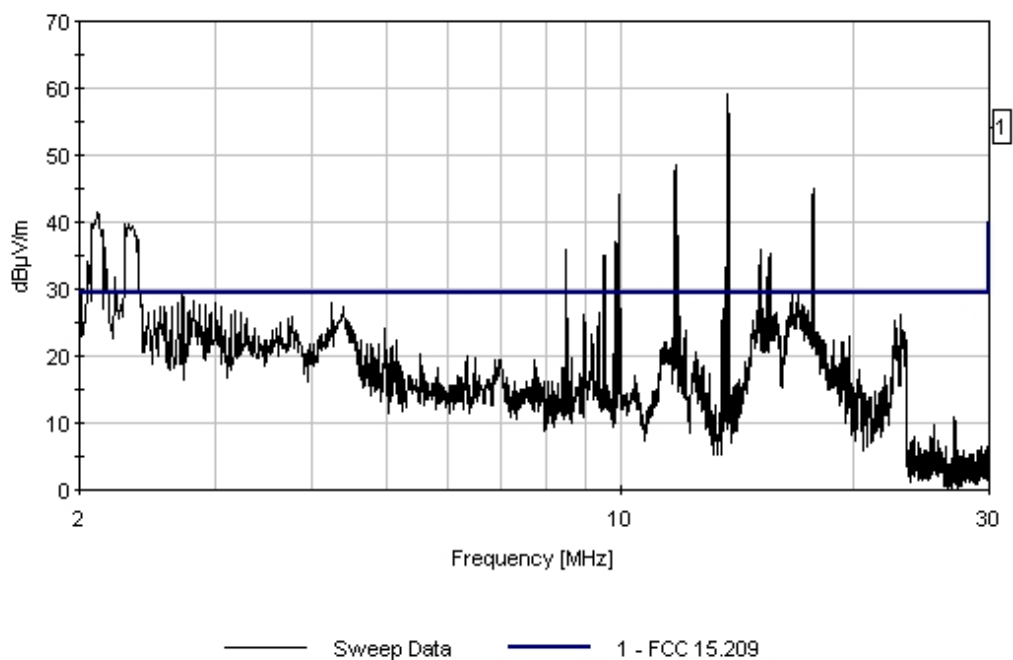

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: **Corinex**
Model: **MV Gateway**
S/N: **ENG2**

Date: 3/31/2006
Time: 13:50:51
Sequence#: 432
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	4.381M	30.4	+0.1	+0.2	+9.2	-12.3	+0.0	27.6	29.5	-1.9	Paral
QP											
^	4.381M	32.4	+0.1	+0.2	+9.2	-12.3	+0.0	29.6	29.5	+0.1	Paral
3	17.028M	28.6	+0.2	+0.2	+8.4	-12.3	+0.0	25.1	29.5	-4.4	Paral
QP											
^	17.028M	31.6	+0.2	+0.2	+8.4	-12.3	+0.0	28.1	29.5	-1.4	Paral
5	3.595M	26.1	+0.1	+0.2	+9.3	-12.3	+0.0	23.4	29.5	-6.1	Paral
QP											
^	3.595M	30.7	+0.1	+0.2	+9.3	-12.3	+0.0	27.9	29.5	-1.6	Paral

7	23.450M	27.0	+0.2	+0.3	+7.2	-12.3	+0.0	22.4	29.5	-7.1	Paral
8	18.202M	25.7	+0.2	+0.3	+8.3	-12.3	+0.0	22.2	29.5	-7.3	Paral
9	11.438M	24.7	+0.1	+0.2	+8.9	-12.3	+0.0	21.6	29.5	-7.9	Paral
10	7.500M	24.1	+0.1	+0.2	+9.1	-12.3	+0.0	21.2	29.5	-8.3	Paral
QP											
^	7.500M	28.6	+0.1	+0.2	+9.1	-12.3	+0.0	25.7	29.5	-3.8	Paral
12	14.990M	23.0	+0.2	+0.2	+8.6	-12.3	+0.0	19.7	29.5	-9.8	Paral
13	21.738M	23.7	+0.2	+0.3	+7.7	-12.3	+0.0	19.6	29.5	-9.9	Paral
14	8.285M	20.1	+0.1	+0.2	+9.1	-12.3	+0.0	17.2	29.5	-12.3	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 13:50:51 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 432 Parallel
Overhead Test Site 3 Position 4 Medium Lines only. Notches off. MODE 1/2. Formal Power

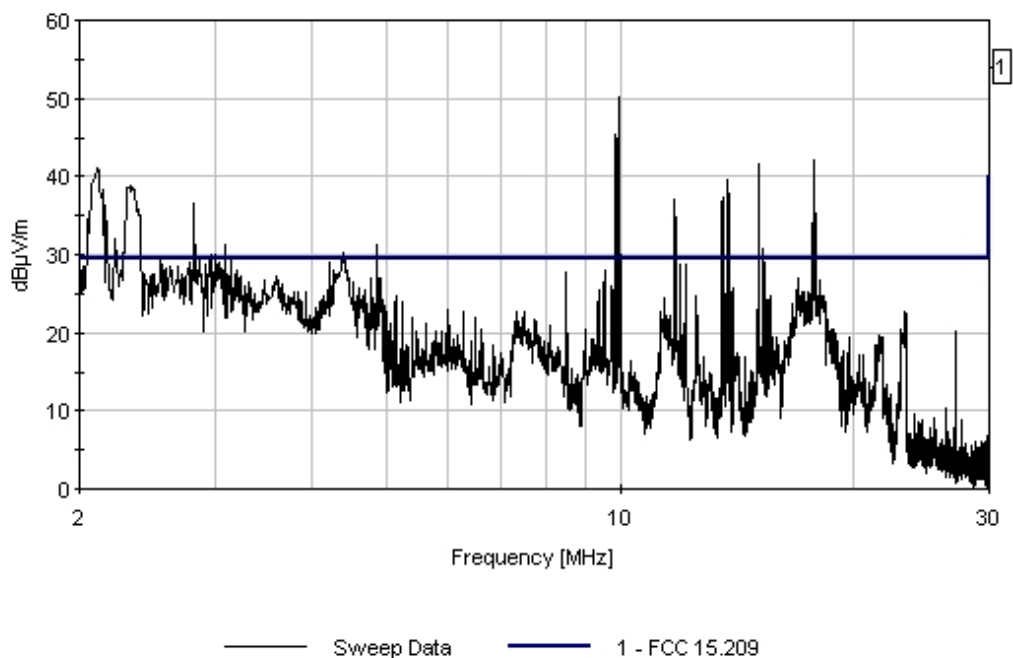

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 13:54:57
 Sequence#: 433
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.112M	30.8	+0.2	+0.2	+8.6	-12.3	+0.0	27.5	29.5	-2.0	Perpe
QP											
^	15.112M	36.9	+0.2	+0.2	+8.6	-12.3	+0.0	33.6	29.5	+4.1	Perpe
3	15.771M	26.4	+0.2	+0.2	+8.5	-12.3	+0.0	23.0	29.5	-6.5	Perpe
4	16.407M	26.2	+0.2	+0.2	+8.4	-12.3	+0.0	22.7	29.5	-6.8	Perpe
5	17.372M	26.1	+0.2	+0.3	+8.3	-12.3	+0.0	22.6	29.5	-6.9	Perpe
6	3.605M	23.9	+0.1	+0.2	+9.3	-12.3	+0.0	21.2	29.5	-8.3	Perpe

7	12.245M	23.7	+0.1	+0.2	+8.9	-12.3	+0.0	20.6	29.5	-8.9	Perpe
8	11.435M	23.6	+0.1	+0.2	+8.9	-12.3	+0.0	20.5	29.5	-9.0	Perpe
9	7.380M	21.0	+0.1	+0.2	+9.2	-12.3	+0.0	18.2	29.5	-11.3	Perpe
10	19.083M	19.3	+0.2	+0.3	+8.2	-12.3	+0.0	15.7	29.5	-13.8	Perpe
11	10.590M	16.2	+0.1	+0.2	+9.0	-12.3	+0.0	13.2	29.5	-16.3	Perpe
12	21.738M	16.0	+0.2	+0.3	+7.7	-12.3	+0.0	11.9	29.5	-17.6	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 13:54:57 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 433 Perpendicular
Overhead Test Site 3 Position 4 Medium Lines only. Notches off. MODE 1/2. Formal Power

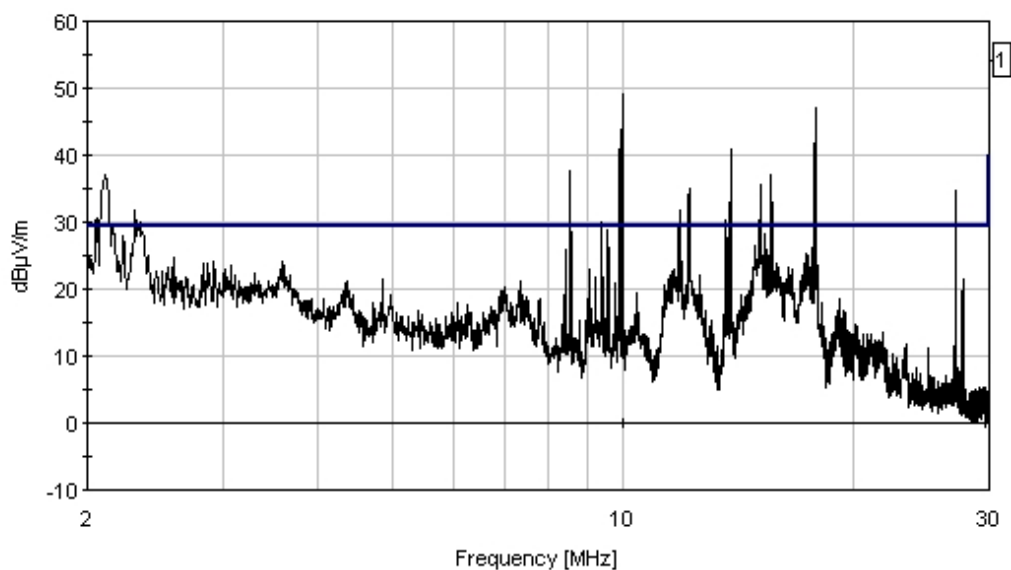

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 13:37:30
 Sequence#: 430
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.180M	26.9	+0.2	+0.2	+8.4	-12.3	+0.0	23.4	29.5	-6.1	Perpe
2	14.870M	26.7	+0.2	+0.2	+8.6	-12.3	+0.0	23.4	29.5	-6.1	Perpe
3	15.935M	26.6	+0.2	+0.2	+8.5	-12.3	+0.0	23.2	29.5	-6.3	Perpe
4	4.365M	24.7	+0.1	+0.2	+9.2	-12.3	+0.0	21.9	29.5	-7.6	Perpe
5	7.495M	23.4	+0.1	+0.2	+9.1	-12.3	+0.0	20.5	29.5	-9.0	Perpe
6	11.558M	22.1	+0.1	+0.2	+8.9	-12.3	+0.0	19.0	29.5	-10.5	Perpe

7	3.578M	21.4	+0.1	+0.2	+9.3	-12.3	+0.0	18.7	29.5	-10.8	Perpe
8	23.088M	22.9	+0.2	+0.3	+7.3	-12.3	+0.0	18.4	29.5	-11.1	Perpe
9	22.663M	21.4	+0.2	+0.3	+7.4	-12.3	+0.0	17.0	29.5	-12.5	Perpe
10	12.415M	19.8	+0.2	+0.2	+8.8	-12.3	+0.0	16.7	29.5	-12.8	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 13:37:30 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 430 Perpendicular
Overhead Test Site 3 Position 5 Medium Lines only. Notches off. MODE 1/2. Formal Power

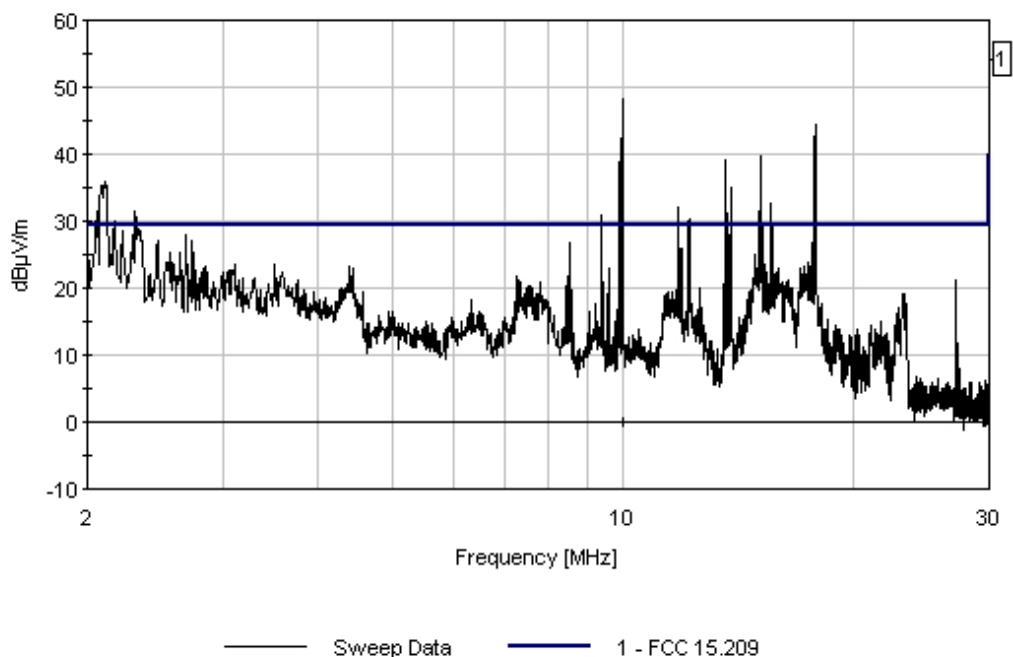

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 13:43:42
 Sequence#: 431
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	4.374M	29.6	+0.1	+0.2	+9.2	-12.3	+0.0	26.8	29.5	-2.7	Paral
QP											
^	4.374M	32.9	+0.1	+0.2	+9.2	-12.3	+0.0	30.1	29.5	+0.6	Paral
3	3.592M	27.6	+0.1	+0.2	+9.3	-12.3	+0.0	24.9	29.5	-4.6	Paral
QP											
^	3.592M	31.7	+0.1	+0.2	+9.3	-12.3	+0.0	29.0	29.5	-0.5	Paral
5	7.500M	24.9	+0.1	+0.2	+9.1	-12.3	+0.0	22.0	29.5	-7.5	Paral
QP											
^	7.500M	29.3	+0.1	+0.2	+9.1	-12.3	+0.0	26.4	29.5	-3.1	Paral

7	22.675M	25.9	+0.2	+0.3	+7.4	-12.3	+0.0	21.5	29.5	-8.0	Paral
8	16.340M	24.0	+0.2	+0.2	+8.5	-12.3	+0.0	20.6	29.5	-8.9	Paral
9	23.088M	24.4	+0.2	+0.3	+7.3	-12.3	+0.0	19.9	29.5	-9.6	Paral
10	5.485M	22.5	+0.1	+0.1	+9.2	-12.3	+0.0	19.6	29.5	-9.9	Paral
11	18.305M	22.9	+0.2	+0.3	+8.3	-12.3	+0.0	19.4	29.5	-10.1	Paral
12	15.740M	22.7	+0.2	+0.2	+8.5	-12.3	+0.0	19.2	29.5	-10.3	Paral
13	8.415M	21.1	+0.1	+0.2	+9.1	-12.3	+0.0	18.2	29.5	-11.3	Paral
14	11.455M	21.2	+0.1	+0.2	+8.9	-12.3	+0.0	18.1	29.5	-11.4	Paral
15	12.495M	20.2	+0.2	+0.2	+8.8	-12.3	+0.0	17.1	29.5	-12.4	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 13:43:42 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 431 Parallel
Overhead Test Site 3 Position 5 Medium Lines only. Notches off. MODE 1/2. Formal Power

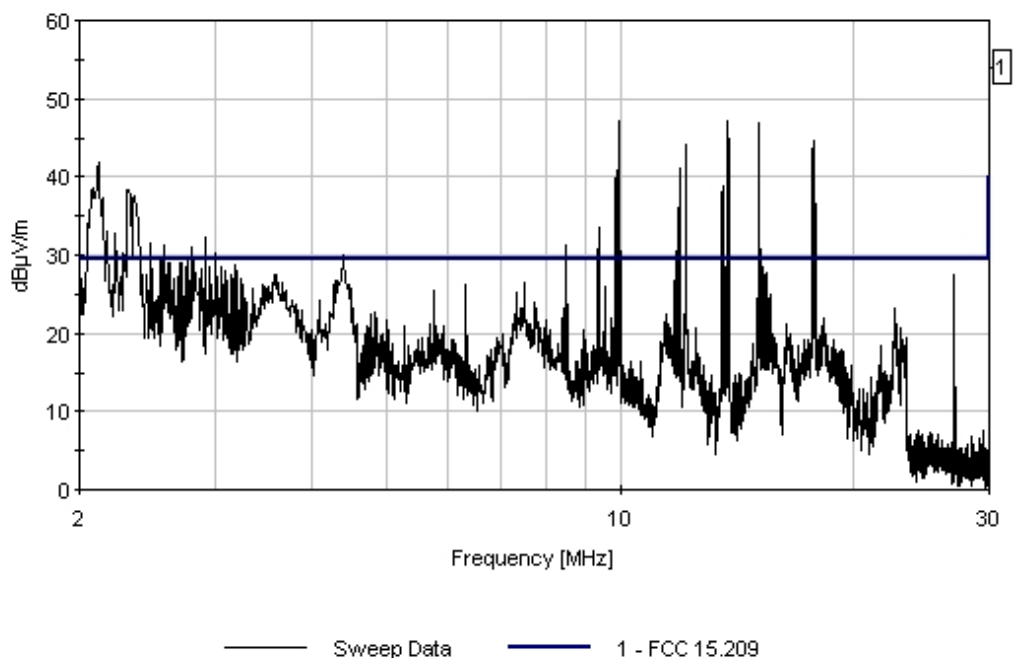

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 12:52:12
 Sequence#: 428
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.595M	29.5	+0.1	+0.2	+9.3	-12.3	+0.0	26.8	29.5	-2.7	Paral
QP											
^	3.595M	34.7	+0.1	+0.2	+9.3	-12.3	+0.0	32.0	29.5	+2.5	Paral
3	16.565M	26.8	+0.2	+0.2	+8.4	-12.3	+0.0	23.3	29.5	-6.2	Paral
QP											
^	16.565M	29.9	+0.2	+0.2	+8.4	-12.3	+0.0	26.4	29.5	-3.1	Paral
5	6.973M	25.5	+0.1	+0.2	+9.2	-12.3	+0.0	22.7	29.5	-6.8	Paral
6	23.313M	26.7	+0.2	+0.3	+7.3	-12.3	+0.0	22.2	29.5	-7.3	Paral

7	4.373M	25.0	+0.1	+0.2	+9.2	-12.3	+0.0	22.2	29.5	-7.3	Paral
QP	4.373M	29.0	+0.1	+0.2	+9.2	-12.3	+0.0	26.2	29.5	-3.3	Paral
9	14.810M	23.7	+0.2	+0.2	+8.6	-12.3	+0.0	20.4	29.5	-9.1	Paral
10	18.360M	22.5	+0.2	+0.3	+8.2	-12.3	+0.0	18.9	29.5	-10.6	Paral
11	12.485M	21.7	+0.2	+0.2	+8.8	-12.3	+0.0	18.6	29.5	-10.9	Paral
12	21.350M	20.6	+0.2	+0.3	+7.7	-12.3	+0.0	16.5	29.5	-13.0	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 12:52:12 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 428 Parallel
Overhead Test Site 3 Position 6 Medium Lines only. Notches off. MODE 1/2. Formal Power

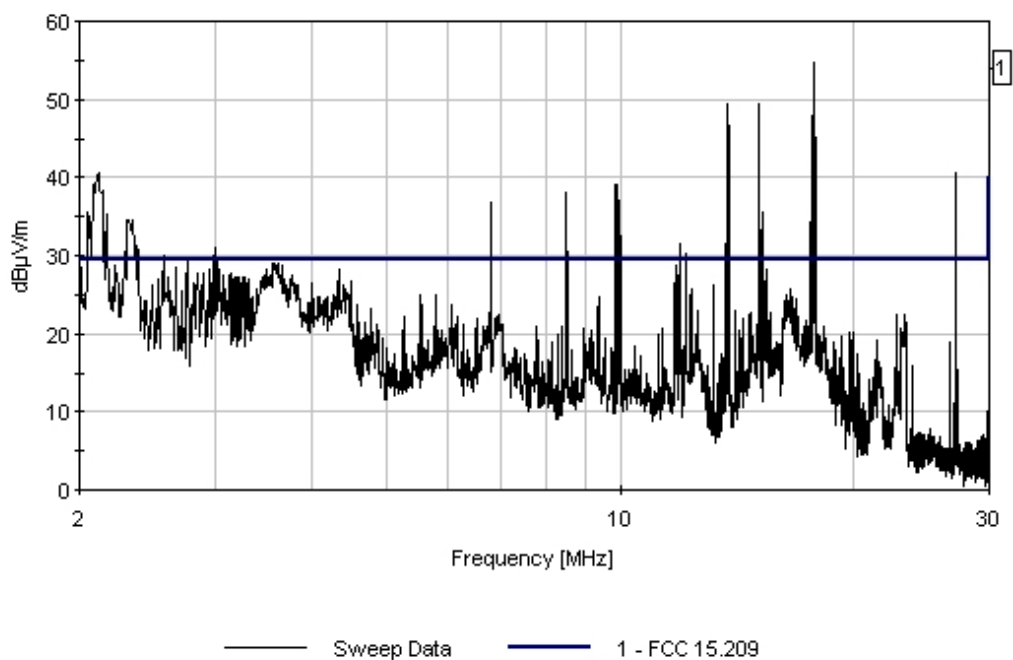

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 13:28:10
 Sequence#: 429
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	6.561M	25.2	+0.1	+0.2	+9.2	-12.3	+0.0	22.4	29.5	-7.1	Perpe
2	7.500M	23.8	+0.1	+0.2	+9.1	-12.3	+0.0	20.9	29.5	-8.6	Perpe
QP	7.500M	28.7	+0.1	+0.2	+9.1	-12.3	+0.0	25.8	29.5	-3.7	Perpe
4	8.440M	21.7	+0.1	+0.2	+9.1	-12.3	+0.0	18.8	29.5	-10.7	Perpe
5	19.730M	20.7	+0.2	+0.3	+8.1	-12.3	+0.0	17.0	29.5	-12.5	Perpe
6	16.370M	19.3	+0.2	+0.2	+8.4	-12.3	+0.0	15.8	29.5	-13.7	Perpe

7	23.113M	20.0	+0.2	+0.3	+7.3	-12.3	+0.0	15.5	29.5	-14.0	Perpe
8	17.450M	17.8	+0.2	+0.3	+8.3	-12.3	+0.0	14.3	29.5	-15.2	Perpe
9	14.855M	15.6	+0.2	+0.2	+8.6	-12.3	+0.0	12.3	29.5	-17.2	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 13:28:10 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 429 Perpendicular
Overhead Test Site 3 Position 6 Medium Lines only. Notches off. MODE 1/2. Formal Power

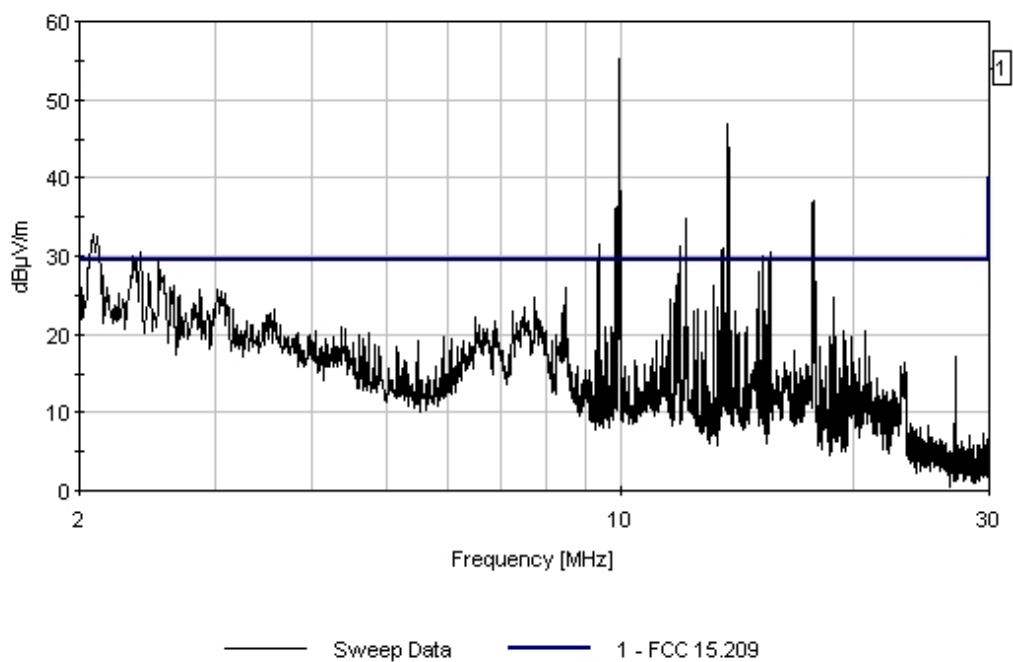

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 12:35:56
 Sequence#: 426
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	6.738M	28.2	+0.1	+0.2	+9.2	-12.3	+0.0	25.4	29.5	-4.1	Perpe
QP											
^	6.738M	32.0	+0.1	+0.2	+9.2	-12.3	+0.0	29.2	29.5	-0.3	Perpe
3	7.500M	26.5	+0.1	+0.2	+9.1	-12.3	+0.0	23.6	29.5	-5.9	Perpe
QP											
^	7.500M	30.6	+0.1	+0.2	+9.1	-12.3	+0.0	27.7	29.5	-1.8	Perpe
5	18.140M	24.1	+0.2	+0.3	+8.3	-12.3	+0.0	20.6	29.5	-8.9	Perpe
6	3.520M	23.0	+0.1	+0.2	+9.3	-12.3	+0.0	20.3	29.5	-9.2	Perpe

7	21.463M	21.2	+0.2	+0.3	+7.7	-12.3	+0.0	17.1	29.5	-12.4	Perpe
8	8.277M	18.4	+0.1	+0.2	+9.1	-12.3	+0.0	15.5	29.5	-14.0	Perpe
9	15.815M	18.5	+0.2	+0.2	+8.5	-12.3	+0.0	15.1	29.5	-14.4	Perpe
10	12.345M	16.6	+0.2	+0.2	+8.8	-12.3	+0.0	13.5	29.5	-16.0	Perpe
11	23.350M	17.6	+0.2	+0.3	+7.3	-12.3	+0.0	13.1	29.5	-16.4	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 12:35:56 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 426 Perpendicular
Overhead Test Site 3 Position 7 Medium Lines only. Notches off. MODE 1/2. Formal Power

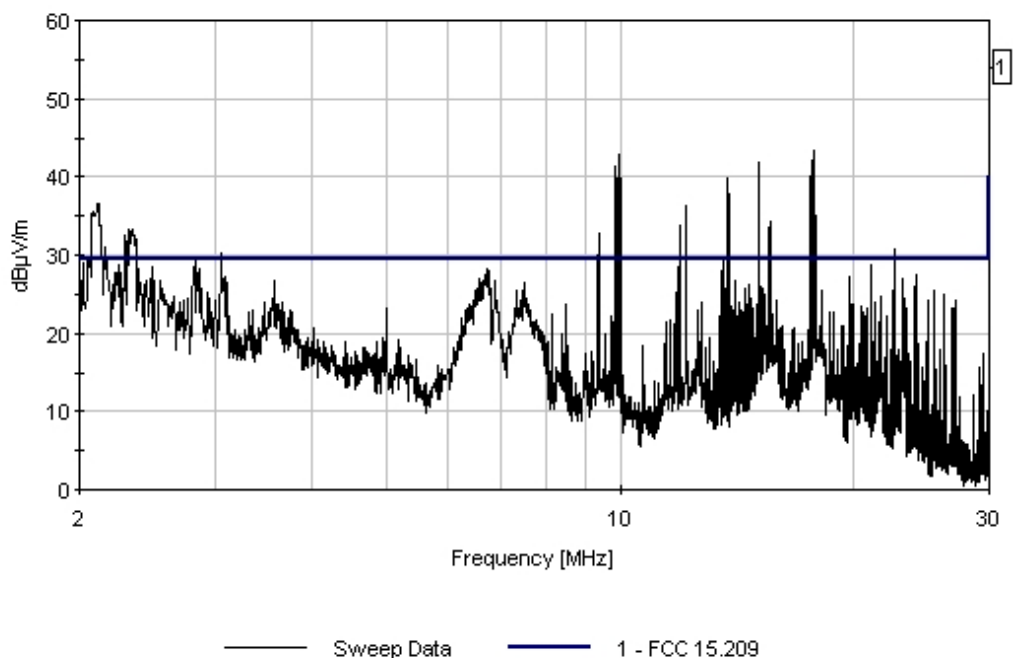

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 12:43:13
Sequence#: 427
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	4.377M	29.6	+0.1	+0.2	+9.2	-12.3	+0.0	26.7	29.5	-2.8	Paral
QP											
^	4.377M	33.1	+0.1	+0.2	+9.2	-12.3	+0.0	30.3	29.5	+0.8	Paral
3	3.605M	27.3	+0.1	+0.2	+9.3	-12.3	+0.0	24.5	29.5	-5.0	Paral
QP											
^	3.605M	31.1	+0.1	+0.2	+9.3	-12.3	+0.0	28.4	29.5	-1.1	Paral
5	7.500M	25.3	+0.1	+0.2	+9.1	-12.3	+0.0	22.4	29.5	-7.1	Paral
QP											
^	7.500M	29.5	+0.1	+0.2	+9.1	-12.3	+0.0	26.6	29.5	-2.9	Paral

7	12.388M	23.7	+0.2	+0.2	+8.8	-12.3	+0.0	20.6	29.5	-8.9	Paral
8	17.330M	23.6	+0.2	+0.3	+8.3	-12.3	+0.0	20.1	29.5	-9.4	Paral
9	18.365M	22.6	+0.2	+0.3	+8.2	-12.3	+0.0	19.0	29.5	-10.5	Paral
10	16.430M	22.5	+0.2	+0.2	+8.4	-12.3	+0.0	19.0	29.5	-10.5	Paral
11	19.310M	22.5	+0.2	+0.3	+8.2	-12.3	+0.0	18.9	29.5	-10.6	Paral
12	8.345M	21.0	+0.1	+0.2	+9.1	-12.3	+0.0	18.1	29.5	-11.4	Paral
13	23.525M	22.3	+0.2	+0.3	+7.2	-12.3	+0.0	17.7	29.5	-11.8	Paral
14	6.658M	20.4	+0.1	+0.2	+9.2	-12.3	+0.0	17.6	29.5	-11.9	Paral
15	21.575M	21.6	+0.2	+0.3	+7.7	-12.3	+0.0	17.5	29.5	-12.0	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 12:43:13 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 427 Parallel
Overhead Test Site 3 Position 7 Medium Lines only. Notches off. MODE 1/2. Formal Power

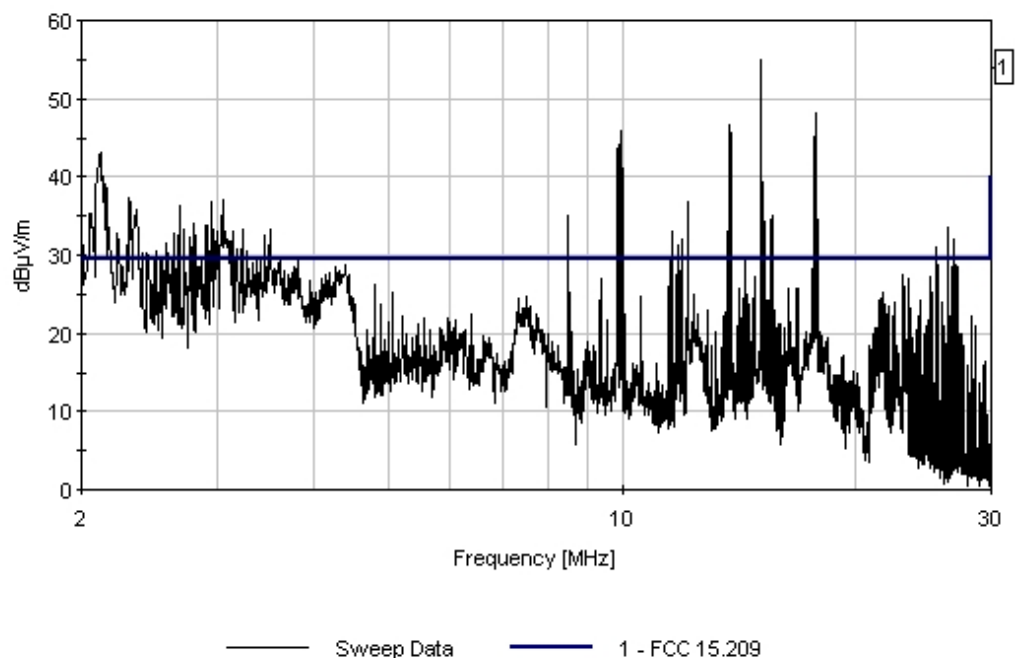

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 12:18:36
 Sequence#: 424
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	4.378M	30.8	+0.1	+0.2	+9.2	-12.3	+0.0	28.0	29.5	-1.5	Paral
QP											
^	4.378M	35.8	+0.1	+0.2	+9.2	-12.3	+0.0	33.0	29.5	+3.5	Paral
3	6.578M	27.6	+0.1	+0.2	+9.2	-12.3	+0.0	24.8	29.5	-4.7	Paral
4	3.355M	26.5	+0.1	+0.1	+9.3	-12.3	+0.0	23.7	29.5	-5.8	Paral
QP											
^	3.355M	30.1	+0.1	+0.1	+9.3	-12.3	+0.0	27.2	29.5	-2.3	Paral
6	17.045M	23.3	+0.2	+0.2	+8.4	-12.3	+0.0	19.8	29.5	-9.7	Paral

7	23.063M	23.8	+0.2	+0.3	+7.3	-12.3	+0.0	19.3	29.5	-10.2	Paral
8	14.990M	22.1	+0.2	+0.2	+8.6	-12.3	+0.0	18.8	29.5	-10.7	Paral
9	16.355M	21.9	+0.2	+0.2	+8.4	-12.3	+0.0	18.4	29.5	-11.1	Paral
10	11.265M	21.3	+0.1	+0.2	+9.0	-12.3	+0.0	18.3	29.5	-11.2	Paral
11	21.725M	22.2	+0.2	+0.3	+7.7	-12.3	+0.0	18.0	29.5	-11.5	Paral
12	12.480M	20.8	+0.2	+0.2	+8.8	-12.3	+0.0	17.7	29.5	-11.8	Paral
13	19.325M	18.9	+0.2	+0.3	+8.2	-12.3	+0.0	15.3	29.5	-14.2	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 12:18:36 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 424 Parallel
Overhead Test Site 3 Position 8 Medium Lines only. Notches off. MODE 1/2. Formal Power

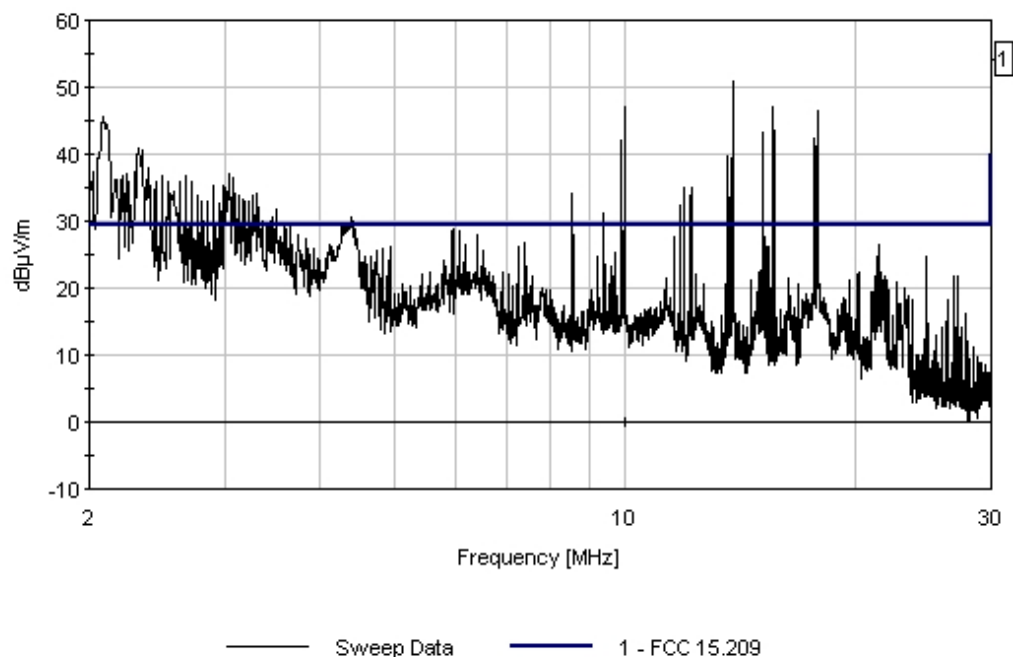

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 12:26:49
 Sequence#: 425
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.147M	25.7	+0.1	+0.1	+9.3	-12.3	+0.0	22.9	29.5	-6.6	Perpe
2	6.558M	25.3	+0.1	+0.2	+9.2	-12.3	+0.0	22.5	29.5	-7.0	Perpe
QP	6.558M	29.1	+0.1	+0.2	+9.2	-12.3	+0.0	26.3	29.5	-3.2	Perpe
4	15.485M	22.0	+0.2	+0.2	+8.5	-12.3	+0.0	18.6	29.5	-10.9	Perpe
5	19.325M	20.9	+0.2	+0.3	+8.2	-12.3	+0.0	17.3	29.5	-12.2	Perpe

6	7.380M	20.0	+0.1	+0.2	+9.2	-12.3	+0.0	17.2	29.5	-12.3	Perpe
7	17.015M	19.4	+0.2	+0.2	+8.4	-12.3	+0.0	15.9	29.5	-13.6	Perpe
8	21.569M	16.6	+0.2	+0.3	+7.7	-12.3	+0.0	12.4	29.5	-17.1	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 12:26:49 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 425 Perpendicular
Overhead Test Site 3 Position 8 Medium Lines only. Notches off. MODE 1/2. Formal Power

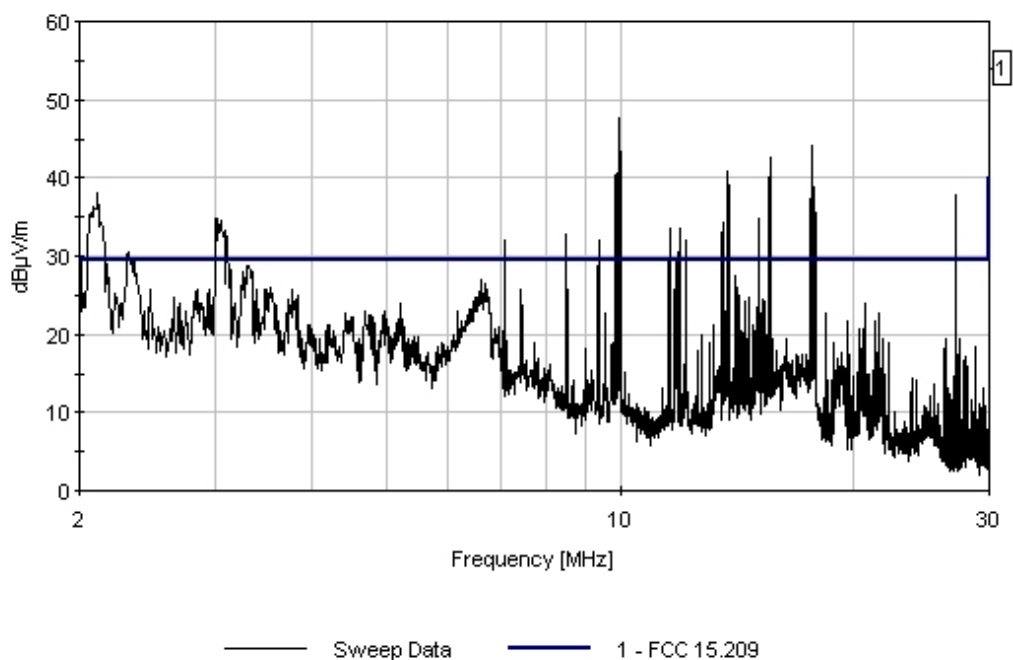

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 12:03:56
 Sequence#: 422
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.055M	25.7	+0.1	+0.1	+9.3	-12.3	+0.0	22.8	29.5	-6.7	Perpe
QP											
^	3.055M	31.1	+0.1	+0.1	+9.3	-12.3	+0.0	28.3	29.5	-1.2	Perpe
3	15.990M	18.5	+0.2	+0.2	+8.5	-12.3	+0.0	15.1	29.5	-14.4	Perpe
4	14.610M	16.9	+0.2	+0.2	+8.6	-12.3	+0.0	13.6	29.5	-15.9	Perpe
5	22.388M	11.3	+0.2	+0.3	+7.5	-12.3	+0.0	7.0	29.5	-22.5	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 12:03:56 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 422 Perpendicular
 Overhead Test Site 3 Position 9 Medium Lines only. Notches off. MODE 1/2. Formal Power

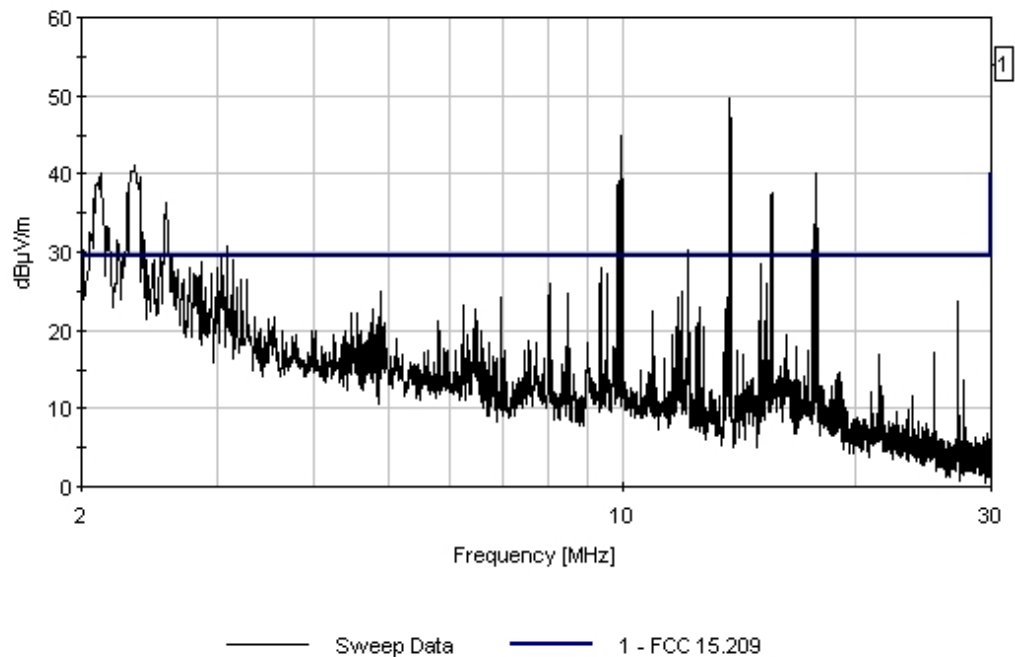

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 12:10:08
 Sequence#: 423
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	4.377M	26.9	+0.1	+0.2	+9.2	-12.3	+0.0	24.1	29.5	-5.4	Paral
QP											
^	4.377M	33.7	+0.1	+0.2	+9.2	-12.3	+0.0	30.9	29.5	+1.4	Paral
3	15.320M	26.3	+0.2	+0.2	+8.6	-12.3	+0.0	23.0	29.5	-6.5	Paral
4	6.732M	25.7	+0.1	+0.2	+9.2	-12.3	+0.0	22.8	29.5	-6.7	Paral
5	3.588M	23.7	+0.1	+0.2	+9.3	-12.3	+0.0	21.0	29.5	-8.5	Paral
6	16.280M	22.4	+0.2	+0.2	+8.5	-12.3	+0.0	19.0	29.5	-10.5	Paral

7	7.499M	21.1	+0.1	+0.2	+9.1	-12.3	+0.0	18.2	29.5	-11.3	Paral
QP											
^	7.499M	29.3	+0.1	+0.2	+9.1	-12.3	+0.0	26.4	29.5	-3.1	Paral
9	23.338M	22.5	+0.2	+0.3	+7.3	-12.3	+0.0	18.0	29.5	-11.5	Paral
10	17.975M	19.9	+0.2	+0.3	+8.3	-12.3	+0.0	16.4	29.5	-13.1	Paral
11	11.370M	17.6	+0.1	+0.2	+8.9	-12.3	+0.0	14.5	29.5	-15.0	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 12:10:08 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 423 Parallel
Overhead Test Site 3 Position 9 Medium Lines only. Notches off. MODE 1/2. Formal Power

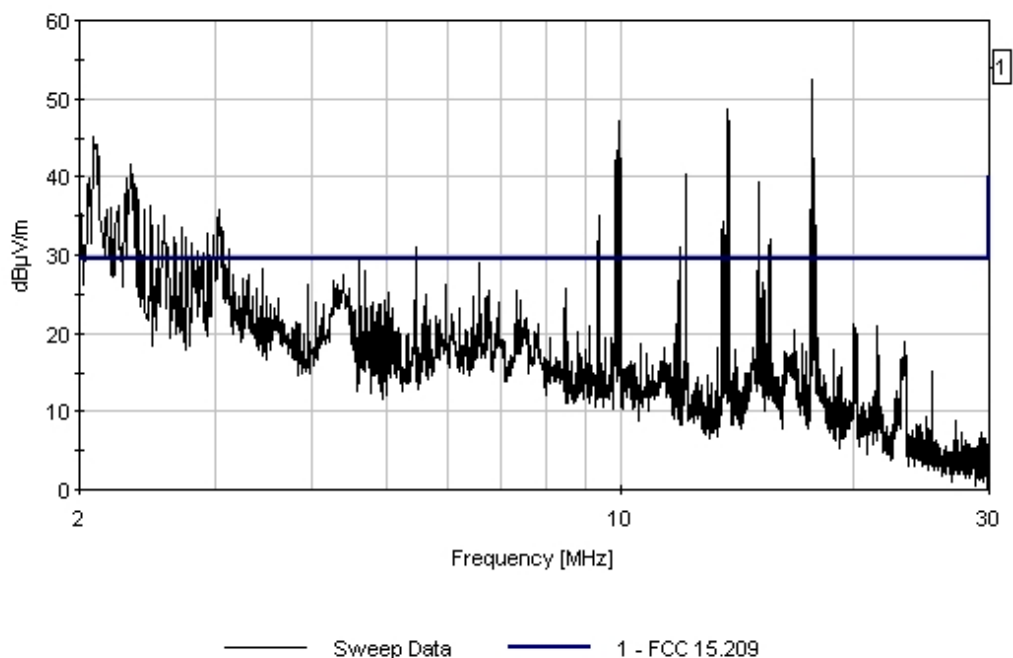

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 11:50:07
Sequence#: 420
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.505M	26.5	+0.1	+0.2	+9.3	-12.3	+0.0	23.8	29.5	-5.7	Paral
QP											
^	3.505M	32.0	+0.1	+0.2	+9.3	-12.3	+0.0	29.3	29.5	-0.2	Paral
3	6.279M	24.0	+0.1	+0.1	+9.2	-12.3	+0.0	21.1	29.5	-8.4	Paral
QP											
^	6.279M	29.9	+0.1	+0.1	+9.2	-12.3	+0.0	27.0	29.5	-2.5	Paral
5	11.299M	23.4	+0.1	+0.2	+8.9	-12.3	+0.0	20.3	29.5	-9.2	Paral
6	16.714M	23.4	+0.2	+0.2	+8.4	-12.3	+0.0	19.9	29.5	-9.6	Paral

7	7.769M	21.9	+0.1	+0.2	+9.1	-12.3	+0.0	19.0	29.5	-10.5	Paral
8	14.849M	19.9	+0.2	+0.2	+8.6	-12.3	+0.0	16.6	29.5	-12.9	Paral
9	15.964M	19.9	+0.2	+0.2	+8.5	-12.3	+0.0	16.5	29.5	-13.0	Paral
10	12.729M	18.0	+0.2	+0.2	+8.8	-12.3	+0.0	14.9	29.5	-14.6	Paral
11	23.363M	17.4	+0.2	+0.3	+7.3	-12.3	+0.0	12.9	29.5	-16.6	Paral
12	20.624M	15.1	+0.2	+0.3	+7.9	-12.3	+0.0	11.2	29.5	-18.3	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 11:50:07 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 420 Parallel
Overhead Test Site 3 Position 10 Medium Lines only. Notches off. MODE 1/2. Formal Power

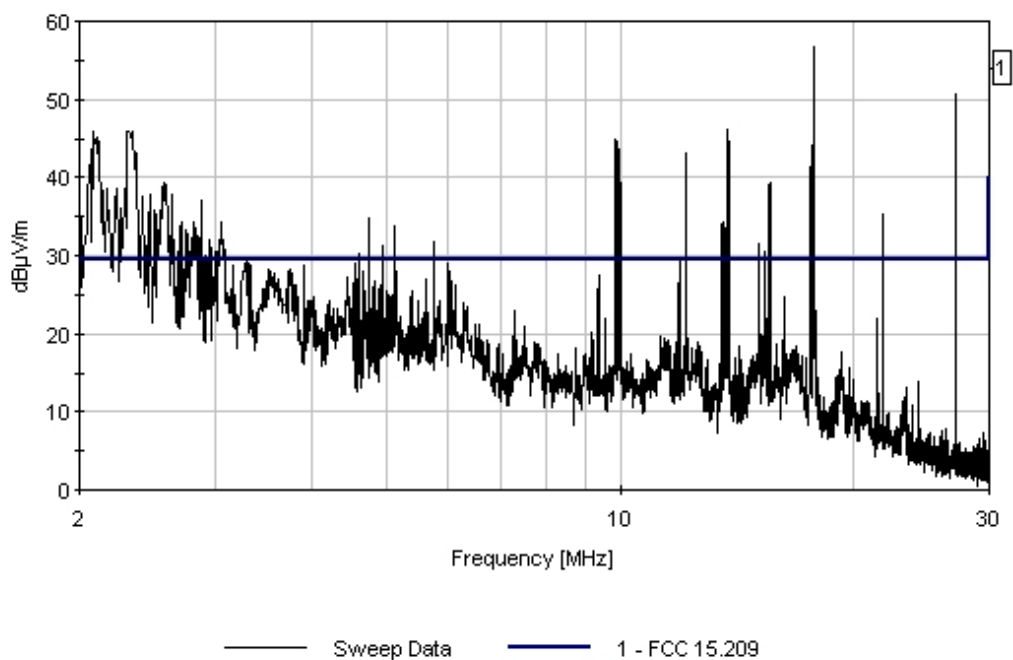

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**

Specification: **FCC 15.209**

Work Order #: **84818**

Test Type: **Radiated Scan**

Equipment: **BPL MV Gateway**

Manufacturer: **Corinex**

Model: **MV Gateway**

Date: 3/31/2006

Time: 11:58:34

Sequence#: 421

Tested By: C. Nicklas

S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.295M	26.2	+0.1	+0.1	+9.3	-12.3	+0.0	23.4	29.5	-6.1	Perpe
QP											
^	3.295M	33.5	+0.1	+0.1	+9.3	-12.3	+0.0	30.7	29.5	+1.2	Perpe
3	15.140M	20.8	+0.2	+0.2	+8.6	-12.3	+0.0	17.5	29.5	-12.0	Perpe
4	16.265M	20.2	+0.2	+0.2	+8.5	-12.3	+0.0	16.8	29.5	-12.7	Perpe
5	21.550M	20.1	+0.2	+0.3	+7.7	-12.3	+0.0	16.0	29.5	-13.5	Perpe
6	23.313M	19.1	+0.2	+0.3	+7.3	-12.3	+0.0	14.6	29.5	-14.9	Perpe
7	5.380M	17.2	+0.1	+0.1	+9.2	-12.3	+0.0	14.3	29.5	-15.2	Perpe
8	18.575M	16.2	+0.2	+0.3	+8.2	-12.3	+0.0	12.6	29.5	-16.9	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 11:58:34 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 421 Perpendicular
 Overhead Test Site 3 Position 10 Medium Lines only, Notches off, MODE 1/2, Formal Power

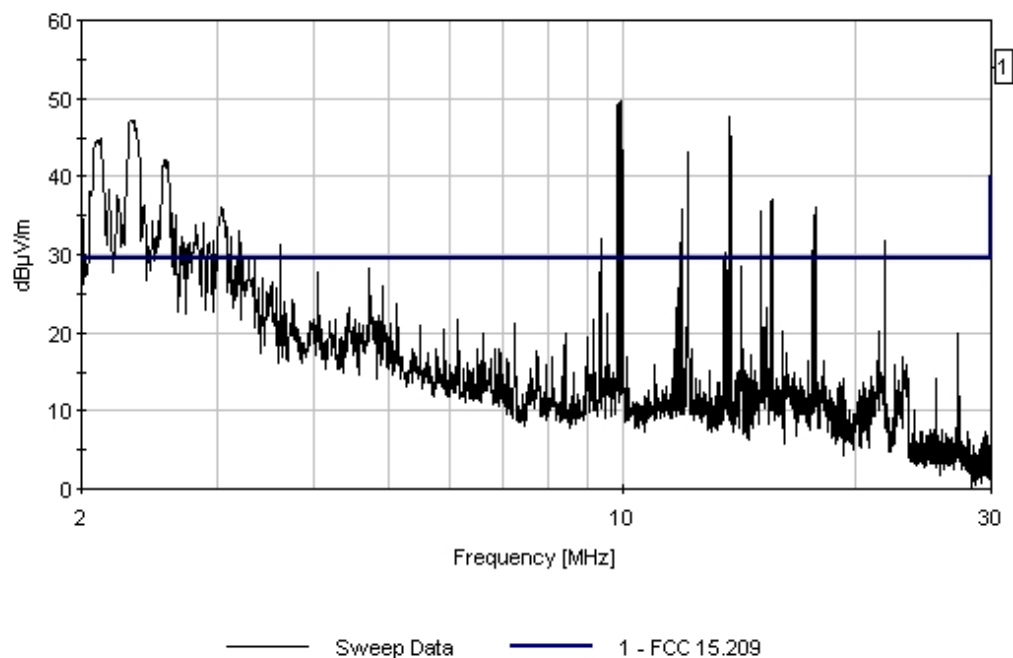

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •
 Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/31/2006
 Test Type: **Radiated Scan** Time: 11:32:50
 Equipment: **BPL MV Gateway** Sequence#: 418
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	6.405M	25.8	+0.1	+0.1	+9.2	-12.3	+0.0	22.9	29.5	-6.6	Perpe
2	4.080M	22.2	+0.1	+0.2	+9.2	-12.3	+0.0	19.4	29.5	-10.1	Perpe
3	8.170M	16.8	+0.1	+0.2	+9.1	-12.3	+0.0	13.9	29.5	-15.6	Perpe
4	21.400M	17.6	+0.2	+0.3	+7.7	-12.3	+0.0	13.4	29.5	-16.1	Perpe
5	12.355M	16.1	+0.2	+0.2	+8.8	-12.3	+0.0	13.0	29.5	-16.5	Perpe
6	16.552M	15.7	+0.2	+0.2	+8.4	-12.3	+0.0	12.2	29.5	-17.3	Perpe
7	23.438M	13.4	+0.2	+0.3	+7.2	-12.3	+0.0	8.8	29.5	-20.7	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 11:32:50 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 418 Perpendicular
 Overhead Test Site 3 Position 11 Medium Lines only, Notches off, MODE 1/2, Formal Power

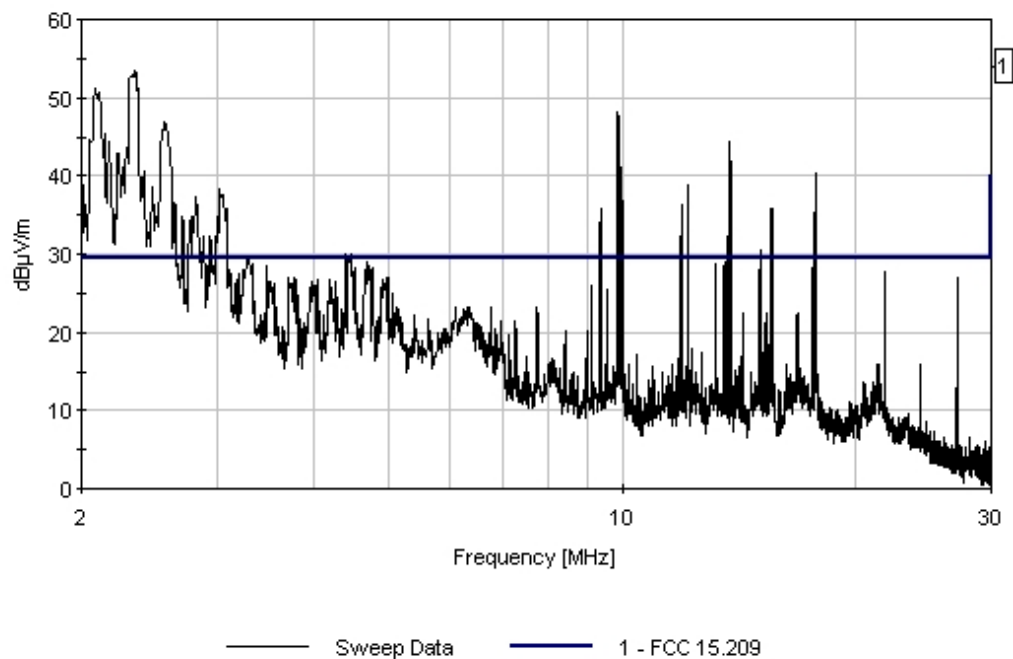

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 11:40:58
Sequence#: 419
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3.500M	28.8	+0.1	+0.2	+9.3	-12.3	+0.0	26.1	29.5	-3.4	Paral
QP											
^	3.500M	34.6	+0.1	+0.2	+9.3	-12.3	+0.0	31.9	29.5	+2.4	Paral
3	5.436M	24.1	+0.1	+0.1	+9.2	-12.3	+0.0	21.2	29.5	-8.3	Paral
4	6.571M	21.3	+0.1	+0.2	+9.2	-12.3	+0.0	18.5	29.5	-11.0	Paral
5	19.161M	20.1	+0.2	+0.3	+8.2	-12.3	+0.0	16.5	29.5	-13.0	Paral
6	16.961M	19.9	+0.2	+0.2	+8.4	-12.3	+0.0	16.4	29.5	-13.1	Paral

7	21.638M	19.9	+0.2	+0.3	+7.7	-12.3	+0.0	15.8	29.5	-13.7	Paral
8	14.891M	18.9	+0.2	+0.2	+8.6	-12.3	+0.0	15.6	29.5	-13.9	Paral
9	16.481M	18.7	+0.2	+0.2	+8.4	-12.3	+0.0	15.2	29.5	-14.3	Paral
10	20.650M	18.4	+0.2	+0.3	+7.9	-12.3	+0.0	14.5	29.5	-15.0	Paral
11	11.506M	17.6	+0.1	+0.2	+8.9	-12.3	+0.0	14.4	29.5	-15.1	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 11:40:58 Corinex WVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 419 Parallel
Overhead Test Site 3 Position 11 Medium Lines only. Notches off. MODE 1/2. Formal Power

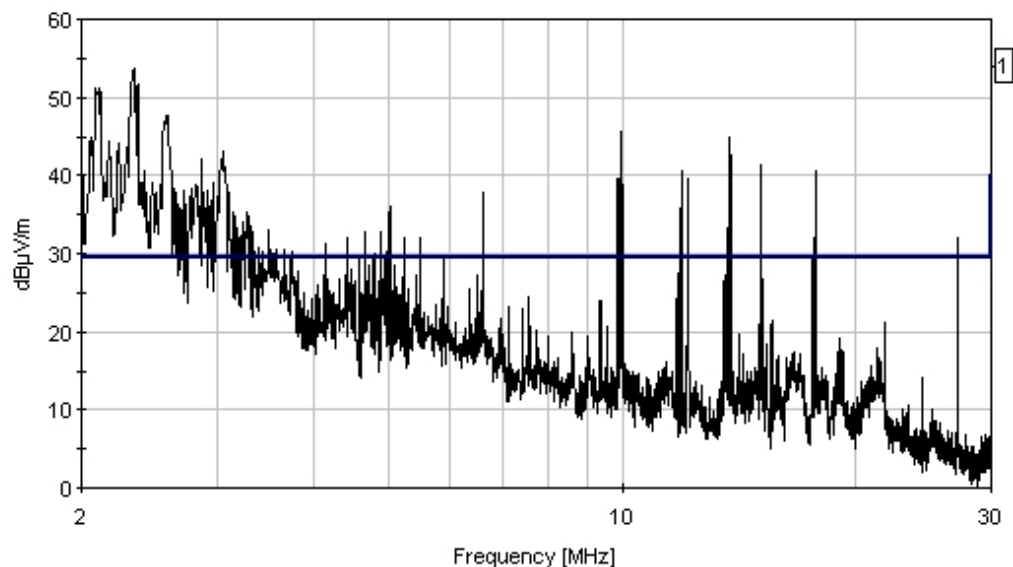

— Sweep Data — 1 - FCC 15.209

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 11:22:25
 Sequence#: 416
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	6.458M	27.9	+0.1	+0.1	+9.2	-12.3	+0.0	25.0	29.5	-4.5	Perpe
QP											
^	6.458M	31.6	+0.1	+0.1	+9.2	-12.3	+0.0	28.7	29.5	-0.8	Perpe
3	3.472M	27.6	+0.1	+0.2	+9.3	-12.3	+0.0	24.9	29.5	-4.6	Perpe
4	8.137M	25.3	+0.1	+0.2	+9.1	-12.3	+0.0	22.4	29.5	-7.1	Perpe
5	4.640M	21.6	+0.1	+0.1	+9.2	-12.3	+0.0	18.6	29.5	-10.9	Perpe
6	4.766M	19.8	+0.1	+0.1	+9.2	-12.3	+0.0	16.9	29.5	-12.6	Perpe

7	23.330M	21.1	+0.2	+0.3	+7.3	-12.3	+0.0	16.6	29.5	-12.9	Perpe
8	21.230M	19.3	+0.2	+0.3	+7.8	-12.3	+0.0	15.3	29.5	-14.2	Perpe
9	16.803M	17.6	+0.2	+0.2	+8.4	-12.3	+0.0	14.0	29.5	-15.5	Perpe
10	25.750M	12.6	+0.2	+0.3	+6.6	-12.3	+0.0	7.4	29.5	-22.1	Perpe
11	28.650M	11.3	+0.3	+0.3	+5.5	-12.3	+0.0	5.1	29.5	-24.4	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 11:22:25 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 416 Perpendicular
Overhead Test Site 3 Position 12 Medium Lines only. Notches off. MODE 1/2. Formal Power

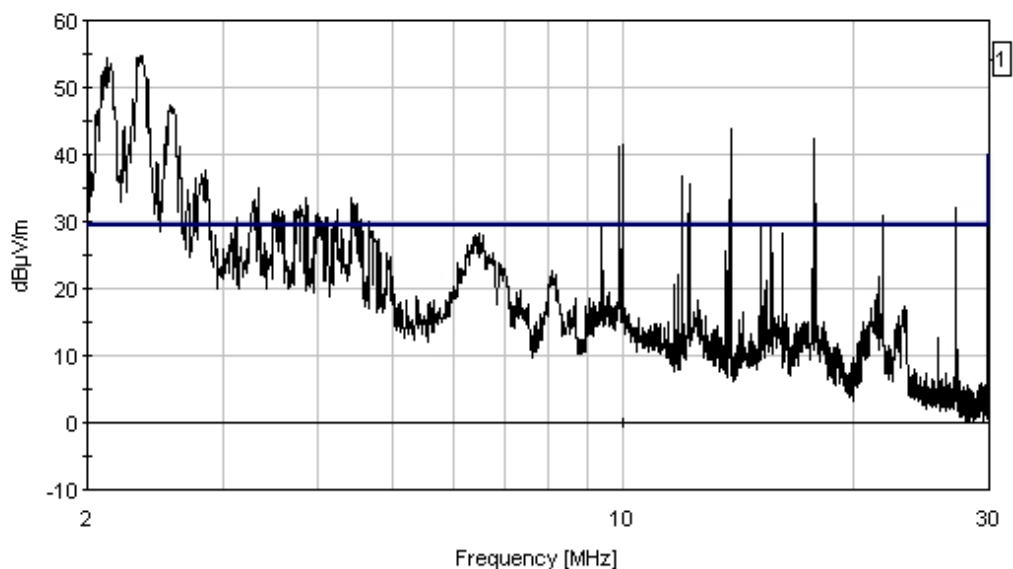

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 11:26:35
Sequence#: 417
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 1	Corinex	CXF-MVA-M1	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE1/MODE2.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5.553M	28.1	+0.1	+0.1	+9.2	-12.3	+0.0	25.2	29.5	-4.3	Paral
2	3.593M	26.6	+0.1	+0.2	+9.3	-12.3	+0.0	23.9	29.5	-5.6	Paral
QP	3.593M	31.2	+0.1	+0.2	+9.3	-12.3	+0.0	28.5	29.5	-1.0	Paral
4	6.537M	26.0	+0.1	+0.2	+9.2	-12.3	+0.0	23.2	29.5	-6.3	Paral
5	23.100M	23.2	+0.2	+0.3	+7.3	-12.3	+0.0	18.7	29.5	-10.8	Paral
6	19.130M	22.1	+0.2	+0.3	+8.2	-12.3	+0.0	18.5	29.5	-11.0	Paral

7	18.140M	21.5	+0.2	+0.3	+8.3	-12.3	+0.0	18.0	29.5	-11.5	Paral
8	15.935M	21.1	+0.2	+0.2	+8.5	-12.3	+0.0	17.7	29.5	-11.8	Paral
9	15.410M	21.0	+0.2	+0.2	+8.6	-12.3	+0.0	17.7	29.5	-11.8	Paral
10	21.713M	20.1	+0.2	+0.3	+7.7	-12.3	+0.0	15.9	29.5	-13.6	Paral
11	11.572M	16.3	+0.1	+0.2	+8.9	-12.3	+0.0	13.2	29.5	-16.3	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 11:26:35 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 417 Parallel
Overhead Test Site 3 Position 12 Medium Lines only. Notches off. MODE 1/2. Formal Power

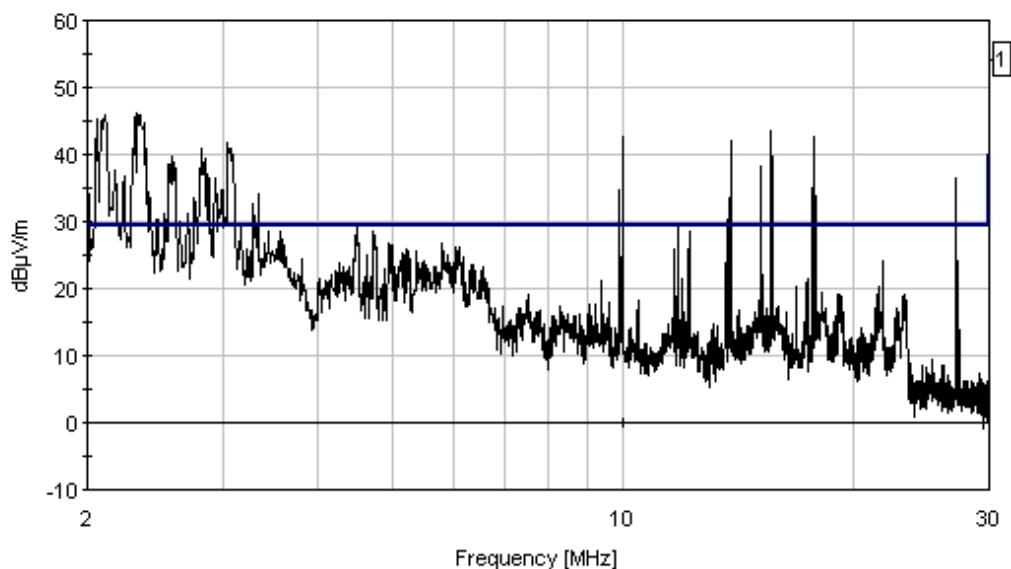

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/31/2006
 Test Type: **Radiated Scan** Time: 08:59:25
 Equipment: **BPL MV Gateway** Sequence#: 392
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 1: Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	18.366M	29.5	+0.2	+0.3	+8.2	-12.3	+0.0	25.9	29.5	-3.6	Perpe
QP											
^	18.366M	32.2	+0.2	+0.3	+8.2	-12.3	+0.0	28.6	29.5	-0.9	Perpe
3	24.749M	30.5	+0.2	+0.3	+7.0	-12.3	+0.0	25.7	29.5	-3.8	Perpe
QP											
^	24.749M	33.4	+0.2	+0.3	+7.0	-12.3	+0.0	28.6	29.5	-0.9	Perpe
5	18.909M	28.5	+0.2	+0.3	+8.2	-12.3	+0.0	24.9	29.5	-4.6	Perpe
QP											
^	18.909M	30.7	+0.2	+0.3	+8.2	-12.3	+0.0	27.1	29.5	-2.4	Perpe

7	14.849M	27.1	+0.2	+0.2	+8.6	-12.3	+0.0	23.8	29.5	-5.7	Perpe
QP											
^	14.849M	32.3	+0.2	+0.2	+8.6	-12.3	+0.0	29.0	29.5	-0.5	Perpe
9	28.593M	28.7	+0.3	+0.3	+5.5	-12.3	+0.0	22.4	29.5	-7.1	Perpe
10	23.064M	26.6	+0.2	+0.3	+7.3	-12.3	+0.0	22.1	29.5	-7.4	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 08:59:25 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 392 Perpendicular
Overhead Test Site 3 Position 1 Medium Lines only. Notches off. MODE 2/3. Formal Power

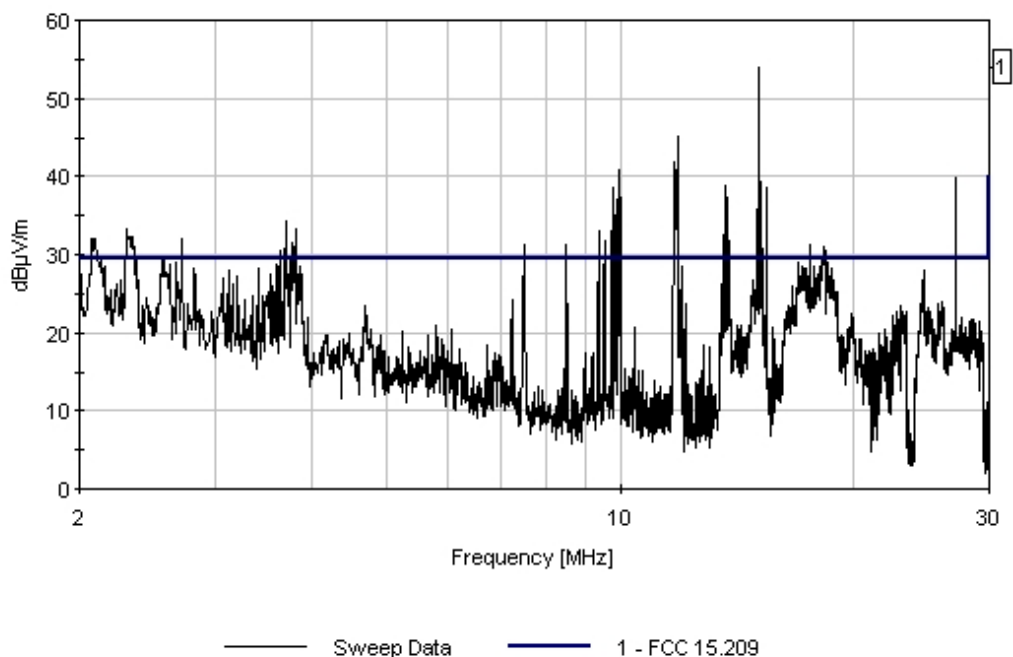

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: Corinex
 Model: MV Gateway
 S/N: ENG2

Date: 3/31/2006
 Time: 09:03:30
 Sequence#: 393
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 1: Testing using the Magnetic Loop Antenna from 2-30MHz. Test distance of antenna to pole is 10 meters. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data:


Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	14.116M	27.7	+0.2	+0.2	+8.7	-12.3	+0.0	24.5	29.5	-5.0	Paral
2	16.954M	28.0	+0.2	+0.2	+8.4	-12.3	+0.0	24.5	29.5	-5.0	Paral
^	16.954M	31.8	+0.2	+0.2	+8.4	-12.3	+0.0	28.3	29.5	-1.2	Paral
4	18.293M	27.0	+0.2	+0.3	+8.3	-12.3	+0.0	23.5	29.5	-6.0	Paral
5	20.255M	22.7	+0.2	+0.3	+8.0	-12.3	+0.0	18.9	29.5	-10.6	Paral
6	24.698M	22.6	+0.2	+0.3	+7.0	-12.3	+0.0	17.8	29.5	-11.7	Paral

7	27.588M	22.4	+0.3	+0.3	+5.9	-12.3	+0.0	16.6	29.5	-12.9	Paral
8	29.263M	23.0	+0.3	+0.3	+5.3	-12.3	+0.0	16.6	29.5	-12.9	Paral
9	25.850M	21.0	+0.2	+0.3	+6.6	-12.3	+0.0	15.8	29.5	-13.7	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 09:03:30 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 393 Parallel
Overhead Test Site 3 Position 1 Medium Lines only. Notches off. MODE 2/3. Formal Power

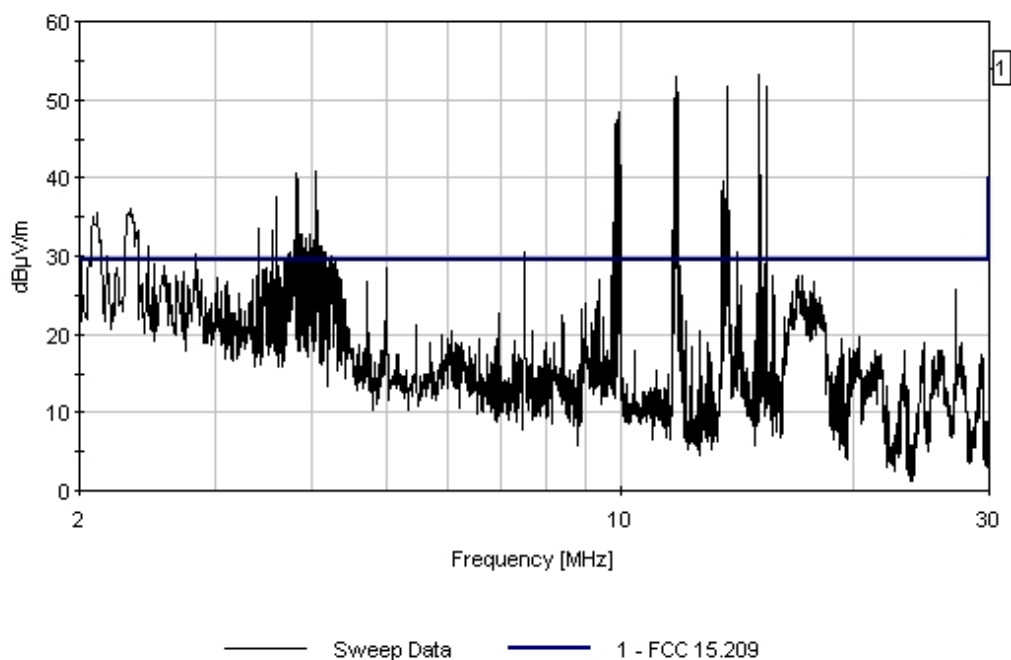

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 09:10:31
Sequence#: 394
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.749M	30.5	+0.2	+0.3	+7.0	-12.3	+0.0	25.7	29.5	-3.8	Paral
QP											
^	24.749M	33.5	+0.2	+0.3	+7.0	-12.3	+0.0	28.7	29.5	-0.8	Paral
3	25.207M	30.0	+0.2	+0.3	+6.8	-12.3	+0.0	25.0	29.5	-4.5	Paral
QP											
^	25.207M	33.3	+0.2	+0.3	+6.8	-12.3	+0.0	28.3	29.5	-1.2	Paral
5	23.340M	28.8	+0.2	+0.3	+7.3	-12.3	+0.0	24.3	29.5	-5.2	Paral
QP											
^	23.340M	31.3	+0.2	+0.3	+7.3	-12.3	+0.0	26.8	29.5	-2.7	Paral

7	14.847M	27.0	+0.2	+0.2	+8.6	-12.3	+0.0	23.7	29.5	-5.8	Paral
QP											
^	14.847M	30.7	+0.2	+0.2	+8.6	-12.3	+0.0	27.4	29.5	-2.1	Paral
9	18.262M	26.7	+0.2	+0.3	+8.3	-12.3	+0.0	23.2	29.5	-6.3	Paral
QP											
^	18.262M	31.7	+0.2	+0.3	+8.3	-12.3	+0.0	28.2	29.5	-1.3	Paral
11	17.183M	25.0	+0.2	+0.2	+8.4	-12.3	+0.0	21.5	29.5	-8.0	Paral
QP											
^	17.183M	29.3	+0.2	+0.2	+8.4	-12.3	+0.0	25.8	29.5	-3.7	Paral
13	26.098M	25.8	+0.2	+0.3	+6.5	-12.3	+0.0	20.5	29.5	-9.0	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 09:10:31 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 394 Parallel
Overhead Test Site 3 Position 2 Medium Lines only. Notches off. MODE 2/3. Formal Power

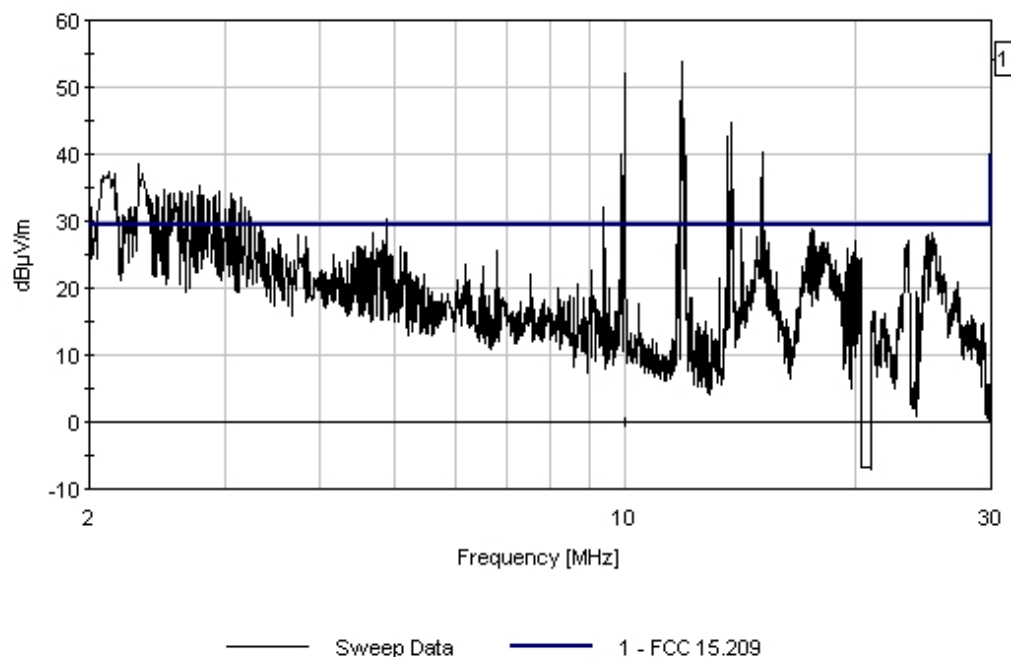

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 09:15:44
 Sequence#: 395
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 2: 10 meters out from medium voltage lines the BPL is connected 4.17 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.028M	28.7	+0.2	+0.2	+8.4	-12.3	+0.0	25.2	29.5	-4.3	Perpe
2	24.780M	27.9	+0.2	+0.3	+6.9	-12.3	+0.0	23.0	29.5	-6.5	Perpe
3	18.412M	26.3	+0.2	+0.3	+8.2	-12.3	+0.0	22.7	29.5	-6.8	Perpe
4	14.920M	24.3	+0.2	+0.2	+8.6	-12.3	+0.0	21.0	29.5	-8.5	Perpe
Q ^P											
^	14.920M	29.4	+0.2	+0.2	+8.6	-12.3	+0.0	26.1	29.5	-3.4	Perpe

6	23.459M	23.8	+0.2	+0.3	+7.2	-12.3	+0.0	19.2	29.5	-10.3	Perpe
7	28.412M	23.5	+0.3	+0.3	+5.6	-12.3	+0.0	17.4	29.5	-12.1	Perpe
8	27.238M	23.0	+0.2	+0.3	+6.0	-12.3	+0.0	17.2	29.5	-12.3	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 09:15:44 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 395 Perpendicular
Overhead Test Site 3 Position 2 Medium Lines only. Notches off. MODE 2/3. Formal Power

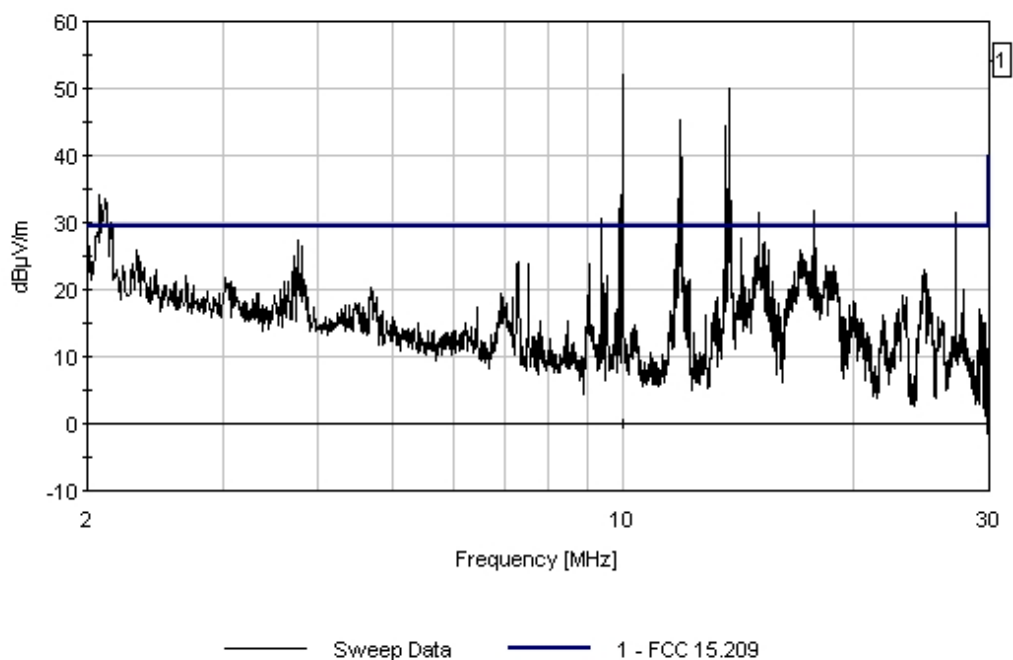

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •
 Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/31/2006
 Test Type: **Radiated Scan** Time: 09:18:55
 Equipment: **BPL MV Gateway** Sequence#: 396
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.845M	26.4	+0.2	+0.2	+8.6	-12.3	+0.0	23.1	29.5	-6.4	Perpe
QP											
^	14.845M	30.8	+0.2	+0.2	+8.6	-12.3	+0.0	27.5	29.5	-2.0	Perpe
3	24.691M	26.8	+0.2	+0.3	+7.0	-12.3	+0.0	22.0	29.5	-7.5	Perpe
4	17.268M	24.8	+0.2	+0.2	+8.4	-12.3	+0.0	21.3	29.5	-8.2	Perpe
5	18.917M	24.3	+0.2	+0.3	+8.2	-12.3	+0.0	20.7	29.5	-8.8	Perpe
6	23.093M	23.3	+0.2	+0.3	+7.3	-12.3	+0.0	18.8	29.5	-10.7	Perpe
7	26.057M	23.8	+0.2	+0.3	+6.5	-12.3	+0.0	18.5	29.5	-11.0	Perpe
8	29.382M	23.3	+0.3	+0.3	+5.2	-12.3	+0.0	16.8	29.5	-12.7	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 09:18:55 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 396 Perpendicular
Overhead Test Site 3 Position 3 Medium Lines only. Notches off. MODE 2/3. Formal Power

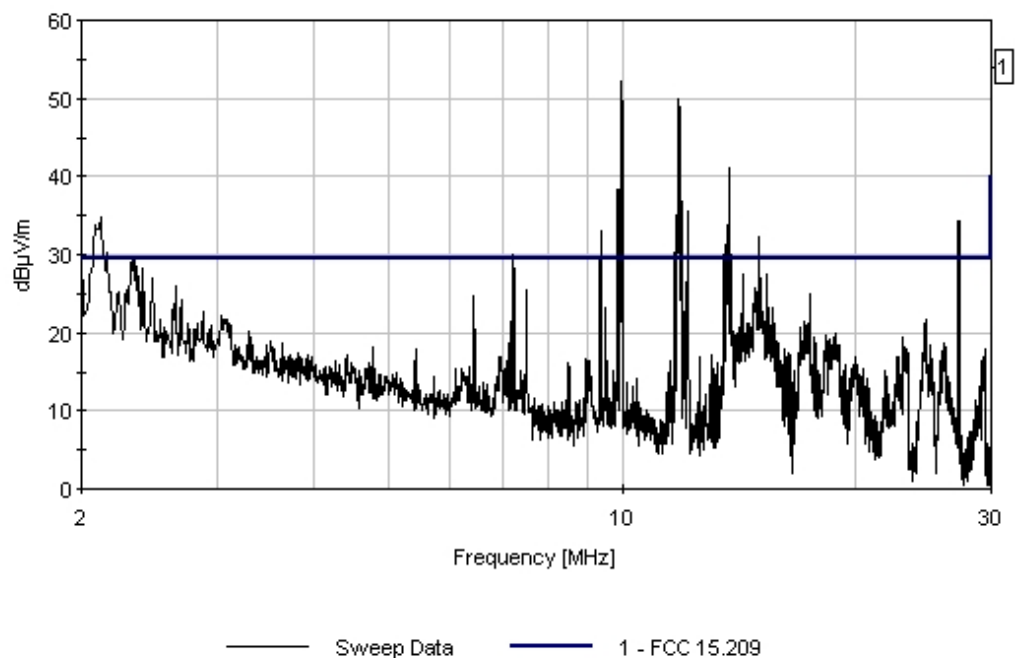

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 09:26:20
Sequence#: 397
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 3: 10 meters out from medium voltage lines the BPL is connected 8.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.687M	33.0	+0.2	+0.3	+7.0	-12.3	+0.0	28.2	29.5	-1.3	Paral
QP											
^	24.687M	36.2	+0.2	+0.3	+7.0	-12.3	+0.0	31.4	29.5	+1.9	Paral
3	15.218M	30.4	+0.2	+0.2	+8.6	-12.3	+0.0	27.1	29.5	-2.4	Paral
QP											
^	15.218M	37.9	+0.2	+0.2	+8.6	-12.3	+0.0	34.6	29.5	+5.1	Paral
5	23.078M	29.1	+0.2	+0.3	+7.3	-12.3	+0.0	24.6	29.5	-4.9	Paral
QP											
^	23.078M	32.1	+0.2	+0.3	+7.3	-12.3	+0.0	27.6	29.5	-1.9	Paral

7	26.719M	29.9	+0.2	+0.3	+6.2	-12.3	+0.0	24.3	29.5	-5.2	Paral
8	16.952M	27.4	+0.2	+0.2	+8.4	-12.3	+0.0	23.9	29.5	-5.6	Paral
QP											
^	16.952M	30.9	+0.2	+0.2	+8.4	-12.3	+0.0	27.4	29.5	-2.1	Paral
10	18.408M	26.4	+0.2	+0.3	+8.2	-12.3	+0.0	22.8	29.5	-6.7	Paral
QP											
^	18.408M	30.7	+0.2	+0.3	+8.2	-12.3	+0.0	27.0	29.5	-2.5	Paral
12	28.552M	28.3	+0.3	+0.3	+5.5	-12.3	+0.0	22.1	29.5	-7.4	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 09:26:20 Corinex VVO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 397 Parallel
Overhead Test Site 3 Position 3 Medium Lines only. Notches off. MODE 2/3. Formal Power

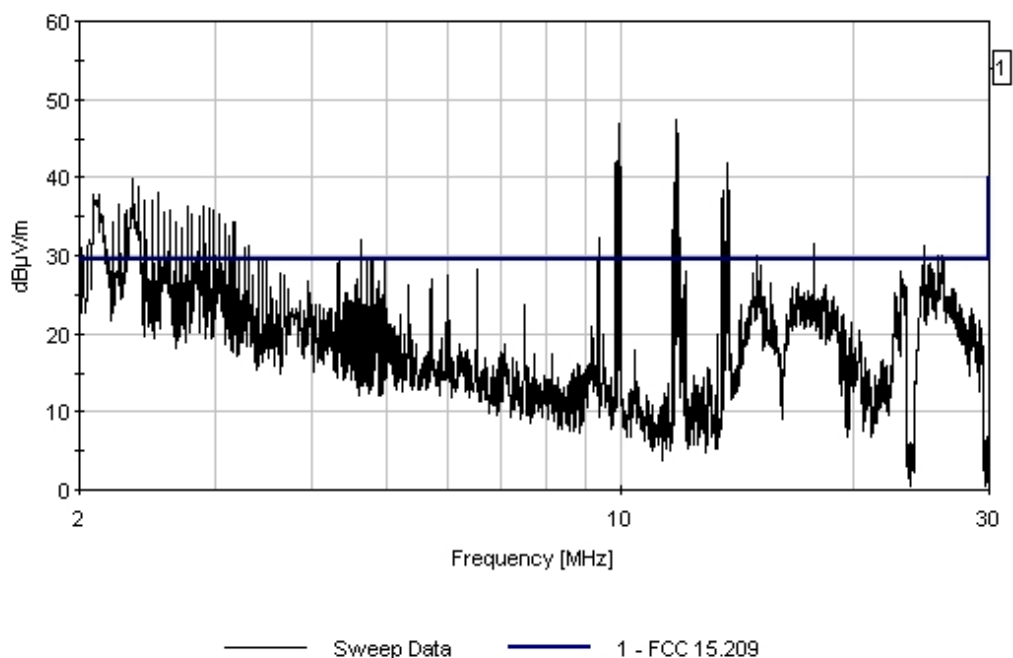

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 09:36:32
 Sequence#: 398
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.750M	30.4	+0.2	+0.3	+7.0	-12.3	+0.0	25.6	29.5	-3.9	Paral
QP											
^	24.750M	33.5	+0.2	+0.3	+7.0	-12.3	+0.0	28.7	29.5	-0.8	Paral
3	23.287M	29.5	+0.2	+0.3	+7.3	-12.3	+0.0	25.0	29.5	-4.5	Paral
4	28.436M	31.0	+0.3	+0.3	+5.6	-12.3	+0.0	24.9	29.5	-4.6	Paral
5	16.954M	27.5	+0.2	+0.2	+8.4	-12.3	+0.0	24.0	29.5	-5.5	Paral
QP											
^	16.954M	31.4	+0.2	+0.2	+8.4	-12.3	+0.0	27.9	29.5	-1.6	Paral

7	18.134M	25.7	+0.2	+0.3	+8.3	-12.3	+0.0	22.2	29.5	-7.3	Paral
QP											
^	18.134M	29.2	+0.2	+0.3	+8.3	-12.3	+0.0	25.6	29.5	-3.9	Paral
9	14.848M	24.8	+0.2	+0.2	+8.6	-12.3	+0.0	21.5	29.5	-8.0	Paral
10	29.081M	27.6	+0.3	+0.3	+5.3	-12.3	+0.0	21.2	29.5	-8.3	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 09:36:32 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 398 Parallel
Overhead Test Site 3 Position 4 Medium Lines only. Notches off. MODE 2/3. Formal Power

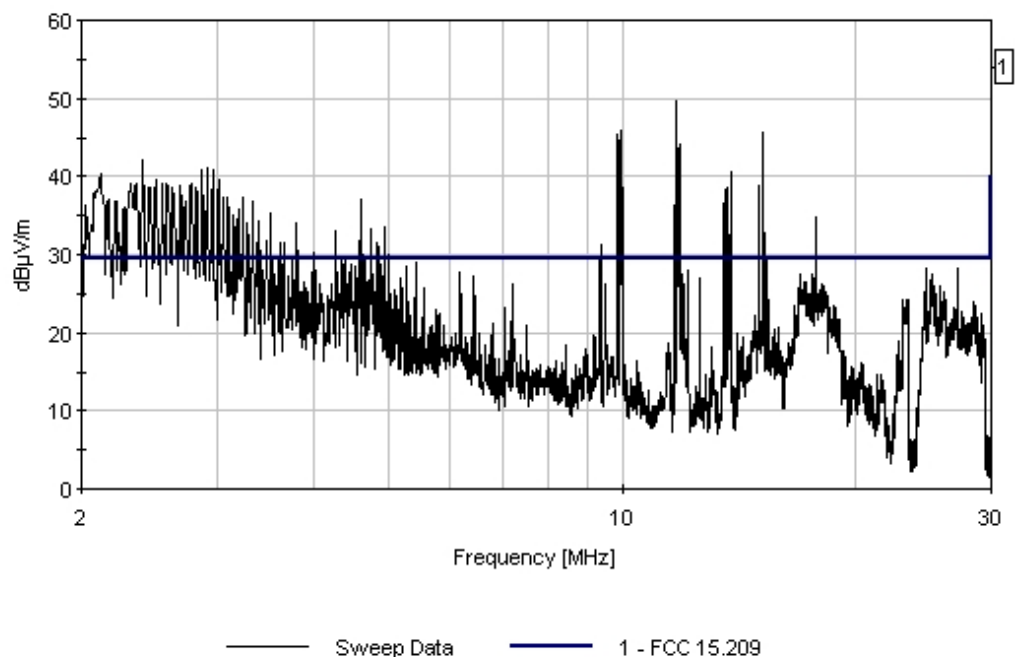

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 09:42:28
 Sequence#: 399
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 4: 10 meters out from medium voltage lines the BPL is connected 12.5 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	14.849M	28.6	+0.2	+0.2	+8.6	-12.3	+0.0	25.3	29.5	-4.2	Perpe
QP											
^	14.849M	32.4	+0.2	+0.2	+8.6	-12.3	+0.0	29.1	29.5	-0.4	Perpe
3	17.643M	28.2	+0.2	+0.3	+8.3	-12.3	+0.0	24.7	29.5	-4.8	Perpe
4	15.622M	25.7	+0.2	+0.2	+8.5	-12.3	+0.0	22.3	29.5	-7.2	Perpe
5	19.163M	23.2	+0.2	+0.3	+8.2	-12.3	+0.0	19.6	29.5	-9.9	Perpe
6	24.700M	21.5	+0.2	+0.3	+7.0	-12.3	+0.0	16.7	29.5	-12.8	Perpe

7	25.800M	20.7	+0.2	+0.3	+6.6	-12.3	+0.0	15.5	29.5	-14.0	Perpe
8	23.338M	19.2	+0.2	+0.3	+7.3	-12.3	+0.0	14.7	29.5	-14.8	Perpe
9	29.425M	20.9	+0.3	+0.3	+5.2	-12.3	+0.0	14.4	29.5	-15.1	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 09:42:28 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 399 Perpendicular
Overhead Test Site 3 Position 4 Medium Lines only. Notches off. MODE 2/3. Formal Power

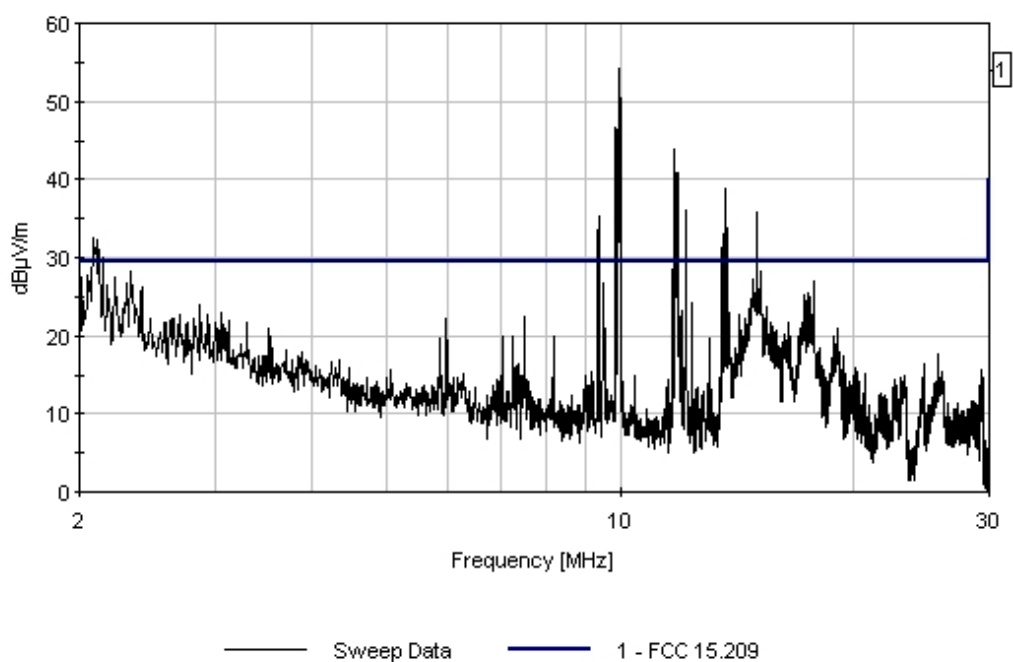

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 09:52:30
 Sequence#: 400
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	26.111M	30.2	+0.2	+0.3	+6.4	-12.3	+0.0	24.8	29.5	-4.7	Paral
2	24.751M	28.8	+0.2	+0.3	+7.0	-12.3	+0.0	24.0	29.5	-5.5	Paral
QP											
^	24.751M	31.9	+0.2	+0.3	+7.0	-12.3	+0.0	27.1	29.5	-2.4	Paral
4	28.600M	28.4	+0.3	+0.3	+5.5	-12.3	+0.0	22.2	29.5	-7.3	Paral
5	14.853M	25.0	+0.2	+0.2	+8.6	-12.3	+0.0	21.7	29.5	-7.8	Paral
6	23.096M	25.7	+0.2	+0.3	+7.3	-12.3	+0.0	21.2	29.5	-8.3	Paral

7	18.310M	24.5	+0.2	+0.3	+8.3	-12.3	+0.0	21.0	29.5	-8.5	Paral
8	16.564M	22.2	+0.2	+0.2	+8.4	-12.3	+0.0	18.7	29.5	-10.8	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 09:52:30 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 400 Parallel
 Overhead Test Site 3 Position 5 Medium Lines only. Notches off. MODE 2/3. Formal Power

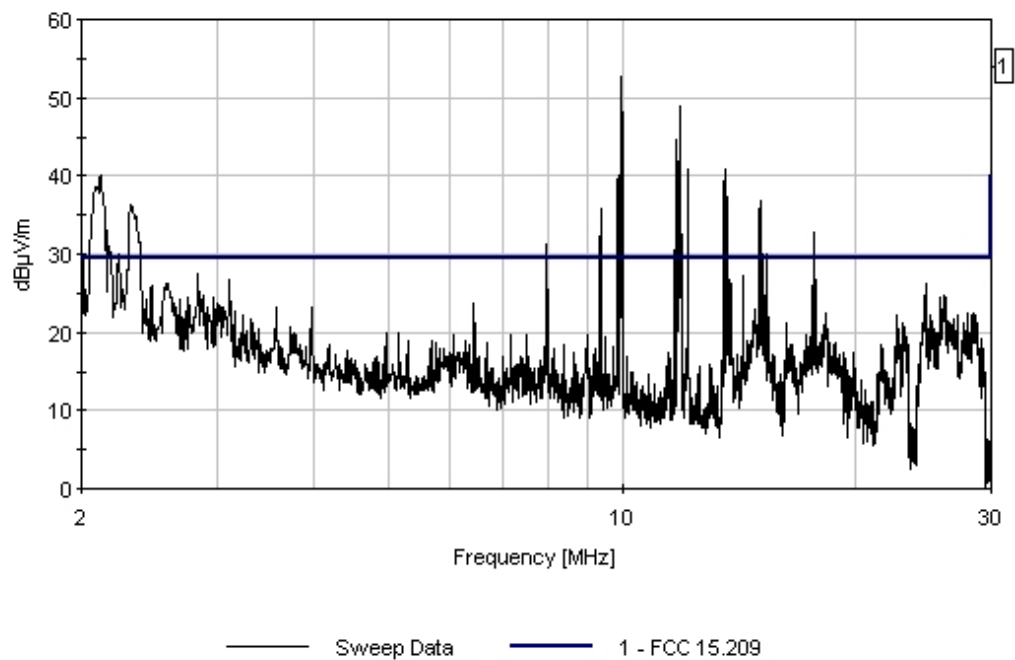

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 09:56:23
 Sequence#: 401
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 5: 10 meters out from medium voltage lines the BPL is connected 16.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.700M	28.9	+0.2	+0.3	+7.0	-12.3	+0.0	24.1	29.5	-5.4	Perpe
2	14.849M	26.9	+0.2	+0.2	+8.6	-12.3	+0.0	23.6	29.5	-5.9	Perpe
QP	14.849M	30.8	+0.2	+0.2	+8.6	-12.3	+0.0	27.5	29.5	-2.0	Perpe
4	17.244M	26.3	+0.2	+0.2	+8.4	-12.3	+0.0	22.8	29.5	-6.7	Perpe
5	23.088M	26.9	+0.2	+0.3	+7.3	-12.3	+0.0	22.4	29.5	-7.1	Perpe

6	26.063M	27.5	+0.2	+0.3	+6.5	-12.3	+0.0	22.2	29.5	-7.3	Perpe
7	27.688M	25.4	+0.3	+0.3	+5.8	-12.3	+0.0	19.5	29.5	-10.0	Perpe
8	29.375M	23.0	+0.3	+0.3	+5.2	-12.3	+0.0	16.5	29.5	-13.0	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 09:56:23 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 401 Perpendicular
Overhead Test Site 3 Position 5 Medium Lines only. Notches off. MODE 2/3. Formal Power

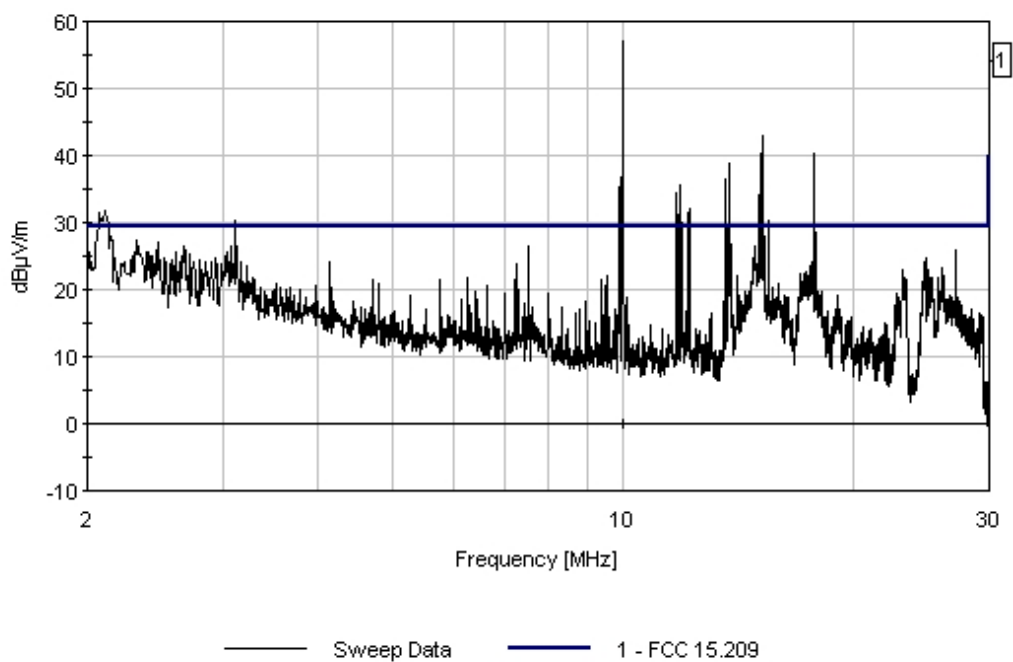

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 10:03:24
 Sequence#: 402
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.749M	29.4	+0.2	+0.3	+7.0	-12.3	+0.0	24.6	29.5	-4.9	Perpe
QP											
^	24.749M	32.6	+0.2	+0.3	+7.0	-12.3	+0.0	27.8	29.5	-1.7	Perpe
3	23.080M	28.5	+0.2	+0.3	+7.3	-12.3	+0.0	24.0	29.5	-5.5	Perpe
4	15.440M	26.7	+0.2	+0.2	+8.5	-12.3	+0.0	23.2	29.5	-6.3	Perpe
5	25.734M	28.3	+0.2	+0.3	+6.6	-12.3	+0.0	23.1	29.5	-6.4	Perpe

6	18.420M	24.6	+0.2	+0.3	+8.2	-12.3	+0.0	21.0	29.5	-8.5	Perpe
7	16.280M	22.5	+0.2	+0.2	+8.5	-12.3	+0.0	19.1	29.5	-10.4	Perpe
8	27.978M	24.7	+0.3	+0.3	+5.7	-12.3	+0.0	18.7	29.5	-10.8	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 10:03:24 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 402 Perpendicular
Overhead Test Site 3 Position 6 Medium Lines only. Notches off. MODE 2/3. Formal Power

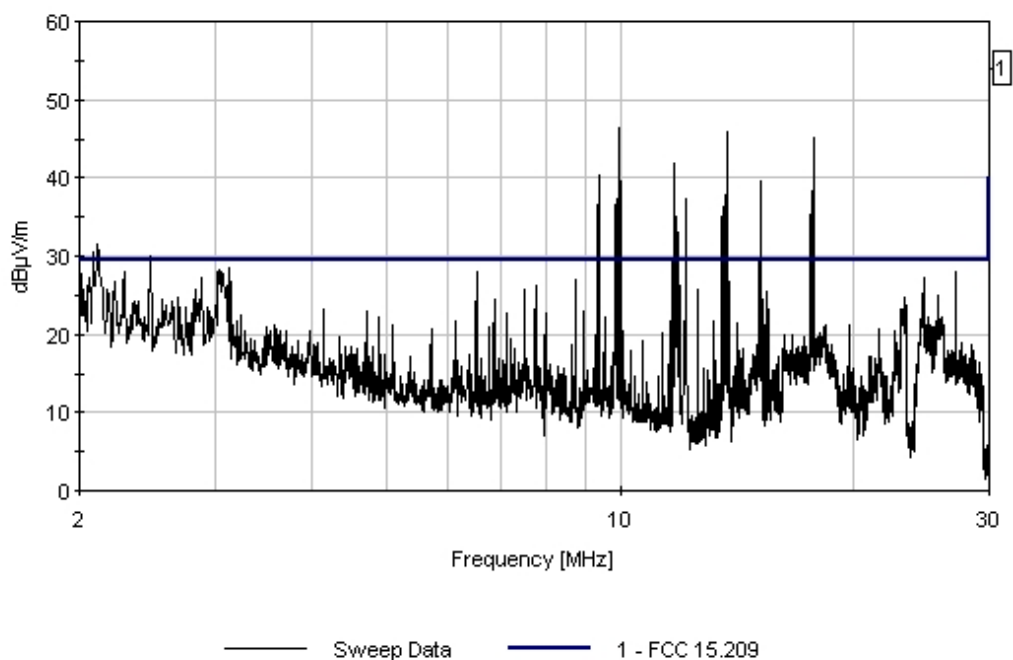

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 10:07:09
 Sequence#: 403
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 6: 10 meters out from medium voltage lines the BPL is connected 25.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.748M	29.4	+0.2	+0.3	+7.0	-12.3	+0.0	24.6	29.5	-4.9	Paral
QP											
^	24.748M	32.5	+0.2	+0.3	+7.0	-12.3	+0.0	27.7	29.5	-1.8	Paral
3	18.380M	28.2	+0.2	+0.3	+8.2	-12.3	+0.0	24.6	29.5	-4.9	Paral
4	23.188M	28.9	+0.2	+0.3	+7.3	-12.3	+0.0	24.4	29.5	-5.1	Paral
5	25.141M	29.2	+0.2	+0.3	+6.8	-12.3	+0.0	24.2	29.5	-5.3	Paral
6	16.580M	25.1	+0.2	+0.2	+8.4	-12.3	+0.0	21.6	29.5	-7.9	Paral

7	14.760M	24.9	+0.2	+0.2	+8.6	-12.3	+0.0	21.6	29.5	-7.9	Paral
8	27.584M	27.1	+0.3	+0.3	+5.9	-12.3	+0.0	21.3	29.5	-8.2	Paral
9	29.107M	24.6	+0.3	+0.3	+5.3	-12.3	+0.0	18.2	29.5	-11.3	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 10:07:09 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 403 Parallel
Overhead Test Site 3 Position 6 Medium Lines only. Notches off. MODE 2/3. Formal Power

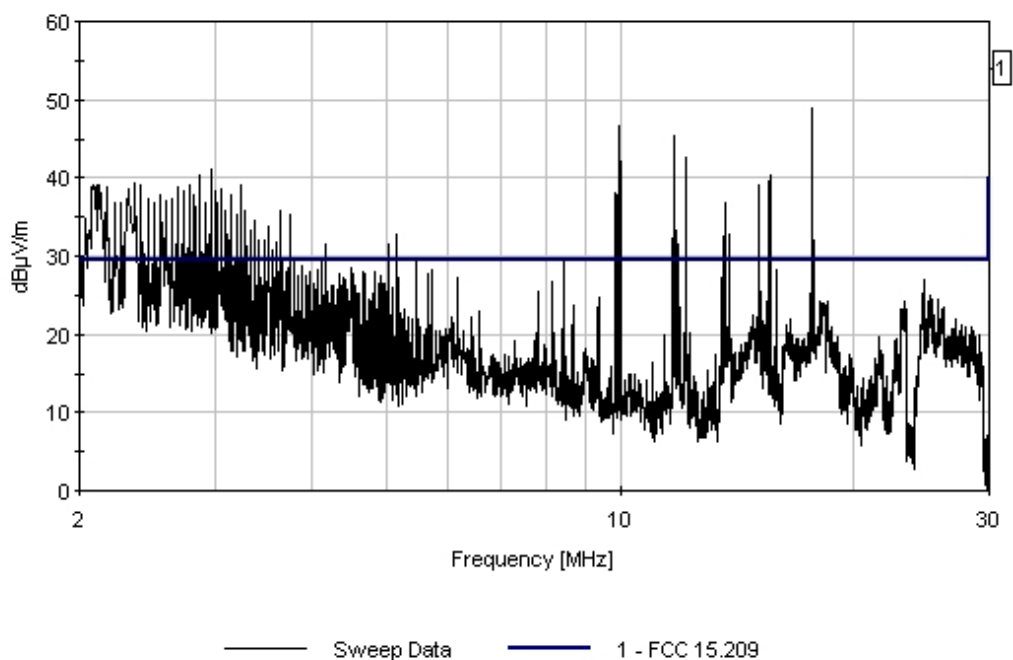

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 10:12:42
 Sequence#: 404
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.3 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	18.160M	22.8	+0.2	+0.3	+8.3	-12.3	+0.0	19.3	29.5	-10.2	Perpe
2	15.000M	22.3	+0.2	+0.2	+8.6	-12.3	+0.0	19.0	29.5	-10.5	Perpe
3	24.775M	23.5	+0.2	+0.3	+6.9	-12.3	+0.0	18.6	29.5	-10.9	Perpe
4	25.338M	22.9	+0.2	+0.3	+6.8	-12.3	+0.0	17.9	29.5	-11.6	Perpe
5	23.250M	21.0	+0.2	+0.3	+7.3	-12.3	+0.0	16.5	29.5	-13.0	Perpe
6	20.613M	18.5	+0.2	+0.3	+7.9	-12.3	+0.0	14.6	29.5	-14.9	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 10:12:42 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 404 Perpendicular
 Overhead Test Site 3 Position 7 Medium Lines only. Notches off. MODE 2/3. Formal Power

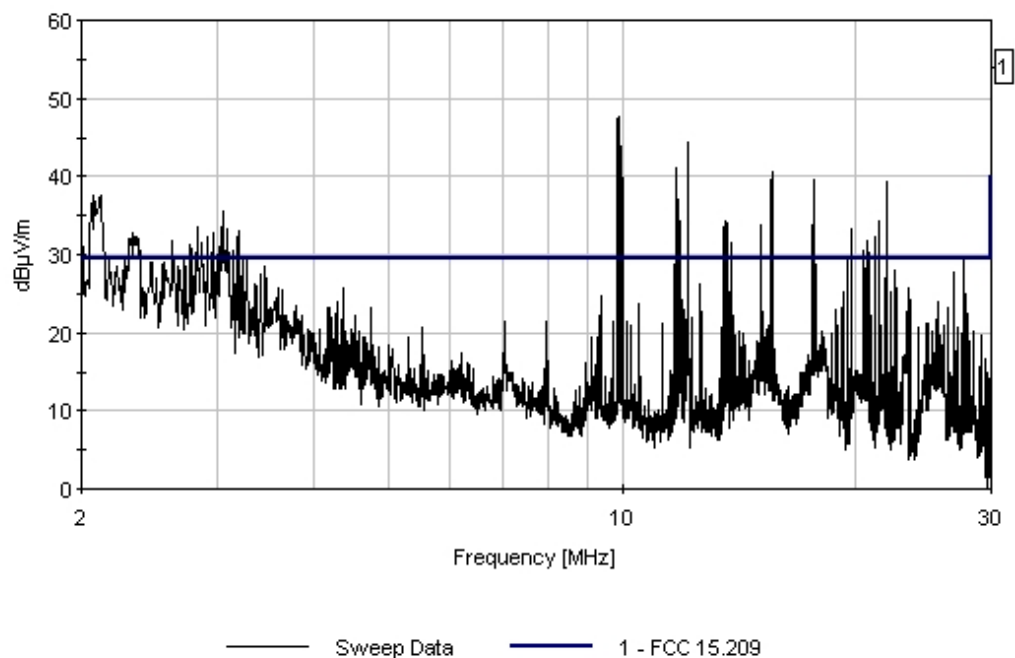

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**

Specification: **FCC 15.209**

Work Order #: **84818**

Test Type: **Radiated Scan**

Equipment: **BPL MV Gateway**

Manufacturer: **Corinex**

Model: **MV Gateway**

S/N: **ENG2**

Date: 3/31/2006

Time: 10:16:38

Sequence#: 405

Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 7: 10 meters out from medium voltage lines the BPL is connected 33.3 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.700M	26.4	+0.2	+0.3	+7.0	-12.3	+0.0	21.6	29.5	-7.9	Paral
2	18.180M	24.4	+0.2	+0.3	+8.3	-12.3	+0.0	20.9	29.5	-8.6	Paral
3	14.840M	23.9	+0.2	+0.2	+8.6	-12.3	+0.0	20.6	29.5	-8.9	Paral
4	26.188M	25.1	+0.2	+0.3	+6.4	-12.3	+0.0	19.6	29.5	-9.9	Paral
5	21.400M	21.3	+0.2	+0.3	+7.7	-12.3	+0.0	17.2	29.5	-12.3	Paral
6	23.438M	18.7	+0.2	+0.3	+7.2	-12.3	+0.0	14.1	29.5	-15.4	Paral
7	28.450M	18.0	+0.3	+0.3	+5.6	-12.3	+0.0	11.9	29.5	-17.6	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 10:16:38 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 405 Parallel
 Overhead Test Site 3 Position 7 Medium Lines only. Notches off. MODE 2/3. Formal Power

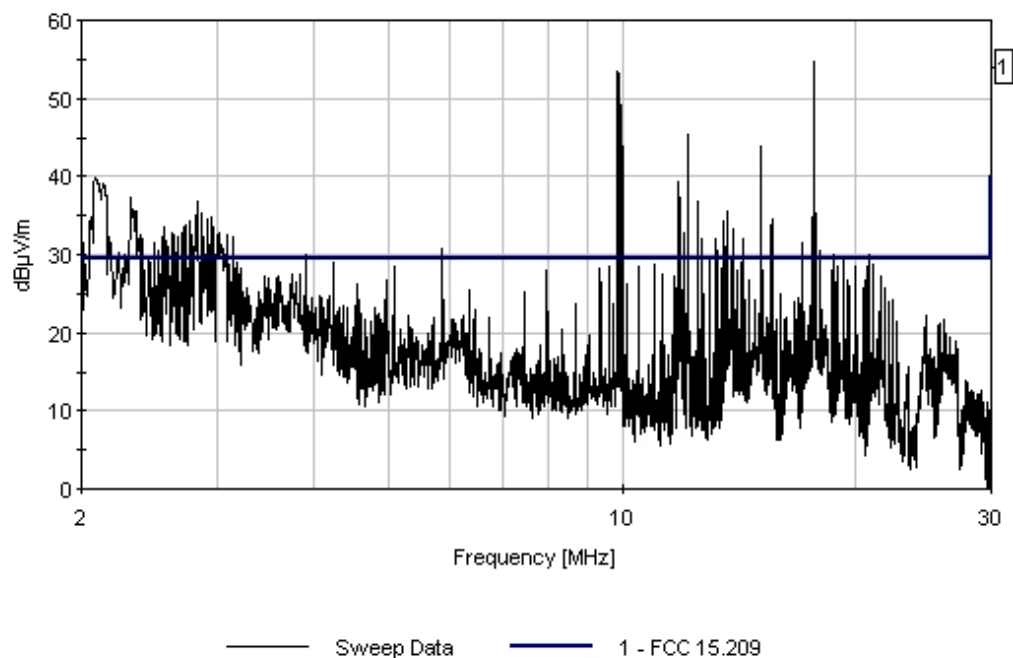

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •
 Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/31/2006
 Test Type: **Radiated Scan** Time: 10:19:55
 Equipment: **BPL MV Gateway** Sequence#: 406
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.775M	27.2	+0.2	+0.3	+6.9	-12.3	+0.0	22.3	29.5	-7.2	Perpe
2	26.175M	24.5	+0.2	+0.3	+6.4	-12.3	+0.0	19.1	29.5	-10.4	Perpe
3	15.335M	22.4	+0.2	+0.2	+8.6	-12.3	+0.0	19.1	29.5	-10.4	Perpe
4	23.100M	23.0	+0.2	+0.3	+7.3	-12.3	+0.0	18.5	29.5	-11.0	Perpe
5	21.850M	21.0	+0.2	+0.3	+7.6	-12.3	+0.0	16.8	29.5	-12.7	Perpe
6	17.330M	19.1	+0.2	+0.3	+8.3	-12.3	+0.0	15.6	29.5	-13.9	Perpe
7	27.688M	21.4	+0.3	+0.3	+5.8	-12.3	+0.0	15.5	29.5	-14.0	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 10:19:55 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 406 Perpendicular
 Overhead Test Site 3 Position 8 Medium Lines only. Notches off. MODE 2/3. Formal Power

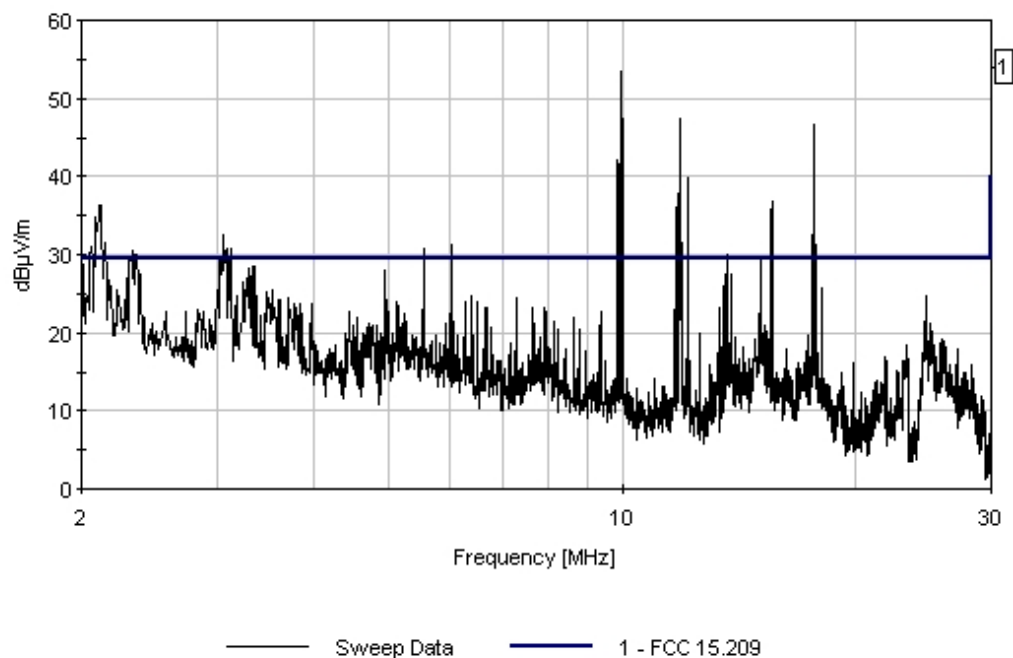

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 10:23:13
 Sequence#: 407
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 8: 10 meters out from medium voltage lines the BPL is connected 41.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.751M	29.5	+0.2	+0.3	+7.0	-12.3	+0.0	24.7	29.5	-4.8	Paral
QP											
^	24.751M	32.6	+0.2	+0.3	+7.0	-12.3	+0.0	27.8	29.5	-1.7	Paral
3	25.138M	28.4	+0.2	+0.3	+6.8	-12.3	+0.0	23.4	29.5	-6.1	Paral
4	21.700M	26.3	+0.2	+0.3	+7.7	-12.3	+0.0	22.2	29.5	-7.3	Paral
5	14.840M	24.8	+0.2	+0.2	+8.6	-12.3	+0.0	21.5	29.5	-8.0	Paral
6	18.365M	24.9	+0.2	+0.3	+8.2	-12.3	+0.0	21.3	29.5	-8.2	Paral

7	23.200M	23.6	+0.2	+0.3	+7.3	-12.3	+0.0	19.1	29.5	-10.4	Paral
8	28.450M	23.8	+0.3	+0.3	+5.6	-12.3	+0.0	17.7	29.5	-11.8	Paral
9	26.225M	22.4	+0.2	+0.3	+6.4	-12.3	+0.0	17.0	29.5	-12.5	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 10:23:13 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 407 Parallel
Overhead Test Site 3 Position 8 Medium Lines only. Notches off. MODE 2/3. Formal Power

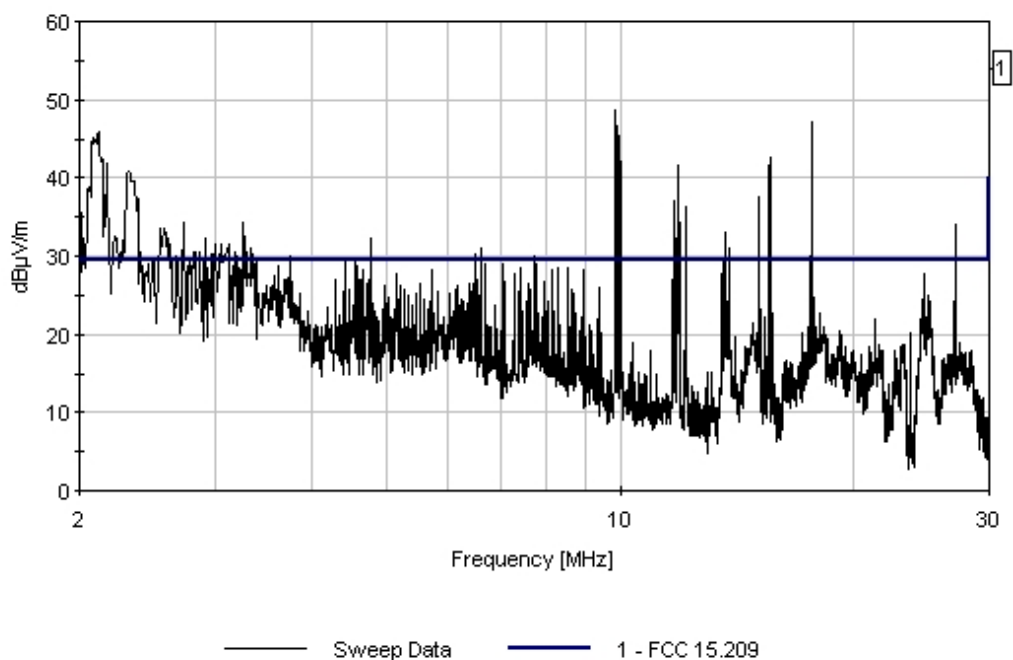

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**

Specification: **FCC 15.209**

Work Order #: **84818** Date: 3/31/2006

Test Type: **Radiated Scan** Time: 10:31:21

Equipment: **BPL MV Gateway** Sequence#: 408

Manufacturer: Corinex Tested By: C. Nicklas

Model: MV Gateway

S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.00 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	17.915M	22.0	+0.2	+0.3	+8.3	-12.3	+0.0	18.5	29.5	-11.0	Perpe
2	15.440M	21.8	+0.2	+0.2	+8.5	-12.3	+0.0	18.4	29.5	-11.1	Perpe
3	24.775M	21.3	+0.2	+0.3	+6.9	-12.3	+0.0	16.3	29.5	-13.2	Perpe
4	27.363M	18.5	+0.2	+0.3	+6.0	-12.3	+0.0	12.7	29.5	-16.8	Perpe
5	23.438M	16.6	+0.2	+0.3	+7.2	-12.3	+0.0	12.0	29.5	-17.5	Perpe
6	26.088M	17.1	+0.2	+0.3	+6.5	-12.3	+0.0	11.8	29.5	-17.7	Perpe
7	28.350M	15.4	+0.3	+0.3	+5.6	-12.3	+0.0	9.3	29.5	-20.2	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 10:31:21 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 408 Perpendicular
 Overhead Test Site 3 Position 9 Medium Lines only. Notches off. MODE 2/3. Formal Power

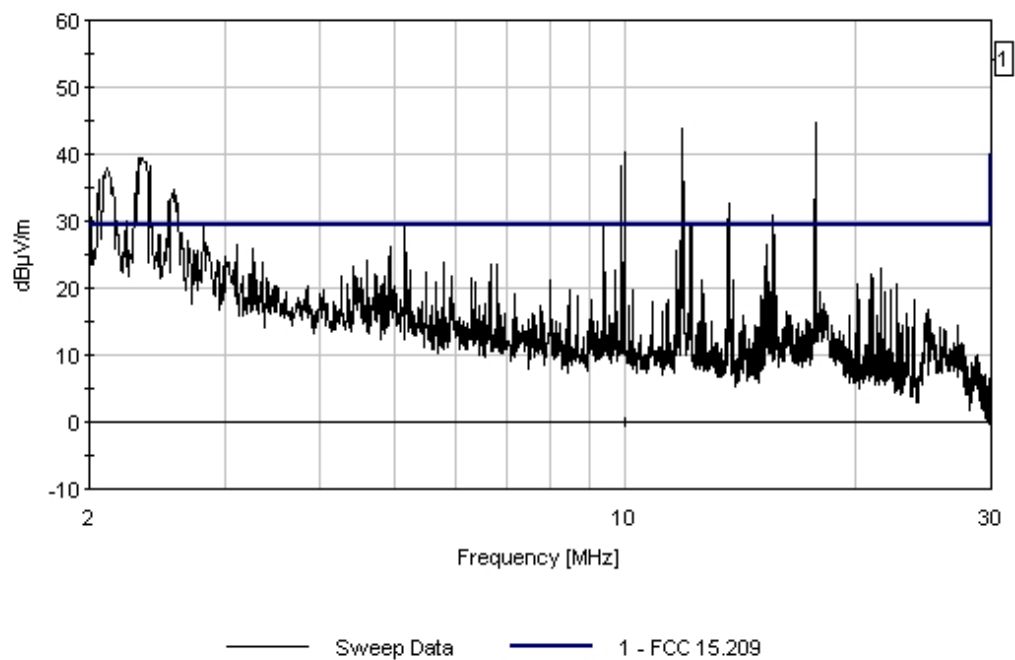

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 10:33:55
 Sequence#: 409
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 9: 10 meters out from medium voltage lines the BPL is connected 50.00 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	23.463M	25.6	+0.2	+0.3	+7.2	-12.3	+0.0	20.9	29.5	-8.6	Paral
2	14.900M	23.4	+0.2	+0.2	+8.6	-12.3	+0.0	20.1	29.5	-9.4	Paral
3	24.763M	23.3	+0.2	+0.3	+7.0	-12.3	+0.0	18.5	29.5	-11.0	Paral
4	17.345M	20.9	+0.2	+0.3	+8.3	-12.3	+0.0	17.4	29.5	-12.1	Paral
5	19.280M	20.4	+0.2	+0.3	+8.2	-12.3	+0.0	16.8	29.5	-12.7	Paral

6	25.763M	21.7	+0.2	+0.3	+6.6	-12.3	+0.0	16.5	29.5	-13.0	Paral
7	27.900M	18.1	+0.3	+0.3	+5.8	-12.3	+0.0	12.2	29.5	-17.3	Paral
8	29.438M	16.0	+0.3	+0.3	+5.2	-12.3	+0.0	9.5	29.5	-20.0	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 10:33:55 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 409 Parallel
Overhead Test Site 3 Position 9 Medium Lines only. Notches off. MODE 2/3. Formal Power

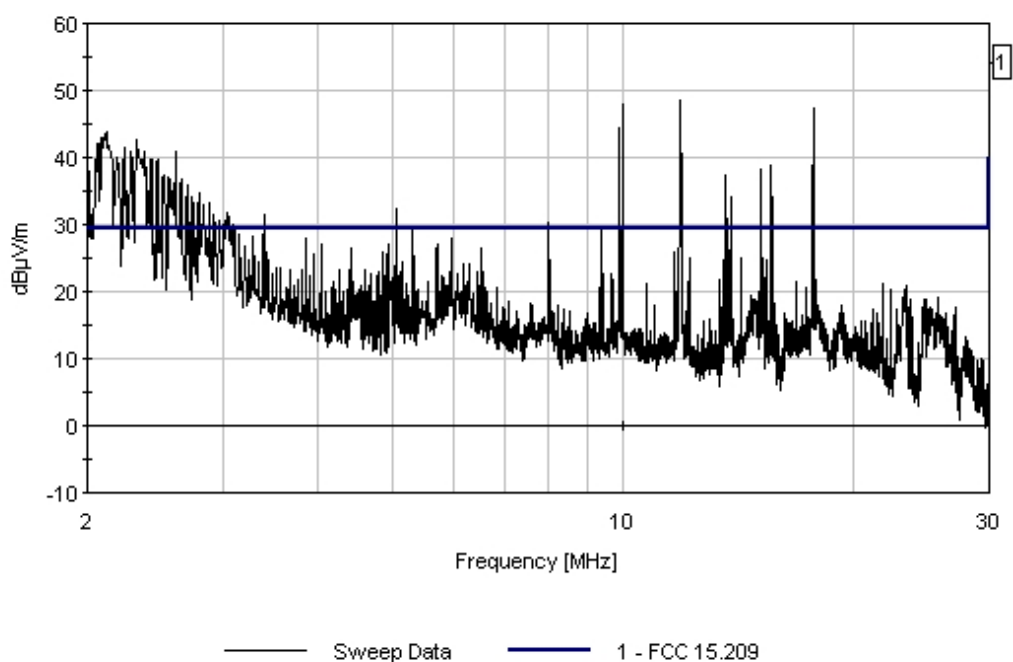

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**

Specification: **FCC 15.209**

Work Order #: **84818** Date: 3/31/2006

Test Type: **Radiated Scan** Time: 10:38:16

Equipment: **BPL MV Gateway** Sequence#: 410

Manufacturer: Corinex Tested By: C. Nicklas

Model: MV Gateway

S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	14.990M	22.5	+0.2	+0.2	+8.6	-12.3	+0.0	19.2	29.5	-10.3	Paral
2	24.763M	23.8	+0.2	+0.3	+7.0	-12.3	+0.0	19.0	29.5	-10.5	Paral
3	19.250M	21.6	+0.2	+0.3	+8.2	-12.3	+0.0	18.0	29.5	-11.5	Paral
4	16.715M	21.5	+0.2	+0.2	+8.4	-12.3	+0.0	18.0	29.5	-11.5	Paral
5	23.350M	21.9	+0.2	+0.3	+7.3	-12.3	+0.0	17.4	29.5	-12.1	Paral
6	26.225M	21.3	+0.2	+0.3	+6.4	-12.3	+0.0	15.9	29.5	-13.6	Paral
7	28.300M	16.7	+0.3	+0.3	+5.6	-12.3	+0.0	10.6	29.5	-18.9	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 10:38:16 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 410 Parallel
 Overhead Test Site 3 Position 10 Medium Lines only, Notches off, MODE 2/3, Formal Power

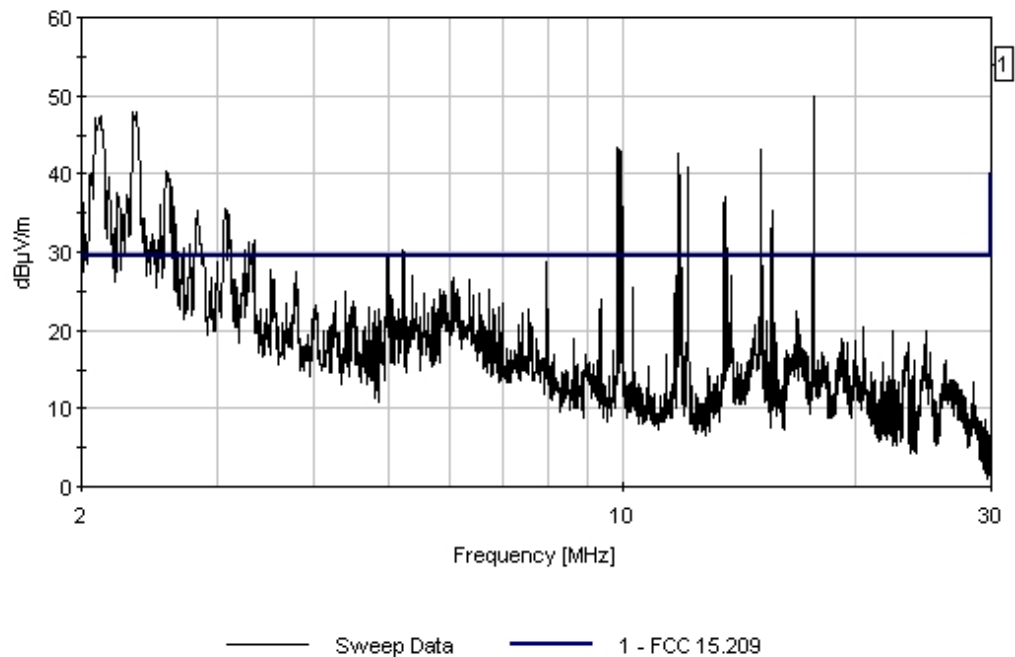

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 10:42:35
Sequence#: 411
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 10: 10 meters out from medium voltage lines the BPL is connected 58.33 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.


Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	23.163M	19.5	+0.2	+0.3	+7.3	-12.3	+0.0	15.0	29.5	-14.5	Perpe
2	18.305M	18.2	+0.2	+0.3	+8.3	-12.3	+0.0	14.7	29.5	-14.8	Perpe
3	15.440M	17.2	+0.2	+0.2	+8.5	-12.3	+0.0	13.8	29.5	-15.7	Perpe
4	24.775M	15.2	+0.2	+0.3	+6.9	-12.3	+0.0	10.3	29.5	-19.2	Perpe
5	25.775M	15.4	+0.2	+0.3	+6.6	-12.3	+0.0	10.2	29.5	-19.3	Perpe
6	28.450M	13.8	+0.3	+0.3	+5.6	-12.3	+0.0	7.7	29.5	-21.8	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 10:42:35 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 411 Perpendicular
 Overhead Test Site 3 Position 10 Medium Lines only, Notches off, MODE 2/3, Formal Power

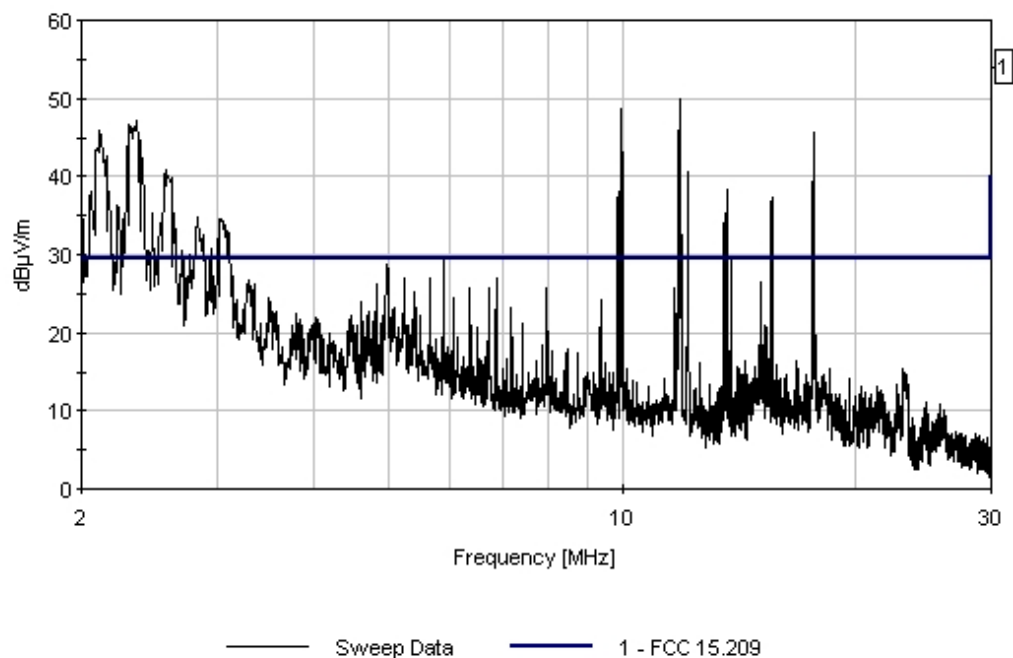

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**

Specification: **FCC 15.209**

Work Order #: **84818**

Test Type: **Radiated Scan**

Equipment: **BPL MV Gateway**

Manufacturer: **Corinex**

Model: **MV Gateway**

S/N: **ENG2**

Date: 3/31/2006

Time: 10:51:25

Sequence#: 412

Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	24.713M	26.0	+0.2	+0.3	+7.0	-12.3	+0.0	21.2	29.5	-8.3	Paral
2	19.070M	22.7	+0.2	+0.3	+8.2	-12.3	+0.0	19.1	29.5	-10.4	Paral
3	25.188M	23.6	+0.2	+0.3	+6.8	-12.3	+0.0	18.6	29.5	-10.9	Paral
4	14.990M	21.3	+0.2	+0.2	+8.6	-12.3	+0.0	18.0	29.5	-11.5	Paral
5	21.363M	21.9	+0.2	+0.3	+7.7	-12.3	+0.0	17.8	29.5	-11.7	Paral
6	16.730M	20.9	+0.2	+0.2	+8.4	-12.3	+0.0	17.4	29.5	-12.1	Paral
7	28.300M	18.6	+0.3	+0.3	+5.6	-12.3	+0.0	12.5	29.5	-17.0	Paral
8	26.663M	17.2	+0.2	+0.3	+6.2	-12.3	+0.0	11.6	29.5	-17.9	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 10:51:25 Corinex WO#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 412 Parallel
 Overhead Test Site 3 Position 11 Medium Lines only, Notches off, MODE 2/3, Formal Power

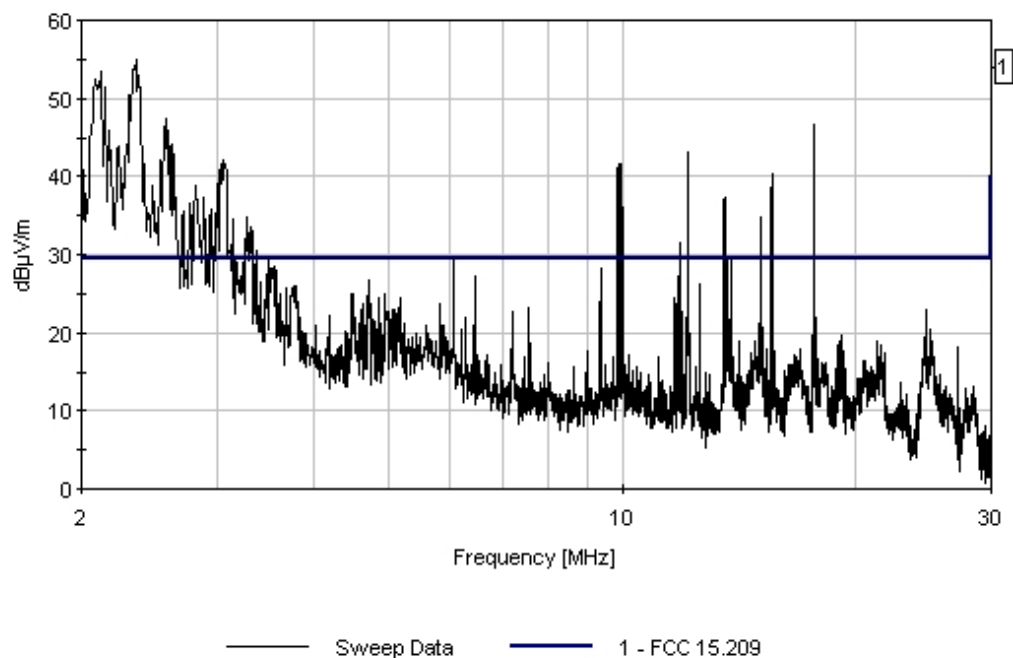

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •
 Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818** Date: 3/31/2006
 Test Type: **Radiated Scan** Time: 11:00:07
 Equipment: **BPL MV Gateway** Sequence#: 413
 Manufacturer: Corinex Tested By: C. Nicklas
 Model: MV Gateway
 S/N: ENG2

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 11: 10 meters out from medium voltage lines the BPL is connected 66.67 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \log(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	15.335M	19.8	+0.2	+0.2	+8.6	-12.3	+0.0	16.5	29.5	-13.0	Perpe
2	19.055M	19.1	+0.2	+0.3	+8.2	-12.3	+0.0	15.5	29.5	-14.0	Perpe
3	24.711M	19.1	+0.2	+0.3	+7.0	-12.3	+0.0	14.3	29.5	-15.2	Perpe
4	21.847M	17.0	+0.2	+0.3	+7.6	-12.3	+0.0	12.8	29.5	-16.7	Perpe
5	25.063M	16.7	+0.2	+0.3	+6.9	-12.3	+0.0	11.8	29.5	-17.7	Perpe
6	27.713M	13.1	+0.3	+0.3	+5.8	-12.3	+0.0	7.2	29.5	-22.3	Perpe
7	29.363M	11.3	+0.3	+0.3	+5.2	-12.3	+0.0	4.8	29.5	-24.7	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 11:00:07 Corinex W/O#: 84818
 FCC 15.209 Test Distance: 10 Meters Sequence#: 413 Perpendicular
 Overhead Test Site 3 Position 11 Medium Lines only, Notches off, MODE 2/3, Formal Power

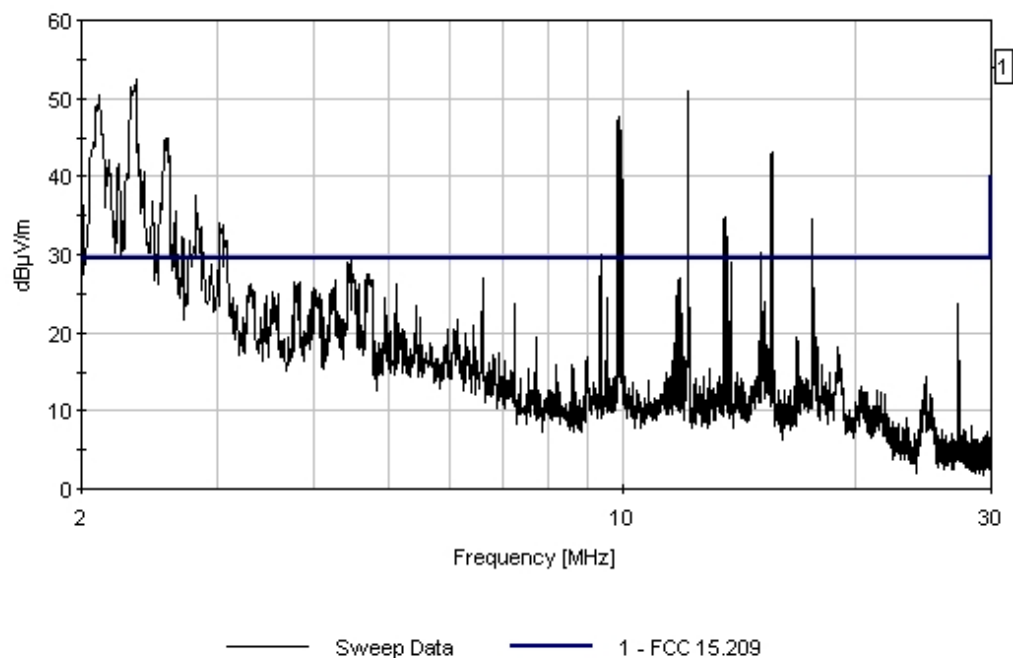

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
 Specification: **FCC 15.209**
 Work Order #: **84818**
 Test Type: **Radiated Scan**
 Equipment: **BPL MV Gateway**
 Manufacturer: **Corinex**
 Model: **MV Gateway**
 S/N: **ENG2**

Date: 3/31/2006
 Time: 11:08:12
 Sequence#: 414
 Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \cdot \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:


T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	23.175M	25.2	+0.2	+0.3	+7.3	-12.3	+0.0	20.7	29.5	-8.8	Paral
2	19.235M	23.7	+0.2	+0.3	+8.2	-12.3	+0.0	20.1	29.5	-9.4	Paral
3	18.140M	23.0	+0.2	+0.3	+8.3	-12.3	+0.0	19.5	29.5	-10.0	Paral
4	26.238M	23.0	+0.2	+0.3	+6.4	-12.3	+0.0	17.6	29.5	-11.9	Paral
5	21.400M	21.6	+0.2	+0.3	+7.7	-12.3	+0.0	17.5	29.5	-12.0	Paral
6	14.825M	20.2	+0.2	+0.2	+8.6	-12.3	+0.0	16.9	29.5	-12.6	Paral

7	27.513M	22.4	+0.3	+0.3	+5.9	-12.3	+0.0	16.6	29.5	-12.9	Paral
8	16.280M	18.0	+0.2	+0.2	+8.5	-12.3	+0.0	14.6	29.5	-14.9	Paral
9	28.888M	19.6	+0.3	+0.3	+5.4	-12.3	+0.0	13.3	29.5	-16.2	Paral

Overhead Test Site #3 Date: 3/31/2006 Time: 11:08:12 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 414 Parallel
Overhead Test Site 3 Position 12 Medium Lines only. Notches off. MODE 2/3. Formal Power

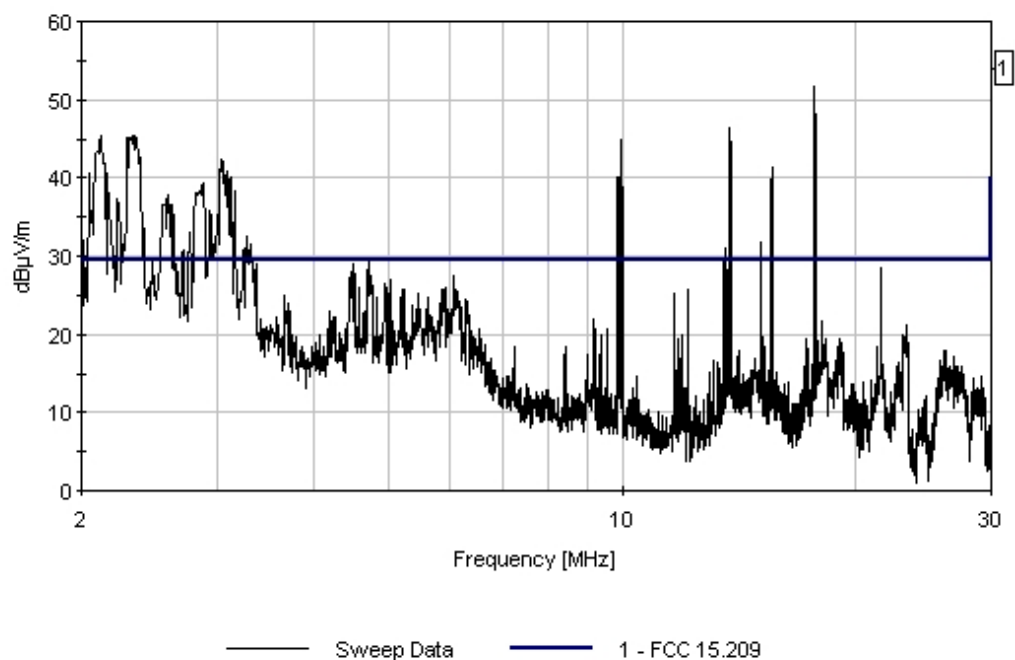

Test Location: Overhead Test Site #3 • Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. • Houston, TX •

Customer: **Corinex**
Specification: **FCC 15.209**
Work Order #: **84818**
Test Type: **Radiated Scan**
Equipment: **BPL MV Gateway**
Manufacturer: Corinex
Model: MV Gateway
S/N: ENG2

Date: 3/31/2006
Time: 11:12:31
Sequence#: 415
Tested By: C. Nicklas

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
BPL MV Gateway*	Corinex	MV Gateway	ENG2
Overhead Coupler	Arteche	Overcap-S-17	0517347/78
Combiner	Corinex	CXP-MVA-COM	none
Medium Voltage Powerline Filter Mode 2	Corinex	CXF-MVA-M2	none
Medium Voltage Powerline Filter Mode 3	Corinex	CXF-MVA-M3	none

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Formal Overhead Test Site #3 on Bennington Street west of Cochran Street at 4th pole from Cochran Street on the north side. Testing using the Mag Loop Antenna from 2-30MHz. Medium voltage wires are 11.95 meters above the street. Test Position 12: 10 meters out from medium voltage lines the BPL is connected 75.0 meters laterally down the power line. Slant Distance is 14.8 meters. Slant Distance correction factor is $-40 \times \text{LOG}(30/14.8) = -12.3\text{dB}$ at 1 meter test height. Unit is setup for maximum transmission over the medium voltage lines at the maximum power profile for Overhead lines. Notch Filters are off line. Tested from 2-30MHz. Unit in MODE2/MODE3.

Transducer Legend:

T1=PO 05440 RG214/U Cable	T2=Cable 2410
T3=Mag Loop - AN 00432- 9kHz-30M	T4=Slant Distance S3

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	23.463M	22.1	+0.2	+0.3	+7.2	-12.3	+0.0	17.4	29.5	-12.1	Perpe
2	21.375M	21.1	+0.2	+0.3	+7.7	-12.3	+0.0	17.0	29.5	-12.5	Perpe
3	17.225M	18.9	+0.2	+0.2	+8.4	-12.3	+0.0	15.4	29.5	-14.1	Perpe
4	15.320M	18.6	+0.2	+0.2	+8.6	-12.3	+0.0	15.3	29.5	-14.2	Perpe
5	18.410M	18.5	+0.2	+0.3	+8.2	-12.3	+0.0	14.9	29.5	-14.6	Perpe
6	16.250M	18.2	+0.2	+0.2	+8.5	-12.3	+0.0	14.8	29.5	-14.7	Perpe

7	26.100M	19.5	+0.2	+0.3	+6.5	-12.3	+0.0	14.2	29.5	-15.3	Perpe
8	24.563M	18.3	+0.2	+0.3	+7.0	-12.3	+0.0	13.5	29.5	-16.0	Perpe
9	27.450M	15.8	+0.3	+0.3	+5.9	-12.3	+0.0	10.0	29.5	-19.5	Perpe
10	29.388M	15.7	+0.3	+0.3	+5.2	-12.3	+0.0	9.2	29.5	-20.3	Perpe

Overhead Test Site #3 Date: 3/31/2006 Time: 11:12:31 Corinex WO#: 84818
FCC 15.209 Test Distance: 10 Meters Sequence#: 415 Perpendicular
Overhead Test Site 3 Position 12 Medium Lines only. Notches off. MODE 2/3. Formal Power

