

# TEST REPORT

of

FCC Part 27, Part 2

FCC ID: QMNRN-375

Equipment Under Test : CDMA 2000 1xRTT Mobile Phone  
Model Name : RM-375  
Serial No. : N/A  
Applicant : Nokia Inc.  
Manufacturer : Compal Communications(Nanjing) Co., Ltd.  
Date of Test(s) : 2009-01-06 ~ 2009-01-14  
Date of Issue : 2009-01-16

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date:

2009-01-16

Feel Jeong

Approved By:



Date:

2009-01-16

Charles Kim

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

# INDEX

<b><u>TABLE OF CONTENTS</u></b>		<b>Page</b>
<b>1. General Information -----</b>		<b>3</b>
<b>2. RF Radiated Output Power -----</b>		<b>8</b>
<b>3. Field Strength of Spurious Radiation -----</b>		<b>11</b>
<b>4. Conducted Output Power -----</b>		<b>14</b>

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General Information

### 1-1. Testing Laboratory

SGS Testing Korea Co., Ltd.

- 705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

Telephone : +82 31 428 5700

FAX : +82 31 427 2371

### 1-2. Details of Applicant

Applicant : Nokia Inc.  
Address : 12278 Scripps Summit Dr. San Diego CA92131 USA  
Contact Person : Stephen Walmsley  
Phone No. : +1 604 456 5544  
Fax No. : -

### 1.3. Basic Description of Equipment under Test

<b>Kind of Product</b>		CDMA 2000 1xRTT Mobile Phone
<b>Model Name</b>		RM-375
<b>AC Adapter</b>	<b>Manufacture</b>	Astec
	<b>Brand Name</b>	Nokia
	<b>Model Name</b>	AC-6U
	<b>Power Rating</b>	I/P: 100 - 240 V <sub>ac</sub> , 50 - 60 Hz, 150 mA O/P: 5.0 V <sub>dc</sub> , 550 mA
	<b>AC Power Cord Type</b>	1.7 m non-shielded cable without ferrite core
<b>Battery</b>	<b>Manufacture</b>	Panasonic
	<b>Brand Name</b>	Nokia
	<b>Model Name</b>	BL-4B
	<b>Power Rating</b>	3.7 V <sub>dc</sub> , 700mAh
	<b>Type</b>	Li-ion
<b>Earphone</b>	<b>Manufacture</b>	Hosiden
	<b>Brand Name</b>	Nokia
	<b>Model Name</b>	HS-49
	<b>Signal Line Type</b>	1.7 meter non-shielded cable without ferrite core
<b>USB Cable</b>	<b>Manufacture</b>	Cheng Uei
	<b>Brand Name</b>	Nokia
	<b>Model Name</b>	CA-101
	<b>Signal Line Type</b>	1.1 m shielded cable without ferrite core

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**1-4. Description of EUT**

<b>Kind of Product</b>		CDMA 2000 1xRTT Mobile Phone
<b>Model Name</b>		RM-375
<b>Serial Number</b>		N/A
<b>Power Supply</b>	<b>Manufacture</b>	Panasonic
	<b>Brand Name</b>	Nokia
	<b>Model Name</b>	BL-4B
	<b>Power Rating</b>	3.7 V <sub>dc</sub> , 700mAh
	<b>Type</b>	Li-ion
<b>Tx Frequency Range</b>		Cellular: 824 ~ 849 MHz AWS: 1710 ~ 1755 MHz PCS: 1850 ~ 1910 MHz BT: 2402 ~ 2480 MHz
<b>Rx Frequency Range</b>		Cellular: 869 ~ 894 MHz AWS: 2110 ~ 2155 MHz PCS: 1930 ~ 1990 MHz BT: 2402 ~ 2480 MHz
<b>Transmit Power</b>		CDMA : ERP 25.95 dBm ( 393.55 mW) US PCS : EIRP 29.97 dBm ( 993.12 mW) AWS : EIRP 29.69 dBm ( 931.11 mW)
<b>Modulation Technique</b>		CDMA2000 :QPSK Bluetooth: GFSK, π/4DQPSK, 8DPSK
<b>Emission Designation</b>		1M28F9W(CDMA), 1M27F9W(AWS),1M28F9W(PCS),
<b>Operating Conditions</b>		-30 ~ 60
<b>Antenna Type</b>		Fixed type(BT, CDMA, US PCS, AWS)
<b>H/W Version</b>		6001
<b>S/W Version</b>		DS_4453B_GEN
<b>MEID</b>		A000000126A3C2

\* The spurious emission was measured in three orthogonal EUT positions (X-axis, Y-axis and Z-axis). Worst case is X-axis (AWS)

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**1-5. Details of modification**

-N/A

**1.6. Test Equipment List**

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Signal Generator	Agilent	E4438C	May 09 2009
Spectrum Analyzer	Agilent	E4440A	May 09 2009
Spectrum Analyzer	H.P	8593E	May 09 2009
Power Meter	Agilent	E4416A	May 09 2009
Power Sensor	Agilent	E9327A	May 09 2009
DC Power Supply	Agilent	6674A	May 09 2009
Test Receiver	Rohde & Schwarz	ESVS10	Mar. 21 2009
Ultra-Broadband Antenna	Rohde & Schwarz	HL562	Oct. 02 2009
Horn Antenna	Rohde & Schwarz	HF906	Nov. 13 2009
Dipole Antenna	VHAP/UHAP	975/958	Jan. 18 2010
Communication Antenna	AR	AT 4002	N/A
Band Reject Filter	Wainwright	WRCG824/849-814/85960/10SS	May 09 2009
Highpass Filter	Wainwright	WHK3.0/18G-10SS	Oct. 01 2009
Mobile Test Unit	Agilent	E5515C	May 09 2009

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Preamplifier	Agilent	8449B	May 09 2009
Preamplifier	Agilent	8447F	Jul. 03 2009
Power Amplifier	Empower RF System, Inc.	2001-BBS3Q7ECK	May 09 2009
Dual Directional Coupler	Agilent	778D	Jan. 01 2010
Anechoic Chamber	SY Corporation	L 9.6 m    W 6.4 m    H 6.4 m	Feb. 15 2009

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 1.7. Summary of Test Results

<b>APPLIED STANDARD:</b> <b>FCC Part 2, 27</b>		
<b>Section in FCC Part 2,27</b>	<b>Test Item</b>	<b>Result</b>
§2.1046 §27.50(d)(2)	RF Radiated Output Power	Complied
§2.1053 §27.53(g)	Field Strength of Spurious Radiation	Complied
§2.1046	Conducted Output Power	Complied

### 1.8. Test Report Revision

<b>Revision</b>	<b>Report number</b>	<b>Description</b>
0	F690501/RF-RTL002861	Initial
1	F690501/RF-RTL002861-1	It deletes some of test items

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2. RF Radiated Output Power


### 2.1. Limit

§27.50(d) (2) Fixed, mobile, and portable (hand-held) stations operating in the 1710 ~ 1755 MHz band are limited to a peak EIRP of 1 watt.


### 2.2. Test Procedure: Based on ANSI/TIA 603C: 2004

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a horn (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the large of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
18. The ERP/EIPR test under RC1/SO55 (AWS)

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

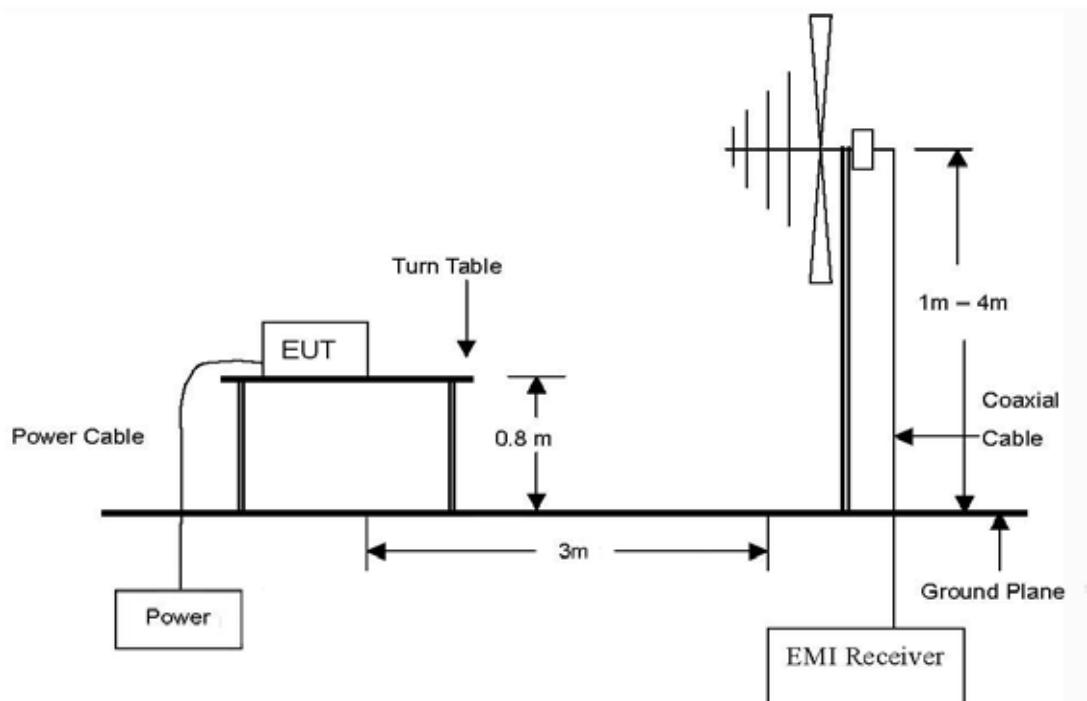

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 18 GHz Emissions.

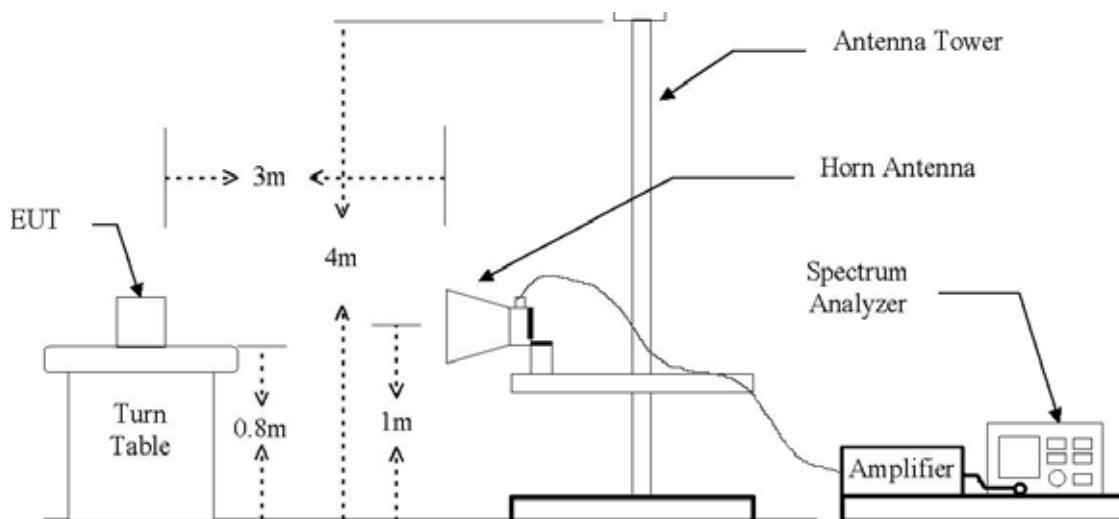

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 2.3. Test Results

Ambient temperature : 22      Relative humidity : 48 % R.H.

#### EIRP: AWS

Frequency (MHz)	Ant. Pol. (H/V)	C.L. (dB)	S.G. Reading +Amp (dBm)	Antenna Gain (dBi)	E. I. R. P.	
					(dBm)	(mW)
1711.25	H	0.96	20.41	8.30	27.75	595.66
	V	0.96	22.13	8.30	29.47	885.12
1731.25	H	0.99	20.13	8.38	27.52	564.94
	V	0.99	22.05	8.38	29.44	879.02
1753.75	H	1.09	20.30	8.45	27.66	583.45
	V	1.09	22.33	8.45	29.69	931.11

Remake: 1. ERP/EIRP= SG Reading +Amp-C.L. +Gain

### 3. Field Strength of Spurious Radiation

#### 3.1. Limit

§ 27.53(g) For operation in the 1710 ~ 1755 MHz and 2110 ~ 2155 MHz bands, the power of any emission outside a license's block shall be attenuated below the transmitting (P) by a factor of at least  $43+10\log(P)$  dB.


#### 3.2. Test Procedure

1. On a test site, the EUT shall be placed at 0.8cm height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a horn (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the large of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary
18. Spurious radiated emission was tested under RC1/SO55 (AWS)


---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

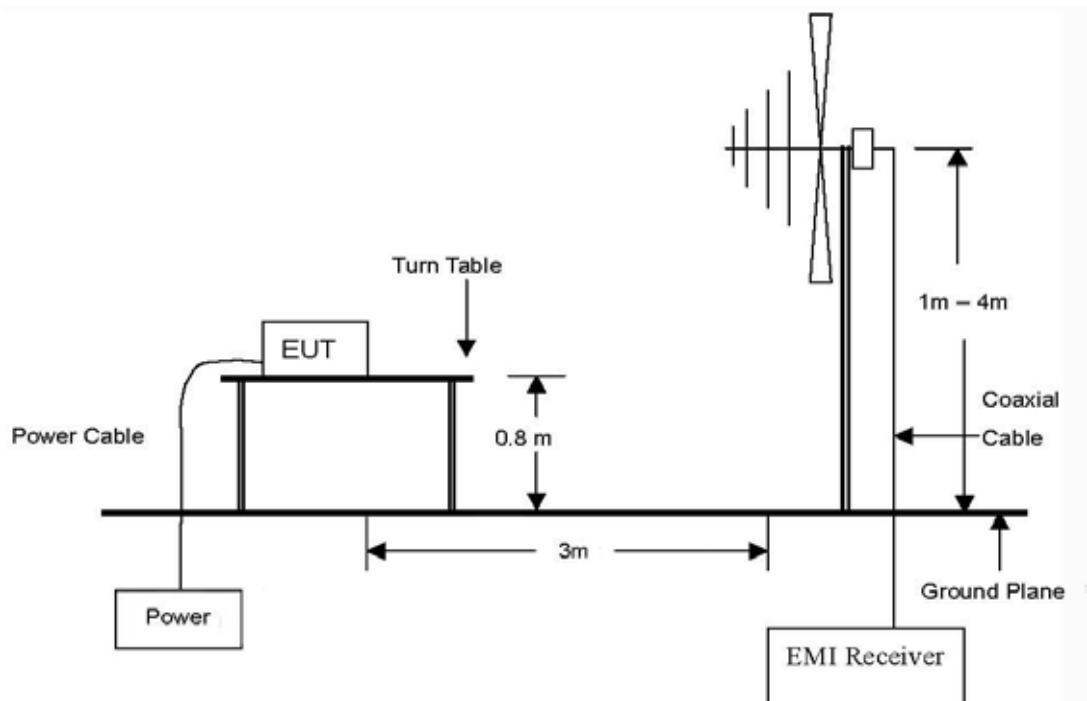

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 18 GHz Emissions.

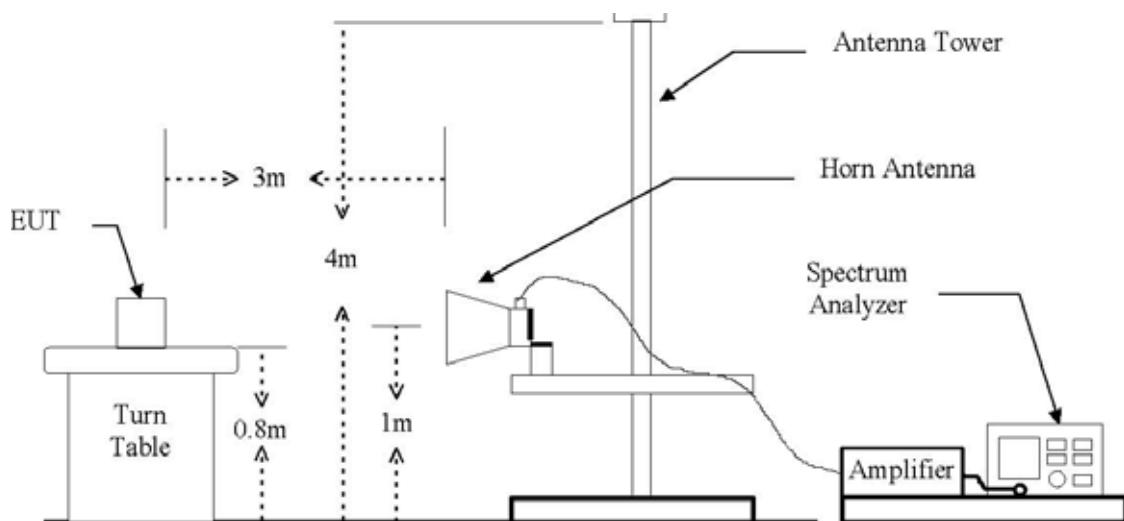

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3.3. Test Result

Ambient temperature : 21      Relative humidity : 48 % R.H.

#### AWS

Frequency (MHz)	Ant.Pol. (H/V)	S.G. reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)
<b>TX LOW channel (1711.25 MHz)</b>								
3422.50	H	-40.80	2.87	10.95	8.80	-32.72	-13.00	19.72
	V	-44.15	2.87	10.95	8.80	-36.07	-13.00	23.07
<b>TX MID Channel (1731.25 MHz)</b>								
3462.50	H	-46.59	2.43	10.99	8.84	-38.03	-13.00	25.03
	V	-49.18	2.43	10.99	8.84	-40.62	-13.00	27.62
<b>TX HIGH Channel (1753.75 MHz)</b>								
3507.50	H	-39.90	2.19	11.03	8.88	-31.06	-13.00	18.06
	V	-44.90	2.19	11.03	8.88	-36.06	-13.00	23.06

Remake: 1. No more harmonic above 2<sup>rd</sup> harmonic for all channel.

2. EIRP= SG Reading -Cable Loss +Gain


## 4. Conducted Output Power

### 4.1. Limit

Requirements: CFR 47, Section §2.1046

### 4.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The Agilent 8960 Test Set has the following procedure.
  - Call Setup >Shift & Preset - Protocol Rev >6 (IS-2000-0)
  - Radio Config.(RC)>RC 11(Fwd1, Rvs1)
  - Traffic Data Rate > Full - Cell Info > Cell Parameters >Primary Ch (425: AWS)
3. Once "Active Cell" show "Connected" then change "Rvs. Power Ctrl" from " Active bits" to "All Up bits" to get the maximum power.

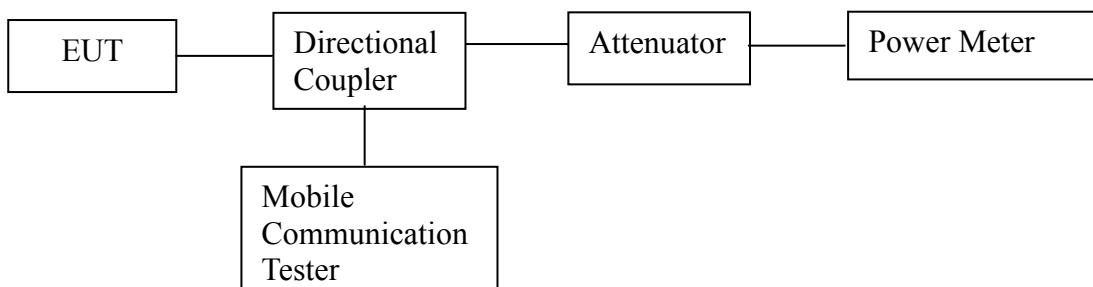

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

#### 4.3. Test Results

Ambient temperature : 23      Relative humidity : 46 %R.H.

#### Conducted Average Power Output Table (CDMA 1xRTT)

Band	Channel	CDMA2000 RC	S02 (dBm)	S09 (dBm)	S032(+SCH) (dBm)	S032(+F-SCH) (dBm)	S055 (dBm)
AWS	Middle(425)	(Fwd1,Rvs1)	23.84				<b>23.95</b>
		(Fwd2,Rvs2)		23.72			23.64
		(Fwd3,Rvs3)	23.66		23.70	23.65	23.57
		(Fwd4,Rvs3)	23.53		23.78	23.72	23.73
		(Fwd5,Rvs4)		23.66			23.70

Remake: RF Power measurements were made in 'closed' position.

#### AWS (1xRTT)

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (mW)	Limit (W)
Low(25)	1711.25	23.56	227	1
Middle(425)	1731.25	23.95	248	1
High(875)	1753.75	23.50	224	1

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*