



Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

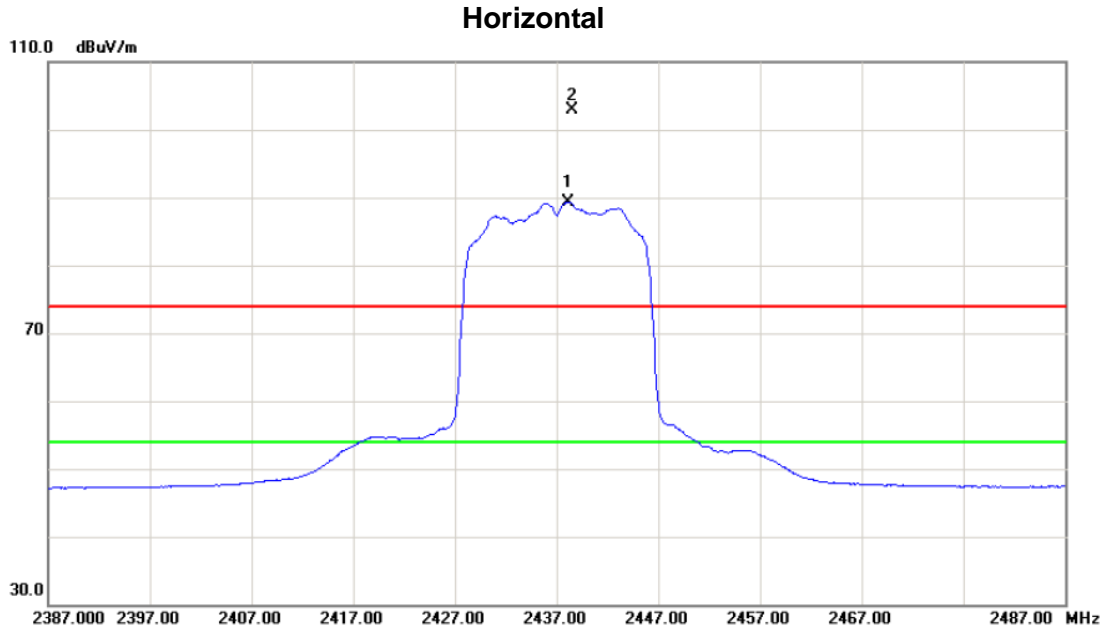

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2438.100	55.82	33.50	89.32	54.00	35.32	AVG	Fundamental frequency, no limit
2	X	2438.500	69.50	33.50	103.00	74.00	29.00	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

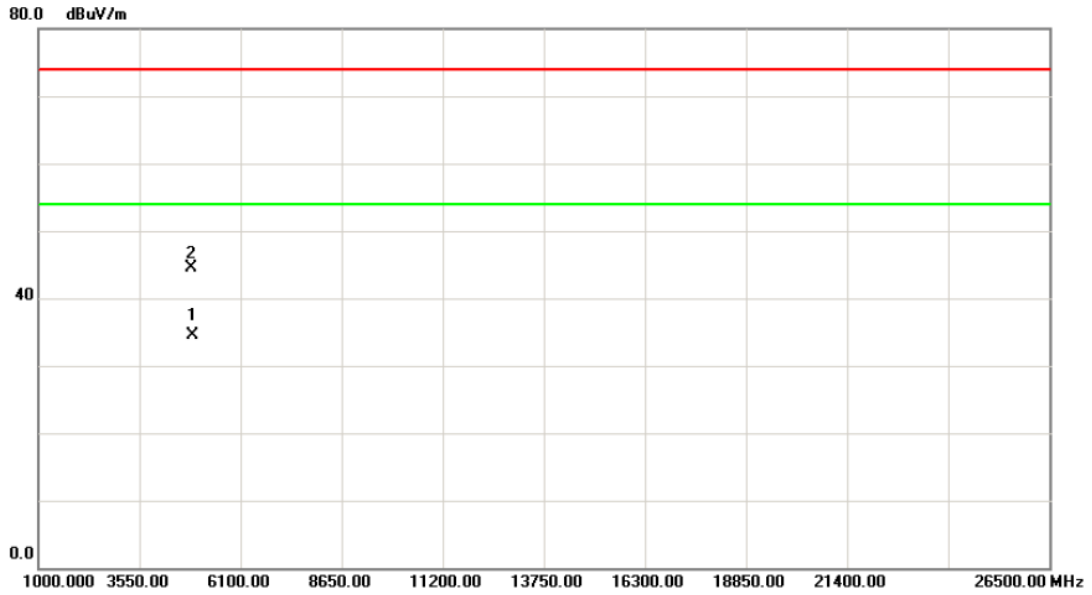

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4873.890	27.87	6.55	34.42	54.00	-19.58	AVG	
2		4874.000	37.96	6.55	44.51	74.00	-29.49	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

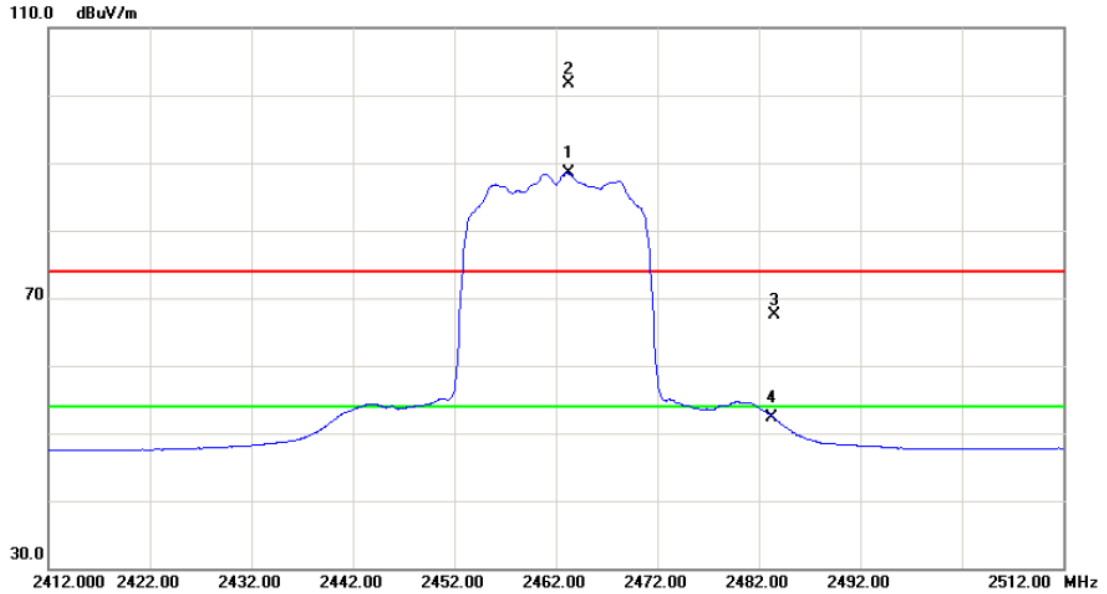

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2463.200	54.94	33.57	88.51	54.00	34.51	AVG	Fundamental frequency, no limit
2	X	2463.300	68.06	33.57	101.63	74.00	27.63	peak	Fundamental frequency, no limit
3		2483.500	33.80	33.62	67.42	74.00	-6.58	peak	
4		2483.500	18.72	33.62	52.34	54.00	-1.66	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

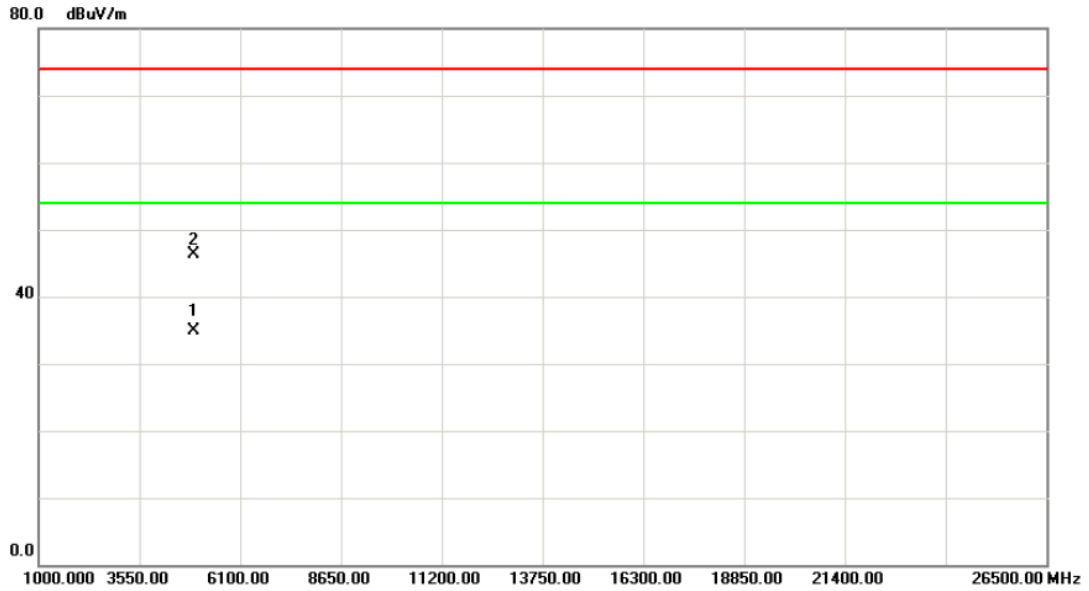

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4923.970	28.15	6.66	34.81	54.00	-19.19	AVG	
2		4924.110	39.71	6.66	46.37	74.00	-27.63	peak	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

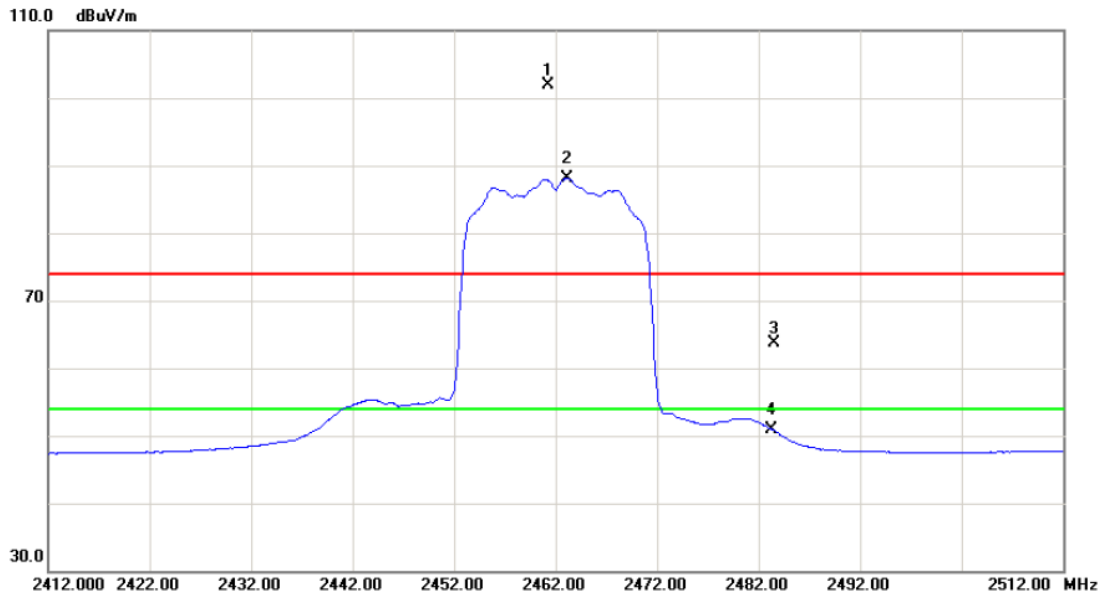

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.300	68.28	33.56	101.84	74.00	27.84	peak	Fundamental frequency, no limit
2	*	2463.100	54.55	33.57	88.12	54.00	34.12	AVG	Fundamental frequency, no limit
3		2483.500	30.05	33.62	63.67	74.00	-10.33	peak	
4		2483.500	17.20	33.62	50.82	54.00	-3.18	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

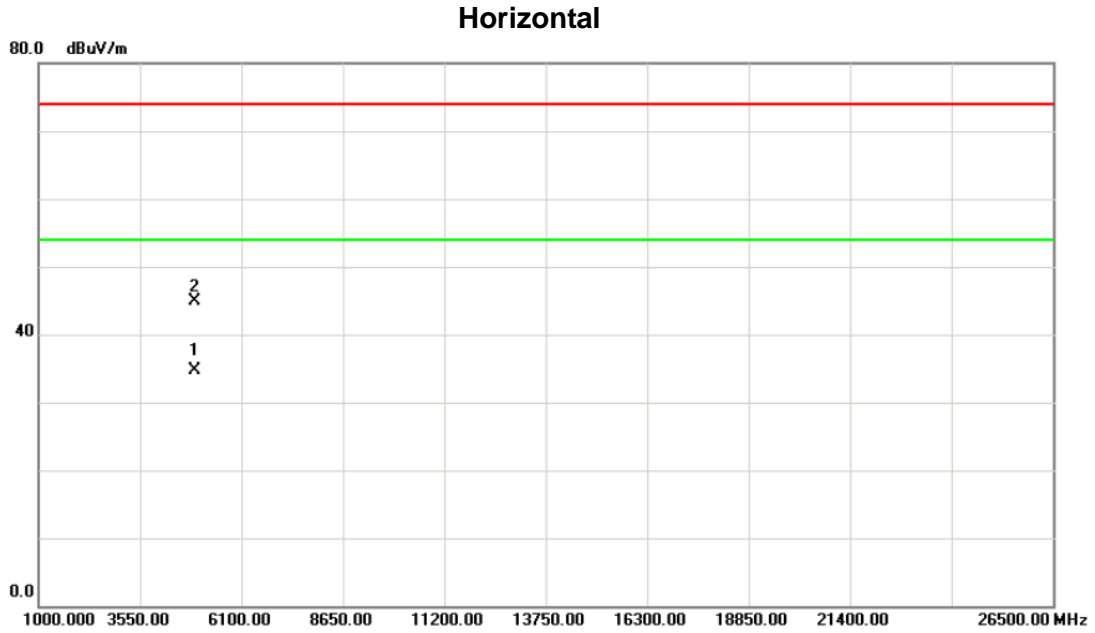

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4923.880	27.96	6.66	34.62	54.00	-19.38	AVG	
2		4924.110	38.25	6.66	44.91	74.00	-29.09	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical

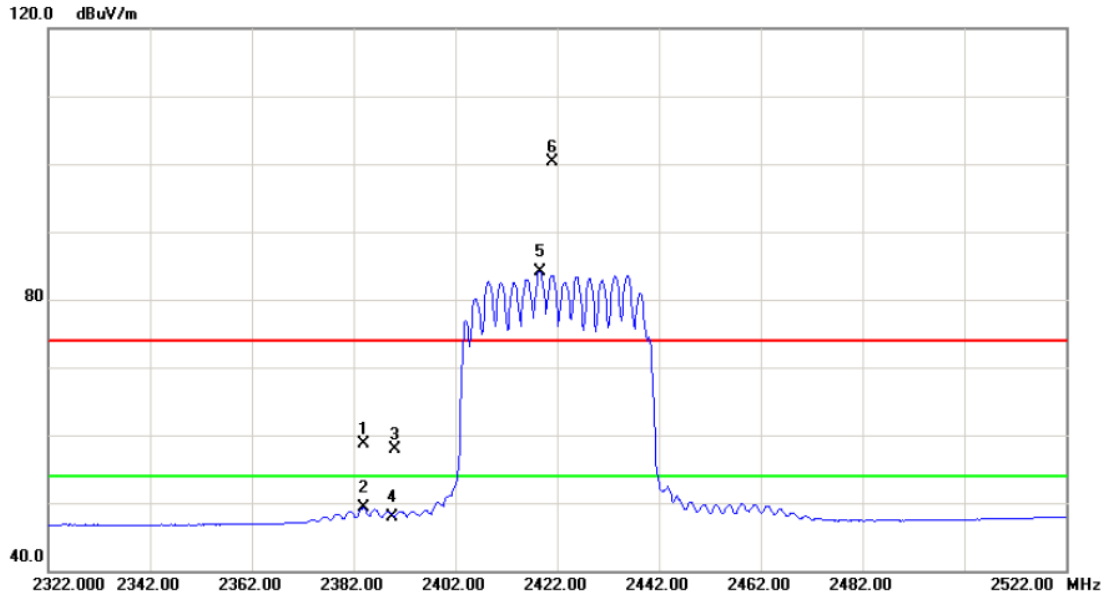

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2384.000	25.25	33.37	58.62	74.00	-15.38	peak	
2		2384.000	15.87	33.37	49.24	54.00	-4.76	AVG	
3		2390.000	24.53	33.38	57.91	74.00	-16.09	peak	
4		2390.000	14.50	33.38	47.88	54.00	-6.12	AVG	
5	*	2418.600	50.60	33.45	84.05	54.00	30.05	AVG	Fundamental frequency, no limit
6	X	2421.000	66.90	33.46	100.36	74.00	26.36	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical

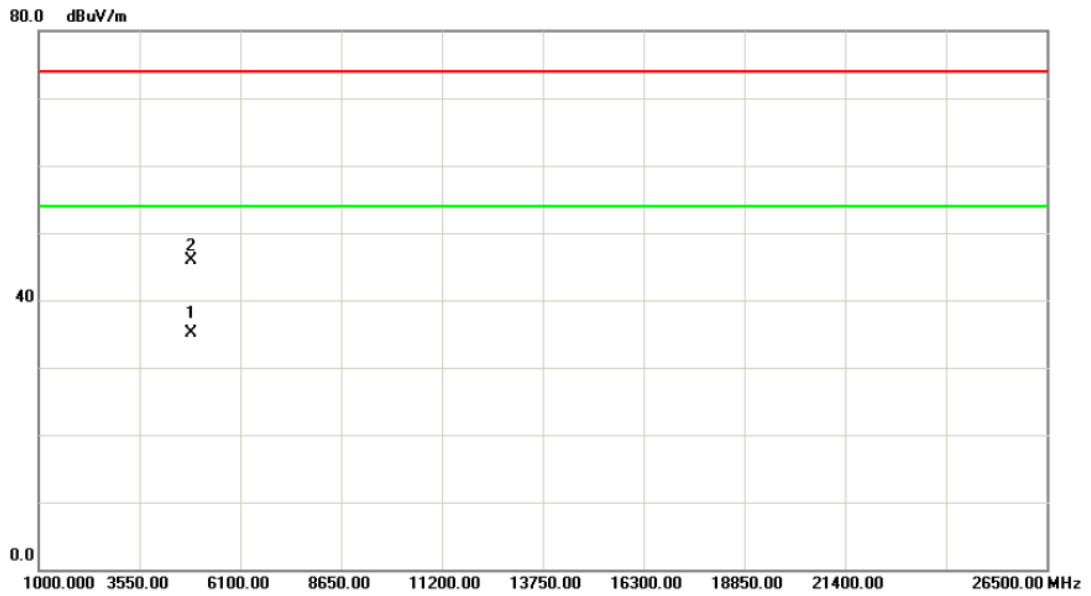

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4844.000	28.53	6.48	35.01	54.00	-18.99	AVG	
2		4844.100	39.36	6.48	45.84	74.00	-28.16	peak	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal

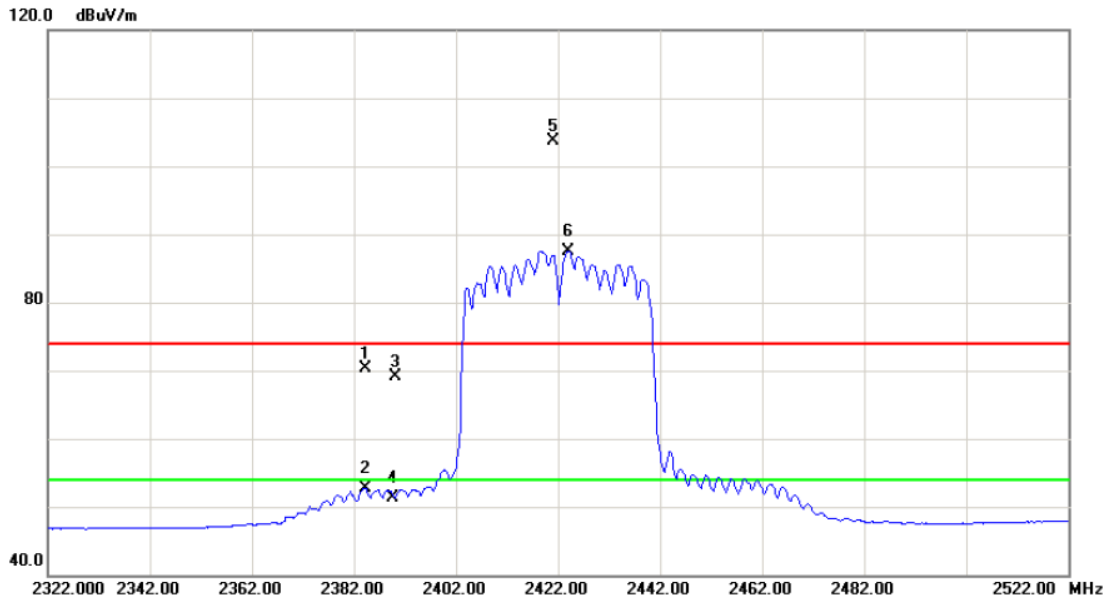

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2384.200	36.84	33.37	70.21	74.00	-3.79	peak	
2		2384.200	19.33	33.37	52.70	54.00	-1.30	AVG	
3		2390.000	35.65	33.38	69.03	74.00	-4.97	peak	
4		2390.000	17.90	33.38	51.28	54.00	-2.72	AVG	
5	X	2421.000	70.34	33.46	103.80	74.00	29.80	peak	Fundamental frequency, no limit
6	*	2424.000	54.09	33.47	87.56	54.00	33.56	AVG	Fundamental frequency, no limit


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

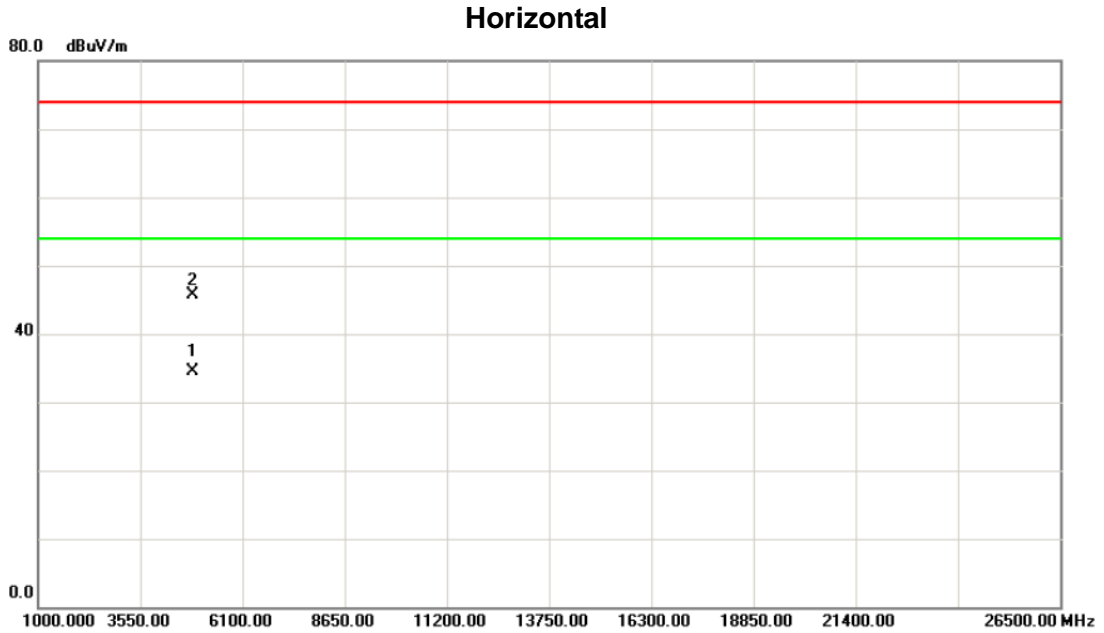

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4843.920	28.04	6.48	34.52	54.00	-19.48	AVG	
2		4844.000	39.23	6.48	45.71	74.00	-28.29	peak	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical

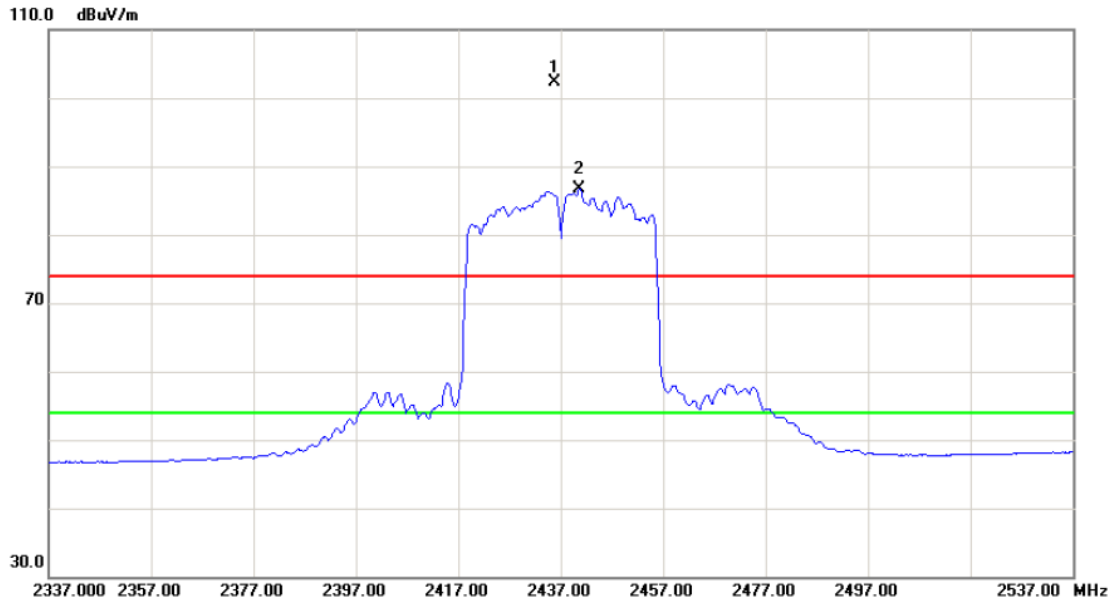


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2435.800	68.80	33.50	102.30	74.00	28.30	peak	Fundamental frequency, no limit
2	*	2440.600	53.18	33.51	86.69	54.00	32.69	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

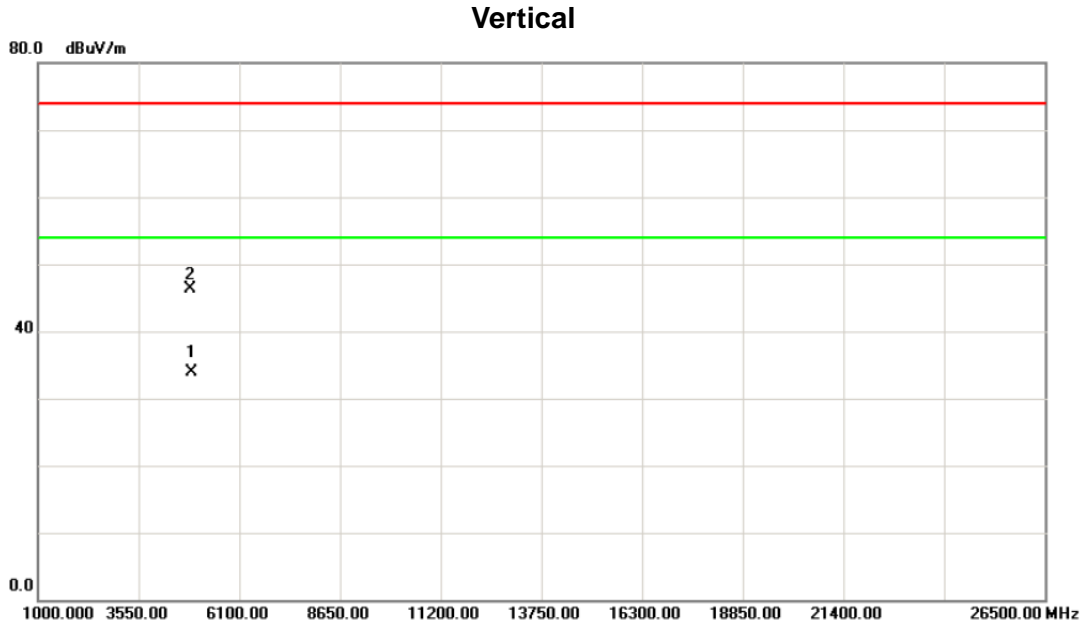

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4874.100	27.42	6.55	33.97	54.00	-20.03	AVG	
2		4874.300	39.72	6.55	46.27	74.00	-27.73	peak	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

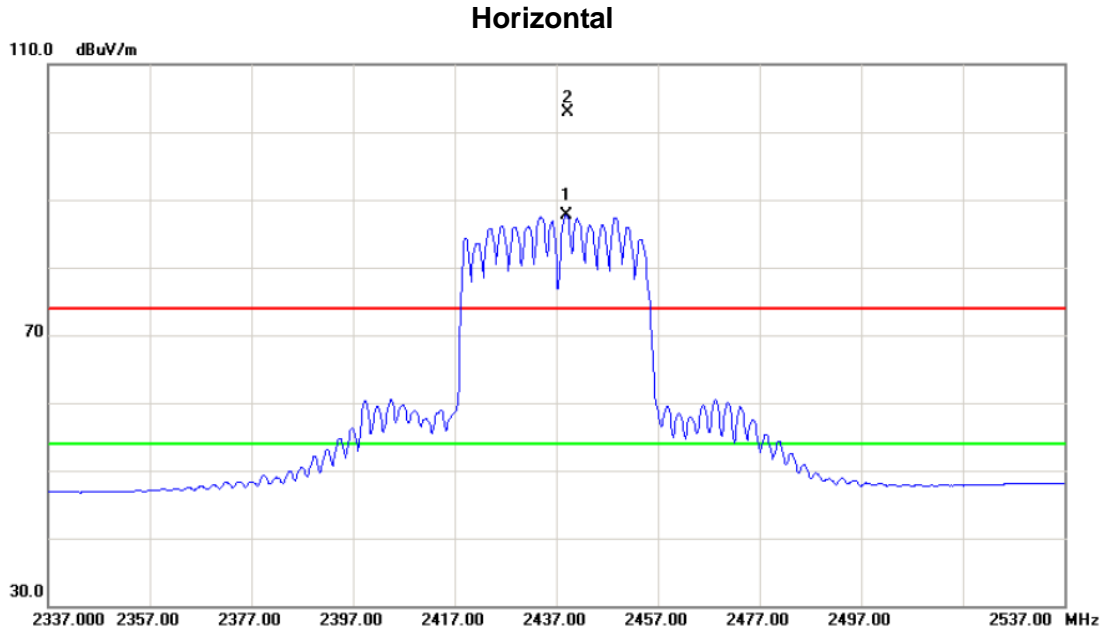

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2439.000	54.28	33.51	87.79	54.00	33.79	AVG	Fundamental frequency, no limit
2	X	2439.200	69.47	33.51	102.98	74.00	28.98	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

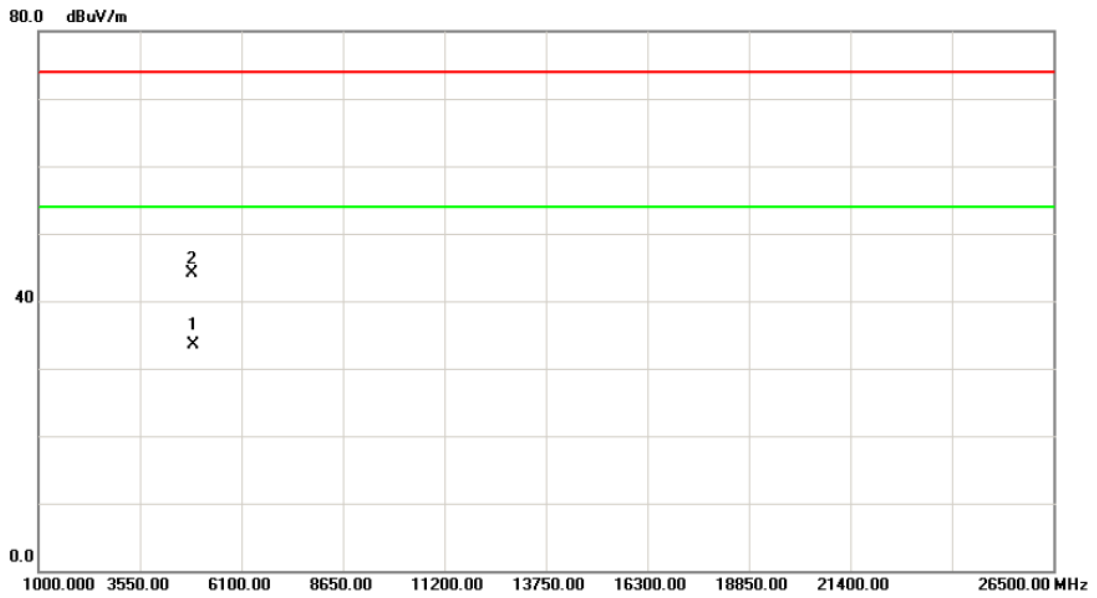

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4873.890	26.92	6.55	33.47	54.00	-20.53	AVG	
2		4874.010	37.56	6.55	44.11	74.00	-29.89	peak	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

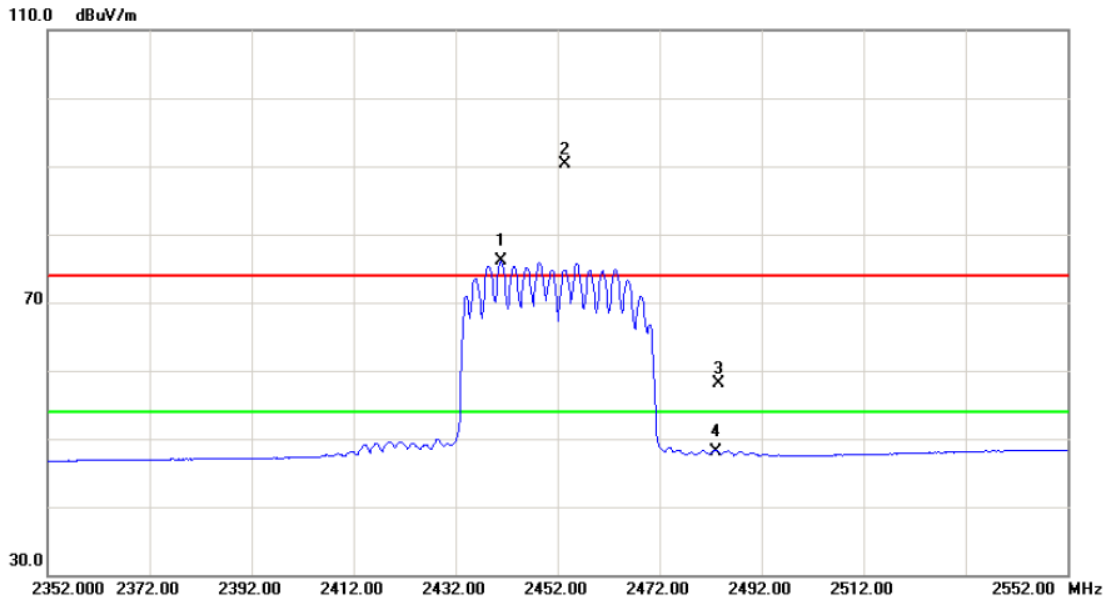


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2440.800	42.65	33.51	76.16	54.00	22.16	AVG	Fundamental frequency, no limit
2	X	2453.400	56.79	33.54	90.33	74.00	16.33	peak	Fundamental frequency, no limit
3		2483.500	24.40	33.62	58.02	74.00	-15.98	peak	
4		2483.500	14.39	33.62	48.01	54.00	-5.99	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

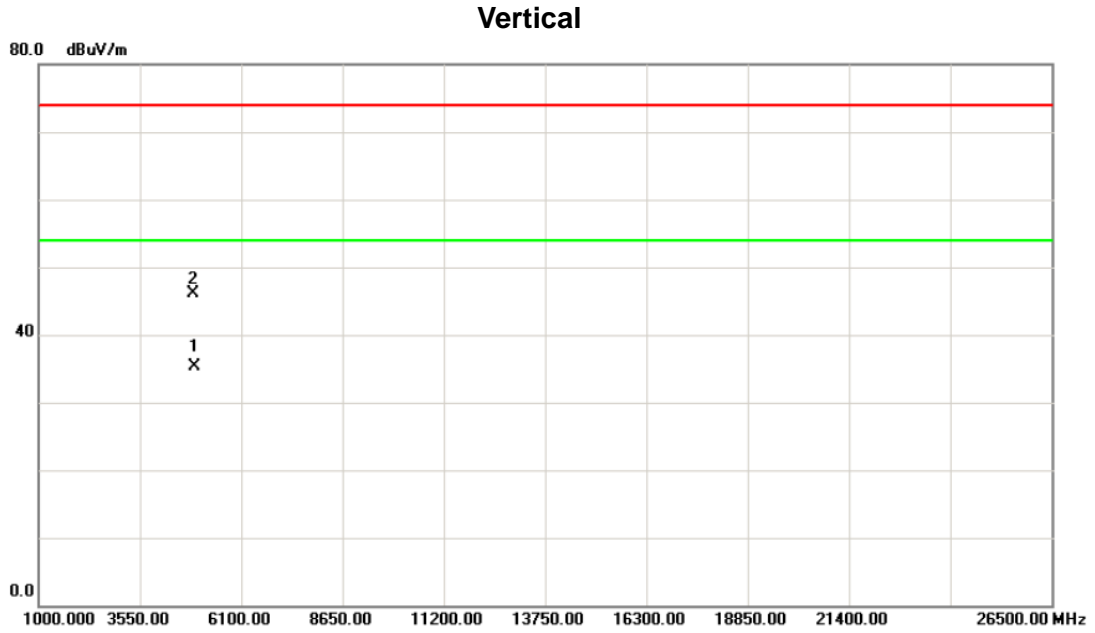

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4903.960	28.60	6.61	35.21	54.00	-18.79	AVG	
2		4904.100	39.56	6.61	46.17	74.00	-27.83	peak	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

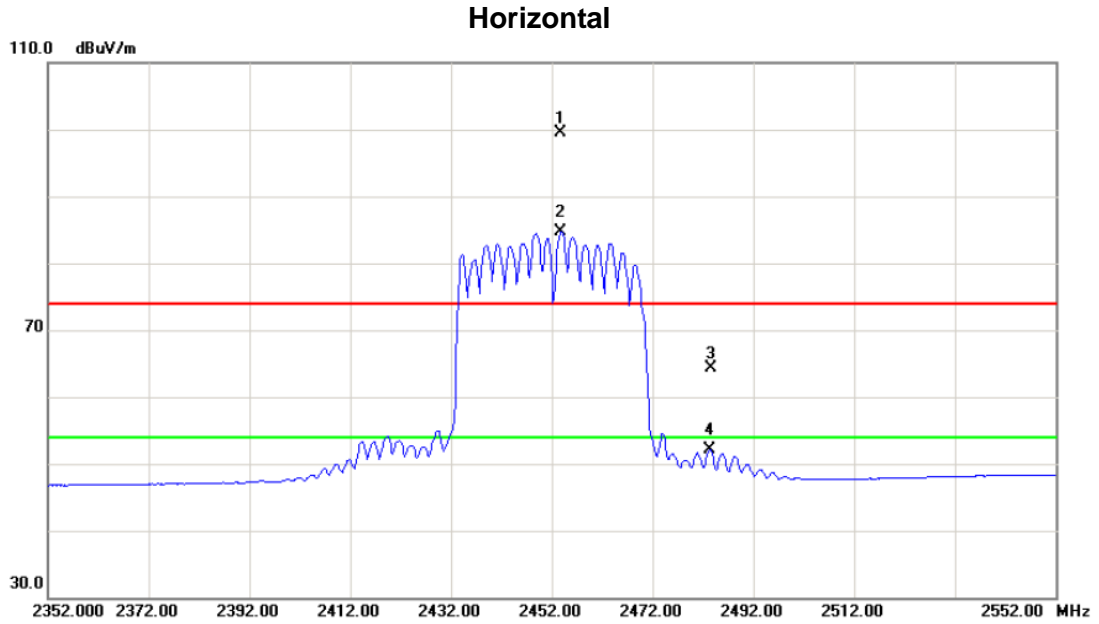

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2453.800	65.94	33.54	99.48	74.00	25.48	peak	Fundamental frequency, no limit
2	*	2453.800	51.21	33.54	84.75	54.00	30.75	AVG	Fundamental frequency, no limit
3		2483.500	30.73	33.62	64.35	74.00	-9.65	peak	
4		2483.500	18.43	33.62	52.05	54.00	-1.95	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

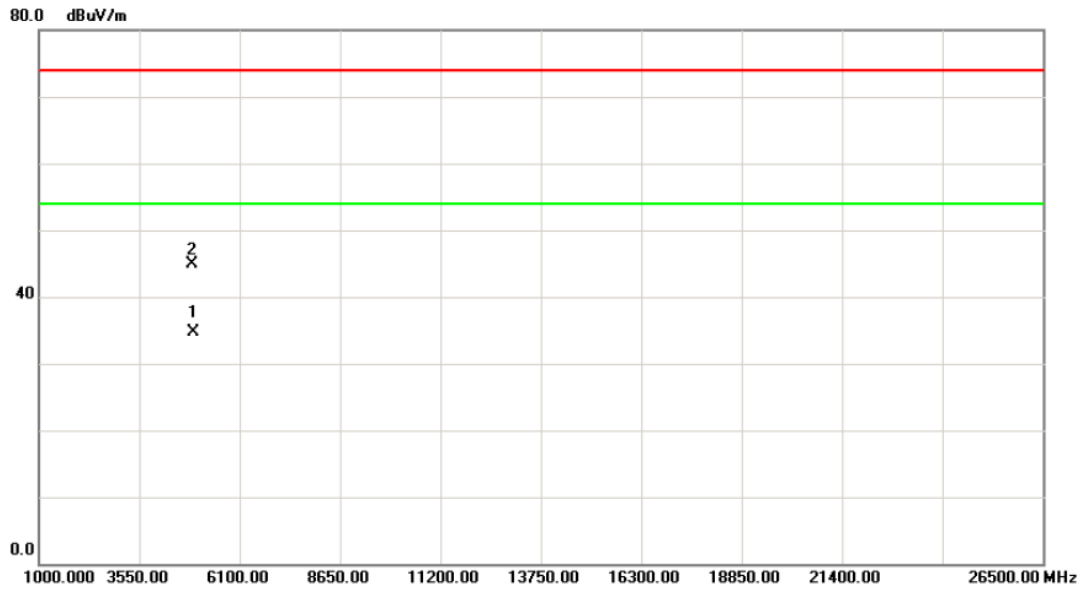


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4903.990	28.01	6.61	34.62	54.00	-19.38	AVG	
2		4904.000	38.20	6.61	44.81	74.00	-29.19	peak	

ATTACHMENT E - BANDWIDTH


Test Mode : TX B Mode_CH01/06/11

TX CH 01

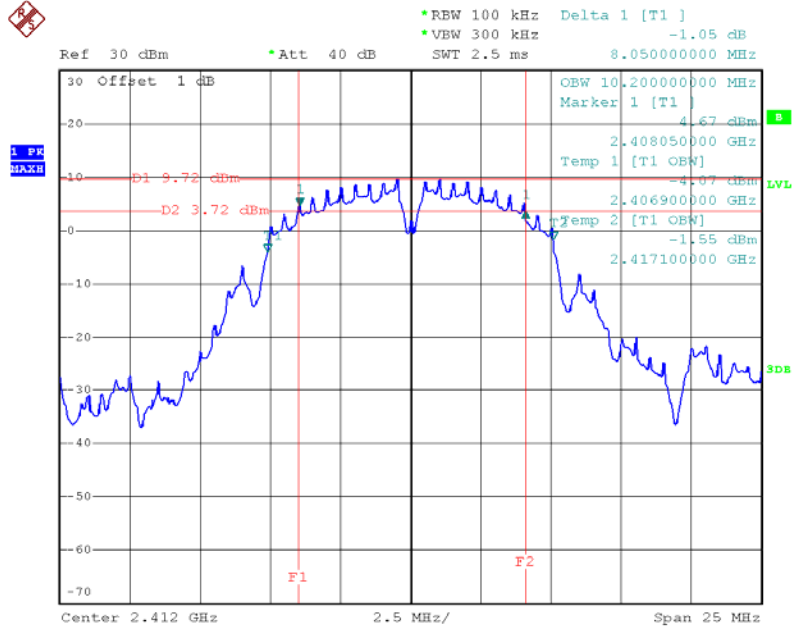


Date: 11.JUN.2014 14:33:40

TX CH 06

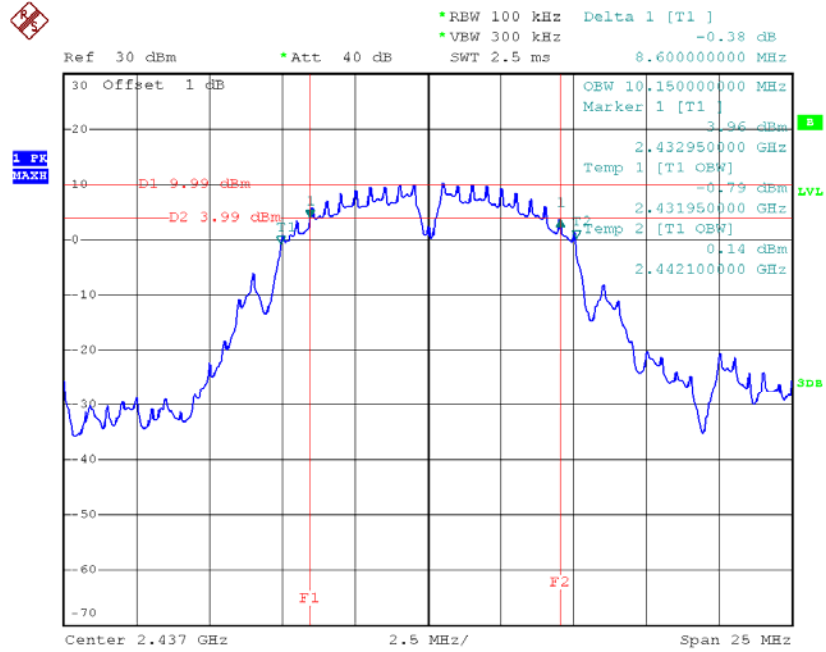

Date: 11.JUN.2014 14:36:01


TX CH 11

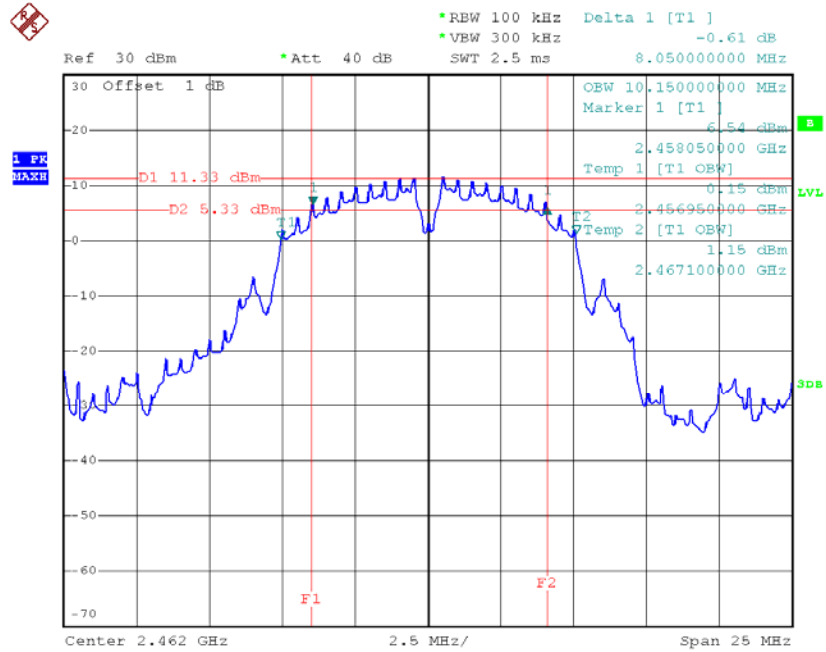

Date: 11.JUN.2014 14:38:16


Test Mode: TX G Mode_CH01/06/11

TX CH 01

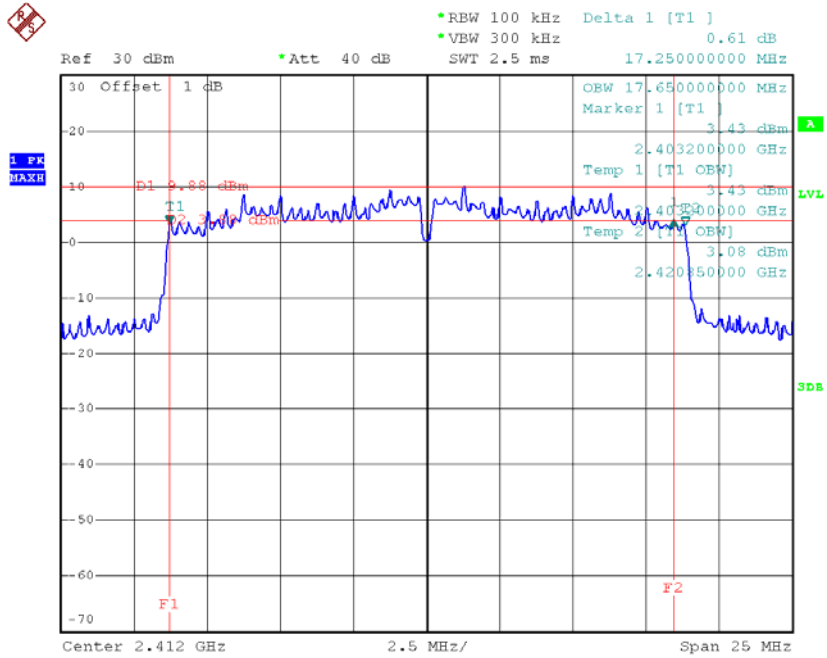


Date: 22.MAY.2014 04:38:37

TX CH 06

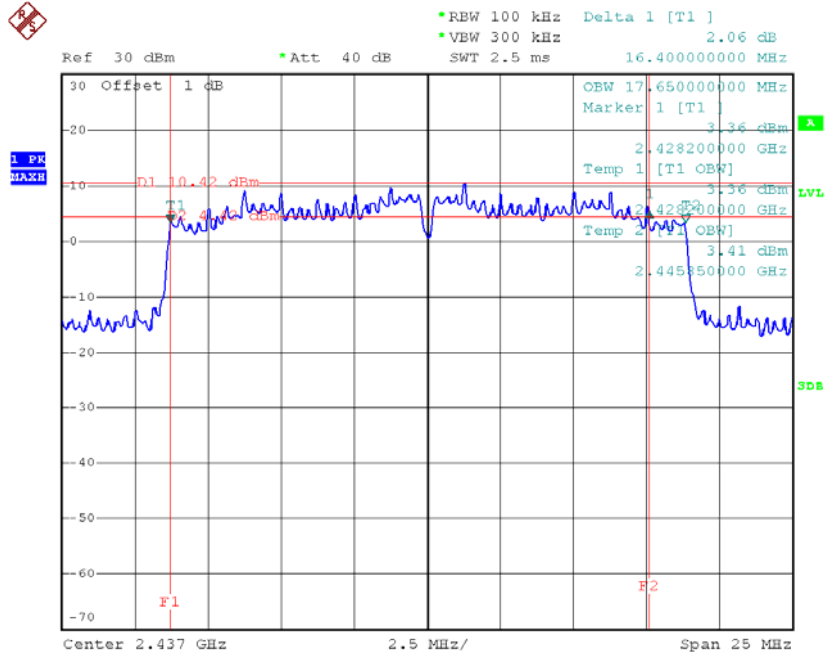

Date: 22.MAY.2014 04:41:06


TX CH 11

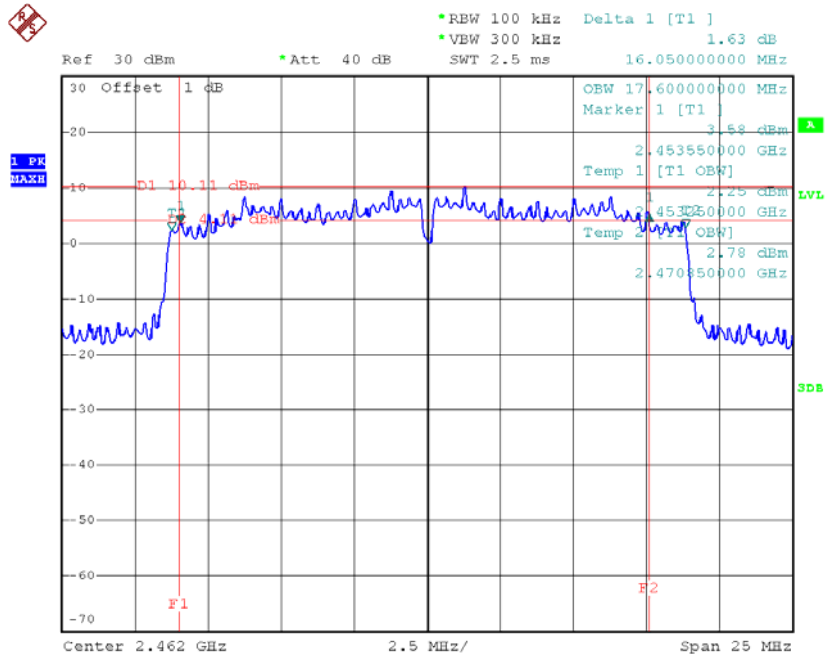

Date: 22.MAY.2014 04:47:04


Test Mode : TX N-20MHz Mode_CH01/06/11_ANT 1

TX CH 01

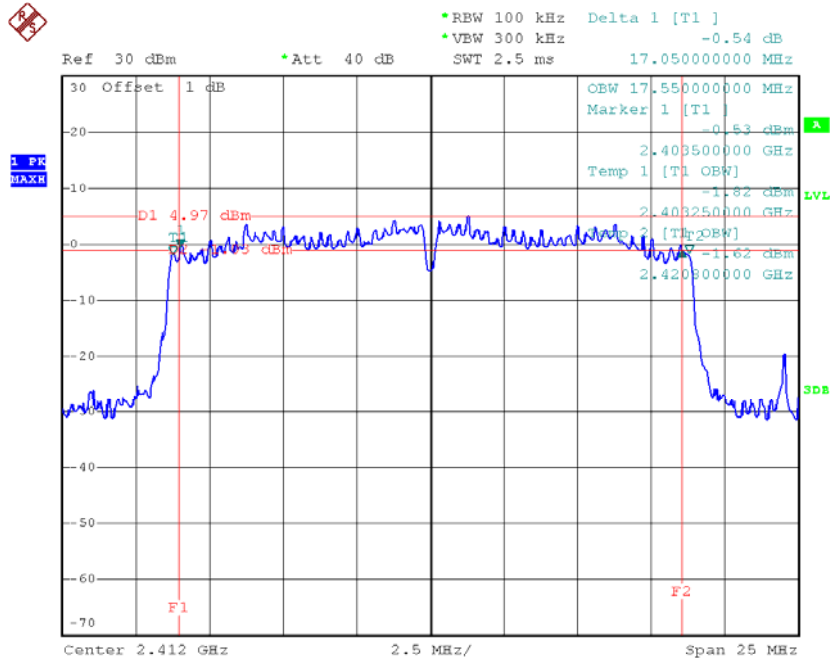


Date: 22.MAY.2014 07:23:47

TX CH 06

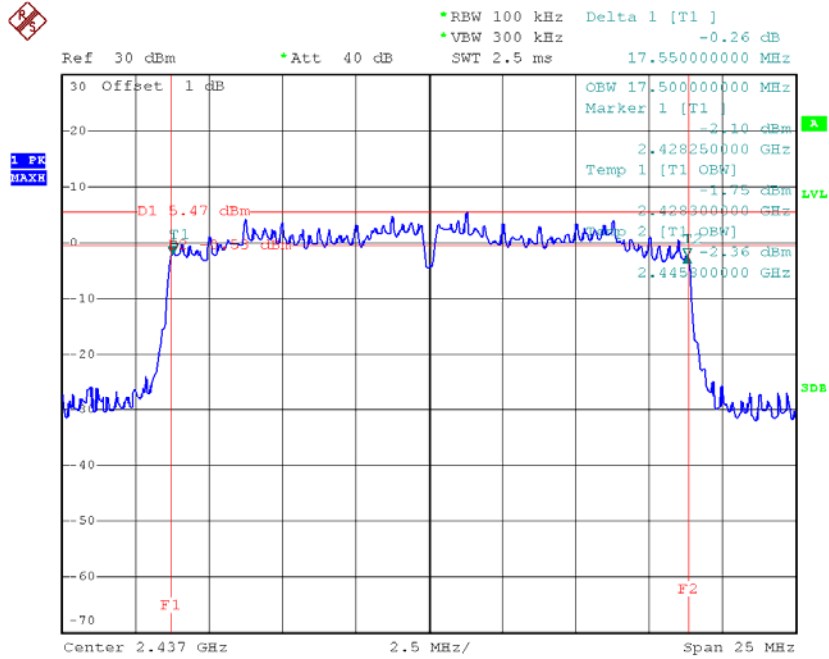

Date: 22.MAY.2014 07:27:46


TX CH 11

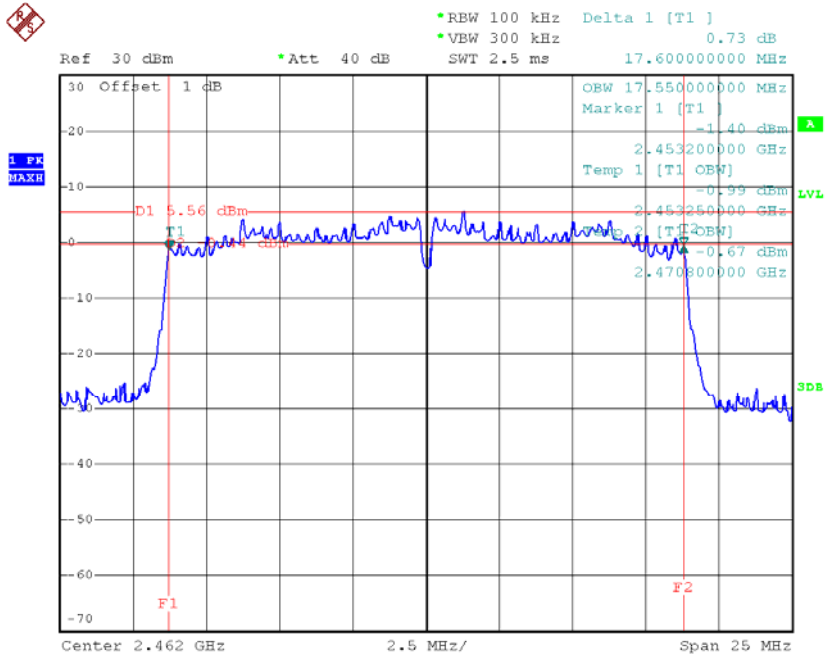

Date: 22.MAY.2014 07:30:29


Test Mode : TX N-20MHz Mode_CH01/06/11_ANT 2

TX CH 01

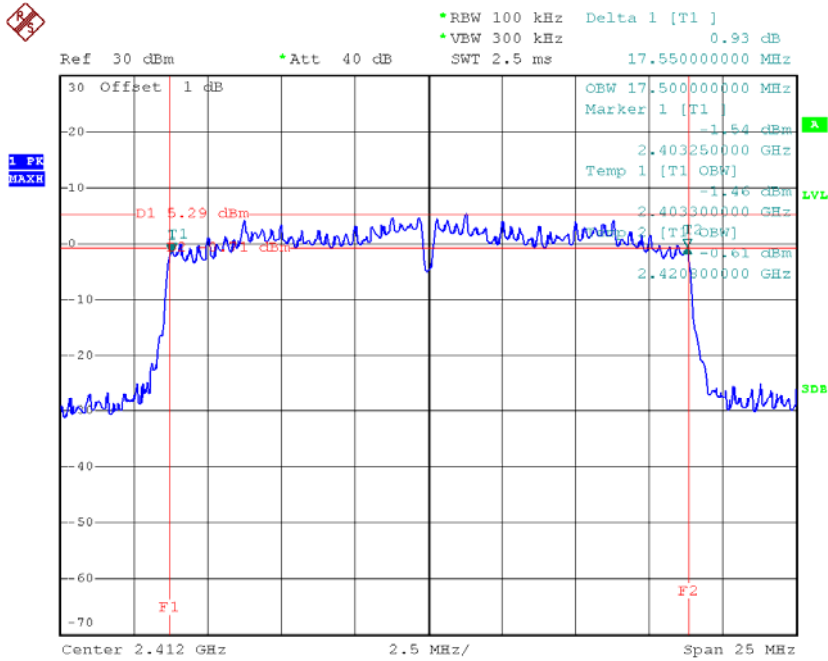


Date: 27.MAY.2014 09:35:29

TX CH 06

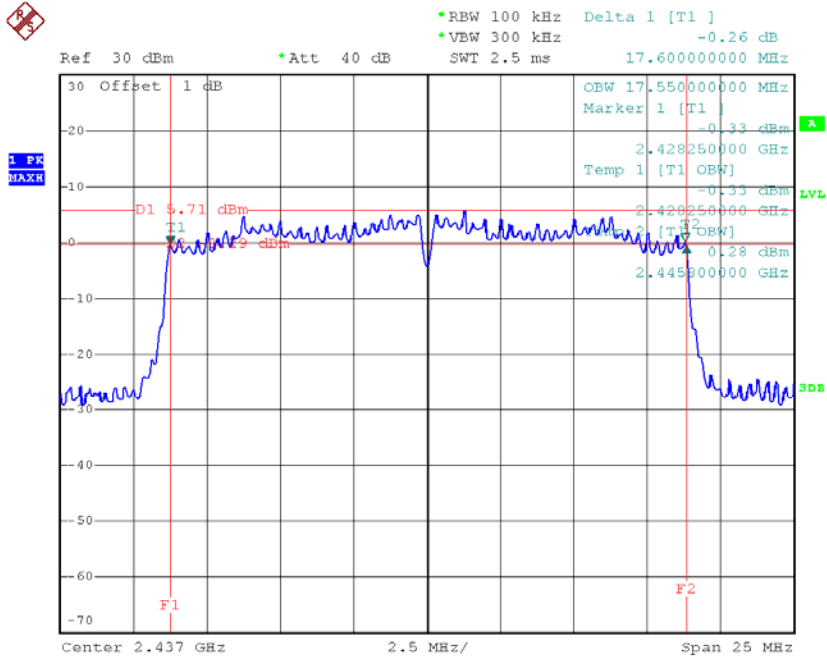

Date: 27.MAY.2014 09:41:18


TX CH 11

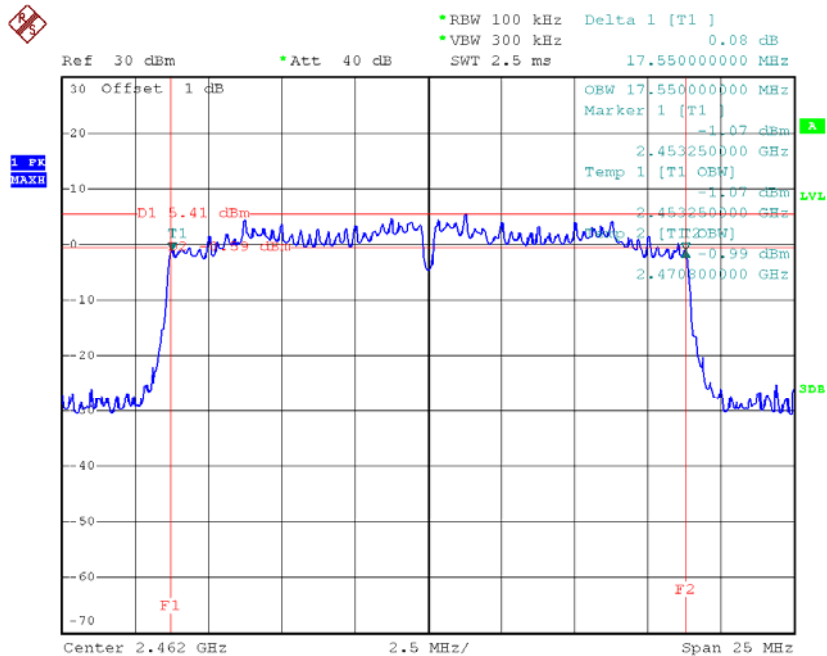

Date: 27.MAY.2014 09:45:31


Test Mode : TX N-40MHz Mode_CH03/06/09_ANT 1

TX CH 03

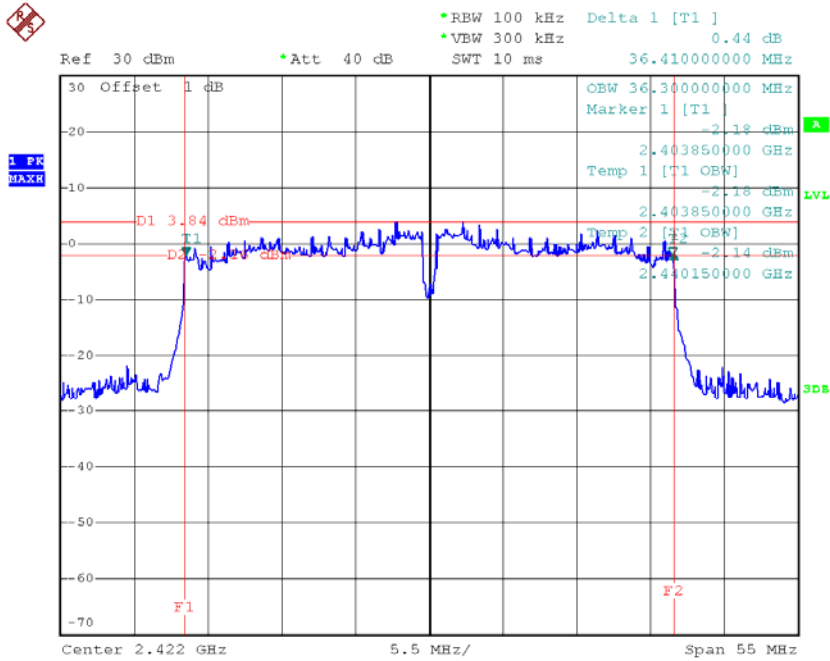


Date: 27.MAY.2014 10:52:03

TX CH 06

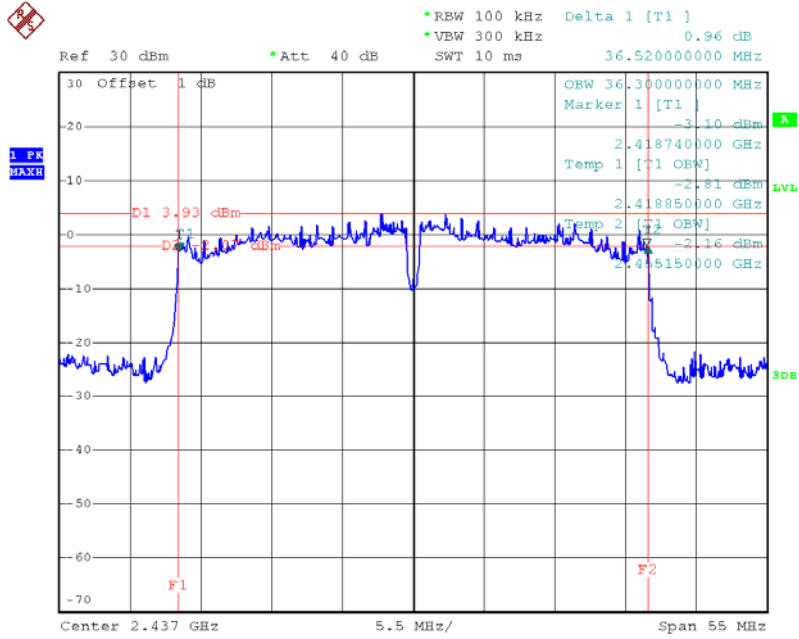

Date: 27.MAY.2014 10:54:12


TX CH 09

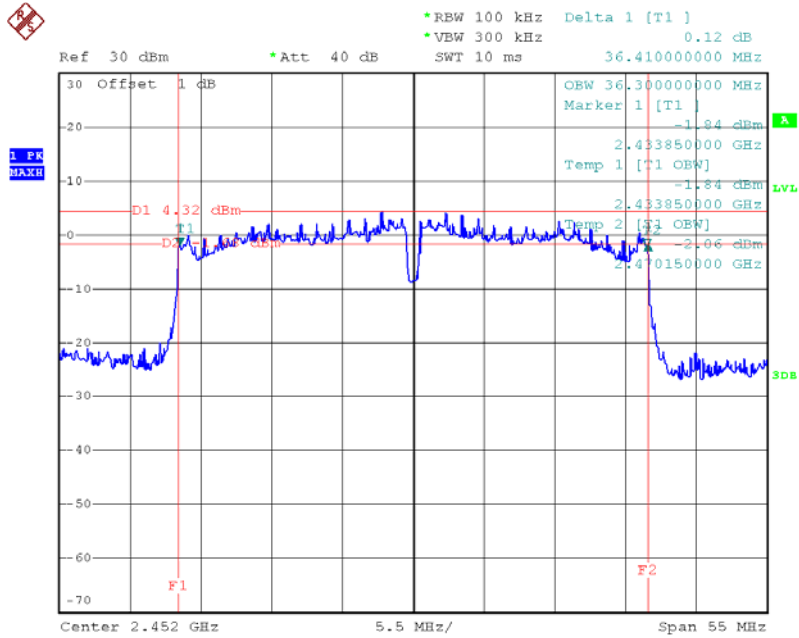

Date: 27.MAY.2014 10:56:38


Test Mode : TX N-40MHz Mode_CH03/06/09_ANT 2

TX CH 03

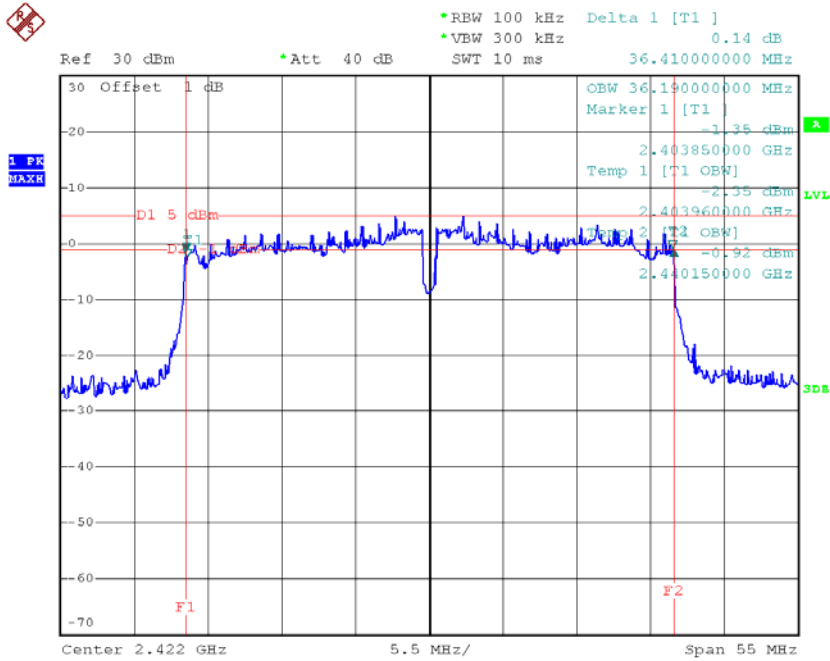


Date: 27.MAY.2014 10:26:46

TX CH 06

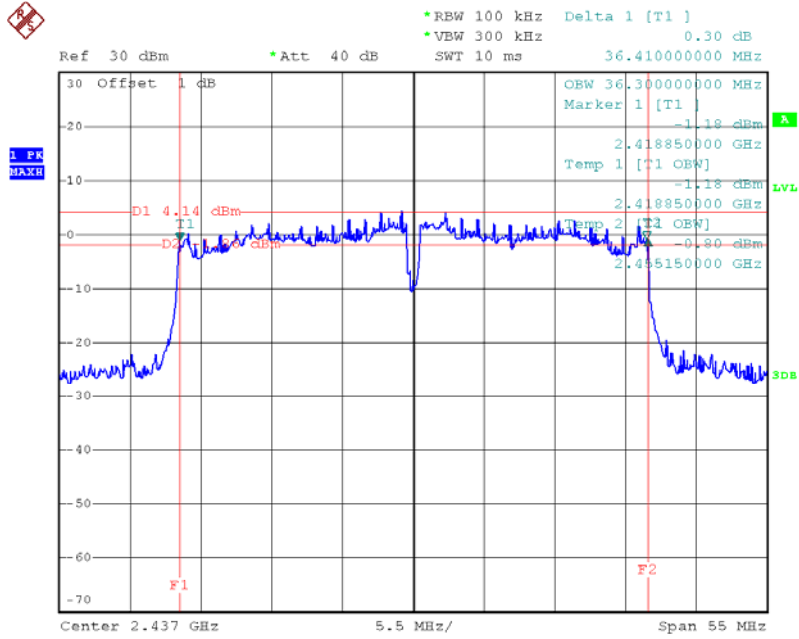

Date: 27.MAY.2014 10:29:59

TX CH 09

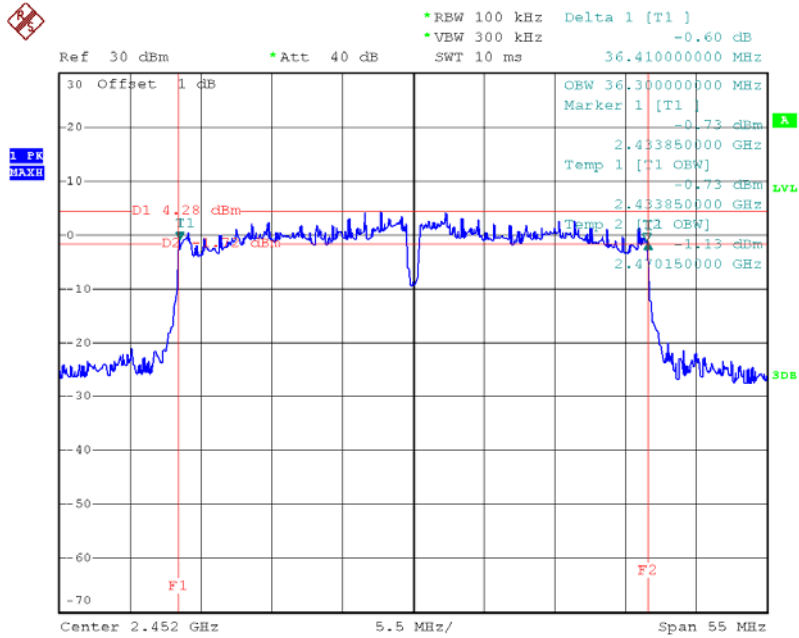

Date: 27.MAY.2014 10:33:29

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode : TX B Mode

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	20.27	30	1
CH06	2437	20.62	30	1
CH11	2462	20.42	30	1

Test Mode : TX G Mode

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	19.90	30	1
CH06	2437	20.38	30	1
CH11	2462	20.70	30	1

Test Mode : TX N-20M Mode_ANT 1				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	20.97	30	1
CH06	2437	20.93	30	1
CH11	2462	20.94	30	1

Test Mode : TX N-20M Mode_ANT 2				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	20.41	30	1
CH06	2437	20.56	30	1
CH11	2462	20.89	30	1

Test Mode : TX N-20M Mode_Total				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	23.71	30	1
CH06	2437	23.76	30	1
CH11	2462	23.93	30	1

Test Mode : TX N-40M Mode_ANT 1				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH03	2422	20.55	30	1
CH06	2437	20.60	30	1
CH09	2452	20.85	30	1


Test Mode : TX N-40M Mode_ANT 2				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH03	2422	20.71	30	1
CH06	2437	20.67	30	1
CH09	2452	20.94	30	1

Test Mode : TX N-40M Mode_Total				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH03	2422	23.64	30	1
CH06	2437	23.65	30	1
CH09	2452	23.91	30	1

**ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS
EMISSION**


Test Mode :	TX B Mode
-------------	-----------

TX B mode CH01

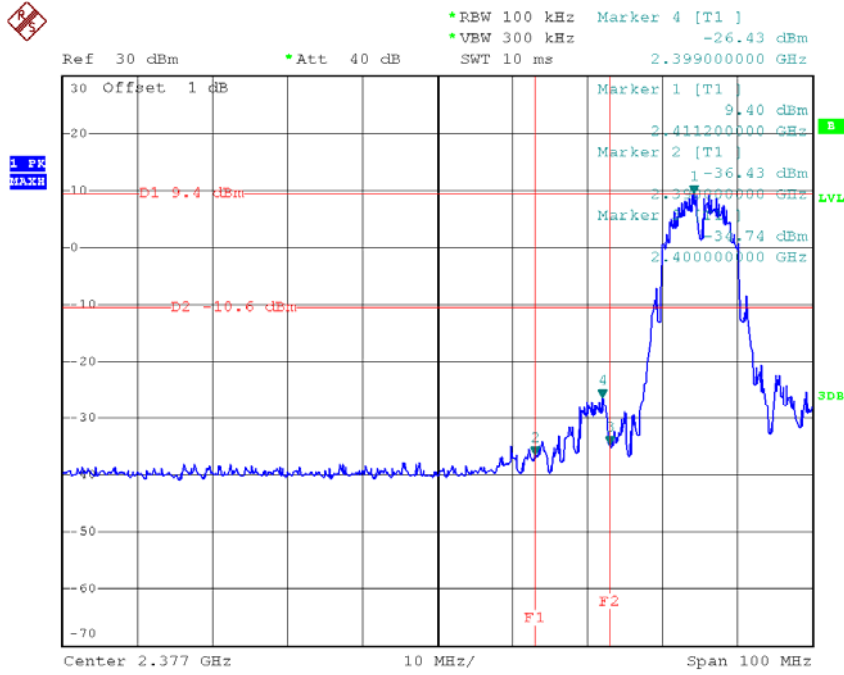


Date: 11.JUN.2014 14:48:32

TX B mode CH11

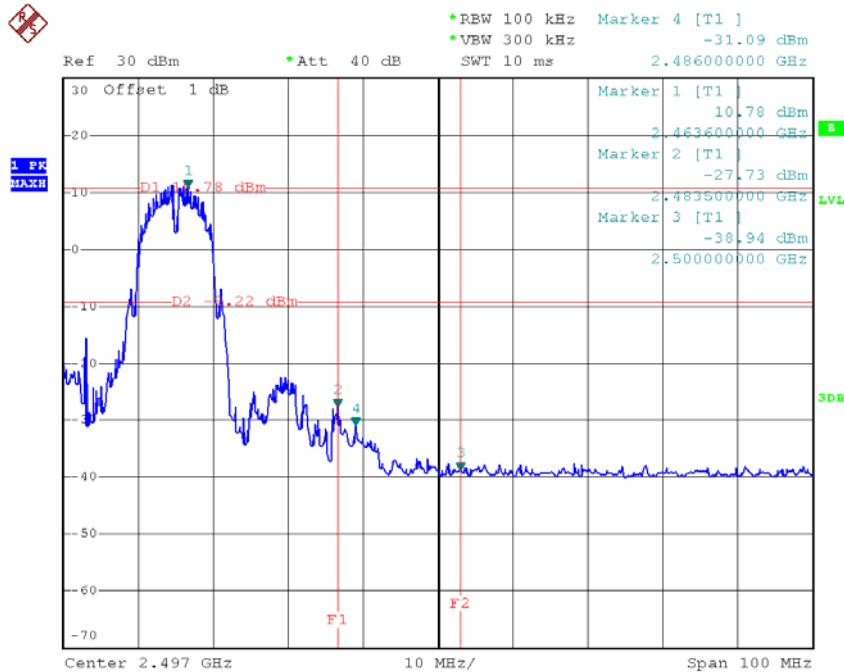


Date: 11.JUN.2014 14:40:43

TX B mode CH01 (30MHz to 1000MHz)

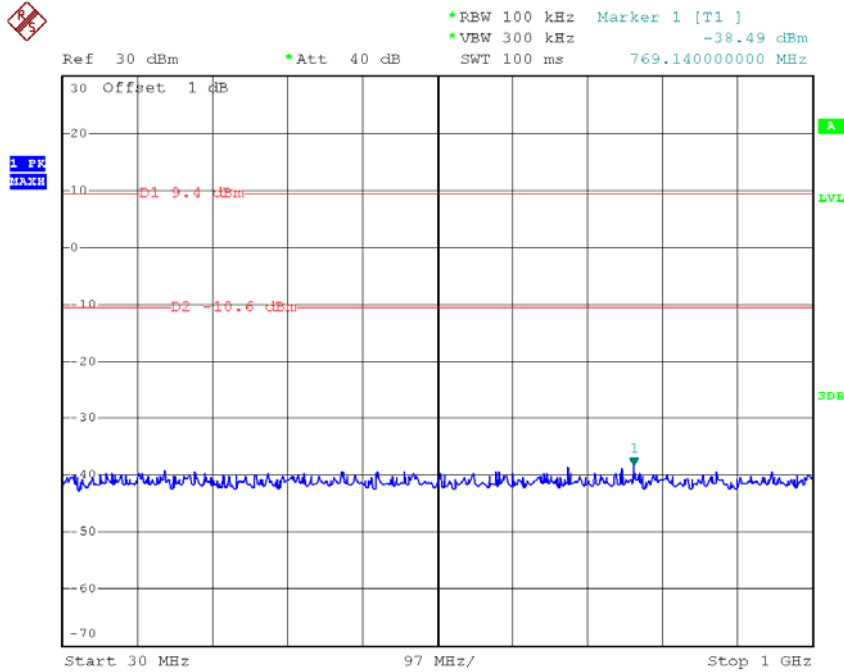


Date: 11.JUN.2014 14:49:00

TX B mode CH01 (1000MHz to 10th Harmonic)

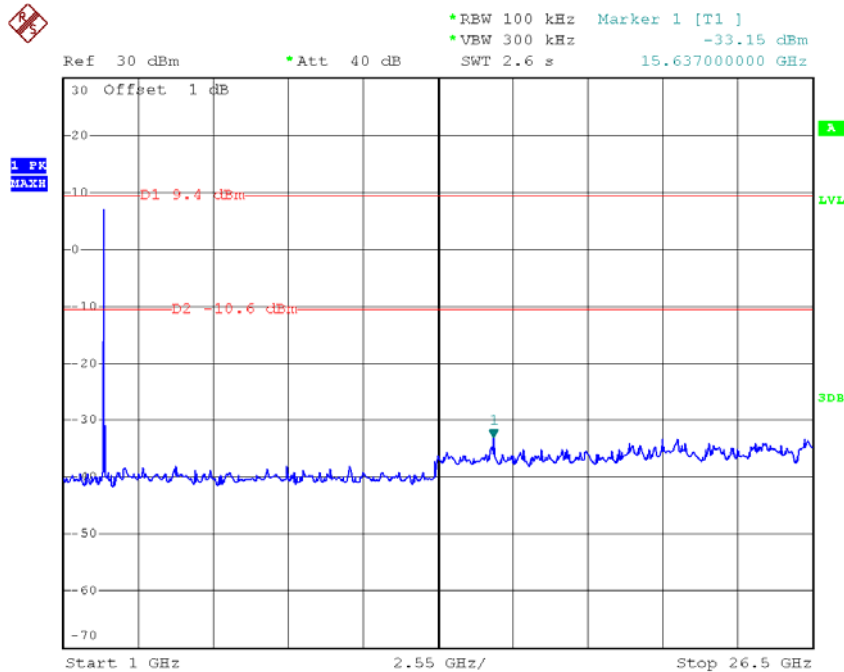


Date: 11.JUN.2014 14:49:17

TX B mode CH06 (30MHz to 1000MHz)

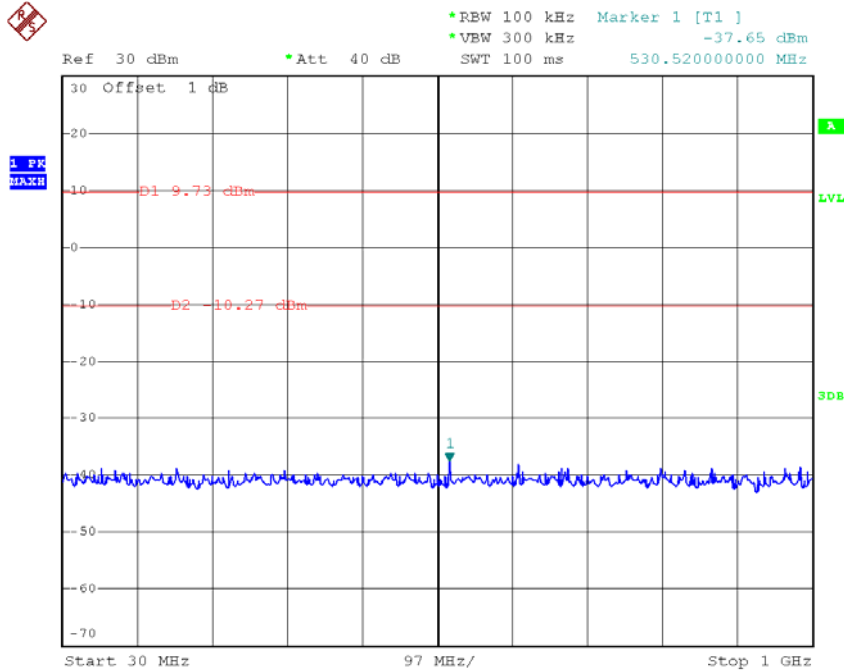


Date: 11.JUN.2014 14:46:20

TX B mode CH06 (1000MHz to 10th Harmonic)

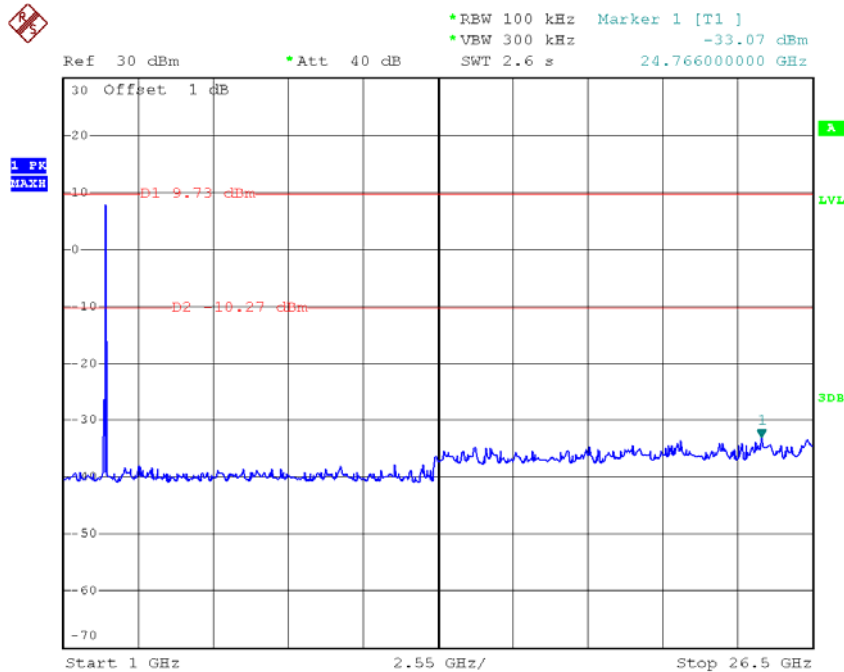


Date: 11.JUN.2014 14:46:40

TX B mode CH11 (30MHz to 1000MHz)

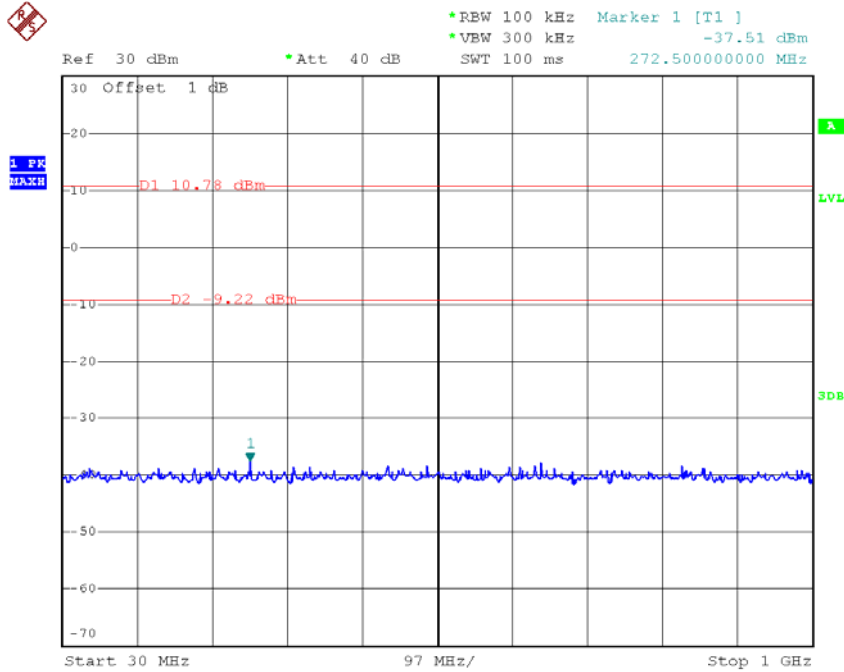

Date: 11.JUN.2014 14:42:31


TX B mode CH11 (1000MHz to 10th Harmonic)

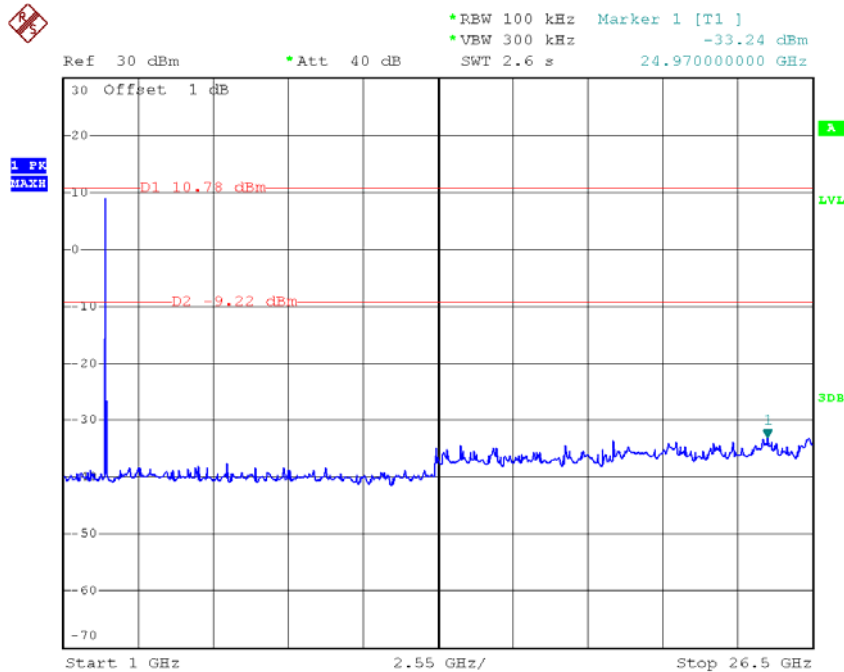

Date: 11.JUN.2014 14:42:51


Test Mode :	TX G Mode
-------------	-----------

TX G mode CH01

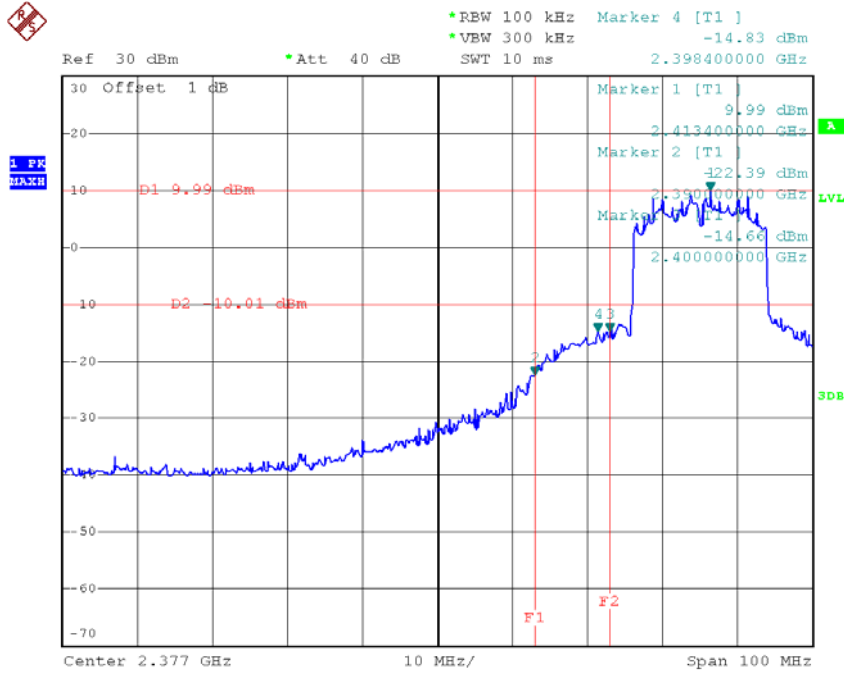


Date: 22.MAY.2014 04:55:51

TX G mode CH11

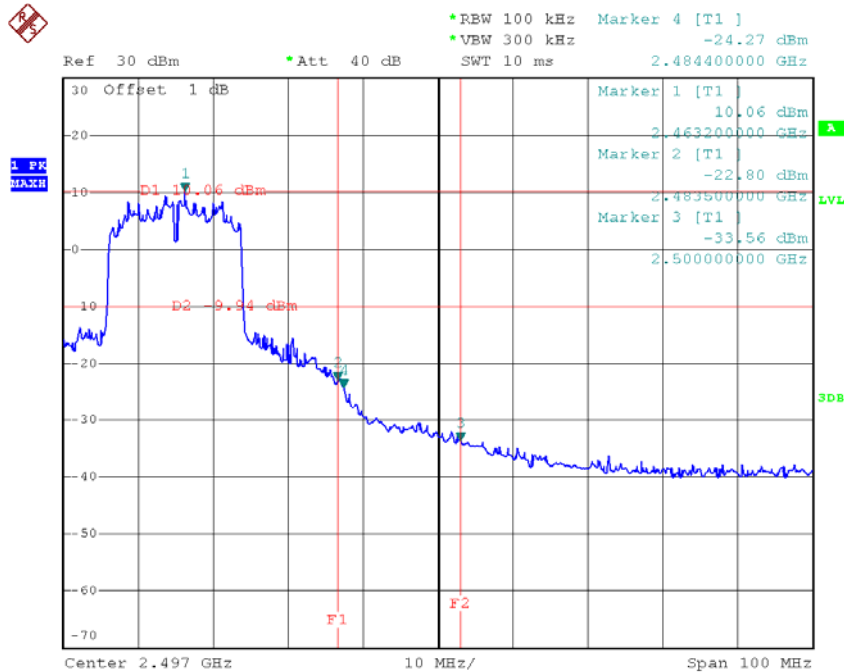


Date: 22.MAY.2014 04:49:18

TX G mode CH01 (30MHz to 1000MHz)

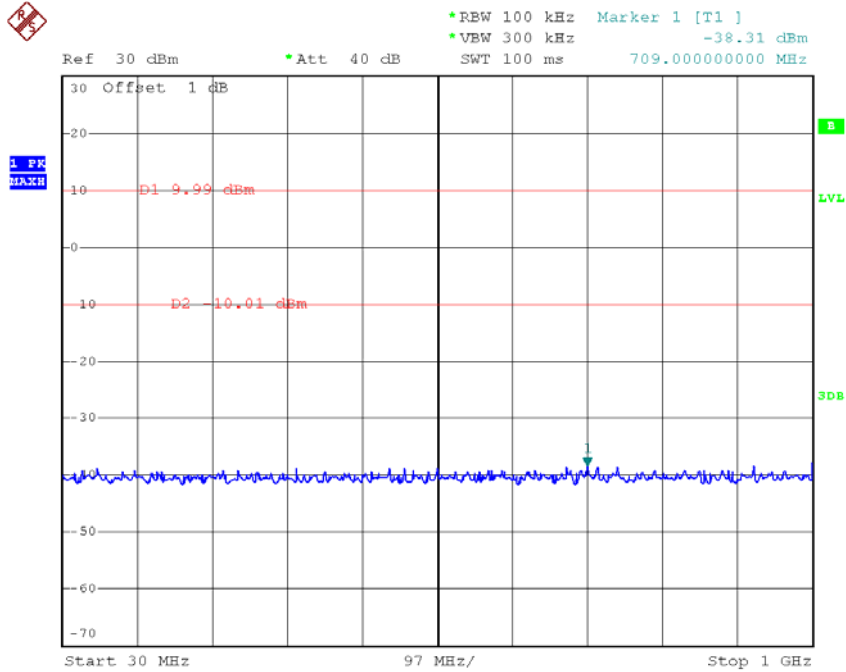


Date: 22.MAY.2014 04:56:36

TX G mode CH01 (1000MHz to 10th Harmonic)

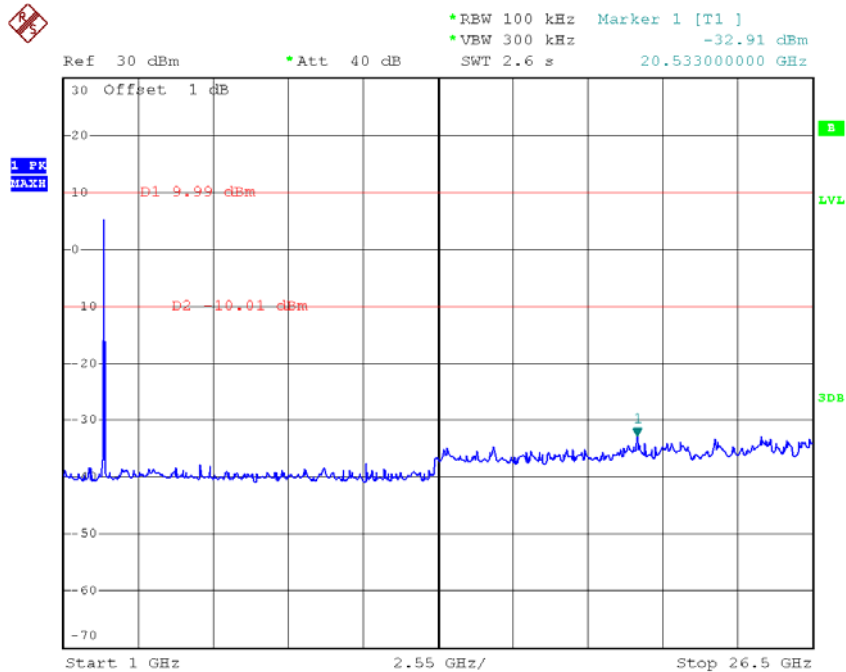


Date: 22.MAY.2014 04:57:00

TX G mode CH06 (30MHz to 1000MHz)

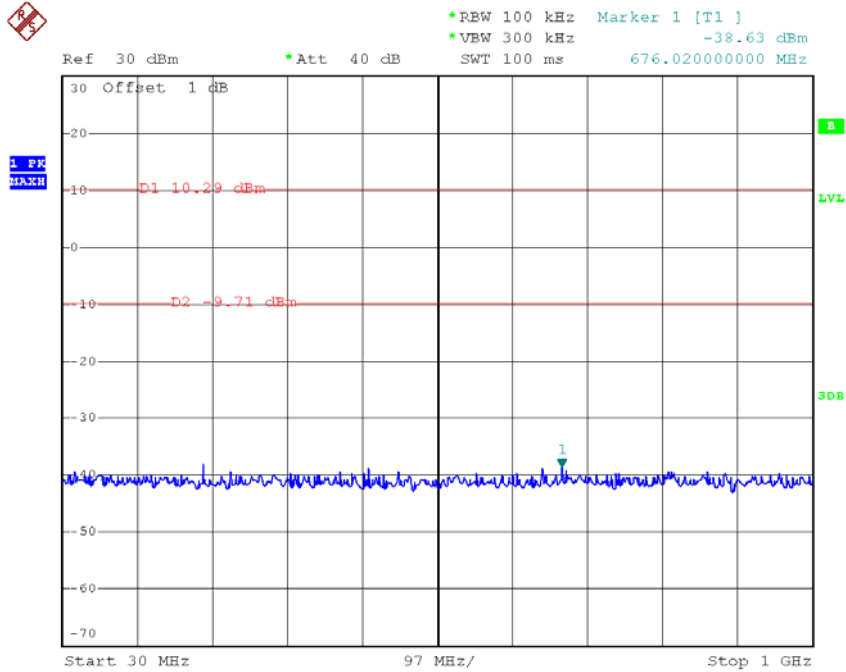


Date: 22.MAY.2014 04:53:14

TX G mode CH06 (1000MHz to 10th Harmonic)

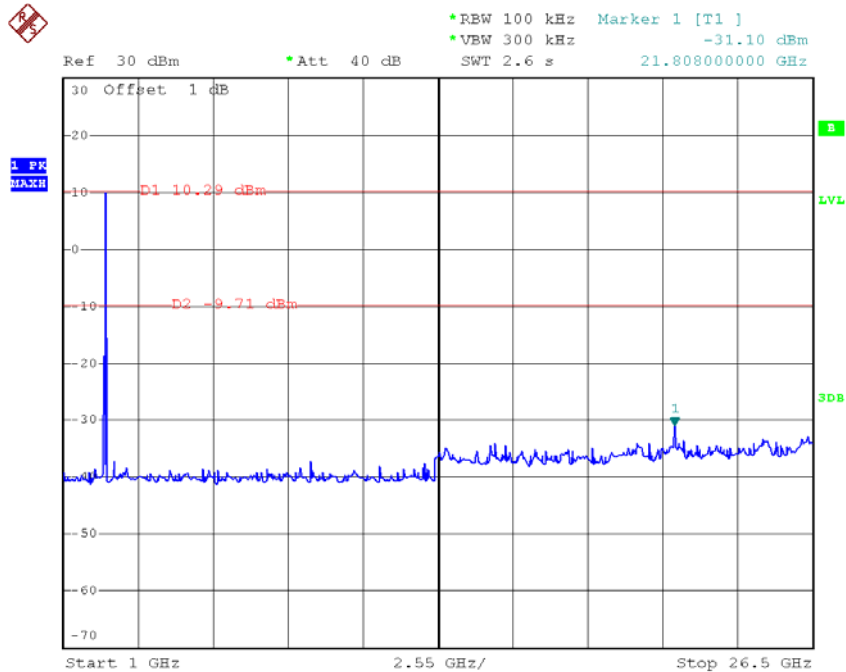


Date: 22.MAY.2014 04:53:34

TX G mode CH11 (30MHz to 1000MHz)

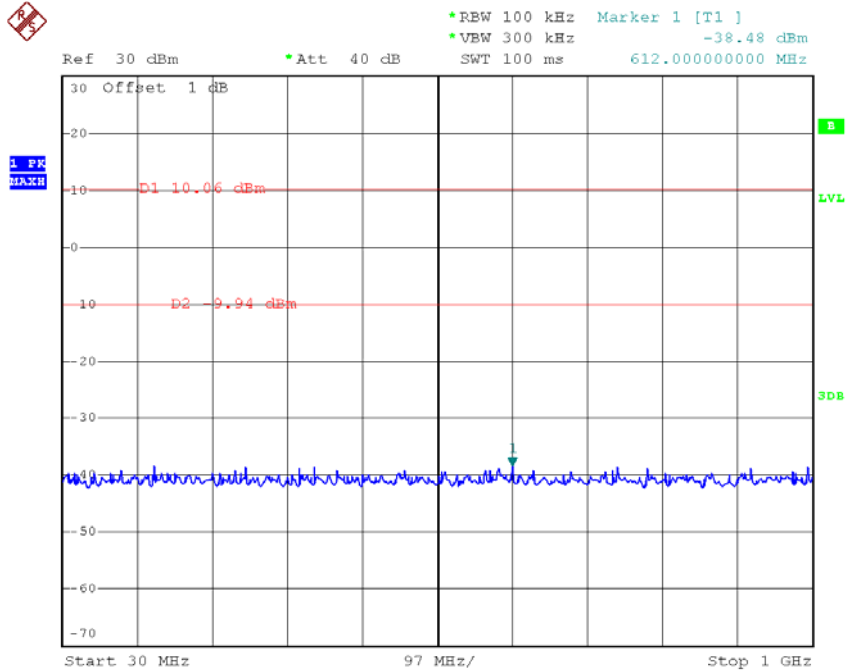

Date: 22.MAY.2014 04:50:13


TX G mode CH11 (1000MHz to 10th Harmonic)

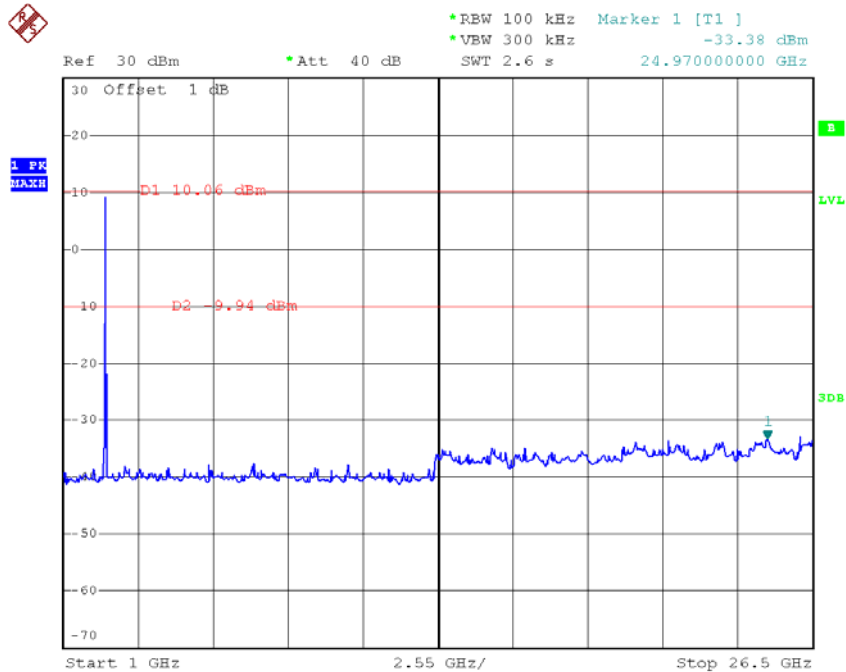

Date: 22.MAY.2014 04:50:41


Test Mode :	TX N-20M Mode_ANT 1
-------------	---------------------

TX HT20 mode CH01

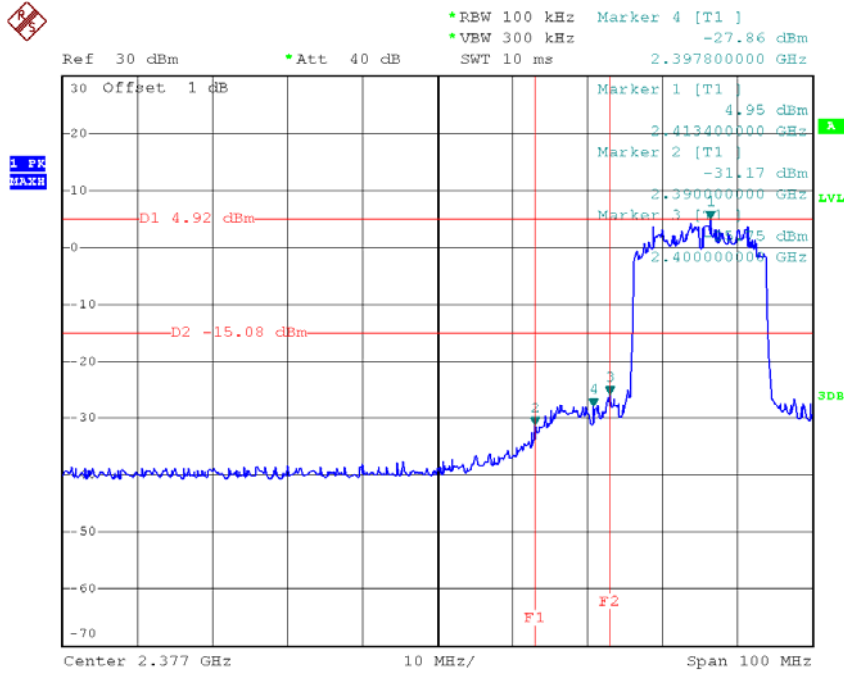


Date: 22.MAY.2014 07:38:34

TX HT20 mode CH11

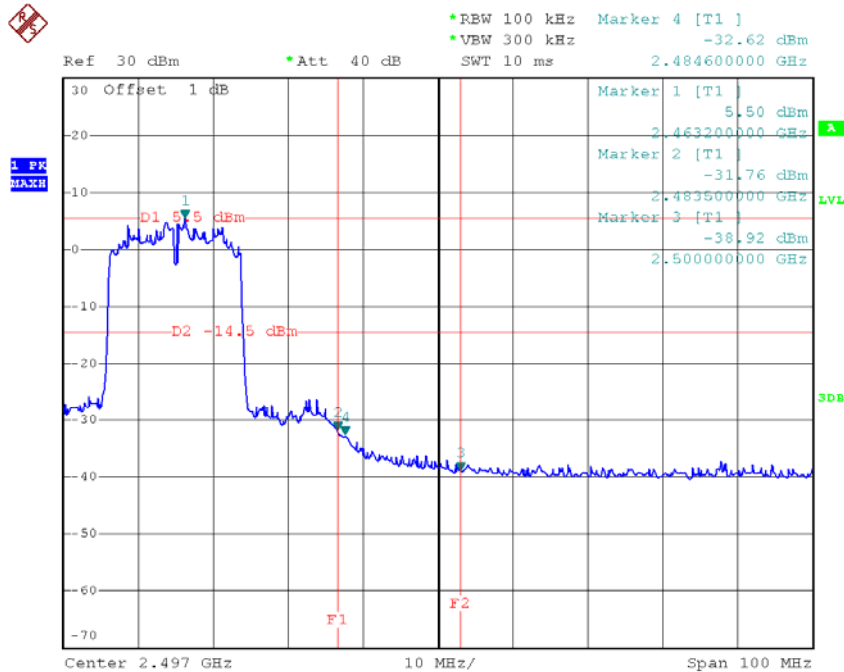


Date: 22.MAY.2014 07:33:23

TX HT20 mode CH01 (30MHz to 1000MHz)

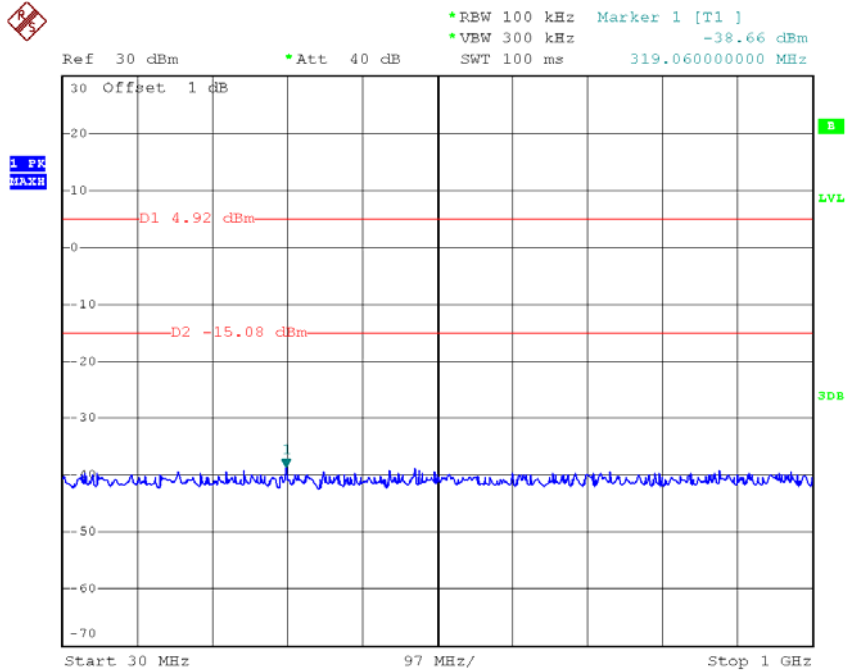


Date: 22.MAY.2014 07:39:05

TX HT20 mode CH01 (1000MHz to 10th Harmonic)

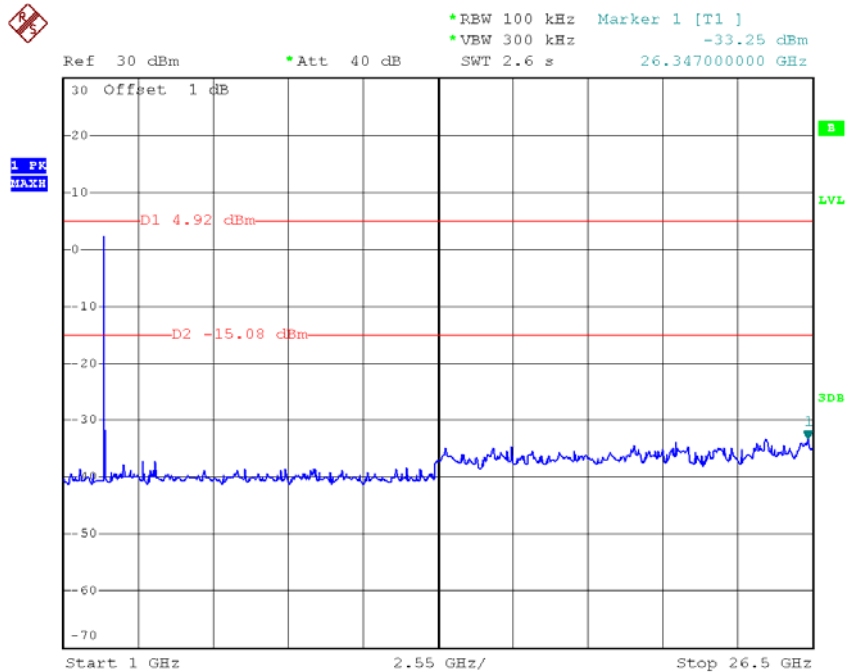


Date: 22.MAY.2014 07:39:21

TX HT20 mode CH06 (30MHz to 1000MHz)

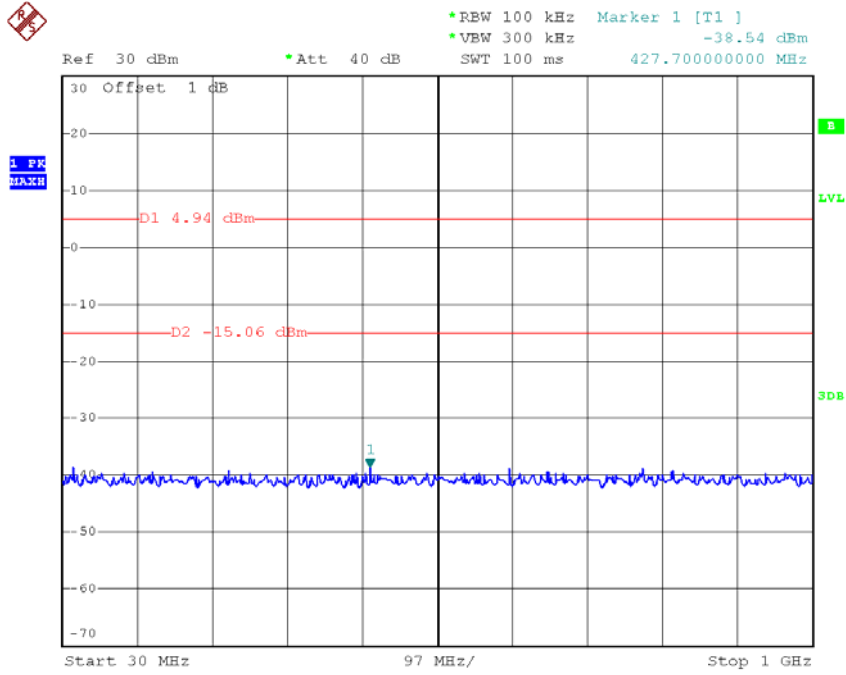


Date: 22.MAY.2014 07:36:25

TX HT20 mode CH06 (1000MHz to 10th Harmonic)

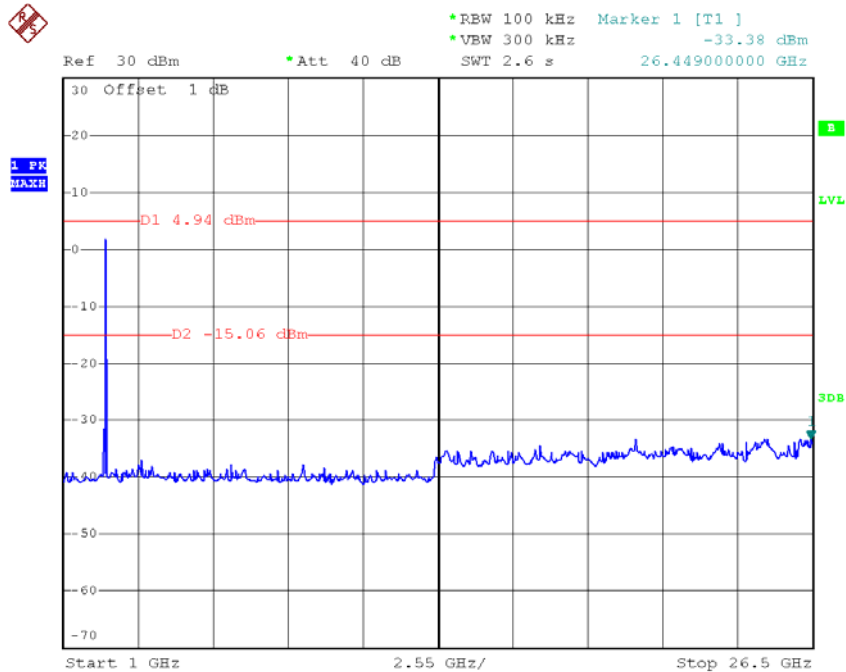


Date: 22.MAY.2014 07:36:48

TX HT20 mode CH11 (30MHz to 1000MHz)

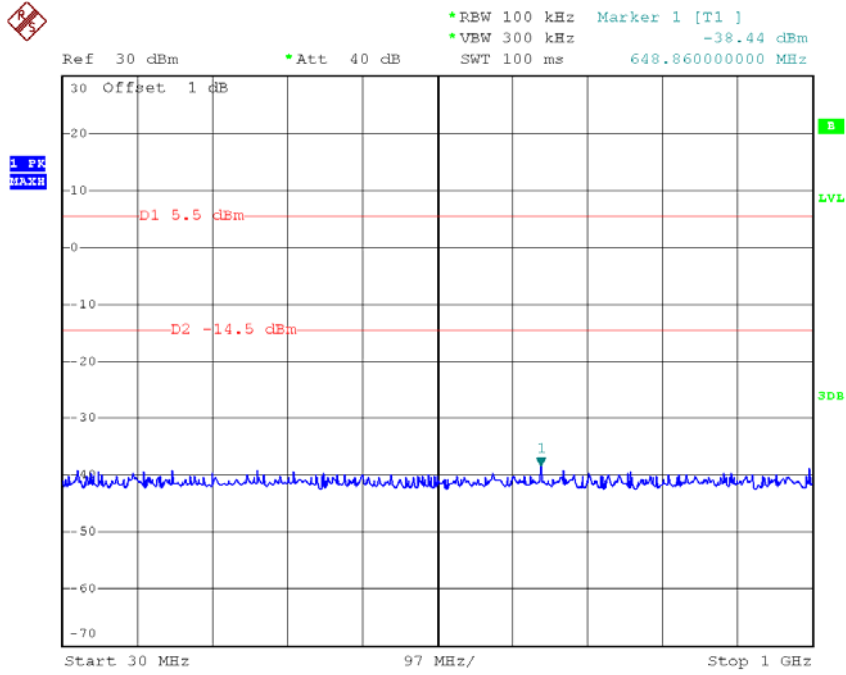

Date: 22.MAY.2014 07:34:05

TX HT20 mode CH11 (1000MHz to 10th Harmonic)

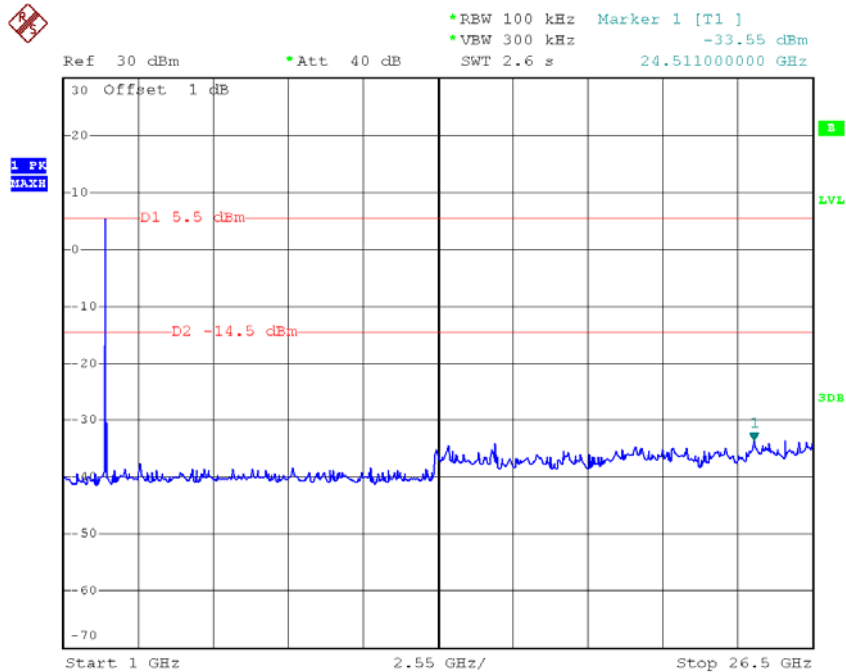


Date: 22.MAY.2014 07:34:20




Test Mode :	TX N-20M Mode_ANT 2
-------------	---------------------

TX HT20 mode CH01

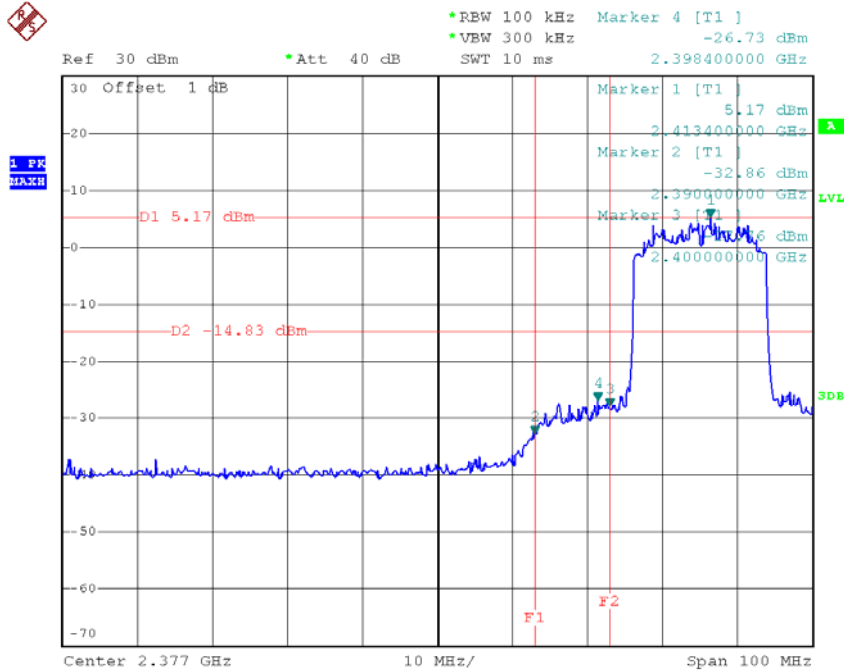


Date: 27.MAY.2014 10:19:32

TX HT20 mode CH11

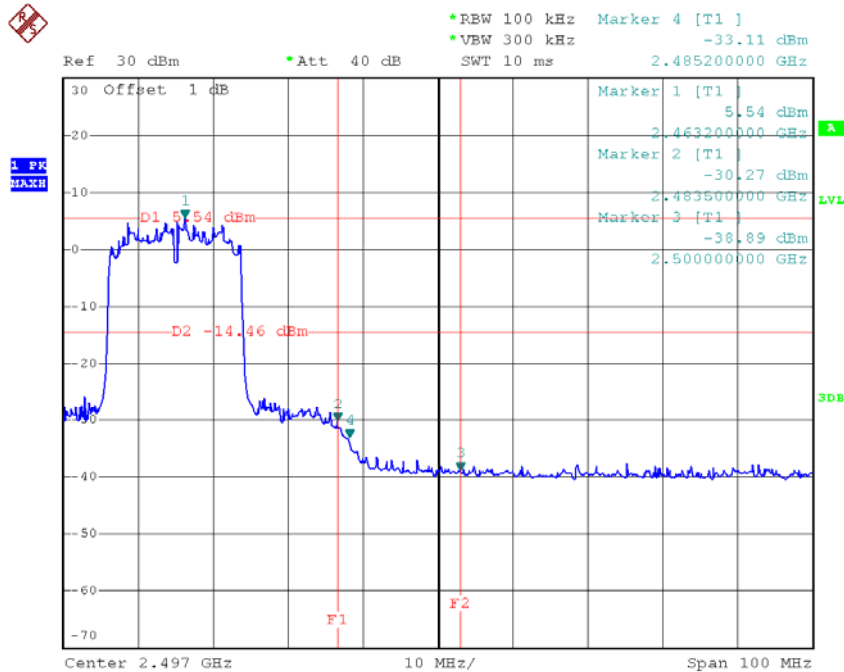


Date: 27.MAY.2014 10:12:59

TX HT20 mode CH01 (30MHz to 1000MHz)

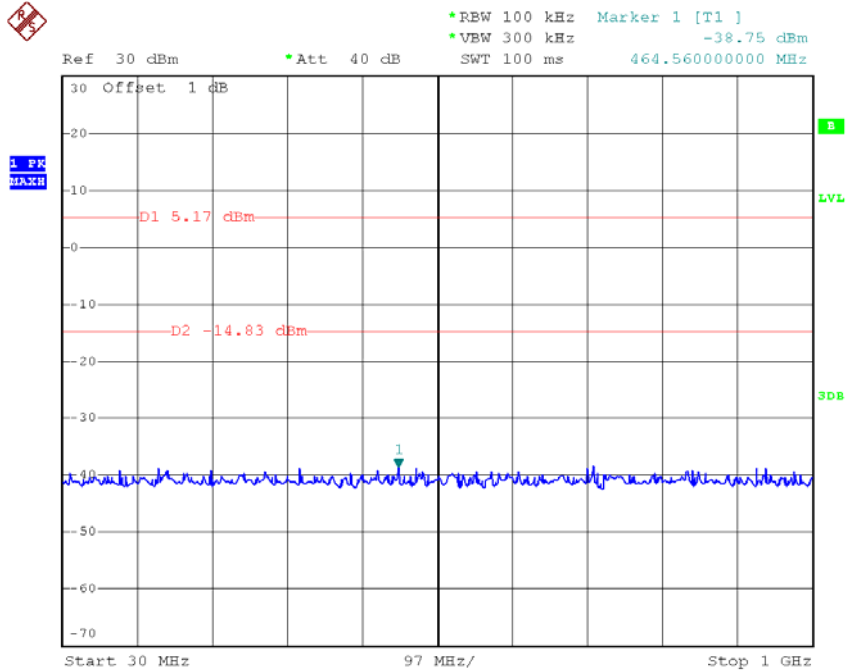


Date: 27.MAY.2014 10:20:10

TX HT20 mode CH01 (1000MHz to 10th Harmonic)

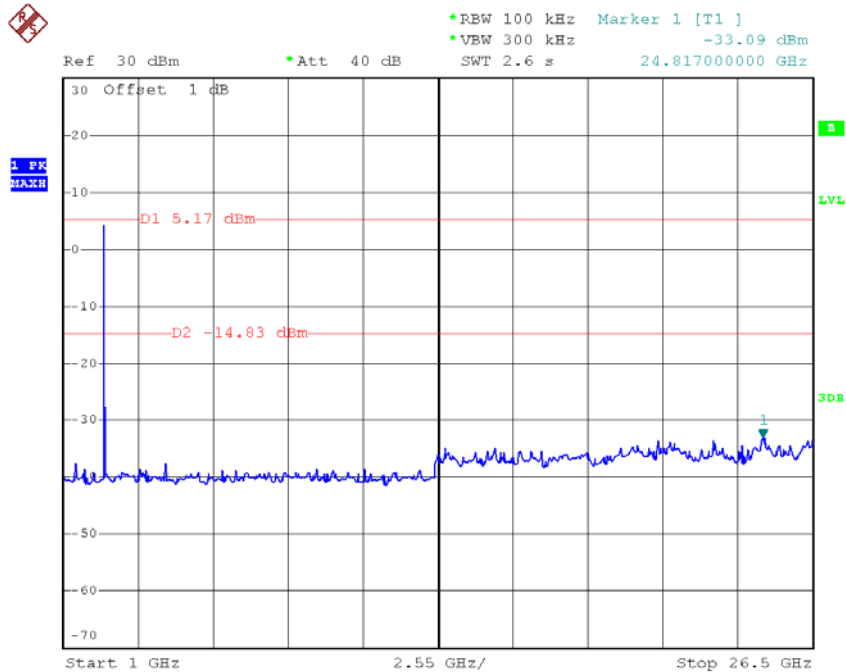


Date: 27.MAY.2014 10:20:31

TX HT20 mode CH06 (30MHz to 1000MHz)

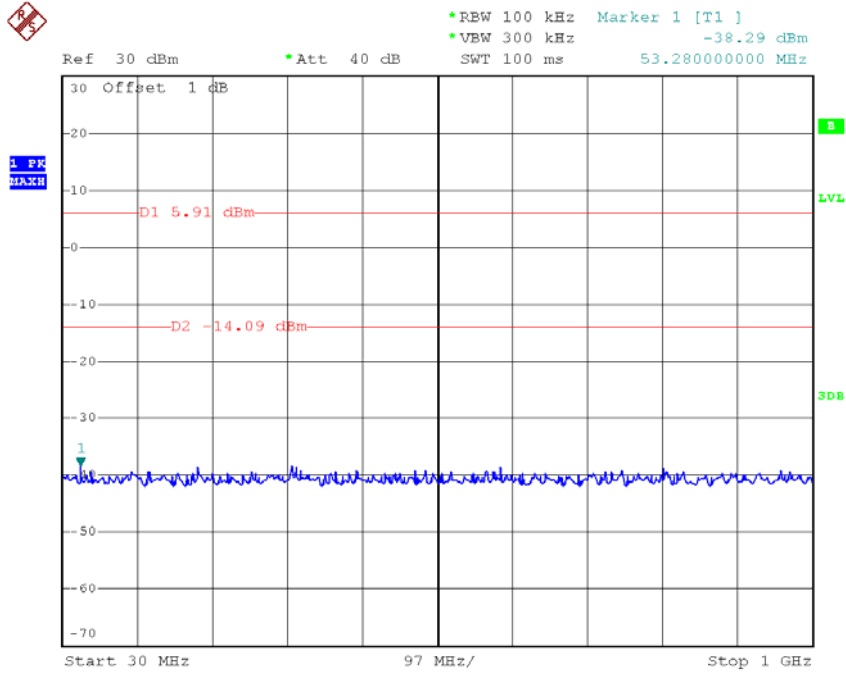


Date: 27.MAY.2014 10:17:07

TX HT20 mode CH06 (1000MHz to 10th Harmonic)

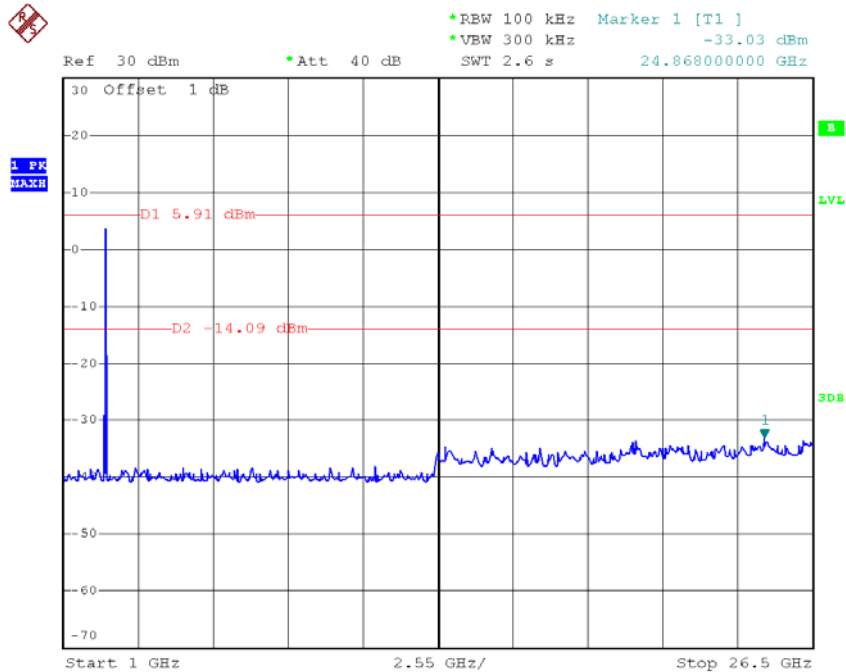


Date: 27.MAY.2014 10:17:24

TX HT20 mode CH11 (30MHz to 1000MHz)

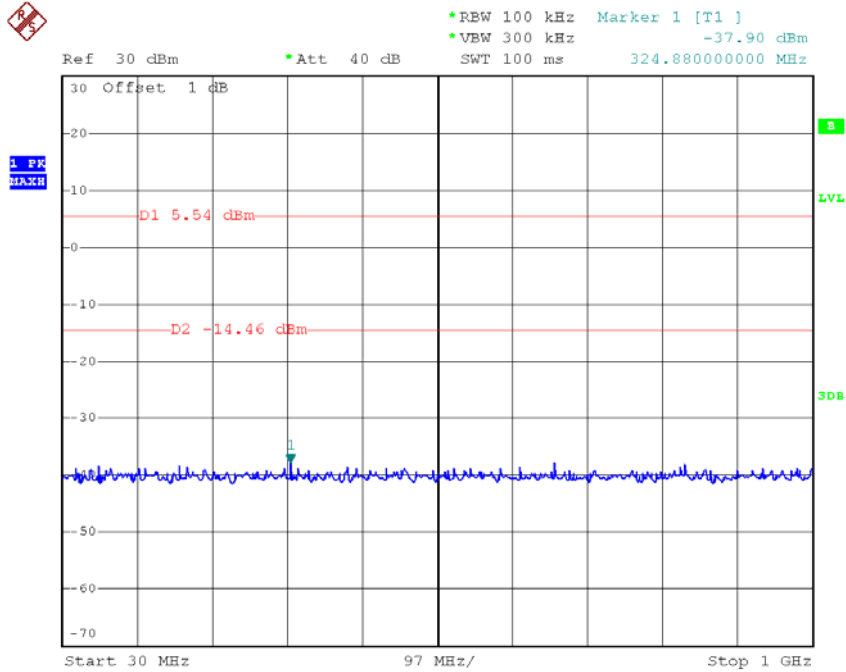

Date: 27.MAY.2014 10:14:41


TX HT20 mode CH11 (1000MHz to 10th Harmonic)

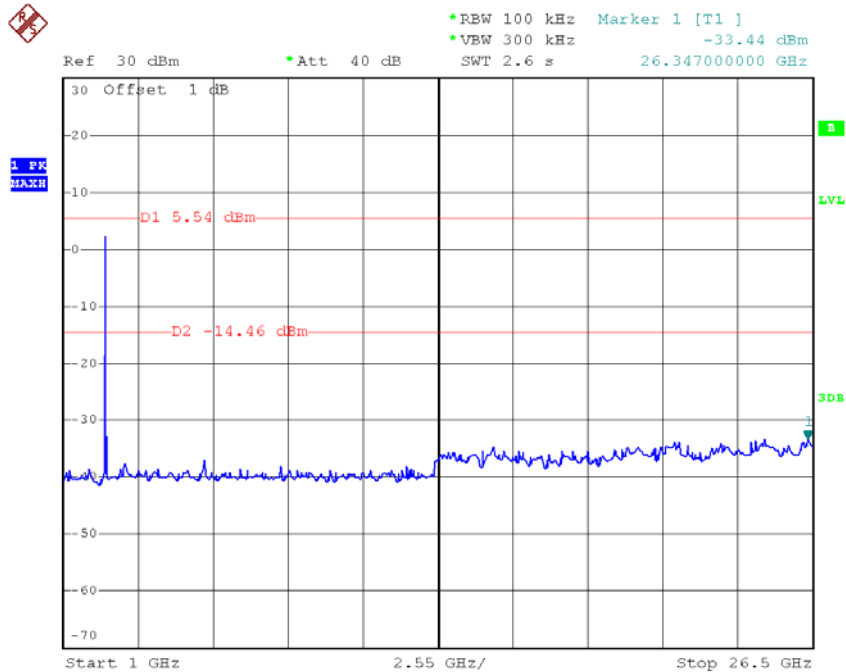

Date: 27.MAY.2014 10:15:16


Test Mode :	TX N-40M Mode_ANT 1
-------------	---------------------

TX HT40 mode CH03

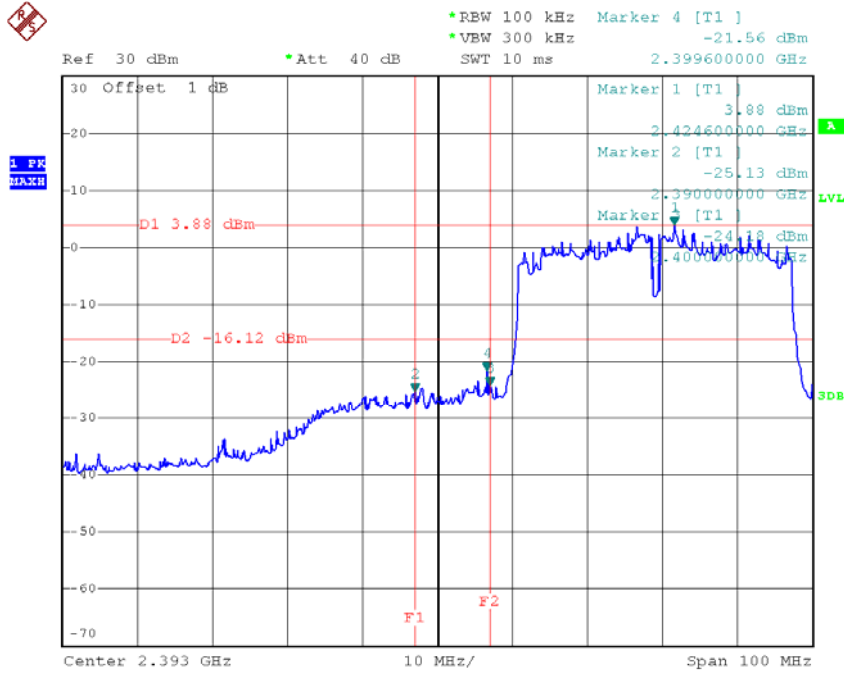


Date: 27.MAY.2014 11:06:14

TX HT40 mode CH09

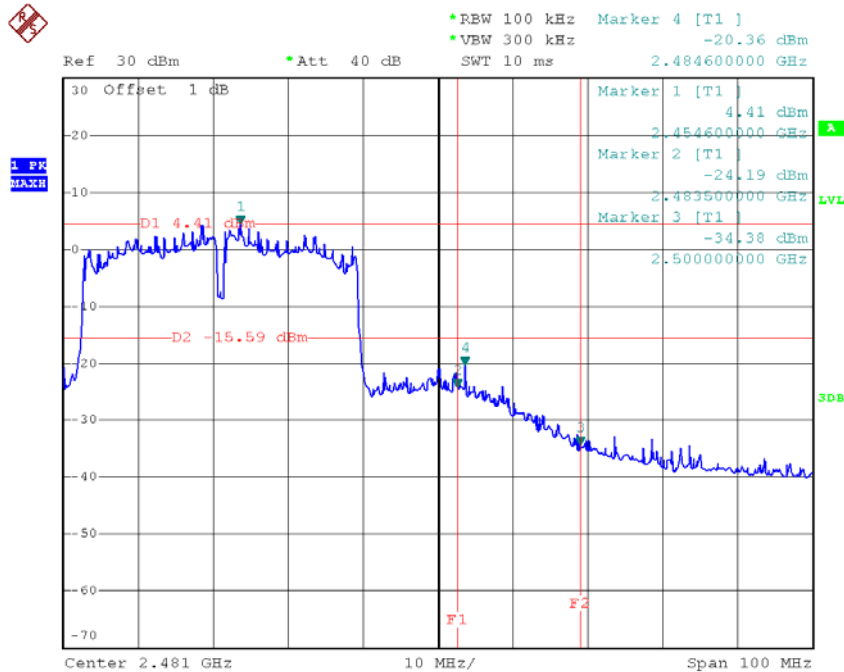


Date: 27.MAY.2014 10:58:54

TX HT40 mode CH03 (30MHz to 1000MHz)

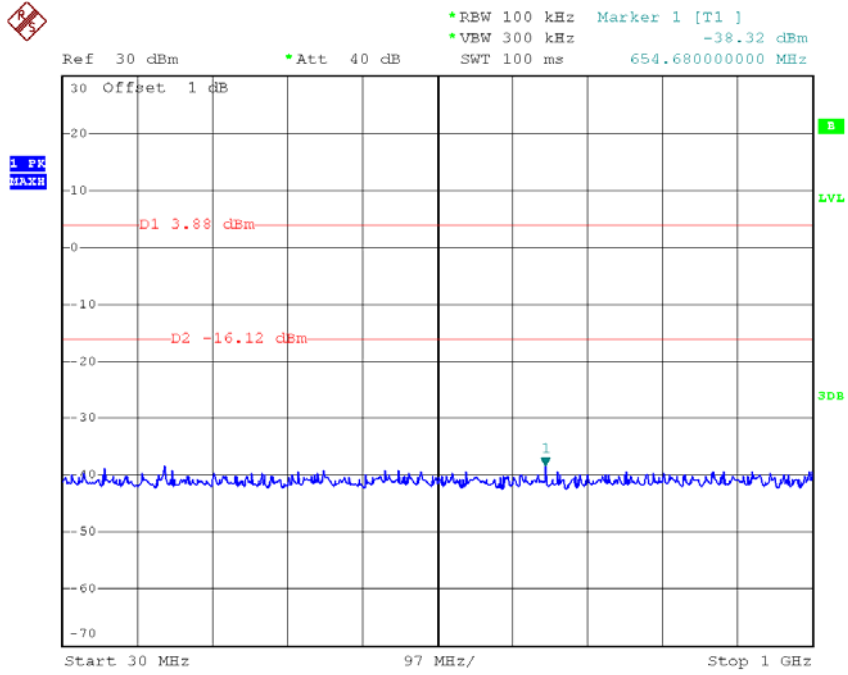


Date: 27.MAY.2014 11:06:42

TX HT40 mode CH03 (1000MHz to 10th Harmonic)

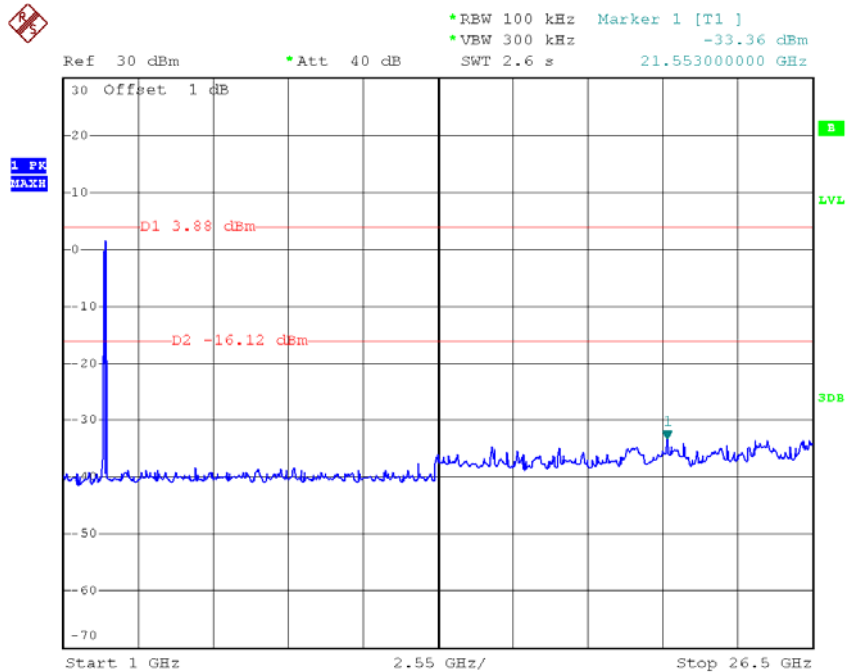


Date: 27.MAY.2014 11:06:57

TX HT40 mode CH06 (30MHz to 1000MHz)

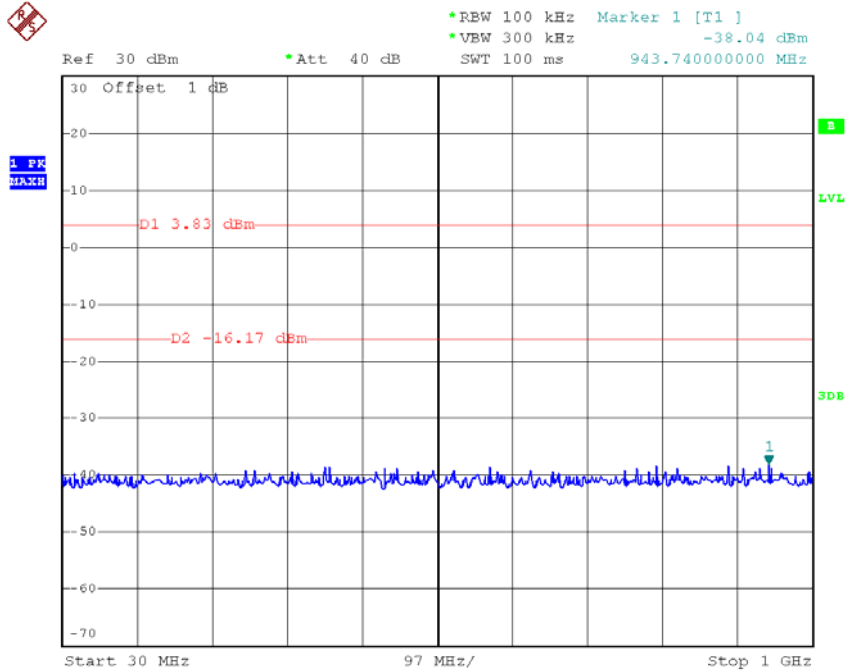


Date: 27.MAY.2014 11:02:29

TX HT40 mode CH06 (1000MHz to 10th Harmonic)

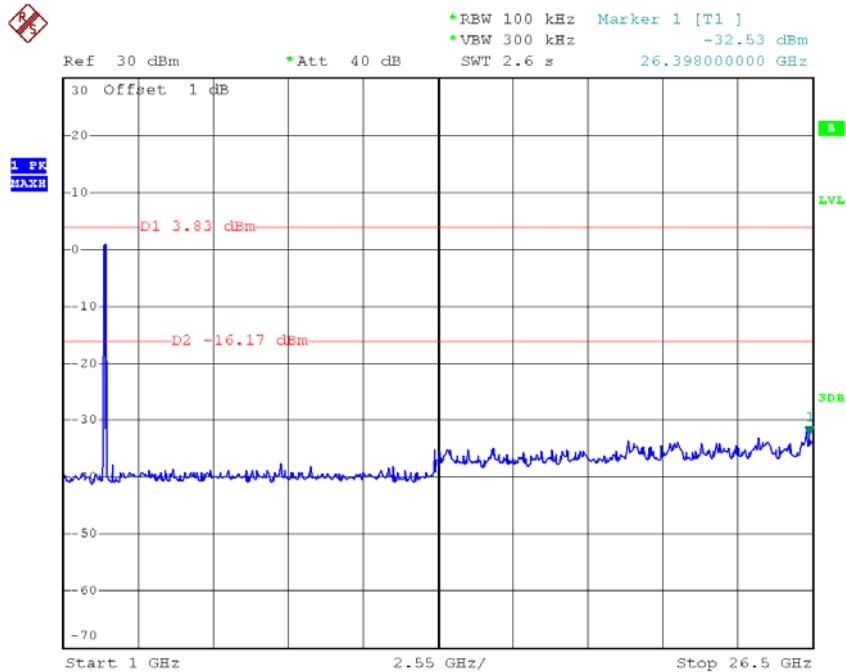


Date: 27.MAY.2014 11:02:47

TX HT40 mode CH09 (30MHz to 1000MHz)

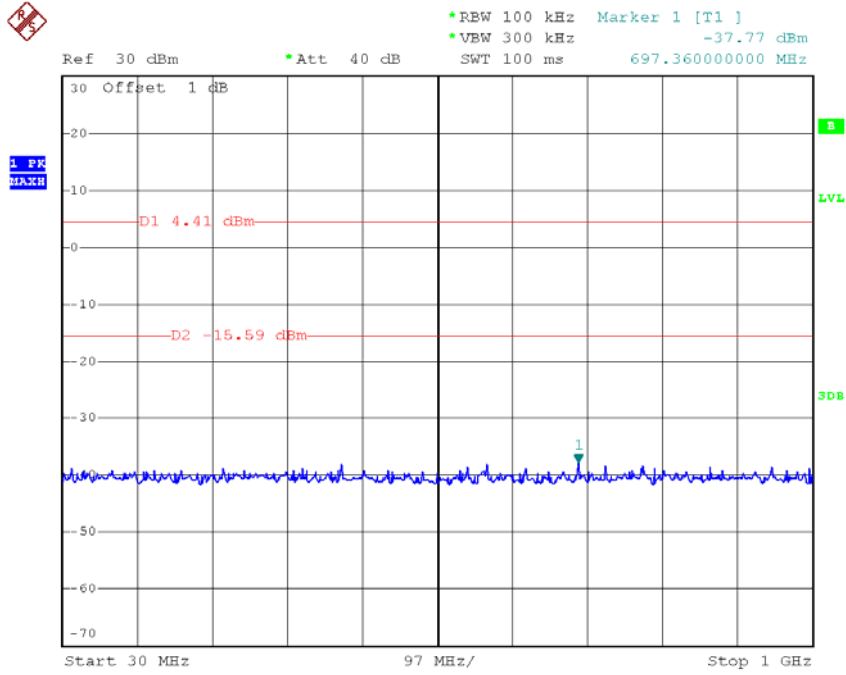

Date: 27.MAY.2014 10:59:42


TX HT40 mode CH09 (1000MHz to 10th Harmonic)

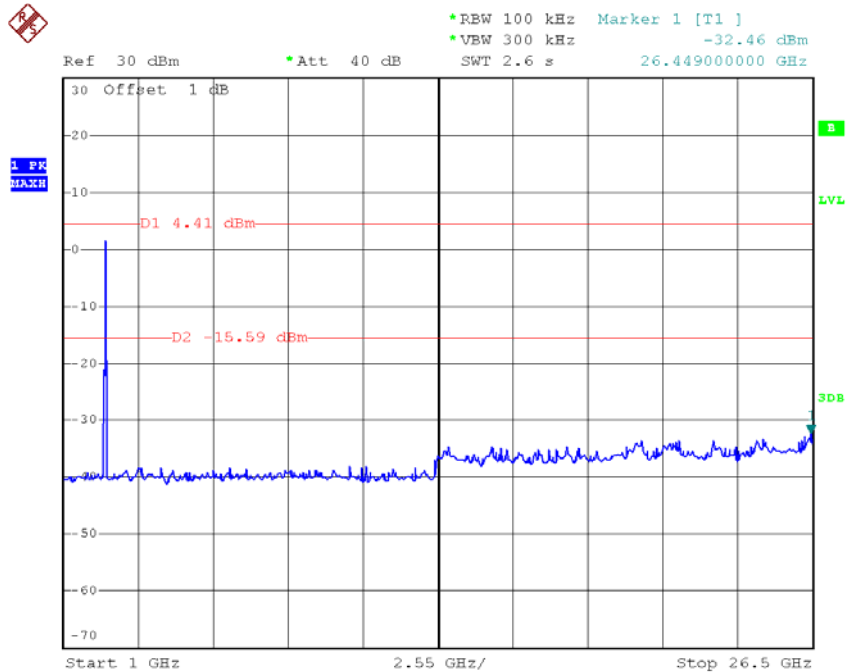

Date: 27.MAY.2014 11:00:03


Test Mode :	TX N-40M Mode_ANT 2
-------------	---------------------

TX HT40 mode CH03

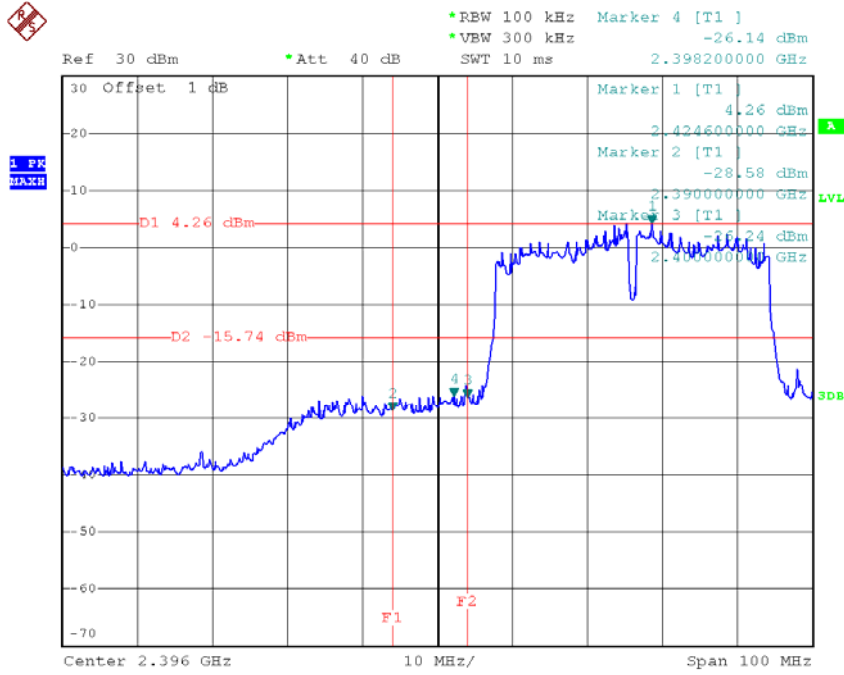


Date: 27.MAY.2014 10:42:48

TX HT40 mode CH09

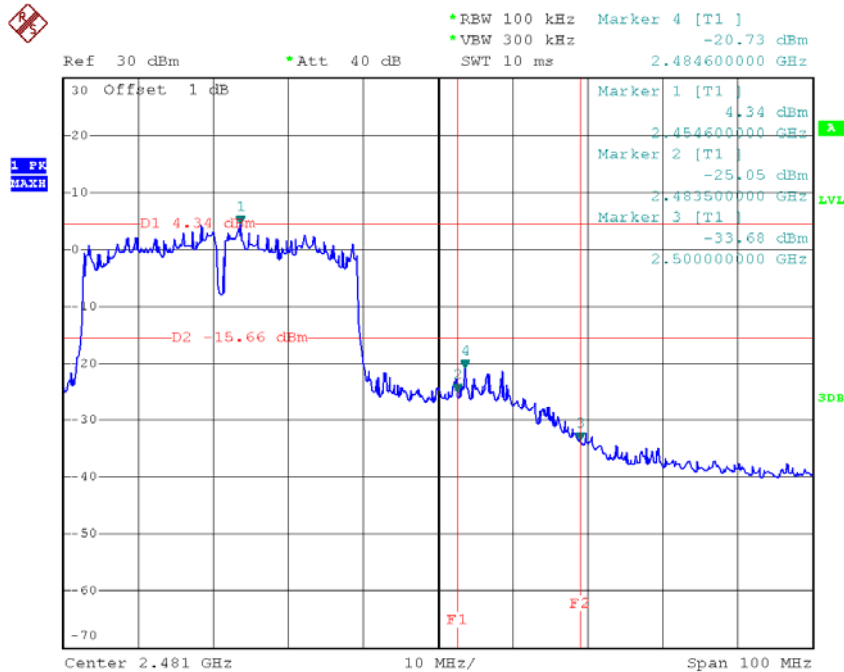


Date: 27.MAY.2014 10:36:19

TX HT40 mode CH03 (30MHz to 1000MHz)

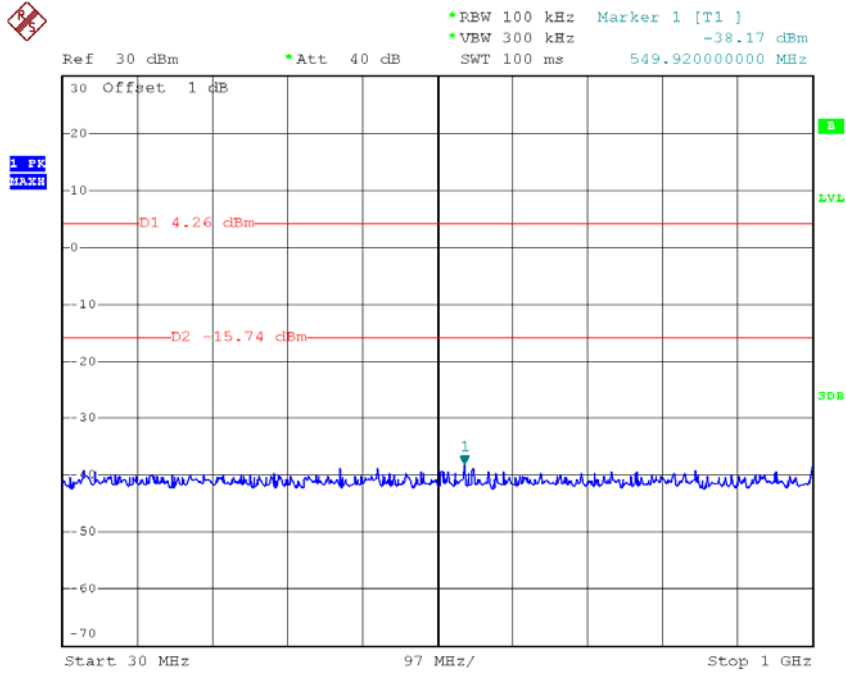


Date: 27.MAY.2014 10:43:27

TX HT40 mode CH03 (1000MHz to 10th Harmonic)

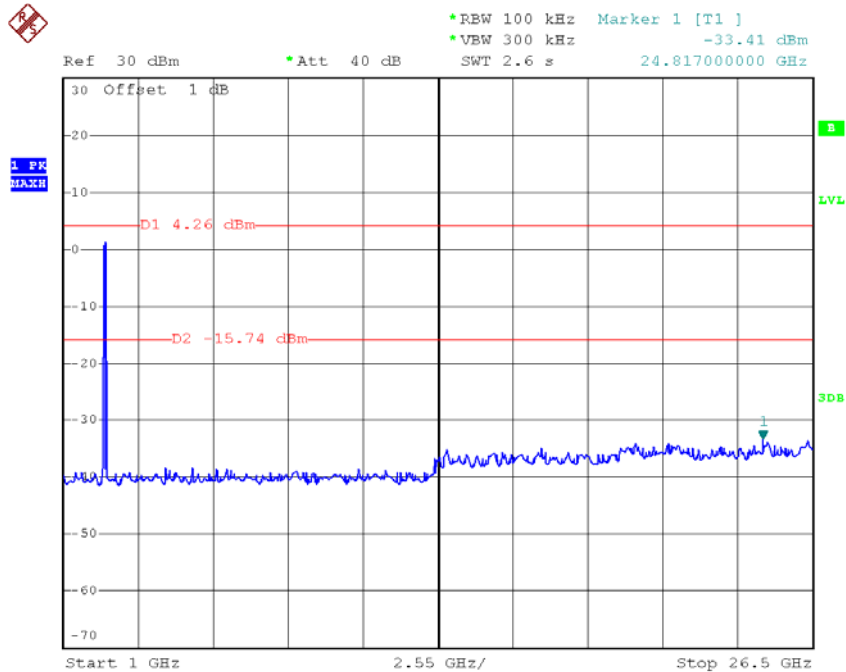


Date: 27.MAY.2014 10:43:46

TX HT40 mode CH09 (30MHz to 1000MHz)

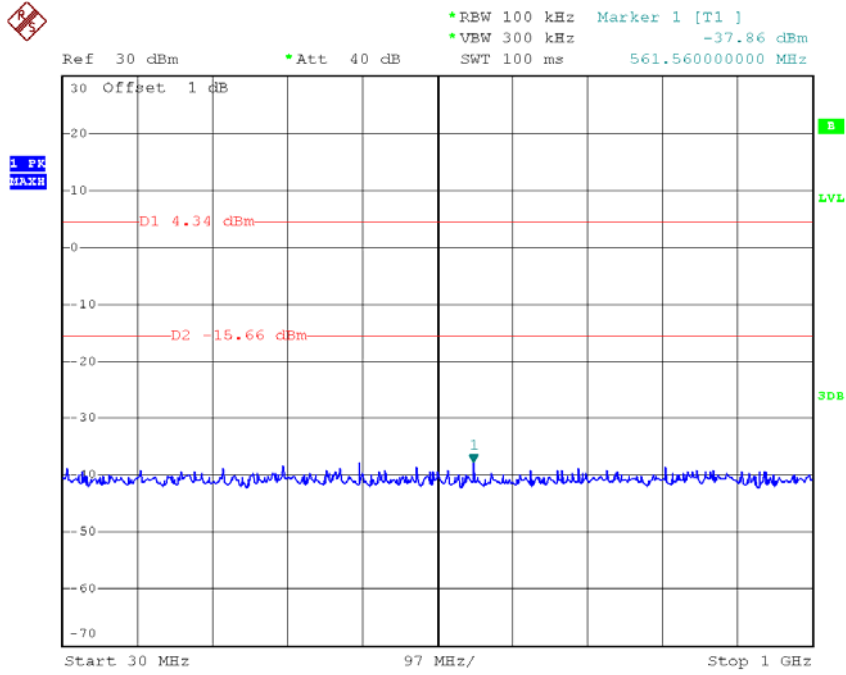

Date: 27.MAY.2014 10:37:15

TX HT40 mode CH09 (1000MHz to 10th Harmonic)

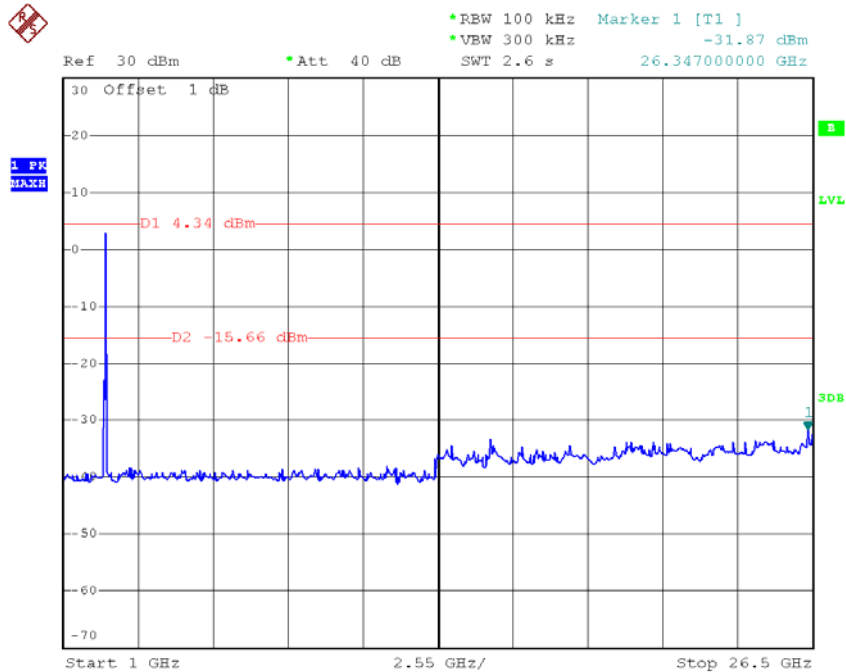


Date: 27.MAY.2014 10:37:41

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode :TX B Mode_CH01/06/11

TX CH01

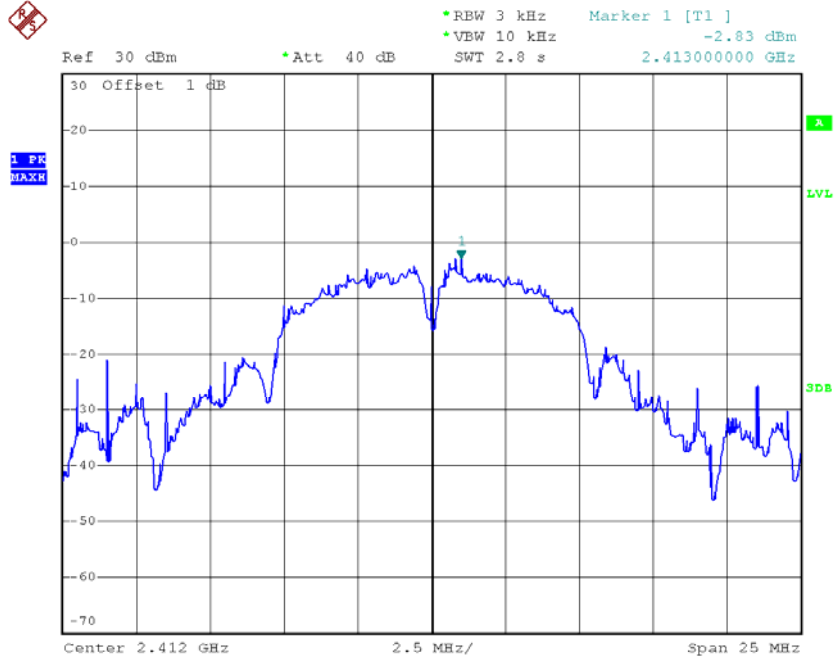


Date: 11.JUN.2014 14:31:04

TX CH06

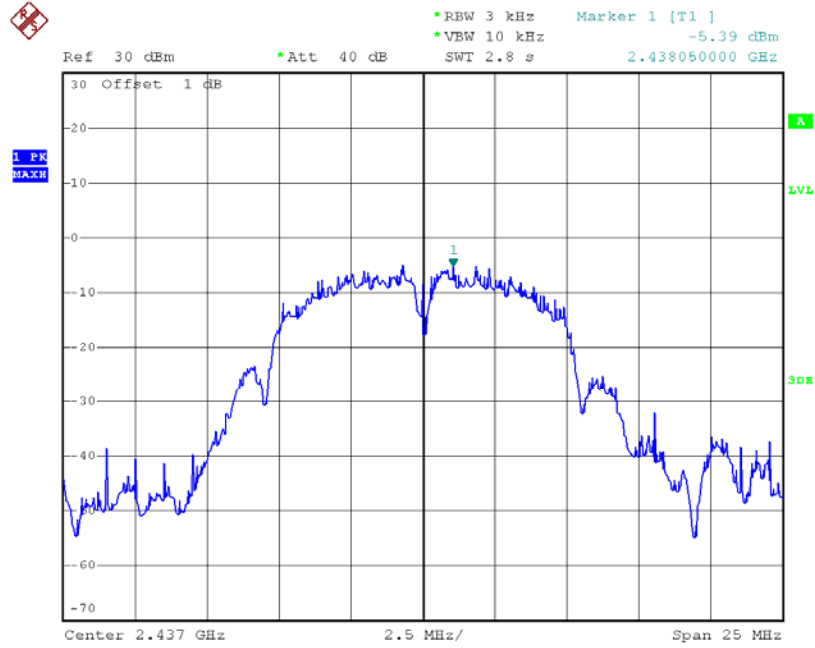

Date: 11.JUN.2014 14:34:25


TX CH11

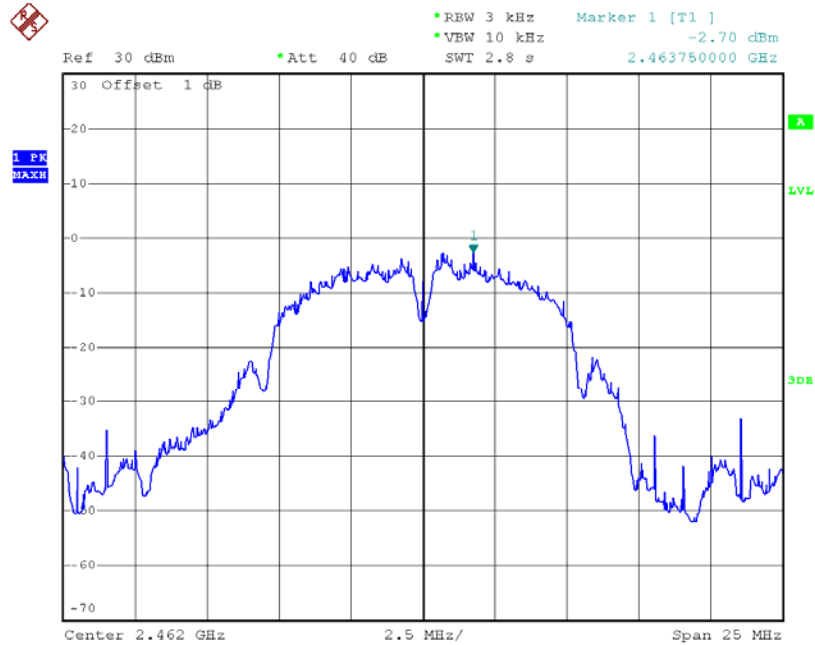

Date: 11.JUN.2014 14:36:52


Test Mode :TX G Mode_CH01/06/11

TX CH01

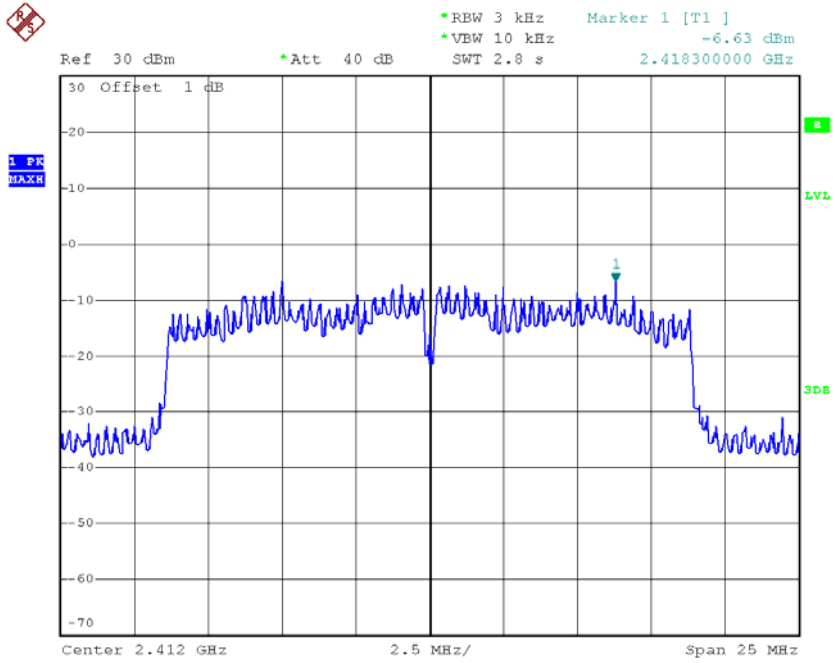


Date: 22.MAY.2014 04:36:19

TX CH06

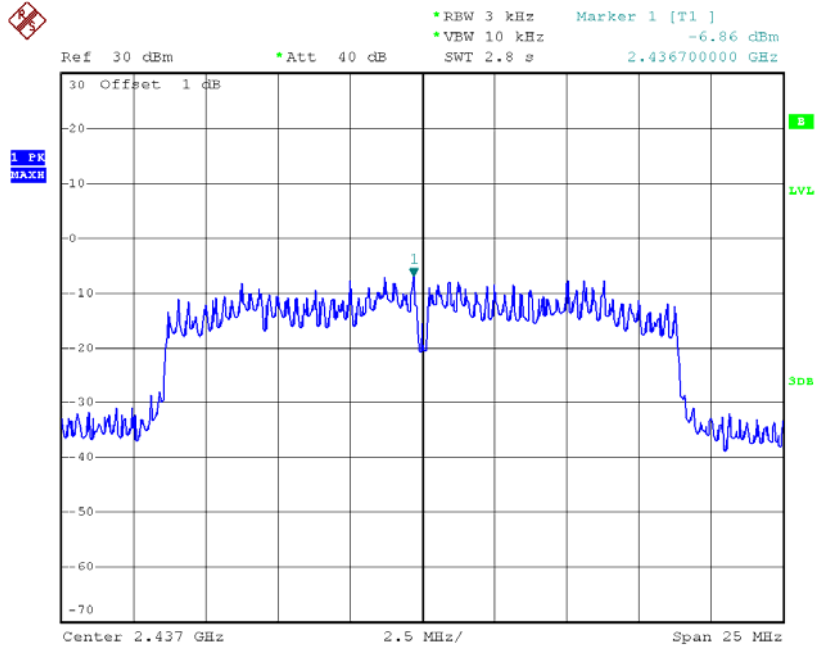

Date: 22.MAY.2014 04:39:26


TX CH11

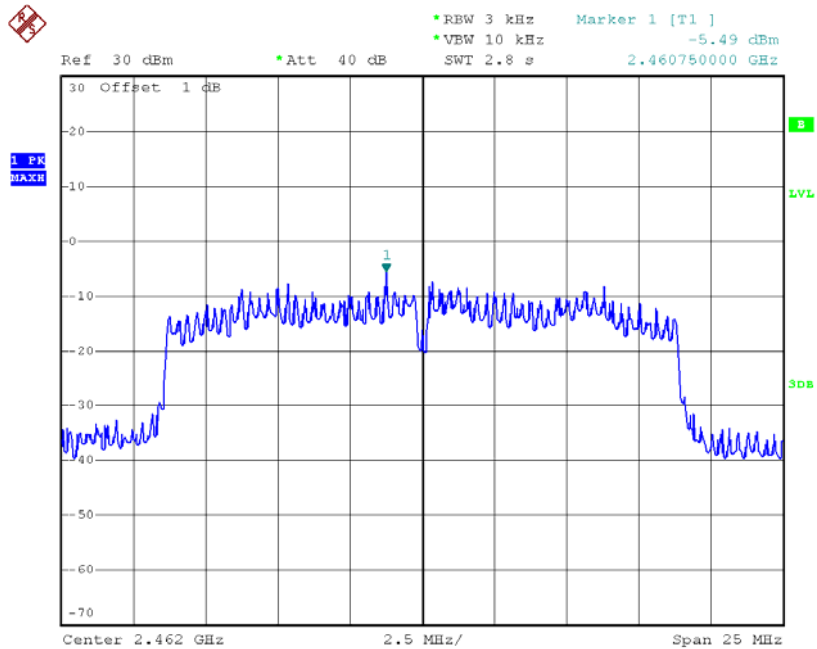

Date: 22.MAY.2014 04:45:11


Test Mode : TX N-20M Mode_CH01/06/11_ANT 1

TX CH01

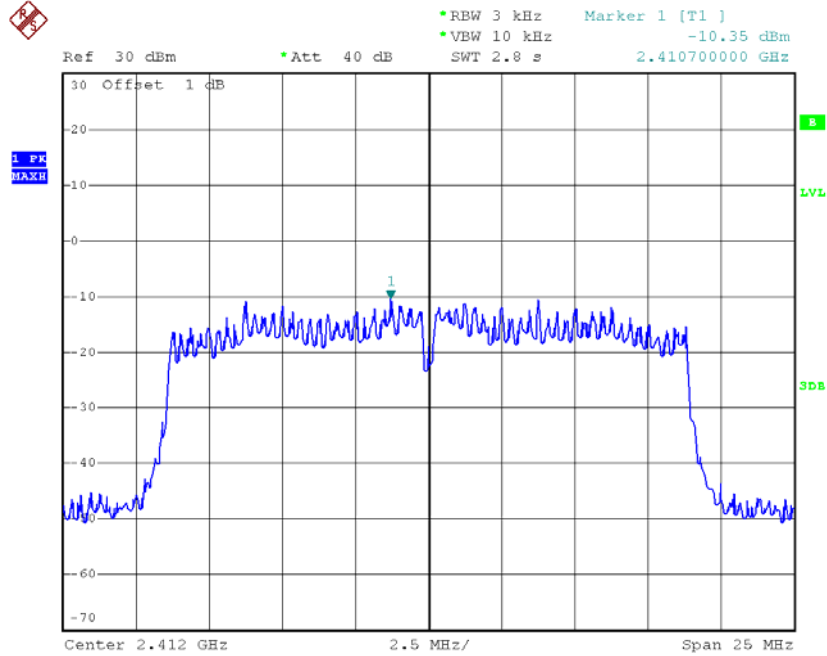


Date: 22.MAY.2014 07:22:02

TX CH06

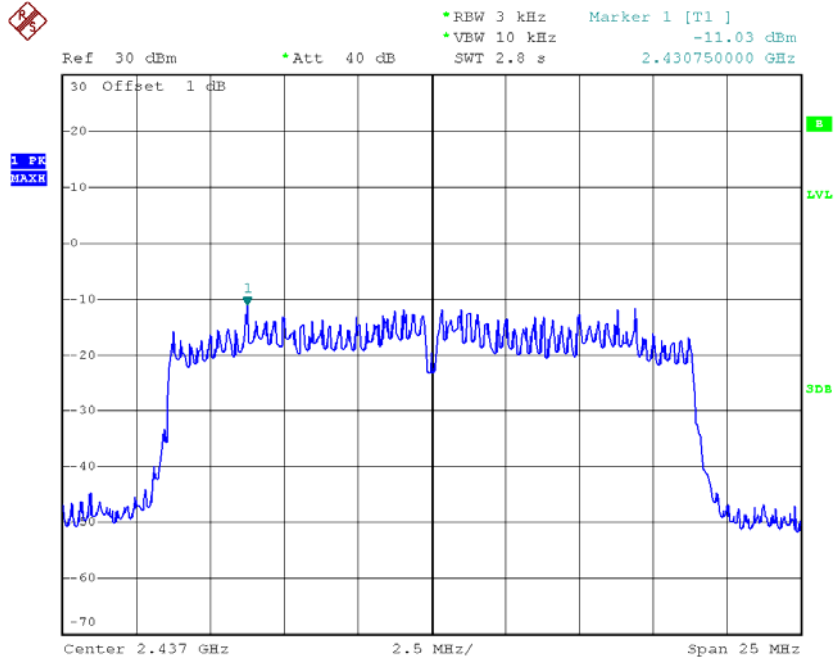

Date: 22.MAY.2014 07:24:33


TX CH11

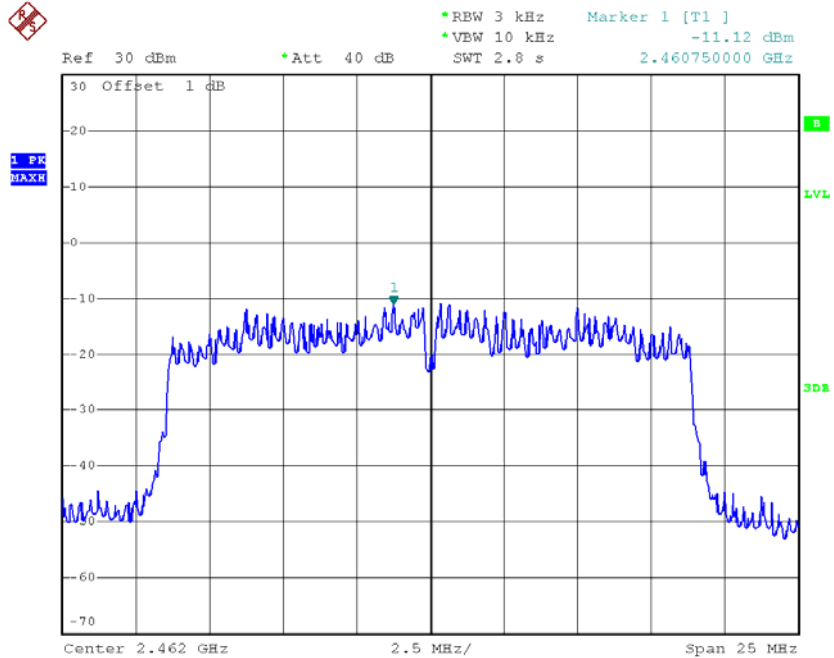

Date: 22.MAY.2014 07:29:15


Test Mode : TX N-20M Mode_CH01/06/11_ANT 2

TX CH01

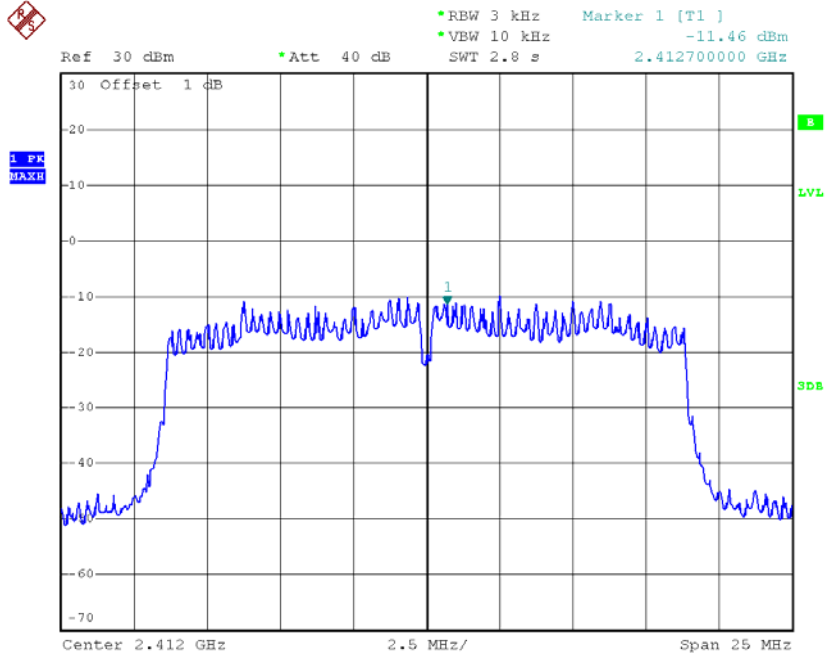


Date: 27.MAY.2014 09:32:37

TX CH06

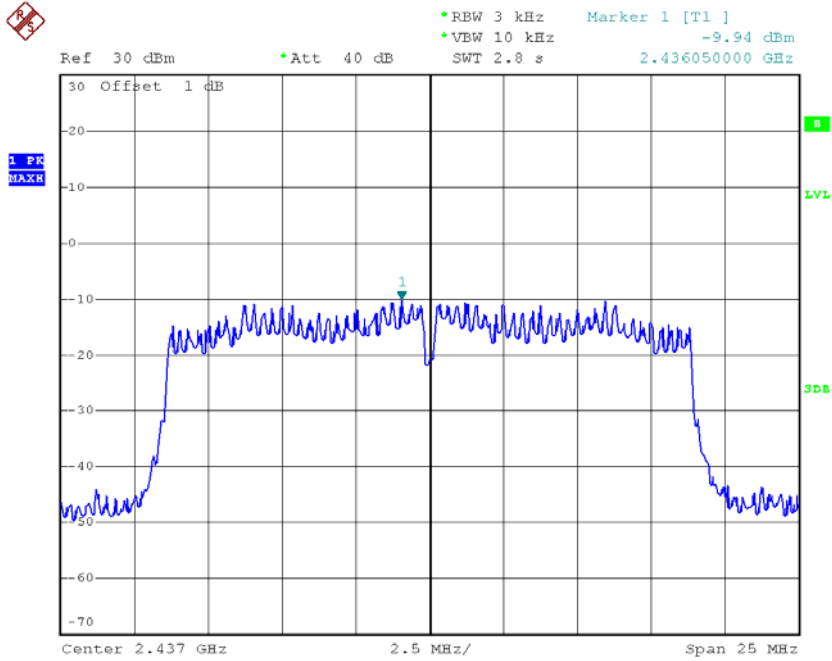

Date: 27.MAY.2014 09:38:36

TX CH11

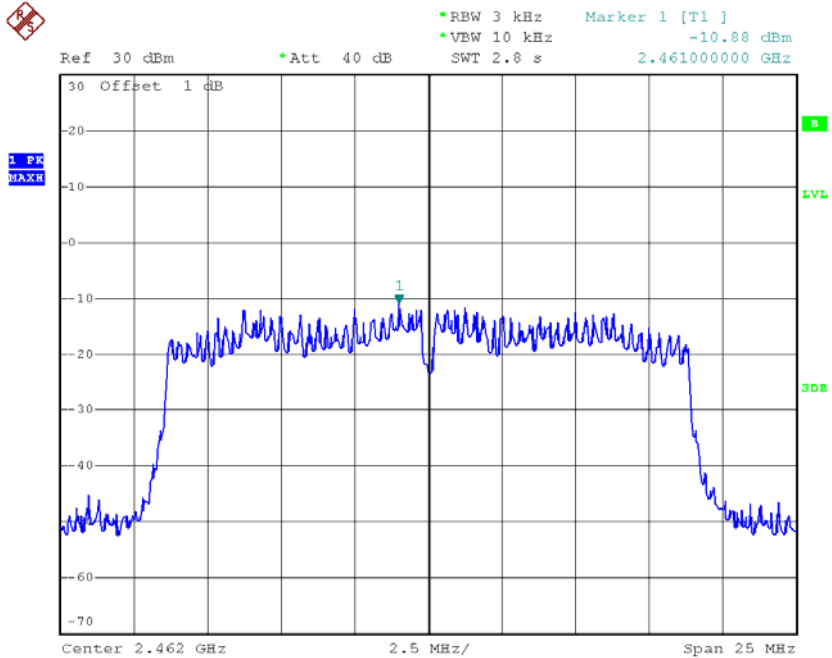


Date: 27.MAY.2014 09:42:17

Test Mode : TX N-20M Mode_CH01/06/11_Total			
Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH01	2412	-7.86	8
CH06	2437	-7.44	8
CH11	2462	-7.99	8


Test Mode : TX N-40M Mode_CH03/06/09_ANT 1

TX CH03

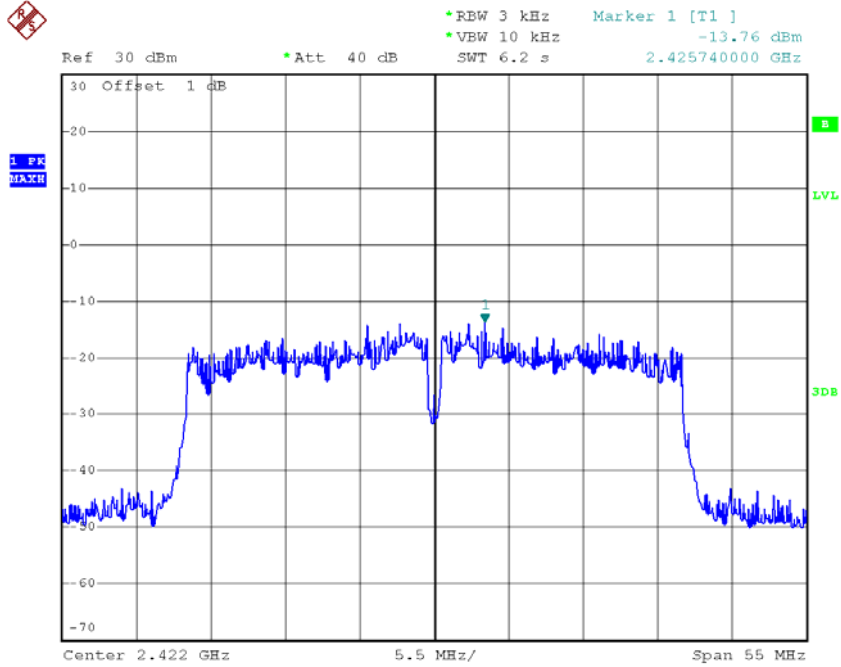


Date: 27.MAY.2014 10:48:52

TX CH06

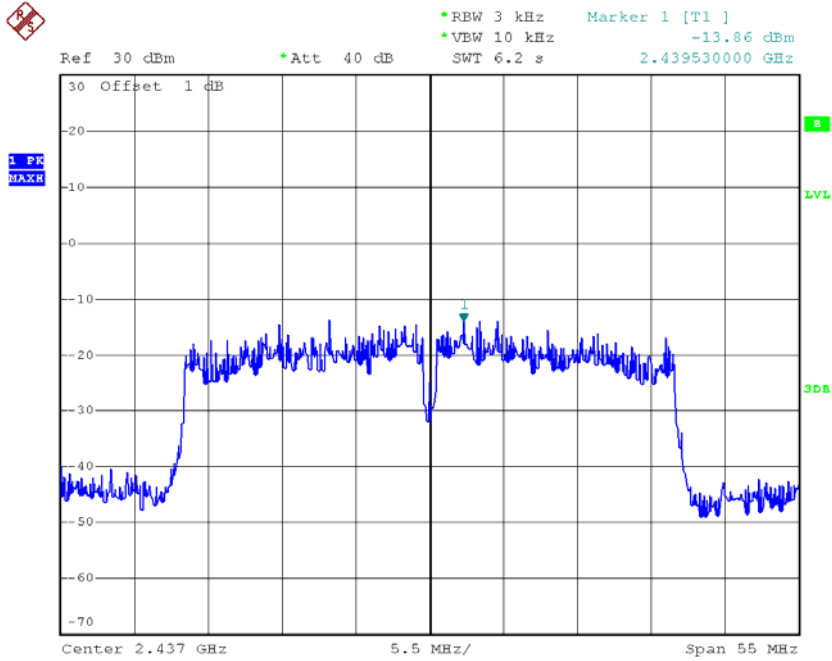

Date: 27.MAY.2014 10:52:55


TX CH09

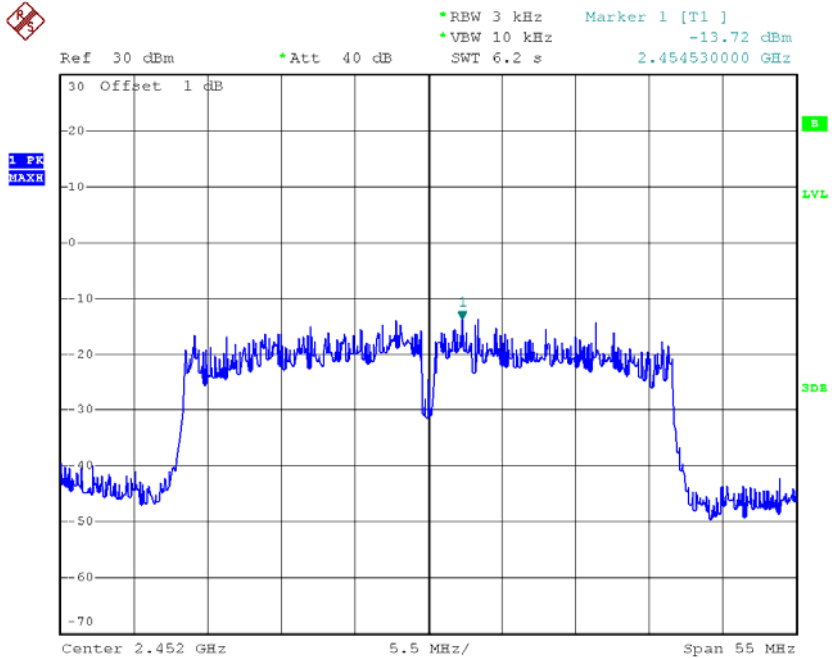

Date: 27.MAY.2014 10:54:57


Test Mode : TX N-40M Mode_CH03/06/09_ANT 2

TX CH03

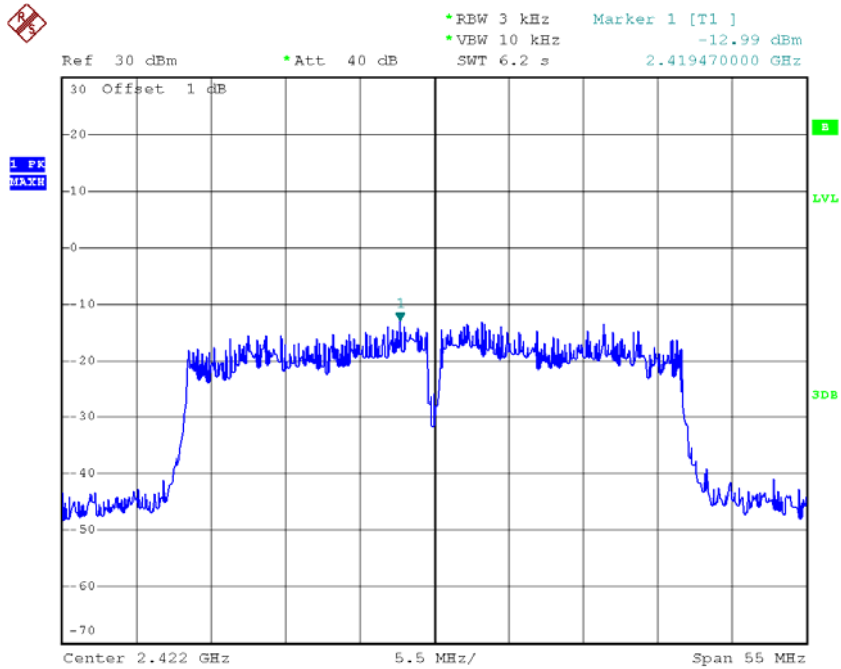


Date: 27.MAY.2014 10:23:21

TX CH06

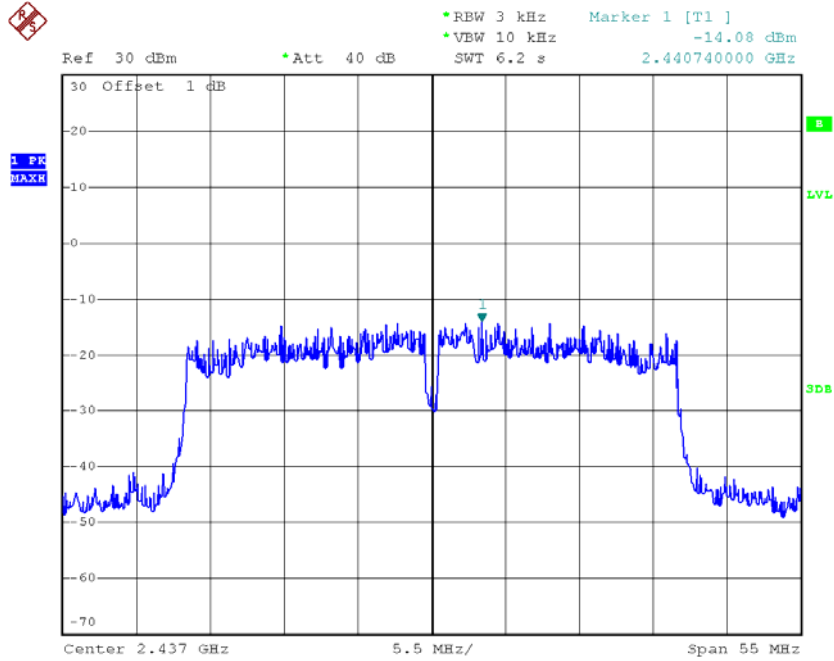

Date: 27.MAY.2014 10:28:03

TX CH09

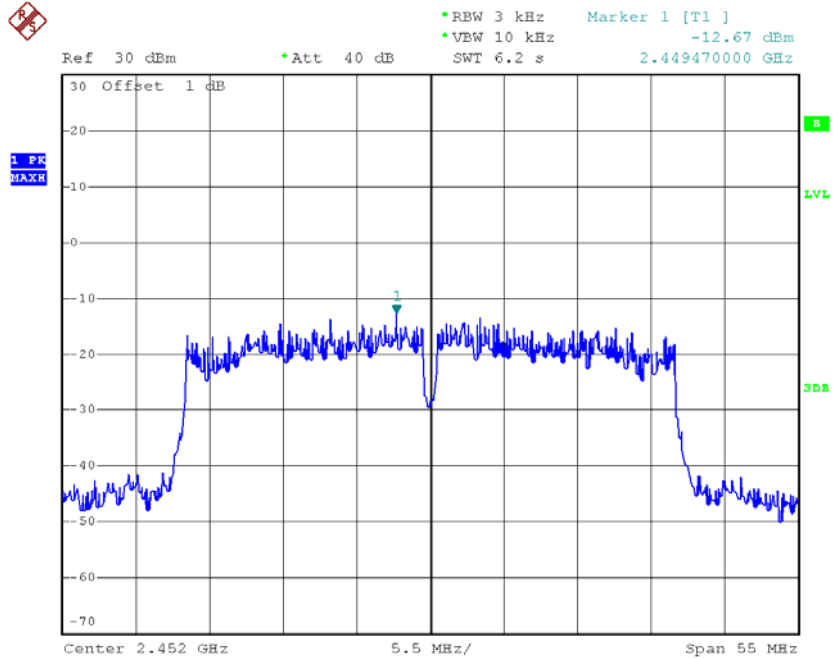

Date: 27.MAY.2014 10:31:07

Test Mode : TX N-40M Mode_CH03/06/09_Total

Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH03	2422	-10.35	8
CH06	2437	-10.96	8
CH09	2452	-10.15	8