

Model nama:H30

Brand:Altice:

FCC ID:QPN-MOBIPHONE

Technical Specifications

Weight: 83.8g

Size: 135.1*50*16.2mm

Battery: 3.7 Li-on

For the network:

GSM900MHz/DCS1800MHz/GSM850MHz/PCS1900MHz
WCDMA2100/WCDMA900

Battery refer to the following table:

Battery Type	Battery Capacity	Talk time	Standby time
Li-battery	1000mAh	4.5hr	About 235hr

Battery Manufacturer: Ningbo Veken Weike Battery Co.,Ltd

Battery model: 178100170

Electric core mode: VK413857Ar 1000mAh

Notice:

The actual condition for mobile phones using has the relation to the network of the local environmental conditions, SIM card and the way using.

Warning:

For the consequences result by violating the following recommendations or using mobile phones In accurately, the manufacturers has no responsibility. Explain: If relate to the upgrades, without notice. The Company has the right for the final interpretation of this statement.

Table of Contents

1.	Quick start	7
	Icon Explain.....	7
	Install SIM card	7
	Installing Battery.....	8
	Battery Charging	8
	Switching on.....	8
2.	Call function	9
	Dialing telephone	9
	Receiving telephone.....	9
	Call in the menu	10
3.	Menu functions	11
	Call center	11
	Messaging.....	13
	Phonebook	15
	Settings	17
4.	Input methods	22
5.	Phone maintenance	23
6.	Accessories	25
7.	SAR	26

Foreword

Honorable mobile phone user, thank you for choosing our mobile phone!

Our cellular phone is according with the communication industry standards of PRC, and also according with the standards of European, and are approved for GSM networks.

Your phone may be used internationally with various networks depending on your roaming arrangements with your service provider.

To use this phone you must subscribe to a GSM service from a provider. We have included many features in this device but their function depends on the features available with your subscribed wireless network. Please contact your service provider for more information.

We strongly recommend you carefully read and understand this manual before using your phone in order to keep it under best conditions for your effective usage and utmost satisfaction.

Safety

Never attempt to disassemble your phone. You alone are responsible for how you use your phone and any consequences of its use.

As a general rule, always switch off your phone wherever the use of a phone is prohibited.

Use of your phone is subject to safety measures designed to protect users and their environment.

Do not use your phone in damp areas (bathroom, swimming pool...). Protect it from liquids and other

moisture.

Do not expose your phone to extreme temperatures lower than - 10°C and higher than + 40°C.

The physicochemical processes created by chargers impose temperature limits when charging the battery. Your phone automatically protects the batteries in extreme temperatures.

Do not leave your phone within the reach of small children (certain removable parts may be accidentally ingested).

Electrical safety

Only use the chargers listed in the manufacturer's catalogue. Using any other charger may be dangerous; it would also invalidate your warranty. Line voltage must be exactly the one indicated on the charger's serial plate.

Aircraft safety

When traveling by plane, you will need to switch your phone off when so instructed by the cabin crew or the warning signs. Using a mobile phone may be dangerous to the operation of the aircraft and may disrupt the phone network.

Its use is illegal and you could be prosecuted or banned from using cellular networks in the future if you do not abide by these regulations.

Explosive materials

Please comply with warning signs at petrol station when personnel asking you to switch your phone off. You will need to comply with radio equipment usage restrictions in places such as chemical plants, fuel depots and at any location where blasting operations are under way.

Electronic equipment

To avoid the risk of demagnetization, do not let electronic devices close to your phone for a long time.

Electronic medical equipment

Your phone is a radio transmitter which may interfere with

electronic medical equipment or implants, such as hearing aids, pacemakers, insulin pumps, etc. It is recommended that a minimum separation of 15 cm be maintained between the phone and an implant. Your doctor or the manufacturers of such equipment will be able to give you any advice you may need in this area.

Hospitals

Always make sure that your phone is switched off in hospitals when so instructed by warning signs or by medical staff.

Road safety

Do not use your phone when driving. In order to give your full attention to driving, stop and park safely before making a call. You must comply with any current legislation.

Distance of operation

This phone model has been tested and meets radiofrequency exposure guidelines when used

As follows:

- Against the ear: place or receive a phone call and hold the phone as you would a wire line telephone.
- Body worn: when transmitting, place the phone in a carry accessory that contains no metal and positions the phone a minimum of 15mm from your body. Use of other accessories may not ensure compliance with radiofrequency exposure guidelines. If you do not use a body worn accessory and are not holding the phone at the ear, position the phone a minimum of 15mm from your body,
- Data operation: when using a data feature, position the phone a minimum of 15mm from your body for the whole duration of the data transmission








Environmentally friendly disposal



Old electrical appliances must not be disposed of together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.

1. Quick start

Icon Explain

Icon	Function description
	Network signal strength: number of the more stronger the signal;
	Battery capacity number of the more power the more full;
	SMS SIM have unread SMS
	Missed call SIM have missed calls
	Used profiles The ringtone is silent
	Headset Plug in headset
	Key lock Show key and screen lock

Install SIM card

This phone supports one GSM SIM cards. Find SIM card's groove in the back of the phone and slide it completely there. During installation, please make sure the chip is facing downwards and pay attention to slot direction.

Note:

1. Keep SIM card out of children's touch.

2. Any abrasion or folding could easily damage SIM card, so please be extremely careful when you insert, Remove and preserve it.

3. Please make sure that you have cut off the power supply and have taken out battery before you remove SIM card.

Installing Battery

Align the battery chip with the metallic salient point in battery jar, insert the battery until it is inserted into the battery jar. Slide battery cover into back of the phone until it is locked.

Battery Charging

Unclose dustproof soft gum of attachment mode on the bottom of the phone, insert one end of the charger, i.e., the charging plug into attachment mode and the other end into electrical outlet, Screen will display the charging sign. After charging is finished, just pull out the plug.

Switching on

Long press **the Red key** to switch your phone on

1. If there is no SIM card, SIM card is defective, or SIM card contact is loose, you will be prompt with a warning after powering on, shut down and check your SIM and its installation.

2. If inserted GSM SIM card into the phone, meanwhile phone code and PIN code is turn on. When switched on, after entering the PIN code and phone code, the phone enter the standby mode by the current SIM.

3. If the phone detected authorized network, the screen will display network name and signal strength; If there is no authorized network is found, the phone can only make emergency calls or use non-communications features.

2. Call function

Dialing telephone

1. Direct dial

In standby mode, press the corresponding numeric keys to enter the phone number that you want to dial, including necessary area codes. Short Press the Right soft key [Clear] to delete one character, and Long Press delete all inputs, press the Green key to dial.

2. Making an International Call:

To make an international call, long press [0] key until the prefix symbol "+" of international call displays in screen.

3. Dialing from Phonebook

Enter the Phonebook via the menu, use the Up/Down Navigator keys to scroll to the desired contact, or press the first letter of the name of the desired contact as saved in your phonebook for quick access to names beginning with the letter then scroll to the desired, press the green key to dial.

4. Dialing from Call history

Enter the Call center (press the Green key from standby or via the menu), use the Up/ Down navigator keys to scroll to the desired contact, press the green key to dial.

5. Dial emergency service

You can directly dial the emergency service number without SIM card. Different networks use different urgency service numbers, so for details please inquire the network operation company.

Receiving telephone

When there is an incoming call, the phone will give corresponding alert, if your network supports caller ID, the screen will display caller's name or number (depending on whether there is information of the caller in your

phonebook).

1. Press the green key or press the Left soft key and confirm [Answer] to answer the incoming call.

2. If function of [call center/call settings/Advanced setting/Answer mode] is selected as [Any-key], press the any key to answer the incoming call except the Right soft key or the Red key.

3. If you do not want to answer an incoming call, press the Red key or the Right soft key [Reject] to reject it.

You can also press the Red key to end a call.

4. During a call, you can press the Up/Down navigator key to adjust receiver volume.

Call in the menu

During a call, press the right soft key can also open / close the hand-free function. press the left soft-key into the options:

- Hold/Retrieve single call*: The current call on hold or resume the call
- End single call*: end off the current call.
- Phonebook: enter the phonebook list of interfaces.
- Messaging: access to the message menu.
- Call history: access to call history list.
- Mute: mute on or off, open the case in the quiet do not send local voice.
- Volume: you can press the navigation to adjust the call volume.

Note:

Denotes menu items only appear in specific circumstances.

Such as: [Swap] exist only in the state of the phone and call the phone only appears to be suspended. At the same time for the conferencing, you need to the appropriate service provider to subscribe..

3. Menu functions

Call center

Call history

This phone can record all received, dialed and missed calls as well as their call time. Only when related function is supported by network and phone is switched on and in network service area, it can record the answered and missed calls. Call records may be accessed by pressing the Green key from standby or accessing through the menu.

Press the up/down navigation key to view the call history

Once on the call records list, press the Green key to make a call; press the OK key to view the details of current call record; press the left soft key to make the following options:

- View: View the details of current call record.
- Call: call current record.
- Send text message: send SMS to the select number
- Save to phonebook: Store the number as a phonebook entry.
- Delete: Delete the current call record.

Call timers

View all time for the Last call time; Total received time; Total dialed time and all call time; and press the left soft key can reset all time.

Call settings

Call waiting:

you can choose to Activate, Deactivate or Query status of this feature.

Activate this feature, if you call any other incoming call, the phone beeps, and the screen will display the caller number or name and call waiting information.

Call divert:

This feature allows you to play to your phone calls transferred to your voice mailbox or another phone number you specify. This function needs the support of network operator, please contact the network operator.

Transfer in the following ways, each way can be set to enable, disable, and query status. When turned on, the on-screen prompts to transfer the phone number.

Divert all voice call: Transfer all voice calls to your settings in the phone number or voice mail

Divert if unreachable: When your phone is off or not on the network service area, the transfer of all voice calls to your phone number or set voice mail

Divert if no answer: No answer transfer all voice calls to your phone number or set voice mail

Divert if busy: When the call is busy, the transfer of all voice calls to your phone number or set voice mail

Divert all data calls: Transfer all the data calls to the phone number you set, this function is supported by the network operator, please contact the network operator.

Cancel all diverts: cancel all call forwarding type.

Advanced settings

Auto redial:

You can enable or disable this feature, the feature is turned on, after the dial-up, then if the other party does not answer the phone over a period of time will be automatically re-dial, redial the number up to 10 times, in this period, the user can not call any other phone , to end the re-dial, simply press the right soft key to cancel.

Call time reminder: Can set the prompt type

Off: When the phone call, no minutes of tone.

Single: Select 1-3000 seconds after the prompt enter either of the time, when you call the phone at the time when prompted.

Periodic: Select 30-60 seconds after the input in any one

time, when you call for every minute the phone will be reminded of the time.

Answer mode:

Any key: Select the feature, all incoming calls, in addition to the red key and right soft keys, all keys can answer the call

Auto answer when headset mode: Enable this feature, when the phone is in headset mode, there are about 2 seconds after the incoming call, the phone will automatically answer the call.

Messaging

Message service is a network dependent function, which allows you to send, receive and edit all kinds of messages. Please contact the network operator for more details.

Write message

Edit a new SMS, save or send it to the recipient.

Note:

To send SMS, you need to set the correct SMS service center number which can be obtained from network provider.

While editing, press the # key to change input method, a text message can be up to 612 characters in length.

Press the OK Key, into add recipient interface, you can enter number and add from phonebook, you can add one number or more number, press the Left Soft key to select options when editing:

-Send to: Enter the destination number is sent, or press OK into the address book to find the necessary records, you can select the type of SIM card, confirmed, you can send

-Input method: you can set input method accord you need.

-Advanced: can select insert number and insert name option

-Save: Save the edited message to the Drafts box

Inbox

Received SMS messages can be stored either in phone or in SIM memory, and are accessed here.

When you have received a message, the tones or vibration to alert you and message mark will also be shown on the screen. Press the Left soft key [Read] or the OK key to read the new message, press the Right soft key [Back] to return, and you can also access the inbox to read the new message.

If the message memory is full, the indication "Memory full" and the message icon will be shown on the screen and flashed. Before you can receive new messages, delete some of your old messages in the inbox folder. If the capacity of new messages is beyond the capacity of the inbox, the information will be lost and incomplete.

In message list, press the OK key to read the selected message, press the Left soft key [Options] to make the following menu:

- Reply: Reply by SMS to the message sender directly.
- Call Sender: Select to call the sender number
- Forward: forward the current message to other number.
- Delete: Delete the messages.
- Save to phonebook: Save the information in the sender number to the phonebook.

Outbox

Failed to send SMS, will be stored in the mail within, the operation is the same with inbox.

Drafts

Not send SMS, will be stored in the mail within, the operation is the same with inbox

Sent messages

If SMS is sent successfully, then be stored in the sent messages box. But Automatically save messages need to

select [messaging—SMS settings—Save sent message—press the right navigation key to open the function], other operation is the same with inbox.

SMS Settings

SIM

SMSC address: You can edit the SMSC number, but if you edit incorrect number, the message will not send.

Delivery report: Open the function, after a successful send text messages, the system will return to report.

Reply path: If the network allows, open the function, the recipient receives a text message, the system will send a confirmation message.

Voicemail server: When you can't answer the phone, automatically incoming calls to voice mail number, you can let the other party to your message, a message stored in the network's voice mail system, and afterwards, you can access the voice mail system to listen to a message.

Into the voice mail sub-menu, you can see the current voice message (up to the establishment of two voice mail)

Voice mail function needs the support of network operator, you may need to subscribe to the service. For details, please contact with the operator.

Memory status: can view the memory storage status.

Save sent message: open the function, After the success of SMS will be automatically saved in the sent messages box.

Preferred storage: you can choose to give priority to messages stored in SIM card or mobile phone.

Phonebook

The Phone for your well-prepared high-capacity phone storage space. You can use the phone's contacts feature to save the contact name, number and caller ring-tone.

The phone can save 500 phonebook records, SIM card

number of records stored phone numbers vary because of their capacity.

Add new contact

-To SIM: New records added to the SIM, each name can only be stored under a number.

-To Phone: you can input name, number and set caller ring-tone. This Records stored in your phone.

Quick search

In order to facilitate you to quickly search the phone book to the desired number, the phone prompts you to quickly find features.

In the contact list interface, you press # key to switch input method, enter the contact name of the first characters to locate search.

After searching for the name, press the Green key to dial the number and press the Red key to end dialing.

Browse contacts

In the phonebook list screen, press the up / down navigation key to select the contact record, press the green key to dial the number in the record, then the red key to end the dialing. Press the OK Key to display the details of the selected record. In the phonebook list screen, select either the phonebook record, press the left key to perform the following operation:

- View: view the select
- Send text message: send SMS to the select number
- Call: call the select number
- Edit: you can edit the select record
- Delete: Delete the select record
- Copy: this record can copy to "SIM" or "phone"
- Phonebook settings:
 - Extra numbers: set this number to own number
 - Memory Status: Query "SIM", "phone" memory address

book using status

Settings

Time and date

Set time/date: Under this you can set the phone to the current date and time. The phone allows you to set the date range of calendar 2000 to 2030.

Set format: Under this you can set the time and date display format

Language

Under this you can choose the language provided by the phone.

Ringtone

Ring type: Press the OK key to select: Repeat or Beep once

Ringtone: There are four built-in ring tones to choose for you, and you may also to choose your favorite audio file as your ring-tone from file management.

Ring-tone volume: Press the navigation key to adjust the ring-tone volume.

Message: There are five built-in ring tones to choose for you, and you may also to choose your favorite audio file as your ring-tone from file management.

Message volume: Press the navigation key to adjust the ring-tone volume.

Keypad: Press the navigation key to select click, or tone.

Key-tone volume: Press the navigation key to adjust the key-tone volume.

Display

Wallpaper: The standby interface is used to set the background wallpaper.

You can choose from the built-in wallpaper can also be selected from File Manager image file.

Screen auto lock:

Under this you can set the time to open or close the keyboard lock keyboard lock feature. Set the keyboard lock time, the idle screen, mobile phone within the set time the keyboard does not perform any operation, it will be automatically locked, then you can long press the * key to unlock.

Show date and time: You can set the idle screen time display on or off.

LCD backlight: Under this function can be press the left or right navigation key to adjust the brightness and LCD backlight time.

Security settings

SIM security

You can use the PIN code, PIN2 code, set the boot password and set security features to protect information security.

PIN password (PIN1) is the SIM card PIN. If the user don't changes the password, the original password is 1234 or 0000. If you enable the boot PIN code, then after each start 4-digit PIN code is necessary to input, PIN code can be amended, to protect their SIM card is not used by others. Note that, if the input PIN code wrong three times, the phone card will automatically lock and unlock prompted to enter PUK code, this time close to the edge of danger, so if unauthorized modification of the PIN code, we must bear in mind.

PUK password (PUK1) from consists of 8 digits, which users can not change. PIN code when the phone is locked, and when prompted enter the PUK password, do not act rashly, because the PUK code input opportunities is only 10 times and if enter the wrong words for 10 times, SIM card will be permanently locked, that is scrapped. Part of the SIM card PUK code is never used when the user comes with the card, while the other part of the network

operators will need to obtain the PIN code if you do not know the PUK code locked, do not random input, then the correct way is to call the SIM card hotline operators, after a simple user data are verified, you can obtain the PUK password to unlock the phone lock, the service is free of charge.

Note: Please use this feature with caution, if forget PUK password, please contact the network operator. If input PUK code in error for 10 times consecutively , SIM card will be scrapped.

PIN lock

Under this you can enable or disable PIN password, PIN code on or off are required to enter the correct PIN password. When open this feature, every time you turn the phone prompts you to enter the PIN password.

Change PIN

If the current PIN password is already open, you can make changes to the PIN password. First enter the old PIN password, after repeated twice to determine and identify new password.

Change PIN2

PIN2 (PersonalIdentificationNumber2) password is to enter a particular function (such as setting a fixed number, set the call billing, etc.) to enter the personal identification number.

Pin2 password is provided by suppliers for SIM card to another password, used to qualify the dial personal identification password, Mainly used to eliminate the call cost information, set the phone calls and the billing currency unit, the cost limit function, limited dial-up ("Security settings "---" limited dial-up" can only be opened after the phone call which can be used to set the number and do not call this). My phone's SIM card predictive value

is 12345. Pin2 after input error password 3 will be locked, needed Puk2 to unlock.

PIN2 password is used to set the phone billing. If you enter three times wrong, the phone will need PUK2 unlock password, the process described in the previous PIN password, PUK password the same. However, both the password and network SIM card billing and modify the internal data, it will not open, and even if PIN2 password locked, it will not affect the normal use of mobile phones. Thus PIN2 password, and not to deliberately ignore PUK2 password.

Note:

Please use this feature with caution, If input PUK code in error for 10 times consecutively, SIM card will be scrapped..

Phone security

Under this password there you can set the phone to avoid unauthorized use of your mobile phone

Phone lock

Under this you can enable or disable phone password, phone password on or off are required to enter the correct phone password. When open this feature, every time you turn the phone prompts you to enter the phone password.

Change password

You can make changes to the phone password. First enter the old phone password, after repeated twice to determine and identify new password.

Services

SIM

The phone supports value-added services provided by the SIM, different network operators to provide different types of services, and the menu is shown only if your SIM card supports. The name and contents of the menu depend on the available services. Ask your network availability, price,

and information on the SIM card service operators Advisory.

Mode

This optional mode in which the phone is on line or off line, if you choose off line mode, the phone can only use some of the functions of non-communications.

Restore settings

Reset the parameter value mobile phone, make your phone reset to default settings. Please enter a privacy password (initial password is 0000), restore factory settings.

4. Input methods

This phone provides diversified input modes for you to enter letter information when editing SMS and adding phonebook.

Use the # key to switch between different input methods.

When editing the key controls:

The Right soft key: Press to clear one character, long press to clear all.

The End/Power key: Return to the idle screen.

[*] key: In every input status, press this key to call out punctuation and symbol input frame.

ABC (abc) input method

Each key is used to input several characters. Fast and repeatedly press key until your required character appears.

When you need to input English punctuation and some special signs, press the [*] numeric key to call out special sign input box in English input status

Press the [0] key to input blank once.

The Numeric input method

To input numerical values, press the respective numeric keys.

5. Phone maintenance

Mobile is a high-precision electronic products, please carefully maintained. The following suggestions can help you maintain phone, to extend the lifespan:

Phone and its accessories should be placed out of the reach of children.

Keep the device dry. Rain, humidity or moisture will corrode the circuit board. If the phone is accidentally flooded, shall promptly remove the battery, and immediately sent to a local authorized service center for processing.

Do not place your phone in dusty places, this may affect the normal use of mobile phones. LCD display is easily damaged cell phone parts, mobile phone dropped onto the ground should be avoided or be strong vibration; prohibit the use of sharp objects to touch the screen.

Do not place the phone where the temperature is too high. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt plastic shell phone.

Do not place the phone where the temperature is too low. Otherwise, when the phone temperature to normal temperature, moisture will be generated internally, could damage the device electronic circuit boards. Do not drop, knock or severe shaking the phone, so as not to damage the internal circuit boards and precision mobile structure.

Do not use chemicals, cleaning solvents or strong detergents to clean the device, apply a soft cloth soaked in soapy water and gently scrub. Do not use paint pigment cell phone to avoid moving parts and be stuck to proper operation.

Use a clean soft lens cleaning cloth. Such as: camera lens.


Replacement antenna, use only the supplied or designated by the antenna. Use of unauthorized antennas, cell phone accessories or modifications, could damage the device and may violate regulations governing radio devices.

6. Accessories

Use only batteries, chargers, and accessories approved by the manufacturer with this device. Use of any other types will invalidate the warranty and may be dangerous. Check with your dealer for available accessories. You may opt to buy:

Extra Battery

Extra batteries of various capacities are available from our company or through your dealer. For applicable power supplies see user instruction

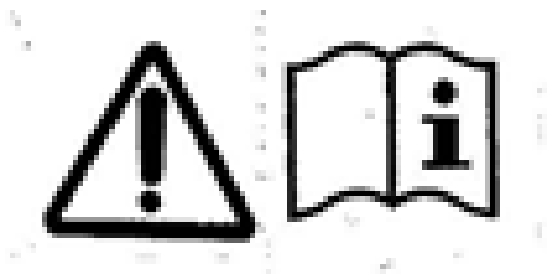

Charger Plug, charger cable

Charger plug used to connect with the charger cable for charging on wall outlets. Also you can use the charger cable to connect with the other devices such as the personal computers to charge the phone.

Charging time is about 2 to 3 hours. The charging condition is displayed on screen. You may use your phone while charging.

Earphone

A mini, practical, hands-free device; you can use its button to answer and end calls. Some models may also come with a volume control knob.

Do not plug or unplug the earphone when connecting dialed or incoming calls.

Please to adjust the incoming call alert volume to the felicitousness before you plug in the earphone.

7. SAR

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC ID:QPN-MOBIPHONE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Body-worn Operation

This device was tested for typical body-worn operations. To comply With RF exposure requirements, a minimum separation distance of 1.0cm must be maintained between the user's body and the handset, including the antenna.

Third-party belt-clips, holsters, and similar including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided.

Specific Absorption Rate (SAR) information:

This wireless phone meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health.

FCC RF Exposure Information and Statement The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types:NL185-X1808 has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use at the ear is 0.624W/kg and when properly worn on the body is 1.583W/kg. This device was tested for typical body-worn operations with the back of the handset kept 1cm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 1cm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic

components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

Your mobile phone is rated: «For Hearing Aid», to assist hearing device users in finding mobile phones that may be compatible with their hearing devices. This device is HAC M4/T3 compatible. This phone has been tested and rated for use with hearing aids for some of the wireless technologies that it uses. However, there may be some newer wireless technologies used in this phone that have not been tested yet for use with hearing aids. It is important to try the different features of this phone thoroughly and in different locations, using your hearing aid or cochlear implant, to determine if you hear any interfering noise. Consult your service provider or the manufacturer of this phone for information on hearing aid compatibility. If you have questions about return or exchange policies, consult your service provider or phone retailer.