

DASY3

Dipole Validation Kit

Type: D1800V2

Serial: 294

Manufactured: March 22, 2001

Calibrated: April 19, 2001

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

1800 MHz System Validation Dipole

Type:

D1800V2

Serial Number:

294

Place of Calibration:

Zurich

Date of Calibration:

Apr. 19, 2001


Calibration Interval:

24 months


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:



Approved by:



1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with head simulating sugar solution of the following electrical parameters at 1800 MHz:

Relative permittivity	39.7	$\pm 5\%$
Conductivity	1.36 mho/m	$\pm 10\%$

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.57 at 1800 MHz) was used for the measurements.

The dipole feedpoint was positioned below the centre marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole centre to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging. The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalised to 1W input power.

2. SAR Measurement


Standard SAR-measurements were performed with the head phantom according to the measurement conditions described in section 1. The results (see figure) have been normalised to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm ³ (1 g) of tissue:	38.4 mW/g
averaged over 10 cm ³ (10 g) of tissue:	20.0 mW/g

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well. The estimated sensitivities of SAR-values and penetration depths to the liquid parameters are listed in the DASY Application Note 4: 'SAR Sensitivities'.

Validation Dipole D1800V2 SN:294, d = 10 mm

Frequency: 1800 MHz; Antenna Input Power: 250 [mW]
 Generic Twin Phantom; Flat Section; Grid Spacing: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Probe: ET3DV6 - SN1507; ConvF(5.57,5.57,5.57) at 1800 MHz; IEEE1528 1800 MHz; $\sigma = 1.36$ mho/m $\epsilon_r = 39.7$ $\rho = 1.00$ g/cm³
 Cubes (2): Peak: 18.0 mW/g ± 0.04 dB, SAR (1g): 9.59 mW/g ± 0.04 dB, SAR (10g): 4.99 mW/g ± 0.04 dB, (Worst-case extrapolation)
 Penetration depth: 8.3 (7.7, 9.4) [mm]
 Powerdrift: -0.04 dB

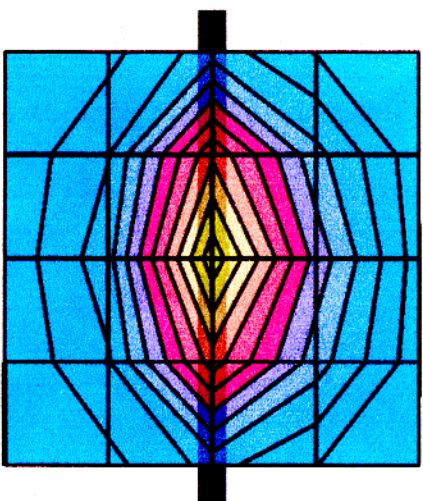

SAR_{tot} [mW/g]



CH1 S11 1 U FS


1: 51.816 Ω -2.8066 Ω 31.504 pF

1 800.000 000 MHz

PRM
Del

Cor
Avg
16

↑

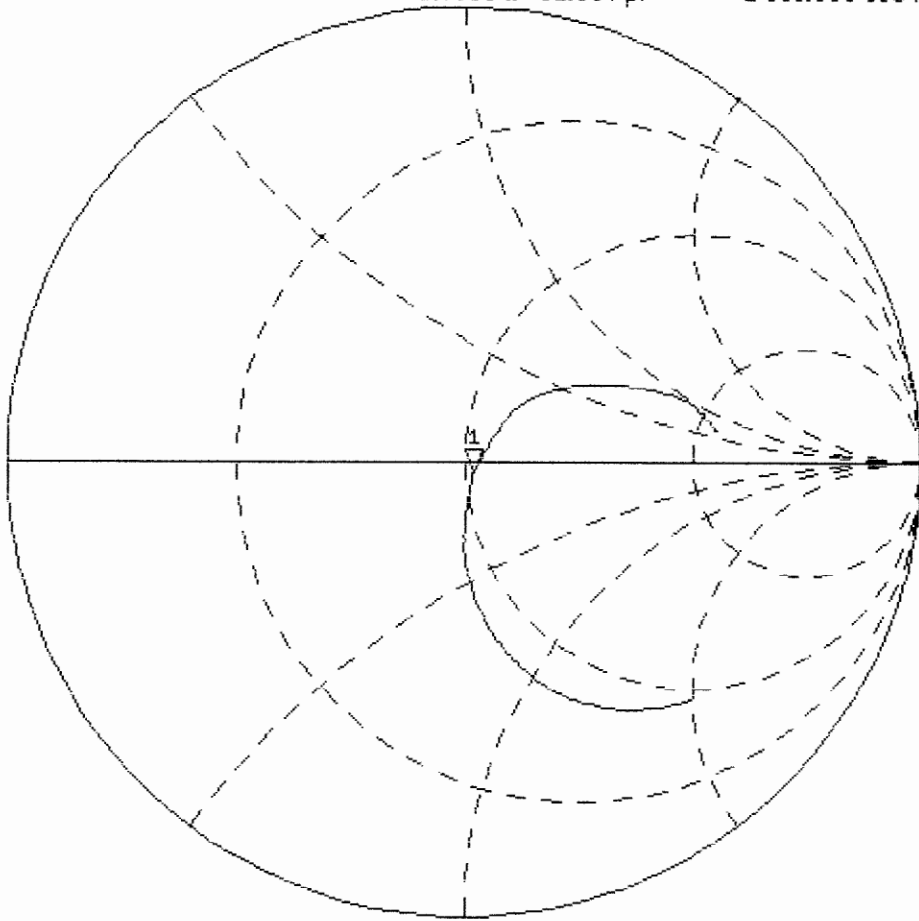


START 1 400.000 000 MHz

STOP 2 200.000 000 MHz

17 Apr 2001 15:51:14

[CH1] S11 LOG 5 dB/REF 0 dB

1:-29.661 dB 1 800.000 000 MHz

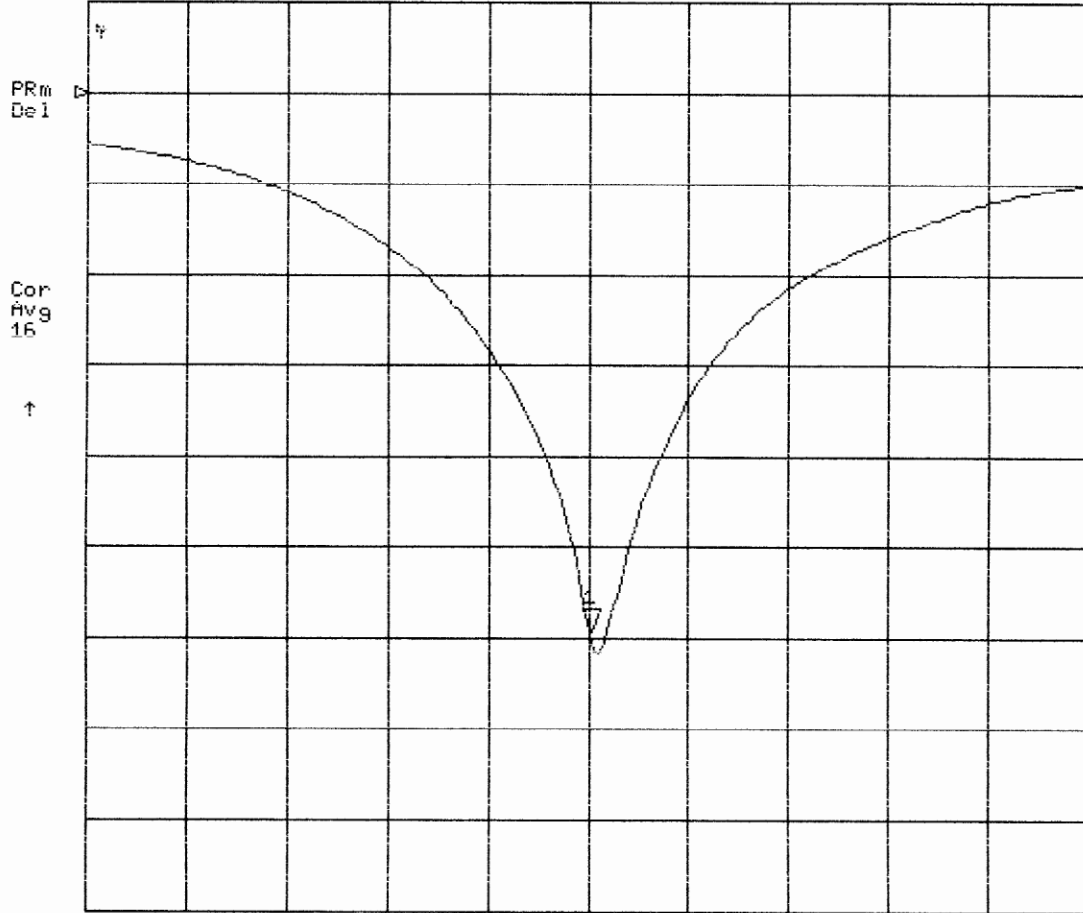

START 1 400.000 000 MHz

STOP 2 2000.000 000 MHz