
GSM850 test report for NHL-12

CONTENTS

1	LABORATORY INFORMATION	4
2	CUSTOMER INFORMATION	4
3	SUMMARY OF TEST RESULTS.....	5
4	EUT INFORMATION.....	6
4.1	EUT description	6
5	EUT TEST SETUPS	6
6	APPLICABLE STANDARDS.....	6
7	RADIATED RF OUTPUT POWER	7
7.1	Test setup	7
7.2	Test method	7
7.3	EUT operation mode.....	8
7.4	Limit	8
7.5	Results	8
7.6	EUT operation mode.....	9
7.7	Limit	9
7.8	Results	9
8	99% OCCUPIED BANDWIDTH.....	10
8.1	Test setup	10
8.2	EUT operation mode.....	10
8.3	Results	10
8.4	Screen shots	11
8.5	EUT operation mode.....	12
8.6	Results	12
9	BANDEdge COMPLIANCE	13
9.1	Test setup	13
9.2	EUT operation mode.....	13
9.3	Limit	13
9.4	Results	14
9.5	Screen shots	14
9.6	EUT operation mode.....	16
9.7	Limit	16
9.8	Results	16
9.9	Screen shots	17
10	SPURIOUS RADIATED EMISSION	19
10.1	Test setup	19
10.2	Test method	19
10.3	EUT operation mode.....	20
10.4	Limit	20
10.5	Results	20
10.6	EUT operation mode.....	21
10.7	Limit	21
10.8	Results	21
11	FREQUENCY STABILITY, TEMPERATURE VARIATION	22
11.1	Test setup	22
11.2	Limit	22
11.3	Test method	22
11.4	EUT operation mode.....	23
11.5	Results	23
12	FREQUENCY STABILITY, VOLTAGE VARIATION	24
12.1	Test setup	24
12.2	EUT operation mode.....	24
12.3	Limit	24
12.4	Test method	24

12.5	Results.....	24
13	TEST EQUIPMENT	25
13.1	Conducted measurements	25
13.2	Radiated measurements	25
14	TEST SETUP PHOTOGRAPHS.....	26

Tampere

1 LABORATORY INFORMATION


Test laboratory:	TCC Tampere Sinitaival 5 FIN-33720 TAMPERE Tel. +358 7180 46800 Fax. +358 7180 46880
FCC registration number: IC file number:	94436 (June 14, 2002) IC 3608 (March 5, 2003)

2 CUSTOMER INFORMATION

Client:	Nokia Corporation Multimedia Imaging BU Mattilanniemi 6-8 FIN-40100 JYVÄSKYLÄ FINLAND Tel. +358-71-8008000 Fax. +358-71-8078000
Contact person:	Mikael Honkanen
Receipt of EUT:	7.1.2004
Date of testing:	23.1-23.2.2004
Date of report:	17.3.2004

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 22 and IC standard RSS-132.

Contents approved:


Asko Välimäki Quality Manager

Tampere

3 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in RSS-132		Result
§2.1046 (a), 22.913 (a)	6.4	Conducted RF output power	-
§22.913 (a)	6.4	Radiated RF output power	PASS
§2.1049 (h)	4.2	99% occupied bandwidth	PASS
§22.917 (e)	4.5	Bandedge compliance	PASS
§22.917 (e), §2.1051	4.5	Spurious emissions at antenna terminals	-
§22.917 (e), §2.1053	4.5	Spurious radiated emission	PASS
§2.1055 (a)(1)(b)	6.3	Frequency stability, temperature variation	PASS
§2.1055 (d)(1)(2)	6.3	Frequency stability, voltage variation	PASS

PASS Pass
FAIL Fail
X Measured, but there is no applicable performance criteria
- Not done

4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Device	Type	S/N	EUT number
EUT	GSM Phone	NHL-12	004400231656917	3376
	GSM Phone	NHL-12	004400231656834	3392
Accessories	Battery	BL-5C	067040063563311211	3394
	Battery	BL-5C	067039880257341411	3386
	Memory card	DTS-32	A200EJ85221	3377
	Memory card	DTS-32	-	3393
	Dummy battery	-	-	3343

Notes: -

4.1 EUT description

The EUT is a triple band (850 MHz/1800 MHz/1900 MHz) E-GPRS (Edge) GSM mobile phone with bluetooth.

The EUT was not modified during the tests.

5 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

The test setup photographs are in a separate document as referenced in section 14.

6 APPLICABLE STANDARDS


The tests were performed in guidance of CFR 47 part 22, part 2, ANSI/TIA/EIA-603-A and RSS-132. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

7 RADIATED RF OUTPUT POWER

EUT	03392		
Accessories	03394, 03393		
Temp, Humidity, Air Pressure	21°C	45RH%	997 mbar
Date of measurement	7.2.2004		
FCC rule part	§22.913 (a)		
RSS-132 section	6.4		
Measured by	Jari Jantunen		
Result	PASS		

7.1 Test setup

The EUT was set on a non-conductive turntable in a semi anechoic chamber. In the corner of the chamber there was a communication antenna, which was connected to the BS simulator located outside the chamber. The radiated power from the EUT was measured with an antenna fixed to a antenna tower. The tower and turn table were remotely controlled to turn the EUT and change the antenna polarization. The measured signal was routed from the measuring antenna to the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

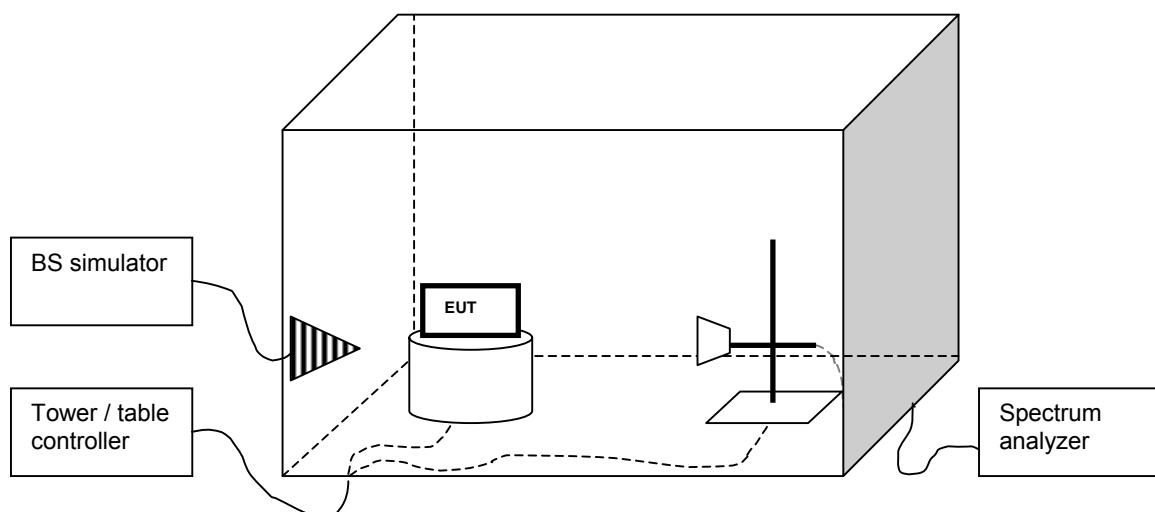

7.2 Test method

- The maximum power level was searched by moving the turn table and measuring antenna and manipulating the EUT. This level (P_{EUT}) was recorded.
- The EUT was replaced with a substituting antenna.
- The substituting antenna was fed with the power (P_{Subst_TX}) giving a convenient reading on the spectrum analyzer. That reading (P_{Subst_RX}) on spectrum analyzer was recorded.

7.3 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation. GMSK modulation
EUT channel	128, 190, 251
EUT TX power level	4 (33dBm)

7.4 Limit

ERP [W]	
FCC	≤ 7
IC	≤ 6.3

7.5 Results

The formula below was used to calculate the ERP.

$$P_{ERP[W]} = \frac{10^{(P_{Subst_TX[dBm]} + (P_{EUT[dBm]} - P_{Subst_RX[dBm]}) + G_{Substitute_antenna[dBd]} - L_{Cable[dB]})/10}}{1000}$$

where the variables are as follows:

$P_{EUT[dBm]}$	Measured power level (from step a in 7.2) from the EUT
$P_{Subst_TX[dBm]}$	Power (from step c in 7.2) fed to the substituting antenna
$P_{Subst_RX[dBm]}$	Power (from step c in 7.2) received with the spectrum analyzer
$G_{Substitute_antenna[dBd]}$	Gain of the substitutive antenna over dipole (dBi – 2.15dB)
$L_{Cable[dB]}$	Loss of the cable between signal generator and the substituting antenna

Table 1 Radiated RF output power

EUT Channel	$P_{EUT[dBm]}$	$P_{Subst_TX[dBm]}$	$P_{Subst_RX[dBm]}$	Cable loss [dB]	Antenna gain [dBd]	ERP [dBm]	ERP [W]
128	-6.19	+10	-30.94	4.02	-0.95	30.48	1.1168
190	-5.22	+10	-30.46	4.02	-0.45	30.77	1.1939
251	-7.05	+10	-31.76	4.13	-0.25	29.63	0.9183

7.6 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation. 8PSK modulation (EDGE)
EUT channel	128, 190, 251
EUT TX power level	4 (33dBm)

7.7 Limit

ERP [W]	
FCC	≤ 7
IC	≤ 6.3

7.8 Results

The formula below was used to calculate the ERP.

$$P_{ERP[W]} = \frac{10^{(P_{Subst_TX}[dBm] + (P_{EUT}[dBm] - P_{Subst_RX}[dBm]) + G_{Substitute_antenna}[dBd] - L_{Cable}[dB]) / 10}}{1000}$$

where the variables are as follows:

P_{EUT} [dBm]	Measured power level (from step a in 7.2) from the EUT
P_{Subst_TX} [dBm]	Power (from step c in 7.2) fed to the substituting antenna
P_{Subst_RX} [dBm]	Power (from step c in 7.2) received with the spectrum analyzer
$G_{Substitute_antenna}$ [dBd]	Gain of the substitutive antenna over dipole (dBi – 2.15dB)
L_{Cable} [dB]	Loss of the cable between signal generator and the substituting antenna

Table 2 Radiated RF output power


EUT Channel	P_{EUT} [dBm]	P_{Subst_TX} [dBm]	P_{Subst_RX} [dBm]	Cable loss [dB]	Antenna gain [dBd]	ERP [dBm]	ERP [W]
128	-9.17	+10	-30.94	4.02	-0.95	27.50	0.5623
190	-8.69	+10	-30.46	4.02	-0.45	27.30	0.5370
251	-10.18	+10	-31.76	4.13	-0.25	26.50	0.4467

8 99% OCCUPIED BANDWIDTH

EUT	3376		
Accessories	3377, 3386		
Temp, Humidity, Air Pressure	20°C	55RH%	999mbar
Date of measurement	9.2.2004		
FCC rule part	§2.1049 (h)		
RSS-132 section	4.2		
Measured by	Jan-Erik Lilja		

8.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

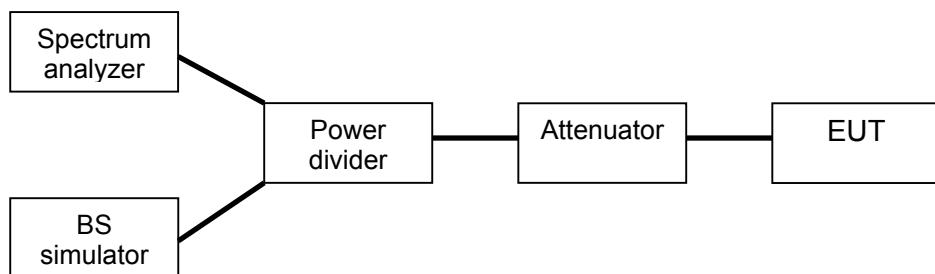

8.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 modulation
EUT channel	190
EUT TX power level	4 (33dBm)

8.3 Results


The 99% occupied bandwidth was measured using the in-built function of the spectrum analyzer.

Table 3 99% occupied bandwidth

EUT Channel	99% occupied bandwidth [kHz]
190	237.180

Tampere

8.4 Screen shots

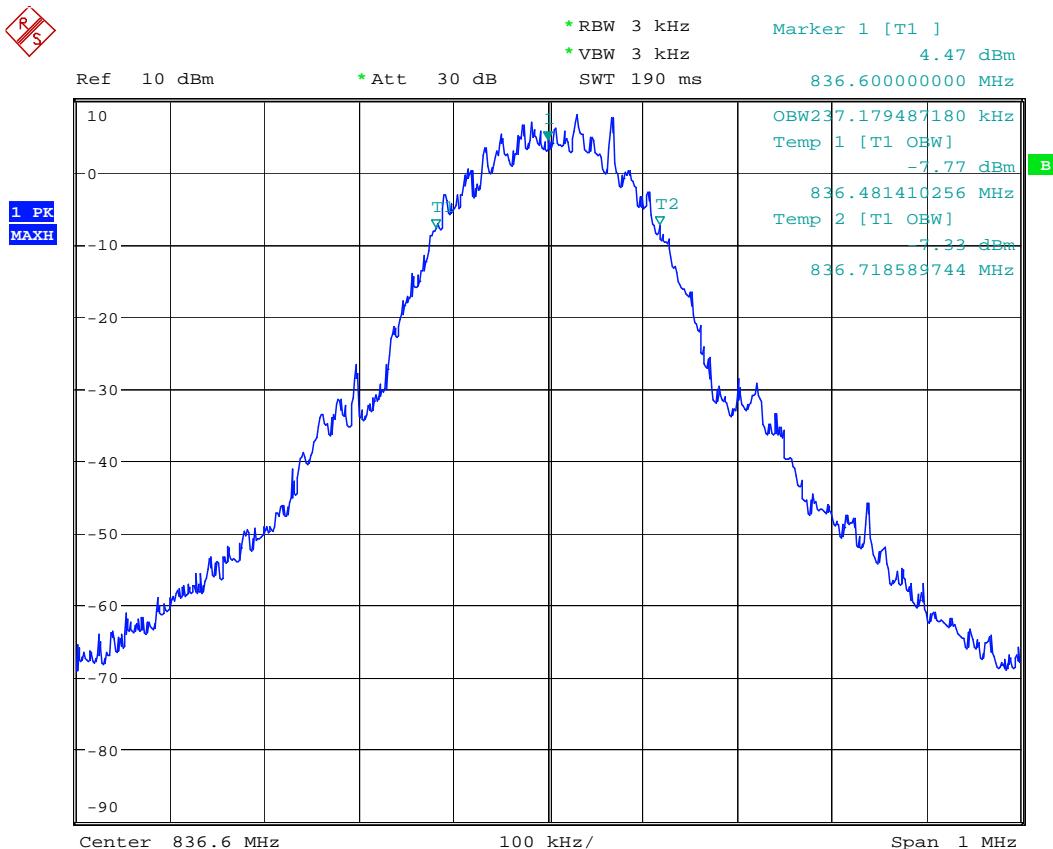

Date: 9.FEB.2004 16:37:39

Figure 1 99% occupied bandwidth GMSK modulation, channel 190

Tampere

8.5 EUT operation mode


EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation, 8PSK modulation
EUT channel	190
EUT TX power level	4 (33dBm)

8.6 Results

The 99% occupied bandwidth was measured using the in-built function of the spectrum analyzer.

Table 4 99% occupied bandwidth

EUT Channel	99% occupied bandwidth [kHz]
190	241.987

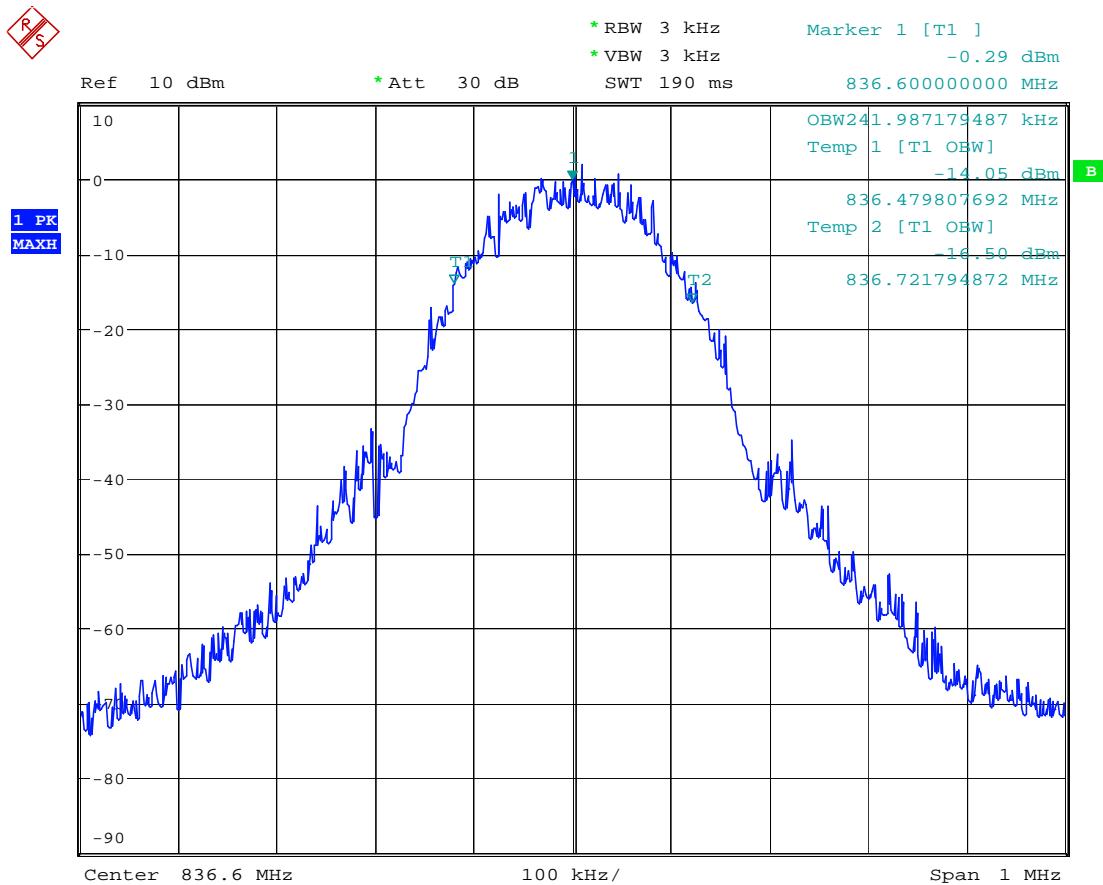

Date: 9.FEB.2004 16:47:27

Figure 2 99% occupied bandwidth 8PSK modulation, channel 190


9 BANDEDGE COMPLIANCE

EUT	03392		
Accessories	03393, 03394		
Temp, Humidity, Air Pressure	22 °C	45 RH%	1007 mbar
Date of measurement	9.2.2004		
FCC rule part	§22.917 (e)		
RSS-132 section	4.5		
Measured by	Jari Jantunen		
Result	PASS		

9.1 Test setup

This measurement was performed in conjunction of the ERP measurement

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

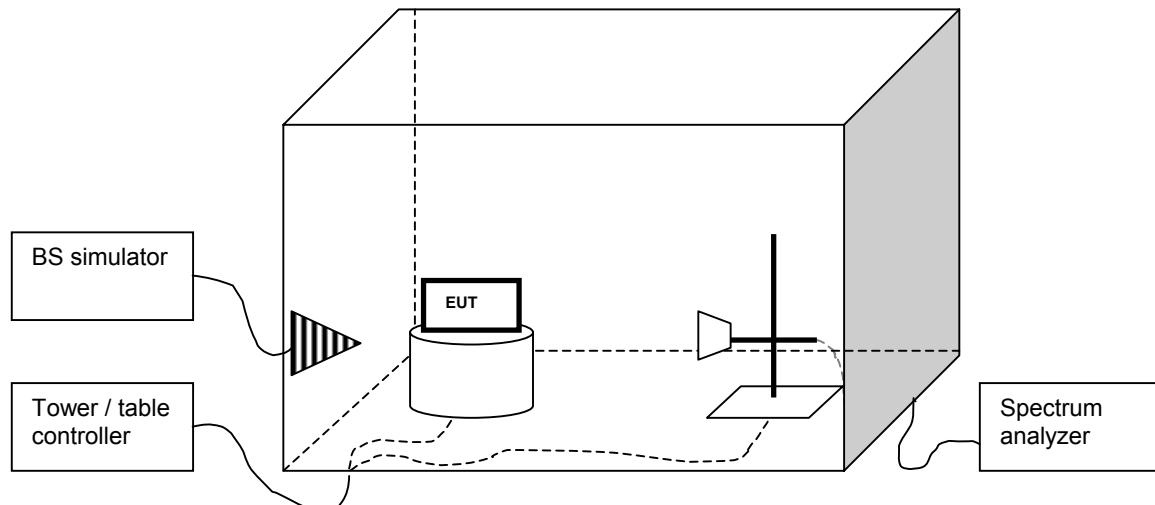

9.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation. GMSK modulation
EUT channel	See section 9.4
EUT TX power level	4 (+33dBm)

9.3 Limit

Frequency [MHz]	Level [dBm]
<824.0 or 849.0<	-13

9.4 Results

The line in the screen shots is the -13dBm limit line. The results were corrected with measurement path loss set as "offset" in the spectrum analyzer.

Table 5 Lower and upper bandedge

EUT Channel	Level [dBm]
128	-13.29
251	-15.44

9.5 Screen shots

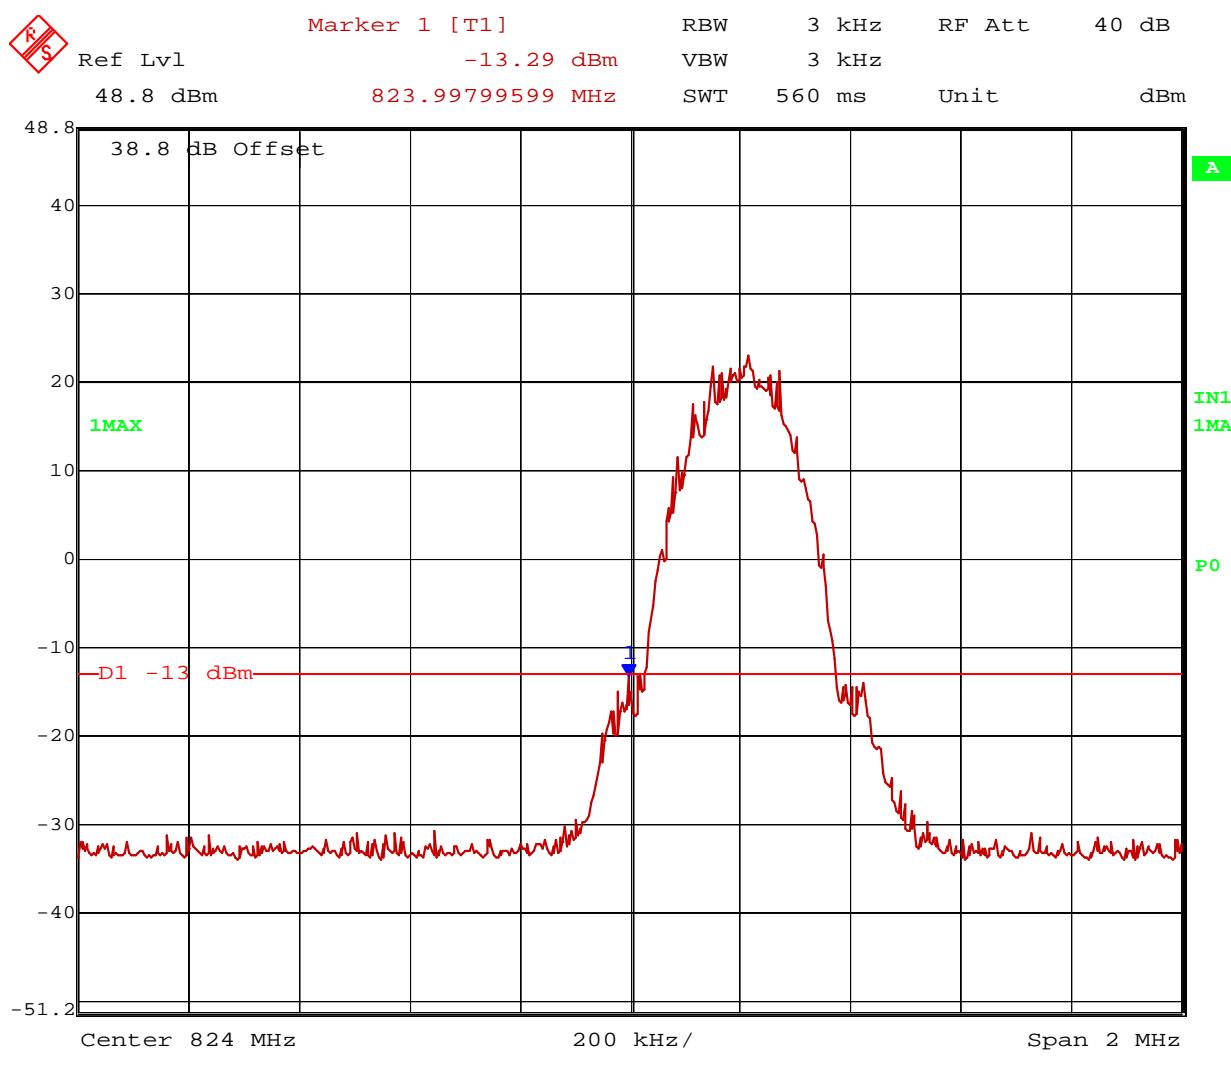


Figure 3 Lower bandedge, channel 128

Tampere

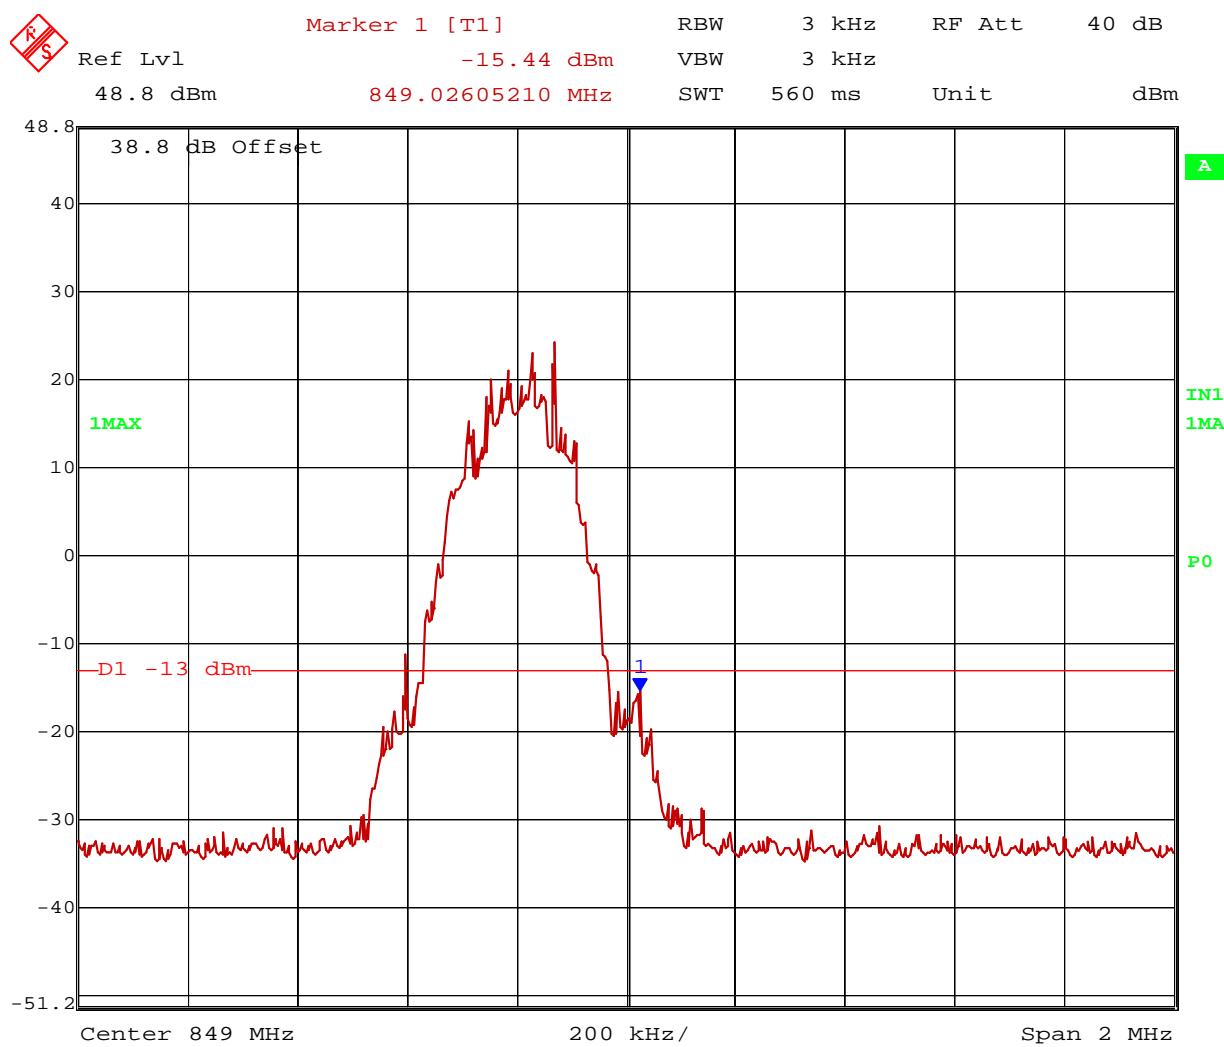


Figure 4 Upper bandedge, channel 251

9.6 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation. 8PSK modulation (EDGE)
EUT channel	See section 9.4
EUT TX power level	4 (+33dBm)

9.7 Limit

Frequency [MHz]	Level [dBm]
<824.0 or 849.0<	-13

9.8 Results

The line in the screen shots is the -13 dBm limit line. The results were corrected with measurement path loss set as "offset" in the spectrum analyzer.

Table 6 Lower and upper bandedge

EUT Channel	Level [dBm]
128	-22.59
251	-21.19

Tampere

9.9 Screen shots


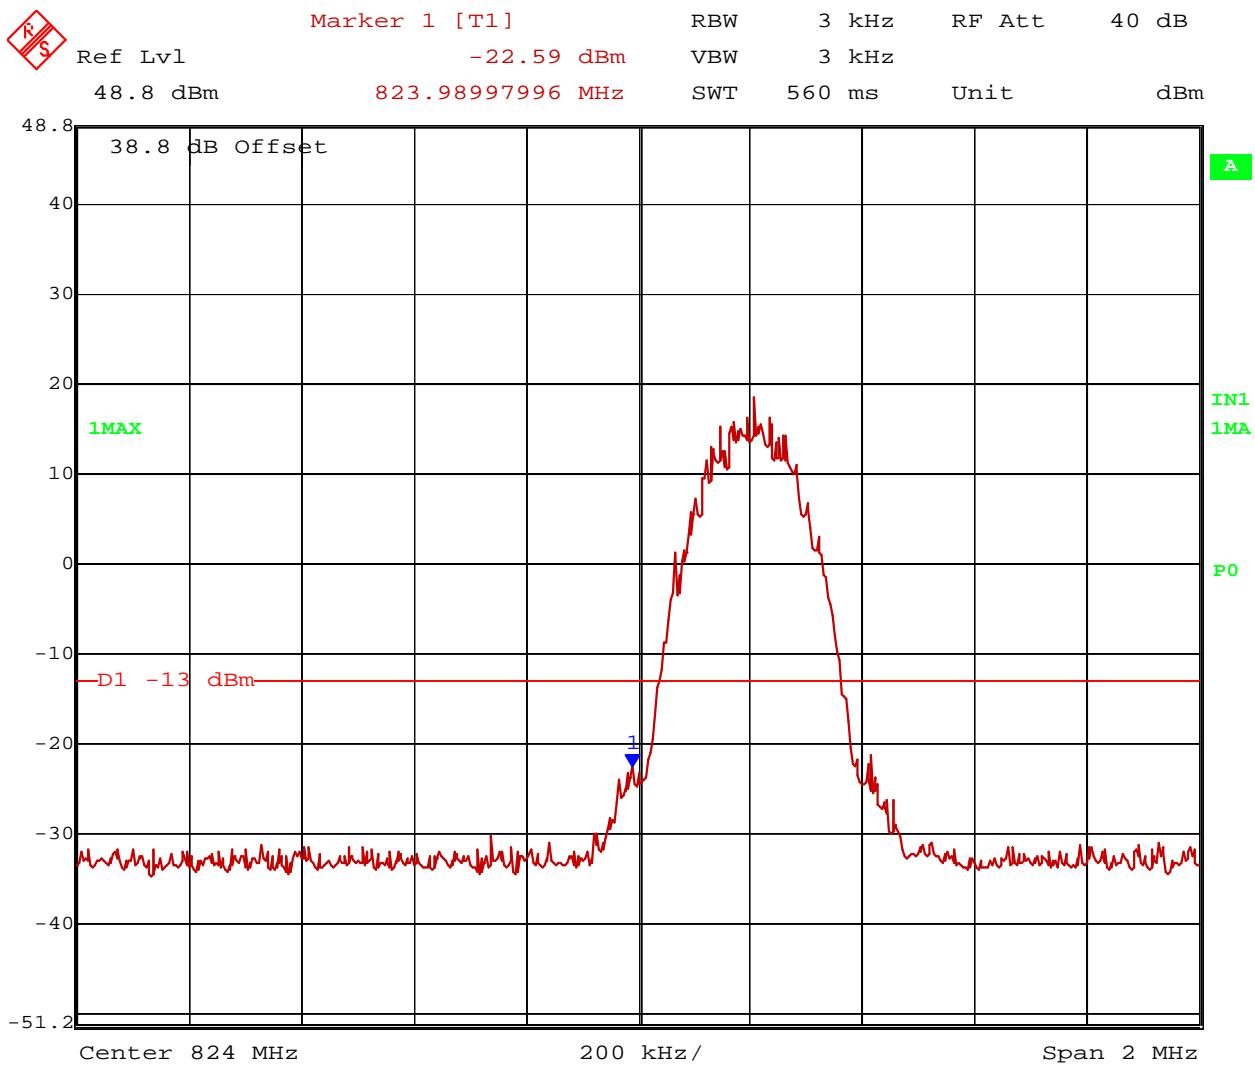


Figure 5 Lower bandedge, channel 128

Tampere

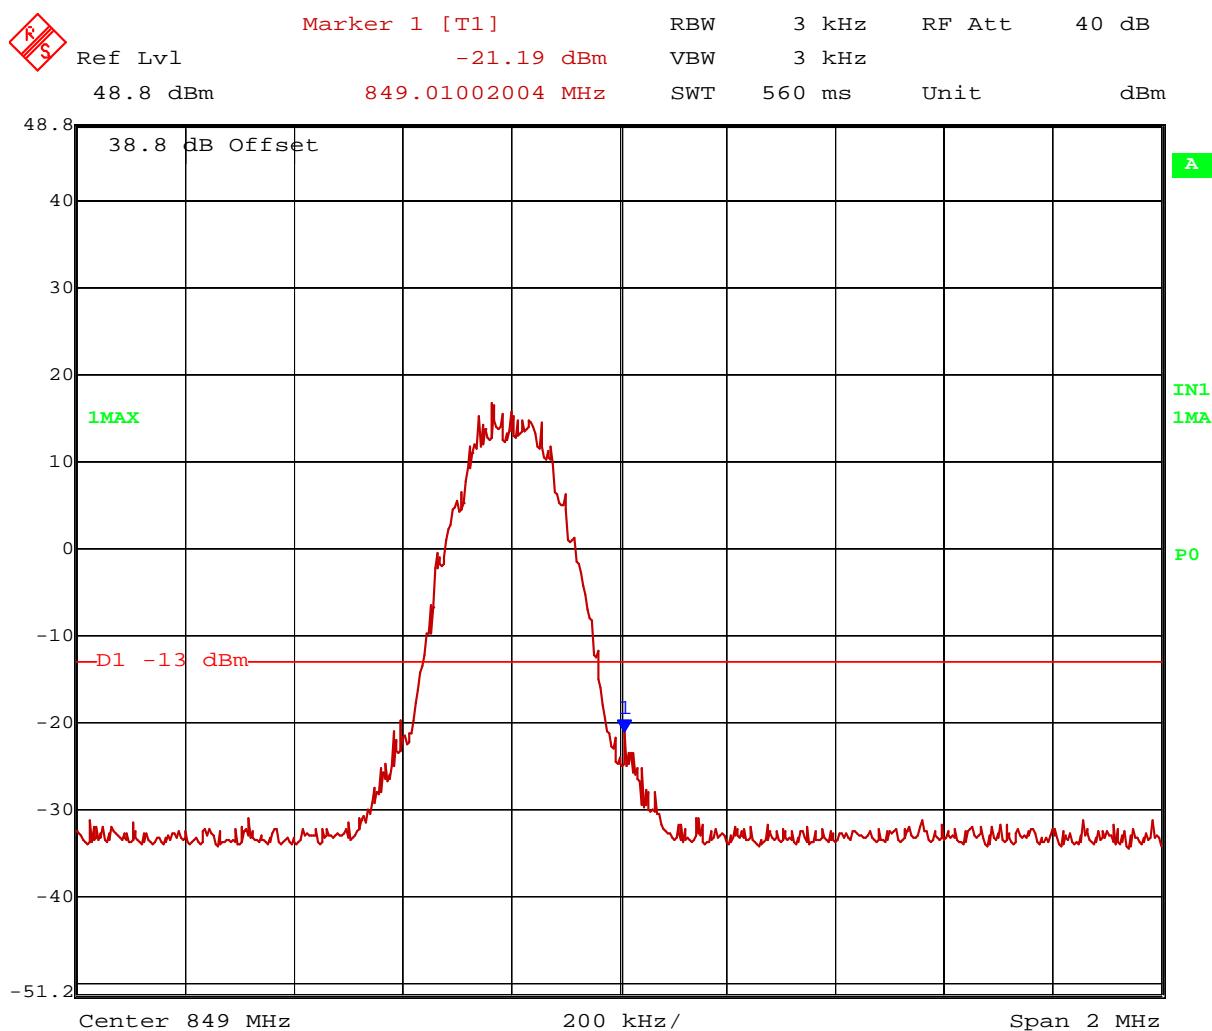

Date: 9.FEB.2004 13:37:26


Figure 6 Upper bandedge, channel 251

10 SPURIOUS RADIATED EMISSION

EUT	03392		
Accessories	03393, 03394		
Temp, Humidity, Air Pressure	20 °C	45 RH%	1026 mbar
Date of measurement	12.2.2004		
FCC rule part	§22.917 (e), §2.1053		
RSS-132 section	4.5		
Measured by	Jari Jantunen		
Result	PASS		

10.1 Test setup

A set of LP/HP/BS filters was used to prevent overloading the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where the measurement devices were controlled by a computer.

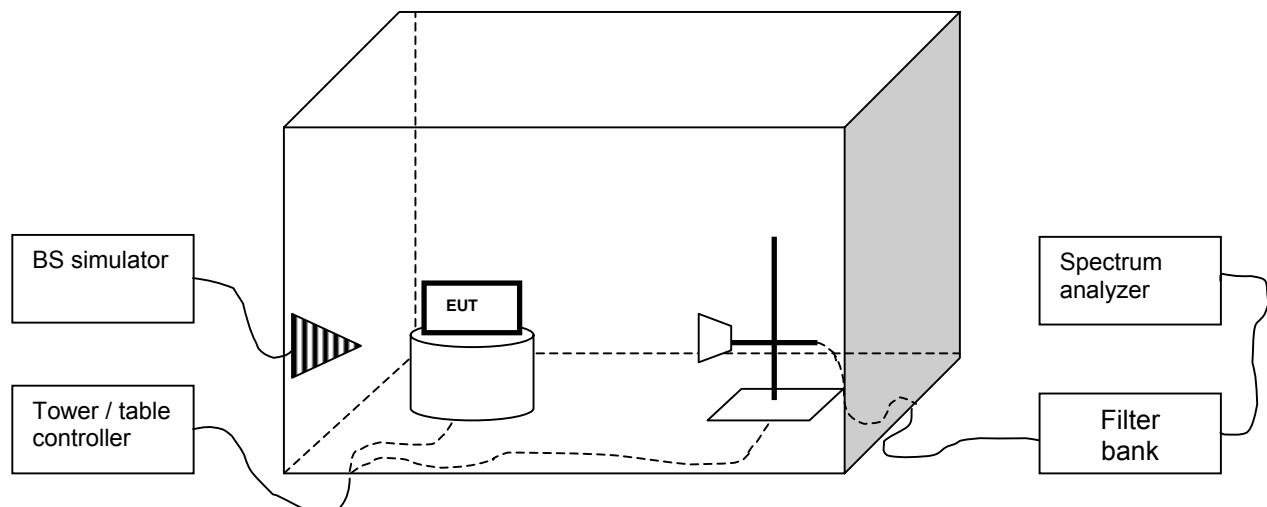

10.2 Test method

- The emissions were searched and maximized by moving the turn table and measuring antenna and manipulating the EUT.
- All suspicious frequencies with emission levels were recorded.
- The EUT was replaced with a substituting antenna.
- For each frequency recorded, the substituting antenna was fed with the power (from signal generator) giving the same reading as in (b). These power levels were reported.

10.3 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation. GMSK modulation
EUT channel	190
EUT TX power level	4 (33dBm)

10.4 Limit

Frequency [MHz]	Level [dBm]
30 – 8500	-13

10.5 Results

The formula below was used to calculate the EIRP of the spurious emissions. If there were no emissions closer than 20dB below the limit line, then the emission levels were measured at the transmitter's harmonics.

$$P_{Emission[dBm]} = P_{SubstTX[dBm]} - L_{Cable[dB]} + G_{Antenna[dBd]}$$

where the variables are as follows:

$P_{Measured}$ [dBm]	Measured emission level (from step b in 10.2)
P_{Subst_TX} [dBm]	Signal generator power (from step d in 10.2) fed to the substituting antenna
L_{Cable} [dB]	Loss of the cable between antenna and signal generator (from step d in 10.2)
$G_{Antenna}$ [dBd]	Gain of the substitutive antenna over dipole (dBi – 2.15dB)

Table 7 Emission levels, channel 190

Frequency [MHz]	$P_{Measured}$ [dBm]	P_{Subst_TX} [dBm]	L_{Cable} [dB]	$G_{Antenna}$ [dBd]	$P_{Emission}$ [dBm]
1673.20	-50.03	-47.90	6.02	6.11	-47.81
2509.80	-58.45	-41.30	5.64	7.05	-39.89
3346.40	-57.42	-44.20	7.18	6.62	-44.76
4230.10	-58.67	-43.20	8.10	7.66	-43.64

10.6 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation. 8PSK modulation (EDGE)
EUT channel	190
EUT TX power level	4 (33dBm)

10.7 Limit

Frequency [MHz]	Level [dBm]
30 – 8500	-13

10.8 Results

The formula below was used to calculate the EIRP of the spurious emissions. If there were no emissions closer than 20dB below the limit line, then the emission levels were measured at the transmitter's harmonics.

$$P_{Emission[dBm]} = P_{SubstTX[dBm]} - L_{Cable[dB]} + G_{Antenna[dBd]}$$

where the variables are as follows:

$P_{Measured}$ [dBm]	Measured emission level (from step b in 10.2)
P_{Subst_TX} [dBm]	Signal generator power (from step d in 10.2) fed to the substituting antenna
L_{Cable} [dB]	Loss of the cable between antenna and signal generator (from step d in 10.2)
$G_{Antenna}$ [dBd]	Gain of the substitutive antenna over dipole (dBi – 2.15dB)

Table 8 Emission levels, channel 190


Frequency [MHz]	$P_{Measured}$ [dBm]	P_{Subst_TX} [dBm]	L_{Cable} [dB]	$G_{Antenna}$ [dBd]	$P_{Emission}$ [dBm]
1673.20	-55.72	-54.70	6.02	6.11	-54.61
3346.40	-60.84	-47.90	7.18	6.62	-48.46
3372.50	-62.29	-48.10	7.07	6.80	-48.47
3521.00	-61.19	-49.20	7.39	7.09	-49.50

11 FREQUENCY STABILITY, TEMPERATURE VARIATION

EUT	3392		
Accessories	3393, 3343		
Temp, Humidity, Air Pressure	20°C	55RH%	1008mbar
Date of measurement	10-11.2.2004		
FCC rule part	§2.1055 (a)(1)(b)		
RSS-132 section	6.3		
Measured by	Jan-Erik Lilja		
Result	PASS		

11.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

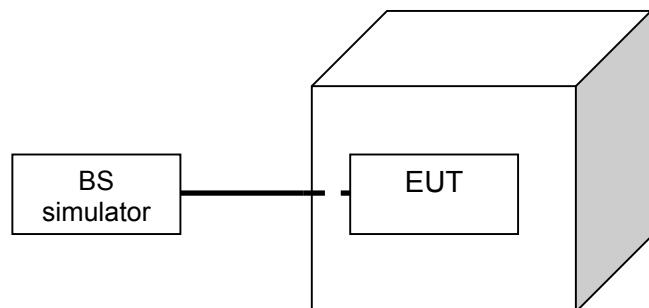

11.2 Limit

Frequency deviation [ppm]

± 2.5

11.3 Test method

- a) The climate chamber temperature was set to the minimum value and the temperature was allowed to stabilize.
- b) The EUT was placed in the chamber
- c) The EUT was set in idle mode for 45 minutes.
- d) The EUT was set to transmit.
- e) The transmit frequency error was measured immediately
- f) The steps c - e were repeated for each temperature

11.4 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation, GMSK modulation
EUT channel	190
EUT TX power level	4 (33dBm)

11.5 Results

Table 9 Frequency deviation, temperature variation

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
-30	*)	*)
-20	*)	*)
-10	19	0.0227
0	22	0.0263
10	24	0.0287
20	19	0.0227
30	22	0.0263
40	19	0.0227
50	20	0.0239

Note: *) Phone did not work at this temperature

12 FREQUENCY STABILITY, VOLTAGE VARIATION

EUT	3392		
Accessories	3393, 3343		
Temp, Humidity, Air Pressure	20 °C	45RH%	1026mbar
Date of measurement	12.2.2004		
FCC rule part	§2.1055 (d)(1)(2)		
RSS-132 section	6.3		
Measured by	Jan-Erik Lilja		
Result	PASS		

12.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.



12.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 audio modulation, GMSK modulation
EUT channel	190
EUT TX power level	4 (33dBm)

12.3 Limit

Frequency deviation [ppm]
± 2.5

12.4 Test method

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

12.5 Results

Table 16. Frequency deviation, voltage variation

Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]
Nominal	3.9	21	0.0251
Battery cut-off point	3.1	21	0.0251

13 TEST EQUIPMENT

Each test equipment is calibrated once a year.

13.1 Conducted measurements

Equipment	Manufacturer	Model
EMI receiver	Rohde & Schwarz	FSU26
Radio communication tester	Rohde & Schwarz	CMU-200
Attenuator 10 dB	Huber+Suhner AG	6251.17.A
Power splitter	Hewlett-Packard	11667A
Temperature chamber	Vötsch	VT4002
DC power supply	Hewlett&Packard	6632A
Multimeter	Hewlett&Packard	34401A

13.2 Radiated measurements

Equipment	Manufacturer	Model
3m semi-anechoic chamber	TDK	
EMI receiver	Rohde & Schwarz	ESI 40
Preamplifier	Hewlett-Packard	8447F
Preamplifier	Hewlett-Packard	8449B
Biconilog antenna	EMCO	3142
Double ridged waveguide antenna	EMCO	3115
Double ridged waveguide antenna	EMCO	3115
Horn antenna	EMCO	3116
Reference dipole set	Schwarzbeck	UHAP/VHAP
Fixed dipole	EMCO	3125-870
Communication antenna	EMC Automation	LPA-8020
Radio communication tester	Rohde & Schwarz	CMU-200
Signal generator	Hewlett-Packard	83640L
Step attenuator 110dB	Hewlett-Packard	8496A
Power splitter	Hewlett-Packard	11667A
High pass filter	Trilithic	WHK2010-10SS
Low pass filter	Trilithic	WLK1750-10SS
Tunable notch filter	Wainwright	WRCD836-0.2/50-6SS
Antenna/turntable controller	Deisel	HD-100
Antenna mast	Deisel	MA240
Turntable	Deisel	DS412

14 TEST SETUP PHOTOGRAPHS

See "NHL-12 Test setup photographs.doc".