

TEST REPORT

Report No. : **KS2212S5873E**

FCC ID..... : **2A7H7-SONIC-1200**

Applicant..... : **G-Youth TECHNOLOGIES (Shenzhen) CO.LTD**

Address..... : 6th Floor, Block A, Haina Baichuan Headquarters Building, No. 6
Baoping Road, Xing'an Street, Bao'an District, Shenzhen

Manufacturer..... : **G-Youth TECHNOLOGIES (Shenzhen) CO.LTD**

Address..... : 6th Floor, Block A, Haina Baichuan Headquarters Building, No. 6
Baoping Road, Xing'an Street, Bao'an District, Shenzhen

Product Name..... : **Portable Power Station Sonic**

Trade Mark..... : **EGRETECH**

Model/Type reference..... : **Sonic 1200W**

Standard..... : **FCC Rules and Regulations Part 15 Subpart C (Section 15.209),
ANSI C63.10: 2013**


Date of receipt of test sample..... : **December 21, 2022**

Date of testing..... : **December 21, 2022 to February 17, 2023**


Date of issue..... : **February 17, 2023**

Test Result..... : **Pass**

Prepared by:
(Printed Name + Signature) **Pai Zheng**



Approved by:
(Printed Name + Signature) **Sky Dong**



Testing Laboratory Name..... : **KSIGN(Guangdong) Testing Co., Ltd.**

Address..... : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu
Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen,
Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

Contents

1 TEST SUMMARY	3
1.1 Test Standards	3
1.2 Report Version	3
1.3 Summary of measurement results	4
1.4 Statement of the measurement uncertainty	4
1.5 Modifications	4
1.6 Address of the test laboratory	5
1.7 Environmental conditions	5
2 GENERAL INFORMATION	6
2.1 Product Description	6
2.2 Description of the test mode	7
2.3 Special Accessories	7
2.4 Equipments Used during the Test	8
3.TEST CONDITIONS AND RESULTS	9
3.1 AC Power Conducted Emission	9
3.2 Radiated Emission	12
3.3 Antenna Requirement	20
4. TEST SETUP PHOTOS OF THE EUT	21
5. PHOTOS OF THE EUT	23

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

[FCC Rules and Regulations Part 15 Subpart C \(Section 15.207\)](#): Conducted limits.

[FCC Rules and Regulations Part 15 Subpart C \(Section 15.209\)](#): Radiated emission limits; general requirements.

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2 Report Version

Revised No.	Date of issue	Description
01	February 17, 2023	Original

1.3 Summary of measurement results

FCC Rules	Description of test	Result
§ 15.207	Conducted emissions test	Pass
§ 15.209	Radiated emission test	Pass
§ 15.203	Antenna requirement	Compliant

Note:

1. Pass: The EUT complies with the essential requirements in the standard

Fail: The EUT does not comply with the essential requirements in the standard

All indications of Pass/Fail in this report are opinions expressed by KSIGN(Guangdong) Testing Co., Ltd. based on interpretations and/or observations of test results Measurement Uncertainties were not taken into account and are published for informational purposes only.

2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.

1.4 Statement of the measurement uncertainty

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Radiated Emission	9~30MHz	2.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.5 Modifications

No modifications were implemented to meet testing criteria.

1.6 Address of the test laboratory

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED#: 25693 CAB identifier.: CN0096

KSIGN(Guangdong) Testing Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

FCC-Registration No.: 294912 Designation Number: CN1328

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

1.7 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

AC Power Conducted Emission:


Temperature:	25 ° C
Humidity:	46 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

2 GENERAL INFORMATION

2.1 Product Description

Product Name:	Portable Power Station Sonic
Trade Mark:	
Model/Type reference:	Sonic 1200W
Model Different:	N/A
Hardware version:	V1.0
Software version:	V1.0
Test samples ID:	KS2212S5873E-1# (Engineer sample), KS2212S5873E-2# (Normal sample)
Power supply(Input):	Input: AC 100-120V~60Hz, rated 1000W
Wireless Charging(Output):	5W, 15W (Max)
Operation frequency:	115KHz - 205KHz
Modulation type:	ASK
Antenna type:	Loop coil antenna
Antenna Gain:	0 dBi
Note: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.	

2.2 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes:		
Mode 1	Wireless charging mode (5W)	Recorded
Mode 2	Wireless charging mode (15W)	Recorded
Mode 3	Standby	Pre-tested
Note: All test modes were pre-tested, The Mode 1 was the worst case and only the data of the worst case record in this report.		

2.3 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
AC power cord	/	/	/	FCC	laboratory
Wireless charging load	/	EESON	5W, 15W	FCC	laboratory

2.4 Equipments Used during the Test

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
2	Vector Signal Generator	Agilent	N5182A	MY50142520	03/04/2023
3	Analog Signal Generator	HP	83752A	3344A00337	03/04/2023
4	Power Sensor	Agilent	E9304A	MY50390009	03/04/2023
5	Power Sensor	Agilent	E9300A	MY41498315	03/04/2023
6	Wideband Radio Communication Tester	R&S	CMW500	157282	03/04/2023
7	Climate Chamber	Angul	AGNH80L	1903042120	03/04/2023
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	03/04/2023
9	RF Control Unit	Tonscend	JS0806-2	/	03/04/2023

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	EMI Test Receiver	R&S	ESR	102525	03/04/2023
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	03/04/2023
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	03/04/2023
4	Spectrum Analyzer	HP	8593E	3831U02087	03/04/2023
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	12/04/2023
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	03/04/2023
7	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
8	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	03/29/2023
9	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	03/04/2023
10	Pre-Amplifier	EMCI	EMC051835SE	980662	03/04/2023

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	LISN	R&S	ENV432	1326.6105.02	03/04/2023
2	EMI Test Receiver	R&S	ESR	102524	03/04/2023
3	Manual RF Switch	JS TOYO	/	MSW-01/002	03/04/2023

Note: 1)The Cal.Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

TRF No. FCC Part 15C_R2

8

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web:

www.gdkesign.com

3.TEST CONDITIONS AND RESULTS

3.1 AC Power Conducted Emission

TEST CONFIGURATION

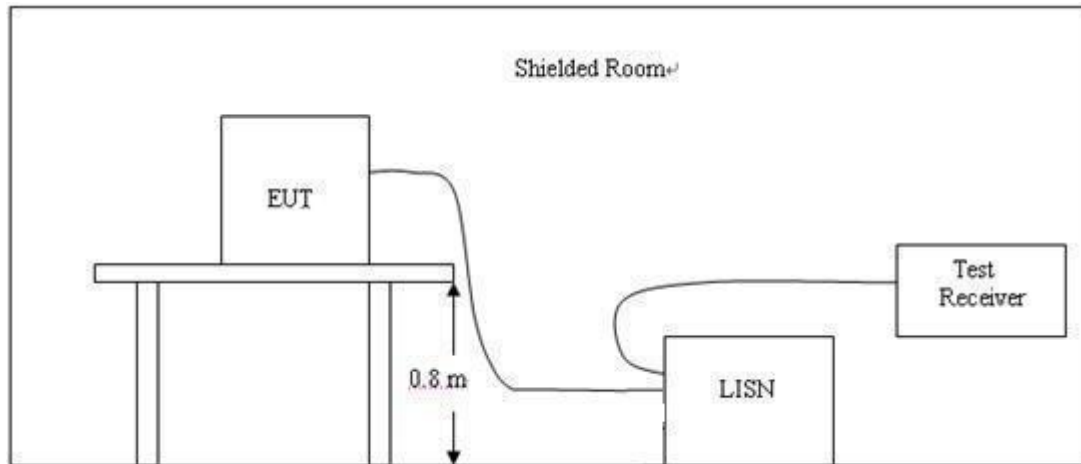

TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

- Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

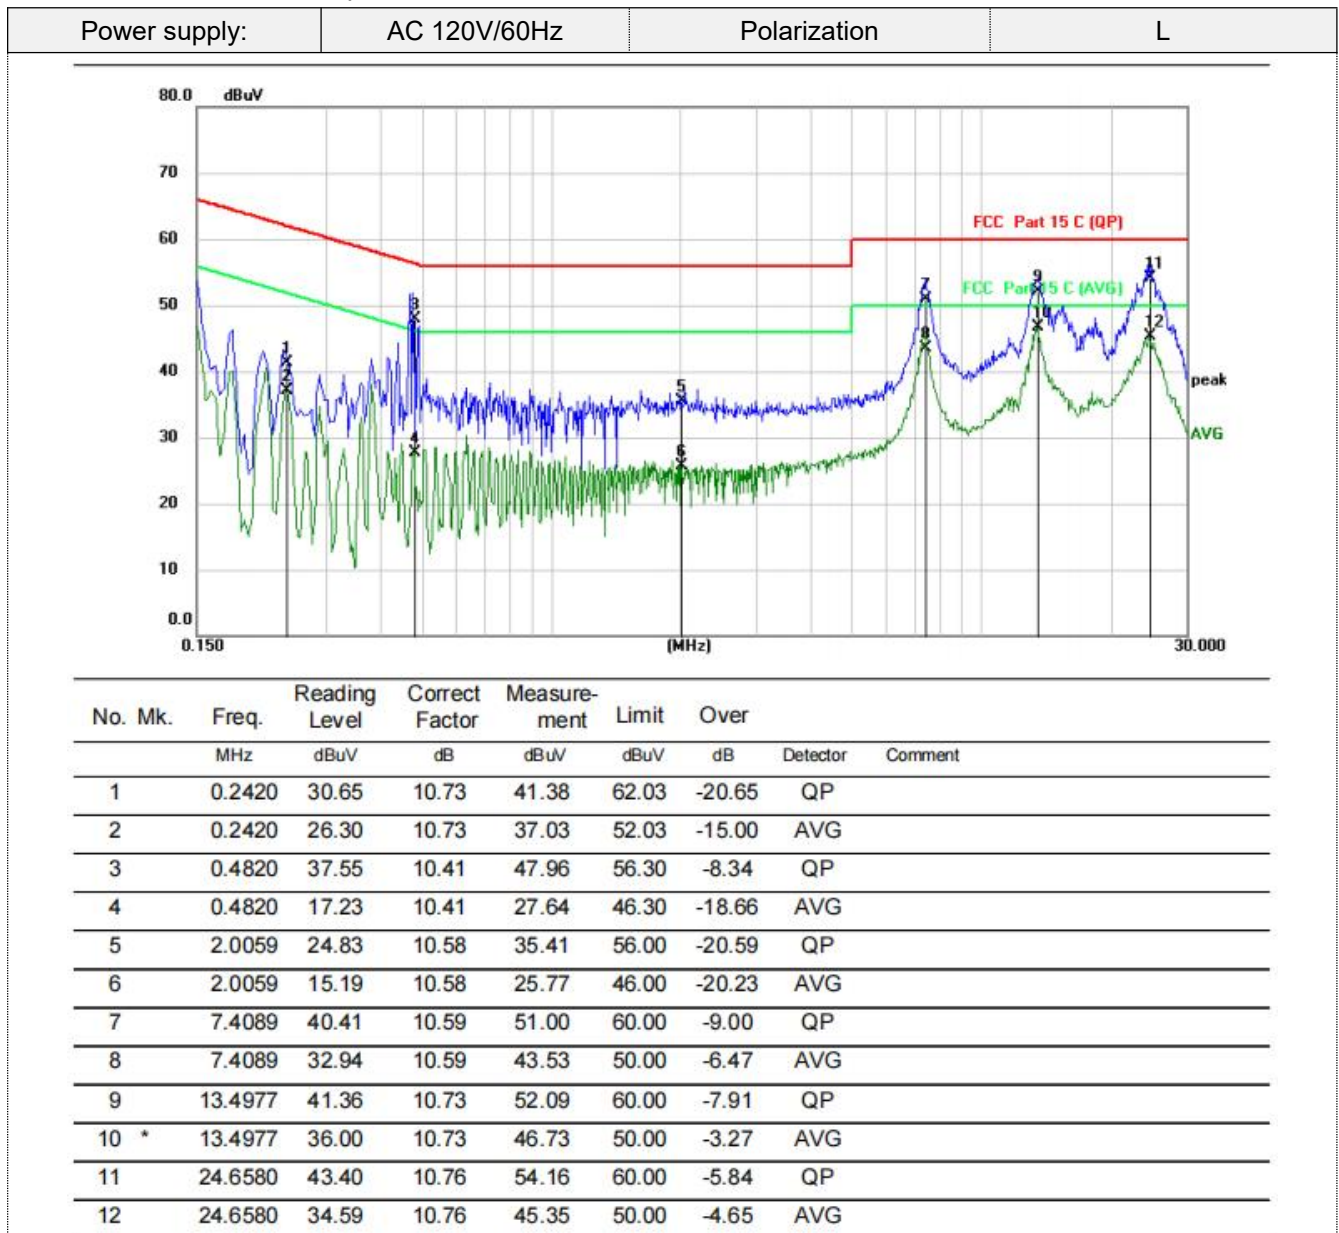

Note: Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)


4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Power supply:

AC 120V/60Hz

Polarization

N

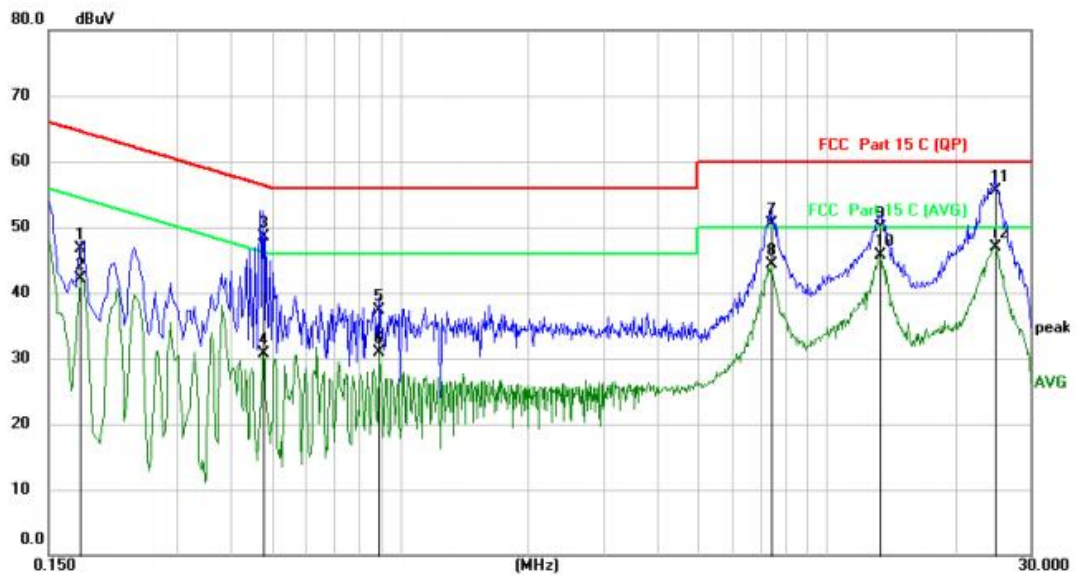

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBμV	dB	dBμV	dBμV	dB	Detector	Comment
1	0.1780	36.05	10.74	46.79	64.58	-17.79	QP	
2	0.1780	31.30	10.74	42.04	54.58	-12.54	AVG	
3	0.4780	38.02	10.52	48.54	56.37	-7.83	QP	
4	0.4780	20.13	10.52	30.65	46.37	-15.72	AVG	
5	0.8940	26.83	10.46	37.29	56.00	-18.71	QP	
6	0.8940	20.36	10.46	30.82	46.00	-15.18	AVG	
7	7.4100	40.00	10.57	50.57	60.00	-9.43	QP	
8	7.4100	33.75	10.57	44.32	50.00	-5.68	AVG	
9	13.2900	39.14	10.71	49.85	60.00	-10.15	QP	
10	13.2900	35.09	10.71	45.80	50.00	-4.20	AVG	
11	24.7779	44.54	10.93	55.47	60.00	-4.53	QP	
12 *	24.7779	36.04	10.93	46.97	50.00	-3.03	AVG	

Note: Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

3.2 Radiated Emission

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION

1. Radiated Emission Test Set-Up, Frequency Below 30MHz

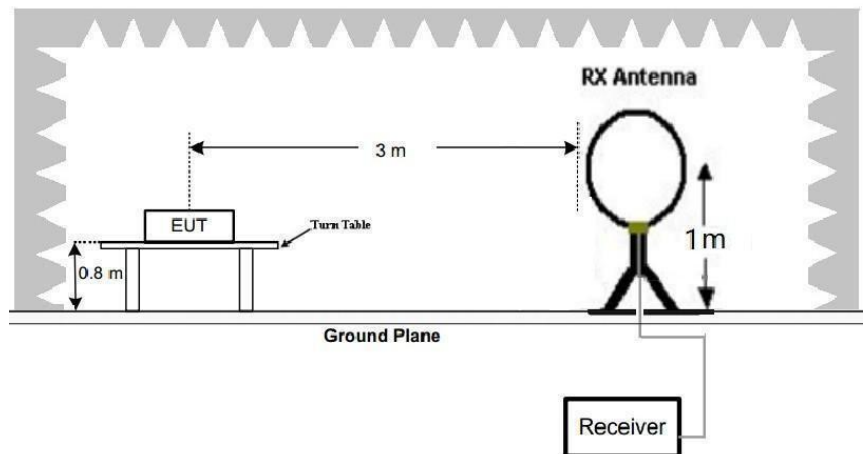

2. Radiated Emission Test Set-Up, Frequency below 1000MHz

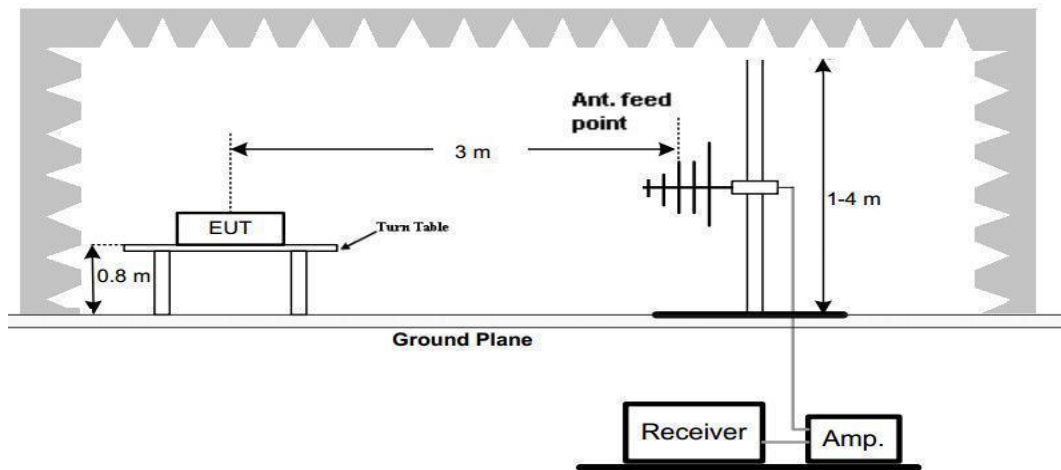

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 1000MHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3


- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP

TEST RESULTS

For 9 KHz-30MHz

Face

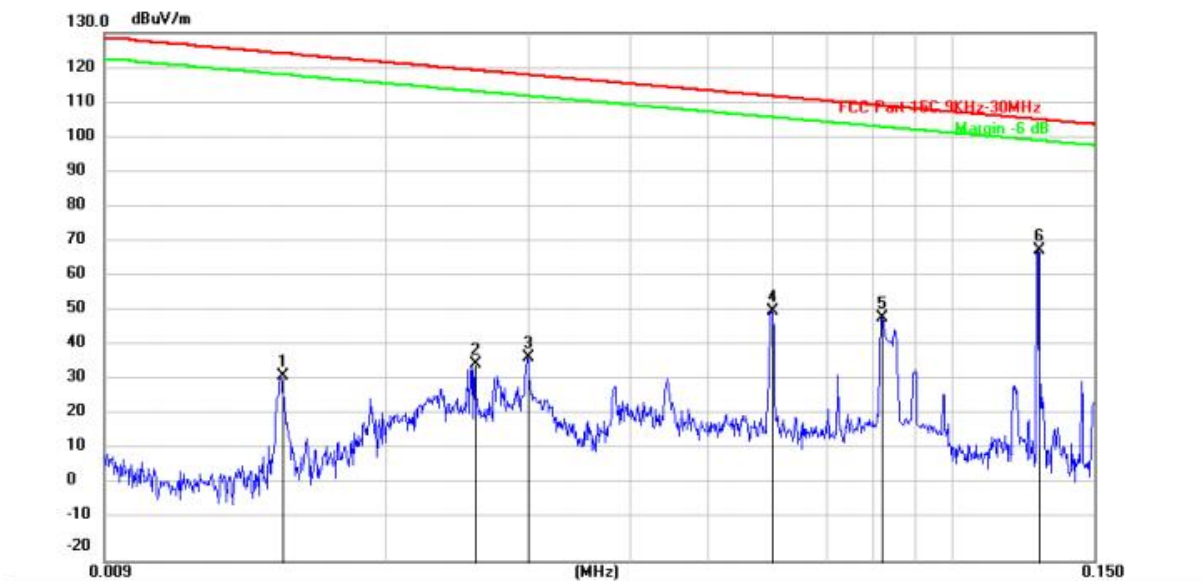


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Detector
1		0.0149	41.69	-9.08	32.61	124.14	-91.53	peak
2		0.0258	44.99	-9.02	35.97	119.37	-83.40	peak
3		0.0300	47.04	-9.00	38.04	118.06	-80.02	peak
4		0.0600	60.35	-9.10	51.25	112.04	-60.79	peak
5		0.0821	58.34	-9.09	49.25	109.32	-60.07	peak
6	*	0.1278	77.91	-9.63	68.28	105.47	-37.19	peak

Remark:

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor


Face

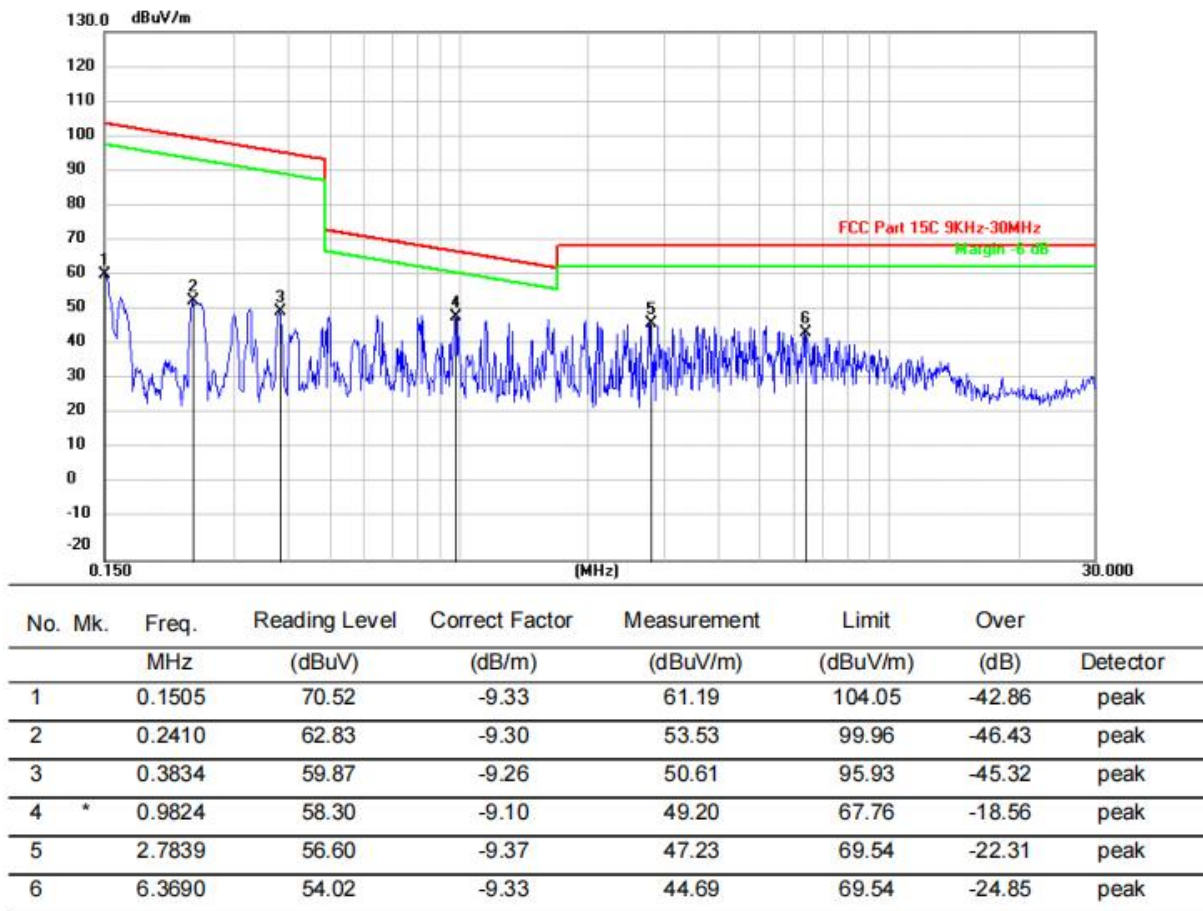

Remark:

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor


Side

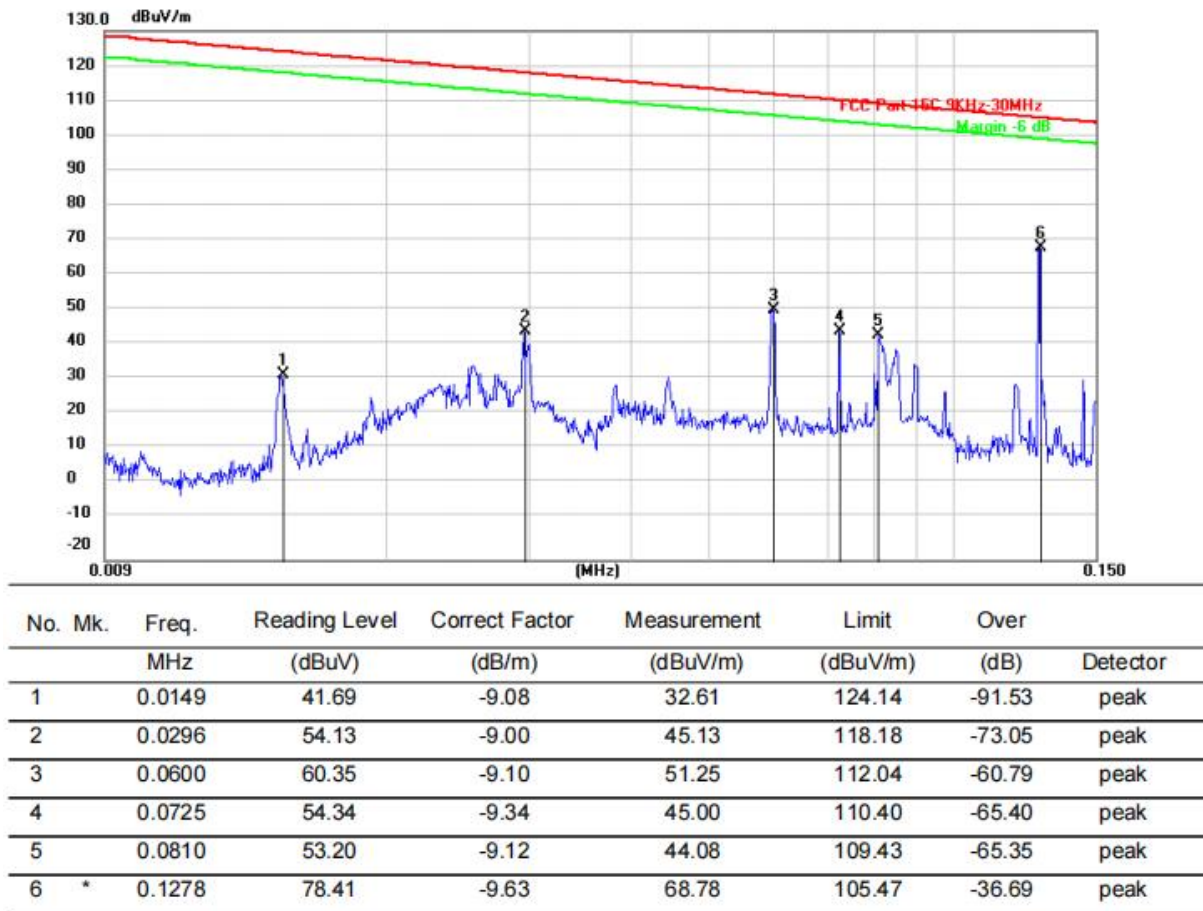

Remark:

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor

Side

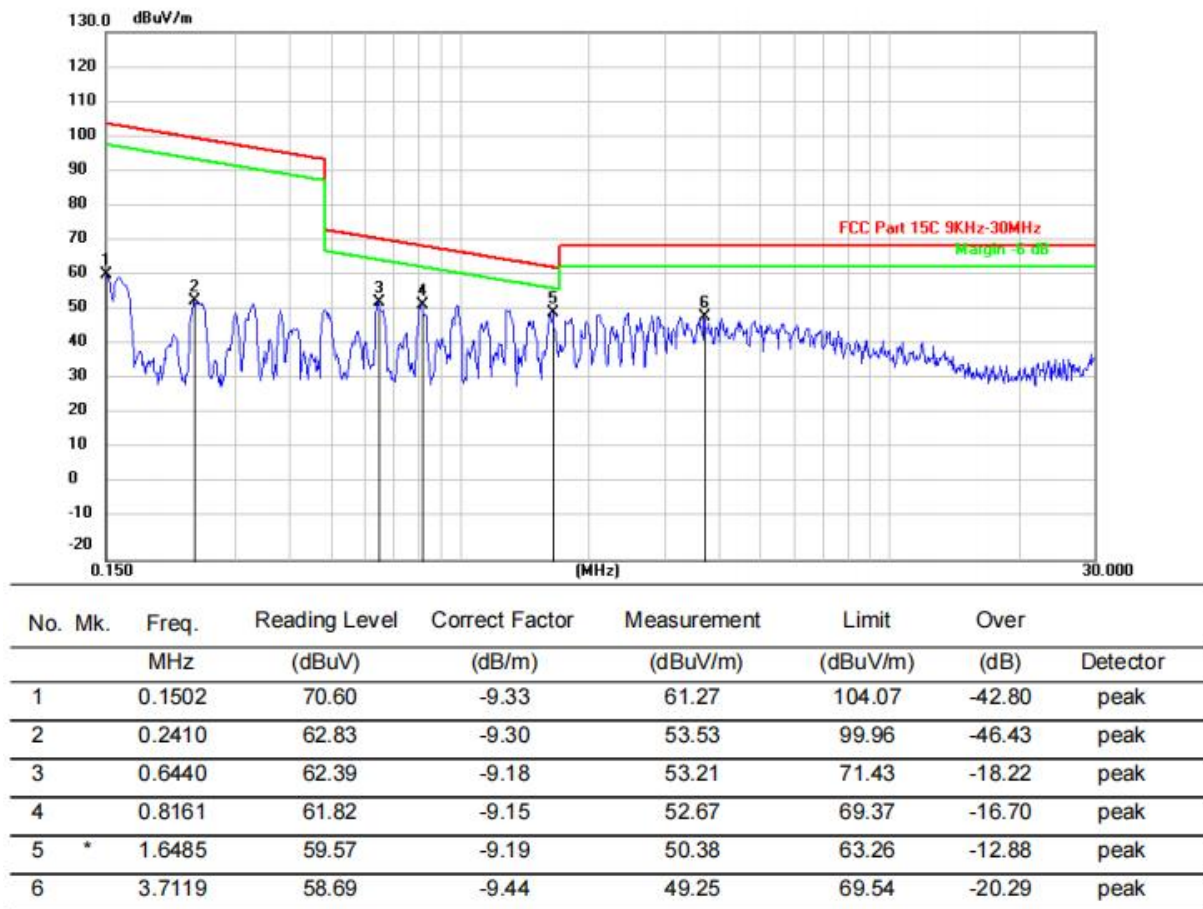


Remark:

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor

For 30MHz-1GHz

Horizontal

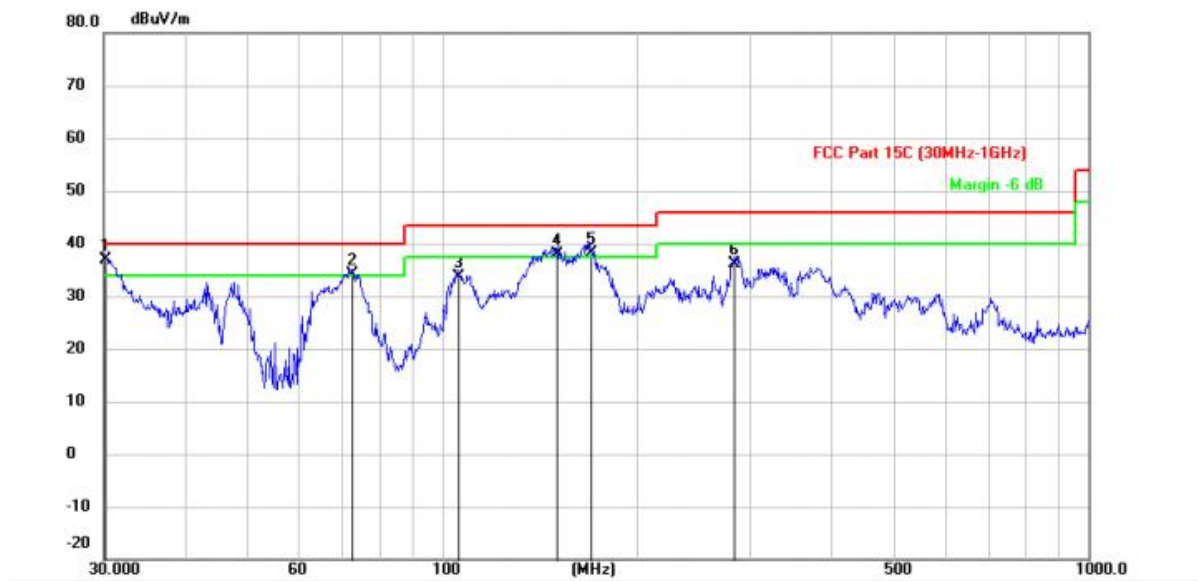


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	*	30.1793	55.88	-19.01	36.87	40.00	-3.13	QP
2	!	72.7955	54.02	-20.00	34.02	40.00	-5.98	QP
3		105.7527	51.61	-18.07	33.54	43.50	-9.96	QP
4	!	150.8018	59.27	-21.38	37.89	43.50	-5.61	QP
5	!	169.6585	58.65	-20.53	38.12	43.50	-5.38	QP
6		283.6806	51.29	-15.05	36.24	46.00	-9.76	QP

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

Vertical

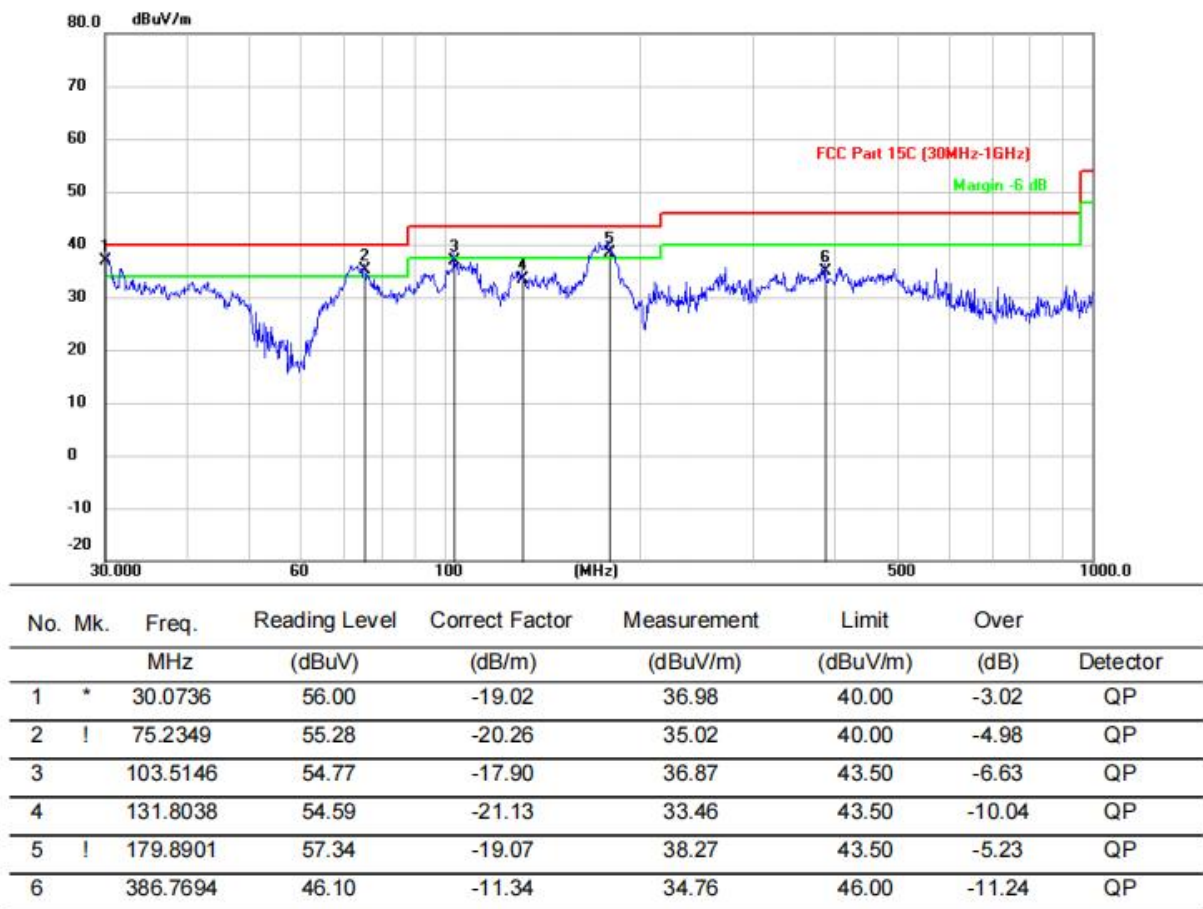

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

3.3 Antenna Requirement

Standard Applicable

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Information

The antenna used in this product is a Coil Antenna.

4. Test Setup Photos of the EUT


Radiated Measurement (Below 30MHz)



Radiated Measurement (Above 30MHz)




Conducted Emission

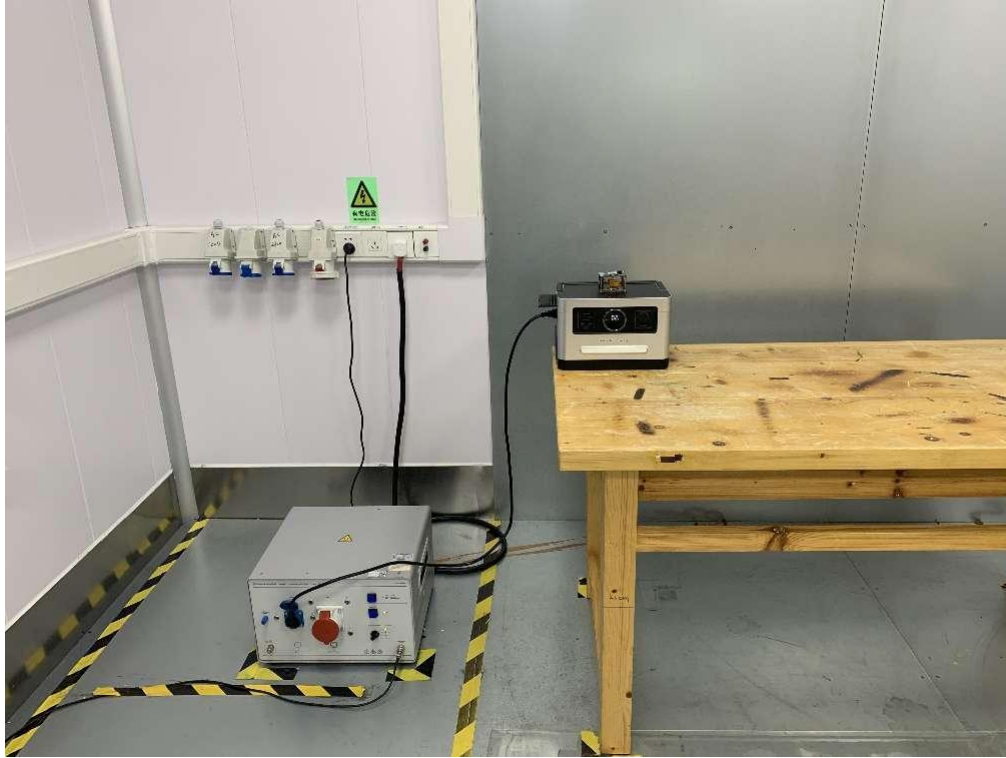

5. PHOTOS OF THE EUT


External





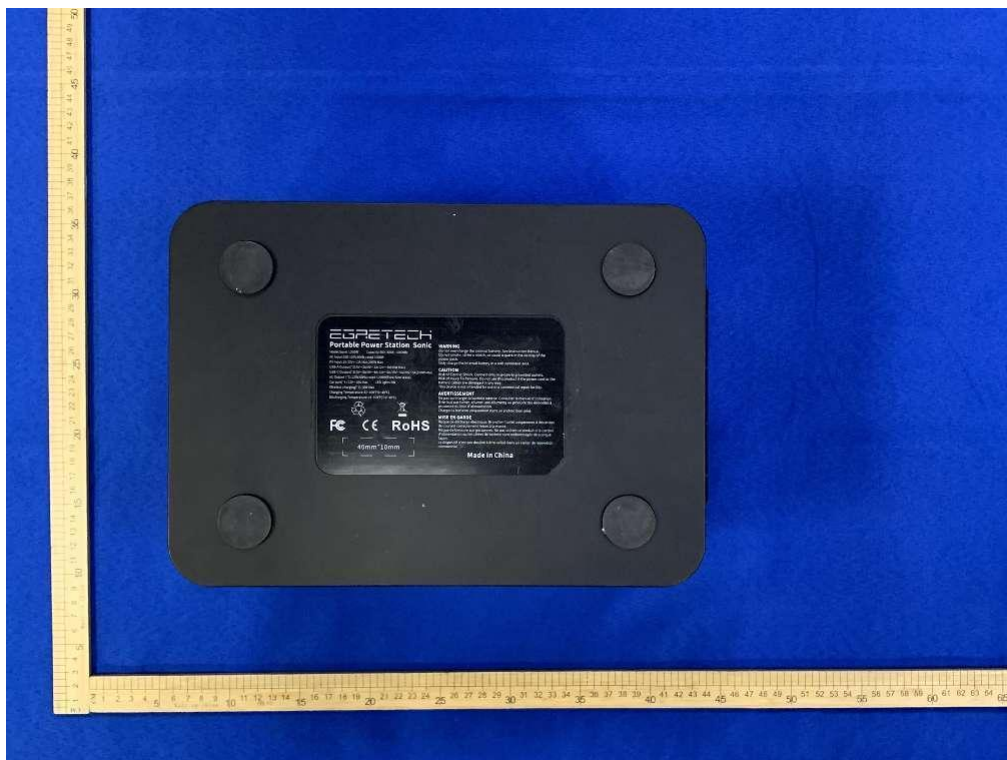







Internal


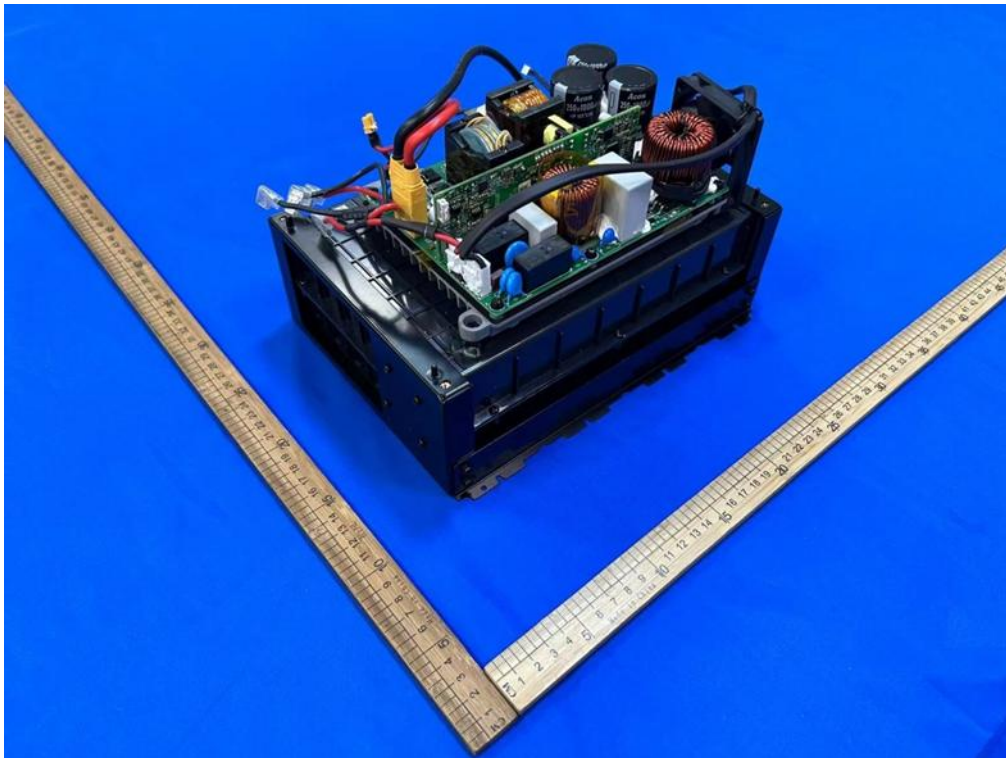


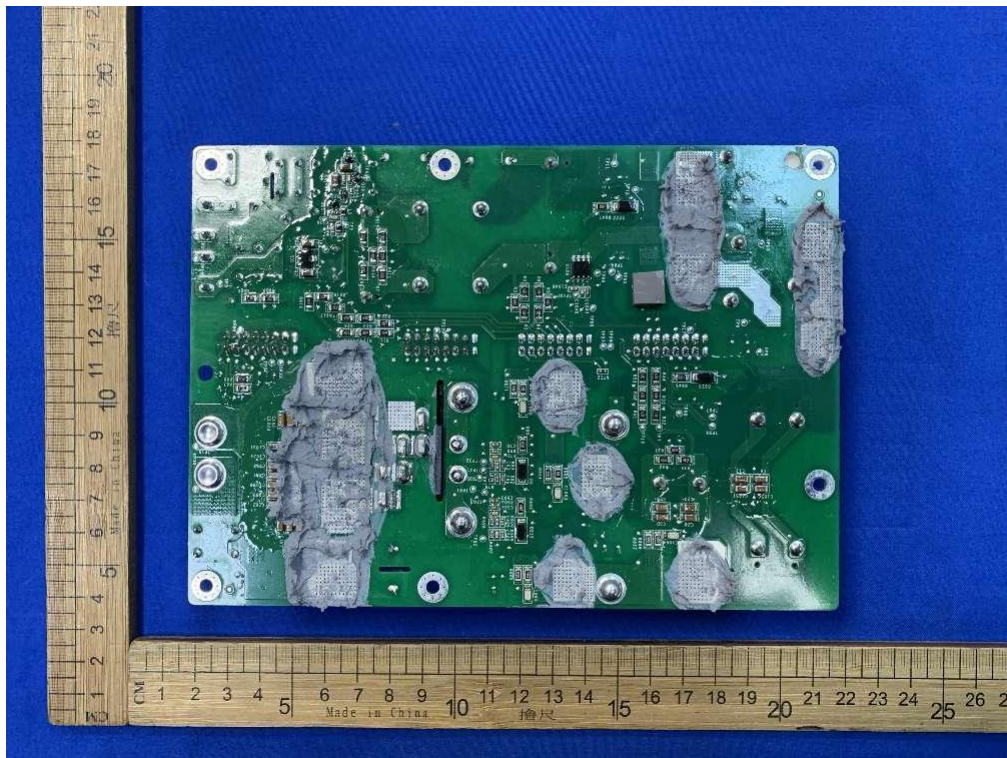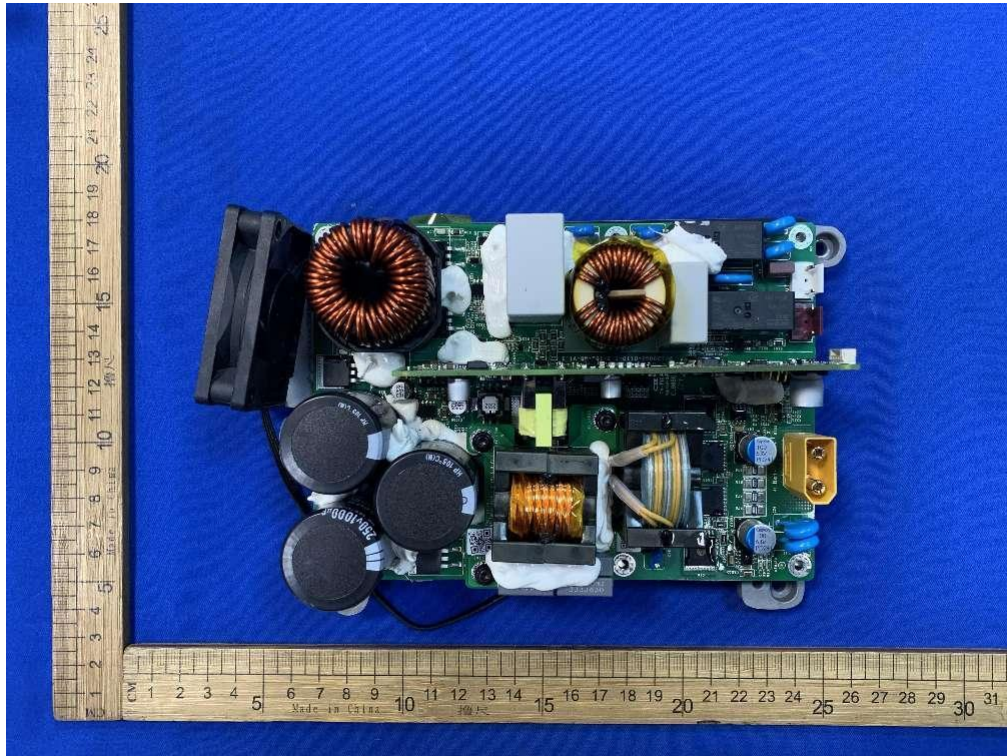



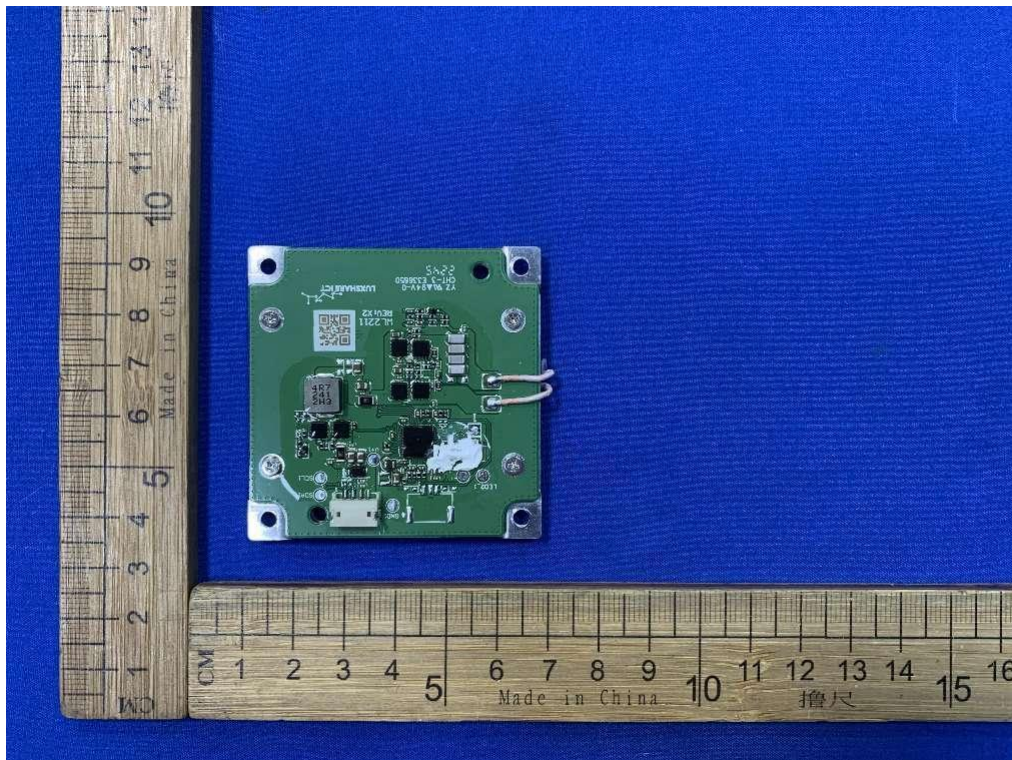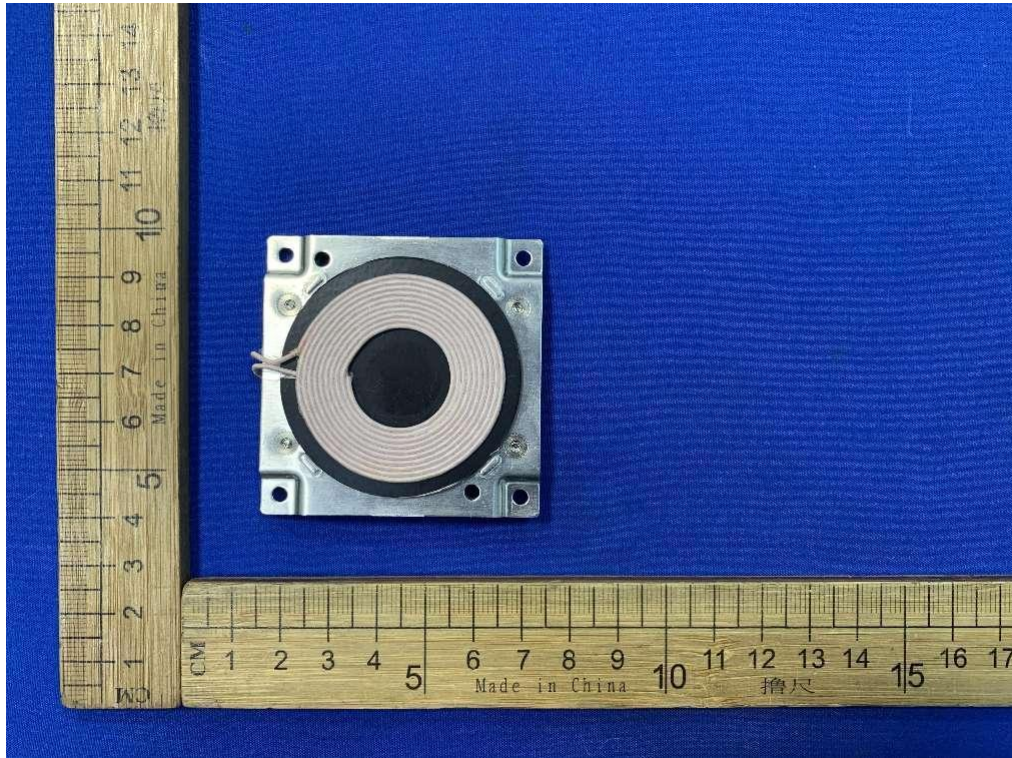

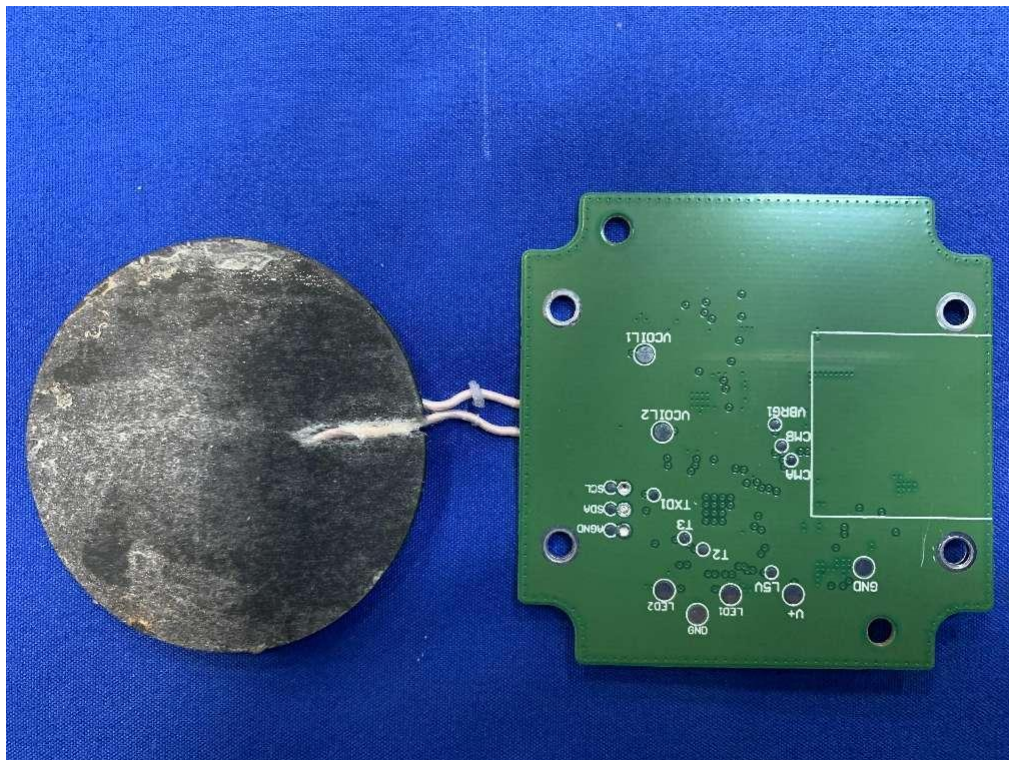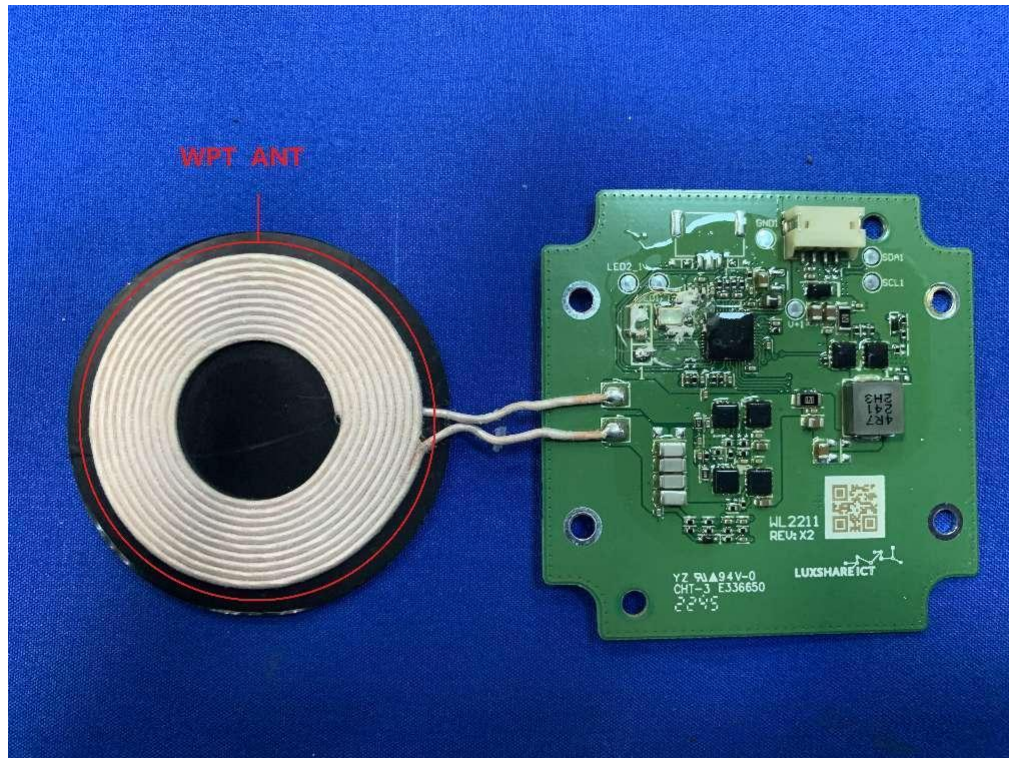

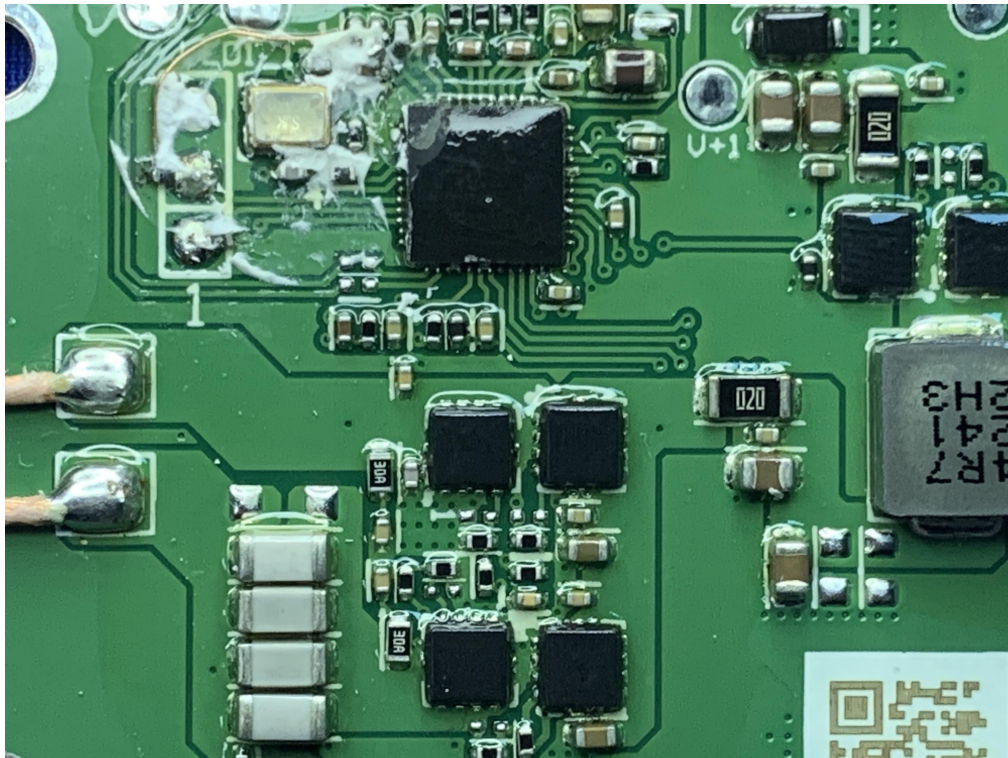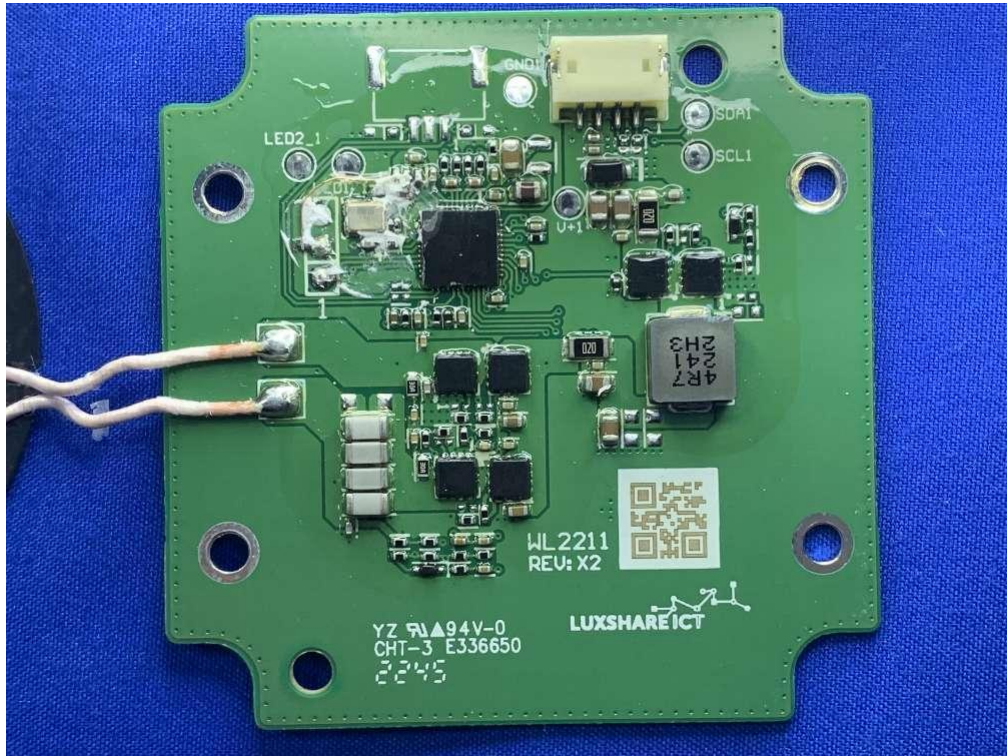

***** End of Report *****