


FCC SAR Test Report

APPLICANT : Getac Technology Corporation.
EQUIPMENT : Wireless module
BRAND NAME : Getac
MODEL NAME : EM7355
FCC ID : QYLEM7355R
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

The product was installed into Tablet (Brand Name: Getac, Model Name: RX10) during test.

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4

2. Administration Data 5

3. Guidance Standard 5

4. Equipment Under Test (EUT) 6

 4.1 General Information 6

 4.2 Maximum Tune-up Limit..... 7

 4.3 General LTE SAR Test and Reporting Considerations10

5. RF Exposure Limits.....14

 5.1 Uncontrolled Environment.....14

 5.2 Controlled Environment.....14

6. Specific Absorption Rate (SAR).....15

 6.1 Introduction15

 6.2 SAR Definition.....15

7. System Description and Setup16

8. Measurement Procedures17

 8.1 Spatial Peak SAR Evaluation.....17

 8.2 Power Reference Measurement.....18

 8.3 Area Scan18

 8.4 Zoom Scan.....19

 8.5 Volume Scan Procedures.....19

 8.6 Power Drift Monitoring.....19

9. Test Equipment List20

10. System Verification21

 10.1 Tissue Verification21

 10.2 System Performance Check Results.....22

11. RF Exposure Positions22

 11.1 SAR Testing for Tablet.....22

12. Conducted RF Output Power (Unit: dBm).....23

13. Antenna Location40

14. SAR Test Results42

 14.1 Body SAR43

 14.2 Repeated SAR Measurement45

15. Simultaneous Transmission Analysis.....46

 15.1 Body Exposure Conditions.....47

 15.2 SPLSR Evaluation and Analysis.....50

16. Uncertainty Assessment55

17. References.....57

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA570164-01	Rev. 01	Initial issue of report	Aug. 24, 2015



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Getac Technology Corporation., Wireless module, EM7355**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body 1g SAR (W/kg)	Simultaneous Transmission 1g SAR (W/kg)
PCB	GSM850	1.05	1.59
	GSM1900	0.98	
	WCDMA Band V	1.15	
	WCDMA Band IV	0.94	
	WCDMA Band II	1.10	
	CDMA 2000 BC10	1.19	
	CDMA 2000 BC0	1.19	
	CDMA 2000 BC1	1.00	
	LTE Band 17	0.78	
	LTE Band 13	1.00	
	LTE Band 5	1.17	
	LTE Band 4	0.86	
	LTE Band 25	1.12	
Date of Testing:		2015/07/17~2015/07/21	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.



2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Getac Technology Corporation.
Address	5F., Building A, No. 209, Sec.1, Nangang Rd.,Nangang Dist., Taipei City 11568, Taiwan, R.O.C.

Manufacturer	
Company Name	Sierra Wireless, Inc.
Address	13811, Wireless Way, Richmond, British Columbia

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- April 2015 TCB workshop notes (Overlapping LTE Bands)



4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Wireless module
Brand Name	Getac
Model Name	EM7355
FCC ID	QYLEM7355R
IMEI Code	356196051008239
S / N	RF5XXR0310
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 826.5 MHz ~ 846.5 MHz LTE Band 4: 1712.5 MHz ~ 1752.5 MHz LTE Band 2: 1852.5 MHz ~ 1907.5 MHz LTE Band 25: 1852.5 MHz ~ 1912.5 MHz
Mode	<ul style="list-style-type: none"> · GPRS/EGPRS · RMC 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) · LTE: QPSK, 16QAM
EUT Stage	Production Unit
Remark:	
<ol style="list-style-type: none"> 1. The WLAN/BT module, Brand Name: Intel, Model Name: 7265NGW, FCC ID: QYL7265NG is also integrated into this host and the WLAN SAR testing results are also used perform transmission simultaneous analysis which can be referred to Sporton SAR Test Report, Report No: FA570164-02. 2. When proximity sensor is enabled that GSM850, WCDMA B5, CDMA BC10 / BC0 / BC1, LTE B13 / B5 power reduction applied to satisfy SAR compliance. 	

Host Information	
Host Name	Tablet
Brand Name	Getac
Model Name	RX10
Integrated Module	Brand Name: Intel Model Name: 7265NGW
Wireless Technology	<ul style="list-style-type: none"> · 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 · Bluetooth v3.0+EDR , Bluetooth v4.0-LE · NFC



4.2 Maximum Tune-up Limit

Mode / Band	Burst Average Power (dBm)		
	GSM 850		GSM 1900
Output Power Status	Full Power Mode	Reduce Power Mode	Full Power Mode
GPRS (GMSK, 1 Tx slot)	33.50	30.50	30.50
GPRS (GMSK, 2 Tx slots)	33.00	28.00	30.00
EDGE (8PSK, 1 Tx slot)	28.00	28.00	27.00
EDGE (8PSK, 2 Tx slots)	27.00	27.00	26.00
EDGE (8PSK, 3 Tx slot)	27.00	24.00	26.00
EDGE (8PSK, 4 Tx slots)	27.00	24.00	26.00

Mode / Band	Average Power (dBm)			
	WCDMA Band V		WCDMA Band II	WCDMA Band IV
Output Power Status	Full Power Mode	Reduce Power Mode	Full Power Mode	Full Power Mode
RMC 12.2Kbps	24.00	22.00	24.00	24.00
HSDPA Subtest-1	24.00	22.00	24.00	24.00
DC-HSDPA Subtest-1	24.00	22.00	24.00	24.00
HSUPA Subtest-5	24.00	22.00	24.00	24.00

Mode / Band	Average Power (dBm)					
	CDMA BC10		CDMA BC0		CDMA BC1	
Output Power Status	Full Power Mode	Reduce Power Mode	Full Power Mode	Reduce Power Mode	Full Power Mode	Reduce Power Mode
1xRTT RC1 SO55	25.00	22.00	25.00	22.00	25.00	24.00
1xRTT RC3 SO55	25.00	22.00	25.00	22.00	25.00	24.00
1xEV-DO Rev 0	25.00	22.00	25.00	22.00	25.00	24.00
1xEV-DO Rev A	25.00	22.00	25.00	22.00	25.00	24.00

LTE Band 17				
Modulation	BW (MHz)	RB size	Full Power Mode	
			MPR	Average Power (dBm)
QPSK	10	≤ 12	0	24.00
QPSK	10	> 12	1	23.00
16QAM	10	≤ 12	1	23.00
16QAM	10	> 12	2	22.00
QPSK	5	≤ 8	0	24.00
QPSK	5	> 8	1	23.00
16QAM	5	≤ 8	1	23.00
16QAM	5	> 8	2	22.00



LTE Band 13						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduce Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	10	≤ 12	0	24.00	0	22.00
QPSK	10	> 12	1	23.00	0	22.00
16QAM	10	≤ 12	1	23.00	0	22.00
16QAM	10	> 12	2	22.00	1	21.00
QPSK	5	≤ 8	0	24.00	0	22.00
QPSK	5	> 8	1	23.00	0	22.00
16QAM	5	≤ 8	1	23.00	0	22.00
16QAM	5	> 8	2	22.00	1	21.00

LTE Band 5						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduce Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	10	≤ 12	0	24.00	0	22.00
QPSK	10	> 12	1	23.00	0	22.00
16QAM	10	≤ 12	1	23.00	0	22.00
16QAM	10	> 12	2	22.00	1	21.00
QPSK	5	≤ 8	0	24.00	0	22.00
QPSK	5	> 8	1	23.00	0	22.00
16QAM	5	≤ 8	1	23.00	0	22.00
16QAM	5	> 8	2	22.00	1	21.00

LTE Band 4				
Modulation	BW (MHz)	RB size	Full Power Mode	
			MPR	Average Power (dBm)
QPSK	20	≤ 18	0	24.00
QPSK	20	> 18	1	23.00
16QAM	20	≤ 18	1	23.00
16QAM	20	> 18	2	22.00
QPSK	15	≤ 16	0	24.00
QPSK	15	> 16	1	23.00
16QAM	15	≤ 16	1	23.00
16QAM	15	> 16	2	22.00
QPSK	10	≤ 12	0	24.00
QPSK	10	> 12	1	23.00
16QAM	10	≤ 12	1	23.00
16QAM	10	> 12	2	22.00
QPSK	5	≤ 8	0	24.00
QPSK	5	> 8	1	23.00
16QAM	5	≤ 8	1	23.00
16QAM	5	> 8	2	22.00



LTE Band 2				
Modulation	BW (MHz)	RB size	Full Power Mode	
			MPR	Average Power (dBm)
QPSK	20	≤ 18	0	24.00
QPSK	20	> 18	1	23.00
16QAM	20	≤ 18	1	23.00
16QAM	20	> 18	2	22.00
QPSK	15	≤ 16	0	24.00
QPSK	15	> 16	1	23.00
16QAM	15	≤ 16	1	23.00
16QAM	15	> 16	2	22.00
QPSK	10	≤ 12	0	24.00
QPSK	10	> 12	1	23.00
16QAM	10	≤ 12	1	23.00
16QAM	10	> 12	2	22.00
QPSK	5	≤ 8	0	24.00
QPSK	5	> 8	1	23.00
16QAM	5	≤ 8	1	23.00
16QAM	5	> 8	2	22.00

LTE Band 25				
Modulation	BW (MHz)	RB size	Full Power Mode	
			MPR	Average Power (dBm)
QPSK	20	≤ 18	0	24.00
QPSK	20	> 18	1	23.00
16QAM	20	≤ 18	1	23.00
16QAM	20	> 18	2	22.00
QPSK	15	≤ 16	0	24.00
QPSK	15	> 16	1	23.00
16QAM	15	≤ 16	1	23.00
16QAM	15	> 16	2	22.00
QPSK	10	≤ 12	0	24.00
QPSK	10	> 12	1	23.00
16QAM	10	≤ 12	1	23.00
16QAM	10	> 12	2	22.00
QPSK	5	≤ 8	0	24.00
QPSK	5	> 8	1	23.00
16QAM	5	≤ 8	1	23.00
16QAM	5	> 8	2	22.00



4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03																																							
FCC ID	QYLEM7355R																																						
Equipment Name	Wireless module																																						
Operating Frequency Range of each LTE transmission band	LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 05: 826.5 MHz ~ 846.5 MHz LTE Band 04: 1712.5 MHz ~ 1752.5 MHz LTE Band 02: 1852.5 MHz ~ 1907.5 MHz LTE Band 25: 1852.5 MHz ~ 1912.5 MHz																																						
Channel Bandwidth	LTE Band 17: 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 05: 5MHz, 10MHz LTE Band 04: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 02: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 25: 5MHz, 10MHz, 15MHz, 20MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Data only																																						
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor, when operation is enabled that LTE B13 / B17 / B5 / B26 power reduction applied to satisfy SAR compliance																																						



Transmission (H, M, L) channel numbers and frequencies in each LTE band								
LTE Band 17								
	Bandwidth 5 MHz				Bandwidth 10 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709	
M	23790		710		23790		710	
H	23825		713.5		23800		711	
LTE Band 13								
	Bandwidth 5 MHz				Bandwidth 10 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230	782		
M	23230		782					
H	23255		784.5					
LTE Band 5								
	Bandwidth 5 MHz				Bandwidth 10 MHz			
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)	
L	20425		826.5		20450		829	
M	20525		836.5		20525		836.5	
H	20625		846.5		20600		844	
LTE Band 4								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880
H	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 25								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880
H	26665	1912.5	26640	1910	26615	1907.5	26590	1905

Proximity sensor power reduction

Exposure Position / wireless mode	Bottom Face ⁽¹⁾	Edge 1	Edge 2	Edge 3	Edge 4
GSM850 GPRS (GMSK 1 Tx slot) - CS1	3.0 dB	0dB	0dB	0dB	0dB
GSM850 GPRS (GMSK 2 Tx slot) - CS1	5.0 dB				
GSM850 EDGE (8PSK 1 Tx slot) - MCS5	0.0 dB				
GSM850 EDGE (8PSK 2 Tx slot) - MCS5	0.0 dB				
GSM850 EDGE (8PSK 3 Tx slot) - MCS5	3.0 dB				
GSM850 EDGE (8PSK 4 Tx slot) - MCS5	3.0 dB				
WCDMA Band V	2.0 dB				
CDMA2000 BC10	3.0 dB				
CDMA2000 BC0	3.0 dB				
CDMA2000 BC1	1.0 dB				
LTE Band 13	2.0 dB				
LTE Band 5	2.0 dB				


Remark:

1. ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
2. Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
3. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Bottom Face: [10 mm](#)



Power Measurement during Sensor Trigger distance testing

Band/Mode	Ch #	Measured power reduction (dBm)		Reduction Levels
		w/o power back-off	w/ power back-off	(dB)
GSM850 (GMSK 2 Tx slot)	128	31.76	27.60	4.16
WCDMA Band V	4132	22.23	21.08	1.15
EVDO BC10	580	23.09	21.35	1.74
EVDO BC0	384	23.23	21.54	1.69
EVDO BC1	1175	23.33	23.30	1.03
LTE Band 13t	23230	22.60	21.01	1.59
LTE Band 5	20600	22.27	21.27	1.00

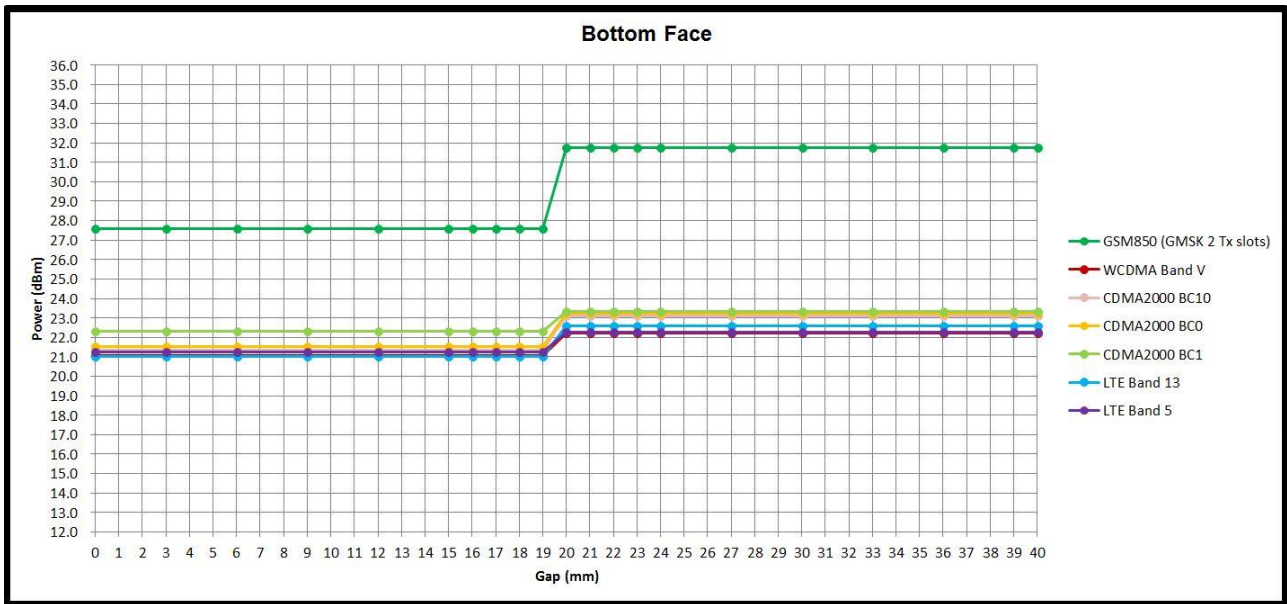



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.4, 8.0, 20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.08, 1.6, 4.0

- 1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 28, 2015	May. 27, 2016
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 20, 2015	Mar. 19, 2016
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 14, 2014	Nov. 13, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 24, 2015	Mar. 23, 2016
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2014	Aug. 20, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 13, 2014	Nov. 12, 2015
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 26, 2014	Sep. 25, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 21, 2014	Nov. 20, 2015
Wisewind	Thermometer	ETP-101	TM560	Oct. 21, 2014	Oct. 20, 2015
WonDer	Thermometer	WD-5015	TM685	Oct. 21, 2014	Oct. 20, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 06, 2015	Feb. 05, 2016
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 14, 2015	May. 13, 2016
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Agilent	Signal Generator	N5181A	MY50145381	Dec. 11, 2014	Dec. 10, 2015
R&S	Signal Generator	MG3710A	6201502524	May. 25, 2015	May. 24, 2016
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 11, 2015	Feb. 10, 2016
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 18, 2014	Nov. 17, 2015
Anritsu	Power Meter	ML2495A	1419002	May. 13, 2015	May. 12, 2016
Anritsu	Power Sensor	MA2411B	1339124	May. 13, 2015	May. 12, 2016
Anritsu	Power Meter	ML2495A	1349001	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 17, 2015	Jun. 16, 2016
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	MSL	22.4	0.964	57.237	0.96	55.50	0.42	3.13	±5	2015/7/20
835	MSL	22.5	0.978	53.298	0.97	55.20	0.82	-3.45	±5	2015/7/18
835	MSL	22.4	0.983	56.088	0.97	55.20	1.34	1.61	±5	2015/7/20
835	MSL	22.6	0.967	55.596	0.97	55.20	-0.31	0.72	±5	2015/7/21
1750	MSL	22.5	1.517	52.252	1.49	53.40	1.81	-2.15	±5	2015/7/17
1900	MSL	22.5	1.569	51.569	1.52	53.30	3.22	-3.25	±5	2015/7/17

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/7/20	750	MSL	250	D750V3-1012	ES3DV3 - SN3270	DAE4 Sn778	2.14	8.61	8.56	-0.58
2015/7/18	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn778	2.46	9.30	9.84	5.81
2015/7/20	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn778	2.43	9.30	9.72	4.52
2015/7/21	835	MSL	250	D835V2-499	EX3DV4 - SN3955	DAE4 Sn1399	2.42	9.30	9.68	4.09
2015/7/17	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE4 Sn778	9.15	38.00	36.60	-3.68
2015/7/17	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn778	10.20	39.80	40.80	2.51

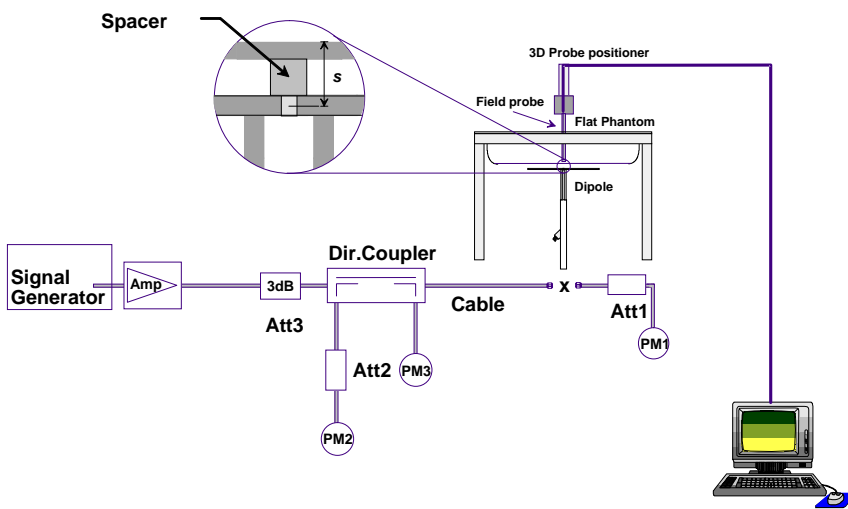


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r02 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03, for Body SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the GPRS 2Tx slots modes was selected when EUT operating without power back-off, the GPRS 2Tx slots modes was selected when EUT operating with power back-off, according to the highest source-based time-averaged output power.

Full Power Mode

Band GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot)	31.89	31.86	31.79	33.50	22.89	22.86	22.79	24.50
GPRS (GMSK, 2 Tx slots)	31.76	31.73	31.67	33.00	25.76	25.73	25.67	27.00
EDGE (8PSK, 1 Tx slot)	26.47	26.45	26.43	28.00	17.47	17.45	17.43	19.00
EDGE (8PSK, 2 Tx slots)	26.34	26.29	26.37	27.00	20.34	20.29	20.37	21.00
EDGE (8PSK, 3 Tx slots)	26.18	26.14	26.17	27.00	21.92	21.88	21.91	22.74
EDGE (8PSK, 4 Tx slots)	25.97	25.92	25.96	27.00	22.97	22.92	22.96	24.00

Band GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS (GMSK, 1 Tx slot)	28.89	28.99	28.77	30.50	19.89	19.99	19.77	21.50
GPRS (GMSK, 2 Tx slots)	28.77	28.88	28.74	30.00	22.77	22.88	22.74	24.00
EDGE (8PSK, 1 Tx slot)	25.00	25.07	25.09	27.00	16.00	16.07	16.09	18.00
EDGE (8PSK, 2 Tx slots)	24.89	24.95	24.93	26.00	18.89	18.95	18.93	20.00
EDGE (8PSK, 3 Tx slots)	24.79	24.85	24.85	26.00	20.53	20.59	20.59	21.74
EDGE (8PSK, 4 Tx slots)	24.71	24.77	24.77	26.00	21.71	21.77	21.77	23.00

Reduced Power Mode

Band GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot)	29.49	29.46	29.42	30.50	20.49	20.46	20.42	21.50
GPRS (GMSK, 2 Tx slots)	27.60	27.52	27.55	28.00	21.60	21.52	21.55	22.00
EDGE (8PSK, 1 Tx slot)	26.47	26.45	26.43	28.00	17.47	17.45	17.43	19.00
EDGE (8PSK, 2 Tx slots)	26.34	26.29	26.37	27.00	20.34	20.29	20.37	21.00
EDGE (8PSK, 3 Tx slots)	23.85	23.80	23.76	24.00	19.59	19.54	19.50	19.74
EDGE (8PSK, 4 Tx slots)	23.61	23.67	23.73	24.00	20.61	20.67	20.73	21.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

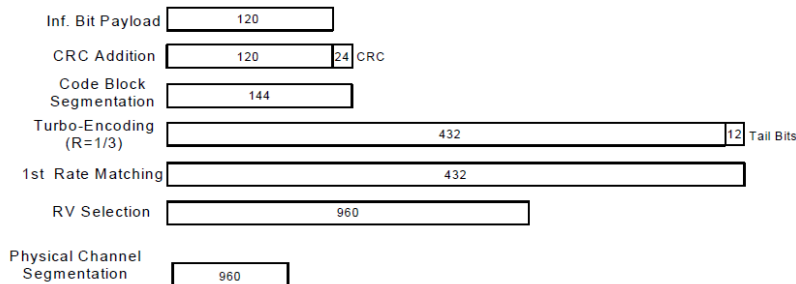


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03, for Body exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Full Power Mode

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel			4357	4407	4458	9662	9800	9938	1537	1638	1738
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR (dB)	3GPP Rel 99	RMC 12.2Kbps	22.23	22.15	22.18	22.75	22.48	22.54	22.37	22.35	22.44
0	3GPP Rel 6	HSDPA Subtest-1	22.00	22.07	22.10	22.44	22.39	22.35	22.33	22.30	22.30
0	3GPP Rel 6	HSDPA Subtest-2	22.02	22.05	22.06	22.41	22.38	22.33	22.31	22.28	22.27
0.5	3GPP Rel 6	HSDPA Subtest-3	21.52	21.63	21.65	22.02	21.94	21.91	21.94	21.91	21.90
0.5	3GPP Rel 6	HSDPA Subtest-4	21.50	21.57	21.64	22.00	21.94	21.90	21.92	21.89	21.90
0	3GPP Rel 8	DC-HSDPA Subtest-1	22.00	22.06	22.09	22.43	22.38	22.34	22.32	22.30	22.29
0	3GPP Rel 8	DC-HSDPA Subtest-2	22.00	22.05	22.06	22.00	22.38	22.32	22.30	22.28	22.28
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	21.51	21.62	21.63	22.01	21.93	21.90	21.93	21.90	21.90
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	21.50	21.55	21.63	22.01	21.92	21.90	21.92	21.90	21.96
0	3GPP Rel 6	HSUPA Subtest-1	22.07	22.04	22.05	22.01	22.00	22.00	22.08	22.03	22.06
2	3GPP Rel 6	HSUPA Subtest-2	20.71	20.79	20.87	20.51	20.74	20.88	20.29	20.28	20.32
1	3GPP Rel 6	HSUPA Subtest-3	21.04	21.02	21.11	21.02	21.17	21.18	21.17	21.15	21.28
2	3GPP Rel 6	HSUPA Subtest-4	20.75	20.82	20.91	20.63	20.62	20.94	20.34	20.39	20.33
0	3GPP Rel 6	HSUPA Subtest-5	22.20	22.13	22.15	22.02	22.14	22.10	22.10	22.13	22.13

Reduced Power Mode

Band			WCDMA V		
TX Channel			4132	4182	4233
Rx Channel			4357	4407	4458
Frequency (MHz)			826.4	836.4	846.6
MPR (dB)	3GPP Rel 99	RMC 12.2Kbps	21.08	21.03	21.06
0	3GPP Rel 6	HSDPA Subtest-1	20.85	20.95	20.98
0	3GPP Rel 6	HSDPA Subtest-2	20.87	20.93	20.94
0.5	3GPP Rel 6	HSDPA Subtest-3	20.37	20.51	20.53
0.5	3GPP Rel 6	HSDPA Subtest-4	20.35	20.45	20.52
0	3GPP Rel 8	DC-HSDPA Subtest-1	20.85	20.94	20.97
0	3GPP Rel 8	DC-HSDPA Subtest-2	20.85	20.93	20.94
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	20.36	20.50	20.51
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	20.35	20.43	20.51
0	3GPP Rel 6	HSUPA Subtest-1	20.92	20.92	20.93
2	3GPP Rel 6	HSUPA Subtest-2	19.56	19.67	19.75
1	3GPP Rel 6	HSUPA Subtest-3	19.89	19.90	19.99
2	3GPP Rel 6	HSUPA Subtest-4	19.60	19.70	19.79
0	3GPP Rel 6	HSUPA Subtest-5	21.05	21.01	21.03



<CDMA2000 Conducted Power>

General Note:

1. Per KDB 941225 D01v03, in body SAR tested, the EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.

Full Power Mode

Band	CDMA2000 BC10			CDMA2000 BC0			CDMA2000 BC1		
	TX Channel	476	580	684	1013	384	777	25	600
Frequency (MHz)	817.9	820.5	823.1	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	23.10	23.00	23.05	23.08	23.24	23.03	23.31	23.40	23.45
1xRTT RC3 SO55	23.11	23.01	23.07	23.09	23.26	23.07	23.34	23.42	23.49
1xEVDO RTAP 153.6Kbps	23.05	23.09	23.04	23.02	23.23	23.03	23.14	23.19	23.33
1xEVDO RETAP 4096Bits	23.03	23.08	23.02	23.06	23.24	23.06	23.18	23.20	23.28

Reduced Power Mode

Band	CDMA2000 BC10			CDMA2000 BC0			CDMA2000 BC1		
	TX Channel	476	580	684	1013	384	777	25	600
Frequency (MHz)	817.9	820.5	823.1	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	21.22	21.42	21.35	21.35	21.37	21.25	22.25	22.14	22.23
1xRTT RC3 SO55	21.15	21.38	21.25	21.12	21.41	21.09	22.22	22.10	22.30
1xEVDO RTAP 153.6Kbps	21.29	21.35	21.08	21.49	21.54	21.42	22.28	22.15	22.30
1xEVDO RETAP 4096Bits	21.28	21.37	21.11	21.32	21.45	21.37	22.25	22.14	22.28

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



Full RF Power Mode

<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.56	22.60	22.48	24	0
10	QPSK	1	24	22.32	22.33	22.36		
10	QPSK	1	49	22.39	22.31	22.22		
10	QPSK	25	0	21.46	21.53	21.48	23	1
10	QPSK	25	12	21.51	21.50	21.45		
10	QPSK	25	24	21.52	21.40	21.30		
10	QPSK	50	0	21.27	21.37	21.36		
10	16QAM	1	0	21.22	21.31	21.39	23	1
10	16QAM	1	24	21.58	21.64	21.55		
10	16QAM	1	49	21.35	21.31	21.11		
10	16QAM	25	0	20.40	20.39	20.45	22	2
10	16QAM	25	12	20.50	20.45	20.45		
10	16QAM	25	24	20.46	20.42	20.29		
10	16QAM	50	0	20.22	20.24	20.27		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.19	22.45	22.44	24	0
5	QPSK	1	12	22.44	22.49	22.42		
5	QPSK	1	24	22.57	22.39	22.12		
5	QPSK	12	0	21.34	21.60	21.35	23	1
5	QPSK	12	6	21.42	21.64	21.47		
5	QPSK	12	11	21.58	21.44	21.29		
5	QPSK	25	0	21.39	21.55	21.37	23	1
5	16QAM	1	0	21.15	21.44	21.42		
5	16QAM	1	12	21.41	21.47	21.36		
5	16QAM	1	24	21.56	21.41	21.03		
5	16QAM	12	0	20.34	20.54	20.40	22	2
5	16QAM	12	6	20.45	20.59	20.39		
5	16QAM	12	11	20.52	20.49	20.24		
5	16QAM	25	0	20.41	20.49	20.27		



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	22.60			24	0
10	QPSK	1	24	22.30				
10	QPSK	1	49	22.49				
10	QPSK	25	0	21.37			23	1
10	QPSK	25	12	21.32				
10	QPSK	25	24	21.37				
10	QPSK	50	0	21.28				
10	16QAM	1	0	21.60			23	1
10	16QAM	1	24	21.48				
10	16QAM	1	49	21.39				
10	16QAM	25	0	20.21			22	2
10	16QAM	25	12	20.42				
10	16QAM	25	24	20.32				
10	16QAM	50	0	20.23				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.48	22.16	22.57	24	0
5	QPSK	1	12	22.23	22.49	22.51		
5	QPSK	1	24	22.21	22.34	22.38		
5	QPSK	12	0	21.23	21.40	21.48	23	1
5	QPSK	12	6	21.27	21.50	21.57		
5	QPSK	12	11	21.33	21.47	21.39		
5	QPSK	25	0	21.24	21.35	21.39		
5	16QAM	1	0	21.54	21.16	21.65	23	1
5	16QAM	1	12	21.23	21.56	21.50		
5	16QAM	1	24	21.37	21.40	21.39		
5	16QAM	12	0	20.28	20.51	20.52	22	2
5	16QAM	12	6	20.27	20.48	20.49		
5	16QAM	12	11	20.41	20.46	20.53		
5	16QAM	25	0	20.23	20.43	20.43		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.25	22.24	22.27	24	0
10	QPSK	1	24	22.11	22.19	22.16		
10	QPSK	1	49	22.05	22.16	22.18		
10	QPSK	25	0	21.22	21.15	21.25	23	1
10	QPSK	25	12	21.24	21.24	21.16		
10	QPSK	25	24	21.17	21.01	21.22		
10	QPSK	50	0	21.16	21.20	21.21		
10	16QAM	1	0	21.06	21.23	21.34	23	1
10	16QAM	1	24	21.15	21.23	21.31		
10	16QAM	1	49	21.09	21.16	21.20		
10	16QAM	25	0	20.20	20.21	20.18	22	2
10	16QAM	25	12	20.10	20.21	20.17		
10	16QAM	25	24	20.05	20.06	20.18		
10	16QAM	50	0	20.04	20.08	20.09		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.13	22.08	22.01	24	0
5	QPSK	1	12	22.18	22.02	22.24		
5	QPSK	1	24	22.12	22.01	22.21		
5	QPSK	12	0	21.29	21.14	21.26	23	1
5	QPSK	12	6	21.25	21.27	21.27		
5	QPSK	12	11	21.27	21.06	21.33		
5	QPSK	25	0	21.13	21.21	21.20	23	1
5	16QAM	1	0	21.21	21.17	21.17		
5	16QAM	1	12	21.15	21.06	21.32		
5	16QAM	1	24	21.16	21.07	21.12	22	2
5	16QAM	12	0	20.19	20.16	20.32		
5	16QAM	12	6	20.21	20.20	20.30		
5	16QAM	12	11	20.28	20.10	20.23		
5	16QAM	25	0	20.04	20.17	20.21		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.46	22.44	22.50	24	0
20	QPSK	1	49	22.44	22.35	22.36		
20	QPSK	1	99	22.43	22.39	22.31		
20	QPSK	50	0	21.14	21.24	21.31	23	1
20	QPSK	50	24	21.19	21.16	21.14		
20	QPSK	50	49	21.12	21.29	21.16		
20	QPSK	100	0	21.13	21.11	21.19	23	1
20	16QAM	1	0	21.48	21.53	21.53		
20	16QAM	1	49	21.49	21.54	21.44		
20	16QAM	1	99	21.52	21.49	21.39	22	2
20	16QAM	50	0	20.17	20.23	20.19		
20	16QAM	50	24	20.18	20.22	20.22		
20	16QAM	50	49	20.13	20.22	20.21	22	2
20	16QAM	100	0	20.18	20.17	20.15		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.43	22.40	22.44	24	0
15	QPSK	1	37	22.41	22.39	22.48		
15	QPSK	1	74	22.26	22.38	22.20		
15	QPSK	36	0	21.19	21.27	21.13	23	1
15	QPSK	36	18	21.22	21.27	21.29		
15	QPSK	36	37	21.24	21.17	21.18		
15	QPSK	75	0	21.22	21.32	21.11	23	1
15	16QAM	1	0	21.37	21.51	21.39		
15	16QAM	1	37	21.42	21.51	21.42		
15	16QAM	1	74	21.31	21.49	21.23	22	2
15	16QAM	36	0	20.13	20.38	20.17		
15	16QAM	36	18	20.14	20.27	20.28		
15	16QAM	36	37	20.12	20.23	20.29	22	2
15	16QAM	75	0	20.14	20.19	20.14		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.47	22.45	22.42	24	0
10	QPSK	1	24	22.39	22.42	22.41		
10	QPSK	1	49	22.45	22.37	22.27		
10	QPSK	25	0	21.30	21.52	21.30	23	1
10	QPSK	25	12	21.25	21.35	21.34		
10	QPSK	25	24	21.17	21.34	21.35		
10	QPSK	50	0	21.12	21.30	21.11	23	1
10	16QAM	1	0	21.50	21.69	21.44		
10	16QAM	1	24	21.42	21.37	21.37		
10	16QAM	1	49	21.42	21.42	21.35	22	2
10	16QAM	25	0	20.29	20.36	20.34		
10	16QAM	25	12	20.34	20.30	20.38		
10	16QAM	25	24	20.26	20.27	20.38	22	2
10	16QAM	50	0	20.27	20.25	20.21		



BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				19975	20175	20375		
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.40	22.43	22.38	24	0
5	QPSK	1	12	22.36	22.42	22.44		
5	QPSK	1	24	22.36	22.48	22.29		
5	QPSK	12	0	21.42	21.56	21.45	23	1
5	QPSK	12	6	21.41	21.47	21.44		
5	QPSK	12	11	21.30	21.44	21.31		
5	QPSK	25	0	21.22	21.46	21.27		
5	16QAM	1	0	21.41	21.47	21.47	23	1
5	16QAM	1	12	21.43	21.47	21.39		
5	16QAM	1	24	21.44	21.51	21.36		
5	16QAM	12	0	20.33	20.67	20.37	22	2
5	16QAM	12	6	20.38	20.44	20.54		
5	16QAM	12	11	20.27	20.36	20.44		
5	16QAM	25	0	20.21	20.40	20.34		



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.54	22.57	22.62	24	0
20	QPSK	1	49	22.48	22.49	22.49		
20	QPSK	1	99	22.41	22.37	22.43		
20	QPSK	50	0	21.26	21.23	21.29	23	1
20	QPSK	50	24	21.23	21.22	21.28		
20	QPSK	50	49	21.27	21.27	21.26		
20	QPSK	100	0	21.38	21.33	21.39	23	1
20	16QAM	1	0	21.52	21.69	21.53		
20	16QAM	1	49	21.51	21.64	21.54		
20	16QAM	1	99	21.55	21.53	21.65	22	2
20	16QAM	50	0	20.41	20.33	20.22		
20	16QAM	50	24	20.19	20.26	20.28		
20	16QAM	50	49	20.26	20.20	20.27	22	2
20	16QAM	100	0	20.28	20.31	20.23		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	22.52	22.45	22.47	24	0
15	QPSK	1	37	22.61	22.51	22.56		
15	QPSK	1	74	22.38	22.46	22.55		
15	QPSK	36	0	21.45	21.45	21.29	23	1
15	QPSK	36	18	21.24	21.38	21.39		
15	QPSK	36	37	21.31	21.22	21.37		
15	QPSK	75	0	21.29	21.37	21.35	23	1
15	16QAM	1	0	21.49	21.52	21.51		
15	16QAM	1	37	21.54	21.52	21.57		
15	16QAM	1	74	21.45	21.57	21.69	22	2
15	16QAM	36	0	20.42	20.32	20.34		
15	16QAM	36	18	20.33	20.23	20.38		
15	16QAM	36	37	20.35	20.41	20.40	22	2
15	16QAM	75	0	20.30	20.25	20.33		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905	Tune-up limit (dBm)	MPR (dB)
10	QPSK	1	0	22.48	22.51	22.45	24	0
10	QPSK	1	24	22.41	22.57	22.50		
10	QPSK	1	49	22.44	22.45	22.52		
10	QPSK	25	0	21.47	21.52	21.48	23	1
10	QPSK	25	12	21.51	21.42	21.45		
10	QPSK	25	24	21.35	21.48	21.52		
10	QPSK	50	0	21.27	21.35	21.38	23	1
10	16QAM	1	0	21.27	21.54	21.54		
10	16QAM	1	24	21.26	21.61	21.58		
10	16QAM	1	49	21.27	21.66	21.70	22	2
10	16QAM	25	0	20.86	20.52	20.50		
10	16QAM	25	12	20.60	20.34	20.48		
10	16QAM	25	24	20.44	20.35	20.50	22	2
10	16QAM	50	0	20.25	20.35	20.33		



BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18625	18900	19175	24	0
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.49	22.48	22.55		
5	QPSK	1	12	22.31	22.50	22.58	23	1
5	QPSK	1	24	22.44	22.57	22.59		
5	QPSK	12	0	21.37	21.64	21.64		
5	QPSK	12	6	21.29	21.53	21.61	23	1
5	QPSK	12	11	21.46	21.47	21.65		
5	QPSK	25	0	21.34	21.45	21.50		
5	16QAM	1	0	21.40	21.48	21.56	23	1
5	16QAM	1	12	21.35	21.55	21.72		
5	16QAM	1	24	21.32	21.55	21.75		
5	16QAM	12	0	20.48	20.64	20.61	22	2
5	16QAM	12	6	20.29	20.55	20.59		
5	16QAM	12	11	20.50	20.63	20.74		
5	16QAM	25	0	20.18	20.41	20.48		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.56	22.49	22.74	24	0
20	QPSK	1	49	22.51	22.41	22.62		
20	QPSK	1	99	22.49	22.49	22.54		
20	QPSK	50	0	21.22	21.42	21.48	23	1
20	QPSK	50	24	21.30	21.27	21.29		
20	QPSK	50	49	21.30	21.35	21.38		
20	QPSK	100	0	21.51	21.41	21.52	23	1
20	16QAM	1	0	21.59	21.68	21.65		
20	16QAM	1	49	21.70	21.41	21.64		
20	16QAM	1	99	21.49	21.49	21.58	22	2
20	16QAM	50	0	20.23	20.28	20.45		
20	16QAM	50	24	20.30	20.33	20.43		
20	16QAM	50	49	20.33	20.43	20.37	22	2
20	16QAM	100	0	20.61	20.41	20.49		
Channel				26115	26340	26615		
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.54	22.51	22.67	24	0
15	QPSK	1	37	22.67	22.35	22.63		
15	QPSK	1	74	22.47	22.41	22.62		
15	QPSK	36	0	21.28	21.35	21.49	23	1
15	QPSK	36	18	21.40	21.27	21.47		
15	QPSK	36	37	21.25	21.50	21.64		
15	QPSK	75	0	21.47	21.31	21.40	23	1
15	16QAM	1	0	21.54	21.61	21.82		
15	16QAM	1	37	21.61	21.56	21.68		
15	16QAM	1	74	21.53	21.53	21.78	22	2
15	16QAM	36	0	20.35	20.49	20.53		
15	16QAM	36	18	20.40	20.26	20.50		
15	16QAM	36	37	20.32	20.45	20.53	22	2
15	16QAM	75	0	20.43	20.42	20.49		
Channel				26090	26340	26640		
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.45	22.58	22.70	24	0
10	QPSK	1	24	22.61	22.45	22.57		
10	QPSK	1	49	22.35	22.53	22.65		
10	QPSK	25	0	21.30	21.48	21.71	23	1
10	QPSK	25	12	21.41	21.28	21.63		
10	QPSK	25	24	21.28	21.57	21.62		
10	QPSK	50	0	21.48	21.37	21.57	23	1
10	16QAM	1	0	21.42	21.56	21.72		
10	16QAM	1	24	21.62	21.40	21.65		
10	16QAM	1	49	21.39	21.54	21.75	22	2
10	16QAM	25	0	20.37	20.51	20.73		
10	16QAM	25	12	20.54	20.34	20.65		
10	16QAM	25	24	20.37	20.55	20.65	22	2
10	16QAM	50	0	20.59	20.42	20.53		



BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26065	26340	26665	24	0
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.45	22.55	22.70		
5	QPSK	1	12	22.60	22.43	22.61	23	1
5	QPSK	1	24	22.42	22.58	22.68		
5	QPSK	12	0	21.55	21.62	21.85		
5	QPSK	12	6	21.47	21.51	21.78	23	1
5	QPSK	12	11	21.38	21.76	21.72		
5	QPSK	25	0	21.52	21.62	21.76		
5	16QAM	1	0	21.40	21.49	21.70	23	1
5	16QAM	1	12	21.51	21.58	21.72		
5	16QAM	1	24	21.36	21.70	21.76		
5	16QAM	12	0	20.57	20.61	20.91	22	2
5	16QAM	12	6	20.67	20.46	20.77		
5	16QAM	12	11	20.56	20.73	20.78		
5	16QAM	25	0	20.47	20.67	20.83		



Reduced RF Power Mode

<LTE Band 13>


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	21.01			22	0
10	QPSK	1	24	20.98				
10	QPSK	1	49	20.89				
10	QPSK	25	0	20.85			22	0
10	QPSK	25	12	20.76				
10	QPSK	25	24	20.74				
10	QPSK	50	0	20.58			22	0
10	16QAM	1	0	20.51				
10	16QAM	1	24	20.73				
10	16QAM	1	49	20.56			21	1
10	16QAM	25	0	19.98				
10	16QAM	25	12	20.17				
10	16QAM	25	24	20.22			21	1
10	16QAM	50	0	20.06				
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	20.56	20.58	20.76	22	0
5	QPSK	1	12	20.63	20.74	20.74		
5	QPSK	1	24	20.76	20.71	20.60		
5	QPSK	12	0	20.48	20.59	20.84	22	0
5	QPSK	12	6	20.51	20.77	20.68		
5	QPSK	12	11	20.61	20.76	20.66		
5	QPSK	25	0	20.52	20.72	20.75	22	0
5	16QAM	1	0	20.50	20.56	20.76		
5	16QAM	1	12	20.56	20.72	20.70		
5	16QAM	1	24	20.70	20.69	20.57	21	1
5	16QAM	12	0	20.07	20.18	20.33		
5	16QAM	12	6	20.11	20.31	20.31		
5	16QAM	12	11	20.18	20.28	20.22	21	1
5	16QAM	25	0	20.00	20.20	20.23		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.14	21.22	21.27	22	0
10	QPSK	1	24	21.17	21.15	21.22		
10	QPSK	1	49	21.22	21.19	21.05		
10	QPSK	25	0	21.25	21.21	21.26	22	0
10	QPSK	25	12	21.05	21.04	20.99		
10	QPSK	25	24	21.04	21.03	21.03		
10	QPSK	50	0	20.91	20.92	20.94	22	0
10	16QAM	1	0	21.09	21.16	21.11		
10	16QAM	1	24	21.18	21.18	21.16		
10	16QAM	1	49	21.18	21.18	21.00	21	1
10	16QAM	25	0	20.17	20.12	20.12		
10	16QAM	25	12	20.12	20.12	20.02		
10	16QAM	25	24	20.11	20.17	20.02	21	1
10	16QAM	50	0	19.98	20.01	19.91		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.02	21.25	21.18	22	0
5	QPSK	1	12	21.16	21.20	21.13		
5	QPSK	1	24	21.17	21.19	21.04		
5	QPSK	12	0	20.94	21.18	21.12	22	0
5	QPSK	12	6	21.14	21.18	21.08		
5	QPSK	12	11	21.14	21.19	20.98		
5	QPSK	25	0	21.01	21.16	20.97	22	0
5	16QAM	1	0	21.06	21.22	21.08		
5	16QAM	1	12	21.18	21.16	21.01		
5	16QAM	1	24	21.21	21.19	20.89	21	1
5	16QAM	12	0	20.23	20.26	20.15		
5	16QAM	12	6	20.29	20.28	20.09		
5	16QAM	12	11	20.29	20.29	20.00	21	1
5	16QAM	25	0	20.17	20.12	19.91		

13. Antenna Location

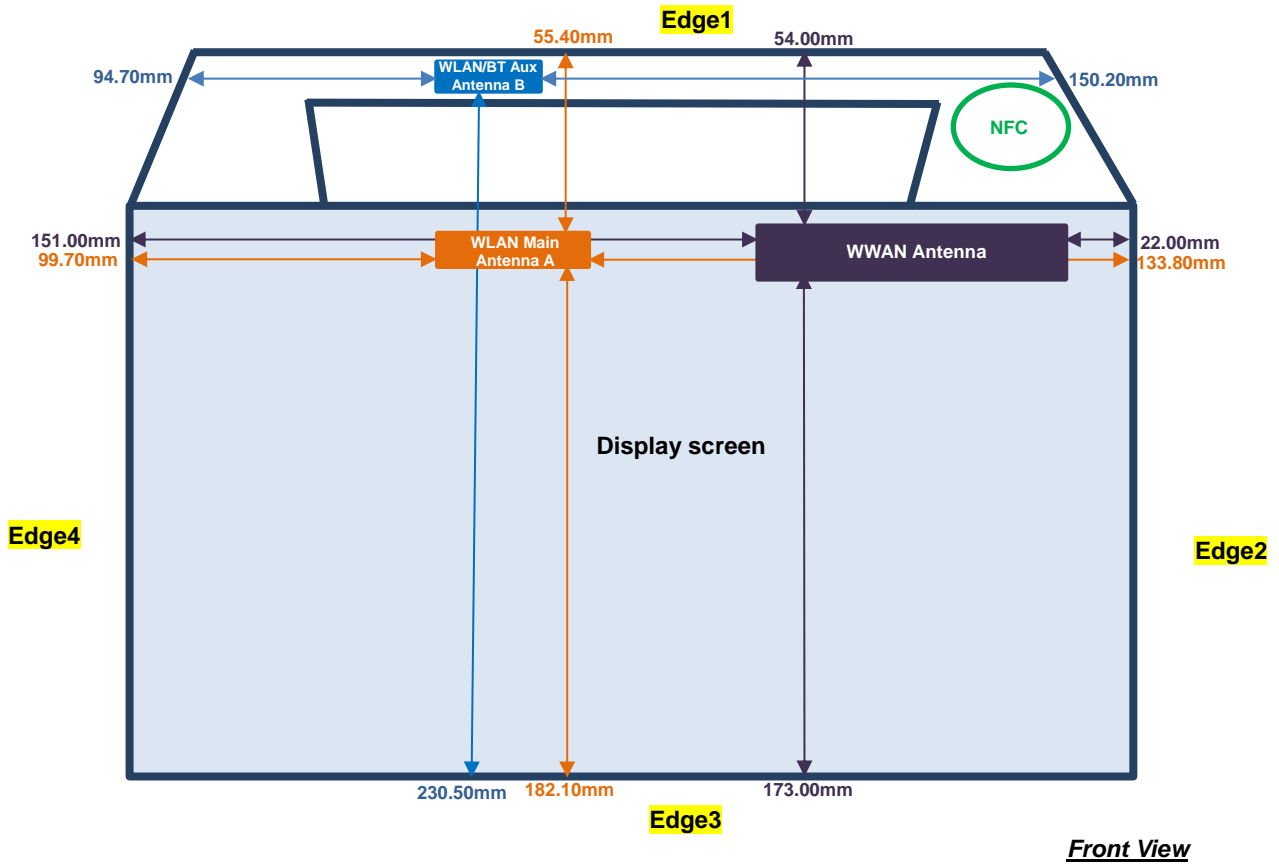

<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)· 10] mW at > 1500 MHz and ≤ 6 GHz
7. For the bottom-face that proximity sensor power reduction is applied for SAR compliance, additional SAR testing at "sensor trigger distance – 10mm" with EUT transmitting full power in normal mode was performed.

Exposure Position	Wireless Interface	GPRS 850 Class 10	GPRS 1900 Class 10	WCDMA Band V	WCDMA Band IV	WCDMA Band II	CDMA BC10	CDMA BC0	CDMA BC1	LTE Band 17	LTE Band 13	LTE Band 5	LTE Band 4	LTE Band 2	LTE Band 25
	Calculated Frequency	848MHz	1909MHz	846MHz	1750MHz	1907MHz	846MHz	848MHz	1907MHz	713MHz	784MHz	848MHz	1754MHz	1909MHz	1914MHz
	Maximum power (dBm)	27.	24	24	24	24	25	25	25	24	24	24	24	24	24
	Maximum rated power(mW)	501.0	251.0	251.0	251.0	251.0	316.0	316.0	316.0	251.0	251.0	251.0	251.0	251.0	251.0
Bottom Face	Separation distance(mm)	5.0													
	exclusion threshold	92.3	69.4	46.2	66.4	69.3	58.1	58.2	87.3	42.4	44.5	46.2	66.5	69.4	69.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	54.0													
	exclusion threshold	186.0	149.0	186.0	153.0	149.0	186.0	186.0	149.0	197.0	190.0	186.0	153.0	149.0	148.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	22.0													
	exclusion threshold	21.0	15.8	10.5	15.1	15.8	13.2	13.2	19.8	9.6	10.1	10.5	15.1	15.8	15.8
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	173.0													
	exclusion threshold	858.0	1339.0	857.0	1343.0	1339.0	857.0	858.0	1339.0	762.0	812.0	858.0	1343.0	1339.0	1338.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	151.0													
	exclusion threshold	734.0	1119.0	733.0	1123.0	1119.0	733.0	734.0	1119.0	658.0	697.0	734.0	1123.0	1119.0	1118.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 10mm for bottom face.
4. Per KDB 941225 D01v03, for Body SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the GPRS 2Tx slots modes was selected when EUT operating without power back-off, the GPRS 2Tx slots modes was selected when EUT operating with power back-off, according to the highest source-based time-averaged output power.
5. Per KDB 941225 D01v03, for Body exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
6. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.
7. Per KDB 941225 D01v03, in body SAR tested, the EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
8. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
9. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
10. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
11. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> 1/2$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
12. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $> 1/2$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
13. According to April 2015 TCB workshop (Overlapping LTE Bands), for LTE B2 test exclusion, due to:
 - a. the maximum output power, including tolerance, for the smaller band must be \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band
 - c. Therefore the LTE B25 SAR test result is covering LTE B2, so the LTE B2 SAR is not necessary.



14.1 Body SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (2 Tx slots)	Bottom Face	10mm	OFF	128	824.2	31.76	33.00	1.330	0.01	0.590	0.785
01	GSM850	GPRS (2 Tx slots)	Bottom Face	0mm	ON	128	824.2	27.60	28.00	1.096	0.04	0.953	1.045
	GSM850	GPRS (2 Tx slots)	Bottom Face	0mm	ON	189	836.4	27.52	28.00	1.117	0.12	0.924	1.032
	GSM850	GPRS (2 Tx slots)	Bottom Face	0mm	ON	251	848.8	27.55	28.00	1.109	0.18	0.941	1.044
	GSM850	GPRS (2 Tx slots)	Edge 1	0mm	OFF	128	824.2	31.76	33.00	1.330	0.01	0.027	0.036
	GSM850	GPRS (2 Tx slots)	Edge 2	0mm	OFF	128	824.2	31.76	33.00	1.330	0.14	0.111	0.148
	GSM1900	GPRS (2 Tx slots)	Bottom Face	0mm	OFF	661	1880	28.88	30.00	1.294	0.03	0.693	0.897
	GSM1900	GPRS (2 Tx slots)	Bottom Face	0mm	OFF	512	1850.2	28.77	30.00	1.327	-0.08	0.690	0.916
02	GSM1900	GPRS (2 Tx slots)	Bottom Face	0mm	OFF	810	1909.8	28.74	30.00	1.337	-0.01	0.732	0.978
	GSM1900	GPRS (2 Tx slots)	Edge 1	0mm	OFF	661	1880	28.88	30.00	1.294	0.05	0.061	0.079
	GSM1900	GPRS (2 Tx slots)	Edge 2	0mm	OFF	661	1880	28.88	30.00	1.294	0.05	0.129	0.167

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Bottom Face	10mm	OFF	4132	826.4	22.23	24.00	1.503	0.13	0.438	0.658
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4132	826.4	21.08	22.00	1.236	-0.12	0.851	1.052
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4182	836.4	21.03	22.00	1.250	0.05	0.883	1.104
03	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	21.06	22.00	1.242	0.02	0.924	1.147
	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	OFF	4132	826.4	22.23	24.00	1.503	-0.01	0.024	0.036
	WCDMA V	RMC 12.2Kbps	Edge 2	0mm	OFF	4132	826.4	22.23	24.00	1.503	0.05	0.099	0.149
04	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	OFF	1513	1752.6	22.44	24.00	1.432	0.03	0.655	0.938
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	OFF	1312	1712.4	22.37	24.00	1.455	-0.05	0.568	0.827
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	OFF	1413	1732.6	22.35	24.00	1.462	-0.01	0.585	0.855
	WCDMA IV	RMC 12.2Kbps	Edge 1	0mm	OFF	1513	1752.6	22.44	24.00	1.432	0.11	0.059	0.084
	WCDMA IV	RMC 12.2Kbps	Edge 2	0mm	OFF	1513	1752.6	22.44	24.00	1.432	0.05	0.177	0.253
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	OFF	9262	1852.4	22.75	24.00	1.334	0.02	0.764	1.019
05	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	OFF	9400	1880	22.48	24.00	1.419	0.11	0.775	1.100
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	OFF	9538	1907.6	22.54	24.00	1.400	-0.02	0.747	1.045
	WCDMA II	RMC 12.2Kbps	Edge 1	0mm	OFF	9262	1852.4	22.75	24.00	1.334	0.12	0.066	0.088
	WCDMA II	RMC 12.2Kbps	Edge 2	0mm	OFF	9262	1852.4	22.75	24.00	1.334	-0.03	0.164	0.219



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Face	10mm	OFF	580	820.5	23.09	25.00	1.552	0.11	0.431	0.669
06	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Face	0mm	ON	580	820.5	21.35	22.00	1.161	0.17	1.020	1.185
	CDMA2000 BC10	RTAP 153.6Kbps	Edge 1	0mm	OFF	580	820.5	23.09	25.00	1.552	0.19	0.035	0.054
	CDMA2000 BC10	RTAP 153.6Kbps	Edge 2	0mm	OFF	580	820.5	23.09	25.00	1.552	0.11	0.133	0.206
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Face	10mm	OFF	384	836.52	23.23	25.00	1.503	0.11	0.399	0.600
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	384	836.52	21.54	22.00	1.112	-0.01	1.060	1.178
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	1013	824.7	21.49	22.00	1.125	0.04	0.990	1.113
07	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	777	848.31	21.42	22.00	1.143	0.01	1.040	1.189
	CDMA2000 BC0	RTAP 153.6Kbps	Edge 1	0mm	OFF	384	836.52	23.23	25.00	1.503	0.12	0.032	0.048
	CDMA2000 BC0	RTAP 153.6Kbps	Edge 2	0mm	OFF	384	836.52	23.23	25.00	1.503	0.06	0.089	0.134
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Face	10mm	OFF	1175	1908.75	23.33	25.00	1.469	0.06	0.256	0.376
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Face	0mm	ON	1175	1908.75	22.30	24.00	1.479	0.05	0.664	0.982
08	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Face	0mm	ON	25	1851.25	22.28	24.00	1.486	0	0.676	1.004
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Face	0mm	ON	600	1880	22.15	24.00	1.531	0.03	0.656	1.004
	CDMA2000 BC1	RTAP 153.6Kbps	Edge 1	0mm	OFF	1175	1908.75	23.33	25.00	1.469	0.03	0.079	0.116
	CDMA2000 BC1	RTAP 153.6Kbps	Edge 2	0mm	OFF	1175	1908.75	23.33	25.00	1.469	0.02	0.177	0.260

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 17	10M	QPSK	1RB	0Offset	Bottom Face	0mm	OFF	23790	710	22.60	24.00	1.380	-0.02	0.562	0.776
	LTE Band 17	10M	QPSK	25RB	0Offset	Bottom Face	0mm	OFF	23790	710	21.53	23.00	1.403	0.02	0.424	0.595
	LTE Band 17	10M	QPSK	1RB	0Offset	Edge 1	0mm	OFF	23790	710	22.60	24.00	1.380	-0.02	0.017	0.023
	LTE Band 17	10M	QPSK	25RB	0Offset	Edge 1	0mm	OFF	23790	710	21.53	23.00	1.403	0.11	0.015	0.021
	LTE Band 17	10M	QPSK	1RB	0Offset	Edge 2	0mm	OFF	23790	710	22.60	24.00	1.380	0.07	0.062	0.086
	LTE Band 17	10M	QPSK	25RB	0Offset	Edge 2	0mm	OFF	23790	710	21.53	23.00	1.403	0.03	0.066	0.093
	LTE Band 13	10M	QPSK	1RB	0Offset	Bottom Face	10mm	OFF	23230	782	22.60	24.00	1.380	-0.07	0.427	0.589
	LTE Band 13	10M	QPSK	25RB	0Offset	Bottom Face	10mm	OFF	23230	782	21.37	23.00	1.455	-0.03	0.403	0.587
10	LTE Band 13	10M	QPSK	1RB	0Offset	Bottom Face	0mm	ON	23230	782	21.01	22.00	1.256	-0.02	0.797	1.001
	LTE Band 13	10M	QPSK	25RB	0Offset	Bottom Face	0mm	ON	23230	782	20.85	22.00	1.303	-0.13	0.742	0.967
	LTE Band 13	10M	QPSK	50RB	0Offset	Bottom Face	0mm	ON	23230	782	20.58	22.00	1.387	-0.03	0.713	0.989
	LTE Band 13	10M	QPSK	1RB	0Offset	Edge 1	0mm	OFF	23230	782	22.60	24.00	1.380	0.15	0.035	0.048
	LTE Band 13	10M	QPSK	25RB	0Offset	Edge 1	0mm	OFF	23230	782	21.37	23.00	1.455	0.05	0.031	0.045
	LTE Band 13	10M	QPSK	1RB	0Offset	Edge 2	0mm	OFF	23230	782	22.60	24.00	1.380	0.09	0.112	0.155
	LTE Band 13	10M	QPSK	25RB	0Offset	Edge 2	0mm	OFF	23230	782	21.37	23.00	1.455	0.11	0.090	0.131



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	10mm	OFF	20600	844	22.27	24.00	1.489	0.03	0.449	0.669
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Face	10mm	OFF	20600	844	21.25	23.00	1.496	-0.03	0.400	0.598
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	0mm	ON	20600	844	21.27	22.00	1.183	-0.04	0.943	1.116
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	0mm	ON	20450	829	21.14	22.00	1.219	0.01	0.865	1.054
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	0mm	ON	20525	836.5	21.22	22.00	1.197	0.08	0.943	1.129
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Face	0mm	ON	20600	844	21.26	22.00	1.186	-0.07	0.950	1.126
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Face	0mm	ON	20450	829	21.25	22.00	1.189	0.07	0.930	1.105
11	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Face	0mm	ON	20525	836.5	21.21	22.00	1.199	-0.03	0.979	1.174
	LTE Band 5	10M	QPSK	50RB	0Offset	Bottom Face	0mm	ON	20600	844	20.94	22.00	1.276	-0.1	0.905	1.155
	LTE Band 5	10M	QPSK	1RB	0Offset	Edge 1	0mm	OFF	20600	844	22.27	24.00	1.489	0.16	0.022	0.033
	LTE Band 5	10M	QPSK	25RB	0Offset	Edge 1	0mm	OFF	20600	844	21.25	23.00	1.496	0.12	0.017	0.025
	LTE Band 5	10M	QPSK	1RB	0Offset	Edge 2	0mm	OFF	20600	844	22.27	24.00	1.489	-0.01	0.110	0.164
	LTE Band 5	10M	QPSK	25RB	0Offset	Edge 2	0mm	OFF	20600	844	21.25	23.00	1.496	0.13	0.088	0.132
12	LTE Band 4	20M	QPSK	1RB	0offset	Bottom Face	0mm	OFF	20300	1745	22.50	24.00	1.413	0	0.606	0.856
	LTE Band 4	20M	QPSK	1RB	0offset	Bottom Face	0mm	OFF	20050	1720	22.46	24.00	1.426	-0.03	0.548	0.781
	LTE Band 4	20M	QPSK	1RB	0offset	Bottom Face	0mm	OFF	20175	1732.5	22.44	24.00	1.432	-0.06	0.568	0.813
	LTE Band 4	20M	QPSK	50RB	0offset	Bottom Face	0mm	OFF	20300	1745	21.31	23.00	1.476	-0.07	0.481	0.710
	LTE Band 4	20M	QPSK	100RB	0offset	Bottom Face	0mm	OFF	20300	1745	21.19	23.00	1.517	0.01	0.465	0.705
	LTE Band 4	20M	QPSK	1RB	0offset	Edge 1	0mm	OFF	20300	1745	22.50	24.00	1.413	0.14	0.046	0.065
	LTE Band 4	20M	QPSK	50RB	0offset	Edge 1	0mm	OFF	20300	1745	21.31	23.00	1.476	0.06	0.037	0.055
	LTE Band 4	20M	QPSK	1RB	0offset	Edge 2	0mm	OFF	20300	1745	22.50	24.00	1.413	0.07	0.101	0.143
	LTE Band 4	20M	QPSK	50RB	0offset	Edge 2	0mm	OFF	20300	1745	21.31	23.00	1.476	0.03	0.080	0.118
	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Face	0mm	OFF	26590	1905	22.74	24.00	1.337	0.01	0.748	1.000
	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Face	0mm	OFF	26140	1860	22.56	24.00	1.393	-0.04	0.784	1.092
13	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Face	0mm	OFF	26340	1880	22.49	24.00	1.416	0	0.792	1.121
	LTE Band 25	20M	QPSK	50RB	0offset	Bottom Face	0mm	OFF	26590	1905	21.48	23.00	1.419	-0.14	0.551	0.782
	LTE Band 25	20M	QPSK	100RB	0offset	Bottom Face	0mm	OFF	26590	1905	21.52	23.00	1.406	-0.02	0.558	0.785
	LTE Band 25	20M	QPSK	1RB	0offset	Edge 1	0mm	OFF	26590	1905	22.74	24.00	1.337	0.04	0.062	0.083
	LTE Band 25	20M	QPSK	50RB	0offset	Edge 1	0mm	OFF	26590	1905	21.48	23.00	1.419	0	0.045	0.064
	LTE Band 25	20M	QPSK	1RB	0offset	Edge 2	0mm	OFF	26590	1905	22.74	24.00	1.337	0.01	0.145	0.194
	LTE Band 25	20M	QPSK	50RB	0offset	Edge 2	0mm	OFF	26590	1905	21.48	23.00	1.419	0.03	0.116	0.165

14.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	384	836.52	21.54	22.00	1.112	-0.01	1.060	-	1.178
2nd	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	384	836.52	21.54	22.00	1.112	0.05	1.040	1.02	1.156

General Note:

- Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
- Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Tablet
		Body
1.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes
2.	WCDMA(Data) + WLAN2.4GHz(data)	Yes
3.	CDMA(Data) + WLAN2.4GHz(data)	Yes
4.	LTE(Data) + WLAN2.4GHz(data)	Yes
5.	GPRS/EDGE(Data) + Bluetooth(data)	Yes
6.	WCDMA(Data) + Bluetooth(data)	Yes
7.	CDMA(Data) + Bluetooth(data)	Yes
8.	LTE(Data) + Bluetooth(data)	Yes
9.	GPRS/EDGE(data) + WLAN5GHz(data)	Yes
10.	WCDMA(data) + WLAN5GHz(data)	Yes
11.	CDMA(data) + WLAN5 GHz(data)	Yes
12.	LTE(data) + WLAN5GHz(data)	Yes

General Note:

1. The WLAN/BT module, Brand Name: Intel, Model Name: 7265NGW, FCC ID: QYL7265NG is also integrated into this host and the WLAN SAR testing results are also used perform transmission simultaneous analysis which can be referred to Sporton SAR Test Report, Report No: FA570164-02.
2. For simultaneous transmission analysis for exposure position of bottom face 10mm, WLAN SAR tested at 0mm separation is worse and the test data is used for conservative SAR summation.
3. For co-location analysis:
 - i) For WWAN SAR testing was performed on bottom face, Edge1 and Edge2, according to KDB 447498 D01v05r02 exclusion thresholds which can be referred to page44.
 - ii) The WLAN SAR testing was performed on bottom face and Edge1, according to KDB 447498 D01v05r02 exclusion thresholds which can be referred to Sporton FCC SAR Report, FCC ID: QYL7265NG, Report No: FA5710164-02 page30.
 - iii) For co-location analysis was performed at the same exposure positions, which are bottom face and Edge1, where both WWAN standalone SAR and WLAN standalone SAR was assessed.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.2.



15.1 Body Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
			WWAN	2.4GHz / 5.8GHz WLAN Ant A	2.4GHz / 5.8GHz WLAN Ant B					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Bottom Face at 10mm	0.785	0.209	0.428	0.99	1.21			
		Bottom Face at 0mm	1.045	0.209	0.428	1.25	1.47			
		Edge 1 at 0mm	0.036		0.278	0.04	0.31			
		Edge 2 at 0mm	0.148			0.15	0.15			
	GSM1900	Bottom Face at 0mm	0.978	0.209	0.428	1.19	1.41			
		Edge 1 at 0mm	0.079		0.278	0.08	0.36			
WCDMA	WCDMA V	Bottom Face at 10mm	0.658	0.209	0.428	0.87	1.09			
		Bottom Face at 0mm	1.147	0.209	0.428	1.36	1.58			
		Edge 1 at 0mm	0.036		0.278	0.04	0.31			
		Edge 2 at 0mm	0.149			0.15	0.15			
	WCDMA IV	Bottom Face at 0mm	0.938	0.209	0.428	1.15	1.37			
		Edge 1 at 0mm	0.084		0.278	0.08	0.36			
		Edge 2 at 0mm	0.253			0.25	0.25			
	WCDMA II	Bottom Face at 0mm	1.100	0.209	0.428	1.31	1.53			
		Edge 1 at 0mm	0.088		0.278	0.09	0.37			
		Edge 2 at 0mm	0.219			0.22	0.22			
	CDMA	CDMA2000 BC10	Bottom Face at 10mm	0.669	0.209	0.428	0.88	1.10		
			Bottom Face at 0mm	1.185	0.209	0.428	1.39	1.61	0.02	Case 1
Edge 1 at 0mm			0.054		0.278	0.05	0.33			
Edge 2 at 0mm			0.206			0.21	0.21			
CDMA2000 BC0		Bottom Face at 10mm	0.600	0.209	0.428	0.81	1.03			
		Bottom Face at 0mm	1.189	0.209	0.428	1.40	1.62	0.02	Case 2	
		Edge 1 at 0mm	0.048		0.278	0.05	0.33			
		Edge 2 at 0mm	0.134			0.13	0.13			
CDMA2000 BC1		Bottom Face at 10mm	0.376	0.209	0.428	0.59	0.80			
		Bottom Face at 0mm	1.004	0.209	0.428	1.21	1.43			
		Edge 1 at 0mm	0.116		0.278	0.12	0.39			
		Edge 2 at 0mm	0.260			0.26	0.26			
LTE	LTE Band 17	Bottom Face at 0mm	0.776	0.209	0.428	0.99	1.20			
		Edge 1 at 0mm	0.023		0.278	0.02	0.30			
		Edge 2 at 0mm	0.093			0.09	0.09			
	LTE Band 13	Bottom Face at 10mm	0.589	0.209	0.428	0.80	1.02			
		Bottom Face at 0mm	1.001	0.209	0.428	1.21	1.43			
		Edge 1 at 0mm	0.048		0.278	0.05	0.33			
		Edge 2 at 0mm	0.155			0.16	0.16			
	LTE Band 5	Bottom Face at 10mm	0.669	0.209	0.428	0.88	1.10			
		Bottom Face at 0mm	1.174	0.209	0.428	1.38	1.60	0.02	Case 3	
		Edge 1 at 0mm	0.033		0.278	0.03	0.31			
		Edge 2 at 0mm	0.164			0.16	0.16			
	LTE Band 4	Bottom Face at 0mm	0.856	0.209	0.428	1.07	1.28			
		Edge 1 at 0mm	0.065		0.278	0.07	0.34			
		Edge 2 at 0mm	0.143			0.14	0.14			
	LTE Band 25	Bottom Face at 0mm	1.121	0.209	0.428	1.33	1.55			
		Edge 1 at 0mm	0.083		0.278	0.08	0.36			
		Edge 2 at 0mm	0.194			0.19	0.19			



WWAN Band		Exposure Position	1	4	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No	
			WWAN 1g SAR (W/kg)	2.4GHz Bluetooth Estimated 1g SAR (W/kg)				
GSM	GSM850	Bottom Face at 10mm	0.785	0.126	0.91			
		Bottom Face at 0mm	1.045	0.126	1.17			
		Edge 1 at 0mm	0.036	0.126	0.16			
		Edge 2 at 0mm	0.148	0.126	0.27			
	GSM1900	Bottom Face at 0mm	0.978	0.126	1.10			
		Edge 1 at 0mm	0.079	0.126	0.21			
WCDMA	WCDMA V	Bottom Face at 10mm	0.658	0.126	0.78			
		Bottom Face at 0mm	1.147	0.126	1.27			
		Edge 1 at 0mm	0.036	0.126	0.16			
		Edge 2 at 0mm	0.149	0.126	0.28			
	WCDMA IV	Bottom Face at 0mm	0.938	0.126	1.06			
		Edge 1 at 0mm	0.084	0.126	0.21			
		Edge 2 at 0mm	0.253	0.126	0.38			
	WCDMA II	Bottom Face at 0mm	1.100	0.126	1.23			
		Edge 1 at 0mm	0.088	0.126	0.21			
		Edge 2 at 0mm	0.219	0.126	0.35			
	CDMA	CDMA2000 BC10	Bottom Face at 10mm	0.669	0.126	0.80		
			Bottom Face at 0mm	1.185	0.126	1.31		
Edge 1 at 0mm			0.054	0.126	0.18			
Edge 2 at 0mm			0.206	0.126	0.33			
CDMA2000 BC0		Bottom Face at 10mm	0.600	0.126	0.73			
		Bottom Face at 0mm	1.189	0.126	1.32			
		Edge 1 at 0mm	0.048	0.126	0.17			
		Edge 2 at 0mm	0.134	0.126	0.26			
CDMA2000 BC1		Bottom Face at 10mm	0.376	0.126	0.50			
		Bottom Face at 0mm	1.004	0.126	1.13			
		Edge 1 at 0mm	0.116	0.126	0.24			
		Edge 2 at 0mm	0.260	0.126	0.39			
LTE	LTE Band 17	Bottom Face at 0mm	0.776	0.126	0.90			
		Edge 1 at 0mm	0.023	0.126	0.15			
		Edge 2 at 0mm	0.093	0.126	0.22			
	LTE Band 13	Bottom Face at 10mm	0.589	0.126	0.72			
		Bottom Face at 0mm	1.001	0.126	1.13			
		Edge 1 at 0mm	0.048	0.126	0.17			
		Edge 2 at 0mm	0.155	0.126	0.28			
	LTE Band 5	Bottom Face at 10mm	0.669	0.126	0.80			
		Bottom Face at 0mm	1.174	0.126	1.30			
		Edge 1 at 0mm	0.033	0.126	0.16			
		Edge 2 at 0mm	0.164	0.126	0.29			
	LTE Band 4	Bottom Face at 0mm	0.856	0.126	0.98			
		Edge 1 at 0mm	0.065	0.126	0.19			
		Edge 2 at 0mm	0.143	0.126	0.27			
	LTE Band 25	Bottom Face at 0mm	1.121	0.126	1.25			
Edge 1 at 0mm		0.083	0.126	0.21				
Edge 2 at 0mm		0.194	0.126	0.32				




WWAN Band		Exposure Position	1	5	6	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.3GHz / 5.5GHz WLAN Ant A	5.2GHz / 5.3GHz / 5.5GHz WLAN Ant B				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Bottom Face at 10mm	0.785	0.210	0.544	1.00	1.33		
		Bottom Face at 0mm	1.045	0.210	0.544	1.26	1.59		
		Edge 1 at 0mm	0.036		0.213	0.04	0.25		
		Edge 2 at 0mm	0.148			0.15	0.15		
	GSM1900	Bottom Face at 0mm	0.978	0.210	0.544	1.19	1.52		
		Edge 1 at 0mm	0.079		0.213	0.08	0.29		
	Edge 2 at 0mm	0.167			0.17	0.17			
WCDMA	WCDMA V	Bottom Face at 10mm	0.658	0.210	0.544	0.87	1.20		
		Bottom Face at 0mm	1.147	0.210	0.544	1.36	1.69	0.02	Case 4
		Edge 1 at 0mm	0.036		0.213	0.04	0.25		
		Edge 2 at 0mm	0.149			0.15	0.15		
	WCDMA IV	Bottom Face at 0mm	0.938	0.210	0.544	1.15	1.48		
		Edge 1 at 0mm	0.084		0.213	0.08	0.30		
		Edge 2 at 0mm	0.253			0.25	0.25		
	WCDMA II	Bottom Face at 0mm	1.100	0.210	0.544	1.31	1.64	0.02	Case 5
		Edge 1 at 0mm	0.088		0.213	0.09	0.30		
		Edge 2 at 0mm	0.219			0.22	0.22		
CDMA	CDMA2000 BC10	Bottom Face at 10mm	0.669	0.210	0.544	0.88	1.21		
		Bottom Face at 0mm	1.185	0.210	0.544	1.40	1.73	0.02	Case 6
		Edge 1 at 0mm	0.054		0.213	0.05	0.27		
		Edge 2 at 0mm	0.206			0.21	0.21		
	CDMA2000 BC0	Bottom Face at 10mm	0.600	0.210	0.544	0.81	1.14		
		Bottom Face at 0mm	1.189	0.210	0.544	1.40	1.73	0.02	Case 7
		Edge 1 at 0mm	0.048		0.213	0.05	0.26		
		Edge 2 at 0mm	0.134			0.13	0.13		
	CDMA2000 BC1	Bottom Face at 10mm	0.376	0.210	0.544	0.59	0.92		
		Bottom Face at 0mm	1.004	0.210	0.544	1.21	1.55		
		Edge 1 at 0mm	0.116		0.213	0.12	0.33		
		Edge 2 at 0mm	0.260			0.26	0.26		
LTE	LTE Band 17	Bottom Face at 0mm	0.776	0.210	0.544	0.99	1.32		
		Edge 1 at 0mm	0.023		0.213	0.02	0.24		
		Edge 2 at 0mm	0.093			0.09	0.09		
	LTE Band 13	Bottom Face at 10mm	0.589	0.210	0.544	0.80	1.13		
		Bottom Face at 0mm	1.001	0.210	0.544	1.21	1.55		
		Edge 1 at 0mm	0.048		0.213	0.05	0.26		
		Edge 2 at 0mm	0.155			0.16	0.16		
	LTE Band 5	Bottom Face at 10mm	0.669	0.210	0.544	0.88	1.21		
		Bottom Face at 0mm	1.174	0.210	0.544	1.38	1.72	0.02	Case 8
		Edge 1 at 0mm	0.033		0.213	0.03	0.25		
		Edge 2 at 0mm	0.164			0.16	0.16		
	LTE Band 4	Bottom Face at 0mm	0.856	0.210	0.544	1.07	1.40		
		Edge 1 at 0mm	0.065		0.213	0.07	0.28		
		Edge 2 at 0mm	0.143			0.14	0.14		
	LTE Band 25	Bottom Face at 0mm	1.121	0.210	0.544	1.33	1.67	0.02	Case 9
		Edge 1 at 0mm	0.083		0.213	0.08	0.30		
		Edge 2 at 0mm	0.194			0.19	0.19		

15.2 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC10				X	Y	Z				
	WLAN	Bottom Face	1.185	0	0.054	0.083	-0.181	131.2	1.61	0.02	Not required
	WLAN		0.428	0	0.107	-0.037	-0.185				

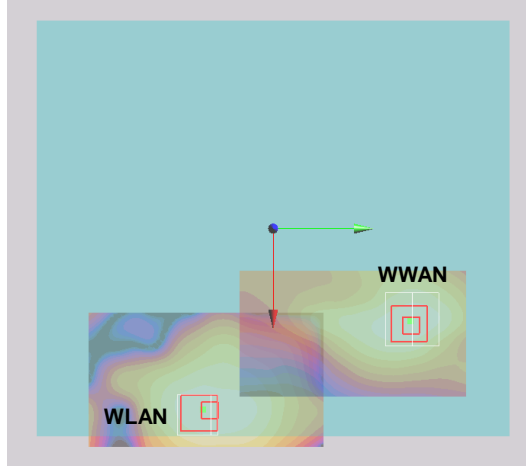


Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC0				X	Y	Z				
	WLAN	Bottom Face	1.189	0	0.054	0.08	-0.182	128.5	1.62	0.02	Not required
	WLAN		0.428	0	0.107	-0.037	-0.185				

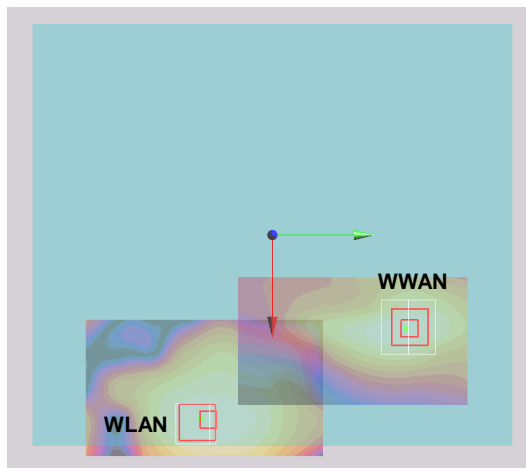


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 5				WLAN	X	Y				
	LTE Band 5	Bottom Face	1.174	0	0.054	0.0815	-0.182	129.8	1.60	0.02	Not required
	WLAN		0.428	0	0.107	-0.037	-0.185				

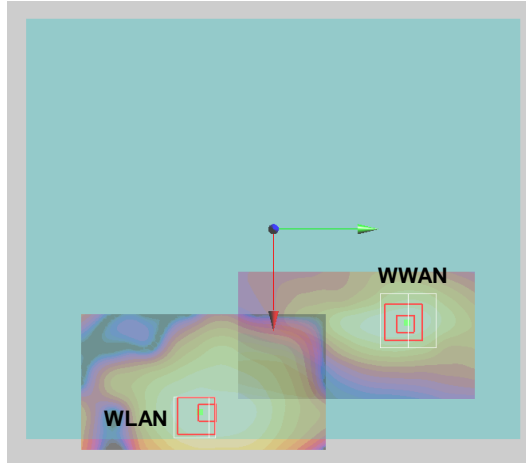


Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				WLAN	X	Y				
	WCDMA V	Bottom Face	1.147	0	0.0525	0.08	-0.182	134.4	1.69	0.02	Not required
	WLAN		0.544	0	0.115	-0.039	-0.185				

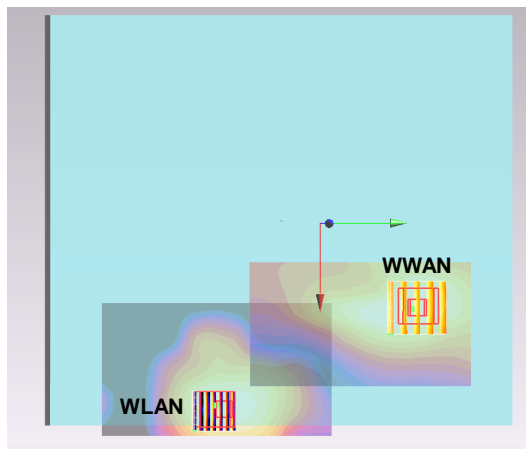


Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WLAN <td rowspan="2">Bottom Face</td> <td>1.1</td> <td>0</td> <td>0.062</td> <td>0.09</td> <td>-0.181</td> <td rowspan="2">139.5</td> <td rowspan="2">1.64</td> <td rowspan="2">0.02</td> <td rowspan="2">Not required</td>	Bottom Face	1.1	0	0.062	0.09	-0.181	139.5	1.64	0.02	Not required
	WLAN <td>0.544</td> <td>0</td> <td>0.115</td> <td>-0.039</td> <td>-0.185</td>		0.544	0	0.115	-0.039	-0.185				

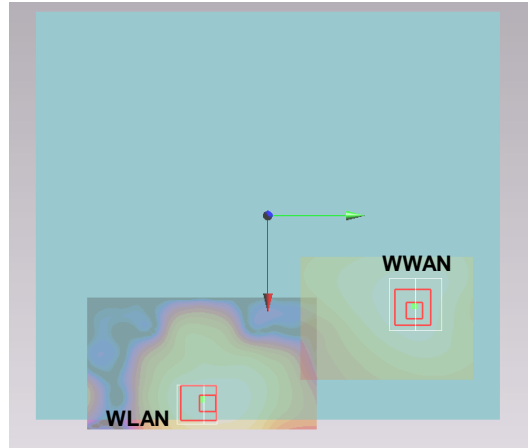


Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC10				X	Y	Z				
	CDMA BC10	Bottom Face	1.185	0	0.054	0.083	-0.181	136.5	1.73	0.02	Not required
	WLAN		0.544	0	0.115	-0.039	-0.185				

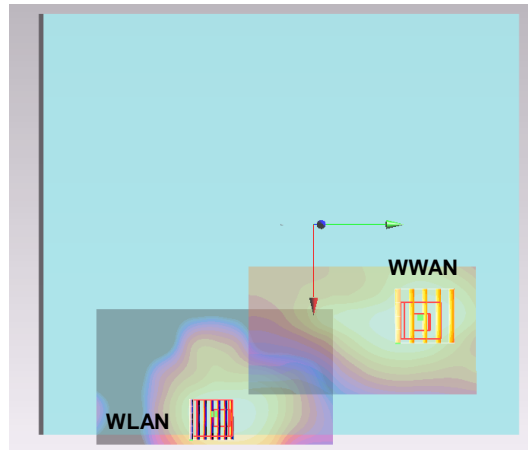


Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC0				WLAN	X	Y				
	CDMA BC0	Bottom Face	1.189	0	0.054	0.08	-0.182	133.8	1.73	0.02	Not required
	WLAN		0.544	0	0.115	-0.039	-0.185				

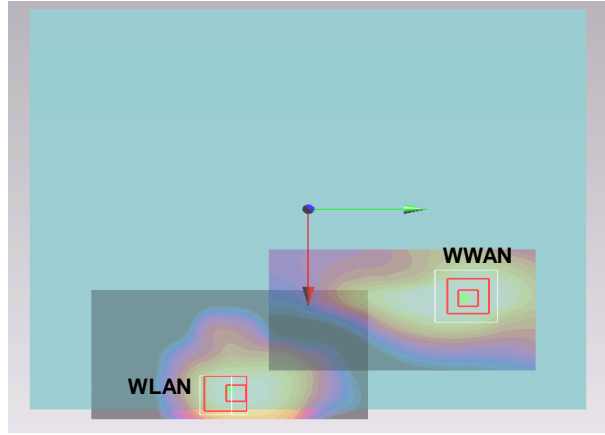

Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 5				WLAN	X	Y				
	LTE Band 5	Bottom Face	1.174	0	0.057	0.08	-0.181	132.4	1.72	0.02	Not required
	WLAN		0.544	0	0.115	-0.039	-0.185				

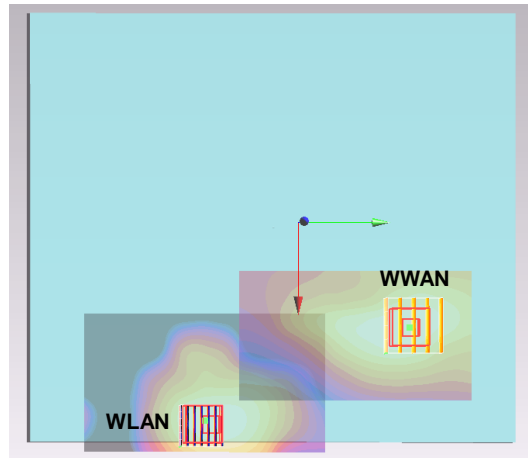

Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 25	Bottom Face	1.121	0	0.062	0.09	-0.18	139.6	1.67	0.02	Not required
	WLAN		0.544	0	0.115	-0.039	-0.185				

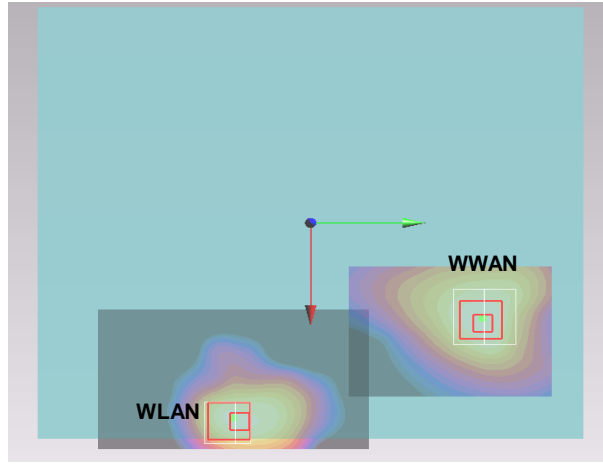

Test Engineer : Frank Wu, Vic Yang, Galen Zhang and Angelo Chang

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



17. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v05r02, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Feb 2014
- [6] FCC KDB 941225 D01 v03, “3G SAR MEAUREMENT PROCEDURES”, Oct 2014
- [7] FCC KDB 941225 D05 v02r03, “SAR Evaluation Considerations for LTE Devices”, Dec 2013
- [8] FCC KDB 616217 D04 v01r01, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, May 2013
- [9] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [10] FCC KDB 865664 D02 v01r01, “RF Exposure Compliance Reporting and Documentation Considerations” May 2013.



Appendix A. Plots of System Performance Check

The plots are shown as follows.



Appendix B. Plots of SAR Measurement

The plots are shown as follows.



Appendix C. DAS Y Calibration Certificate

The DAS Y calibration certificates are shown as follows.