



# HAC T-Coil TEST REPORT

No. I17N00032-HAC T-coil

For

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd**

**Smart phone**

**Model Name: Coolpad3632A**

With

**Hardware Version: P2**

**Software Version: 7.0.013.00.P0.161201.3632A.tmo**

**FCC ID: R38YL3632A**

**Results Summary: T Category = T3**

**Issued Date: 2017-02-19**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:[cttl\\_terminals@catr.cn](mailto:cttl_terminals@catr.cn), website:[www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Issue Date</b>	<b>Description</b>
I17N00032-HAC T-coil	Rev.0	2017-02-19	Initial creation of test report

## TABLE OF CONTENT

<b>1 TEST LABORATORY .....</b>	<b>4</b>
1.1 TESTING LOCATION .....	4
1.2 TESTING ENVIRONMENT.....	4
1.3 PROJECT DATA .....	4
1.4 SIGNATURE.....	4
<b>2 CLIENT INFORMATION .....</b>	<b>5</b>
2.1 APPLICANT INFORMATION .....	5
2.2 MANUFACTURER INFORMATION .....	5
<b>3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
3.1 ABOUT EUT .....	6
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	6
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	6
3.4 AIR INTERFACES / BANDS INDICATING OPERATING MODES .....	6
<b>4 CONDUCTED OUTPUT POWER MEASUREMENT .....</b>	<b>7</b>
4.1 SUMMARY .....	7
4.2 CONDUCTED POWER .....	7
<b>5. REFERENCE DOCUMENTS .....</b>	<b>7</b>
<b>6 OPERATIONAL CONDITIONS DURING TEST .....</b>	<b>8</b>
6.1 HAC MEASUREMENT SET-UP.....	8
6.2 AM1D PROBE.....	9
6.3 AMCC .....	10
6.4 AMML.....	10
6.5 TEST ARCH PHANTOM & PHONE POSITIONER.....	10
6.6 ROBOTIC SYSTEM SPECIFICATIONS .....	11
6.7 T-COIL MEASUREMENT POINTS AND REFERENCE PLANE .....	11
<b>7 T-COIL TEST PROCEDURES .....</b>	<b>13</b>
<b>8 T-COIL PERFORMANCE REQUIREMENTS .....</b>	<b>14</b>
8.1 T-COIL COUPLING FIELD INTENSITY.....	14
8.2 FREQUENCY RESPONSE.....	14
<b>9 HAC T-COIL TEST DATA SUMMARY.....</b>	<b>15</b>
9.1 NOISE AMBIENT.....	15
9.2 T-COIL COUPLING FIELD INTENSITY .....	15
9.2.1 TRANSVERSE FIELD INTENSITY .....	15
9.2.2 PERPENDICULAR FIELD INTENSITY.....	15
9.3 FREQUENCY RESPONSE AT PERPENDICULAR MEASUREMENT POINT .....	16
9.4 SIGNAL QUALITY .....	16
9.5 TOTAL MEASUREMENT CONCLUSION .....	16
<b>10 MEASUREMENT UNCERTAINTY .....</b>	<b>17</b>
<b>11 MAIN TEST INSTRUMENTS .....</b>	<b>18</b>
<b>ANNEX A TEST LAYOUT .....</b>	<b>19</b>
<b>ANNEX B TEST PLOTS .....</b>	<b>20</b>
<b>ANNEX C FREQUENCY RESPONSE CURVES.....</b>	<b>40</b>
<b>ANNEX D PROBE CALIBRATION CERTIFICATE.....</b>	<b>43</b>



## 1 Test Laboratory

### 1.1 Testing Location

Company Name:	CTTL(Shenzhen)
Address:	Multimedia Building, TCL International E City, Zhongshan Road, Nanshan District, Shenzhen, P. R. China

### 1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 4 Ω
Ambient noise & Reflection:	< 0.012 W/kg

### 1.3 Project Data

Project Leader:	Zhang Yunzhuan
Test Engineer:	Wang Fen
Testing Start Date:	February 10, 2017
Testing End Date:	February 10, 2017

### 1.4 Signature

Wang Fen

(Prepared this test report)

Zhang Yunzhuan

(Reviewed this test report)

Cao Junfei -

Director of the laboratory

(Approved this test report)



## 2 Client Information

### 2.1 Applicant Information

Company Name:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post:	Coolpad Information Harbor, High-tech Industrial Park (North), Nanshan District, Shenzhen, P.R.C.
Contact:	wangping
Email:	wangping1@yulong.com
Telephone:	0755-83301199-83335
Fax:	/

### 2.2 Manufacturer Information

Company Name:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post:	Coolpad Information Harbor, High-tech Industrial Park (North), Nanshan District, Shenzhen, P.R.C.
Contact:	wangping
Email:	wangping1@yulong.com
Telephone:	0755-83301199-83335
Fax:	/

### 3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1 About EUT

Description:	Smart phone
Mode Name:	Coolpad 3632A
Operating mode(s):	GSM 850/1900/900/1800, WCDMA 850/1700/1900, LTE_FDD Band 2/4/5/12, BT, Wi-Fi 2.4G

#### 3.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	862006030007045	P2	7.0.013.00.P0.161201.3632A.tmo
EUT2	862006030009256	P2	7.0.013.00.P0.161201.3632A.tmo

\*EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test HAC with the EUT1 and conducted power with the EUT2.

#### 3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CPLD-417	CPLD41716424000001	Zhuhai COSLIGHT Battery CO., Ltd.
AE2	Battery	CPLD-417	CPLD41716424000001	Tianjin Lishen Battery Joint-Stock Co.,Ltd.

\*AE ID: is used to identify the test sample in the lab internally.

#### 3.4 Air Interfaces / Bands Indicating Operating Modes

Air-interface	Band(MHz)	Type	C63.19/tested	Simultaneous Transmissions	OTT	Power Reduction		
GSM	850	VO	Yes	BT,WLAN	NA	NA		
	1900							
GPRS/EDGE	850	DT	NA			BT,WLAN	NA	No
	1900							
WCDMA (UMTS)	850	VO	Yes	BT,WLAN	NA			NA
	1700							
	1900							
	HSPA	DT	NA			BT,WLAN	NA	NA
LTE	1900	VD	NA	BT,WLAN	NA			
	1800							
	700							
	850							
BT	2450	DT	NA	GSM, WCDMA,LTE	NA	NA		
WLAN	2450	DT	NA	GSM, WCDMA,LTE	NA	NA		

VO: Voice CMRS/PSTN Service Only

V/D: Voice CMRS/PSTN and Data Service



DT: Digital Transport

\* HAC Rating was not based on concurrent voice and data modes, Non-current mode was found to represent worst case rating for both M and T rating

## 4 CONDUCTED OUTPUT POWER MEASUREMENT

### 4.1 Summary

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured output power should be greater and within 5% than EMI measurement.

### 4.2 Conducted Power

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
32.54	32.93	32.80	
GSM 1900MHz	Conducted Power(dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
29.62	30.08	30.48	
WCDMA 850MHz	Conducted Power (dBm)		
	Channel 4233(846.6MHz)	Channel 4182(836.4MHz)	Channel 4132(826.4MHz)
23.84	23.86	23.93	
WCDMA 1700MHz	Conducted Power (dBm)		
	Channel 1513(1752.6MHz)	Channel 1412(1732.4MHz)	Channel 1312(1712.4MHz)
24.86	24.77	24.88	
WCDMA 1900MHz	Conducted Power (dBm)		
	Channel 9538(1907.6MHz)	Channel 9400(1880MHz)	Channel 9262(1852.4MHz)
23.69	23.83	23.78	

## 5. Reference Documents


The following document listed in this section is referred for testing.

Reference	Title	Version
ANSI C63.19-2011	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids	2011 Edition

## 6 OPERATIONAL CONDITIONS DURING TEST

### 6.1 HAC MEASUREMENT SET-UP

These measurements are performed using the DASY5 NEO automated dosimetric assessment system. It is made by Schmid& Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Intel Core2 1.86 GHz computer with Windows XP system and HAC Measurement Software DASY5 NEO, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

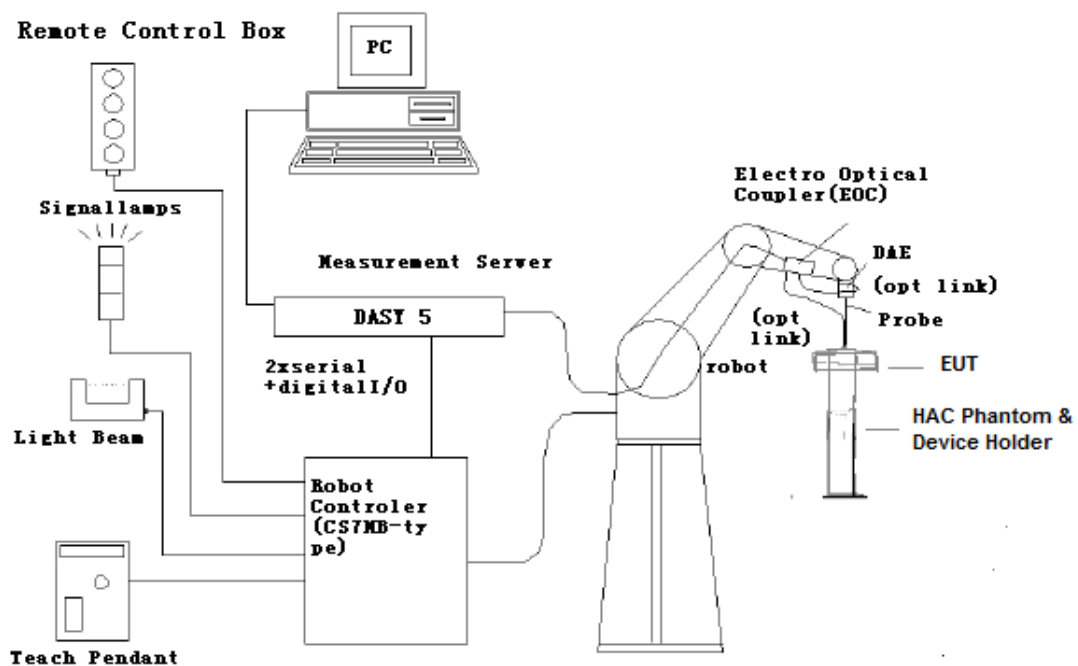

**Figure 6.1 HAC Test Measurement Set-up**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



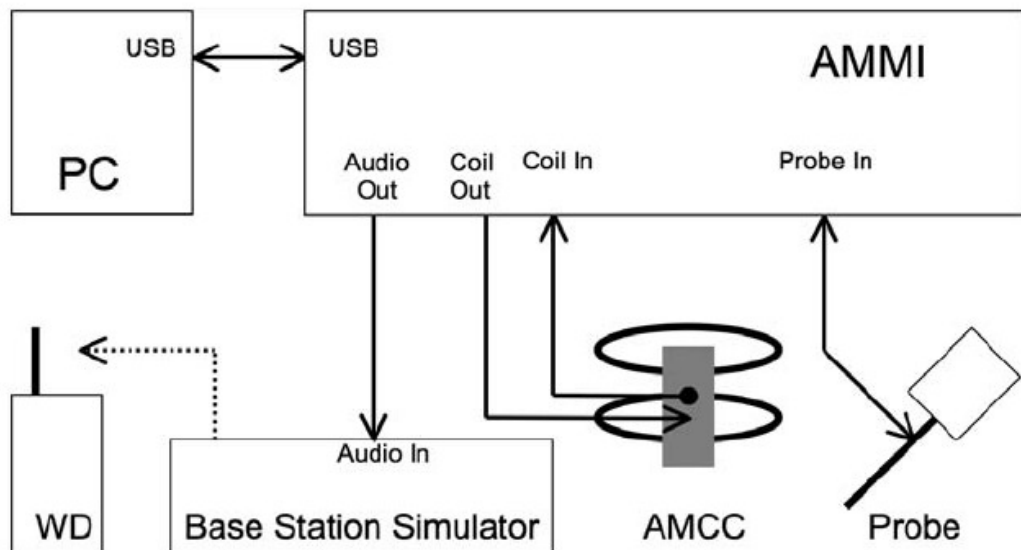


Figure 6.2T-Coil setup with HAC Test Arch and AMCC

## 6.2 AM1D probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V "phantom" voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately

vertical when the signal connector is at the underside of the probe (cable hanging downwards).  
Specification:

<b>Frequency range</b>	0.1~20kHz (RF sensitivity < -100dB, fully RF shielded)
<b>Sensitivity</b>	< -50dB A/m @ 1kHz
<b>Pre-amplifier</b>	40dB, symmetric
<b>Dimensions</b>	Tip diameter/length: 6/290mm, sensor according to ANSI-C63.19

### 6.3 AMCC

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50Ohm, and a shunt resistor of 100Ohm permits monitoring the current with a scale of 1:10

Port description:

Signal	Connector	Resistance
Coil In	BNC	Typically 50Ohm
Coil Monitor	BNO	100Ohm±1% (100mV corresponding to 1 A/m)

Specification:

<b>Dimensions</b>	370 x 370 x 196 mm, according to ANSI-C63.19
-------------------	--

### 6.4 AMMI



**Figure 6.3AMMI front panel**

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.

Specification:

<b>Sampling rate</b>	48 kHz / 24 bit
<b>Dynamic range</b>	85 dB
<b>Test signal generation</b>	User selectable and predefined (vis PC)
<b>Calibration</b>	Auto-calibration / full system calibration using AMCC with monitor output
<b>Dimensions</b>	482 x 65 x 270 mm

### 6.5 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x

370 mm).

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field  $\leq \pm 0.5$  dB.

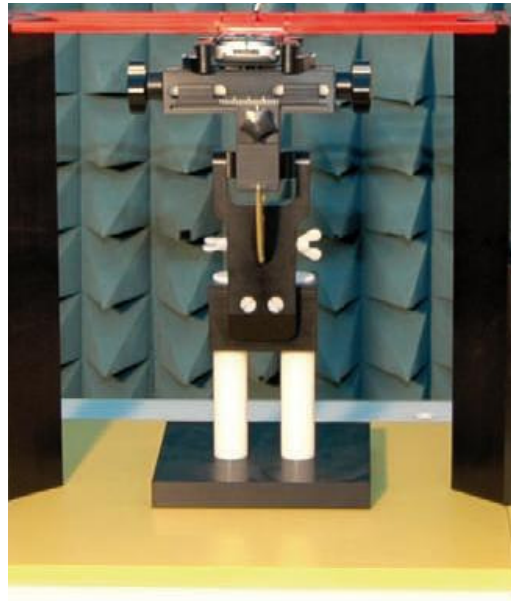


Figure 6.4 HAC Phantom & Device Holder

## 6.6 Robotic System Specifications

### Specifications

**Positioner:** StäubliUnimation Corp. Robot Model: RX160L

**Repeatability:**  $\pm 0.02$  mm

**No. of Axis:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** Intel Core2

**Clock Speed:** 1.86 GHz

**Operating System:** Windows XP

#### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY5 software


**Connecting Lines:** Optical downlink for data and status info.

Optical uplink for commands and clock

## 6.7 T-Coil measurement points and reference plane

Figure 6.5 illustrates the standard probe orientations. Position 1 is the perpendicular orientation of the probe coil; orientation 2 is the transverse orientations. The space between the measurement positions is not fixed. It is recommended that a scan of the WD be done for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

- 1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.
- 2) The measurement plane is parallel to, and 10 mm in front of, the reference plane.
- 3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section (or the center of the hole array); or may be centered on a secondary inductive source. The actual location of the measurement point shall be noted in the test report as the measurement reference point.
- 4) The measurement points may be located where the axial and radial field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the WD and shall be located in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.
- 5) The relative spacing of each measurement orientation is not fixed. The axial and two radial orientations should be chosen to select the optimal position.
- 6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis. The actual location of the measurement point shall be noted in test reports and designated as the measurement reference point.

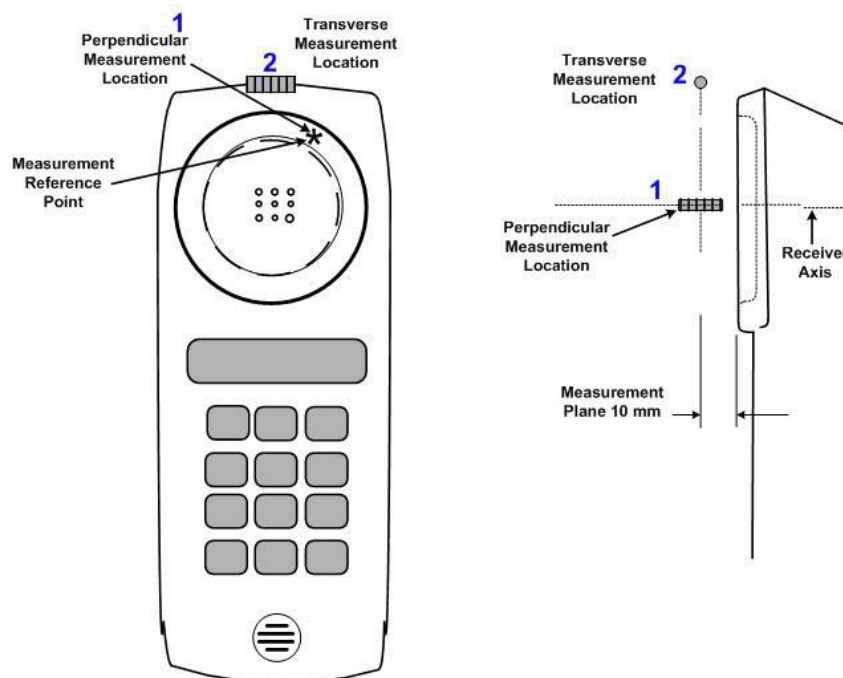

**Figure 6.5 Axis and planes for WD audio frequency magnetic field measurements**

## 7 T-Coil TEST PROCEDURES

**The following illustrate a typical test scan over a wireless communications device:**

- 1) Geometry and signal check: system probe alignment, proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
- 2) Set the reference drive level of signal voice defined in C63.19 per 7.4.2.1.
- 3) The ambient and test system background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the limit.
- 4) The DUT was positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 5) The DUT operation for maximum rated RF output power was configured and connected by using of coaxial cable connection to the base station simulator at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The DUT audio output was positioned tangent (as physically possible) to the measurement plane.
- 6) The DUT's RF emission field was eliminated from T-coil results by using a well RF-shielding of the probe, AM1D, and by using of coaxial cable connection to a Base Station Simulator. One test channel was pre-measurement to avoid this possibility.
- 7) Determined the optimal measurement locations for the DUT by following the three steps, coarse resolution scan, fine resolution scans, and point measurement, as described in C63.19 per 7.4.4.2. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1 and the signal spectrum. The noise measurement was performed after the scan with the signal, the same happened, just with the voice signal switched off. The ABM2 was calculated from this second scan.
- 8) All results resulting from a measurement point in a T-Coil job were calculated from the signal samples during this window interval. ABM values were averaged over the sequence of these samples.
- 9) At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for perpendicular and transverse orientation, and the frequency response was measured for perpendicular.
- 10) Corrected for the frequency response after the DUT measurement since the DASY5 system had known the spectrum of the input signal by using a reference job.
- 11) In SEMCAD post processing, the spectral points are in addition scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.

## 8 T-Coil PERFORMANCE REQUIREMENTS


In order to be rated for T-Coil use, a WD shall meet the requirements for signal level and signal quality contained in this part.

### 8.1 T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be  $\geq -18$  dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.


### 8.2 Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 7.1 and Figure 7.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

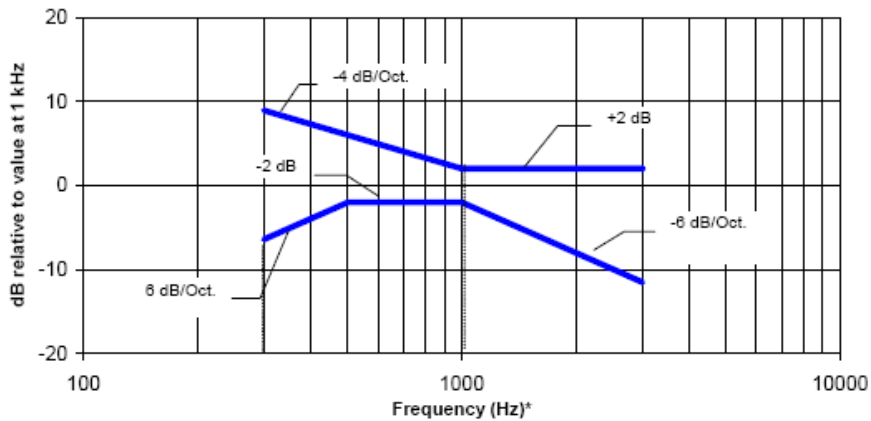

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 8.1—Magnetic field frequency response for WDs with a field  $\leq -15$  dB (A/m) at 1 kHz**

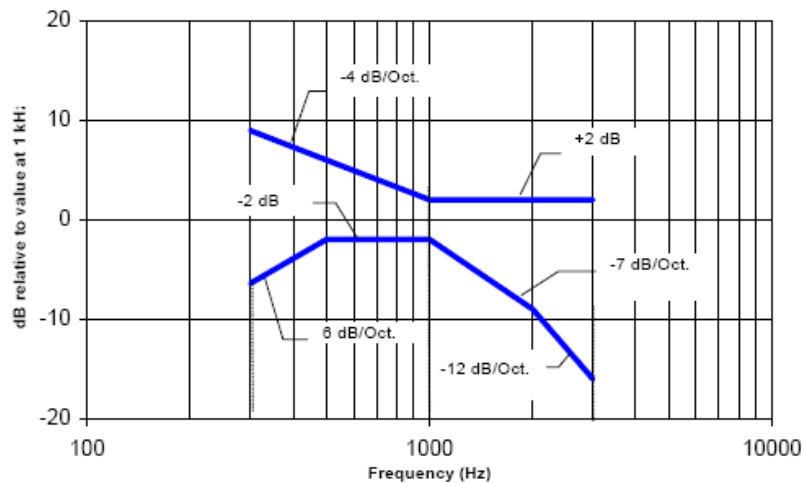

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 8.3 Signal quality

This part provides the signal quality requirement for the intended T-Coil signal from a WD. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criteria that can be measured is the RF immunity in T-Coil mode. This is measured using the same procedure as for the audio coupling mode and at the same levels.

The worst signal quality of the three T-Coil signal measurements shall be used to determine the T-Coil mode category per Table 1

**Table 1: T-Coil signal quality categories**

Category	Telephone parameters WD signal quality [(signal + noise) – to – noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

## 9 HAC T-Coil TEST DATA SUMMARY

### 9.1 Noise ambient

Probe Position	ABM2 (dB A/m)
transverse	-59.63
perpendicular	-60.19

### 9.2 T-Coil Coupling Field Intensity

#### 9.2.1 Transverse Field Intensity

Cell Phone Mode	Minimum limit (dB A/m)	Result (dB A/m)	Verdict
GSM 850	-18	-1.04	Pass
GSM 1900	-18	-1.61	Pass
WCDMA850	-18	5.36	Pass
WCDMA1700	-18	5.74	Pass
WCDMA1900	-18	5.39	Pass

#### 9.2.2 Perpendicular Field Intensity

Cell Phone Mode	Minimum limit (dB A/m)	Result (dB A/m)	Verdict
GSM 850	-18	1.16	Pass
GSM 1900	-18	3.05	Pass
WCDMA850	-18	-2.61	Pass
WCDMA1700	-18	-0.59	Pass
WCDMA1900	-18	0.37	Pass

### 9.3 Frequency Response at Perpendicular Measurement Point

Cell Phone Mode	Frequency Response Curve	Verdict
GSM 850	Figure C.1	Pass
GSM 1900	Figure C.2	Pass
WCDMA850	Figure C.3	Pass
WCDMA1700	Figure C.4	Pass
WCDMA1900	Figure C.5	Pass

### 9.4 Signal Quality

Probe Position	Band	Ch.	Measurement Position (x mm, y mm)	ABM1 (dB A/m)	SNR (dB)	T category
transverse	GSM 850	190	-11, 0	-1.04	22.91	T3
	GSM 1900	661	-12.5,5	-1.61	27.34	T3
	WCDMA850	4182	4,-10	5.36	37.71	T4
	WCDMA1700	1412	4.5,-9.5	5.74	39.37	T4
	WCDMA1900	9400	3,-10	5.39	37.48	T4
perpendicular	GSM 850	190	1.5,8	1.16	32.48	T4
	GSM 1900	661	0.5,4.5	3.05	38.43	T4
	WCDMA850	4182	-4.5,5	-2.61	41.16	T4
	WCDMA1700	1412	0,1	-0.59	41.80	T4
	WCDMA1900	9400	-5,5.5	0.37	43.61	T4

Note: The LCD backlight is turned off, Bluetooth function is turned off and volume is adjusted to maximum level during T-Coil testing. Signal strength measurement scan plots are presented in Annex B.

### 9.5 Total Measurement Conclusion

Probe Position	Frequency Band(MHz)	ABM1	Frequency Response	T Category
transverse	GSM 850	Pass	/	T3
	GSM 1900	Pass		T3
	WCDMA850	Pass		T4
	WCDMA1700	Pass		T4
	WCDMA1900	Pass		T4
perpendicular	GSM 850	Pass	Pass	T4
	GSM 1900	Pass	Pass	T4
	WCDMA850	Pass	Pass	T4
	WCDMA1700	Pass	Pass	T4
	WCDMA1900	Pass	Pass	T4



## 10 MEASUREMENT UNCERTAINTY

No.	Error source	Type	Uncertainty Value $a_i$ (%)	Prob. Dist.	Div.	ABM1 $c_i$	ABM2 $c_i$	Std. Unc. ABM1 $u_i$ (%)	Std. Unc. ABM2 $u_i$ (%)
1	System Repeatability	A	0.016	N	1	1	1	0.016	0.016
<b>Probe Sensitivity</b>									
2	Reference Level	B	3.0	R	$\sqrt{3}$	1	1	3.0	3.0
3	AMCC Geometry	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2
4	AMCC Current	B	0.6	R	$\sqrt{3}$	1	1	0.4	0.4
5	Probe Positioning during Calibration	B	0.1	R	$\sqrt{3}$	1	1	0.1	0.1
6	Noise Contribution	B	0.7	R	$\sqrt{3}$	$\frac{0.014}{3}$	1	0.0	0.4
7	Frequency Slope	B	5.9	R	$\sqrt{3}$	0.1	1	0.3	3.5
<b>Probe System</b>									
8	Repeatability / Drift	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
9	Linearity / Dynamic Range	B	0.6	N	1	1	1	0.4	0.4
10	Acoustic Noise	B	1.0	R	$\sqrt{3}$	0.1	1	0.1	0.6
11	Probe Angle	B	2.3	R	$\sqrt{3}$	1	1	1.4	1.4
12	Spectral Processing	B	0.9	R	$\sqrt{3}$	1	1	0.5	0.5
13	Integration Time	B	0.6	N	1	1	5	0.6	3.0
14	Field Distribution	B	0.2	R	$\sqrt{3}$	1	1	0.1	0.1
<b>Test Signal</b>									
15	Ref.Signal Spectral Response	B	0.6	R	$\sqrt{3}$	0	1	0.0	0.4
<b>Positioning</b>									
16	Probe Positioning	B	1.9	R	$\sqrt{3}$	1	1	1.1	1.1
17	Phantom Thickness	B	0.9	R	$\sqrt{3}$	1	1	0.5	0.5

18	DUT Positioning	B	1.9	R	$\sqrt{3}$	1	1	1.1	1.1
<b>External Contributions</b>									
19	RF Interference	B	0.0	R	$\sqrt{3}$	1	0.3	0.0	0.0
20	Test Signal Variation	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Combined Std. Uncertainty (ABM Field)		$u'_c = \sqrt{\sum_{i=1}^{20} c_i^2 u_i^2}$						4.1	6.1
Expanded Std. Uncertainty		$u_e = 2u_c$		N	$k = 2$			<b>8.2</b>	<b>12.2</b>


## 11 MAIN TEST INSTRUMENTS

**Table 2: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Audio Magnetic 1D Field Probe	AM1DV3	3086	2015-01-22	Three year
02	Audio Magnetic Calibration Coil	AMCC	1105	/	/
03	Audio Measuring Instrument	AMMI	1121	/	/
04	HAC Test Arch	N/A	1150	/	/
05	DAE	DAE4	786	2016-12-08	One year
08	Universal Radio Communication Tester	CMU200	114545	2016-05-19	One year

\*\*\*END OF REPORT BODY\*\*\*

## ANNEX A TEST LAYOUT

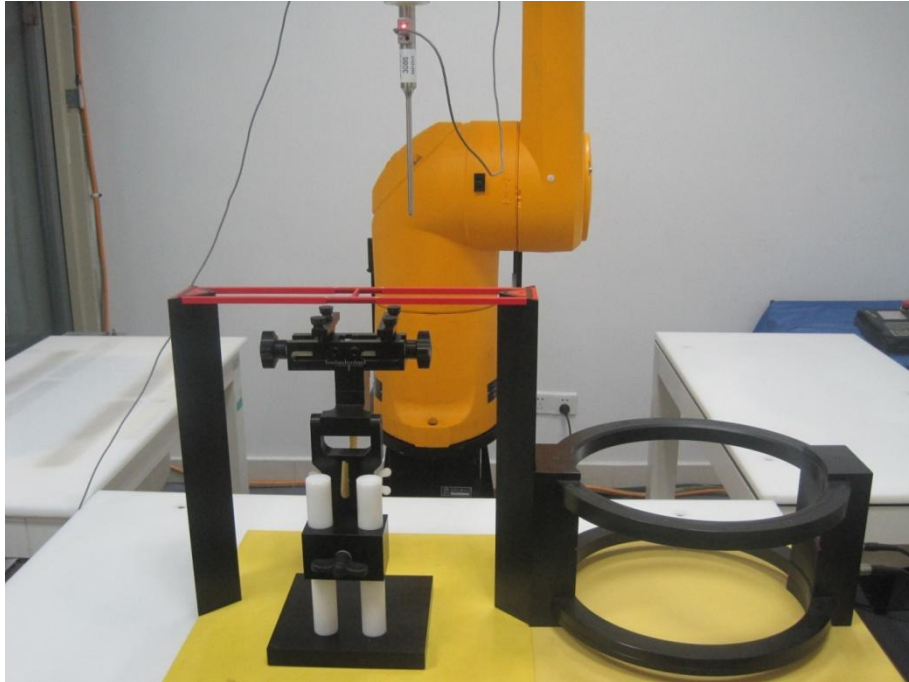

Picture A1: HAC T-Coil System Layout



## ANNEX B TEST PLOTS

### T-Coil GSM 850 Transverse

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: GSM Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: AM1DV3 - 3086

#### T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.13 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1 = 5.59 dBA/m

BWC Factor = 0.13 dB

Location: 5, -10, 3.7 mm

#### T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.13 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 22.91 dB

ABM1 comp = -1.04 dBA/m

BWC Factor = 0.13 dB

Location: -11, 0, 3.7 mm

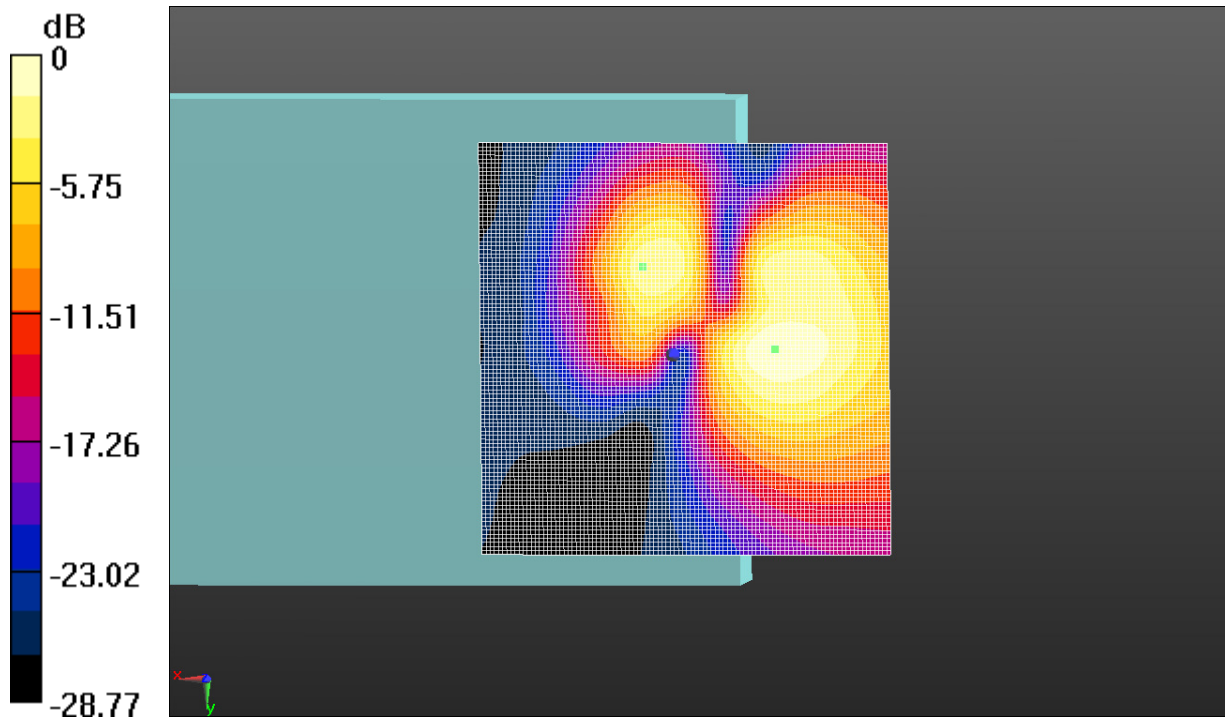

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.1 T-Coil GSM 850**



## **T-Coil GSM 850 Perpendicular**

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: GSM Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: AM1DV3 - 3086

### **T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.13 dB

Device Reference Point: 0, 0, -6.3 mm

#### **Cursor:**

ABM1 = 2.27dBA/m

BWC Factor = 0.13 dB

Location: 4, 5, 3.7 mm

### **T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.13 dB

Device Reference Point: 0, 0, -6.3 mm


#### **Cursor:**

ABM1/ABM2 = 32.48 dB

ABM1 comp = 1.16 dBA/m

BWC Factor = 0.13 dB

Location: 1.5, 8, 3.7 mm

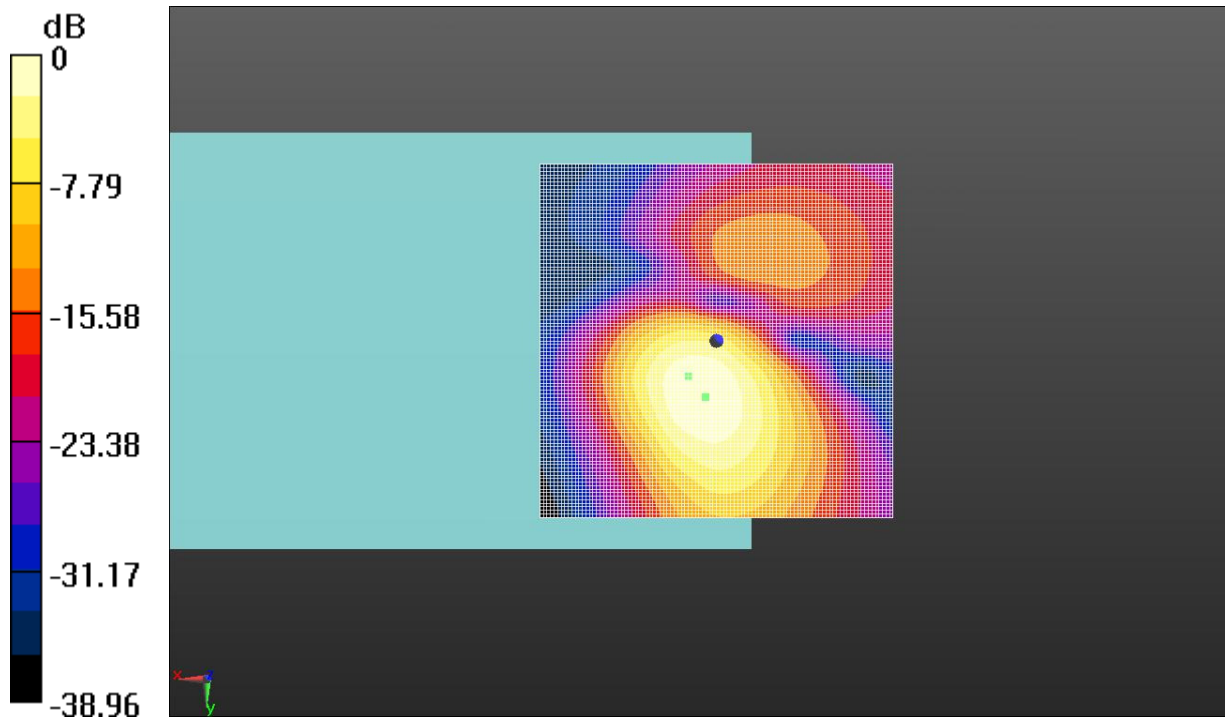

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.2 T-Coil GSM 850**



## T-Coil GSM 1900 Transverse

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: GSM Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: AM1DV3 - 3086

### T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1 = 4.71 dBA/m

BWC Factor = 0.15 dB

Location: 4, -4.5, 3.7 mm

### T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:


ABM1/ABM2 = 27.34 dB

ABM1 comp = -1.61 dBA/m

BWC Factor = 0.15 dB

Location: -12.5, 5, 3.7 mm



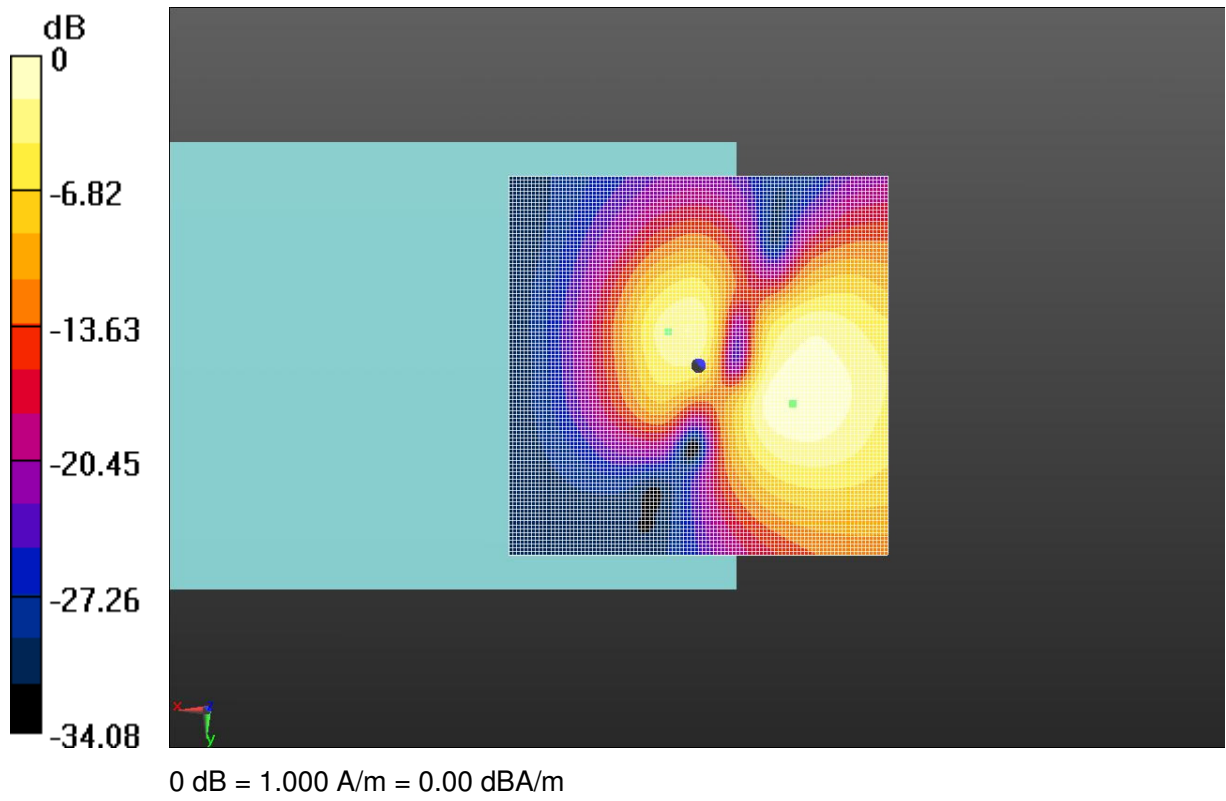

**Fig B.3 T-Coil GSM 1900**



### **T-Coil GSM 1900 Perpendicular**

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: GSM Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: AM1DV3 - 3086

### **T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### **Cursor:**

ABM1 = 3.87 dBA/m

BWC Factor = 0.15 dB

Location: 3, 1.5, 3.7 mm

### **T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm


#### **Cursor:**

ABM1/ABM2 = 38.43 dB

ABM1 comp = 3.05 dBA/m

BWC Factor = 0.15 dB

Location: 0.5, 4.5, 3.7 mm

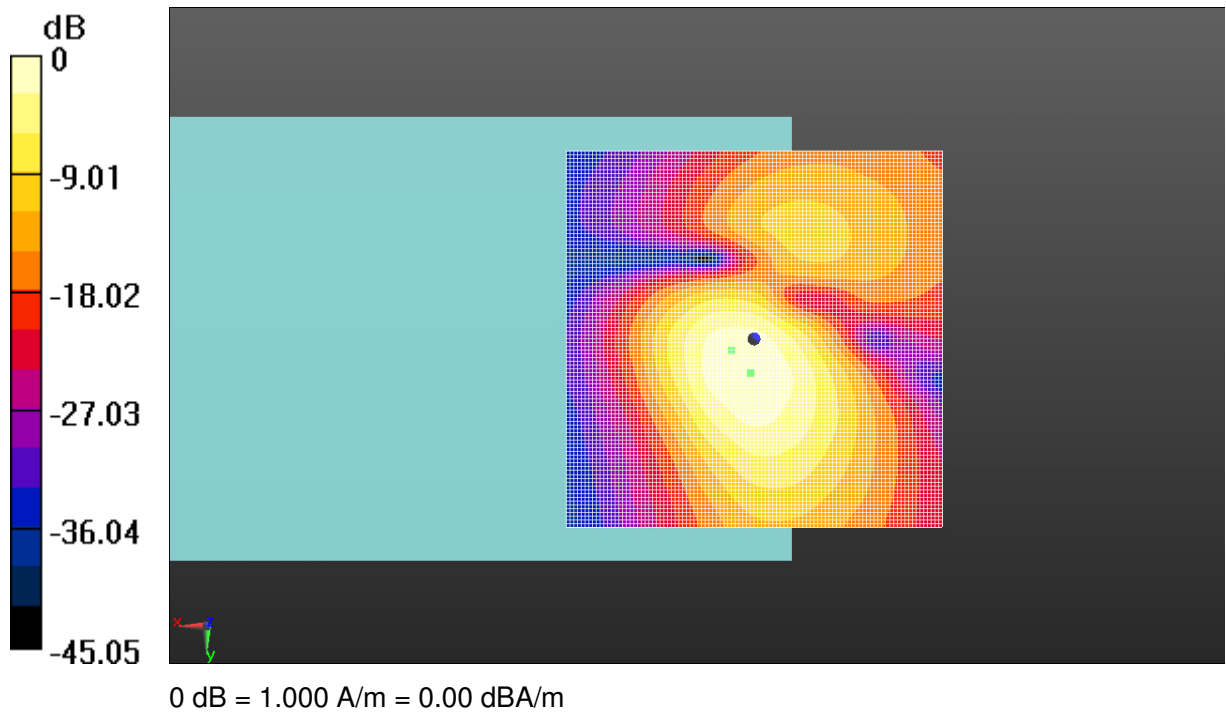

**Fig B.4 T-Coil GSM 1900**



### **T-Coil WCDMA 850 Transverse**

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: WCDMA Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: AM1DV3 - 3086

### **T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.12 dB

Device Reference Point: 0, 0, -6.3 mm

#### **Cursor:**

ABM1 = 5.37 dBA/m

BWC Factor = 0.12 dB

Location: 4.5, -9.5, 3.7 mm

### **T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.12 dB

Device Reference Point: 0, 0, -6.3 mm


#### **Cursor:**

ABM1/ABM2 = 37.71 dB

ABM1 comp = 5.36 dBA/m

BWC Factor = 0.12 dB

Location: 4, -10, 3.7 mm

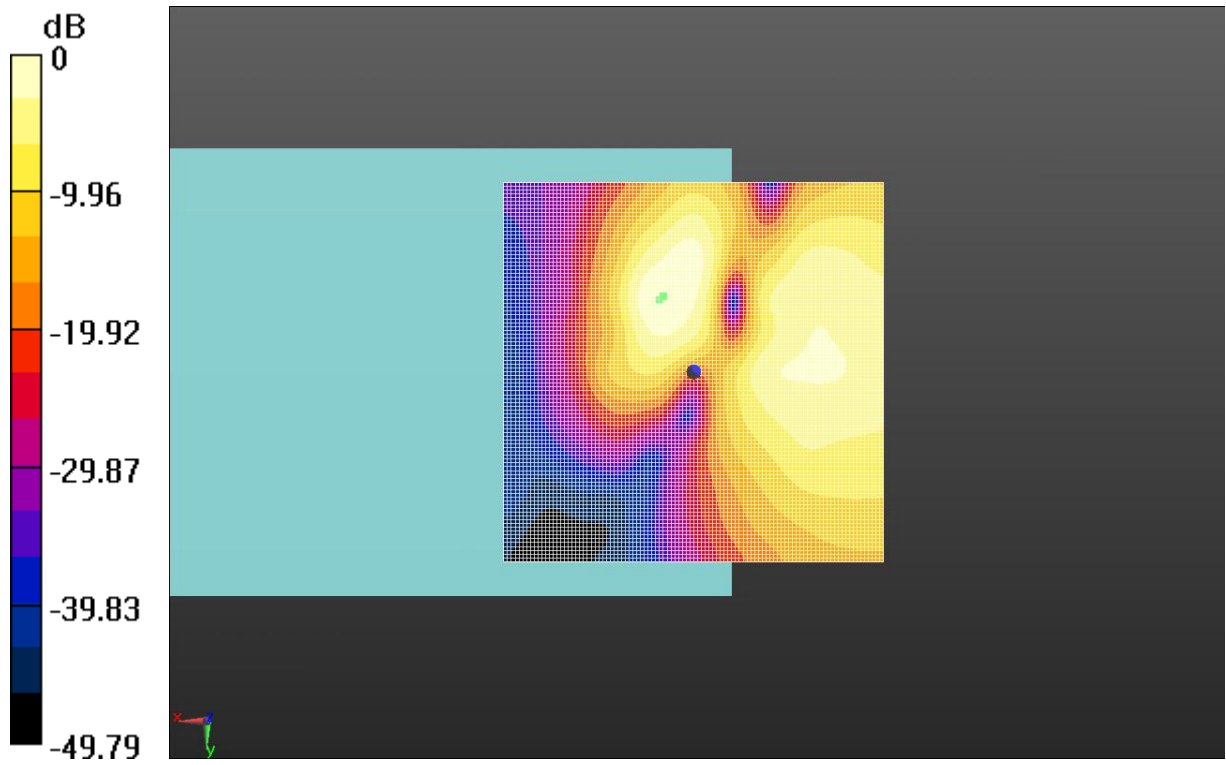

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.5 T-Coil WCDMA 850**



## T-Coil WCDMA 850 Perpendicular

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: WCDMA Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: AM1DV3 - 3086

### T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.12 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1 = 2.01 dBA/m

BWC Factor = 0.12 dB

Location: 4, 5.5, 3.7 mm

### T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.12 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 41.16 dB

ABM1 comp = -2.61 dBA/m

BWC Factor = 0.12 dB

Location: -4.5, 5, 3.7 mm

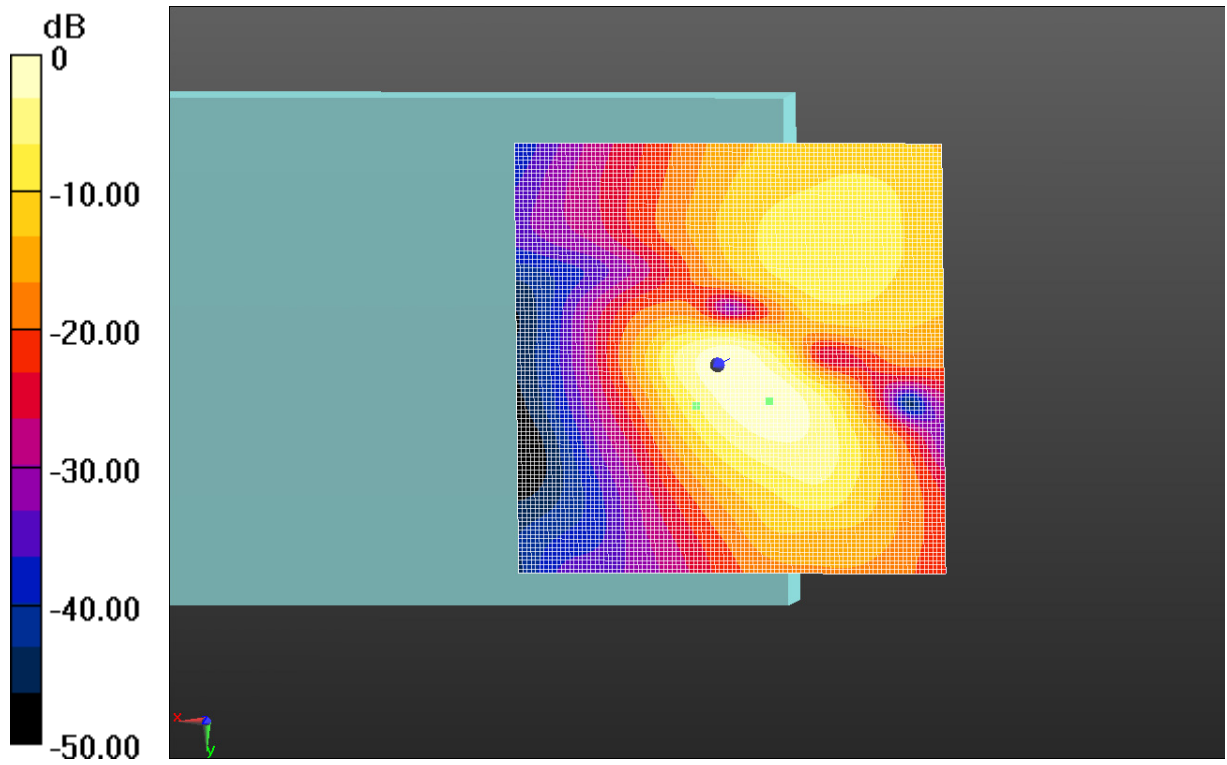

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.6 T-Coil WCDMA 850**



### **T-Coil WCDMA 1700 Transverse**

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: WCDMA Frequency: 1732.6 MHz Duty Cycle: 1:1

Probe: AM1DV3 - 3086

### **T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### **Cursor:**

ABM1 = 5.75 dBA/m

BWC Factor = 0.15 dB

Location: 4.5, -10, 3.7 mm

### **T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### **Cursor:**


ABM1/ABM2 = 39.37 dB

ABM1 comp = 5.74 dBA/m

BWC Factor = 0.15 dB

Location: 4.5, -9.5, 3.7 mm



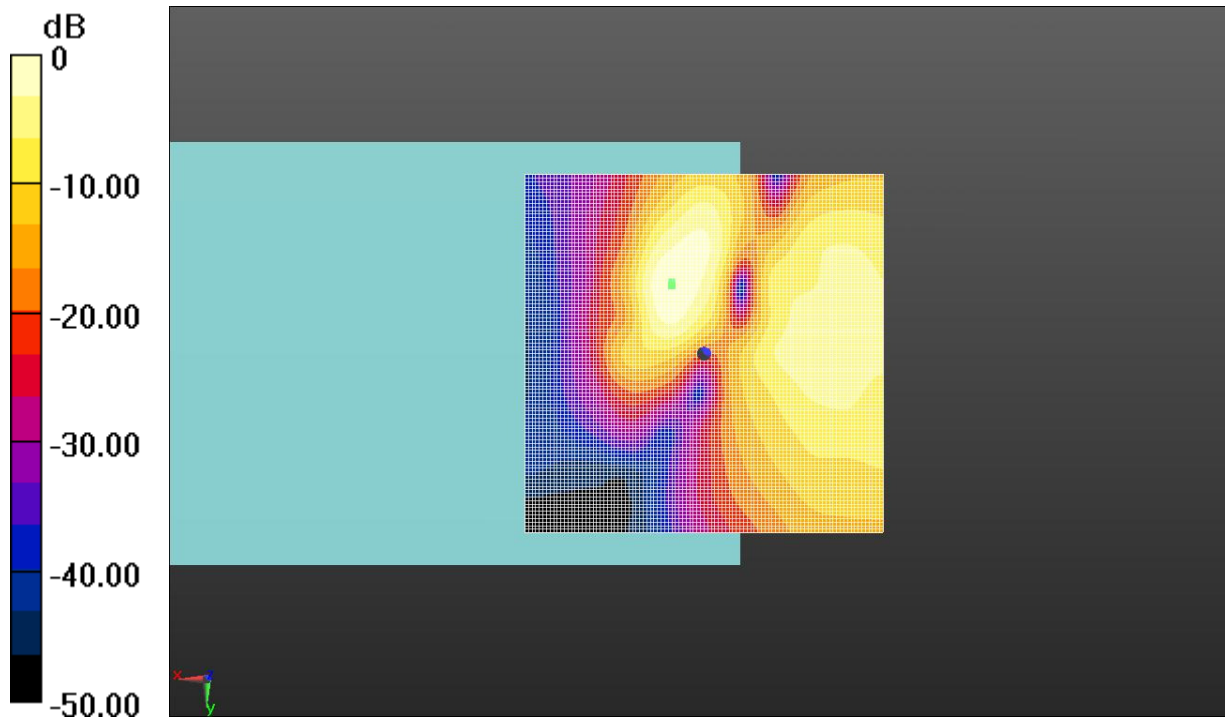

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.7 T-Coil WCDMA 1700**



## T-Coil WCDMA 1700 Perpendicular

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: WCDMA Frequency: 1732.6 MHz Duty Cycle: 1:1

Probe: AM1DV3 - 3086

### T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1 = 2.30 dBA/m

BWC Factor = 0.15 dB

Location: 3, 5.5, 3.7 mm

### T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 41.80 dB

ABM1 comp = -0.59 dBA/m

BWC Factor = 0.15 dB

Location: 0, 1, 3.7 mm

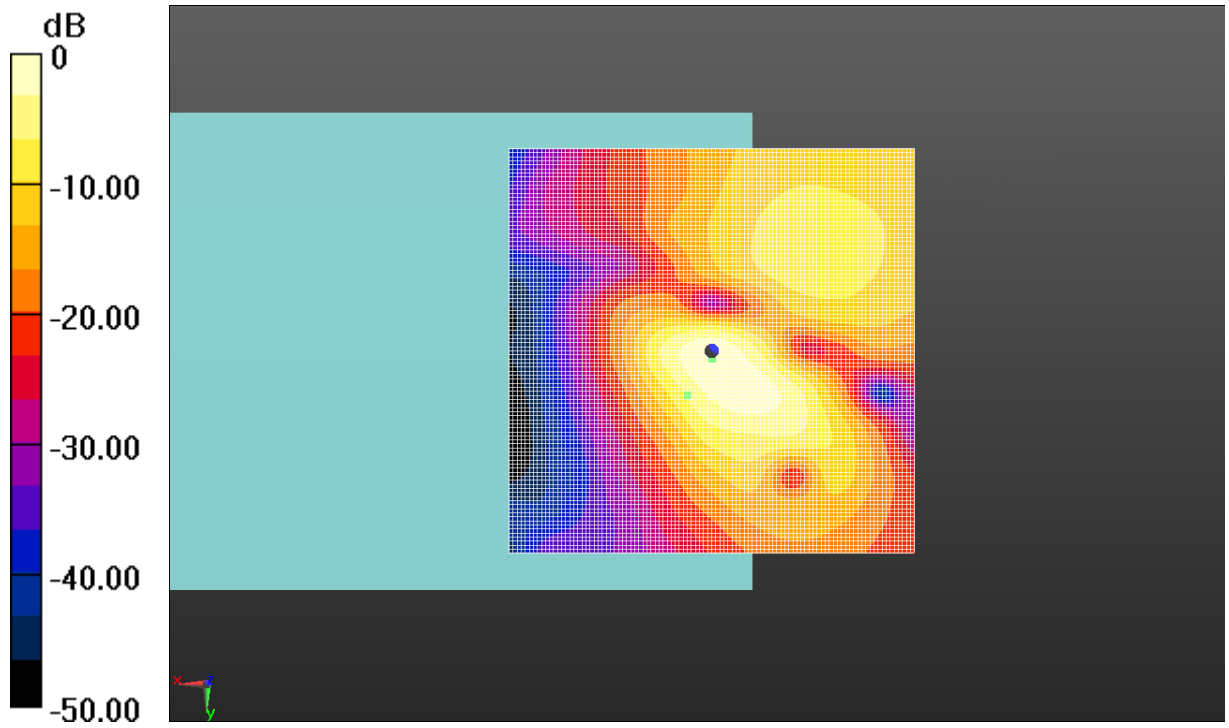

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.8 T-Coil WCDMA 1700**



## T-Coil WCDMA 1900 Transverse

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: WCDMA Frequency: 1880 MHz Duty Cycle: 1:1

Probe: AM1DV3 - 3086

### T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1 = 5.68 dBA/m

BWC Factor = 0.15 dB

Location: 4.5, -10, 3.7 mm

### T-Coil/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 37.48 dB

ABM1 comp = 5.39 dBA/m

BWC Factor = 0.15 dB

Location: 3, -10, 3.7 mm

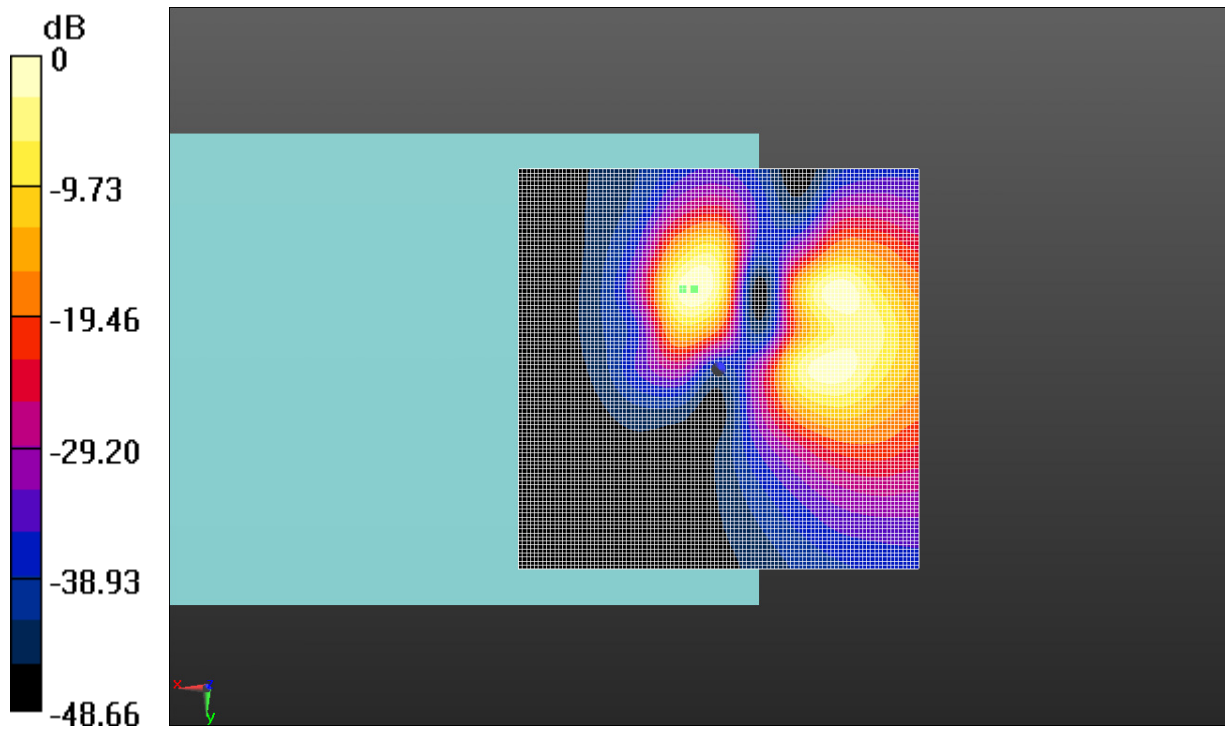

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.9 T-Coil WCDMA 1900**



### **T-Coil WCDMA 1900 Perpendicular**

Date/Time: 2017-2-10

Electronics: DAE4 Sn786

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: WCDMA Frequency: 1880 MHz Duty Cycle: 1:1

Probe: AM1DV3 - 3086

### **T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

#### **Cursor:**

ABM1 = 3.55 dBA/m

BWC Factor = 0.15 dB

Location: 0.5, 5, 3.7 mm

### **T-Coil/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)**

**(101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm


#### **Cursor:**

ABM1/ABM2 = 43.61 dB

ABM1 comp = 0.37 dBA/m

BWC Factor = 0.15 dB

Location: -5, 5.5, 3.7 mm

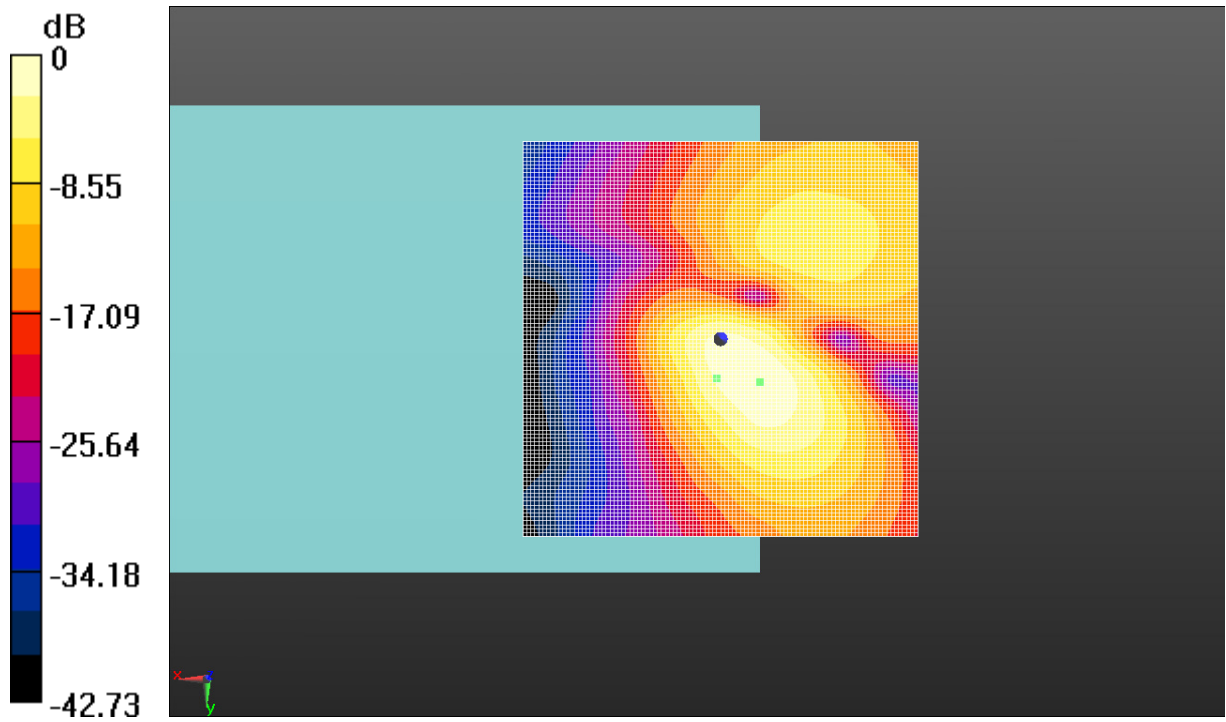

0 dB = 1.000 A/m = 0.00 dBA/m

**Fig B.10 T-Coil WCDMA 1900**

## ANNEX C FREQUENCY RESPONSE CURVES

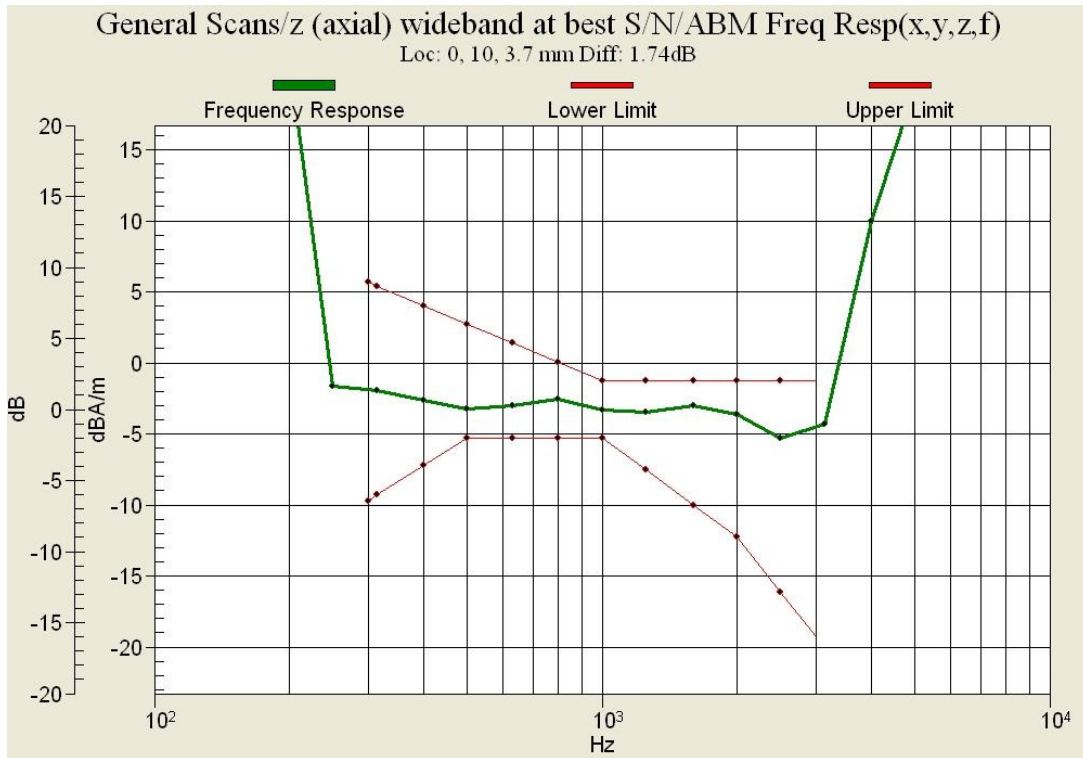


Figure C.1 Frequency Response of GSM 850

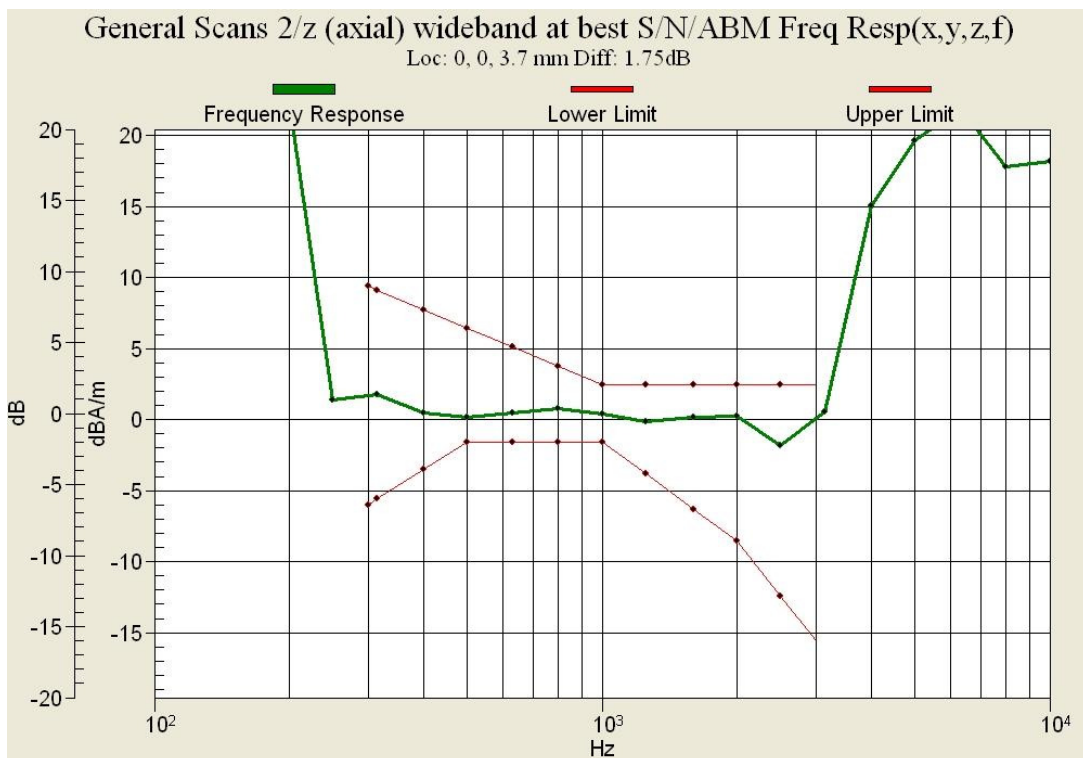


Figure C.2 Frequency Response of GSM 1900



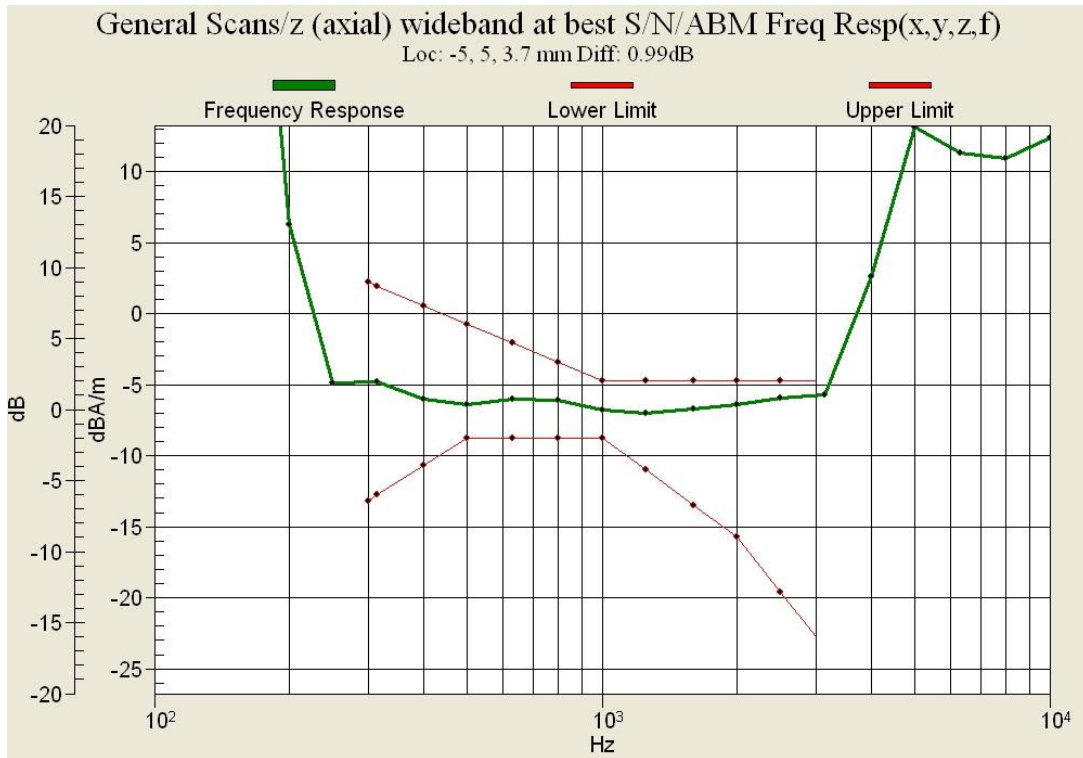


Figure C.3 Frequency Response of WCDMA 850

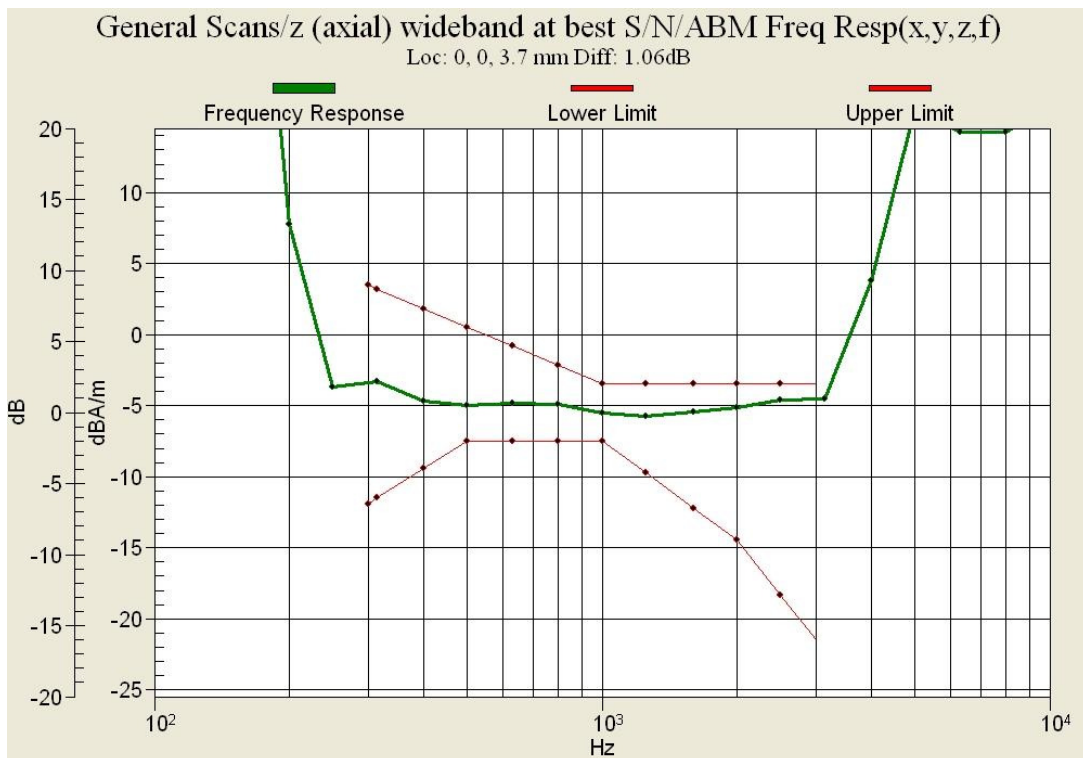


Figure C.4 Frequency Response of WCDMA 1700

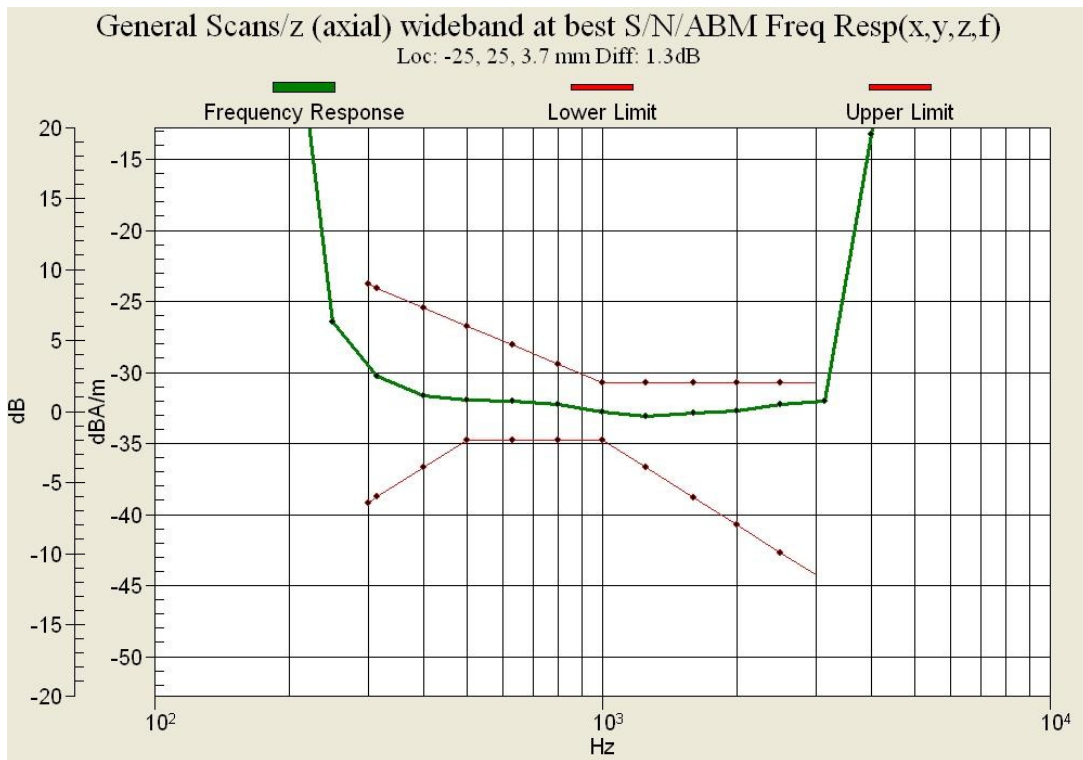


Figure C.5 Frequency Response of WCDMA 1900

## ANNEX D PROBE CALIBRATION CERTIFICATE

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TMC-SZ (Auden)**

Certificate No: **AM1DV3-3086\_Jan15**

### CALIBRATION CERTIFICATE

Object **AM1DV3 - SN: 3086**

Calibration procedure(s) **QA CAL-24.v4  
Calibration procedure for AM1D magnetic field probes and TMFS in the audio range**

Calibration date: **January 22, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature: (22 ± 0.3)°C and humidity < 40%.

Calibration Equipment used (M&PE critical for calibration)

Primary Standards	C #	Ca. Date (Certificate No.)	Scheduled Calibration
Kathley Millimeter Type 2001	SN: 0810273	03-Jul-14 (No. 15570)	Oct-15
Reference Probe AM1DV3	SN: 3000	06-Aug-14 (No. AM1D-3100 Aug14;	Aug-15
DAE	SN: 78	12-Sep-14 (No. DAC4-78) Serial;	Sep-15
Secondary Standards	C #	Check Date (in house)	Scheduled Check
AMLU	1150	01-Oct-15 (in house check Oct-12)	Oct-16
AMMI Audio Measuring Instrument	1162	26-Sep-12 (in house check Sep-12)	Sep-15

Calibrated by:	Name: Lutz Klyener	Function: Laboratory Technician	Signature: 
Approved by:	Name: Katalin Pokovic	Function: Technical Manager	Signature: 

Issued: January 22, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

## Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

## Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

## Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level  
RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

**AM1D probe identification and configuration data**

Item	<b>AM1DV2</b> Audio Magnetic 1D Field Probe
Type No	SP AM1 001 AF
Serial No	<b>1064</b>

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	40 dB

Manufacturer / Origin	Schmid & Partner Engineering AG, Zurich, Switzerland
Manufacturing date	November 06, 2007
Last calibration date	September 03, 2013

**Calibration data**

Connector rotation angle	(in DASY system)	<b>332.7 °</b>	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	<b>0.37 °</b>	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	<b>0.0658 V / (A/m)</b>	+/- 2.2 % (k=2)

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.