

FCC

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**Mobile Hotspot**

ISSUED TO  
Yulong Computer Telecommunication Scientific (Shenzhen)  
Co., Ltd

Coolpad Information Harbor, High-tech Industrial Park (North), Nanshan  
District, Shenzhen, P.R.C.



Tested by: Heng Aiping  
Heng Aiping  
(Engineer)

Date: Sep. 22, 2018

Approved by: Wei Yanquan  
Wei Yanquan  
(Chief Engineer)

Date: Sep. 22, 2018

Report No.: BL-SZ1880381-501  
EUT Name: Mobile Hotspot  
Model Name: cp331A  
Brand Name: coolpad  
Test Standard: 47 CFR Part 2 (10-1-17 Edition)  
47 CFR Part 24 (10-1-17 Edition)  
47 CFR Part 27 (10-1-17 Edition)  
FCC ID: R38YLCP331A

Test Conclusion: Pass  
Test Date: Sep. 04, 2018 ~ Sep. 12, 2018  
Date of Issue: Sep. 22, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

### Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Sep. 06, 2018</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Sep. 12, 2018</u>	<u>Increase the data of the A.1 Transmitter Radiated Power (EIRP/ERP)</u>
<u>Rev. 03</u>	<u>Sep. 22, 2018</u>	<u>Update the Network and Wireless connectivity</u>

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	4
1.1	Identification of the Testing Laboratory .....	4
1.2	Identification of the Responsible Testing Location .....	4
1.3	Laboratory Condition .....	4
1.4	Announce .....	5
2	PRODUCT INFORMATION .....	6
2.1	Applicant Information .....	6
2.2	Manufacturer Information .....	6
2.3	Factory Information .....	6
2.4	General Description for Equipment under Test (EUT) .....	6
2.5	Ancillary Equipment .....	6
2.6	Technical Information .....	7
3	SUMMARY OF TEST RESULTS.....	9
3.1	Test Standards.....	9
3.2	Test Verdict.....	9
4	GENERAL TEST CONFIGURATIONS.....	11
4.1	Test Environments .....	11
4.2	Test Equipment List .....	11
4.3	Test Configurations .....	13
4.4	Test Setup.....	16
5	TEST ITEMS.....	18
5.1	Transmitter Radiated Power (EIRP/ERP) .....	18
5.2	Peak to Average Ratio .....	21
5.3	Occupied Bandwidth .....	23

5.4	Frequency Stability.....	25
5.5	Spurious Emission at Antenna Terminals .....	27
5.6	Band Edge .....	29
5.7	Field Strength of Spurious Radiation .....	31
ANNEX A	TEST RESULTS.....	34
A.1	Transmitter Radiated Power (EIRP/ERP) .....	34
A.2	Field Strength of Spurious Radiation .....	45
ANNEX B	TEST SETUP PHOTOS .....	47
ANNEX C	EUT EXTERNAL PHOTOS .....	47
ANNEX D	EUT INTERNAL PHOTOS .....	47

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China.
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China.
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as an accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025. The accreditation certificate number is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20 °C to 35 °C
Ambient Relative Humidity	30 % to 60 %
Ambient Pressure	98 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v4.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address	Coolpad Information Harbor, High-tech Industrial Park (North), Nanshan District, Shenzhen, P.R.C.

### 2.2 Manufacturer Information

Manufacturer	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address	Coolpad Information Harbor, High-tech Industrial Park (North), Nanshan District, Shenzhen, P.R.C.

### 2.3 Factory Information

Factory	N/A
Address	N/A

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	Mobile Hotspot
Model Name Under Test	cp331A
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	P1
Software Version	2.0.158.P0.180824.cp331A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

### 2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	CPLD-427
	Serial No.	N/A
	Capacity	2150 mAh
	Rated Voltage	3.85 V
Ancillary Equipment 2	Limited Voltage	
	4.4 V	
	USB Cable	
	Length (Approx.)	1.0 m

## 2.6 Technical Information

All Network and Wireless connectivity for EUT	3G Network WCDMA/HSDPA/HSUPA Band 2/ 4 4G Network FDD LTE Band 2/ 4/ 12/ 66/ 71 WIFI 802.11a,802.11b, 802.11g and 802.11n (HT20/40)
About the Product	The equipment is Mobile Hotspot, intended for used with information technology equipment.

The requirement for the following technical information of the EUT was tested in this report:

Operating Bands	WCDMA/HSDPA/HSUPA Band 2/ 4 FDD LTE Band 2/ 4/ 12/ 66/ 71	
Modulation Type	WCDMA	QPSK
	HSDPA /HSUPA	QPSK
		16QAM
	LTE	QPSK
16QAM		
TX Frequency Range	WCDMA/HSDPA/HSUPA Band 2: 1850 MHz ~ 1910 MHz WCDMA/HSDPA/HSUPA Band 4: 1710 MHz ~ 1755 MHz FDD LTE Band 2: 1850 MHz ~ 1910 MHz FDD LTE Band 4: 1710 MHz ~ 1755 MHz FDD LTE Band 12: 699 MHz ~ 716 MHz FDD LTE Band 66: 1710 MHz ~ 1780 MHz FDD LTE Band 71: 663 MHz ~ 698 MHz	
Rx Frequency Range	WCDMA/HSDPA/HSUPA Band 2: 1930 MHz ~ 1990 MHz WCDMA/HSDPA/HSUPA Band 4: 2110 MHz ~ 2155 MHz FDD LTE Band 2: 1930 MHz ~ 1990 MHz FDD LTE Band 4: 2110 MHz ~ 2155 MHz FDD LTE Band 12: 729 MHz ~ 746 MHz FDD LTE Band 66: 2110 MHz ~ 2180 MHz FDD LTE Band 71: 617 MHz ~ 652 MHz	
Power Class	WCDMA/HSDPA/HSUPA Band 2: 3 WCDMA/HSDPA/HSUPA Band 4: 3 FDD LTE Band 2: 3 FDD LTE Band 4: 3 FDD LTE Band 12: 3 FDD LTE Band 66: 3 FDD LTE Band 71: 3	
Antenna Type	PIFA Antenna	
Antenna Gain	WCDMA/HSDPA/HSUPA Band 2: 0 dBi WCDMA/HSDPA/HSUPA Band 4: 0 dBi FDD LTE Band 2: 0 dBi FDD LTE Band 4: 0 dBi FDD LTE Band 12: -1 dBi FDD LTE Band 66: 0 dBi	

	FDD LTE Band 71: -1 dBi
--	-------------------------

Note 1: The EUT information are declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-17 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 24 Subpart E (10-1-17 Edition)	Broadband PCS
3	47 CFR Part 27 (10-1-17 Edition)	Miscellaneous Wireless Communications Services
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	KDB 971168 D01 v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters

#### 3.2 Test Verdict

No.	Test Description	FCC Part No.	Test Result	Test Verdict
1	Conducted RF Output Power	2.1046	--	N/A
2	Effective (Isotropic) Radiated Power	2.1046 24.232 27.50	ANNEX A.1	Pass
3	Peak to Average Ratio	2.1046 24.232(d) 27.50(d)	--	N/A
4	Occupied Bandwidth	2.1049 24.238 27.53	--	N/A
5	Frequency Stability	2.1055 24.235 27.54	--	N/A
6	Spurious Emission at Antenna Terminals	2.1051 24.238 27.53	--	N/A
7	Band Edge	2.1051 24.238 27.53	--	N/A
8	Field Strength of Spurious Radiation	2.1053 24.238 27.53	ANNEX A.2	Pass

Note: This report is partial report and conducted test results please refer to report I18N00930-UMTS and I18N00930\_LTE, issued by Shenzhen Academy of Information and Communications Technology. Only Effective (Isotropic) Radiated Power & Field Strength of Spurious Radiation is measured in this report.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Test Voltage of the EUT	NV (Normal Voltage)	3.7 V
Test Temperature of the EUT	NT (Normal Temperature)	+25 °C

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Software /Firmware Version	Cal. Date	Cal. Due
<b>Conducted Test System</b>						
Test Software 1	R&S	CMUgo	N/A	V2.0.1	N/A	N/A
Test Software 2	R&S	CMWRun	N/A	V1.8.9	N/A	N/A
Test Software 3	BALUN	BL410R	N/A	V2.1.1.36 6	N/A	N/A
Universal Radio Communication Tester	R&S	CMU 200	119280	V5.13	2018.03.16	2019.03.15
Wideband Radio Communication Tester	R&S	CMW 500	127794	V3.5.137	2018.06.15	2019.06.14
Wideband Radio Communication Tester	R&S	CMW 500	120598	V3.5.137	2018.03.05	2019.03.04
Spectrum Analyzer	R&S	FSV-30	103118	2.30.SP1	2018.06.15	2019.06.14
Spectrum Analyzer	Agilent	E4440A	MY45304434	A.11.21	2017.11.02	2018.11.01
Spectrum Analyzer	Agilent	E4440A	MY46181663	A.11.21	2017.11.02	2018.11.01
Temperature Chamber	AHK	SP20	1412	N/A	2018.06.15	2019.06.14
DC Power Supply	ITECH	IT6863A	6000140106 87210020	N/A	2018.06.14	2019.06.13
Power Sensor	Agilent	E9304A H18	MY41497164	N/A	2017.11.02	2018.11.01
Power Splitter	KMW	DCPD- LDC	1305003215	N/A	N/A	N/A
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	N/A	N/A	N/A
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	N/A	N/A	N/A
<b>Radiated Test System</b>						
Test Software	BALUN	BL410_E	N/A	V16.921	N/A	N/A
Test Antenna-Bi-Log	Schwarzbeck	VULB 9163	9163-624	N/A	2017.07.22	2019.07.21

Description	Manufacturer	Model	Serial No.	Software /Firmware Version	Cal. Date	Cal. Due
(30 MHz-3 GHz)						
Test Antenna-Horn(1-18 GHz)	Schwarzbeck	BBHA 9120D	9120D-1600	N/A	2016.07.12	2019.07.11
Test Antenna-Horn(18-40 GHz)	A-INFO	LB-180400KF	J211060273	N/A	2017.01.06	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	N/A	2017.02.21	2019.02.20
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A	N/A
EMI Receiver	KEYSIGHT	N9038A	MY53220118	A.14.16	2017.11.08	2018.11.07
Spectrum Analyzer	R&S	FSV-30	103118	2.30.SP1	2018.06.15	2019.06.14
Wideband Radio Communication Tester	R&S	CMW 500	121551	V3.2.73	2018.05.07	2019.05.06

### 4.3 Test Configurations

Test Items	Test Mode	Test Channel		
		LCH	MCH	HCH
Effective (Isotropic) Radiated Power	WCDMA Band 2	v	v	v
	WCDMA Band 4	v	v	v
	HSDPA Band 2	v	v	v
	HSDPA Band 4	v	v	v
	HSUPA Band 2	v	v	v
	HSUPA Band 4	v	v	v
Field Strength of Spurious Radiation	WCDMA Band 2	v	v	v
	WCDMA Band 4	v	v	v

Note 1: The mark “v” means that this configuration is chosen for testing.

Test Mode	UL Channel	UL Channel No.	UL Frequency (MHz)
WCDMA Band 2	Low Channel	9262	1852.4
	Middle Channel	9400	1880.0
	High Channel	9538	1907.6
WCDMA Band 4	Low Channel	1312	1712.4
	Middle Channel	1412	1732.4
	High Channel	1513	1752.6

LTE Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MCH	HCH
Effective (Isotropic) Radiated Power														
2	v	v	v	v	v	v	v	v	v	--	v	v	v	v
4	v	v	v	v	v	v	v	v	v	--	v	v	v	v
12	v	v	v	v	n	n	v	v	v	--	v	v	v	v
66	v	v	v	v	v	v	v	v	v	--	v	v	v	v
71	n	n	v	v	v	v	v	v	v	--	v	v	v	v
Field Strength of Spurious Radiation														
2	v	v	v	v	v	v	v	--	v	--	--	--	v	--
4	v	v	v	v	v	v	v	--	v	--	--	--	v	--
12	v	v	v	v	n	n	v	--	v	--	--	--	v	--
66	v	v	v	v	v	v	v	--	v	--	--	--	v	--
71	n	n	v	v	v	v	v	--	v	--	--	--	v	--


Note 1: The mark “v” means that this configuration is chosen for testing.  
 Note 2: The mark “n” means that this bandwidth is not supported.

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 2	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
LTE Band 4	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
		20	20300	1745
LTE Band 12	Low Range	1.4	23017	699.7
		3	23025	700.5
		5	23035	701.5
		10	23060	704
	Middle Range	1.4/3/5/10	23095	707.5
	High Range	1.4	23173	715.3
		3	23165	714.5
		5	23155	713.5
		10	23130	711
	LTE Band 66	Low Range	1.4	131979
3			131987	1711.5
5			131997	1712.5
10			132022	1715
15			132047	1717.5
20			132072	1720
Middle Range		1.4/3/5/10/15/20	132322	1745

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
	High Range	1.4	132665	1779.3
		3	132657	1778.5
		5	132647	1777.5
		10	132622	1775
		15	132597	1772.5
		20	132572	1770
LTE Band 71	Low Range	5	133147	665.5
		10	133172	668
		15	133197	670.5
		20	133222	673
	Middle Range	5/10/15	133297	680.5
		20	133322	683
	High Range	5	133447	695.5
		10	133422	693
		15	133397	690.5
		20	133372	688


## 4.4 Test Setup

### 4.4.1 For Antenna Port Test

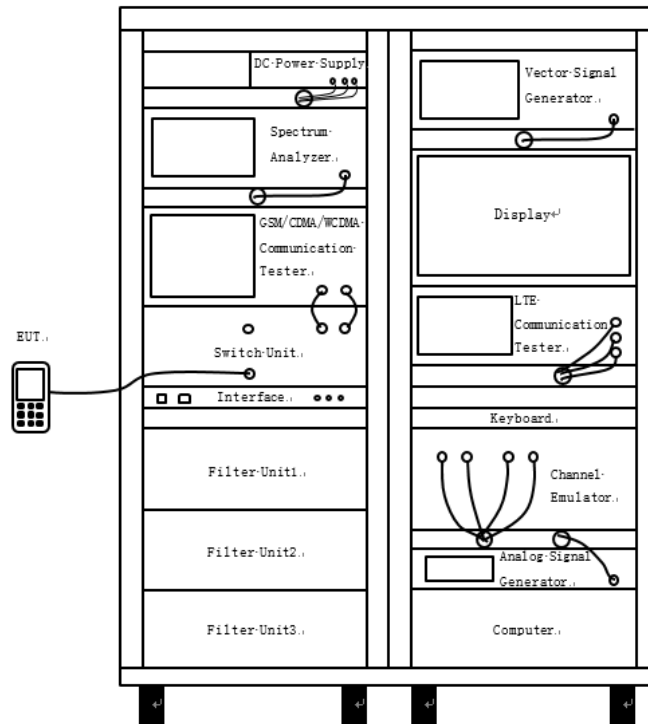

(Diagram 1)


### 4.4.2 For Frequency Stability Test

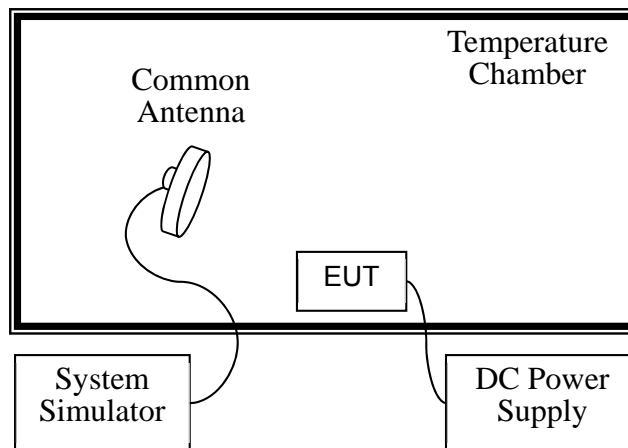

(Diagram 2)




4.4.3 For Radiated Test (30 MHz ~ 1 GHz)

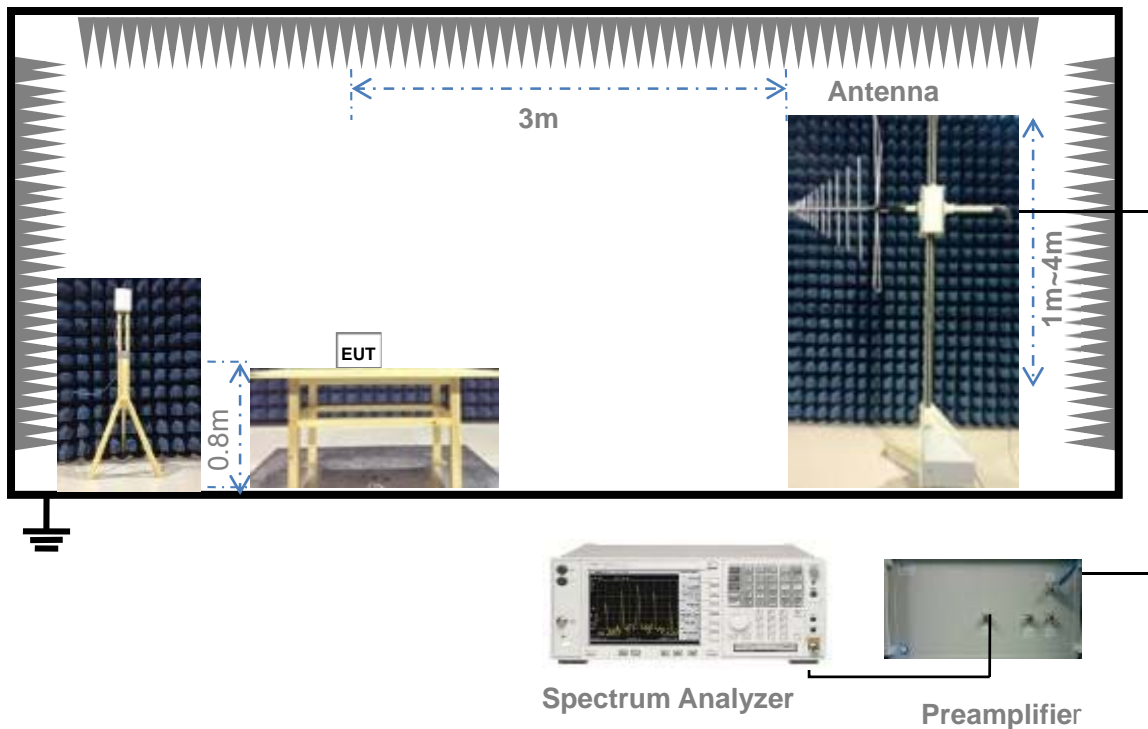

(Diagram 3)

4.4.4 For Radiated Test (Above 1 GHz)

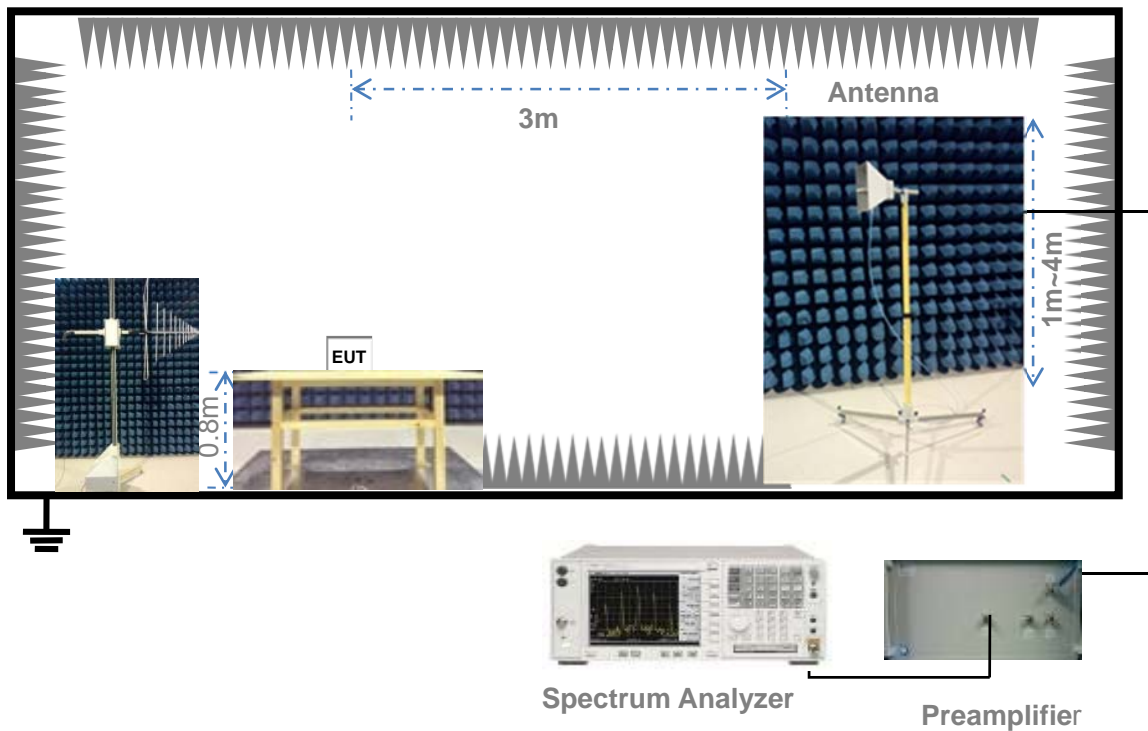

(Diagram 4)

## 5 TEST ITEMS

### 5.1 Transmitter Radiated Power (EIRP/ERP)

#### 5.1.1 Limit

FCC § 2.1046 & 24.232(c) & 27.50(c) & 27.50(d) & 27.50(h)

According to FCC section 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and fixed and mobile stations in the 600MHz uplink band are limited to 3 watts ERP.

FCC section 27.50(d) (4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

#### 5.1.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for conducted test, and the section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description is used for radiated test.

#### 5.1.3 Test Procedure

##### **Description of the Conducted Output Power Measurement**

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The relevant equation for determining the conducted measured value is:

Conducted Output Power Value (dBm) = Measured Value (dBm) + Path Loss (dB)

where:

Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm;

Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm;

Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB;

During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB).

For example:

In the conducted output power test, when measured value for GSM850 is 24.7 dBm, and path loss is 8.5 dB, then final conducted output power value is:

$$\text{Conducted Output Power Value (dBm)} = 24.7 \text{ dBm} + 8.5 \text{ dB} = 33.2 \text{ dBm}$$

### **Description of the Transmitter Radiated Power Measurement**

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = P_{\text{Meas}} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

For example:

In the EIRP test, when  $P_{\text{Meas}}$  value for GSM1900 is 30.2 dBm, LC is 0.6 dB, and GT is -3.4 dB, then final EIRP value is:

$$\text{EIRP for GSM1900} = 30.2 \text{ dBm} - 3.4 \text{ dBi} - 0.6 \text{ dB} = 26.2 \text{ dBm}$$

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

#### 5.1.4 Test Result

Please refer to ANNEX A.1.

## 5.2 Peak to Average Ratio

### 5.2.1 Limit

FCC § 2.1046 & 24.232(d) & 27.50(d)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d) (5), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

### 5.2.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test.

### 5.2.3 Test Procedure

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

According to KDB 971168 D01, there is CCDF procedure for PAPR:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

Alternate procedure for PAPR:

Use one of the procedures presented in 4.1 to measure the total peak power and record as  $P_{PK}$ . Use one of the applicable procedures presented 4.2 to measure the total average power and record as  $P_{Avg}$ . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{PK} (dBm) - P_{Avg} (dBm).$$

#### 5.2.4 Test Result

Please refer to chapter 3.2.

## 5.3 Occupied Bandwidth

### 5.3.1 Limit

FCC § 2.1049

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and on above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

### 5.3.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test.

### 5.3.3 Test Procedure

The following procedure shall be used for measuring power bandwidth.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the anticipated OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) For -26 dB OBW, the dynamic range of the spectrum analyzer at the selected RBW shall be at least 10dB below the target “-X dB down” requirement, e.g. -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be 36dB below the reference value.
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) For 99% OBW, use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

- h) For -26 dB OBW, determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace

to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

Determine the “-X dB down amplitude” as equal to (reference value -X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

i) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

j) Change variable modulations, coding, or channel bandwidth settings, then repeat above test procedures.

#### 5.3.4 Test Result

Please refer to chapter 3.2.



## 5.4 Frequency Stability

### 5.4.1 Limit

FCC § 2.1055 & 24.235 & 27.54

FCC § 2.1055

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ .
- (2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than  $10^{\circ}\text{C}$  through the range.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacture.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 5.4.2 Test Setup

The section 4.4.2 (Diagram 2) test setup description is used for this test.

### 5.4.3 Test Procedure

1. The EUT is placed in a temperature chamber.
2. The temperature is set to  $25^{\circ}\text{C}$  and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured.
3. The temperature is increased by not more than 10 degrees, allowed to stabilize and soak, and then repeat the frequency error measurement.
4. Repeat procedure 3 until  $+50^{\circ}\text{C}$  and  $-30^{\circ}\text{C}$  is reached.

5. Change supply voltage, and repeat measurement until extreme voltage is reached.

#### 5.4.4 Test Result

Please refer to chapter 3.2.

## 5.5 Spurious Emission at Antenna Terminals

### 5.5.1 Limit

FCC § 2.1051 & 24.238(a) & 27.53(g) & 27.53(h)

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10*\log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 5.5.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test.

### 5.5.3 Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency blocks a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the

carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.
2. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.
4. Spurious emissions are tested with 0.001MHz RBW for frequency less than 150kHz, 0.01MHz RBW for frequency less than 30MHz, 0.1MHz RBW for frequency less than 1GHz, and 1MHz RBW for frequency above 1GHz. And sweep point number are at least 401, referring to following formula.

Sweep point number = Span/RBW

VBW=3\*RBW

Detector Mode=mean or average power

5. Record the frequencies and levels of spurious emissions.

#### 5.5.4 Test Result

Please refer to chapter 3.2.

## 5.6 Band Edge

### 5.6.1 Limit

FCC § 2.1051 & 24.238(a) & 27.53(g) & 27.53(h)

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10*\log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 5.6.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test.

### 5.6.3 Test Procedure

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

1.The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.

3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.
4. The center of the spectrum analyzer was set to block edge frequency.
5. Band edge are tested with  $1\% \cdot \text{cBW}$  (RBW), and sweep point number referred to following formula.

$$\text{Sweep point number} = 2 \cdot \text{Span} / \text{RBW}$$

$$\text{VBW} = 3 \cdot \text{RBW}$$

6. Record the frequencies and levels of spurious emissions.

#### 5.6.4 Test Result

Please refer to chapter 3.2.

## 5.7 Field Strength of Spurious Radiation

### 5.7.1 Limit

FCC § 2.1053 & 24.238(a) & 27.53(g) & 27.53(h)

FCC § 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10*\log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 5.7.2 Test Setup

The section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on; the measuring receiver shall be tuned to the frequency of the transmitter under test.

6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring received, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Final measurement calculation as below:

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).



For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

#### 5.7.4 Test Result

Please refer to ANNEX A.2.

## ANNEX A TEST RESULTS

### A.1 Transmitter Radiated Power (EIRP/ERP)

#### WCDMA Mode Test Data

Test Band	Test Channel	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
WCDMA Band 2	LCH	23.318	0.21	2.00	Pass
	MCH	23.379	0.22	2.00	Pass
	HCH	23.048	0.20	2.00	Pass
HSDPA Band 2	LCH	23.382	0.22	2.00	Pass
	MCH	22.358	0.17	2.00	Pass
	HCH	22.794	0.19	2.00	Pass
HSUPA Band 2	LCH	23.316	0.21	2.00	Pass
	MCH	22.463	0.18	2.00	Pass
	HCH	22.107	0.16	2.00	Pass

Test Band	Test Channel	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
WCDMA Band 4	LCH	20.533	0.11	1.00	Pass
	MCH	20.420	0.11	1.00	Pass
	HCH	20.562	0.11	1.00	Pass
HSDPA Band 4	LCH	20.573	0.11	1.00	Pass
	MCH	20.321	0.11	1.00	Pass
	HCH	20.553	0.11	1.00	Pass
HSUPA Band 4	LCH	20.759	0.12	1.00	Pass
	MCH	20.383	0.11	1.00	Pass
	HCH	20.437	0.11	1.00	Pass

## LTE Mode Test Data

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE BAND2</b>							
1.4 MHz	LCH	QPSK	RB1#0	21.981	0.16	2.00	Pass
			RB6#0	20.895	0.12	2.00	Pass
		16-QAM	RB1#0	20.820	0.12	2.00	Pass
			RB6#0	19.923	0.10	2.00	Pass
	MCH	QPSK	RB1#0	22.044	0.16	2.00	Pass
			RB6#0	20.936	0.12	2.00	Pass
		16-QAM	RB1#0	21.117	0.13	2.00	Pass
			RB6#0	19.852	0.10	2.00	Pass
	HCH	QPSK	RB1#0	20.733	0.12	2.00	Pass
			RB6#0	21.861	0.15	2.00	Pass
		16-QAM	RB1#0	19.857	0.10	2.00	Pass
			RB6#0	21.012	0.13	2.00	Pass
3 MHz	LCH	QPSK	RB1#0	21.996	0.16	2.00	Pass
			RB15#0	20.843	0.12	2.00	Pass
		16-QAM	RB1#0	20.942	0.12	2.00	Pass
			RB15#0	19.972	0.10	2.00	Pass
	MCH	QPSK	RB1#0	21.948	0.16	2.00	Pass
			RB15#0	20.661	0.12	2.00	Pass
		16-QAM	RB1#0	21.052	0.13	2.00	Pass
			RB15#0	19.815	0.10	2.00	Pass
	HCH	QPSK	RB1#0	21.843	0.15	2.00	Pass
			RB15#0	20.716	0.12	2.00	Pass
		16-QAM	RB1#0	20.637	0.12	2.00	Pass
			RB15#0	19.892	0.10	2.00	Pass
5 MHz	LCH	QPSK	RB1#0	21.973	0.16	2.00	Pass
			RB25#0	20.852	0.12	2.00	Pass
		16-QAM	RB1#0	20.579	0.11	2.00	Pass
			RB25#0	19.923	0.10	2.00	Pass
	MCH	QPSK	RB1#0	21.871	0.15	2.00	Pass
			RB25#0	20.897	0.12	2.00	Pass
		16-QAM	RB1#0	21.216	0.13	2.00	Pass
			RB25#0	19.952	0.10	2.00	Pass
	HCH	QPSK	RB1#0	21.743	0.15	2.00	Pass
			RB25#0	20.834	0.12	2.00	Pass
		16-QAM	RB1#0	20.393	0.11	2.00	Pass
			RB25#0	19.903	0.10	2.00	Pass
10 MHz	LCH	QPSK	RB1#0	21.643	0.15	2.00	Pass
			RB50#0	20.772	0.12	2.00	Pass
		16-QAM	RB1#0	20.561	0.11	2.00	Pass
			RB50#0	19.861	0.10	2.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict	
<b>LTE BAND2</b>								
	MCH	QPSK	RB1#0	21.772	0.15	2.00	Pass	
			RB50#0	20.847	0.12	2.00	Pass	
		16-QAM	RB1#0	20.963	0.12	2.00	Pass	
			RB50#0	19.991	0.10	2.00	Pass	
	HCH	QPSK	RB1#0	21.672	0.15	2.00	Pass	
			RB50#0	20.630	0.12	2.00	Pass	
		16-QAM	RB1#0	20.533	0.11	2.00	Pass	
			RB50#0	19.797	0.10	2.00	Pass	
	15 MHz	LCH	QPSK	RB1#0	21.532	0.14	2.00	Pass
				RB75#0	20.902	0.12	2.00	Pass
			16-QAM	RB1#0	20.930	0.12	2.00	Pass
				RB75#0	19.919	0.10	2.00	Pass
MCH		QPSK	RB1#0	21.621	0.15	2.00	Pass	
			RB75#0	20.882	0.12	2.00	Pass	
		16-QAM	RB1#0	21.147	0.13	2.00	Pass	
			RB75#0	19.864	0.10	2.00	Pass	
HCH		QPSK	RB1#0	22.073	0.16	2.00	Pass	
			RB75#0	20.716	0.12	2.00	Pass	
		16-QAM	RB1#0	20.972	0.13	2.00	Pass	
			RB75#0	19.733	0.09	2.00	Pass	
20 MHz	LCH	QPSK	RB1#0	22.095	0.16	2.00	Pass	
			RB100#0	20.662	0.12	2.00	Pass	
		16-QAM	RB1#0	21.731	0.15	2.00	Pass	
			RB100#0	19.813	0.10	2.00	Pass	
	MCH	QPSK	RB1#0	21.992	0.16	2.00	Pass	
			RB100#0	20.777	0.12	2.00	Pass	
		16-QAM	RB1#0	20.946	0.12	2.00	Pass	
			RB100#0	19.812	0.10	2.00	Pass	
	HCH	QPSK	RB1#0	22.165	0.16	2.00	Pass	
			RB100#0	20.724	0.12	2.00	Pass	
		16-QAM	RB1#0	21.793	0.15	2.00	Pass	
			RB100#0	19.811	0.10	2.00	Pass	

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE BAND4</b>							
1.4 MHz	LCH	QPSK	RB1#0	21.652	0.15	1.00	Pass
			RB6#0	20.531	0.11	1.00	Pass
		16-QAM	RB1#0	20.729	0.12	1.00	Pass
			RB6#0	19.563	0.09	1.00	Pass
	MCH	QPSK	RB1#0	21.812	0.15	1.00	Pass
			RB6#0	20.531	0.11	1.00	Pass
		16-QAM	RB1#0	20.683	0.12	1.00	Pass
			RB6#0	19.395	0.09	1.00	Pass
	HCH	QPSK	RB1#0	21.672	0.15	1.00	Pass
			RB6#0	20.494	0.11	1.00	Pass
		16-QAM	RB1#0	20.768	0.12	1.00	Pass
			RB6#0	19.373	0.09	1.00	Pass
3 MHz	LCH	QPSK	RB1#0	21.652	0.15	1.00	Pass
			RB15#0	20.484	0.11	1.00	Pass
		16-QAM	RB1#0	20.255	0.11	1.00	Pass
			RB15#0	19.191	0.08	1.00	Pass
	MCH	QPSK	RB1#0	21.810	0.15	1.00	Pass
			RB15#0	20.532	0.11	1.00	Pass
		16-QAM	RB1#0	21.610	0.14	1.00	Pass
			RB15#0	19.602	0.09	1.00	Pass
	HCH	QPSK	RB1#0	21.341	0.14	1.00	Pass
			RB15#0	20.402	0.11	1.00	Pass
		16-QAM	RB1#0	20.631	0.12	1.00	Pass
			RB15#0	19.260	0.08	1.00	Pass
5 MHz	LCH	QPSK	RB1#0	21.417	0.14	1.00	Pass
			RB25#0	20.623	0.12	1.00	Pass
		16-QAM	RB1#0	20.371	0.11	1.00	Pass
			RB25#0	19.792	0.10	1.00	Pass
	MCH	QPSK	RB1#0	21.863	0.15	1.00	Pass
			RB25#0	20.522	0.11	1.00	Pass
		16-QAM	RB1#0	21.221	0.13	1.00	Pass
			RB25#0	19.701	0.09	1.00	Pass
	HCH	QPSK	RB1#0	21.232	0.13	1.00	Pass
			RB25#0	20.542	0.11	1.00	Pass
		16-QAM	RB1#0	20.272	0.11	1.00	Pass
			RB25#0	19.481	0.09	1.00	Pass
10 MHz	LCH	QPSK	RB1#0	21.372	0.14	1.00	Pass
			RB50#0	20.563	0.11	1.00	Pass
		16-QAM	RB1#0	20.392	0.11	1.00	Pass
			RB50#0	19.630	0.09	1.00	Pass
	MCH	QPSK	RB1#0	21.501	0.14	1.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE BAND4</b>							
		16-QAM	RB50#0	20.690	0.12	1.00	Pass
			RB1#0	21.042	0.13	1.00	Pass
		RB50#0	19.733	0.09	1.00	Pass	
	HCH	QPSK	RB1#0	21.572	0.14	1.00	Pass
			RB50#0	20.451	0.11	1.00	Pass
		16-QAM	RB1#0	20.365	0.11	1.00	Pass
			RB50#0	19.652	0.09	1.00	Pass
15 MHz	LCH	QPSK	RB1#0	21.382	0.14	1.00	Pass
			RB75#0	20.346	0.11	1.00	Pass
		16-QAM	RB1#0	20.561	0.11	1.00	Pass
			RB75#0	19.641	0.09	1.00	Pass
	MCH	QPSK	RB1#0	21.287	0.13	1.00	Pass
			RB75#0	20.445	0.11	1.00	Pass
		16-QAM	RB1#0	20.772	0.12	1.00	Pass
			RB75#0	19.623	0.09	1.00	Pass
	HCH	QPSK	RB1#0	21.401	0.14	1.00	Pass
			RB75#0	20.332	0.11	1.00	Pass
		16-QAM	RB1#0	20.865	0.12	1.00	Pass
			RB75#0	19.473	0.09	1.00	Pass
20 MHz	LCH	QPSK	RB1#0	21.051	0.13	1.00	Pass
			RB100#0	20.595	0.11	1.00	Pass
		16-QAM	RB1#0	20.612	0.12	1.00	Pass
			RB100#0	19.508	0.09	1.00	Pass
	MCH	QPSK	RB1#0	21.402	0.14	1.00	Pass
			RB100#0	20.522	0.11	1.00	Pass
		16-QAM	RB1#0	20.333	0.11	1.00	Pass
			RB100#0	19.484	0.09	1.00	Pass
	HCH	QPSK	RB1#0	21.842	0.15	1.00	Pass
			RB100#0	20.321	0.11	1.00	Pass
		16-QAM	RB1#0	21.552	0.14	1.00	Pass
			RB100#0	19.533	0.09	1.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE BAND12</b>							
1.4 MHz	LCH	QPSK	RB1#0	20.731	0.12	3.00	Pass
			RB6#0	19.475	0.09	3.00	Pass
		16-QAM	RB1#0	19.720	0.09	3.00	Pass
			RB6#0	18.372	0.07	3.00	Pass
	MCH	QPSK	RB1#0	20.512	0.11	3.00	Pass
			RB6#0	19.521	0.09	3.00	Pass
		16-QAM	RB1#0	18.897	0.08	3.00	Pass
			RB6#0	18.375	0.07	3.00	Pass
	HCH	QPSK	RB1#0	20.326	0.11	3.00	Pass
			RB6#0	19.522	0.09	3.00	Pass
		16-QAM	RB1#0	19.252	0.08	3.00	Pass
			RB6#0	18.180	0.07	3.00	Pass
3 MHz	LCH	QPSK	RB1#0	20.322	0.11	3.00	Pass
			RB15#0	19.528	0.09	3.00	Pass
		16-QAM	RB1#0	19.382	0.09	3.00	Pass
			RB15#0	18.627	0.07	3.00	Pass
	MCH	QPSK	RB1#0	20.536	0.11	3.00	Pass
			RB15#0	19.460	0.09	3.00	Pass
		16-QAM	RB1#0	19.643	0.09	3.00	Pass
			RB15#0	18.462	0.07	3.00	Pass
	HCH	QPSK	RB1#0	20.554	0.11	3.00	Pass
			RB15#0	19.493	0.09	3.00	Pass
		16-QAM	RB1#0	19.292	0.08	3.00	Pass
			RB15#0	18.361	0.07	3.00	Pass
5 MHz	LCH	QPSK	RB1#0	20.567	0.11	3.00	Pass
			RB25#0	19.486	0.09	3.00	Pass
		16-QAM	RB1#0	19.216	0.08	3.00	Pass
			RB25#0	18.562	0.07	3.00	Pass
	MCH	QPSK	RB1#0	20.321	0.11	3.00	Pass
			RB25#0	19.320	0.09	3.00	Pass
		16-QAM	RB1#0	19.935	0.10	3.00	Pass
			RB25#0	18.387	0.07	3.00	Pass
	HCH	QPSK	RB1#0	20.386	0.11	3.00	Pass
			RB25#0	19.370	0.09	3.00	Pass
		16-QAM	RB1#0	19.492	0.09	3.00	Pass
			RB25#0	18.667	0.07	3.00	Pass
10 MHz	LCH	QPSK	RB1#0	20.420	0.11	3.00	Pass
			RB50#0	19.243	0.08	3.00	Pass
		16-QAM	RB1#0	19.221	0.08	3.00	Pass
			RB50#0	18.292	0.07	3.00	Pass
	MCH	QPSK	RB1#0	20.417	0.11	3.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE BAND12</b>							
		16-QAM	RB50#0	19.235	0.08	3.00	Pass
			RB1#0	19.906	0.10	3.00	Pass
	HCH	QPSK	RB50#0	18.436	0.07	3.00	Pass
			RB1#0	20.432	0.11	3.00	Pass
		16-QAM	RB50#0	19.393	0.09	3.00	Pass
			RB1#0	19.181	0.08	3.00	Pass
			RB50#0	18.468	0.07	3.00	Pass
			RB1#0				



Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE BAND66</b>							
1.4 MHz	LCH	QPSK	RB1#0	22.042	0.16	1.00	Pass
			RB6#0	20.872	0.12	1.00	Pass
		16-QAM	RB1#0	21.323	0.14	1.00	Pass
			RB6#0	19.873	0.10	1.00	Pass
	MCH	QPSK	RB1#0	22.050	0.16	1.00	Pass
			RB6#0	21.285	0.13	1.00	Pass
		16-QAM	RB1#0	21.391	0.14	1.00	Pass
			RB6#0	20.130	0.10	1.00	Pass
	HCH	QPSK	RB1#0	21.938	0.16	1.00	Pass
			RB6#0	21.050	0.13	1.00	Pass
		16-QAM	RB1#0	21.347	0.14	1.00	Pass
			RB6#0	19.910	0.10	1.00	Pass
3 MHz	LCH	QPSK	RB1#0	21.733	0.15	1.00	Pass
			RB15#0	20.861	0.12	1.00	Pass
		16-QAM	RB1#0	20.902	0.12	1.00	Pass
			RB15#0	19.961	0.10	1.00	Pass
	MCH	QPSK	RB1#0	22.372	0.17	1.00	Pass
			RB15#0	21.238	0.13	1.00	Pass
		16-QAM	RB1#0	21.714	0.15	1.00	Pass
			RB15#0	20.251	0.11	1.00	Pass
	HCH	QPSK	RB1#0	22.293	0.17	1.00	Pass
			RB15#0	21.221	0.13	1.00	Pass
		16-QAM	RB1#0	20.592	0.11	1.00	Pass
			RB15#0	20.151	0.10	1.00	Pass
5 MHz	LCH	QPSK	RB1#0	21.852	0.15	1.00	Pass
			RB25#0	21.065	0.13	1.00	Pass
		16-QAM	RB1#0	20.972	0.13	1.00	Pass
			RB25#0	20.062	0.10	1.00	Pass
	MCH	QPSK	RB1#0	22.071	0.16	1.00	Pass
			RB25#0	21.222	0.13	1.00	Pass
		16-QAM	RB1#0	21.262	0.13	1.00	Pass
			RB25#0	20.288	0.11	1.00	Pass
	HCH	QPSK	RB1#0	22.011	0.16	1.00	Pass
			RB25#0	21.219	0.13	1.00	Pass
		16-QAM	RB1#0	20.872	0.12	1.00	Pass
			RB25#0	20.420	0.11	1.00	Pass
10 MHz	LCH	QPSK	RB1#0	21.791	0.15	1.00	Pass
			RB50#0	21.074	0.13	1.00	Pass
		16-QAM	RB1#0	20.743	0.12	1.00	Pass
			RB50#0	20.046	0.10	1.00	Pass
	MCH	QPSK	RB1#0	22.324	0.17	1.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE BAND66</b>							
		16-QAM	RB50#0	21.225	0.13	1.00	Pass
			RB1#0	21.890	0.15	1.00	Pass
	HCH	QPSK	RB50#0	20.212	0.11	1.00	Pass
			RB1#0	21.871	0.15	1.00	Pass
		16-QAM	RB50#0	21.055	0.13	1.00	Pass
			RB1#0	20.856	0.12	1.00	Pass
15 MHz	LCH	QPSK	RB1#0	21.822	0.15	1.00	Pass
			RB75#0	21.022	0.13	1.00	Pass
		16-QAM	RB1#0	20.990	0.13	1.00	Pass
			RB75#0	19.995	0.10	1.00	Pass
	MCH	QPSK	RB1#0	22.215	0.17	1.00	Pass
			RB75#0	21.130	0.13	1.00	Pass
		16-QAM	RB1#0	21.962	0.16	1.00	Pass
			RB75#0	20.120	0.10	1.00	Pass
	HCH	QPSK	RB1#0	21.974	0.16	1.00	Pass
			RB75#0	20.965	0.12	1.00	Pass
		16-QAM	RB1#0	21.040	0.13	1.00	Pass
			RB75#0	20.018	0.10	1.00	Pass
20 MHz	LCH	QPSK	RB1#0	21.955	0.16	1.00	Pass
			RB100#0	20.961	0.12	1.00	Pass
		16-QAM	RB1#0	21.663	0.15	1.00	Pass
			RB100#0	20.014	0.10	1.00	Pass
	MCH	QPSK	RB1#0	22.130	0.16	1.00	Pass
			RB100#0	21.026	0.13	1.00	Pass
		16-QAM	RB1#0	21.402	0.14	1.00	Pass
			RB100#0	20.180	0.10	1.00	Pass
	HCH	QPSK	RB1#0	21.949	0.16	1.00	Pass
			RB100#0	21.090	0.13	1.00	Pass
		16-QAM	RB1#0	21.825	0.15	1.00	Pass
			RB100#0	20.041	0.10	1.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE BAND71</b>							
5 MHz	LCH	QPSK	RB1#0	20.502	0.11	3.00	Pass
			RB25#0	19.787	0.10	3.00	Pass
		16-QAM	RB1#0	19.515	0.09	3.00	Pass
			RB25#0	18.833	0.08	3.00	Pass
	MCH	QPSK	RB1#0	20.686	0.12	3.00	Pass
			RB25#0	19.978	0.10	3.00	Pass
		16-QAM	RB1#0	19.112	0.08	3.00	Pass
			RB25#0	18.930	0.08	3.00	Pass
	HCH	QPSK	RB1#0	20.571	0.11	3.00	Pass
			RB25#0	19.682	0.09	3.00	Pass
		16-QAM	RB1#0	19.341	0.09	3.00	Pass
			RB25#0	18.785	0.08	3.00	Pass
10 MHz	LCH	QPSK	RB1#0	20.873	0.12	3.00	Pass
			RB50#0	20.042	0.10	3.00	Pass
		16-QAM	RB1#0	20.162	0.10	3.00	Pass
			RB50#0	18.930	0.08	3.00	Pass
	MCH	QPSK	RB1#0	20.783	0.12	3.00	Pass
			RB50#0	19.865	0.10	3.00	Pass
		16-QAM	RB1#0	20.161	0.10	3.00	Pass
			RB50#0	18.978	0.08	3.00	Pass
	HCH	QPSK	RB1#0	20.912	0.12	3.00	Pass
			RB50#0	19.787	0.10	3.00	Pass
		16-QAM	RB1#0	20.120	0.10	3.00	Pass
			RB50#0	18.796	0.08	3.00	Pass
15 MHz	LCH	QPSK	RB1#0	20.795	0.12	1.00	Pass
			RB75#0	19.655	0.09	1.00	Pass
		16-QAM	RB1#0	20.122	0.10	1.00	Pass
			RB75#0	18.832	0.08	1.00	Pass
	MCH	QPSK	RB1#0	21.021	0.13	1.00	Pass
			RB75#0	19.862	0.10	1.00	Pass
		16-QAM	RB1#0	20.282	0.11	1.00	Pass
			RB75#0	18.903	0.08	1.00	Pass
	HCH	QPSK	RB1#0	20.691	0.12	1.00	Pass
			RB75#0	19.651	0.09	1.00	Pass
		16-QAM	RB1#0	20.084	0.10	1.00	Pass
			RB75#0	18.902	0.08	1.00	Pass
20 MHz	LCH	QPSK	RB1#0	20.852	0.12	1.00	Pass
			RB100#0	19.727	0.09	1.00	Pass
		16-QAM	RB1#0	20.075	0.10	1.00	Pass
			RB100#0	19.023	0.08	1.00	Pass
	MCH	QPSK	RB1#0	20.514	0.11	1.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE BAND71</b>							
			RB100#0	19.821	0.10	1.00	Pass
		16-QAM	RB1#0	20.102	0.10	1.00	Pass
			RB100#0	18.956	0.08	1.00	Pass
	HCH	QPSK	RB1#0	20.825	0.12	1.00	Pass
			RB100#0	19.937	0.10	1.00	Pass
		16-QAM	RB1#0	20.050	0.10	1.00	Pass
			RB100#0	19.113	0.08	1.00	Pass

## A.2 Field Strength of Spurious Radiation

Note 1: Only the worst data with different transmit bandwidth for LTE are shown here.

Note 2: The frequencies of verdict which are marked by "N/A" should be ignored because they are UE carrier frequency.

Note 3: Test plots please refer to the document "Annex No.: BL-SZ1880381-501 Data Part 1.pdf".

### WCDMA Mode Test Verdict

Test Band	Test Channel	Refer to Plot <sup>Note3</sup>	Verdict
WCDMA Band 2	LCH	1.1	Pass
	MCH	1.2	Pass
	HCH	1.3	Pass
WCDMA Band 4	LCH	2.1	Pass
	MCH	2.2	Pass
	HCH	2.3	Pass

## LTE Mode Test Verdict

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to Plot <sup>Note3</sup>	Verdict
Band 2	1.4 MHz	MCH	QPSK	RB1#0	3.1	Pass
	3 MHz	MCH	QPSK	RB1#0	3.2	Pass
	5 MHz	MCH	QPSK	RB1#0	3.3	Pass
	10 MHz	MCH	QPSK	RB1#0	3.4	Pass
	15 MHz	MCH	QPSK	RB1#0	3.5	Pass
	20 MHz	MCH	QPSK	RB1#0	3.6	Pass
Band 4	1.4 MHz	MCH	QPSK	RB1#0	4.1	Pass
	3 MHz	MCH	QPSK	RB1#0	4.2	Pass
	5 MHz	MCH	QPSK	RB1#0	4.3	Pass
	10 MHz	MCH	QPSK	RB1#0	4.4	Pass
	15 MHz	MCH	QPSK	RB1#0	4.5	Pass
	20 MHz	MCH	QPSK	RB1#0	4.6	Pass
Band 12	1.4 MHz	MCH	QPSK	RB1#0	5.1	Pass
	3 MHz	MCH	QPSK	RB1#0	5.2	Pass
	5 MHz	MCH	QPSK	RB1#0	5.3	Pass
	10 MHz	MCH	QPSK	RB1#0	5.4	Pass
Band 66	1.4 MHz	MCH	QPSK	RB1#0	6.1	Pass
	3 MHz	MCH	QPSK	RB1#0	6.2	Pass
	5 MHz	MCH	QPSK	RB1#0	6.3	Pass
	10 MHz	MCH	QPSK	RB1#0	6.4	Pass
	15 MHz	MCH	QPSK	RB1#0	6.5	Pass
	20 MHz	MCH	QPSK	RB1#0	6.6	Pass
Band 71	5 MHz	MCH	QPSK	RB1#0	7.1	Pass
	10 MHz	MCH	QPSK	RB1#0	7.2	Pass
	15 MHz	MCH	QPSK	RB1#0	7.3	Pass
	20 MHz	MCH	QPSK	RB1#0	7.4	Pass

## **ANNEX B TEST SETUP PHOTOS**

Please refer to the document "BL-SZ1880381-AR2.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer to the document "BL-SZ1880381-AW.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer to the document "BL-SZ1880381-AI.PDF".

--END OF REPORT--