



## 蓝牙耳机使用说明书 Bluetooth Earphone User Guide



Model No.:FB1

简体中文 蓝牙耳机使用说明书


### 规格参数

型号	FB1
蓝牙版本	Bluetooth V4.1
蓝牙音频解码	APT-X, AAC, SBC
工作时长	约 8 hrs
充电输入	DC 5V 500mA
充电时间	< 2 hrs
类型	动圈(13mm)
频率响应	20Hz-20KHz
灵敏度	103dB/mW
阻抗	32Ω
重量	约 20g

### 产品接口介绍

- A、音量+/上一曲 (长按)
- B、状态指示灯 (红、蓝灯)
- C、开关机/配对/播放/暂停/通话
- D、音量-/下一曲 (长按)
- E、Micro USB充电口
- F、麦克风

简体中文 蓝牙耳机使用说明书

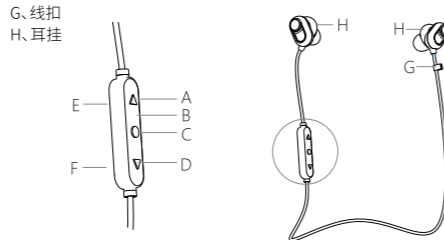

### 包装清单

- 1、耳机 x1条
- 2、USB充电线 x1条
- 3、耳套 x3对
- 4、耳挂 x3对
- 5、说明书 x1本
- 6、售后维修卡 x1本
- 7、收纳包 x1个

简体中文 蓝牙耳机使用说明书

### 佩戴说明



- 请先安装大小合适的耳机套和耳挂；
- 耳机套朝前，放入耳道口位置；
- 轻微转动耳机，调整到最舒适状态。

### 使用说明

#### (一)、开机/关机

开机: 按住●键约3秒，蓝灯快闪三次，耳机响起提示音。  
关机: 按住●键约3秒，红灯常亮2秒后关机，耳机响起提示音。  
复位: 充电状态下，长按▲键约3秒，红蓝灯同时闪烁且有提示音响起。  
注意: 若开机后或与设备断开连接后10min内未连接到任何设备，耳机会自动关机，以节省电量。

简体中文 蓝牙耳机使用说明书

### (二)、配对/连接

与蓝牙耳机配对  
在连接蓝牙耳机使用之前，需令耳机与蓝牙耳机配对，步骤如下：  
1、耳机关机状态下，按住●键约5秒，红蓝灯交替闪烁时松开，进入配对模式。  
2、开启手机蓝牙功能，搜索蓝牙设备。选择“FiiO FB1”即可配对连接。

#### 一拖二连接

同时连接两个蓝牙设备，操作方法如下：  
1. 首先将耳机与设备一配对连接。  
2. 重启耳机并进入配对模式，与设备二配对连接。  
3. 从设备一上操作，选择连接此耳机。此时，耳机已经同时连接了设备一和设备二。  
注意：  
●关闭一配二功能：待机未连接设备时，同时按●键和▼键约4秒，听到提示音后释放。  
●开启一配二功能：待机未连接设备时，同时按●键和▲键约4秒，听到提示音后释放。

简体中文 蓝牙耳机使用说明书

### (三)、使用耳机通话

1、基本通话操作  
取消呼叫：短按●键一次  
接听来电：短按●键一次  
拒接来电：长按●键约2秒  
结束通话：短按●键一次  
增加音量：短按▲键  
减少音量：短按▼键  
通话传手机：长按●键约2秒  
通话传耳机：长按●键约2秒  
麦克风静音：长按▲键约2秒  
取消麦克风静音：长按▲键约2秒  
未码重拨：双击●键  
2、三方通话操作  
接听新来电挂断当前通话：短按●键一次  
接听新来电保留当前通话：双击●键  
通话切换：双击●键  
结束当前通话切至保留的通话：短按●键一次

简体中文 蓝牙耳机使用说明书

3、连接两个手机通话  
挂断第一个手机通话，接通第二个手机来电：短按●键一次  
保留第一个手机通话，接通第二个手机来电：双击●键  
切换通话：双击●键  
挂断当前通话，回到被保留的手机：短按●键一次

### 指示灯

配对状态：红蓝灯交替闪烁  
未连接设备：蓝灯每2秒快闪2次  
已连接设备：蓝灯每2.5秒闪1次  
低电量：红灯闪烁  
正在充电：红灯恒亮

### 了解更多

若要了解有关产品信息请访问网址：[www.fiiio.net](http://www.fiiio.net)

English Bluetooth Earphone User Guide

### Specifications


Model No.	FB1
Bluetooth Version	Bluetooth V4.1
Bluetooth Codec	APT-X, AAC, SBC
Play Time	Approx. 8 hrs
Power Supply	DC 5V 500mA
Charging Time	< 2 hrs
Type	Dynamic (13mm)
Frequency Response	20Hz-20KHz
Sensitivity	103dB/mW
Impedance	32Ω
Weight	Approx. 20g

### Buttons and Ports Labeled

- A. Vol+/Previous track (hold)
- B. Indicator (Red/Blue Light)
- C. Power on/off/Pair/Play/Pause/Call
- D. Vol-/Next track (hold)
- E. Micro USB Charging Port
- F. Microphone

English Bluetooth Earphone User Guide

G. Cable Clip  
H. Ear Hook

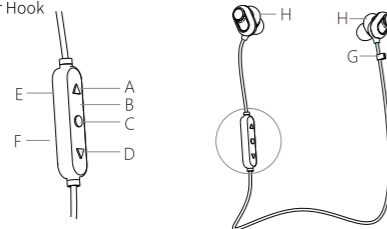

### List of items included in the package

- 1. Earphone x 1pc
- 2. USB charging cable x 1pc
- 3. Ear tip x 3 pairs
- 4. Ear hook x 3 pairs
- 5. User guide x 1pc
- 6. Warranty card x 1pc
- 7. Carrying case x 1pc

English Bluetooth Earphone User Guide

### Wearing instructions



- Please first install a set of ear tips and ear hooks of suitable size.
- Put the earphone into the ear canal.
- Adjust the earphone until you feel most comfortable.

### How to Use

#### A. Powering On/Off

- Power On: Hold the ● button for 3 seconds, the indicator flashes blue 3 times; the FB1 powers on after the notification tone.
- Power Off: Hold the ● button for 3 seconds, the indicator lights red for 2 seconds; the FB1 powers off after the notification tone.
- Reset: Hold the ▲ button for 3 seconds when charging; the indicator flashes red and blue simultaneously and the notification tone rings.

English Bluetooth Earphone User Guide

### Note:

If it's not connected to any device for 10 minutes after powering on or disconnect from the device, the FB1 will power off automatically to save power.

### B. Pairing

1. Pairing with Bluetooth smart phone  
Before used with the Bluetooth smart phone, the FB1 should be paired with the smart phone with following steps:  
1) While the FB1 is powered off, hold the ● button for 5 seconds until the indicator flashes blue and red alternately; the FB1 enters the pairing mode.  
2) Turn on the Bluetooth function on the smart phone and search for Bluetooth devices. Choose "FiiO FB1" to pair with it.

#### 2. Pairing with two Bluetooth devices simultaneously (One-to-two mode)

- Pair the FB1 with Device 1
- Restart the FB1 and enter pairing mode to pair with Device 2
- Choose "FiiO FB1" to connect on Device 1. Once done, the FB1 would be connected to the both devices simultaneously already.

English Bluetooth Earphone User Guide

### Note:

- How to turn off one-to-two mode: When it's in sleep mode and not connecting to any device, hold ● and ▼ simultaneously for about 4 seconds until the notification tone is heard.
- How to turn on one-to-two mode: When it's in sleep mode and not connecting to any device, hold ● and ▲ simultaneously for about 4 seconds until the notification tone is heard.

### C. Making Phone Calls

1. Basic Operation  
Cancel the dialing : Press ● button briefly once  
Answer a call : Press ● button briefly once  
Decline a call : Hold ● button for 2 seconds  
End a call : Press ● button briefly once  
Volume up : Press ▲ button briefly  
Volume down : Press ▼ button briefly  
Switch the call to the Phone: Hold ● button for 2 seconds  
Switch the call to the FB1: Hold ● button for 2 seconds  
Mute the microphone: Hold ▲ button for 2 seconds  
Unmute the microphone : Hold ▲ button for 2 seconds  
Last number redial: Double press ● button

English Bluetooth Earphone User Guide

### 2.Three-way calling

End the first call and answer the new one: Press ● button briefly once  
Put the first call on hold and answer the new one :  
Double press ● button  
Switch between calls: Double press ● button  
End the second call and switch to the call on hold:  
Press ● button briefly once  
3. Answer phone calls when connected to two phones  
End the call on the first phone and answer the new call on the second phone : Press ● button briefly once  
Put the call on the first phone on hold and answer the new call on the second phone : Double press ● button  
Switch between calls from different phones:  
Double press ● button  
End the current call and switch to the call on hold:  
Press ● button briefly once

English Bluetooth Earphone User Guide

### Indicator

Pairing mode: Flash blue and red alternately  
Not connecting to any device: Flash blue twice every 2 seconds  
Connected successfully: Flash blue once every 2.5 seconds  
Low battery: Flash red  
Charging: Red light stays steadily on

To learn more about the product, please visit our website:  
[www.fiiio.net](http://www.fiiio.net).

**FCC Compliance Statement:** This device complies with Part 15 of the FCC rules. Operation is subjected to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.