



Appendix A

RF Test Data for BLE (Conducted Measurement)

Product Name: AXO POWER METER

Test Model: axo-pm013

Environmental Conditions

Temperature:	23.5 ° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Ling Zhu
Supervised by:	Li Huan
	Li Huan





A.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant	0.652	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant	0.642	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant	0.638	≥ 0.5	Pass
NVNT	BLE 2M	2402	Ant	1.084	≥ 0.5	Pass
NVNT	BLE 2M	2440	Ant	1.036	≥ 0.5	Pass
NVNT	BLE 2M	2480	Ant	1.087	≥ 0.5	Pass






Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant

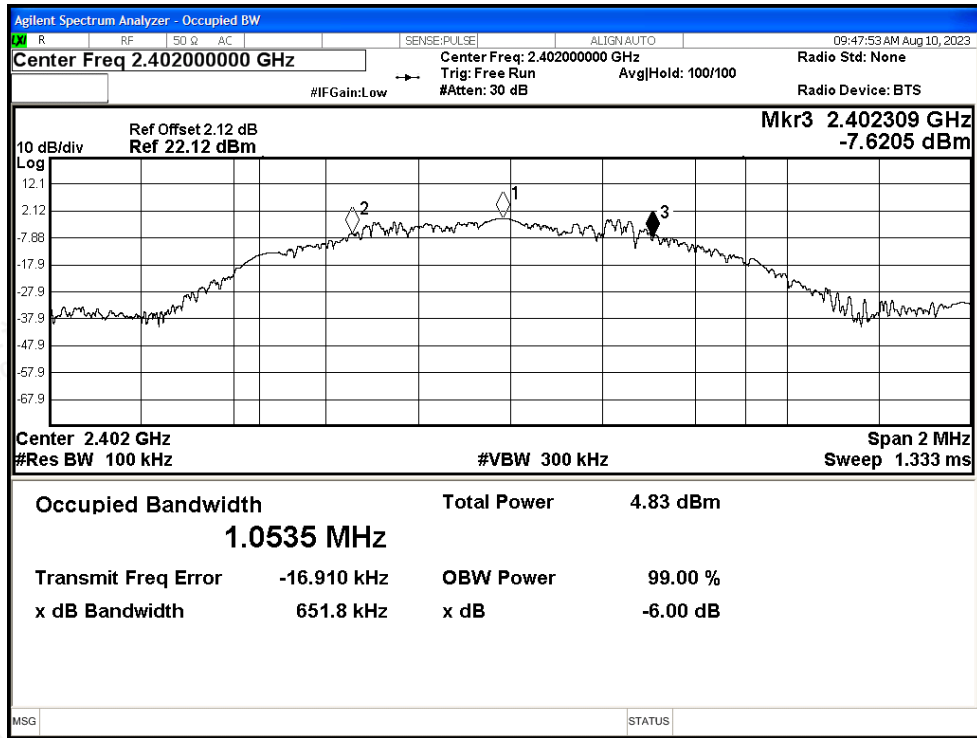


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant

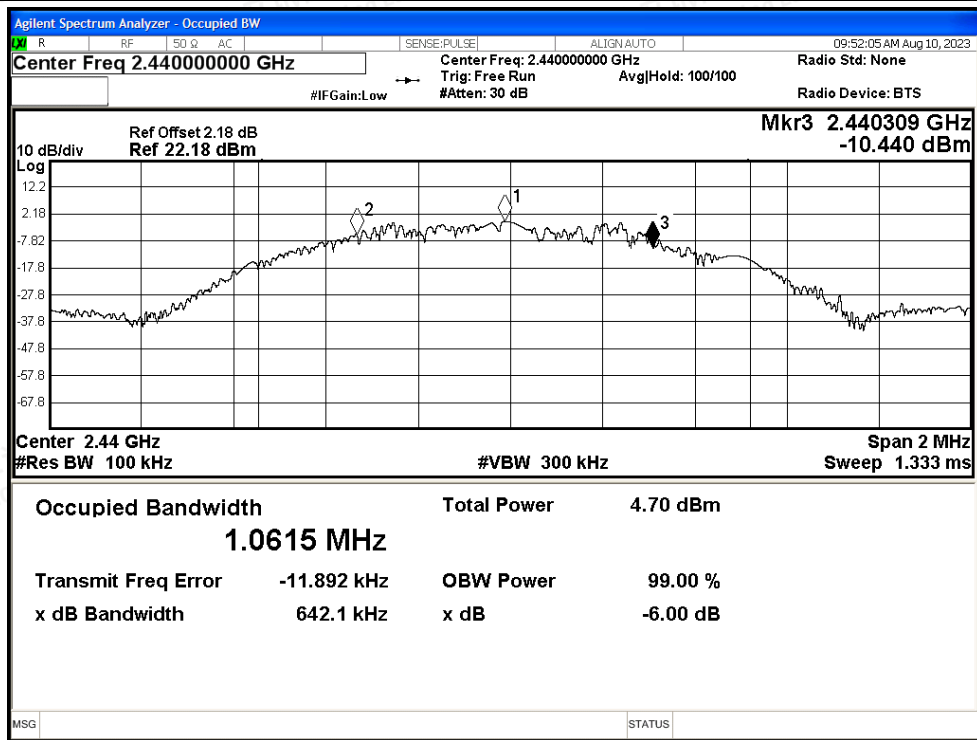




-6dB Bandwidth NVNT BLE 1M 2480MHz Ant

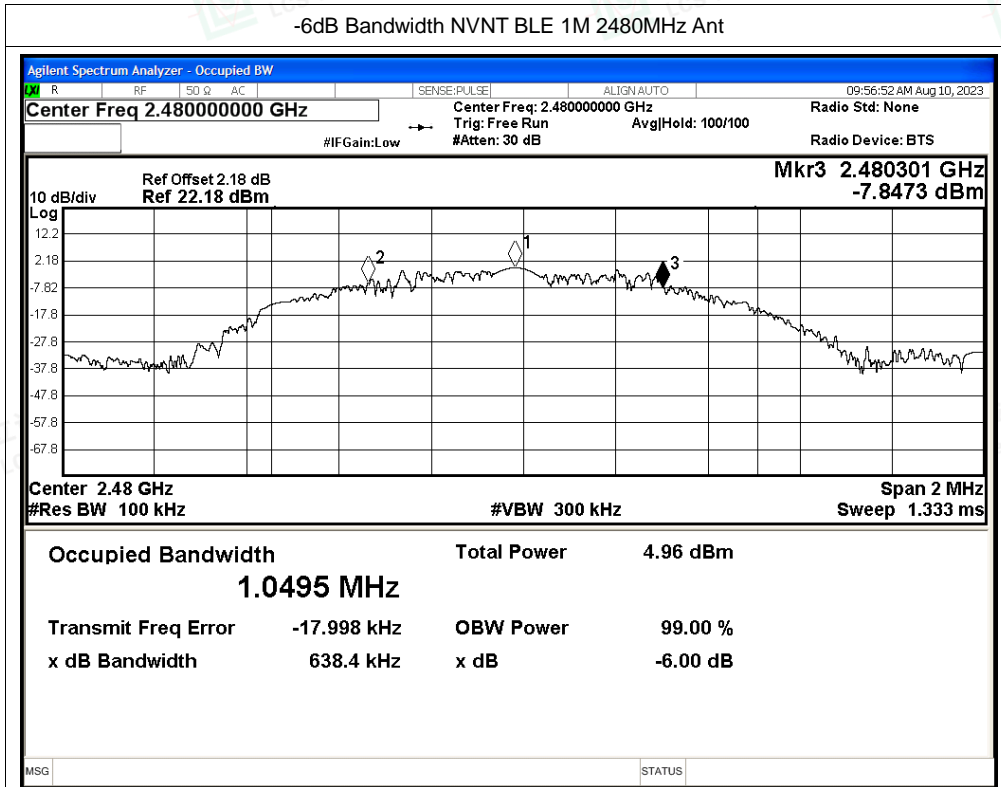


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant

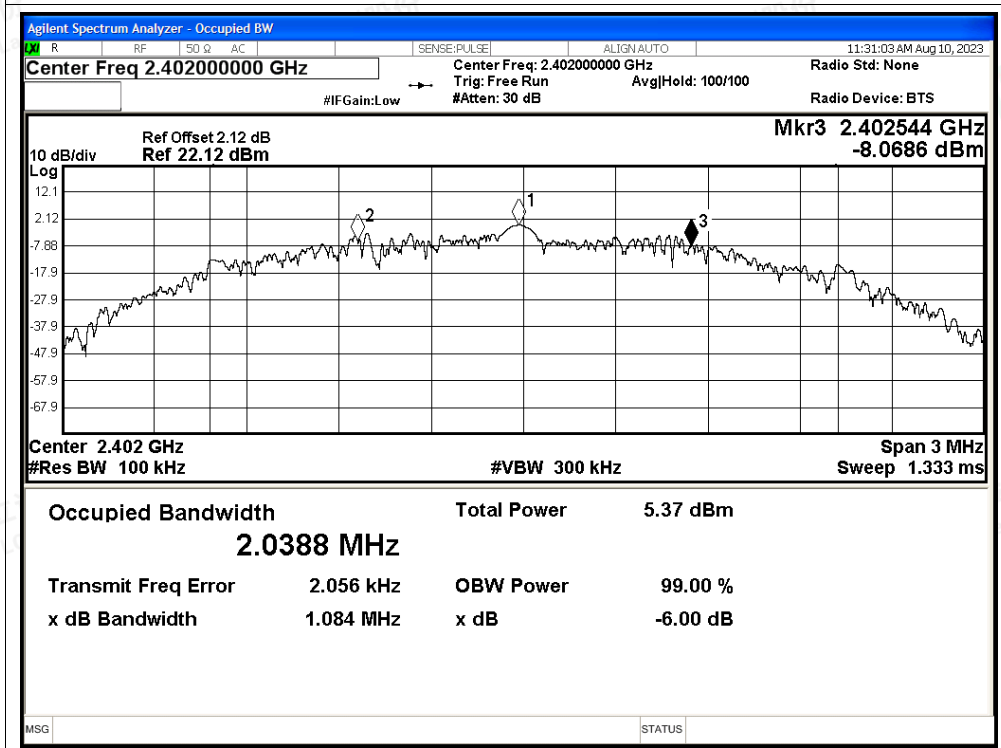




-6dB Bandwidth NVNT BLE 2M 2440MHz Ant

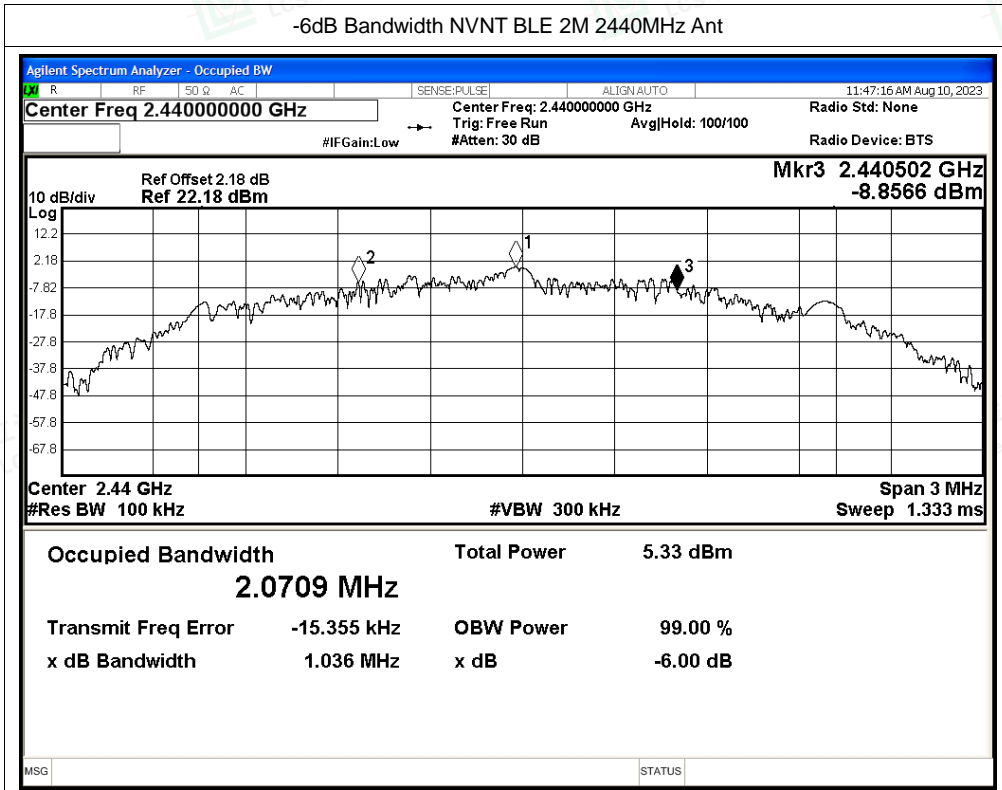

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant

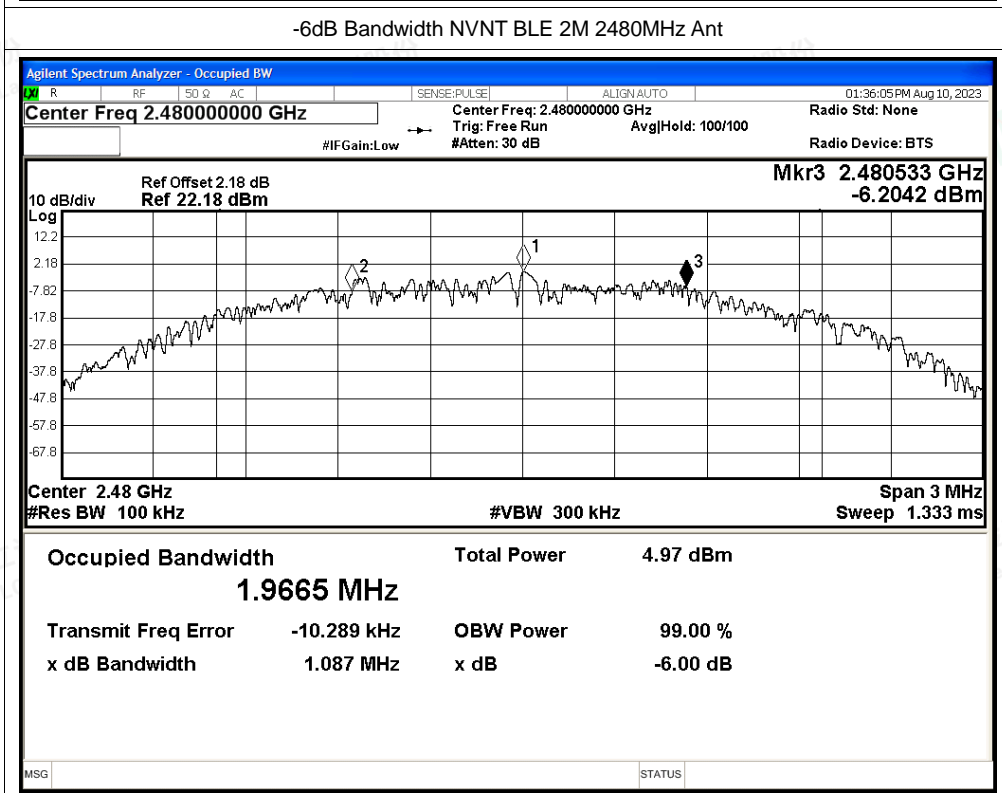



A.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant	-0.19	30	Pass
NVNT	BLE 1M	2440	Ant	-0.02	30	Pass
NVNT	BLE 1M	2480	Ant	0.14	30	Pass
NVNT	BLE 2M	2402	Ant	0.35	30	Pass
NVNT	BLE 2M	2440	Ant	0.47	30	Pass
NVNT	BLE 2M	2480	Ant	0.54	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

Power NVNT BLE 1M 2402MHz Ant

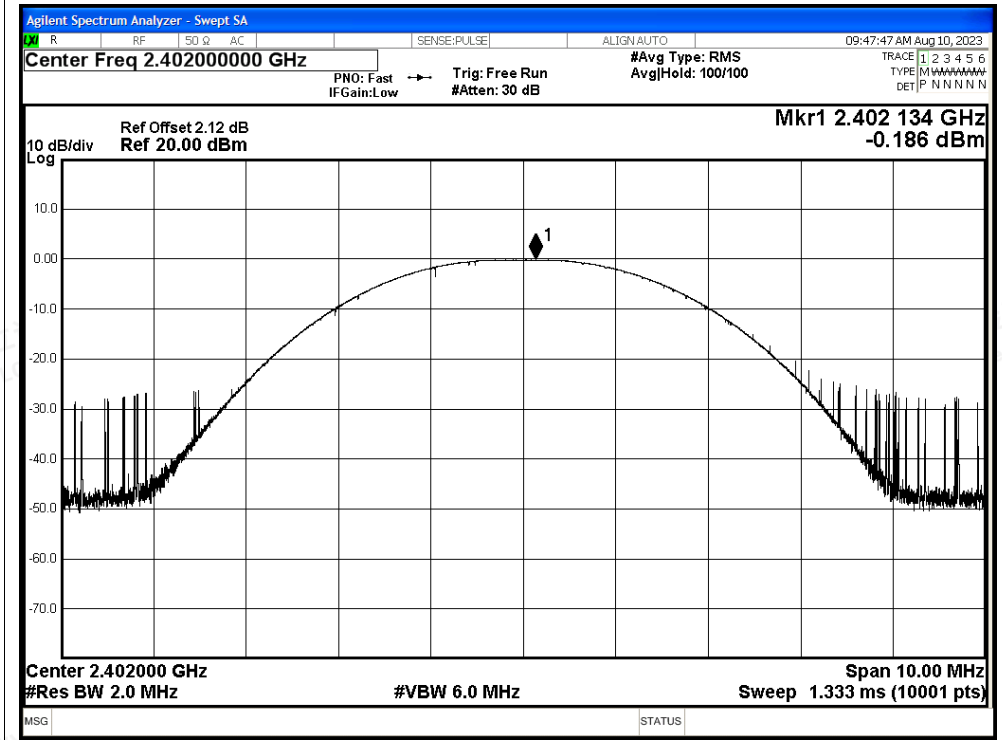


Power NVNT BLE 1M 2440MHz Ant

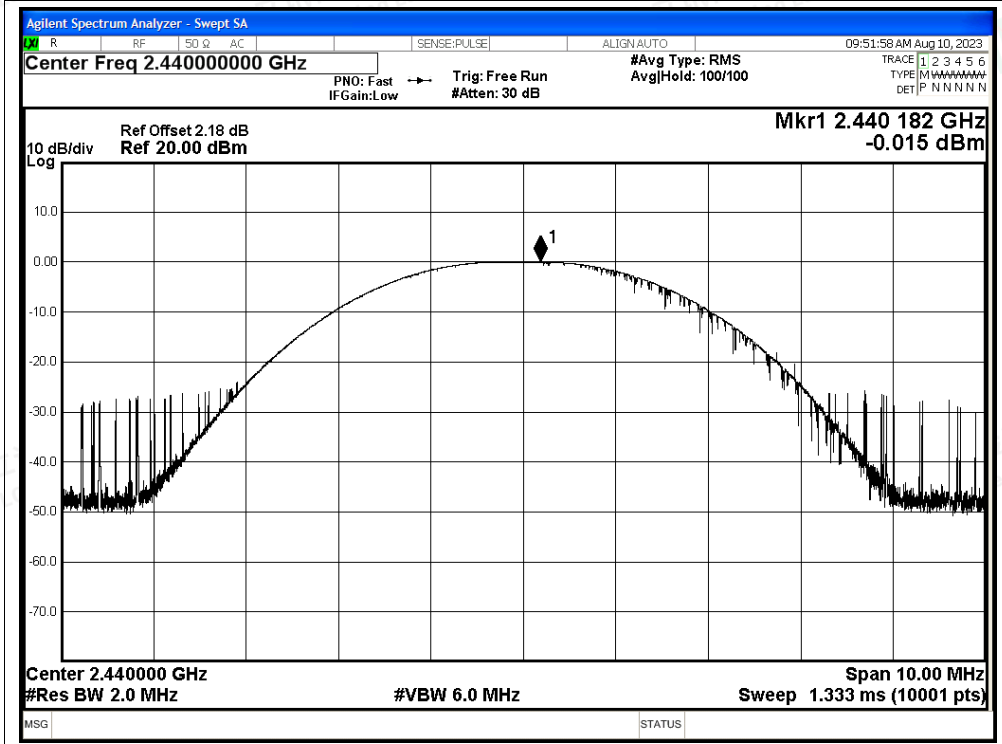




Power NVNT BLE 1M 2480MHz Ant

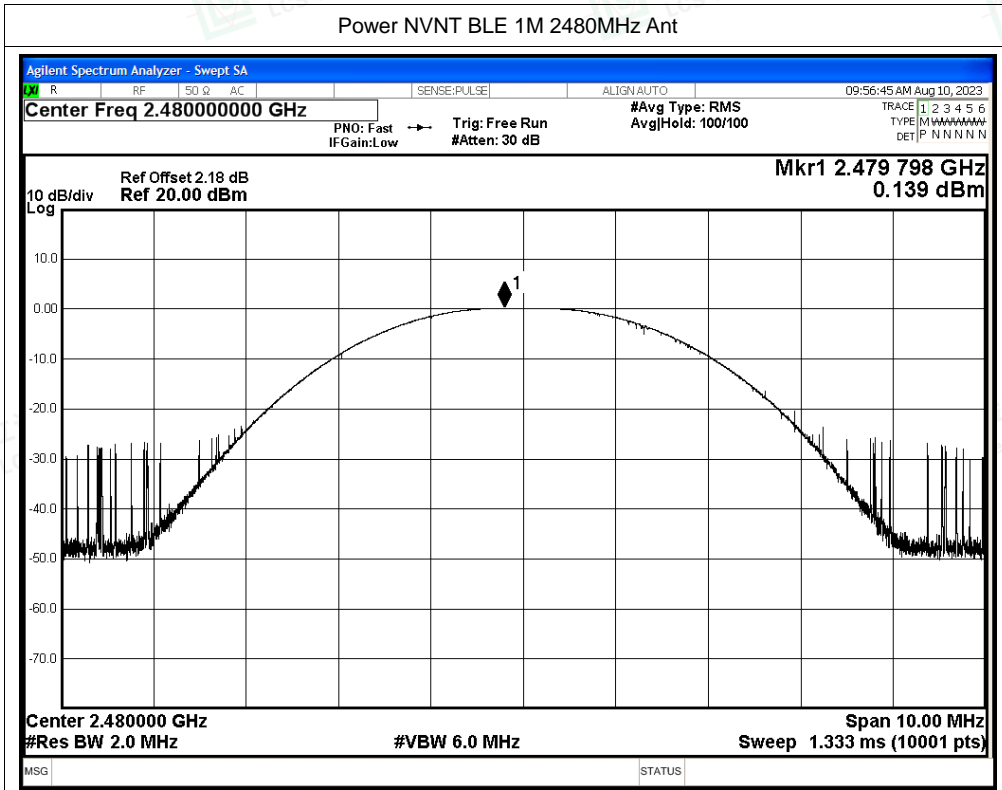


Power NVNT BLE 2M 2402MHz Ant

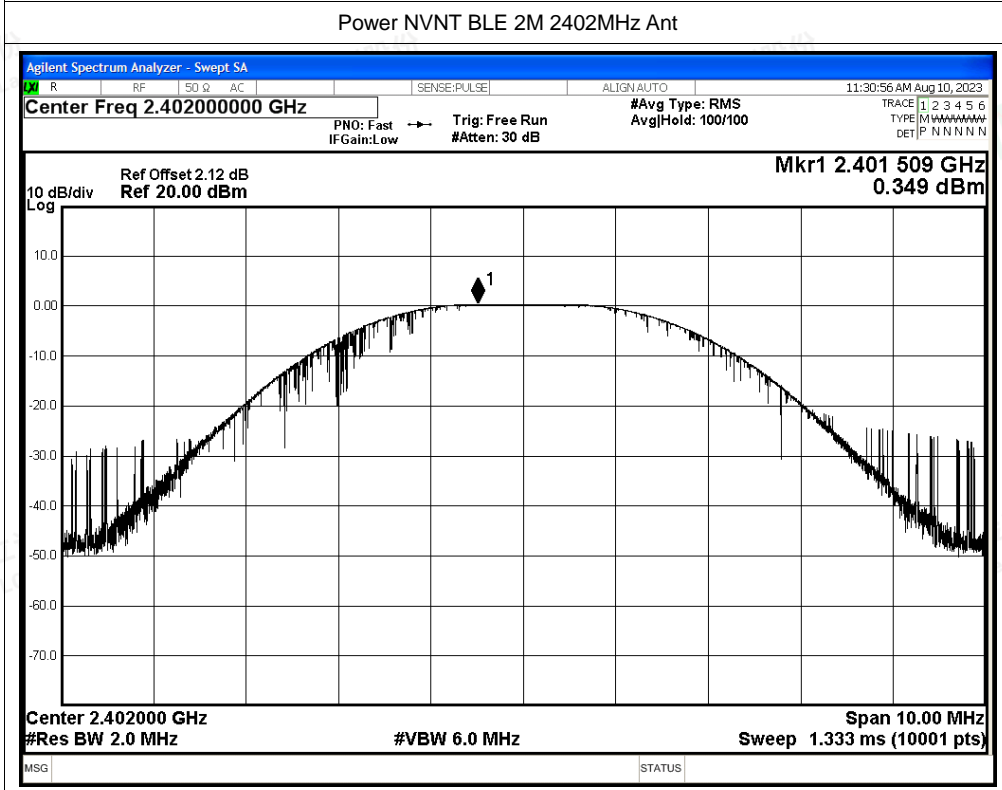




Power NVNT BLE 2M 2440MHz Ant

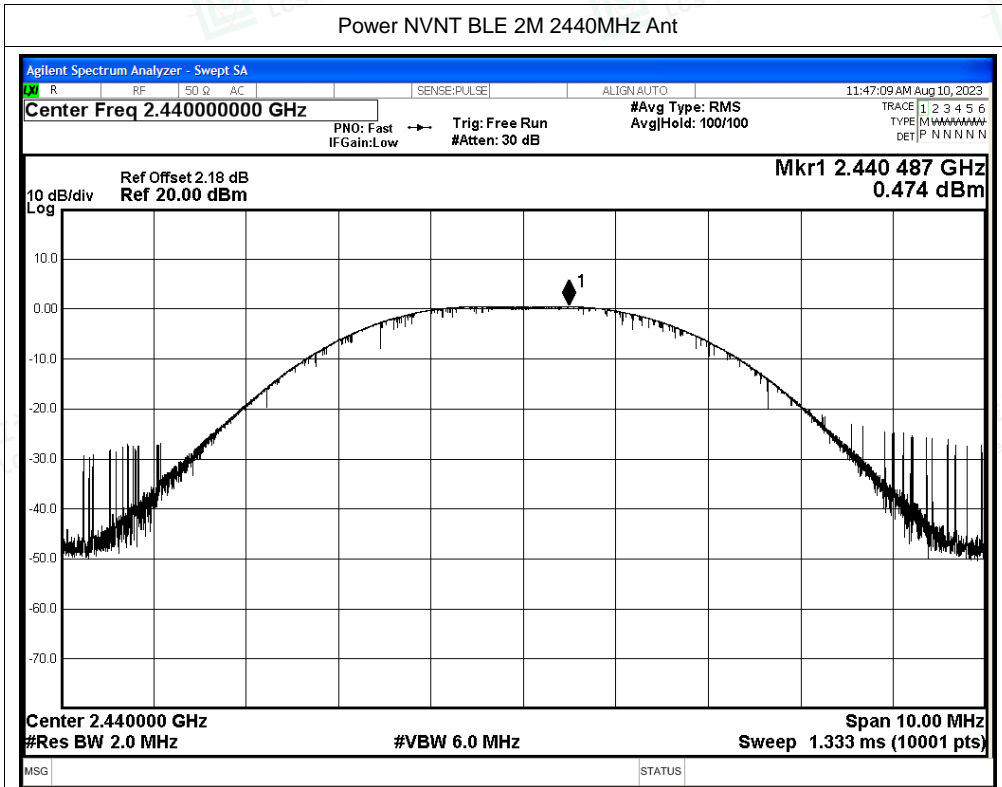

Power NVNT BLE 2M 2480MHz Ant

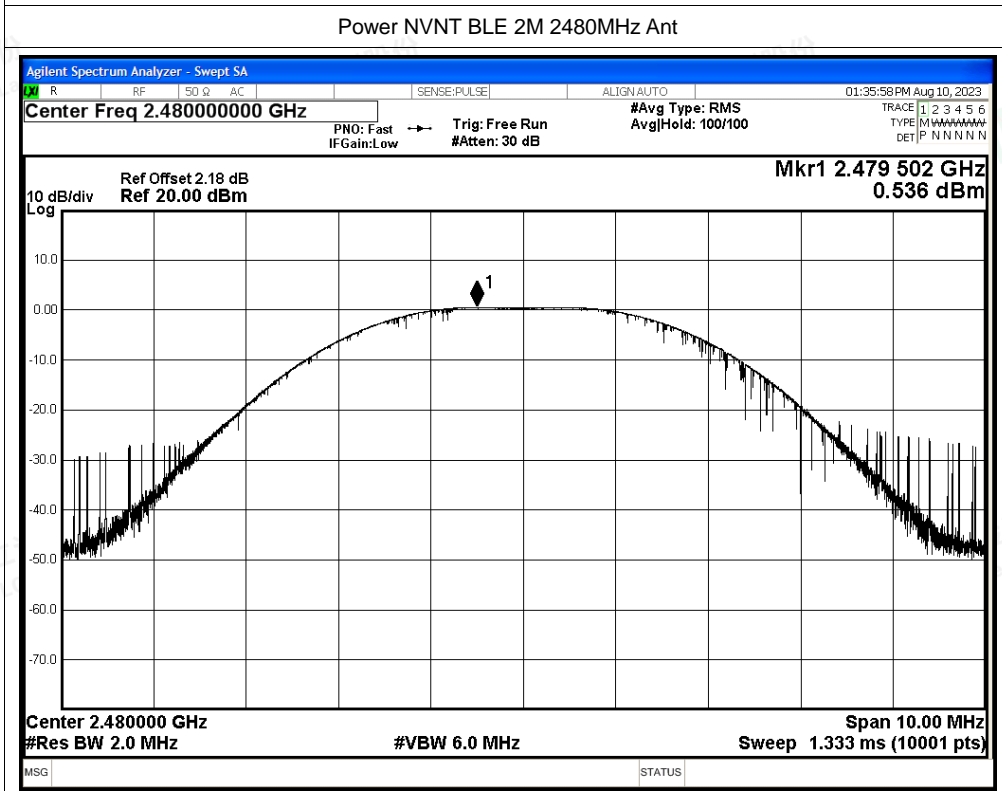



A.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant	-12.75	8	Pass
NVNT	BLE 1M	2440	Ant	-12.94	8	Pass
NVNT	BLE 1M	2480	Ant	-11.97	8	Pass
NVNT	BLE 2M	2402	Ant	-16.64	8	Pass
NVNT	BLE 2M	2440	Ant	-16.49	8	Pass
NVNT	BLE 2M	2480	Ant	-16.58	8	Pass






Test Graphs

PSD NVNT BLE 1M 2402MHz Ant




PSD NVNT BLE 1M 2440MHz Ant

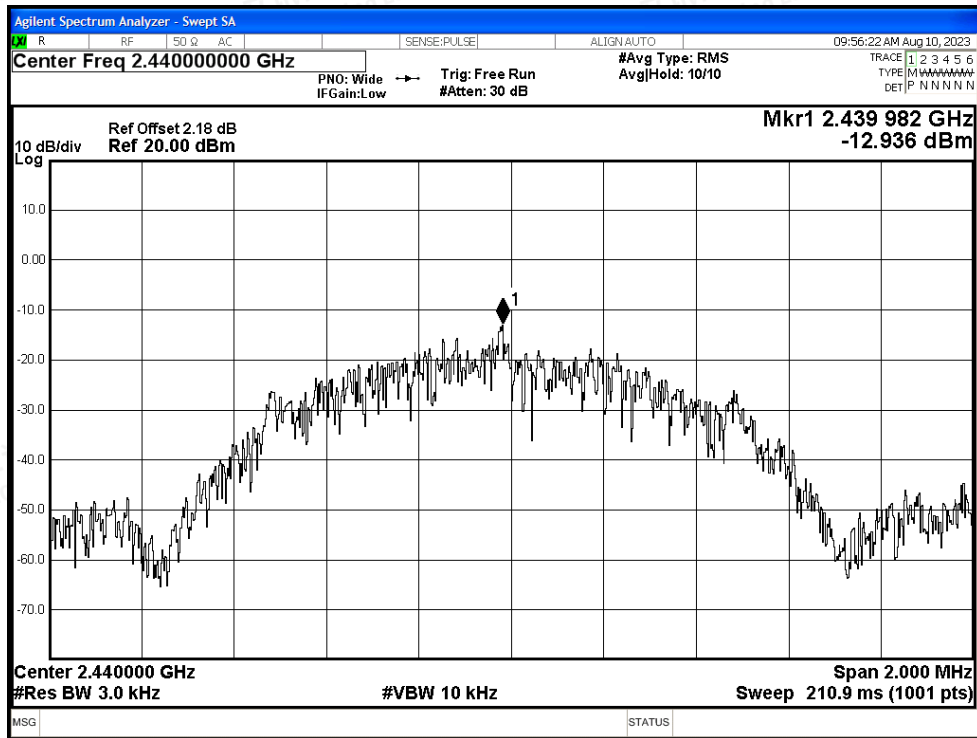




PSD NVNT BLE 1M 2480MHz Ant

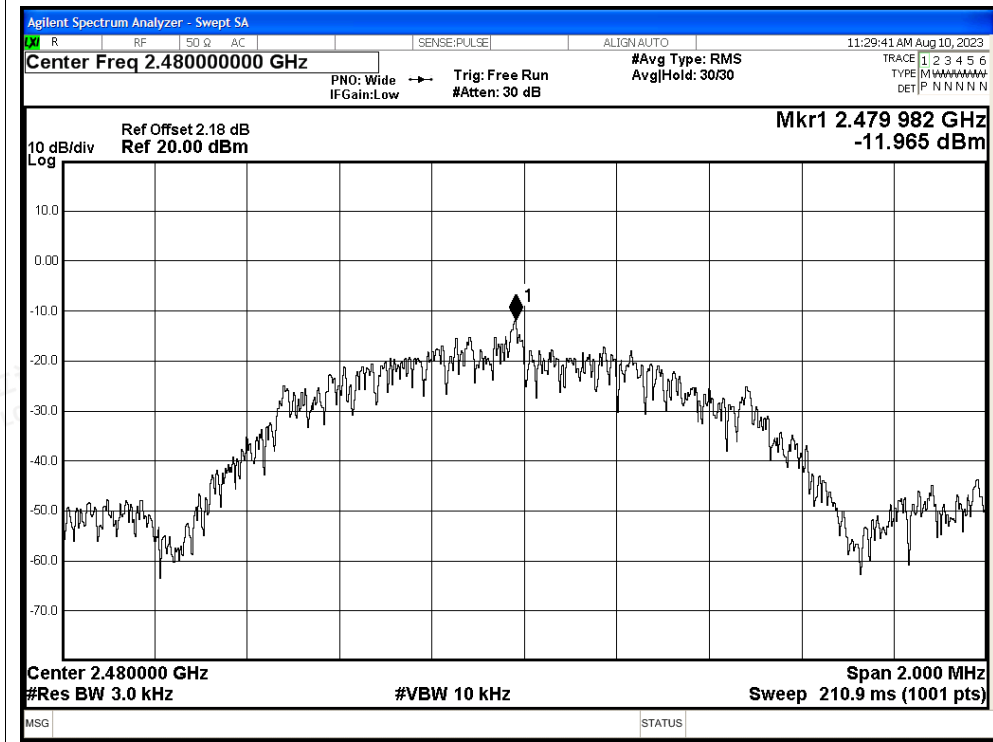


PSD NVNT BLE 2M 2402MHz Ant

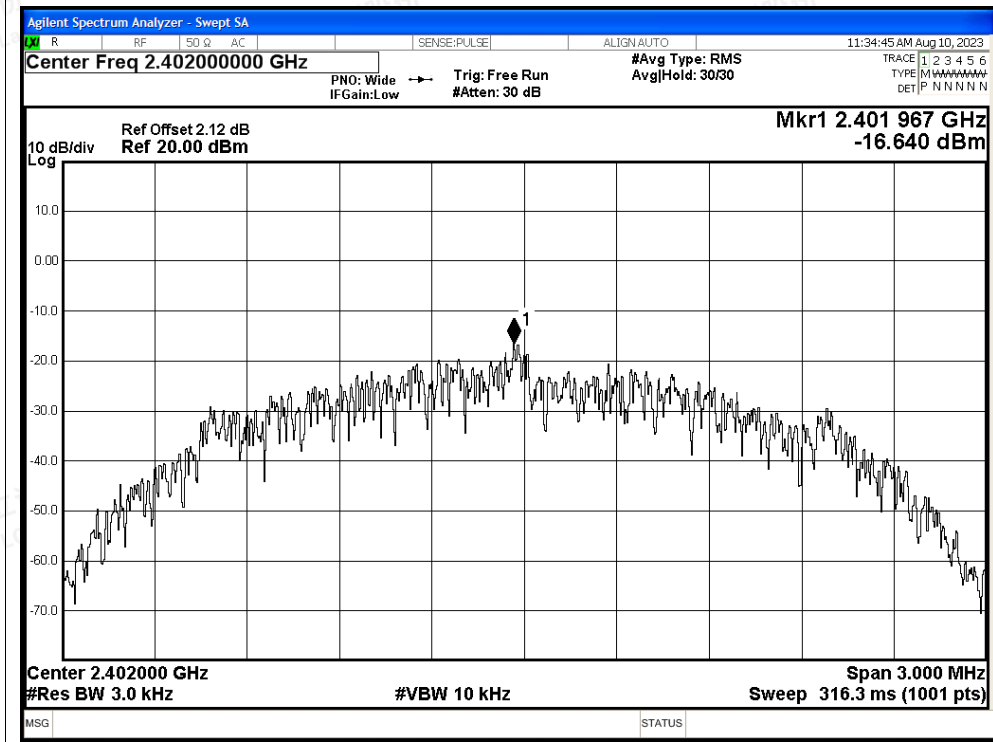




PSD NVNT BLE 2M 2440MHz Ant

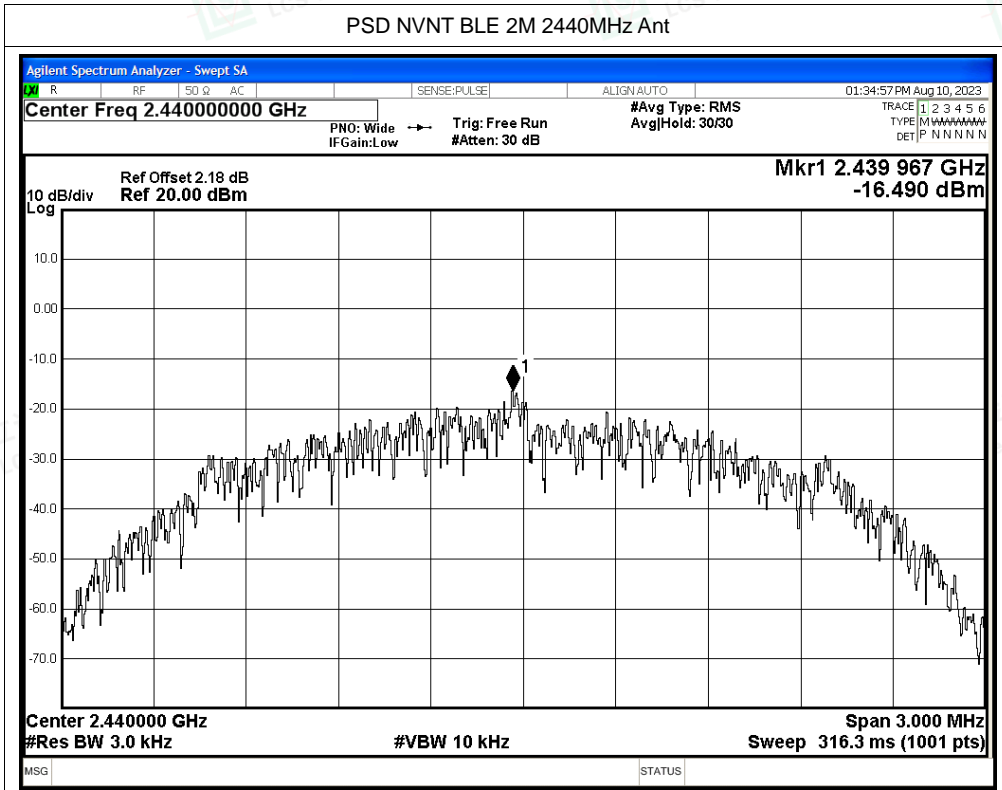

PSD NVNT BLE 2M 2480MHz Ant

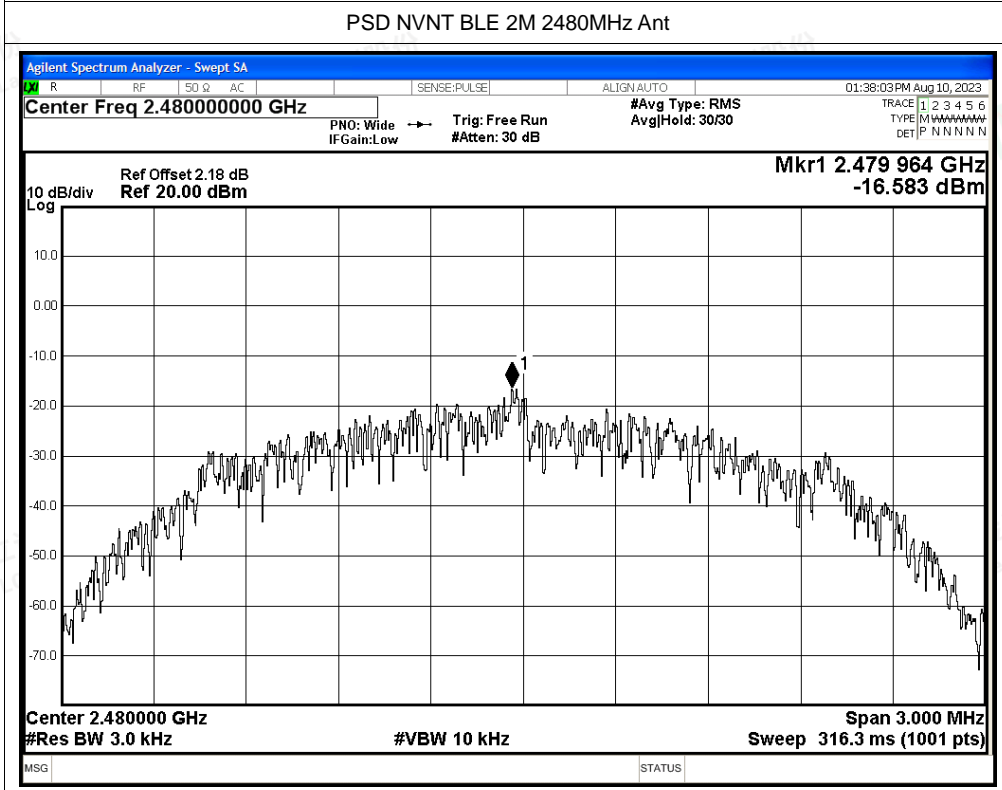



A.4 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant	-44.92	-20	Pass
NVNT	BLE 1M	2480	Ant	-43.99	-20	Pass
NVNT	BLE 2M	2402	Ant	-31.78	-20	Pass
NVNT	BLE 2M	2480	Ant	-45.78	-20	Pass






Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant Ref

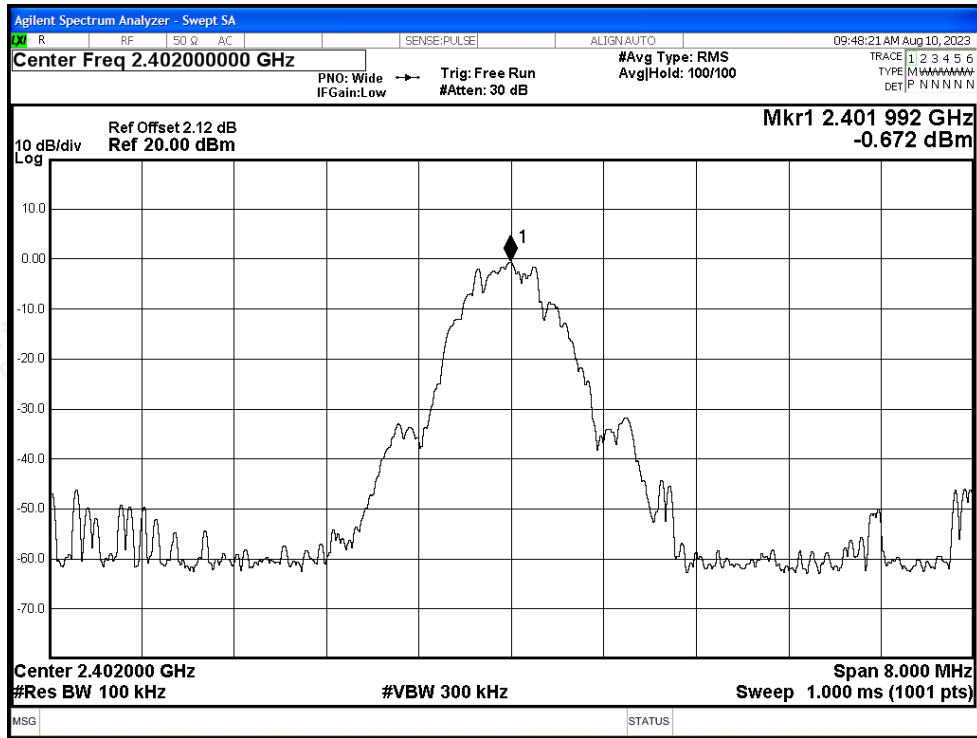


Band Edge NVNT BLE 1M 2402MHz Ant Emission

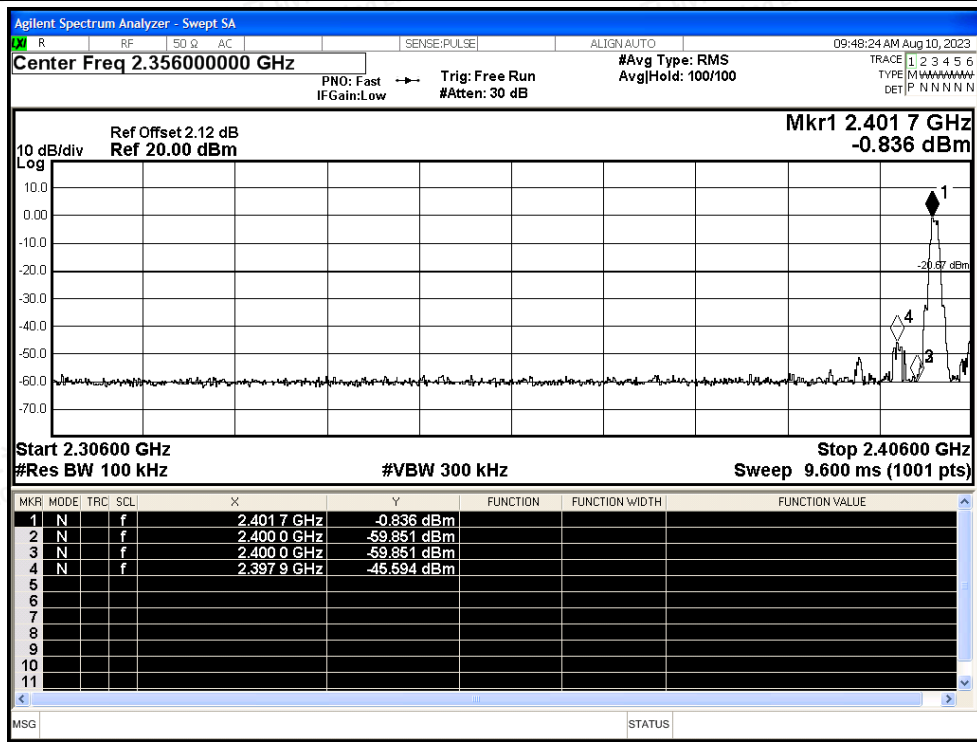




Band Edge NVNT BLE 1M 2480MHz Ant Ref

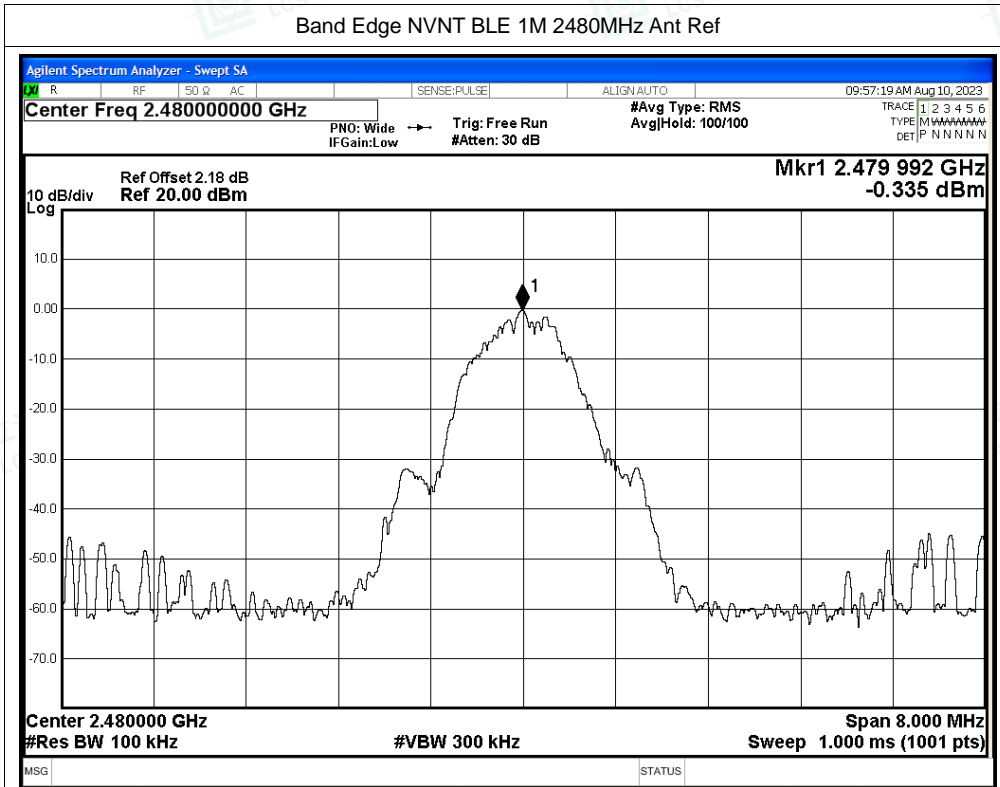


Band Edge NVNT BLE 1M 2480MHz Ant Emission

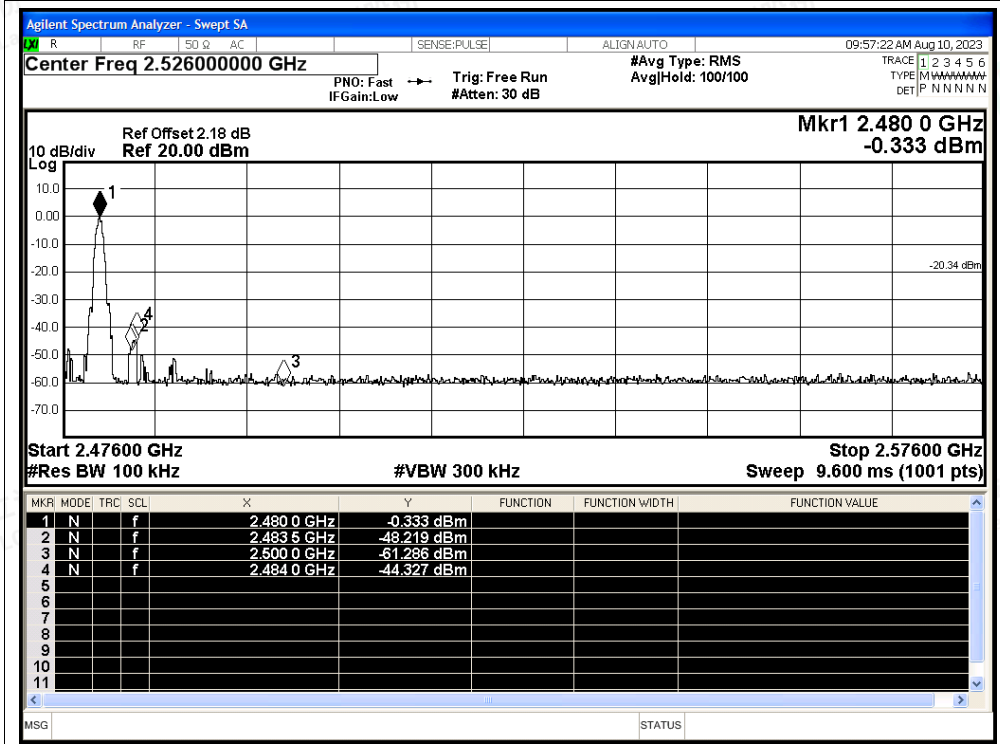




Band Edge NVNT BLE 2M 2402MHz Ant Ref

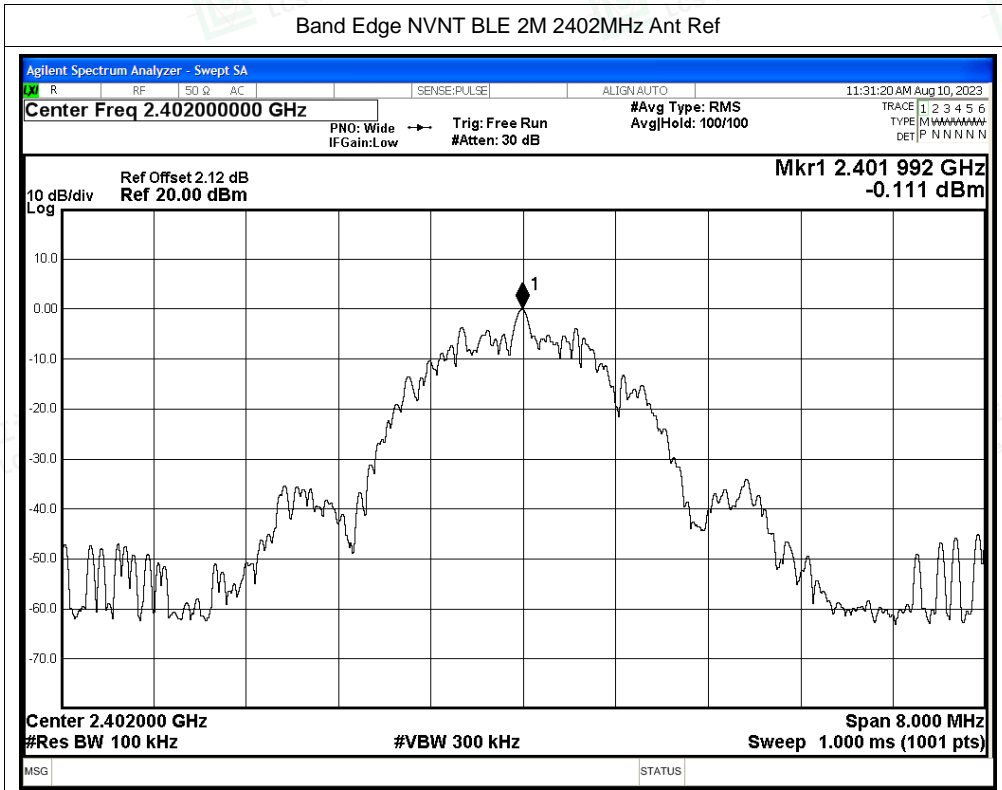

Band Edge NVNT BLE 2M 2402MHz Ant Emission

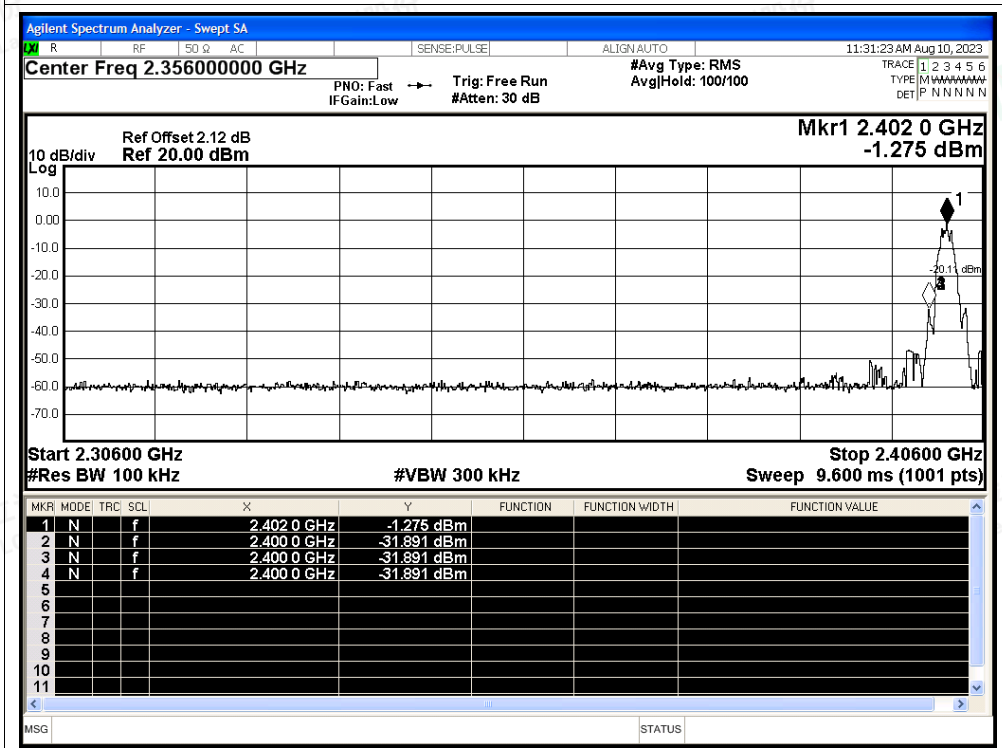




Band Edge NVNT BLE 2M 2480MHz Ant Ref



Band Edge NVNT BLE 2M 2480MHz Ant Emission

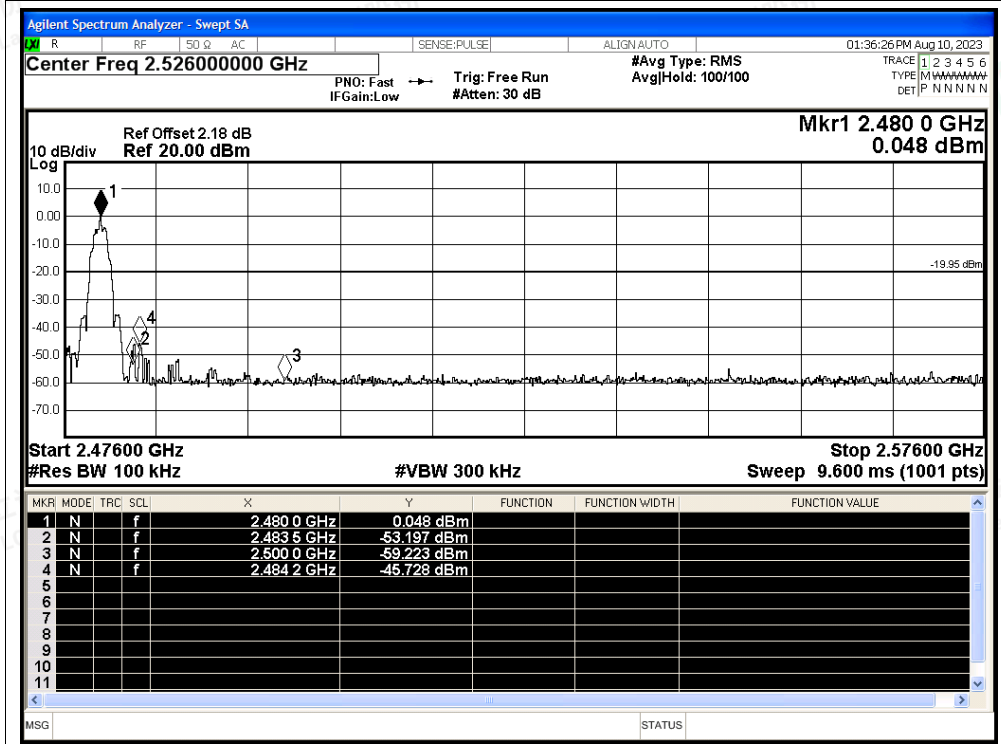



A.5 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant	-51.24	-20	Pass
NVNT	BLE 1M	2440	Ant	-51.11	-20	Pass
NVNT	BLE 1M	2480	Ant	-55.27	-20	Pass
NVNT	BLE 2M	2402	Ant	-49.63	-20	Pass
NVNT	BLE 2M	2440	Ant	-49.17	-20	Pass
NVNT	BLE 2M	2480	Ant	-55.57	-20	Pass






Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant Ref

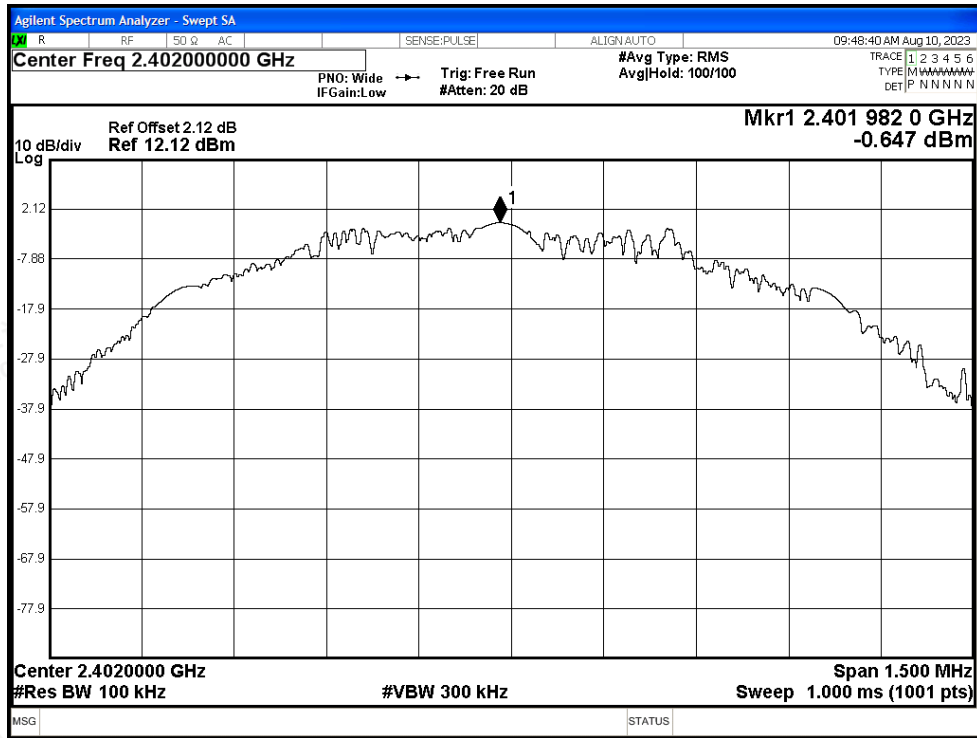


Tx. Spurious NVNT BLE 1M 2402MHz Ant Emission

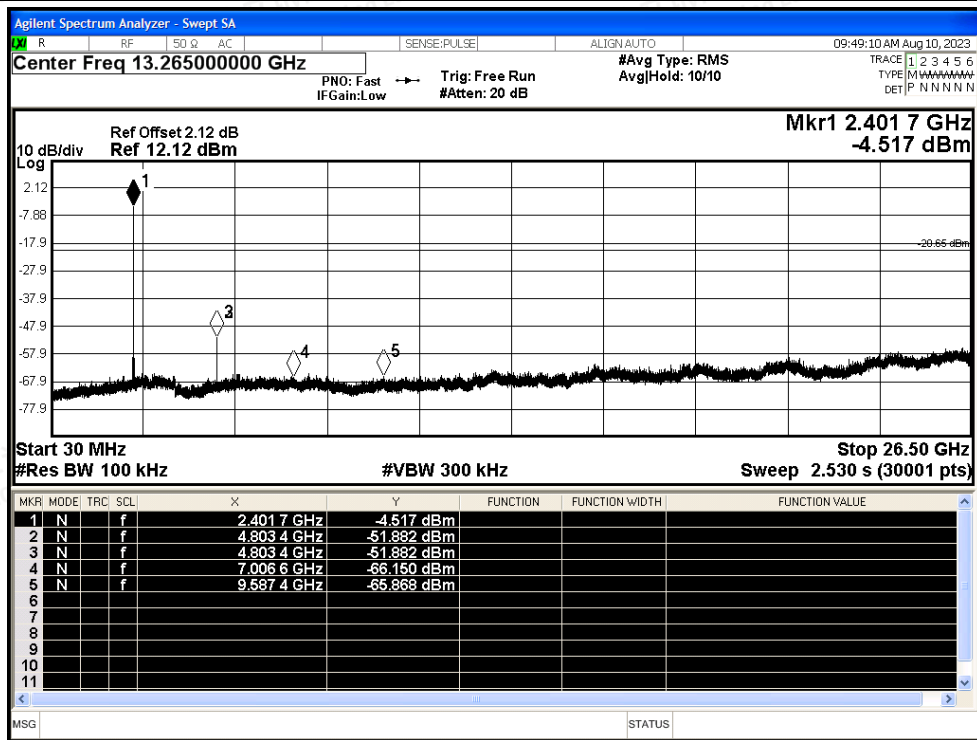




Tx. Spurious NVNT BLE 1M 2440MHz Ant Ref

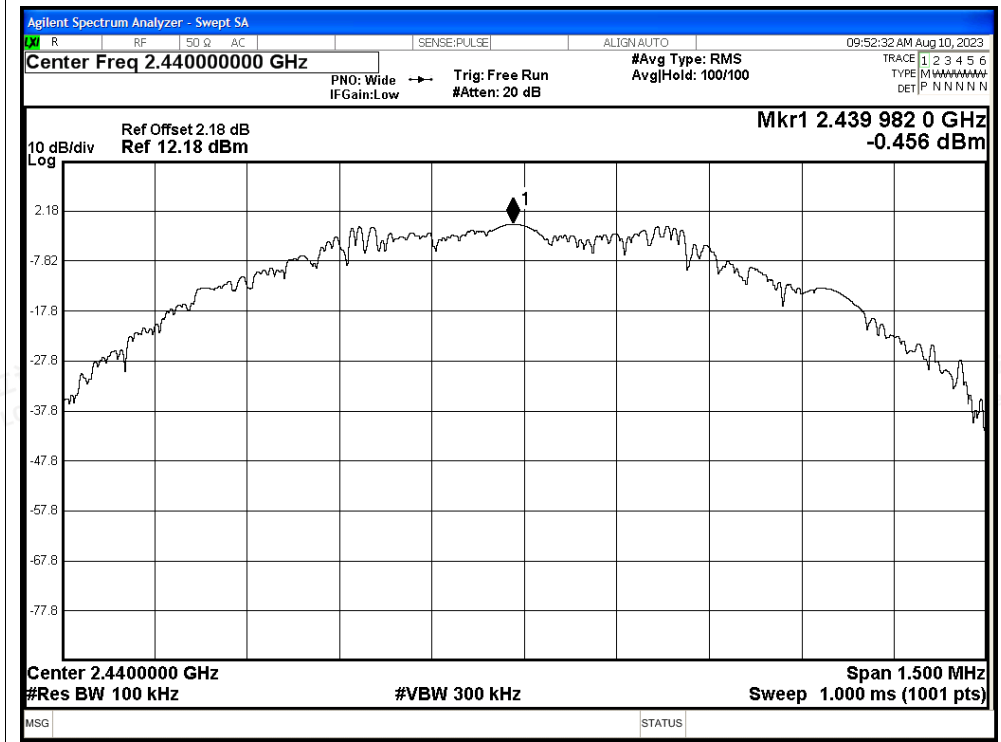


Tx. Spurious NVNT BLE 1M 2440MHz Ant Emission

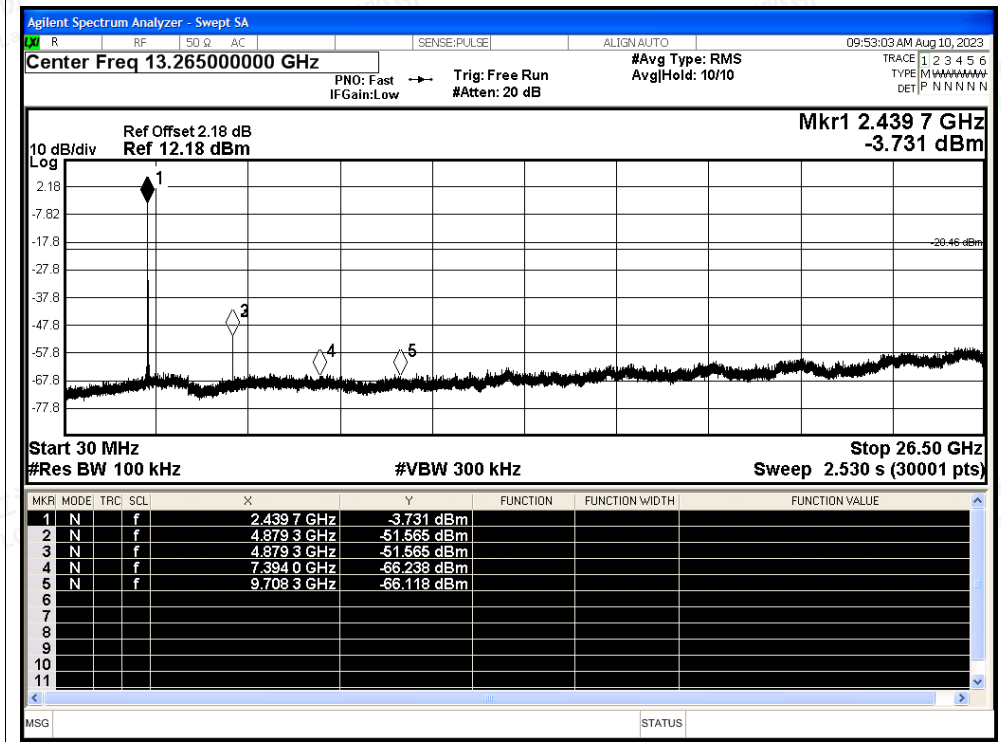




Tx. Spurious NVNT BLE 1M 2480MHz Ant Ref

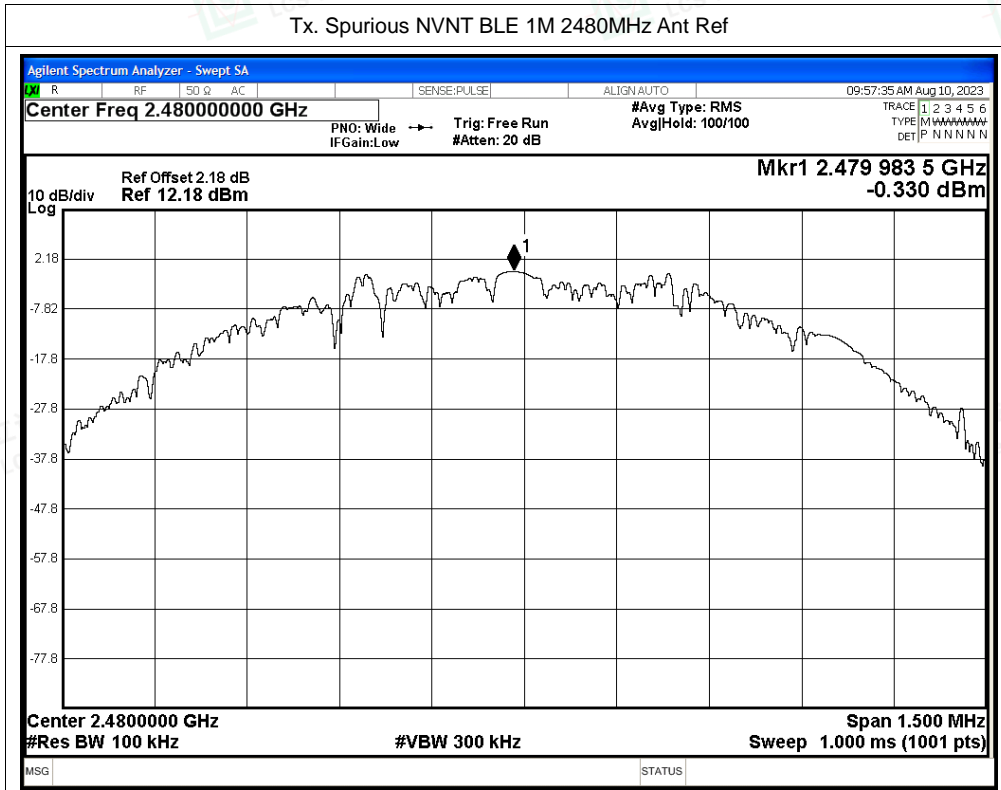


Tx. Spurious NVNT BLE 1M 2480MHz Ant Emission

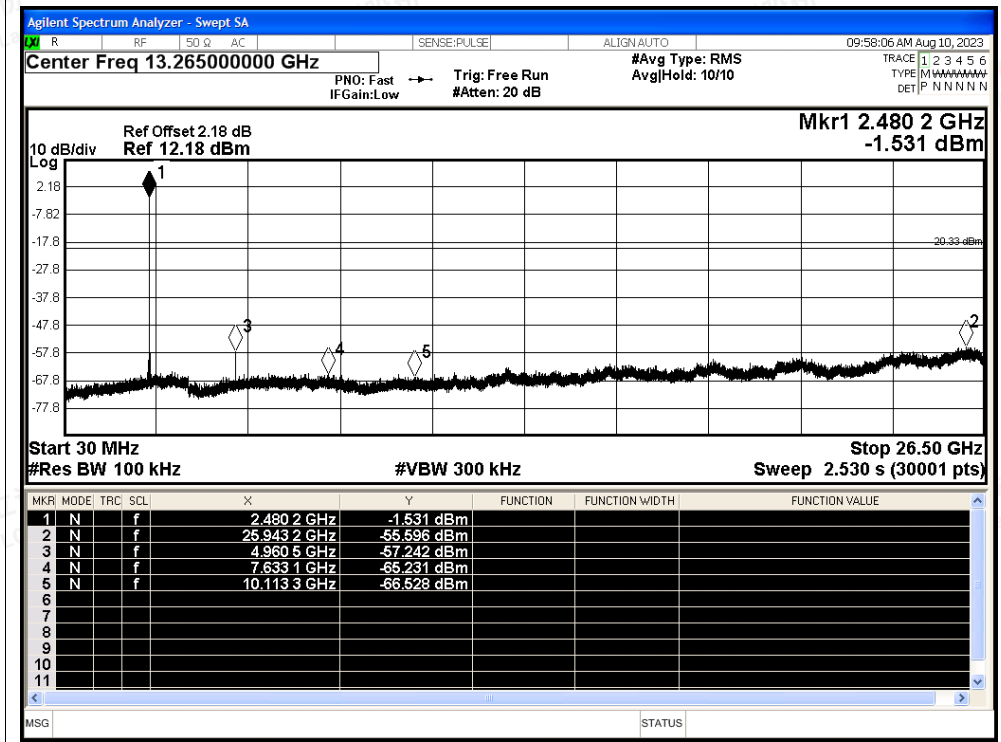




Tx. Spurious NVNT BLE 2M 2402MHz Ant Ref

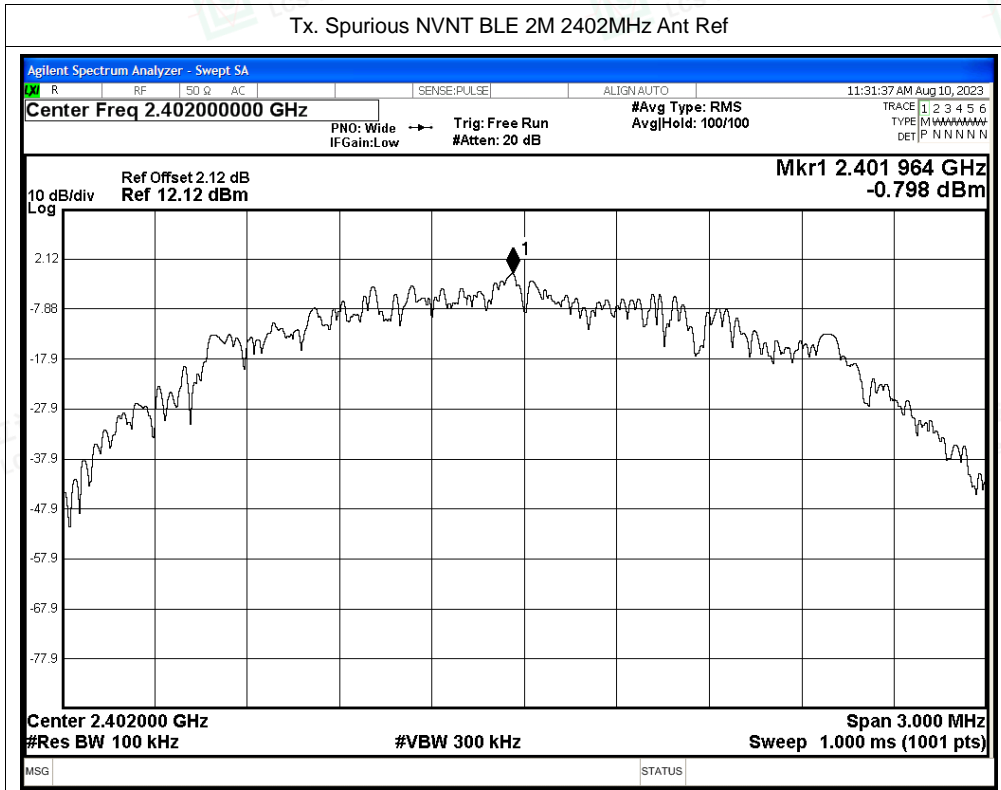


Tx. Spurious NVNT BLE 2M 2402MHz Ant Emission

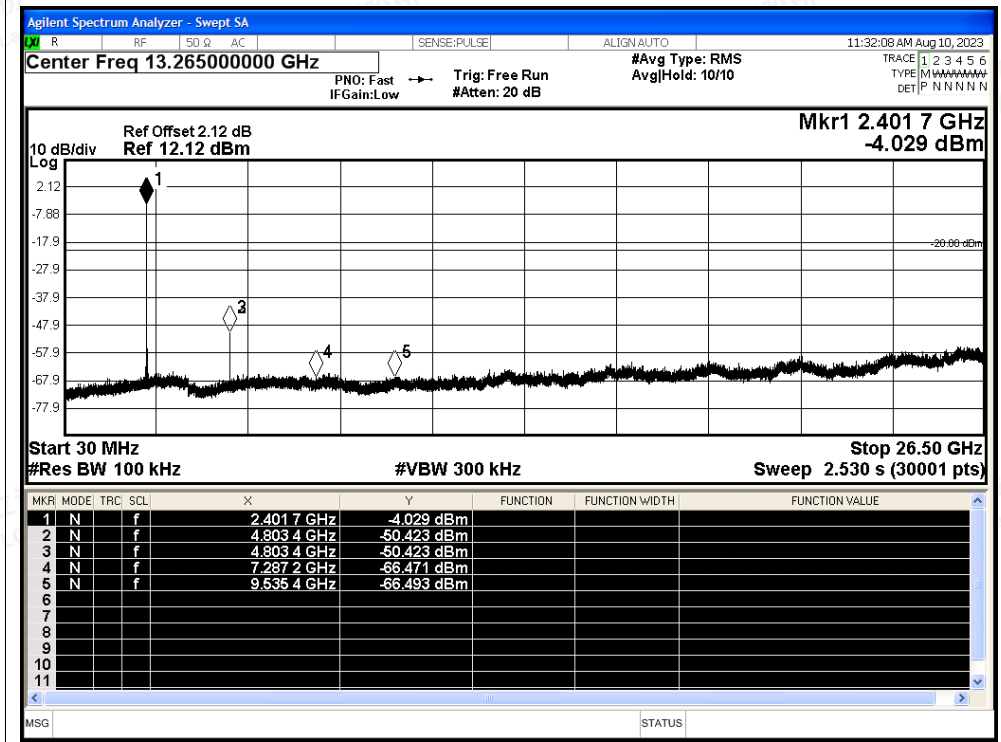




Tx. Spurious NVNT BLE 2M 2440MHz Ant Ref

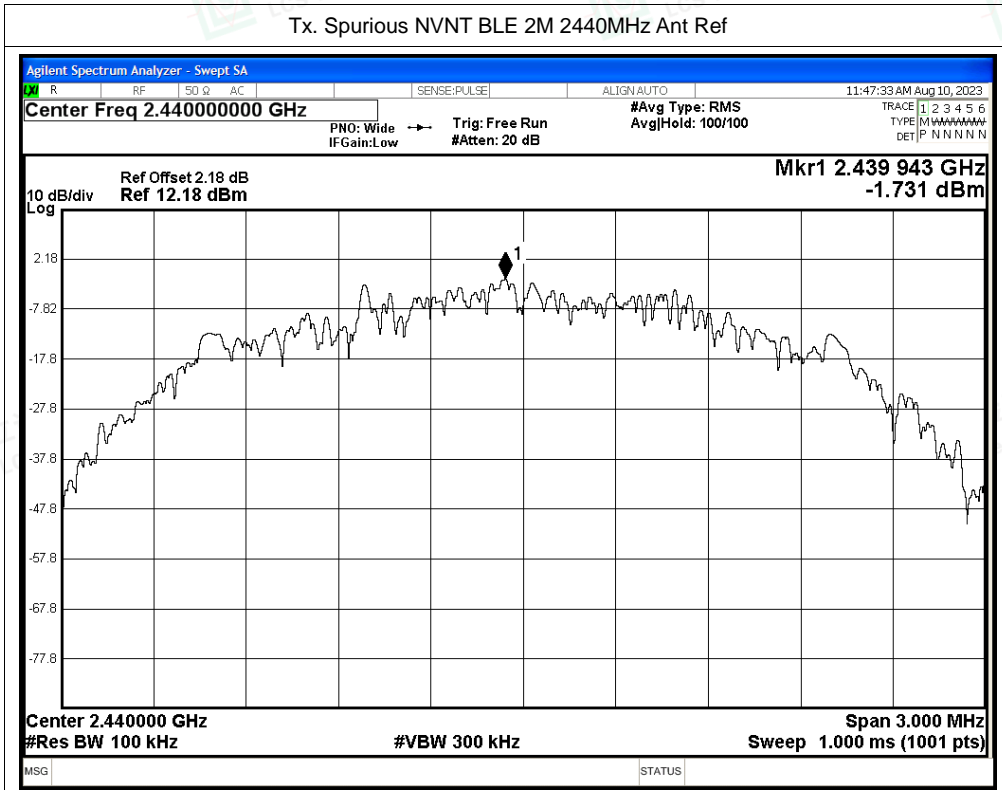


Tx. Spurious NVNT BLE 2M 2440MHz Ant Emission

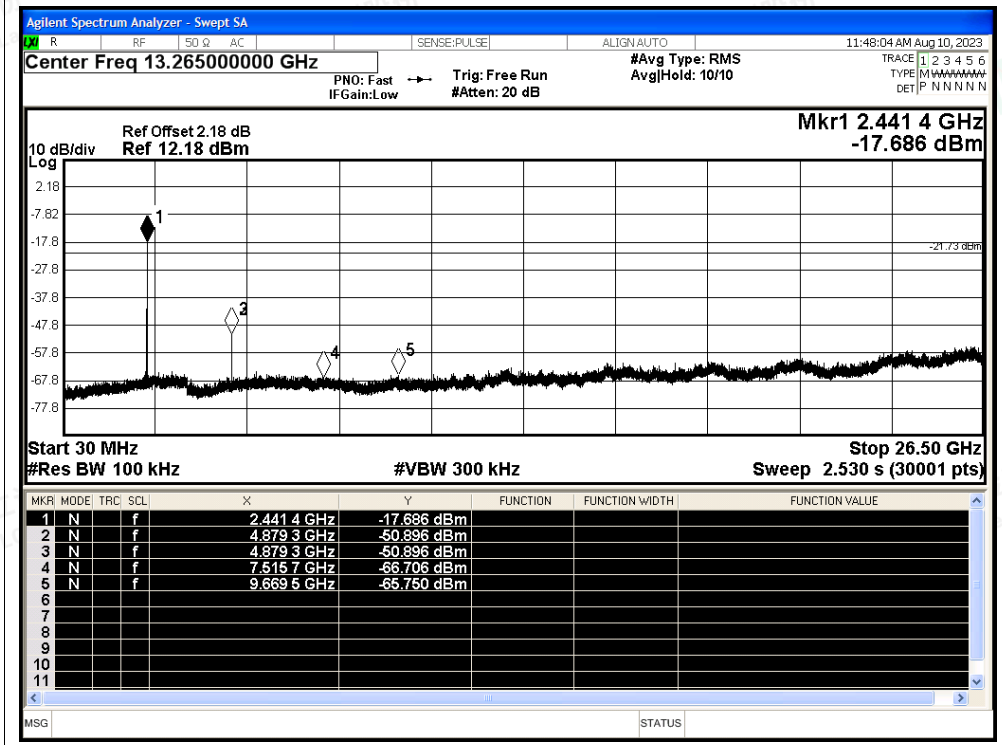




Tx. Spurious NVNT BLE 2M 2480MHz Ant Ref

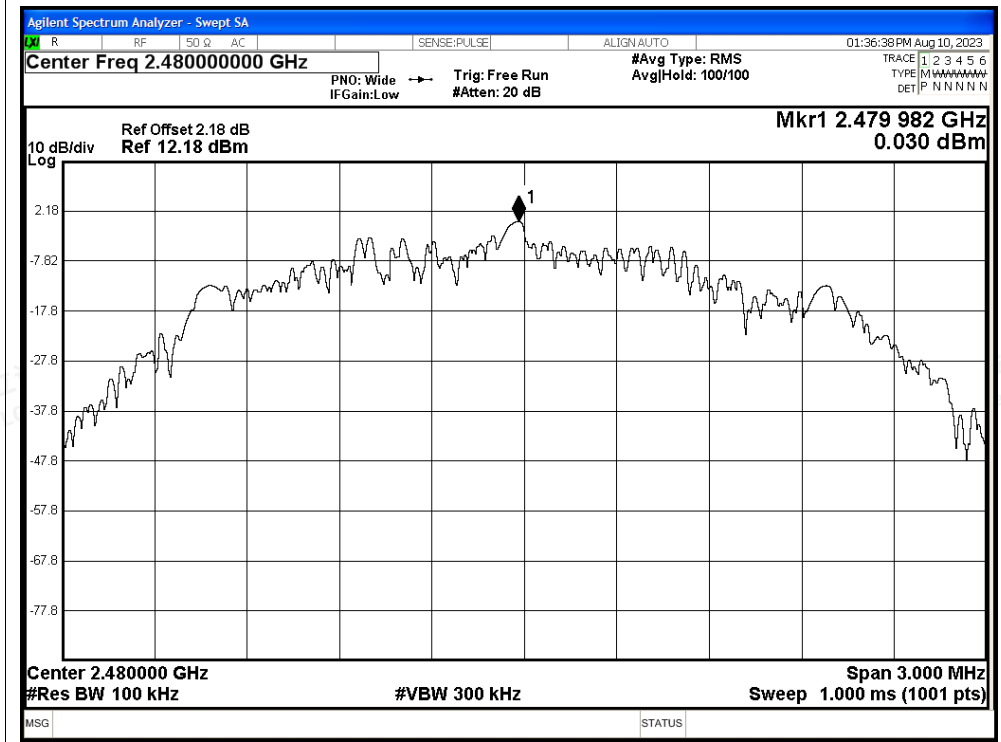

Tx. Spurious NVNT BLE 2M 2480MHz Ant Emission

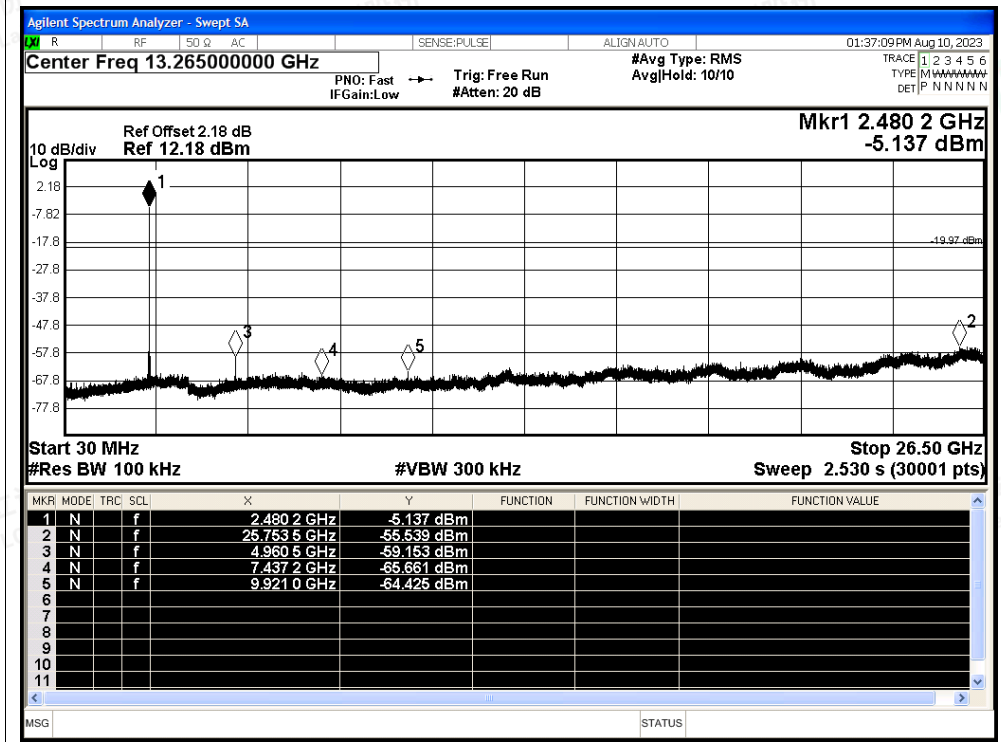



A.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant	14.59	8.36	2.39
NVNT	BLE 1M	2440	Ant	14.64	8.34	2.38
NVNT	BLE 1M	2480	Ant	14.5	8.39	2.39
NVNT	BLE 2M	2402	Ant	7.88	11.03	4.76
NVNT	BLE 2M	2440	Ant	7.79	11.08	4.8
NVNT	BLE 2M	2480	Ant	7.85	11.05	4.76






Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant

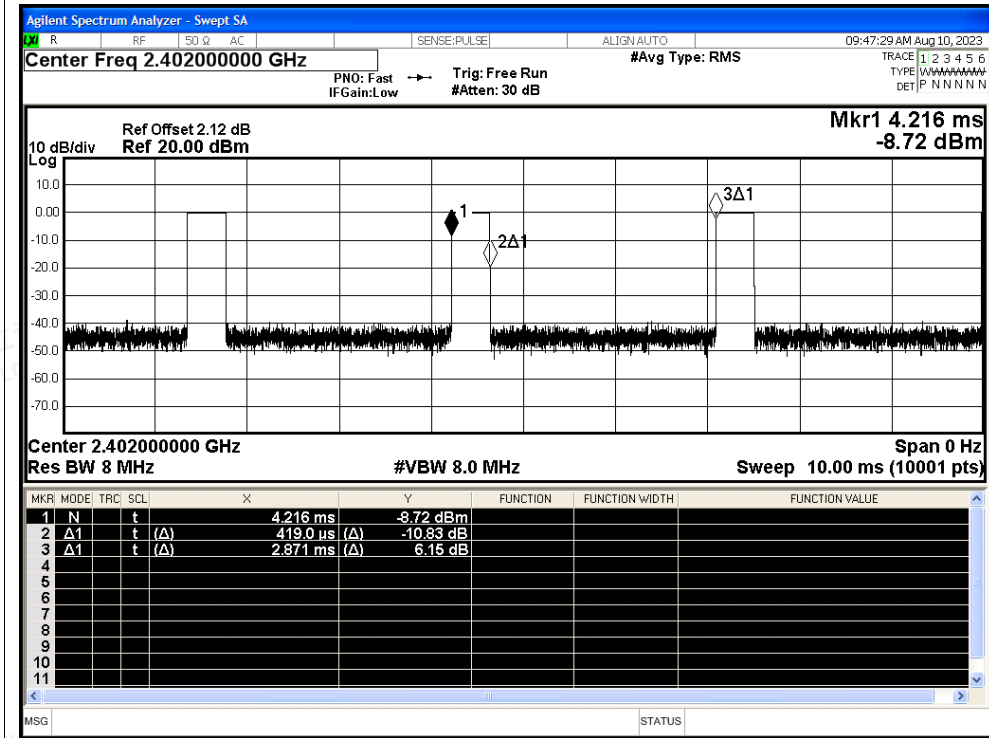


Duty Cycle NVNT BLE 1M 2440MHz Ant

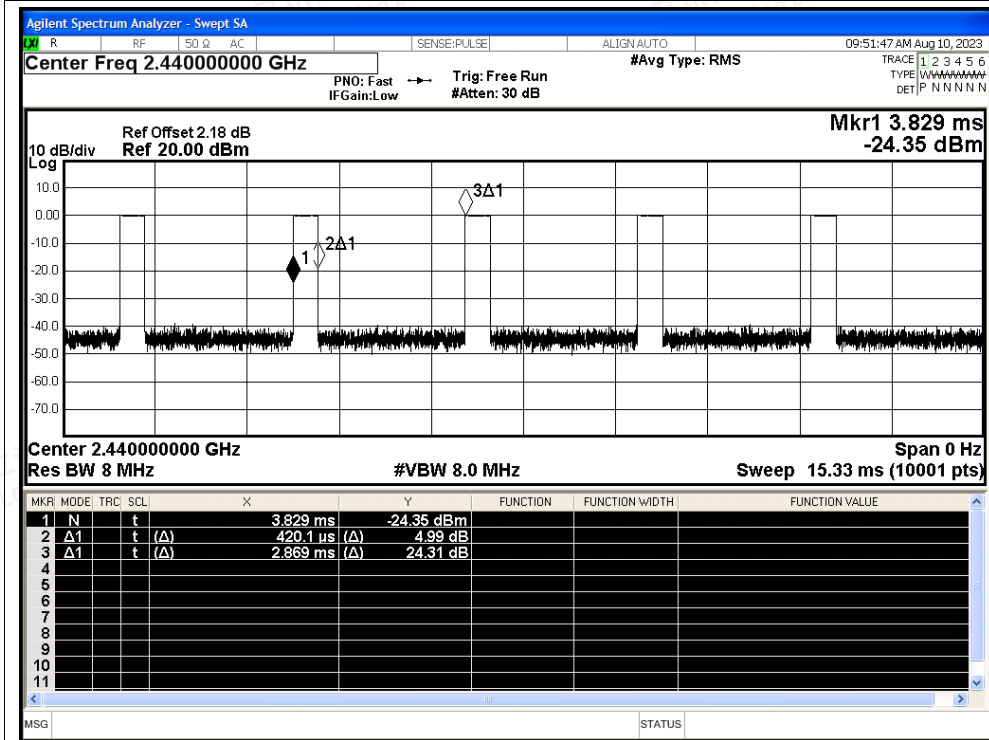




Duty Cycle NVNT BLE 1M 2480MHz Ant

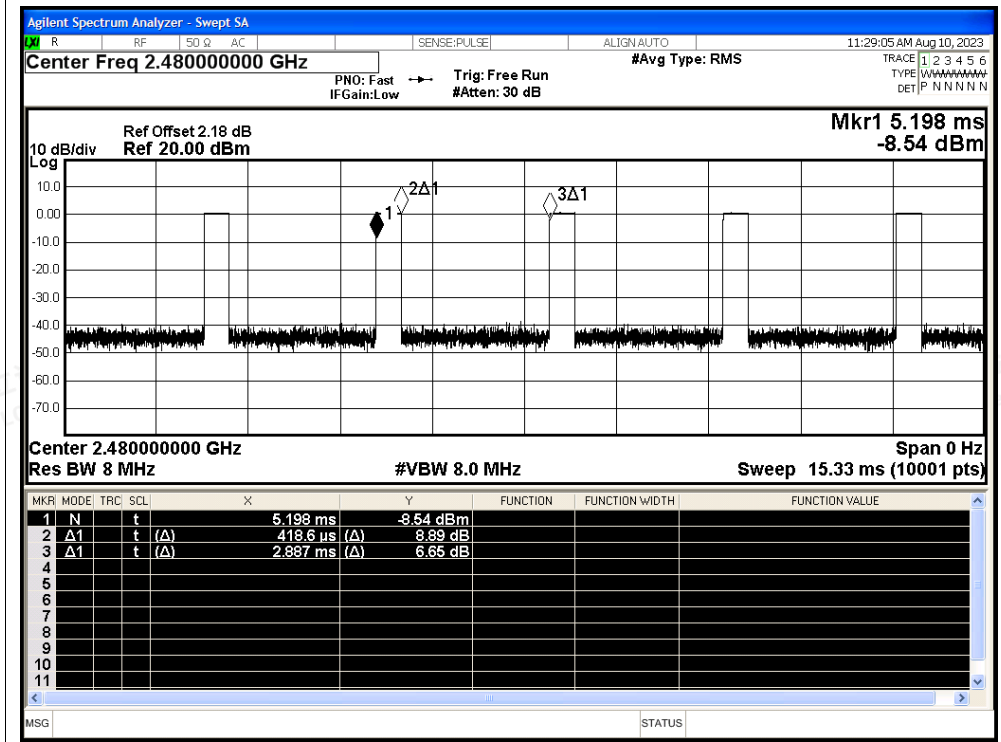


Duty Cycle NVNT BLE 2M 2402MHz Ant

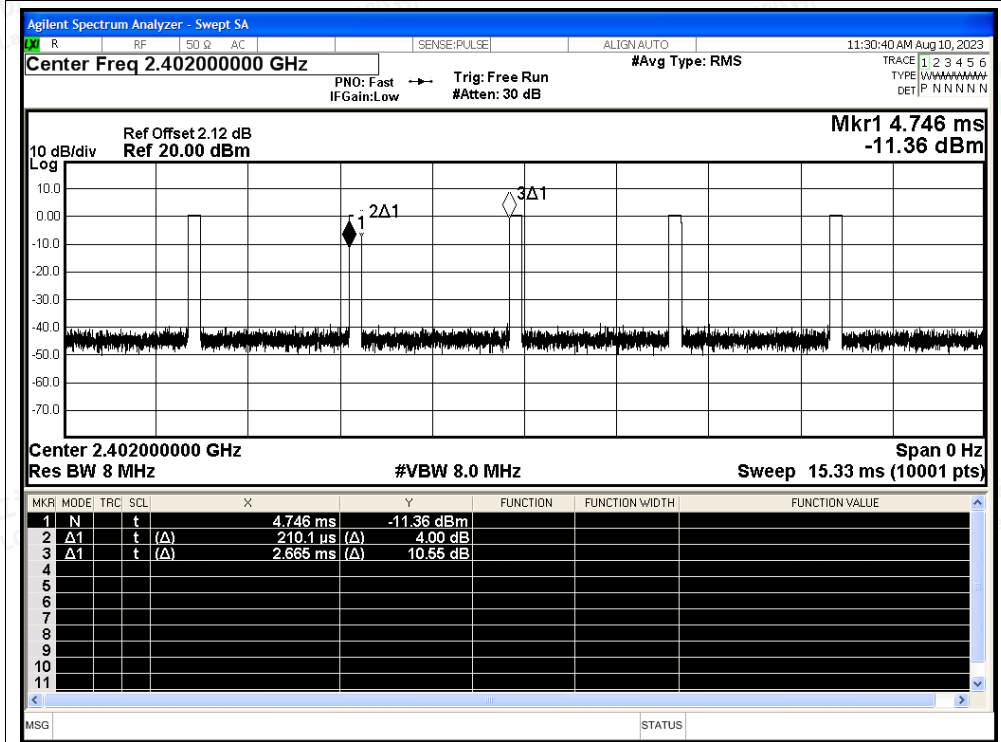




Duty Cycle NVNT BLE 2M 2440MHz Ant

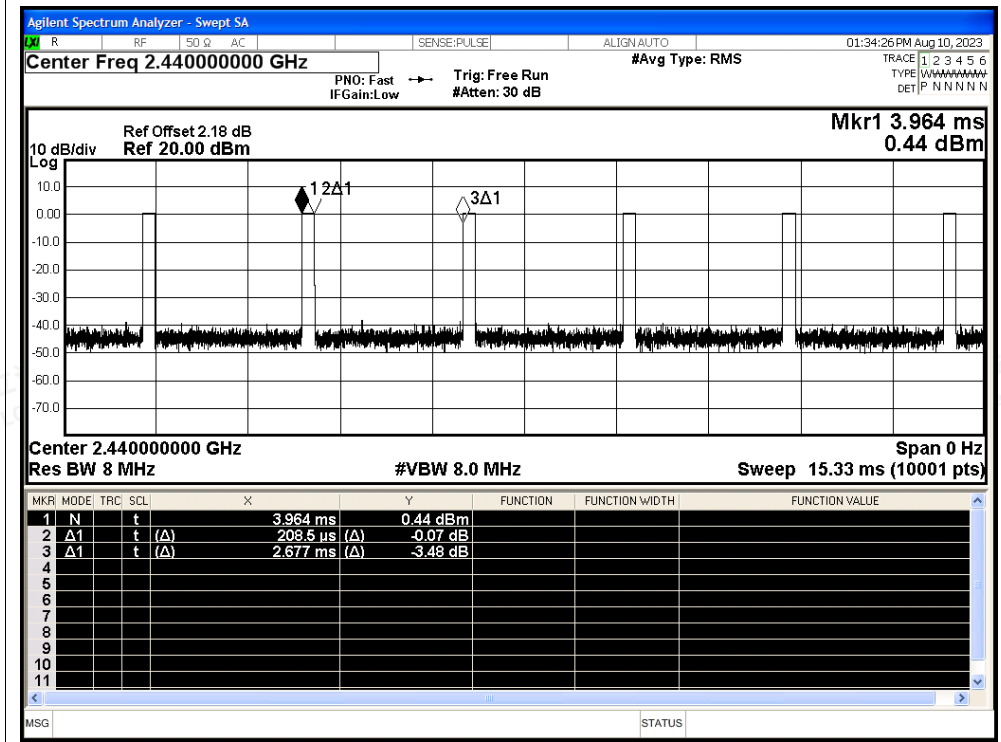

Duty Cycle NVNT BLE 2M 2480MHz Ant

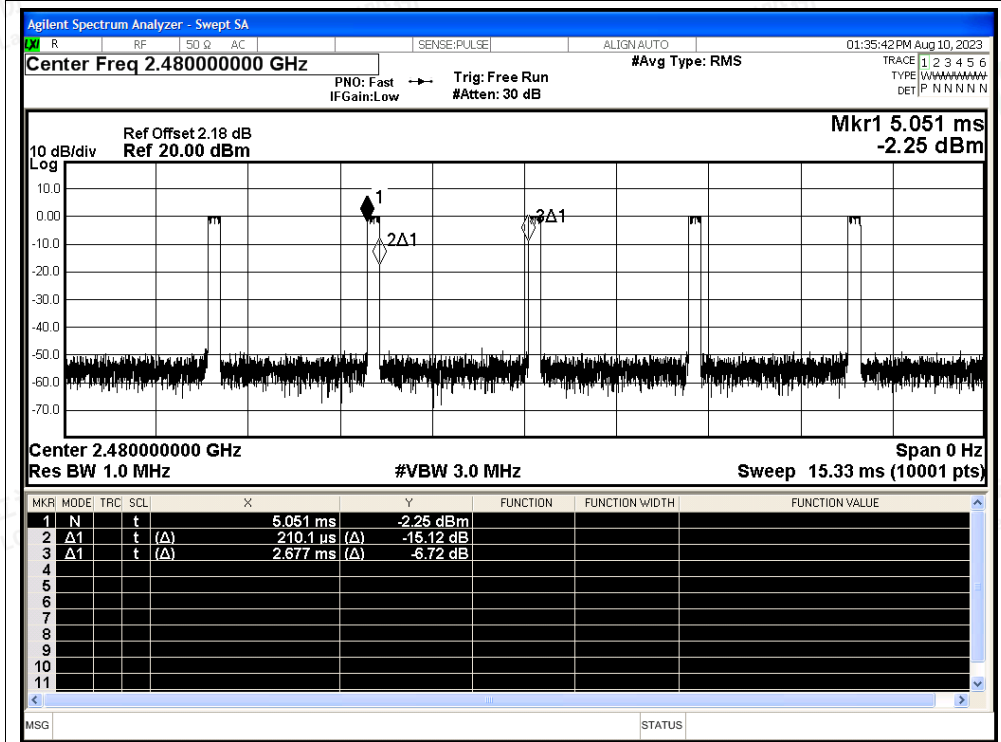



A.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant	2310	-50.87	4.3	48.66	Peak	74	Pass
NVNT	BLE 1M	2402	Ant	2310	-57.47	4.3	42.06	Average	54	Pass
NVNT	BLE 1M	2402	Ant	2378.064	-46.04	4.3	53.49	Peak	74	Pass
NVNT	BLE 1M	2402	Ant	2389.68	-54.88	4.3	44.65	Average	54	Pass
NVNT	BLE 1M	2402	Ant	2390	-51.11	4.3	48.42	Peak	74	Pass
NVNT	BLE 1M	2402	Ant	2390	-54.89	4.3	44.64	Average	54	Pass
NVNT	BLE 1M	2480	Ant	2483.5	-50.19	4.3	49.34	Peak	74	Pass
NVNT	BLE 1M	2480	Ant	2483.5	-48.1	4.3	51.43	Average	54	Pass
NVNT	BLE 1M	2480	Ant	2483.872	-28.95	4.3	70.58	Peak	74	Pass
NVNT	BLE 1M	2480	Ant	2483.8	-47.17	4.3	52.36	Average	54	Pass
NVNT	BLE 1M	2480	Ant	2500	-50.23	4.3	49.30	Peak	74	Pass
NVNT	BLE 1M	2480	Ant	2500	-55.99	4.3	43.54	Average	54	Pass
NVNT	BLE 2M	2402	Ant	2310	-50.73	4.3	48.80	Peak	74	Pass
NVNT	BLE 2M	2402	Ant	2310	-56.8	4.3	42.73	Average	54	Pass
NVNT	BLE 2M	2402	Ant	2389.584	-41.53	4.3	58.00	Peak	74	Pass
NVNT	BLE 2M	2402	Ant	2389.68	-53.02	4.3	46.51	Average	54	Pass
NVNT	BLE 2M	2402	Ant	2390	-50.74	4.3	48.79	Peak	74	Pass
NVNT	BLE 2M	2402	Ant	2390	-53.12	4.3	46.41	Average	54	Pass
NVNT	BLE 2M	2480	Ant	2483.5	-30.32	4.3	69.21	Peak	74	Pass
NVNT	BLE 2M	2480	Ant	2483.5	-46.09	4.3	53.44	Average	54	Pass
NVNT	BLE 2M	2480	Ant	2484.208	-28.6	4.3	70.93	Peak	74	Pass
NVNT	BLE 2M	2480	Ant	2483.536	-45.72	4.3	53.81	Average	54	Pass
NVNT	BLE 2M	2480	Ant	2500	-51.59	4.3	47.94	Peak	74	Pass
NVNT	BLE 2M	2480	Ant	2500	-56.13	4.3	43.40	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant Peak

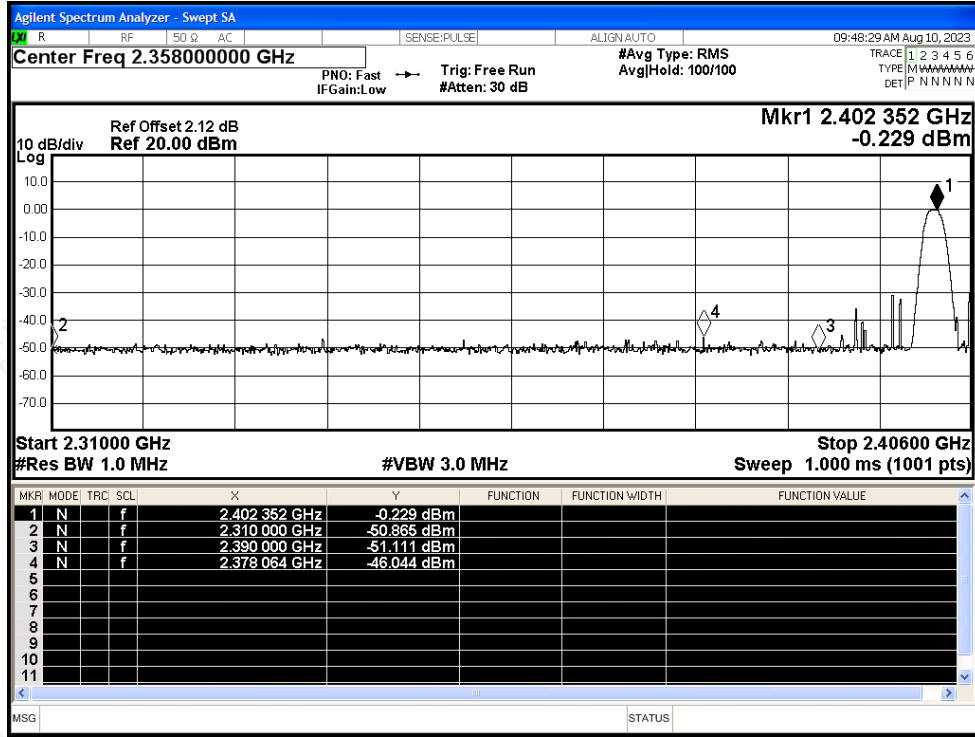


Restrict Band NVNT BLE 1M 2402MHz Ant Average

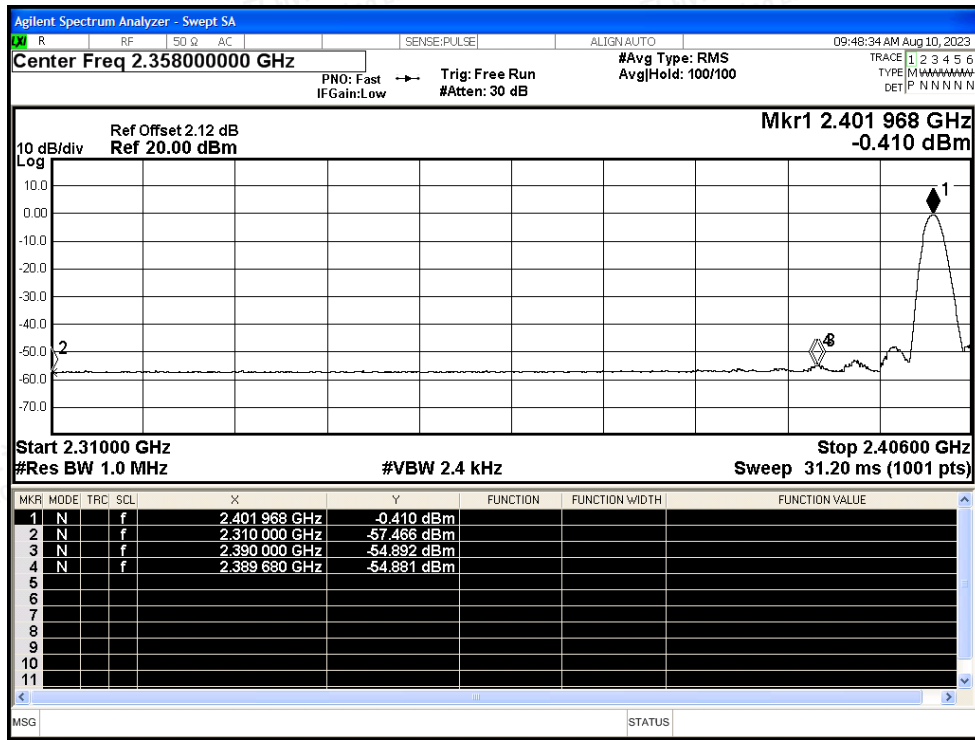




Restrict Band NVNT BLE 1M 2480MHz Ant Peak

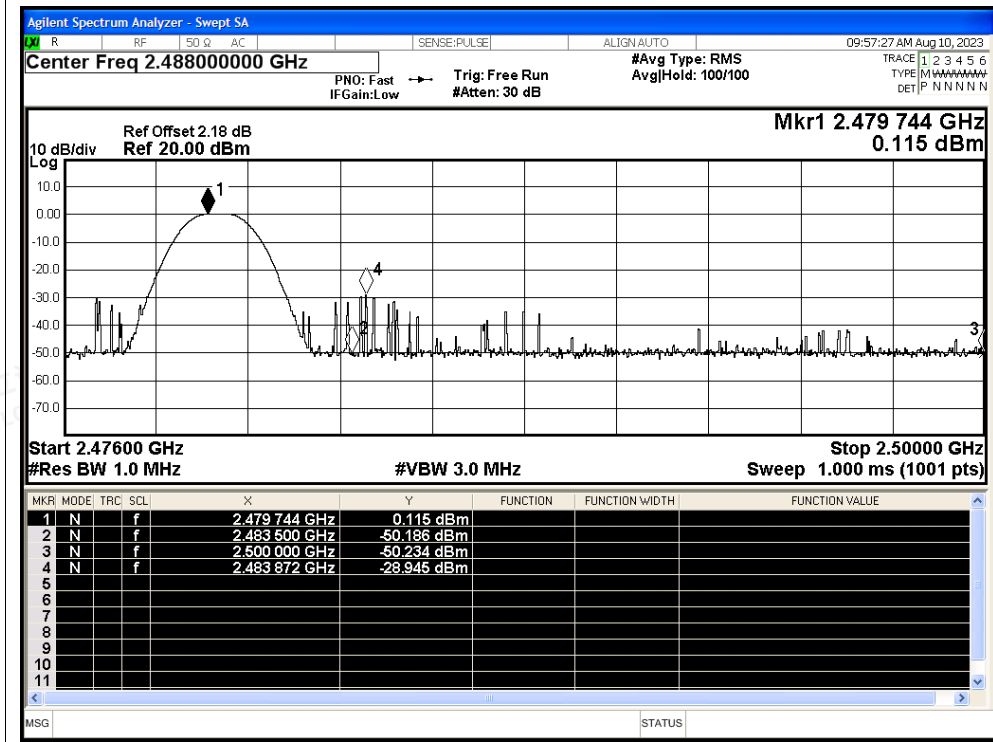


Restrict Band NVNT BLE 1M 2480MHz Ant Average

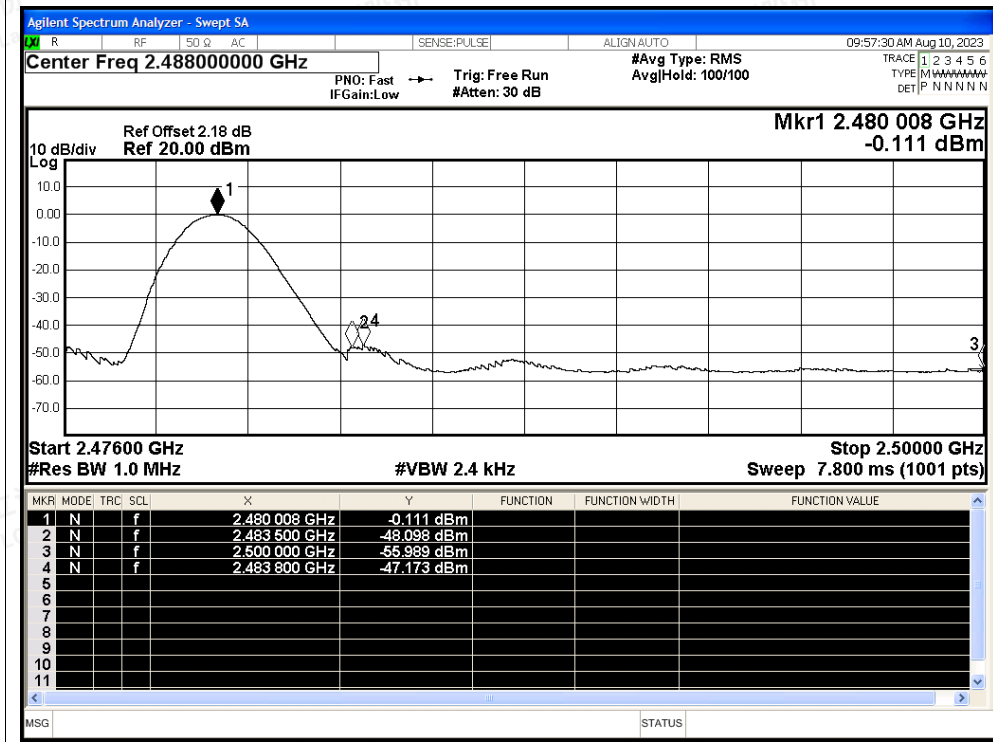




Restrict Band NVNT BLE 2M 2402MHz Ant Peak

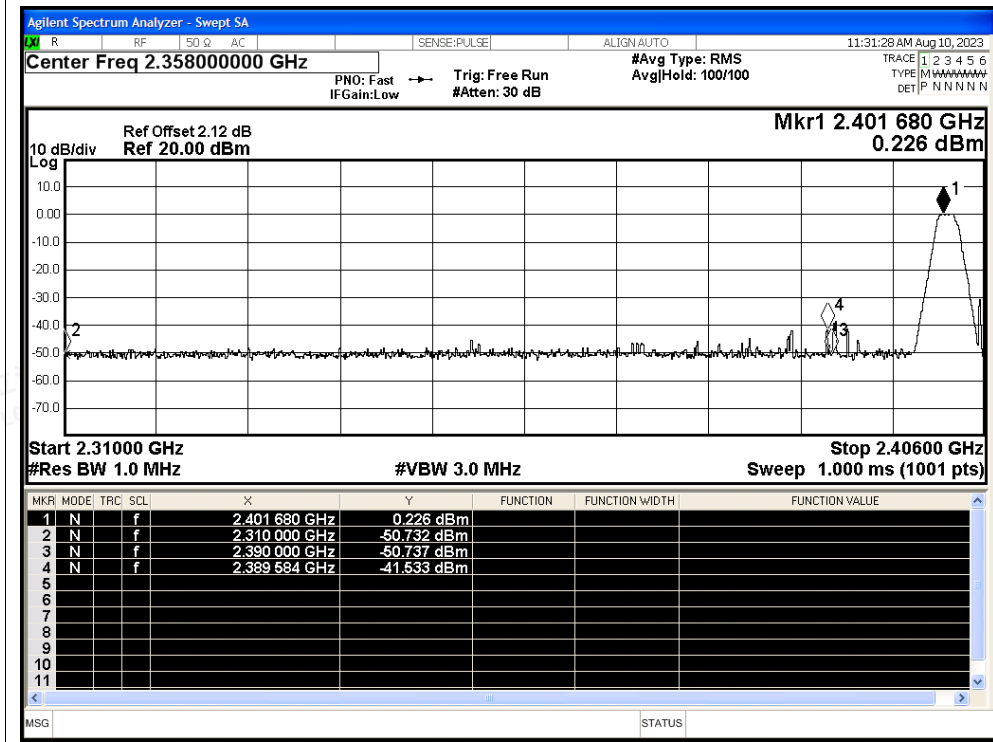


Restrict Band NVNT BLE 2M 2402MHz Ant Average

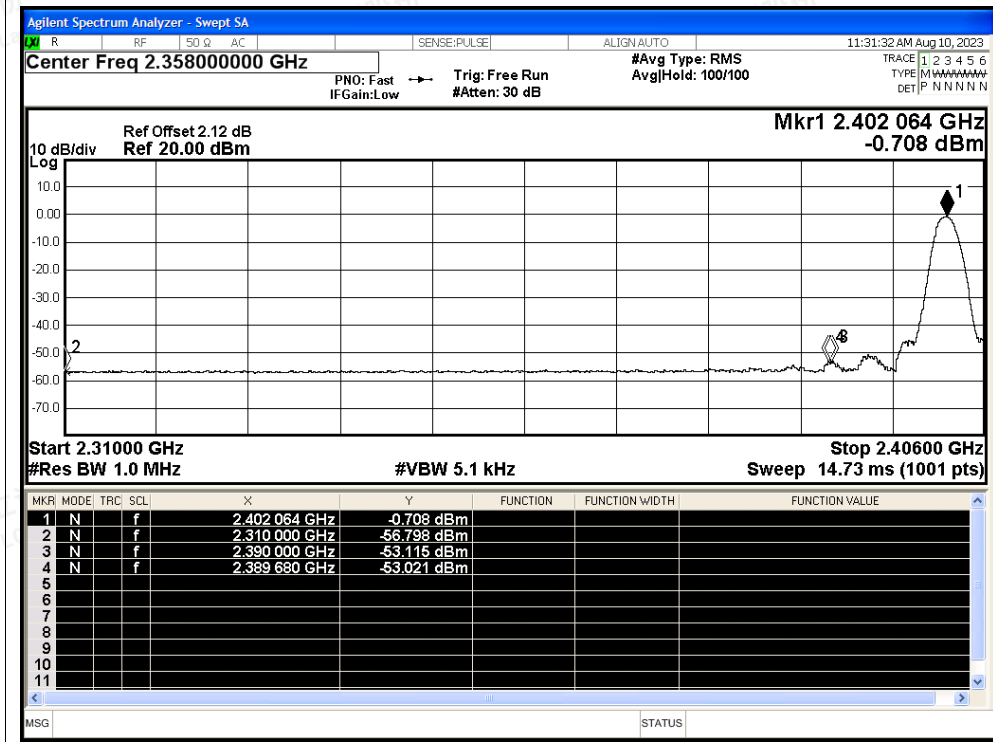



Restrict Band NVNT BLE 2M 2480MHz Ant Peak

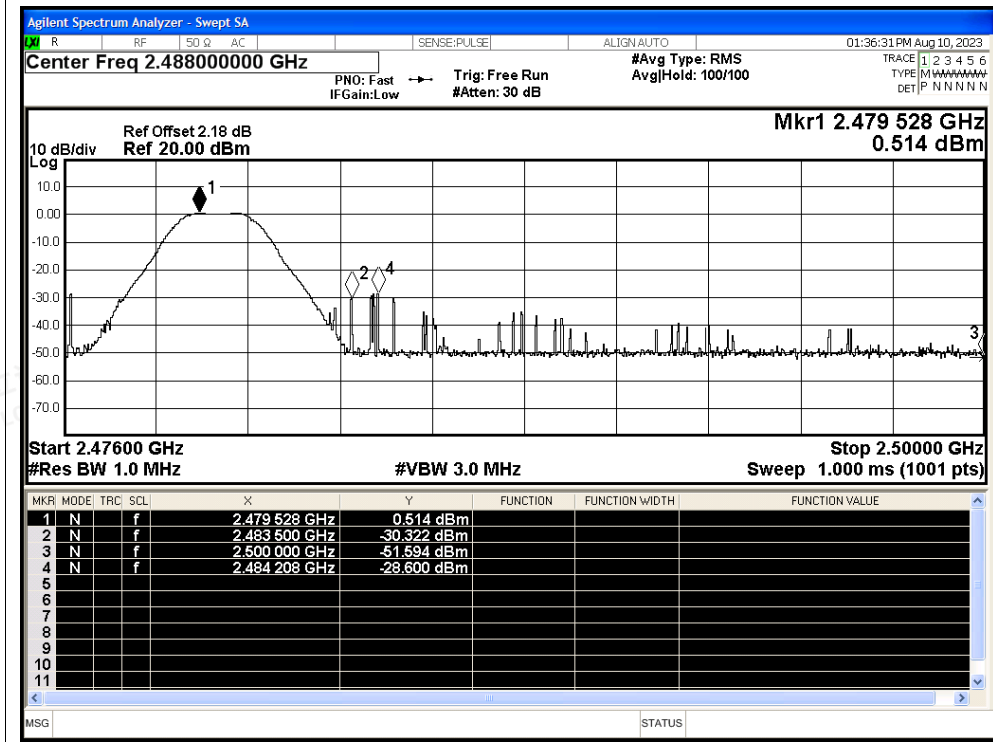

Restrict Band NVNT BLE 2M 2480MHz Ant Average

