


29. DC_n26(Part22)_SCS15_5M_H_Outer Full(QPSK)

29.4. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 845.15 | -1.61 | 30 | Pass | 401 |
| 849 | 850 | 0.051 | RMS | 849 | -39.43 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850 | -46.26 | -13 | Pass | 401 |

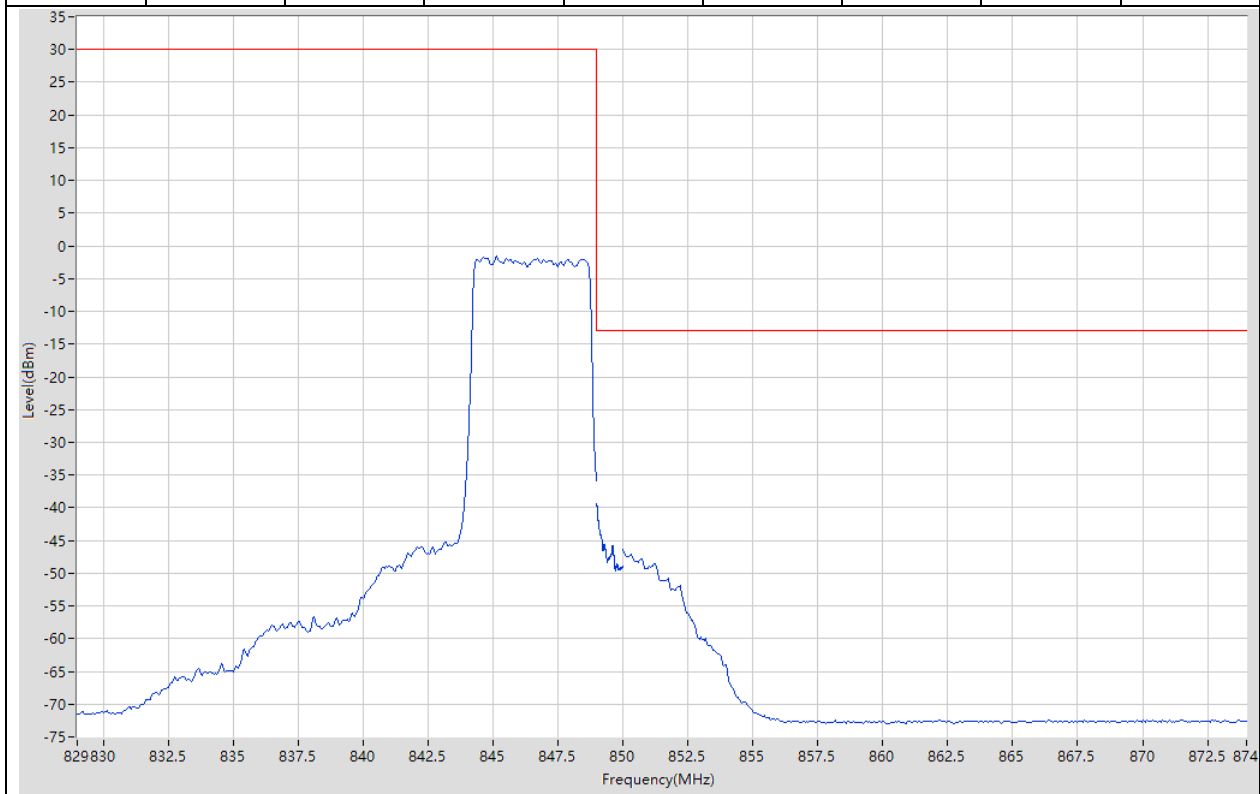

29. DC_n26(Part22)_SCS15_10M_L_Edge_1RB_Left(QPSK)

29.5. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.94 | -58.91 | -13 | Pass | 401 |
| 823 | 824 | 0.1 | RMS | 824 | -24.74 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.4 | 11.2 | 30 | Pass | 401 |

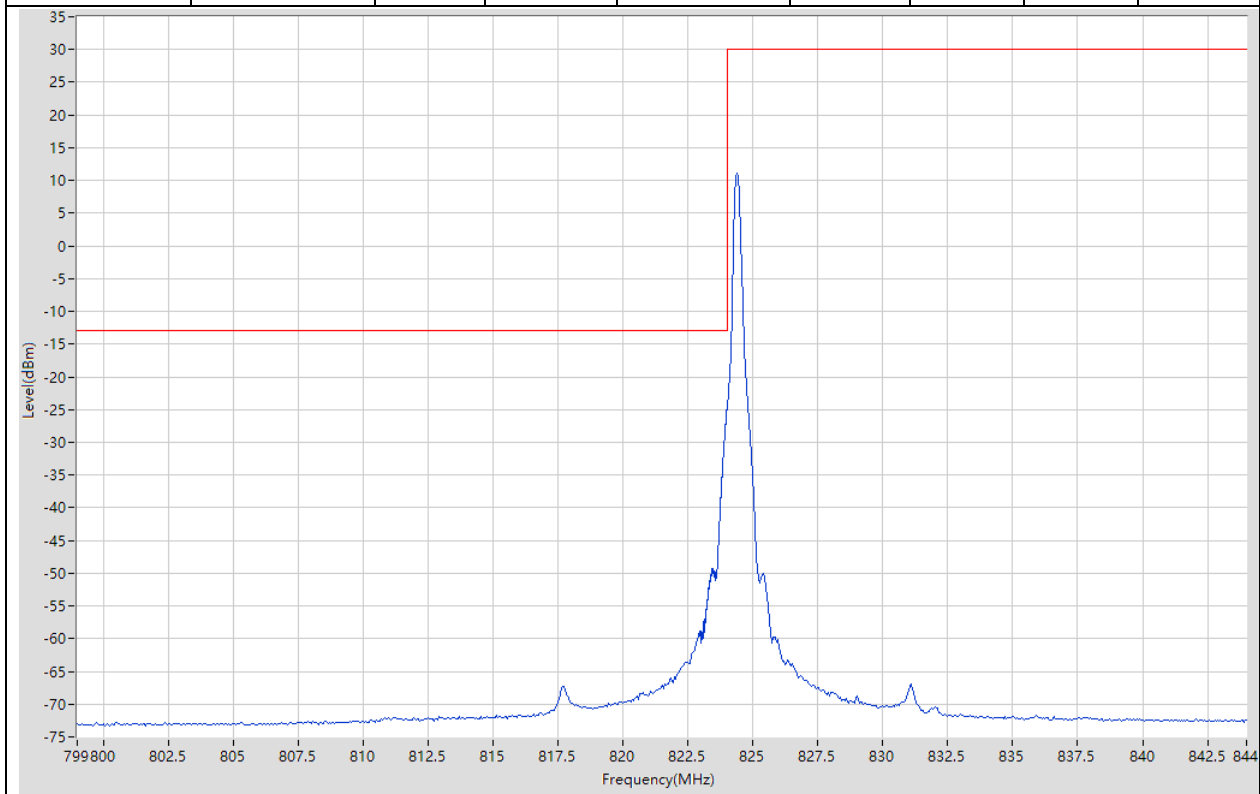

29. DC_n26(Part22)_SCS15_10M_L_Outer Full(QPSK)

29.6. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -46.48 | -13 | Pass | 401 |
| 823 | 824 | 0.1 | RMS | 824 | -37.34 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 827.85 | -4.3 | 30 | Pass | 401 |

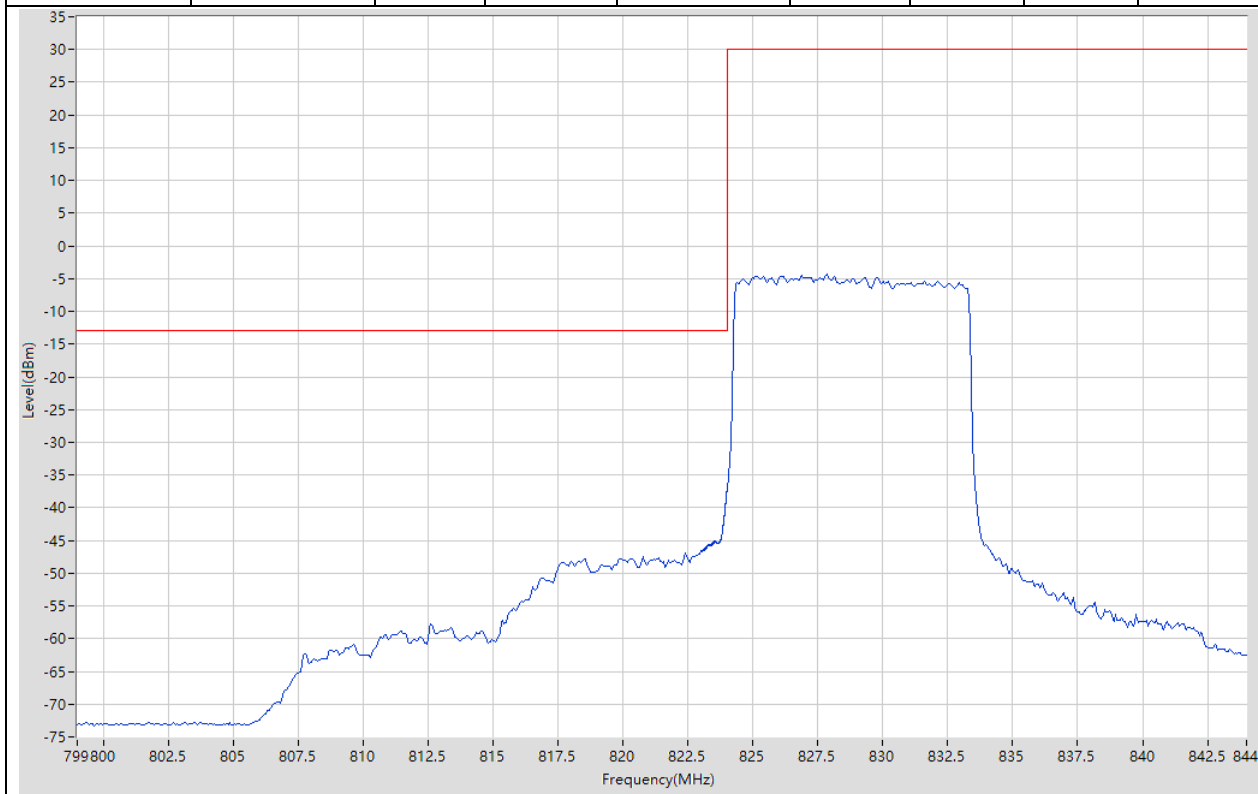

29. DC_n26(Part22)_SCS15_10M_H_Edge_1RB_Right(QPSK)

29.7. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.6 | 11.13 | 30 | Pass | 401 |
| 849 | 850 | 0.1 | RMS | 849 | -25.66 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850 | -59.5 | -13 | Pass | 401 |

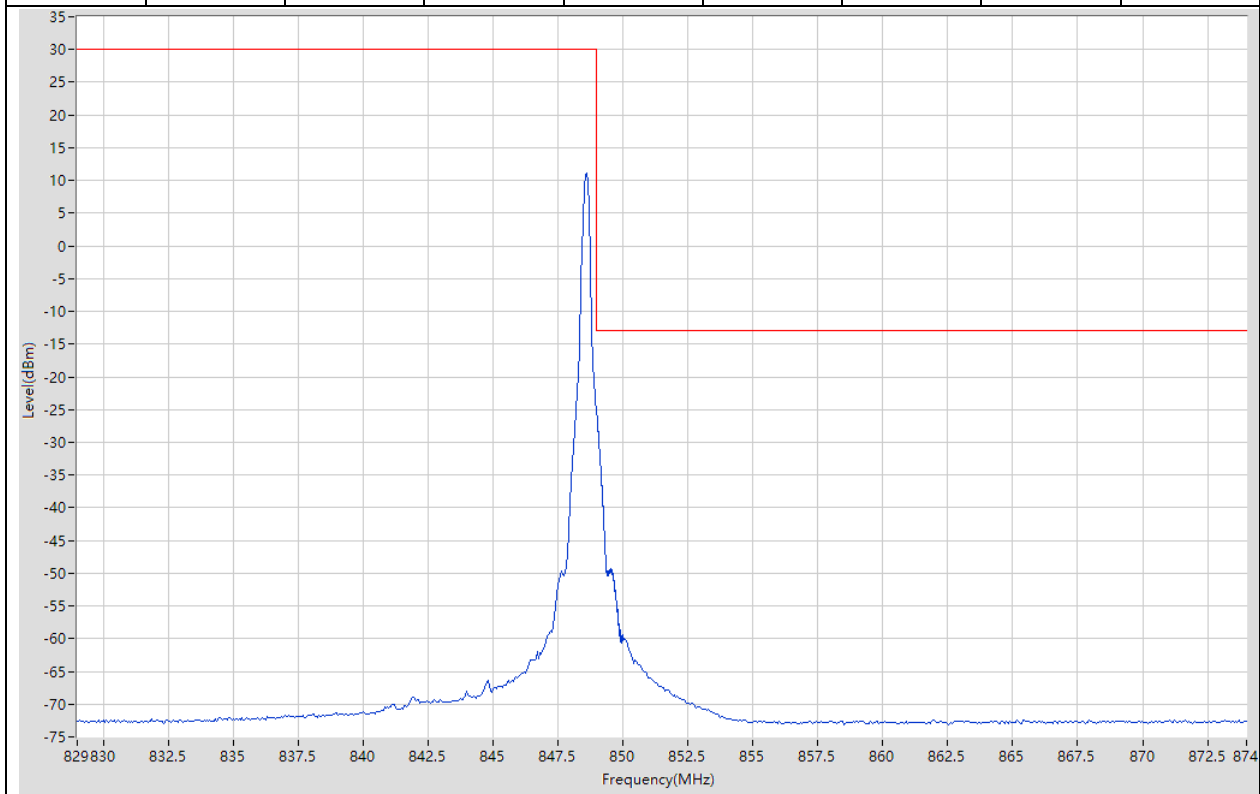

29. DC_n26(Part22)_SCS15_10M_H_Outer Full(QPSK)

29.8. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 842.85 | -4.35 | 30 | Pass | 401 |
| 849 | 850 | 0.1 | RMS | 849.005 | -43.98 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.18 | -44.94 | -13 | Pass | 401 |

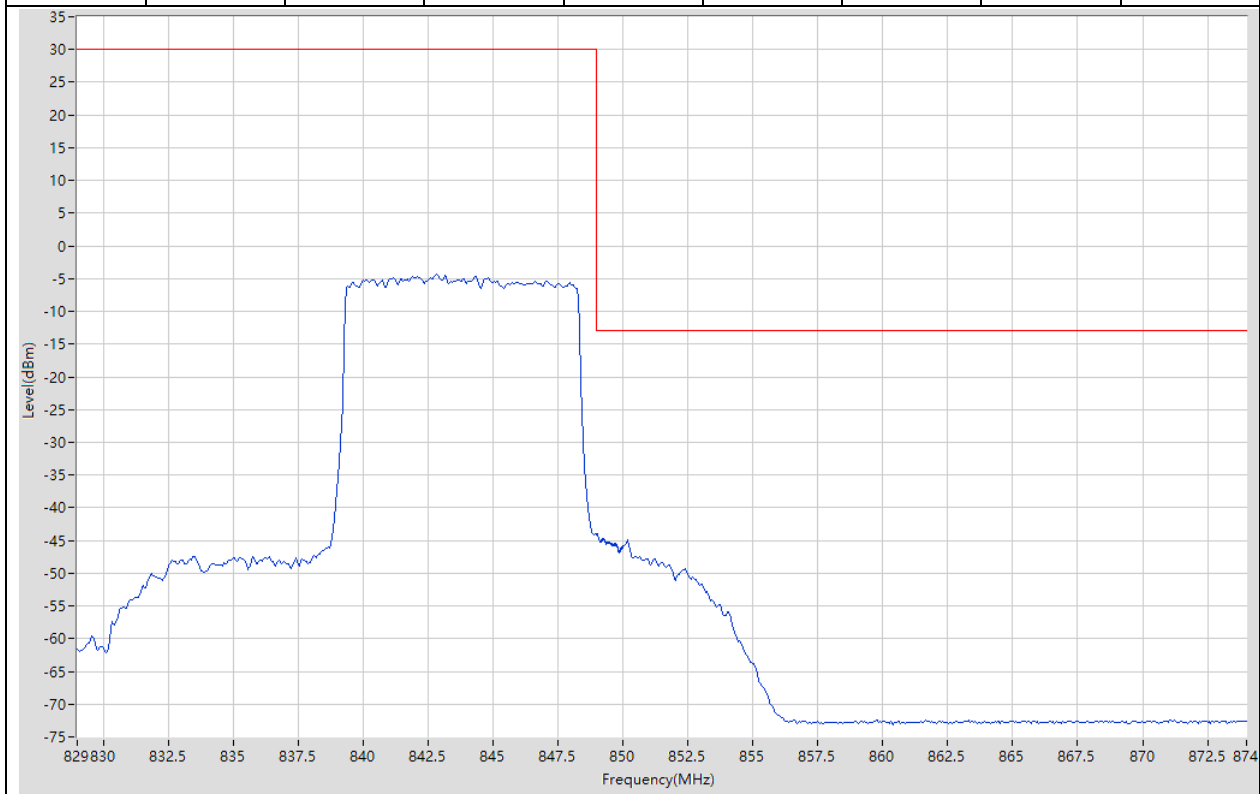

29. DC_n26(Part22)_SCS15_20M_L_Edge_1RB_Left(QPSK)

29.9. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -60.63 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 824 | -26.83 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.55 | 11.18 | 30 | Pass | 401 |

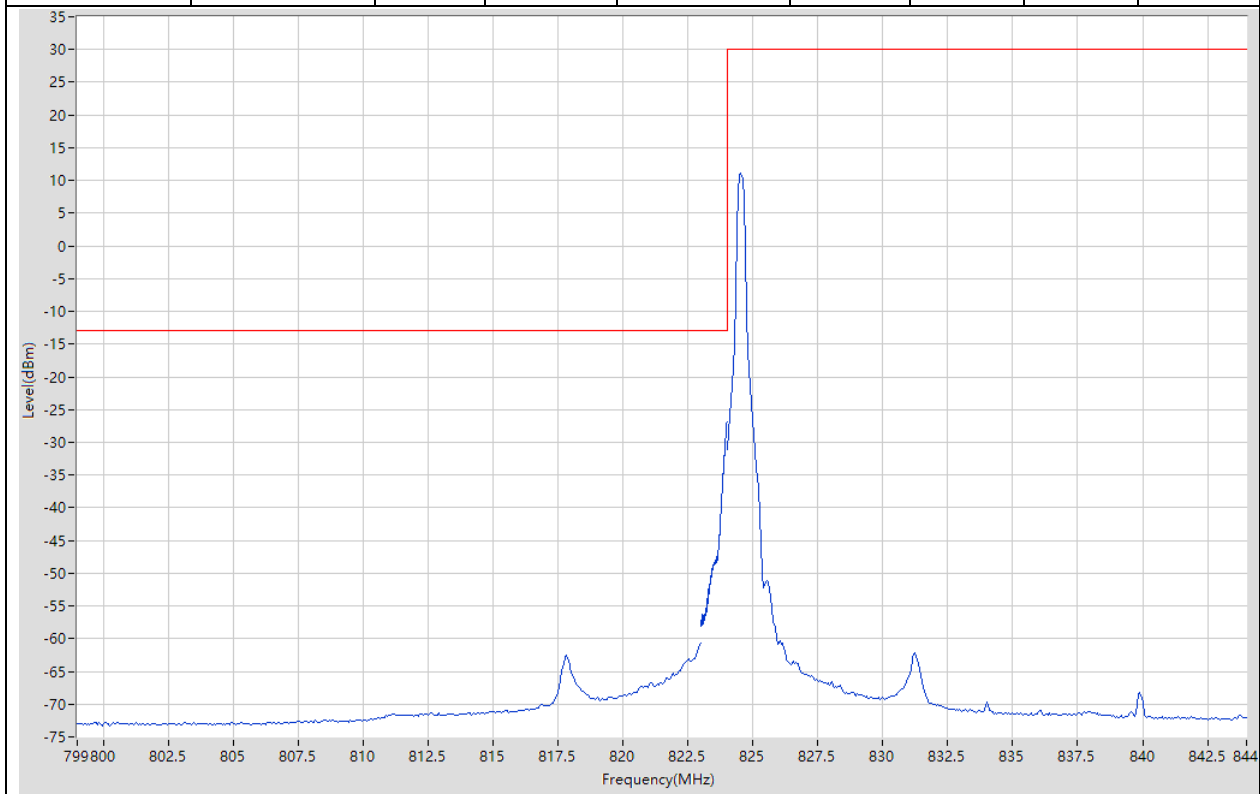

29. DC_n26(Part22)_SCS15_20M_L_Outer Full(QPSK)

29.10. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -43.77 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 823.998 | -39.22 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 839.55 | -7.51 | 30 | Pass | 401 |

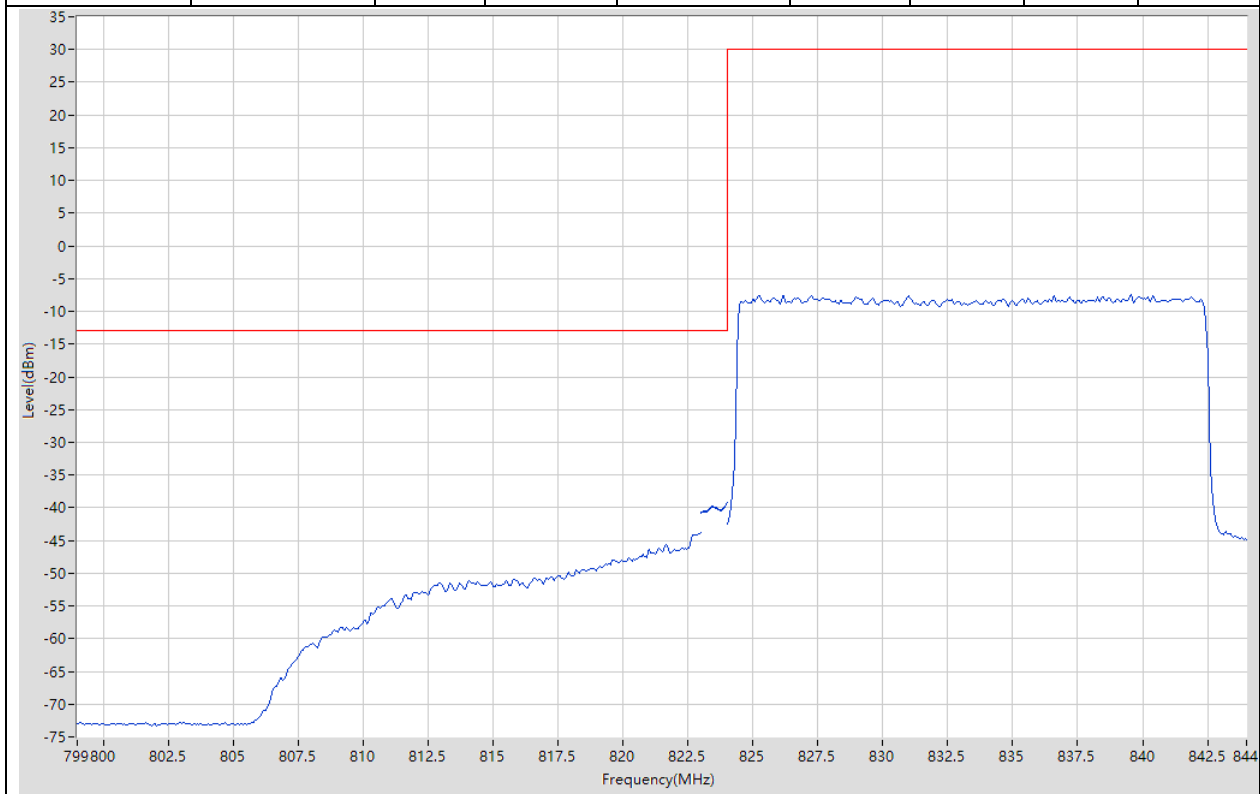

29. DC_n26(Part22)_SCS15_20M_H_Edge_1RB_Right(QPSK)

29.11. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.45 | 11.09 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849 | -28.02 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850 | -60.51 | -13 | Pass | 401 |

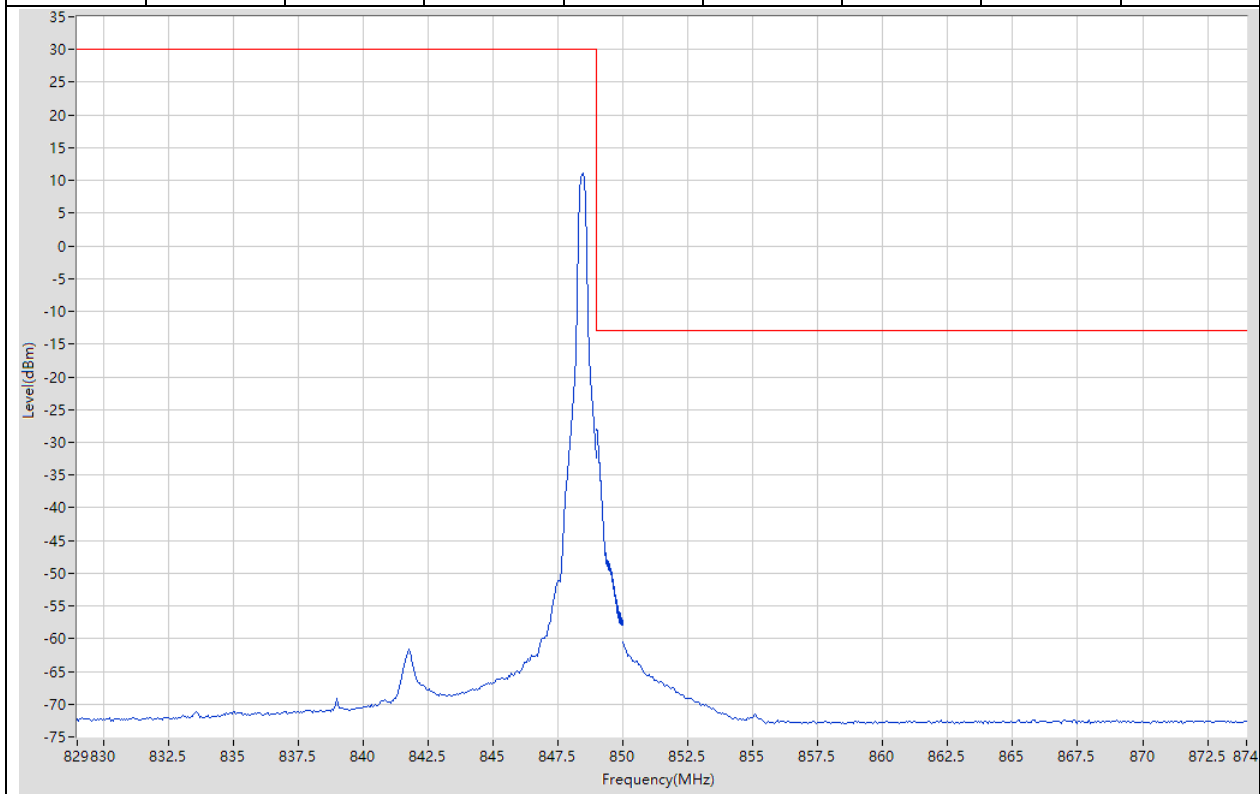

29. DC_n26(Part22)_SCS15_20M_H_Outer Full(QPSK)

29.12. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 842.2 | -7.12 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849.173 | -44.21 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.06 | -49.03 | -13 | Pass | 401 |

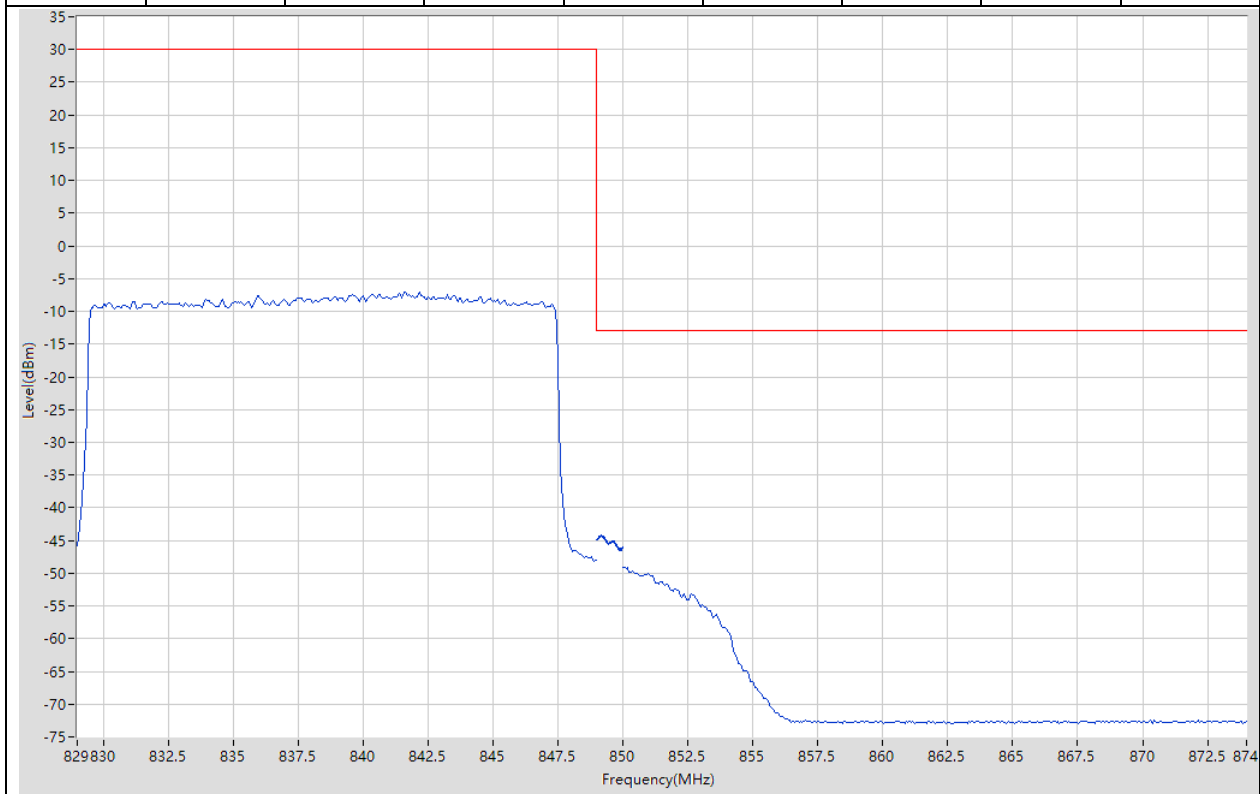

29. DC_n26(Part22)_SCS15_5M_L_Edge_1RB_Left(16QAM)

29.13. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -59.31 | -13 | Pass | 401 |
| 823 | 824 | 0.051 | RMS | 824 | -24.97 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.3 | 10.4 | 30 | Pass | 401 |

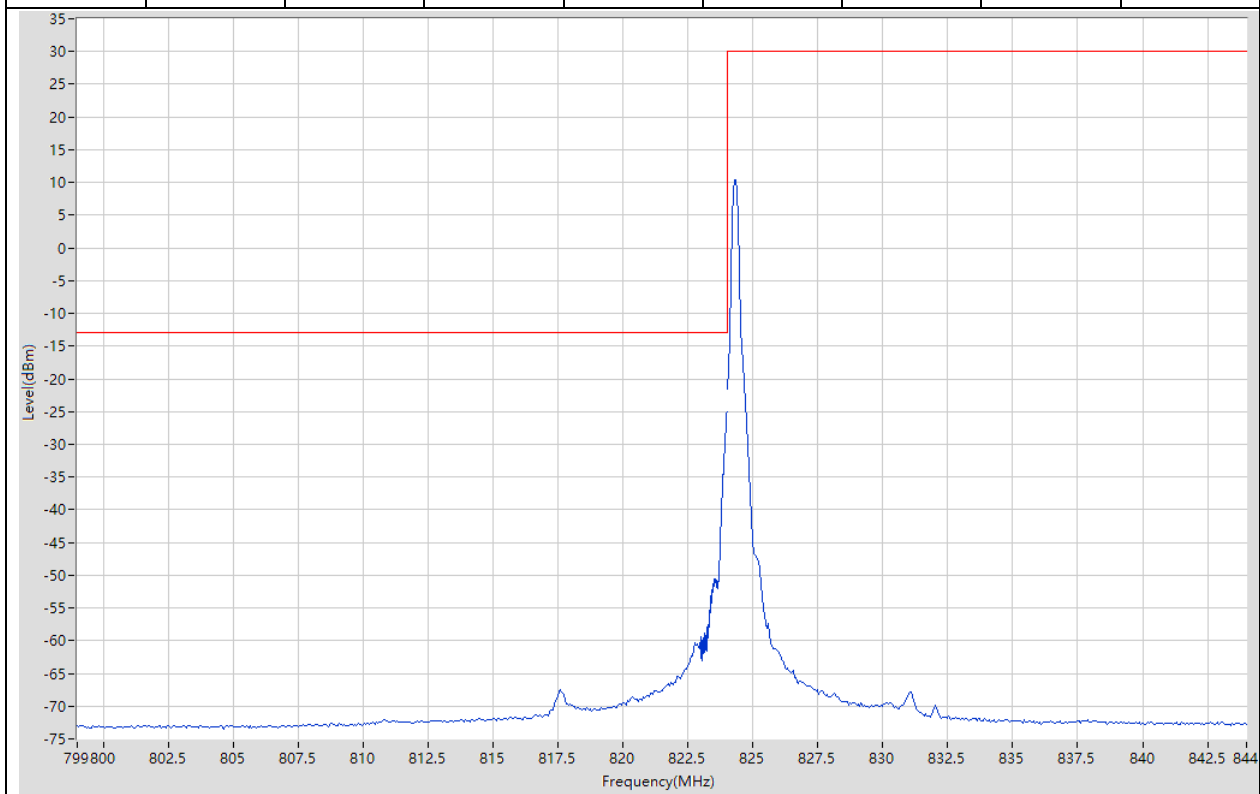

29. DC_n26(Part22)_SCS15_5M_L_Outer Full(16QAM)

29.14. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.76 | -51.21 | -13 | Pass | 401 |
| 823 | 824 | 0.051 | RMS | 824 | -38.96 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 825.5 | -2.66 | 30 | Pass | 401 |

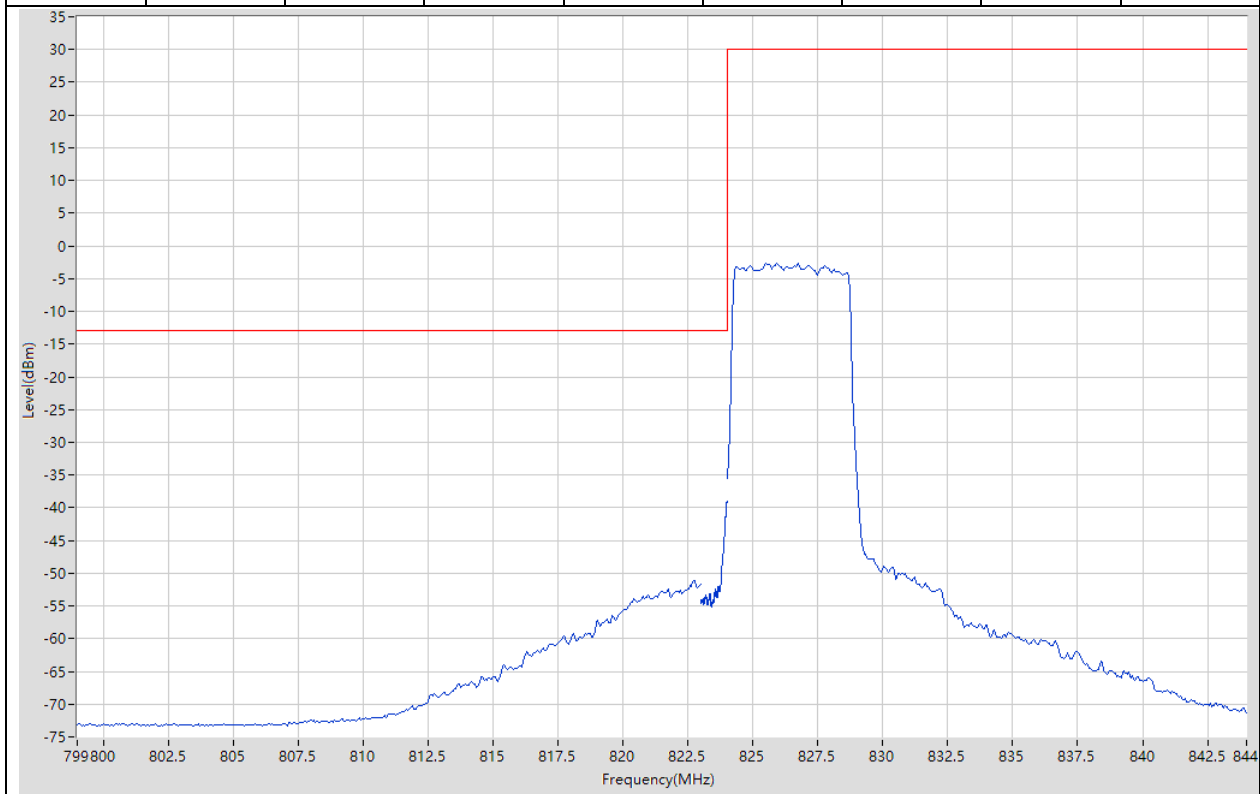

29. DC_n26(Part22)_SCS15_5M_H_Edge_1RB_Right(16QAM)

29.15. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.65 | 10.5 | 30 | Pass | 401 |
| 849 | 850 | 0.051 | RMS | 849 | -25.91 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850 | -59.99 | -13 | Pass | 401 |

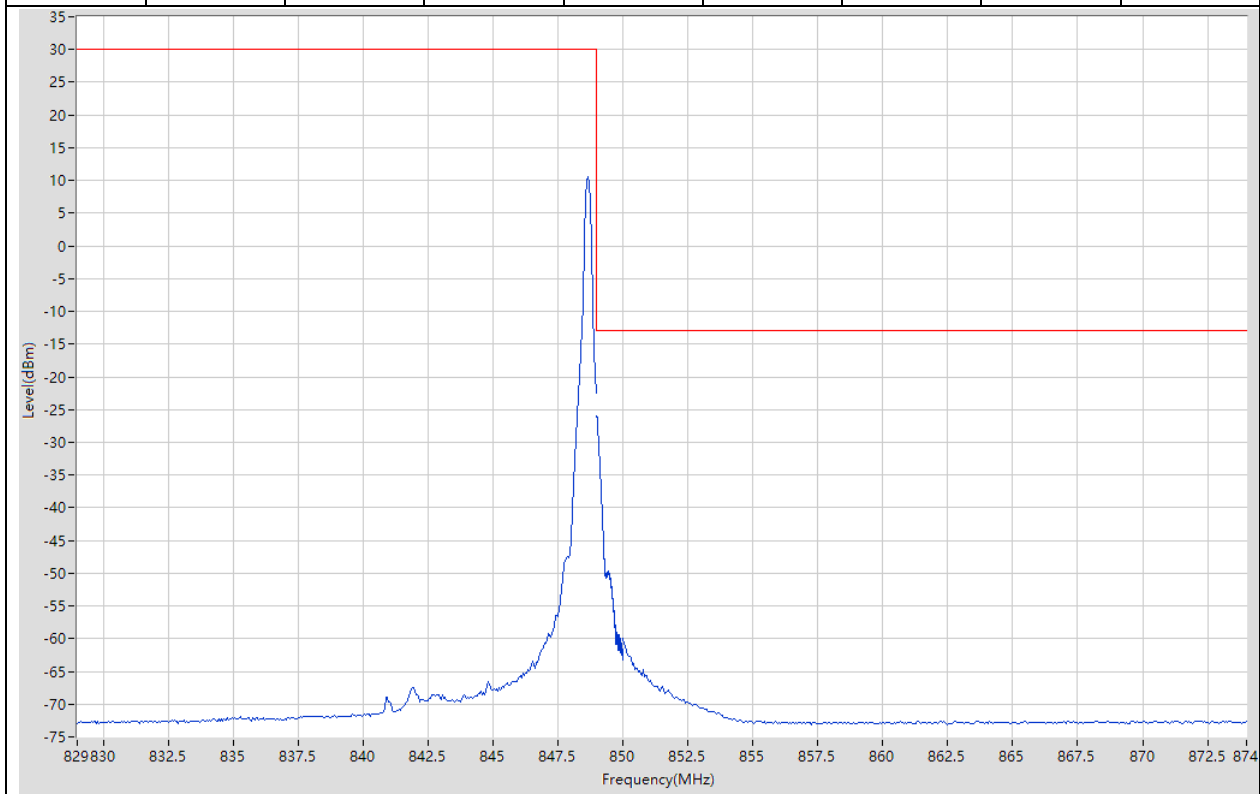

29. DC_n26(Part22)_SCS15_5M_H_Outer Full(16QAM)

29.16. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 846.75 | -2.82 | 30 | Pass | 401 |
| 849 | 850 | 0.051 | RMS | 849 | -38.39 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.36 | -45.09 | -13 | Pass | 401 |

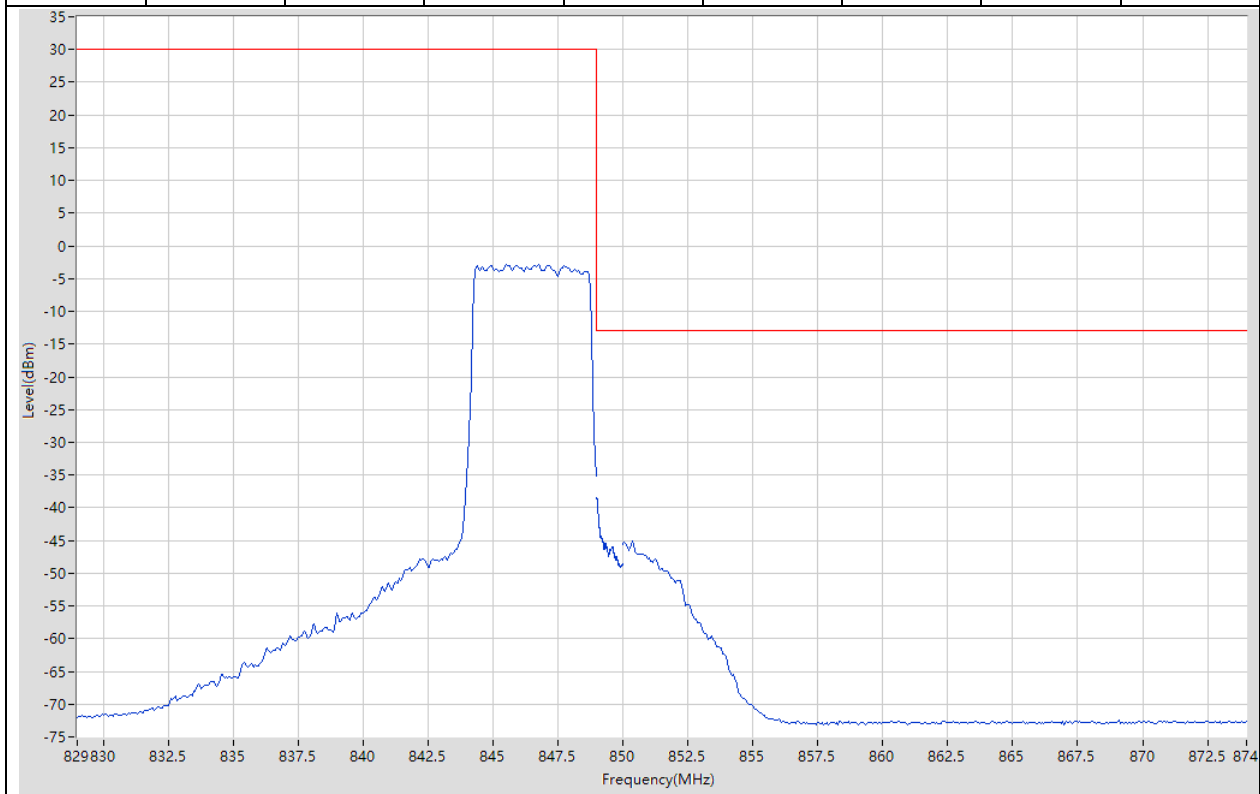

29. DC_n26(Part22)_SCS15_10M_L_Edge_1RB_Left(16QAM)

29.17. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.94 | -58.64 | -13 | Pass | 401 |
| 823 | 824 | 0.1 | RMS | 824 | -23.95 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.4 | 10.51 | 30 | Pass | 401 |

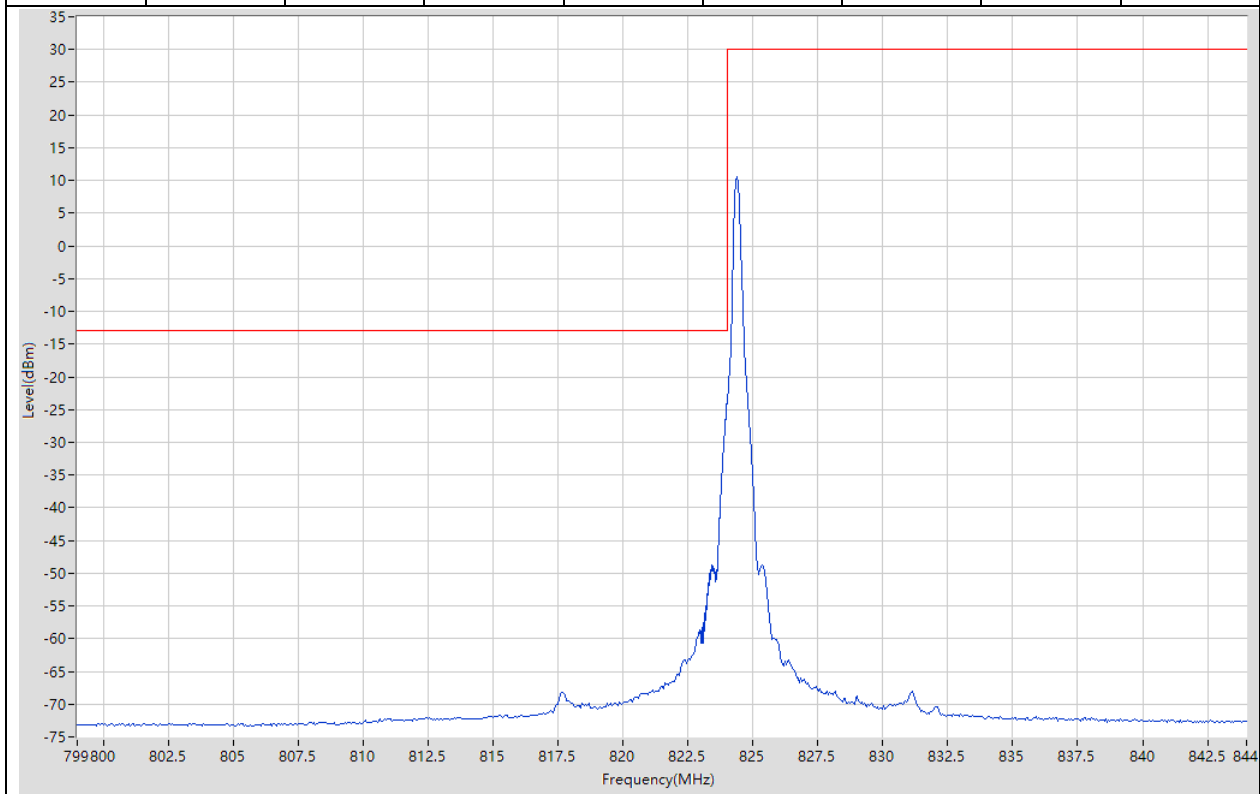

29. DC_n26(Part22)_SCS15_10M_L_Outer Full(16QAM)

29.18. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.94 | -47.95 | -13 | Pass | 401 |
| 823 | 824 | 0.1 | RMS | 824 | -40.57 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 825.1 | -5.08 | 30 | Pass | 401 |

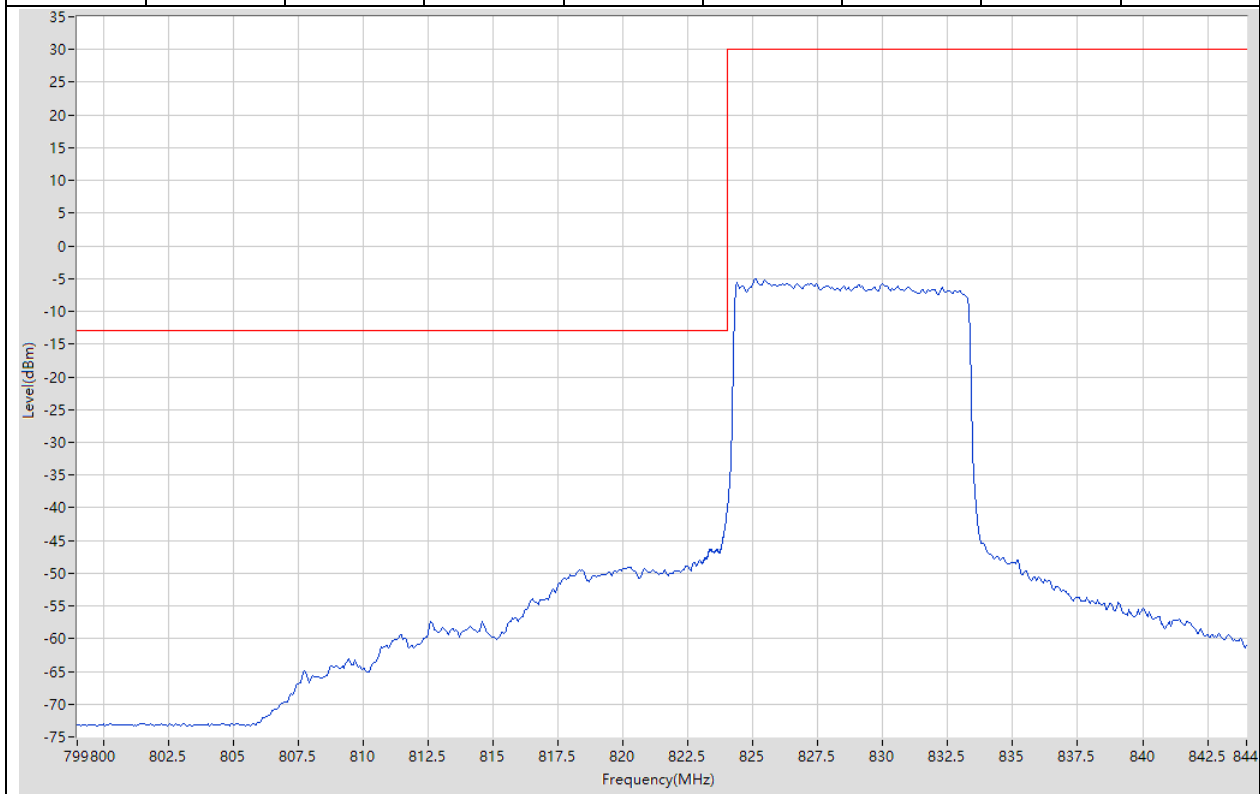

29. DC_n26(Part22)_SCS15_10M_H_Edge_1RB_Right(16QAM)

29.19. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.6 | 10.33 | 30 | Pass | 401 |
| 849 | 850 | 0.1 | RMS | 849 | -24.82 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.06 | -59.91 | -13 | Pass | 401 |

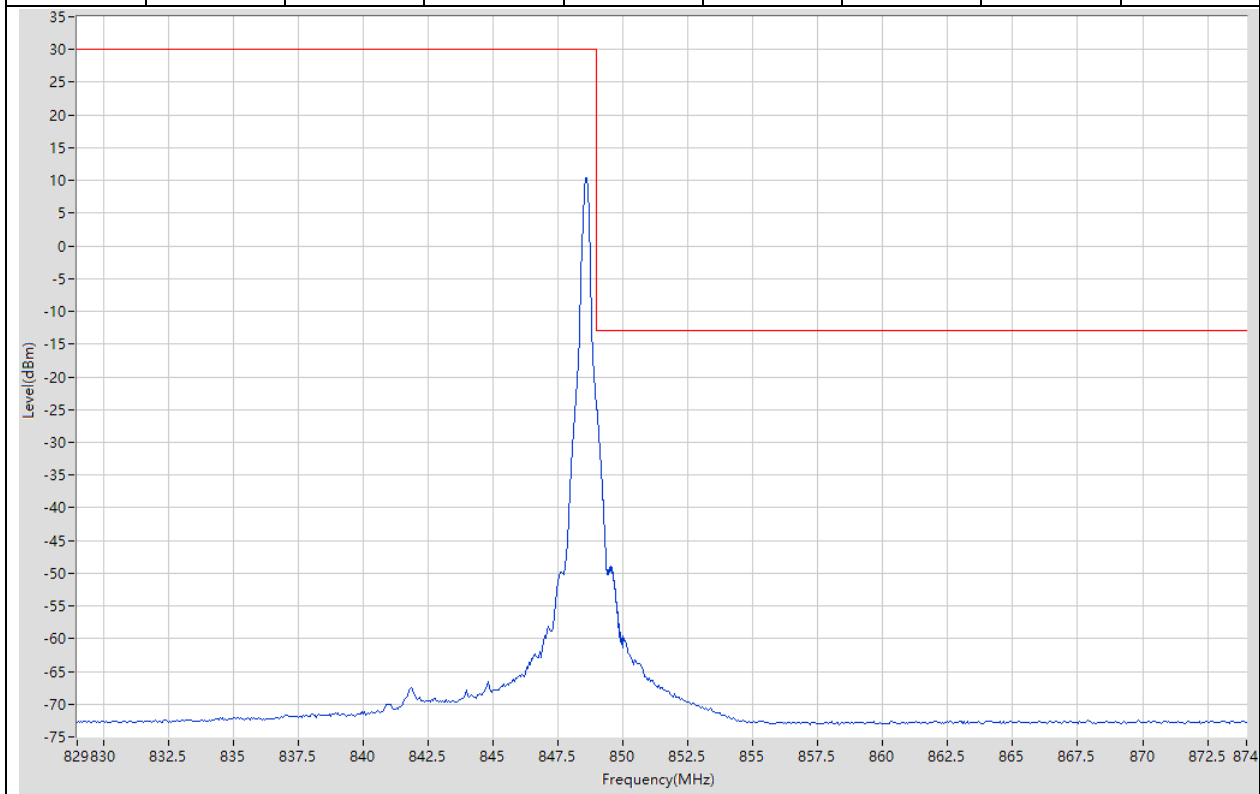

29. DC_n26(Part22)_SCS15_10M_H_Outer Full(16QAM)

29.20. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 840.1 | -5.49 | 30 | Pass | 401 |
| 849 | 850 | 0.1 | RMS | 849.023 | -45.07 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.18 | -46.35 | -13 | Pass | 401 |

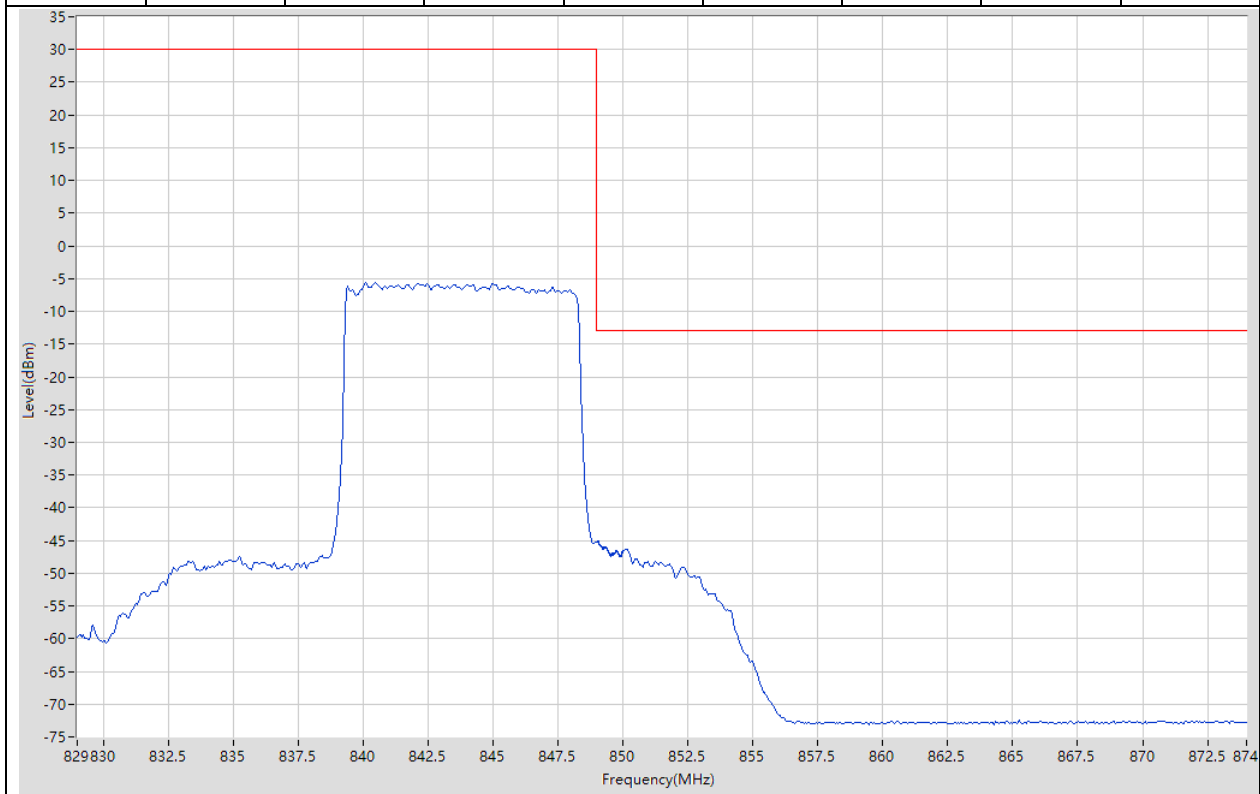

29. DC_n26(Part22)_SCS15_20M_L_Edge_1RB_Left(16QAM)

29.21. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -59.92 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 824 | -26.26 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.55 | 10.55 | 30 | Pass | 401 |

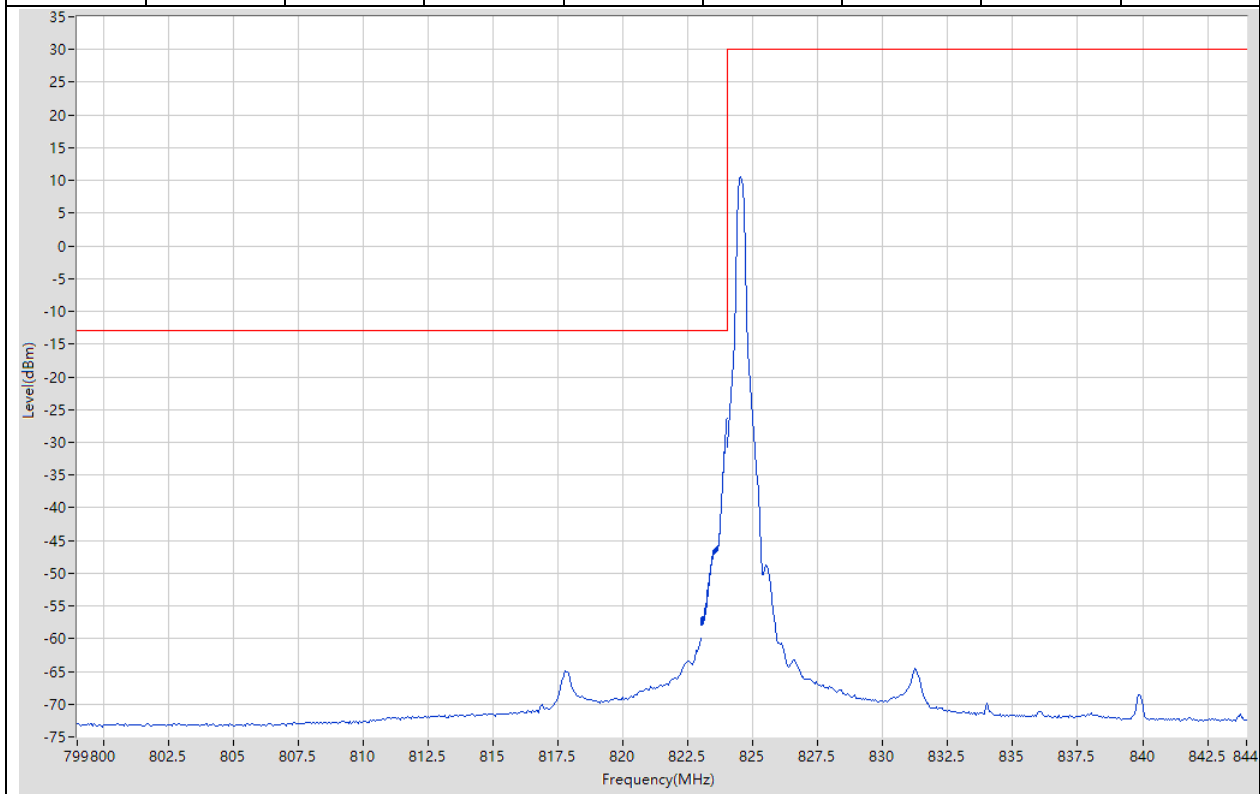

29. DC_n26(Part22)_SCS15_20M_L_Outer Full(16AQM)

29.22. NR Band Edge for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.88 | -45.09 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 824 | -39.66 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 826.05 | -8.31 | 30 | Pass | 401 |

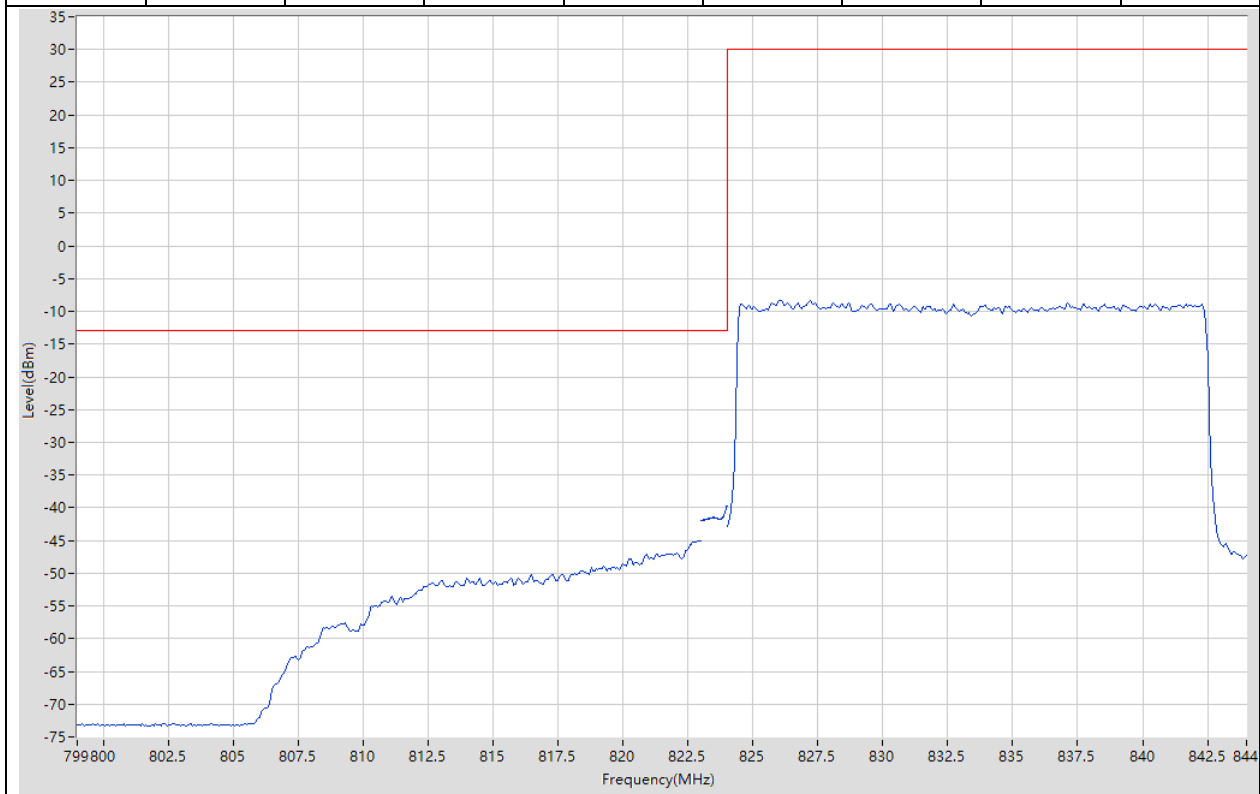

29. DC_n26(Part22)_SCS15_20M_H_Edge_1RB_Right(16AQM)

29.23. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.45 | 10.38 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849 | -27.7 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850 | -60.77 | -13 | Pass | 401 |

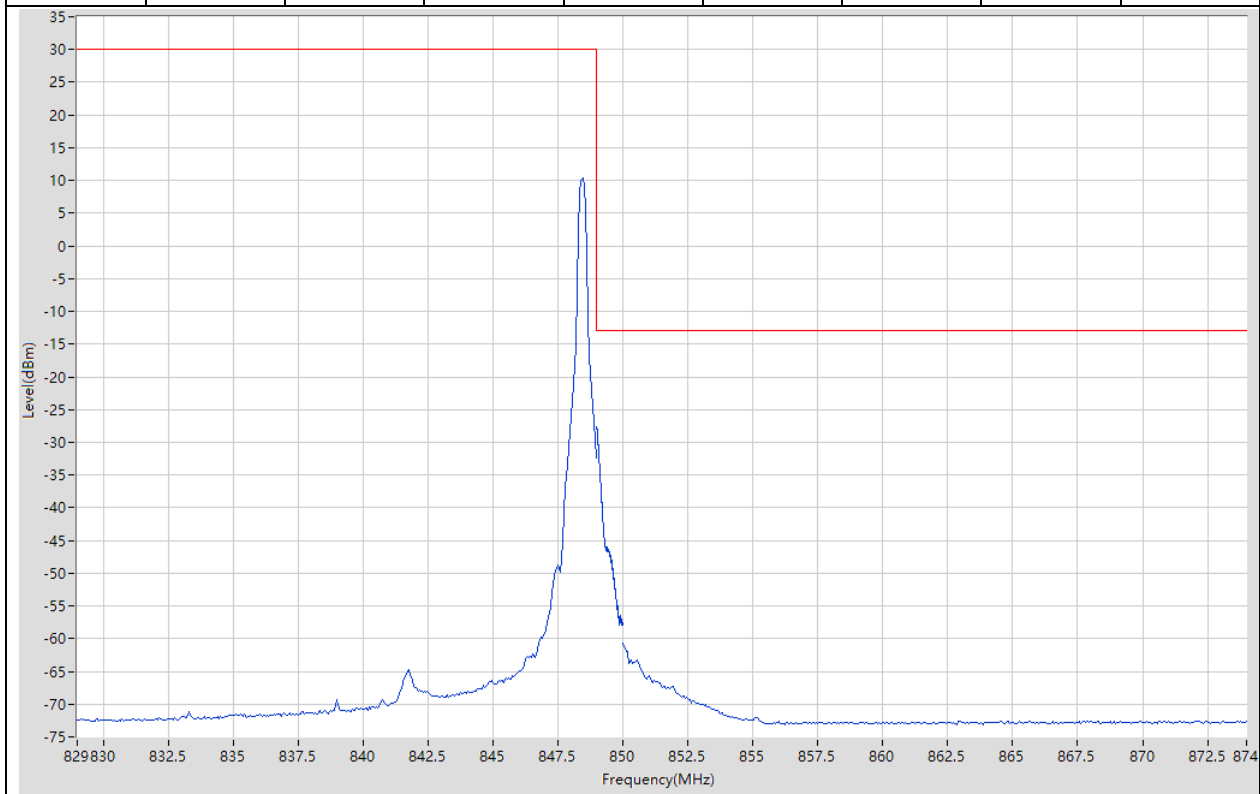

29. DC_n26(Part22)_SCS15_20M_H_Outer Full(16AQM)

29.24. NR Band Edge for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 842.1 | -8.19 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849.003 | -46.81 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.12 | -50.38 | -13 | Pass | 401 |

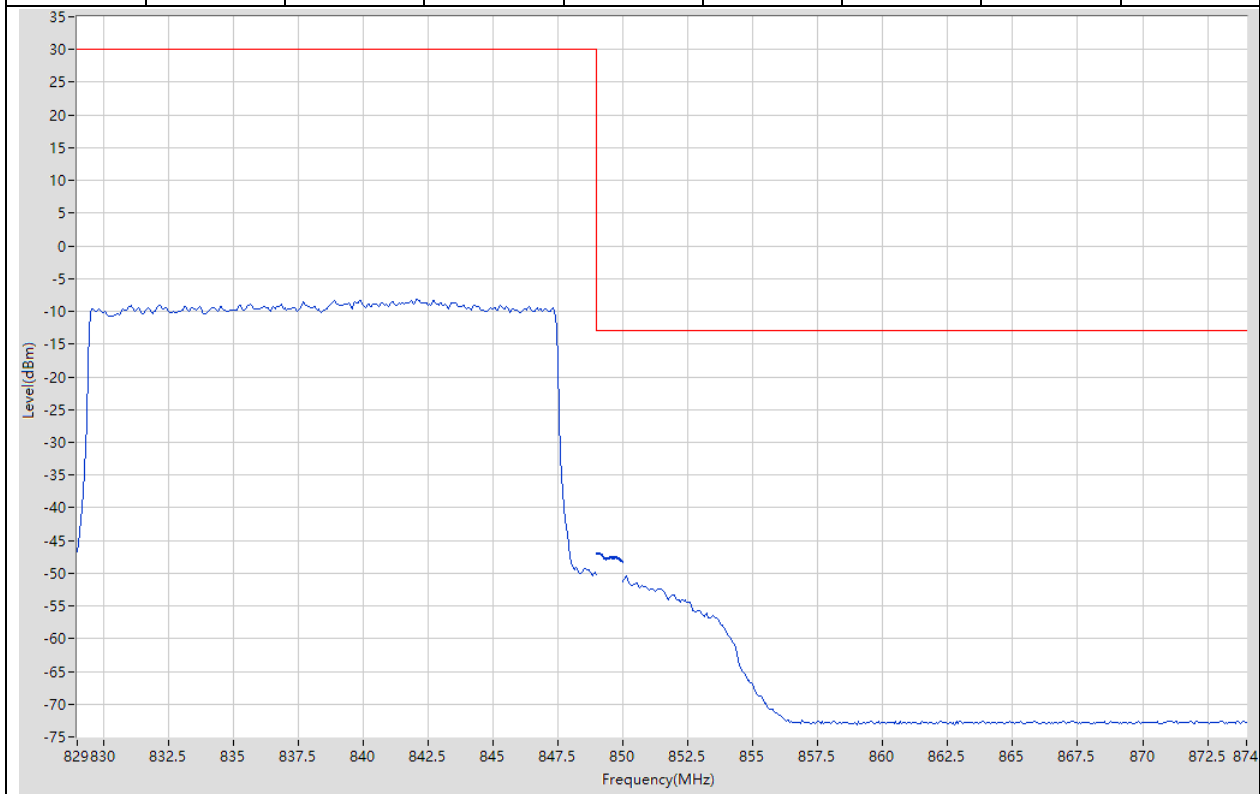

30. NR_n26(Part90)_SCS15_5M_L_Edge_1RB_Left(QPSK)

30.1. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.051 | RMS | 813.963 | -28.36 | -13 | Pass | 401 |
| 813.962 | 814 | 0.051 | RMS | 814 | -25.84 | -20 | Pass | 401 |

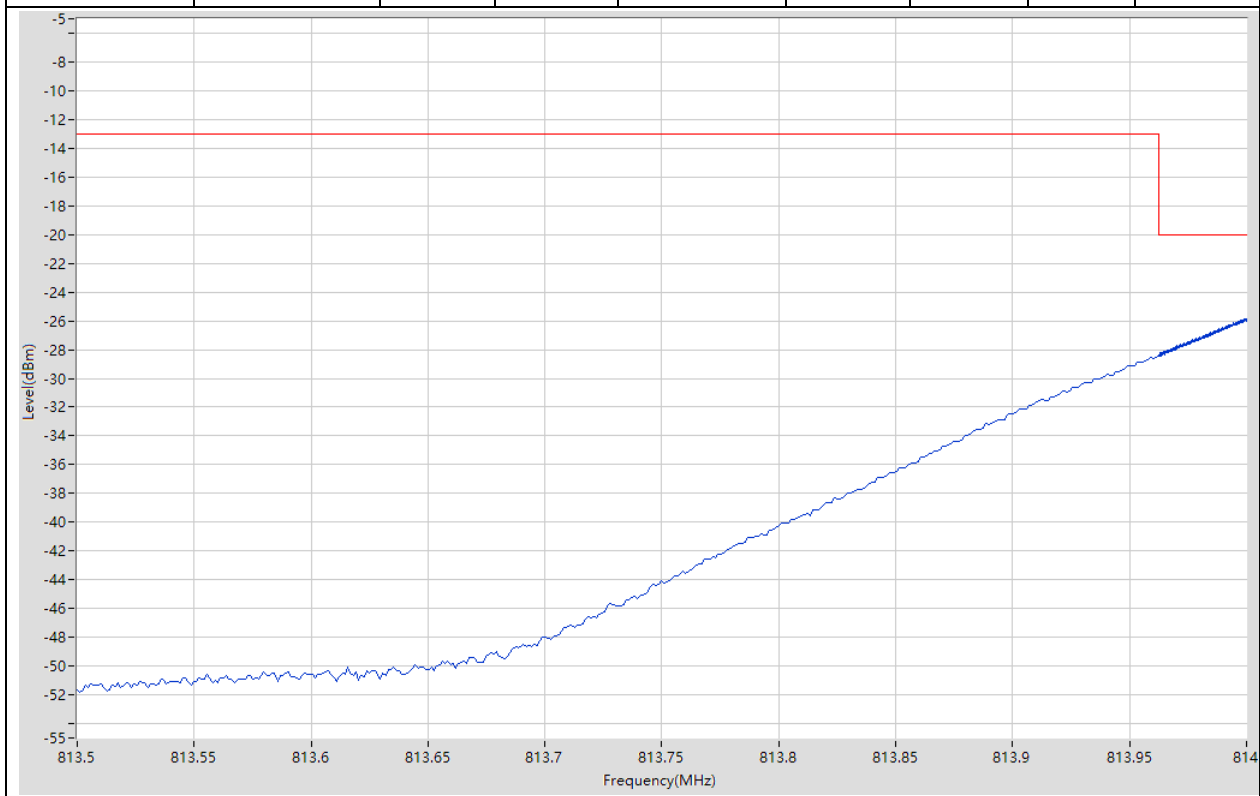

30. NR_n26(Part90)_SCS15_5M_L_Outer_Full(QPSK)

30.2. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.051 | RMS | 813.963 | -38.58 | -13 | Pass | 401 |
| 813.962 | 814 | 0.051 | RMS | 814 | -36.55 | -20 | Pass | 401 |

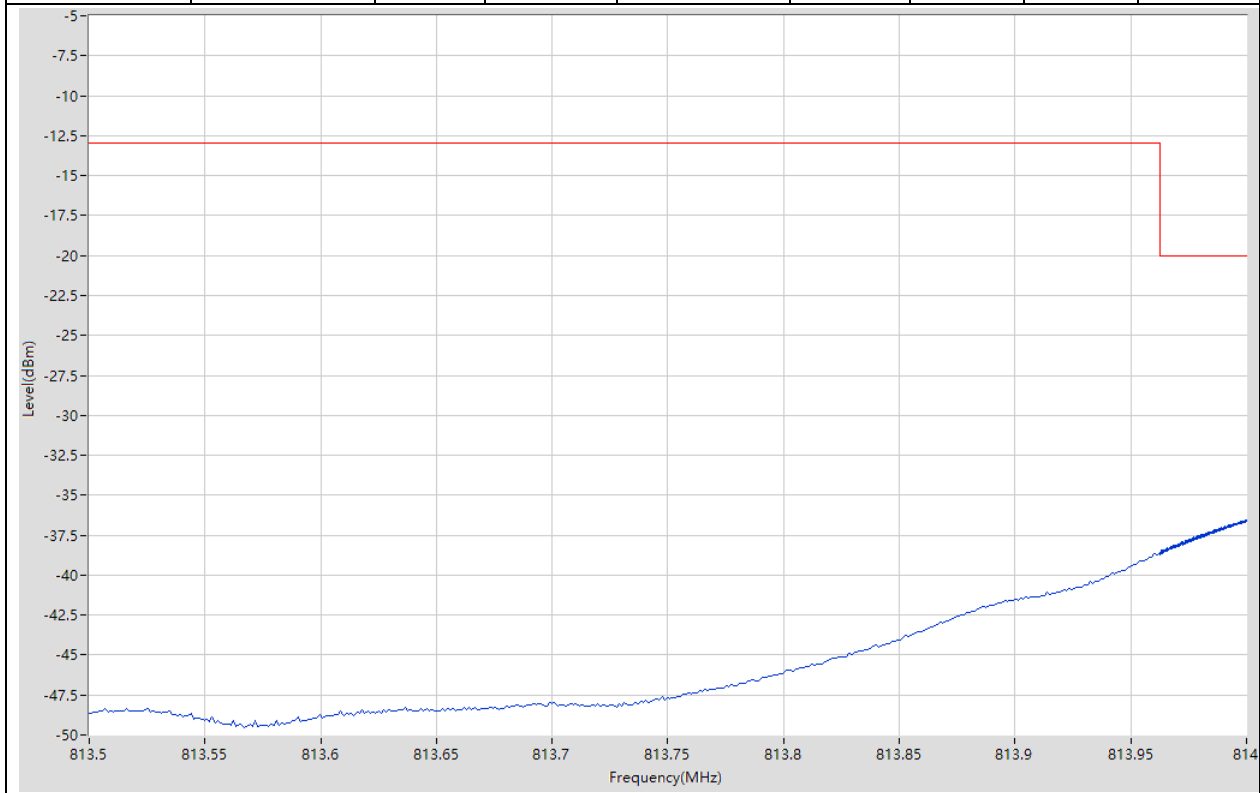

30. NR_n26(Part90)_SCS15_5M_H_Edge_1RB_Right(QPSK)

30.3. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.051 | RMS | 824 | -25.64 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.051 | RMS | 824.038 | -27.94 | -13 | Pass | 401 |

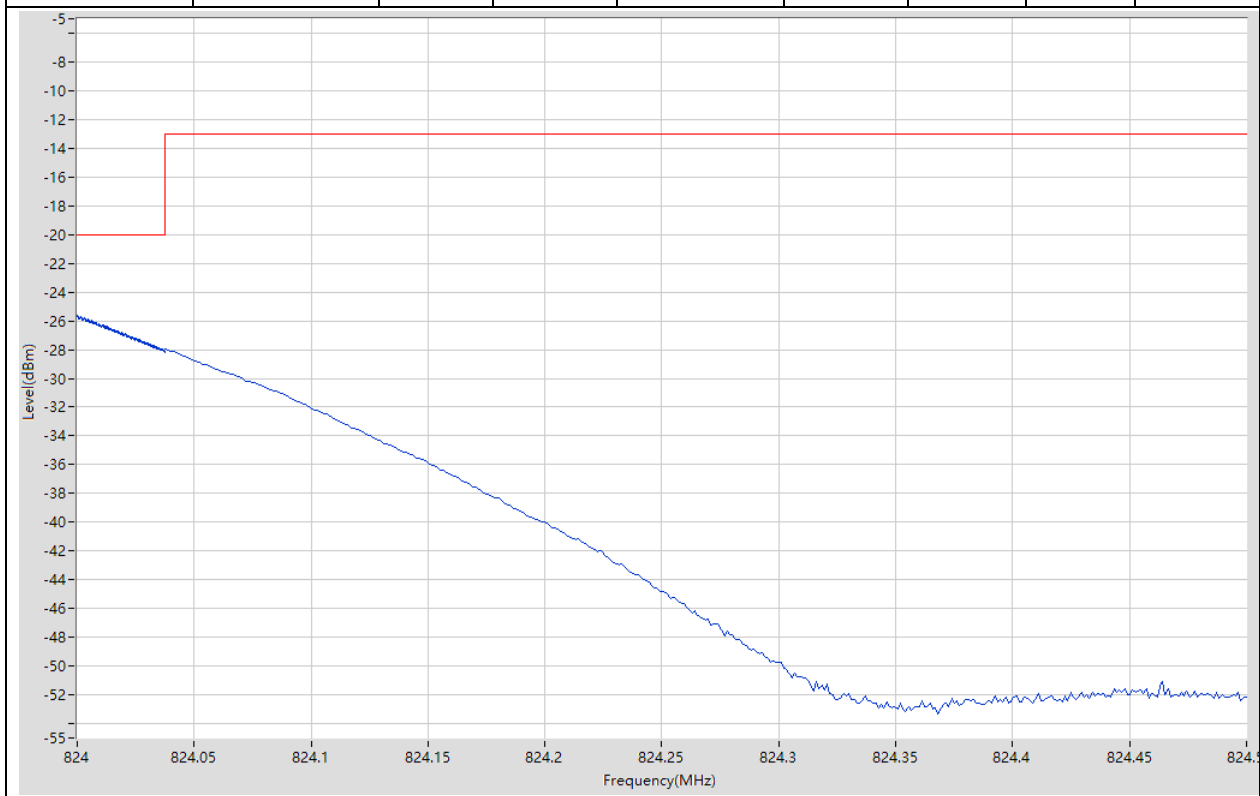

30. NR_n26(Part90)_SCS15_5M_H_Outer_Full(QPSK)

30.4. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.051 | RMS | 824.001 | -39.03 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.051 | RMS | 824.038 | -41.21 | -13 | Pass | 401 |

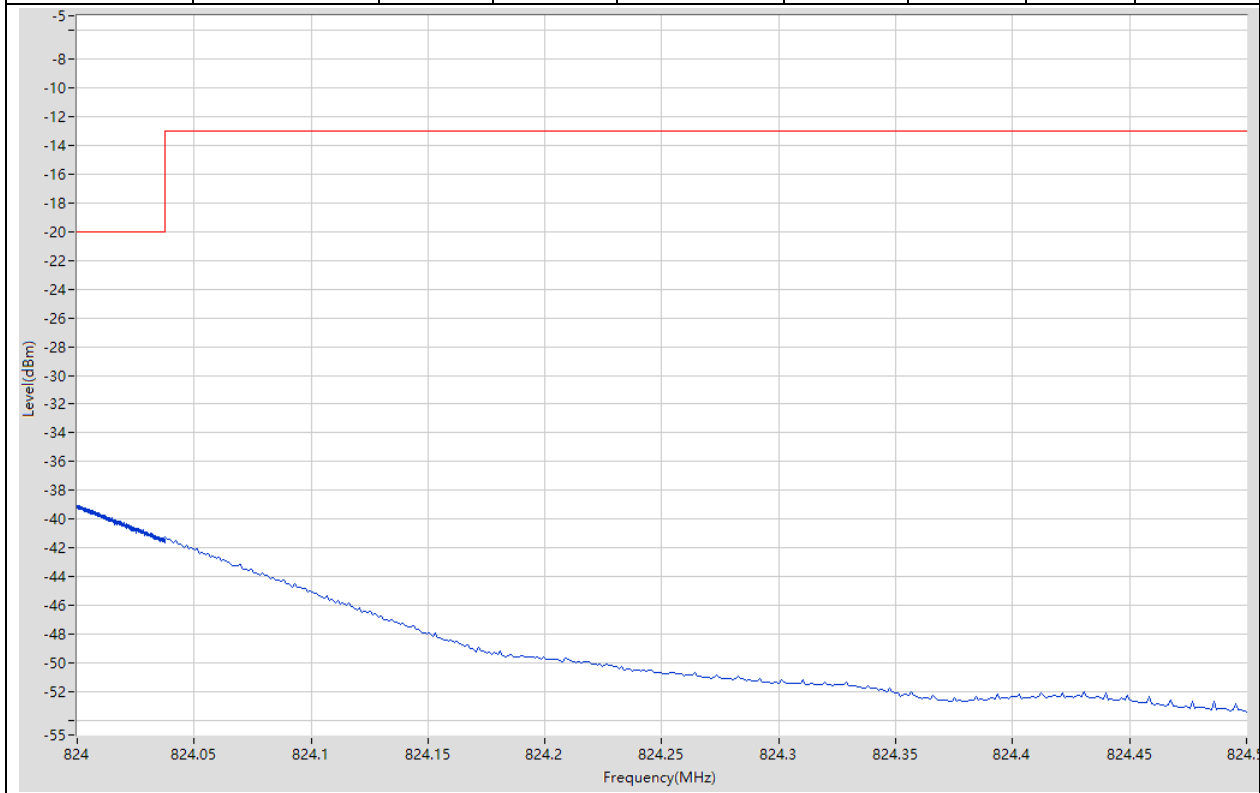

30. NR_n26(Part90)_SCS15_10M_L_Edge_1RB_Left(QPSK)

30.5. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.1 | RMS | 813.96 | -26.52 | -13 | Pass | 401 |
| 813.962 | 814 | 0.1 | RMS | 814 | -24.54 | -20 | Pass | 401 |

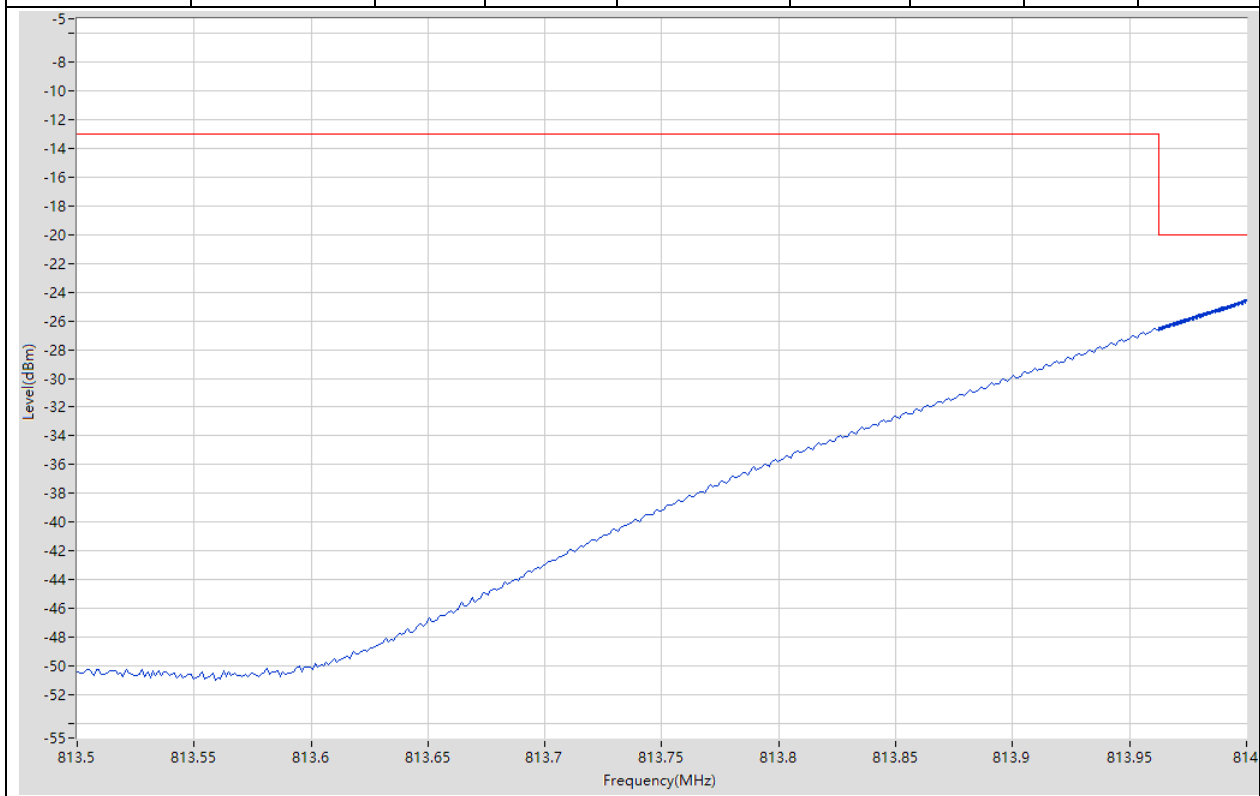

30. NR_n26(Part90)_SCS15_10M_L_Outer_Full(QPSK)

30.6. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.1 | RMS | 813.963 | -40.04 | -13 | Pass | 401 |
| 813.962 | 814 | 0.1 | RMS | 813.999 | -38.32 | -20 | Pass | 401 |

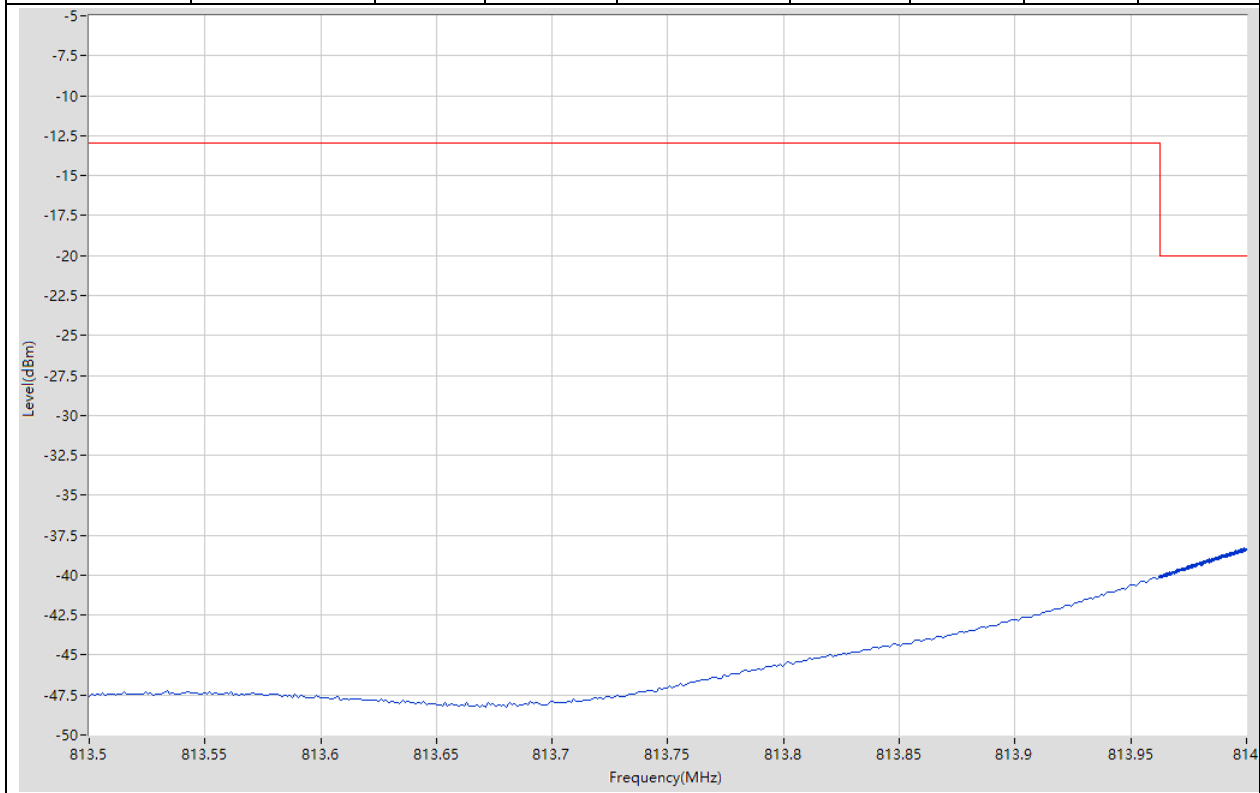

30. NR_n26(Part90)_SCS15_10M_H_Edge_1RB_Right(QPSK)

30.7. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.1 | RMS | 824 | -24.86 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.1 | RMS | 824.038 | -26.8 | -13 | Pass | 401 |

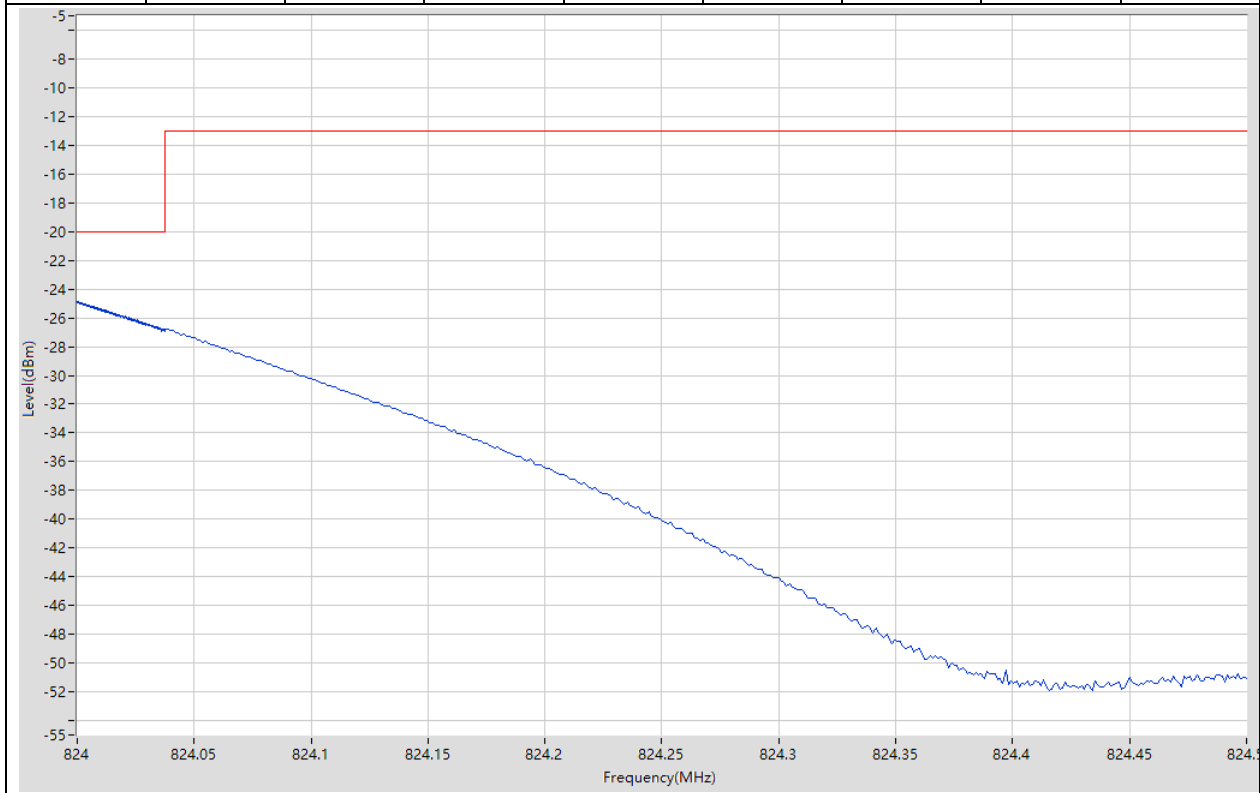

30. NR_n26(Part90)_SCS15_10M_H_Outer_Full(QPSK)

30.8. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.1 | RMS | 824.001 | -47.15 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.1 | RMS | 824.328 | -46.96 | -13 | Pass | 401 |

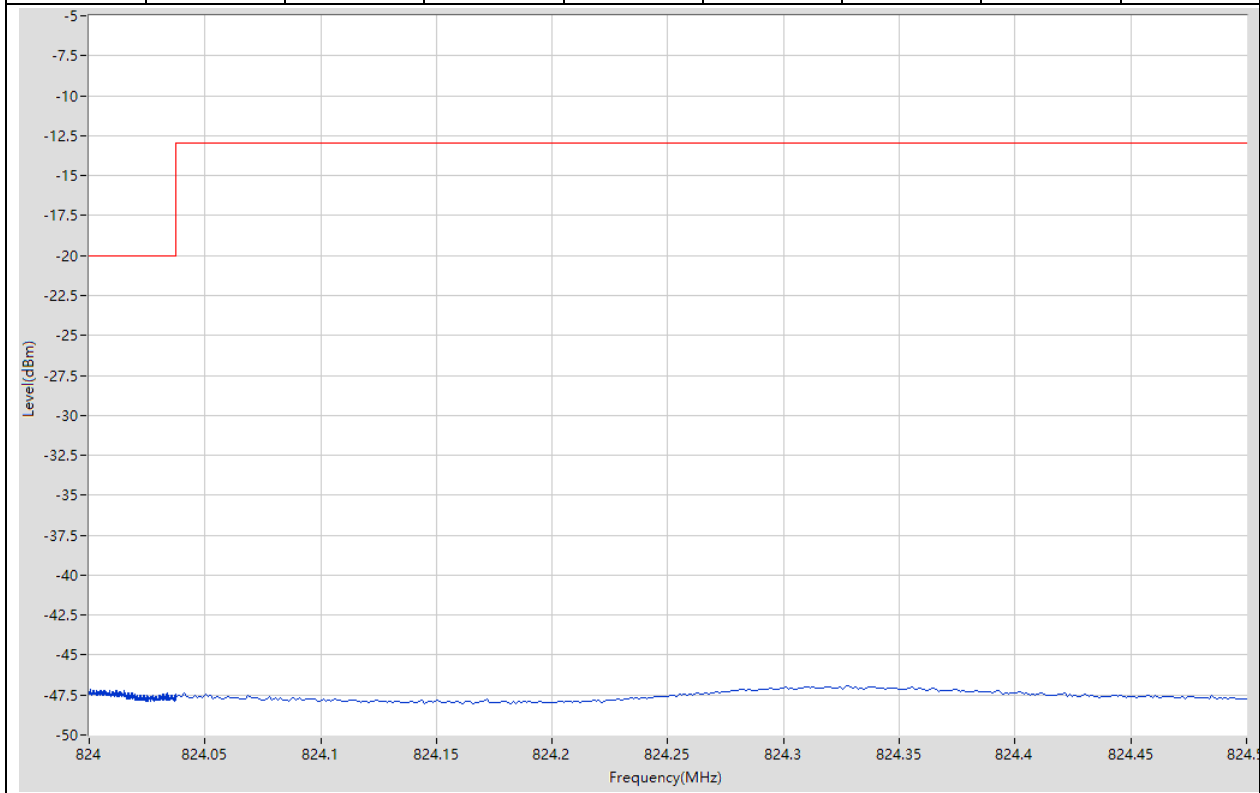

30. NR_n26(Part90)_SCS15_5M_L_Edge_1RB_Left(16QAM)

30.9. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.051 | RMS | 813.963 | -27.04 | -13 | Pass | 401 |
| 813.962 | 814 | 0.051 | RMS | 814 | -24.62 | -20 | Pass | 401 |

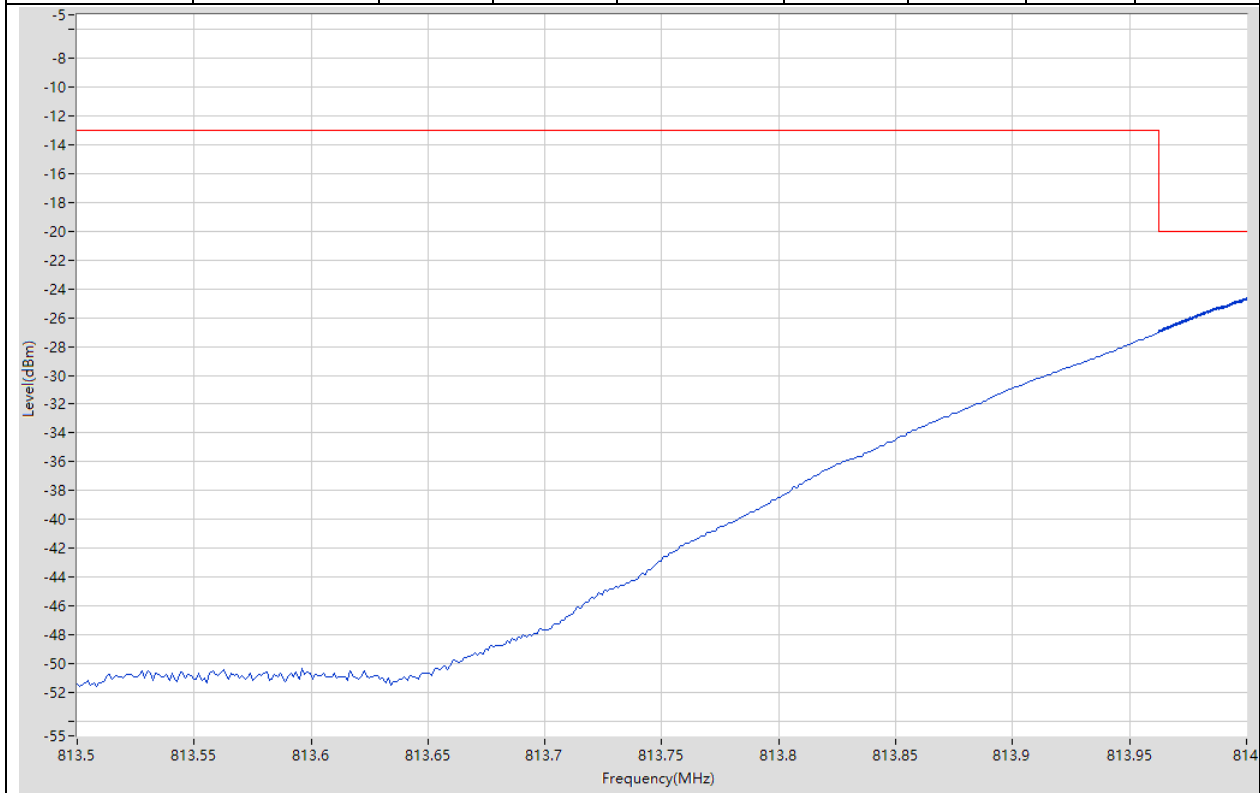

30. NR_n26(Part90)_SCS15_5M_L_Outer_Full(16QAM)

30.10. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.051 | RMS | 813.963 | -40.16 | -13 | Pass | 401 |
| 813.962 | 814 | 0.051 | RMS | 814 | -38.4 | -20 | Pass | 401 |

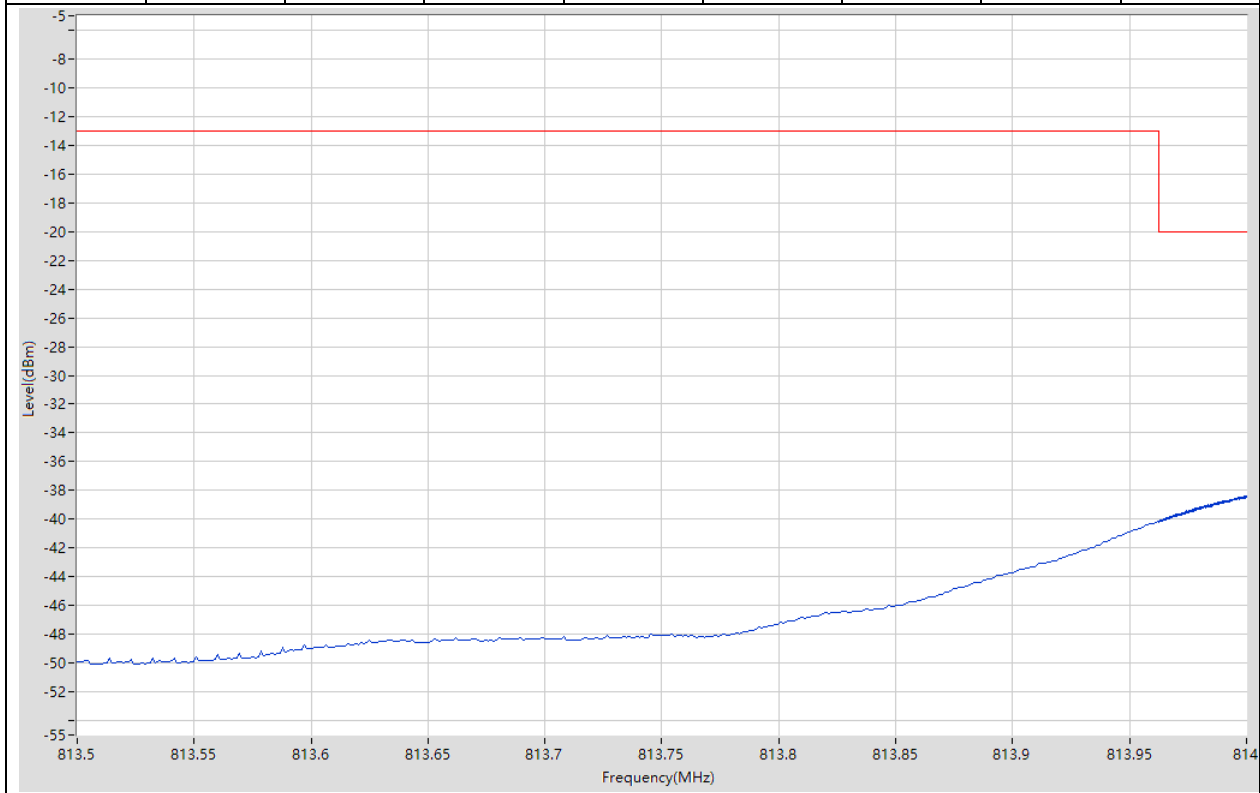

30. NR_n26(Part90)_SCS15_5M_H_Edge_1RB_Right(16QAM)

30.11. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.051 | RMS | 824 | -26.02 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.051 | RMS | 824.038 | -28.44 | -13 | Pass | 401 |

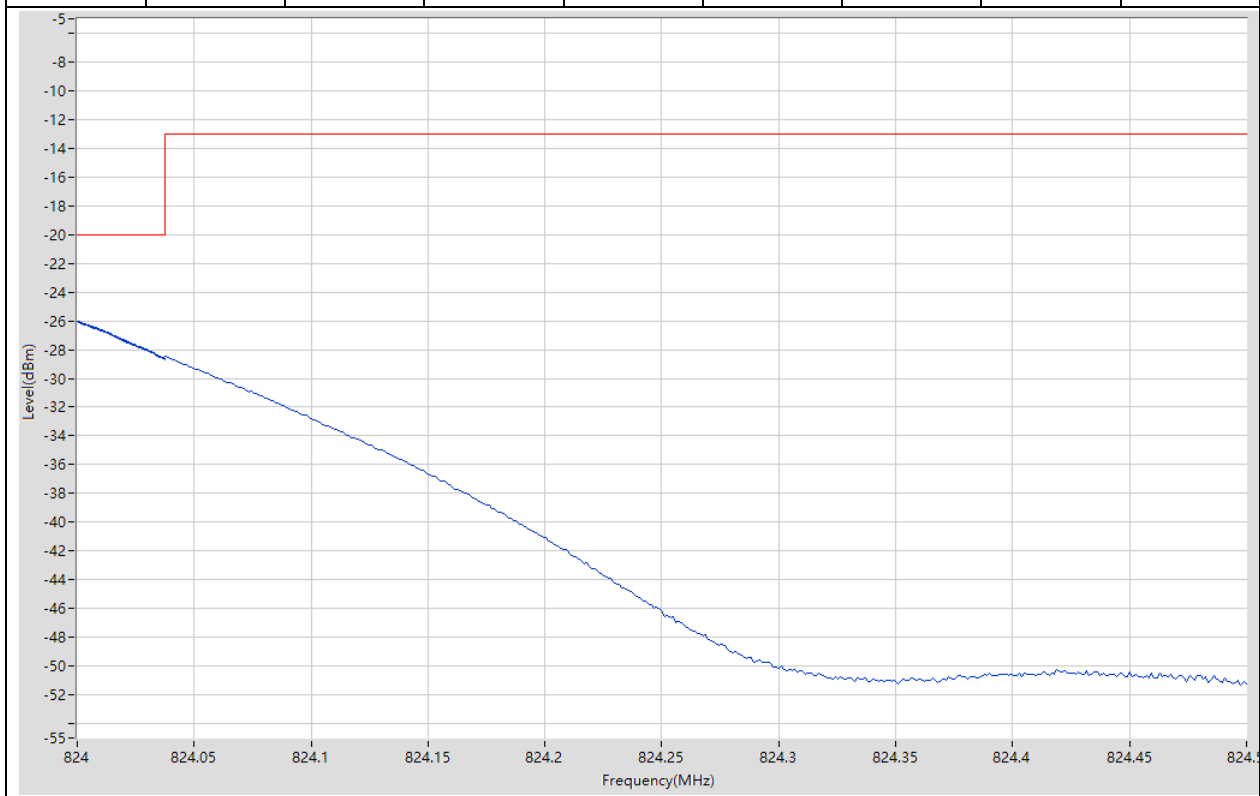

30. NR_n26(Part90)_SCS15_5M_H_Outer_Full(16QAM)

30.12. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.051 | RMS | 824 | -38.09 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.051 | RMS | 824.038 | -40.22 | -13 | Pass | 401 |

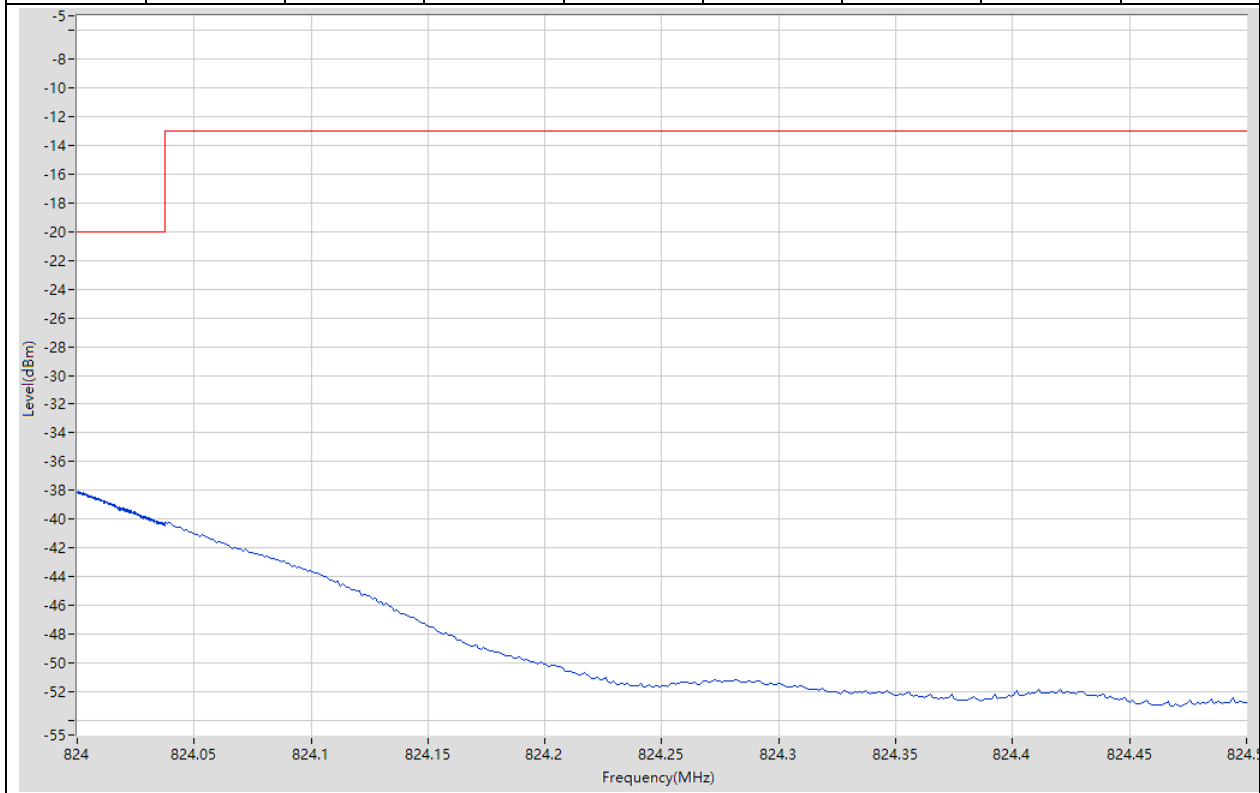

30. NR_n26(Part90)_SCS15_10M_L_Edge_1RB_Left(16QAM)

30.13. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.1 | RMS | 813.963 | -25.65 | -13 | Pass | 401 |
| 813.962 | 814 | 0.1 | RMS | 814 | -23.59 | -20 | Pass | 401 |

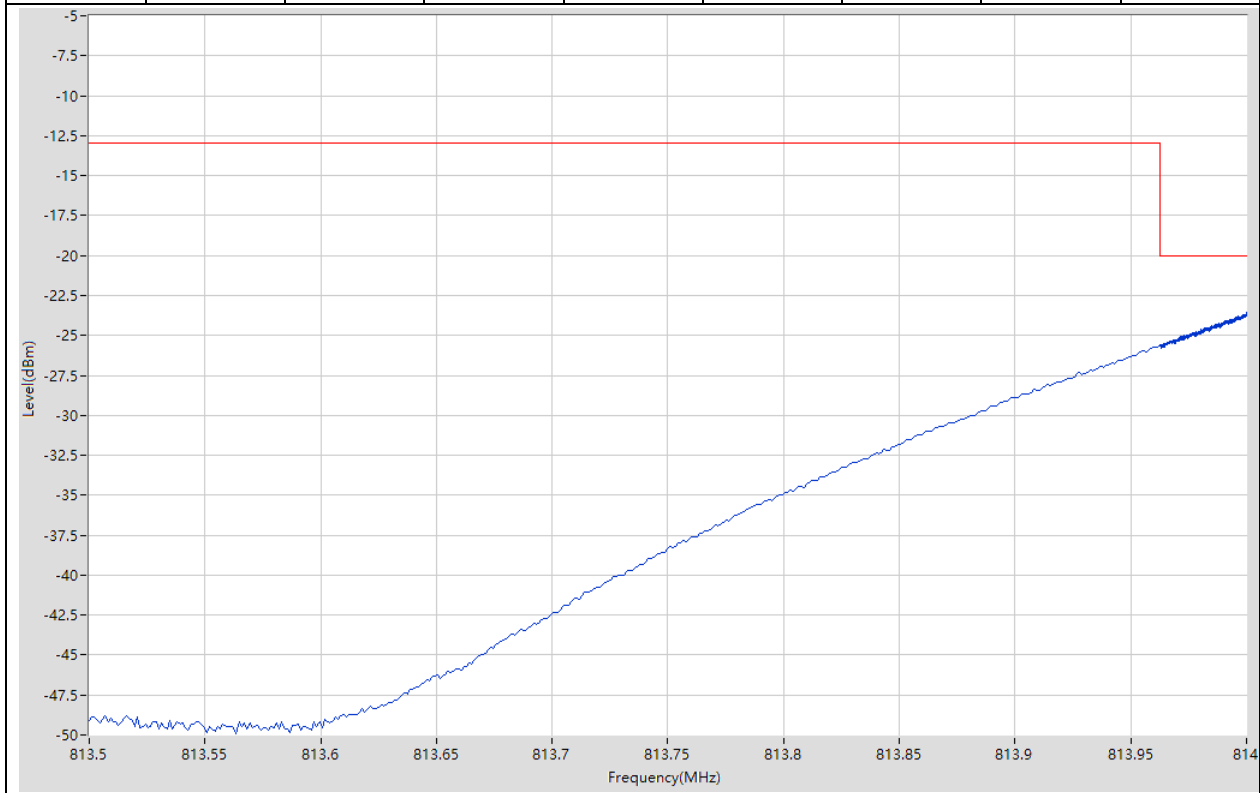

30. NR_n26(Part90)_SCS15_10M_L_Outer_Full(16QAM)

30.14. NR Band Edge_in-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 813.5 | 813.962 | 0.1 | RMS | 813.963 | -43.31 | -13 | Pass | 401 |
| 813.962 | 814 | 0.1 | RMS | 813.999 | -42.1 | -20 | Pass | 401 |

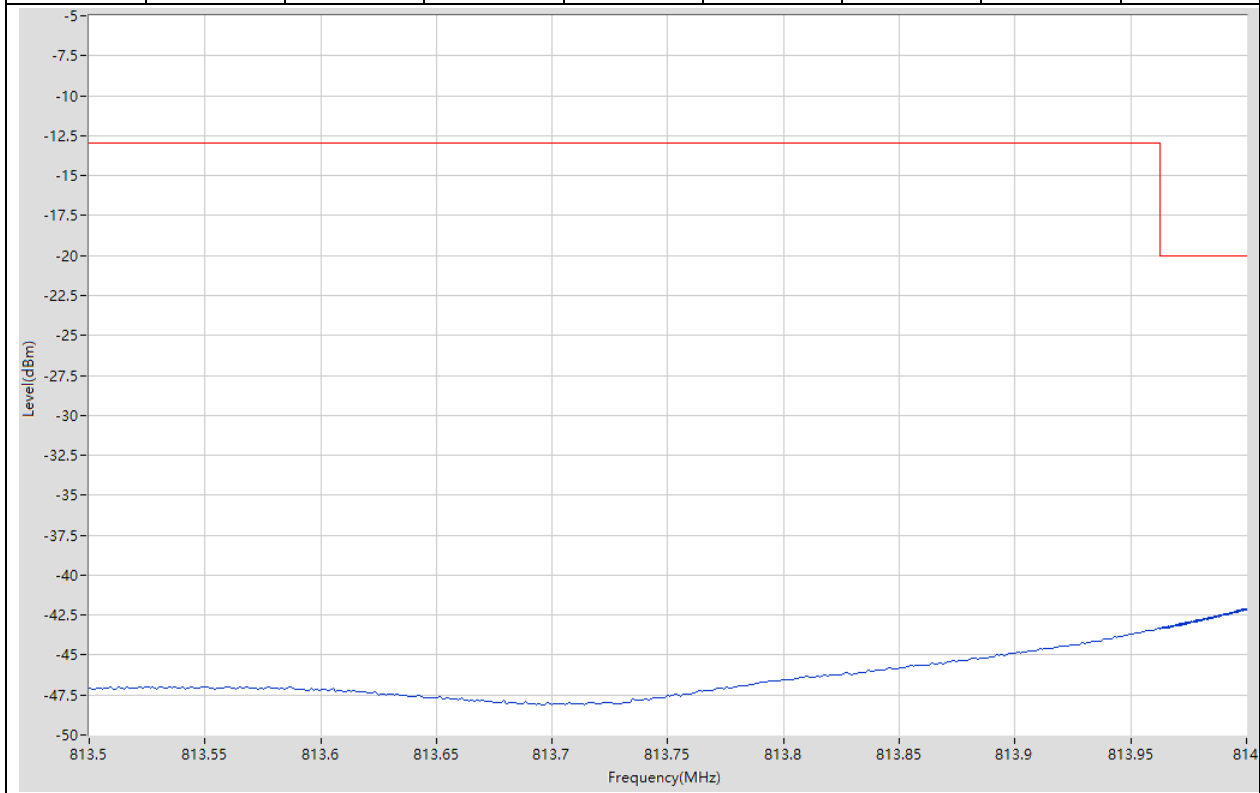

30. NR_n26(Part90)_SCS15_10M_H_Edge_1RB_Right(16QAM)

30.15. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.1 | RMS | 824.002 | -24.98 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.1 | RMS | 824.038 | -26.85 | -13 | Pass | 401 |

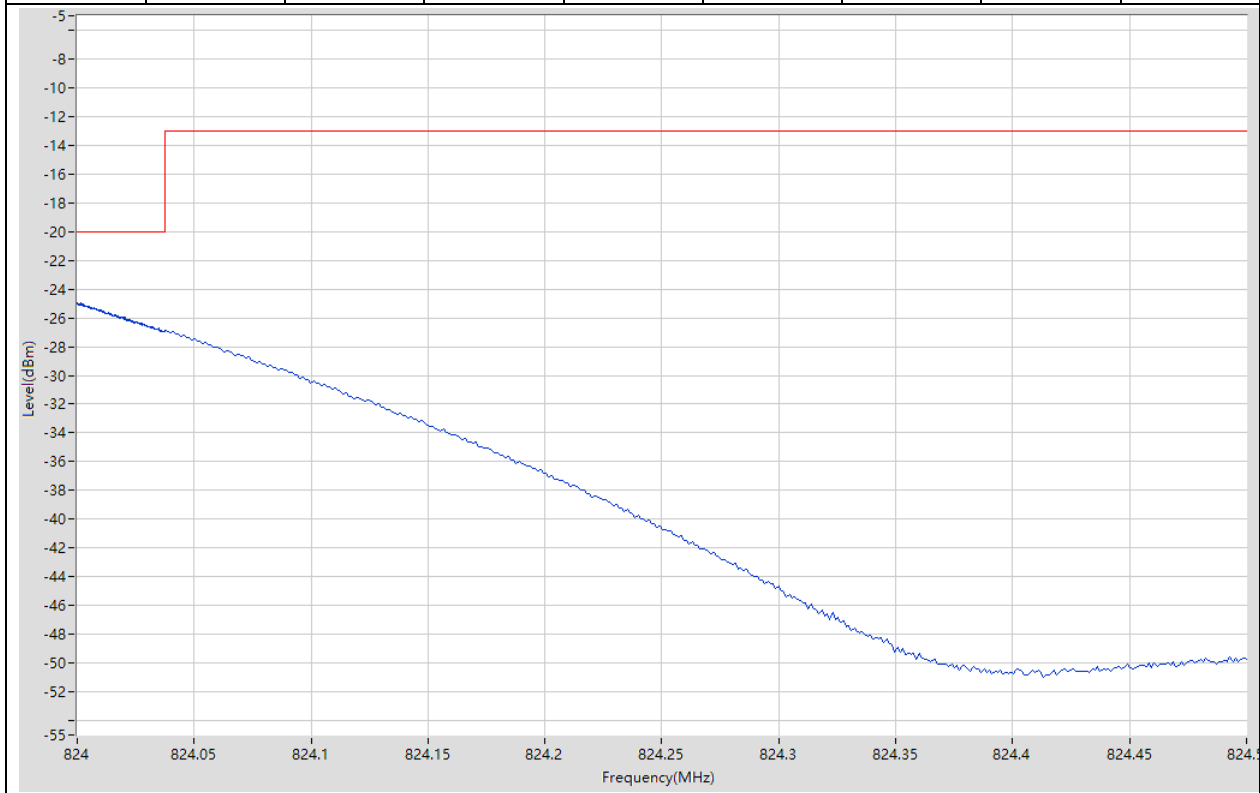

30. NR_n26(Part90)_SCS15_10M_H_Outer_Full(16QAM)

30.16. NR Band Edge_in-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824 | 824.038 | 0.1 | RMS | 824.012 | -48.05 | -20 | Pass | 401 |
| 824.038 | 824.5 | 0.1 | RMS | 824.184 | -47.45 | -13 | Pass | 401 |

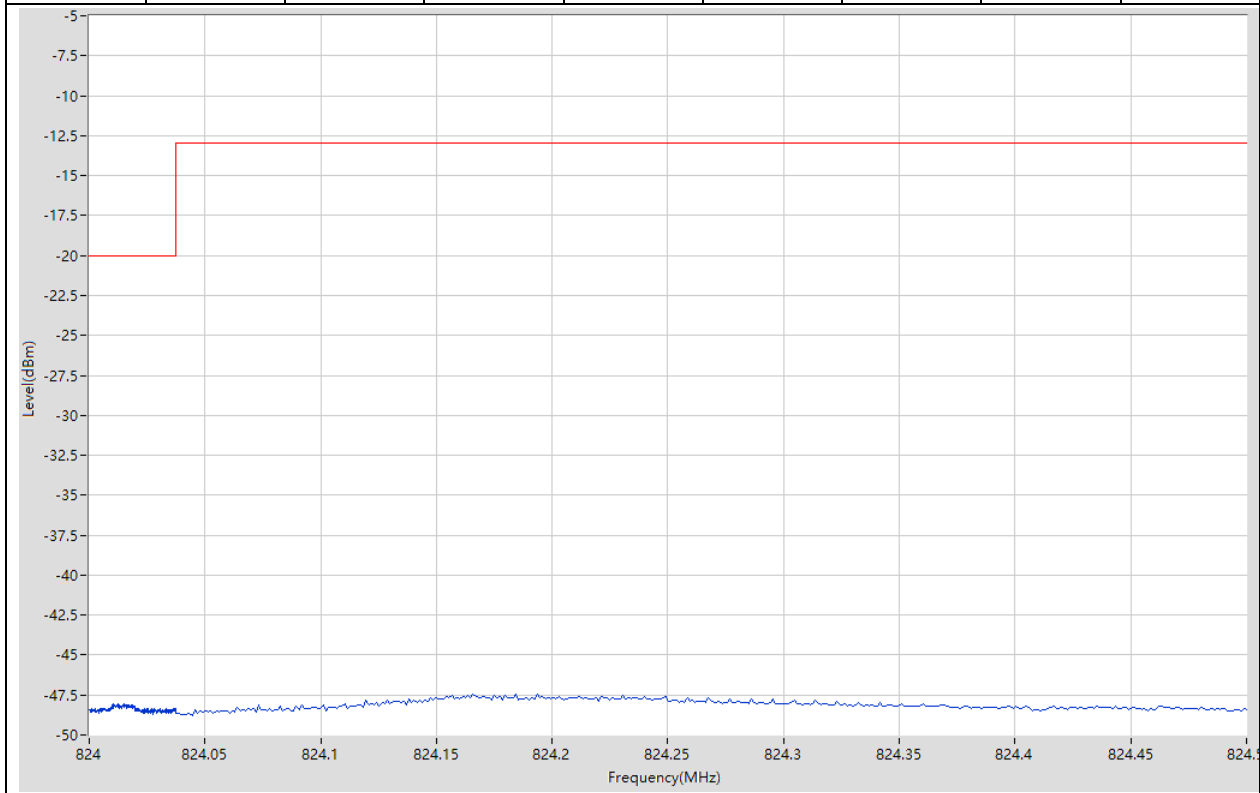

31. NR_n26(Part90)_SCS15_5M_L_Edge_1RB_Left(QPSK)

31.1. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -24.87 | -13 | Pass | 401 |

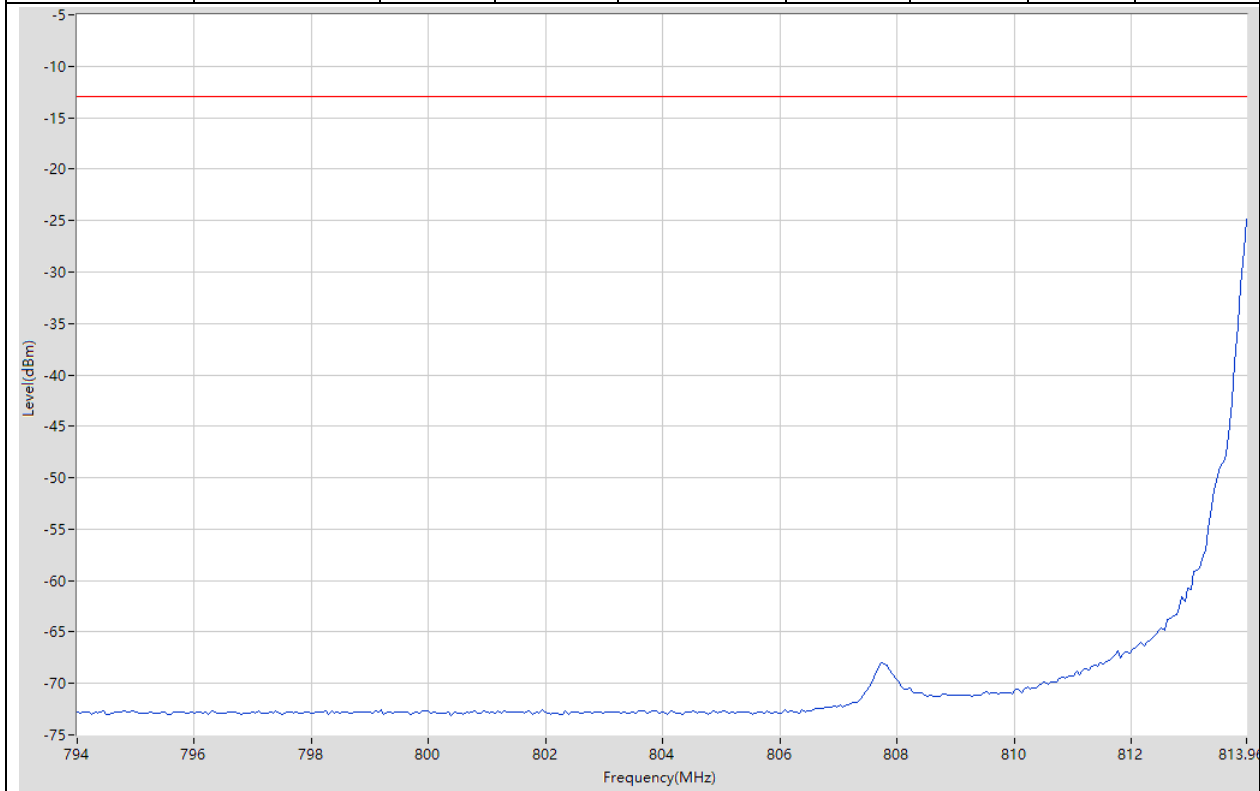

31. NR_n26(Part90)_SCS15_5M_L_Outer_Full(QPSK)

31.2. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -35.16 | -13 | Pass | 401 |

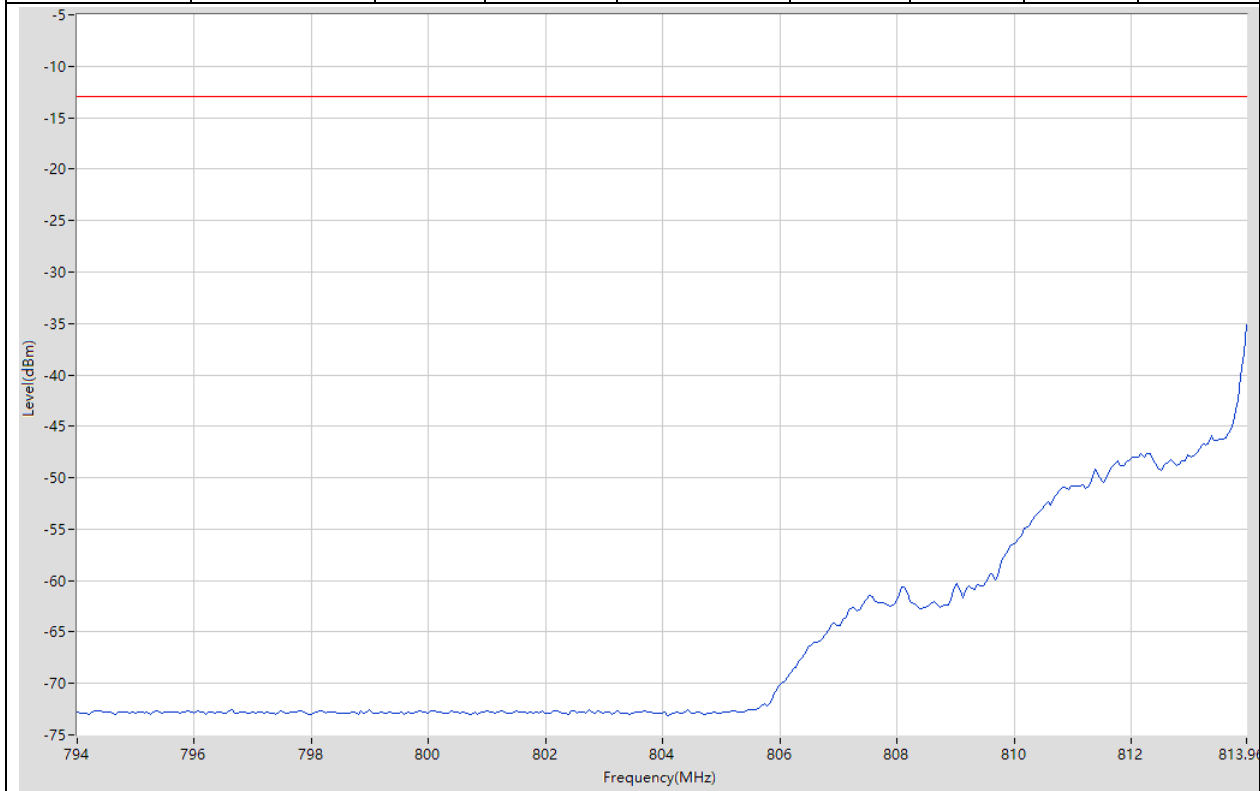

31. NR_n26(Part90)_SCS15_5M_H_Edge_1RB_Right(QPSK)

31.3. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 824.038 | -24.66 | -13 | Pass | 401 |

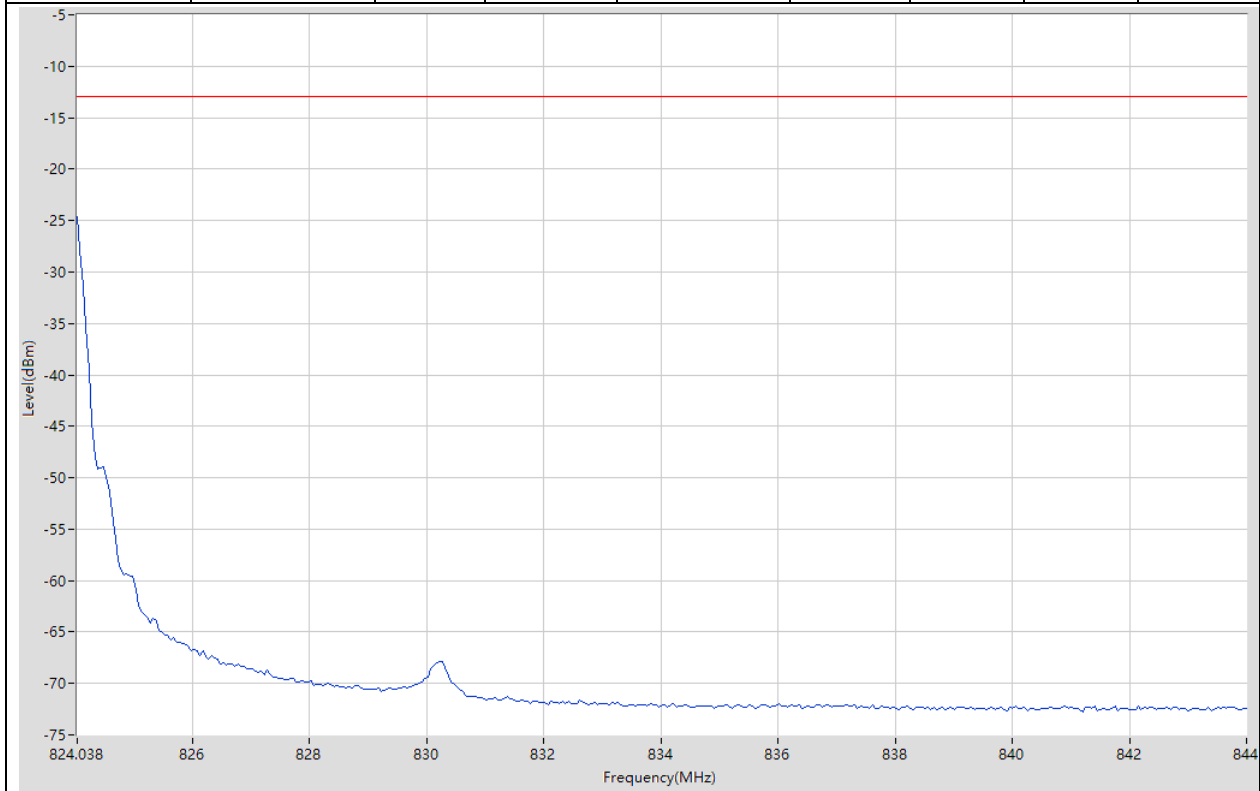

31. NR_n26(Part90)_SCS15_5M_H_Outer_Full(QPSK)

31.4. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 824.038 | -38.04 | -13 | Pass | 401 |

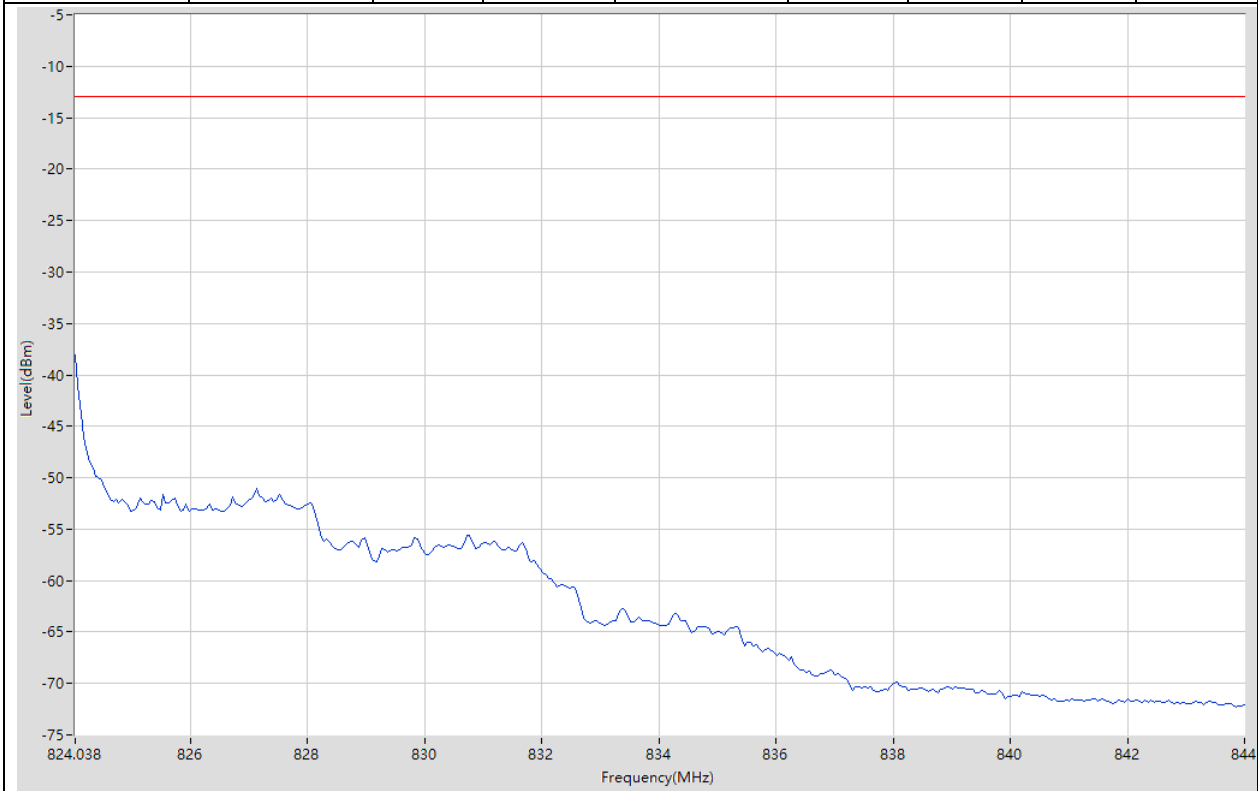

31. NR_n26(Part90)_SCS15_10M_L_Edge_1RB_Left(QPSK)

31.5. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -26.39 | -13 | Pass | 401 |

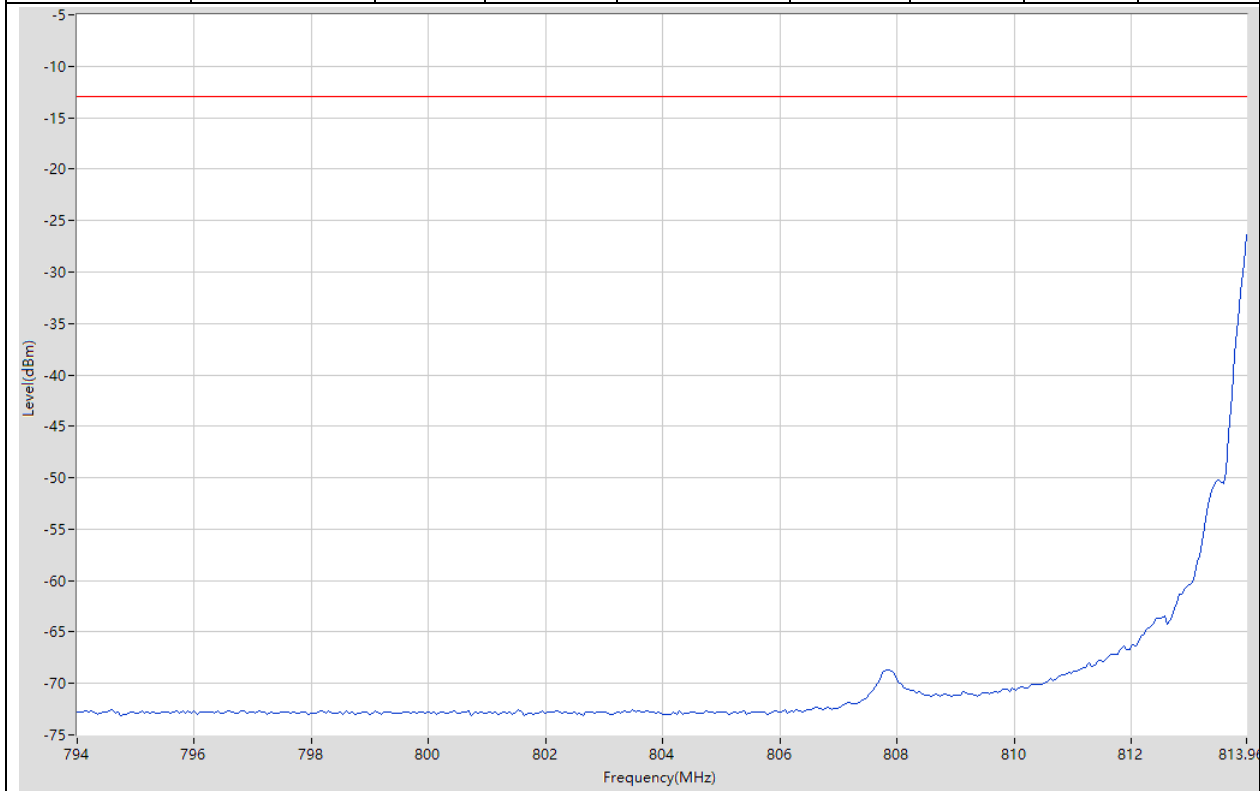

31. NR_n26(Part90)_SCS15_10M_L_Outer_Full(QPSK)

31.6. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -39.9 | -13 | Pass | 401 |

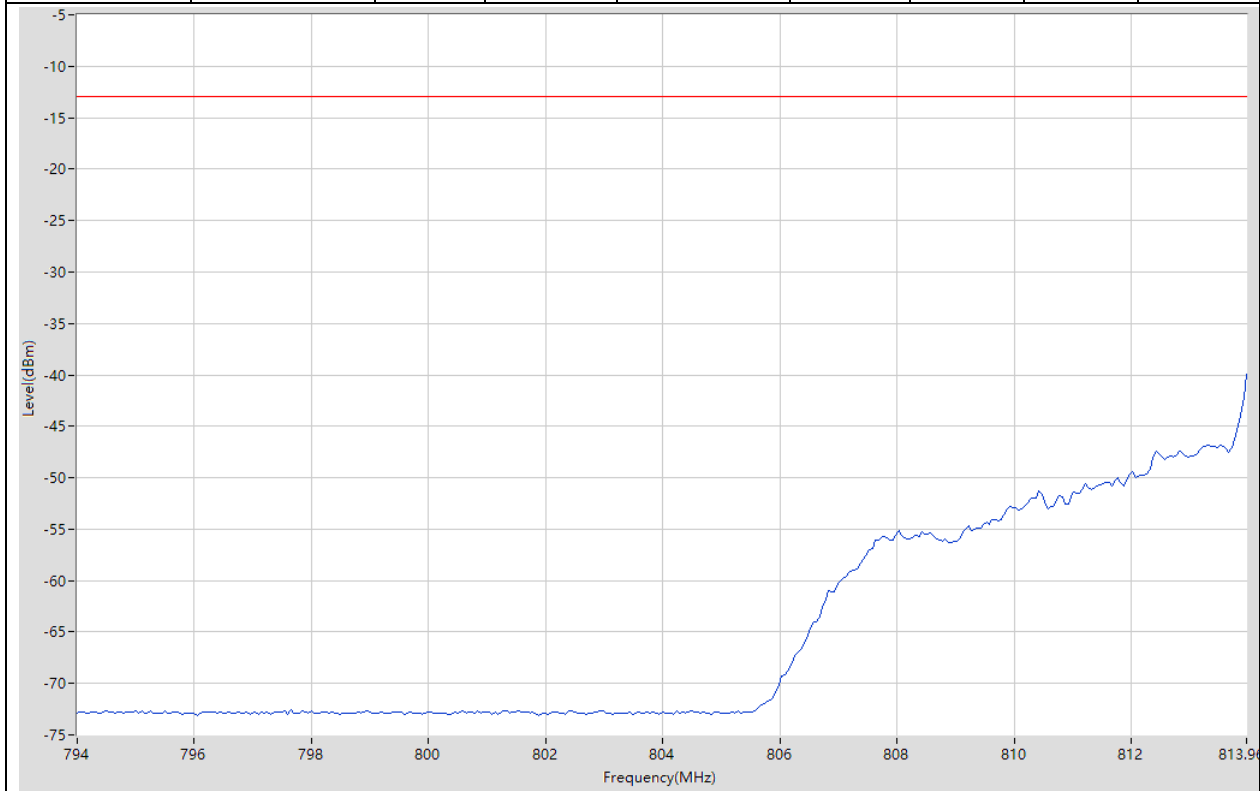

31. NR_n26(Part90)_SCS15_10M_H_Edge_1RB_Right(QPSK)

31.7. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 824.038 | -26.93 | -13 | Pass | 401 |

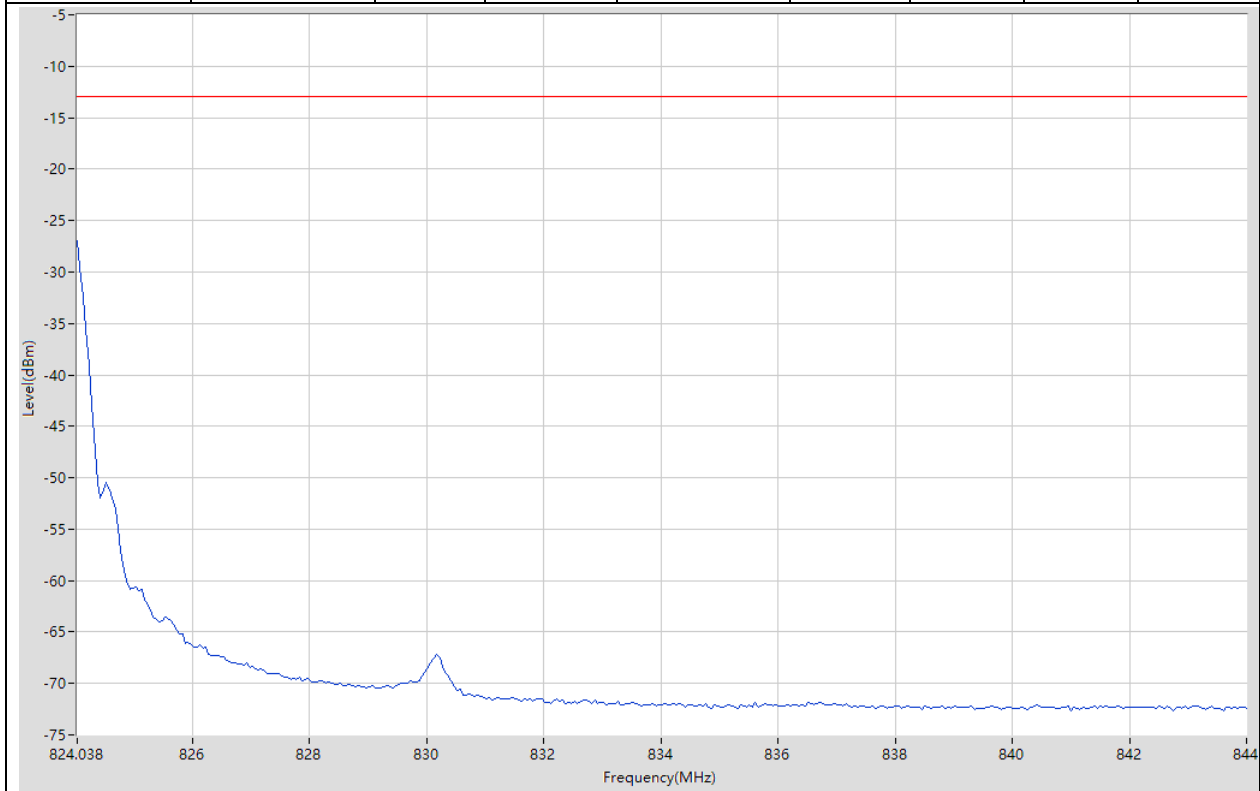

31. NR_n26(Part90)_SCS15_10M_H_Outer_Full(QPSK)

31.8. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 825.036 | -47.35 | -13 | Pass | 401 |

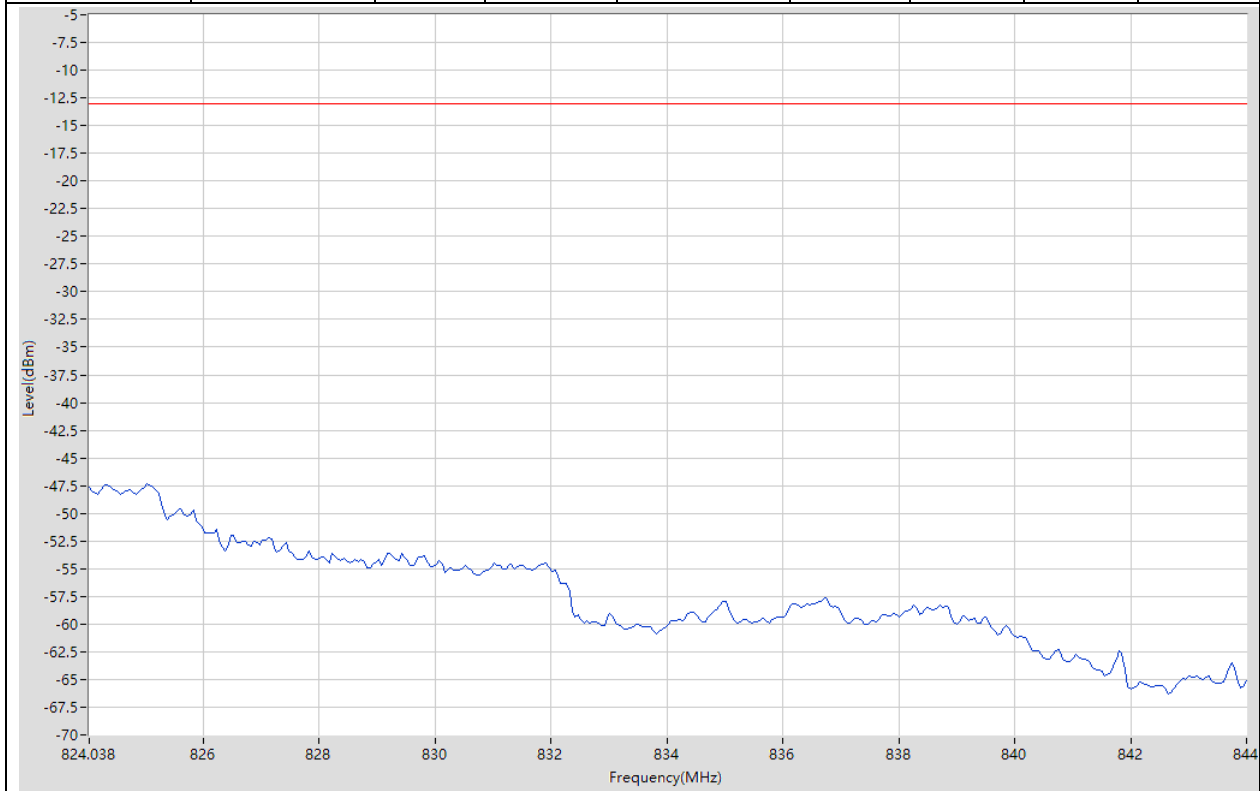

31. NR_n26(Part90)_SCS15_5M_L_Edge_1RB_Left(16QAM)

31.9. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -23.52 | -13 | Pass | 401 |

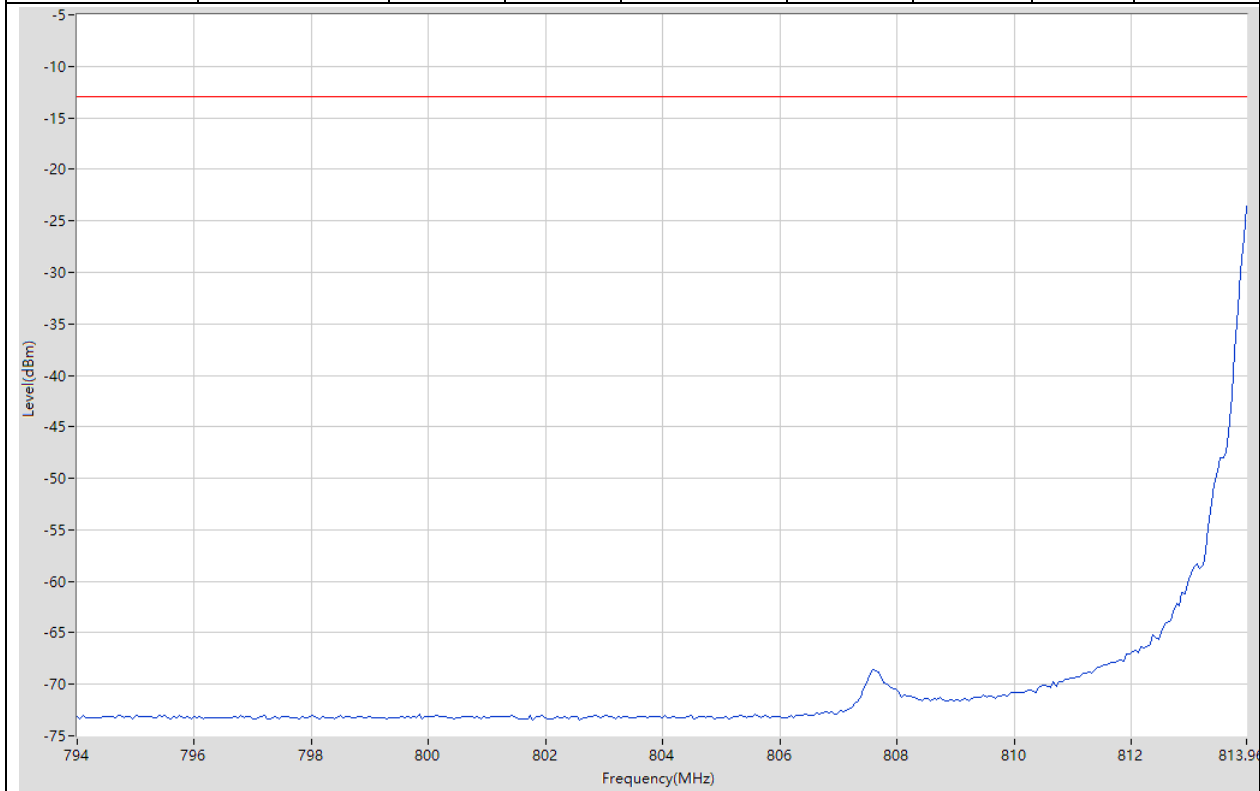

31. NR_n26(Part90)_SCS15_5M_L_Outer_Full(16QAM)

31.10. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -37.07 | -13 | Pass | 401 |

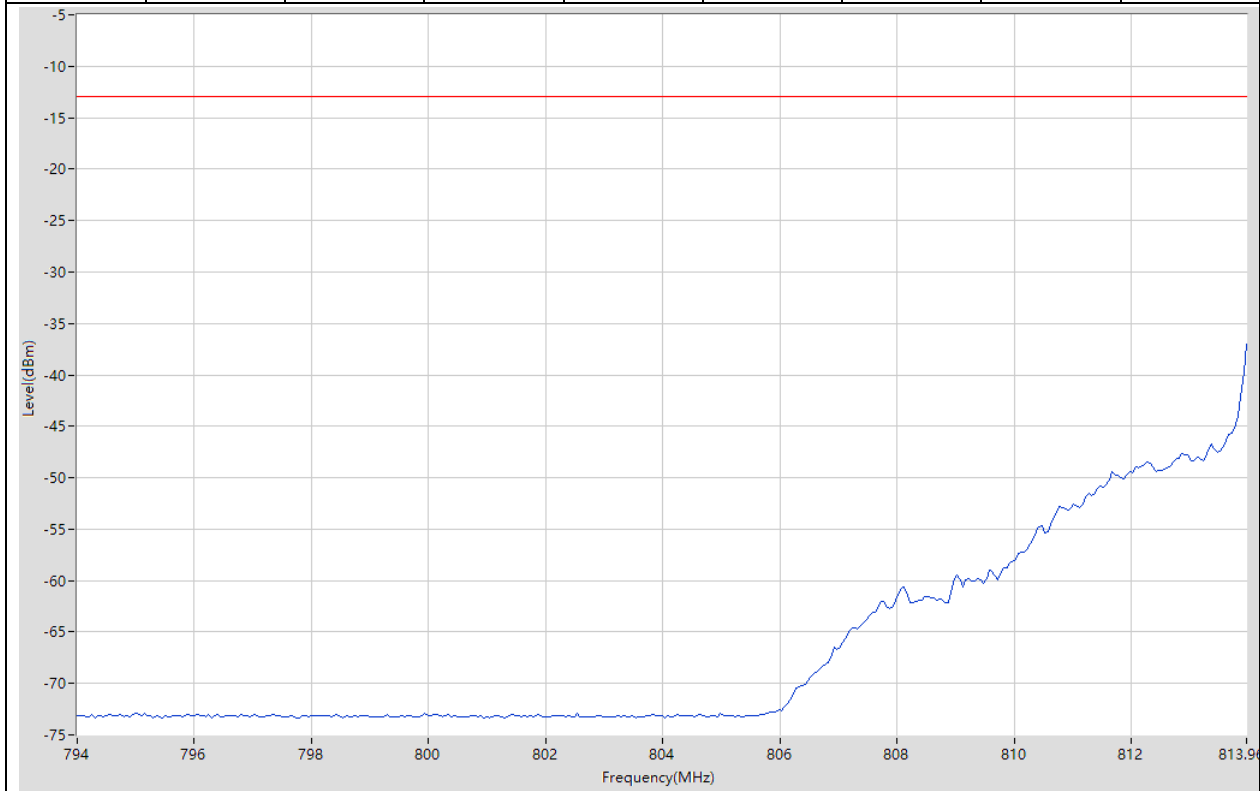

31. NR_n26(Part90)_SCS15_5M_H_Edge_1RB_Right(16QAM)

31.11. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 824.038 | -25.09 | -13 | Pass | 401 |

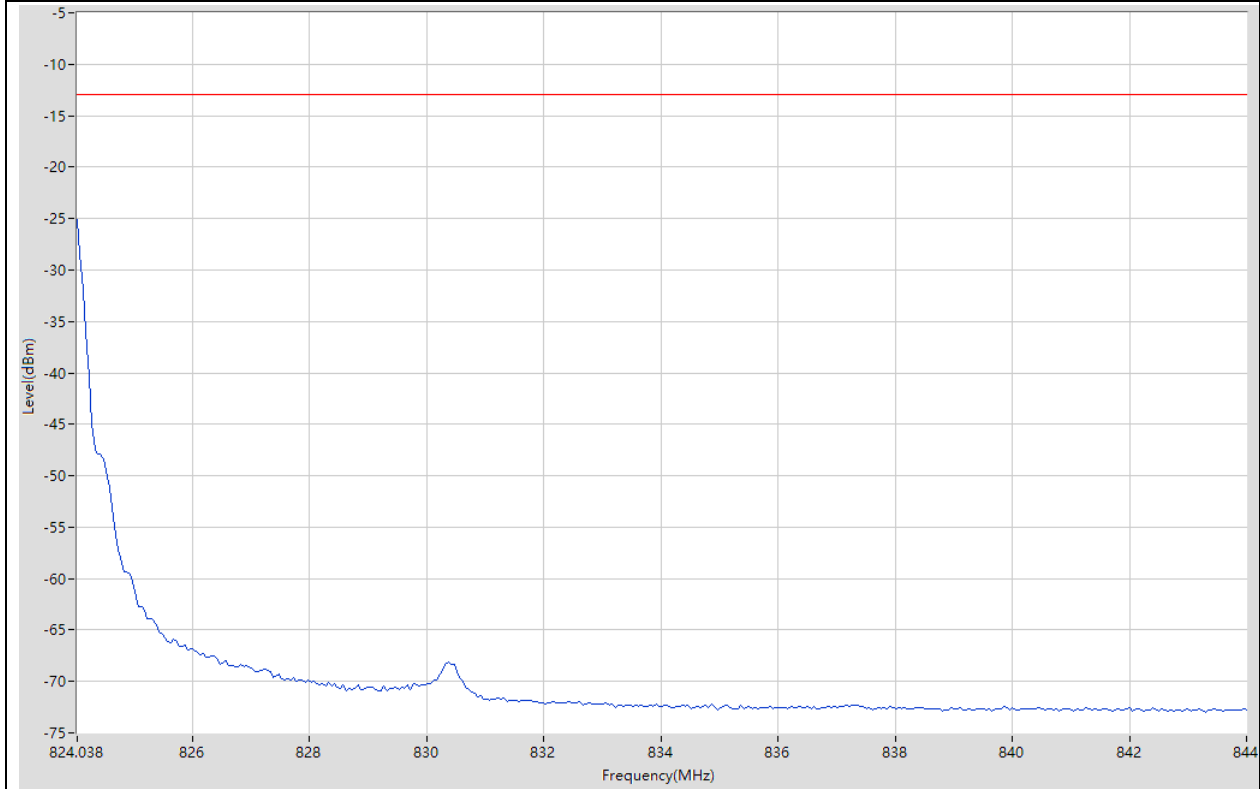

31. NR_n26(Part90)_SCS15_5M_H_Outer_Full(16QAM)

31.12. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 824.038 | -36.85 | -13 | Pass | 401 |

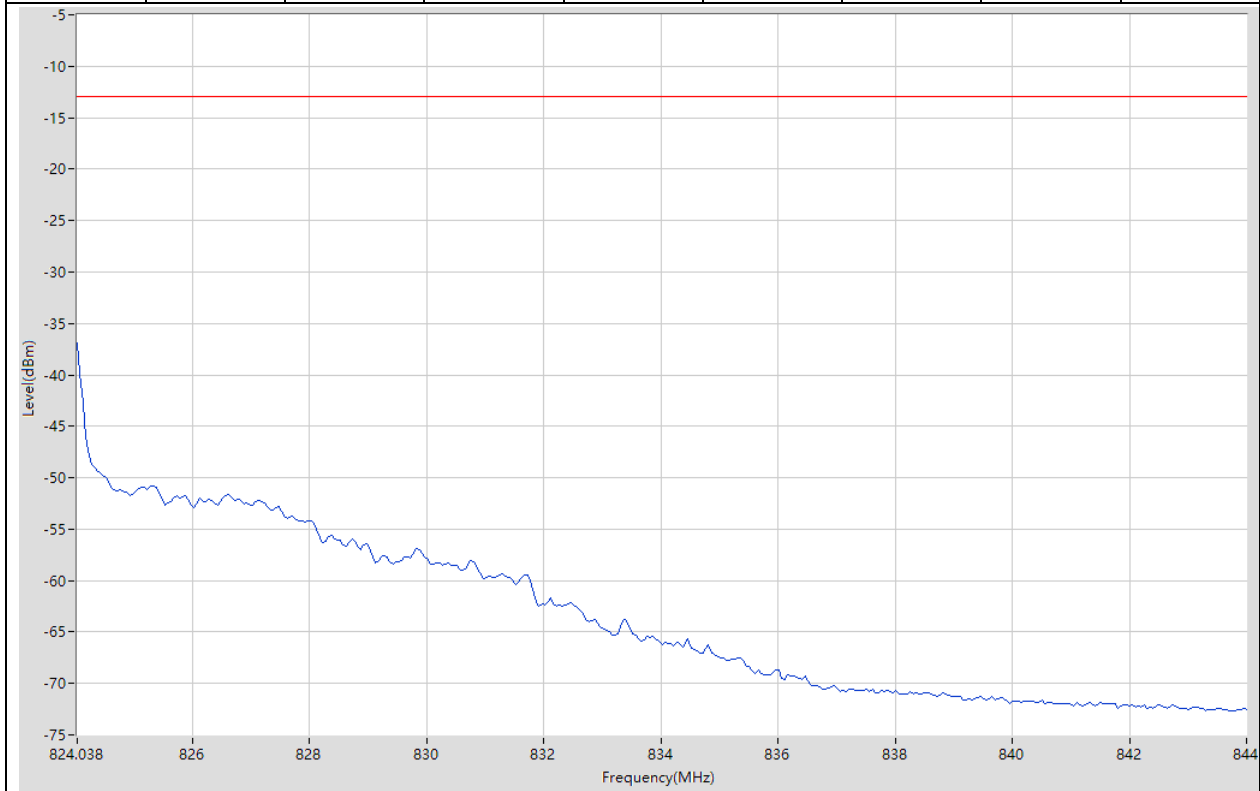

31. NR_n26(Part90)_SCS15_10M_L_Edge_1RB_Left(16QAM)

31.13. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -25.58 | -13 | Pass | 401 |

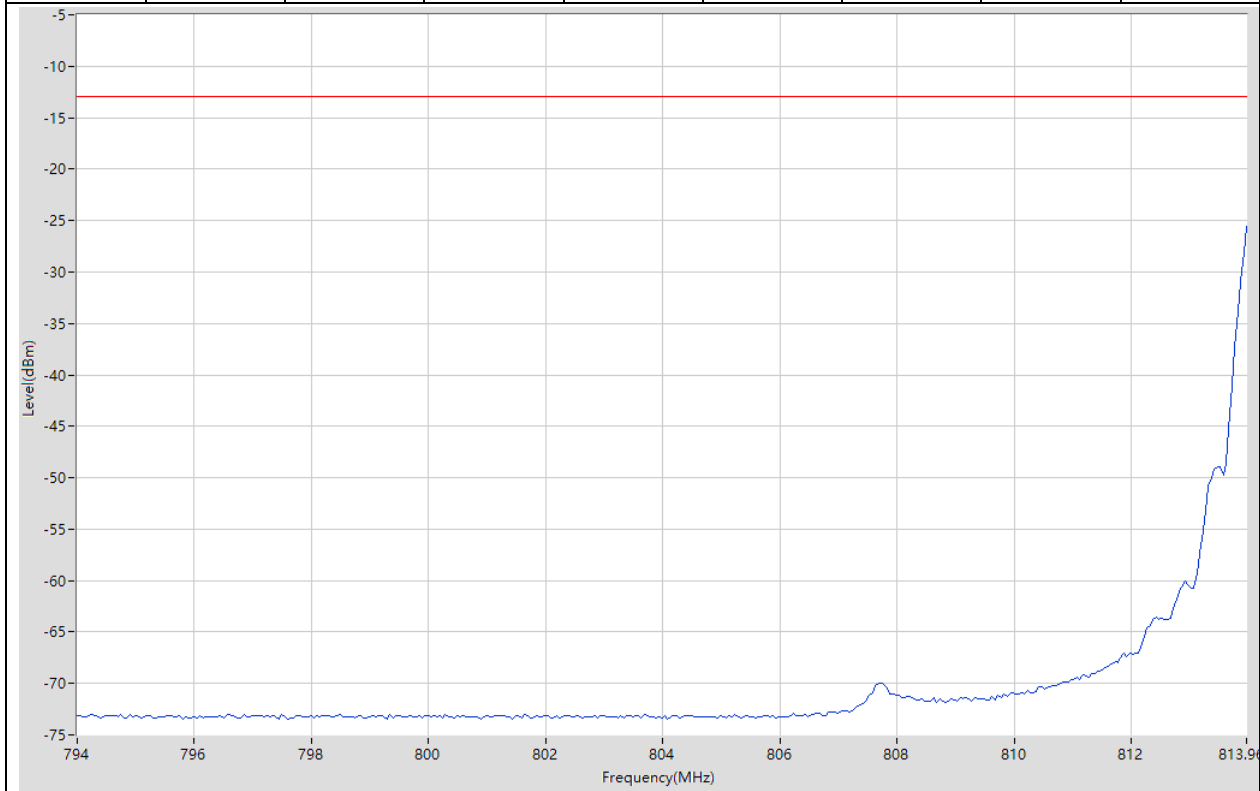

31. NR_n26(Part90)_SCS15_10M_L_Outer_Full(16QAM)

31.14. NR Band Edge_out-of-band for Lower(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 794 | 813.962 | 0.1 | RMS | 813.963 | -43.35 | -13 | Pass | 401 |

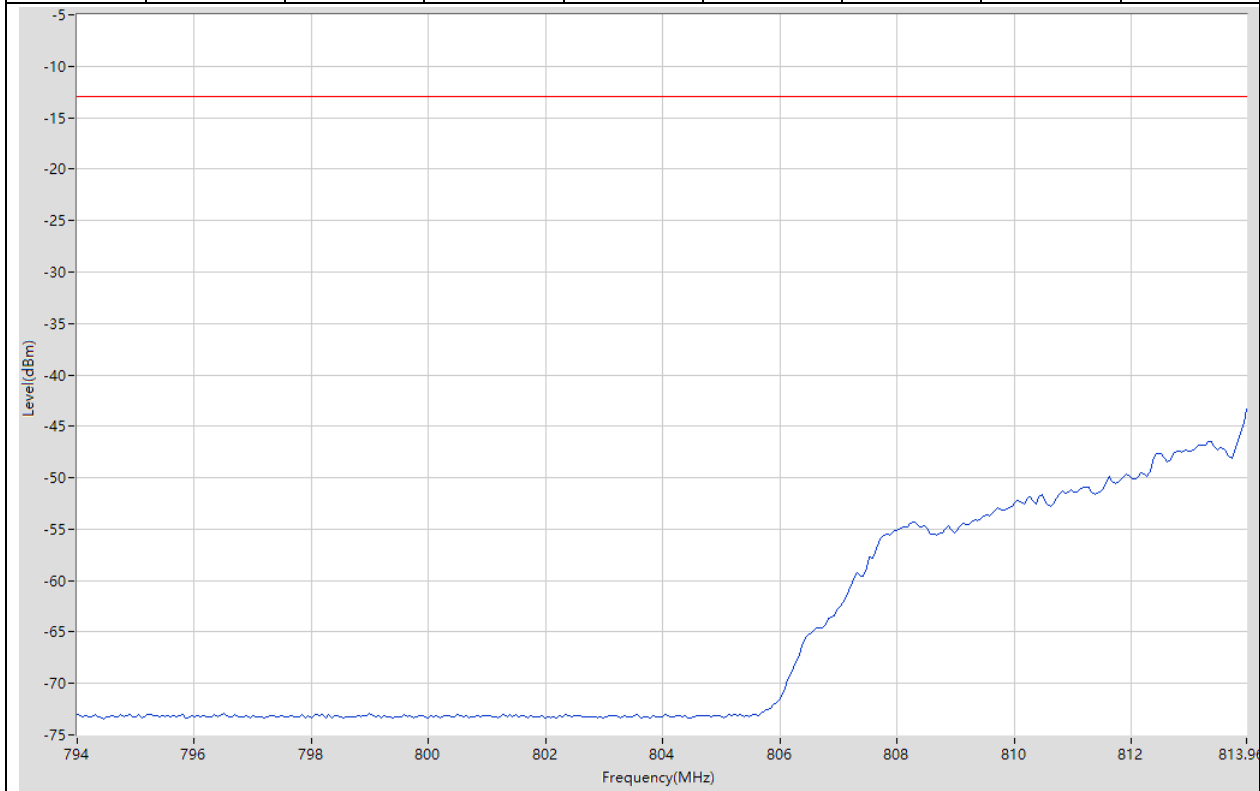

31. NR_n26(Part90)_SCS15_10M_H_Edge_1RB_Right(16QAM)

31.15. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 824.038 | -26.92 | -13 | Pass | 401 |

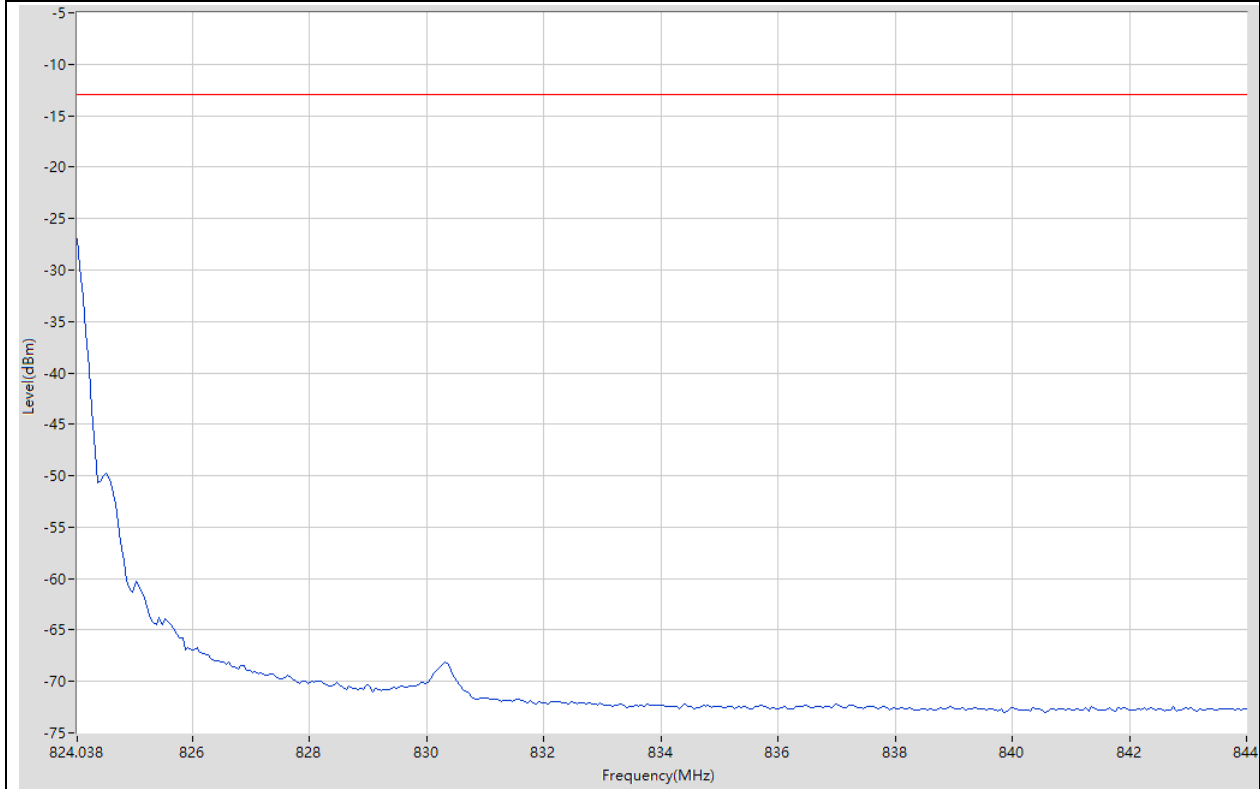

31. NR_n26(Part90)_SCS15_10M_H_Outer_Full(16QAM)

31.16. NR Band Edge_out-of-band for Upper(NTNV)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 824.038 | 844 | 0.1 | RMS | 824.187 | -47.51 | -13 | Pass | 401 |

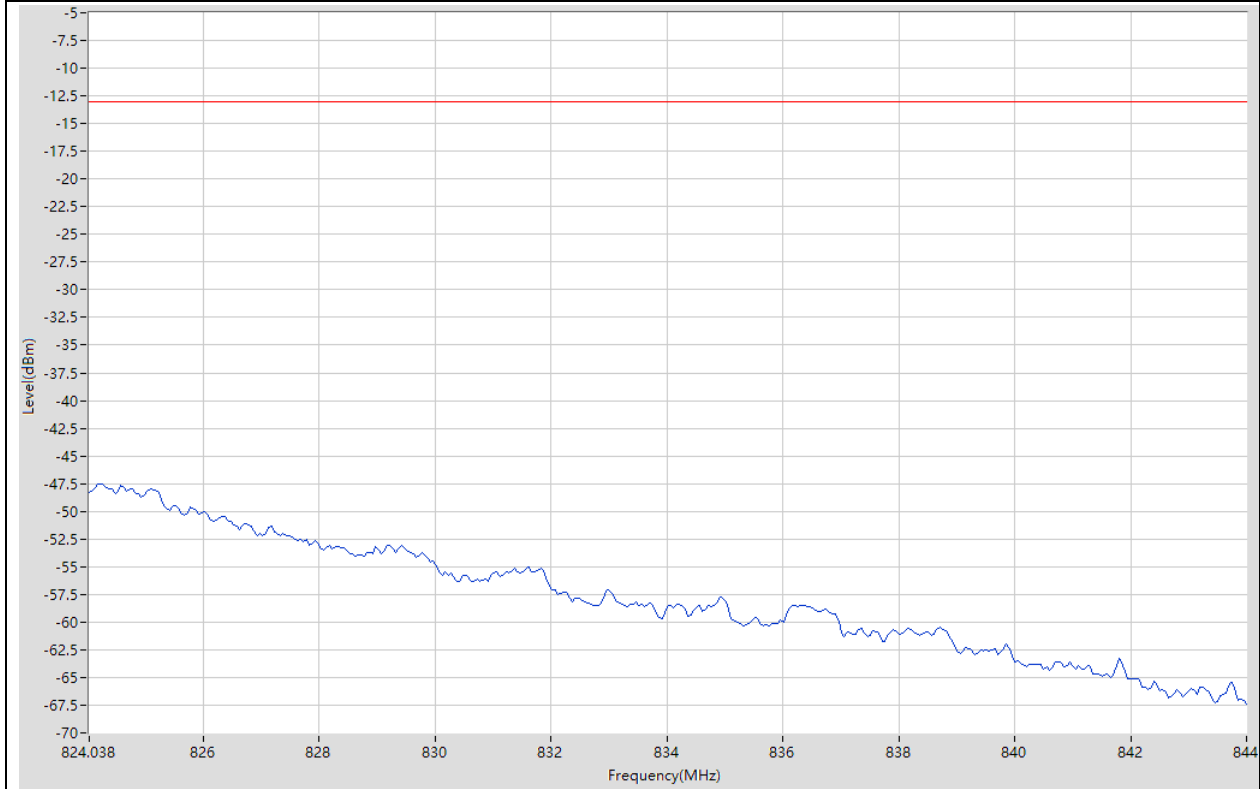

32. n38 30kHz_PC3


32.1. Band Edge for SA(NTNV)(Subtest:3, Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2525 | 2550 | 1 | RMS | 2549.313 | -49.91 | -25 | Pass | 401 |
| 2550 | 2565 | 1 | RMS | 2563.725 | -44.37 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2568.99 | -26.94 | -10 | Pass | 401 |
| 2569 | 2570 | 0.39 | RMS | 2570 | -15.23 | -10 | Pass | 401 |
| 2570 | 2610 | 1 | RMS | 2571 | 21.82 | 30 | Pass | 401 |

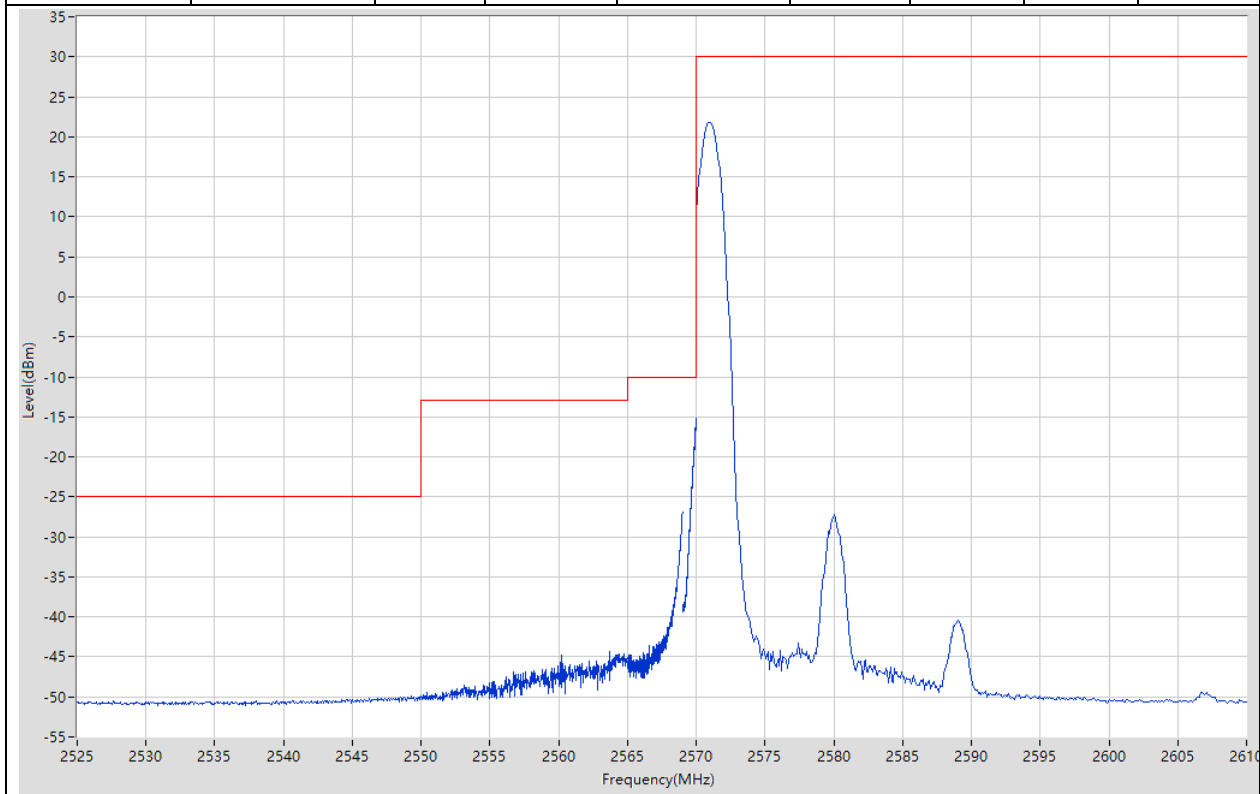


32.2. Band Edge for SA(NTNV)(Subtest:4, Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2525 | 2550 | 1 | RMS | 2527.438 | -48.41 | -25 | Pass | 401 |
| 2550 | 2565 | 1 | RMS | 2558.925 | -25.97 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2568.91 | -20.05 | -10 | Pass | 401 |
| 2569 | 2570 | 0.39 | RMS | 2569.55 | -24.33 | -10 | Pass | 401 |
| 2570 | 2610 | 1 | RMS | 2580 | 10.12 | 30 | Pass | 401 |

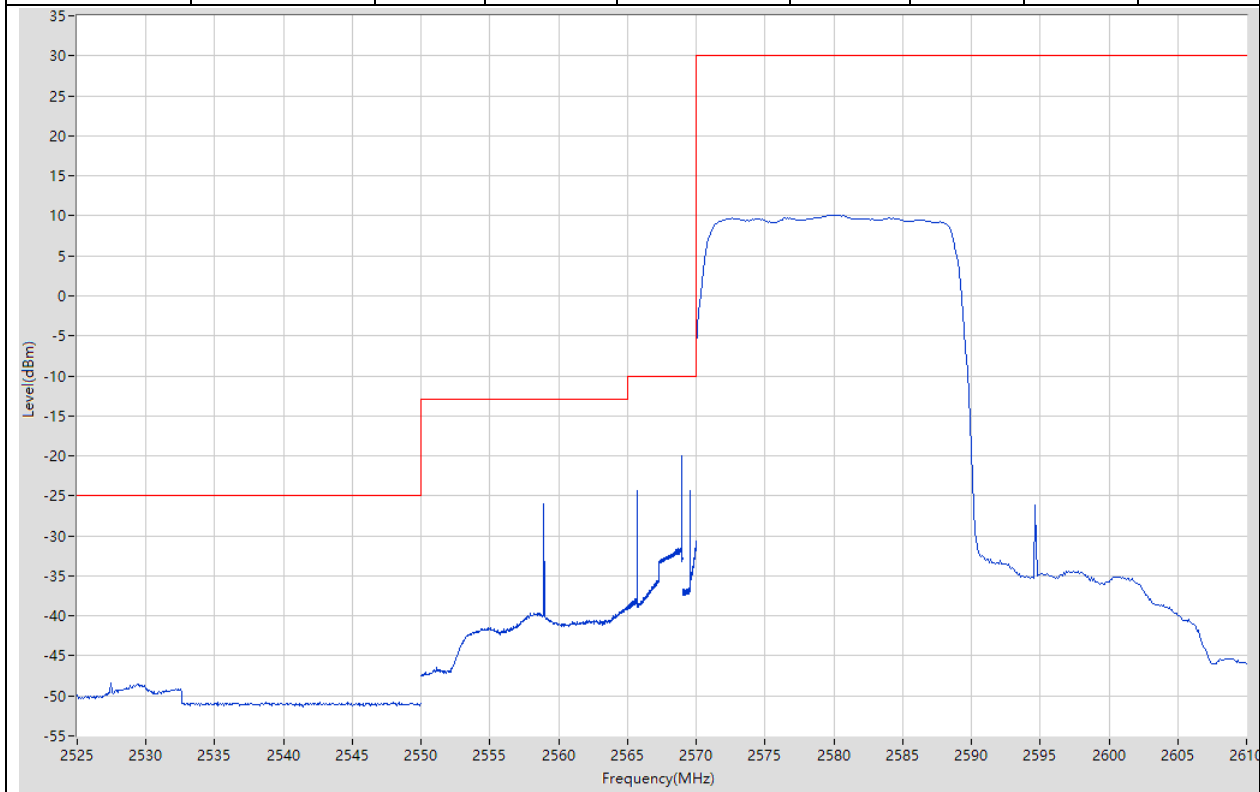


32.3. Band Edge for SA(NTNV)(Subtest:7, Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:50)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2580 | 2620 | 1 | RMS | 2619 | 21.81 | 30 | Pass | 401 |
| 2620 | 2621 | 0.4 | RMS | 2620 | -20.82 | -10 | Pass | 4 |
| 2621 | 2625 | 1 | RMS | 2621 | -27.78 | -10 | Pass | 401 |
| 2625 | 2640 | 1 | RMS | 2625.488 | -43.45 | -13 | Pass | 401 |
| 2640 | 2665 | 1 | RMS | 2640.063 | -49.49 | -25 | Pass | 401 |

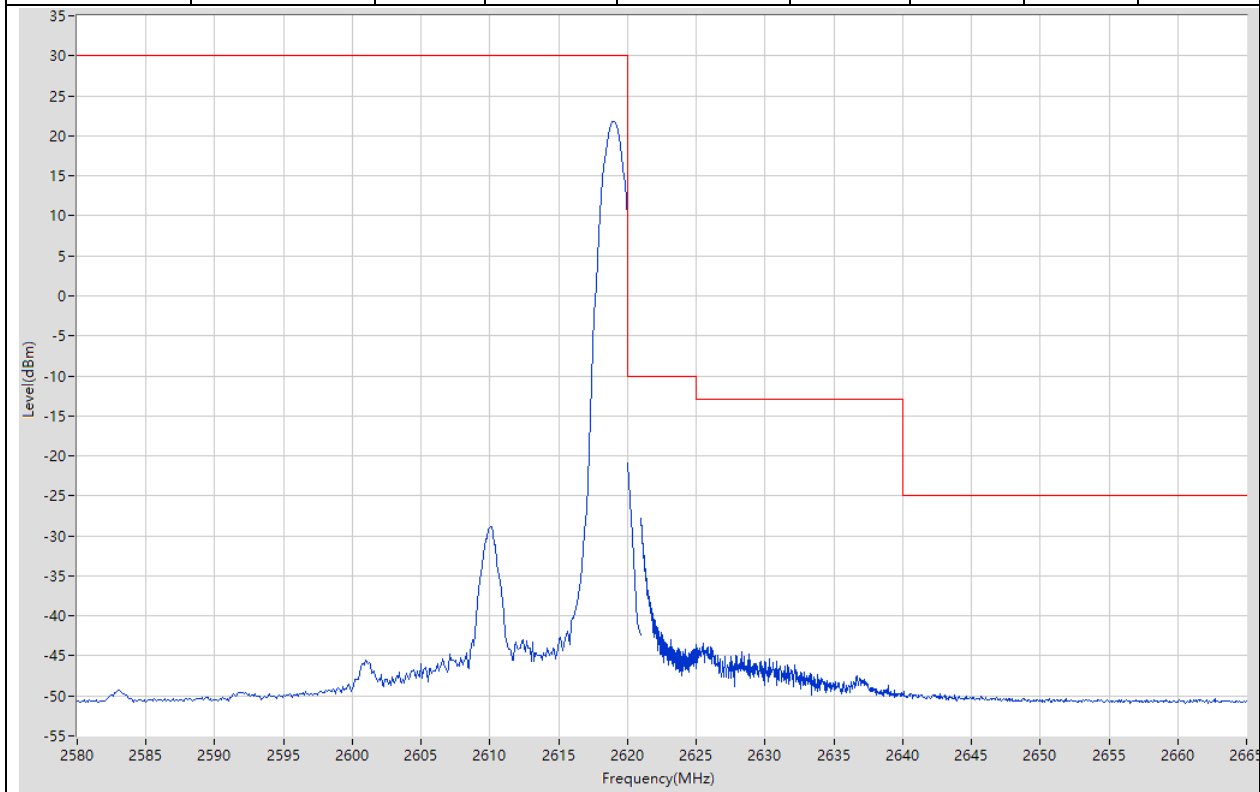


32.4. Band Edge for SA(NTNV)(Subtest:8, Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2580 | 2620 | 1 | RMS | 2612.2 | 10.5 | 30 | Pass | 401 |
| 2620 | 2621 | 0.4 | RMS | 2620 | -37.82 | -10 | Pass | 4 |
| 2621 | 2625 | 1 | RMS | 2623.11 | -23.3 | -10 | Pass | 401 |
| 2625 | 2640 | 1 | RMS | 2626.388 | -24.93 | -13 | Pass | 401 |
| 2640 | 2665 | 1 | RMS | 2651.625 | -42.64 | -25 | Pass | 401 |

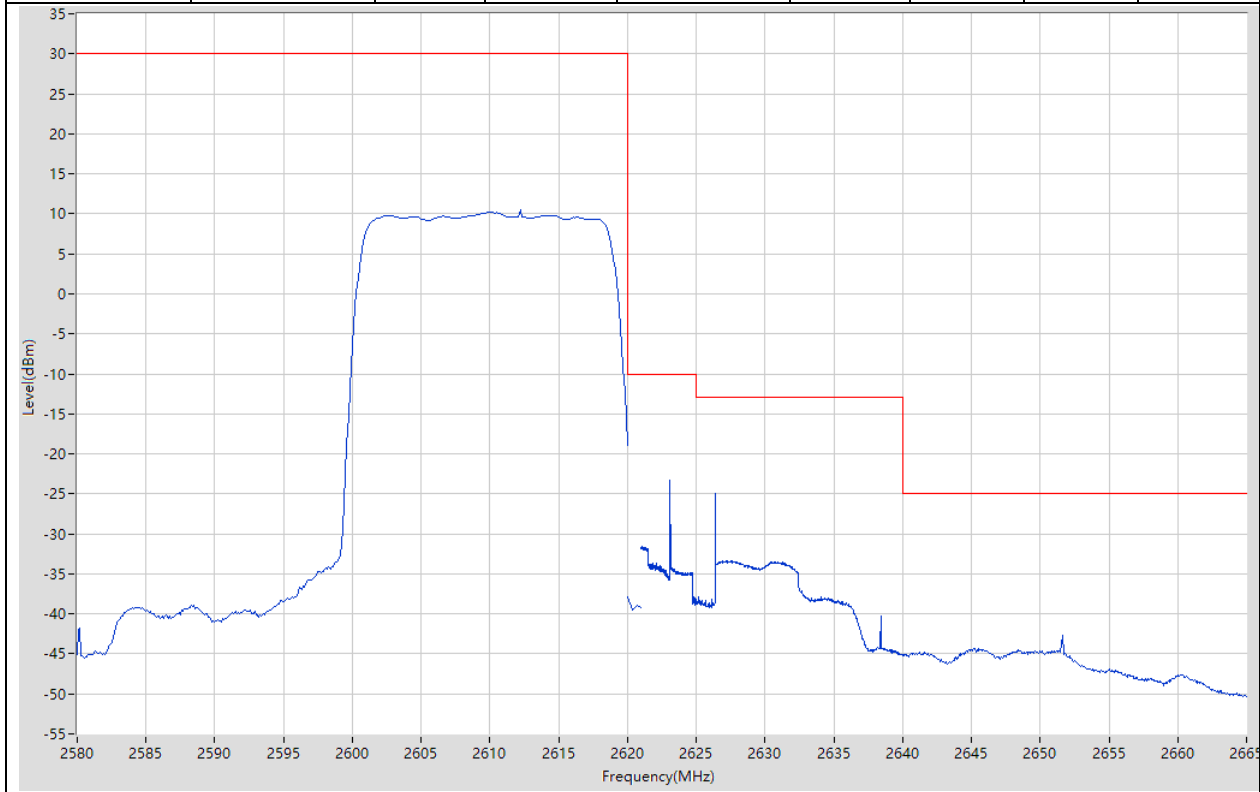


32.5. Band Edge for SA(NTNV)(Subtest:3, Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2525 | 2550 | 1 | RMS | 2548.438 | -50.08 | -25 | Pass | 401 |
| 2550 | 2565 | 1 | RMS | 2564.325 | -45.08 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2568.99 | -29.1 | -10 | Pass | 401 |
| 2569 | 2570 | 0.39 | RMS | 2569.998 | -17.41 | -10 | Pass | 401 |
| 2570 | 2610 | 1 | RMS | 2571 | 20.72 | 30 | Pass | 401 |

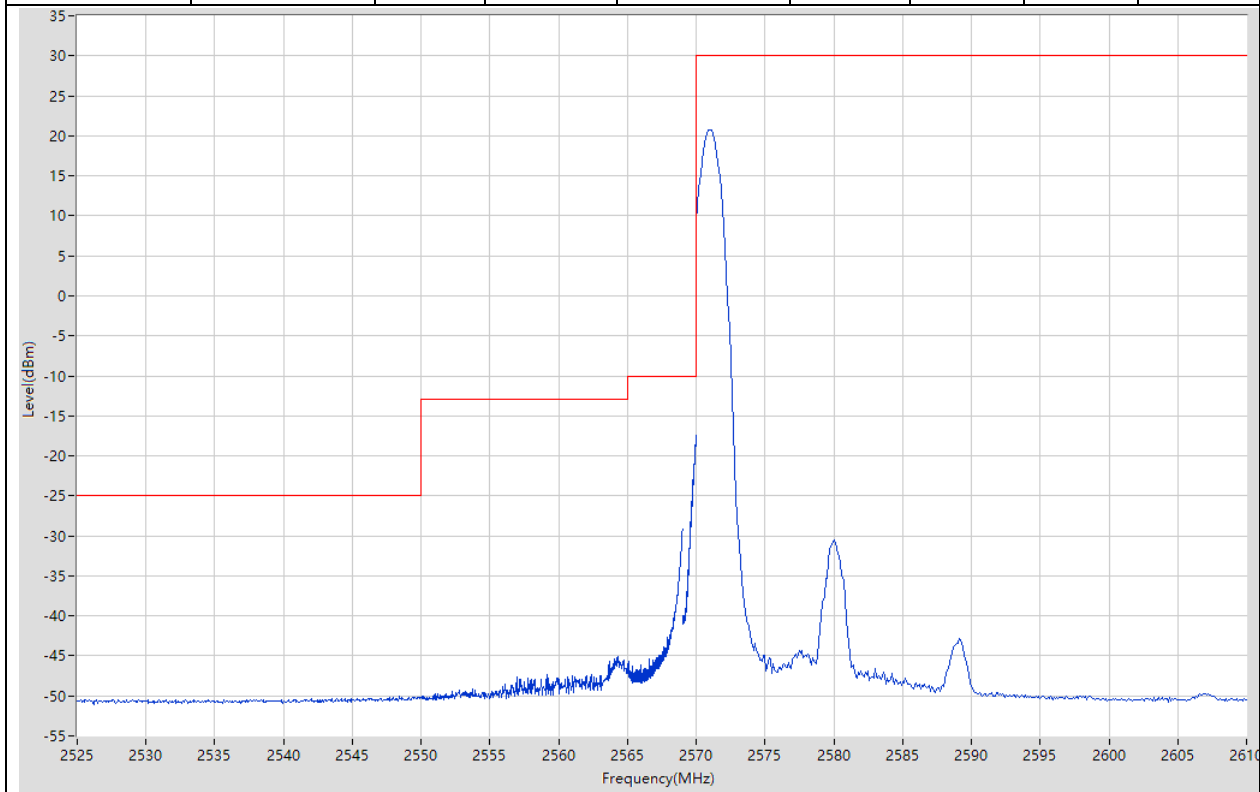


32.6. Band Edge for SA(NTNV)(Subtest:4, Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2525 | 2550 | 1 | RMS | 2543.813 | -45.41 | -25 | Pass | 401 |
| 2550 | 2565 | 1 | RMS | 2554.875 | -35.79 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2567.82 | -23.18 | -10 | Pass | 401 |
| 2569 | 2570 | 0.39 | RMS | 2569.285 | -26.98 | -10 | Pass | 401 |
| 2570 | 2610 | 1 | RMS | 2581.5 | 8.9 | 30 | Pass | 401 |

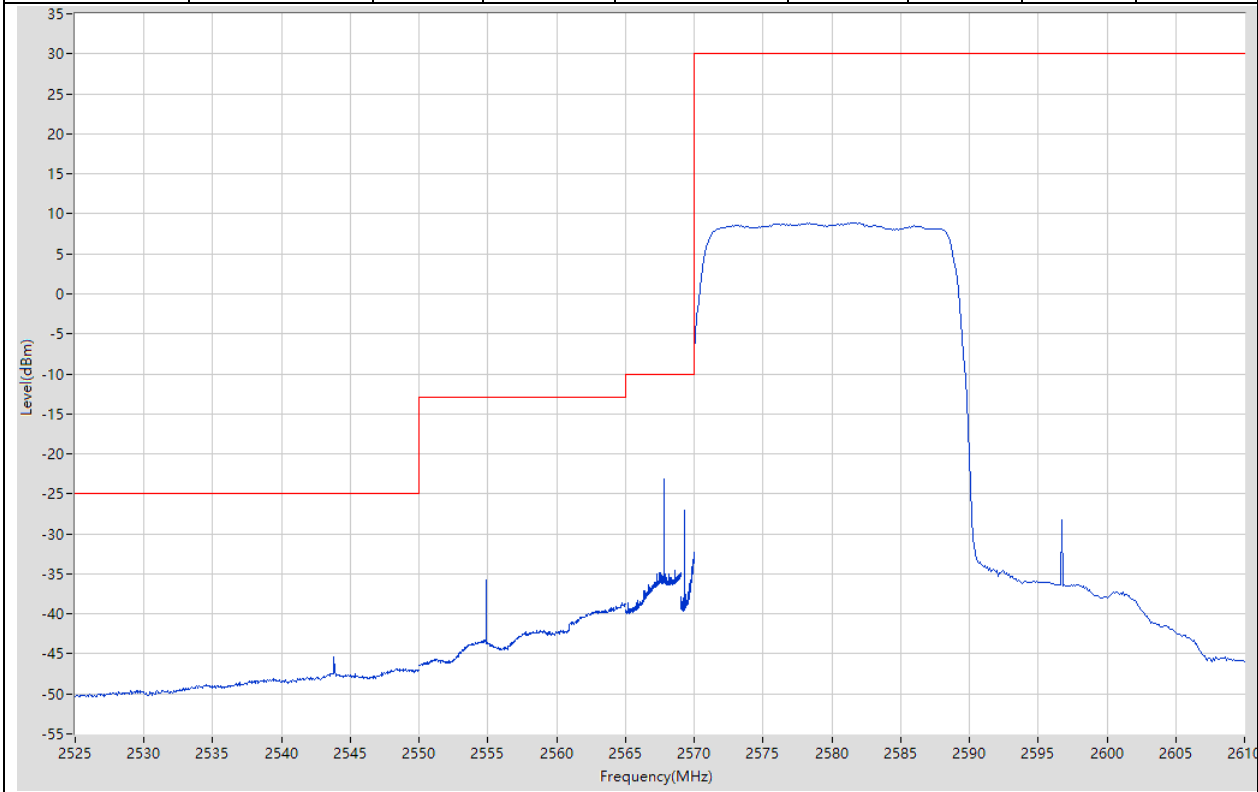


32.7. Band Edge for SA(NTNV)(Subtest:7, Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:50)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2580 | 2620 | 1 | RMS | 2618.9 | 20.73 | 30 | Pass | 401 |
| 2620 | 2621 | 0.4 | RMS | 2620 | -21.13 | -10 | Pass | 4 |
| 2621 | 2625 | 1 | RMS | 2621 | -27.9 | -10 | Pass | 401 |
| 2625 | 2640 | 1 | RMS | 2625.413 | -43.94 | -13 | Pass | 401 |
| 2640 | 2665 | 1 | RMS | 2640 | -49.72 | -25 | Pass | 401 |

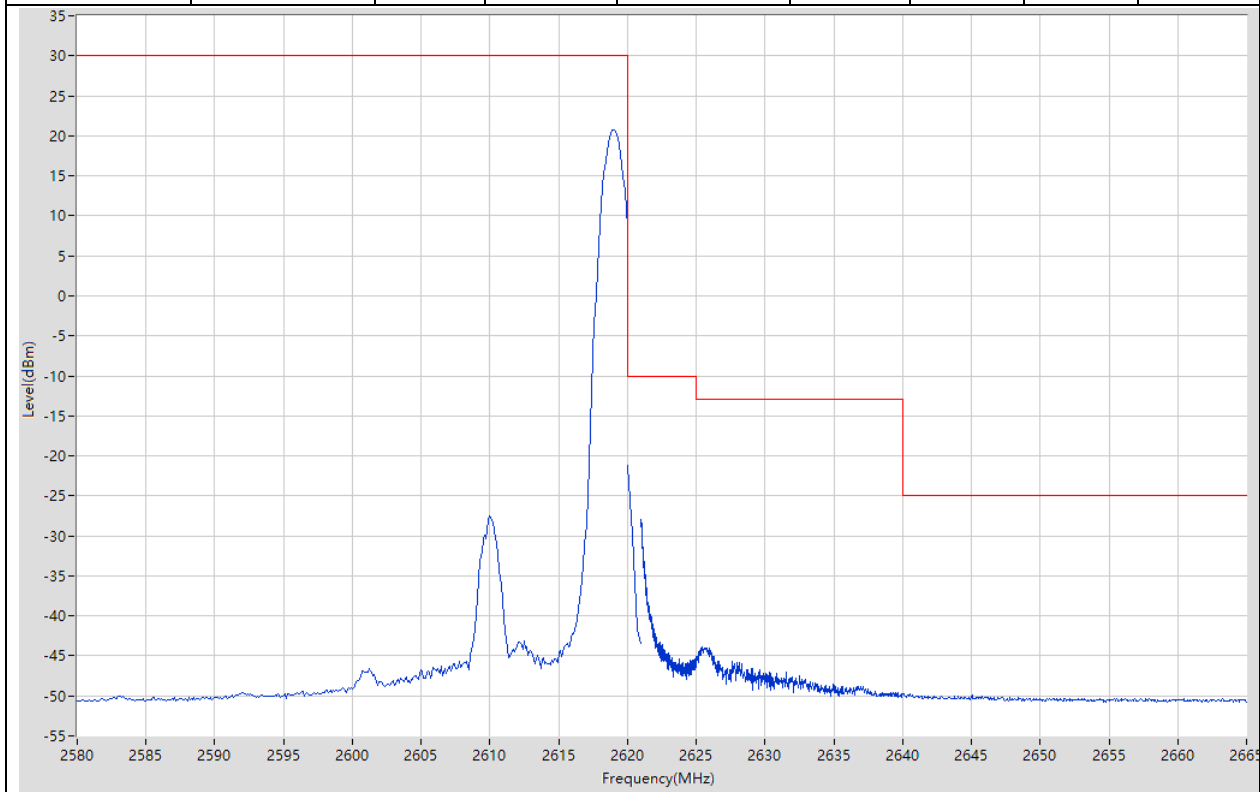


32.8. Band Edge for SA(NTNV)(Subtest:8, Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2580 | 2620 | 1 | RMS | 2611.3 | 8.94 | 30 | Pass | 401 |
| 2620 | 2621 | 0.4 | RMS | 2621 | -39.57 | -10 | Pass | 4 |
| 2621 | 2625 | 1 | RMS | 2621.93 | -23.91 | -10 | Pass | 401 |
| 2625 | 2640 | 1 | RMS | 2633.963 | -34.77 | -13 | Pass | 401 |
| 2640 | 2665 | 1 | RMS | 2644.563 | -43.45 | -25 | Pass | 401 |

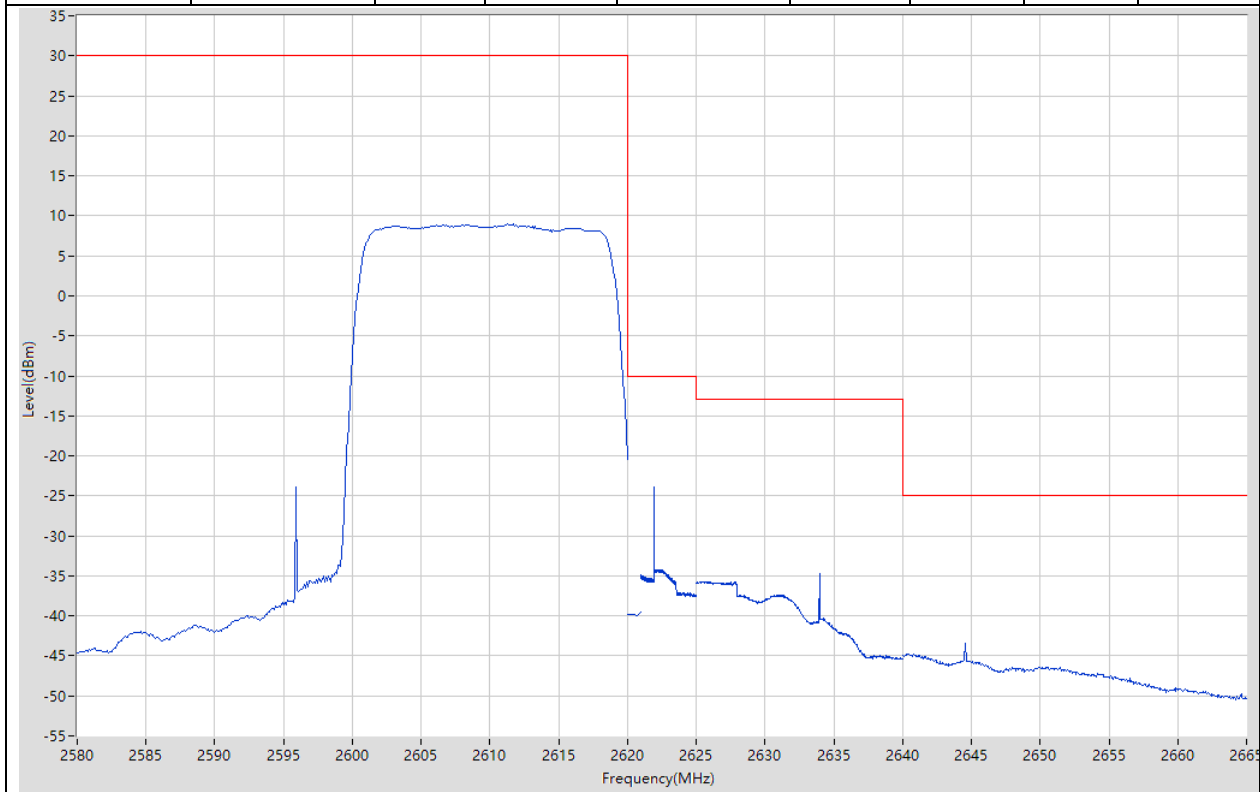


32.9. Band Edge for SA(NTNV)(Subtest:3, Channel:517000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2465 | 2540 | 1 | RMS | 2539.813 | -50.83 | -25 | Pass | 401 |
| 2540 | 2565 | 1 | RMS | 2564.813 | -45.86 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2569 | -37.9 | -10 | Pass | 5 |
| 2569 | 2570 | 0.62 | RMS | 2570 | -13.55 | -10 | Pass | 401 |
| 2570 | 2670 | 1 | RMS | 2571.25 | 21.28 | 30 | Pass | 401 |

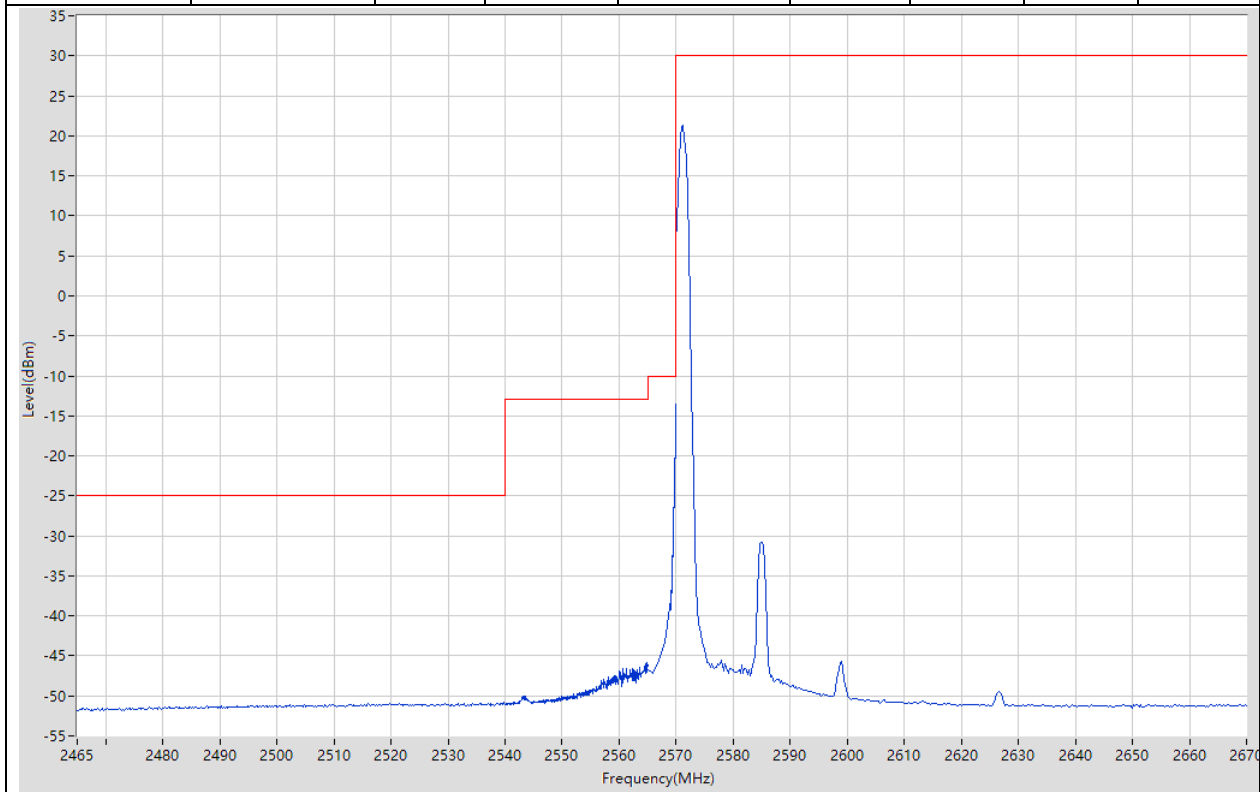


32.10. Band Edge for SA(NTNV)(Subtest:4, Channel:517000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:75, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2465 | 2540 | 1 | RMS | 2540 | -40.95 | -25 | Pass | 401 |
| 2540 | 2565 | 1 | RMS | 2565 | -26.01 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2568 | -23.5 | -10 | Pass | 5 |
| 2569 | 2570 | 0.62 | RMS | 2569.98 | -24.49 | -10 | Pass | 401 |
| 2570 | 2670 | 1 | RMS | 2577.75 | 3.66 | 30 | Pass | 401 |

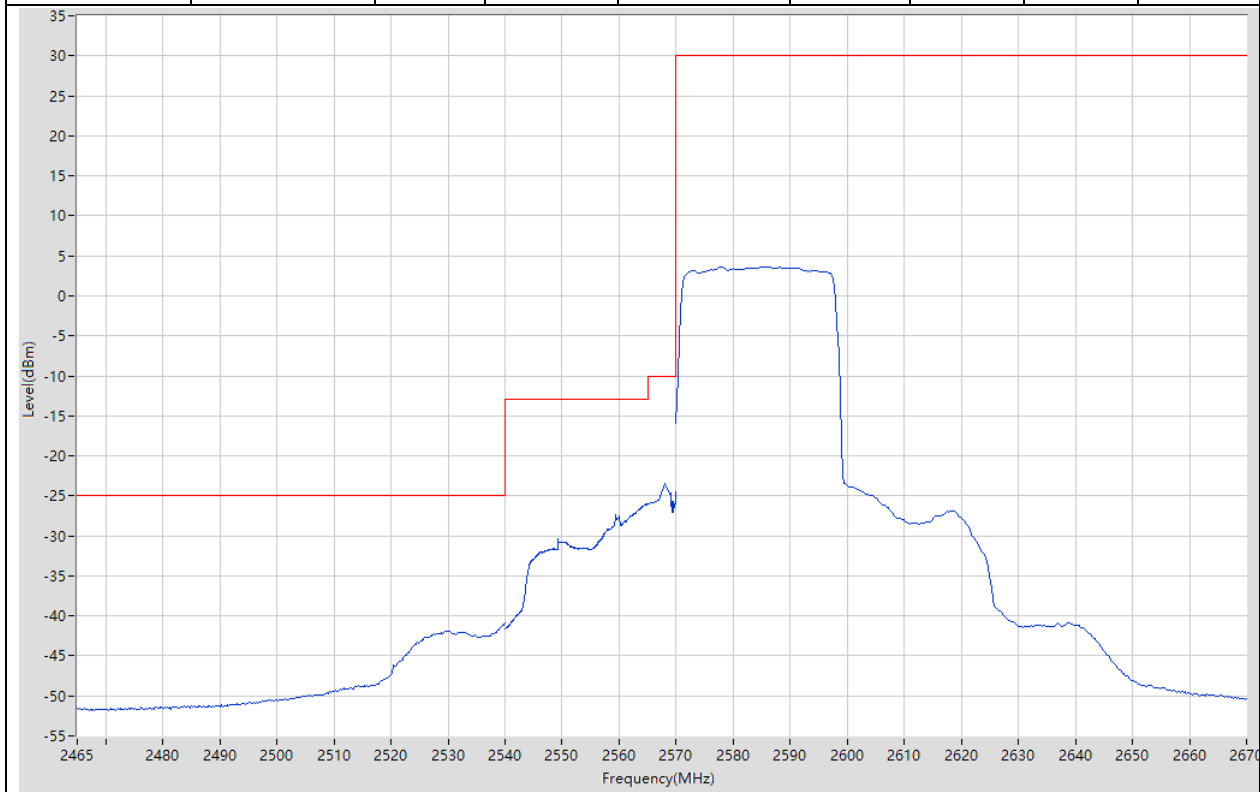


32.11. Band Edge for SA(NTNV)(Subtest:7, Channel:521000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:77)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2520 | 2620 | 1 | RMS | 2618.75 | 20.6 | 30 | Pass | 401 |
| 2620 | 2621 | 0.6 | RMS | 2620 | -21.55 | -10 | Pass | 3 |
| 2621 | 2625 | 1 | RMS | 2621 | -33.68 | -10 | Pass | 401 |
| 2625 | 2650 | 1 | RMS | 2625.438 | -46.37 | -13 | Pass | 401 |
| 2650 | 2725 | 1 | RMS | 2719 | -50.83 | -25 | Pass | 401 |

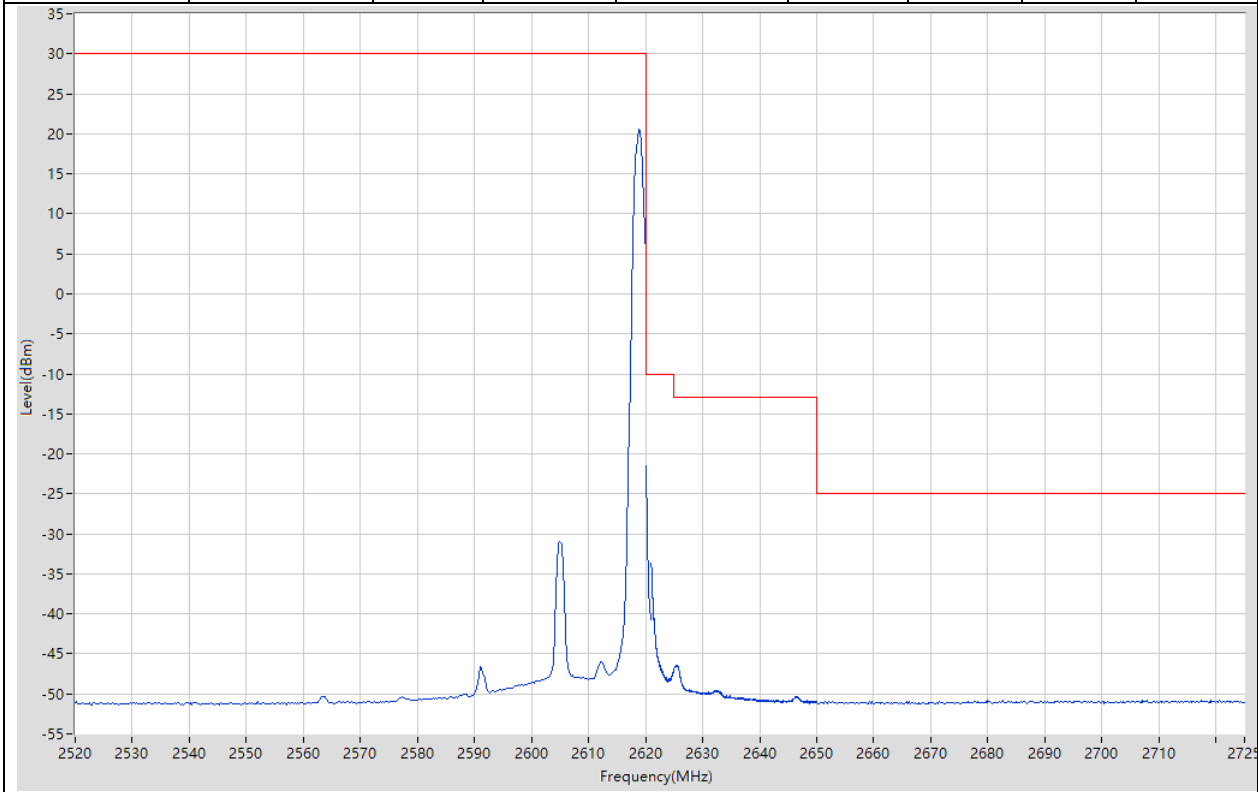


32.12. Band Edge for SA(NTNV)(Subtest:8, Channel:521000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:75, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2520 | 2620 | 1 | RMS | 2598.5 | 7.34 | 30 | Pass | 401 |
| 2620 | 2621 | 0.6 | RMS | 2620 | -19.68 | -10 | Pass | 3 |
| 2621 | 2625 | 1 | RMS | 2621.68 | -16.87 | -10 | Pass | 401 |
| 2625 | 2650 | 1 | RMS | 2625 | -18.16 | -13 | Pass | 401 |
| 2650 | 2725 | 1 | RMS | 2650.188 | -36.59 | -25 | Pass | 401 |

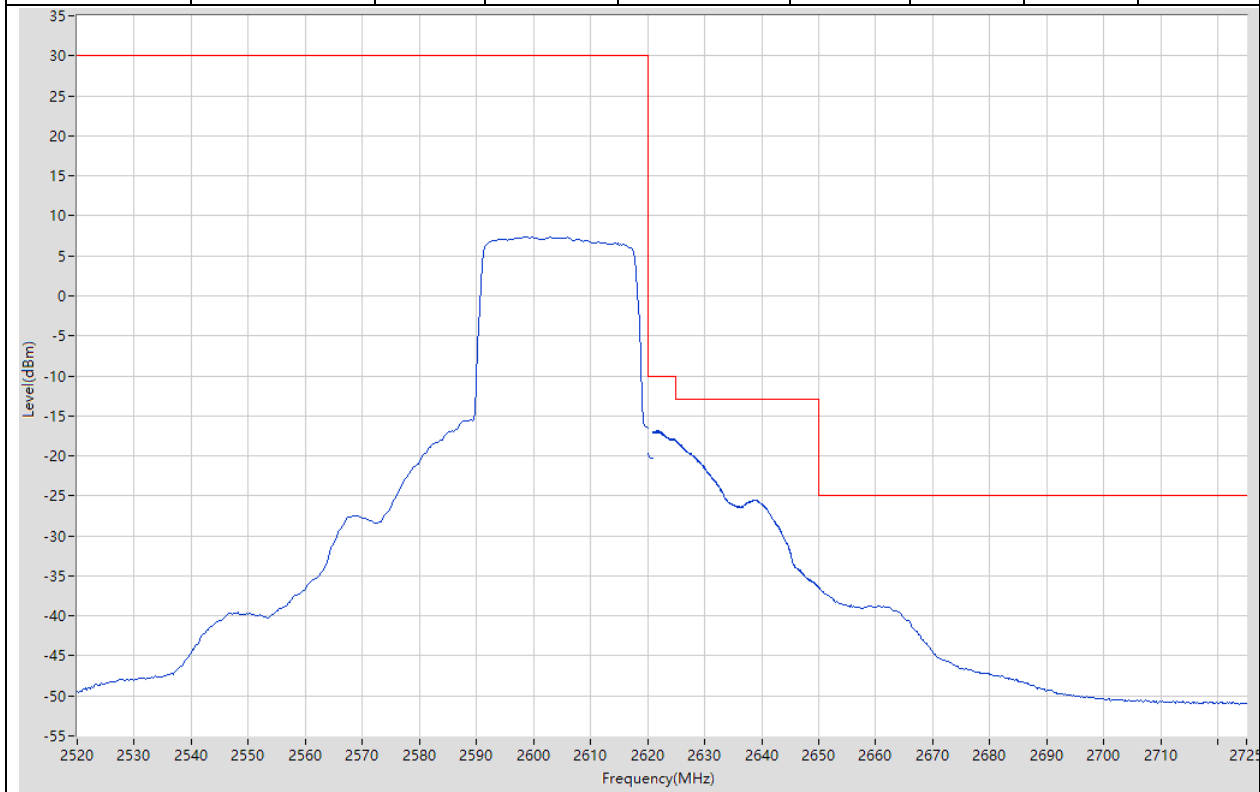


32.13. Band Edge for SA(NTNV)(Subtest:3, Channel:517000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2465 | 2540 | 1 | RMS | 2539.438 | -50.88 | -25 | Pass | 401 |
| 2540 | 2565 | 1 | RMS | 2564.313 | -44.88 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2569 | -38.21 | -10 | Pass | 5 |
| 2569 | 2570 | 0.62 | RMS | 2570 | -13.33 | -10 | Pass | 401 |
| 2570 | 2670 | 1 | RMS | 2571.25 | 20.9 | 30 | Pass | 401 |

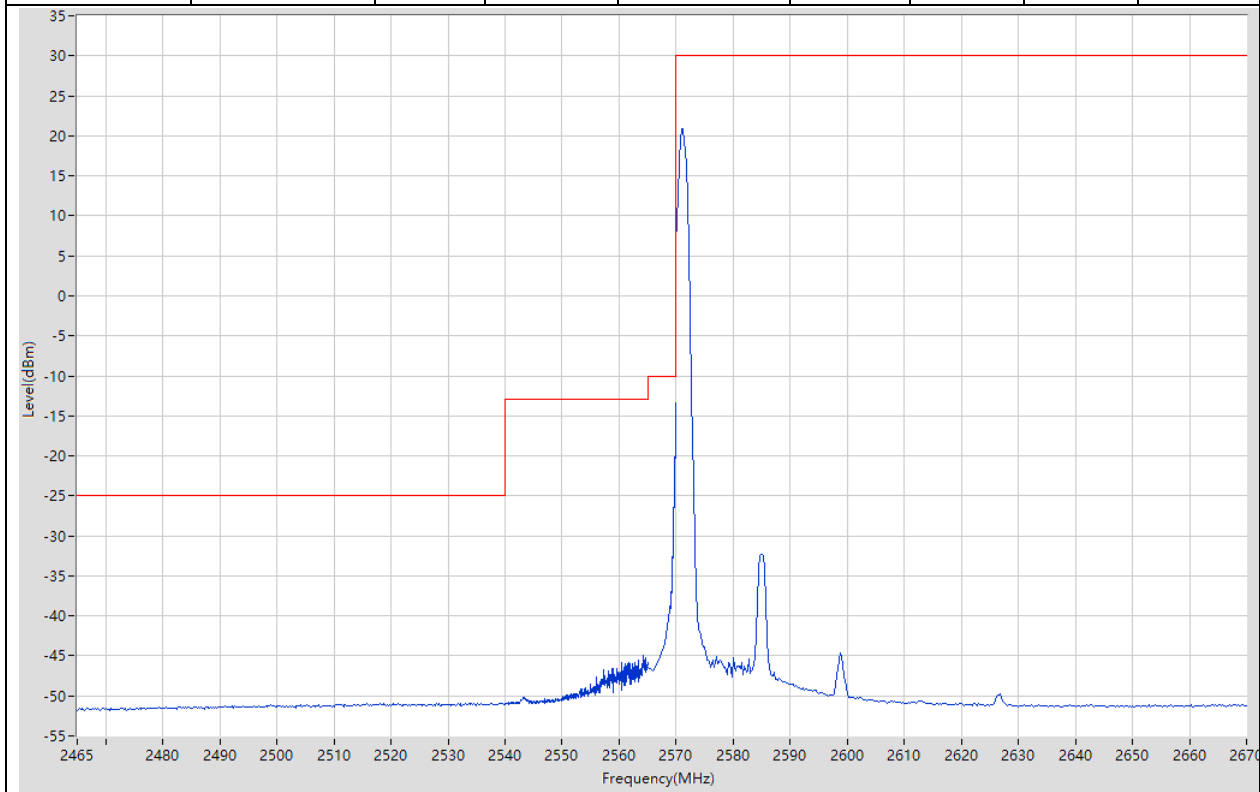


32.14. Band Edge for SA(NTNV)(Subtest:4, Channel:517000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:75, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2465 | 2540 | 1 | RMS | 2540 | -40.13 | -25 | Pass | 401 |
| 2540 | 2565 | 1 | RMS | 2565 | -24.51 | -13 | Pass | 401 |
| 2565 | 2569 | 1 | RMS | 2569 | -23.81 | -10 | Pass | 5 |
| 2569 | 2570 | 0.62 | RMS | 2569.995 | -24.56 | -10 | Pass | 401 |
| 2570 | 2670 | 1 | RMS | 2588.25 | 2.44 | 30 | Pass | 401 |

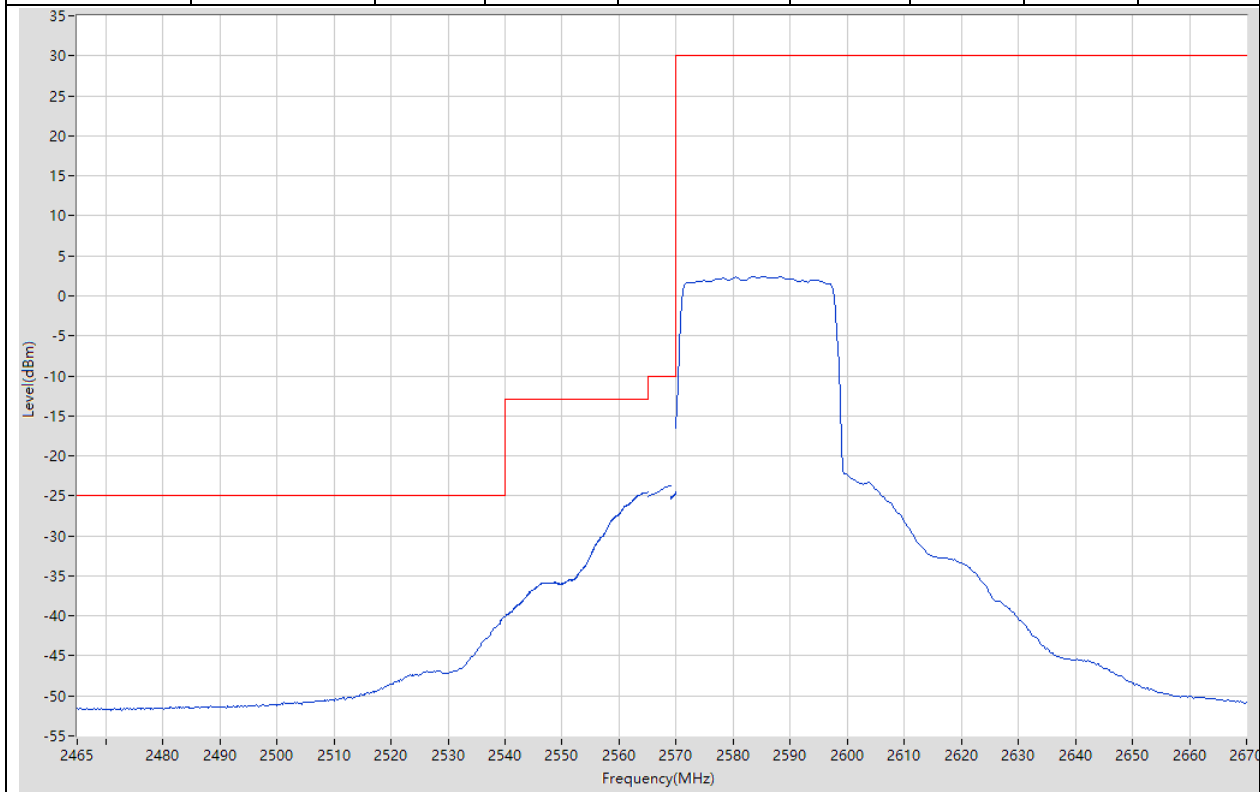


32.15. Band Edge for SA(NTNV)(Subtest:7, Channel:521000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:77)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2520 | 2620 | 1 | RMS | 2618.75 | 19.25 | 30 | Pass | 401 |
| 2620 | 2621 | 0.6 | RMS | 2620 | -20.76 | -10 | Pass | 3 |
| 2621 | 2625 | 1 | RMS | 2621 | -33.96 | -10 | Pass | 401 |
| 2625 | 2650 | 1 | RMS | 2625.5 | -46.72 | -13 | Pass | 401 |
| 2650 | 2725 | 1 | RMS | 2713.563 | -50.81 | -25 | Pass | 401 |

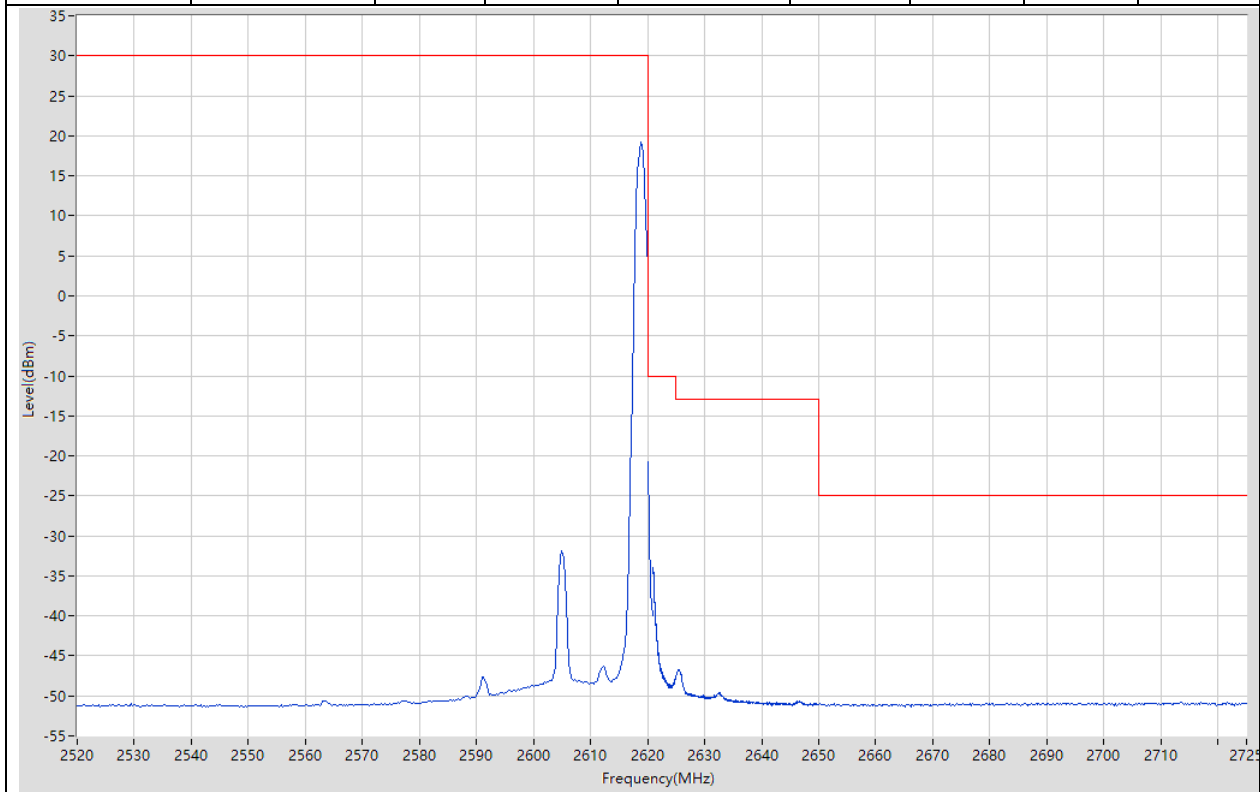

32.16. Band Edge for SA(NTNV)(Subtest:8, Channel:521000, Bandwidth:30, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:75, RB Position:0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2520 | 2620 | 1 | RMS | 2605 | 6.22 | 30 | Pass | 401 |
| 2620 | 2621 | 0.6 | RMS | 2620 | -20.2 | -10 | Pass | 3 |
| 2621 | 2625 | 1 | RMS | 2621.01 | -17.19 | -10 | Pass | 401 |
| 2625 | 2650 | 1 | RMS | 2625.063 | -18.41 | -13 | Pass | 401 |
| 2650 | 2725 | 1 | RMS | 2650 | -37.73 | -25 | Pass | 401 |

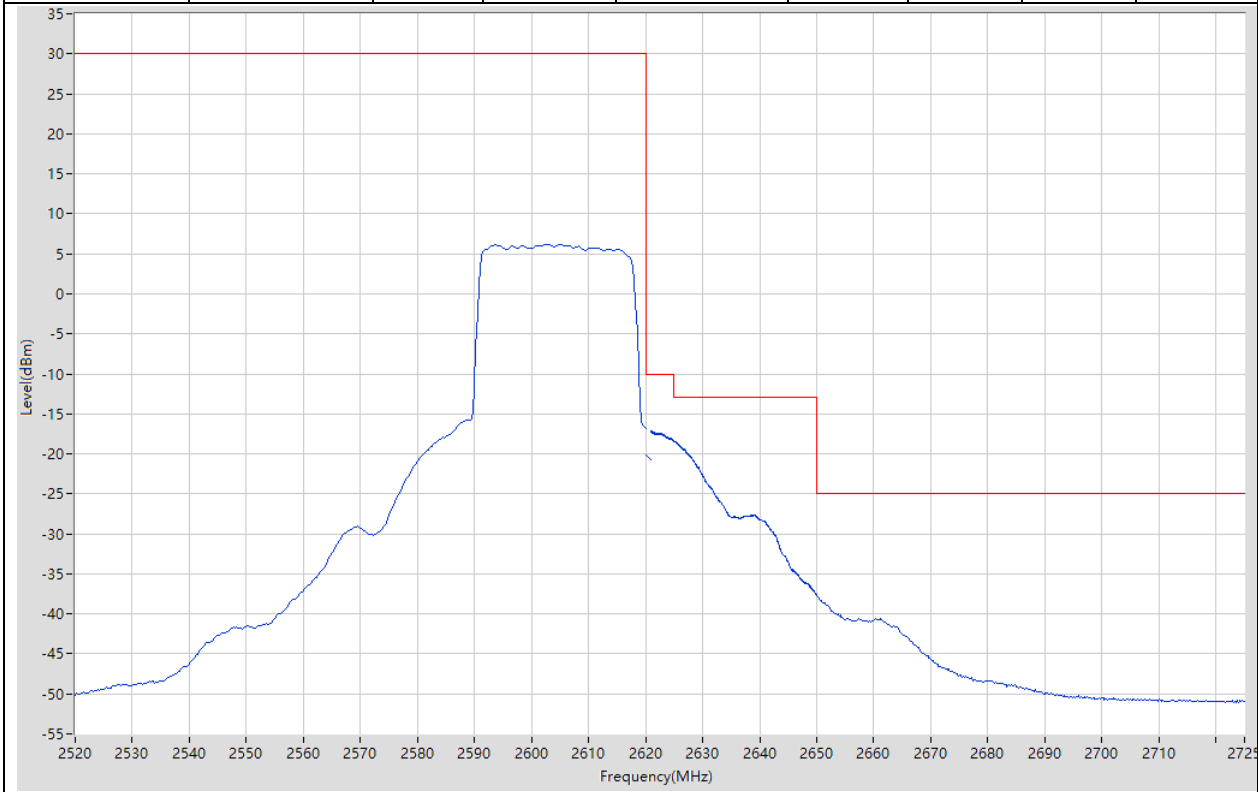

33. n41 30kHz_PC3


33.1. Band Edge for SA(NTNV)(Subtest:3, Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.763 | -44.53 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.05 | -10 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.995 | -27.34 | -10 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 21.89 | 30 | Pass | 401 |

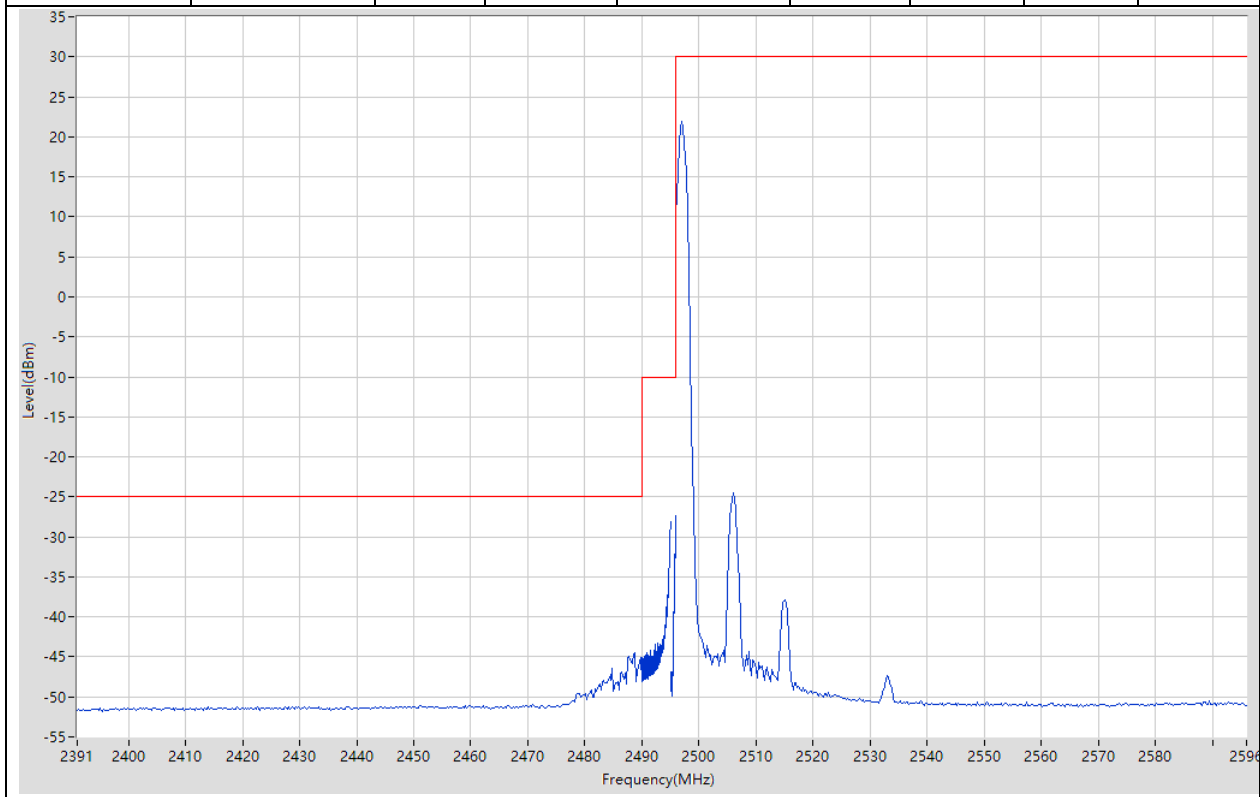


33.2. Band Edge for SA(NTNV)(Subtest:4, Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -28.02 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.988 | -25.31 | -10 | Pass | 401 |
| 2495 | 2496 | 0.4 | RMS | 2496 | -30.24 | -10 | Pass | 4 |
| 2496 | 2596 | 1 | RMS | 2510.25 | 10.32 | 30 | Pass | 401 |

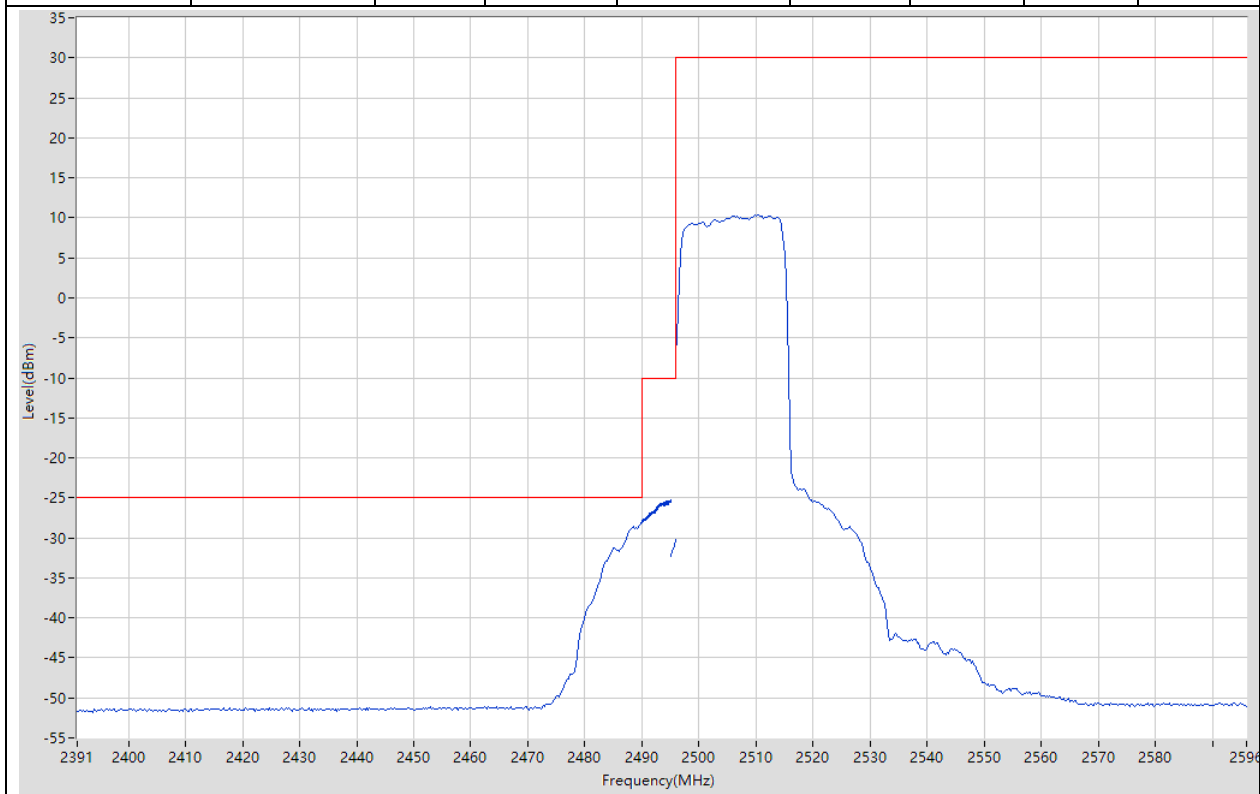


33.3. Band Edge for SA(NTNV)(Subtest:7, Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:50)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.24 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690 | -24.74 | -10 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -28.85 | -10 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2698.263 | -44.28 | -13 | Pass | 401 |
| 2710 | 2795 | 1 | RMS | 2775.025 | -49.92 | -25 | Pass | 401 |

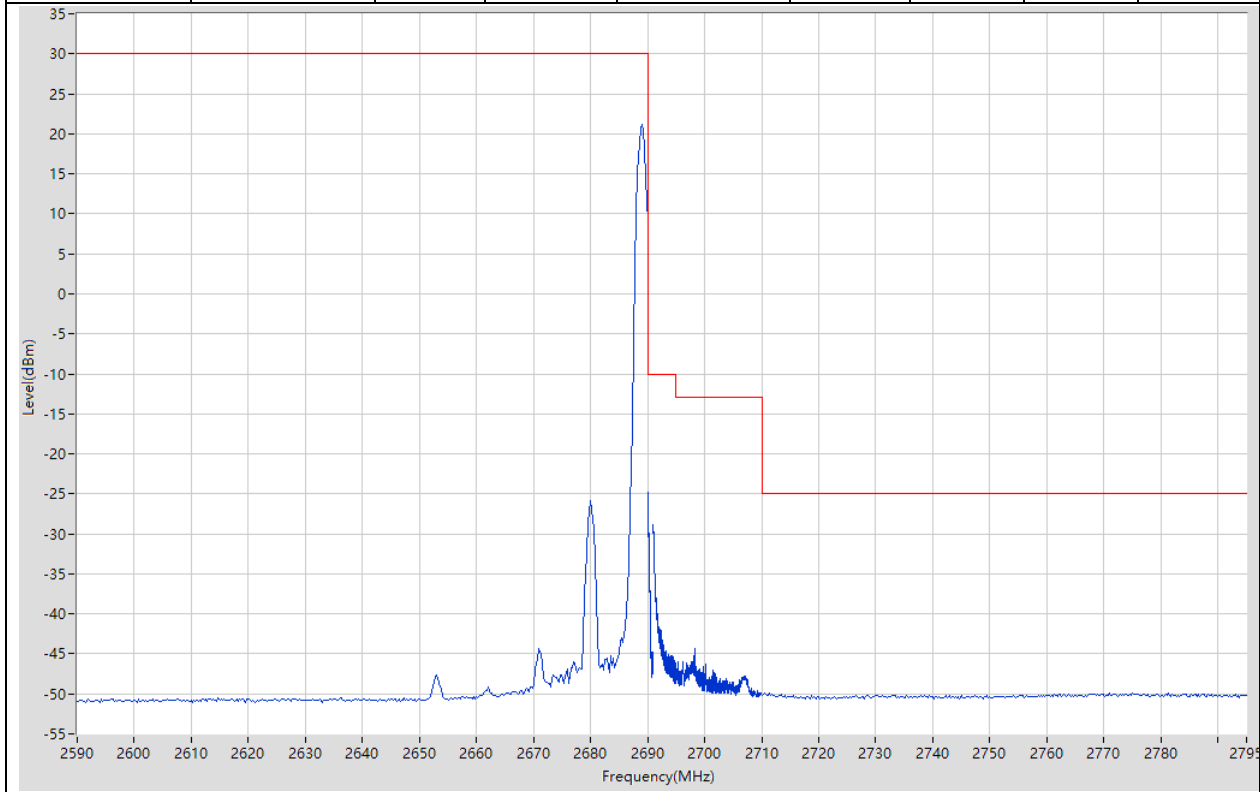


33.4. Band Edge for SA(NTNV)(Subtest:8, Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2680 | 9.64 | 30 | Pass | 401 |
| 2690 | 2691 | 0.4 | RMS | 2690 | -32.48 | -10 | Pass | 4 |
| 2691 | 2695 | 1 | RMS | 2691.11 | -26.95 | -10 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2695.413 | -29.2 | -13 | Pass | 401 |
| 2710 | 2715 | 1 | RMS | 2712.075 | -46.98 | -25 | Pass | 401 |
| 2715 | 2795 | 1 | RMS | 2715.2 | -47.33 | -25 | Pass | 401 |

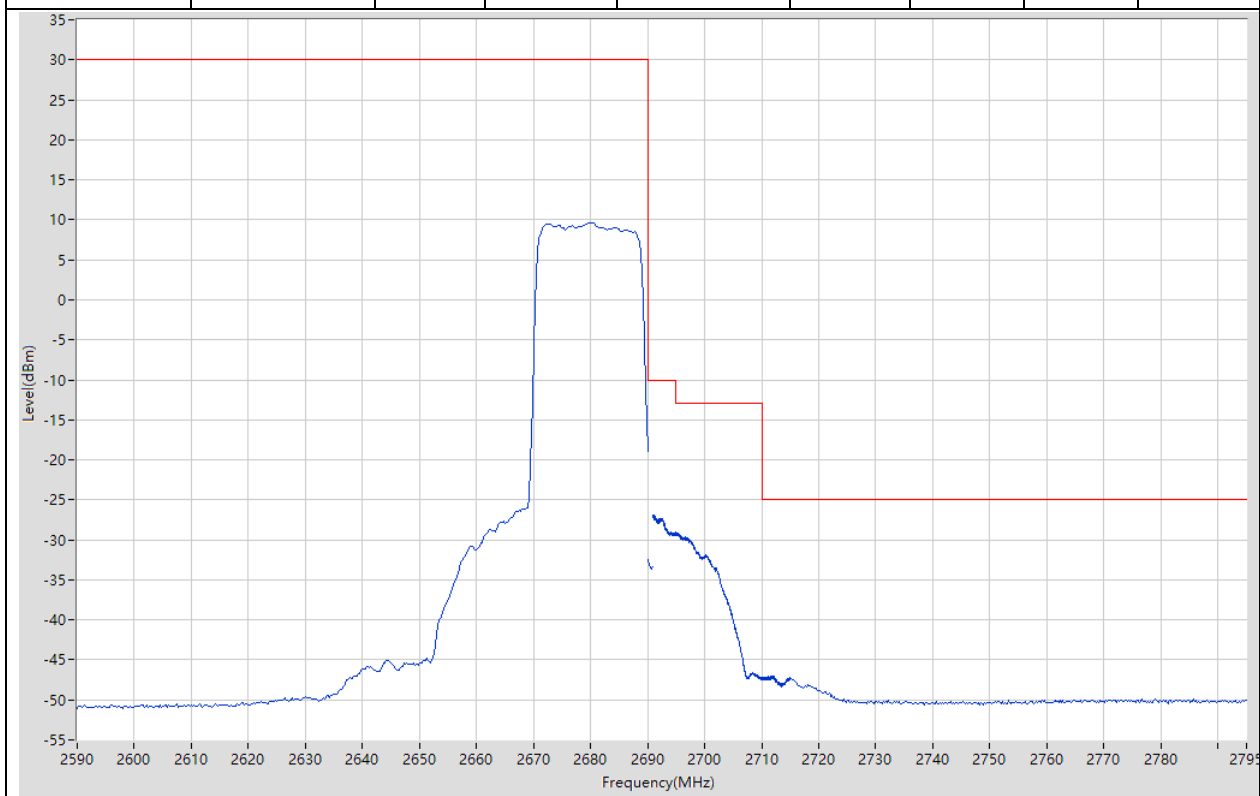


33.5. Band Edge for SA(NTNV)(Subtest:3, Channel:505200, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.515 | -45.86 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -27.86 | -10 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.988 | -27.2 | -10 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 21.93 | 30 | Pass | 401 |

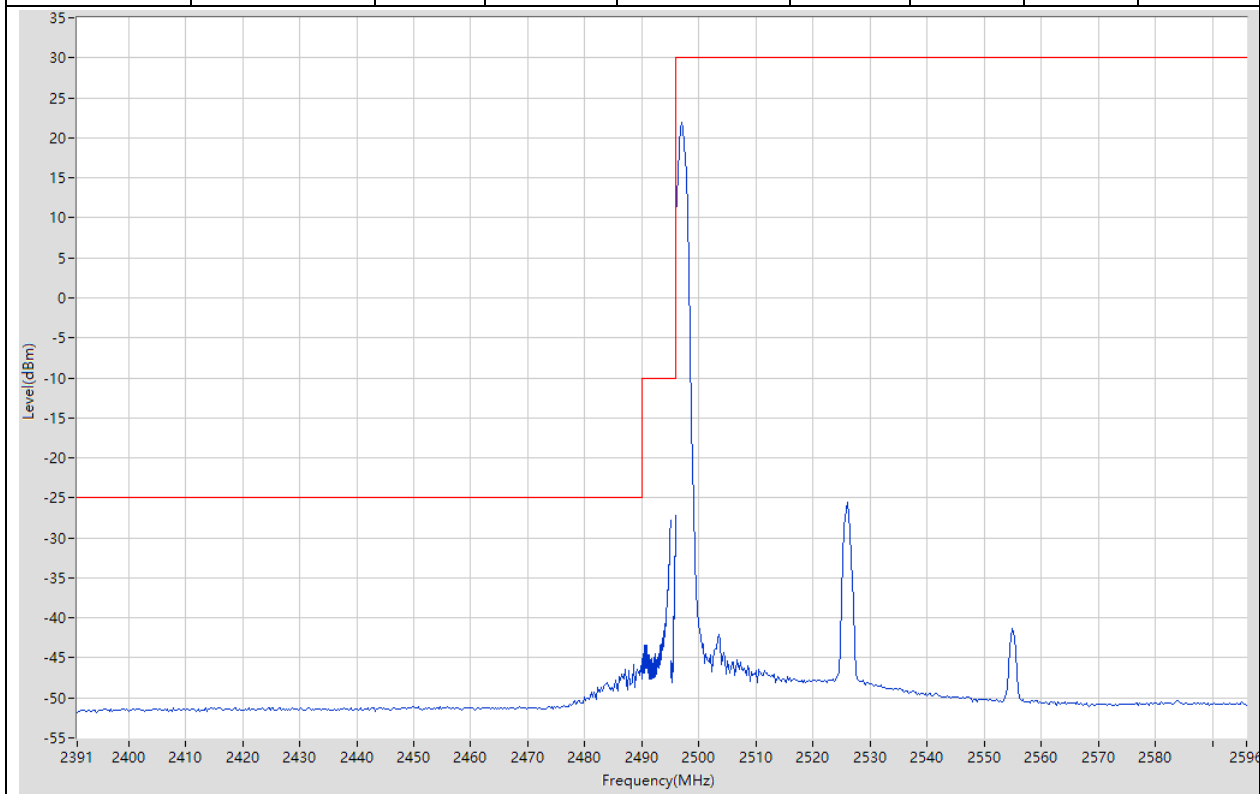


33.6. Band Edge for SA(NTNV)(Subtest:4, Channel:505200, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:162, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -33.02 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.788 | -30.2 | -10 | Pass | 401 |
| 2495 | 2496 | 1.2 | RMS | 2496 | -27.27 | -10 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2522.75 | 5.43 | 30 | Pass | 401 |

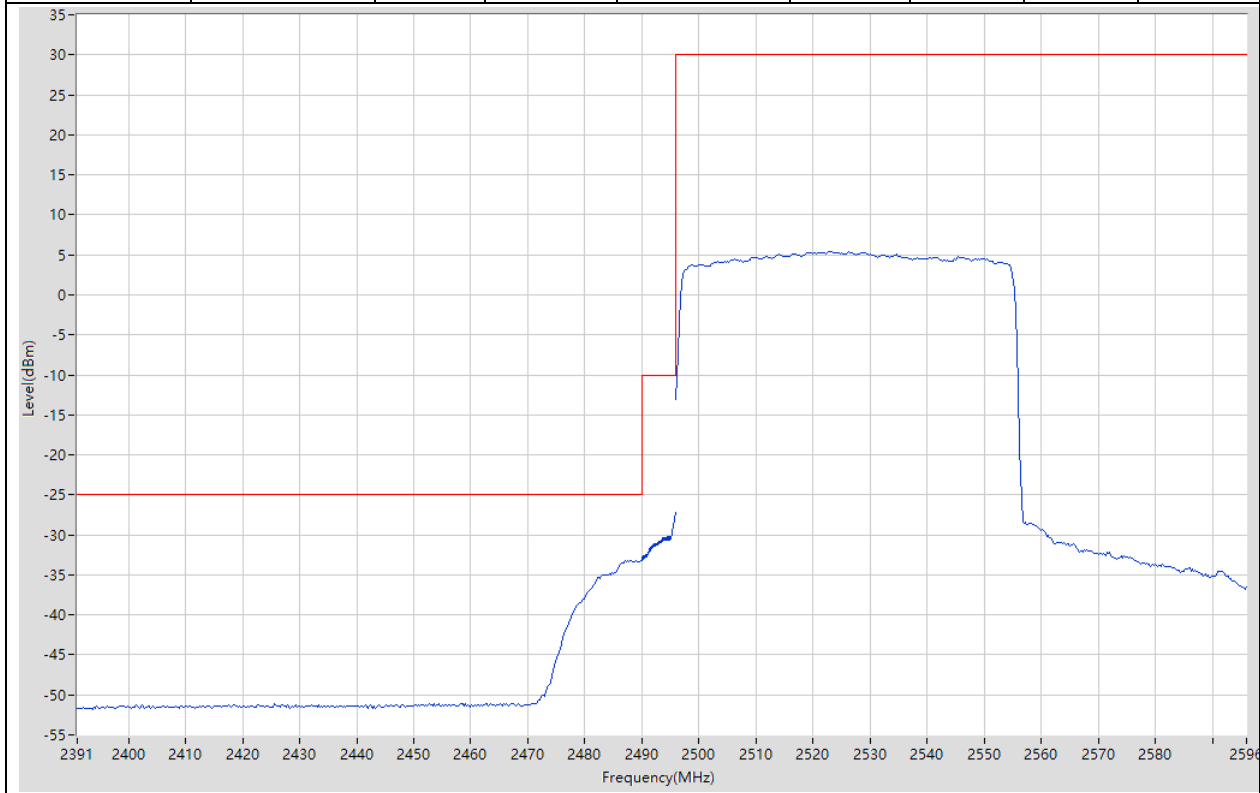


33.7. Band Edge for SA(NTNV)(Subtest:7, Channel:531996, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:161)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.43 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.005 | -24.85 | -10 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -29.56 | -10 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2695.55 | -46.83 | -13 | Pass | 401 |
| 2750 | 2795 | 1 | RMS | 2782.85 | -49.89 | -25 | Pass | 401 |

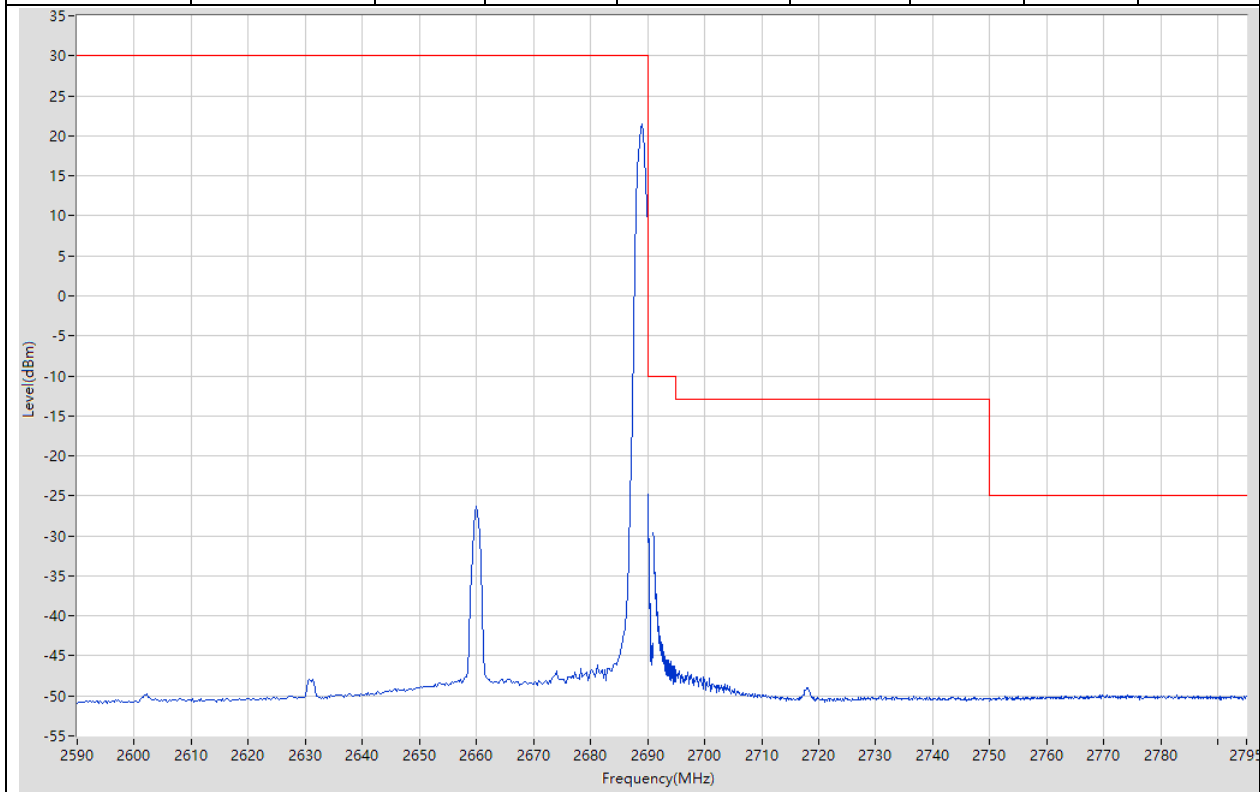


33.8. Band Edge for SA(NTNV)(Subtest:8, Channel:531996, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:162, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2662.75 | 5.02 | 30 | Pass | 401 |
| 2690 | 2691 | 1.2 | RMS | 2690 | -27.44 | -10 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2691.04 | -30.24 | -10 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2695 | -32.11 | -13 | Pass | 401 |
| 2750 | 2755 | 1 | RMS | 2751.85 | -50.01 | -25 | Pass | 401 |
| 2755 | 2795 | 1 | RMS | 2771.2 | -49.81 | -25 | Pass | 401 |

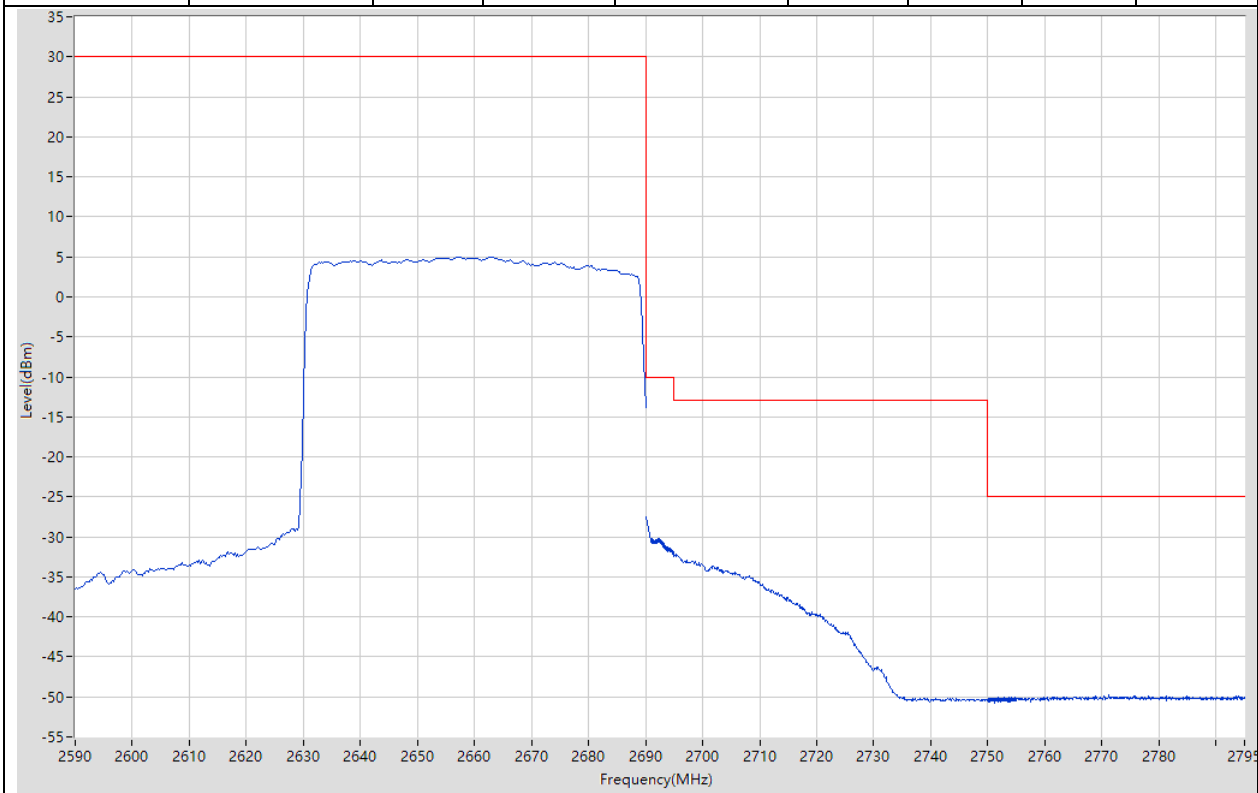


33.9. Band Edge for SA(NTNV)(Subtest:3, Channel:509202, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2487.773 | -44.44 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.69 | -10 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.995 | -27.61 | -10 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 21.74 | 30 | Pass | 401 |

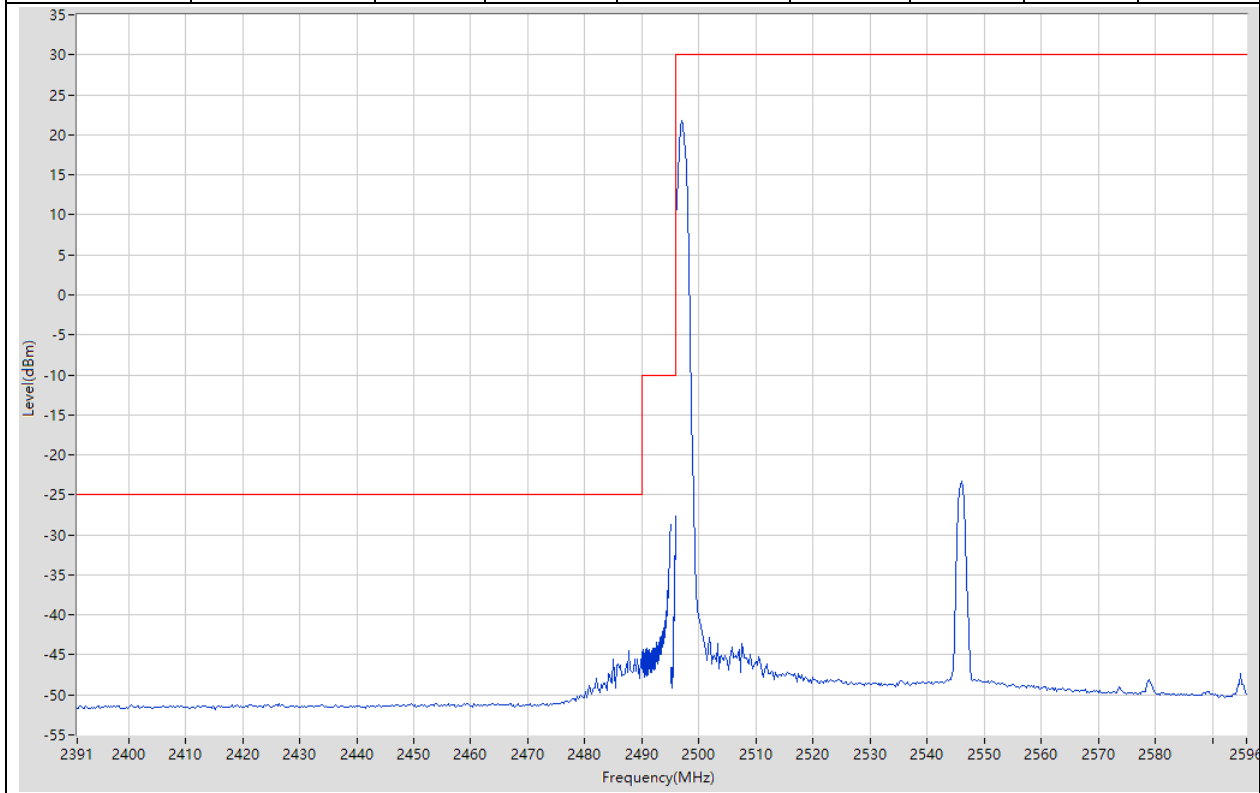


33.10. Band Edge for SA(NTNV)(Subtest:4, Channel:509202, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:270, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.753 | -33.16 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.275 | -32.65 | -10 | Pass | 401 |
| 2495 | 2496 | 1 | RMS | 2496 | -31.87 | -10 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2519.5 | 2.91 | 30 | Pass | 401 |

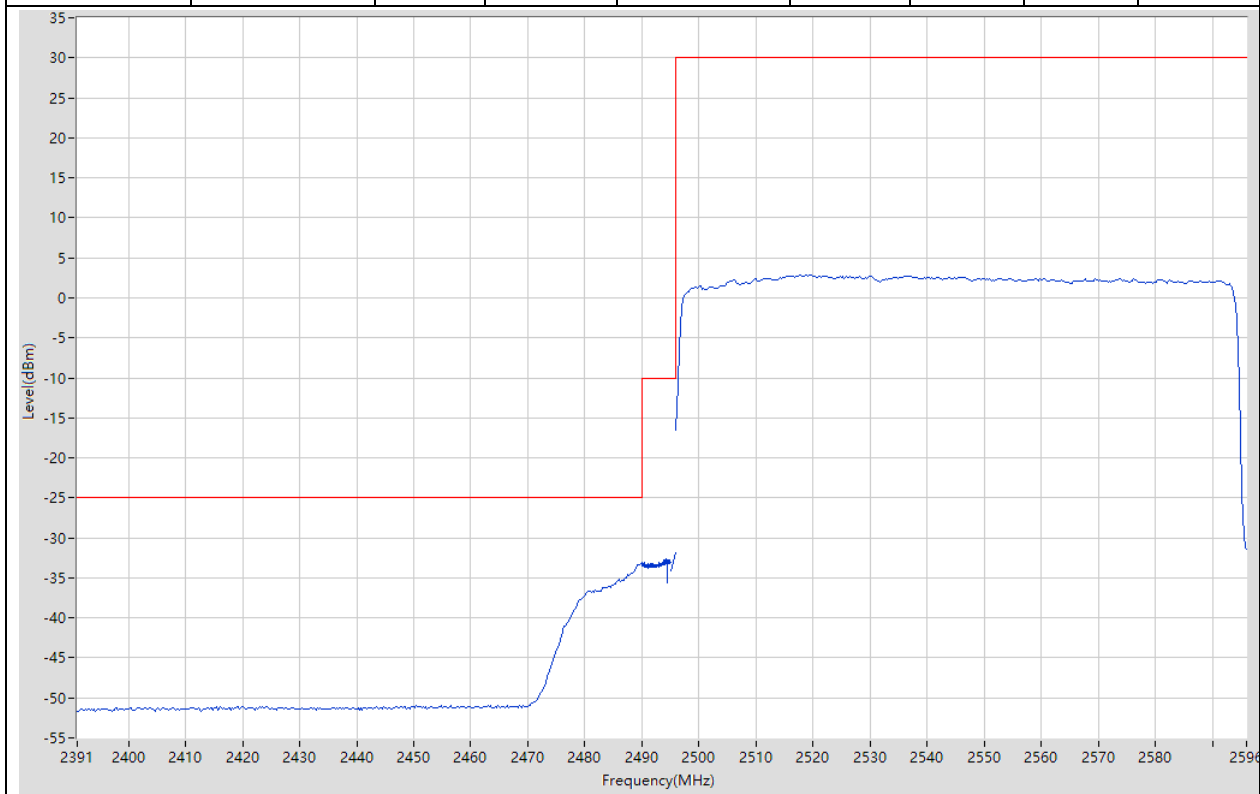


33.11. Band Edge for SA(NTNV)(Subtest:7, Channel:528000, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:272)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.49 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.005 | -24.82 | -10 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691.01 | -29.37 | -10 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2700.225 | -44.84 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2792.475 | -49.88 | -25 | Pass | 401 |

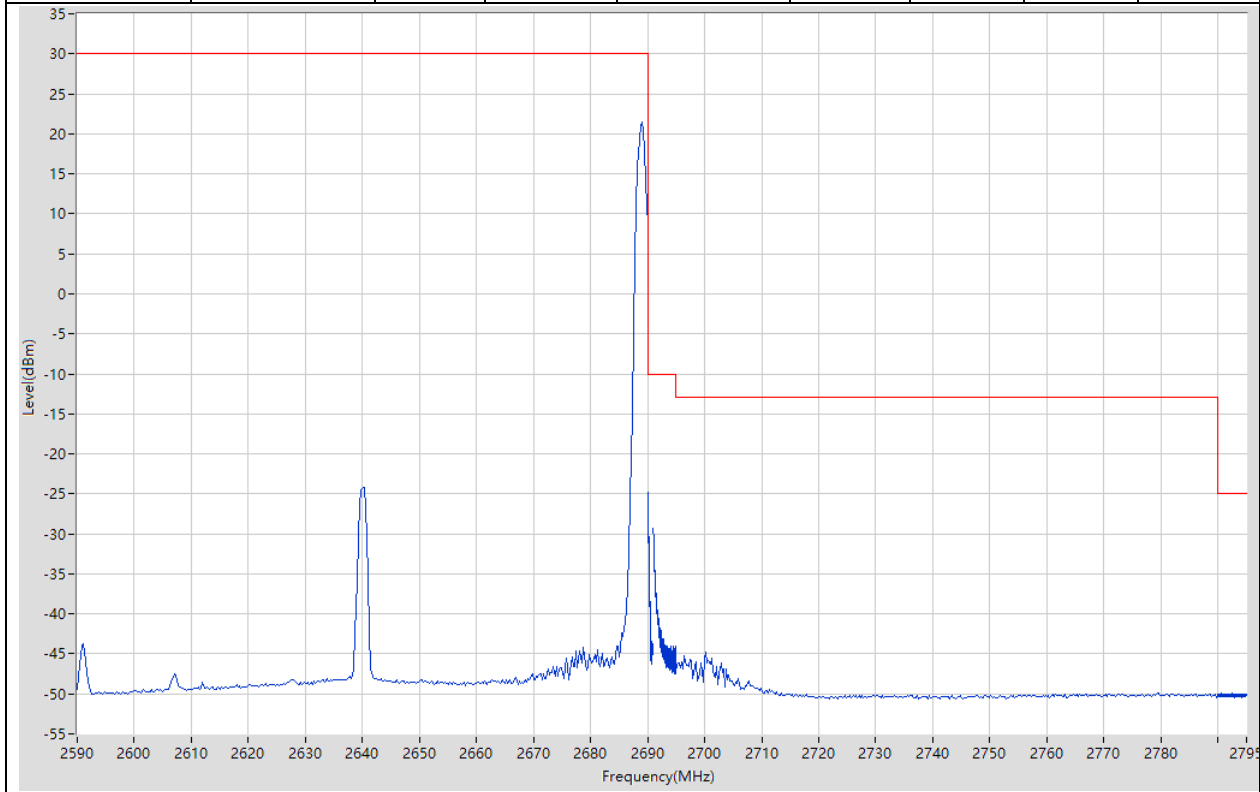


33.12. Band Edge for SA(NTNV)(Subtest:8, Channel:528000, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:270, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2599.75 | 3.47 | 30 | Pass | 401 |
| 2690 | 2691 | 2 | RMS | 2691 | -30.7 | -10 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2691.4 | -32.76 | -10 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2695.95 | -33.06 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2790.288 | -49.96 | -25 | Pass | 401 |

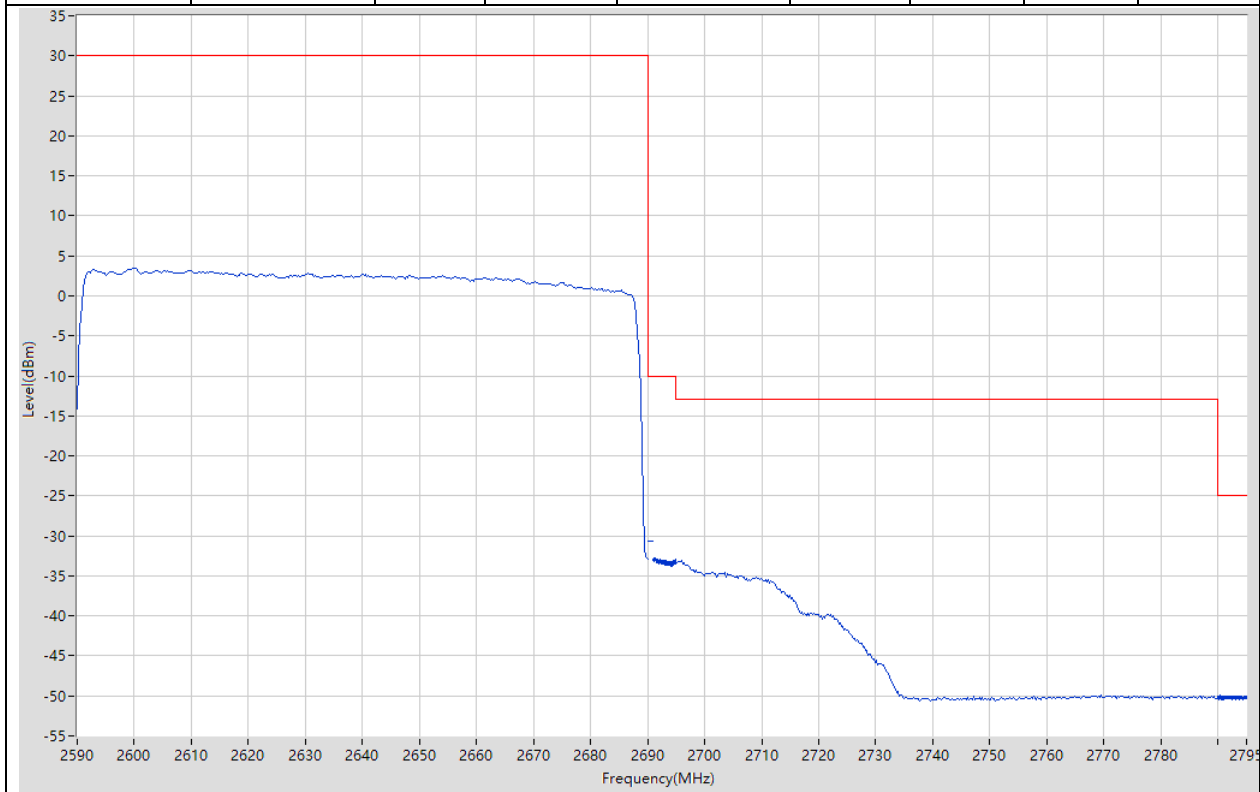


33.13. Band Edge for SA(NTNV)(Subtest:3, Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2487.278 | -46.05 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.69 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.995 | -28.34 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 20.93 | 30 | Pass | 401 |

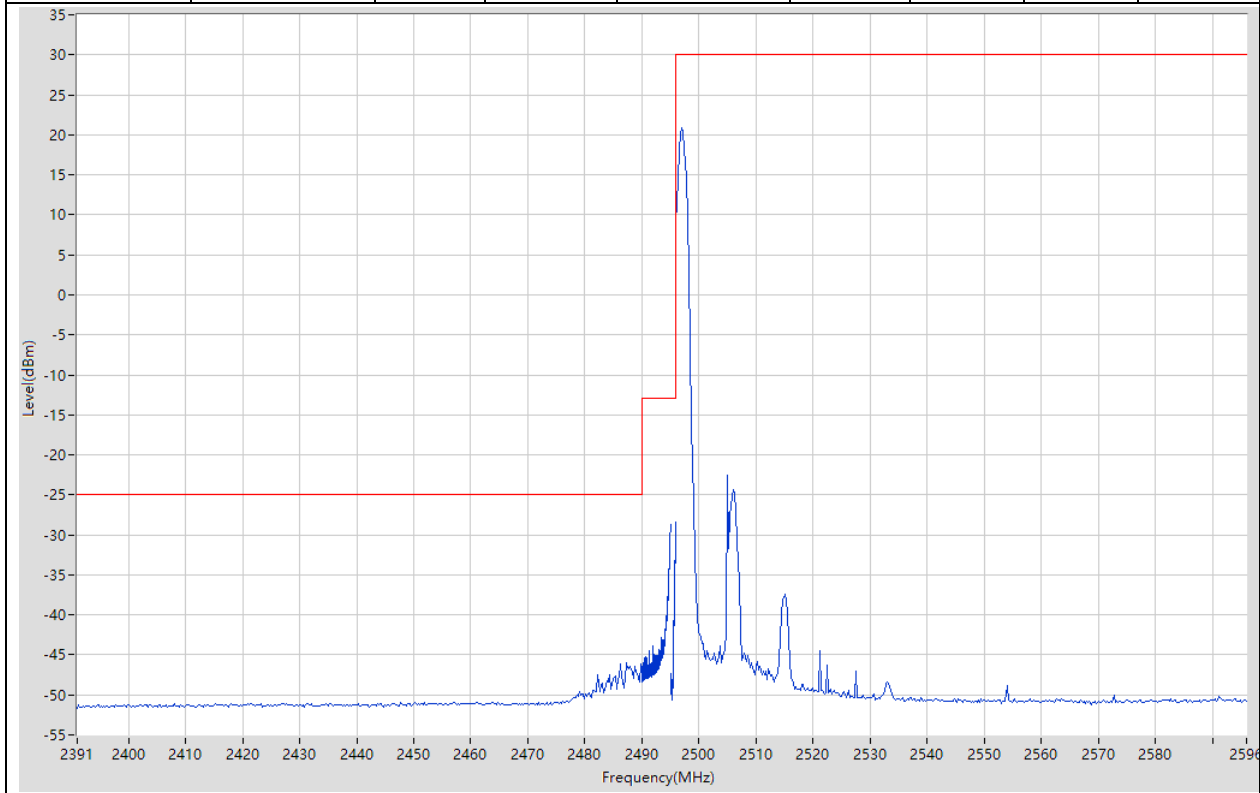


33.14. Band Edge for SA(NTNV)(Subtest:4, Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -29.7 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -26.94 | -13 | Pass | 401 |
| 2495 | 2496 | 0.4 | RMS | 2496 | -30.31 | -13 | Pass | 4 |
| 2496 | 2596 | 1 | RMS | 2507.25 | 9.19 | 30 | Pass | 401 |

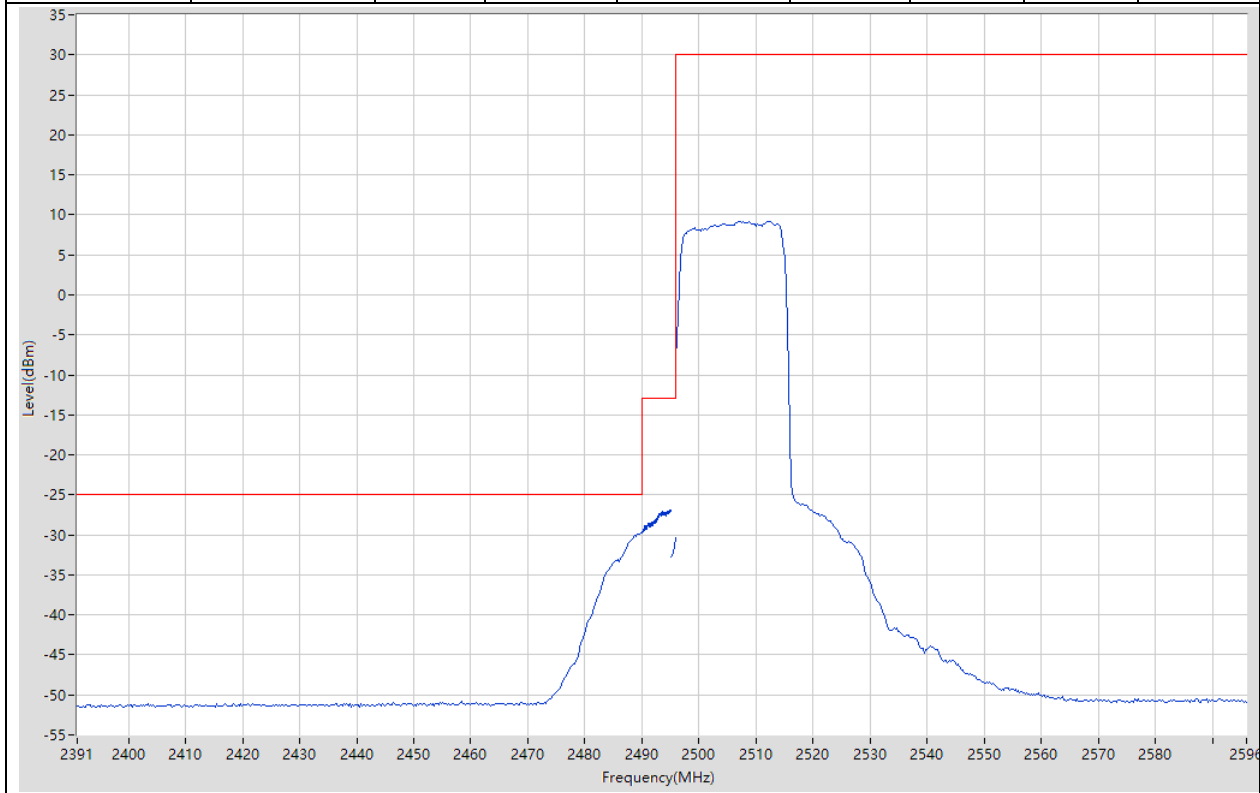


33.15. Band Edge for SA(NTNV)(Subtest:7, Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:50)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.37 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.005 | -24.08 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -28.67 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2698.075 | -46.15 | -13 | Pass | 401 |
| 2710 | 2795 | 1 | RMS | 2786.925 | -49.72 | -25 | Pass | 401 |

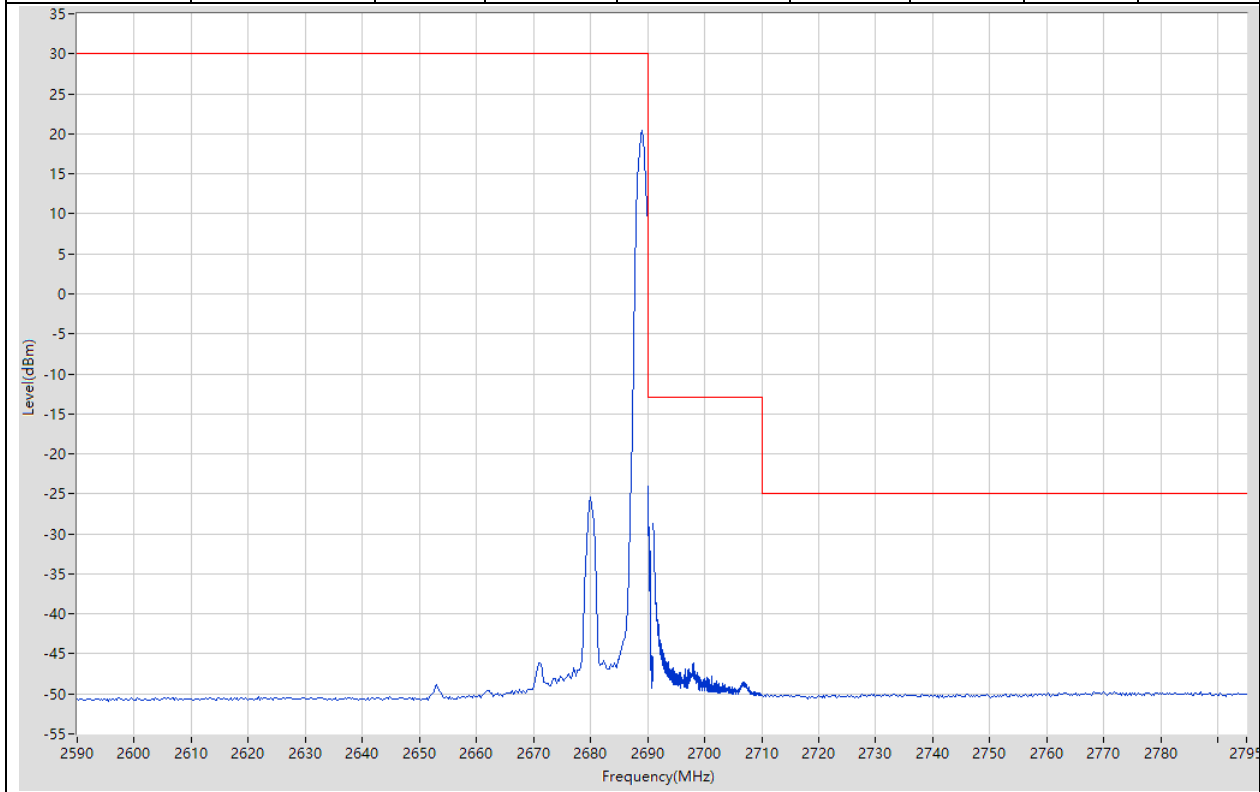


33.16. Band Edge for SA(NTNV)(Subtest:8, Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:50, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2673 | 8.73 | 30 | Pass | 401 |
| 2690 | 2691 | 0.4 | RMS | 2690 | -33.71 | -13 | Pass | 4 |
| 2691 | 2695 | 1 | RMS | 2691.15 | -29.31 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2695.075 | -31.06 | -13 | Pass | 401 |
| 2710 | 2715 | 1 | RMS | 2710.513 | -46.78 | -25 | Pass | 401 |
| 2715 | 2795 | 1 | RMS | 2715.4 | -48.05 | -25 | Pass | 401 |

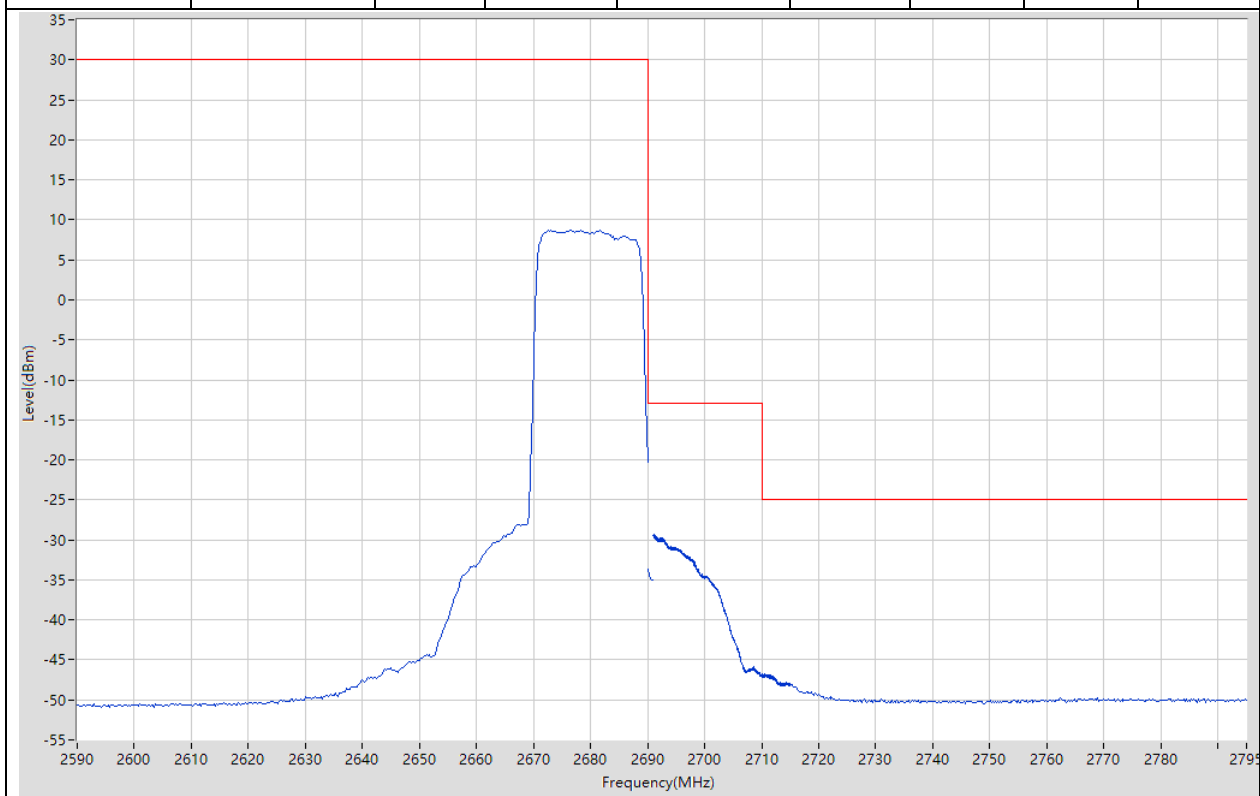


33.17. Band Edge for SA(NTNV)(Subtest:3, Channel:505200, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.753 | -46.5 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.71 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.998 | -28.22 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 20.98 | 30 | Pass | 401 |

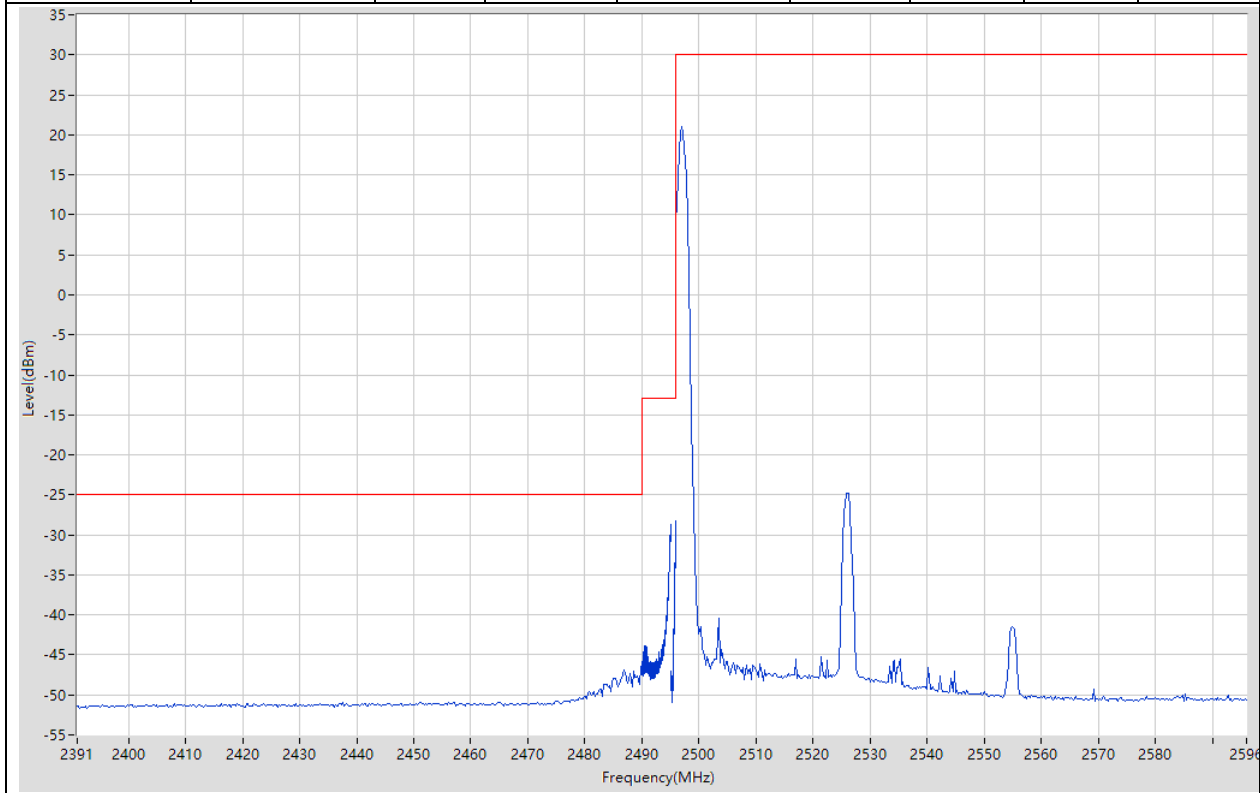


33.18. Band Edge for SA(NTNV)(Subtest:4, Channel:505200, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:162, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.258 | -34.23 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.65 | -31.99 | -13 | Pass | 401 |
| 2495 | 2496 | 1.2 | RMS | 2496 | -29.03 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2522.25 | 4.48 | 30 | Pass | 401 |

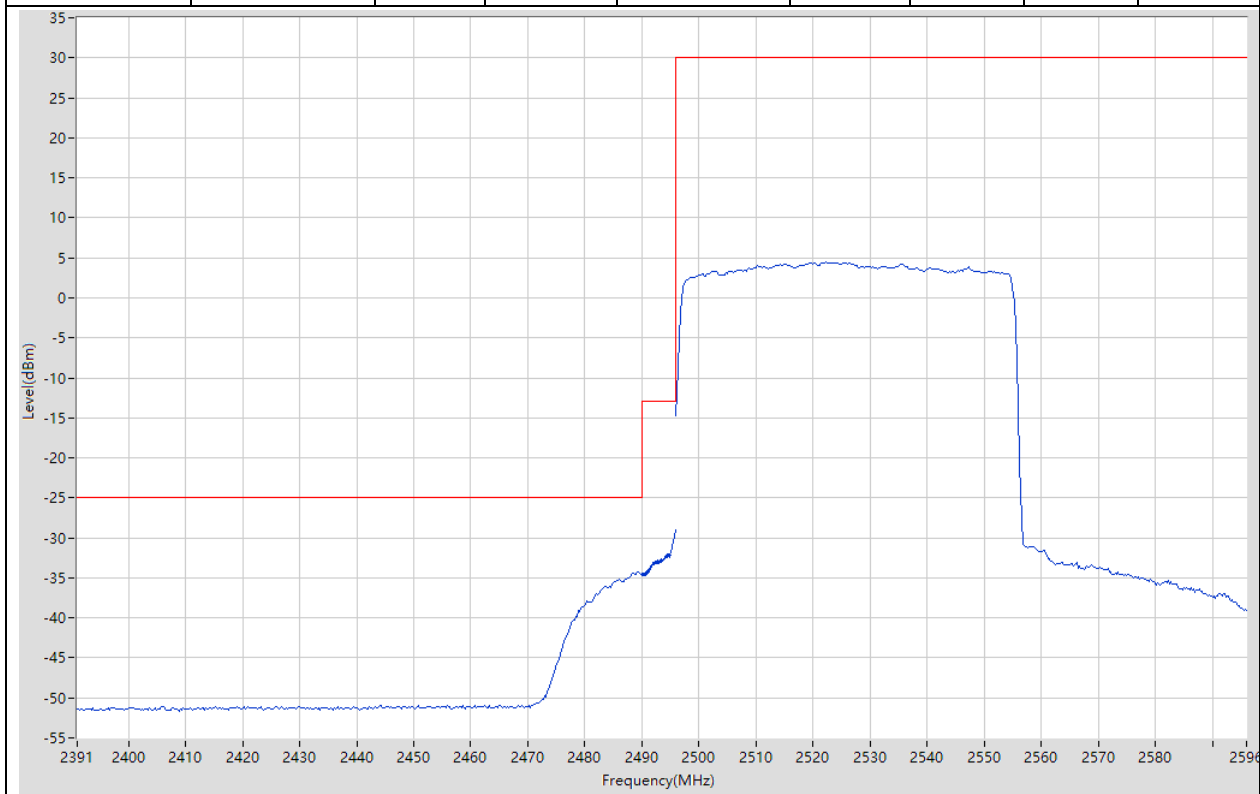


33.19. Band Edge for SA(NTNV)(Subtest:7, Channel:531996, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:161)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.18 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.018 | -25.62 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -30.86 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2696.375 | -47.32 | -13 | Pass | 401 |
| 2750 | 2795 | 1 | RMS | 2765.3 | -49.77 | -25 | Pass | 401 |

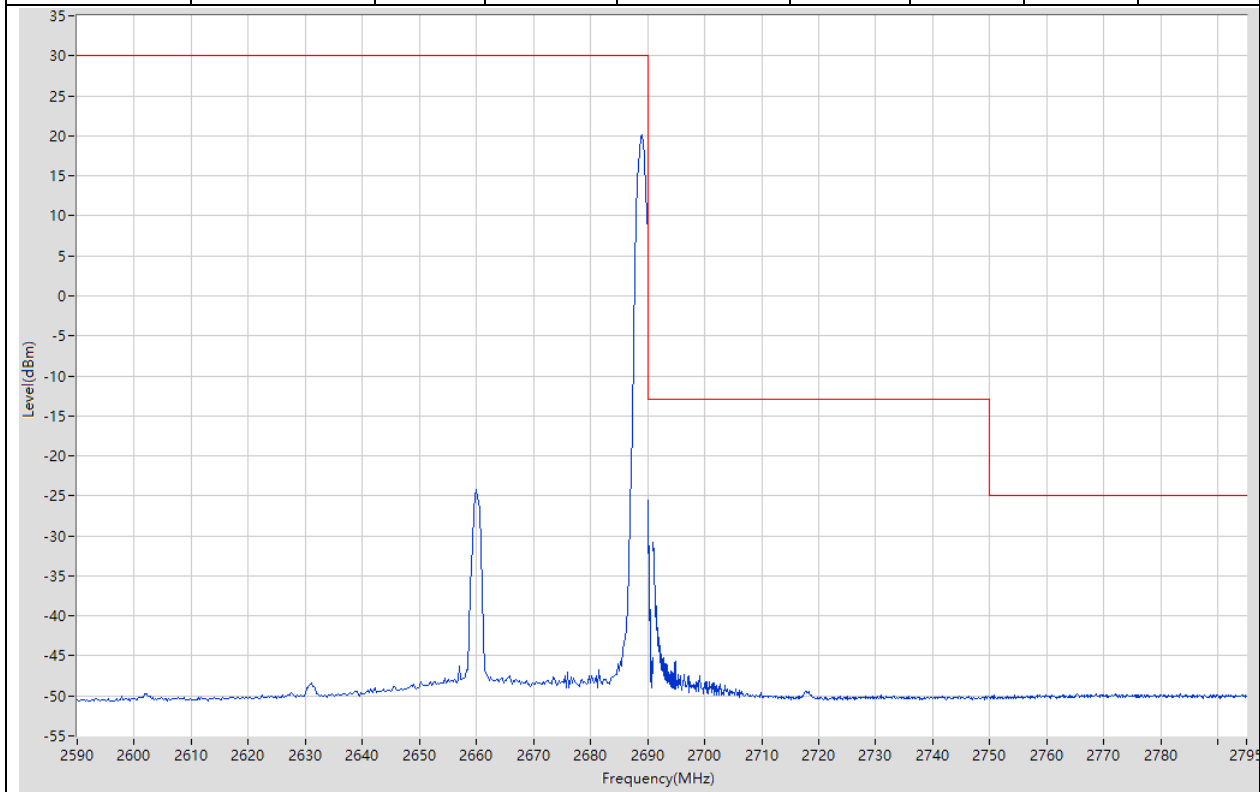


33.20. Band Edge for SA(NTNV)(Subtest:8, Channel:531996, Bandwidth:60, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:162, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2656.5 | 4.07 | 30 | Pass | 401 |
| 2690 | 2691 | 1.2 | RMS | 2690 | -28.4 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2691.04 | -33.1 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2695 | -34.44 | -13 | Pass | 401 |
| 2750 | 2755 | 1 | RMS | 2754.263 | -49.94 | -25 | Pass | 401 |
| 2755 | 2795 | 1 | RMS | 2794 | -49.7 | -25 | Pass | 401 |

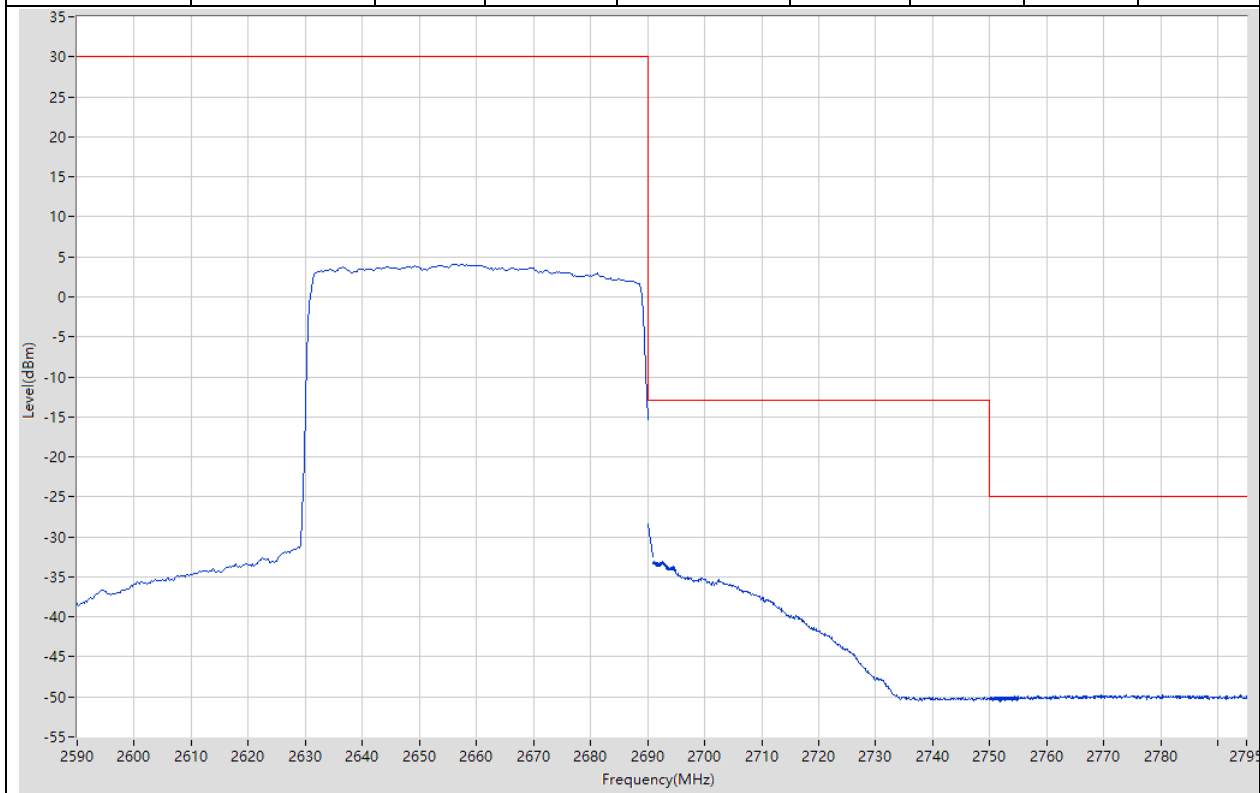


33.21. Band Edge for SA(NTNV)(Subtest:3, Channel:509202, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2485.05 | -46.52 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -30.14 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.995 | -29.04 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 20.9 | 30 | Pass | 401 |

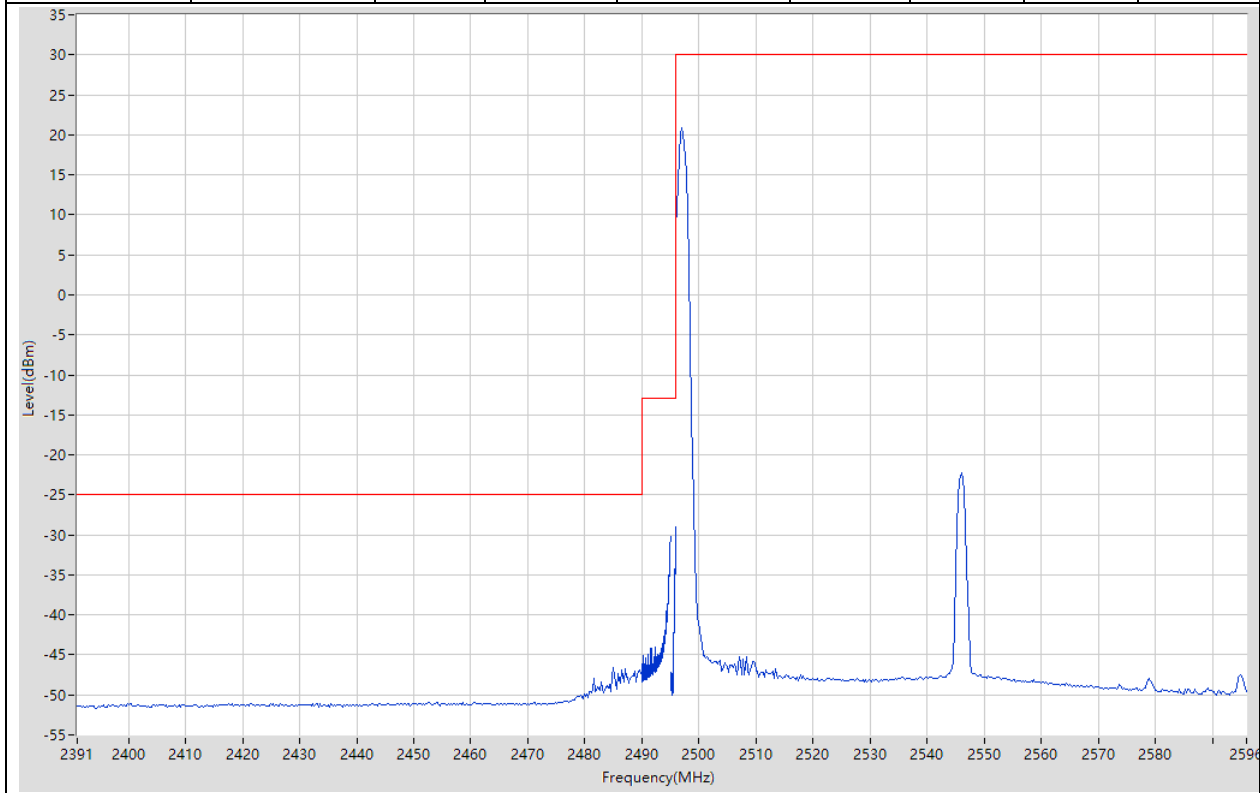


33.22. Band Edge for SA(NTNV)(Subtest:4, Channel:509202, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:270, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -36.07 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.963 | -35.17 | -13 | Pass | 401 |
| 2495 | 2496 | 1 | RMS | 2496 | -33.15 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2515.25 | 2.14 | 30 | Pass | 401 |

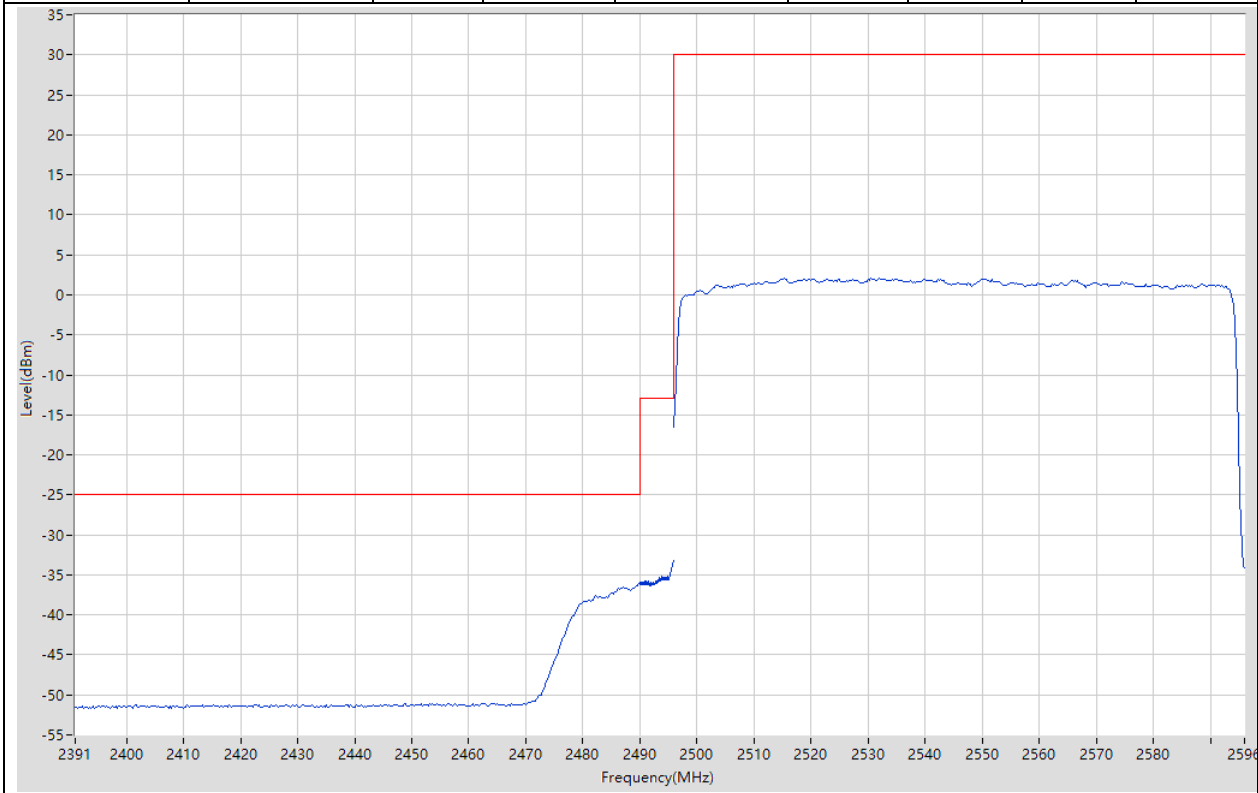


33.23. Band Edge for SA(NTNV)(Subtest:7, Channel:528000, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:272)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.49 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.01 | -24.88 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -29.97 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2699.75 | -45.57 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2794.713 | -49.79 | -25 | Pass | 401 |

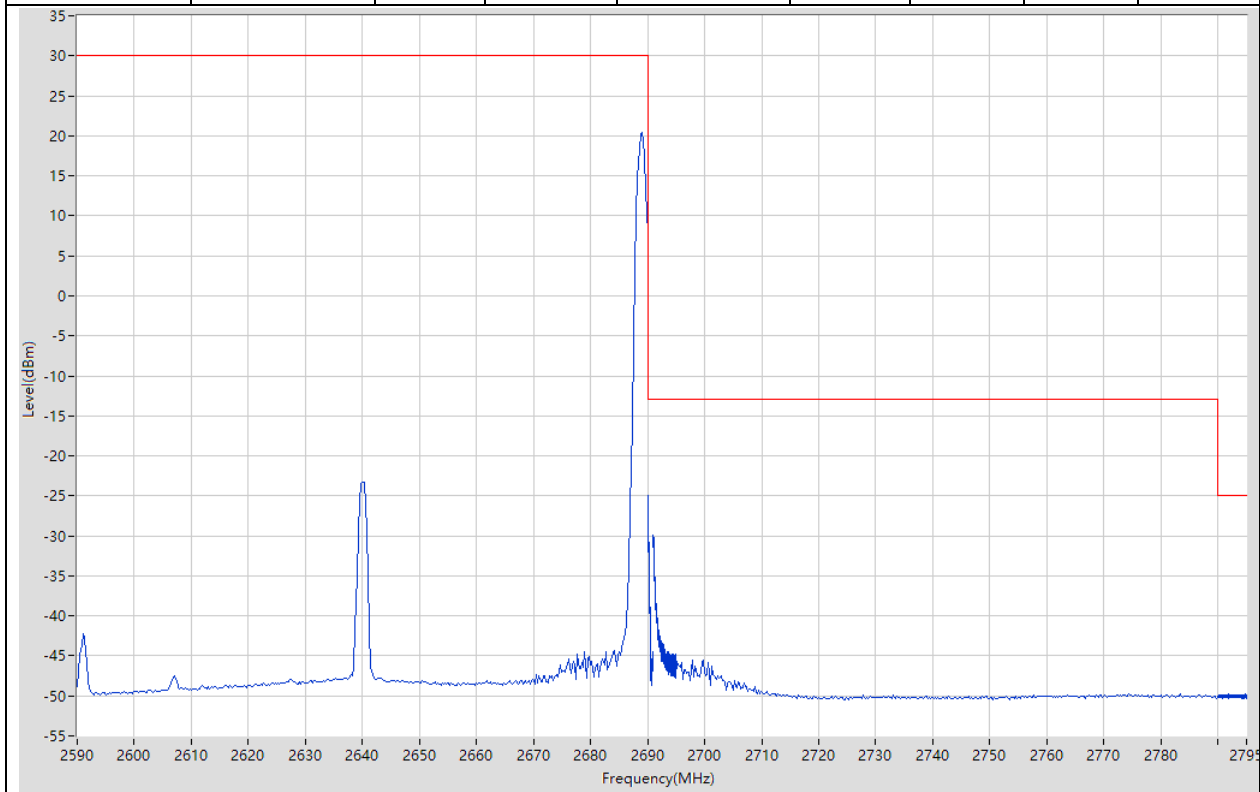

33.24. Band Edge for SA(NTNV)(Subtest:8, Channel:528000, Bandwidth:100, SCS:30, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:270, RB Position:0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2597.75 | 2.46 | 30 | Pass | 401 |
| 2690 | 2691 | 2 | RMS | 2691 | -33.3 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2693.39 | -35.99 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2695 | -36.47 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2793.538 | -49.8 | -25 | Pass | 401 |

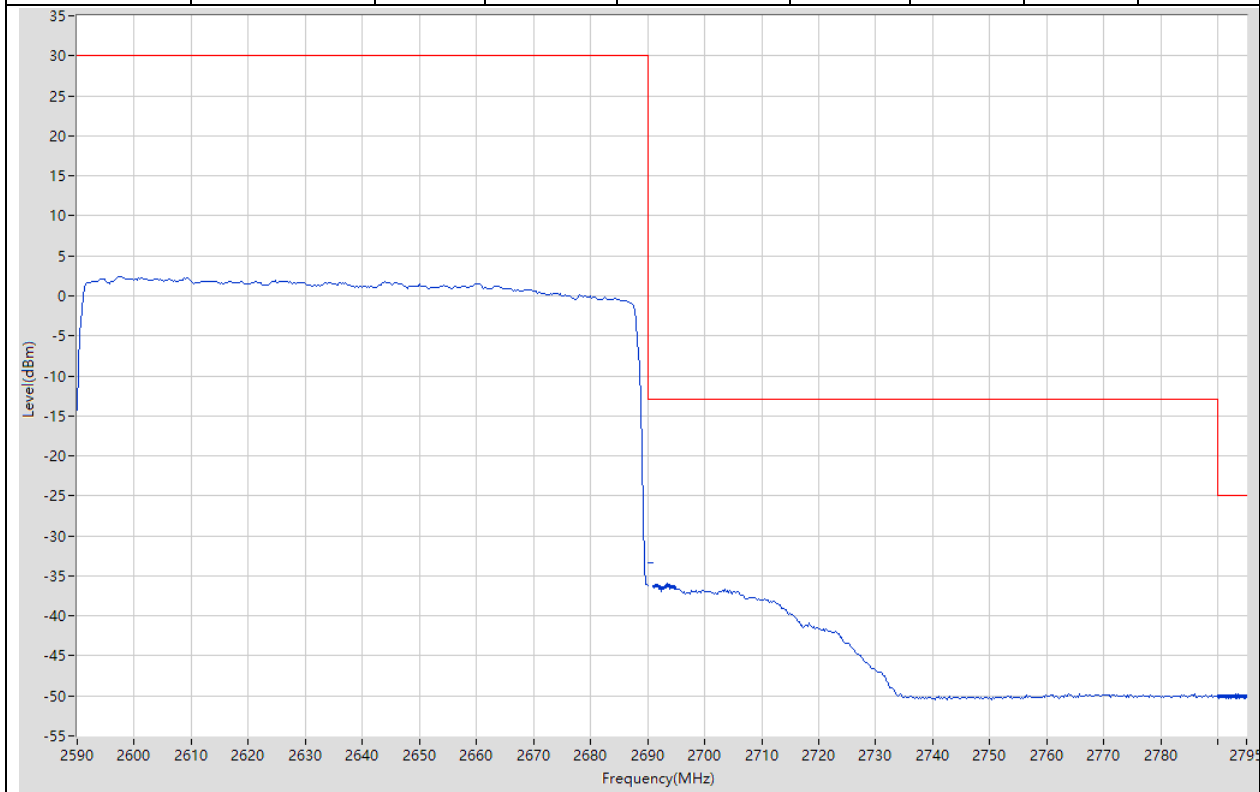

34. n66 15kHz


34.1. Band Edge for SA(NTNV)(Subtest:3, Channel:342500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1708 | -40.06 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -37.05 | -13 | Pass | 2 |
| 1709 | 1710 | 0.051 | RMS | 1710 | -16.3 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1710.3 | 21.96 | 30 | Pass | 401 |

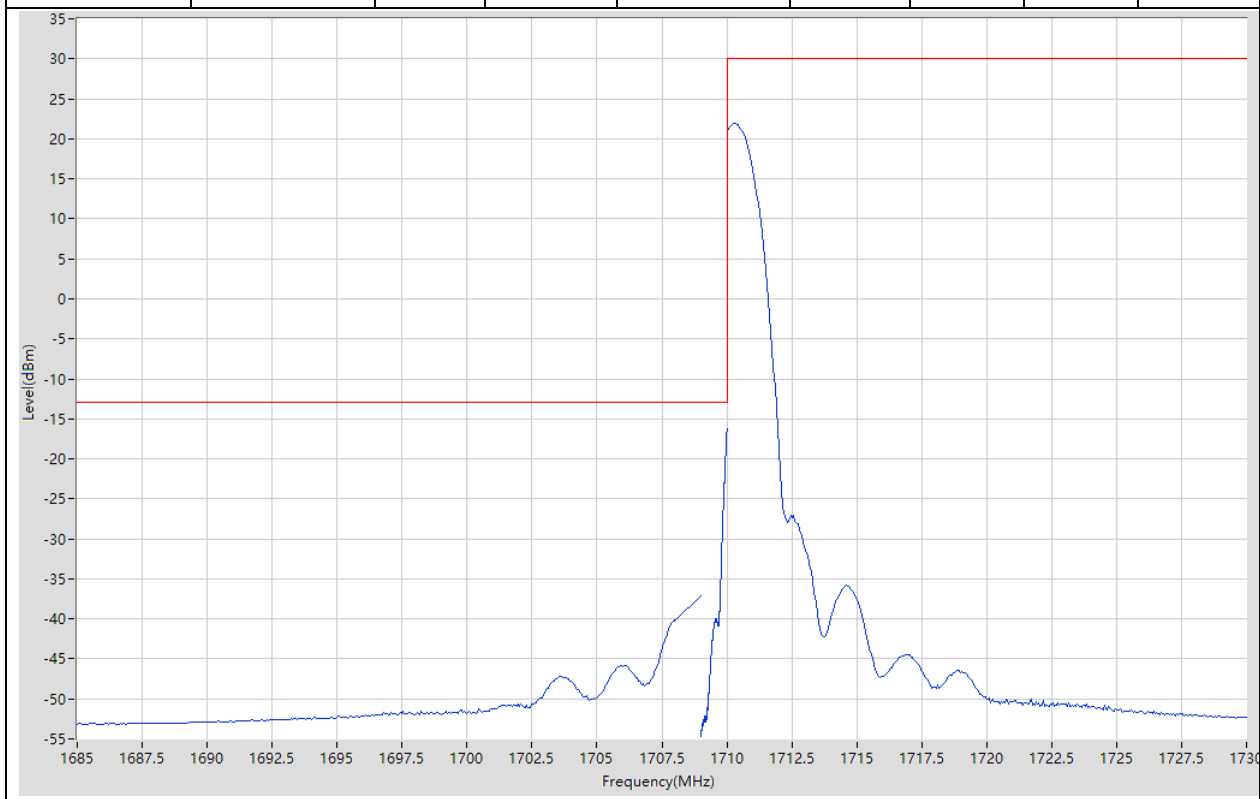


34.2. Band Edge for SA(NTNV)(Subtest:4, Channel:342500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:25, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1708 | -34.59 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -31.45 | -13 | Pass | 2 |
| 1709 | 1710 | 0.051 | RMS | 1710 | -29.99 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1713.8 | 15.74 | 30 | Pass | 401 |

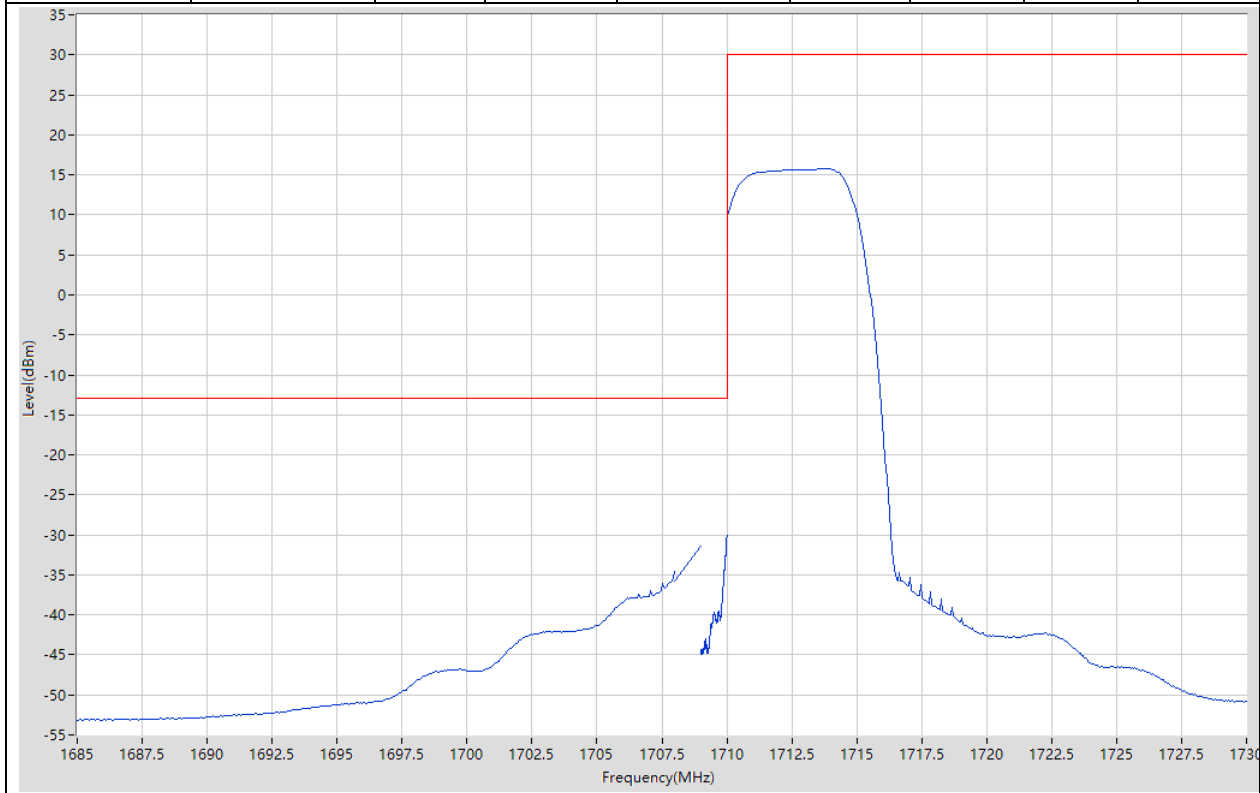


34.3. Band Edge for SA(NTNV)(Subtest:7, Channel:355500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:24)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.6 | 21.58 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780.003 | -18.04 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1782 | -38.4 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782 | -38.52 | -13 | Pass | 401 |

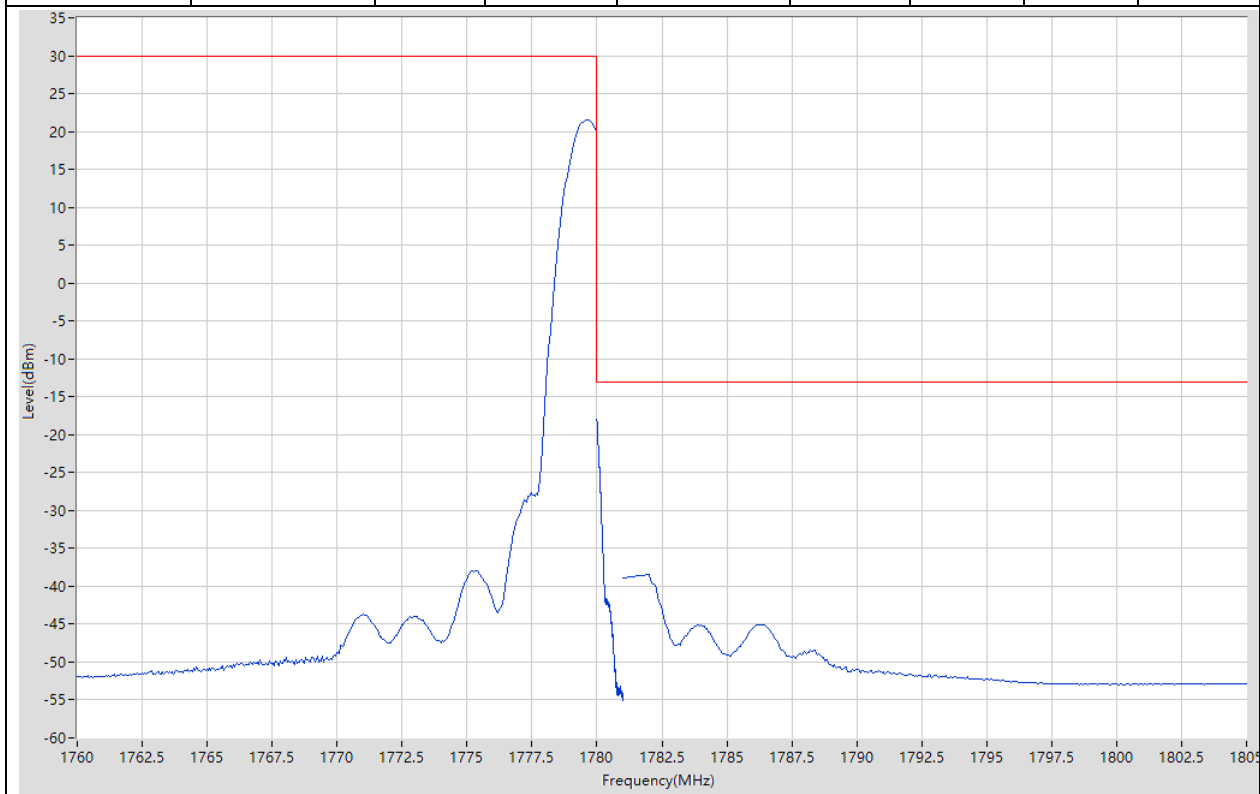


34.4. Band Edge for SA(NTNV)(Subtest:8, Channel:355500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:25, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1776.95 | 15.43 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780 | -29.25 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -29.41 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782 | -30.29 | -13 | Pass | 401 |

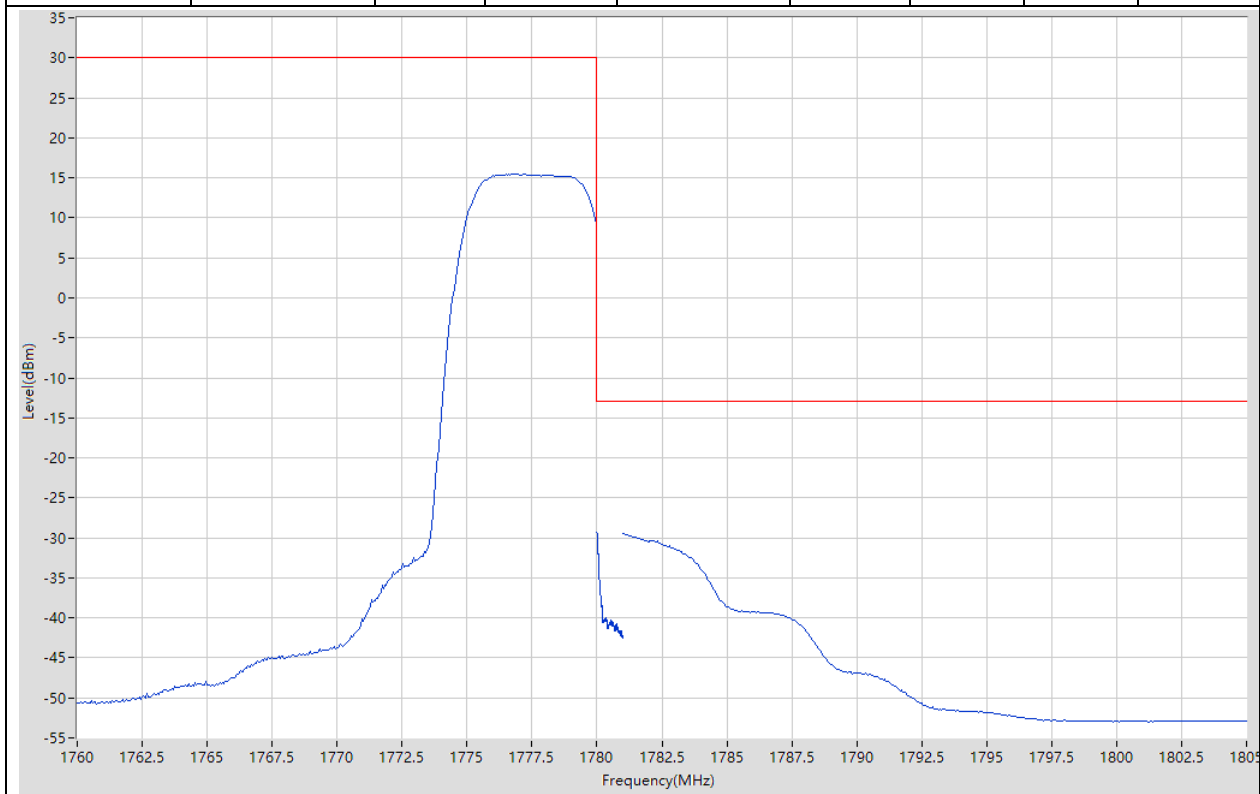


34.5. Band Edge for SA(NTNV)(Subtest:3, Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1701.1 | -40.91 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -39 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1710 | -17.87 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1710.5 | 21.97 | 30 | Pass | 401 |

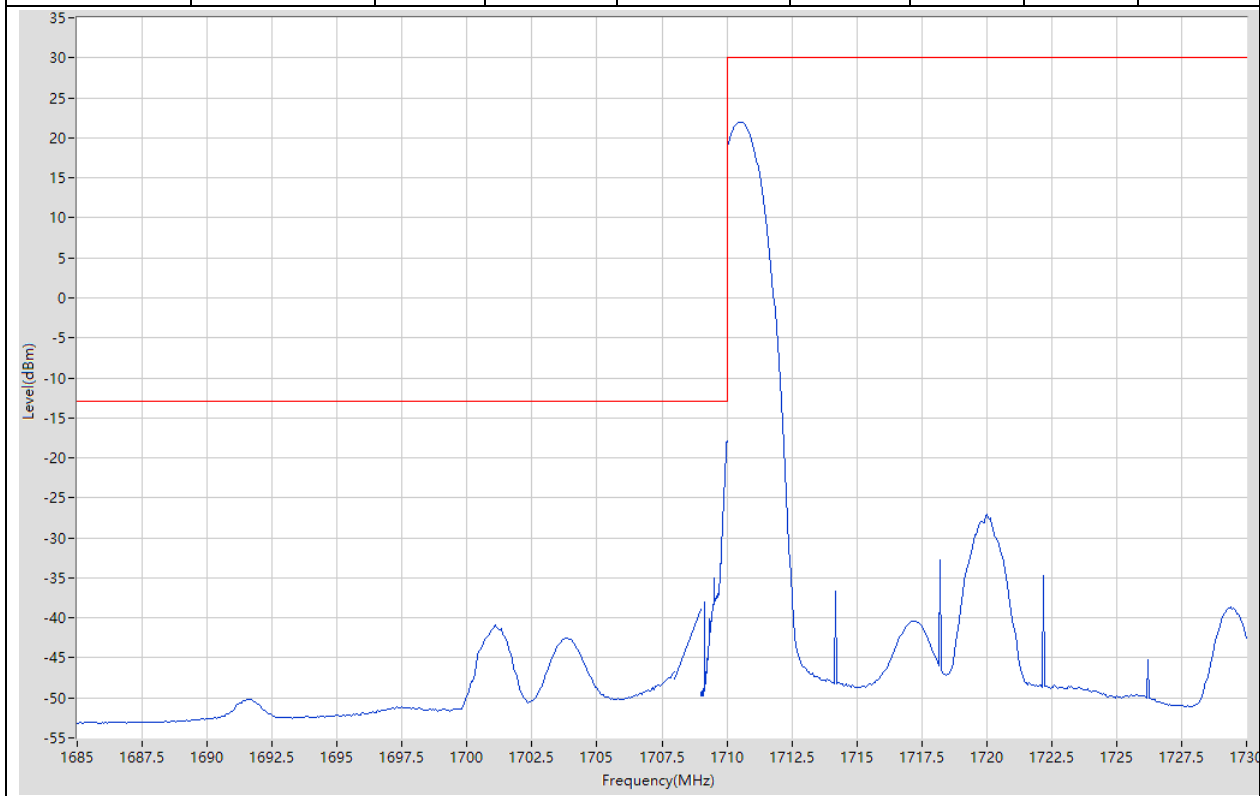


34.6. Band Edge for SA(NTNV)(Subtest:4, Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1708 | -31.09 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -29.13 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1710 | -33.76 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1724.8 | 9.96 | 30 | Pass | 401 |

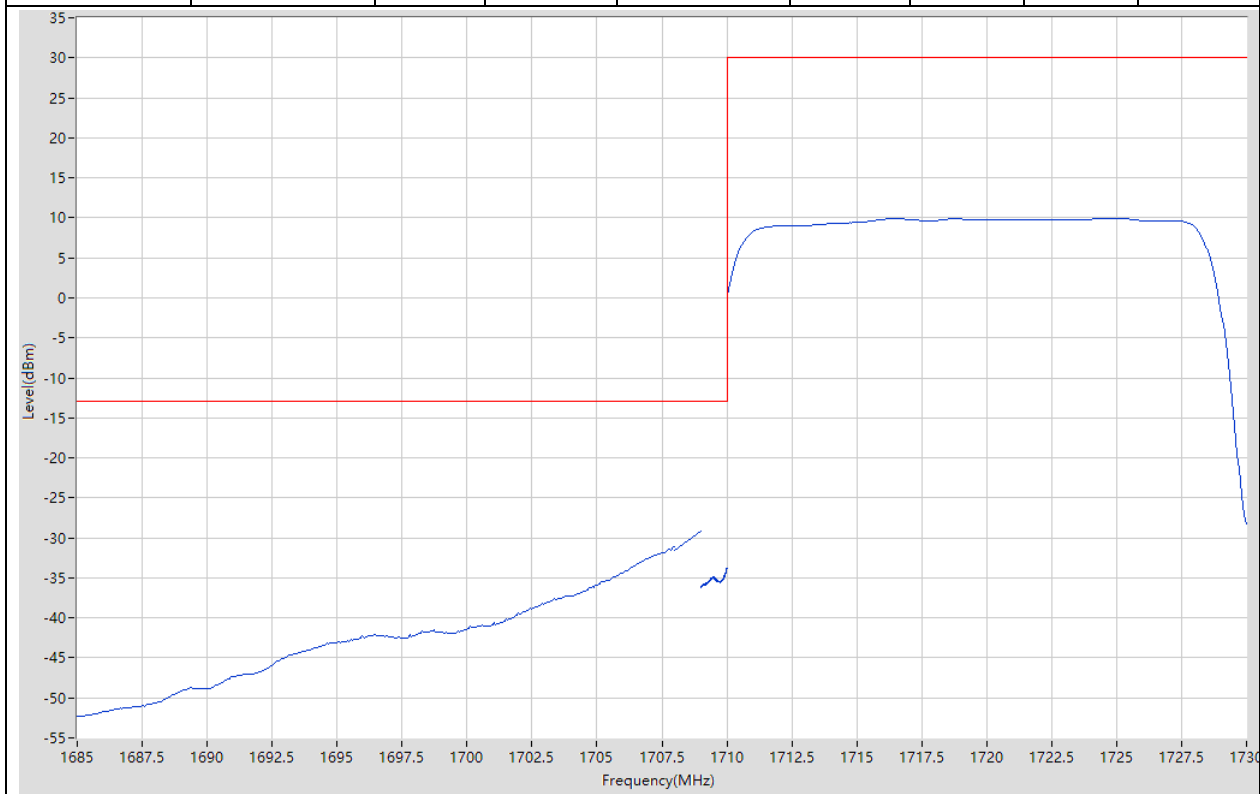


34.7. Band Edge for SA(NTNV)(Subtest:7, Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:105)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.4 | 21.64 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780.003 | -19.37 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -40.59 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1788.843 | -38.98 | -13 | Pass | 401 |

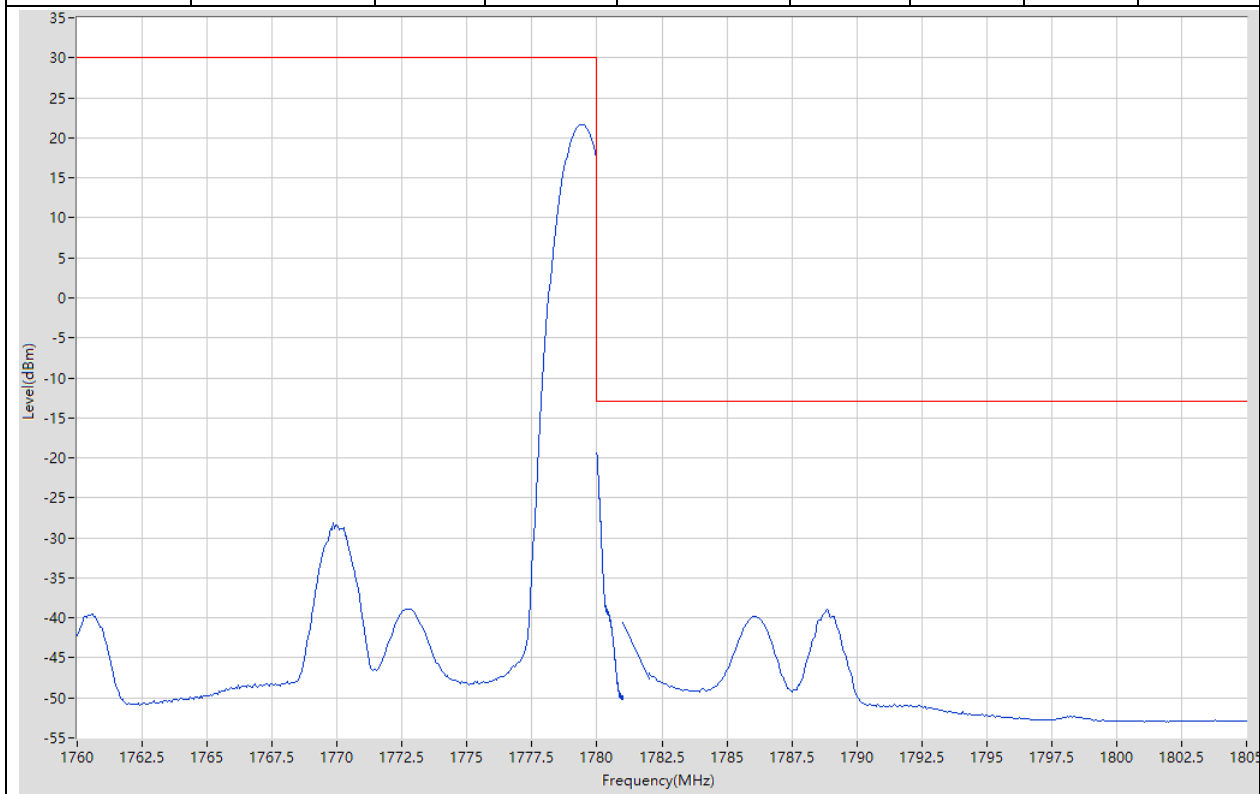


34.8. Band Edge for SA(NTNV)(Subtest:8, Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1774.95 | 9.64 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780.263 | -34.21 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -29 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782 | -29.83 | -13 | Pass | 401 |

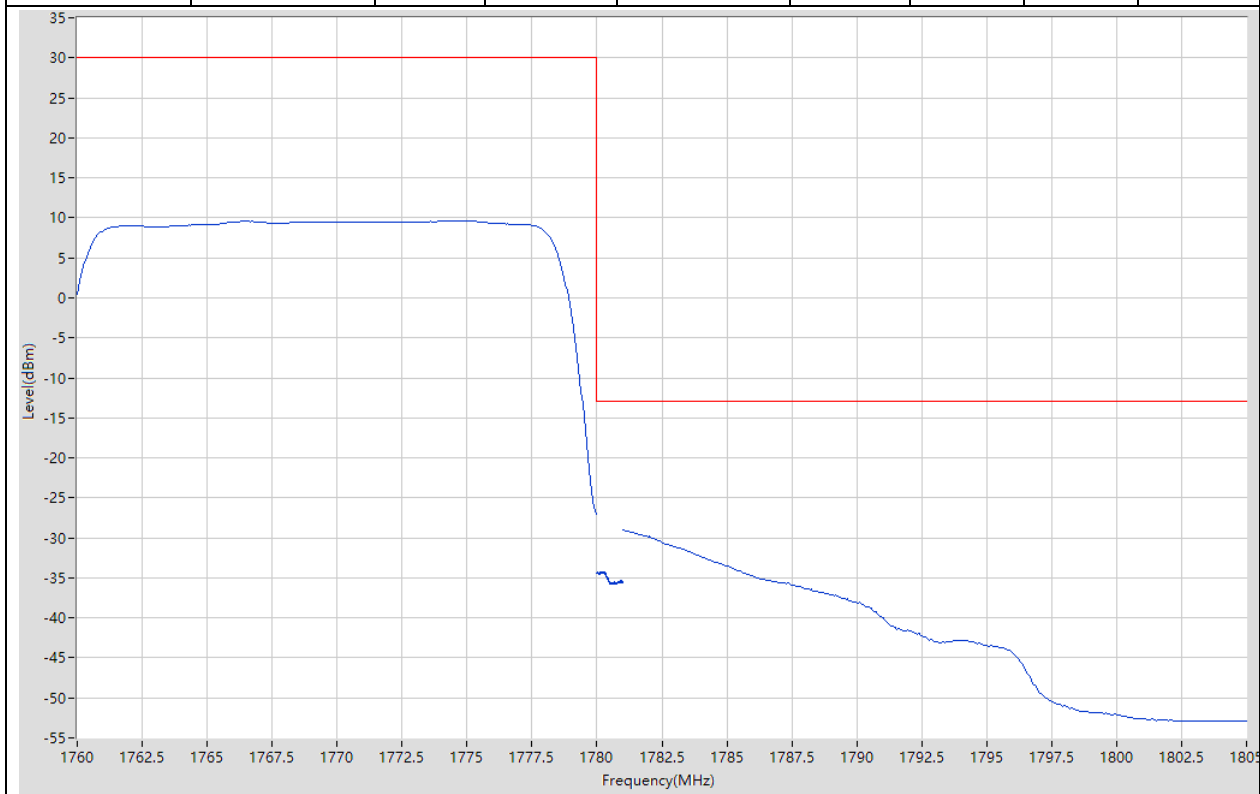


34.9. Band Edge for SA(NTNV)(Subtest:3, Channel:346000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1703.975 | -43.12 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -40.24 | -13 | Pass | 2 |
| 1709 | 1710 | 0.4 | RMS | 1710 | -19.84 | -13 | Pass | 4 |
| 1710 | 1730 | 1 | RMS | 1710.6 | 22.05 | 30 | Pass | 401 |

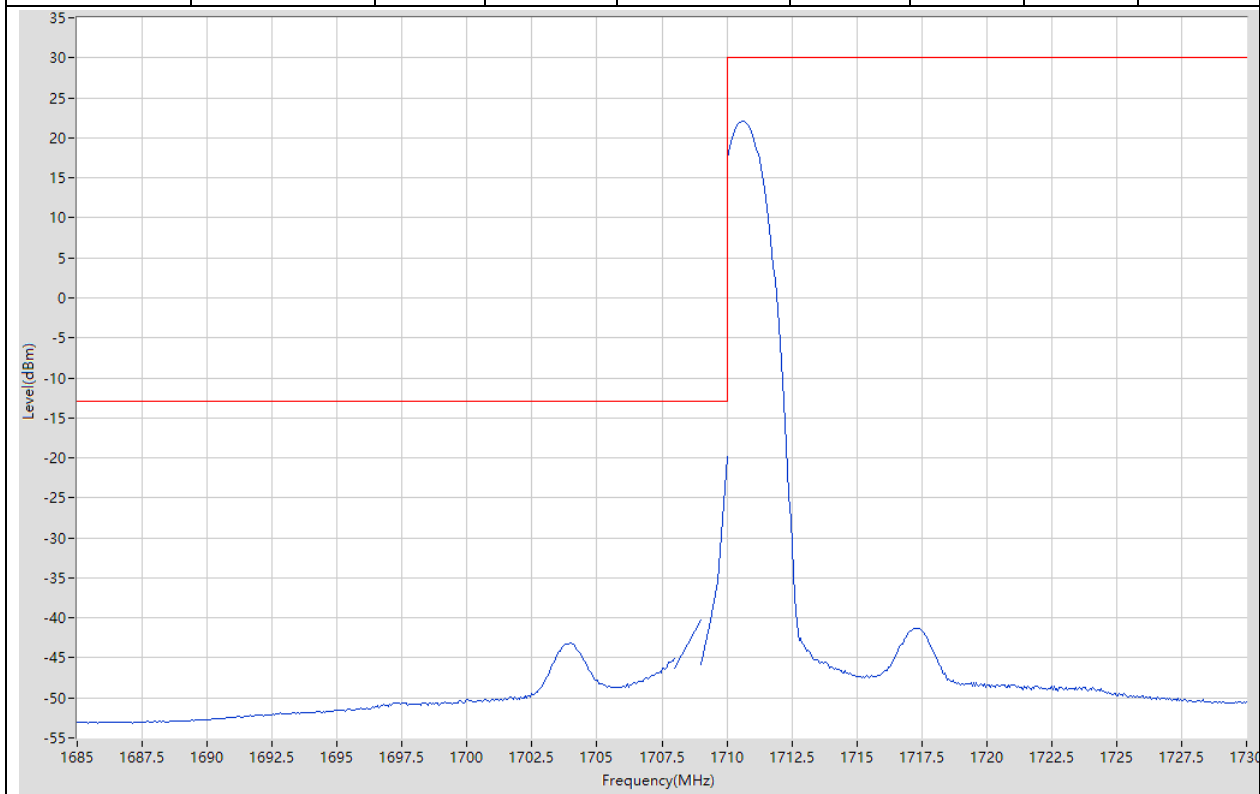


34.10. Band Edge for SA(NTNV)(Subtest:4, Channel:346000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:216, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1701.618 | -33.43 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -34.08 | -13 | Pass | 2 |
| 1709 | 1710 | 0.39 | RMS | 1710 | -32.88 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1729.85 | 6.7 | 30 | Pass | 401 |

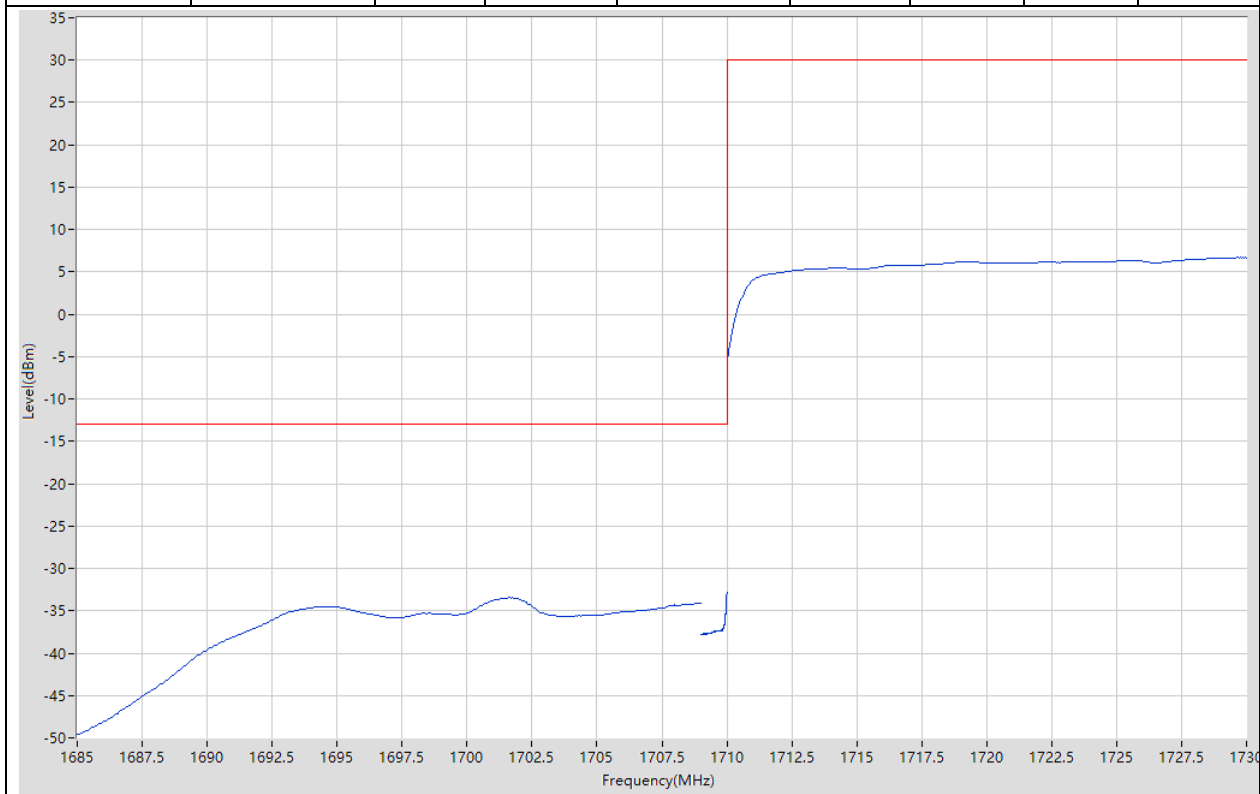

34.11. Band Edge for SA(NTNV)(Subtest:7, Channel:352000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:215)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.3 | 21.93 | 30 | Pass | 401 |
| 1780 | 1781 | 0.4 | RMS | 1780 | -20.95 | -13 | Pass | 4 |
| 1781 | 1782 | 1 | RMS | 1781 | -41.95 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1785.968 | -42.78 | -13 | Pass | 401 |

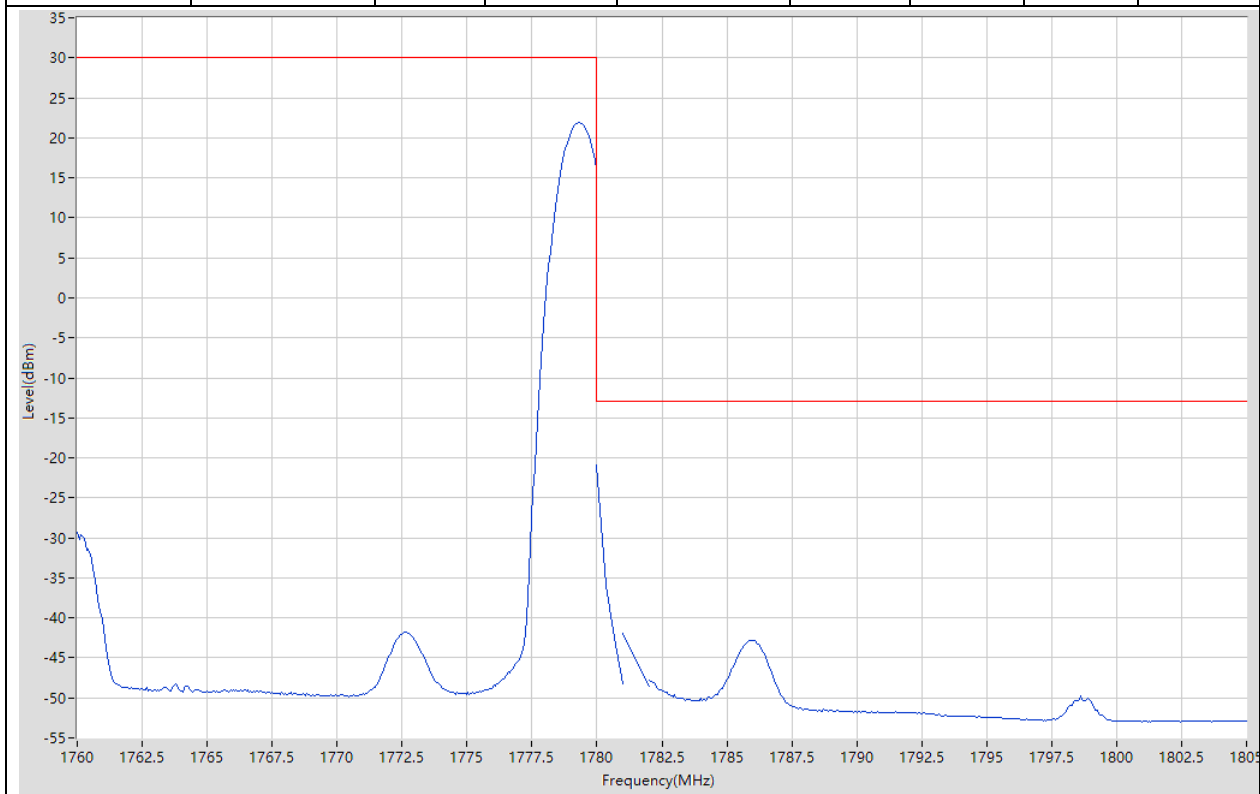


34.12. Band Edge for SA(NTNV)(Subtest:8, Channel:352000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:216, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1760.05 | 6.62 | 30 | Pass | 401 |
| 1780 | 1781 | 0.39 | RMS | 1780 | -29.75 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1782 | -27.63 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1788.038 | -26.12 | -13 | Pass | 401 |




34.13. Band Edge for SA(NTNV)(Subtest:3, Channel:342500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1708 | -41.3 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -39.99 | -13 | Pass | 2 |
| 1709 | 1710 | 0.051 | RMS | 1710 | -19.4 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1710.4 | 20.68 | 30 | Pass | 401 |

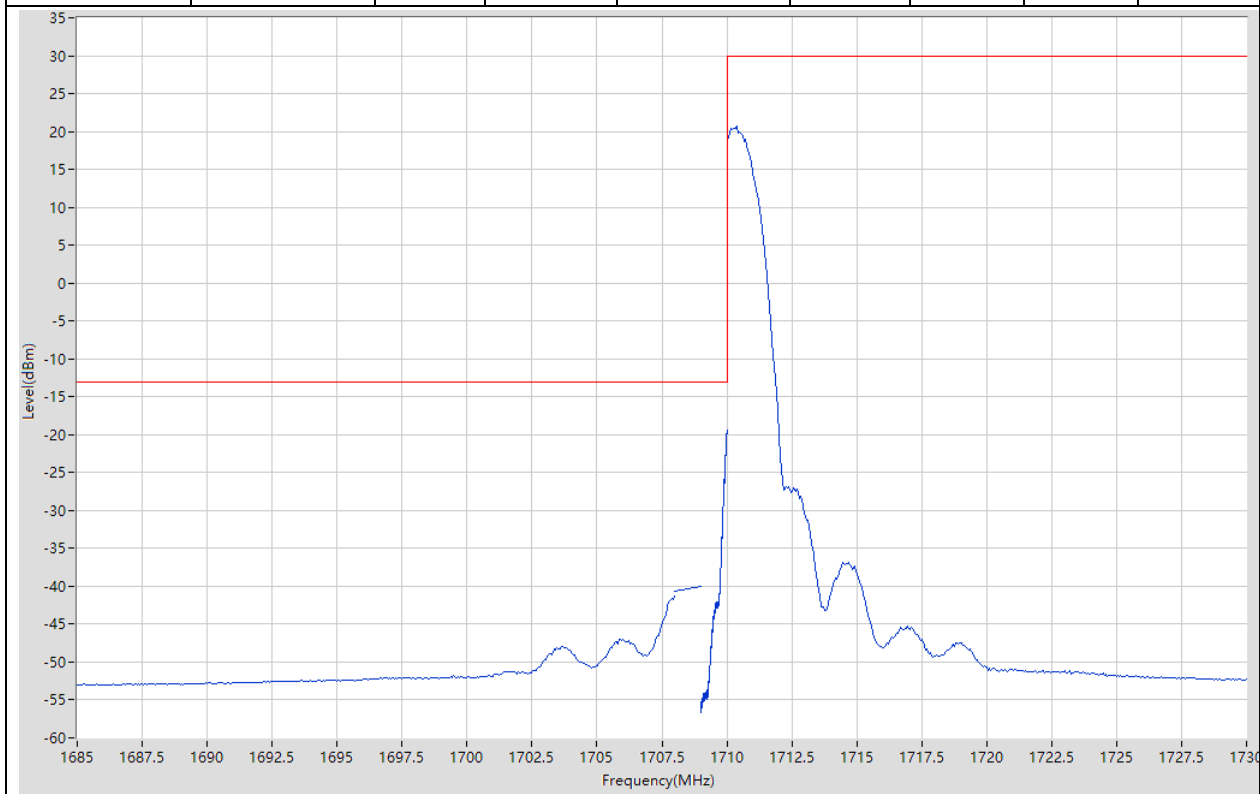


34.14. Band Edge for SA(NTNV)(Subtest:4, Channel:342500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:25, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1707.713 | -30.97 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -30.52 | -13 | Pass | 2 |
| 1709 | 1710 | 0.051 | RMS | 1709.995 | -32.61 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1712.55 | 14.6 | 30 | Pass | 401 |

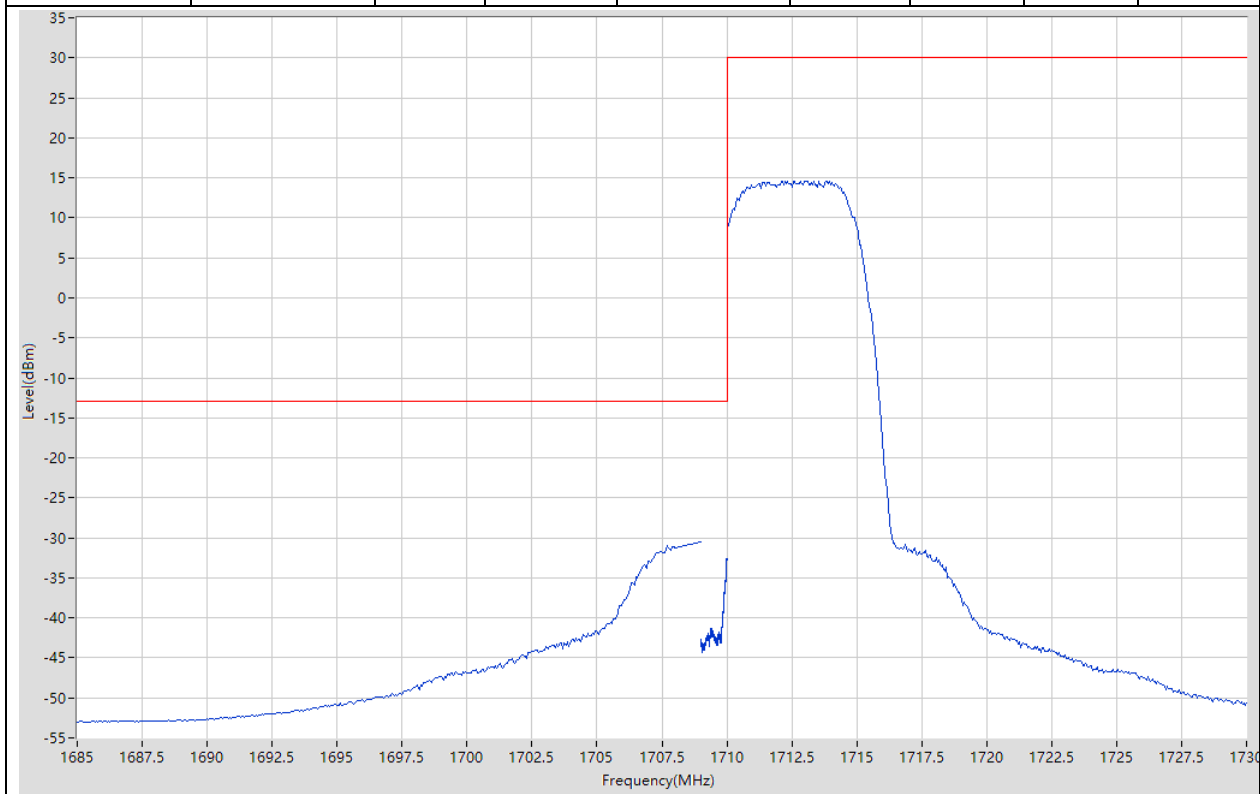


34.15. Band Edge for SA(NTNV)(Subtest:7, Channel:355500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:24)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.65 | 20.53 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780 | -18.15 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1782 | -37.98 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782.058 | -38.72 | -13 | Pass | 401 |

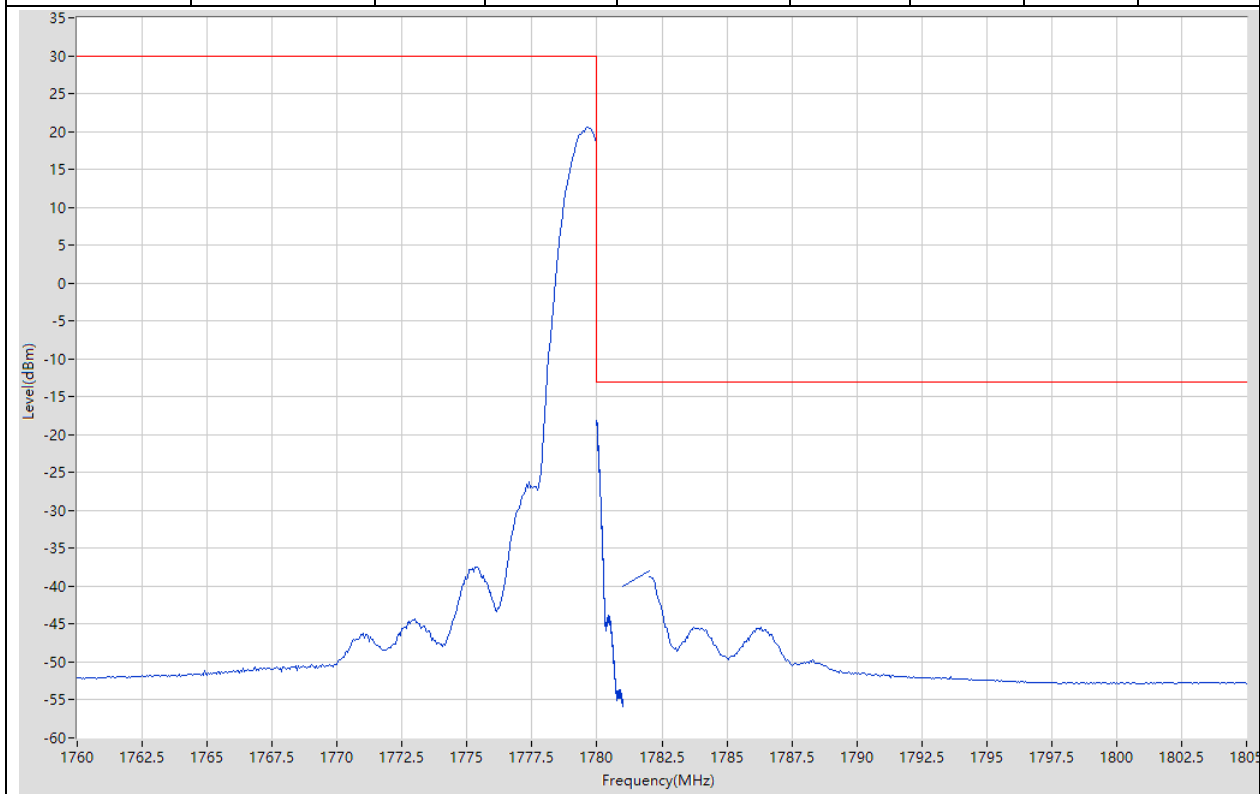


34.16. Band Edge for SA(NTNV)(Subtest:8, Channel:355500, Bandwidth:5, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:25, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1776.4 | 14.35 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780 | -31.31 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -33.49 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782.23 | -34.25 | -13 | Pass | 401 |

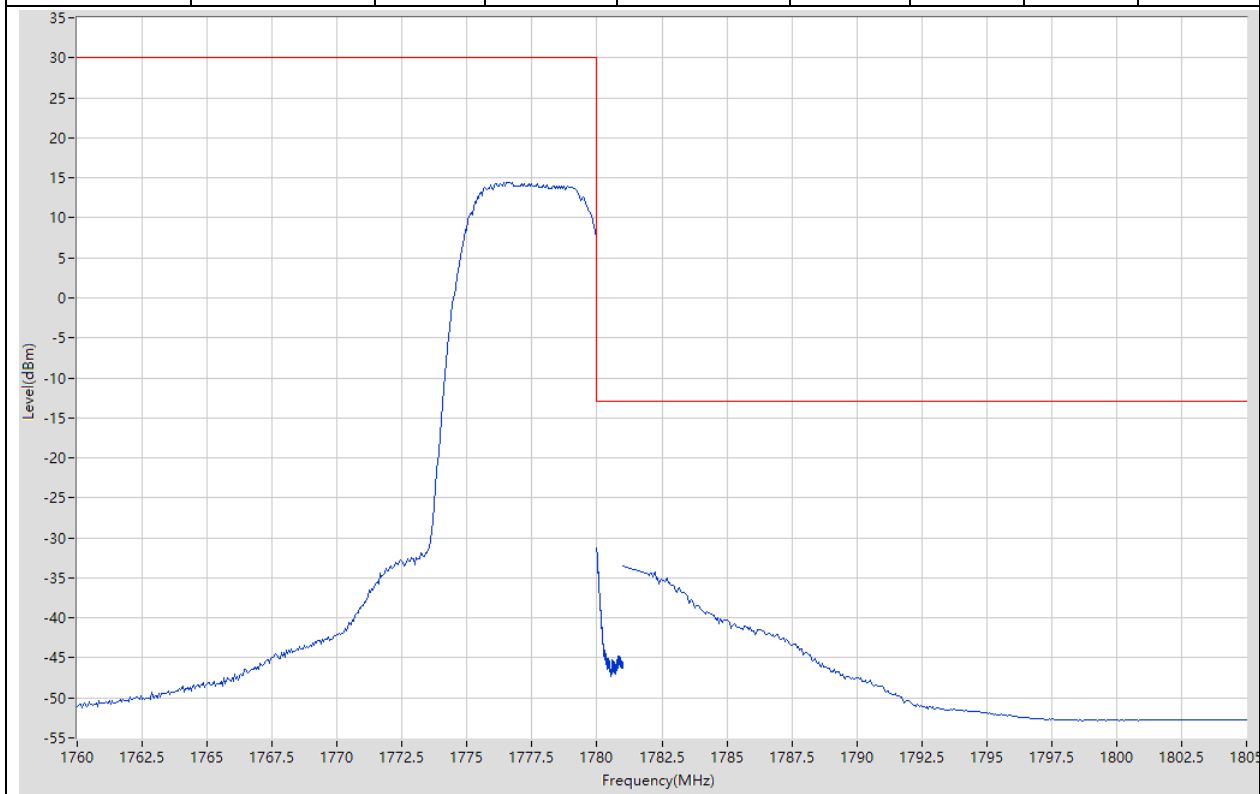


34.17. Band Edge for SA(NTNV)(Subtest:3, Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1700.985 | -40.32 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -41.82 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1710 | -20.26 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1710.5 | 20.96 | 30 | Pass | 401 |

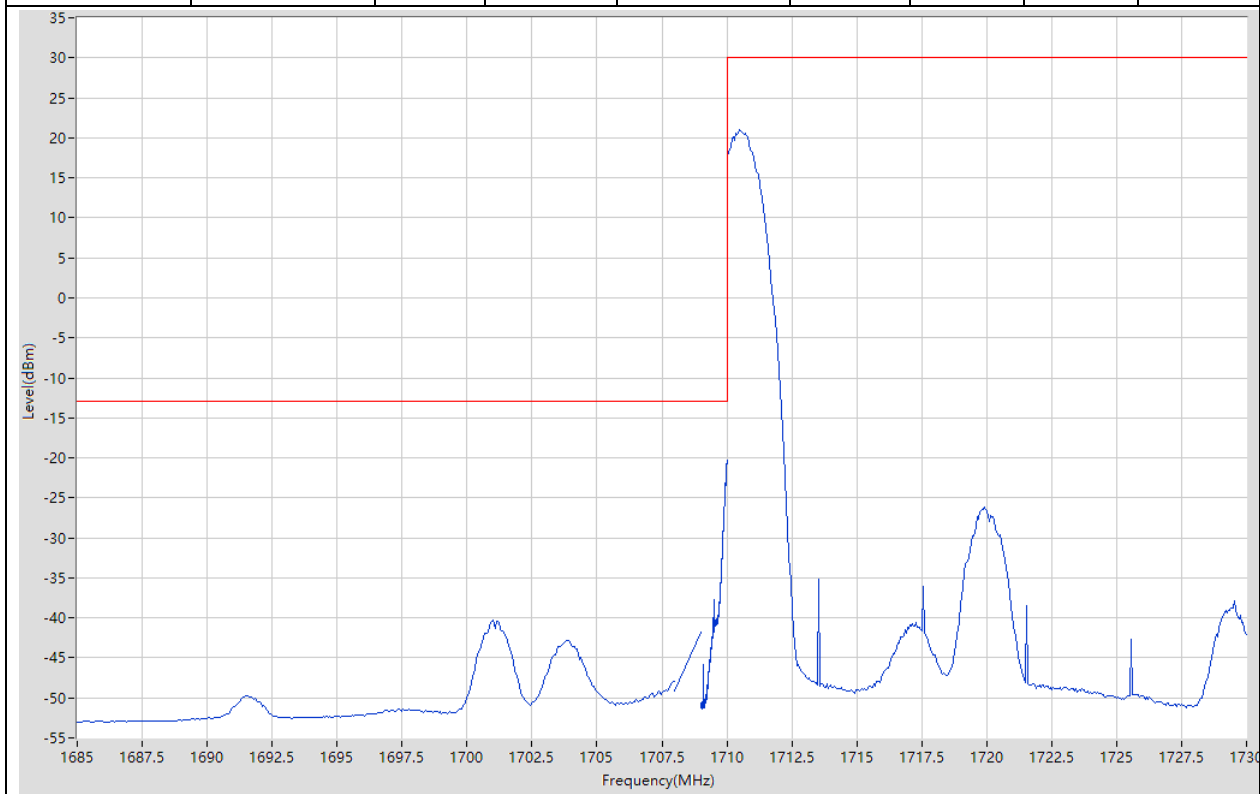


34.18. Band Edge for SA(NTNV)(Subtest:4, Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1707.885 | -30.88 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -28.87 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1709.993 | -33.41 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1720.2 | 8.96 | 30 | Pass | 401 |

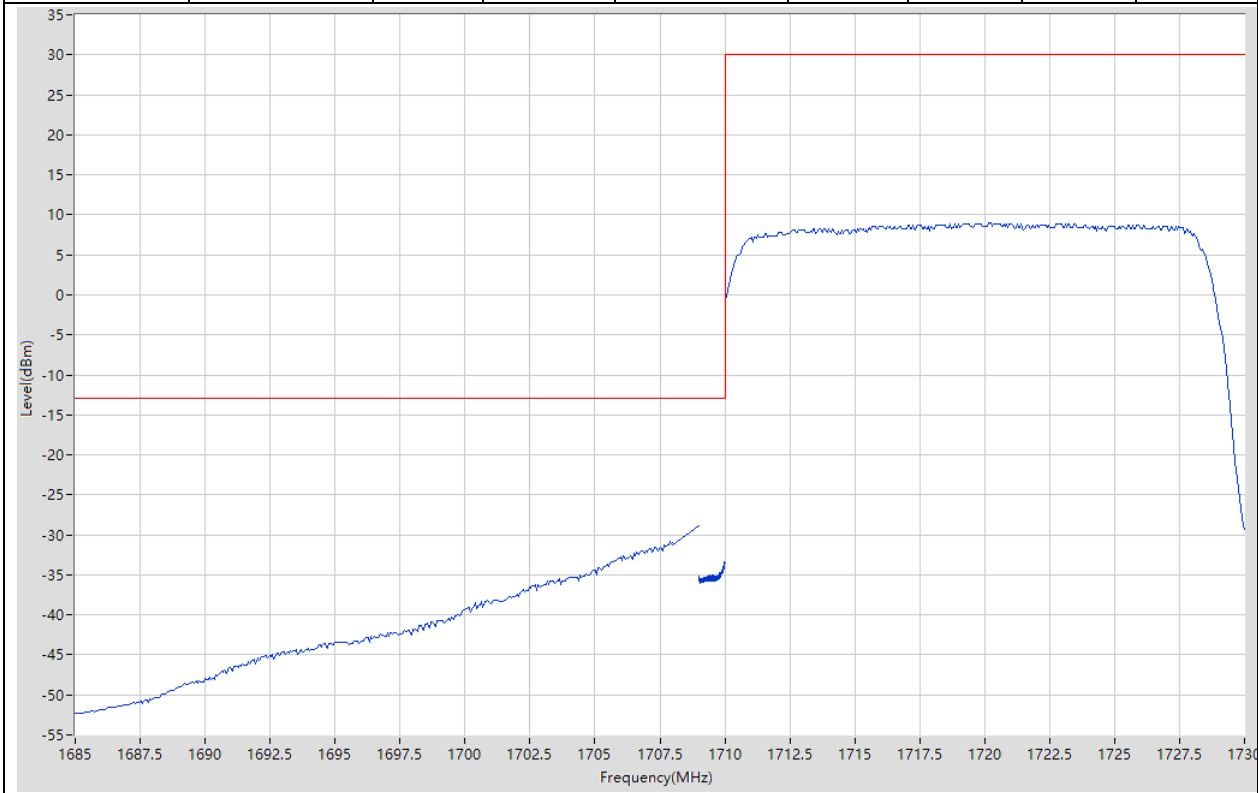


34.19. Band Edge for SA(NTNV)(Subtest:7, Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:105)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.5 | 20.49 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780 | -20.09 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -41.96 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1788.785 | -39.46 | -13 | Pass | 401 |

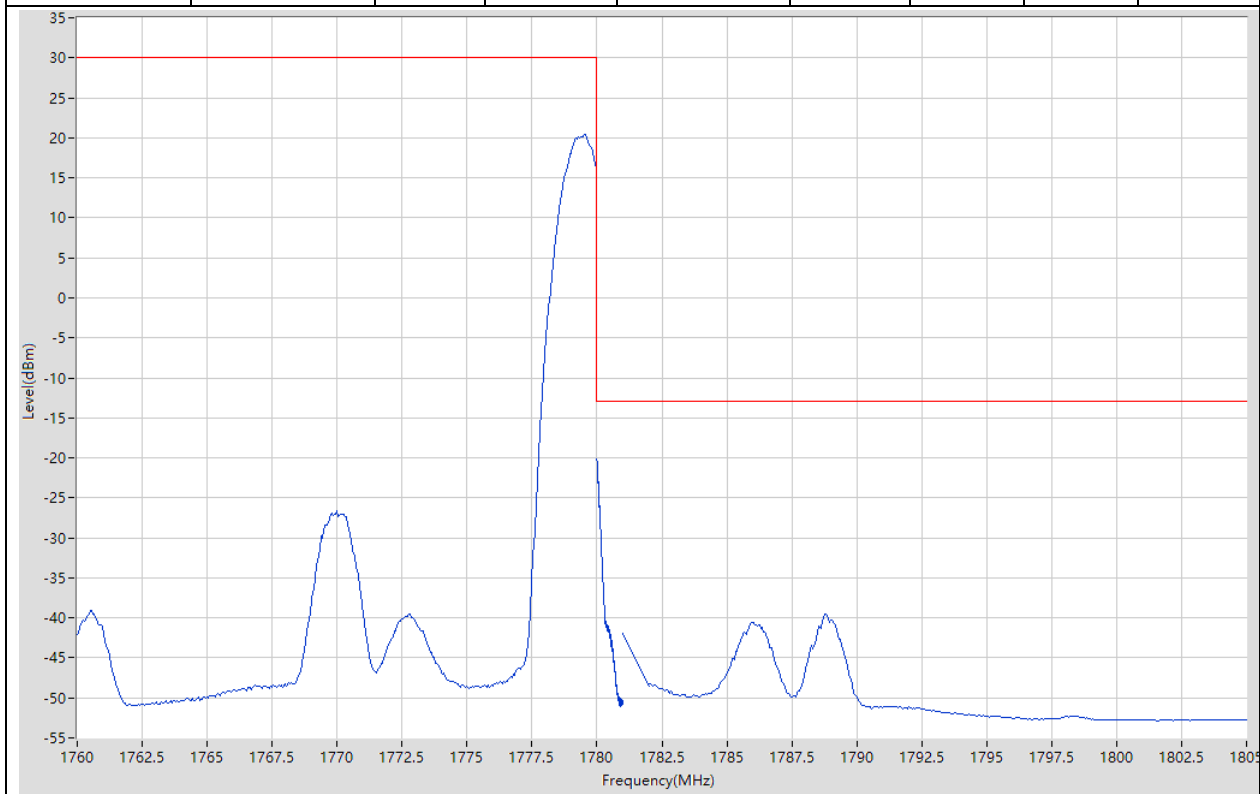


34.20. Band Edge for SA(NTNV)(Subtest:8, Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1770.2 | 8.66 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780.108 | -35.16 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -30.59 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782.058 | -30.7 | -13 | Pass | 401 |

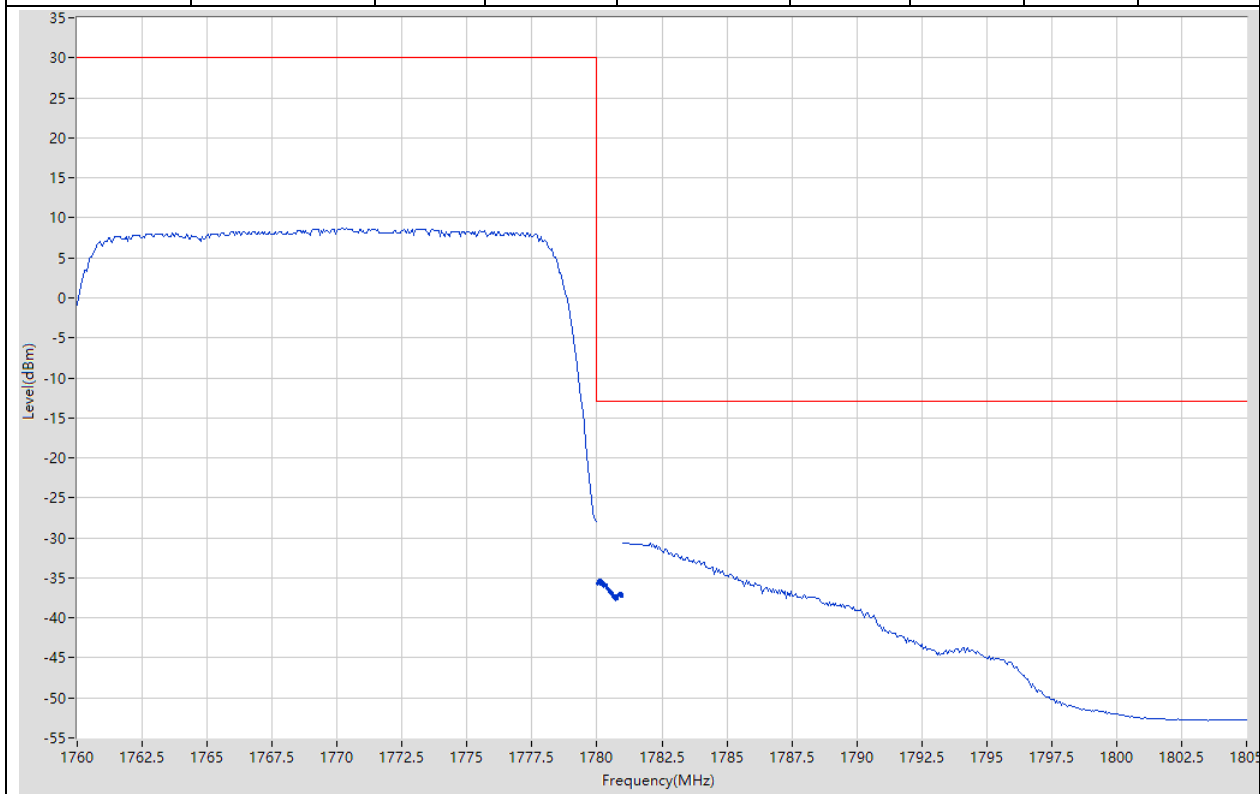


34.21. Band Edge for SA(NTNV)(Subtest:3, Channel:346000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1703.975 | -43.6 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -41 | -13 | Pass | 2 |
| 1709 | 1710 | 0.4 | RMS | 1710 | -21 | -13 | Pass | 4 |
| 1710 | 1730 | 1 | RMS | 1710.65 | 21.04 | 30 | Pass | 401 |

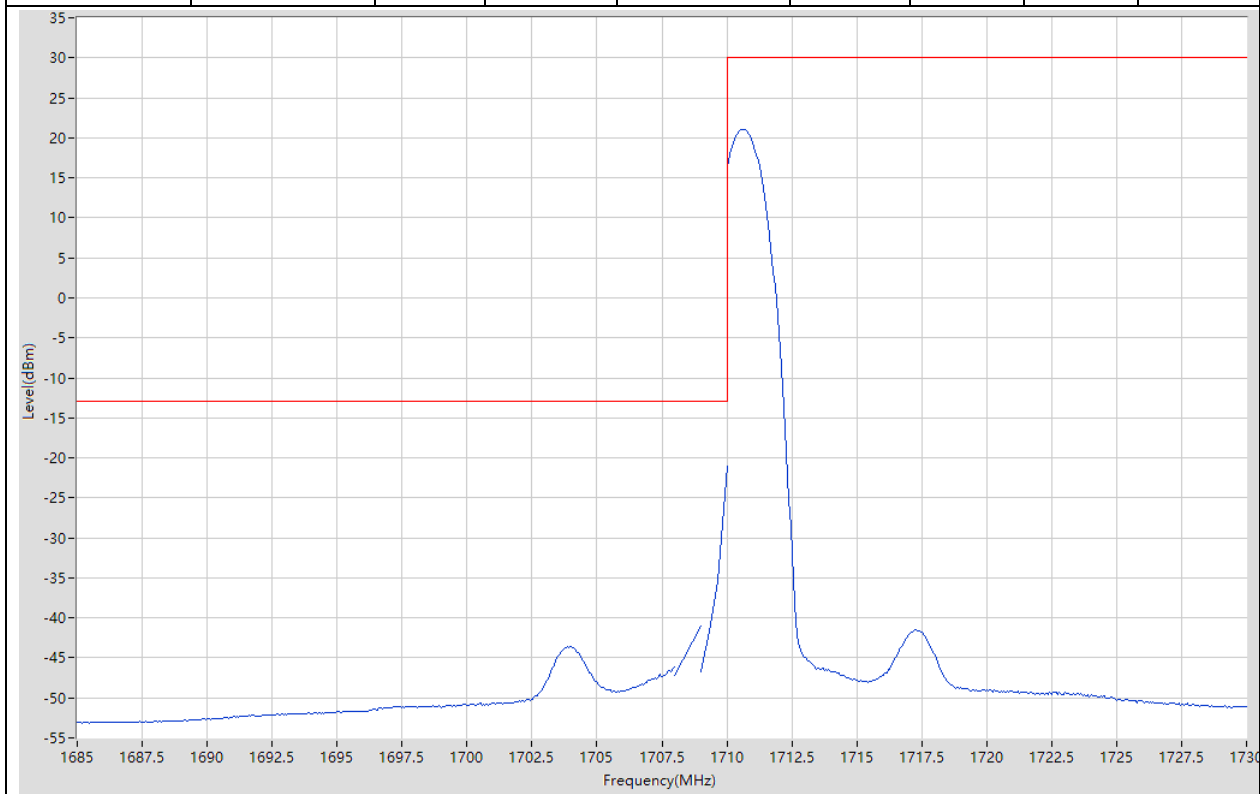


34.22. Band Edge for SA(NTNV)(Subtest:4, Channel:346000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:216, RB Position:0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1685 | 1708 | 1 | RMS | 1708 | -34.26 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -33.81 | -13 | Pass | 2 |
| 1709 | 1710 | 0.39 | RMS | 1710 | -33.08 | -13 | Pass | 401 |
| 1710 | 1730 | 1 | RMS | 1729.8 | 5.62 | 30 | Pass | 401 |

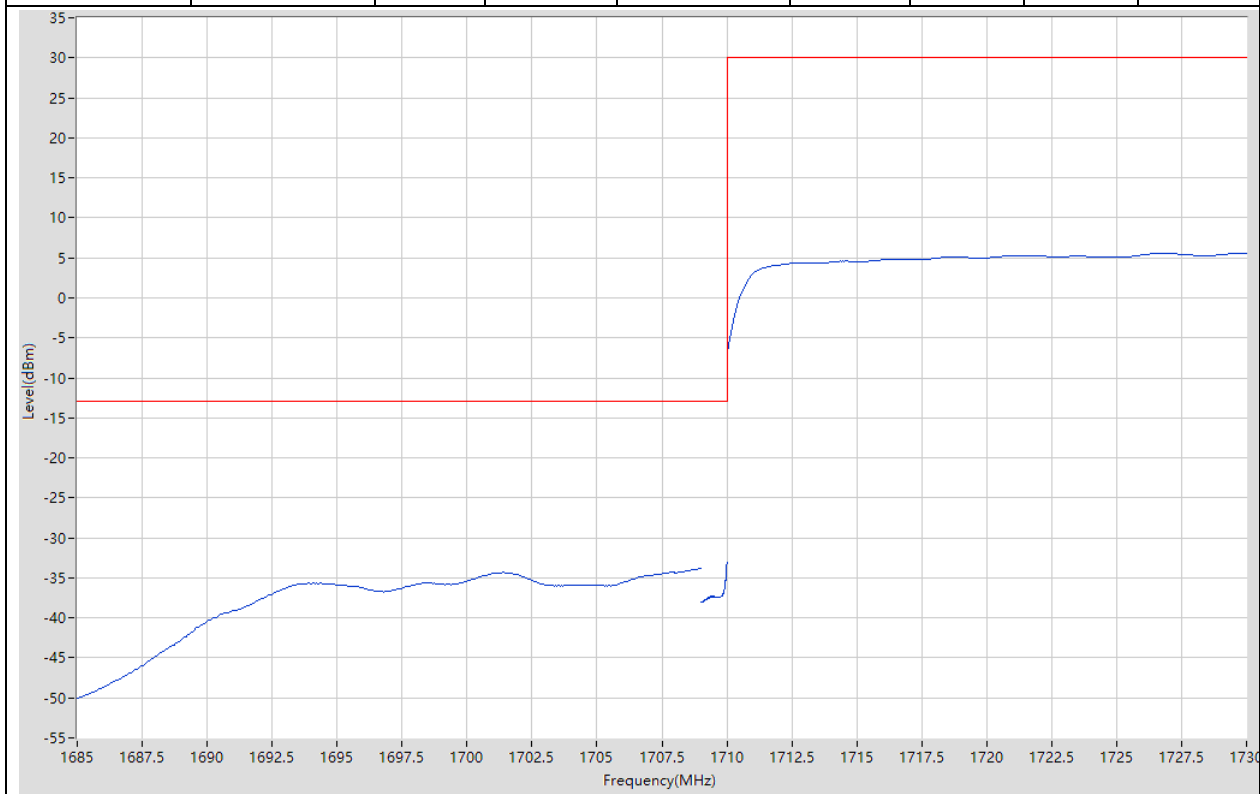


34.23. Band Edge for SA(NTNV)(Subtest:7, Channel:352000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:215)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.35 | 20.76 | 30 | Pass | 401 |
| 1780 | 1781 | 0.4 | RMS | 1780 | -21.77 | -13 | Pass | 4 |
| 1781 | 1782 | 1 | RMS | 1781 | -42.96 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1785.968 | -43.75 | -13 | Pass | 401 |

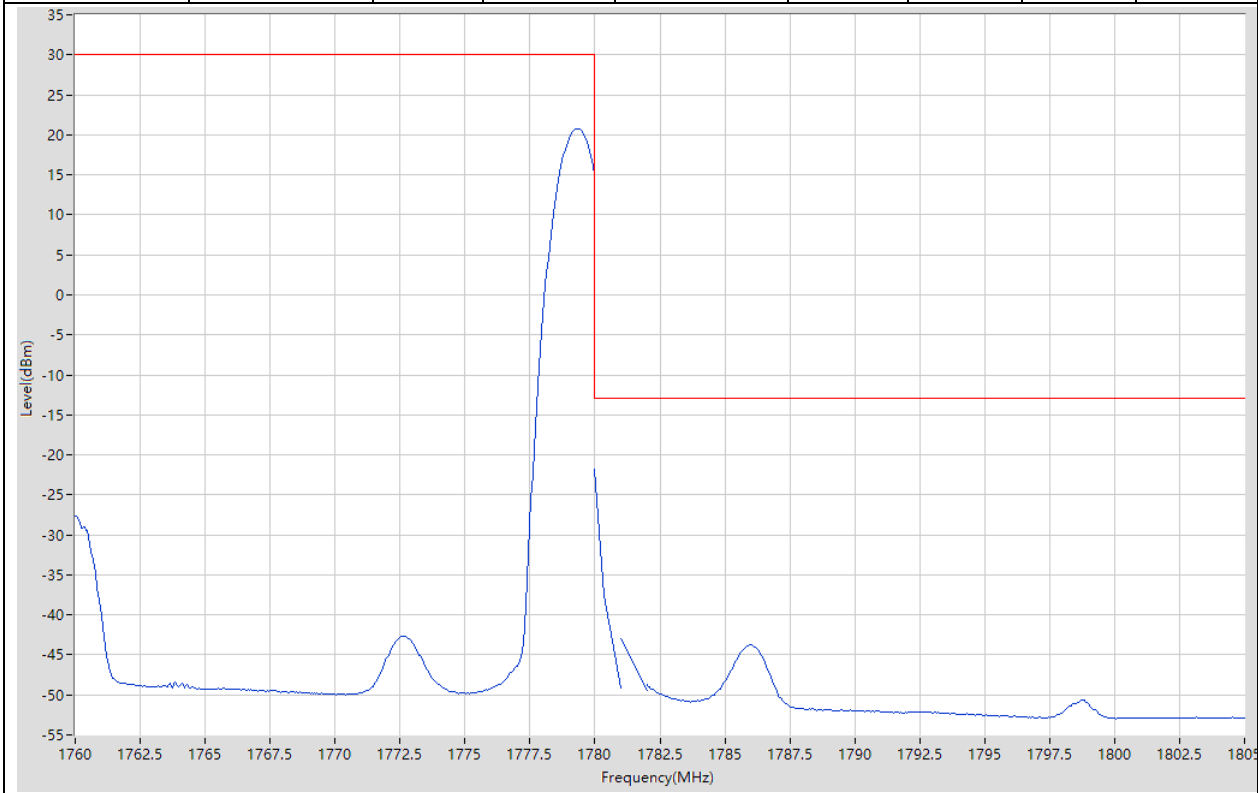

34.24. Band Edge for SA(NTNV)(Subtest:8, Channel:352000, Bandwidth:40, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:216, RB Position:0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1766.9 | 5.64 | 30 | Pass | 401 |
| 1780 | 1781 | 0.39 | RMS | 1780 | -31.22 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1782 | -29.56 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1787.865 | -28.87 | -13 | Pass | 401 |

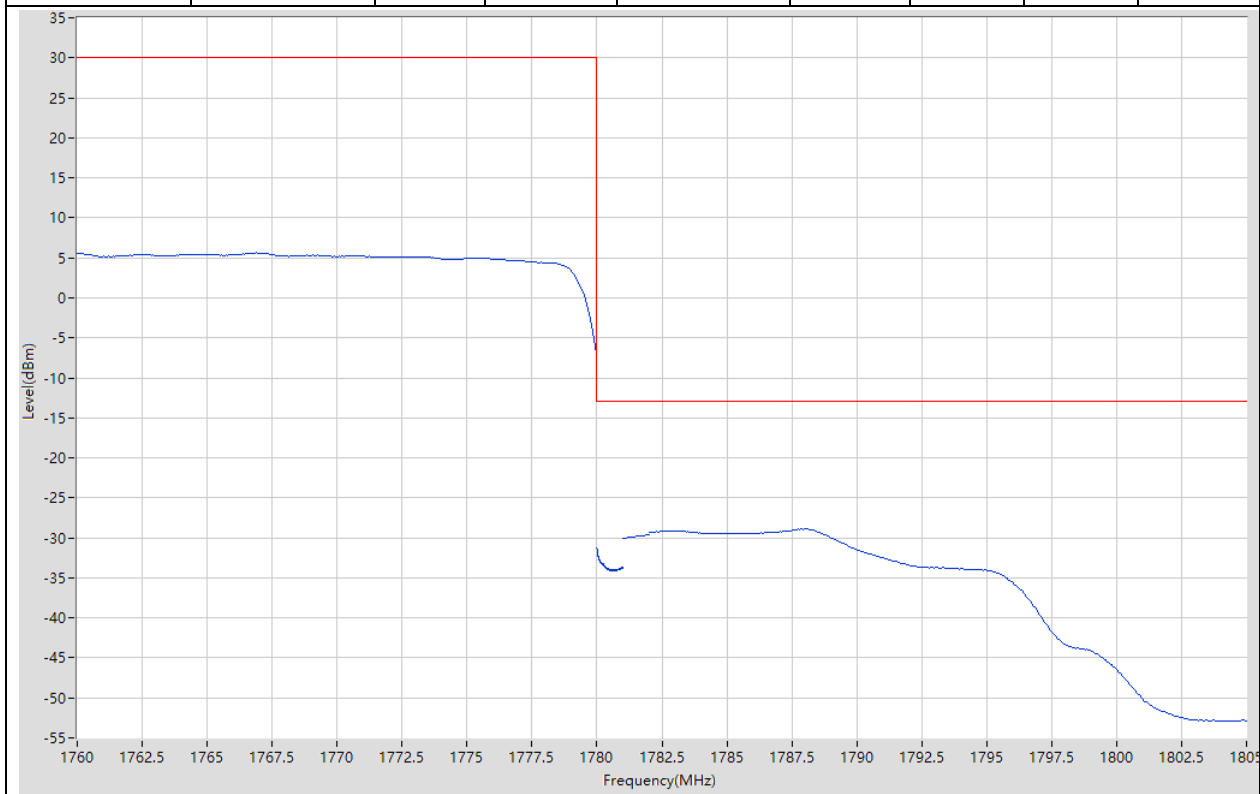

35. DC_5A_n7A_SCS15


35.1. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2494 | -45.53 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2494.215 | -45.14 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -36.8 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -16.36 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.3 | 21.5 | 30 | Pass | 401 |

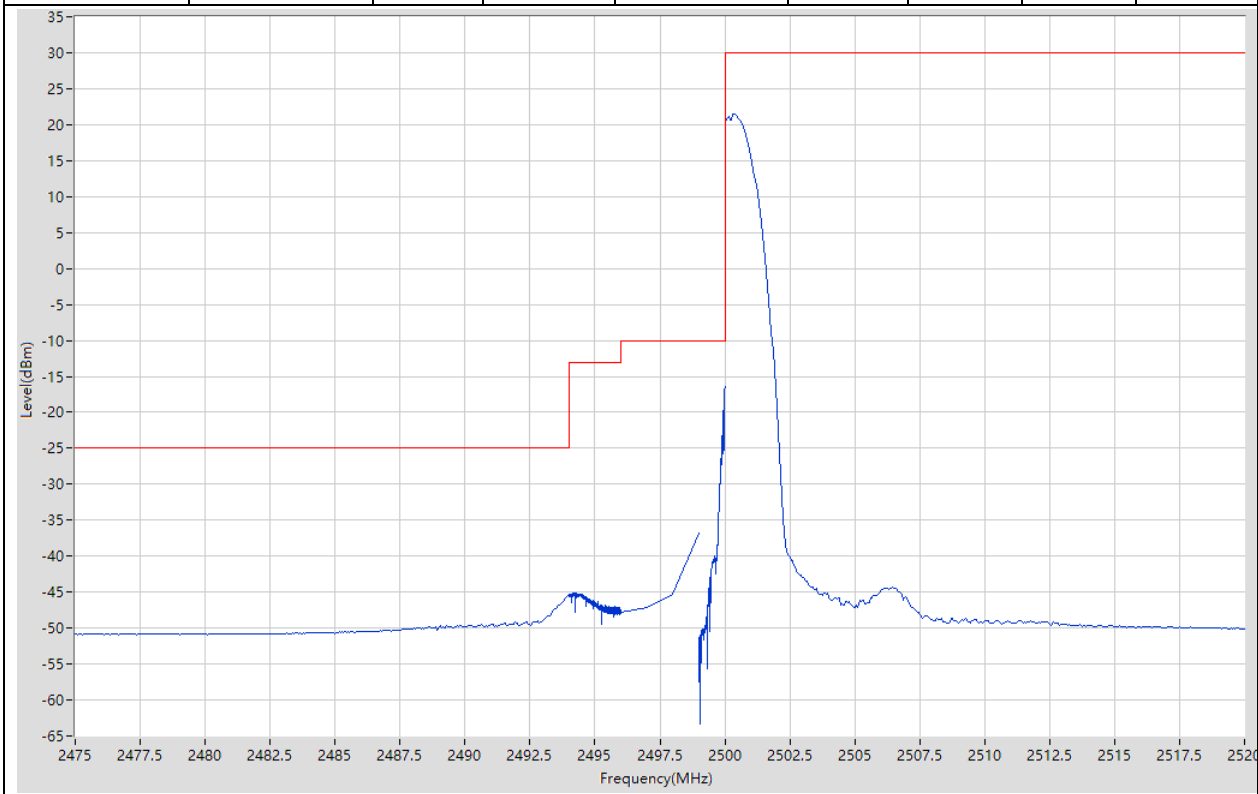


35.2. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2493.62 | -38.97 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2495.955 | -38.38 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -31.41 | -10 | Pass | 4 |
| 2499 | 2500 | 0.1 | RMS | 2500 | -26.5 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2503.85 | 15.18 | 30 | Pass | 401 |

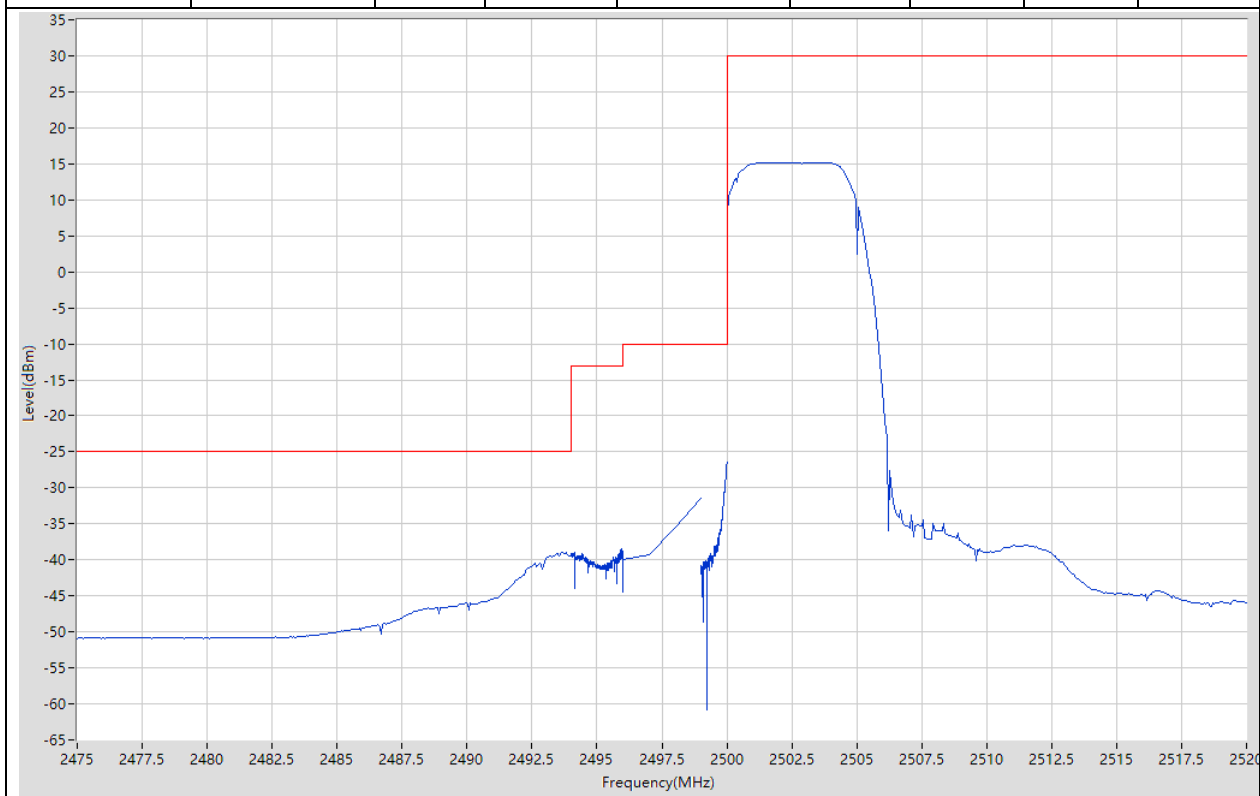


35.3. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1 @24, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.6 | 21.34 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570 | -19.1 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -37.95 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.738 | -44.58 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576 | -45.21 | -25 | Pass | 401 |

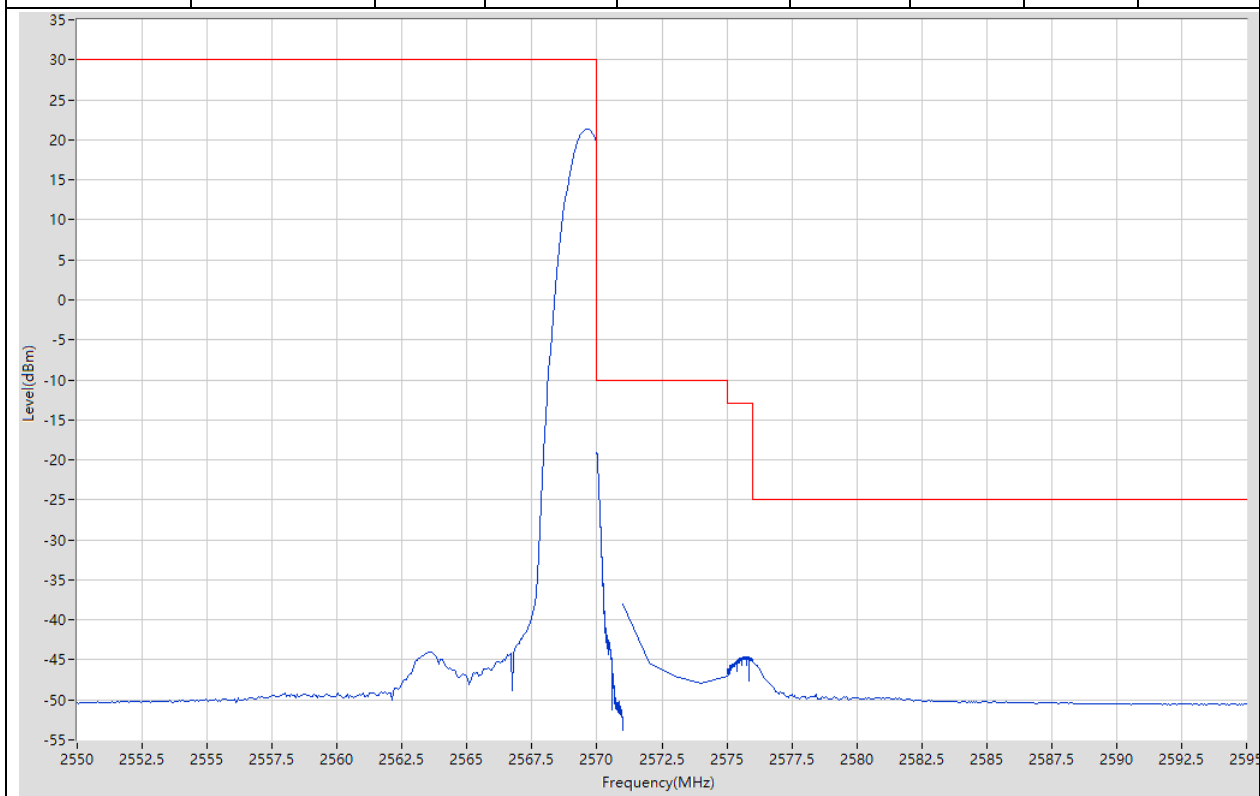


35.4. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2568.6 | 14.97 | 30 | Pass | 401 |
| 2570 | 2571 | 0.1 | RMS | 2570 | -25.8 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -32.6 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.953 | -37.85 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576 | -37.37 | -25 | Pass | 401 |

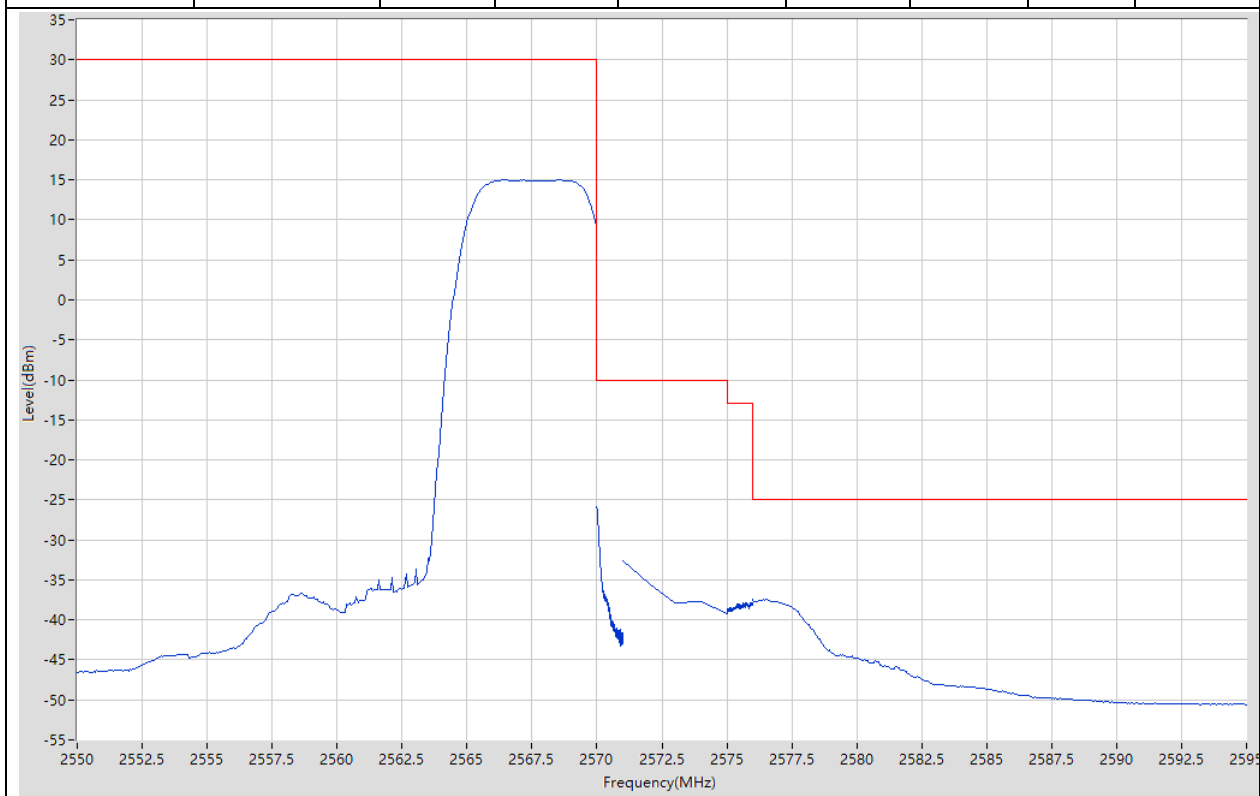


35.5. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2484.925 | -50.49 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2494.378 | -42.77 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -36.88 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -21.97 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.45 | 21.72 | 30 | Pass | 401 |

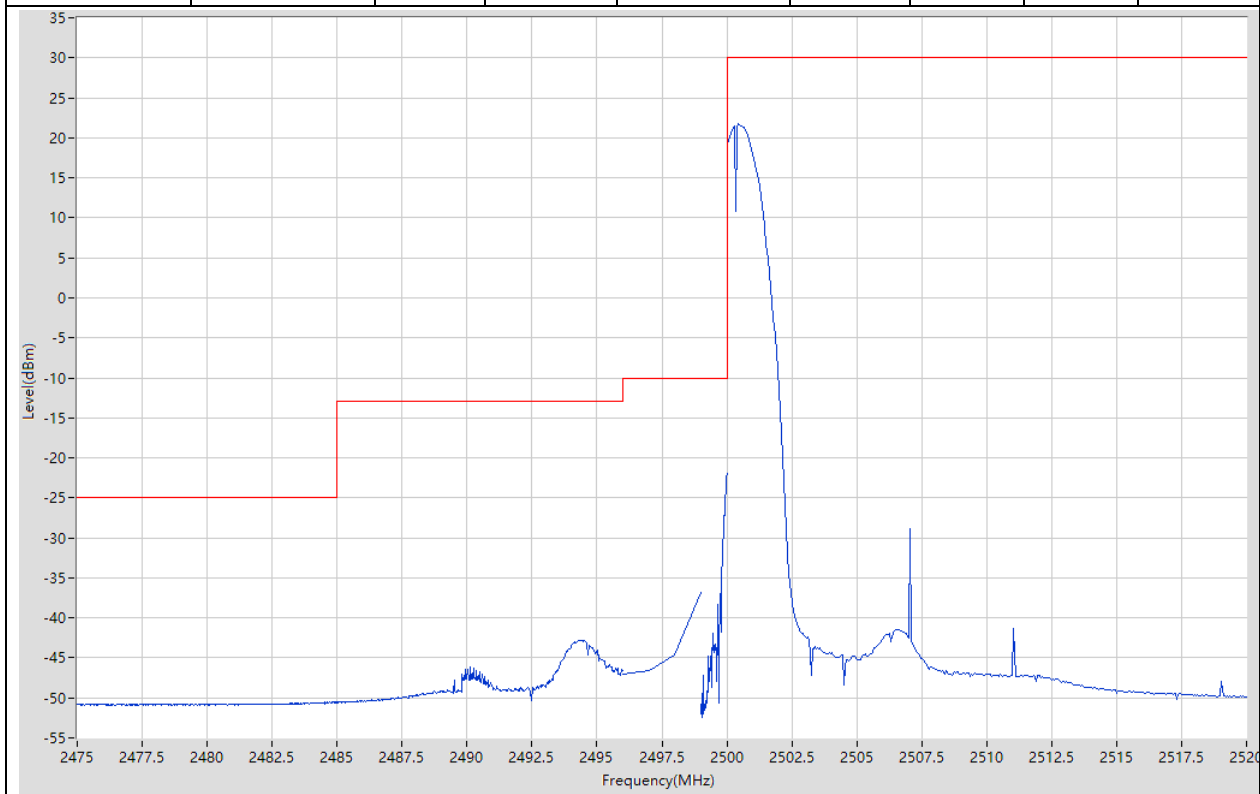


35.6. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:75@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2485 | -46.31 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2495.973 | -35.6 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -31.09 | -10 | Pass | 4 |
| 2499 | 2500 | 0.3 | RMS | 2500 | -24.39 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2512.05 | 10.77 | 30 | Pass | 401 |

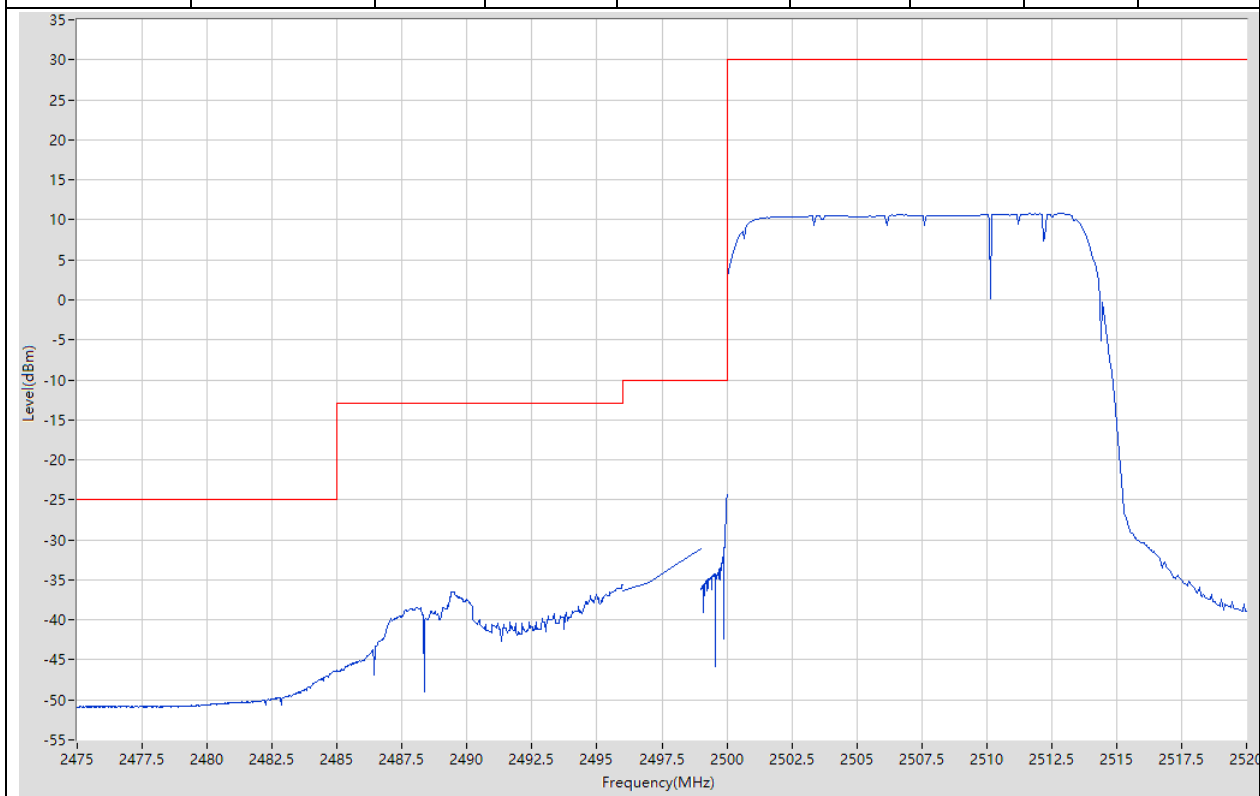


35.7. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@78, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.5 | 21.66 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570 | -24.22 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -38 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2575.625 | -42.2 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2585.1 | -50.09 | -25 | Pass | 401 |

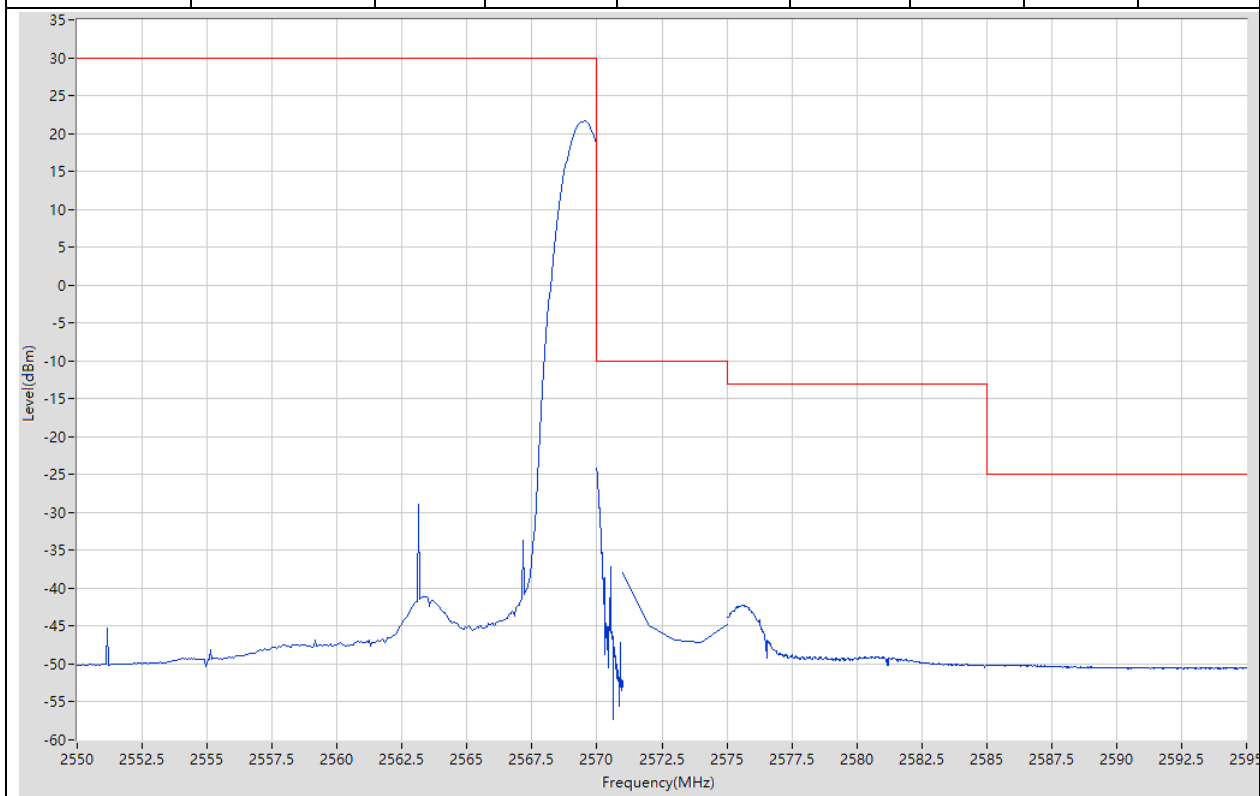


35.8. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:75@0, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2561.6 | 10.54 | 30 | Pass | 401 |
| 2570 | 2571 | 0.3 | RMS | 2570.103 | -33.63 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -30.84 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2578.925 | -37.18 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2587.3 | -43.86 | -25 | Pass | 401 |

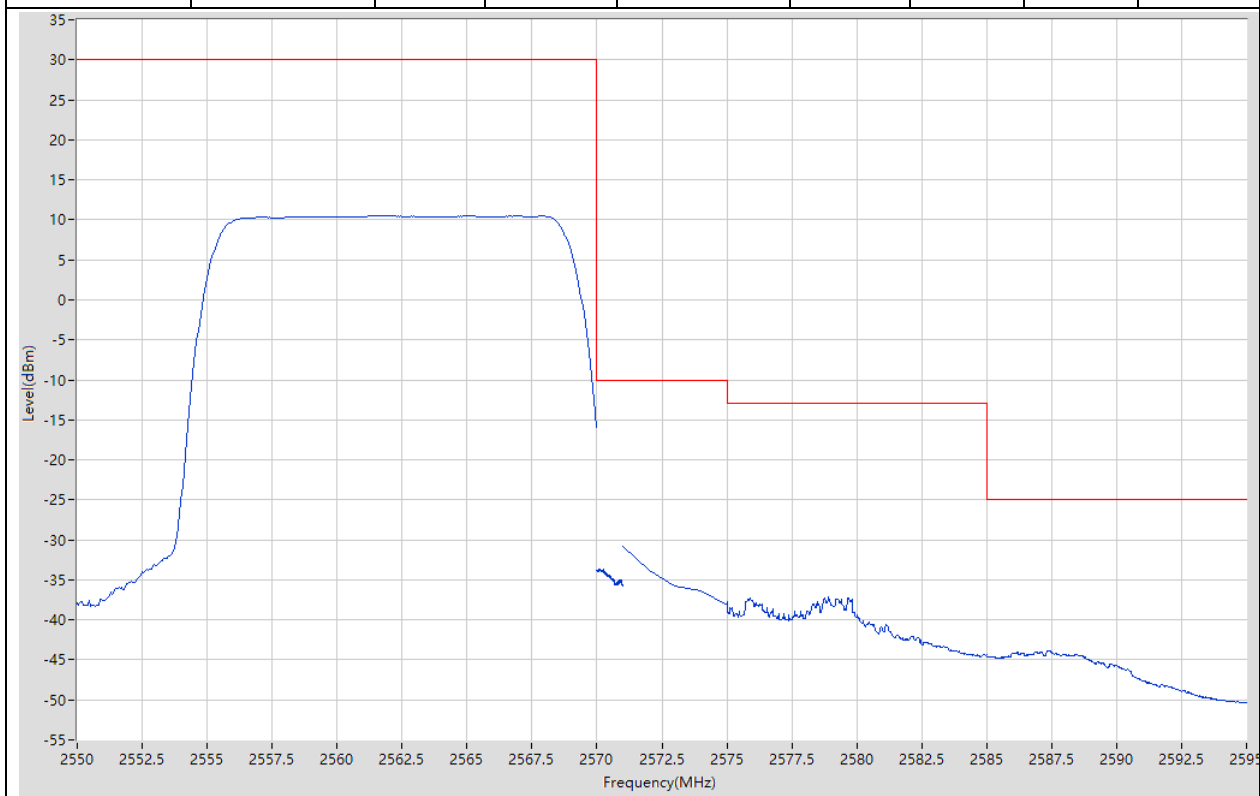


35.9. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2475.413 | -50.78 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2494.6 | -41.18 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -37.25 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -25.24 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.5 | 21.62 | 30 | Pass | 401 |

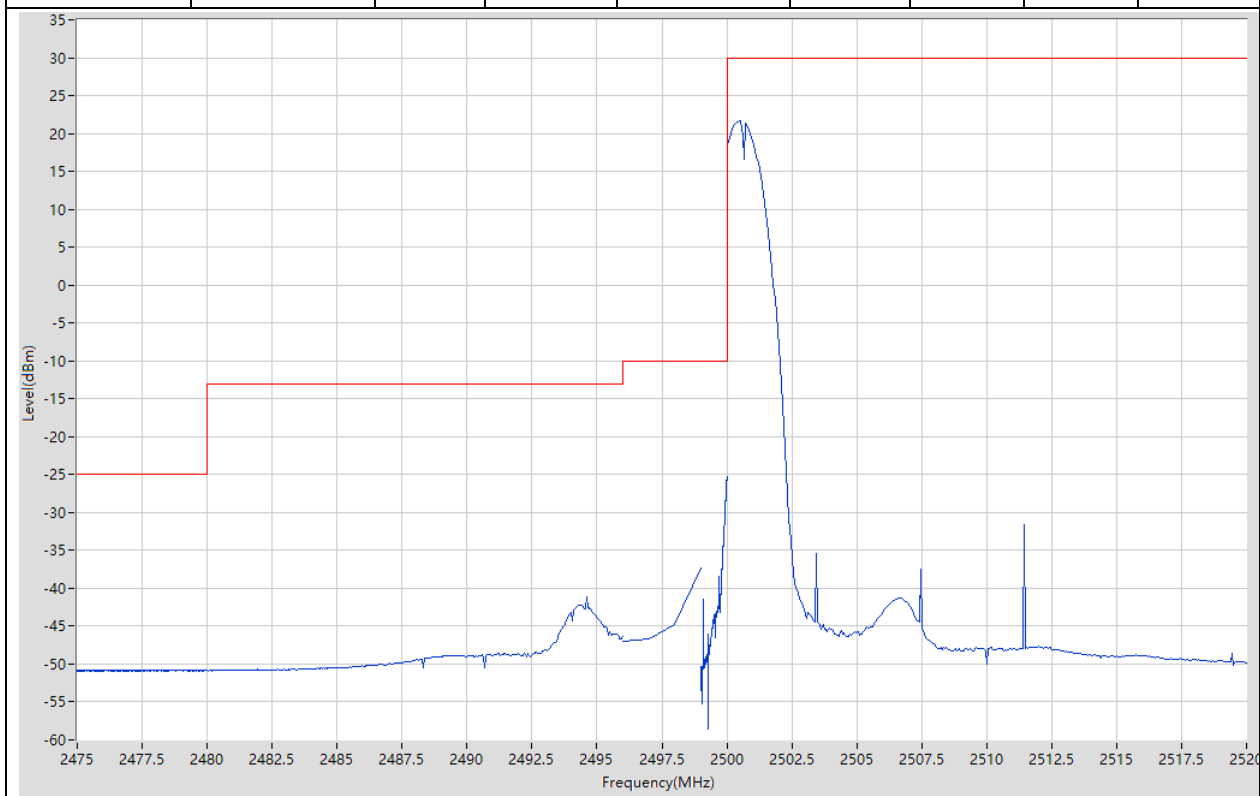


35.10. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2479.975 | -50.68 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2495.96 | -33.66 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -30.01 | -10 | Pass | 4 |
| 2499 | 2500 | 0.39 | RMS | 2500 | -21.37 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2514.85 | 9.74 | 30 | Pass | 401 |

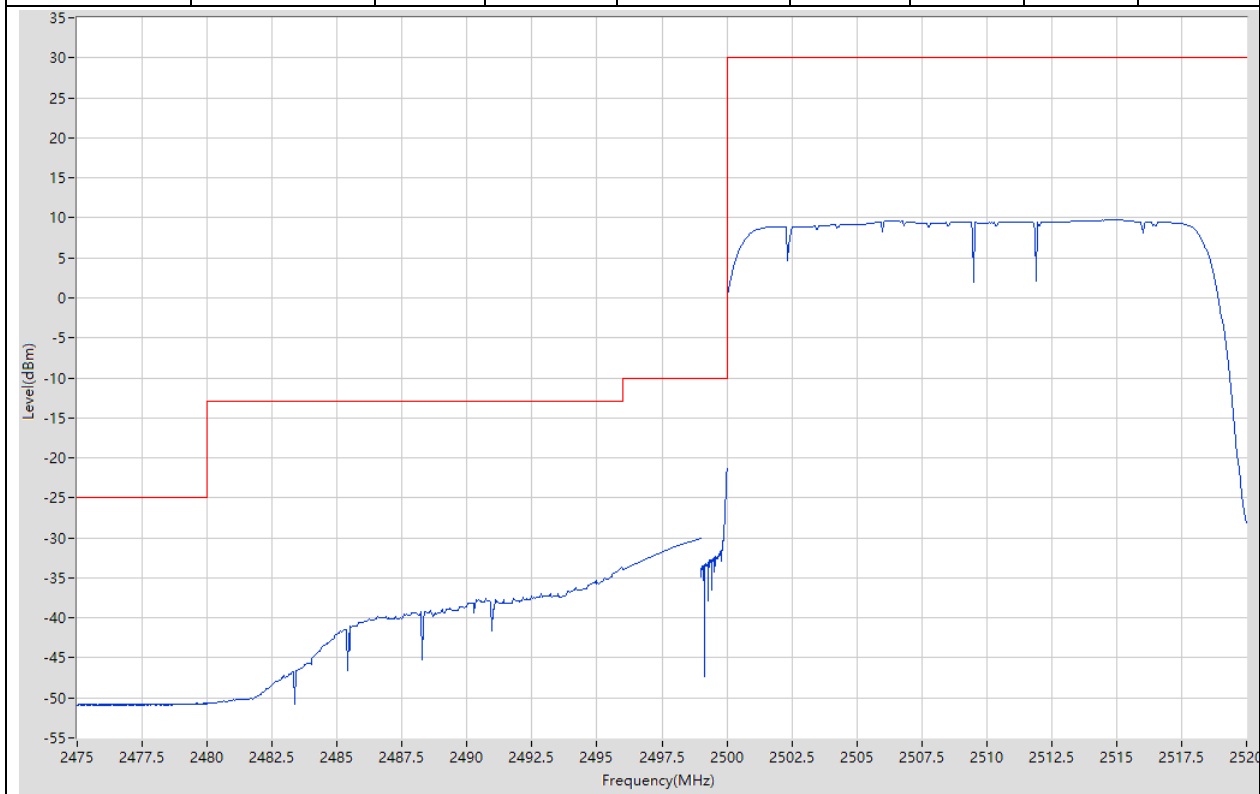


35.11. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@105, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.45 | 21.56 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570 | -27.47 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -37.95 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575.6 | -41.23 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590.538 | -50.41 | -25 | Pass | 401 |

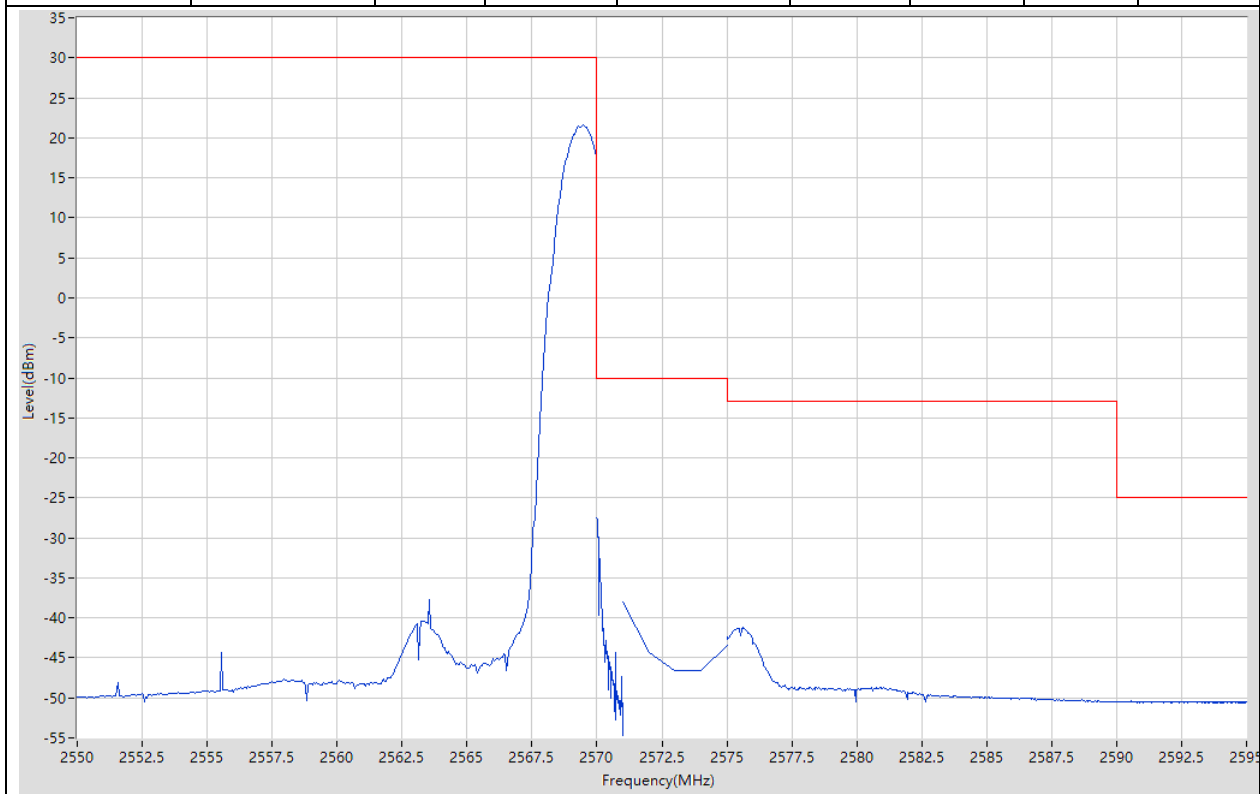


35.12. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2556.2 | 9.63 | 30 | Pass | 401 |
| 2570 | 2571 | 0.39 | RMS | 2570.005 | -31.75 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -29.74 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575.3 | -35.97 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590 | -47.56 | -25 | Pass | 401 |

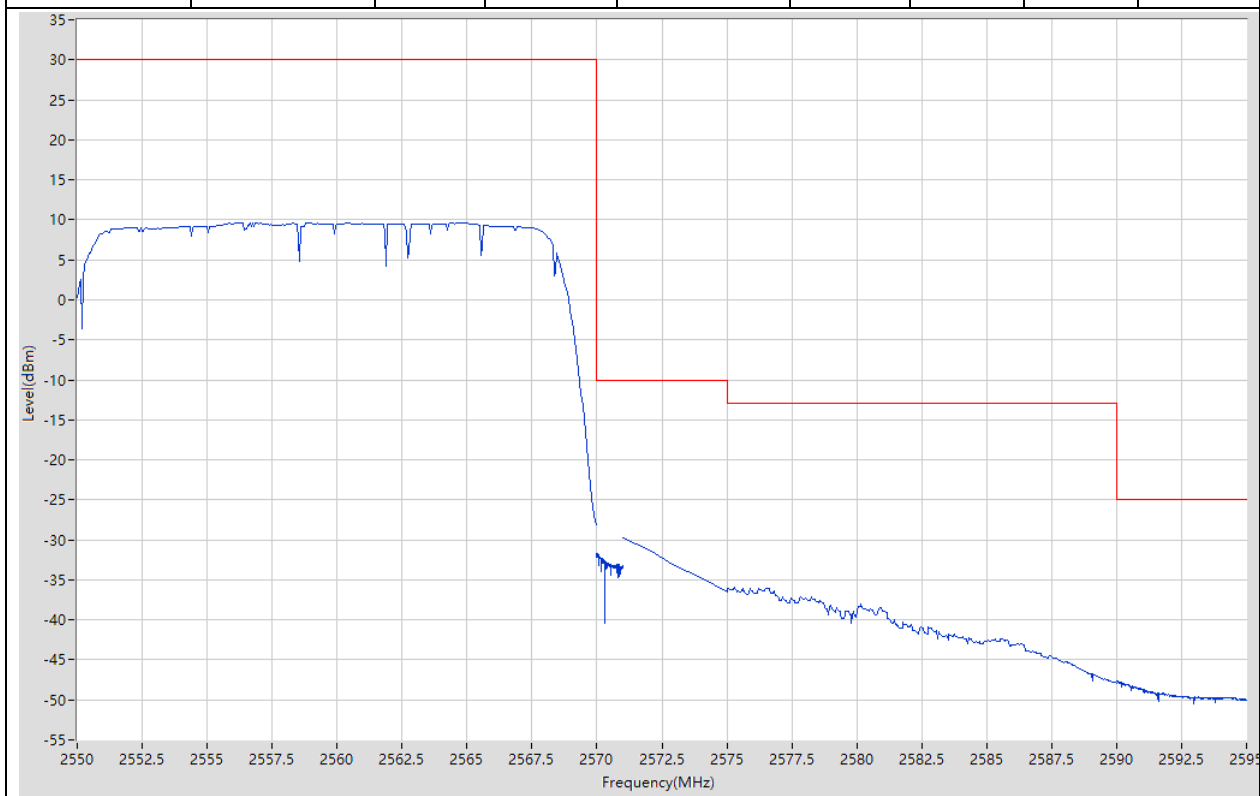


35.13. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2493.81 | -44.39 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2494.005 | -44.44 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -37.79 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -19.48 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.3 | 20.55 | 30 | Pass | 401 |

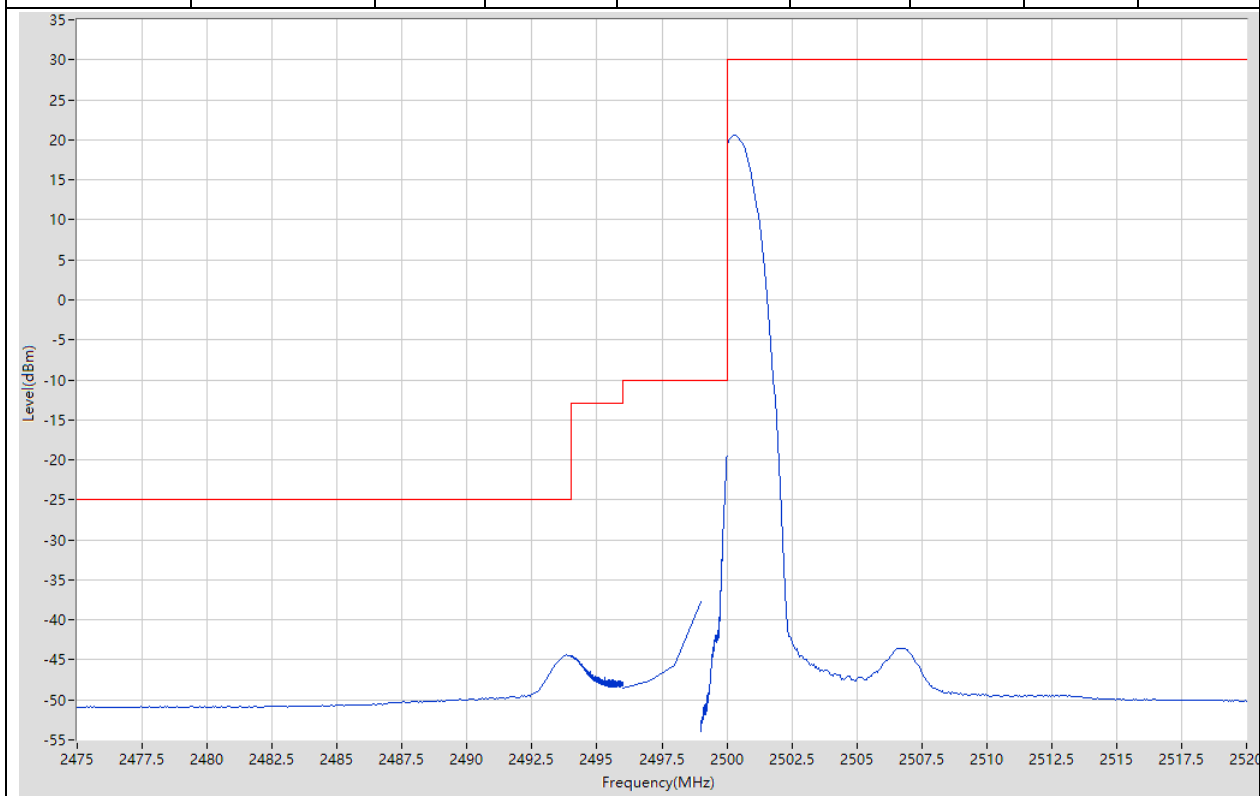


35.14. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2493.81 | -39.77 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2495.97 | -38.71 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -31.86 | -10 | Pass | 4 |
| 2499 | 2500 | 0.1 | RMS | 2500 | -27.07 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2501.55 | 14.31 | 30 | Pass | 401 |

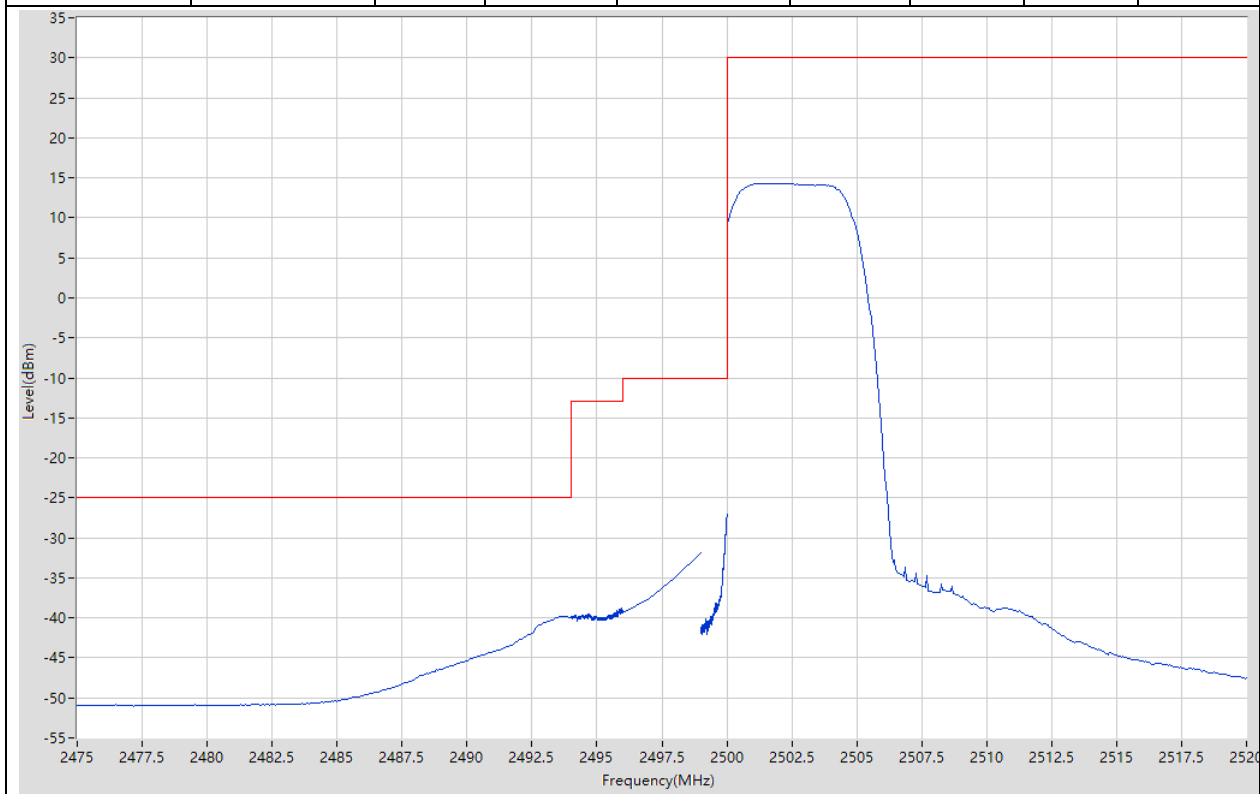


35.15. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@24, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.6 | 20.21 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570.003 | -18.96 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -38.54 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.993 | -45.68 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576 | -45.75 | -25 | Pass | 401 |

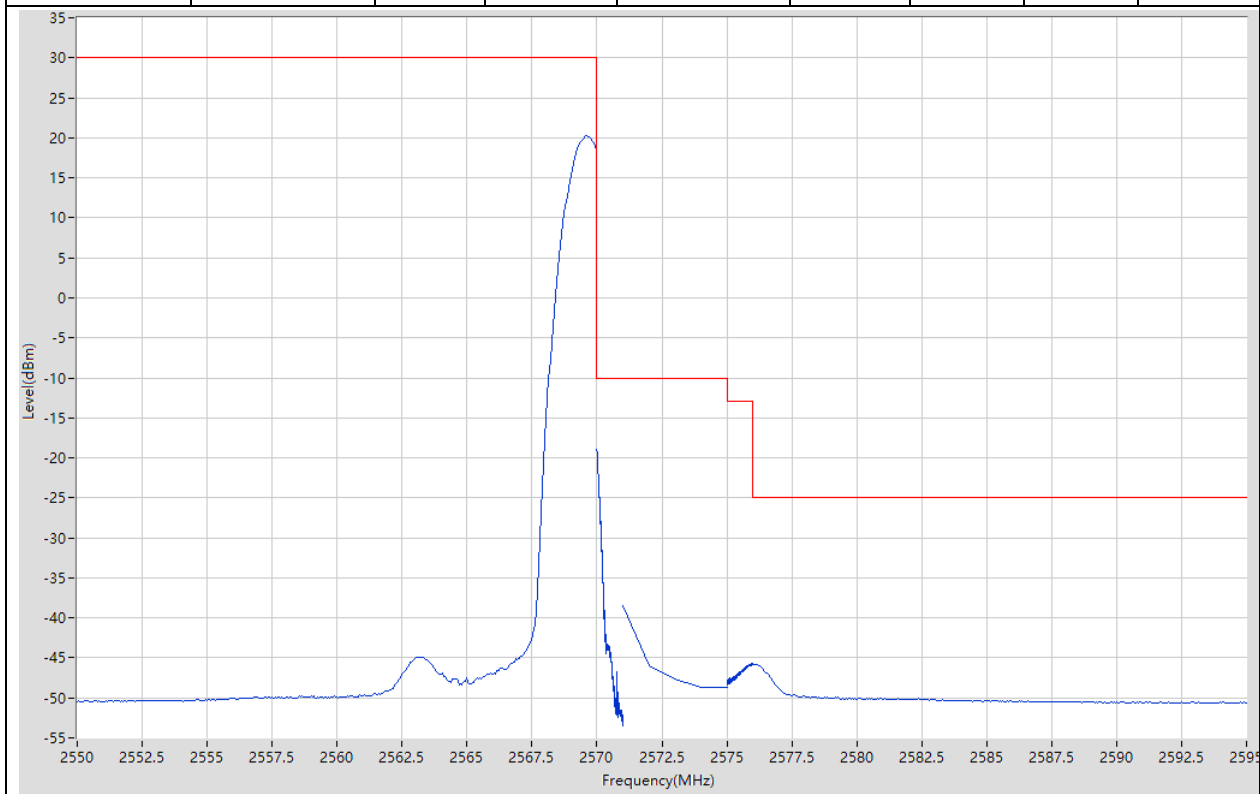


35.16. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2566.6 | 14.05 | 30 | Pass | 401 |
| 2570 | 2571 | 0.1 | RMS | 2570 | -28.53 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -33.3 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.163 | -38.58 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576.285 | -39.44 | -25 | Pass | 401 |

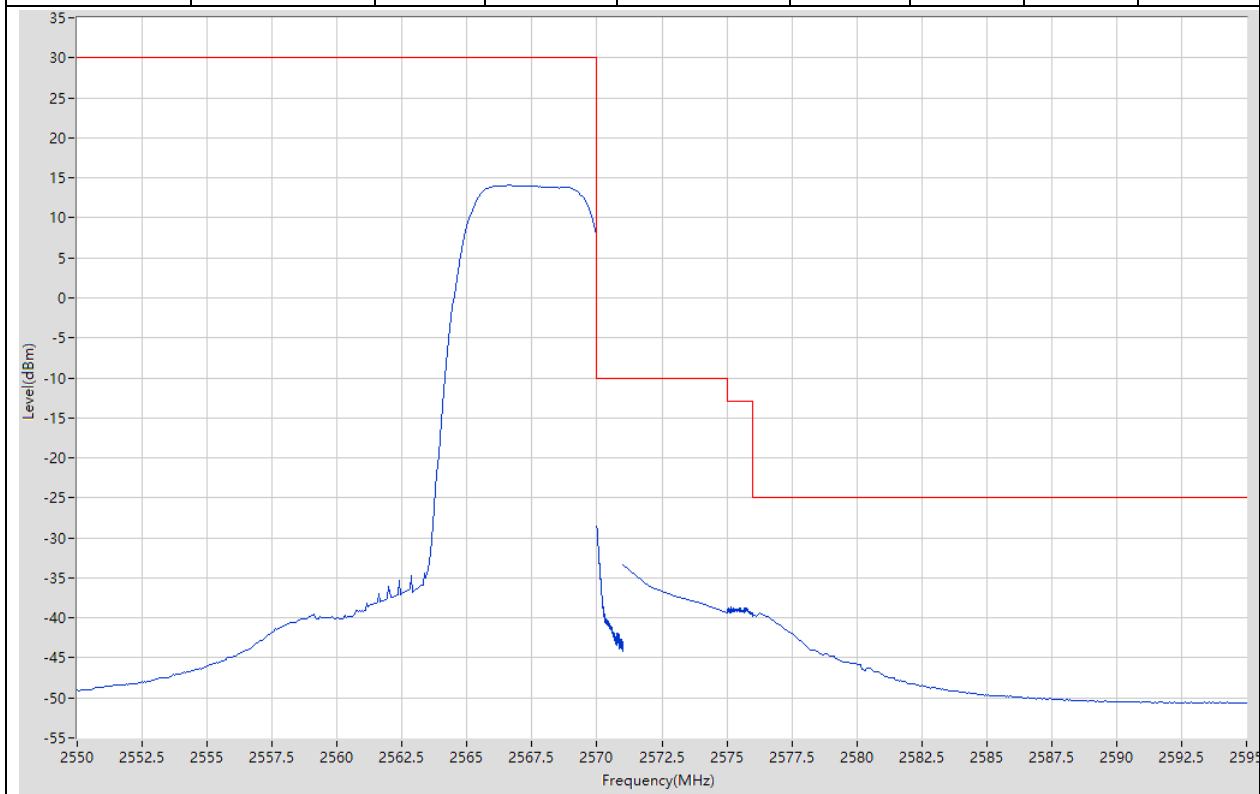


35.17. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2484.675 | -50.63 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2494.02 | -43.58 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -37.88 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2499.998 | -24.64 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.45 | 20.63 | 30 | Pass | 401 |

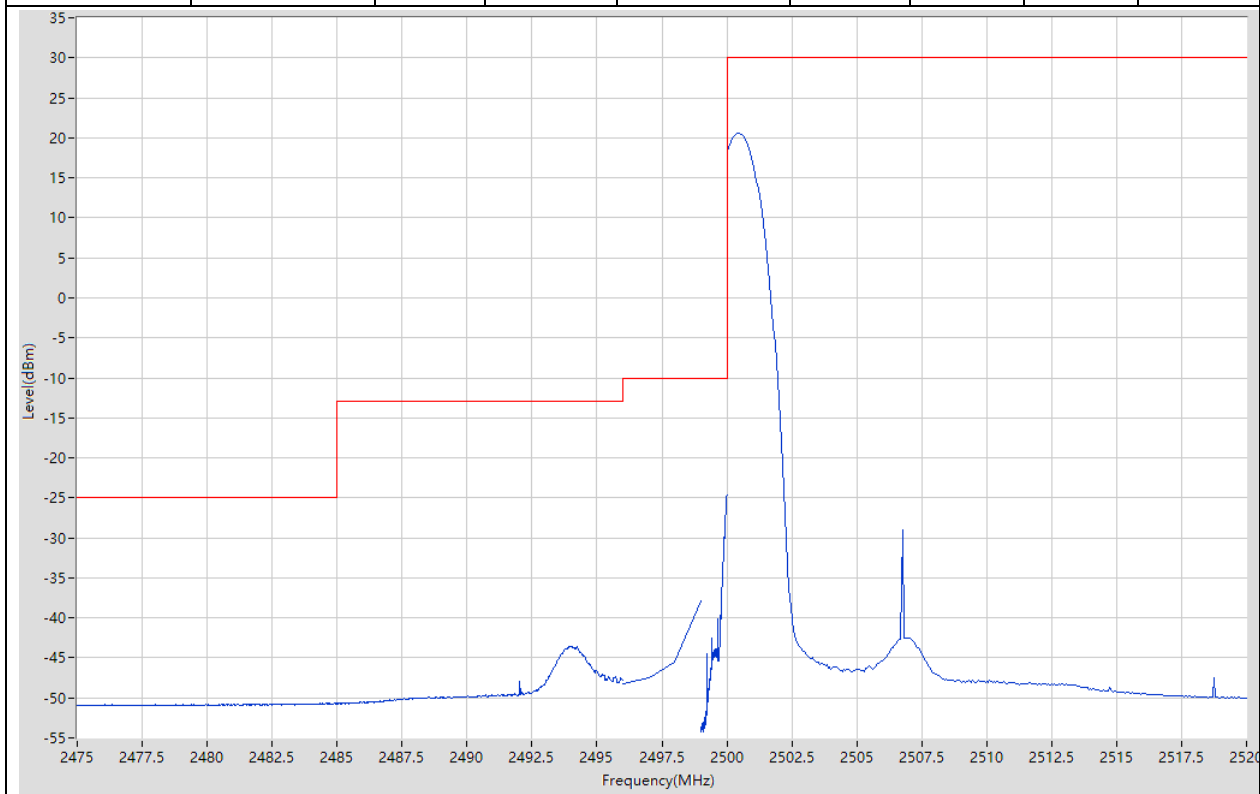


35.18. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:75@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2484.925 | -47.04 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2495.67 | -37.24 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -32.67 | -10 | Pass | 4 |
| 2499 | 2500 | 0.3 | RMS | 2500 | -24.44 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2512.5 | 9.56 | 30 | Pass | 401 |

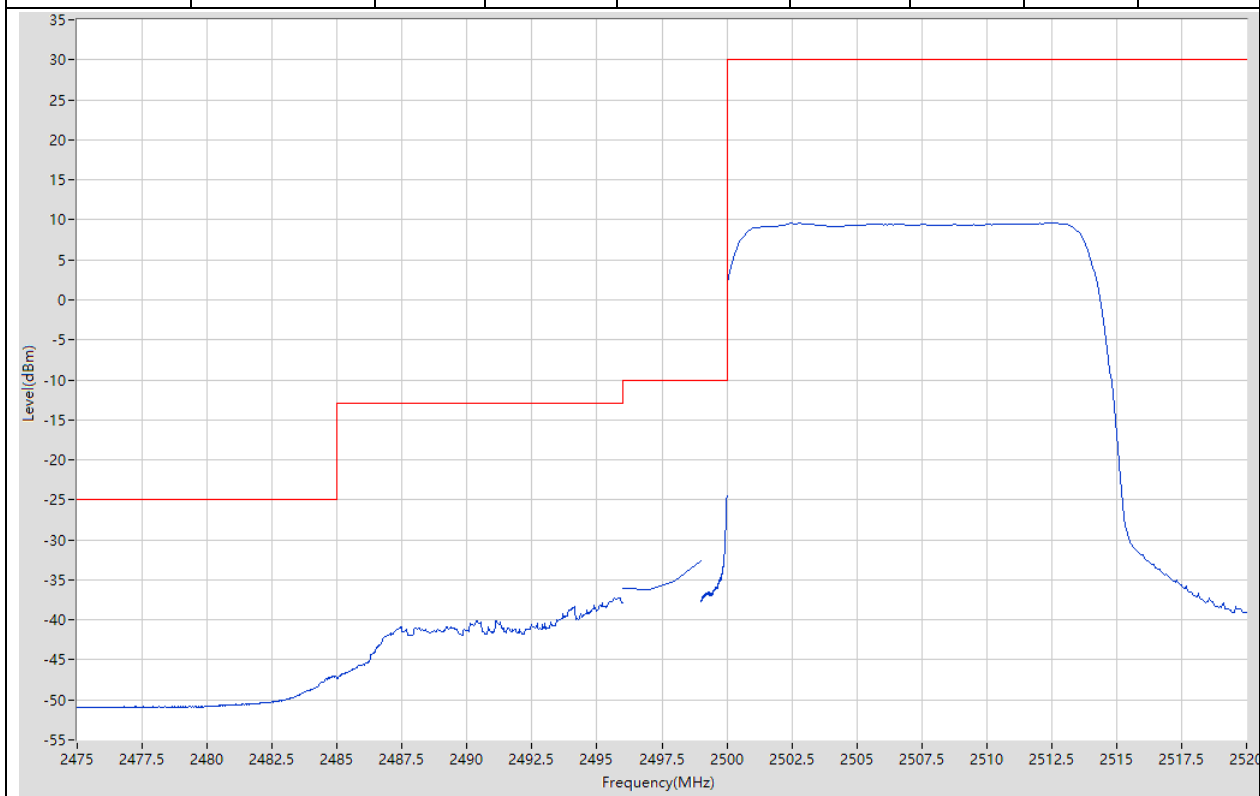


35.19. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@78, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.5 | 20.33 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570 | -23.99 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -38.11 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2576.45 | -43.36 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2585.475 | -50.3 | -25 | Pass | 401 |

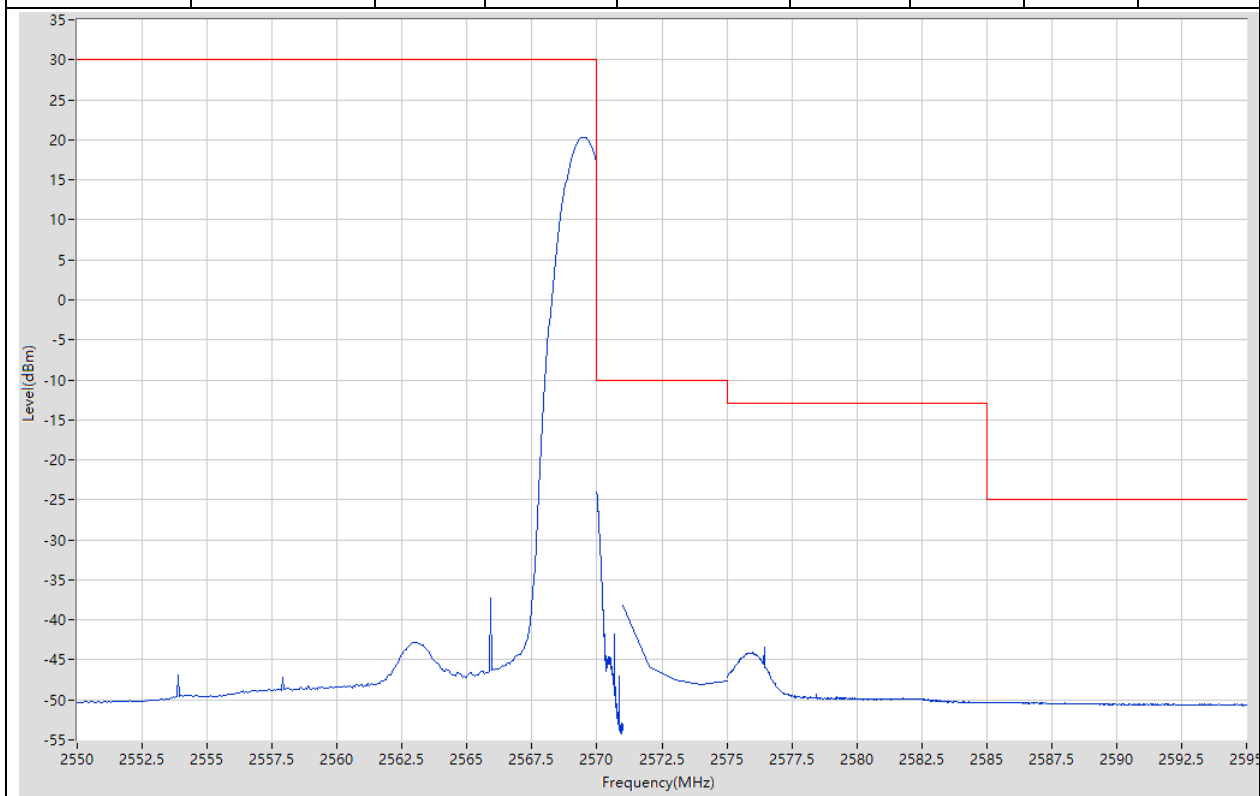


35.20. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:75@0, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2557.9 | 9.46 | 30 | Pass | 401 |
| 2570 | 2571 | 0.3 | RMS | 2570.155 | -35.33 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -32.98 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2575.1 | -37.93 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2585.35 | -44.39 | -25 | Pass | 401 |

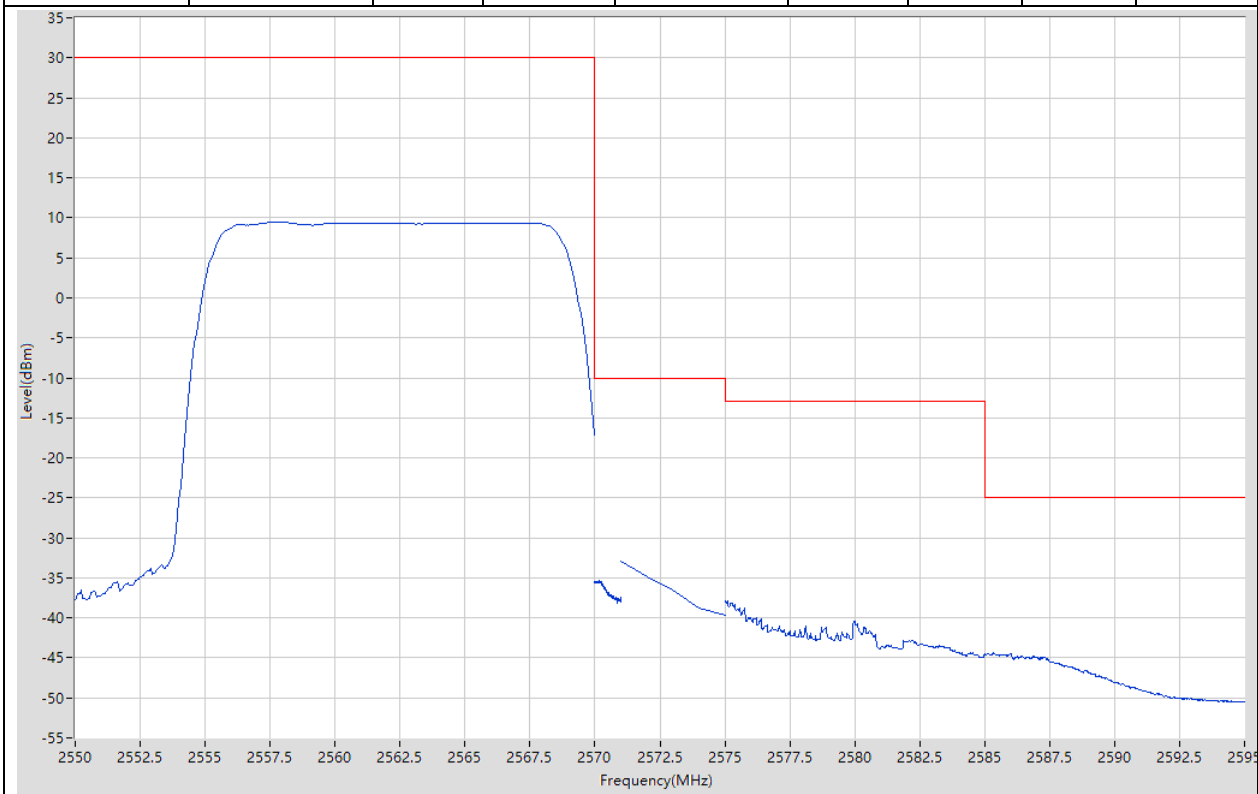


35.21. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2476.813 | -50.81 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2494.04 | -43.36 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -39.11 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -28.83 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.55 | 20.58 | 30 | Pass | 401 |

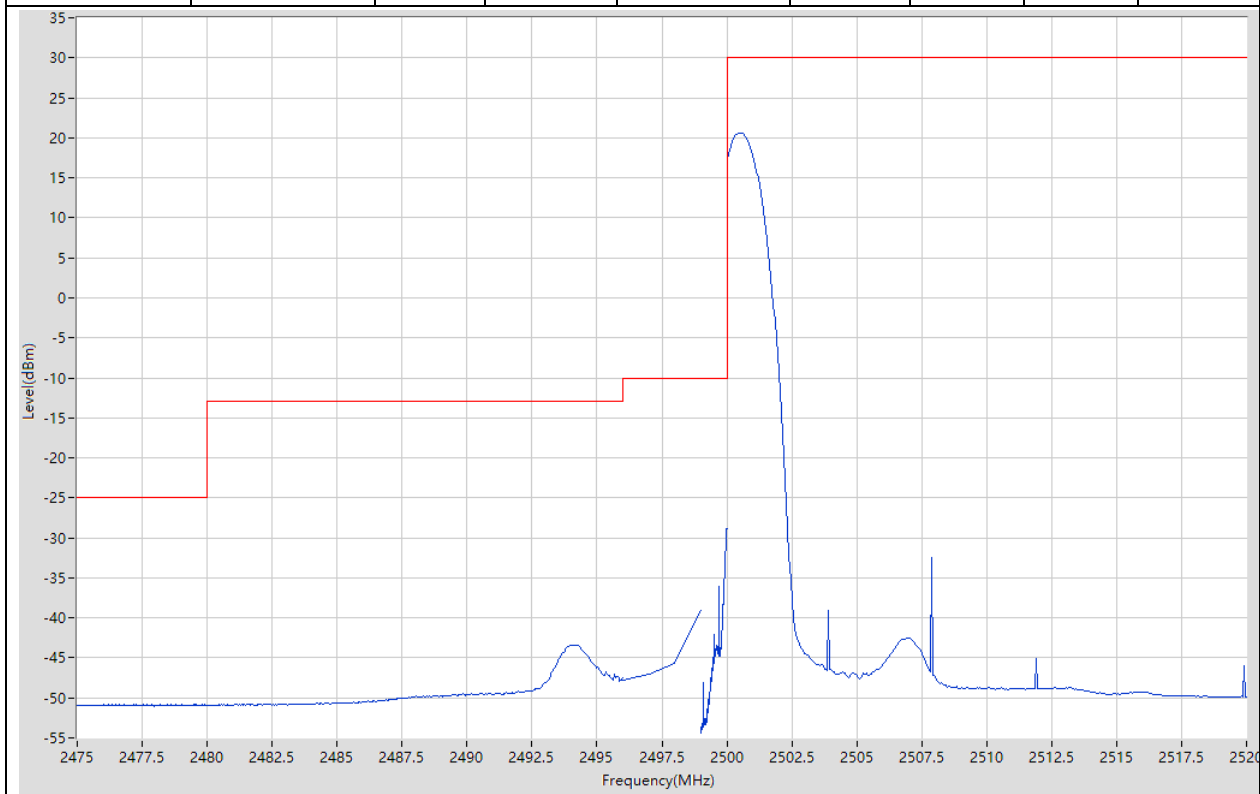


35.22. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:20450, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2479.788 | -50.74 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2495.92 | -35.39 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -32.06 | -10 | Pass | 4 |
| 2499 | 2500 | 0.39 | RMS | 2500 | -21.18 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2510.25 | 8.6 | 30 | Pass | 401 |

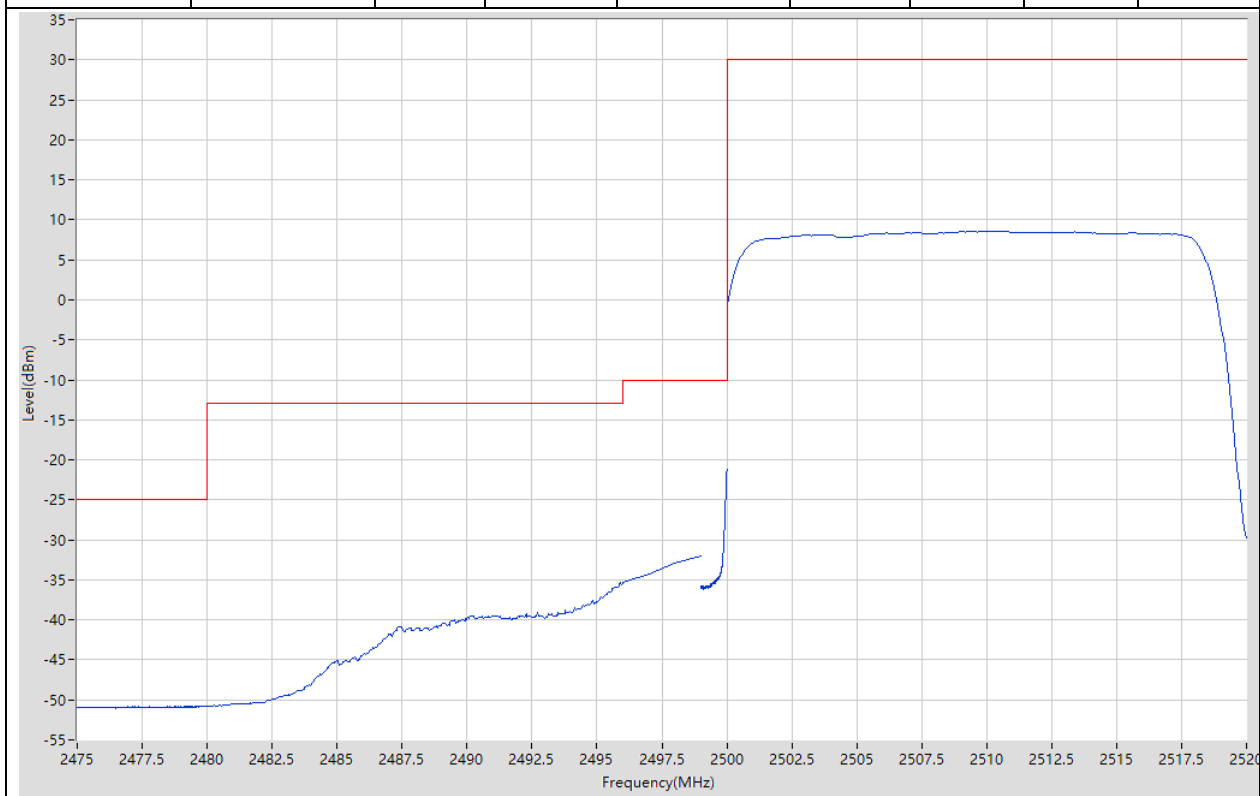


35.23. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@105, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.4 | 20.31 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570.003 | -28.14 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -39.38 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575.863 | -43.44 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590.275 | -50.48 | -25 | Pass | 401 |

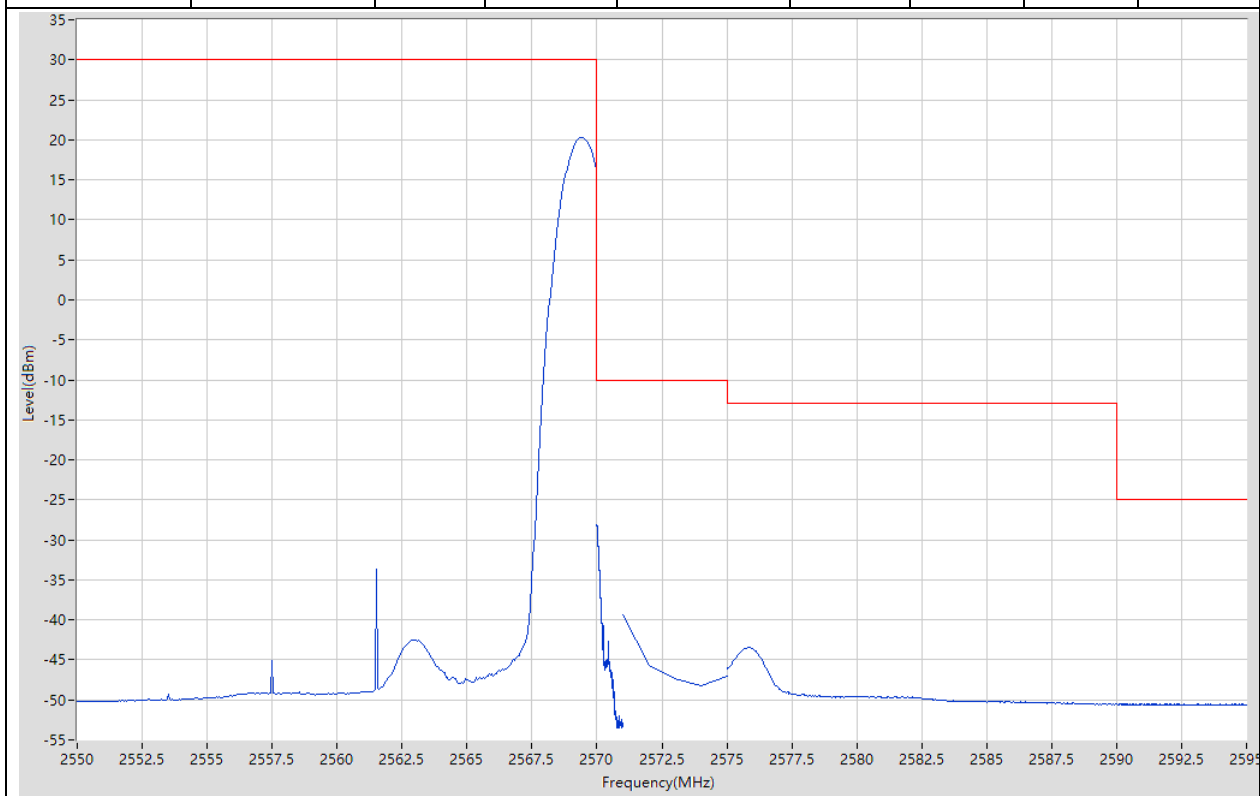

35.24. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:20600, LTE BW:10, QPSK, LTE RB:50@0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2560.05 | 8.57 | 30 | Pass | 401 |
| 2570 | 2571 | 0.39 | RMS | 2570.003 | -35.02 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -32.28 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575.075 | -37.37 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590.025 | -48.4 | -25 | Pass | 401 |

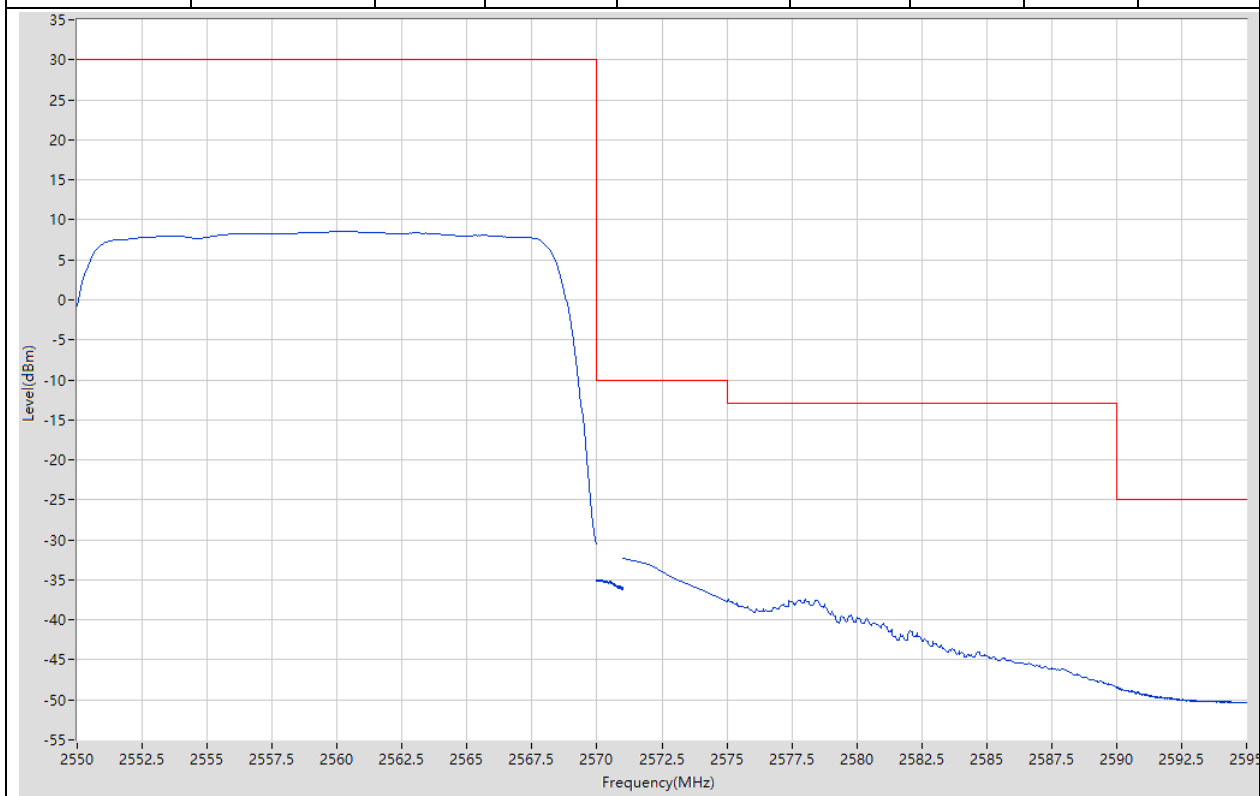

36. DC_7A_n5A_SCS15


36.1. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:165300, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.16 | -43.54 | -13 | Pass | 401 |
| 823 | 824 | 0.051 | RMS | 823.998 | -17.6 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.35 | 19.49 | 30 | Pass | 401 |

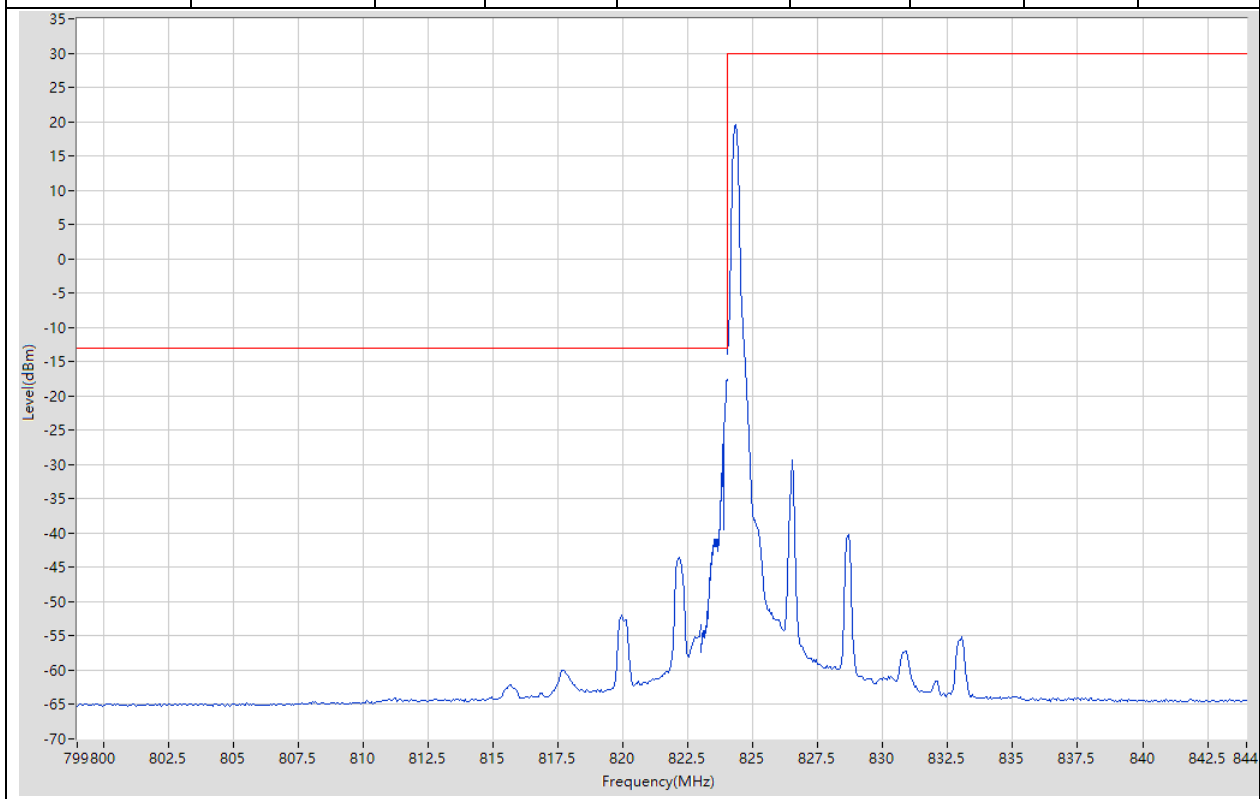


36.2. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:165300, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -37.83 | -13 | Pass | 401 |
| 823 | 824 | 0.051 | RMS | 824 | -30.39 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 826.15 | 6.43 | 30 | Pass | 401 |

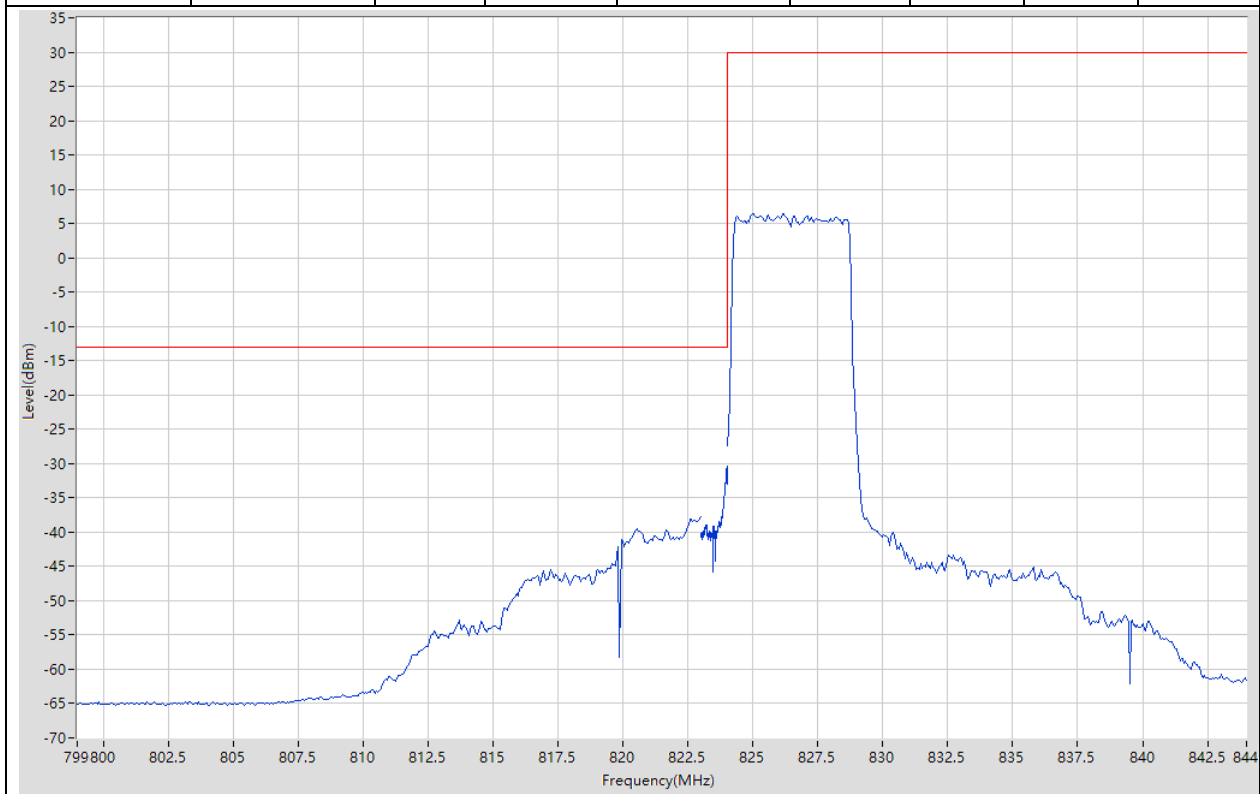


36.3. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:169300, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1 @24, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.65 | 19 | 30 | Pass | 401 |
| 849 | 850 | 0.051 | RMS | 849 | -16.42 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.78 | -44.07 | -13 | Pass | 401 |

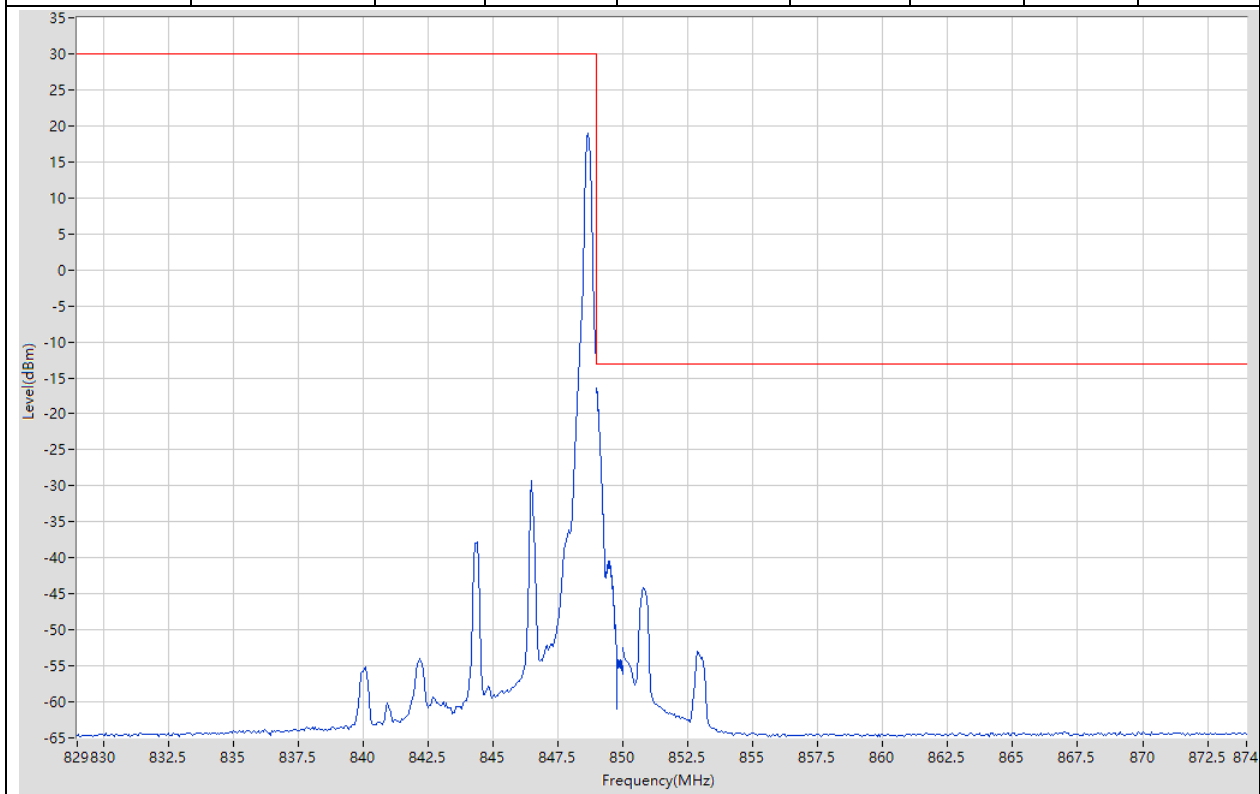


36.4. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:169300, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 845.05 | 6.18 | 30 | Pass | 401 |
| 849 | 850 | 0.051 | RMS | 849 | -29.63 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.06 | -38.58 | -13 | Pass | 401 |

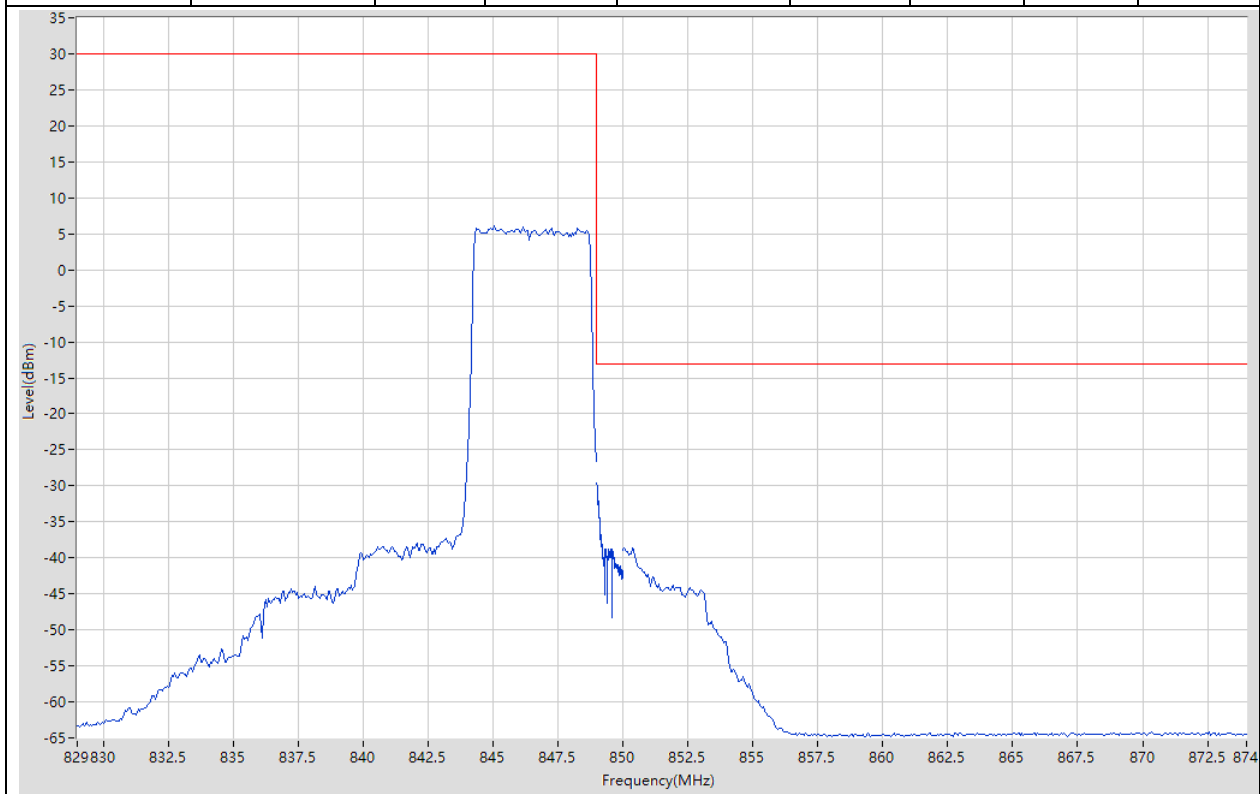


36.5. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:166300, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 817.48 | -46.59 | -13 | Pass | 401 |
| 823 | 824 | 0.15 | RMS | 824 | -17.16 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.45 | 19.42 | 30 | Pass | 401 |

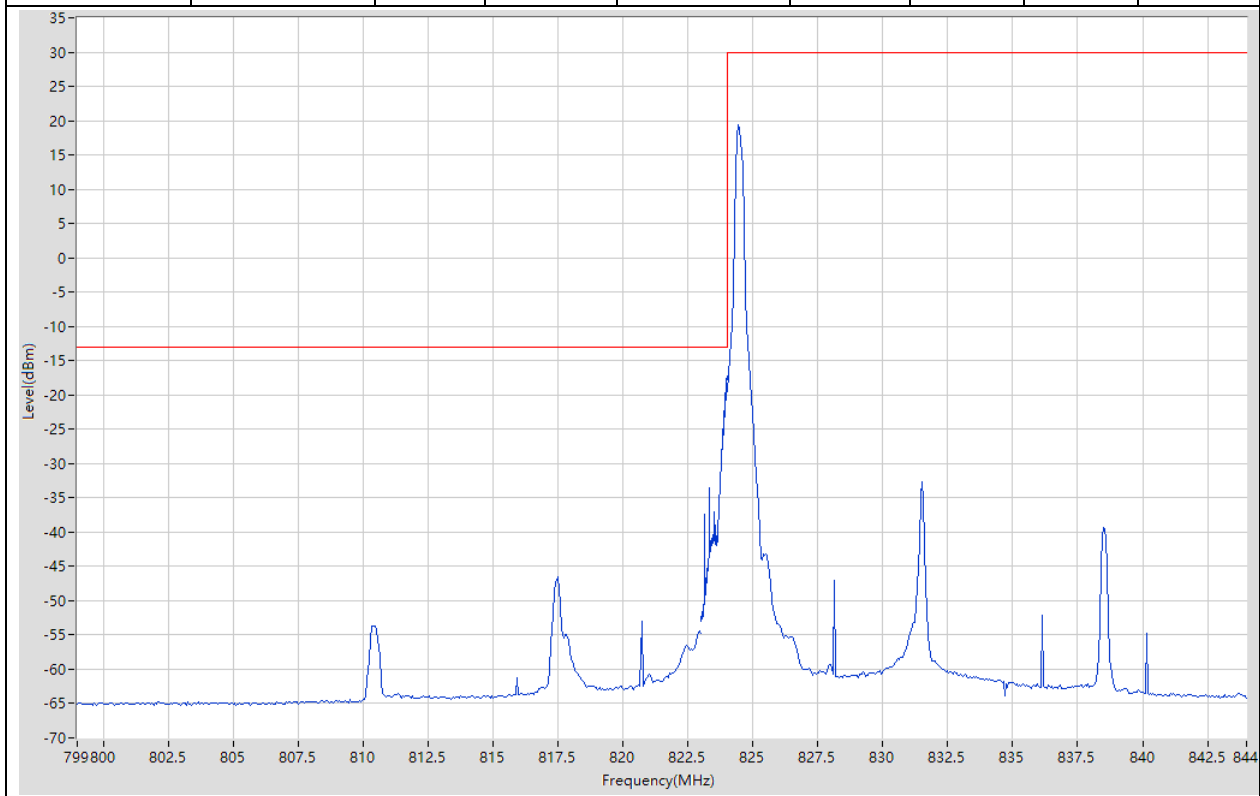


36.6. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:166300, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:75@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -37.23 | -13 | Pass | 401 |
| 823 | 824 | 0.15 | RMS | 823.998 | -30.94 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 827.3 | 2.12 | 30 | Pass | 401 |

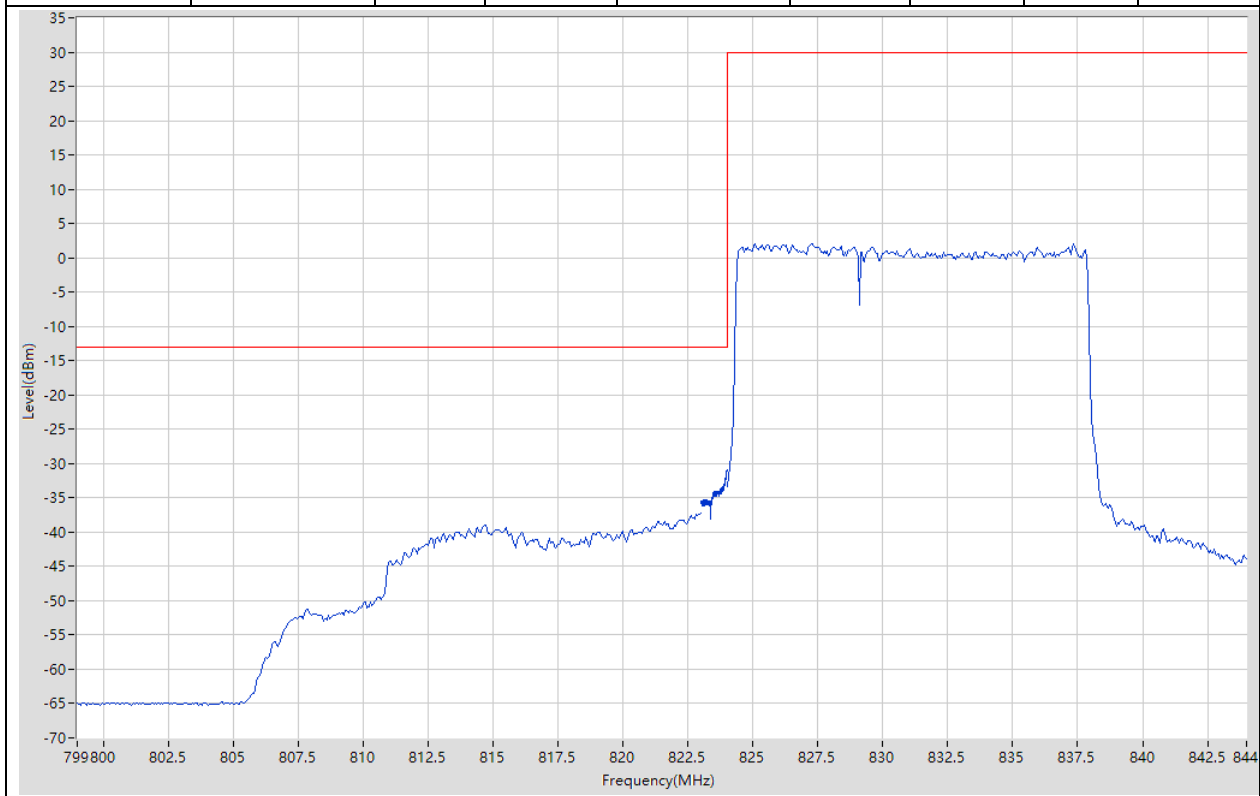


36.7. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:168300, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:1 @78, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.5 | 18.94 | 30 | Pass | 401 |
| 849 | 850 | 0.15 | RMS | 849.003 | -16.15 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.06 | -53.44 | -13 | Pass | 401 |

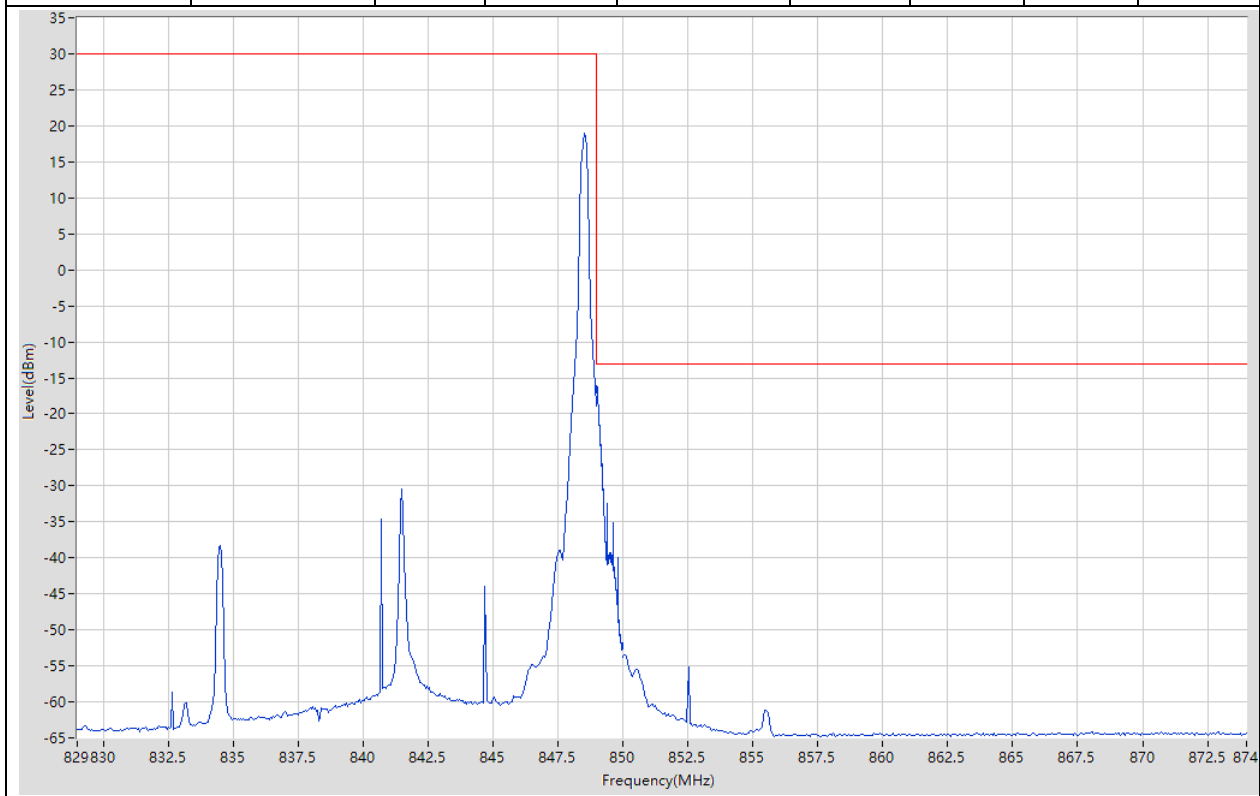


36.8. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:168300, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:75@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 841.7 | 1.76 | 30 | Pass | 401 |
| 849 | 850 | 0.15 | RMS | 849.038 | -37.84 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850 | -40.15 | -13 | Pass | 401 |

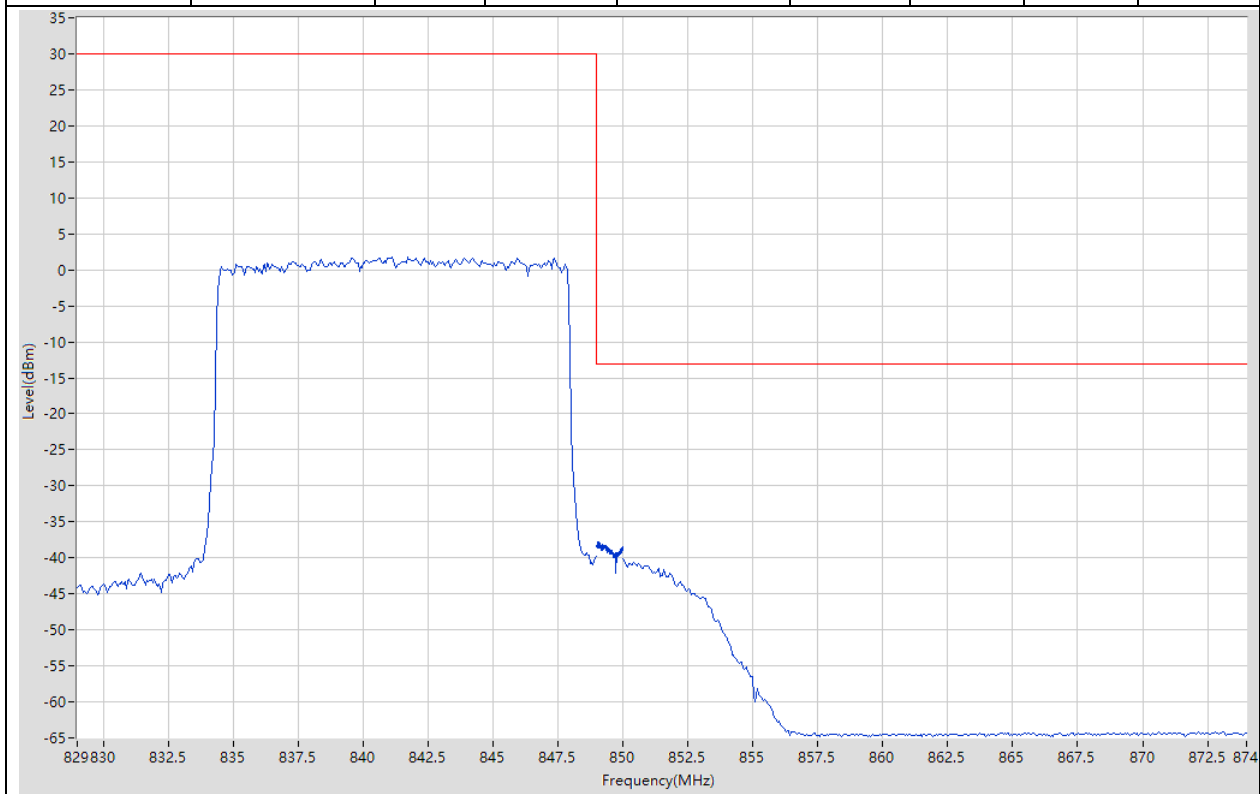


36.9. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:166800, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 815.02 | -44.86 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 823.998 | -18.54 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.55 | 19.39 | 30 | Pass | 401 |

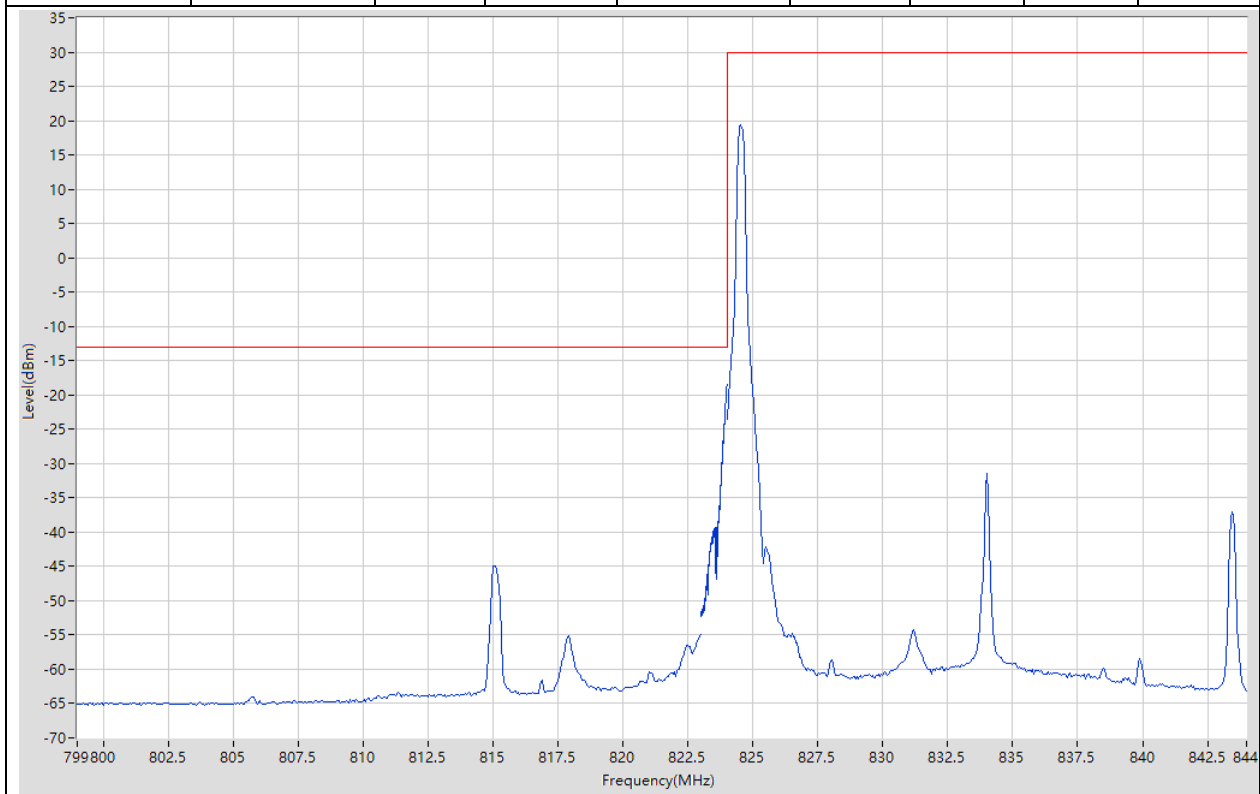


36.10. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:166800, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -35.68 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 824 | -31.44 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 840.45 | 0.44 | 30 | Pass | 401 |

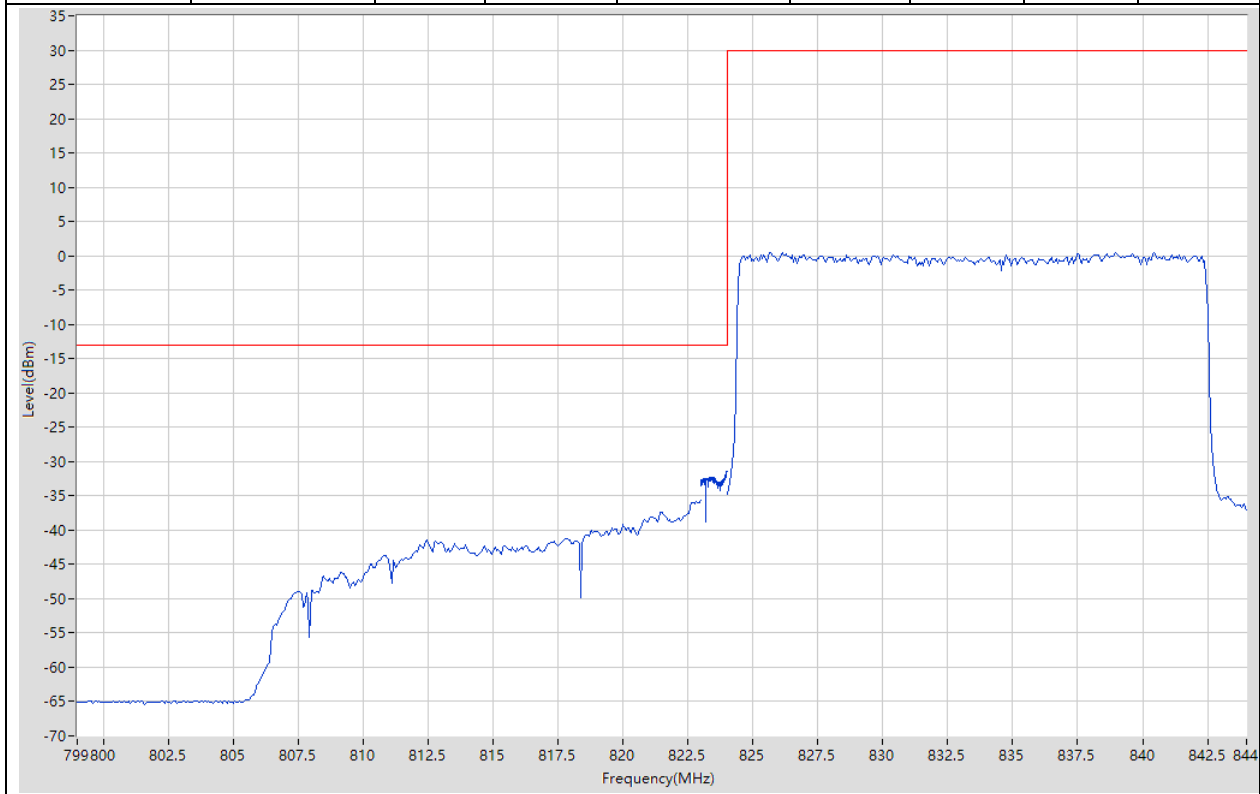

36.11. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:167800, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@105, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.45 | 19.22 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849.005 | -17.81 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.66 | -54.02 | -13 | Pass | 401 |

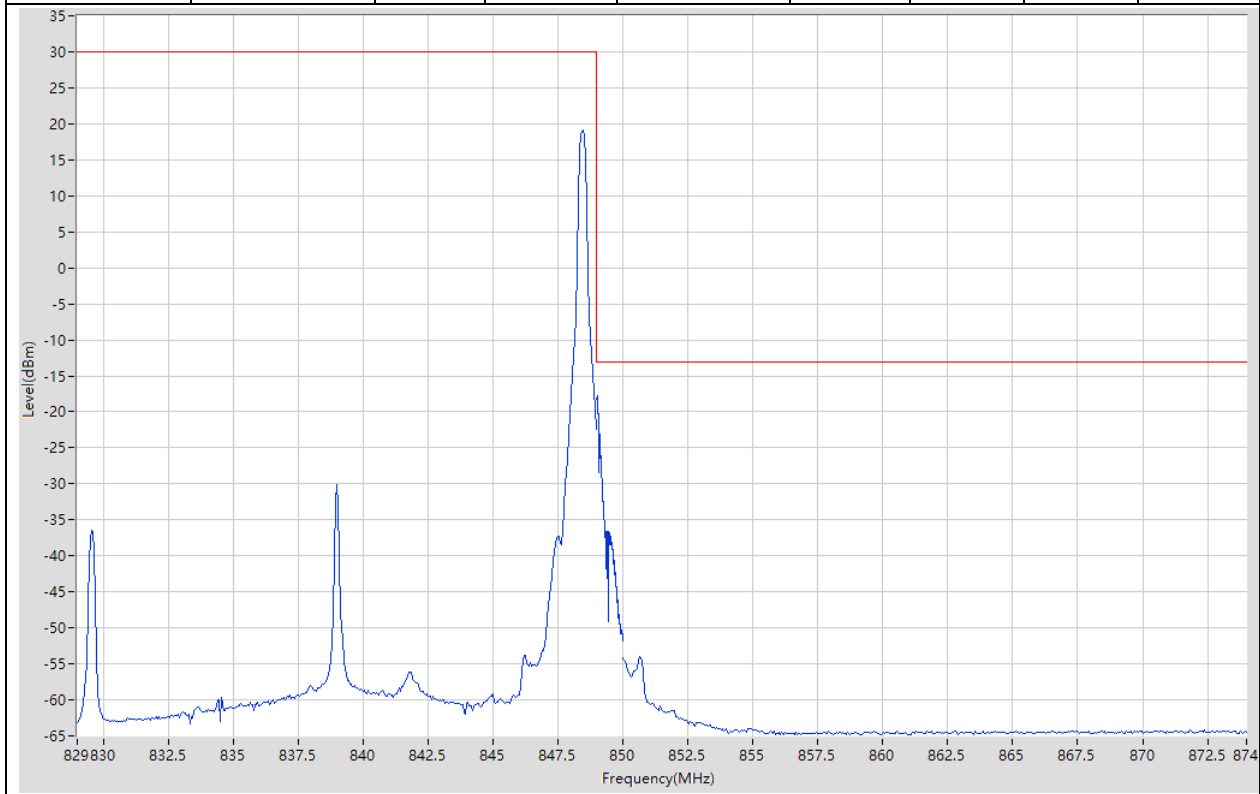


36.12. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:167800, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 842.5 | 0.93 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849.17 | -36.26 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.18 | -40.47 | -13 | Pass | 401 |




36.13. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:165300, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.22 | -42.87 | -13 | Pass | 401 |
| 823 | 824 | 0.051 | RMS | 824 | -18.59 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.35 | 18.51 | 30 | Pass | 401 |

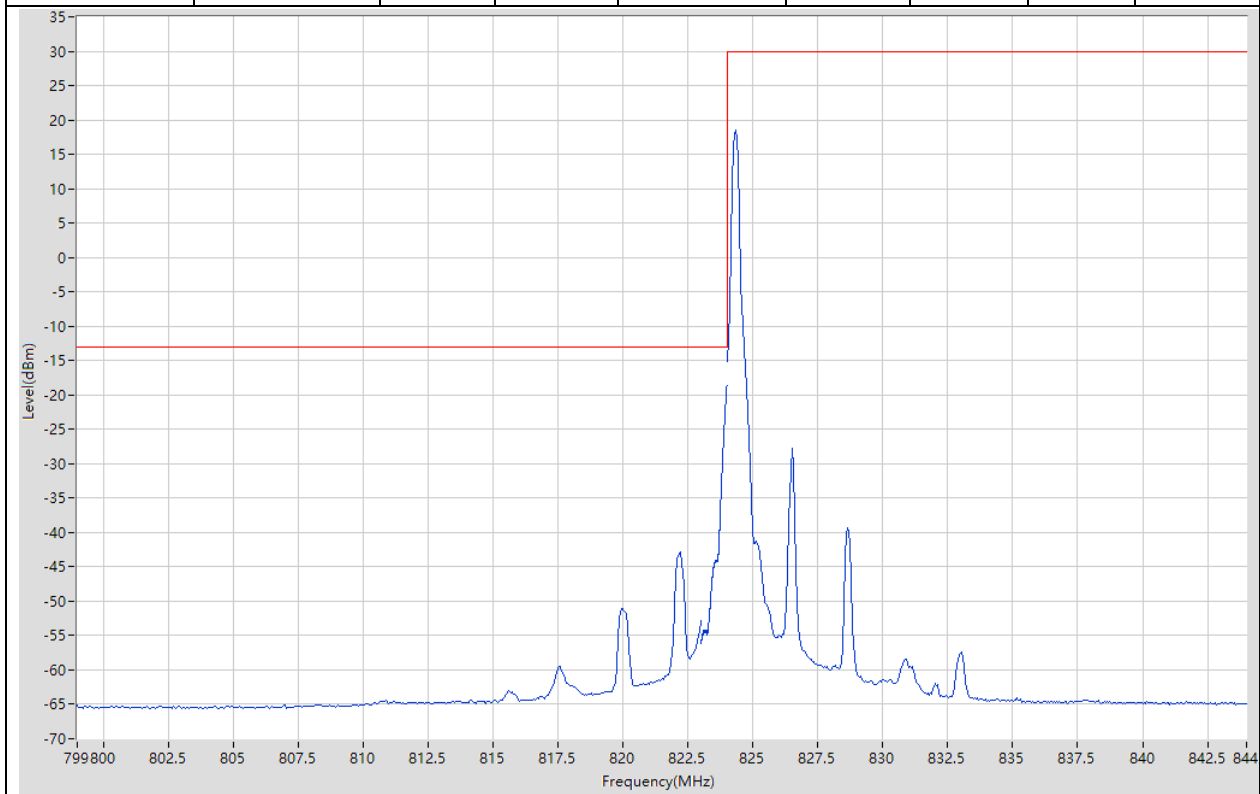


36.14. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:165300, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 823 | -38.17 | -13 | Pass | 401 |
| 823 | 824 | 0.051 | RMS | 824 | -30.51 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 826.9 | 5.46 | 30 | Pass | 401 |

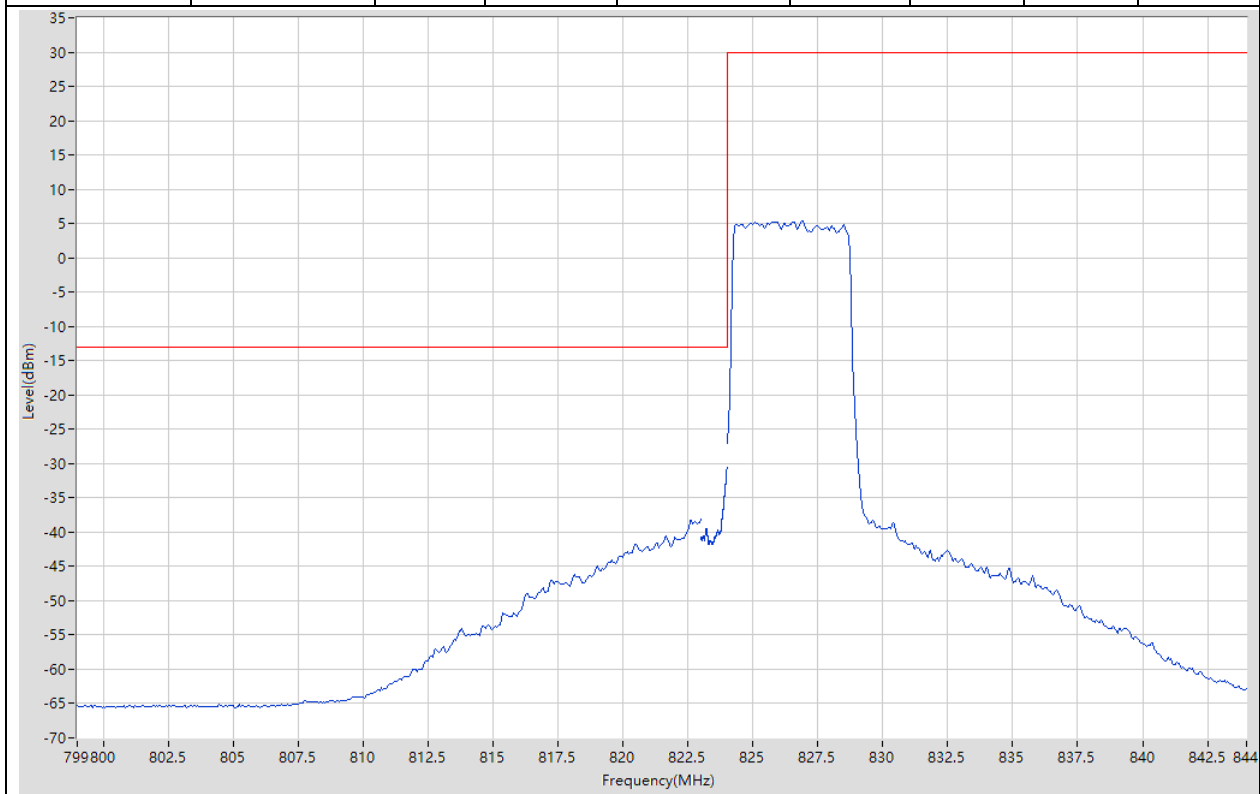


36.15. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:169300, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@24, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.65 | 18.09 | 30 | Pass | 401 |
| 849 | 850 | 0.051 | RMS | 849 | -17.28 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.84 | -43.36 | -13 | Pass | 401 |

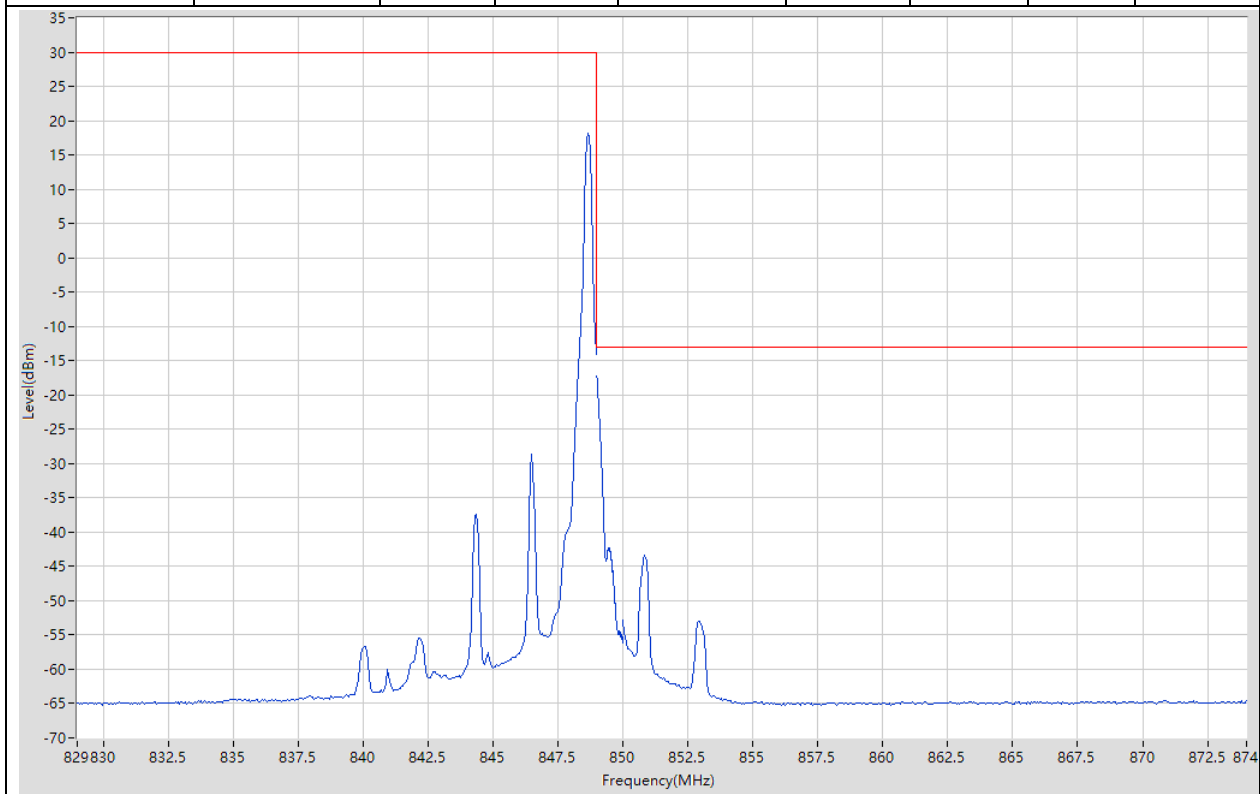


36.16. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:169300, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 846.9 | 5.18 | 30 | Pass | 401 |
| 849 | 850 | 0.051 | RMS | 849 | -31.31 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.42 | -37.44 | -13 | Pass | 401 |

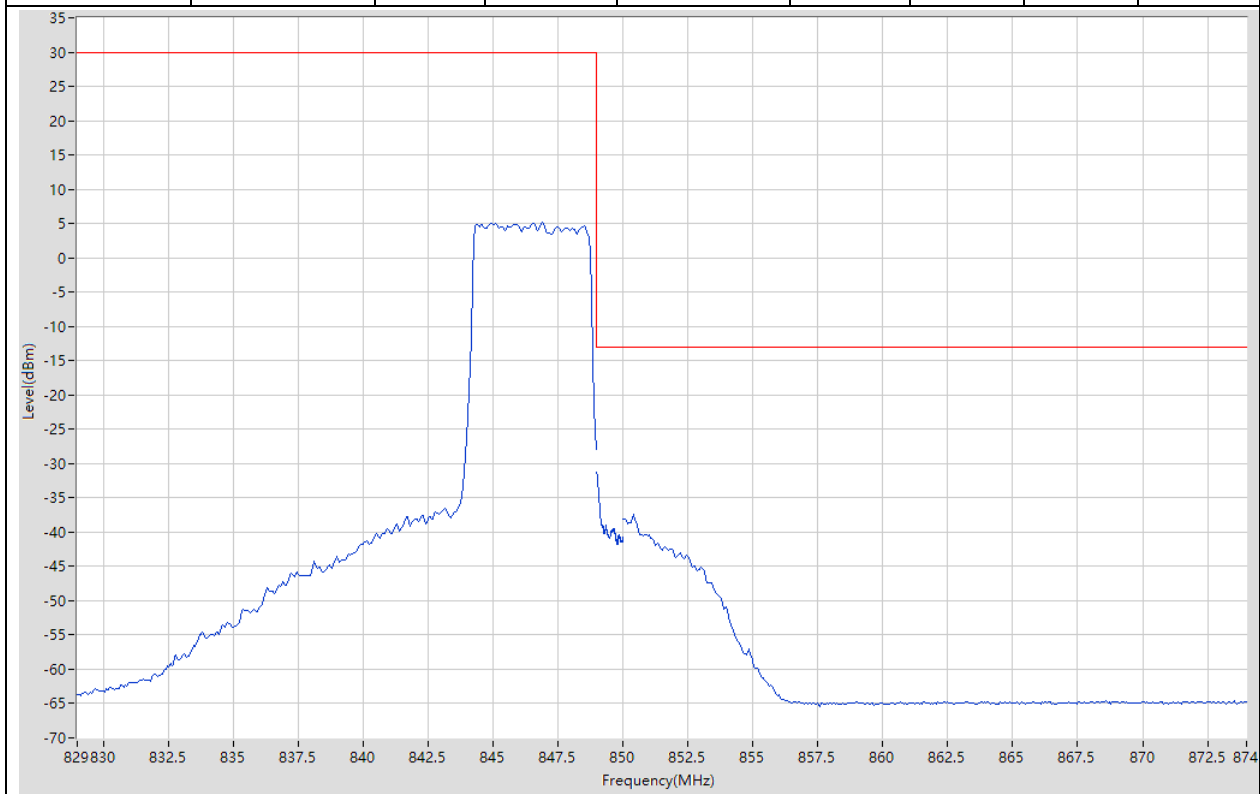


36.17. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:166300, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 817.42 | -47.03 | -13 | Pass | 401 |
| 823 | 824 | 0.15 | RMS | 823.998 | -18.36 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.5 | 18.5 | 30 | Pass | 401 |

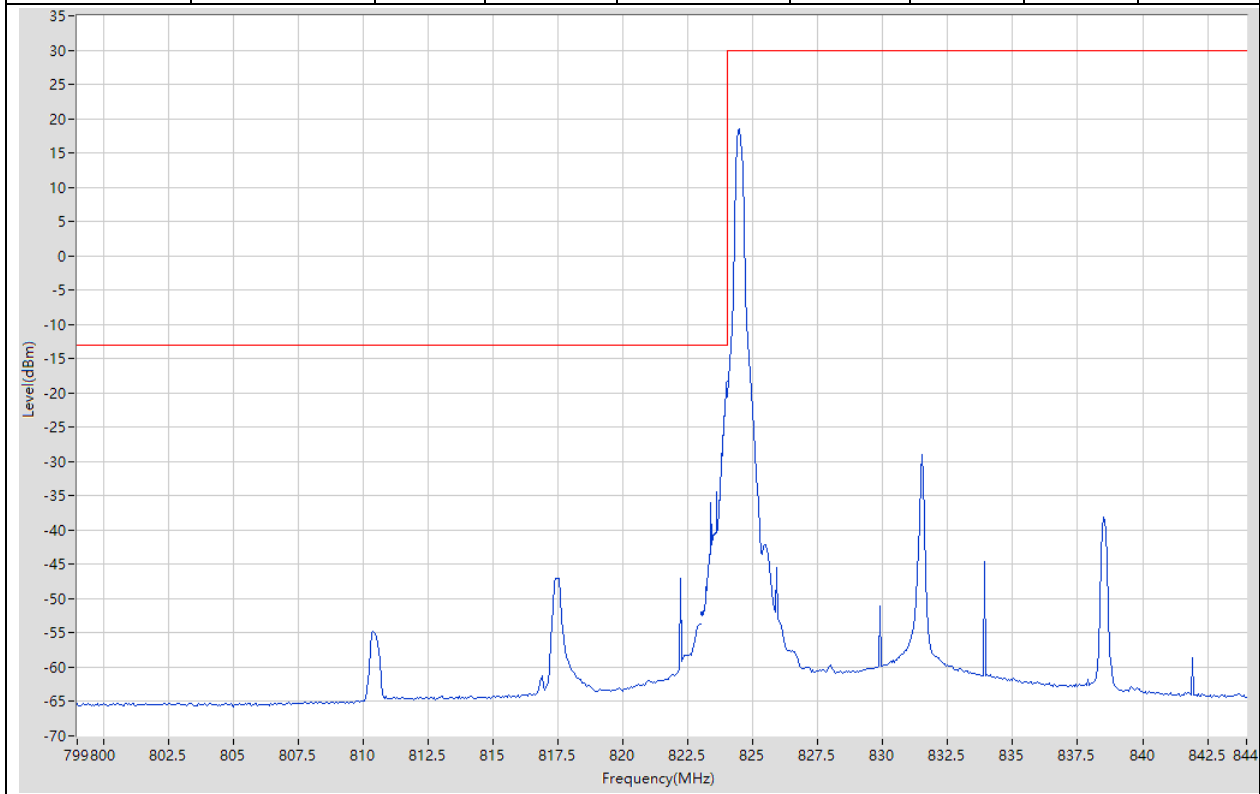


36.18. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:166300, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:75@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.52 | -38.04 | -13 | Pass | 401 |
| 823 | 824 | 0.15 | RMS | 824 | -31.62 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 826.7 | 1.26 | 30 | Pass | 401 |

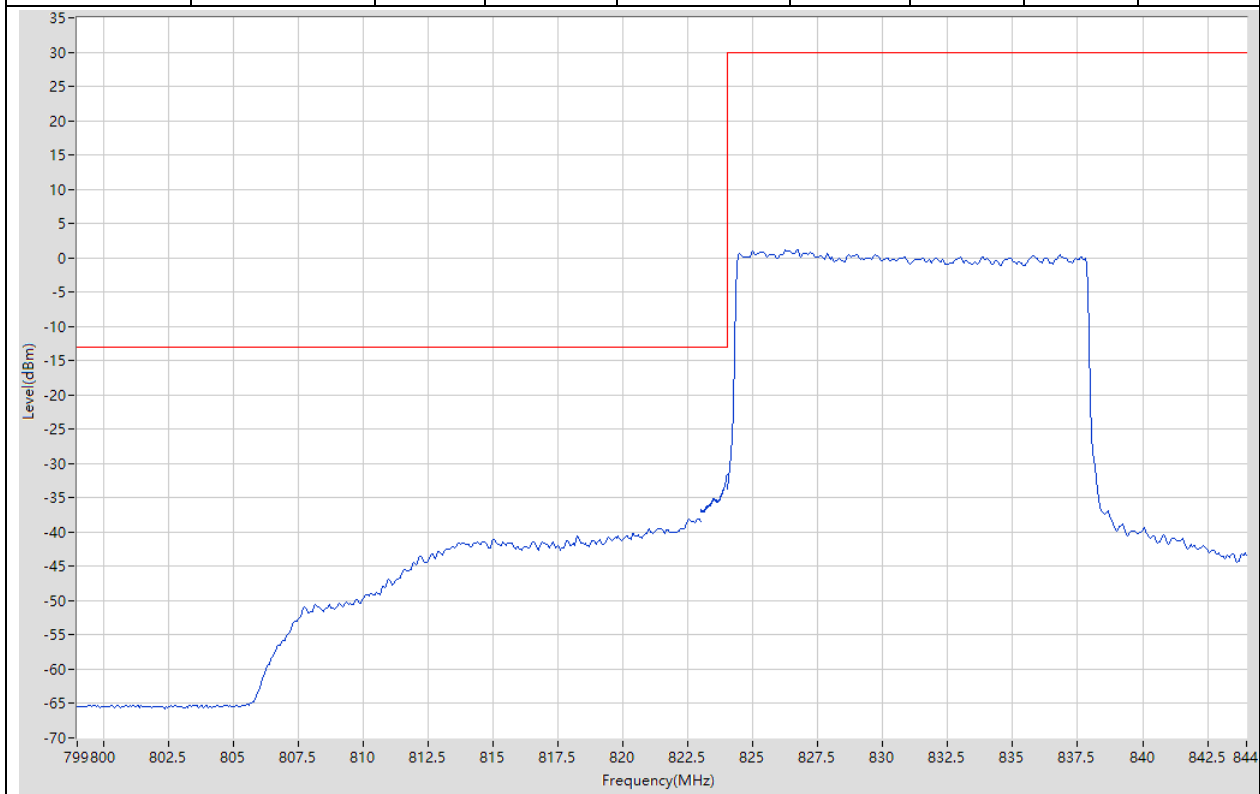


36.19. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:168300, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1 @78, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.5 | 18.17 | 30 | Pass | 401 |
| 849 | 850 | 0.15 | RMS | 849 | -17.2 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.06 | -53.51 | -13 | Pass | 401 |

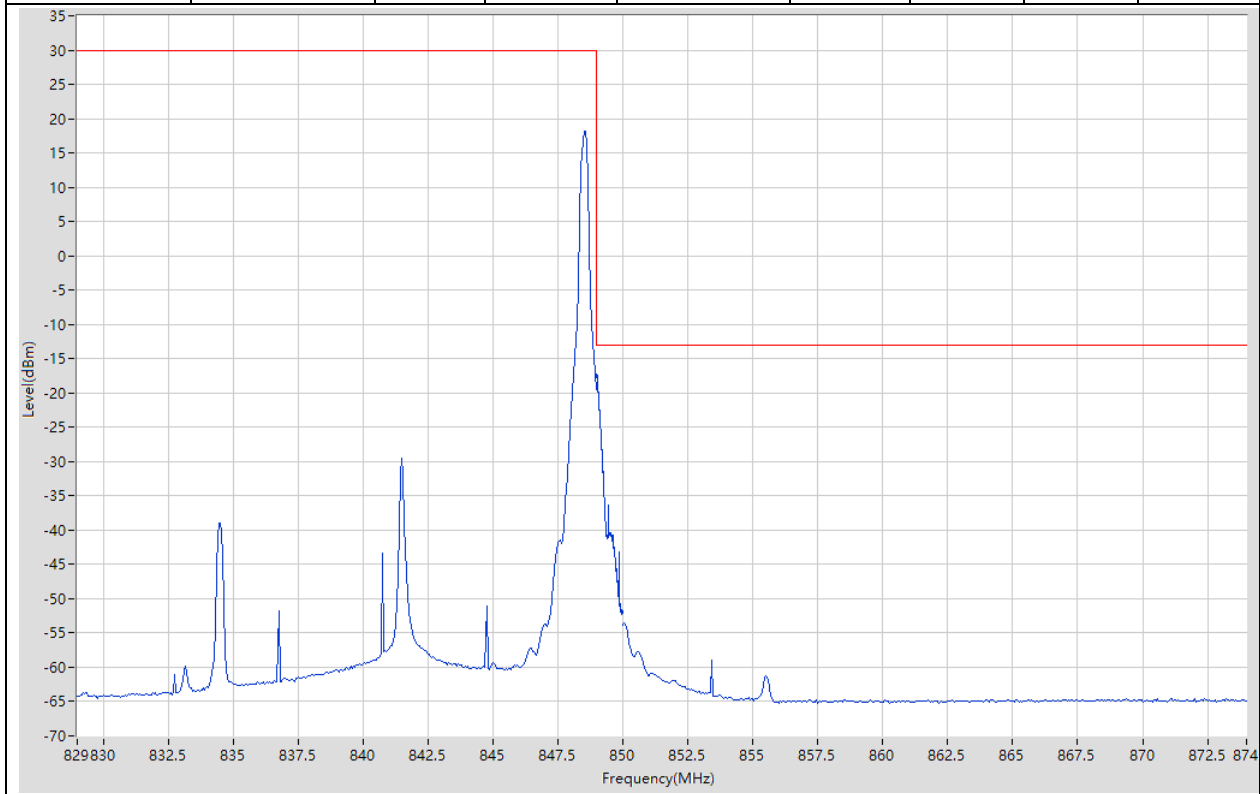


36.20. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:168300, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:75@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 843 | 0.8 | 30 | Pass | 401 |
| 849 | 850 | 0.15 | RMS | 849.288 | -37.89 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.18 | -40.18 | -13 | Pass | 401 |

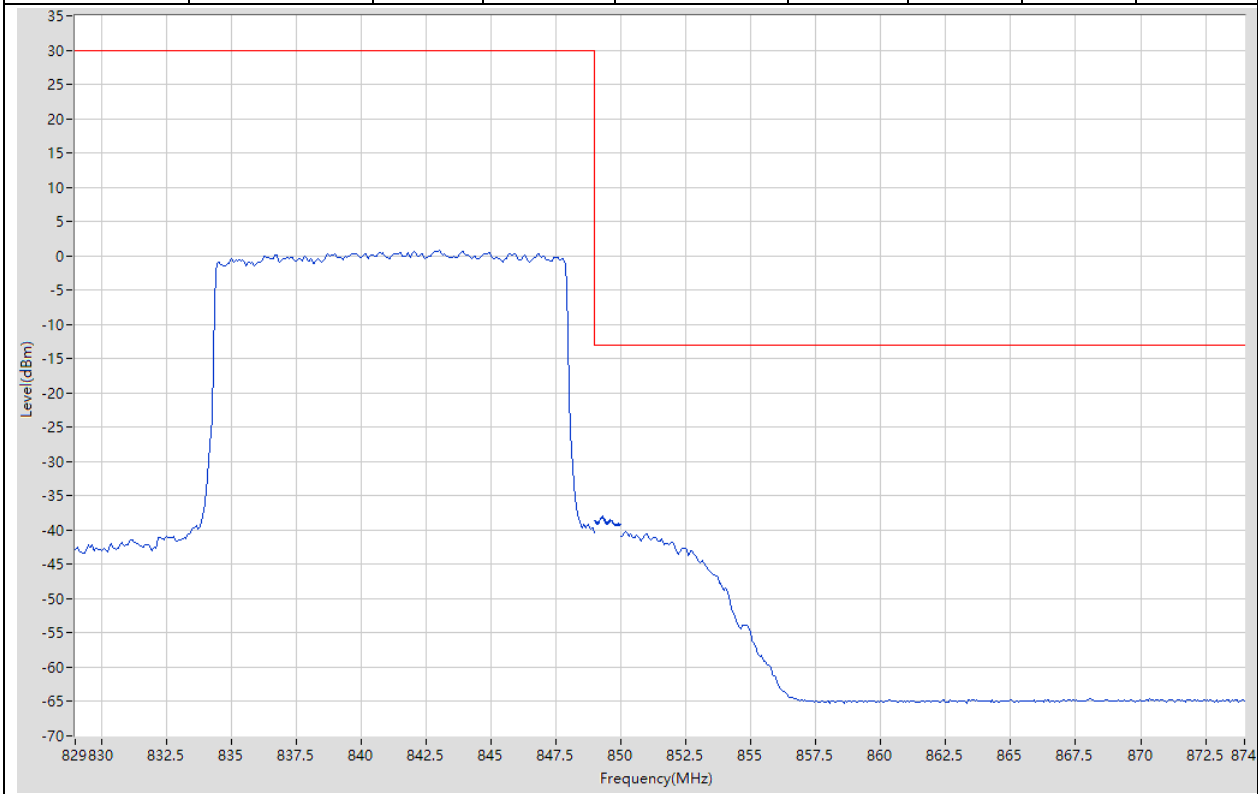


36.21. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:166800, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 815.14 | -46.88 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 824 | -19.9 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 824.55 | 18.58 | 30 | Pass | 401 |

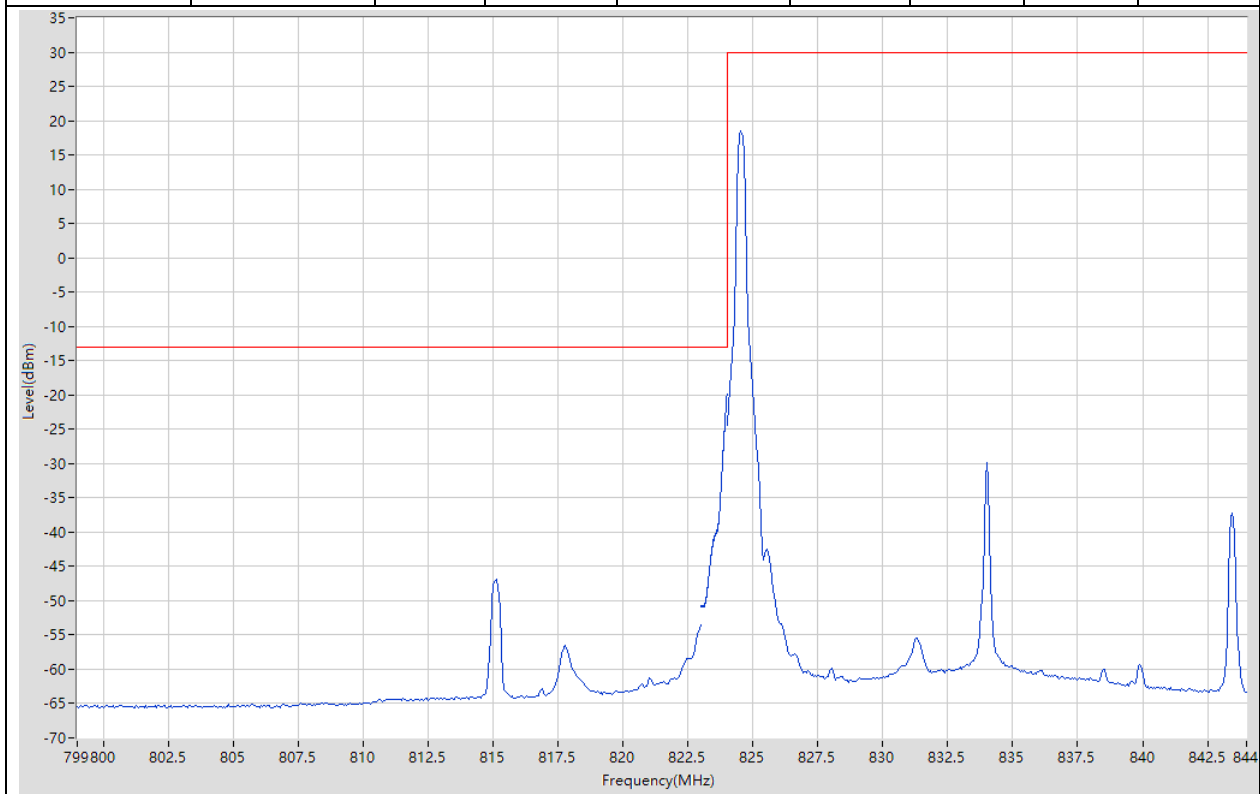


36.22. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:166800, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 799 | 823 | 0.1 | RMS | 822.88 | -36.43 | -13 | Pass | 401 |
| 823 | 824 | 0.2 | RMS | 823.998 | -32.1 | -13 | Pass | 401 |
| 824 | 844 | 0.1 | RMS | 826.55 | -0.14 | 30 | Pass | 401 |

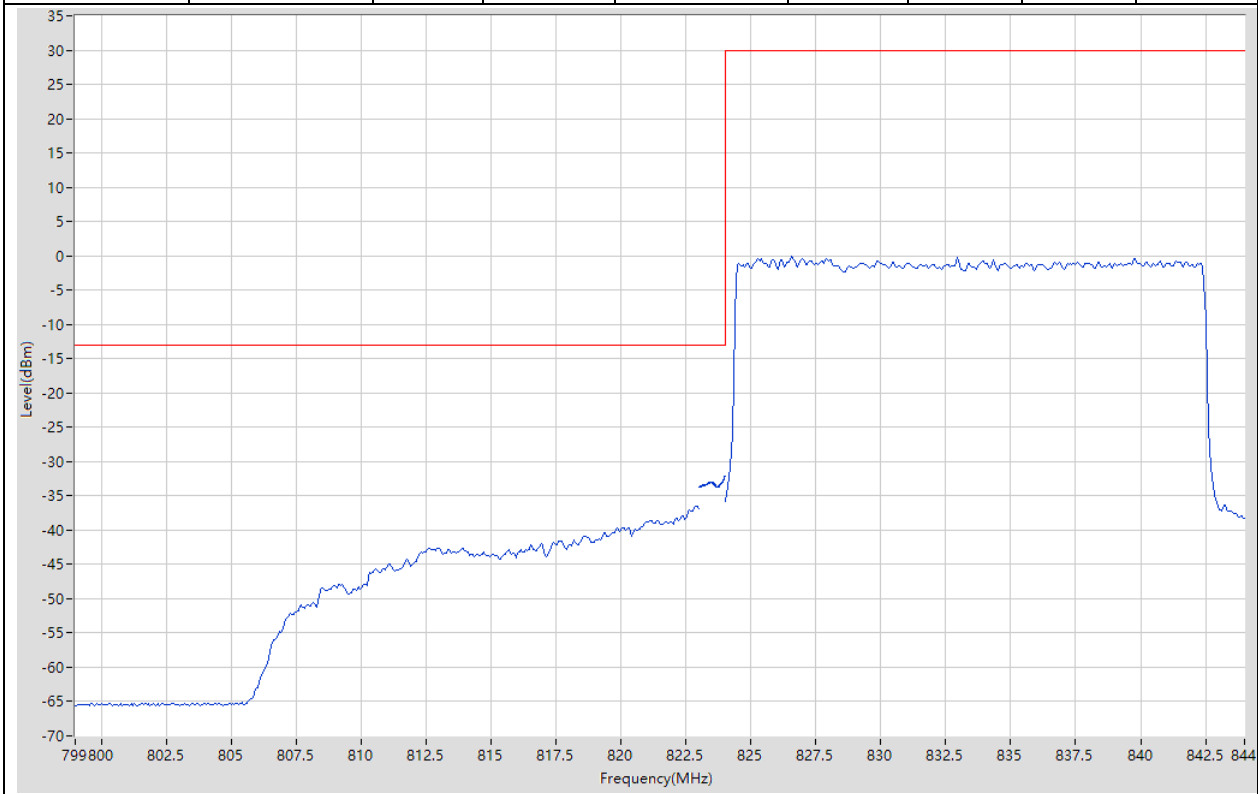

36.23. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:167800, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@105, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 848.45 | 18.22 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849.003 | -18.98 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850 | -53.59 | -13 | Pass | 401 |

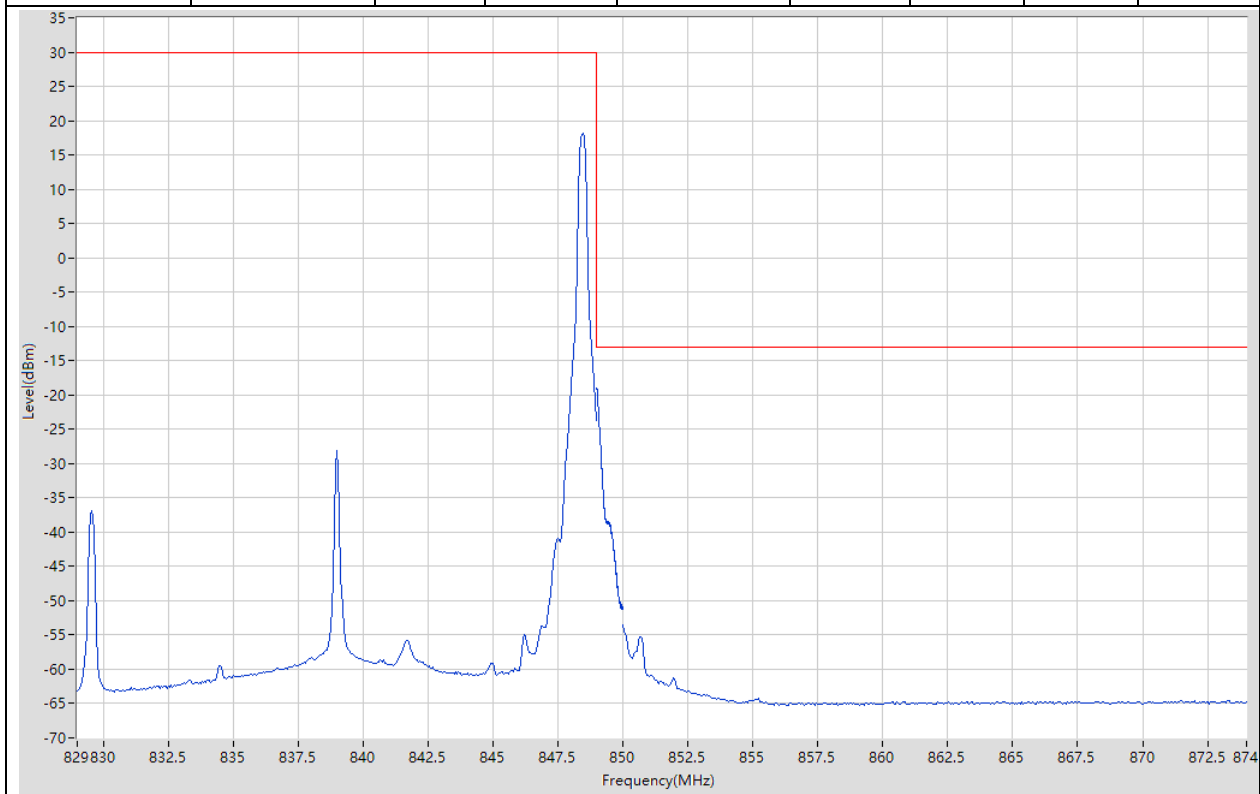

36.24. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:167800, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 829 | 849 | 0.1 | RMS | 837.95 | 0.1 | 30 | Pass | 401 |
| 849 | 850 | 0.2 | RMS | 849.193 | -37.48 | -13 | Pass | 401 |
| 850 | 874 | 0.1 | RMS | 850.18 | -41.69 | -13 | Pass | 401 |



37. DC_7A_n66A_SCS15


37.1. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:342500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1708 | -41.72 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -36.74 | -13 | Pass | 2 |
| 1709 | 1710 | 0.05 | RMS | 1710 | -16.96 | -13 | Pass | 21 |
| 1710 | 1750 | 1 | RMS | 1710.3 | 21.98 | 30 | Pass | 401 |

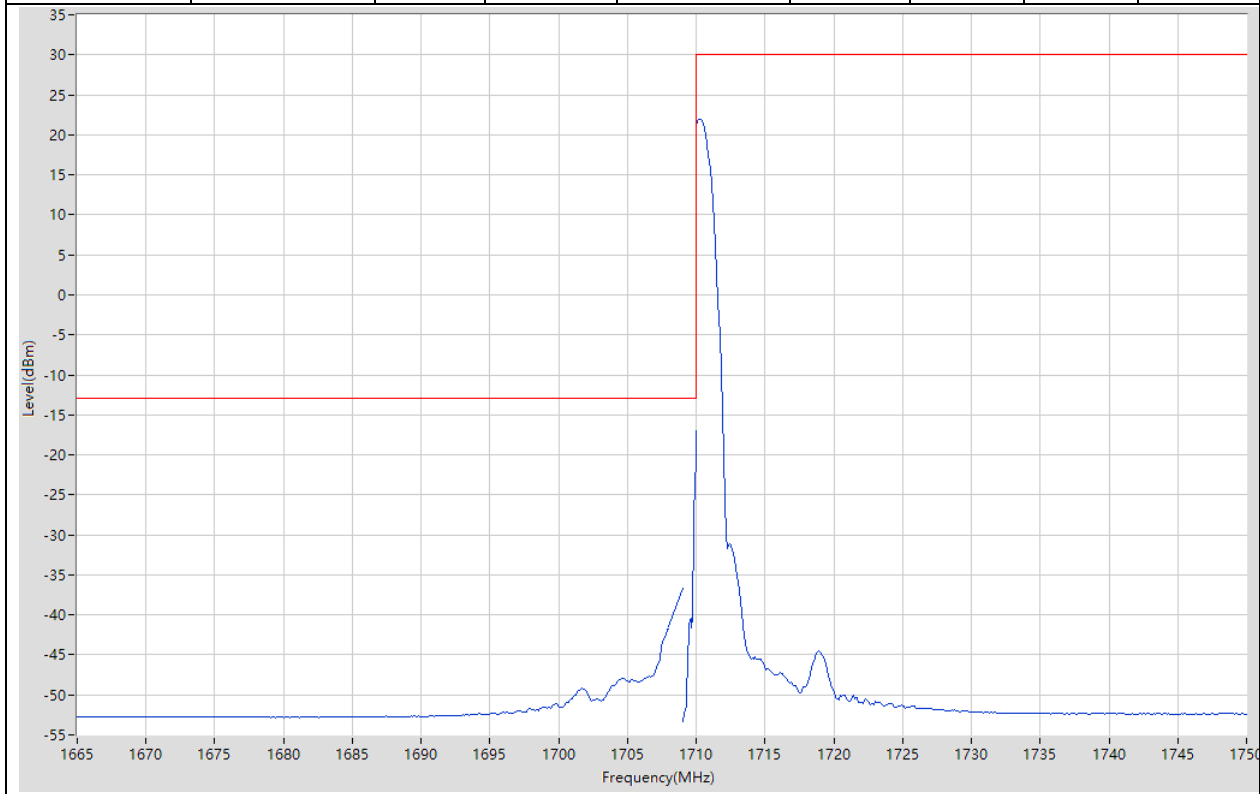


37.2. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:342500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1708 | -32.9 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -30.04 | -13 | Pass | 2 |
| 1709 | 1710 | 0.051 | RMS | 1710 | -28.5 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1712.3 | 15.76 | 30 | Pass | 401 |

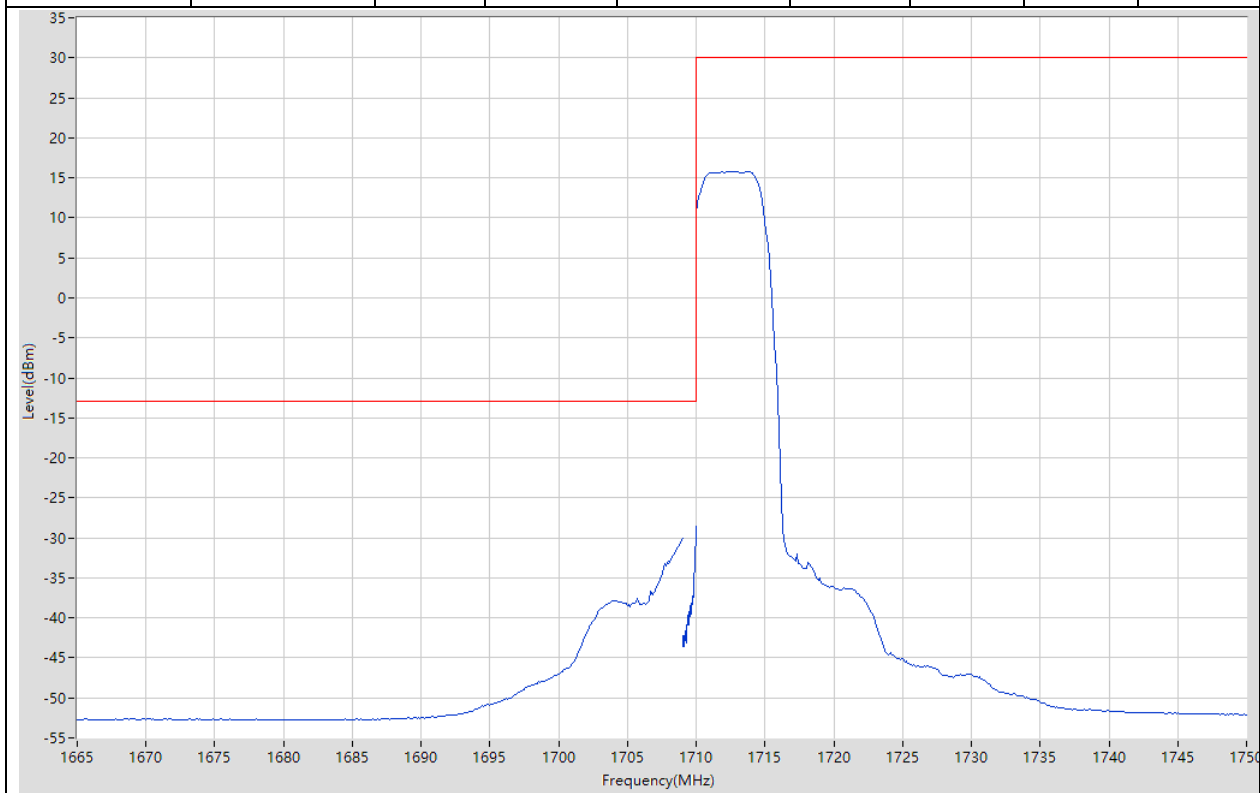


37.3. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:355500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@24, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.6 | 21.71 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780.003 | -17.44 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -37.41 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782 | -40.66 | -13 | Pass | 401 |

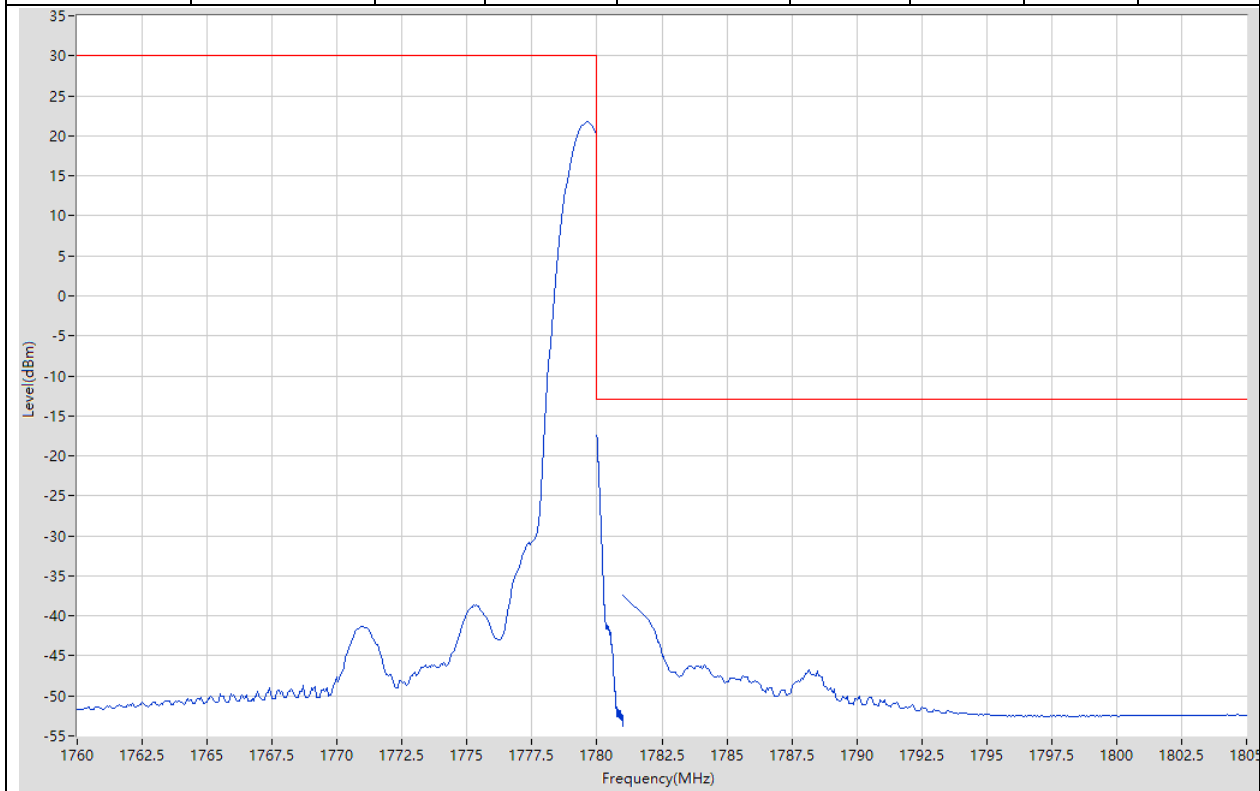


37.4. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:355500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1778.85 | 15.53 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780 | -28.06 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -31.6 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1783.438 | -34.73 | -13 | Pass | 401 |

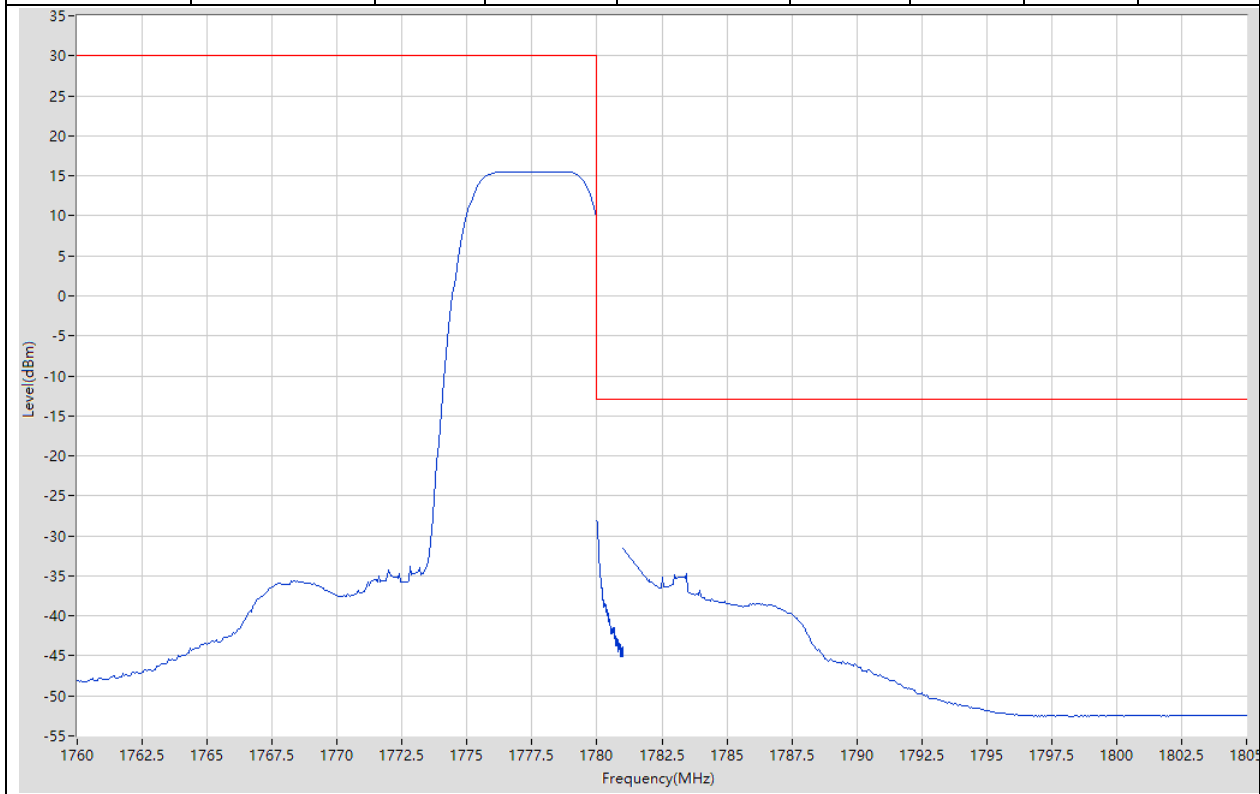


37.5. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:344000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1701.013 | -42.61 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -37.65 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1710 | -17.03 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1710.5 | 22.03 | 30 | Pass | 401 |

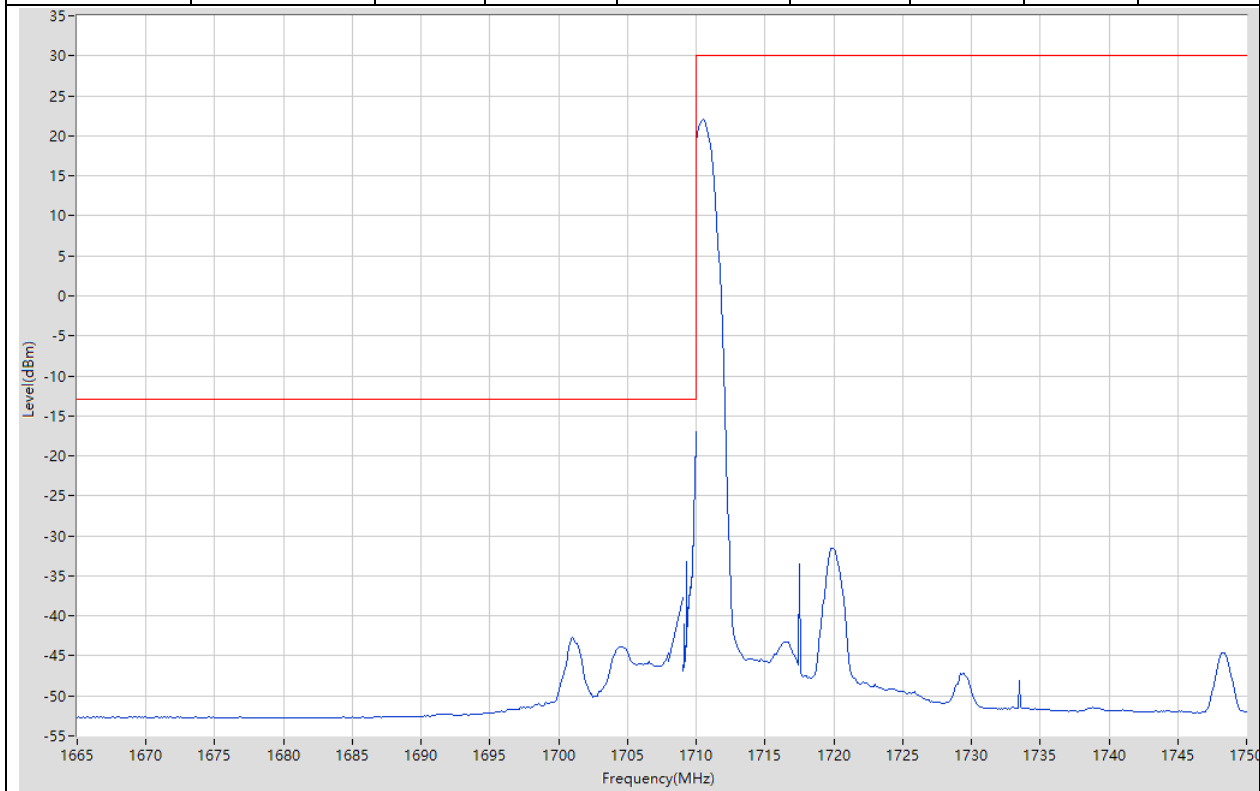


37.6. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:344000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1708 | -30.43 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -28.18 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1709.998 | -32.22 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1716.4 | 10.03 | 30 | Pass | 401 |

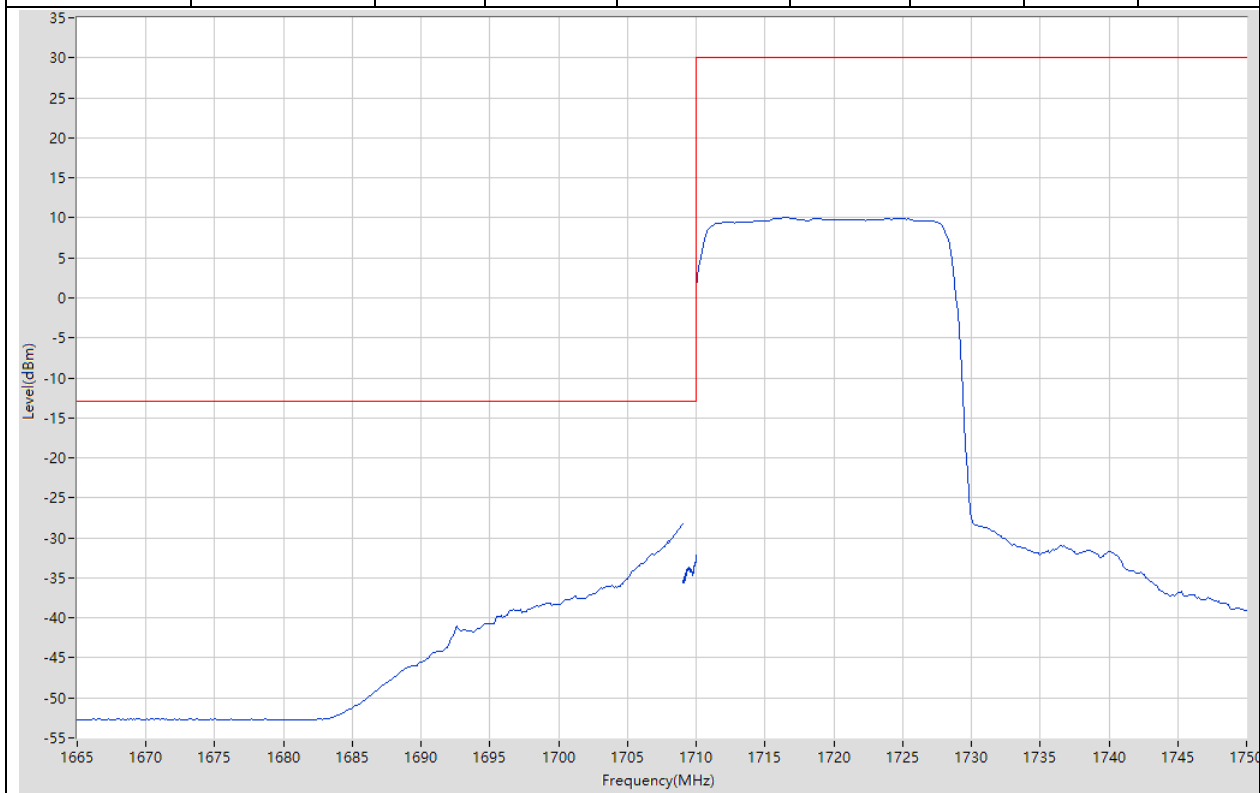


37.7. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:354000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1 @105, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.4 | 21.98 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780 | -18.38 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -37.73 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1789.015 | -41.39 | -13 | Pass | 401 |

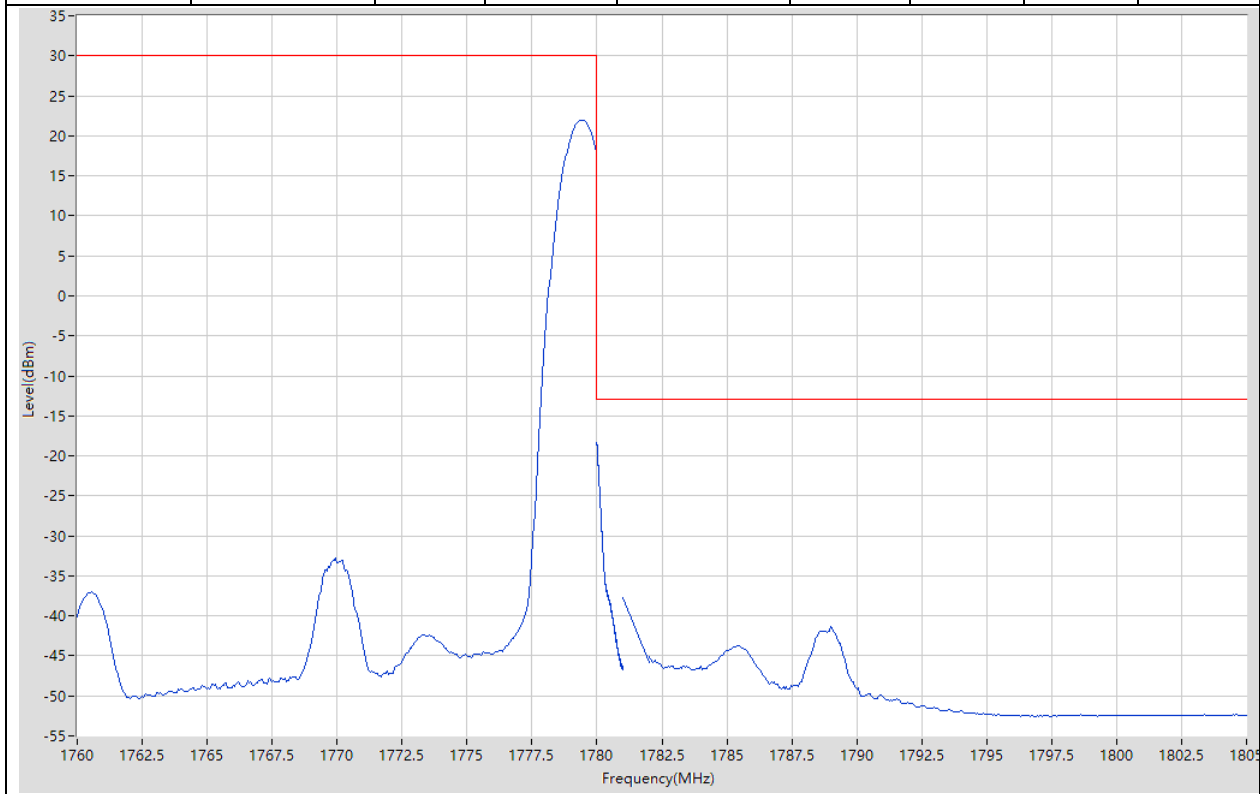


37.8. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:354000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1766.4 | 10.05 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780.14 | -35.42 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -30.46 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782 | -31.56 | -13 | Pass | 401 |

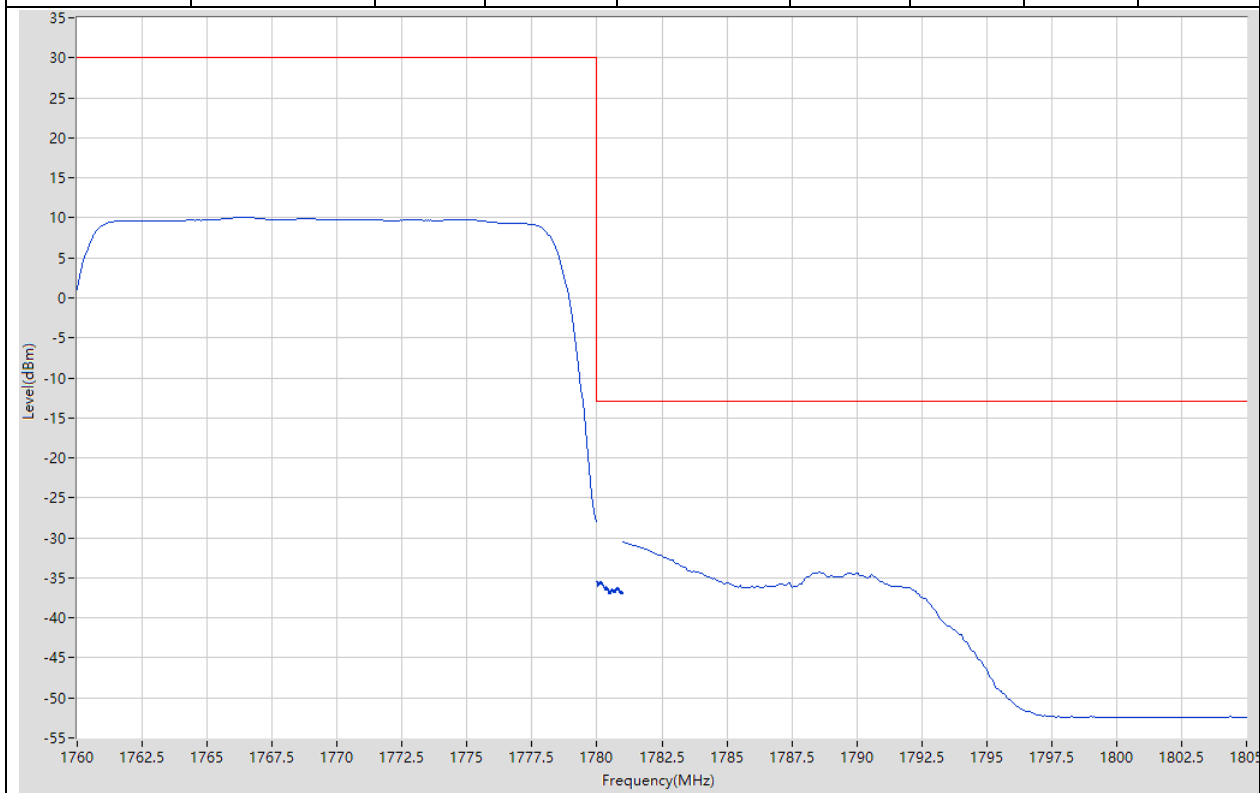


37.9. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:346000, NR BW:40, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1707.893 | -43.76 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -38.85 | -13 | Pass | 2 |
| 1709 | 1710 | 0.4 | RMS | 1710 | -19.36 | -13 | Pass | 4 |
| 1710 | 1750 | 1 | RMS | 1710.6 | 22.28 | 30 | Pass | 401 |

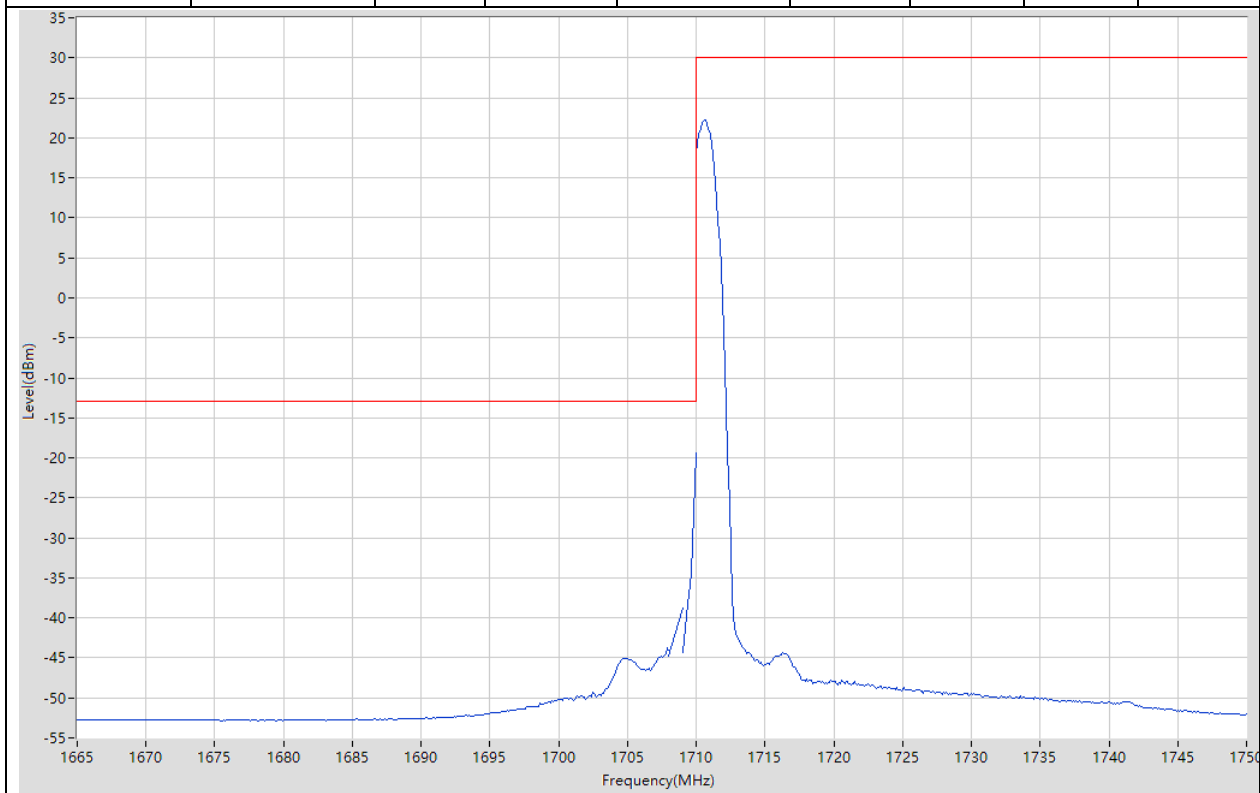


37.10. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:346000, NR BW:40, SCS:15, DFT-s-OFDM, QPSK, NR RB:216@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1707.893 | -35.21 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -34.18 | -13 | Pass | 2 |
| 1709 | 1710 | 0.39 | RMS | 1710 | -31.83 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1740.5 | 6.77 | 30 | Pass | 401 |

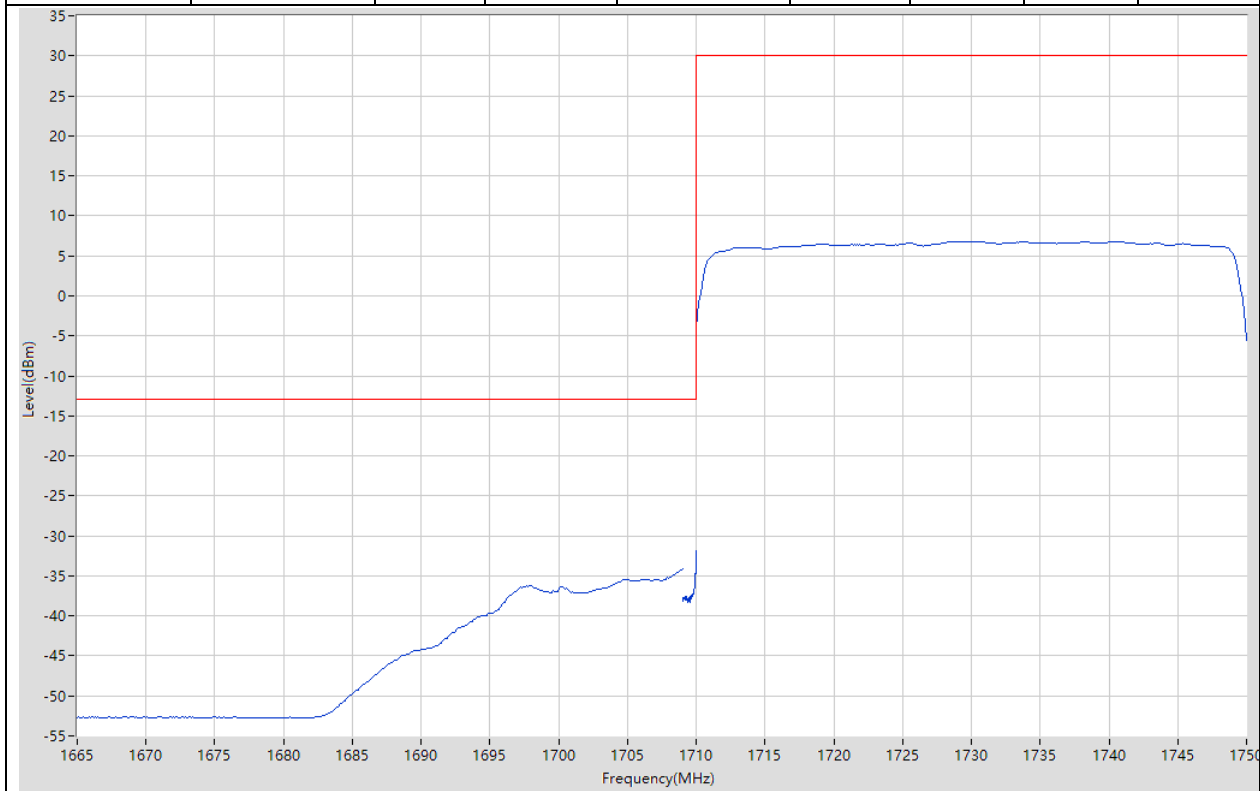


37.11. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:352000, NR BW:40, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@215, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.3 | 21.82 | 30 | Pass | 401 |
| 1780 | 1781 | 0.4 | RMS | 1780 | -20.86 | -13 | Pass | 4 |
| 1781 | 1782 | 1 | RMS | 1781 | -41.6 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782 | -46.79 | -13 | Pass | 401 |

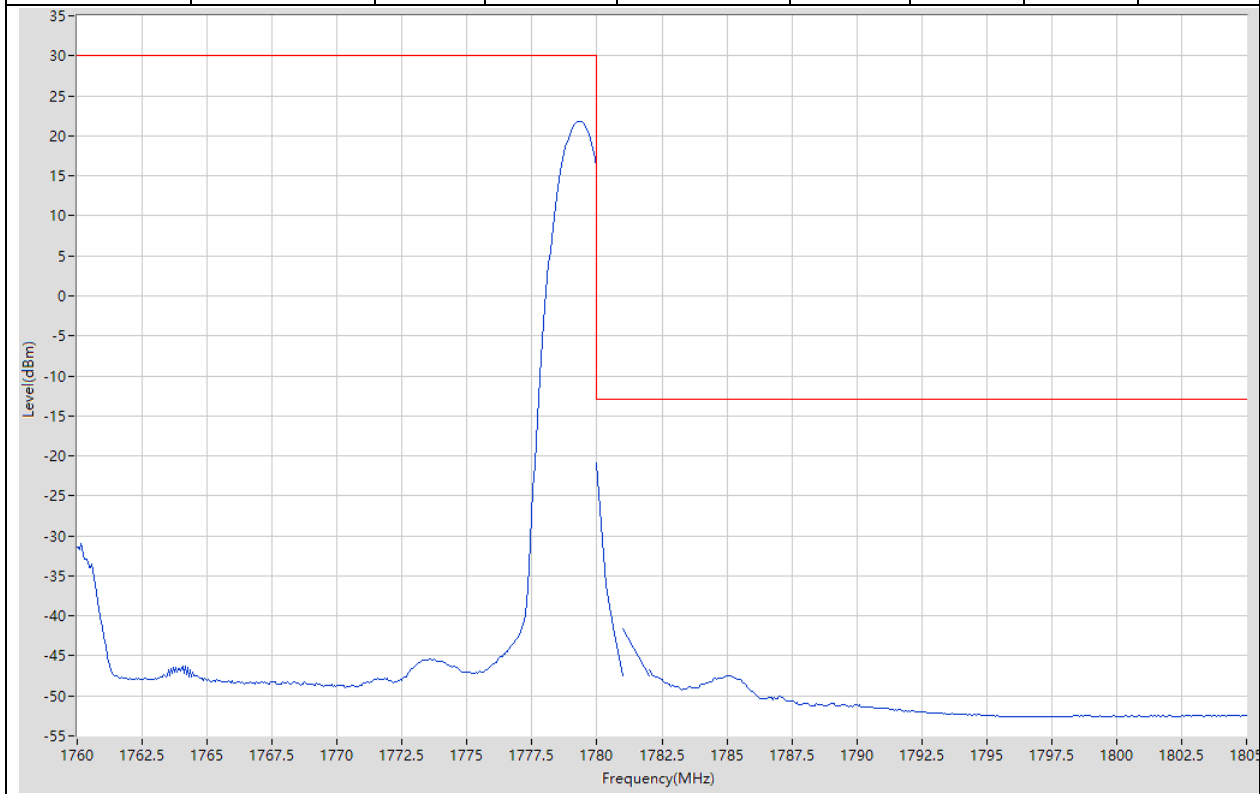


37.12. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:352000, NR BW:40, SCS:15, DFT-s-OFDM, QPSK, NR RB:216@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1760.1 | 6.92 | 30 | Pass | 401 |
| 1780 | 1781 | 0.39 | RMS | 1780 | -32.72 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -34.08 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1789.188 | -33 | -13 | Pass | 401 |

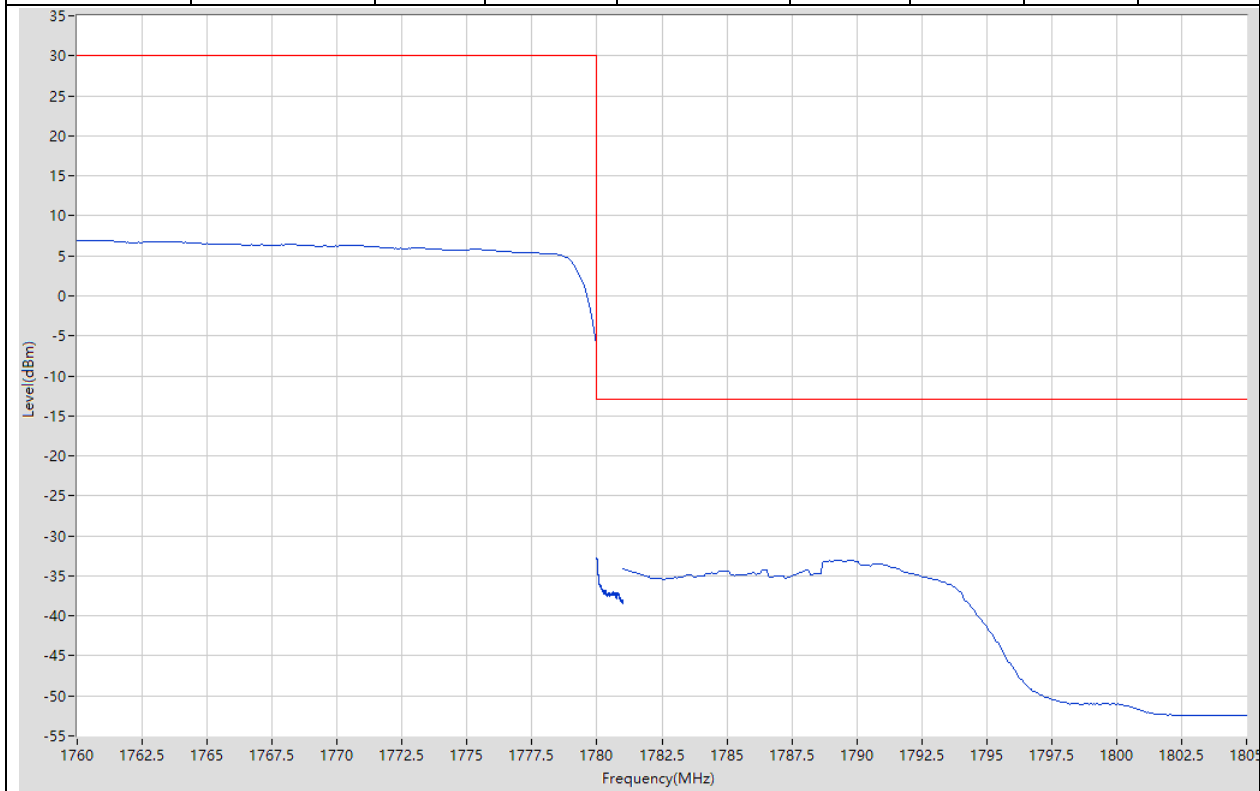


37.13. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:342500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1708 | -41.48 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -39.81 | -13 | Pass | 2 |
| 1709 | 1710 | 0.051 | RMS | 1710 | -19.43 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1710.3 | 20.93 | 30 | Pass | 401 |

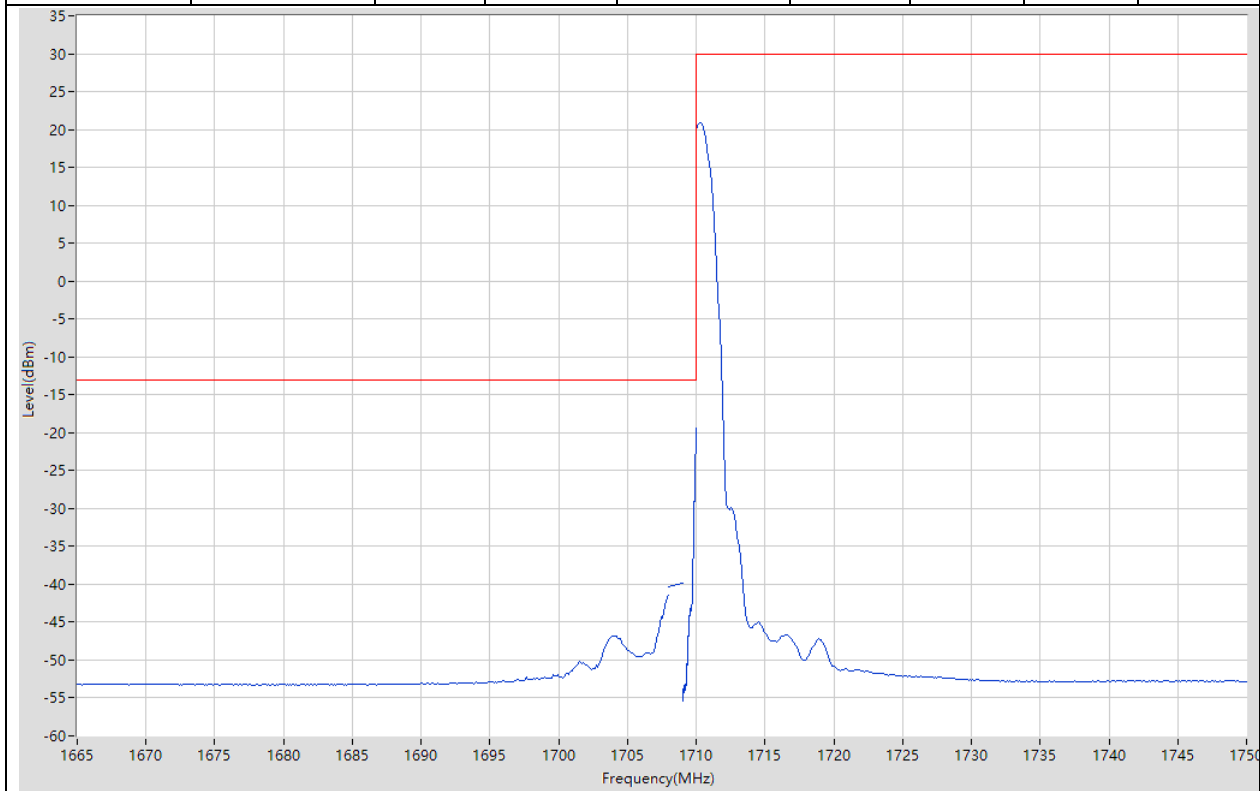


37.14. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:342500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1708 | -31.94 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -29.74 | -13 | Pass | 2 |
| 1709 | 1710 | 0.051 | RMS | 1710 | -31.27 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1712.2 | 14.61 | 30 | Pass | 401 |

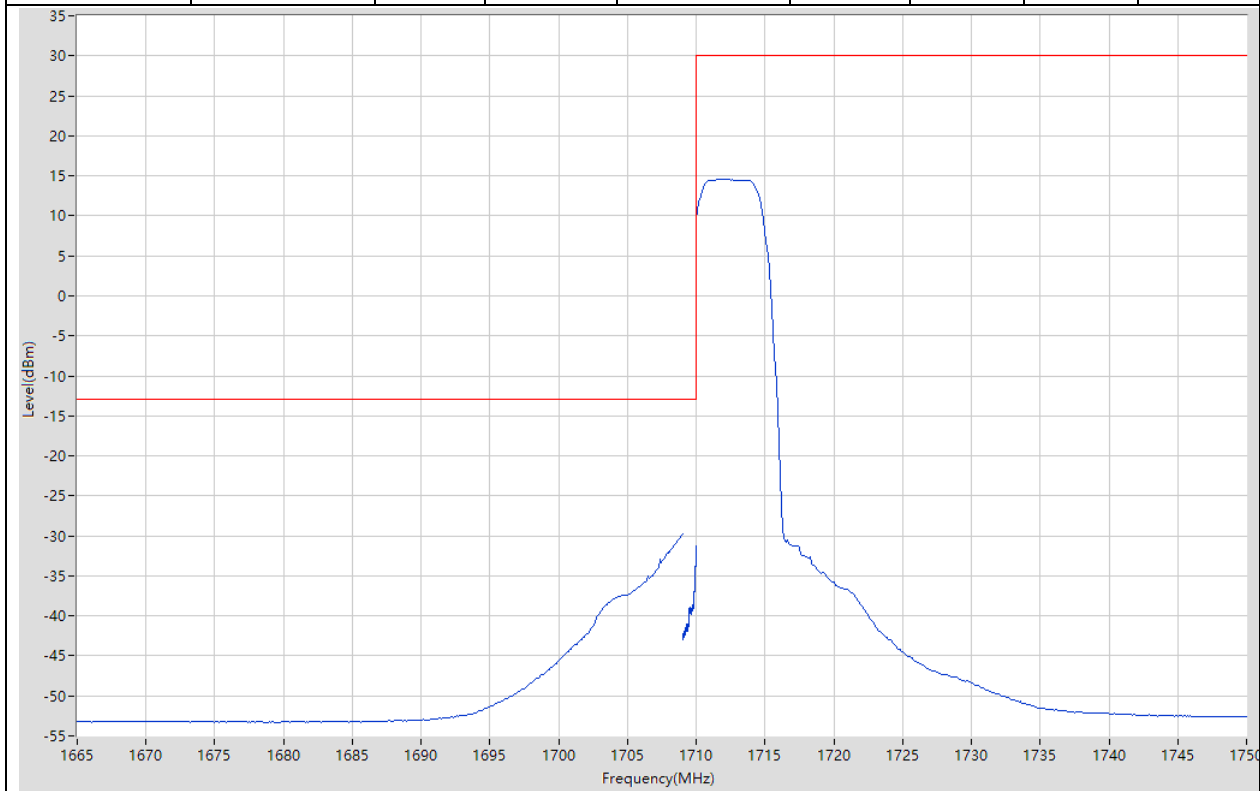


37.15. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:355500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@24, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.6 | 20.77 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780 | -18.28 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -38.64 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782.058 | -39.77 | -13 | Pass | 401 |

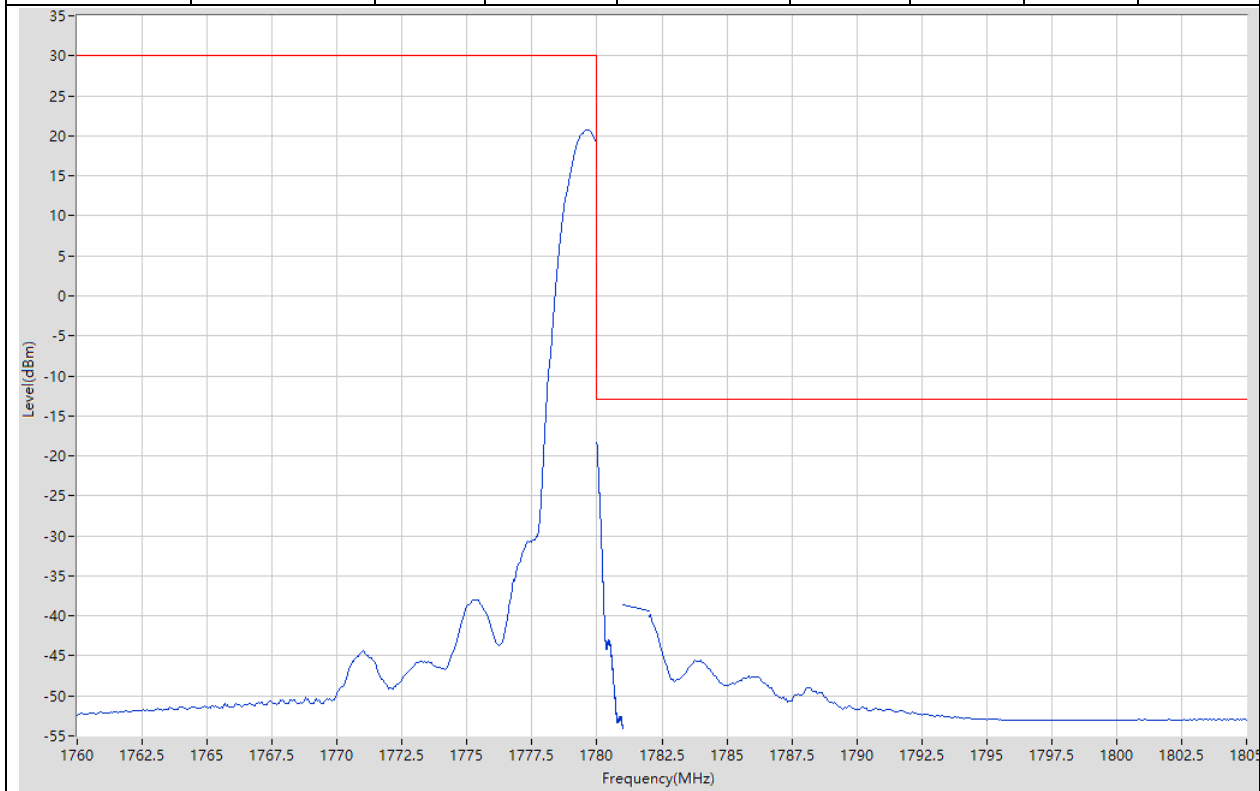


37.16. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:355500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1777.5 | 14.54 | 30 | Pass | 401 |
| 1780 | 1781 | 0.051 | RMS | 1780 | -30.63 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -32.69 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782.115 | -34.56 | -13 | Pass | 401 |

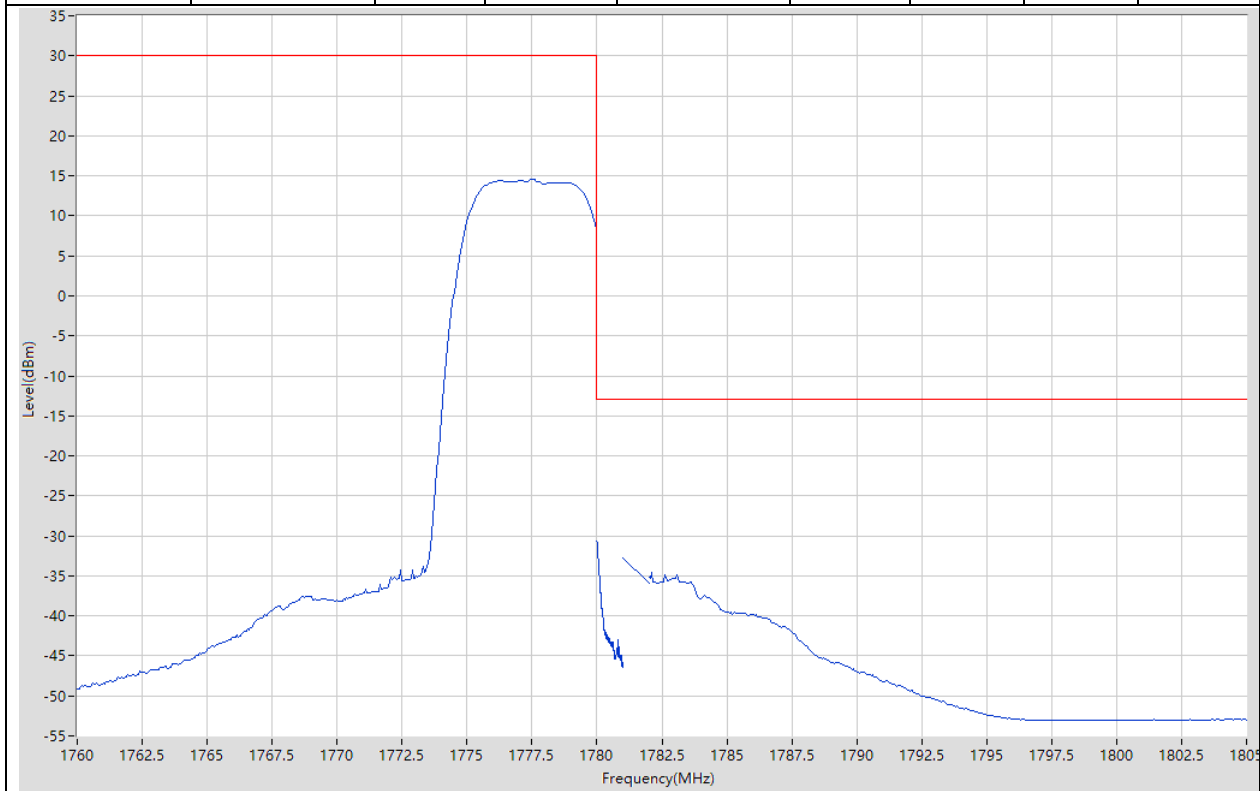


37.17. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:344000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1700.905 | -41.94 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -40.11 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1710 | -20.25 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1710.5 | 20.79 | 30 | Pass | 401 |

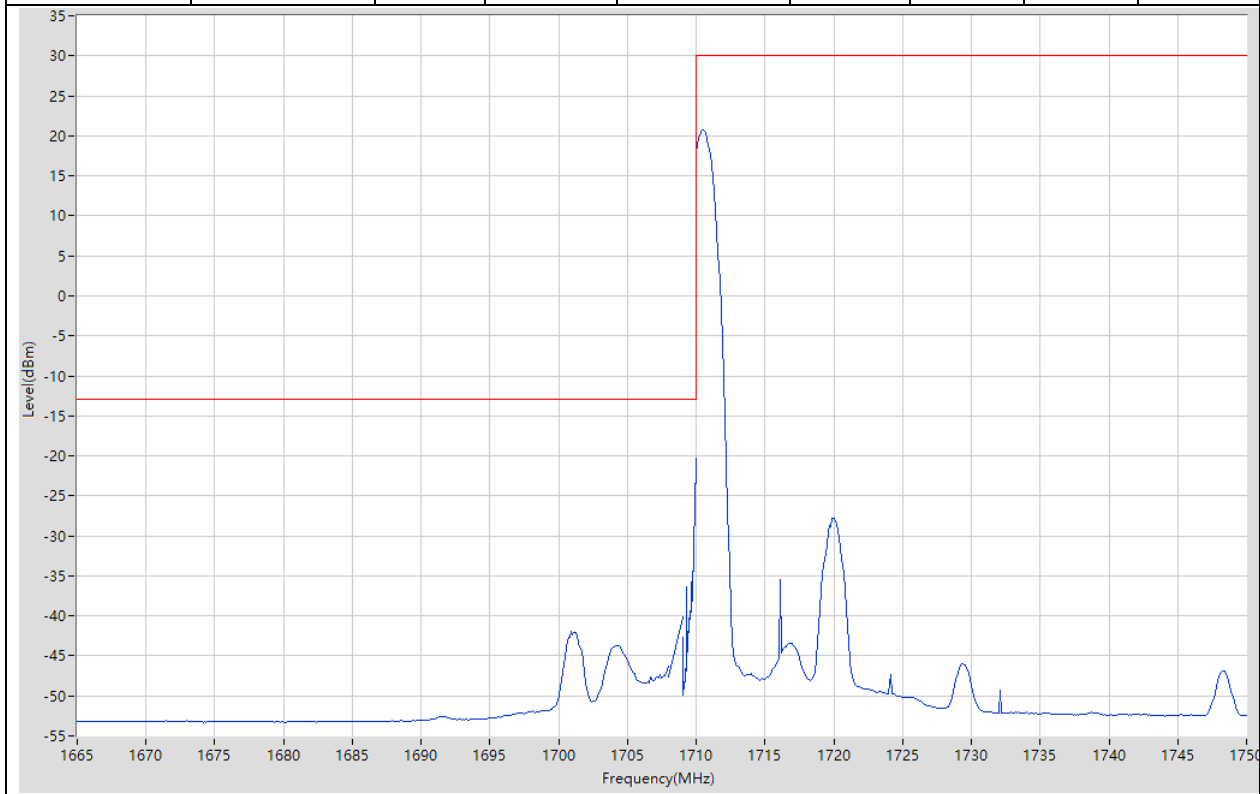


37.18. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:344000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1708 | -31.49 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -30.55 | -13 | Pass | 2 |
| 1709 | 1710 | 0.2 | RMS | 1709.998 | -34.31 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1720.1 | 8.93 | 30 | Pass | 401 |

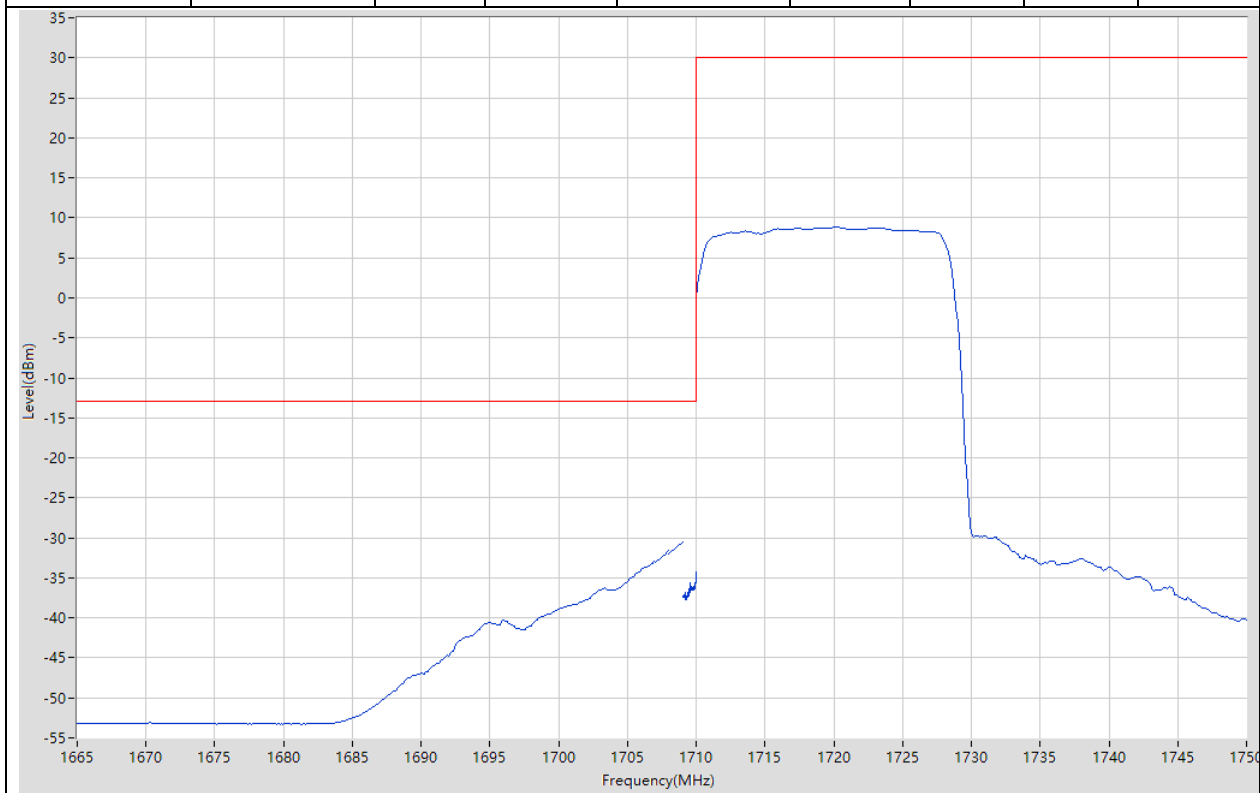


37.19. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:354000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@105, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.4 | 20.6 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780 | -19.79 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -39.91 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1788.728 | -42.2 | -13 | Pass | 401 |

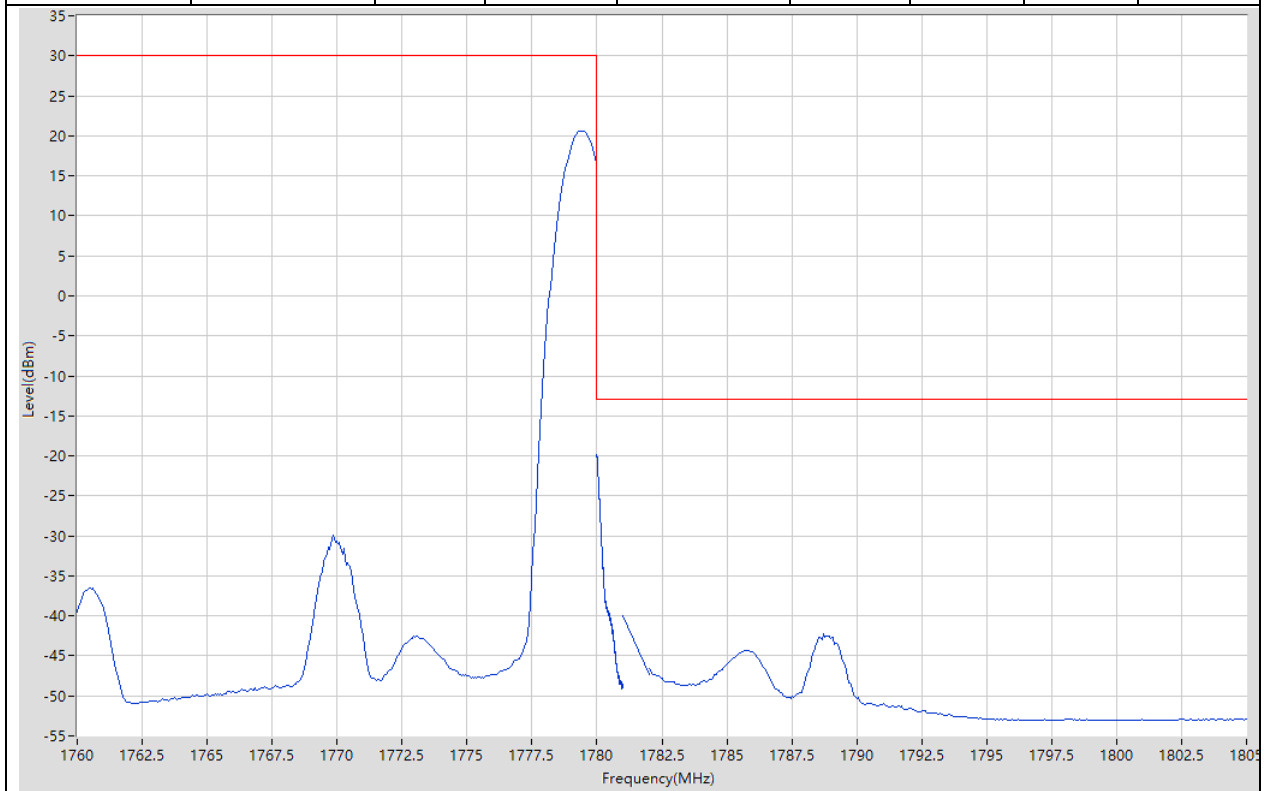


37.20. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:354000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1770.15 | 8.7 | 30 | Pass | 401 |
| 1780 | 1781 | 0.2 | RMS | 1780.068 | -37.95 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -32.98 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1782 | -33.73 | -13 | Pass | 401 |

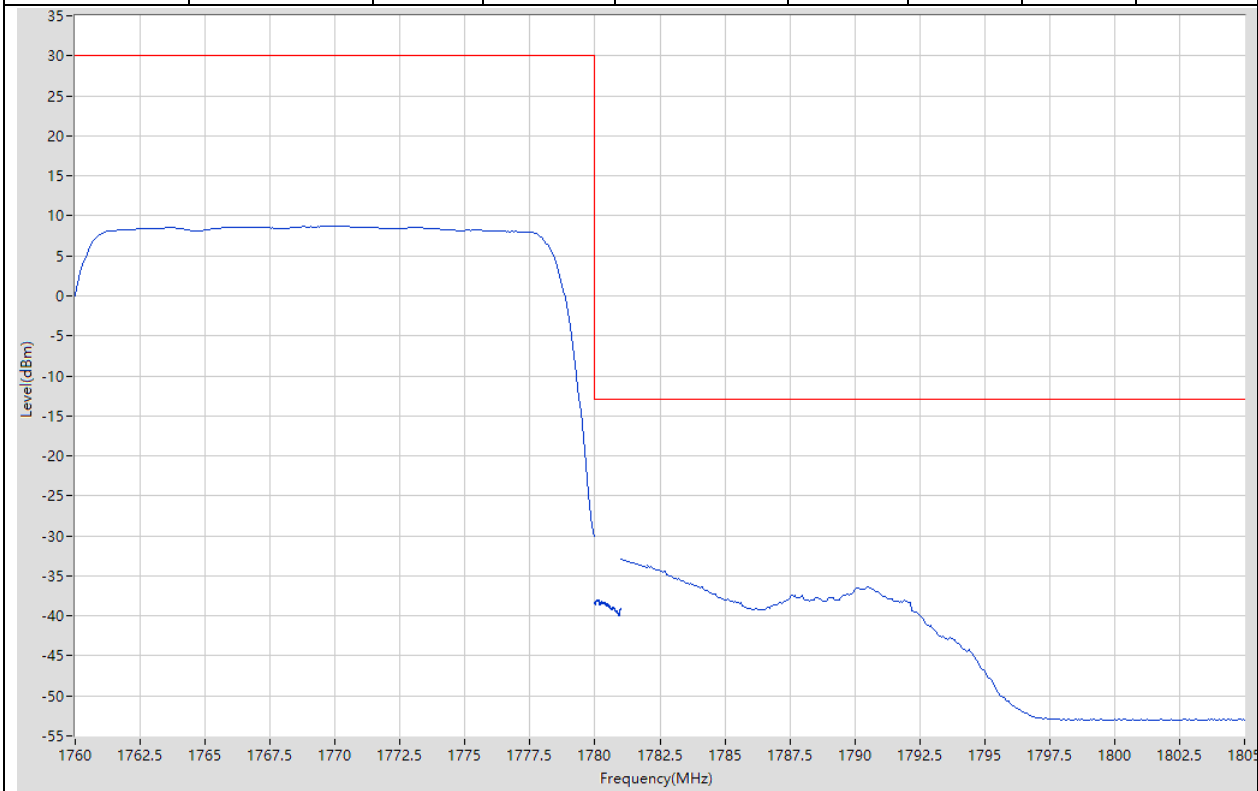


37.21. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:346000, NR BW:40, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1704.13 | -42.76 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -39.41 | -13 | Pass | 2 |
| 1709 | 1710 | 0.4 | RMS | 1710 | -20.79 | -13 | Pass | 4 |
| 1710 | 1750 | 1 | RMS | 1710.6 | 21.13 | 30 | Pass | 401 |

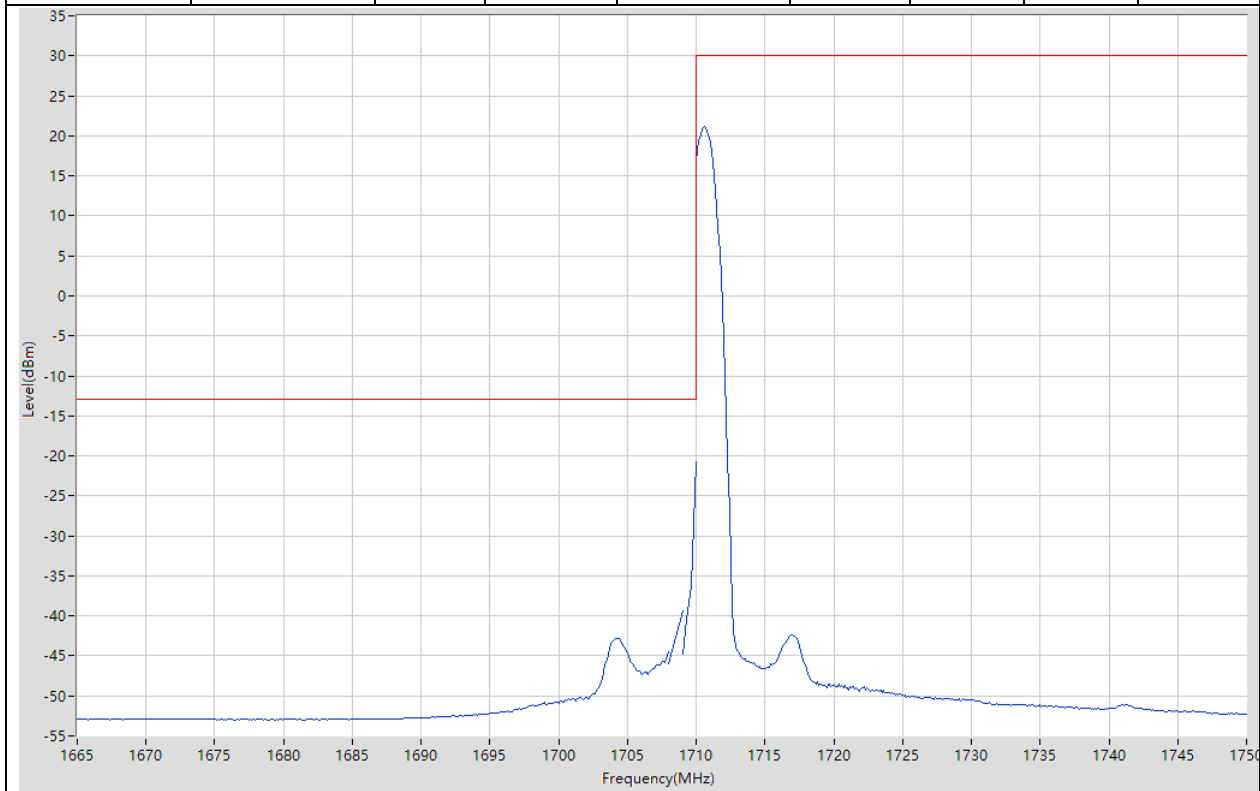


37.22. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:346000, NR BW:40, SCS:15, DFT-s-OFDM, 16QAM, NR RB:216@0, LTE Ch:20850, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1665 | 1708 | 1 | RMS | 1707.893 | -35.72 | -13 | Pass | 401 |
| 1708 | 1709 | 1 | RMS | 1709 | -35.49 | -13 | Pass | 2 |
| 1709 | 1710 | 0.39 | RMS | 1710 | -32.98 | -13 | Pass | 401 |
| 1710 | 1750 | 1 | RMS | 1737 | 5.7 | 30 | Pass | 401 |

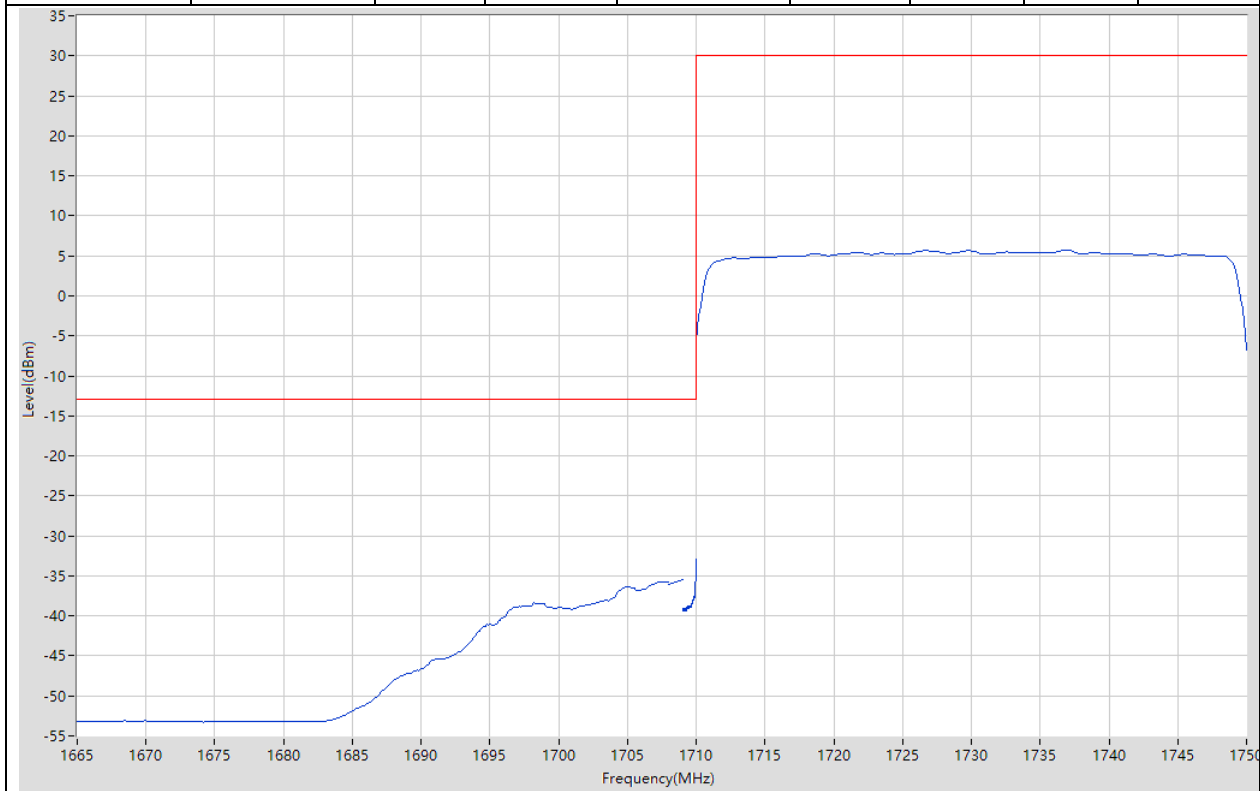


37.23. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:352000, NR BW:40, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1 @215, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1779.3 | 21.2 | 30 | Pass | 401 |
| 1780 | 1781 | 0.4 | RMS | 1780 | -20.7 | -13 | Pass | 4 |
| 1781 | 1782 | 1 | RMS | 1781 | -42.26 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1785.853 | -45.81 | -13 | Pass | 401 |

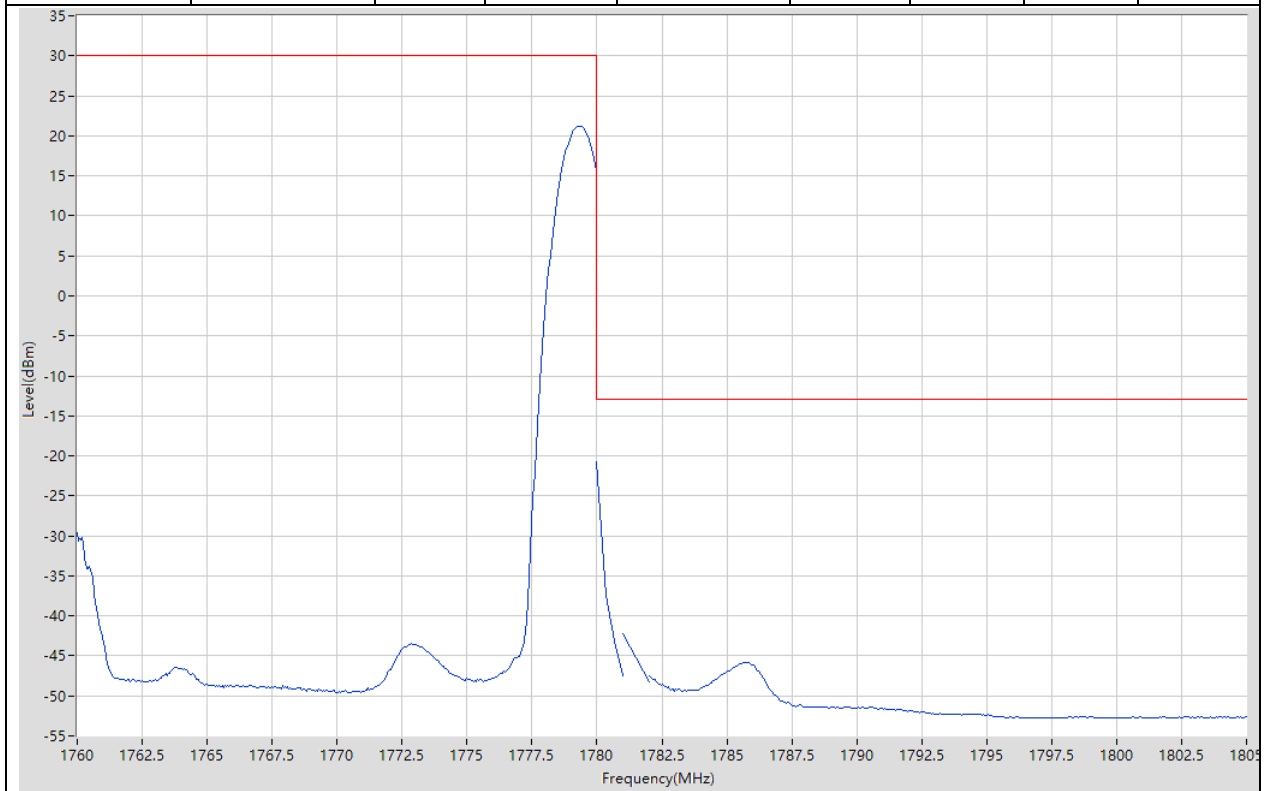

37.24. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:352000, NR BW:40, SCS:15, DFT-s-OFDM, 16QAM, NR RB:216@0, LTE Ch:21350, LTE BW:20, QPSK, LTE RB:100@0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 1760 | 1780 | 1 | RMS | 1760 | 5.69 | 30 | Pass | 401 |
| 1780 | 1781 | 0.39 | RMS | 1780 | -34.3 | -13 | Pass | 401 |
| 1781 | 1782 | 1 | RMS | 1781 | -35.62 | -13 | Pass | 2 |
| 1782 | 1805 | 1 | RMS | 1791.258 | -35.59 | -13 | Pass | 401 |

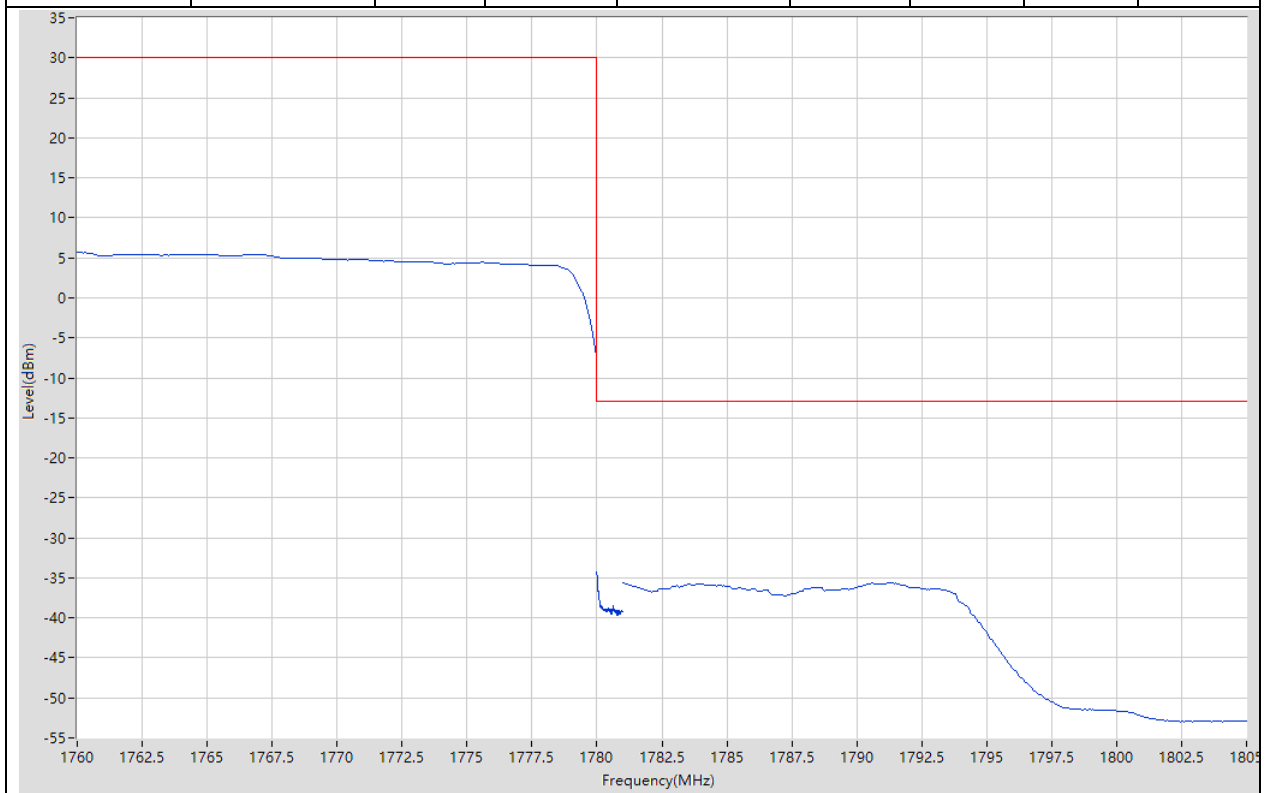

38. DC_25A_n41A_SCS30


38.1. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -40.31 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -26.33 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2496 | -25.65 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 22.22 | 30 | Pass | 401 |

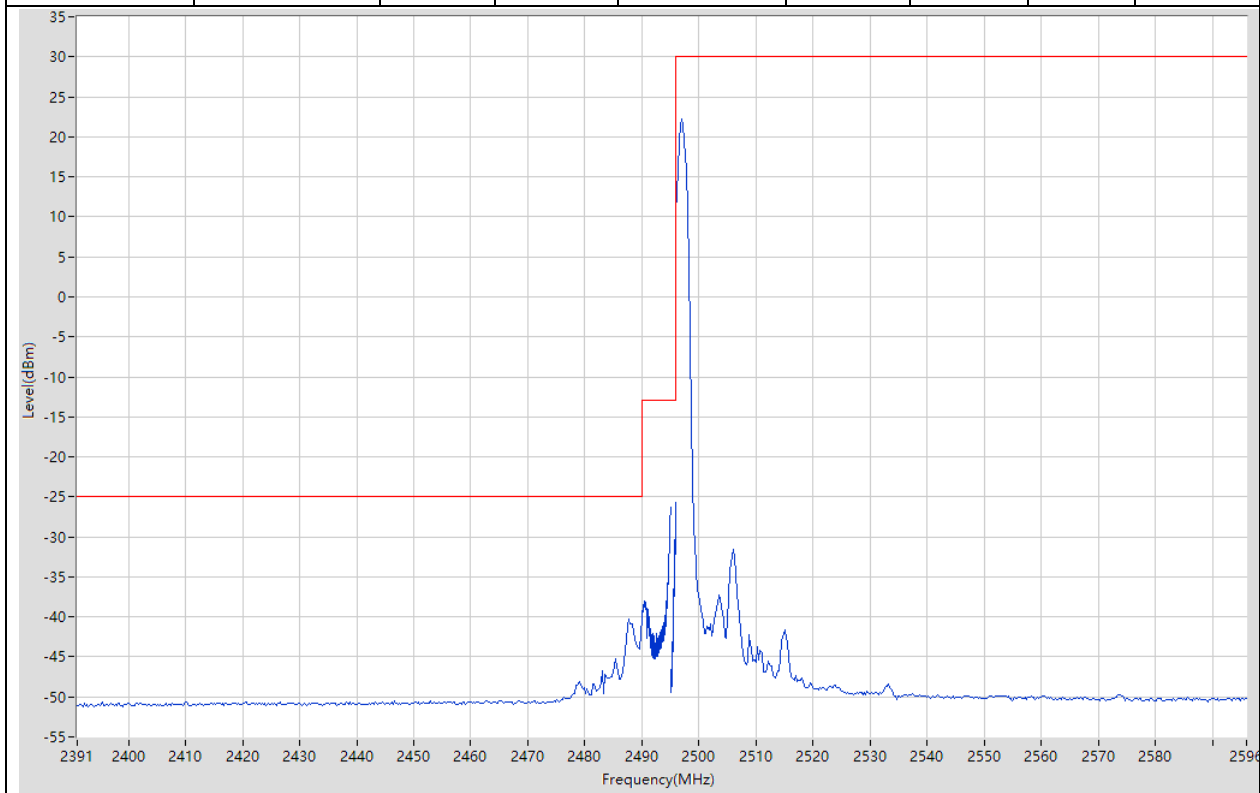


38.2. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:50@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -41.97 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.988 | -29.87 | -13 | Pass | 401 |
| 2495 | 2496 | 0.4 | RMS | 2496 | -32.28 | -13 | Pass | 4 |
| 2496 | 2596 | 1 | RMS | 2510.5 | 10.68 | 30 | Pass | 401 |

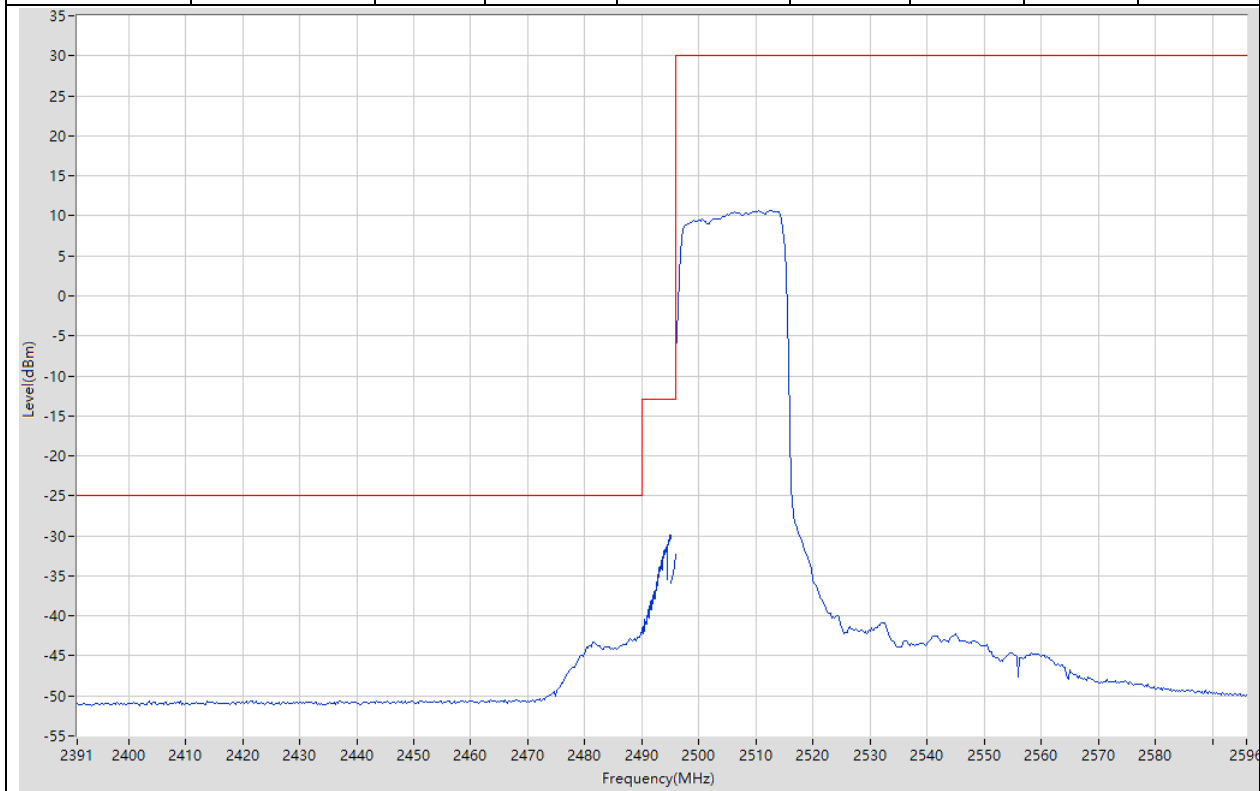


38.3. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:1 @50, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.58 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.003 | -22.09 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -26.2 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2697.85 | -38.34 | -13 | Pass | 401 |
| 2710 | 2795 | 1 | RMS | 2710.638 | -49.04 | -25 | Pass | 401 |

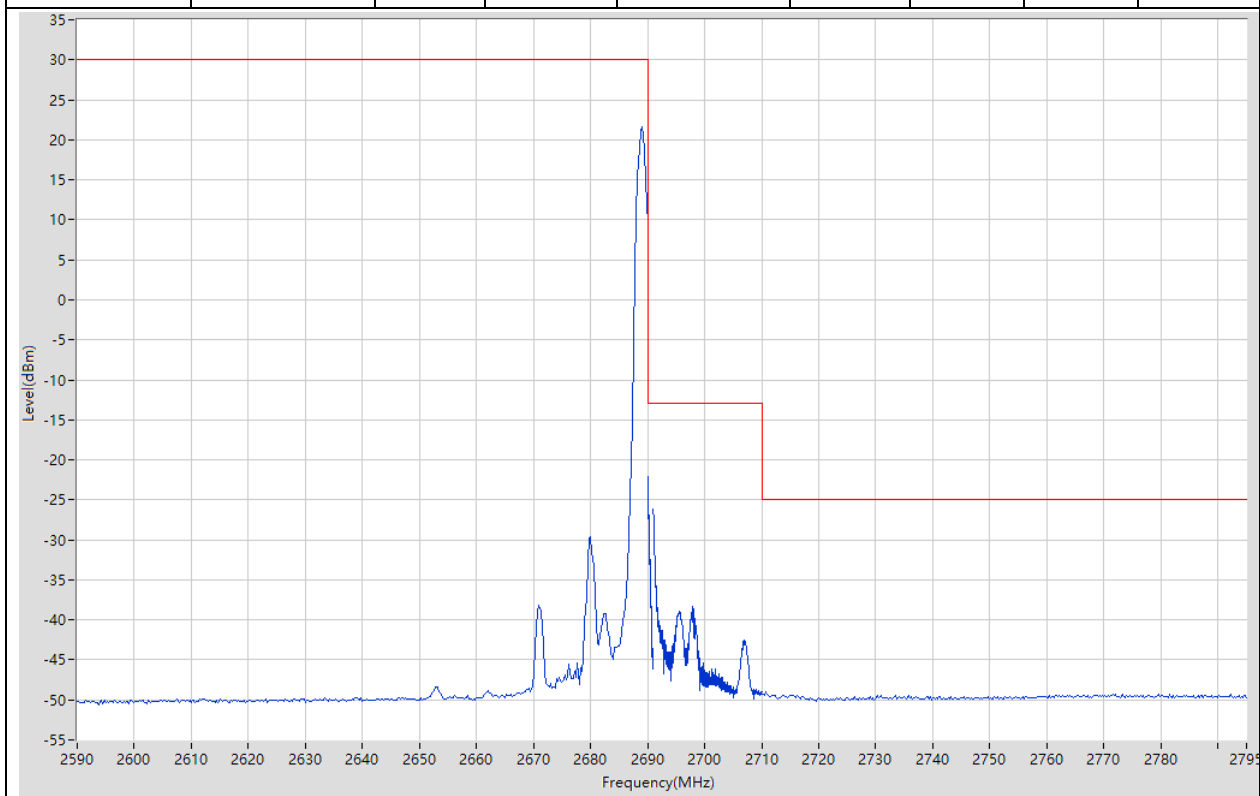


38.4. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:50@0, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2679.75 | 10.01 | 30 | Pass | 401 |
| 2690 | 2691 | 0.4 | RMS | 2690 | -33.93 | -13 | Pass | 4 |
| 2691 | 2695 | 1 | RMS | 2691.11 | -29.61 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2695.225 | -35.57 | -13 | Pass | 401 |
| 2710 | 2715 | 1 | RMS | 2715 | -40.05 | -25 | Pass | 401 |
| 2715 | 2795 | 1 | RMS | 2715.4 | -40.05 | -25 | Pass | 401 |

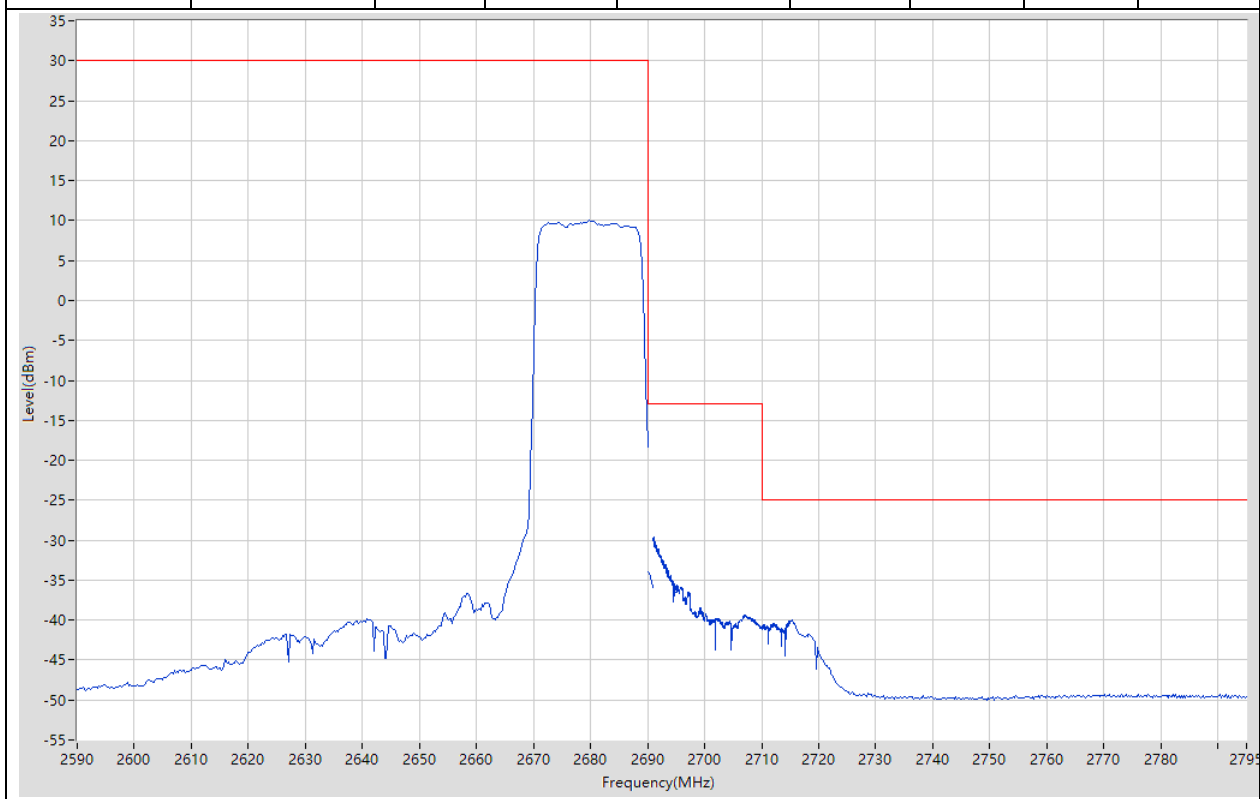


38.5. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -42.71 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -27.03 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2496 | -25.76 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 22.14 | 30 | Pass | 401 |

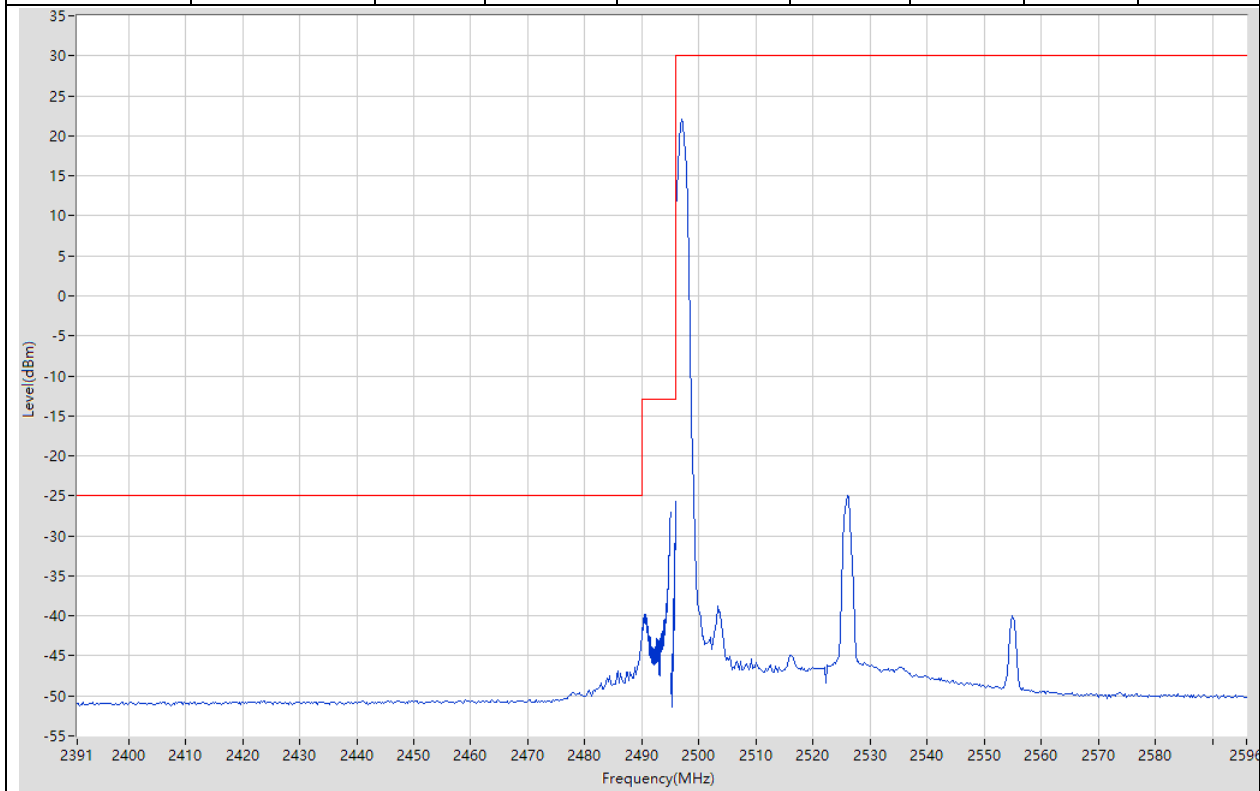


38.6. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:162@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2481.833 | -32.68 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.075 | -25.76 | -13 | Pass | 401 |
| 2495 | 2496 | 1.2 | RMS | 2496 | -27.68 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2546.25 | 5.97 | 30 | Pass | 401 |

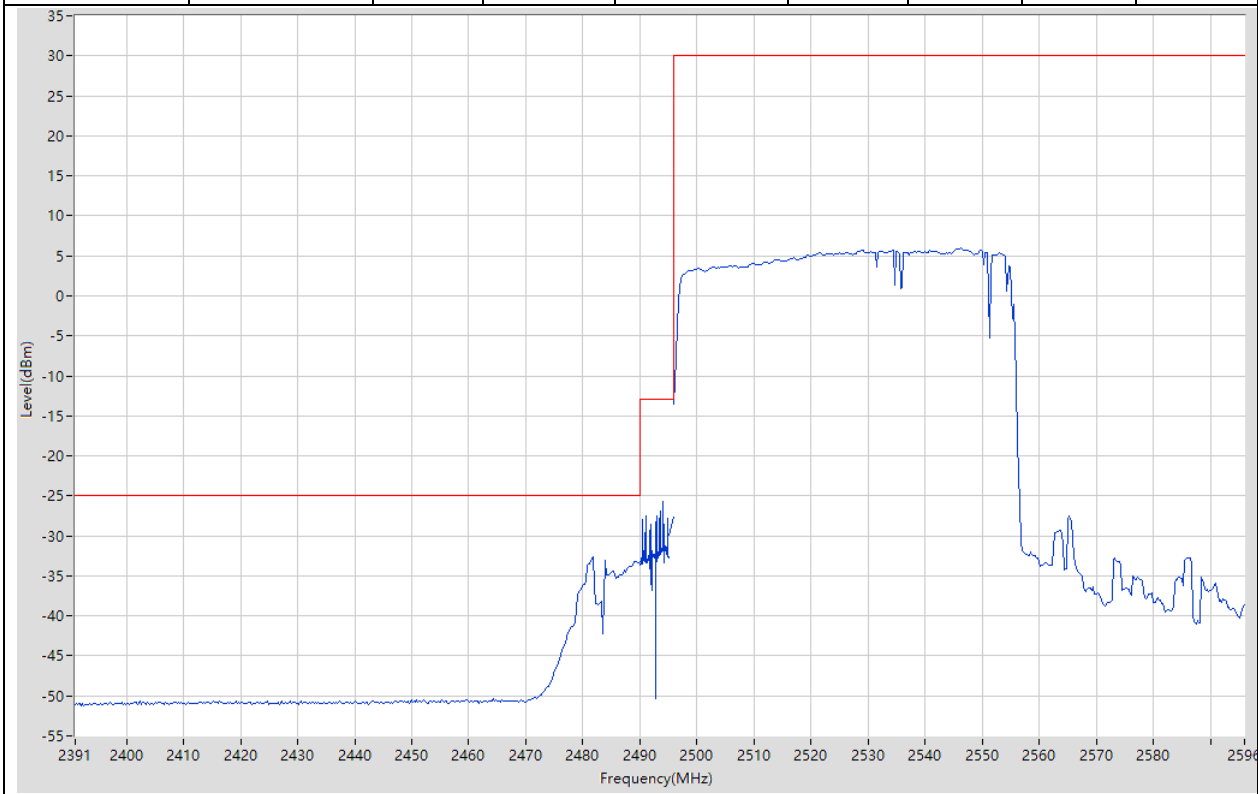

38.7. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@161, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.69 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.003 | -23.95 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -28.46 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2717.963 | -40.17 | -13 | Pass | 401 |
| 2750 | 2795 | 1 | RMS | 2773.625 | -49.17 | -25 | Pass | 401 |

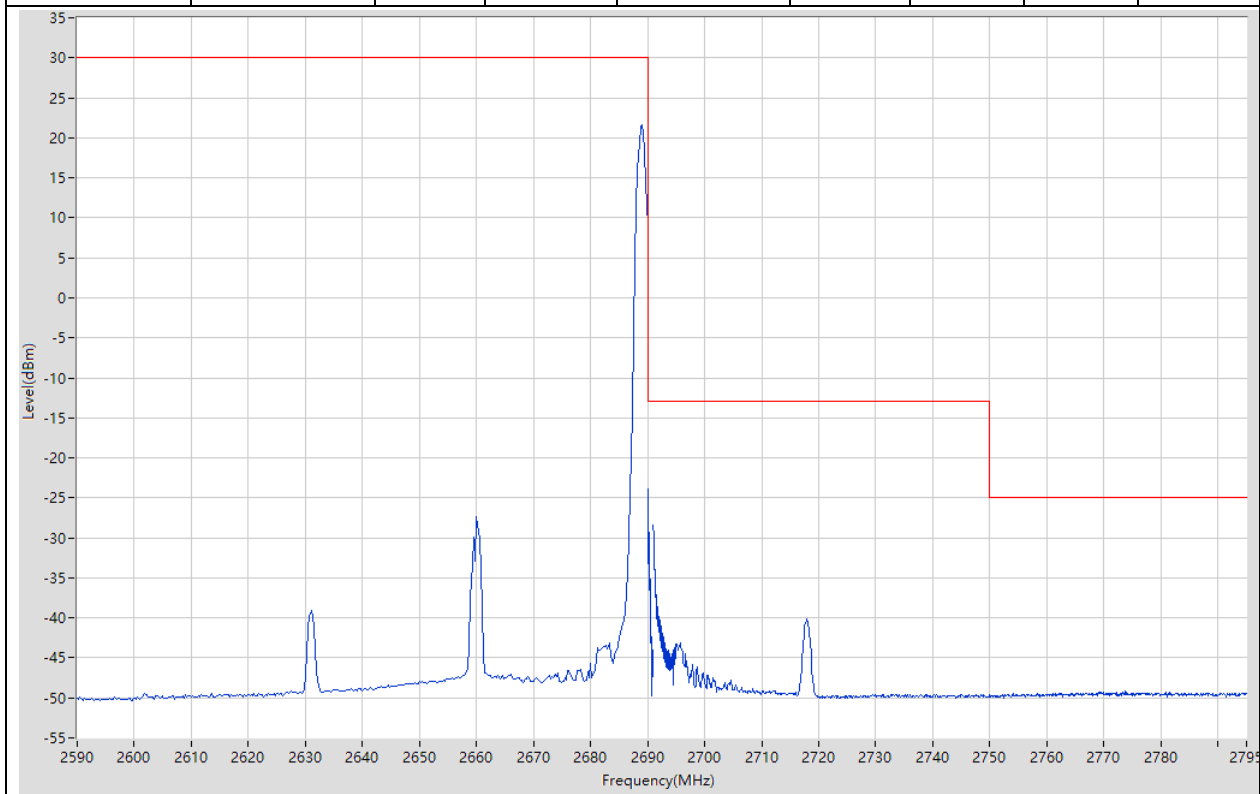


38.8. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:162@0, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2634.25 | 5.52 | 30 | Pass | 401 |
| 2690 | 2691 | 1.2 | RMS | 2690 | -27.86 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2691.09 | -33.76 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2695.275 | -35.53 | -13 | Pass | 401 |
| 2750 | 2755 | 1 | RMS | 2754.063 | -49.47 | -25 | Pass | 401 |
| 2755 | 2795 | 1 | RMS | 2763.1 | -49.3 | -25 | Pass | 401 |




38.9. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.763 | -44.99 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.23 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.988 | -27.08 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 22.22 | 30 | Pass | 401 |

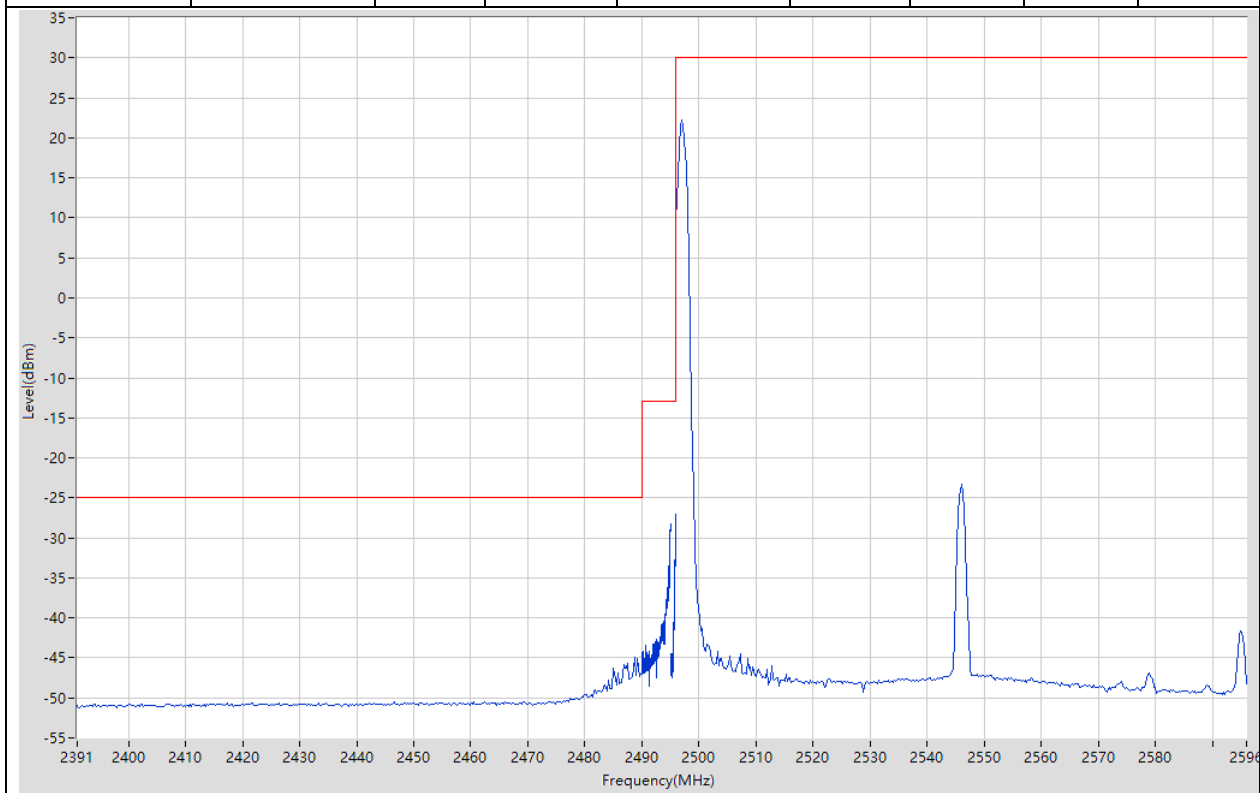


38.10. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:270@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -36.45 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.075 | -36.26 | -13 | Pass | 401 |
| 2495 | 2496 | 1 | RMS | 2496 | -33.48 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2560.25 | 3.89 | 30 | Pass | 401 |

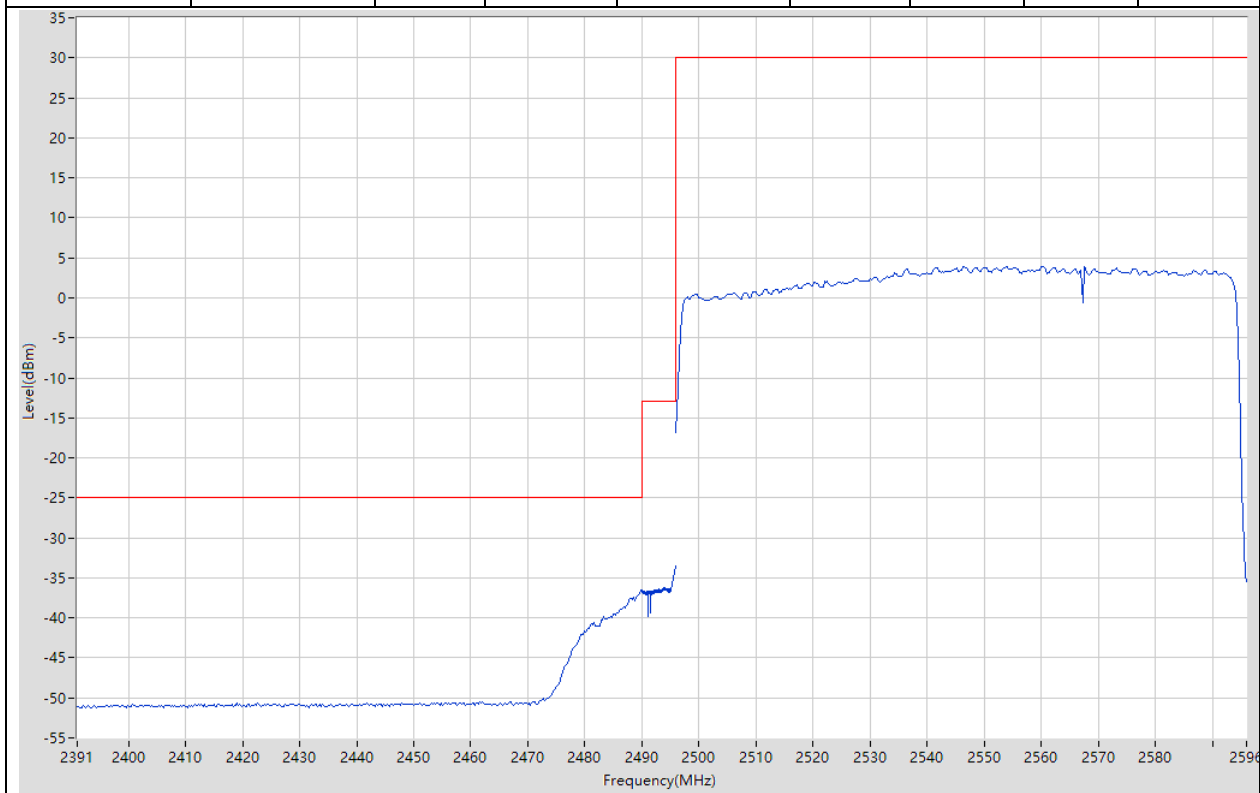


38.11. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@272, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.92 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690 | -23.93 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -28.34 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2695.475 | -43.96 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2791.45 | -49.29 | -25 | Pass | 401 |

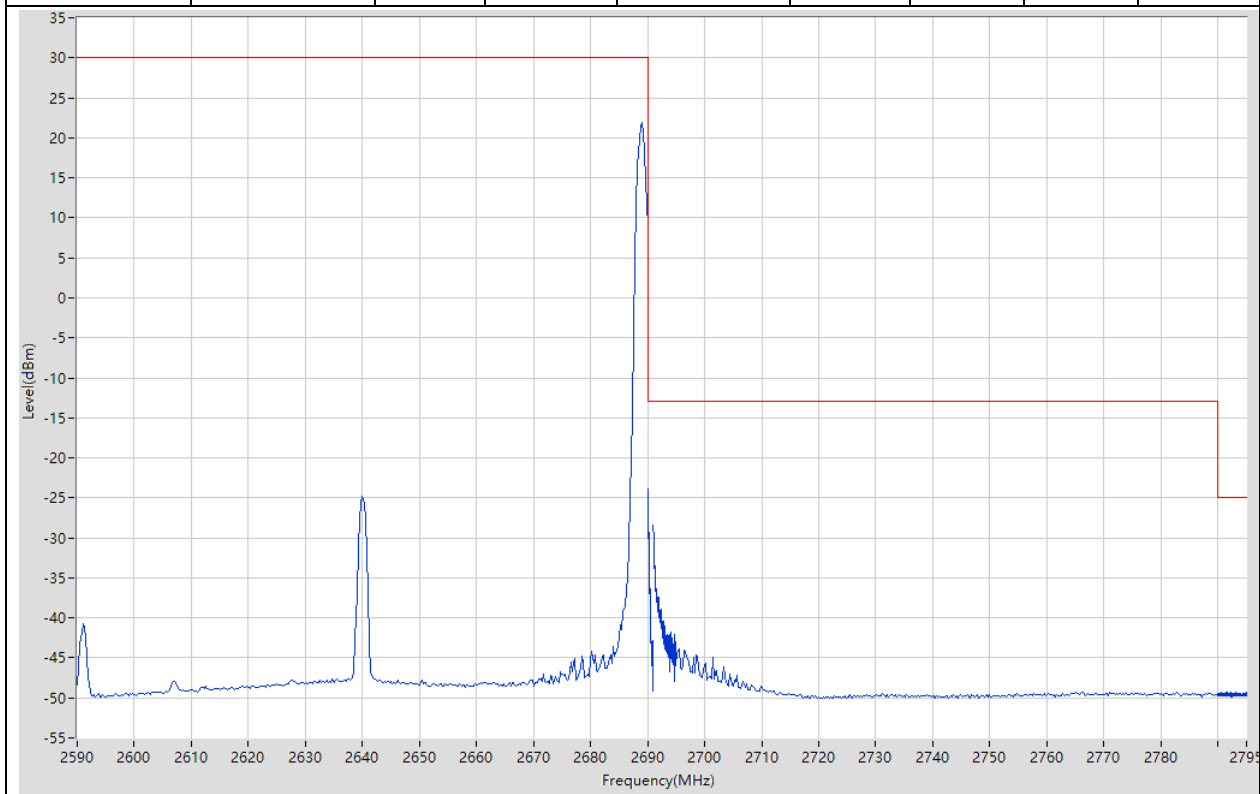


38.12. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:270@0, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2634.25 | 3.72 | 30 | Pass | 401 |
| 2690 | 2691 | 2 | RMS | 2690 | -32.56 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2691.59 | -34.98 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2695.95 | -34.79 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2792.763 | -49.36 | -25 | Pass | 401 |

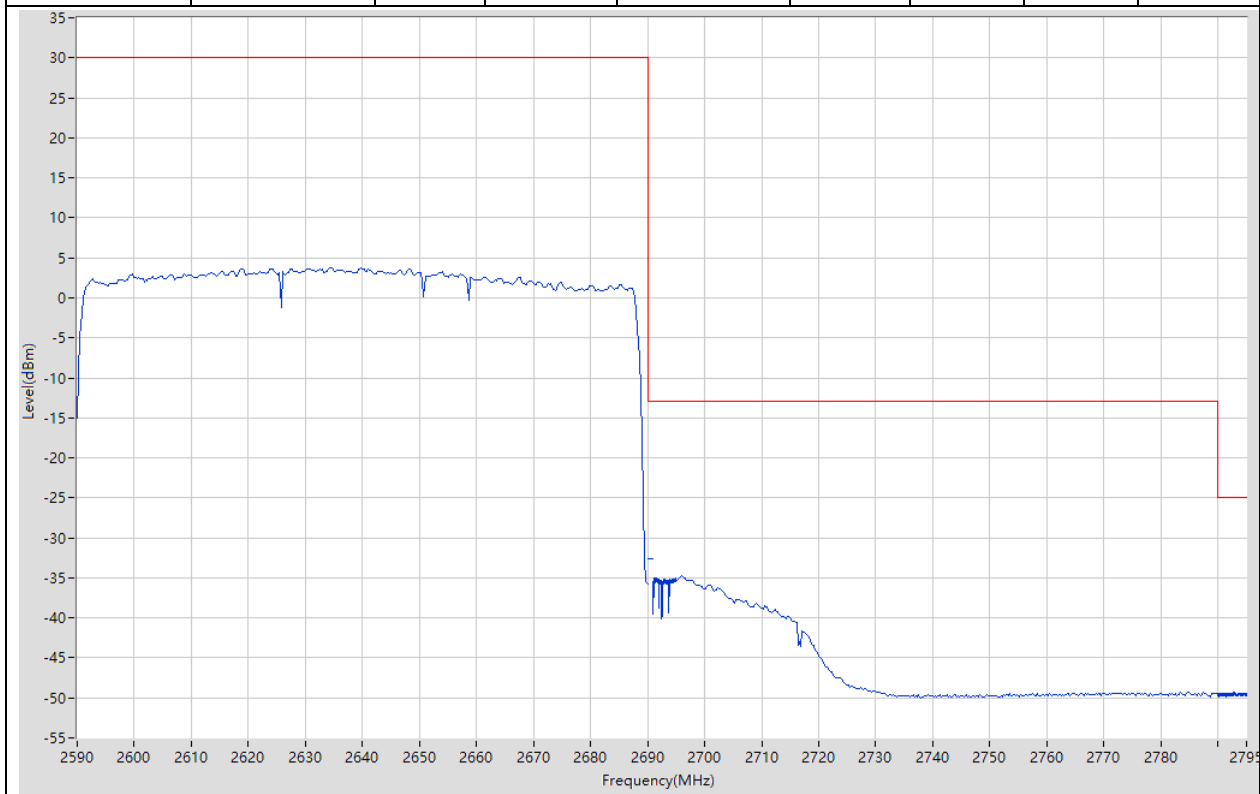


38.13. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.02 | -39.98 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.67 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2496 | -27.87 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 21.08 | 30 | Pass | 401 |

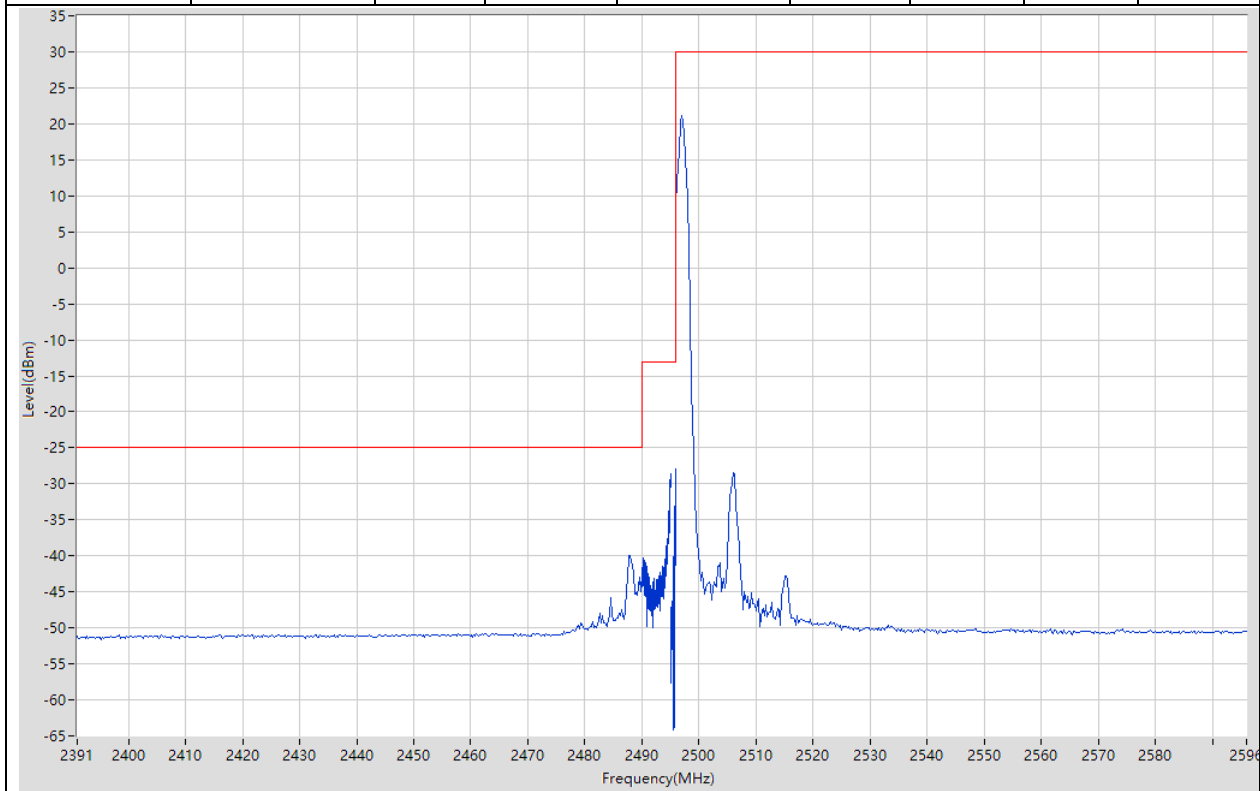


38.14. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:50@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -40.03 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.688 | -31.89 | -13 | Pass | 401 |
| 2495 | 2496 | 0.4 | RMS | 2496 | -32.85 | -13 | Pass | 4 |
| 2496 | 2596 | 1 | RMS | 2512.5 | 9.41 | 30 | Pass | 401 |

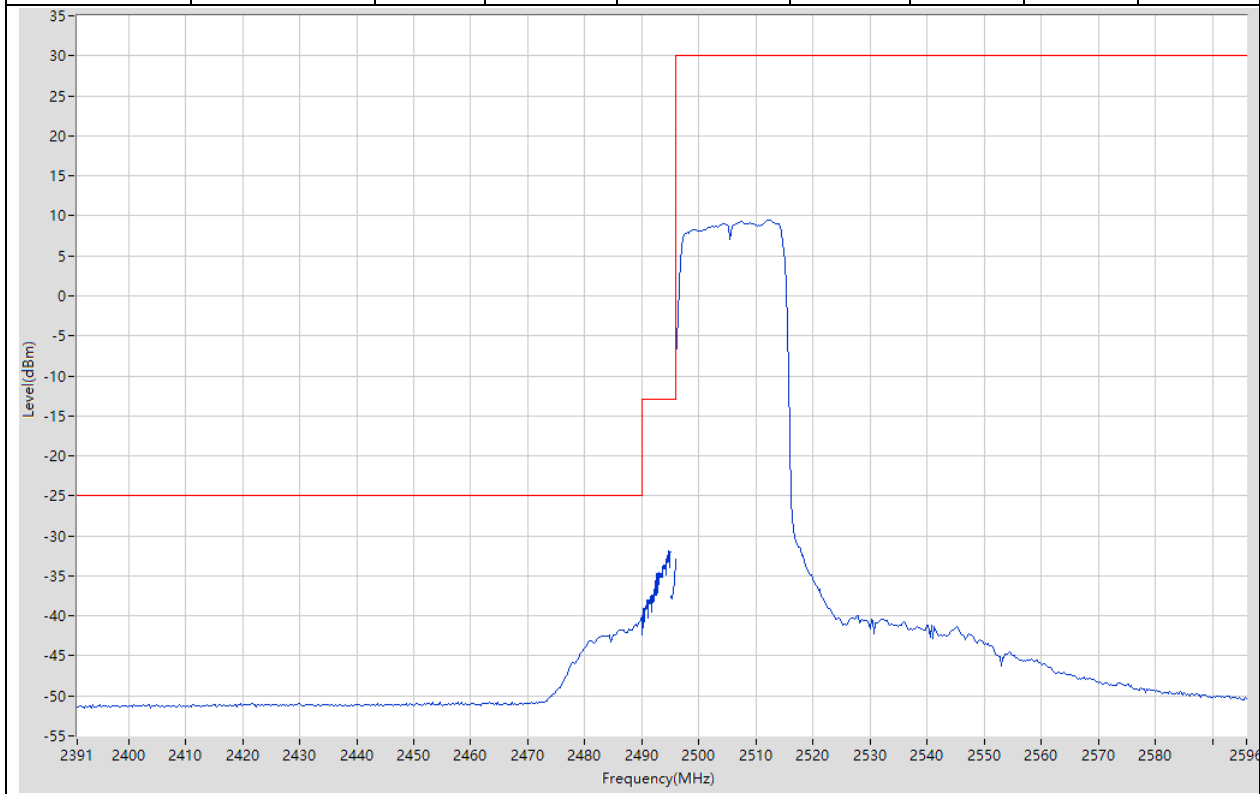


38.15. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@50, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.54 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.015 | -22.4 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -27.5 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2698.038 | -39.72 | -13 | Pass | 401 |
| 2710 | 2795 | 1 | RMS | 2772.475 | -49.49 | -25 | Pass | 401 |

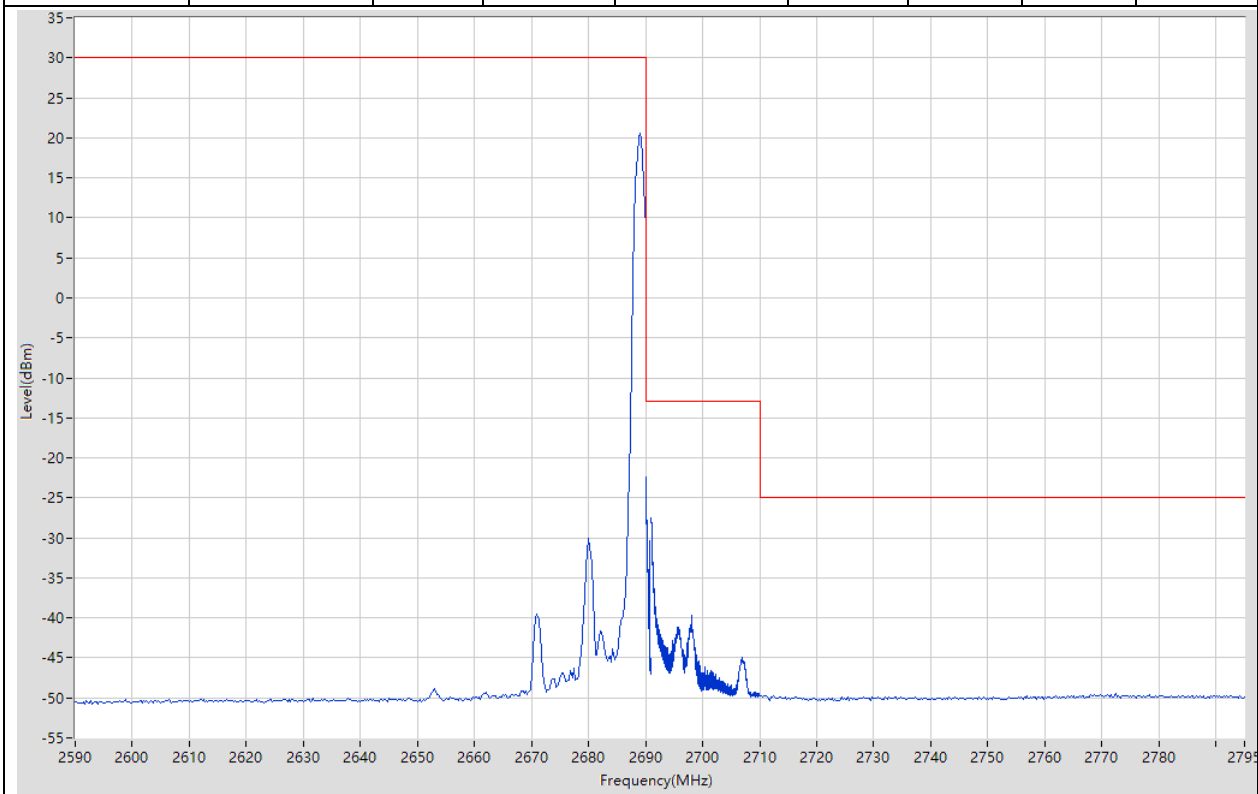


38.16. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:50@0, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2681.25 | 8.85 | 30 | Pass | 401 |
| 2690 | 2691 | 0.4 | RMS | 2690 | -33.32 | -13 | Pass | 4 |
| 2691 | 2695 | 1 | RMS | 2691.01 | -22.37 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2695.6 | -28.79 | -13 | Pass | 401 |
| 2710 | 2715 | 1 | RMS | 2710.925 | -39.52 | -25 | Pass | 401 |
| 2715 | 2795 | 1 | RMS | 2715 | -41.08 | -25 | Pass | 401 |

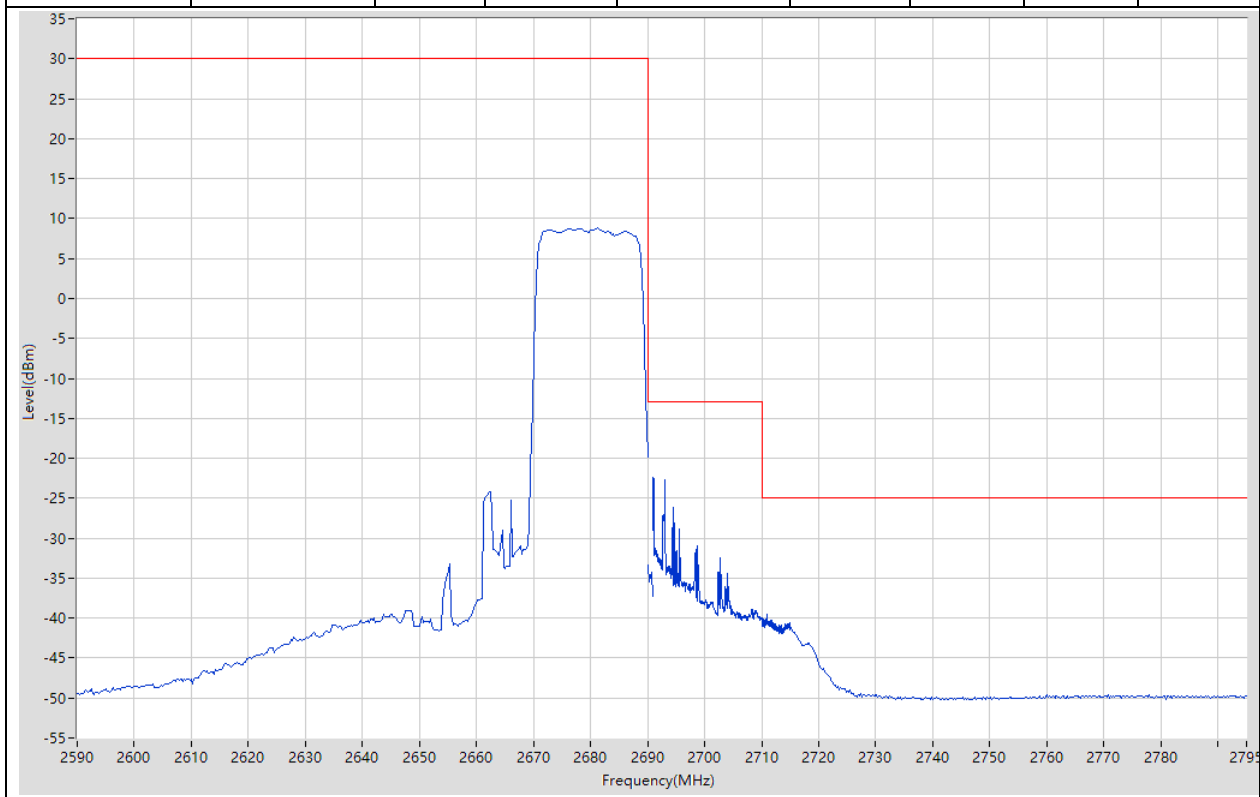


38.17. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -43.03 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.98 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2496 | -27.65 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 20.87 | 30 | Pass | 401 |

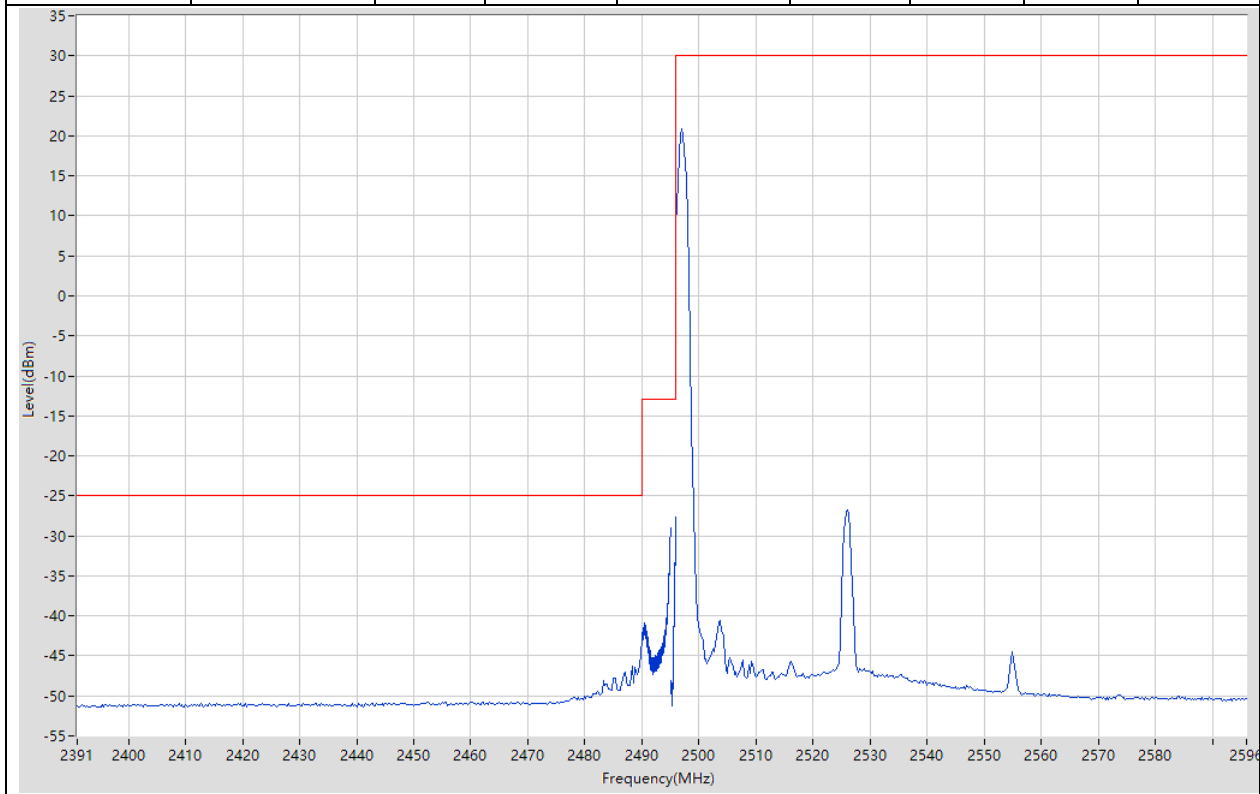


38.18. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:162@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.01 | -35.11 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.938 | -33.82 | -13 | Pass | 401 |
| 2495 | 2496 | 1.2 | RMS | 2496 | -30.12 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2547.25 | 4.75 | 30 | Pass | 401 |

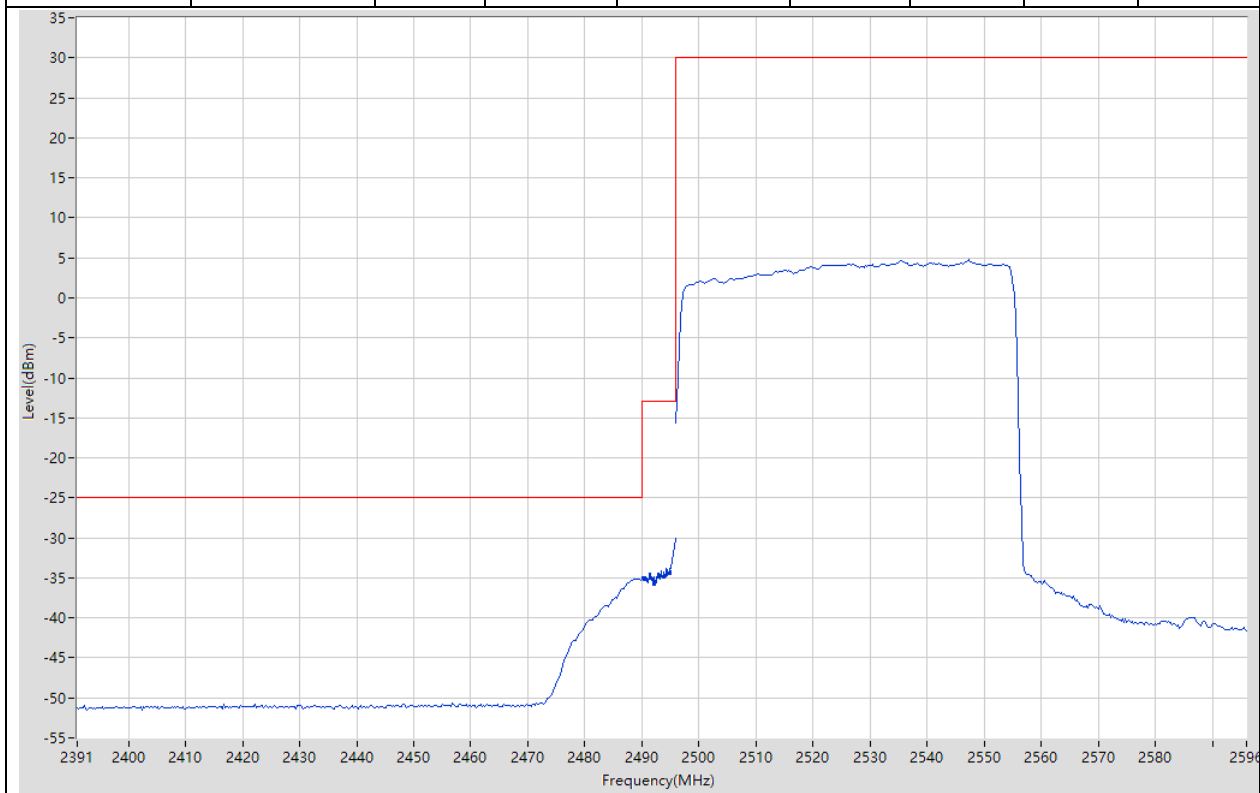

38.19. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@161, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.54 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.01 | -25.34 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -29.86 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2717.825 | -43.09 | -13 | Pass | 401 |
| 2750 | 2795 | 1 | RMS | 2768.338 | -49.59 | -25 | Pass | 401 |

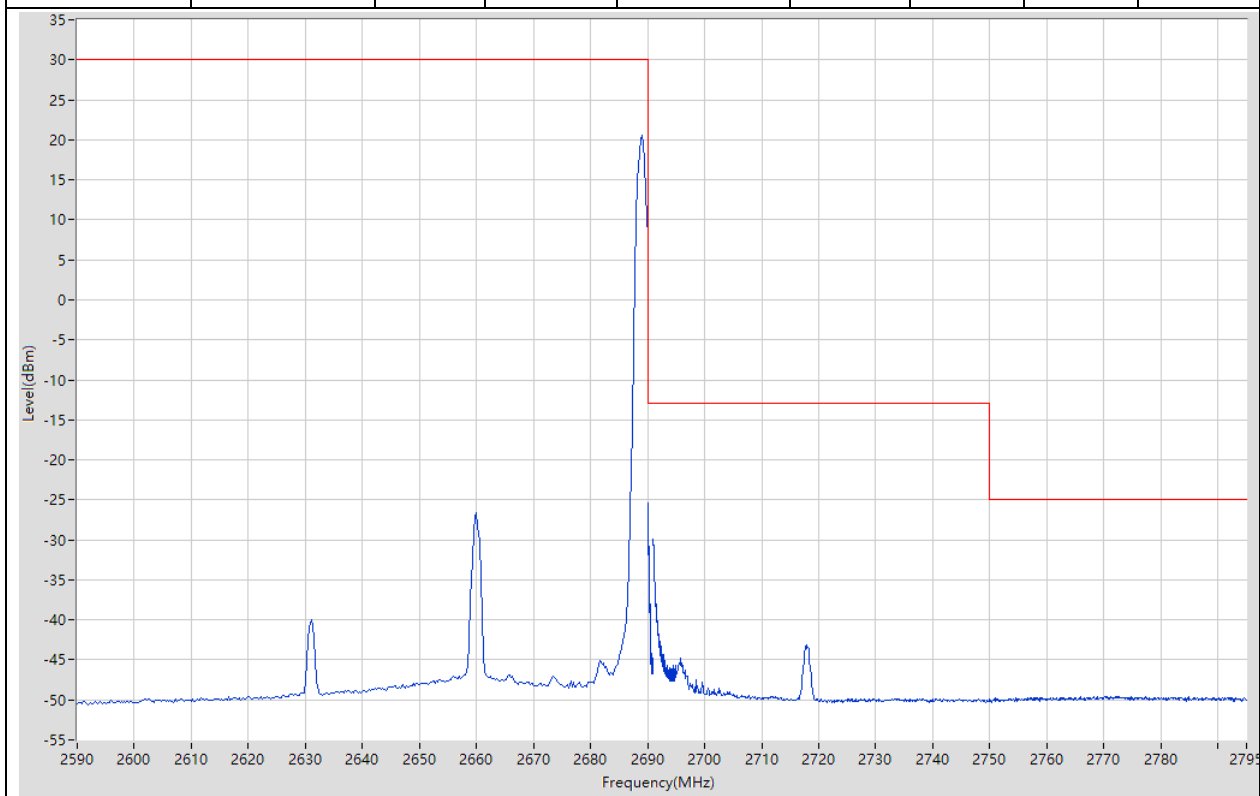


38.20. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:162@0, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2636 | 4.58 | 30 | Pass | 401 |
| 2690 | 2691 | 1.2 | RMS | 2690 | -29.05 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2692.54 | -26.51 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2696.513 | -31.37 | -13 | Pass | 401 |
| 2750 | 2755 | 1 | RMS | 2751.65 | -49.74 | -25 | Pass | 401 |
| 2755 | 2795 | 1 | RMS | 2769.8 | -49.59 | -25 | Pass | 401 |




38.21. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2487.278 | -46.29 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.975 | -29.36 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.985 | -28.44 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 20.78 | 30 | Pass | 401 |

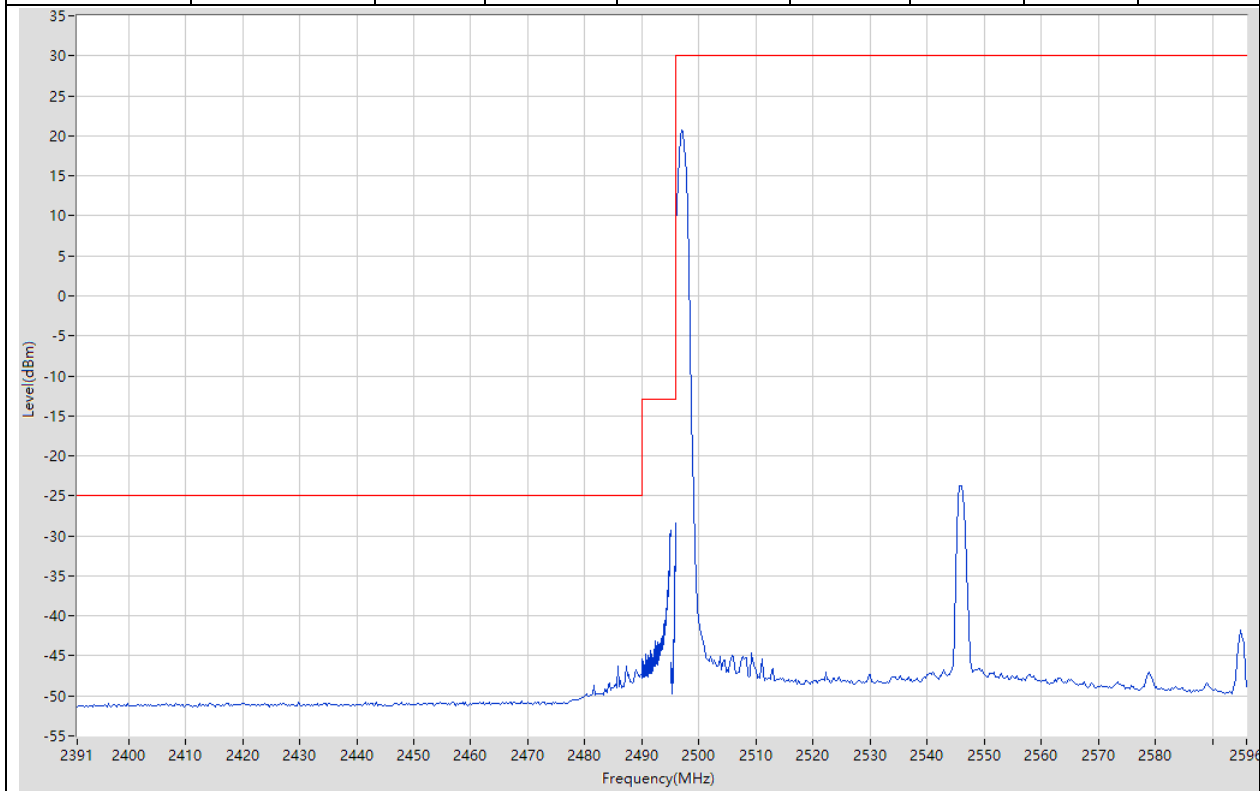


38.22. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:270@0, LTE Ch:26140, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.753 | -37.55 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.9 | -36.99 | -13 | Pass | 401 |
| 2495 | 2496 | 1 | RMS | 2496 | -34.51 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2550.5 | 3.22 | 30 | Pass | 401 |

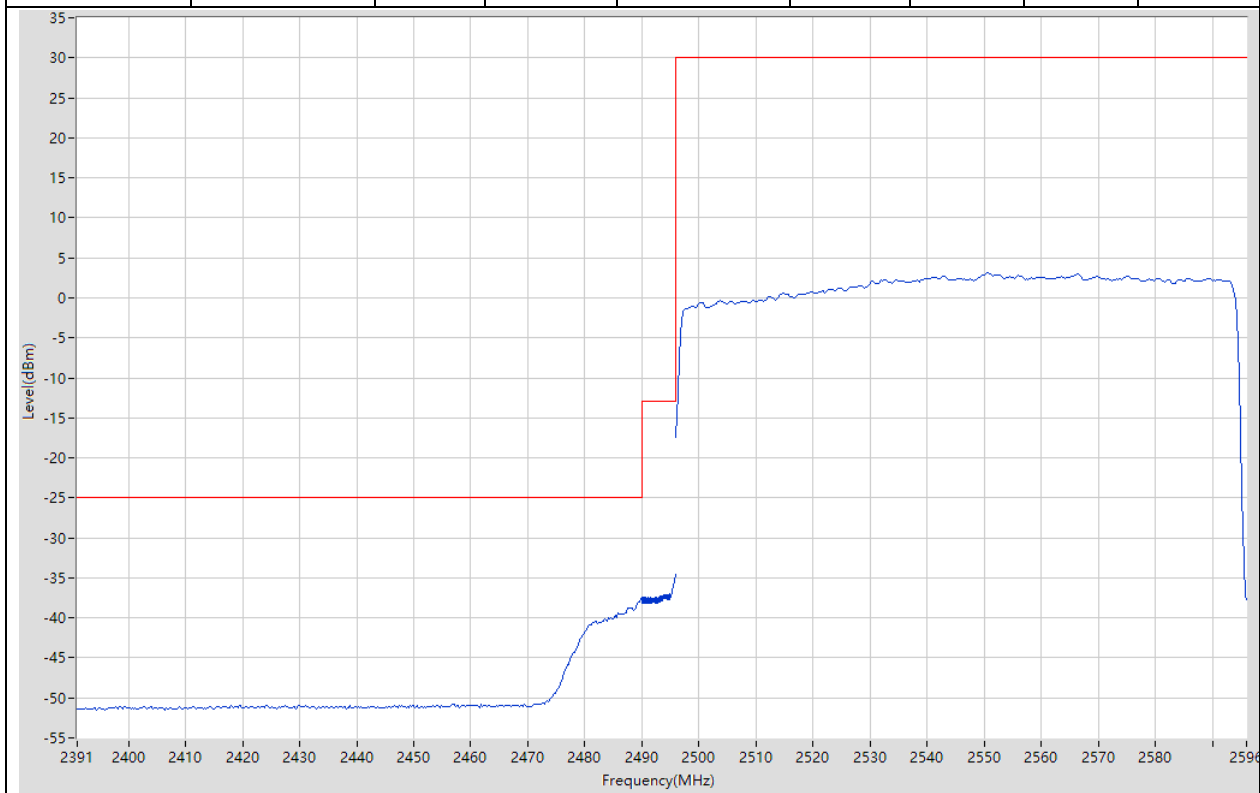

38.23. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@272, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.63 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.01 | -24.58 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691.02 | -29.73 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2698.088 | -45.59 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2792.988 | -49.56 | -25 | Pass | 401 |

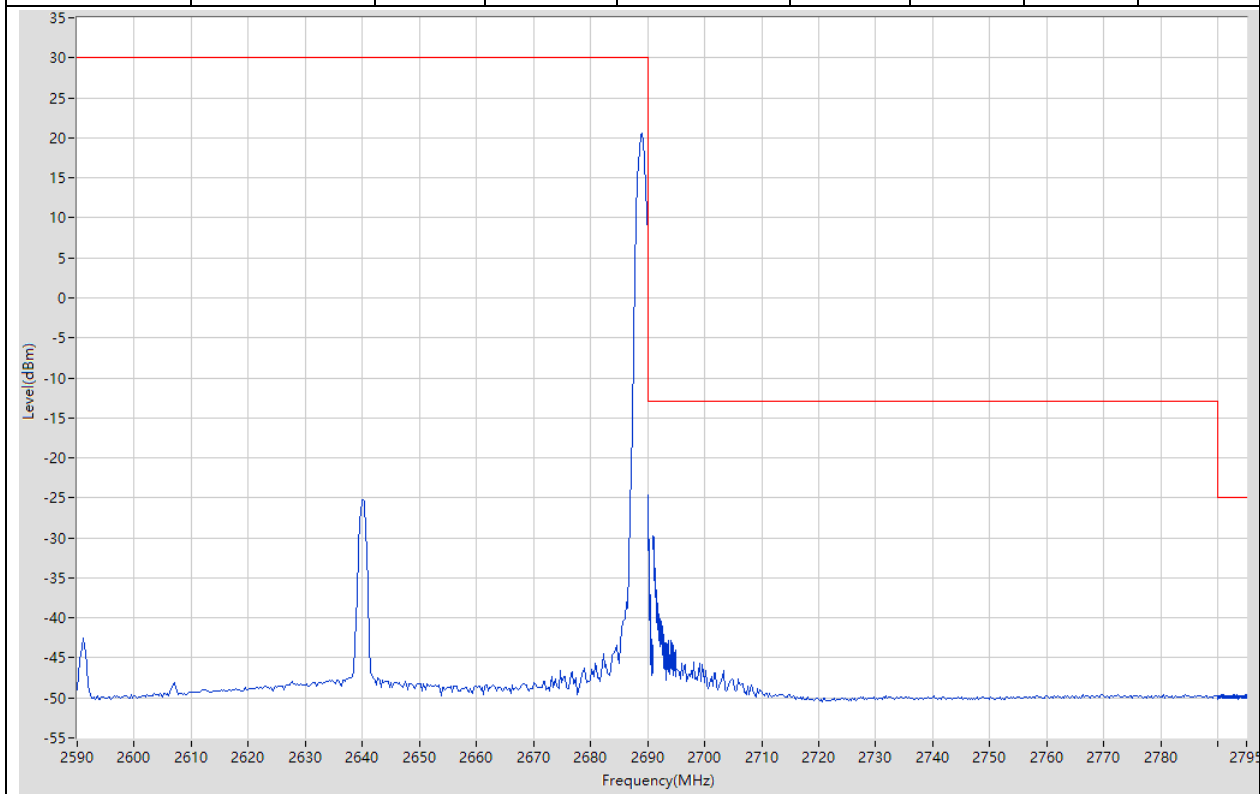

38.24. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:270@0, LTE Ch:26590, LTE BW:20, QPSK, LTE RB:100@0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2644.5 | 3.03 | 30 | Pass | 401 |
| 2690 | 2691 | 2 | RMS | 2690 | -34.47 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2693.37 | -36.17 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2698.563 | -36.35 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2795 | -49.57 | -25 | Pass | 401 |



39. DC_26A_n41A_SCS30


39.1. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.02 | -42.95 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.71 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2496 | -28.28 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 22.07 | 30 | Pass | 401 |

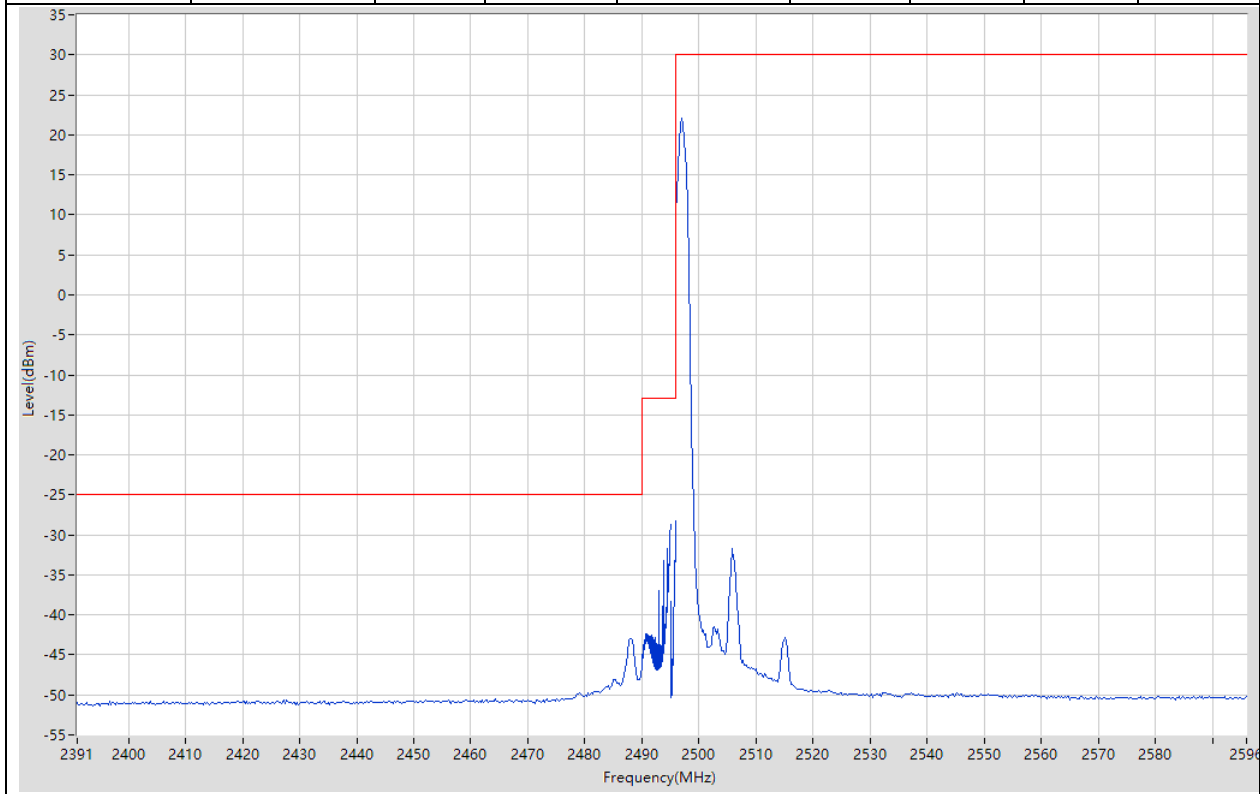


39.2. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:50@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.763 | -42.12 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.675 | -30.99 | -13 | Pass | 401 |
| 2495 | 2496 | 0.4 | RMS | 2496 | -32.32 | -13 | Pass | 4 |
| 2496 | 2596 | 1 | RMS | 2510.5 | 10.64 | 30 | Pass | 401 |

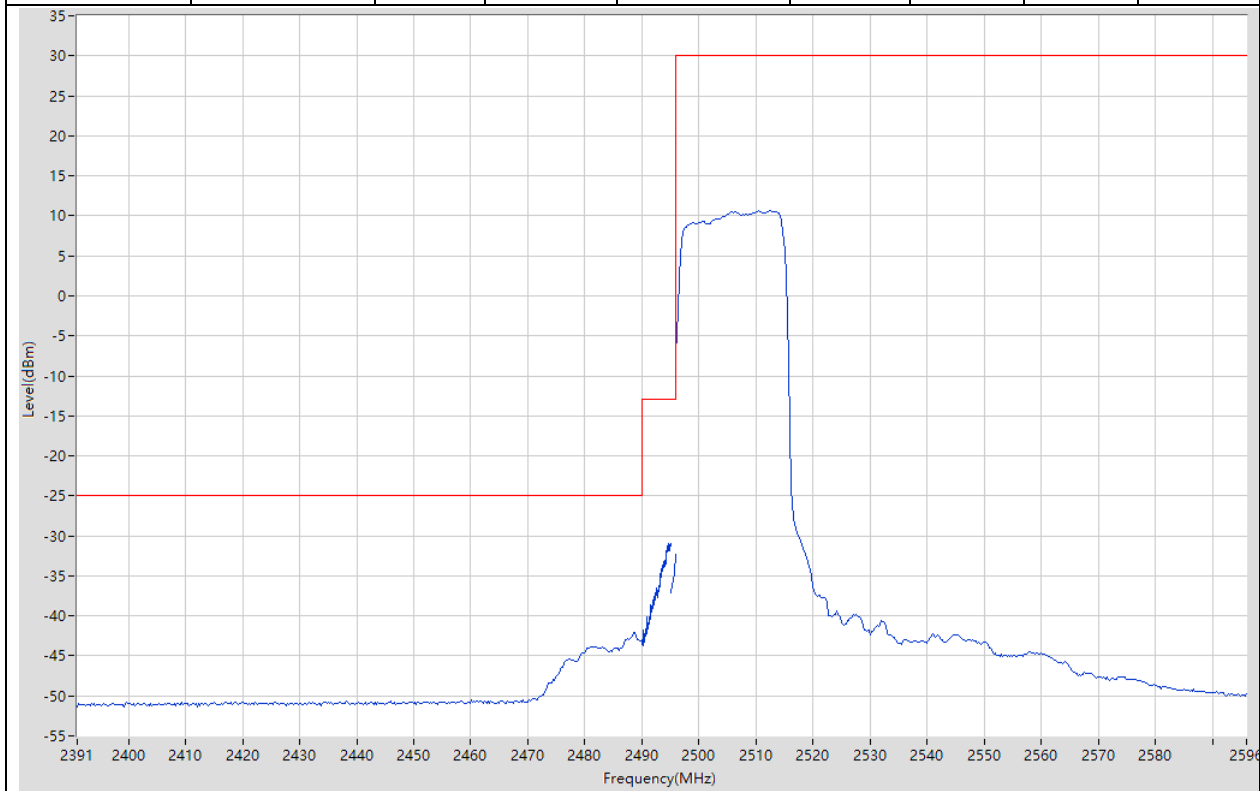


39.3. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:1 @50, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.53 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.01 | -23.49 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691.01 | -27.66 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2695.263 | -39.86 | Pass | 401 | |
| 2710 | 2795 | 1 | RMS | 2790.963 | -49.22 | -25 | Pass | 401 |

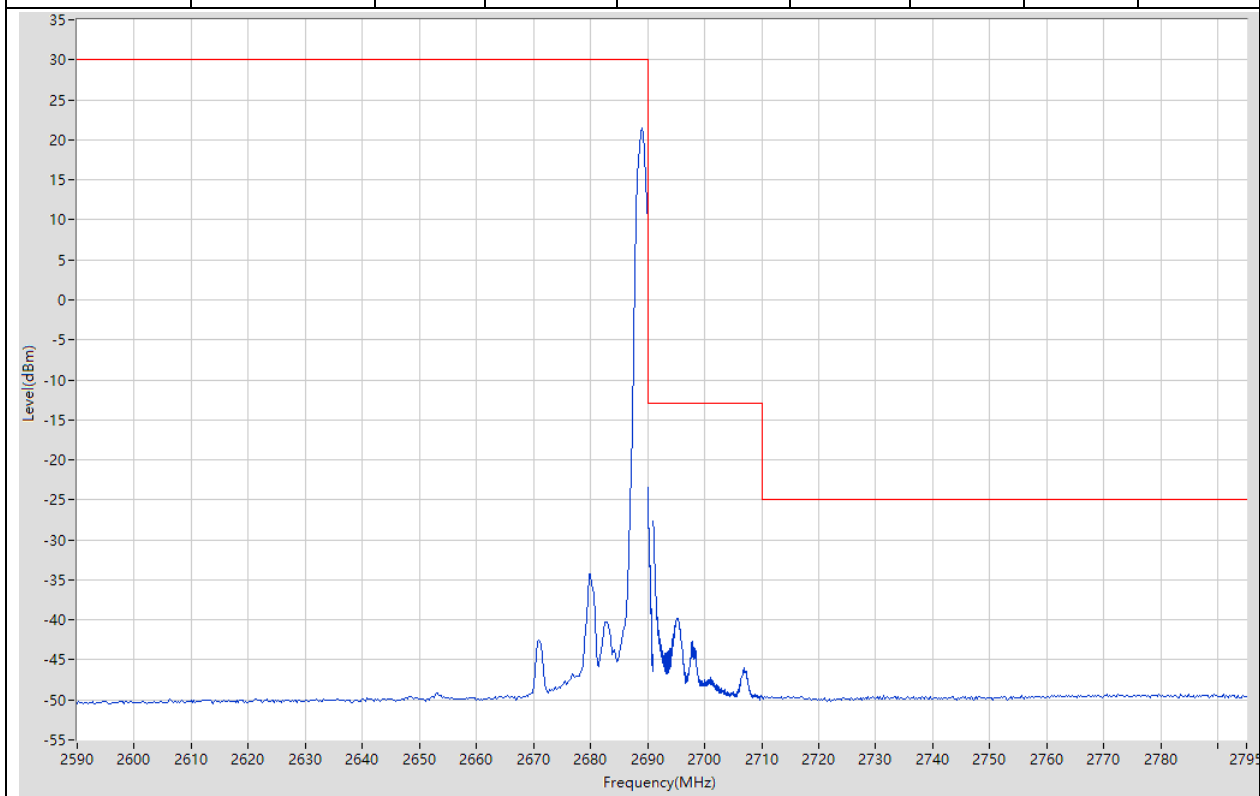


39.4. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, QPSK, NR RB:50@0, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2680.25 | 10.23 | 30 | Pass | 401 |
| 2690 | 2691 | 0.4 | RMS | 2690 | -33.27 | -13 | Pass | 4 |
| 2691 | 2695 | 1 | RMS | 2691.02 | -30.09 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2696.2 | -35.98 | -13 | Pass | 401 |
| 2710 | 2715 | 1 | RMS | 2714.85 | -39.92 | -25 | Pass | 401 |
| 2715 | 2795 | 1 | RMS | 2715.2 | -39.83 | -25 | Pass | 401 |

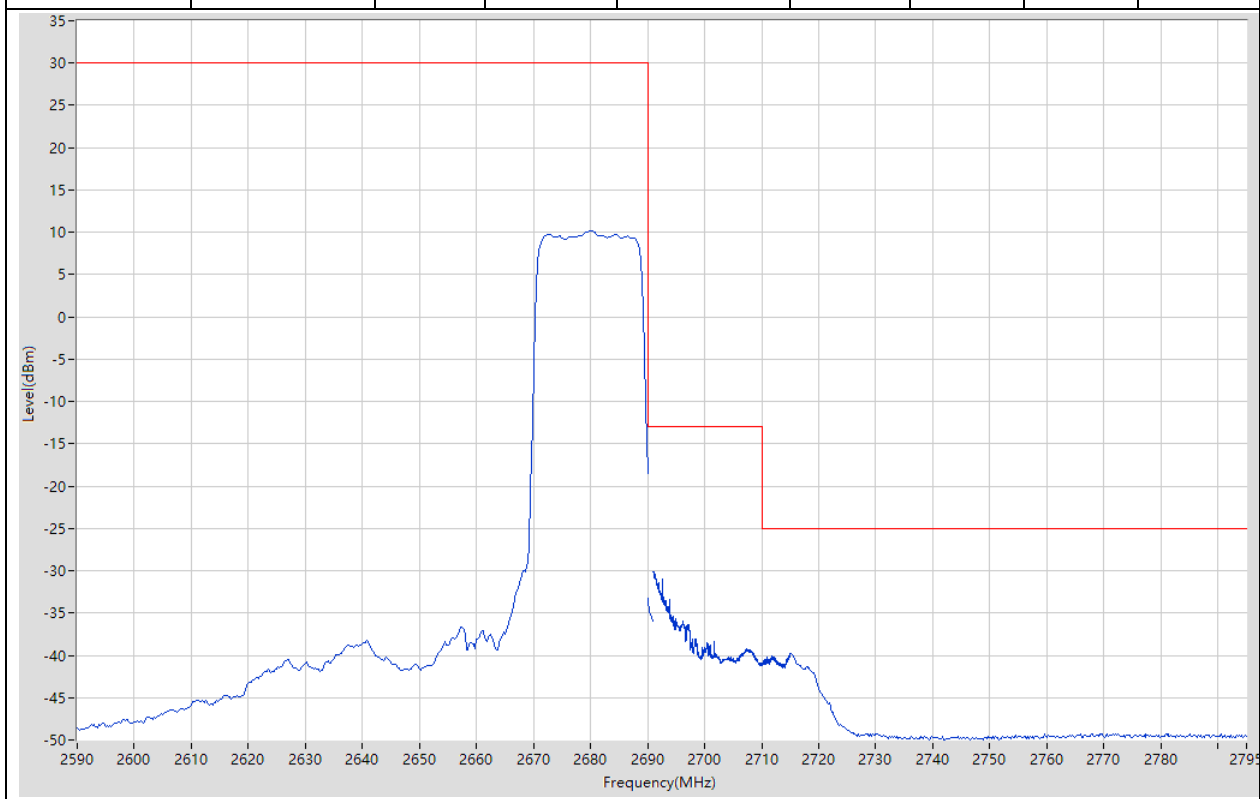


39.5. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -46.19 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -27.22 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.995 | -26.27 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 22.05 | 30 | Pass | 401 |

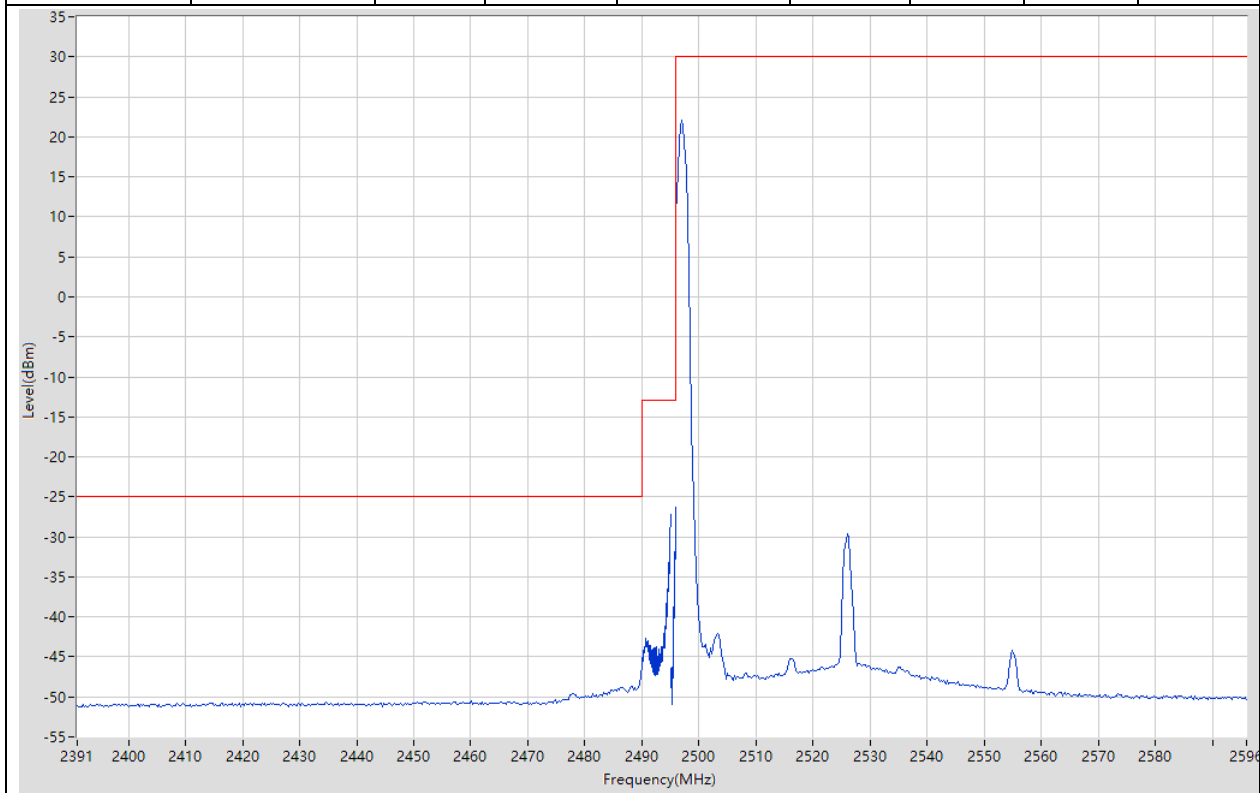


39.6. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:162@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.01 | -33.3 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.925 | -26.34 | -13 | Pass | 401 |
| 2495 | 2496 | 1.2 | RMS | 2496 | -27.72 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2546.25 | 5.6 | 30 | Pass | 401 |

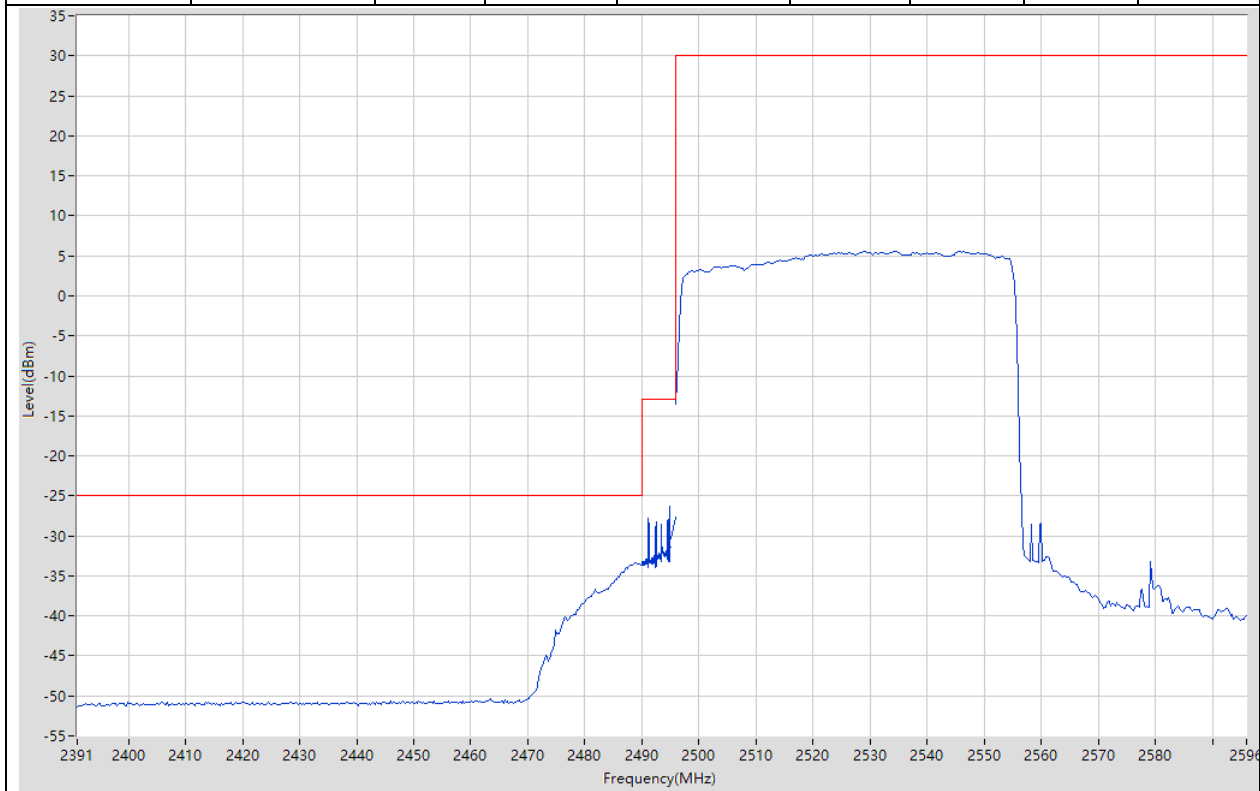

39.7. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@161, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.65 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.005 | -25.48 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691.01 | -30.01 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2717.963 | -43.8 | -13 | Pass | 401 |
| 2750 | 2795 | 1 | RMS | 2770.25 | -49.22 | -25 | Pass | 401 |

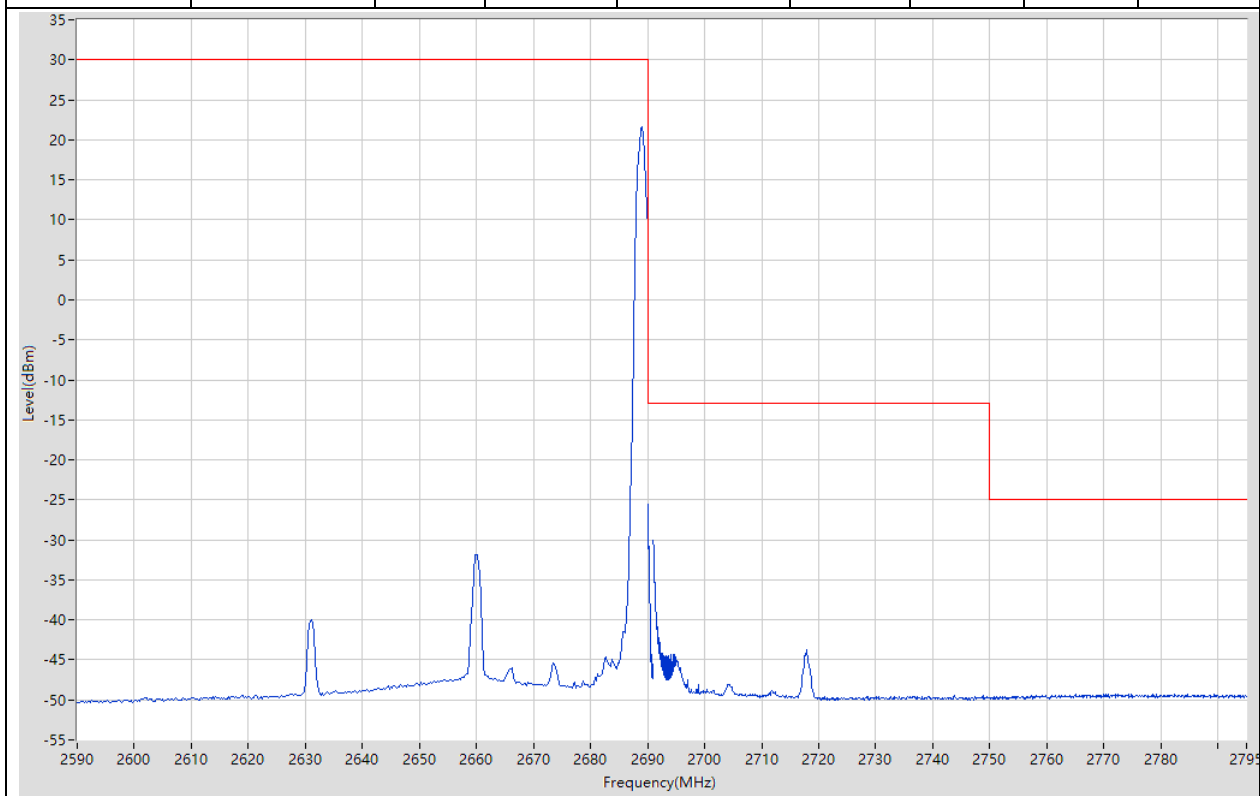


39.8. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, QPSK, NR RB:162@0, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2637.25 | 5.59 | 30 | Pass | 401 |
| 2690 | 2691 | 1.2 | RMS | 2690 | -27.91 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2691.12 | -33.3 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2695.963 | -35.18 | -13 | Pass | 401 |
| 2750 | 2755 | 1 | RMS | 2754.838 | -49.34 | -25 | Pass | 401 |
| 2755 | 2795 | 1 | RMS | 2777.4 | -49.24 | -25 | Pass | 401 |




39.9. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.753 | -48.52 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.8 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.985 | -27.34 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 22.07 | 30 | Pass | 401 |

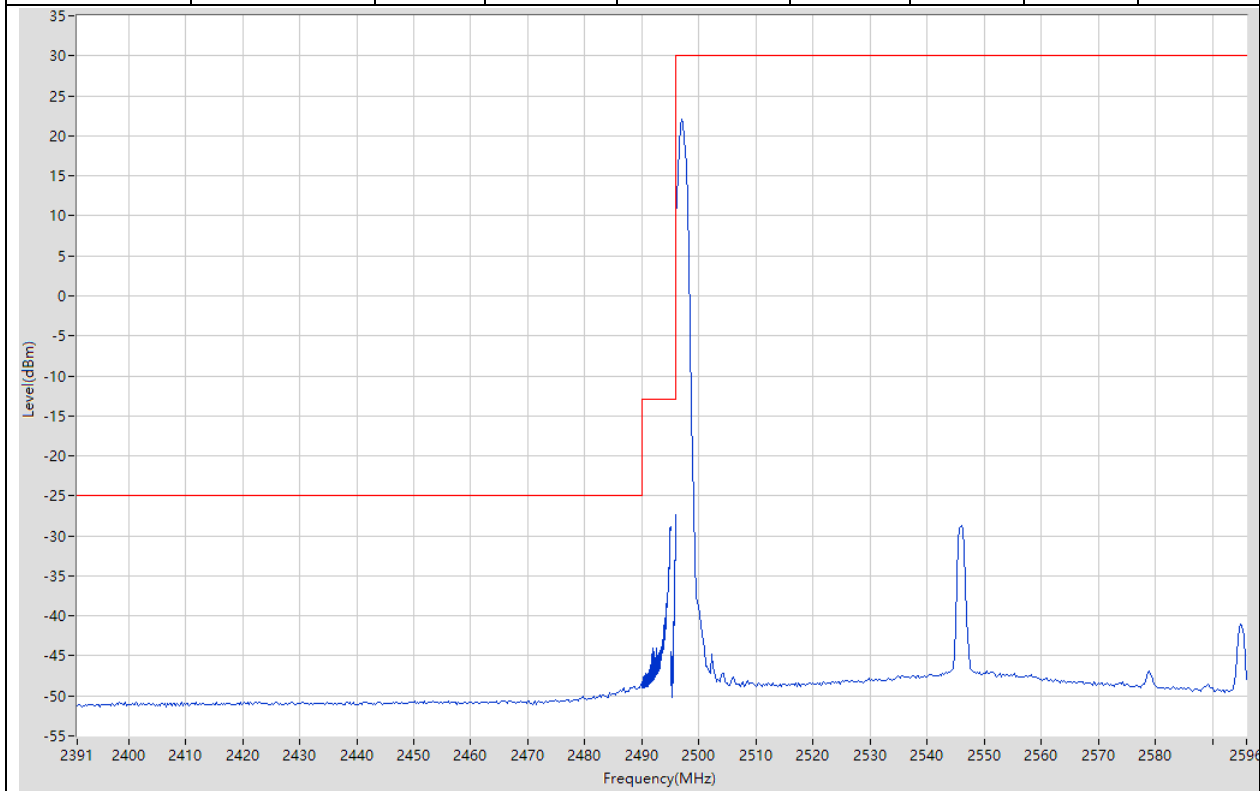


39.10. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:270@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.753 | -35.69 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.338 | -35.38 | -13 | Pass | 401 |
| 2495 | 2496 | 1 | RMS | 2496 | -32.85 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2546.25 | 4.22 | 30 | Pass | 401 |

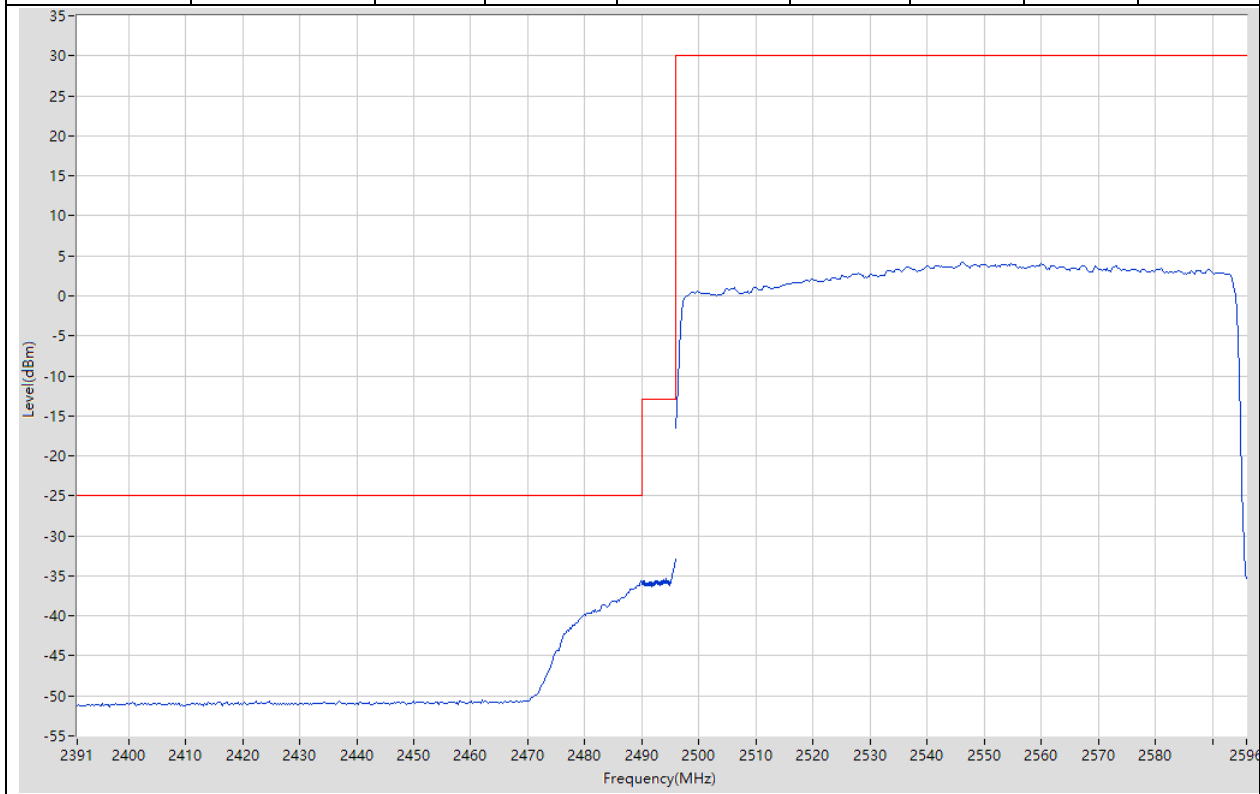

39.11. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:1@272, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 22.18 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.003 | -24.5 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -29.1 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2695.95 | -46.19 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2794.713 | -49.24 | -25 | Pass | 401 |

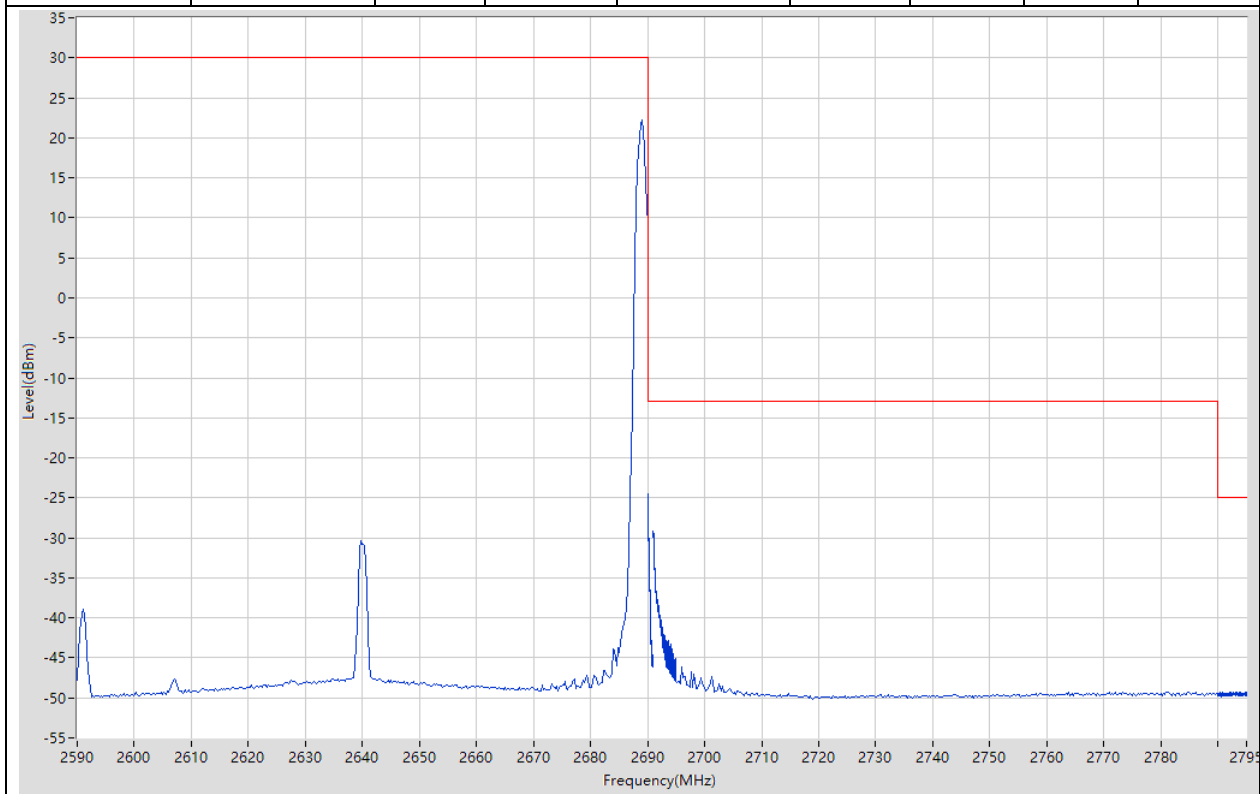


39.12. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, QPSK, NR RB:270@0, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2636.25 | 4.14 | 30 | Pass | 401 |
| 2690 | 2691 | 2 | RMS | 2691 | -31.93 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2694.95 | -34.22 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2695.95 | -33.8 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2793.775 | -49.26 | -25 | Pass | 401 |




39.13. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.02 | -43.08 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -28.74 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2495.985 | -27.97 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 21.24 | 30 | Pass | 401 |

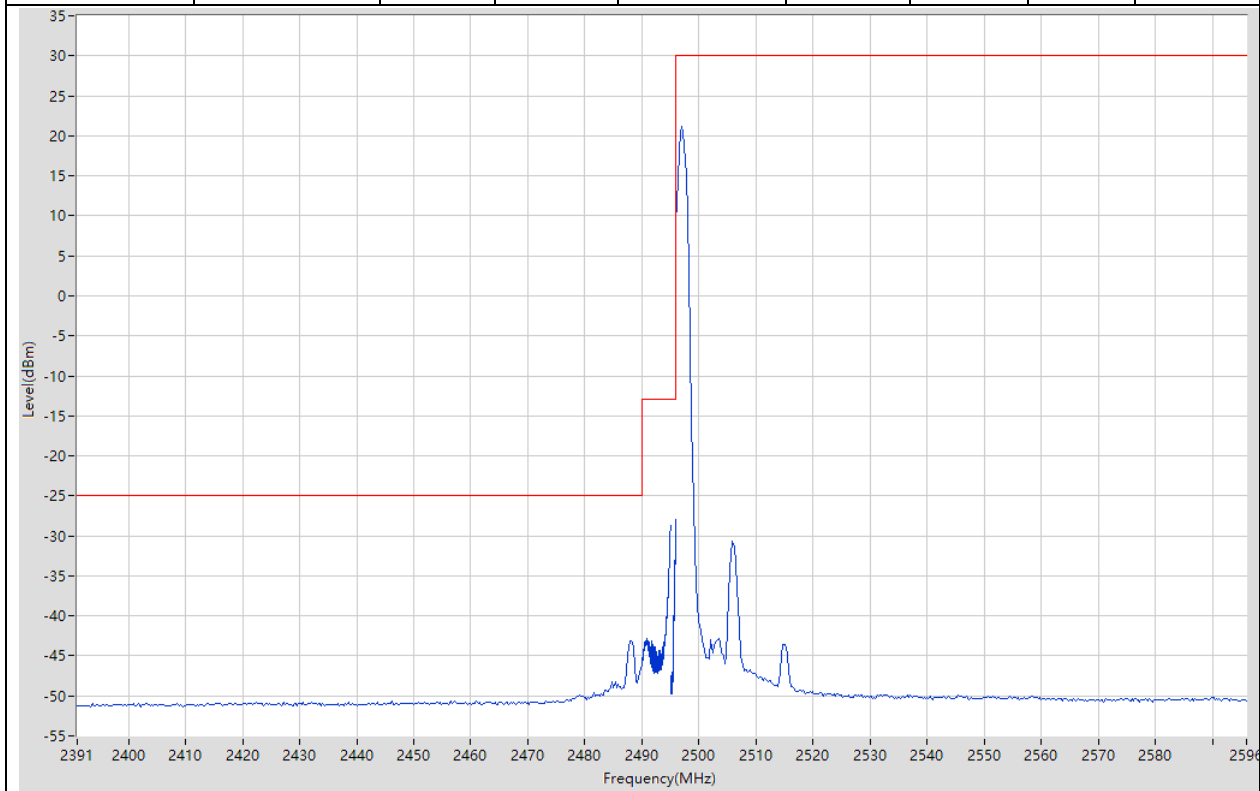


39.14. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501204, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:50@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2488.763 | -38.05 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.888 | -32.05 | -13 | Pass | 401 |
| 2495 | 2496 | 0.4 | RMS | 2496 | -33.85 | -13 | Pass | 4 |
| 2496 | 2596 | 1 | RMS | 2507.75 | 9.52 | 30 | Pass | 401 |

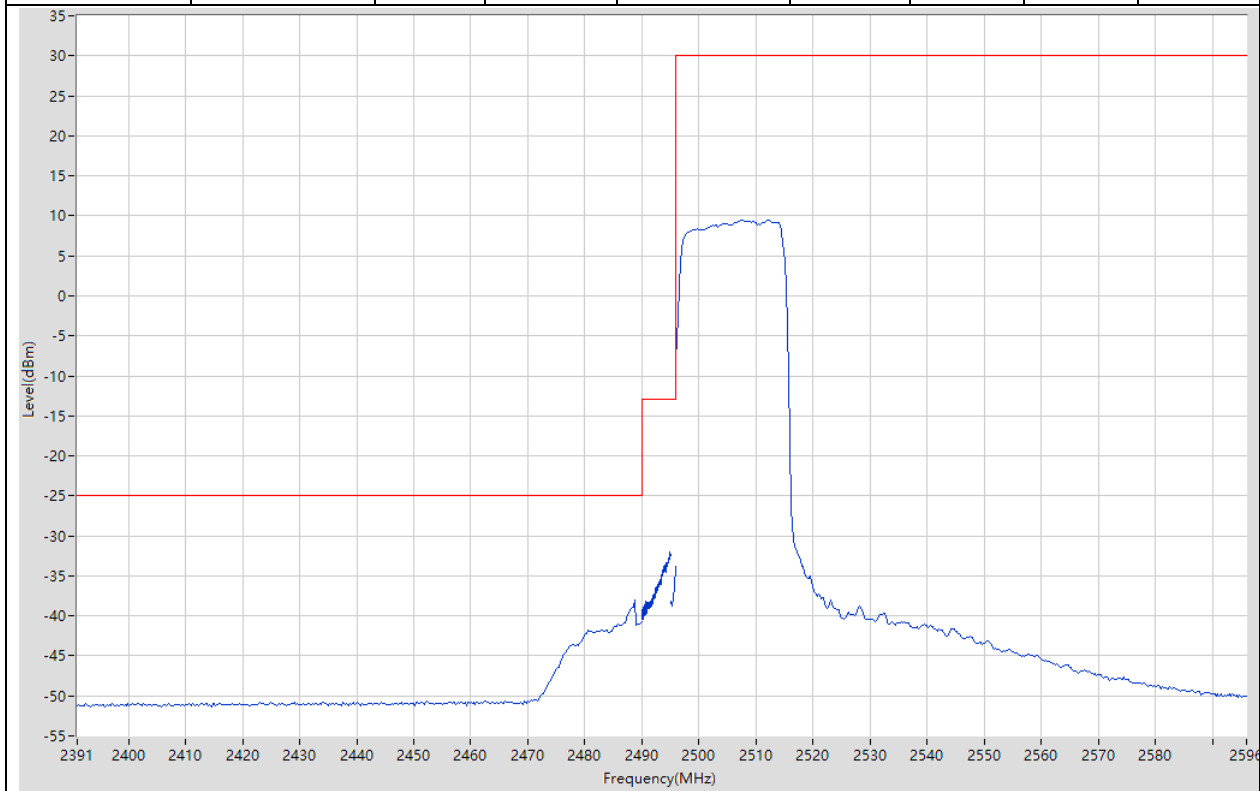


39.15. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@50, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detect or | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|-----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.83 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.01 | -23.22 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691.01 | -27.91 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2695.3 | -42.33 | -13 | Pass | 401 |
| 2710 | 2795 | 1 | RMS | 2767.588 | -49.54 | -25 | Pass | 401 |

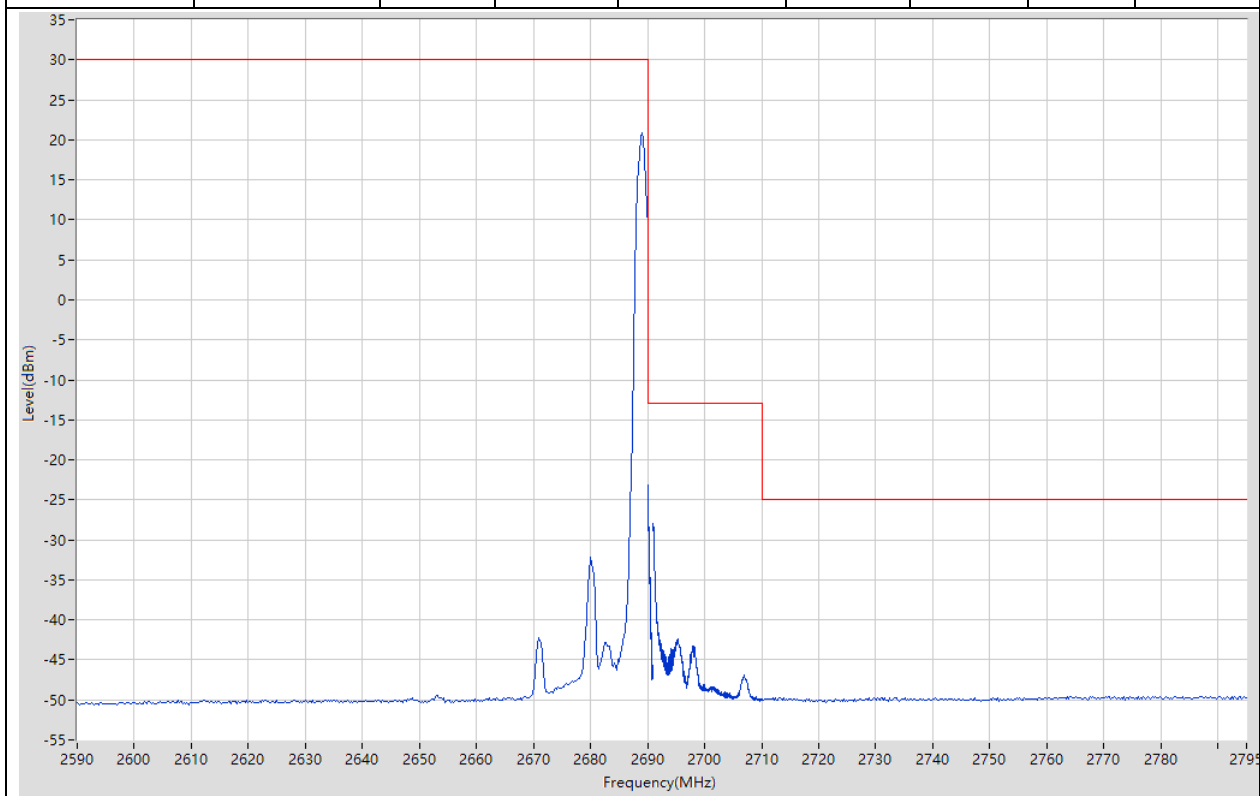


39.16. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:535998, NR BW:20, SCS:30, DFT-s-OFDM, 16QAM, NR RB:50@0, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2681.25 | 9.06 | 30 | Pass | 401 |
| 2690 | 2691 | 0.4 | RMS | 2690 | -36.22 | -13 | Pass | 4 |
| 2691 | 2695 | 1 | RMS | 2694.66 | -27.51 | -13 | Pass | 401 |
| 2695 | 2710 | 1 | RMS | 2697.513 | -36.47 | -13 | Pass | 401 |
| 2710 | 2715 | 1 | RMS | 2711 | -40.21 | -25 | Pass | 401 |
| 2715 | 2795 | 1 | RMS | 2715 | -40.77 | -25 | Pass | 401 |

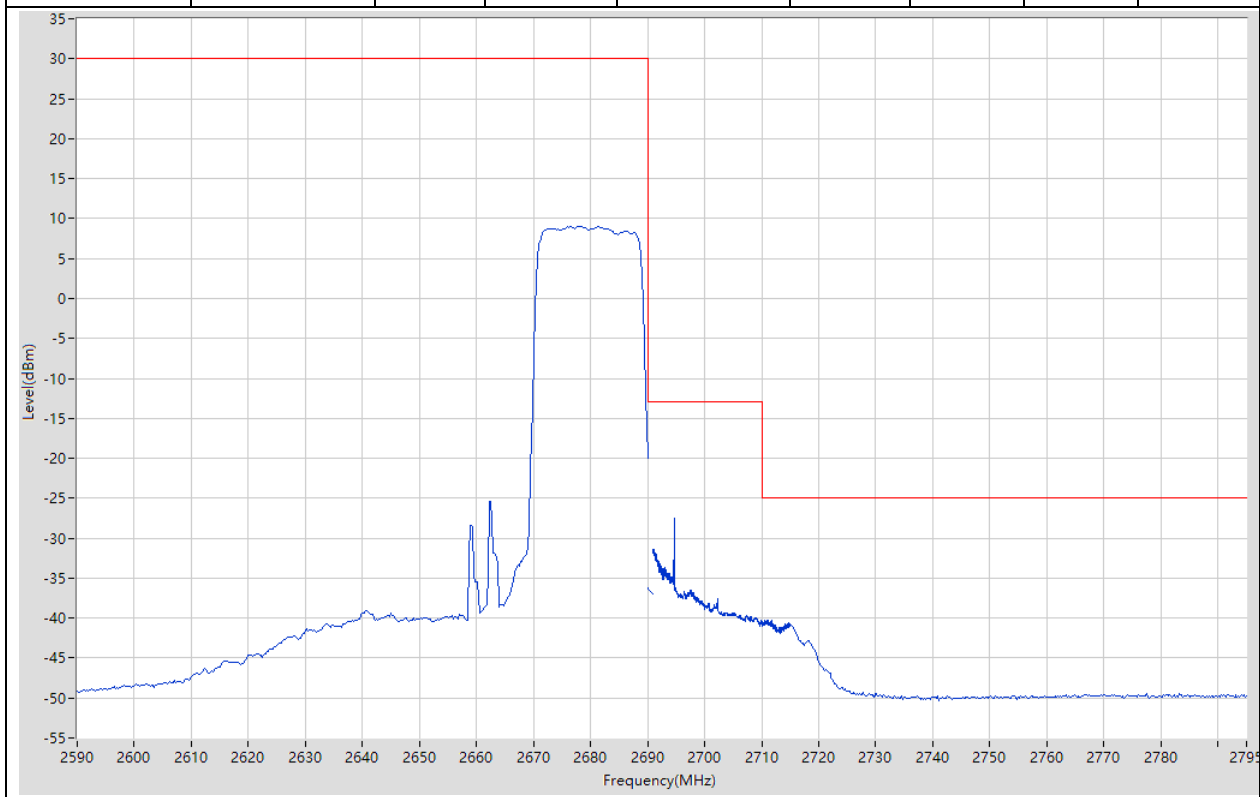


39.17. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2490 | -45.67 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -29.02 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2496 | -27.99 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 21.09 | 30 | Pass | 401 |

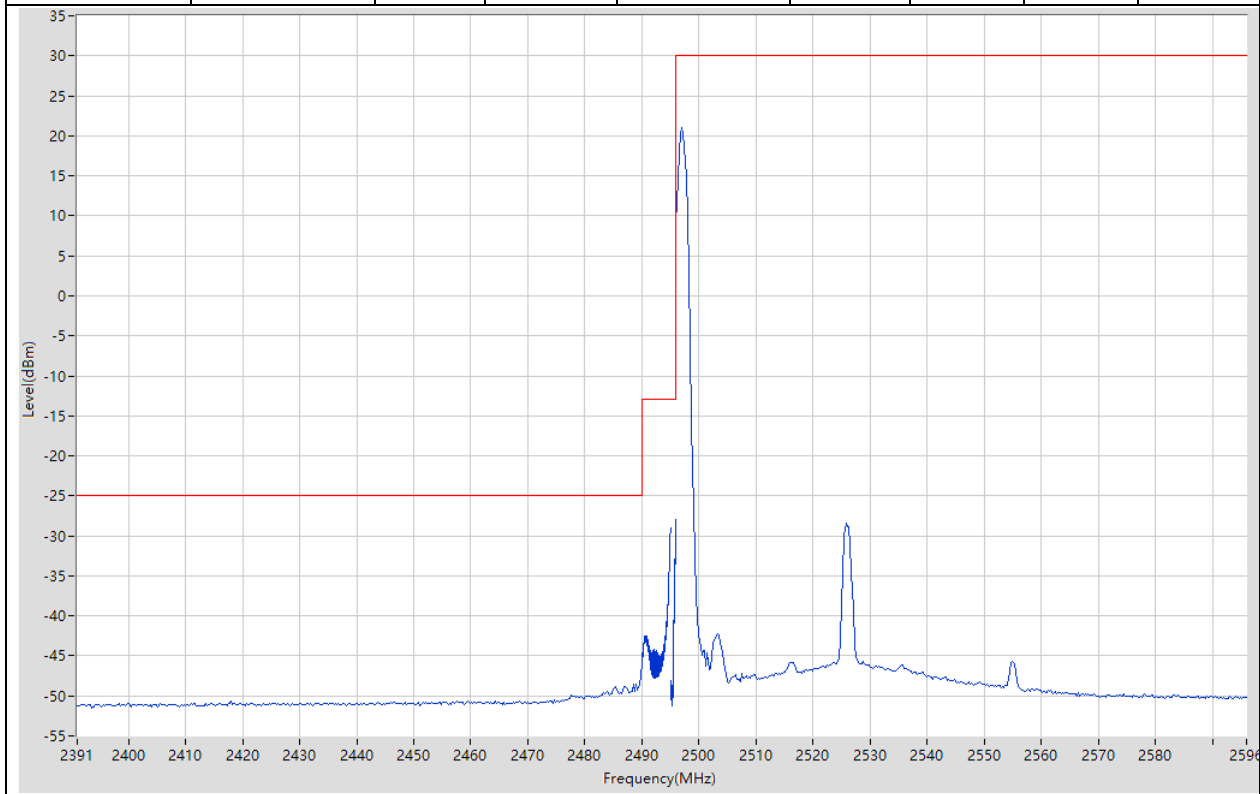


39.18. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:505200, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:162@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.01 | -35.05 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2490.763 | -34.52 | -13 | Pass | 401 |
| 2495 | 2496 | 1.2 | RMS | 2496 | -29.82 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2547.25 | 4.76 | 30 | Pass | 401 |

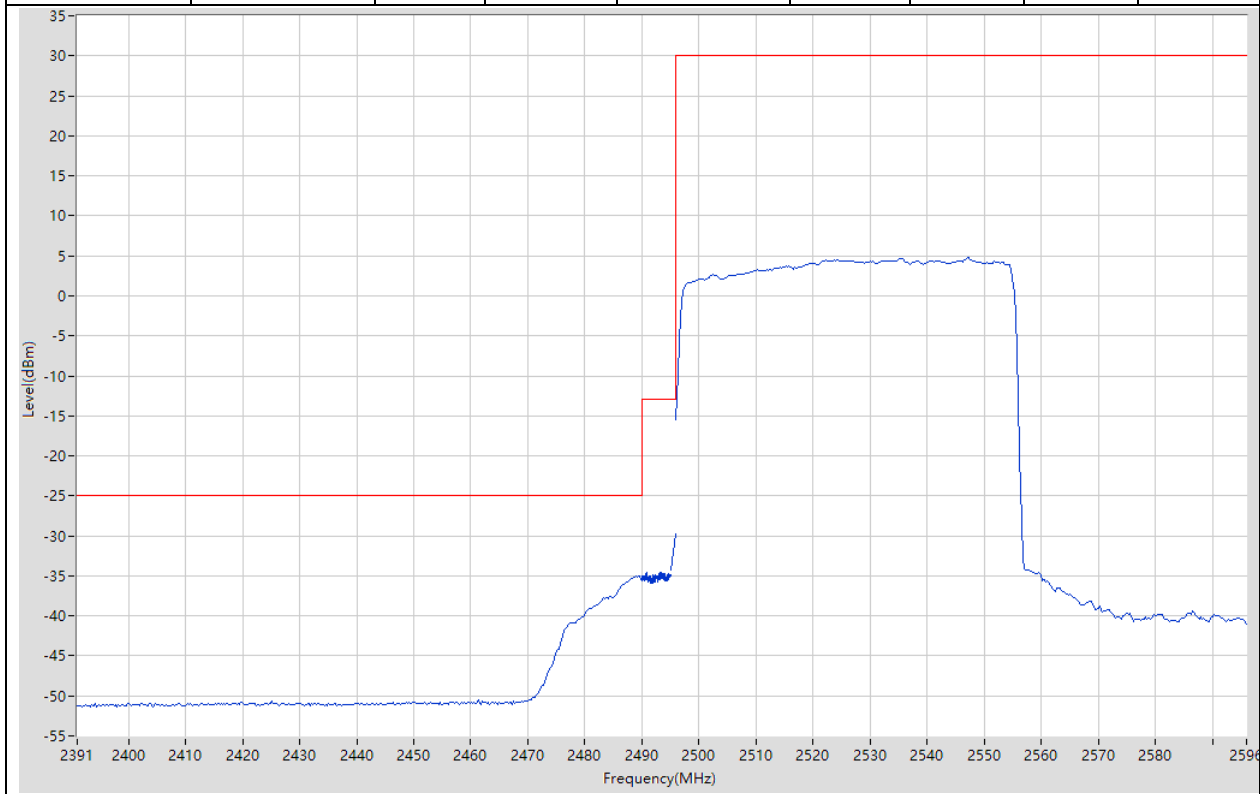

39.19. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@161, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 20.79 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.01 | -24.95 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -29.97 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2717.825 | -44.85 | -13 | Pass | 401 |
| 2750 | 2795 | 1 | RMS | 2779.7 | -49.4 | -25 | Pass | 401 |

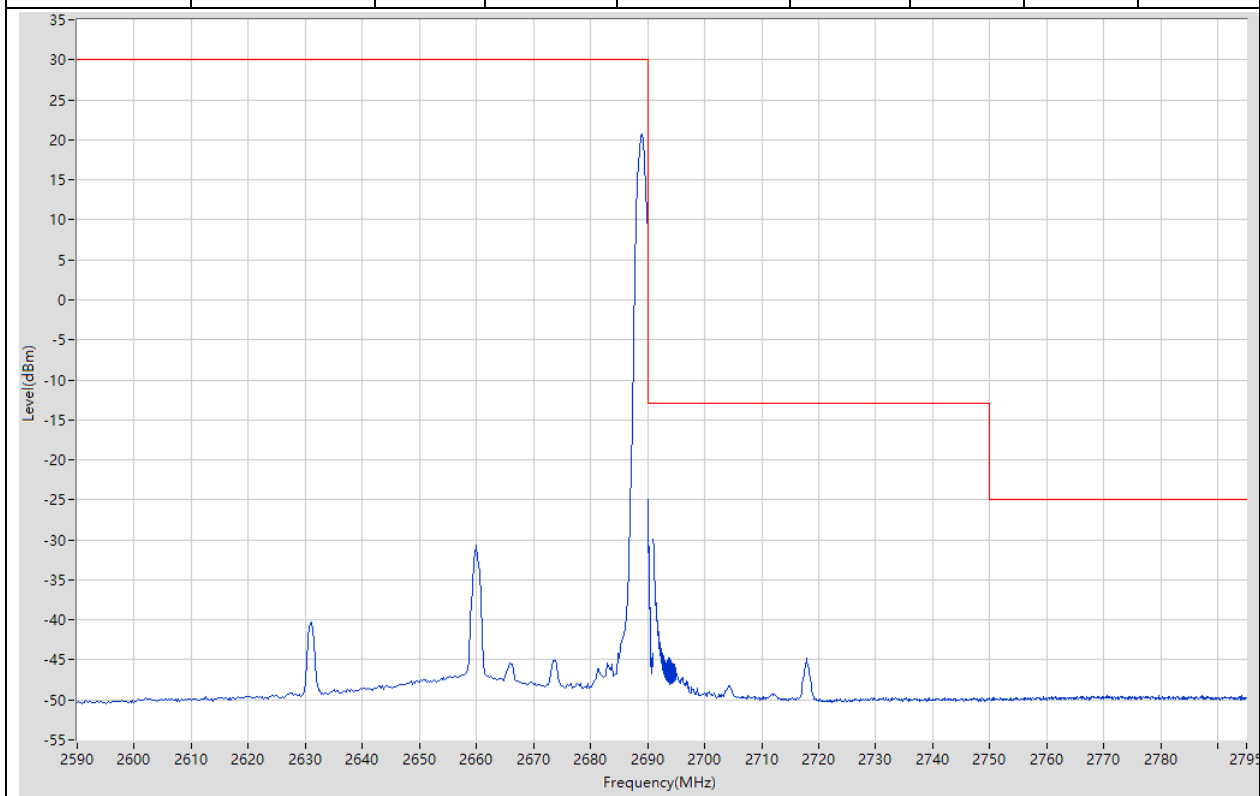


39.20. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:531996, NR BW:60, SCS:30, DFT-s-OFDM, 16QAM, NR RB:162@0, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2636.25 | 4.65 | 30 | Pass | 401 |
| 2690 | 2691 | 1.2 | RMS | 2690 | -29.28 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2691.07 | -34.5 | -13 | Pass | 401 |
| 2695 | 2750 | 1 | RMS | 2698.988 | -35.81 | -13 | Pass | 401 |
| 2750 | 2755 | 1 | RMS | 2754.763 | -49.64 | -25 | Pass | 401 |
| 2755 | 2795 | 1 | RMS | 2776.1 | -49.52 | -25 | Pass | 401 |




39.21. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2486.783 | -48.12 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2495 | -29.71 | -13 | Pass | 401 |
| 2495 | 2496 | 0.051 | RMS | 2496 | -28.61 | -13 | Pass | 401 |
| 2496 | 2596 | 1 | RMS | 2497 | 21.28 | 30 | Pass | 401 |

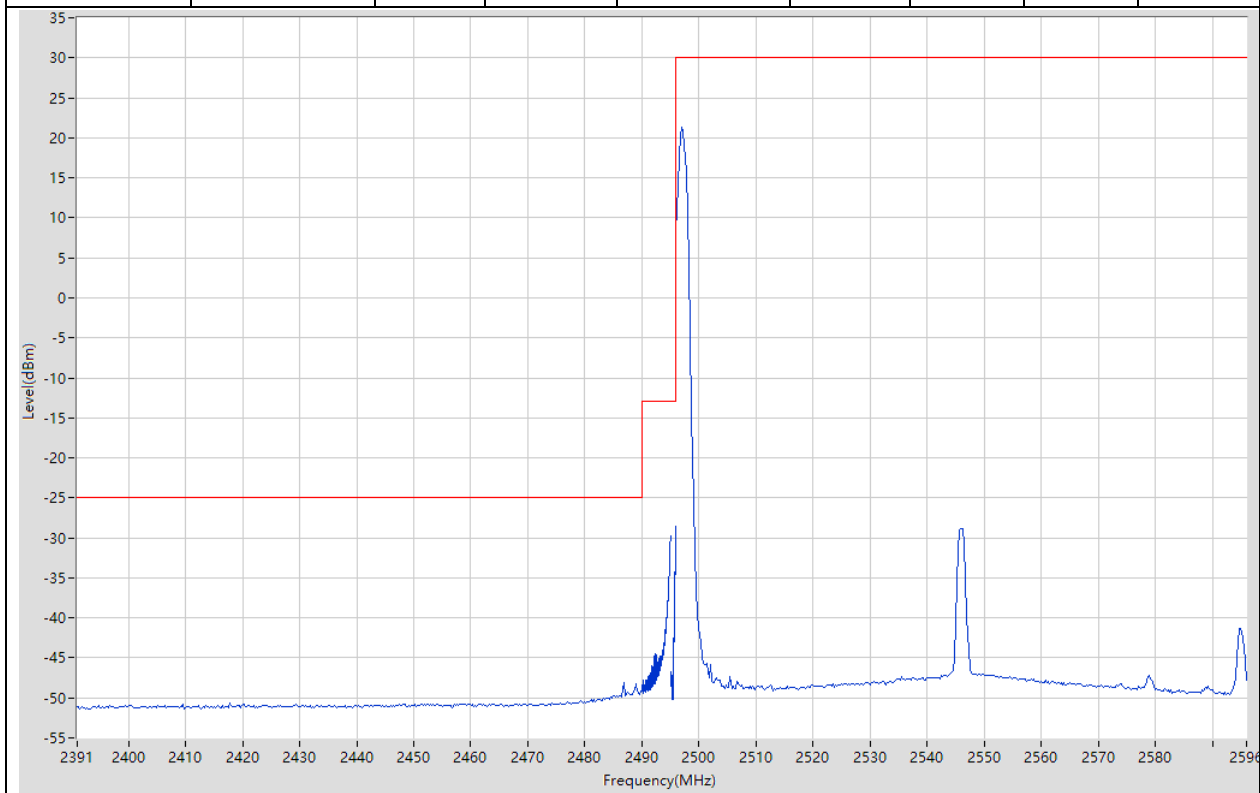


39.22. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:509202, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:270@0, LTE Ch:26765, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2391 | 2490 | 1 | RMS | 2489.753 | -37.41 | -25 | Pass | 401 |
| 2490 | 2495 | 1 | RMS | 2494.988 | -36.78 | -13 | Pass | 401 |
| 2495 | 2496 | 1 | RMS | 2496 | -34.19 | -13 | Pass | 2 |
| 2496 | 2596 | 1 | RMS | 2552.5 | 3.14 | 30 | Pass | 401 |

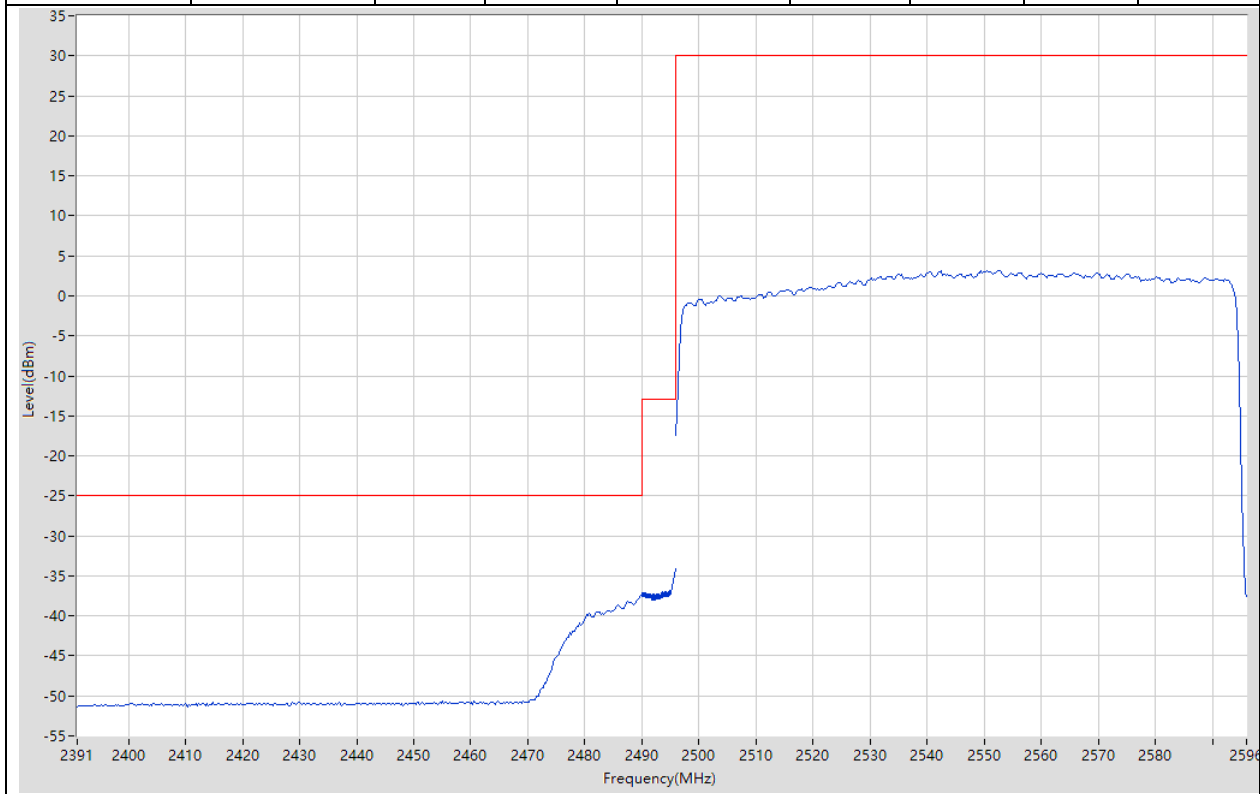

39.23. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:1@272, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2689 | 21.11 | 30 | Pass | 401 |
| 2690 | 2691 | 0.1 | RMS | 2690.01 | -25.02 | -13 | Pass | 401 |
| 2691 | 2695 | 1 | RMS | 2691 | -29.95 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2695 | -46.97 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2792.35 | -49.53 | -25 | Pass | 401 |

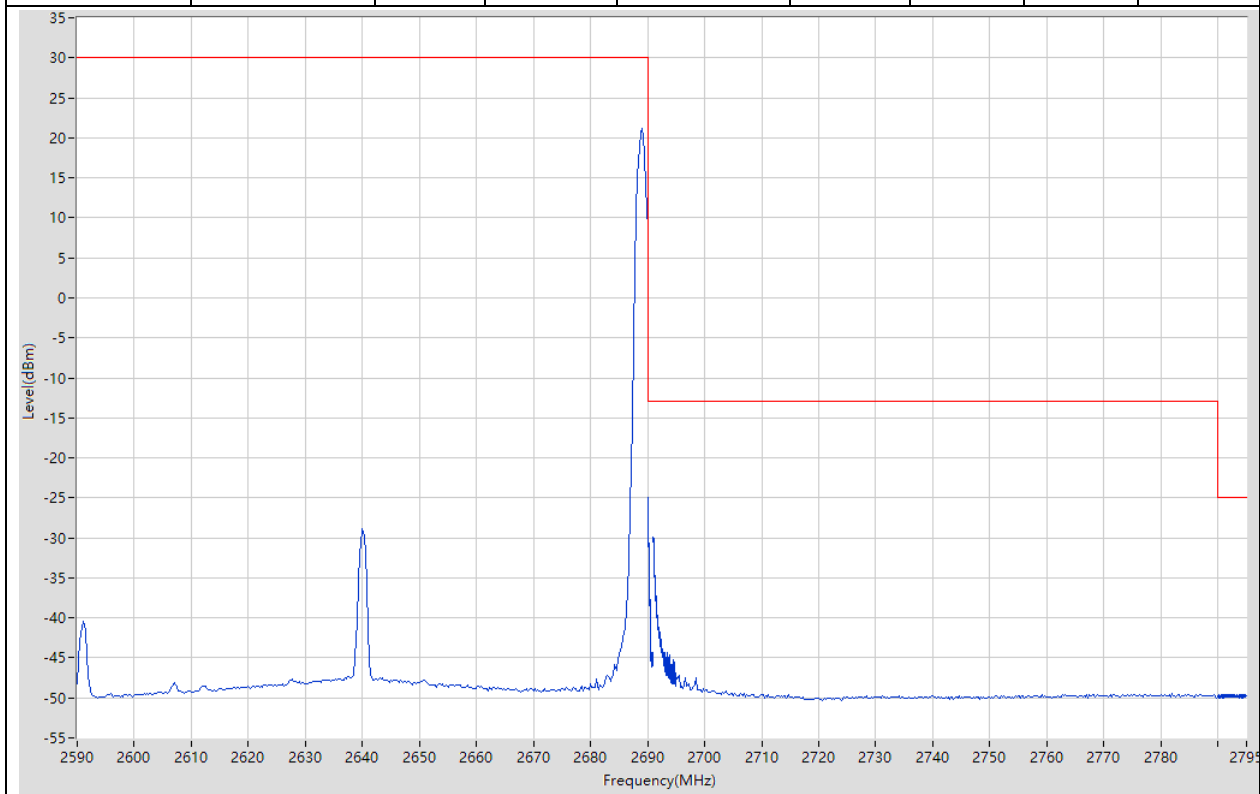

39.24. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:528000, NR BW:100, SCS:30, DFT-s-OFDM, 16QAM, NR RB:270@0, LTE Ch:26965, LTE BW:15, QPSK, LTE RB:75@0)


| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2590 | 2690 | 1 | RMS | 2636.5 | 3.29 | 30 | Pass | 401 |
| 2690 | 2691 | 2 | RMS | 2691 | -33.92 | -13 | Pass | 2 |
| 2691 | 2695 | 1 | RMS | 2693.55 | -36.03 | -13 | Pass | 401 |
| 2695 | 2790 | 1 | RMS | 2701.413 | -36.16 | -13 | Pass | 401 |
| 2790 | 2795 | 1 | RMS | 2792.75 | -49.41 | -25 | Pass | 401 |



40. DC_66A_n7A_SCS15


40.1. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2493.905 | -43.07 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2494.02 | -43.18 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -33.68 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -16.78 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.25 | 21.16 | 30 | Pass | 401 |

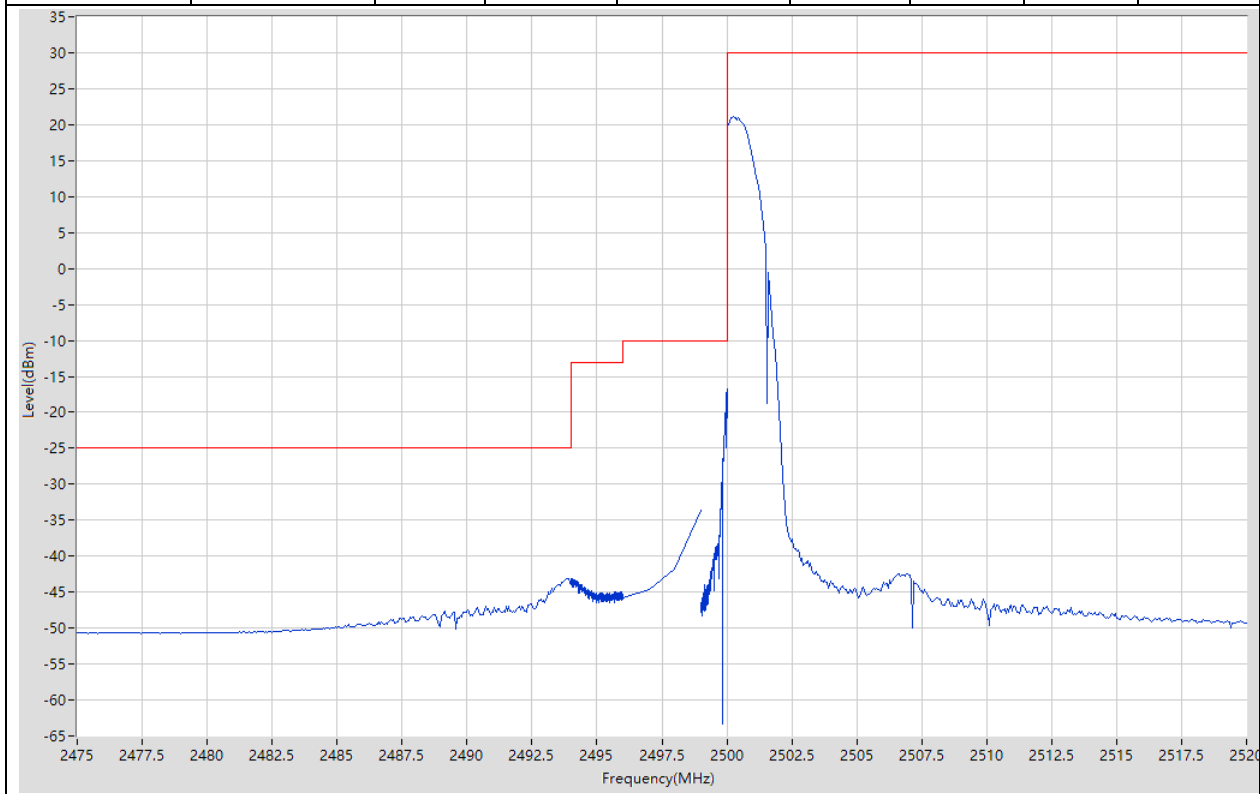


40.2. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2493.478 | -37.58 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2494.225 | -37.66 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -31.62 | -10 | Pass | 4 |
| 2499 | 2500 | 0.1 | RMS | 2500 | -26.65 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2503.75 | 14.99 | 30 | Pass | 401 |

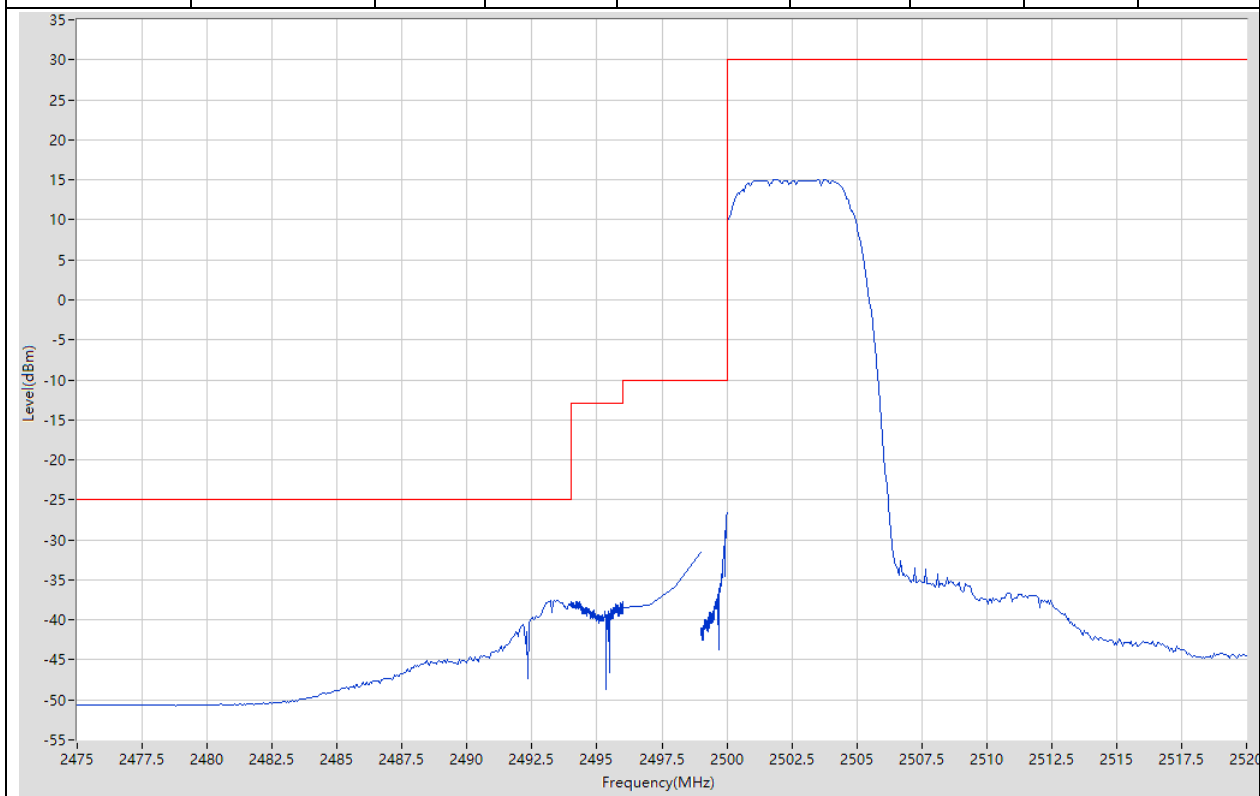


40.3. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@24, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.7 | 21.1 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570.003 | -19 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -35.59 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.933 | -43.43 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576.095 | -43.58 | -25 | Pass | 401 |

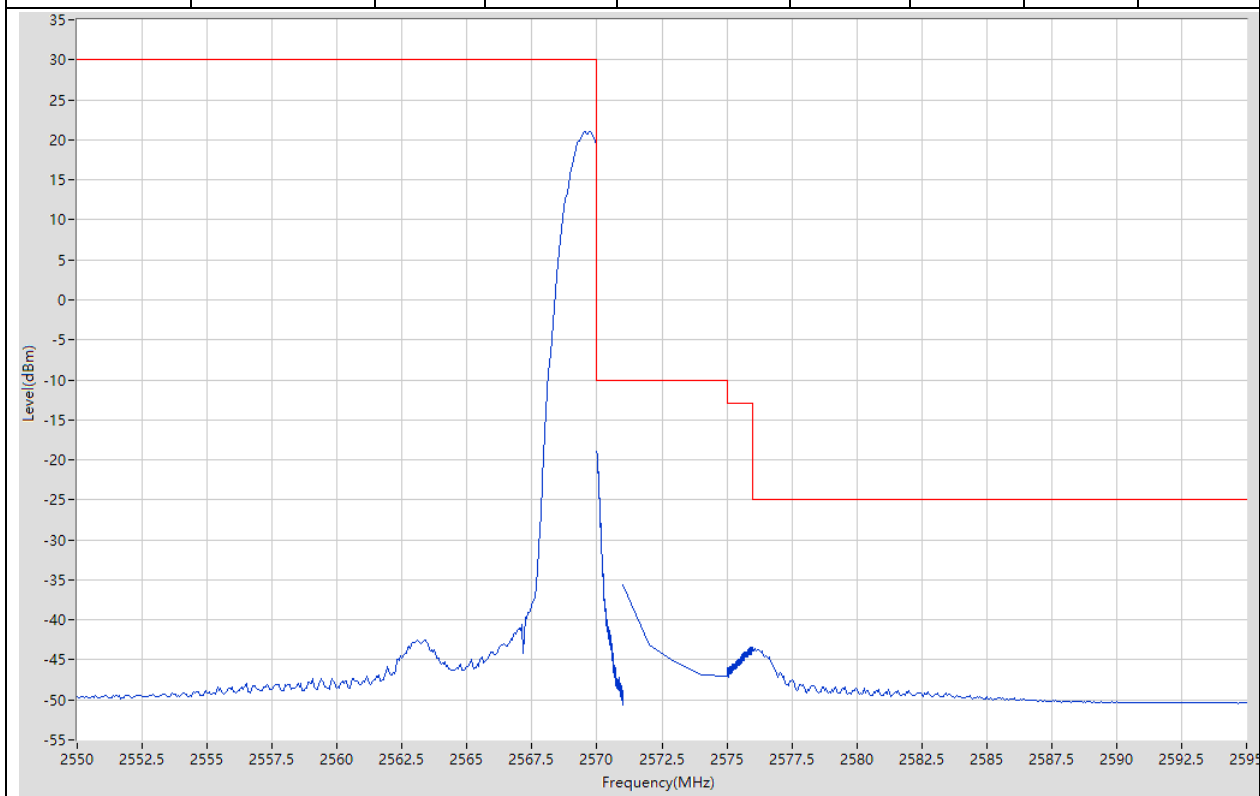


40.4. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, QPSK, NR RB:25@0, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2566.8 | 14.88 | 30 | Pass | 401 |
| 2570 | 2571 | 0.1 | RMS | 2570.005 | -26.05 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -32.24 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.978 | -36.55 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576.095 | -36.42 | -25 | Pass | 401 |

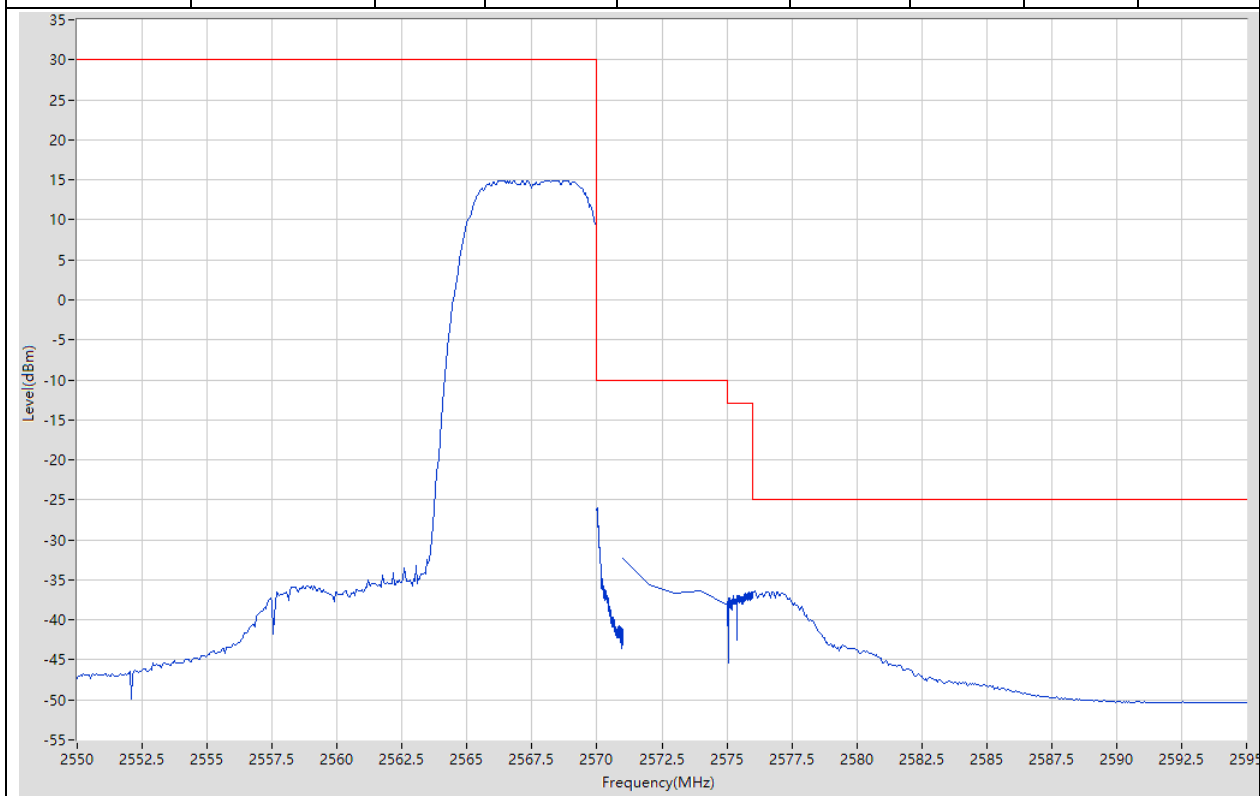


40.5. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2484.95 | -49.69 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2494.02 | -40.75 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -33.73 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -22.28 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.35 | 21.36 | 30 | Pass | 401 |

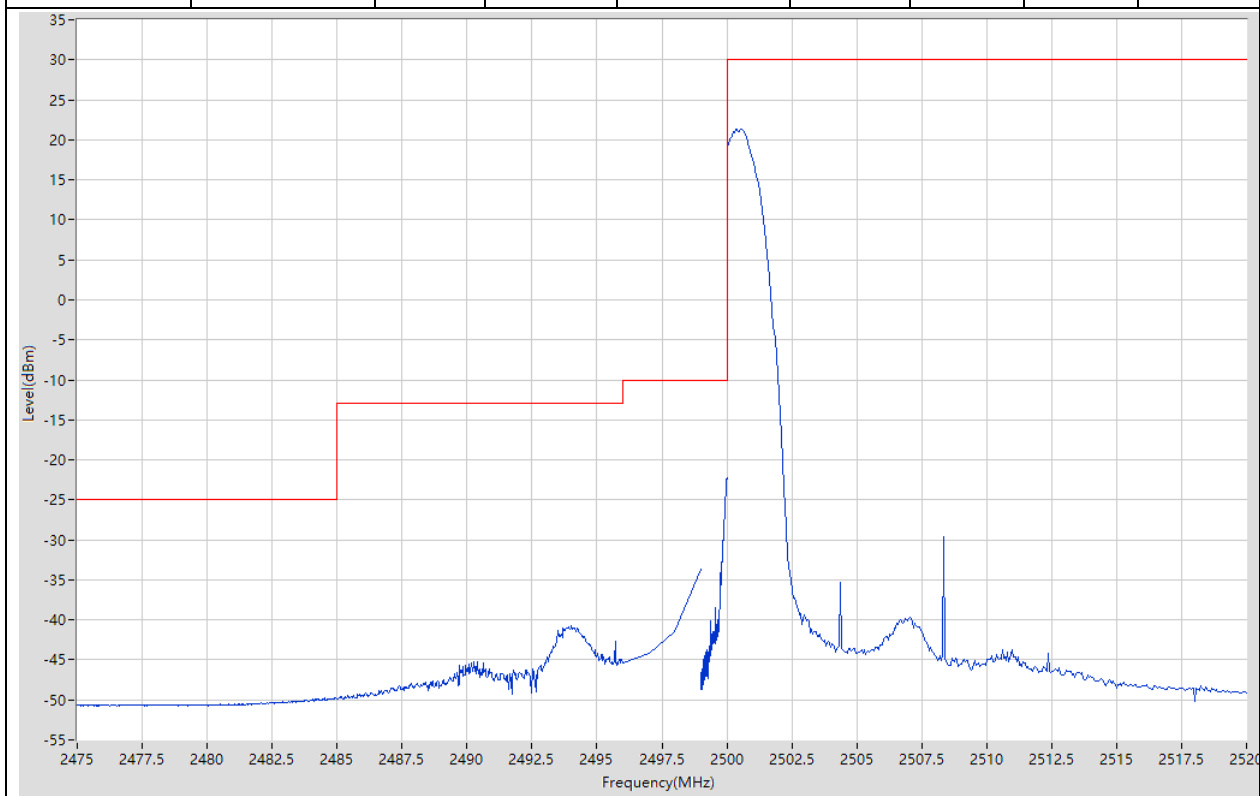


40.6. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:75@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2484.95 | -44.46 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2496 | -36.96 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -30.97 | -10 | Pass | 4 |
| 2499 | 2500 | 0.3 | RMS | 2499.998 | -24.62 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2512.95 | 10.63 | 30 | Pass | 401 |

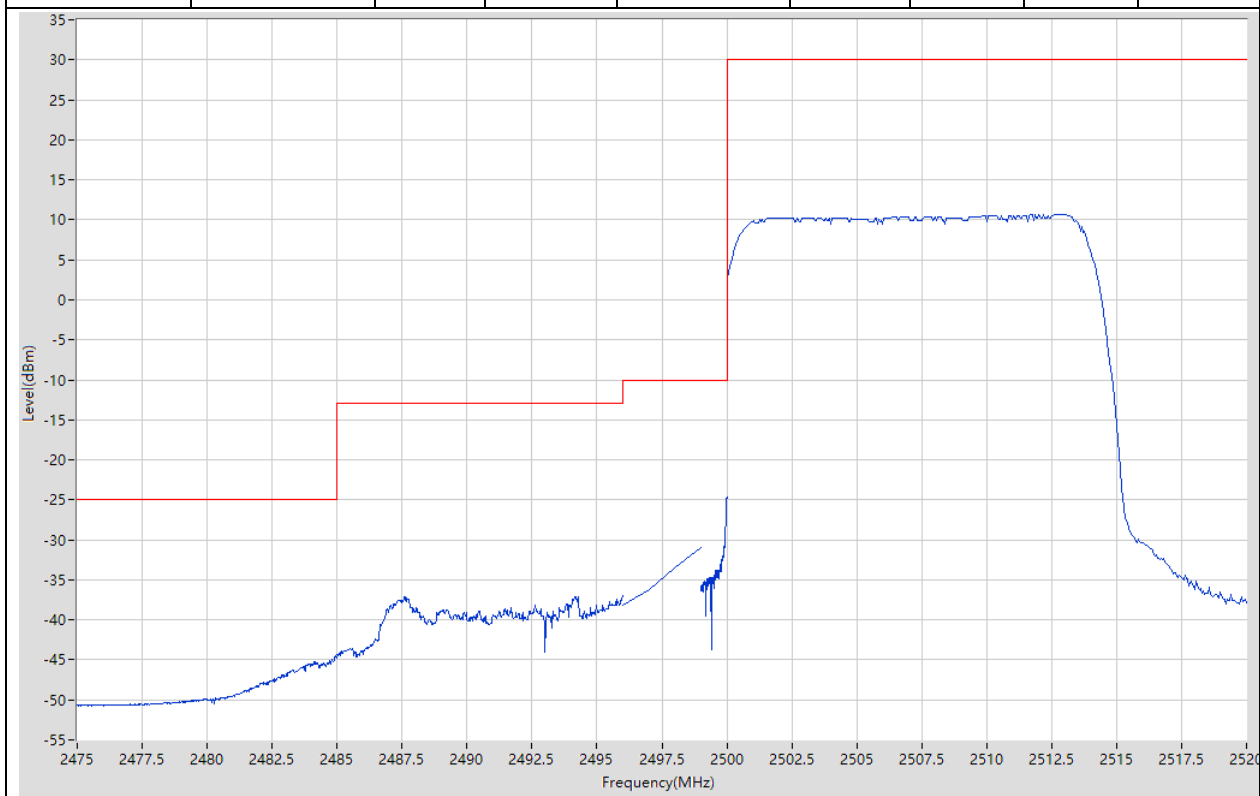

40.7. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:1 @78, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.5 | 21.37 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570.003 | -23.71 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -35.42 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2576 | -40.72 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2585.275 | -49.6 | -25 | Pass | 401 |

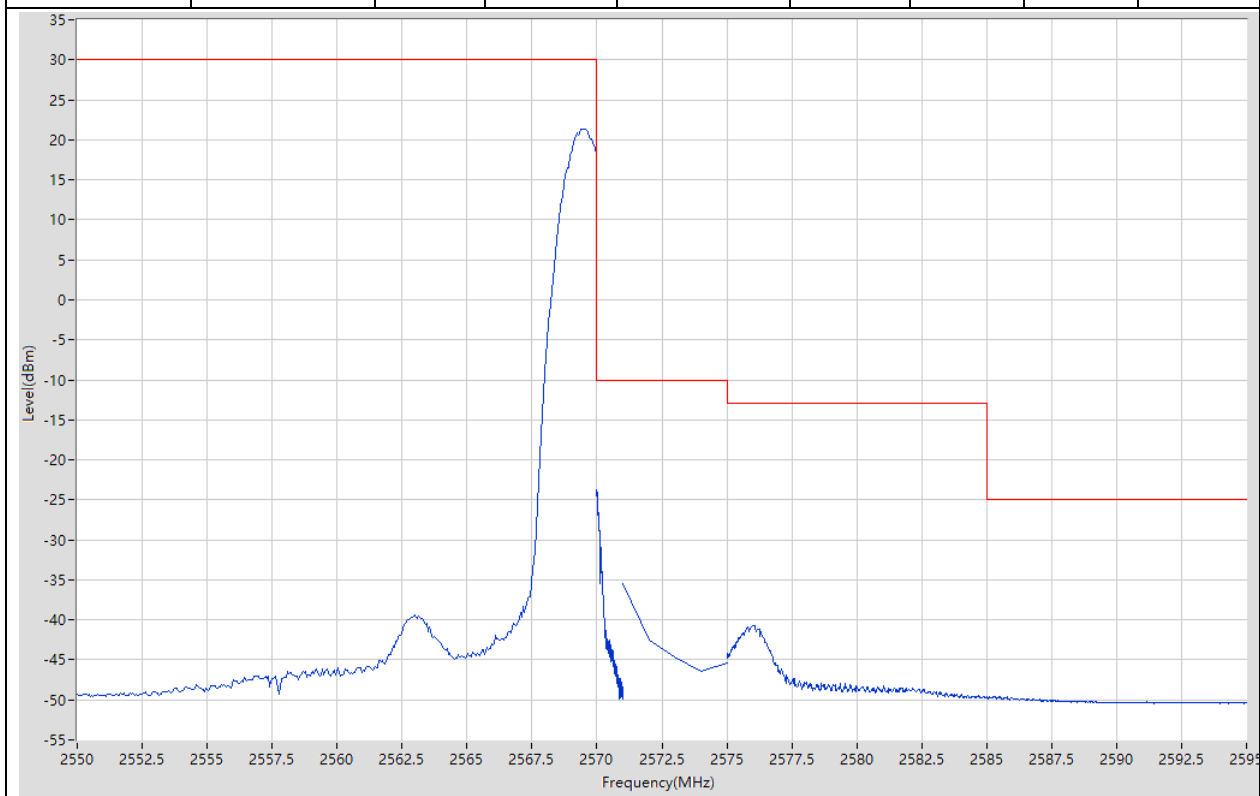


40.8. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, QPSK, NR RB:75@0, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2565.1 | 10.44 | 30 | Pass | 401 |
| 2570 | 2571 | 0.3 | RMS | 2570.068 | -33.25 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -30.88 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2579.225 | -37.15 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2585.3 | -43.54 | -25 | Pass | 401 |




40.9. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2477.013 | -50.58 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2493.88 | -40.33 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -33.82 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -25.48 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.5 | 21.36 | 30 | Pass | 401 |

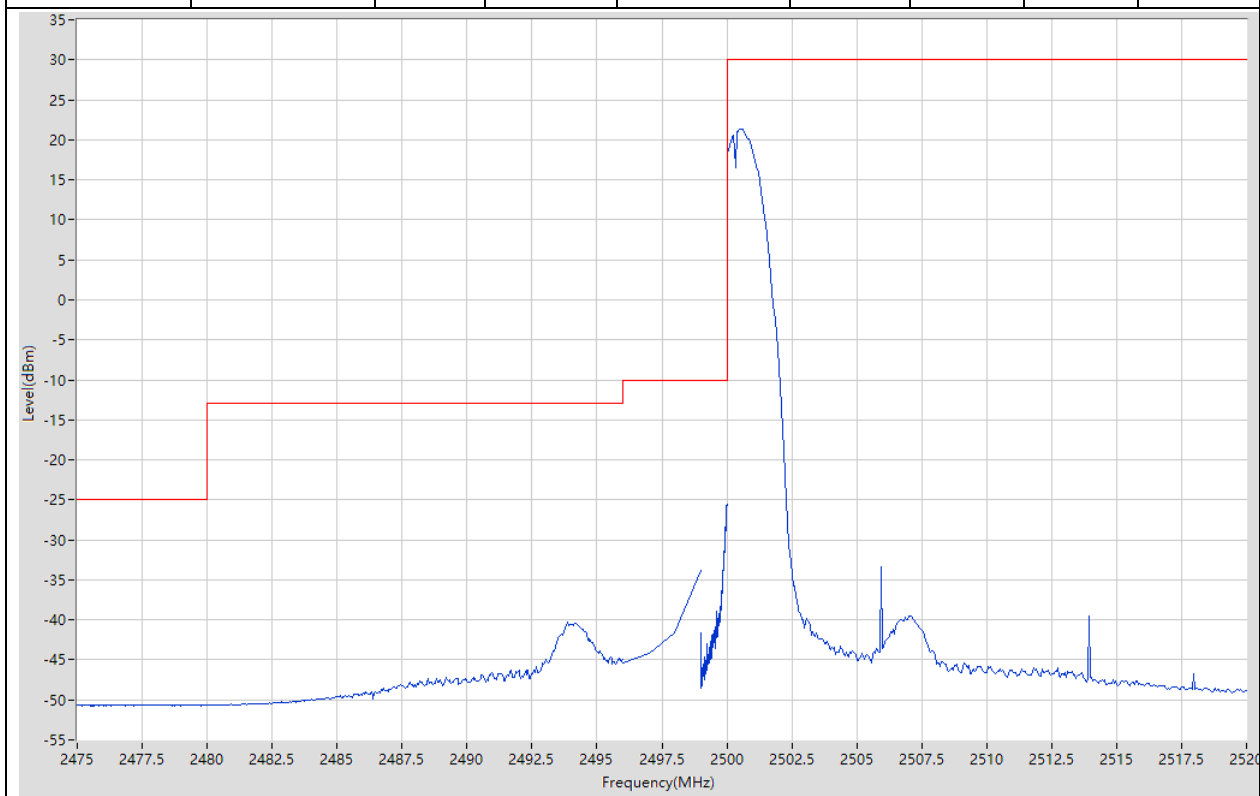


40.10. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2480 | -50.22 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2496 | -34.31 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -30.64 | -10 | Pass | 4 |
| 2499 | 2500 | 0.39 | RMS | 2500 | -21.7 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2514.9 | 9.54 | 30 | Pass | 401 |

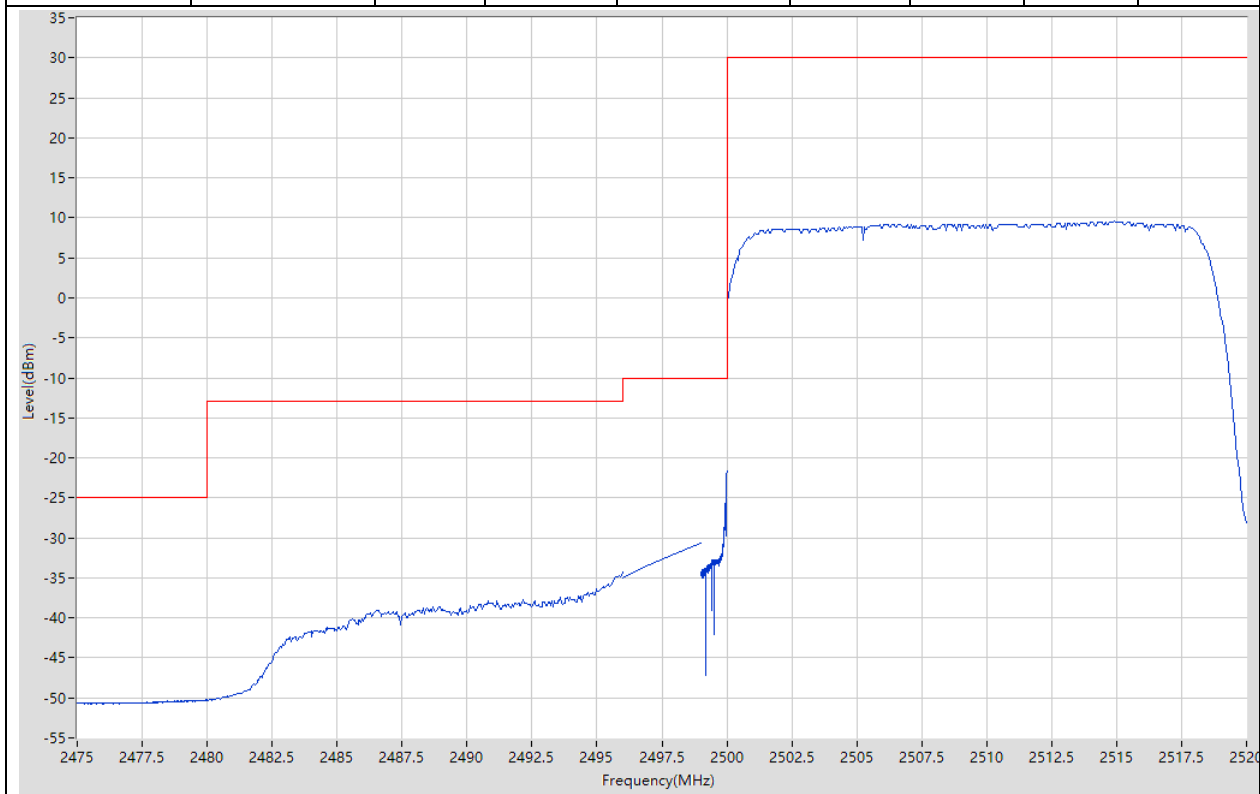


40.11. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:1@105, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.35 | 21.32 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570.003 | -27.22 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -35.02 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575.863 | -40.25 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590.838 | -50.24 | -25 | Pass | 401 |

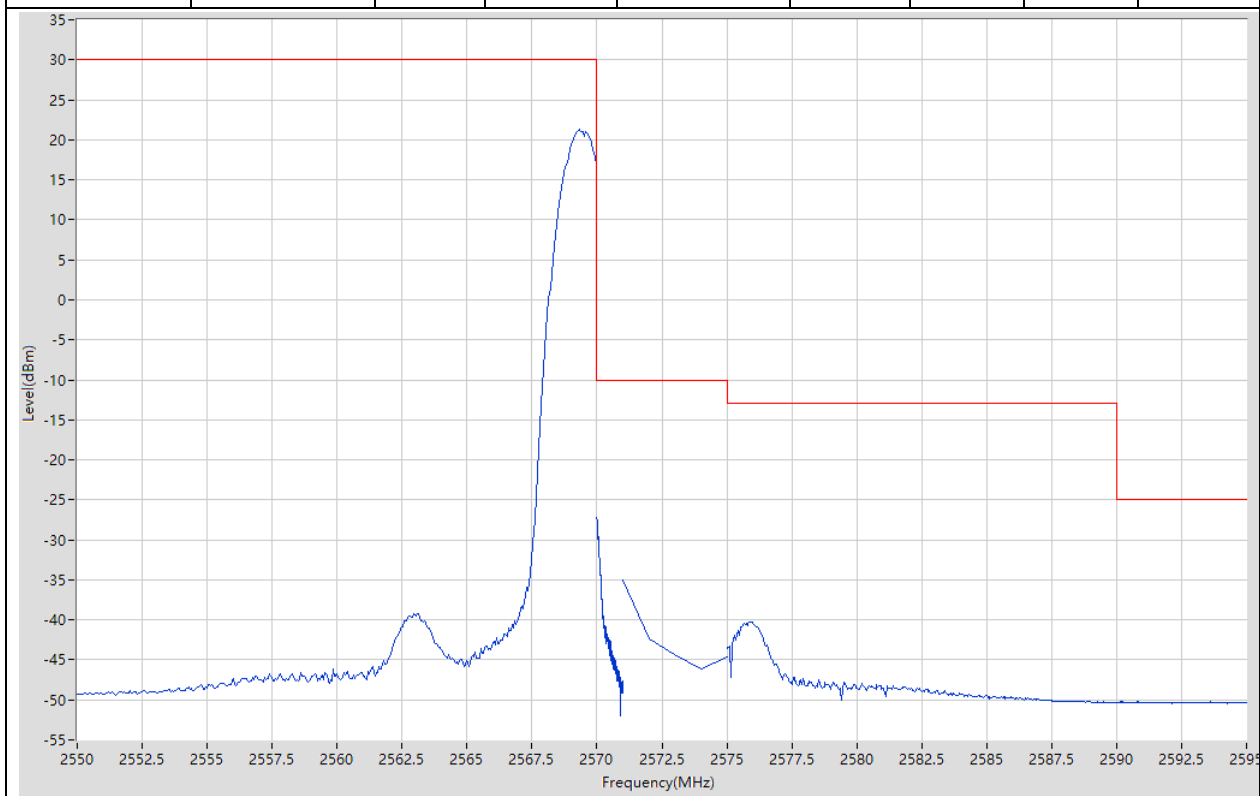


40.12. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, QPSK, NR RB:100@0, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2556.45 | 9.4 | 30 | Pass | 401 |
| 2570 | 2571 | 0.39 | RMS | 2570.01 | -32.03 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -29.88 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575 | -36.19 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590.075 | -49.08 | -25 | Pass | 401 |

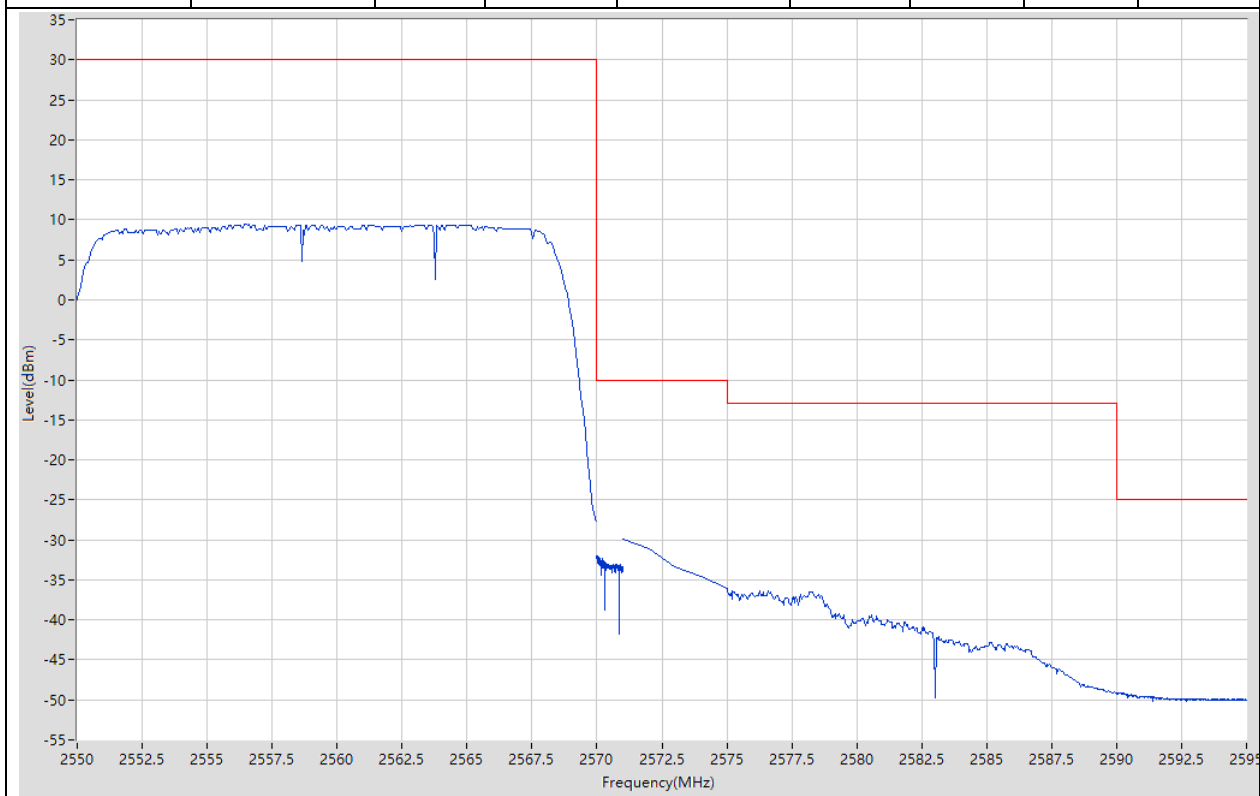


40.13. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2493.668 | -43.66 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2494.02 | -43.9 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -34.08 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -19.54 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.3 | 20.21 | 30 | Pass | 401 |

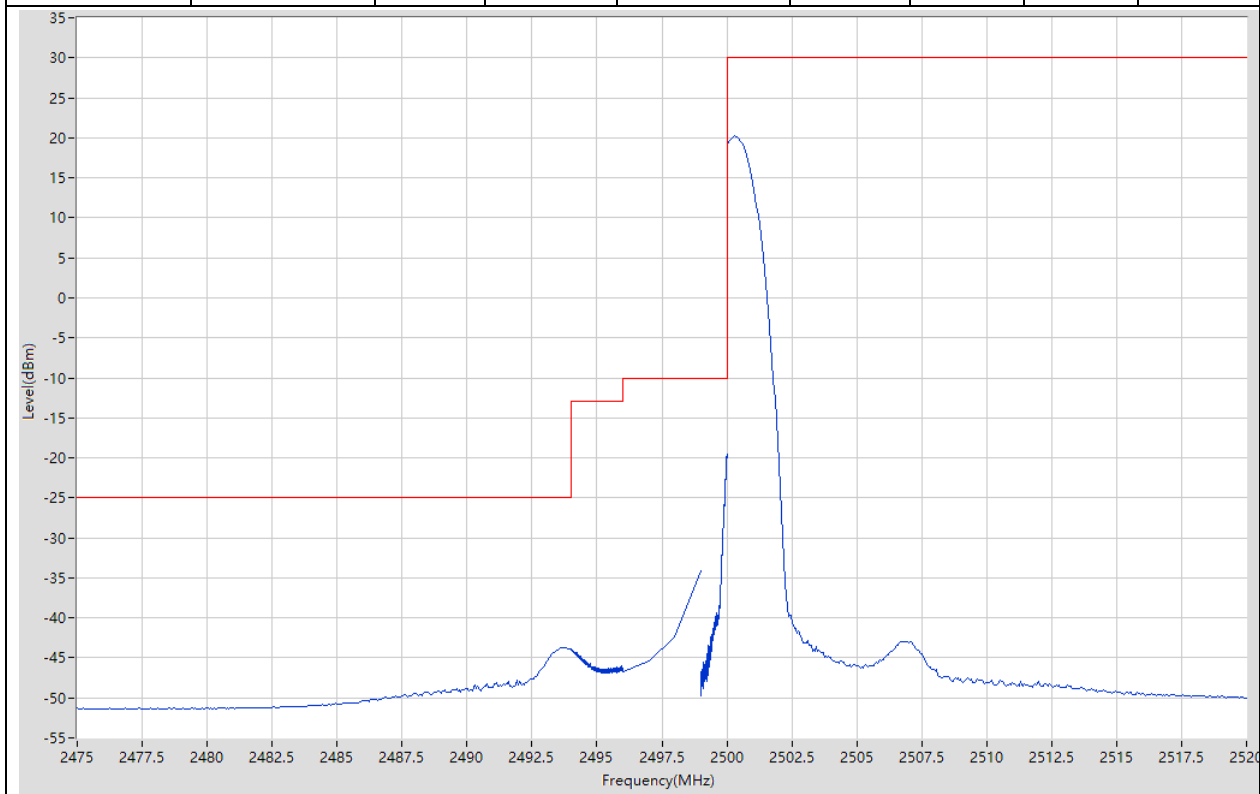


40.14. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:500500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2494 | 1 | RMS | 2493.668 | -39.74 | -25 | Pass | 401 |
| 2494 | 2496 | 1 | RMS | 2495.95 | -38.04 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -32.73 | -10 | Pass | 4 |
| 2499 | 2500 | 0.1 | RMS | 2500 | -27.66 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2501.45 | 13.9 | 30 | Pass | 401 |

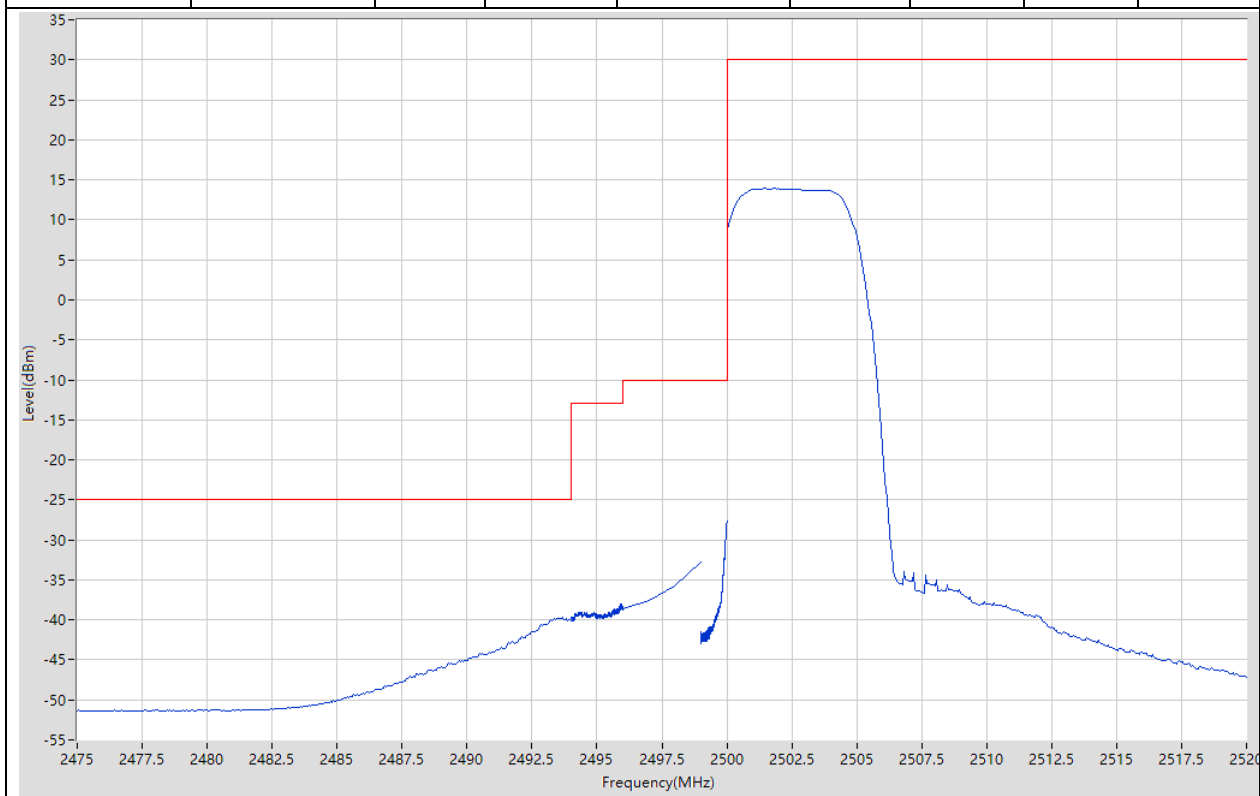


40.15. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@24, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.6 | 19.9 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570 | -19.39 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -36.02 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.998 | -45.43 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576.19 | -45.26 | -25 | Pass | 401 |

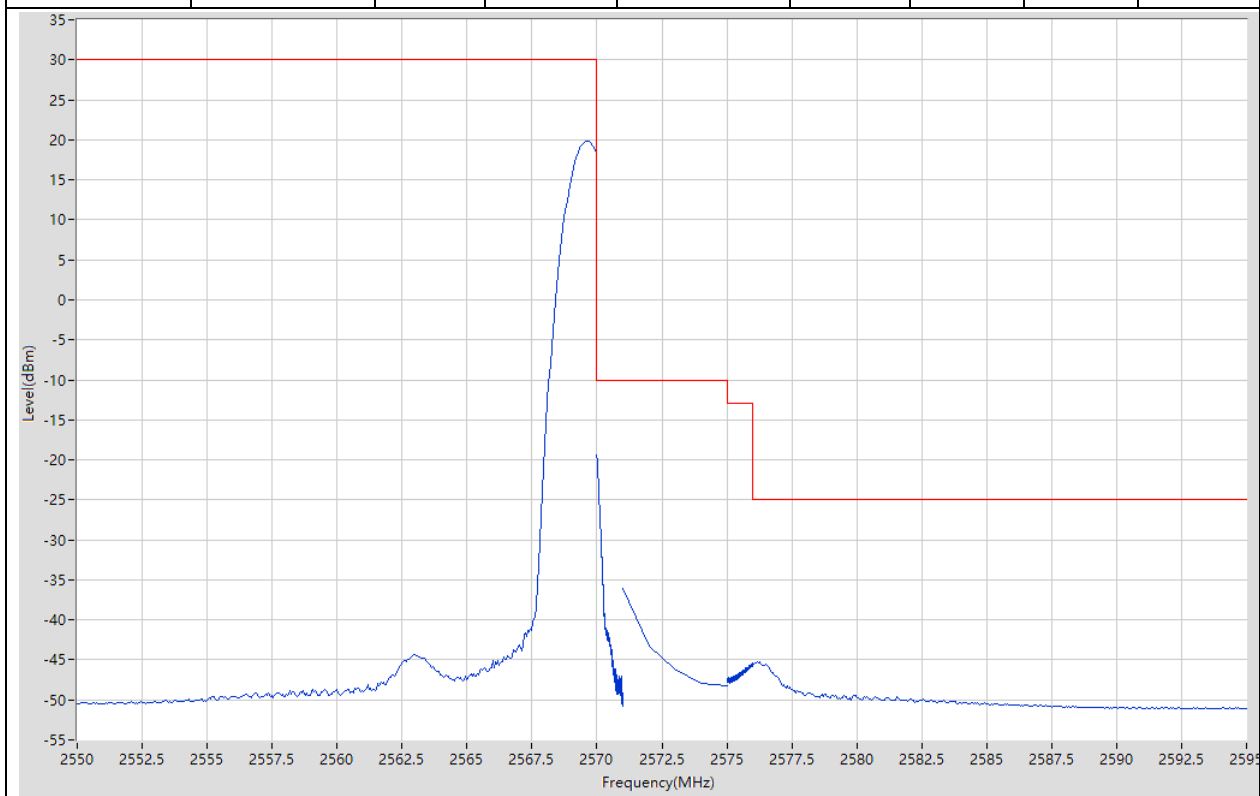


40.16. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:513500, NR BW:5, SCS:15, DFT-s-OFDM, 16QAM, NR RB:25@0, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2566.7 | 13.72 | 30 | Pass | 401 |
| 2570 | 2571 | 0.1 | RMS | 2570 | -28.79 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -33.07 | -10 | Pass | 5 |
| 2575 | 2576 | 1 | RMS | 2575.503 | -37.89 | -13 | Pass | 401 |
| 2576 | 2595 | 1 | RMS | 2576.048 | -38.43 | -25 | Pass | 401 |

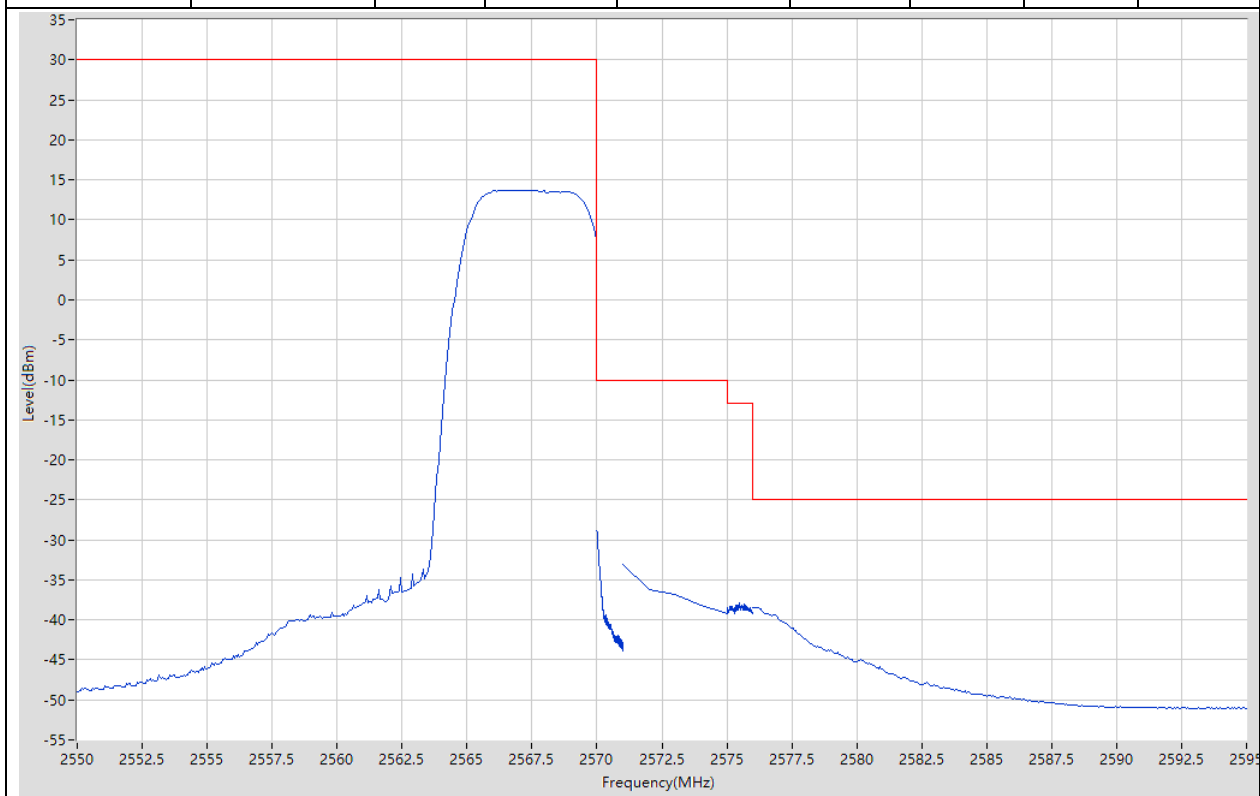


40.17. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2484.925 | -50.63 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2493.855 | -42.76 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -35.64 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -24.76 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.45 | 20.25 | 30 | Pass | 401 |

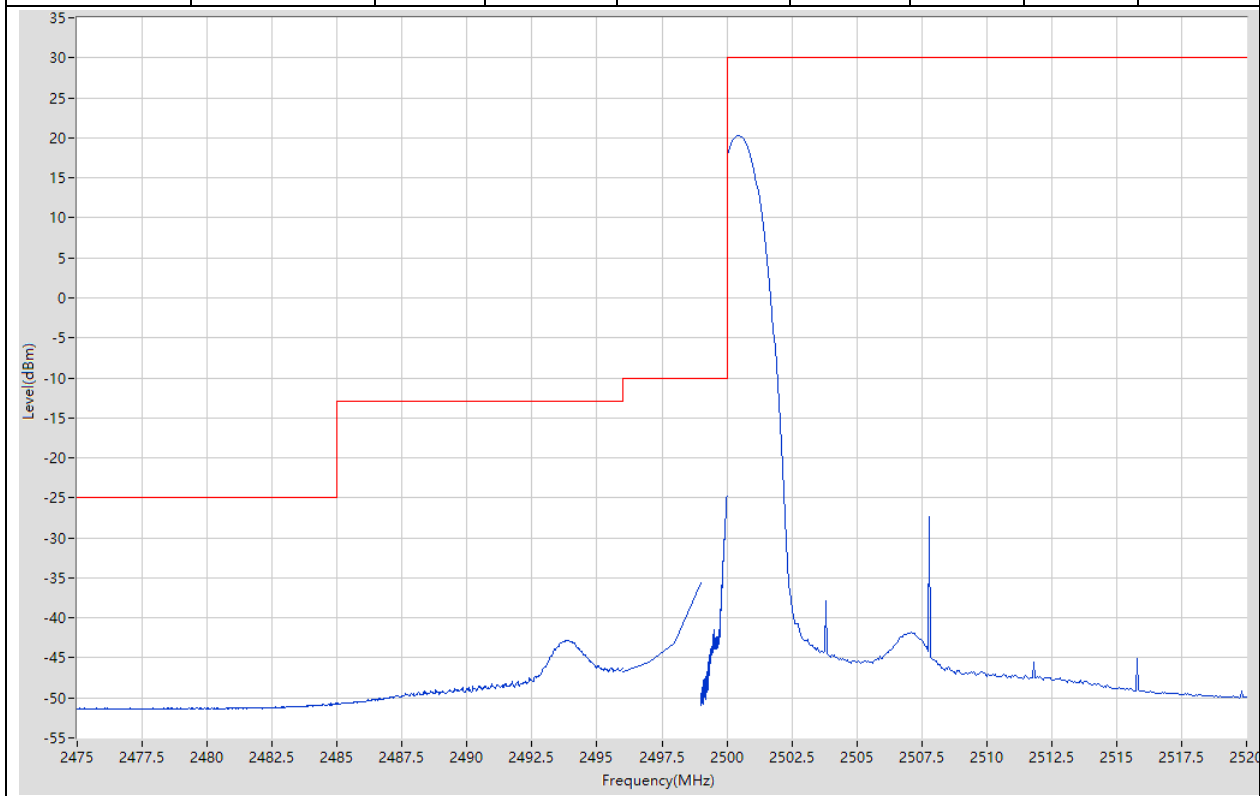


40.18. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:501500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:75@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2485 | 1 | RMS | 2485 | -45.17 | -25 | Pass | 401 |
| 2485 | 2496 | 1 | RMS | 2495.615 | -37.06 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -32.8 | -10 | Pass | 4 |
| 2499 | 2500 | 0.3 | RMS | 2500 | -24.66 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2512.7 | 9.3 | 30 | Pass | 401 |

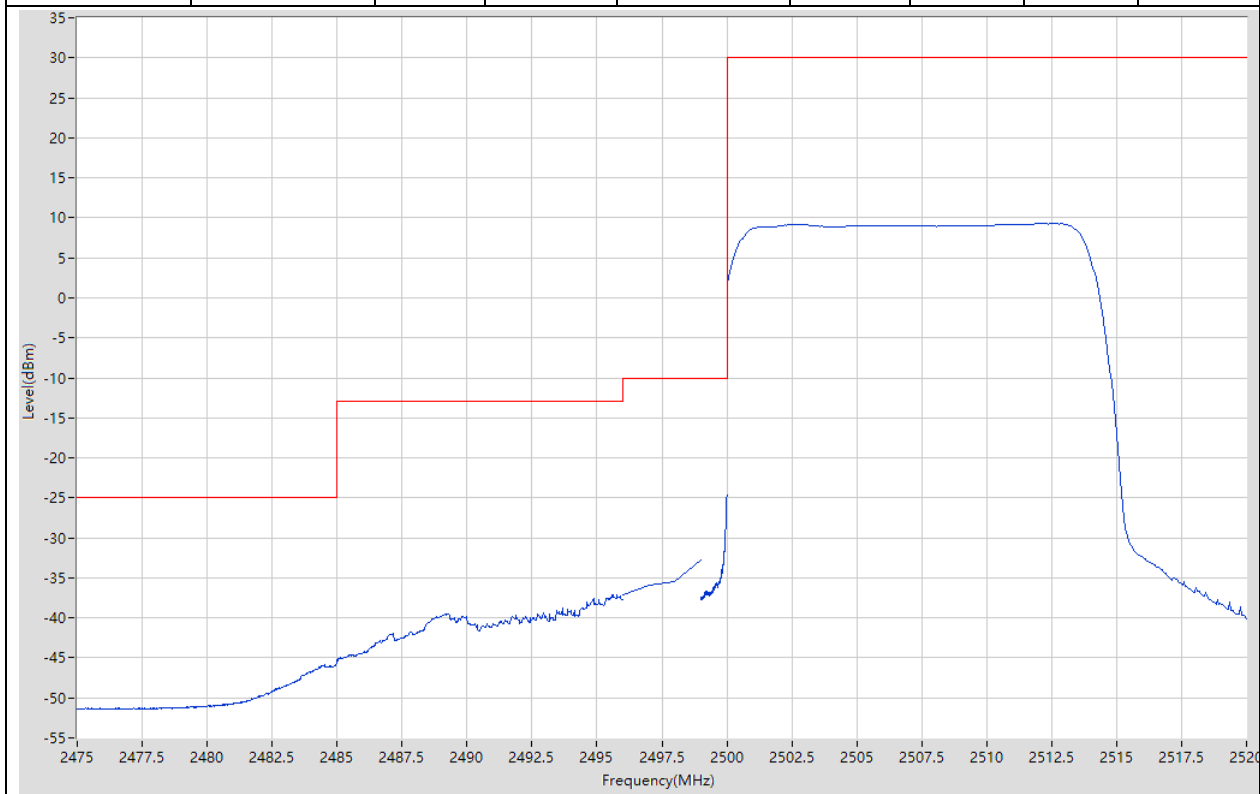


40.19. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@78, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.5 | 19.94 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570 | -24.49 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -36.3 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2576.125 | -43.44 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2585.325 | -50.41 | -25 | Pass | 401 |

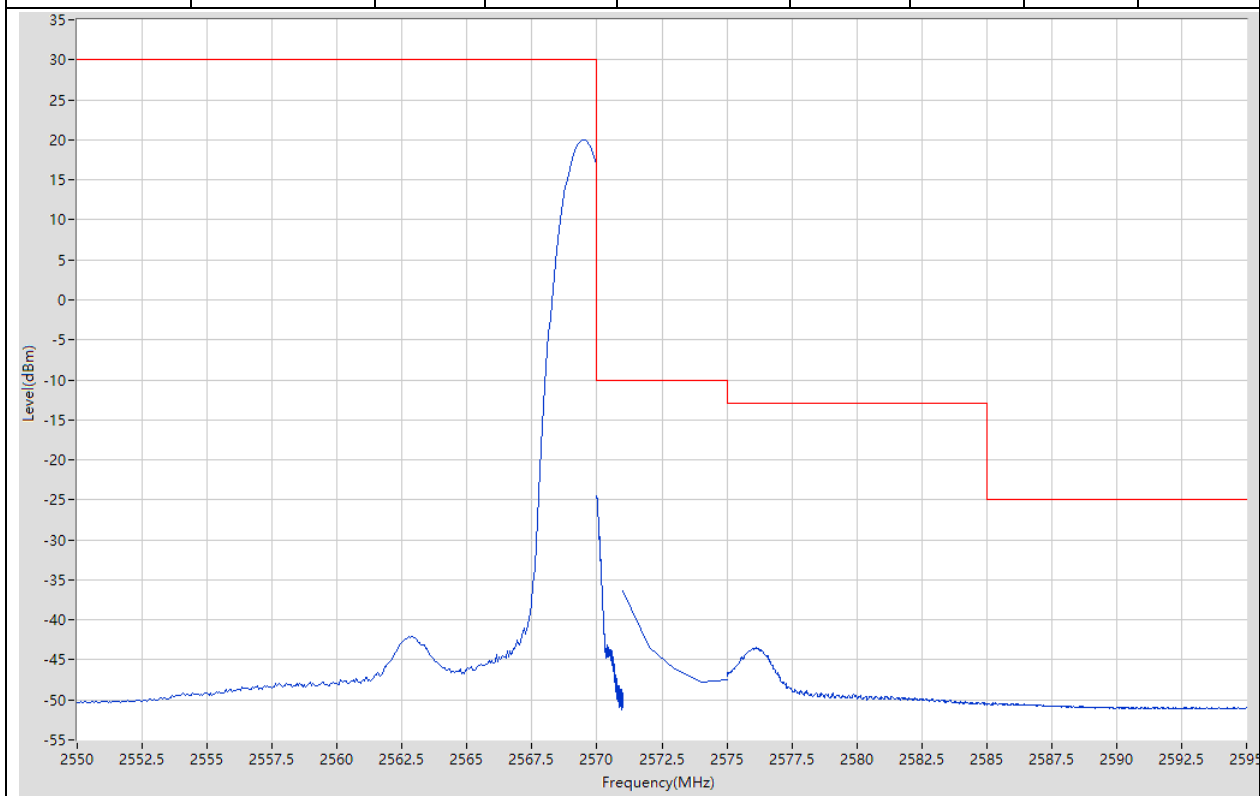


40.20. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512500, NR BW:15, SCS:15, DFT-s-OFDM, 16QAM, NR RB:75@0, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2557.7 | 9.12 | 30 | Pass | 401 |
| 2570 | 2571 | 0.3 | RMS | 2570.028 | -35.33 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -32.85 | -10 | Pass | 5 |
| 2575 | 2585 | 1 | RMS | 2575.15 | -39.28 | -13 | Pass | 401 |
| 2585 | 2595 | 1 | RMS | 2585.2 | -43.77 | -25 | Pass | 401 |

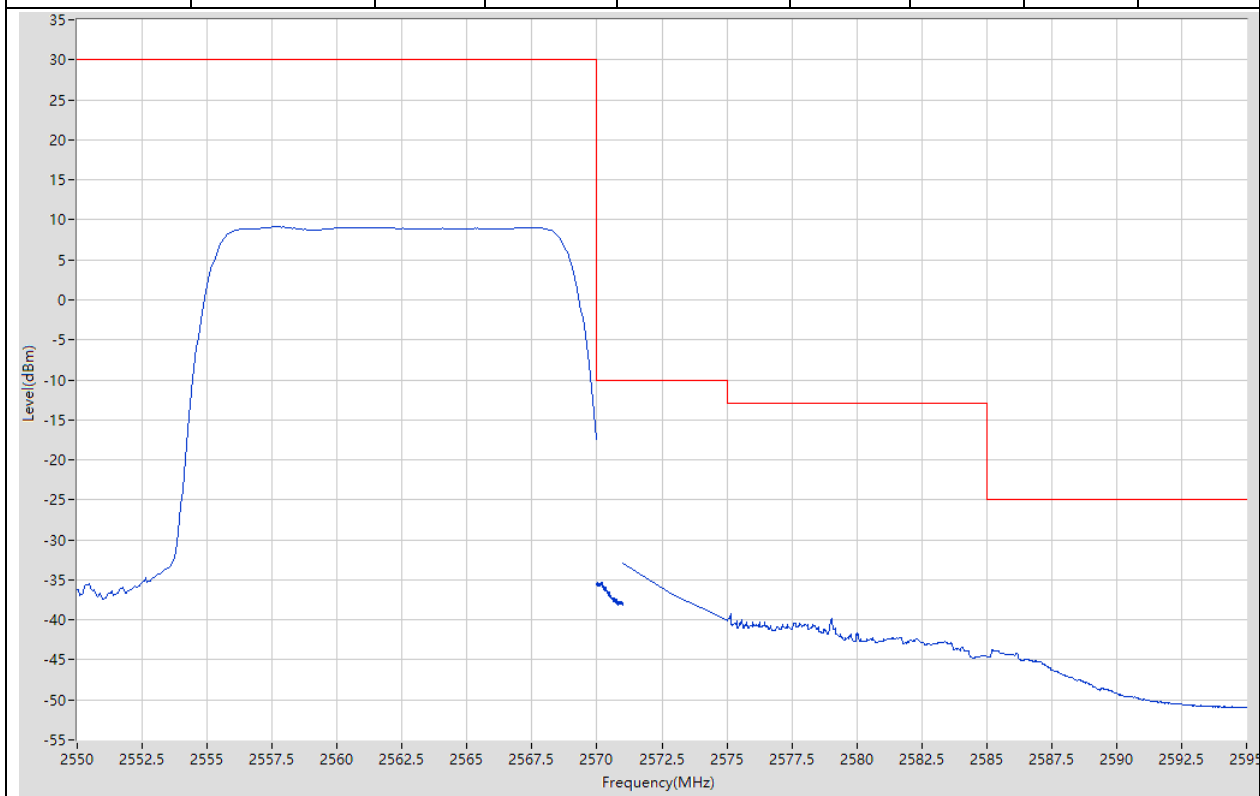


40.21. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:3, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2479.213 | -51.25 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2493.92 | -42.54 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -36.66 | -10 | Pass | 4 |
| 2499 | 2500 | 0.051 | RMS | 2500 | -28.4 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2500.5 | 20.26 | 30 | Pass | 401 |

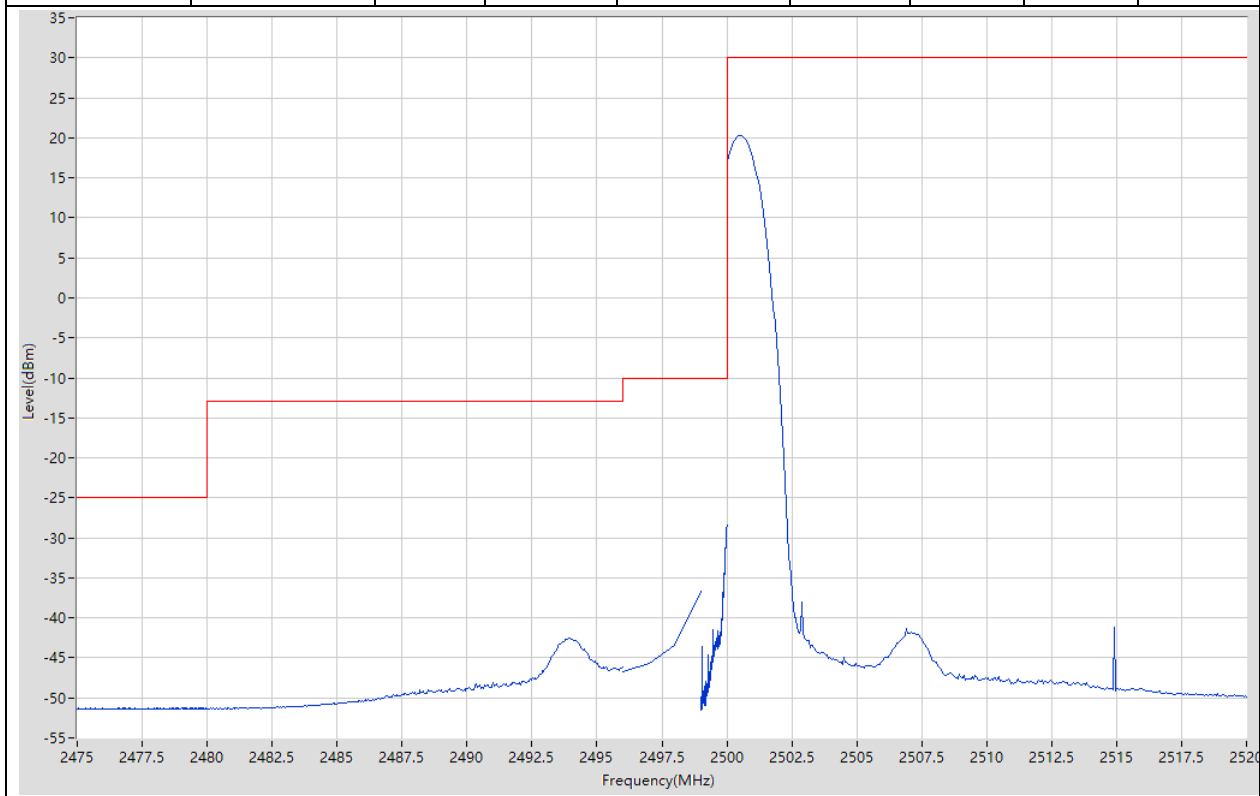


40.22. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:4, NR Ch:502000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:132072, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2475 | 2480 | 1 | RMS | 2479.863 | -50.95 | -25 | Pass | 401 |
| 2480 | 2496 | 1 | RMS | 2496 | -36.05 | -13 | Pass | 401 |
| 2496 | 2499 | 1 | RMS | 2499 | -32.34 | -10 | Pass | 4 |
| 2499 | 2500 | 0.39 | RMS | 2500 | -21.56 | -10 | Pass | 401 |
| 2500 | 2520 | 1 | RMS | 2510.2 | 8.15 | 30 | Pass | 401 |

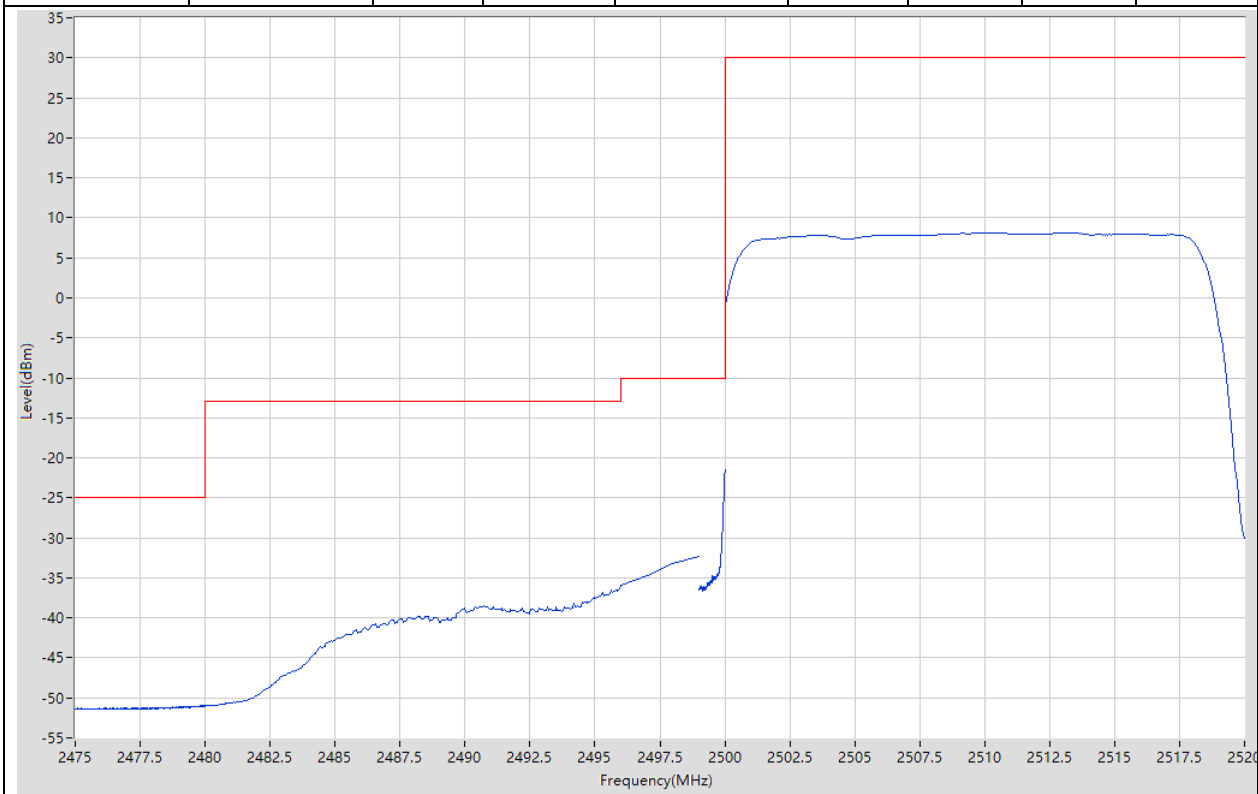


40.23. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:7, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:1@105, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2569.4 | 19.9 | 30 | Pass | 401 |
| 2570 | 2571 | 0.051 | RMS | 2570 | -28.4 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -37.2 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575.938 | -42.96 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590.275 | -50.93 | -25 | Pass | 401 |

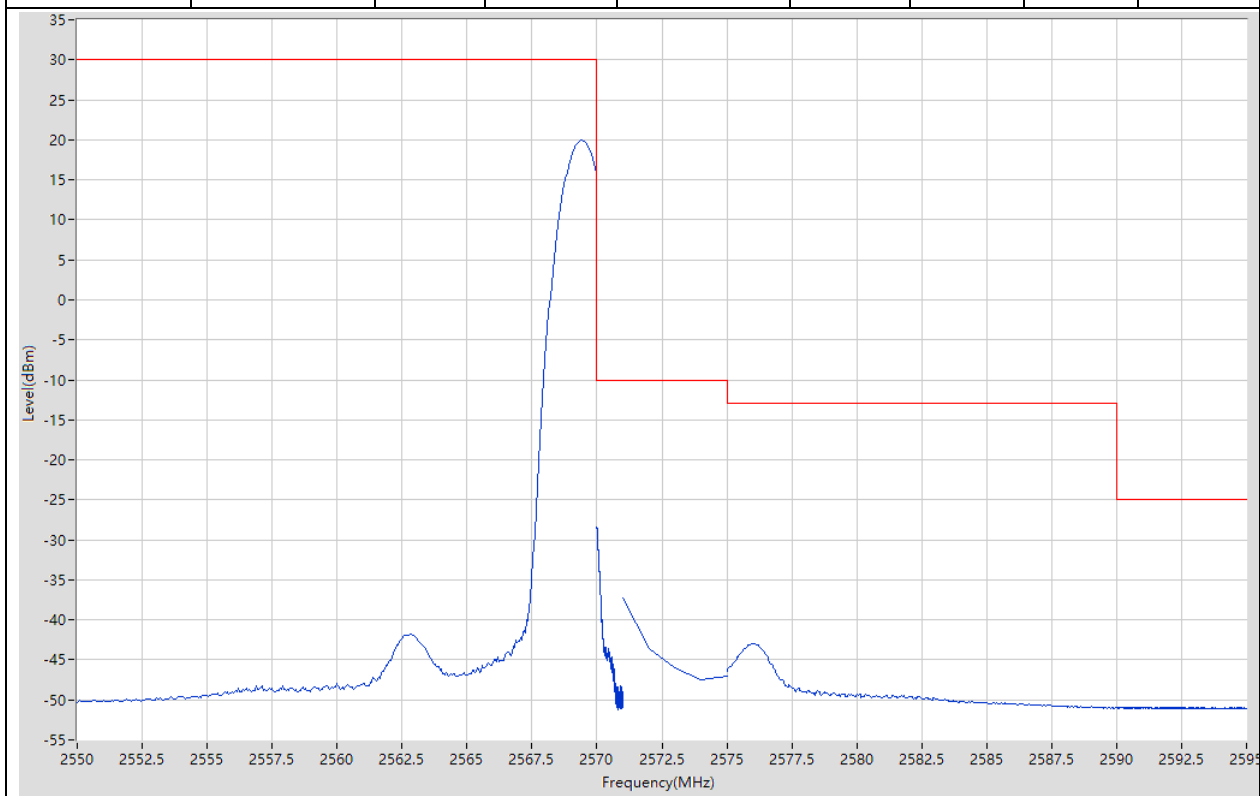

40.24. Band Edge for Inter-band EN-DC within FR1(NTNV)(Subtest:8, NR Ch:512000, NR BW:20, SCS:15, DFT-s-OFDM, 16QAM, NR RB:100@0, LTE Ch:132572, LTE BW:20, QPSK, LTE RB:100@0)

| Start Frequency (MHz) | Stop Frequency (MHz) | RBW (MHz) | Detector | Frequency (MHz) | Power (dBm) | Limit (dBm) | Verdict | Sweep Point |
|-----------------------|----------------------|-----------|----------|-----------------|-------------|-------------|---------|-------------|
| 2550 | 2570 | 1 | RMS | 2560.15 | 8.21 | 30 | Pass | 401 |
| 2570 | 2571 | 0.39 | RMS | 2570.108 | -35.13 | -10 | Pass | 401 |
| 2571 | 2575 | 1 | RMS | 2571 | -32.79 | -10 | Pass | 5 |
| 2575 | 2590 | 1 | RMS | 2575.038 | -37.8 | -13 | Pass | 401 |
| 2590 | 2595 | 1 | RMS | 2590 | -49.49 | -25 | Pass | 401 |

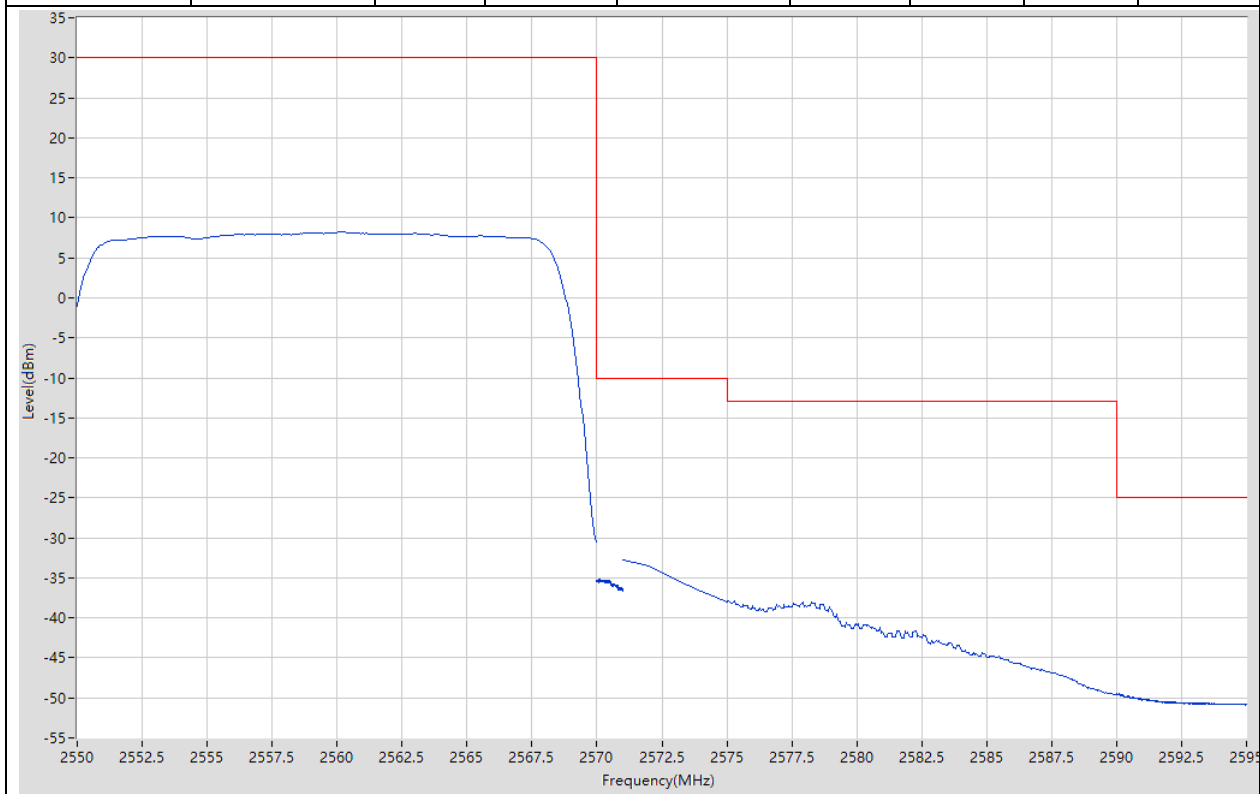

END