




11N20MIMO\_Ant12\_2462

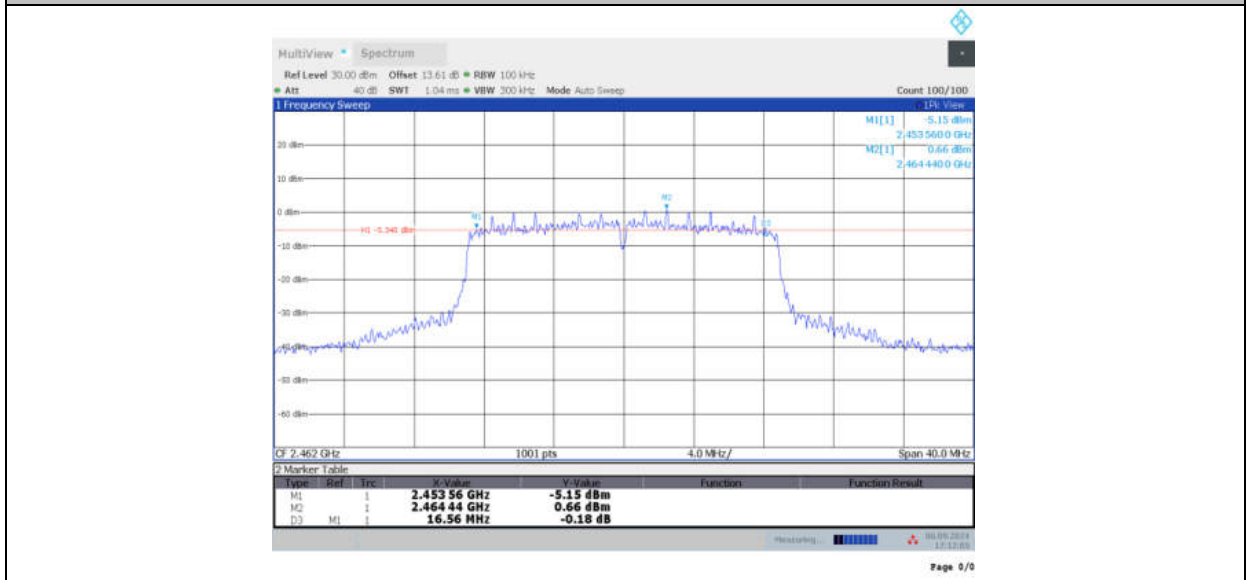


11N20MIMO\_Ant7\_2462

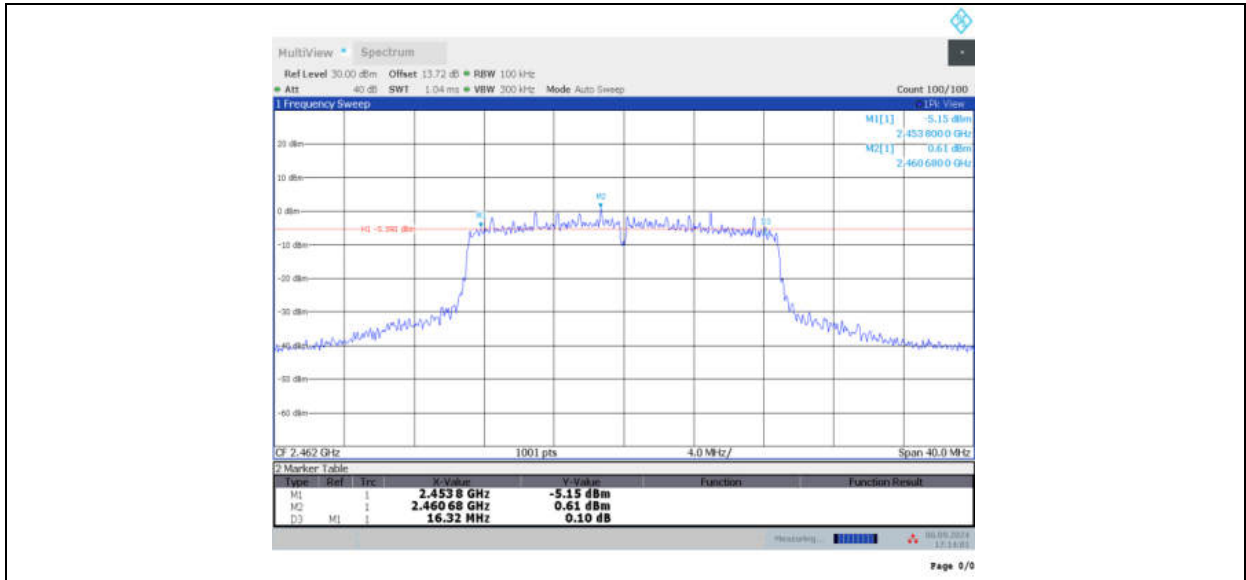


11AC20MIMO\_Ant12\_2412

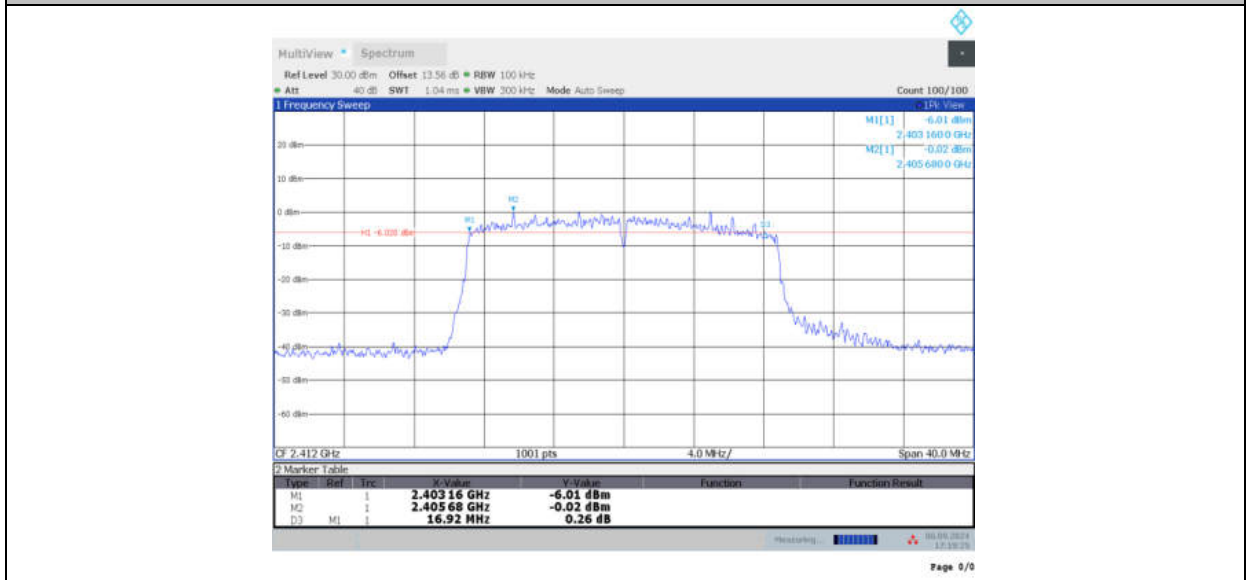


11AC20MIMO\_Ant7\_2412

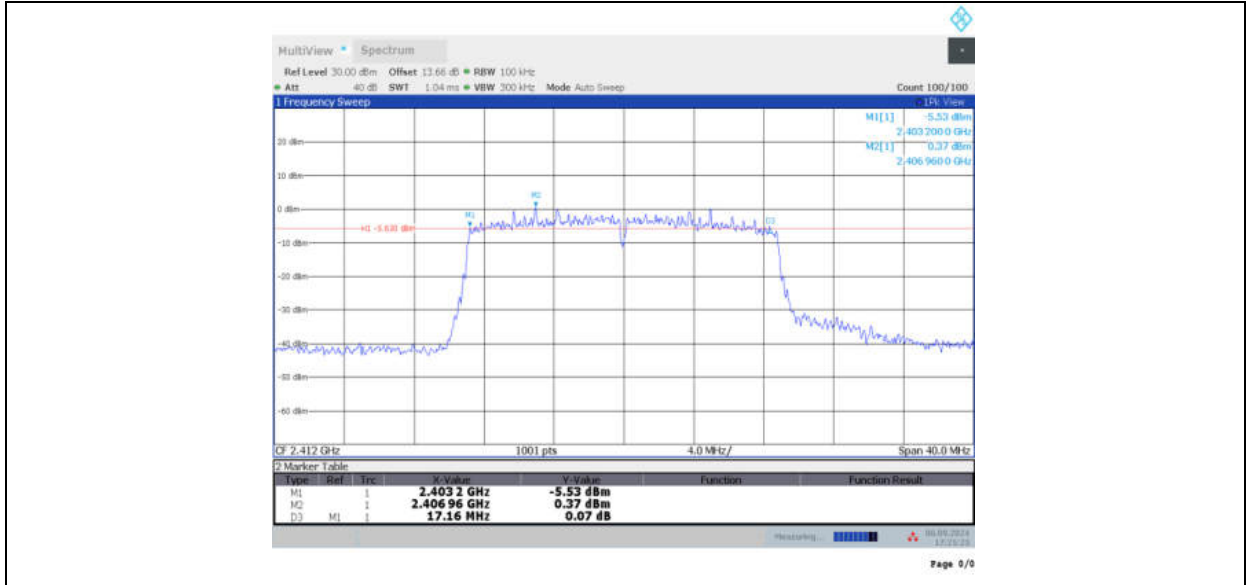


11AC20MIMO\_Ant12\_2437

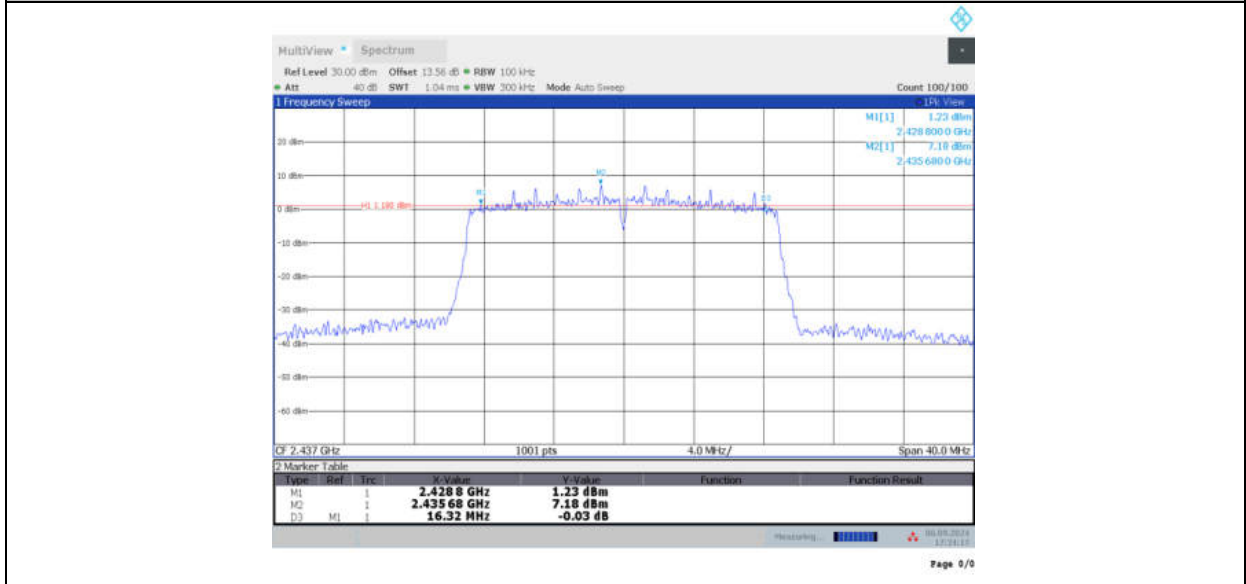


11AC20MIMO\_Ant7\_2437

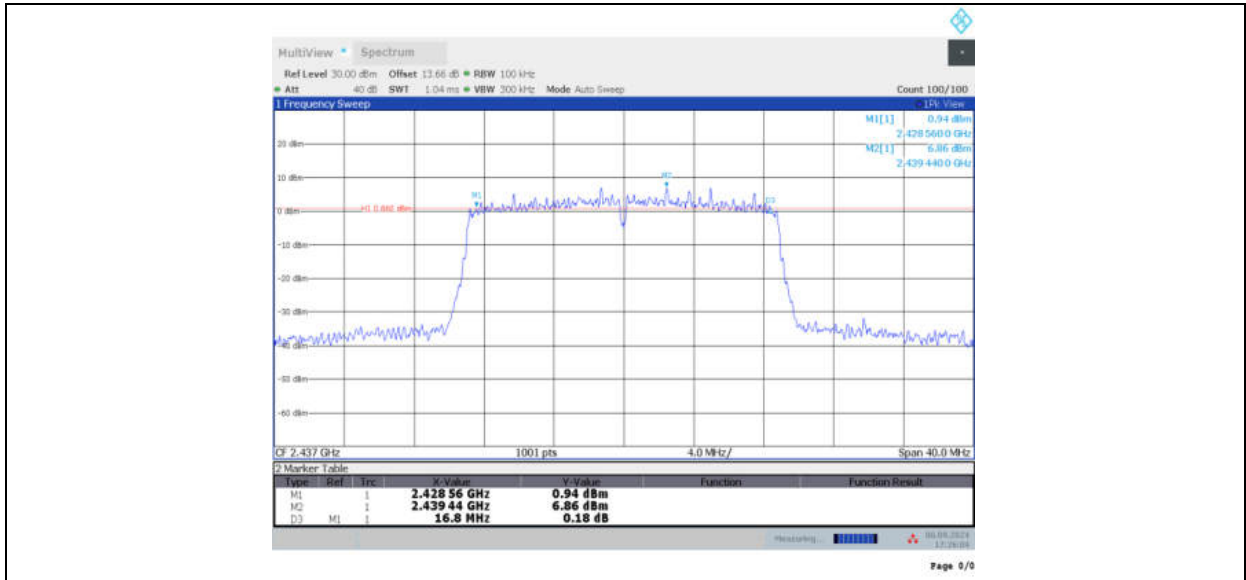


11AC20MIMO\_Ant12\_2462

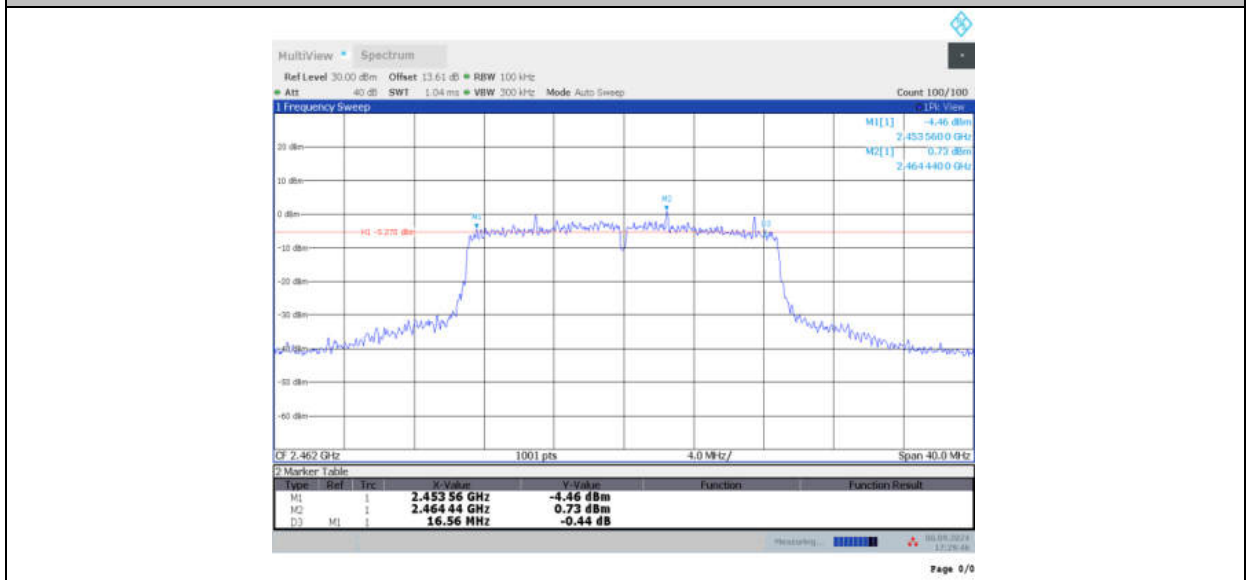


11AC20MIMO\_Ant7\_2462

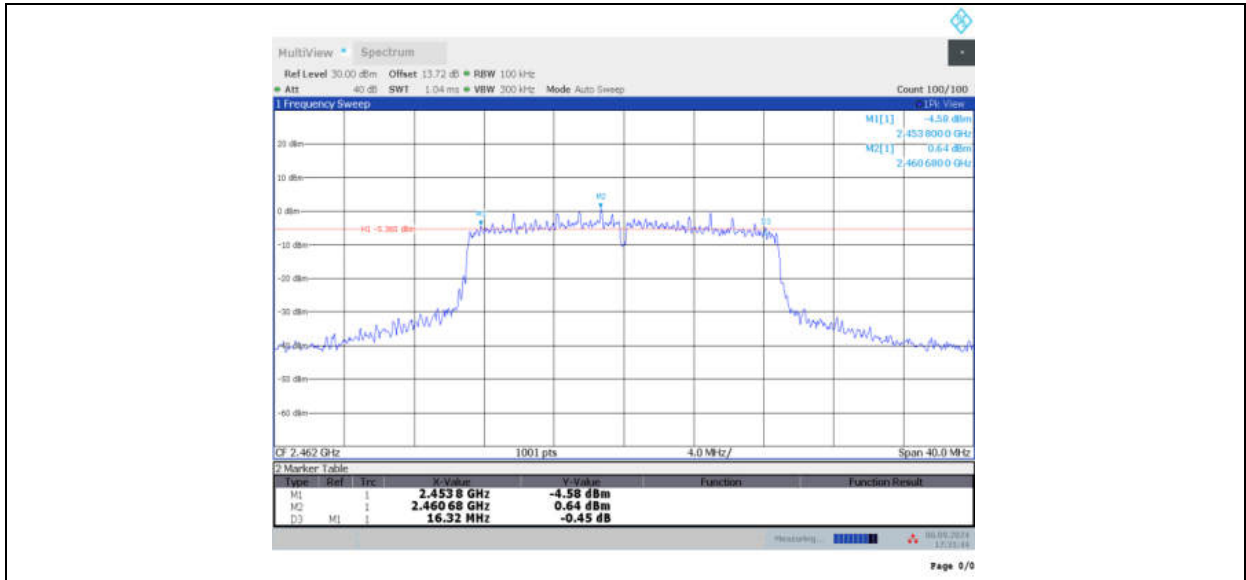


11AX20MIMO\_Ant12\_2412

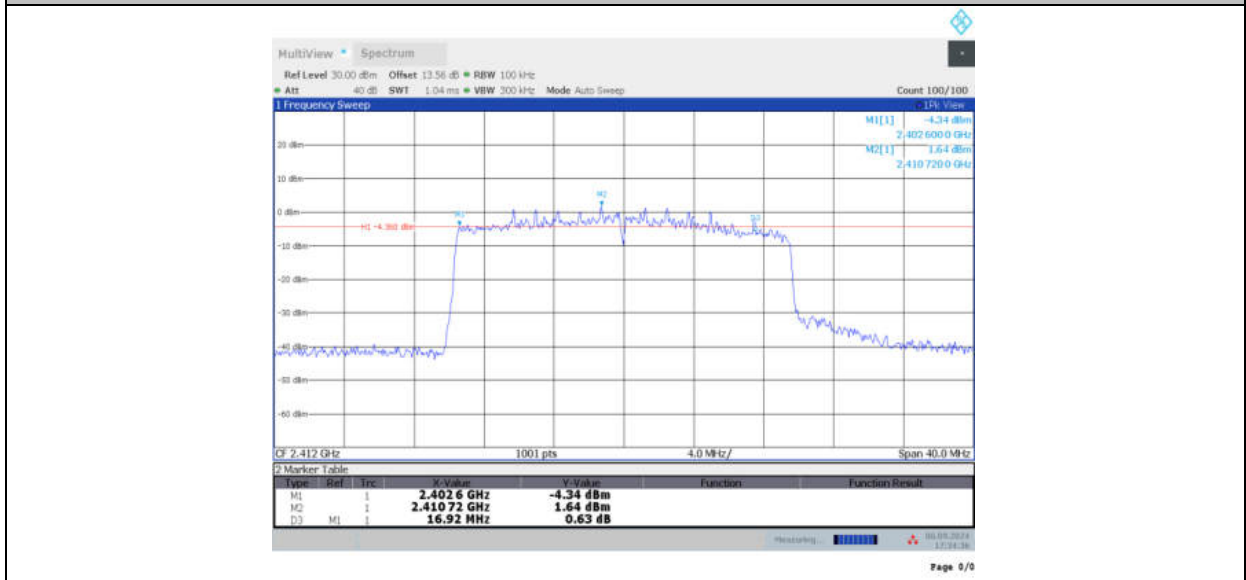


11AX20MIMO\_Ant7\_2412

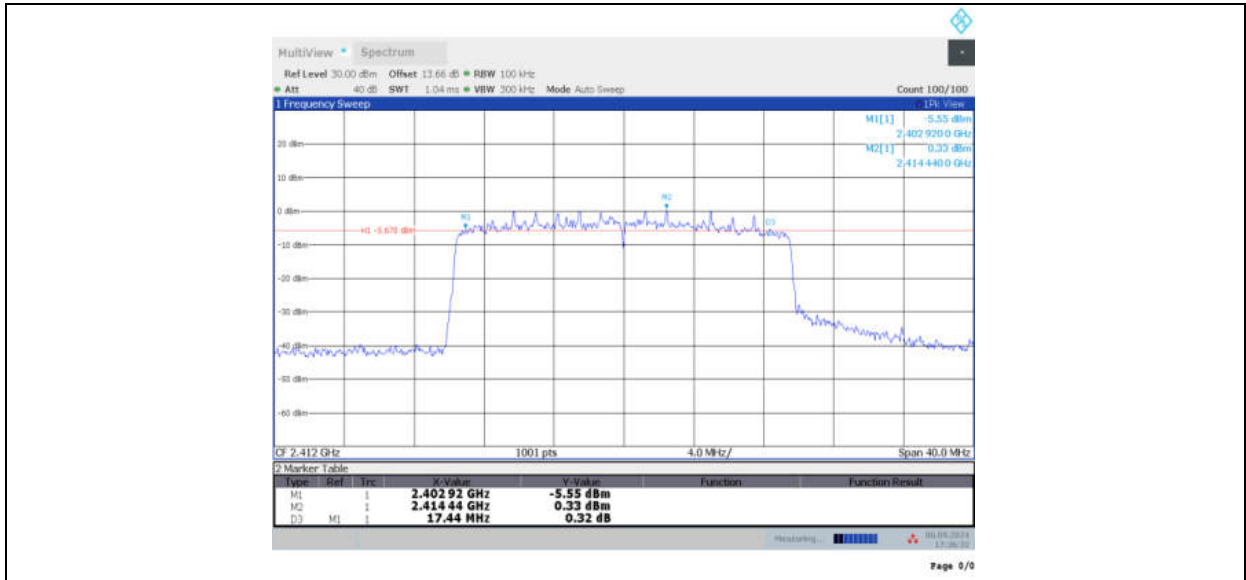


11AX20MIMO\_Ant12\_2437

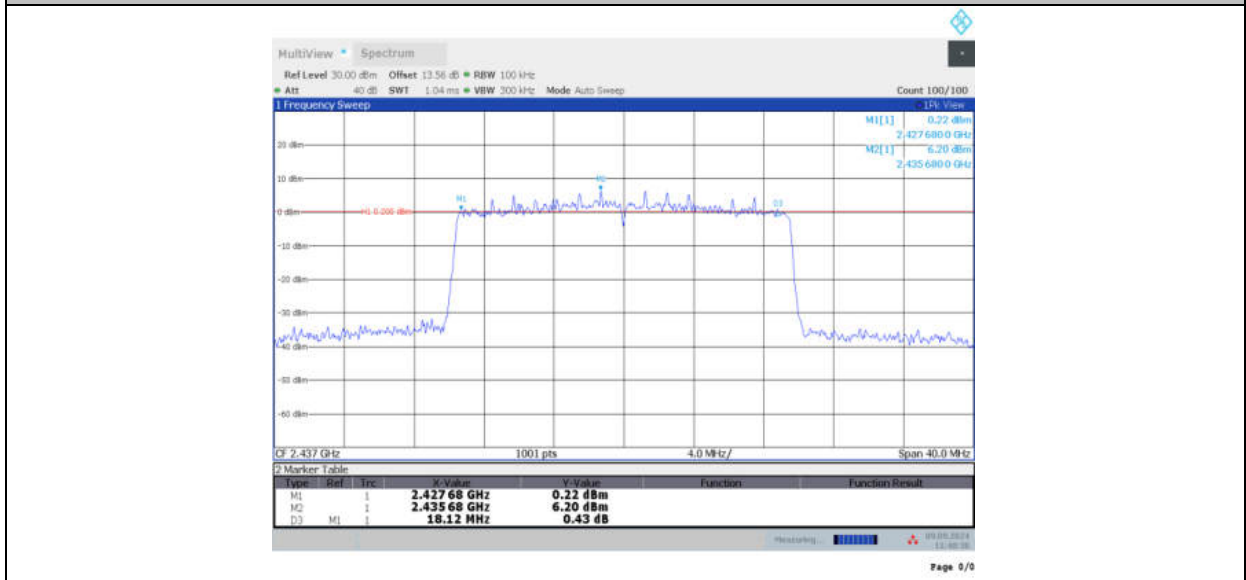


11AX20MIMO\_Ant7\_2437

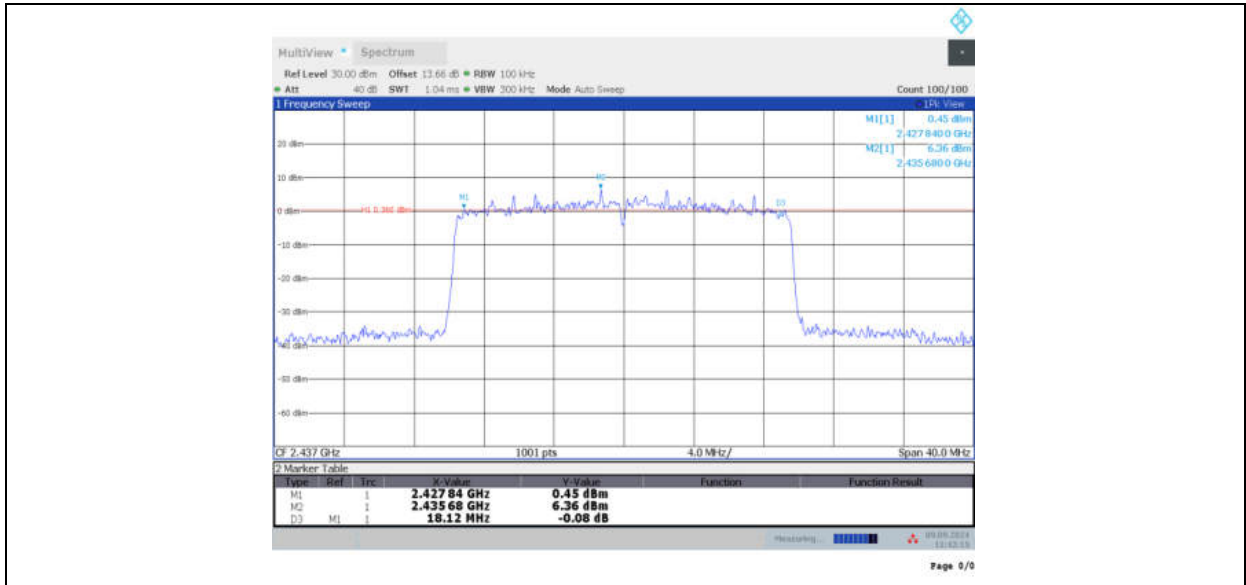


11AX20MIMO\_Ant12\_2462

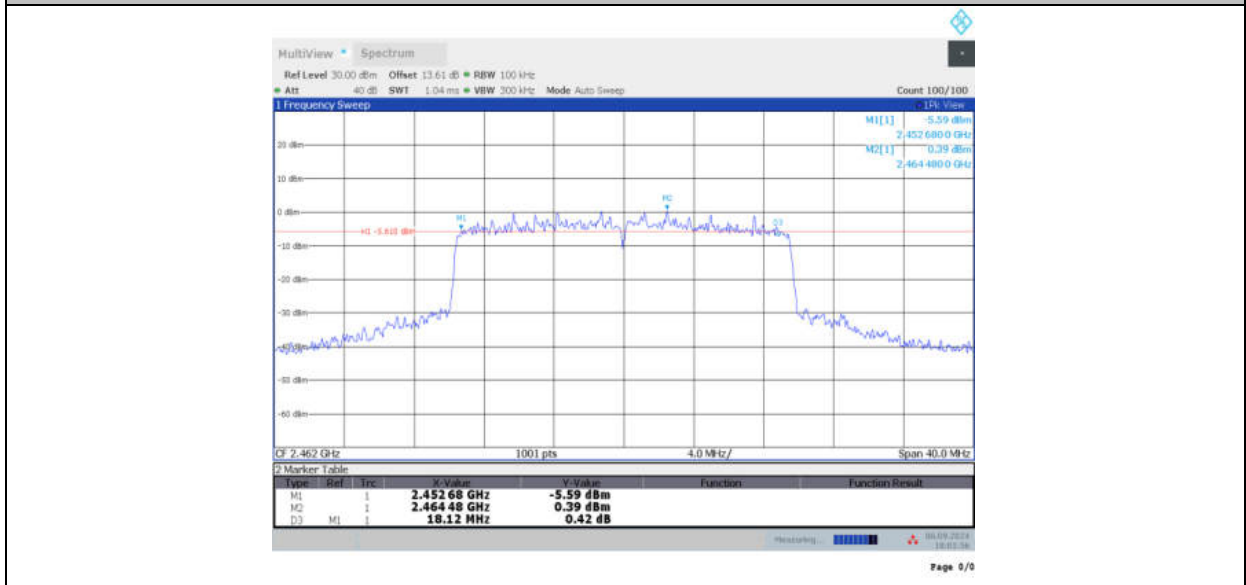

11AX20MIMO\_Ant7\_2462

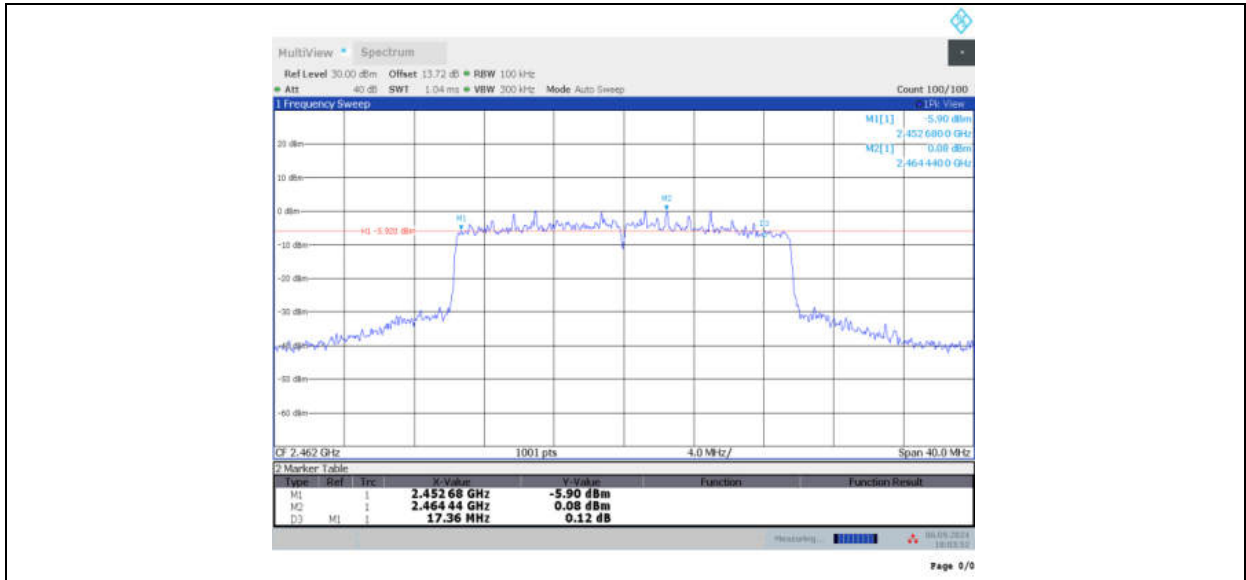


11BE20MIMO\_Ant1\_2412

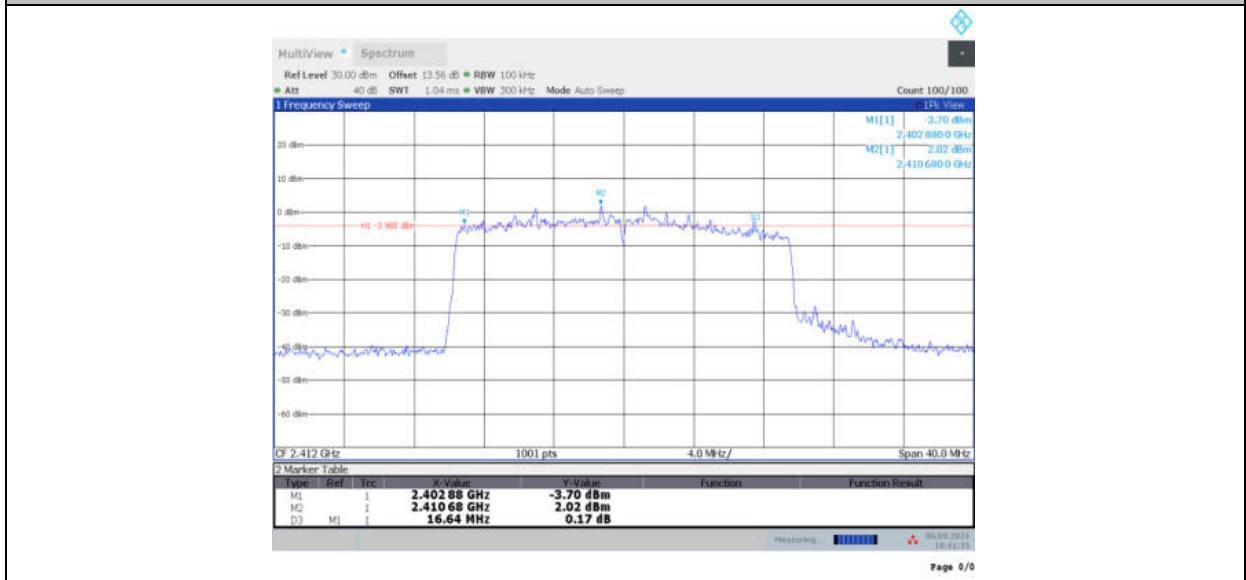


11BE20MIMO\_Ant2\_2412




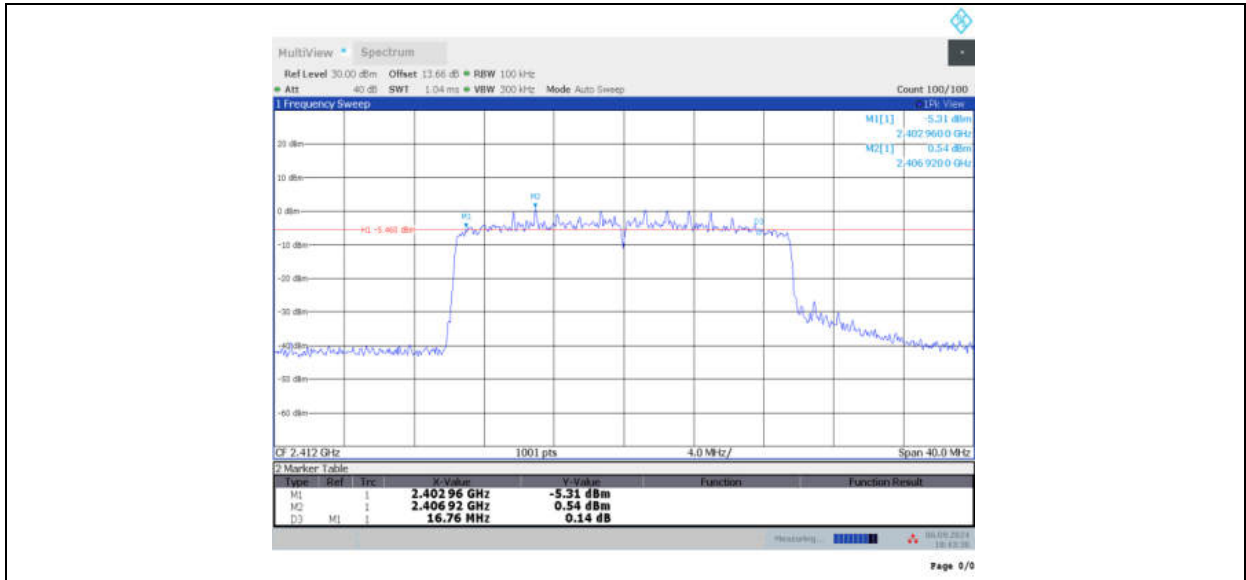


11BE20MIMO\_Ant1\_2437

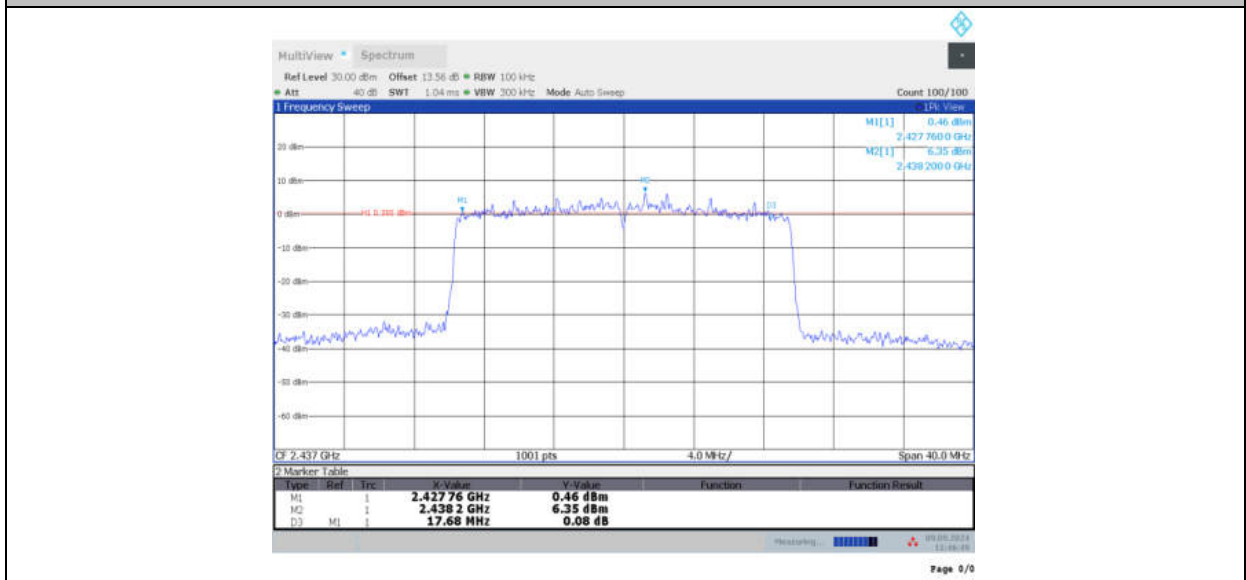


11BE20MIMO\_Ant2\_2437

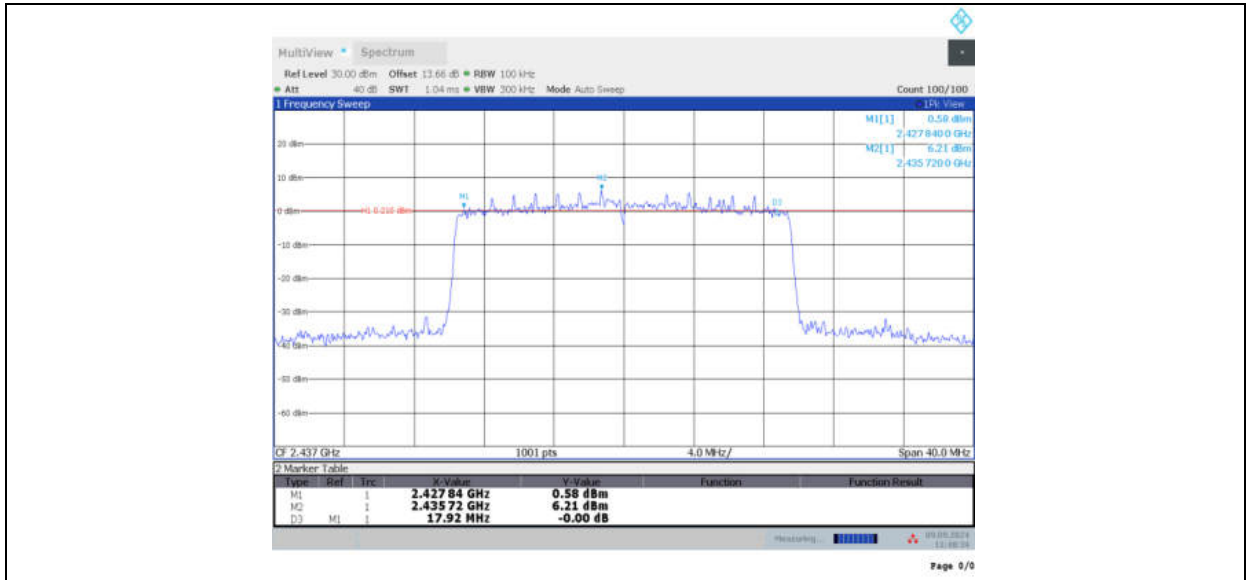

11BE20MIMO\_Ant1\_2462

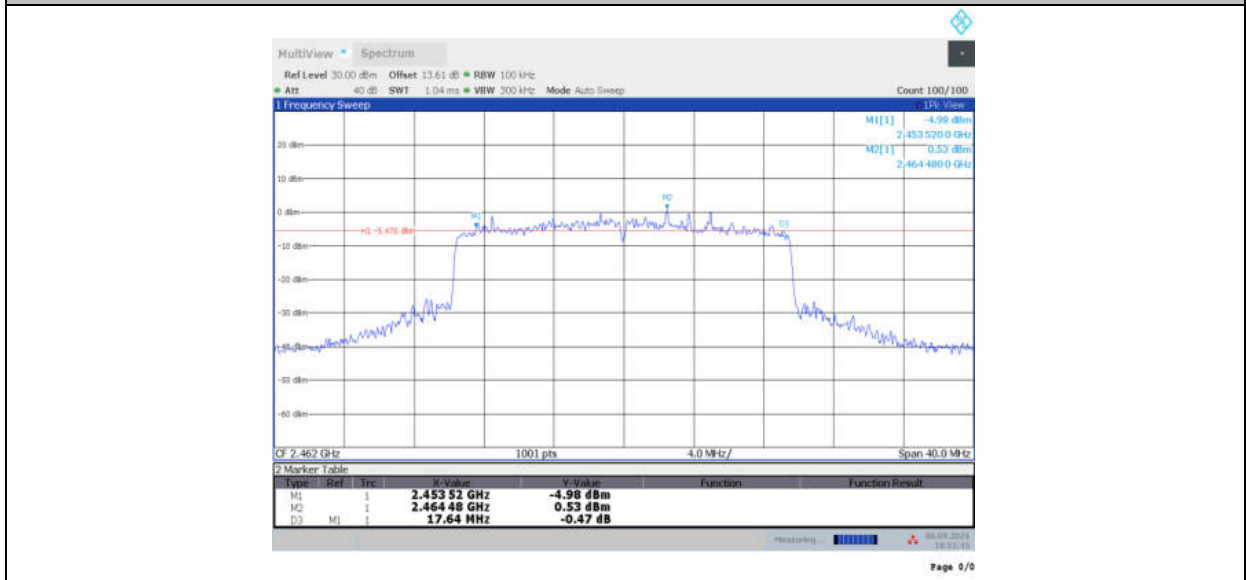

11BE20MIMO\_Ant2\_2462

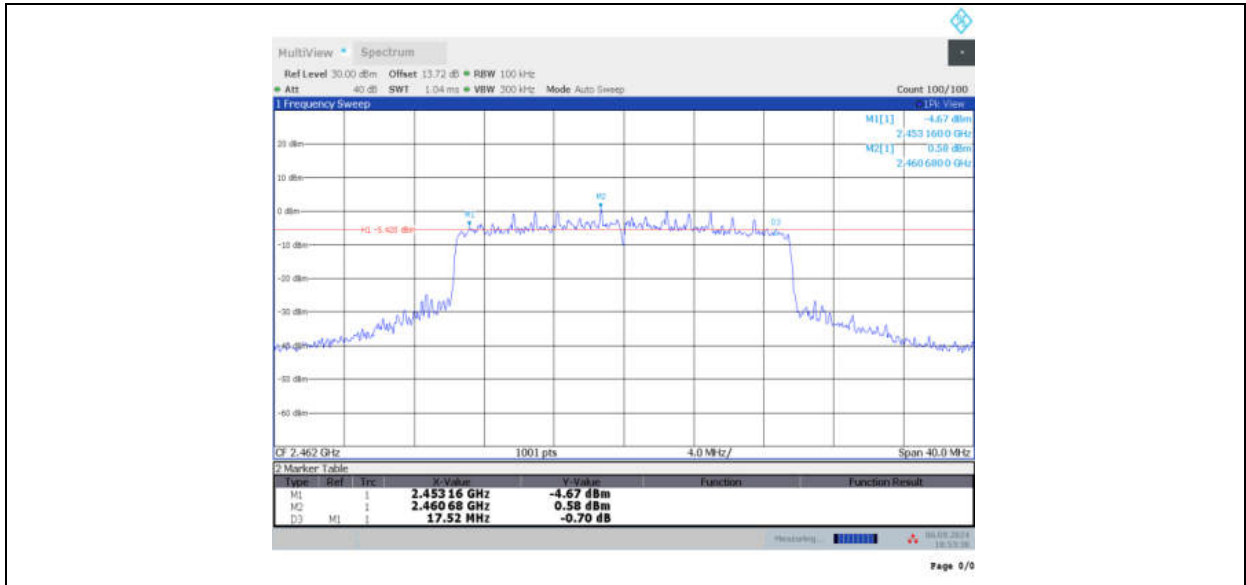

**Conclusion: Pass**

## A.5. Band Edges Compliance

### Method of Measurement: See ANSI C63.10-2013-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

### Measurement Limit:


Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

### EUT ID: UT02a


### Measurement Result:

TestMode	Antenna	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B-CDD	Ant12	2412	10.12	-39.38	≤-9.88	PASS
	Ant7	2412	9.48	-40.03	≤-10.52	PASS
	Ant12	2462	10.02	-47.74	≤-9.98	PASS
	Ant7	2462	9.37	-45.82	≤-10.63	PASS
11G-CDD	Ant12	2412	2.25	-46.25	≤-17.75	PASS
	Ant7	2412	1.38	-47.33	≤-18.62	PASS
	Ant12	2462	1.27	-47.69	≤-18.73	PASS
	Ant7	2462	0.98	-47.27	≤-19.02	PASS
11N20MIMO	Ant12	2412	2.46	-45.28	≤-17.54	PASS
	Ant7	2412	1.23	-46.97	≤-18.77	PASS
	Ant12	2462	1.28	-47.45	≤-18.72	PASS
	Ant7	2462	0.69	-46.81	≤-19.31	PASS
11AC20MIM O	Ant12	2412	2.12	-45.03	≤-17.88	PASS
	Ant7	2412	1.44	-46.38	≤-18.56	PASS
	Ant12	2462	1.35	-47.31	≤-18.65	PASS
	Ant7	2462	0.86	-47.09	≤-19.14	PASS
11AX20MIM O	Ant12	2412	2.49	-45.18	≤-17.51	PASS
	Ant7	2412	1.10	-45.94	≤-18.9	PASS
	Ant12	2462	1.42	-46.1	≤-18.58	PASS
	Ant7	2462	0.97	-47.23	≤-19.03	PASS
11BE20MIM O	Ant1	2412	2.53	-44.87	≤-17.47	PASS
	Ant2	2412	1.47	-45.83	≤-18.53	PASS
	Ant1	2462	1.41	-47.8	≤-18.59	PASS
	Ant2	2462	0.84	-47.61	≤-19.16	PASS


## 11B-CDD\_Ant12\_Low\_2412

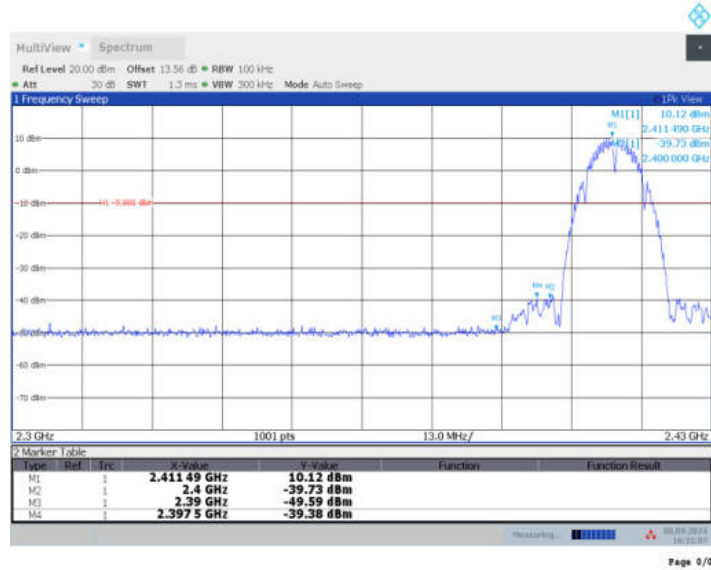


## 11B-CDD\_Ant7\_Low\_2412

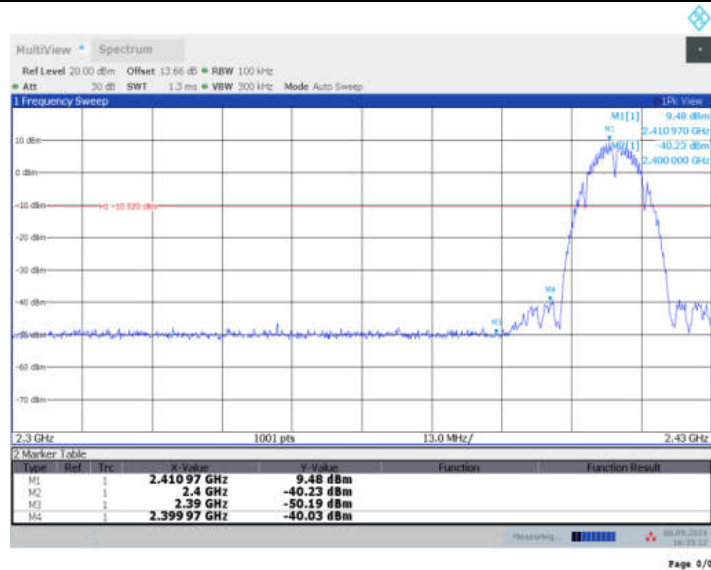

## 11B-CDD\_Ant12\_High\_2462

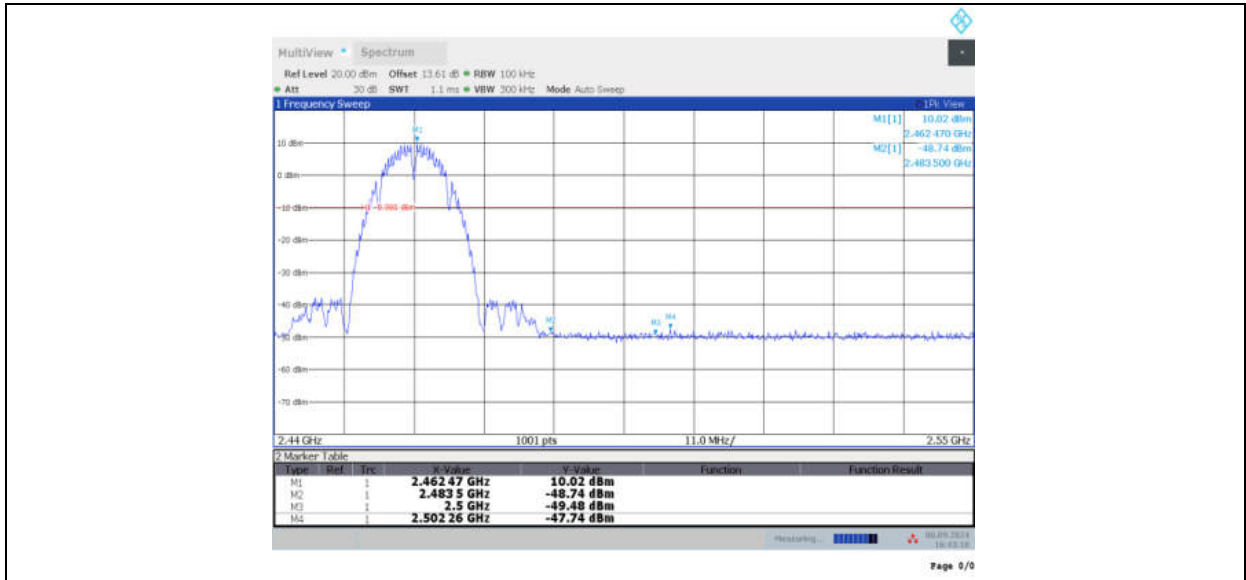


11B-CDD\_Ant7\_High\_2462

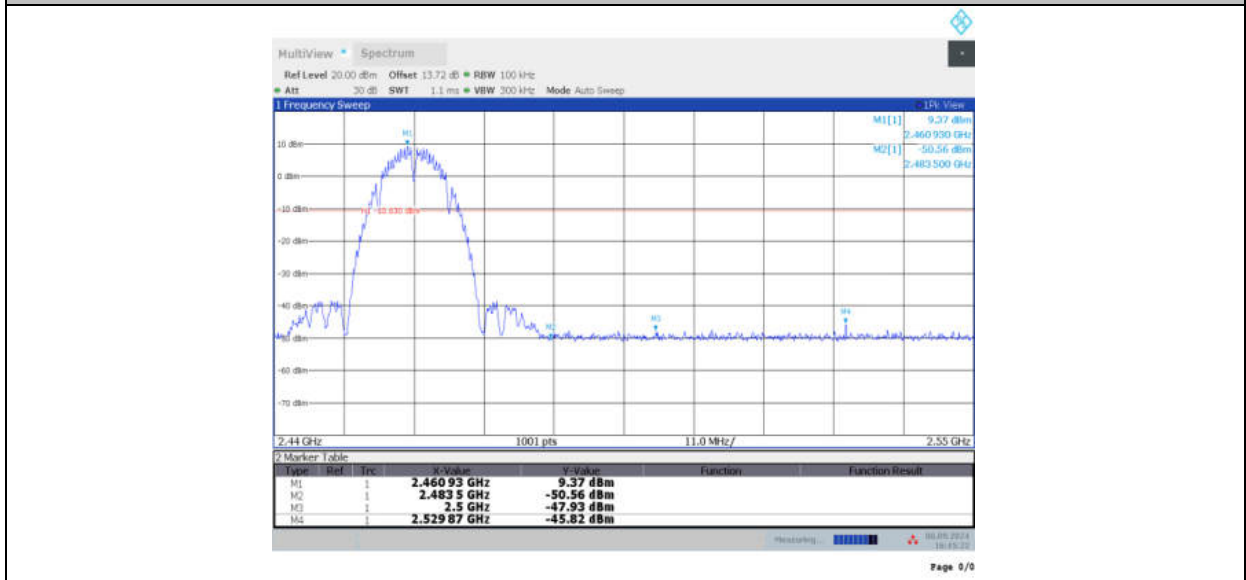


11G-CDD\_Ant12\_Low\_2412




11G-CDD\_Ant7\_Low\_2412

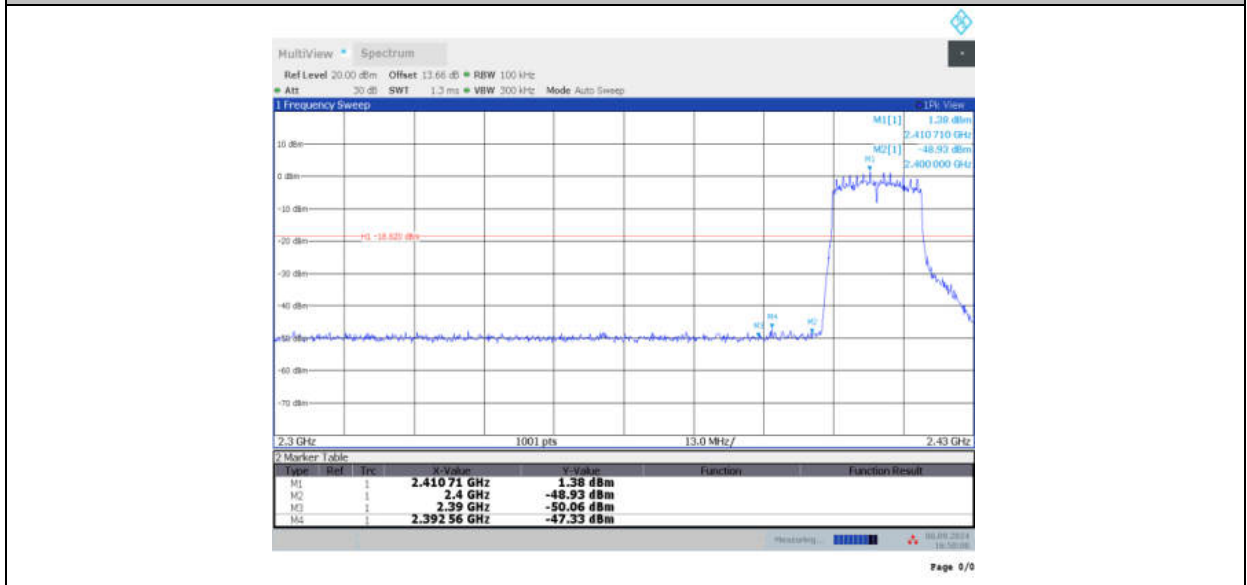

11G-CDD\_Ant12\_High\_2462

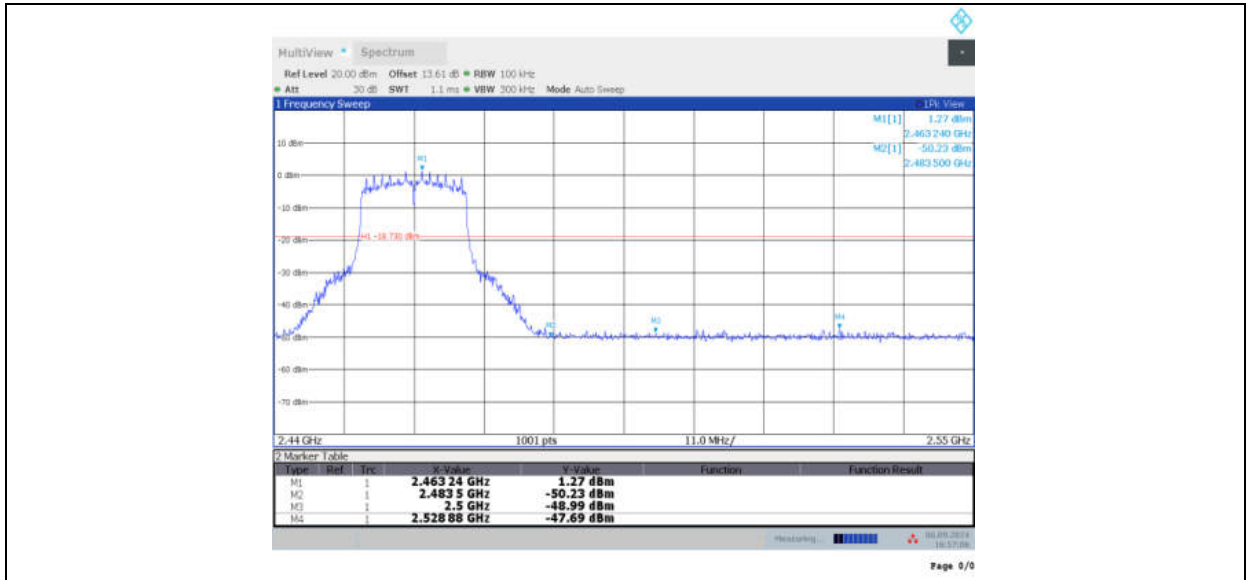

11G-CDD\_Ant7\_High\_2462

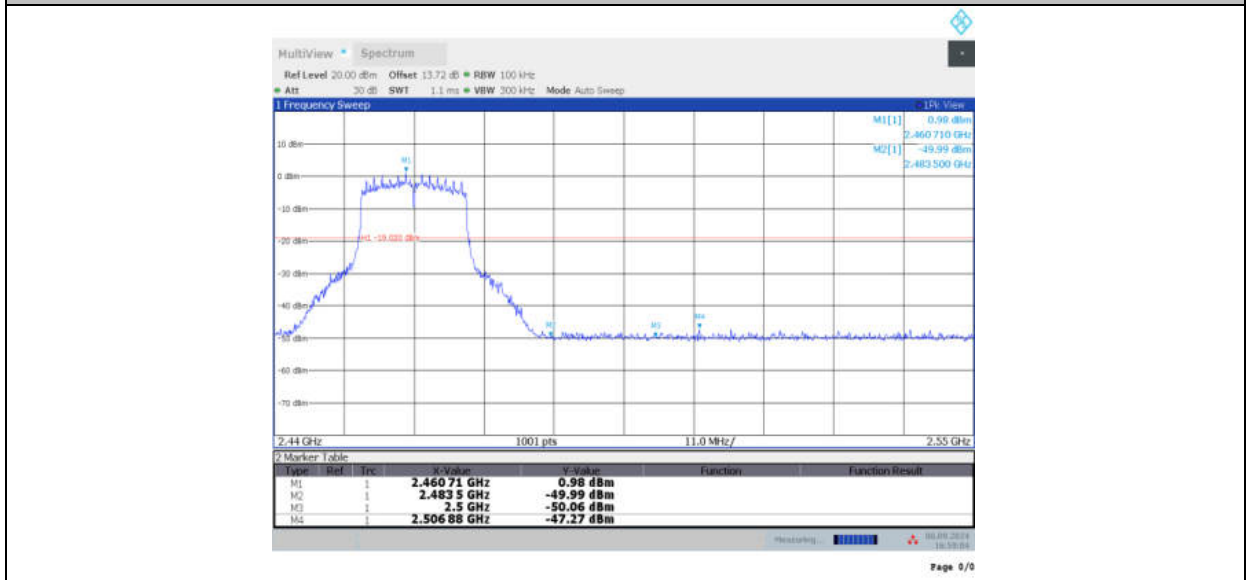


11N20MIMO\_Ant12\_Low\_2412







11N20MIMO\_Ant7\_Low\_2412

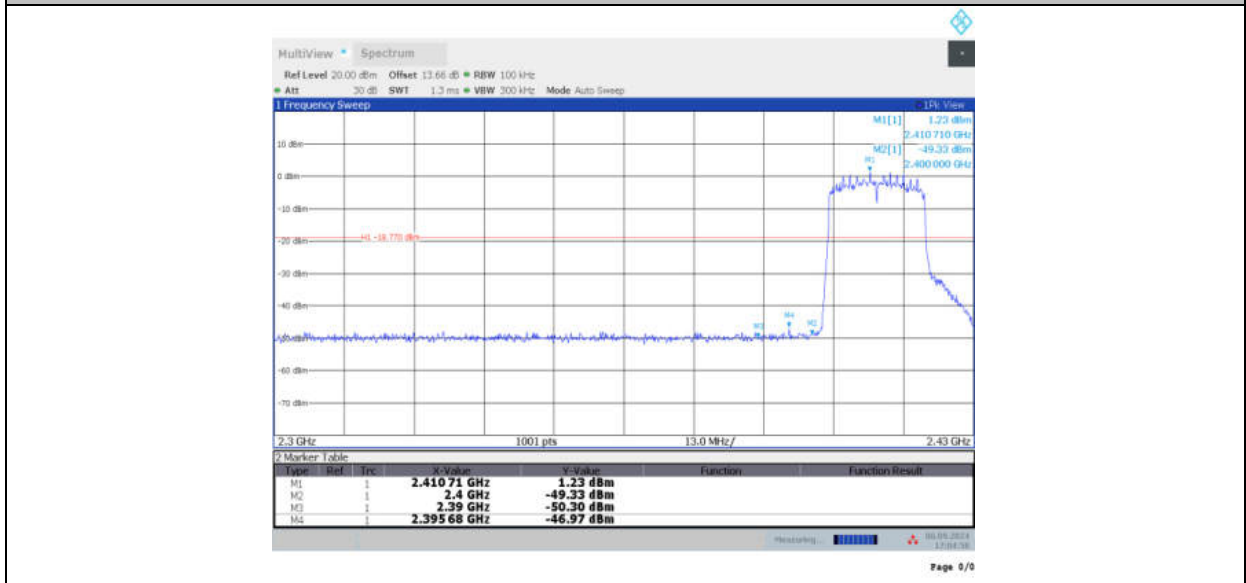

11N20MIMO\_Ant12\_High\_2462

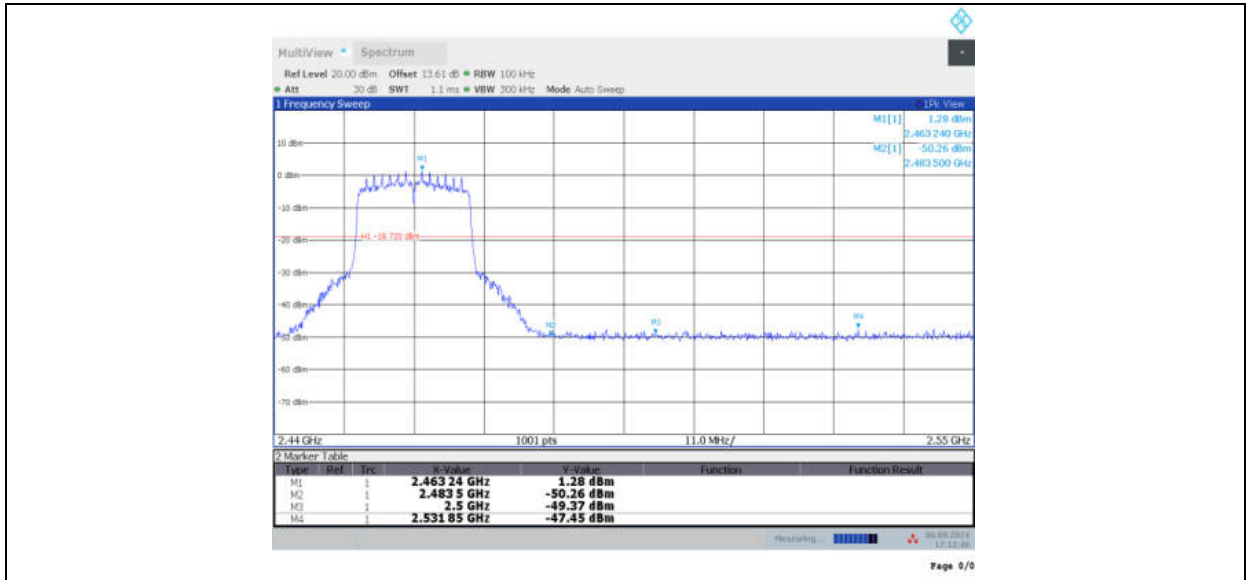


11N20MIMO\_Ant7\_High\_2462

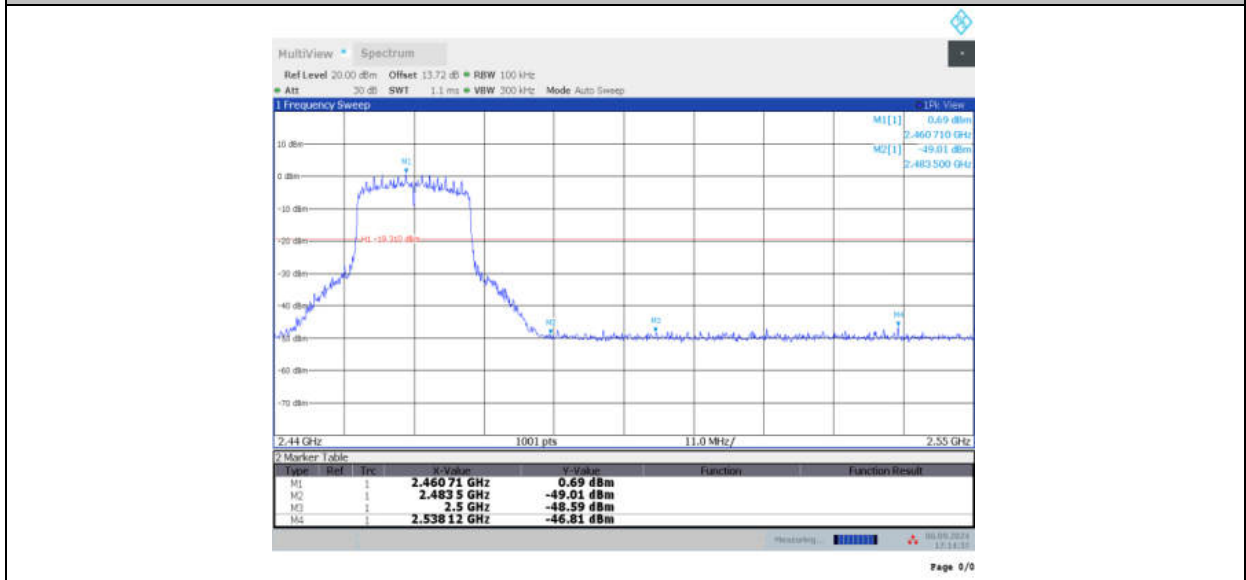


11AC20MIMO\_Ant12\_Low\_2412




11AC20MIMO\_Ant7\_Low\_2412

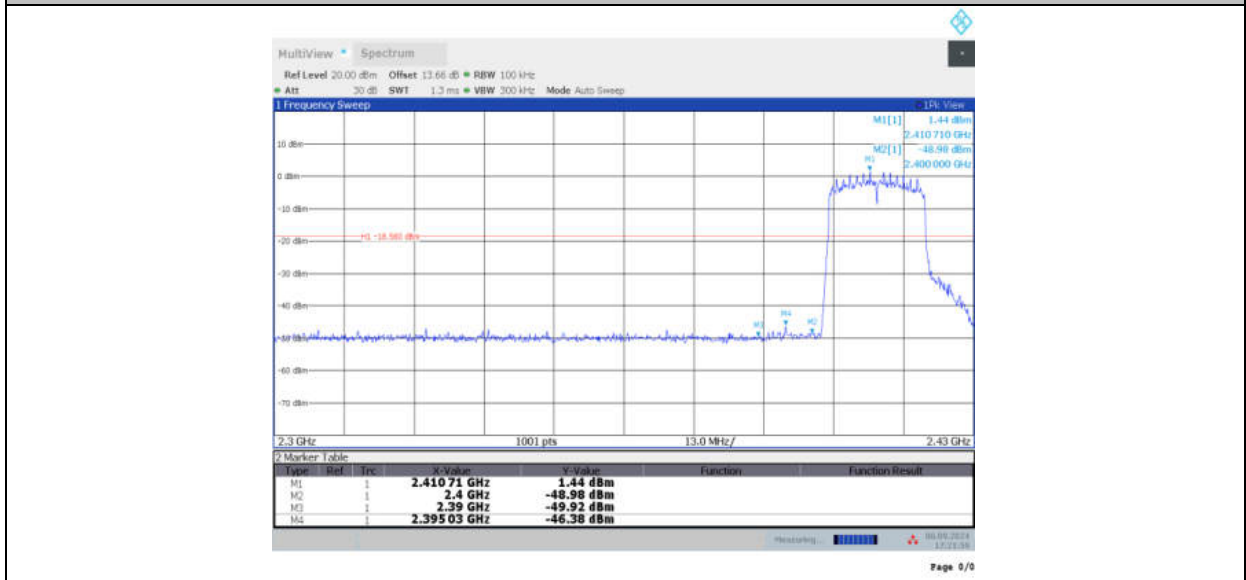


11AC20MIMO\_Ant12\_High\_2462

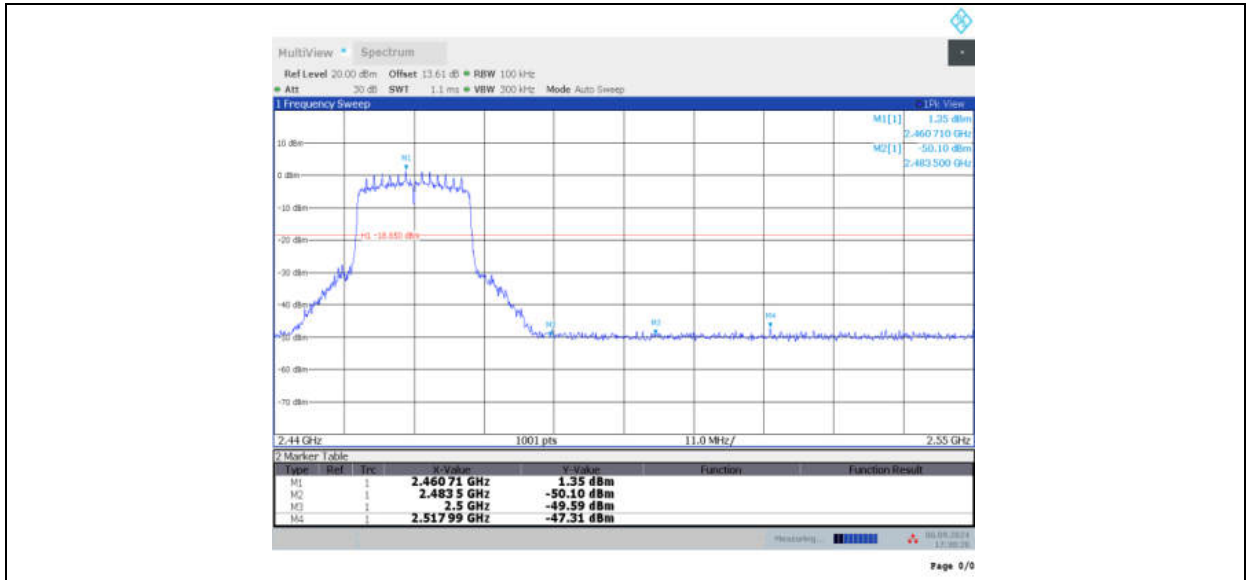


11AC20MIMO\_Ant7\_High\_2462

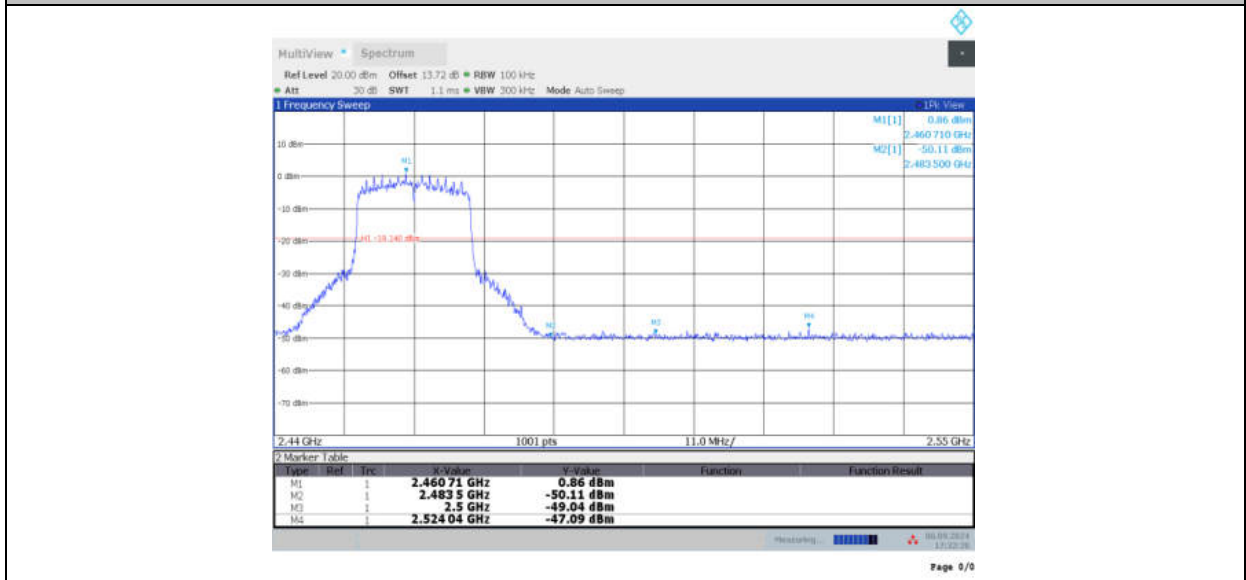


11AX20MIMO\_Ant12\_Low\_2412

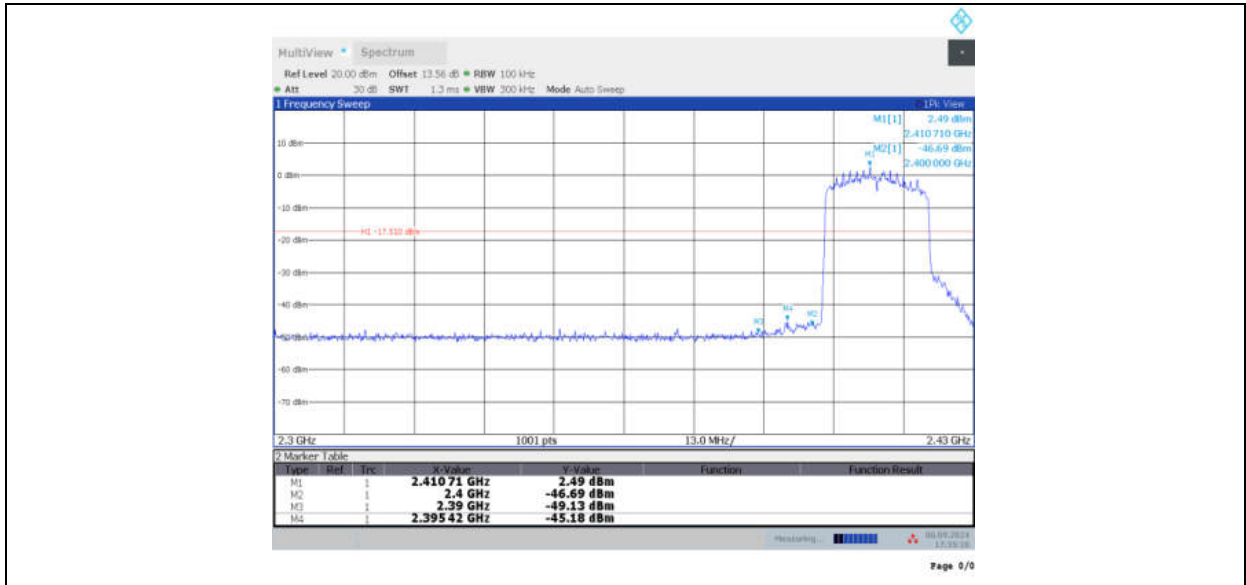


11AX20MIMO\_Ant7\_Low\_2412

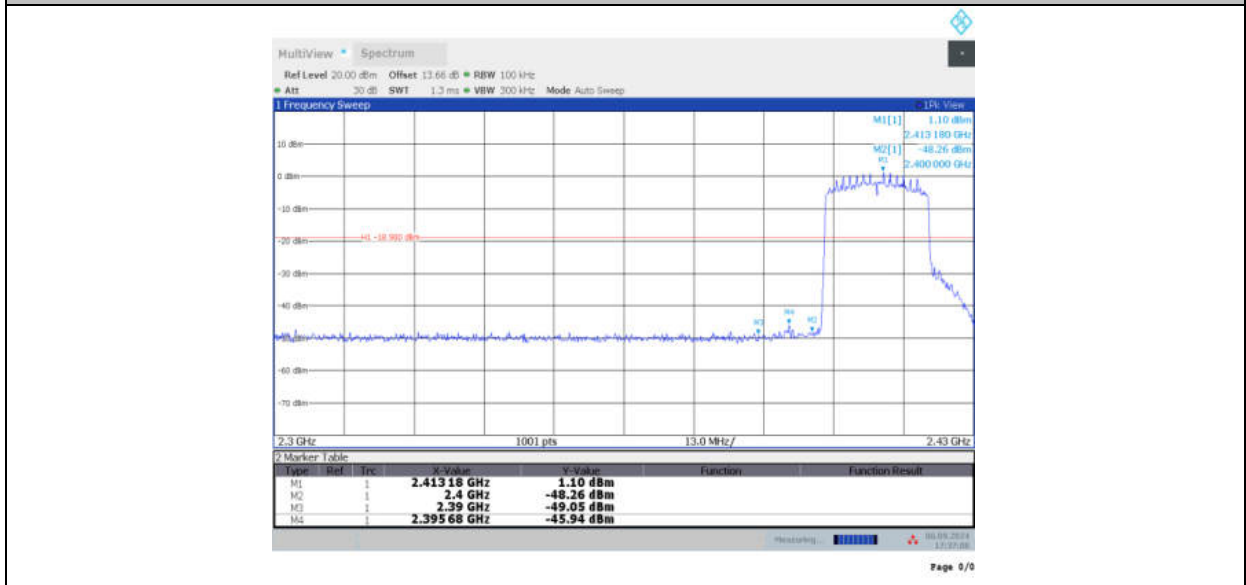

11AX20MIMO\_Ant12\_High\_2462

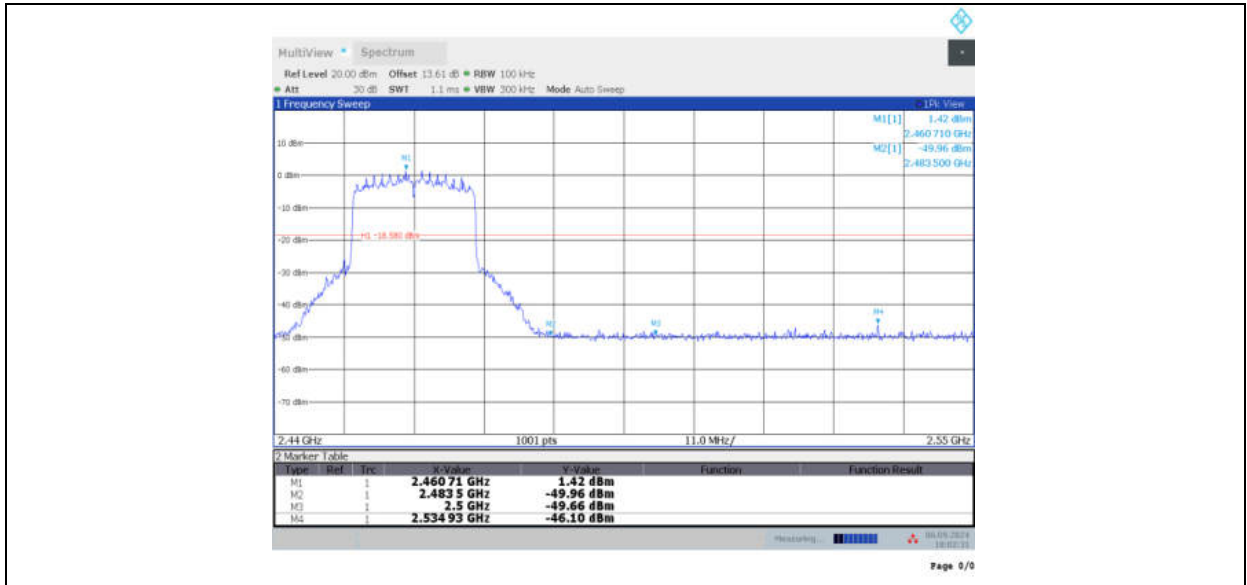

11AX20MIMO\_Ant7\_High\_2462

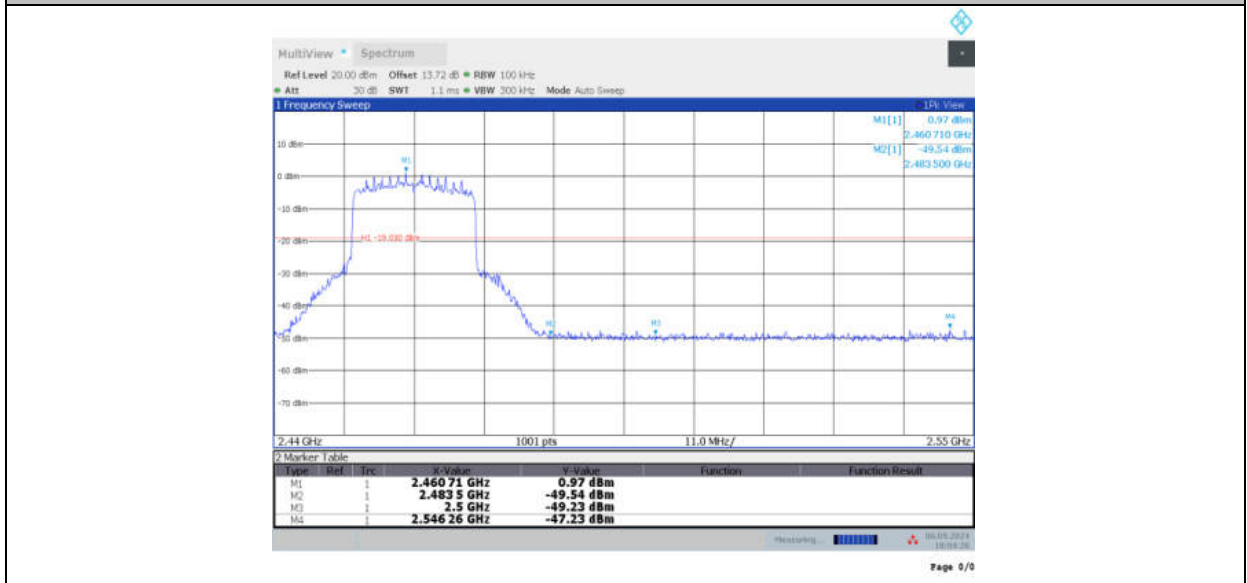


**RU Mode**


TestMode	Antenna	Frequency[MHz]	Ru Size	Ru Index	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11AX20MIMO	Ant12	2412	26Tone	RU0	-0.27	-47.76	≤-30.27	PASS
				RU8	-1.08	-47	≤-31.08	PASS
			52Tone	RU37	-2.41	-47.54	≤-32.41	PASS
				RU40	-2.59	-47.75	≤-32.59	PASS
			106Tone	RU53	-0.07	-45.17	≤-30.07	PASS
				RU54	-1.00	-45.96	≤-31	PASS
	Ant7	2412	26Tone	RU0	-0.18	-46.67	≤-30.18	PASS
				RU8	-0.05	-47.21	≤-30.05	PASS
			52Tone	RU37	-0.68	-47.69	≤-30.68	PASS
				RU40	-0.72	-47.59	≤-30.72	PASS
			106Tone	RU53	-0.87	-40.23	≤-30.87	PASS
				RU54	-1.32	-47.23	≤-31.32	PASS
	Ant12	2462	26Tone	RU0	-0.07	-47.68	≤-30.07	PASS
				RU8	-0.96	-47.51	≤-30.96	PASS
			52Tone	RU37	-1.22	-47.67	≤-31.22	PASS
				RU40	-2.65	-47.11	≤-32.65	PASS
			106Tone	RU53	-0.51	-47.4	≤-30.51	PASS
				RU54	-1.12	-47.45	≤-31.12	PASS
	Ant7	2462	26Tone	RU0	-1.53	-47.1	≤-31.53	PASS
				RU8	-1.07	-47.58	≤-31.07	PASS
			52Tone	RU37	-1.32	-47.31	≤-31.32	PASS
				RU40	-1.43	-46.7	≤-31.43	PASS
			106Tone	RU53	-0.37	-47.35	≤-30.37	PASS
				RU54	-1.54	-48	≤-31.54	PASS
11BE20MIMO	Ant12	2412	26Tone	RU0	-0.50	-47.43	≤-30.5	PASS
				RU8	-1.83	-47.49	≤-31.83	PASS
			52Tone	RU37	-2.05	-47.33	≤-32.05	PASS
				RU40	-2.37	-47.82	≤-32.37	PASS
			106Tone	RU53	0.32	-45.42	≤-29.68	PASS
				RU54	-0.90	-44.8	≤-30.9	PASS
	Ant7	2412	26Tone	RU0	-1.18	-47.86	≤-31.18	PASS
				RU8	-1.20	-48.04	≤-31.2	PASS
			52Tone	RU37	-1.02	-47.45	≤-31.02	PASS
				RU40	-0.49	-47.82	≤-30.49	PASS
			106Tone	RU53	-0.61	-41.46	≤-30.61	PASS
				RU54	-1.86	-45.79	≤-31.86	PASS
	Ant12	2462	26Tone	RU0	-0.61	-47.84	≤-30.61	PASS
				RU8	-0.88	-46.87	≤-30.88	PASS
			52Tone	RU37	-2.34	-47.66	≤-32.34	PASS

			106Tone	RU40	-2.53	-48.17	$\leq -32.53$	PASS
				RU53	-0.81	-47.18	$\leq -30.81$	PASS
				RU54	-1.31	-47.73	$\leq -31.31$	PASS
	Ant7	2462	26Tone	RU0	-1.04	-47.22	$\leq -31.04$	PASS
				RU8	-0.92	-47.12	$\leq -30.92$	PASS
			52Tone	RU37	-1.36	-46.85	$\leq -31.36$	PASS
				RU40	-2.01	-47.1	$\leq -32.01$	PASS
			106Tone	RU53	-0.98	-46.74	$\leq -30.98$	PASS
				RU54	-1.50	-47.43	$\leq -31.5$	PASS

11AX20MIMO\_Ant12\_Low\_2412\_26Tone\_RU0

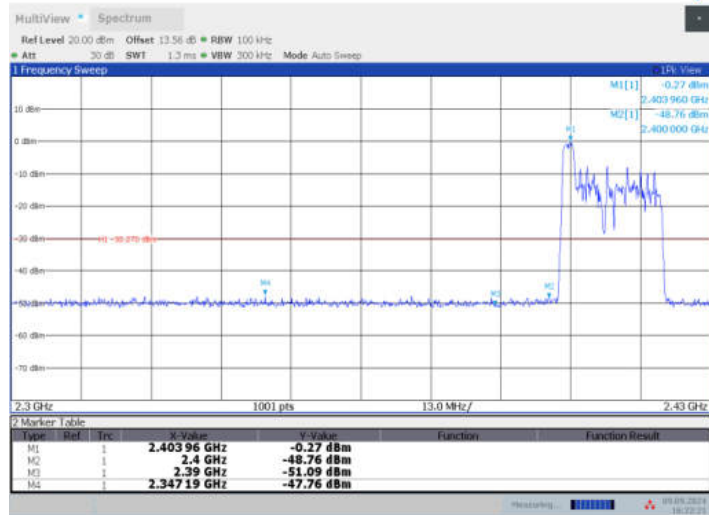


11AX20MIMO\_Ant12\_Low\_2412\_26Tone\_RU8

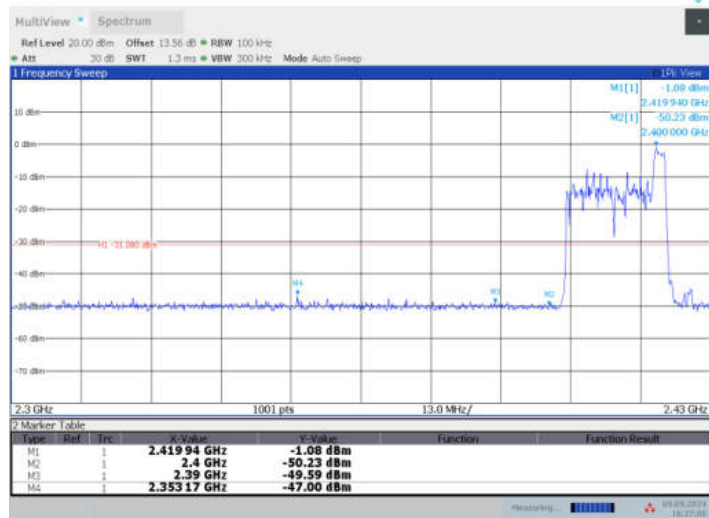


11AX20MIMO\_Ant12\_Low\_2412\_52Tone\_RU37




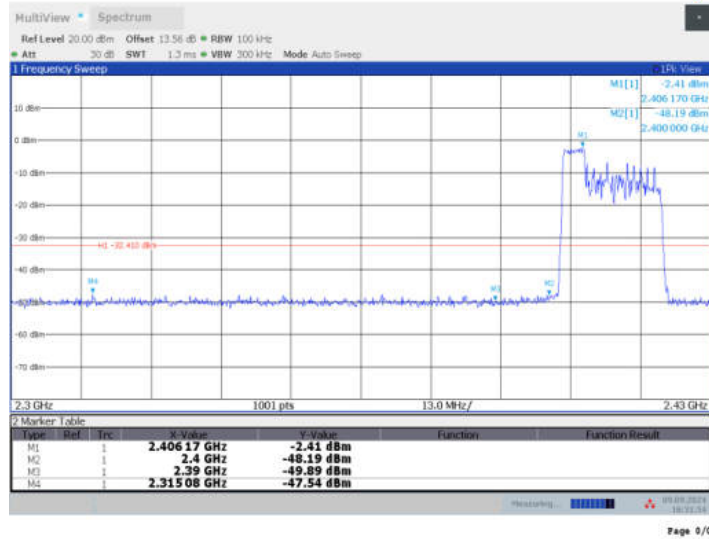


11AX20MIMO\_Ant12\_Low\_2412\_52Tone\_RU40

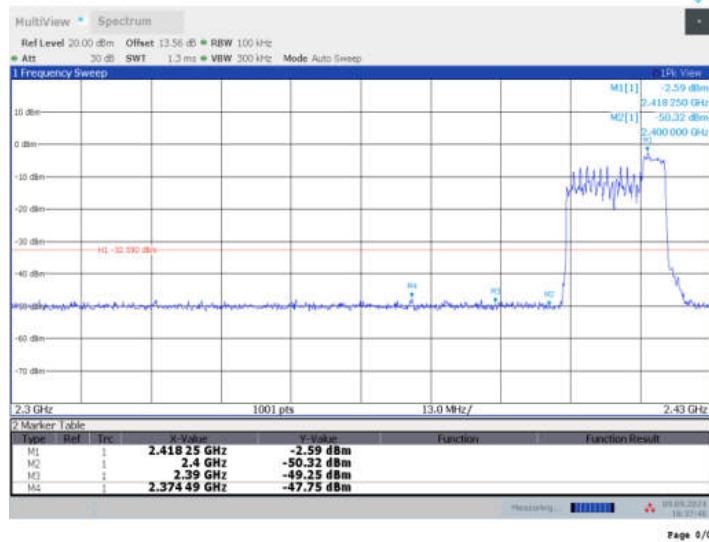


11AX20MIMO\_Ant12\_Low\_2412\_106Tone\_RU53

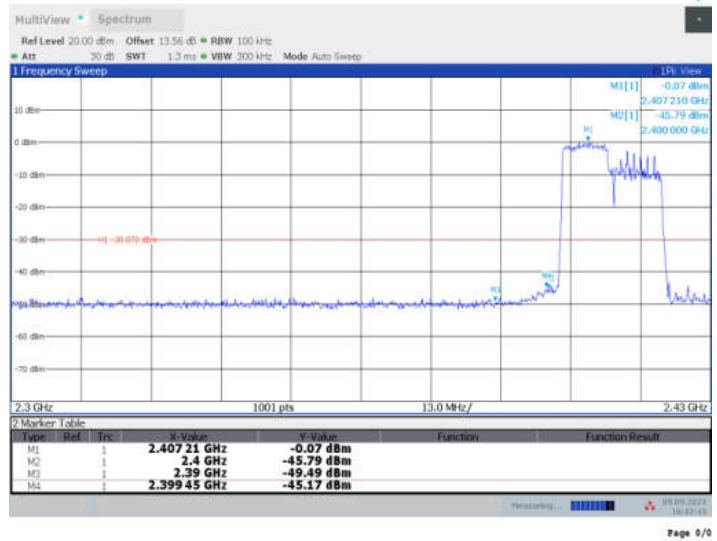

11AX20MIMO\_Ant12\_Low\_2412\_106Tone\_RU54

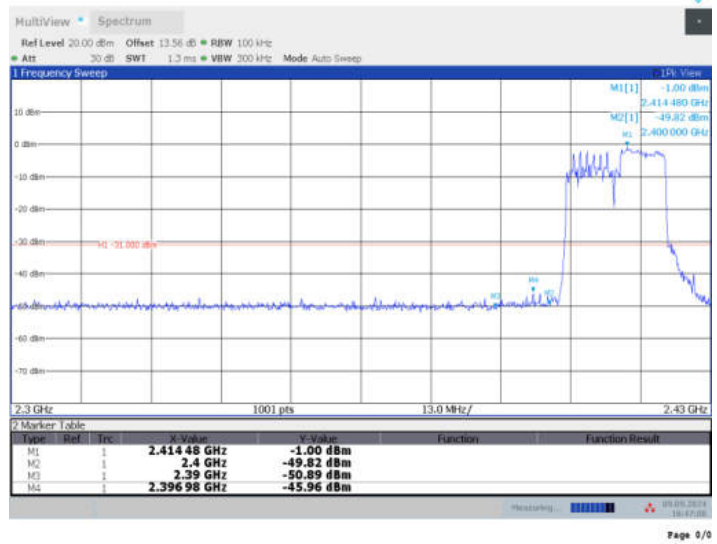


11AX20MIMO\_Ant7\_Low\_2412\_26Tone\_RU0

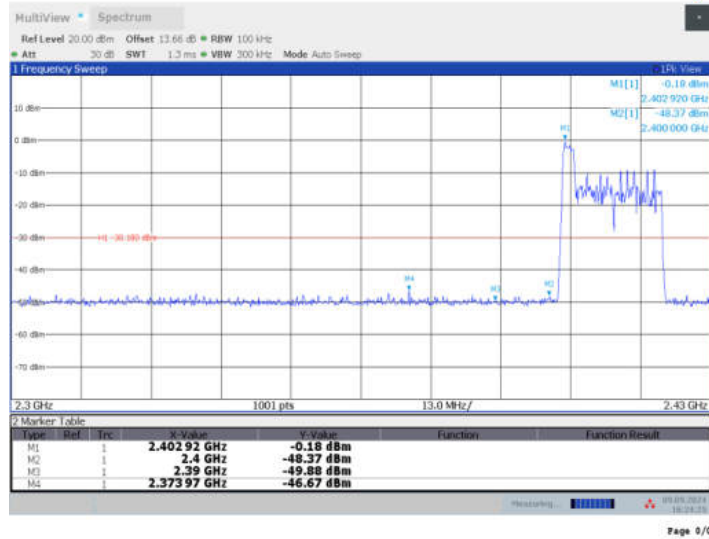


11AX20MIMO\_Ant7\_Low\_2412\_26Tone\_RU8




11AX20MIMO\_Ant7\_Low\_2412\_52Tone\_RU37

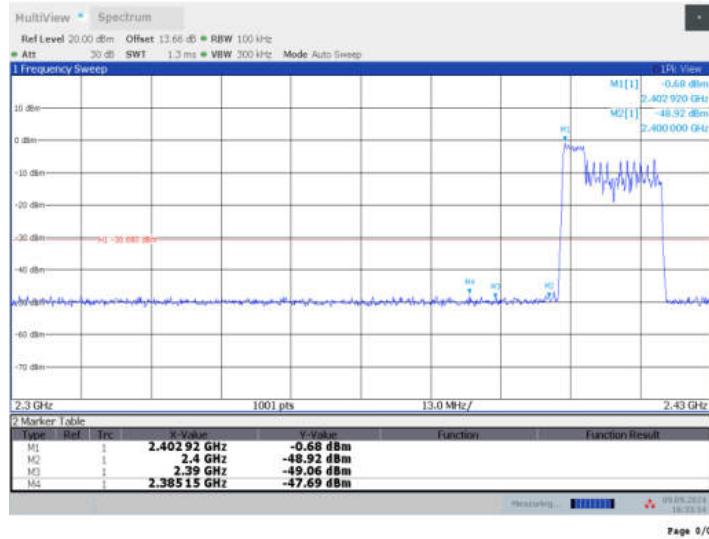


11AX20MIMO\_Ant7\_Low\_2412\_52Tone\_RU40

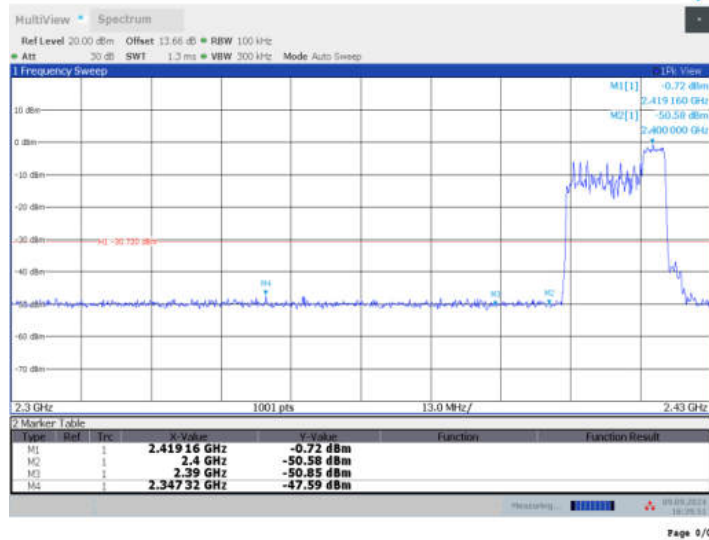


11AX20MIMO\_Ant7\_Low\_2412\_106Tone\_RU53

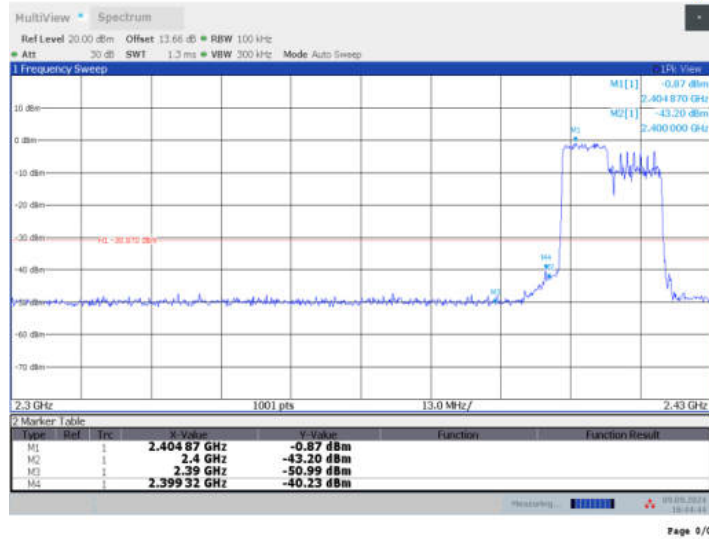


11AX20MIMO\_Ant7\_Low\_2412\_106Tone\_RU54

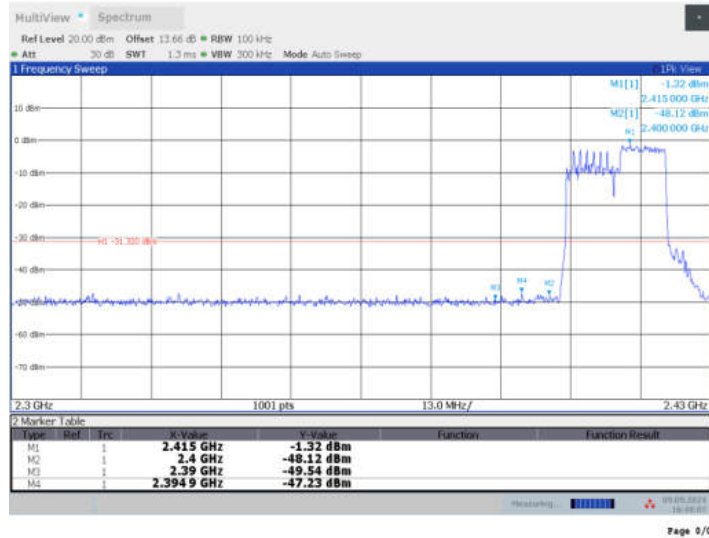


11AX20MIMO\_Ant12\_High\_2462\_26Tone\_RU0

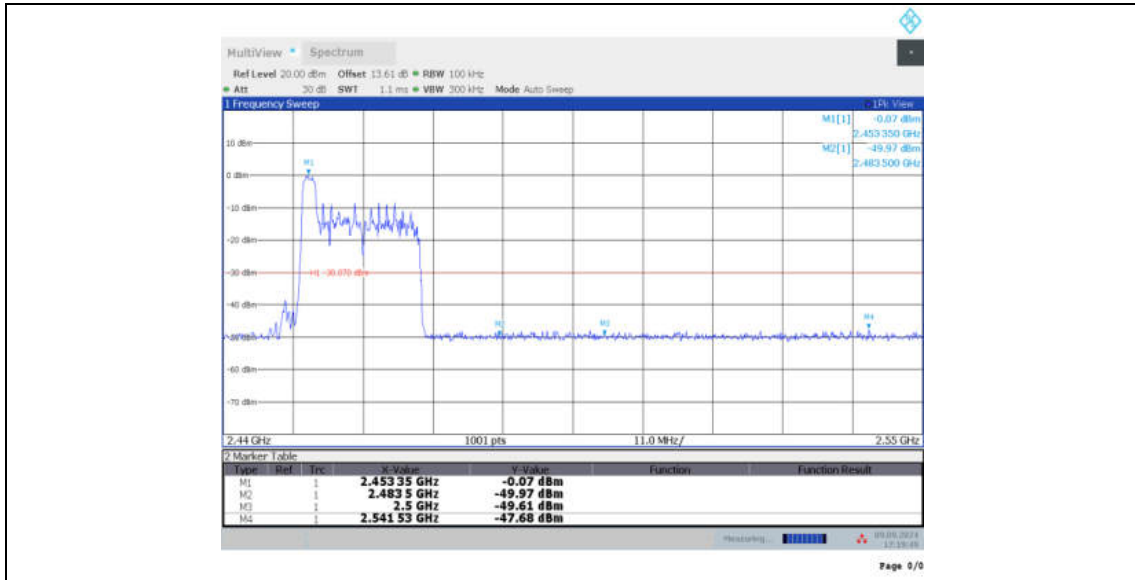


11AX20MIMO\_Ant12\_High\_2462\_26Tone\_RU8

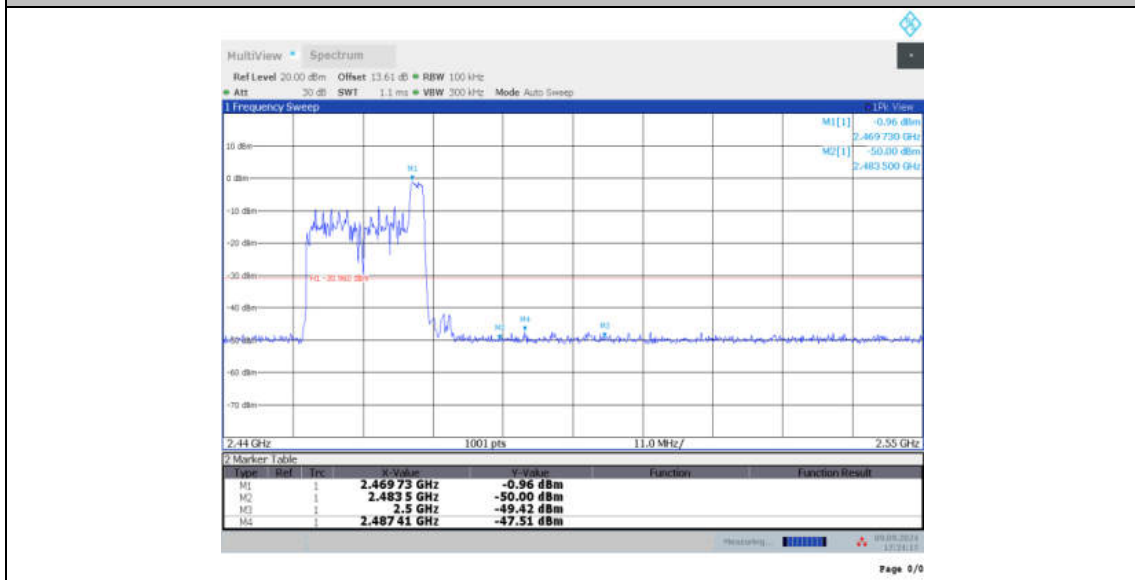


11AX20MIMO\_Ant12\_High\_2462\_52Tone\_RU37

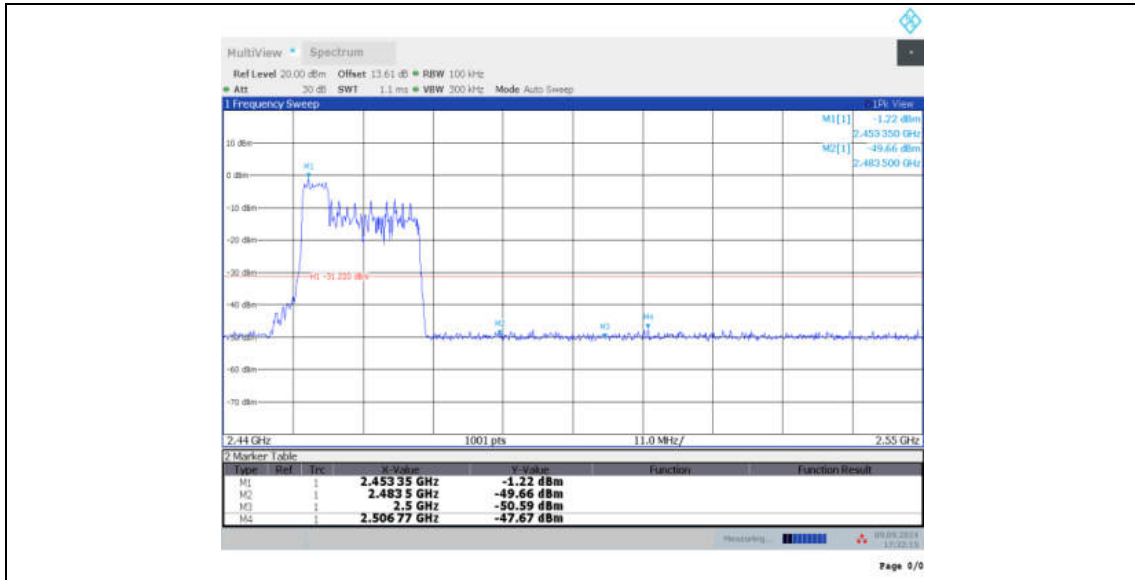


11AX20MIMO\_Ant12\_High\_2462\_52Tone\_RU40

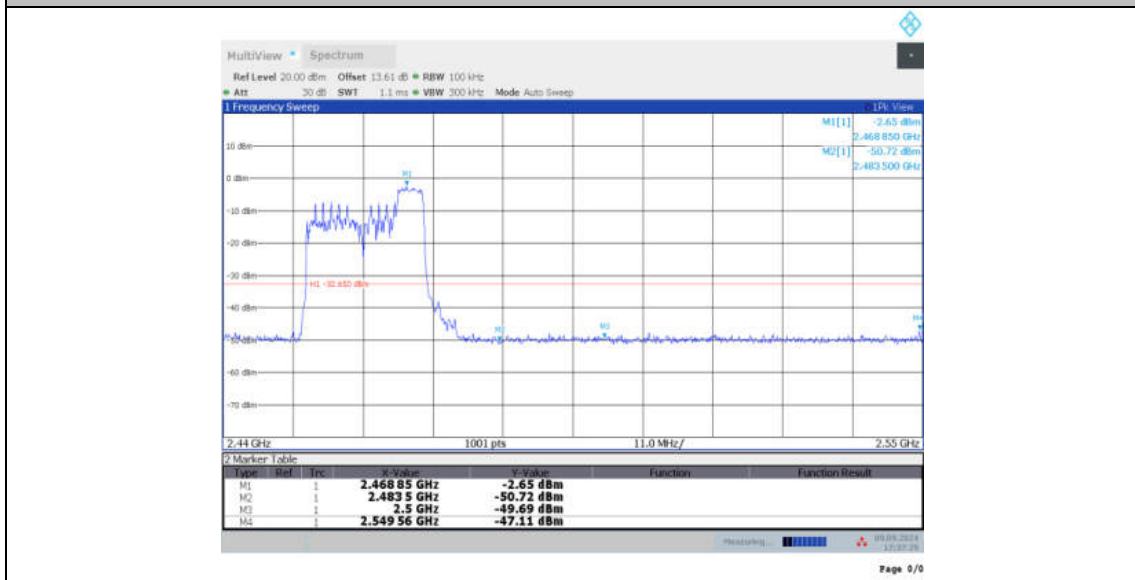

11AX20MIMO\_Ant12\_High\_2462\_106Tone\_RU53

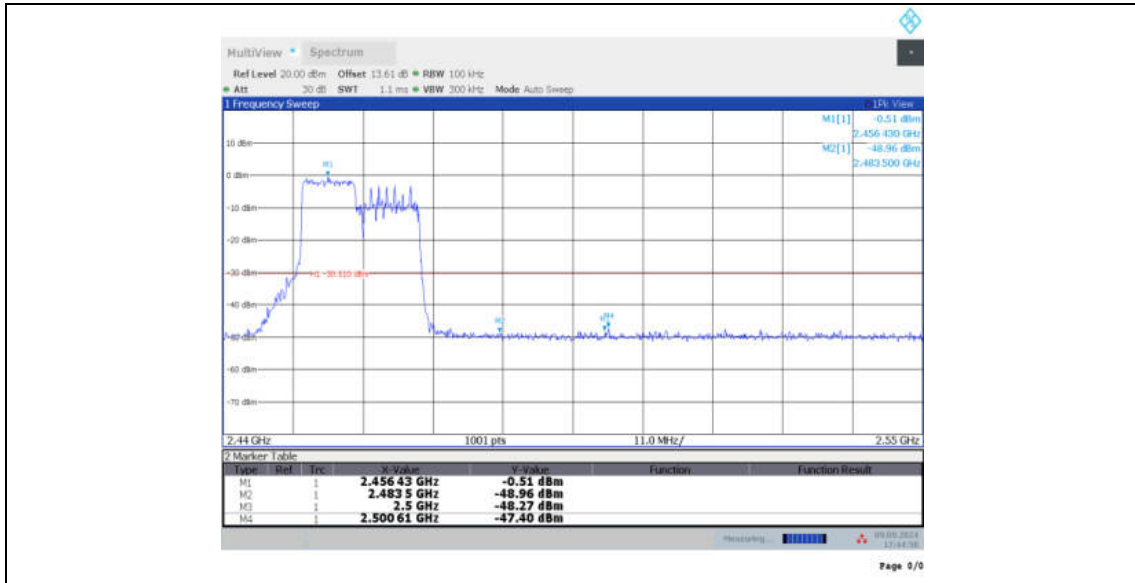


11AX20MIMO\_Ant12\_High\_2462\_106Tone\_RU54

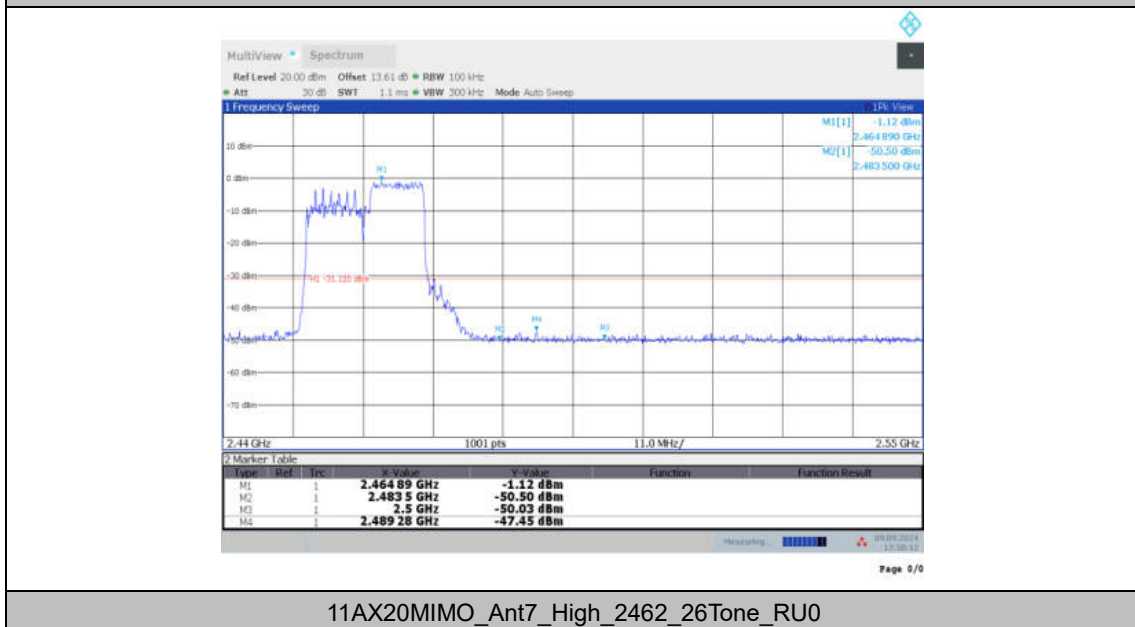


11AX20MIMO\_Ant7\_High\_2462\_26Tone\_RU0




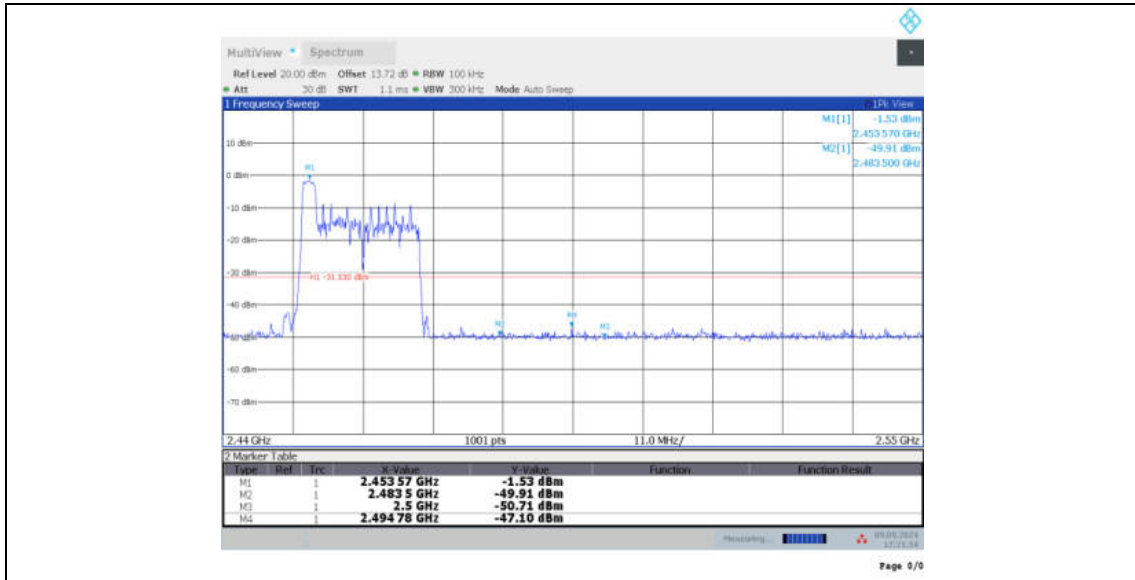


11AX20MIMO\_Ant7\_High\_2462\_26Tone\_RU8

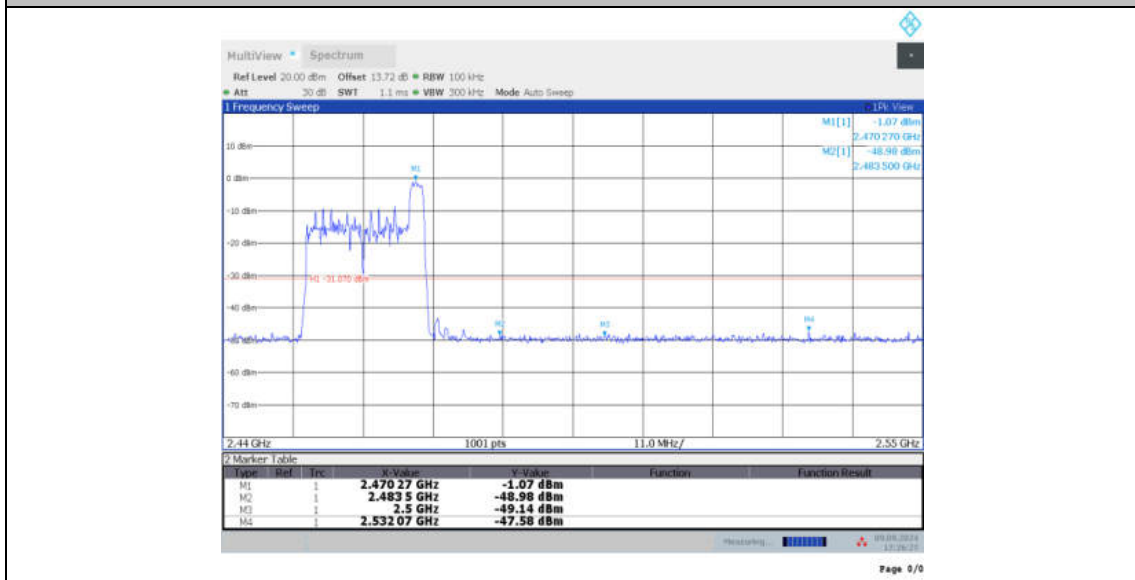


11AX20MIMO\_Ant7\_High\_2462\_52Tone\_RU37

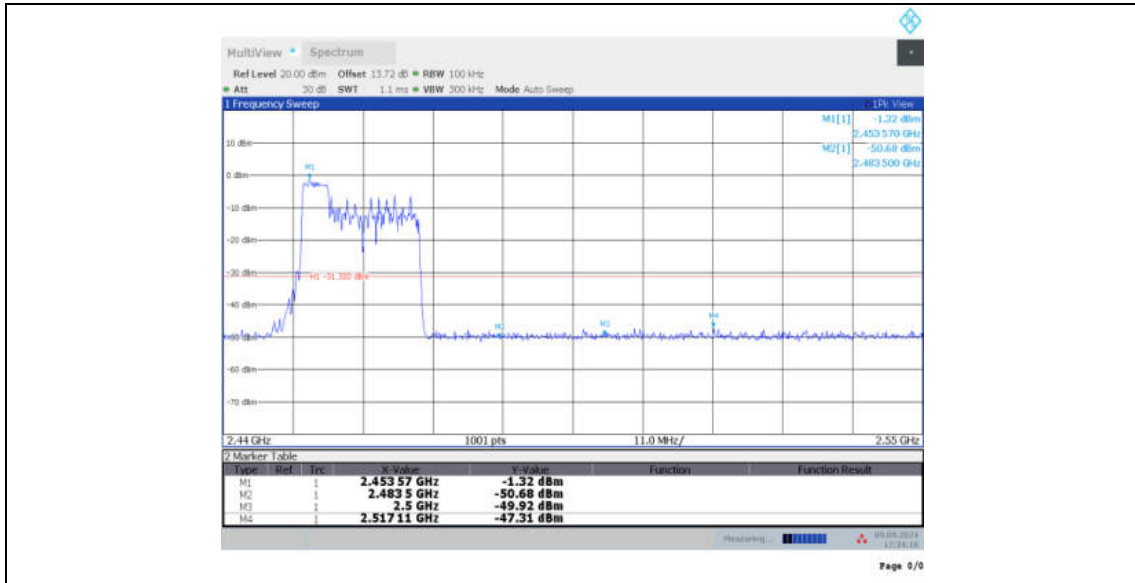


11AX20MIMO\_Ant7\_High\_2462\_52Tone\_RU40

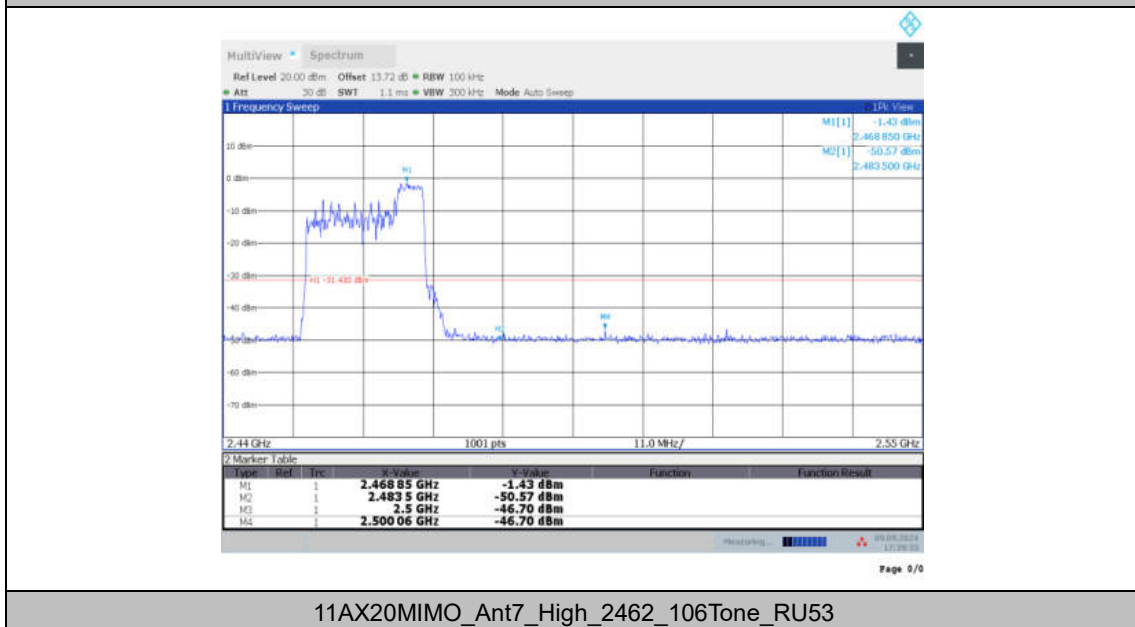


11AX20MIMO\_Ant7\_High\_2462\_106Tone\_RU53

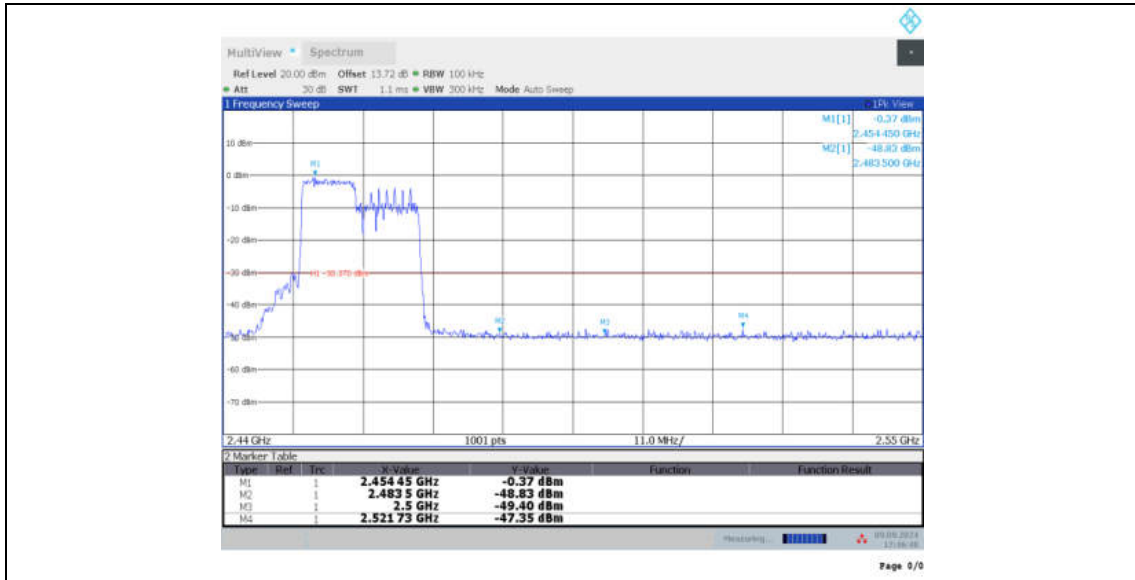

11AX20MIMO\_Ant7\_High\_2462\_106Tone\_RU54

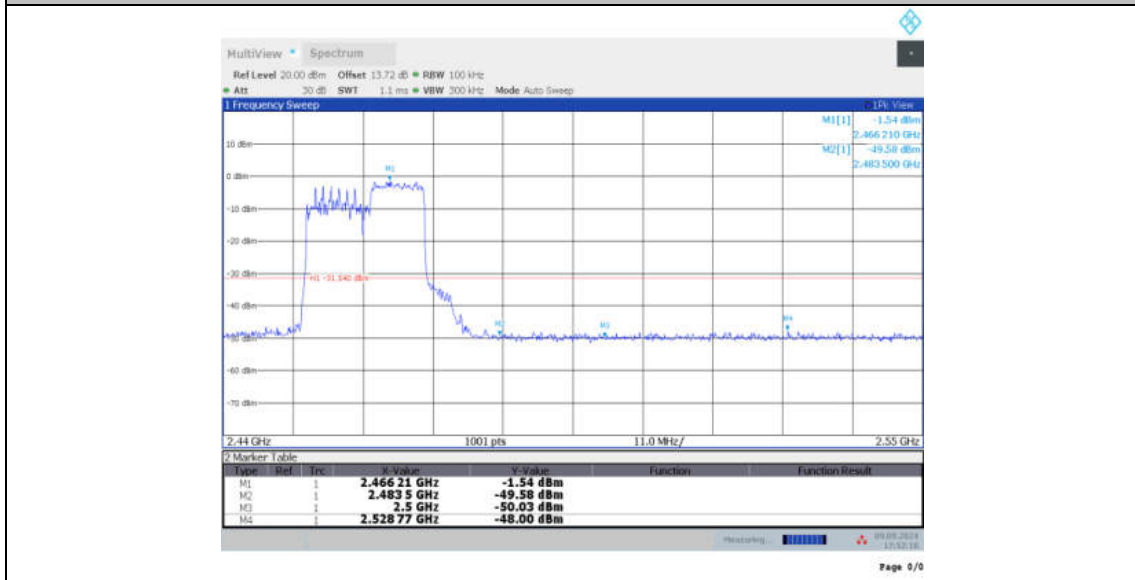


11BE20MIMO\_Ant12\_Low\_2412\_26Tone\_RU0

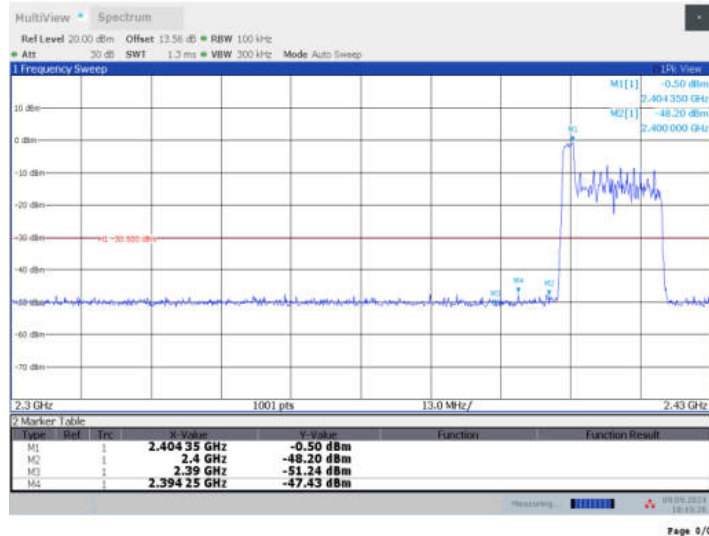


11BE20MIMO\_Ant12\_Low\_2412\_26Tone\_RU8




11BE20MIMO\_Ant12\_Low\_2412\_52Tone\_RU37

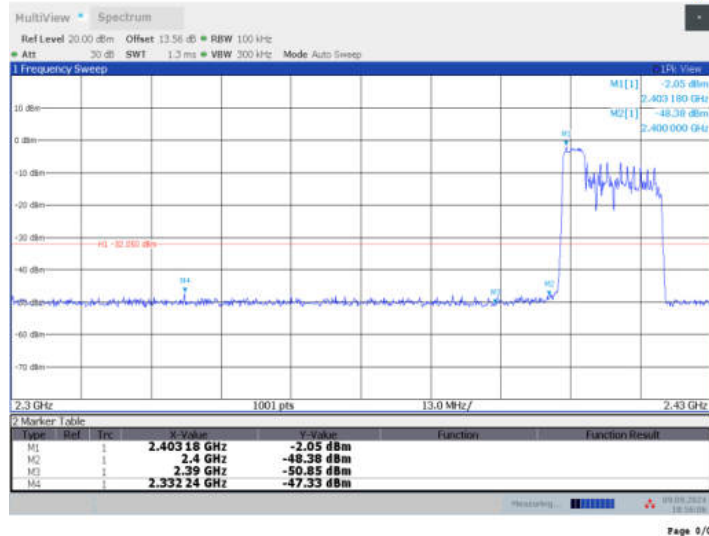


11BE20MIMO\_Ant12\_Low\_2412\_52Tone\_RU40

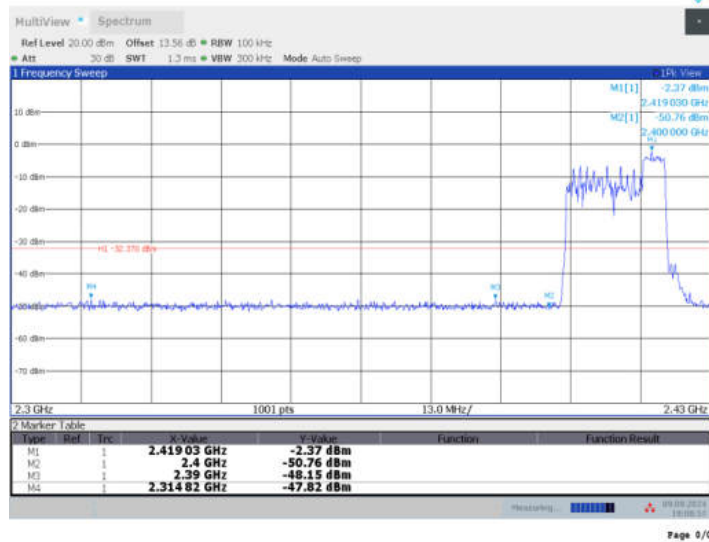


11BE20MIMO\_Ant12\_Low\_2412\_106Tone\_RU53

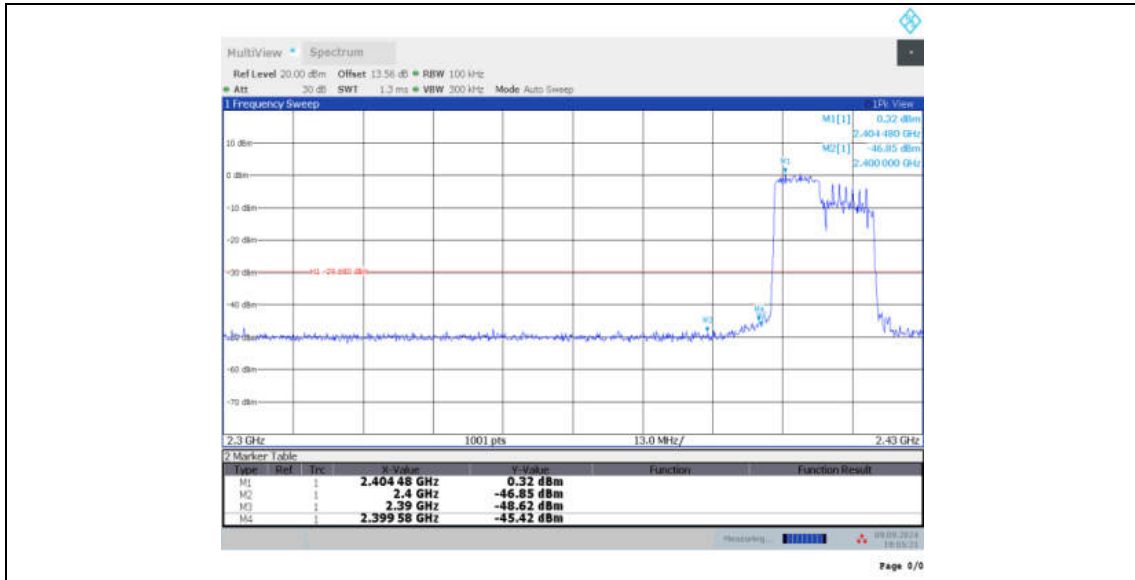


11BE20MIMO\_Ant12\_Low\_2412\_106Tone\_RU54

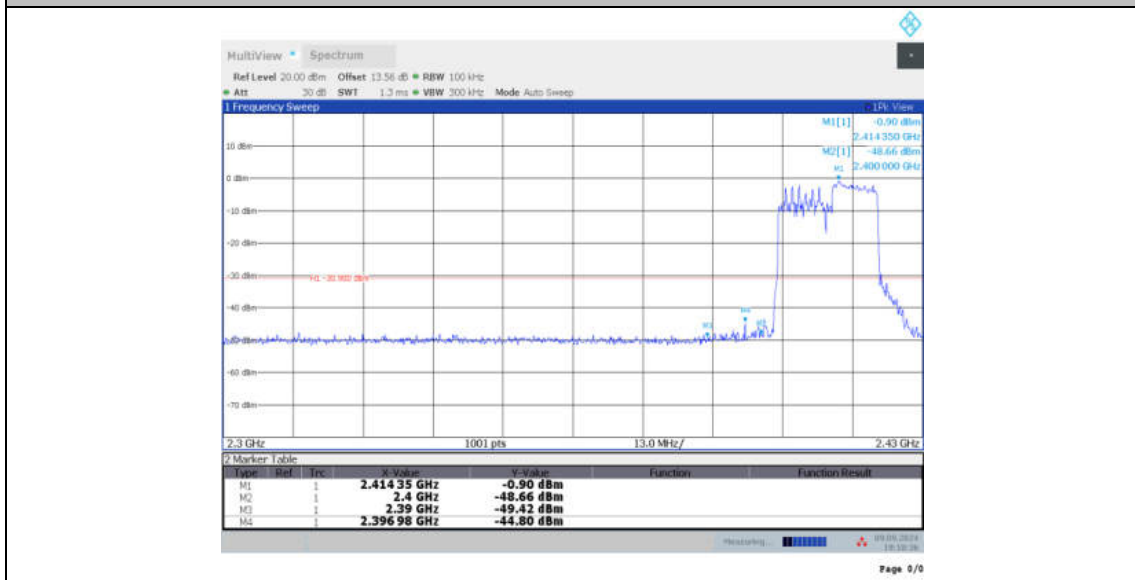


11BE20MIMO\_Ant7\_Low\_2412\_26Tone\_RU0

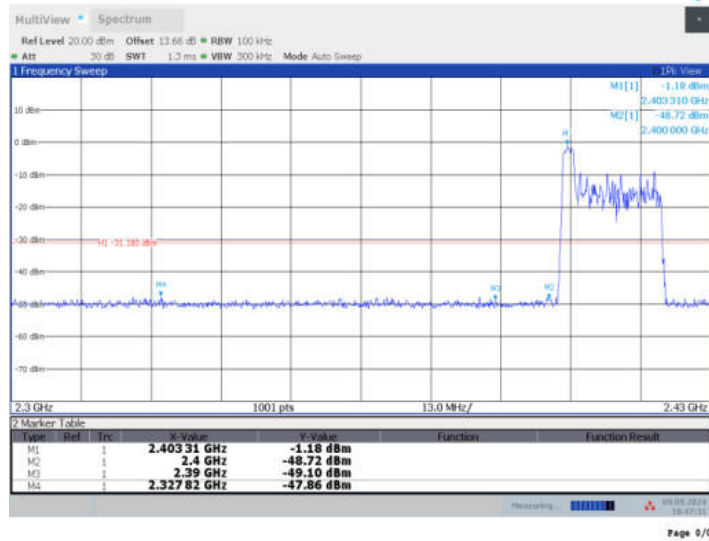


11BE20MIMO\_Ant7\_Low\_2412\_26Tone\_RU8

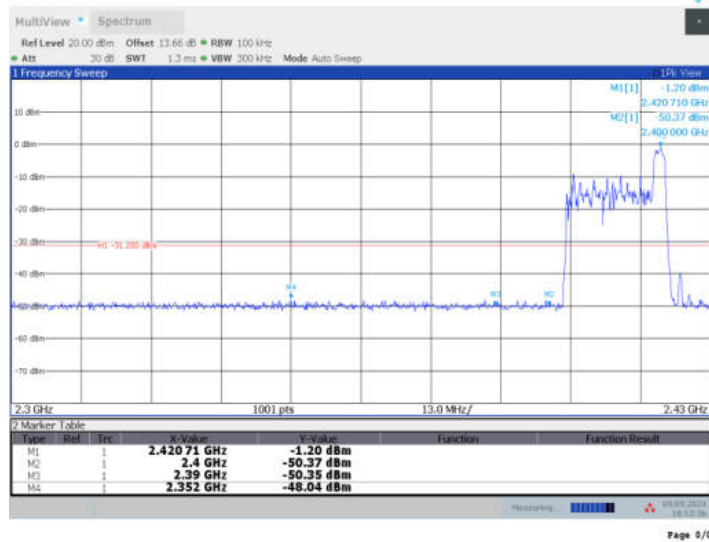

11BE20MIMO\_Ant7\_Low\_2412\_52Tone\_RU37

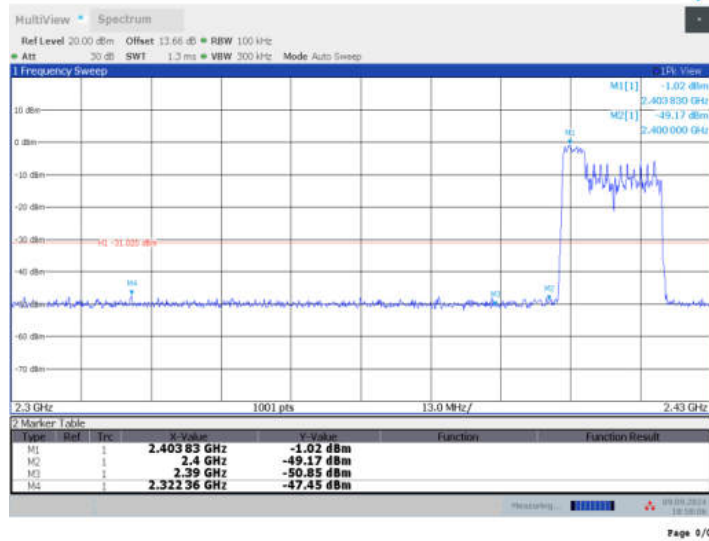

11BE20MIMO\_Ant7\_Low\_2412\_52Tone\_RU40

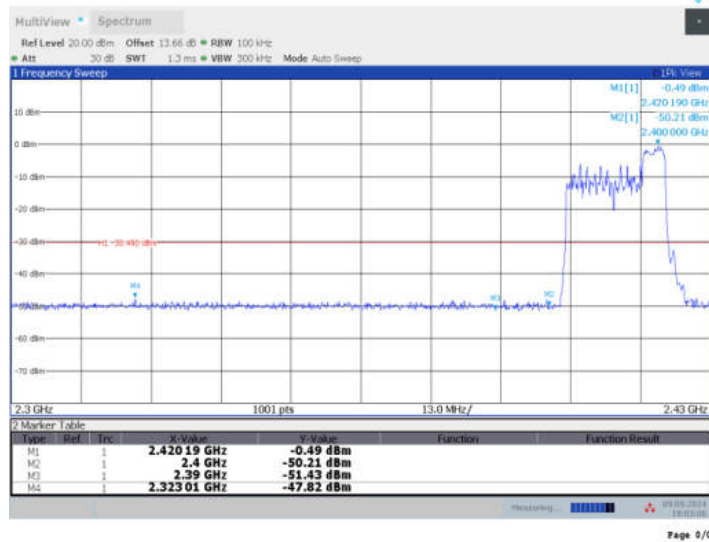


11BE20MIMO\_Ant7\_Low\_2412\_106Tone\_RU53







11BE20MIMO\_Ant7\_Low\_2412\_106Tone\_RU54

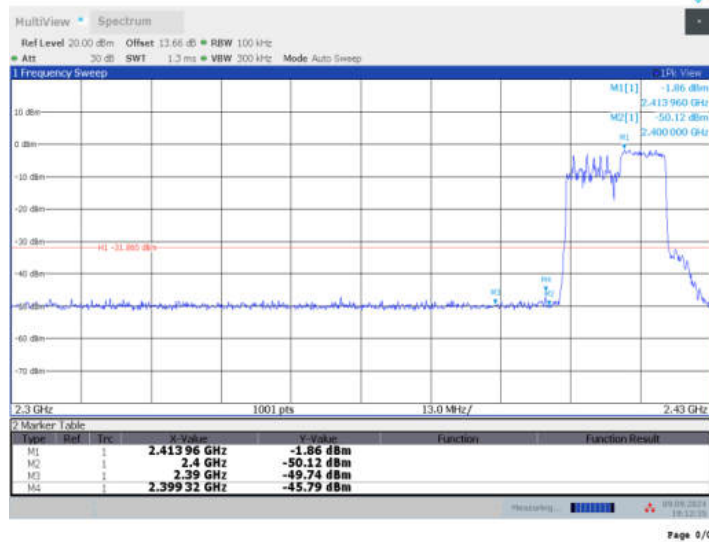


11BE20MIMO\_Ant12\_High\_2462\_26Tone\_RU0

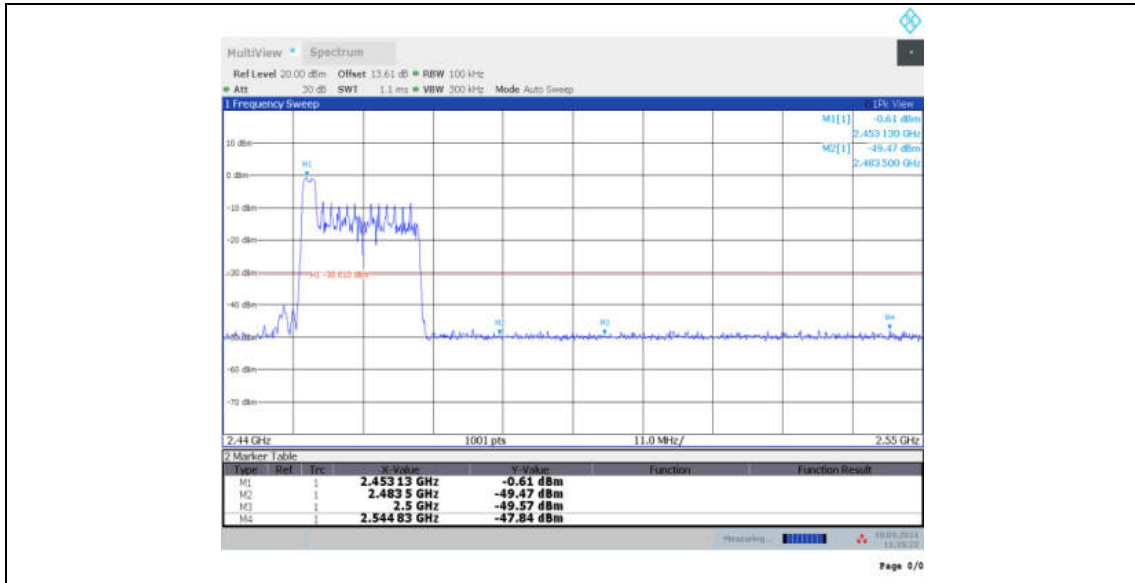


11BE20MIMO\_Ant12\_High\_2462\_26Tone\_RU8

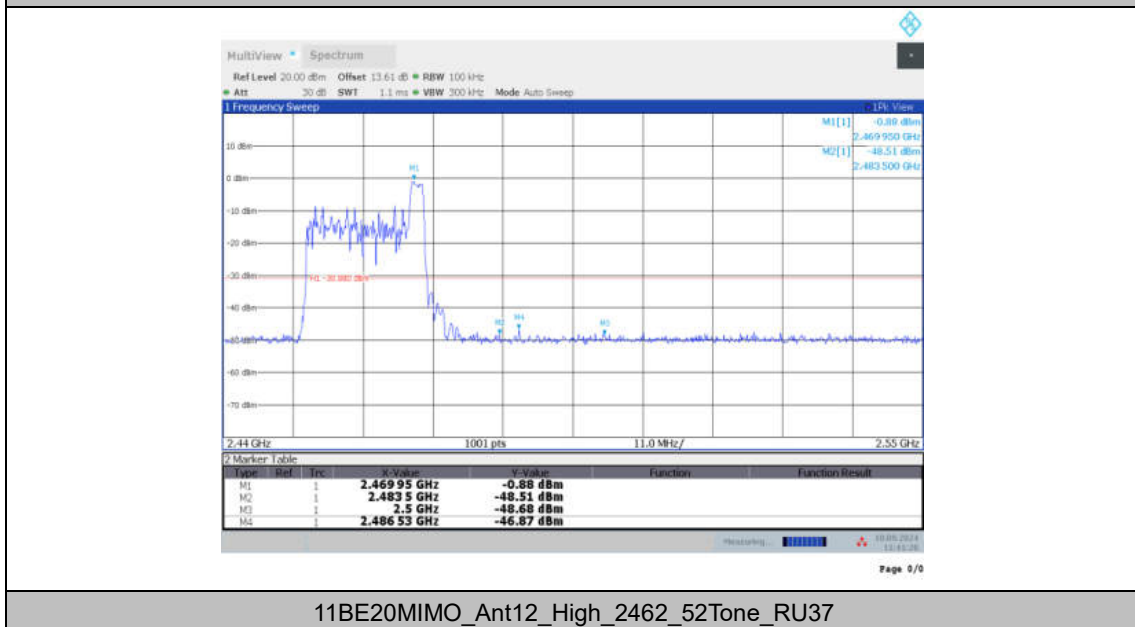


11BE20MIMO\_Ant12\_High\_2462\_52Tone\_RU37

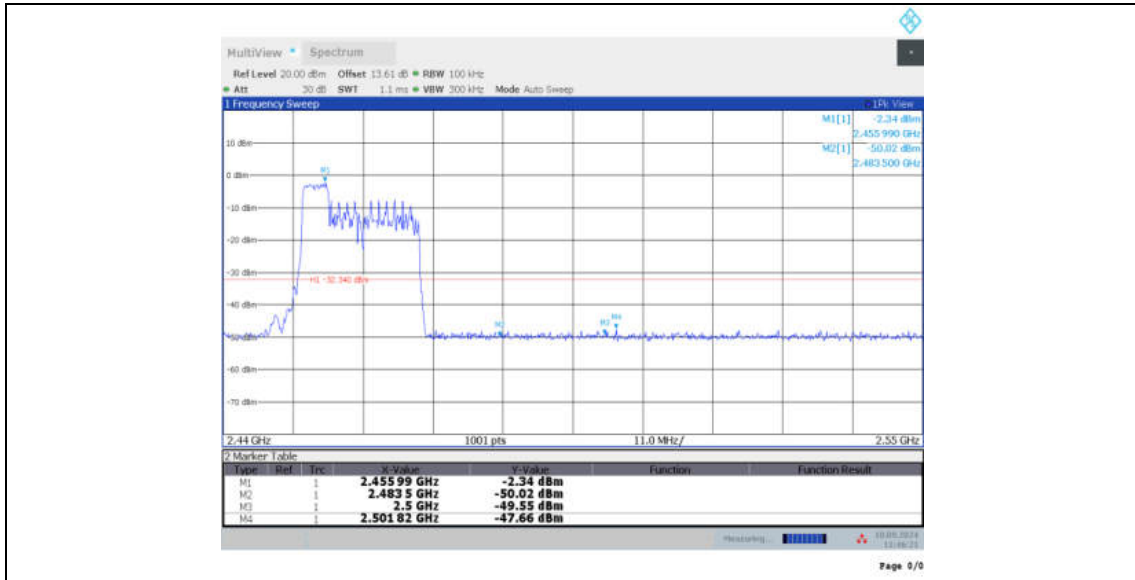


11BE20MIMO\_Ant12\_High\_2462\_52Tone\_RU40

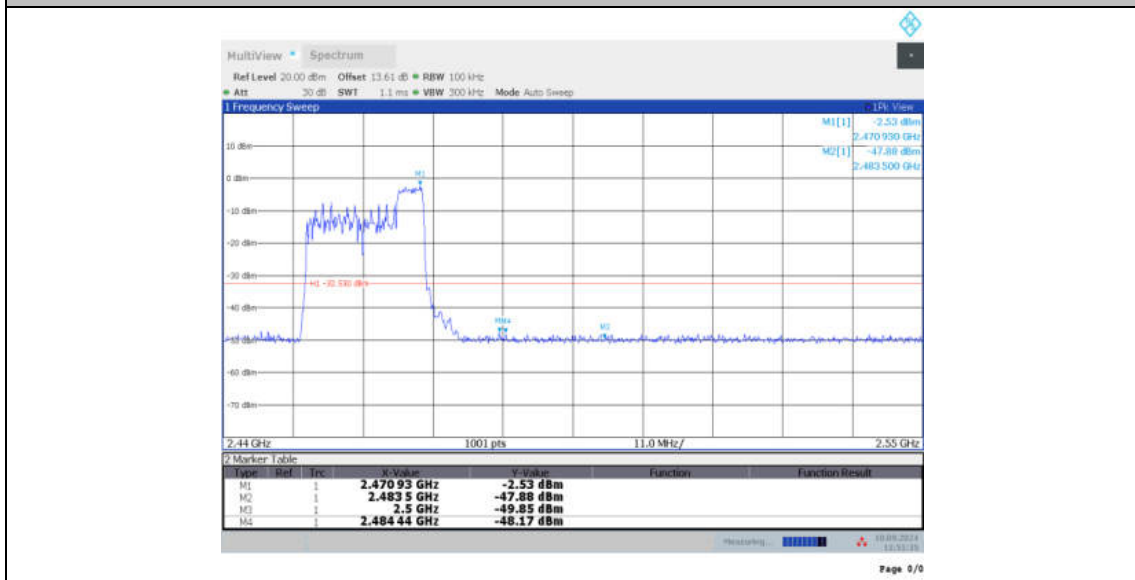


11BE20MIMO\_Ant12\_High\_2462\_106Tone\_RU53

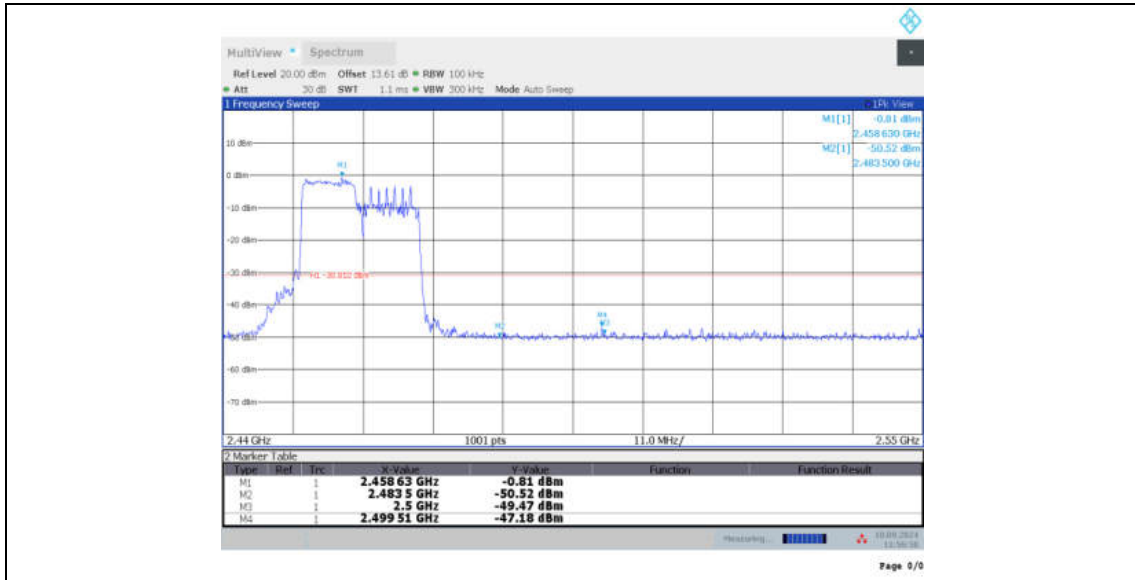


11BE20MIMO\_Ant12\_High\_2462\_106Tone\_RU54

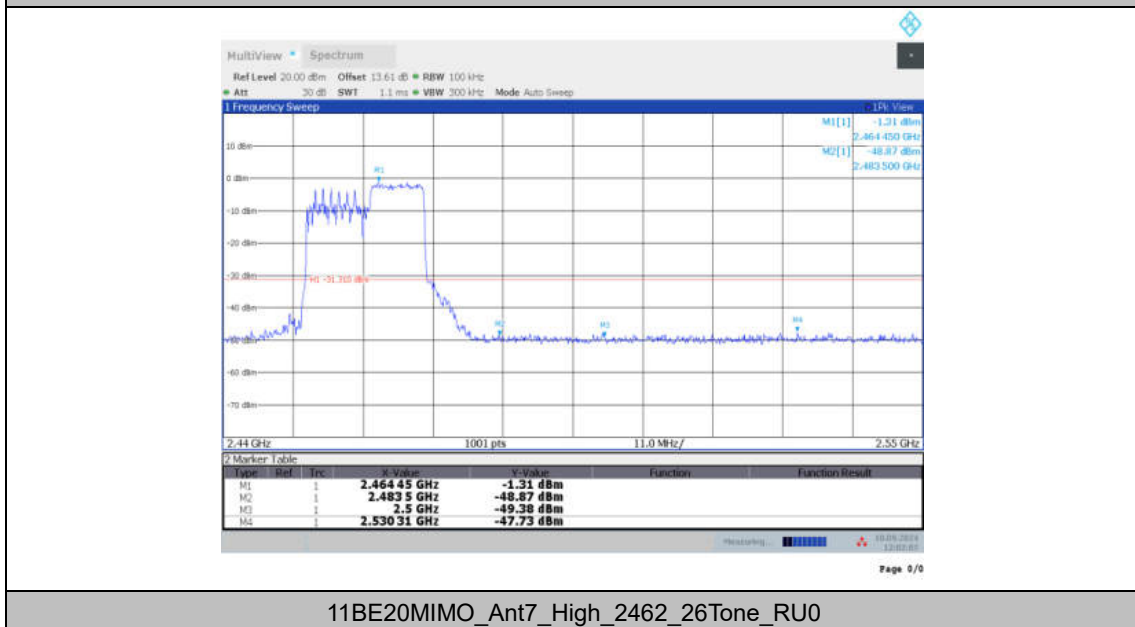


11BE20MIMO\_Ant7\_High\_2462\_26Tone\_RU0

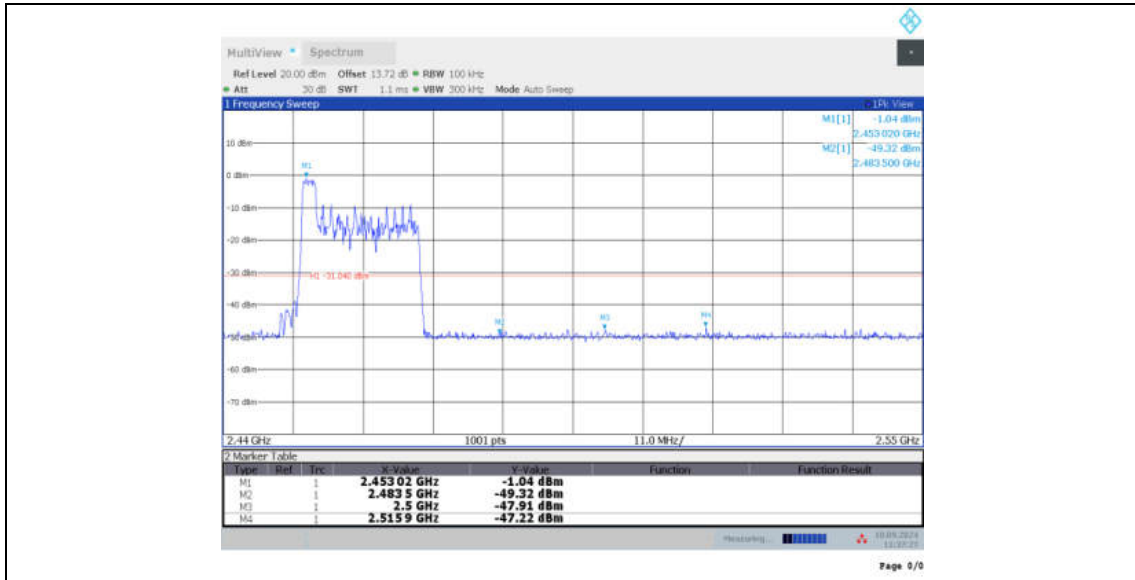


11BE20MIMO\_Ant7\_High\_2462\_26Tone\_RU8

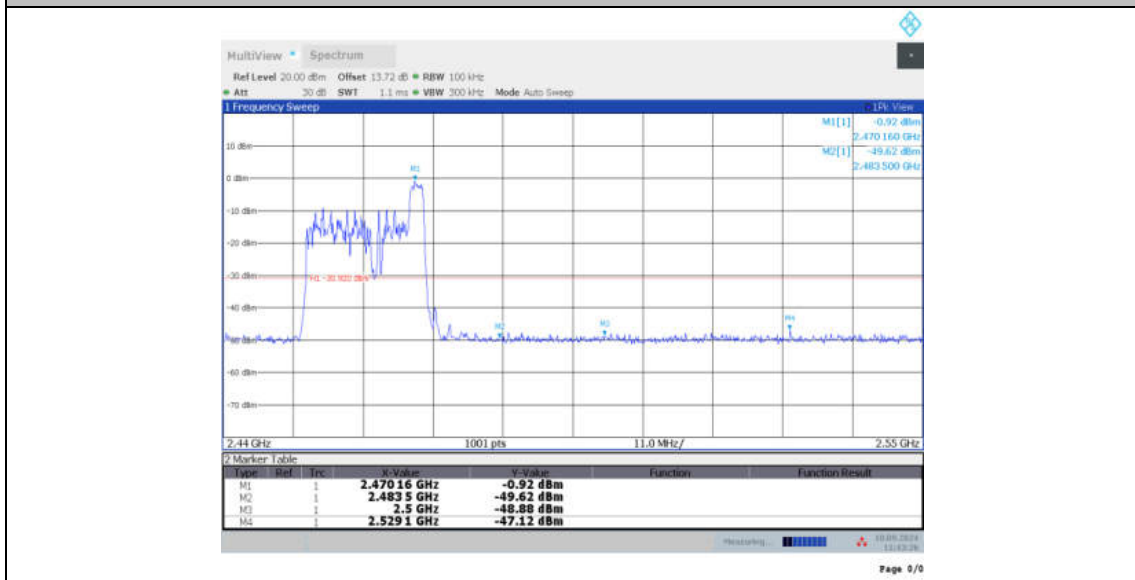


11BE20MIMO\_Ant7\_High\_2462\_52Tone\_RU37

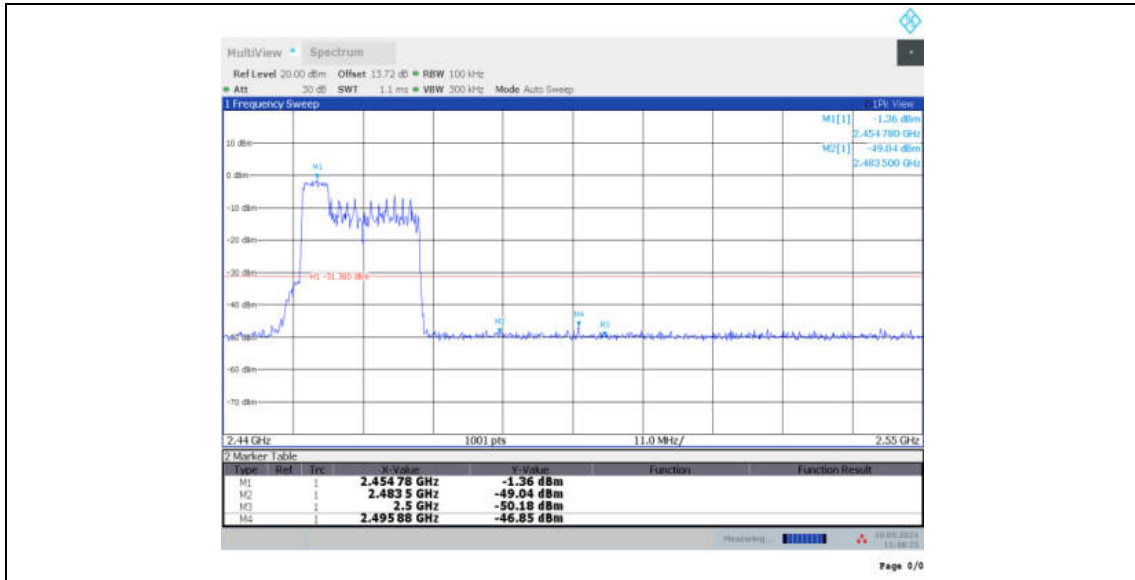


11BE20MIMO\_Ant7\_High\_2462\_52Tone\_RU40

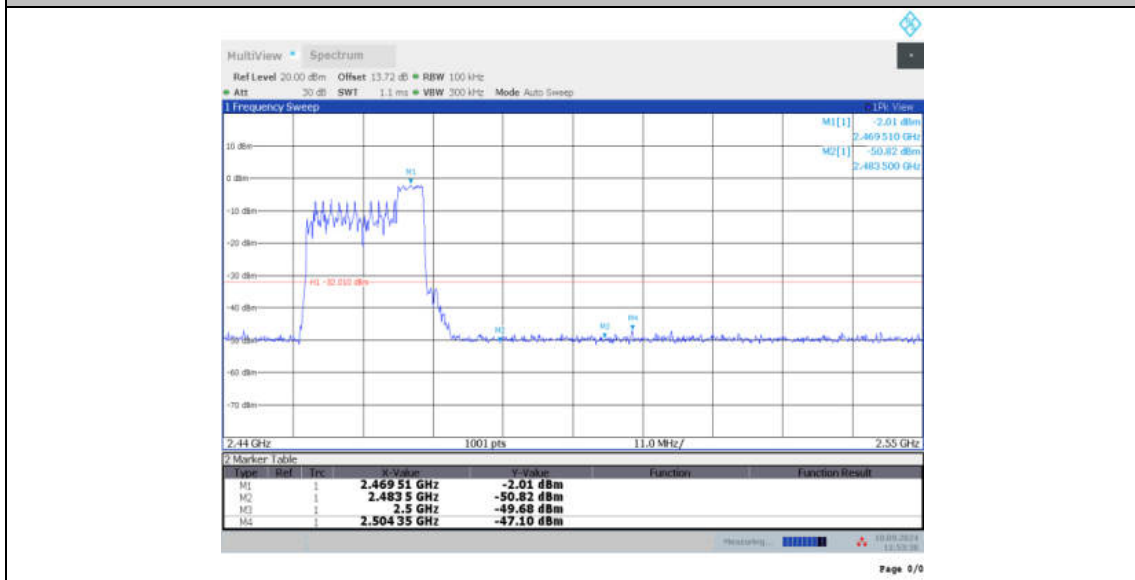

11BE20MIMO\_Ant7\_High\_2462\_106Tone\_RU53

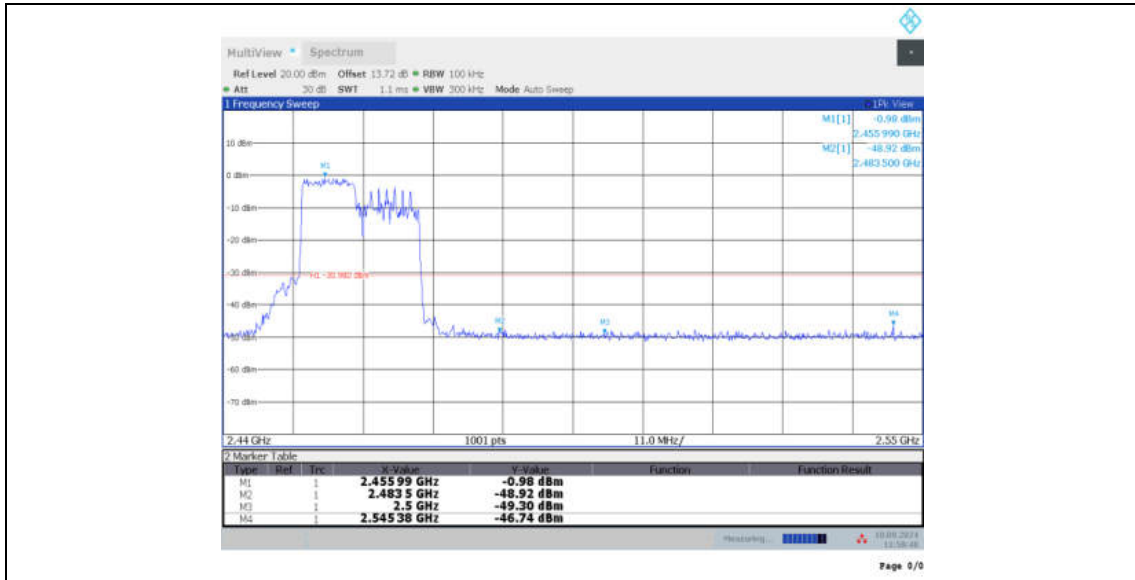


11BE20MIMO\_Ant7\_High\_2462\_106Tone\_RU54

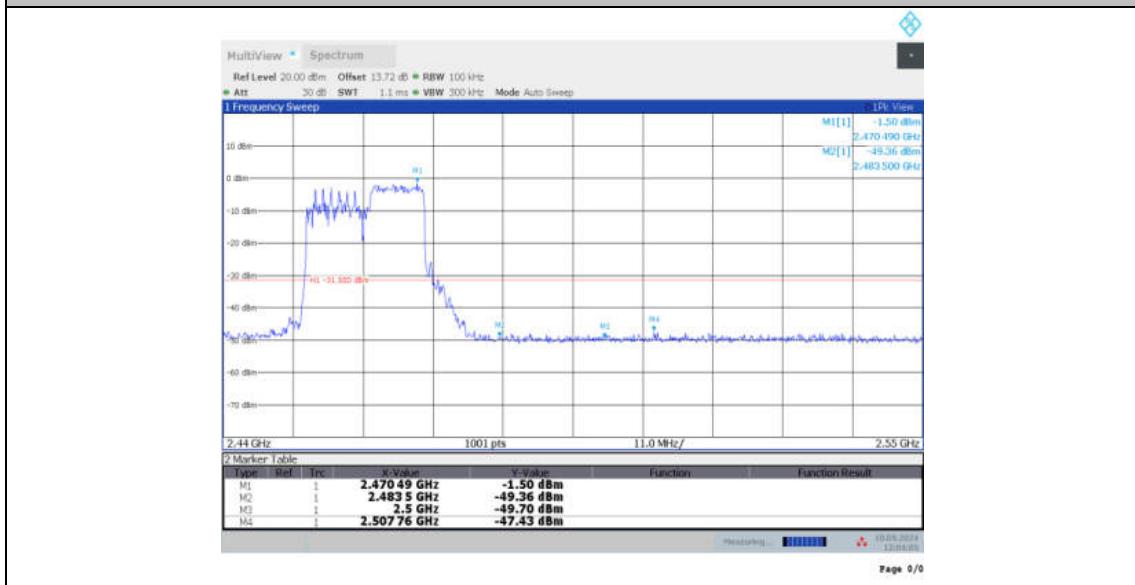


**MRU Mode**

TestMode	Antenna	Channel	Mru Type	Mru Index	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11BE20MIMO	Ant12	2412	52+26_OFDMA	1	-1.93	-47.85	≤-31.93	PASS
				2	-4.01	-47.14	≤-34.01	PASS
			106+26_OFDMA	1	-0.31	-44.93	≤-30.31	PASS
				4	0.09	-46.55	≤-29.91	PASS
	Ant7	2412	52+26_OFDMA	1	-2.69	-47.22	≤-32.69	PASS
				2	-2.28	-47.7	≤-32.28	PASS
			106+26_OFDMA	1	-0.66	-43.09	≤-30.66	PASS
				4	-0.97	-47.54	≤-30.97	PASS
	Ant12	2462	52+26_OFDMA	1	-3.26	-47.41	≤-33.26	PASS
				2	-4.54	-47.74	≤-34.54	PASS
			106+26_OFDMA	1	-1.33	-47.49	≤-31.33	PASS
				4	-1.25	-47.6	≤-31.25	PASS
	Ant7	2462	52+26_OFDMA	1	-3.43	-47.58	≤-33.43	PASS
				2	-2.94	-47.33	≤-32.94	PASS
			106+26_OFDMA	1	-1.02	-47.06	≤-31.02	PASS
				4	-1.84	-47.71	≤-31.84	PASS

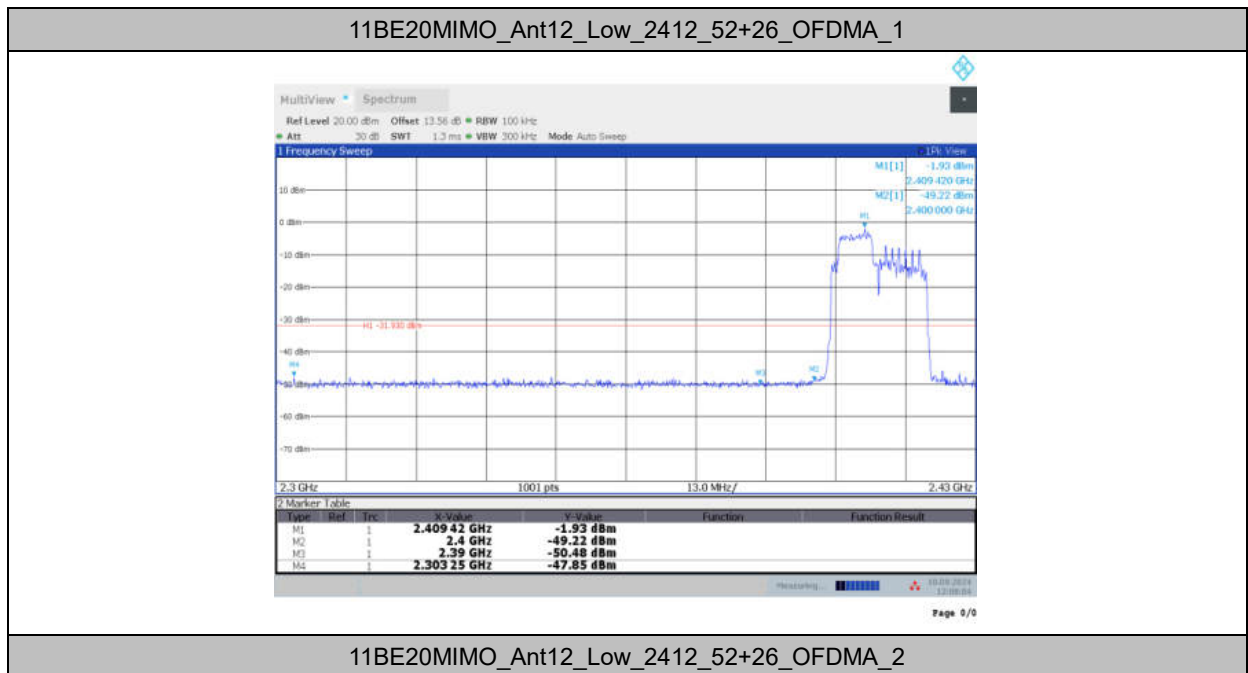



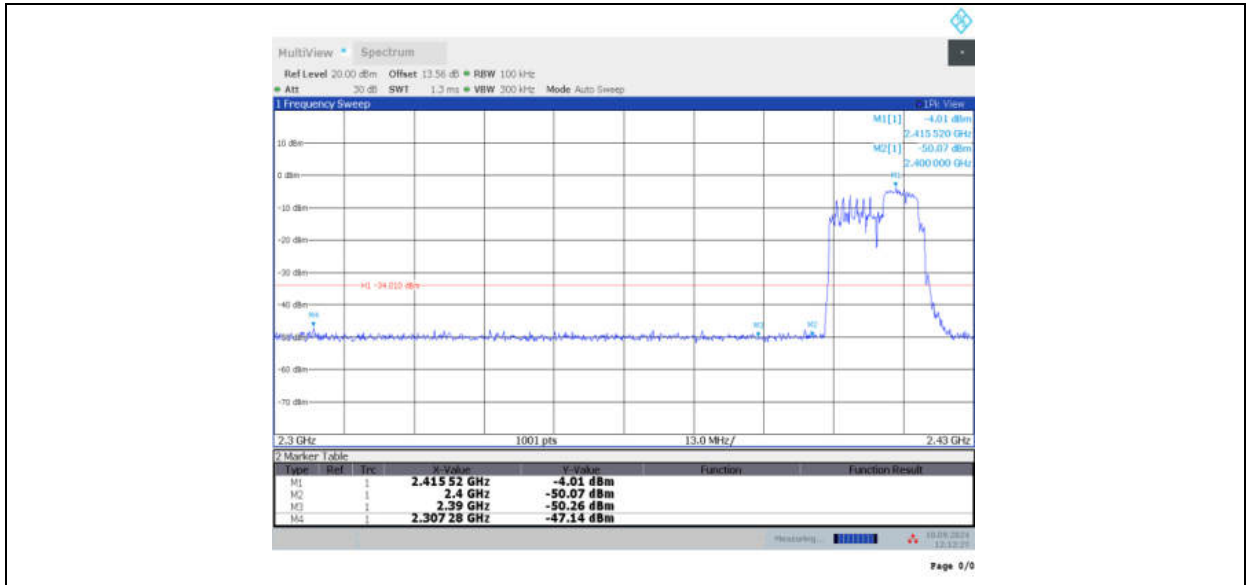


11BE20MIMO\_Ant12\_Low\_2412\_106+26\_OFDMA\_1




11BE20MIMO\_Ant12\_Low\_2412\_106+26\_OFDMA\_4




11BE20MIMO\_Ant7\_Low\_2412\_52+26\_OFDMA\_1

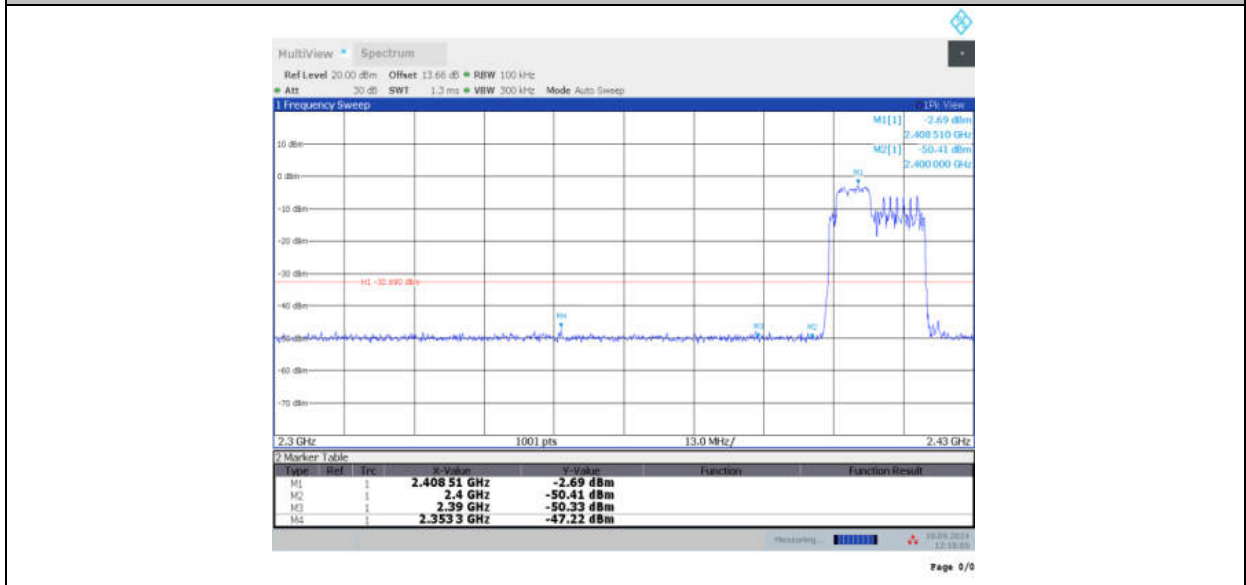

11BE20MIMO\_Ant7\_Low\_2412\_52+26\_OFDMA\_2

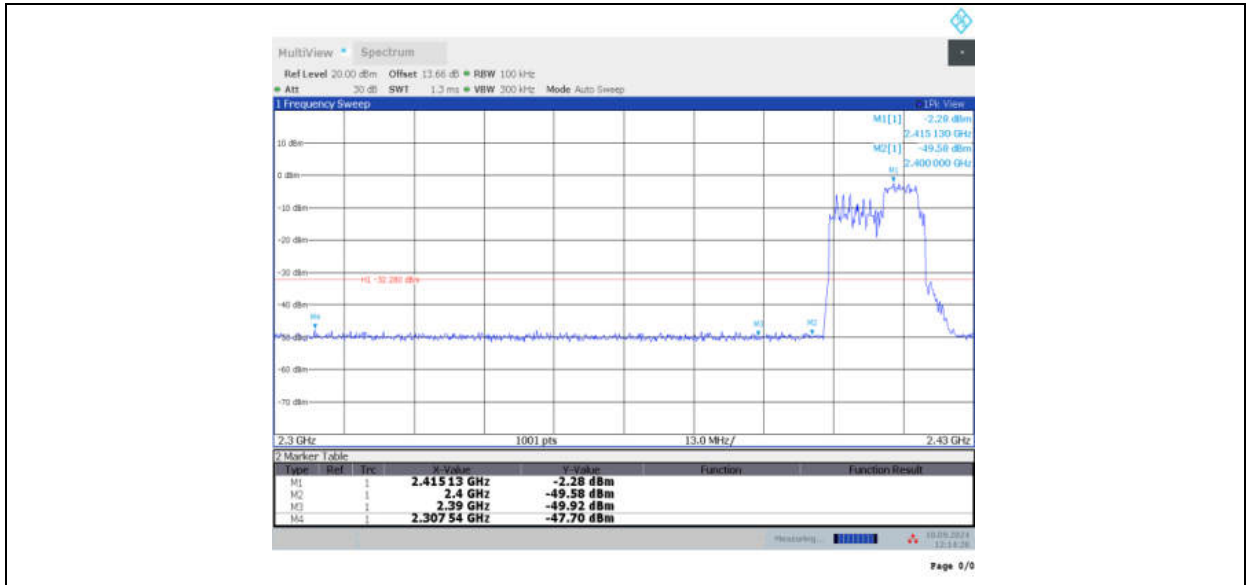


11BE20MIMO\_Ant7\_Low\_2412\_106+26\_OFDMA\_1

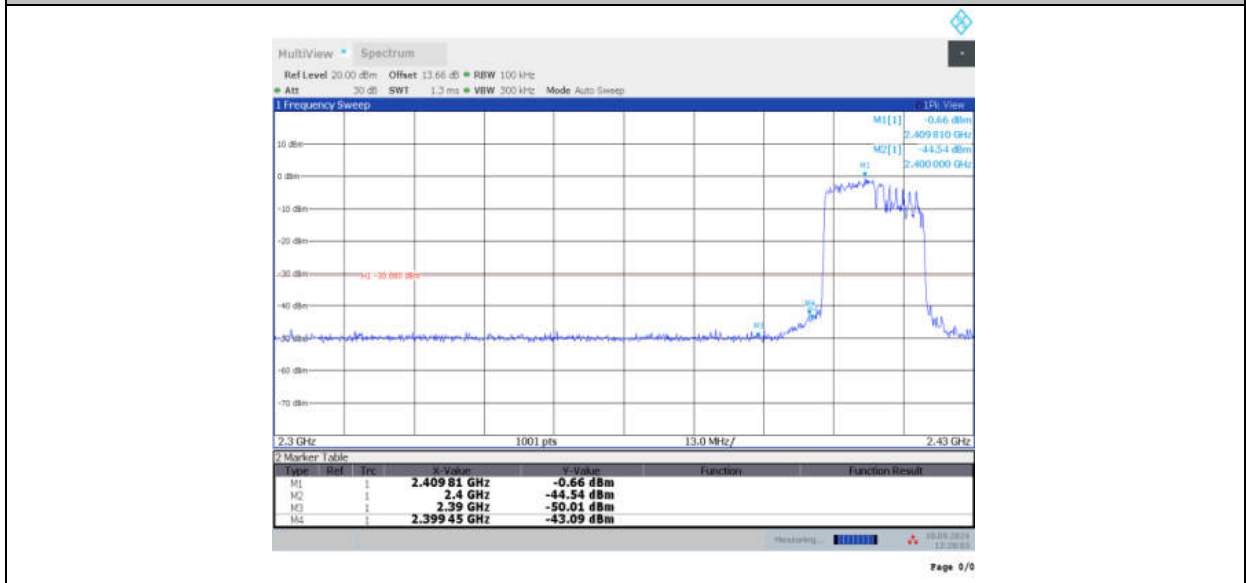


11BE20MIMO\_Ant7\_Low\_2412\_106+26\_OFDMA\_4




11BE20MIMO\_Ant12\_High\_2462\_52+26\_OFDMA\_1

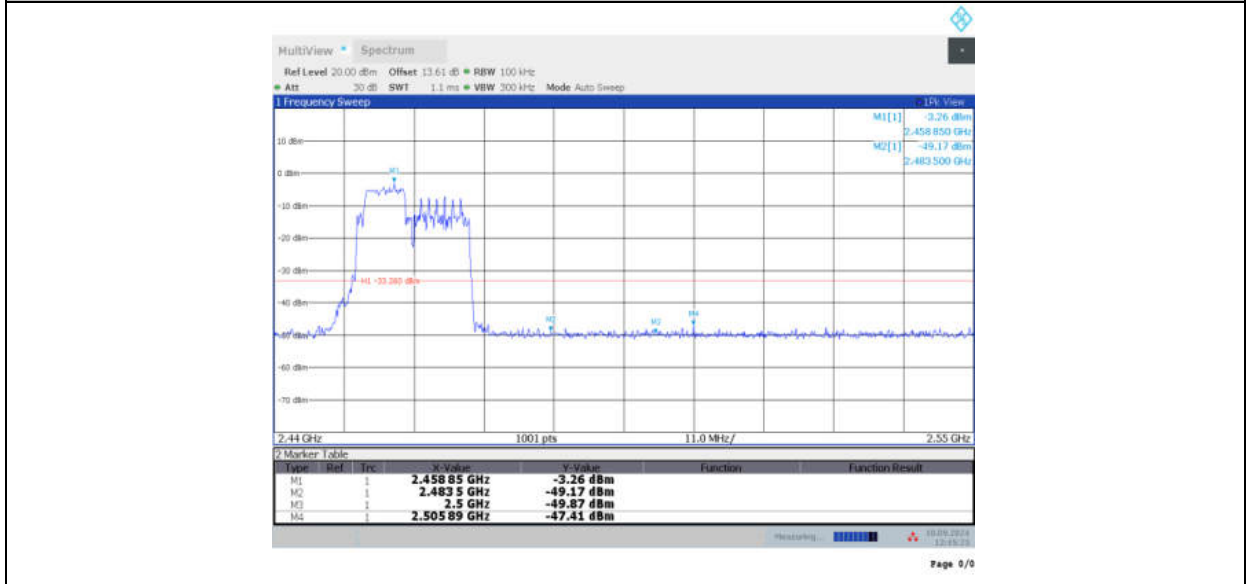


11BE20MIMO\_Ant12\_High\_2462\_52+26\_OFDMA\_2

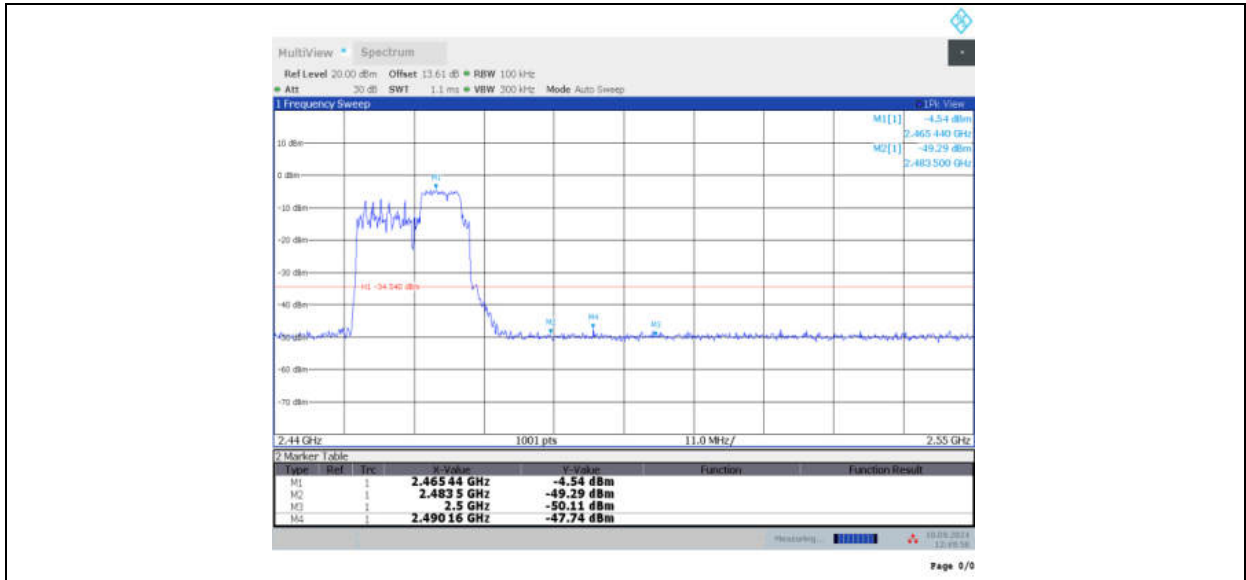


11BE20MIMO\_Ant12\_High\_2462\_106+26\_OFDMA\_1

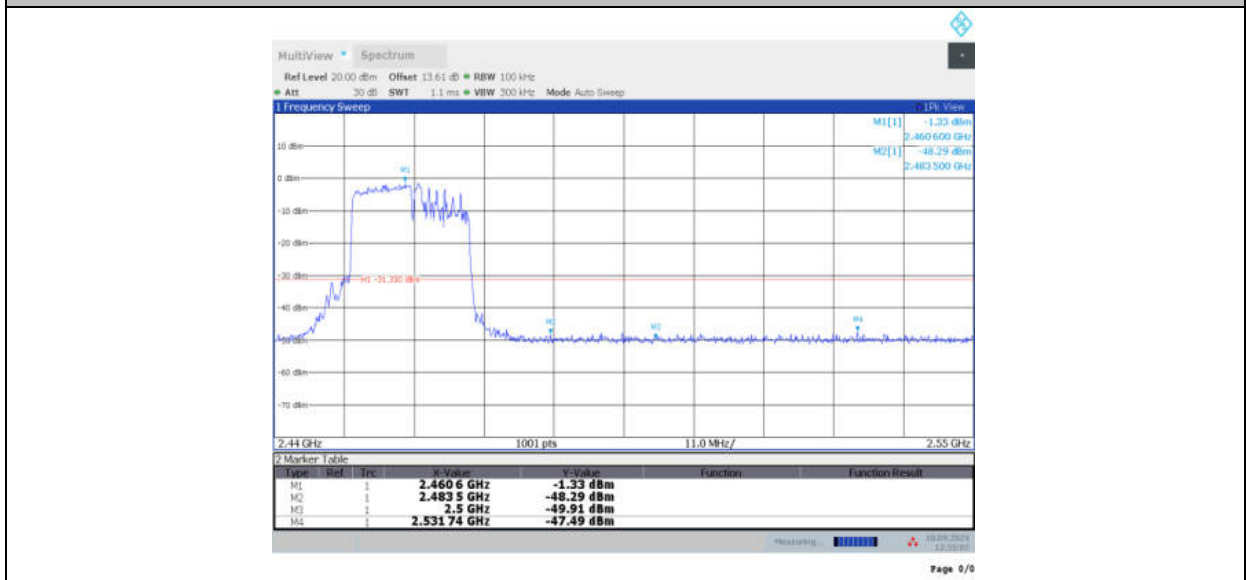


11BE20MIMO\_Ant12\_High\_2462\_106+26\_OFDMA\_4

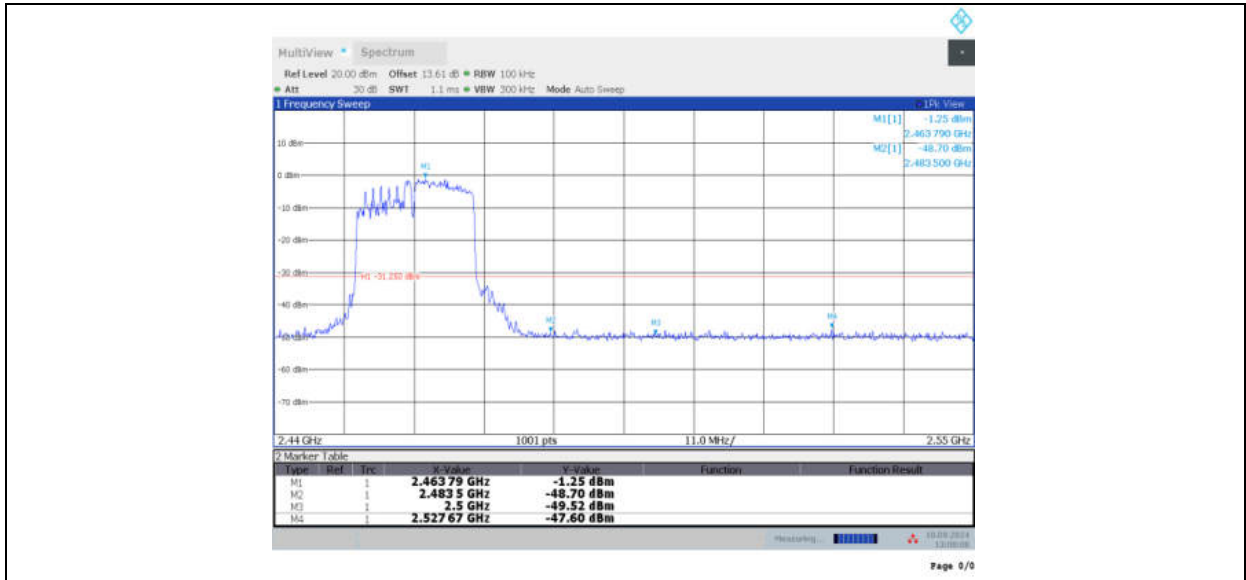


11BE20MIMO\_Ant7\_High\_2462\_52+26\_OFDMA\_1

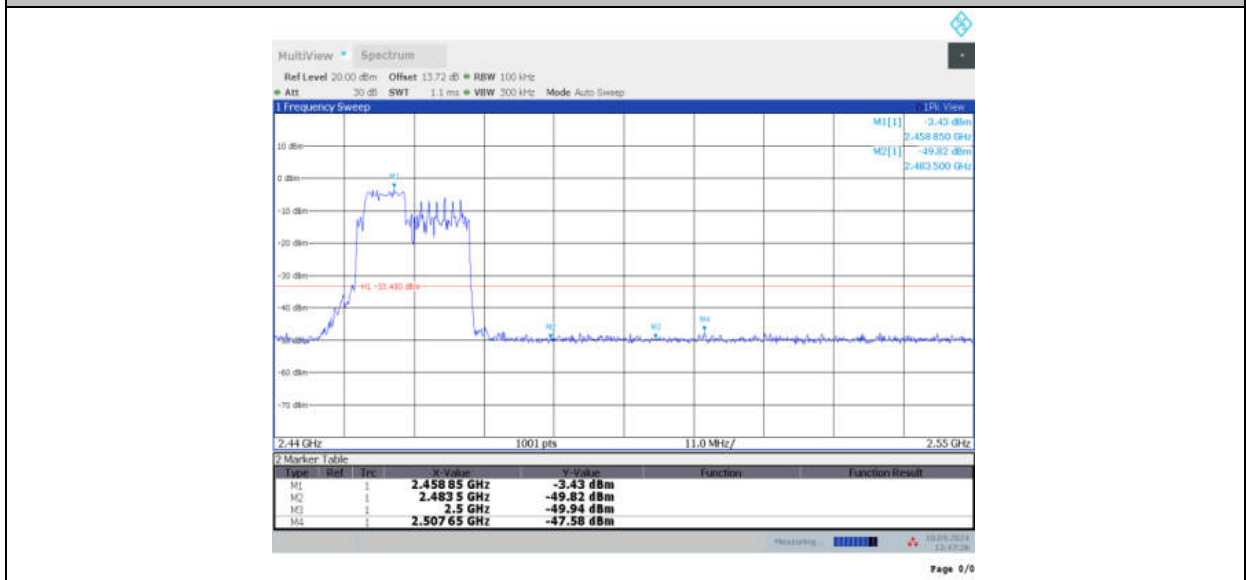


11BE20MIMO\_Ant7\_High\_2462\_52+26\_OFDMA\_2

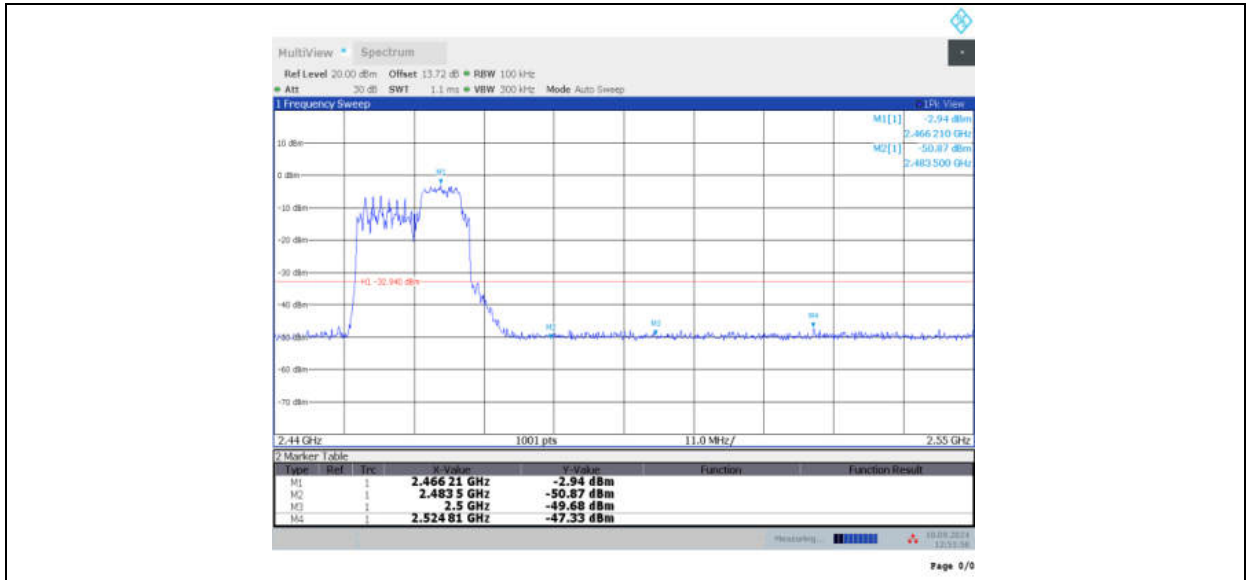

11BE20MIMO\_Ant7\_High\_2462\_106+26\_OFDMA\_1

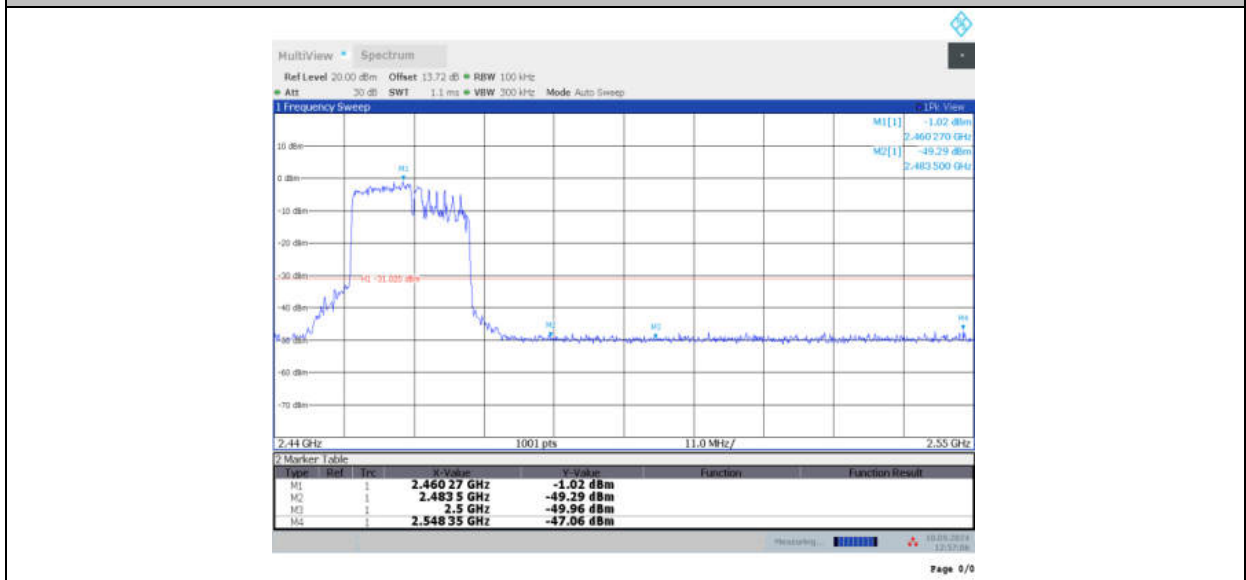

11BE20MIMO\_Ant7\_High\_2462\_106+26\_OFDMA\_4

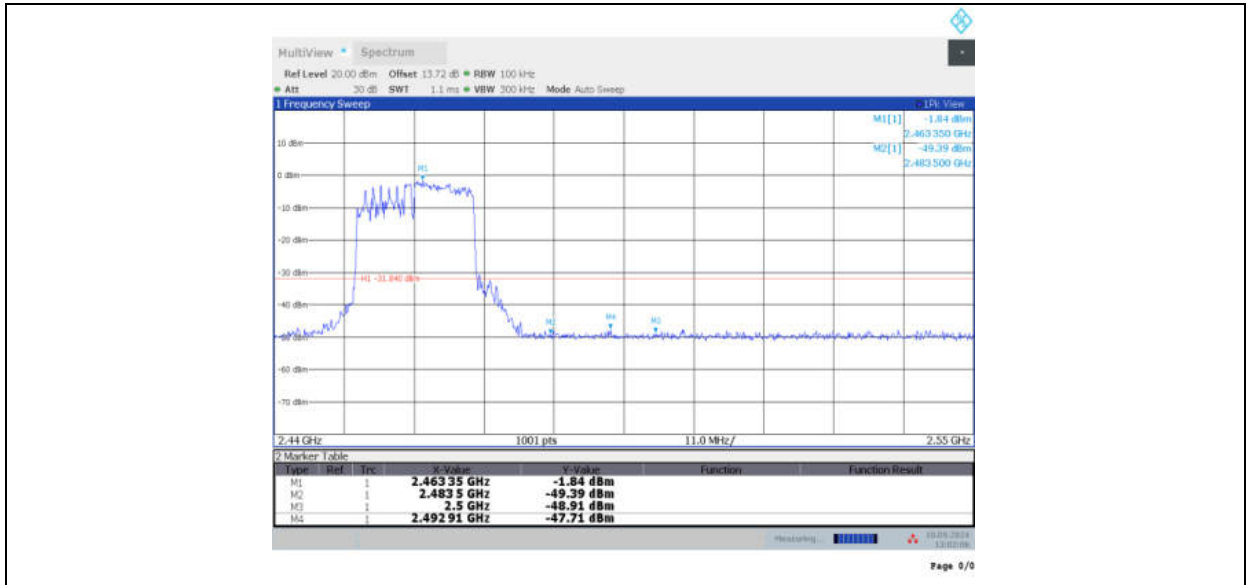

**Conclusion: Pass**



## **A.6. Transmitter Spurious Emission**

### **A.6.1 Transmitter Spurious Emission – Conducted**

#### **Method of Measurement: See ANSI C63.10-2013-clause 11.11**

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### **Measurement Limit:**

<b>Standard</b>	<b>Limit</b>
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**EUT ID: UT02a**


**Measurement Results:**

TestMode	Antenna	Frequency [MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B-CDD	Ant12	2412	Reference	10.32	10.32	---	PASS
			30~1000	10.32	-55.46	≤-9.68	PASS
			1000~26500	10.32	-48.77	≤-9.68	PASS
	Ant7	2412	Reference	8.86	8.86	---	PASS
			30~1000	8.86	-55.99	≤-11.14	PASS
			1000~26500	8.86	-49.14	≤-11.14	PASS
	Ant12	2437	Reference	9.97	9.97	---	PASS
			30~1000	9.97	-55.85	≤-10.03	PASS
			1000~26500	9.97	-49.32	≤-10.03	PASS
	Ant7	2437	Reference	9.68	9.68	---	PASS
			30~1000	9.68	-55.81	≤-10.32	PASS
			1000~26500	9.68	-49.09	≤-10.32	PASS
Ant12	2462	Reference	9.48	9.48	---	PASS	
		30~1000	9.48	-55.51	≤-10.52	PASS	
		1000~26500	9.48	-49.26	≤-10.52	PASS	
Ant7	2462	Reference	9.04	9.04	---	PASS	
		30~1000	9.04	-55.69	≤-10.96	PASS	
		1000~26500	9.04	-48.54	≤-10.96	PASS	
11G-CDD	Ant12	2412	Reference	2.43	2.43	---	PASS
			30~1000	2.43	-55.73	≤-17.57	PASS
			1000~26500	2.43	-49.17	≤-17.57	PASS
	Ant7	2412	Reference	1.45	1.45	---	PASS
			30~1000	1.45	-55.4	≤-18.55	PASS
			1000~26500	1.45	-48.28	≤-18.55	PASS
	Ant12	2437	Reference	6.94	6.94	---	PASS
			30~1000	6.94	-55.42	≤-13.06	PASS
			1000~26500	6.94	-49.47	≤-13.06	PASS
	Ant7	2437	Reference	7.05	7.05	---	PASS
			30~1000	7.05	-55.8	≤-12.95	PASS
			1000~26500	7.05	-49.64	≤-12.95	PASS
Ant12	2462	Reference	0.90	0.90	---	PASS	
		30~1000	0.90	-54.54	≤-19.1	PASS	
		1000~26500	0.90	-48.92	≤-19.1	PASS	
Ant7	2462	Reference	0.47	0.47	---	PASS	
		30~1000	0.47	-55.86	≤-19.53	PASS	
		1000~26500	0.47	-49.38	≤-19.53	PASS	
11N20MI MO	Ant12	2412	Reference	2.56	2.56	---	PASS
			30~1000	2.56	-55.36	≤-17.44	PASS
			1000~26500	2.56	-49.31	≤-17.44	PASS
	Ant7	2412	Reference	1.21	1.21	---	PASS


			30~1000	1.21	-56.11	≤-18.79	PASS	
			1000~26500	1.21	-48.5	≤-18.79	PASS	
			Reference	7.02	7.02	---	PASS	
	Ant12	2437		30~1000	7.02	-55.54	≤-12.98	PASS
				1000~26500	7.02	-49.13	≤-12.98	PASS
				Reference	7.10	7.10	---	PASS
	Ant7	2437		30~1000	7.10	-55.5	≤-12.9	PASS
				1000~26500	7.10	-49.55	≤-12.9	PASS
				Reference	0.74	0.74	---	PASS
	Ant12	2462		30~1000	0.74	-55.87	≤-19.26	PASS
				1000~26500	0.74	-49.26	≤-19.26	PASS
				Reference	0.20	0.20	---	PASS
Ant7	2462		30~1000	0.20	-55.78	≤-19.8	PASS	
			1000~26500	0.20	-48.84	≤-19.8	PASS	
			Reference	2.54	2.54	---	PASS	
11AC20MI MO	Ant12	2412	30~1000	2.54	-56.09	≤-17.46	PASS	
			1000~26500	2.54	-49.58	≤-17.46	PASS	
			Reference	1.54	1.54	---	PASS	
	Ant7	2412		30~1000	1.54	-55.98	≤-18.46	PASS
				1000~26500	1.54	-49.58	≤-18.46	PASS
				Reference	7.09	7.09	---	PASS
	Ant12	2437		30~1000	7.09	-55.87	≤-12.91	PASS
				1000~26500	7.09	-49.05	≤-12.91	PASS
				Reference	7.26	7.26	---	PASS
	Ant7	2437		30~1000	7.26	-56.18	≤-12.74	PASS
				1000~26500	7.26	-49.07	≤-12.74	PASS
				Reference	1.03	1.03	---	PASS
	Ant12	2462		30~1000	1.03	-55.54	≤-18.97	PASS
				1000~26500	1.03	-48.44	≤-18.97	PASS
				Reference	0.08	0.08	---	PASS
	Ant7	2462		30~1000	0.08	-55.1	≤-19.92	PASS
				1000~26500	0.08	-49.19	≤-19.92	PASS
				Reference	2.47	2.47	---	PASS
11AX20MI MO	Ant12	2412	30~1000	2.47	-55.9	≤-17.53	PASS	
			1000~26500	2.47	-49.59	≤-17.53	PASS	
			Reference	1.42	1.42	---	PASS	
	Ant7	2412		30~1000	1.42	-55.4	≤-18.58	PASS
				1000~26500	1.42	-49.58	≤-18.58	PASS
				Reference	6.51	6.51	---	PASS
	Ant12	2437		30~1000	6.51	-55.99	≤-13.49	PASS
				1000~26500	6.51	-49.34	≤-13.49	PASS
				Reference	6.56	6.56	---	PASS
	Ant7	2437		Reference	6.56	6.56	---	PASS

			30~1000	6.56	-56.03	≤-13.44	PASS
			1000~26500	6.56	-49.41	≤-13.44	PASS
	Ant12	2462	Reference	1.07	1.07	---	PASS
			30~1000	1.07	-55.6	≤-18.93	PASS
	Ant7	2462	1000~26500	1.07	-49.7	≤-18.93	PASS
			Reference	0.57	0.57	---	PASS
	Ant1	2412	30~1000	0.57	-55.9	≤-19.43	PASS
			1000~26500	0.57	-49.62	≤-19.43	PASS
	Ant2	2412	Reference	2.52	2.52	---	PASS
			30~1000	2.52	-56.18	≤-17.48	PASS
	Ant1	2437	1000~26500	2.52	-49.01	≤-17.48	PASS
			Reference	1.35	1.35	---	PASS
11BE20MI MO	Ant2	2412	30~1000	1.35	-55.82	≤-18.65	PASS
			1000~26500	1.35	-49.1	≤-18.65	PASS
	Ant1	2437	Reference	6.54	6.54	---	PASS
			30~1000	6.54	-55.67	≤-13.46	PASS
	Ant2	2437	1000~26500	6.54	-49.62	≤-13.46	PASS
			Reference	6.46	6.46	---	PASS
Ant1	2462	30~1000	6.46	-55.71	≤-13.54	PASS	
		1000~26500	6.46	-49.21	≤-13.54	PASS	
Ant2	2462	Reference	1.05	1.05	---	PASS	
		30~1000	1.05	-55.69	≤-18.95	PASS	
Ant1	2462	1000~26500	1.05	-49.75	≤-18.95	PASS	
		Reference	0.55	0.55	---	PASS	
Ant2	2462	30~1000	0.55	-55.84	≤-19.45	PASS	
		1000~26500	0.55	-49.17	≤-19.45	PASS	


11B-CDD\_Ant12\_2412\_0~Reference

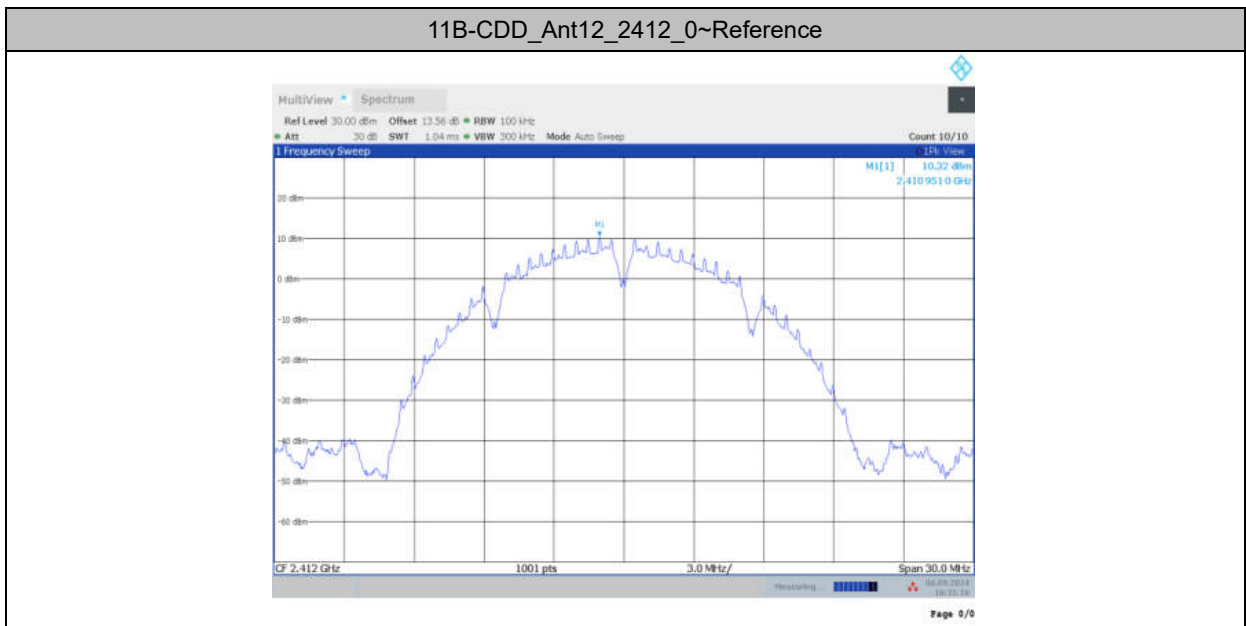


11B-CDD\_Ant12\_2412\_30~1000

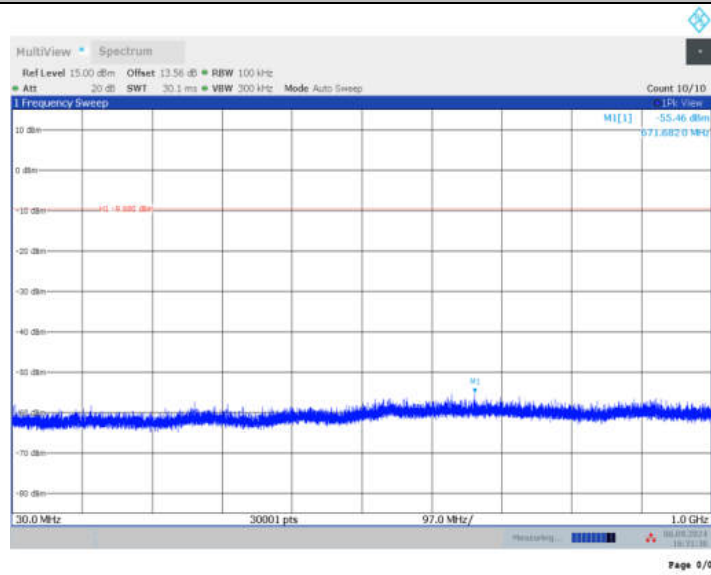


11B-CDD\_Ant12\_2412\_1000~26500

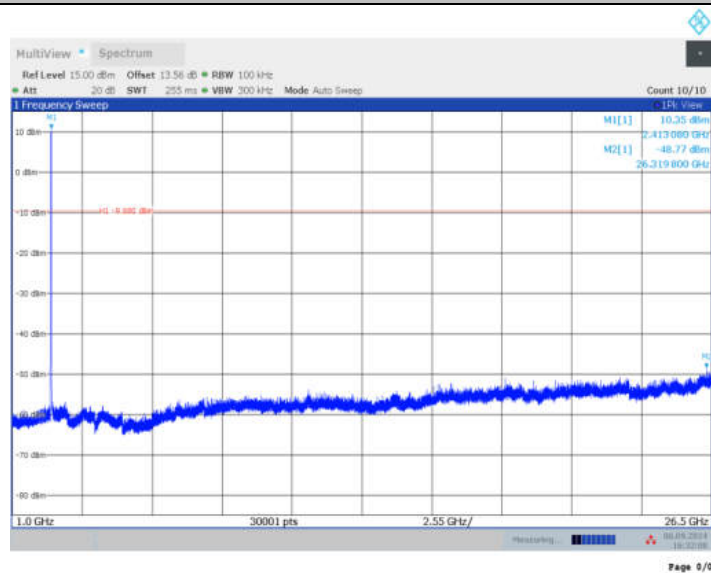


11B-CDD\_Ant7\_2412\_0~Reference

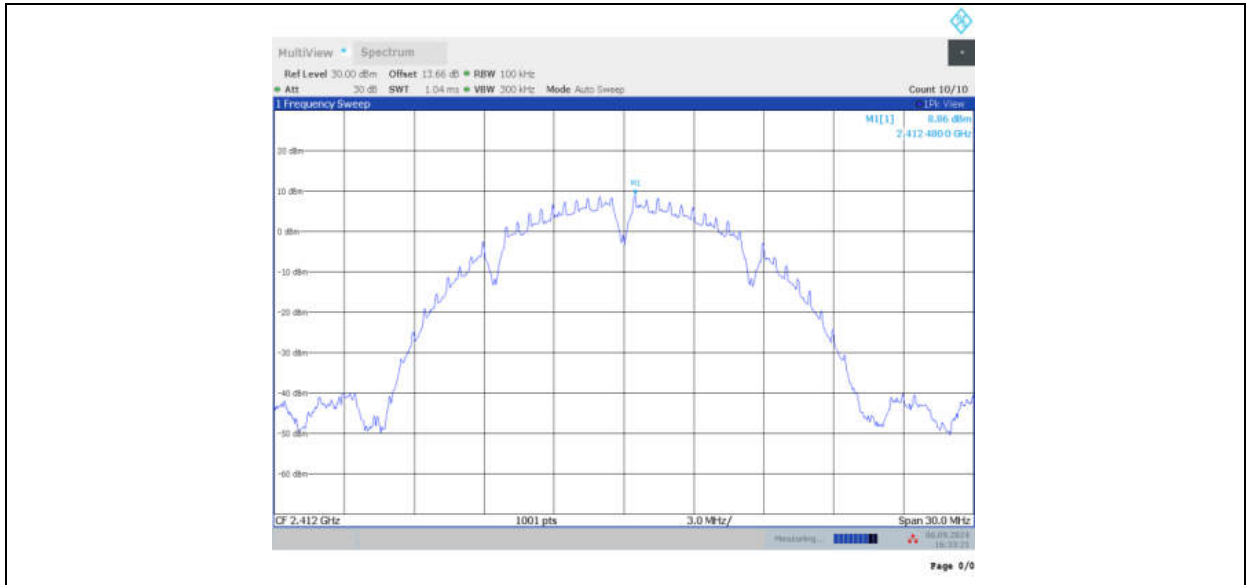


11B-CDD\_Ant7\_2412\_30~1000

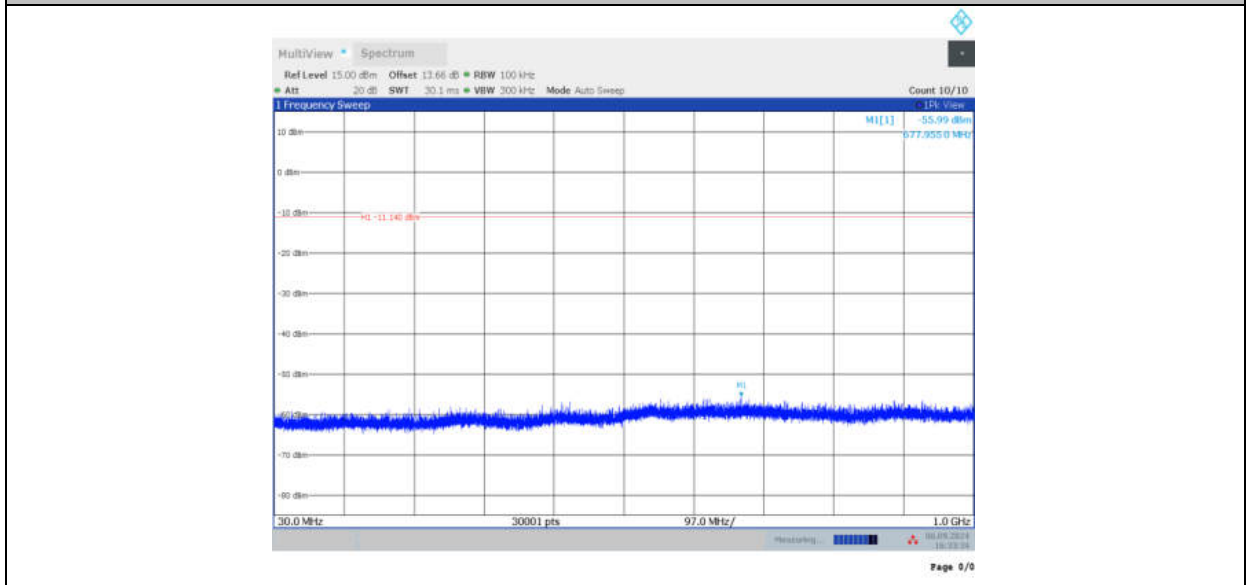


11B-CDD\_Ant7\_2412\_1000~26500

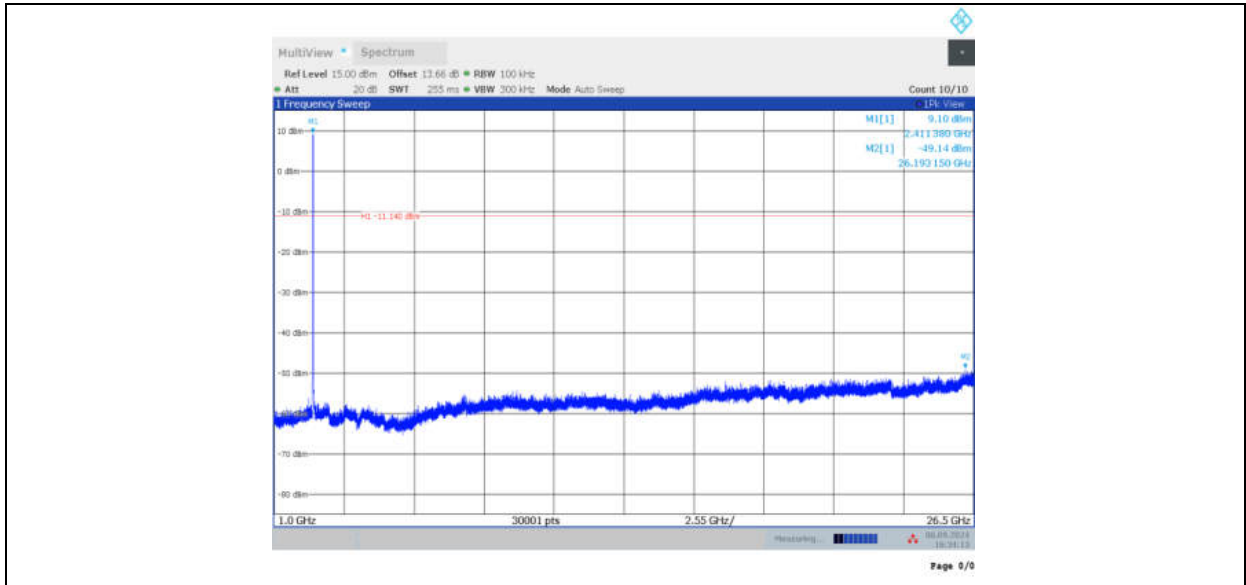


11B-CDD\_Ant12\_2437\_0~Reference

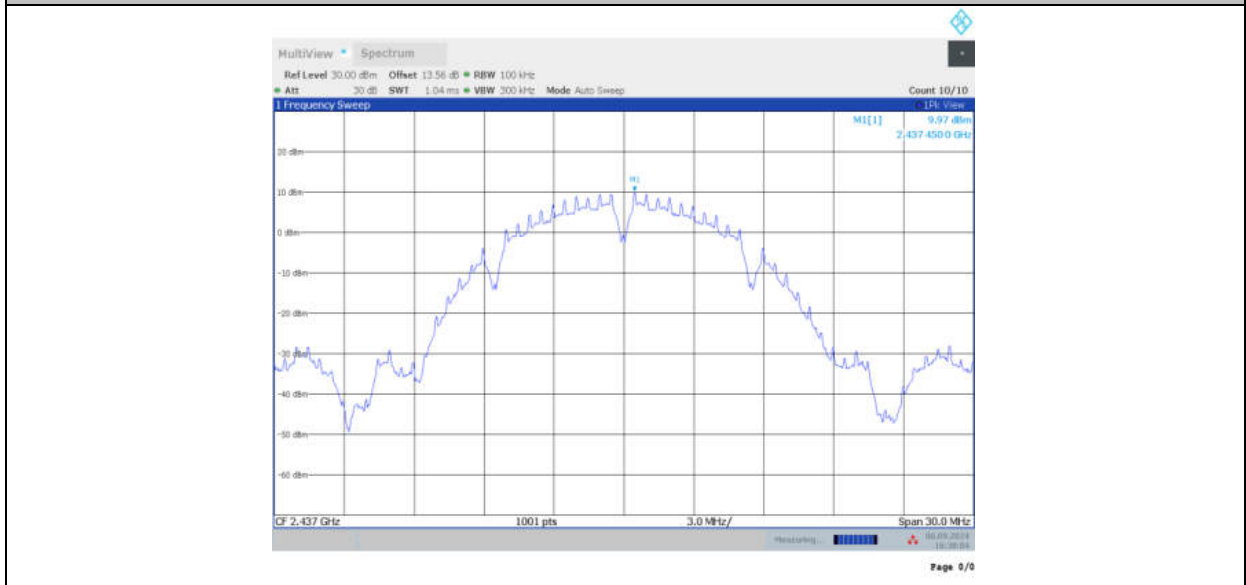

11B-CDD\_Ant12\_2437\_30~1000

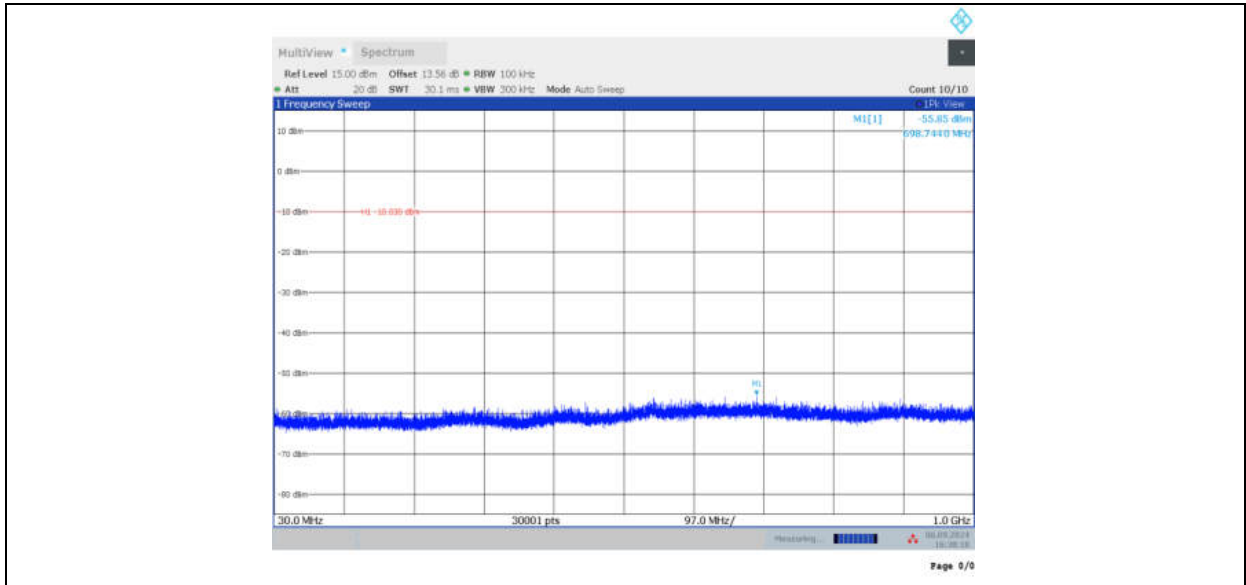


11B-CDD\_Ant12\_2437\_1000~26500

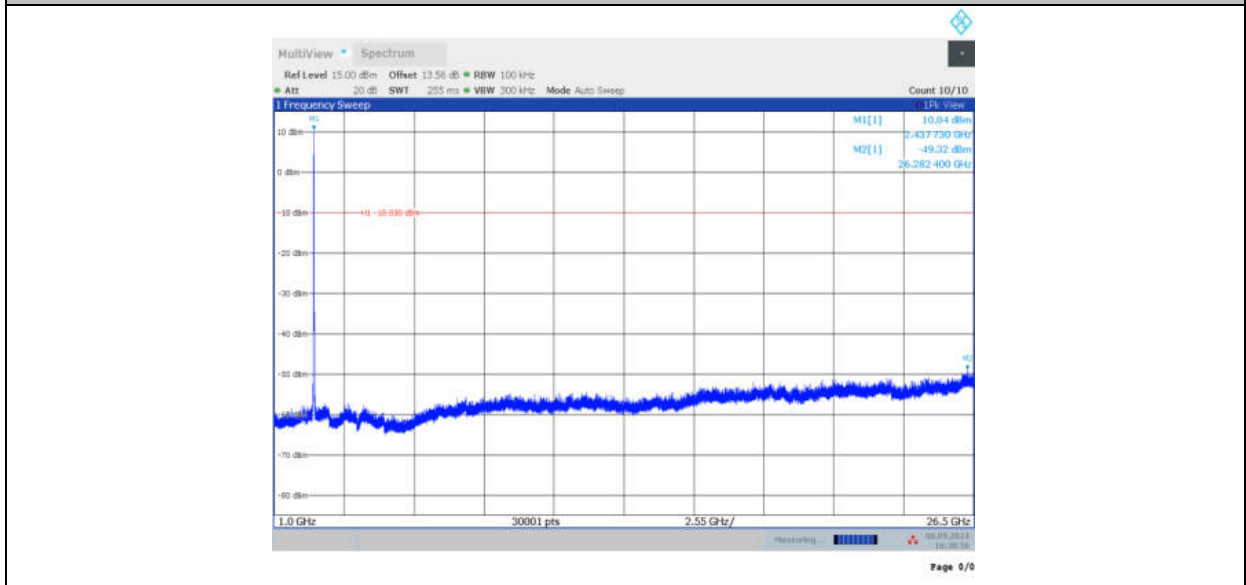


11B-CDD\_Ant7\_2437\_0~Reference




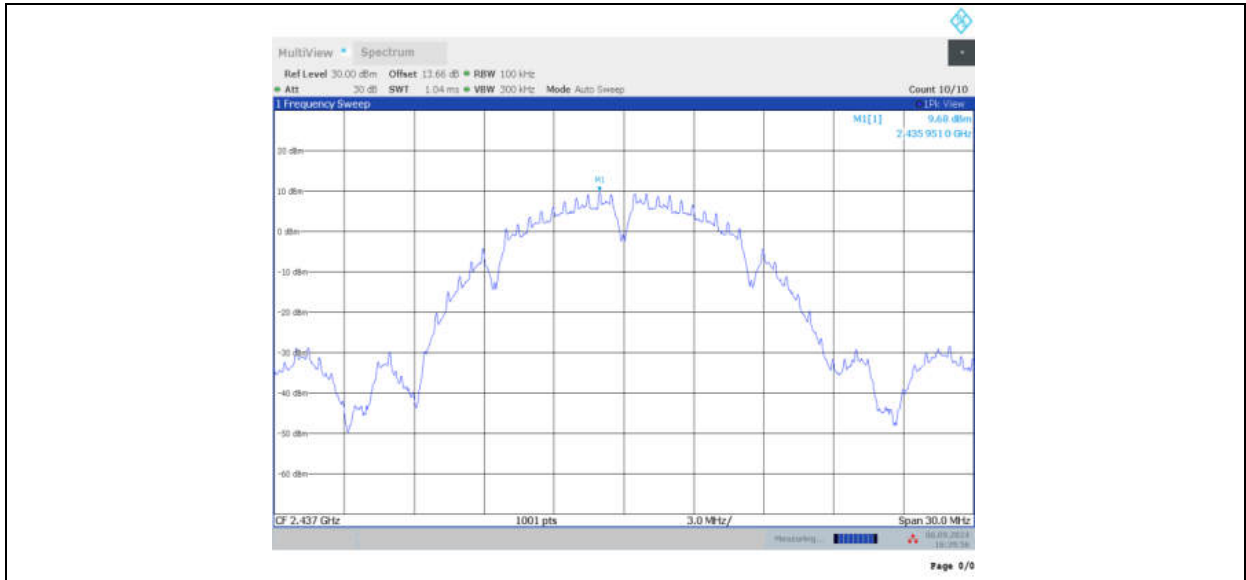


11B-CDD\_Ant7\_2437\_30~1000

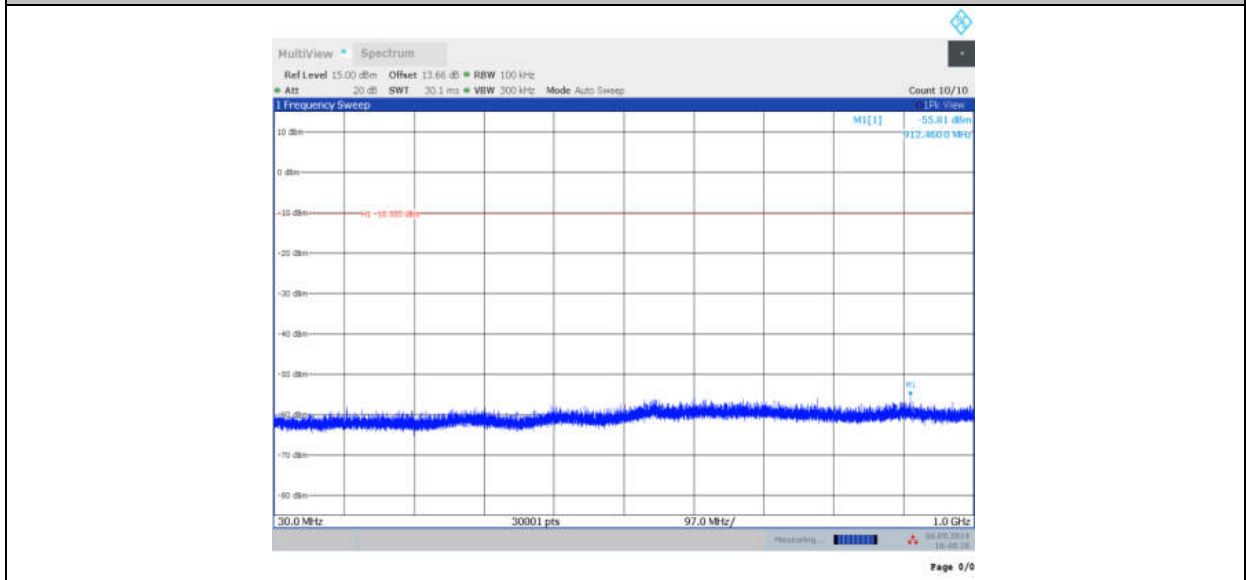


11B-CDD\_Ant7\_2437\_1000~26500

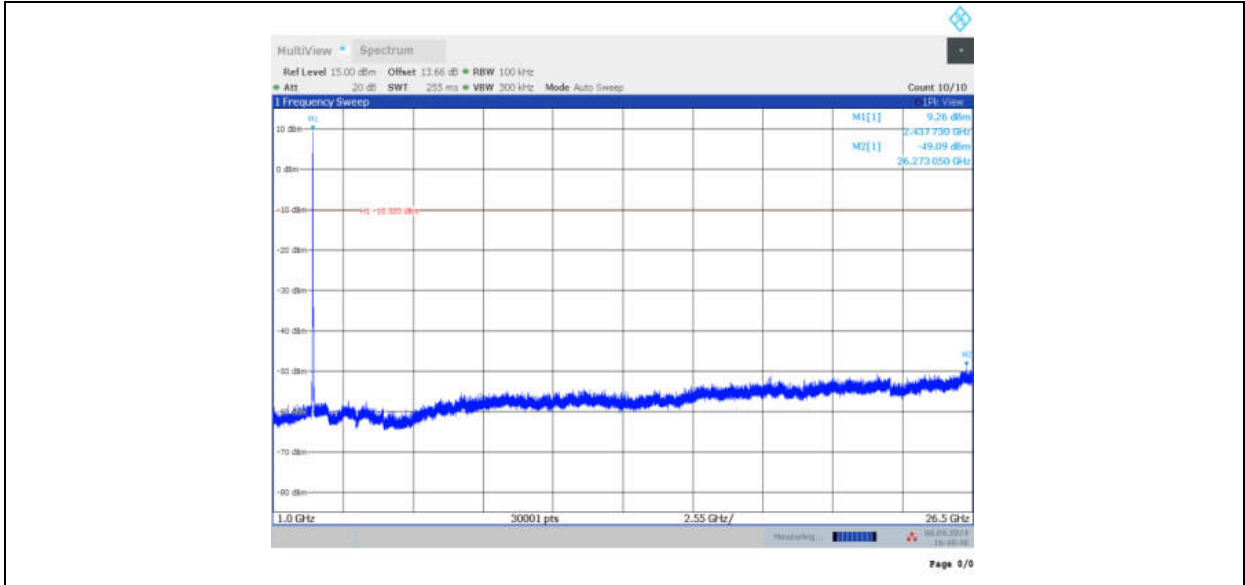


11B-CDD\_Ant12\_2462\_0~Reference

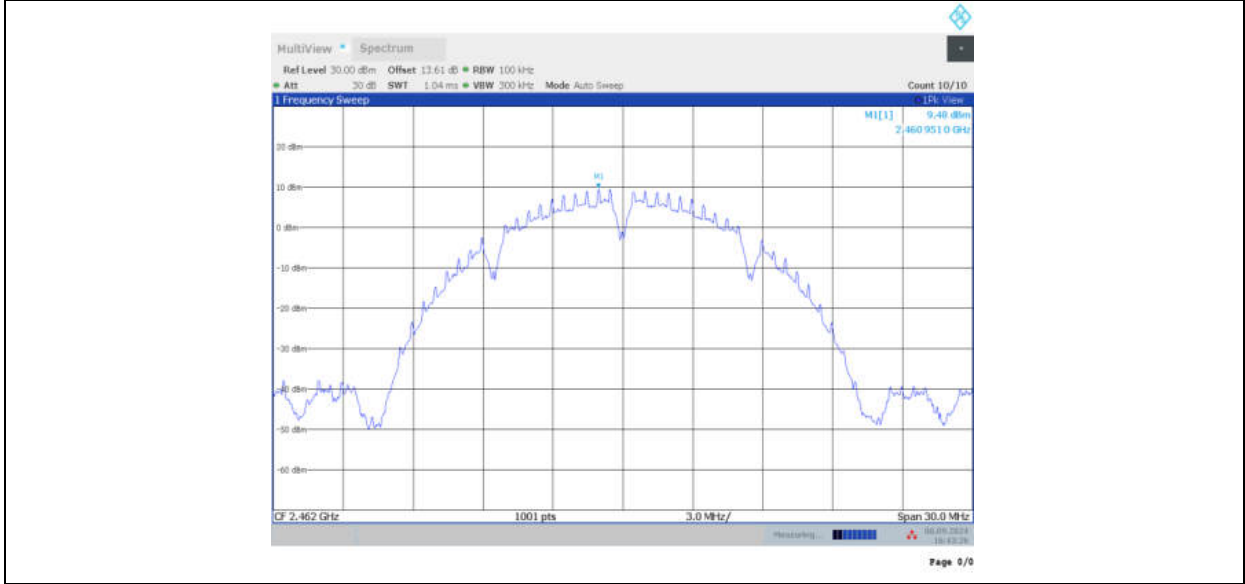


11B-CDD\_Ant12\_2462\_30~1000

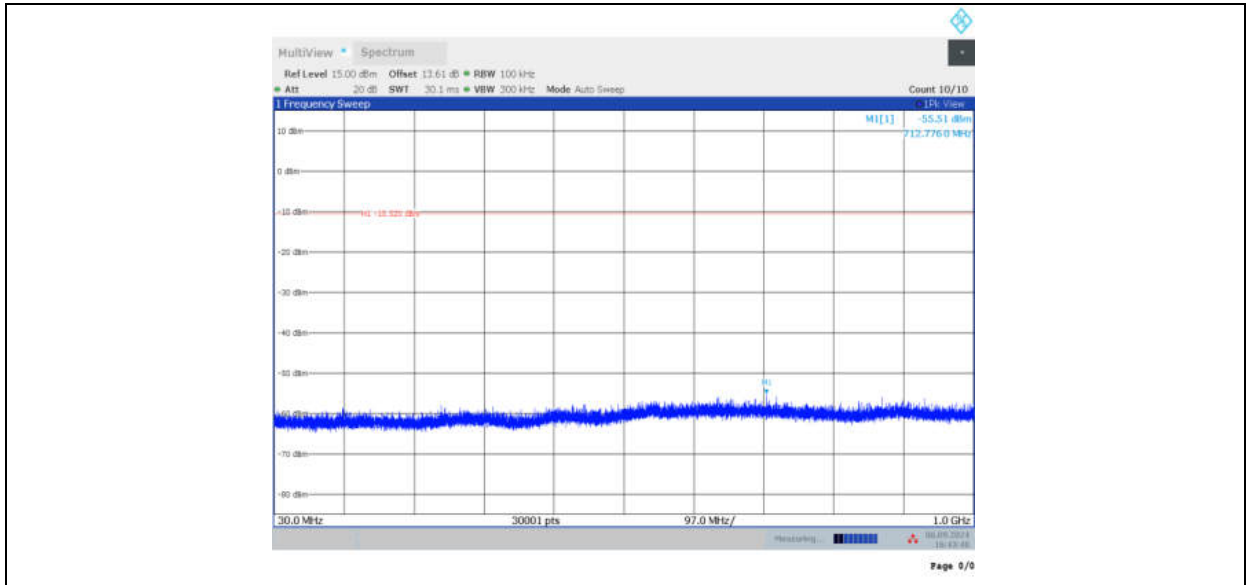


11B-CDD\_Ant12\_2462\_1000~26500

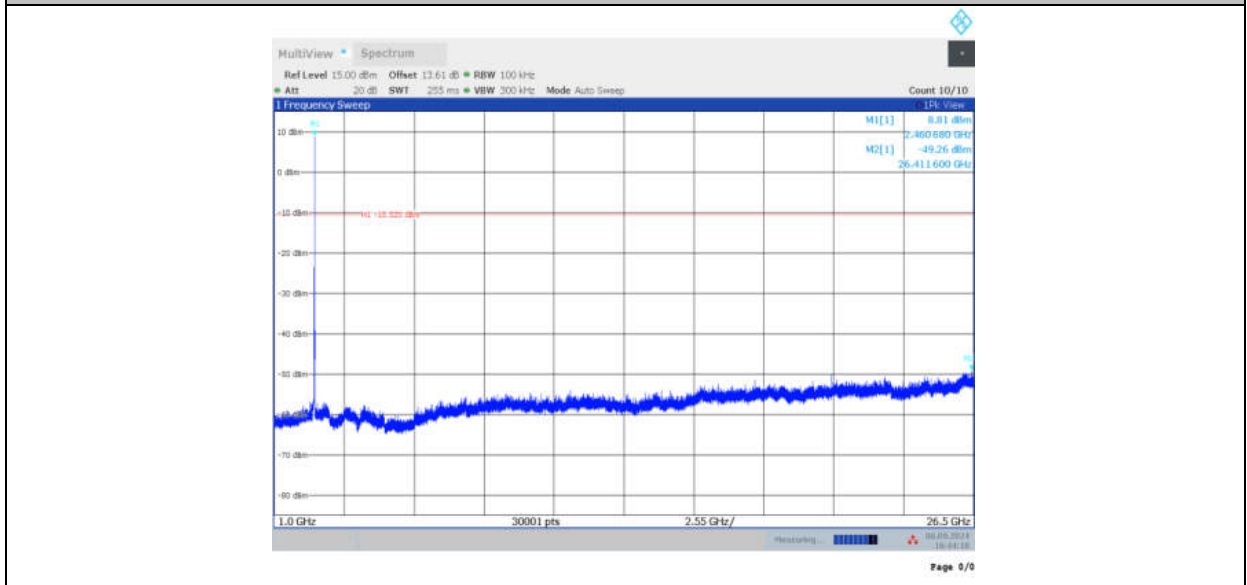


11B-CDD\_Ant7\_2462\_0~Reference

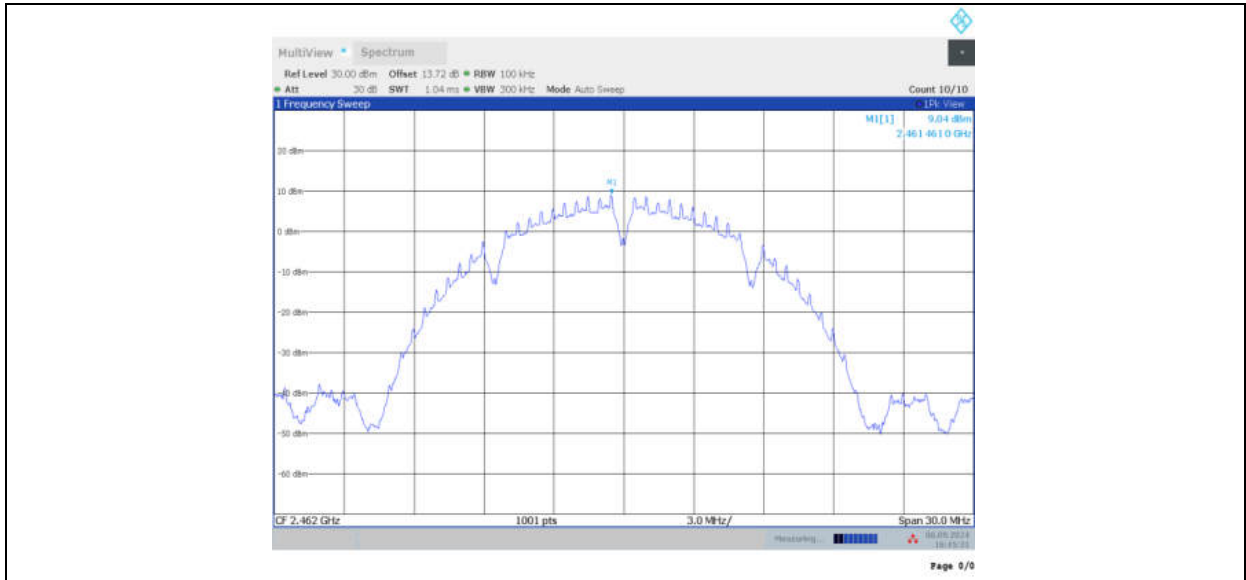


11B-CDD\_Ant7\_2462\_30~1000

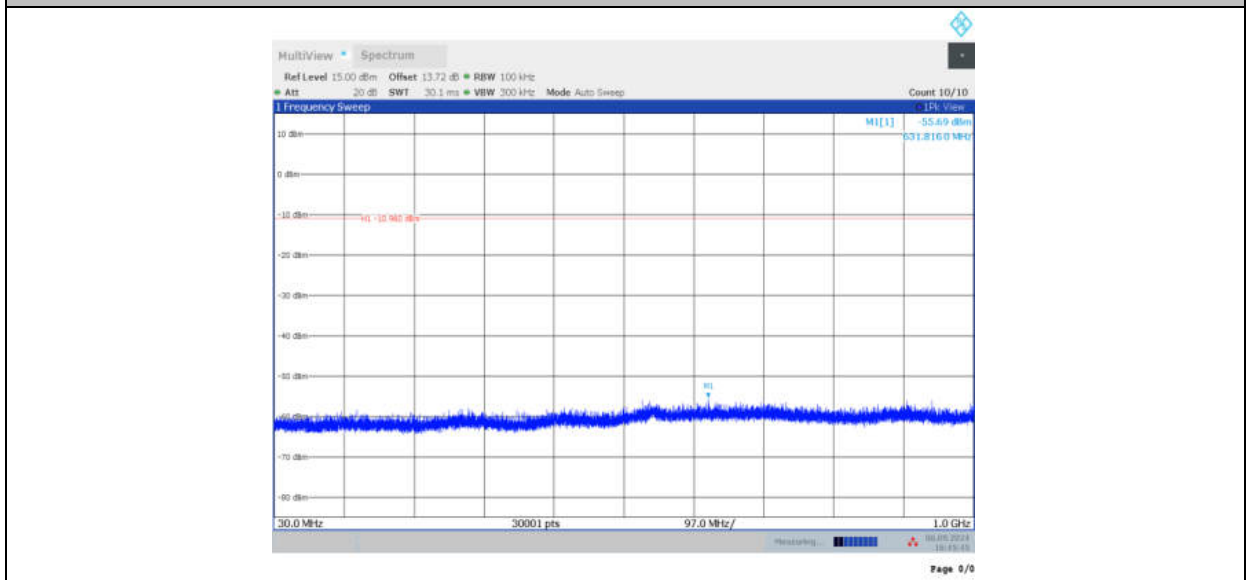


11B-CDD\_Ant7\_2462\_1000~26500

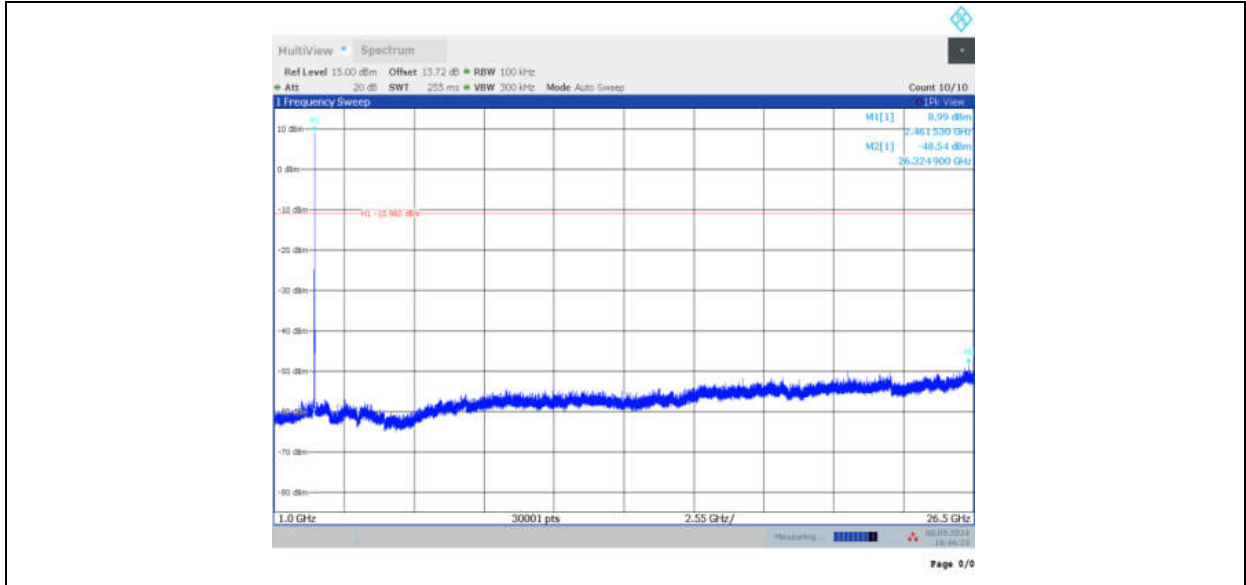


11G-CDD\_Ant12\_2412\_0~Reference

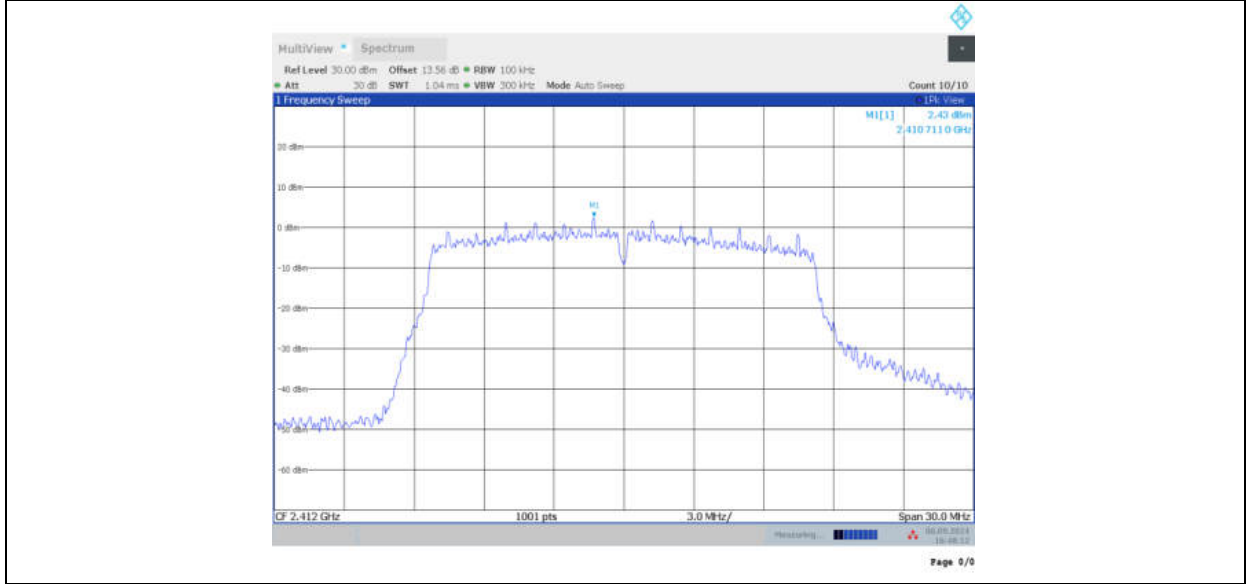

11G-CDD\_Ant12\_2412\_30~1000

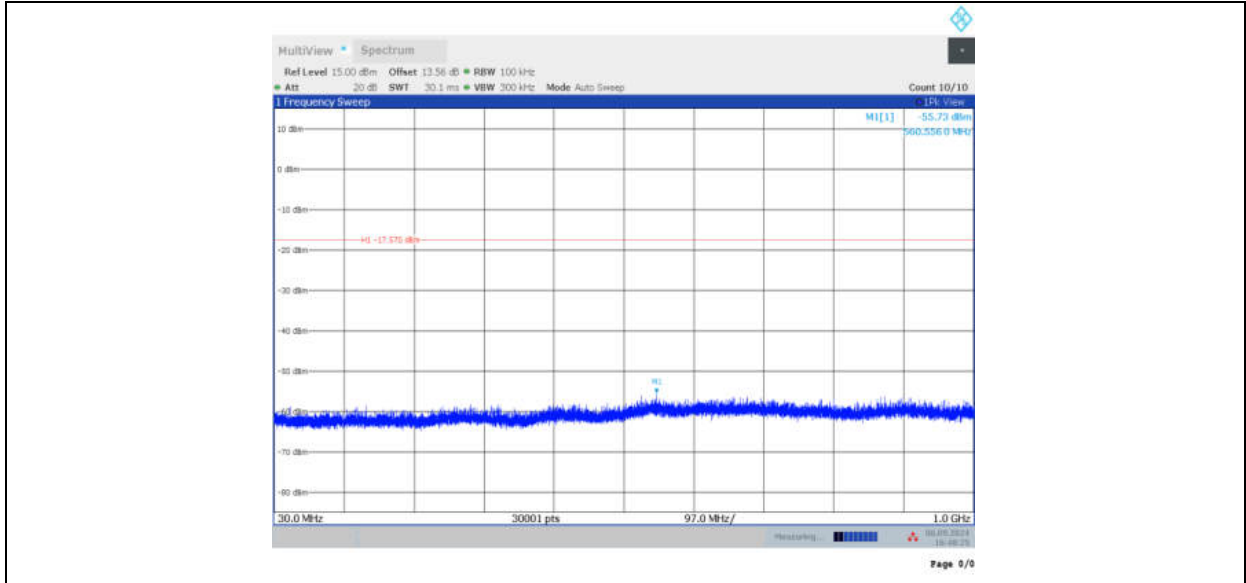

11G-CDD\_Ant12\_2412\_1000~26500

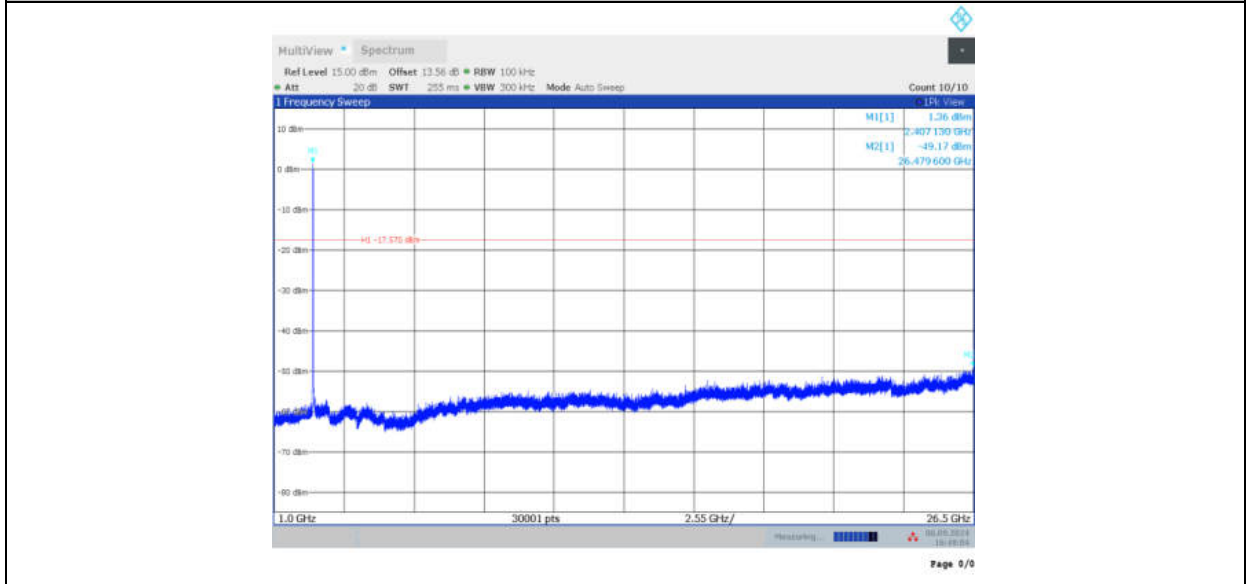

11G-CDD\_Ant7\_2412\_0~Reference