

# CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-0    Telefax: - 9075

Test report No.: 2-3474-01-01/03

This test report consists of 114 pages

Page 1 (114)

Recognized by the  
Federal Communications Commission  
**Anechoic chamber registration no.: 90462 (FCC)**  
**Anechoic chamber registration no.: 3463 (IC)**  
**TCB ID: DE 0001**



Accredited by the  
German Accreditation Council  
**DAR-Registration Number**  
**TTI-P-G 081/94-D0**



Independent ETSI  
compliance test house



**Accredited Bluetooth™ Test Facility (BQTF)**

**Test report no.: 2\_3474-01-01/03**

**Alcatel - One Touch 332a**

**FCC Part 24/22**

**FCC Part 15 see appendix**

**FCC ID: RAD003**

## Table of Contents

### 1 General information

#### 1.1 Notes

#### 1.2 Testing laboratory

#### 1.3 Details of applicant

#### 1.4 Application details

#### 1.5 Test item

#### 1.6 Test standards

### 2 Technical test

#### 2.1 Summary of test results

#### 2.2 Test report

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

### 1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : info@ict.cetecom.de

Internet : www.cetecom-ict.de

### Accredited testing laboratory

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

**DAR registration number: TTI-P-G-081/94-D0**

Listed by : Federal Communications Commission (FCC)

Identification/Registration No : 90462

**Accredited Bluetooth™ Test Facility (BQTF)**

*BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM*

### 1.3 Details of applicant

Name : Alcatel Business System  
Mobile Phones Business Unit

Street : 32 avenue Kléber

City : 92707 Colombes

Country : France

Telephone : +33-155-66-3220

Telefax : +33-155-66-6402

Contact : Jean Fleuriot

Telephone : +33-155-66-3220

e-mail : jean.fleuriot@alcatel.fr

### 1.4 Application details

Date of receipt of application : 2004-01-10

---

Test report No.: 2-3474-01-01/03

Date: 2004.01.10

Page 4 (114)

---

Date of receipt of test item : 2004-01-10

Date of test : 2004-01-08 to 2004-01-13

**1.5 Test item**

Type of equipment : GSM/Dual band mobile phone 850/1900  
Type designation : One Touch 332a  
Manufacturer : applicant  
Street :  
City :  
Country :  
Serial numbers :  
IMEI : 001016.00.002020.1  
001016.00.002021.9

**Additional information:** :  
Frequency : 1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz  
Type of modulation : 300KGXW / 200KQ7W  
Number of channels : 300 (PCS1900) and 125 (PCS850)  
Antenna : Integral antenna  
Power supply : 3,7V DC Li-Polymer Battery  
Output power GSM 850 : cond.: 33.2 dBm Peak, ERP: 24.3 dBm (Burst);  
EIRP: 26.45 dBm (Burst)  
Output power GSM 1900 : cond : 31.8 dBm Peak, ERP: 30.55 dBm (Burst);  
EIRP: 32.7 dBm (Burst)  
Type of equipment : Temperature range : -30°C - +60°C  
FCC – ID : RAD003  
Hardware : Status 01  
Software : Status 01

**TEST SET-UP 1:**

- ? HANDSET ONE TOUCH 332A
- ? Battery 3 DS 06641 AAAA Supplier Sony
- ? Single range charger 3DS 09371 AGAA: 100-127V (Leader E.)
- ? Headset 3DS 07855 AAAA supplier Merry

**1.6 Test standards: FCC Part 24, 22  
FCC Part 15**

## 2 Technical test

For Part 24/22 we use the substitution method ( TIA/EIA 603).

All measurements in this report were performed in GSM circuit - switched mode in both bands 850 and 1900 MHz. The handset does not offer GPRS or multislot service.

### Remarks:

#### Test setup:

The radiated measurements were performed with an AC/DC charging unit

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### FINAL VERDICT: PASS

#### Technical responsibility for area of testing :

2004-01-13                      RSC 8431    Gillmann

Date

Section

Name

Signature

#### Technical responsibility for area of testing :

2004-01-13                      RSC8412    Hausknecht D.

Date

Section

Name

Signature

**2.2 Test report**

**TEST REPORT**

**Test report no. : 2-3474-01-01/03**

## TEST REPORT REFERENCE

## LIST OF MEASUREMENTS

PARAMETER TO BE MEASURED	PAGE
<b><u>PART PCS 1900</u></b>	
POWER OUTPUT	SUBCLAUSE § 24.232 9
FREQUENCY STABILITY	SUBCLAUSE § 24.235 12
AFC FREQ ERROR VS. VOLTAGE	13
AFC FREQ ERROR VS. TEMPERATURE	13
EMISSIONS LIMITS	SUBCLAUSE §24.238 15
RECEIVER SPURIOUS RADIATION	SUBCLAUSE § 15.109 27
CONDUCTED SPURIOUS EMISSIONS	32
BLOCK EDGE COMPLIANCE FOR BLOCK A AND C	41
OCCUPIED BANDWIDTH	SUBCLAUSE §2.989 43
CONDUCTED EMISSIONS	SUBCLAUSE § 15.107/207 48
<b><u>PART PCS 850</u></b>	
POWER OUTPUT	SUBCLAUSE § 22.913 52
FREQUENCY STABILITY	SUBCLAUSE § 22.355 55
AFC FREQ ERROR VS. VOLTAGE	56
AFC FREQ ERROR VS. TEMPERATURE	56
EMISSIONS LIMITS	SUBCLAUSE §22.917 58
RECEIVER SPURIOUS RADIATION	SUBCLAUSE § 15.109 70
CONDUCTED SPURIOUS EMISSIONS	75
BLOCK EDGE REQUIREMENTS	84
OCCUPIED BANDWIDTH	SUBCLAUSE §2.989 86
EMISSION LIMITATIONS FOR CELLULAR	SUBCLAUSE §22.917(F) 93
CONDUCTED EMISSIONS	SUBCLAUSE § 15.107/207 98
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	103
TEST SITE	106



## PART PCS 1900

### POWER OUTPUT

### SUBCLAUSE § 24.232

#### Summary:

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 ( peak and average)

This measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range)

#### Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	? 2

#### Power Measurements:

#### Conducted:

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average in the burst Output Power (dBm)
1850.2	0	31.8	31.7
1880.0	0	31.0	30.9
1909.8	0	31.2	31.1
Measurement uncertainty		? 0.5 dB	

#### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

## EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

## Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m test site (listed with FCC, IC).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (f) Set the EMI Receiver and #2 as follows:
  - Center Frequency: test frequency
  - Resolution BW: 100 kHz
  - Video BW: same
  - Detector Mode: positive
  - Average: off
  - Span: 3 x the signal bandwidth
- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

## Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:
  - Center Frequency : equal to the signal source
  - Resolution BW : 10 kHz
  - Video BW : same
  - Detector Mode : positive
  - Average : off
  - Span : 3 x the signal bandwidth
- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (c) Select the frequency and E-field levels for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):  
.DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

## REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- (n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:  
 $P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$   
 $EIRP = P + G1 = P3 + L2 - L1 + A + G1$   
 $ERP = EIRP - 2.15 \text{ dB}$   
 Total Correction factor in EMI Receiver # 2 =  $L2 - L1 + G1$   
 Where: P: Actual RF Power fed into the substitution antenna port after corrected.  
 P1: Power output from the signal generator  
 P2: Power measured at attenuator A input  
 P3: Power reading on the Average Power Meter  
 EIRP: EIRP after correction  
 ERP: ERP after correction
- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
- (p) Repeat step (d) to (o) for different test frequency
- (q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- (r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

### Limits:

Power Step	Burst PEAK EIRP (dBm)
0	<33

### Power Measurements ( Radiated )

Frequency (MHz)	Power Step	BURST PEAK EIRP (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	32.3	30.15	26.3	24.15
1880.0	0	32.7	30.55	26.7	24.55
1909.8	0	32.4	30.25	26.4	24.25
Measurement uncertainty		? 3 dB			

### Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result			
MHz	dBμV	dBm	dB	dBd	dB	dBm			
1880.0	131.0	21.0	8.4	0.0	3.33	32.7			

$$EIRP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$$

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

## FREQUENCY STABILITY

## SUBCLAUSE § 24.235

### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.8 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 12 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V dc Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.



**AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	29	0.0000154	0.0154
3.4	27	0.0000143	0.0143
3.5	21	0.0000127	0.0127
3.6	22	0.0000117	0.0117
3.7	26	0.0000138	0.0138
3.8	29	0.0000154	0.0154
3.9	34	0.0000180	0.0180
4.0	22	0.0000117	0.0117
4.1	27	0.0000143	0.0143
4.2	34	0.0000180	0.0180
4.3	33	0.0000175	0.0175
4.4	30	0.0000159	0.0159

**AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-22	- 0.0000117	- 0.0117
-20	-10	- 0.0000053	- 0.0053
-10	31	0.0000164	0.0164
? 0.0	49	0.0000260	0.0260
+10	38	0.0000202	0.0202
+20	26	0.0000138	0.0138
+30	14	0.0000074	0.0074
+40	28	0.0000148	0.0148
+50	24	0.0000127	0.0127
+60	30	0.0000159	0.0159

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
 (for reference numbers see test equipment listing)

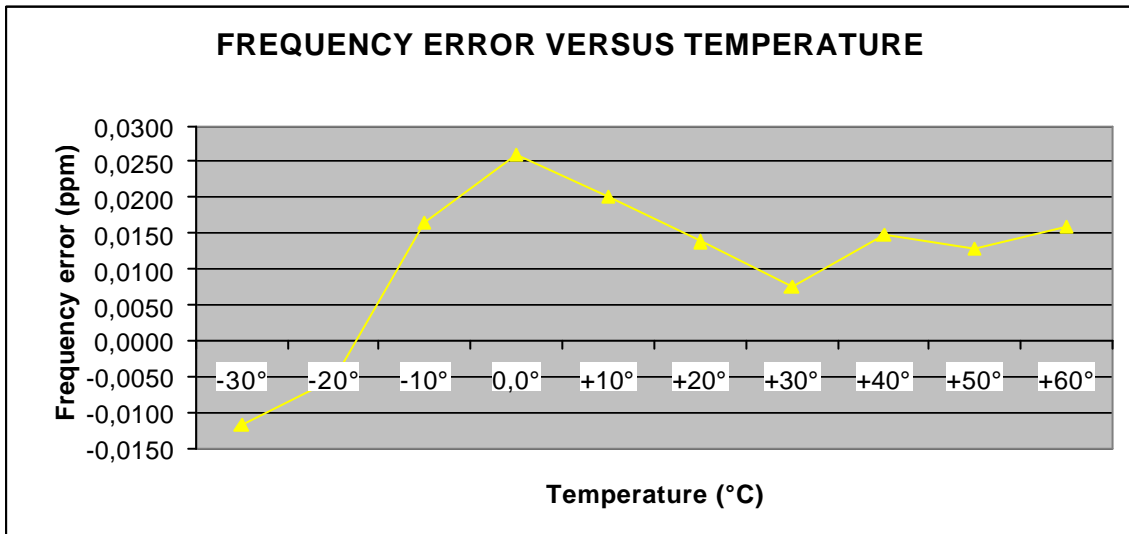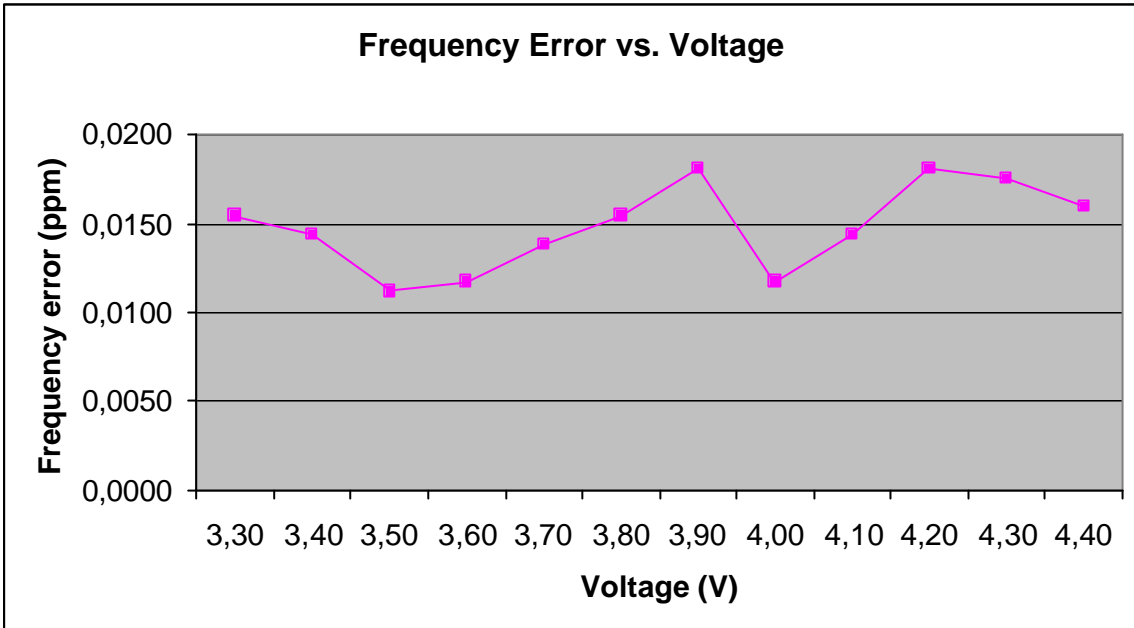

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

## EMISSIONS LIMITS

§24.238

### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

**The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:**

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

### Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

**All measurements were done in horizontal and vertical polarization, the plots show the worst case.**

**As can be seen from this data, the emissions from the test item were within the specification limit.**

### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
<b>CH 512</b>					
1850.2		31.8	-13.0 (44.8 dBc)	-	carrier
-		-		-	-
-		-		-	-
<b>CH 661</b>					
1880.0		31.0	-13.0 (44.0 dBc)	-	carrier
-		-		-	-
-		-		-	-
<b>CH 810</b>					
1909.8		31.2	-13.0 (44.2 dBc)	-	carrier
				-	-
				-	-
Measurement uncertainty		± 0.5dB			

### Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result			
MHz	dBμV	dBm	dBi	dBd	dB	DBm			
1880.0	128.5	26.7	8.4	0.0	3.33	31.8			

$$EIRP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$$

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)



## Part 15.209 Magnetics

Traffic Mode - Valid for all 3 channels (9 kHz up to 30 MHz)

EUT: One touch 332a  
 Manufacturer: Alcatel  
 Operating Condition: Traffic mode  
 Test Site: Cetecom, Room 6  
 Operator: Gillmann  
 Comment: 115V / 60 Hz  
 Start of Test: 07.01.04 / 08:40:15

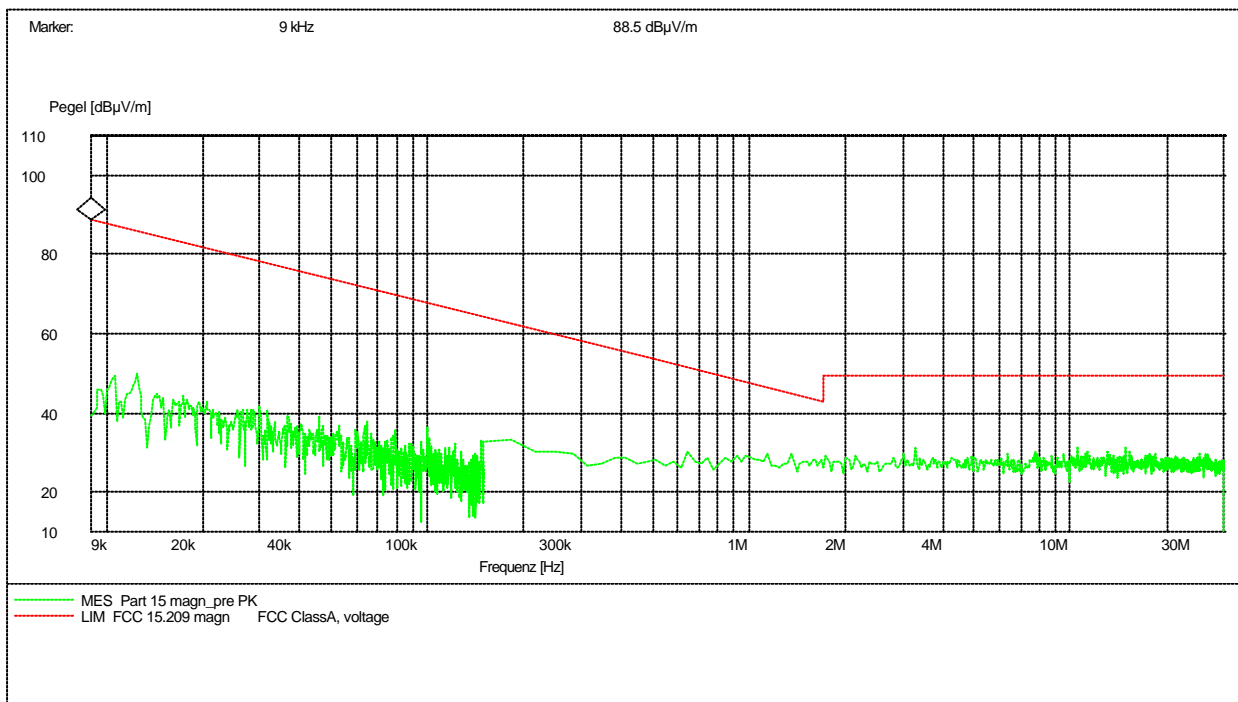

For peak measurement we use 100 kHz RBW/VBW

For CISPR QP measurement we use 200 Hz from 9 kHz to 150kHz

9 kHz from 150 kHz to 30 MHz

### Limits

### SUBCLAUSE § 15.109


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

## Channel 512 (up to 4 GHz)

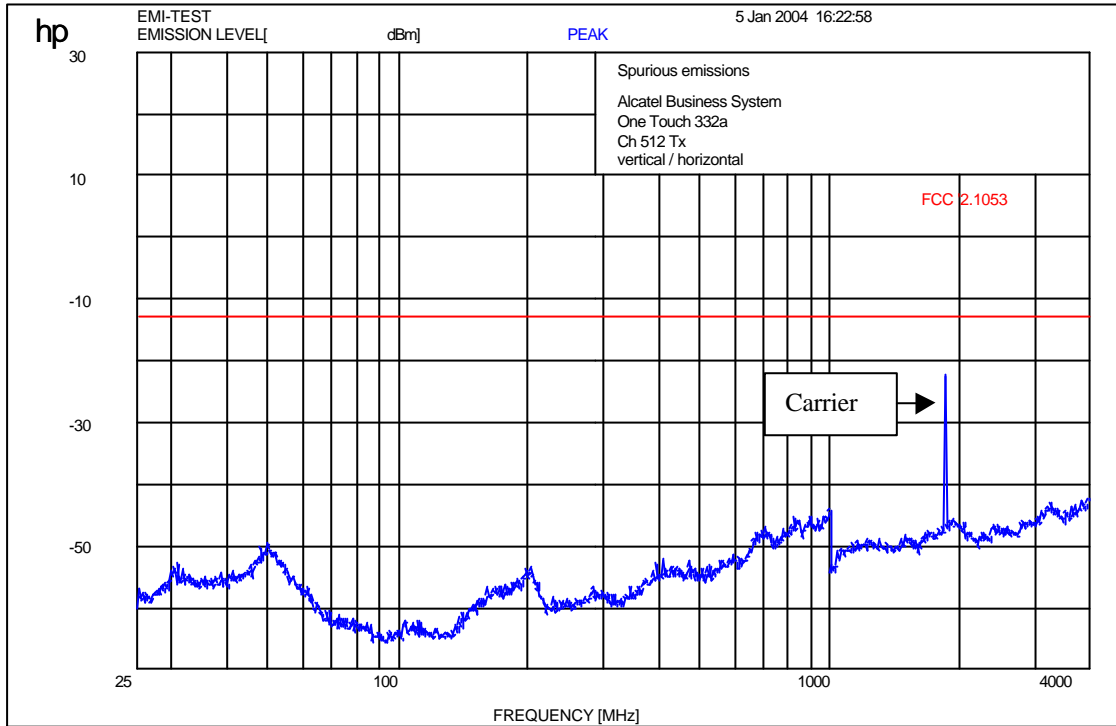

f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW / VBW 1 MHz


**Carrier suppressed with a rejection filter**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

## Channel 512 (up to 12 GHz)

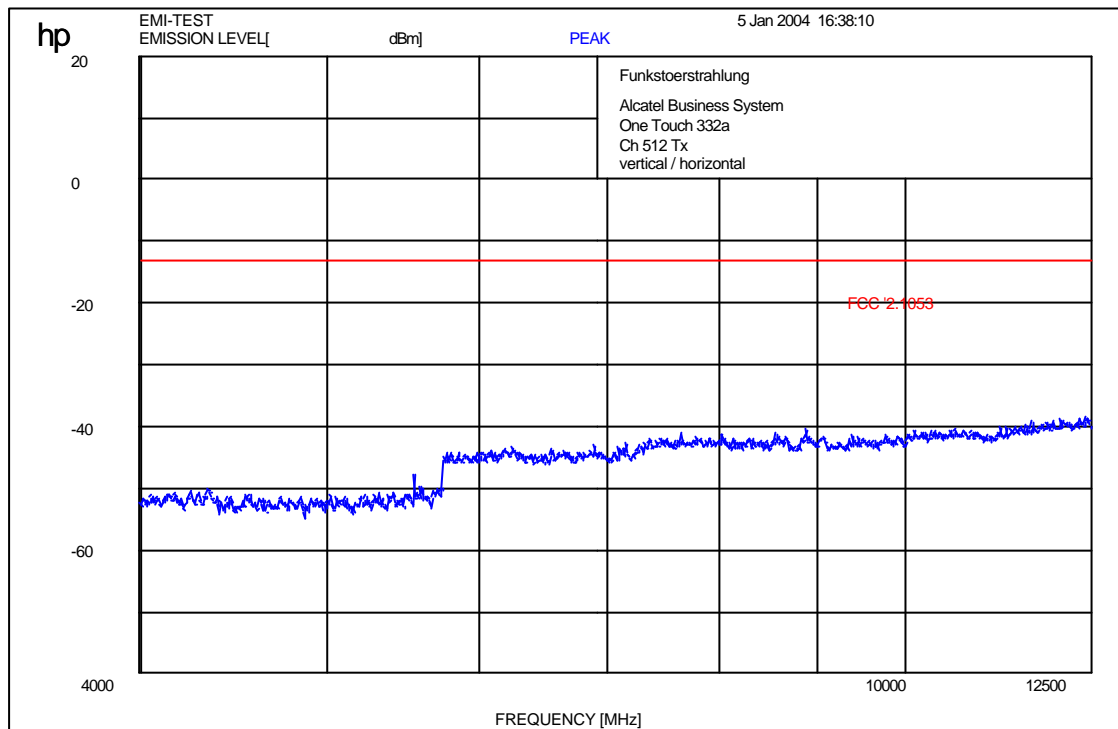

f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW / VBW 1 MHz


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64


## Channel 512 (up to 25 GHz)

	Ref Lvl	-37.86 dBm	RBW	1 MHz	RF Att	10 dB
	30 dBm	12.00000000 GHz	VBW	1 MHz	SWT	74 ms
			Unit		dBm	

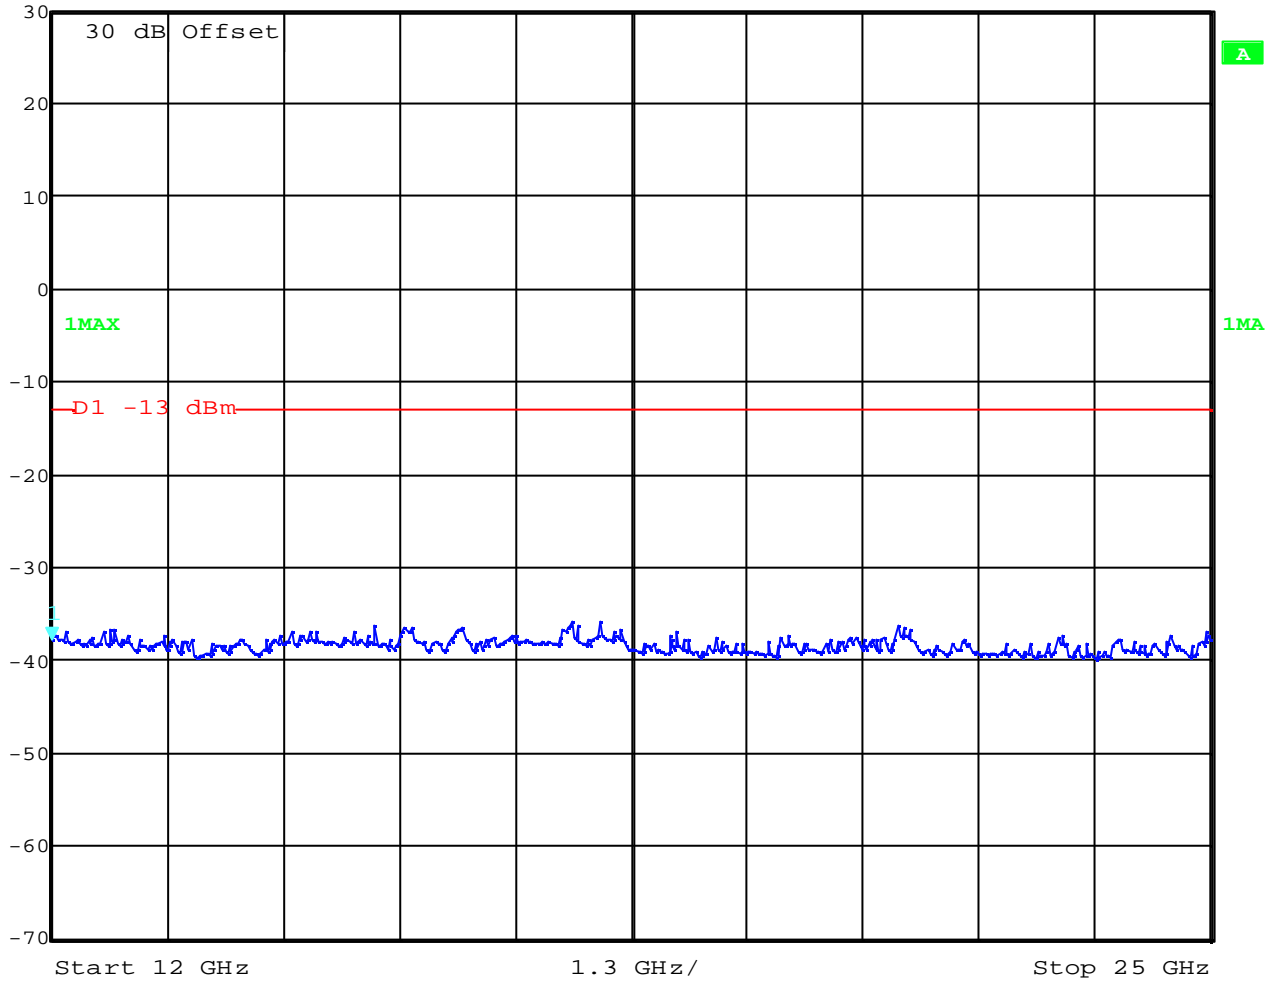

Date: 7.JAN.2004 14:13:22

Channel 661 (up to 4 GHz)

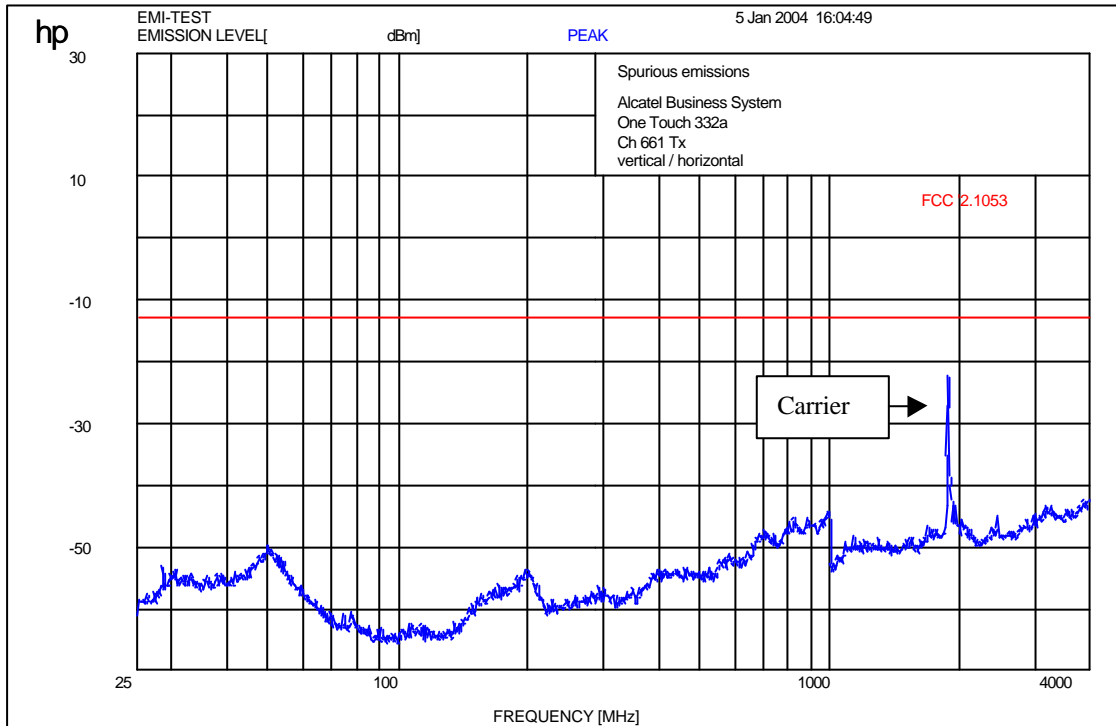

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


Carrier suppressed with a rejection filter.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

## Channel 661 (up to 12 GHz)

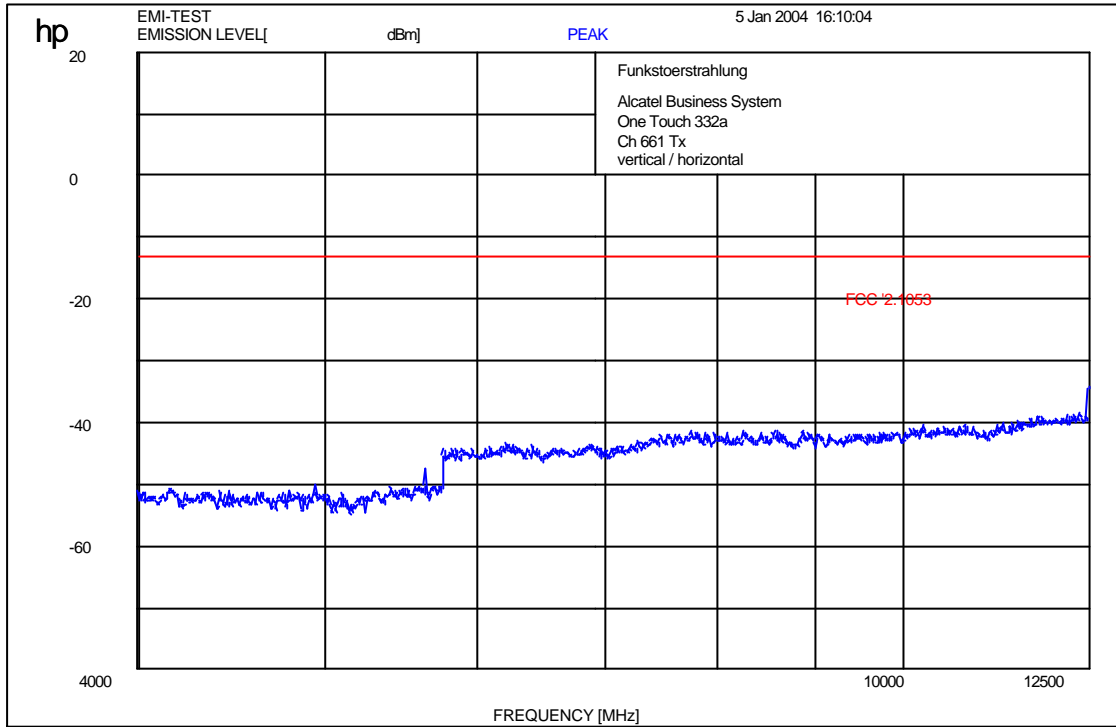

f < 1 GHz : RBW/VBW: 100 kHz

f ? 1GHz : RBW / VBW 1 MHz

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**


(for reference numbers see test equipment listing)

17 – 24, 64

## Channel 661 (up to 25 GHz)




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
30 dBm	-37.74 dBm	VBW	1 MHz		
	12.00000000 GHz	SWT	74 ms	Unit	dBm

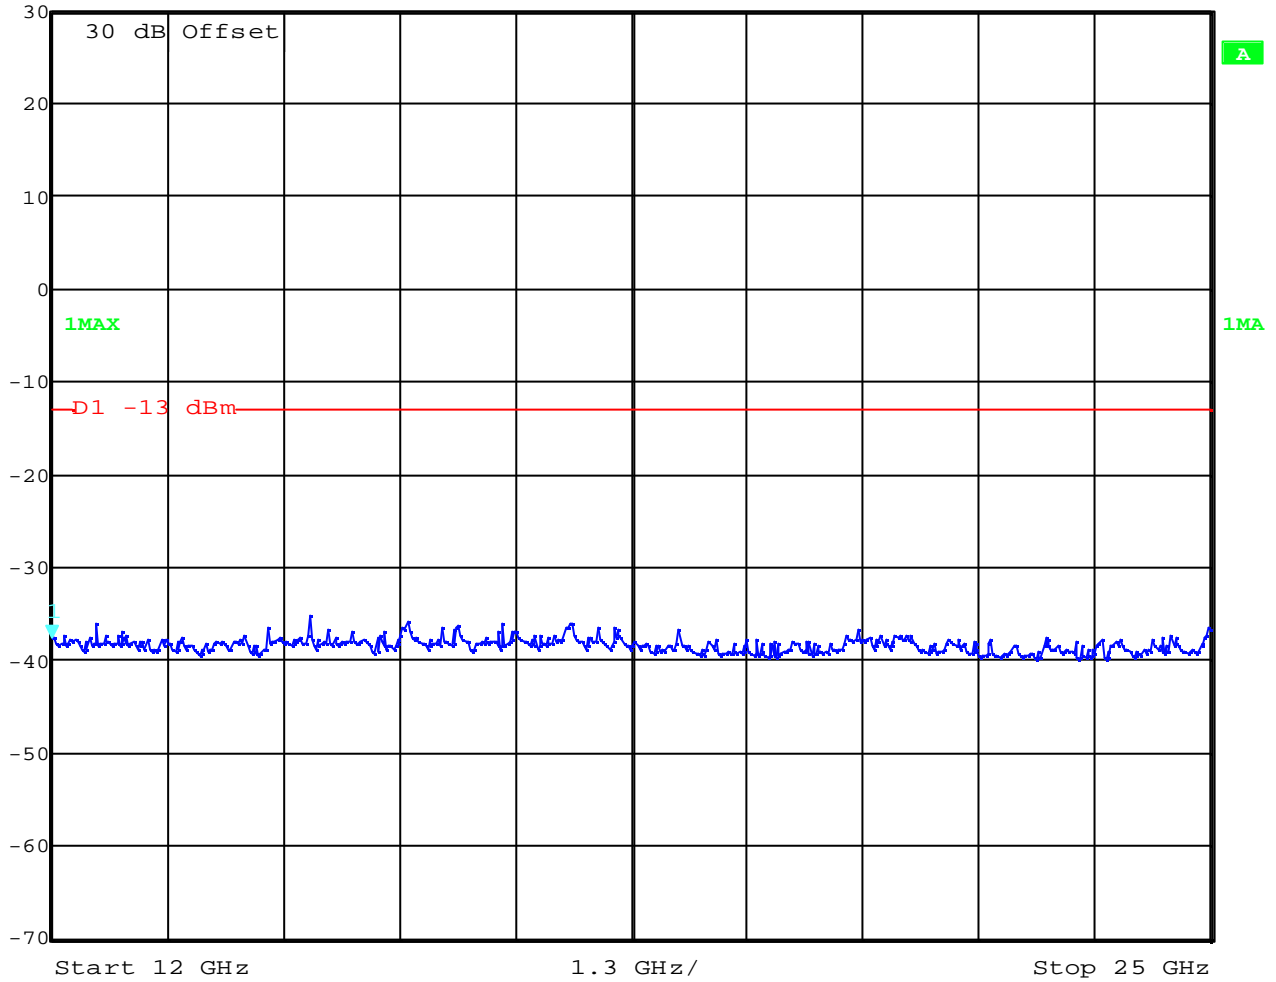

Date: 7.JAN.2004 14:12:11

Channel 810 (up to 4 GHz)

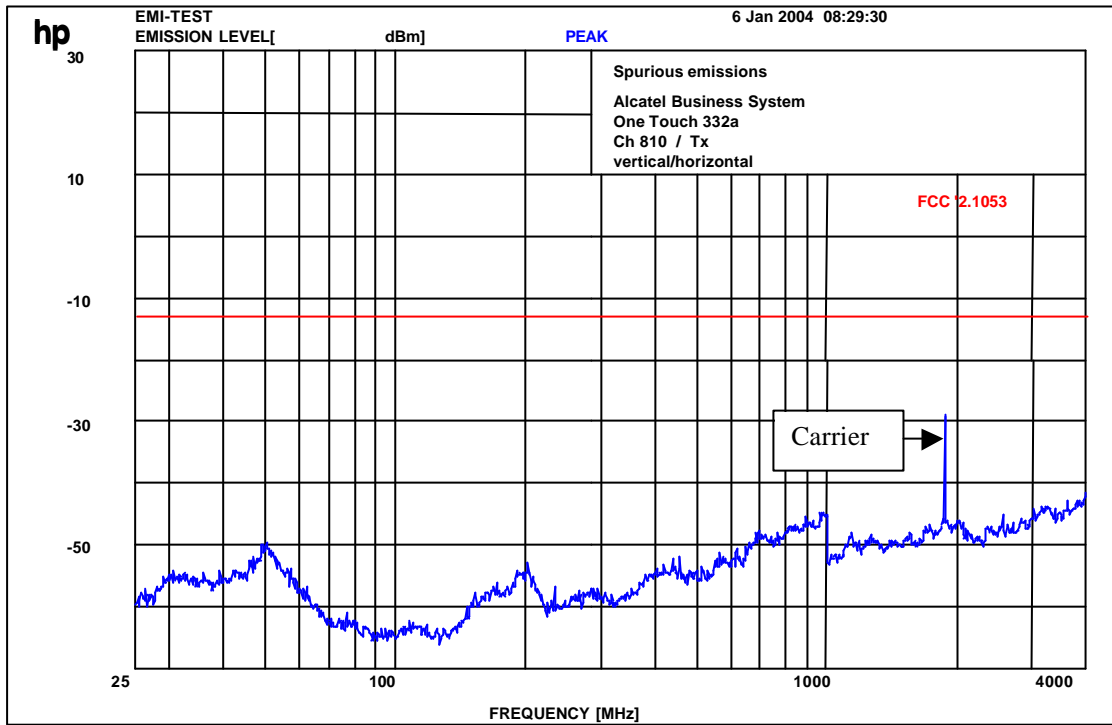

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

Carrier suppressed with a rejection filter


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64



## Channel 810 (up to 12 GHz)

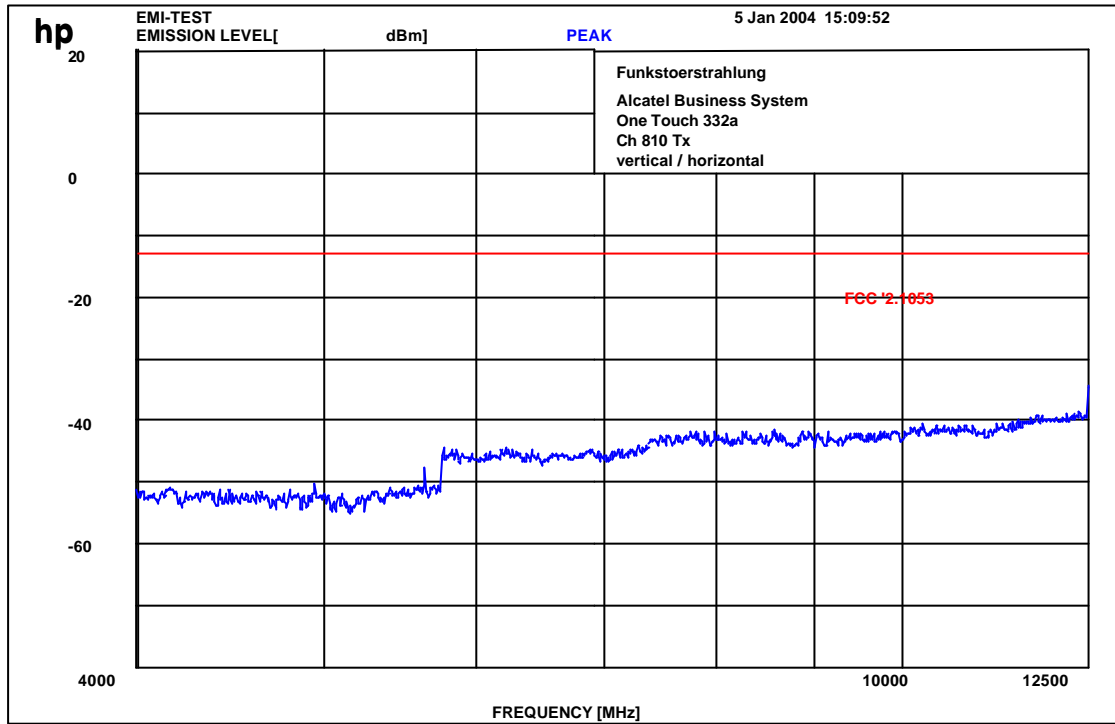

f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24, 64

## Channel 810 (up to 25 GHz)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
30 dBm	-37.98 dBm	VBW	1 MHz		
	12.00000000 GHz	SWT	74 ms	Unit	dBm

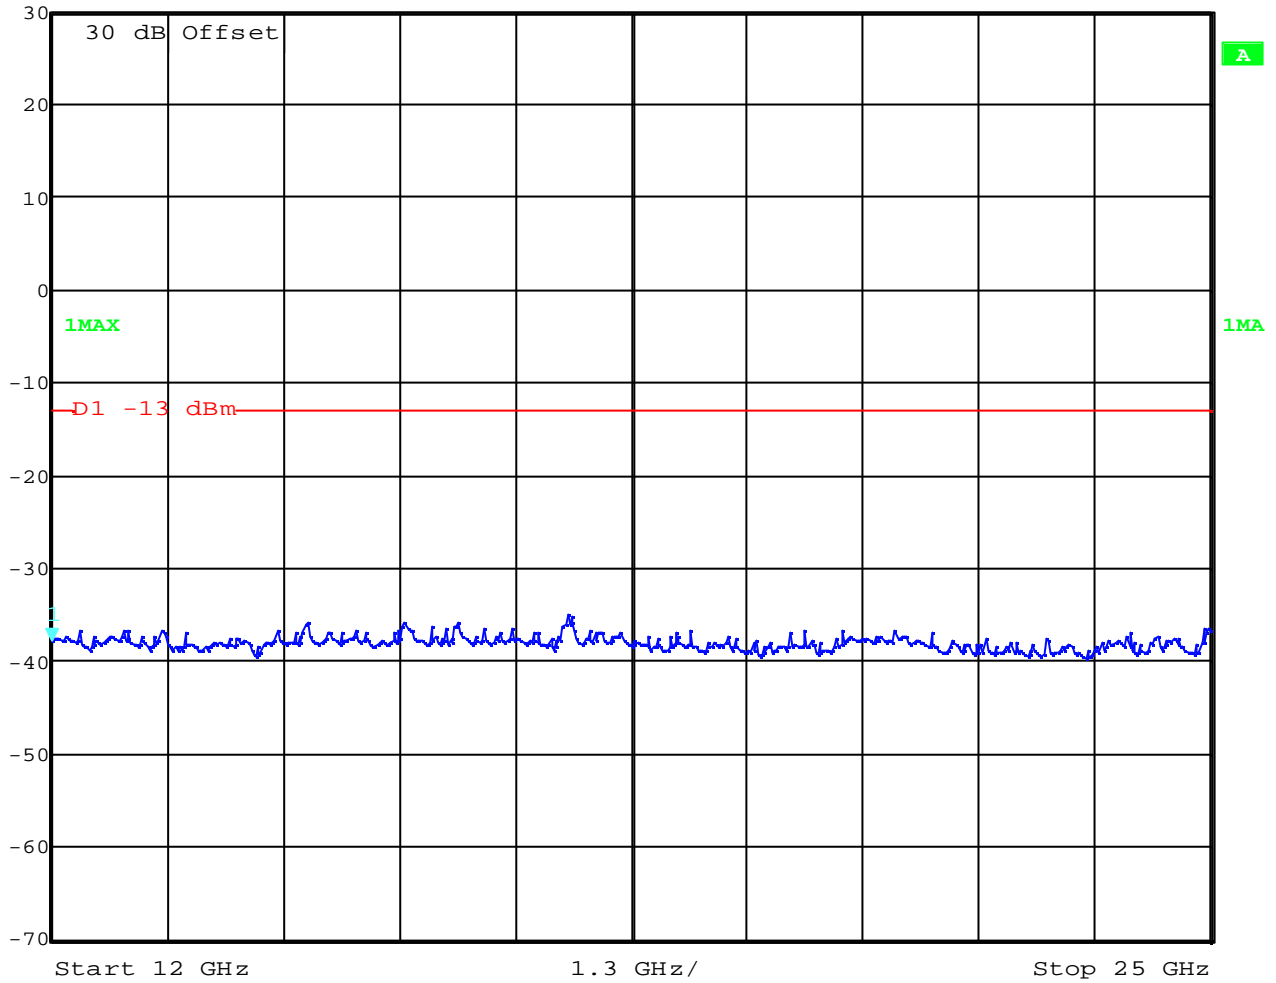


Date: 7.JAN.2004 14:10:09



## Part 15.209 Magnetics

### Idle Mode (9 kHz up to 30 MHz )

EUT: One touch 332a  
 Manufacturer: Alcatel  
 Operating Condition: Idle mode  
 Test Site: Cetecom, Room 6  
 Operator: Gillmann  
 Comment: 115V / 60 Hz  
 Start of Test: 07.01.04 / 08:44:32

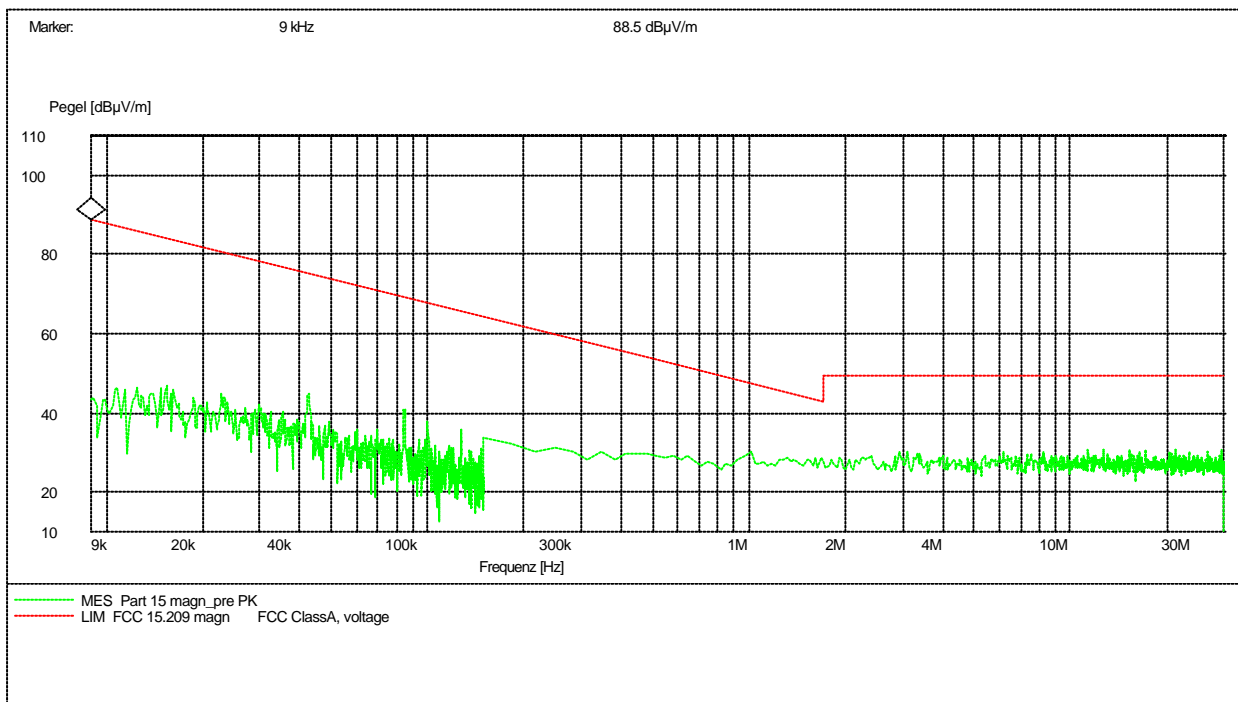

For peak measurement we use 100 kHz RBW/VBW

For CISPR QP measurement we use 200 Hz from 9 kHz to 150kHz

9 kHz from 150 kHz to 30 MHz

### Limits


### SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

## Idle-Mode (up to 4 GHz)

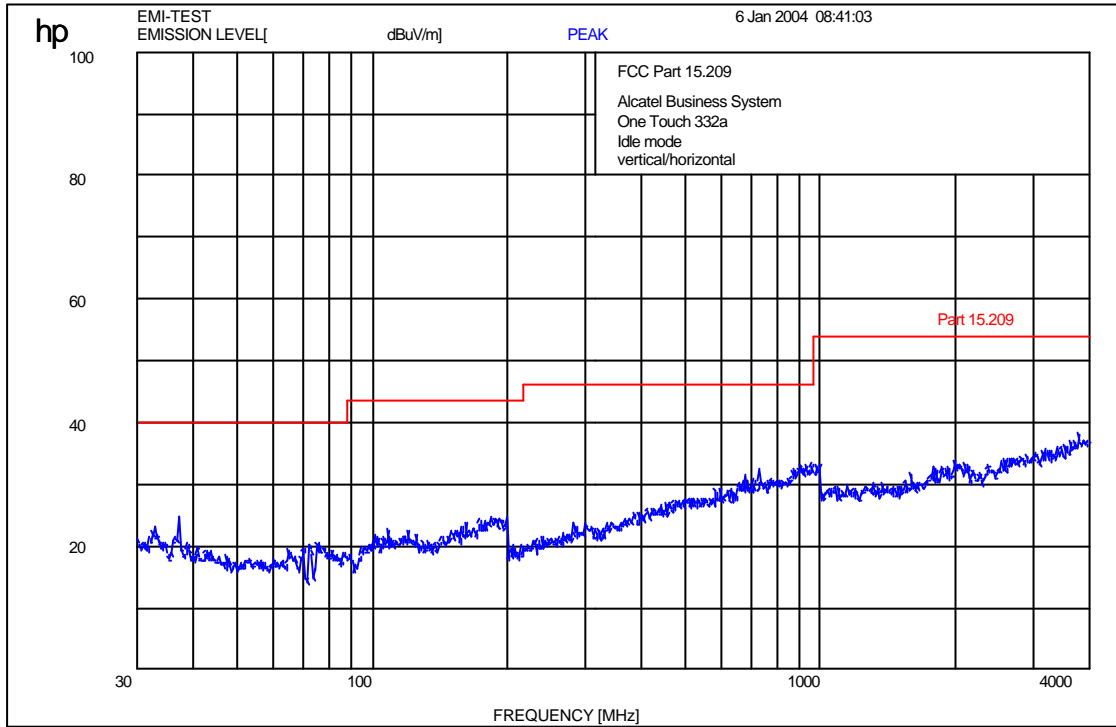

f < 1 GHz : RBW/VBW: 100 kHz


f ≥ 1GHz : RBW/VBW 1 MHz

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

**Idle-Mode (up to 12 GHz)**

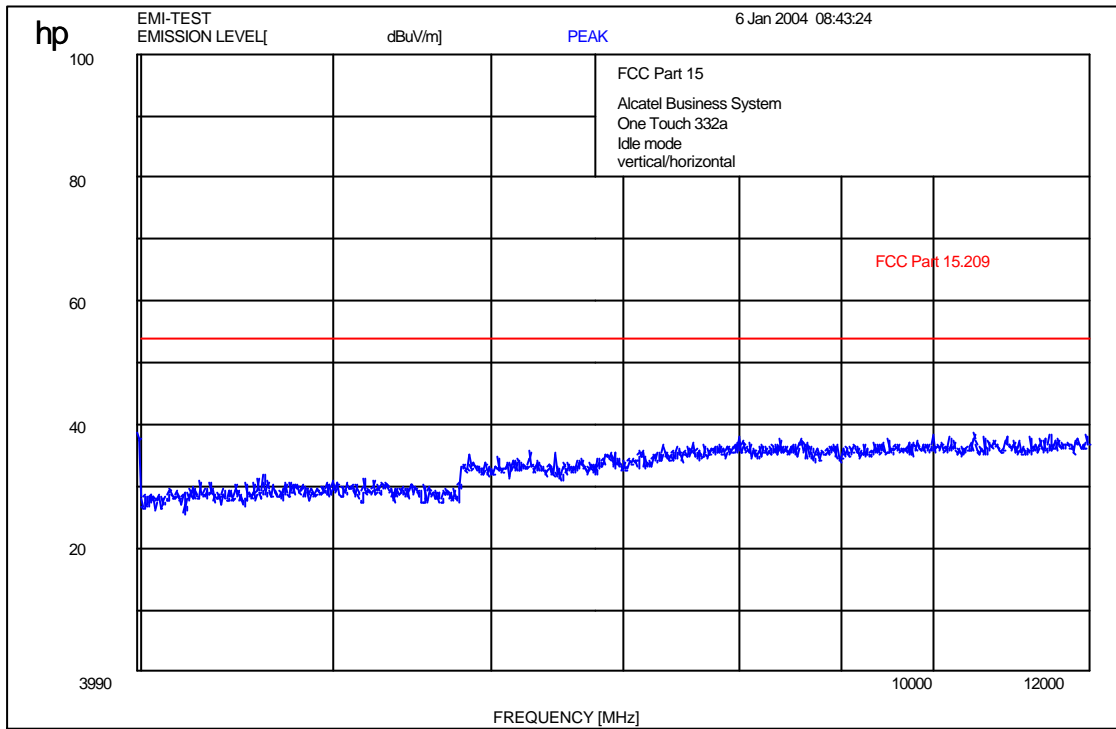

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW 1 MHz


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

## Idle-Mode (up to 25 GHz)

	Ref Lvl	34.79 dB $\mu$ V/m	RBW	1 MHz	RF Att	0 dB
	97 dB*	24.94789579 GHz	VBW	1 MHz	Mixer	-40 dBm
			SWT	74 ms	Unit	dB $\mu$ V/m

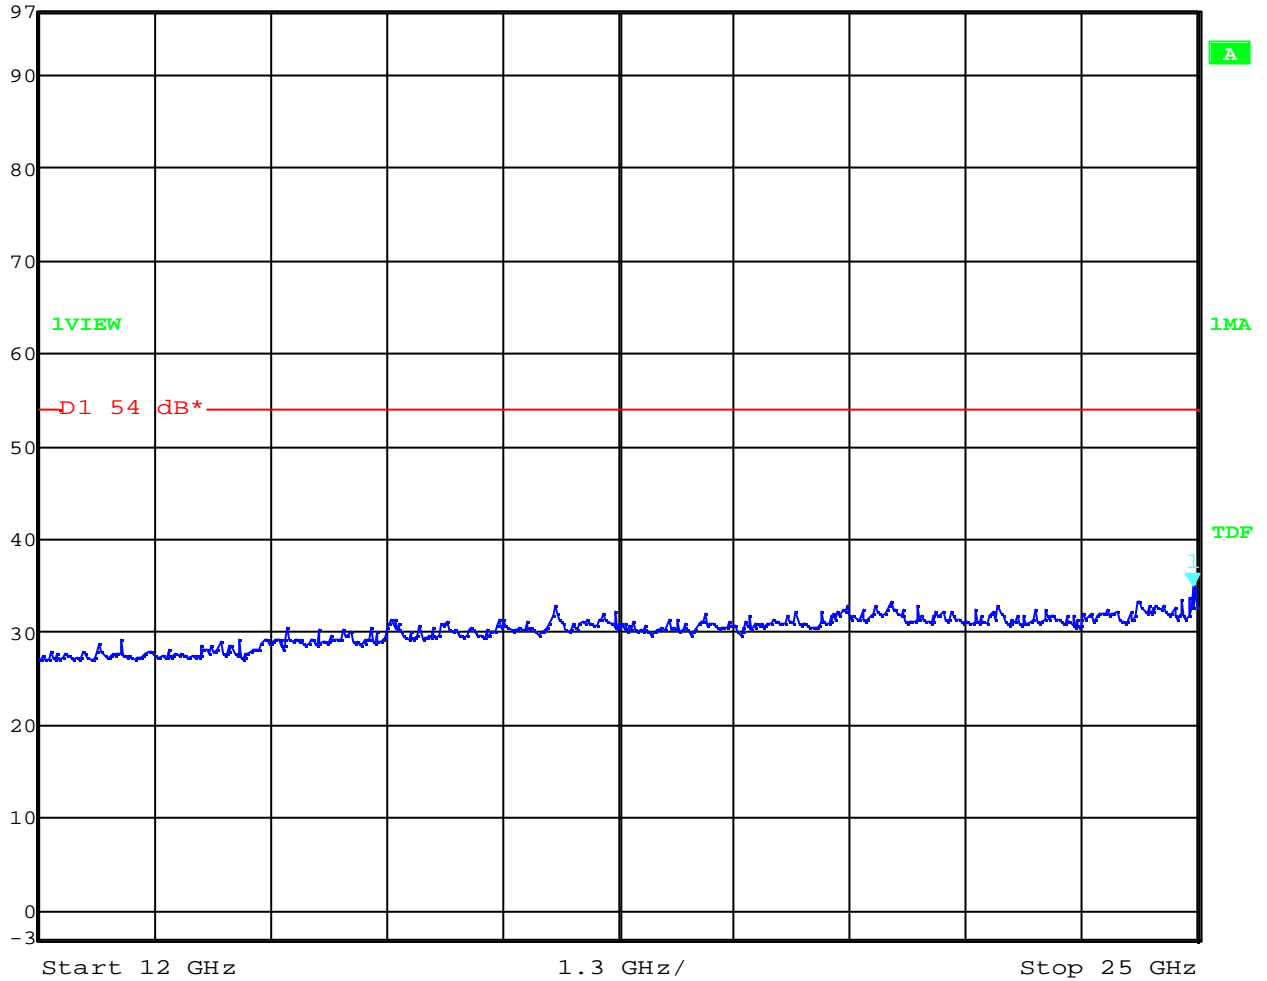

Date: 6.JAN.2004 08:09:38

**For this measurement we used a special wideband horn antenna and a low noise preamp.**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)  
 17 – 24, 64

**CONDUCTED SPURIOUS EMISSIONS**

**Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

**USPCS Transmitter**

**Channel Frequency**

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

**Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

<b>EMISSION LIMITATIONS</b>					
<b>f (MHz)</b>		<b>amplitude of emission (dBm)</b>	<b>limit max. allowed emission power (dBm)</b>	<b>actual attenuation below frequency of operation (dBc)</b>	<b>results</b>
<b>CH 512</b>					
<b>1 850.2</b>		<b>32.30</b>	<b>-13.0 (45.30 dBc)</b>		<b>carrier</b>
<b>1 850.0</b>		<b>- 13.57</b>		<b>45.87</b>	<b>carrier</b>
<b>6 581.0</b>		<b>- 32.12</b>		<b>64.42</b>	<b>complies</b>
-		-		-	
<b>CH 661</b>					
<b>1 880.0</b>		<b>32.70</b>	<b>-13.0 (45.70 dBc)</b>		<b>carrier</b>
<b>1 879.0</b>		<b>- 23.78</b>		<b>56.48</b>	<b>carrier</b>
<b>6 606.0</b>		<b>- 32.90</b>		<b>65.60</b>	<b>complies</b>
<b>CH 810</b>					
<b>1909.8</b>		<b>32.40</b>	<b>-13.0 (45.40 dBc)</b>		<b>carrier</b>
<b>1 908.8</b>		<b>- 23.60</b>		<b>56.00</b>	<b>carrier</b>
<b>1 910.0</b>		<b>- 16.17</b>		<b>48.57</b>	<b>carrier</b>
<b>6 584.0</b>		<b>- 32.90</b>		<b>65.30</b>	<b>complies</b>
<b>Measurement uncertainty</b>		<b>± 0.5dB</b>			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**


(for reference numbers see test equipment listing)



Measurements:

Channel: 512

	Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
	30 dBm	-31.37 dBm	VBW	100 kHz		
		1.8490000 GHz	SWT	470 ms	Unit	dBm

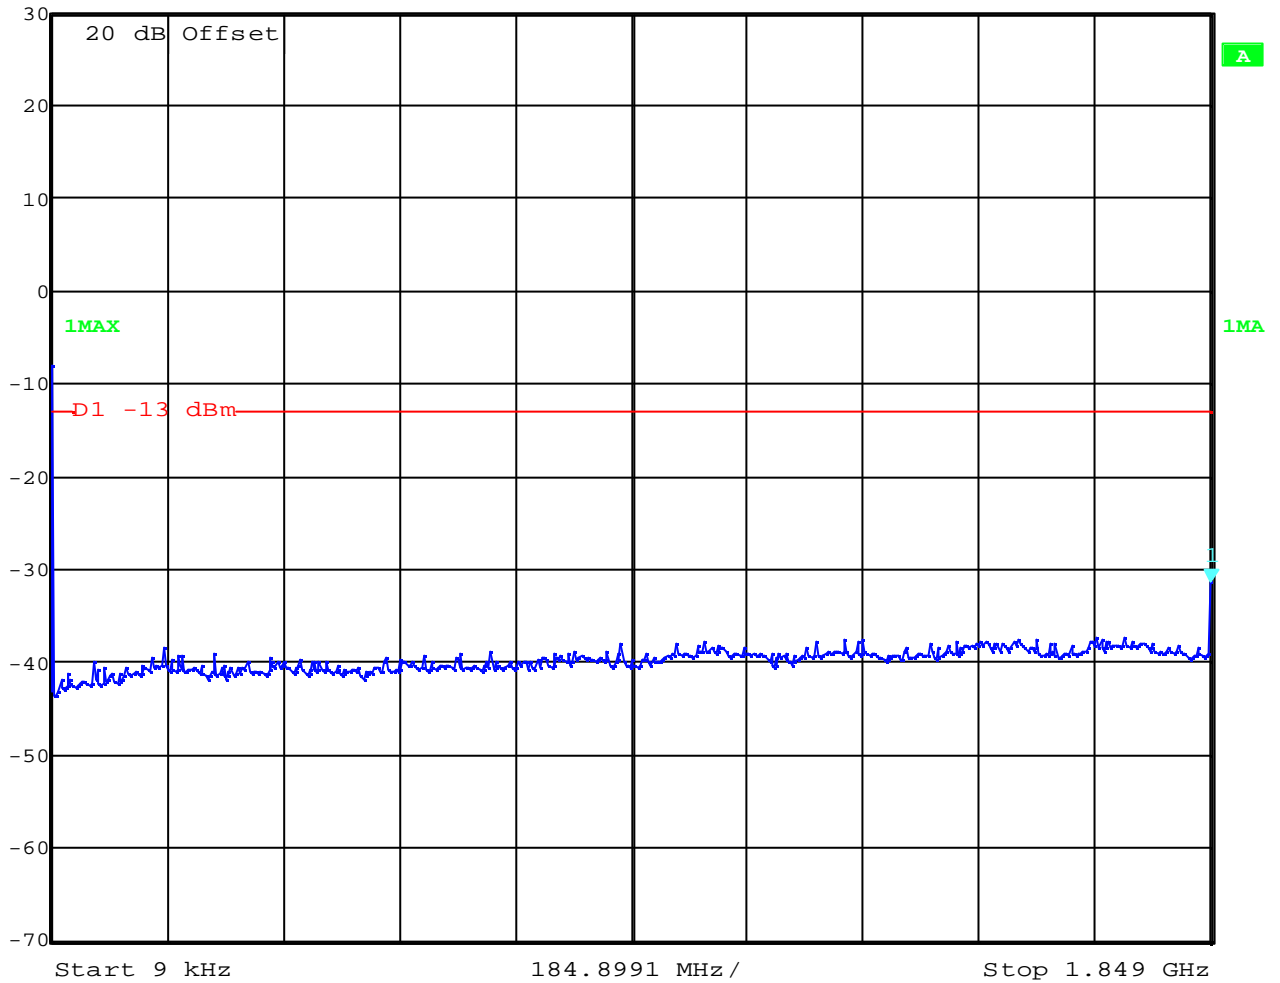


Date: 8.JAN.2004 07:09:32

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

## Channel 512

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	30 dB
	30 dBm	-13.57 dBm	VBW	3 kHz		
		1.85000000 GHz	SWT	280 ms	Unit	dBm

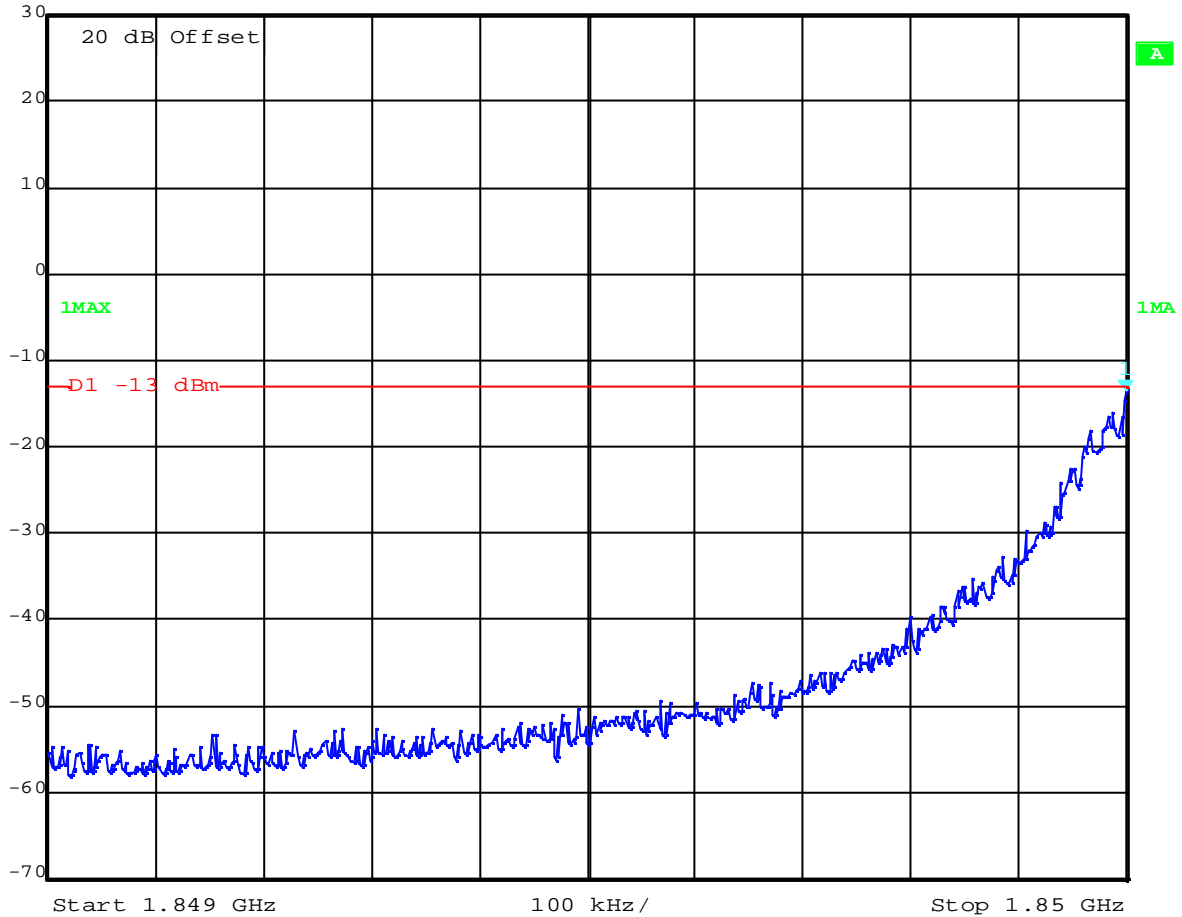


Date: 8.JAN.2004 07:14:28

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

## Channel 512



Marker 1 [T1] RBW 100 kHz RF Att 30 dB  
Ref Lvl -32.12 dBm VBW 100 kHz  
30 dBm 6.58126854 GHz SWT 5.8 s Unit dBm

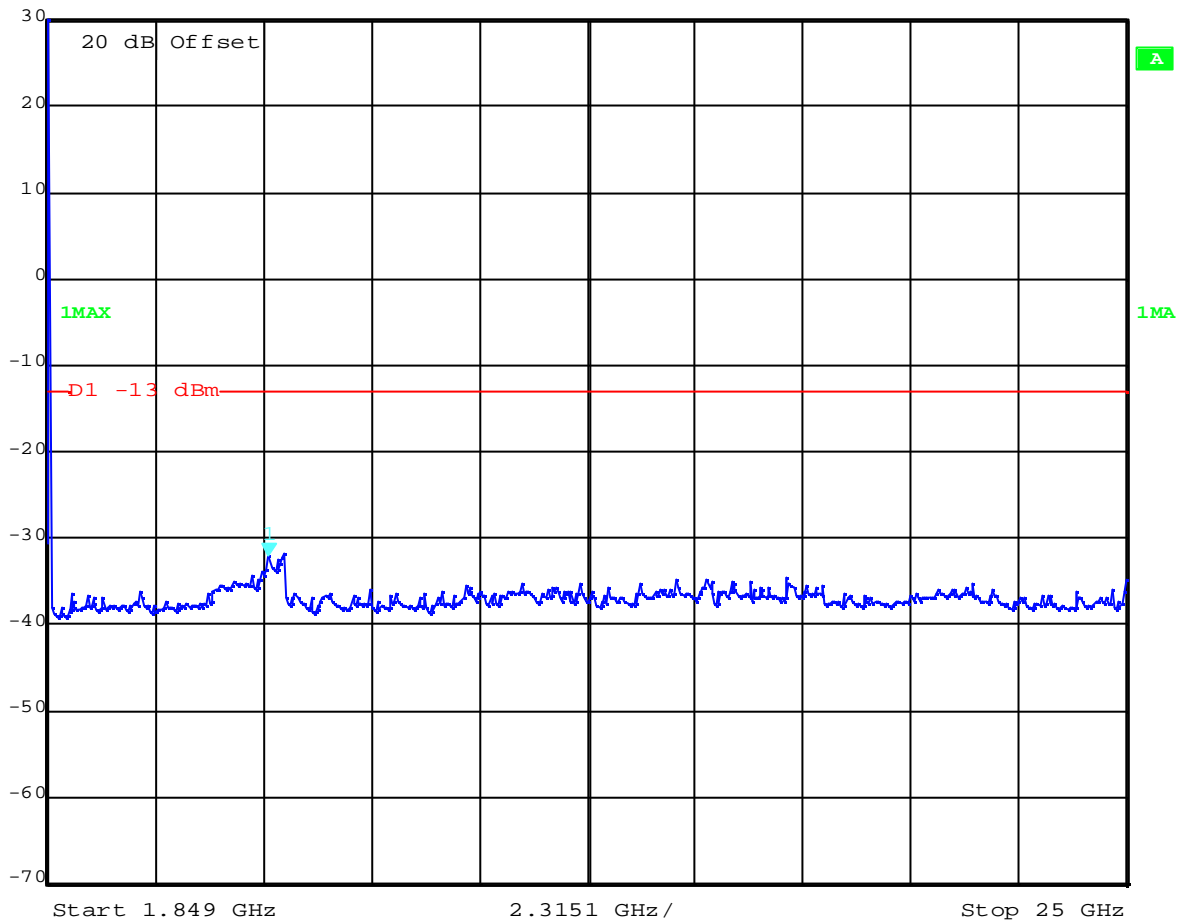

Date: 8.JAN.2004 07:19:08


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## Channel 661



Marker 1 [T1]      RBW    100 kHz    RF Att    30 dB  
 Ref Lvl                      -23.78 dBm    VBW    100 kHz  
 30 dBm                      1.87900000 GHz    SWT    470 ms    Unit            dBm

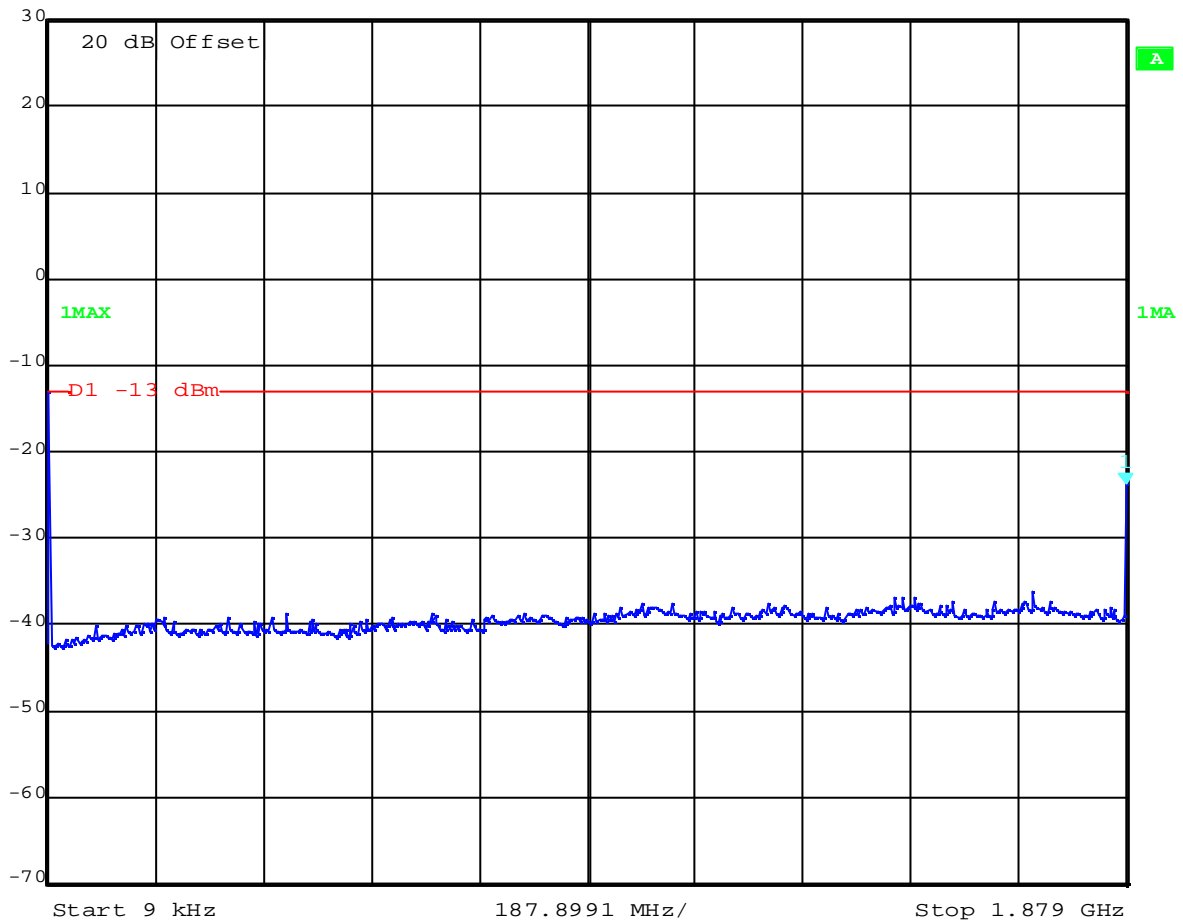


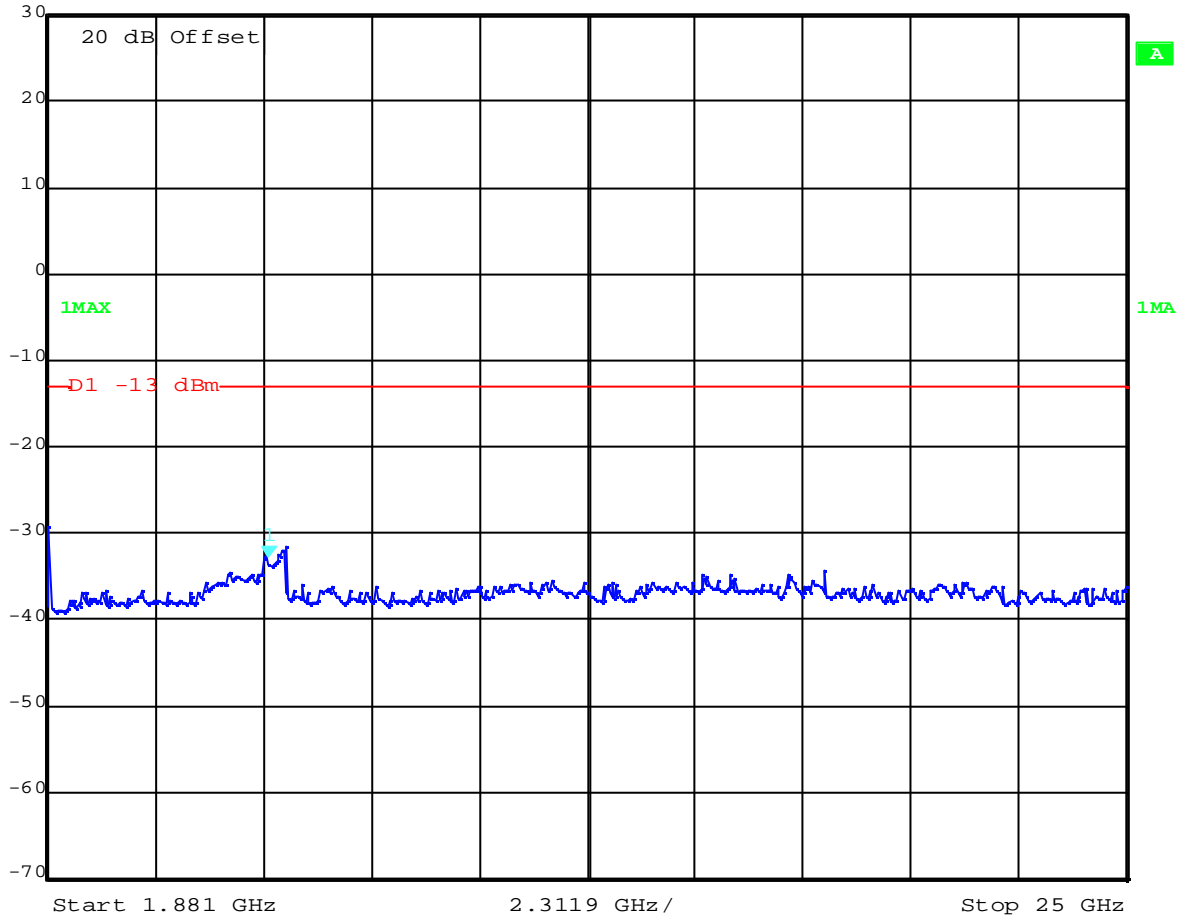
Date: 8.JAN.2004 07:23:05

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## Channel 661


Marker 1 [T1]
RBW 100 kHz
RF Att 30 dB  
Ref Lvl -32.81 dBm
VBW 100 kHz  
30 dBm
6.60672745 GHz
SWT 5.8 s
Unit dBm




Date: 8.JAN.2004 07:26:31

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

## Channel 810



Marker 1 [T1] RBW 100 kHz RF Att 30 dB  
 Ref Lvl -23.63 dBm VBW 100 kHz  
 30 dBm 1.90880000 GHz SWT 480 ms Unit dBm

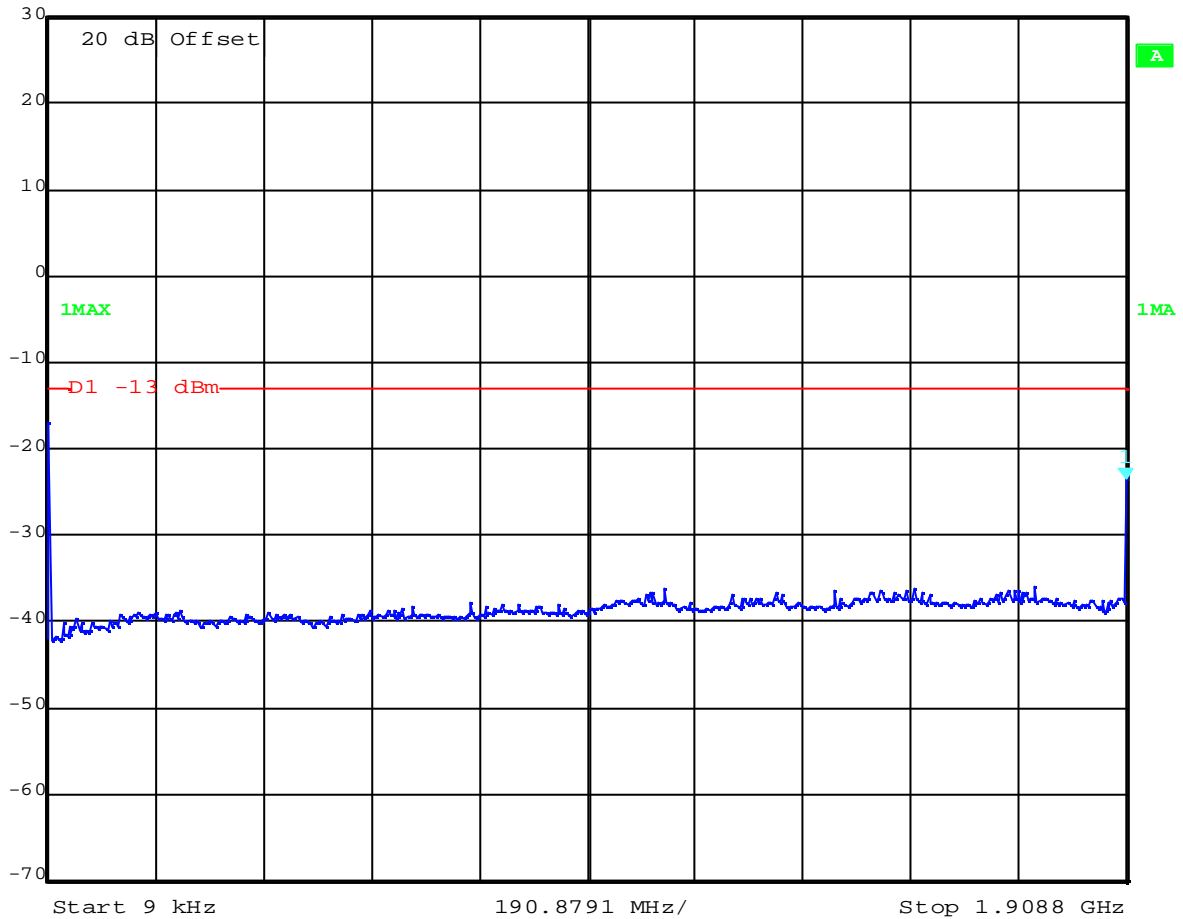


Date: 8.JAN.2004 07:55:04

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

## Channel 810



Marker 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl -16.17 dBm VBW 3 kHz  
30 dBm 1.91000401 GHz SWT 280 ms Unit dBm

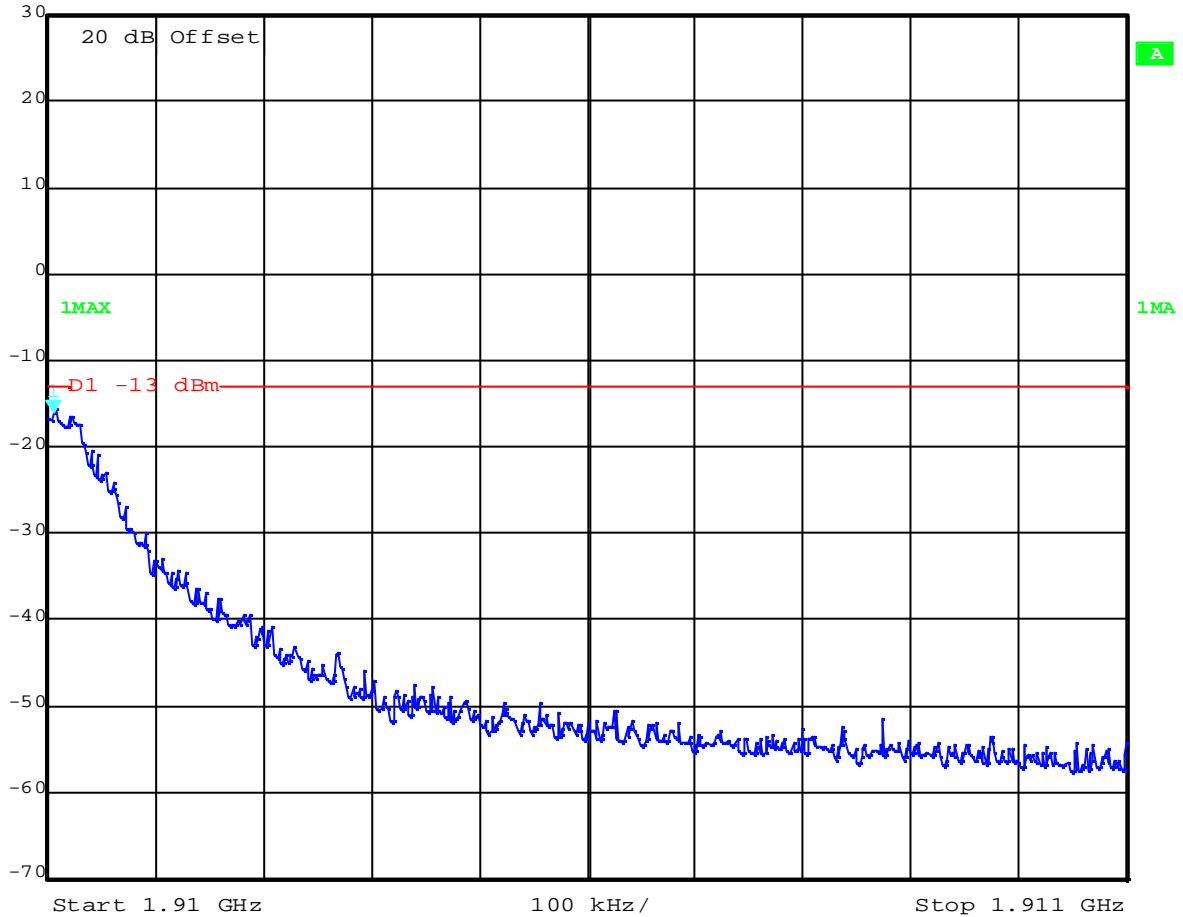


Date: 8.JAN.2004 07:57:35

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

## Channel 810



Ref Lvl	30 dBm	Marker 1 [T1]	-37.98 dBm	RBW	1 MHz	RF Att	10 dB
			12.0000000 GHz	VBW	1 MHz		
				SWT	74 ms	Unit	dBm

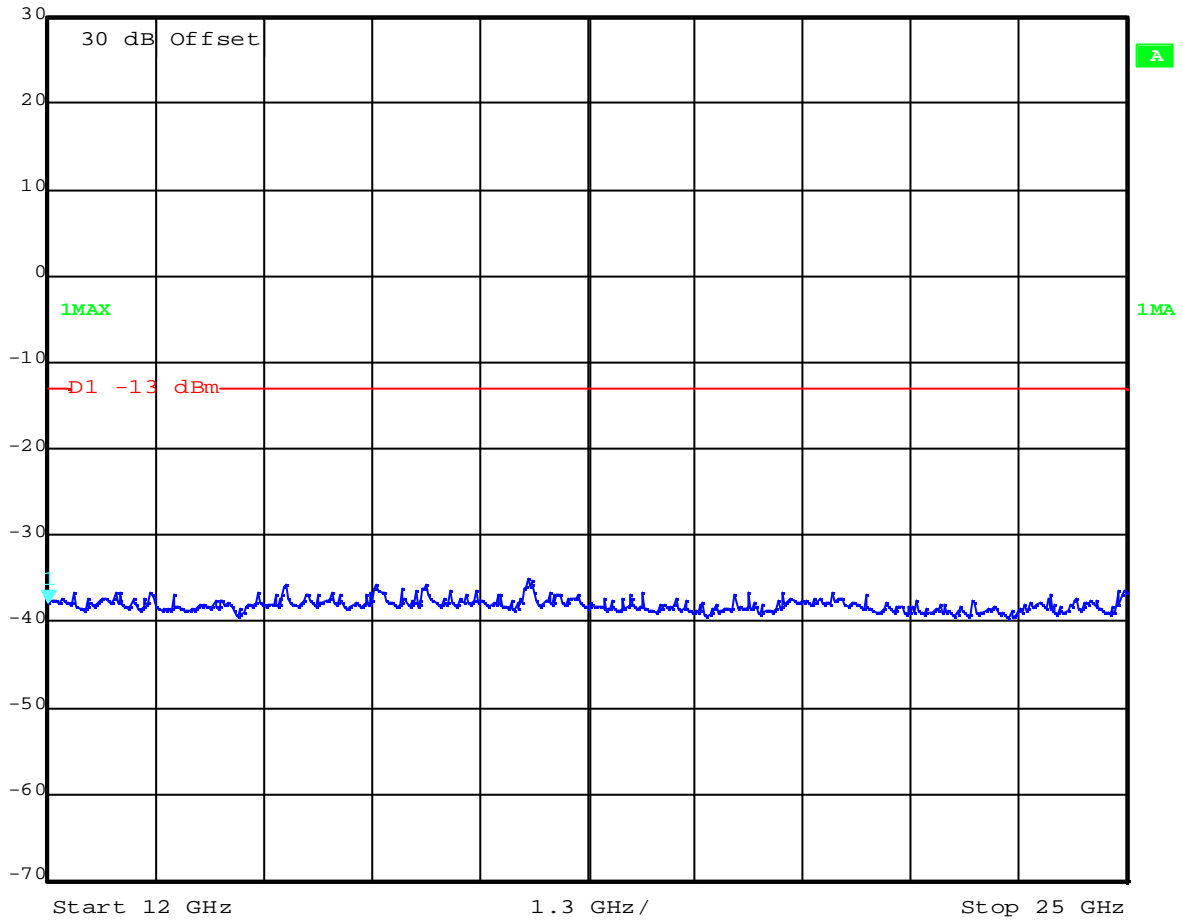

Date: 7.JAN.2004 14:10:09

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)



## BLOCK EDGE COMPLIANCE FOR BLOCK A AND C

### Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### Measurements:

#### Block A Channel 512




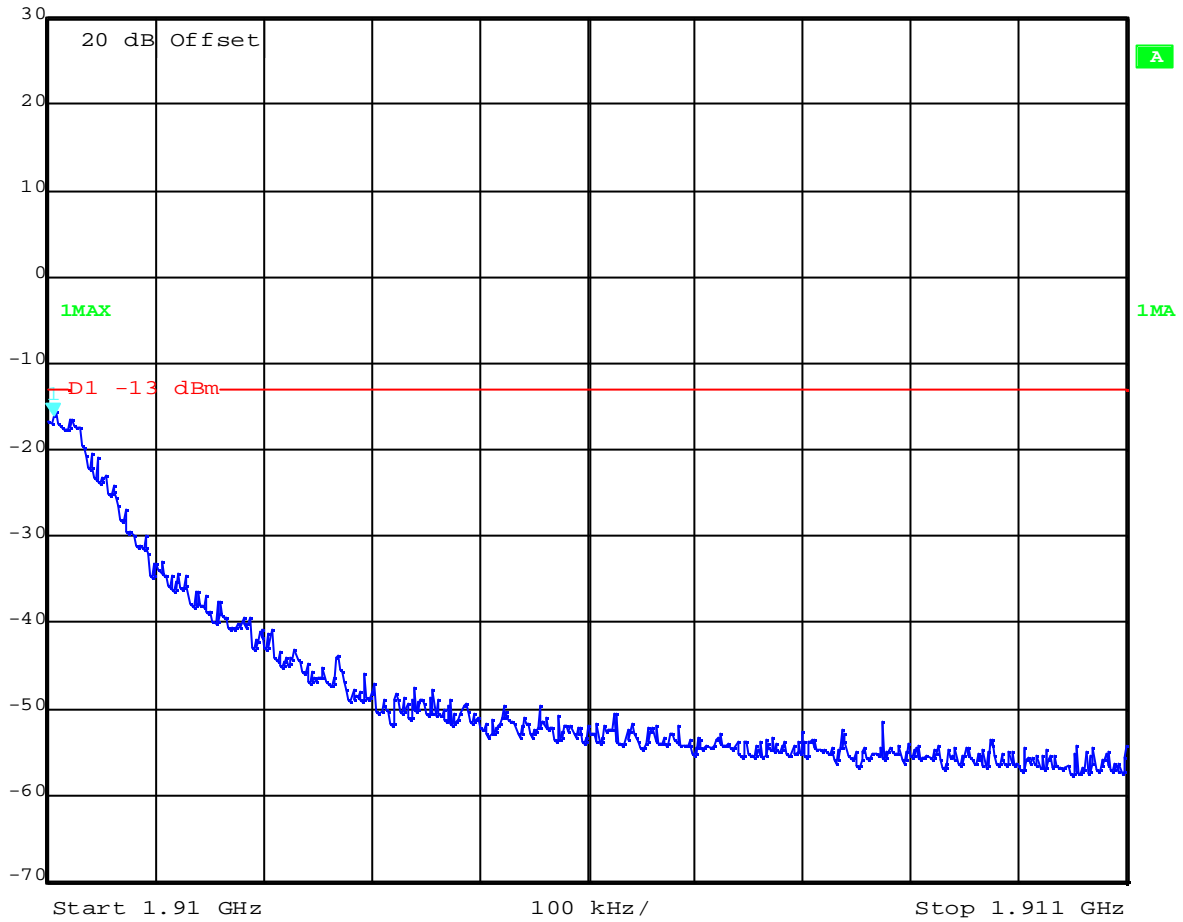
Date: 8.JAN.2004 07:14:28

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

## Block C Channel 810


Marker 1 [T1]
RBW 3 kHz
RF Att 30 dB  
Ref Lvl -16.17 dBm
VBW 3 kHz  
30 dBm
1.91000401 GHz
SWT 280 ms
Unit dBm



Date: 8.JAN.2004 07:57:35

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## **OCCUPIED BANDWIDTH**

**§2.989**

### **Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

<b>Frequency</b>	<b>99% Occupied Bandwidth</b>	<b>-26 dBc Bandwidth</b>
<b>1850.2 MHz</b>	<b>286.573 kHz</b>	<b>316.633 kHz</b>
<b>1880.0 MHz</b>	<b>292.585 kHz</b>	<b>320.641 kHz</b>
<b>1909.8 MHz</b>	<b>292.585 kHz</b>	<b>318.637 kHz</b>

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 299.7 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.


### **REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

## Channel 512 99% Occupied Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-1.46 dB	VBW	3 kHz	
	22.6 dBm	286.57314629 kHz	SWT	280 ms	Unit

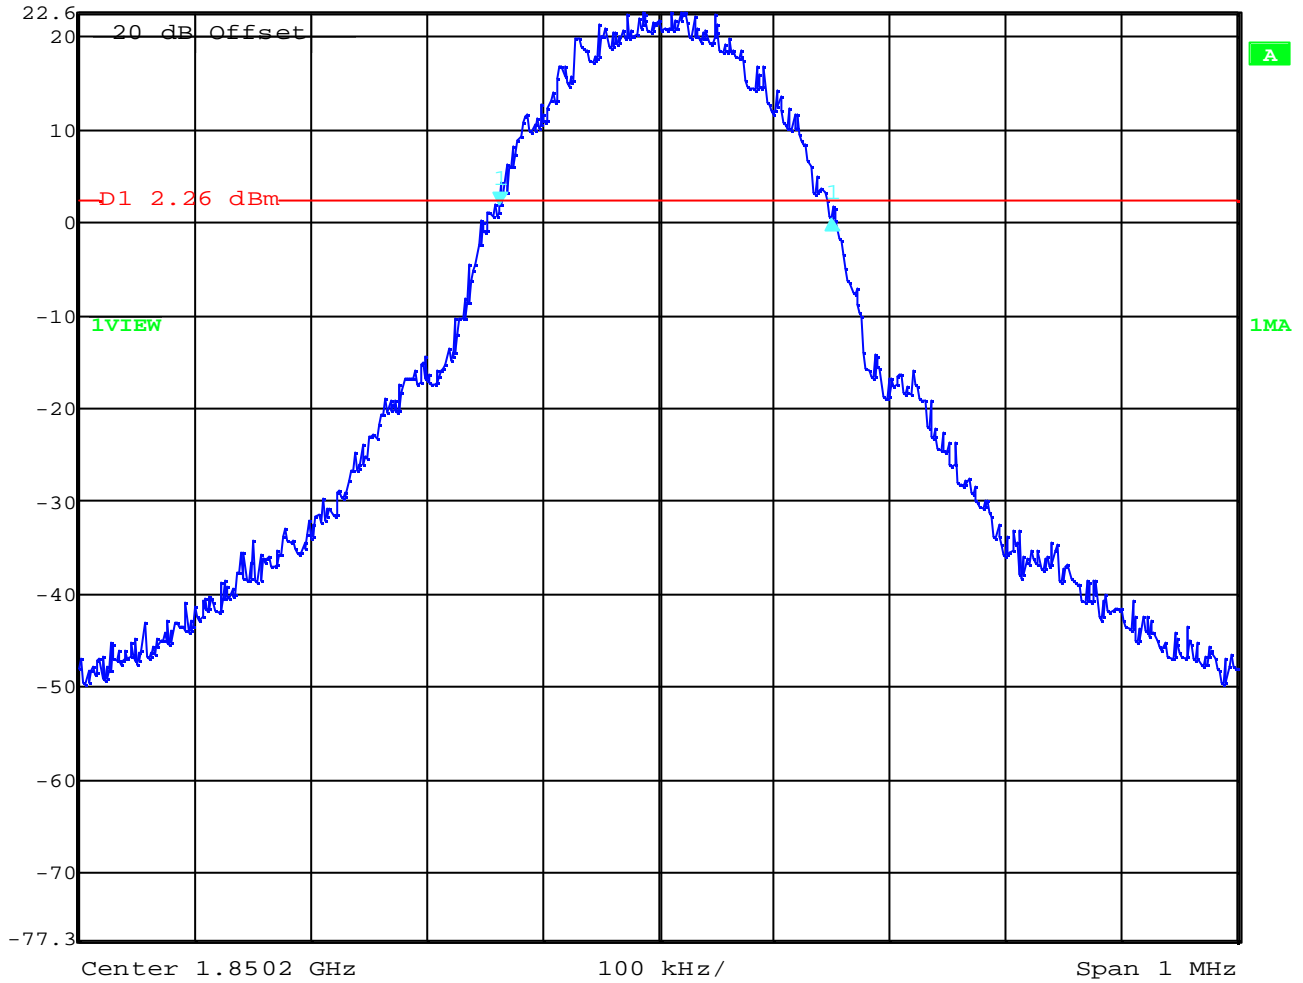


Date: 8.JAN.2004 08:07:15

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)  
 17 - 24; 64

## Channel 512 -26 dBc Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-1.28 dB	VBW	3 kHz	
	22.6 dBm	316.63326653 kHz	SWT	280 ms	Unit dBm

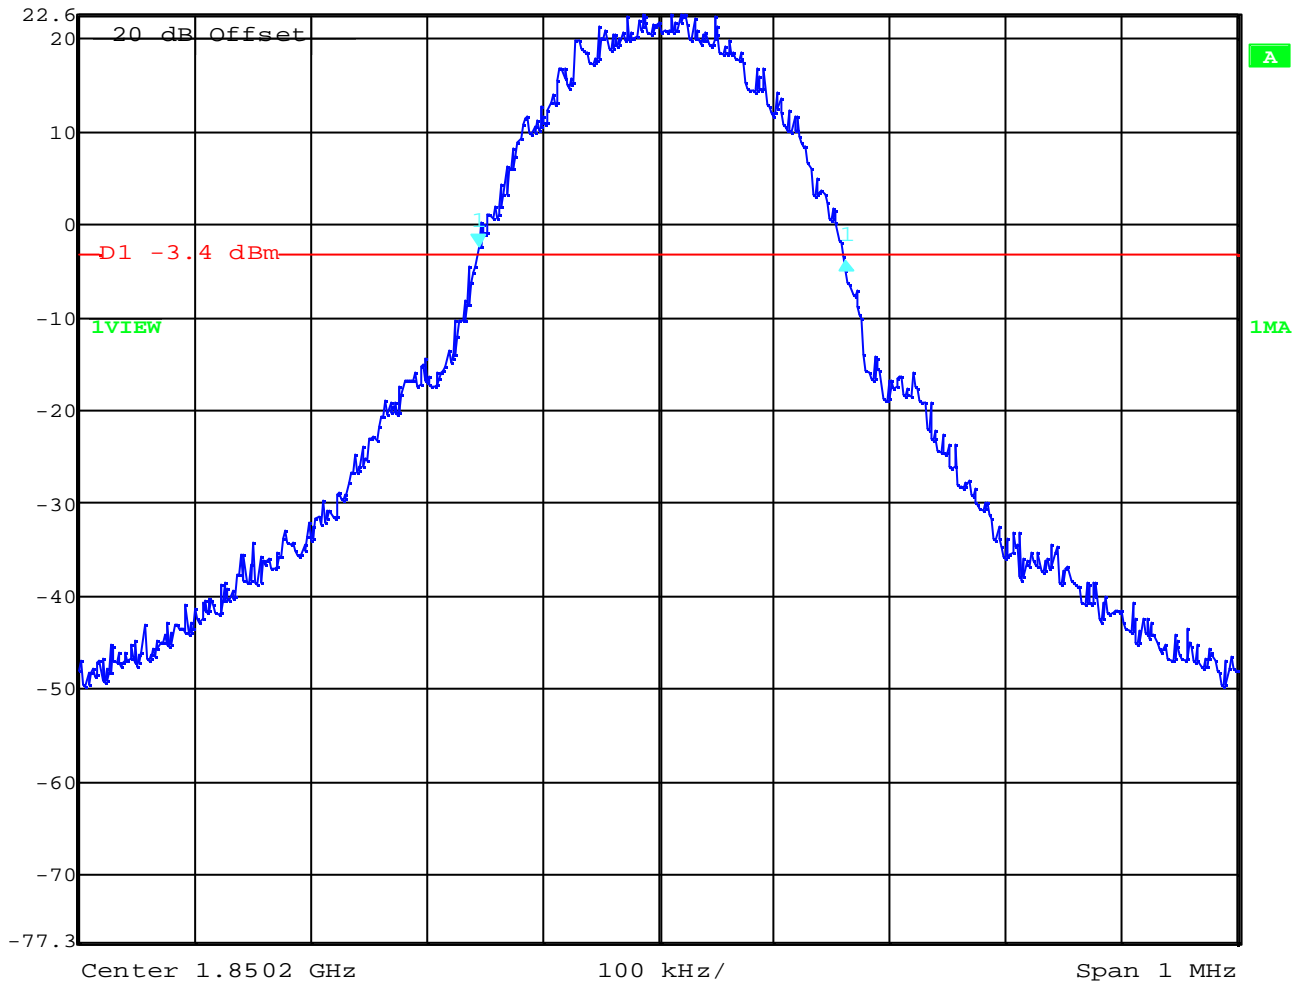


Date: 8.JAN.2004 08:08:40

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)  
 17 - 24; 64

## Channel 661 99% Occupied Bandwidth


	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	1.31 dB	VBW	3 kHz	
	22 dBm	292.58517034 kHz	SWT	280 ms	Unit dBm

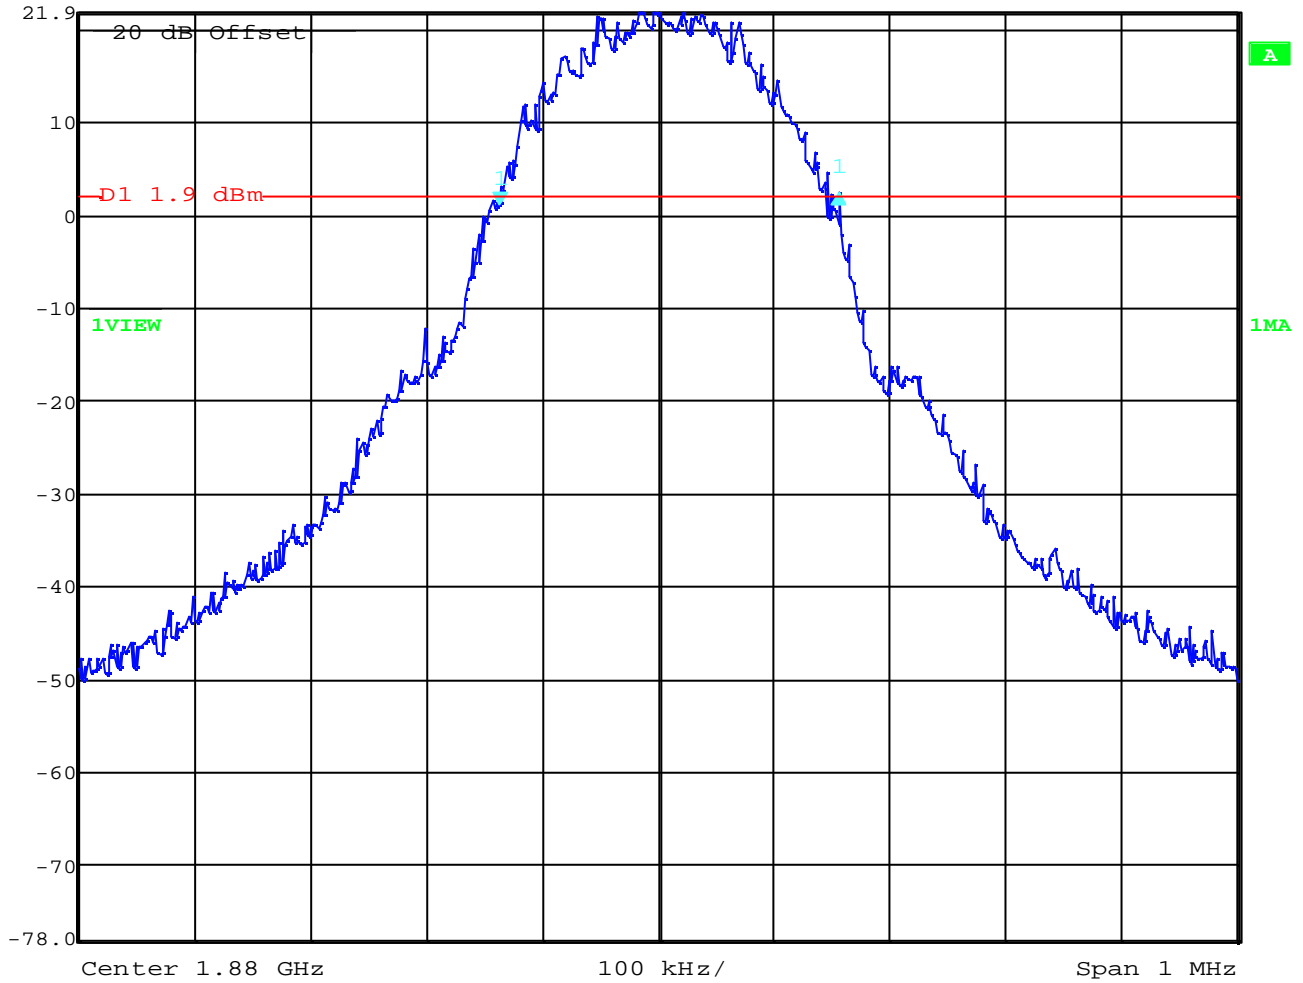


Date: 8.JAN.2004 08:13:18

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)  
 17 - 24; 64

**Channel 661**  
**-26 dBc Bandwidth**


 Delta 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl -0.71 dB VBW 3 kHz  
22 dBm 320.64128257 kHz SWT 280 ms Unit dBm

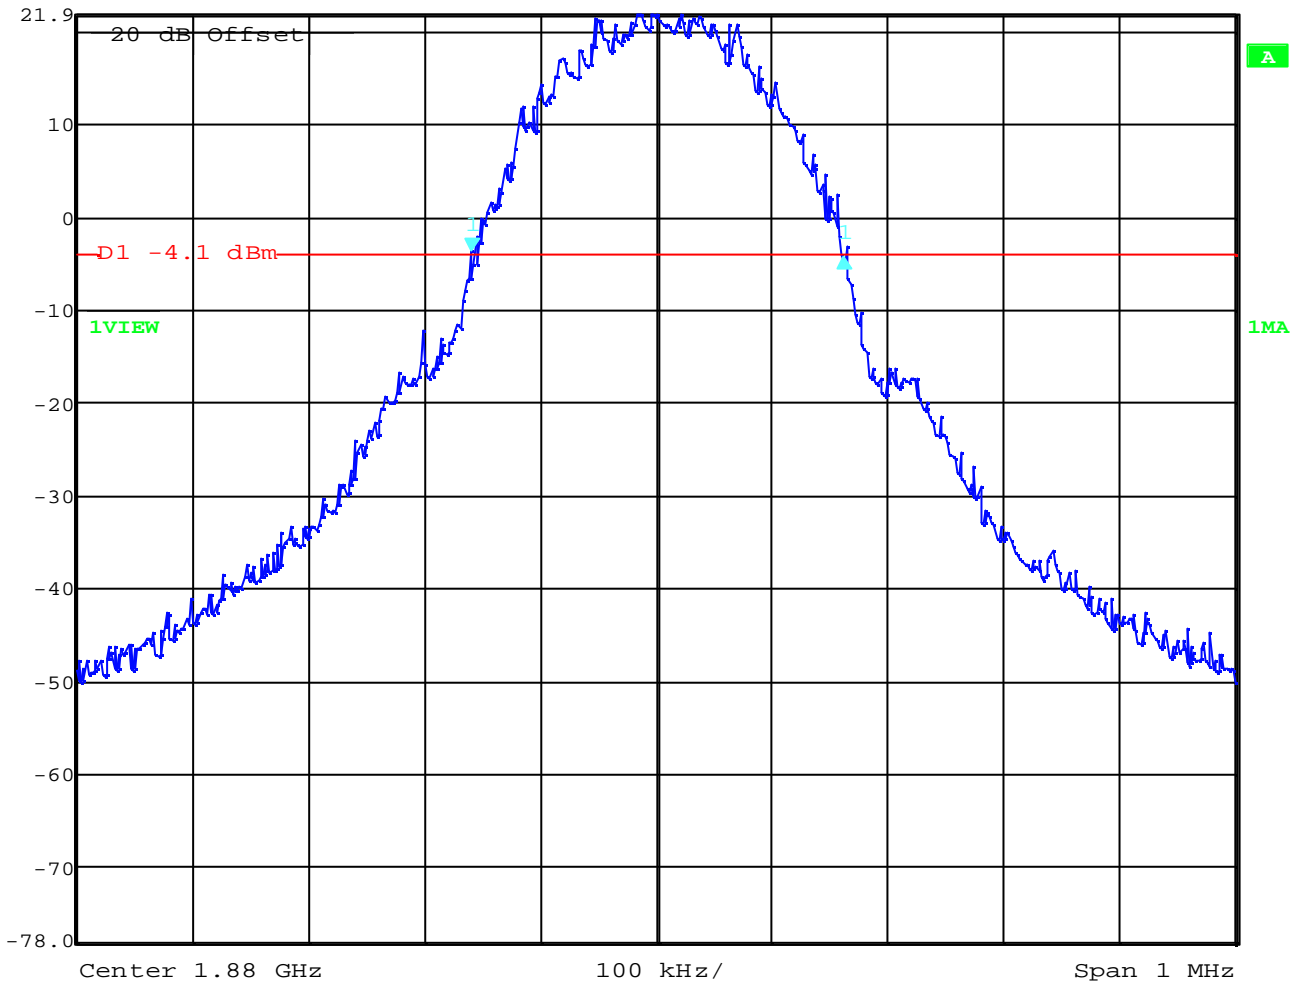


Date: 8.JAN.2004 08:14:16

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
**(for reference numbers see test equipment listing)**  
**17 - 24; 64**

## Channel 810 99% Occupied Bandwidth

 Delta 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl 0.44 dB VBW 3 kHz  
22.4 dBm 292.58517034 kHz SWT 280 ms Unit dBm

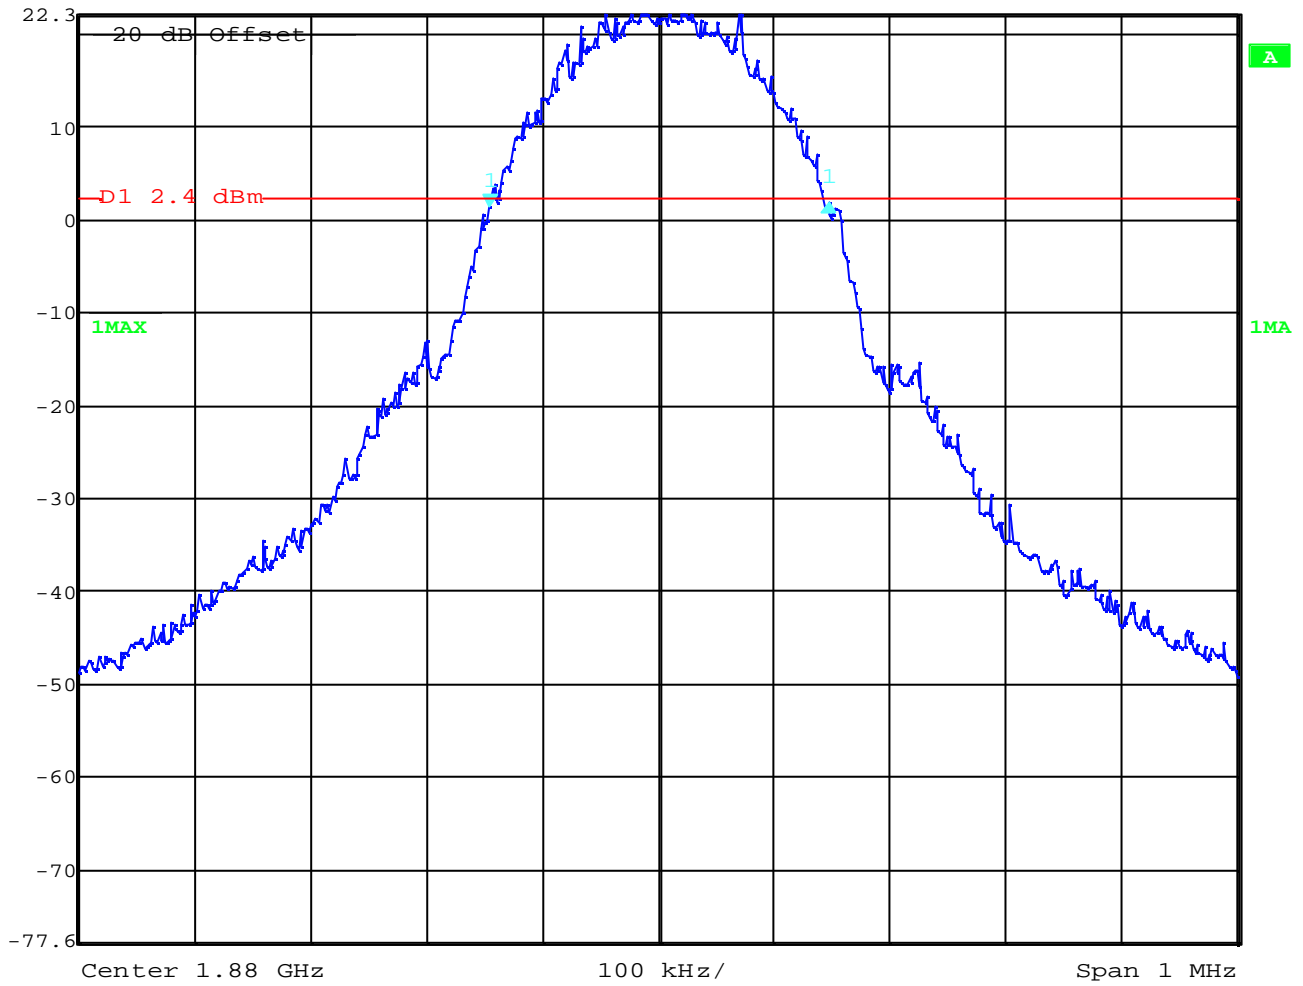


Date: 8.JAN.2004 08:24:47

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)  
17 - 24; 64



## Channel 810 -26 dBc Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-0.48 dB	VBW	3 kHz	
	22.4 dBm	318.63727455 kHz	SWT	280 ms	Unit dBm

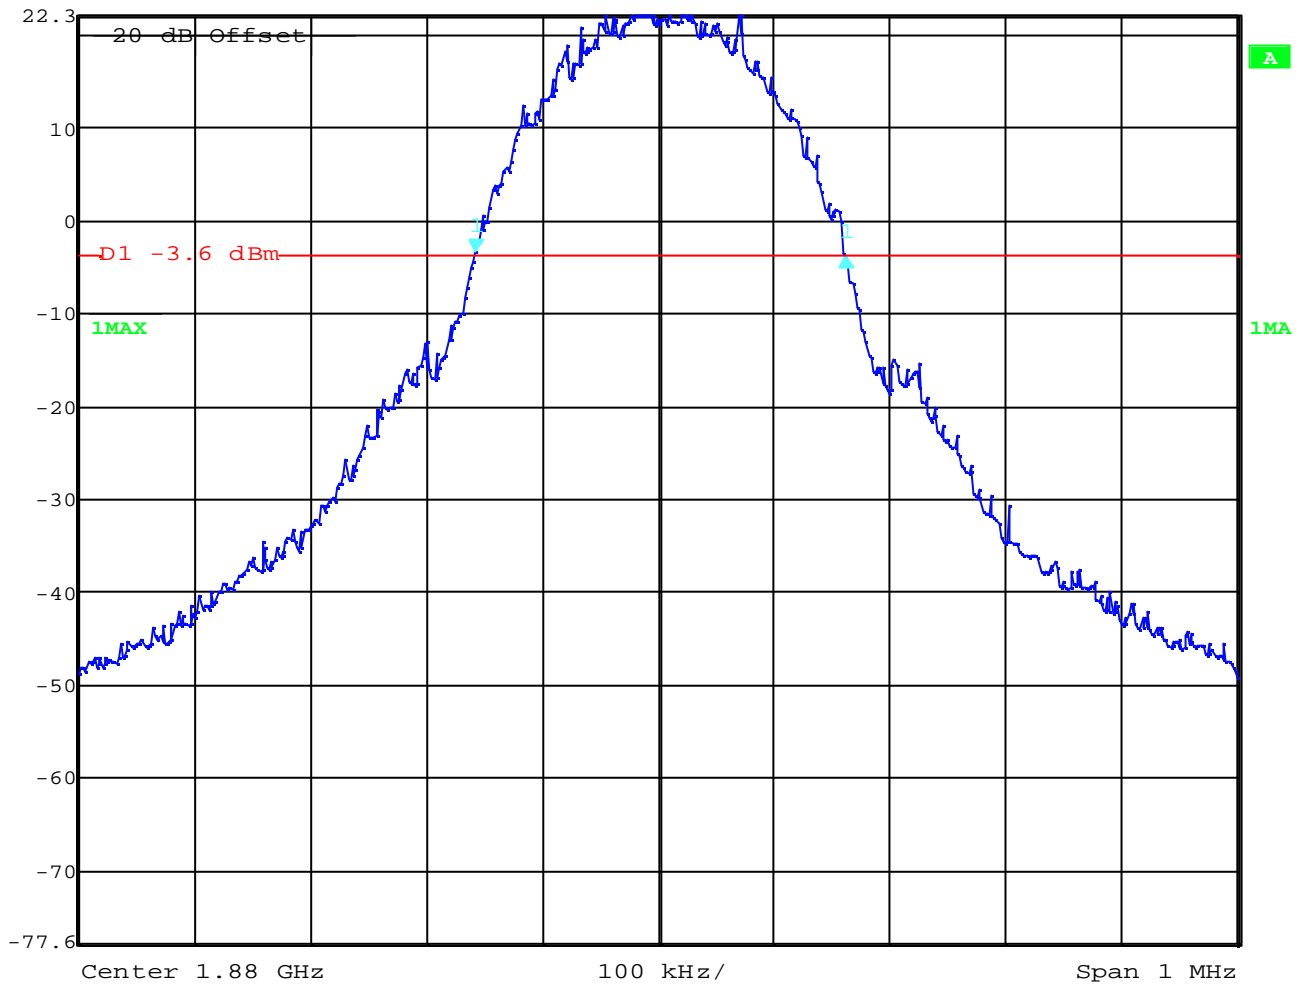

Date: 8.JAN.2004 08:25:52


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)  
 17 - 24; 64

## CONDUCTED EMISSIONS

§ 15.107/207

### CISPR 22

EUT: One Touch 332a  
 Manufacturer: Alcatel  
 Operating Condition: **traffic mode**  
 Test Site: Room 006  
 Operator: Gillmann  
 Test Specification: EN 55022  
 Comment: 115V / 60Hz  
 Start of Test: 07.01.04 / 08:24:25

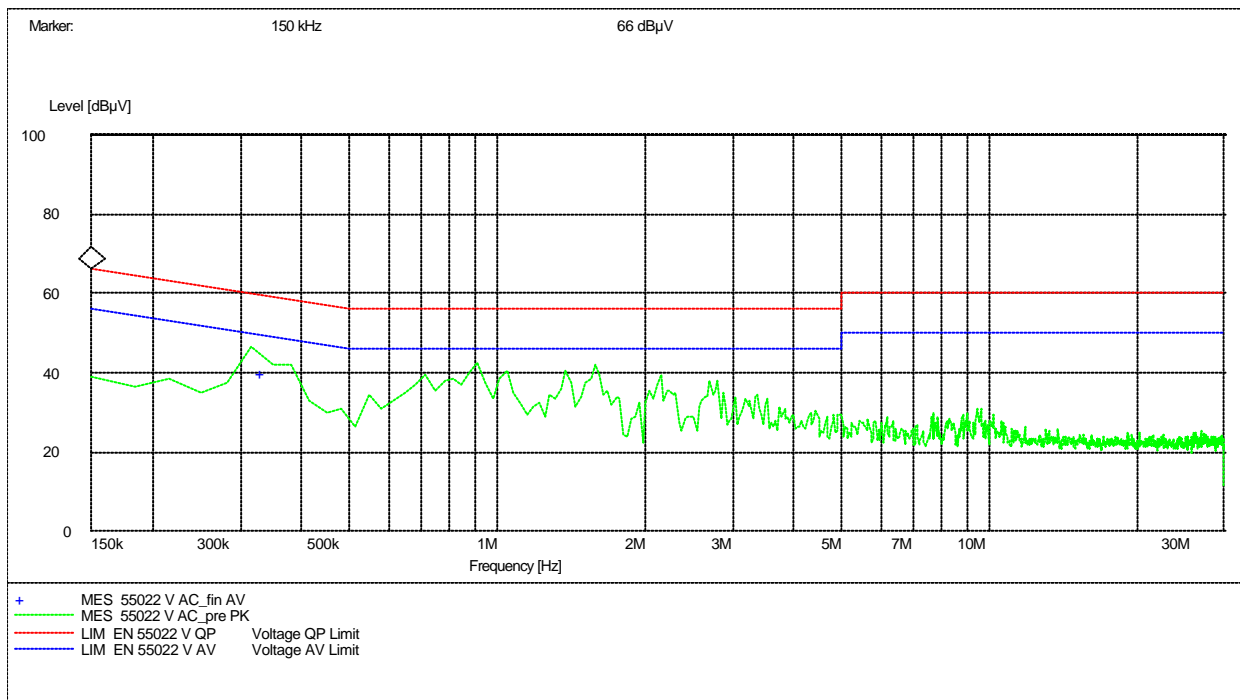

### MEASUREMENT RESULT: "55022 V AC\_fin AV"

07.01.04 08:26

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.3375	40.10	10.0	49	9.2	L1	FLO

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64

## CONDUCTED EMISSIONS

§ 15.107/207

### CISPR 22

EUT: One touch 332a  
Manufacturer: Alcatel  
Operating Condition: **Idle mode**  
Test Site: Room 006  
Operator: Gillmann  
Test Specification: EN 55022  
Comment: 115 V / 60 Hz  
Start of Test: 07.01.04 / 08:32:17

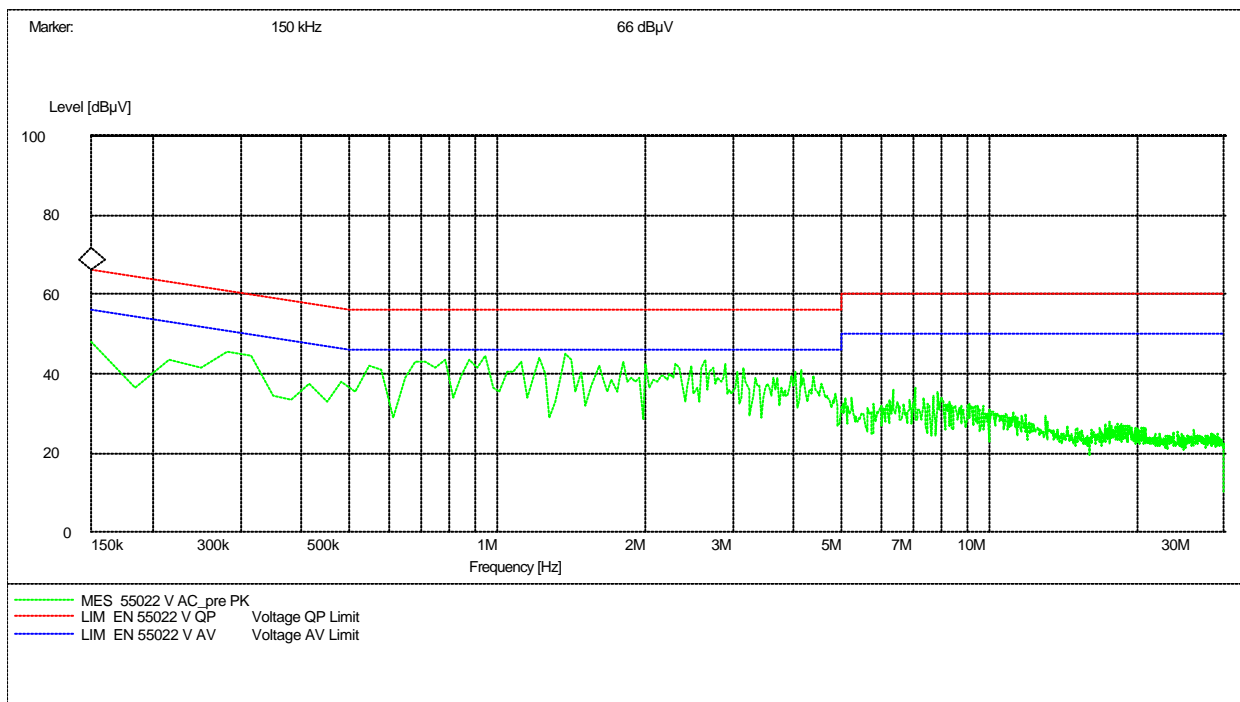

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

**PART PCS 850**

**POWER OUTPUT**

**SUBCLAUSE § 22.913**

**Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

**Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 ( peak and average)

This measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

**Limits:**

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
5	+33	? 2

**Power Measurements:**

**Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	5	33.2	33.1
836.4	5	32.7	32.6
848.8	5	32.5	32.4
Measurement uncertainty		? 0.5 dB	

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

**ERP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

**Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method**

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m test site (listed with FCC, IC).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (f) Set the EMI Receiver and #2 as follows:
  - Center Frequency: test frequency
  - Resolution BW: 100 kHz
  - Video BW: same
  - Detector Mode: positive
  - Average: off
  - Span: 3 x the signal bandwidth
- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

**Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method**

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:
  - Center Frequency : equal to the signal source
  - Resolution BW : 10 kHz
  - Video BW : same
  - Detector Mode : positive
  - Average : off
  - Span : 3 x the signal bandwidth
- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (c) Select the frequency and E-field levels for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):  
.DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- (n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:  
 $P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$   
 $EIRP = P + G1 = P3 + L2 - L1 + A + G1$   
 $ERP = EIRP - 2.15 \text{ dB}$   
 Total Correction factor in EMI Receiver # 2 =  $L2 - L1 + G1$   
 Where: P: Actual RF Power fed into the substitution antenna port after corrected.  
 P1: Power output from the signal generator  
 P2: Power measured at attenuator A input  
 P3: Power reading on the Average Power Meter  
 EIRP: EIRP after correction  
 ERP: ERP after correction
- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
- (p) Repeat step (d) to (o) for different test frequency
- (q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- (r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Power Step	Burst Peak (dBm)
0	<33

**Power Measurements ( Radiated )**

Frequency (MHz)	Power Step	BURST Peak (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
824.2	5	26.45	24.3	20.45	18.3
836.4	5	26.45	24.3	20.45	18.3
848.8	5	26.05	23.9	20.05	17.9
Measurement uncertainty		? 3 dB			

**Sample calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result	ERP	Substitution Antenna
MHz	dBµV	dBm	dB	dBd	dB	dBm	dBm	
836.4	122.5	33.1		-10.50	1.67		24.3	UHAP chwarzbeck S/N 460

$$ERP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB)}$$

\*ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.1 \text{ dB}$

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## FREQUENCY STABILITY

## SUBCLAUSE § 22.355

### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.7 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.

**AFC FREQ ERROR vs. VOLTAGE**

<b>Voltage (V)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (%)</b>	<b>Frequency Error (ppm)</b>
3.3	31	0.0000364	0.0364
3.4	30	0.0000352	0.0352
3.5	26	0.0000305	0.0305
3.6	37	0.0000435	0.0435
3.7	32	0.0000376	0.0376
3.8	35	0.0000411	0.0411
3.9	36	0.00004235	0.0423
4.0	43	0.0000505	0.0505
4.1	36	0.0000423	0.0423
4.2	26	0.0000305	0.0305
4.3	38	0.0000447	0.0447
4.4	29	0.0000341	0.0341



**AFC FREQ ERROR vs. TEMPERATURE**

<b>TEMPERATURE (°C)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (%)</b>	<b>Frequency Error (ppm)</b>
-30	28	0.0000329	0.0329
-20	39	0.0000458	0.0458
-10	41	0.0000482	0.0482
? 0.0	36	0.0000423	0.0423
+10	29	0.0000341	0.0341
+20	32	0.0000376	0.0376
+30	40	0.0000470	0.0470
+40	38	0.0000447	0.0447
+50	47	0.0000552	0.0552
+60	53	0.0000623	0.0623

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

17 – 24, 64



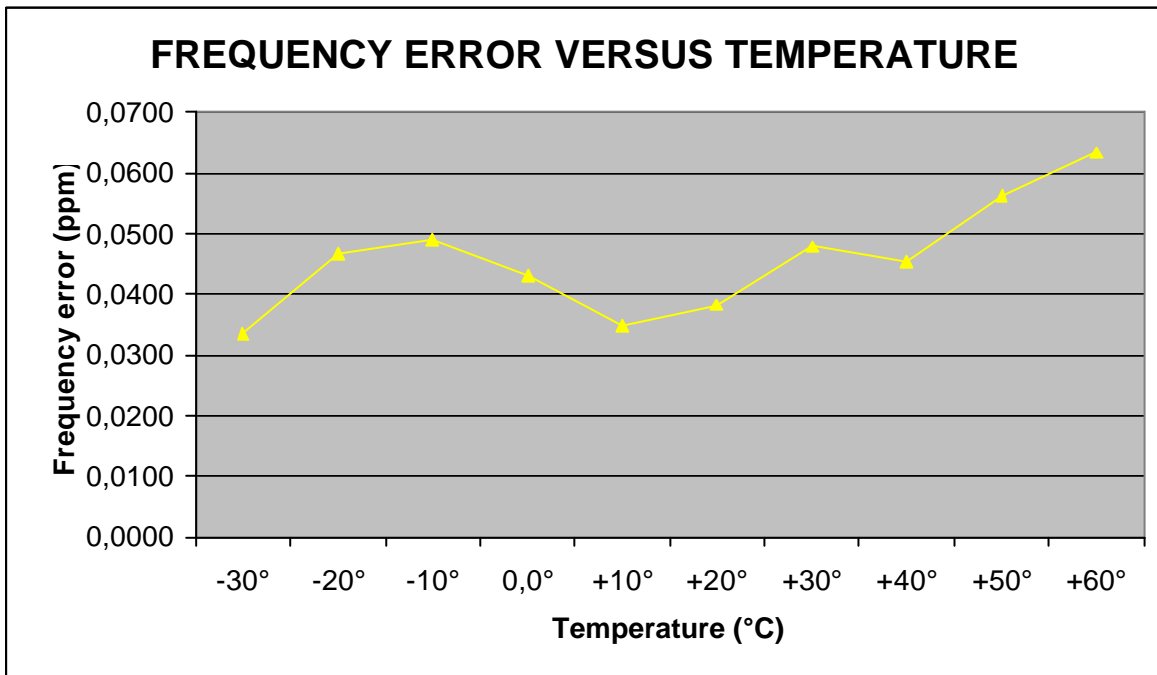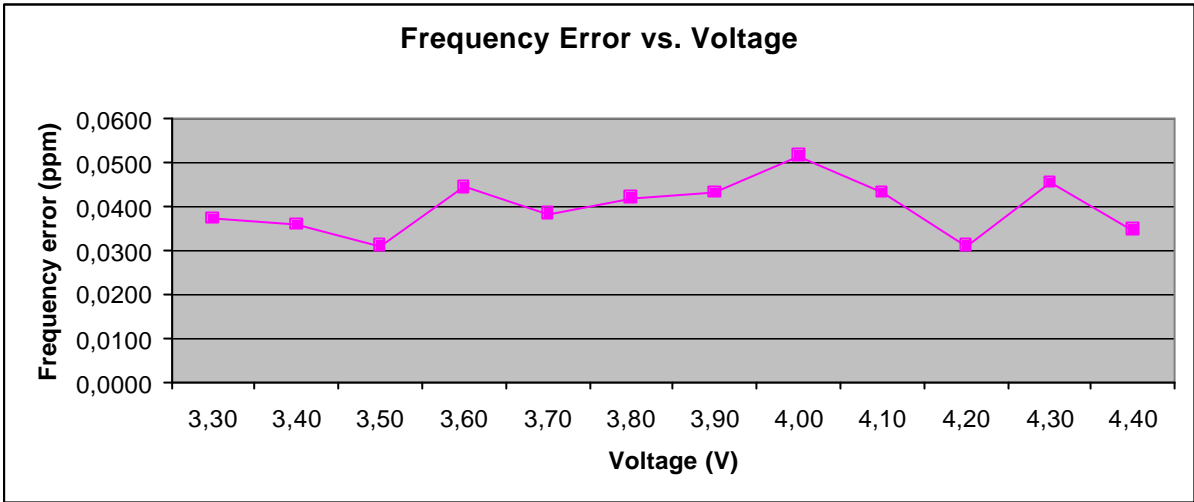

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

## EMISSIONS LIMITS

§22.917

### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

### **The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:**

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603

### **Measurement Limit:**

Sec. 22.917 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### **REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report No.: 2-3474-01-01/03

Date: 2004.01.10

Page 59 (114)

## Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.2 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

## RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-22:

The final open field radiated levels are presented on the next pages.

**All measurements were done in horizontal and vertical polarization, the plots shows the worst case.**

**As can be seen from this data, the emissions from the test item were within the specification limit.**

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission ERP (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
<b>CH 128</b>					
824.2		24.3	-13.0 (37.3 dBc)	-	carrier
1 648.4		- 28.6		52.9	complies
-		-		-	-
<b>CH 189</b>					
836.4		24.3	-13.0 (37.3 dBc)	-	carrier
1 672.4		- 34.5		58.8	complies
-		-		-	-
<b>CH 251</b>					
848.8		23.9	-13.0 (36.9 dBc)	-	carrier
1 697.6		- 18.4		42.3	complies
-		-		-	-
Measurement uncertainty		± 0.5dB			

## Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result	ERP	Substitution Antenna
MHz	dBμV	dBm	dBi	dBd	dB	dBm	dBm	
836.4	122.5	36.5		-10.50	1.67		24.3	UHAP chwarzbeck S/N 460

$$\text{ERP} = \text{SG (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB)}$$

\*ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.1\text{dBi}$


## REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

## Part 15.209 Magnetics

**Traffic Mode - Valid for all 3 channels (9 kHz up to 30 MHz)**

EUT: One touch 332a  
 Manufacturer: Alcatel  
 Operating Condition: Traffic mode  
 Test Site: Cetecom, Room 6  
 Operator: Gillmann  
 Comment: 115V / 60 Hz  
 Start of Test: 07.01.04 / 08:40:15

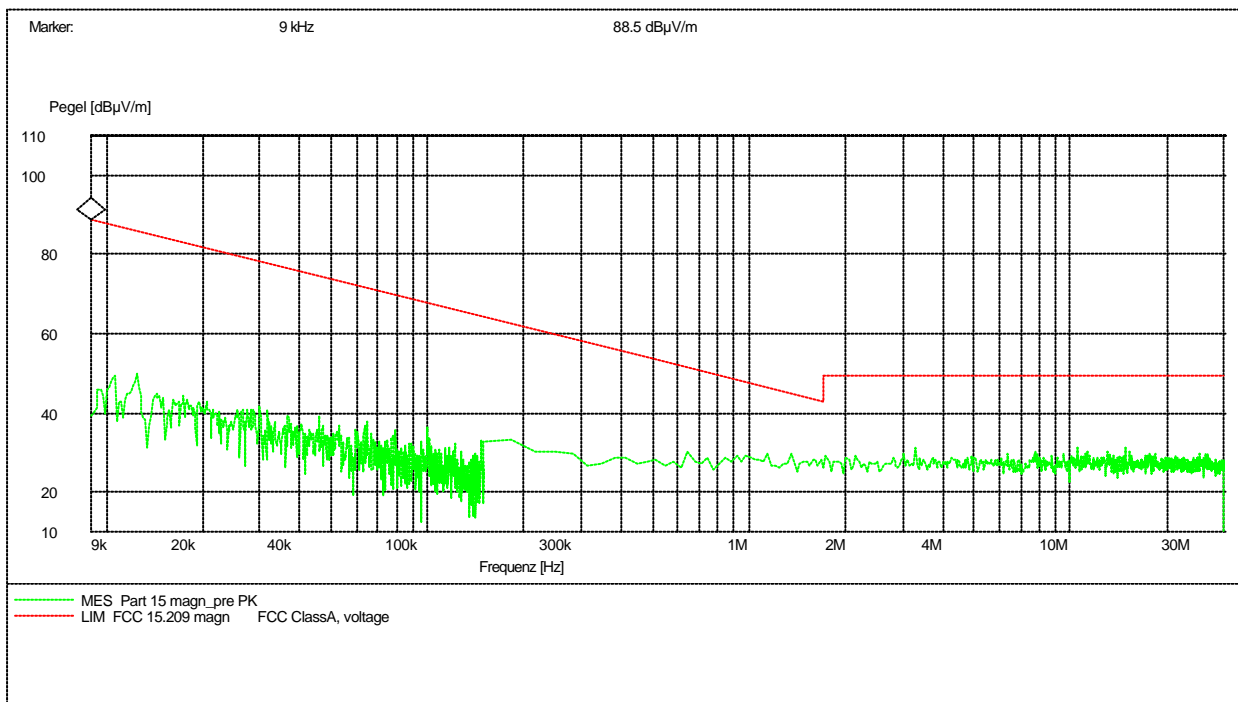

**For peak measurement we use 100 kHz RBW/VBW**

**For CISPR QP measurement we use 200 Hz from 9 kHz to 150kHz**

**9 kHz from 150 kHz to 30 MHz**

### Limits


### SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

## Channel 128 (up to 4 GHz)

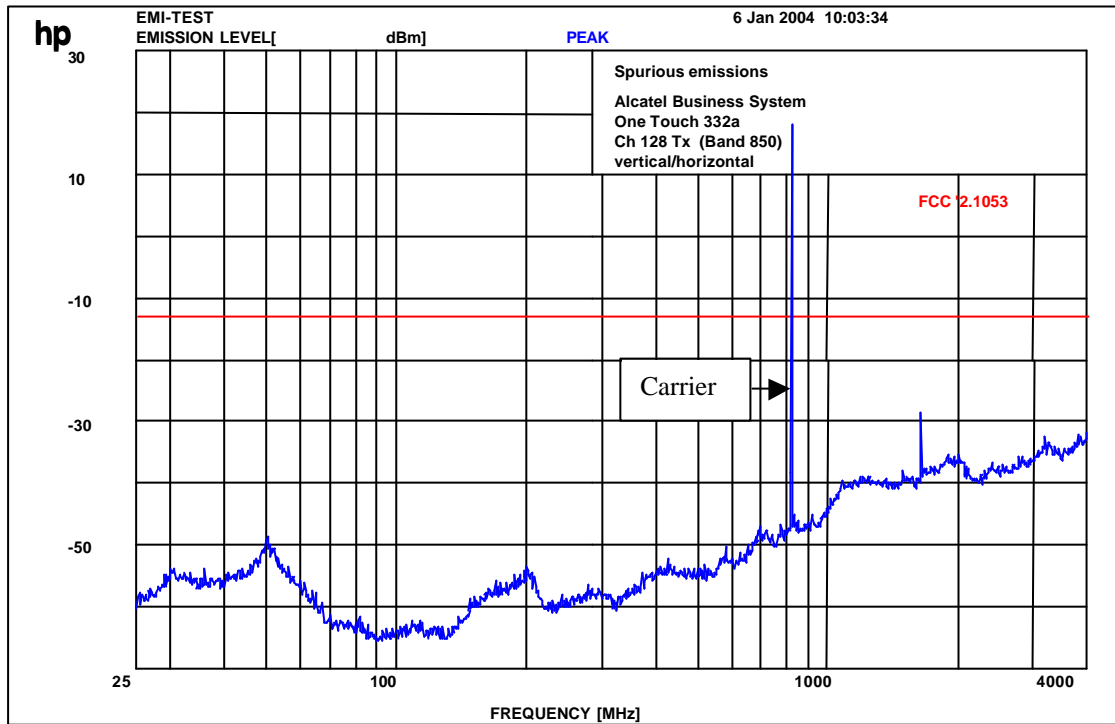


f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

## Channel 128 (up to 12 GHz)

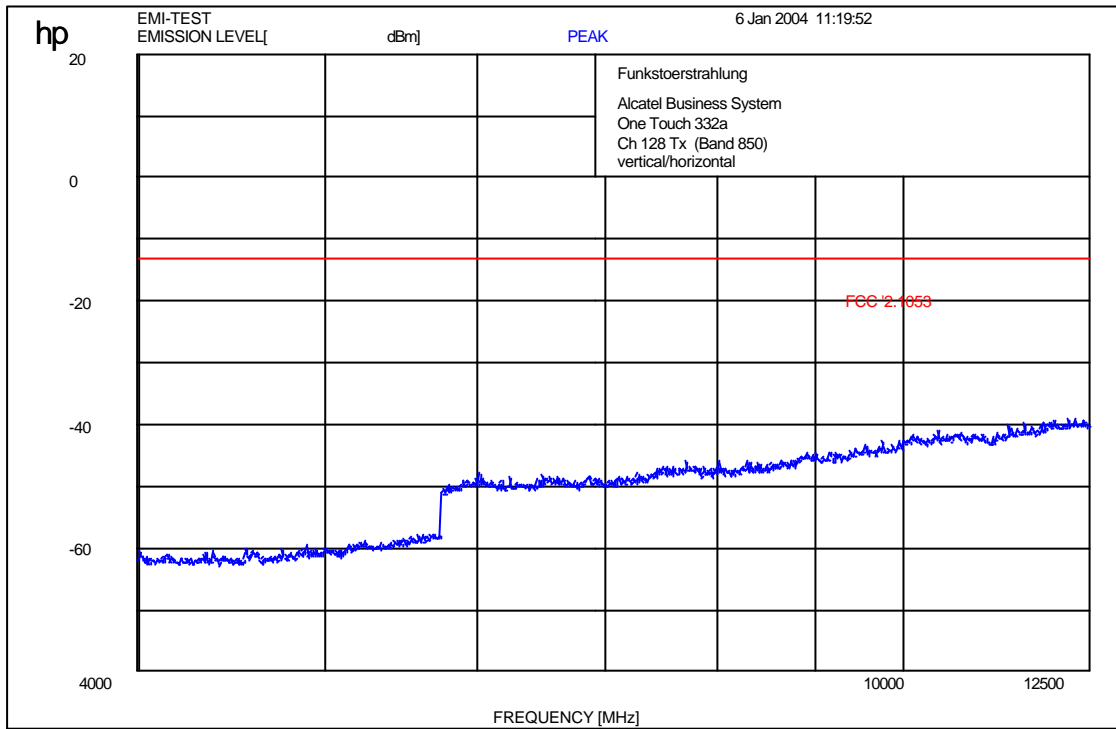

f < 1 GHz : RBW/VBW: 100 kHz

f ? 1GHz : RBW/VBW 1 MHz

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

## Channel 128 (up to 25 GHz)



Marker 1 [T1]


RBW 1 MHz RF Att 10 dB

Ref Lvl -38.14 dBm

VBW 1 MHz


30 dBm 12.0000000 GHz

SWT 74 ms Unit dBm

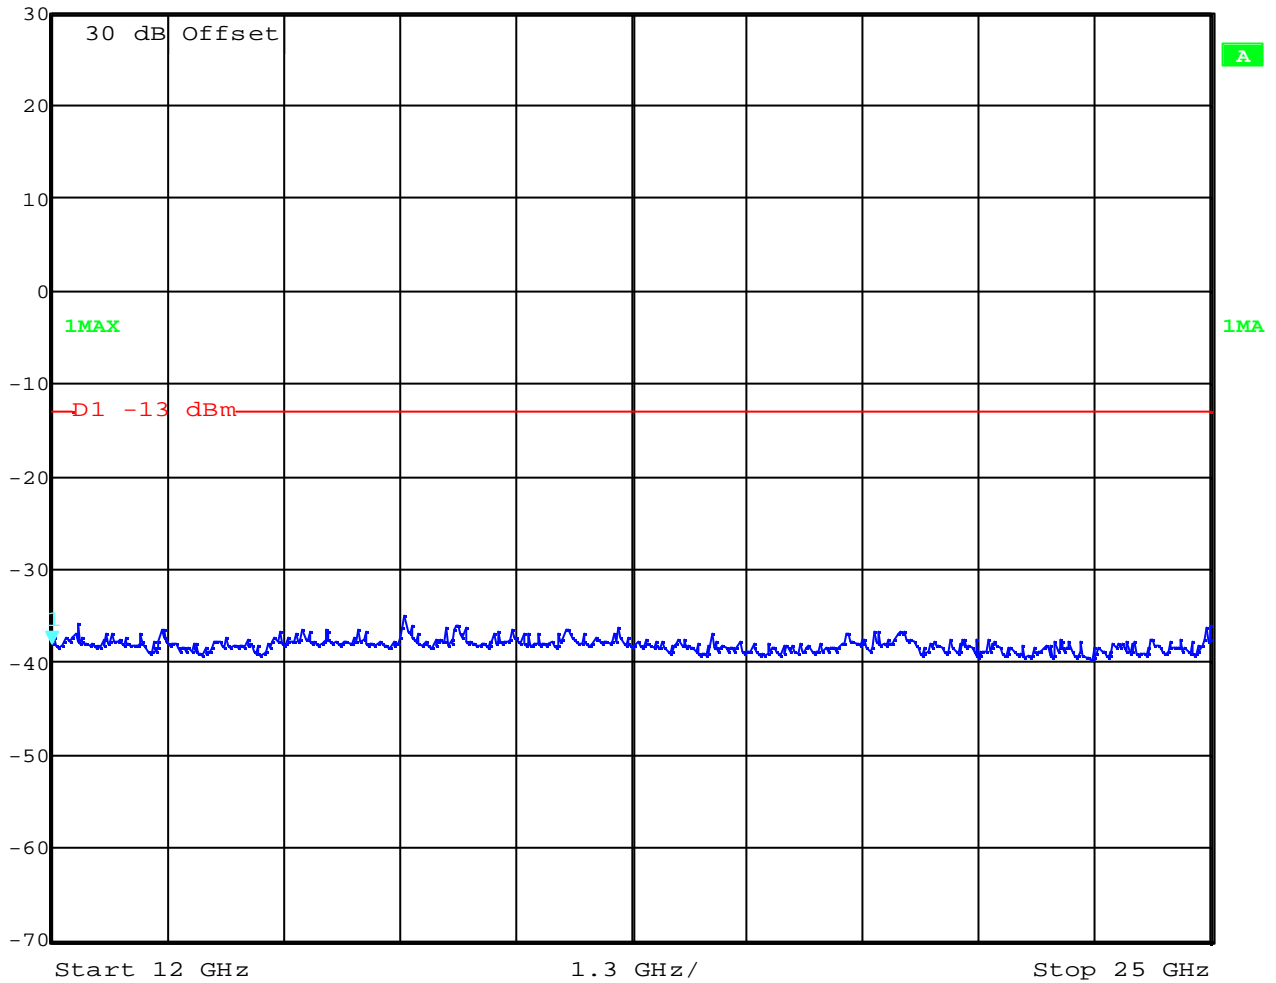

Date: 7.JAN.2004 14:18:36


Channel 189 (up to 4 GHz)

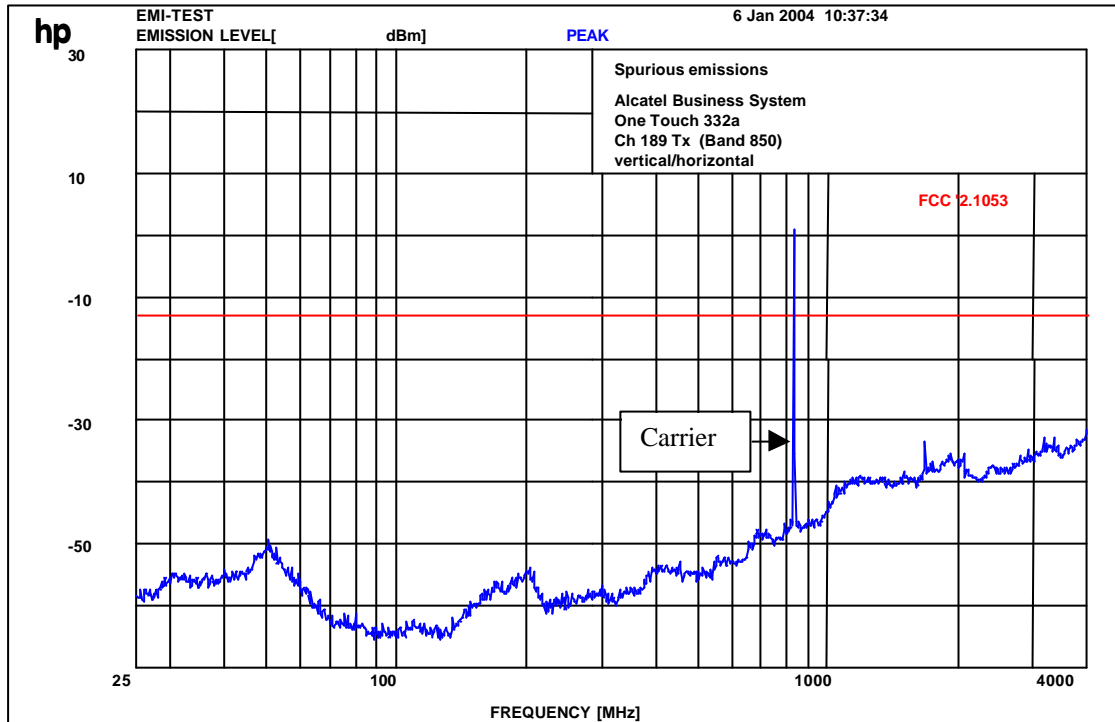

f < 1 GHz : RBW/VBW: 100 kHz      f ? 1GHz : RBW/VBW 1 MHz  
Carrier suppressed with a rejection filter



## Channel 189 (up to 12 GHz)

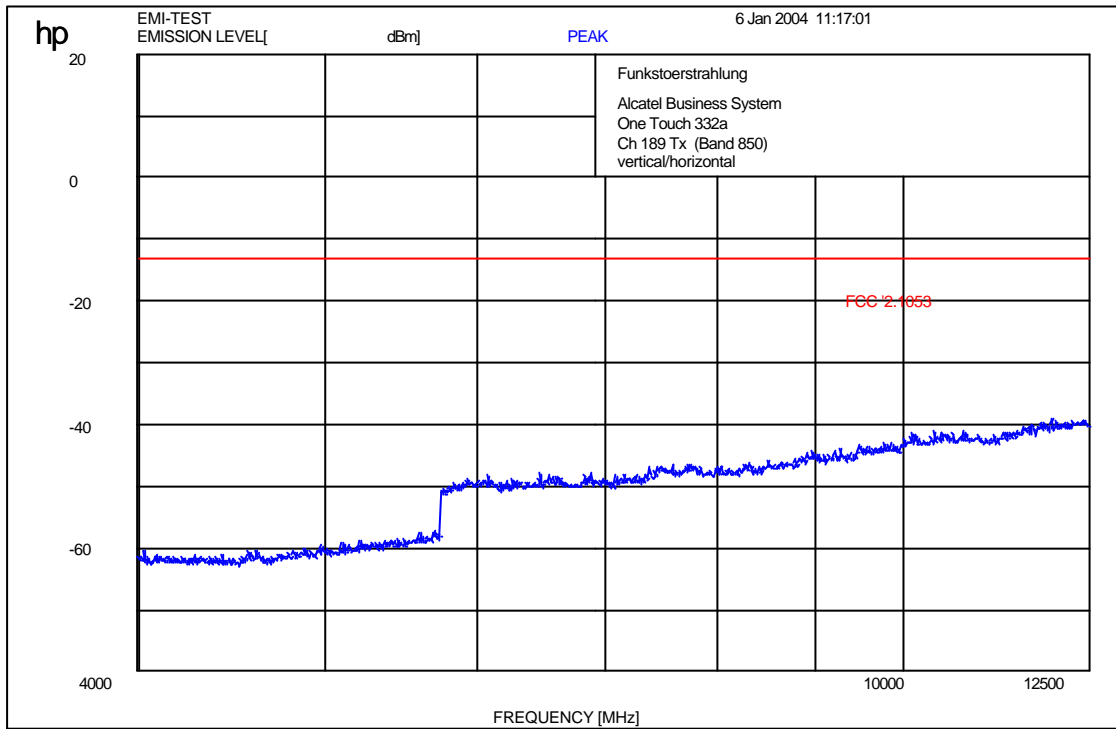

f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW/VBW 1 MHz


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64


## Channel 189 (up to 25 GHz)

	Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	30 dBm	-37.67 dBm	VBW	1 MHz		
		12.00000000 GHz	SWT	74 ms	Unit	dBm

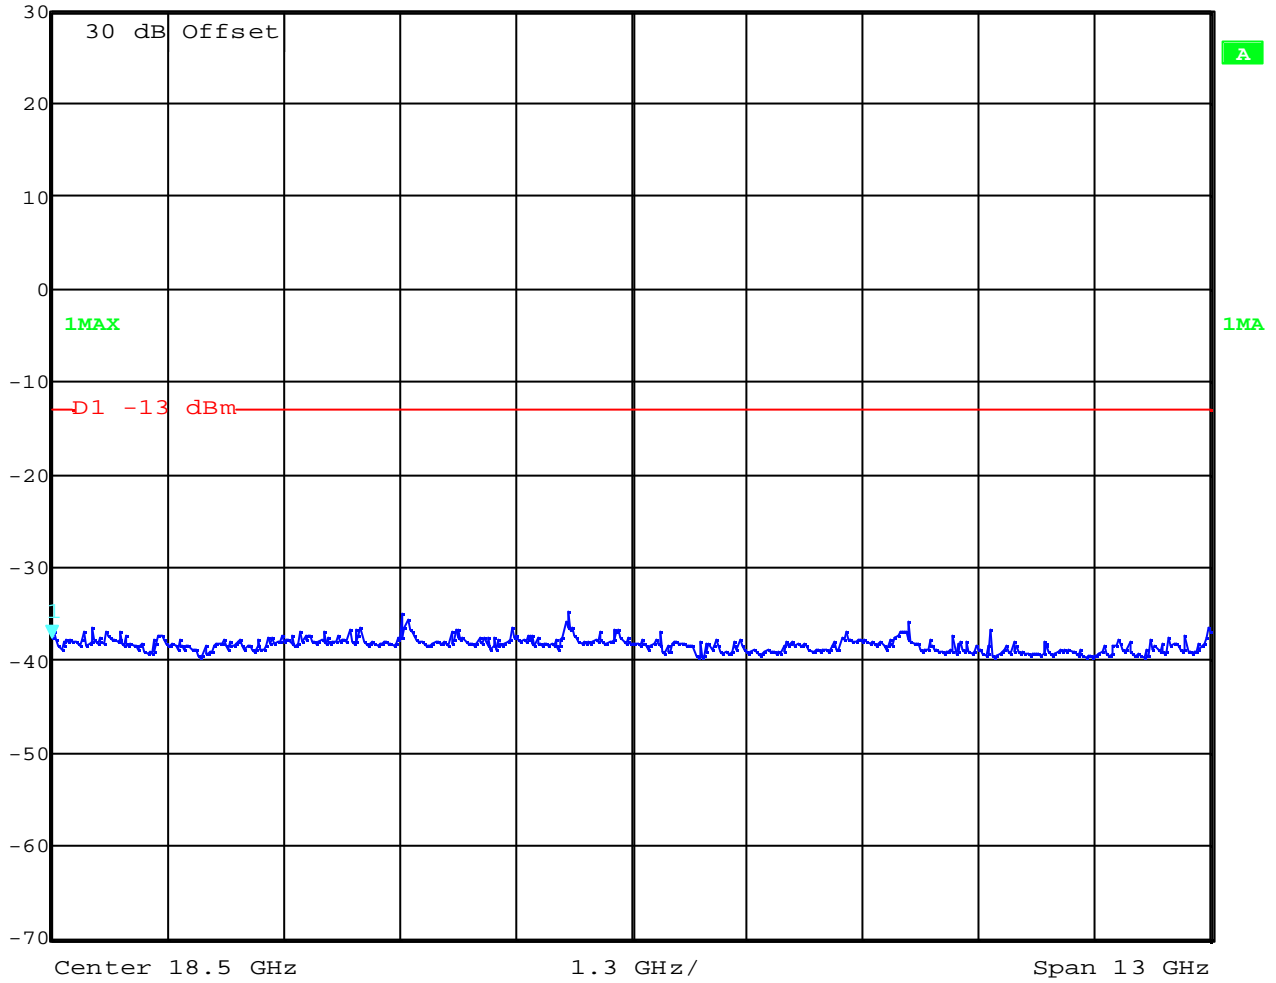

Date: 7.JAN.2004 14:17:07

Channel 251 (up to 4 GHz)

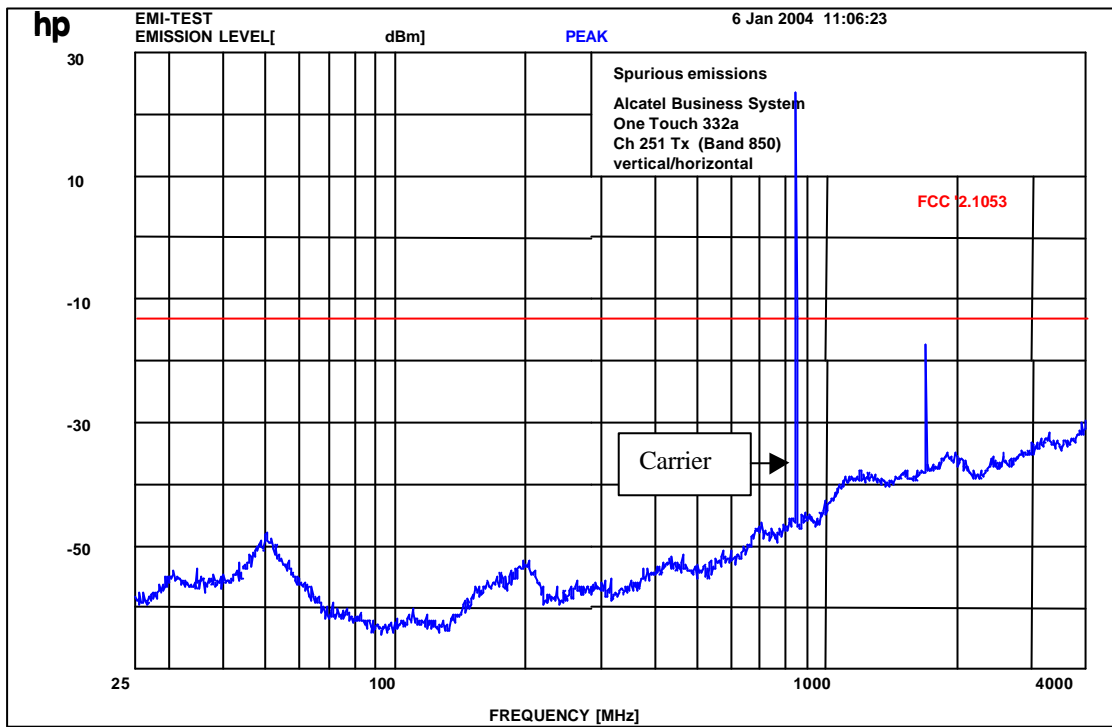

f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW/VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

## Channel 251 (up to 12 GHz)

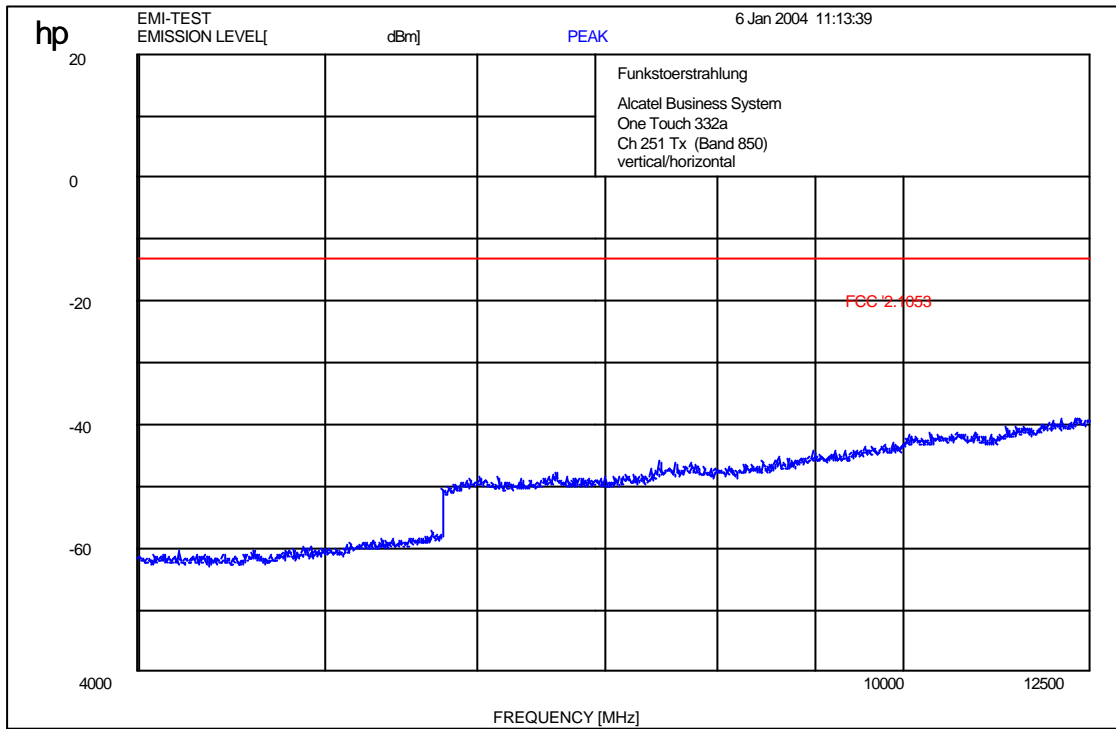

f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW/VBW 1 MHz


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

## Channel 251 (up to 25 GHz)

	Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	30 dBm	-36.75 dBm	VBW	1 MHz		
		12.00000000 GHz	SWT	74 ms	Unit	dBm

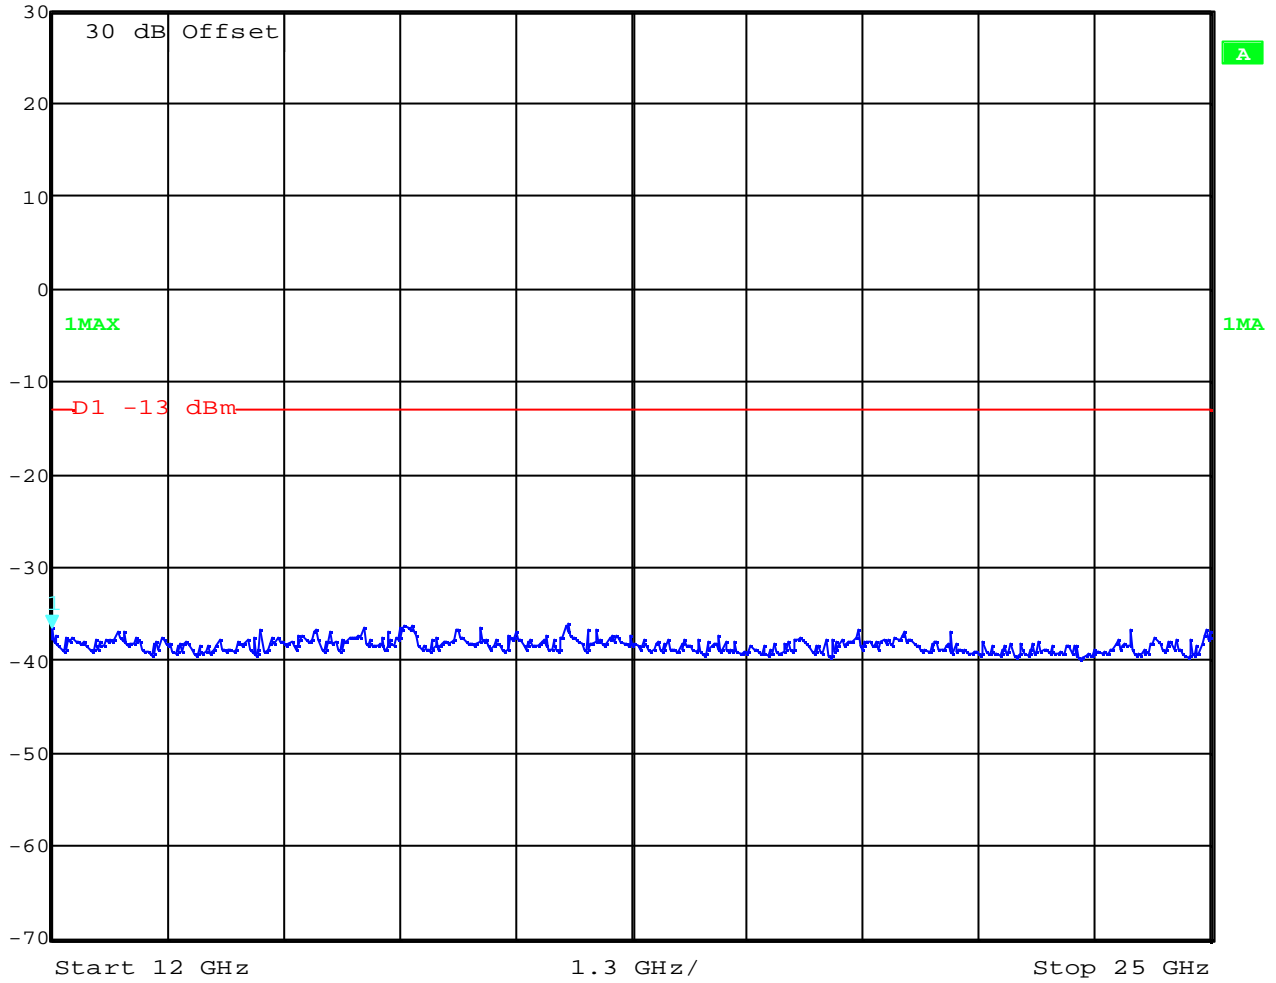

Date: 7.JAN.2004 14:20:03

**RECEIVER SPURIOUS RADIATION**  
**Radiated**

§ 15.109

SPURIOUS EMISSIONS LEVEL ( $\mu\text{V/m}$ )								
CH 128,189,251								
f (MHz)	Detector	Level ( $\mu\text{V/m}$ )	f (MHz)	Detector	Level ( $\mu\text{V/m}$ )	f (MHz)	Detector	Level ( $\mu\text{V/m}$ )
<b>Measurement uncertainty</b>			<b><math>\pm 3</math> dB</b>					

f < 1 GHz : RBW/VBW: 100 kHz

f ? 1GHz : RBW/VBW: 1 MHz

H = Horizontal ; V= Vertical

Measurement distance see table

**Limits**

SUBCLAUSE § 15.109


Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

## Part 15.209 Magnetics

### Idle Mode (9 kHz up to 30 MHz )

EUT: One touch 332a  
 Manufacturer: Alcatel  
 Operating Condition: Idle mode  
 Test Site: Cetecom, Room 6  
 Operator: Gillmann  
 Comment: 115V / 60 Hz  
 Start of Test: 07.01.04 / 08:44:32

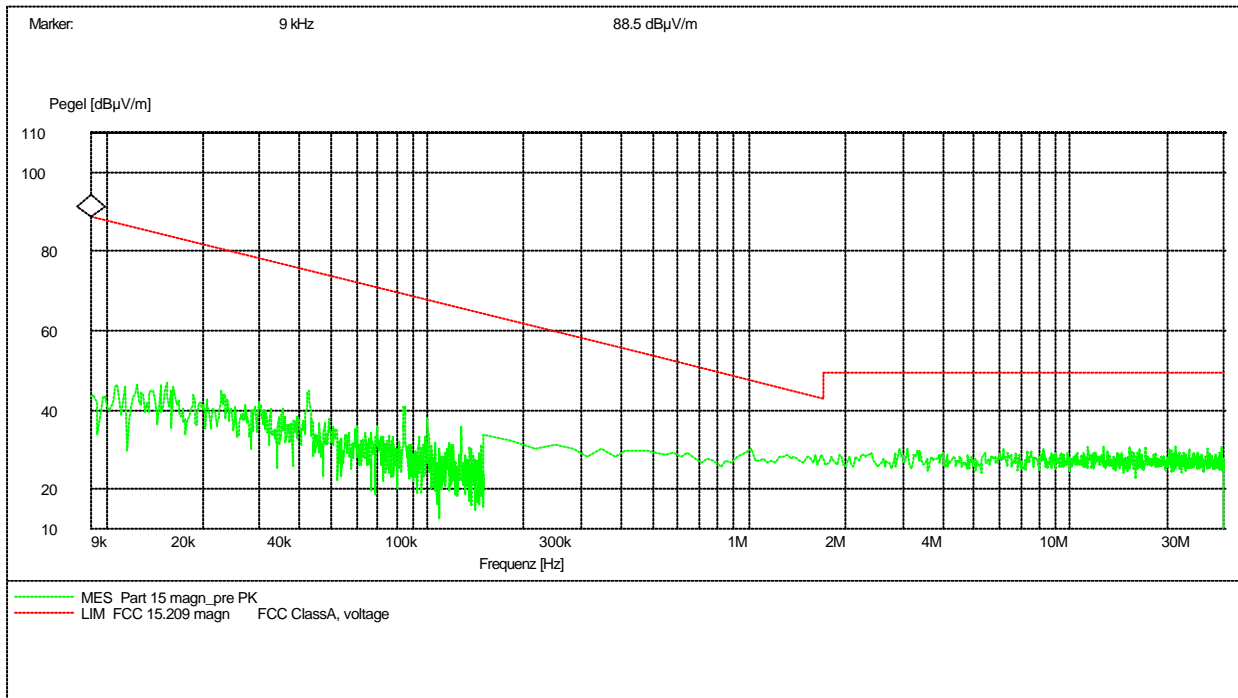

For peak measurement we use 100 kHz RBW/VBW  
 For CISPR QP measurement we use 200 Hz from 9 kHz to 150kHz  
 9 kHz from 150 kHz to 30 MHz

### Limits

### SUBCLAUSE § 15.109


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

**Idle-Mode (this is valid for all channels and up to 4 GHz)**

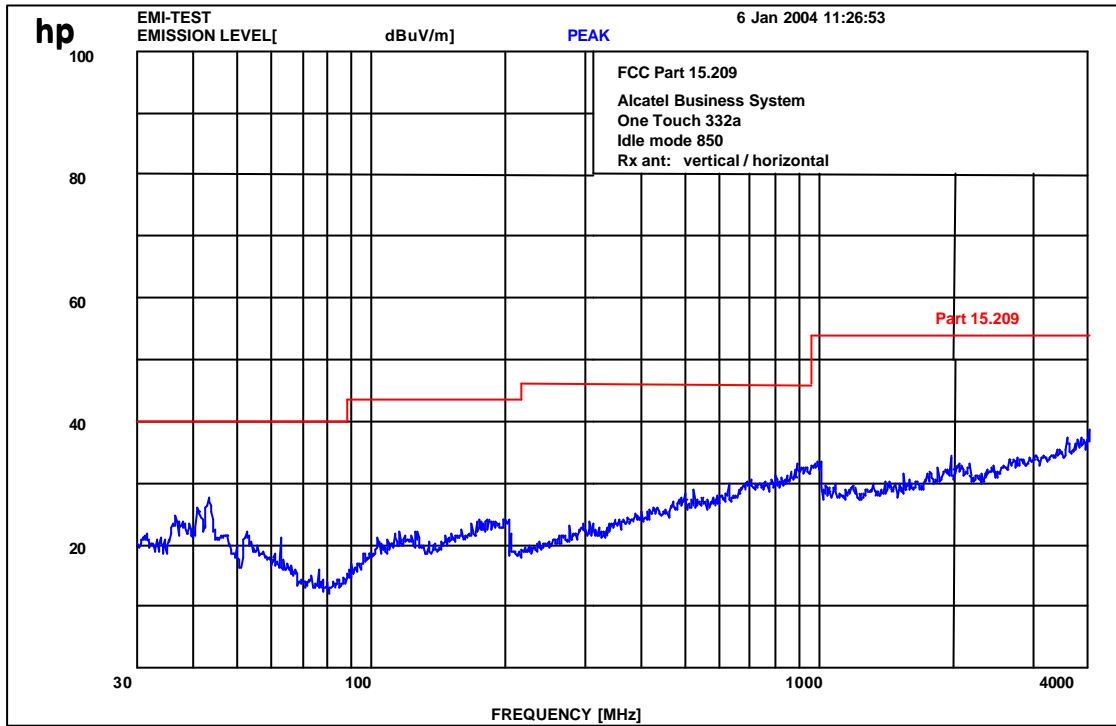


f < 1 GHz : RBW/VBW: 100 kHz

f > 1GHz : RBW/VBW 1 MHz

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)  
17 – 24, 64



### Idle-Mode (this is valid for all channels and up to 12 GHz)

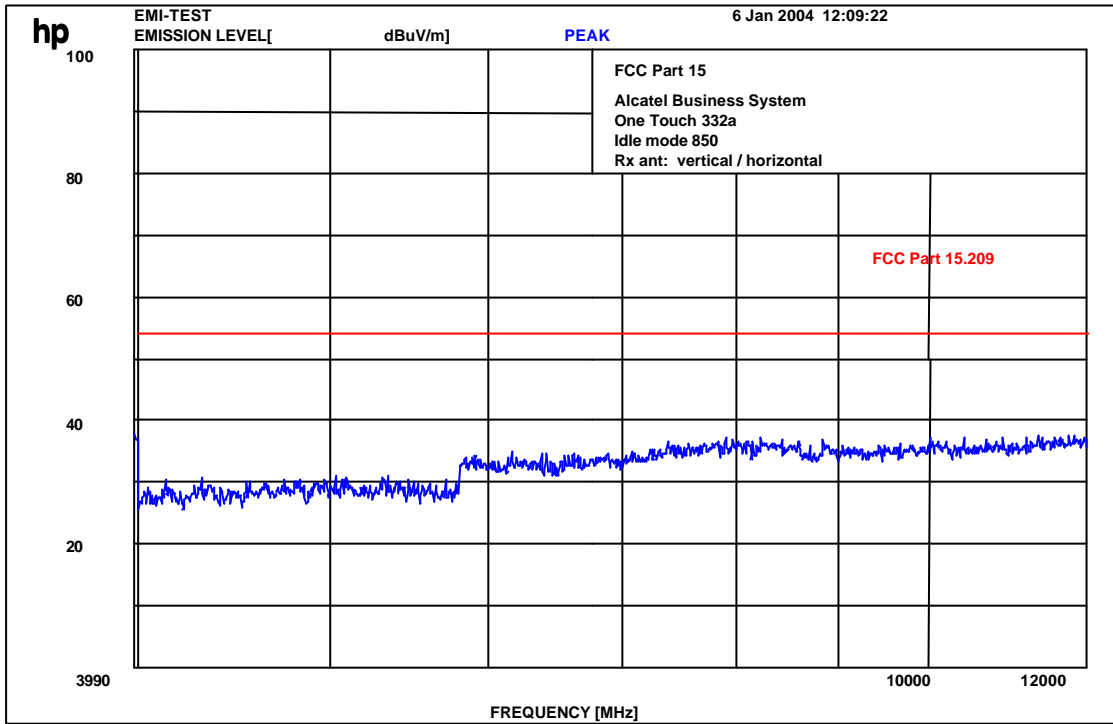

f < 1 GHz : RBW/VBW: 100 kHz

f ? 1GHz : RBW/VBW 1 MHz


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

**Idle-Mode (this is valid for all 3 channels and up to 25 GHz)**

	Ref Lvl	Marker 1 [T1]	RBW	3 MHz	RF Att	0 dB
	87 dB*	37.53 dB $\mu$ V/m	VBW	3 MHz		
		25.00000000 GHz	SWT	74 ms	Unit	dB $\mu$ V/m

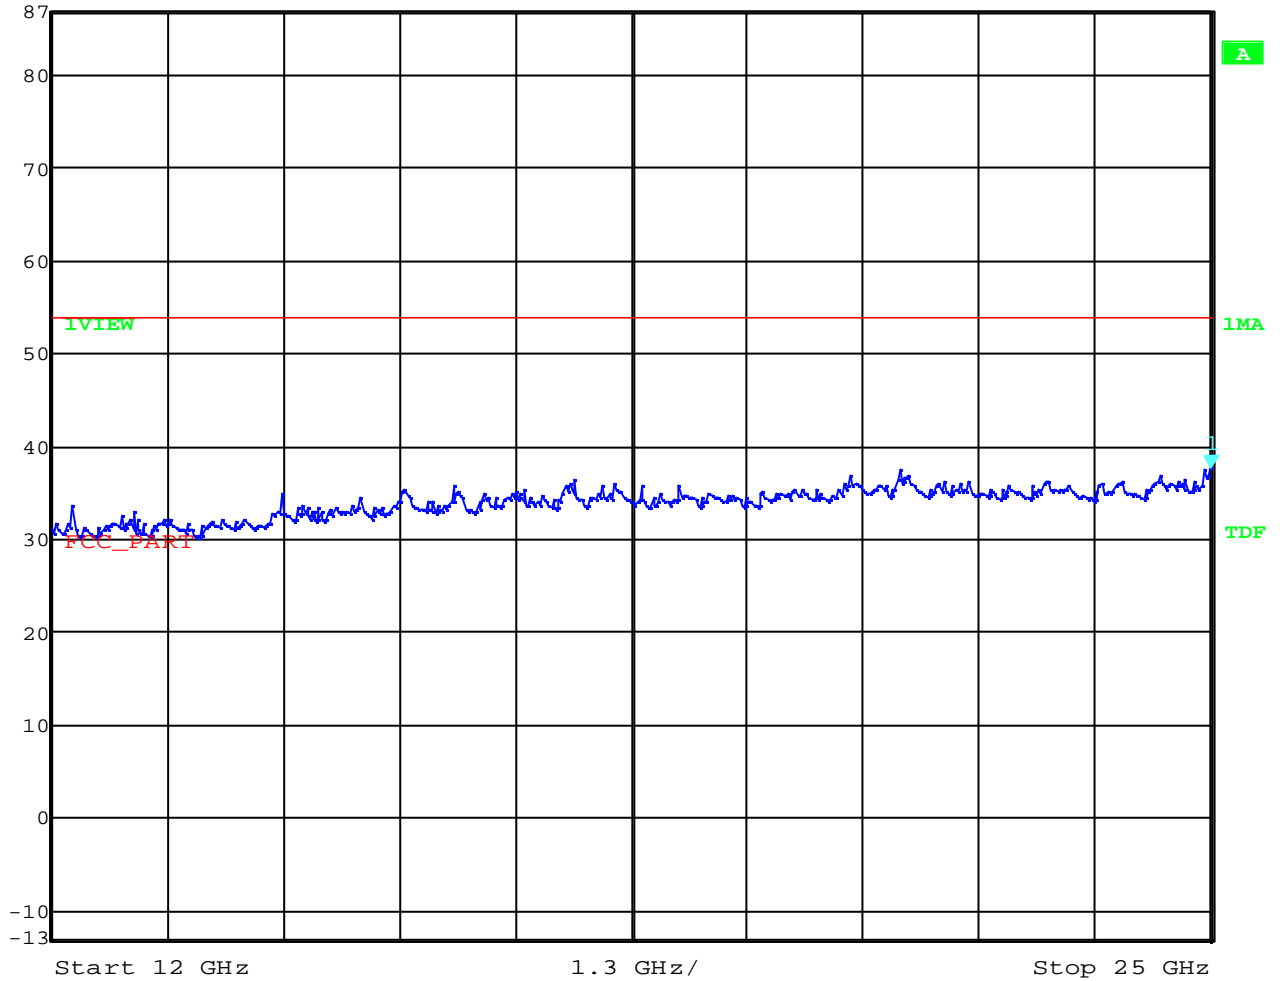

Date: 6.JAN.2004 10:55:50

## CONDUCTED SPURIOUS EMISSIONS

### Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

### USPCS Transmitter

#### Channel Frequency

128 824.2 MHz

189 836.2 MHz

251 848.8 MHz

### Measurement Limit:


Sec. 24.238 Emission Limits.


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

<b>EMISSION LIMITATIONS</b>					
<b>f (MHz)</b>		<b>amplitude of emission (dBm)</b>	<b>limit max. allowed emission power (dBm)</b>	<b>actual attenuation below frequency of operation (dBc)</b>	<b>results</b>
<b>CH 128</b>					
<b>824.200</b>		<b>24.30</b>	<b>-13.0 (37.3 dBc)</b>		<b>carrier</b>
<b>823.000</b>		<b>- 25.12</b>		<b>49.42</b>	<b>carrier</b>
<b>823.995</b>		<b>- 13.96</b>		<b>38.26</b>	<b>complies</b>
<b>5 0911.000</b>		<b>- 34.74</b>		<b>59.04</b>	
<b>CH 189</b>					
<b>836.4</b>		<b>24.30</b>	<b>-13.0 (37.3 dBc)</b>		<b>carrier</b>
<b>835.0</b>		<b>- 27.62</b>		<b>51.92</b>	<b>carrier</b>
<b>5 872.0</b>		<b>- 35.32</b>		<b>59.62</b>	<b>complies</b>
<b>CH 251</b>					
<b>848.800</b>		<b>23.90</b>	<b>-13.0 (36.9 dBc)</b>		<b>carrier</b>
<b>847.000</b>		<b>- 32.88</b>		<b>56.78</b>	<b>carrier</b>
<b>849.014</b>		<b>- 15.87</b>		<b>39.77</b>	<b>carrier</b>
<b>6 560.000</b>		<b>- 33.65</b>		<b>57.55</b>	<b>complies</b>
<b>Measurement uncertainty</b>			<b>± 0.5dB</b>		



## Channel 128

 Marker 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl -13.96 dBm VBW 3 kHz  
29.7 dBm 823.99599198 MHz SWT 280 ms Unit dBm

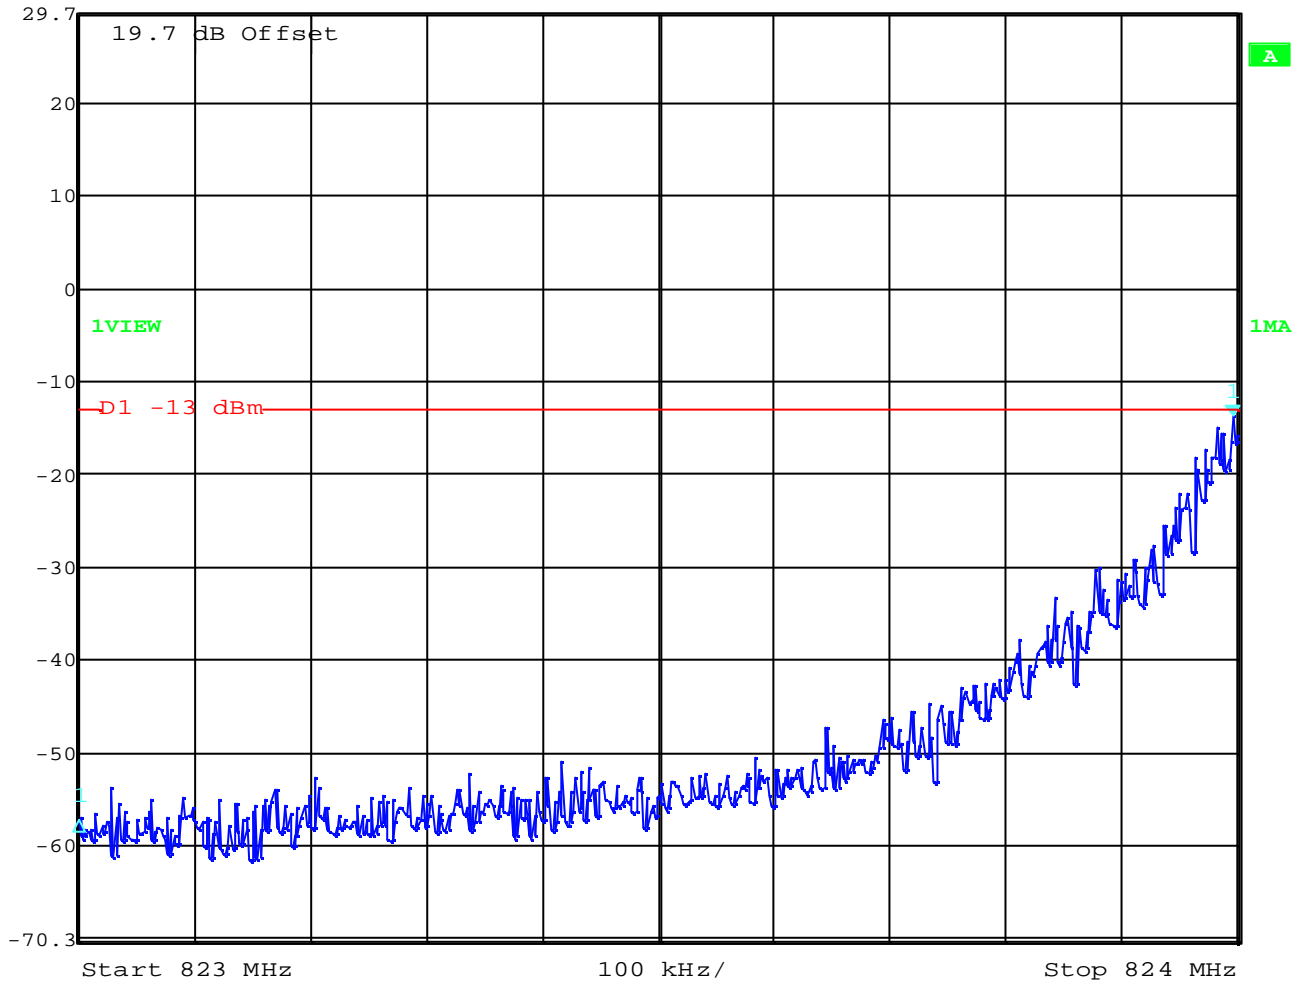


Date: 8.JAN.2004 08:48:29

Channel 128




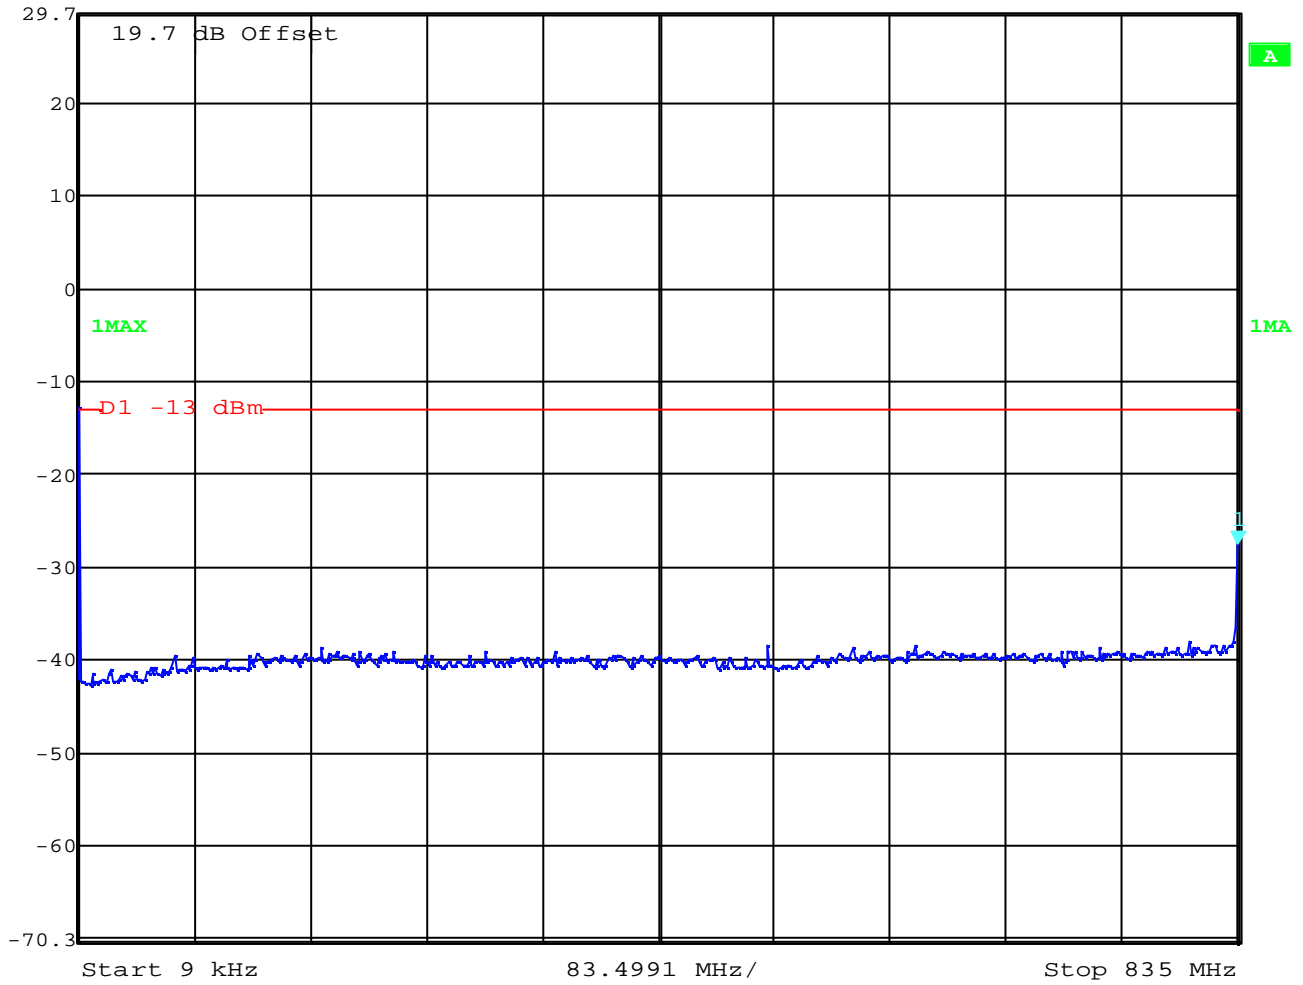
Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-34.74 dBm	VBW	100 kHz	
29.7 dBm	5.91192385 GHz	SWT	6.2 s	Unit dBm

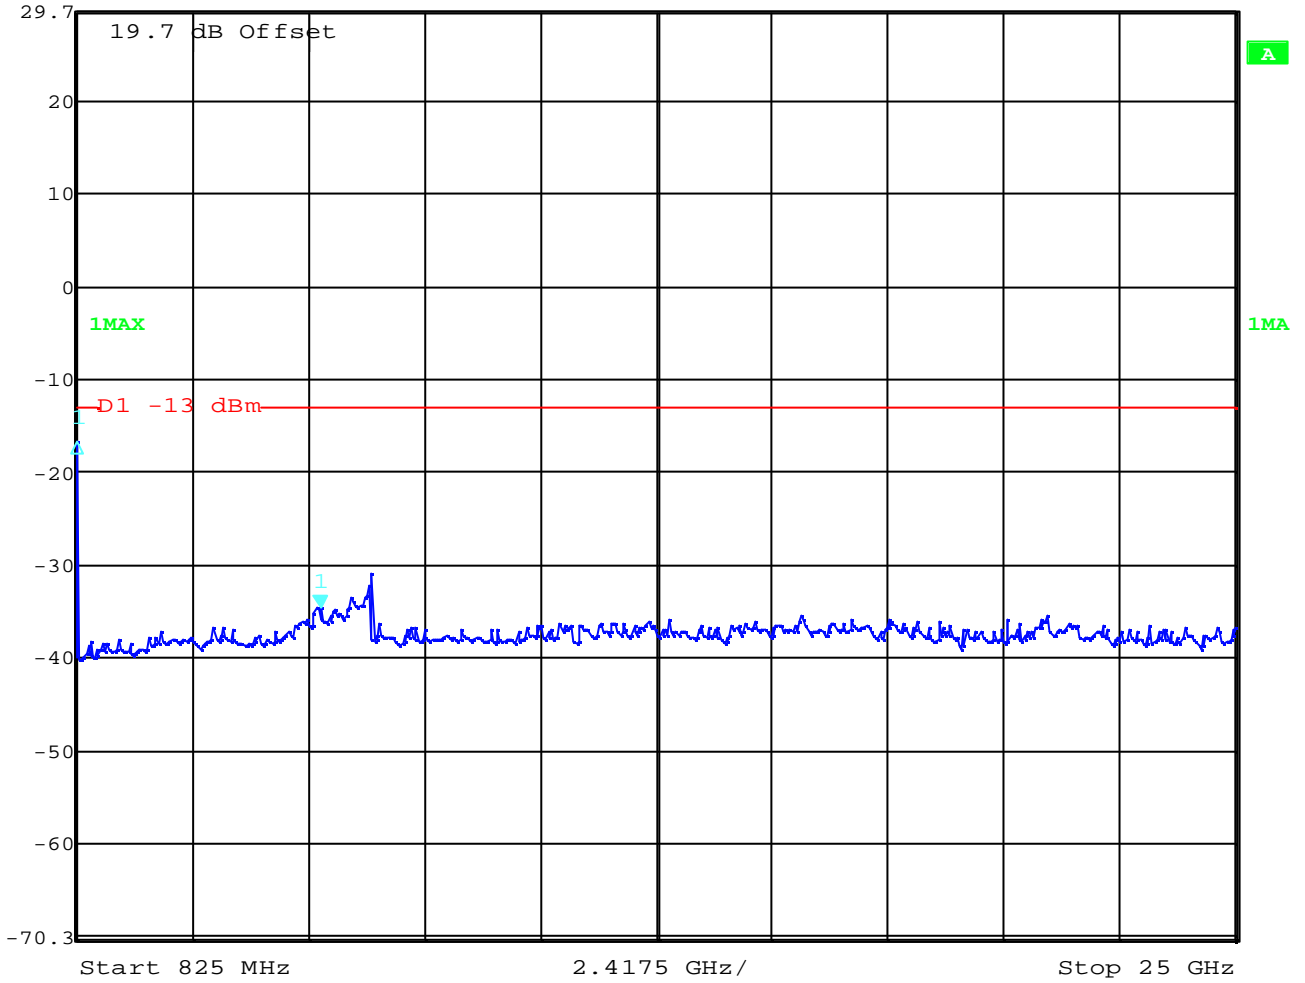

Date: 8.JAN.2004 08:51:40


## Channel 189


 Marker 1 [T1] RBW 100 kHz RF Att 30 dB  
Ref Lvl -27.62 dBm VBW 100 kHz  
29.7 dBm 835.0000000 MHz SWT 210 ms Unit dBm



Date: 8.JAN.2004 09:11:12

## Channel 189


 Marker 1 [T1] RBW 100 kHz RF Att 30 dB  
Ref Lvl -35.32 dBm VBW 100 kHz  
29.7 dBm 5.87297595 GHz SWT 6.2 s Unit dBm

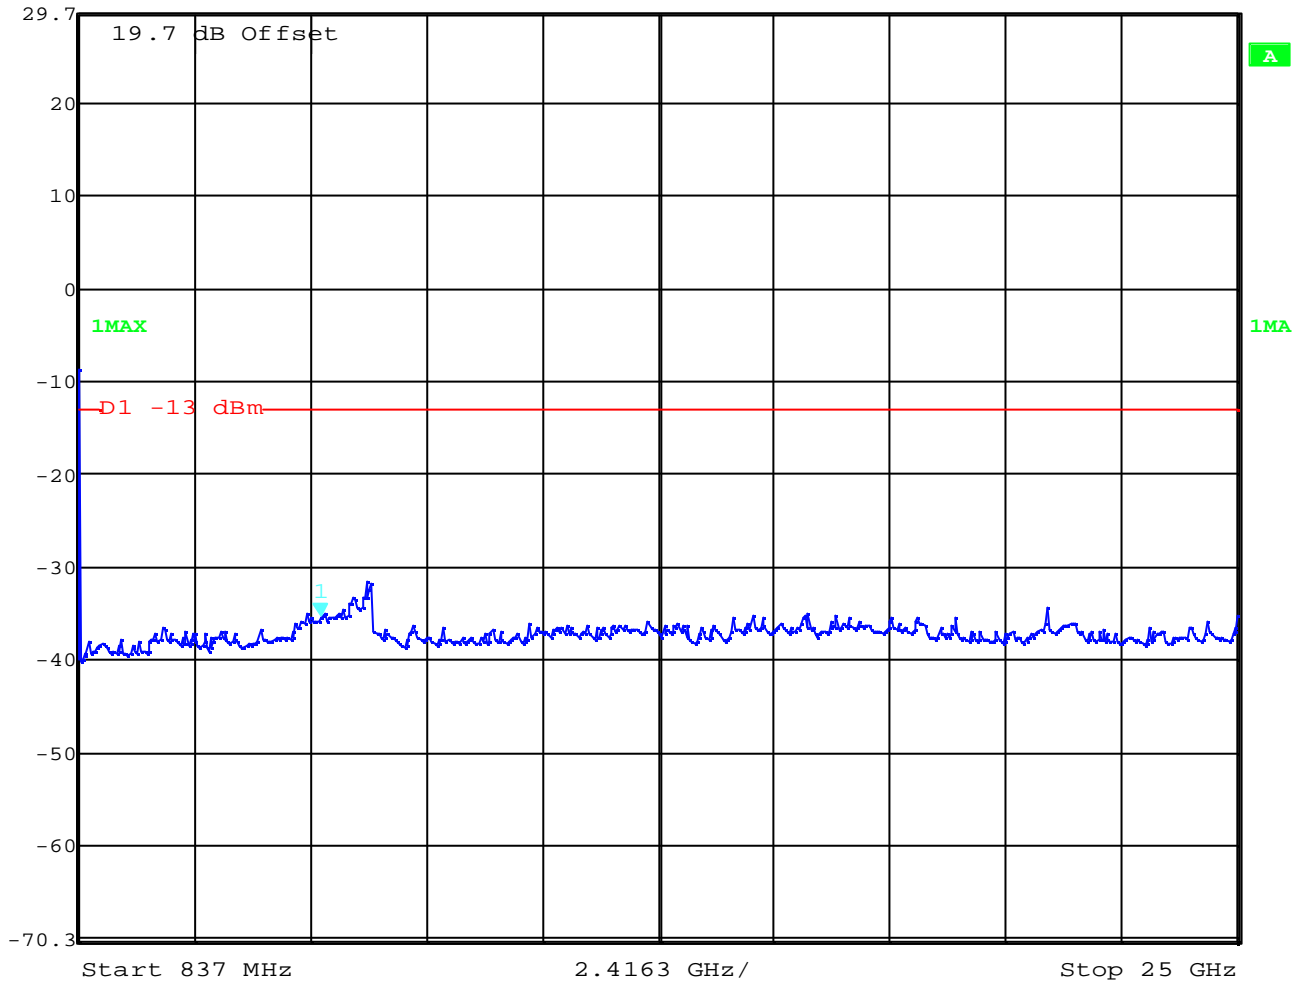


Date: 8.JAN.2004 09:20:11



## Channel 251

 Marker 1 [T1] RBW 100 kHz RF Att 30 dB  
Ref Lvl -32.88 dBm VBW 100 kHz  
29.7 dBm 847.0000000 MHz SWT 215 ms Unit dBm

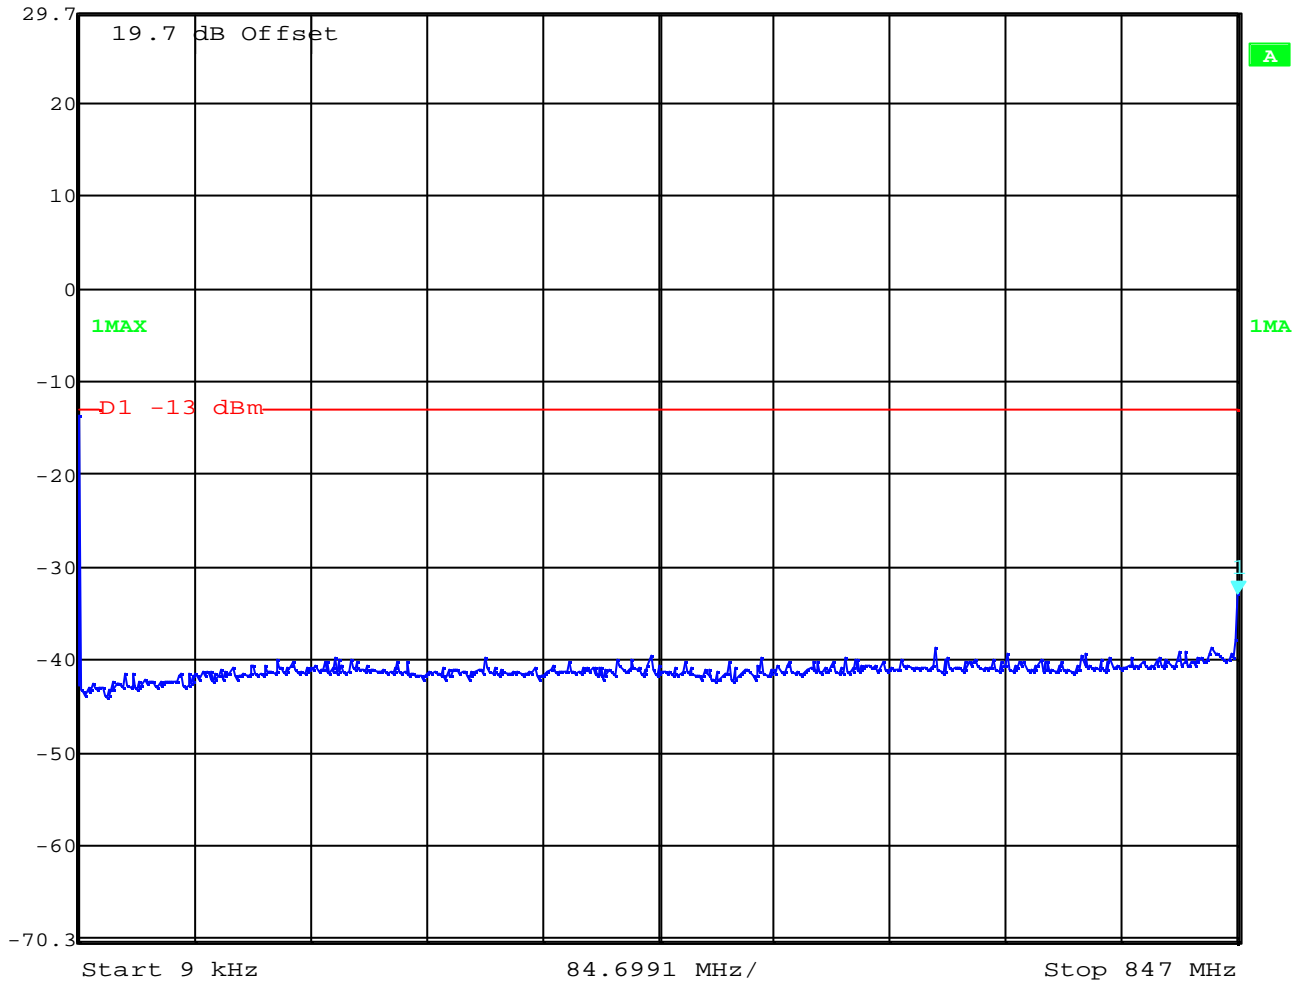

Date: 8.JAN.2004 09:22:17

## Channel 251



Marker 1 [T1]


RBW 3 kHz RF Att 30 dB

Ref Lvl -15.87 dBm

VBW 3 kHz


29.7 dBm 849.01402806 MHz


SWT 280 ms Unit dBm

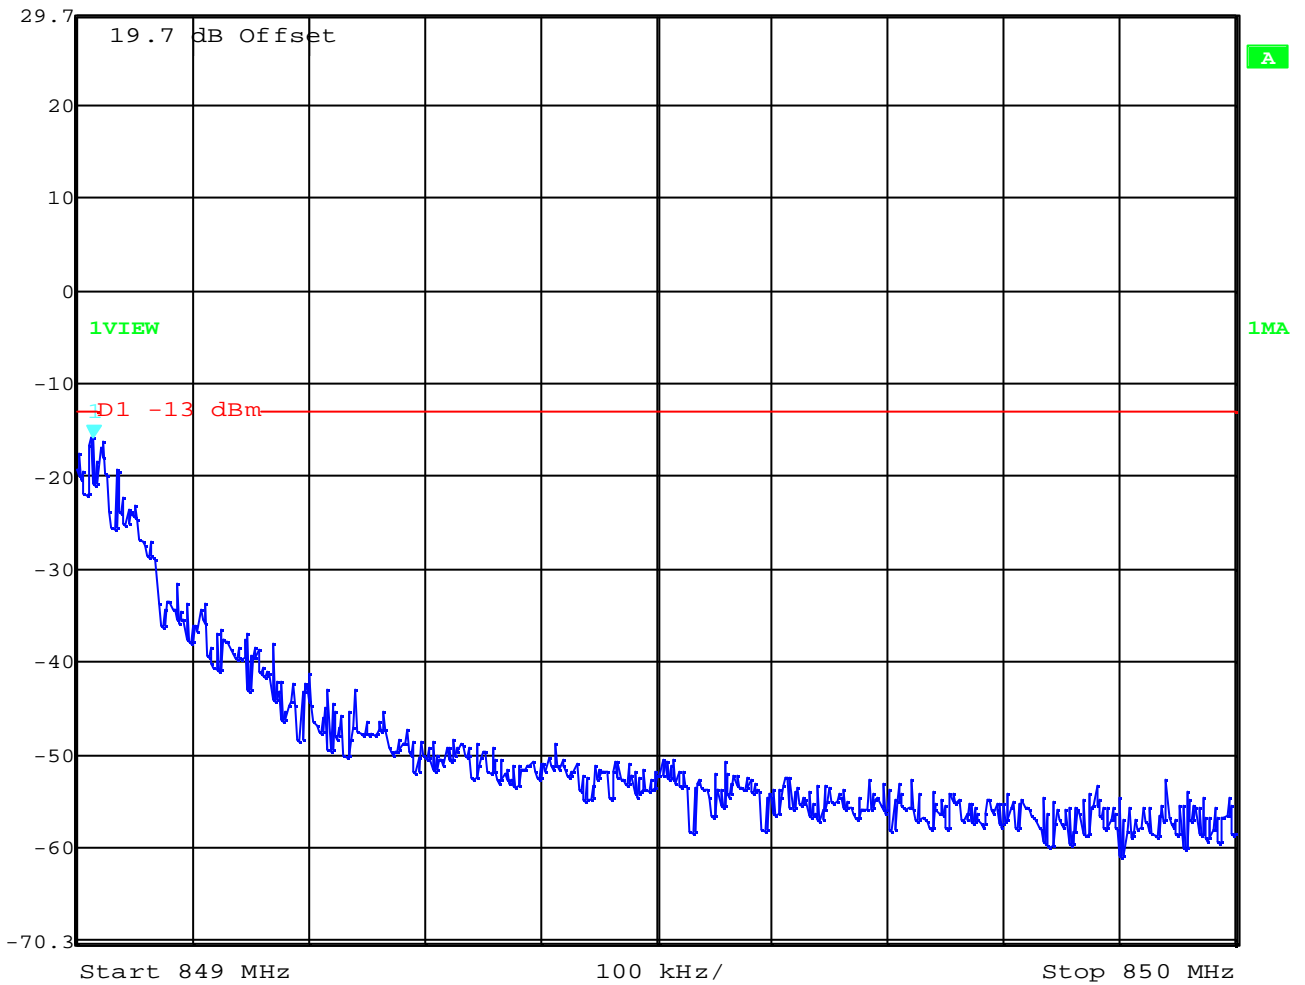

Date: 8.JAN.2004 09:25:21

## Channel 251

 Marker 1 [T1] RBW 100 kHz RF Att 30 dB  
Ref Lvl -33.65 dBm VBW 100 kHz  
29.7 dBm 6.56082164 GHz SWT 6.2 s Unit dBm

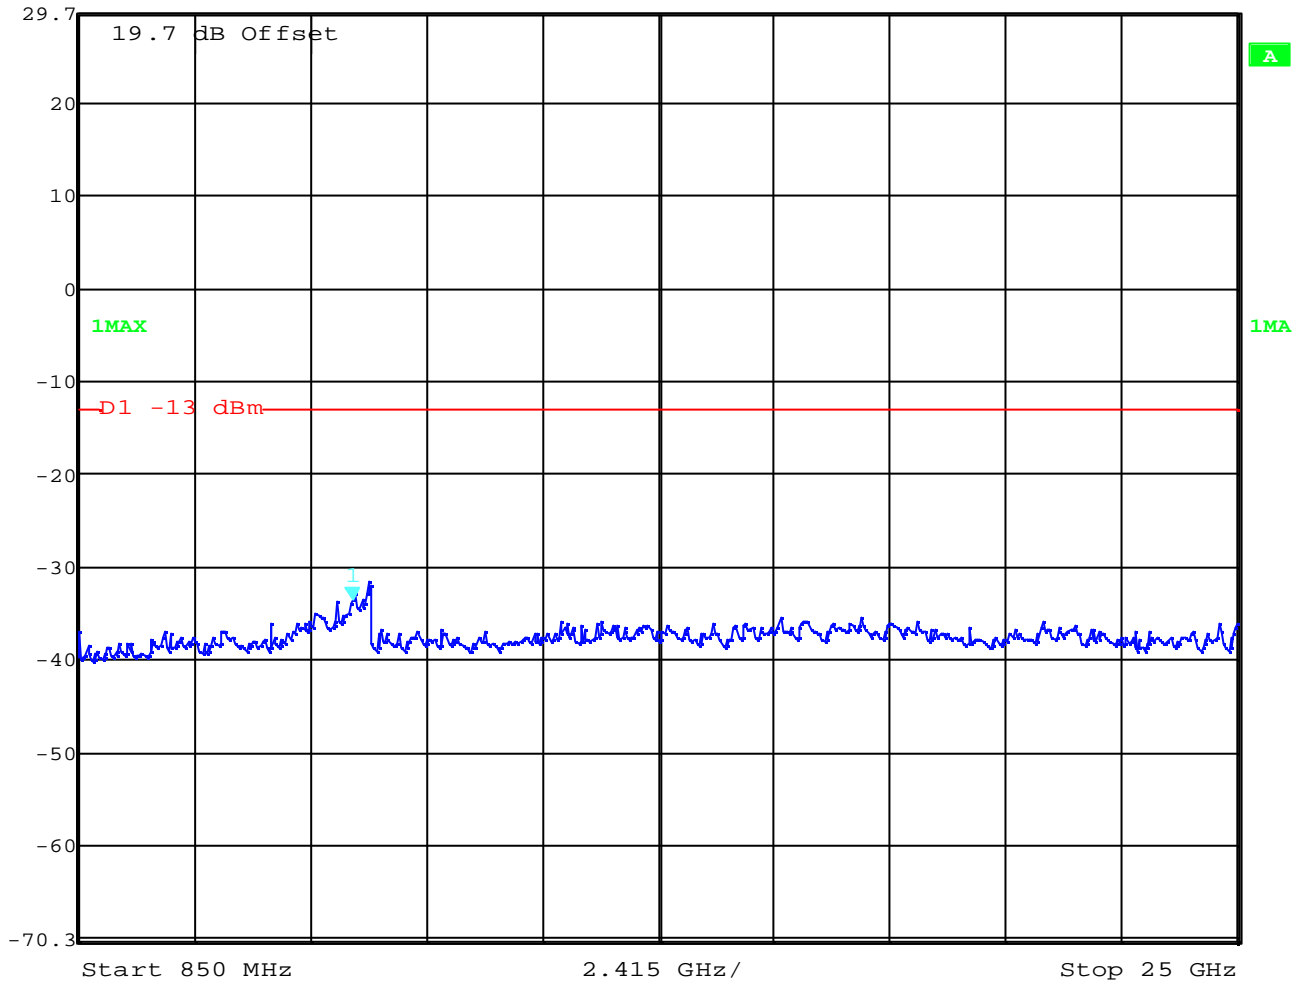

Date: 8.JAN.2004 09:27:25

## BLOCK EDGE REQUIREMENTS

### Measurement Limit:


Sec. 22.917(b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### Measurements:

#### Block 1 Channel 128

	Marker 1 [T1]	RBW	3 kHz	RF Att	30 dB	
	Ref Lvl	-13.96 dBm	VBW	3 kHz		
	29.7 dBm	823.99599198 MHz	SWT	280 ms	Unit	dBm

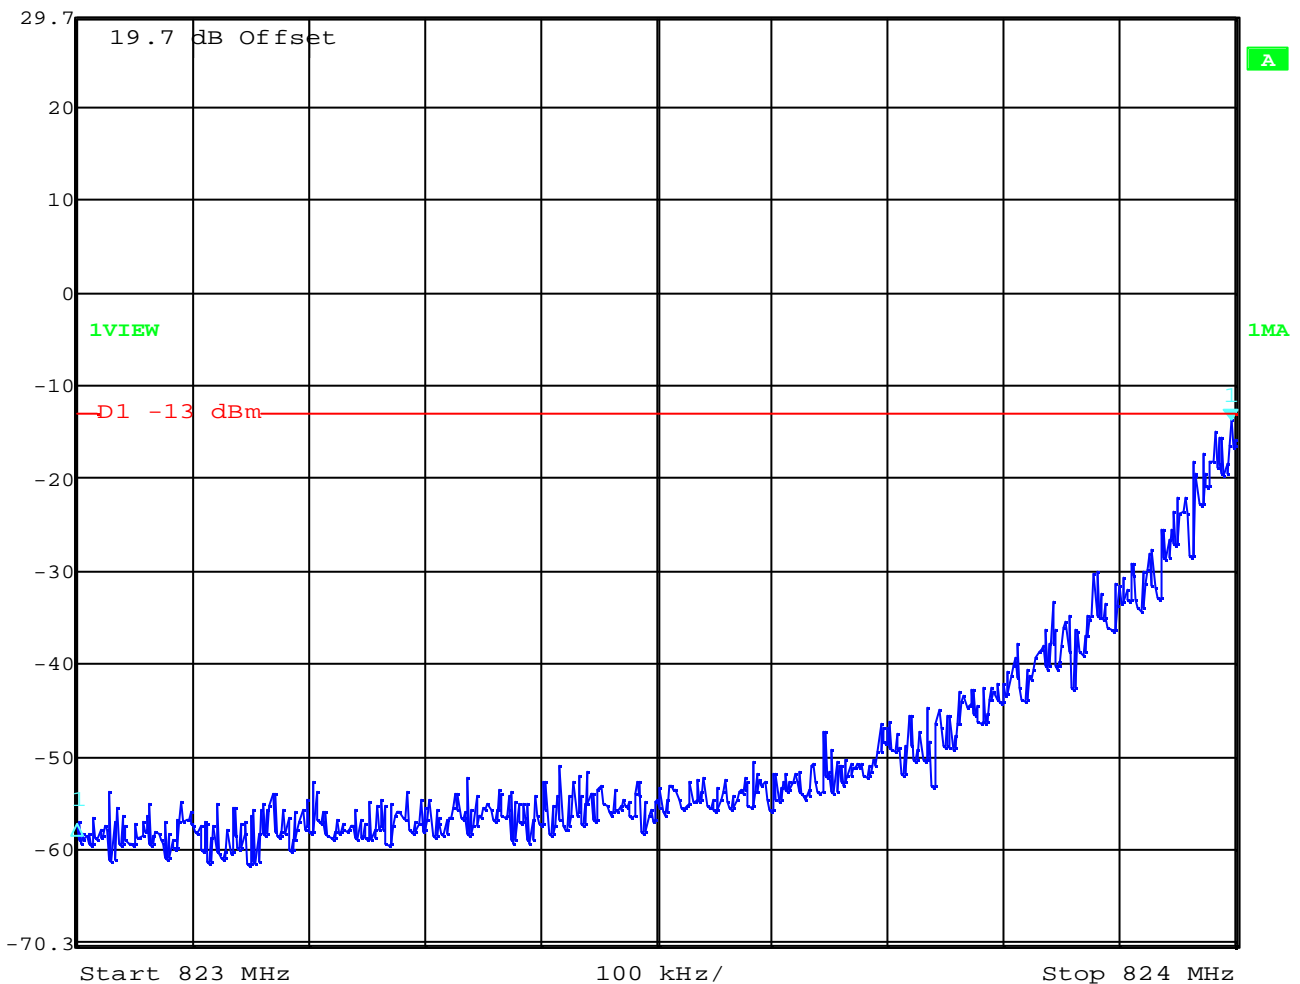

Date: 8.JAN.2004 08:48:29

## Block 4 Channel 251



Marker 1 [T1]


RBW 3 kHz RF Att 30 dB

Ref Lvl -15.87 dBm

VBW 3 kHz

29.7 dBm 849.01402806 MHz

SWT 280 ms Unit dBm

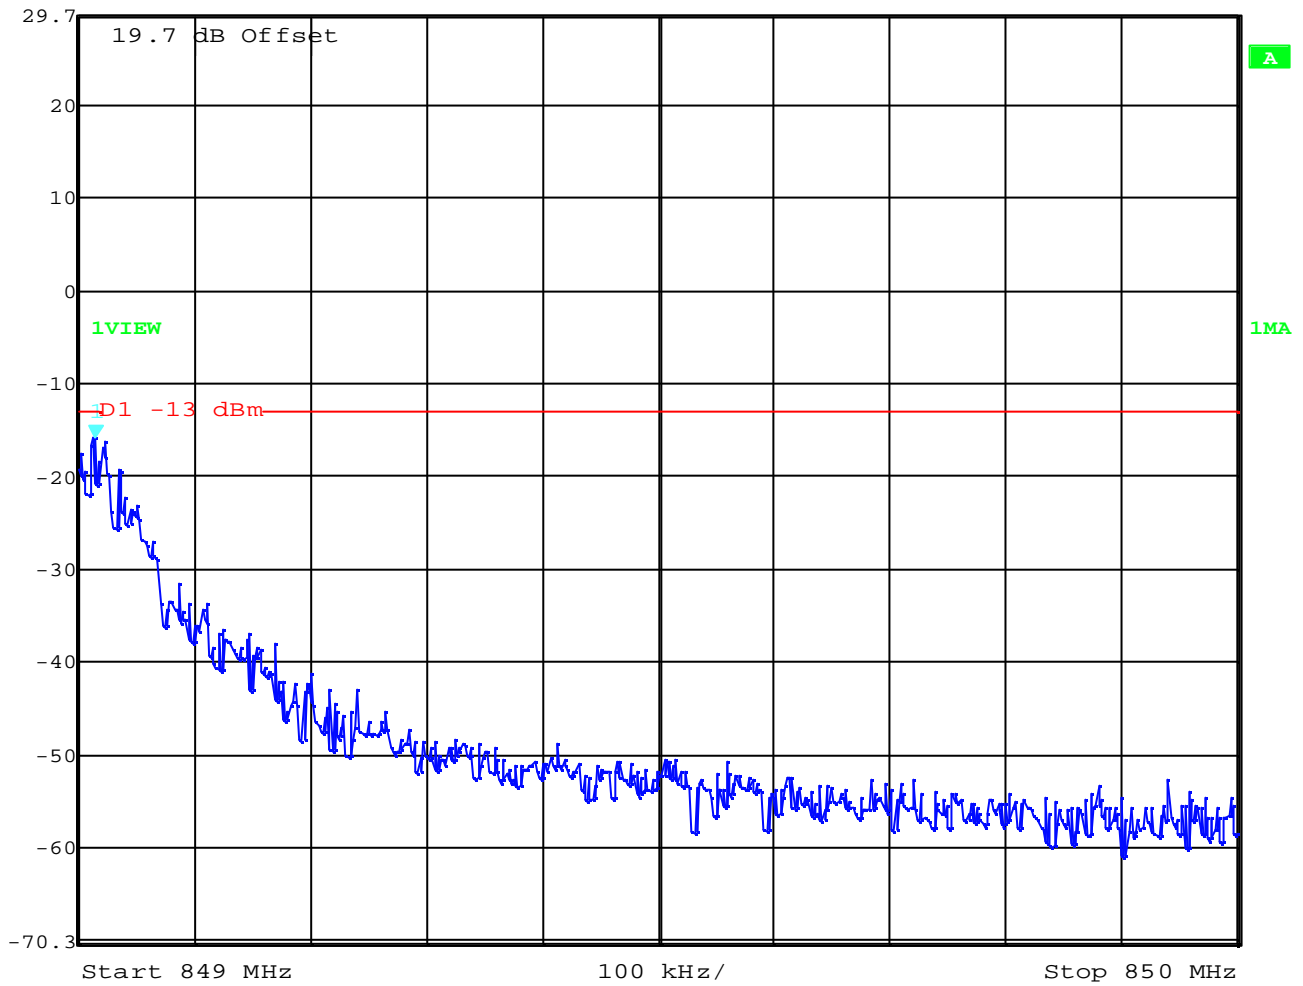

Date: 8.JAN.2004 09:25:21

## **OCCUPIED BANDWIDTH**

**§2.989**


### **Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

<b>Frequency</b>	<b>99% Occupied Bandwidth</b>	<b>-26 dBc Bandwidth</b>
<b>824.2 MHz</b>	<b>272.545 kHz</b>	<b>312.625 kHz</b>
<b>836.4 MHz</b>	<b>280.561 kHz</b>	<b>316.633 kHz</b>
<b>848.8 MHz</b>	<b>272.545 kHz</b>	<b>312.625 kHz</b>

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 299 kHz, this equates to a resolution bandwidth of at least 3 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

## Channel 128 99% Occupied Bandwidth


 Delta 1 [T1]      RBW    3 kHz    RF Att    30 dB  
Ref Lvl                      -0.67 dB    VBW    3 kHz  
25.6 dBm                    272.54509018 kHz    SWT    280 ms    Unit            dBm

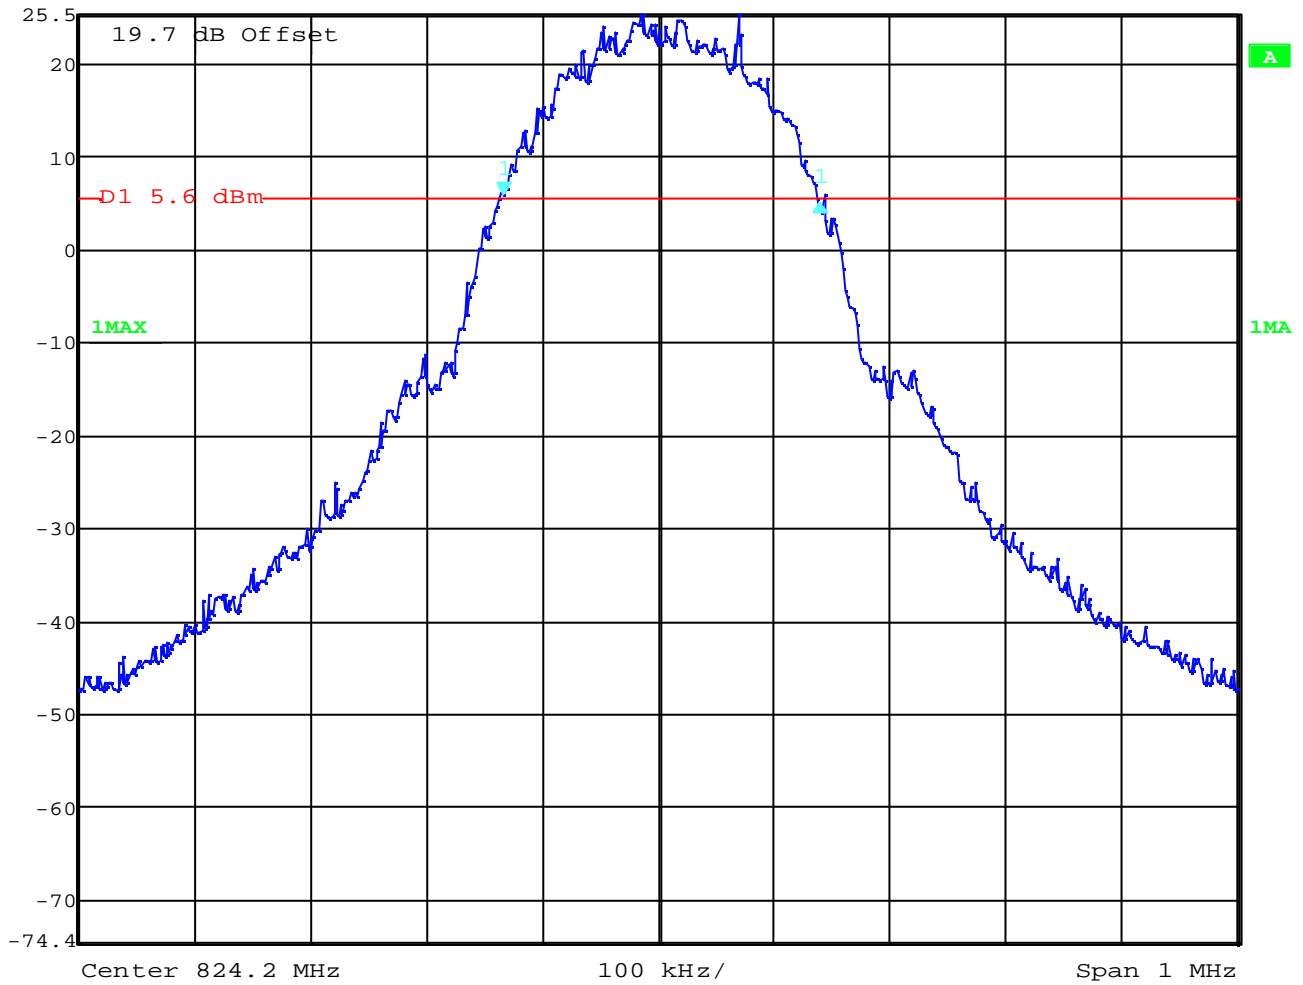

Date:            8.JAN.2004    09:34:57

## Channel 128 -26 dBc Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-0.67 dB	VBW	3 kHz	
	25.6 dBm	312.62525050 kHz	SWT	280 ms	Unit

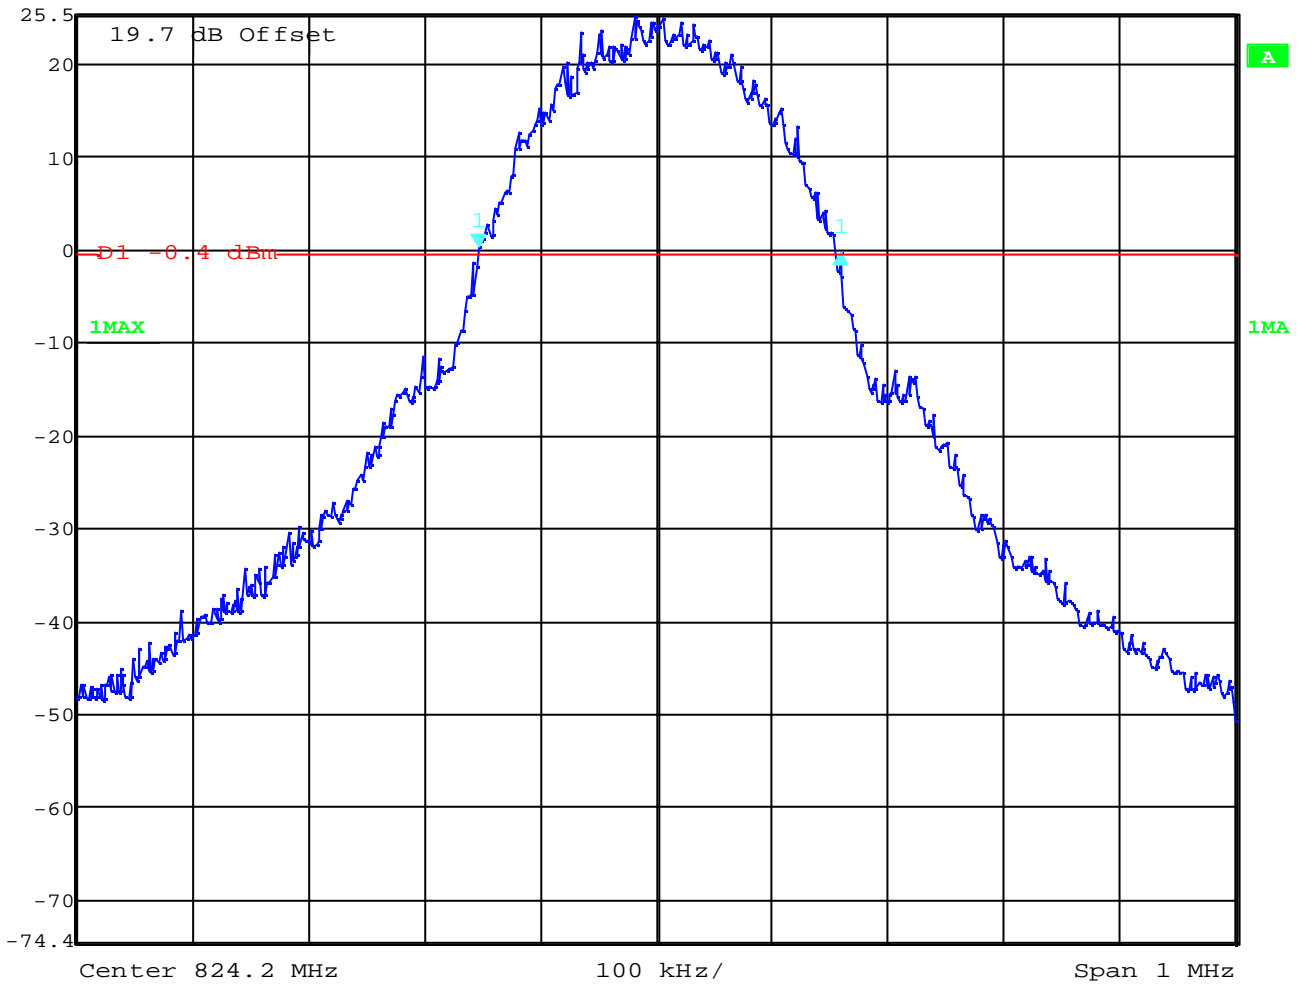


Date: 8.JAN.2004 09:38:31



## Channel 189 99% Occupied Bandwidth


	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-0.71 dB	VBW	3 kHz	
	24 dBm	280.56112224 kHz	SWT	280 ms	Unit

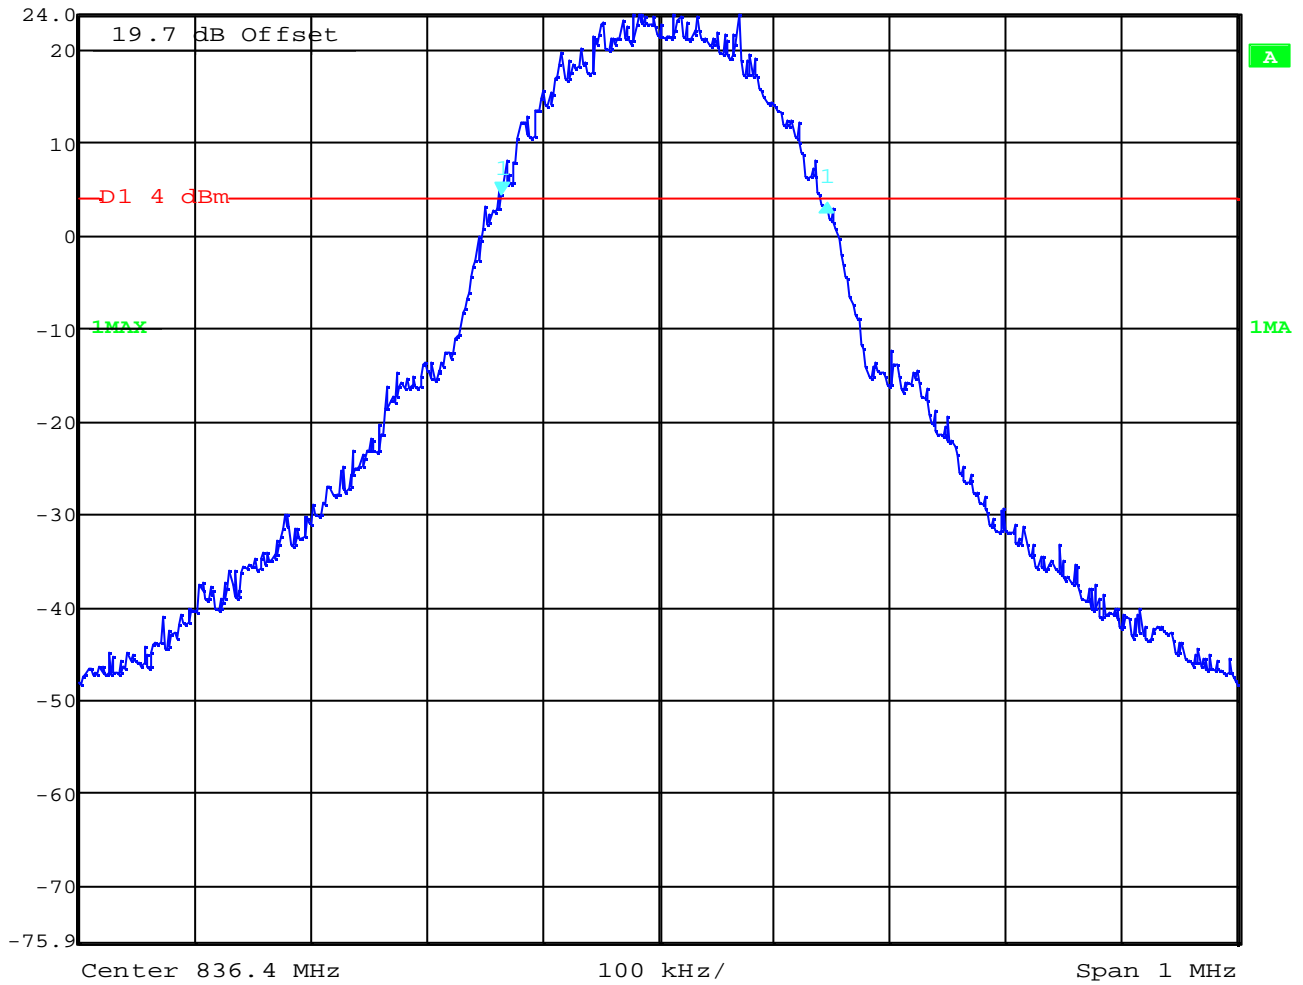

Date: 8.JAN.2004 09:41:36

## Channel 189 -26 dBc Bandwidth


	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	1.63 dB	VBW	3 kHz	
	24 dBm	316.63326653 kHz	SWT	280 ms	Unit

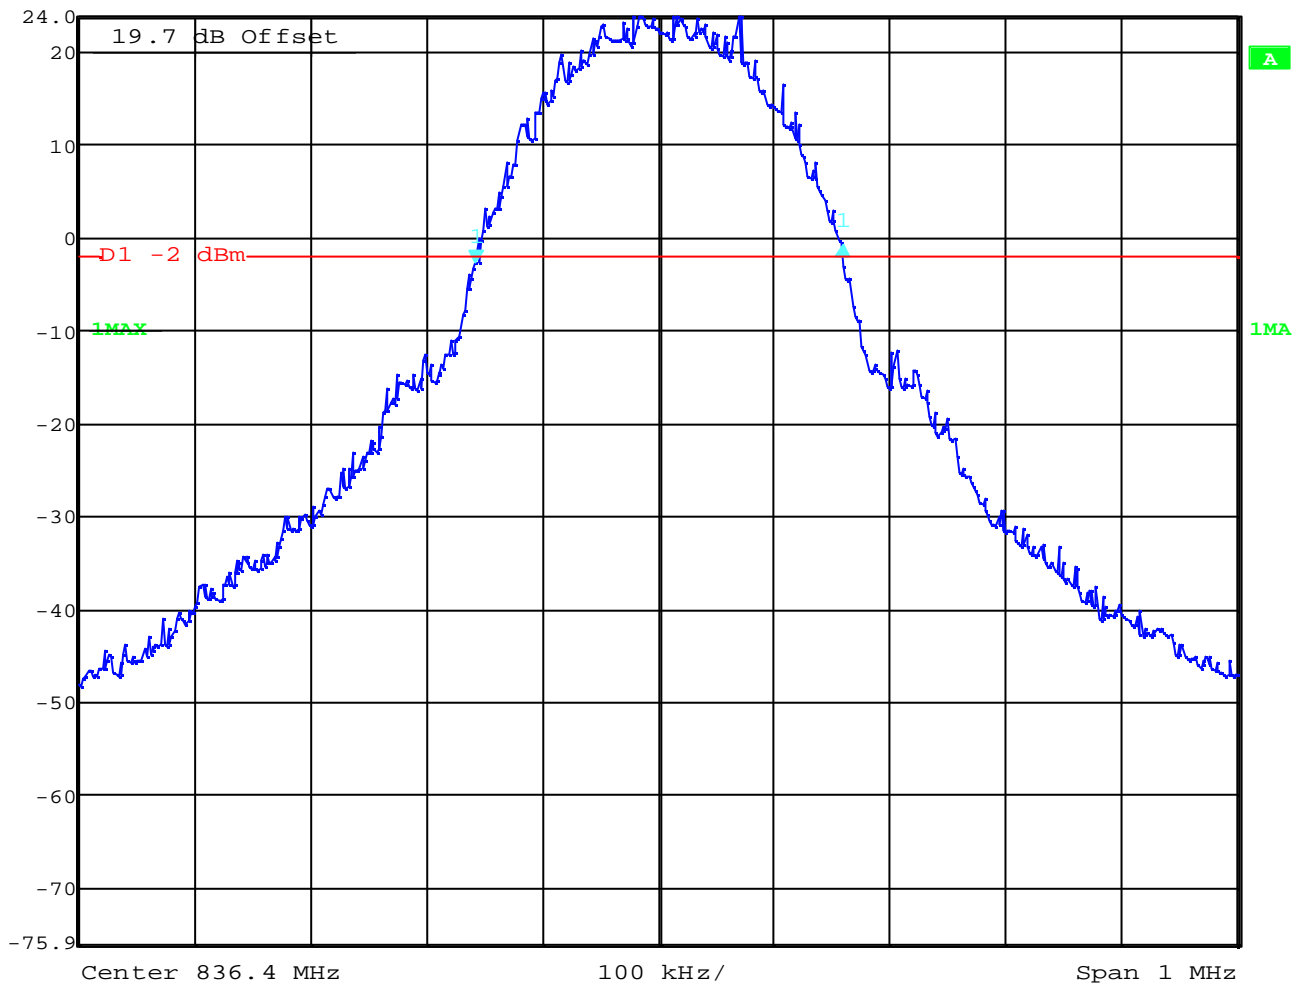

Date: 8.JAN.2004 09:42:30

## Channel 251 99% Occupied Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	-1.81 dB	VBW	3 kHz		
25.7 dBm	272.54509018 kHz	SWT	280 ms	Unit	dBm

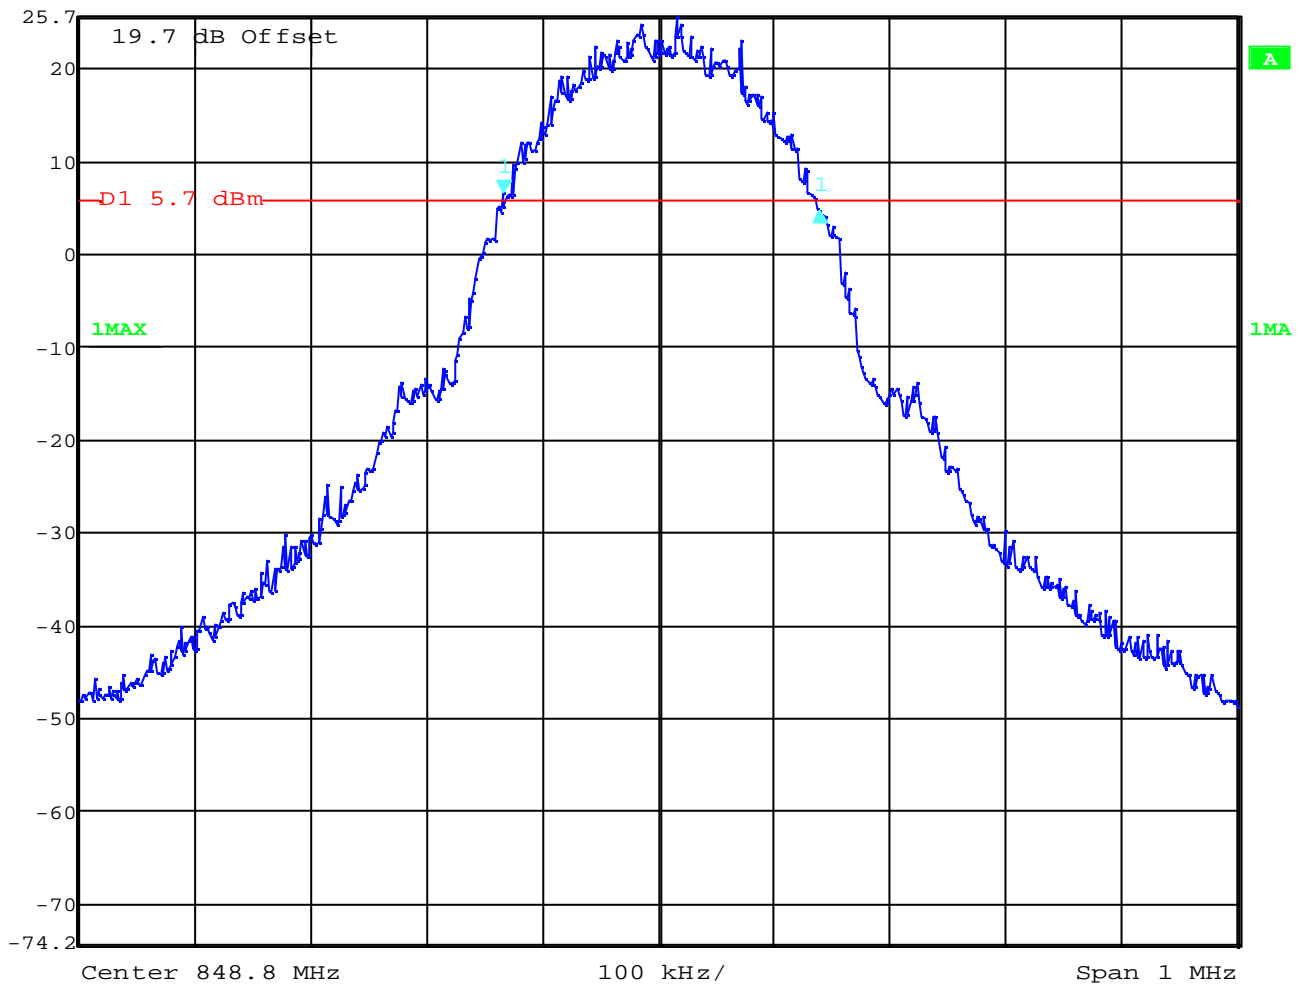


Date: 8.JAN.2004 09:45:24

## Channel 251 -26 dBc Bandwidth



	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	-2.30 dB	VBW	3 kHz		
25.7 dBm	312.62525050 kHz	SWT	280 ms	Unit	dBm

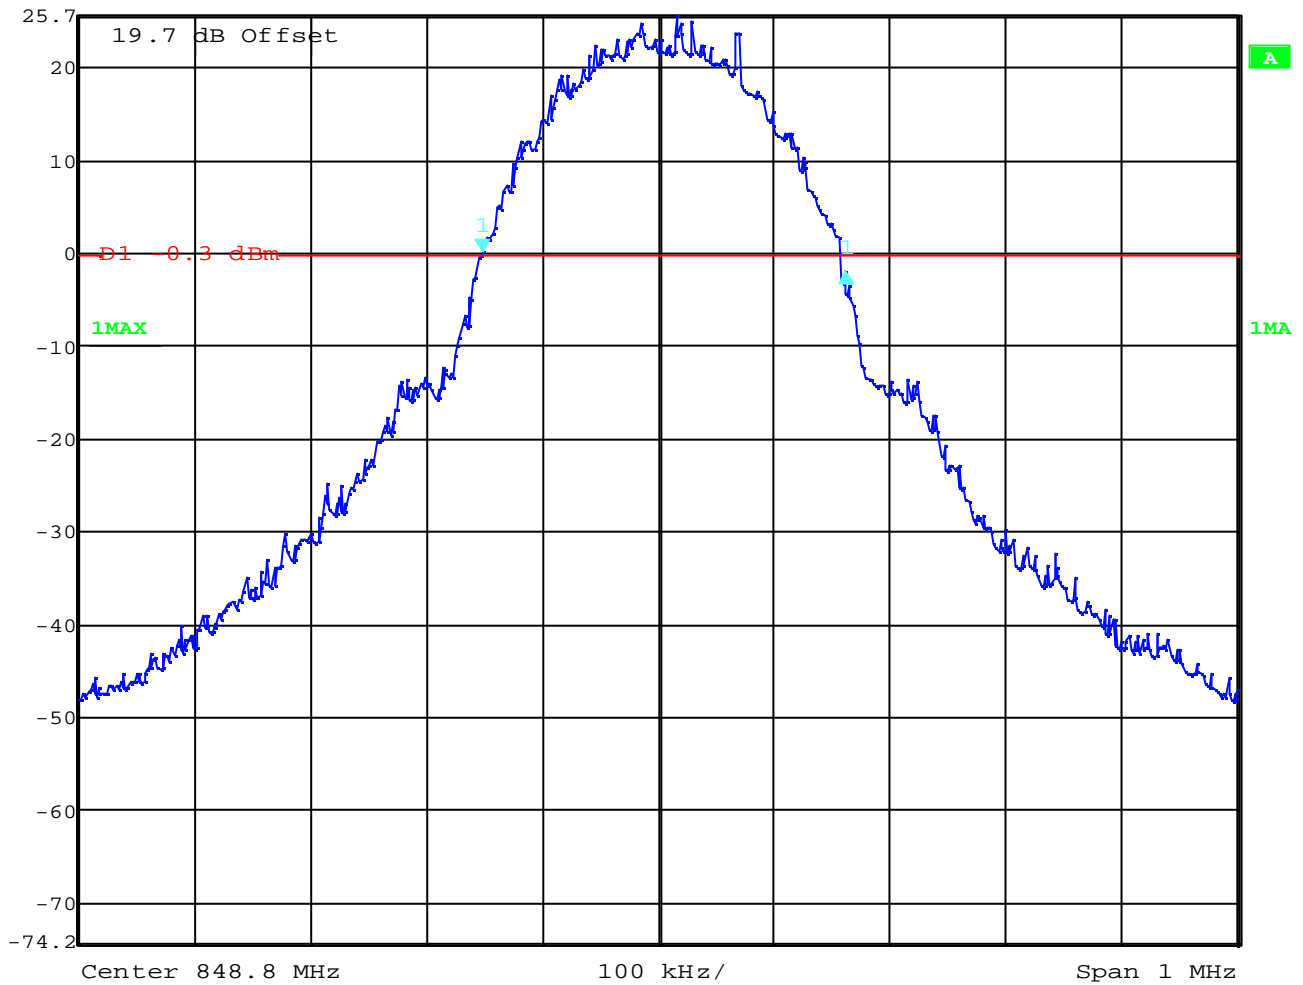


Date: 8.JAN.2004 09:46:40

**EMISSION LIMITATIONS FOR CELLULAR §22.917(F)**

**Mobile emissions in the base frequency range**

All peaks are below -80 dBm in the base frequency range.

**Idle Mode base station frequency range A**

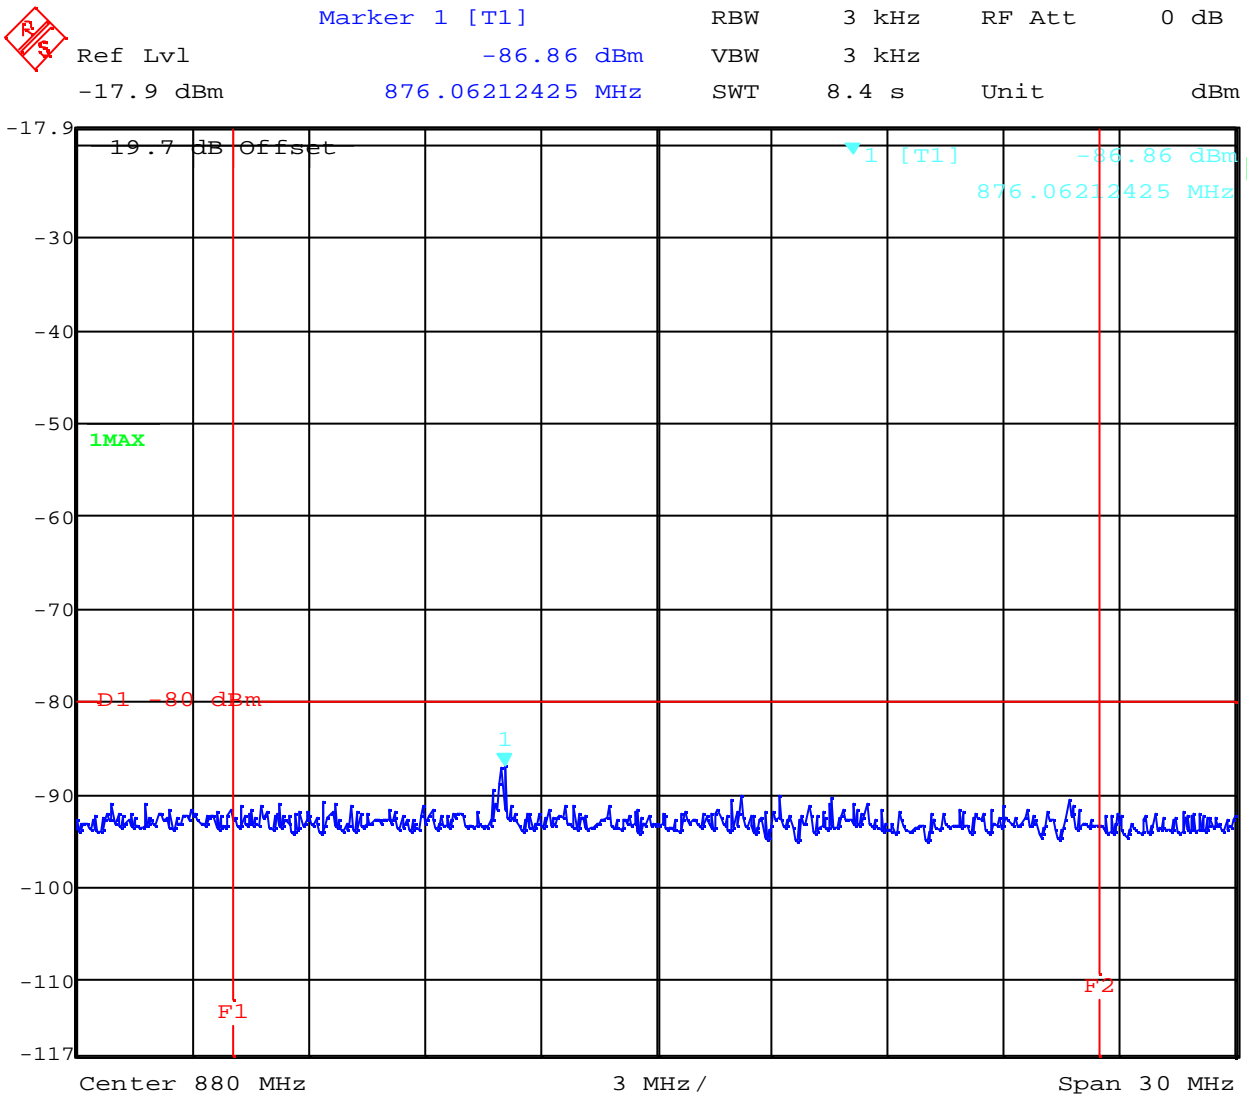

Date: 9.JAN.2004 07:07:42


**F1 = 869 MHz, F2 = 891.5 MHz**

**LIMITS**

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Mobile emissions in the base frequency range  
**Idle Mode base station frequency range B**

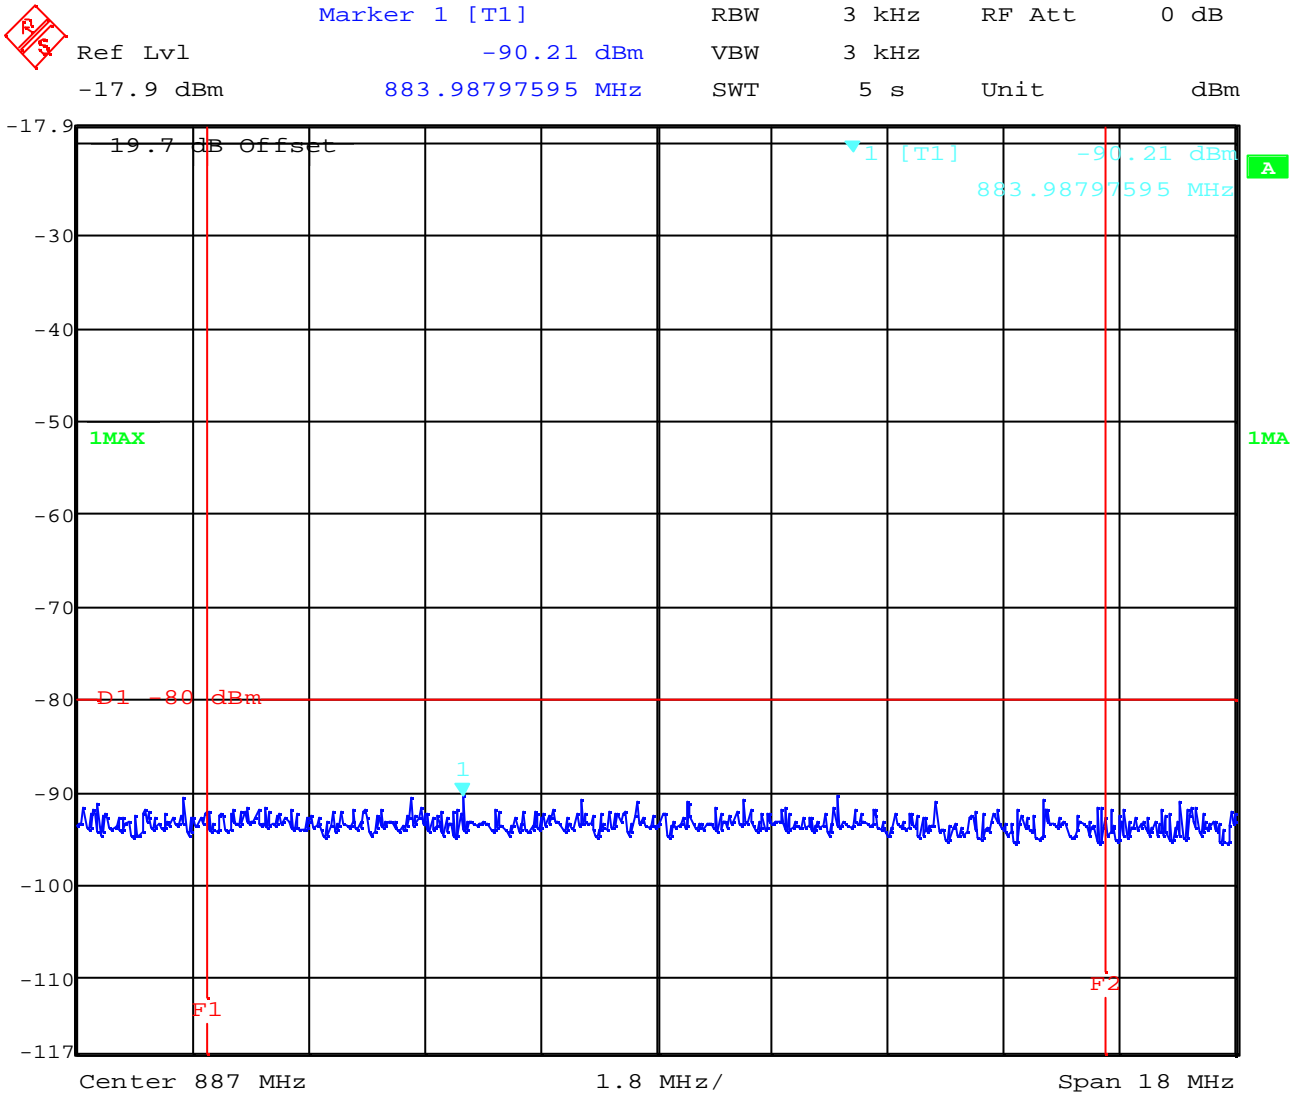

Date: 9.JAN.2004 07:06:28

**F1 = 880 MHz, F2 = 894 MHz**


**LIMITS**

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed **-80dBm** at the transmitter antenna connector

Mobile emissions in the base frequency range  
**TX Mode CH 128 base station frequency range A**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-17.9 dBm	-83.17 dBm	VBW	3 kHz		
		876.00200401 MHz	SWT	8.4 s	Unit	dBm

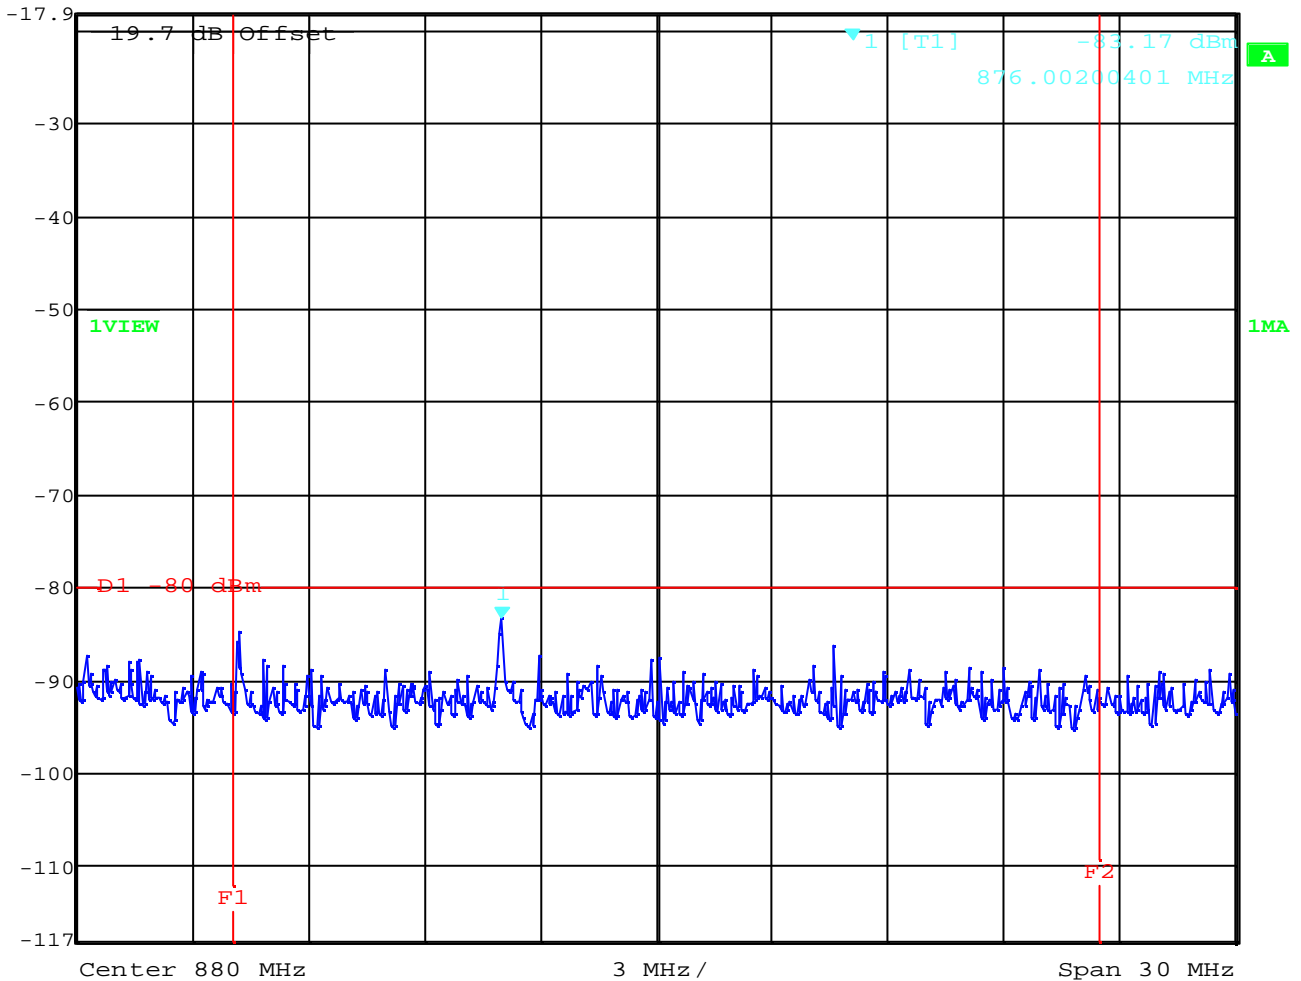

Date: 9.JAN.2004 06:55:52

**F1 = 869 MHz, F2 = 891.5 MHz**


**LIMITS**

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed **-80dBm** at the transmitter antenna connector

Mobile emissions in the base frequency range  
**TX Mode CH 189 base station frequency range A**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-17.9 dBm	-83.05 dBm	VBW	3 kHz		
		876.00200401 MHz	SWT	8.4 s	Unit	dBm

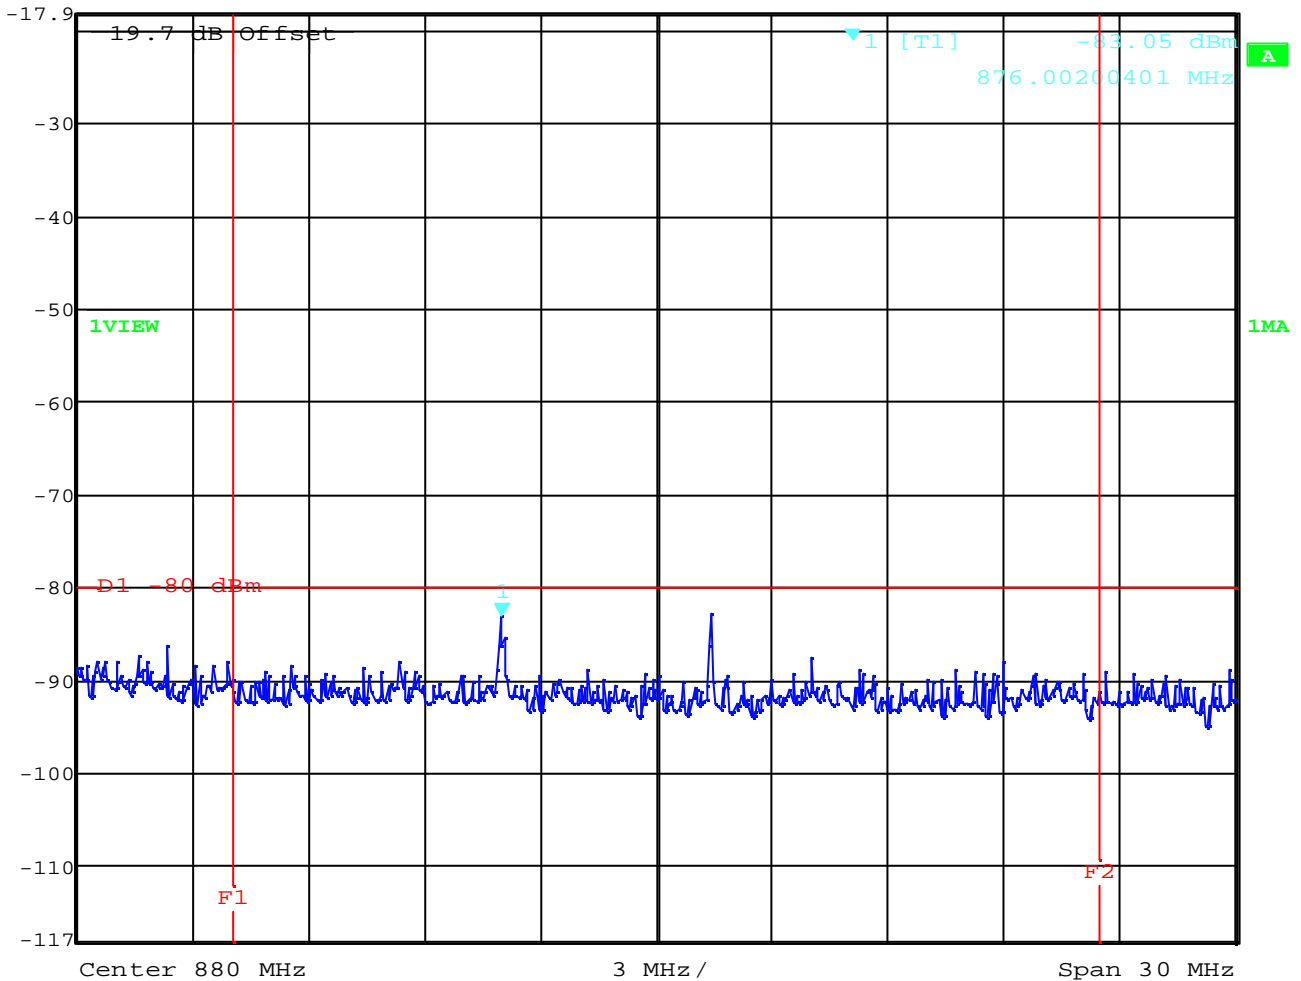

Date: 9.JAN.2004 07:01:51

**F1 = 869 MHz, F2 = 891.5 MHz**

**LIMITS**


**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed **-80dBm at the transmitter antenna connector**



Mobile emissions in the base frequency range  
**TX Mode CH 251 base station frequency range A**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-17.9 dBm	-83.19 dBm	VBW	3 kHz		
		876.00200401 MHz	SWT	8.4 s	Unit	dBm

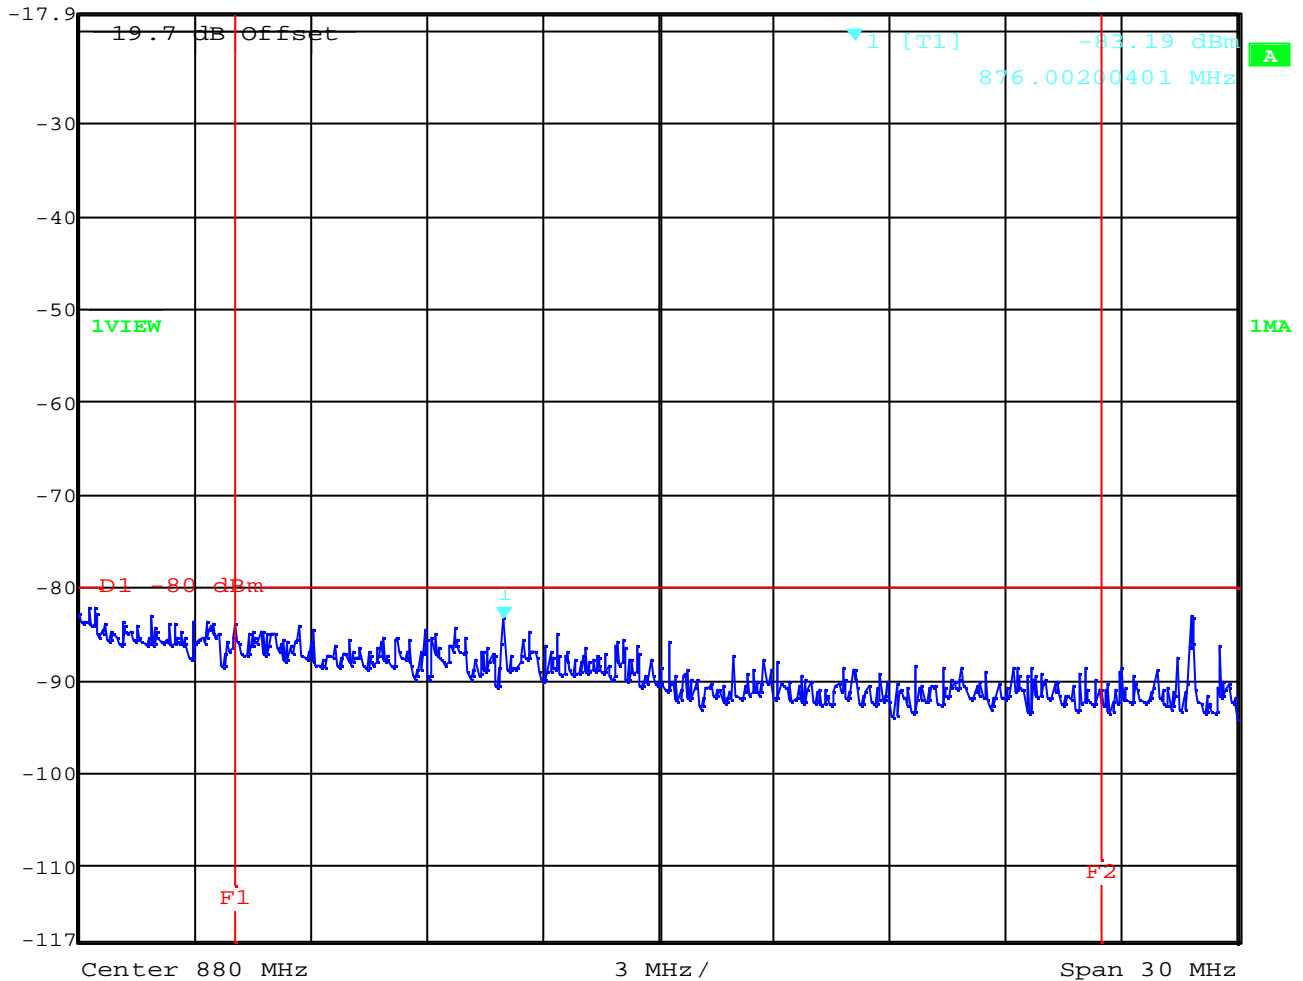

Date: 9.JAN.2004 07:04:16

**F1 = 869 MHz, F2 = 891.5 MHz**


**LIMITS**

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed **-80dBm** at the transmitter antenna connector

Mobile emissions in the base frequency range  
**TX Mode CH 128 base station frequency range B**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-17.9 dBm	-86.75 dBm	VBW	3 kHz		
		883.08617234 MHz	SWT	5 s	Unit	dBm

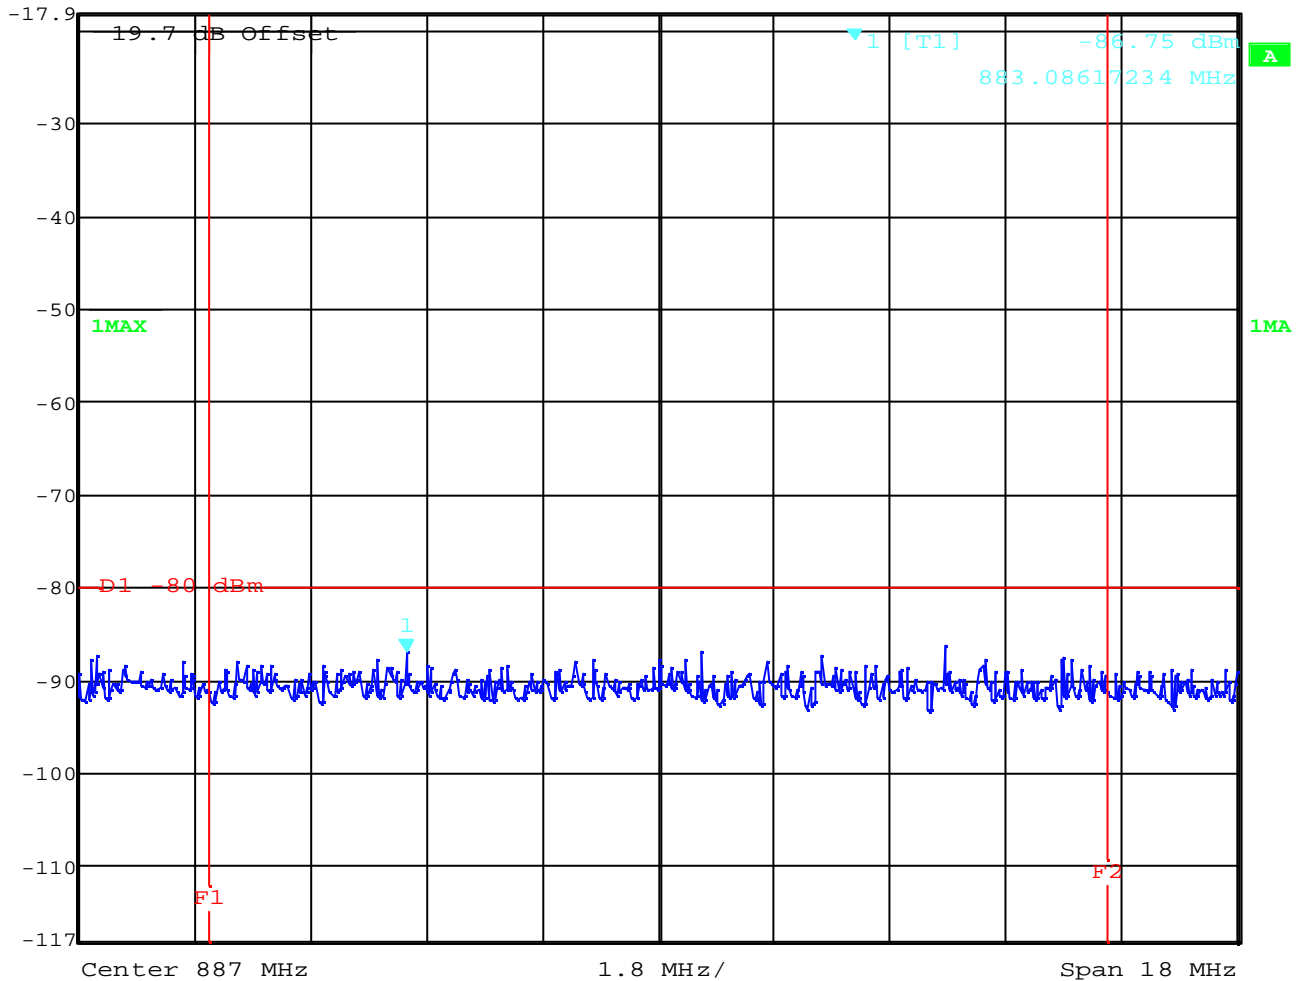

Date: 9.JAN.2004 06:58:02

**F1 = 880 MHz, F2 = 894 MHz**


**LIMITS**

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed **-80dBm** at the transmitter antenna connector

Mobile emissions in the base frequency range  
**TX Mode CH 189 base station frequency range B**

	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	Ref Lvl	-81.13 dBm	VBW	3 kHz	
	-17.9 dBm	881.39078156 MHz	SWT	5 s	Unit dBm

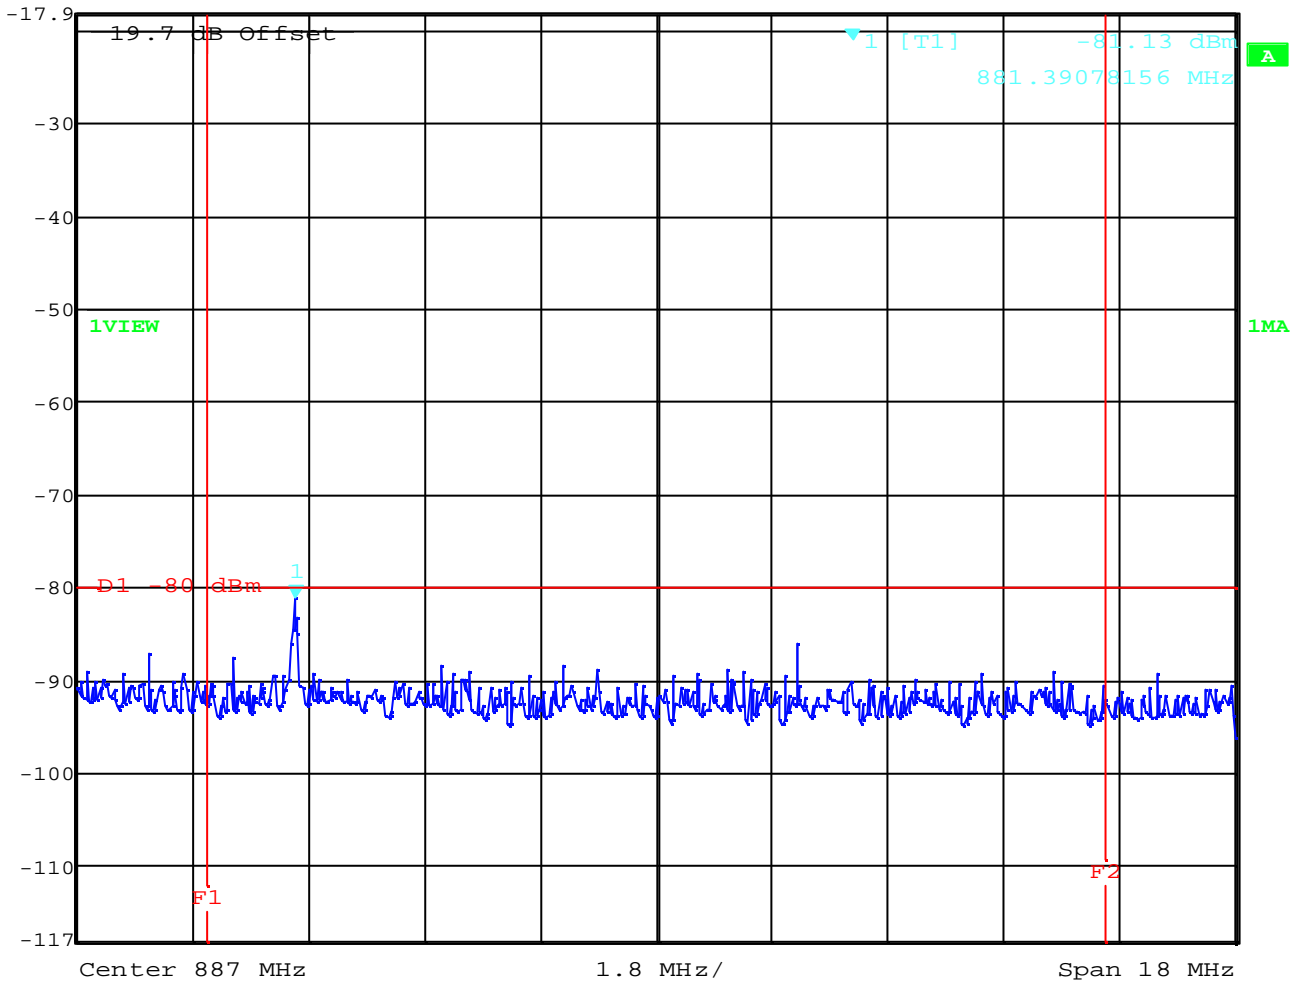

Date: 9.JAN.2004 07:00:28

**F1 = 880 MHz, F2 = 894 MHz**


**LIMITS**

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed **-80dBm** at the transmitter antenna connector

Mobile emissions in the base frequency range  
**TX Mode CH 251 base station frequency range B**

	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	Ref Lvl	-81.82 dBm	VBW	3 kHz	
	-17.9 dBm	893.83567134 MHz	SWT	5 s	Unit dBm

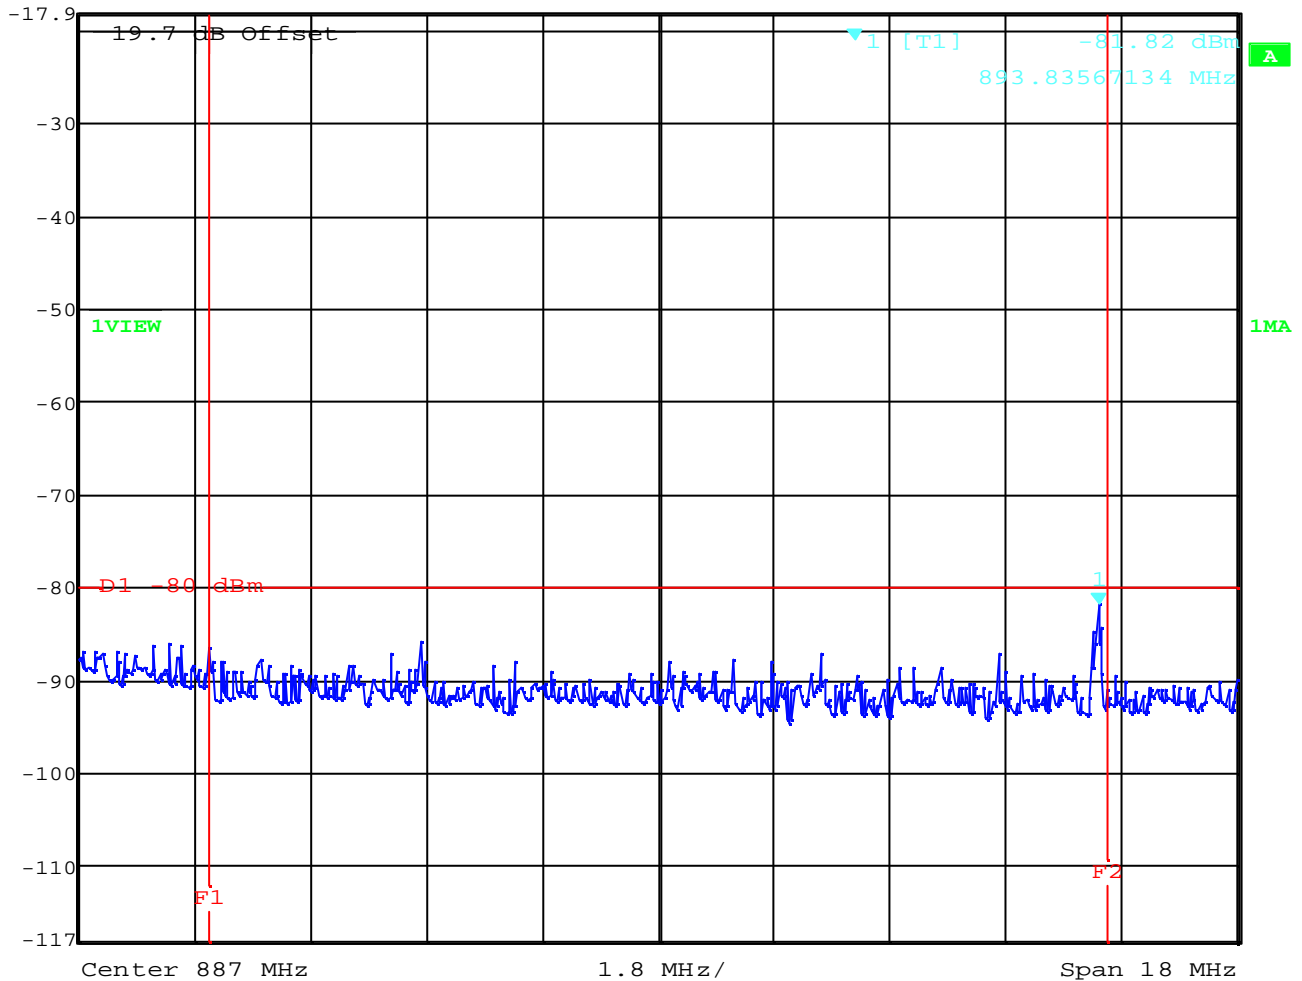

Date: 9.JAN.2004 07:05:29

**F1 = 880 MHz, F2 = 894 MHz**

**LIMITS**

**§22.917(f)**


The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed **-80dBm** at the transmitter antenna connector

## CONDUCTED EMISSIONS

§ 15.107/207


### CISPR 22

EUT: One touch 332a  
Manufacturer: Alcatel  
Operating Condition: traffic mode  
Test Site: Room 006  
Operator: Gillmann  
Test Specification: EN 55022  
Comment: 115V / 60Hz  
Start of Test: 07.01.04 / 08:24:25

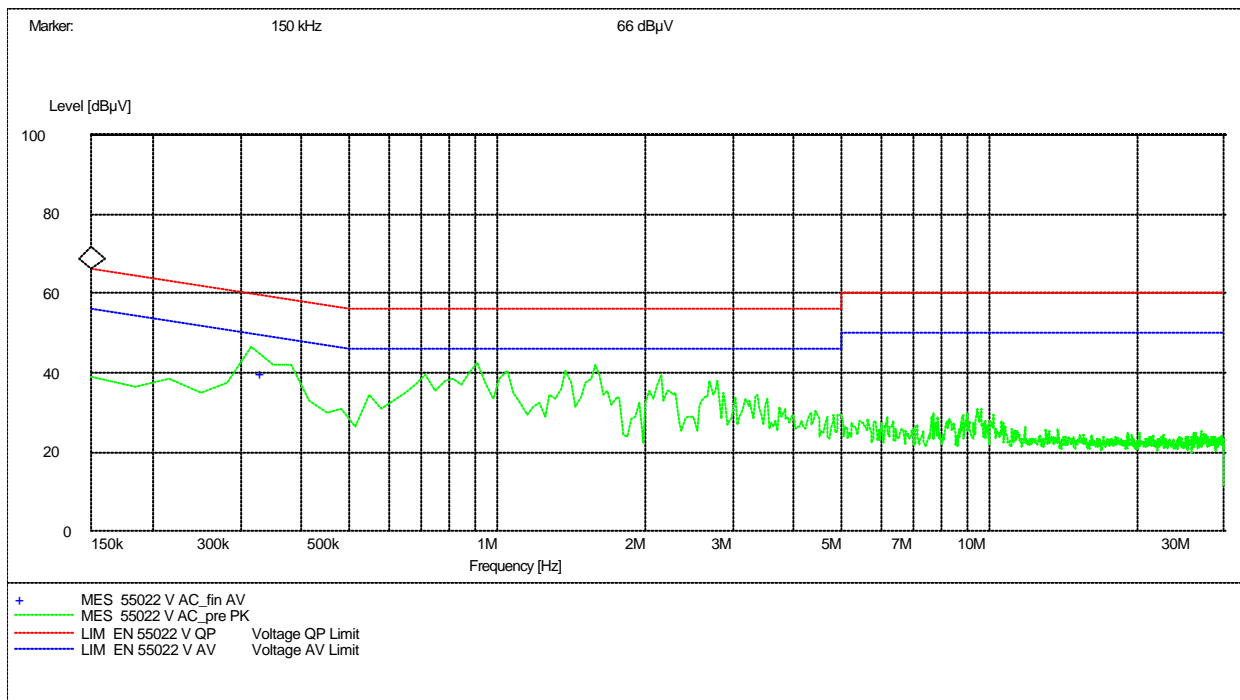

## CISPR 22

EUT: One touch 332a  
Manufacturer: Alcatel  
Operating Condition: Idle mode  
Test Site: Room 006  
Operator: Gillmann  
Test Specification: EN 55022  
Comment: 115 V / 60 Hz  
Start of Test: 07.01.04 / 08:32:17

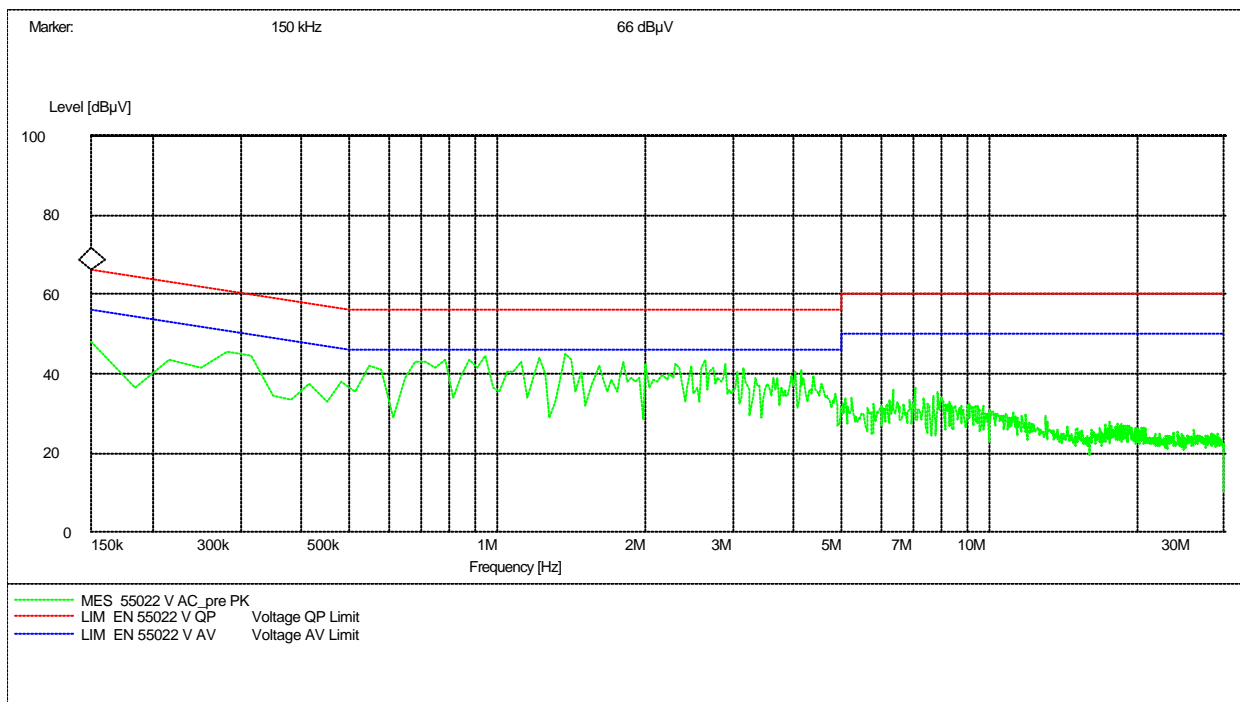

## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010

<b>35</b>	<b>EMI Test Receiver</b>	<b>Display</b>	<b>Rohde &amp; Schwarz</b>	<b>829 808/010</b>
-----------	--------------------------	----------------	----------------------------	--------------------





## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS


To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				

**Test site**

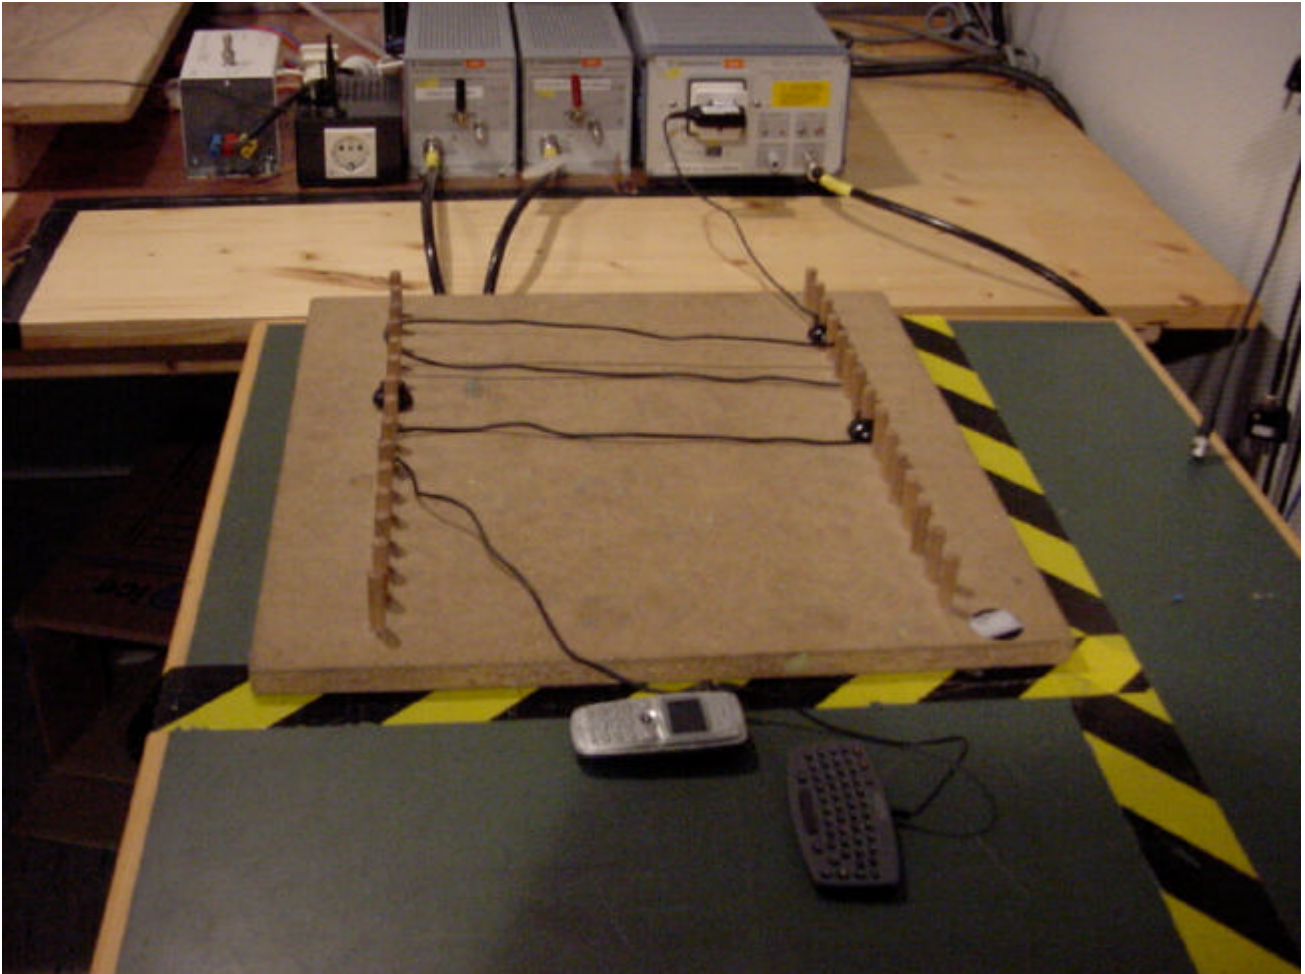

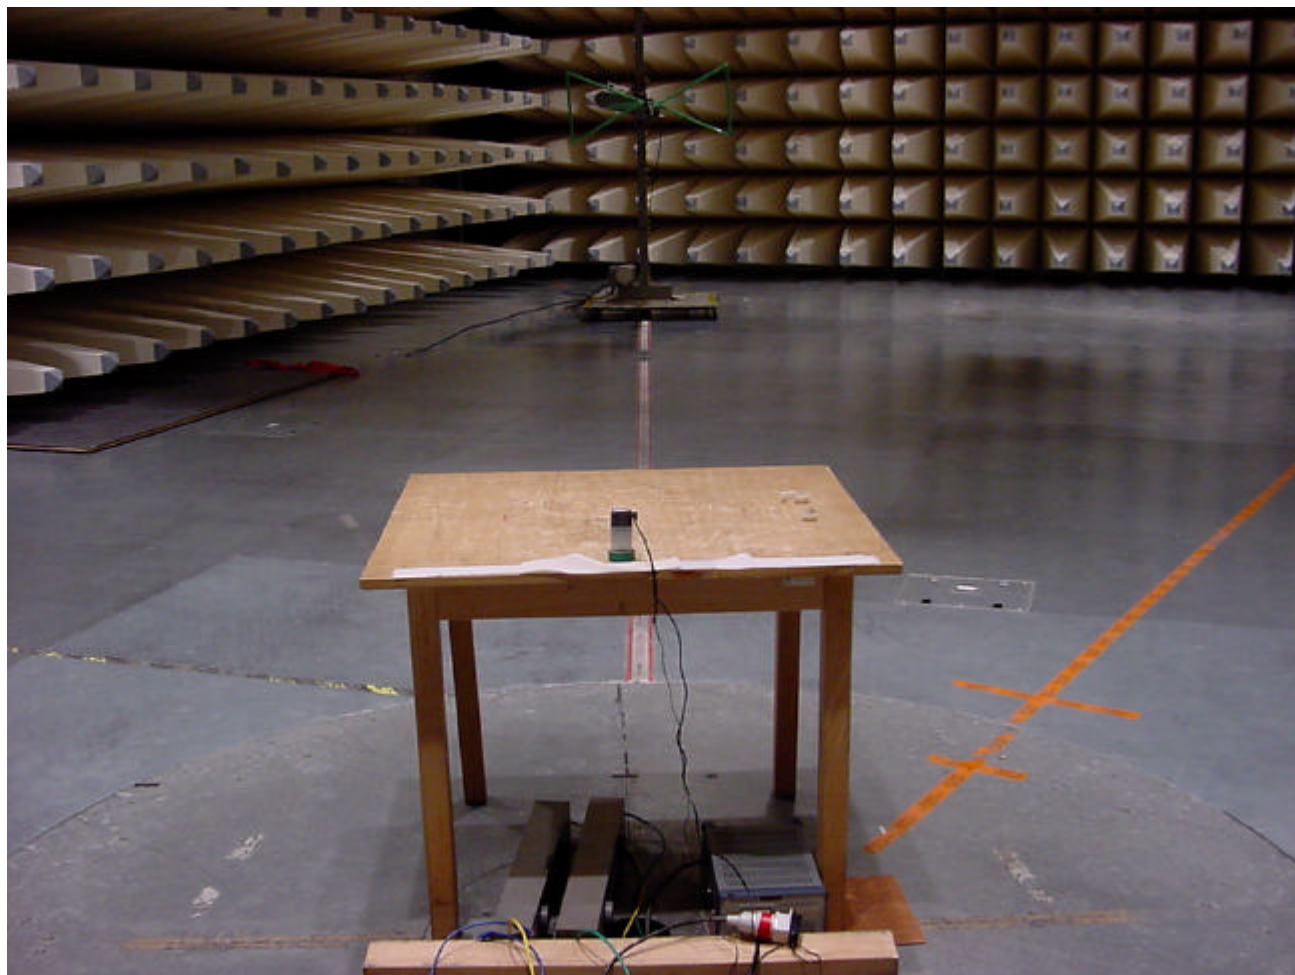

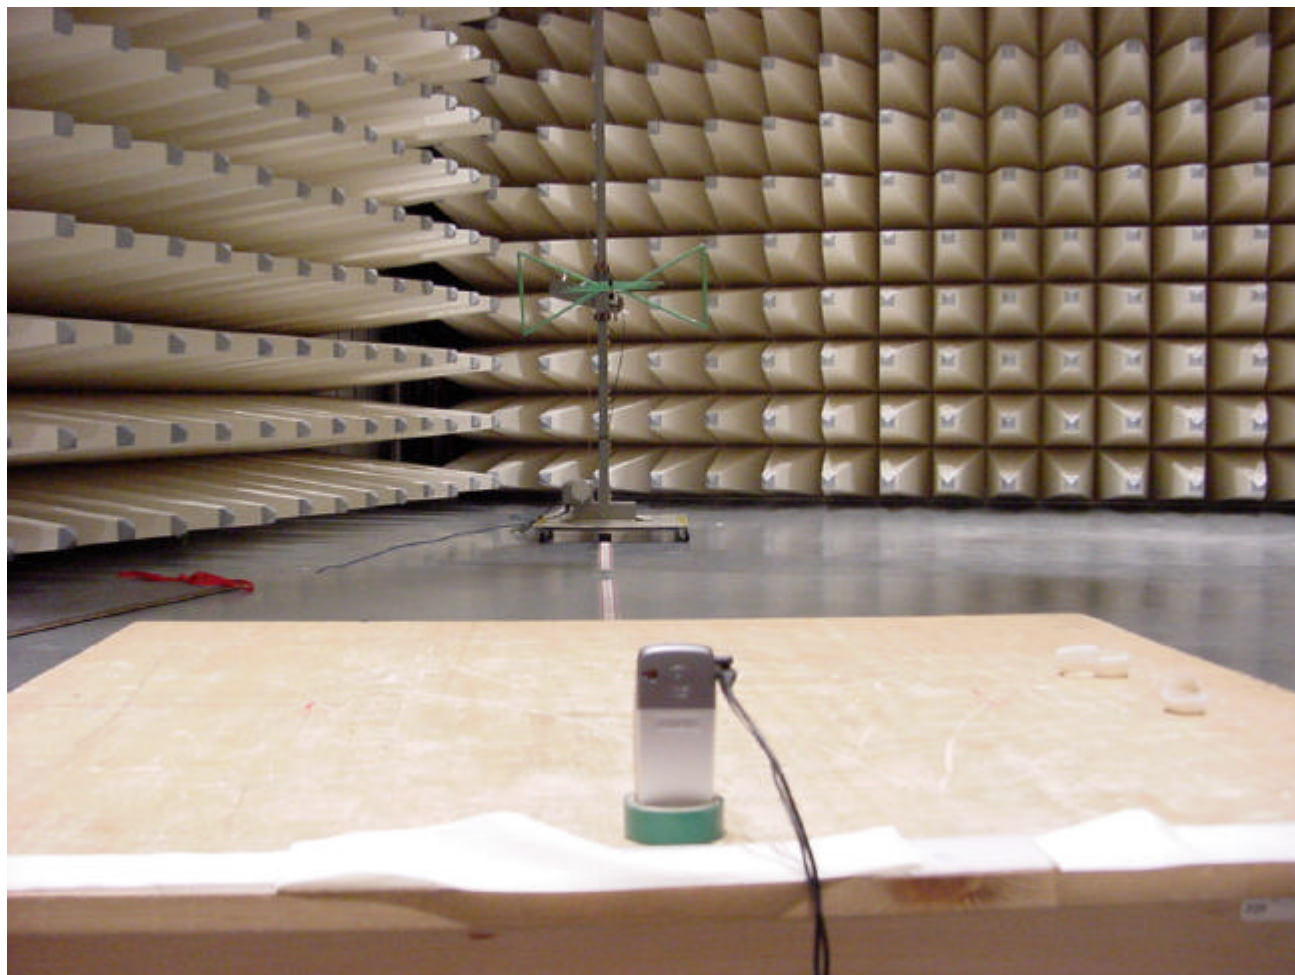

**Photographs of Equipment**

**Photo No.: 01**



**Photo No.: 02**



Photo No.: 03



**Photo No.: 04**

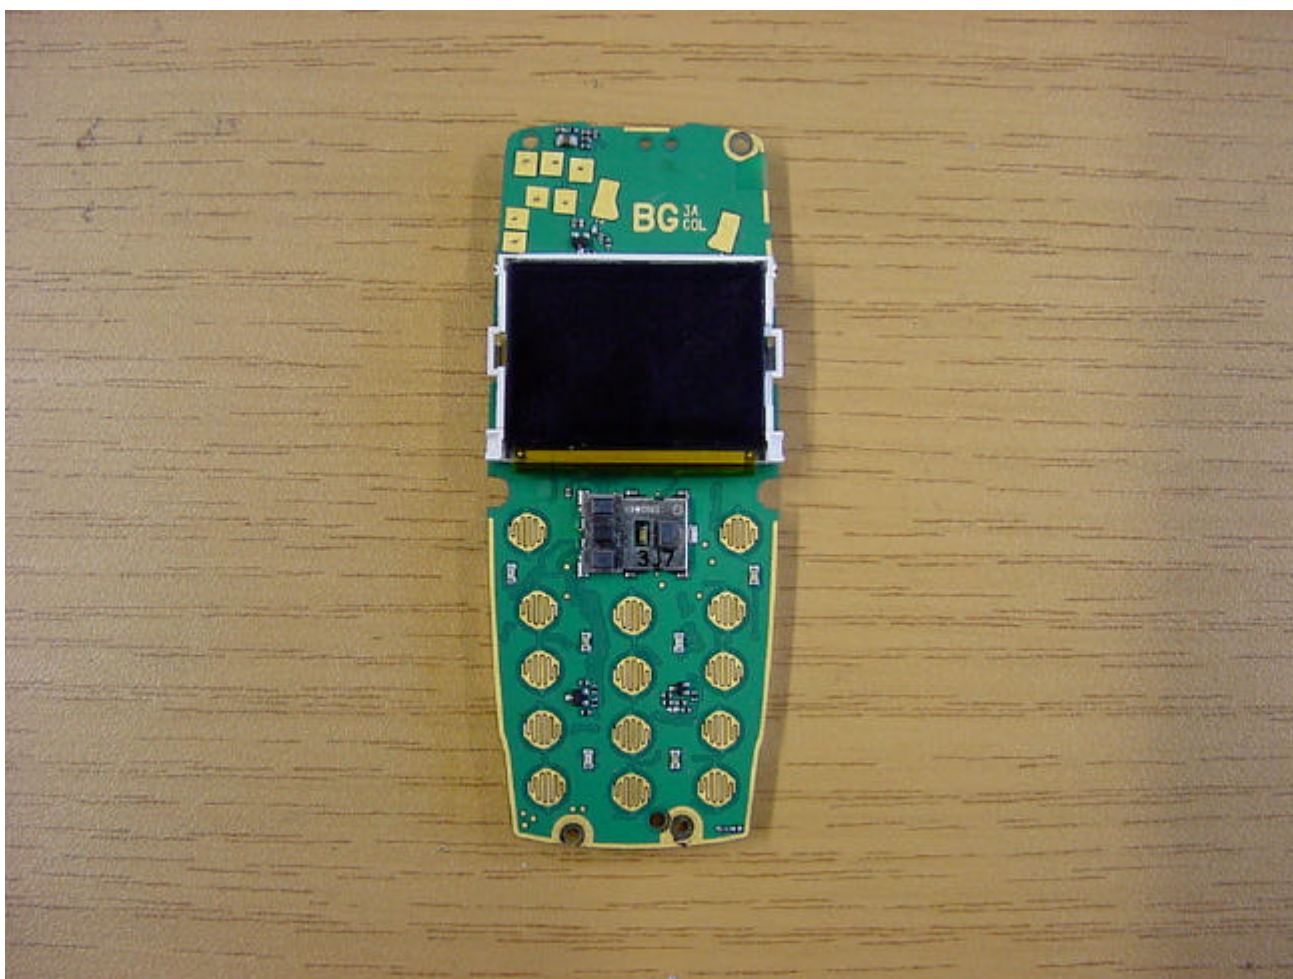




Photo No.: 05

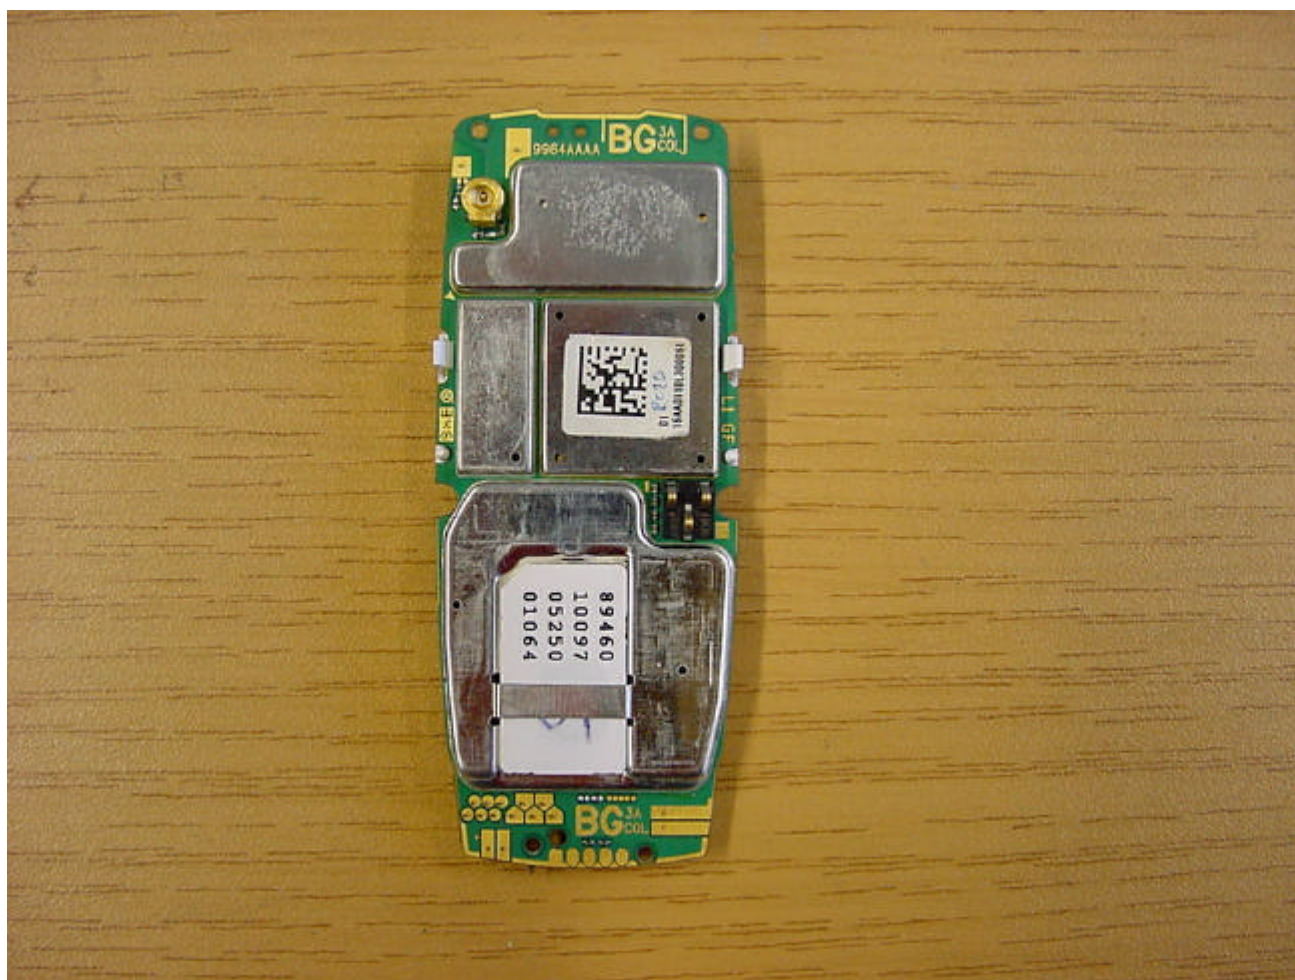


Photo No.: 05

