



# HAC RF TEST REPORT

No. 2011HAC00030-1

For

**TCT Mobile Limited**

**CDMA2000 dual band mobile phone**

**Venus**

**one touch 909B**

With

**Hardware Version: PIO**

**Software Version: vF23**

**FCCID: RAD210**

**Results Summary: M Category = M4** (for CDMA 850/1900 SO55)

**M Category = M3** (for CDMA 1900 SO3)

**Issued Date: 2011-09-14**



No. DGA-PL-114/01-02

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304793 Email:welcme@emcite.com. [www.emcite.com](http://www.emcite.com)

## TABLE OF CONTENT

<b>1 TEST LABORATORY .....</b>	<b>3</b>
1.1 TESTING LOCATION .....	3
1.2 TESTING ENVIRONMENT .....	3
1.3 PROJECT DATA.....	3
1.4 SIGNATURE.....	3
<b>2 CLIENT INFORMATION .....</b>	<b>4</b>
2.1 APPLICANT INFORMATION .....	4
2.2 MANUFACTURER INFORMATION .....	4
<b>3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....</b>	<b>4</b>
3.1 ABOUT EUT .....	4
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	4
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	4
<b>4 CONDUCTED OUTPUT POWER MEASUREMENT .....</b>	<b>5</b>
4.1 SUMMARY .....	5
4.2 CONDUCTED POWER .....	5
<b>5. REFERENCE DOCUMENTS .....</b>	<b>5</b>
5.1 REFERENCE DOCUMENTS FOR TESTING .....	5
<b>6 OPERATIONAL CONDITIONS DURING TEST .....</b>	<b>5</b>
6.1 HAC MEASUREMENT SET-UP .....	5
6.2 PROBE SPECIFICATION .....	6
6.3 TEST ARCH PHANTOM & PHONE POSITIONER .....	7
6.4 ROBOTIC SYSTEM SPECIFICATIONS .....	8
<b>7 EUT ARRANGEMENT .....</b>	<b>8</b>
7.1 WD RF EMISSION MEASUREMENTS REFERENCE AND PLANE .....	8
<b>8 SYSTEM VALIDATION .....</b>	<b>9</b>
8.1 VALIDATION PROCEDURE .....	9
8.2 VALIDATION RESULT .....	10
<b>9 PROBE MODULATION FACTOR.....</b>	<b>10</b>
9.1 MODULATION FACTOR TEST PROCEDURE.....	11
9.2 MODULATION FACTOR .....	12
<b>10 RF TEST PROCEDURES.....</b>	<b>13</b>
<b>11 HAC RF TEST DATA SUMMARY .....</b>	<b>14</b>
<b>12 ANSI C 63.19-2006 LIMITS .....</b>	<b>15</b>
<b>13 MEASUREMENT UNCERTAINTY .....</b>	<b>16</b>
<b>14 MAIN TEST INSTRUMENTS .....</b>	<b>18</b>
<b>15 CONCLUSION .....</b>	<b>18</b>
<b>ANNEX A TEST LAYOUT .....</b>	<b>19</b>
<b>ANNEX B TEST PLOTS .....</b>	<b>20</b>
<b>ANNEX C SYSTEM VALIDATION RESULT .....</b>	<b>52</b>
<b>ANNEX D PROBE CALIBRATION CERTIFICATE.....</b>	<b>56</b>

## 1 Test Laboratory

### 1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China  
Postal Code: 100191  
Telephone: +86-10-62304633  
Fax: +86-10-62304793

### 1.2 Testing Environment

Temperature: 18°C~25 °C,  
Relative humidity: 30%~ 70%  
Ground system resistance: < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.  
Reflection of surrounding objects is minimized and in compliance with requirement of standards.

### 1.3 Project Data

Project Leader: Qi Dianyuan  
Test Engineer: Lin Hao  
Testing Start Date: August 23, 2011  
Testing End Date: August 23, 2011


### 1.4 Signature



---

Lin Hao

(Prepared this test report)

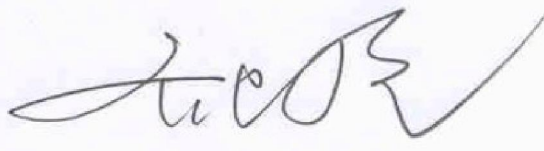

---

Qi Dianyuan

(Reviewed this test report)



---

Xiao Li

Deputy Director of the laboratory  
(Approved this test report)

## 2 Client Information

### 2.1 Applicant Information

Company Name: TCT Mobile Limited  
 Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech  
 Park, Pudong Area Shanghai, P.R. China. 201203  
 City: Shanghai  
 Postal Code: 201203  
 Country: P. R. China  
 Contact Person: Gong Zhizhou  
 Telephone: 0086-21-61460890  
 Fax: 0086-21-61460602

### 2.2 Manufacturer Information

Company Name: TCT Mobile Limited  
 Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech  
 Park, Pudong Area Shanghai, P.R. China. 201203  
 City: Shanghai  
 Postal Code: 201203  
 Country: P. R. China  
 Contact Person: Gong Zhizhou  
 Telephone: 0086-21-61460890  
 Fax: 0086-21-61460602

## 3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 3.1 About EUT

EUT Description: CDMA2000 dual band mobile phone  
 Model Name: Venus  
 Marketing Name: one touch 909B  
 Frequency Band: CDMA 835/1880

### 3.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	A100000862d7af	PIO	vF23

\*EUT ID: is used to identify the test sample in the lab internally.

### 3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAB31P0000C1	/	BYD

\*AE ID: is used to identify the test sample in the lab internally

## 4 CONDUCTED OUTPUT POWER MEASUREMENT

### 4.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured output power should be greater and within 5% than EMI measurement.

### 4.2 Conducted Power

CDMA 835MHz	Conducted Power (dBm)		
	Channel 777(848.31MHz)	Channel 384(836.52MHz)	Channel 1013(824.7MHz)
	24.5	24.88	24.75
CDMA 1900MHz	Conducted Power (dBm)		
	Channel 1175(1908.75MHz)	Channel 600(1880MHz)	Channel 25(1851.25MHz)
	24.24	24.20	24.22

## 5. Reference Documents

### 5.1 Reference Documents for testing

The following document listed in this section is referred for testing.


Reference	Title	Version
ANSI C63.19-2007	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids	2007 Edition
CTIA	CTIA_HAC_Test_Plan_Rev_2.0	2.0

## 6 OPERATIONAL CONDITIONS DURING TEST

### 6.1 HAC MEASUREMENT SET-UP

These measurements are performed using the DASY5 NEO automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Intel Core2 1.86 GHz computer with Windows XP system and HAC Measurement Software DASY5 NEO, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE

and transfers data to the PC plug-in card.

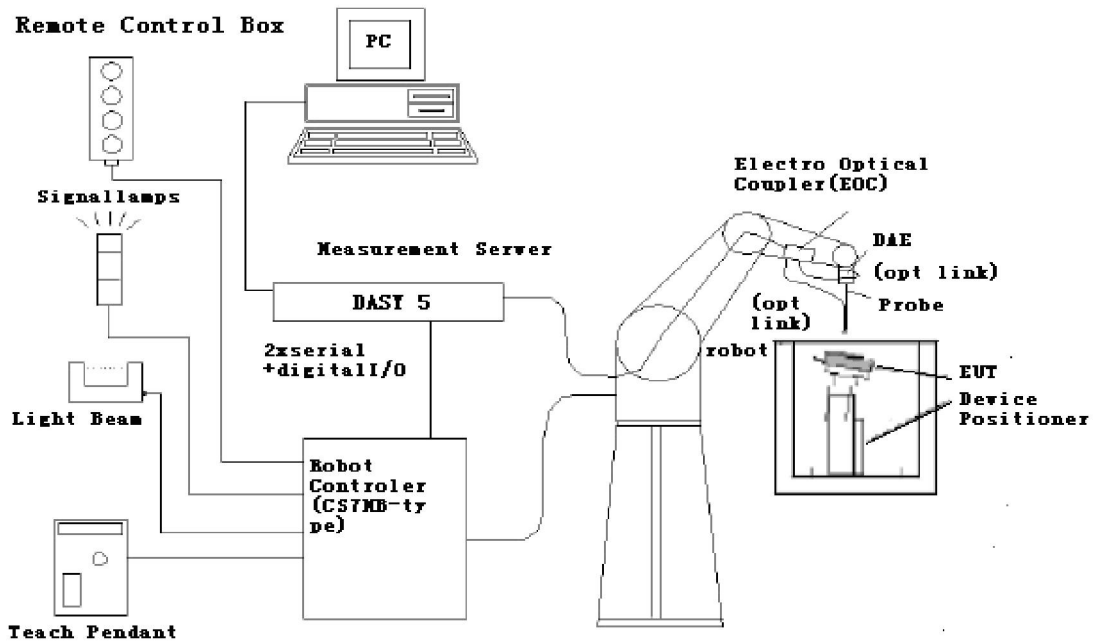

**Fig. 1 HAC Test Measurement Set-up**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

## 6.2 Probe Specification

### 6.2.1 E-Field Probe Description

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )
Frequency	40 MHz to > 6 GHz (can be extended to < 20 MHz) Linearity: $\pm 0.2$ dB (100 MHz to 3 GHz)
Directivity	$\pm 0.2$ dB in air (rotation around probe axis) $\pm 0.4$ dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm



**[ER3DV6]**

Application            General near-field measurements up to 6 GHz  
                               Field component measurements  
                               Fast automatic scanning in phantoms

### 6.2.2 H-Field Probe Description

Construction            Three concentric loop sensors with 3.8 mm loop diameters  
                               Resistively loaded detector diodes for linear response  
                               Built-in shielding against static charges  
                               PEEK enclosure material (resistant to organic solvents,  
                               e.g., glycoether)



[H3DV6]

Frequency              200 MHz to 3 GHz (absolute accuracy  $\pm 6.0\%$ ,  $k=2$ ); Output  
                               linearized

Directivity               $\pm 0.2$  dB (spherical isotropy error)

Dynamic Range        10 mA/m to 2 A/m at 1 GHz

E-Field Interference < 10% at 3 GHz (for plane wave)

Dimensions            Overall length: 330 mm (Tip: 40 mm)  
                               Tip diameter: 6 mm (Body: 12 mm)  
                               Distance from probe tip to dipole centers: 3 mm

Application            General magnetic near-field measurements up to 3 GHz (in  
                               air or liquids)  
                               Field component measurements  
                               Surface current measurements  
                               Low interaction with the measured field

### 6.3 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field  $< \pm 0.5$  dB.

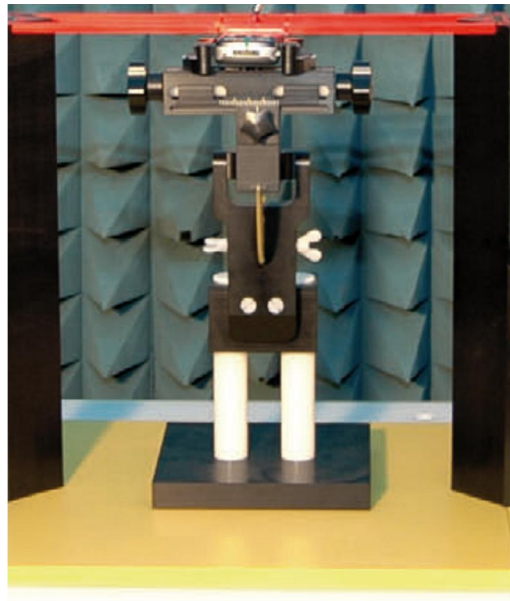


Fig. 2 HAC Phantom & Device Holder

## 6.4 Robotic System Specifications

### Specifications

**Positioner:** Stäubli Unimation Corp. Robot Model: RX160L

**Repeatability:**  $\pm 0.02$  mm

**No. of Axis:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** Intel Core2

**Clock Speed:** 1.86 GHz

**Operating System:** Windows XP

#### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY5 software

**Connecting Lines:** Optical downlink for data and status info.

Optical uplink for commands and clock

## 7 EUT ARRANGEMENT


### 7.1 WD RF Emission Measurements Reference and Plane

Figure 4 illustrates the references and reference plane that shall be used in the WD emissions measurement.

- The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the WD (speaker or T-coil).
- The grid is located by reference to a reference plane. This reference plane is the planar area that contains the highest point in the area of the WD that normally rests against the user's ear
- The measurement plane is located parallel to the reference plane and 10 mm from it, out from



the phone. The grid is located in the measurement plane.

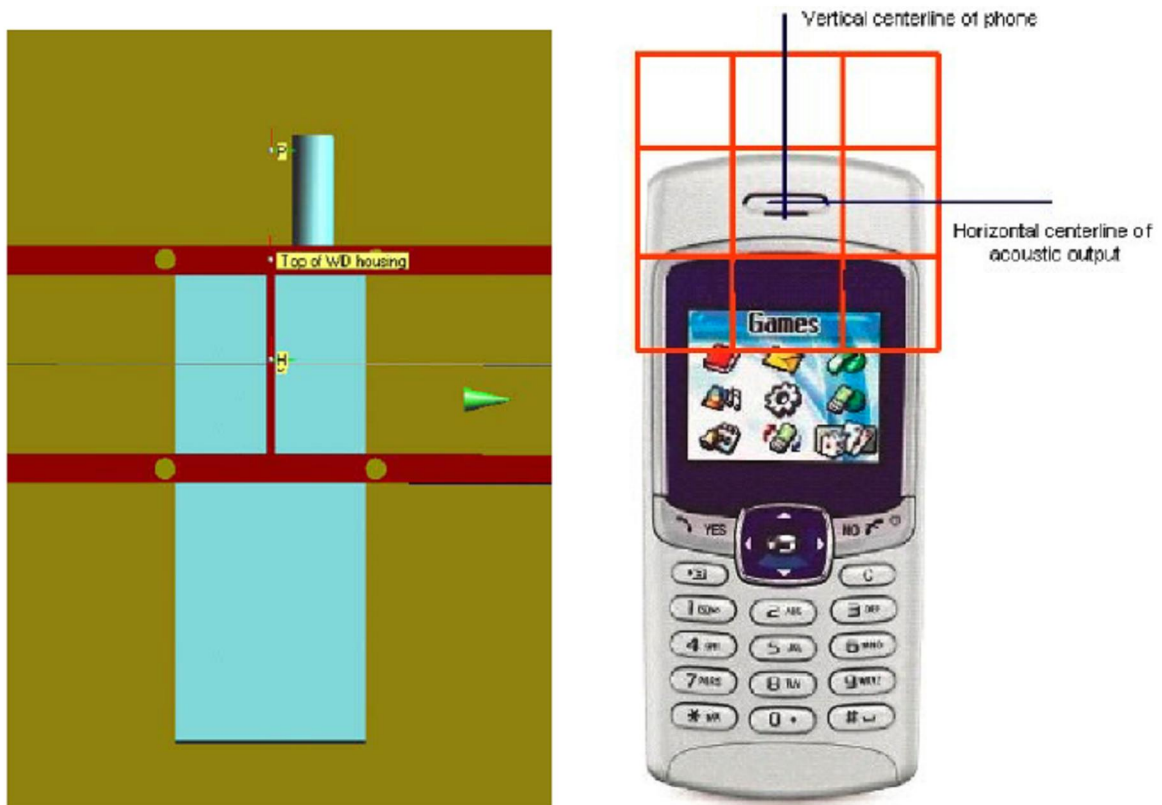

**Fig. 3 WD reference and plane for RF emission measurements**

## 8 SYSTEM VALIDATION

### 8.1 Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI C63.19 D.5 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field and H-field probes so that:

- The probes and their cables are parallel to the coaxial feed of the dipole antenna
- The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions
- The center point of the probe element(s) are 10 mm from the closest surface of the dipole elements.

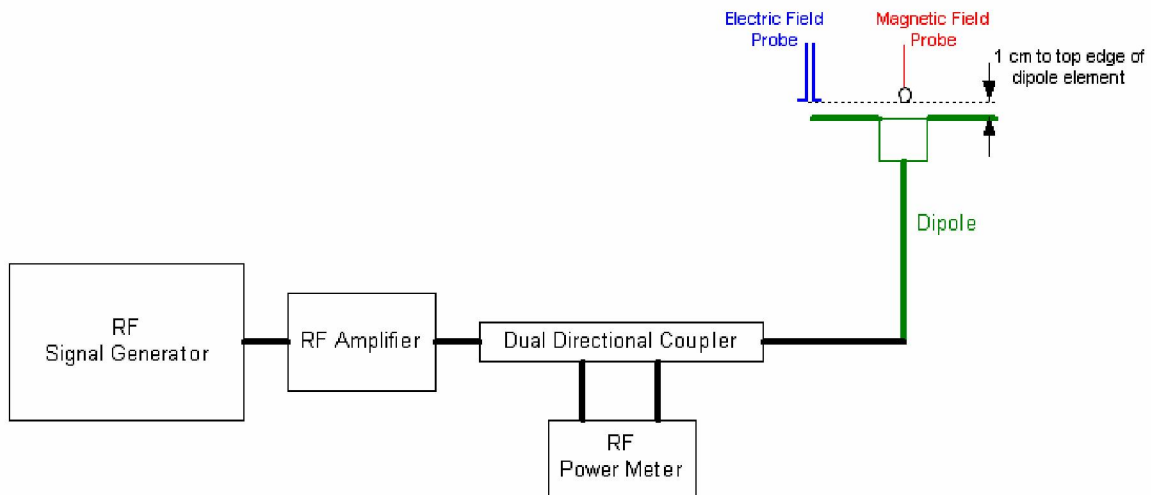


Fig. 4 Dipole Validation Setup

## 8.2 Validation Result

E-Field Scan							
Mode	Frequency (MHz)	Input Power (mW)	Power	Measured <sup>1</sup> Value(V/m)	Target <sup>2</sup> Value(V/m)	Deviation <sup>3</sup> (%)	Limit <sup>4</sup> (%)
CW	835	100		168.2	163.9	2.62	± 25
CW	1880	100		132.7	137.7	-3.63	± 25
H-Field Scan							
Mode	Frequency (MHz)	Input Power (mW)	Power	Measured Value(A/m)	Target Value(A/m)	Deviation (%)	Limit (%)
CW	835	100		0.447	0.458	-2.40	± 25
CW	1880	100		0.441	0.463	-4.75	± 25

Notes:

1. Please refer to the attachment for detailed measurement data and plot.
2. Target value is provided by SPEAD in the calibration certificate of specific dipoles.
3. Deviation (%) = 100 \* (Measured value minus Target value) divided by Target value.
4. ANSI C63.19 requires values within ± 25% are acceptable, of which 12% is deviation and 13% is measurement uncertainty. Values independently validated for the dipole actually used in the measurements should be used, when available.

## 9 Probe Modulation Factor

The Probe Modulation Factor (PMF) is defined as the ratio of the field readings for a CW and a modulated signal with the equivalent Field Envelope Peak as defined in ANSI C63.19 (Chapter C.3.1). Calibration shall be made of the modulation response of the probe and its instrumentation chain. This Calibration shall be performed with the field probe, attached to the instrumentation that is to be used with it during the measurement. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. The field level of the test signals shall be more than 10dB above the ambient level and

the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated field shall be applied to the readings taken of modulated fields of the specified type.

**Note:**

For the PMF of CDMA, we need to calculate it at CDMA SO55 and SO3 respectively according to CTIA request.

**9.1 Modulation Factor Test Procedure**

This may be done using the following procedure:

1. Fix the field probe in a set location relative to a field generating device, such as the reference dipole antenna, as illustrated in the following figure.
2. Illuminate the probe using the wireless device (EUT) connected to the reference dipole with a test signal at the intended measurement frequency, Ensure there is sufficient field coupling between the probe and the antenna so the resulting reading is greater than 10 dB above the probe system noise floor but within the systems operating range.

Note:

- The EUT shall be placed on a Service Option 3 call using Radio Configuration 1. The EUT audio shall be muted such that the RF gating is guaranteed to be 1/8th rate.

- The EUT shall be placed on a Service Option 2 or Service Option 55 call using Radio Configuration 1. The data rate shall be set to "Full".

- The test shall be run in Cell Band and PCS Band at low, mid, and high channels. Cell Band test channels shall be 1013, 384, and 777. PCS Band test channels shall be 25, 600, and 1175.

3. Record the amplitude applied to the antenna during transmission and the field strength measured by the E-field probe located near the tip of the dipole antenna
4. Replace the wireless device with an RF signal generator producing an unmodulated CW signal and set to the wireless device operating frequency.
5. Set the amplitude of the unmodulated signal to equal that recorded from the wireless device.
6. Record the reading of the probe measurement system of the unmodulated signal.
7. The ratio, in linear units, of the probe reading in Step 6) to the reading in Step 3) is the E-field modulation factor.  $PMF_E = E_{CW} / E_{mod}$  ( $PMF_H = H_{CW} / H_{mod}$ )
8. Repeat the previous steps using the H-field probe, except locate the probe at the center of the dipole.

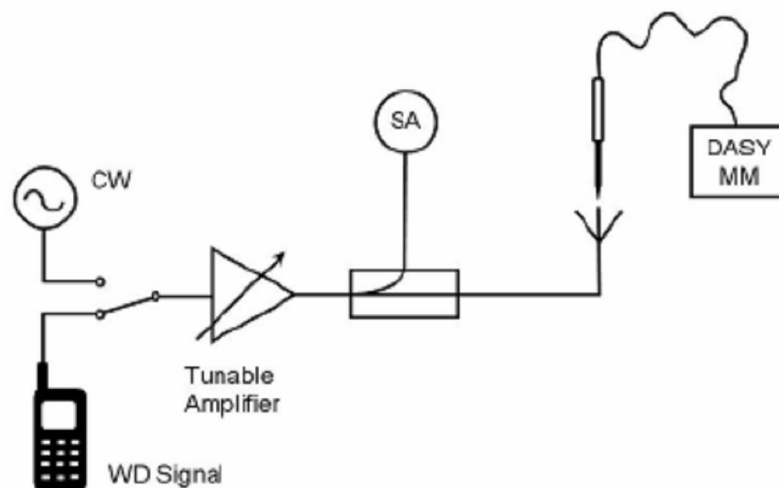


Fig. 6 Probe Modulation Factor Test Setup

## 9.2 Modulation Factor

### 9.2.1 E-Field

Mode	Frequency (MHz)	E-Field Measured Value (V/m)	Probe Modulation Factor
CW	848.31	266	<b>0.957</b>
CDMA(SO55)		278	
CW	836.52	247	<b>0.929</b>
CDMA(SO55)		266	
CW	824.7	231	<b>0.939</b>
CDMA(SO55)		246	
CW	848.31	34.51	<b>2.90</b>
CDMA(SO3)		11.91	
CW	836.52	34.29	<b>2.92</b>
CDMA(SO3)		11.76	
CW	824.7	34.58	<b>2.94</b>
CDMA(SO3)		11.74	
CW	1908.75	171	<b>0.929</b>
CDMA(SO55)		184	
CW	1880	176	<b>0.936</b>
CDMA(SO55)		188	
CW	1851.25	166	<b>0.938</b>
CDMA(SO55)		177	
CW	1908.75	43.46	<b>2.93</b>
CDMA(SO3)		14.82	
CW	1880	41.77	<b>2.87</b>
CDMA(SO3)		14.54	
CW	1851.25	41.64	<b>2.91</b>
CDMA(SO3)		14.33	

### 9.2.2 H-Field

Mode	Frequency (MHz)	H-Field Measured Value (A/m)	Probe Modulation Factor
CW	848.31	0.583	<b>0.901</b>
CDMA(SO55)		0.647	
CW	836.52	0.562	<b>0.893</b>
CDMA(SO55)		0.629	
CW	824.7	0.569	<b>0.902</b>
CDMA(SO55)		0.631	
CW	848.31	0.303	<b>2.89</b>
CDMA(SO3)		0.105	
CW	836.52	0.291	<b>2.82</b>
CDMA(SO3)		0.103	

CW	824.7	0.299	<b>2.62</b>
CDMA(SO3)		0.114	
CW	1908.75	0.473	<b>0.917</b>
CDMA(SO55)		0.516	
CW	1880	0.488	<b>0.937</b>
CDMA(SO55)		0.521	
CW	1851.25	0.481	<b>0.932</b>
CDMA(SO55)		0.516	
CW	1908.75	0.269	<b>2.83</b>
CDMA(SO3)		0.095	
CW	1880	0.243	<b>2.93</b>
CDMA(SO3)		0.083	
CW	1851.25	0.243	<b>2.76</b>
CDMA(SO3)		0.088	

## 10 RF TEST PROCEDURES

**The evaluation was performed with the following procedure:**

- 1) Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
- 2) Position the WD in its intended test position. The gauge block can simplify this positioning. Note that a separate E-field and H-field gauge block will be needed if the center of the probe sensor elements are at different distances from the tip of the probe.
- 3) Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters (e.g., test mode), as intended for the test.
- 4) The center sub-grid shall centered on the center of the T-Coil mode axial measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane. If the field alignment method is used, align the probe for maximum field reception.
- 5) Record the reading.
- 6) Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- 7) Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum field strength readings. Thus the six areas to be used to determine the WD's highest emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E-field and H-field measurements for the WD output being measured. Stated another way, the center sub-grid and three others must be common to both the E-field and H-field measurements.
- 8) Identify the maximum field reading within the non-excluded sub-grids identified in Step 7)
- 9) Convert the maximum field strength reading identified in Step 8) to V/m or A/m, as appropriate. For probes which require a probe modulation factor, this conversion shall be done using the appropriate probe modulation factor and the calibration.
- 10) Repeat Step 1) through Step 10) for both the E-field and H-field measurements.

11) Compare this reading to the categories in ANSI C63.19 Clause 7 and record the resulting category. The lowest category number listed in 7.2, Table 7.4, or Table 7.5 obtained in Step 10) for either E- or H-field determines the M category for the audio coupling mode assessment. Record the WD category rating.

## 11 HAC RF TEST DATA SUMMARY

### 11.1 Measurement Results (E-Field)

CDMA Mode: SO55

Frequency		AWF	Measured Value (V/m)	Power Drift (dB)	Category
MHz	Channel				
<b>CDMA 835</b>					
848.31	777	0	75	-0.156	<b>M4</b> (see Fig B.1)
836.52	384	0	77.2	-0.066	<b>M4</b> (see Fig B.2)
824.7	1013	0	63.4	0.00248	<b>M4</b> (see Fig B.3)
<b>CDMA 1880</b>					
1908.75	1175	0	42.9	-0.041	<b>M4</b> (see Fig B.4)
1880	600	0	44	-0.186	<b>M4</b> (see Fig B.5)
1851.25	25	0	47.4	-0.061	<b>M4</b> (see Fig B.6)

CDMA Mode: SO3

Frequency		AWF	Measured Value (V/m)	Power Drift (dB)	Category
MHz	Channel				
<b>CDMA 835</b>					
848.31	777	0	60	0.042	<b>M4</b> (see Fig B.7)
836.52	384	0	66.8	0.167	<b>M4</b> (see Fig B.8)
824.7	1013	0	62.1	0.066	<b>M4</b> (see Fig B.9)
<b>CDMA 1880</b>					
1908.75	1175	0	51.3	-0.165	<b>M4</b> (see Fig B.10)
1880	600	0	54.1	0.056	<b>M4</b> (see Fig B.11)
1851.25	25	0	54.9	-0.096	<b>M4</b> (see Fig B.12)

### 11.2 Measurement Results (H-Field)

CDMA Mode: SO55

Frequency		AWF	Measured Value (A/m)	Power Drift (dB)	Category
MHz	Channel				
<b>CDMA 835</b>					
848.31	777	0	0.099	0.045	<b>M4</b> (see Fig B.13)
836.52	384	0	0.100	-0.00136	<b>M4</b> (see Fig B.14)
824.7	1013	0	0.086	-0.012	<b>M4</b> (see Fig B.15)
<b>CDMA 1880</b>					
1908.75	1175	0	0.102	-0.080	<b>M4</b> (see Fig B.16)
1880	600	0	0.101	-0.109	<b>M4</b> (see Fig B.17)

1851.25	25	0	0.106	-0.00614	M4(see Fig B.18)
---------	----	---	-------	----------	------------------

**CDMA Mode: SO3**

Frequency		AWF	Measured Value (A/m)	Power Drift (dB)	Category
MHz	Channel				
<b>CDMA 835</b>					
848.31	777	0	0.110	-0.090	M4(see Fig B.19)
836.52	384	0	0.112	0.185	M4(see Fig B.20)
824.7	1013	0	0.088	-0.053	M4(see Fig B.21)
<b>CDMA 1880</b>					
1908.75	1175	0	0.124	-0.083	M4(see Fig B.22)
1880	600	0	0.193	0.013	M3(see Fig B.23)
1851.25	25	0	0.132	-0.141	M4(see Fig B.24)

**11.3 Total M-rating**

**CDMA Mode: SO55**

Mode	Maximum value of peak Total E-Field (V/m)	Maximum value of peak Total H-Field (A/m)	E-Field M Rating	H-Field M Rating	Total M Rating
CDMA 835	77.2	0.100	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.25)
CDMA 1880	47.4	0.106	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.26)

**CDMA Mode: SO3**

Mode	Maximum value of peak Total E-Field (V/m)	Maximum value of peak Total H-Field (A/m)	E-Field M Rating	H-Field M Rating	Total M Rating
CDMA 835	66.8	0.112	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.27)
CDMA 1880	54.9	0.193	M4 (AWF 0 dB)	M3 (AWF 0 dB)	M3(see Fig B.28)

**12 ANSI C 63.19-2006 LIMITS**

**Table 1: Telephone near-field categories in linear units**

Category		Telephone RF parameters < 960 MHz			
Near field	AWF	E-field emissions		H-field emissions	
Category M1/T1	0	631.0 to 1122.0	V/m	1.91 to 3.39	A/m
	-5	473.2 to 841.4	V/m	1.43 to 2.54	A/m
Category M2/T2	0	354.8 to 631.0	V/m	1.07 to 1.91	A/m
	-5	266.1 to 473.2	V/m	0.80 to 1.43	A/m
Category M3/T3	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m

	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M4/T4	0	< 199.5	V/m	< 0.60	A/m
	-5	< 149.6	V/m	< 0.45	A/m
<b>Category</b>		<b>Telephone RF parameters &gt; 960 MHz</b>			
<b>Near field</b>	<b>AWF</b>	<b>E-field emissions</b>		<b>H-field emissions</b>	
Category M1/T1	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M2/T2	0	112.2 to 199.5	V/m	0.34 to 0.60	A/m
	-5	84.1 to 149.6	V/m	0.25 to 0.45	A/m
Category M3/T3	0	63.1 to 112.2	V/m	0.19 to 0.34	A/m
	-5	47.3 to 84.1	V/m	0.14 to 0.25	A/m
Category M4/T4	0	< 63.1	V/m	< 0.19	A/m
	-5	< 47.3	V/m	< 0.14	A/m

### 13 MEASUREMENT UNCERTAINTY

No.	Error source	Type	Uncertainty Value (%)	Prob. Dist.	k	$c_i$ E	$c_i$ H	Standard Uncertainty (%) $u_i$	Standard Uncertainty (%) $u_i$	Degree of freedom $V_{eff}$ or $\nu_i$
								E	H	
1	System repeatability	A	0.24	N	1	1	1	0.24	0.24	9
<b>Measurement System</b>										
2	- Probe Calibration	B	3	N	1	1	1	5.1	5.1	$\infty$
3	- Axial Isotropy	B	3.5	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
4	- Sensor Displacement	B	16.5	R	$\sqrt{3}$	1	0.145	9.5	1.4	$\infty$
5	- Boundary Effects	B	2.4	R	$\sqrt{3}$	1	1	1.4	1.4	$\infty$
6	- Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
7	- Scaling to Peak Envelope Power	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	$\infty$
8	- System Detection Limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
9	- Readout Electronics	B	0.3	N	1	1	1	0.3	0.3	$\infty$
10	- Response Time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$



11	- Integration Time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
12	- RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
13	- RF Reflections	B	12.0	R	$\sqrt{3}$	1	1	6.9	6.9	$\infty$
14	- Probe Positioner	A	1.2	R	$\sqrt{3}$	1	0.67	0.7	0.5	$\infty$
15	- Probe Positioning	A	4.7	R	$\sqrt{3}$	1	0.67	2.7	1.8	$\infty$
16	- Extra. And Interpolation	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Test Sample Related</b>										
17	- Device Positioning Vertical	B	4.7	R	$\sqrt{3}$	1	0.67	2.7	1.8	$\infty$
18	- Device Positioning Lateral	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
19	- Device Holder and Phantom	B	2.4	R	$\sqrt{3}$	1	1	1.4	1.4	$\infty$
20	- Power Drift	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and Setup related</b>										
21	- Phantom Thickness	B	2.4	R	$\sqrt{3}$	1	0.67	1.4	0.9	$\infty$
<b>PMF</b>										
22	- monitoring amplitude ratio	B	2.8	R	$\sqrt{3}$	1	1	1.6	1.6	$\infty$
23	- setup repeatability	A	2.7	N	1	1	1	2.7	2.7	9
24	- sensor amplitude	B	11.6	R	$\sqrt{3}$	1	0.569	6.7	3.8	$\infty$
Combined standard uncertainty (%)		$u_c = \sqrt{\sum_{i=1}^{24} c_i^2 u_i^2}$						16.4	11.5	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N		k=2		32.8	23.0	

## 14 MAIN TEST INSTRUMENTS

Table 2: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	E-Field Probe	ER3DV6	2428	October 20, 2010	One year
02	H-Field Probe	H3DV6	6260	October 20, 2010	One year
03	HAC Dipole	CD835V3	1023	October 21, 2009	Two years
04	HAC Dipole	CD1880V3	1018	October 21, 2009	Two years
05	BTS	8960	MY48365192	November 18, 2010	One year
06	DAE	SPEAG DAE4	777	July 8, 2011	One year

## 15 CONCLUSION

The HAC measurement indicates that the EUT complies with the HAC limits of the ANSI C63.19-2007. The total M-rating is **M4** for CDMA 835 and CDMA 1900 SO55 band, **M3** for CDMA 1900 SO3 band .

\*\*\*END OF REPORT BODY\*\*\*

## ANNEX A TEST LAYOUT



Picture A1: HAC RF System Layout

## ANNEX B TEST PLOTS

### HAC RF E-Field CDMA 835 High – SO55

Date/Time: 8/23/2011 1:58:54 PM

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

### E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 75 V/m

Probe Modulation Factor = 0.957


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 100.6 V/m; Power Drift = -0.156 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 70.2 M4	Grid 2 74.3 M4	Grid 3 70.4 M4
Grid 4 71.1 M4	Grid 5 75 M4	Grid 6 71.1 M4
Grid 7 68.6 M4	Grid 8 72.1 M4	Grid 9 68.5 M4

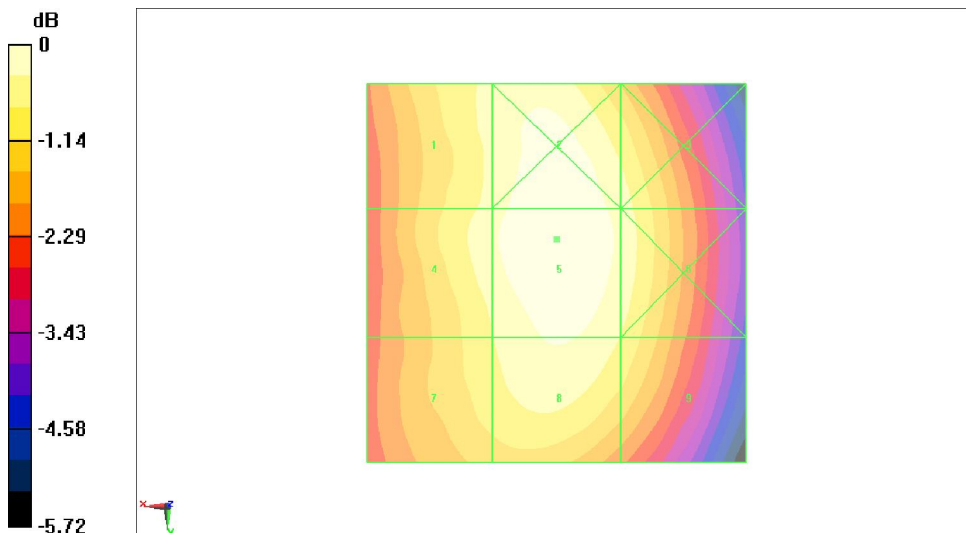

0 dB = 75V/m

Fig B.1 HAC RF E-Field CDMA 835 High

**HAC RF E-Field CDMA 835 Middle – SO55**

**Date/Time: 8/23/2011 1:53:10 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 77.2 V/m

Probe Modulation Factor = 0.929


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 105.8 V/m; Power Drift = -0.066 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 72.5 M4	Grid 2 76.5 M4	Grid 3 71.9 M4
Grid 4 72 M4	Grid 5 77.2 M4	Grid 6 72.7 M4
Grid 7 72 M4	Grid 8 74.3 M4	Grid 9 70.1 M4

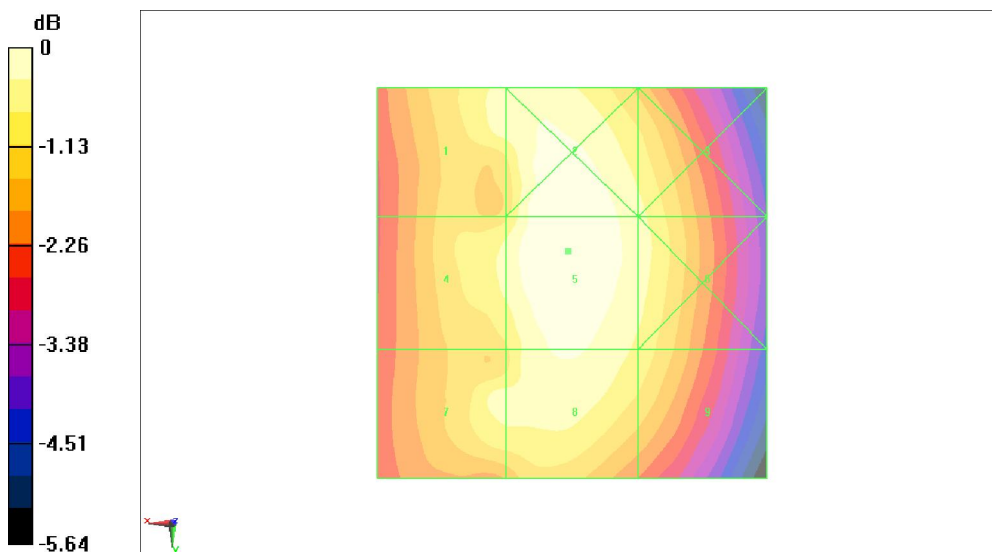

0 dB = 77.2V/m

**Fig B.2 HAC RF E-Field CDMA 835 Middle**

**HAC RF E-Field CDMA 835 Low – SO55**

**Date/Time: 8/23/2011 1:39:39 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 63.4 V/m

Probe Modulation Factor = 0.939


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 86.2 V/m; Power Drift = 0.00248 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>59.4 M4</b>	Grid 2 <b>62.6 M4</b>	Grid 3 <b>59.5 M4</b>
Grid 4 <b>60.4 M4</b>	Grid 5 <b>63.4 M4</b>	Grid 6 <b>60.2 M4</b>
Grid 7 <b>57.9 M4</b>	Grid 8 <b>61.1 M4</b>	Grid 9 <b>58.3 M4</b>

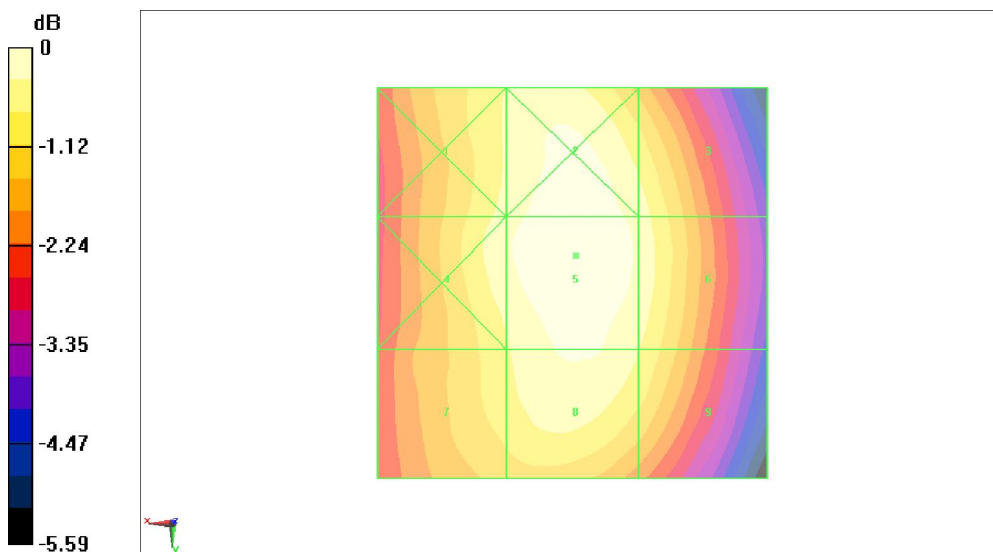

0 dB = 63.4V/m

**Fig B.3 HAC RF E-Field CDMA 835 Low**

**HAC RF E-Field CDMA 1900 High – SO55**

**Date/Time: 8/23/2011 2:32:43 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 42.9 V/m

Probe Modulation Factor = 0.929


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 47.4 V/m; Power Drift = -0.041 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>29.2 M4</b>	Grid 2 <b>29.9 M4</b>	Grid 3 <b>30 M4</b>
Grid 4 <b>34.4 M4</b>	Grid 5 <b>42.9 M4</b>	Grid 6 <b>42 M4</b>
Grid 7 <b>44.2 M4</b>	Grid 8 <b>46.7 M4</b>	Grid 9 <b>44.4 M4</b>

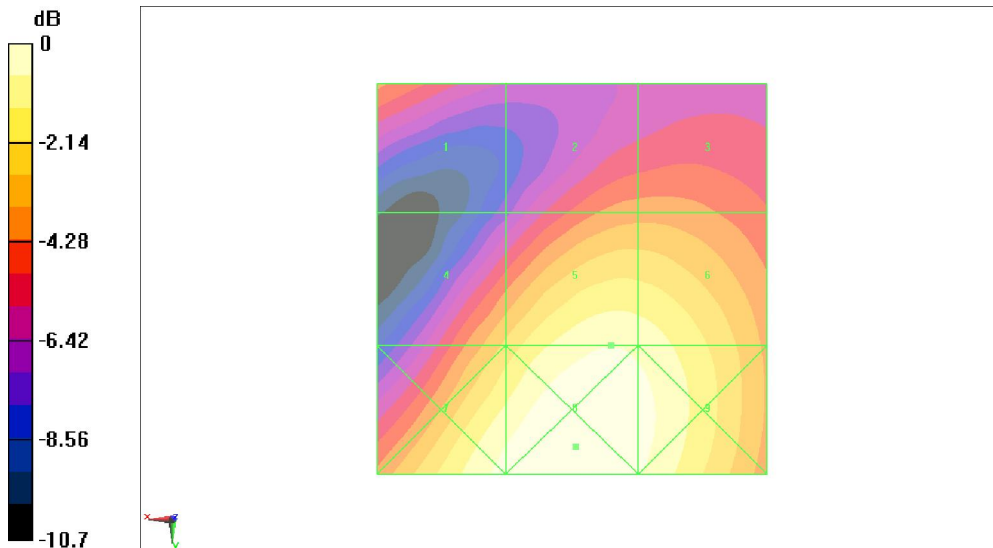

0 dB = 46.7V/m

**Fig B.4 HAC RF E-Field CDMA 1900 High**

**HAC RF E-Field CDMA 1900 Middle – SO55**

**Date/Time: 8/23/2011 2:23:36 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 44 V/m

Probe Modulation Factor = 0.936


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 48.7 V/m; Power Drift = -0.186 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>30.3 M4</b>	Grid 2 <b>30.9 M4</b>	Grid 3 <b>30.9 M4</b>
Grid 4 <b>35.9 M4</b>	Grid 5 <b>44 M4</b>	Grid 6 <b>42.8 M4</b>
Grid 7 <b>46.1 M4</b>	Grid 8 <b>48.2 M4</b>	Grid 9 <b>45.2 M4</b>

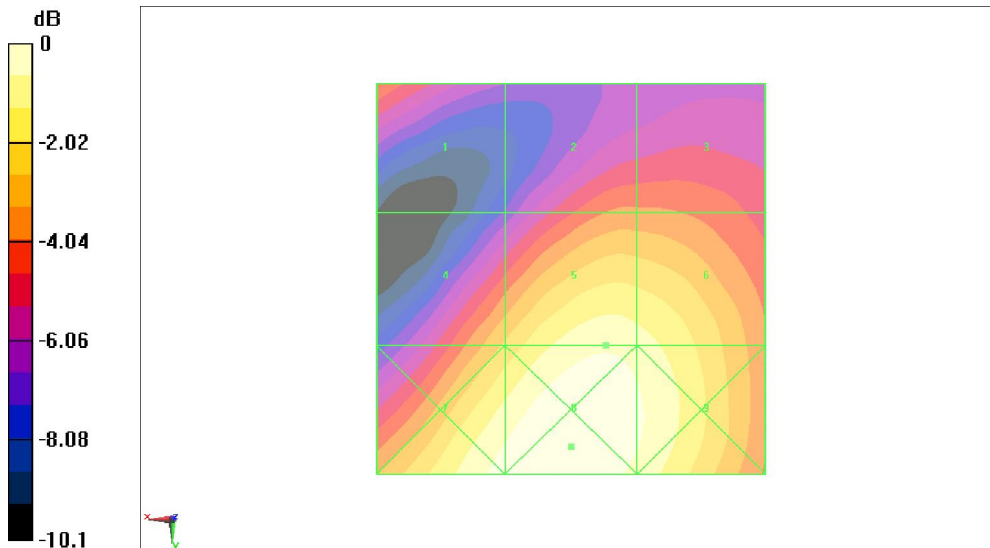

0 dB = 48.2V/m

**Fig B.5 HAC RF E-Field CDMA 1900 Middle**



**HAC RF E-Field CDMA 1900 Low – SO55**

**Date/Time: 8/23/2011 2:18:09 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 47.4 V/m

Probe Modulation Factor = 0.938


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 52.4 V/m; Power Drift = -0.061 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>31.9 M4</b>	Grid 2 <b>33.5 M4</b>	Grid 3 <b>33.7 M4</b>
Grid 4 <b>39.4 M4</b>	Grid 5 <b>47.4 M4</b>	Grid 6 <b>46.5 M4</b>
Grid 7 <b>50.5 M4</b>	Grid 8 <b>52.6 M4</b>	Grid 9 <b>49.1 M4</b>

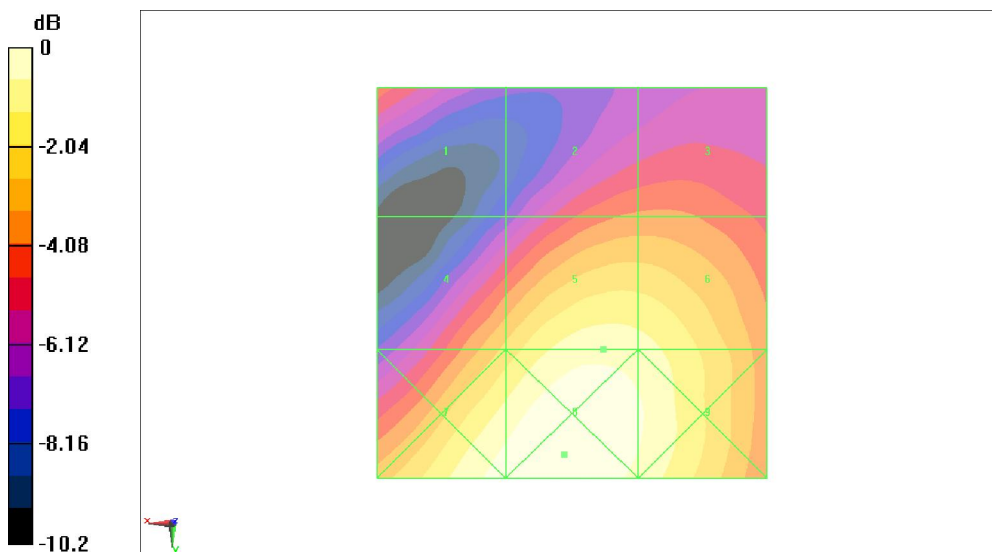

0 dB = 52.6V/m

**Fig B.6 HAC RF E-Field CDMA 1900 Low**

**HAC RF E-Field CDMA 835 High – SO3**

**Date/Time: 8/23/2011 1:09:28 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 60 V/m

Probe Modulation Factor = 2.9


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.3 V/m; Power Drift = 0.042 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>54.9 M4</b>	Grid 2 <b>59.4 M4</b>	Grid 3 <b>57.7 M4</b>
Grid 4 <b>55.8 M4</b>	Grid 5 <b>60 M4</b>	Grid 6 <b>58.3 M4</b>
Grid 7 <b>55.4 M4</b>	Grid 8 <b>59.1 M4</b>	Grid 9 <b>57.2 M4</b>

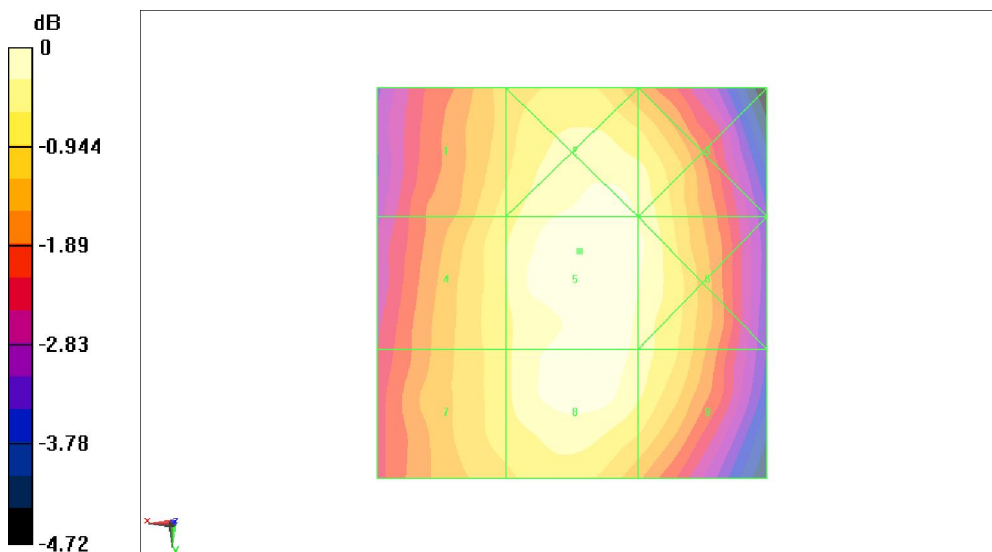

0 dB = 60V/m

**Fig B.7 HAC RF E-Field CDMA 835 High**

**HAC RF E-Field CDMA 835 Middle – SO3**

**Date/Time: 8/23/2011 1:14:52 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 66.8 V/m

Probe Modulation Factor = 2.92


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.6 V/m; Power Drift = 0.167 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>59.2 M4</b>	Grid 2 <b>64.6 M4</b>	Grid 3 <b>63.2 M4</b>
Grid 4 <b>61 M4</b>	Grid 5 <b>66.8 M4</b>	Grid 6 <b>64.3 M4</b>
Grid 7 <b>61.1 M4</b>	Grid 8 <b>65.6 M4</b>	Grid 9 <b>63.4 M4</b>

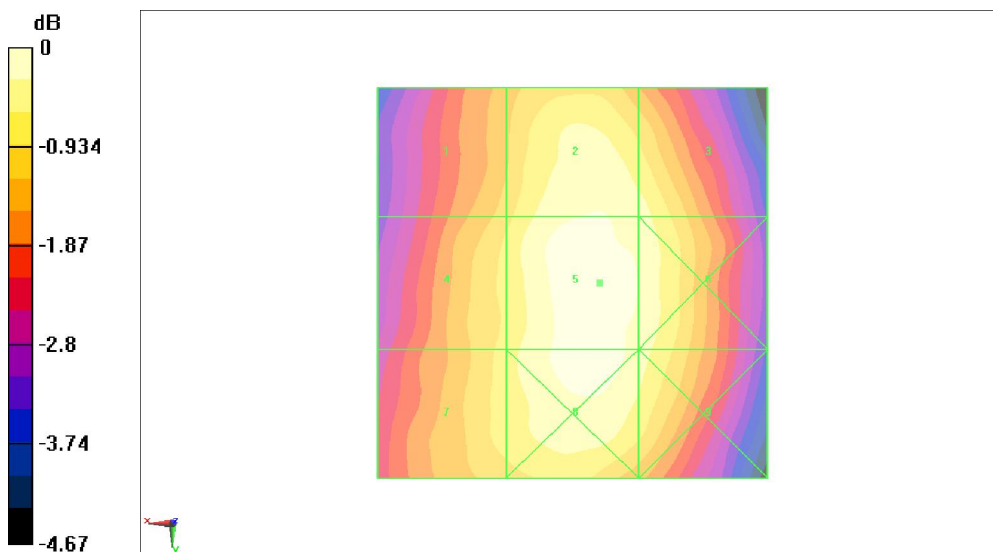

0 dB = 66.8V/m

**Fig B.8 HAC RF E-Field CDMA 835 Middle**

**HAC RF E-Field CDMA 835 Low – SO3**

**Date/Time: 8/23/2011 1:26:14 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 62.1 V/m

Probe Modulation Factor = 2.94


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.8 V/m; Power Drift = 0.066 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>56.8 M4</b>	Grid 2 <b>61 M4</b>	Grid 3 <b>59.3 M4</b>
Grid 4 <b>57.6 M4</b>	Grid 5 <b>62.1 M4</b>	Grid 6 <b>60.3 M4</b>
Grid 7 <b>57.1 M4</b>	Grid 8 <b>61 M4</b>	Grid 9 <b>58.8 M4</b>

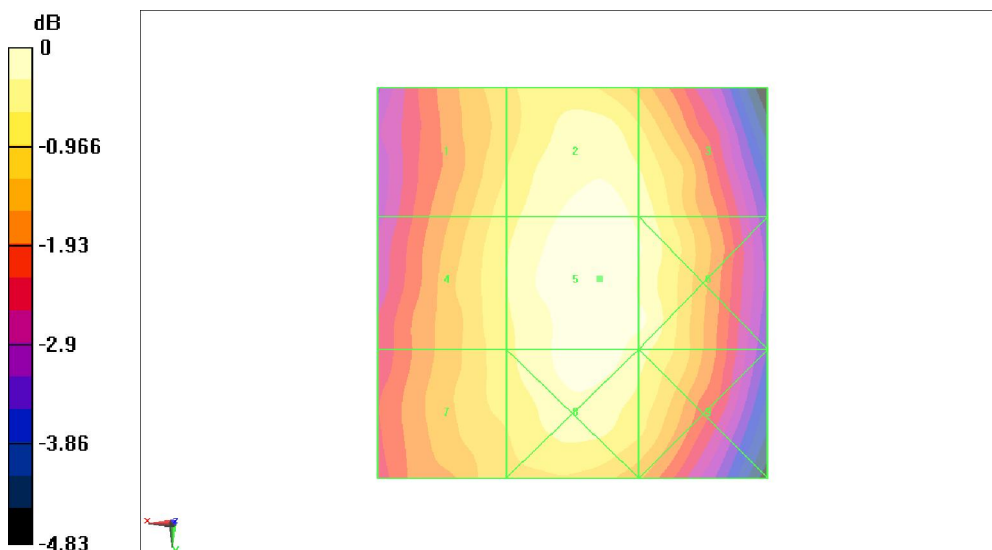

0 dB = 62.1V/m

**Fig B.9 HAC RF E-Field CDMA 835 Low**

**HAC RF E-Field CDMA 1900 High – SO3**

**Date/Time: 8/23/2011 2:48:50 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 51.3 V/m

Probe Modulation Factor = 2.93


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19 V/m; Power Drift = -0.165 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>31.9 M4</b>	Grid 2 <b>38.3 M4</b>	Grid 3 <b>38.6 M4</b>
Grid 4 <b>37.3 M4</b>	Grid 5 <b>51.3 M4</b>	Grid 6 <b>51.2 M4</b>
Grid 7 <b>47.4 M4</b>	Grid 8 <b>54 M4</b>	Grid 9 <b>53.5 M4</b>

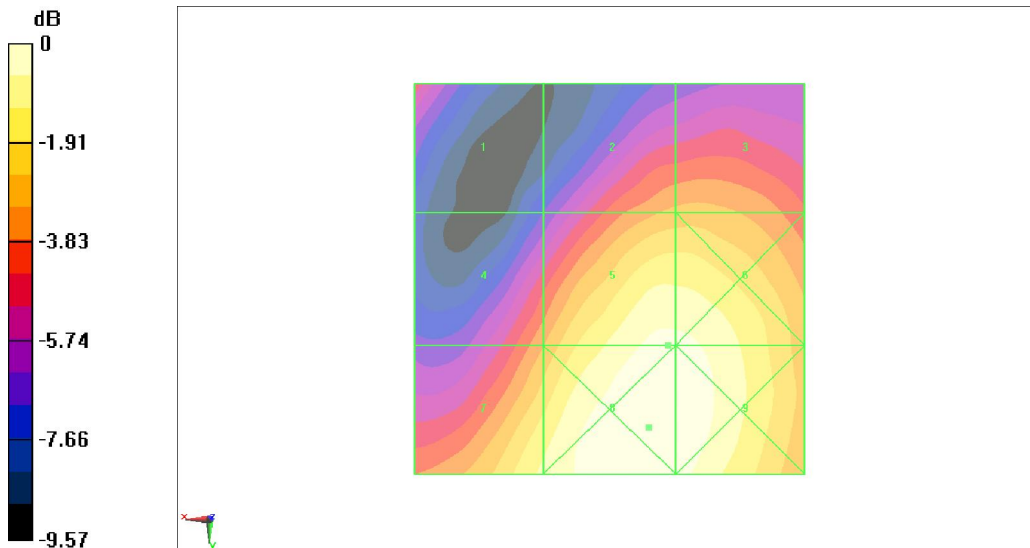

0 dB = 54V/m

**Fig B.10 HAC RF E-Field CDMA 1900 High**

**HAC RF E-Field CDMA 1900 Middle – SO3**

**Date/Time: 8/23/2011 2:57:24 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device 2/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.1 V/m

Probe Modulation Factor = 2.87


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.8 V/m; Power Drift = 0.056 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>29.4 M4</b>	Grid 2 <b>40.8 M4</b>	Grid 3 <b>40.8 M4</b>
Grid 4 <b>41.1 M4</b>	Grid 5 <b>54.1 M4</b>	Grid 6 <b>54 M4</b>
Grid 7 <b>50.8 M4</b>	Grid 8 <b>57.1 M4</b>	Grid 9 <b>55.8 M4</b>

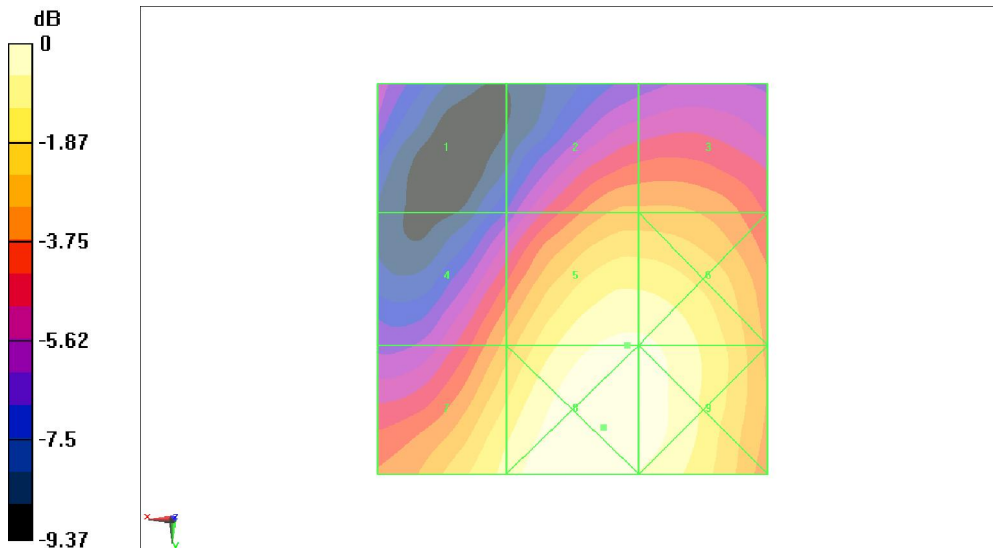

0 dB = 57.1V/m

**Fig B.11 HAC RF E-Field CDMA 1900 Middle**

**HAC RF E-Field CDMA 1900 Low – SO3**

**Date/Time: 8/23/2011 3:20:54 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.9 V/m

Probe Modulation Factor = 2.91


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.9 V/m; Power Drift = -0.096 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>31.8 M4</b>	Grid 2 <b>40.9 M4</b>	Grid 3 <b>41.2 M4</b>
Grid 4 <b>42.1 M4</b>	Grid 5 <b>54.9 M4</b>	Grid 6 <b>54.3 M4</b>
Grid 7 <b>51.6 M4</b>	Grid 8 <b>57.9 M4</b>	Grid 9 <b>56.6 M4</b>

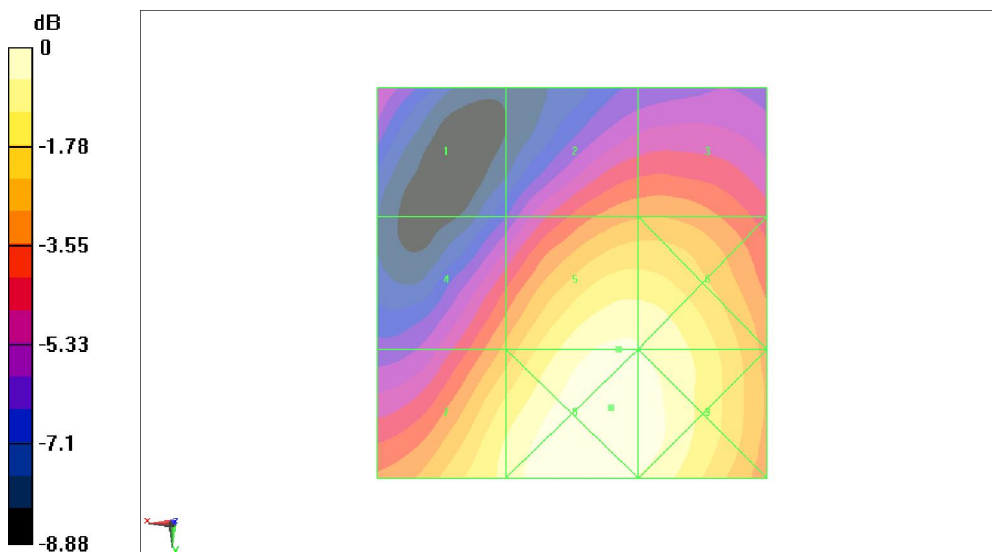

0 dB = 57.9V/m

**Fig B.12 HAC RF E-Field CDMA 1900 Low**

**HAC RF H-Field CDMA 835 High – SO55**

**Date/Time: 8/23/2011 5:50:37 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.099 A/m

Probe Modulation Factor = 0.901


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.079 A/m; Power Drift = 0.045 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.147 M4</b>	Grid 2 <b>0.099 M4</b>	Grid 3 <b>0.058 M4</b>
Grid 4 <b>0.142 M4</b>	Grid 5 <b>0.096 M4</b>	Grid 6 <b>0.055 M4</b>
Grid 7 <b>0.147 M4</b>	Grid 8 <b>0.099 M4</b>	Grid 9 <b>0.059 M4</b>

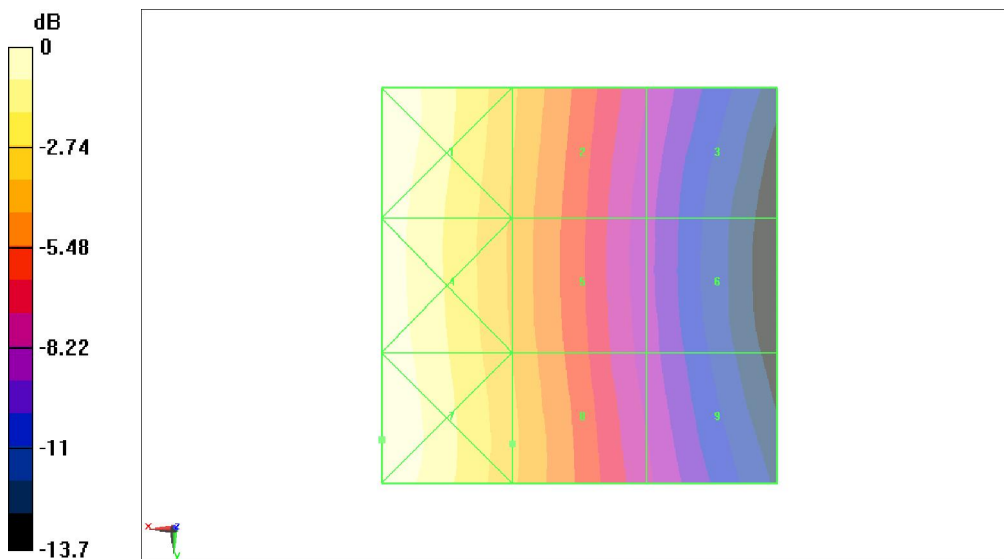

0 dB = 0.147A/m

**Fig B.13 HAC RF H-Field CDMA 835 High**



**HAC RF H-Field CDMA 835 Middle – SO55**

**Date/Time: 8/23/2011 5:59:58 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.100 A/m

Probe Modulation Factor = 0.893


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.081 A/m; Power Drift = -0.00136 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.147 M4</b>	Grid 2 <b>0.099 M4</b>	Grid 3 <b>0.057 M4</b>
Grid 4 <b>0.143 M4</b>	Grid 5 <b>0.097 M4</b>	Grid 6 <b>0.056 M4</b>
Grid 7 <b>0.148 M4</b>	Grid 8 <b>0.100 M4</b>	Grid 9 <b>0.060 M4</b>

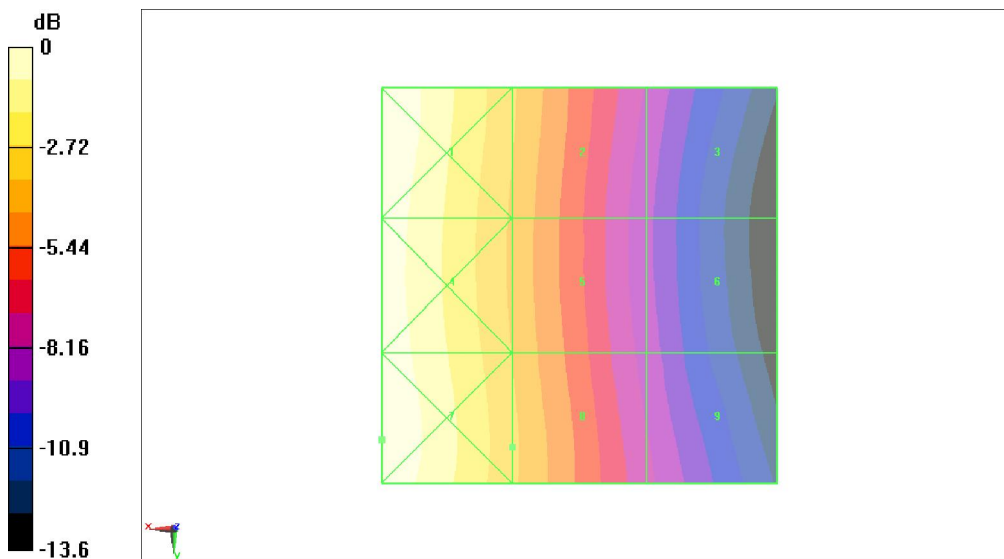

0 dB = 0.148A/m

**Fig B.14 HAC RF H-Field CDMA 835 Middle**

**HAC RF H-Field CDMA 835 Low – SO55**

**Date/Time: 8/23/2011 6:29:43 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.086 A/m

Probe Modulation Factor = 0.902


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.069 A/m; Power Drift = -0.012 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.126 M4</b>	Grid 2 <b>0.086 M4</b>	Grid 3 <b>0.051 M4</b>
Grid 4 <b>0.122 M4</b>	Grid 5 <b>0.083 M4</b>	Grid 6 <b>0.048 M4</b>
Grid 7 <b>0.125 M4</b>	Grid 8 <b>0.086 M4</b>	Grid 9 <b>0.051 M4</b>

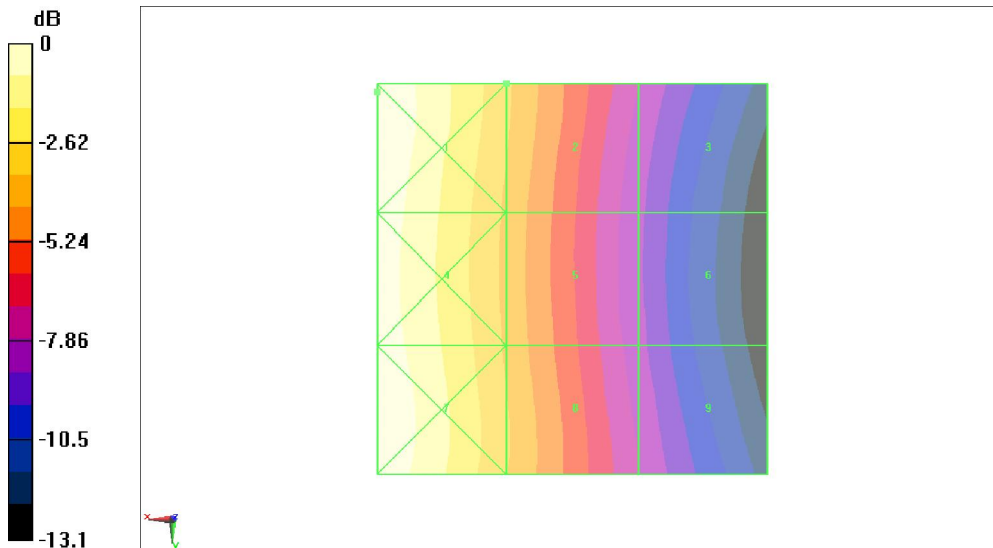

0 dB = 0.126A/m

**Fig B.15 HAC RF H-Field CDMA 835 Low**

**HAC RF H-Field CDMA 1900 High – SO55**

**Date/Time: 8/23/2011 5:05:35 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.102 A/m

Probe Modulation Factor = 0.917


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.108 A/m; Power Drift = -0.080 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.101 M4</b>	Grid 2 <b>0.102 M4</b>	Grid 3 <b>0.095 M4</b>
Grid 4 <b>0.106 M4</b>	Grid 5 <b>0.100 M4</b>	Grid 6 <b>0.091 M4</b>
Grid 7 <b>0.126 M4</b>	Grid 8 <b>0.093 M4</b>	Grid 9 <b>0.068 M4</b>

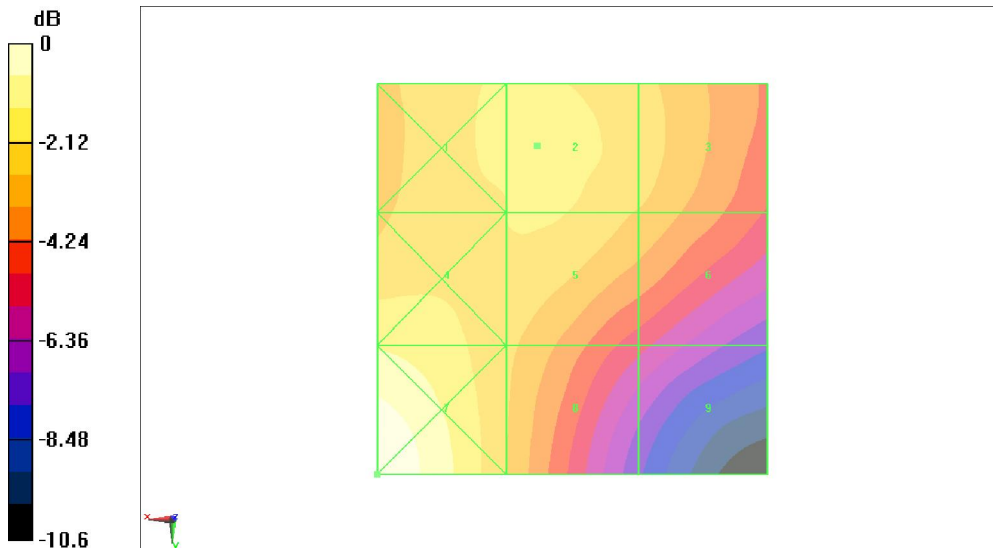

0 dB = 0.126A/m

**Fig B.16 HAC RF H-Field CDMA 1900 High**

**HAC RF H-Field CDMA 1900 Middle – SO55**

**Date/Time: 8/23/2011 4:48:01 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.101 A/m

Probe Modulation Factor = 0.937


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.107 A/m; Power Drift = -0.109 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.100 M4</b>	Grid 2 <b>0.101 M4</b>	Grid 3 <b>0.094 M4</b>
Grid 4 <b>0.109 M4</b>	Grid 5 <b>0.099 M4</b>	Grid 6 <b>0.090 M4</b>
Grid 7 <b>0.129 M4</b>	Grid 8 <b>0.094 M4</b>	Grid 9 <b>0.069 M4</b>

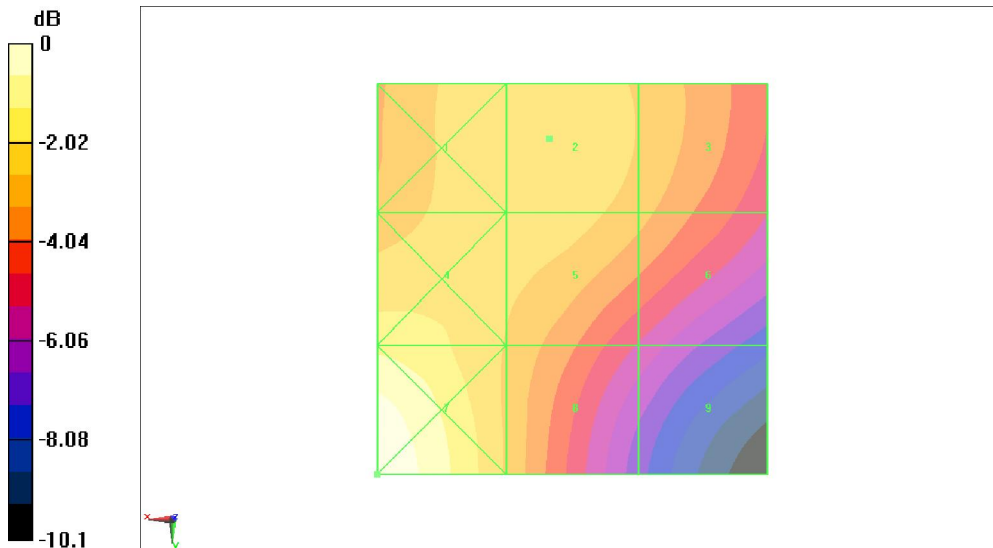

0 dB = 0.129A/m

**Fig B.17 HAC RF H-Field CDMA 1900 Middle**

**HAC RF H-Field CDMA 1900 Low – SO55**

**Date/Time: 8/23/2011 4:32:45 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.106 A/m

Probe Modulation Factor = 0.932


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.110 A/m; Power Drift = -0.00614 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.106 M4</b>	Grid 2 <b>0.106 M4</b>	Grid 3 <b>0.097 M4</b>
Grid 4 <b>0.112 M4</b>	Grid 5 <b>0.104 M4</b>	Grid 6 <b>0.093 M4</b>
Grid 7 <b>0.128 M4</b>	Grid 8 <b>0.097 M4</b>	Grid 9 <b>0.071 M4</b>

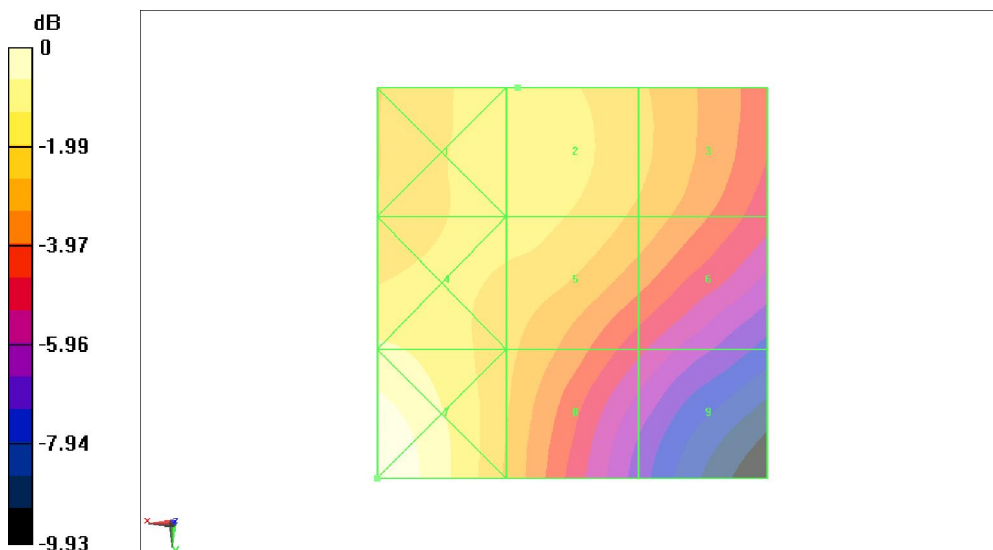

0 dB = 0.128A/m

**Fig B.18 HAC RF H-Field CDMA 1900 Low**

**HAC RF H-Field CDMA 835 High – SO3**

**Date/Time: 8/23/2011 6:44:31 AM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.110 A/m

Probe Modulation Factor = 2.89


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.028 A/m; Power Drift = -0.090 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.155 M4</b>	Grid 2 <b>0.108 M4</b>	Grid 3 <b>0.062 M4</b>
Grid 4 <b>0.154 M4</b>	Grid 5 <b>0.106 M4</b>	Grid 6 <b>0.063 M4</b>
Grid 7 <b>0.159 M4</b>	Grid 8 <b>0.110 M4</b>	Grid 9 <b>0.066 M4</b>

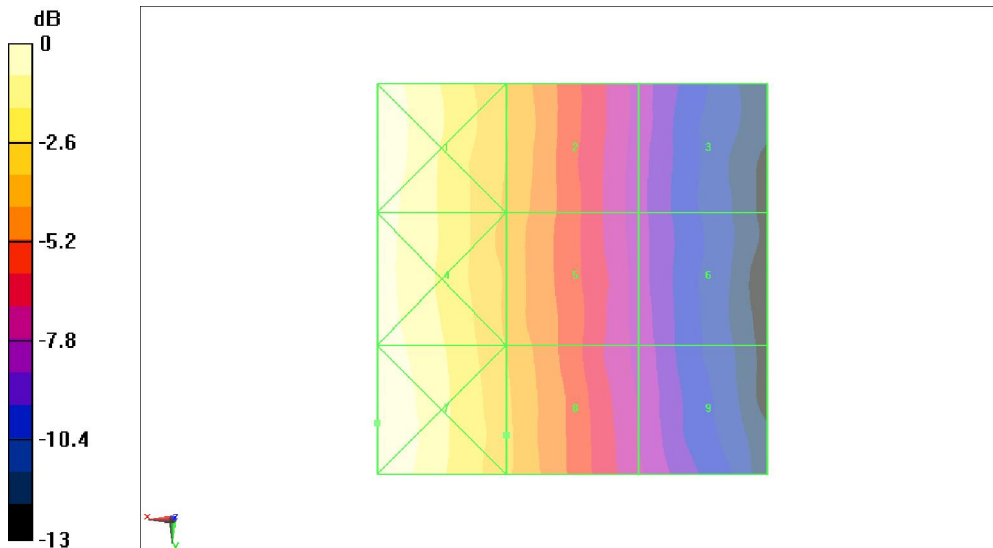

0 dB = 0.159A/m

**Fig B.19 HAC RF H-Field CDMA 835 High**

**HAC RF H-Field CDMA 835 Middle – SO3**

**Date/Time: 8/23/2011 6:56:13 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.112 A/m

Probe Modulation Factor = 2.82


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.030 A/m; Power Drift = 0.185 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.154 M4</b>	Grid 2 <b>0.110 M4</b>	Grid 3 <b>0.097 M4</b>
Grid 4 <b>0.155 M4</b>	Grid 5 <b>0.109 M4</b>	Grid 6 <b>0.065 M4</b>
Grid 7 <b>0.160 M4</b>	Grid 8 <b>0.112 M4</b>	Grid 9 <b>0.069 M4</b>

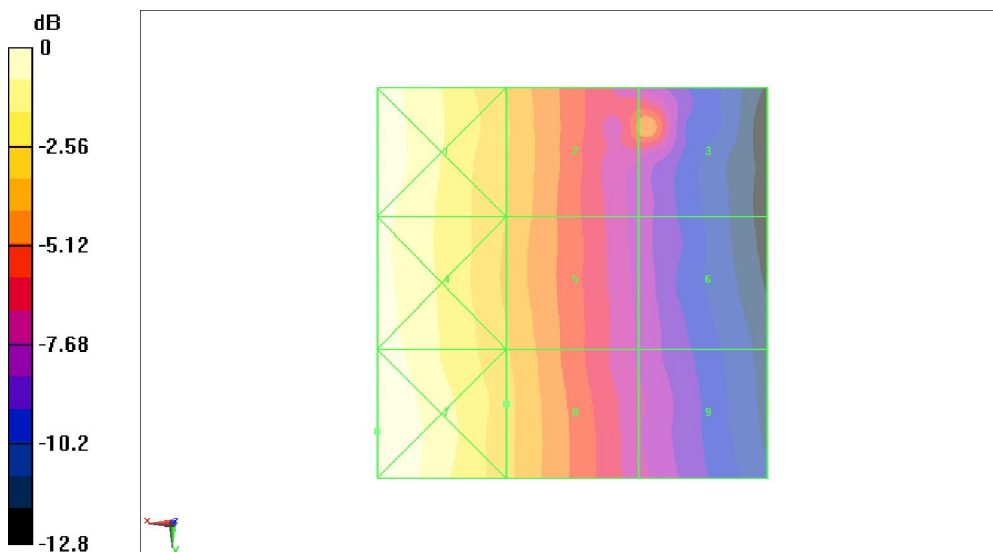

0 dB = 0.160A/m

**Fig B.20 HAC RF H-Field CDMA 835 Middle**

**HAC RF H-Field CDMA 835 Low – SO3**

**Date/Time: 8/23/2011 7:01:44 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.088 A/m

Probe Modulation Factor = 2.62


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.025 A/m; Power Drift = -0.053 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.125 M4</b>	Grid 2 <b>0.087 M4</b>	Grid 3 <b>0.052 M4</b>
Grid 4 <b>0.123 M4</b>	Grid 5 <b>0.084 M4</b>	Grid 6 <b>0.049 M4</b>
Grid 7 <b>0.128 M4</b>	Grid 8 <b>0.088 M4</b>	Grid 9 <b>0.052 M4</b>

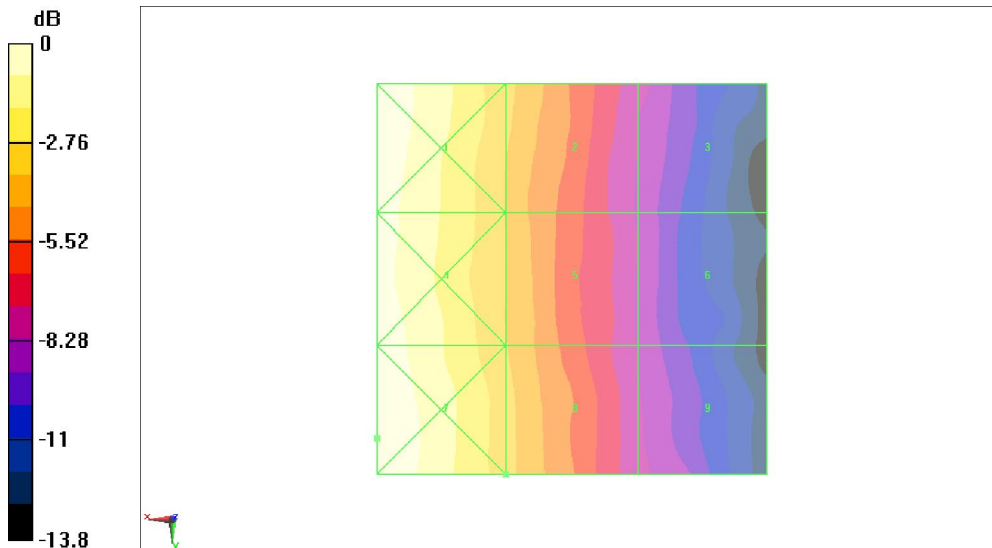

0 dB = 0.128A/m

**Fig B.21 HAC RF H-Field CDMA 835 Low**



**HAC RF H-Field CDMA 1900 High – SO3**

**Date/Time: 8/23/2011 3:57:58 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.124 A/m

Probe Modulation Factor = 2.83


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.040 A/m; Power Drift = -0.083 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.110 M4</b>	Grid 2 <b>0.110 M4</b>	Grid 3 <b>0.096 M4</b>
Grid 4 <b>0.142 M4</b>	Grid 5 <b>0.124 M4</b>	Grid 6 <b>0.095 M4</b>
Grid 7 <b>0.186 M4</b>	Grid 8 <b>0.171 M4</b>	Grid 9 <b>0.084 M4</b>

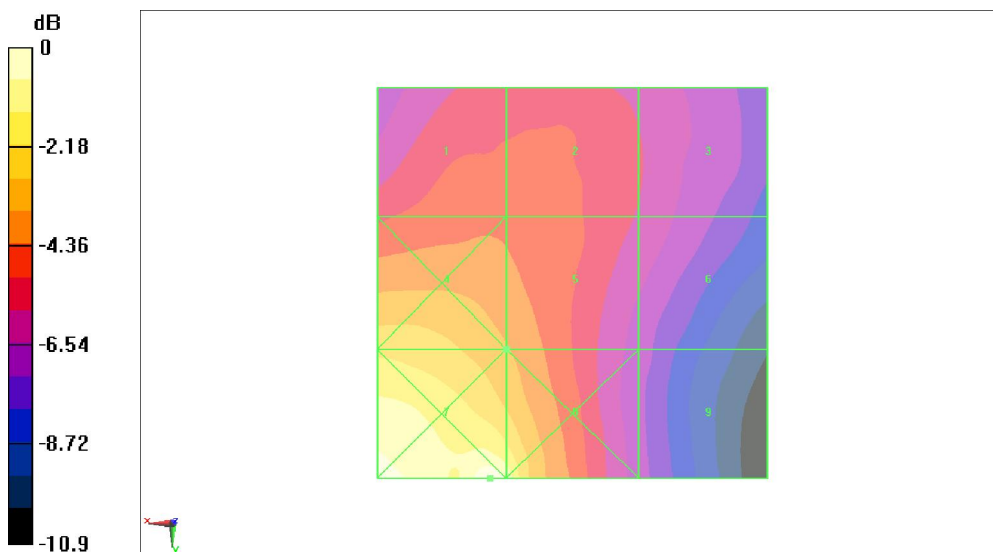

0 dB = 0.186A/m

**Fig B.22 HAC RF H-Field CDMA 1900 High**

**HAC RF H-Field CDMA 1900 Middle – SO3**

**Date/Time: 8/23/2011 4:03:42 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.193 A/m

Probe Modulation Factor = 2.93


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.041 A/m; Power Drift = 0.013 dB

**Hearing Aid Near-Field Category: M3 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.122 M4</b>	Grid 2 <b>0.177 M4</b>	Grid 3 <b>0.205 M3</b>
Grid 4 <b>0.156 M4</b>	Grid 5 <b>0.154 M4</b>	Grid 6 <b>0.167 M4</b>
Grid 7 <b>0.193 M3</b>	Grid 8 <b>0.184 M4</b>	Grid 9 <b>0.092 M4</b>

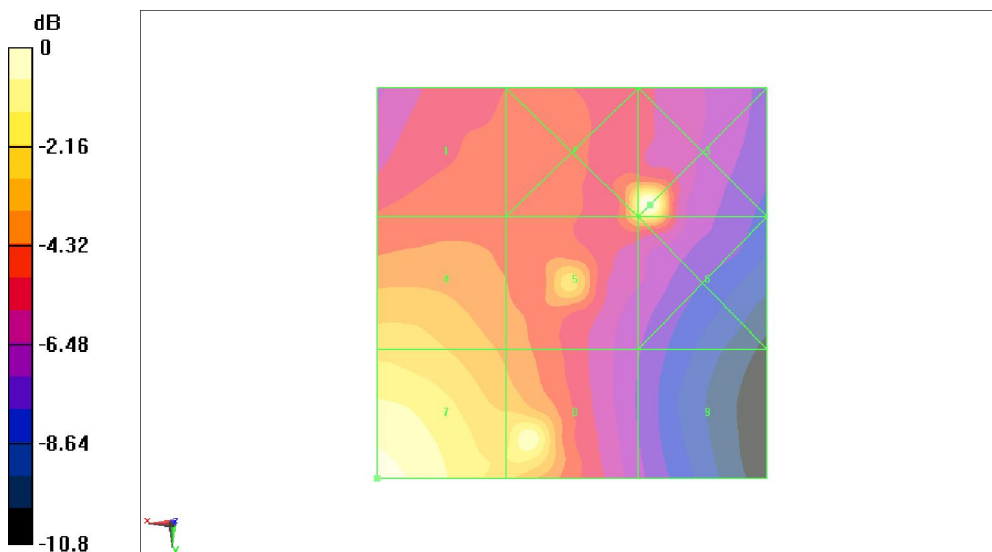

0 dB = 0.205A/m

**Fig B.23 HAC RF H-Field CDMA 1900 Middle**

**HAC RF H-Field CDMA 1900 Low – SO3**

**Date/Time: 8/23/2011 4:19:38 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6260;

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.132 A/m

Probe Modulation Factor = 2.76


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.043 A/m; Power Drift = -0.141 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.132 M4</b>	Grid 2 <b>0.128 M4</b>	Grid 3 <b>0.106 M4</b>
Grid 4 <b>0.148 M4</b>	Grid 5 <b>0.127 M4</b>	Grid 6 <b>0.103 M4</b>
Grid 7 <b>0.179 M4</b>	Grid 8 <b>0.140 M4</b>	Grid 9 <b>0.088 M4</b>

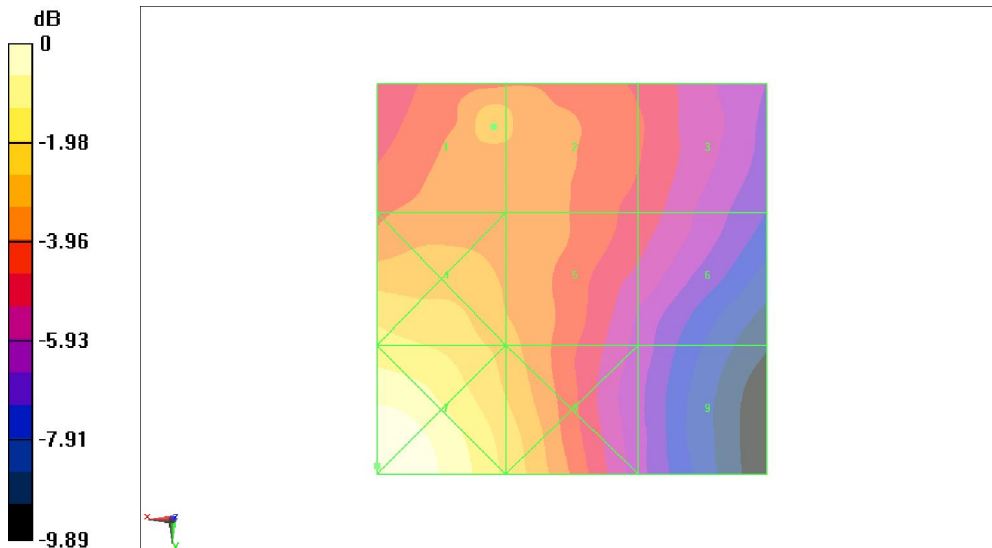

0 dB = 0.179A/m

**Fig B.24 HAC RF H-Field CDMA 1900 Low**

**Total M-rating of CDMA 835 MHz Band – SO55**

**Date/Time: 8/23/2011 1:53:10 PM, Date/Time: 8/23/2011 5:59:58 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428Probe: H3DV6 - SN6260;ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 77.2 V/m

Probe Modulation Factor = 0.929

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 105.8 V/m; Power Drift = -0.066 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 72.5 M4	Grid 2 76.5 M4	Grid 3 71.9 M4
Grid 4 72 M4	Grid 5 77.2 M4	Grid 6 72.7 M4
Grid 7 72 M4	Grid 8 74.3 M4	Grid 9 70.1 M4

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.100 A/m

Probe Modulation Factor = 0.893


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.081 A/m; Power Drift = -0.00136 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 0.147 M4	Grid 2 0.099 M4	Grid 3 0.057 M4
Grid 4 0.143 M4	Grid 5 0.097 M4	Grid 6 0.056 M4
Grid 7 0.148 M4	Grid 8 0.100 M4	Grid 9 0.060 M4

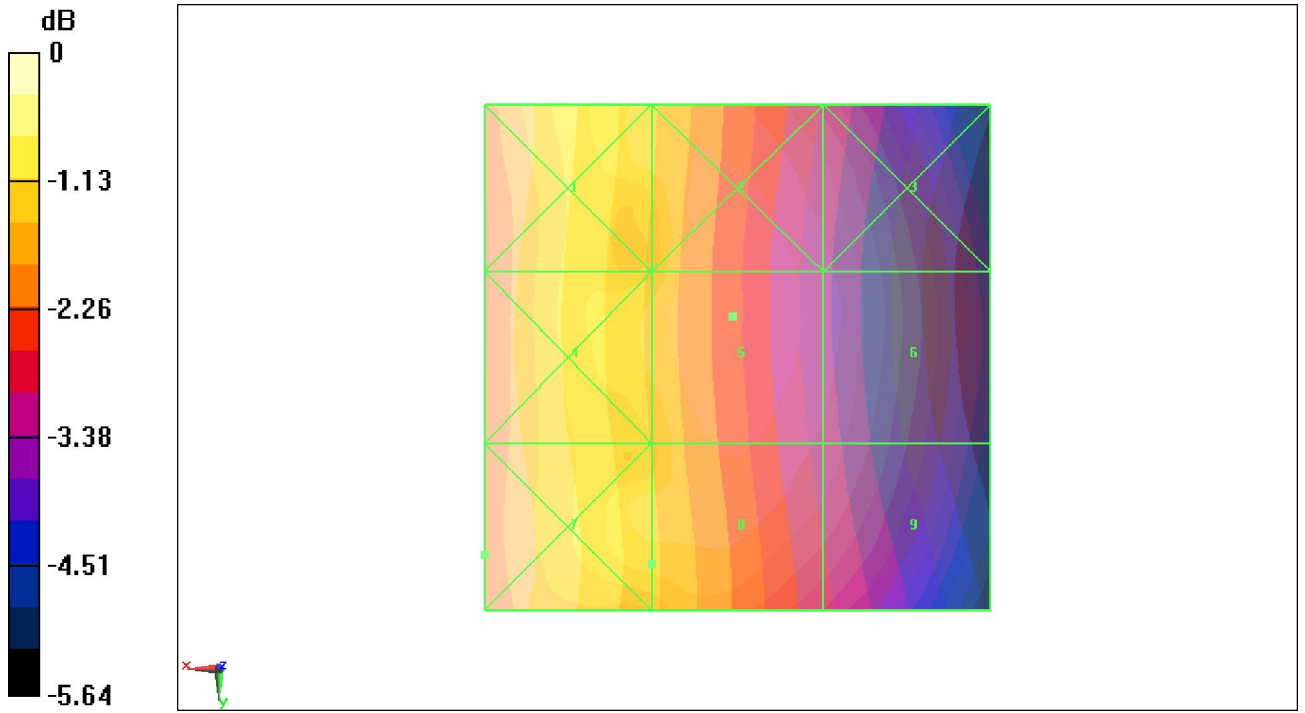

0 dB = 77.2V/m

RF RESULTS AND M-RATING	E-Field M Rating	<b>M4 (AWF 0 dB)</b>
	H-Field M Rating	<b>M4 (AWF 0 dB)</b>
	<b>Total M Rating</b>	<b>M4</b>

**Fig B.25 Total M-rating of CDMA 835**

**Total M-rating of CDMA 1900 MHz Band – SO55**

**Date/Time: 8/23/2011 2:23:36 PM, Date/Time: 8/23/2011 4:32:45 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428Probe: H3DV6 - SN6260;ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 47.4 V/m

Probe Modulation Factor = 0.938

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 52.4 V/m; Power Drift = -0.061 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>31.9 M4</b>	Grid 2 <b>33.5 M4</b>	Grid 3 <b>33.7 M4</b>
Grid 4 <b>39.4 M4</b>	Grid 5 <b>47.4 M4</b>	Grid 6 <b>46.5 M4</b>
Grid 7 <b>50.5 M4</b>	Grid 8 <b>52.6 M4</b>	Grid 9 <b>49.1 M4</b>

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.106 A/m

Probe Modulation Factor = 0.932


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.110 A/m; Power Drift = -0.00614 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.106 M4</b>	Grid 2 <b>0.106 M4</b>	Grid 3 <b>0.097 M4</b>
Grid 4 <b>0.112 M4</b>	Grid 5 <b>0.104 M4</b>	Grid 6 <b>0.093 M4</b>
Grid 7 <b>0.128 M4</b>	Grid 8 <b>0.097 M4</b>	Grid 9 <b>0.071 M4</b>

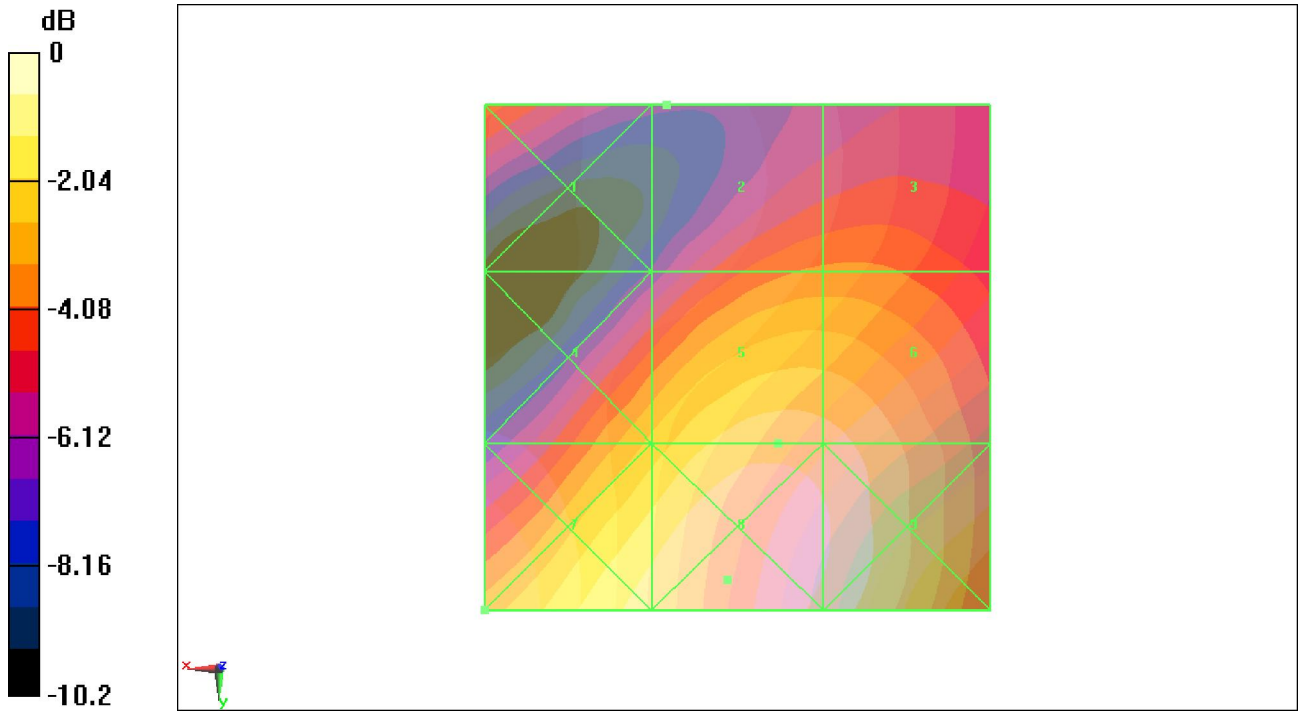

0 dB = 52.6V/m

RF RESULTS AND MRATING	E-Field MRating	M4 (AVF 0 dB)
	H-Field MRating	M4 (AVF 0 dB)
	Total MRating	M4

Fig B.26 Total M-rating of CDMA 1900

**Total M-rating of CDMA 835 MHz Band – SO3**

**Date/Time: 8/23/2011 1:14:52 PM, Date/Time: 8/23/2011 6:56:13 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 835; Frequency: 848.31 MHz, Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428Probe: H3DV6 - SN6260;ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 66.8 V/m

Probe Modulation Factor = 2.92

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.6 V/m; Power Drift = 0.167 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>59.3 M4</b>	<b>64.7 M4</b>	<b>63.3 M4</b>
Grid 4	Grid 5	Grid 6
<b>61.1 M4</b>	<b>66.8 M4</b>	<b>64.4 M4</b>
Grid 7	Grid 8	Grid 9
<b>61.2 M4</b>	<b>65.7 M4</b>	<b>63.5 M4</b>

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.112 A/m

Probe Modulation Factor = 2.82

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.030 A/m; Power Drift = 0.185dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**



Peak H-field in A/m

Grid 1 <b>0.154 M4</b>	Grid 2 <b>0.110 M4</b>	Grid 3 <b>0.097 M4</b>
Grid 4 <b>0.155 M4</b>	Grid 5 <b>0.109 M4</b>	Grid 6 <b>0.065 M4</b>
Grid 7 <b>0.160 M4</b>	Grid 8 <b>0.112 M4</b>	Grid 9 <b>0.069 M4</b>

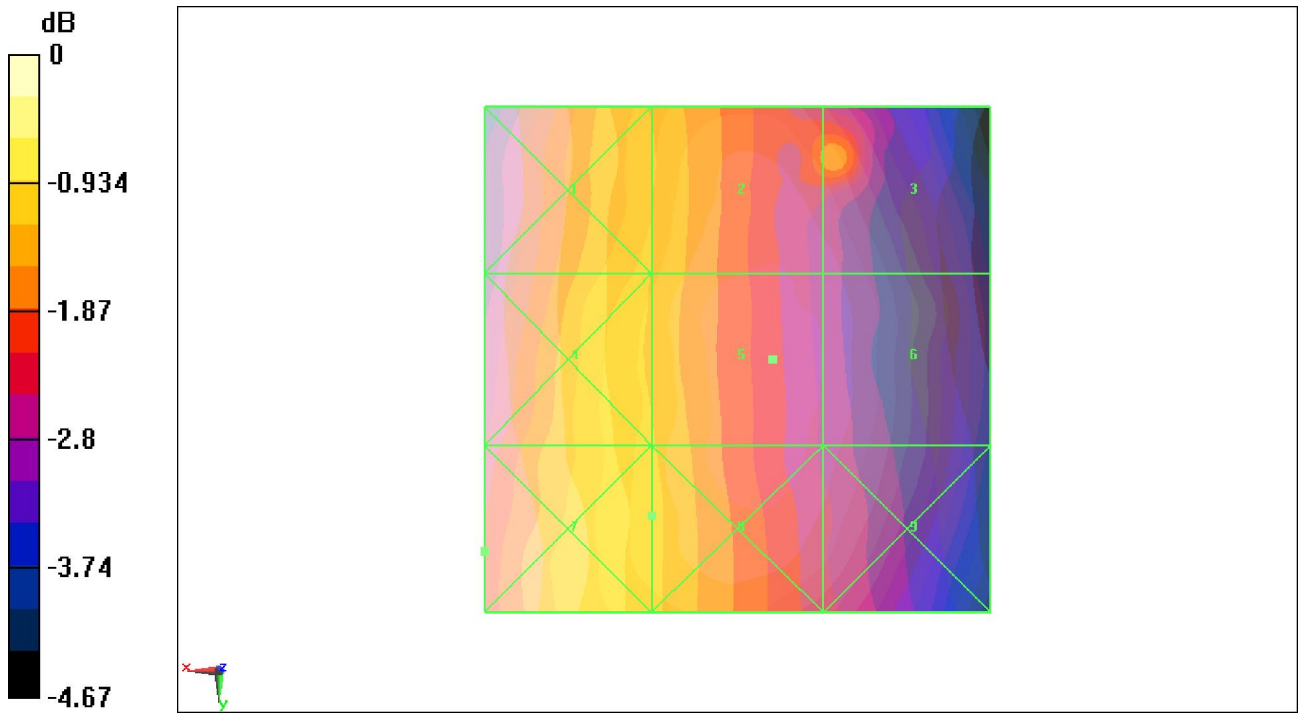

0 dB = 66.8V/m

RF RESULTS AND M-RATING	E-Field M Rating	<b>M4 (AWF 0 dB)</b>
	H-Field M Rating	<b>M4 (AWF 0 dB)</b>
	<b>Total M Rating</b>	<b>M4</b>

Fig B.27 Total M-rating of CDMA 835

**Total M-rating of CDMA 1900 MHz Band – SO3**

**Date/Time: 8/23/2011 3:20:54 PM, Date/Time: 8/23/2011 4:03:42 PM**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:23.3°C      Liquid Temperature: 22.5°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz, Frequency: 1880 MHz;  
Duty Cycle: 1:1

Probe: ER3DV6 - SN2428Probe: H3DV6 - SN6260;ConvF(1, 1, 1)

**E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.9 V/m

Probe Modulation Factor = 2.91

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.9 V/m; Power Drift = -0.096 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>31.8 M4</b>	<b>40.9 M4</b>	<b>41.2 M4</b>
Grid 4	Grid 5	Grid 6
<b>42.1 M4</b>	<b>54.9 M4</b>	<b>54.3 M4</b>
Grid 7	Grid 8	Grid 9
<b>51.6 M4</b>	<b>57.9 M4</b>	<b>56.6 M4</b>

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.193 A/m

Probe Modulation Factor = 2.93


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.041 A/m; Power Drift = 0.013 dB

**Hearing Aid Near-Field Category: M3 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.122 M4</b>	Grid 2 <b>0.177 M4</b>	Grid 3 <b>0.205 M3</b>
Grid 4 <b>0.156 M4</b>	Grid 5 <b>0.154 M4</b>	Grid 6 <b>0.167 M4</b>
Grid 7 <b>0.193 M3</b>	Grid 8 <b>0.184 M4</b>	Grid 9 <b>0.092 M4</b>

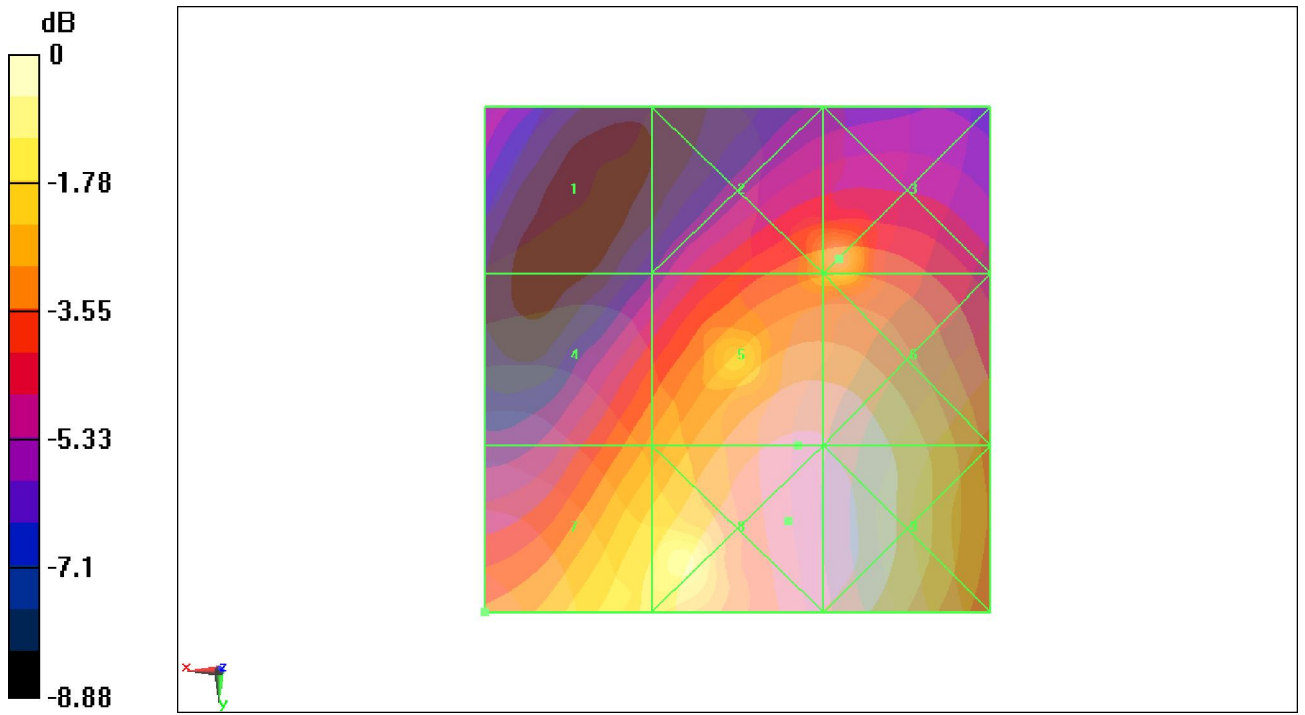

0 dB = 57.9V/m

RF RESULTS AND MRATING	E-Field MRating	<b>M4 (AVF 0 dB)</b>
	H-Field MRating	<b>M3 (AVF 0 dB)</b>
	Total MRating	<b>M3</b>

**Fig B.28 Total M-rating of CDMA 1900**

## ANNEX C SYSTEM VALIDATION RESULT

E SCAN of Dipole 835 MHz

Date/Time: 8/23/2011 7:11:25 AM

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0 \text{ nmo/m}$ ;  $\epsilon_r = 1$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 835 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

E Scan - measurement distance from the probe sensor center to 835 Dipole = 10mm / Hearing Aid Compatibility Test (41x361x1): Measurement grid dx=5mm, dy=5mm

Maximum value of peak Total field = 168.2 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 119.8 V/m; Power Drift = 0.035 dB

Hearing Aid Near-Field Category: M4 (AVF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>143.1 M4</b>	<b>145.6 M4</b>	<b>137.9 M4</b>
Grid 4	Grid 5	Grid 6
<b>80.0 M4</b>	<b>82.2 M4</b>	<b>79.1 M4</b>
Grid 7	Grid 8	Grid 9
<b>160.3 M4</b>	<b>168.2 M4</b>	<b>160.5 M4</b>

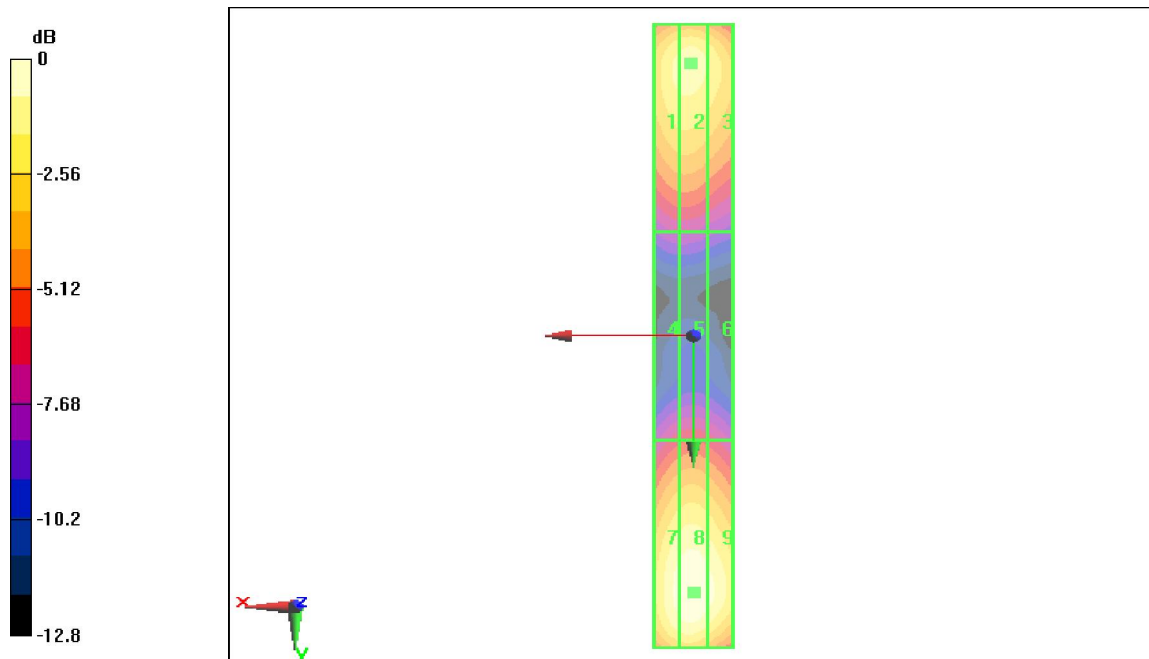

0 dB = 168.2V/m

**H SCAN of Dipole 835 MHz**

Date/Time: 8/23/2011 7:48:08 AM

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0 \text{ nho/m}$ ;  $\epsilon_r = 1$ ;  $\rho = 1 \text{ kg/m}^3$

Communication System: CW Frequency: 835 MHz; Duty Cycle: 1:1

Probe: HBDV6 - SN6260;

H Scan - measurement distance from the probe sensor center to 835 Dipole = 10mm  
Hearing Aid Compatibility Test (41x361x1): Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$

Maximum value of peak Total field = 0.447 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.463 A/m; Power Drift = 0.122 dB

Hearing Aid Near-Field Category: **M4** (AVF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.362 M4</b>	<b>0.386 M4</b>	<b>0.373 M4</b>
Grid 4	<b>Grid 5</b>	Grid 6
<b>0.421 M4</b>	<b>0.447 M4</b>	<b>0.434 M4</b>
Grid 7	Grid 8	Grid 9
<b>0.373 M4</b>	<b>0.403 M4</b>	<b>0.392 M4</b>

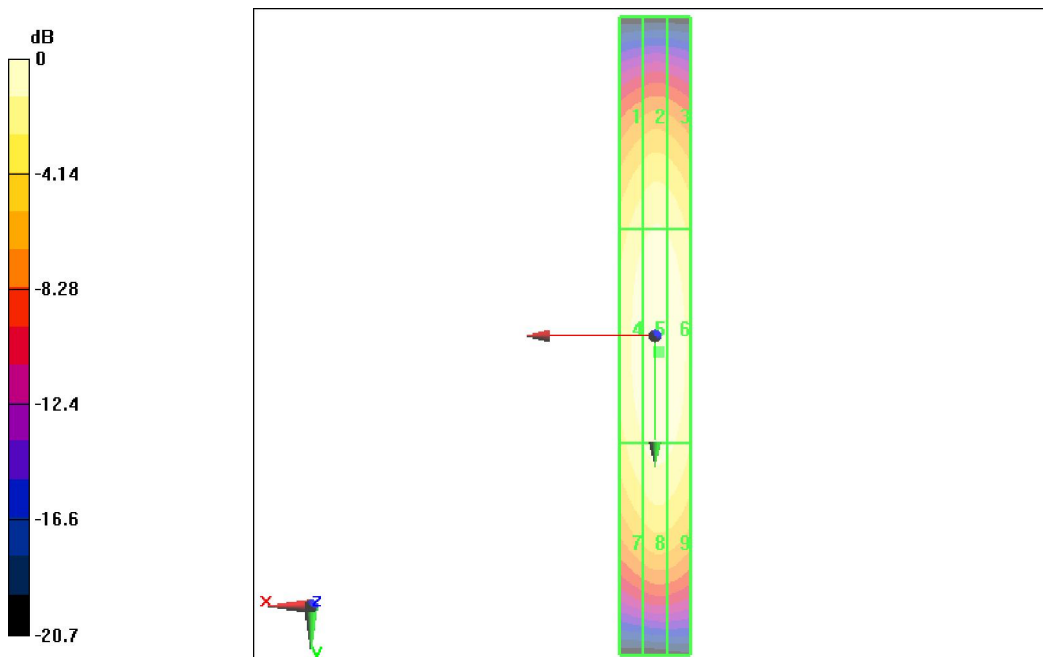

0 dB = 0.447A/m

**E SCAN of Dipole 1880 MHz**

Date/Time: 8/23/2011 8:19:33 AM

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0 \text{ nS/m}$ ;  $\epsilon_r = 1$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System CW Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2428; ConvF(1, 1, 1)

E Scan - measurement distance from the probe sensor center to  $\Phi 1880$  Dipole = 10mm  
Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 132.7 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 138.9 V/m; Power Drift = -0.002 dB

Hearing Aid Near-Field Category: **M2 (AVF 0 dB)**

Peak E-field in V/m

Grid 1 <b>124.9 M2</b>	Grid 2 <b>127.0 M2</b>	Grid 3 <b>119.3 M2</b>
Grid 4 <b>83.1 M3</b>	Grid 5 <b>85.7 M3</b>	Grid 6 <b>83.6 M3</b>
Grid 7 <b>129.8 M2</b>	Grid 8 <b>132.7 M2</b>	Grid 9 <b>124.1 M2</b>

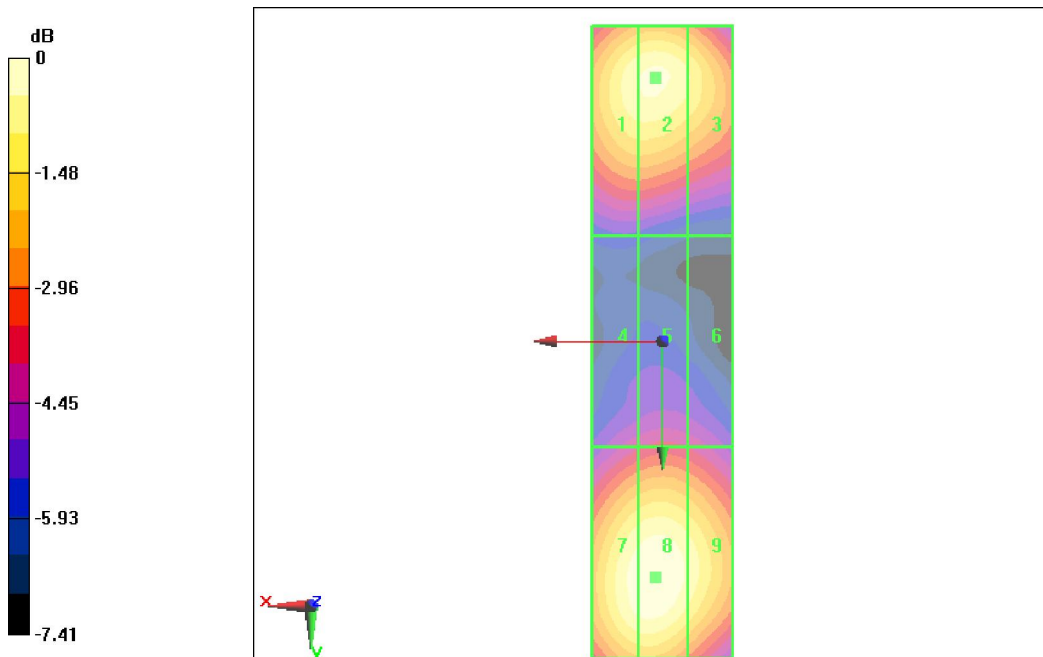

0 dB = 132.7V/m

**H SCAN of Dipole 1880 MHz**

Date/Time: 8/23/2011 8:45:53 AM

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used:  $\sigma = 0 \text{ nS/m}$ ;  $\epsilon_r = 1$ ;  $\rho = 1 \text{ kg/m}^3$

Communication System: CW Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: HBDV6 - SN6260;

H Scan - measurement distance from the probe sensor center to  $\Phi$ 1880 Dipole = 10mm  
Hearing Aid Compatibility Test (41x181x1): Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$

Maximum value of peak Total field = 0.441 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.441 A/m; Power Drift = -0.00694 dB

Hearing Aid Near-Field Category: **M2 (AVF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.371 M2</b>	<b>0.392 M2</b>	<b>0.387 M2</b>
Grid 4	Grid 5	Grid 6
<b>0.408 M2</b>	<b>0.441 M2</b>	<b>0.422 M2</b>
Grid 7	Grid 8	Grid 9
<b>0.371 M2</b>	<b>0.398 M2</b>	<b>0.392 M2</b>

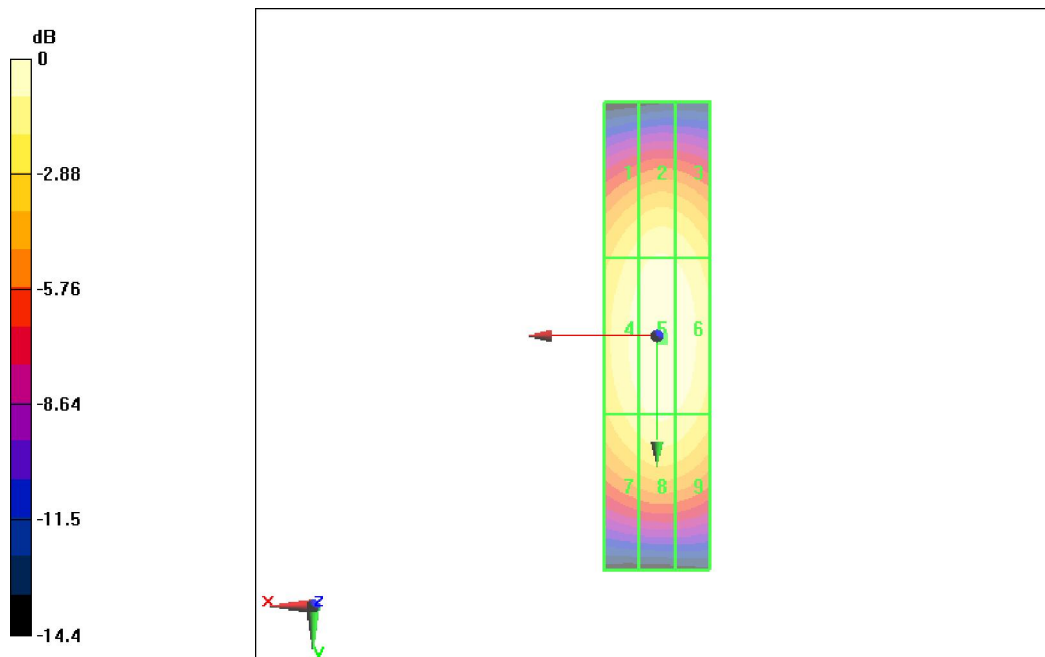

0 dB = 0.441 A/m

## ANNEX D PROBE CALIBRATION CERTIFICATE

E\_Probe ER3DV6

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **TMC**

Certificate No: ER3-2428\_Oct10

### CALIBRATION CERTIFICATE

Object: ER3DV6 - SN:2428

Calibration procedure(s): QA CAL-02.v5 and QA CAL-25.v2  
Calibration procedure for E-field probes optimized for close near field evaluations in air



Calibration date: October 20, 2010

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01030)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01030)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01030)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-10 (No. 217-01026)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-10 (No. 217-01028)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-10 (No. 217-01027)	Mar-11
Reference Probe ER3DV6	SN: 2328	3-Oct-10 (No. ER3-2328_Oct10)	Oct-11
DAE4	SN: 789	19-Dec-09 (No. DAE4-789_Dec09)	Dec-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 21, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

NORM <sub>x,y,z</sub>	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

**Methods Applied and Interpretation of Parameters:**

- *NORM<sub>x,y,z</sub>*: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- *NORM(f)<sub>x,y,z</sub>* = *NORM<sub>x,y,z</sub>* \* *frequency\_response* (see Frequency Response Chart).
- *DCP<sub>x,y,z</sub>*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM<sub>x</sub>* (no uncertainty required).

ER3DV6 SN:2428

October 20, 2010

# Probe ER3DV6

## SN:2428

Manufactured:	September 11, 2007
Last calibrated:	October 20, 2009
Recalibrated:	October 20, 2010

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ER3DV6 SN:2428

October 20, 2010

**DASY - Parameters of Probe: ER3DV6 SN:2428**

**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ )	1.52	1.59	1.86	$\pm 10.1\%$
DCP (mV) <sup>A</sup>	91.5	93.0	98.9	

**Modulation Calibration Parameters**

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc (k=2)
10000	CW		X	0.00	0.00	1.00	300	$\pm 1.5\%$
			Y	0.00	0.00	1.00	300	
			Z	0.00	0.00	1.00	300	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>A</sup> numerical linearization parameter: uncertainty not required

ER3DV6 SN:2428

October 20, 2010

### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)

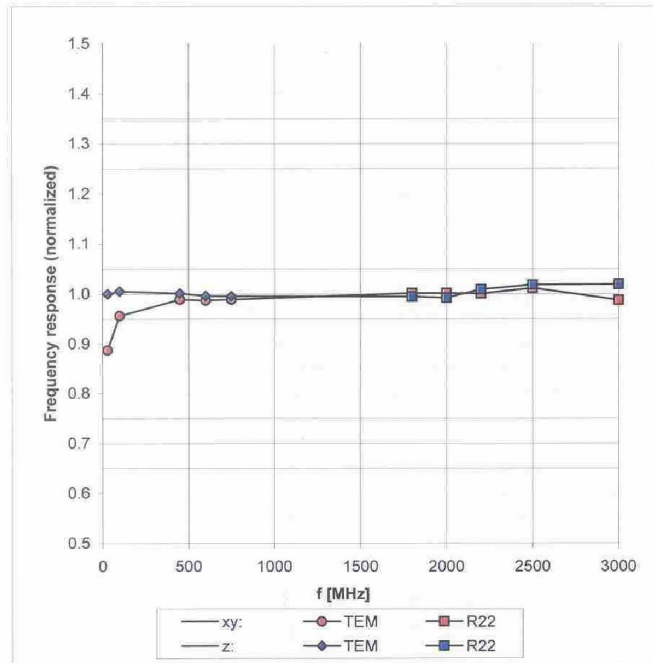

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)