



HAC RF TEST REPORT

No. 2012HAC00028-1

For

TCT Mobile Limited

CDMA2000 Triple bands mobile phone

Model Name: Aeneas Duralife

Marketing Name: ONE TOUCH 988

With

Hardware Version: V02

Software Version: vK30

FCCID: RAD284

Results Summary: M Category = M4

Issued Date: 2012-08-20



No. DGA-PL-114/01-02

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

TABLE OF CONTENT

1 TEST LABORATORY	3
1.1 TESTING LOCATION	3
1.2 TESTING ENVIRONMENT.....	3
1.3 PROJECT DATA	3
1.4 SIGNATURE.....	3
2 CLIENT INFORMATION	4
2.1 APPLICANT INFORMATION	4
2.2 MANUFACTURER INFORMATION	4
3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	4
3.1 ABOUT EUT	4
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	4
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	4
4 CONDUCTED OUTPUT POWER MEASUREMENT	5
4.1 SUMMARY	5
4.2 CONDUCTED POWER	5
5. REFERENCE DOCUMENTS.....	5
5.1REFERENCE DOCUMENTS FOR TESTING	5
6 OPERATIONAL CONDITIONS DURING TEST	5
6.1 HAC MEASUREMENT SET-UP.....	5
6.2 PROBE SPECIFICATION.....	6
6.3 TEST ARCH PHANTOM & PHONE POSITIONER.....	7
6.4 ROBOTIC SYSTEM SPECIFICATIONS	8
7 EUT ARRANGEMENT	8
7.1 WD RF EMISSION MEASUREMENTS REFERENCE AND PLANE	8
8 SYSTEM VALIDATION	9
8.1 VALIDATION PROCEDURE	9
8.2 VALIDATION RESULT	10
9 PROBE MODULATION FACTOR.....	10
9.1 MODULATION FACTOR TEST PROCEDURE.....	11
9.2 MODULATION FACTOR.....	12
10 RF TEST PROCEDURES	13
11 HAC RF TEST DATA SUMMARY.....	14
11.1 MEASUREMENT RESULTS (E-FIELD).....	14
11.2 MEASUREMENT RESULTS (H-FIELD)	15
11.3 TOTAL M-RATING	15
12 ANSI C 63.19-2007 LIMITS	16
13 MEASUREMENT UNCERTAINTY	17
14 MAIN TEST INSTRUMENTS.....	18
15 CONCLUSION	18
ANNEX A TEST LAYOUT.....	19
ANNEX B TEST PLOTS	20
ANNEX C SYSTEM VALIDATION RESULT	60
ANNEX D PROBE CALIBRATION CERTIFICATE.....	64

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China
Postal Code: 100191
Telephone: +86-10-62304633
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: 18°C~25 °C,

Relative humidity: 30%~ 70%

Ground system resistance: < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.

Reflection of surrounding objects is minimized and in compliance with requirement of standards.

1.3 Project Data

Project Leader: Qi Dianyuan

Test Engineer: Lin Hao

Testing Start Date: August 6, 2012


Testing End Date: August 6, 2012

1.4 Signature



Lin Hao

(Prepared this test report)

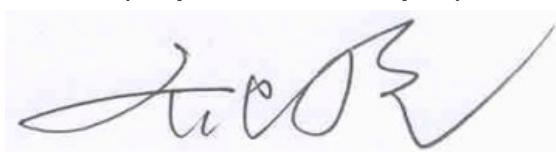

Qi Dianyuan

(Reviewed this test report)



Xiao Li

Deputy Director of the laboratory

(Approved this test report)

2 Client Information

2.1 Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Contact Person: Gong Zhizhou
Email: zhizhou.gong@jrdcom.com
Country: P. R. China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2 Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Contact Person: Gong Zhizhou
Email: zhizhou.gong@jrdcom.com
Country: P. R. China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1 About EUT

EUT Description: CDMA2000 Triple bands mobile phone
Model Name: Aeneas Duralife
Marking Name: ONE TOUCH 988
Frequency Band: CDMA 800/1700/1900

3.2 Internal Identification of EUT used during the test

EUT ID*	MEID	HW Version	SW Version
EUT1	a100000869c329 / a100000869c67a	V02	vK30

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test HAC with the EUT (a100000869c329) and conducted power with the EUT (a100000869c67a).

3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAB60BA000C1	/	SCUD
AE2	Battery	CAB60B0000C2	/	BAK

*AE ID: is used to identify the test sample in the lab internally

4 CONDUCTED OUTPUT POWER MEASUREMENT

4.1 Summary

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (CMU200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured output power should be greater and within 5% than EMI measurement.

4.2 Conducted Power

CDMA 800MHz	Conducted Power (dBm)		
	Channel 777(848.31MHz)	Channel 384(836.52MHz)	Channel 1013(824.7MHz)
	25.24	25.23	25.16
CDMA 1700MHz	Conducted Power (dBm)		
	Channel 875(1753.75MHz)	Channel 450(1732.5MHz)	Channel 25(1711.25MHz)
	23.30	23.22	23.19
CDMA 1900MHz	Conducted Power (dBm)		
	Channel 1175(1908.75MHz)	Channel 600(1880MHz)	Channel 25(1851.25MHz)
	23.06	23.07	23.07

5. Reference Documents

5.1 Reference Documents for testing

The following document listed in this section is referred for testing.

Reference	Title	Version
ANSI C63.19-2007	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids	2007 Edition

6 OPERATIONAL CONDITIONS DURING TEST

6.1 HAC MEASUREMENT SET-UP

These measurements are performed using the DASY5 NEO automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Intel Core2 1.86 GHz computer with Windows XP system and HAC Measurement Software DASY5 NEO, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements,

mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

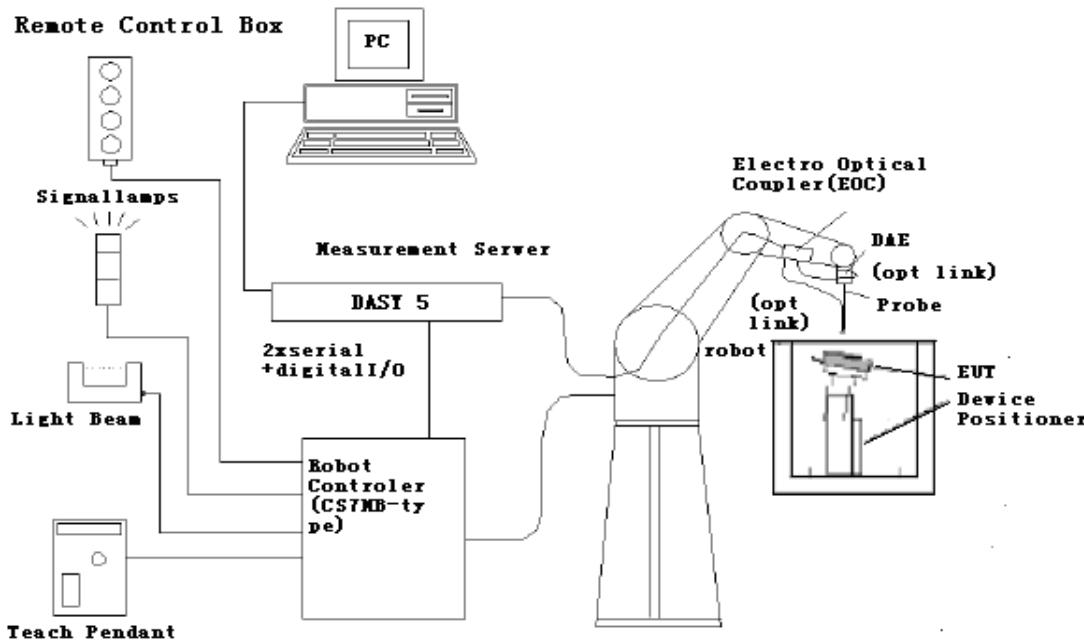



Fig. 1 HAC Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

6.2 Probe Specification

6.2.1 E-Field Probe Description

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material
--------------	---



[ER3DV6]

Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, k=2)
-------------	--

Frequency	40 MHz to > 6 GHz (can be extended to < 20 MHz) Linearity: ± 0.2 dB (100 MHz to 3 GHz)
-----------	---

Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
-------------	---

Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
---------------	--

Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm
Application	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms

6.2.2 H-Field Probe Description

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
--------------	---

**[H3DV6]**

Frequency	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$, k=2); Output linearized
-----------	---

Directivity	± 0.2 dB (spherical isotropy error)
-------------	---

Dynamic Range	10 mA/m to 2 A/m at 1 GHz
---------------	---------------------------

E-Field Interference	< 10% at 3 GHz (for plane wave)
----------------------	---------------------------------

Dimensions	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm
------------	--

Application	General magnetic near-field measurements up to 3 GHz (in air or liquids) Field component measurements Surface current measurements Low interaction with the measured field
-------------	---

6.3 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field $<\pm 0.5$ dB.

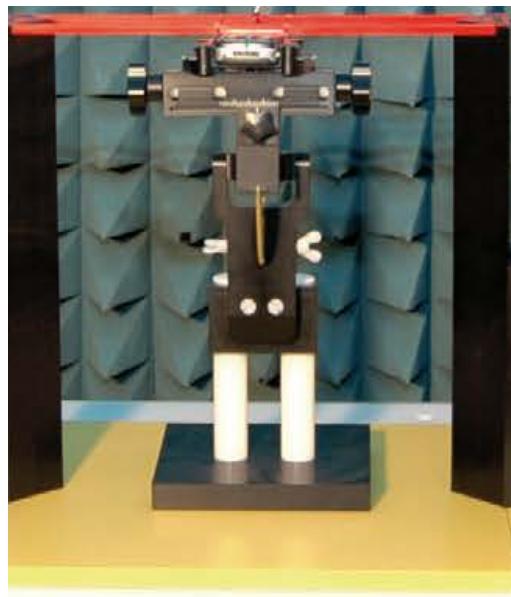


Fig. 2 HAC Phantom & Device Holder

6.4 Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX160L

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Intel Core2

Clock Speed: 1.86 GHz

Operating System: Windows XP

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY5 software

Connecting Lines: Optical downlink for data and status info.

Optical uplink for commands and clock

7 EUT ARRANGEMENT

7.1 WD RF Emission Measurements Reference and Plane

Figure 4 illustrates the references and reference plane that shall be used in the WD emissions measurement.

- The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the WD (speaker or T-coil).
- The grid is located by reference to a reference plane. This reference plane is the planar area that contains the highest point in the area of the WD that normally rests against the user's ear
- The measurement plane is located parallel to the reference plane and 10 mm from it, out from

the phone. The grid is located in the measurement plane.

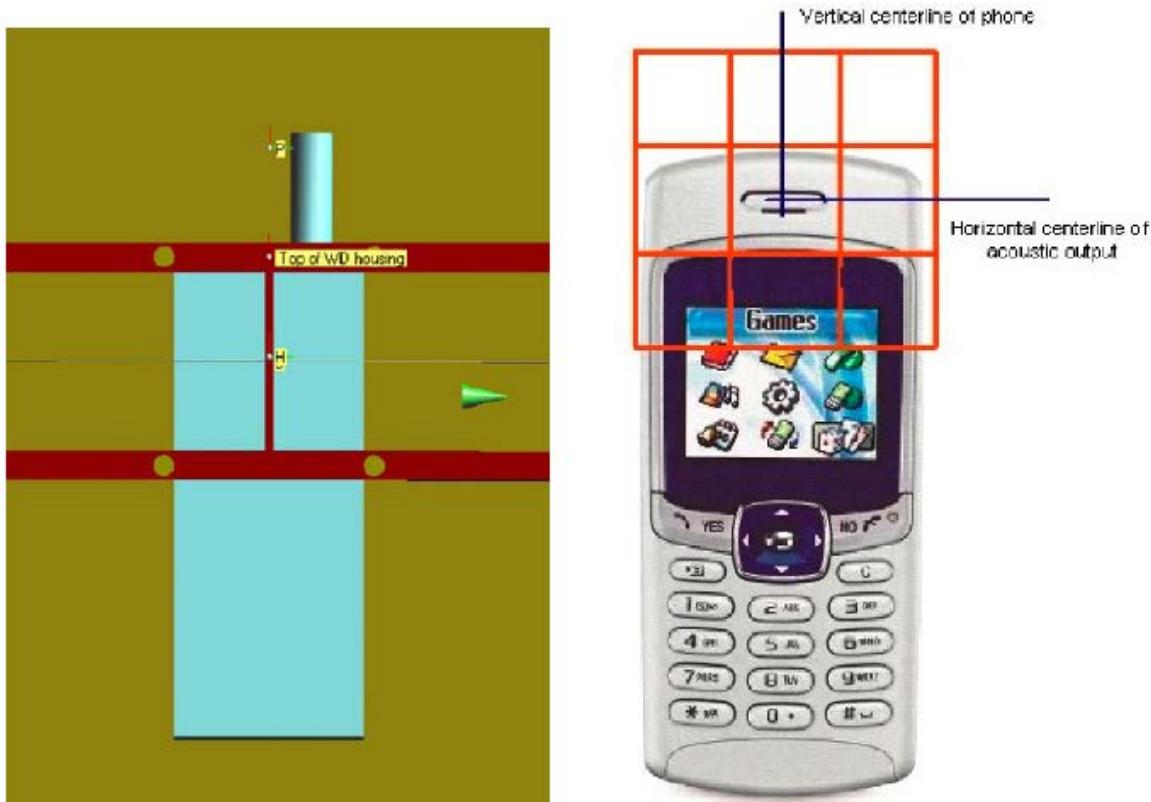



Fig. 3 WD reference and plane for RF emission measurements

8 SYSTEM VALIDATION

8.1 Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI C63.19 D.5 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field and H-field probes so that:

- The probes and their cables are parallel to the coaxial feed of the dipole antenna
- The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions
- The center point of the probe element(s) are 10 mm from the closest surface of the dipole elements.

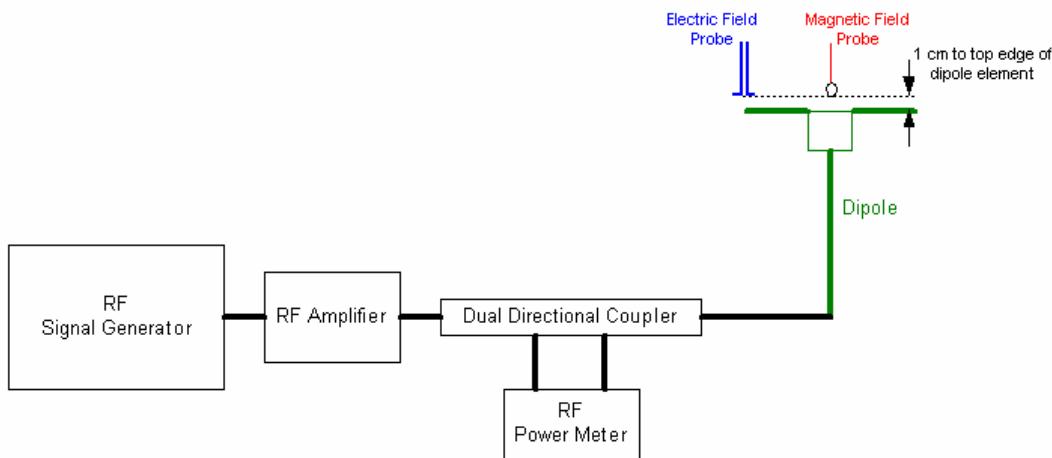
Fig. 4 Dipole Validation Setup

8.2 Validation Result

E-Field Scan							
Mode	Frequency (MHz)	Input Power (mW)	Measured ¹ Value(V/m)	Target ² Value(V/m)	Deviation ³ (%)	Limit ⁴ (%)	
CW	800	100	162.6	160.7	1.18	± 25	
CW	1900	100	143.9	141.5	1.70	± 25	
H-Field Scan							
Mode	Frequency (MHz)	Input Power (mW)	Measured Value(A/m)	Target Value(A/m)	Deviation (%)	Limit (%)	
CW	800	100	0.464	0.456	1.75	± 25	
CW	1900	100	0.461	0.473	-2.54	± 25	

Notes:

1. Please refer to the attachment for detailed measurement data and plot.
2. Target value is provided by SPEAD in the calibration certificate of specific dipoles.
3. Deviation (%) = $100 * (\text{Measured value} - \text{Target value}) / \text{Target value}$
4. ANSI C63.19 requires values within $\pm 25\%$ are acceptable, of which 12% is deviation and 13% is measurement uncertainty. Values independently validated for the dipole actually used in the measurements should be used, when available.

9 Probe Modulation Factor

The Probe Modulation Factor (PMF) is defined as the ratio of the field readings for a CW and a modulated signal with the equivalent Field Envelope Peak as defined in ANSI C63.19 (Chapter C.3.1). Calibration shall be made of the modulation response of the probe and its instrumentation chain. This Calibration shall be performed with the field probe, attached to the instrumentation that is to be used with it during the measurement. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. The field level of the test signals shall be more than 10dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated field shall be applied to the readings taken of modulated fields of the specified type.

9.1 Modulation Factor Test Procedure

This may be done using the following procedure:

1. Fix the field probe in a set location relative to a field generating device, such as the reference dipole antenna, as illustrated in the following figure.
2. Illuminate the probe using the wireless device (EUT) connected to the reference dipole with a test signal at the intended measurement frequency. Ensure there is sufficient field coupling between the probe and the antenna so the resulting reading is greater than 10 dB above the probe system noise floor but within the systems operating range.

Note:

- The EUT shall be placed on a Service Option 3 call using Radio Configuration 1. The EUT audio shall be muted such that the RF gating is guaranteed to be 1/8th rate.

- The EUT shall be placed on a Service Option 2 or Service Option 55 call using Radio Configuration 1. The data rate shall be set to "Full".

- The test shall be run in Cell Band and PCS Band at low, mid, and high channels. Cell Band test channels shall be 1013, 384, and 777. PCS Band test channels shall be 25, 600, and 1175.

3. Record the amplitude applied to the antenna during transmission and the field strength measured by the E-field probe located near the tip of the dipole antenna
4. Replace the wireless device with an RF signal generator producing an unmodulated CW signal and set to the wireless device operating frequency.
5. Set the amplitude of the unmodulated signal to equal that recorded from the wireless device.
6. Record the reading of the probe measurement system of the unmodulated signal.
7. The ratio, in linear units, of the probe reading in Step 6) to the reading in Step 3) is the E-field modulation factor. $PMF_E = E_{CW} / E_{mod}$ ($PMF_H = H_{CW} / H_{mod}$)
8. Repeat the previous steps using the H-field probe, except locate the probe at the center of the dipole.

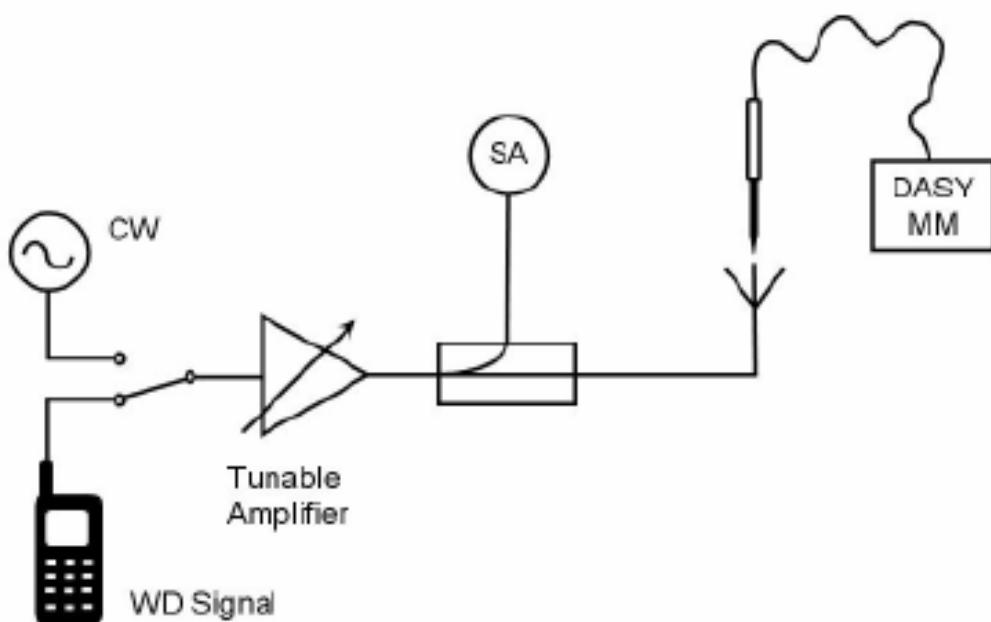


Fig. 6 Probe Modulation Factor Test Setup

9.2 Modulation Factor

9.2.1 E-Field

Mode	Frequency (MHz)	E-Field Measured Value (V/m)	Probe Modulation Factor
CW	848.31	269	0.947
CDMA(SO55)		284	
CW	836.52	244	0.907
CDMA(SO55)		269	
CW	824.7	237	0.956
CDMA(SO55)		248	
CW	848.31	34.52	2.898
CDMA(SO3)		11.91	
CW	836.52	34.26	2.911
CDMA(SO3)		11.77	
CW	824.7	34.69	2.935
CDMA(SO3)		11.82	
CW	1908.75	177	0.952
CDMA(SO55)		186	
CW	1880	175	0.931
CDMA(SO55)		188	
CW	1851.25	169	0.939
CDMA(SO55)		180	
CW	1908.75	43.45	2.930
CDMA(SO3)		14.83	
CW	1880	41.68	2.880
CDMA(SO3)		14.47	
CW	1851.25	41.76	2.906
CDMA(SO3)		14.37	
CW	1700	141.2	1.00
CDMA		141.0	

9.2.2 H-Field

Mode	Frequency (MHz)	H-Field Measured Value (A/m)	Probe Modulation Factor
CW	848.31	0.591	0.904
CDMA(SO55)		0.654	
CW	836.52	0.574	0.900
CDMA(SO55)		0.638	
CW	824.7	0.568	0.906
CDMA(SO55)		0.627	
CW	848.31	0.308	2.826
CDMA(SO3)		0.109	
CW	836.52	0.298	2.785

CDMA(SO3)		0.107	
CW	824.7	0.304	2.598
CDMA(SO3)		0.117	
CW	1908.75	0.479	0.914
CDMA(SO55)		0.524	
CW	1880	0.489	0.935
CDMA(SO55)		0.523	
CW	1851.25	0.477	0.928
CDMA(SO55)		0.514	
CW	1908.75	0.266	2.687
CDMA(SO3)		0.099	
CW	1880	0.251	2.820
CDMA(SO3)		0.089	
CW	1851.25	0.243	2.793
CDMA(SO3)		0.087	
CW	1700	0.470	1.00
CDMA		0.469	

10 RF TEST PROCEDURES

The evaluation was performed with the following procedure:

- 1) Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
- 2) Position the WD in its intended test position. The gauge block can simplify this positioning. Note that a separate E-field and H-field gauge block will be needed if the center of the probe sensor elements are at different distances from the tip of the probe.
- 3) Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters (e.g., test mode), as intended for the test.
- 4) The center sub-grid shall centered on the center of the T-Coil mode axial measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane. If the field alignment method is used, align the probe for maximum field reception.
- 5) Record the reading.
- 6) Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- 7) Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum field strength readings. Thus the six areas to be used to determine the WD's highest emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E-field and H-field measurements for the WD output being measured. Stated another way, the center sub-grid and three others must be common to both the E-field and H-field measurements.
- 8) Identify the maximum field reading within the non-excluded sub-grids identified in Step 7)
- 9) Convert the maximum field strength reading identified in Step 8) to V/m or A/m, as appropriate.

For probes which require a probe modulation factor, this conversion shall be done using the appropriate probe modulation factor and the calibration.

10) Repeat Step 1) through Step 10) for both the E-field and H-field measurements.

11) Compare this reading to the categories in ANSI C63.19 Clause 7 and record the resulting category. The lowest category number listed in 7.2, Table 7.4, or Table 7.5 obtained in Step 10) for either E- or H-field determines the M category for the audio coupling mode assessment. Record the WD category rating.

11 HAC RF TEST DATA SUMMARY

11.1 Measurement Results (E-Field)

Frequency		AWF	Measured Value (V/m)	Power Drift (dB)	Category
MHz	Channel				
CDMA 1700					
1753.75	875	0	44.1	0.00992	M4 (see Fig B.1)
1732.5	450	0	52.1	-0.016	M4 (see Fig B.2)
1711.25	25	0	49.2	-0.019	M4 (see Fig B.3)

CDMA Mode: SO55

Frequency		AWF	Measured Value (V/m)	Power Drift (dB)	Category
MHz	Channel				
CDMA 800					
848.31	777	0	75.2	-0.043	M4 (see Fig B.4)
836.52	384	0	66.3	0.0069	M4 (see Fig B.5)
824.7	1013	0	62.8	-0.089	M4 (see Fig B.6)
CDMA 1900					
1908.75	1175	0	32.8	-0.025	M4 (see Fig B.7)
1880	600	0	31.2	-0.039	M4 (see Fig B.8)
1851.25	25	0	36.7	0.013	M4 (see Fig B.9)

CDMA Mode: SO3

Frequency		AWF	Measured Value (V/m)	Power Drift (dB)	Category
MHz	Channel				
CDMA 800					
848.31	777	0	80.5	0.127	M4 (see Fig B.10)
836.52	384	0	74.3	-0.057	M4 (see Fig B.11)
824.7	1013	0	69	0.056	M4 (see Fig B.12)
CDMA 1900					
1908.75	1175	0	43.9	-0.044	M4 (see Fig B.13)
1880	600	0	35.3	-0.019	M4 (see Fig B.14)
1851.25	25	0	42	0.090	M4 (see Fig B.15)

11.2 Measurement Results (H-Field)

Frequency		AWF	Measured Value (A/m)	Power Drift (dB)	Category
MHz	Channel				
CDMA 1700					
1753.75	875	0	0.111	0.00144	M4 (see Fig B.16)
1732.5	450	0	0.135	0.000744	M4 (see Fig B.17)
1711.25	25	0	0.127	0.025	M4 (see Fig B.18)

CDMA Mode: SO55

Frequency		AWF	Measured Value (A/m)	Power Drift (dB)	Category
MHz	Channel				
CDMA 800					
848.31	777	0	0.114	-0.127	M4 (see Fig B.19)
836.52	384	0	0.115	-0.133	M4 (see Fig B.20)
824.7	1013	0	0.120	-0.056	M4 (see Fig B.21)
CDMA 1900					
1908.75	1175	0	0.093	0.123	M4 (see Fig B.22)
1880	600	0	0.092	-0.024	M4 (see Fig B.23)
1851.25	25	0	0.104	-0.029	M4 (see Fig B.24)

CDMA Mode: SO3

Frequency		AWF	Measured Value (A/m)	Power Drift (dB)	Category
MHz	Channel				
CDMA 800					
848.31	777	0	0.161	0.054	M4 (see Fig B.25)
836.52	384	0	0.131	-0.141	M4 (see Fig B.26)
824.7	1013	0	0.136	0.188	M4 (see Fig B.27)
CDMA 1900					
1908.75	1175	0	0.112	-0.147	M4 (see Fig B.28)
1880	600	0	0.108	0.024	M4 (see Fig B.29)
1851.25	25	0	0.129	-0.00376	M4 (see Fig B.30)

11.3 Total M-rating

Mode	Maximum value of peak Total E-Field (V/m)	Maximum value of peak Total H-Field (A/m)	E-Field M Rating	H-Field M Rating	Total M Rating
CDMA 1700	52.3	0.135	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.31)

CDMA Mode: SO55

Mode	Maximum value of peak Total E-Field (V/m)	Maximum value of peak Total H-Field (A/m)	E-Field M Rating	H-Field M Rating	Total M Rating
CDMA 800	75.2	0.120	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.32)

CDMA 1900	36.7	0.104	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.33)
--------------	------	-------	------------------	------------------	---------------------

CDMA Mode: SO3

Mode	Maximum value of peak Total E-Field (V/m)	Maximum value of peak Total H-Field (A/m)	E-Field M Rating	H-Field M Rating	Total M Rating
CDMA 800	80.5	0.161	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.34)
CDMA 1900	43.9	0.129	M4 (AWF 0 dB)	M4 (AWF 0 dB)	M4(see Fig B.35)

12 ANSI C 63.19-2007 LIMITS**Table 1: Telephone near-field categories in linear units**

Category		Telephone RF parameters < 960 MHz			
Near field	AWF	E-field emissions		H-field emissions	
Category M1/T1	0	631.0 to 1122.0	V/m	1.91 to 3.39	A/m
	-5	473.2 to 841.4	V/m	1.43 to 2.54	A/m
Category M2/T2	0	354.8 to 631.0	V/m	1.07 to 1.91	A/m
	-5	266.1 to 473.2	V/m	0.80 to 1.43	A/m
Category M3/T3	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M4/T4	0	< 199.5	V/m	< 0.60	A/m
	-5	< 149.6	V/m	< 0.45	A/m
Category		Telephone RF parameters > 960 MHz			
Near field	AWF	E-field emissions		H-field emissions	
Category M1/T1	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M2/T2	0	112.2 to 199.5	V/m	0.34 to 0.60	A/m
	-5	84.1 to 149.6	V/m	0.25 to 0.45	A/m
Category M3/T3	0	63.1 to 112.2	V/m	0.19 to 0.34	A/m
	-5	47.3 to 84.1	V/m	0.14 to 0.25	A/m
Category M4/T4	0	< 63.1	V/m	< 0.19	A/m
	-5	< 47.3	V/m	< 0.14	A/m

13 MEASUREMENT UNCERTAINTY

No.	Error source	Type	Uncertainty Value (%)	Prob. Dist.	k	c_i	$c_i \sqrt{H}$	Standard Uncertainty (%) u_i (%)	Standard Uncertainty (%) u_i (%)	Degree of freedom V_{eff} or v_i
1	System repeatability	A	0.24	N	1	1	1	0.24	0.24	9
Measurement System										
2	— Probe Calibration	B	3	N	1	1	1	5.1	5.1	∞
3	— Axial Isotropy	B	3.5	R	$\sqrt{3}$	1	1	2.7	2.7	∞
4	— Sensor Displacement	B	16.5	R	$\sqrt{3}$	1	0.145	9.5	1.4	∞
5	— Boundary Effects	B	2.4	R	$\sqrt{3}$	1	1	1.4	1.4	∞
6	— Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
7	— Scaling to Peak Envelope Power	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
8	— System Detection Limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
9	— Readout Electronics	B	0.3	N	1	1	1	0.3	0.3	∞
10	- Response Time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
11	— Integration Time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
12	— RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	— RF Reflections	B	12.0	R	$\sqrt{3}$	1	1	6.9	6.9	∞
14	— Probe Positioner	A	1.2	R	$\sqrt{3}$	1	0.67	0.7	0.5	∞
15	— Probe Positioning	A	4.7	R	$\sqrt{3}$	1	0.67	2.7	1.8	∞
16	— Extra. And Interpolation	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test Sample Related										
17	— Device Positioning Vertical	B	4.7	R	$\sqrt{3}$	1	0.67	2.7	1.8	∞

18	— Device Positioning Lateral	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
19	— Device Holder and Phantom	B	2.4	R	$\sqrt{3}$	1	1	1.4	1.4	∞
20	— Power Drift	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and Setup related										
21	— Phantom Thickness	B	2.4	R	$\sqrt{3}$	1	0.67	1.4	0.9	∞
PMF										
22	— monitoring amplitude ratio	B	2.8	R	$\sqrt{3}$	1	1	1.6	1.6	∞
23	— setup repeatability	A	2.7	N	1	1	1	2.7	2.7	9
24	— sensor amplitude	B	11.6	R	$\sqrt{3}$	1	0.569	6.7	3.8	∞
Combined standard uncertainty (%)	$u_c = \sqrt{\sum_{i=1}^{24} c_i^2 u_i^2}$						16.4	11.5		
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$	N	k=2			32.8	23.0			

14 MAIN TEST INSTRUMENTS

Table 2: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	E-Field Probe	ER3DV6	2303	February 21, 2012	One year
02	H-Field Probe	H3DV6	6138	February 21, 2012	One year
03	HAC Dipole	CD835V3	1133	February 21, 2012	Two years
04	HAC Dipole	CD1880V3	1115	February 21, 2012	Two years
05	BTS	E5515C	MY48365192	November 17, 2011	One year
06	DAE	SPEAG DAE4	777	July 8, 2012	One year

15 CONCLUSION

The HAC measurement indicates that the EUT complies with the HAC limits of the ANSI C63.19-2007 and CTIA Standard. **The total M-rating is M4 for CDMA 800/1700/1900 band.**

END OF REPORT BODY

ANNEX A TEST LAYOUT

Picture A1: HAC RF System Layout

ANNEX B TEST PLOTS

HAC RF E-Field CDMA 1700 High

Date: 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1700; Frequency: 1753.75 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 44.1 V/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.5 V/m; Power Drift = 0.00992 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
34.8 M4	31.5 M4	32.6 M4
Grid 4	Grid 5	Grid 6
27.3 M4	44.1 M4	44.5 M4

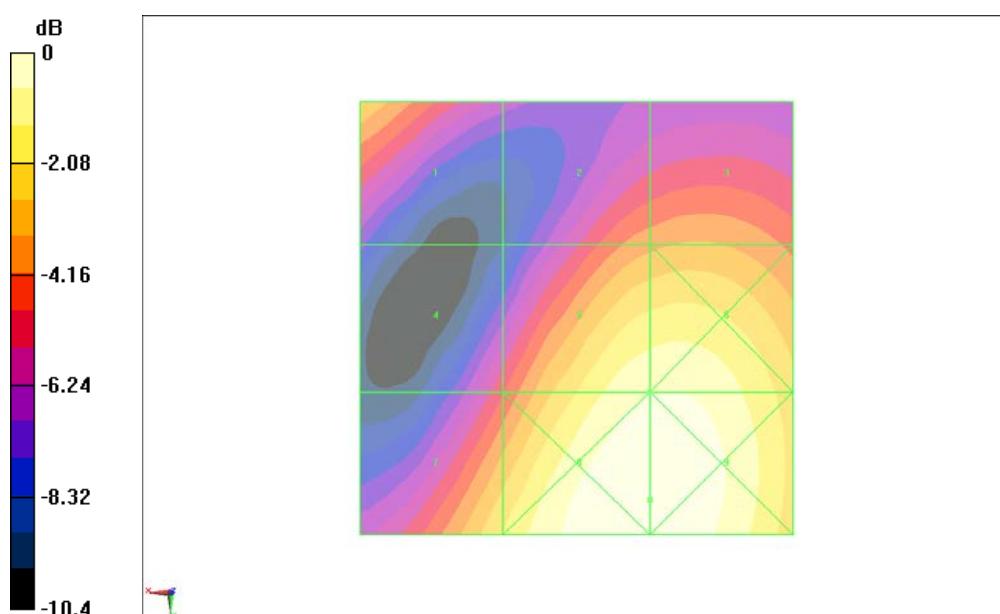


Fig B.1 HAC RF E-Field CDMA 1700 High

HAC RF E-Field CDMA 1700 Middle**Date:** 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1700; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 52.1 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 49.9 V/m; Power Drift = -0.016 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 38.9 M4	Grid 2 38 M4	Grid 3 38.9 M4
Grid 4 33.8 M4	Grid 5 52.1 M4	Grid 6 52.3 M4
Grid 7 45.8 M4	Grid 8 56.4 M4	Grid 9 56.3 M4

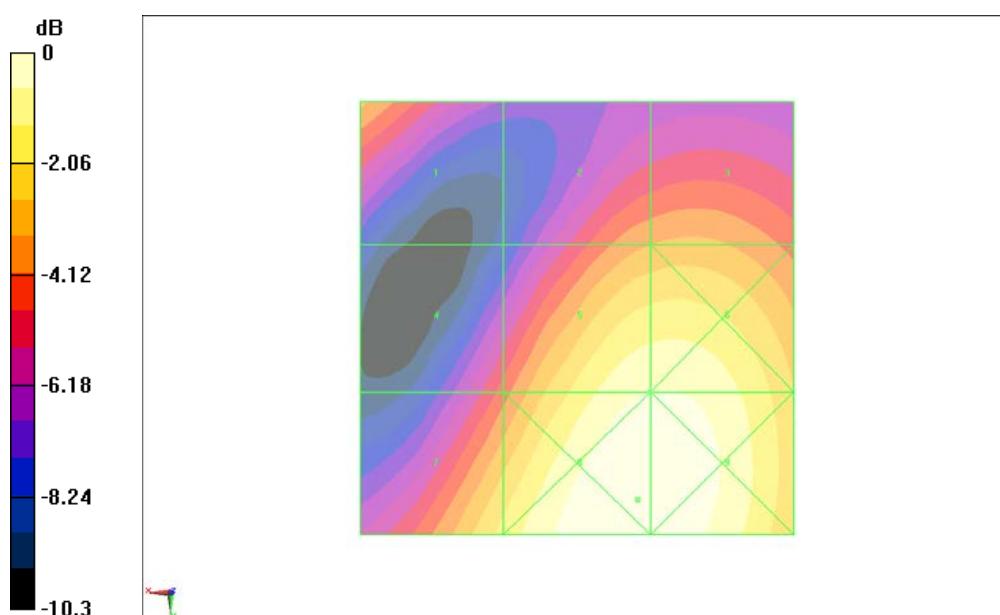

0 dB = 56.4V/m

Fig B.2 HAC RF E-Field CDMA 1700 Middle

HAC RF E-Field CDMA 1700 Low**Date:** 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1700; Frequency: 1711.25 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 m m from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 49.2 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 47.7 V/m; Power Drift = -0.019 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
35.2 M4	36.4 M4	37.3 M4
Grid 4	Grid 5	Grid 6
33.1 M4	49.2 M4	49.3 M4
Grid 7	Grid 8	Grid 9
44.8 M4	53 M4	52.8 M4

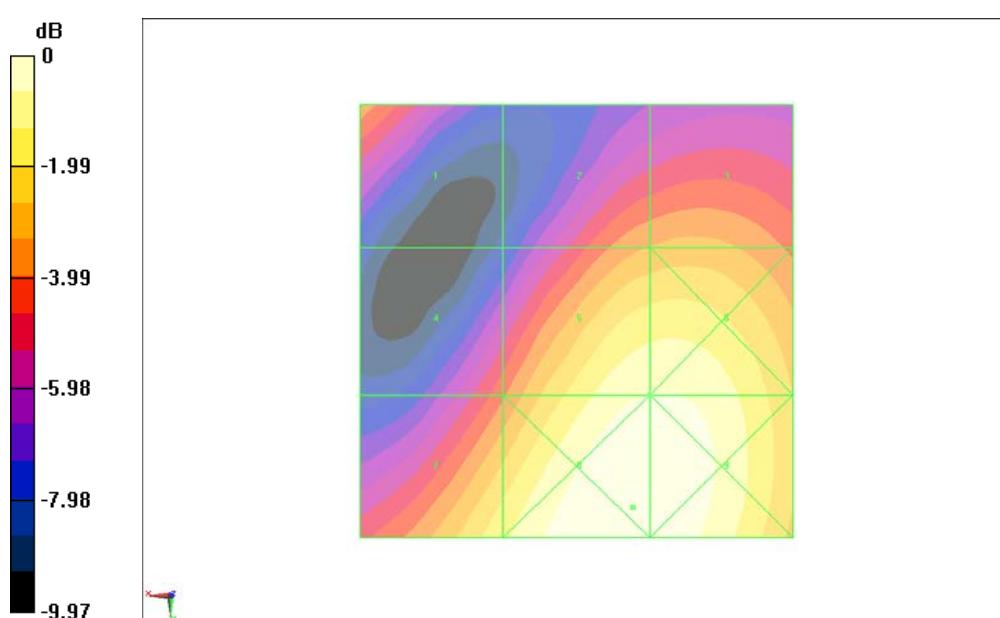**Fig B.3 HAC RF E-Field CDMA 1700 Low**

HAC RF E-Field CDMA 800 High – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 75.2 V/m

Probe Modulation Factor = 0.947


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 102.3 V/m; Power Drift = -0.043 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
64.1 M4	71.4 M4	69.9 M4
Grid 4	Grid 5	Grid 6
68.9 M4	75.2 M4	73.7 M4
Grid 7	Grid 8	Grid 9
72.5 M4	75.2 M4	73.5 M4

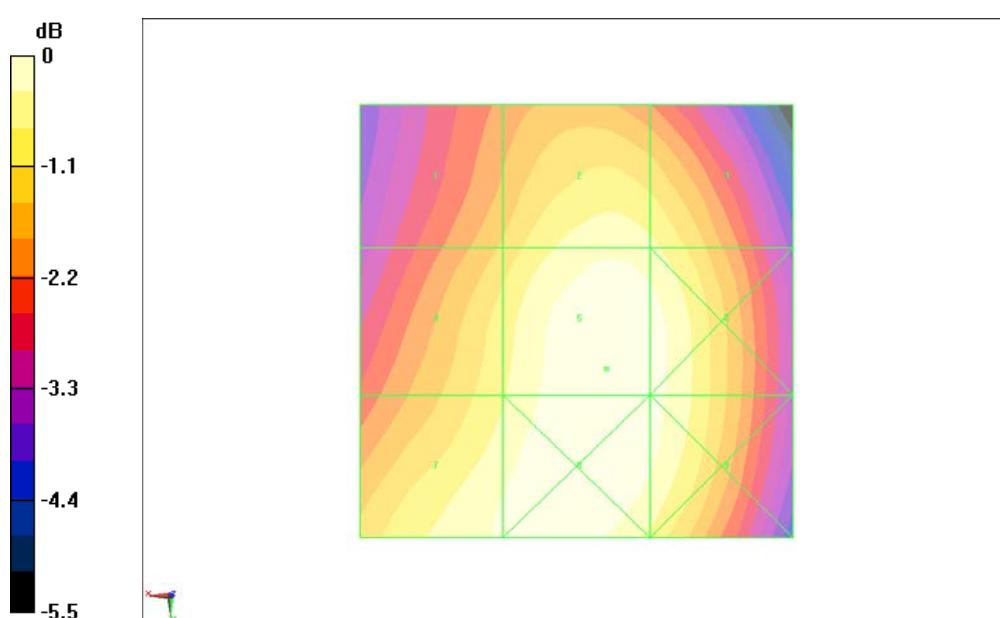

0 dB = 75.2V/m

Fig B.4 HAC RF E-Field CDMA 800 High

HAC RF E-Field CDMA 800 Middle – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 66.3 V/m

Probe Modulation Factor = 0.907


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 93.9 V/m; Power Drift = 0.0069 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
57.4 M4	63.5 M4	62.5 M4
Grid 4	Grid 5	Grid 6
61.2 M4	66.3 M4	65 M4
Grid 7	Grid 8	Grid 9
64.1 M4	66.2 M4	64.7 M4

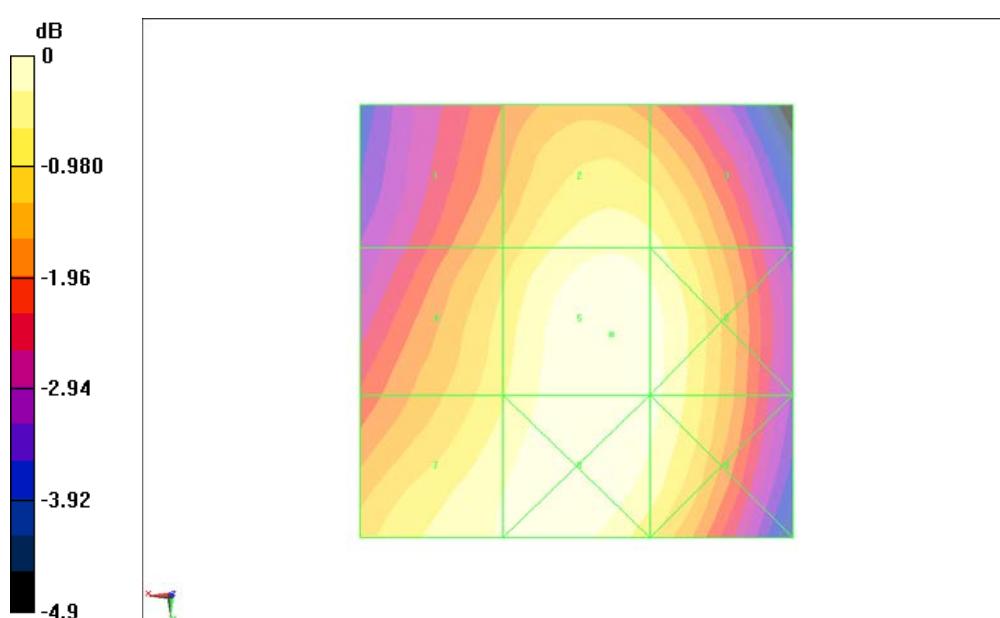

0 dB = 66.3V/m

Fig B.5 HAC RF E-Field CDMA 800 Middle

HAC RF E-Field CDMA 800 Low – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 62.8 V/m

Probe Modulation Factor = 0.956


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 83.7 V/m; Power Drift = -0.089 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
54.6 M4	61.4 M4	61.1 M4
Grid 4	Grid 5	Grid 6
56.3 M4	62.8 M4	62.2 M4
Grid 7	Grid 8	Grid 9
58.4 M4	61.9 M4	61 M4

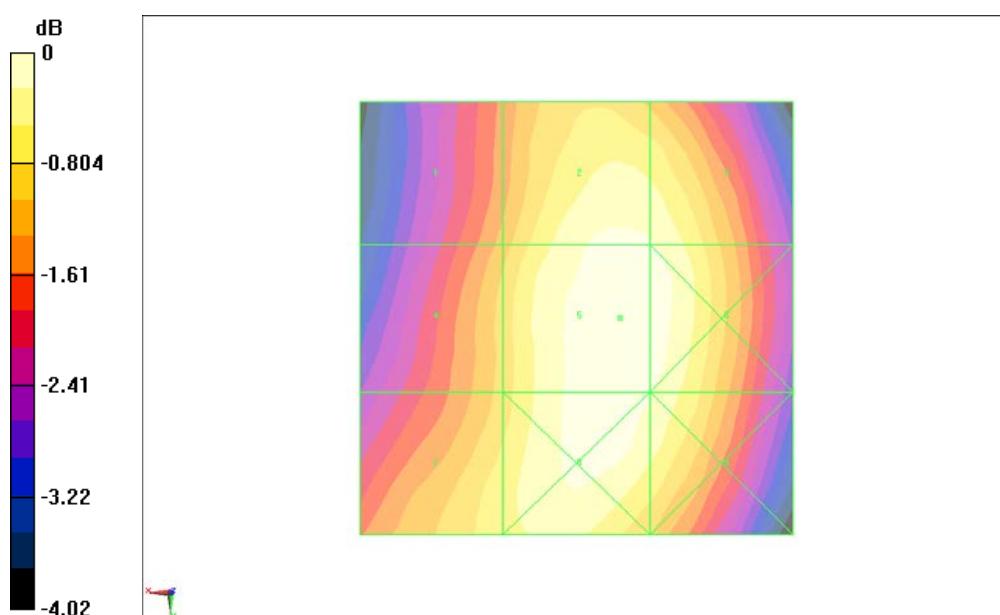

0 dB = 62.8V/m

Fig B.6 HAC RF E-Field CDMA 800 Low

HAC RF E-Field CDMA 1900 High – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 32.8 V/m

Probe Modulation Factor = 0.952


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28 V/m; Power Drift = -0.025 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
32.8 M4	27.6 M4	25.4 M4
Grid 4	Grid 5	Grid 6
20.3 M4	32.6 M4	33.4 M4
Grid 7	Grid 8	Grid 9
26.7 M4	37.3 M4	37.3 M4

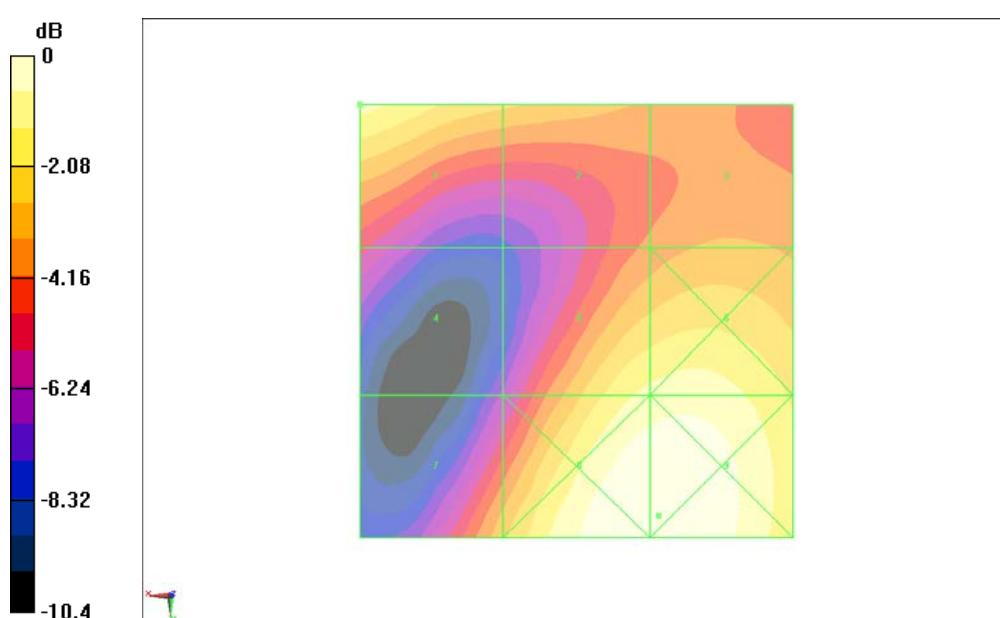

0 dB = 37.3V/m

Fig B.7 HAC RF E-Field CDMA 1900 High

HAC RF E-Field CDMA 1900 Middle – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 31.2 V/m

Probe Modulation Factor = 0.931


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.2 V/m; Power Drift = -0.039 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
30.9 M4	25.2 M4	23.9 M4
Grid 4	Grid 5	Grid 6
18.9 M4	31.2 M4	31.9 M4
Grid 7	Grid 8	Grid 9
26.7 M4	35.7 M4	35.7 M4

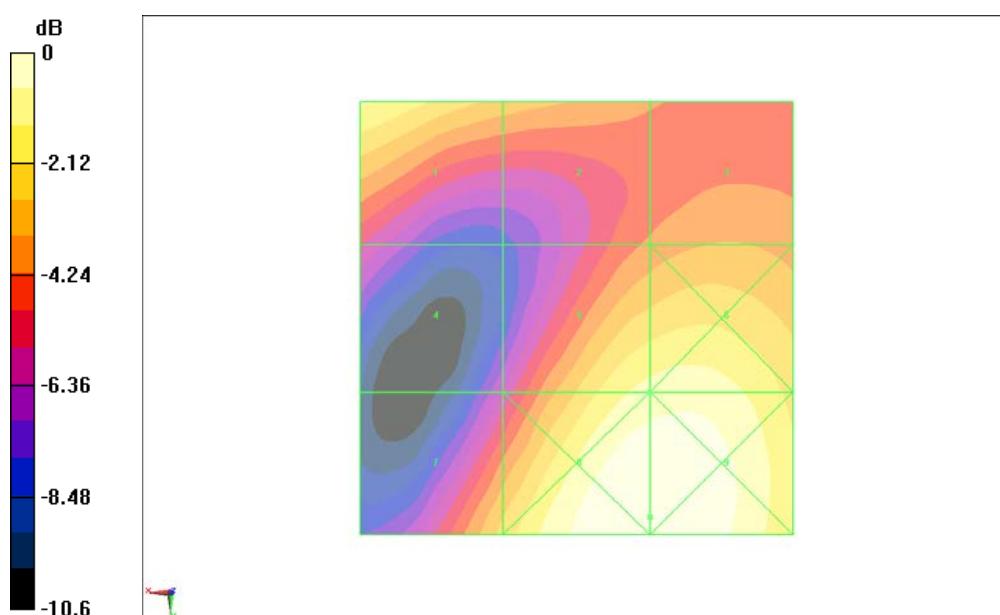**Fig B.8 HAC RF E-Field CDMA 1900 Middle**

HAC RF E-Field CDMA 1900 Low – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 36.7 V/m

Probe Modulation Factor = 0.939


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.2 V/m; Power Drift = 0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
35.7 M4	28.4 M4	27.8 M4
Grid 4	Grid 5	Grid 6
21.5 M4	36.7 M4	37.3 M4
Grid 7	Grid 8	Grid 9
32.2 M4	41.7 M4	41.7 M4

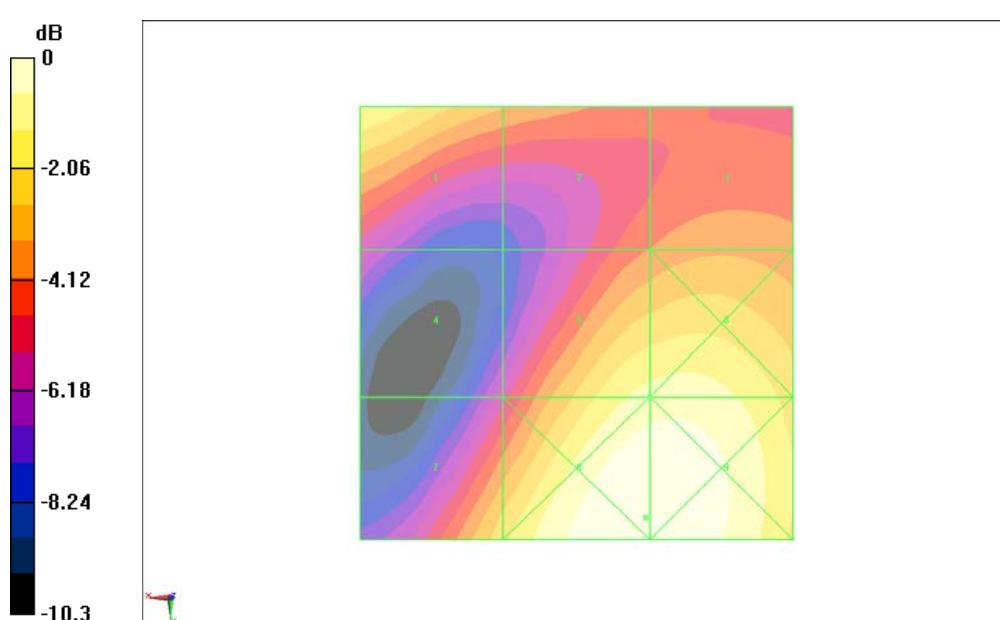**Fig B.9 HAC RF E-Field CDMA 1900 Low**

HAC RF E-Field CDMA 800 High – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 80.5 V/m

Probe Modulation Factor = 2.9


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.8 V/m; Power Drift = 0.127 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
67 M4	85.6 M4	75.3 M4
72 M4	80.2 M4	78.9 M4
76 M4	80.5 M4	78.7 M4

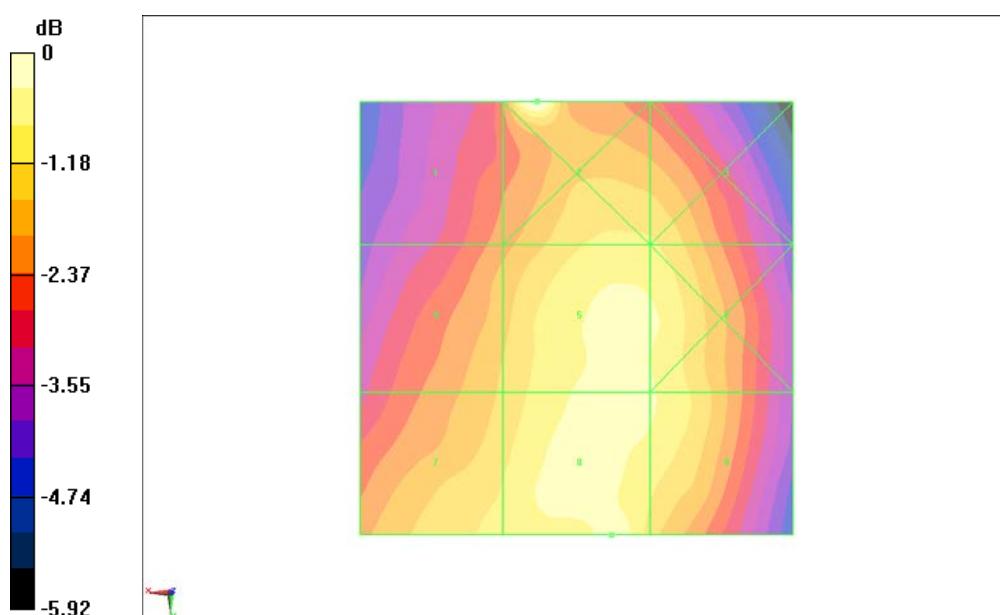

0 dB = 85.6V/m

Fig B.10 HAC RF E-Field CDMA 800 High

HAC RF E-Field CDMA 800 Middle – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 74.3 V/m

Probe Modulation Factor = 2.91


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.8 V/m; Power Drift = -0.057 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 63 M4	Grid 2 71 M4	Grid 3 70.4 M4
Grid 4 68.2 M4	Grid 5 74.3 M4	Grid 6 73.2 M4
Grid 7 72.7 M4	Grid 8 74.8 M4	Grid 9 73.1 M4

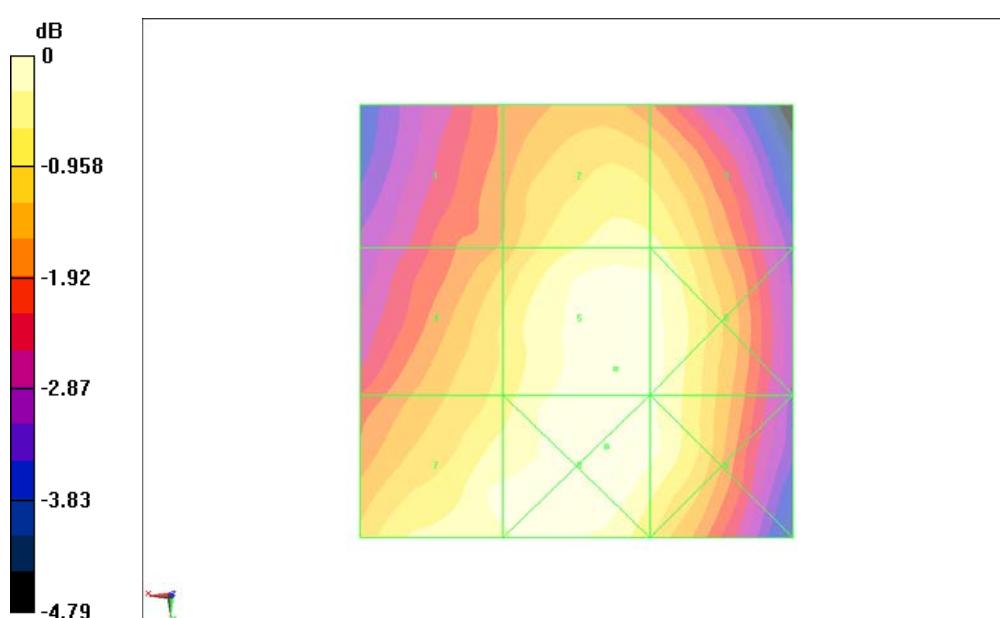

0 dB = 74.8V/m

Fig B.11 HAC RF E-Field CDMA 800 Middle

HAC RF E-Field CDMA 800 Low – SO3**Date:** 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 69 V/m

Probe Modulation Factor = 2.94

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 28.7 V/m; Power Drift = 0.056 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
59.3 M4	67.4 M4	67.1 M4
Grid 4	Grid 5	Grid 6
61.1 M4	69 M4	93.4 M4

Grid 7	Grid 8	Grid 9
63.2 M4	67.9 M4	107.6 M4

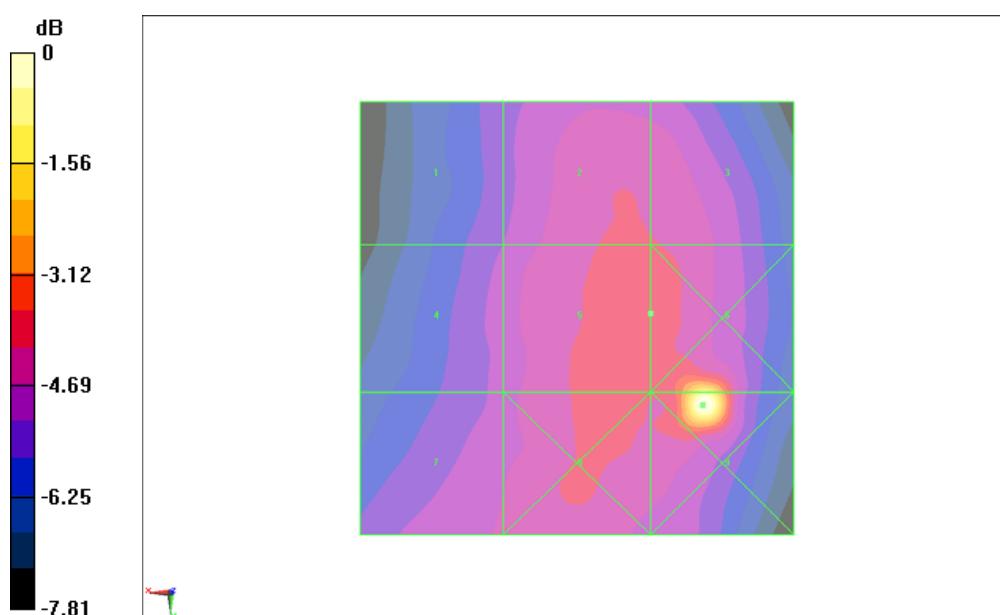

0 dB = 107.6V/m

Fig B.12 HAC RF E-Field CDMA 800 Low

HAC RF E-Field CDMA 1900 High – SO3**Date:** 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 43.9 V/m

Probe Modulation Factor = 2.93


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.4 V/m; Power Drift = -0.044 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
37.9 M4	31.9 M4	34.6 M4
Grid 4	Grid 5	Grid 6
23.7 M4	43.9 M4	52.2 M4
Grid 7	Grid 8	Grid 9
31 M4	43.4 M4	43.2 M4

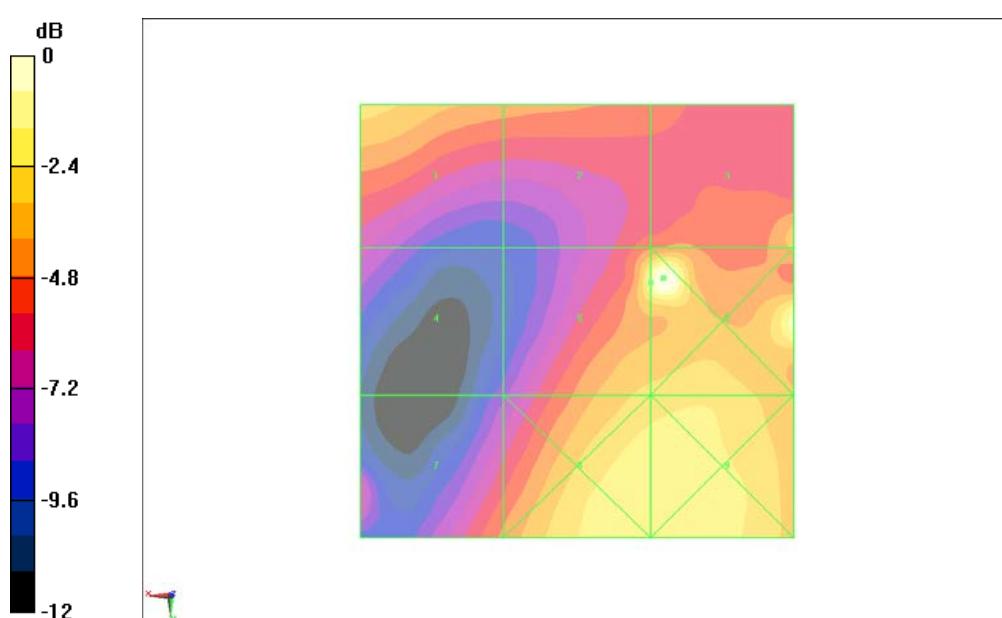

0 dB = 52.2V/m

Fig B.13 HAC RF E-Field CDMA 1900 High

HAC RF E-Field CDMA 1900 Middle – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 35.3 V/m

Probe Modulation Factor = 2.88


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.2 V/m; Power Drift = -0.019 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
35.2 M4	28.8 M4	27.1 M4
Grid 4	Grid 5	Grid 6
21.7 M4	35.3 M4	54 M4
Grid 7	Grid 8	Grid 9
30.2 M4	40.6 M4	40.6 M4

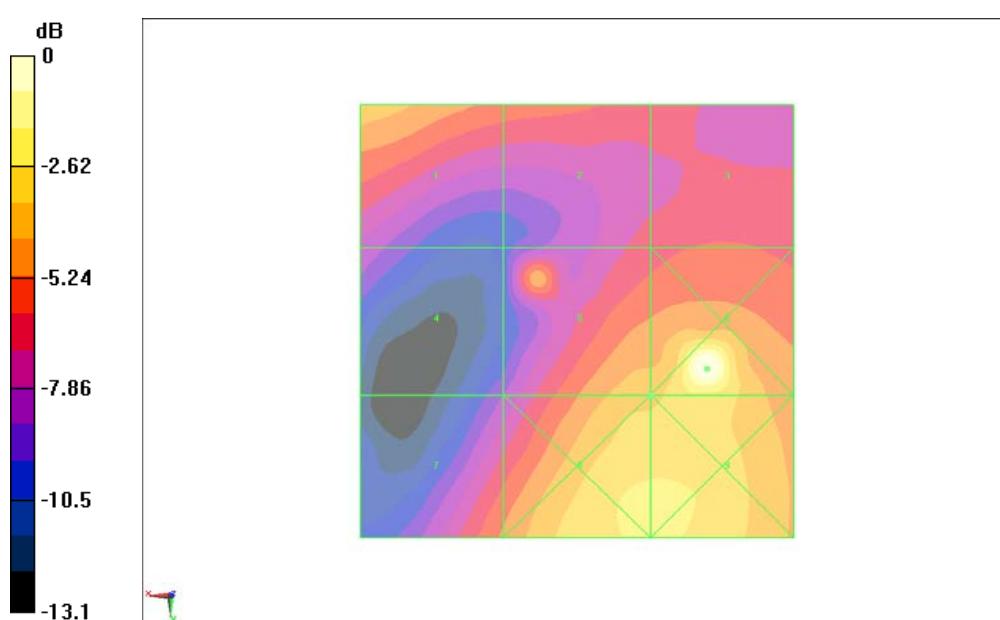**Fig B.14 HAC RF E-Field CDMA 1900 Middle**

HAC RF E-Field CDMA 1900 Low – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 42 V/m

Probe Modulation Factor = 2.91


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.8 V/m; Power Drift = 0.090 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
39.8 M4	31.8 M4	31.4 M4
Grid 4	Grid 5	Grid 6
24.7 M4	42 M4	42.7 M4
Grid 7	Grid 8	Grid 9
37.3 M4	47.2 M4	47.2 M4

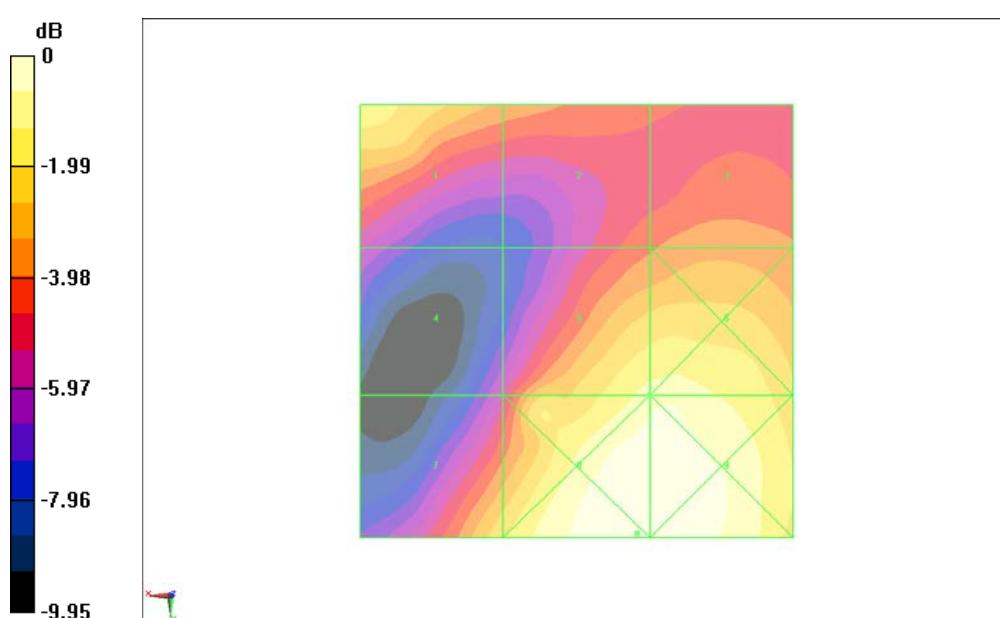

0 dB = 47.2V/m

Fig B.15 HAC RF E-Field CDMA 1900 Low

HAC RF H-Field CDMA 1700 High**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1700; Frequency: 1753.75 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.111 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.109 A/m; Power Drift = 0.00144 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.111 M4	0.111 M4	0.102 M4
0.113 M4	0.109 M4	0.099 M4
0.135 M4	0.111 M4	0.081 M4

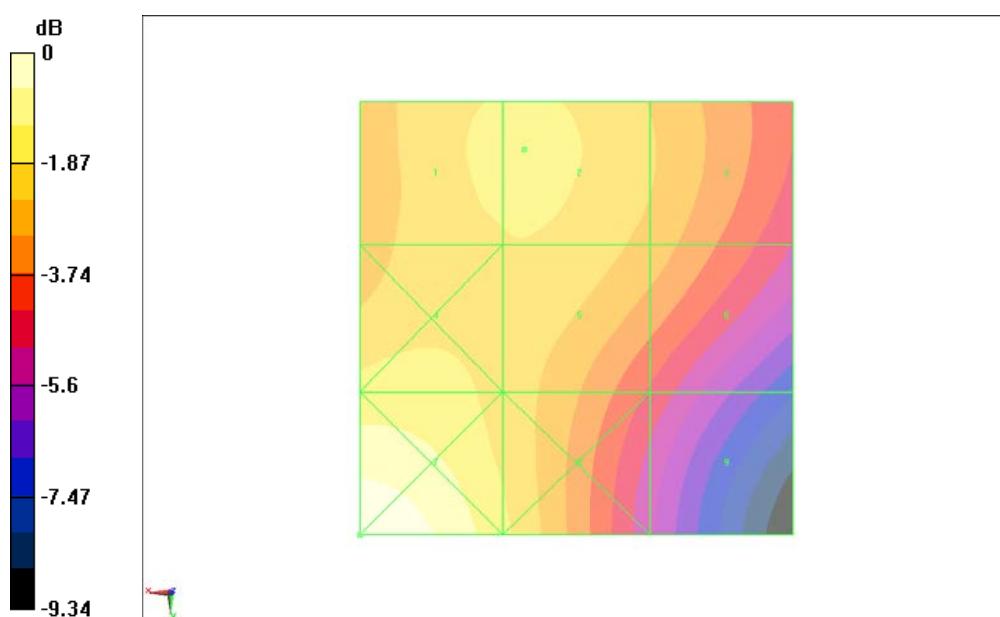**Fig B.16 HAC RF H-Field CDMA 1700 High**

HAC RF H-Field CDMA 1700 Middle**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1700; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.135 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.129 A/m; Power Drift = 0.000744 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.135 M4	0.135 M4	0.123 M4
Grid 4	Grid 5	Grid 6
0.136 M4	0.131 M4	0.117 M4

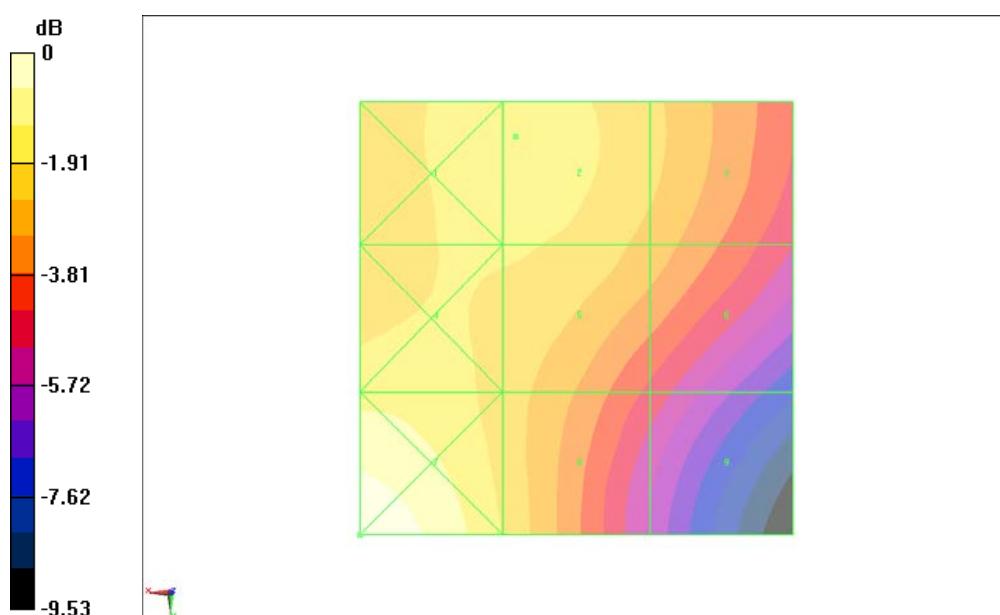

0 dB = 0.161A/m

Fig B.17 HAC RF H-Field CDMA 1700 Middle

HAC RF H-Field CDMA 1700 Low**Date:** 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1700; Frequency: 1711.25 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.127 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.120 A/m; Power Drift = 0.025 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.127 M4	0.127 M4	0.115 M4
Grid 4	Grid 5	Grid 6
0.129 M4	0.122 M4	0.108 M4

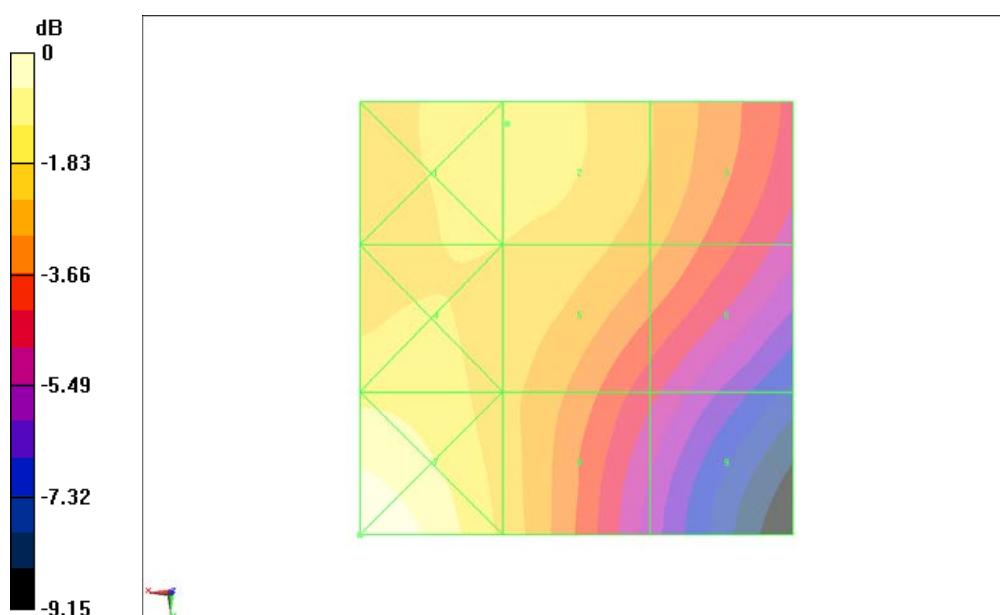

0 dB = 0.151A/m

Fig B.18 HAC RF H-Field CDMA 1700 Low

HAC RF H-Field CDMA 800 High – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.114 A/m

Probe Modulation Factor = 0.904


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.103 A/m; Power Drift = -0.127 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.153 M4	0.114 M4	0.079 M4
Grid 4	Grid 5	Grid 6
0.149 M4	0.109 M4	0.074 M4

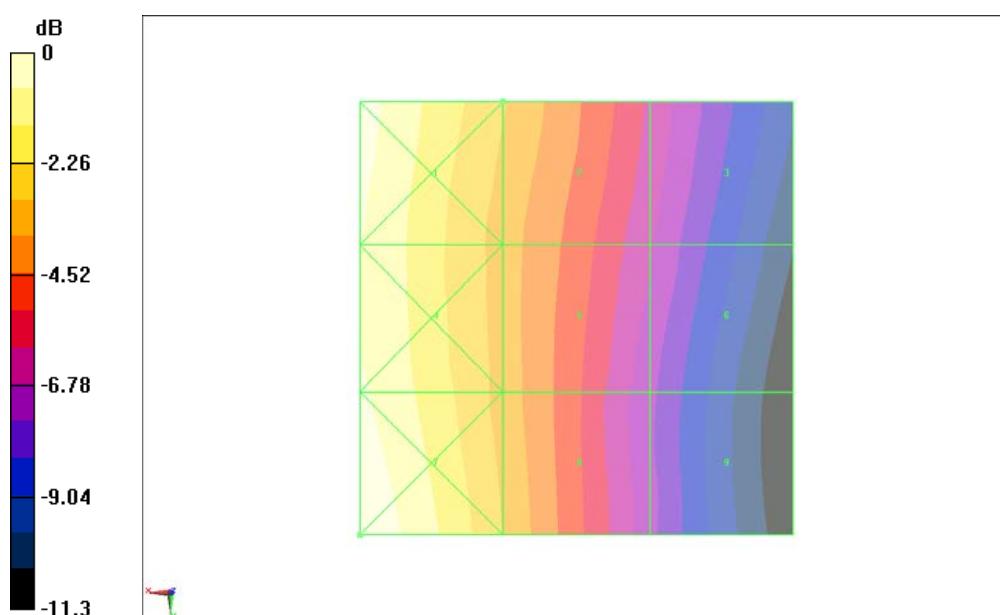

0 dB = 0.160A/m

Fig B.19 HAC RF H-Field CDMA 800 High

HAC RF H-Field CDMA 800 Middle – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.115 A/m

Probe Modulation Factor = 0.900


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.105 A/m; Power Drift = -0.133 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.149 M4	0.115 M4	0.077 M4
Grid 4	Grid 5	Grid 6
0.141 M4	0.107 M4	0.075 M4

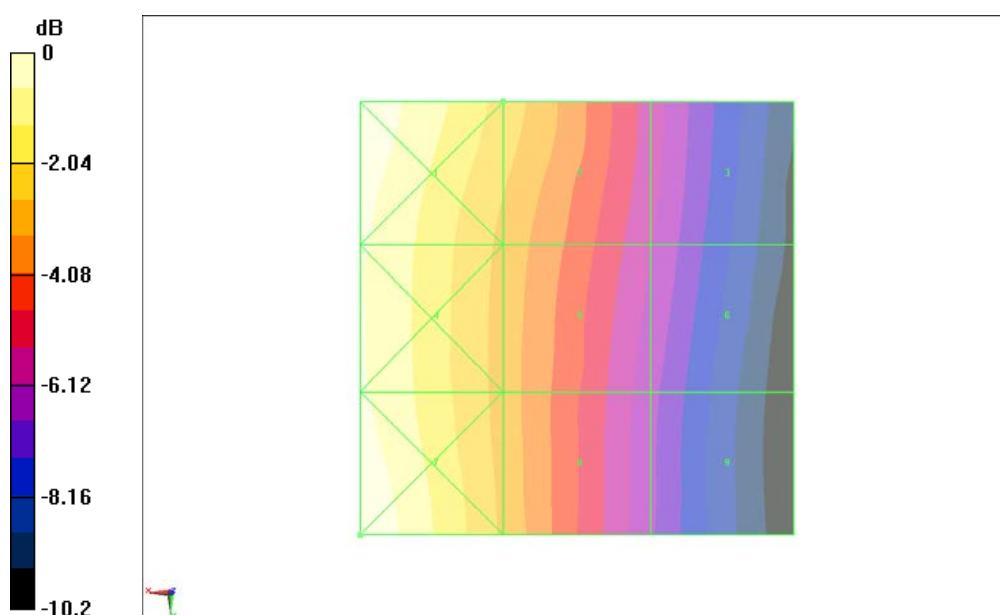

0 dB = 0.150A/m

Fig B.20 HAC RF H-Field CDMA 800 Middle

HAC RF H-Field CDMA 800 Low – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.120 A/m

Probe Modulation Factor = 0.906


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.100 A/m; Power Drift = -0.056 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.154 M4	0.120 M4	0.077 M4
Grid 4	Grid 5	Grid 6
0.140 M4	0.109 M4	0.074 M4

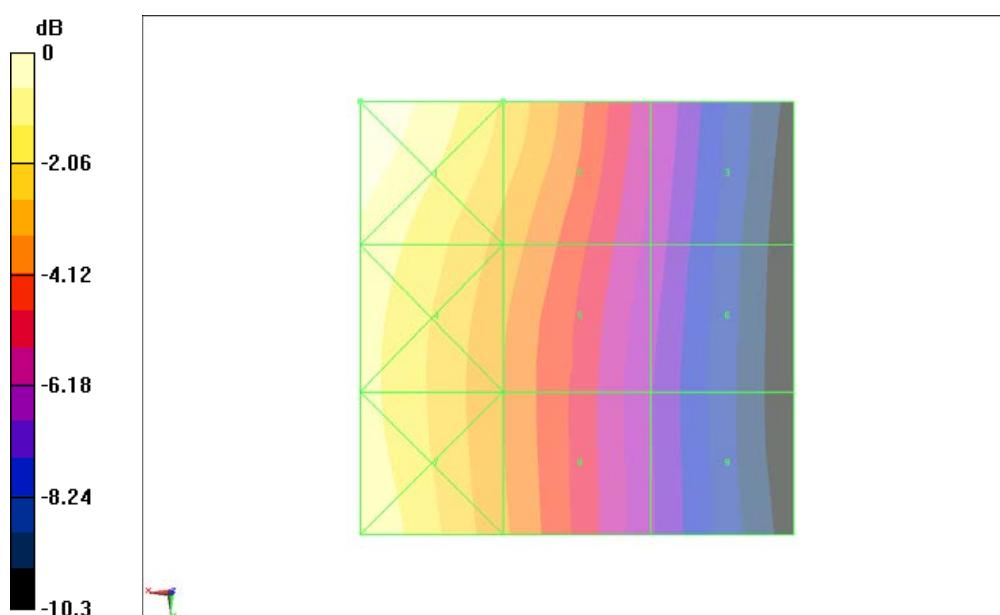

$$0 \text{ dB} = 0.154 \text{ A/m}$$

Fig B.21 HAC RF H-Field CDMA 800 Low

HAC RF H-Field CDMA 1900 High – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.093 A/m

Probe Modulation Factor = 0.914


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.106 A/m; Power Drift = 0.123 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.090 M4	0.093 M4	0.091 M4
Grid 4	Grid 5	Grid 6
0.086 M4	0.092 M4	0.090 M4

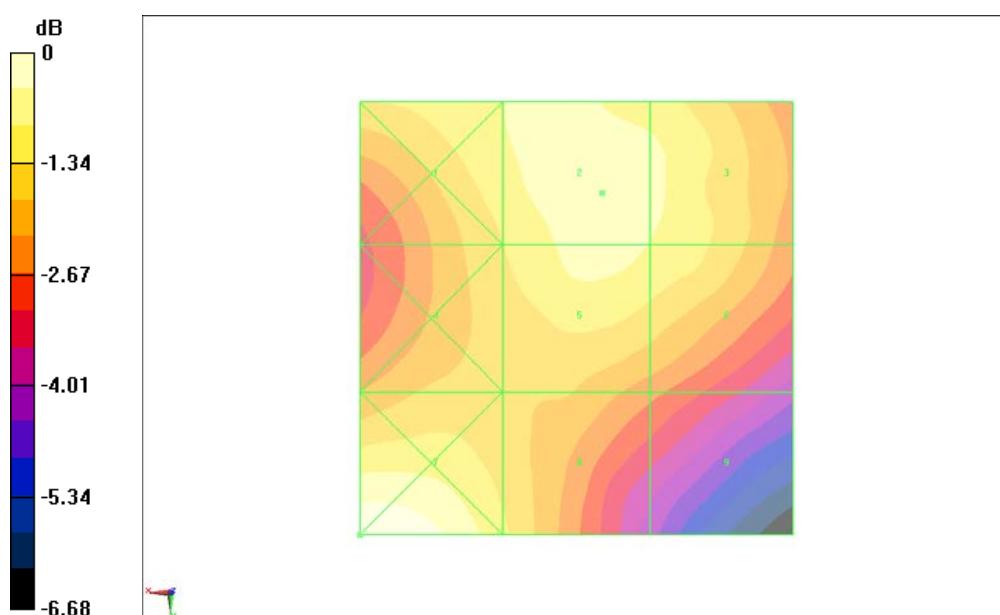

0 dB = 0.100A/m

Fig B.22 HAC RF H-Field CDMA 1900 High

HAC RF H-Field CDMA 1900 Middle – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.092 A/m

Probe Modulation Factor = 0.935


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.102 A/m; Power Drift = -0.024 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.088 M4	0.092 M4	0.090 M4
Grid 4	Grid 5	Grid 6
0.085 M4	0.090 M4	0.089 M4

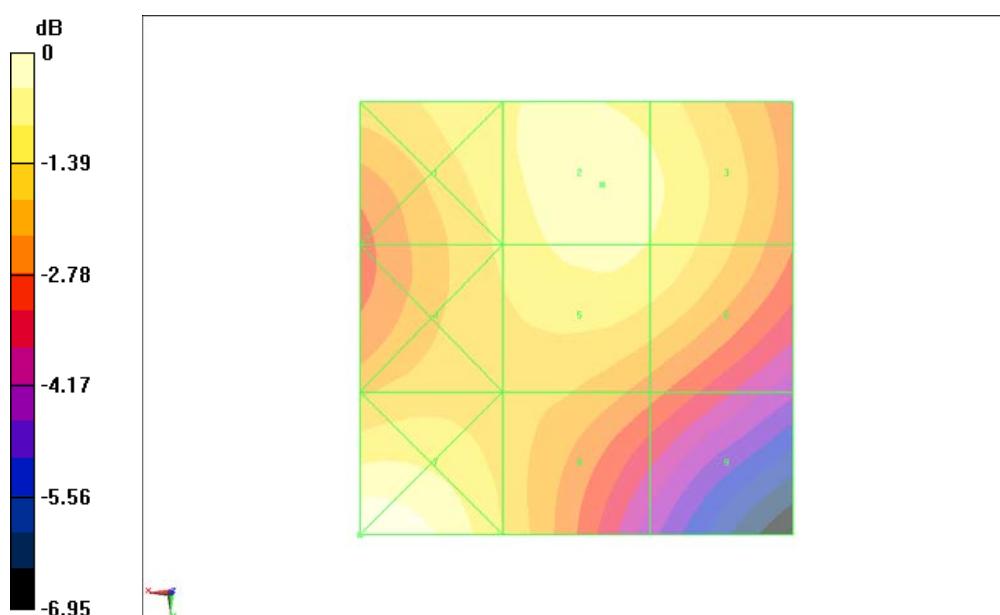**Fig B.23 HAC RF H-Field CDMA 1900 Middle**

HAC RF H-Field CDMA 1900 Low – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.104 A/m

Probe Modulation Factor = 0.927


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.116 A/m; Power Drift = -0.029 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.100 M4	0.104 M4	0.101 M4
Grid 4	Grid 5	Grid 6
0.098 M4	0.102 M4	0.100 M4

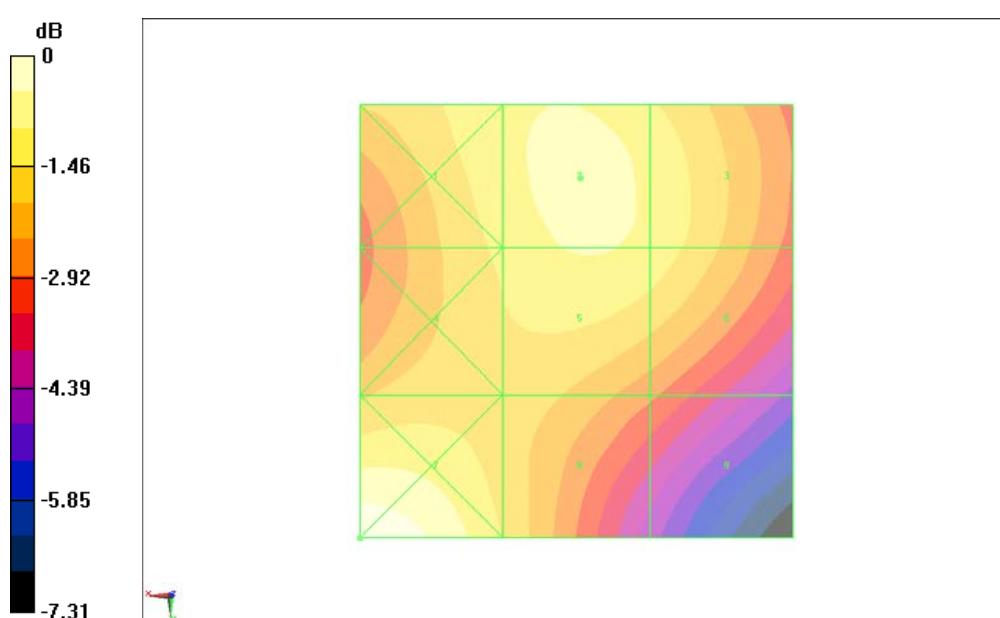

0 dB = 0.114A/m

Fig B.24 HAC RF H-Field CDMA 1900 Low

HAC RF H-Field CDMA 800 High – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.161 A/m

Probe Modulation Factor = 2.83


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.037 A/m; Power Drift = 0.054 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.191 M4	0.155 M4	0.092 M4
Grid 4	Grid 5	Grid 6
0.169 M4	0.124 M4	0.084 M4

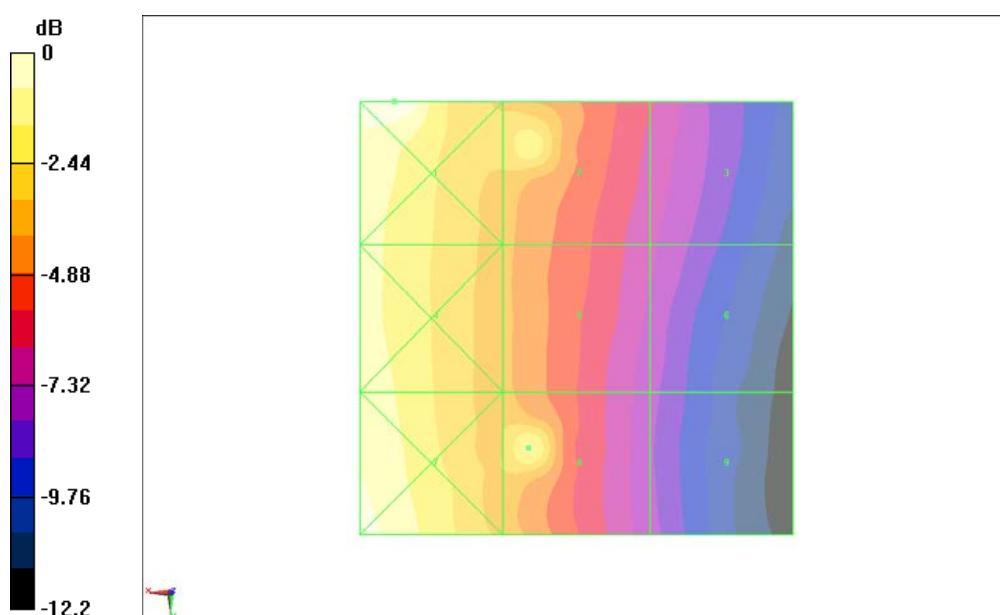

0 dB = 0.191A/m

Fig B.25 HAC RF H-Field CDMA 800 High

HAC RF H-Field CDMA 800 Middle – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.131 A/m

Probe Modulation Factor = 2.79


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.038 A/m; Power Drift = -0.141 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.165 M4	0.131 M4	0.089 M4
Grid 4	Grid 5	Grid 6
0.156 M4	0.121 M4	0.085 M4

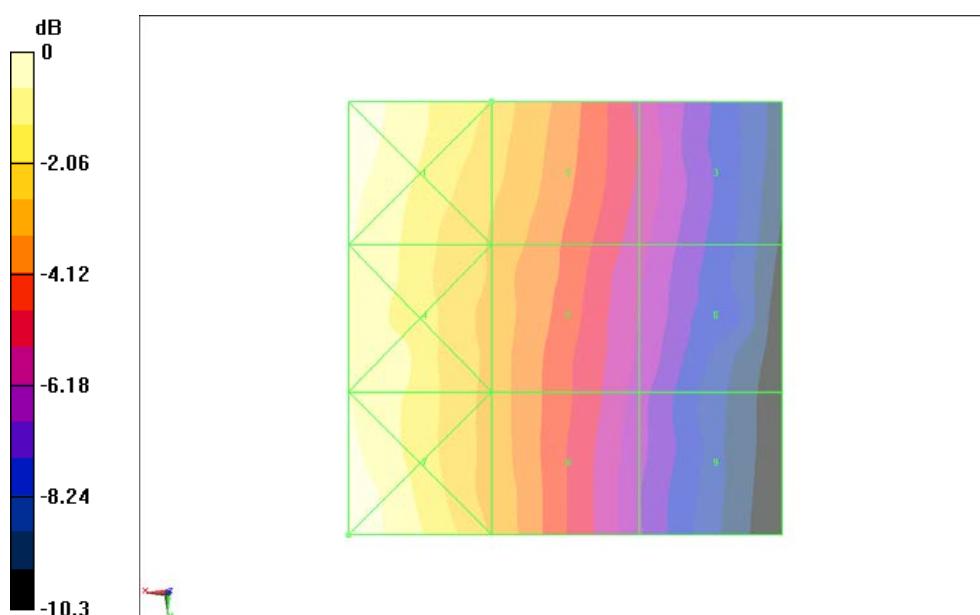**Fig B.26 HAC RF H-Field CDMA 800 Middle**

HAC RF H-Field CDMA 800 Low – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.136 A/m

Probe Modulation Factor = 2.6


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.037 A/m; Power Drift = 0.188 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.164 M4	0.129 M4	0.082 M4
Grid 4	Grid 5	Grid 6
0.149 M4	0.116 M4	0.078 M4

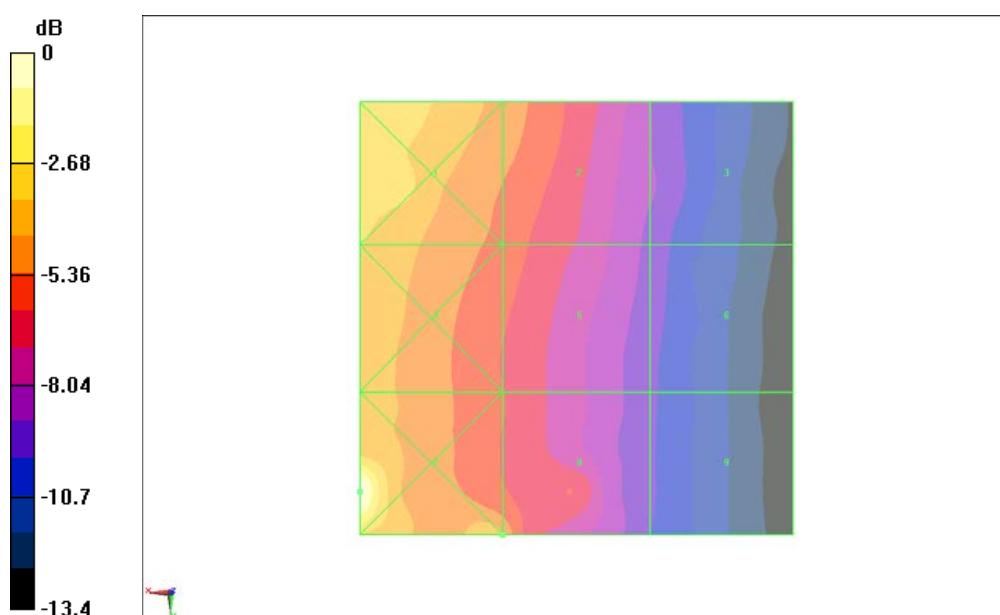

0 dB = 0.224A/m

Fig B.27 HAC RF H-Field CDMA 800 Low

HAC RF H-Field CDMA 1900 High – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.112 A/m

Probe Modulation Factor = 2.69


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.041 A/m; Power Drift = -0.147 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.100 M4	0.106 M4	0.104 M4
Grid 4	Grid 5	Grid 6
0.098 M4	0.105 M4	0.112 M4

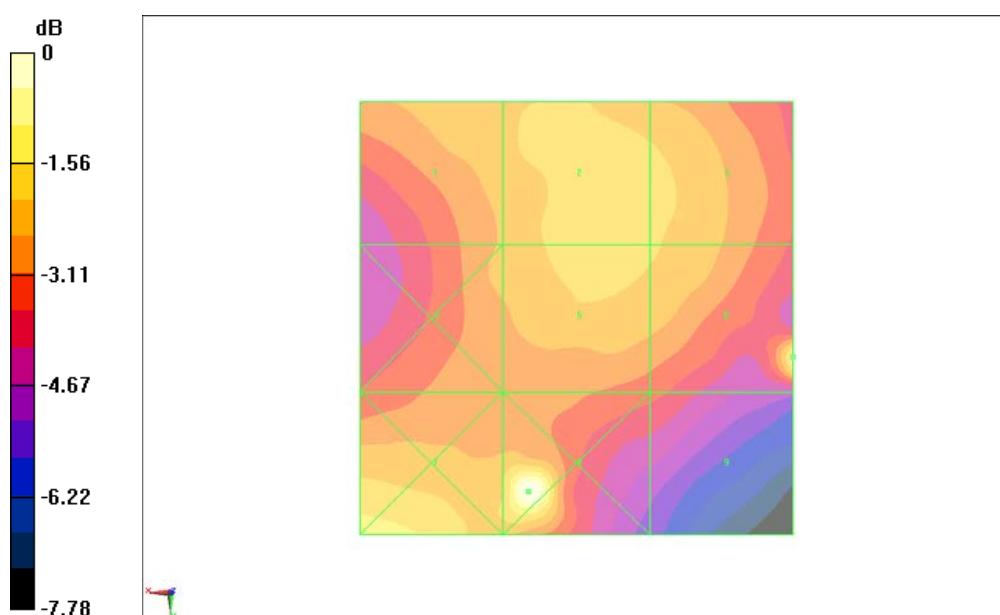**Fig B.28 HAC RF H-Field CDMA 1900 High**

HAC RF H-Field CDMA 1900 Middle – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.108 A/m

Probe Modulation Factor = 2.82


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.039 A/m; Power Drift = 0.024 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.110 M4	0.108 M4	0.106 M4
Grid 4	Grid 5	Grid 6
0.098 M4	0.105 M4	0.106 M4

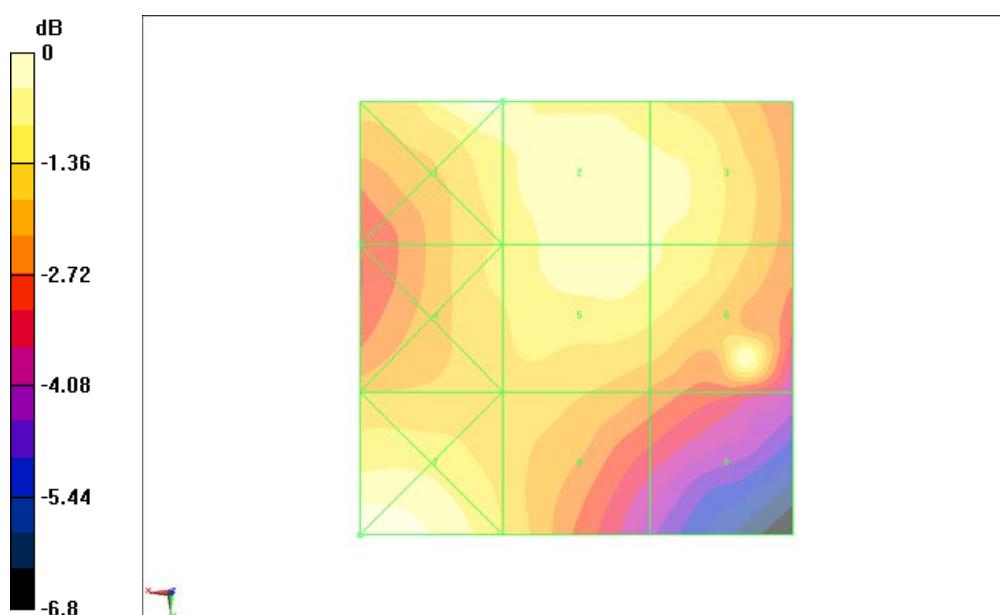

0 dB = 0.112A/m

Fig B.29 HAC RF H-Field CDMA 1900 Middle

HAC RF H-Field CDMA 1900 Low – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.129 A/m

Probe Modulation Factor = 2.79


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.044 A/m; Power Drift = -0.00376 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.112 M4	0.206 M3	0.114 M4
Grid 4	Grid 5	Grid 6
0.110 M4	0.116 M4	0.114 M4

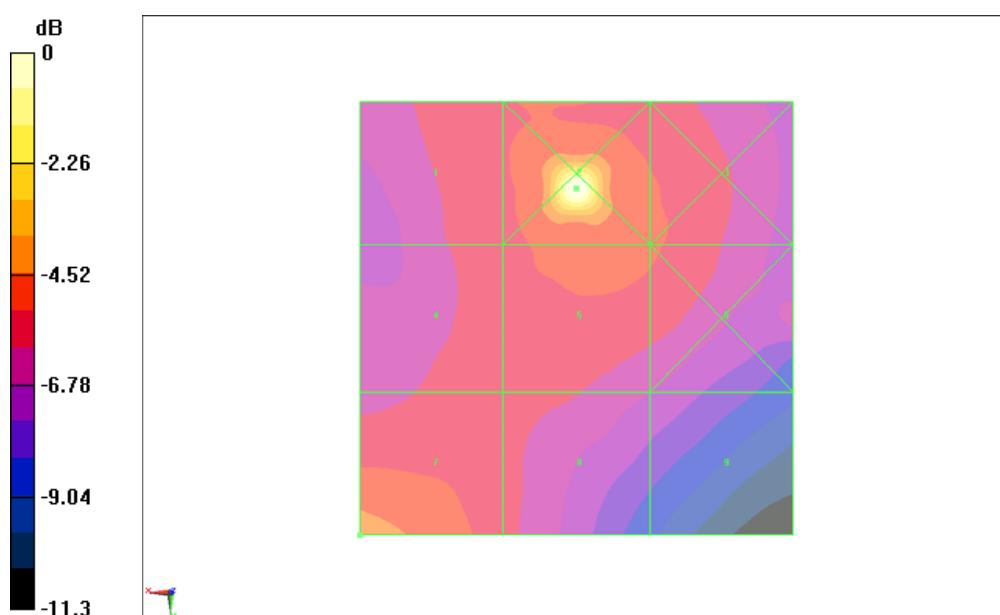

0 dB = 0.206A/m

Fig B.30 HAC RF H-Field CDMA 1900 Low

Total M-rating of CDMA 1700 MHz Band**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1700; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303 Probe: H3DV6 - SN6138; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 52.3 V/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 49.9 V/m; Power Drift = -0.016 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
38.9 M4	38 M4	38.9 M4
Grid 4	Grid 5	Grid 6
33.8 M4	52.1 M4	52.3 M4

Grid 7	Grid 8	Grid 9
45.8 M4	56.4 M4	56.3 M4

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.135 A/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.129 A/m; Power Drift = 0.000744 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.135 M4	0.135 M4	0.123 M4
Grid 4	Grid 5	Grid 6
0.136 M4	0.131 M4	0.117 M4

Grid 7	Grid 8	Grid 9
0.161 M4	0.129 M4	0.095 M4

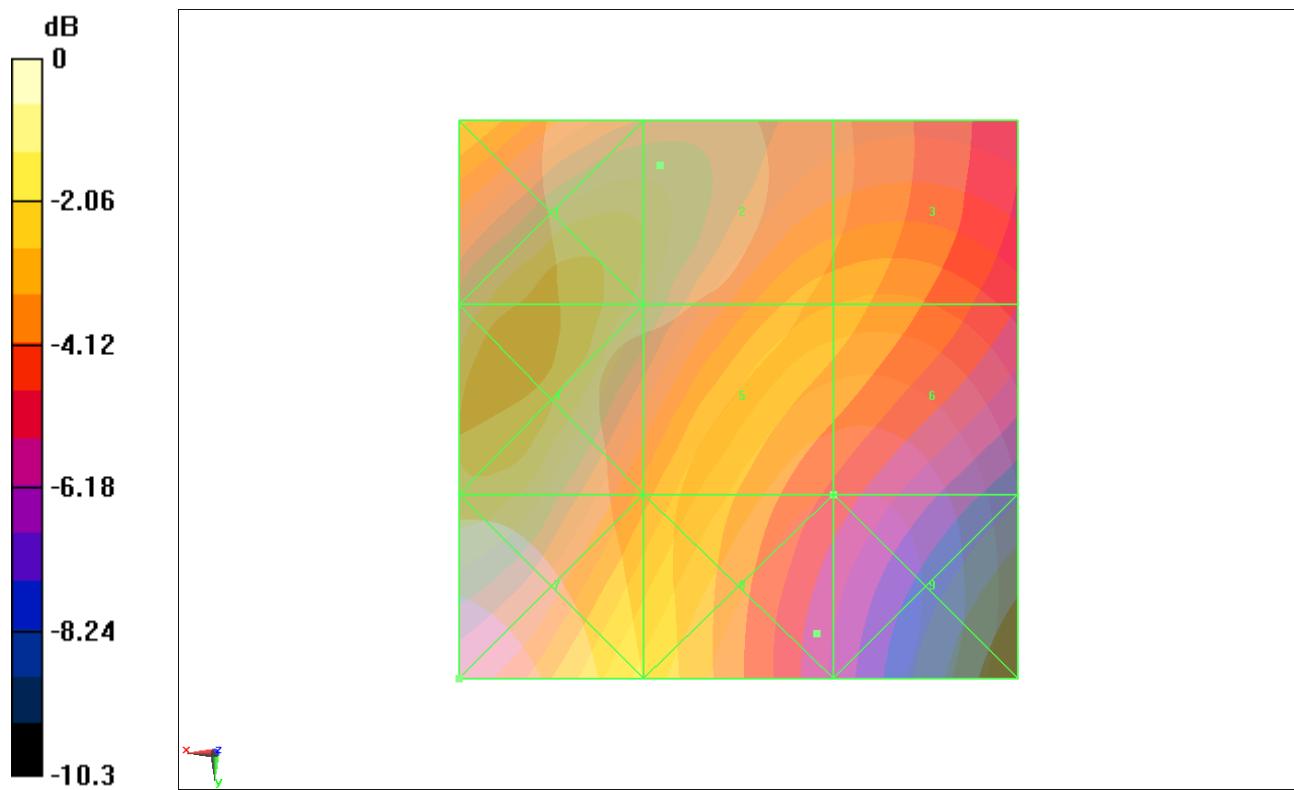

RF RESULTS AND M-RATING	E-Field M Rating	M4 (AWF 0 dB)
	H-Field M Rating	M4 (AWF 0 dB)
	Total M Rating	M4

Fig B.31 Total M-rating of CDMA 1700

Total M-rating of CDMA 800 MHz Band – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 848.31 MHz; Frequency: 824.7 MHz;

Duty Cycle: 1:1

Probe: ER3DV6 - SN2303 Probe: H3DV6 - SN6138; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 75.2 V/m

Probe Modulation Factor = 0.947

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 102.3 V/m; Power Drift = -0.043 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
64.1 M4	71.4 M4	69.9 M4
Grid 4	Grid 5	Grid 6
68.9 M4	75.2 M4	73.7 M4

Grid 7	Grid 8	Grid 9
72.5 M4	75.2 M4	73.5 M4

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.120 A/m

Probe Modulation Factor = 0.906

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.100 A/m; Power Drift = -0.056 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.154 M4	0.120 M4	0.077 M4
Grid 4	Grid 5	Grid 6
0.140 M4	0.109 M4	0.074 M4

Grid 7	Grid 8	Grid 9
0.142 M4	0.106 M4	0.071 M4

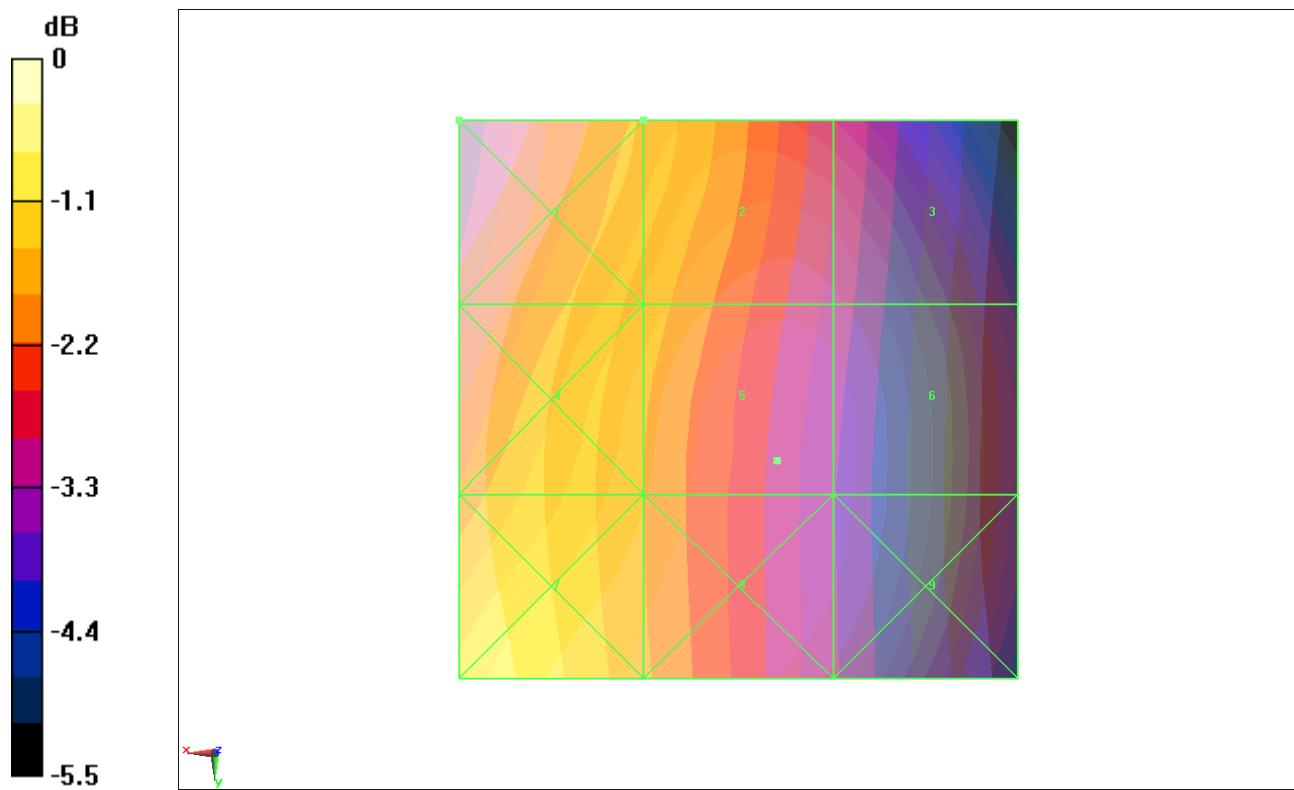

RF RESULTS AND M-RATING	E-Field M Rating	M4 (AWF 0 dB)
	H-Field M Rating	M4 (AWF 0 dB)
	Total M Rating	M4

Fig B.32 Total M-rating of CDMA 800

Total M-rating of CDMA 1900 MHz Band – SO55**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303 Probe: H3DV6 - SN6138; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 36.7 V/m

Probe Modulation Factor = 0.939

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.2 V/m; Power Drift = 0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
35.7 M4	28.4 M4	27.8 M4
Grid 4	Grid 5	Grid 6
21.5 M4	36.7 M4	37.3 M4

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.104 A/m

Probe Modulation Factor = 0.927

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.116 A/m; Power Drift = -0.029 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.100 M4	0.104 M4	0.101 M4
Grid 4	Grid 5	Grid 6
0.098 M4	0.102 M4	0.100 M4

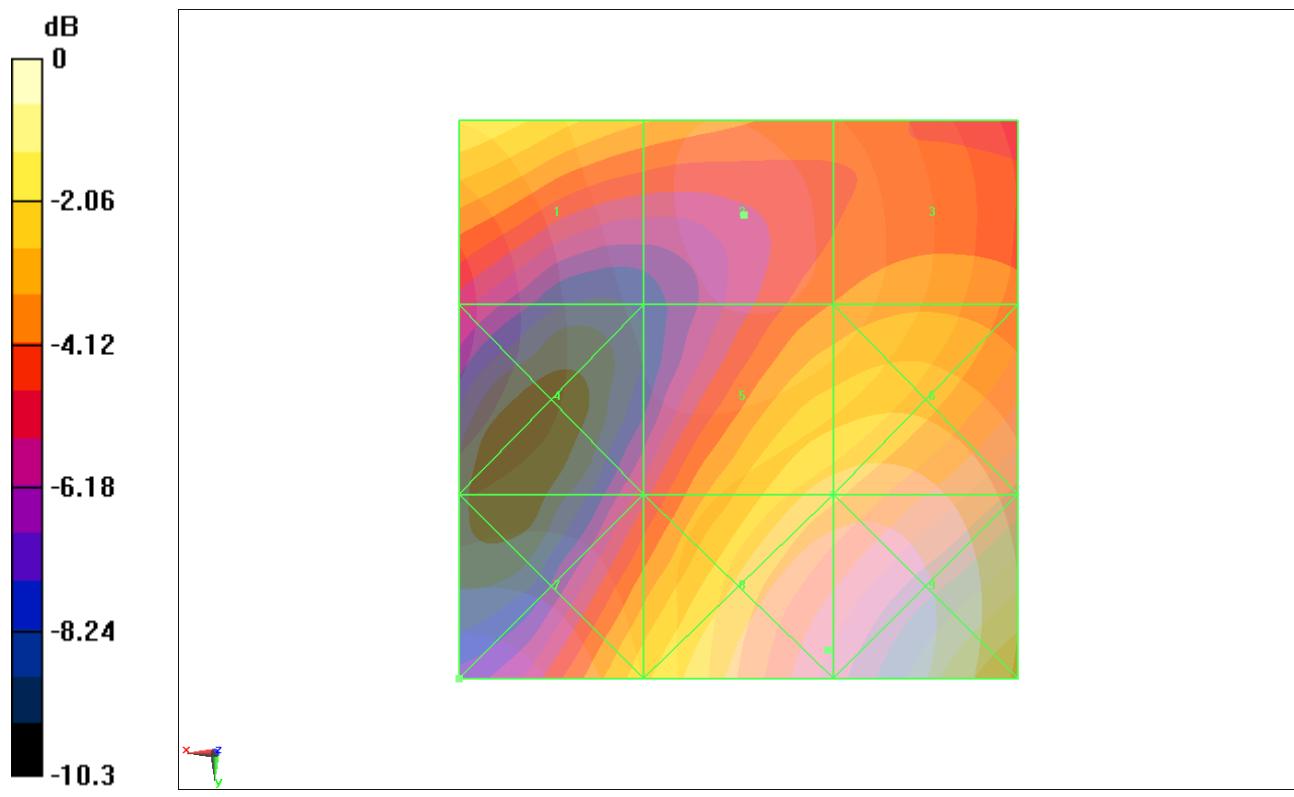


Fig B.33 Total M-rating of CDMA 1900

	E-Field M Rating	M4 (AWF 0 dB)
RF RESULTS AND M-RATING	H-Field M Rating	M4 (AWF 0 dB)
	Total M Rating	M4

Total M-rating of CDMA 800 MHz Band – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 800; Frequency: 848.31 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303 Probe: H3DV6 - SN6138; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 80.5 V/m

Probe Modulation Factor = 2.9

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.8 V/m; Power Drift = 0.127 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
67 M4	85.6 M4	75.3 M4
Grid 4	Grid 5	Grid 6
72 M4	80.2 M4	78.9 M4

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.161 A/m

Probe Modulation Factor = 2.83


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.037 A/m; Power Drift = 0.054 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.191 M4	0.155 M4	0.092 M4
Grid 4	Grid 5	Grid 6
0.169 M4	0.124 M4	0.084 M4

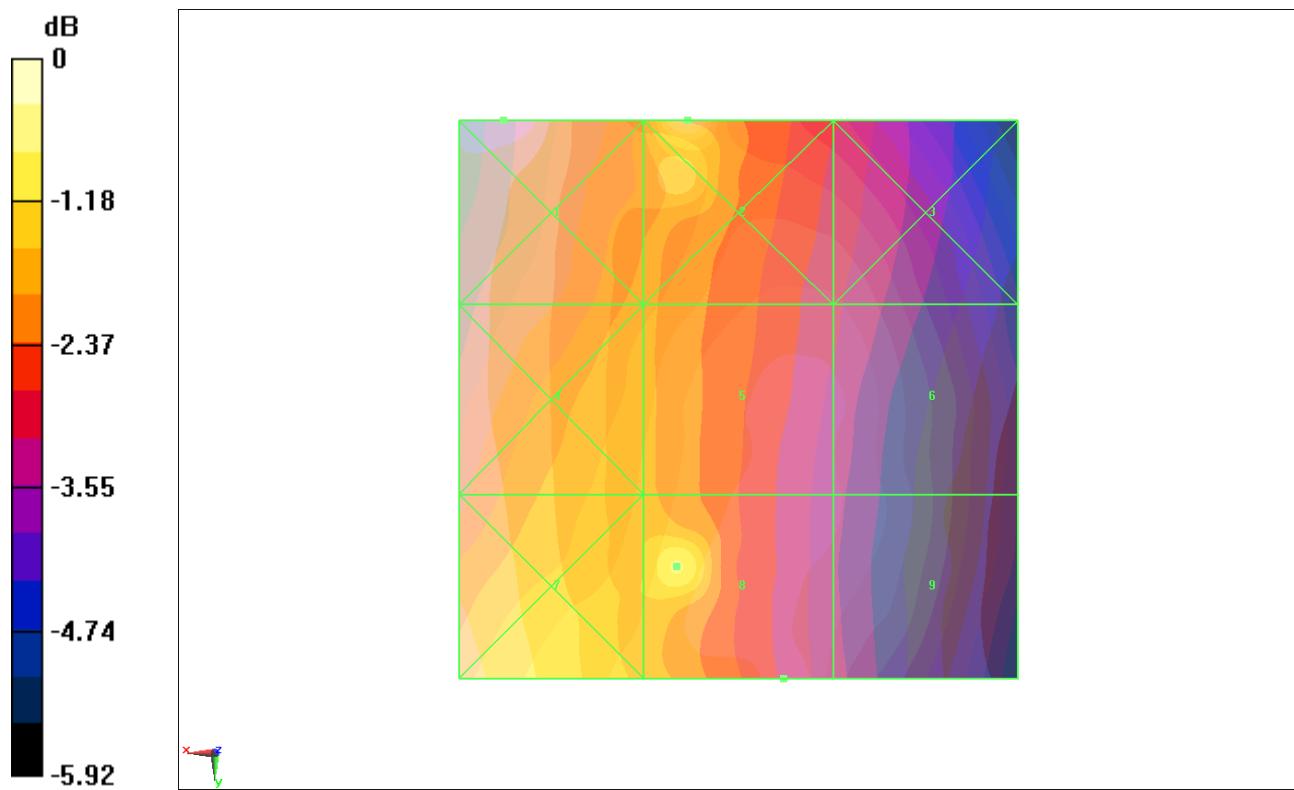

RF RESULTS AND M-RATING	E-Field M Rating	M4 (AWF 0 dB)
	H-Field M Rating	M4 (AWF 0 dB)
	Total M Rating	M4

Fig B.34 Total M-rating of CDMA 800

Total M-rating of CDMA 1900 MHz Band – SO3**Date: 8/6/2012**

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Ambient Temperature: 22.7°C

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303 Probe: H3DV6 - SN6138; ConvF(1, 1, 1)

E Scan - ER3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 43.9 V/m

Probe Modulation Factor = 2.93

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.4 V/m; Power Drift = -0.044 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
37.9 M4	31.9 M4	34.6 M4
Grid 4	Grid 5	Grid 6
23.7 M4	43.9 M4	52.2 M4

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.129 A/m

Probe Modulation Factor = 2.79


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.044 A/m; Power Drift = -0.00376 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.112 M4	0.206 M3	0.114 M4
Grid 4	Grid 5	Grid 6
0.110 M4	0.116 M4	0.114 M4

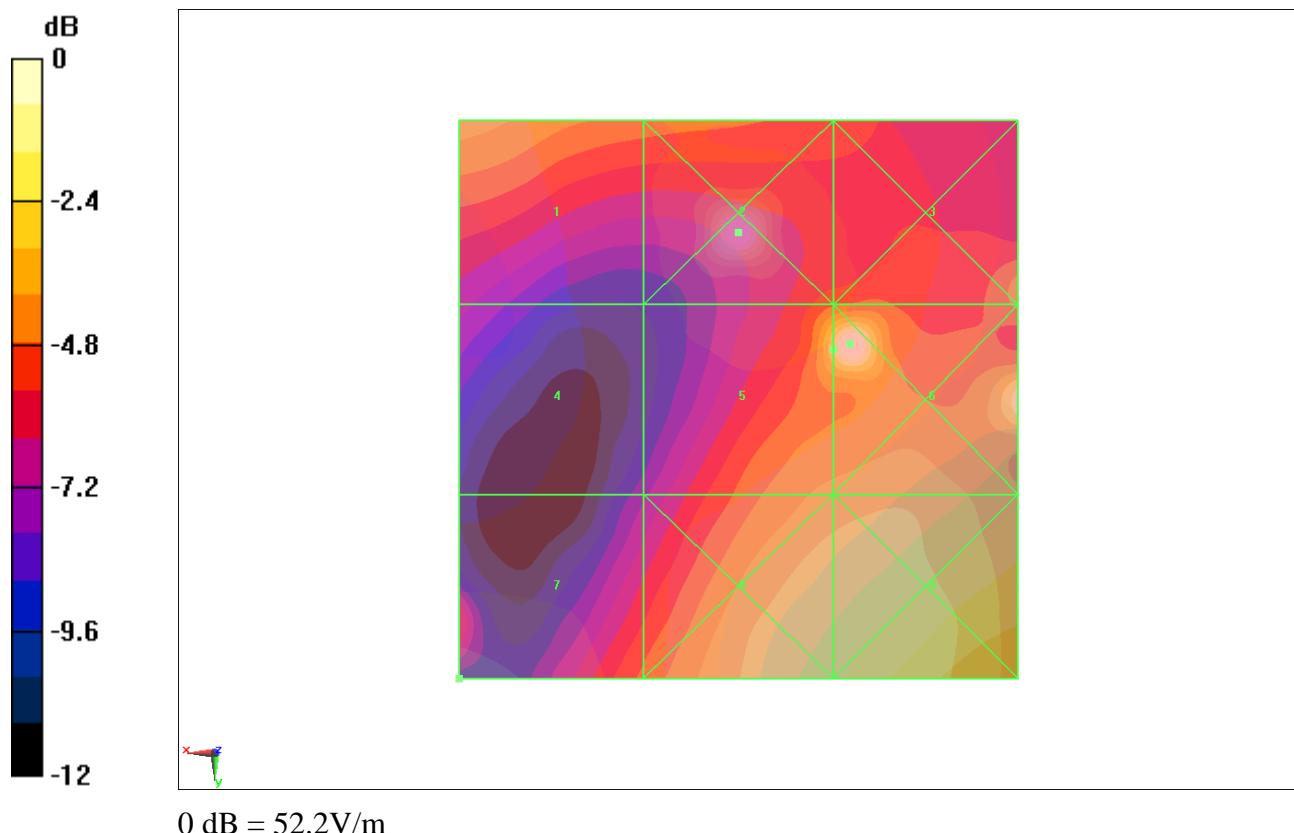

RF RESULTS AND M-RATING	E-Field M Rating	M4 (AWF 0 dB)
	H-Field M Rating	M4 (AWF 0 dB)
	Total M Rating	M4

Fig B.35 Total M-rating of CDMA 1900

ANNEX C SYSTEM VALIDATION RESULT

E SCAN of Dipole 800 MHz

Date: 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Communication System: CW; Frequency: 800 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1)

E Scan – measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 162.6 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 105.8 V/m; Power Drift = -0.037 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
157.5 M4	162.6 M4	148.4 M4
Grid 4	Grid 5	Grid 6
87.3 M4	90.0 M4	87.5 M4

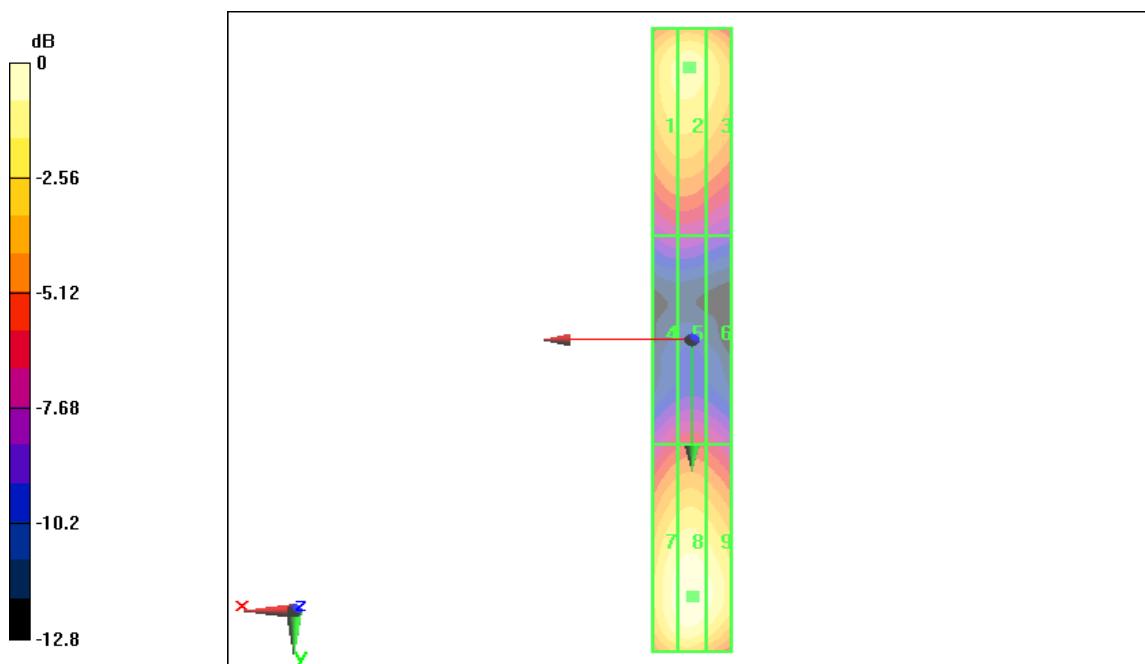

0 dB = 162.6V/m

H SCAN of Dipole 800 MHz

Date: 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Communication System: CW; Frequency: 800MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan – measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.464 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.495 A/m; Power Drift = 0.04 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.384 M4	0.403 M4	0.395 M4
Grid 4	Grid 5	Grid 6
0.433 M4	0.464 M4	0.441 M4

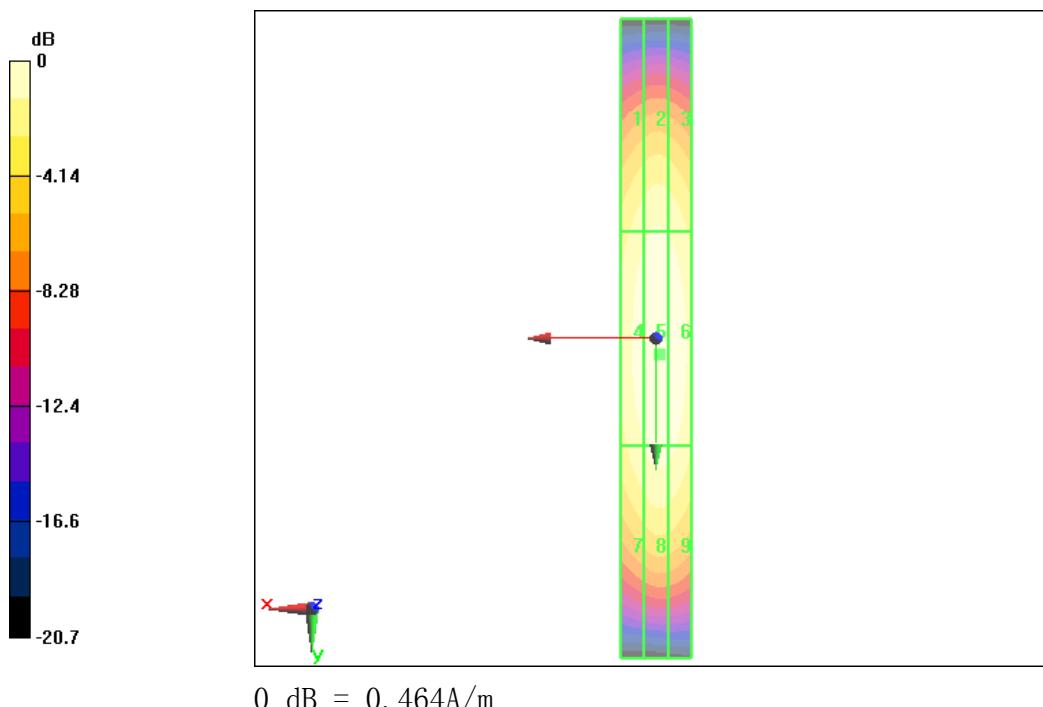

E SCAN of Dipole 1900 MHz

Date: 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ER3DV6 - SN2303;ConvF(1, 1, 1)

E Scan – measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 143.9 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 161.5 V/m; Power Drift = -0.051 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
134.8 M2	140.1 M2	137.0 M2
Grid 4	Grid 5	Grid 6
90.6 M3	93.7 M3	90.7 M3

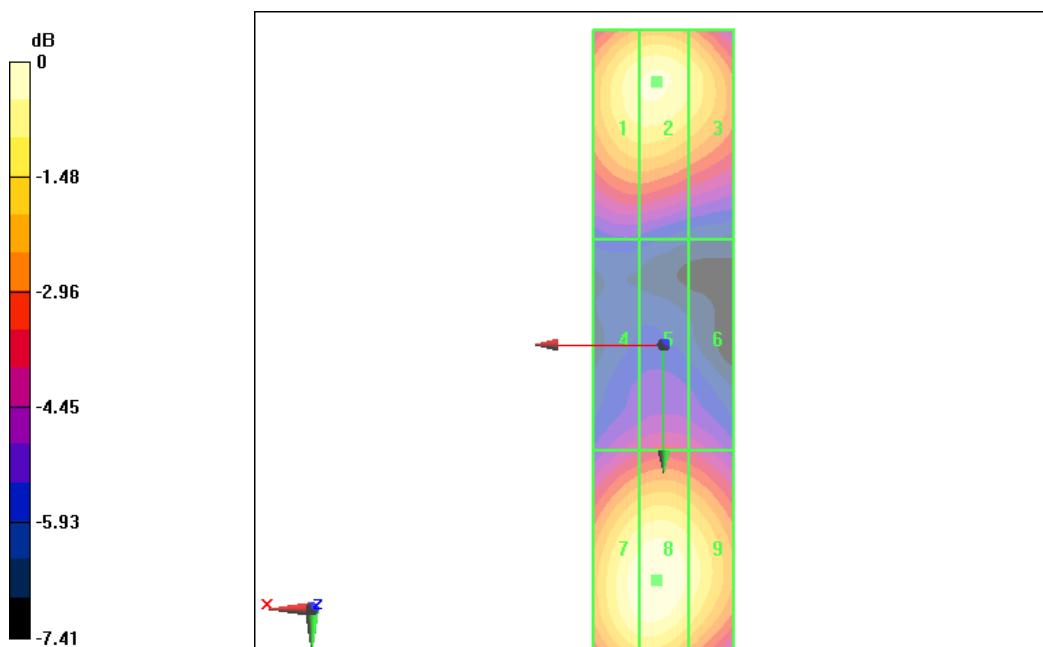

$$0 \text{ dB} = 143.9 \text{ V/m}$$

H SCAN of Dipole 1900 MHz

Date: 8/6/2012

Electronics: DAE4 Sn777

Medium: Air

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: H3DV6 - SN6138;

H Scan – measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.461 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.489 A/m; Power Drift = -0.02 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.391 M2	0.422 M2	0.397 M2
Grid 4	Grid 5	Grid 6
0.438 M2	0.461 M2	0.452 M2

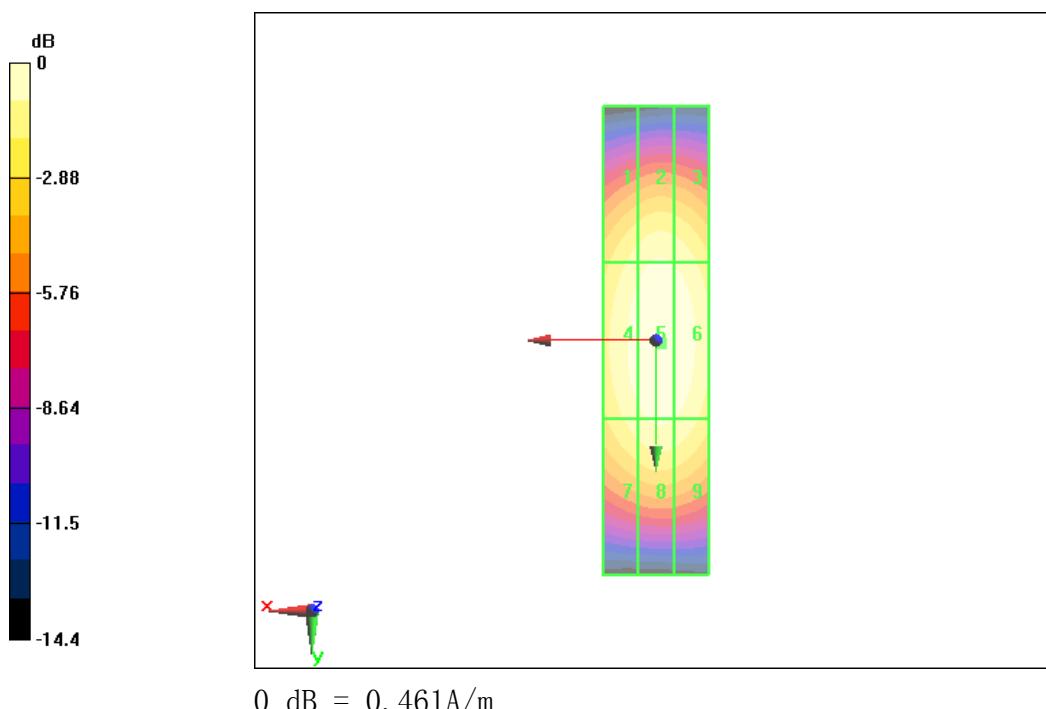

ANNEX D PROBE CALIBRATION CERTIFICATE**E_Probe ER3DV6**

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **TA Shanghai (Auden)**Certificate No: **ER3-2303_Feb12****CALIBRATION CERTIFICATE**Object **ER3DV6 - SN:2303**

Calibration procedure(s) **QA CAL-02.v6, QA CAL-25.v4**
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **February 21, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41496087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S6054 (3c)	29-Mar-11 (No. 217-01368)	Apr-12
Reference 20 dB Attenuator	SN: S5388 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ER3DV6	SN: 2328	11-Oct-11 (No. ER3-2328_Oct11)	Oct-12
DAE4	SN: 789	30-Jan-12 (No. DAE4-789_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390565	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name	Function	Signature
	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 22, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- $NORM(f)x,y,z$: Assessed for E-field polarization $\theta = 0$ for XY sensors and $\theta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- $NORM(f)x,y,z = NORMx,y,z * frequency_response$ (see Frequency Response Chart).
- $DCPx,y,z$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z$: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- $Spherical isotropy (3D deviation from isotropy)$: in a locally homogeneous field realized using an open waveguide setup.
- $Sensor Offset$: The sensor offset corresponds to the offset of virtual measurement center from the probe-tip (on probe axis). No tolerance required.
- $Connector Angle$: The angle is assessed using the information gained by determining the $NORMx$ (no uncertainty required).



No.2012HAC00028-1

Page 66 of 83

ER3DV6 – SN:2303

February 21, 2012

Probe ER3DV6

SN:2303

Manufactured: November 6, 2002
Calibrated: February 21, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ER3DV6- SN:2303

February 21, 2012

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2303**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V/m})^2$)	1.40	1.42	1.43	$\pm 10.1 \%$
DCP (mV) ^a	100.7	99.2	104.7	

Modulation Calibration Parameters


UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^b (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	111.4	$\pm 3.0 \%$
			Y	0.00	0.00	1.00	139.9	
			Z	0.00	0.00	1.00	133.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^a Numerical linearization parameter: uncertainty not required.^b Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.





ER3DV6- SN:2303

February 21, 2012

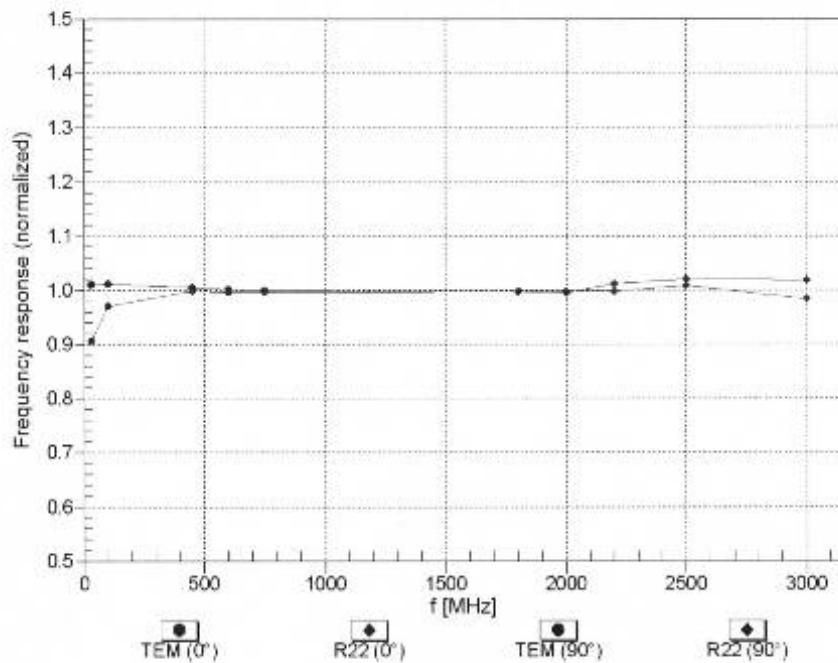Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)



ER3DV6- SN:2303

February 21, 2012

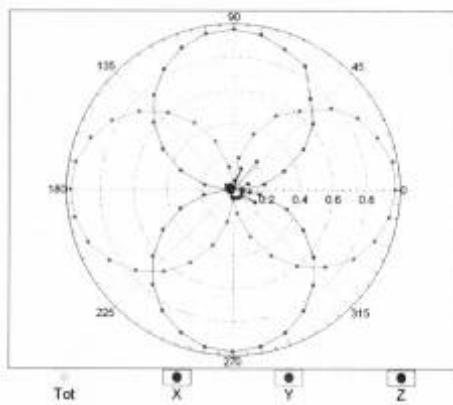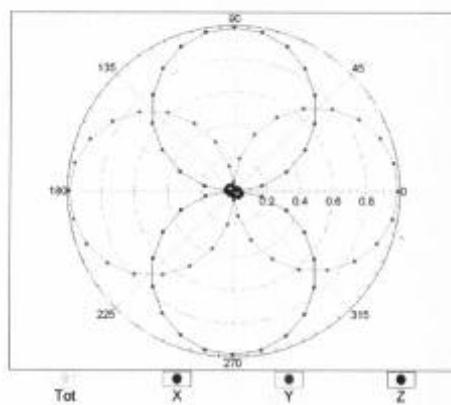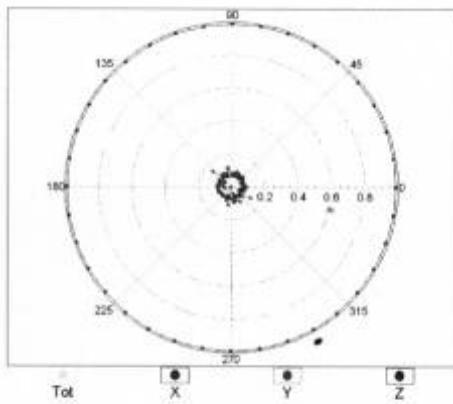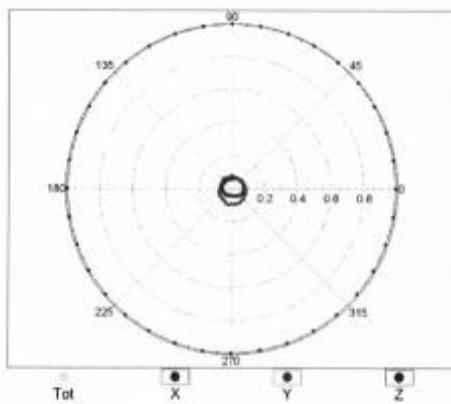Receiving Pattern (ϕ), $\theta = 0^\circ$ $f=600 \text{ MHz, TEM, } 0^\circ$  $f=2500 \text{ MHz, R22, } 0^\circ$ **Receiving Pattern (ϕ), $\theta = 90^\circ$** $f=600 \text{ MHz, TEM, } 90^\circ$  $f=2500 \text{ MHz, R22, } 90^\circ$ 



ER3DV6- SN:2303

February 21, 2012

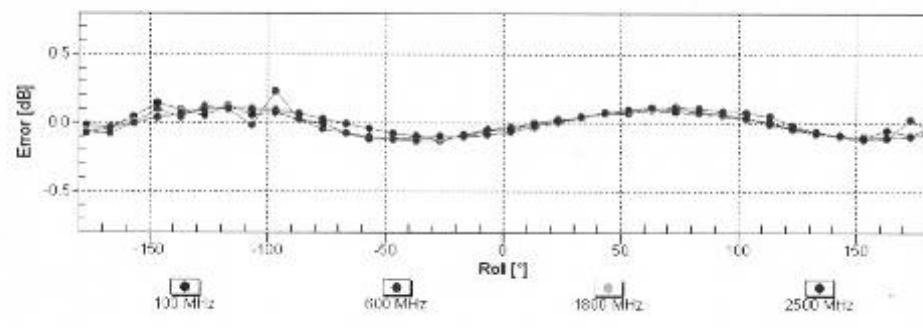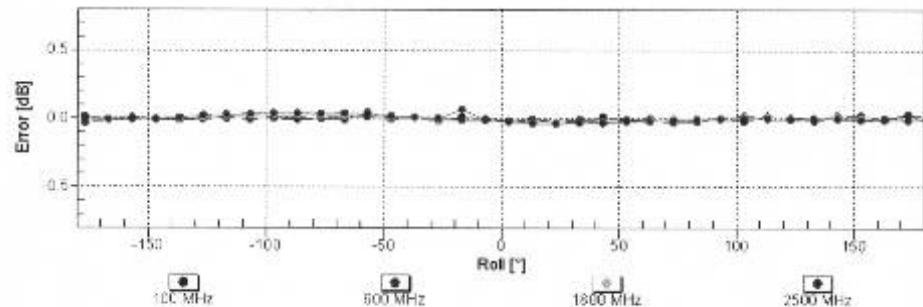Receiving Pattern (ϕ), $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)**Receiving Pattern (ϕ), $\theta = 90^\circ$** Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


ER3DV6- SN:2303

February 21, 2012

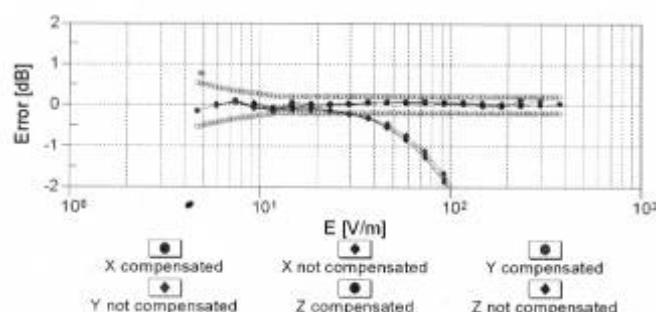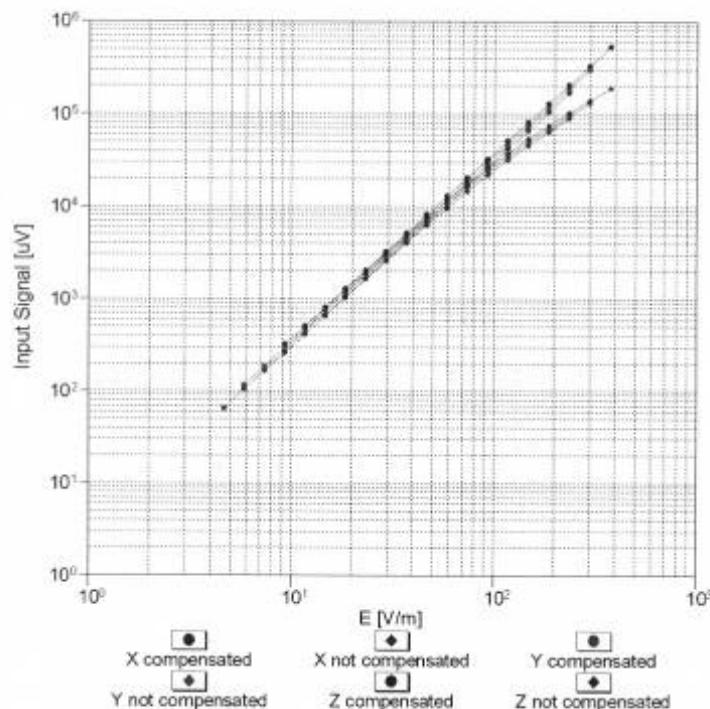Dynamic Range f(E-field)
(TEM cell , f = 900 MHz)Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ER3DV6- SN:2303

February 21, 2012

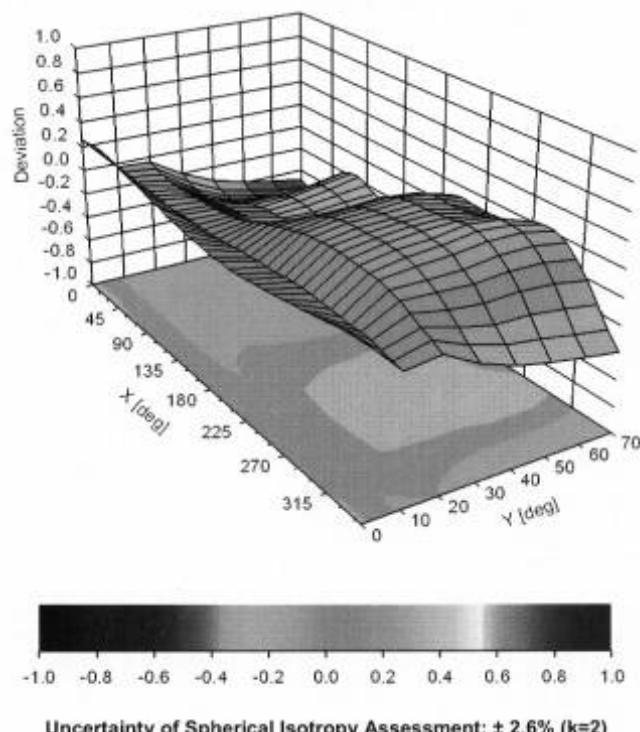Deviation from Isotropy in AirError (ϕ, θ), $f = 900$ MHz

ER3DV6- SN:2303

February 21, 2012

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2303**Other Probe Parameters**

Sensor Arrangement	Rectangular
Connector Angle (°)	-156.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	8 mm
Probe Tip to Sensor X Calibration Point	2.5 mm
Probe Tip to Sensor Y Calibration Point	2.5 mm
Probe Tip to Sensor Z Calibration Point	2.5 mm

H_Probe H3DV6

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client TA Shanghai (Auden)

Certificate No: H3-6138_Feb12

CALIBRATION CERTIFICATE

Object	H3DV6 - SN:6138
Calibration procedure(s)	QA CAL-03.v6, QA CAL-25.v4 Calibration procedure for H-field probes optimized for close near field evaluations in air
Calibration date:	February 21, 2012
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.	
All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.	
Calibration Equipment used (M&TE critical for calibration)	

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe H3DV6	SN: 6182	11-Oct-11 (No. H3-6182_Oct11)	Oct-12
DAE4	SN: 789	30-Jan-12 (No. DAE4-789_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 23, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

NORMx,y,z	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization β	β rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\beta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$: Assessed for E-field polarization $\beta = 0$ for XY sensors and $\beta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- $X,Y,Z(f)_a0a1a2=X,Y,Z_a0a1a2*$ frequency_response (see Frequency Response Chart).
- $DCPx,y,z$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z; A, B, C$ are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- $Spherical isotropy$ (3D deviation from isotropy): in a locally homogeneous field realized using an open waveguide setup.
- $Sensor Offset$: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- $Connector Angle$: The angle is assessed using the information gained by determining the X_a0a1a2 (no uncertainty required).



H3DV6 – SN:6138

February 21, 2012

Probe H3DV6

SN:6138

Manufactured: July 3, 2002
Calibrated: February 21, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

H3DV6- SN:6138

February 21, 2012

DASY/EASY - Parameters of Probe: H3DV6 - SN:6138**Basic Calibration Parameters**

		Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (A/m / √(mV))	a0	2.73E-003	2.93E-003	3.18E-003	± 5.1 %
Norm (A/m / √(mV))	a1	-5.89E-005	-2.38E-004	-2.18E-004	± 5.1 %
Norm (A/m / √(mV))	a2	-5.50E-006	-3.95E-006	-8.28E-007	± 5.1 %
DCP (mV) ^b		93.5	92.1	94.8	

Modulation Calibration Parameters


UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^c (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	130.7	±3.3 %
			Y	0.00	0.00	1.00	125.5	
			Z	0.00	0.00	1.00	133.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^b Numerical linearization parameter: uncertainty not required.^c Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.





H3DV6– SN:6138

February 21, 2012

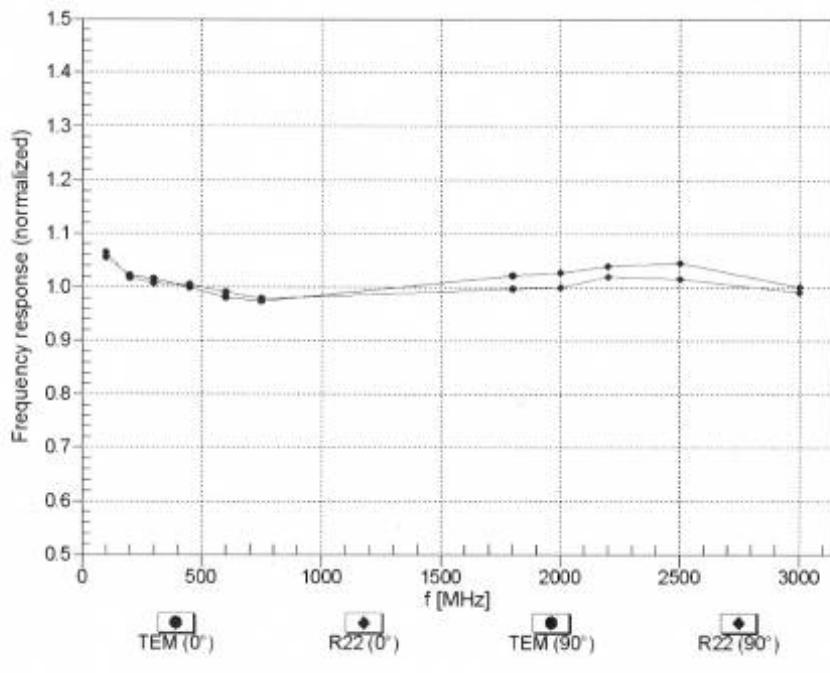Frequency Response of H-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)Uncertainty of Frequency Response of H-field: $\pm 6.3\%$ ($k=2$)



H3DV6-SN:6138

February 21, 2012

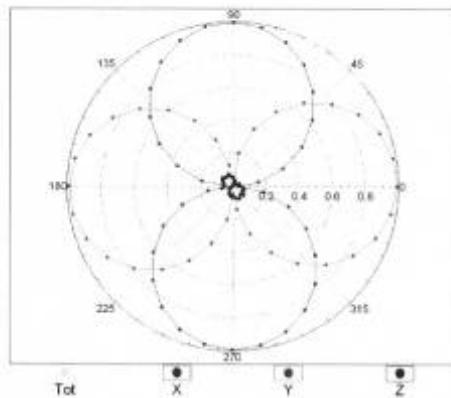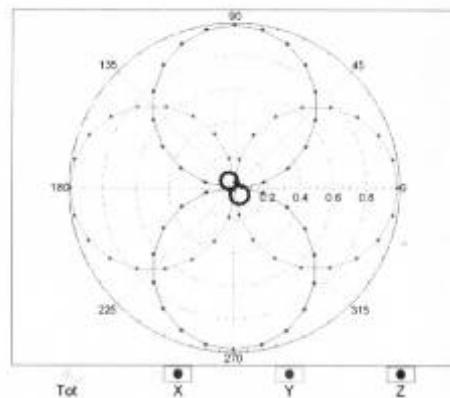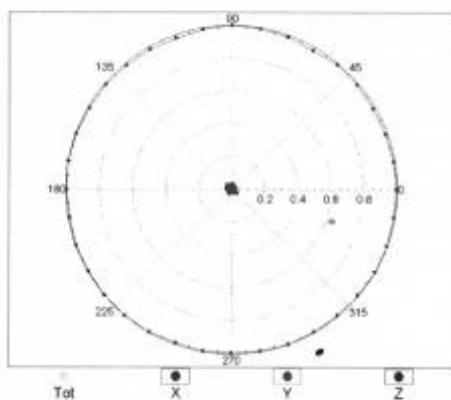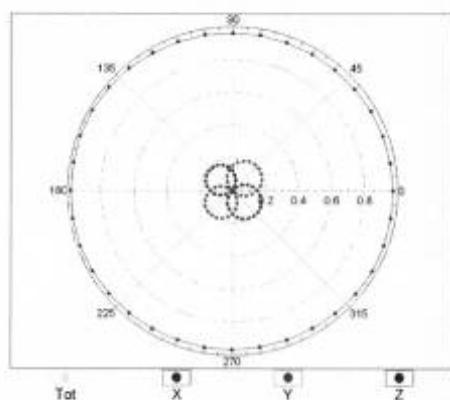Receiving Pattern (ϕ), $\theta = 0^\circ$ $f=600 \text{ MHz, TEM, } 0^\circ$  $f=2500 \text{ MHz, R22, } 0^\circ$ **Receiving Pattern (ϕ), $\theta = 90^\circ$** $f=600 \text{ MHz, TEM, } 90^\circ$  $f=2500 \text{ MHz, R22, } 90^\circ$ 



H3DV6- SN:6138

February 21, 2012

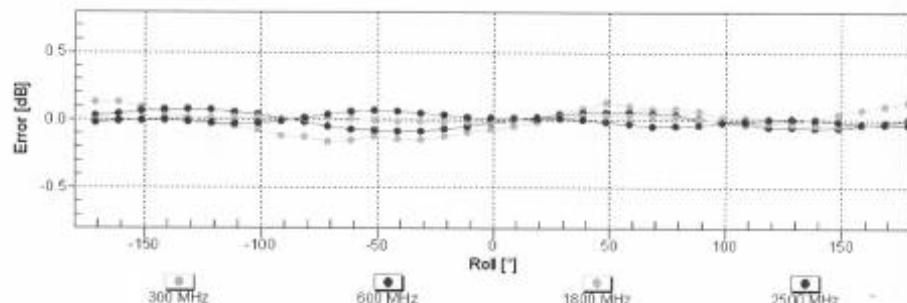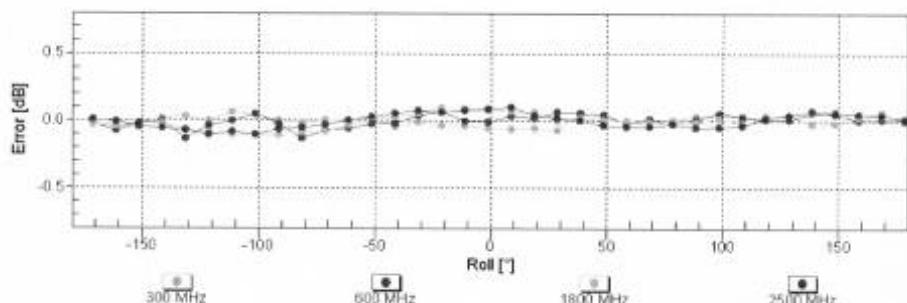Receiving Pattern (ϕ), $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)**Receiving Pattern (ϕ), $\theta = 90^\circ$** Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


H3DV6- SN:6138

February 21, 2012

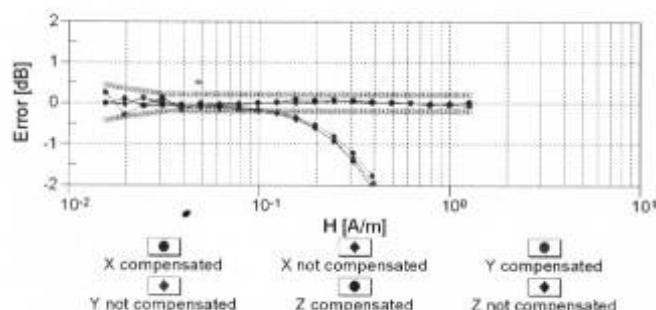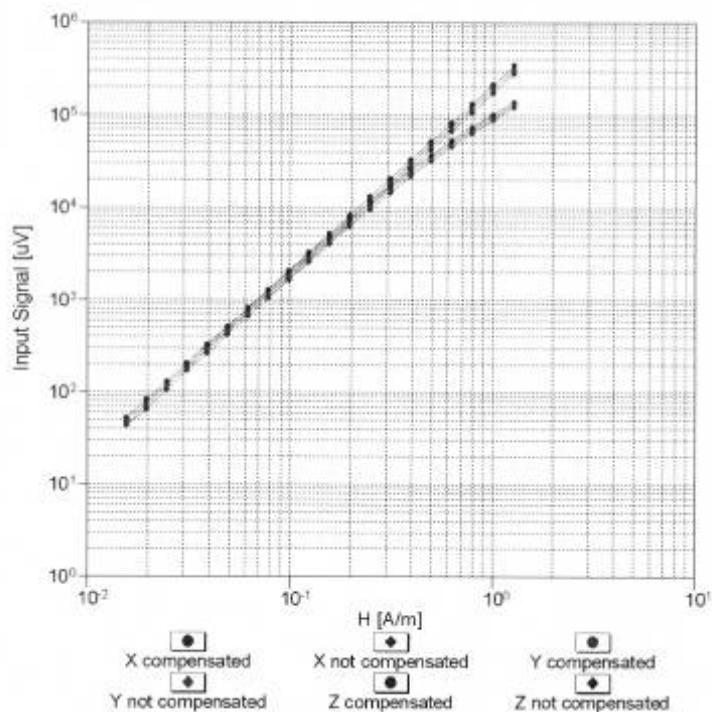Dynamic Range f(H-field)
(TEM cell, f = 900 MHz)**Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)**

H3DV6- SN:6138

February 21, 2012

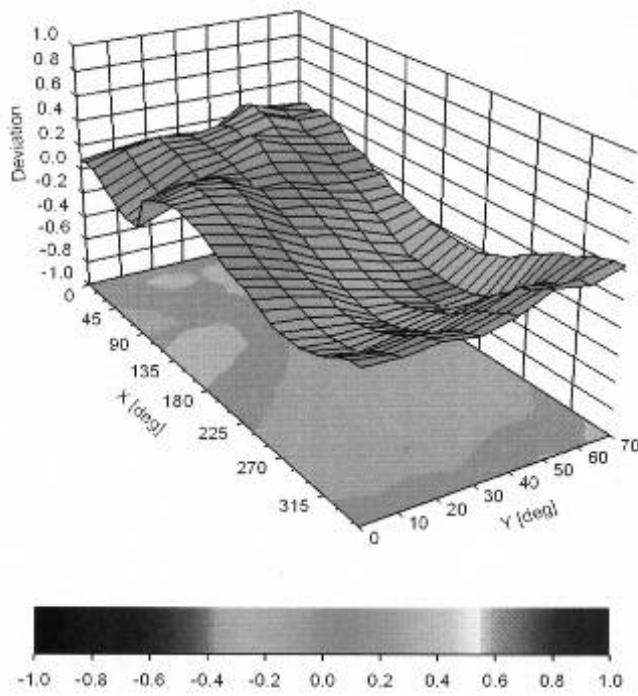Deviation from Isotropy in AirError (ϕ, θ), $f = 900$ MHzUncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

H3DV6- SN:6138

February 21, 2012

DASY/EASY - Parameters of Probe: H3DV6 - SN:6138**Other Probe Parameters**

Sensor Arrangement	Rectangular
Connector Angle (°)	168.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	20 mm
Tip Diameter	6 mm
Probe Tip to Sensor X Calibration Point	3 mm
Probe Tip to Sensor Y Calibration Point	3 mm
Probe Tip to Sensor Z Calibration Point	3 mm