

Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.562001	43.1	GND	N	9.9	12.9	56.0
2.670001	41.1	GND	N	9.9	14.9	56.0
2.890501	43.3	GND	N	9.9	12.7	56.0
2.998501	41.0	GND	N	9.9	15.0	56.0
3.057001	45.5	GND	N	9.9	10.5	56.0
3.106501	37.9	GND	N	9.9	18.1	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.639501	39.9	GND	N	9.9	6.1	46.0
2.017501	34.6	GND	N	9.9	11.4	46.0
2.454001	36.5	GND	N	9.9	9.5	46.0
2.562001	33.6	GND	N	9.9	12.4	46.0
2.998501	32.2	GND	N	9.9	13.8	46.0
3.277501	38.2	GND	N	9.9	7.8	46.0

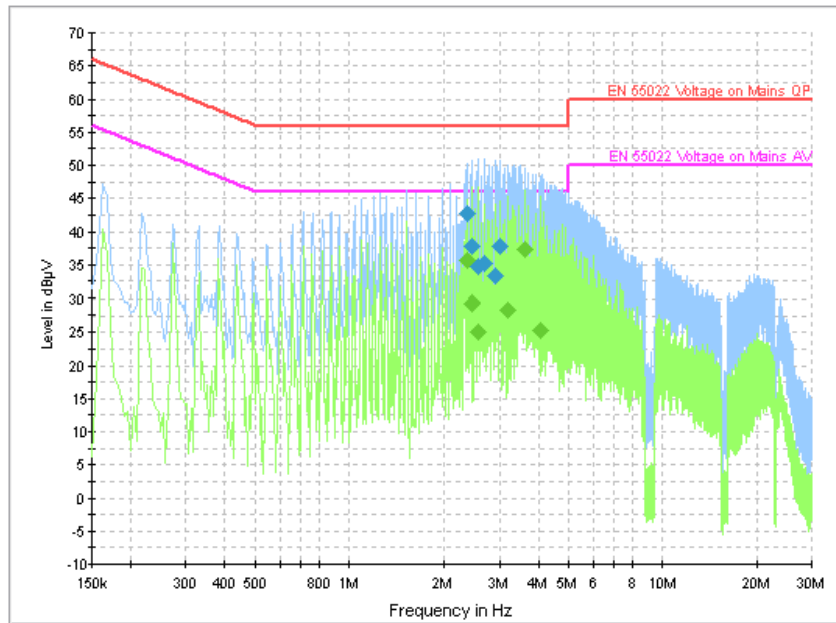


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.355001	42.7	GND	N	9.9	13.3	56.0
2.463001	37.7	GND	N	9.9	18.3	56.0
2.571001	34.8	GND	N	9.9	21.2	56.0
2.679001	35.1	GND	N	9.9	20.9	56.0
2.899501	33.3	GND	N	9.9	22.7	56.0
3.007501	37.7	GND	N	9.9	18.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.355001	35.6	GND	N	9.9	10.4	46.0
2.463001	29.3	GND	N	9.9	16.7	46.0
2.571001	25.1	GND	N	9.9	20.9	46.0
3.178501	28.5	GND	N	9.9	17.5	46.0
3.610501	37.2	GND	N	9.9	8.8	46.0
4.047001	25.3	GND	N	9.9	20.7	46.0

*** END OF REPORT BODY ***