

Regulatory WLAN Antenna Information

Antenna information											
Vendor (Manufacturer)	Type	Antenna Part number (Main)	Antenna Part number (Aux)								
INNOWAVE	PIFA	F001C8712190002	F001C8711590001								
Address of Vendor (Manufacturer)		No.2,Qianmei Road,Dongkeng Town,Dongguan City,Guangdong Province, China									
Peak gain w/ cable loss (dBi)*											
	2.4GHz <small>2400-2483.5 MHz</small>	5.2GHz <small>5150-5250MHz</small>	5.3GHz <small>5250-5350MHz</small>	5.6GHz <small>5470-5725MHz</small>	5.8GHz <small>5725-5850MHz</small>	5.9GHz <small>5850-5895MHz</small>	6.2GHz <small>5925-6425MHz</small>	6.5GHz <small>6425-6525MHz</small>	6.7GHz <small>6525-6875MHz</small>	7.0 GHz <small>6875-7125MHz</small>	
Main	2.46	3.09	2.72	2.35	3.36	3.18	3.67	3.70	3.34	3.89	
Aux	1.13	1.25	1.47	1.82	1.51	1.86	2.04	2.17	1.69	2.23	
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*										Distance to the end user (mm)
	<small>2.4GHz 2400-2483.5 MHz</small>	<small>5.2GHz 5150-5250MHz</small>	<small>5.3GHz 5250-5350MHz</small>	<small>5.6GHz 5470-5725MHz</small>	<small>5.8GHz 5725-5850MHz</small>	<small>5.9GHz 5850-5895MHz</small>	<small>6.2GHz 5925-6425MHz</small>	<small>6.5GHz 6425-6525MHz</small>	<small>6.7GHz 6525-6875MHz</small>	<small>7.0GHz 6875-7125MHz</small>	Generic: refer to modular FCC SAR report
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Mid-power: ≥ 8 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59	Low power: ≥ 5 mm
Dipole	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)											
* SAR minimum separation (mm)											
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)											
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)											
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)											
* 3D Peak Antenna gain should be equal or greater than -2 dBi											
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.											

Antenna Information

Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
P/N: F001C8712190002 Main Antenna (TX1)	INNOWAVE	PIFA	(P/N: U.FL-2LP-XXX) 50 ohm Coaxial length:300mm diameter: 1.13LL	2400-2483.5	2.46	3.19	3.0	0.73
				5150-5250	3.09	4.19	3.0	1.10
				5250-5350	2.72	3.83	3.0	1.11
				5470-5725	2.35	3.48	3.0	1.13
				5725-5850	3.36	4.51	3.0	1.15
				5850-5895	3.18	4.34	3.0	1.16
				5925-6425	3.67	4.85	3.0	1.18
				6425-6525	3.70	4.89	3.0	1.19
				6525-6875	3.34	4.54	3.0	1.20
6875-7125	3.89	5.10	3.0	1.21				
P/N: F001C8711590001 Aux Antenna (TX2)	INNOWAVE	PIFA	(P/N: U.FL-2LP-XXX) 50 ohm Coaxial length:300mm diameter:1.13LL	2400-2483.5	1.13	1.86	3.0	0.73
				5150-5250	1.25	2.35	3.0	1.10
				5250-5350	1.47	2.58	3.0	1.11
				5470-5725	1.82	2.95	3.0	1.13
				5725-5850	1.51	2.66	3.0	1.15
				5850-5895	1.86	3.02	3.0	1.16
				5925-6425	2.04	3.22	3.0	1.18
				6425-6525	2.17	3.36	3.0	1.19
				6525-6875	1.69	2.89	3.0	1.20
6875-7125	2.23	3.44	3.0	1.21				


- 3D Antenna Peak Gain required being test in system basis.

Section 2. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.46

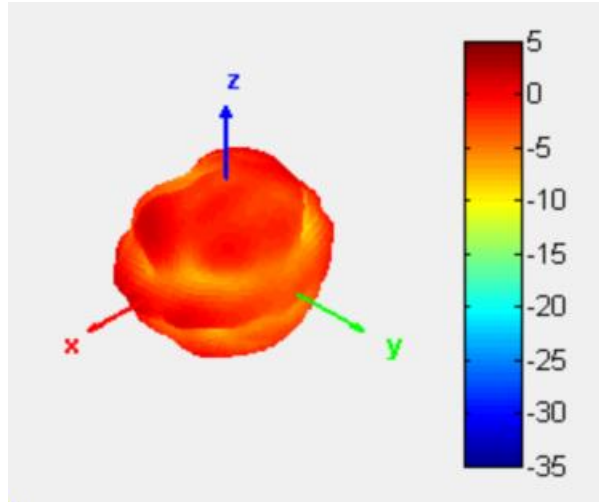


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	3.09

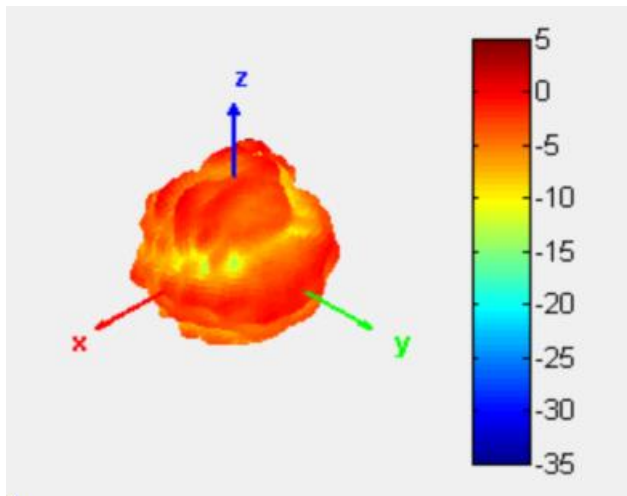


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.72

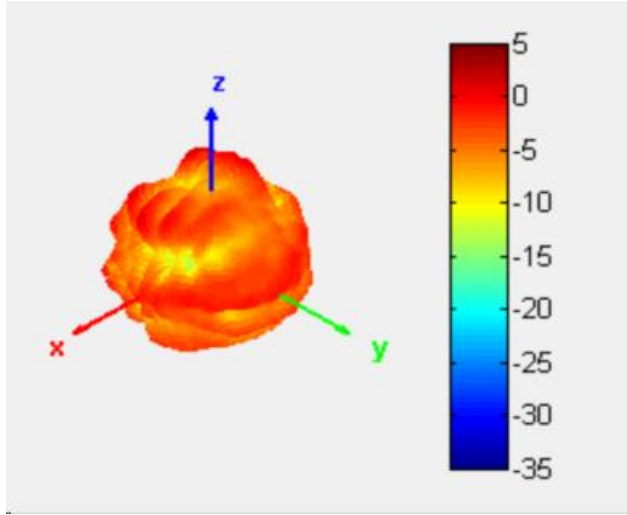


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.35

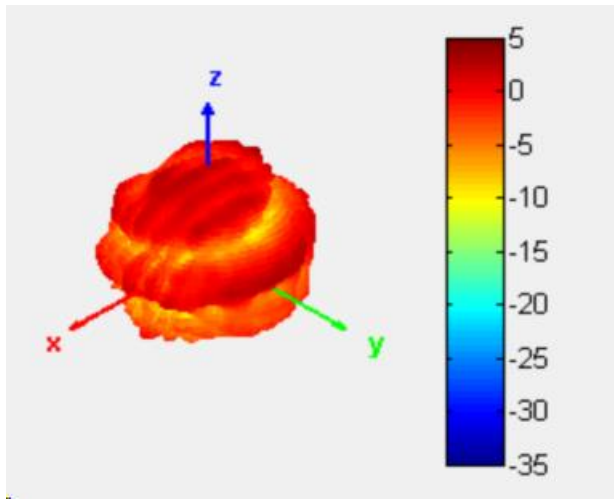


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.36

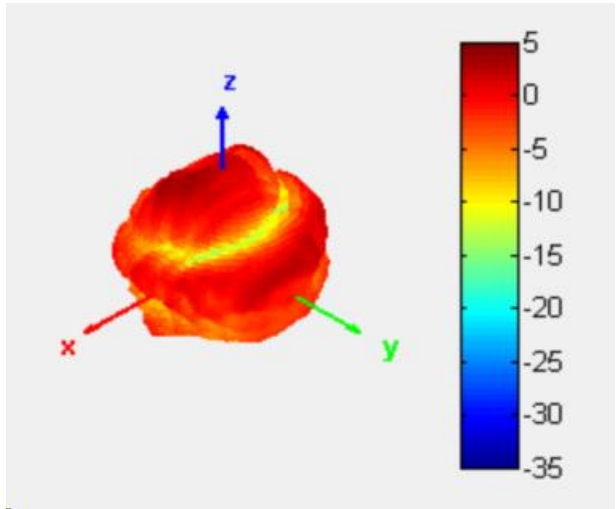


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.18

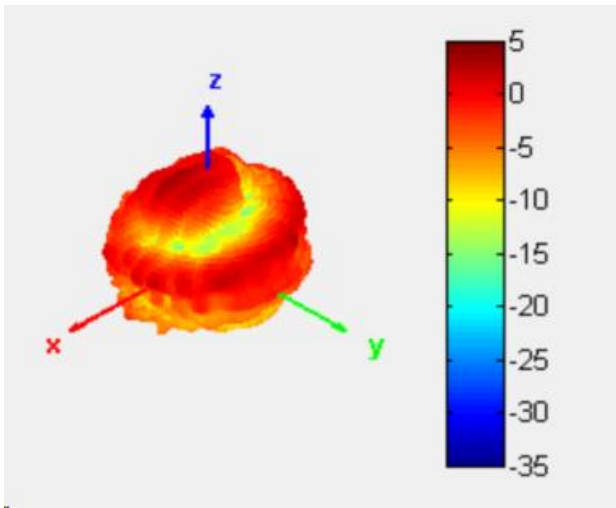


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.67

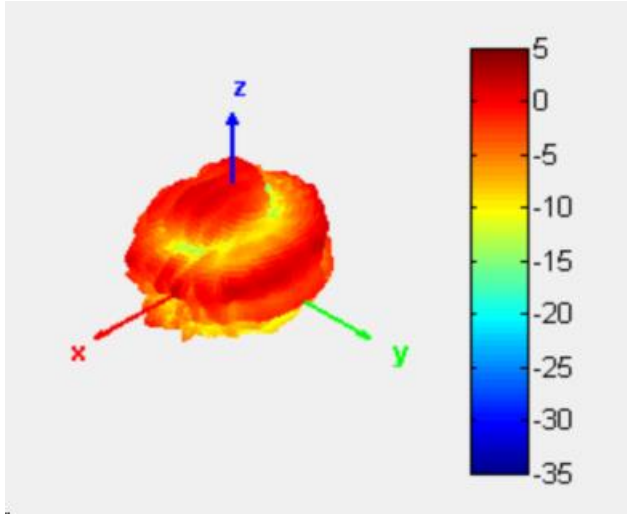


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.70

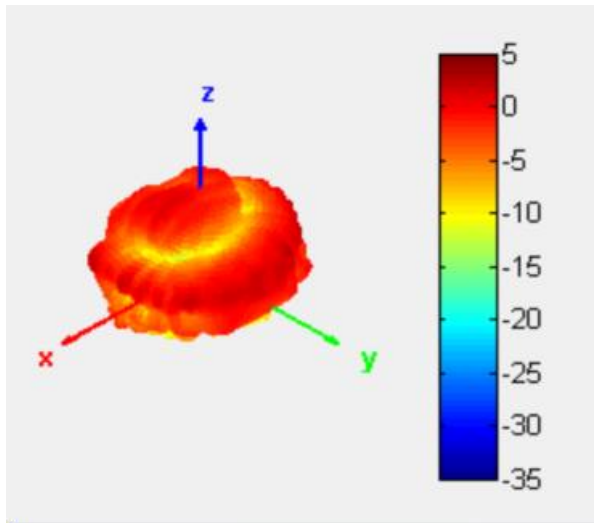


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.34

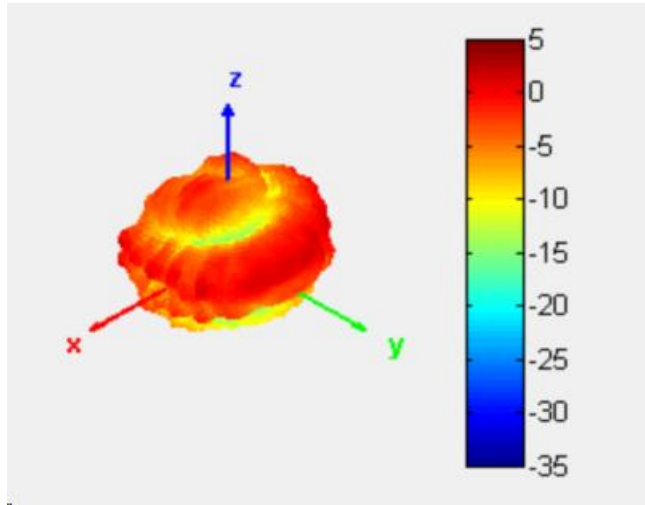

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.89

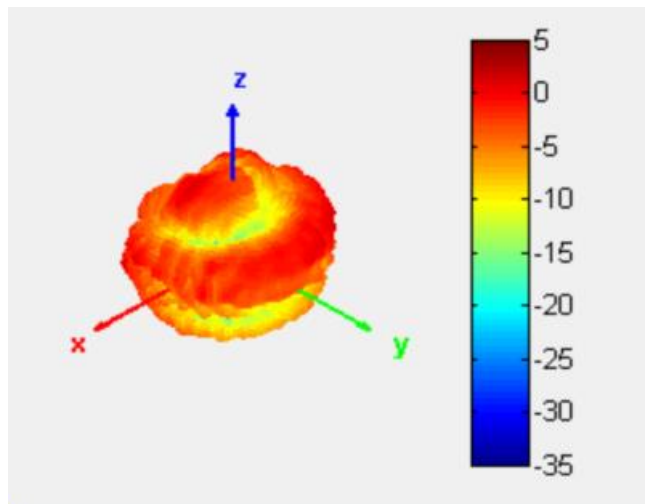

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.13

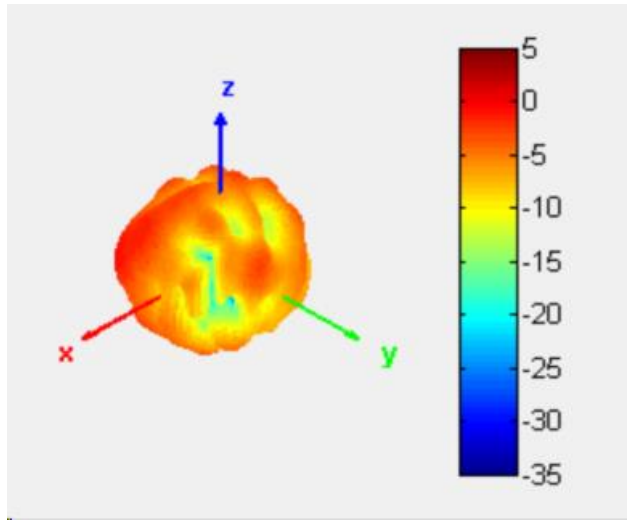


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.25

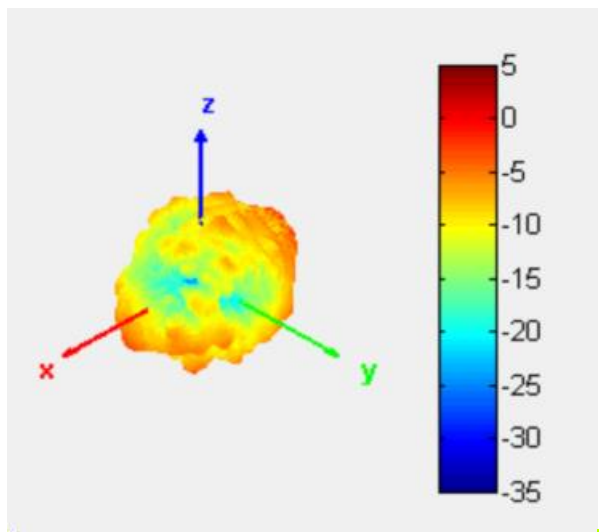


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.47

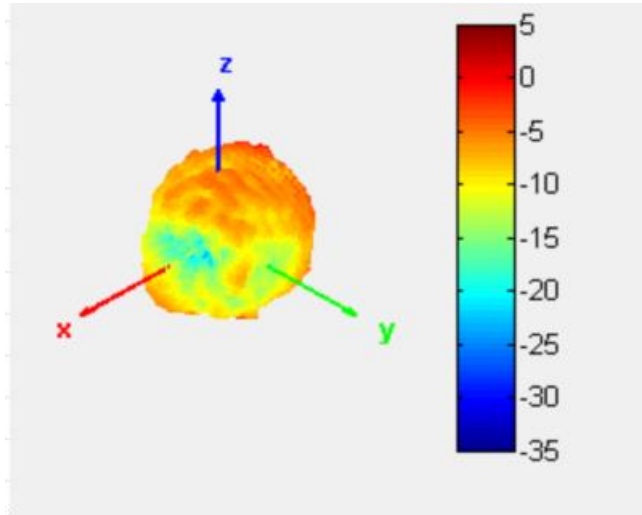


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.82

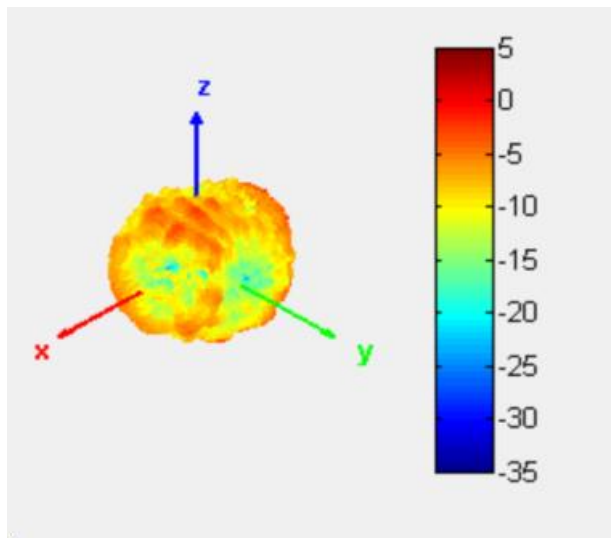


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.51

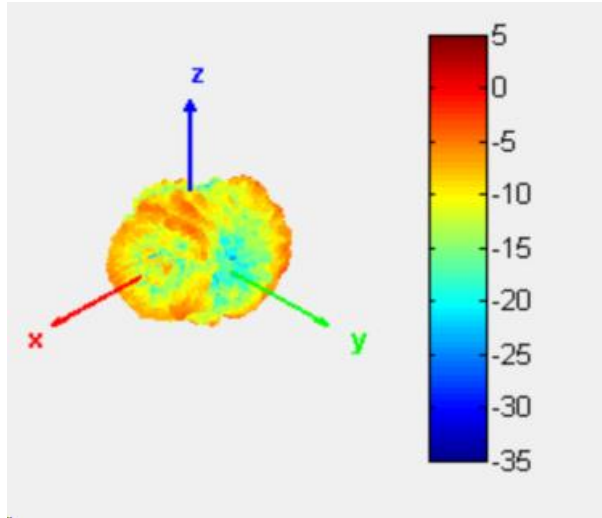


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.86

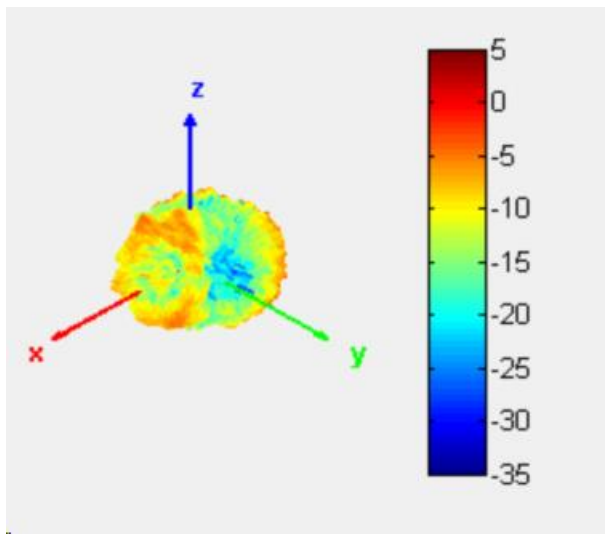


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.04

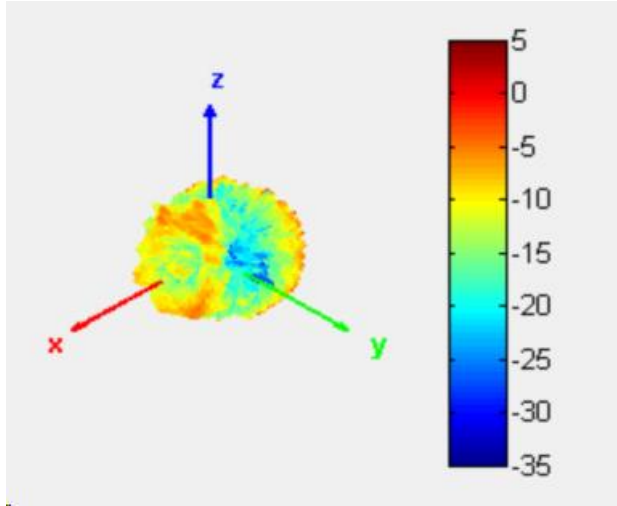


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.17

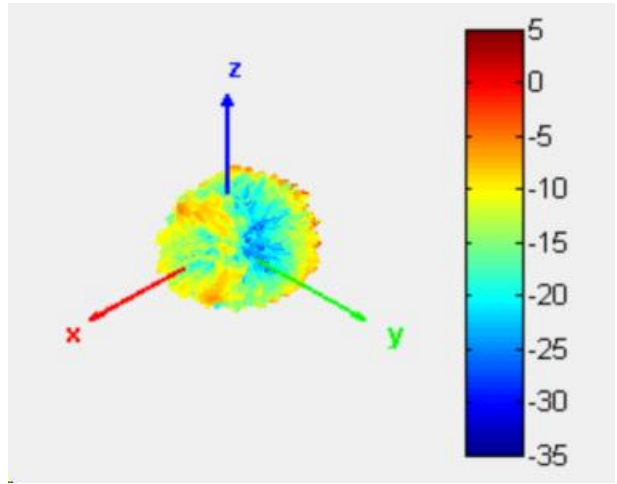

Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.69

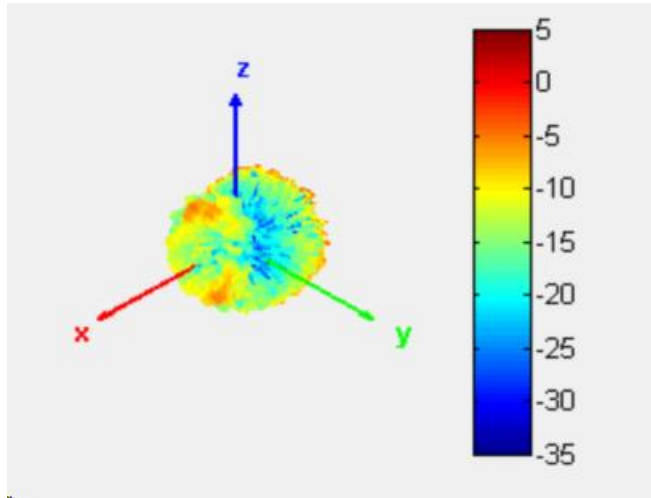

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.23

