




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-82	-14.46	0	-67.54	-62	OFF
					-84	-14.46	0	-69.54	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
	160	207	6985	6910	-82	-14.46	0	-67.54	-62	OFF
					-84	-14.46	0	-69.54	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
				6985	-80	-14.46	0	-65.54	-62	OFF
					-82	-14.46	0	-67.54	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
	7060	-82	-14.46	0	-67.54	-62	OFF			
		-84	-14.46	0	-69.54	-62	Minimal			
		-96.46	-14.46	0	-82	-62	ON			


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6910	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6985	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

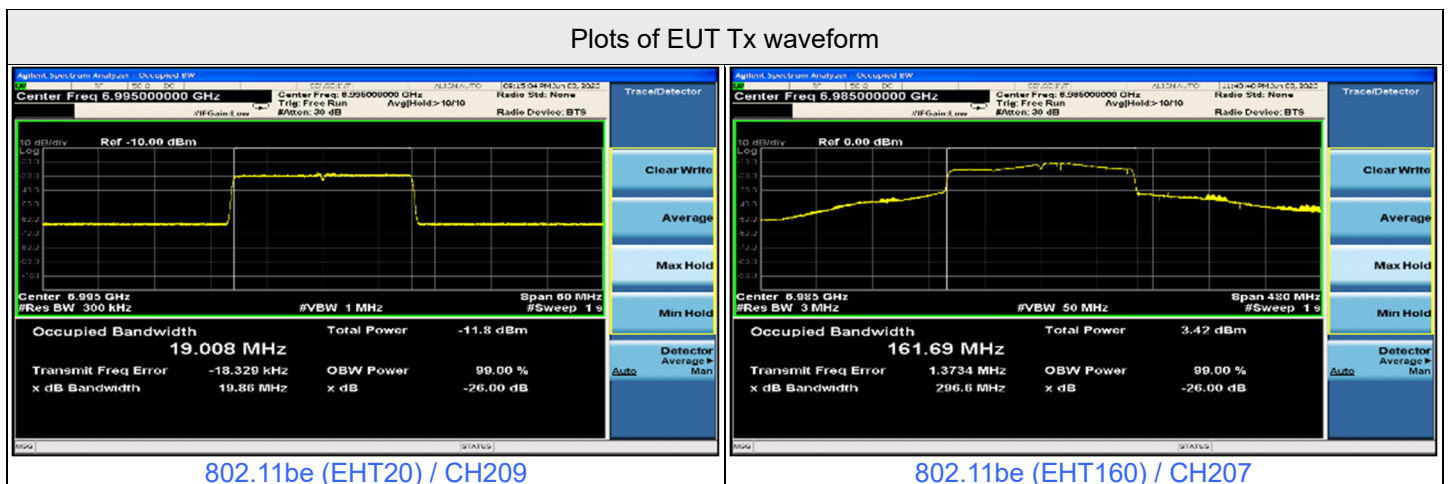


### Plots of Injected signal (AWGN) level

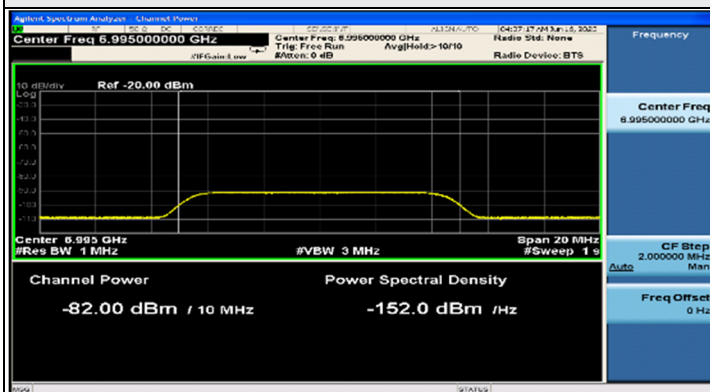


802.11be (EHT20) / CH209

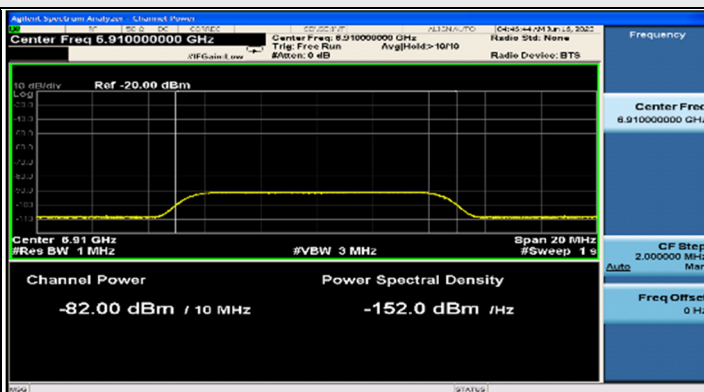

802.11be (EHT160) / CH207(Low Edge)

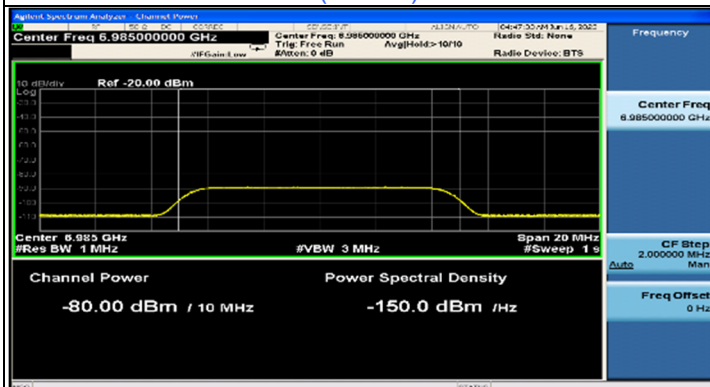


802.11be (EHT160) / CH207(Middle)

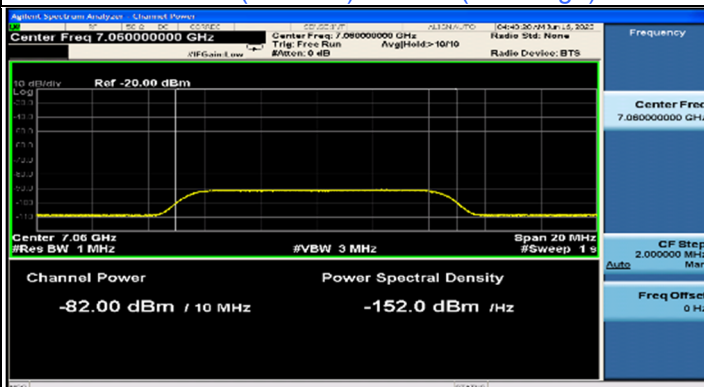


802.11be (EHT160) / CH207(High Edge)


### Plots of EUT ceased transmission in the time domain

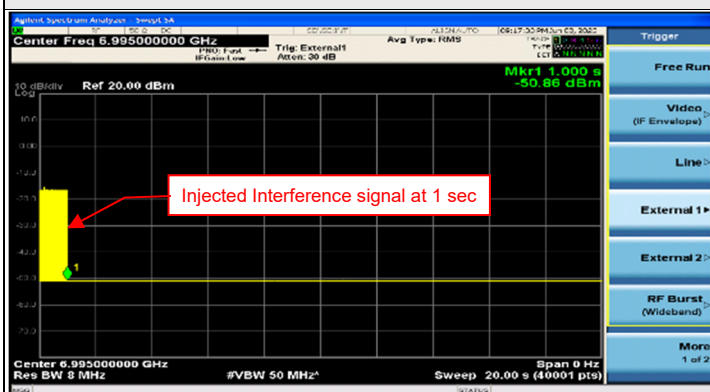


802.11be (EHT20) / CH209

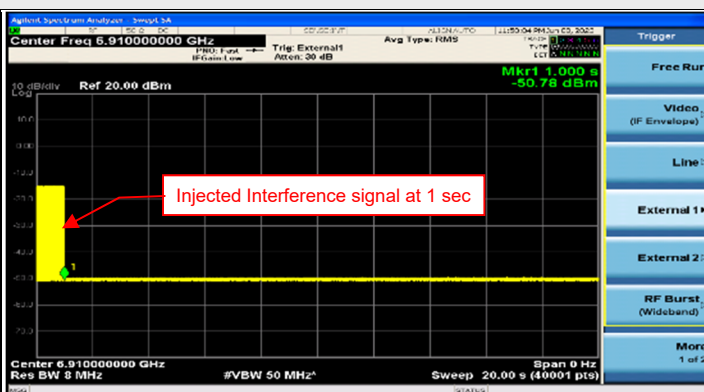

802.11be (EHT160) / CH207(Low Edge)

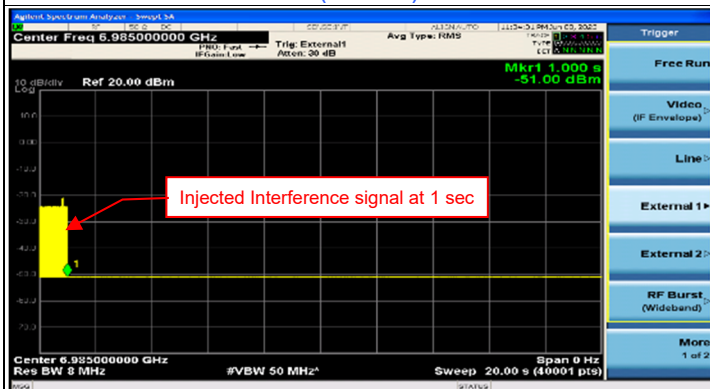

802.11be (EHT160) / CH207(Middle)

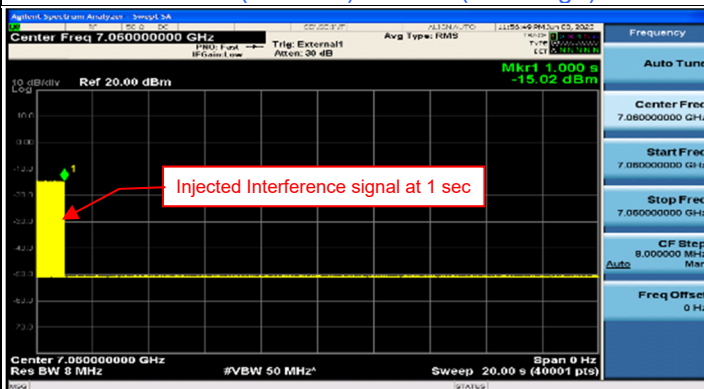

802.11be (EHT160) / CH207(High Edge)

## 7.8 AC Power Conducted Emissions


### Indoor Client

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Tom Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15250	9.94	48.75	32.91	58.69	42.85	65.86	55.86	-7.17	-13.01
2	0.24766	9.94	34.04	14.90	43.98	24.84	61.84	51.84	-17.86	-27.00
3	0.47422	9.95	17.45	0.11	27.40	10.06	56.44	46.44	-29.04	-36.38
4	3.45703	10.11	23.13	16.15	33.24	26.26	56.00	46.00	-22.76	-19.74
5	7.34375	10.32	13.83	8.48	24.15	18.80	60.00	50.00	-35.85	-31.20
6	21.78906	11.04	21.27	15.95	32.31	26.99	60.00	50.00	-27.69	-23.01

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

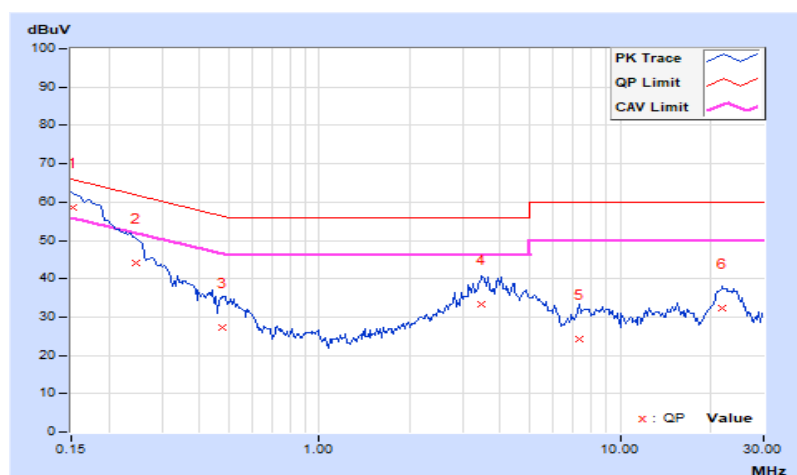


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Tom Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.99	48.69	27.02	58.68	37.01	66.00	56.00	-7.32	-18.99
2	0.22812	9.99	39.69	21.97	49.68	31.96	62.52	52.52	-12.84	-20.56
3	0.47422	10.00	14.96	3.28	24.96	13.28	56.44	46.44	-31.48	-33.16
4	3.46094	10.15	23.09	15.81	33.24	25.96	56.00	46.00	-22.76	-20.04
5	7.77734	10.34	13.90	8.77	24.24	19.11	60.00	50.00	-35.76	-30.89
6	15.44922	10.63	15.05	6.92	25.68	17.55	60.00	50.00	-34.32	-32.45

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

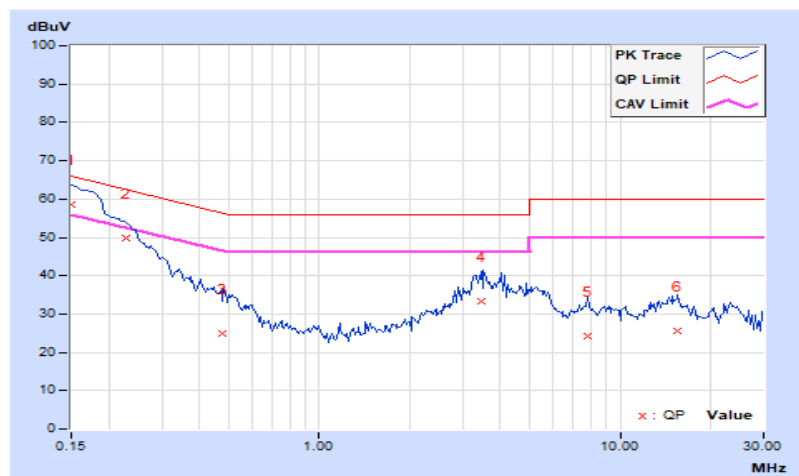


### Standard Power Client

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	27°C, 67% RH
<b>Tested By</b>	Tom Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.94	47.18	29.43	57.12	39.37	65.79	55.79	-8.67	-16.42
2	0.27891	9.94	27.90	7.28	37.84	17.22	60.85	50.85	-23.01	-33.63
3	0.50938	9.96	16.96	3.51	26.92	13.47	56.00	46.00	-29.08	-32.53
4	3.19531	10.09	22.81	15.65	32.90	25.74	56.00	46.00	-23.10	-20.26
5	7.69531	10.34	13.77	8.72	24.11	19.06	60.00	50.00	-35.89	-30.94
6	22.54297	11.07	21.22	15.98	32.29	27.05	60.00	50.00	-27.71	-22.95

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

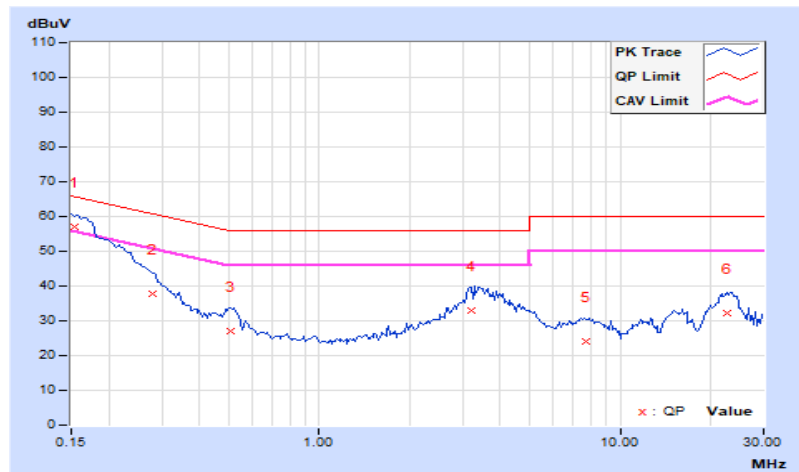


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	27°C, 67% RH
<b>Tested By</b>	Tom Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.99	47.18	29.43	57.17	39.42	65.79	55.79	-8.62	-16.37
2	0.27891	9.99	27.90	7.28	37.89	17.27	60.85	50.85	-22.96	-33.58
3	0.50938	10.01	16.96	3.51	26.97	13.52	56.00	46.00	-29.03	-32.48
4	3.19531	10.13	22.81	15.65	32.94	25.78	56.00	46.00	-23.06	-20.22
5	7.69531	10.34	13.77	8.72	24.11	19.06	60.00	50.00	-35.89	-30.94
6	22.54297	10.83	21.22	15.98	32.05	26.81	60.00	50.00	-27.95	-23.19

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

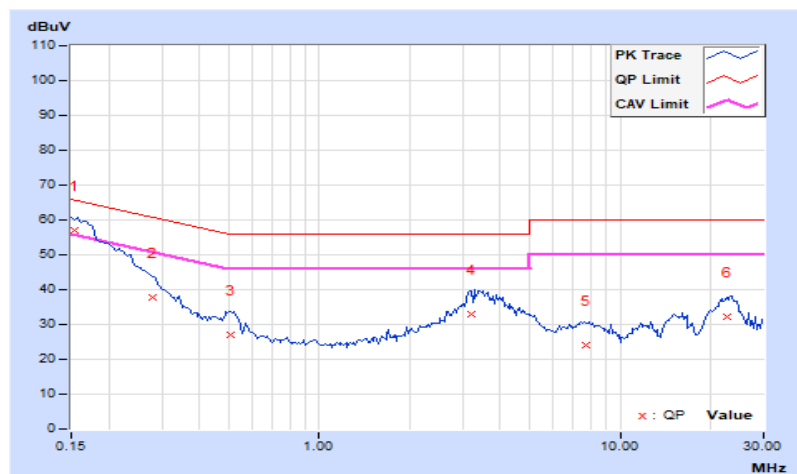

## 7.9 Unwanted Emissions below 1 GHz

### Radiated versus Conducted Measurement

#### For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

#### For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

### Conducted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.
- b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB)
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal  
For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.  
For the band edge the gain for the specific band may have been used.

#### Notes:


1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:  
For f = 30 – 1000 MHz, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.

**Mode A\_Indoor Client**  
**802.11be (EHT160) - Channel 111**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	61.28	34.07	40	-5.93	-69.51	-68.76	4.92	-61.19
2	135.73	34.65	43.5	-8.85	-70.27	-67.31	4.92	-60.61
3	389.38	34.65	46	-11.35	-68.67	-68.42	4.92	-60.61
4	585.93	35.51	46	-10.49	-67.64	-67.73	4.92	-59.75
5	758.34	36.55	46	-9.45	-66.2	-67.14	4.92	-58.71
6	841.89	36.44	46	-9.56	-65.28	-68.98	4.92	-58.82

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

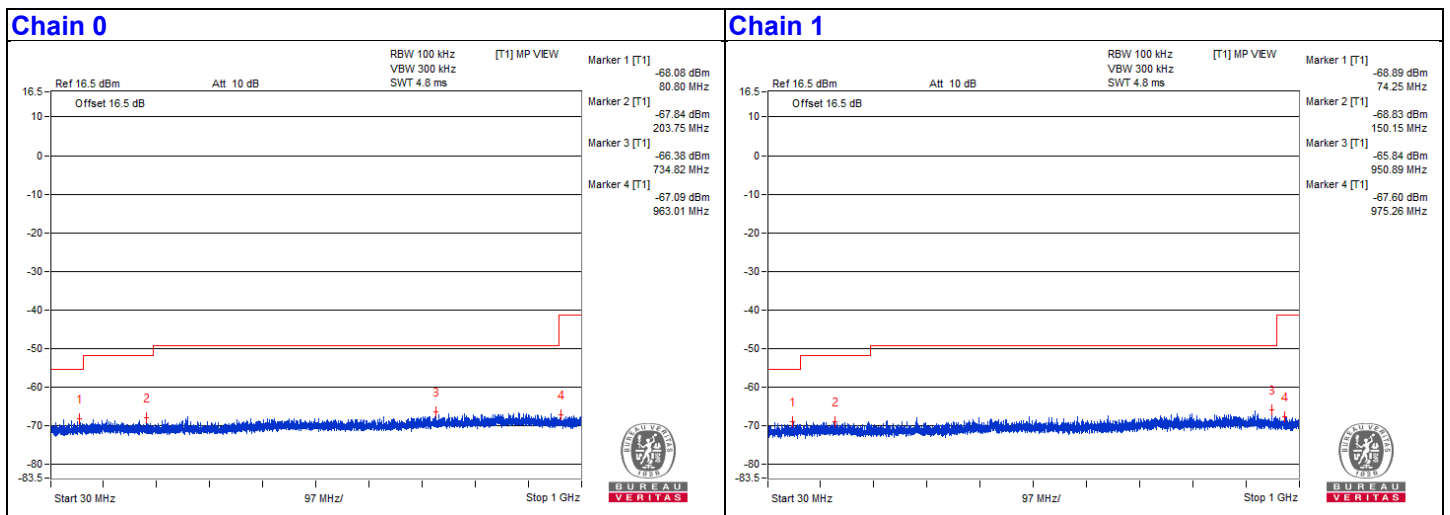




**Mode A\_Standard Power Client**  
**802.11be (EHT160) - Channel 47**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	67.58	34.53	40	-5.47	-70.23	-67.51	4.92	-60.73
2	120.69	35.13	43.5	-8.37	-68.11	-68.01	4.92	-60.13
3	389.62	34.89	46	-11.11	-68.81	-67.84	4.92	-60.37
4	428.67	35.61	46	-10.39	-67.45	-67.72	4.92	-59.65
5	730.82	36.25	46	-9.75	-66.5	-67.44	4.92	-59.01
6	900.93	36.57	46	-9.43	-66.57	-66.67	4.92	-58.69

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

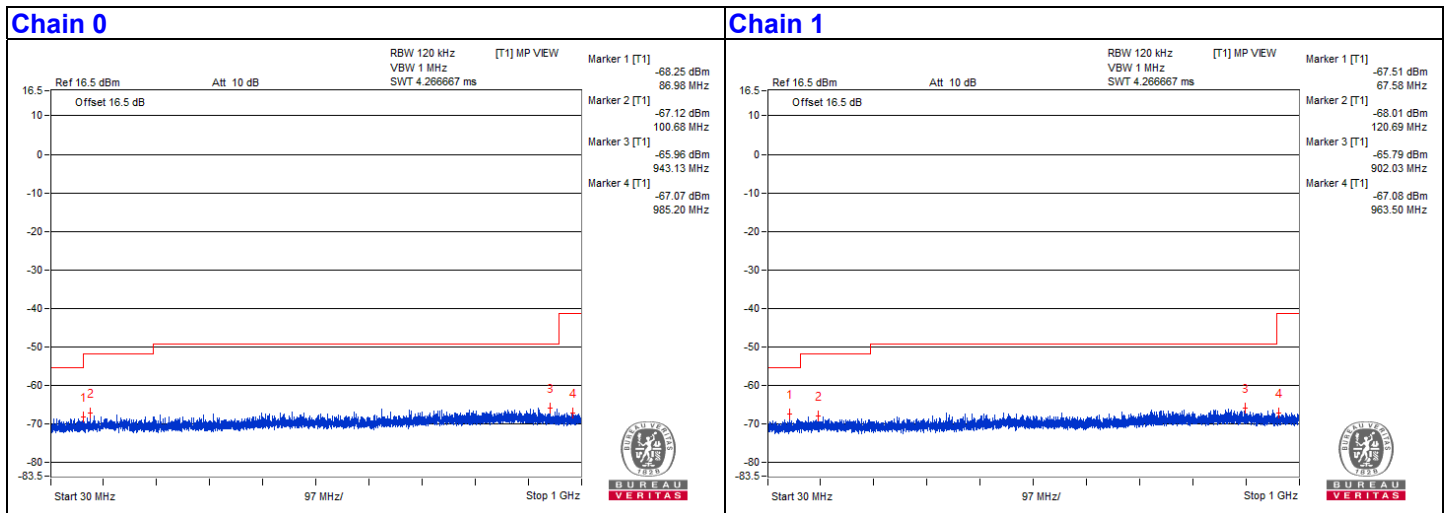


## Mode B\_Indoor Client

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.96	36.6 QP	43.5	-6.9	2.00 H	324	53.9	-17.3
2	217.48	37.1 QP	46.0	-8.9	1.50 H	209	53.7	-16.6
3	233.24	40.3 QP	46.0	-5.7	1.50 H	229	55.7	-15.4
<b>4</b>	<b>299.30</b>	<b>45.5 QP</b>	<b>46.0</b>	<b>-0.5</b>	<b>1.00 H</b>	<b>216</b>	<b>58.1</b>	<b>-12.6</b>
5	699.76	41.4 QP	46.0	-4.6	1.50 H	39	45.4	-4.0
6	799.62	42.9 QP	46.0	-3.1	1.00 H	360	45.4	-2.5

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

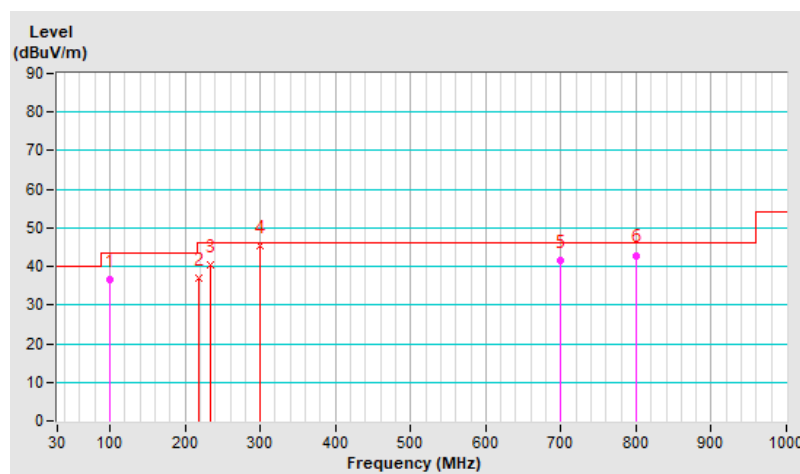


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.71	21.8 QP	40.0	-18.2	1.00 V	176	35.3	-13.5
2	107.09	28.4 QP	43.5	-15.1	1.00 V	360	44.6	-16.2
3	240.00	35.9 QP	46.0	-10.1	2.00 V	296	50.6	-14.7
4	298.81	39.1 QP	46.0	-6.9	3.00 V	294	51.7	-12.6
5	431.97	29.2 QP	46.0	-16.8	2.00 V	305	38.0	-8.8
6	699.74	36.8 QP	46.0	-9.2	2.00 V	270	40.8	-4.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

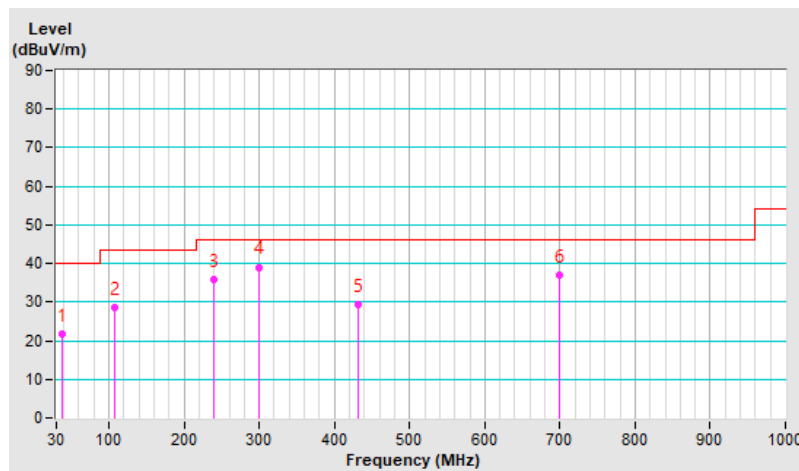

## Mode B\_Standard Power Client


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.94	32.2 QP	43.5	-11.3	3.00 H	2	49.6	-17.4
2	144.02	33.1 QP	43.5	-10.4	2.00 H	181	46.3	-13.2
3	240.00	42.6 QP	46.0	-3.4	1.50 H	360	57.3	-14.7
4	299.33	44.3 QP	46.0	-1.7	1.00 H	204	56.9	-12.6
5	697.02	43.0 QP	46.0	-3.0	1.50 H	44	47.0	-4.0
6	896.21	35.5 QP	46.0	-10.5	1.50 H	250	36.7	-1.2

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

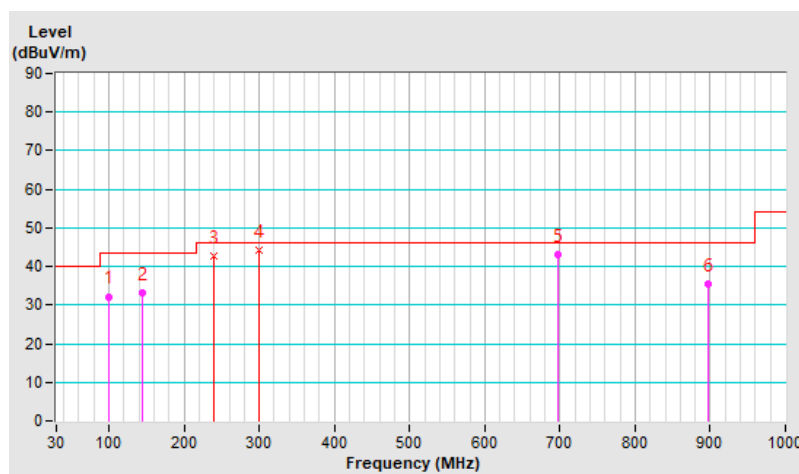


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	22.5 QP	40.0	-17.5	1.00 V	345	36.0	-13.5
2	99.62	29.0 QP	43.5	-14.5	1.00 V	218	46.4	-17.4
3	237.80	35.2 QP	46.0	-10.8	1.50 V	290	50.1	-14.9
4	298.76	40.3 QP	46.0	-5.7	1.00 V	289	52.9	-12.6
5	336.01	31.8 QP	46.0	-14.2	3.00 V	273	43.4	-11.6
6	697.07	38.9 QP	46.0	-7.1	1.50 V	252	42.9	-4.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

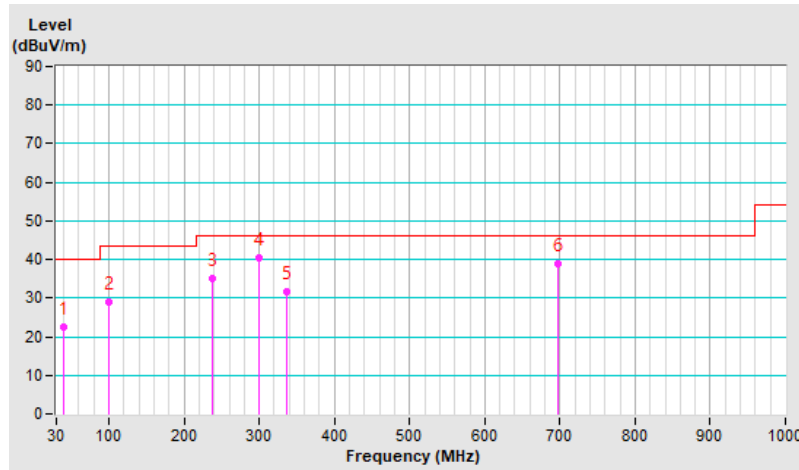

## 7.10 Unwanted Emissions above 1 GHz

### Radiated versus Conducted Measurement

#### For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

#### For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

### Conducted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.
- b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB)
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal  
For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.  
For the band edge the gain for the specific band may have been used.

Notes: The conducted emission test was considered some factor to compute test result.

Mode A\_Indoor Client


1TX  
802.11a - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38851.25	51.98 PK	74	-22.02	-48.2	4.92	-43.28
2	38836.87	40.6 AV	54	-13.4	-59.58	4.92	-54.66



Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

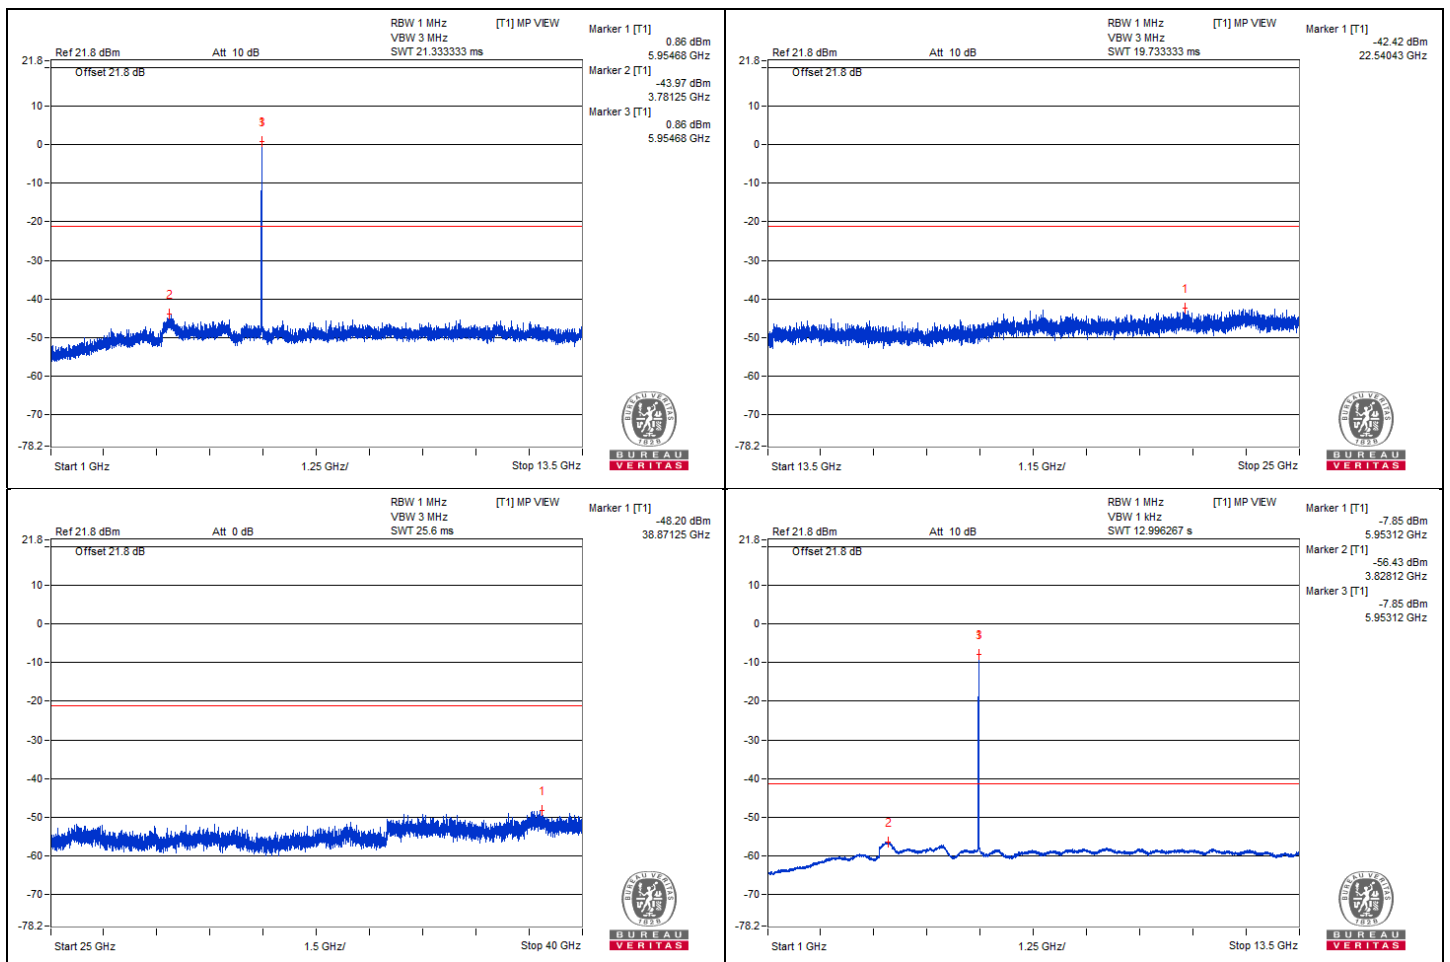



BUREAU  
VERITAS

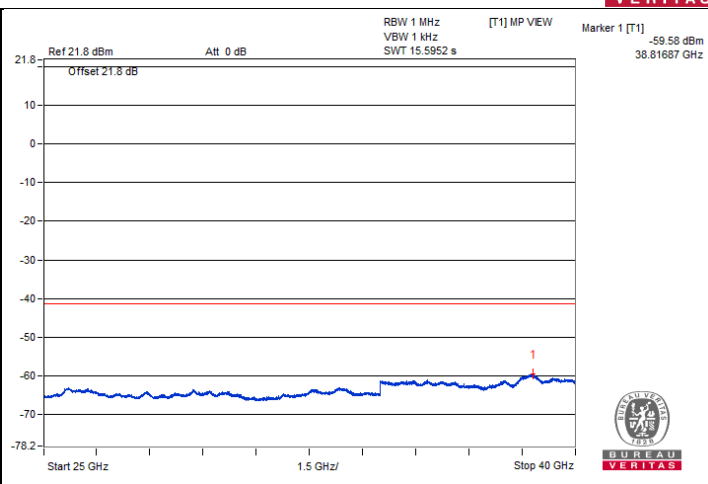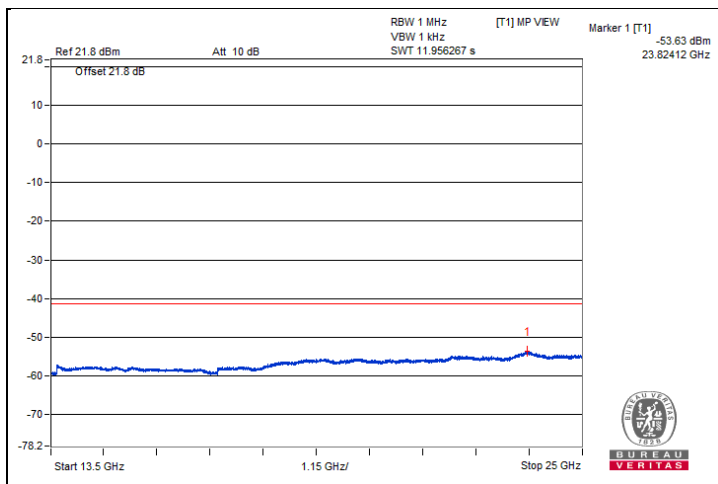




**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5829.17	64.34 PK	88.2	-23.86	-35.68	4.76	-30.92
2	#5922.65	51.86 AV	68.2	-16.34	-48.16	4.76	-43.40

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

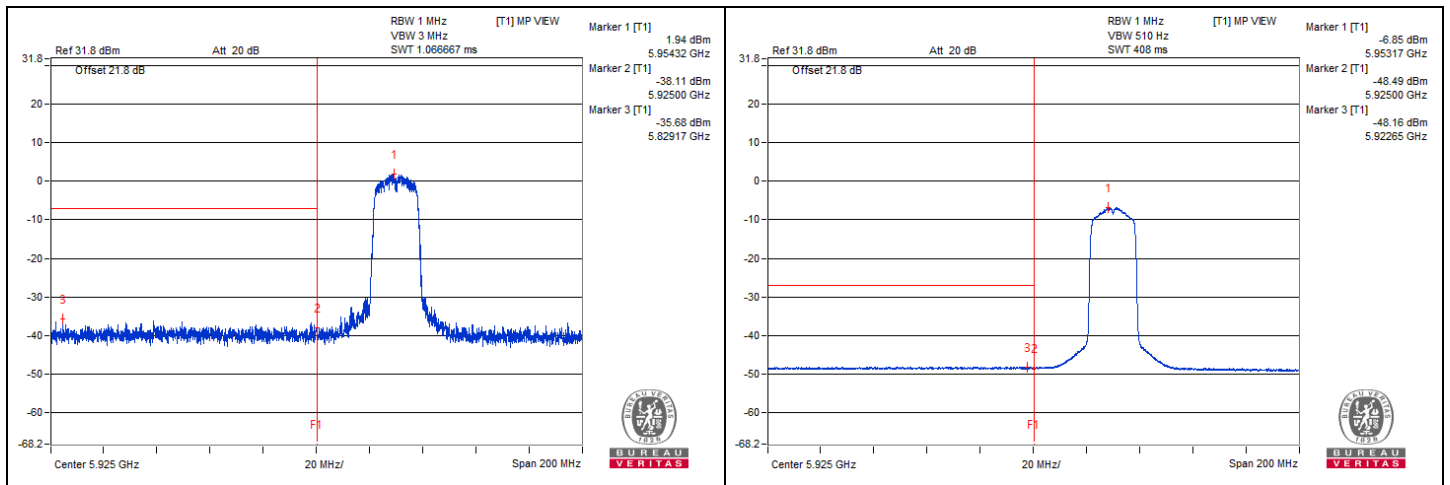


**802.11a - Channel 45**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38831.87	51.71 PK	74	-22.29	-48.47	4.92	-43.55
2	38813.75	40.68 AV	54	-13.32	-59.5	4.92	-54.58

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

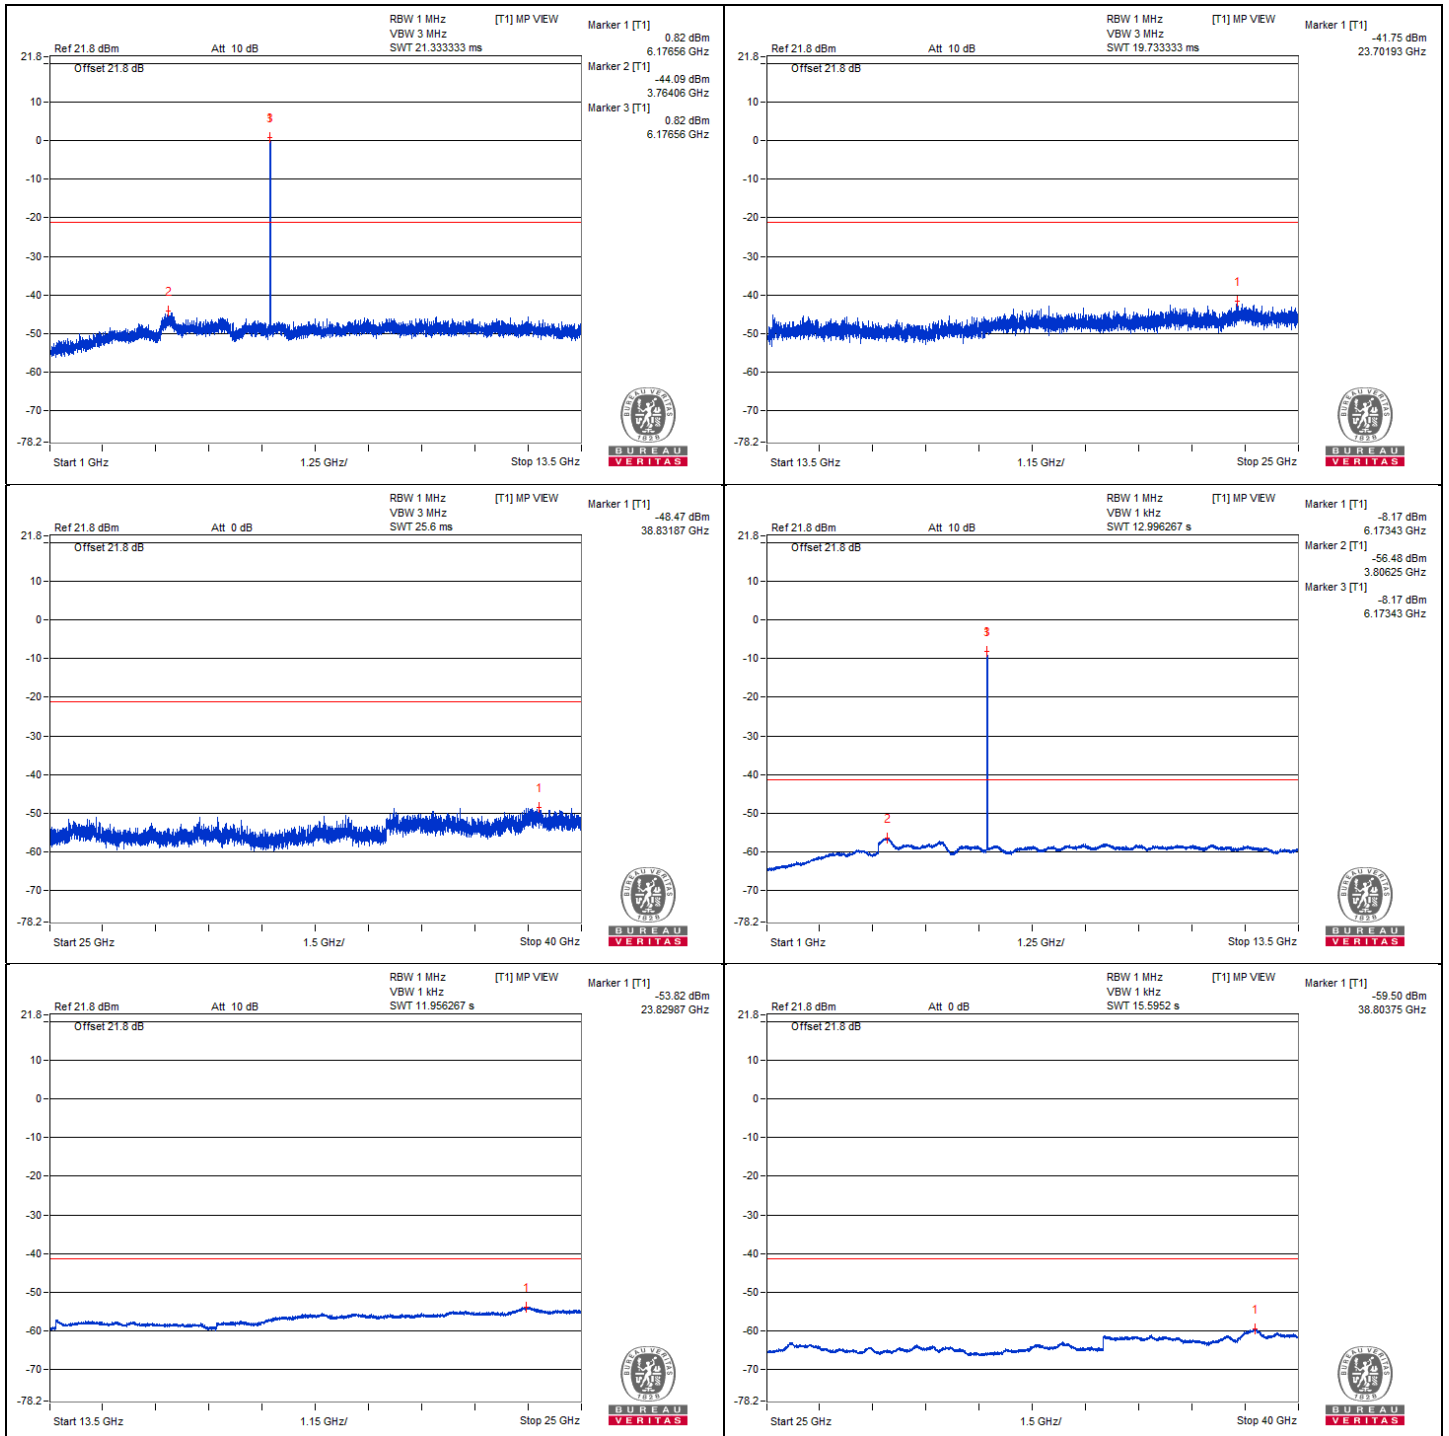


**802.11a - Channel 93**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38731.3	51.75 PK	74	-22.25	-48.43	4.92	-43.51
2	38743.75	40.53 AV	54	-13.47	-59.65	4.92	-54.73

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

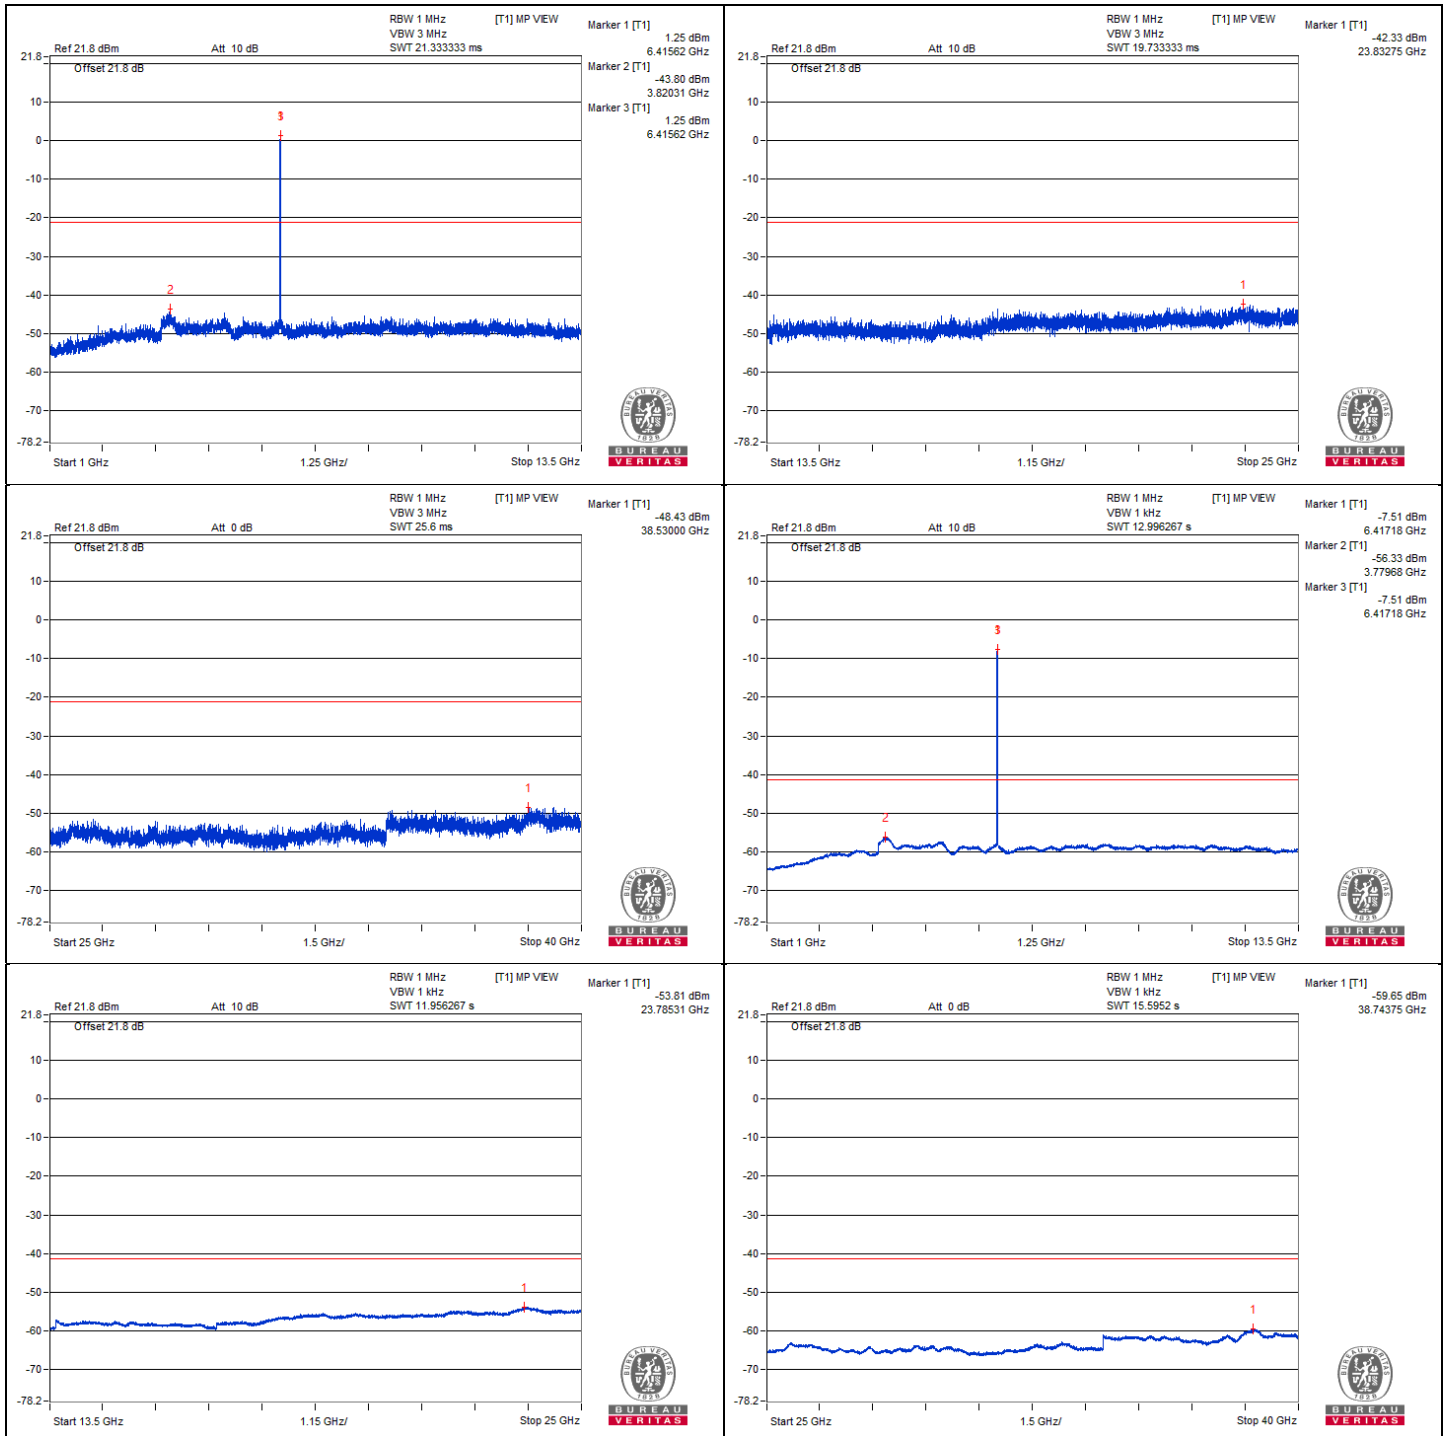


802.11a - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38855.62	52.28 PK	74	-21.72	-47.9	4.92	-42.98
2	38843.12	40.6 AV	54	-13.4	-59.58	4.92	-54.66

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

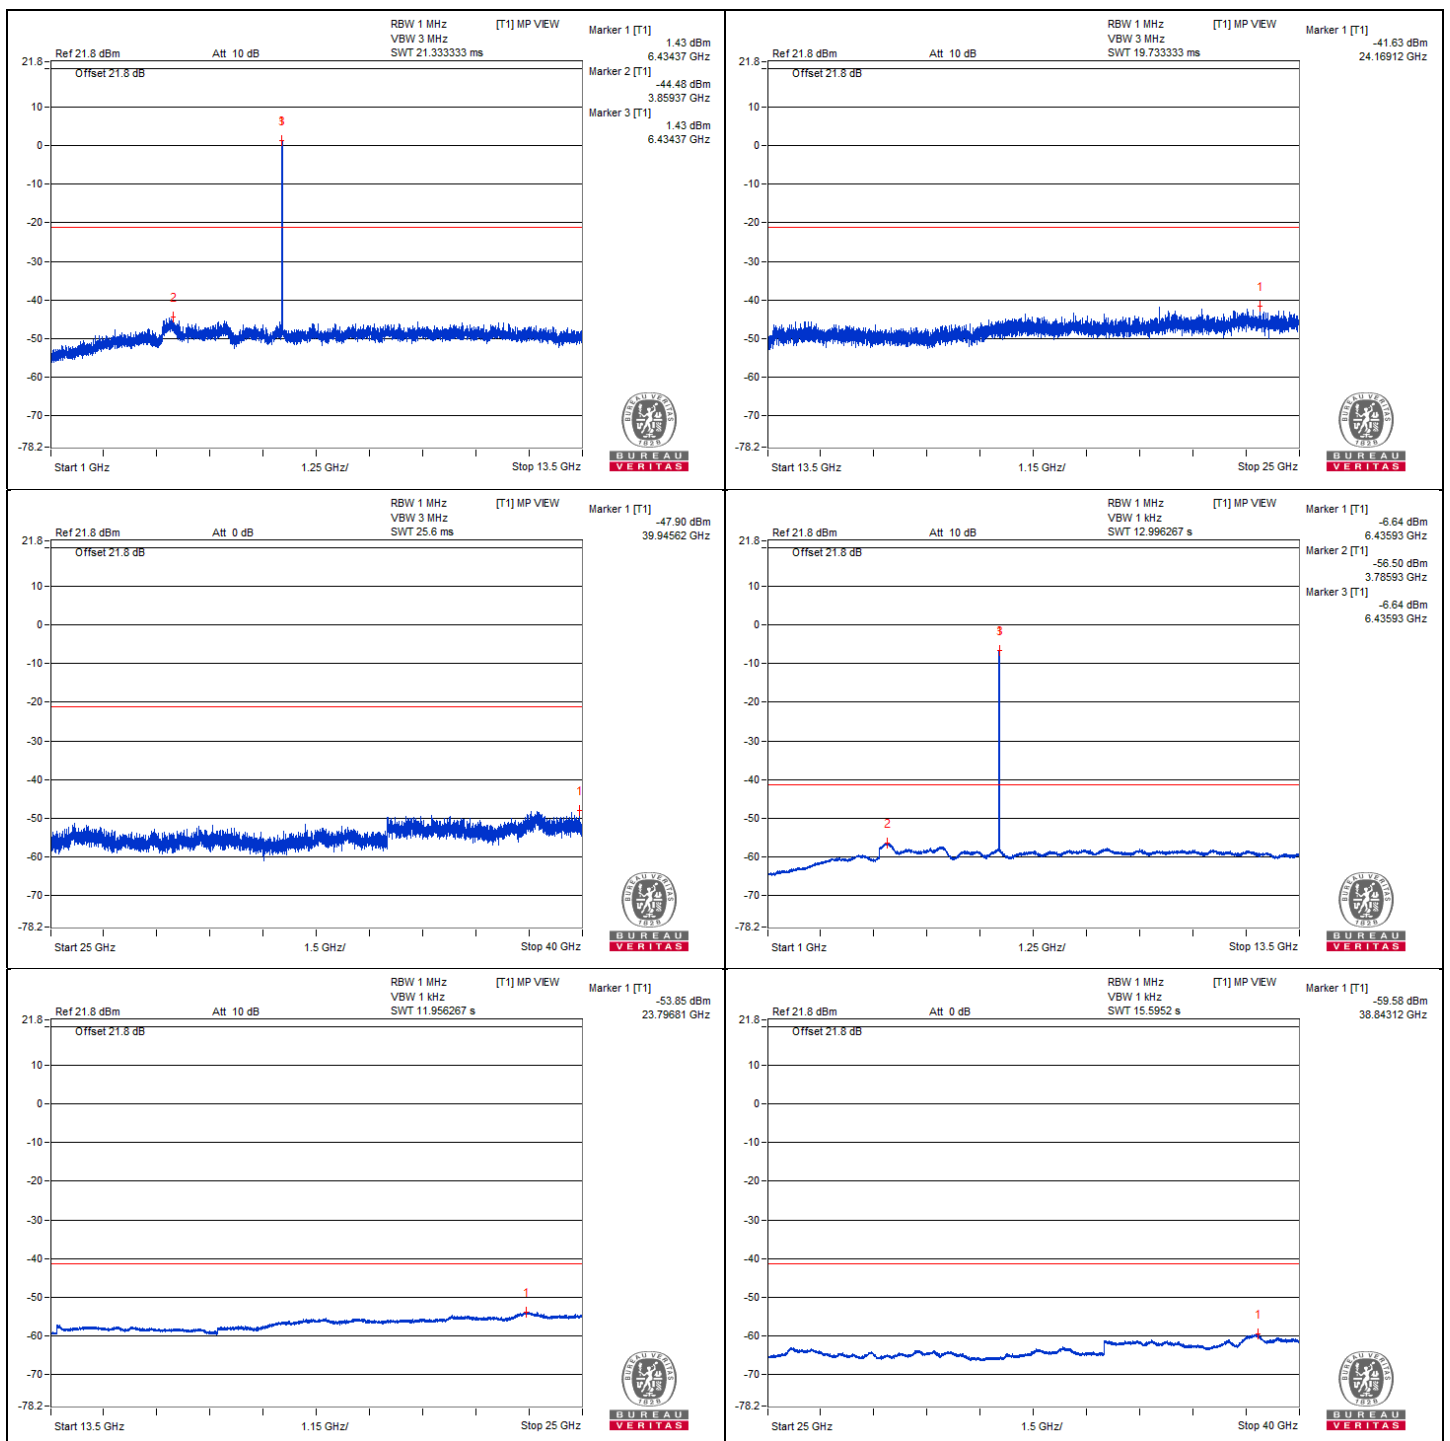




802.11a - Channel 105

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38847.5	51.78 PK	74	-22.22	-48.4	4.92	-43.48
2	38833.75	40.51 AV	54	-13.49	-59.67	4.92	-54.75

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

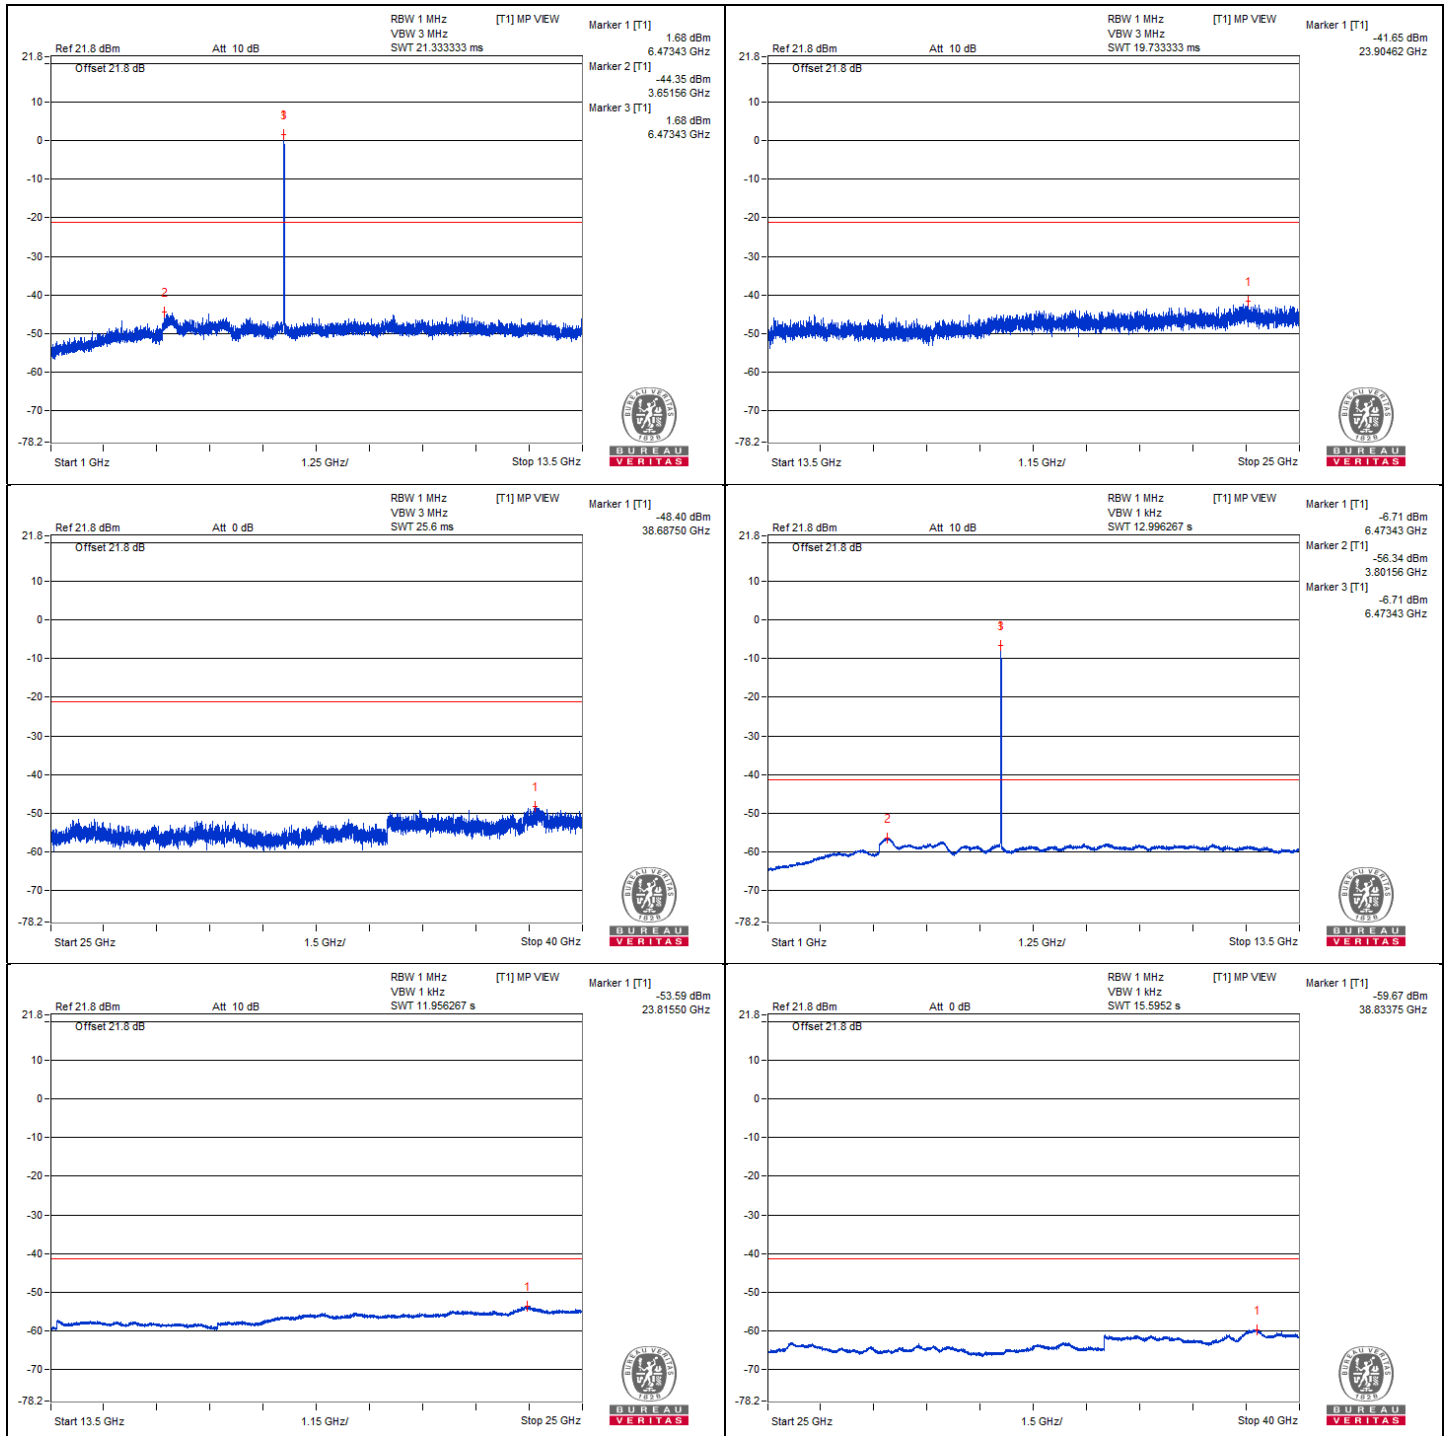




### 802.11a - Channel 113

### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38815	52.36 PK	74	-21.64	-47.82	4.92	-42.90
2	38798.12	40.75 AV	54	-13.25	-59.43	4.92	-54.51

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

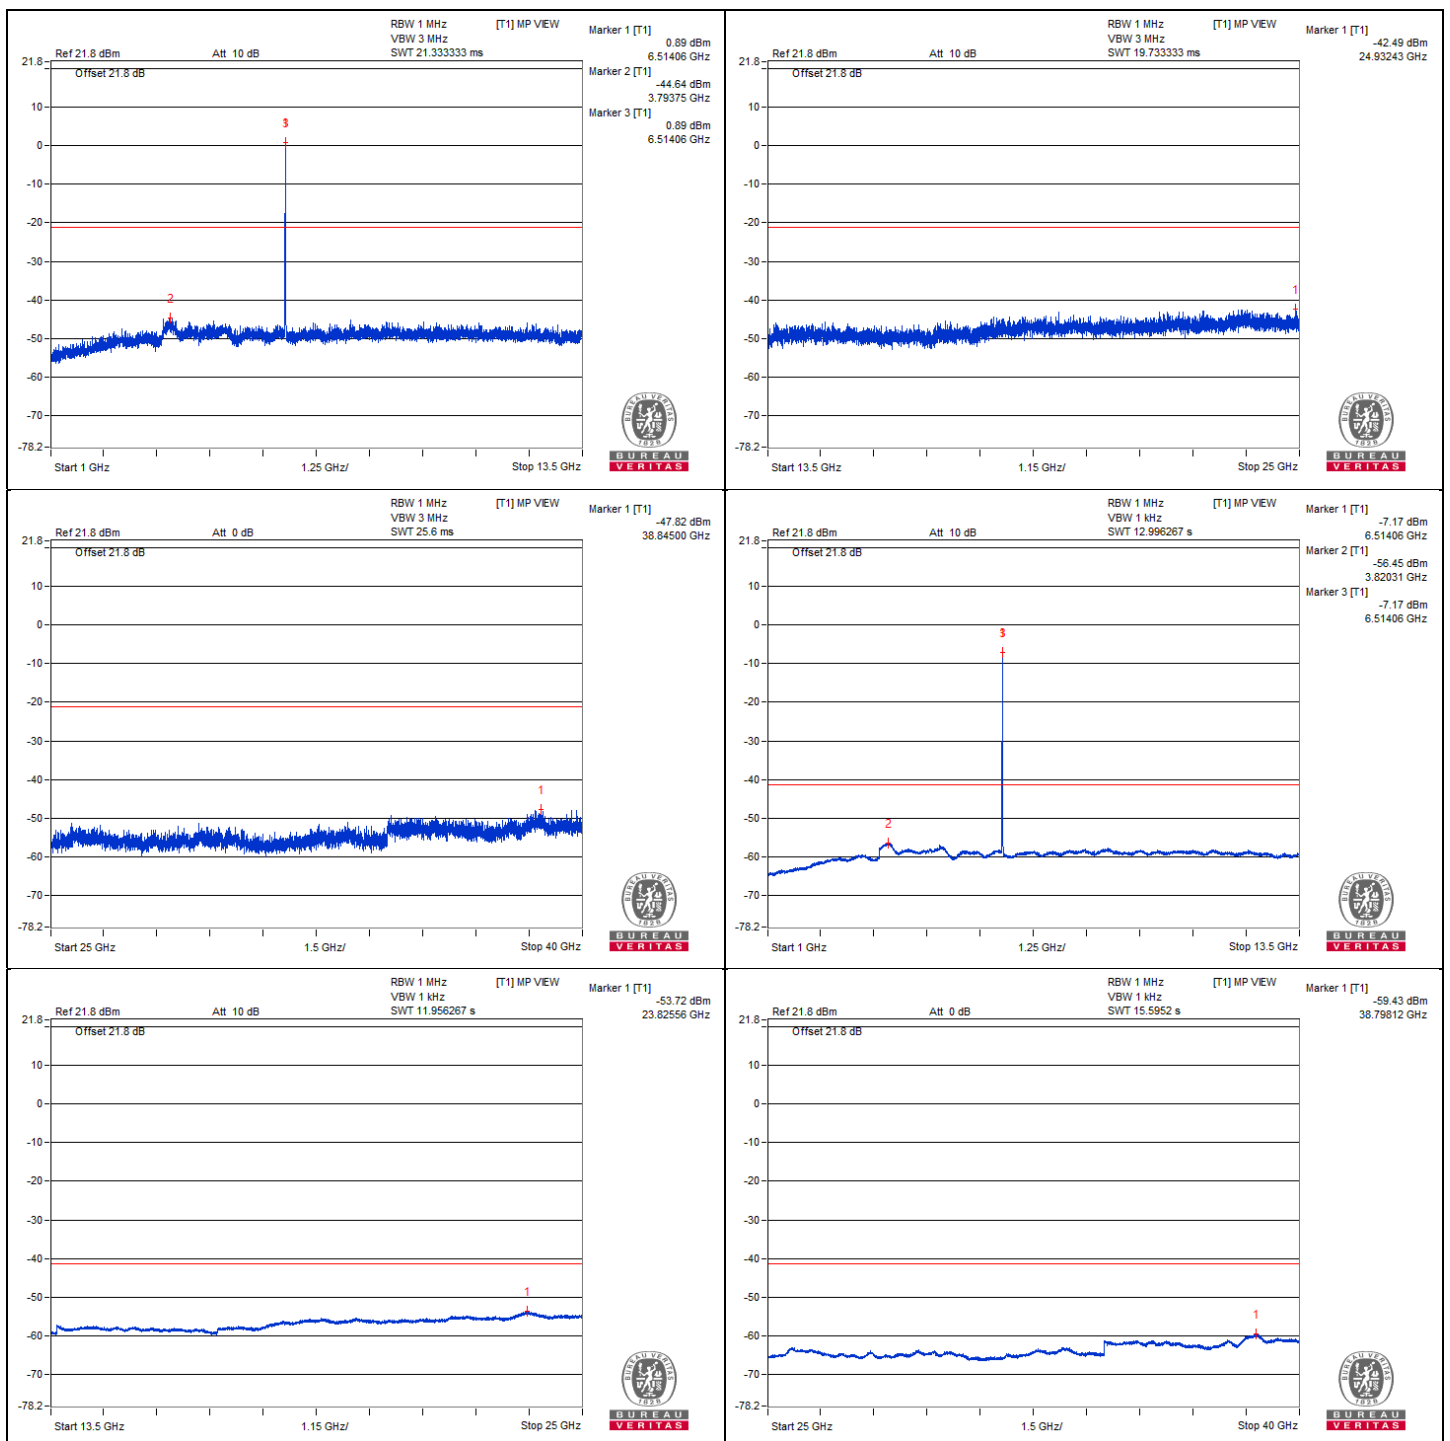









802.11a - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38733.75	52.2 PK	74	-21.8	-47.98	4.92	-43.06
2	38744.5	40.76 AV	54	-13.24	-59.42	4.92	-54.50

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

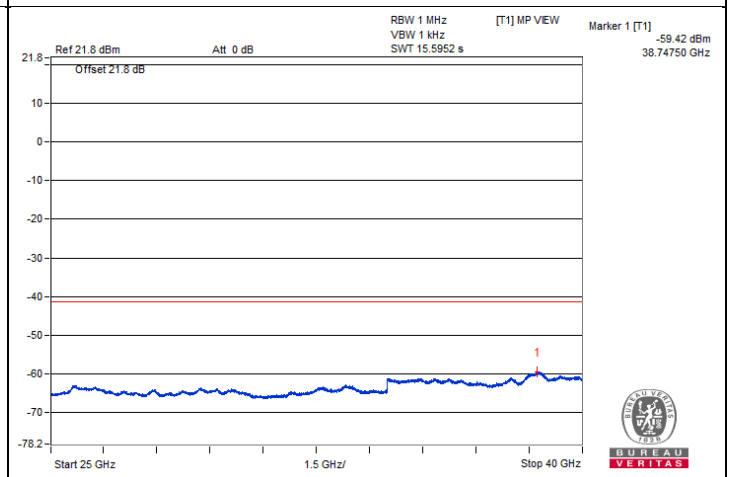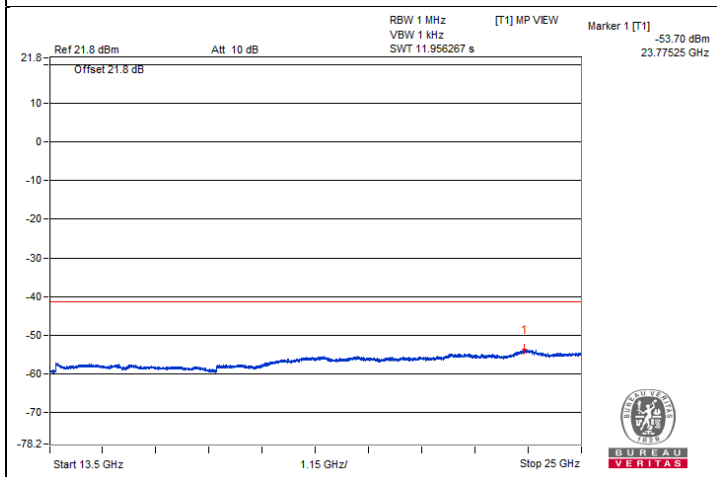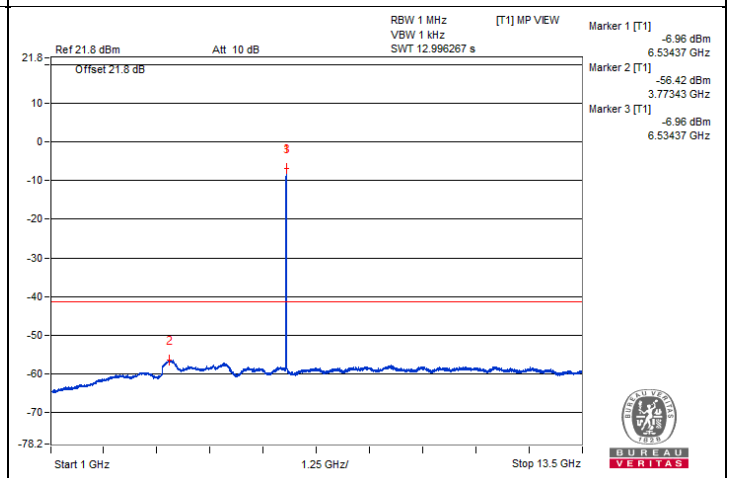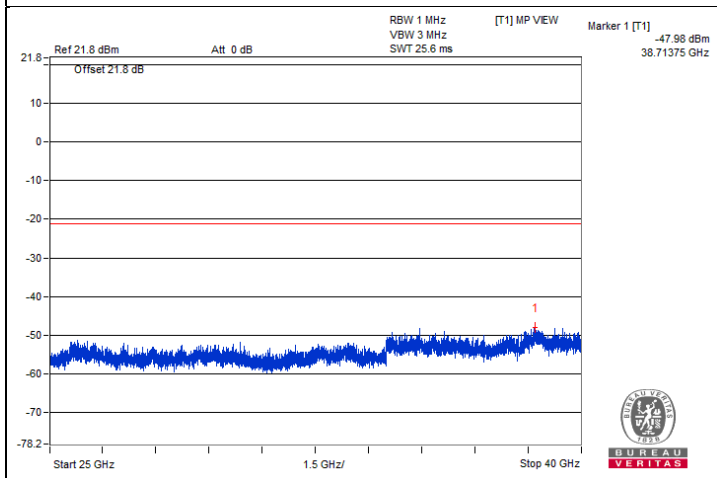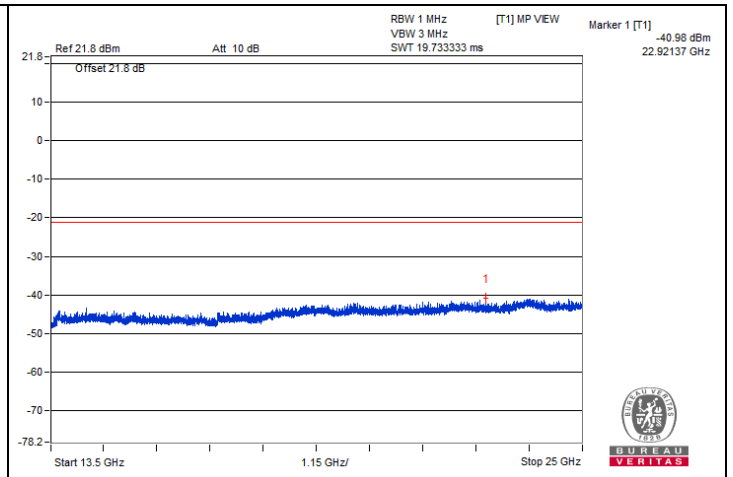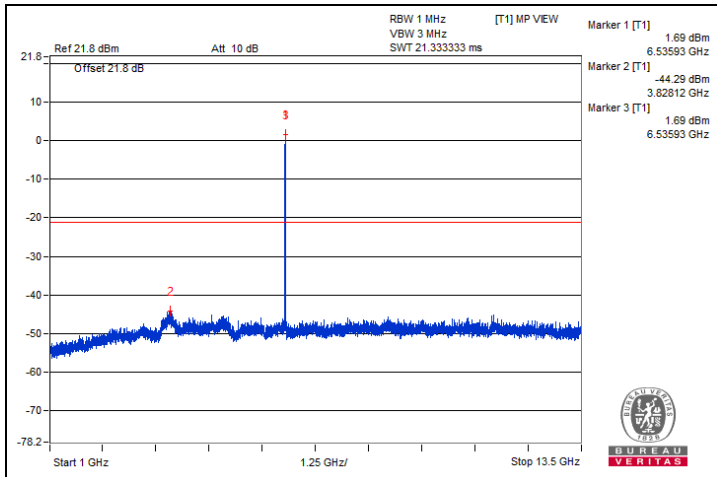


802.11a - Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38789	52.11 PK	74	-21.89	-48.07	4.92	-43.15
2	38771.87	40.67 AV	54	-13.33	-59.51	4.92	-54.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

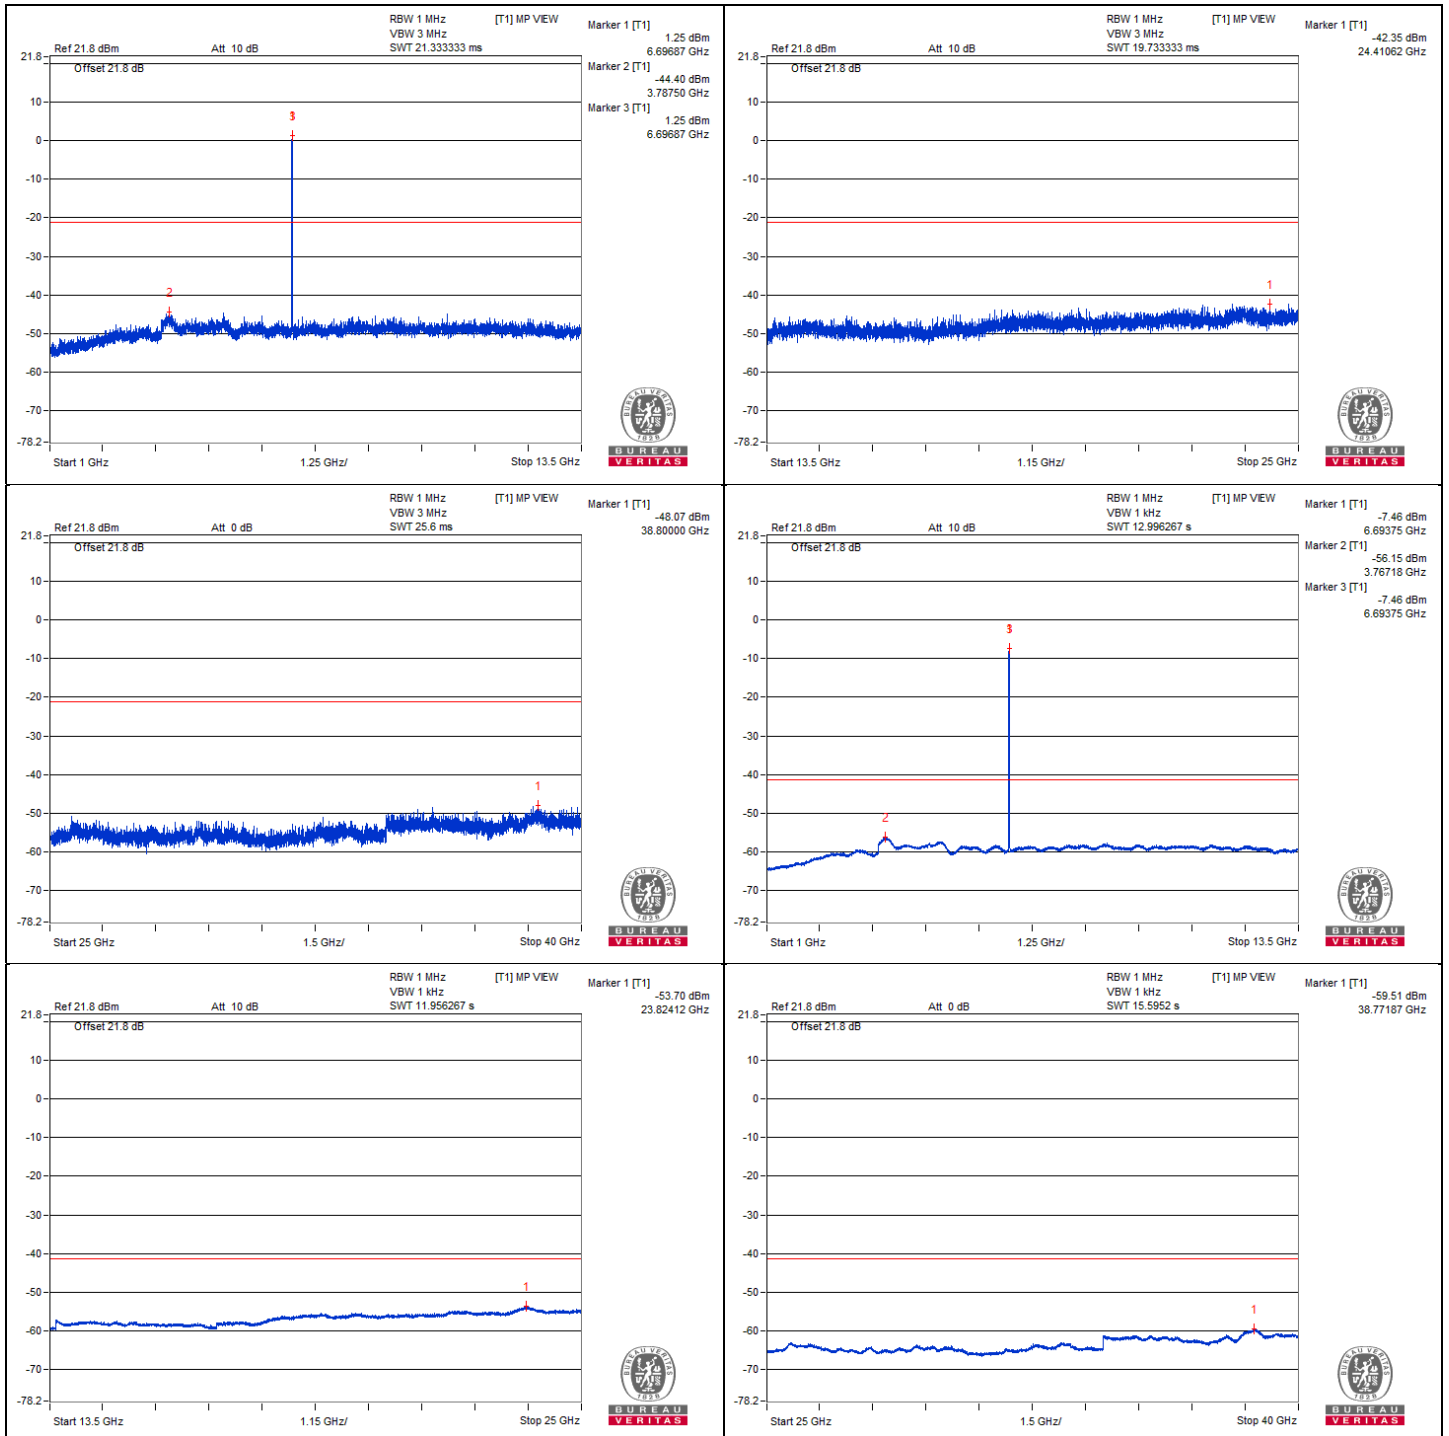




802.11a - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38836.87	52.25 PK	74	-21.75	-47.93	4.92	-43.01
2	38826.25	40.57 AV	54	-13.43	-59.61	4.92	-54.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

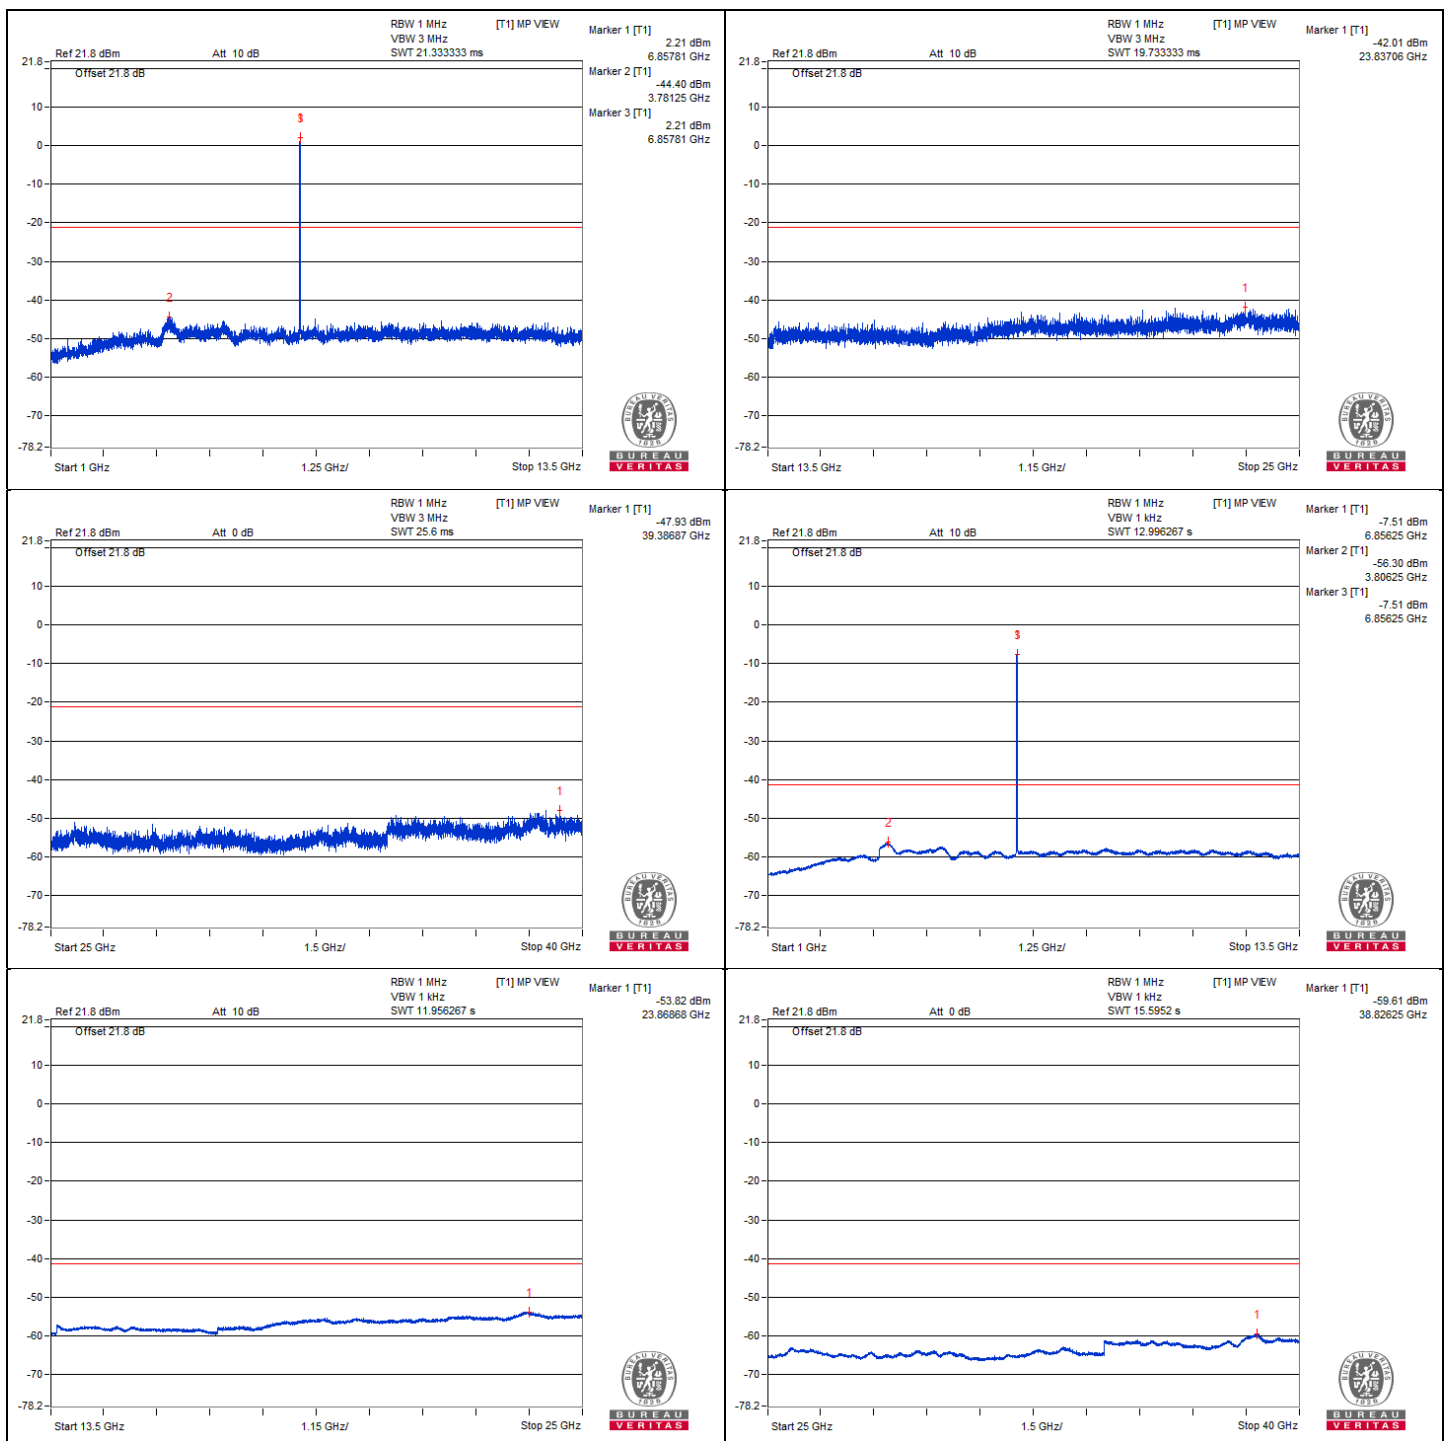


**802.11a - Channel 185**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38831.87	53.27 PK	74	-20.73	-46.91	4.92	-41.99
2	38815	40.72 AV	54	-13.28	-59.46	4.92	-54.54

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

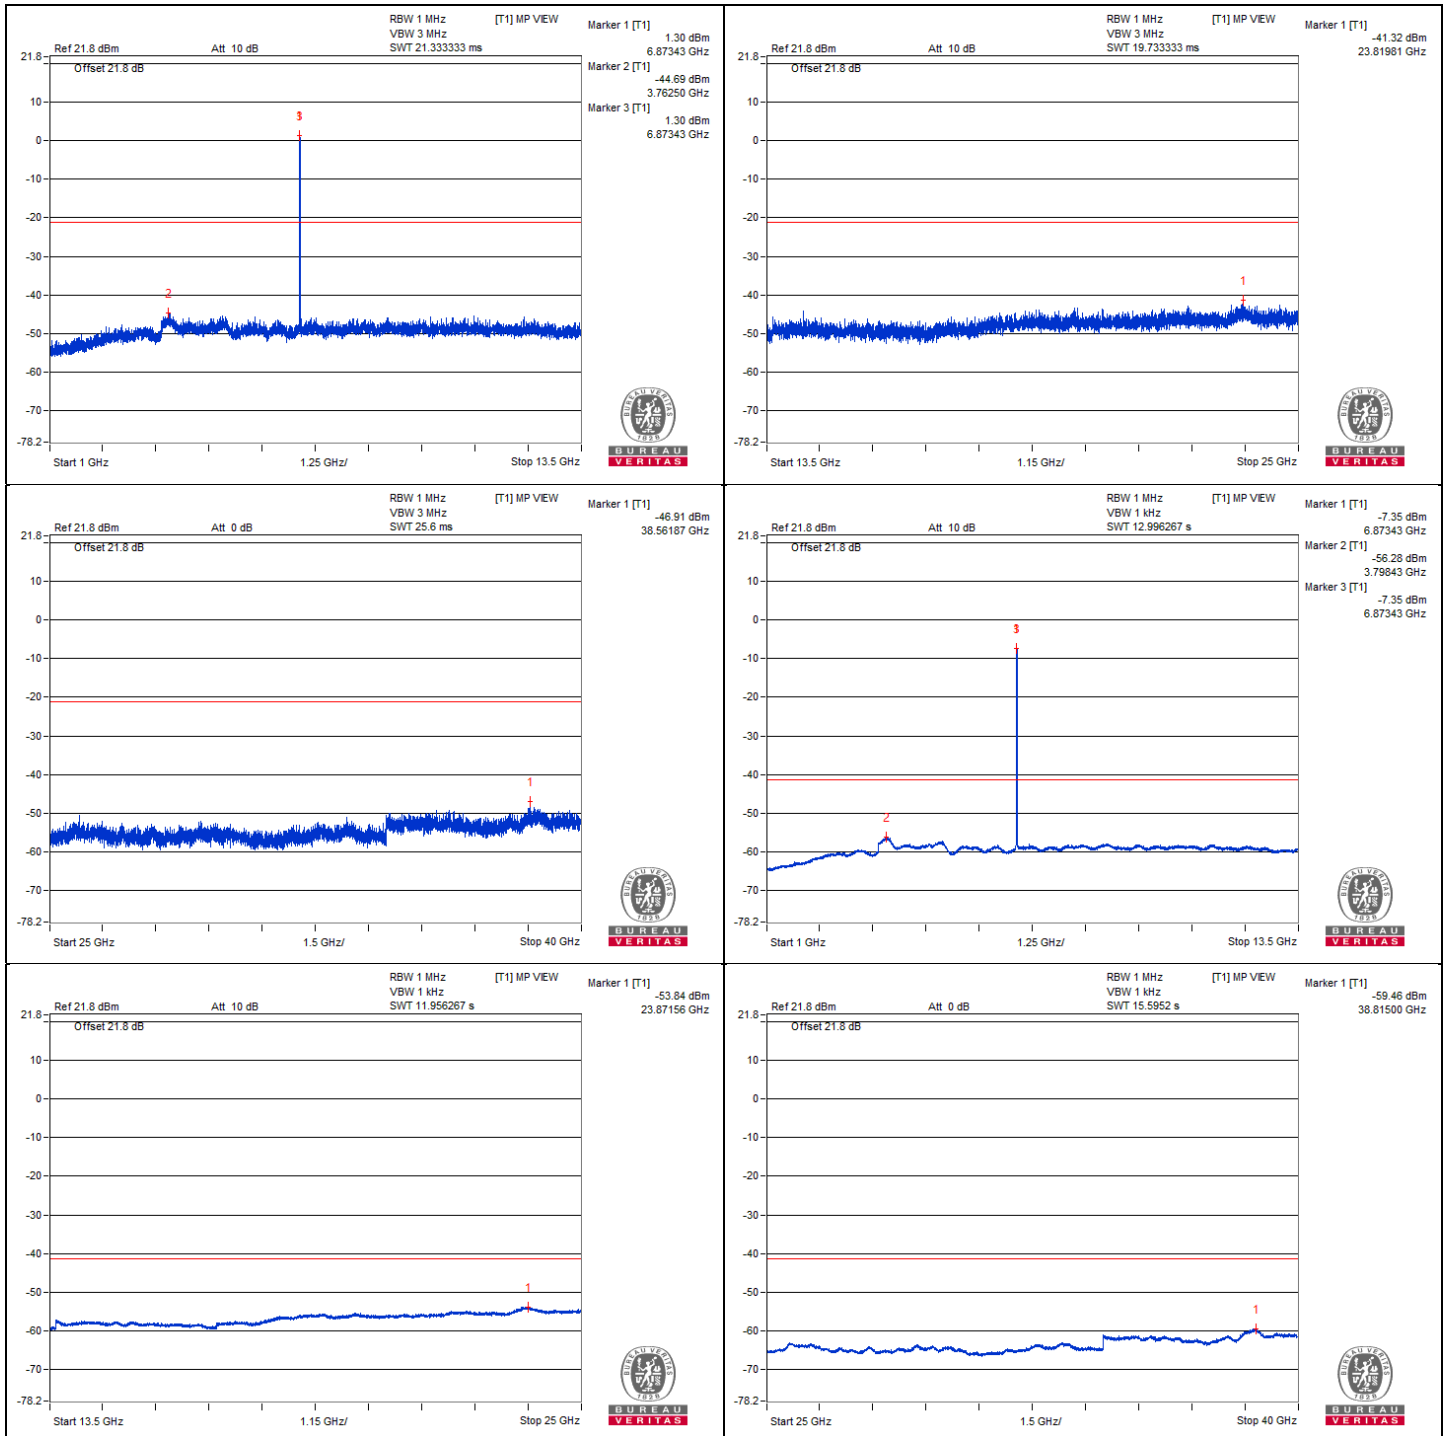


**802.11a - Channel 209**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38782.5	53.36 PK	74	-20.64	-46.82	4.92	-41.90
2	38798.12	40.53 AV	54	-13.47	-59.65	4.92	-54.73

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

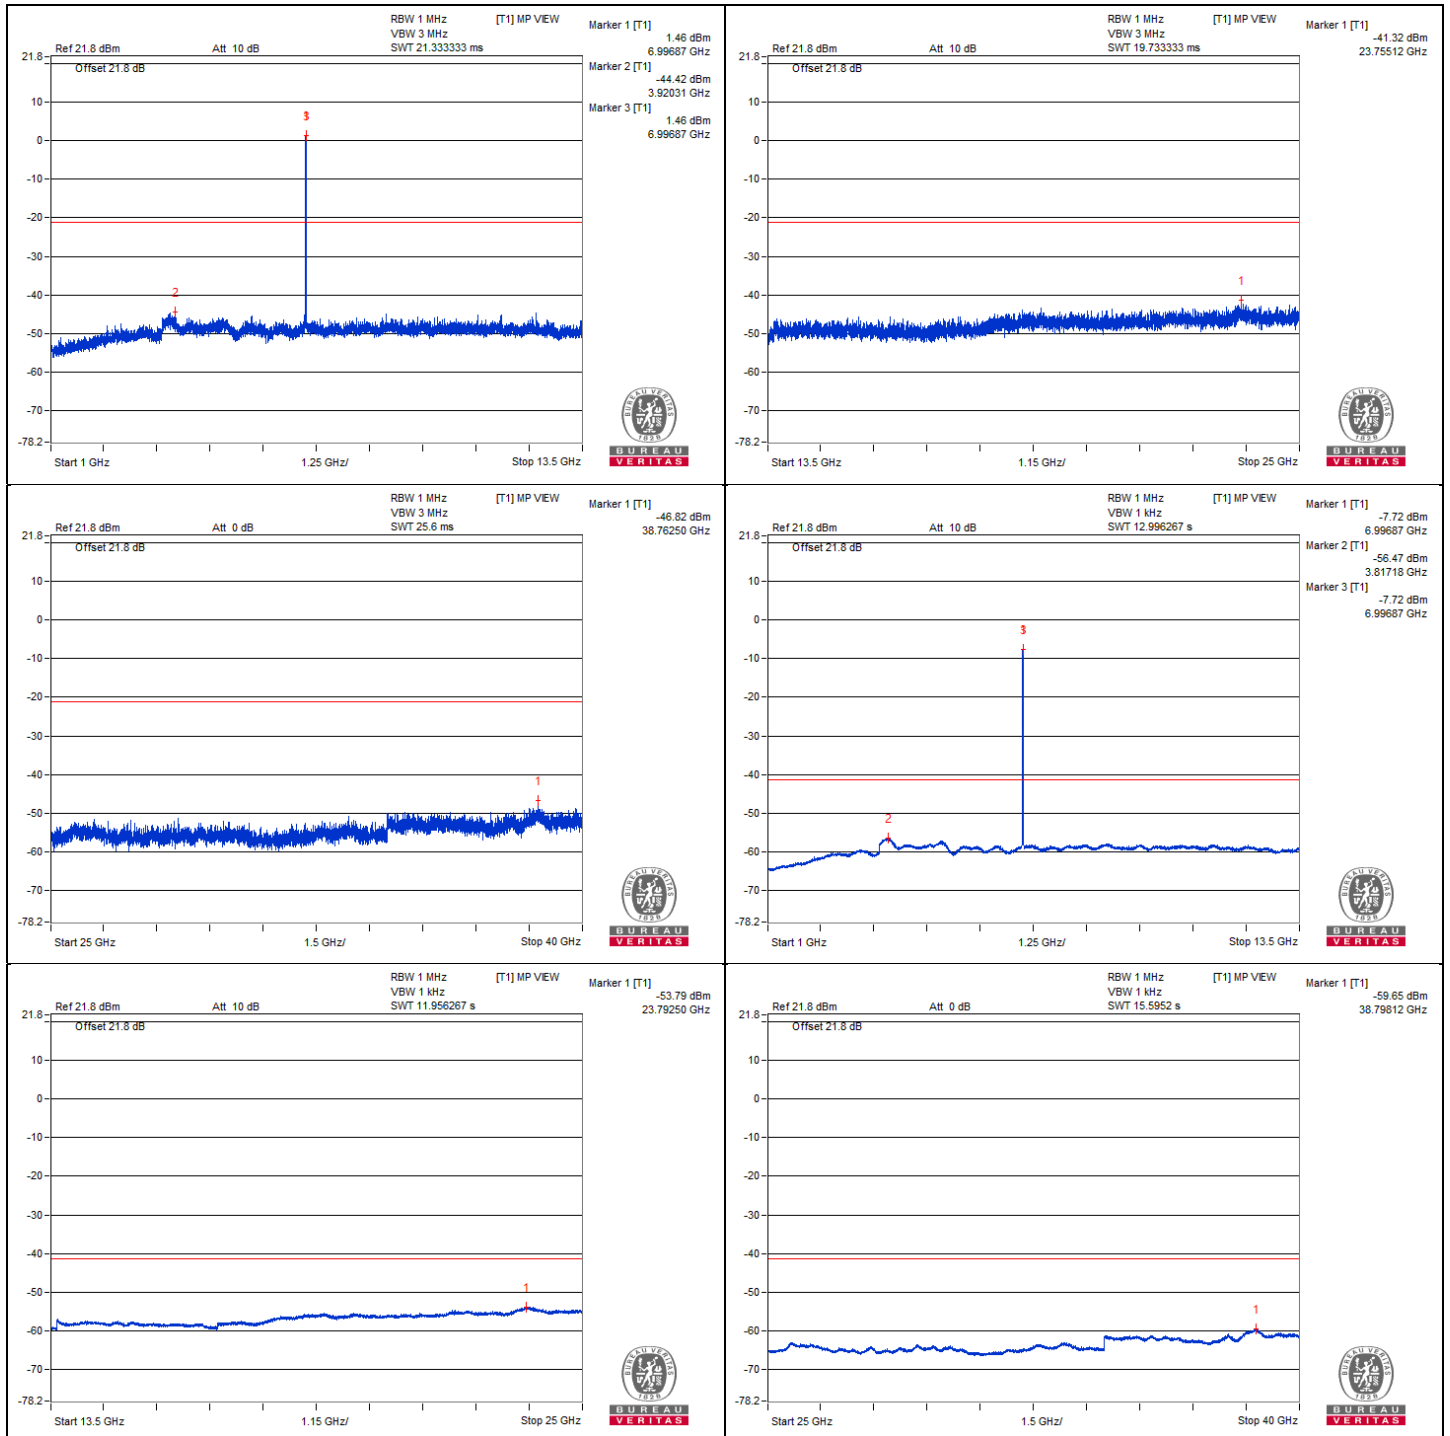


**802.11a - Channel 233**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38807.5	52.28 PK	74	-21.72	-47.9	4.92	-42.98
2	38794.37	40.62 AV	54	-13.38	-59.56	4.92	-54.64

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

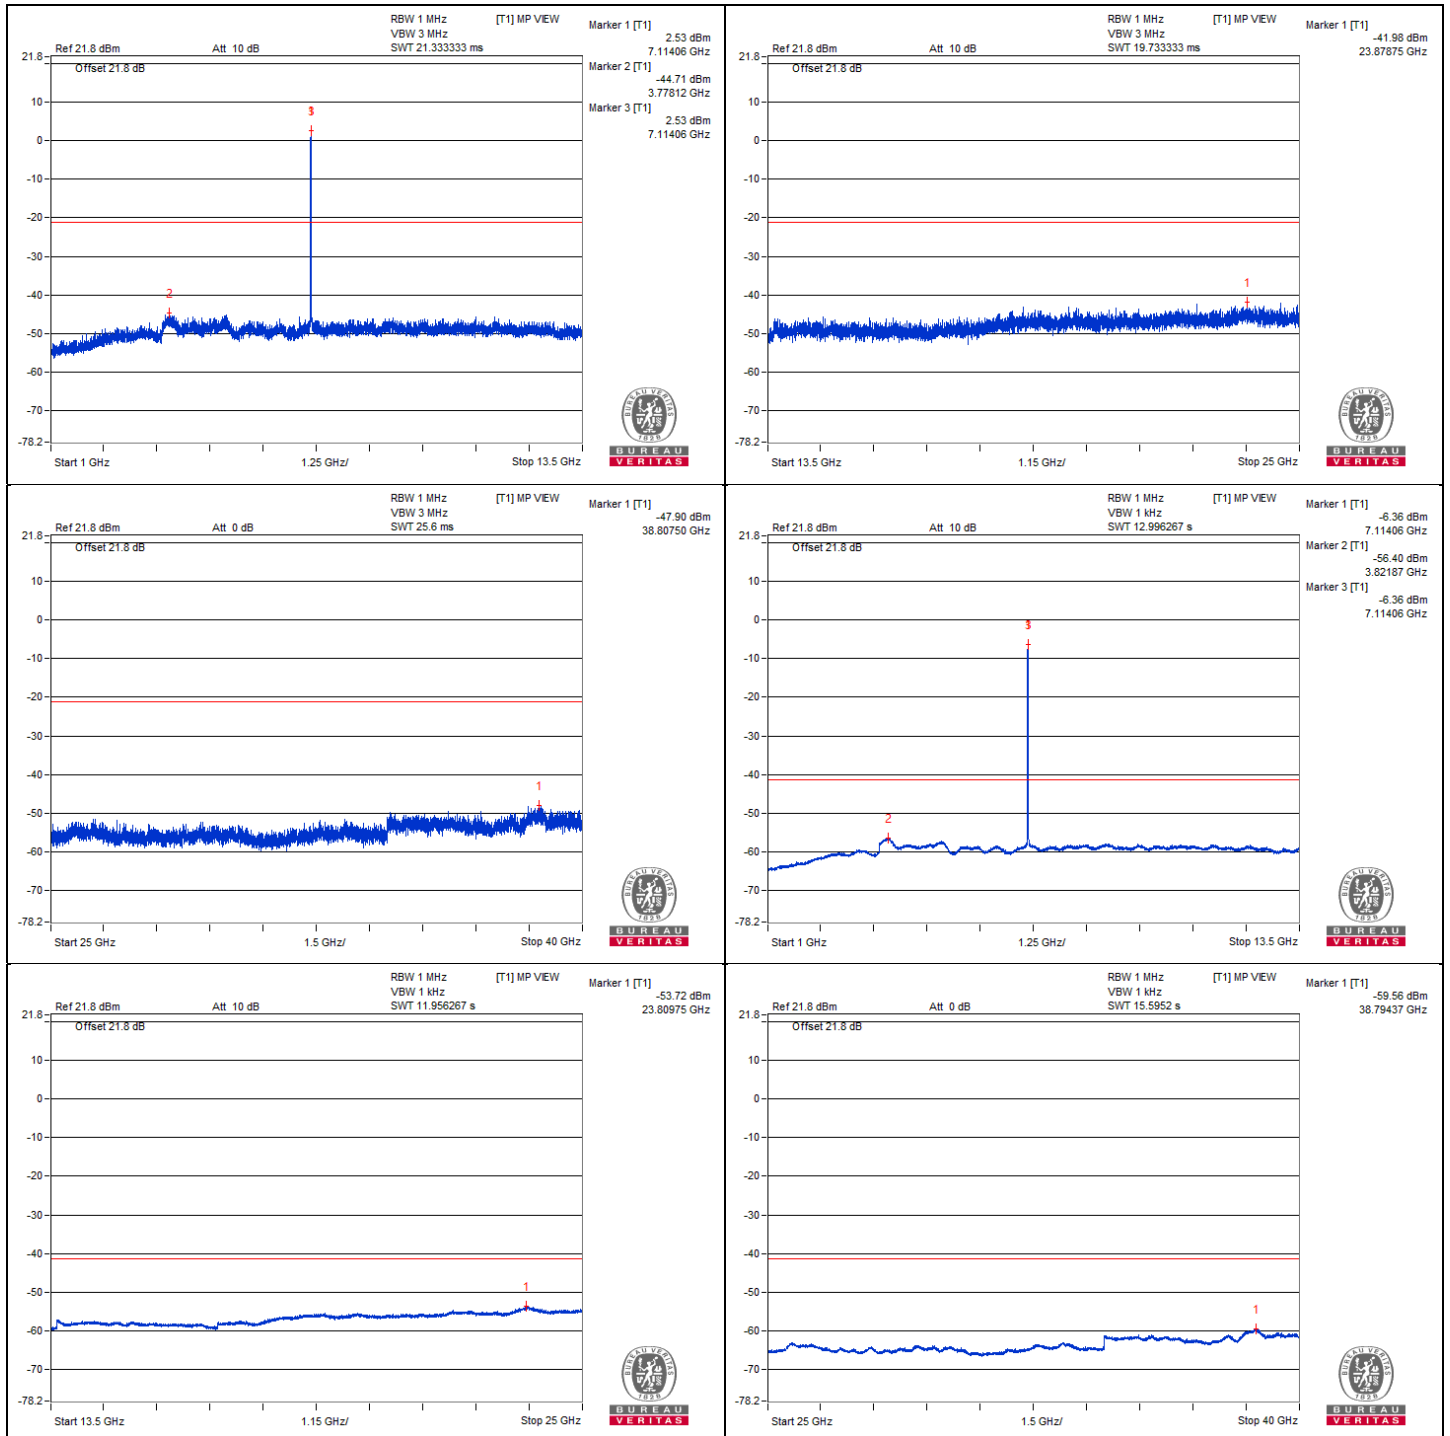


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	70.13 PK	88.2	-18.07	-29.22	4.09	-25.13
2	#7125.02	59.31 AV	68.2	-8.89	-40.04	4.09	-35.95

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

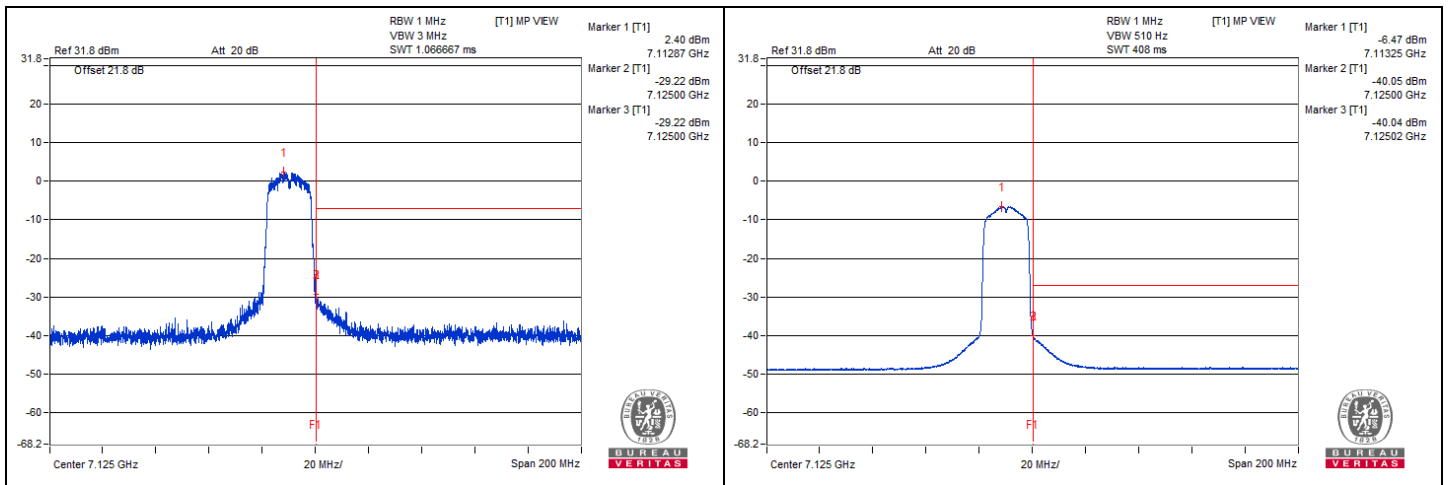

**1S1T**  
**802.11be (EHT20) - Channel 1**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38790.62	52.44 PK	74	-21.56	-47.74	4.92	-42.82
2	38783.12	40.49 AV	54	-13.51	-59.69	4.92	-54.77

Remarks:  
 1. Margin value = Emission Level – Limit value  
 2. The other emission levels were very low against the limit.

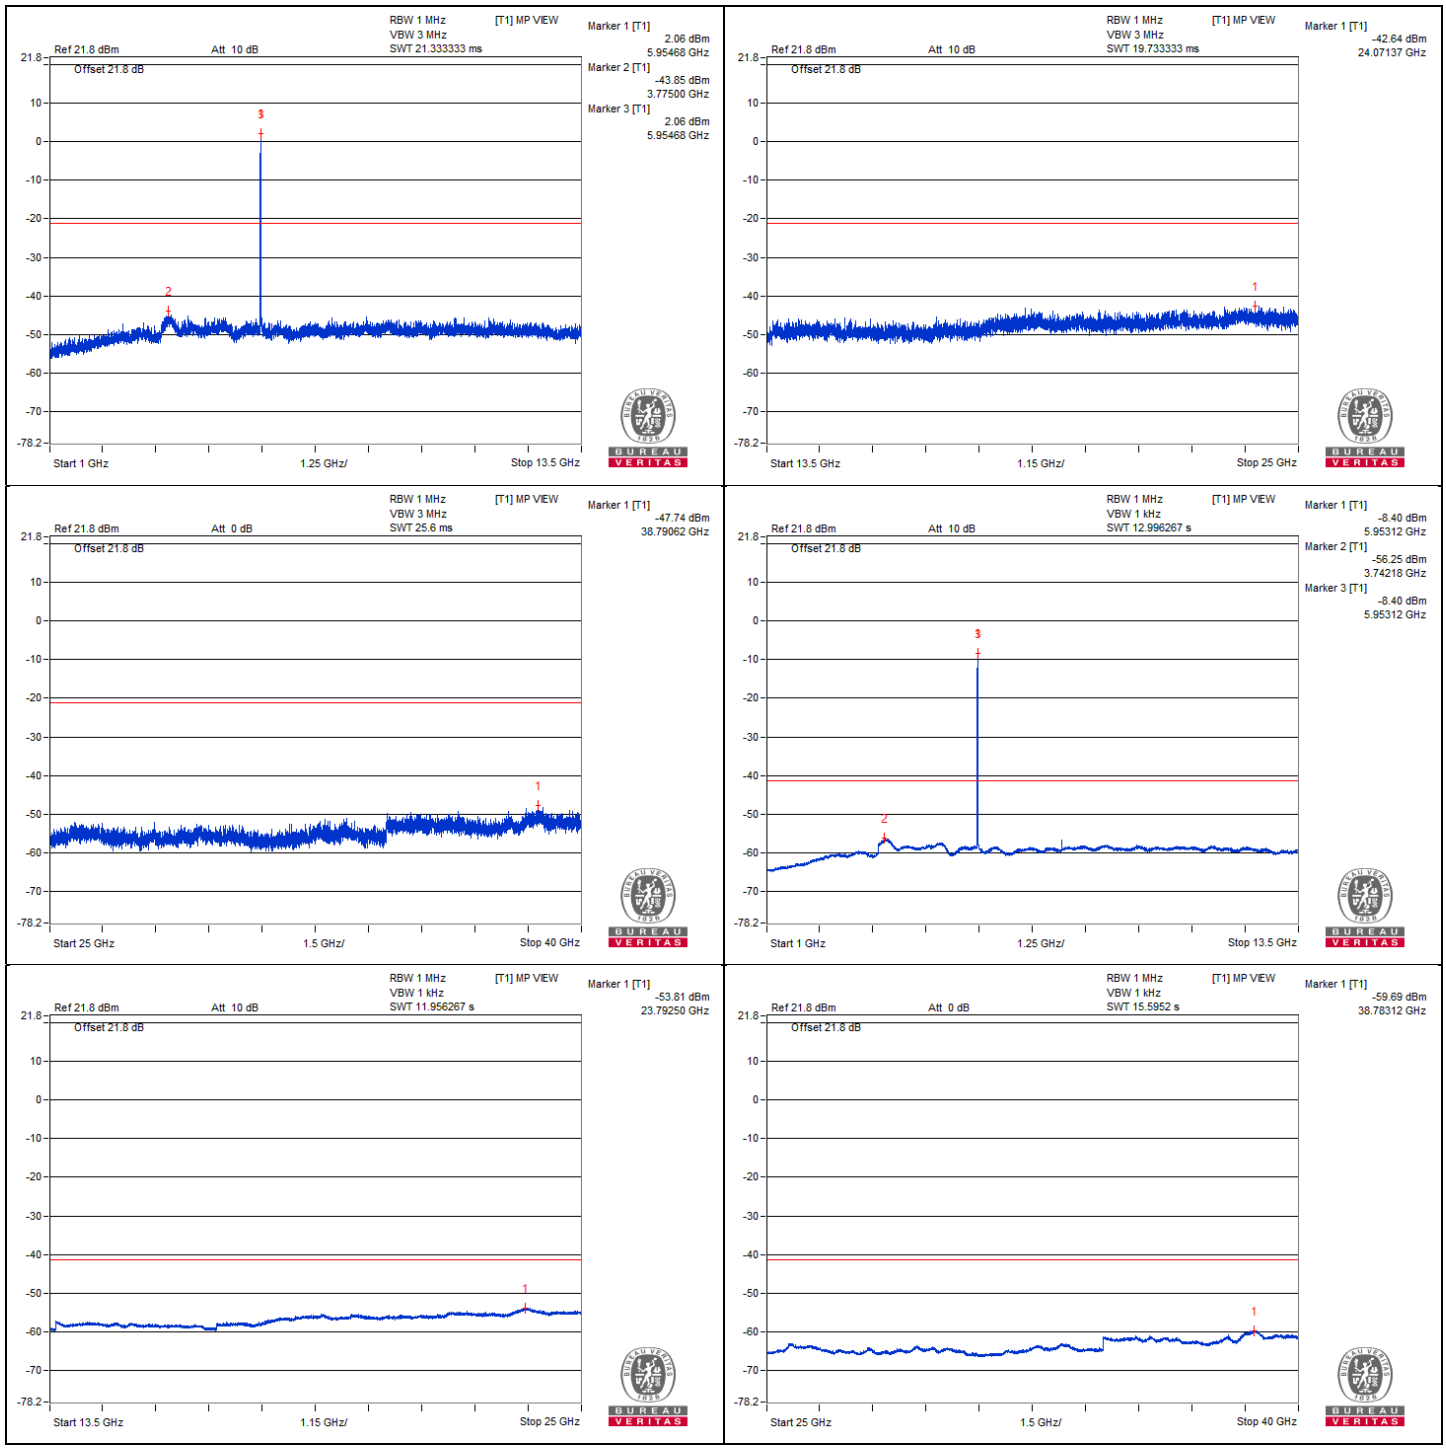


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5881.42	63.76 PK	88.2	-24.44	-36.26	4.76	-31.50
2	#5858.5	51.72 AV	68.2	-16.48	-48.3	4.76	-43.54

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

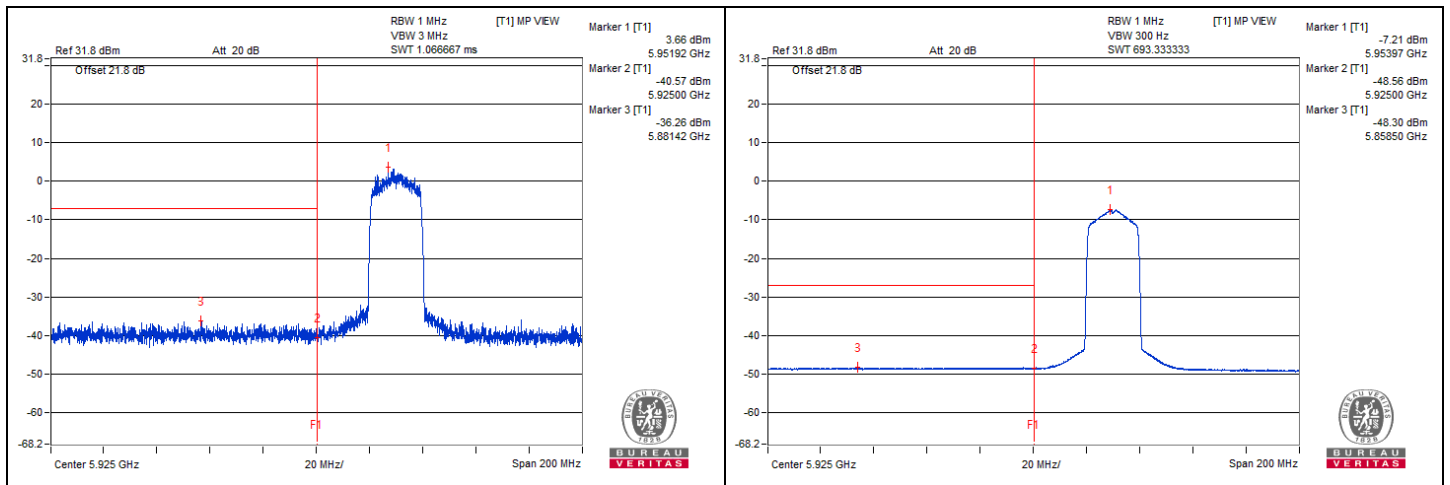


**802.11be (EHT20) - Channel 45**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38672.5	52.15 PK	74	-21.85	-48.03	4.92	-43.11
2	38683.12	40.49 AV	54	-13.51	-59.69	4.92	-54.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

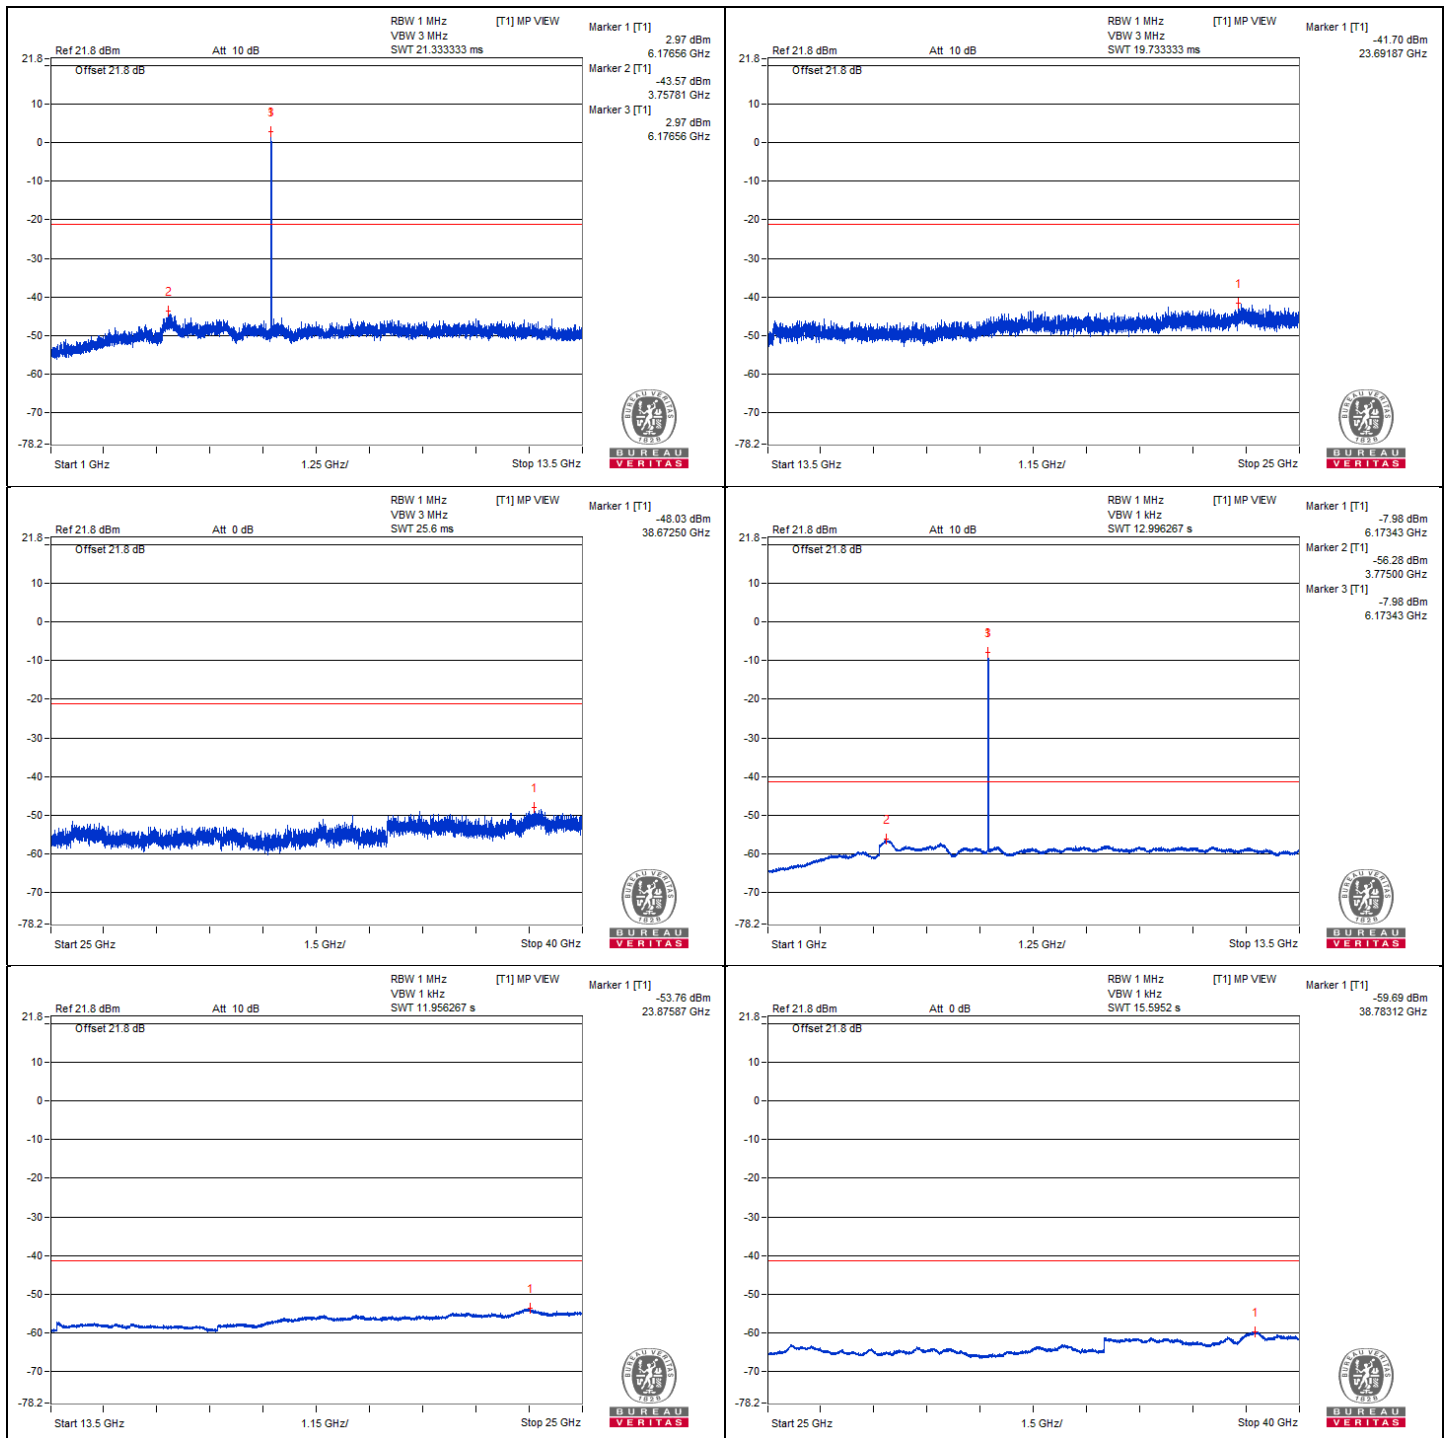






### 802.11be (EHT20) - Channel 93

### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38739.37	51.82 PK	74	-22.18	-48.36	4.92	-43.44
2	38751.25	40.71 AV	54	-13.29	-59.47	4.92	-54.55

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

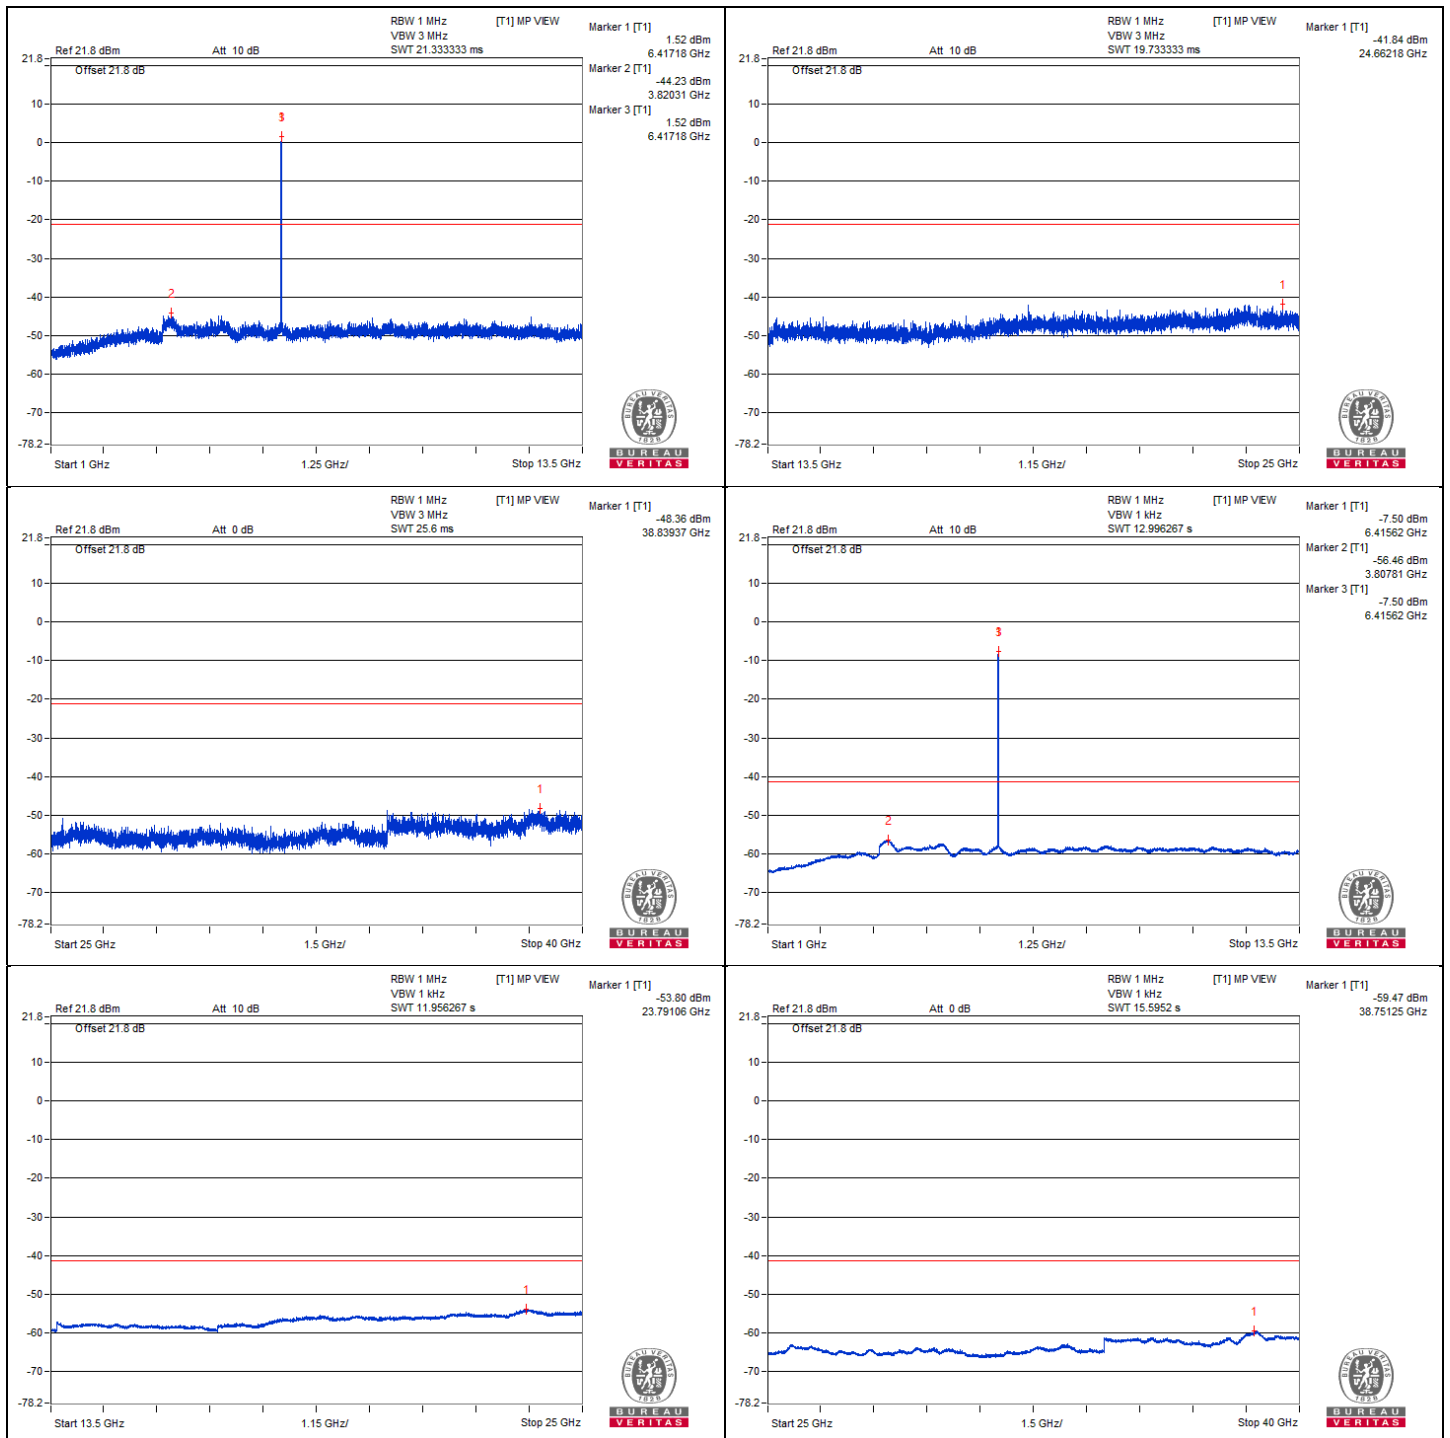


**802.11be (EHT20) - Channel 97**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38830	51.95 PK	74	-22.05	-48.23	4.92	-43.31
2	38817.5	40.57 AV	54	-13.43	-59.61	4.92	-54.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

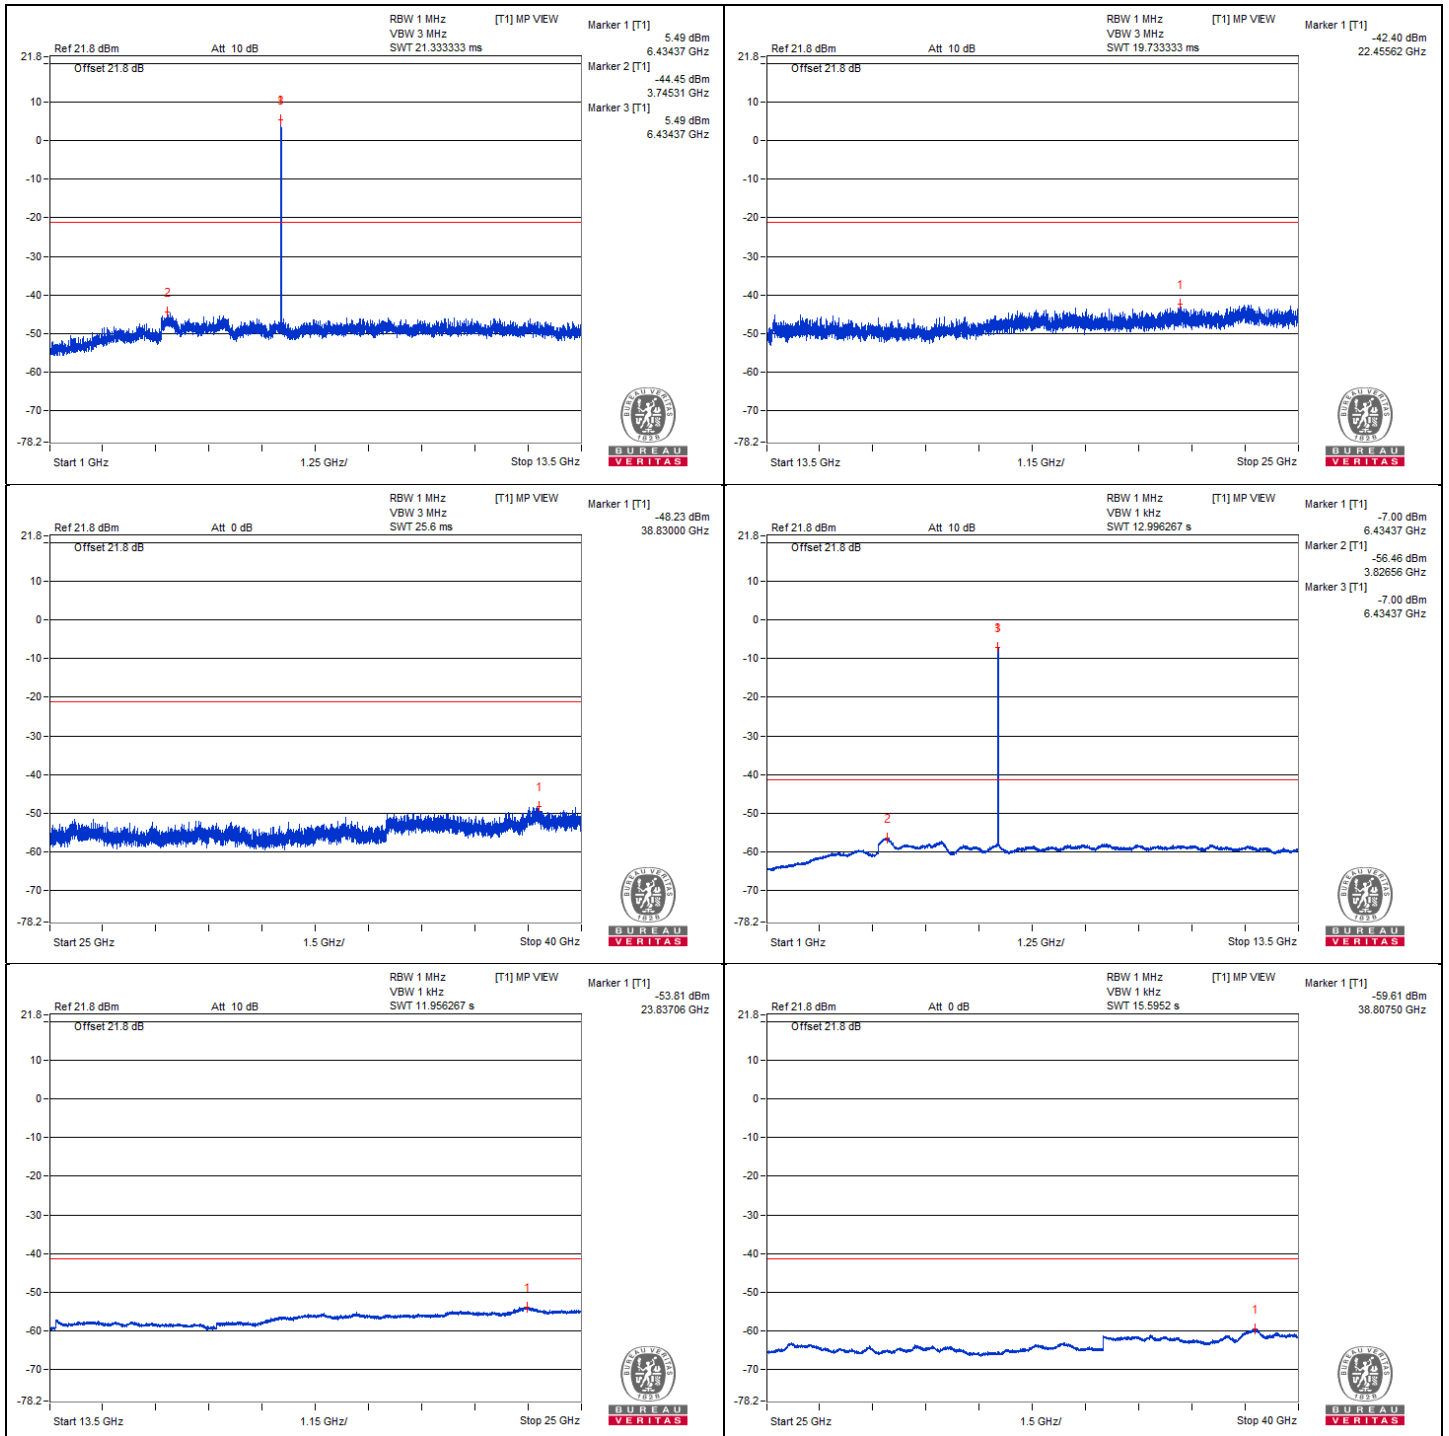




### 802.11be (EHT20) - Channel 105 Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38758.12	52.48 PK	74	-21.52	-47.7	4.92	-42.78
2	38743.75	40.64 AV	54	-13.36	-59.54	4.92	-54.62

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

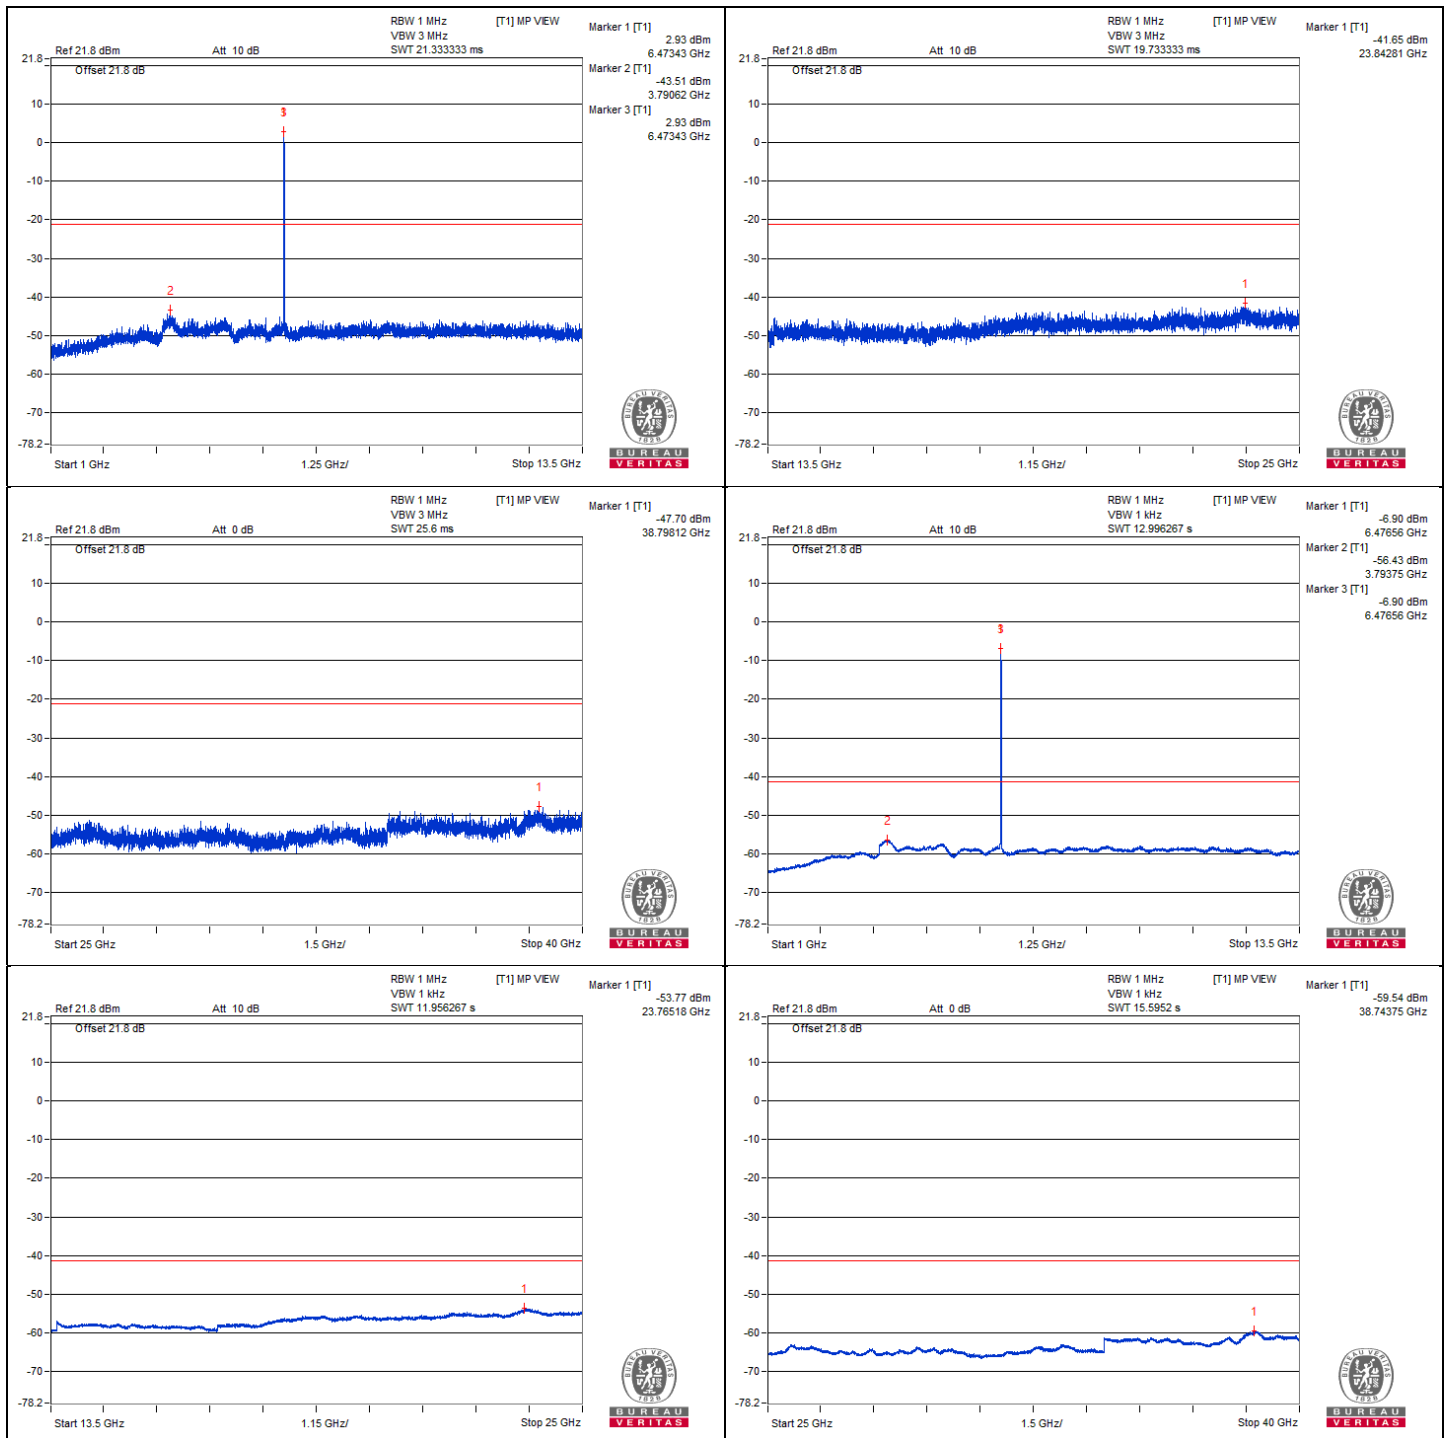


**802.11be (EHT20) - Channel 113**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38730	52.01 PK	74	-21.99	-48.17	4.92	-43.25
2	38745.62	40.57 AV	54	-13.43	-59.61	4.92	-54.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

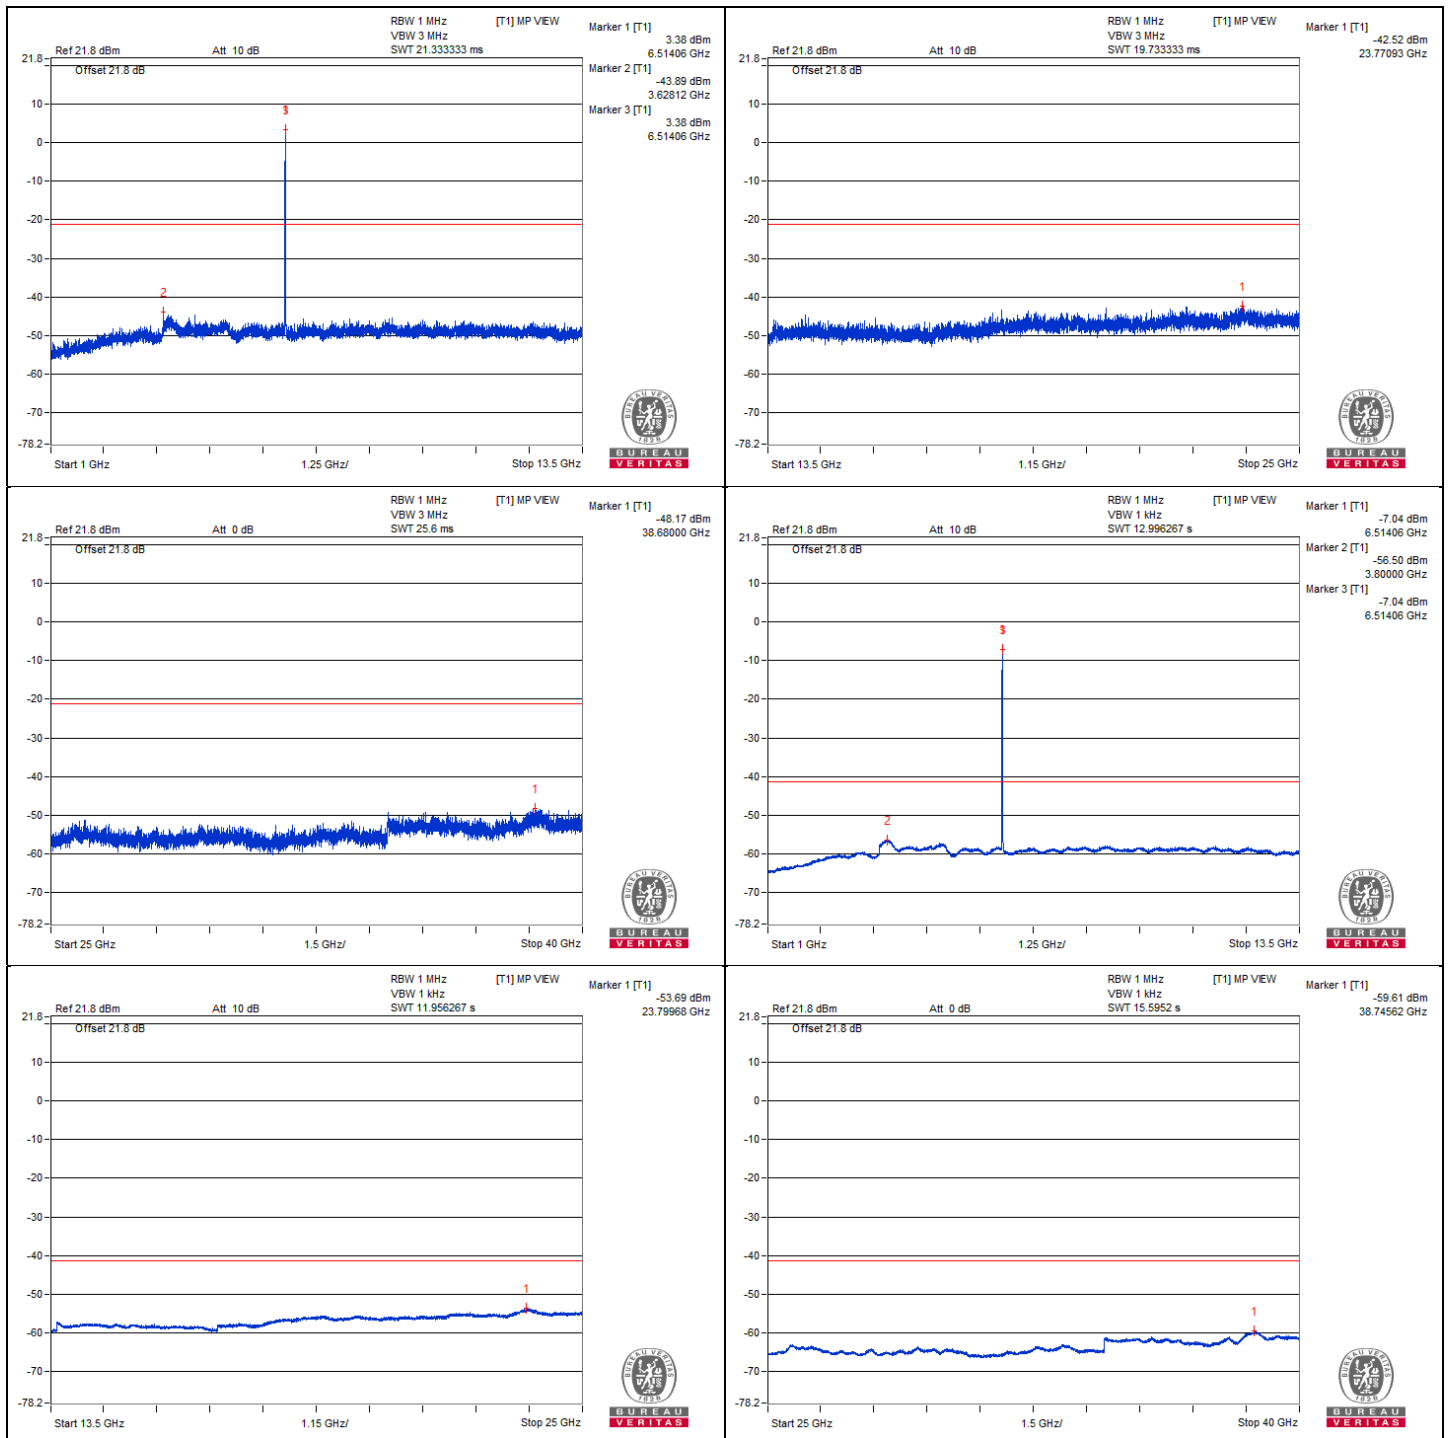


**802.11be (EHT20) - Channel 117**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38778.75	52.78 PK	74	-21.22	-47.4	4.92	-42.48
2	38785	40.73 AV	54	-13.27	-59.45	4.92	-54.53

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

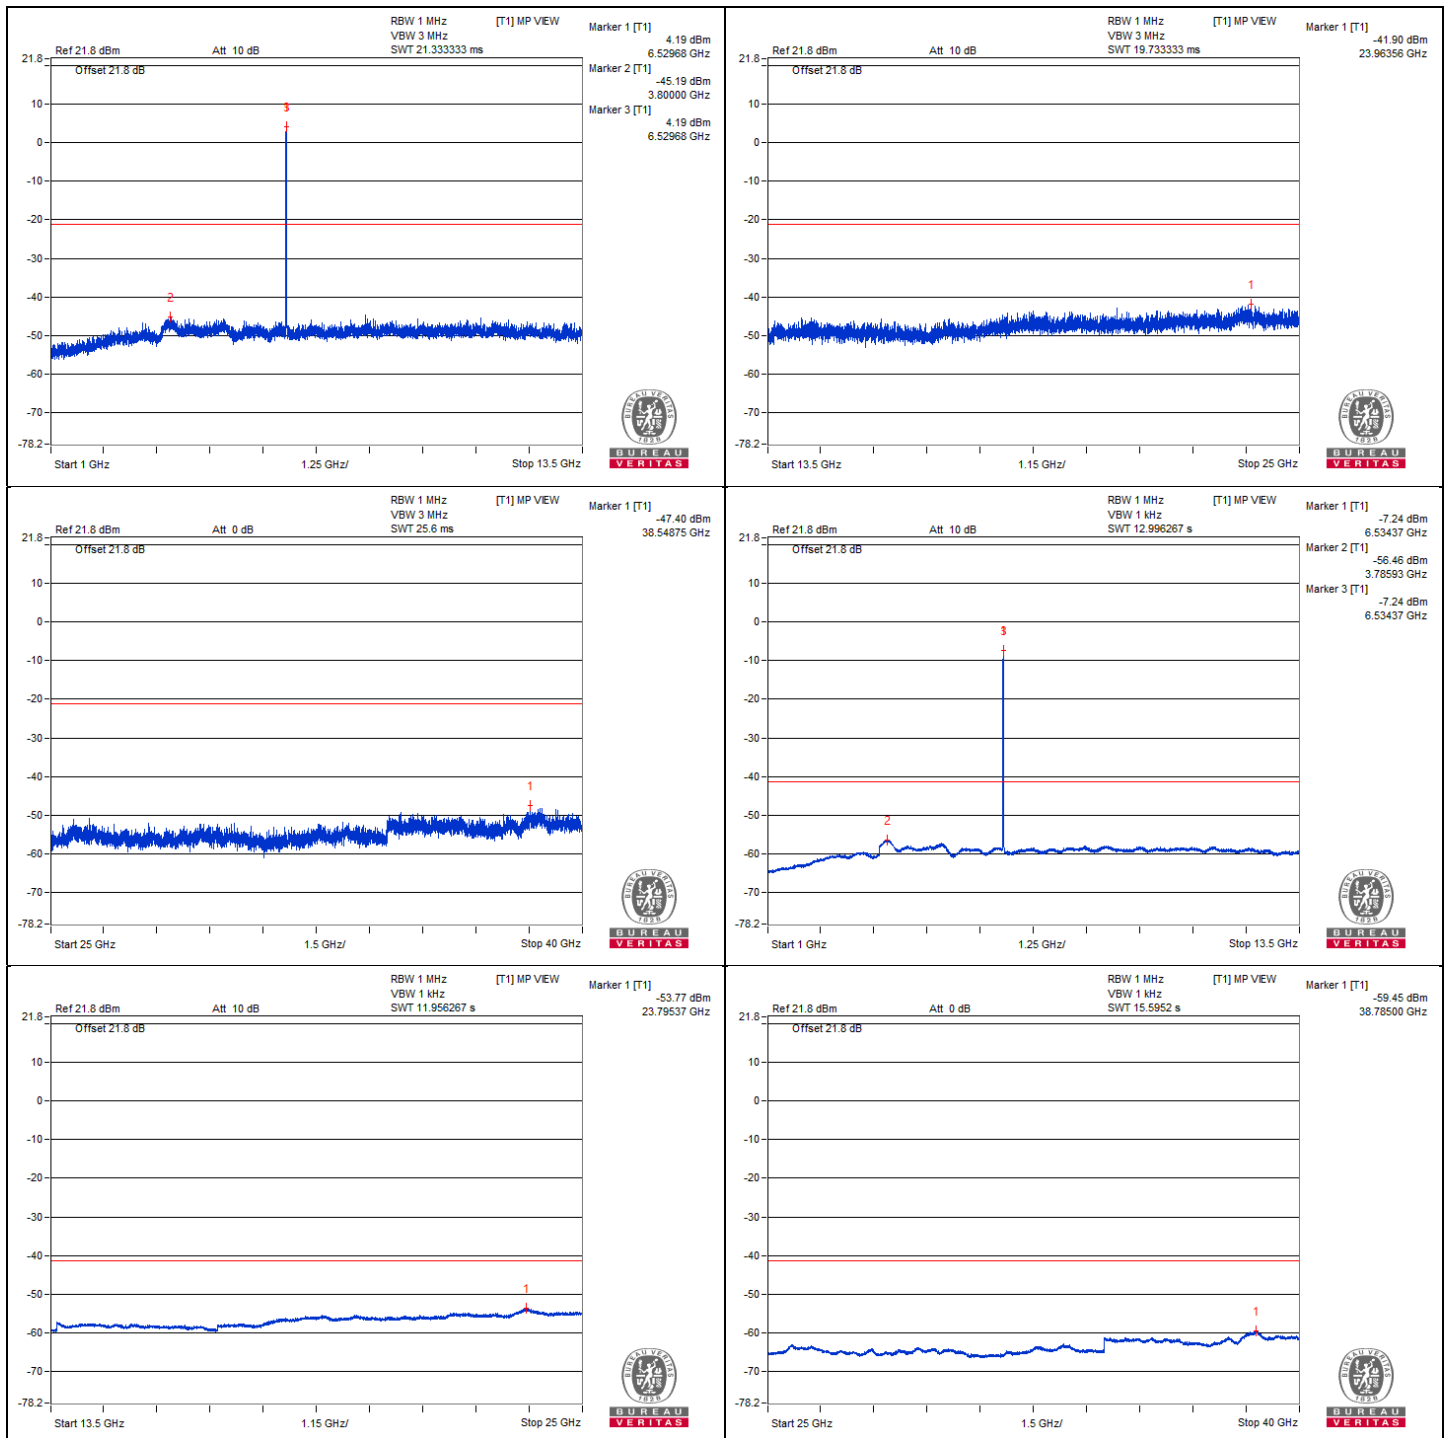


**802.11be (EHT20) - Channel 149**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38799.37	52.41 PK	74	-21.59	-47.77	4.92	-42.85
2	38803.75	40.6 AV	54	-13.4	-59.58	4.92	-54.66

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

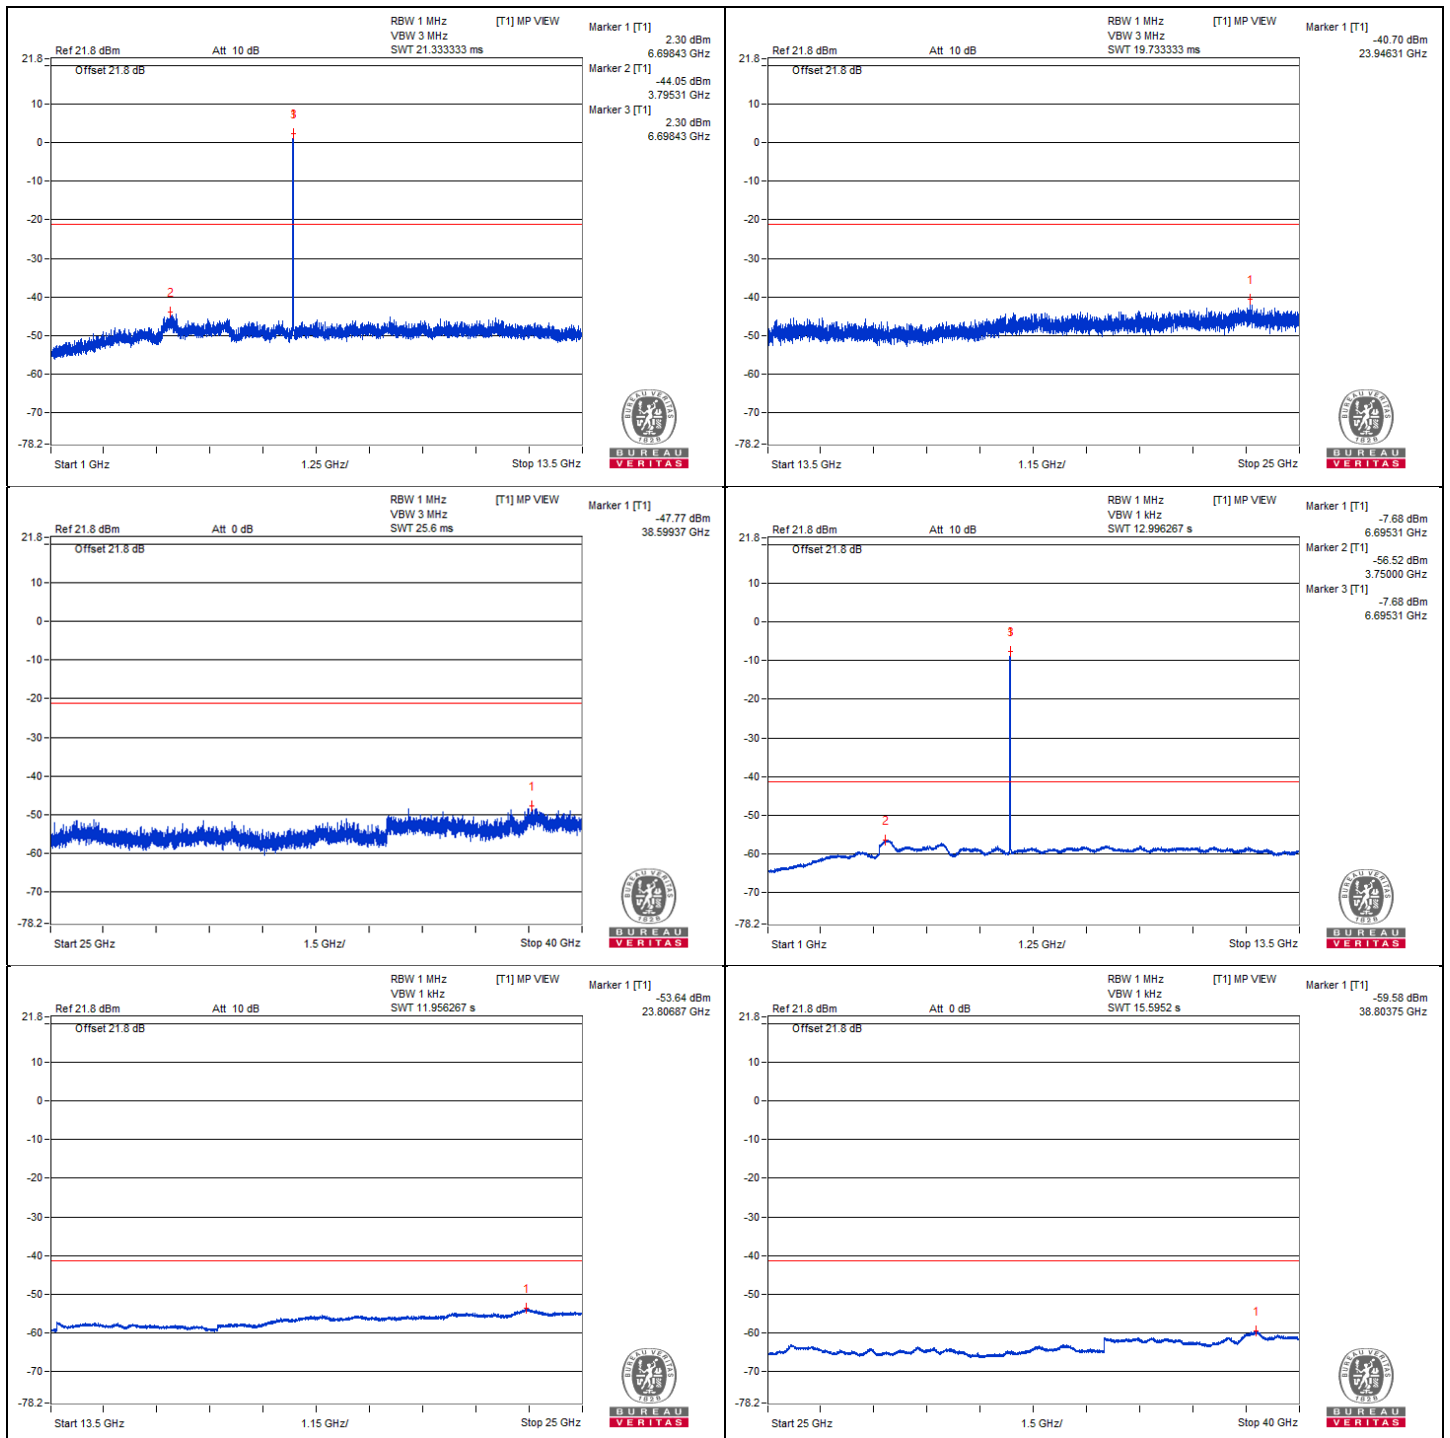


**802.11be (EHT20) - Channel 181**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38782.5	52.02 PK	74	-21.98	-48.16	4.92	-43.24
2	38764.37	40.55 AV	54	-13.45	-59.63	4.92	-54.71

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

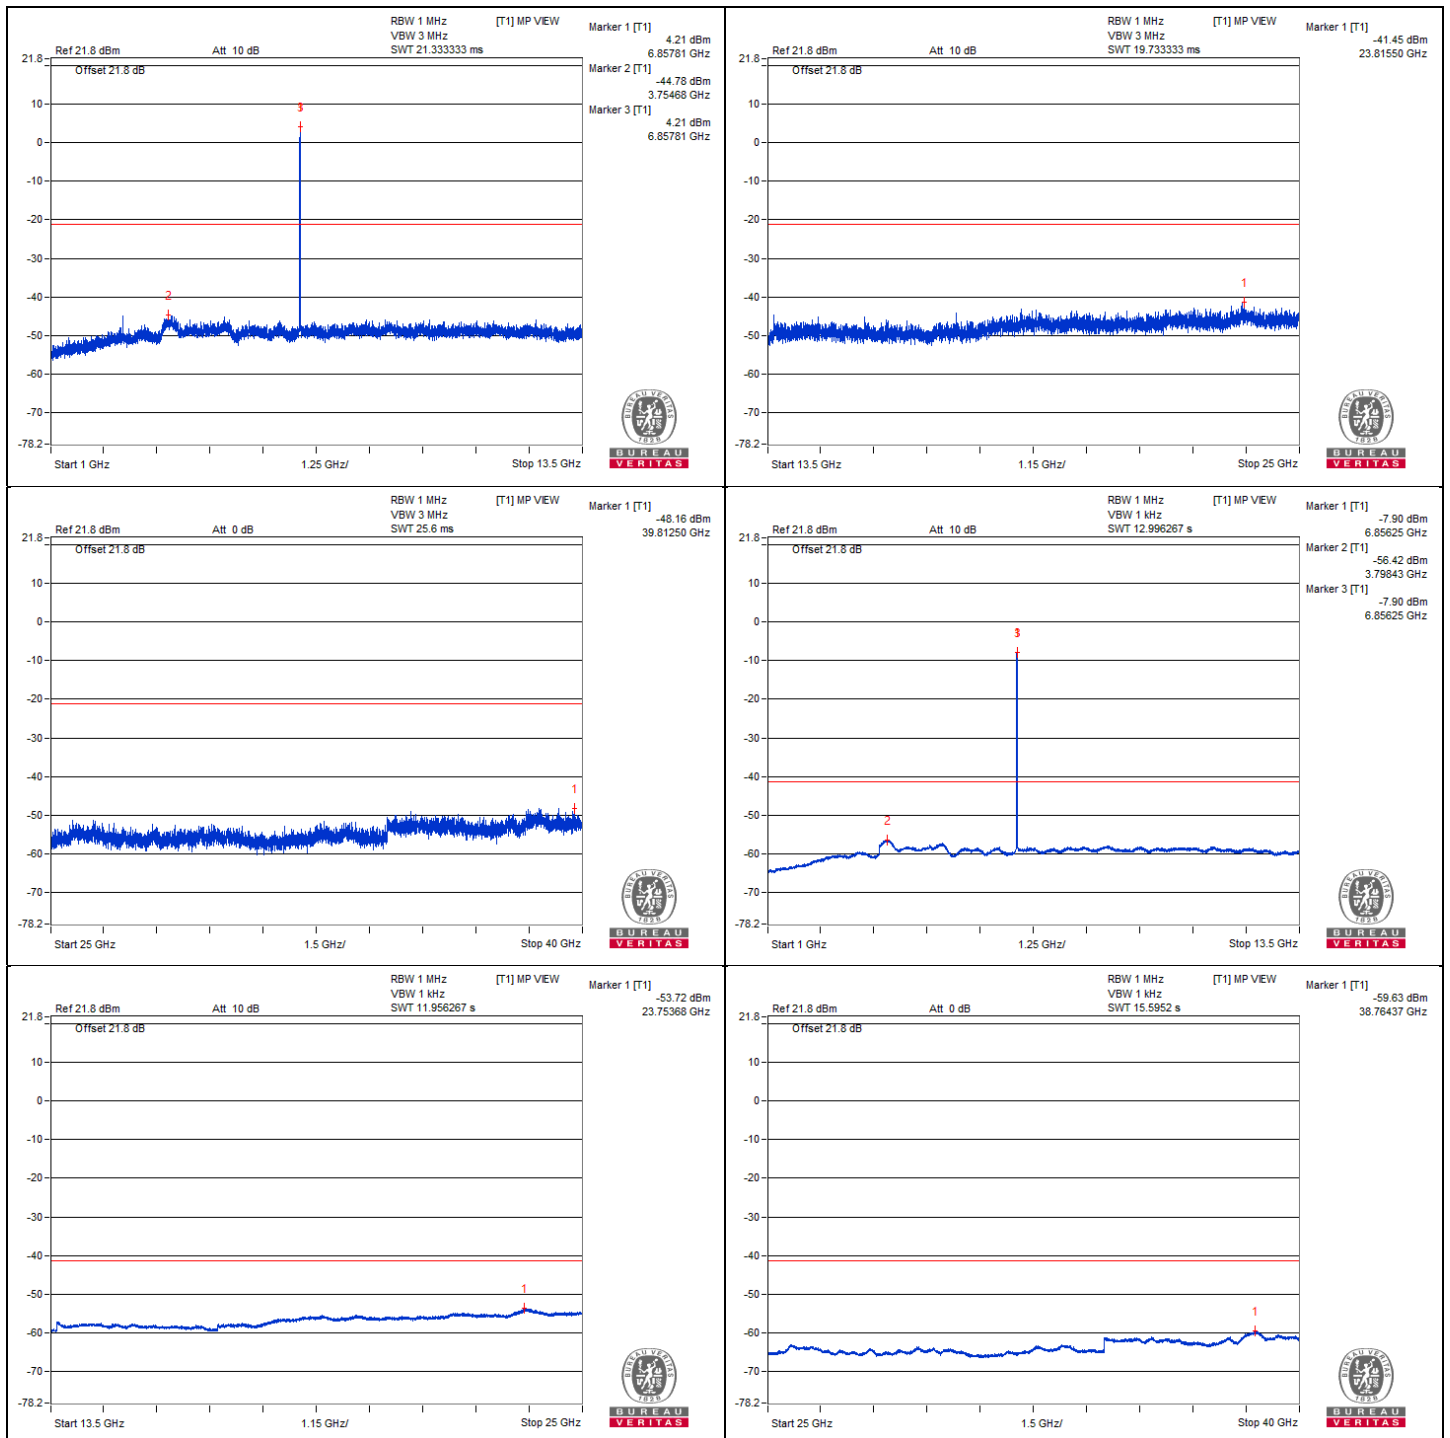


**802.11be (EHT20) - Channel 185**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38850	51.98 PK	74	-22.02	-48.2	4.92	-43.28
2	38865.62	40.65 AV	54	-13.35	-59.53	4.92	-54.61

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

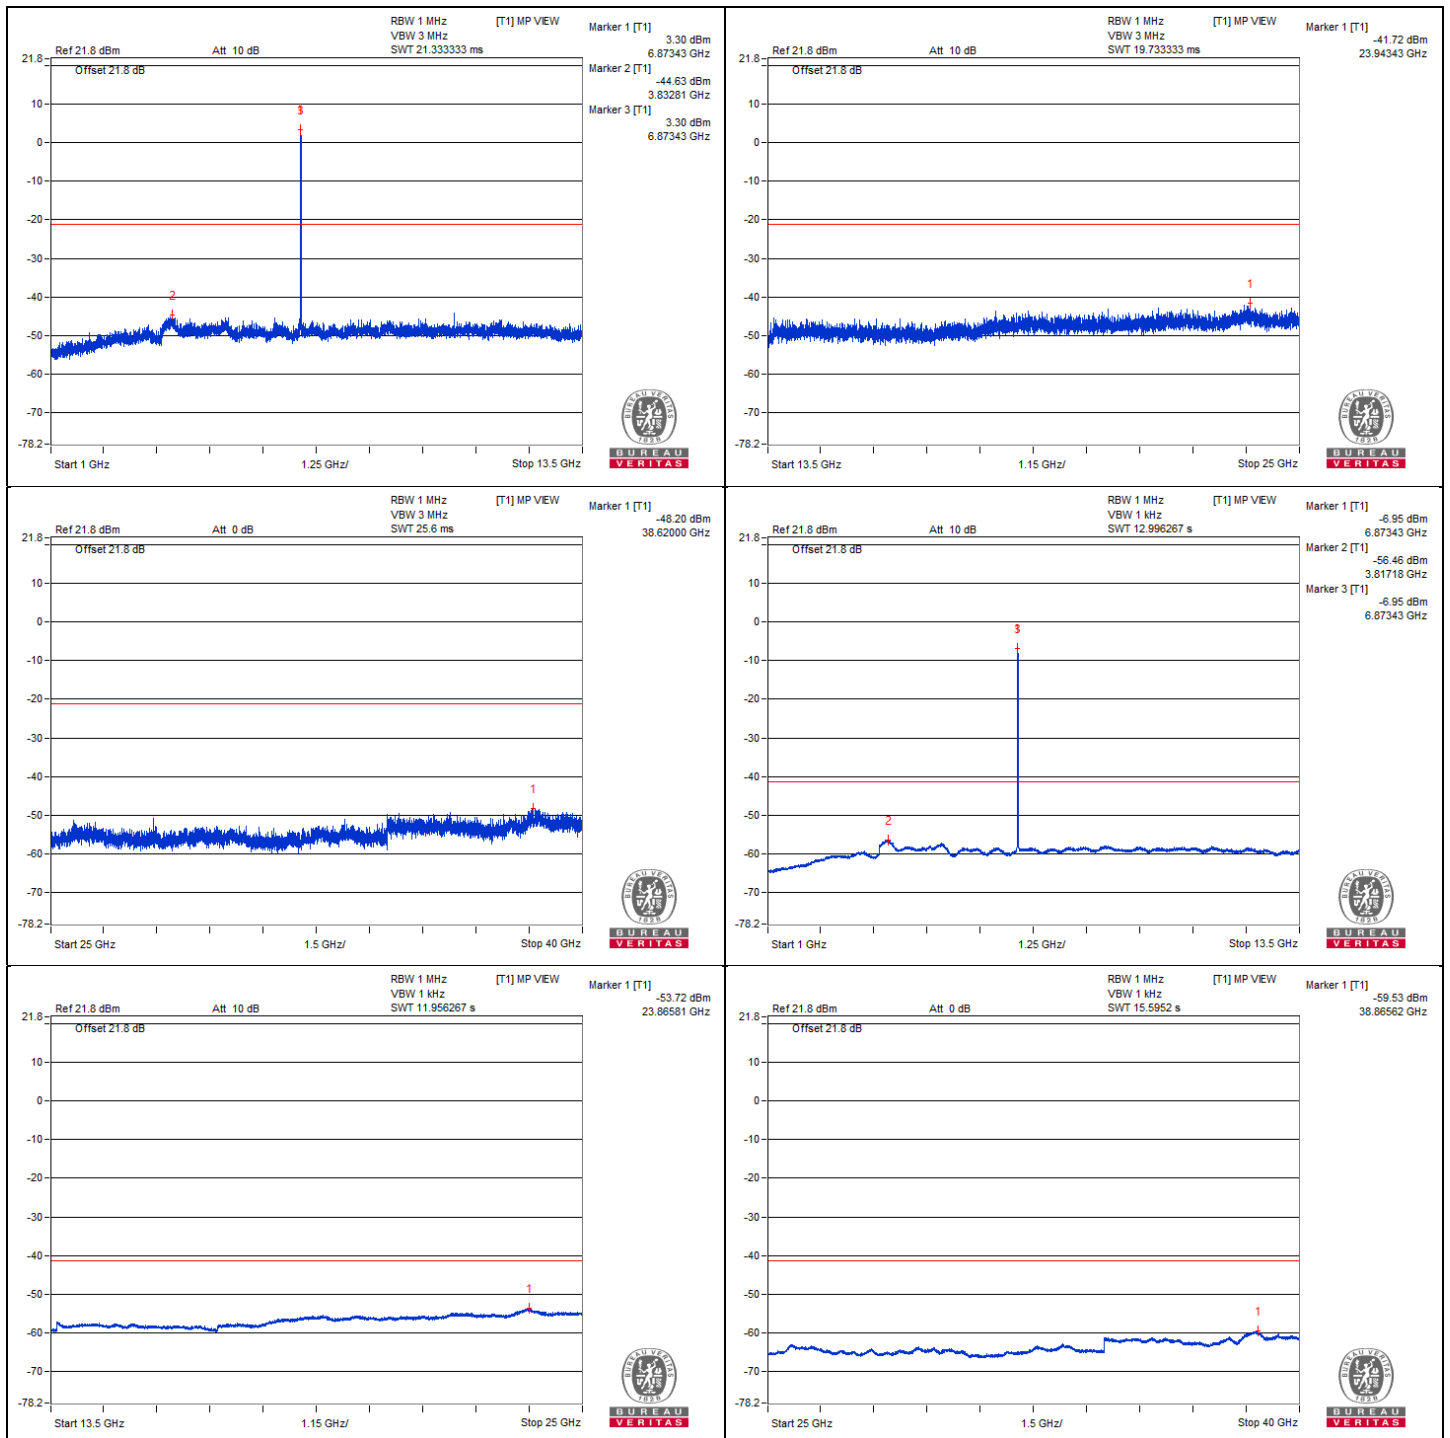




**802.11be (EHT20) - Channel 209**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38850.62	51.72 PK	74	-22.28	-48.46	4.92	-43.54
2	38863.75	40.63 AV	54	-13.37	-59.55	4.92	-54.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

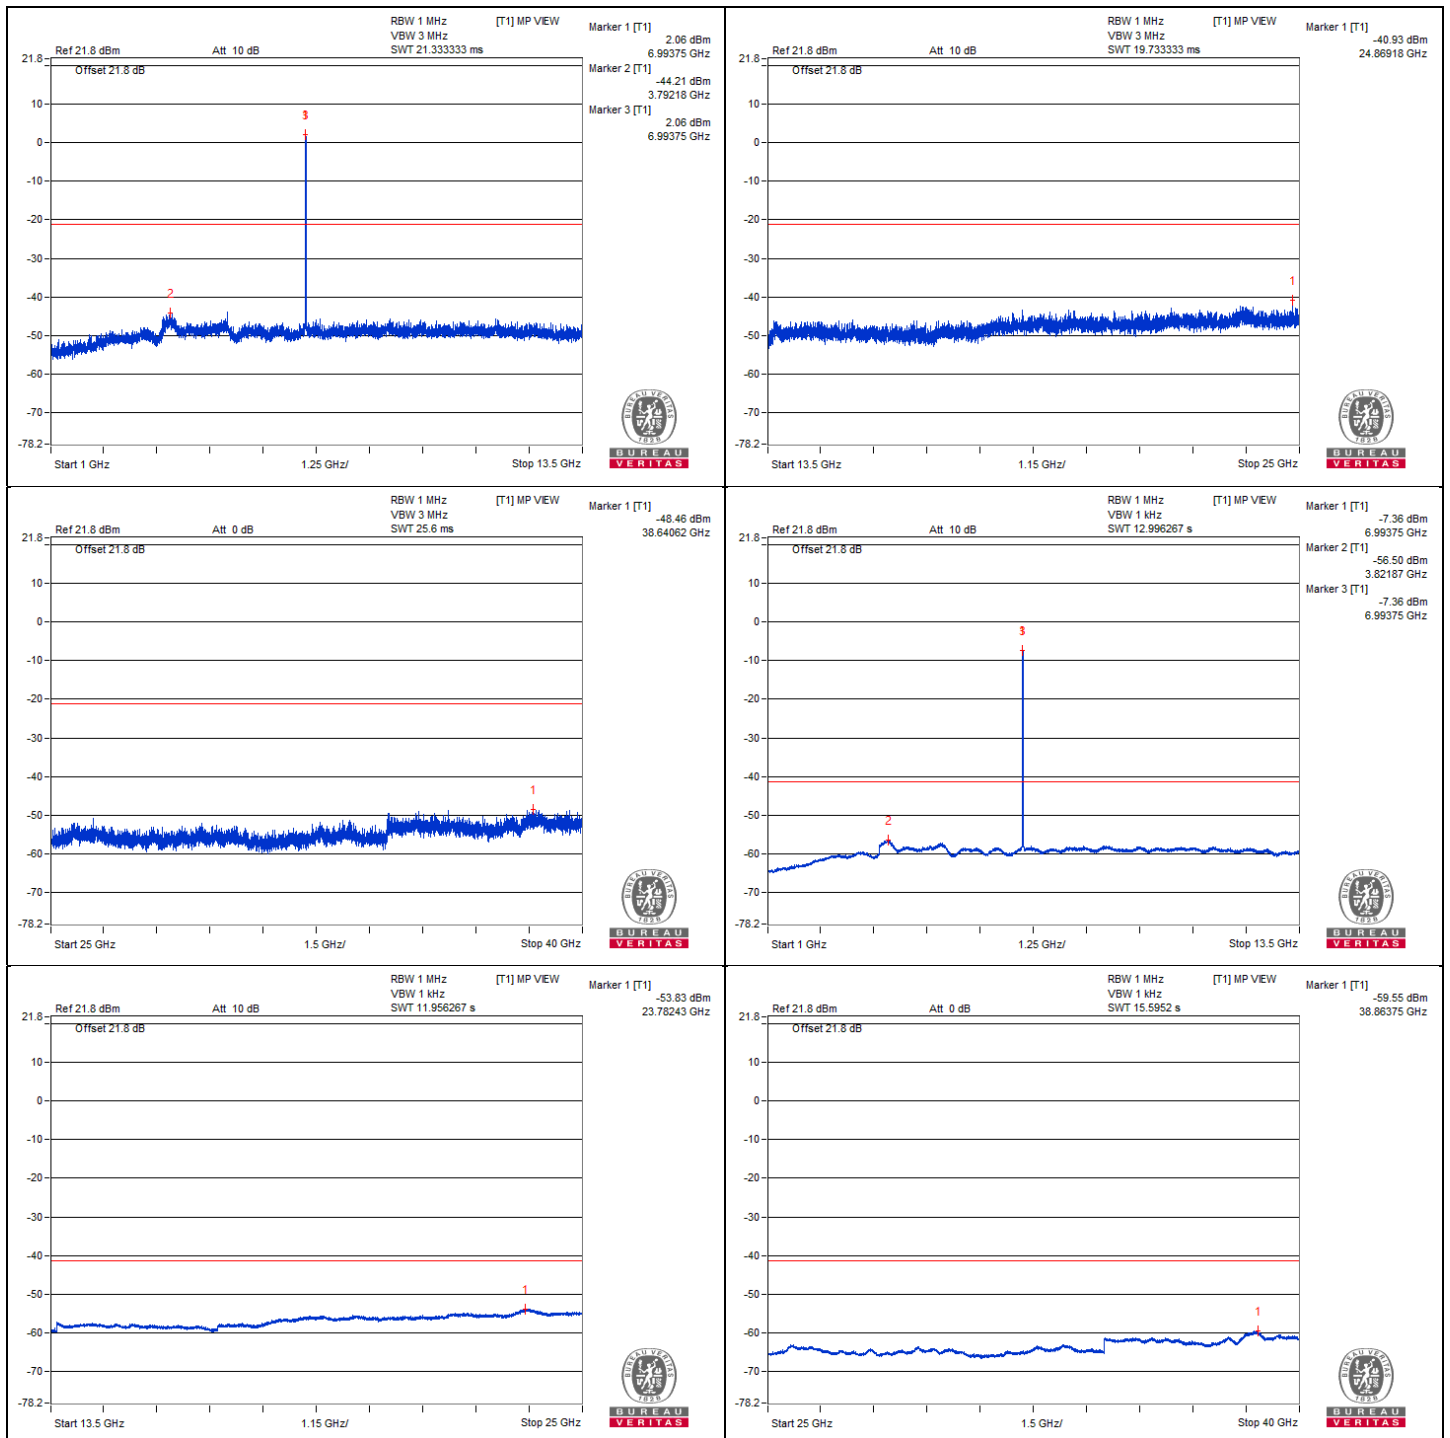


**802.11be (EHT20) - Channel 233**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38818.75	52.27 PK	74	-21.73	-47.91	4.92	-42.99
2	38801.87	40.49 AV	54	-13.51	-59.69	4.92	-54.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

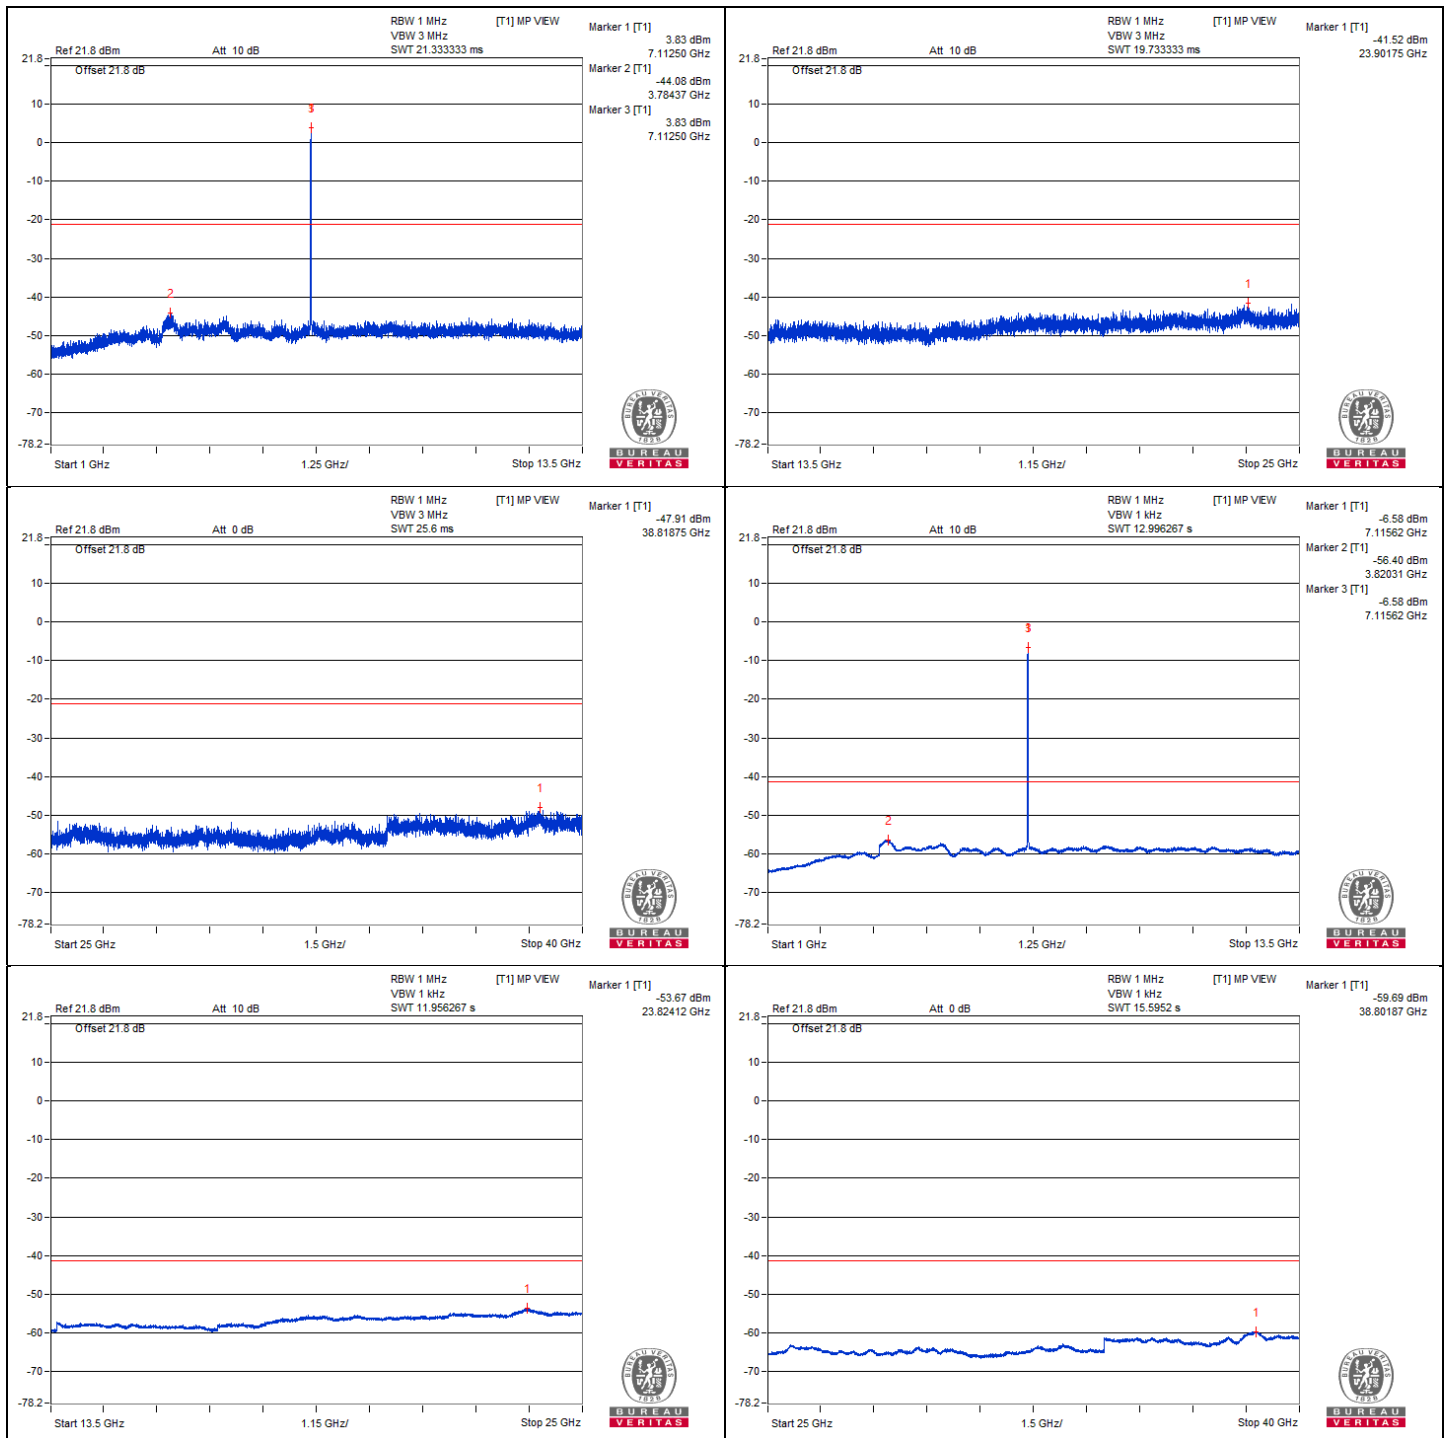




### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	71.03 PK	88.2	-17.17	-28.32	4.09	-24.23
2	#7125	61.8 AV	68.2	-6.4	-37.55	4.09	-33.46

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.
4. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

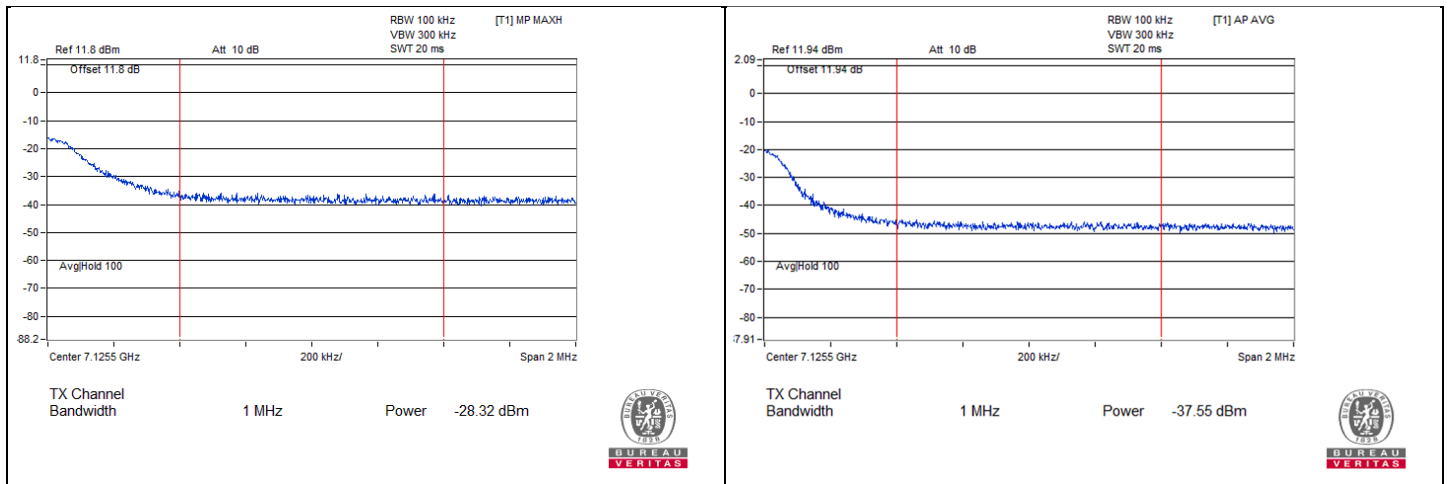


802.11be (EHT40) - Channel 3

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38796.25	51.83 PK	74	-22.17	-48.35	4.92	-43.43
2	38756.87	40.41 AV	54	-13.59	-59.77	4.92	-54.85

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

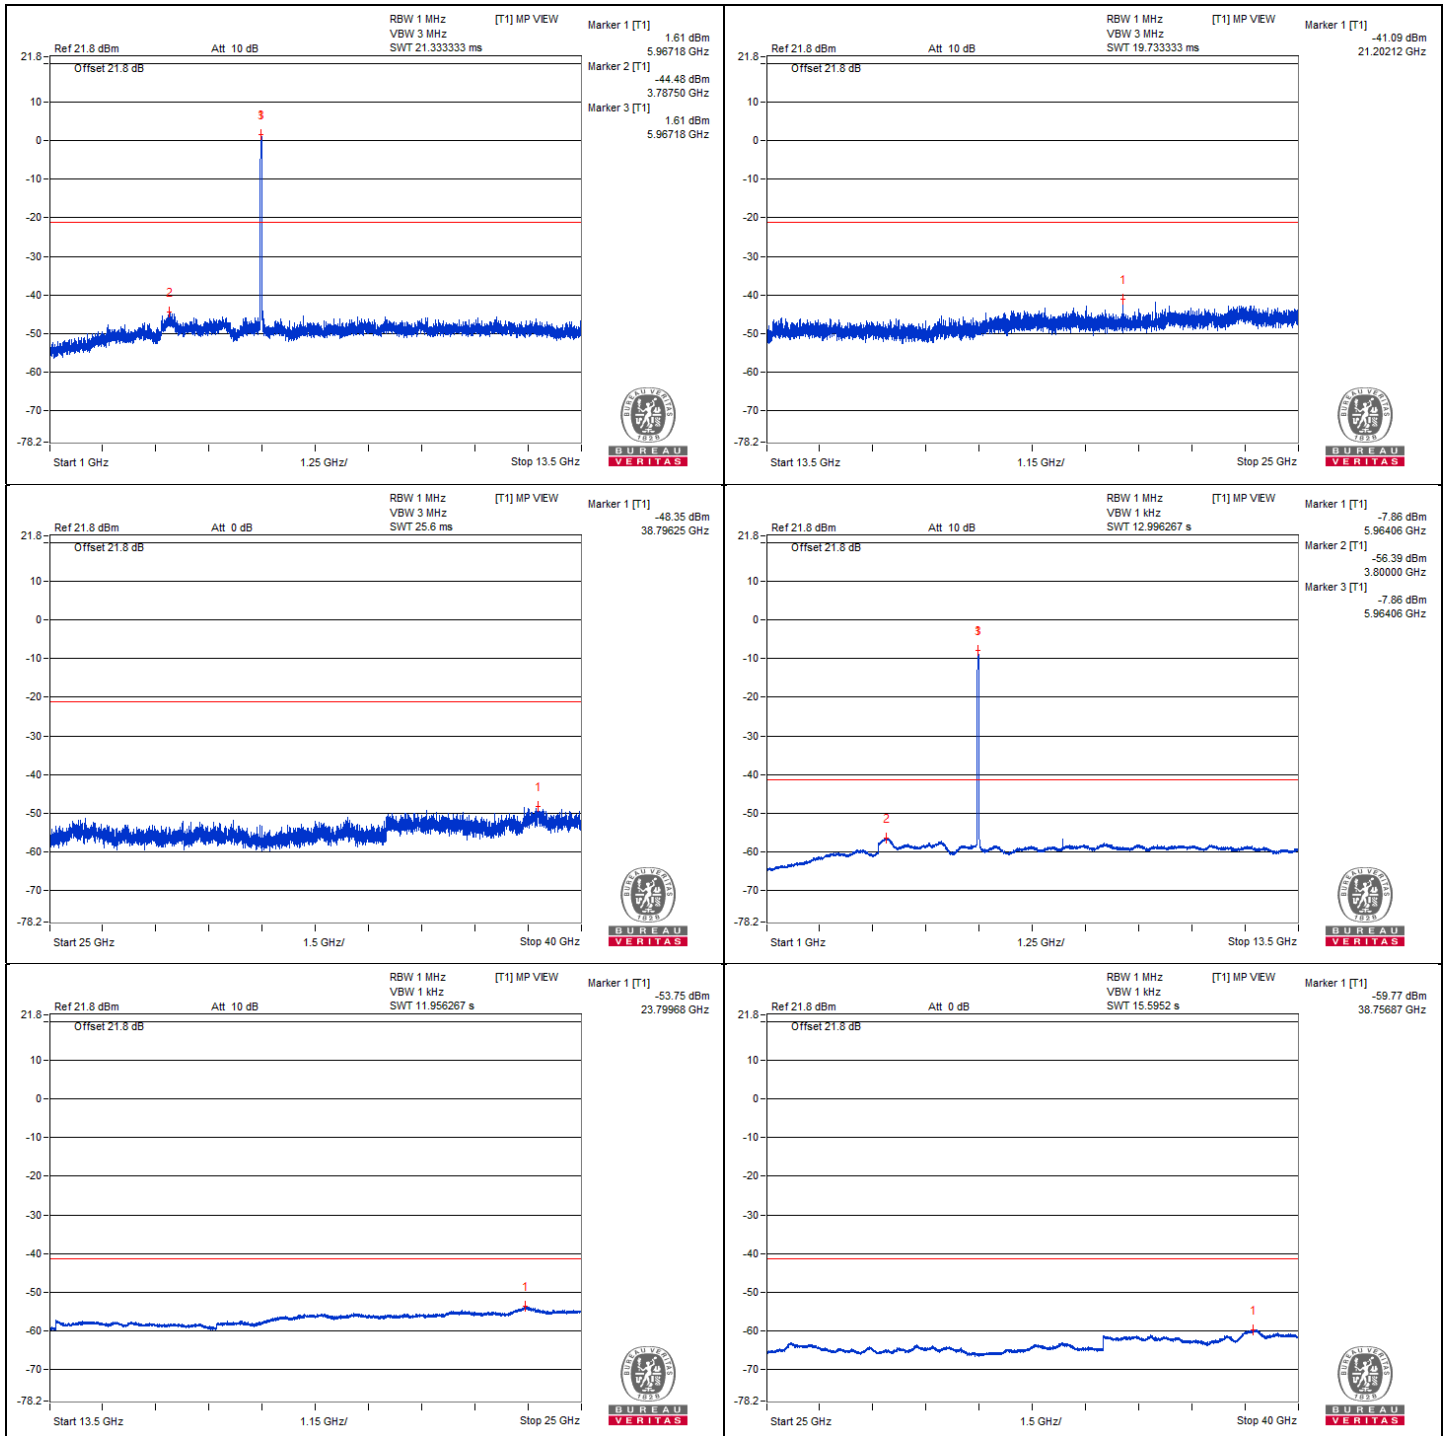


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5924.95	64.77 PK	88.2	-23.43	-35.25	4.76	-30.49
2	#5924.62	52.9 AV	68.2	-15.3	-47.12	4.76	-42.36

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

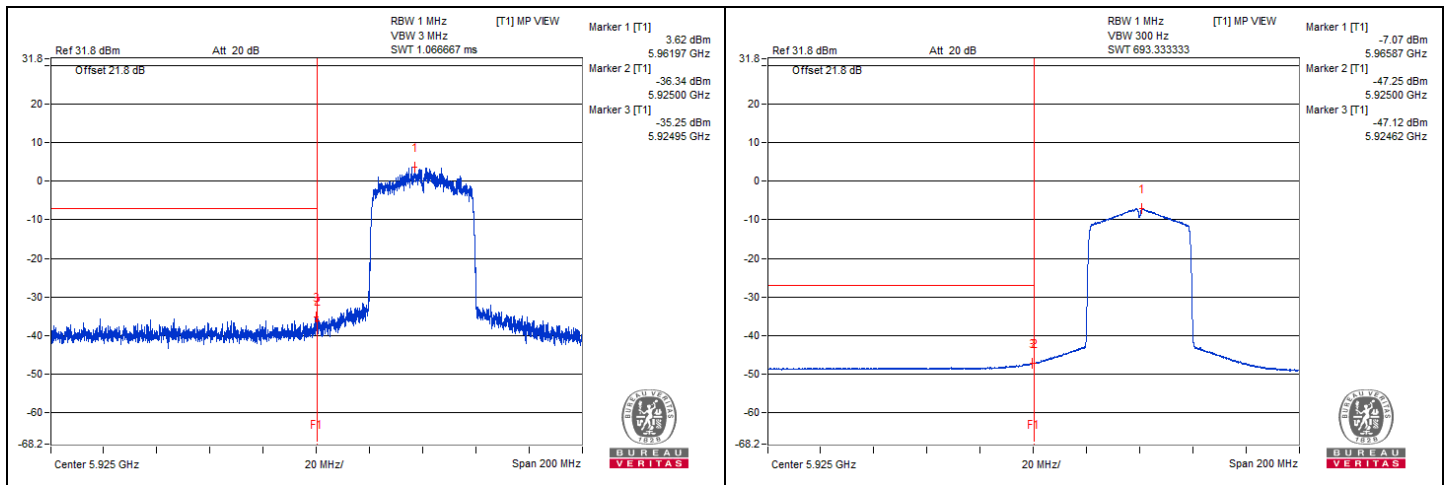


**802.11be (EHT40) - Channel 43**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38821.87	52.68 PK	74	-21.32	-47.5	4.92	-42.58
2	38783.12	40.58 AV	54	-13.42	-59.6	4.92	-54.68

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

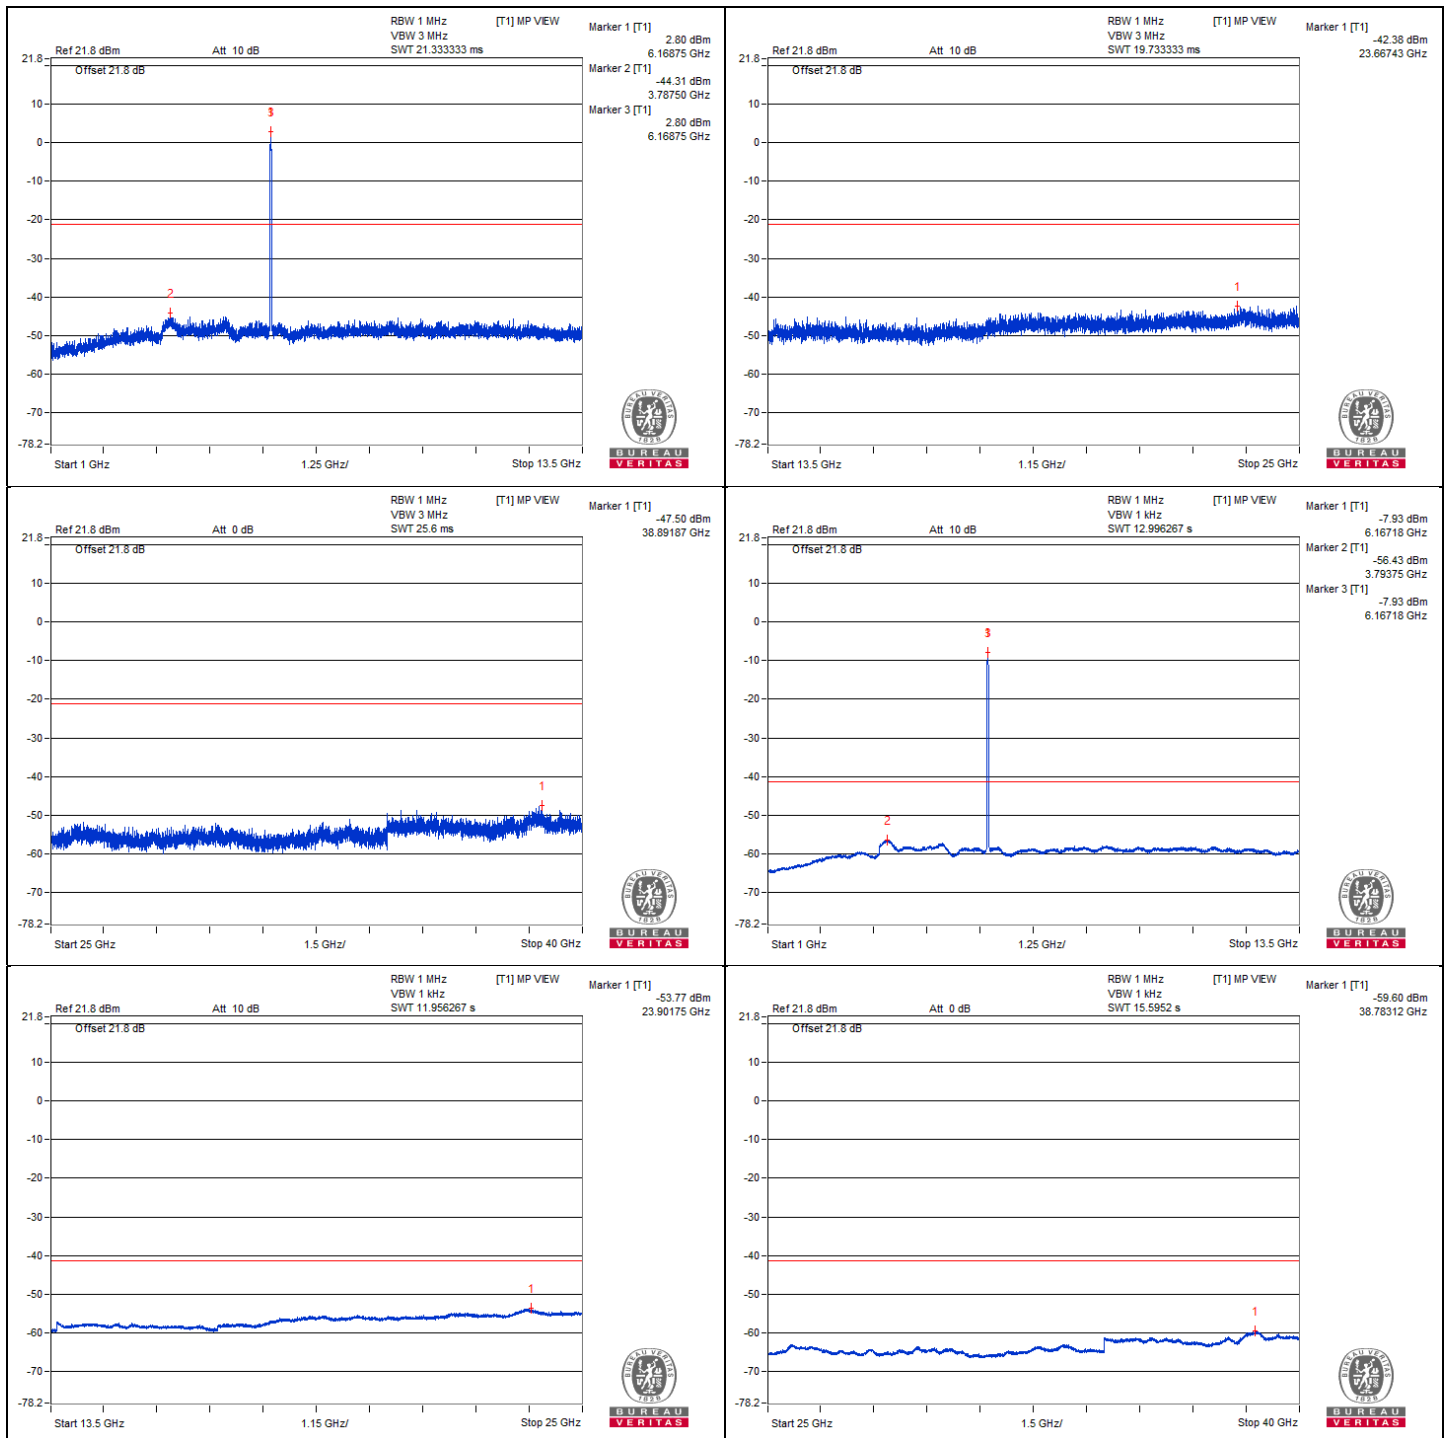


**802.11be (EHT40) - Channel 91**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38820	52.78 PK	74	-21.22	-47.4	4.92	-42.48
2	38783.12	40.6 AV	54	-13.4	-59.58	4.92	-54.66

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

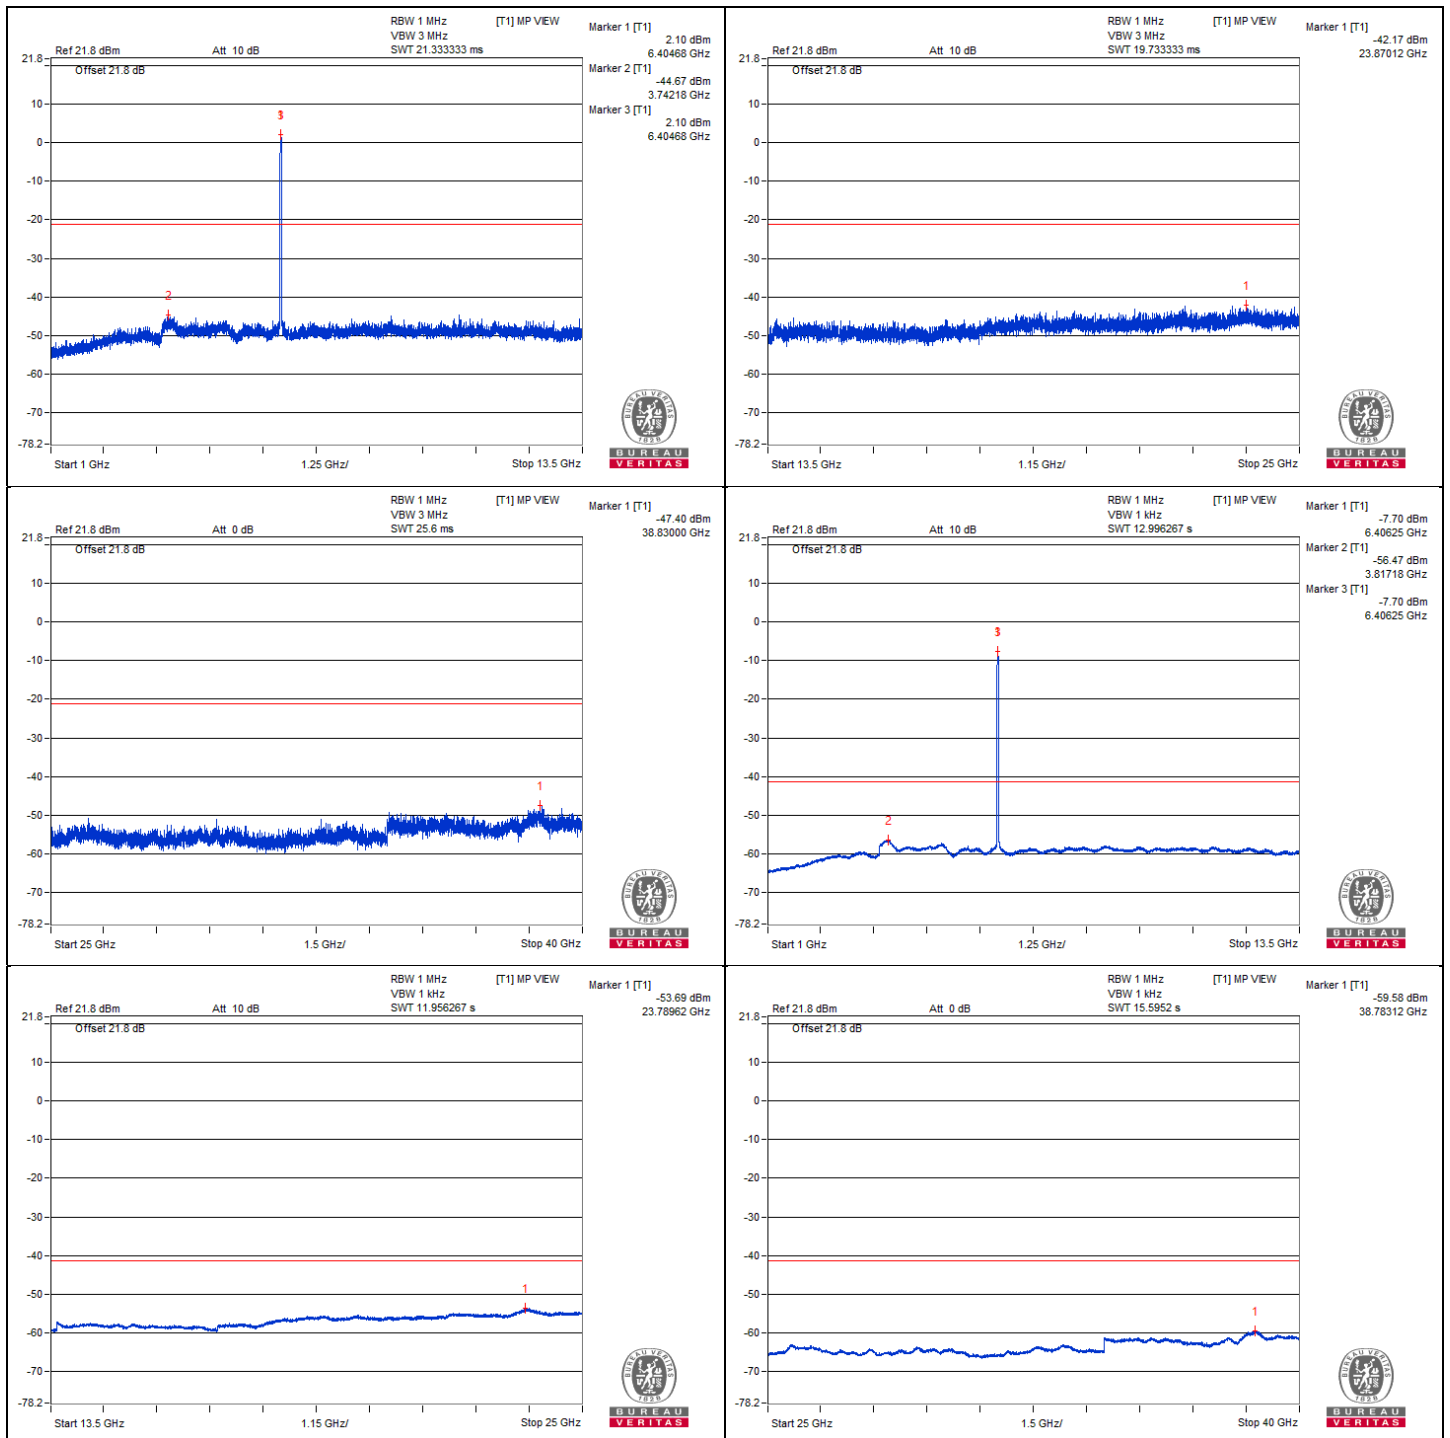


**802.11be (EHT40) - Channel 99**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38809.37	52.59 PK	74	-21.41	-47.59	4.92	-42.67
2	38782.5	40.58 AV	54	-13.42	-59.6	4.92	-54.68

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

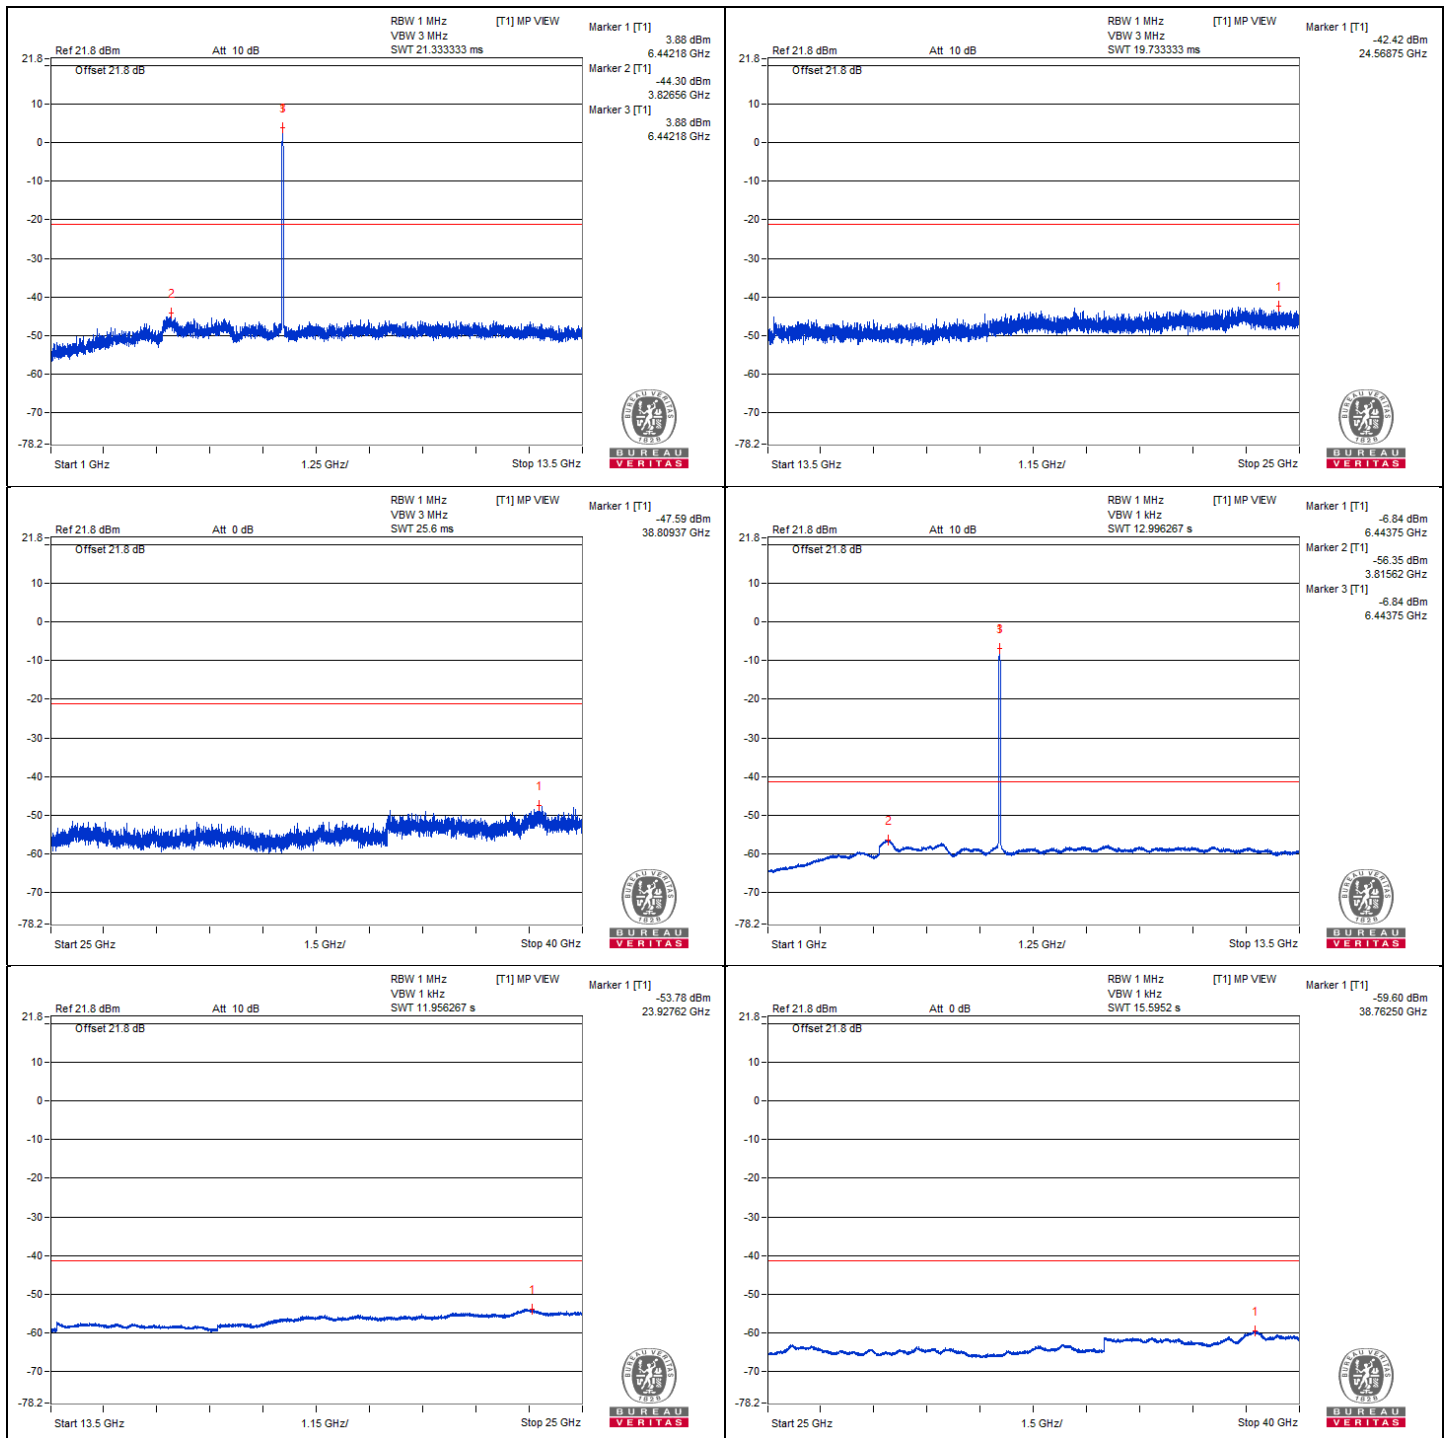




**802.11be (EHT40) - Channel 107**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38793.75	52.17 PK	74	-21.83	-48.01	4.92	-43.09
2	38820.62	40.56 AV	54	-13.44	-59.62	4.92	-54.70

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

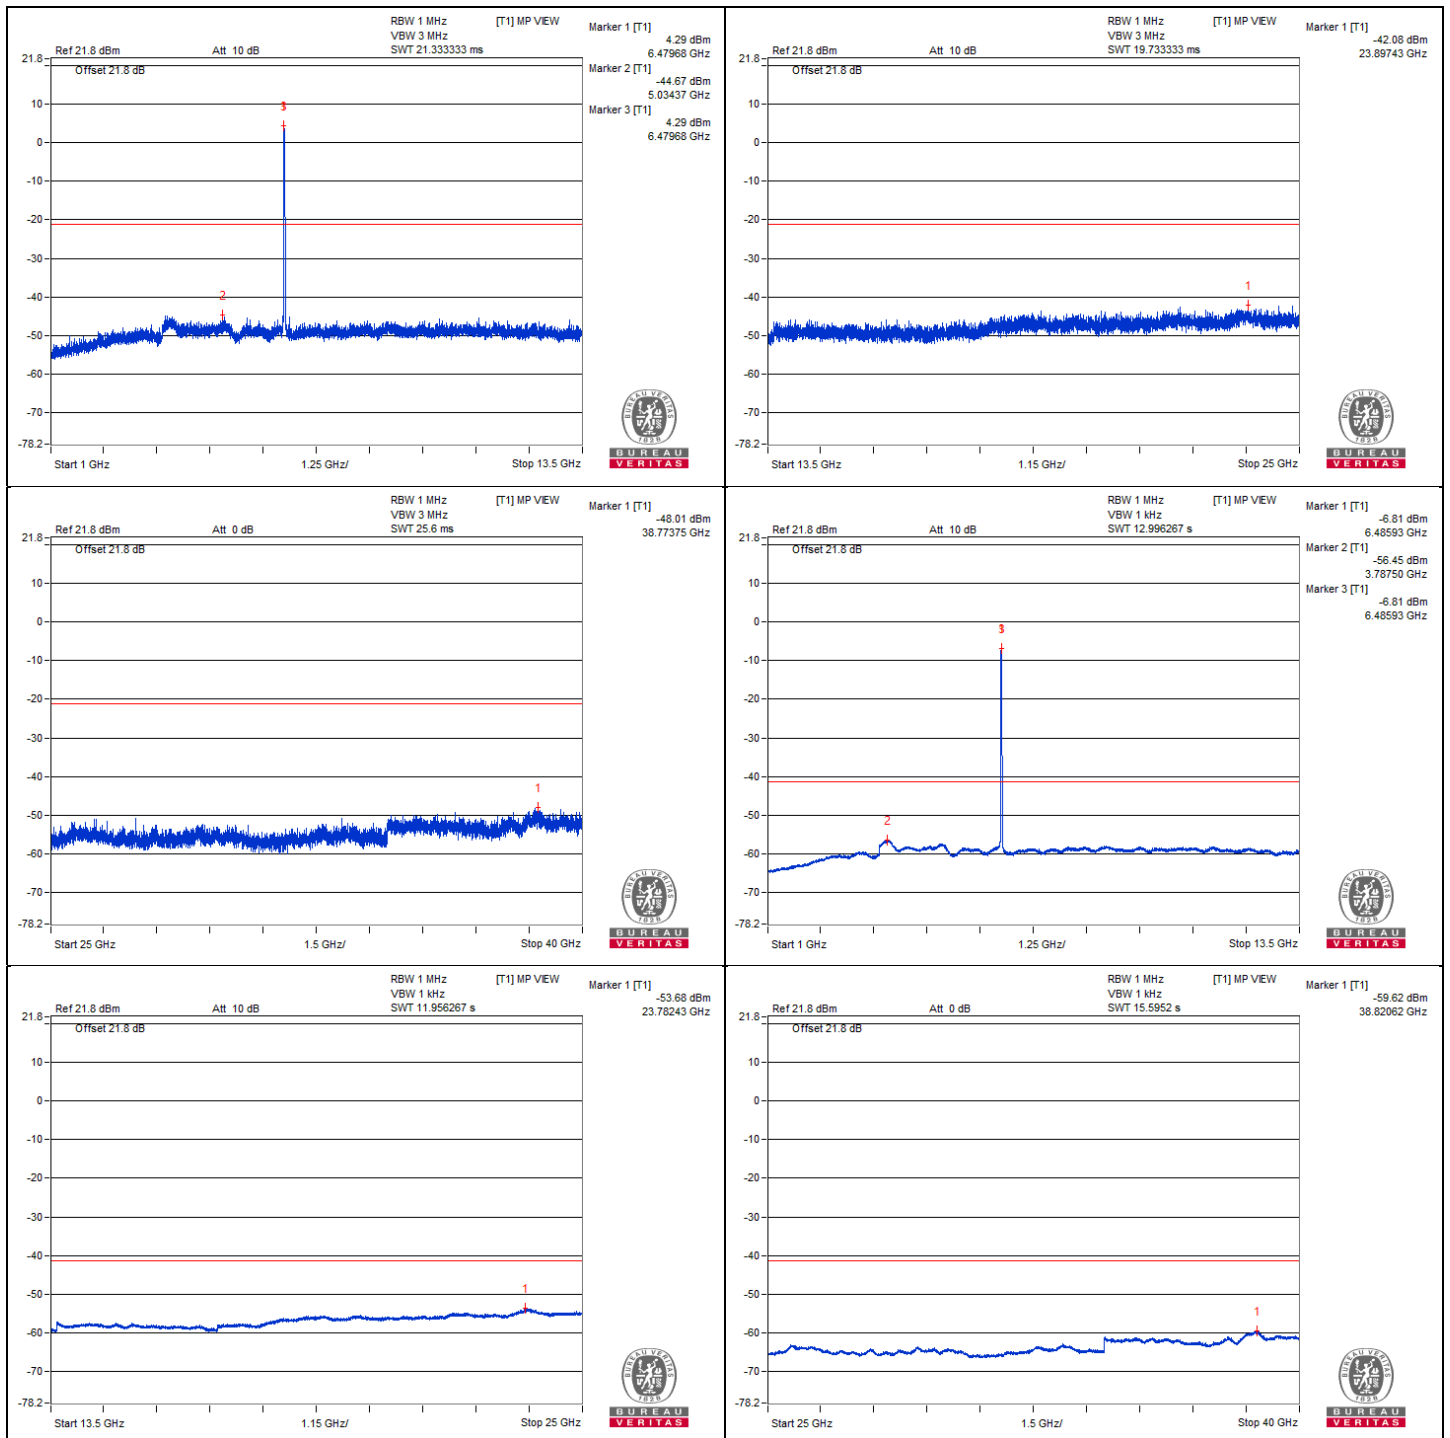


**802.11be (EHT40) - Channel 115**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38760	52.4 PK	74	-21.6	-47.78	4.92	-42.86
2	38779.37	40.58 AV	54	-13.42	-59.6	4.92	-54.68

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

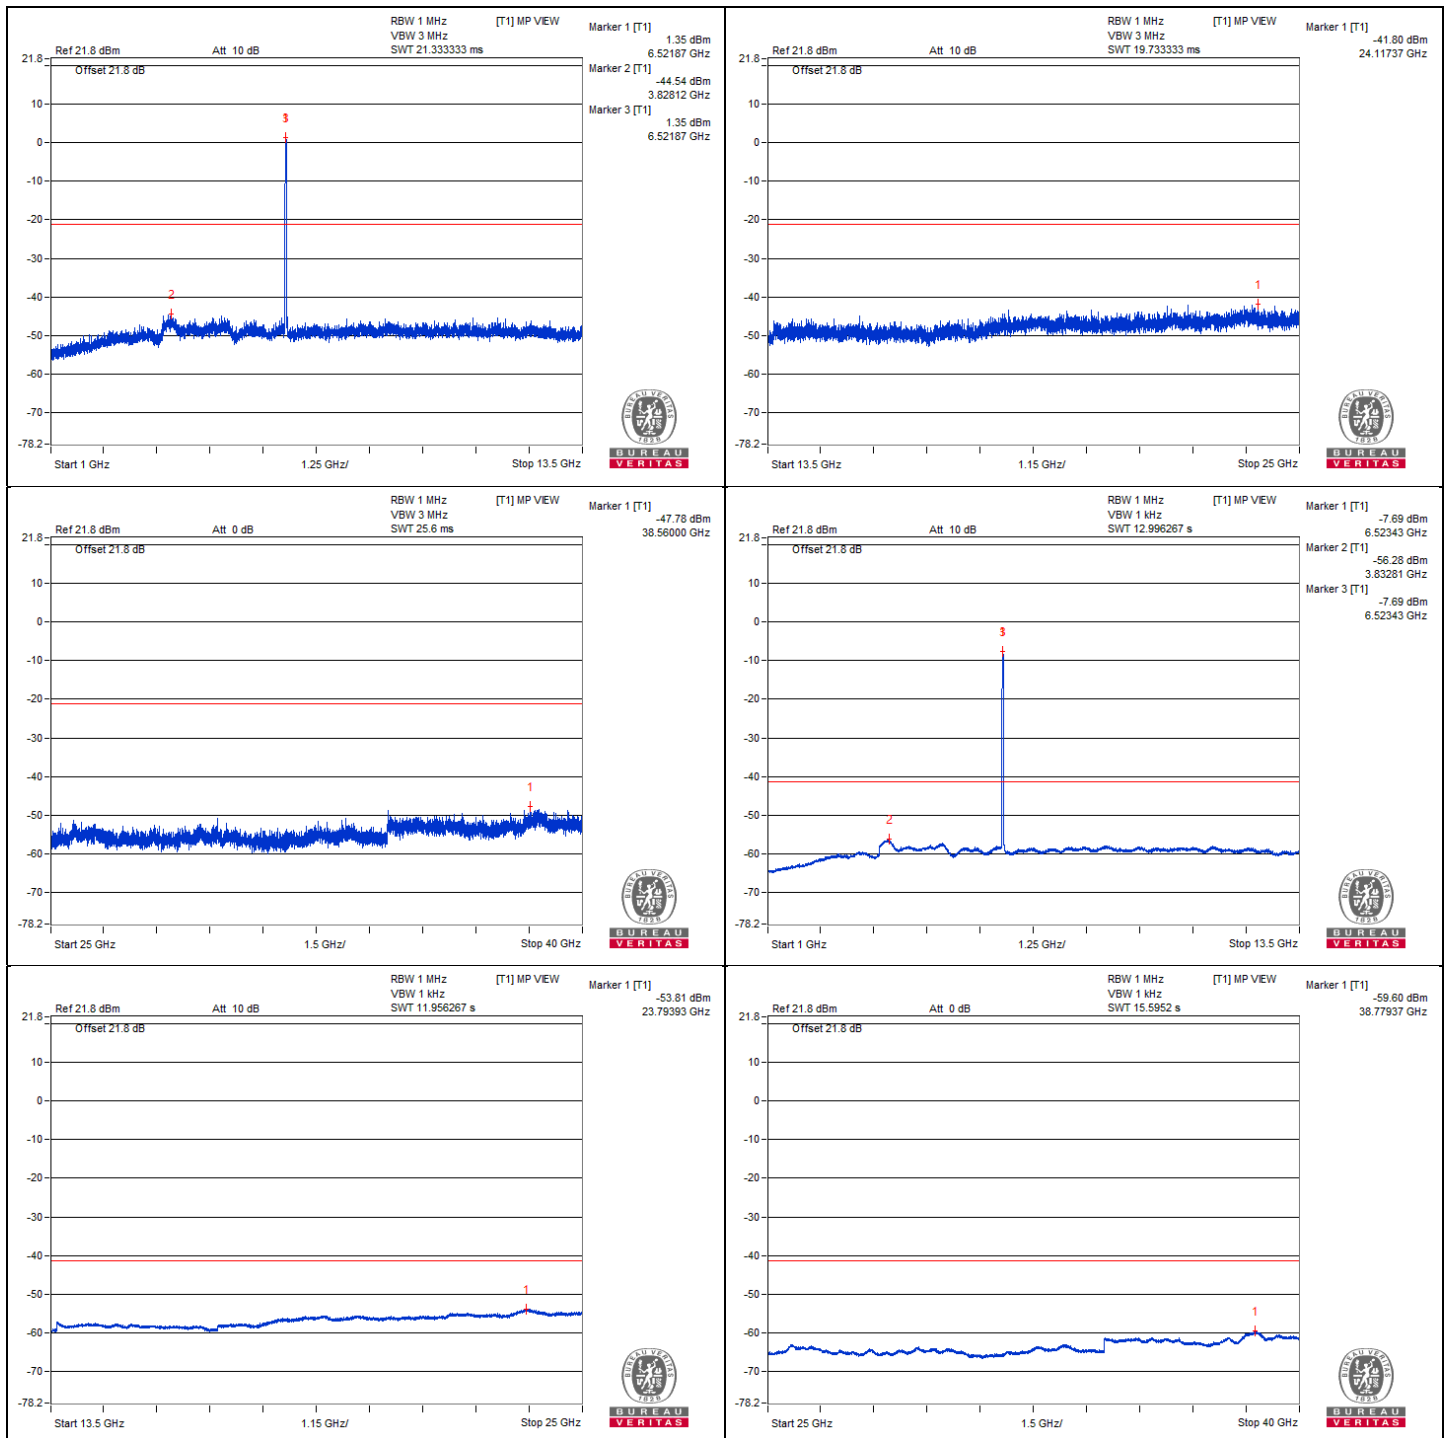


**802.11be (EHT40) - Channel 123**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38781.87	52.37 PK	74	-21.63	-47.81	4.92	-42.89
2	38796.25	40.63 AV	54	-13.37	-59.55	4.92	-54.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

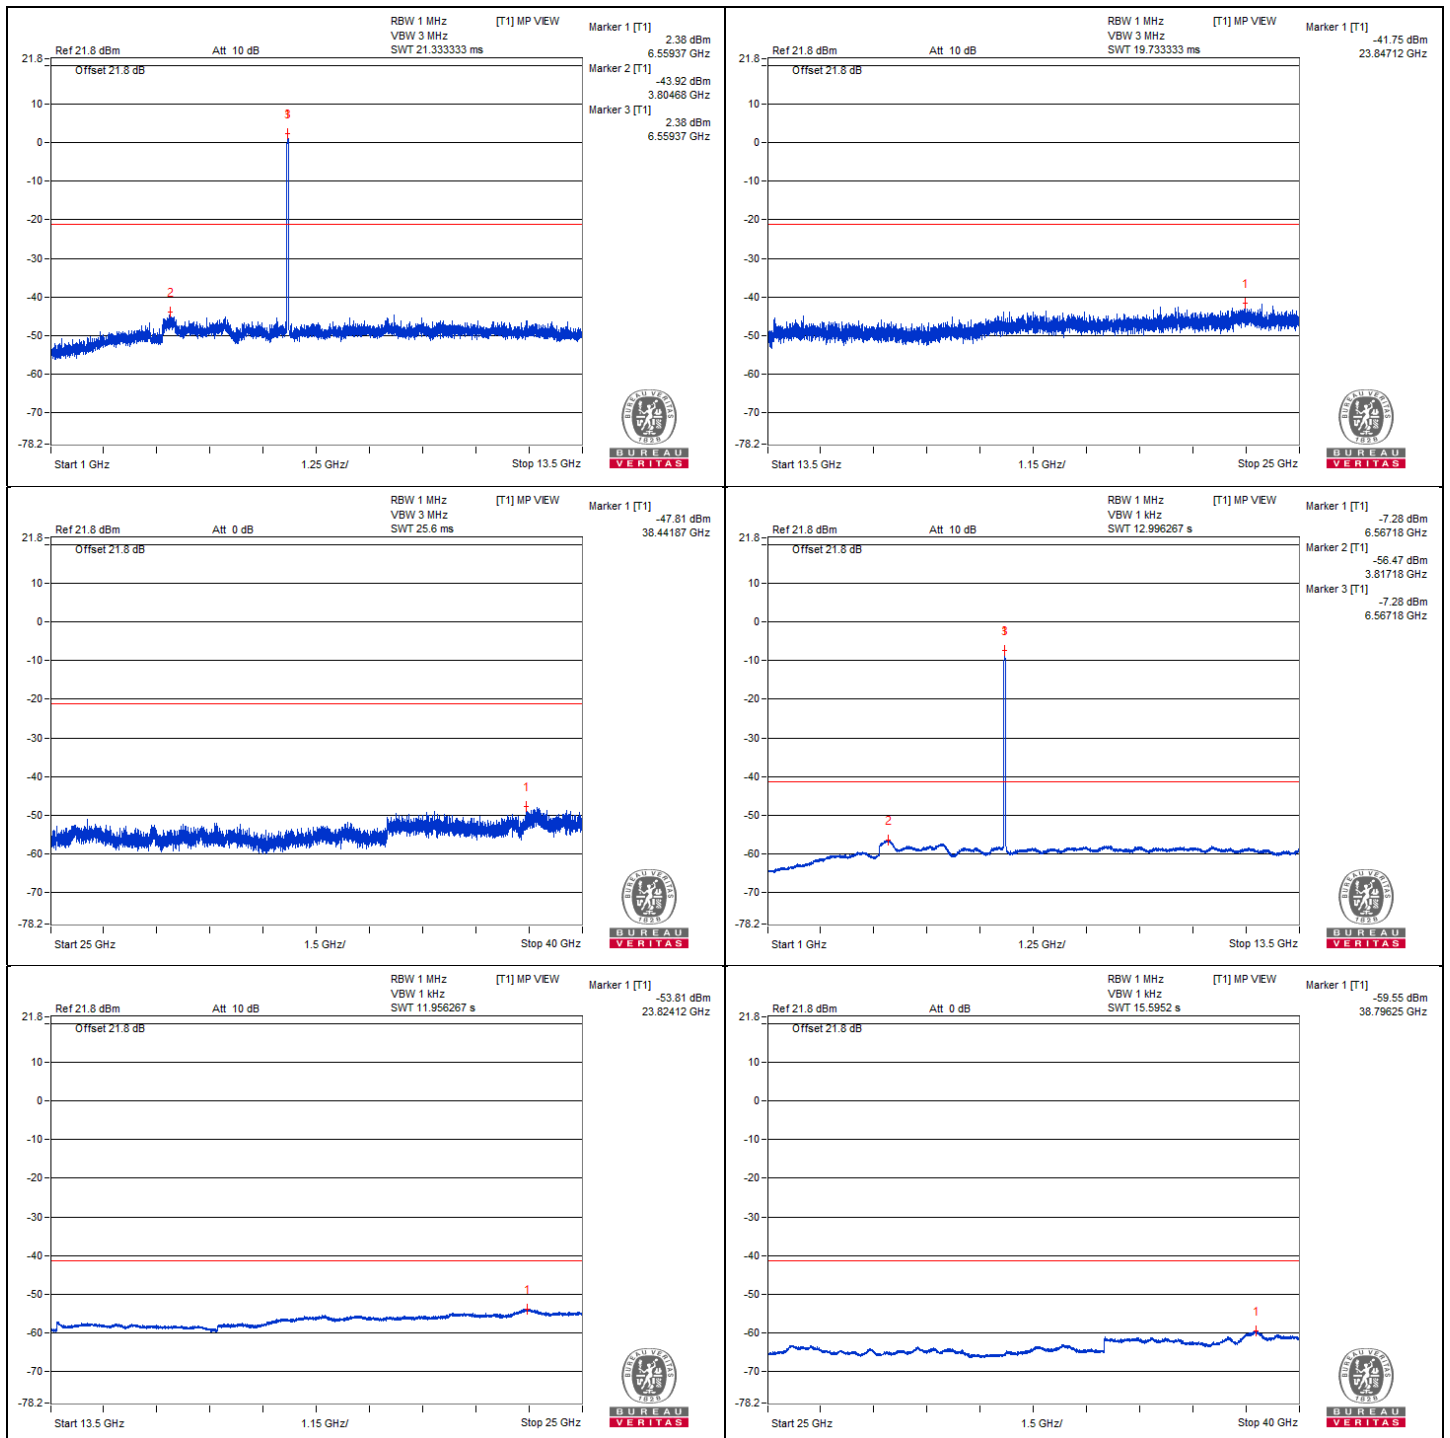


**802.11be (EHT40) - Channel 155**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38807.5	51.9 PK	74	-22.1	-48.28	4.92	-43.36
2	38816.87	40.59 AV	54	-13.41	-59.59	4.92	-54.67

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

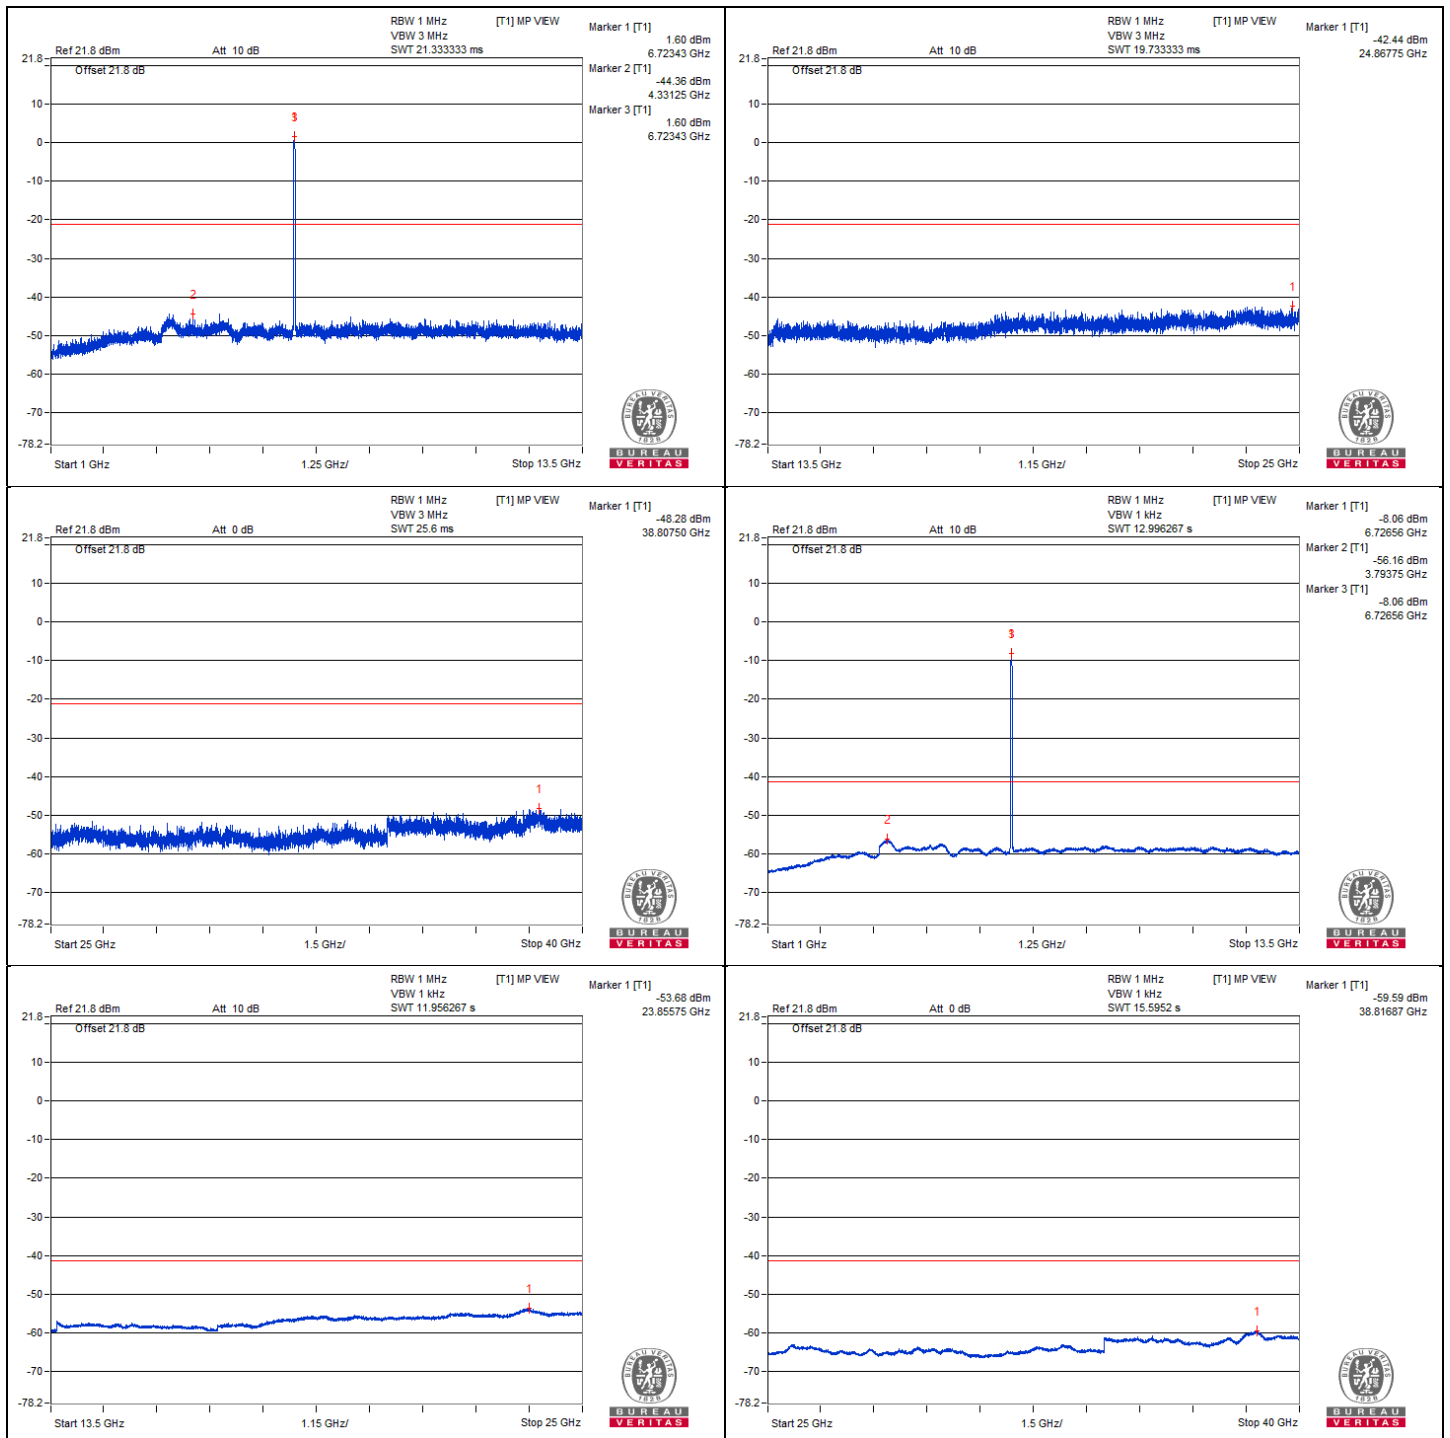


**802.11be (EHT40) - Channel 179**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38846.87	52.28 PK	74	-21.72	-47.9	4.92	-42.98
2	38825.62	40.6 AV	54	-13.4	-59.58	4.92	-54.66

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

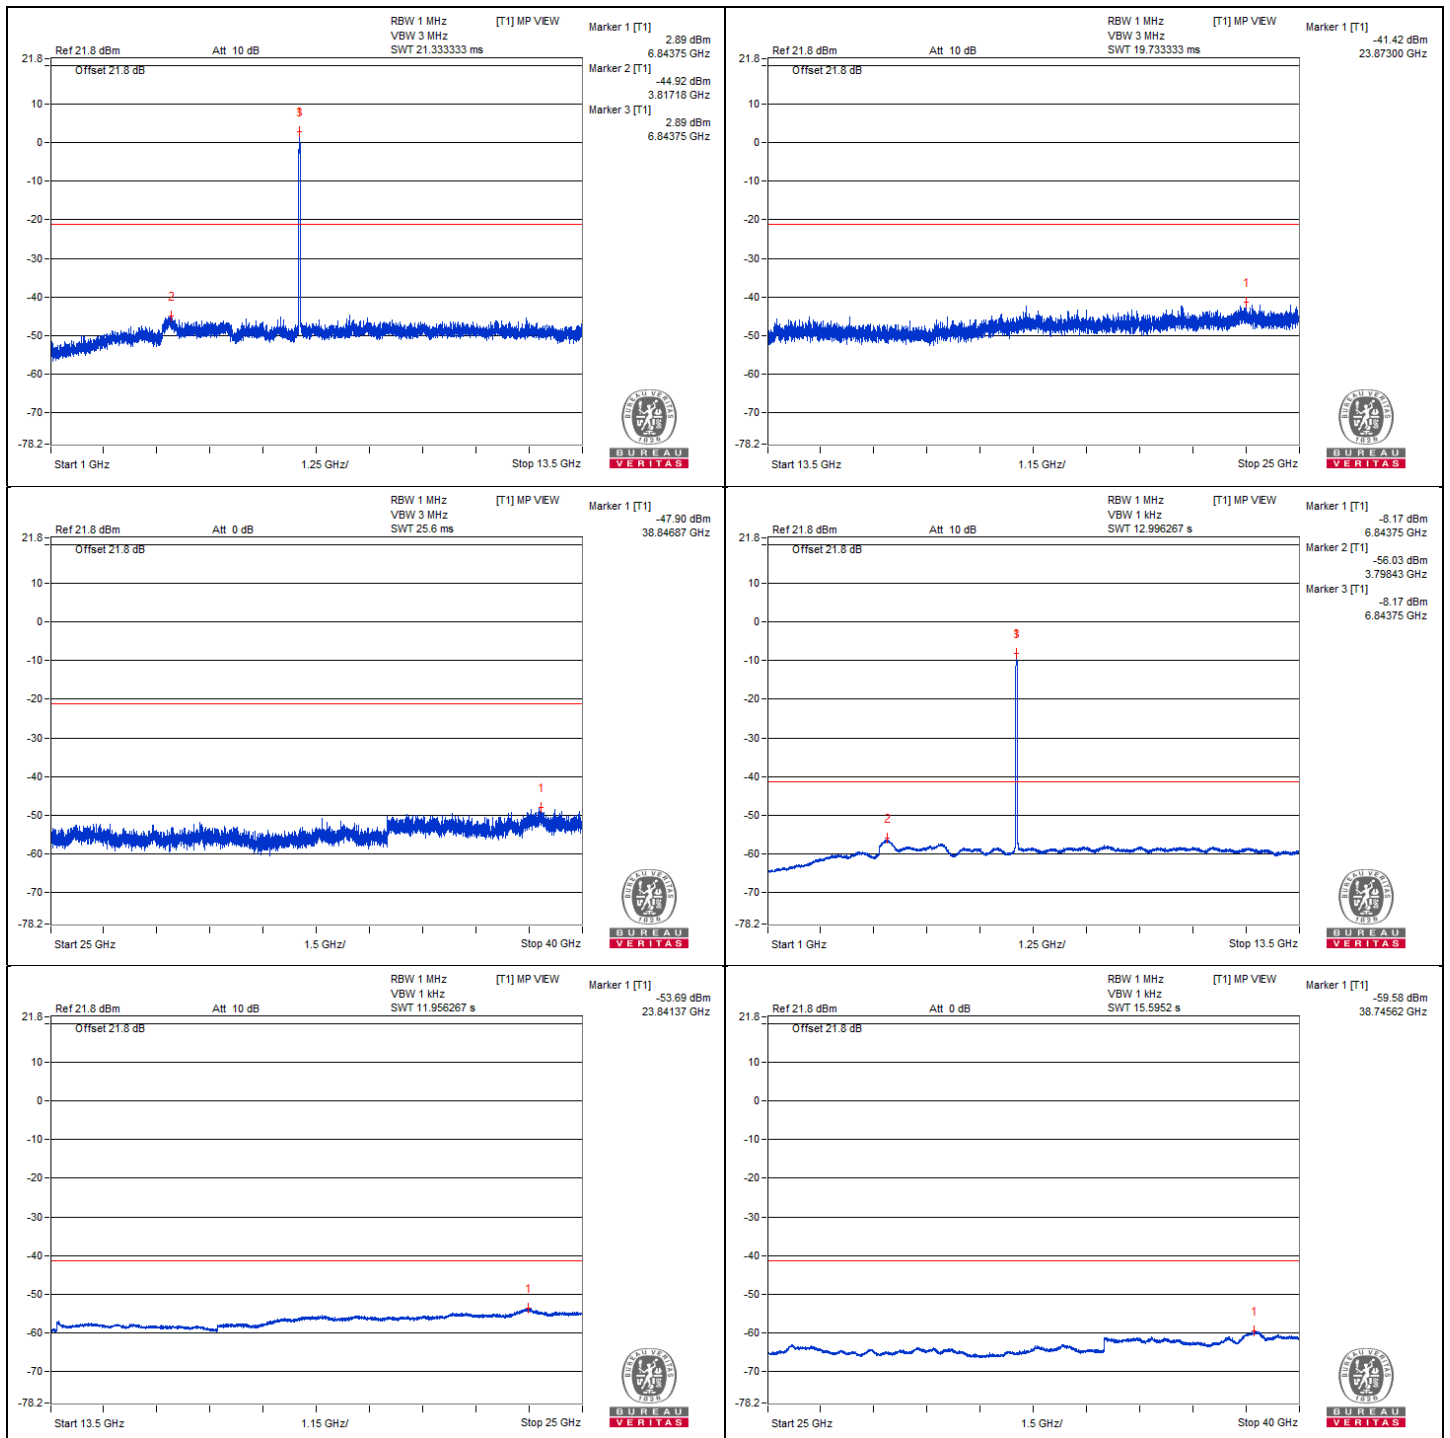


**802.11be (EHT40) - Channel 187**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38711.25	52.84 PK	74	-21.16	-47.34	4.92	-42.42
2	38710	40.67 AV	54	-13.33	-59.51	4.92	-54.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

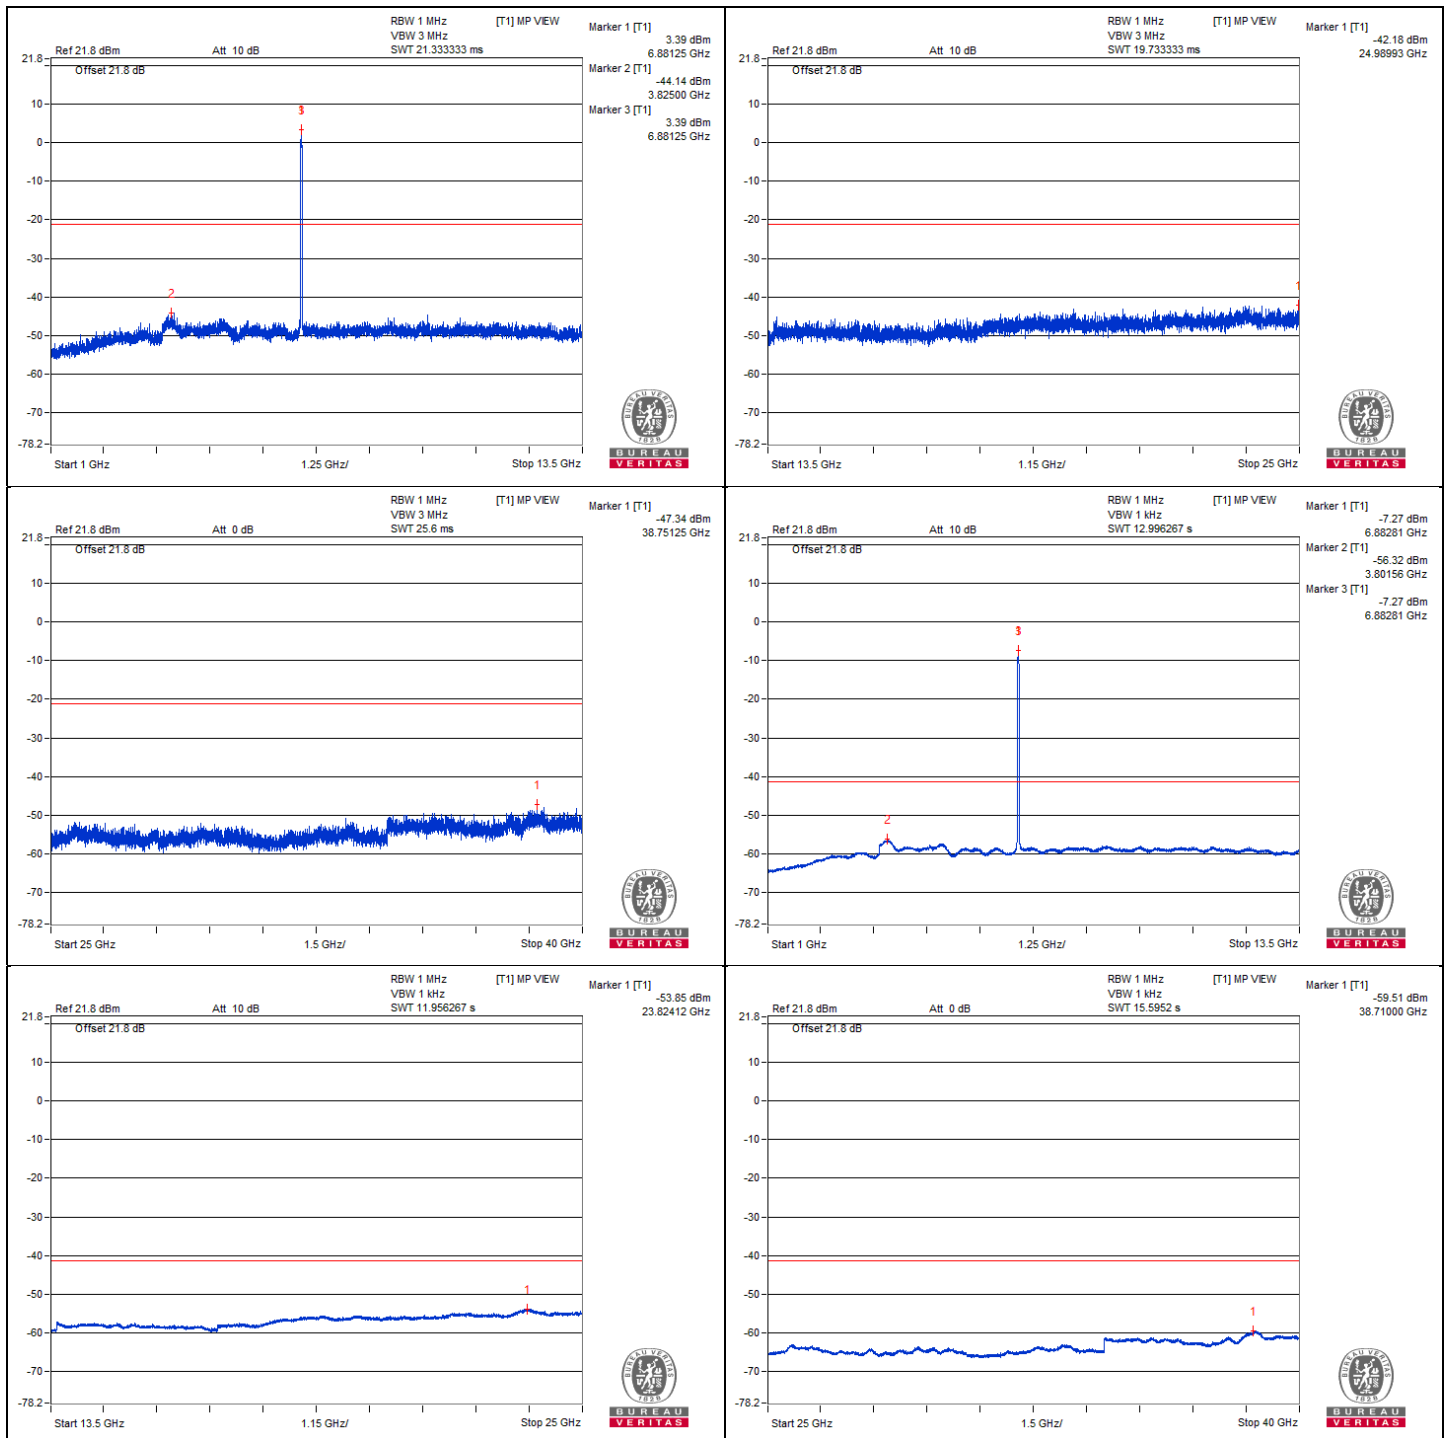




### 802.11be (EHT40) - Channel 211 Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38776.87	53.56 PK	74	-20.44	-46.62	4.92	-41.70
2	38801.87	40.6 AV	54	-13.4	-59.58	4.92	-54.66

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

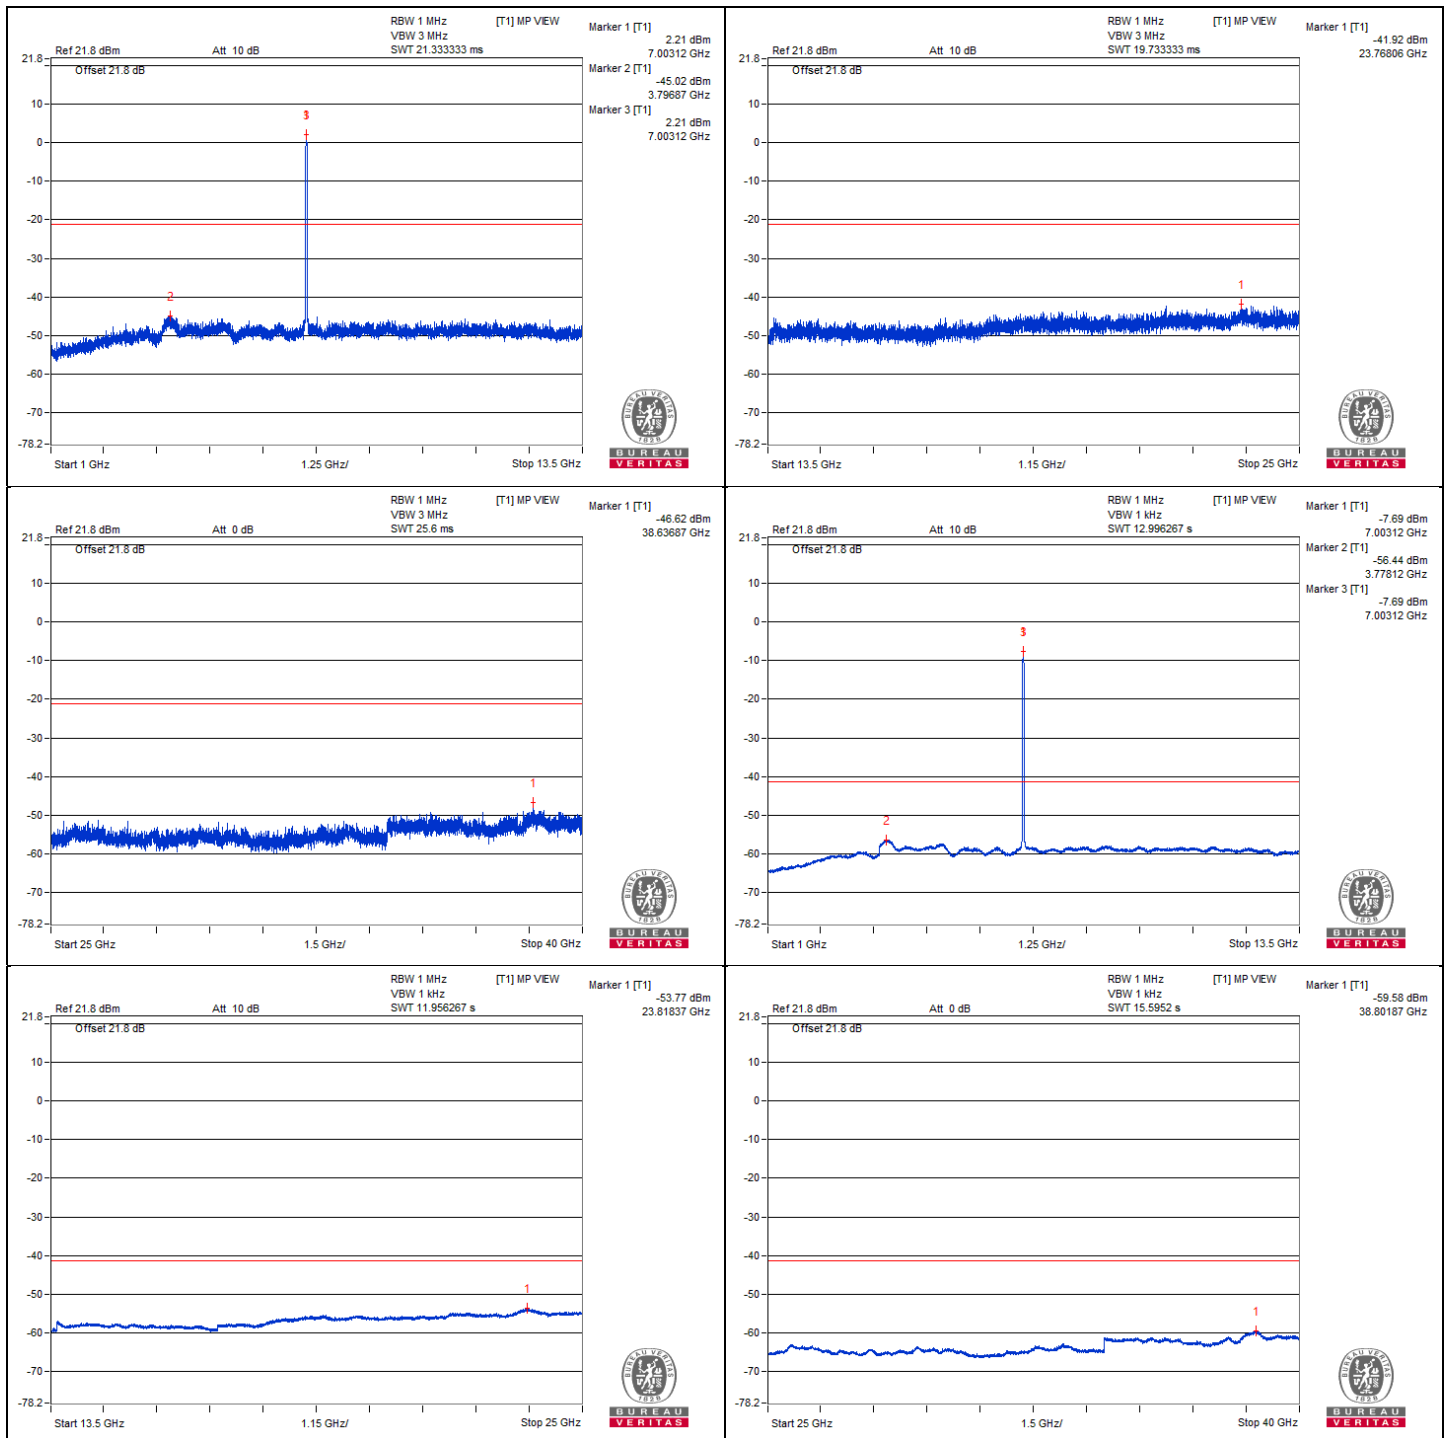


**802.11be (EHT40) - Channel 227**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38715.62	51.95 PK	74	-22.05	-48.23	4.92	-43.31
2	38747.5	40.63 AV	54	-13.37	-59.55	4.92	-54.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

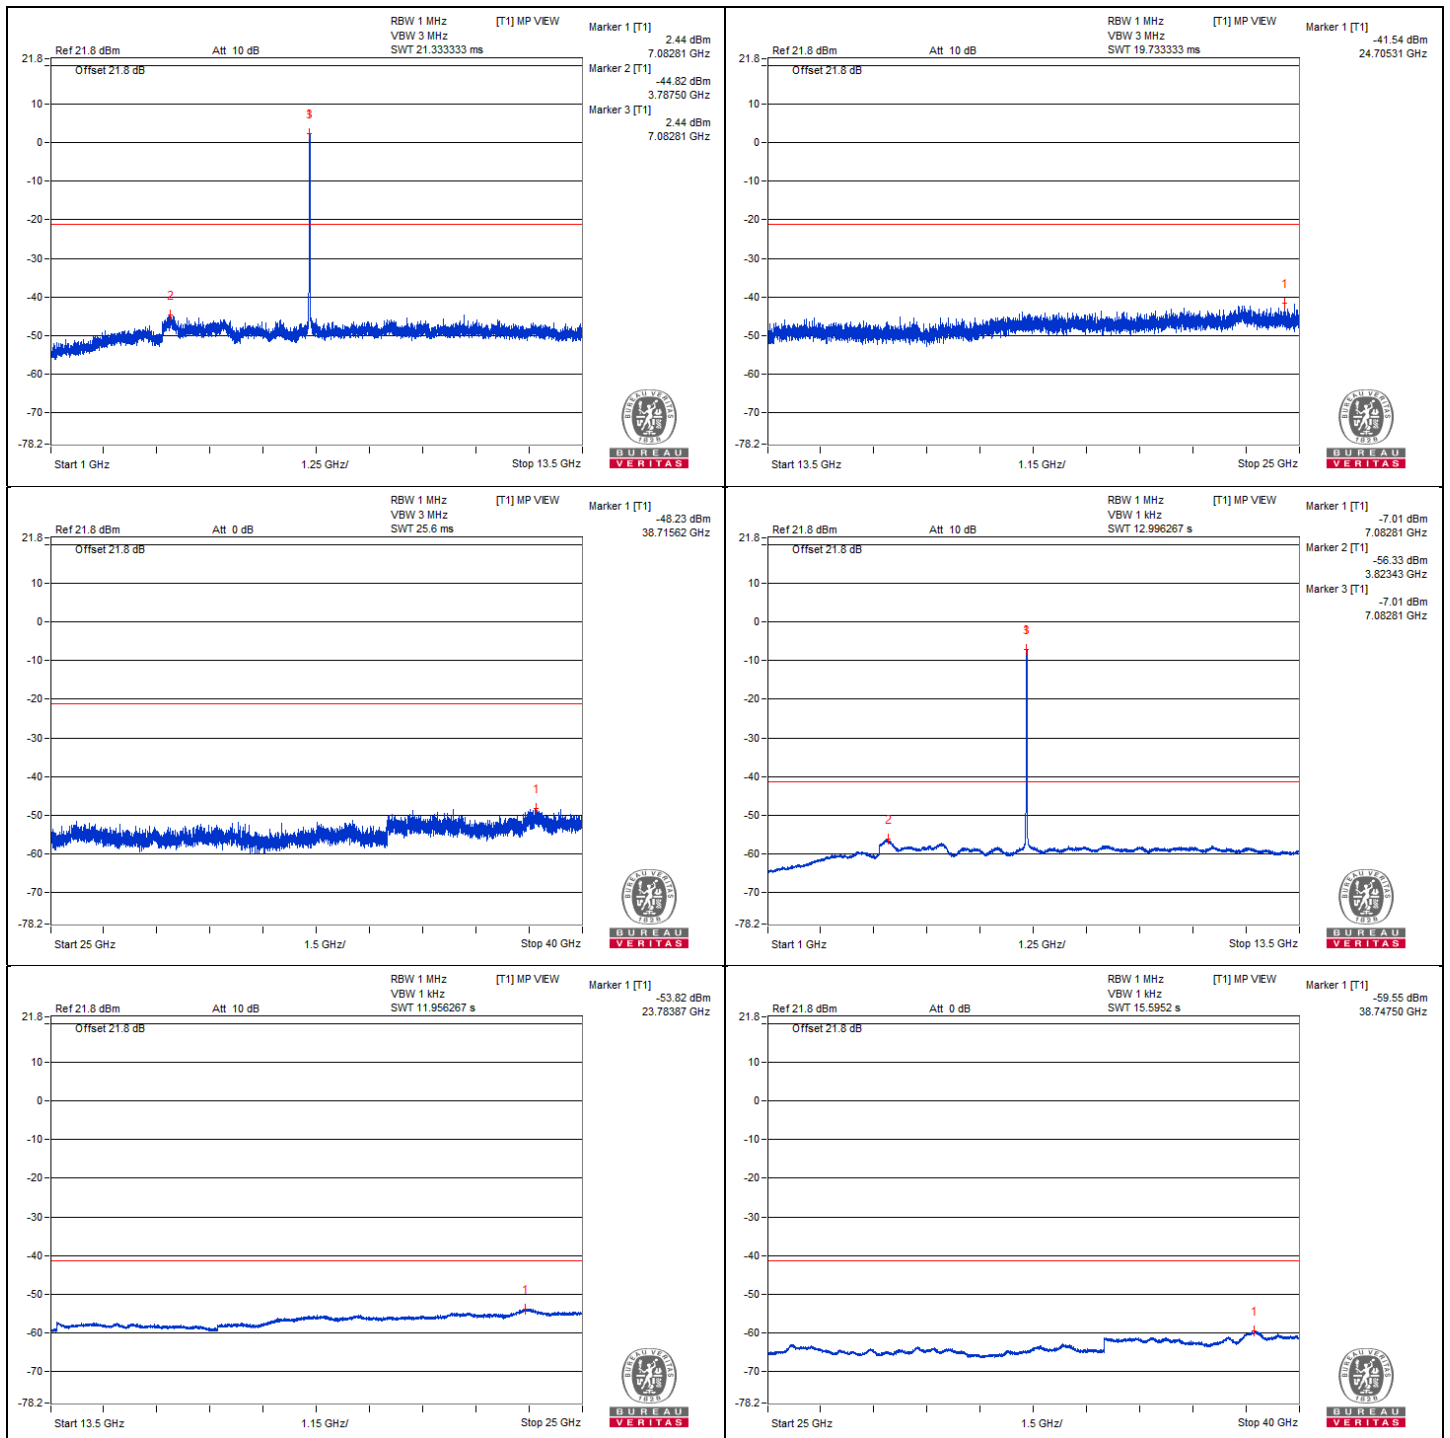






### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7156.42	64.3 PK	88.2	-23.9	-35.05	4.09	-30.96
2	#7125	52.43 AV	68.2	-15.77	-46.92	4.09	-42.83

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

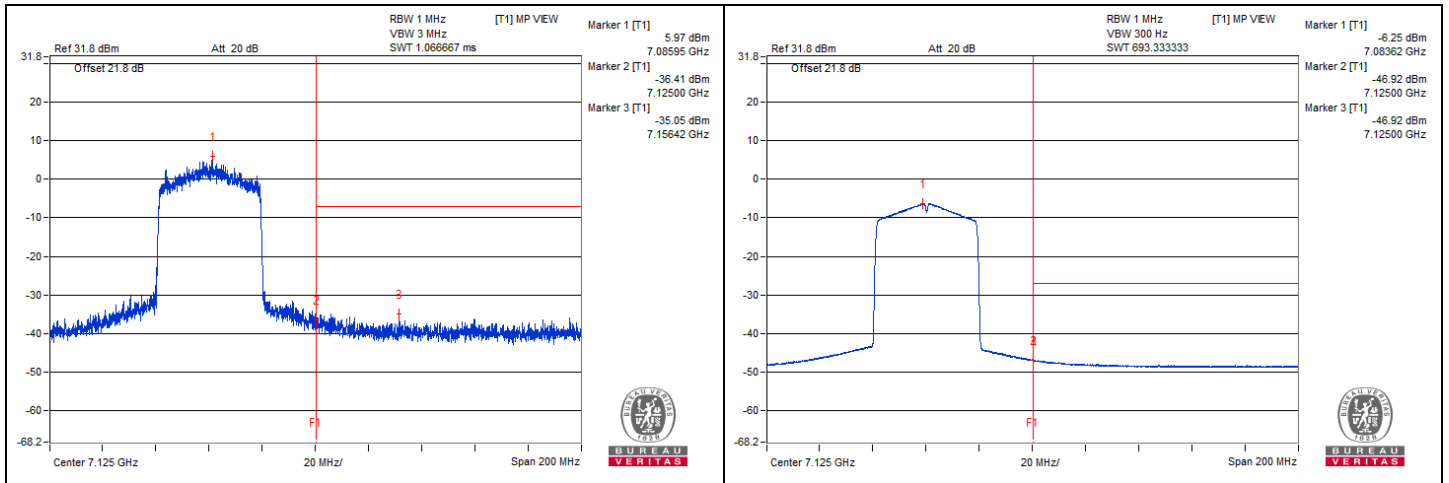


802.11be (EHT80) - Channel 7

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38723.12	52.29 PK	74	-21.71	-47.89	4.92	-42.97
2	38796.25	40.57 AV	54	-13.43	-59.61	4.92	-54.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

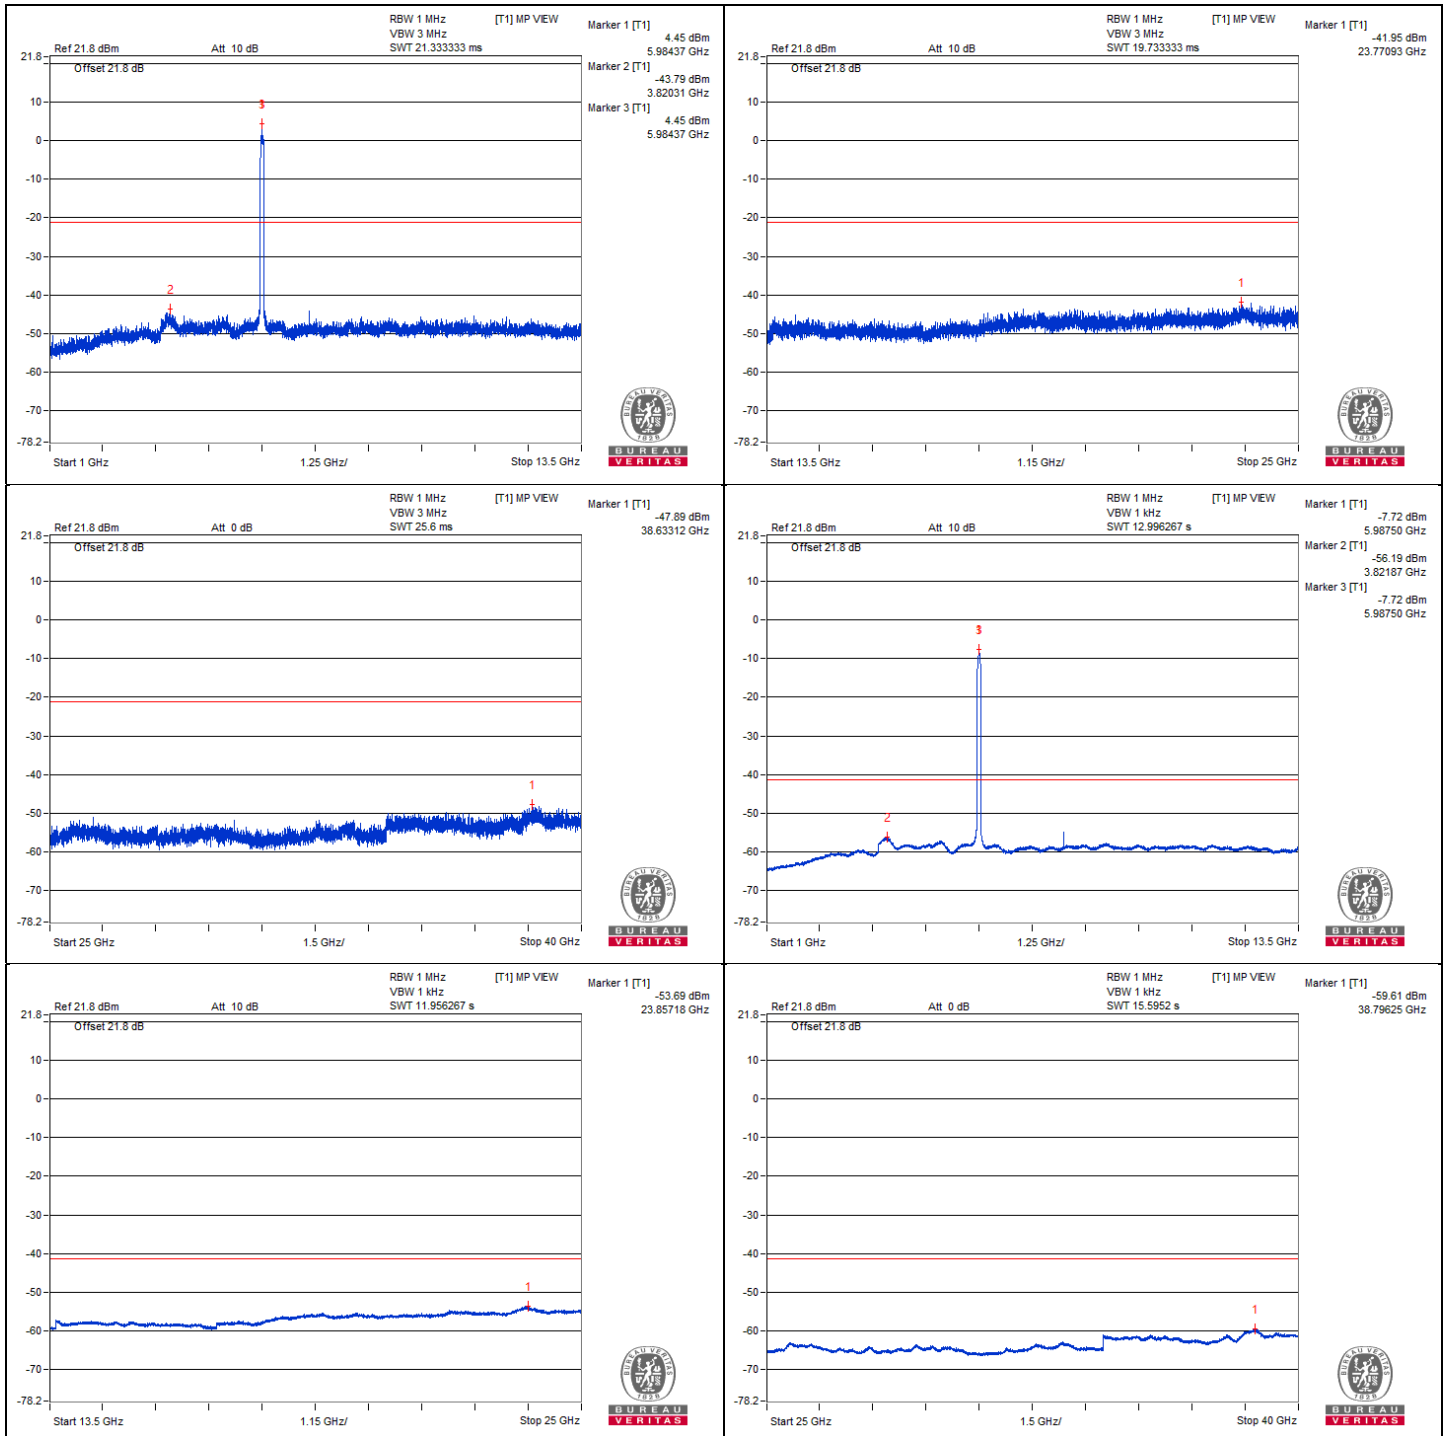


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5850.02	64.72 PK	88.2	-23.48	-35.3	4.76	-30.54
2	#5922.07	53.74 AV	68.2	-14.46	-46.28	4.76	-41.52

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

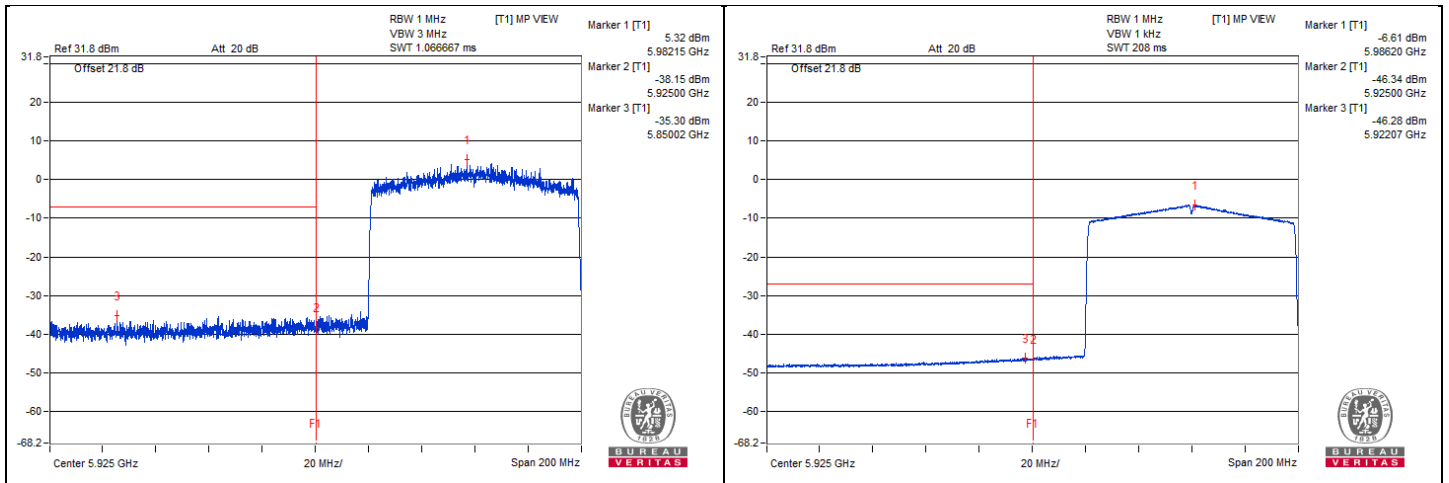


**802.11be (EHT80) - Channel 39**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38776.25	52.15 PK	74	-21.85	-48.03	4.92	-43.11
2	38848.75	40.56 AV	54	-13.44	-59.62	4.92	-54.70

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

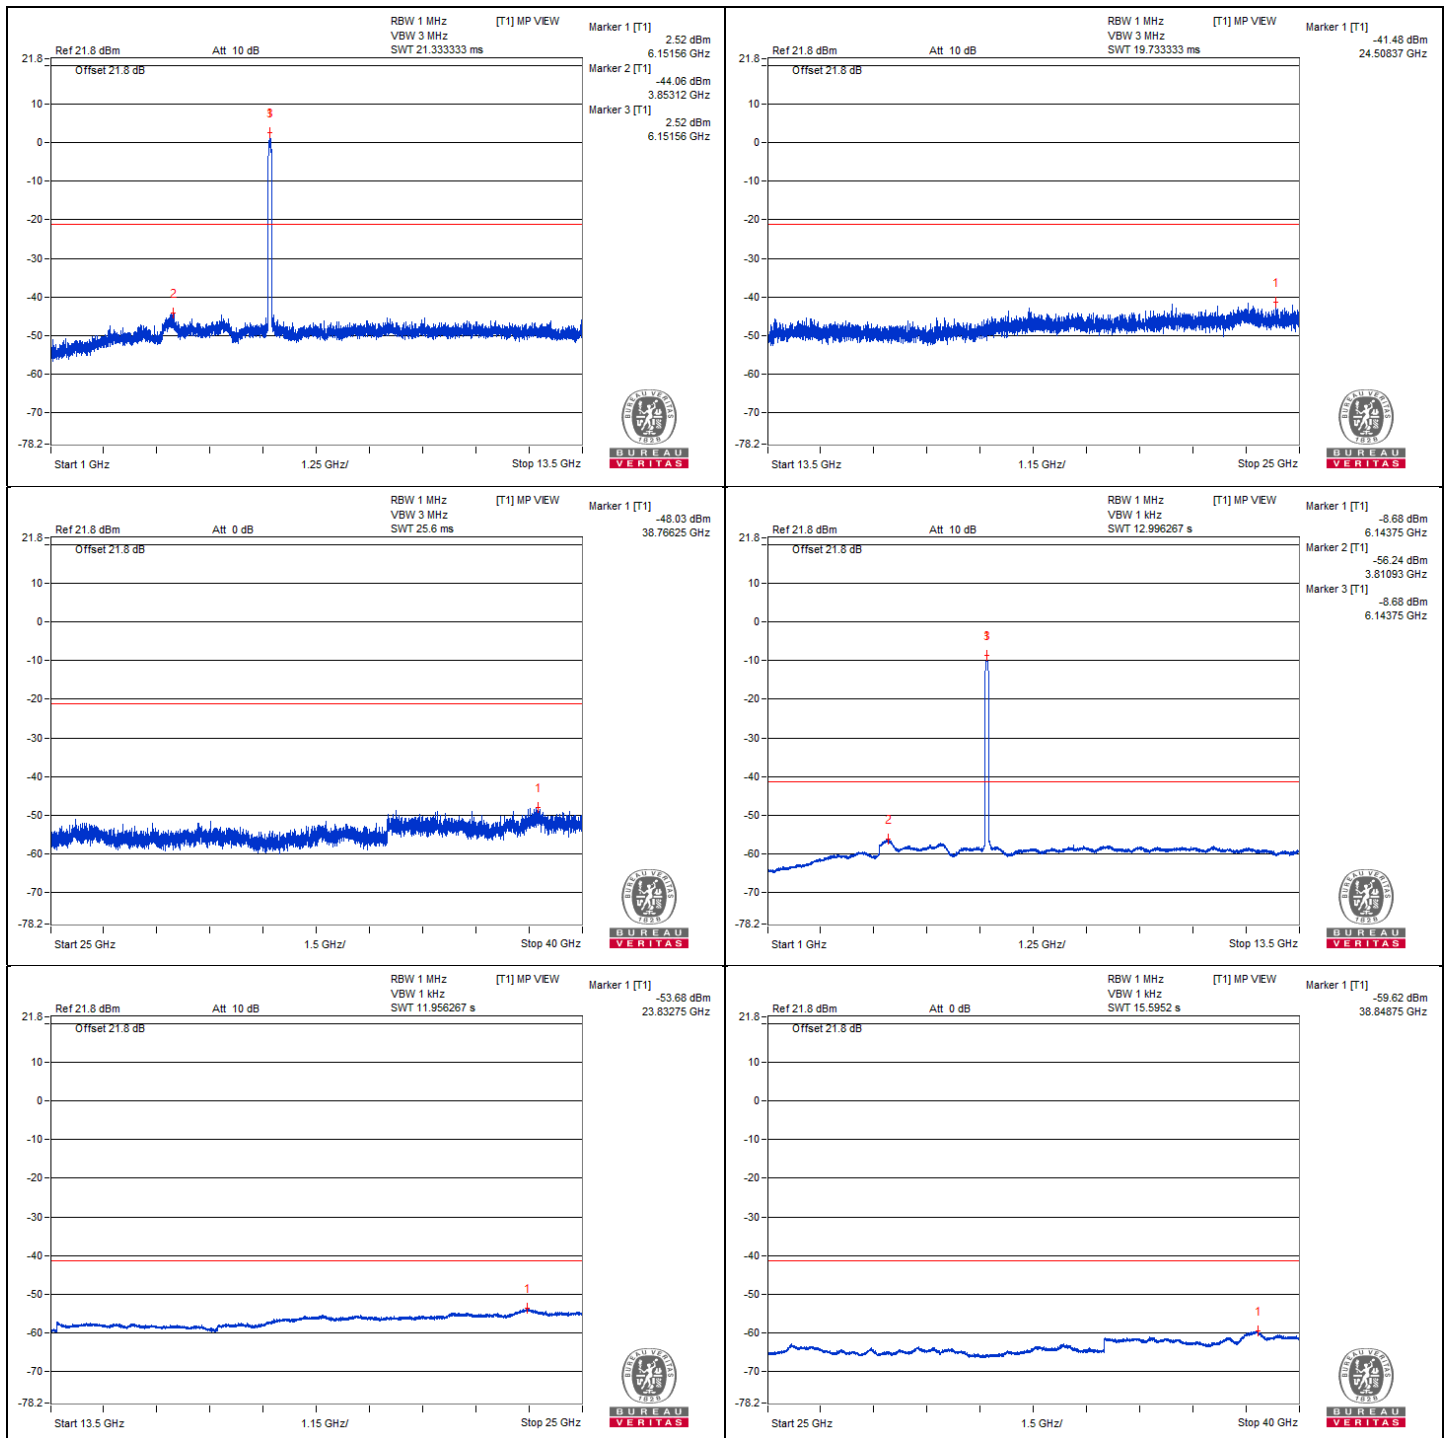


**802.11be (EHT80) - Channel 87**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38748	51.86 PK	74	-22.14	-48.32	4.92	-43.40
2	38766.25	40.58 AV	54	-13.42	-59.6	4.92	-54.68

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

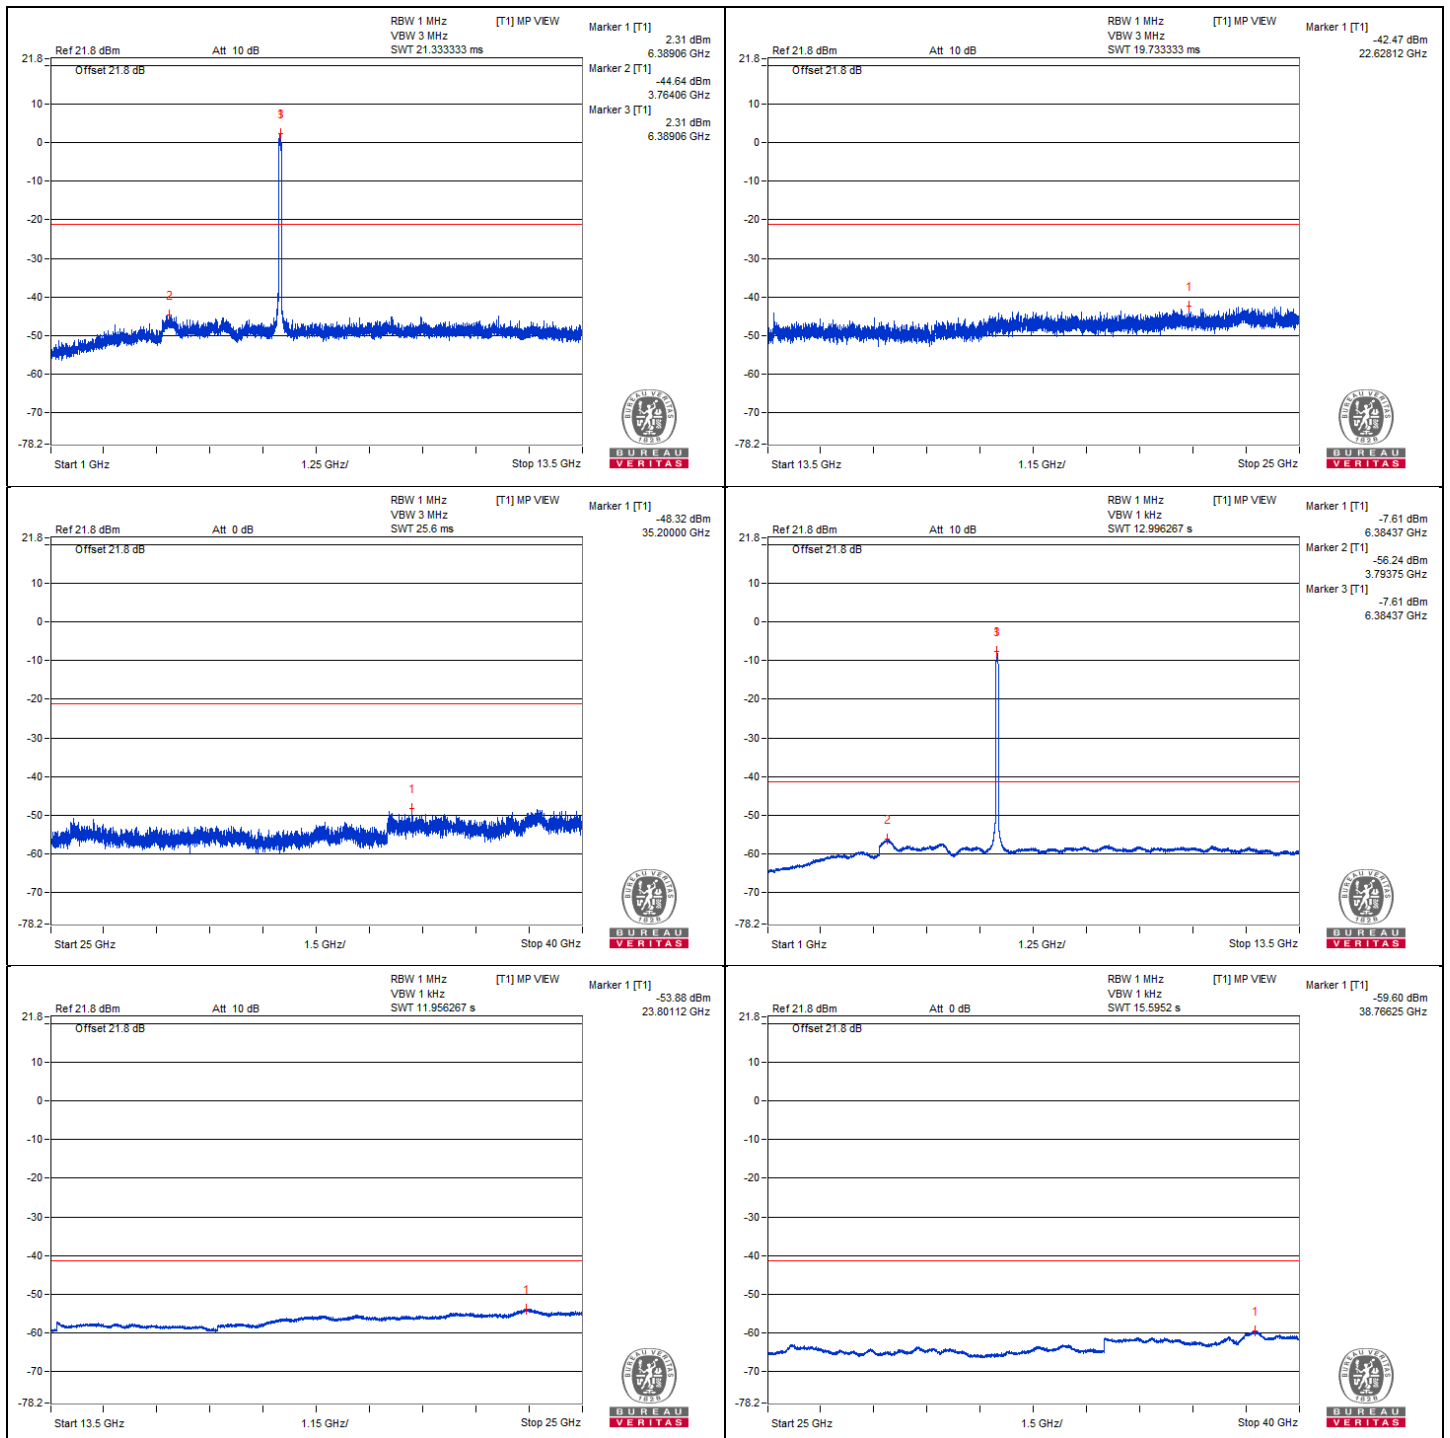


**802.11be (EHT80) - Channel 103**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38801.87	52.99 PK	74	-21.01	-47.19	4.92	-42.27
2	38815	40.53 AV	54	-13.47	-59.65	4.92	-54.73

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

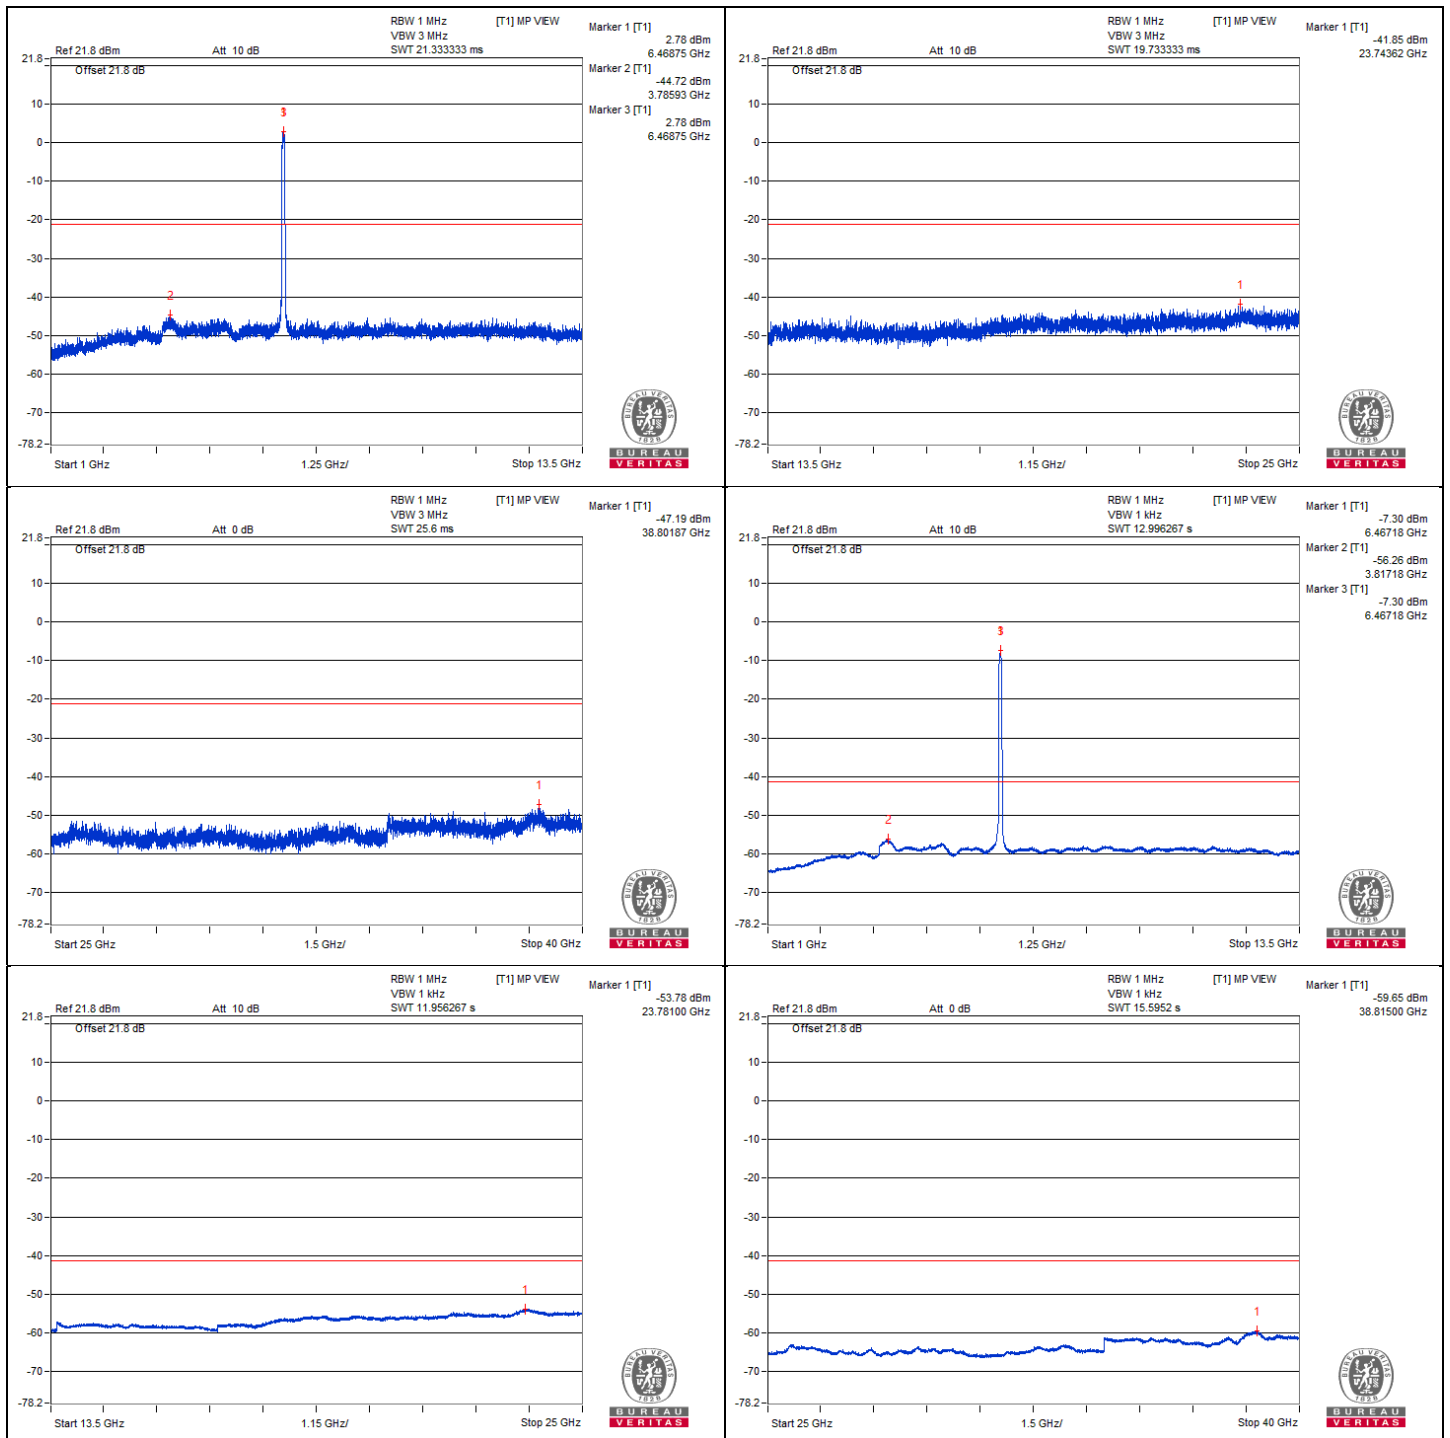


**802.11be (EHT80) - Channel 119**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38843.12	52.96 PK	74	-21.04	-47.22	4.92	-42.30
2	38811.25	40.51 AV	54	-13.49	-59.67	4.92	-54.75

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

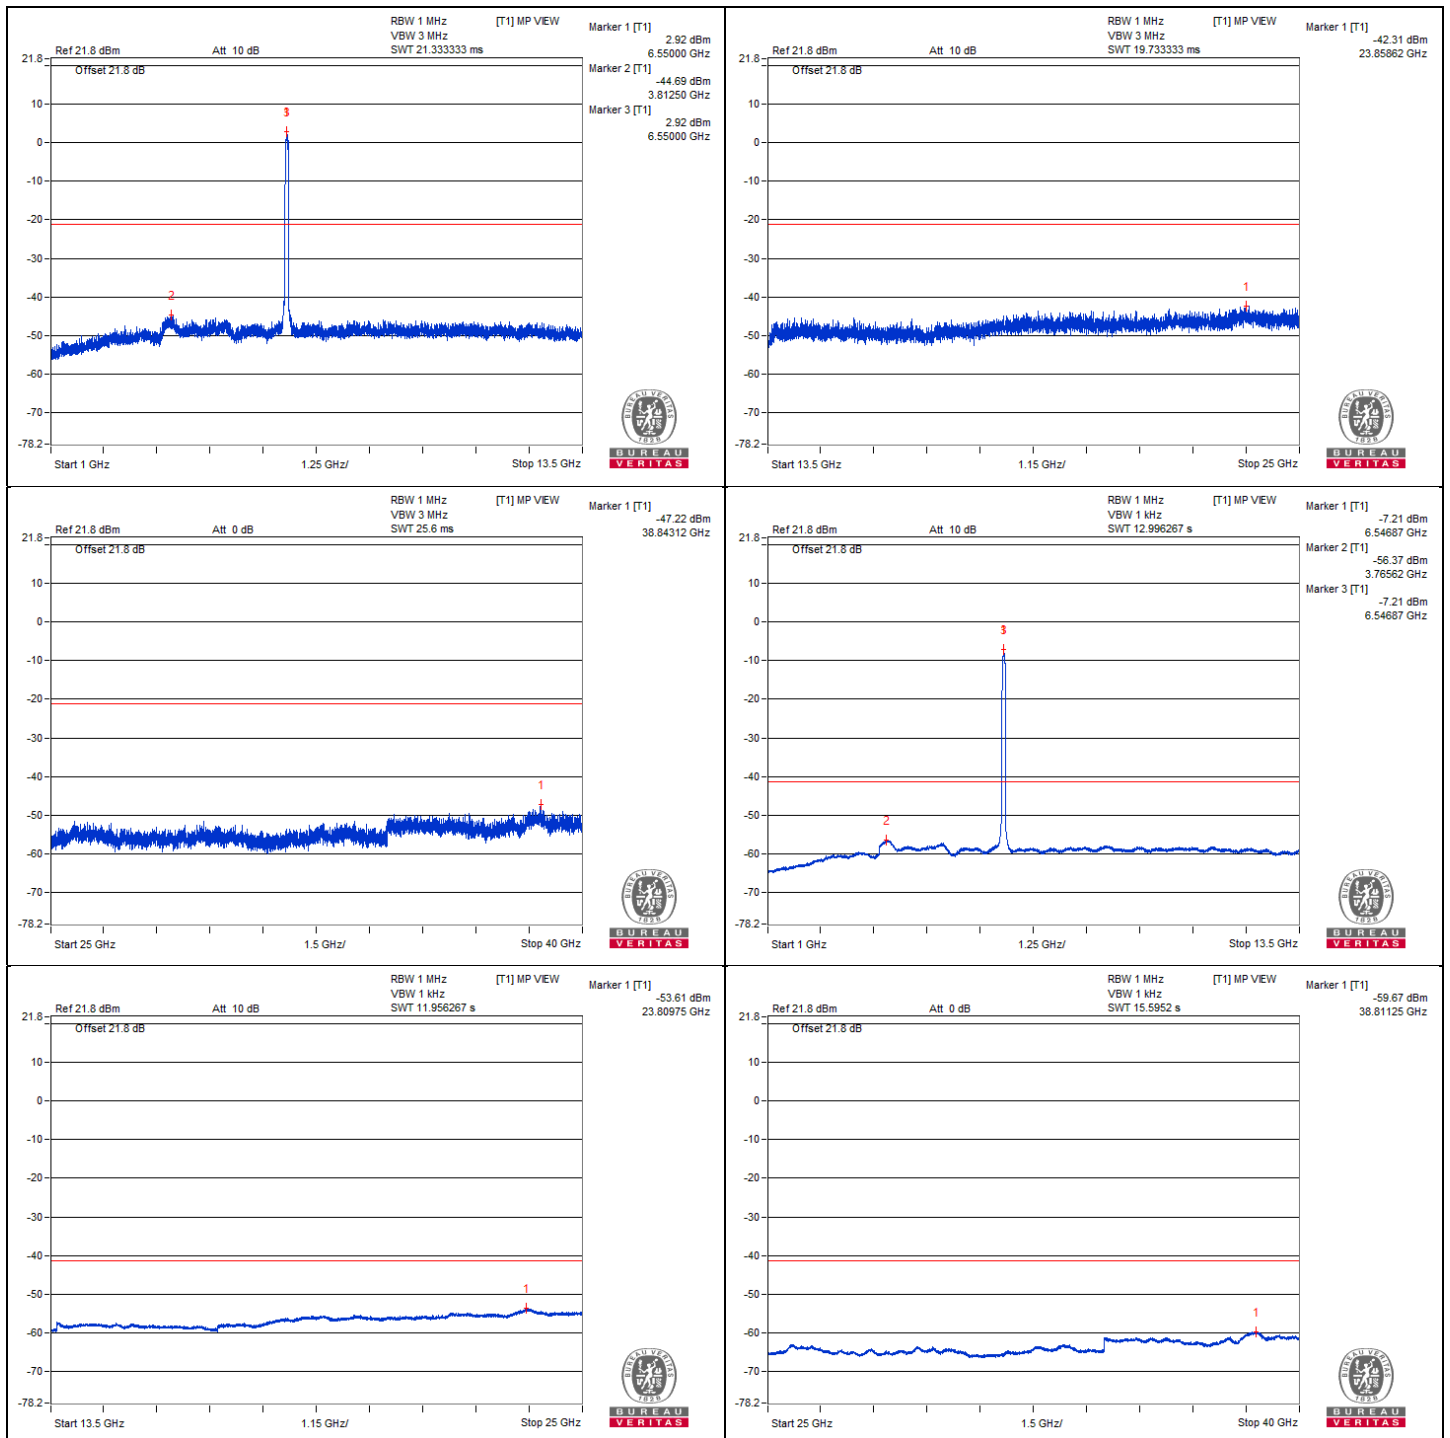


**802.11be (EHT80) - Channel 151**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38854.37	51.93 PK	74	-22.07	-48.25	4.92	-43.33
2	38781.25	40.56 AV	54	-13.44	-59.62	4.92	-54.70

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

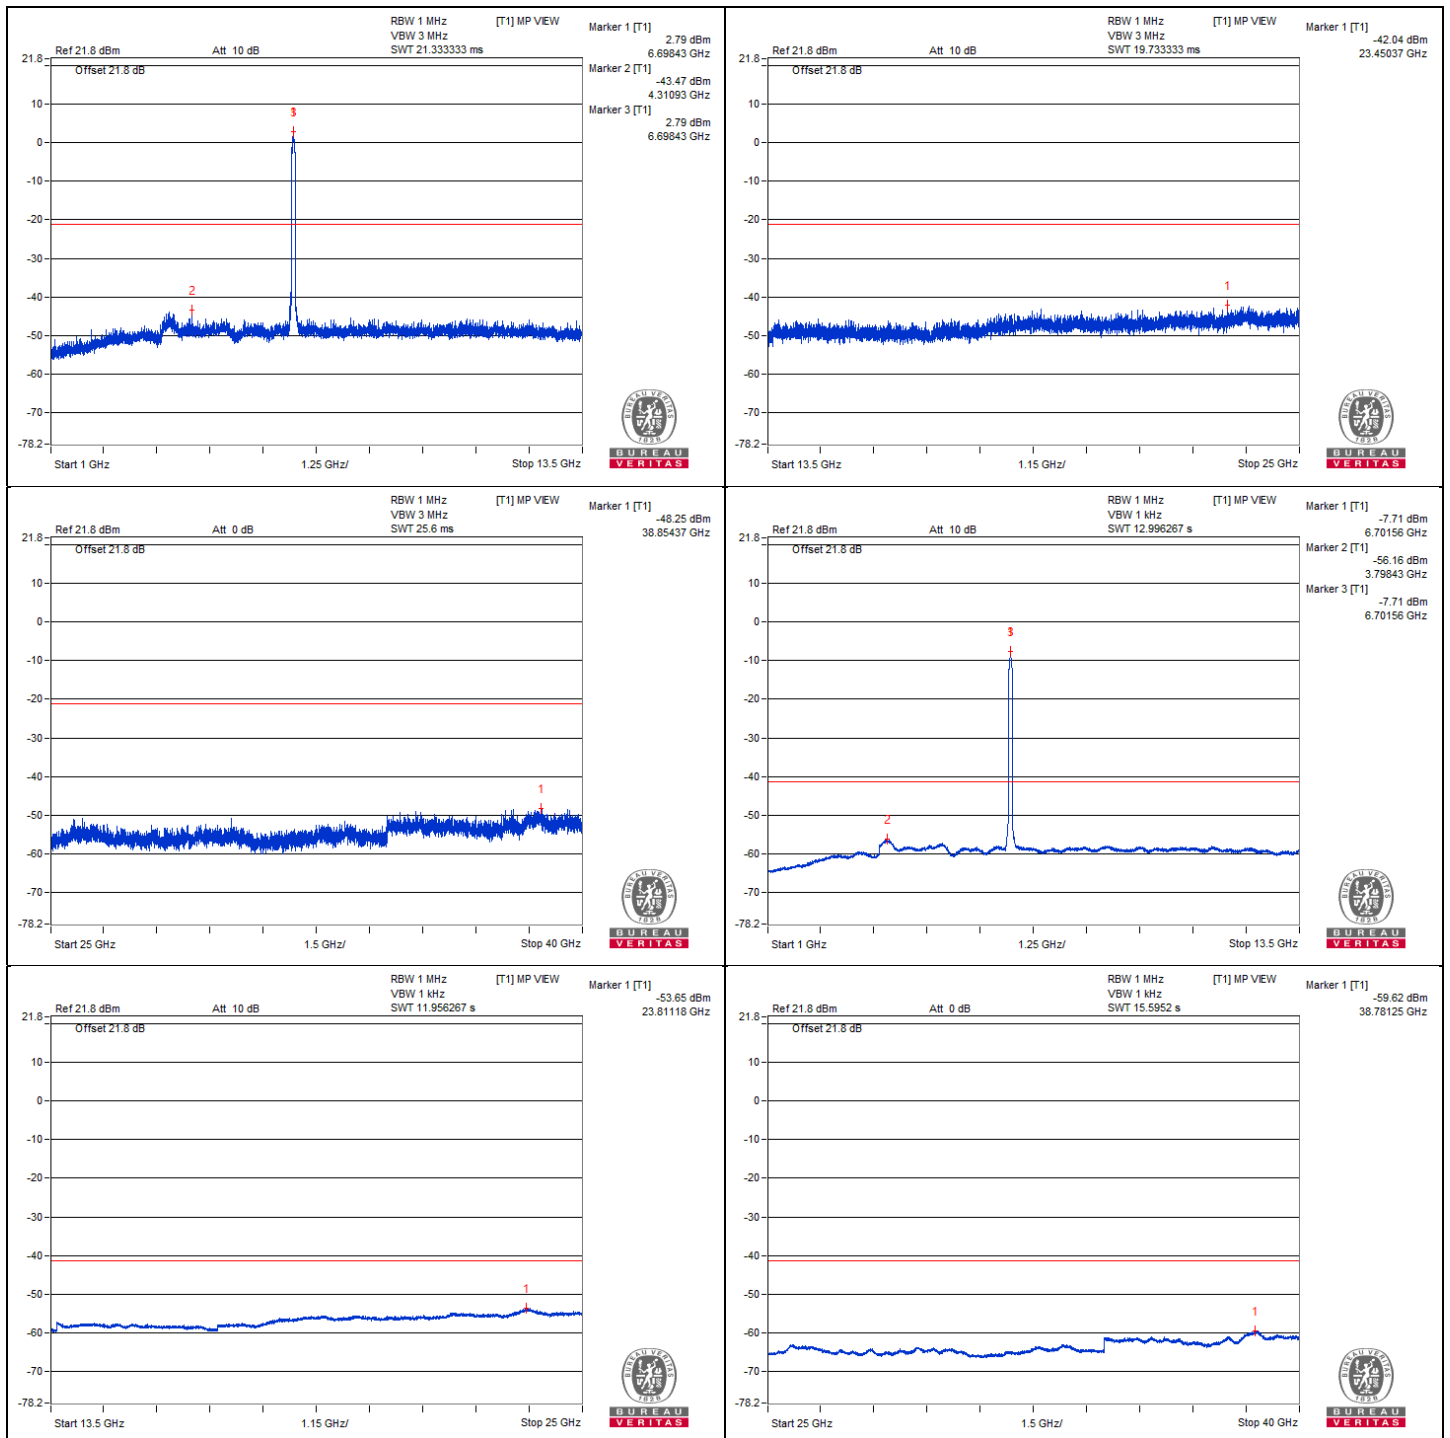




**802.11be (EHT80) - Channel 183**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38756.25	52.89 PK	74	-21.11	-47.29	4.92	-42.37
2	38818.75	40.52 AV	54	-13.48	-59.66	4.92	-54.74

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

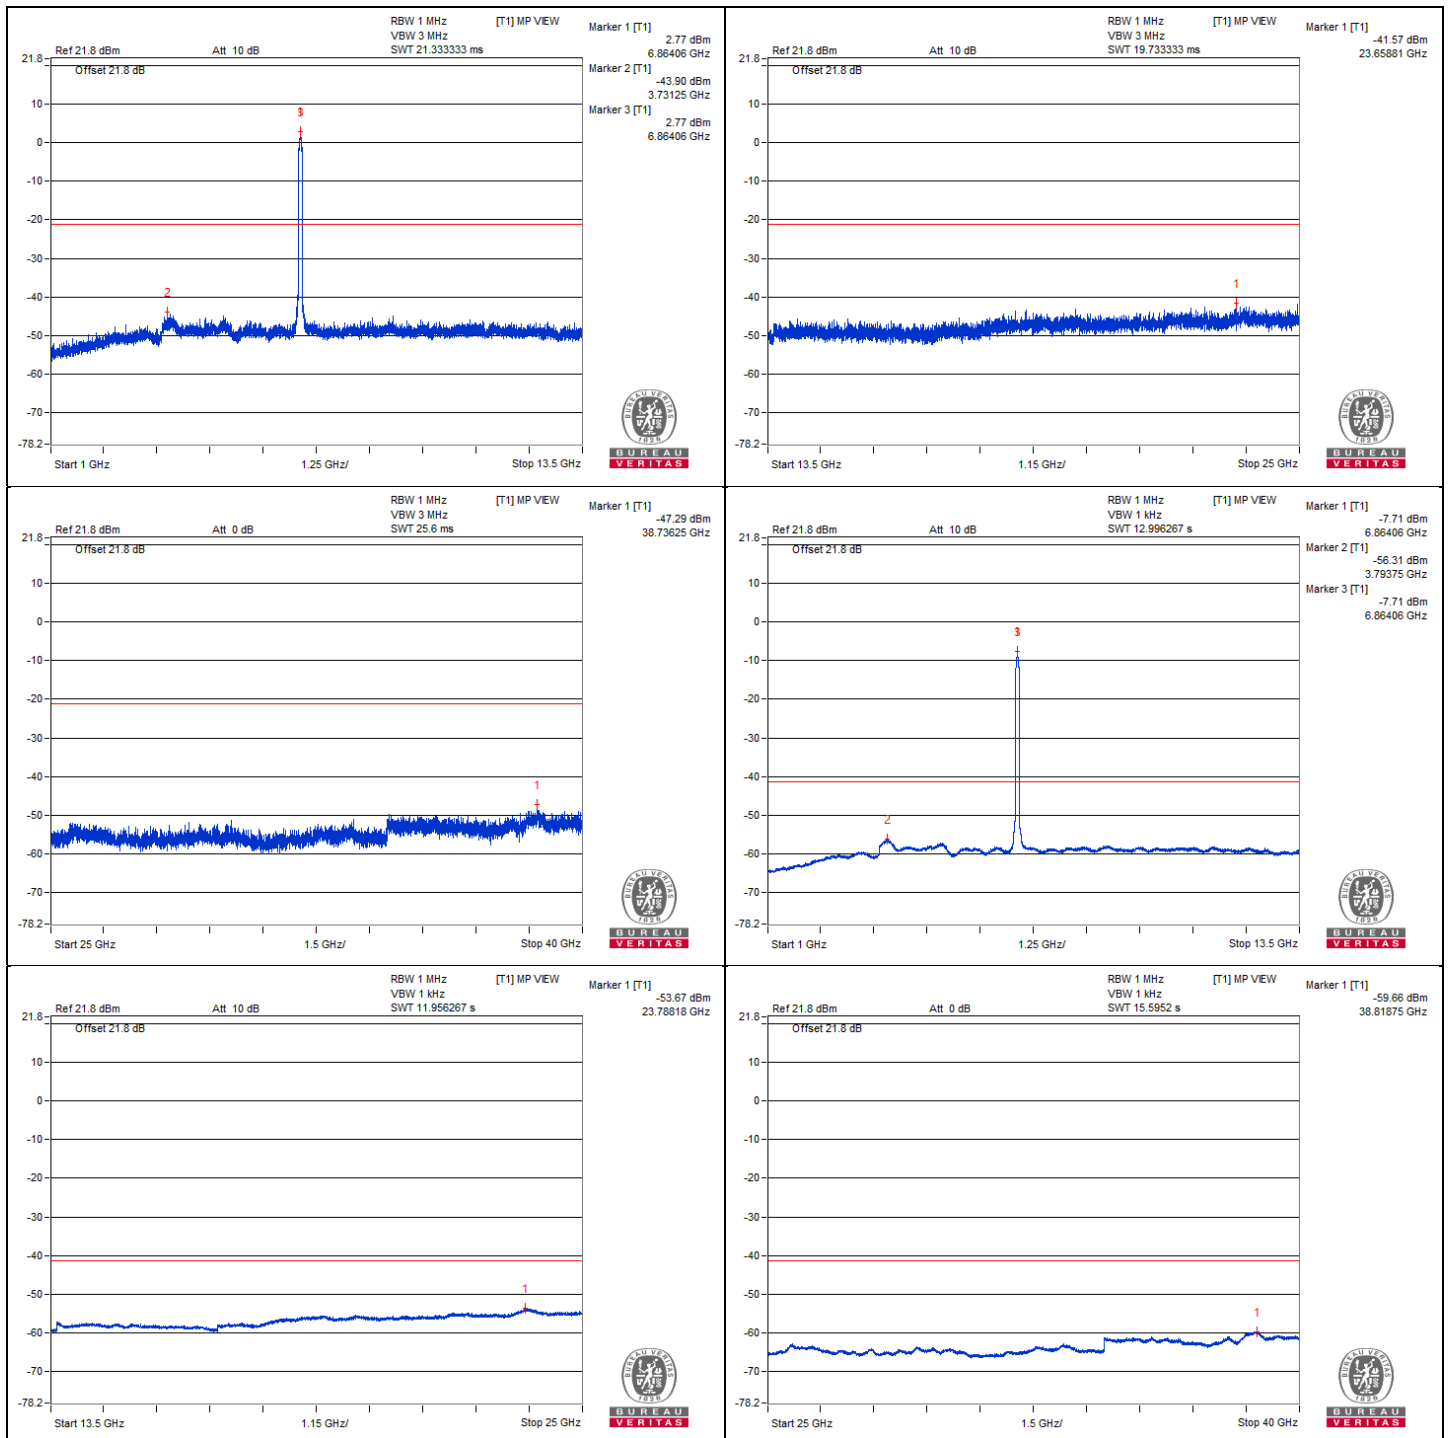


**802.11be (EHT80) - Channel 199**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38745.62	52.07 PK	74	-21.93	-48.11	4.92	-43.19
2	38766.25	40.61 AV	54	-13.39	-59.57	4.92	-54.65

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

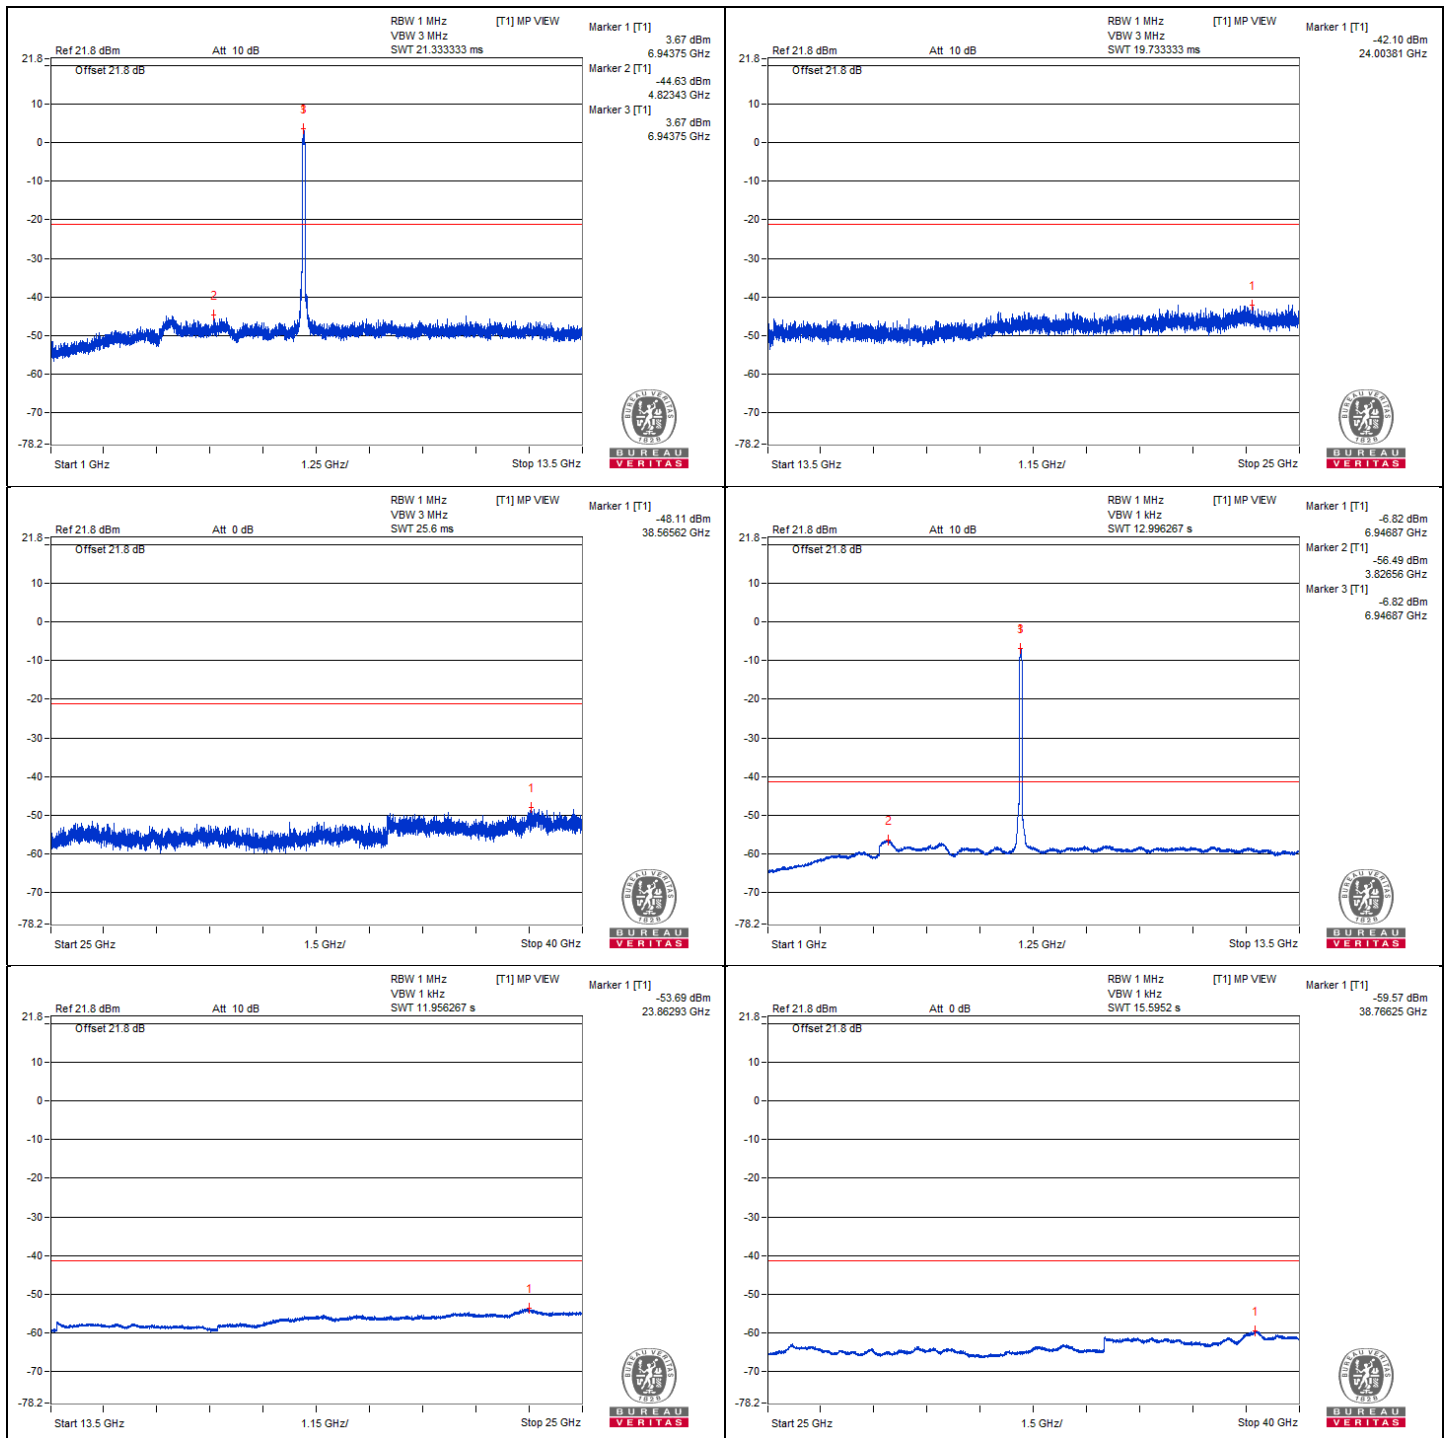


**802.11be (EHT80) - Channel 215**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38800	53.59 PK	74	-20.41	-46.59	4.92	-41.67
2	38809.37	40.65 AV	54	-13.35	-59.53	4.92	-54.61

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

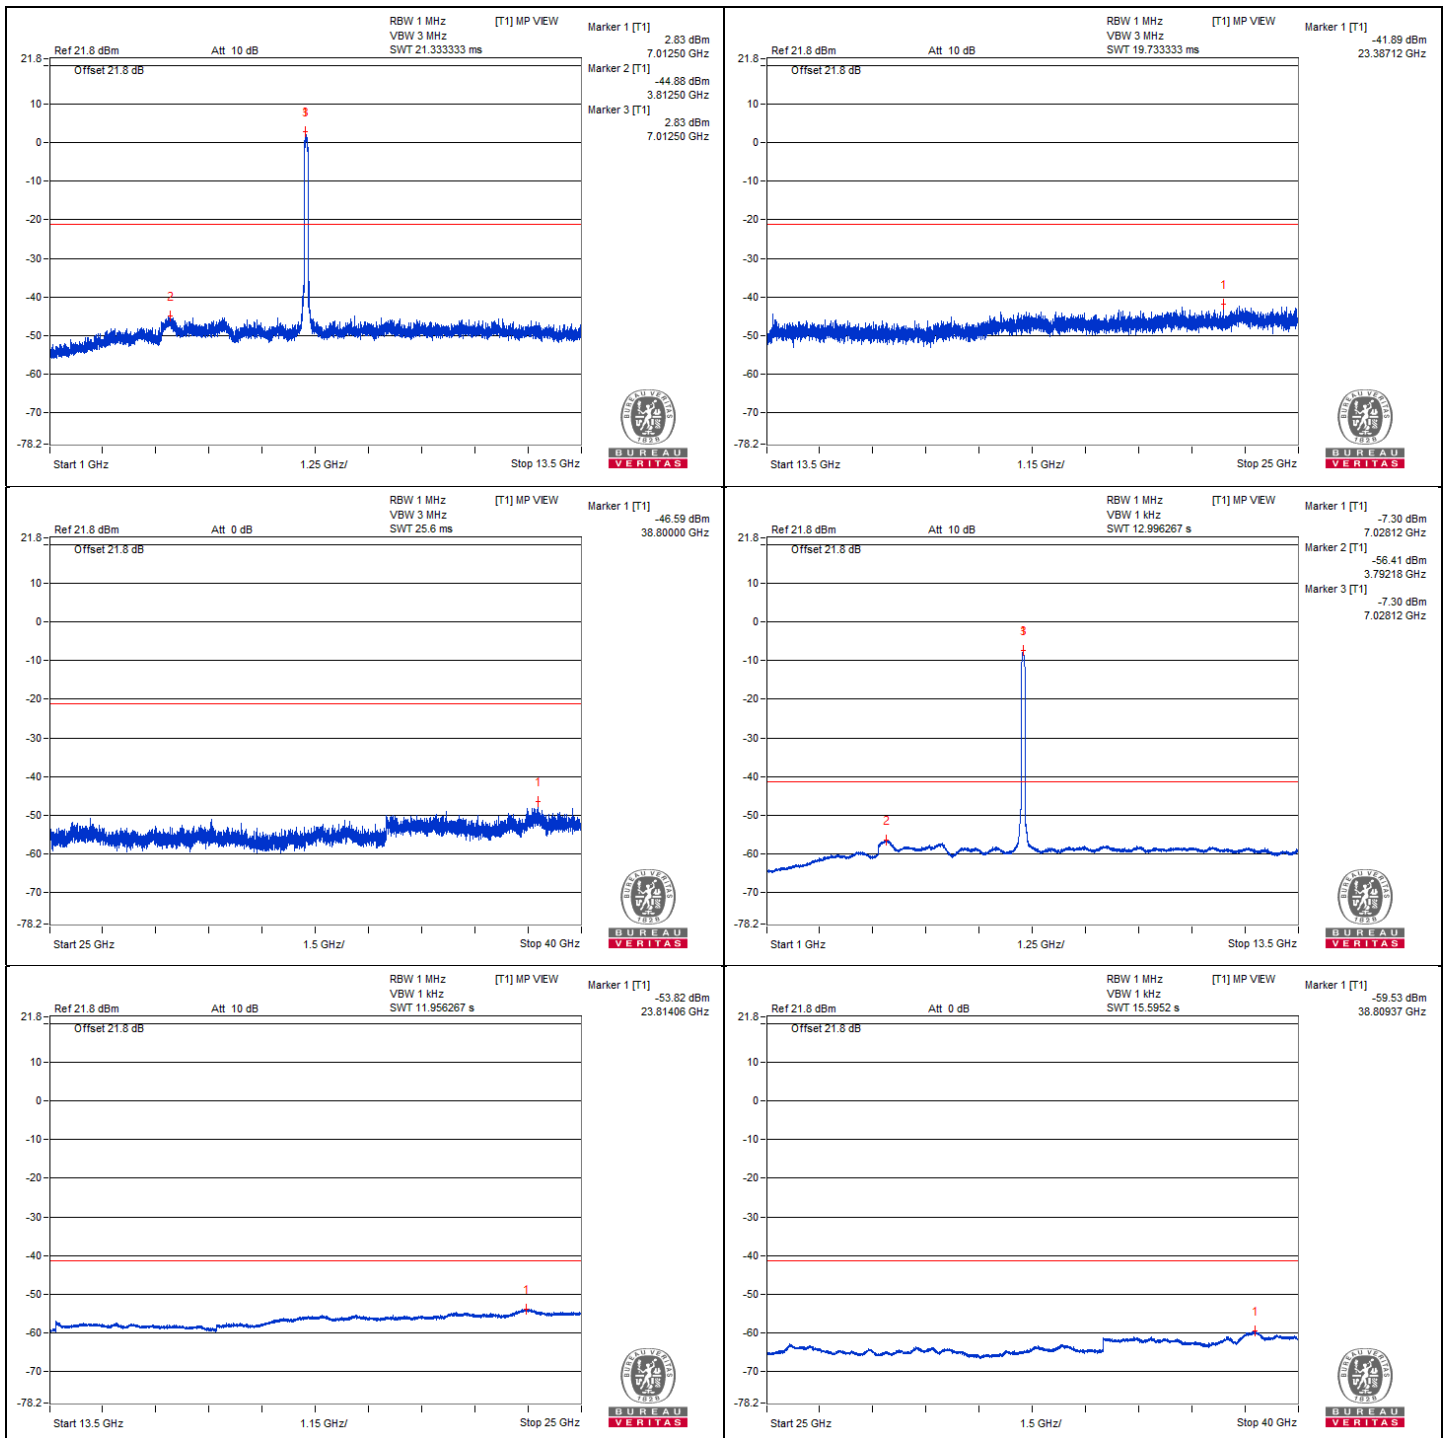


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7195.45	63.46 PK	88.2	-24.74	-35.89	4.09	-31.80
2	#7125.1	52.03 AV	68.2	-16.17	-47.32	4.09	-43.23

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

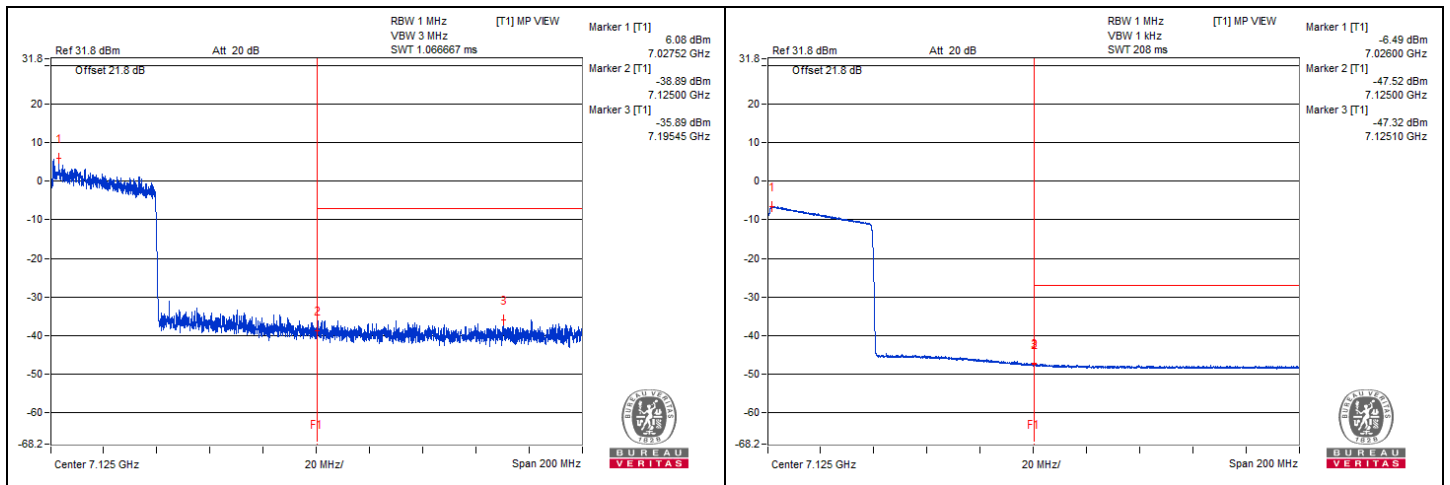


**802.11be (EHT160) - Channel 15**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38935	52.16 PK	74	-21.84	-48.02	4.92	-43.10
2	38815	40.6 AV	54	-13.4	-59.58	4.92	-54.66

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

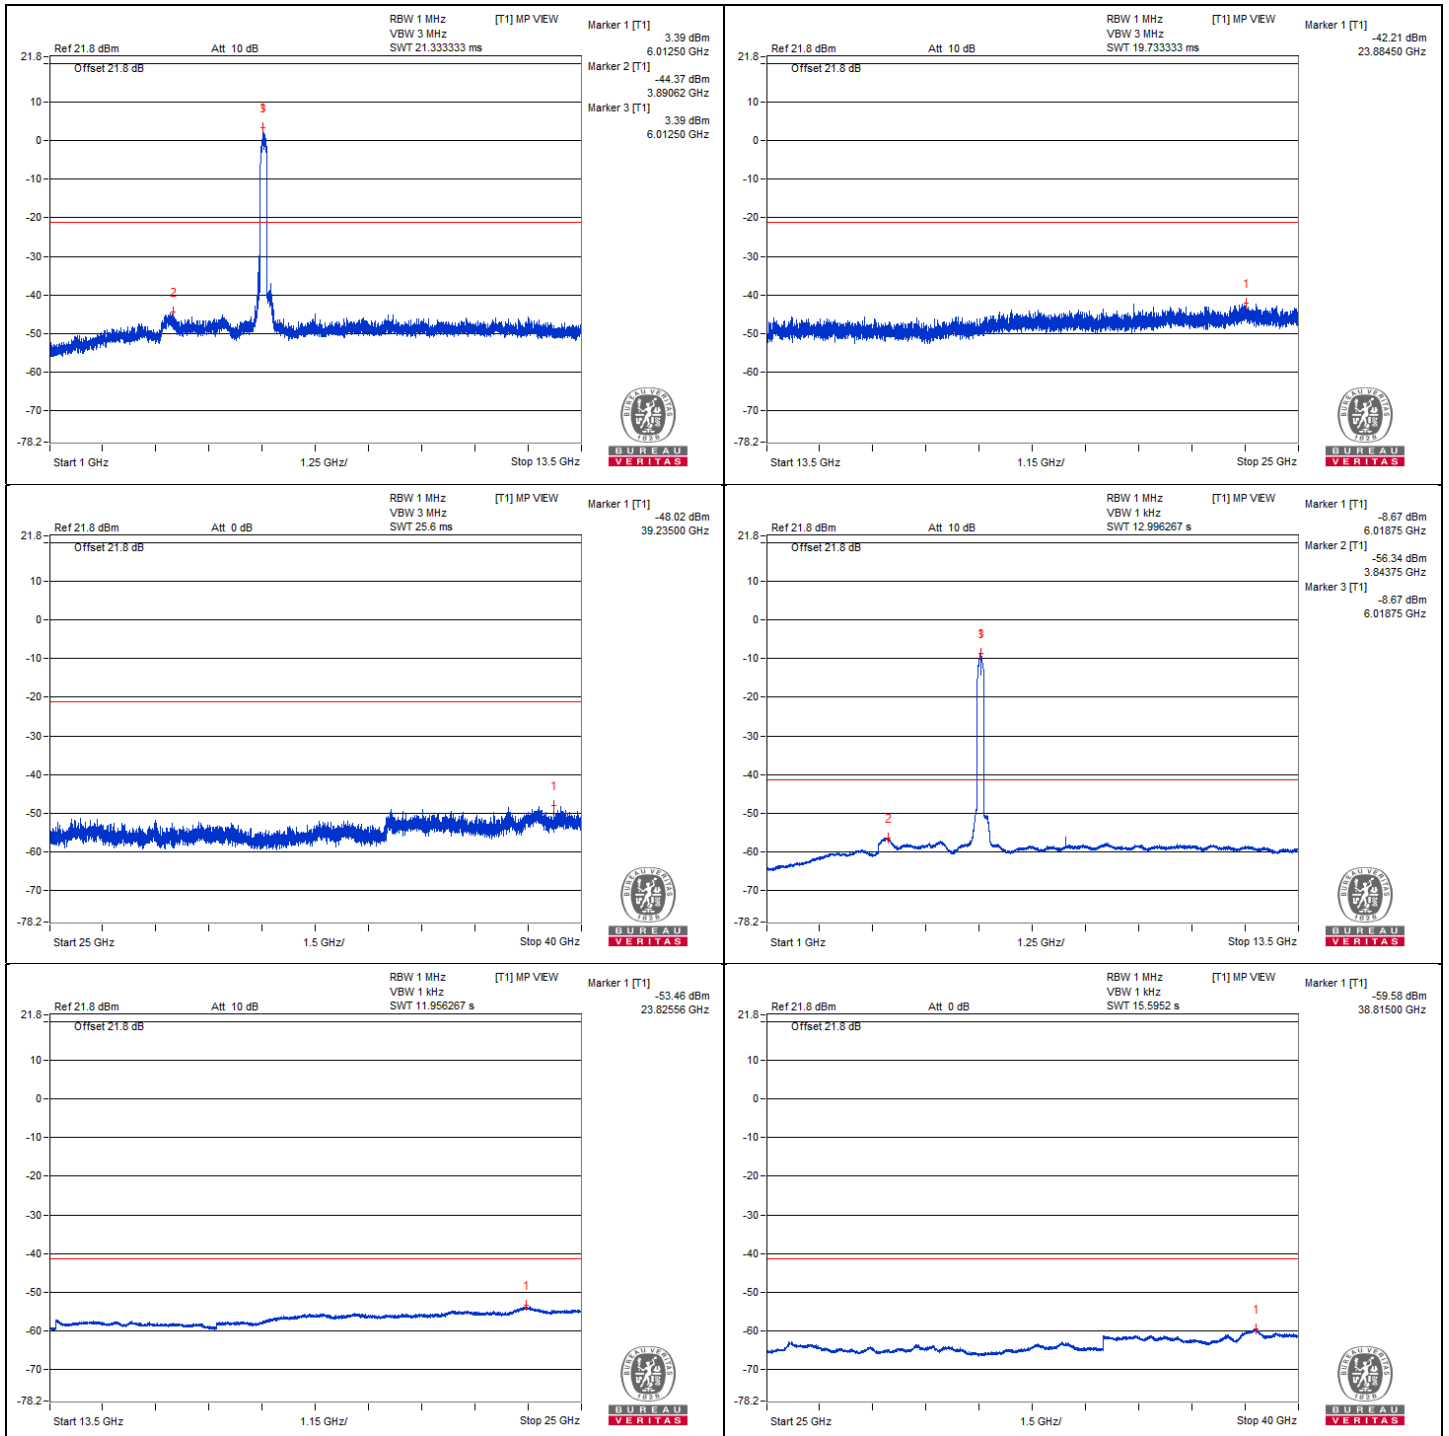


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5895.65	74.58 PK	88.2	-13.62	-25.44	4.76	-20.68
2	#5923.72	55.32 AV	68.2	-12.88	-44.7	4.76	-39.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

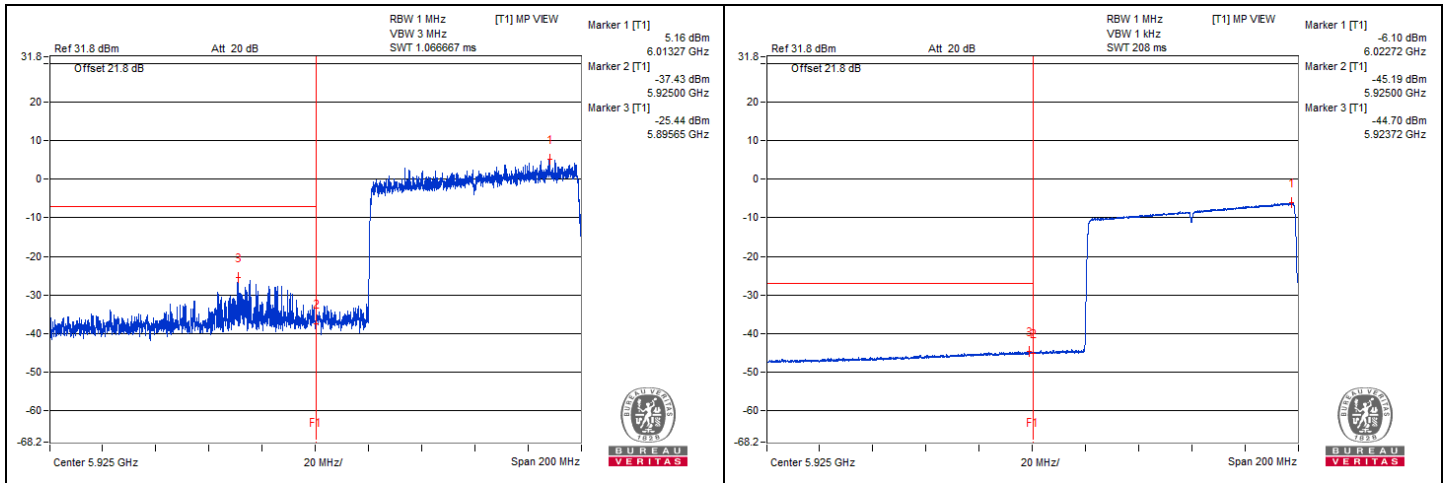


**802.11be (EHT160) - Channel 47**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38882.5	52.82 PK	74	-21.18	-47.36	4.92	-42.44
2	38837.5	40.7 AV	54	-13.3	-59.48	4.92	-54.56

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

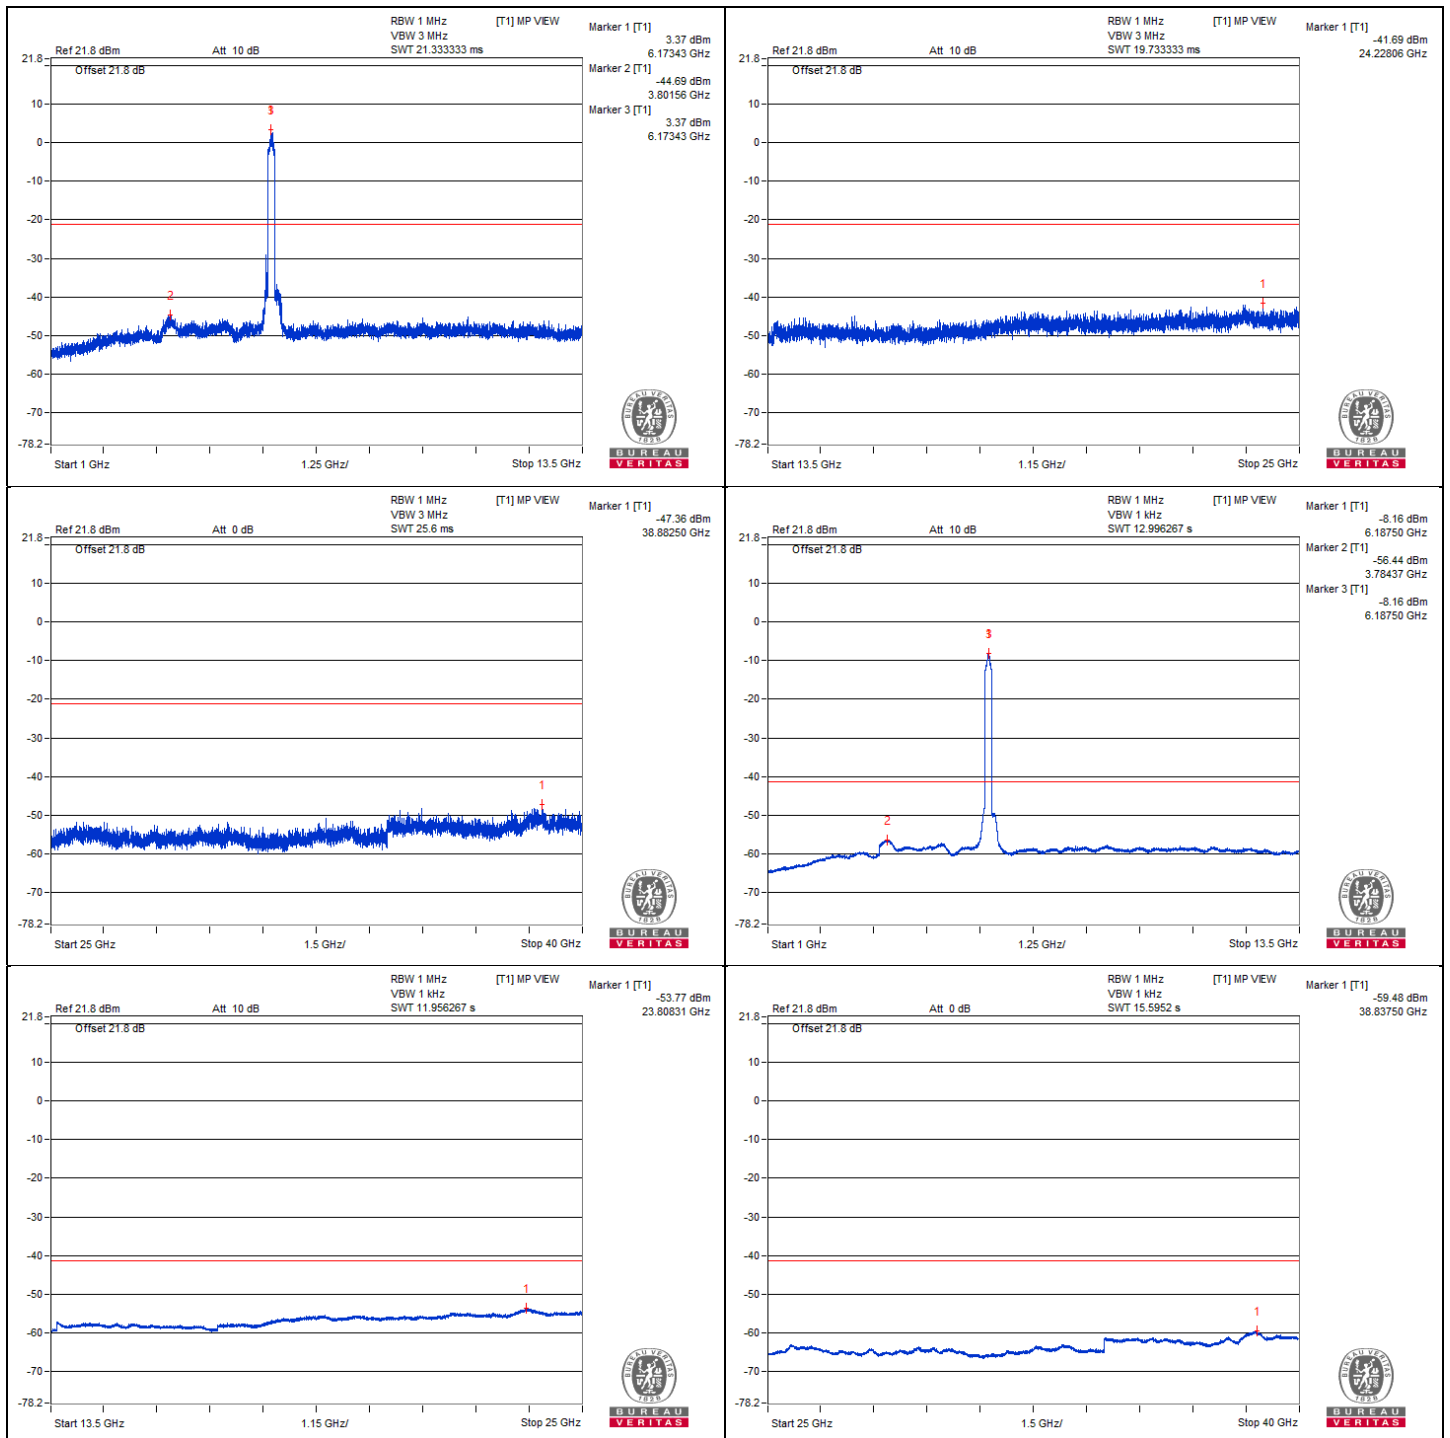

**802.11be (EHT160) - Channel 79**  
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38916.25	53.48 PK	74	-20.52	-46.7	4.92	-41.78
2	38841.25	40.47 AV	54	-13.53	-59.71	4.92	-54.79

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

