




FCC DFS TEST REPORT

FCC ID : RAX-AIOS5V
Equipment : HEOS 5.X Platform Module
Brand Name : Arcadyan
Model Name : WN9722BAC22-DM (AIOS5.0V)
Applicant : Arcadyan Technology Corporation
No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan
Manufacturer : Arcadyan Technology Corporation
No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Jan. 13, 2020, and testing was started from Jan. 14, 2020 and completed on Jan. 14, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

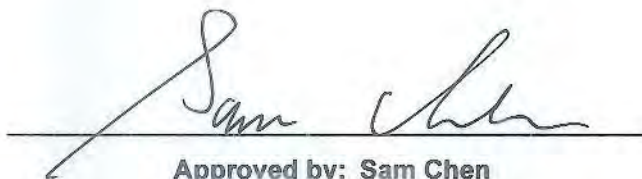
Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Accessories9

1.3 Support Equipment.....9

1.4 Applicable Standards9

1.5 Testing Location Information.....9

2 Test Configuration of EUT.....10

2.1 Test Channel Frequencies Configuration.....10

2.2 The Worst Case Measurement Configuration.....10

3 Dynamic Frequency Selection (DFS) Test Result11

3.1 General DFS Information11

3.2 Radar Test Waveform Calibration14

3.3 In-service Monitoring21

4 Test Equipment and Calibration Data29

5 Measurement Uncertainty30

Appendix A. Test Photos

Appendix B. Photographs of EUT



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|------------------------|--|--------------------|--------|
| - | FCC KDB 905462 7.8.1 | DFS: UNII Detection Bandwidth Measurement | N/A | - |
| - | FCC KDB 905462 7.8.2.1 | DFS: Initial Channel Availability Check Time | N/A | - |
| - | FCC KDB 905462 7.8.2.2 | DFS: Radar Burst at the Beginning of the Channel Availability Check Time | N/A | - |
| - | FCC KDB 905462 7.8.2.3 | DFS: Radar Burst at the End of the Channel Availability Check Time | N/A | - |
| 3.3 | FCC KDB 905462 7.8.3 | DFS: In-Service Monitoring for Channel Move Time (CMT) | PASS | - |
| 3.3 | FCC KDB 905462 7.8.3 | DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT) | PASS | - |
| 3.3 | FCC KDB 905462 7.8.3 | DFS: In-Service Monitoring for Non-Occupancy Period (NOP) | PASS | - |
| - | FCC KDB 905462 7.8.4 | DFS: Statistical Performance Check | N/A | - |
| - | FCC KDB 905462 8.1 | User Access Restrictions | N/A | - |

Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period are required to perform.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

None

Reviewed by: **Sam Chen**
Report Producer: **Sandy Chuang**



1 General Description

1.1 Information

1.1.1 RF General Information

| Specification Items | Description | |
|-----------------------------|--|---|
| Frequency Range | 5250 MHz – 5350 MHz 5470 MHz – 5725 MHz | |
| Power Type | From host system | |
| Channel Bandwidth | 20/40/80 MHz operating channel bandwidth | |
| Operating Mode | <input type="checkbox"/> Master | |
| | <input type="checkbox"/> Client with radar detection | |
| | <input checked="" type="checkbox"/> Client without radar detection | |
| Communication Mode | <input checked="" type="checkbox"/> IP Based (Load Based) | <input type="checkbox"/> Frame Based |
| TPC Function | <input type="checkbox"/> With TPC | <input checked="" type="checkbox"/> Without TPC |
| Weather Band (5600~5650MHz) | <input checked="" type="checkbox"/> With 5600~5650MHz | <input type="checkbox"/> Without 5600~5650MHz |
| Power-on cycle | NA (No Channel Availability Check Function) | |
| Software / Firmware Version | 7.35.180.187 <691902 CY> FWID 01763b4d62 | |
| | <ul style="list-style-type: none"> ◆ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. ◆ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, modulation. ◆ TPC is not required since the maximum EIRP is less than 500mW (27dBm). | |

Note: The above information was declared by manufacturer.

**1.1.2 Antenna Information**

| Set | Port | Brand | P/N | Antenna Type | Connector | Gain (dBi) |
|-----|------|---------|--|----------------|-----------|------------|
| 1 | 1, 2 | Airgain | N2420DG3-T2L-PK1-G30U | PIFA Antenna | I-PEX | Note 1 |
| 2 | 1, 2 | Airgain | N2420DG3-T2L-PK1-G100U | PIFA Antenna | I-PEX | |
| 3 | 1, 2 | Airgain | N2420DG3-T2L-PK1-G600U | PIFA Antenna | I-PEX | |
| 4 | 1, 2 | Airgain | N2425D-T2L-PK1-G30U | PIFA Antenna | I-PEX | |
| 5 | 1, 2 | Airgain | N2425D-T2R-PK1-G150U | PIFA Antenna | I-PEX | |
| 6 | 1, 2 | Airgain | N2425D-T2R-PK1-G30U | PIFA Antenna | I-PEX | |
| 7 | 1, 2 | Airgain | N2425D-T2R-PK1-G500U | PIFA Antenna | I-PEX | |
| 8 | 1, 2 | LITE | 503021-0123-0BC | Dipole Antenna | I-PEX | |
| 9 | 1, 2 | LITE | 501301-0019-1BC (300mm antenna cable: 510411-5210-24C) | Dipole Antenna | I-PEX | |
| 10 | 1, 2 | LITE | 501301-0019-1BC (500mm antenna cable: 510411-5300-23C) | Dipole Antenna | I-PEX | |
| 11 | 1, 2 | LITE | 503021-0003-0BC (200mm antenna cable) | Dipole Antenna | I-PEX | |
| 12 | 1, 2 | LITE | 503021-0013-0BC (500mm antenna cable) | Dipole Antenna | I-PEX | |
| 13 | 1, 2 | LITE | 501301-0019-1BC (200mm antenna cable: 510411-5310-23C) | Dipole Antenna | I-PEX | |
| 14 | 1, 2 | LITE | 503021-0113-0BC (300mm antenna cable) | Dipole Antenna | I-PEX | |



Note 1:

| Set | Port | Antenna Gain (dBi) | | Cable Loss (dB) | | True Gain (dBi) | |
|-----|------|---------------------|--------------|---------------------|--------------|---------------------|--------------|
| | | WLAN 2.4GHz / BT | WLAN 5GHz | WLAN 2.4GHz / BT | WLAN 5GHz | WLAN 2.4GHz / BT | WLAN 5GHz |
| 1 | 1, 2 | 3.1 | 3.66 | 0.105 | 0.147 | 2.995 | 3.513 |
| 2 | 1, 2 | 3.1 | 3.66 | 0.35 | 0.49 | 2.75 | 3.17 |
| 3 | 1, 2 | 3.1 | 3.66 | 2.1 | 2.94 | 1 | 0.72 |
| 4 | 1, 2 | 1.9 | 3.5 | 0.105 | 0.147 | 1.795 | 3.353 |
| 5 | 1, 2 | 1.9 | 3.5 | 0.525 | 0.735 | 1.375 | 2.765 |
| 6 | 1, 2 | 1.9 | 3.5 | 0.105 | 0.147 | 1.795 | 3.353 |
| 7 | 1, 2 | 1.9 | 3.5 | 1.75 | 2.45 | 0.15 | 1.05 |
| 8 | 1, 2 | - | - | - | - | 2.55 | 2.35 |
| 9 | 1, 2 | 3.48 | 4.29 | 0.72 | 1.66 | 2.76 | 2.63 |
| 10 | 1, 2 | 3.48 | 4.29 | 1.49 | 1.7 | 1.99 | 2.59 |
| 11 | 1, 2 | - | - | - | - | 2.52 | 3.04 |
| 12 | 1, 2 | - | - | - | - | 1.74 | 1.68 |
| 13 | 1, 2 | - | - | - | - | 2.64 | 2.86 |
| 14 | 1, 2 | - | - | - | - | 2.35 | 2.44 |

Note 2: The above information was declared by manufacturer.

Note 3: The EUT has thirteen sets of antenna, and each set contains two antennas.

Note 4: For DFS test, only the lowest gain antennas “set 3” was tested and recorded in the report.

<For WLAN 2.4GHz Band>

For IEEE 802.11b/g/n mode <2TX/2RX>:

Port 1 and Port 2 will transmit/receive the same signal simultaneously.

Port 1 and Port 2 can be used as transmitting/receiving antennas.

<For WLAN 5GHz Band>

For IEEE 802.11a/n/ac mode <2TX/2RX>:

Port 1 and Port 2 will transmit/receive the same signal simultaneously.

Port 1 and Port 2 can be used as transmitting/receiving antennas.

<For Bluetooth>

For bluetooth mode <1TX/1RX>:

Only Port 1 can be used as transmitting/receiving antenna.



1.1.3 Table for Class II Change

This product is an extension of original one reported under Sporton project number: FZ010205.

Below is the table for the change of the product with respect to the original one.

| Modifications | Performance Checking |
|---|--|
| Adding four sets of Dipole antenna. (set 11~14) | After evaluating, it is not necessary to verify. |

Note: All test results are based on original test report.

1.1.4 DFS Band Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 118, 126, 134.

For 80MHz bandwidth systems, use Channel 58, 106, 122.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5250~5350 MHz Band 2 | 52 | 5260 MHz | 60 | 5300 MHz |
| | 54 | 5270 MHz | 62 | 5310 MHz |
| | 56 | 5280 MHz | 64 | 5320 MHz |
| | 58 | 5290 MHz | - | - |
| 5470~5725 MHz Band 3 | 100 | 5500 MHz | 120 | 5600 MHz |
| | 102 | 5510 MHz | 122 | 5610 MHz |
| | 104 | 5520 MHz | 124 | 5620 MHz |
| | 106 | 5530 MHz | 126 | 5630 MHz |
| | 108 | 5540 MHz | 128 | 5640 MHz |
| | 110 | 5550 MHz | 132 | 5660 MHz |
| | 112 | 5560 MHz | 134 | 5670 MHz |
| | 116 | 5580 MHz | 136 | 5680 MHz |
| 118 | 5590 MHz | 140 | 5700 MHz | |



1.2 Accessories

N/A

1.3 Support Equipment

| Support Equipment | | | | |
|-------------------|-----------|------------|---------------------|-------------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | Notebook | DELL | E4300 | N/A |
| B | Notebook | DELL | E4300 | N/A |
| C | WLAN AP | D-LINK | DIR860L | KA2IR860LA1 |
| D | Fixture | Arcadyan | WN9722A-DM Test Jig | N/A |

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

1.5 Testing Location Information

| Testing Location | | | | |
|-------------------------------------|---------------|---|--------------------|-----------|
| <input type="checkbox"/> | HWA YA | ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973 | | |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085 | | |
| Test Condition | Test Site No. | Test Engineer | Test Environment | Test Date |
| DFS Site | DF01-CB | Jeff Wu | 22.2~24°C / 57~61% | 14-Jan-20 |

Test site Designation No. TW0006 with FCC
Test site registered number IC 4086D with Industry Canada.



2 Test Configuration of EUT

2.1 Test Channel Frequencies Configuration

| Test Channel Frequencies Configuration | |
|--|--------------------------|
| IEEE Std. | Test Channel Freq. (MHz) |
| 802.11ac (VHT80) | 5530 MHz |

2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Dynamic Frequency Selection (DFS) |
| Test Condition | Radiated measurement The EUT shall be configured to operate at the highest transmitter output power setting. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the lowest gain shall be used. The DFS radar test signals have been aligned to the direction corresponding to the EUT's maximum antenna gain. |
| Modulation Mode | 802.11ac (VHT80) |
| Operating Mode | EUT + antenna set 3 |



3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

| Table D.1: DFS requirement values | |
|-----------------------------------|---|
| Parameter | Value |
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds (Note 1). |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. (Notes 1 and 2). |
| U-NII Detection Bandwidth | Minimum 100% of the 99% power bandwidth (Note 3). |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

| Table D.2: Interference threshold values | |
|--|------------------|
| Maximum Transmit Power | Value (see note) |
| EIRP ≥ 200 mW | -64 dBm |
| EIRP < 200 mW and PSD < 10dBm/MHz | -62 dBm |
| EIRP < 200 mW and PSD ≥ 10dBm/MHz | -64 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911D01.



3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

| Requirement | DFS Operational mode | | |
|--|----------------------|--------------------------------|-----------------------------|
| | Master | Client without radar detection | Client with radar detection |
| <i>Non-Occupancy Period</i> | Yes | Not required | Yes |
| <i>DFS Detection Threshold</i> | Yes | Not required | Yes |
| <i>Channel Availability Check Time</i> | Yes | Not required | Not required |
| <i>U-NII Detection Bandwidth</i> | Yes | Not required | Yes |

3.1.3 Applicability of DFS Requirements during Normal Operation

| Requirement | DFS Operational mode | | |
|--|----------------------|--------------------------------|-----------------------------|
| | Master | Client without radar detection | Client with radar detection |
| <i>DFS Detection Threshold</i> | Yes | Not required | Yes |
| <i>Channel Closing Transmission Time</i> | Yes | Yes | Yes |
| <i>Channel Move Time</i> | Yes | Yes | Yes |
| <i>U-NII Detection Bandwidth</i> | Yes | Not required | Yes |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection |
|---|--|--|
| U-NII Detection Bandwidth and Statistical Performance Check | All BW modes must be tested | Not required |
| Channel Move Time and Channel Closing Transmission Time | Test using widest BW mode available | Test using the widest BW mode available for the link |
| All other tests | Any single BW mode | Not required |

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.



3.1.4 Channel Loading/Data Streaming

| | |
|-------------------------------------|--|
| <input type="checkbox"/> | The data file (MPEG-4) has been transmitting in a streaming mode. |
| <input checked="" type="checkbox"/> | Software to ping the client is permitted to simulate data transfer with random ping intervals. |
| <input checked="" type="checkbox"/> | Minimum channel loading of approximately 17%. |
| <input type="checkbox"/> | Unicast protocol has been used. |



3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (µsec) | PRI (µsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Trials |
|---|--------------------|---|--|--|----------------|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1A | 1 | 15 unique PRI in KDB 905462 D02 Table 5a | $\text{Roundup}\left\{\left(\frac{1}{360}\right) \times \left(\frac{19 \times 10^6}{PRI}\right)\right\}$ | 60% | 15 |
| 1B | 1 | 15 unique PRI within 518-3066, Excluding 1A PRI | | 60% | 15 |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. | | | | | |

A minimum of 30 unique waveforms are required for each of the short pulse radar types 1 through 4. If more than 30 waveforms are used for short pulse radar types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

3.2.2 Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (µsec) | Chirp Width (MHz) | PRI (µsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|----------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and



ends at 5310 MHz.

- ♦ If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- ♦ The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length (12,000,000 / Burst Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst Count) - (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

3.2.3 Frequency Hopping Radar Test Waveform


| Radar Type | Pulse Width (µsec) | PRI (µsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (ms) | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|------------|----------------|--------------------|------------------------------|--|----------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

3.2.4 DFS Threshold Level


| DFS Threshold Level | |
|--|---|
| DFS Threshold level: -63 dBm | <input type="checkbox"/> at the antenna connector |
| | <input checked="" type="checkbox"/> in front of the antenna |
| The Interference Radar Detection Threshold Level is is $-64 \text{ dBm} + 0 \text{ [dBi]} + 1 \text{ dB} = -63 \text{ dBm}$. That had been taken into account the output power range and antenna gain. | |

3.2.5 Calibration Setup

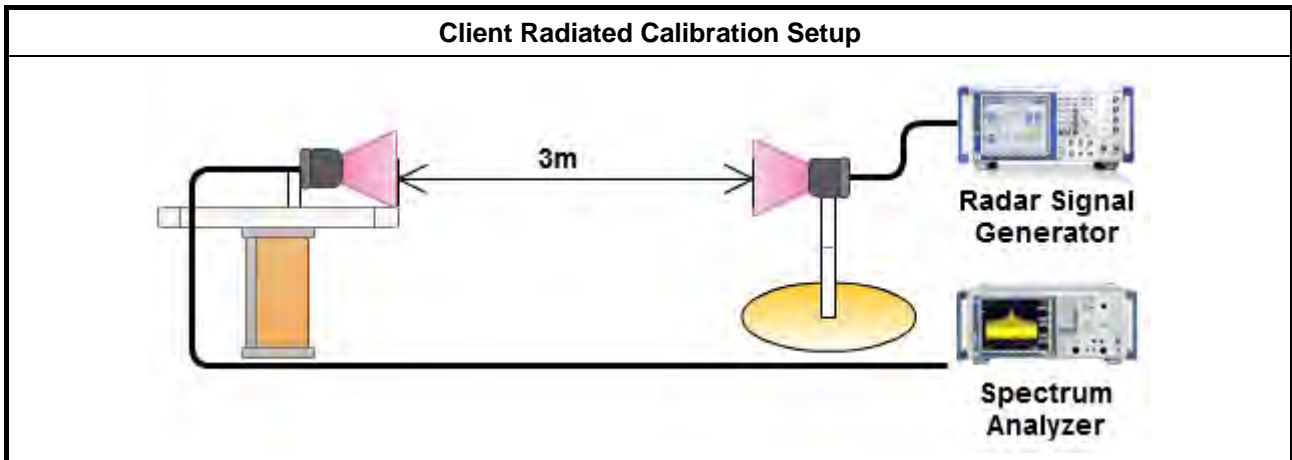




3.2.6 Radar Waveform calibration Plot

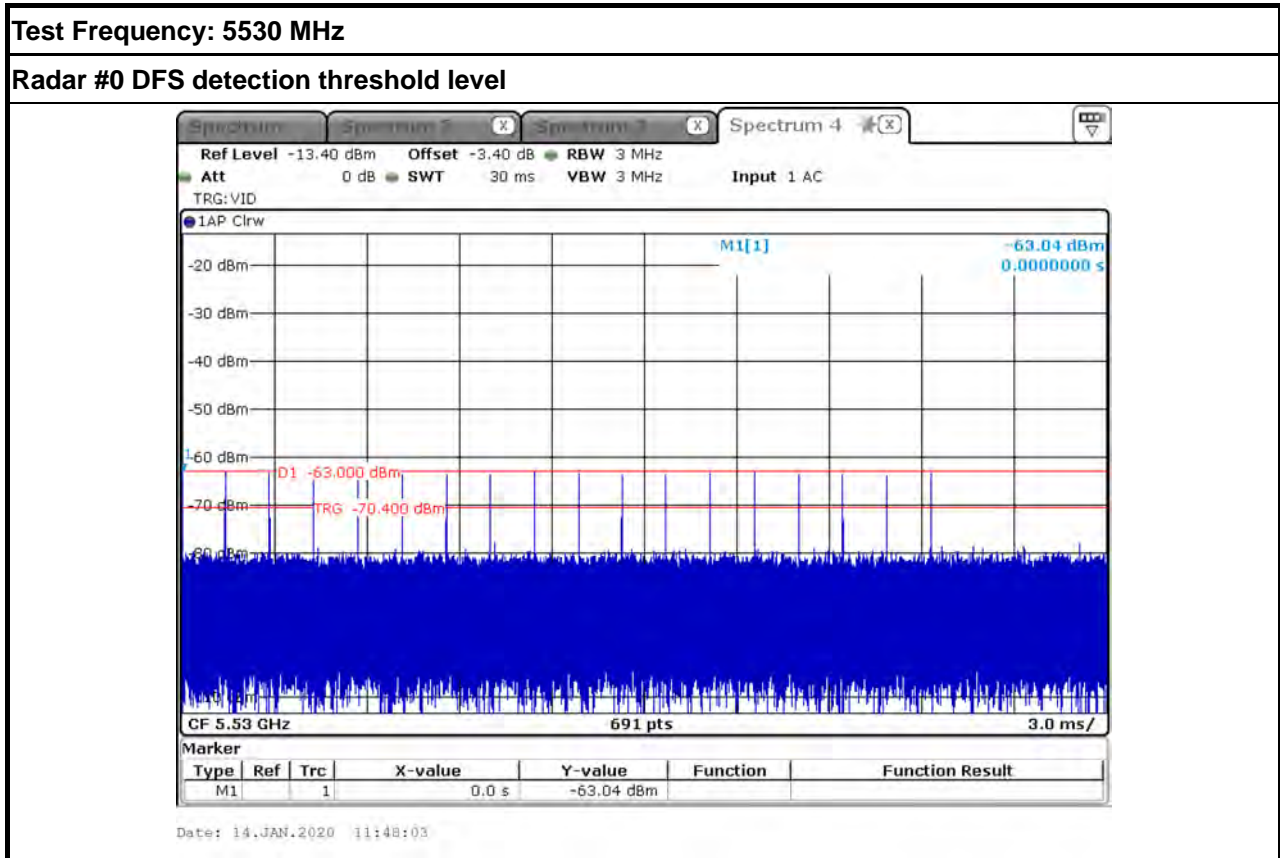



3.2.7 Test Setup


A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

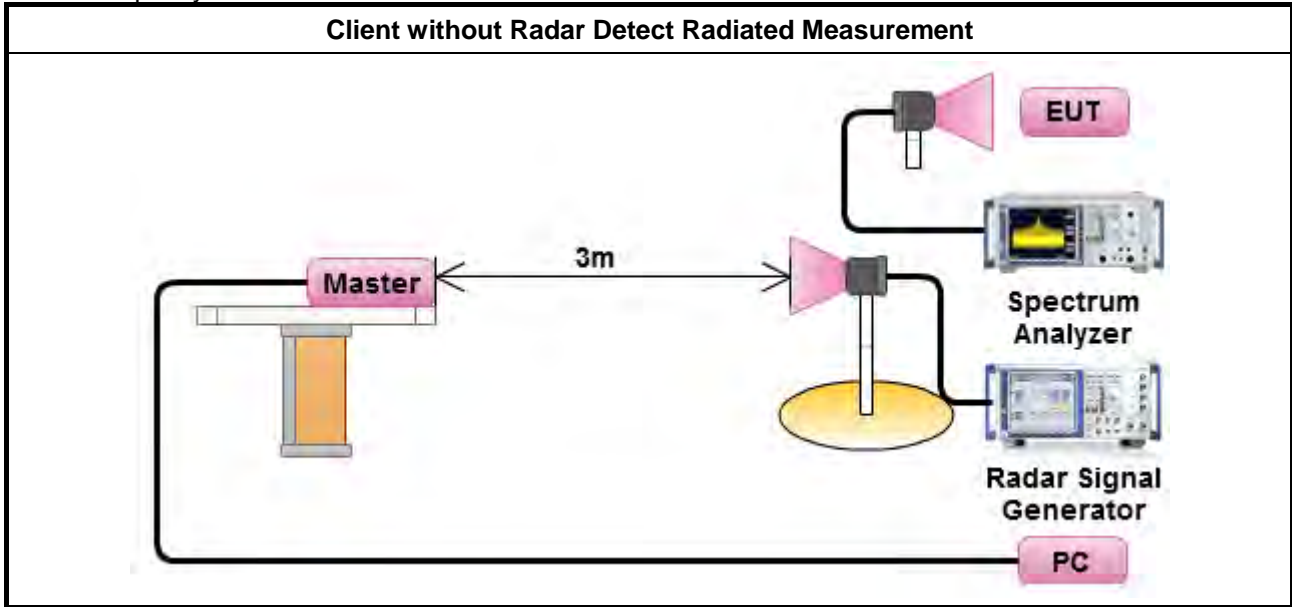



3.2.8 Data traffic Plot

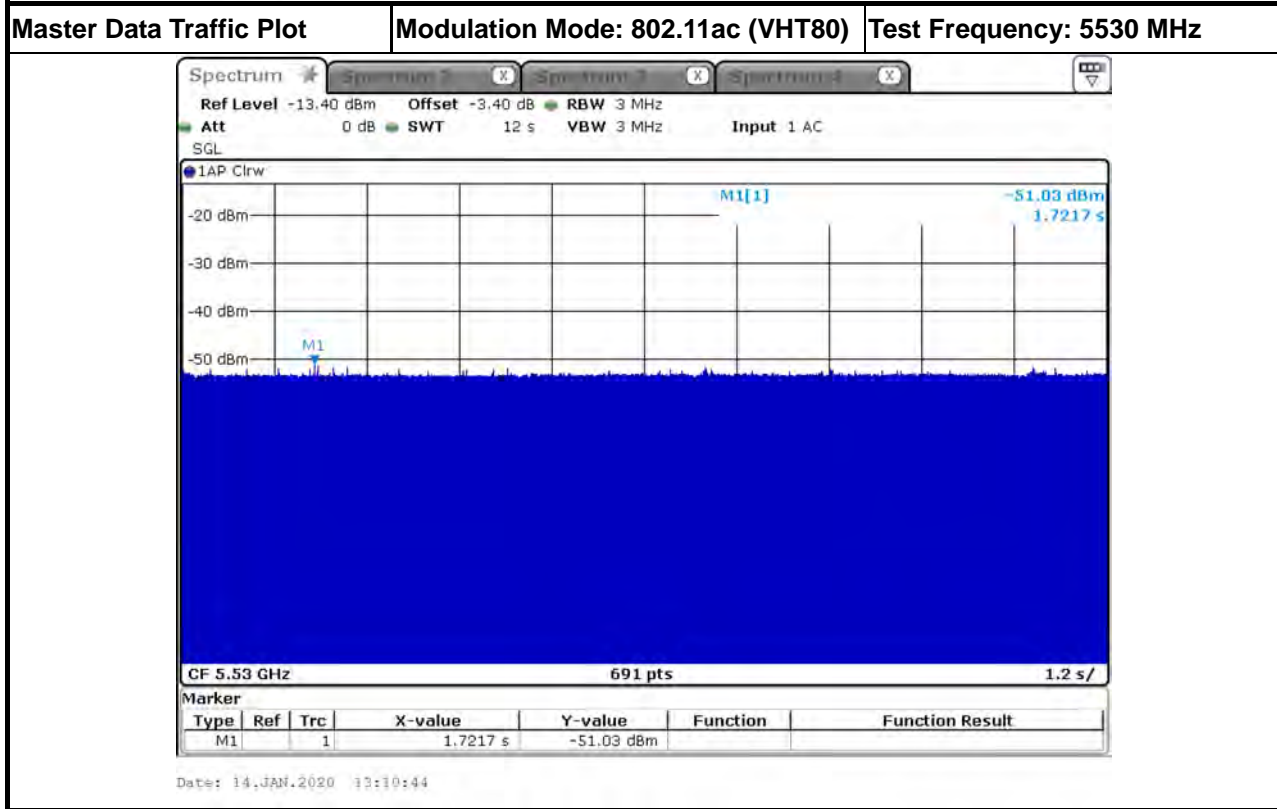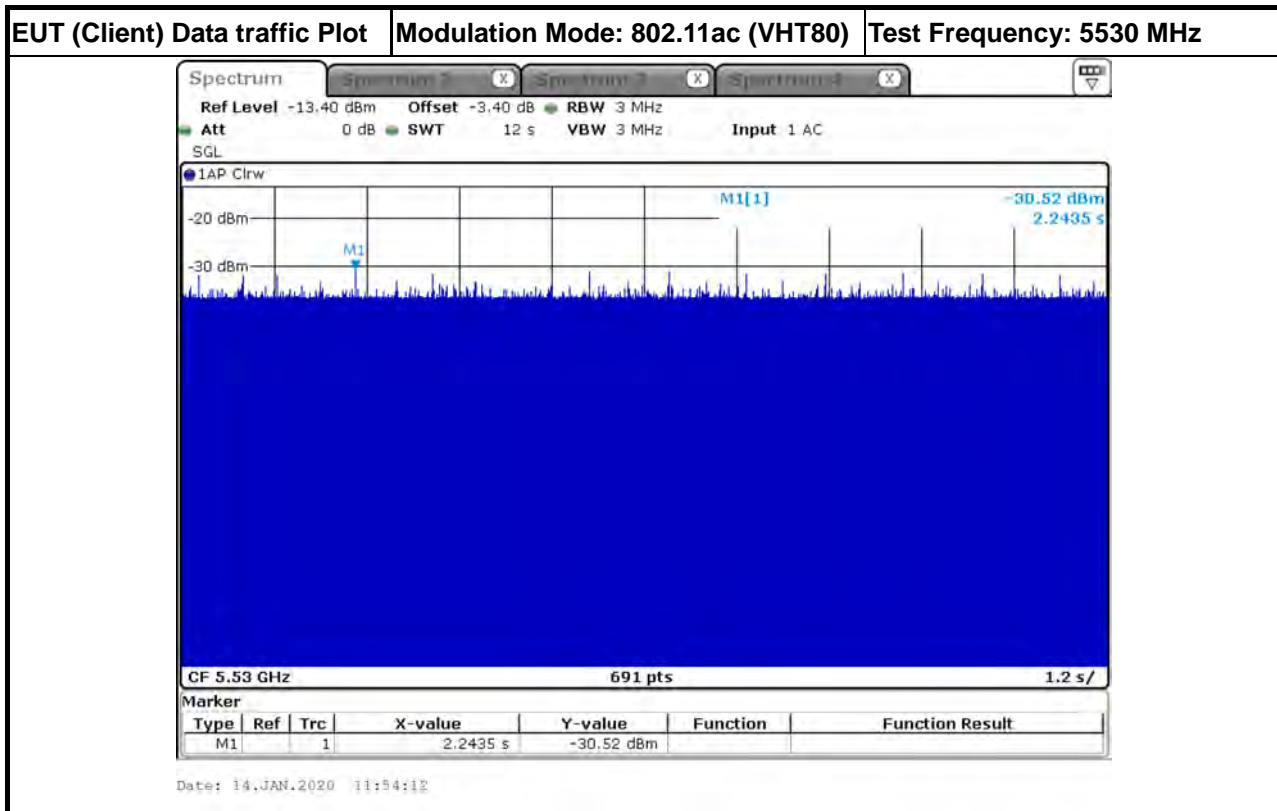

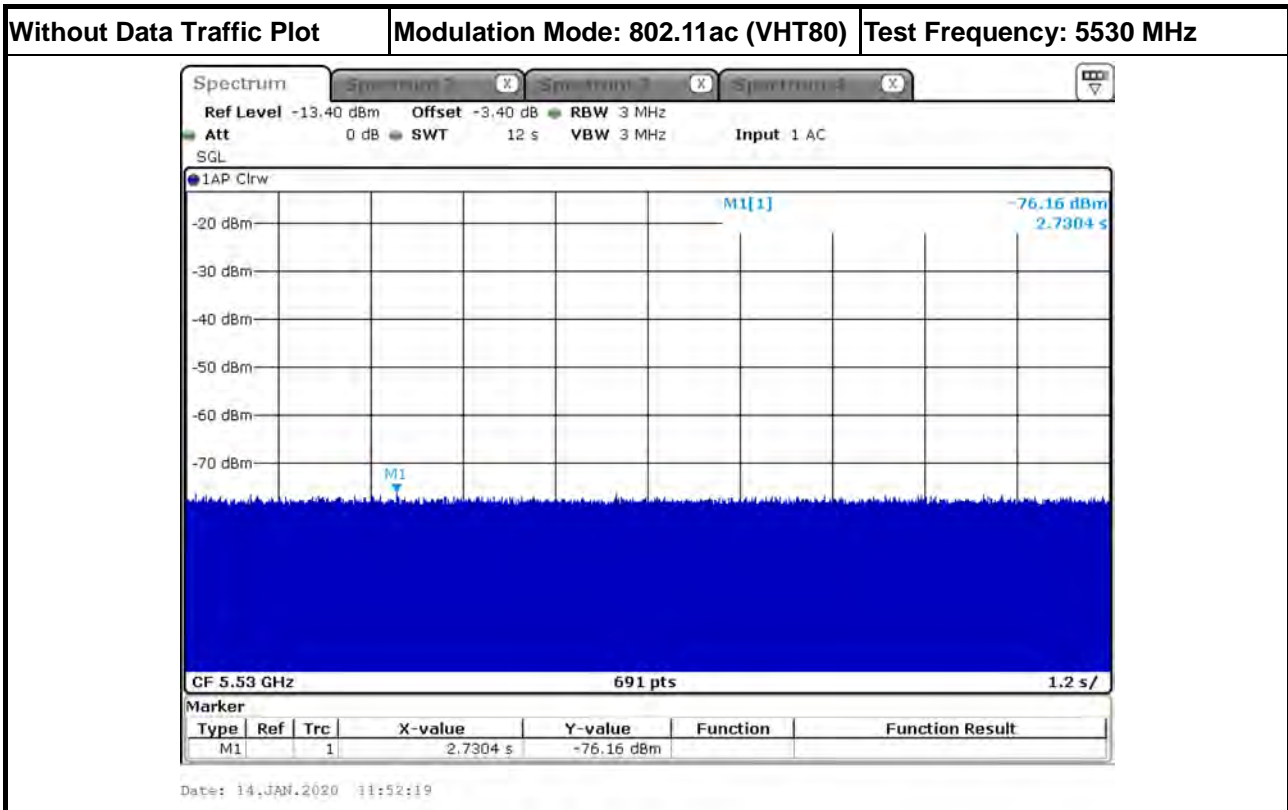



3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

| In-service Monitoring Limit | |
|-----------------------------------|---|
| Channel Move Time | 10 sec |
| Channel Closing Transmission Time | 200 ms + an aggregate of 60 ms over remaining 10 sec periods. |
| Non-occupancy period | Minimum 30 minutes |

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


| Test Method | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits. |
| <input checked="" type="checkbox"/> | Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 12 sec plot needs to be reported for the Short Pulse Radar Types 0. And zoom-in a 60 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move. |
| <input checked="" type="checkbox"/> | Verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits. |



3.3.4 Test Result of Channel Move Time

Modulation Mode: 802.11ac (VHT80)

| Parameter | Test Result | Limit |
|--------------------------|-------------|-------|
| | Type 0 | |
| Test Channel (MHz) | 5530 MHz | - |
| Channel Move Time (sec.) | 3.965 | < 10s |

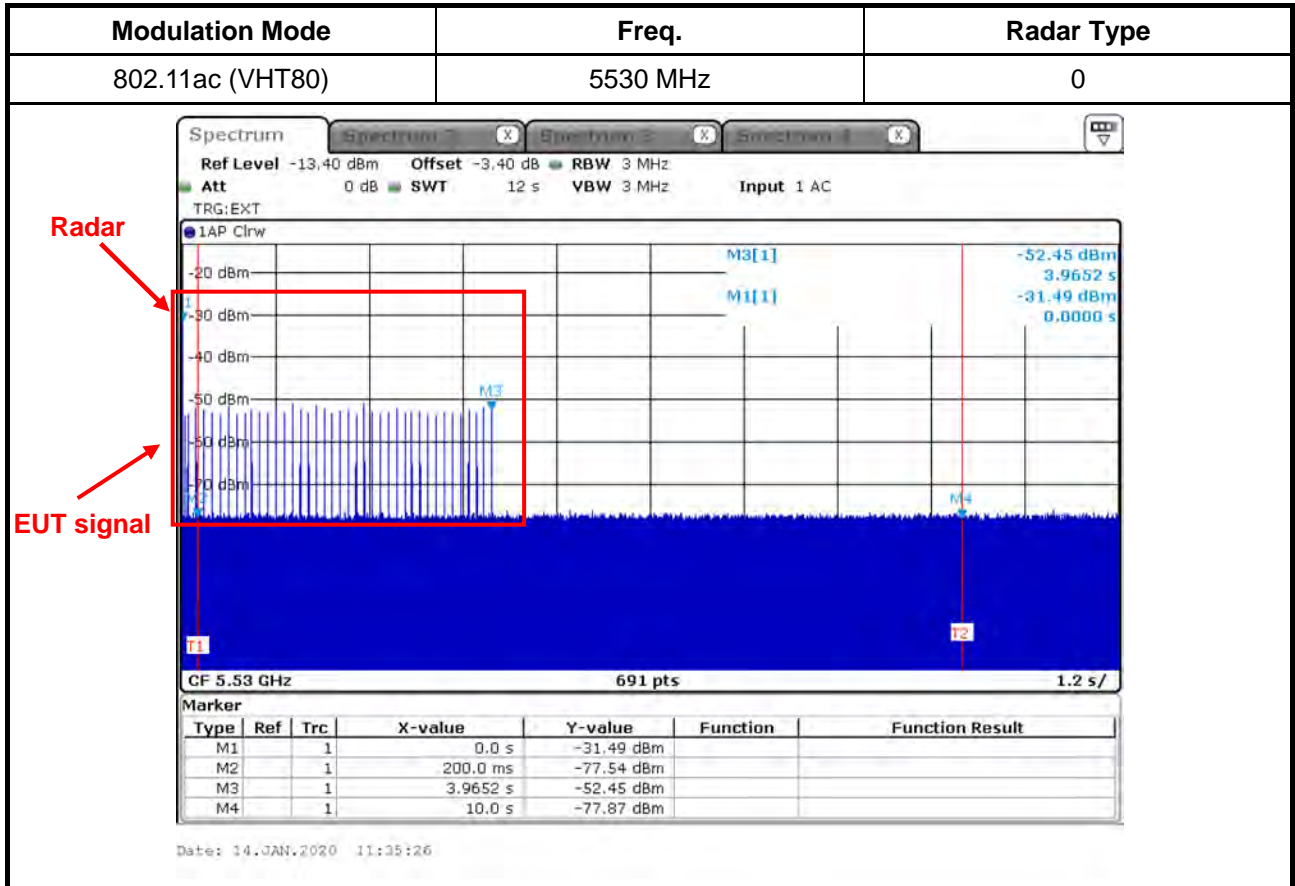



3.3.5 Test Result of Channel Closing Transmission Time

Modulation Mode: 802.11ac (VHT80)


| Parameter | Test Result | Limit |
|---|-------------|--------|
| | Type 0 | |
| Test Channel (MHz) | 5530 MHz | - |
| Channel Closing Transmission Time (ms) (Note) | 22.19 | < 60ms |

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.



| | | |
|------------------------|--------------|-------------------|
| Modulation Mode | Freq. | Radar Type |
| 802.11ac (VHT80) | 5530 MHz | 0 |

Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus 60ms additional intermittent control signals

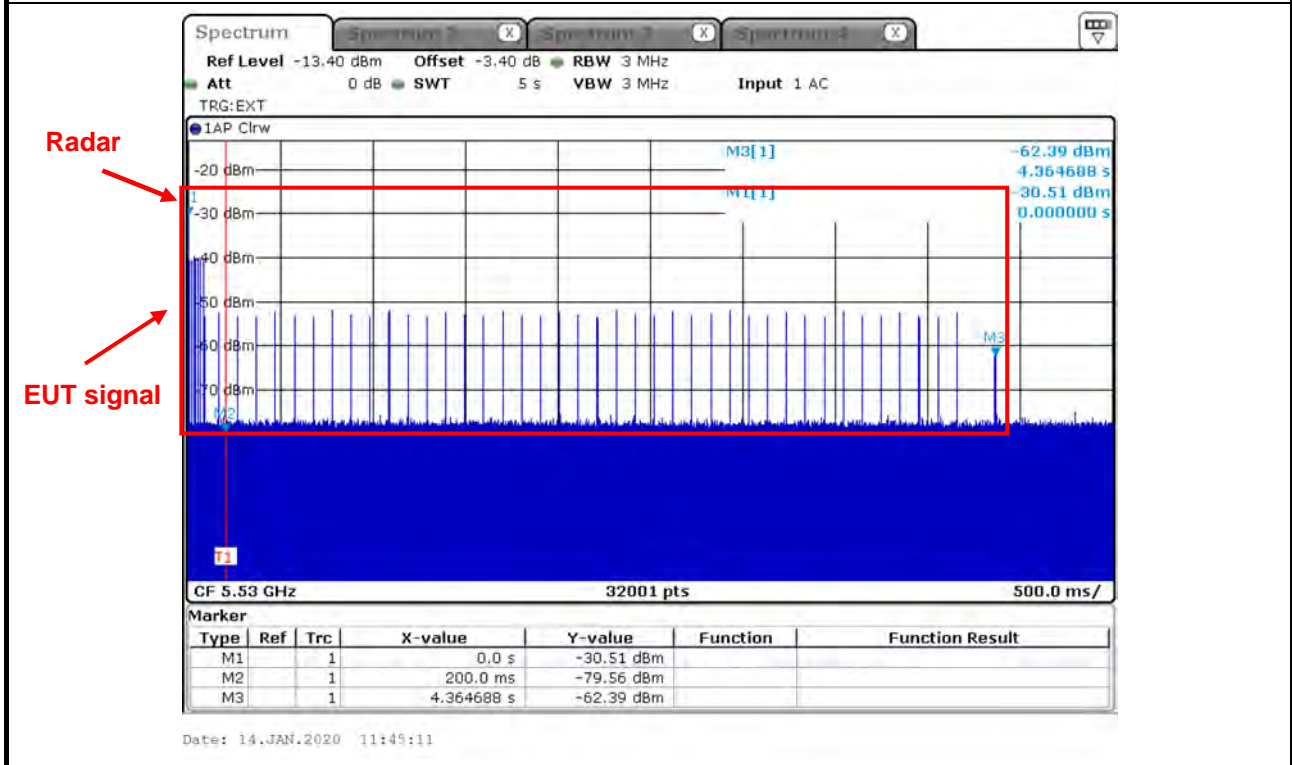

Dwell is the dwell time per spectrum analyzer sampling bin.

S is the sweep time

B is the number of spectrum analyzer sampling bins

C is the intermittent control signals of Channel Closing Transmission Time

N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission

Dwell (0.156 ms) = S (5000 ms) / B (32000)

C (22.19 ms) = N (142) X Dwell (0.156 ms)



3.3.6 Test Result of Non-Occupancy Period

Modulation Mode: 802.11ac (VHT80)


| Parameter | Test Result | Limit |
|-----------------------------|-------------|---------------|
| | Type 0 | |
| Test Channel (MHz) | 5530 MHz | - |
| Non-Occupancy Period (min.) | ≥ 30 | ≥ 30 min |



| | |
|------------------------|--------------|
| Modulation Mode | Freq. |
| 802.11ac (VHT80) | 5530 MHz |

Non-Occupancy Period

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

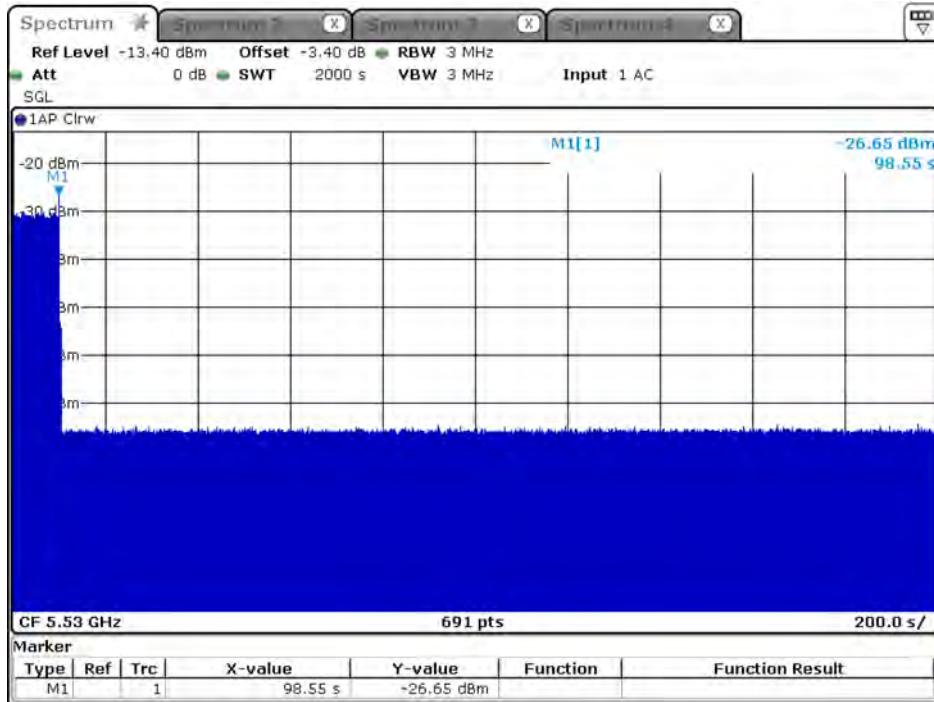


Date: 14 JAN 2020 12:29:27



Non-associated test

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

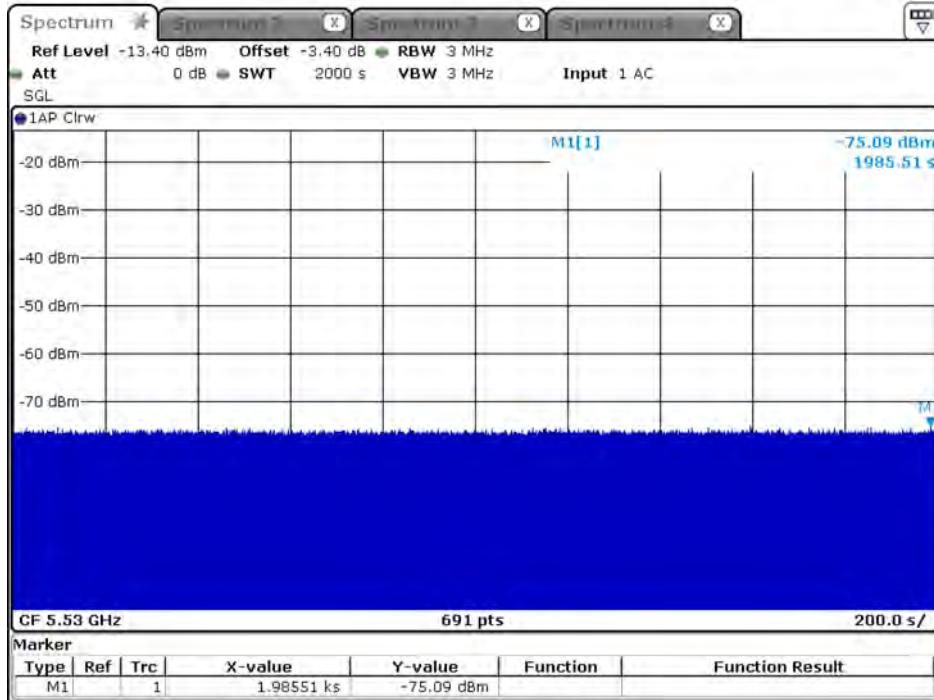

Date: 14.JAN.2020 13:05:18



4 Test Equipment and Calibration Data

| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|-------------------------|-----------|-----------|---------------|-----------------|------------------|----------------------|--------------------|
| Spectrum Analyzer | R&S | FSV40 | 101026 | 9kHz~40GHz | Oct. 03, 2019 | Oct. 02, 2020 | Radiated (DF01-CB) |
| Vector Signal generator | R&S | SMU200A | 102782 | 100kHz-6GHz | Jan. 16, 2019 | Jan. 15, 2020 | Radiated (DF01-CB) |
| Horn Antenna | COM-POWER | AH-118 | 071187 | 1GHz – 18GHz | Jul. 02, 2019 | Jul. 01, 2020 | Radiated (DF01-CB) |
| Horn Antenna | COM-POWER | AH-118 | 071042 | 1GHz – 18GHz | Dec. 20, 2019 | Dec. 19, 2020 | Radiated (DF01-CB) |
| RF Power Divider | MTJ | 2 Way | DFS-01-DV-02 | 1GHz ~ 6GHz | Oct. 07, 2019 | Oct. 06, 2020 | Radiated (DF01-CB) |
| RF Power Divider | MTJ | 2 Way | DFS-01-DV-03 | 1GHz ~ 6GHz | Oct. 07, 2019 | Oct. 06, 2020 | Radiated (DF01-CB) |
| RF Power Divider | MTJ | 4 Way | DFS-01-DV-01 | 1GHz ~ 6GHz | Oct. 07, 2019 | Oct. 06, 2020 | Radiated (DF01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-57 | 1 GHz –18 GHz | Oct. 07, 2019 | Oct. 06, 2020 | Radiated (DF01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-58 | 1 GHz –18 GHz | Oct. 07, 2019 | Oct. 06, 2020 | Radiated (DF01-CB) |

Note: Calibration Interval of instruments listed above is one year.



5 Measurement Uncertainty

| Test Items | Uncertainty | Remark |
|-------------------|-------------|--------------------------|
| Radiated Emission | 3.4 dB | Confidence levels of 95% |